




Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 180 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax80/Band1	Temp./Humi.	:23.9/62
Frequency	:5210 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

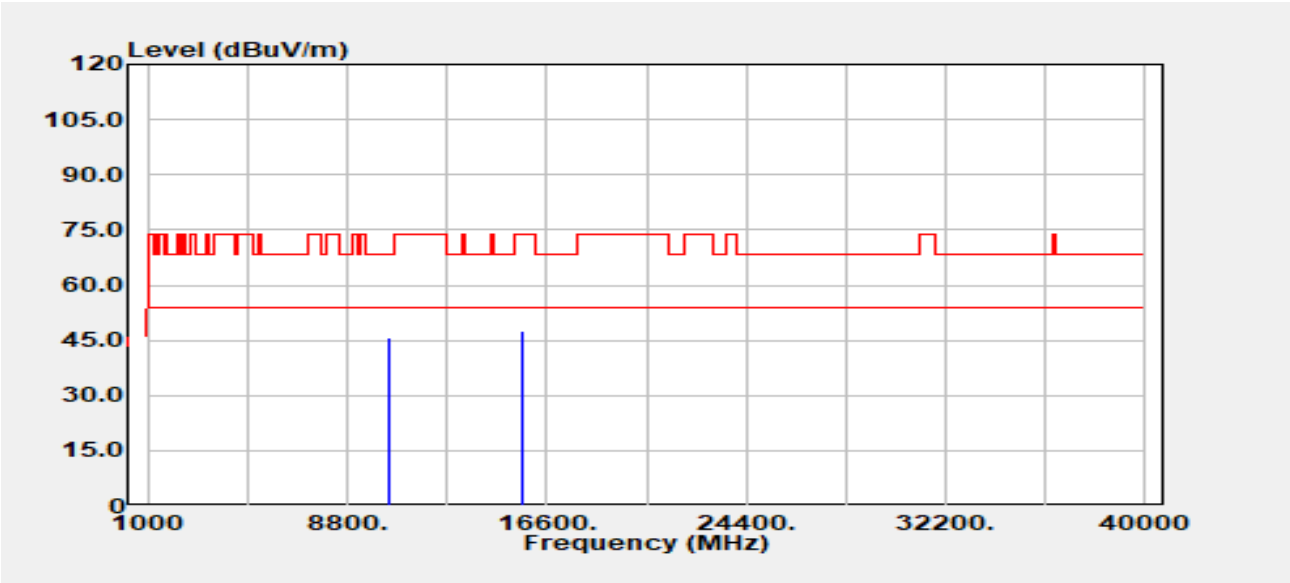


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.00	Peak	32.85	12.91	45.77	68.20	-22.43
15630.00	Peak	31.99	15.41	47.40	74.00	-26.60
15630.00	Average	25.62	15.41	41.04	54.00	-12.96



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 181 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax80/Band1	Temp./Humi.	:23.9/62
Frequency	:5210 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

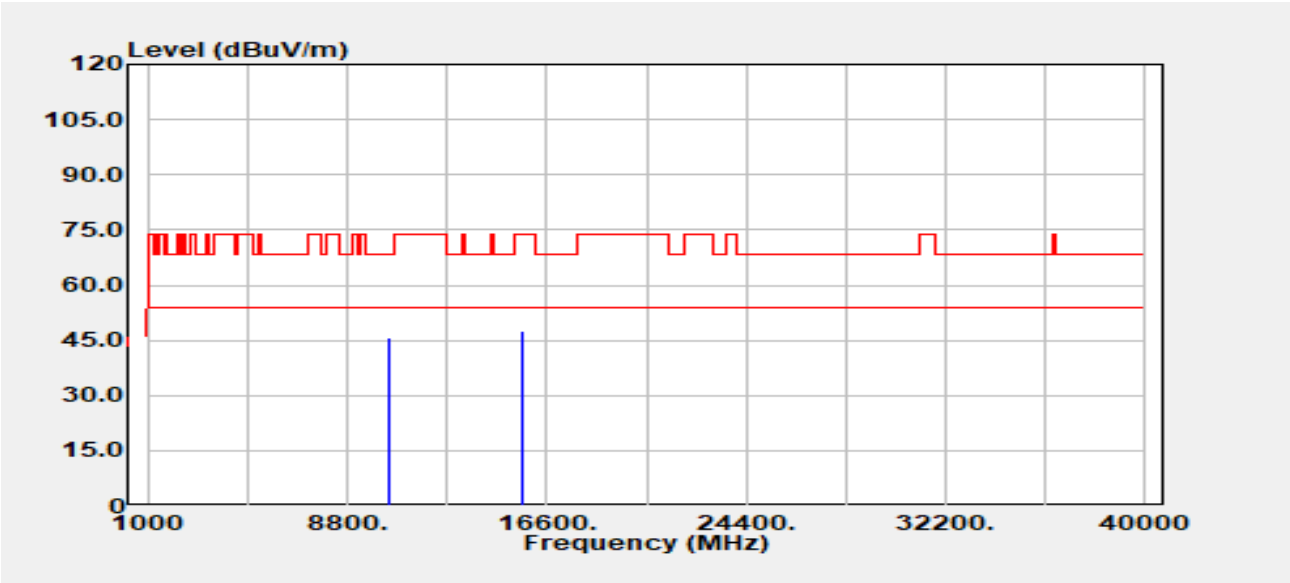


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.00	Peak	32.60	12.91	45.51	68.20	-22.69
15630.00	Peak	32.08	15.41	47.50	74.00	-26.50
15630.00	Average	25.54	15.41	40.96	54.00	-13.05

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 182 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12

Test Date :2024-09-05
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

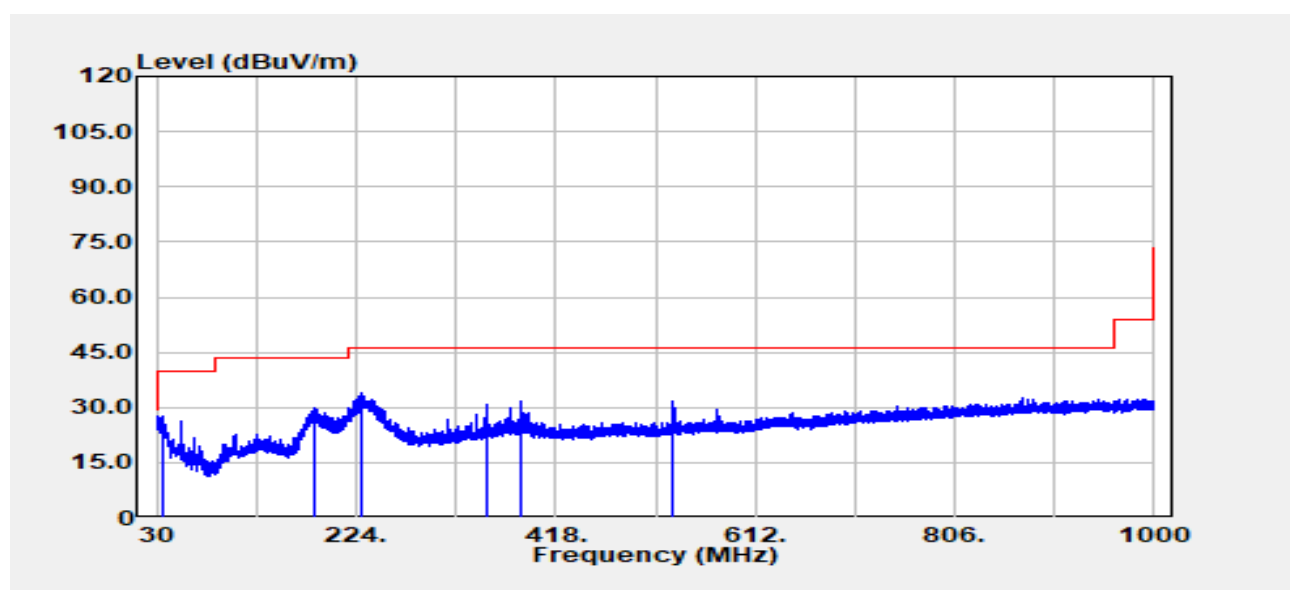


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
34.80	Peak	33.85	-6.31	27.55	40.00	-12.45
183.10	Peak	42.04	-12.20	29.84	43.50	-13.66
229.50	Peak	46.16	-12.09	34.07	46.00	-11.93
350.00	Peak	39.17	-8.28	30.89	46.00	-15.11
383.90	Peak	38.95	-7.38	31.57	46.00	-14.43
531.80	Peak	35.48	-3.91	31.57	46.00	-14.43

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 183 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ac80/Band2
Frequency :5290 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12

Test Date :2024-09-05
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

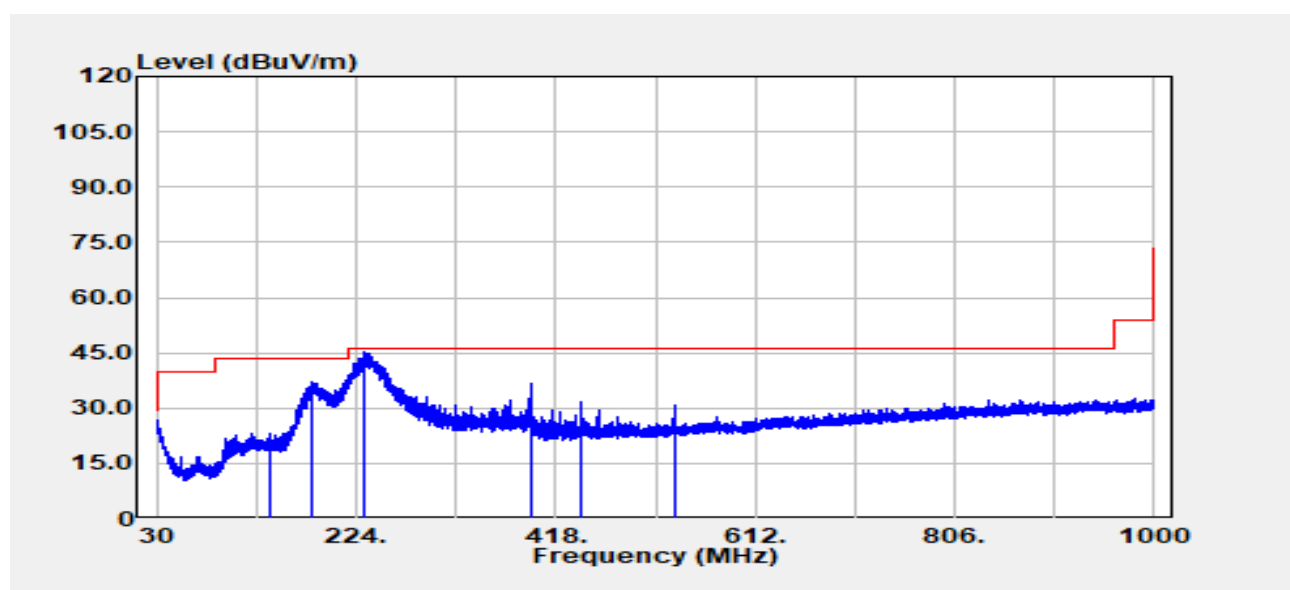


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
139.50	Peak	33.79	-10.57	23.22	43.50	-20.28
181.10	Peak	49.26	-12.28	36.98	43.50	-6.52
231.30	QP	52.22	-11.97	40.24	46.00	-5.76
394.30	Peak	43.73	-6.92	36.81	46.00	-9.19
442.20	Peak	37.26	-5.51	31.75	46.00	-14.25
532.90	Peak	34.85	-3.92	30.93	46.00	-15.07



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 184 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH0	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

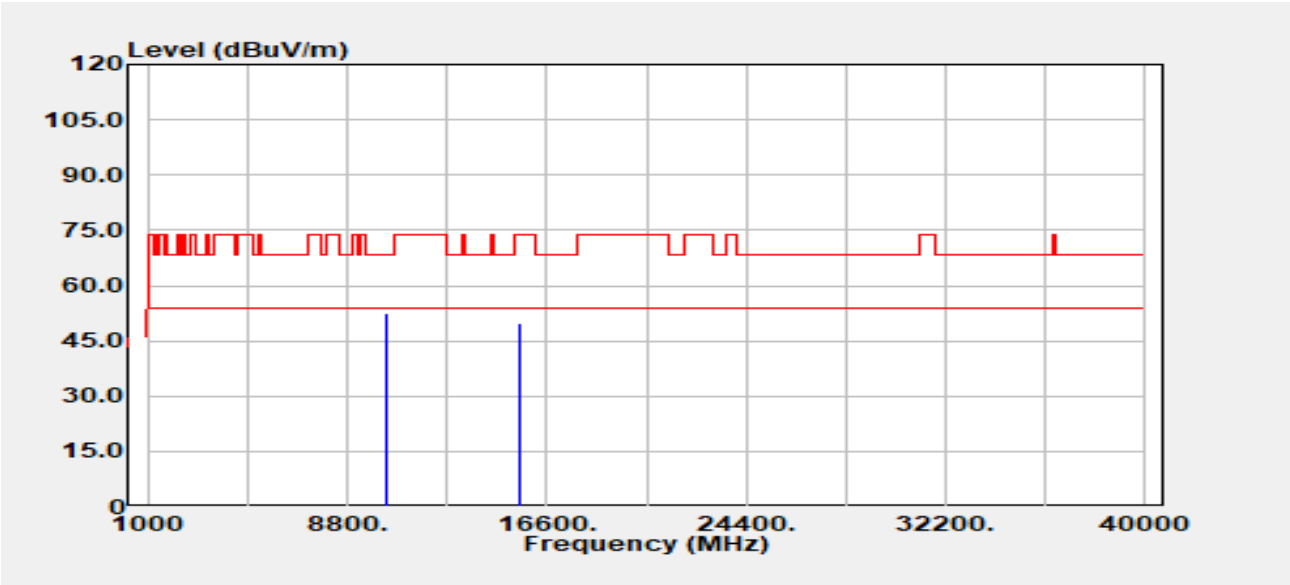


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	39.85	12.85	52.70	68.20	-15.50
15780.00	Peak	34.97	14.87	49.84	74.00	-24.16
15780.00	Average	27.91	14.87	42.78	54.00	-11.22



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 185 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH0	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

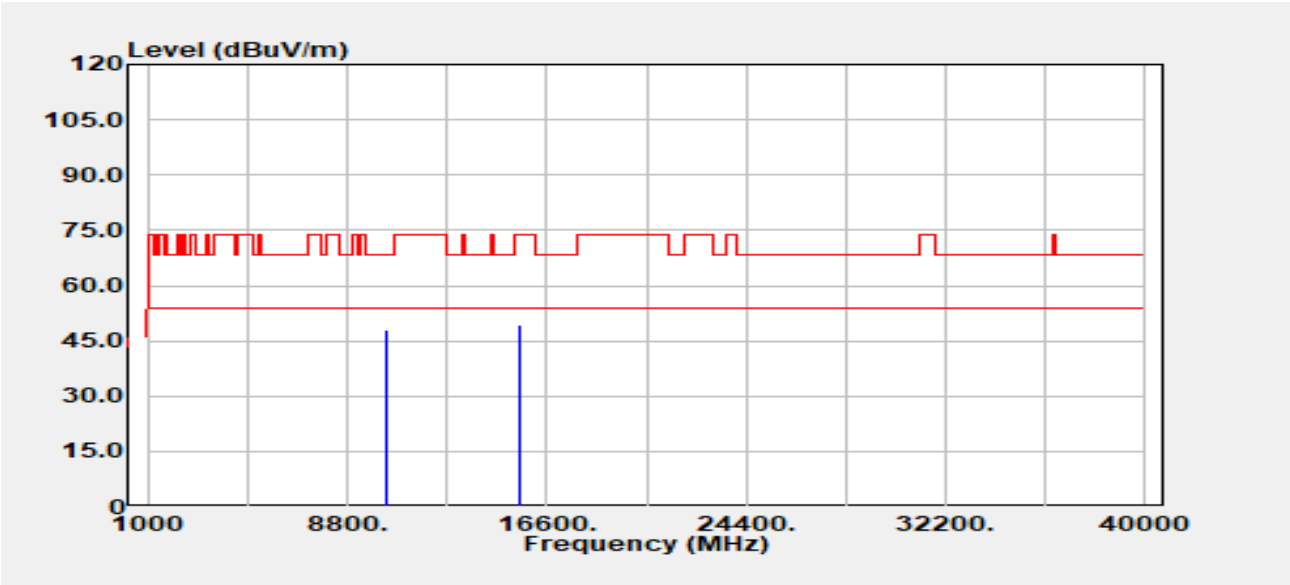


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	34.98	12.85	47.83	68.20	-20.37
15780.00	Peak	34.28	14.87	49.16	74.00	-24.84
15780.00	Average	27.90	14.87	42.77	54.00	-11.23



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 186 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH0	Temp./Humi.	:24.6/57
Frequency	:5280 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

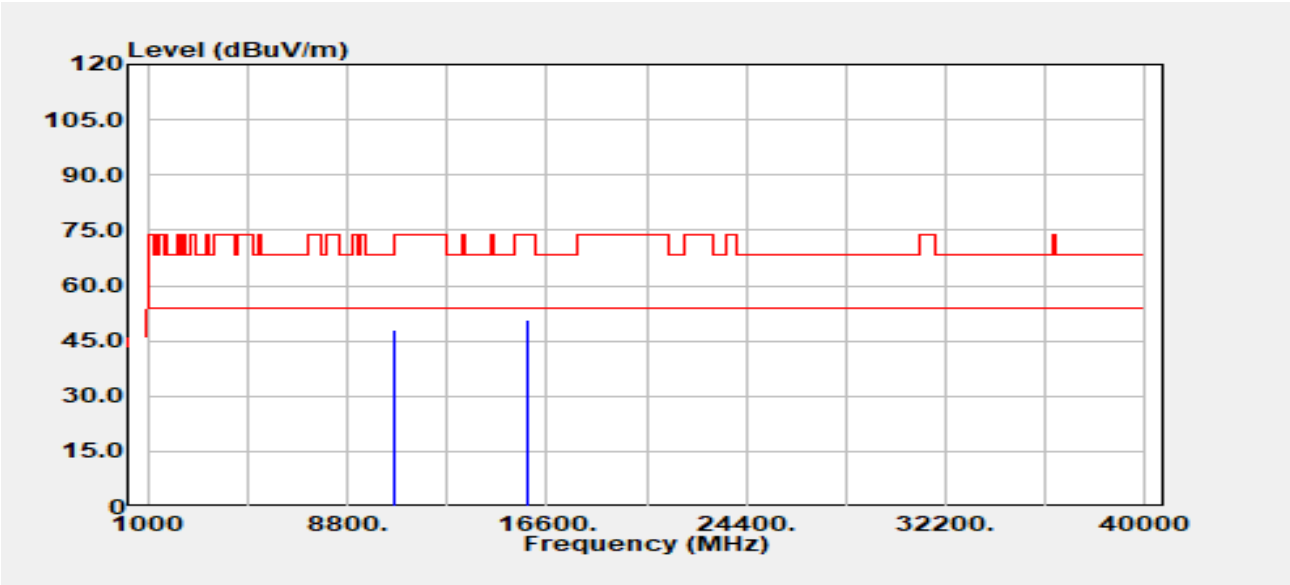


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10560.00	Peak	35.22	12.96	48.18	68.20	-20.02
15840.00	Peak	34.32	16.19	50.51	74.00	-23.49
15840.00	Average	28.14	16.19	44.33	54.00	-9.67



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 187 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH0	Temp./Humi.	:24.6/57
Frequency	:5280 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

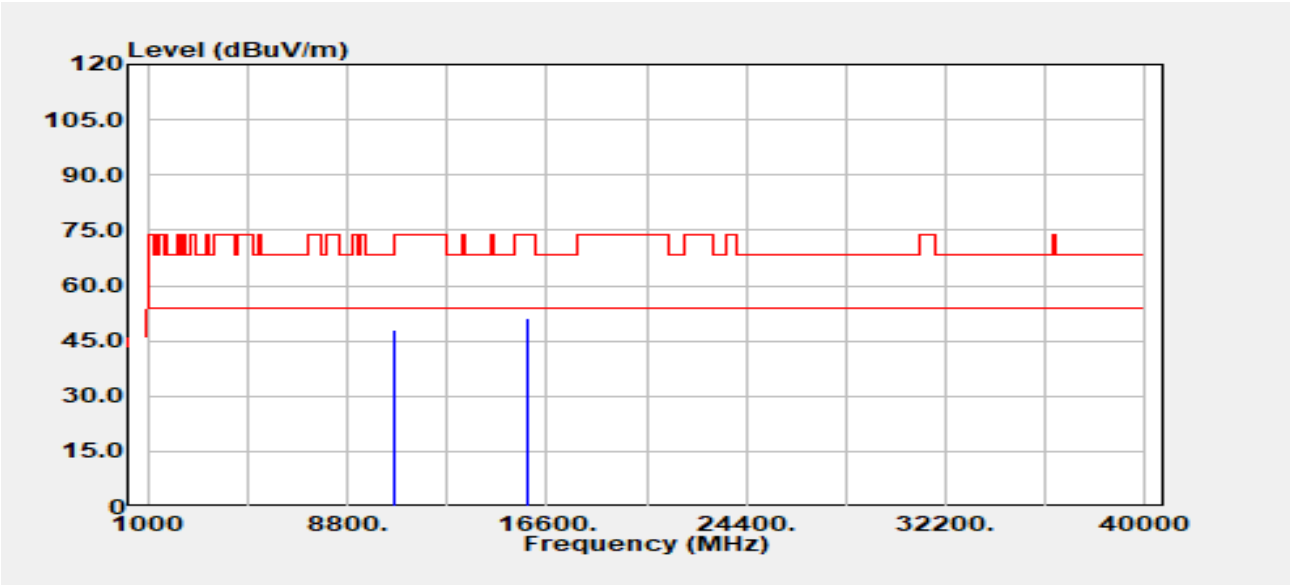


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10560.00	Peak	34.89	12.96	47.85	68.20	-20.35
15840.00	Peak	34.96	16.19	51.15	74.00	-22.85
15840.00	Average	28.19	16.19	44.38	54.00	-9.62



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 188 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH0	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

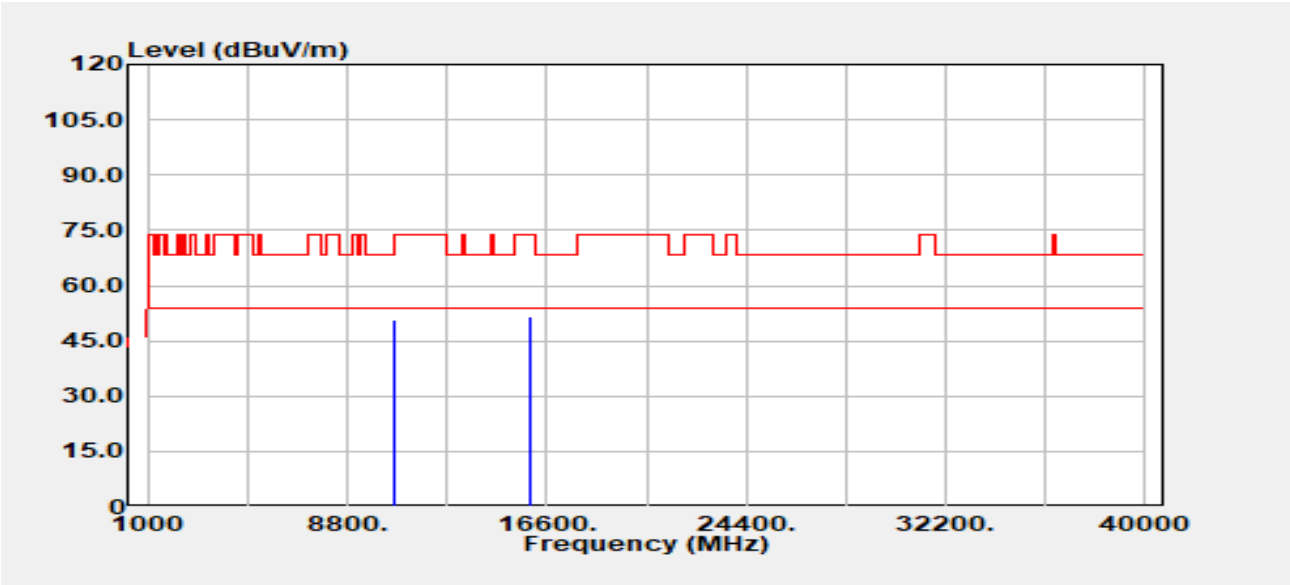


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	37.45	13.04	50.49	74.00	-23.51
10640.00	Average	31.57	13.04	44.62	54.00	-9.38
15960.00	Peak	34.19	17.41	51.60	74.00	-22.40
15960.00	Average	27.46	17.41	44.87	54.00	-9.13



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 189 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH0	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

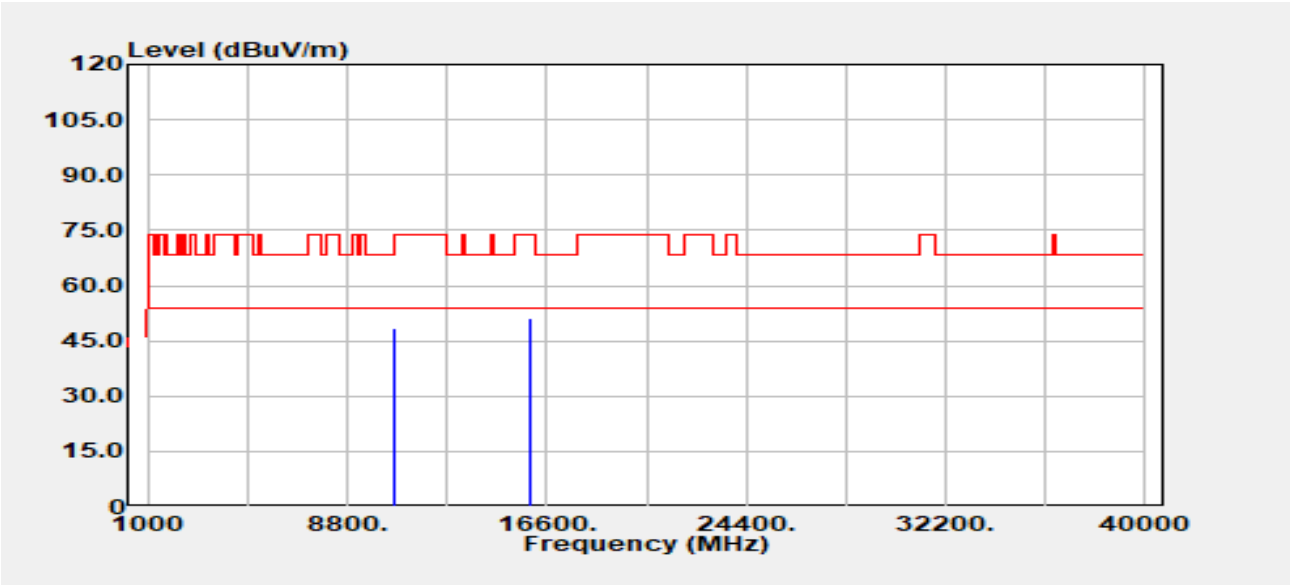


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	35.30	13.04	48.34	74.00	-25.66
10640.00	Average	30.07	13.04	43.11	54.00	-10.89
15960.00	Peak	33.92	17.41	51.33	74.00	-22.67
15960.00	Average	27.30	17.41	44.71	54.00	-9.29



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 190 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH1	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

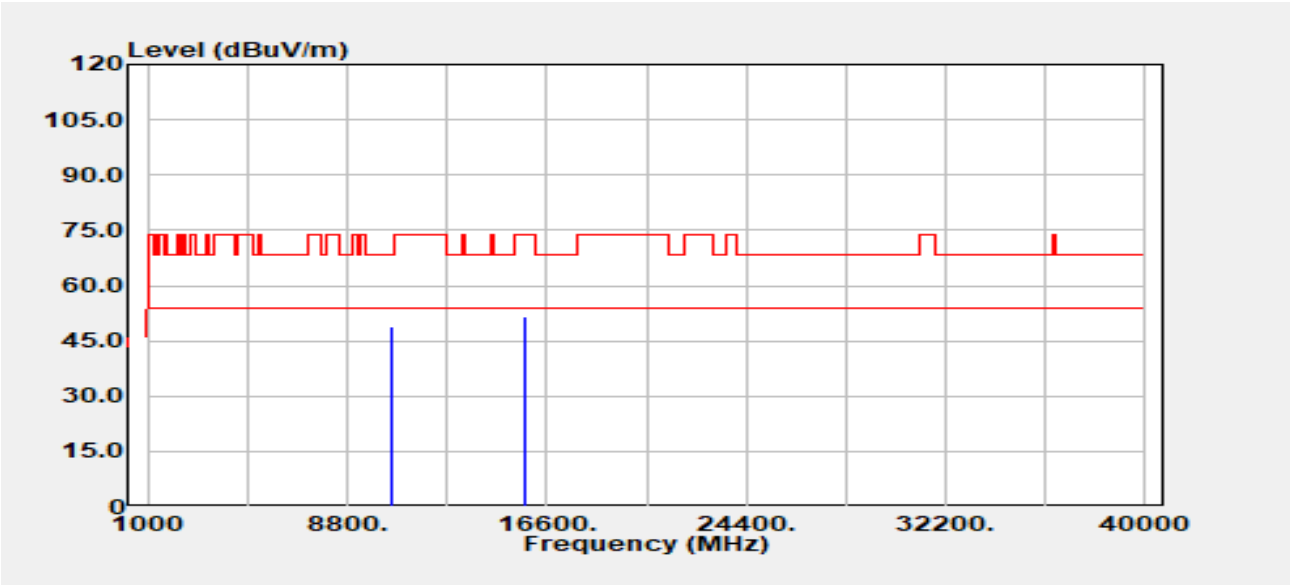


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	36.30	12.78	49.08	68.20	-19.12
15780.00	Peak	35.43	16.08	51.51	74.00	-22.49
15780.00	Average	28.14	16.08	44.22	54.00	-9.78



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 191 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH1	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

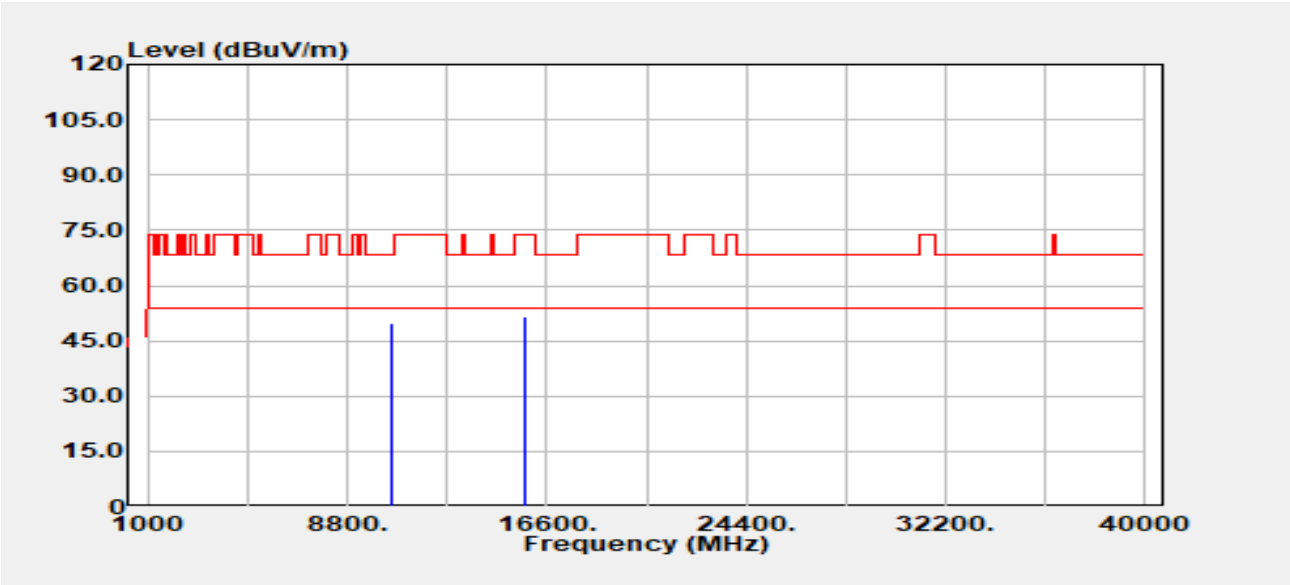


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	37.03	12.78	49.81	68.20	-18.39
15780.00	Peak	35.76	16.08	51.84	74.00	-22.16
15780.00	Average	28.17	16.08	44.24	54.00	-9.76



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 192 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH1	Temp./Humi.	:24.6/57
Frequency	:5280 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

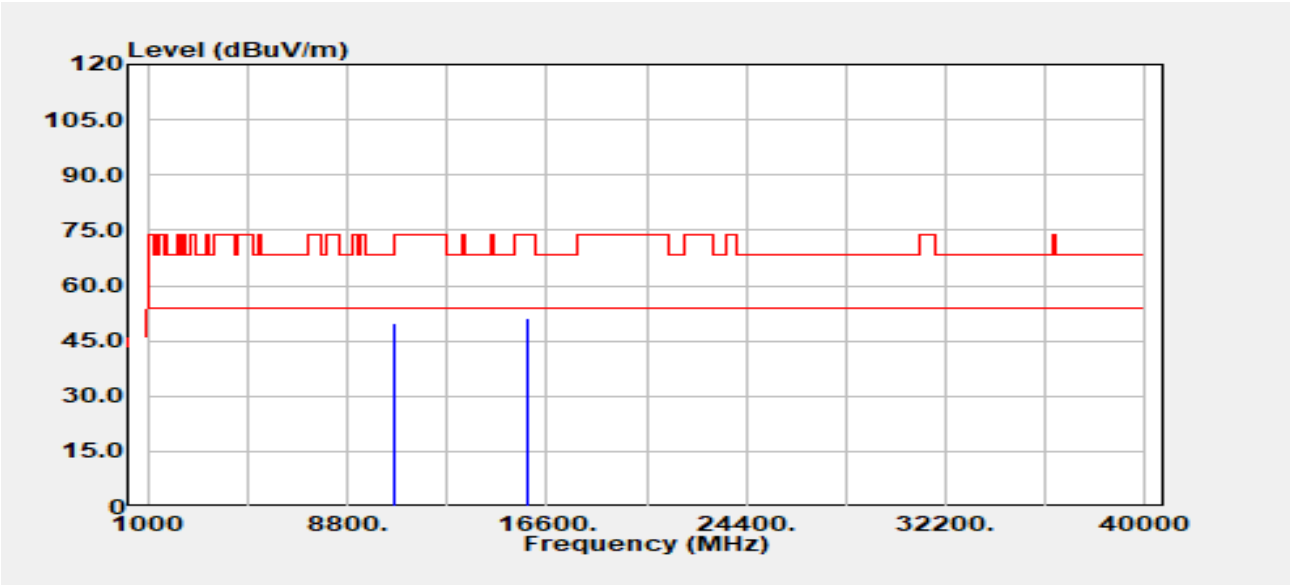


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10560.00	Peak	36.65	12.96	49.61	68.20	-18.59
15840.00	Peak	35.15	16.19	51.34	74.00	-22.66
15840.00	Average	28.02	16.19	44.21	54.00	-9.79



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 193 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH1	Temp./Humi.	:24.6/57
Frequency	:5280 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

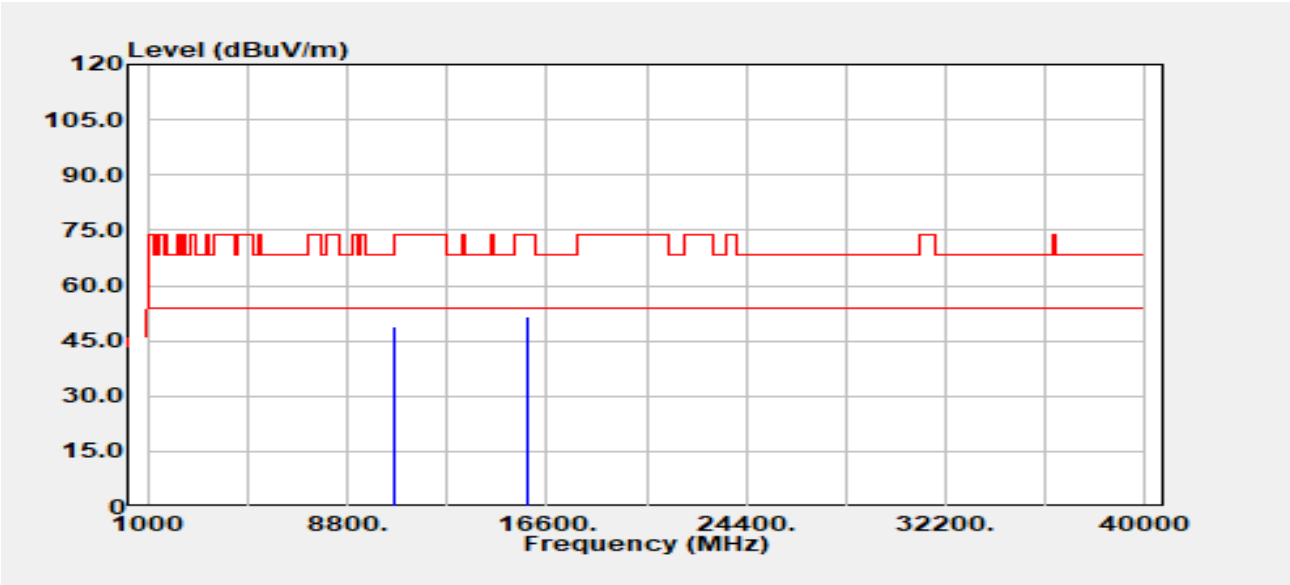


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10560.00	Peak	36.17	12.96	49.13	68.20	-19.07
15840.00	Peak	35.51	16.19	51.70	74.00	-22.30
15840.00	Average	28.04	16.19	44.23	54.00	-9.77

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 194 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH1	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

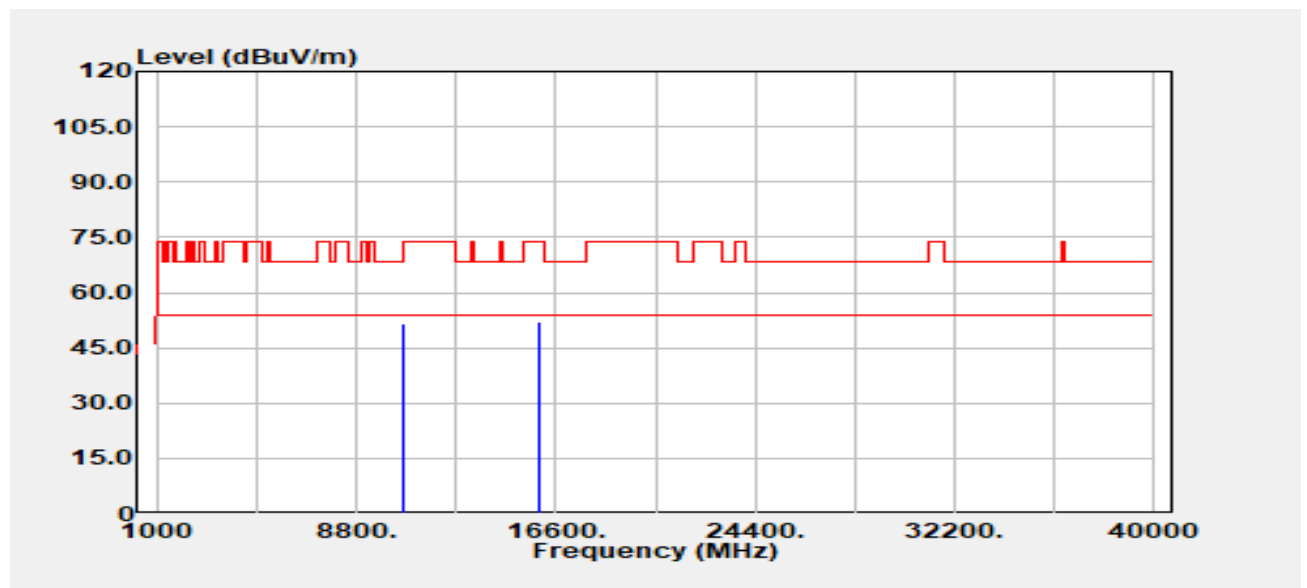


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	38.42	13.04	51.46	74.00	-22.54
10640.00	Average	31.37	13.04	44.41	54.00	-9.59
15960.00	Peak	34.89	17.41	52.30	74.00	-21.70
15960.00	Average	27.45	17.41	44.86	54.00	-9.14



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 195 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band2_CH1	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

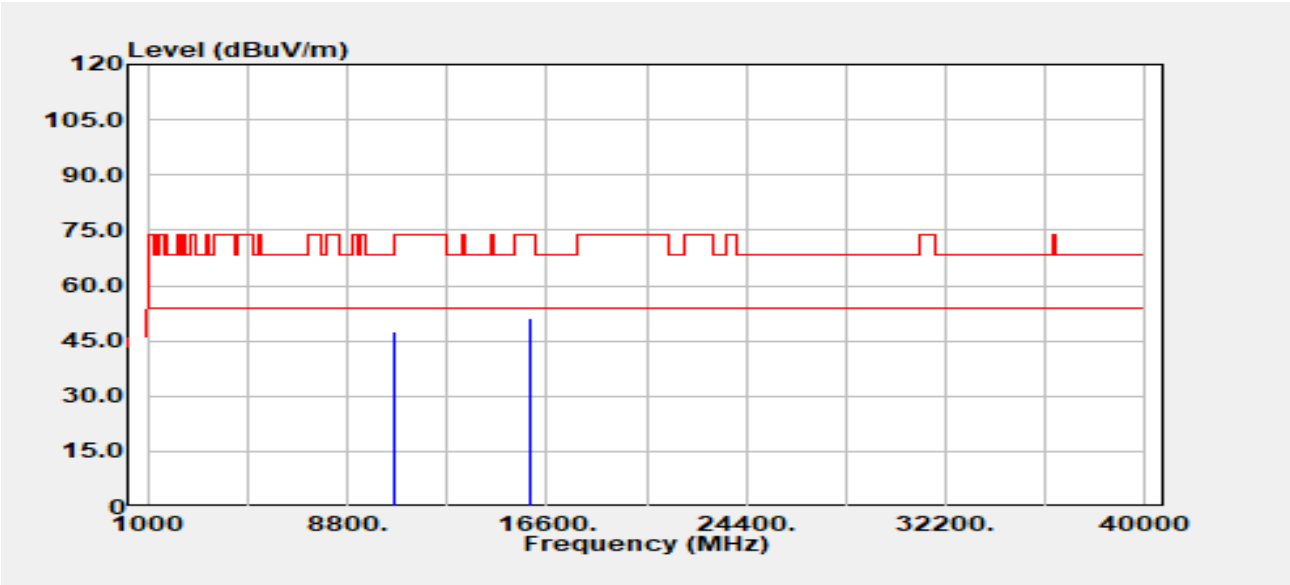


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	34.71	13.04	47.76	74.00	-26.24
10640.00	Average	29.75	13.04	42.80	54.00	-11.20
15960.00	Peak	33.57	17.41	50.98	74.00	-23.02
15960.00	Average	27.51	17.41	44.92	54.00	-9.08



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 196 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

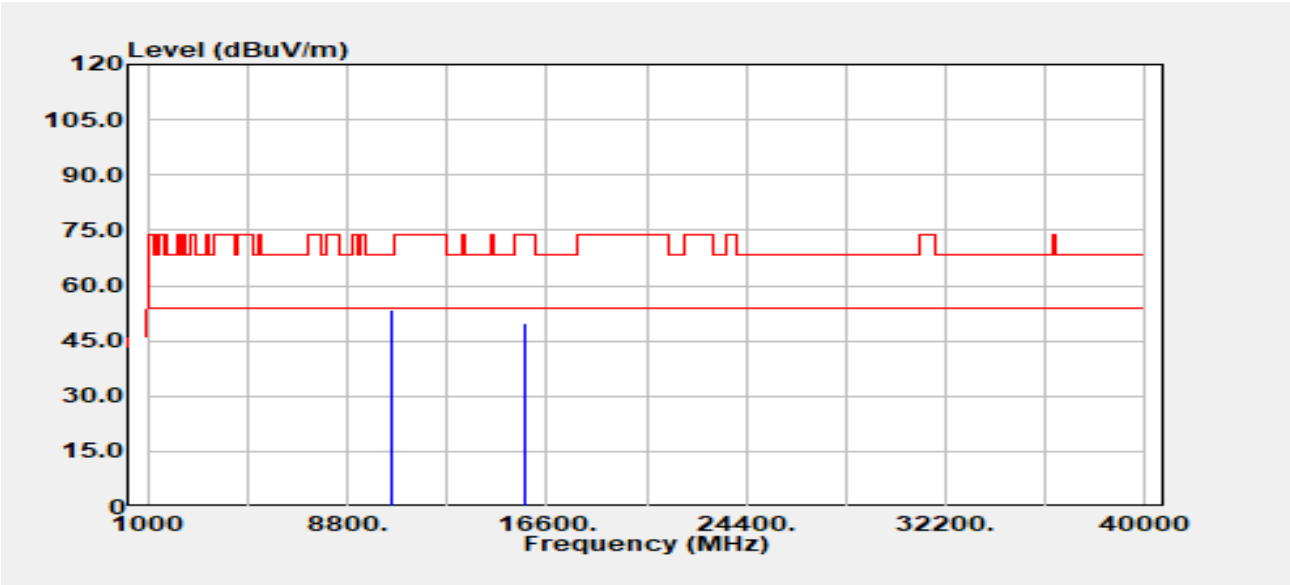


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	40.87	12.78	53.65	68.20	-14.55
15780.00	Peak	33.58	16.08	49.66	74.00	-24.34
15780.00	Average	27.66	16.08	43.74	54.00	-10.26



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 197 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

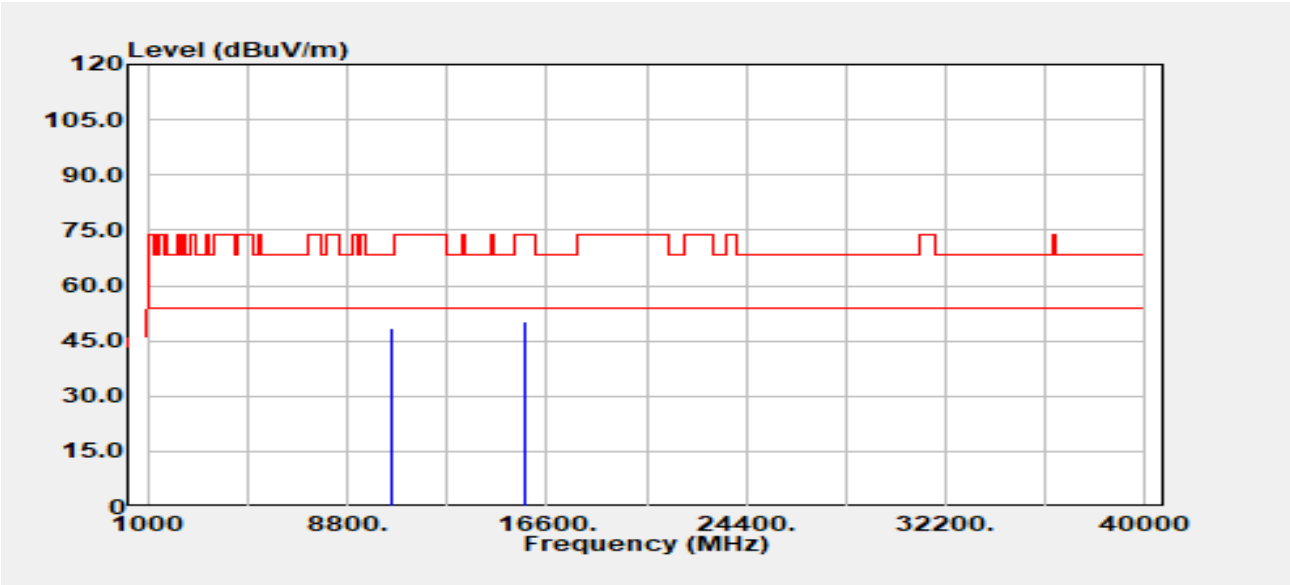


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	35.82	12.78	48.60	68.20	-19.60
15780.00	Peak	34.00	16.08	50.07	74.00	-23.93
15780.00	Average	27.61	16.08	43.69	54.00	-10.31



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 198 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5280 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

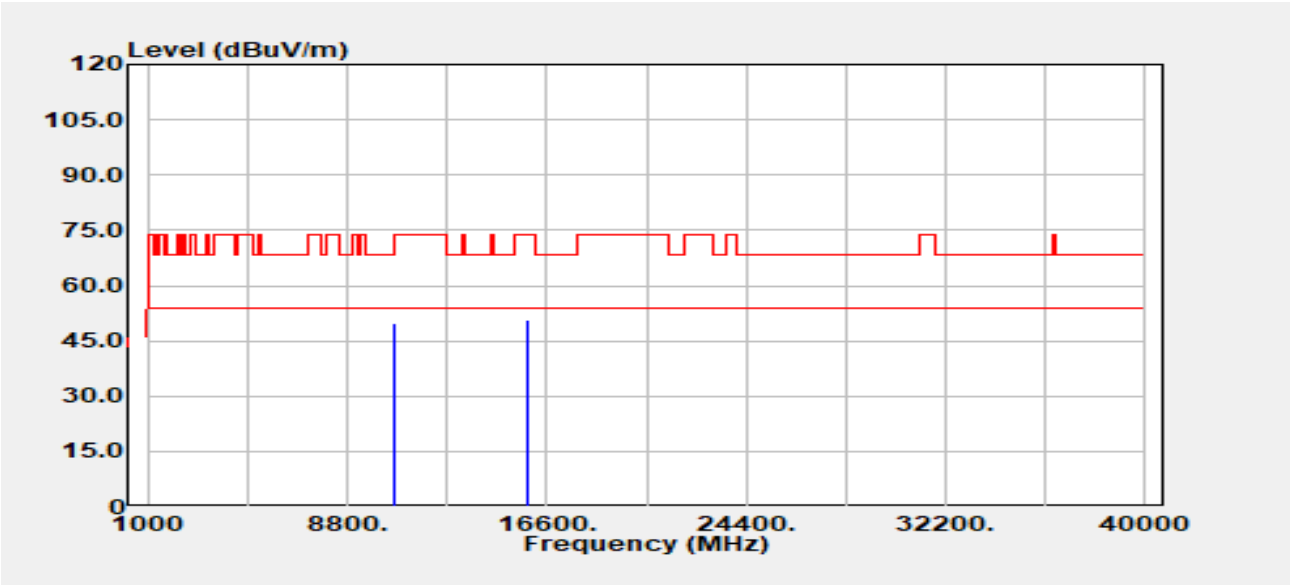


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10560.00	Peak	37.07	12.96	50.03	68.20	-18.17
15840.00	Peak	34.70	16.19	50.89	74.00	-23.11
15840.00	Average	27.39	16.19	43.58	54.00	-10.42



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 199 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5280 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

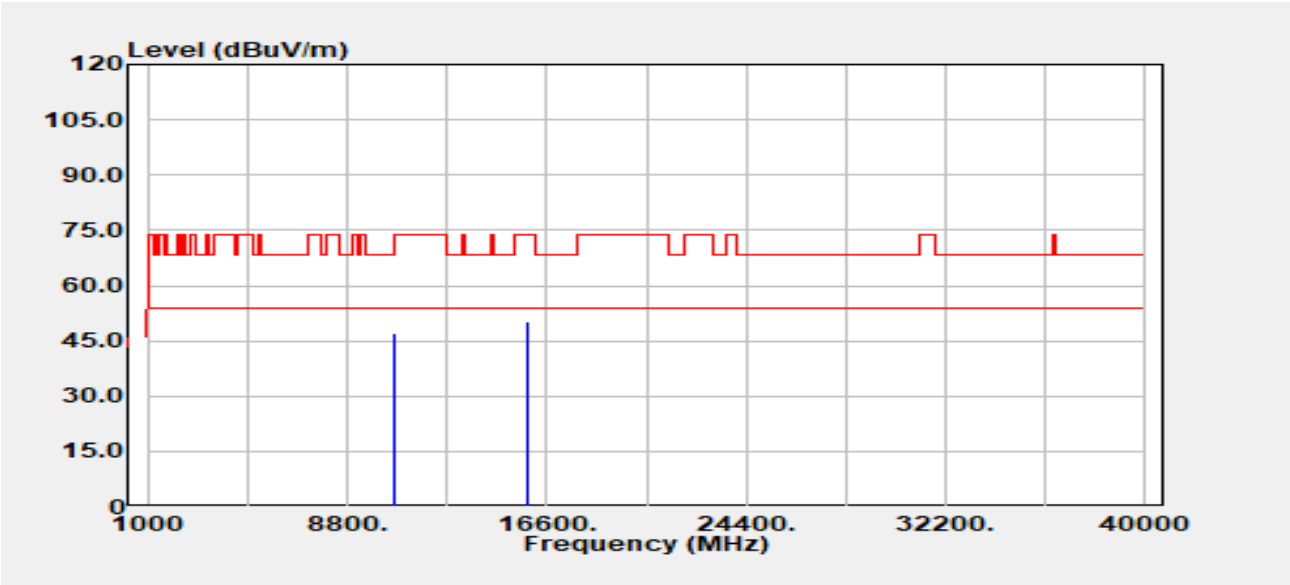


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10560.00	Peak	34.19	12.96	47.15	68.20	-21.05
15840.00	Peak	34.07	16.19	50.26	74.00	-23.74
15840.00	Average	27.48	16.19	43.67	54.00	-10.33



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 200 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band2	Temp./Humi.	:24.6/57
Frequency	:5320 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

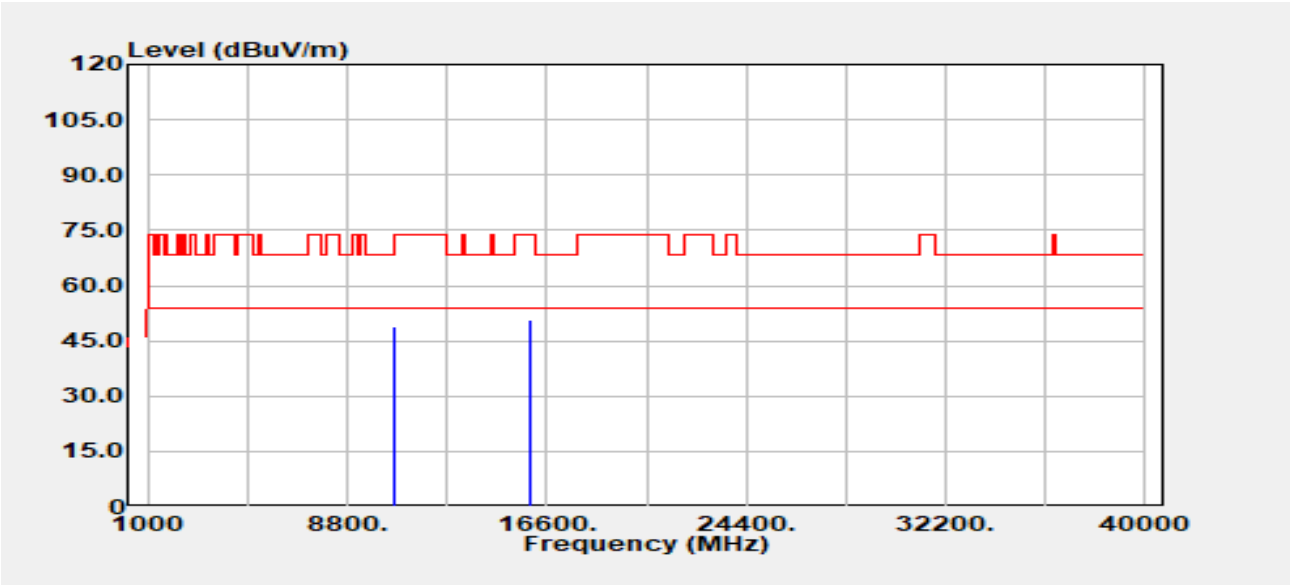


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	35.80	13.04	48.84	74.00	-25.16
10640.00	Average	30.89	13.04	43.93	54.00	-10.07
15960.00	Peak	33.23	17.41	50.63	74.00	-23.37
15960.00	Average	26.59	17.41	44.00	54.00	-10.00

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 201 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :11.5

Test Date :2024-09-04
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

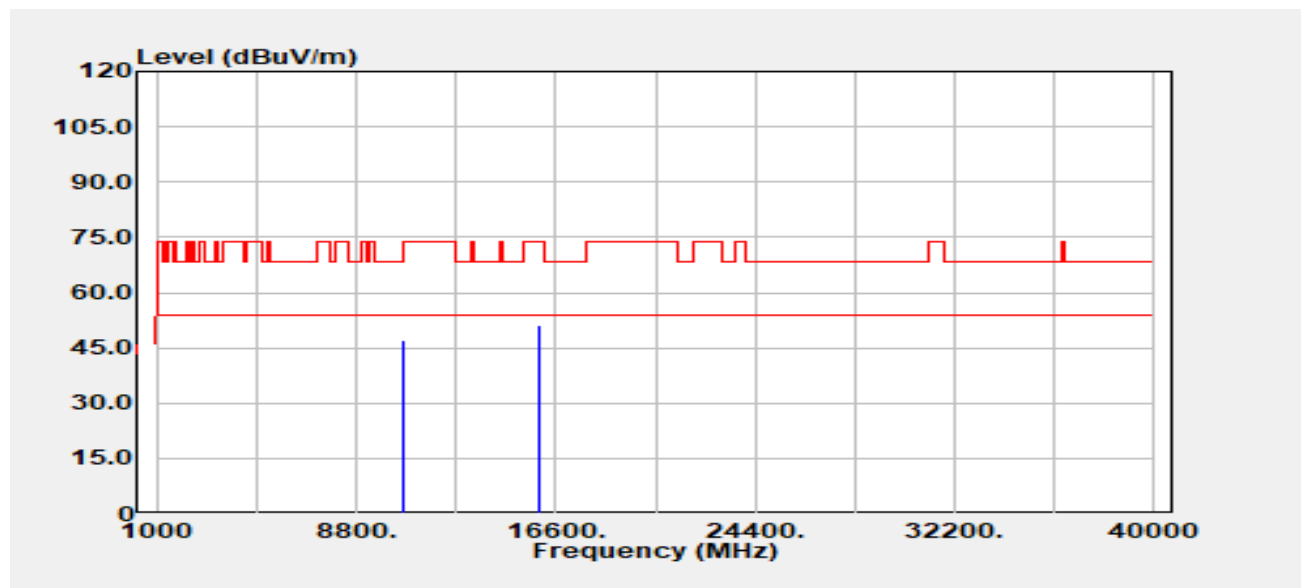


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	34.24	13.04	47.29	74.00	-26.71
10640.00	Average	28.26	13.04	41.31	54.00	-12.69
15960.00	Peak	33.64	17.41	51.05	74.00	-22.95
15960.00	Average	26.39	17.41	43.80	54.00	-10.20



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 202 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.6/57
Frequency	:5270 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

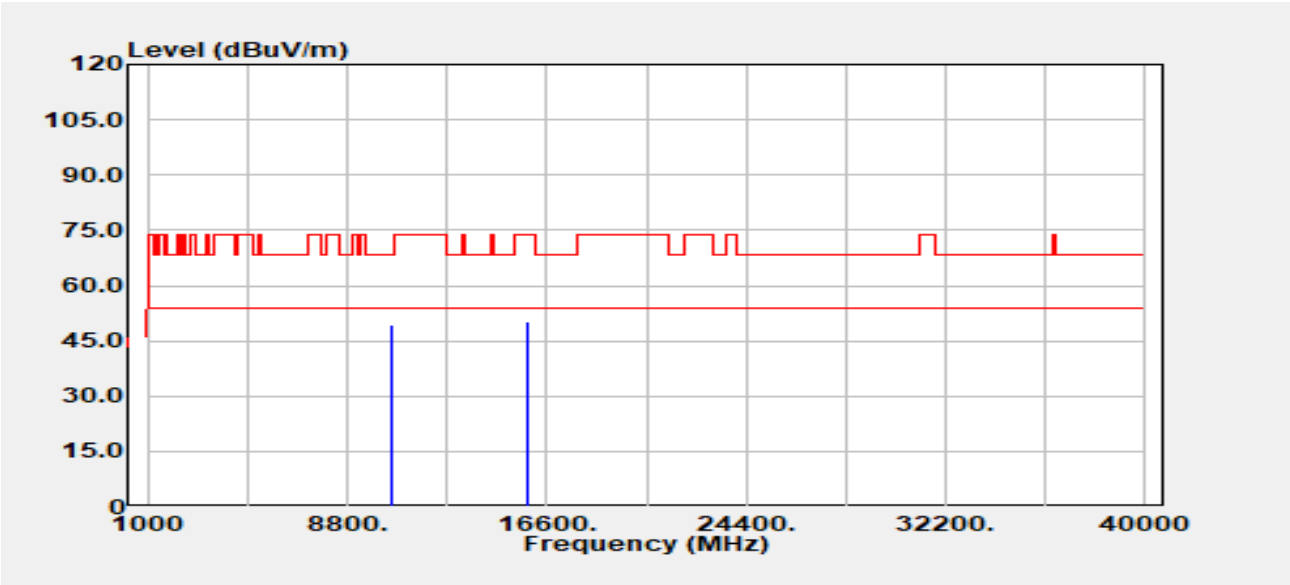


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.00	Peak	36.56	12.90	49.46	68.20	-18.74
15810.00	Peak	34.46	15.96	50.42	74.00	-23.58
15810.00	Average	26.25	15.96	42.21	54.00	-11.79



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 203 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.6/57
Frequency	:5270 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

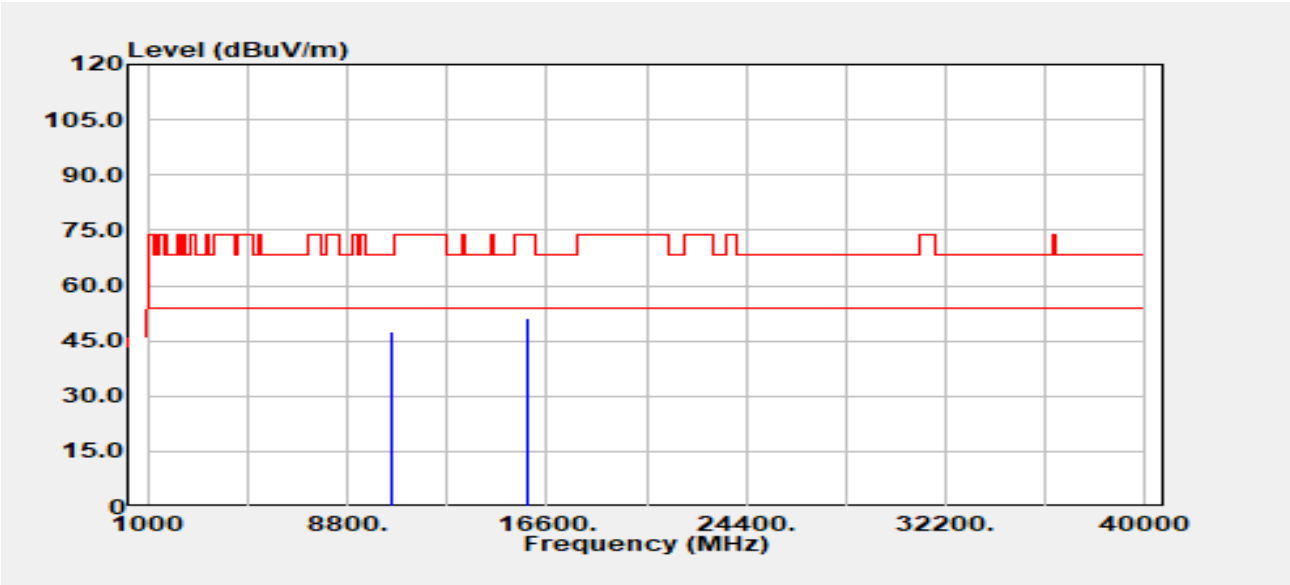


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.00	Peak	34.59	12.90	47.49	68.20	-20.71
15810.00	Peak	35.44	15.96	51.40	74.00	-22.60
15810.00	Average	26.05	15.96	42.00	54.00	-12.00



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 204 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.6/57
Frequency	:5310 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

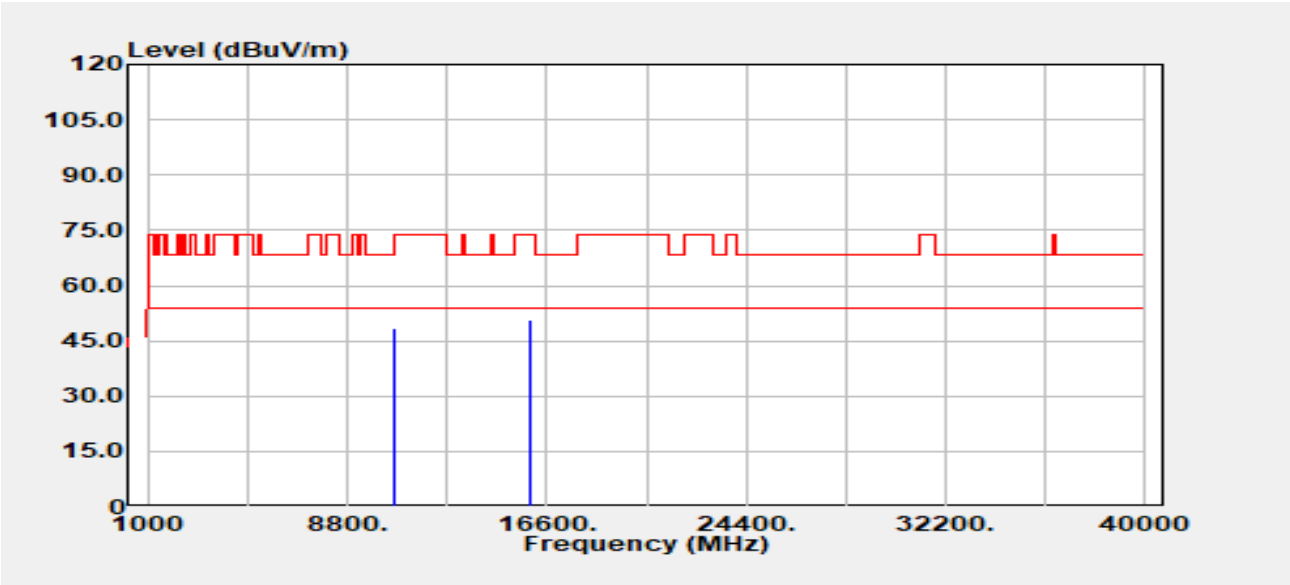


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.00	Peak	35.41	13.00	48.41	74.00	-25.59
10620.00	Average	27.98	13.00	40.98	54.00	-13.02
15930.00	Peak	33.86	16.94	50.80	74.00	-23.20
15930.00	Average	25.29	16.94	42.24	54.00	-11.76



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 205 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band2	Temp./Humi.	:24.6/57
Frequency	:5310 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

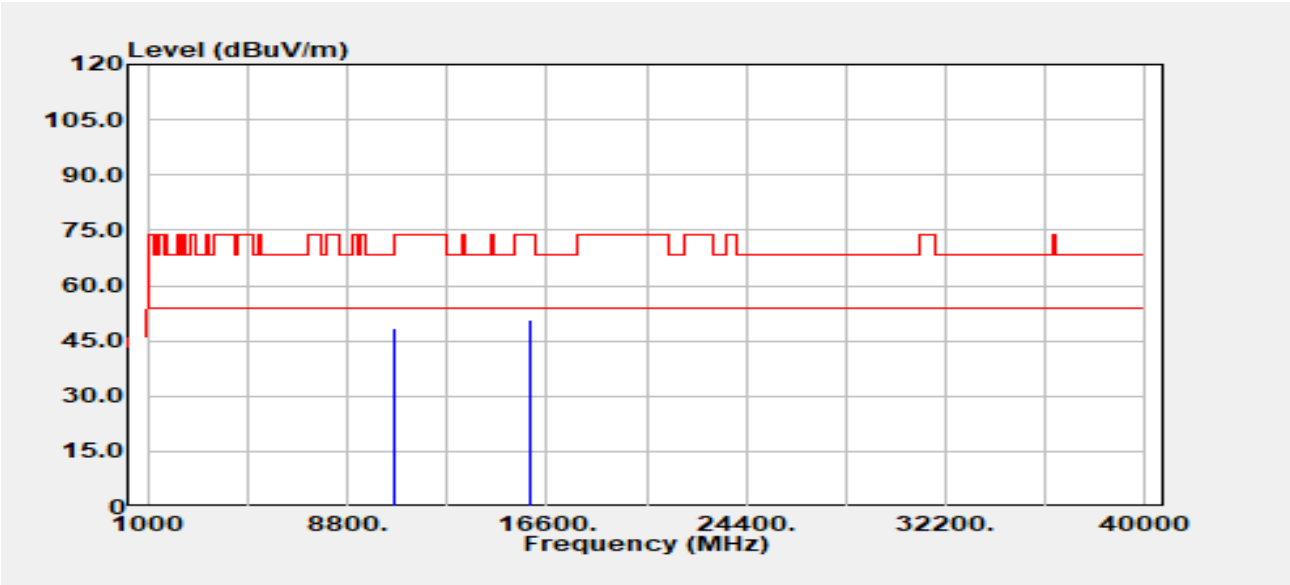


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.00	Peak	35.26	13.00	48.26	74.00	-25.74
10620.00	Average	26.79	13.00	39.79	54.00	-14.21
15930.00	Peak	33.97	16.94	50.91	74.00	-23.09
15930.00	Average	25.44	16.94	42.38	54.00	-11.62



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 206 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.6/57
Frequency	:5290 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

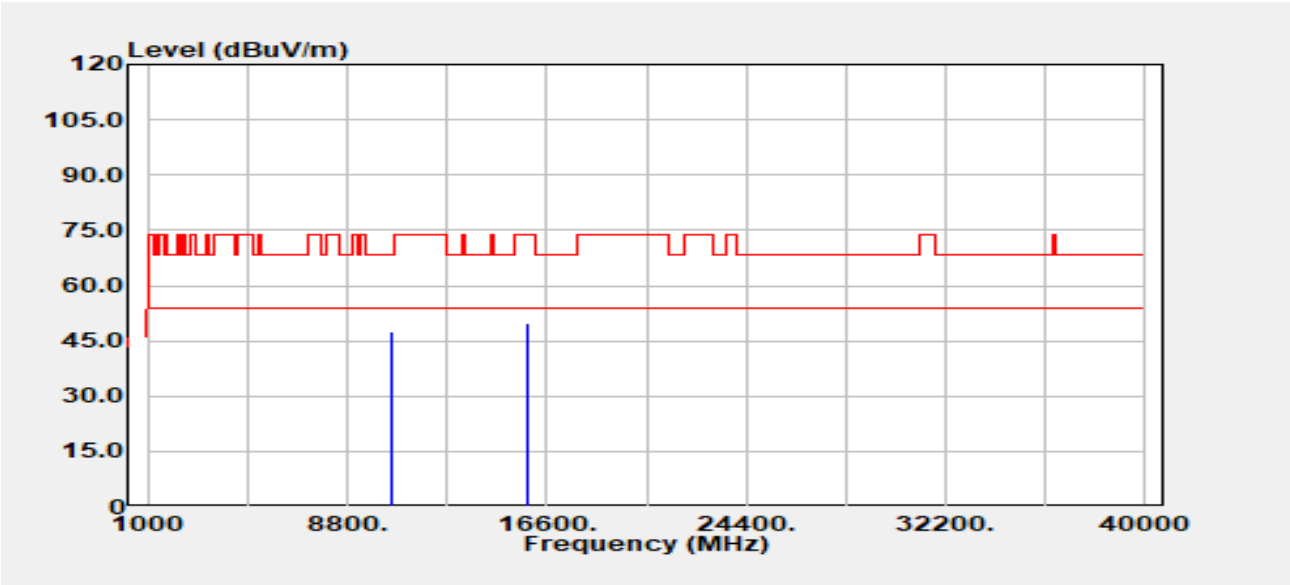


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10580.00	Peak	34.76	12.96	47.72	68.20	-20.48
15870.00	Peak	33.72	16.00	49.72	74.00	-24.28
15870.00	Average	26.15	16.00	42.15	54.00	-11.85



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 207 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11ac80/Band2	Temp./Humi.	:24.6/57
Frequency	:5290 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

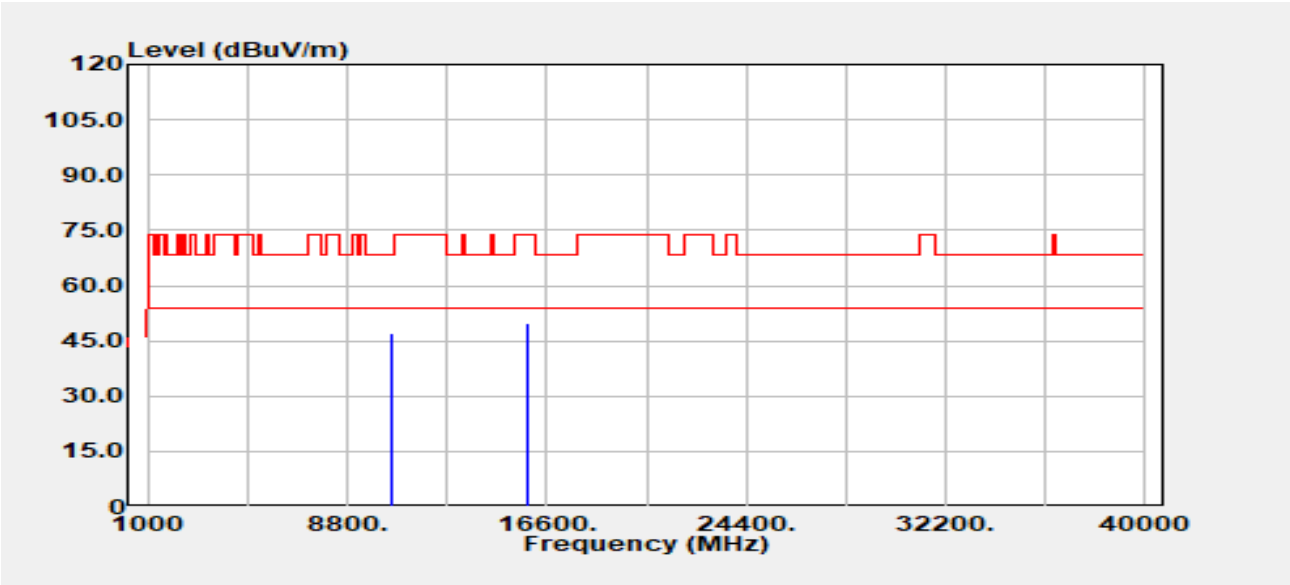


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.00	Peak	34.02	12.96	46.98	68.20	-21.22
15870.00	Peak	33.63	16.00	49.63	74.00	-24.37
15870.00	Average	26.27	16.00	42.28	54.00	-11.72



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 208 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-05
Operation Band	:802.11ax20/Band2	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

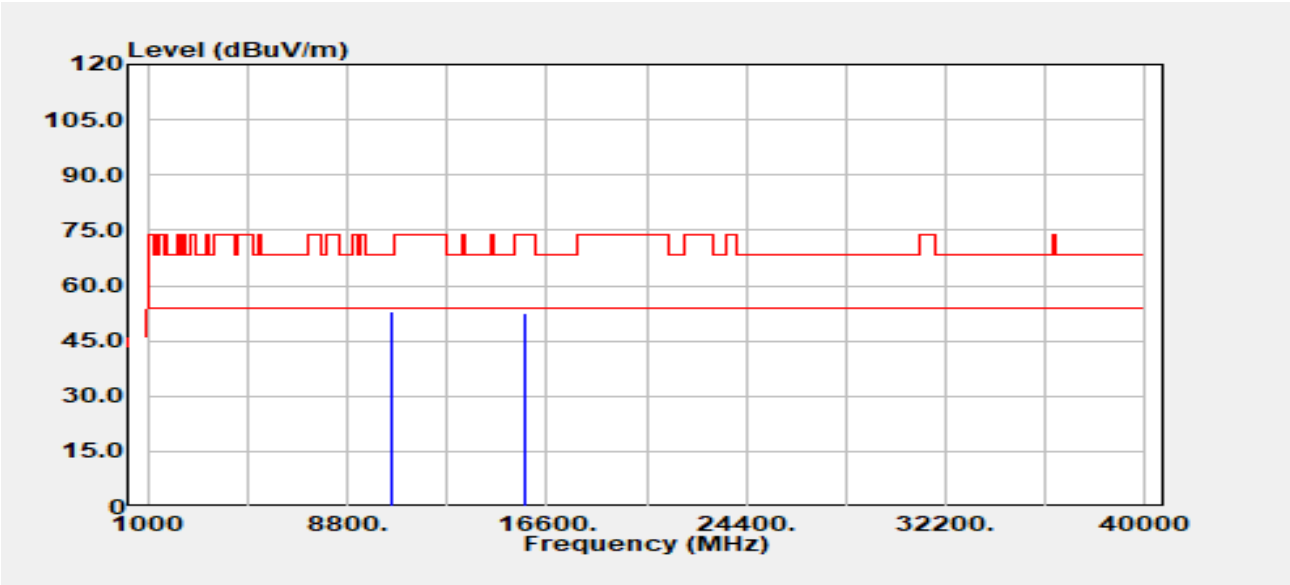


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	40.30	12.78	53.08	68.20	-15.12
15780.00	Peak	36.52	16.08	52.60	74.00	-21.40
15780.00	Average	29.45	16.08	45.52	54.00	-8.48



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 209 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-05
Operation Band	:802.11ax20/Band2	Temp./Humi.	:24.6/57
Frequency	:5260 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

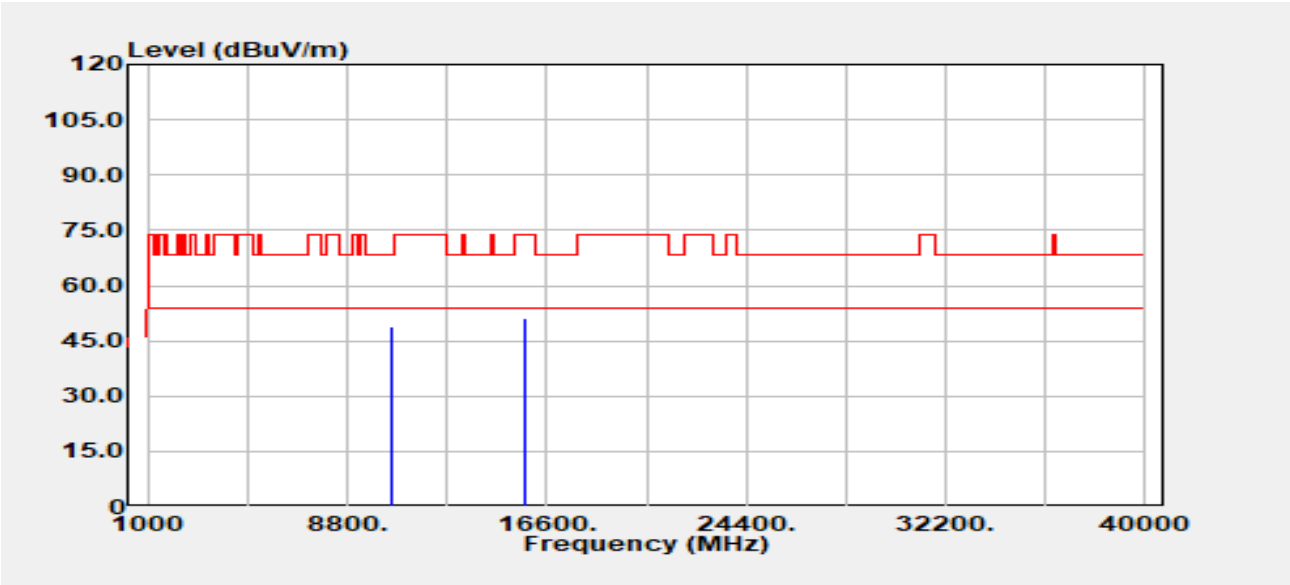


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10520.00	Peak	36.29	12.78	49.07	68.20	-19.13
15780.00	Peak	35.05	16.08	51.13	74.00	-22.87
15780.00	Average	28.20	16.08	44.27	54.00	-9.73



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 210 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-05
Operation Band	:802.11ax20/Band2	Temp./Humi.	:24.6/57
Frequency	:5280 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

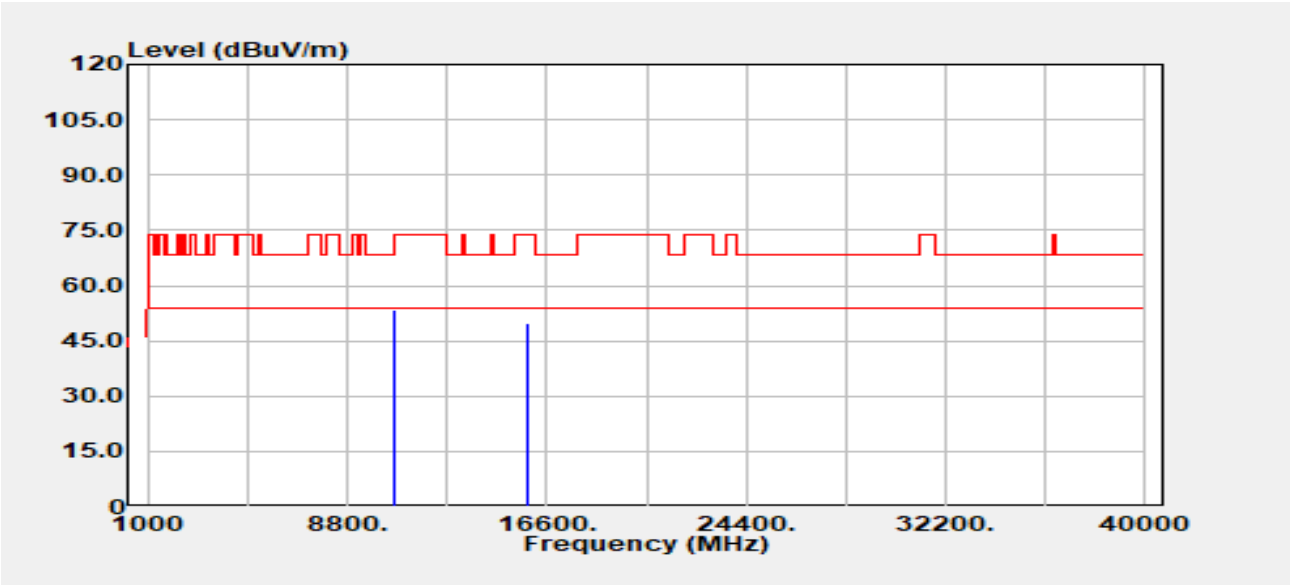


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10560.00	Peak	40.53	12.96	53.49	68.20	-14.71
15840.00	Peak	33.80	16.19	49.99	74.00	-24.01
15840.00	Average	28.23	16.19	44.42	54.00	-9.58



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 211 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-05
Operation Band	:802.11ax20/Band2	Temp./Humi.	:24.6/57
Frequency	:5280 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

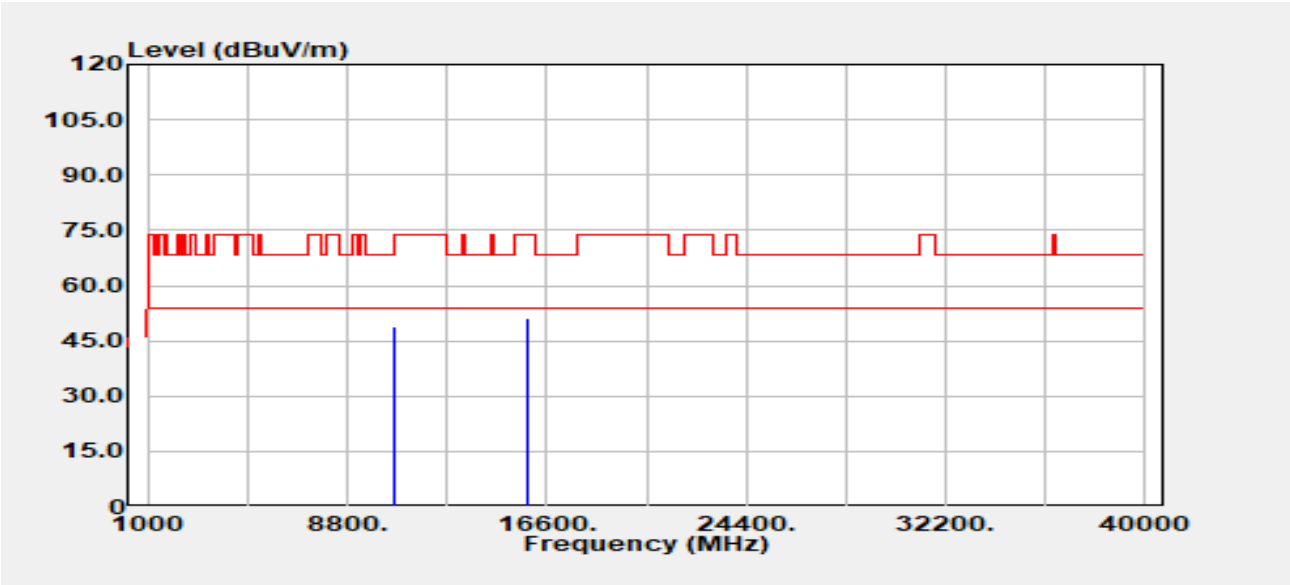


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10560.00	Peak	36.02	12.96	48.98	68.20	-19.22
15840.00	Peak	34.90	16.19	51.09	74.00	-22.91
15840.00	Average	28.01	16.19	44.20	54.00	-9.80

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 212 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :13

Test Date :2024-09-05
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray Li
Test Chamber : 966A

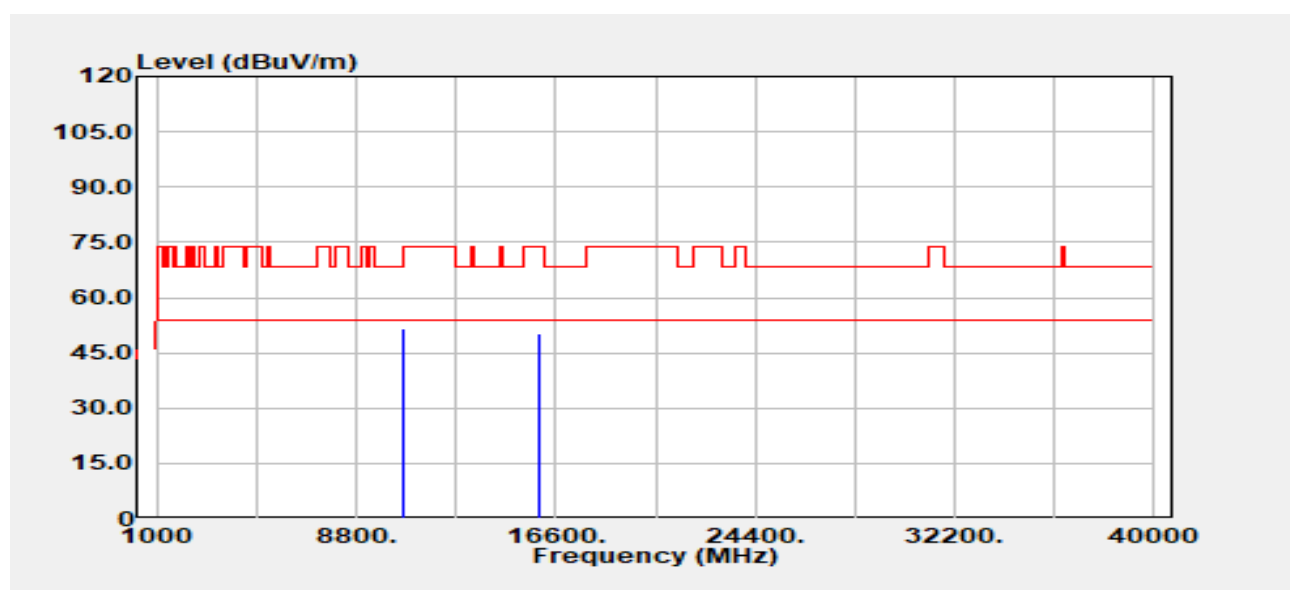


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	38.50	13.04	51.54	74.00	-22.46
10640.00	Average	34.39	13.04	47.44	54.00	-6.56
15960.00	Peak	32.94	17.41	50.35	74.00	-23.65
15960.00	Average	27.55	17.41	44.96	54.00	-9.04

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 213 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band2
Frequency :5320 MHz
Operation Mode :TX
EUT Pol :E2
Setting :13

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

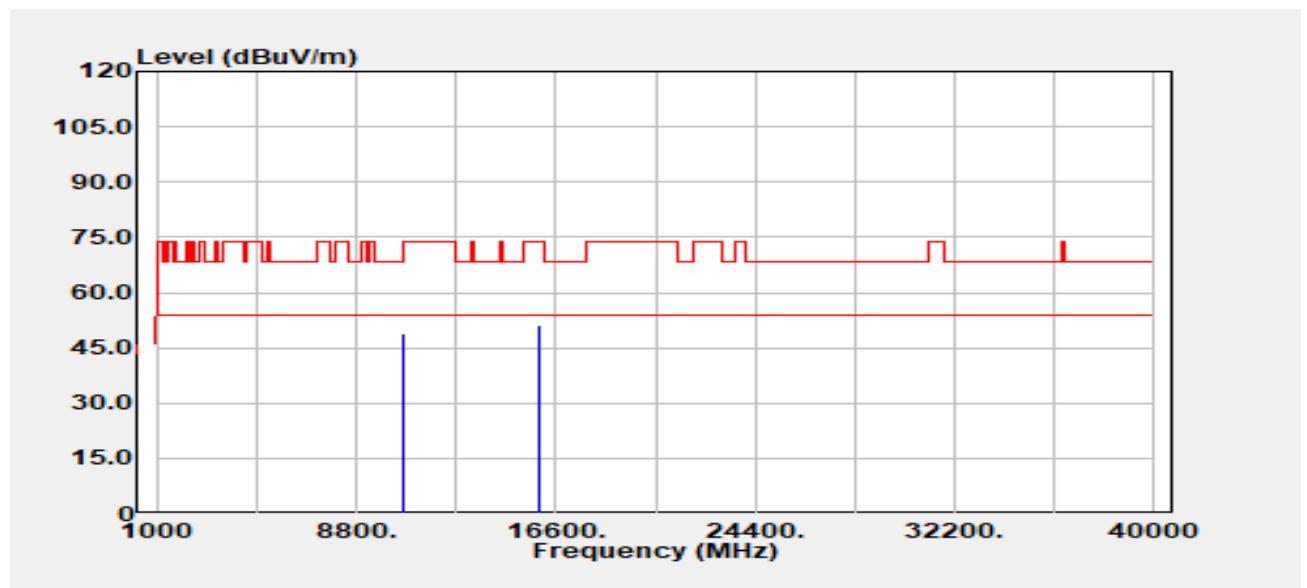


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10640.00	Peak	35.84	13.04	48.88	74.00	-25.12
10640.00	Average	29.61	13.04	42.65	54.00	-11.35
15960.00	Peak	33.66	17.41	51.07	74.00	-22.93
15960.00	Average	27.04	17.41	44.44	54.00	-9.56



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 214 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band2	Temp./Humi.	:24.6/57
Frequency	:5270 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

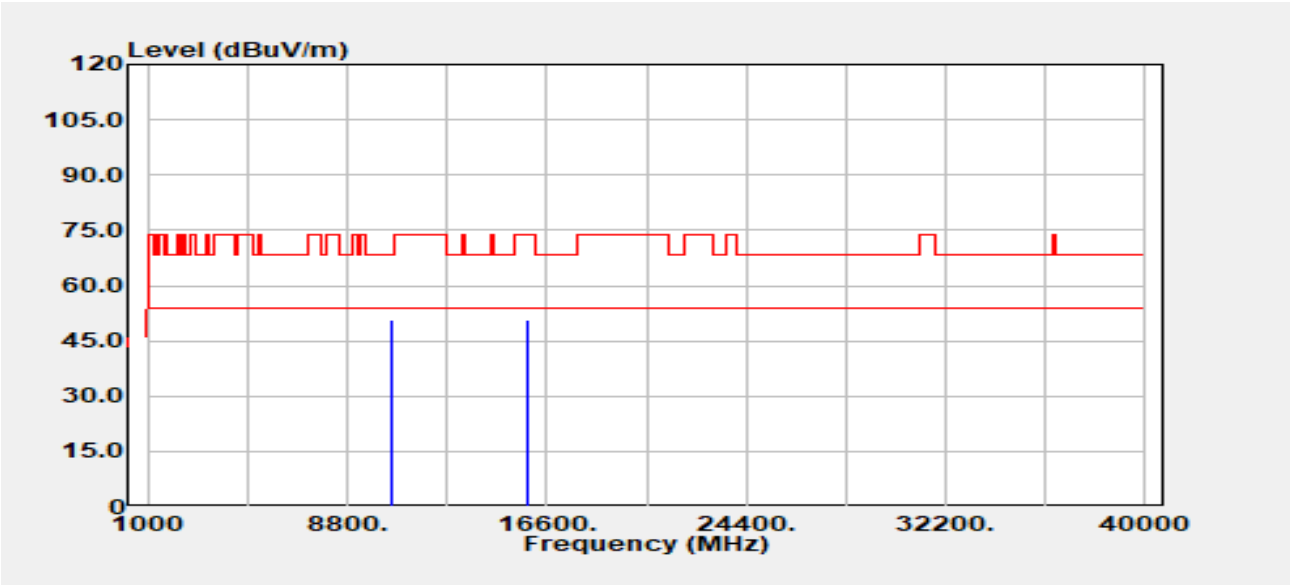


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.00	Peak	37.81	12.90	50.71	68.20	-17.49
15810.00	Peak	34.63	15.96	50.59	74.00	-23.41
15810.00	Average	26.59	15.96	42.54	54.00	-11.46



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 215 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band2	Temp./Humi.	:24.6/57
Frequency	:5270 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

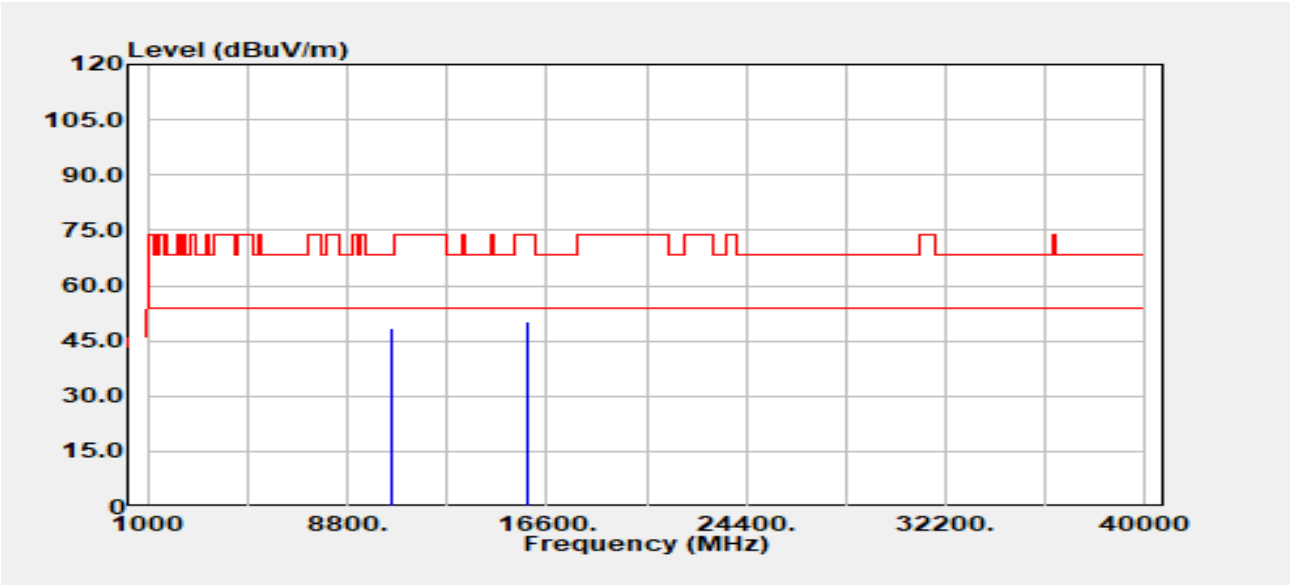


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10540.00	Peak	35.61	12.90	48.51	68.20	-19.69
15810.00	Peak	34.27	15.96	50.23	74.00	-23.77
15810.00	Average	26.24	15.96	42.20	54.00	-11.80



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 216 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band2	Temp./Humi.	:24.6/57
Frequency	:5310 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

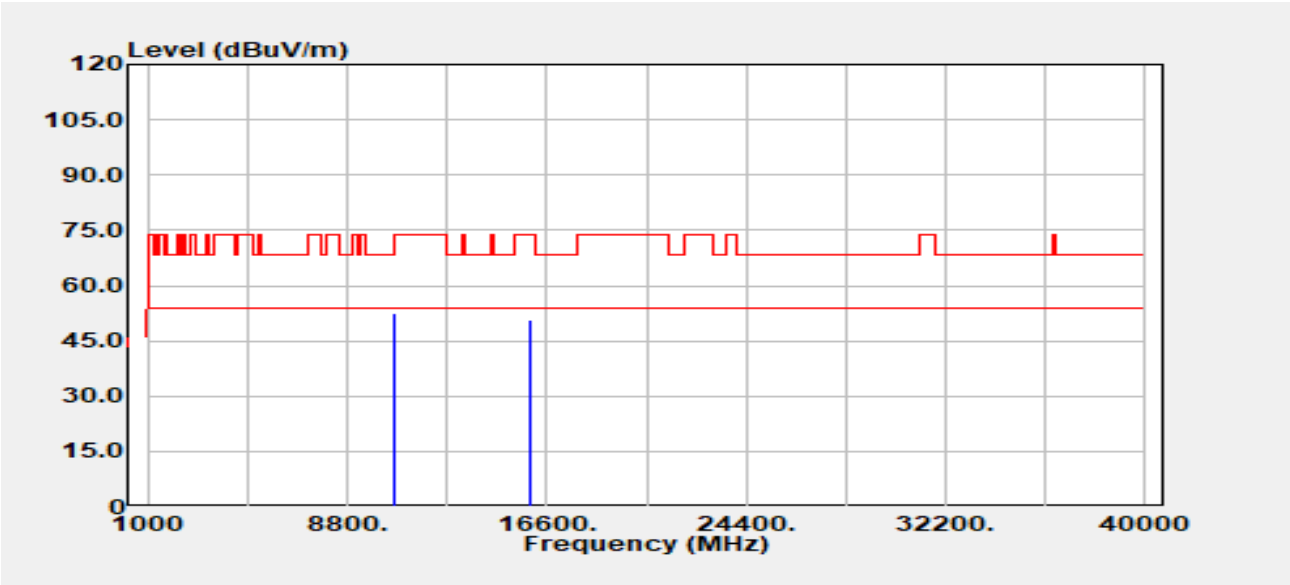


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.00	Peak	39.33	13.00	52.33	74.00	-21.67
10620.00	Average	30.84	13.00	43.84	54.00	-10.16
15930.00	Peak	33.82	16.94	50.76	74.00	-23.24
15930.00	Average	25.62	16.94	42.56	54.00	-11.44



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 217 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band2	Temp./Humi.	:24.6/57
Frequency	:5310 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

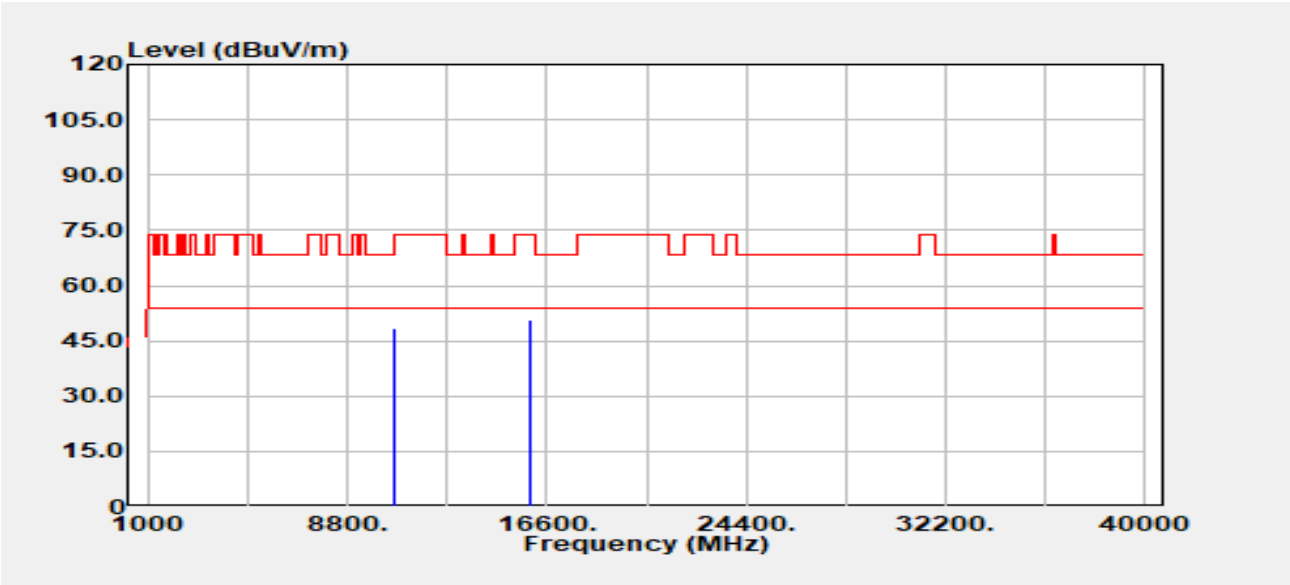


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10620.00	Peak	35.25	13.00	48.25	74.00	-25.75
10620.00	Average	27.64	13.00	40.64	54.00	-13.36
15930.00	Peak	33.90	16.94	50.85	74.00	-23.15
15930.00	Average	25.14	16.94	42.09	54.00	-11.91



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 218 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax80/Band2	Temp./Humi.	:24.6/57
Frequency	:5290 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

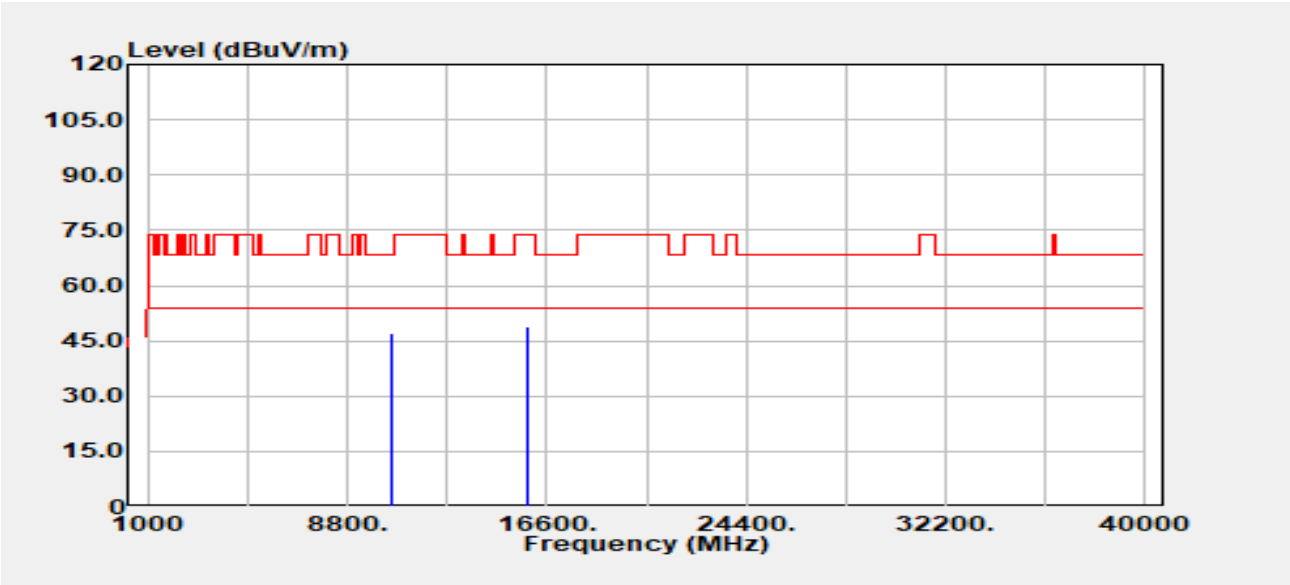


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10580.00	Peak	34.08	12.96	47.04	68.20	-21.16
15870.00	Peak	32.97	16.00	48.97	74.00	-25.03
15870.00	Average	26.26	16.00	42.26	54.00	-11.74



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 219 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax80/Band2	Temp./Humi.	:24.6/57
Frequency	:5290 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

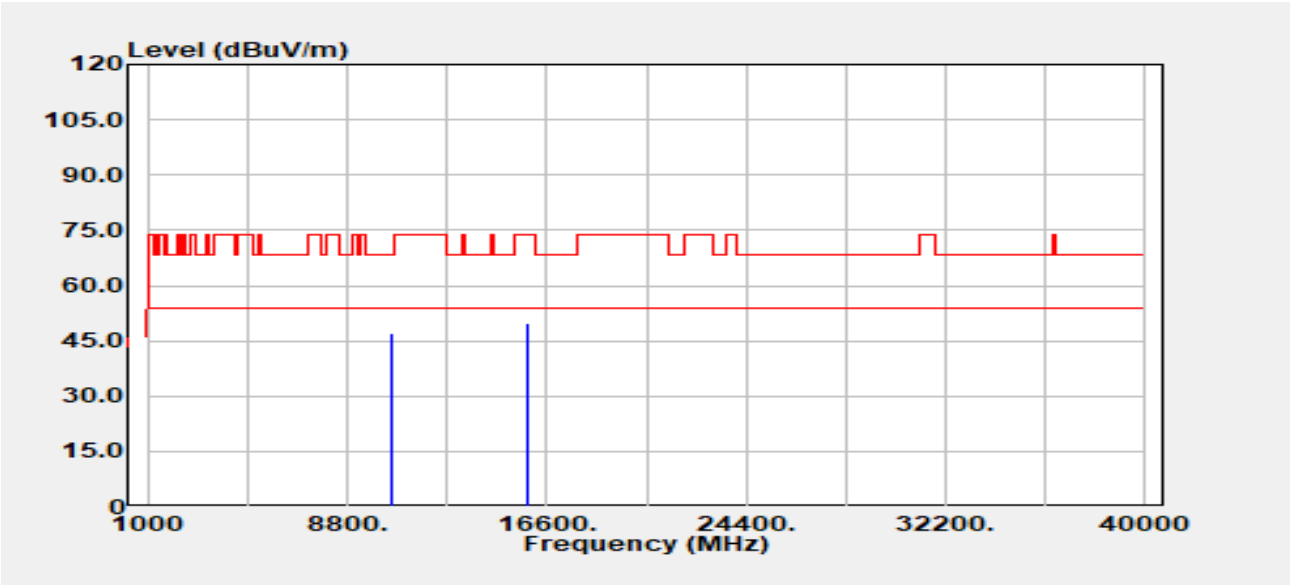


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10580.00	Peak	34.19	12.96	47.15	68.20	-21.05
15870.00	Peak	33.79	16.00	49.79	74.00	-24.21
15870.00	Average	26.24	16.00	42.24	54.00	-11.76

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 220 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-09-05
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

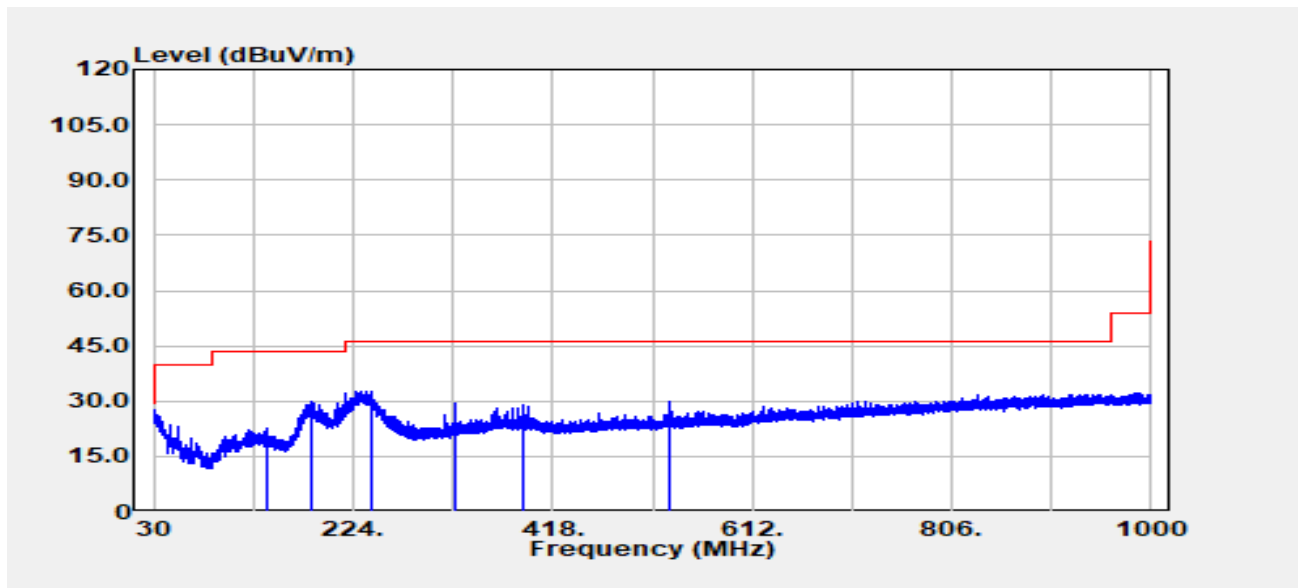


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
140.00	Peak	33.26	-10.67	22.59	43.50	-20.91
182.20	Peak	42.02	-12.19	29.83	43.50	-13.67
240.90	Peak	44.14	-11.40	32.74	46.00	-13.26
322.10	Peak	38.46	-8.94	29.52	46.00	-16.48
389.30	Peak	36.34	-7.23	29.11	46.00	-16.89
532.00	Peak	33.98	-3.91	30.07	46.00	-15.93

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 221 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-09-05
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

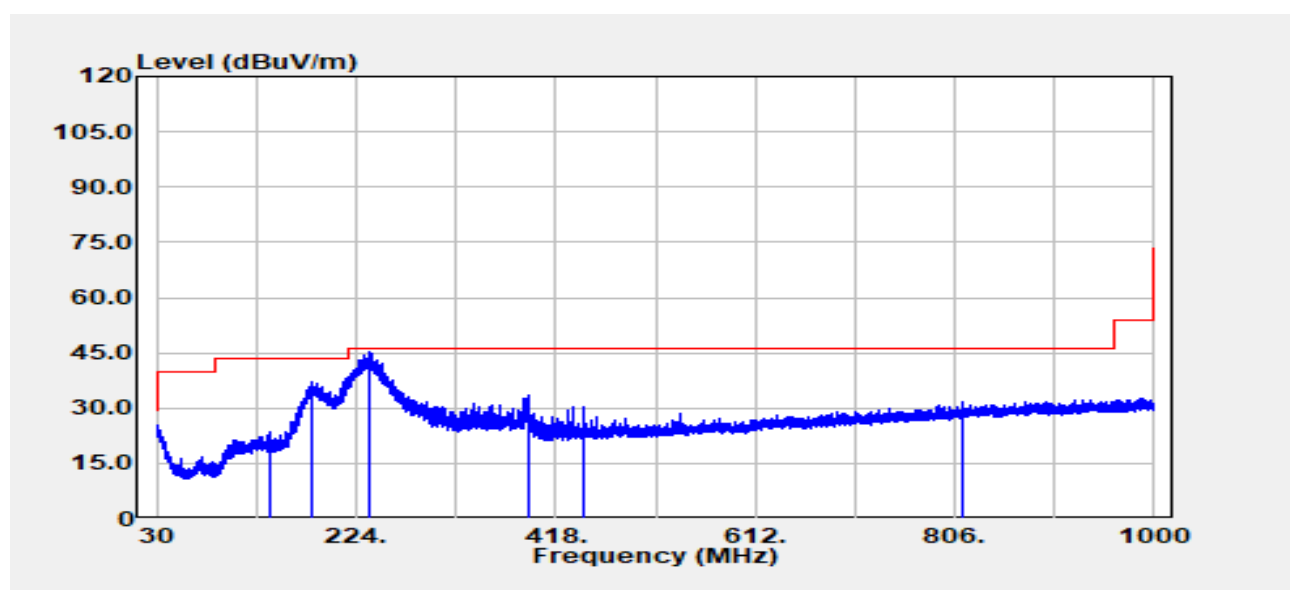


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
140.40	Peak	34.33	-10.67	23.67	43.50	-19.83
181.50	Peak	49.24	-12.24	37.00	43.50	-6.50
236.30	QP	52.99	-11.65	41.34	46.00	-4.66
390.50	Peak	40.73	-7.18	33.56	46.00	-12.45
445.30	Peak	35.91	-5.39	30.52	46.00	-15.48
812.60	Peak	31.04	0.76	31.81	46.00	-14.19



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 222 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band3_CH0	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

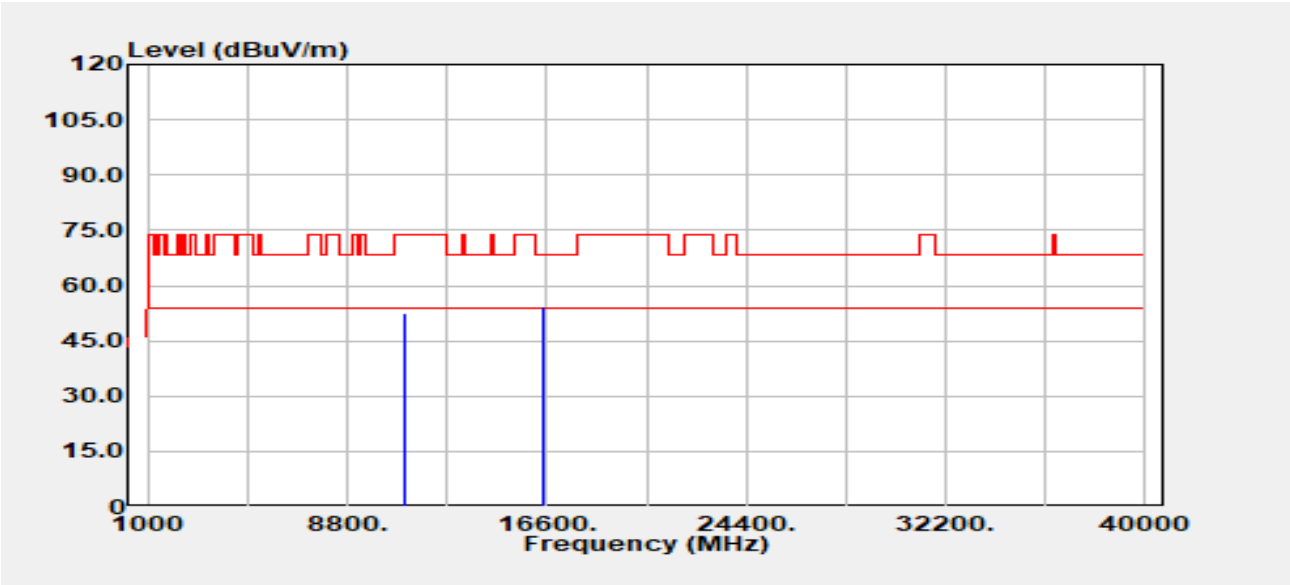


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	38.80	13.59	52.39	74.00	-21.61
11000.00	Average	33.62	13.59	47.21	54.00	-6.79
16500.00	Peak	33.21	21.16	54.37	68.20	-13.83



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 223 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band3_CH0	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

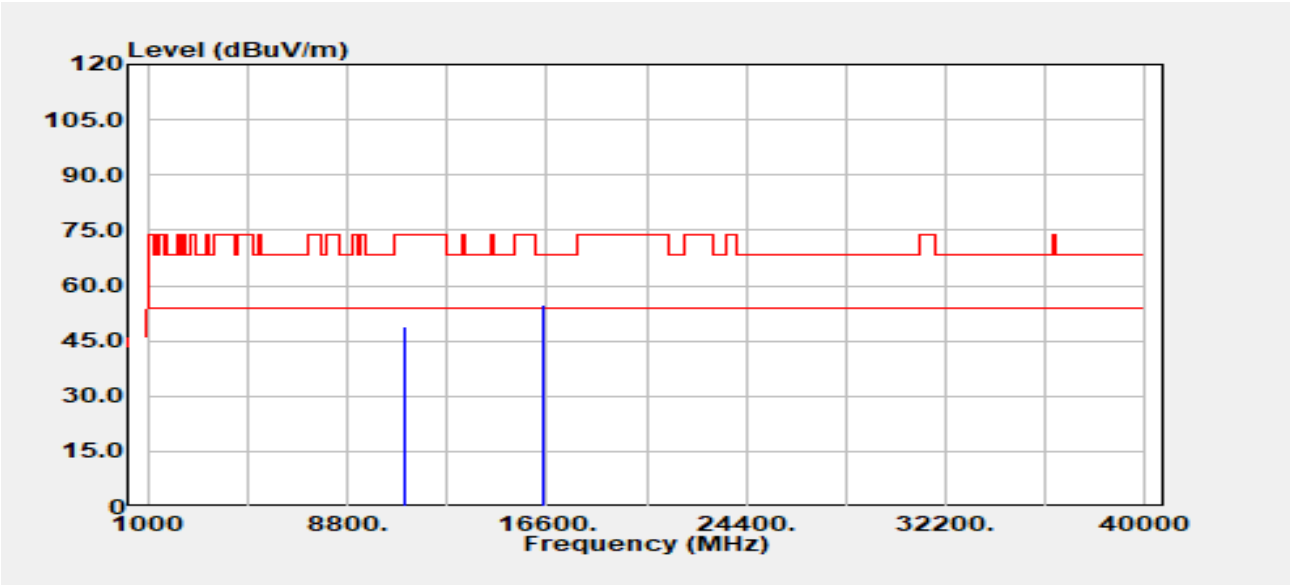


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	35.20	13.59	48.79	74.00	-25.21
11000.00	Average	29.69	13.59	43.28	54.00	-10.72
16500.00	Peak	33.81	21.16	54.97	68.20	-13.23



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 224 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band3_CH0	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

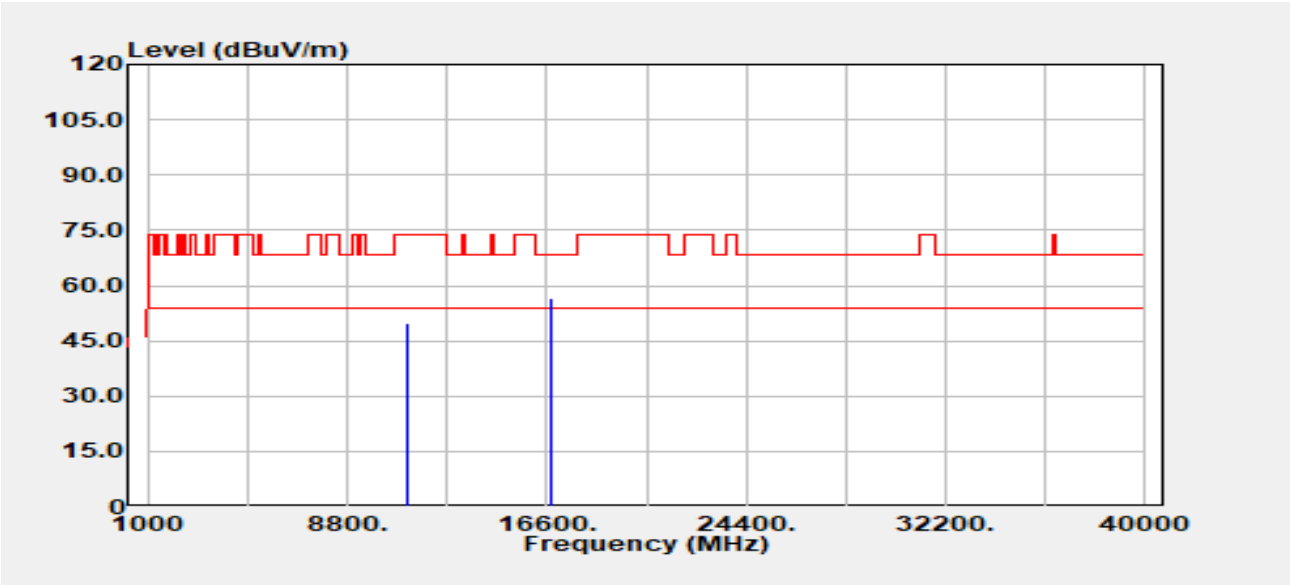


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	36.24	13.61	49.85	74.00	-24.15
11160.00	Average	32.17	13.61	45.79	54.00	-8.21
16740.00	Peak	33.85	22.60	56.46	68.20	-11.74



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 225 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band3_CH0	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

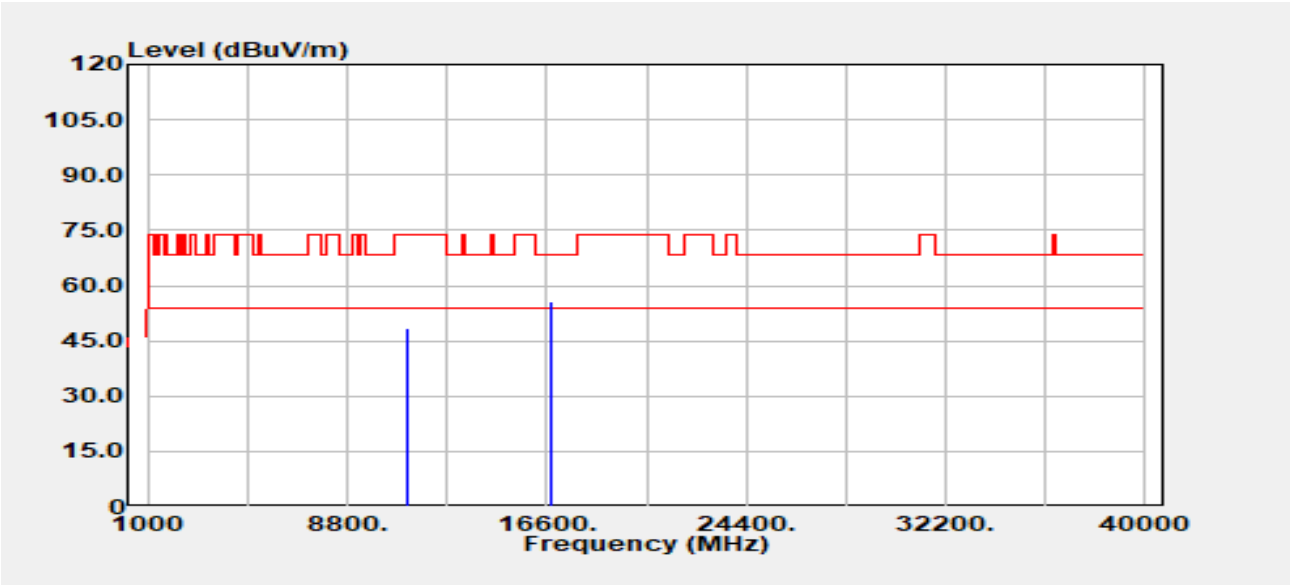


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	34.65	13.61	48.26	74.00	-25.74
11160.00	Average	30.08	13.61	43.69	54.00	-10.31
16740.00	Peak	33.01	22.60	55.62	68.20	-12.58



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 226 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band3_CH0	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

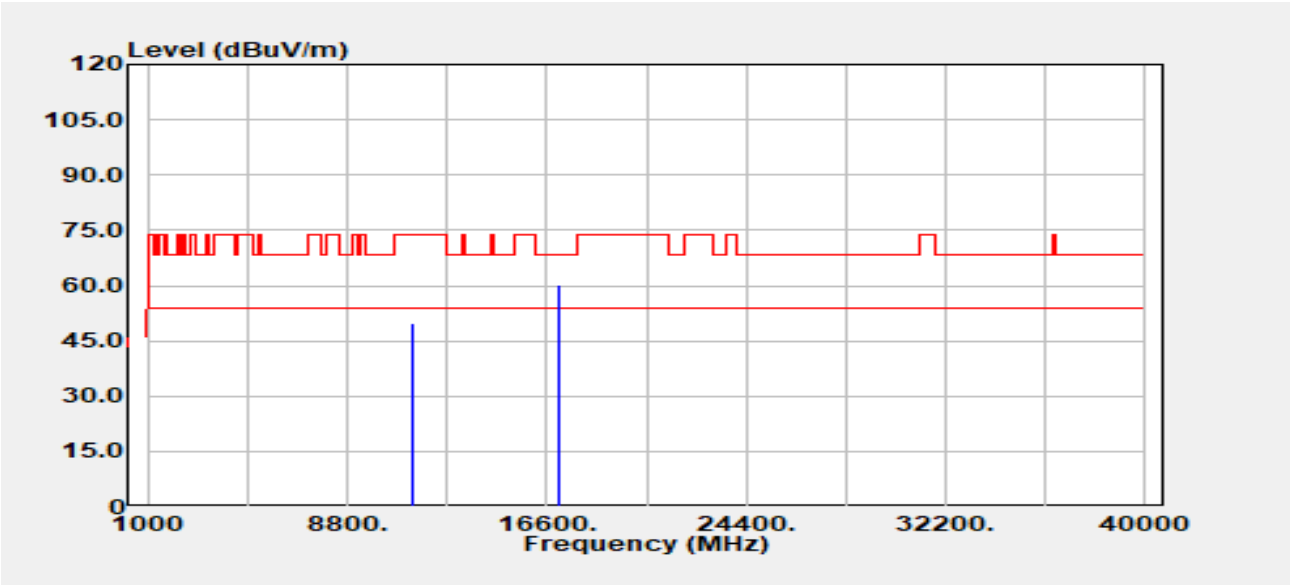


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	36.02	13.81	49.83	74.00	-24.17
11400.00	Average	33.09	13.81	46.90	54.00	-7.10
17100.00	Peak	32.46	27.61	60.07	68.20	-8.13

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 227 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band3_CH0
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

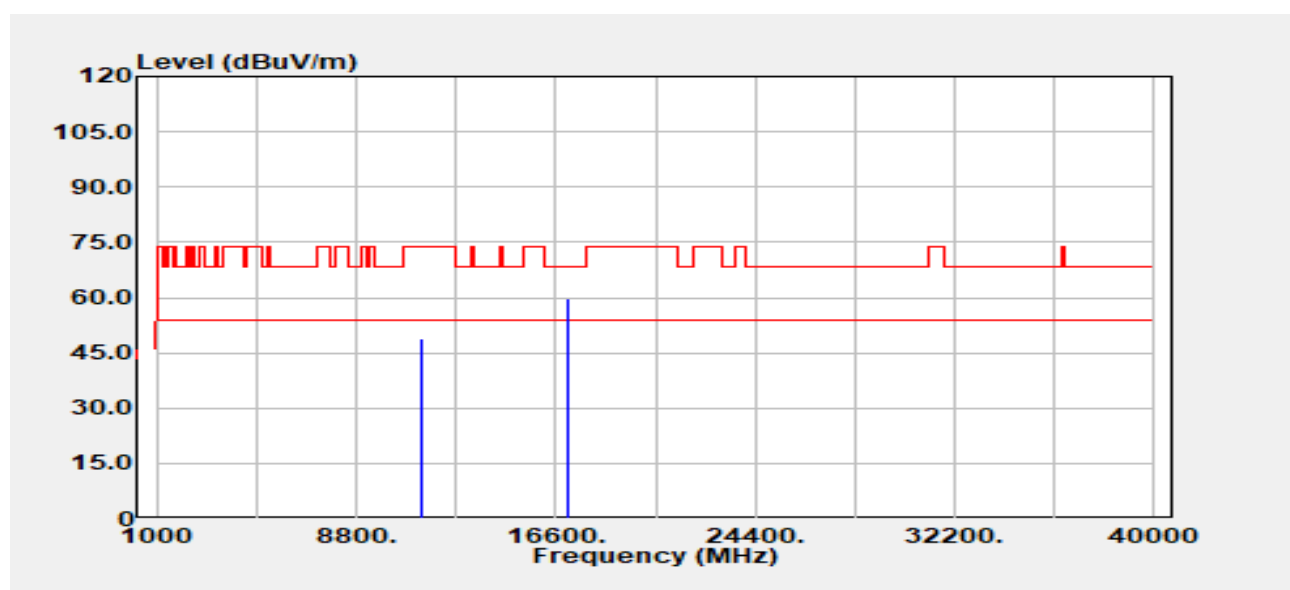


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	35.03	13.81	48.84	74.00	-25.16
11400.00	Average	29.45	13.81	43.26	54.00	-10.74
17100.00	Peak	32.20	27.61	59.81	68.20	-8.39



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 228 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band3_CH1	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

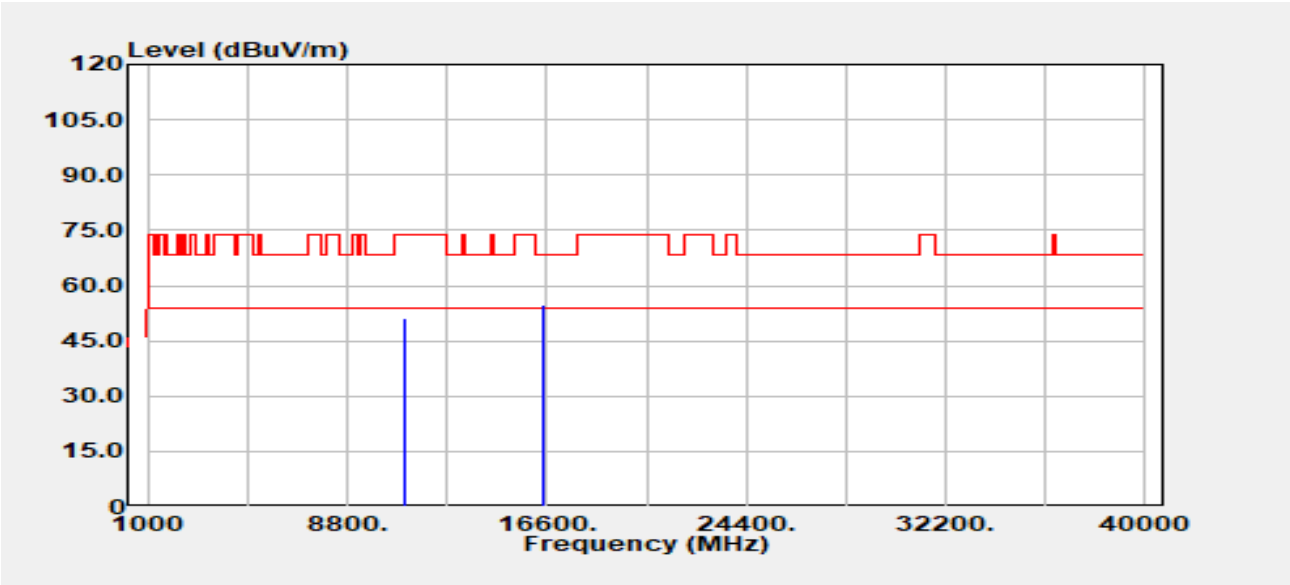


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	37.36	13.59	50.95	74.00	-23.05
11000.00	Average	34.50	13.59	48.09	54.00	-5.91
16500.00	Peak	33.81	21.16	54.97	68.20	-13.23



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 229 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band3_CH1	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

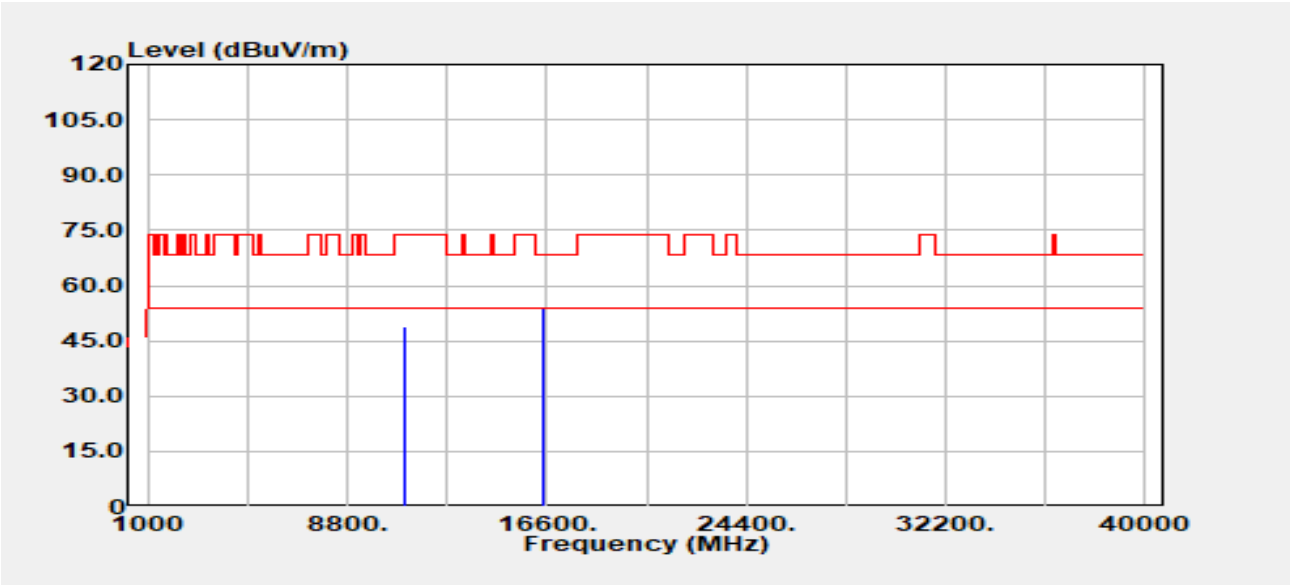


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	35.20	13.59	48.79	74.00	-25.21
11000.00	Average	30.64	13.59	44.23	54.00	-9.77
16500.00	Peak	32.77	21.16	53.93	68.20	-14.27



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 230 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band3_CH1	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

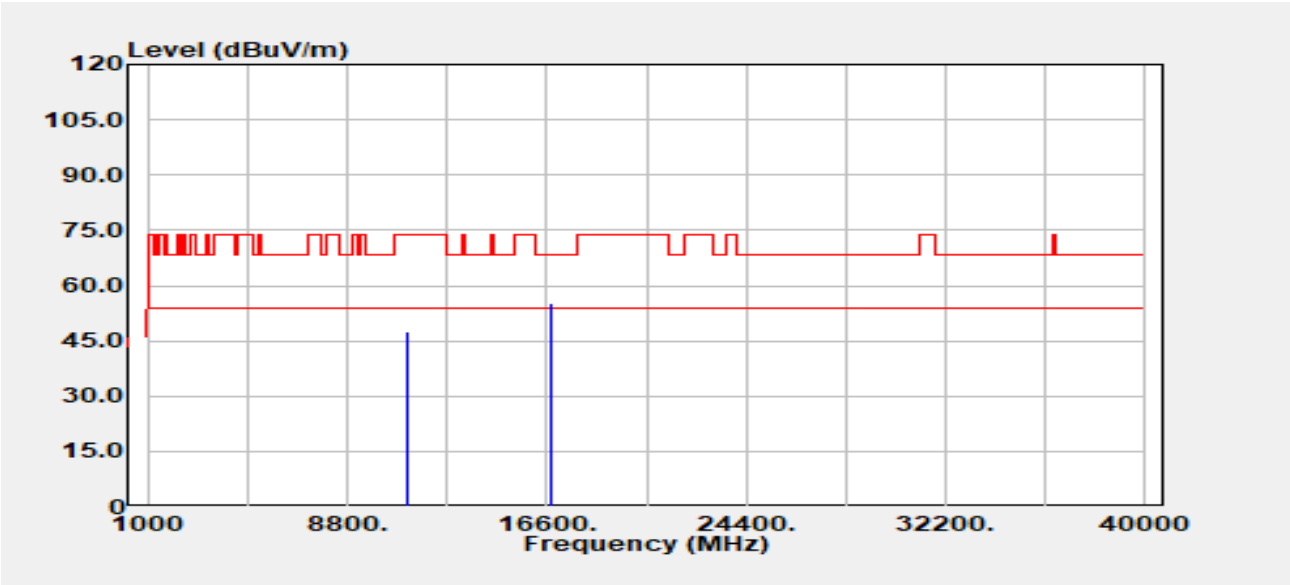


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	34.10	13.61	47.71	74.00	-26.29
11160.00	Average	29.19	13.61	42.80	54.00	-11.20
16740.00	Peak	32.43	22.60	55.03	68.20	-13.17



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 231 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band3_CH1	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

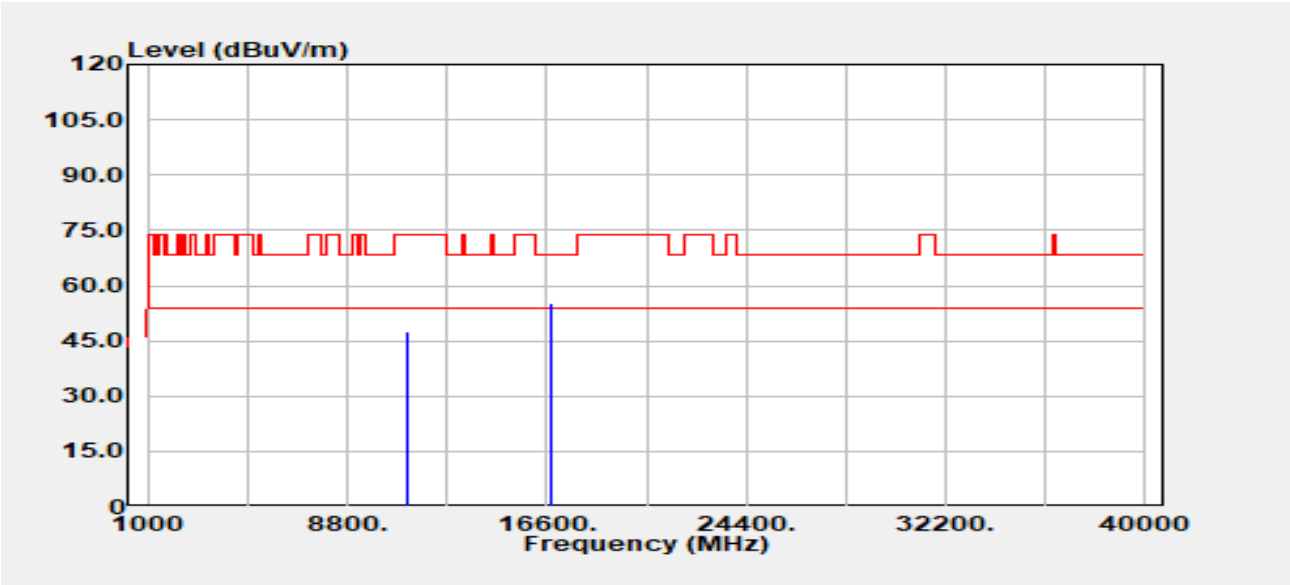


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	33.99	13.61	47.61	74.00	-26.39
11160.00	Average	28.51	13.61	42.12	54.00	-11.88
16740.00	Peak	32.82	22.60	55.42	68.20	-12.78



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 232 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band3_CH1	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

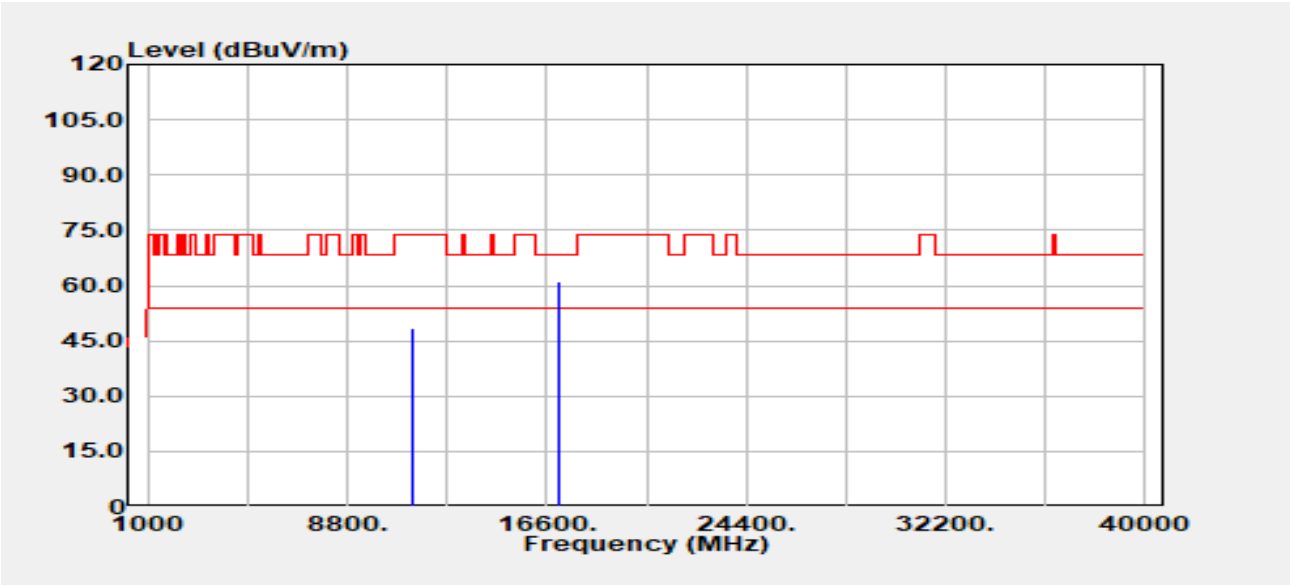


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	34.55	13.81	48.36	74.00	-25.64
11400.00	Average	28.38	13.81	42.19	54.00	-11.81
17100.00	Peak	33.43	27.61	61.04	68.20	-7.16

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 233 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band3_CH1	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

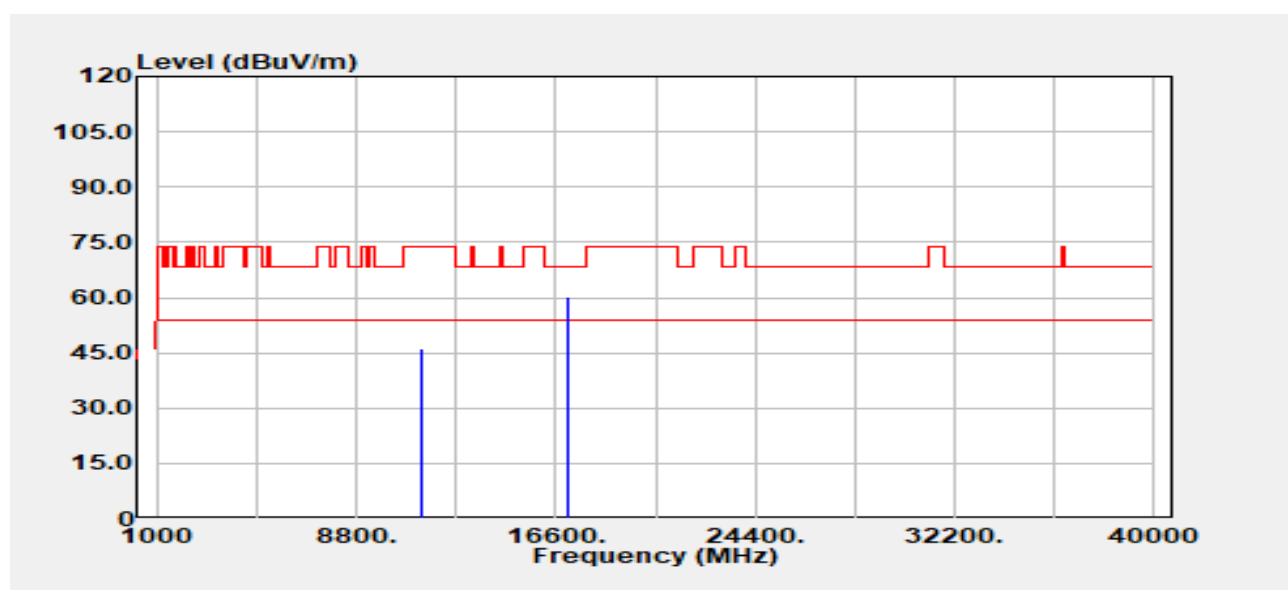


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	32.25	13.81	46.06	74.00	-27.94
11400.00	Average	27.43	13.81	41.24	54.00	-12.76
17100.00	Peak	32.49	27.61	60.10	68.20	-8.10



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 234 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

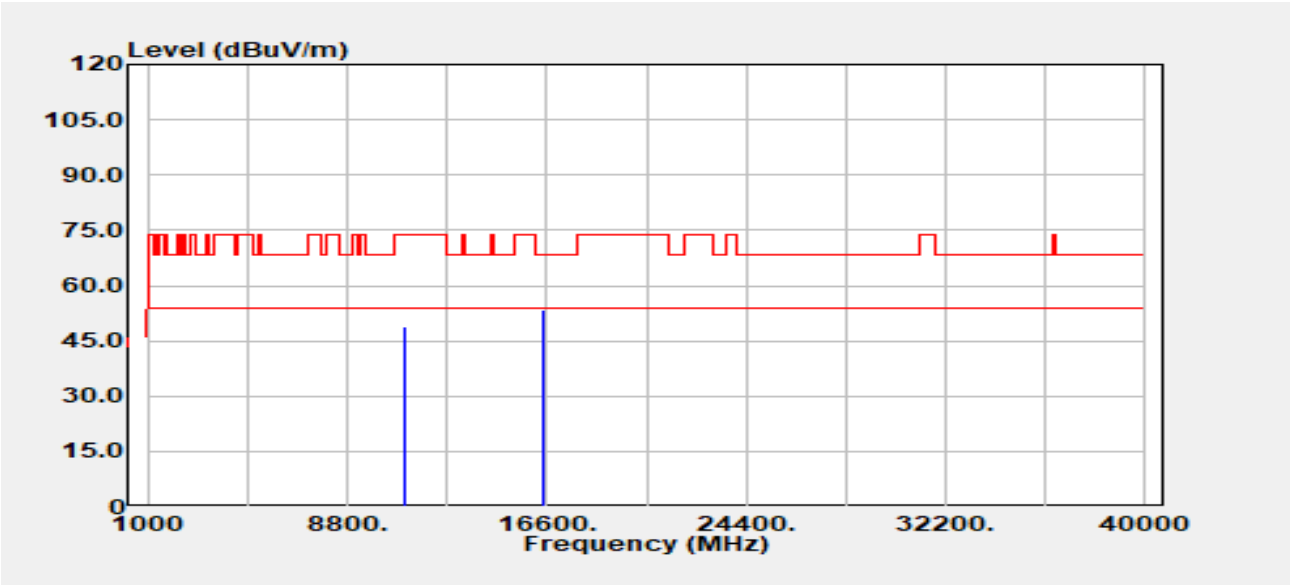


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	35.21	13.59	48.80	74.00	-25.20
11000.00	Average	32.33	13.59	45.92	54.00	-8.08
16500.00	Peak	32.16	21.16	53.32	68.20	-14.88

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 235 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :TX
EUT Pol :E2
Setting :11.5

Test Date :2024-09-04
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

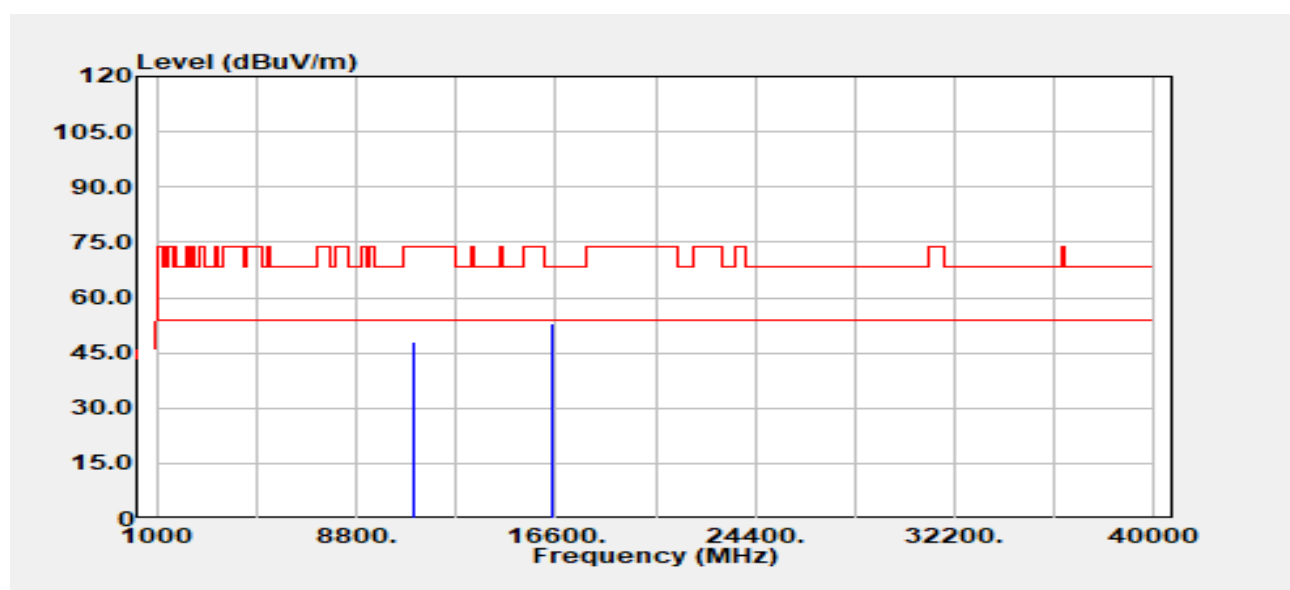


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	34.51	13.59	48.10	74.00	-25.90
11000.00	Average	30.98	13.59	44.57	54.00	-9.43
16500.00	Peak	31.88	21.16	53.04	68.20	-15.16



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 236 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

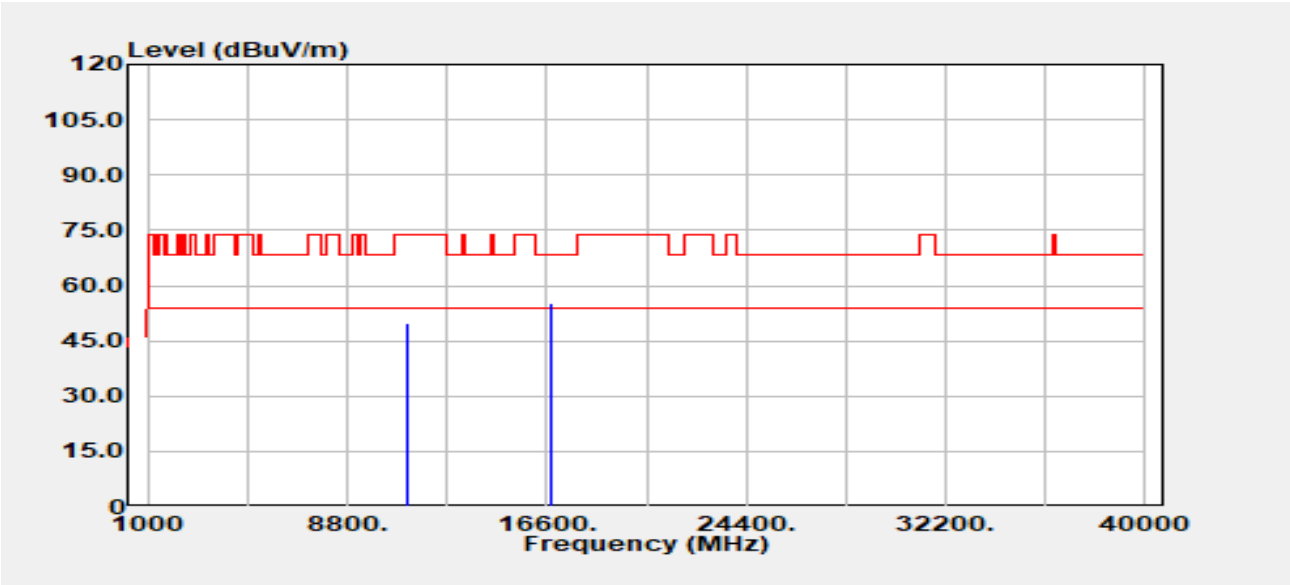


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	35.99	13.61	49.60	74.00	-24.40
11160.00	Average	32.89	13.61	46.50	54.00	-7.50
16740.00	Peak	32.79	22.60	55.39	68.20	-12.81

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 237 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band3
Frequency :5580 MHz
Operation Mode :TX
EUT Pol :E2
Setting :11

Test Date :2024-09-04
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

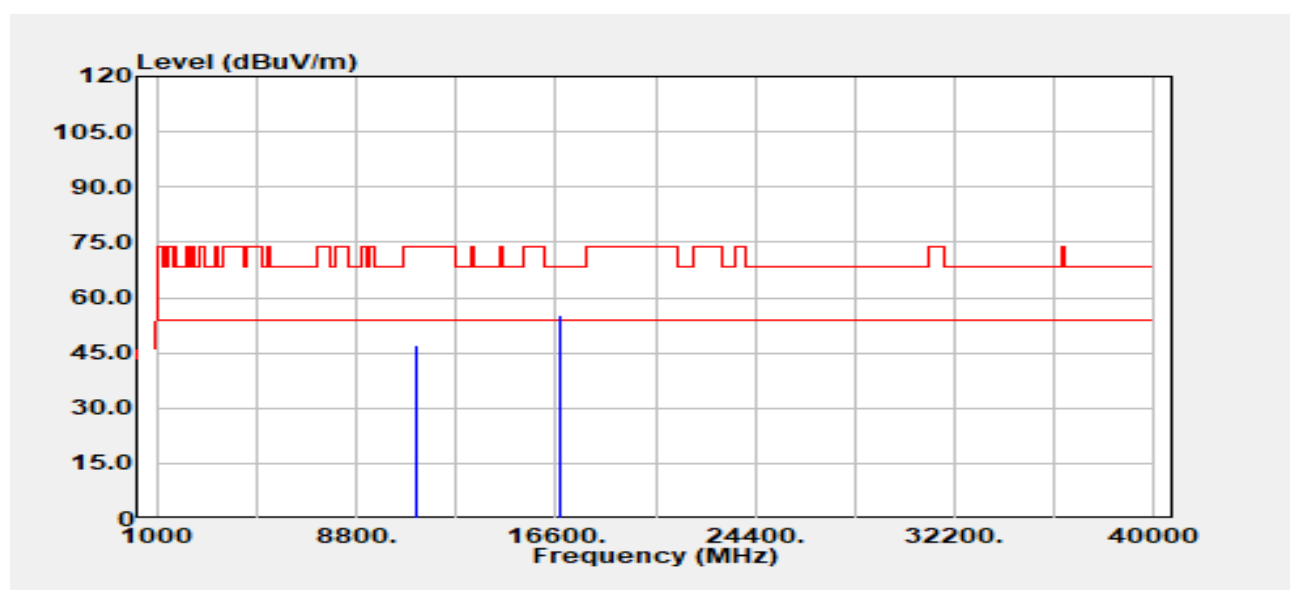


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	33.33	13.61	46.94	74.00	-27.06
11160.00	Average	29.21	13.61	42.82	54.00	-11.18
16740.00	Peak	32.53	22.60	55.13	68.20	-13.07



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 238 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

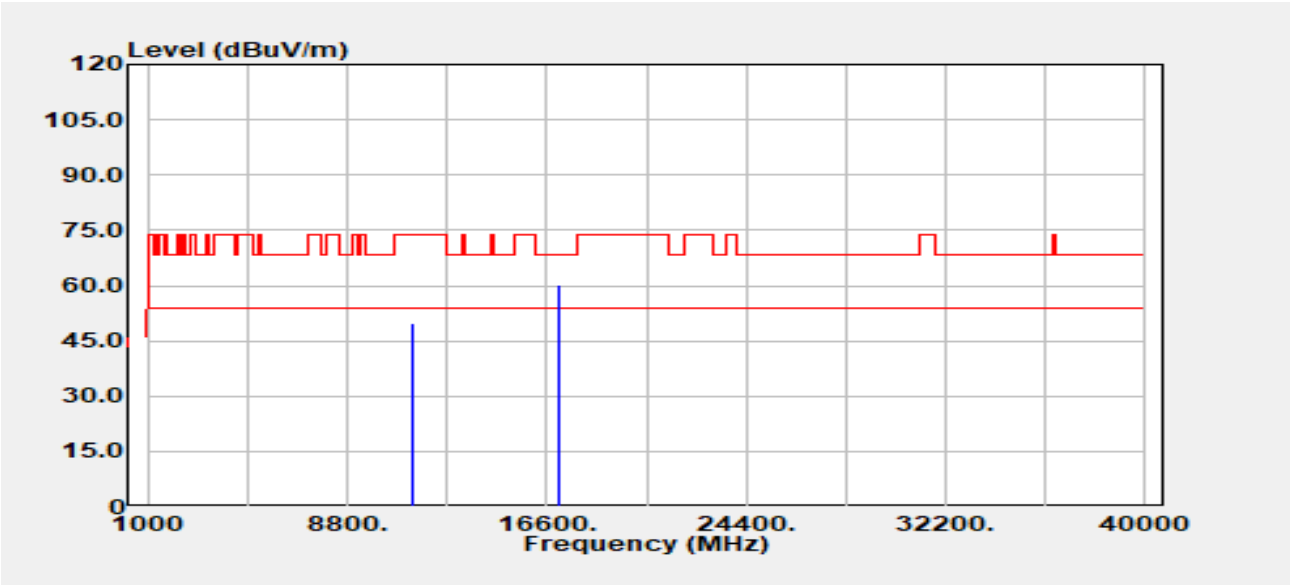


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	36.19	13.81	50.00	74.00	-24.00
11400.00	Average	32.65	13.81	46.46	54.00	-7.54
17100.00	Peak	32.84	27.61	60.45	68.20	-7.75



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 239 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band3	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

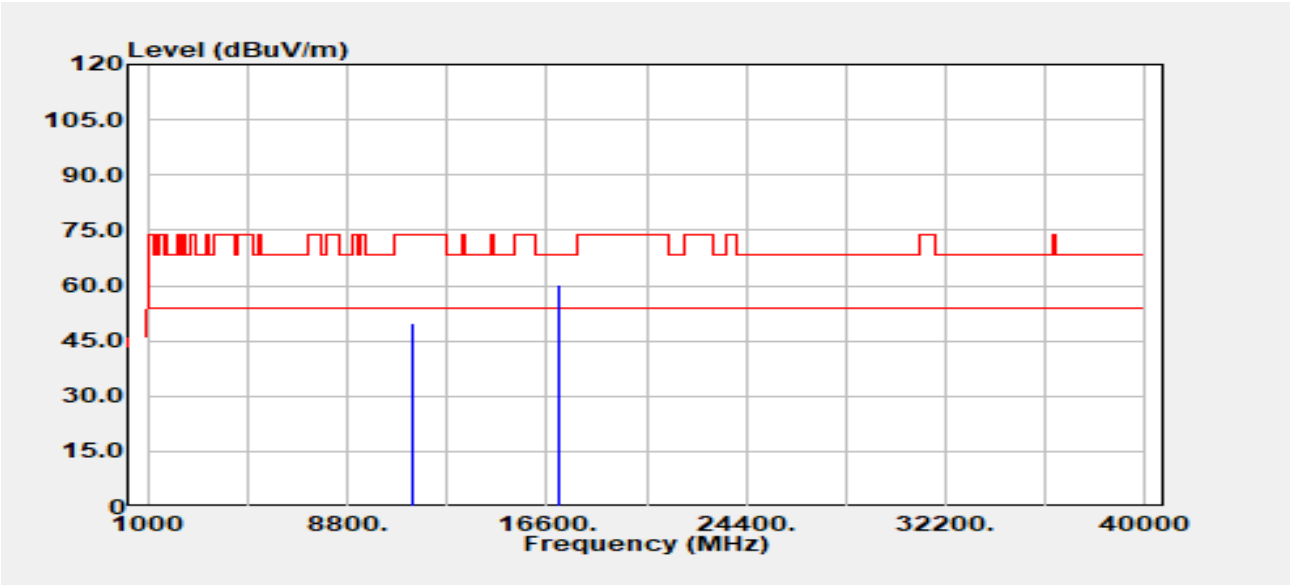


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	36.19	13.81	50.00	74.00	-24.00
11400.00	Average	30.70	13.81	44.51	54.00	-9.49
17100.00	Peak	32.58	27.61	60.19	68.20	-8.01



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 240 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5510 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

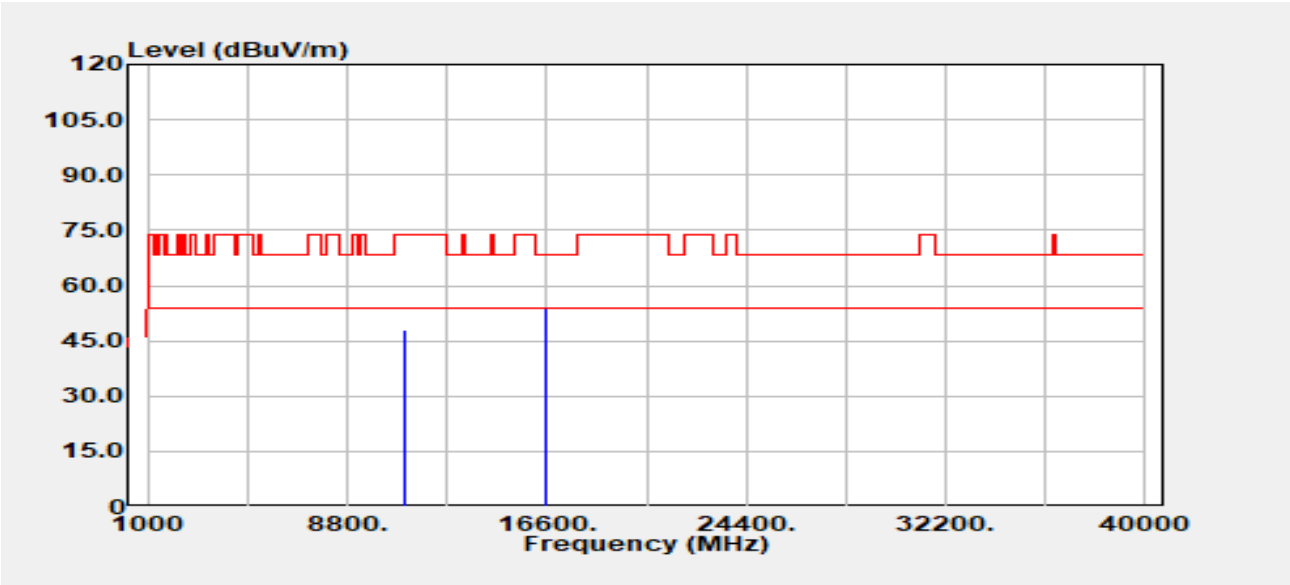


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.00	Peak	34.36	13.75	48.10	74.00	-25.90
11020.00	Average	28.54	13.75	42.28	54.00	-11.72
16530.00	Peak	32.99	20.98	53.97	68.20	-14.23



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 241 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5510 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

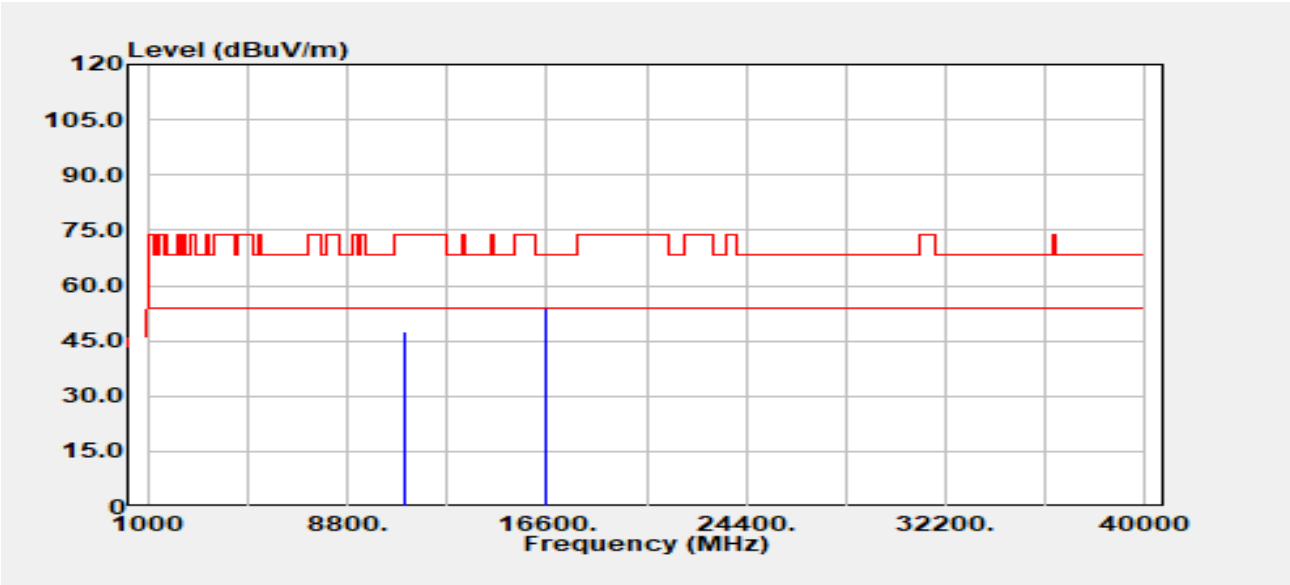


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.00	Peak	33.70	13.75	47.45	74.00	-26.55
11020.00	Average	26.63	13.75	40.38	54.00	-13.62
16530.00	Peak	32.70	20.98	53.67	68.20	-14.53



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 242 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5550 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

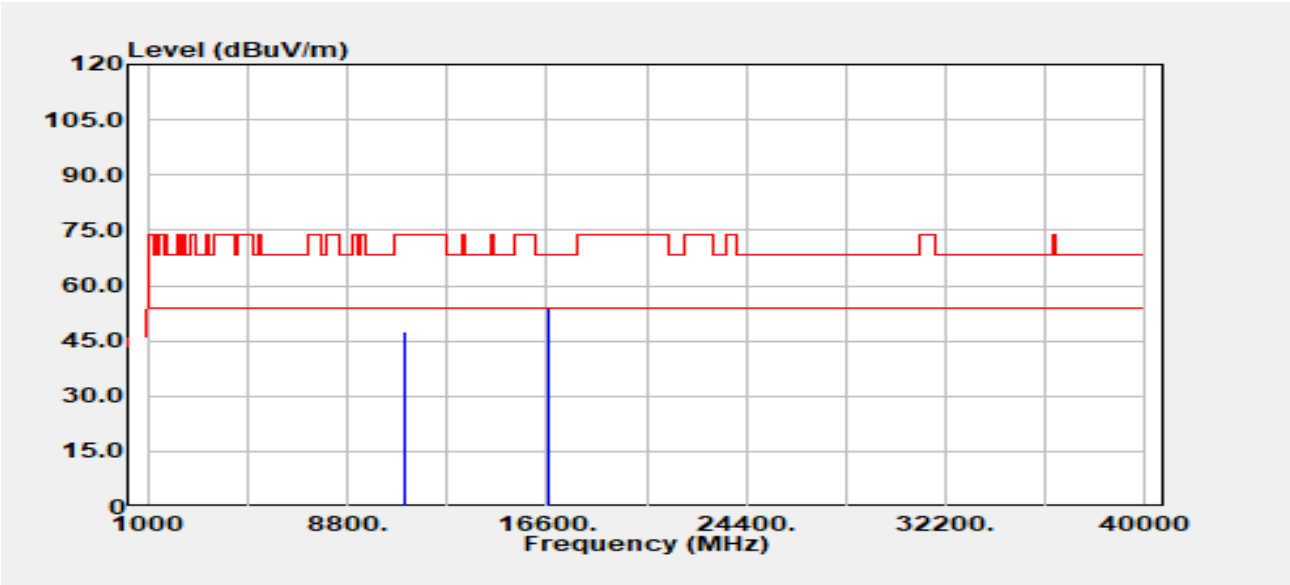


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.00	Peak	33.61	13.93	47.54	74.00	-26.46
11100.00	Average	26.86	13.93	40.79	54.00	-13.21
16650.00	Peak	32.34	21.52	53.86	68.20	-14.34



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 243 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5550 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

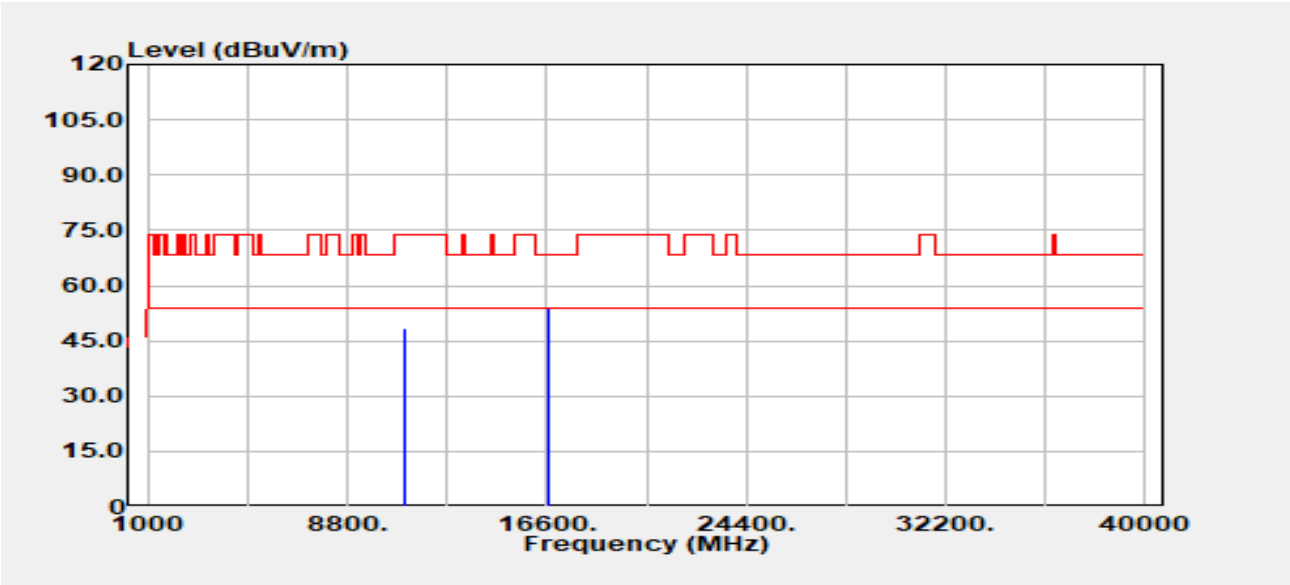


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.00	Peak	34.48	13.93	48.41	74.00	-25.59
11100.00	Average	26.30	13.93	40.23	54.00	-13.77
16650.00	Peak	32.27	21.52	53.79	68.20	-14.41



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 244 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5670 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

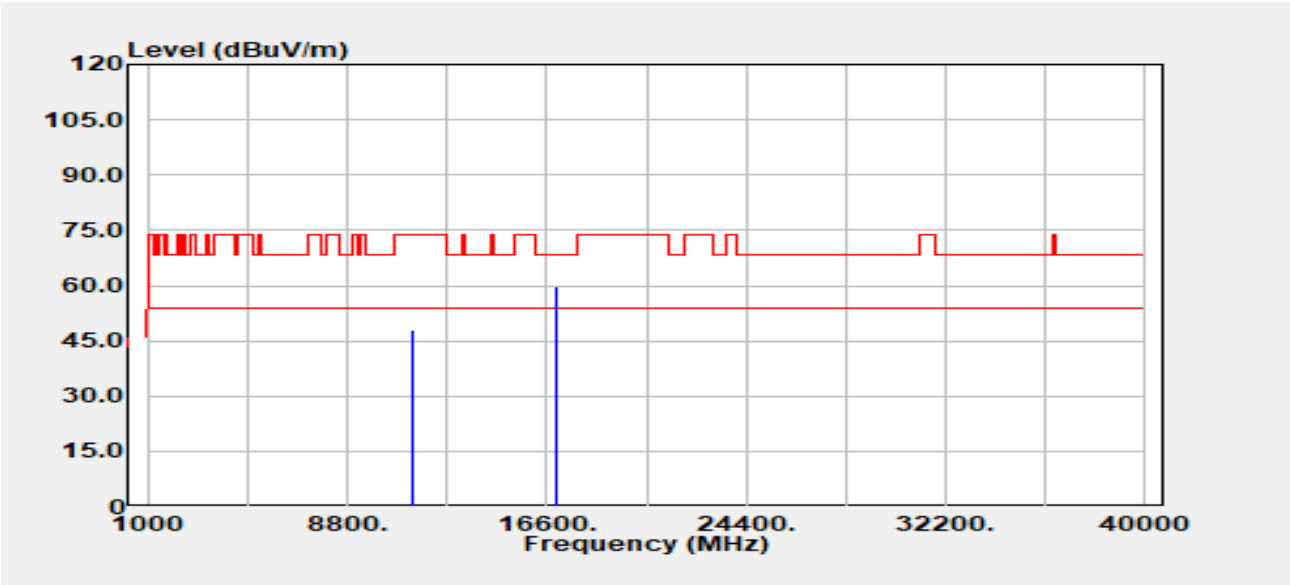


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.00	Peak	34.23	13.87	48.10	74.00	-25.90
11340.00	Average	25.78	13.87	39.65	54.00	-14.35
17010.00	Peak	32.76	26.82	59.58	68.20	-8.62



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 245 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band3	Temp./Humi.	:24.6/57
Frequency	:5670 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

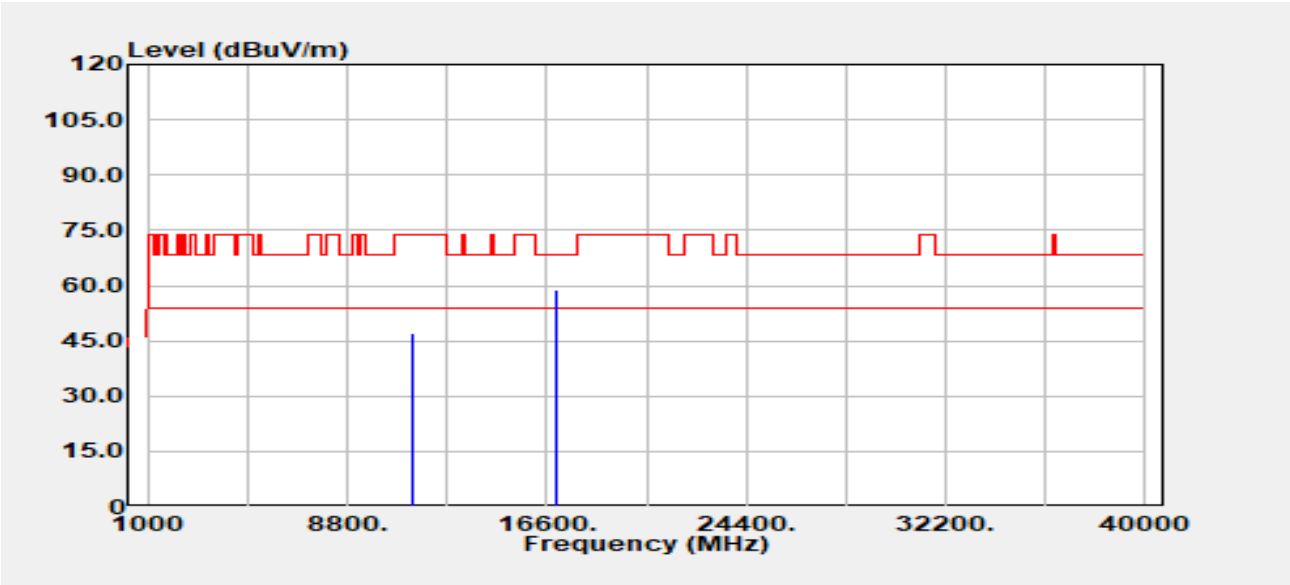


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.00	Peak	33.16	13.87	47.03	74.00	-26.97
11340.00	Average	25.38	13.87	39.24	54.00	-14.76
17010.00	Peak	31.95	26.82	58.77	68.20	-9.43



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 246 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-05
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5530 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

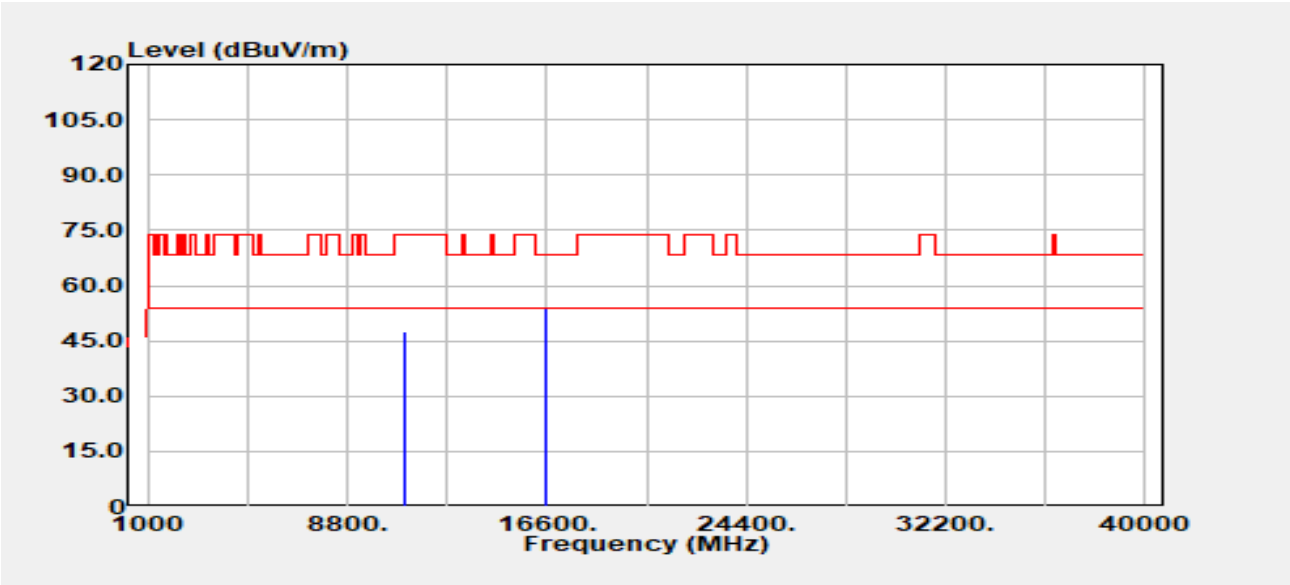


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.00	Peak	33.74	13.97	47.72	74.00	-26.28
11060.00	Average	26.57	13.97	40.55	54.00	-13.45
16590.00	Peak	32.73	21.10	53.83	68.20	-14.37



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 247 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-05
Operation Band	:802.11ac80/Band3	Temp./Humi.	:24.6/57
Frequency	:5530 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

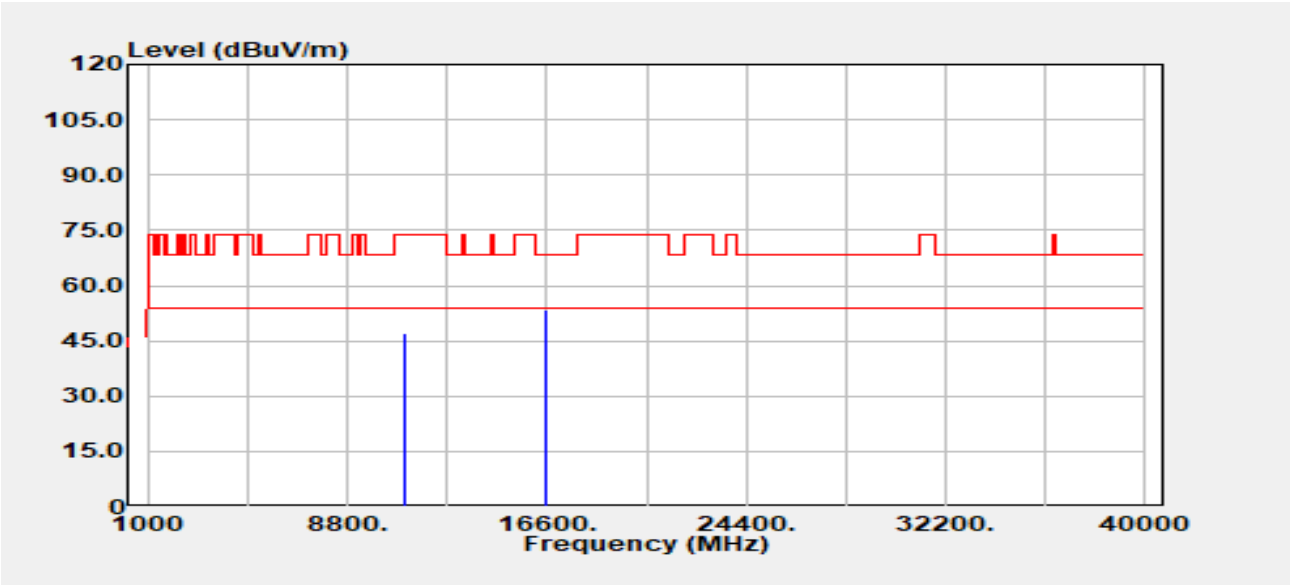


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.00	Peak	32.93	13.97	46.91	74.00	-27.09
11060.00	Average	26.56	13.97	40.53	54.00	-13.47
16590.00	Peak	32.48	21.10	53.58	68.20	-14.62



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 248 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax20/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

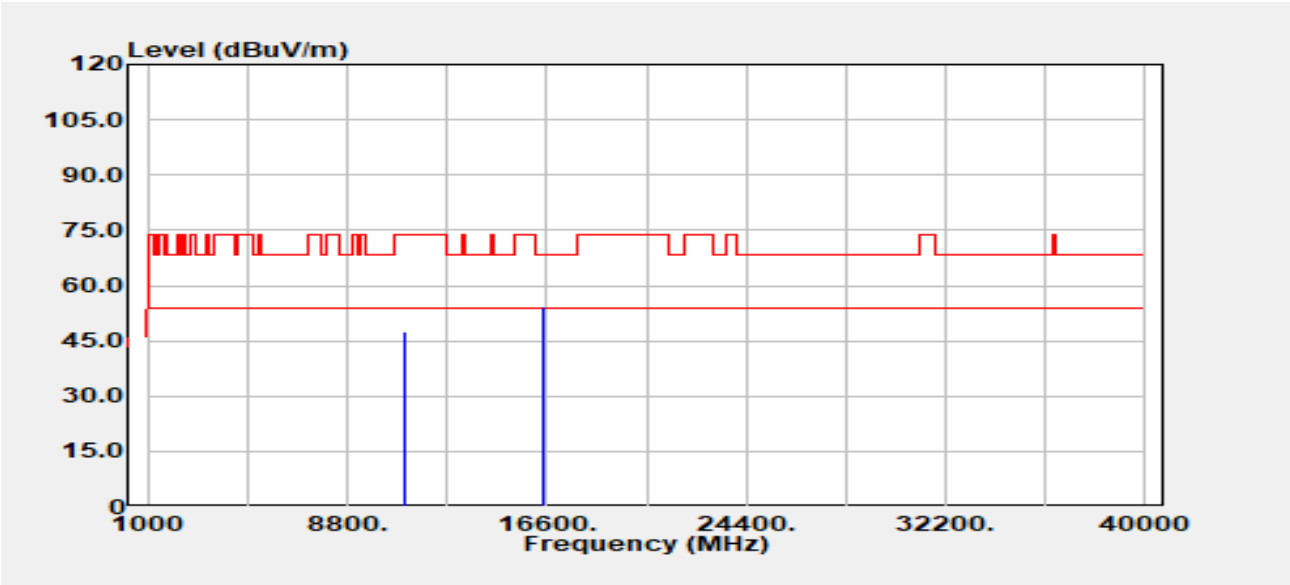


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	33.90	13.59	47.49	74.00	-26.51
11000.00	Average	28.69	13.59	42.28	54.00	-11.72
16500.00	Peak	33.39	21.16	54.55	68.20	-13.65



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 249 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax20/Band3	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

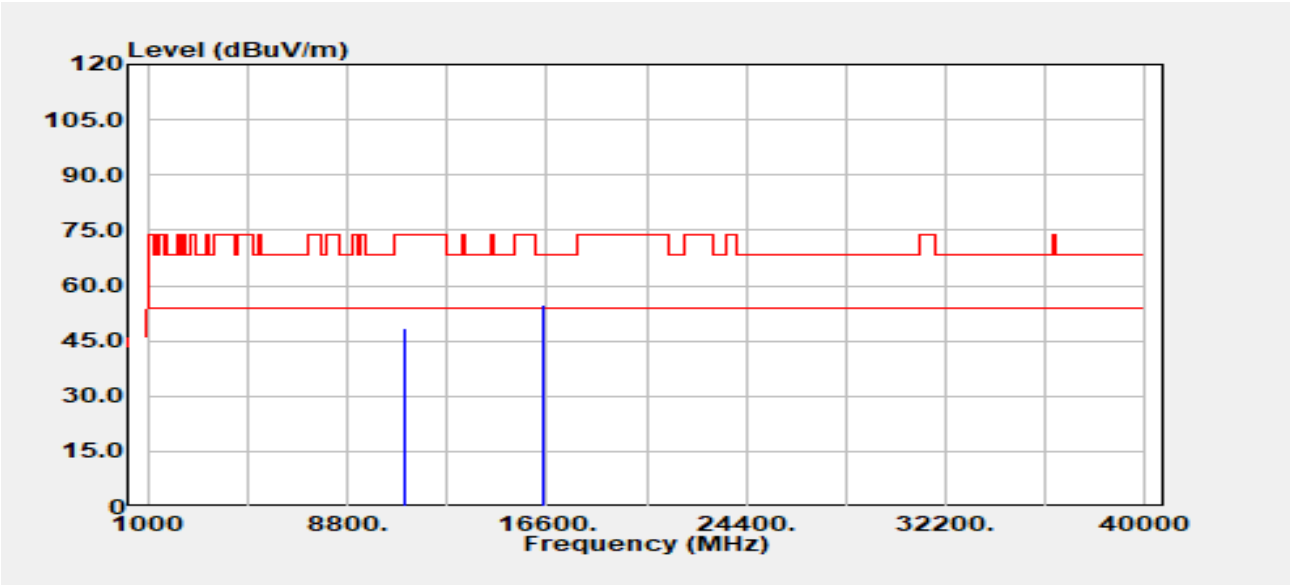


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11000.00	Peak	34.79	13.59	48.38	74.00	-25.62
11000.00	Average	28.52	13.59	42.11	54.00	-11.89
16500.00	Peak	33.47	21.16	54.63	68.20	-13.57



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 250 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax20/Band3	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

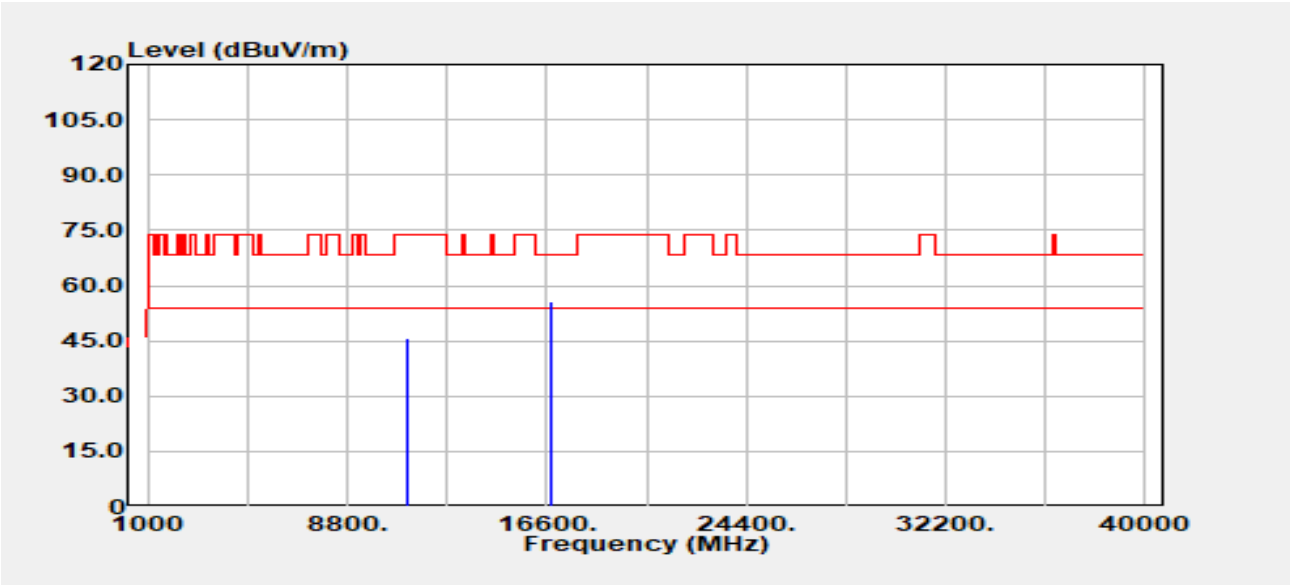


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	32.12	13.61	45.73	74.00	-28.27
11160.00	Average	28.87	13.61	42.48	54.00	-11.52
16740.00	Peak	32.97	22.60	55.57	68.20	-12.63



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 251 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax20/Band3	Temp./Humi.	:24.6/57
Frequency	:5580 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

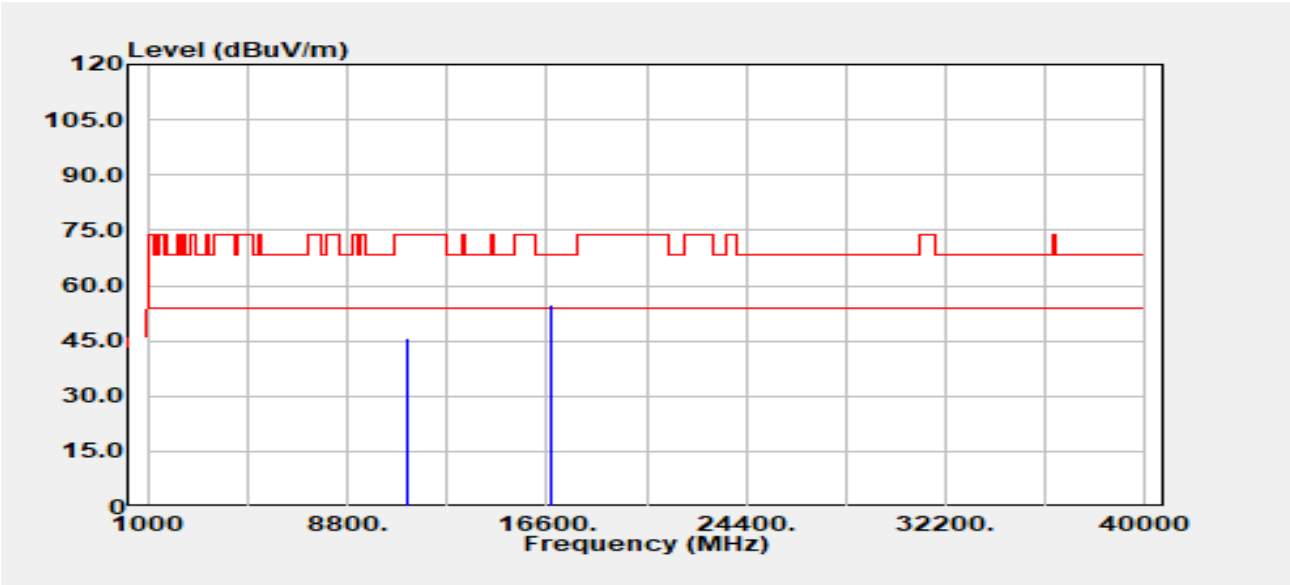


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11160.00	Peak	32.30	13.61	45.91	74.00	-28.09
11160.00	Average	27.73	13.61	41.34	54.00	-12.66
16740.00	Peak	32.32	22.60	54.92	68.20	-13.28

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 252 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray Li
Test Chamber : 966A

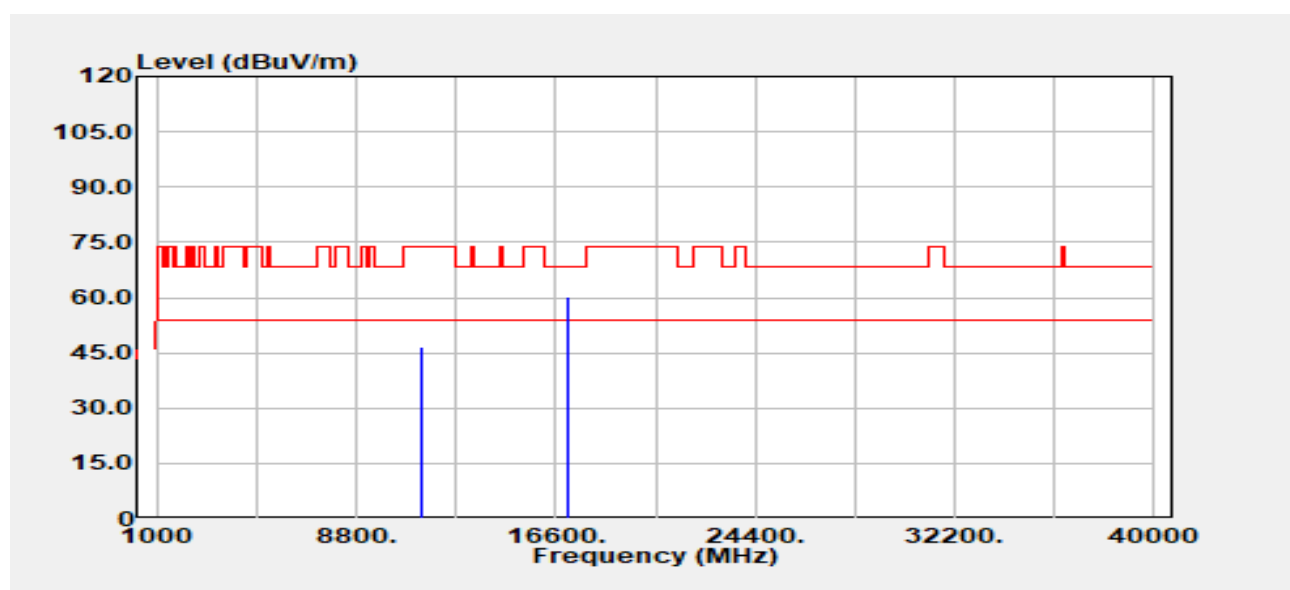


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	32.90	13.81	46.71	74.00	-27.29
11400.00	Average	28.88	13.81	42.69	54.00	-11.31
17100.00	Peak	32.56	27.61	60.17	68.20	-8.03

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 253 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band3
Frequency :5700 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

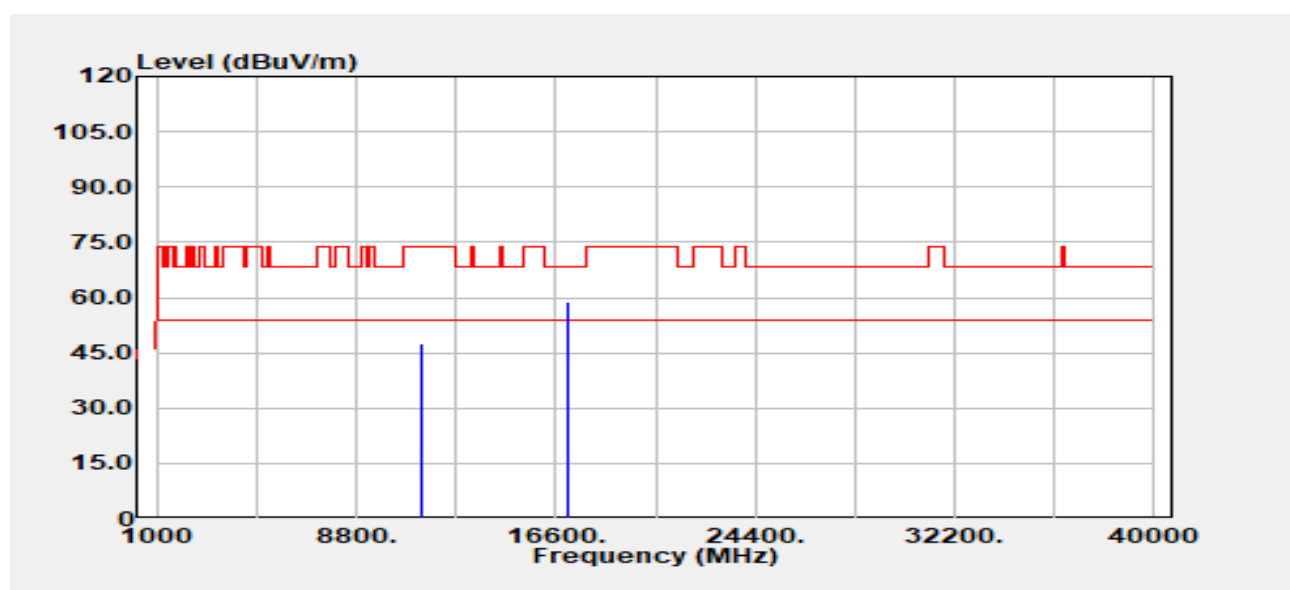


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11400.00	Peak	33.63	13.81	47.44	74.00	-26.56
11400.00	Average	28.58	13.81	42.39	54.00	-11.61
17100.00	Peak	31.48	27.61	59.09	68.20	-9.11

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 254 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band3
Frequency :5510 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

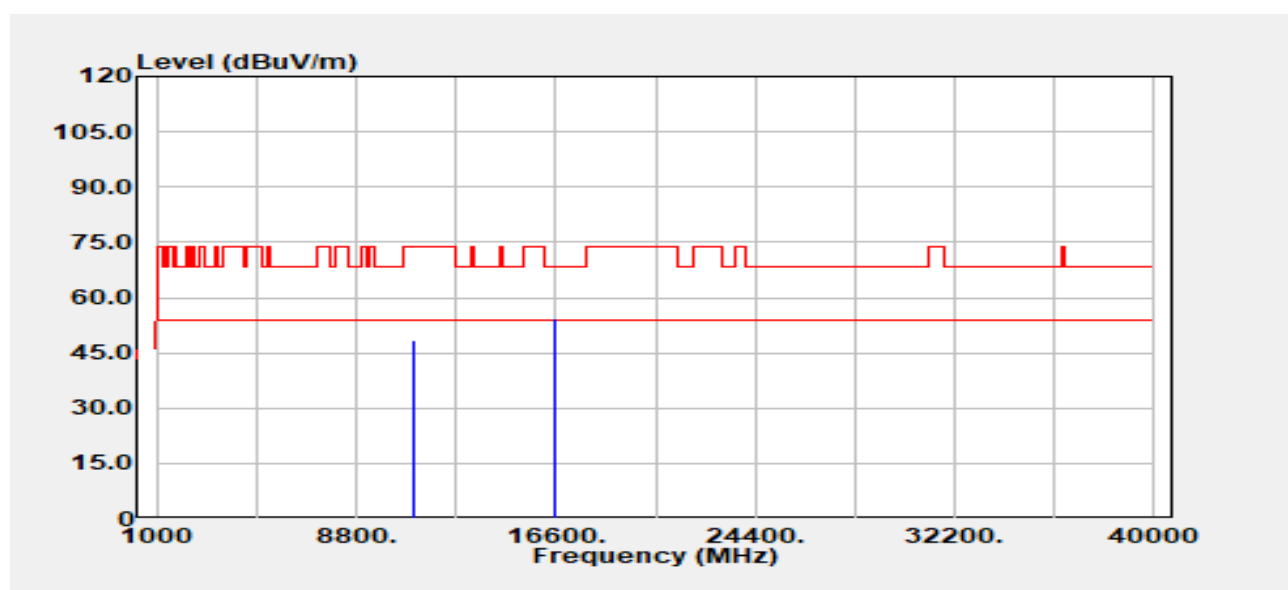


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.00	Peak	34.85	13.75	48.59	74.00	-25.41
11020.00	Average	26.97	13.75	40.72	54.00	-13.28
16530.00	Peak	33.36	20.98	54.34	68.20	-13.86



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 255 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band3	Temp./Humi.	:24.6/57
Frequency	:5510 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

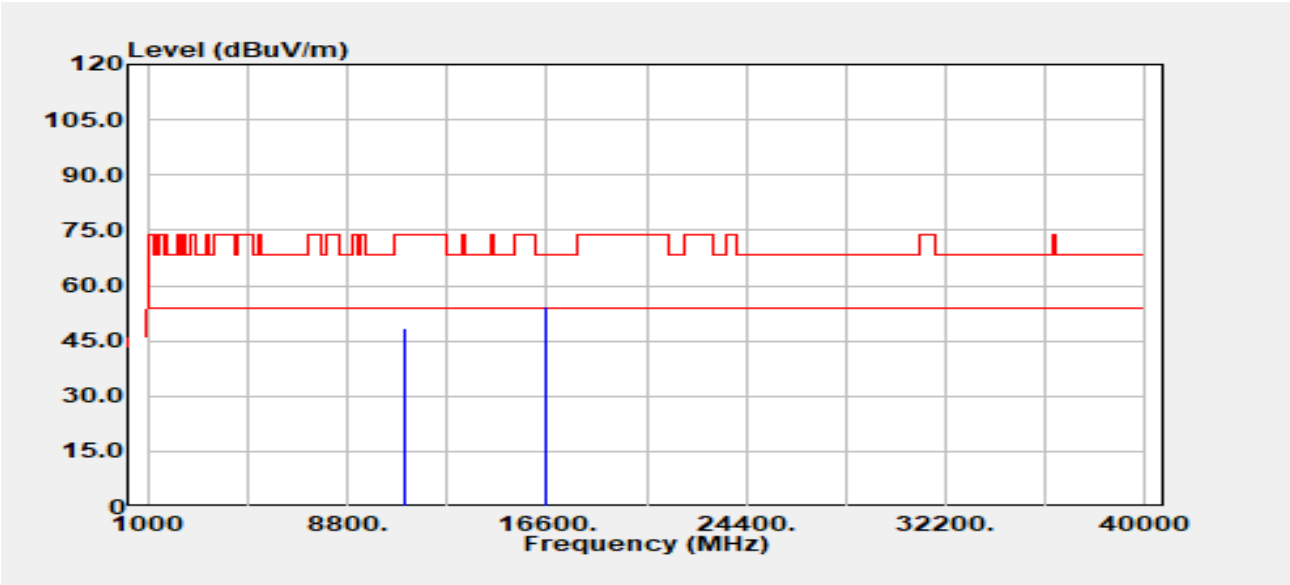


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11020.00	Peak	34.57	13.75	48.32	74.00	-25.68
11020.00	Average	26.43	13.75	40.17	54.00	-13.83
16530.00	Peak	33.55	20.98	54.53	68.20	-13.67



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 256 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band3	Temp./Humi.	:24.6/57
Frequency	:5550 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

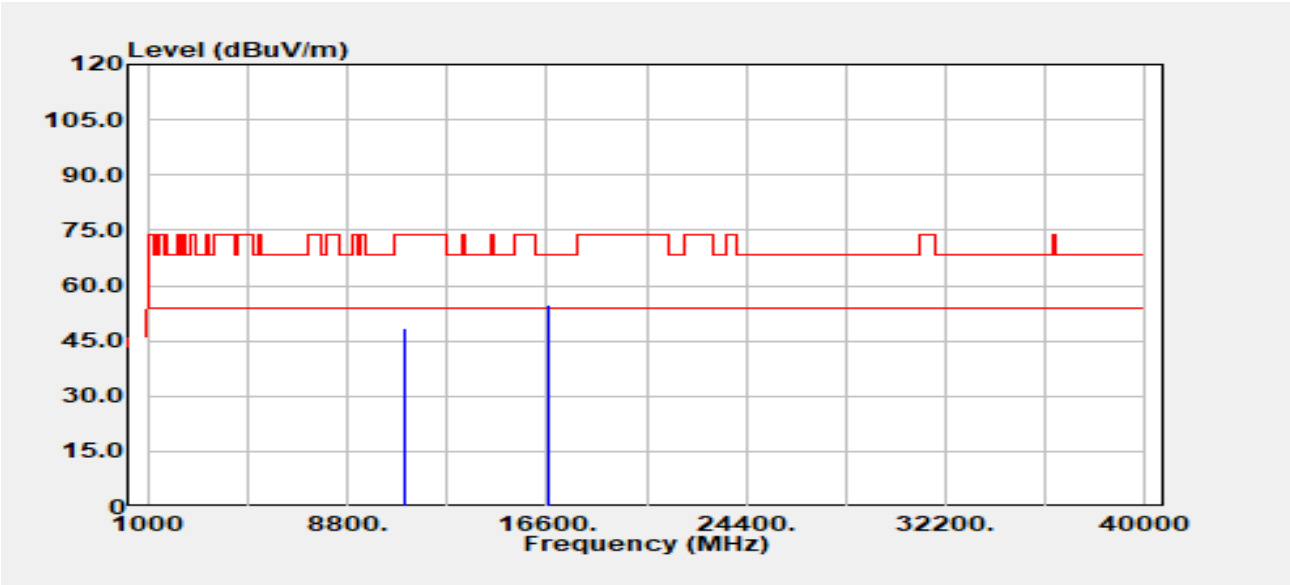


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.00	Peak	34.55	13.93	48.48	74.00	-25.52
11100.00	Average	26.23	13.93	40.16	54.00	-13.84
16650.00	Peak	33.12	21.52	54.64	68.20	-13.56

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 257 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band3
Frequency :5550 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

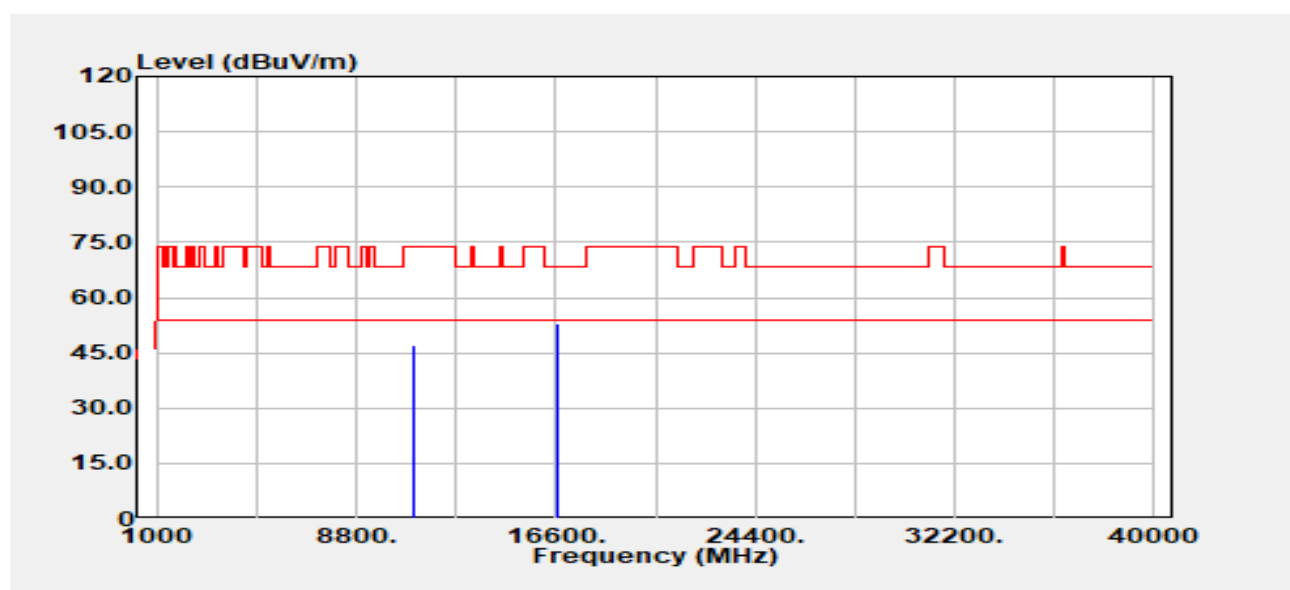


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11100.00	Peak	33.26	13.93	47.19	74.00	-26.81
11100.00	Average	26.08	13.93	40.01	54.00	-13.99
16650.00	Peak	31.33	21.52	52.85	68.20	-15.35

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 258 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band3
Frequency :5670 MHz
Operation Mode :TX
EUT Pol :E2
Setting :13

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

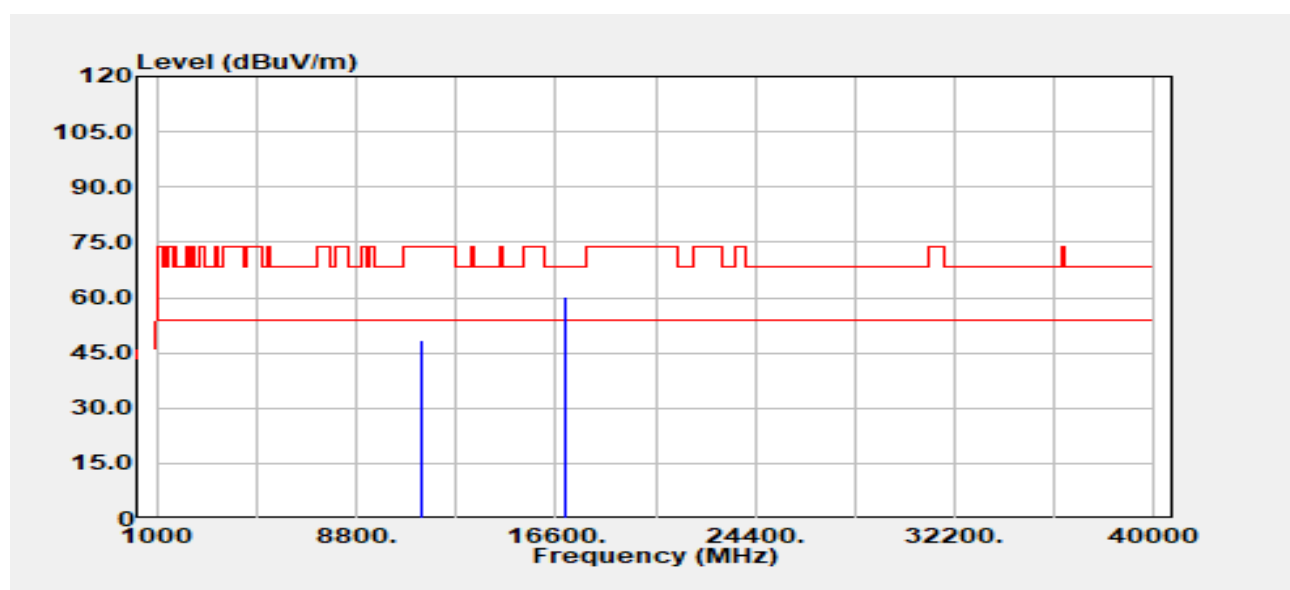


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.00	Peak	34.37	13.87	48.23	74.00	-25.77
11340.00	Average	26.49	13.87	40.36	54.00	-13.65
17010.00	Peak	33.57	26.82	60.40	68.20	-7.80



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 259 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band3	Temp./Humi.	:24.6/57
Frequency	:5670 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

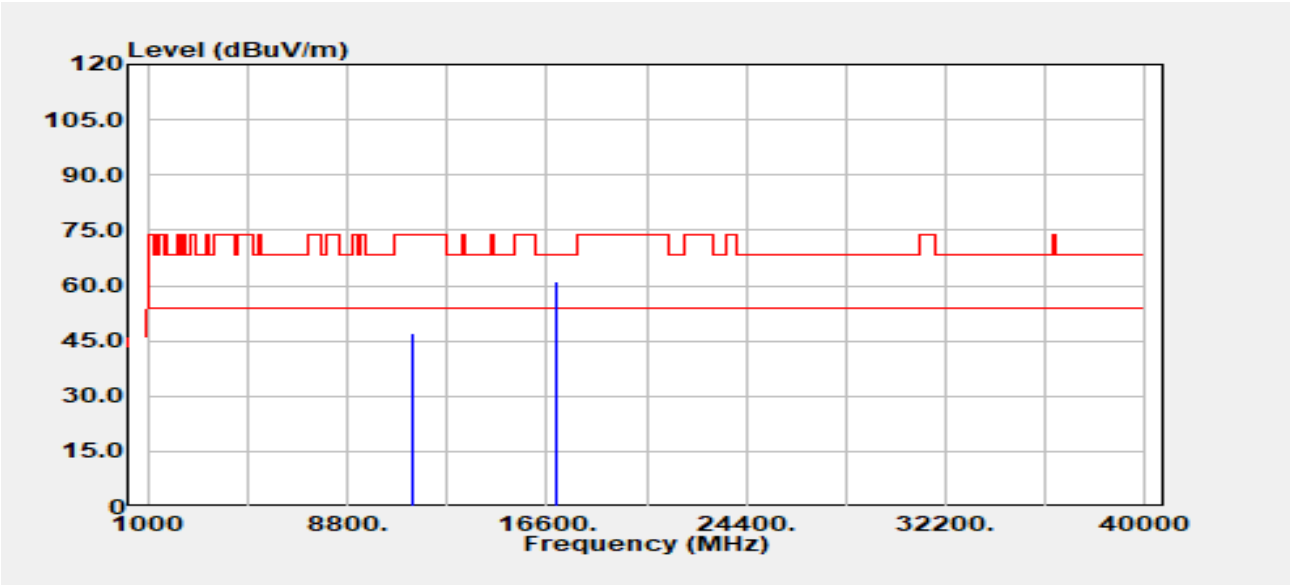


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11340.00	Peak	33.35	13.87	47.22	74.00	-26.78
11340.00	Average	26.36	13.87	40.22	54.00	-13.78
17010.00	Peak	34.36	26.82	61.18	68.20	-7.02



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 260 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax80/Band3	Temp./Humi.	:24.6/57
Frequency	:5530 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

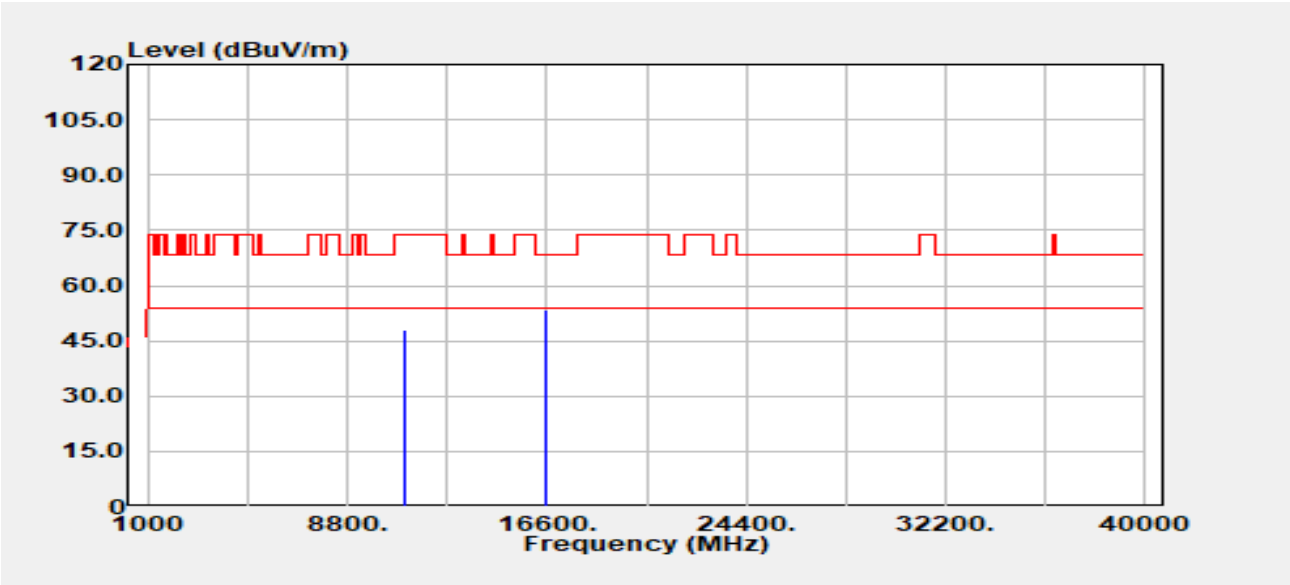


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.00	Peak	34.00	13.97	47.97	74.00	-26.03
11060.00	Average	26.75	13.97	40.72	54.00	-13.28
16590.00	Peak	32.32	21.10	53.42	68.20	-14.78



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 261 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax80/Band3	Temp./Humi.	:24.6/57
Frequency	:5530 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

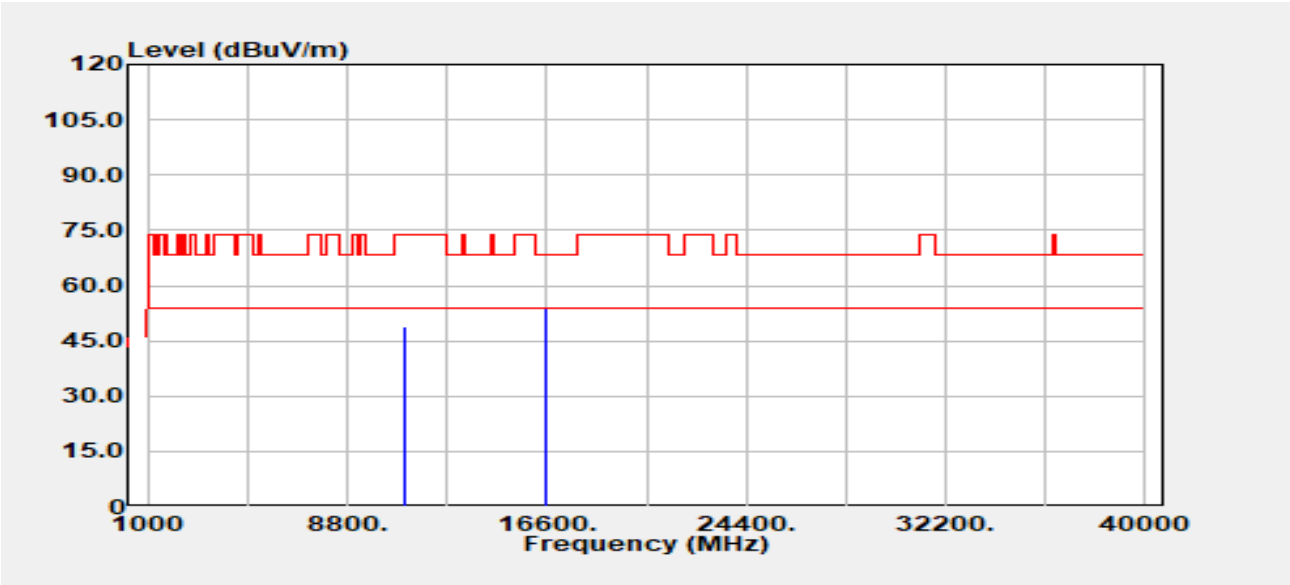


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11060.00	Peak	34.76	13.97	48.74	74.00	-25.26
11060.00	Average	26.63	13.97	40.60	54.00	-13.40
16590.00	Peak	32.74	21.10	53.84	68.20	-14.36

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 262 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12

Test Date :2024-09-05
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

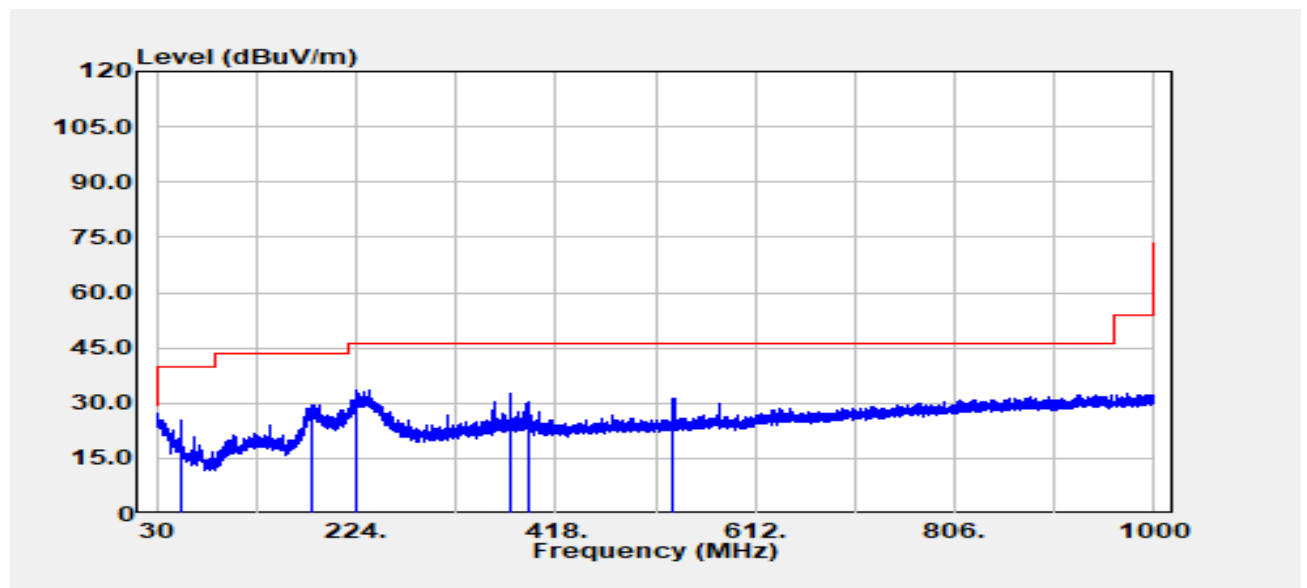


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
53.60	Peak	41.77	-16.41	25.36	40.00	-14.64
181.80	Peak	41.86	-12.21	29.65	43.50	-13.85
225.20	Peak	45.67	-12.38	33.30	46.00	-12.70
373.30	Peak	40.24	-7.65	32.59	46.00	-13.41
390.90	Peak	37.45	-7.15	30.31	46.00	-15.69
531.90	Peak	35.34	-3.91	31.43	46.00	-14.57

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 263 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12

Test Date :2024-09-05
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

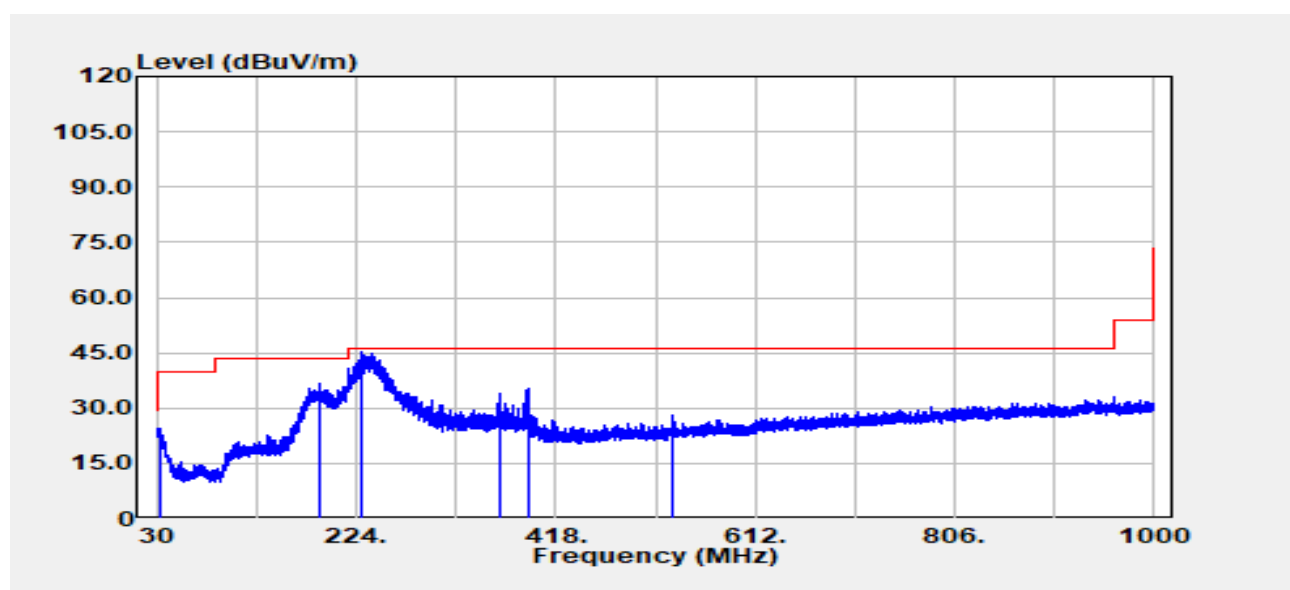


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
32.80	Peak	29.38	-5.02	24.36	40.00	-15.64
188.80	Peak	48.86	-12.03	36.83	43.50	-6.67
230.10	QP	52.12	-12.05	40.07	46.00	-5.93
363.00	Peak	41.77	-7.88	33.88	46.00	-12.12
390.80	Peak	42.27	-7.16	35.12	46.00	-10.88
532.70	Peak	31.78	-3.92	27.86	46.00	-18.14

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 264 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band4_CH0
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray Li
Test Chamber : 966A

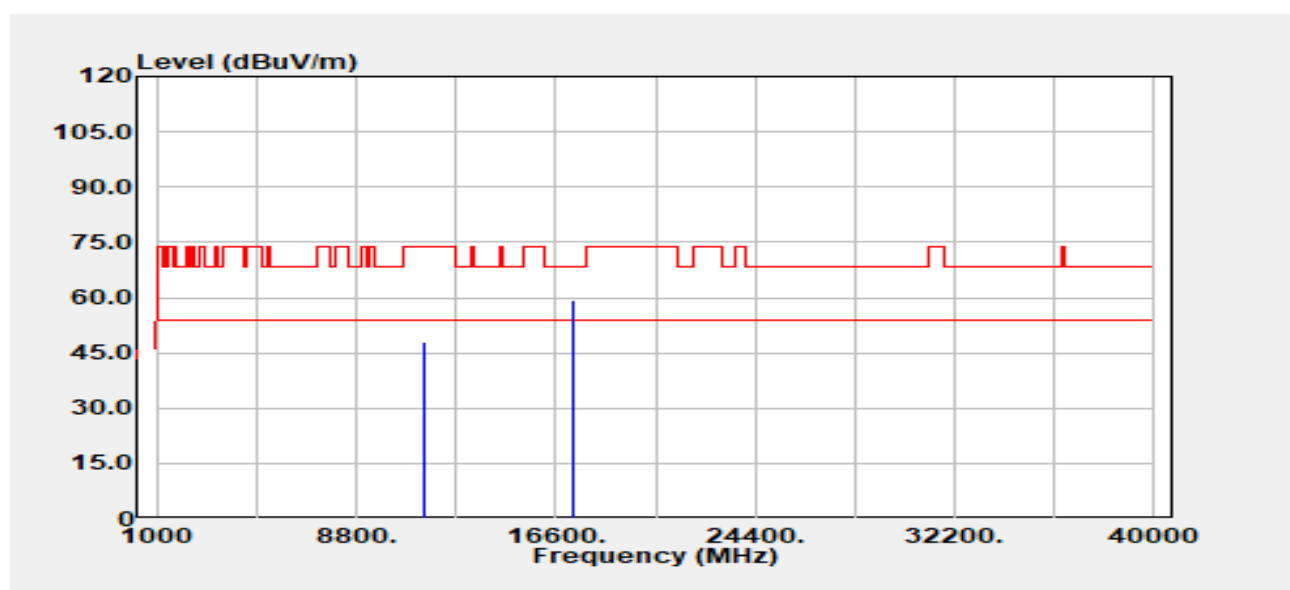


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	34.15	13.67	47.82	74.00	-26.18
11490.00	Average	31.79	13.67	45.46	54.00	-8.54
17235.00	Peak	31.46	28.05	59.51	68.20	-8.69



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 265 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band4_CH0	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

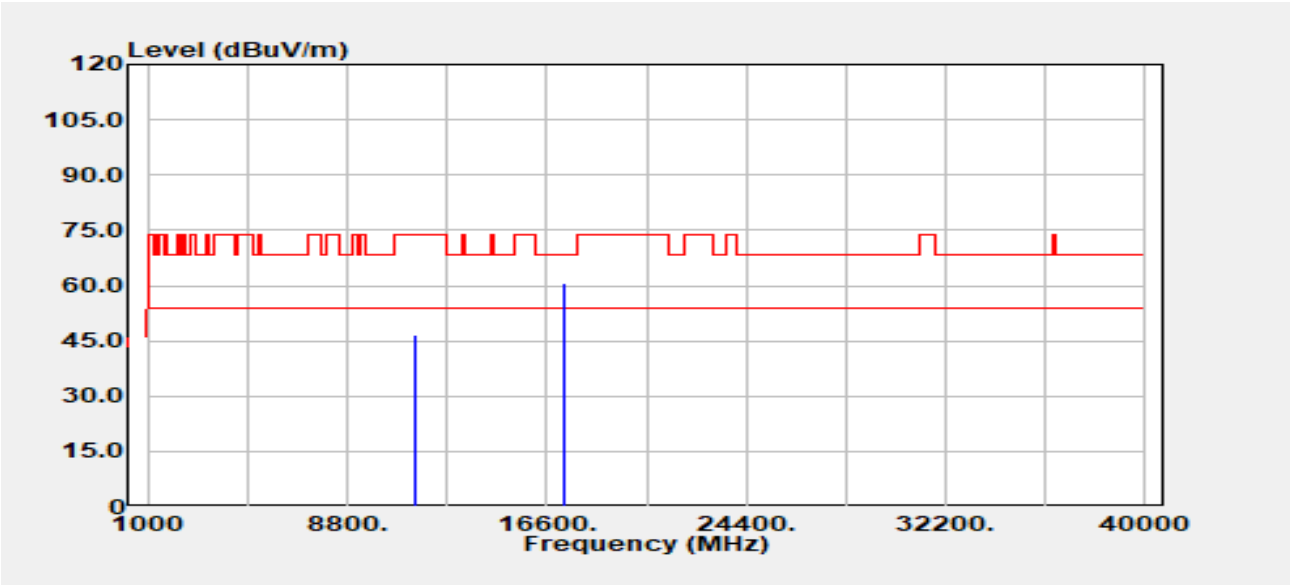


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	32.80	13.67	46.47	74.00	-27.53
11490.00	Average	29.16	13.67	42.83	54.00	-11.17
17235.00	Peak	32.80	28.05	60.85	68.20	-7.35



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 266 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band4_CH0	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

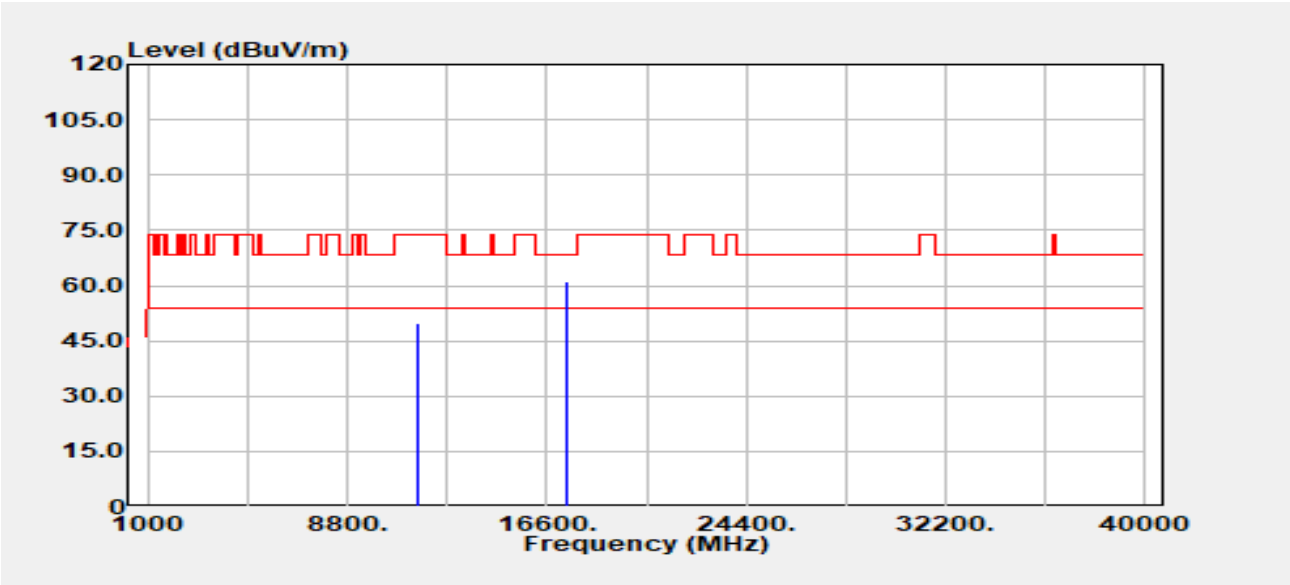


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	35.88	13.89	49.78	74.00	-24.22
11570.00	Average	31.99	13.89	45.89	54.00	-8.11
17355.00	Peak	33.61	27.33	60.94	68.20	-7.26

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 267 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band4_CH0	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

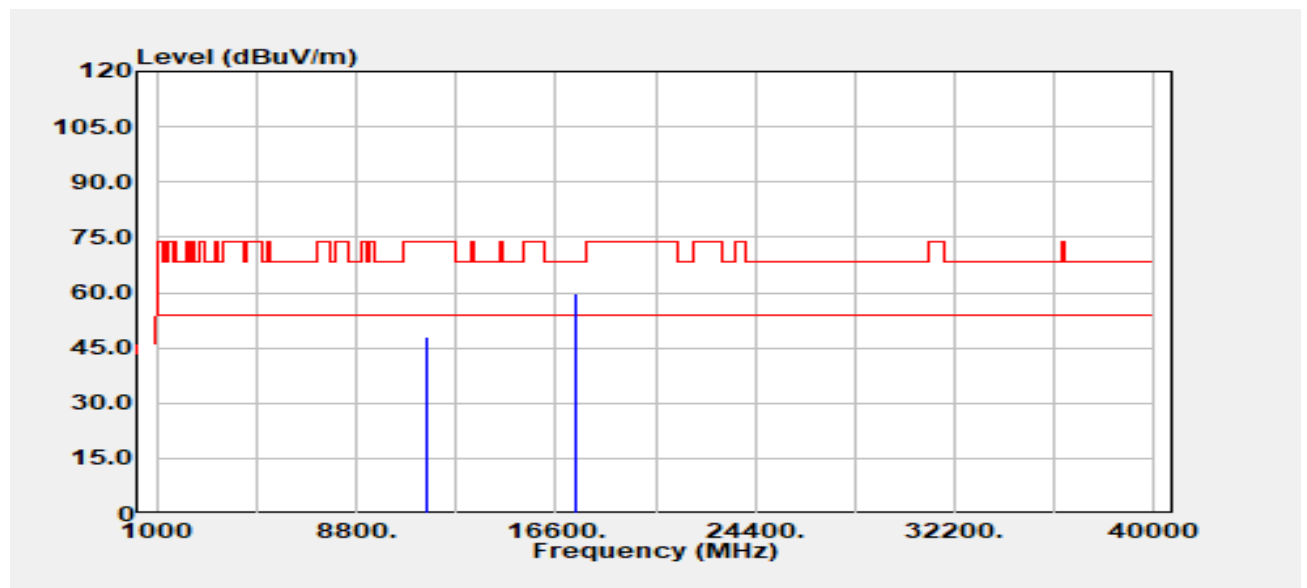


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
11570.00	Peak	34.25	13.89	48.14	74.00	-25.86
11570.00	Average	29.56	13.89	43.46	54.00	-10.54
17355.00	Peak	32.40	27.33	59.73	68.20	-8.47



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 268 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band4_CH0	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

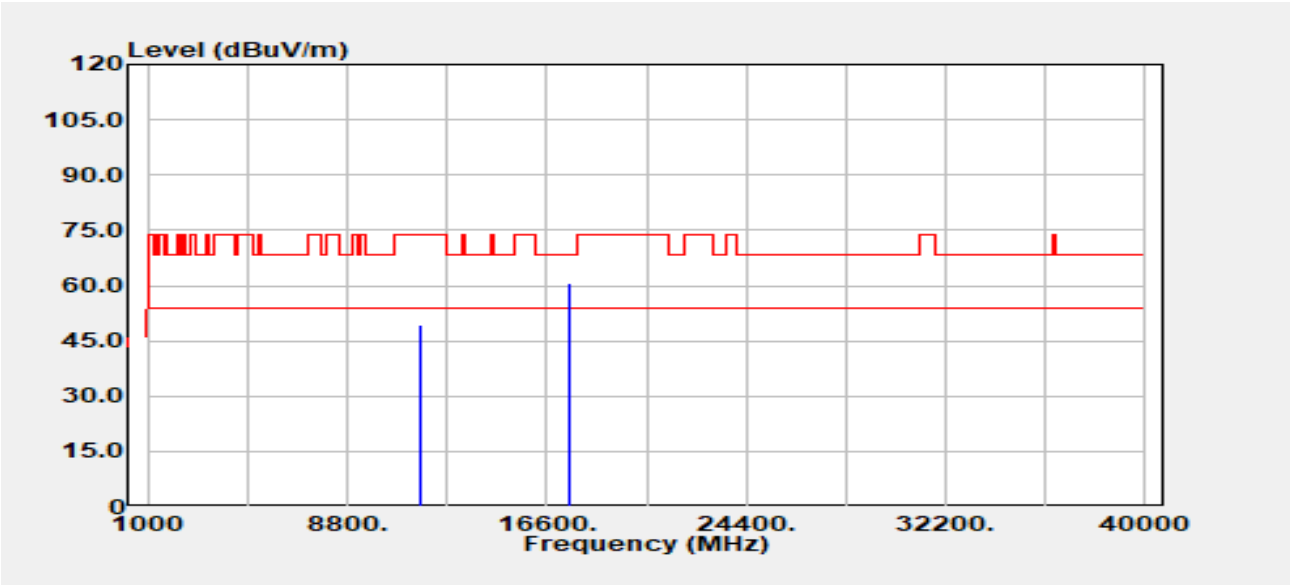


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	35.42	14.03	49.44	74.00	-24.56
11650.00	Average	32.88	14.03	46.91	54.00	-7.09
17475.00	Peak	33.34	27.18	60.52	68.20	-7.68



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 269 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-03
Operation Band	:802.11a/Band4_CH0	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

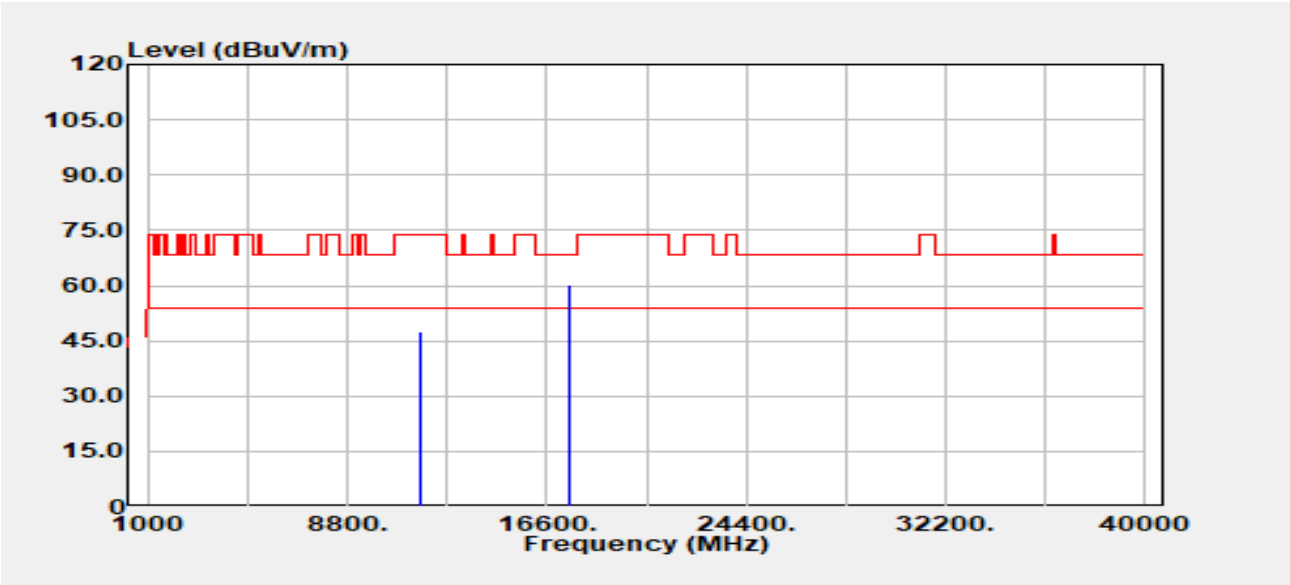


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	33.53	14.03	47.55	74.00	-26.45
11650.00	Average	29.01	14.03	43.03	54.00	-10.97
17475.00	Peak	33.04	27.18	60.22	68.20	-7.98



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 270 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band4_CH1	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

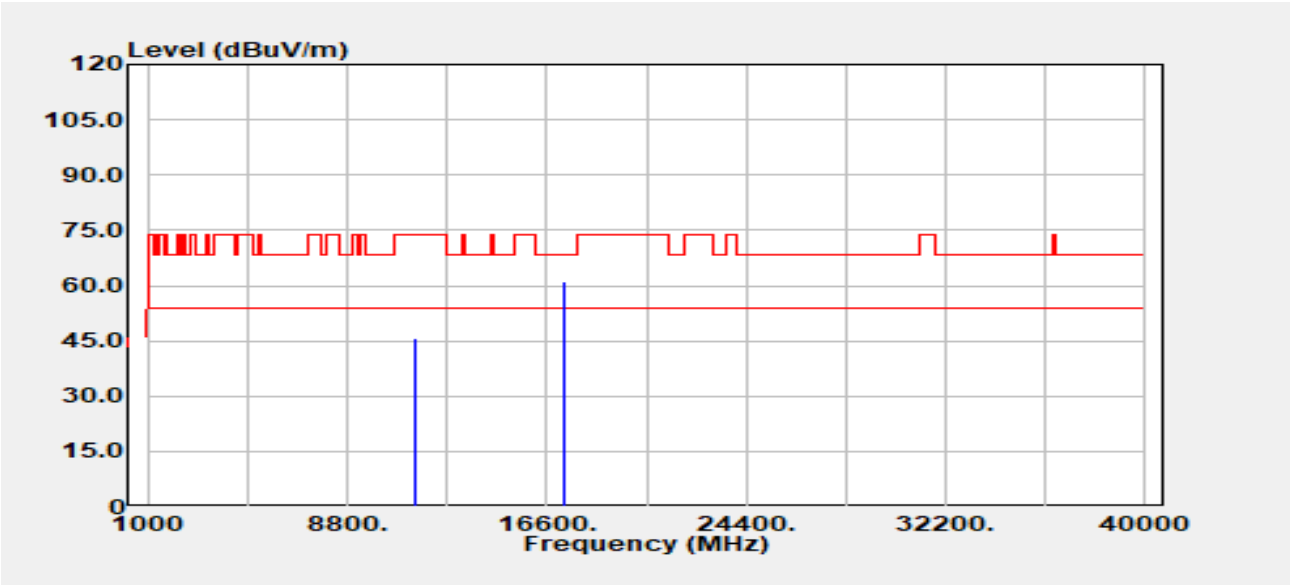


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	32.28	13.67	45.95	74.00	-28.05
11490.00	Average	29.31	13.67	42.98	54.00	-11.02
17235.00	Peak	33.18	28.05	61.23	68.20	-6.97



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 271 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band4_CH1	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

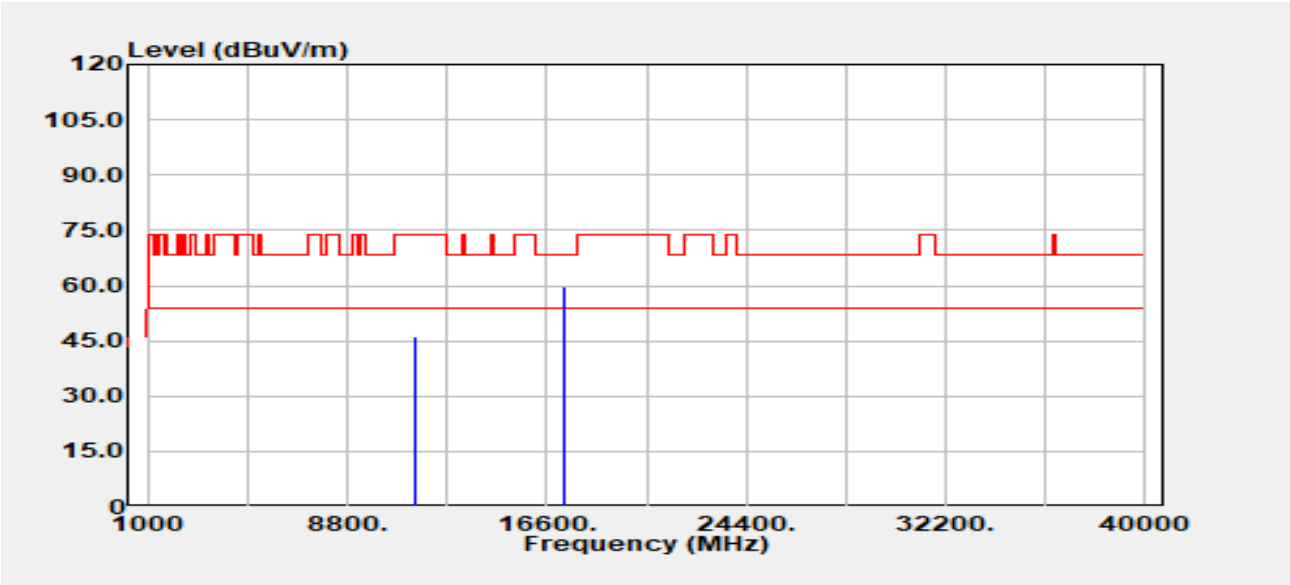


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	32.35	13.67	46.02	74.00	-27.98
11490.00	Average	27.53	13.67	41.20	54.00	-12.80
17235.00	Peak	31.50	28.05	59.55	68.20	-8.65



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 272 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band4_CH1	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

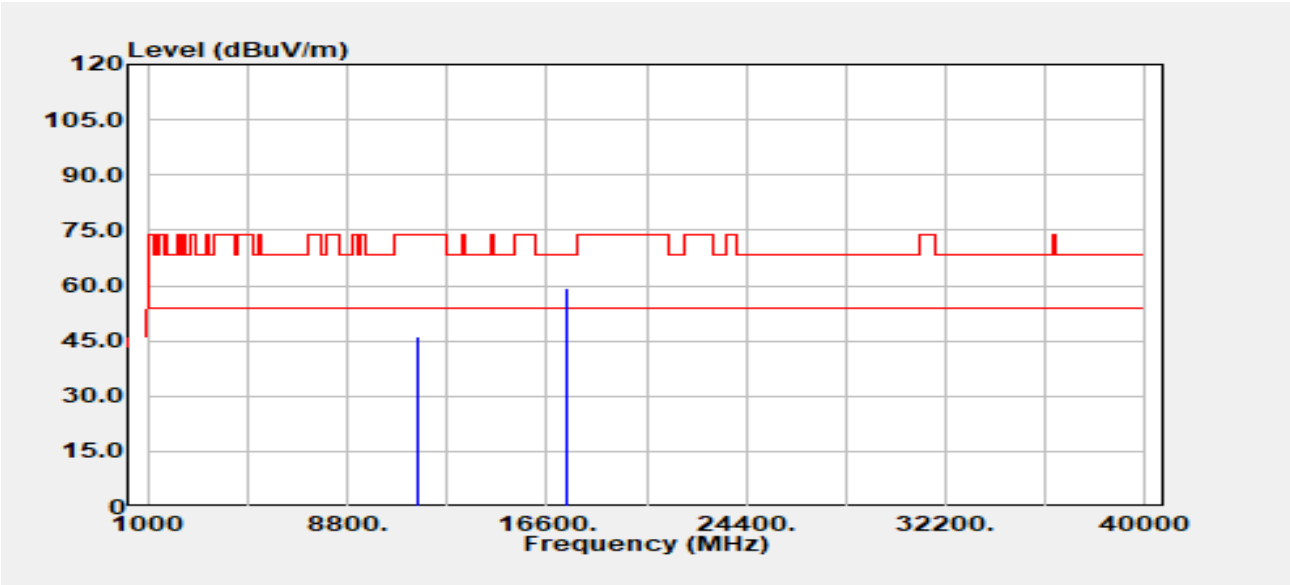


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	32.21	13.89	46.10	74.00	-27.90
11570.00	Average	28.57	13.89	42.47	54.00	-11.53
17355.00	Peak	32.12	27.33	59.45	68.20	-8.75



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 273 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band4_CH1	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

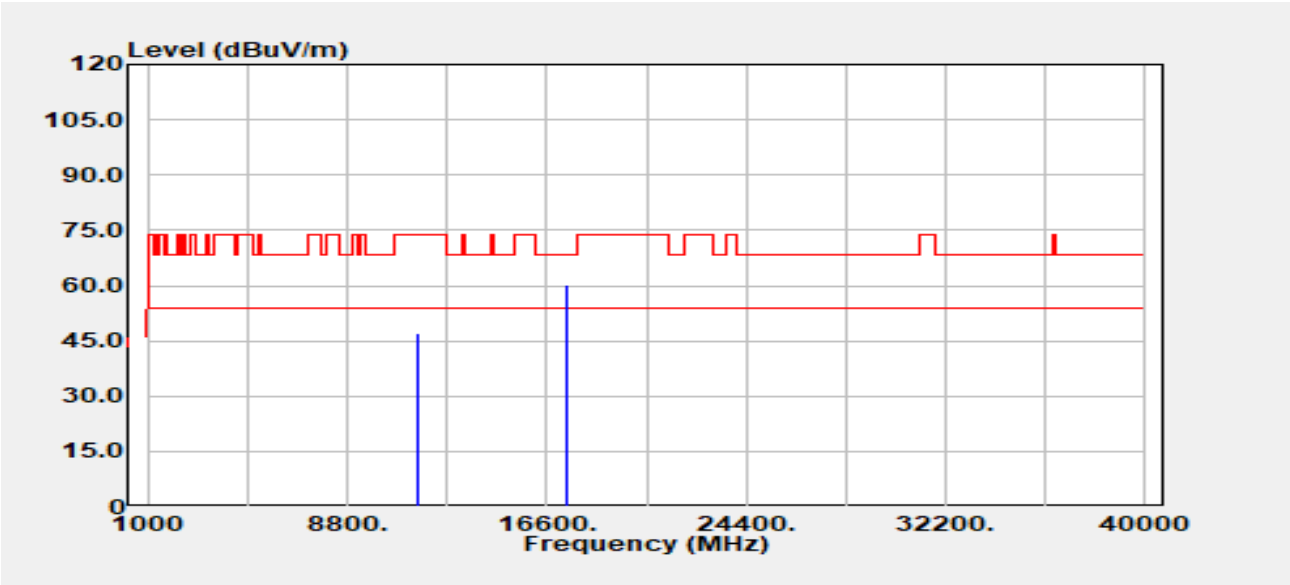


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	33.36	13.89	47.25	74.00	-26.75
11570.00	Average	27.44	13.89	41.33	54.00	-12.67
17355.00	Peak	33.12	27.33	60.45	68.20	-7.75

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 274 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band4_CH1	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:14		

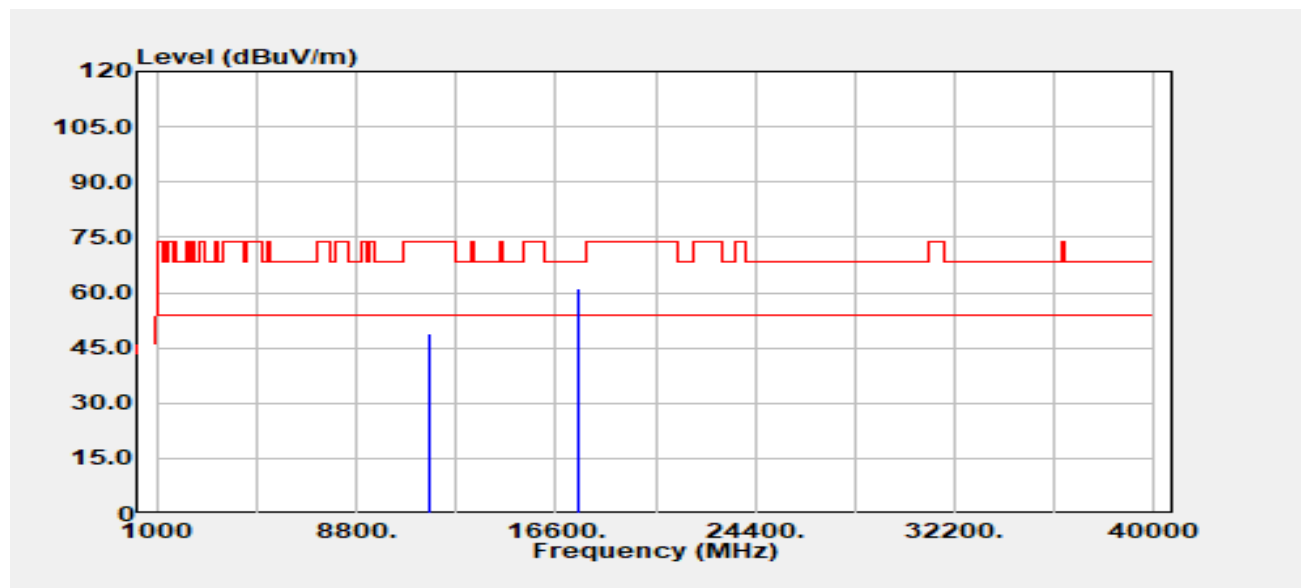


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	34.94	14.03	48.97	74.00	-25.03
11650.00	Average	28.54	14.03	42.56	54.00	-11.44
17475.00	Peak	34.13	27.18	61.32	68.20	-6.88



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 275 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11a/Band4_CH1	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:14		

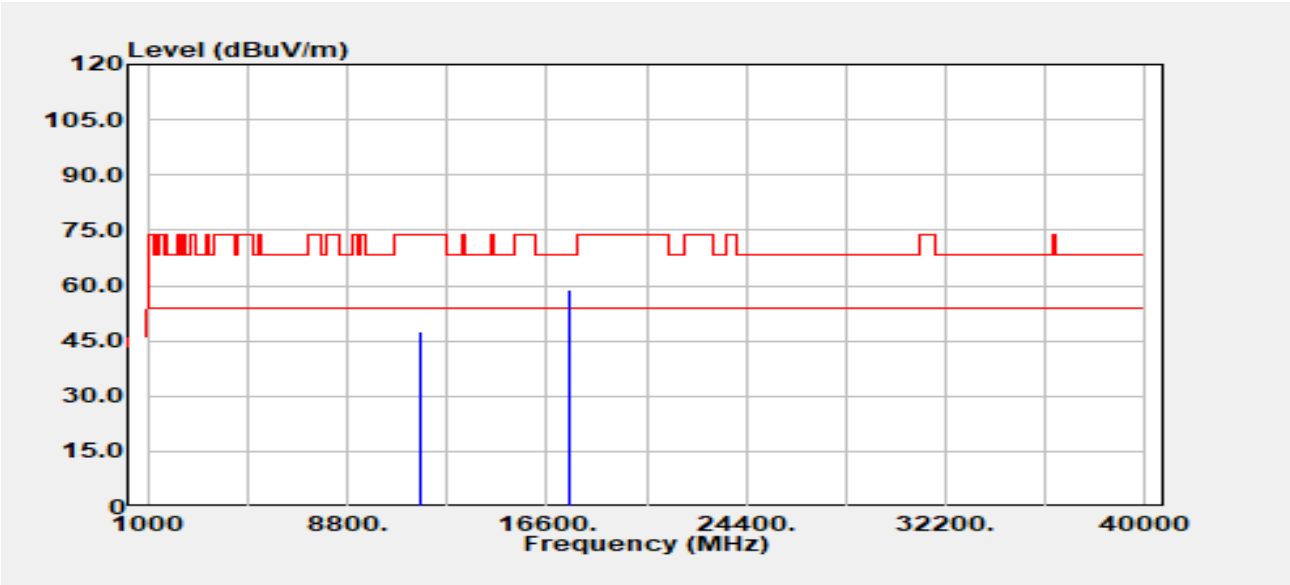


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	33.45	14.03	47.47	74.00	-26.53
11650.00	Average	28.27	14.03	42.29	54.00	-11.71
17475.00	Peak	31.74	27.18	58.92	68.20	-9.28



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 276 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:10.5		

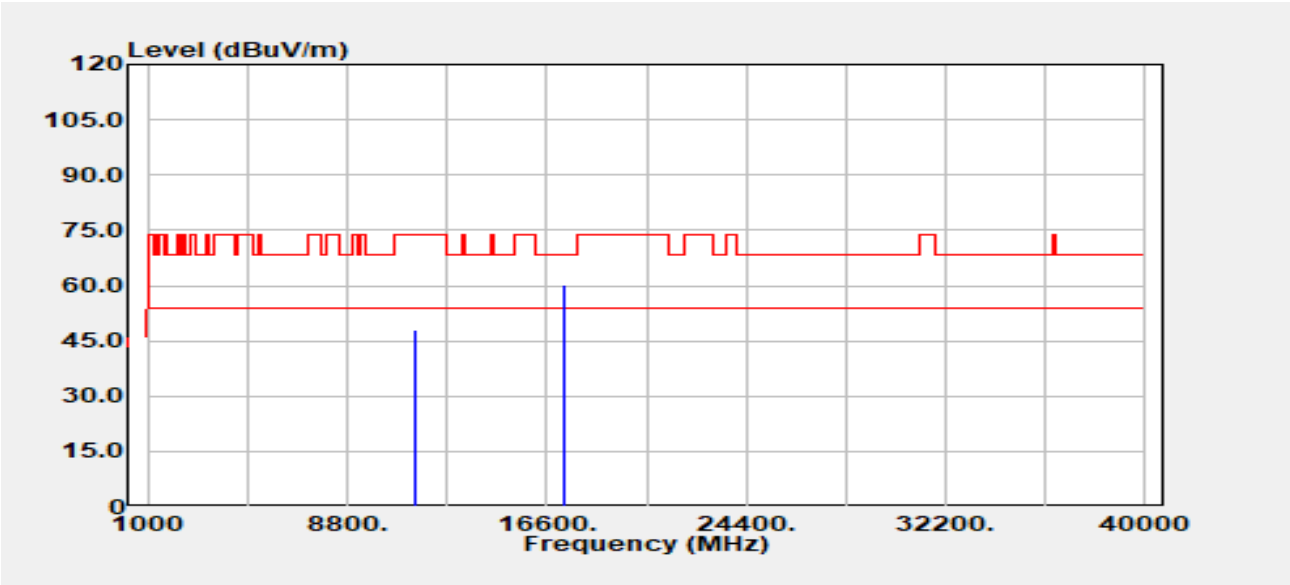


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	34.26	13.67	47.93	74.00	-26.07
11490.00	Average	30.45	13.67	44.12	54.00	-9.88
17235.00	Peak	32.23	28.05	60.28	68.20	-7.92



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 277 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:10.5		

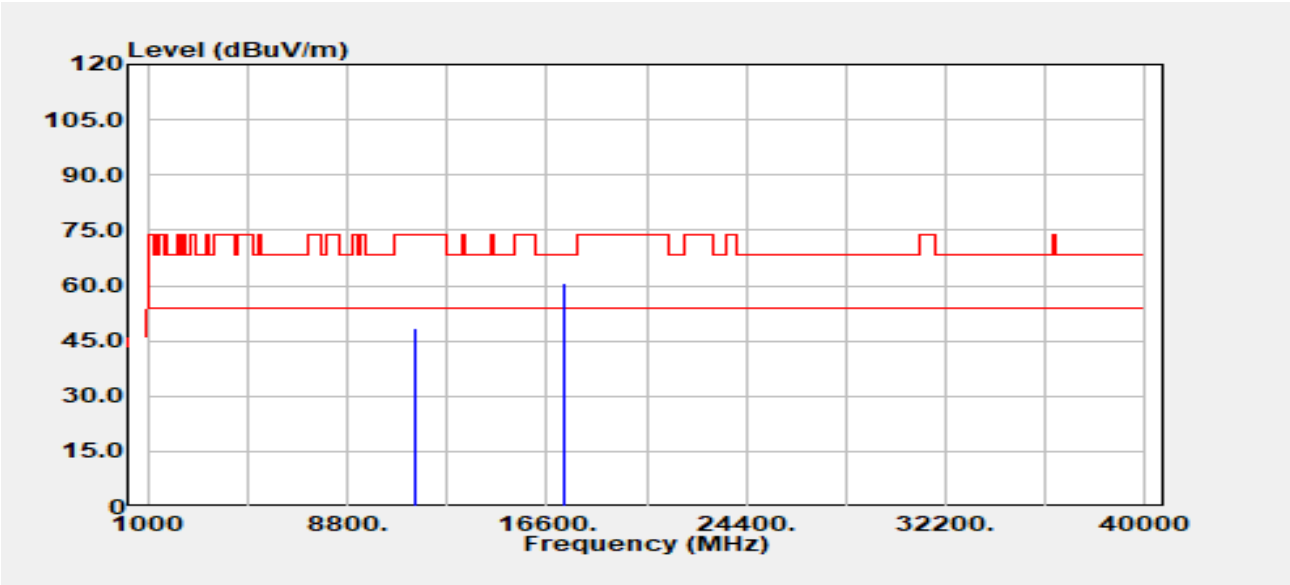


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	34.69	13.67	48.36	74.00	-25.64
11490.00	Average	28.27	13.67	41.94	54.00	-12.06
17235.00	Peak	32.57	28.05	60.62	68.20	-7.58

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 278 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :11

Test Date :2024-09-04
Temp./Humi. :24.6/57
Antenna Pol. :Vertical
Engineer :Ray Li
Test Chamber : 966A

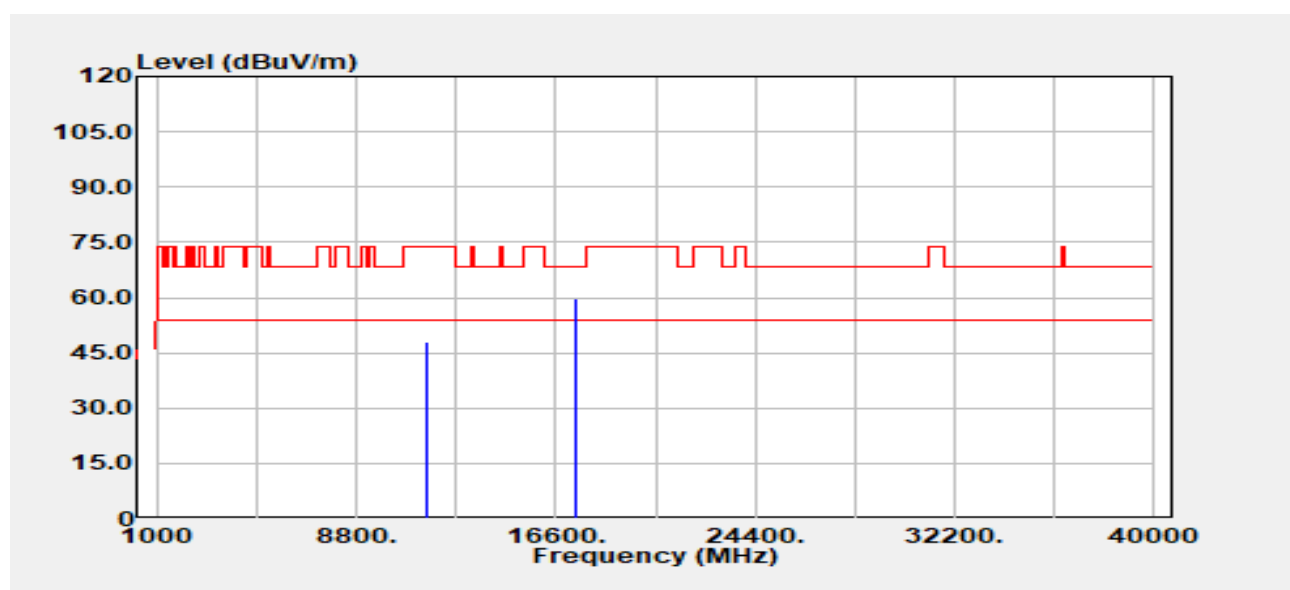


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	33.93	13.89	47.82	74.00	-26.18
11570.00	Average	31.57	13.89	45.47	54.00	-8.53
17355.00	Peak	32.60	27.33	59.93	68.20	-8.27



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 279 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

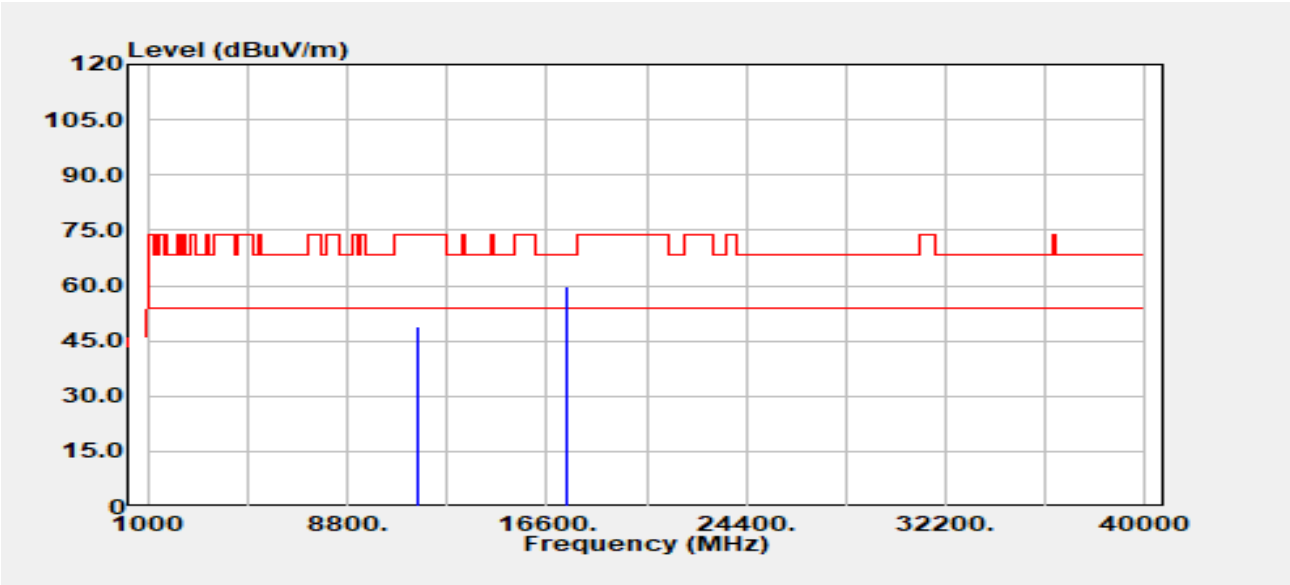


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	34.92	13.89	48.81	74.00	-25.19
11570.00	Average	29.18	13.89	43.07	54.00	-10.93
17355.00	Peak	32.65	27.33	59.98	68.20	-8.22



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 280 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n20/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

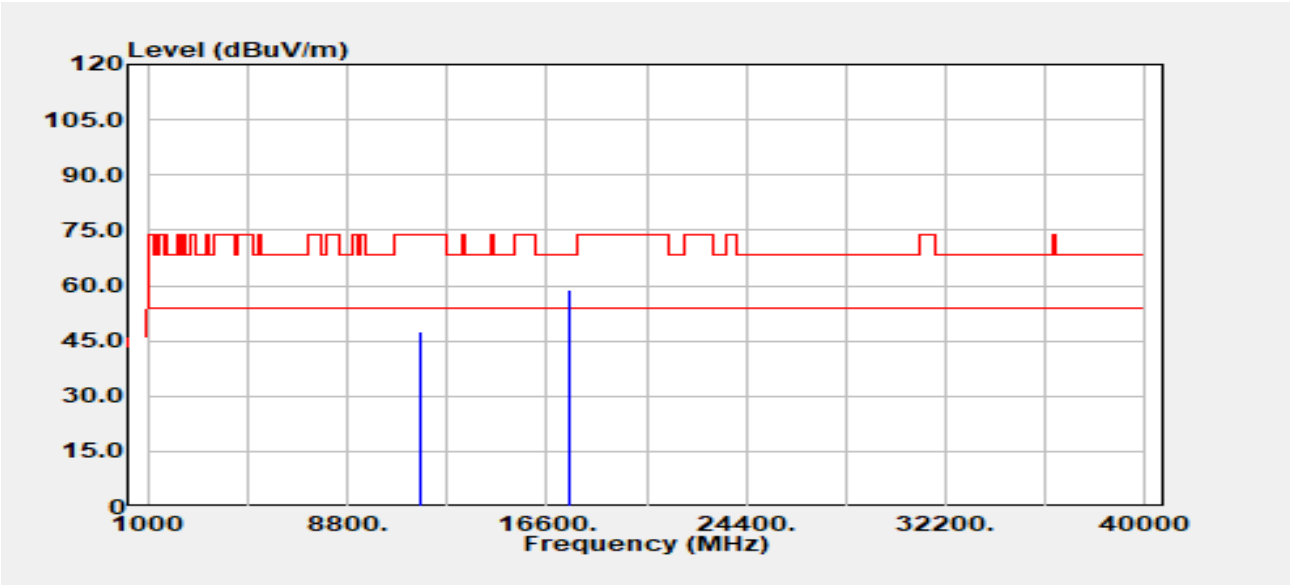


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	33.47	14.03	47.49	74.00	-26.51
11650.00	Average	32.07	14.03	46.10	54.00	-7.90
17475.00	Peak	31.88	27.18	59.06	68.20	-9.14

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 281 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :TX
EUT Pol :E2
Setting :11.5

Test Date :2024-09-04
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

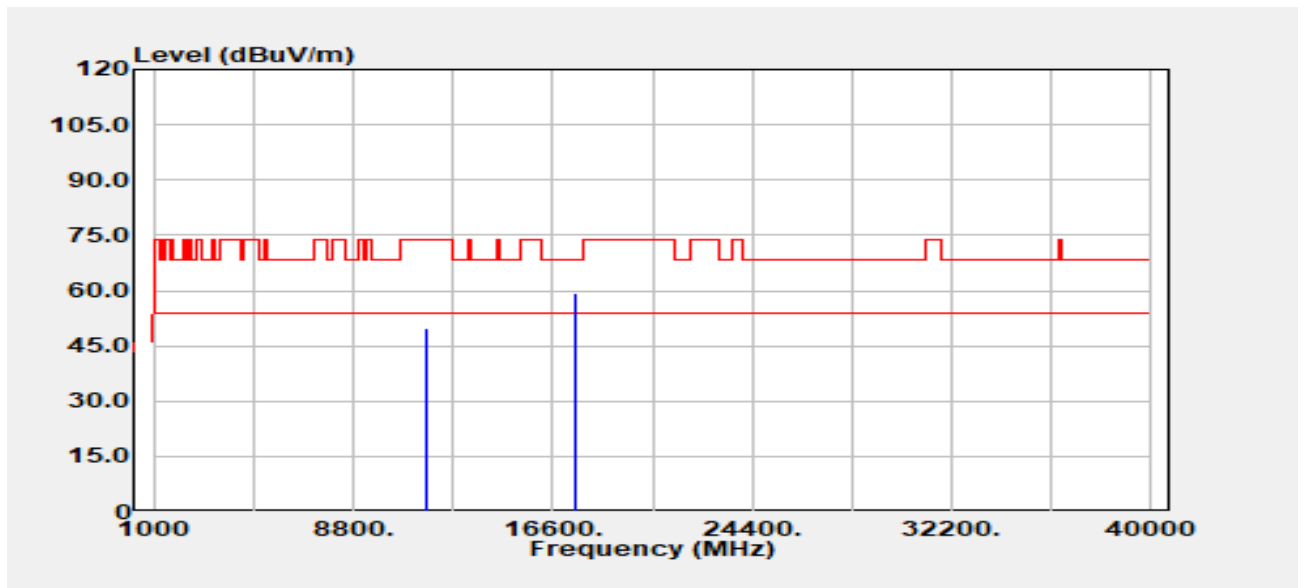


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	35.59	14.03	49.61	74.00	-24.39
11650.00	Average	29.69	14.03	43.72	54.00	-10.28
17475.00	Peak	32.26	27.18	59.45	68.20	-8.75



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 282 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band4	Temp./Humi.	:24.6/57
Frequency	:5755 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11		

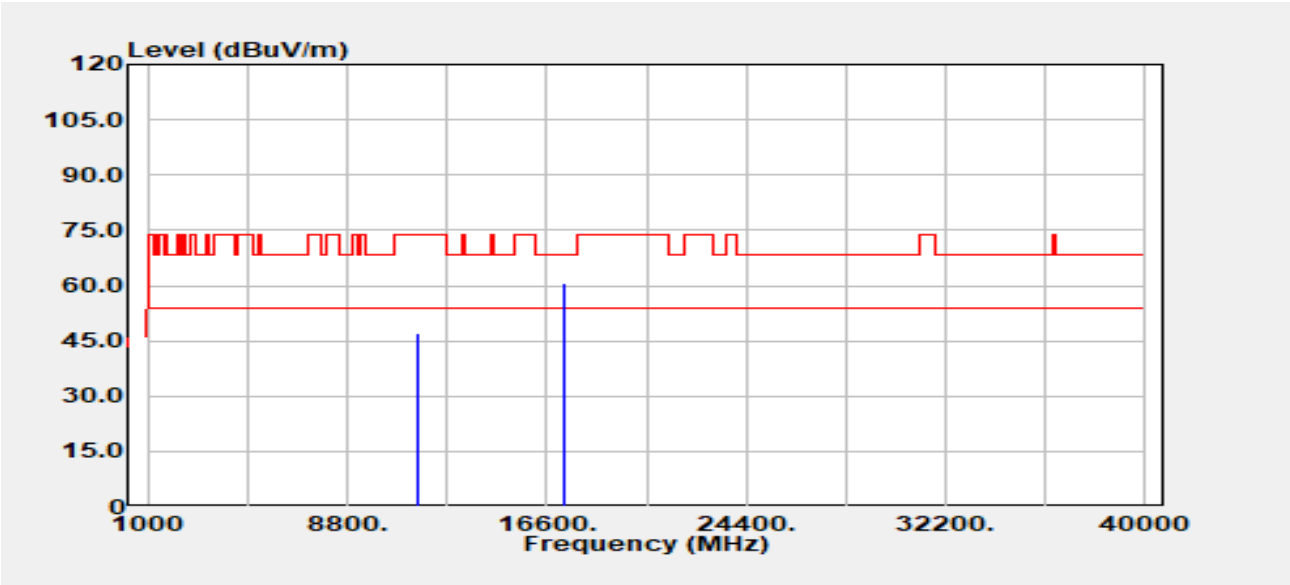


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.00	Peak	33.15	13.77	46.92	74.00	-27.08
11510.00	Average	26.24	13.77	40.01	54.00	-13.99
17265.00	Peak	32.60	27.89	60.49	68.20	-7.71

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 283 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :TX
EUT Pol :E2
Setting :11

Test Date :2024-09-04
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

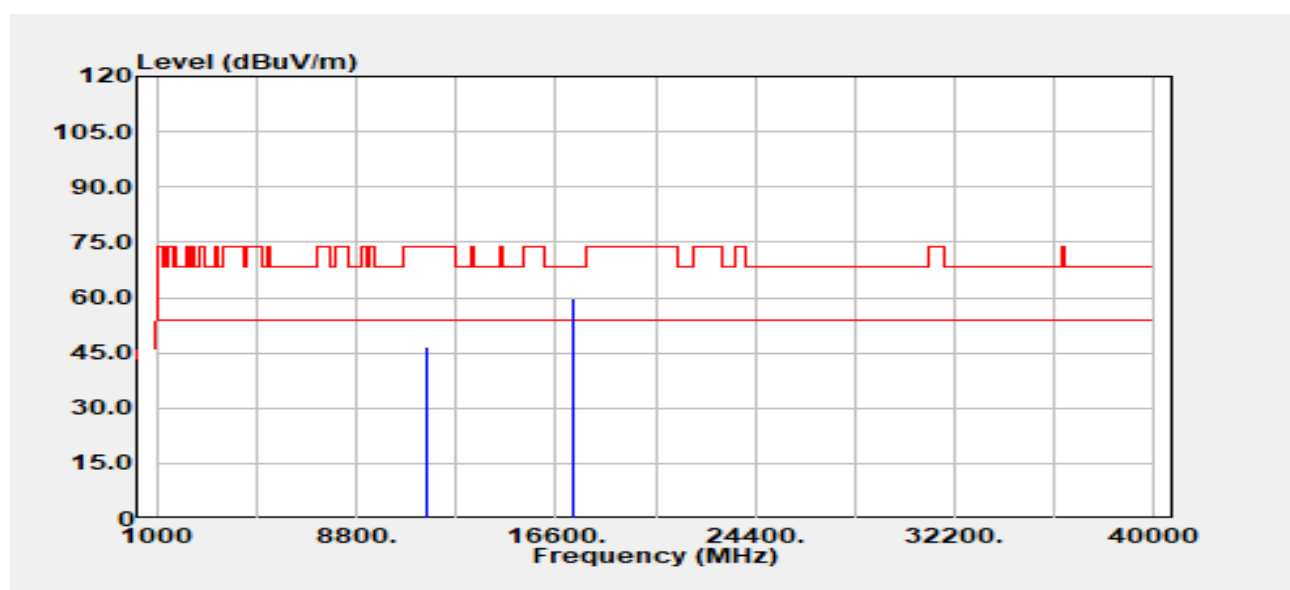


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.00	Peak	32.86	13.77	46.63	74.00	-27.37
11510.00	Average	25.78	13.77	39.55	54.00	-14.45
17265.00	Peak	32.01	27.89	59.90	68.20	-8.30



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 284 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-04
Operation Band	:802.11n40/Band4	Temp./Humi.	:24.6/57
Frequency	:5795 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

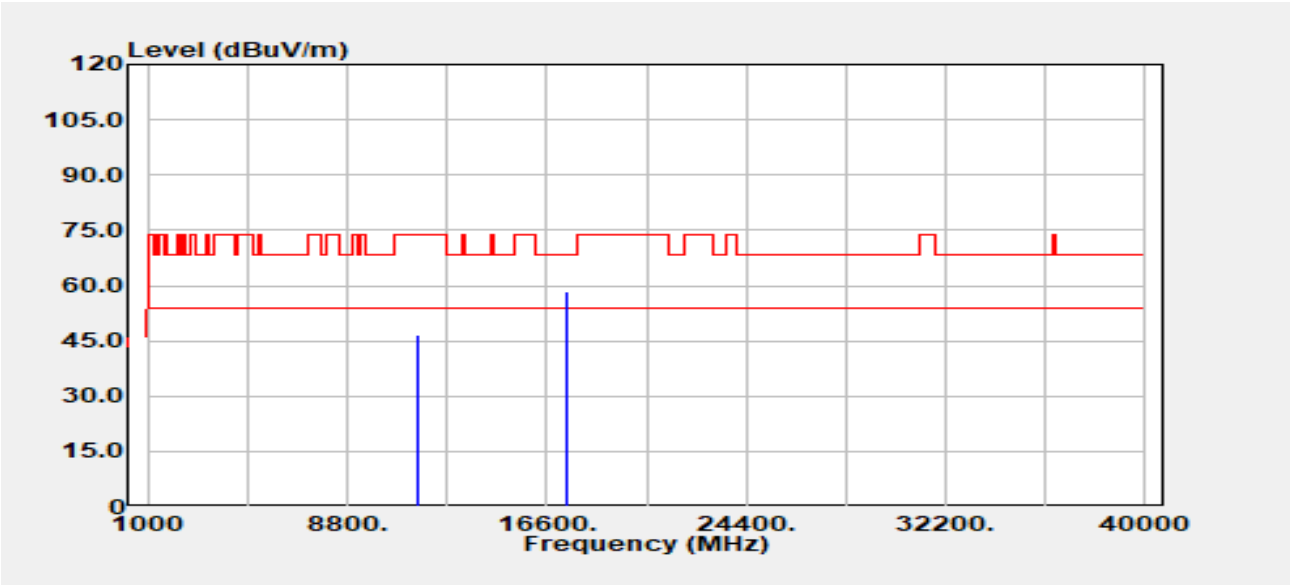


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.00	Peak	32.96	13.82	46.78	74.00	-27.22
11590.00	Average	27.27	13.82	41.09	54.00	-12.91
17385.00	Peak	31.33	27.26	58.60	68.20	-9.60

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 285 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :TX
EUT Pol :E2
Setting :13

Test Date :2024-09-04
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

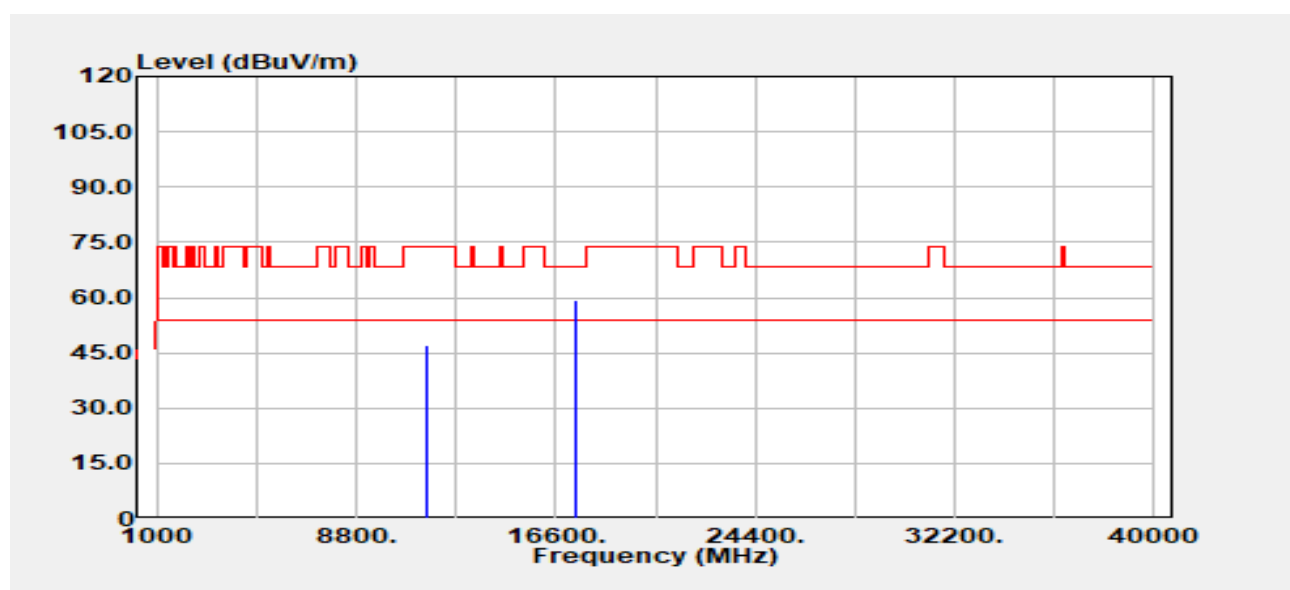


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.00	Peak	33.38	13.82	47.20	74.00	-26.80
11590.00	Average	27.28	13.82	41.10	54.00	-12.90
17385.00	Peak	32.12	27.26	59.38	68.20	-8.82



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 286 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-05
Operation Band	:802.11ac80/Band4	Temp./Humi.	:24.6/57
Frequency	:5775 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

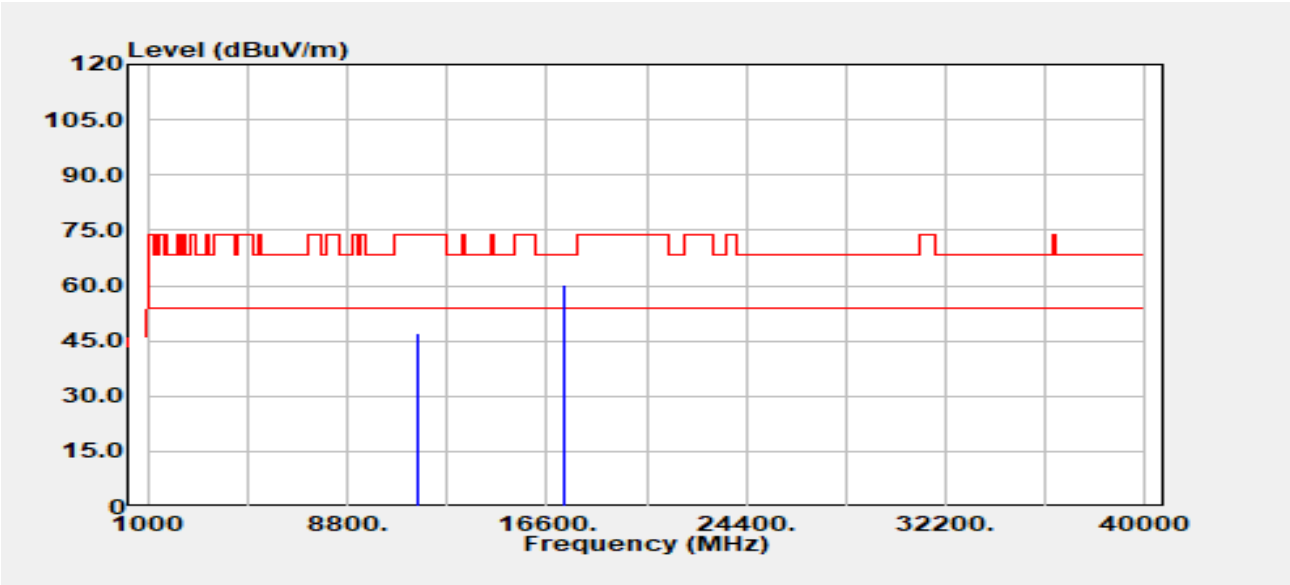


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11550.00	Peak	33.09	13.97	47.06	74.00	-26.94
11550.00	Average	26.41	13.97	40.38	54.00	-13.62
17325.00	Peak	32.74	27.42	60.17	68.20	-8.03



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 287 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-05
Operation Band	:802.11ac80/Band4	Temp./Humi.	:24.6/57
Frequency	:5775 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

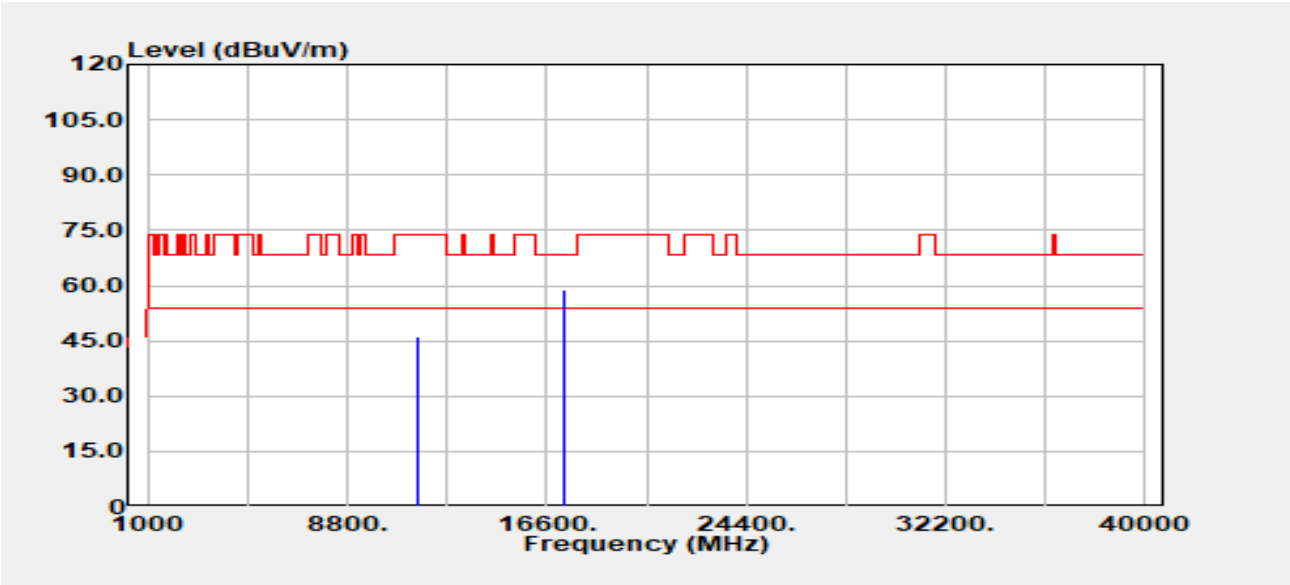


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11550.00	Peak	32.00	13.97	45.97	74.00	-28.03
11550.00	Average	25.98	13.97	39.95	54.00	-14.05
17325.00	Peak	31.59	27.42	59.01	68.20	-9.19



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 288 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax20/Band4	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

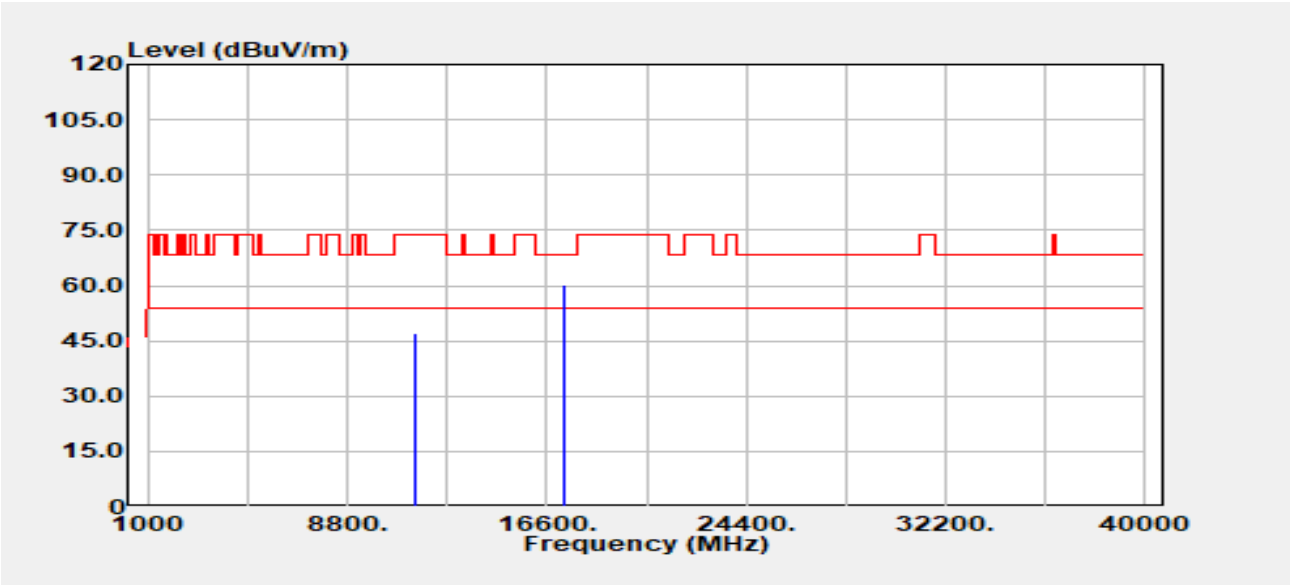


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	33.50	13.67	47.17	74.00	-26.83
11490.00	Average	28.59	13.67	42.26	54.00	-11.74
17235.00	Peak	32.35	28.05	60.40	68.20	-7.80

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 289 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band4
Frequency :5745 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

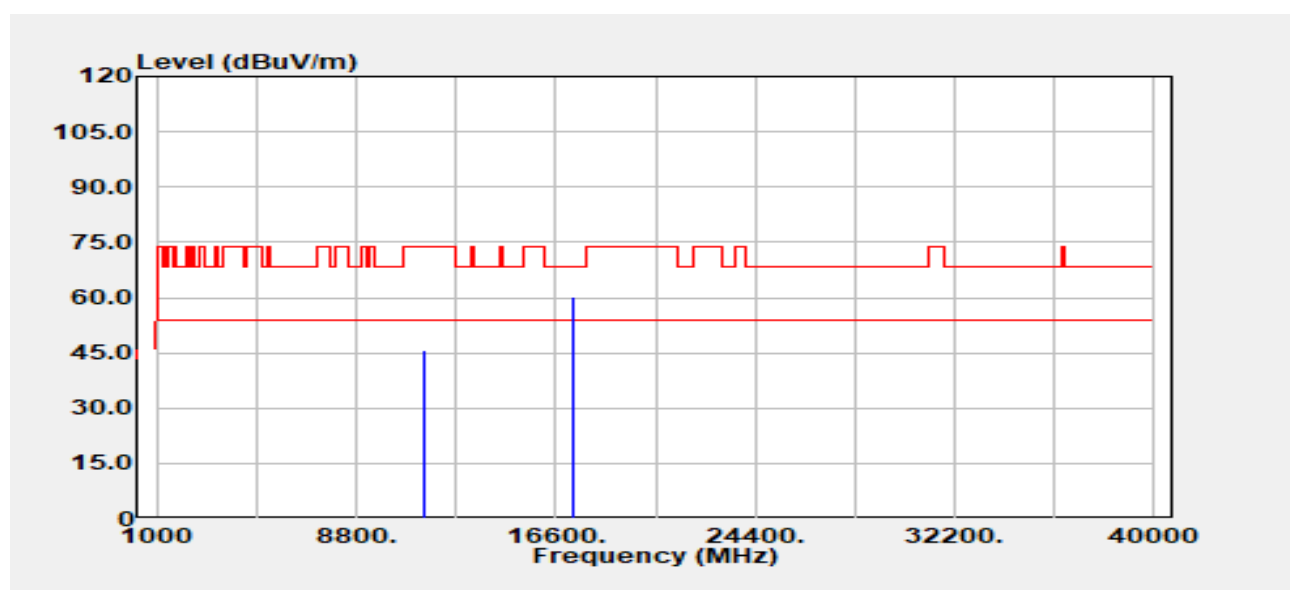


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11490.00	Peak	32.21	13.67	45.88	74.00	-28.12
11490.00	Average	28.08	13.67	41.74	54.00	-12.26
17235.00	Peak	32.30	28.05	60.35	68.20	-7.85



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 290 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax20/Band4	Temp./Humi.	:24.6/57
Frequency	:5785 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

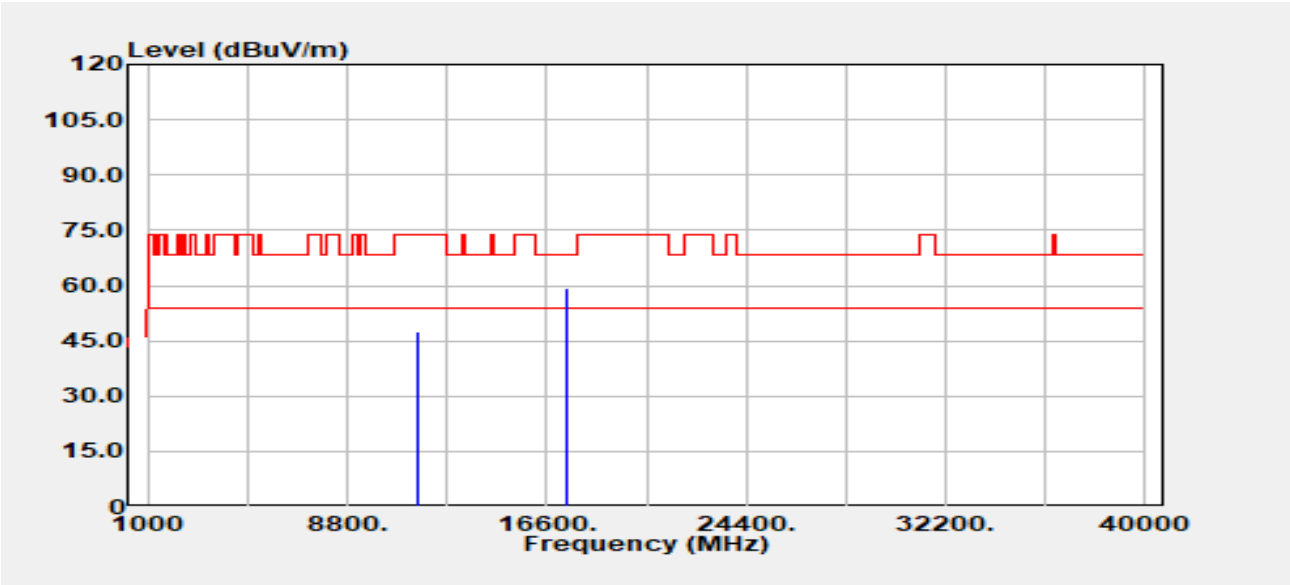


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	33.44	13.89	47.34	74.00	-26.66
11570.00	Average	29.16	13.89	43.05	54.00	-10.95
17355.00	Peak	31.77	27.33	59.10	68.20	-9.10

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 291 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band4
Frequency :5785 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :Horizontal
Engineer :Ray Li
Test Chamber : 966A

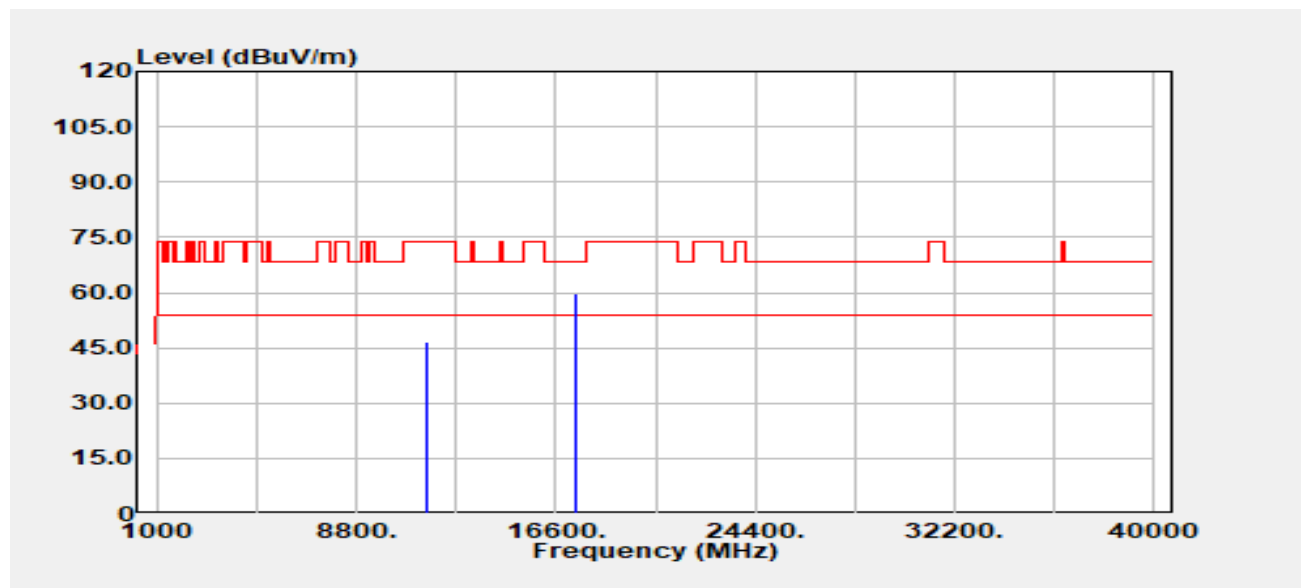


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11570.00	Peak	32.58	13.89	46.48	74.00	-27.52
11570.00	Average	28.05	13.89	41.95	54.00	-12.05
17355.00	Peak	32.45	27.33	59.78	68.20	-8.42



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 292 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax20/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

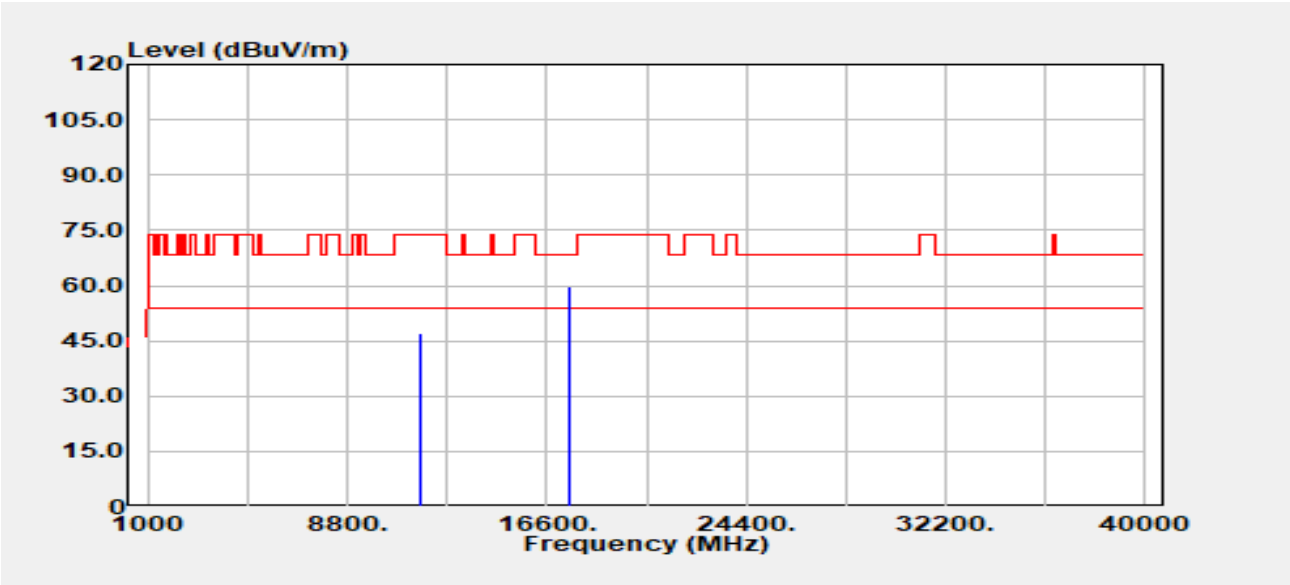


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11650.00	Peak	32.85	14.03	46.88	74.00	-27.12
11650.00	Average	28.59	14.03	42.61	54.00	-11.39
17475.00	Peak	32.71	27.18	59.89	68.20	-8.31



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 293 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax20/Band4	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

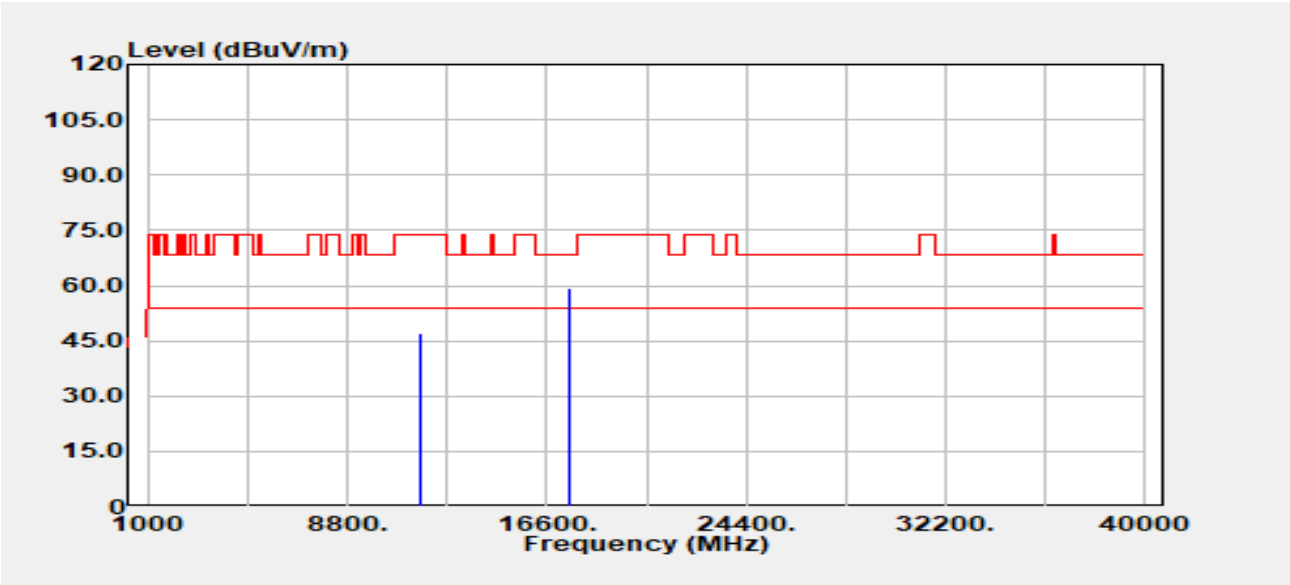


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
11650.00	Peak	33.23	14.03	47.25	74.00	-26.75
11650.00	Average	28.45	14.03	42.48	54.00	-11.52
17475.00	Peak	32.22	27.18	59.41	68.20	-8.79



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 294 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band4	Temp./Humi.	:24.6/57
Frequency	:5755 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

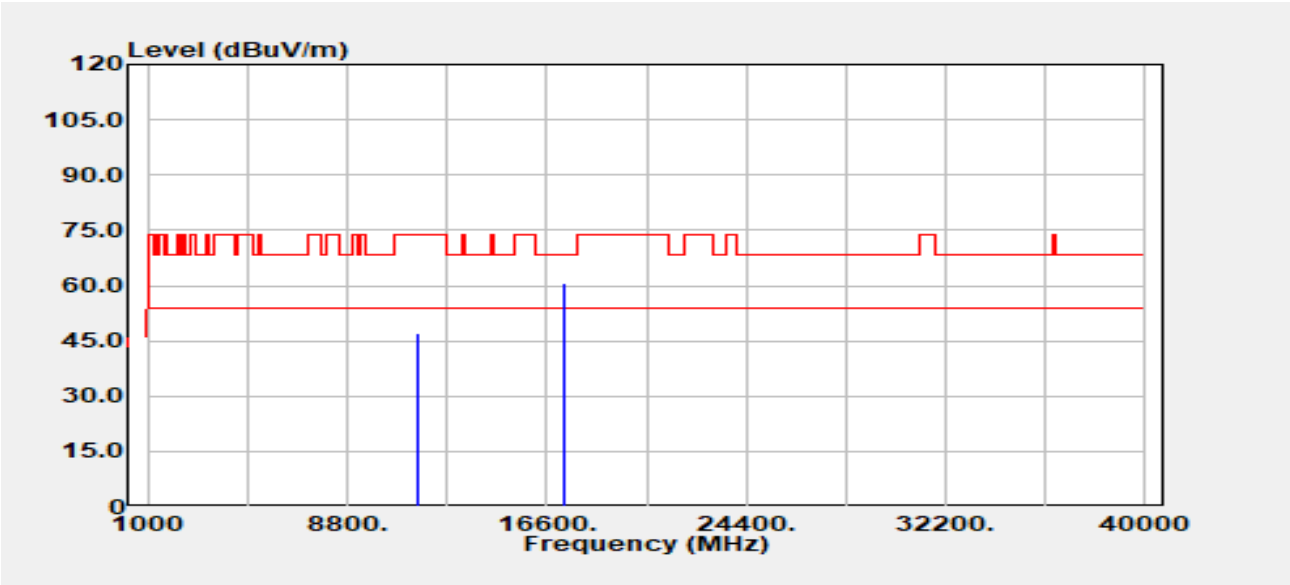


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.00	Peak	33.15	13.77	46.92	74.00	-27.08
11510.00	Average	26.17	13.77	39.94	54.00	-14.06
17265.00	Peak	32.81	27.89	60.69	68.20	-7.51



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 295 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band4	Temp./Humi.	:24.6/57
Frequency	:5755 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

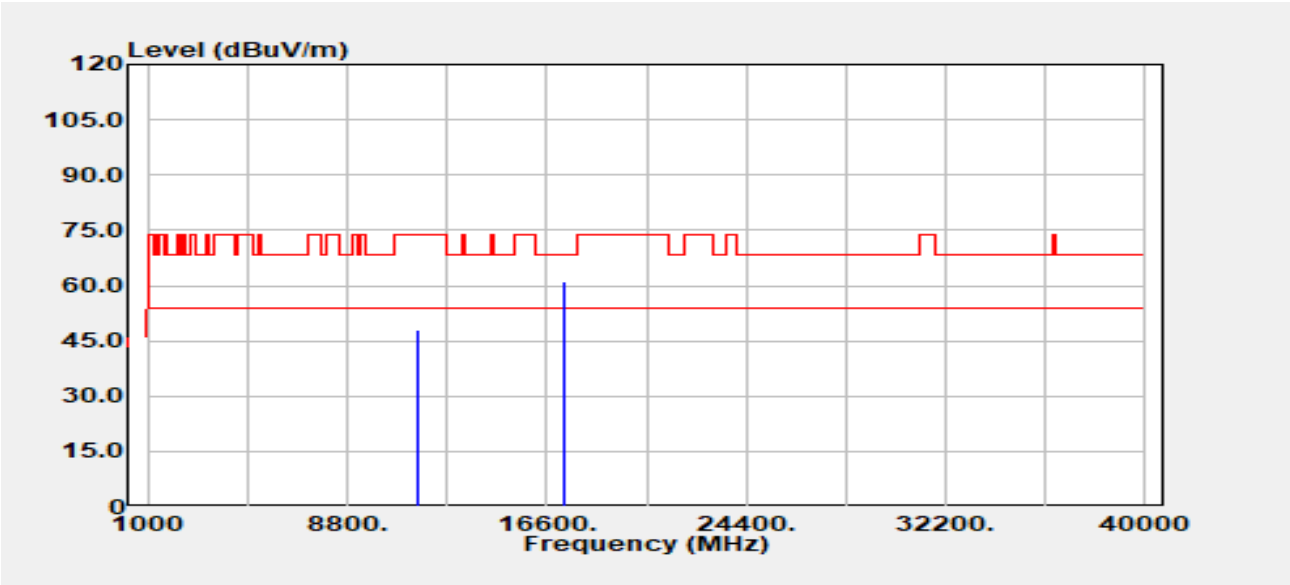


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11510.00	Peak	34.42	13.77	48.19	74.00	-25.81
11510.00	Average	26.18	13.77	39.95	54.00	-14.05
17265.00	Peak	33.39	27.89	61.28	68.20	-6.92



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 296 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band4	Temp./Humi.	:24.6/57
Frequency	:5795 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

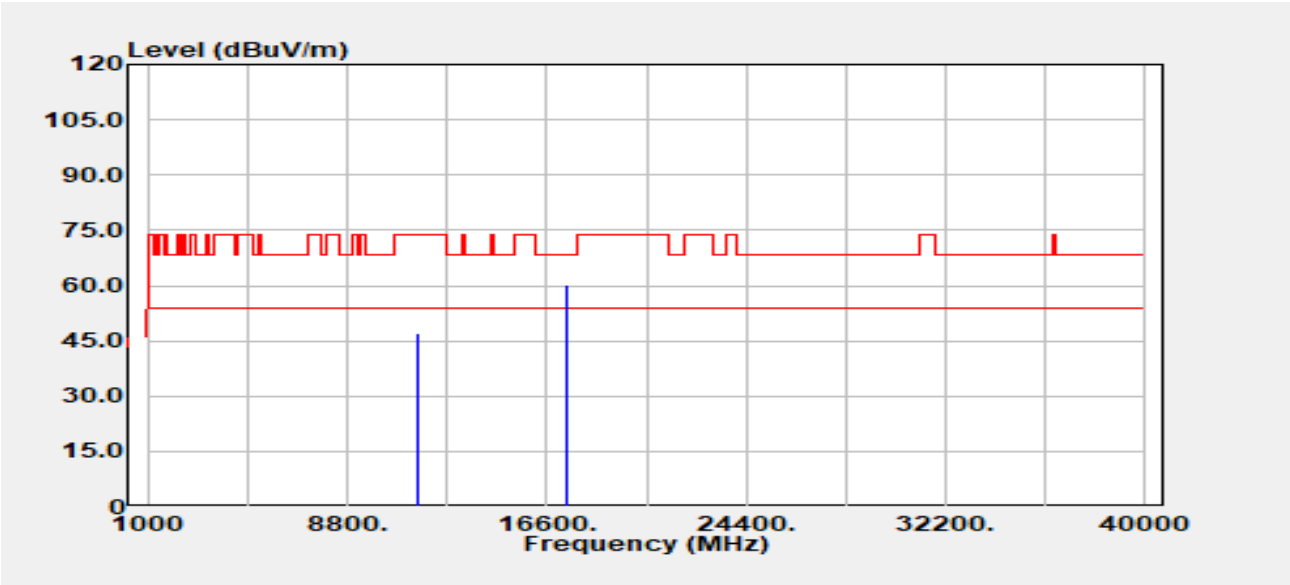


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.00	Peak	33.37	13.82	47.19	74.00	-26.81
11590.00	Average	26.68	13.82	40.50	54.00	-13.50
17385.00	Peak	32.86	27.26	60.12	68.20	-8.08



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 297 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax40/Band4	Temp./Humi.	:24.6/57
Frequency	:5795 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

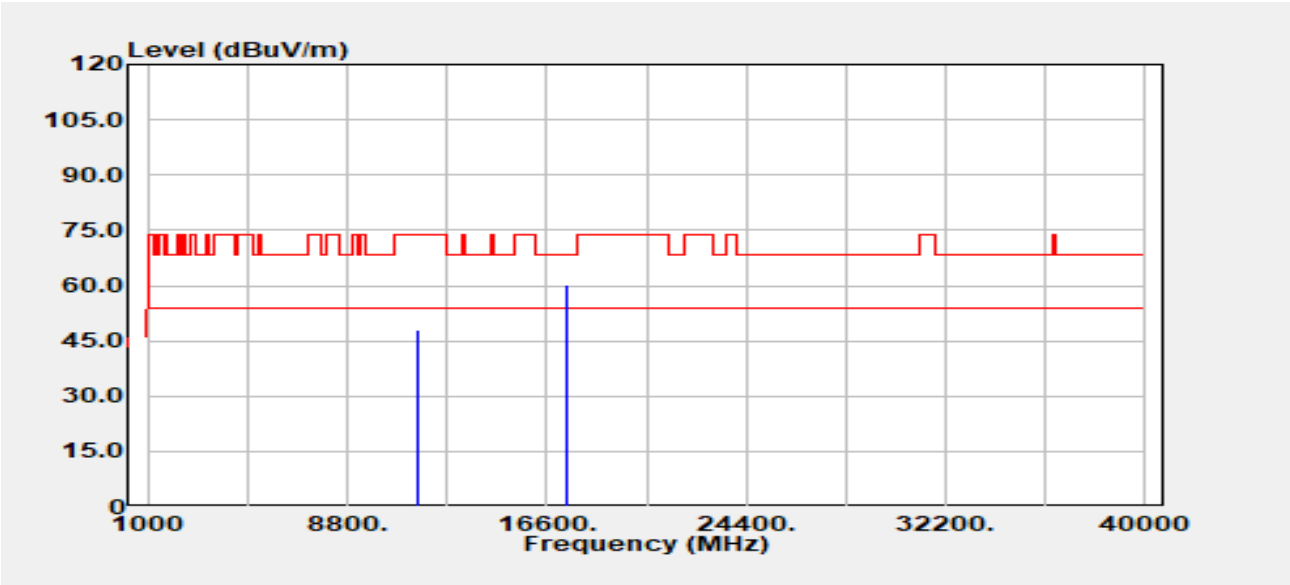


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11590.00	Peak	34.02	13.82	47.83	74.00	-26.17
11590.00	Average	25.48	13.82	39.30	54.00	-14.70
17385.00	Peak	32.97	27.26	60.23	68.20	-7.97



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 298 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-06
Operation Band	:802.11ax80/Band4	Temp./Humi.	:24.6/57
Frequency	:5775 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:11.5		

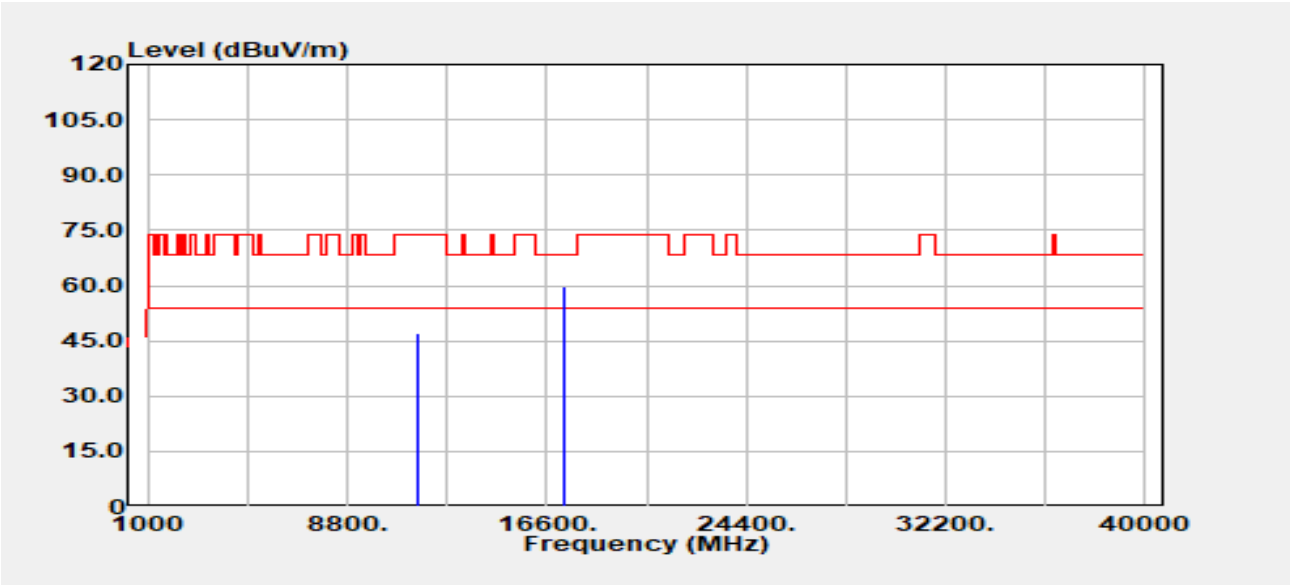


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11550.00	Peak	32.95	13.97	46.92	74.00	-27.08
11550.00	Average	26.62	13.97	40.59	54.00	-13.42
17325.00	Peak	32.25	27.42	59.67	68.20	-8.53

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 299 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax80/Band4
Frequency :5775 MHz
Operation Mode :TX
EUT Pol :E2
Setting :11.5

Test Date :2024-09-06
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

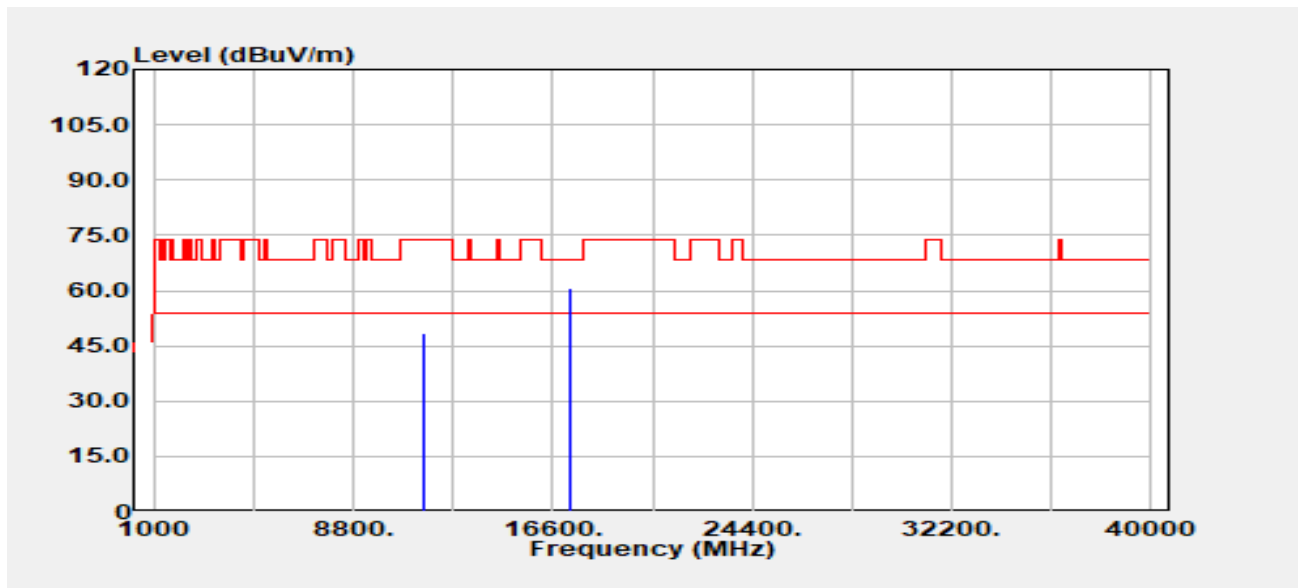

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
11550.00	Peak	34.44	13.97	48.41	74.00	-25.59
11550.00	Average	26.24	13.97	40.21	54.00	-13.79
17325.00	Peak	33.24	27.42	60.66	68.20	-7.54

- End of Test Report -