



EMC TEST REPORT

Product Name: Radio

FCC ID: 2BG9P-YX328

Trade mark: N/A

Model No.: YX328

S/N: /

Report No.: CTB25022105901E01

Applicant: Zhongshan YouXin Electronic Technology Co., Ltd.

Address: Zone D, Second Floor, Building A, NO.4 Jinkun Street, Pingnan Village, Sanxiang Town, Zhongshan City, Guangdong Province, China

Manufacturer: Zhongshan YouXin Electronic Technology Co., Ltd.

Address: Zone D, Second Floor, Building A, NO.4 Jinkun Street, Pingnan Village, Sanxiang Town, Zhongshan City, Guangdong Province, China

Prepared by: Shenzhen CTB Testing Technology Co., Ltd.

Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China

Date of Receipt: Feb. 21, 2025

Date of Test(s): Feb. 21, 2025 ~ Mar. 11, 2025

Date of Issue: Mar. 11, 2025

Test Standard(s): CFR47, FCC Part 15 Subpart B, ANSI C63.4: 2014

Test Result: Pass

In the configuration tested, the EUT complied with the standards specified above.

Compiled by:

Michael Niu

Reviewed by:

Bin Mei

Approved by:



Rita Xiao

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "★" indicates the testing items were fulfilled by subcontracted lab. "※" indicates the items are not in CNAS accreditation scope.

Table of Contents

1.	Description of version	3
2.	Test summary	4
3.	Measurement uncertainty	5
4.	General information	6
4.1.	Description of EUT	6
4.2.	Description of accessory device	6
4.3.	Test conditions	6
4.4.	Block diagram of EUT configuration	6
4.5.	Operating condition of EUT	6
5.	List of Test and Measurement Instruments	8
6.	Conducted Emission	10
6.1.	Limit	10
6.2.	Test setup	10
6.3.	EMI test receiver setup	10
6.4.	Test procedure	10
6.5.	Test results	11
7.	Radiated emissions	13
7.1.	Limit	13
7.2.	Test setup	13
7.3.	EMI test receiver setup and spectrum analyzer setup	14
7.4.	Test procedure	14
7.5.	Corrected Amplitude & Margin Calculation	14
7.6.	Test results	14
8.	Photographs of test setup	18
9.	EUT Photographs	21

1. Description of version

Report No.	Issue Date	Description	Approved
CTB25022105901E01	Mar. 11, 2025	Original	Valid

2. Test summary

Test procedures according to the technical standards:

Standard	Test Item	Test Result
§15.107	Conducted Emission	PASS
§15.109	Radiated Emission	PASS

3. Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

Test Item	Frequency	Expanded Uncertainty (U_{Lab})
Conducted Emission	150 kHz to 30 MHz	± 3.1 dB
Radiated Emission	30 MHz to 1000 MHz	± 4.1 dB
Radiated Emission	1000 MHz to 6000 MHz	± 4.8 dB

4. General information

4.1. Description of EUT

Product name	Radio
Trade mark	N/A
Model No.	YX328
Serial Model No.	N/A
Model Difference	N/A
Configuration	☒ Table-top ☐ Floor-standing
The highest frequency of the internal sources of the EUT	☐ below 1.705 MHz, the measurement shall only be made up to 30 MHz. ☒ between 1.705 MHz and 108 MHz, the measurement shall only be made up to 1 GHz. ☐ between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. ☐ between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. ☐ above 1 GHz, the measurement shall be made up to 5th harmonic of the highest frequency or 40 GHz, whichever is lower.
Ratings	DC 3.7V by battery

Note: The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or the User's Manual.


4.2. Description of accessory device

No.	Device Type	Brand	Model	Specification	Note
1	Adapter	JIYIN	JY-05100C	/	AE

4.3. Test conditions

Temperature: 15-25°C
 Relative Humidity: 30-60 %
 Atmospheric pressure: 800hPa-1060hPa

4.4. Block diagram of EUT configuration

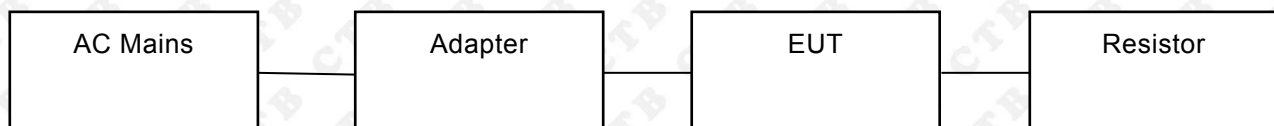

4.5. Operating condition of EUT

Operating condition	Mode 1*	FM receive mode	Test Voltage	DC 3.7V
	Mode 2	AM receive mode	Test Voltage	DC 3.7V
	Mode 3	Charging mode	Test Voltage	AC 120V

	Mode 4	USB output mode	Test Voltage	DC 3.7V
Note: This test covers all possible operating modes of the device, only the worst data are list in report. The worst data are shows (*) is the nearest standard limit which were recorded in this report.				

5. List of Test and Measurement Instruments

the test lab designation number: CN1276

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.2 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/10/25
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/10/25
10	Coaxial cable	Times	2m	/	/	2025/10/25
11	Coaxial cable	Times	2m	/	/	2025/10/25
12	Coaxial cable	Times	1m	/	/	2025/10/25
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28

15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28
----	------------------------	---------	--------	------------	---------	-----------

6. Conducted Emission

6.1. Limit

Except for Class A devices:


Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.

For Class A devices:

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	79	66
0.5-30	73	60

6.2. Test setup

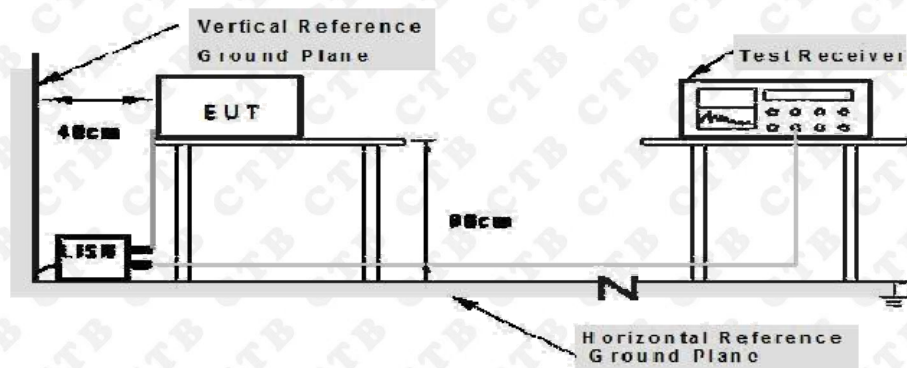

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (ANM) are 40 cm from EUT and at least 60 cm from other units and other metal planes

The setup of EUT is according with ANSI C63.4 measurement procedure. Specification used with FCC Part 15 limits.

6.3. EMI test receiver setup


Frequency Range	9kHz-30MHz
Resolution Bandwidth	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)

6.4. Test procedure

1. Measurement was performed in shielded room, and instruments used were followed clause 4 of ANSI C63.4.
2. Detailed test procedure was following clause 7 of ANSI C63.4.
3. Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

6.5. Test results

Temperature:	23℃	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Line
Test Voltage :	DC 5V	Test Mode:	Mode 1

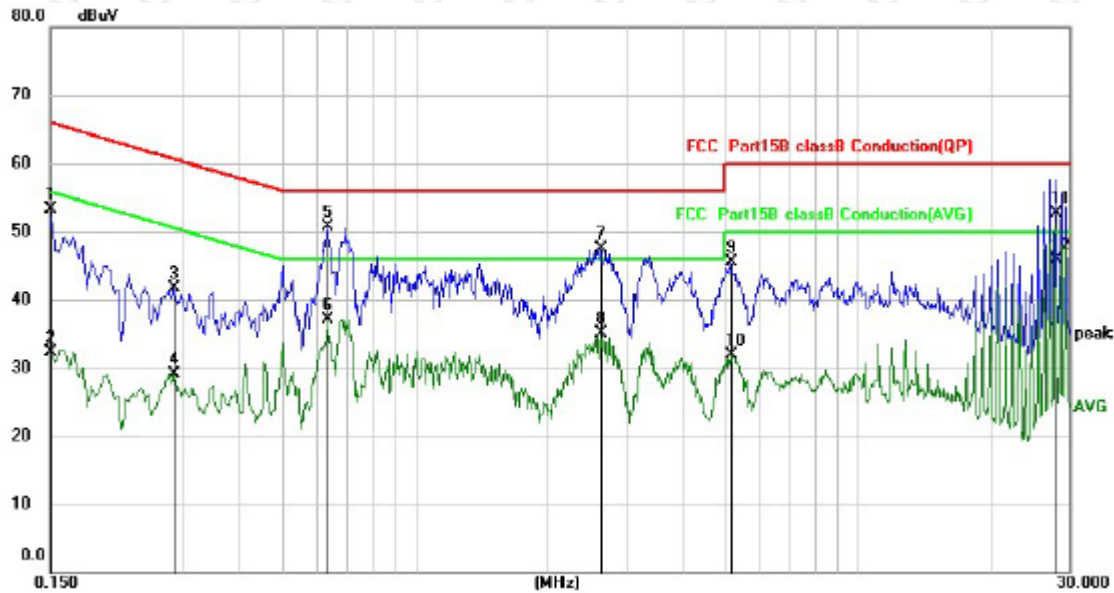


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	42.35	10.89	53.24	66.00	-12.76	QP
2		0.1500	21.33	10.89	32.22	56.00	-23.78	AVG
3		0.2860	31.09	10.65	41.74	60.64	-18.90	QP
4		0.2860	18.46	10.65	29.11	50.64	-21.53	AVG
5		0.6340	40.04	10.65	50.69	56.00	-5.31	QP
6		0.6340	26.45	10.65	37.10	46.00	-8.90	AVG
7		2.6220	35.76	11.72	47.48	56.00	-8.52	QP
8		2.6220	23.31	11.72	35.03	46.00	-10.97	AVG
9		5.1540	33.28	12.29	45.57	60.00	-14.43	QP
10		5.1540	19.69	12.29	31.98	50.00	-18.02	AVG
11		27.9660	38.46	14.30	52.76	60.00	-7.24	QP
12	*	27.9660	31.69	14.30	45.99	50.00	-4.01	AVG

Note: Result=Reading + Factor

Over Limit=Result - Limit

Temperature:	23℃	Relative Humidity:	54 %
--------------	-----	--------------------	------

Pressure:	101kPa	Phase :	Neutral
Test Voltage :	DC 5V	Test Mode:	Mode 1

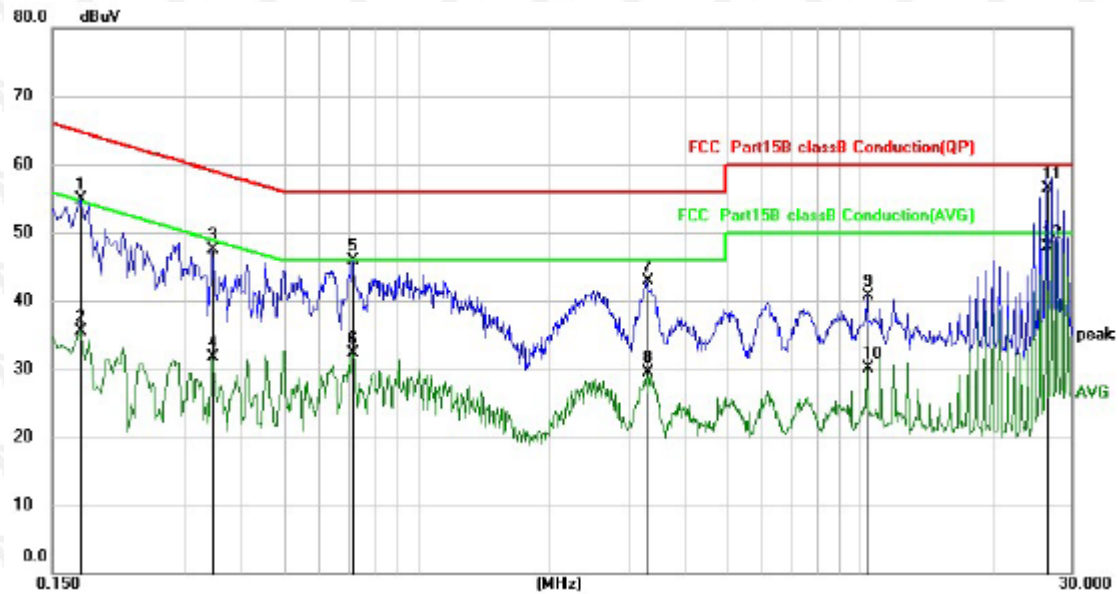

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1740	44.09	10.80	54.89	64.77	-9.88	QP
2		0.1740	24.76	10.80	35.56	54.77	-19.21	AVG
3		0.3460	36.83	10.61	47.44	59.06	-11.62	QP
4		0.3460	21.06	10.61	31.67	49.06	-17.39	AVG
5		0.7140	35.25	10.73	45.98	56.00	-10.02	QP
6		0.7140	21.53	10.73	32.26	46.00	-13.74	AVG
7		3.3060	31.00	11.87	42.87	56.00	-13.13	QP
8		3.3060	17.60	11.87	29.47	46.00	-16.53	AVG
9		10.3900	27.55	13.25	40.80	60.00	-19.20	QP
10		10.3900	16.83	13.25	30.08	50.00	-19.92	AVG
11		26.3780	42.29	14.15	56.44	60.00	-3.56	QP
12	*	26.3780	33.68	14.15	46.83	50.00	-3.17	AVG

Note: Result=Reading + Factor
Over Limit=Result – Limit

7. Radiated emissions

7.1. Limit

Except for Class A devices (at 3m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

For Class A devices (at 10m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	90	39
88-216	150	43.5
216-960	210	46.4
Above 960	300	49.5

7.2. Test setup

Radiated Emission Test Set-Up Frequency Below 1 GHz

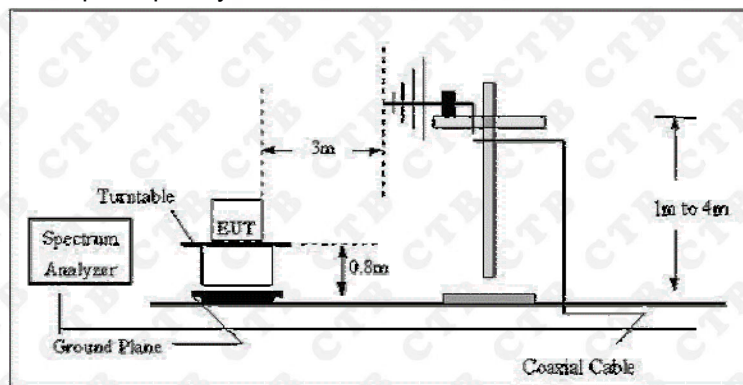

Radiated Emission Test Set-Up Frequency Above 1GHz

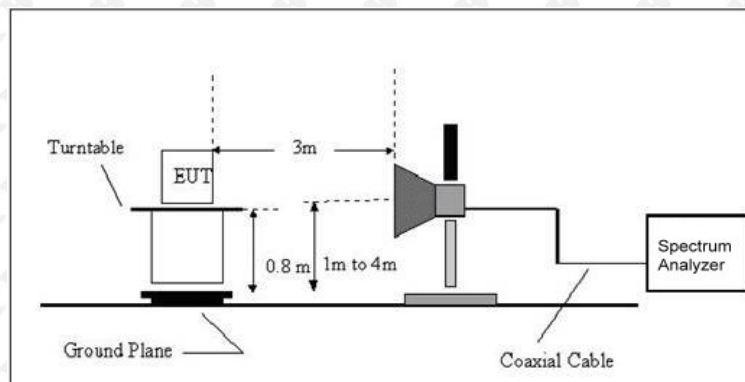

The radiated tests were performed in 3 meter Chamber test site, using the setup accordance with the ANSI C63.4:2014.

7.3. EMI test receiver setup and spectrum analyzer setup

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz-1000MHz	100kHz	300kHz	120kHz	QP
Above 1GHz	1MHz	3MHz	/	PK
	1MHz	10Hz	/	AVG

7.4. Test procedure

1. The measurement was performed in a semi-anechoic chamber, and instruments used were followed clause 4 of ANSI C63.4
2. Detailed test procedure was following clause 8 of ANSI C63.4.

7.5. Corrected Amplitude & Margin Calculation

1. The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$


2. The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

7.6. Test results

Below 1GHz Test Results:

Temperature:	23℃	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 5V	Test Mode:	Mode 1

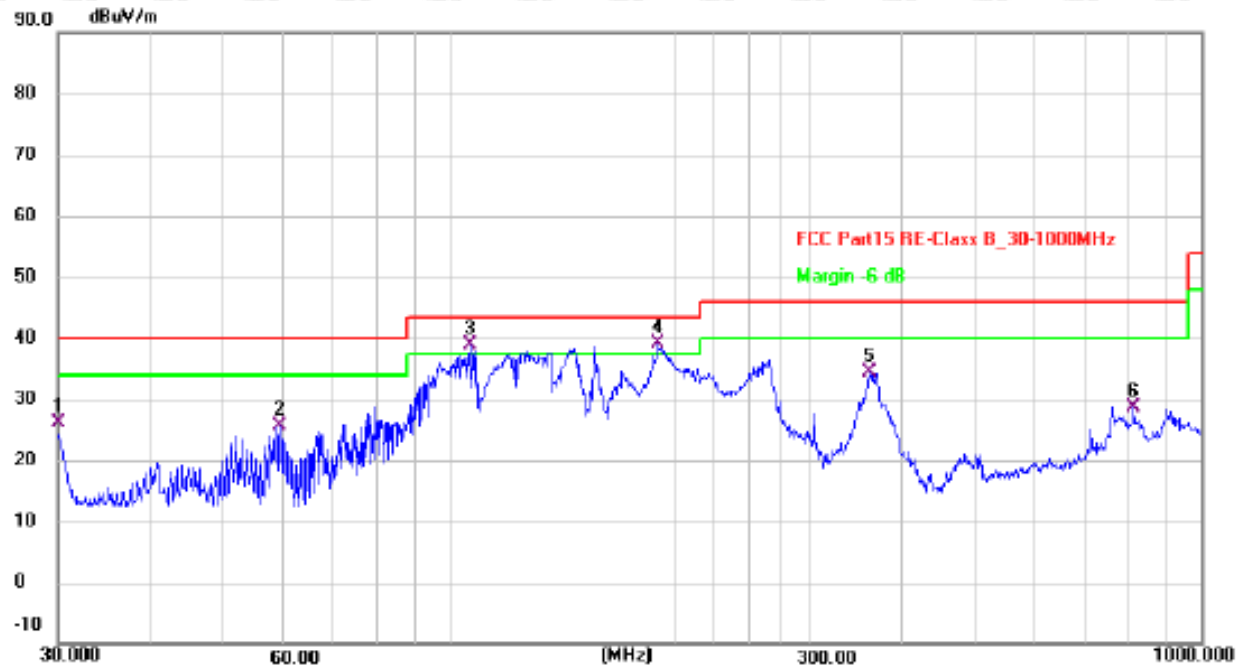


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	30.0000	39.08	-12.93	26.15	40.00	-13.85	QP
2	59.2323	40.15	-14.64	25.51	40.00	-14.49	QP
3 !	106.3850	56.21	-17.44	38.77	43.50	-4.73	QP
4 *	189.0740	56.01	-16.87	39.14	43.50	-4.36	QP
5	361.7137	47.33	-12.94	34.39	46.00	-11.61	QP
6	813.1114	31.05	-2.40	28.65	46.00	-17.35	QP

Note: Result=Reading+Factor

Over Limit=Result-Limit


Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	DC 5V	Test Mode:	Mode 1

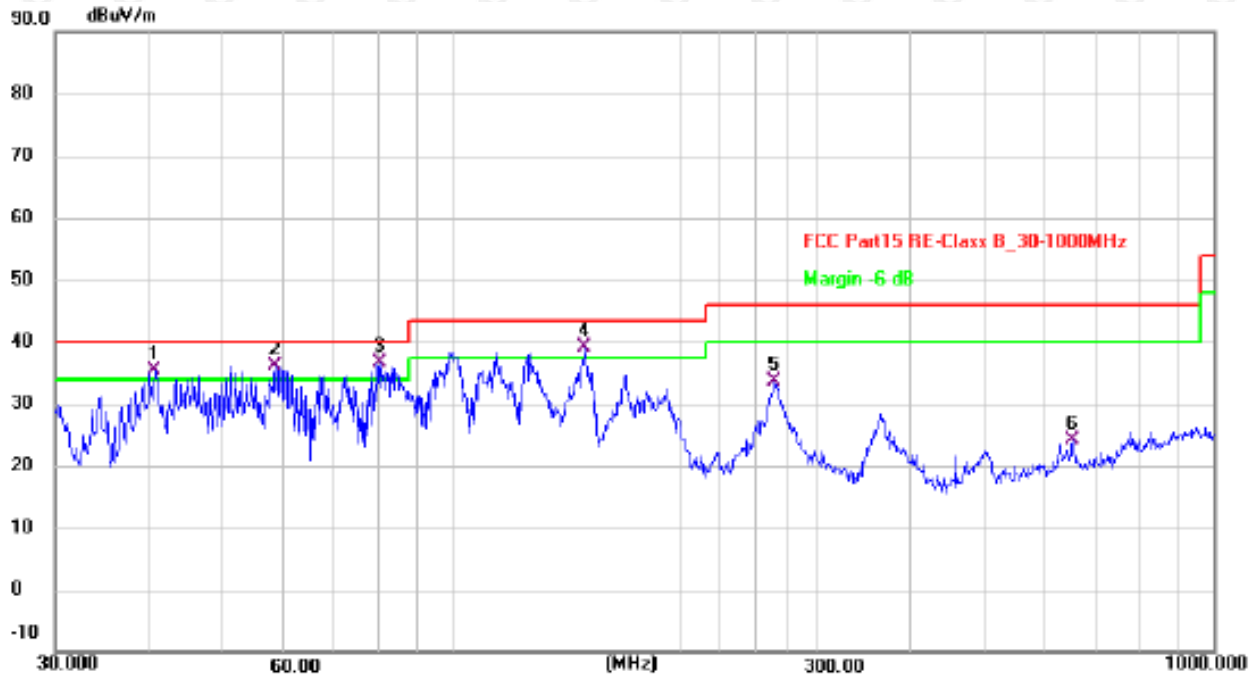

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	40.7014	48.20	-12.74	35.46	40.00	-4.54	QP
2 !	58.4074	50.88	-14.64	36.24	40.00	-3.76	QP
3 *	80.0805	54.93	-18.39	36.54	40.00	-3.46	QP
4 !	148.9624	52.27	-13.25	39.02	43.50	-4.48	QP
5	264.7456	49.13	-15.62	33.51	46.00	-12.49	QP
6	651.9415	30.07	-5.93	24.14	46.00	-21.86	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit


Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	DC 5V	Test Mode:	Mode 1

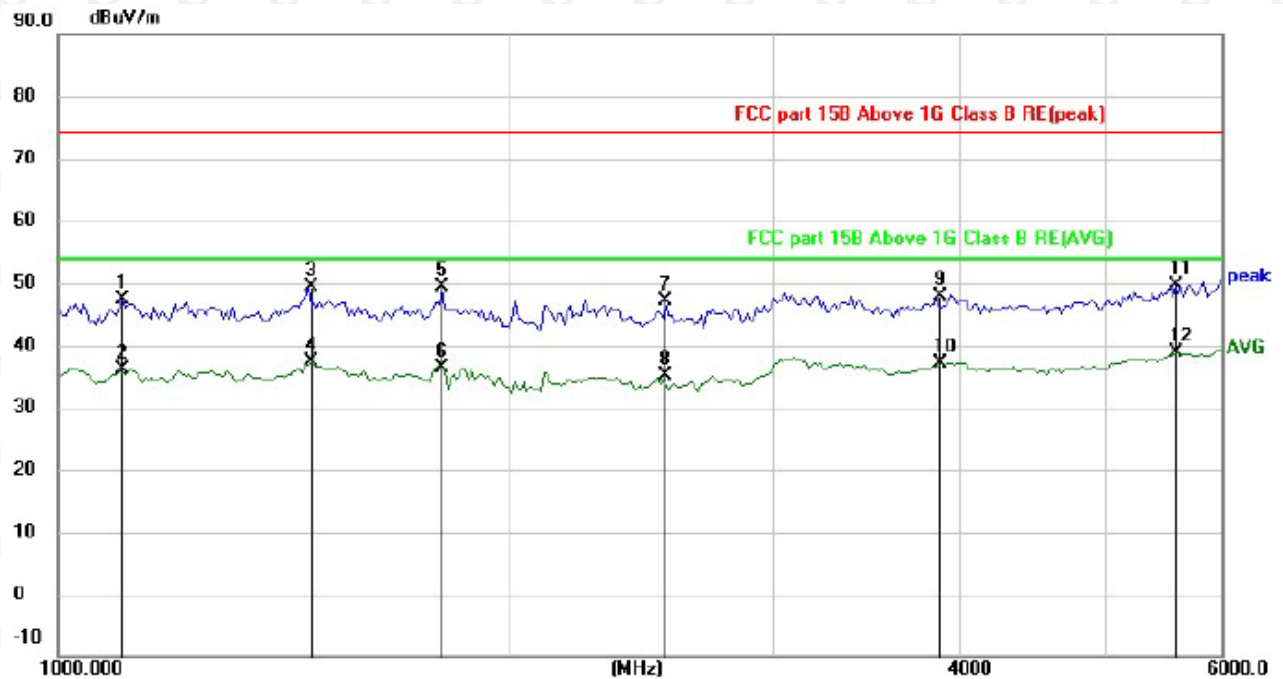

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1103.566	54.01	-6.64	47.37	74.00	-26.63	peak
2		1103.566	42.70	-6.64	36.06	54.00	-17.94	AVG
3		1469.950	55.71	-6.21	49.50	74.00	-24.50	peak
4		1469.950	43.61	-6.21	37.40	54.00	-16.60	AVG
5		1806.300	52.06	-2.79	49.27	74.00	-24.73	peak
6		1806.300	39.23	-2.79	36.44	54.00	-17.56	AVG
7		2550.257	45.34	1.90	47.24	74.00	-26.76	peak
8		2550.257	33.26	1.90	35.16	54.00	-18.84	AVG
9		3868.158	40.59	7.35	47.94	74.00	-26.06	peak
10		3868.158	29.87	7.35	37.22	54.00	-16.78	AVG
11		5585.026	36.57	13.13	49.70	74.00	-24.30	peak
12	*	5585.026	25.66	13.13	38.79	54.00	-15.21	AVG

Temperature:	23°C	Relative Humidity:	54 %
--------------	------	--------------------	------

Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	DC 5V	Test Mode:	Mode 1

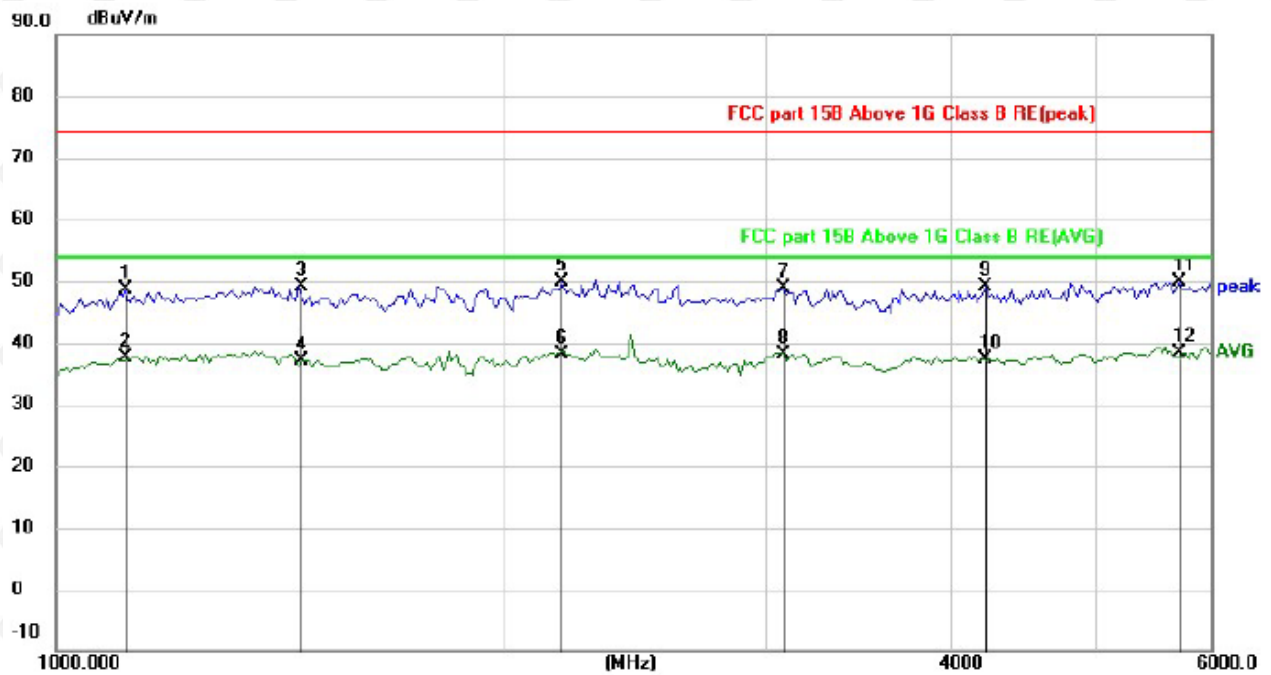


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		1113.497	55.28	-6.63	48.65	74.00	-25.35	peak
2		1113.497	44.19	-6.63	37.56	54.00	-16.44	AVG
3		1456.840	55.41	-6.22	49.19	74.00	-24.81	peak
4		1456.840	43.36	-6.22	37.14	54.00	-16.86	AVG
5		2189.985	49.52	0.24	49.76	74.00	-24.24	peak
6		2189.985	37.94	0.24	38.18	54.00	-15.82	AVG
7		3091.970	44.52	4.33	48.85	74.00	-25.15	peak
8		3091.970	33.90	4.33	38.23	54.00	-15.77	AVG
9		4230.695	40.48	8.71	49.19	74.00	-24.81	peak
10		4230.695	28.67	8.71	37.38	54.00	-16.62	AVG
11		5711.525	36.45	13.48	49.93	74.00	-24.07	peak
12	*	5711.525	24.90	13.48	38.38	54.00	-15.62	AVG

8. Photographs of test setup

RE

Below 1GHz

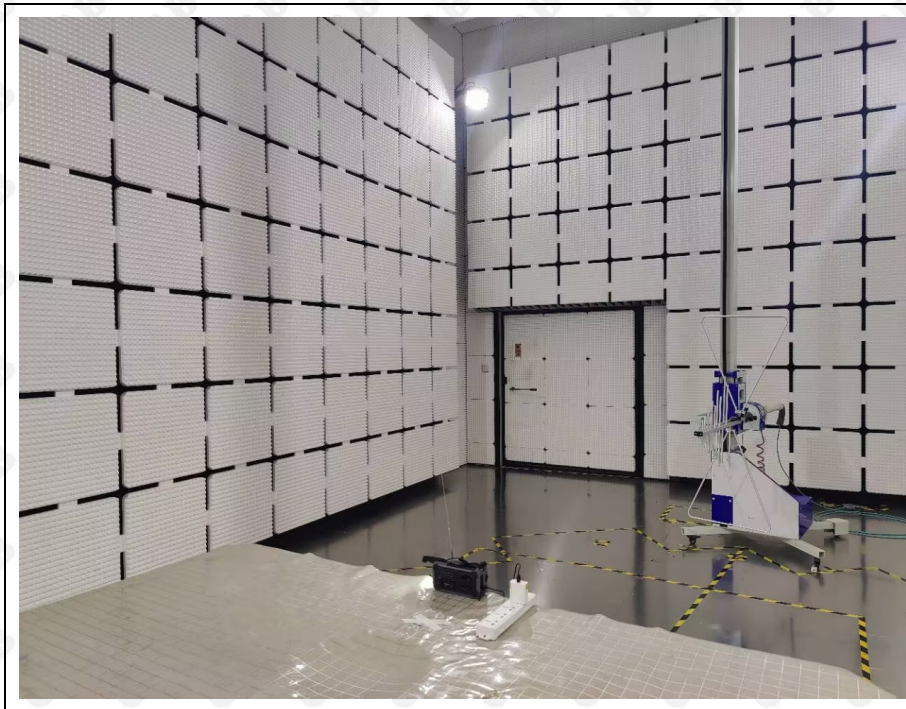

Above 1 GHz



CE



9. EUT Photographs

External Photos

EUT Photo 1



EUT Photo 2




EUT photo 3



EUT photo 4




EUT photo 5

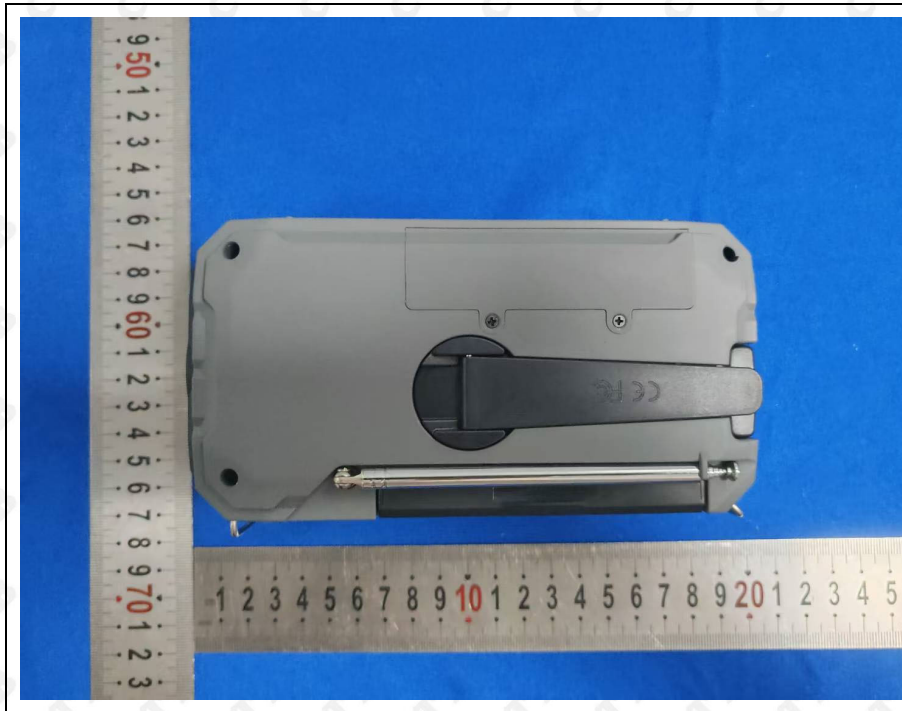


EUT photo 6



EUT photo 7

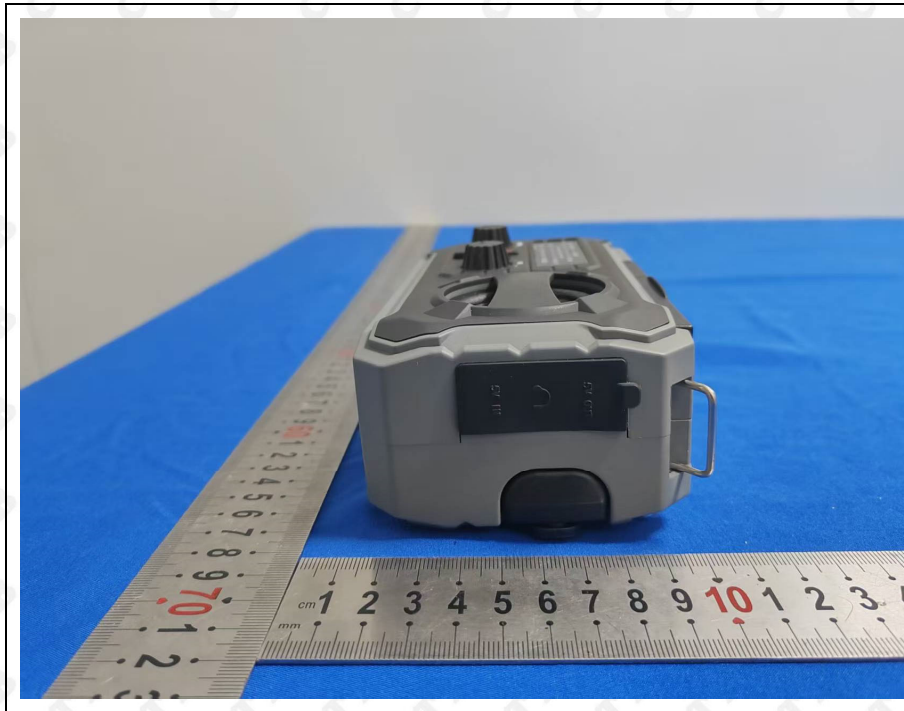


EUT photo 8

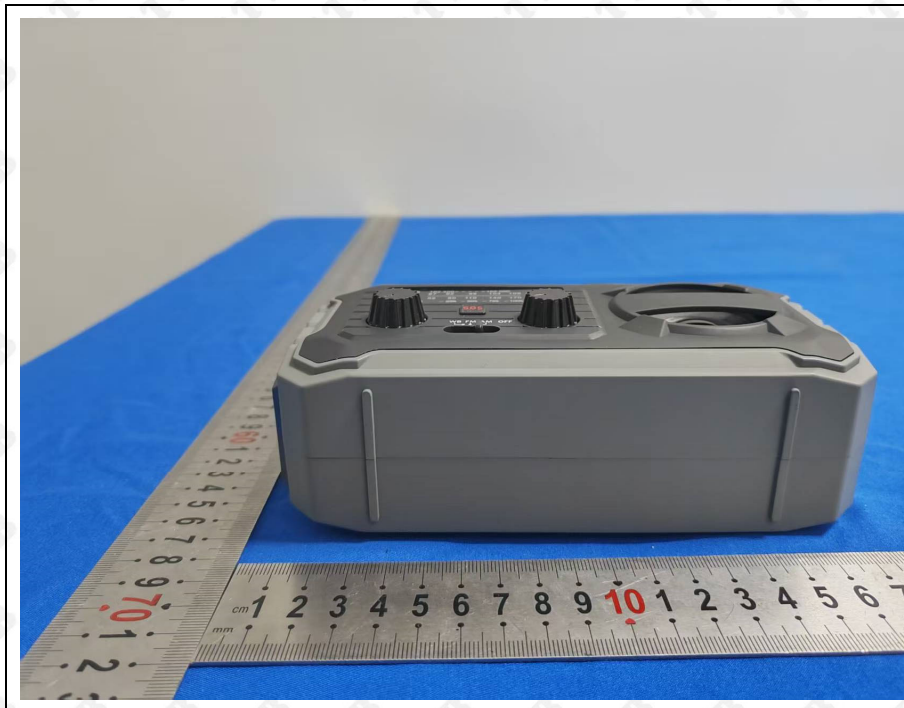

EUT photo 9



EUT photo 10

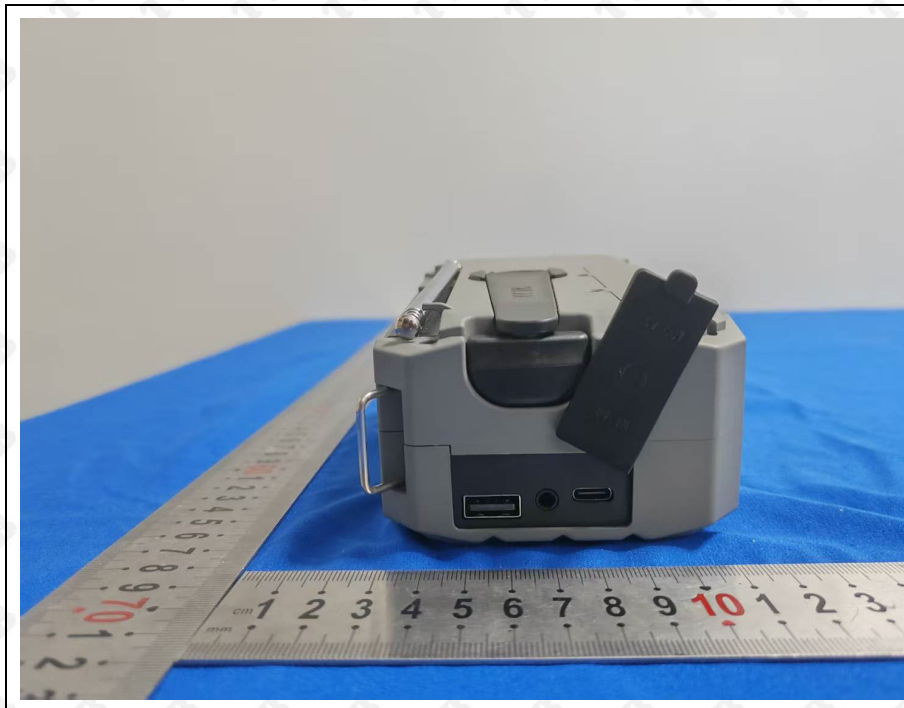

EUT photo 11



EUT photo 12



EUT photo 13



EUT photo 14



EUT photo 15



EUT photo 16



EUT photo 17



EUT photo 18



End of report