

Appendix A(Radiated Spurious Emissions Above 1GHz Test Result)

Test Result

Environmental Conditions


Temperature:	24.2 to 24.7 °C
Relative Humidity:	54 to 55 %
ATM Pressure:	100.1 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-07-11 to 2025-07-25
EUT Operation Mode:	Transmitting

Test Result: Compliance, please refer to the below data.

Note: For 18GHz-40GHz, the maximum output power mode and channel: 802.11ac20 5745MHz was tested.

For Band1:


802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

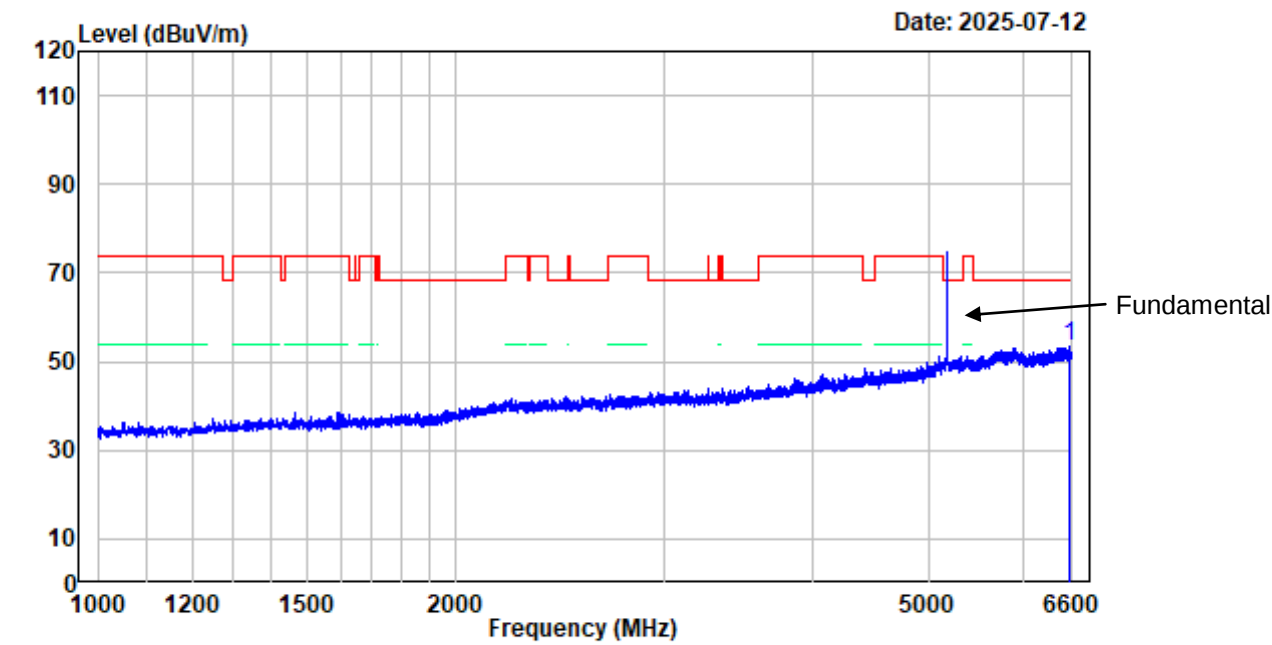

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6572.000	-3.64	57.26	53.62	68.20	-14.58	Peak


802.11A Low Channel 1GHz-6.6GHz_VERTICAL

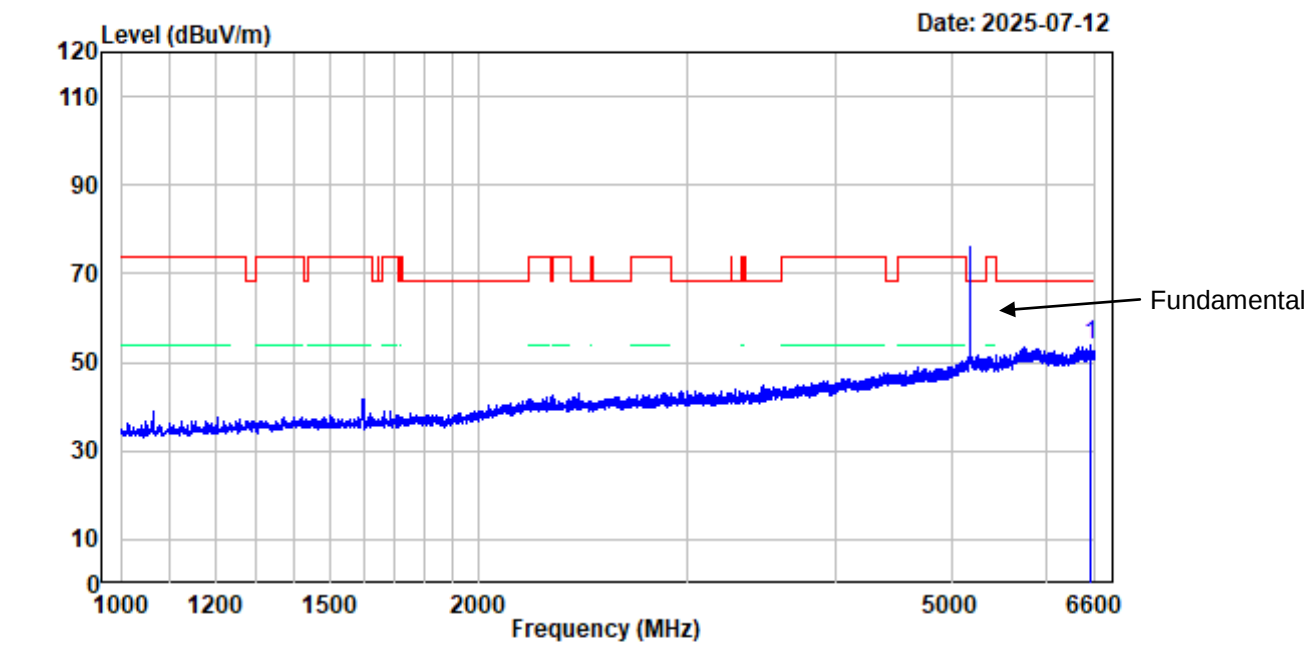

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6539.100	-3.74	57.59	53.85	68.20	-14.35 Peak


802.11A Low Channel 6.6GHz-18GHz_HORIZONTAL

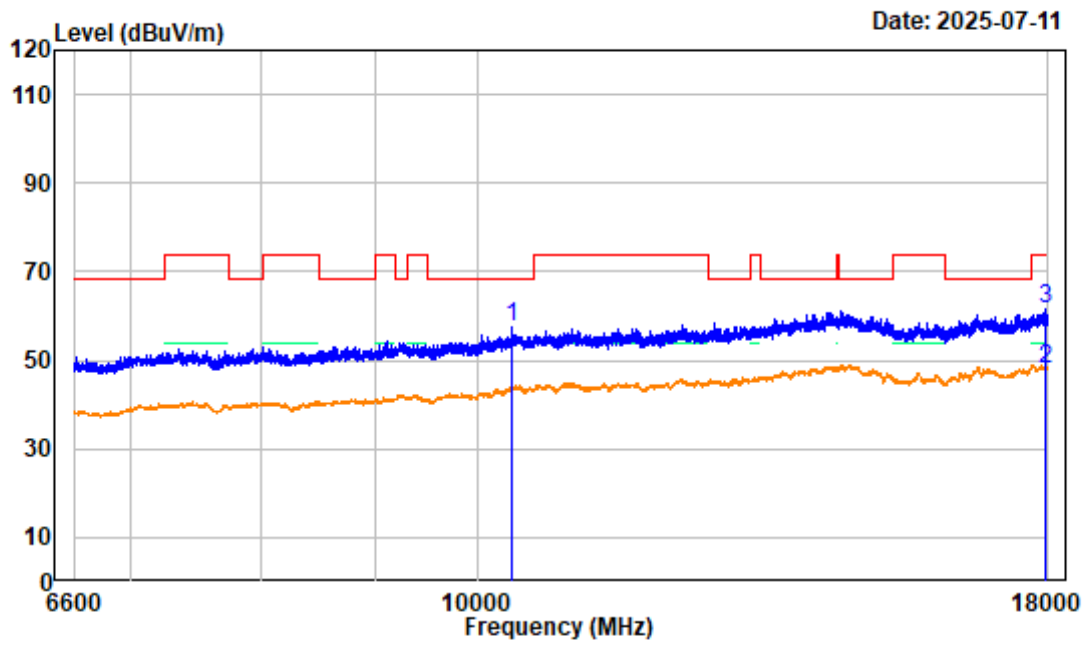

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10359.150	3.84	53.58	57.42	68.20	-10.78	Peak
2 17938.720	8.20	39.71	47.91	54.00	-6.09	Average
3 17938.720	8.20	53.51	61.71	74.00	-12.29	Peak


802.11A Low Channel 6.6GHz-18GHz_VERTICAL

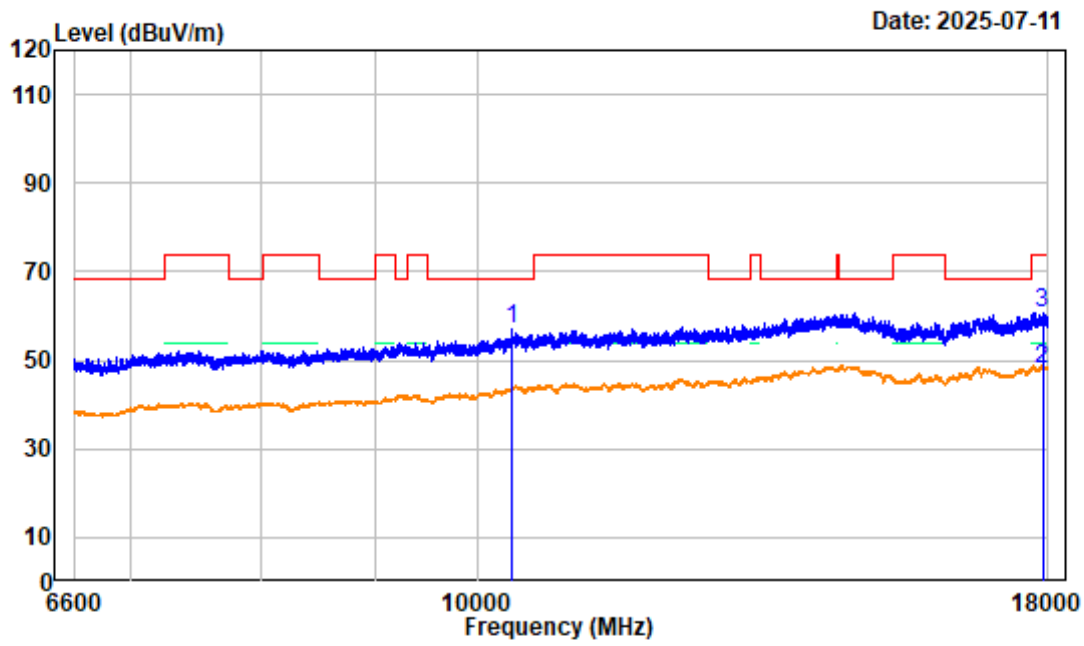

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.580	3.85	53.07	56.92	68.20	-11.28	Peak
2 17897.400	8.24	39.63	47.87	54.00	-6.13	Average
3 17897.400	8.24	52.22	60.46	74.00	-13.54	Peak


802.11A Low Channel Bandedge_HORIZONTAL

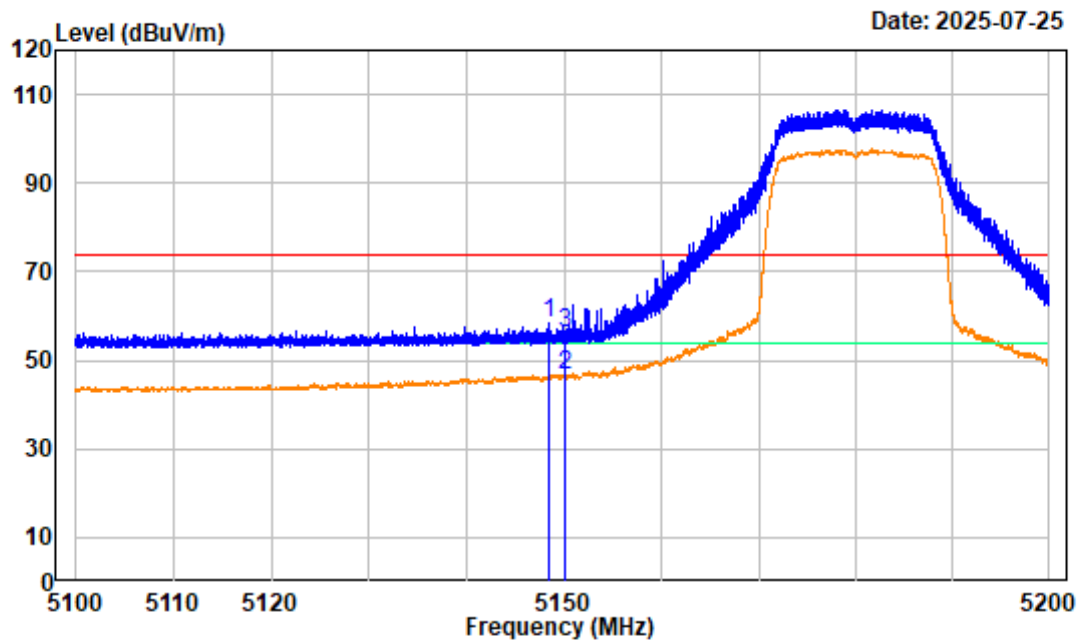

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5148.475	-5.99	64.63	58.64	74.00	-15.36 Peak
2	5150.000	-5.99	52.74	46.75	54.00	-7.25 Average
3	5150.000	-5.99	62.21	56.22	74.00	-17.78 Peak


802.11A Low Channel Bandedge_VERTICAL

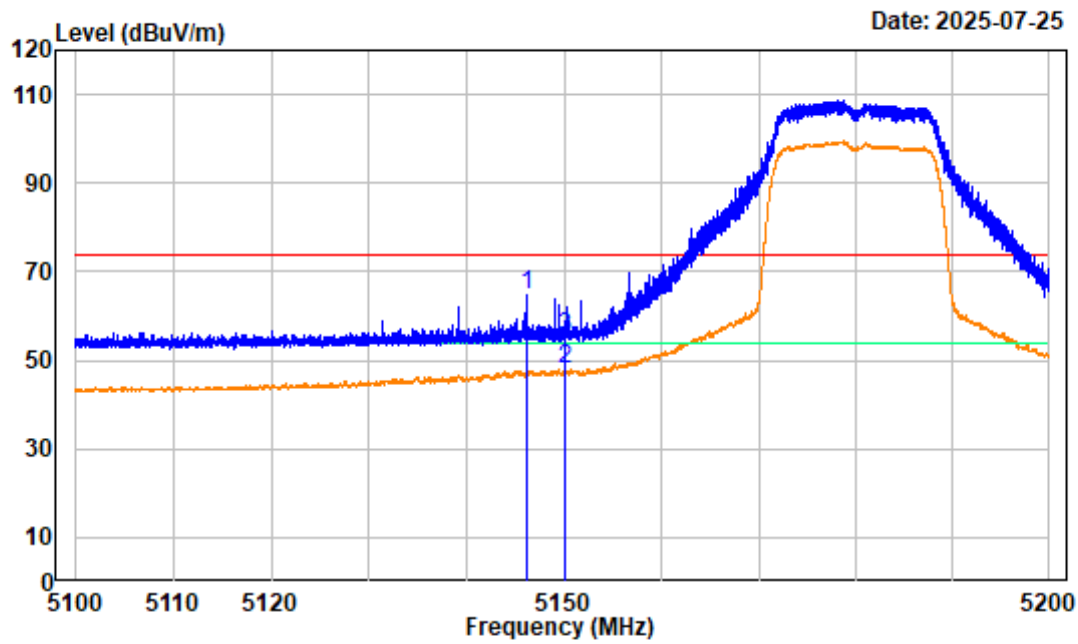

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5146.125	-6.00	70.55	64.55	74.00	-9.45 Peak
2	5150.000	-5.99	53.81	47.82	54.00	-6.18 Average
3	5150.000	-5.99	61.17	55.18	74.00	-18.82 Peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

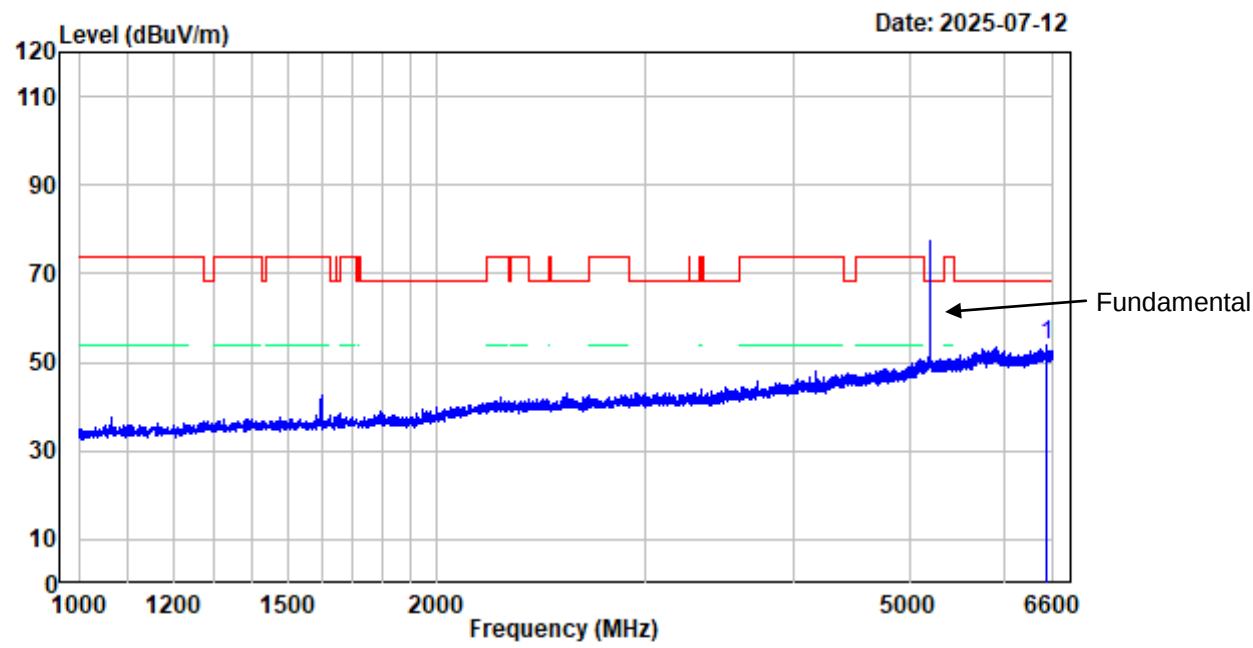

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6516.000	-3.79	57.56	53.77	68.20	-14.43 Peak

802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

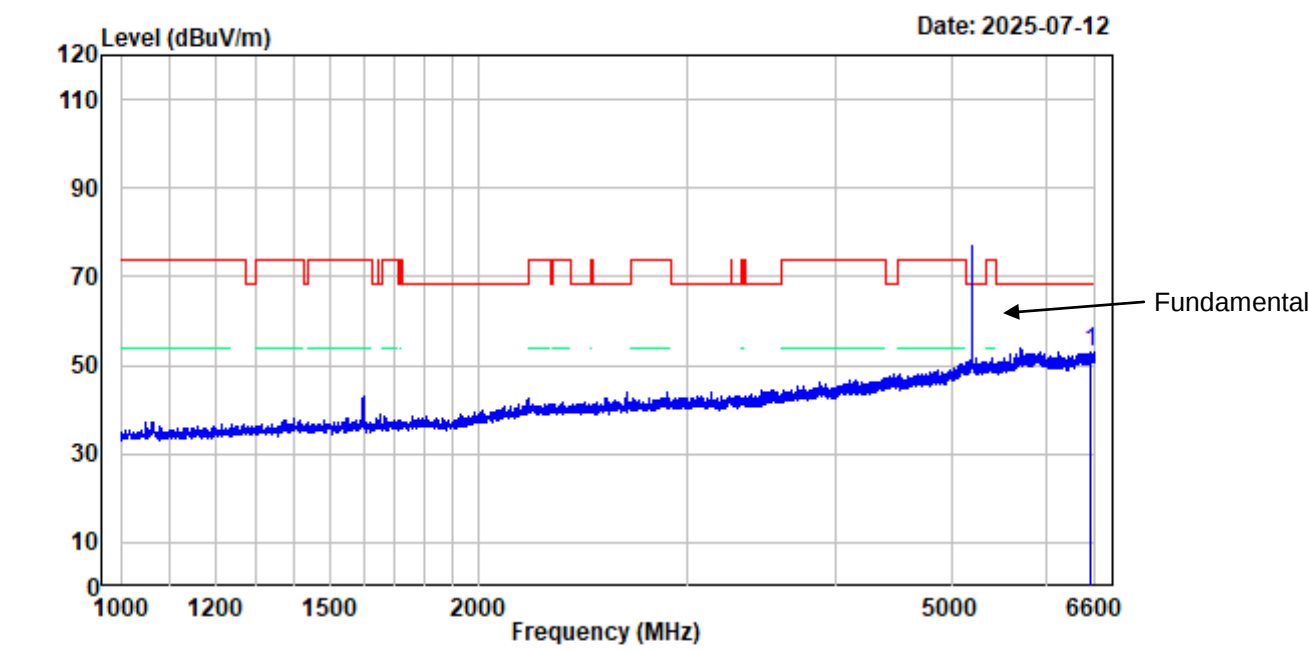

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504V06524E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5200MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6538.400	-3.74	56.71	52.97	68.20	-15.23 Peak


802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

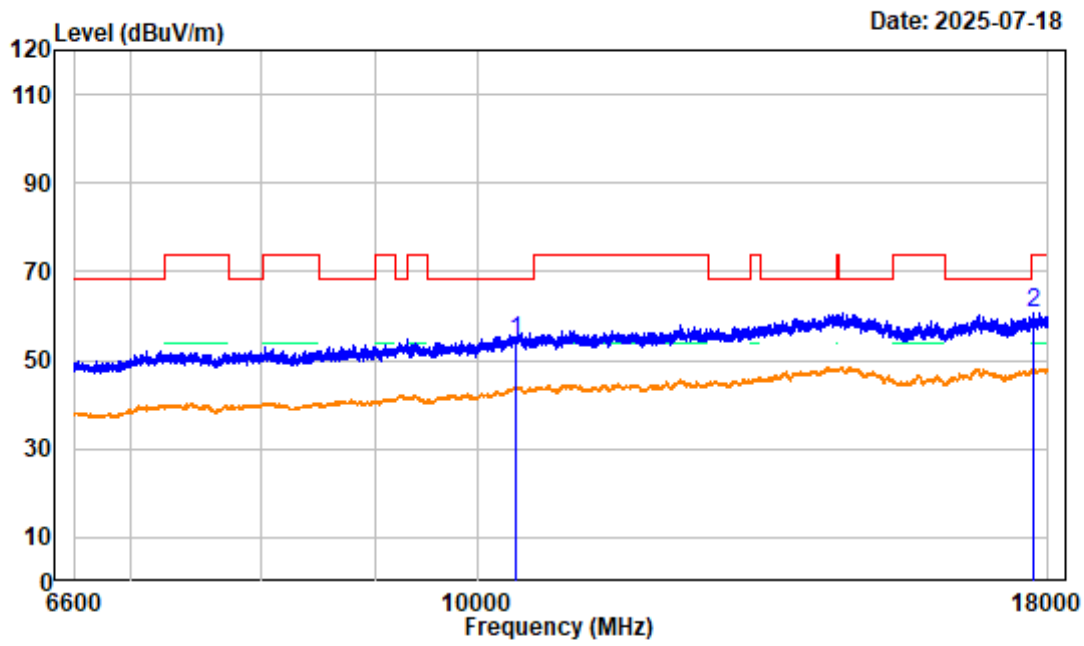

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.470	4.10	50.46	54.56	68.20	-13.64	Peak
2 17734.950	7.68	53.19	60.87	74.00	-13.13	Peak


802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

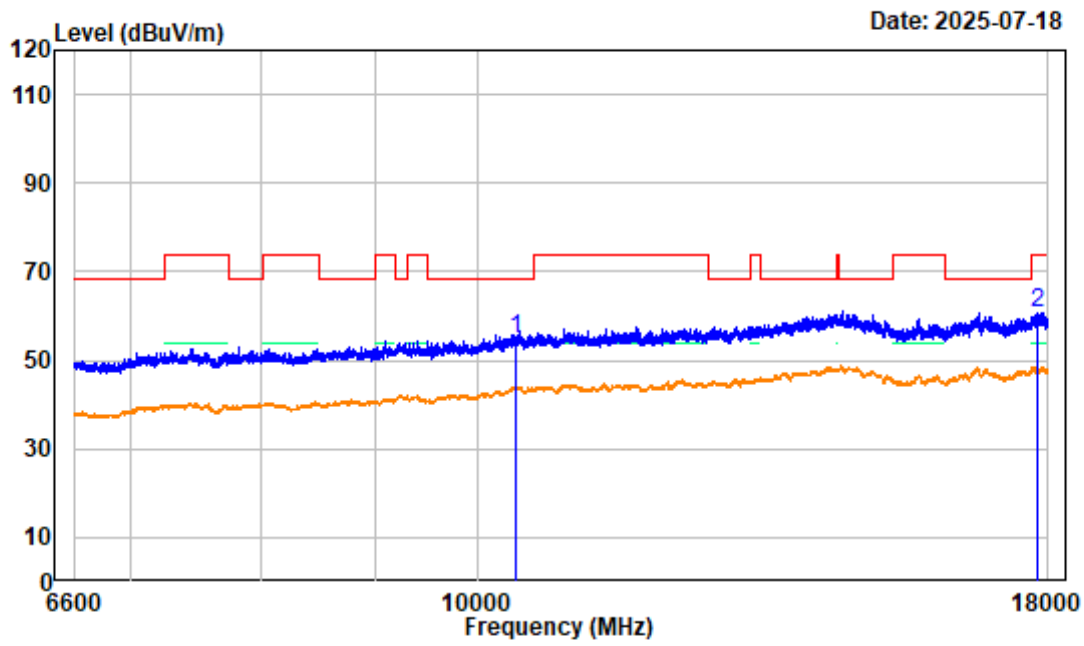

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.470	4.10	50.59	54.69	68.20	-13.51	Peak
2 17789.100	7.61	53.22	60.83	74.00	-13.17	Peak


802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

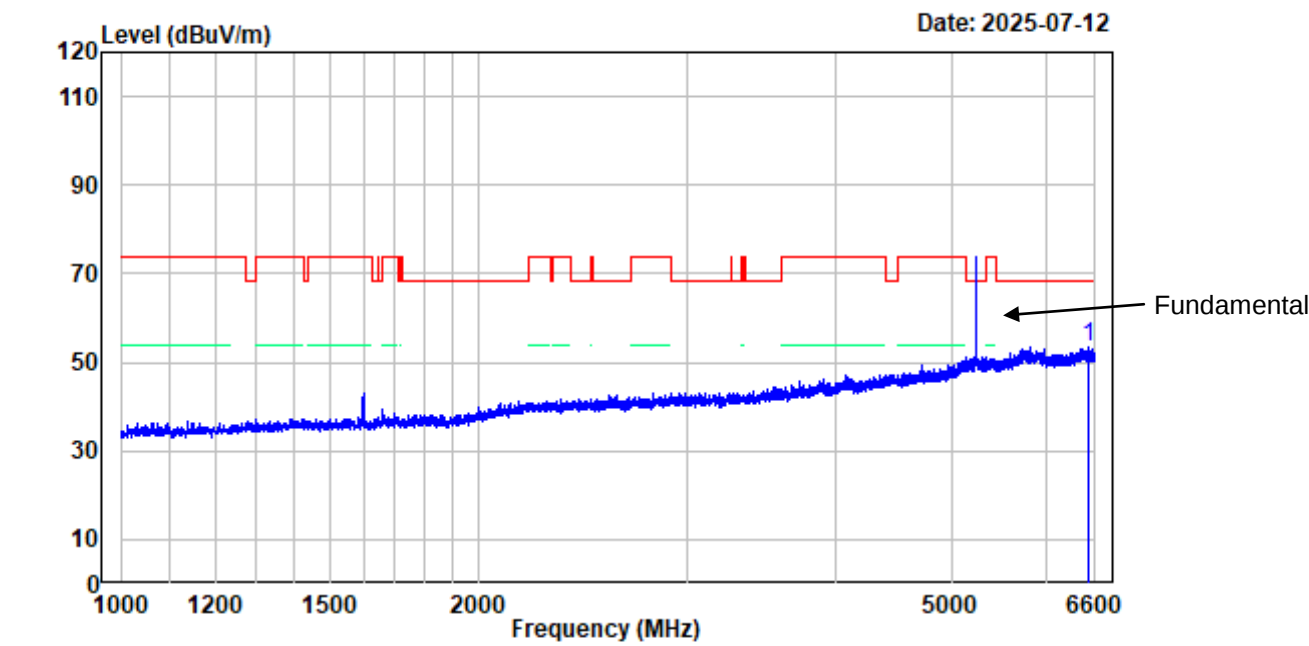

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6511.100	-3.80	57.17	53.37	68.20	-14.83 Peak


802.11A High Channel 1GHz-6.6GHz_VERTICAL

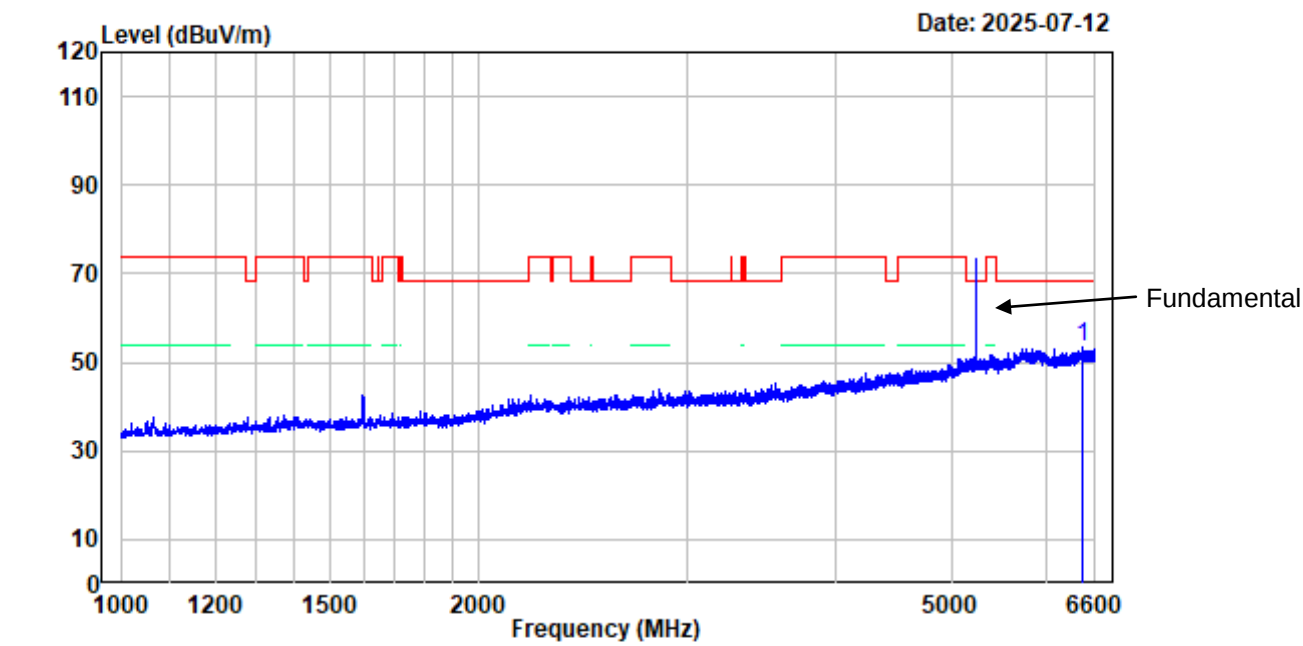

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6448.800	-3.61	56.97	53.36	68.20	-14.84 Peak


802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

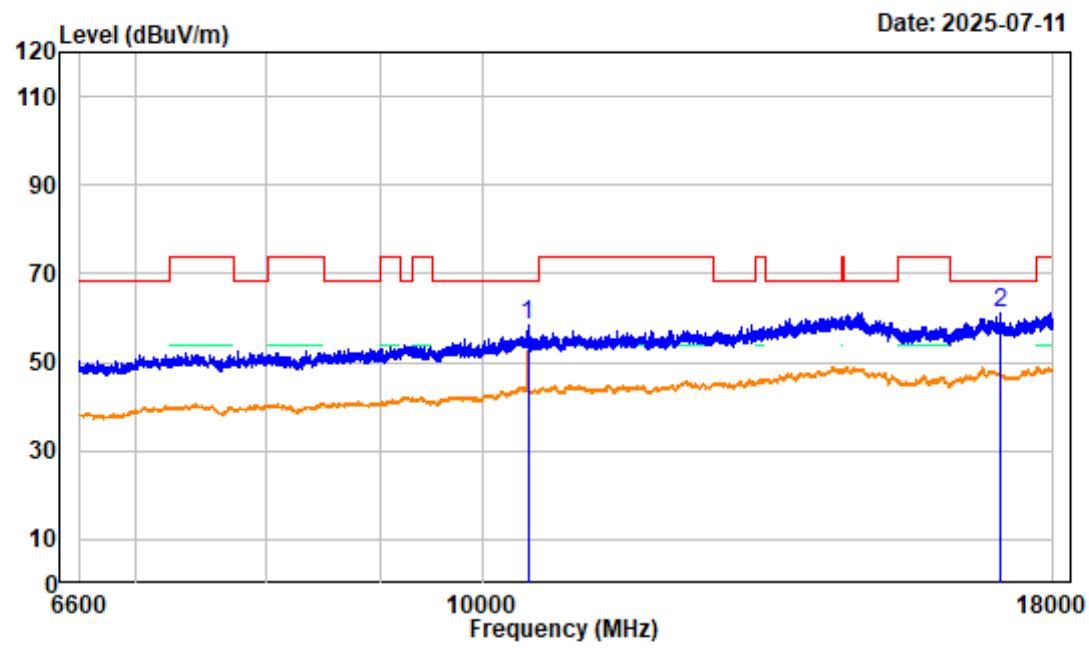

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.280	3.92	54.28	58.20	68.20	-10.00	Peak
2 17045.250	7.37	53.69	61.06	68.20	-7.14	Peak


802.11A High Channel 6.6GHz-18GHz_VERTICAL

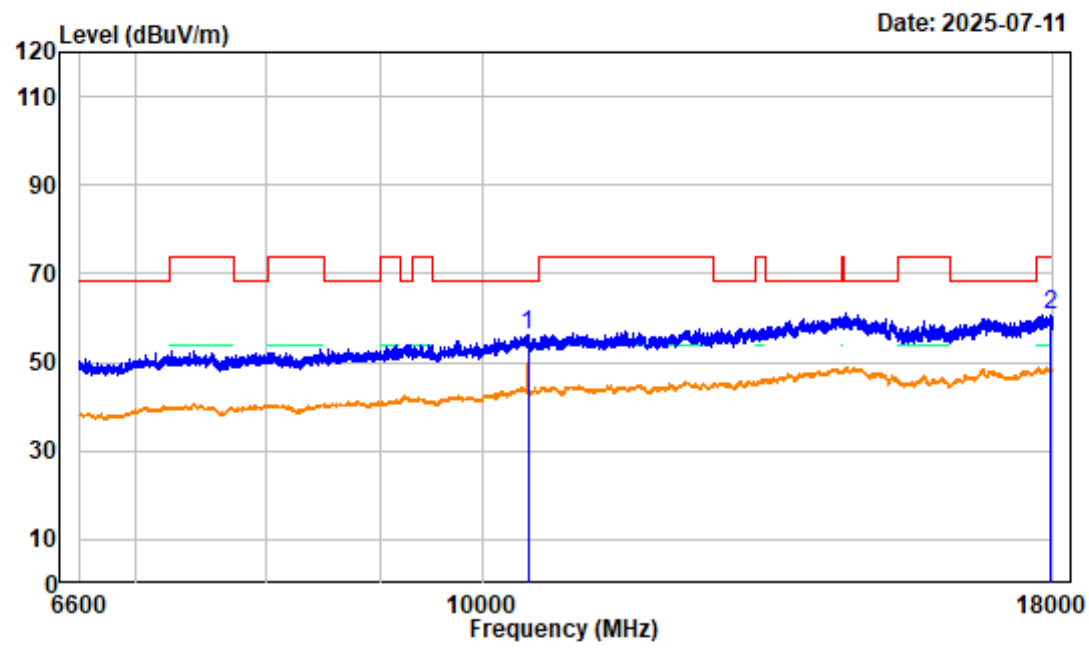

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.280	3.92	52.11	56.03	68.20	-12.17	Peak
2 17970.070	8.24	52.49	60.73	74.00	-13.27	Peak


802.11A High Channel Bandedge_HORIZONTAL

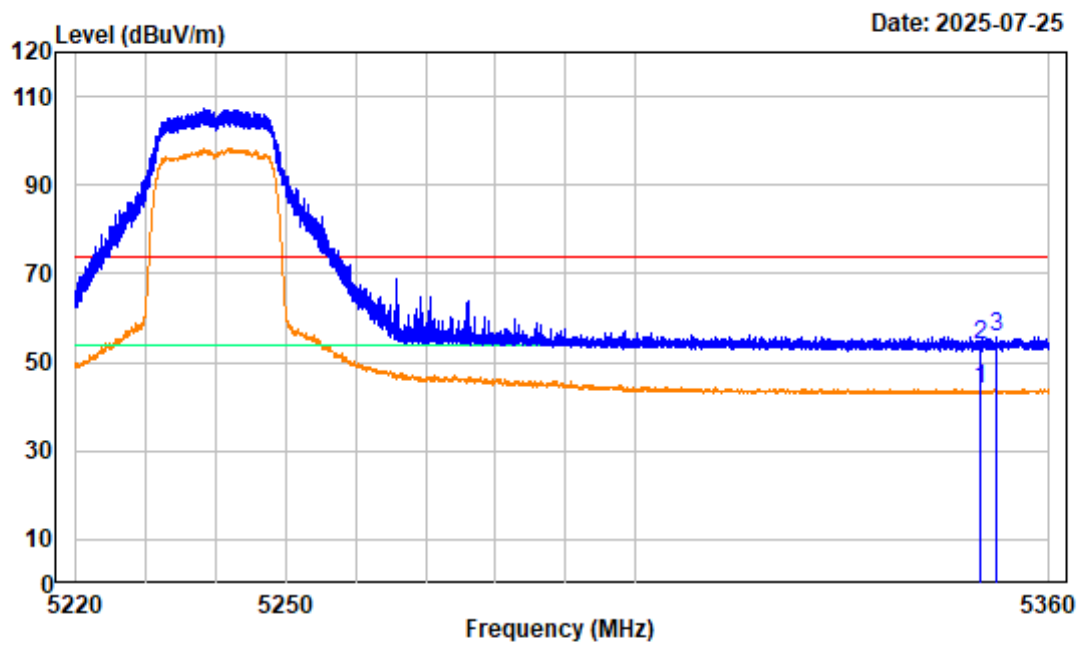

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.007	-5.81	49.81	44.00	54.00	-10.00	Average
2 5350.007	-5.81	59.49	53.68	74.00	-20.32	Peak
3 5352.440	-5.80	61.60	55.80	74.00	-18.20	Peak


802.11A High Channel Bandedge_VERTICAL

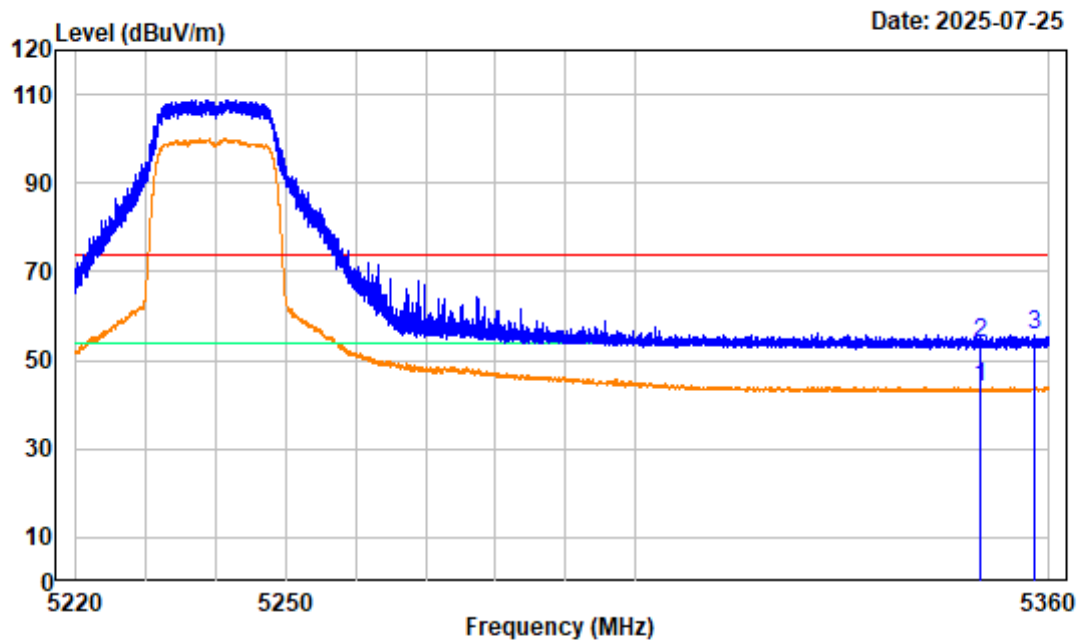

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.007	-5.81	49.75	43.94	54.00	-10.06	Average
2 5350.007	-5.81	59.73	53.92	74.00	-20.08	Peak
3 5357.865	-5.76	61.62	55.86	74.00	-18.14	Peak


802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

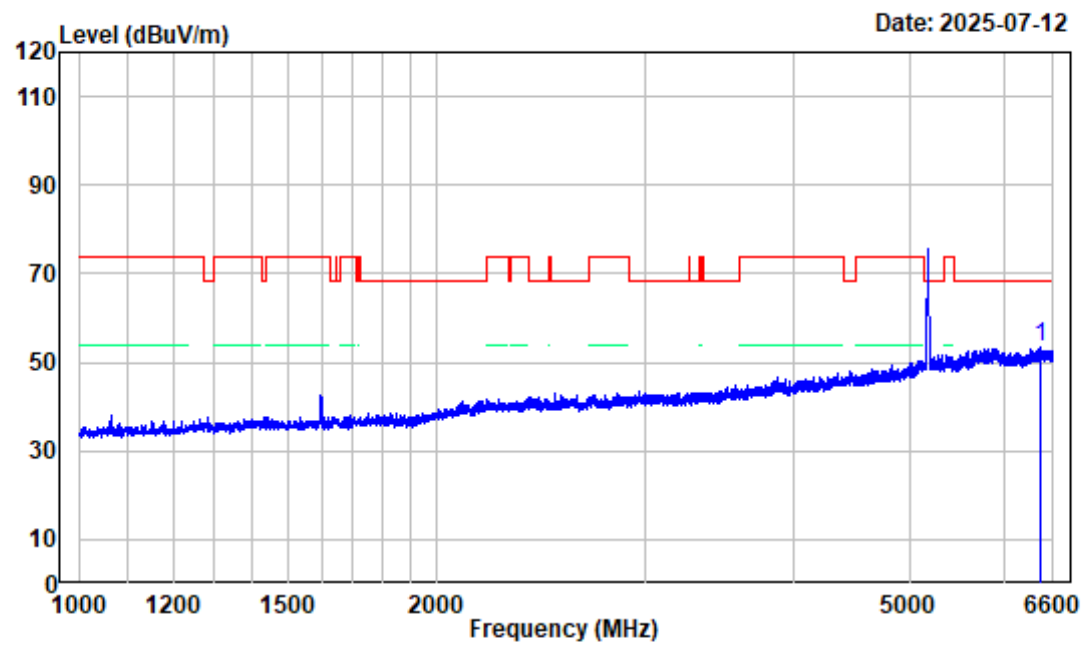

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6441.800	-3.62	56.87	53.25	68.20	-14.95	Peak


802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

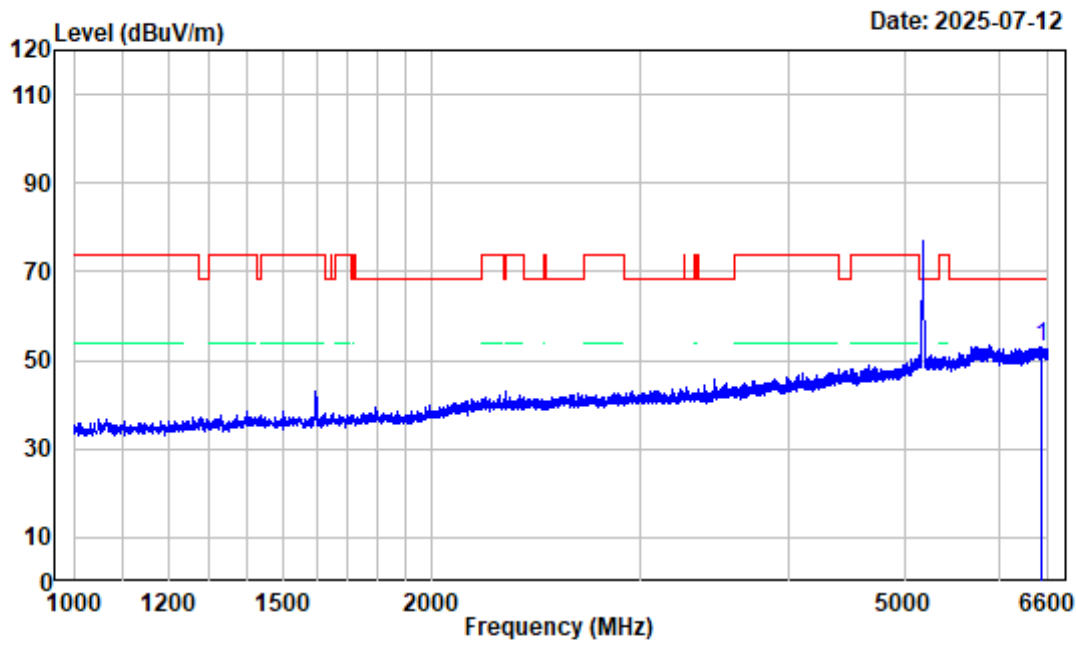

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6513.200	-3.79	56.92	53.13	68.20	-15.07 Peak


802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

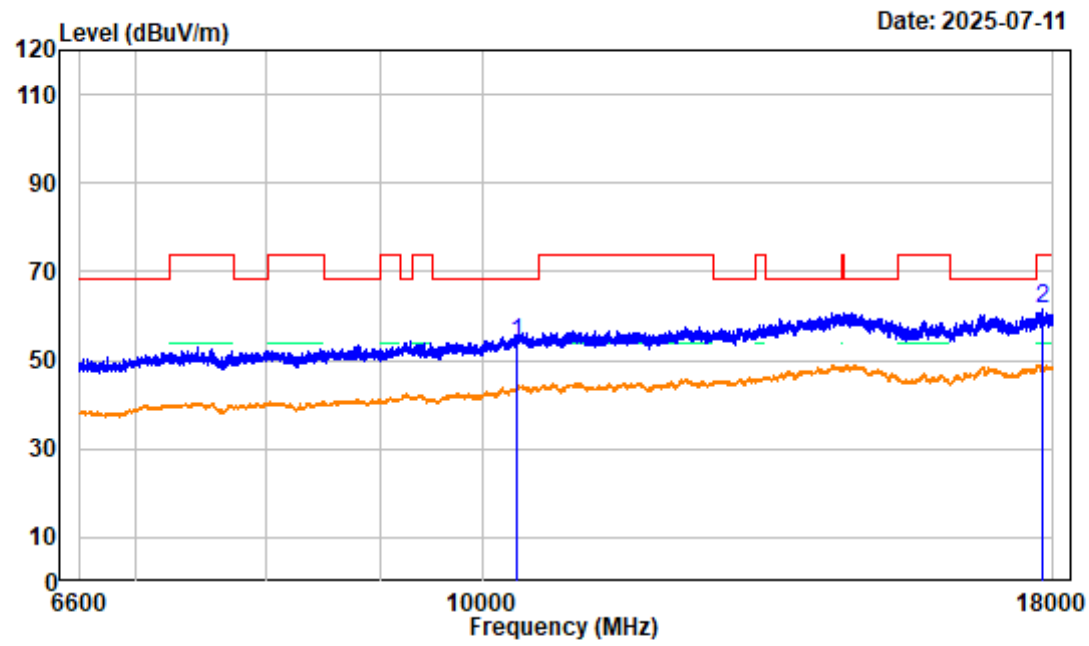

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.580	3.85	50.13	53.98	68.20	-14.22	Peak
2 17814.750	7.77	53.64	61.41	74.00	-12.59	Peak


802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

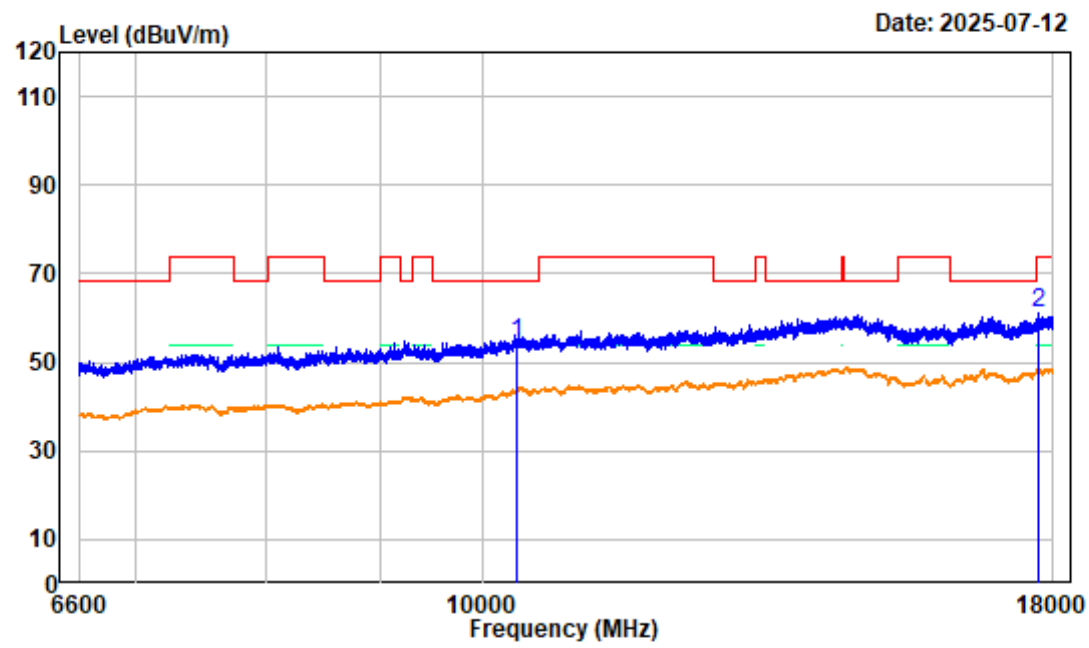

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.580	3.85	50.46	54.31	68.20	-13.89	Peak
2 17744.930	7.71	53.31	61.02	74.00	-12.98	Peak


802.11AC20 Low Channel Bandedge_HORIZONTAL

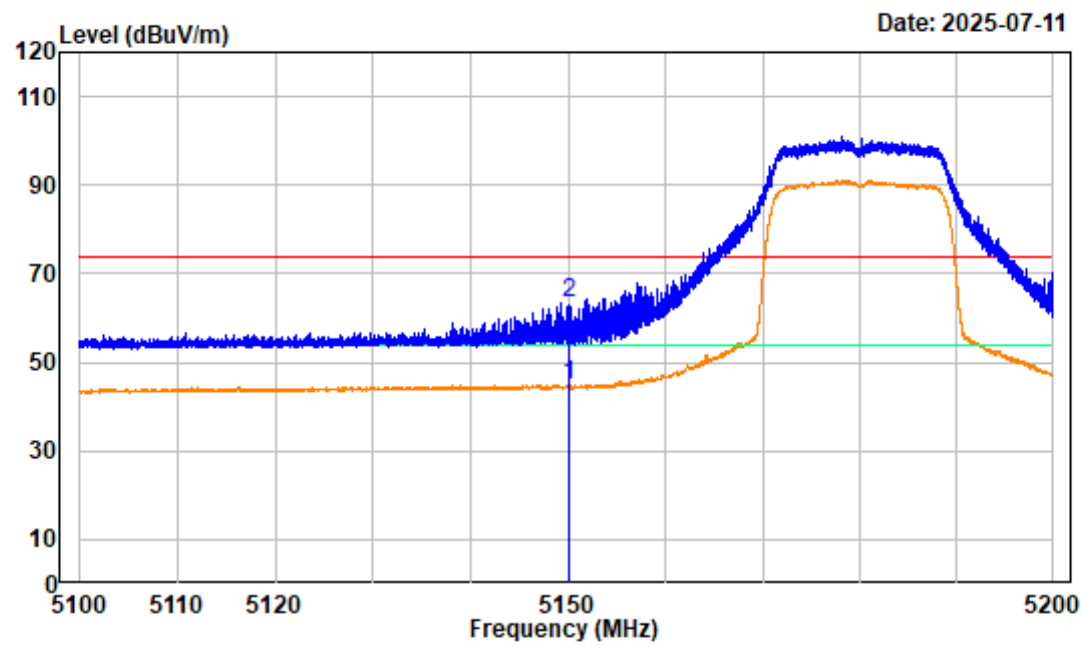

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.00	45.01	54.00	-8.99 average
2	5150.000	-5.99	69.59	63.60	74.00	-10.40 peak


802.11AC20 Low Channel Bandedge_VERTICAL

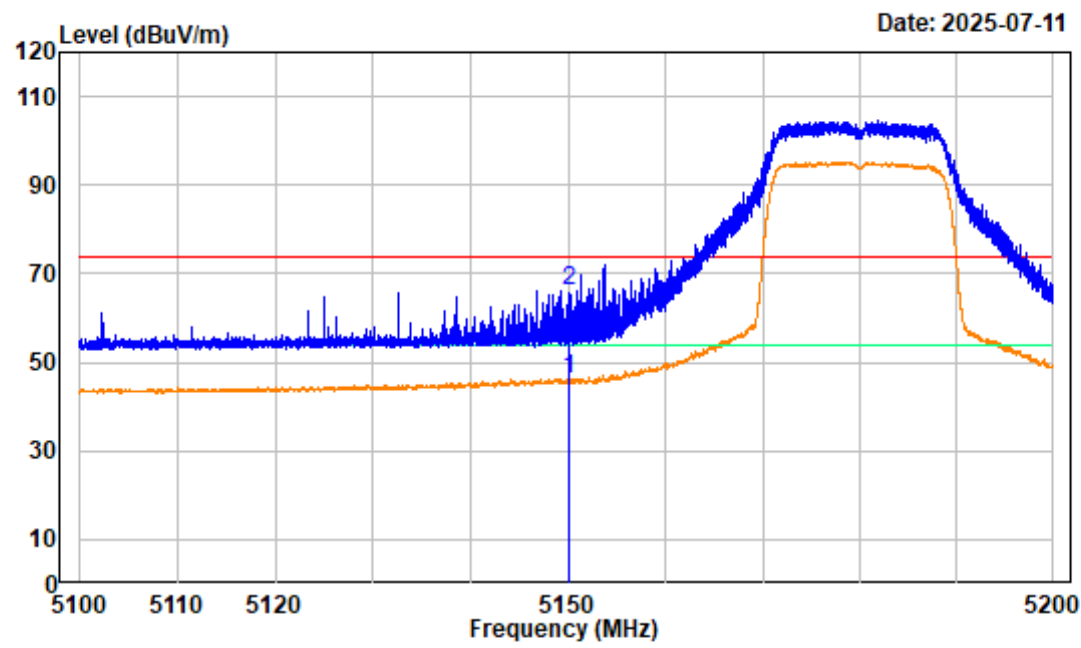

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.16	46.17	54.00	-7.83 average
2	5150.000	-5.99	72.22	66.23	74.00	-7.77 peak


802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

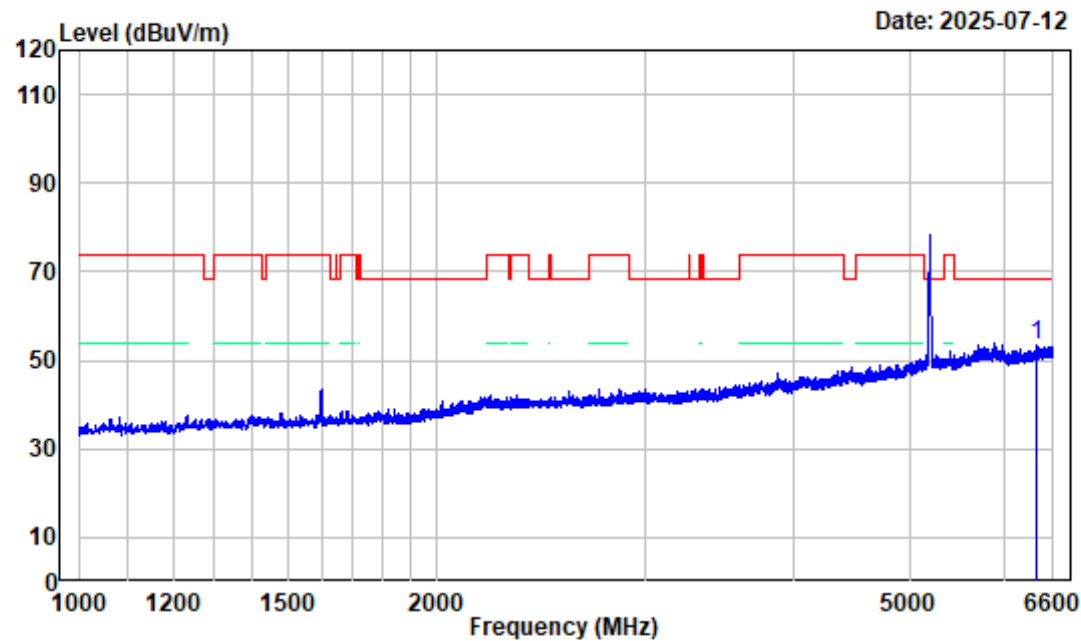

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6385.100	-3.93	57.39	53.46	68.20	-14.74 Peak


802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

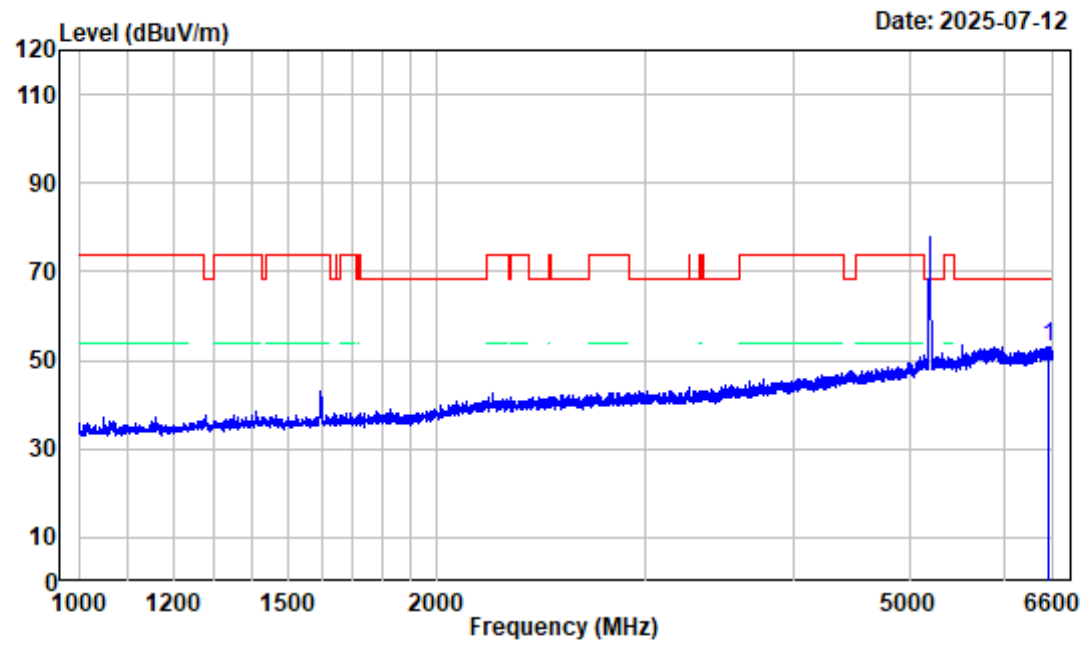

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6543.300	-3.73	56.81	53.08	68.20	-15.12 Peak


802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

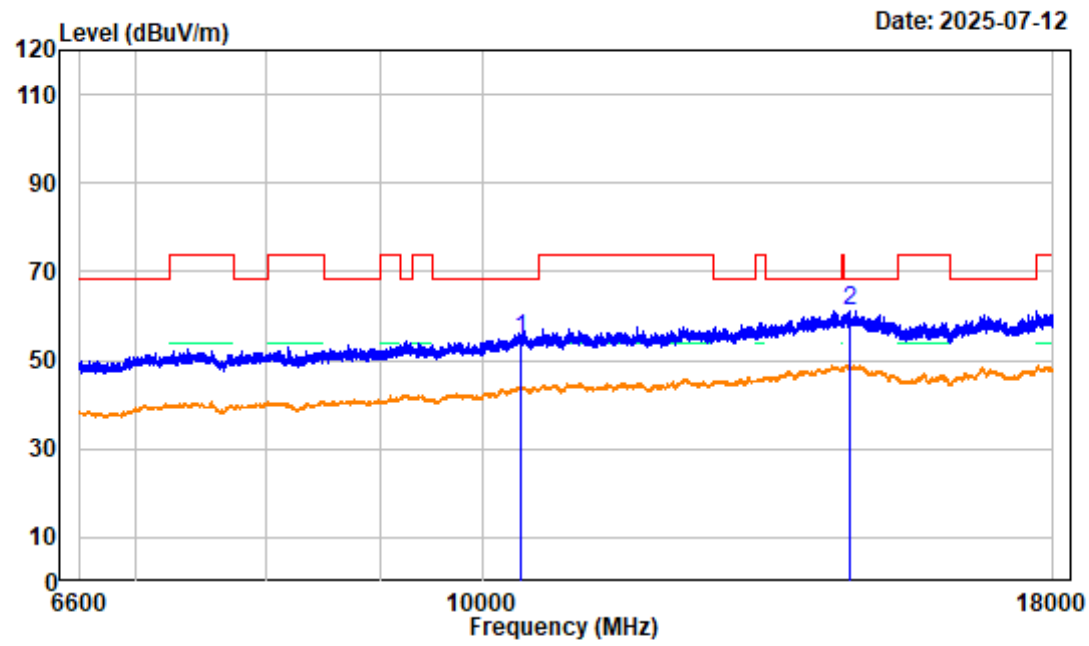

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.10	50.73	54.83	68.20	-13.37	peak
2 14601.380	8.09	53.12	61.21	68.20	-6.99	Peak


802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

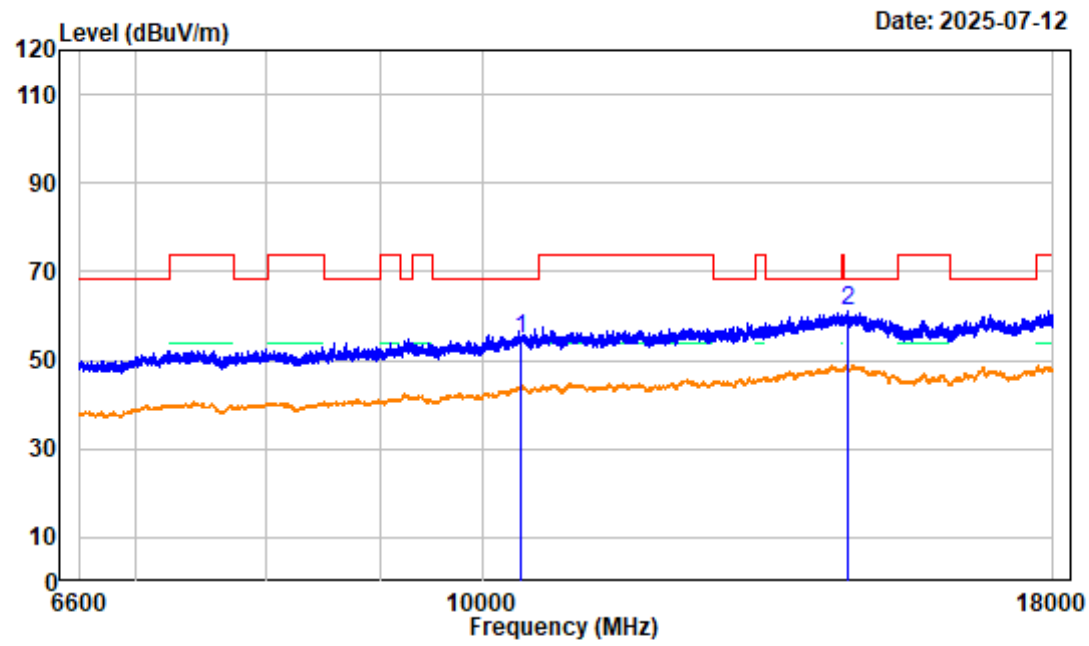

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.470	4.10	50.47	54.57	68.20	-13.63	Peak
2 14567.170	8.71	52.43	61.14	68.20	-7.06	Peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

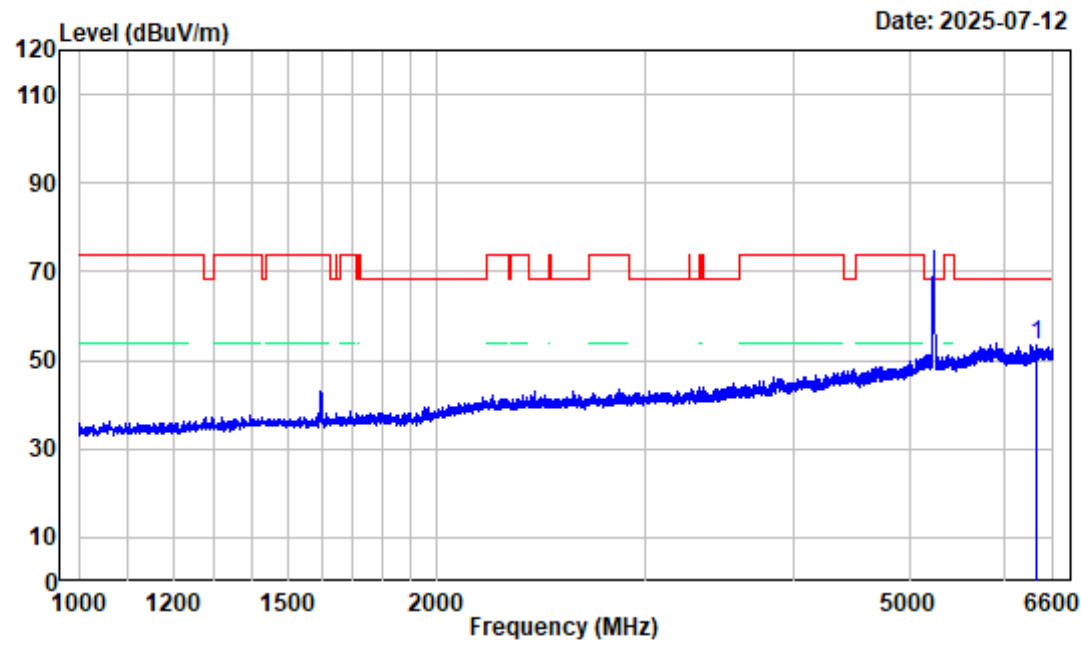

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6381.600	-3.98	57.33	53.35	68.20	-14.85 Peak


802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

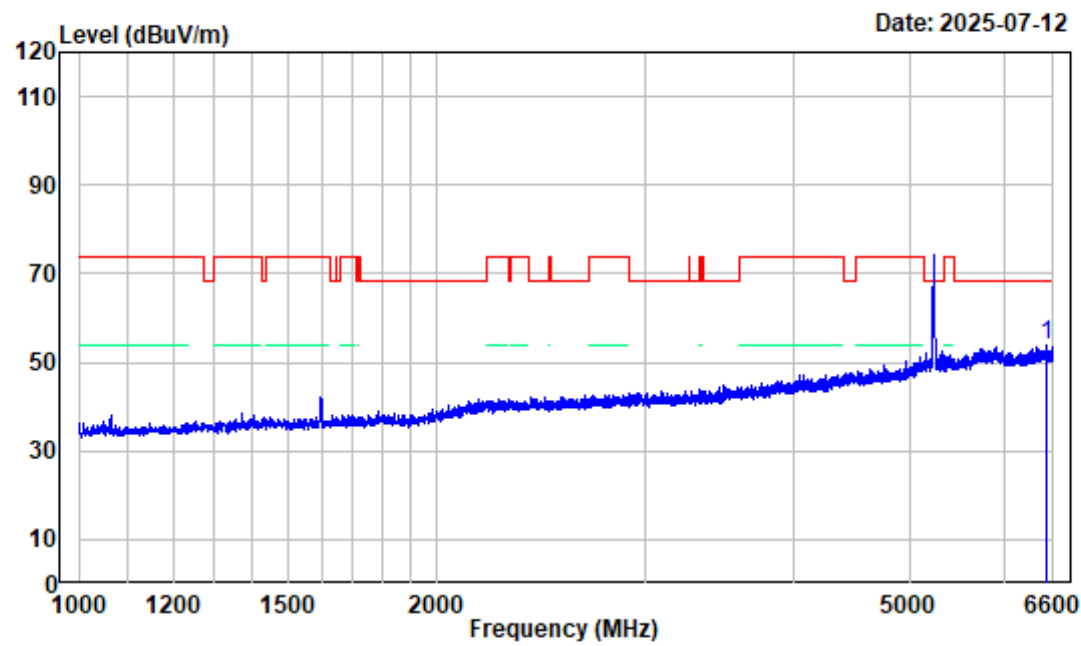

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6527.200	-3.77	57.63	53.86	68.20	-14.34 Peak


802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

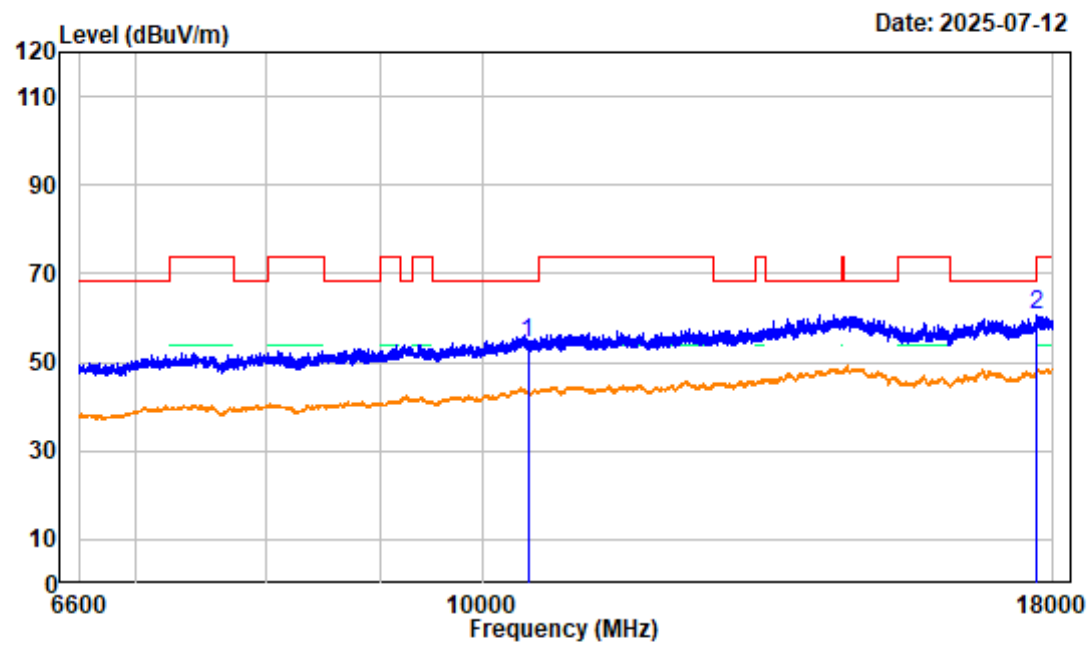

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.280	3.92	50.31	54.23	68.20	-13.97	Peak
2 17712.150	7.62	53.24	60.86	74.00	-13.14	Peak


802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

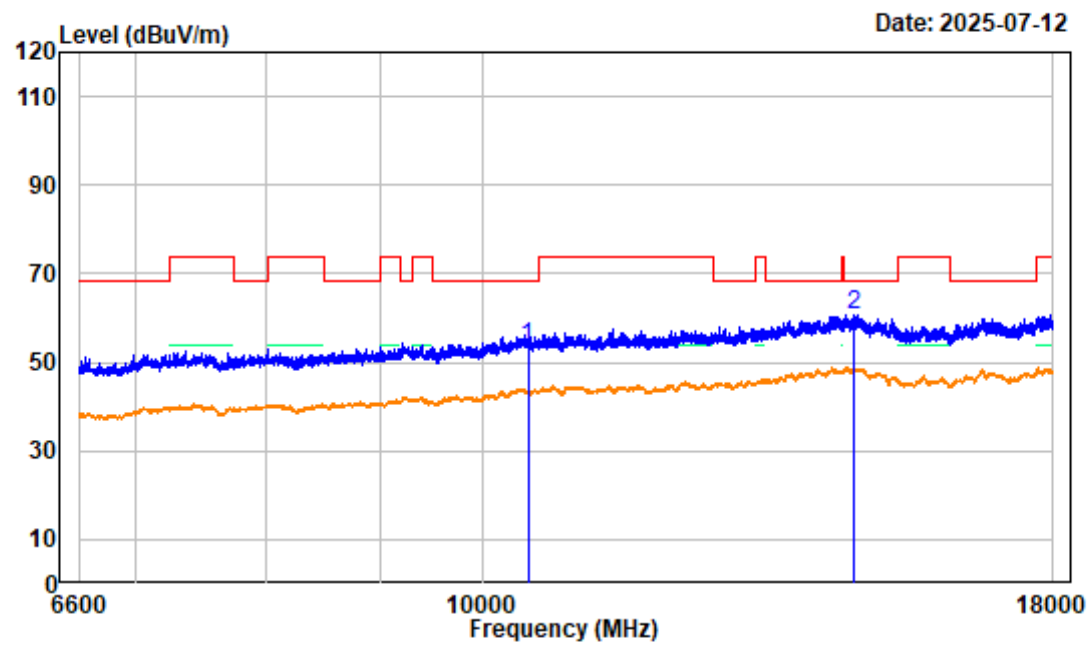

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.280	3.92	49.68	53.60	68.20	-14.60	Peak
2 14649.830	8.57	52.15	60.72	68.20	-7.48	Peak

802.11AC20 High Channel Bandedge_HORIZONTAL

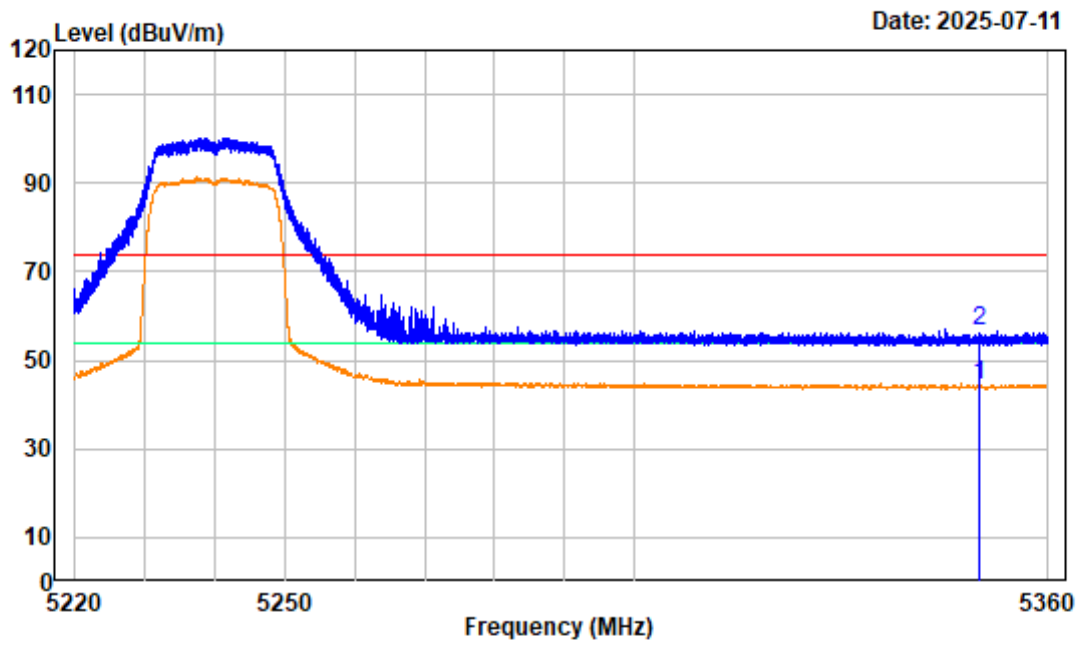

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC20 High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.30	44.49	54.00	-9.51 average
2	5350.000	-5.81	62.24	56.43	74.00	-17.57 peak


802.11AC20 High Channel Bandedge_VERTICAL

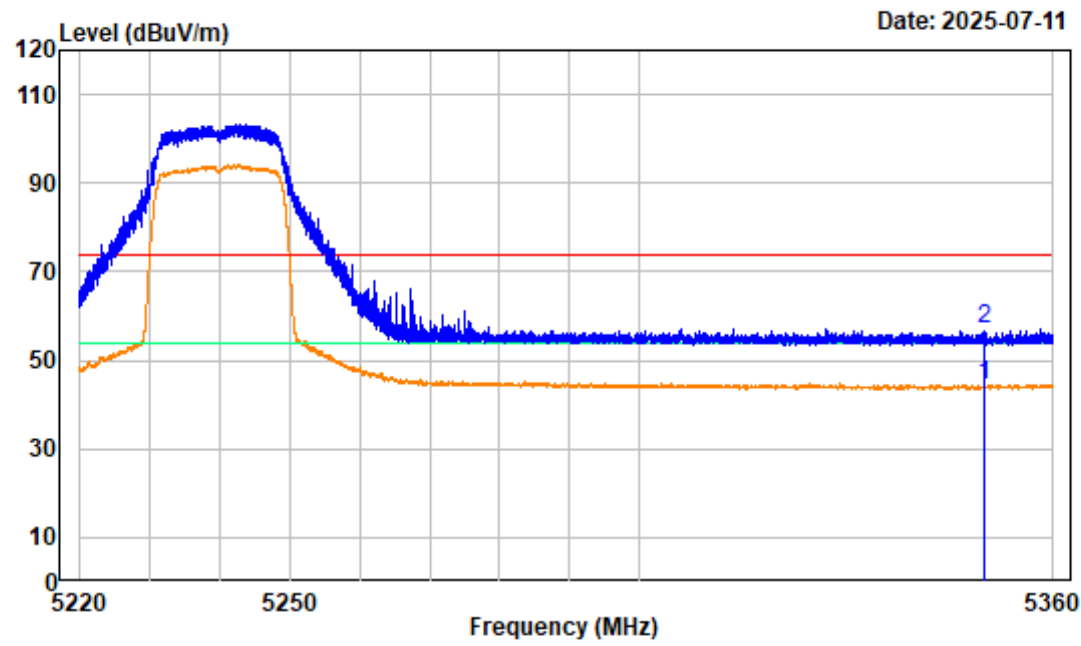

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5240MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.09	44.28	54.00	-9.72 average
2	5350.000	-5.81	62.78	56.97	74.00	-17.03 peak


802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

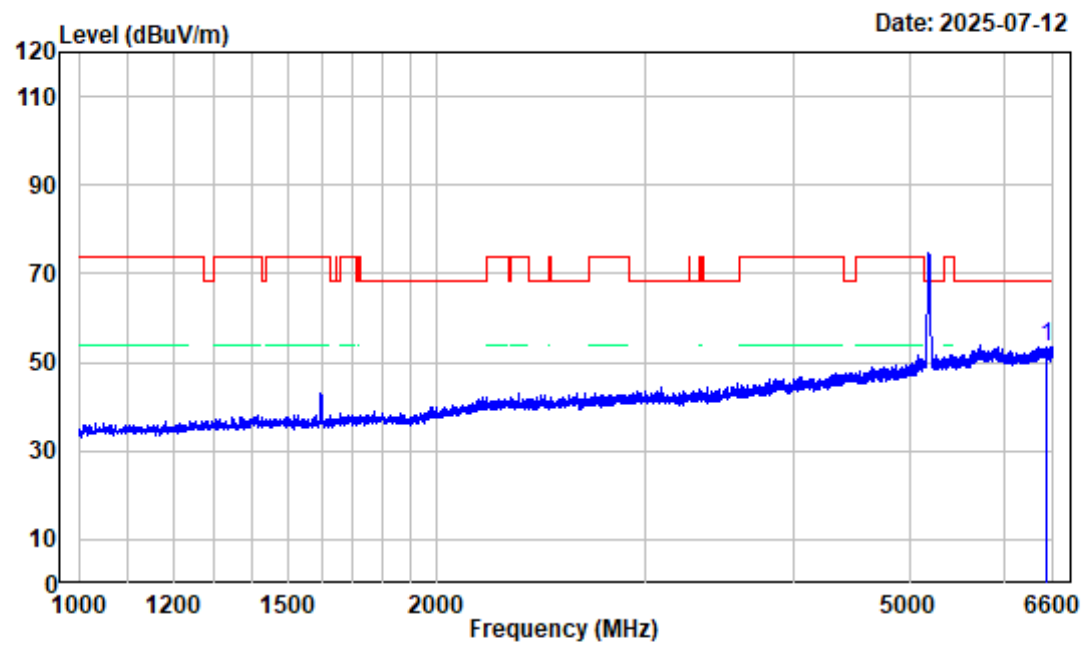

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6525.100	-3.77	57.31	53.54	68.20	-14.66	Peak


802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

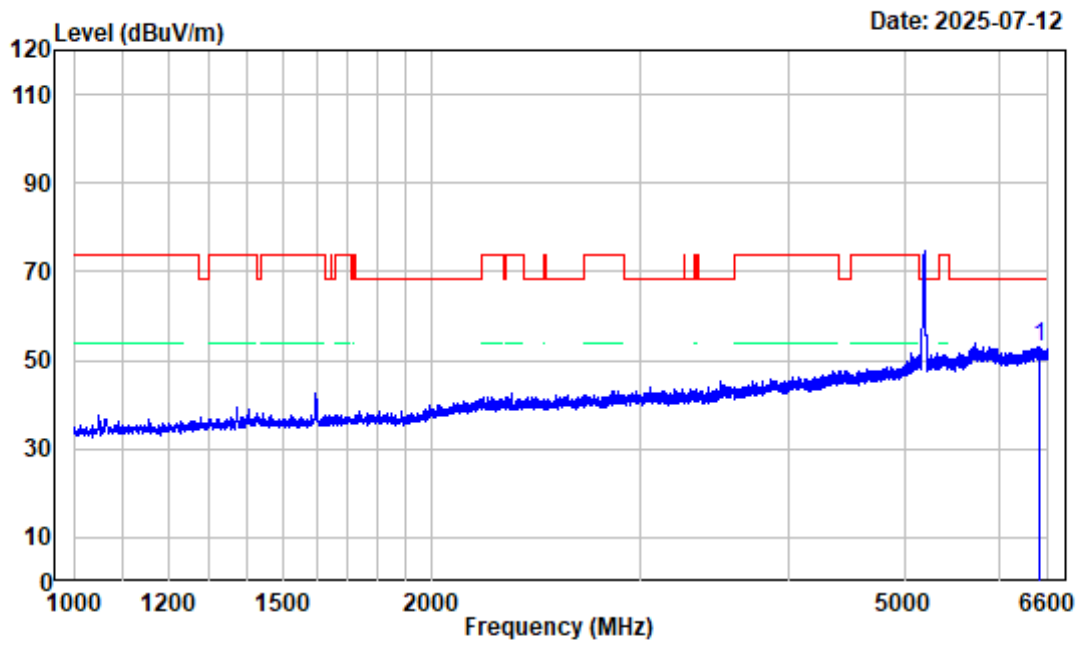

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6491.500	-3.79	56.81	53.02	68.20	-15.18 Peak


802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

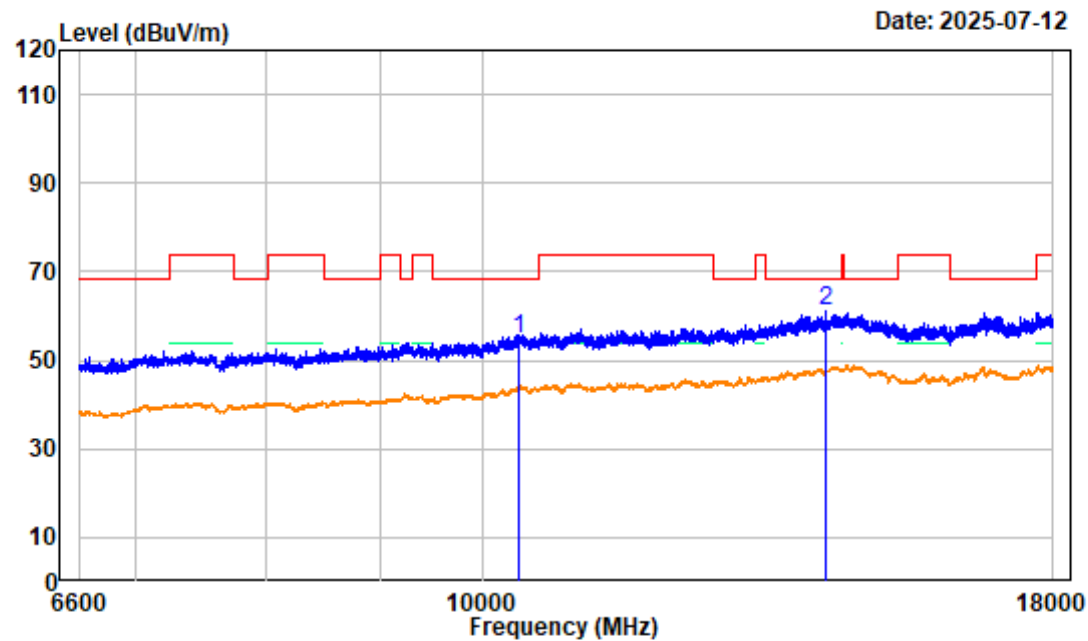

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5190MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.530	3.97	50.86	54.83	68.20	-13.37	Peak
2 14252.250	8.26	52.67	60.93	68.20	-7.27	Peak


802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

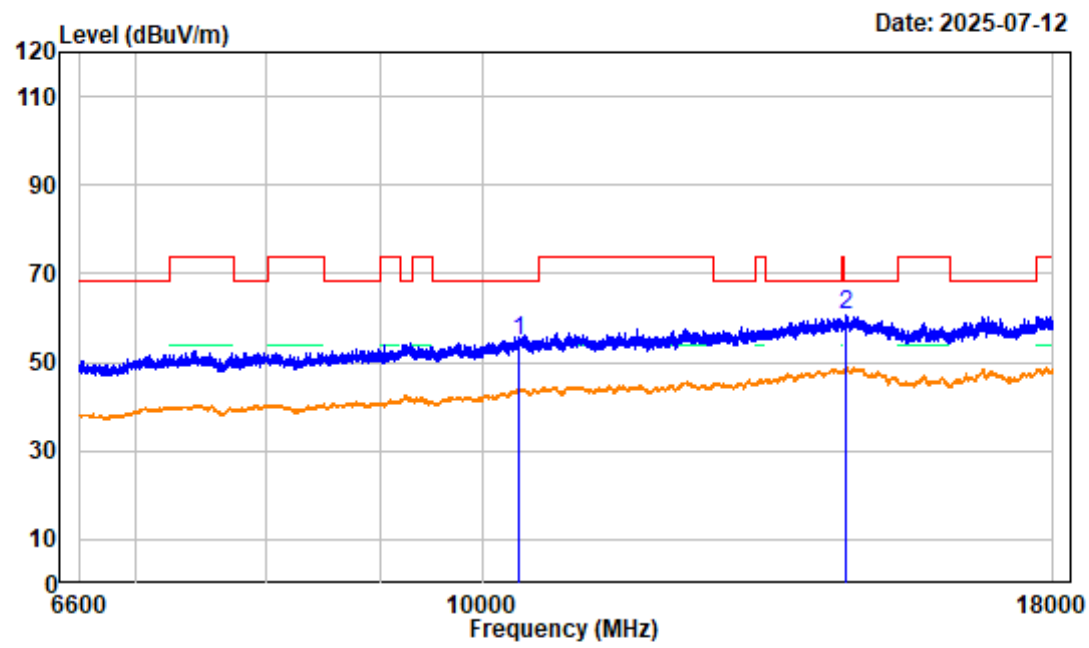

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5190MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.530	3.97	50.62	54.59	68.20	-13.61	Peak
2 14540.100	8.89	51.59	60.48	68.20	-7.72	Peak


802.11AC40 Low Channel Bandedge_HORIZONTAL

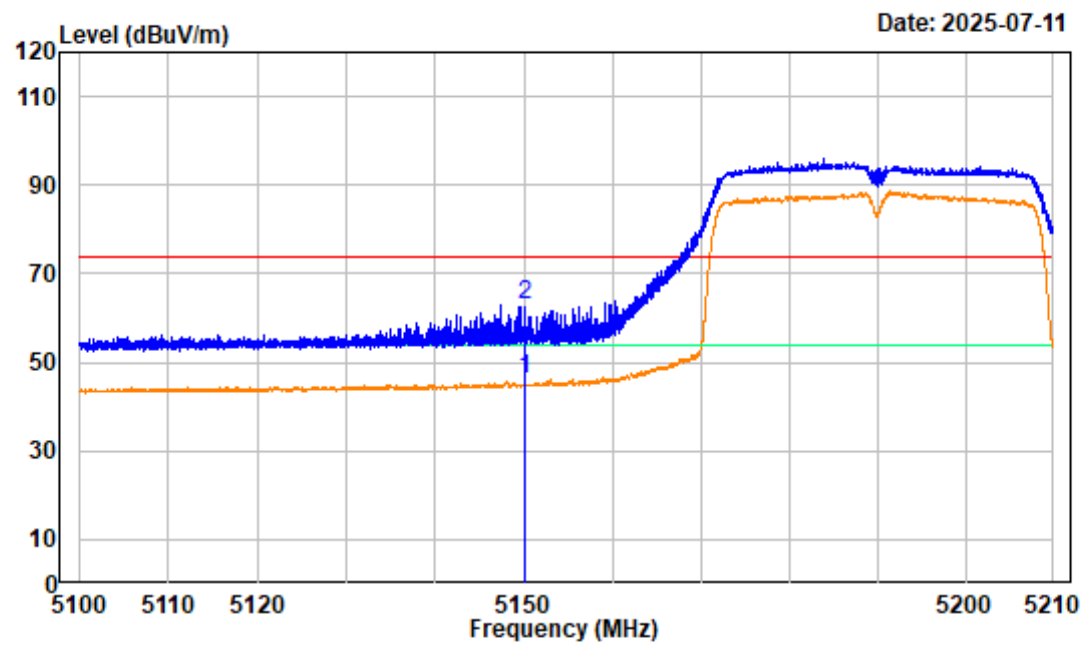

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5190MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.00	46.01	54.00	-7.99 average
2	5150.000	-5.99	68.97	62.98	74.00	-11.02 peak


802.11AC40 Low Channel Bandedge_VERTICAL

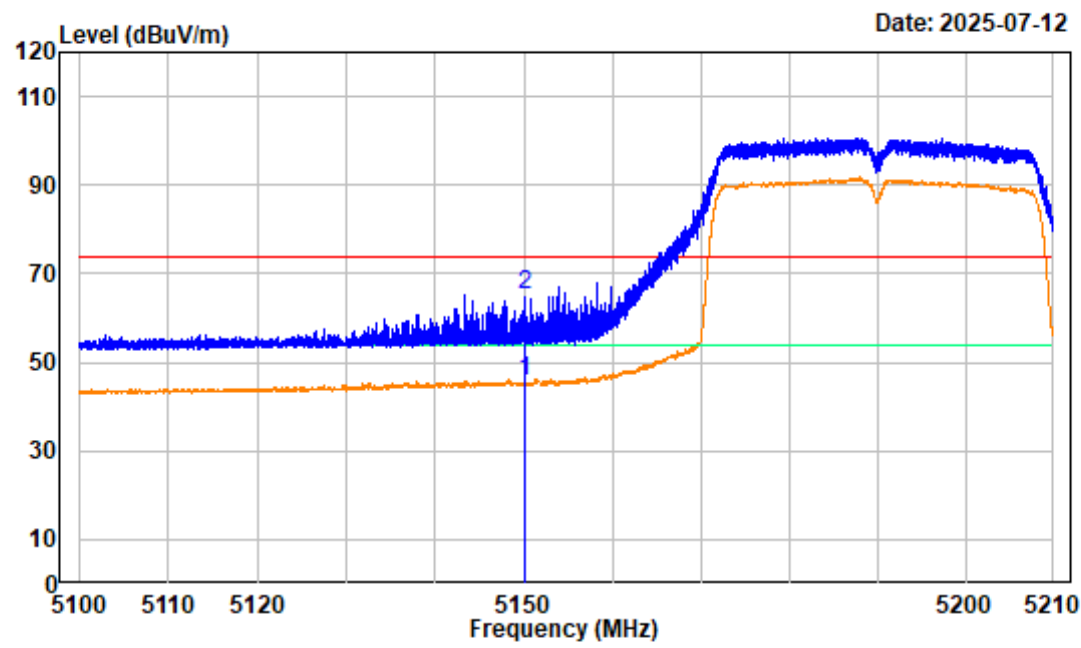

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5190MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.50	45.51	54.00	-8.49 average
2	5150.000	-5.99	71.39	65.40	74.00	-8.60 peak


802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

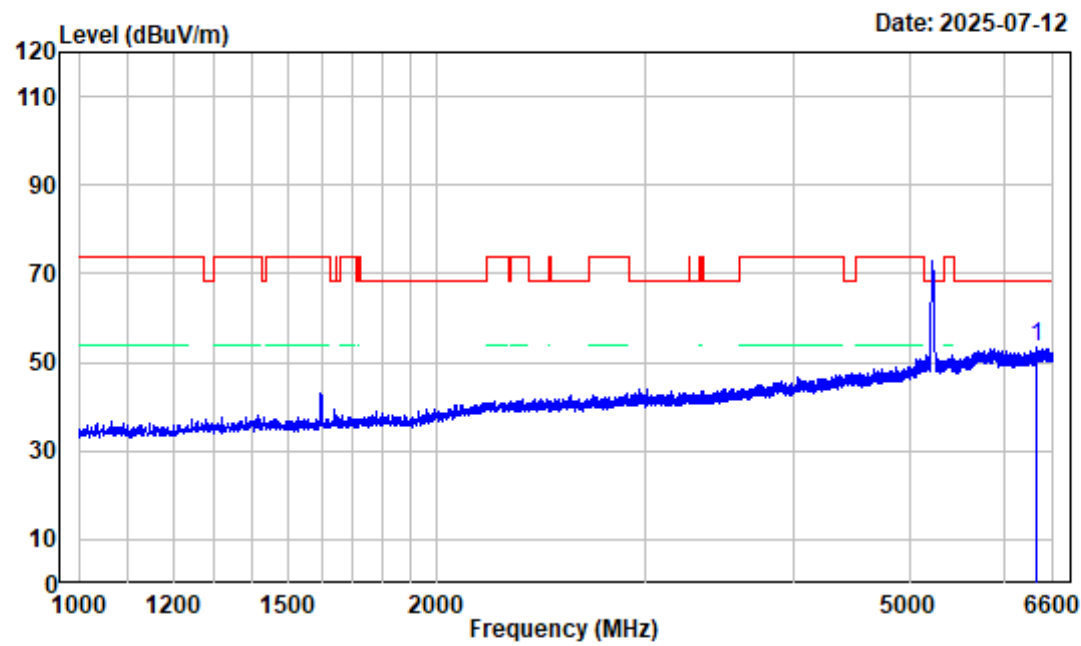

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6402.600	-3.67	56.91	53.24	68.20	-14.96	Peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

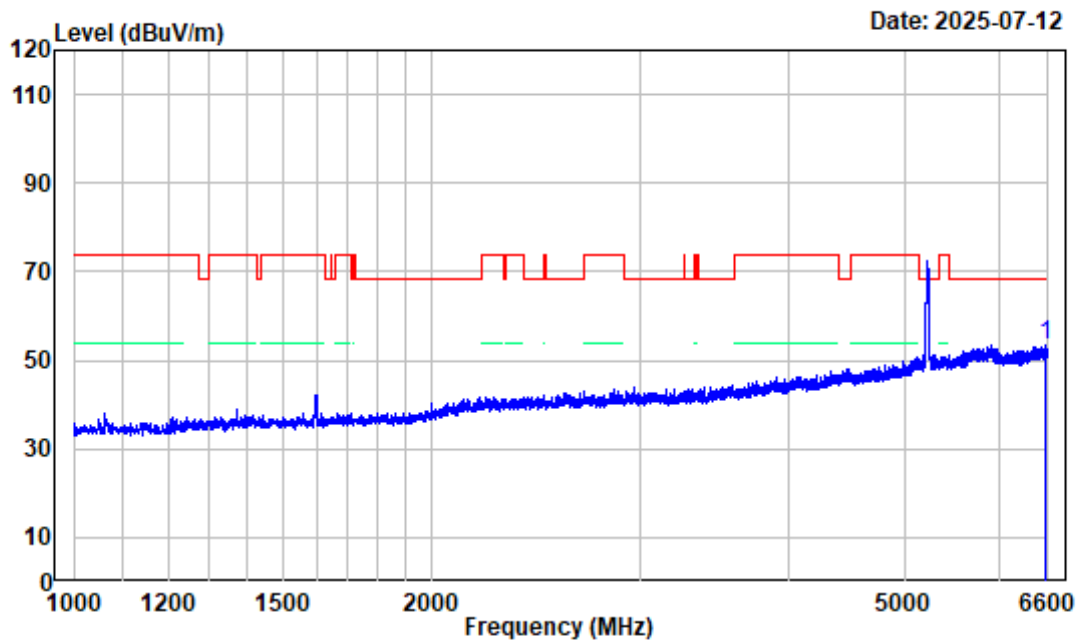

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6576.900	-3.63	56.96	53.33	68.20	-14.87 Peak


802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

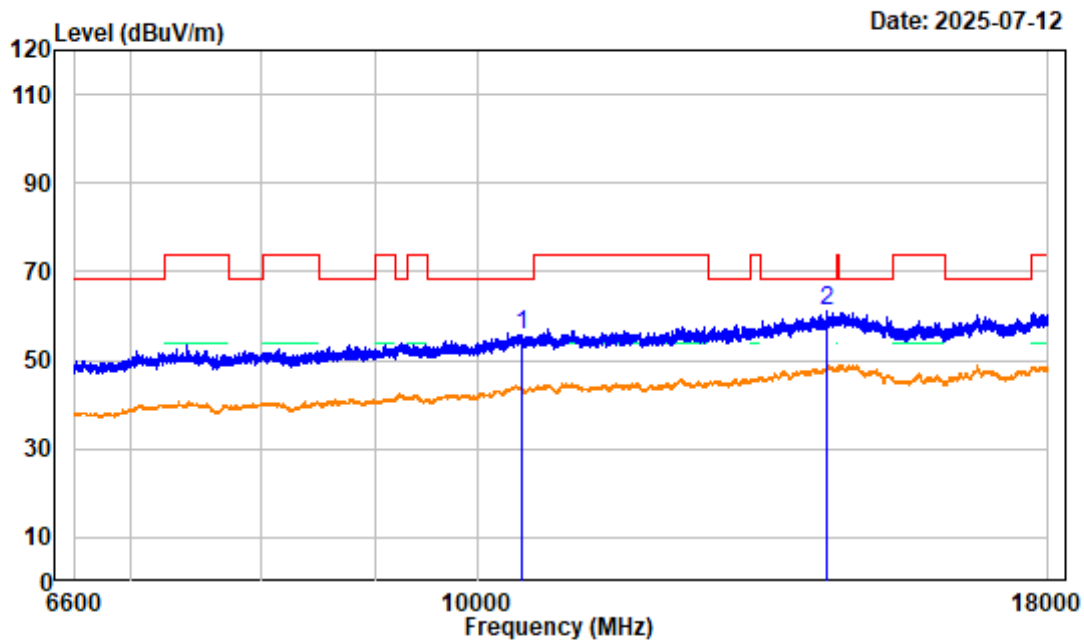

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5230MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.330	4.17	51.39	55.56	68.20	-12.64	Peak
2 14334.900	8.60	52.70	61.30	68.20	-6.90	Peak


802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

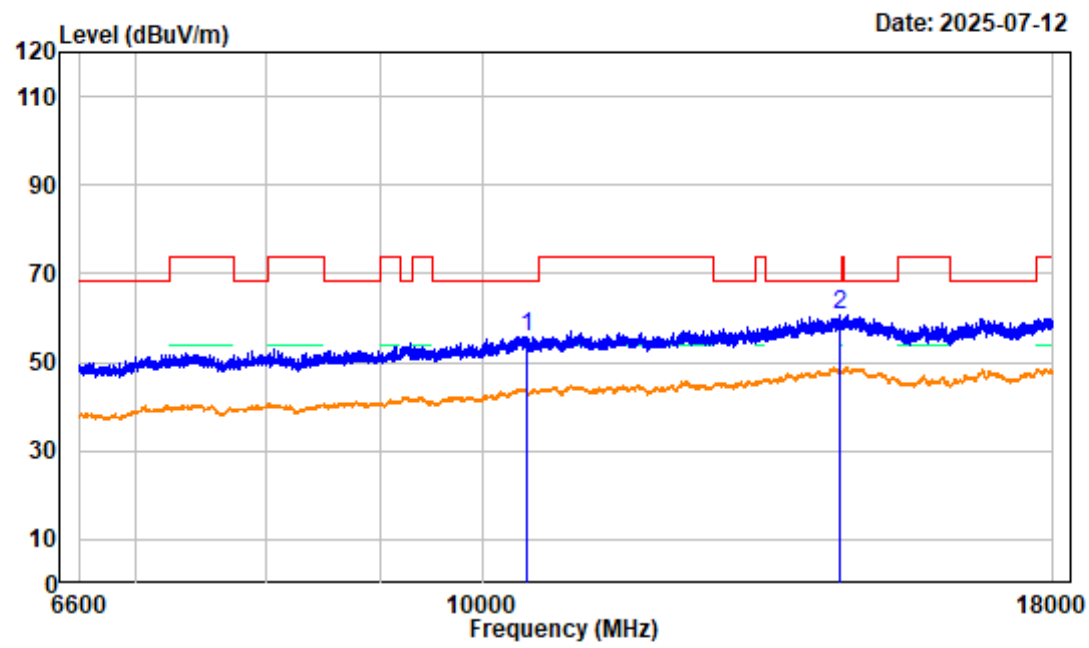

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5230MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.330	4.17	51.60	55.77	68.20	-12.43	Peak
2 14457.450	8.44	52.43	60.87	68.20	-7.33	Peak

802.11AC40 High Channel Bandedge_HORIZONTAL

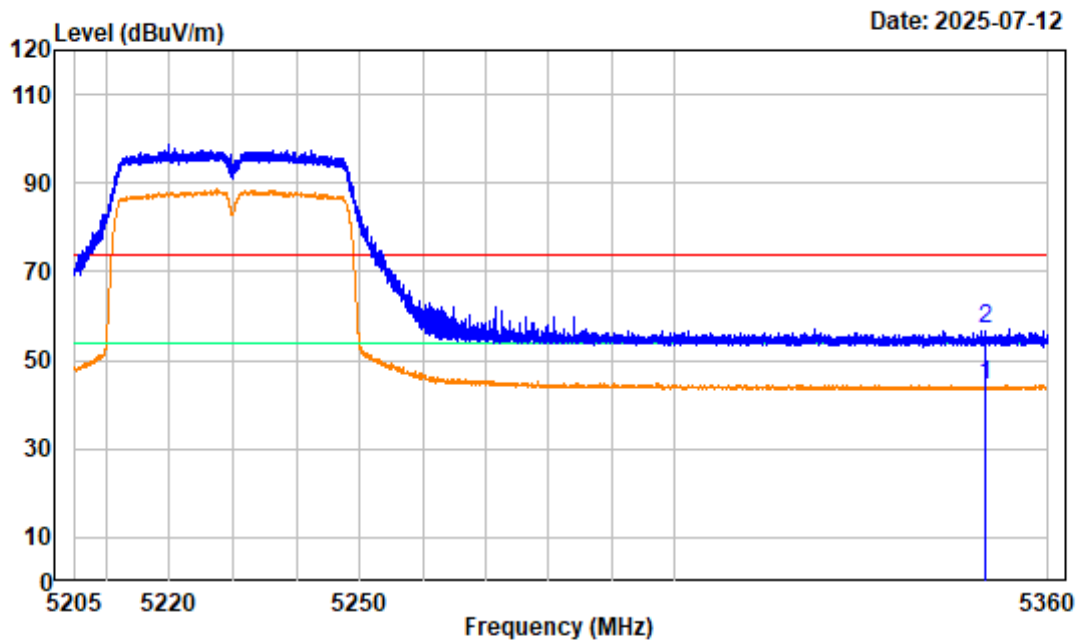

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.35	44.54	54.00	-9.46 average
2	5350.000	-5.81	63.03	57.22	74.00	-16.78 peak


802.11AC40 High Channel Bandedge_VERTICAL

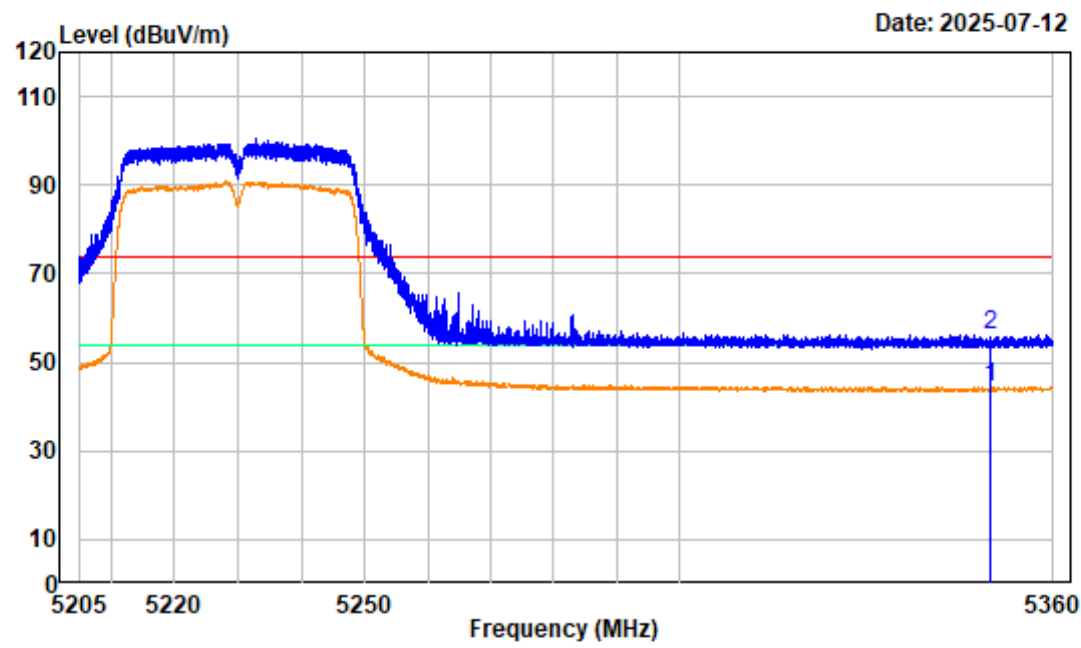

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5230MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.25	44.44	54.00	-9.56 average
2	5350.000	-5.81	61.92	56.11	74.00	-17.89 peak


802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

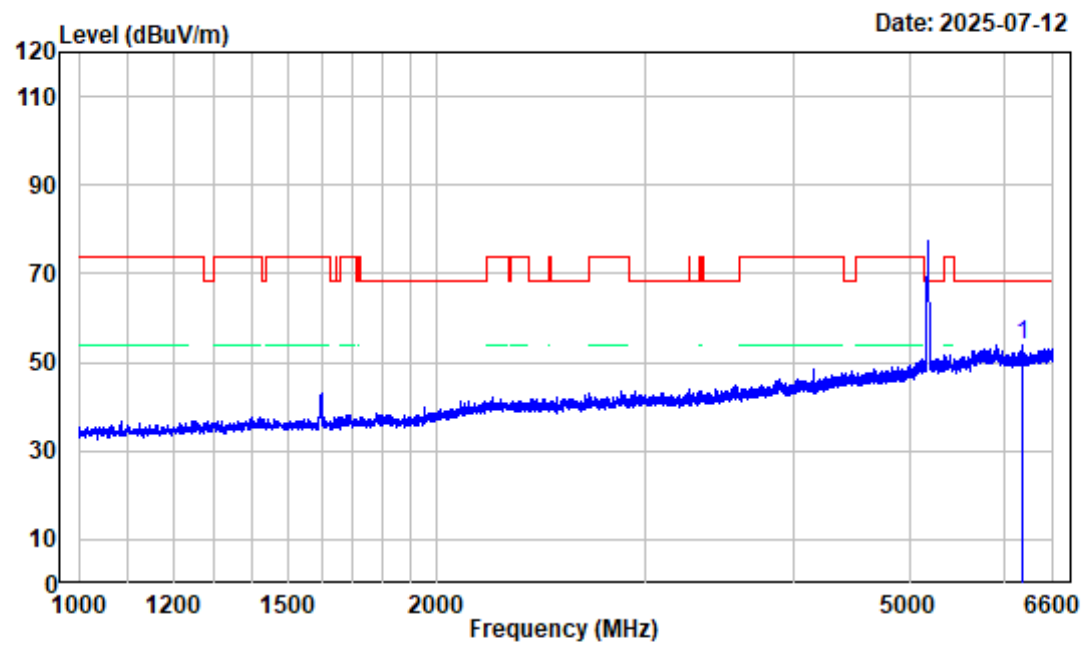

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6218.500	-4.66	58.52	53.86	68.20	-14.34 Peak

802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

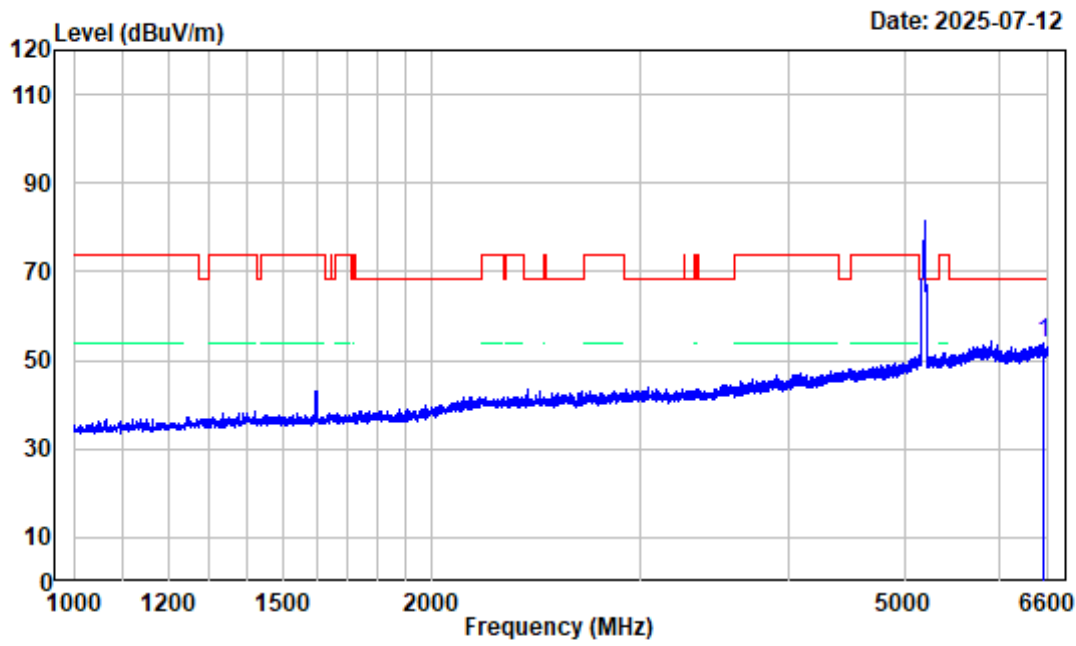

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6545.400	-3.73	57.76	54.03	68.20	-14.17 Peak


802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

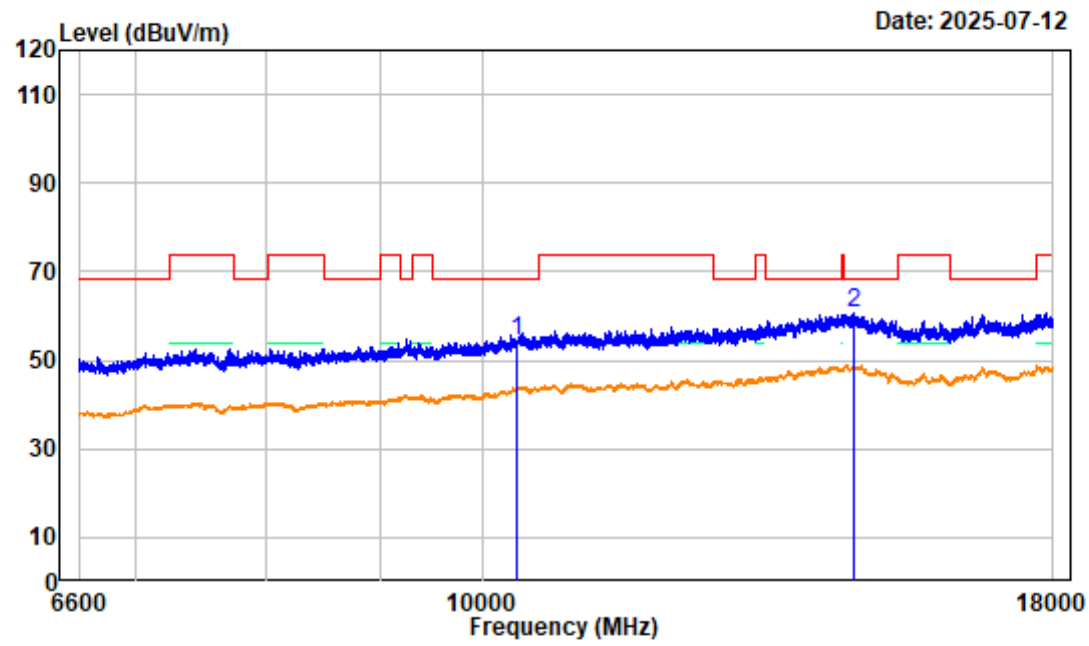

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.580	3.85	50.35	54.20	68.20	-14.00	Peak
2 14658.380	8.49	52.38	60.87	68.20	-7.33	Peak


802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

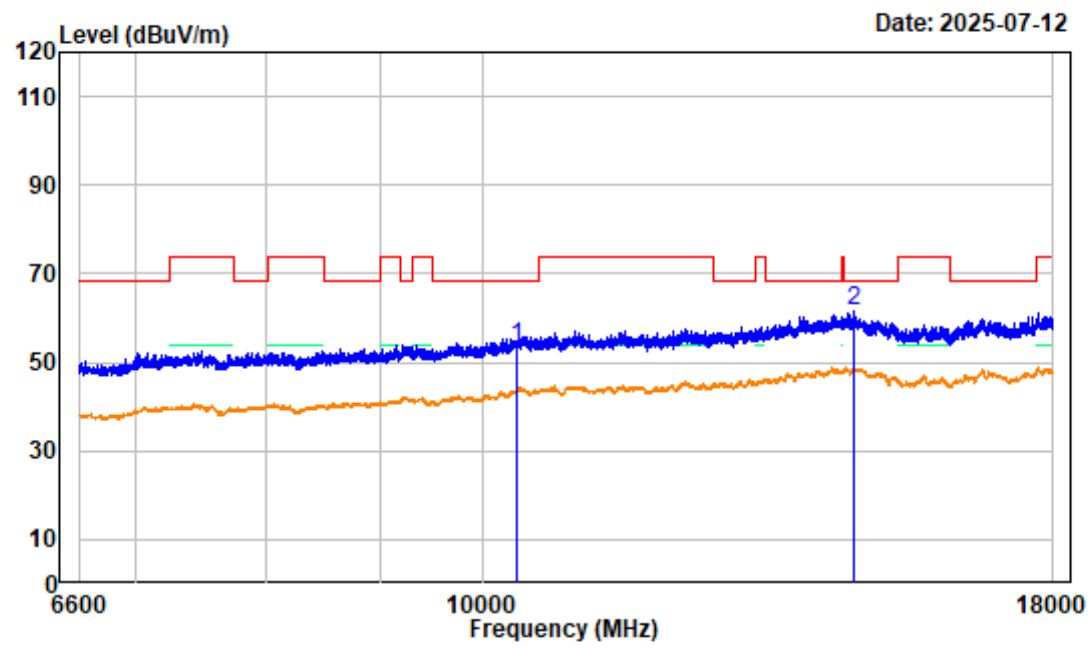

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.580	3.85	49.41	53.26	68.20	-14.94	Peak
2 14664.080	8.44	52.96	61.40	68.20	-6.80	Peak


802.11AX20 Low Channel Bandedge_HORIZONTAL

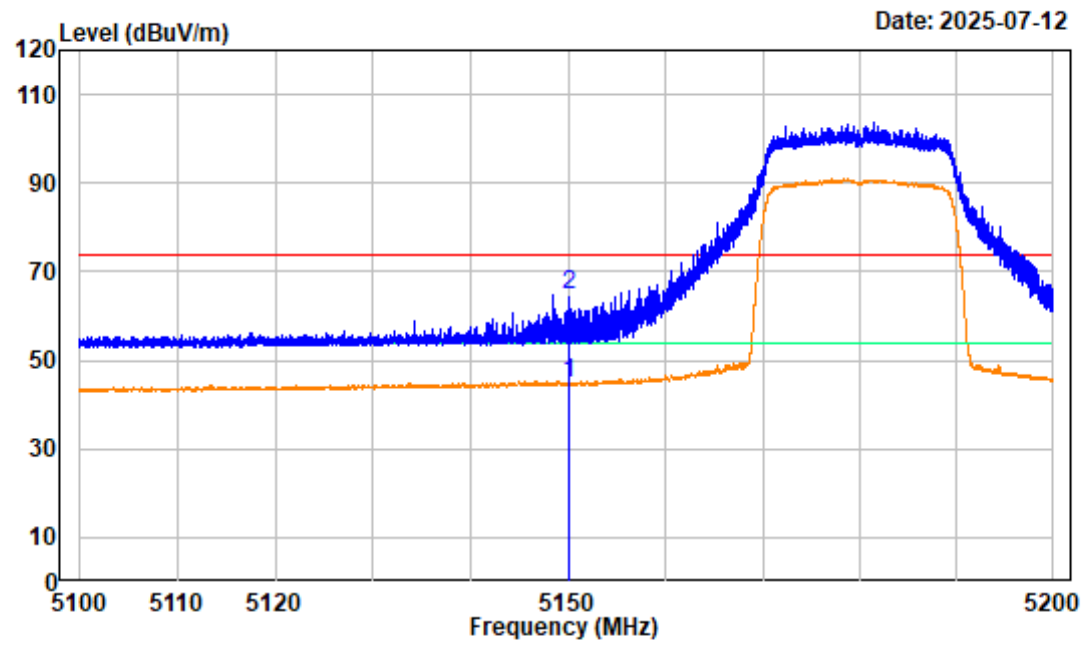

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.00	45.01	54.00	-8.99 average
2	5150.000	-5.99	70.97	64.98	74.00	-9.02 peak


802.11AX20 Low Channel Bandedge_VERTICAL

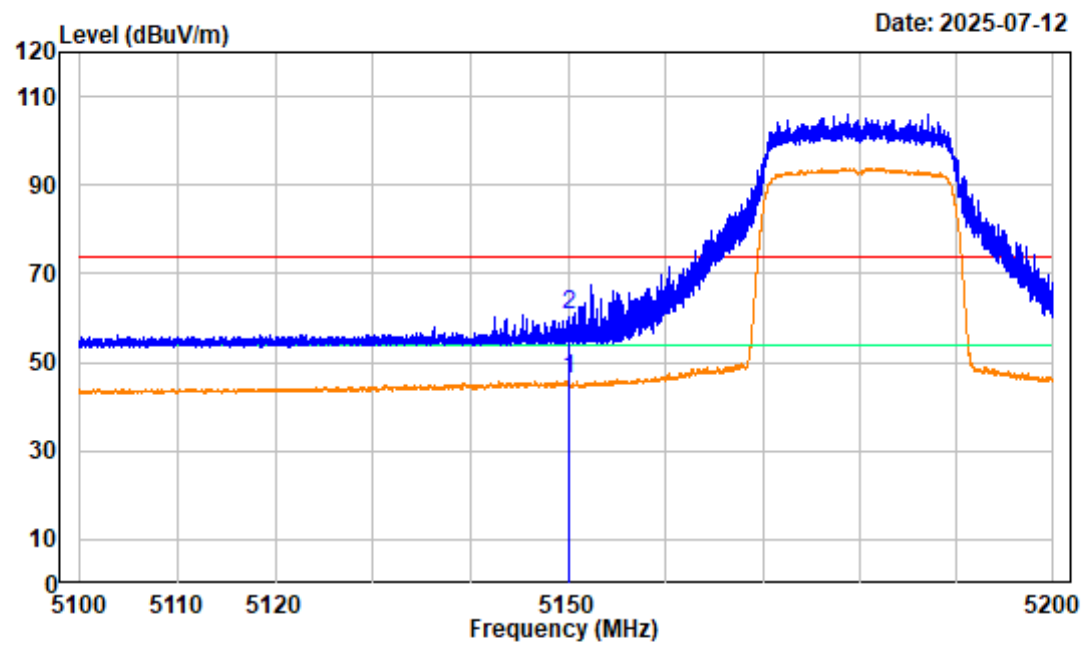

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.96	45.97	54.00	-8.03 average
2	5150.000	-5.99	66.85	60.86	74.00	-13.14 peak

802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

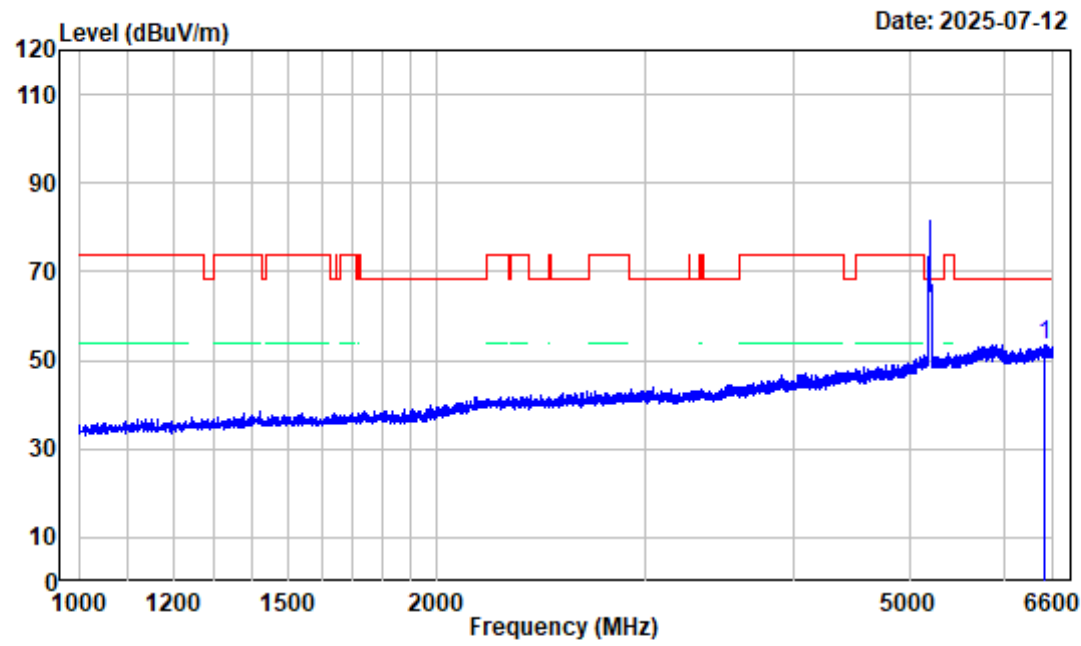

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX20 Middle Channel 5200MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6485.900	-3.75	57.16	53.41	68.20	-14.79 Peak


802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

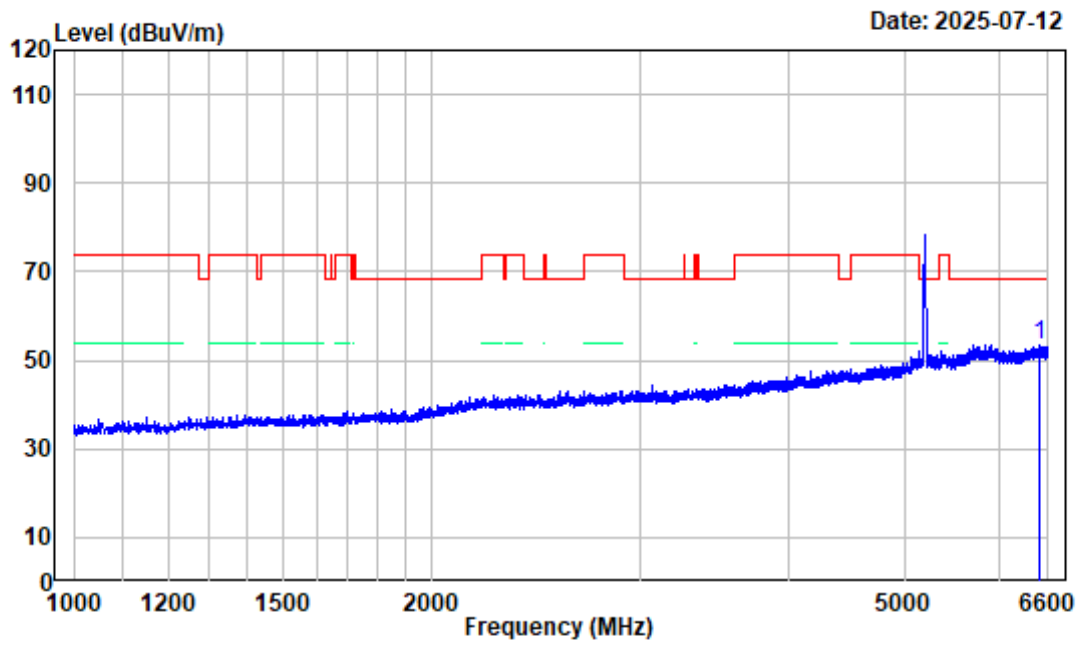

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6489.400	-3.78	57.43	53.65	68.20	-14.55 Peak


802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

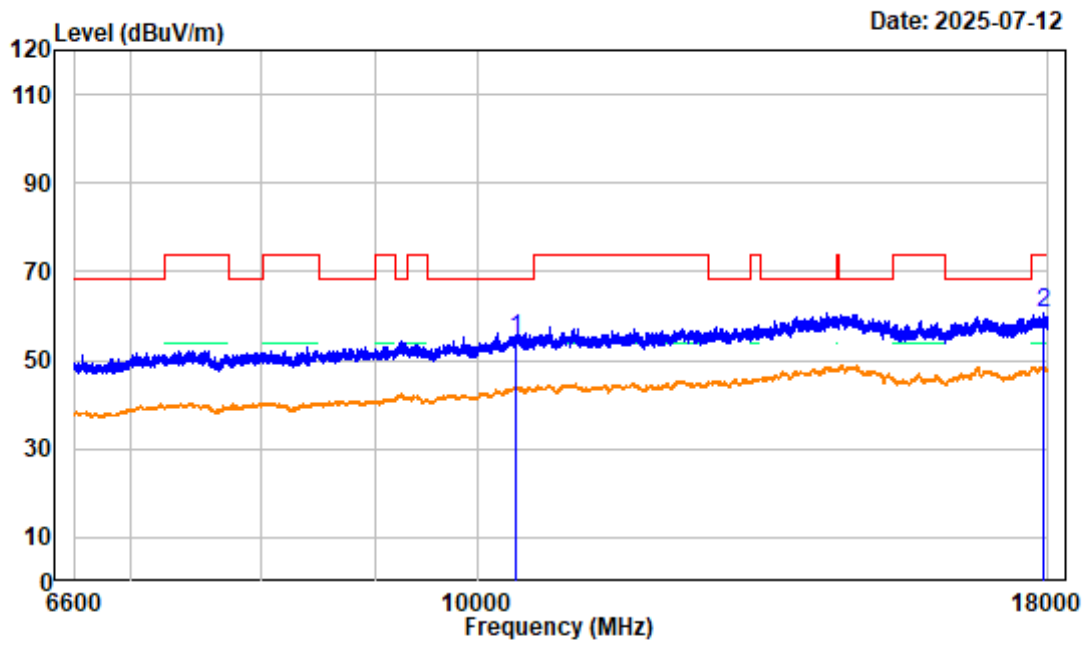

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.470	4.10	50.48	54.58	68.20	-13.62	Peak
2 17907.380	8.22	52.28	60.50	74.00	-13.50	Peak


802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

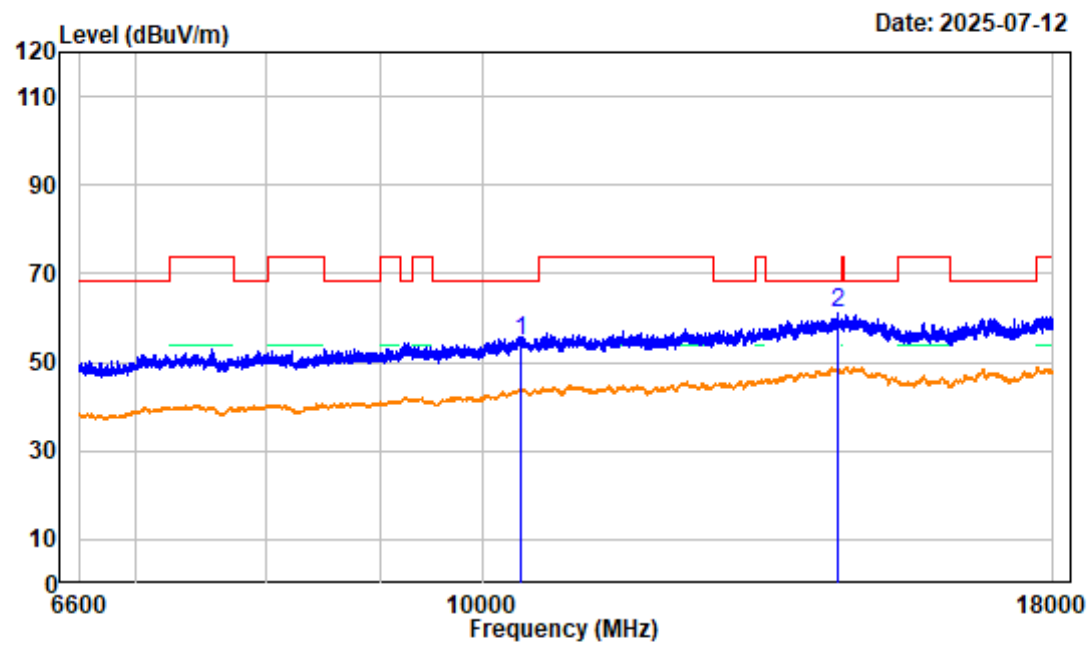

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.470	4.10	50.71	54.81	68.20	-13.39	Peak
2 14427.530	8.47	52.48	60.95	68.20	-7.25	Peak


802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

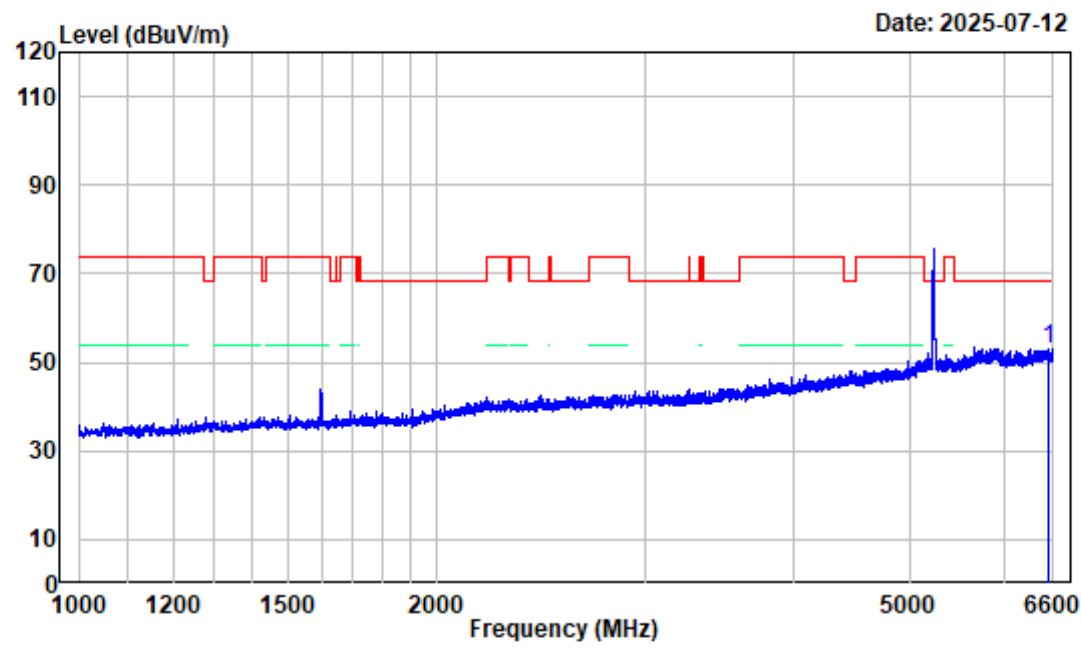

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6531.400	-3.76	56.93	53.17	68.20	-15.03 Peak

802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

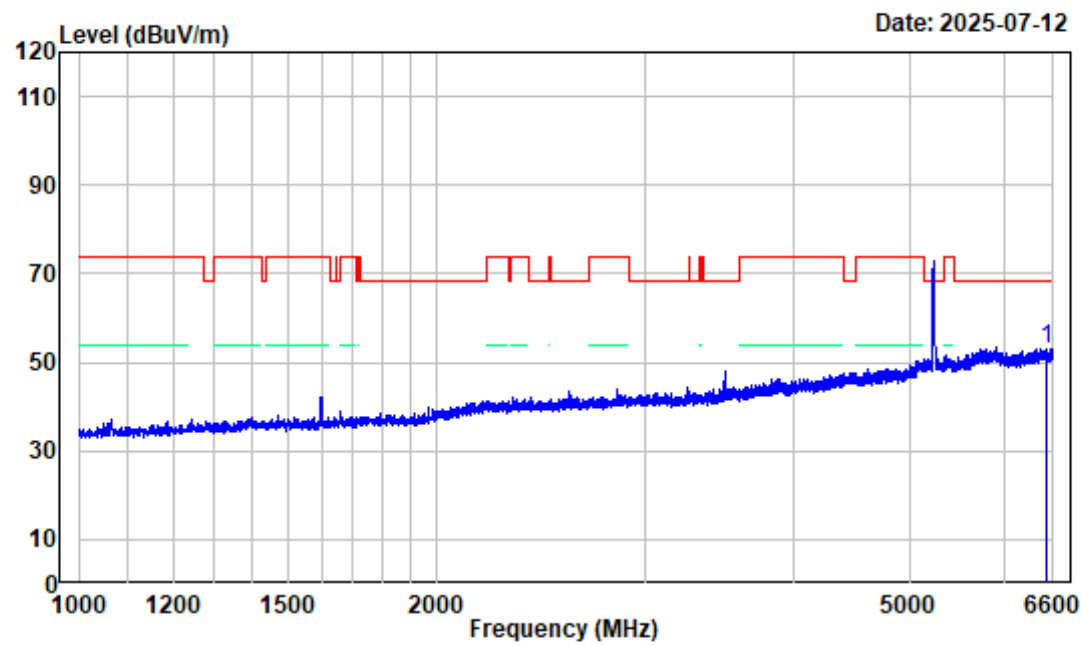

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX20 High Channel 5240MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6511.800	-3.80	56.80	53.00	68.20	-15.20 Peak

802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

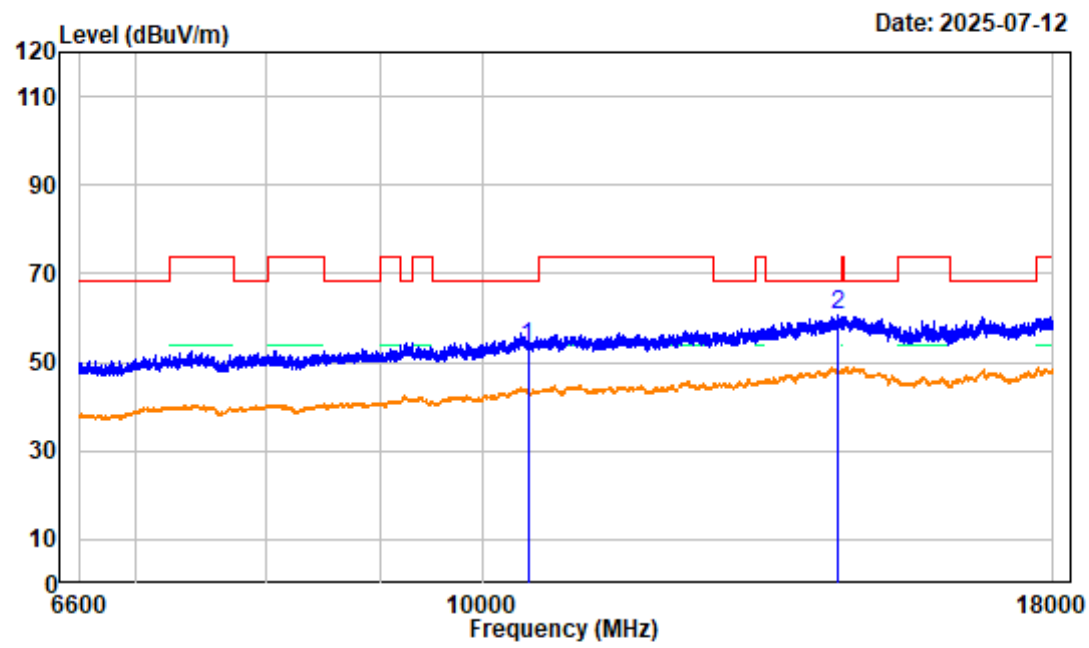

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.280	3.92	49.61	53.53	68.20	-14.67	Peak
2 14410.420	8.46	52.09	60.55	68.20	-7.65	Peak


802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

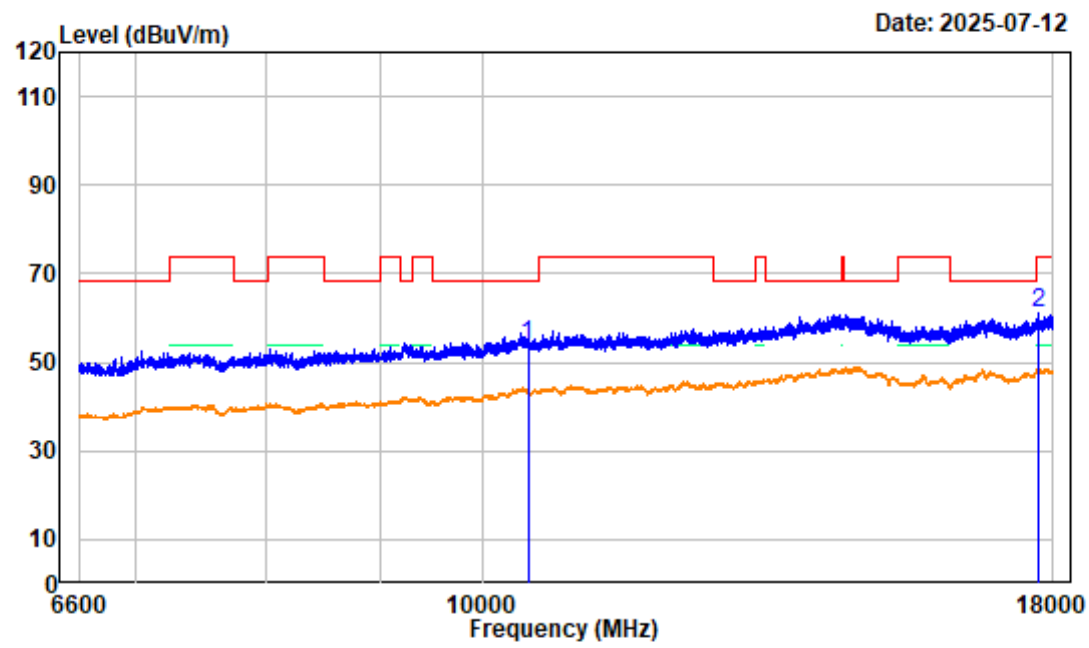

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5240MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.280	3.92	49.89	53.81	68.20	-14.39	Peak
2 17724.970	7.67	53.51	61.18	74.00	-12.82	Peak


802.11AX20 High Channel Bandedge_HORIZONTAL

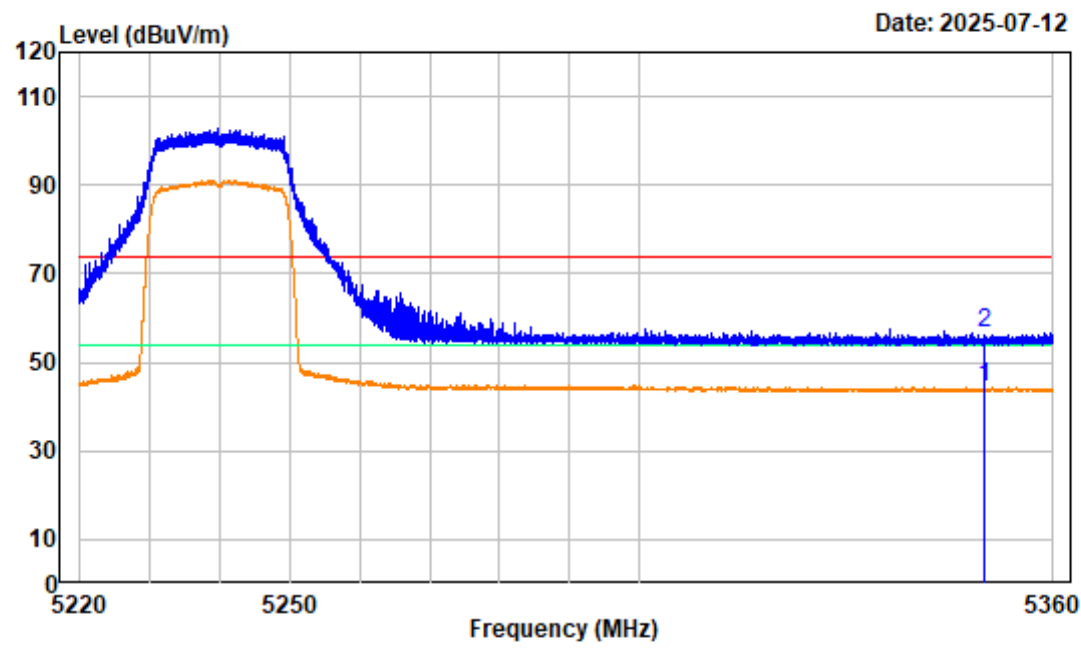

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5240MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.09	44.28	54.00	-9.72 average
2	5350.000	-5.81	62.47	56.66	74.00	-17.34 peak


802.11AX20 High Channel Bandedge_VERTICAL

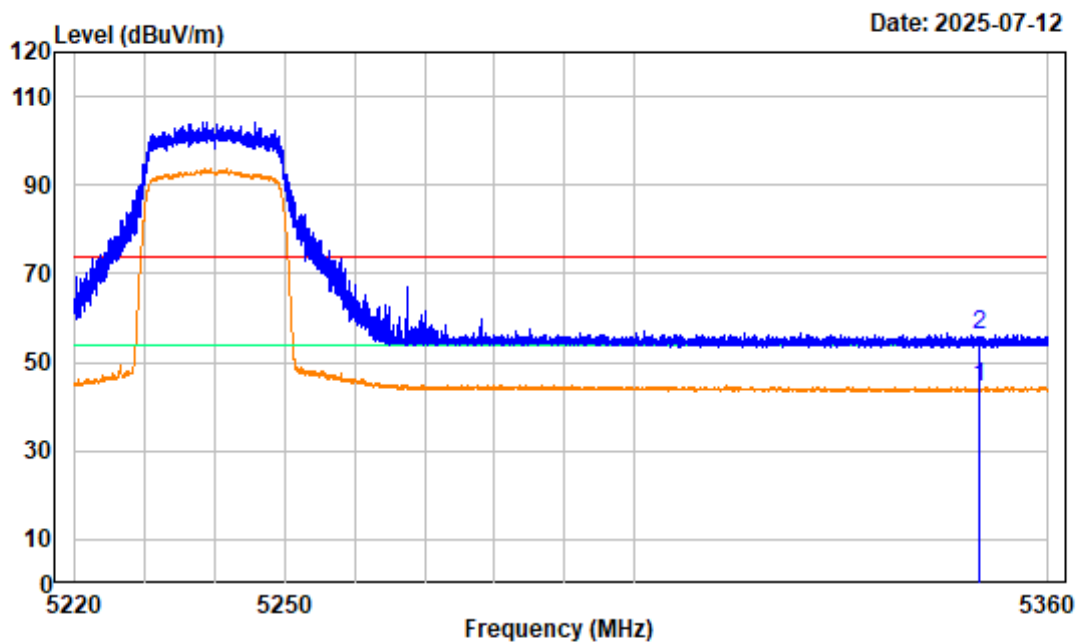

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504V06524E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.18	44.37	54.00	-9.63	average
2	5350.000	-5.81	62.17	56.36	74.00	-17.64	peak


802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

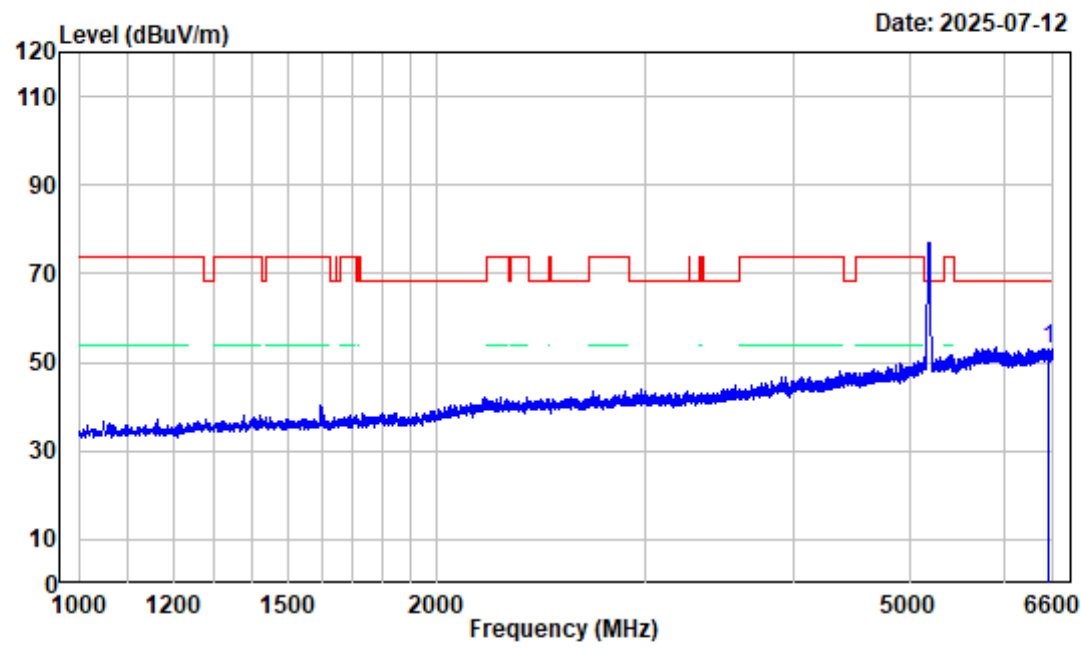

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6540.500	-3.74	56.70	52.96	68.20	-15.24 Peak


802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

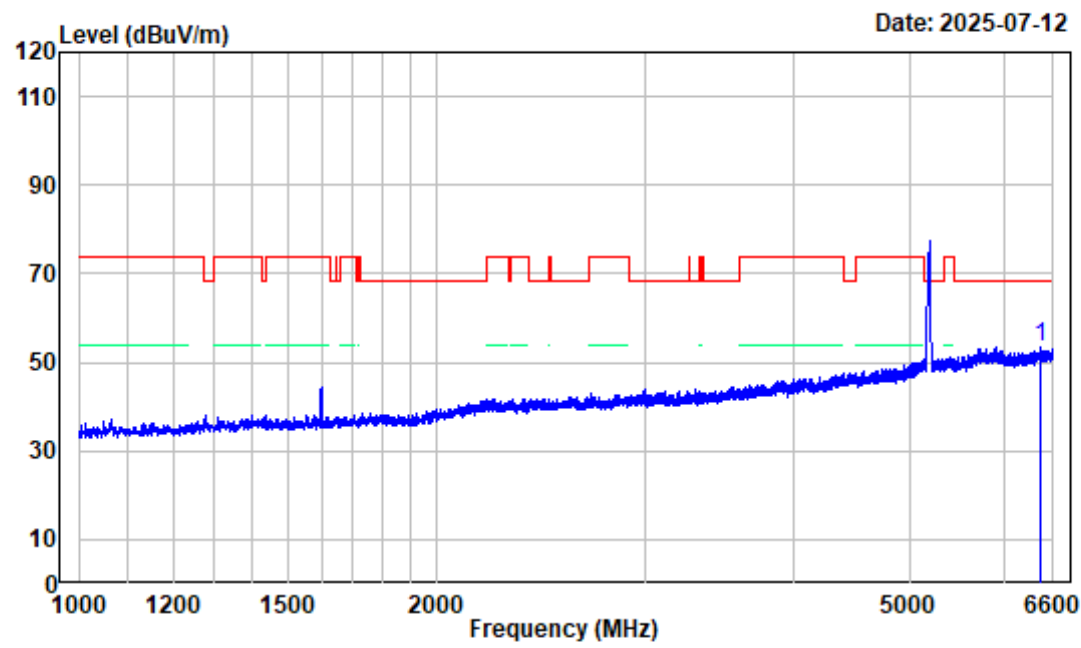

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5190MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6446.700	-3.61	57.16	53.55	68.20	-14.65 Peak


802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

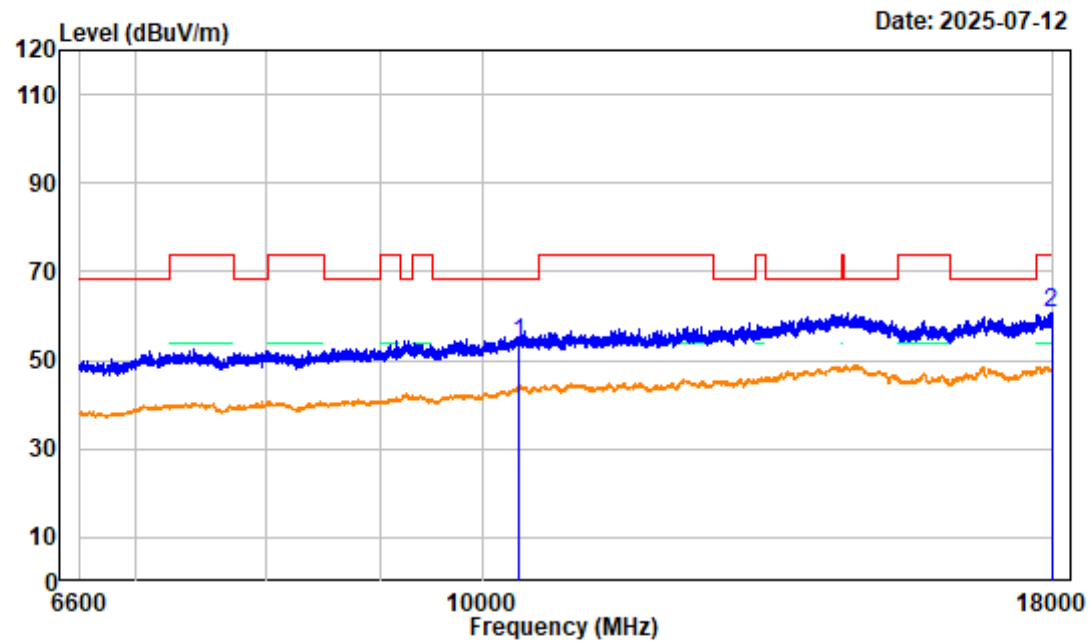

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5190MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.530	3.97	50.01	53.98	68.20	-14.22	Peak
2 17971.500	8.25	52.38	60.63	74.00	-13.37	Peak


802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

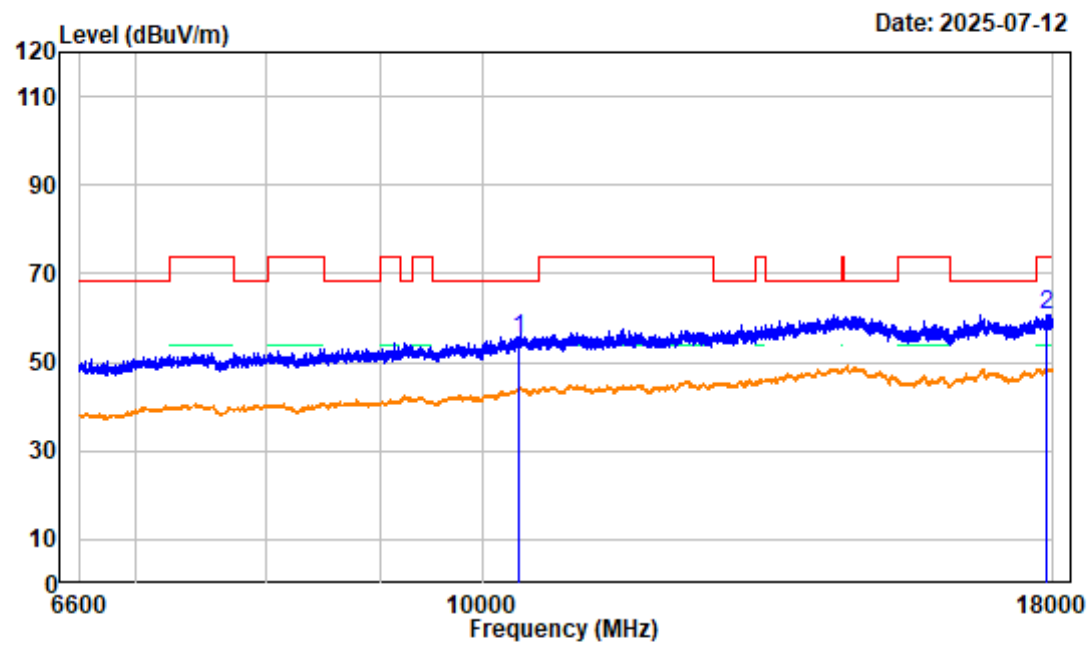

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5190MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.530	3.97	51.28	55.25	68.20	-12.95	Peak
2 17883.150	8.24	52.48	60.72	74.00	-13.28	Peak


802.11AX40 Low Channel Bandedge_HORIZONTAL

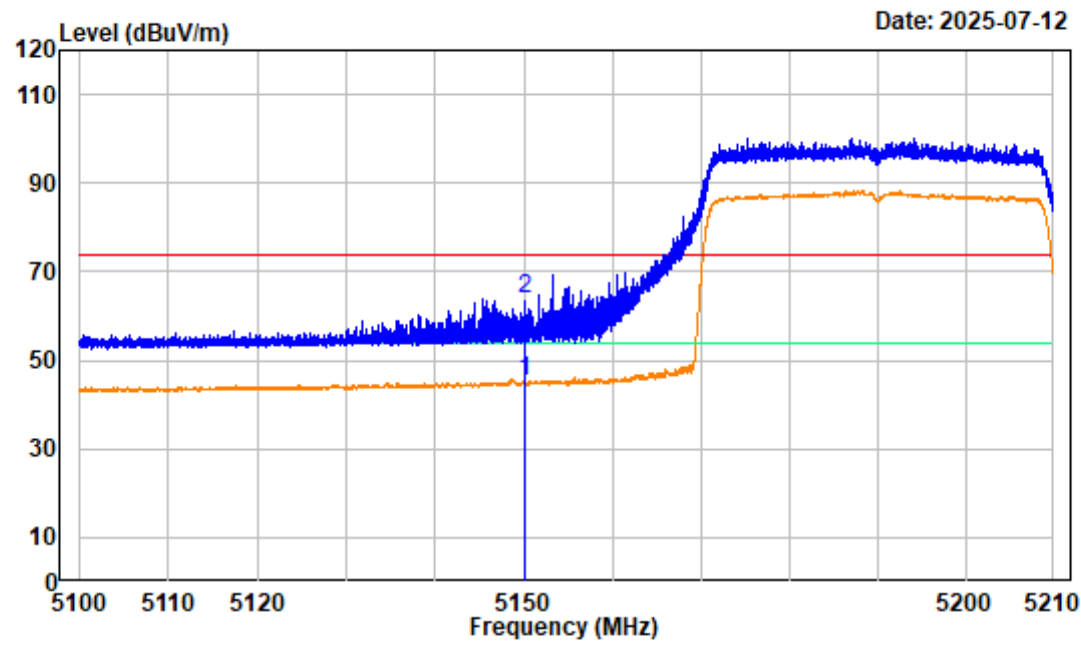

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5190MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	51.48	45.49	54.00	-8.51 Average
2	5150.000	-5.99	69.87	63.88	74.00	-10.12 peak


802.11AX40 Low Channel Bandedge_VERTICAL

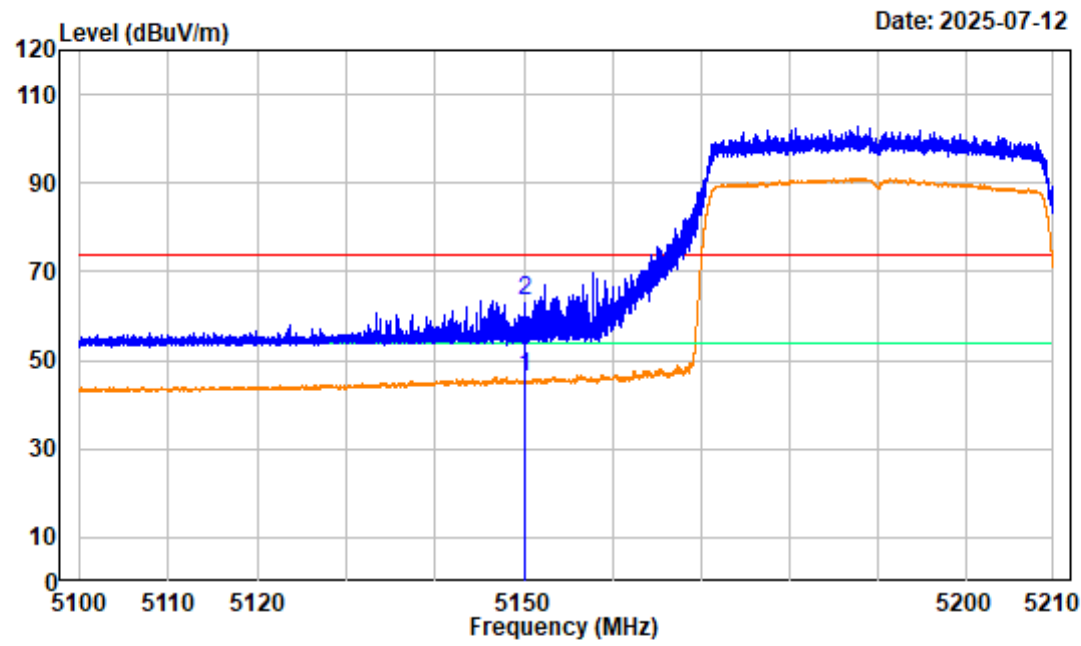

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5190MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	52.04	46.05	54.00	-7.95 Average
2	5150.000	-5.99	69.53	63.54	74.00	-10.46 peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

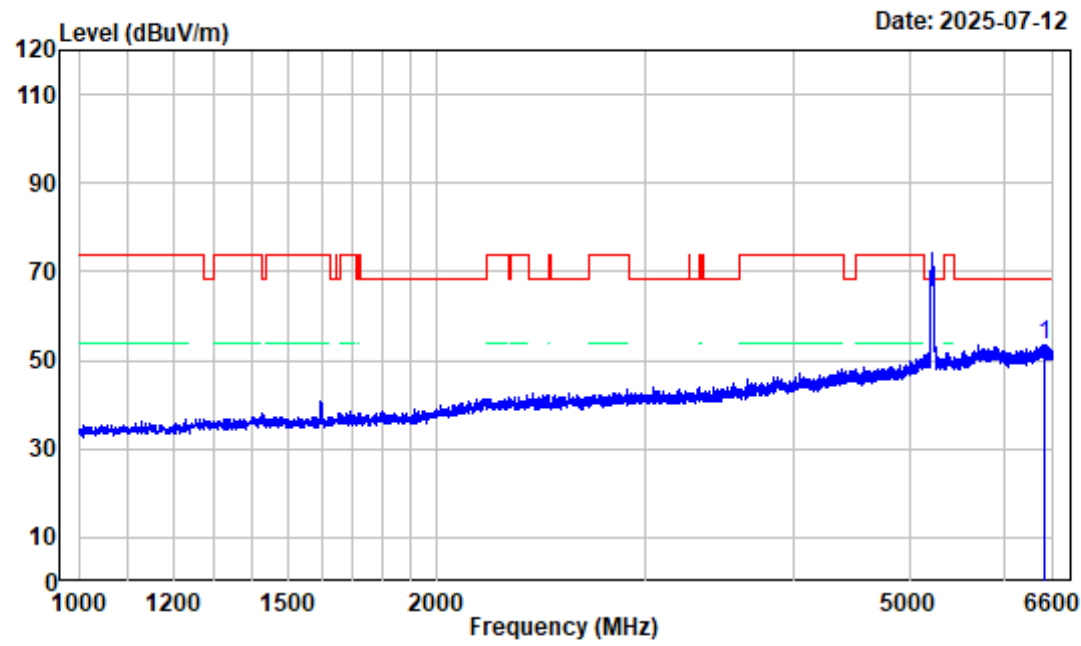

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6501.300	-3.82	57.39	53.57	68.20	-14.63 Peak


802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

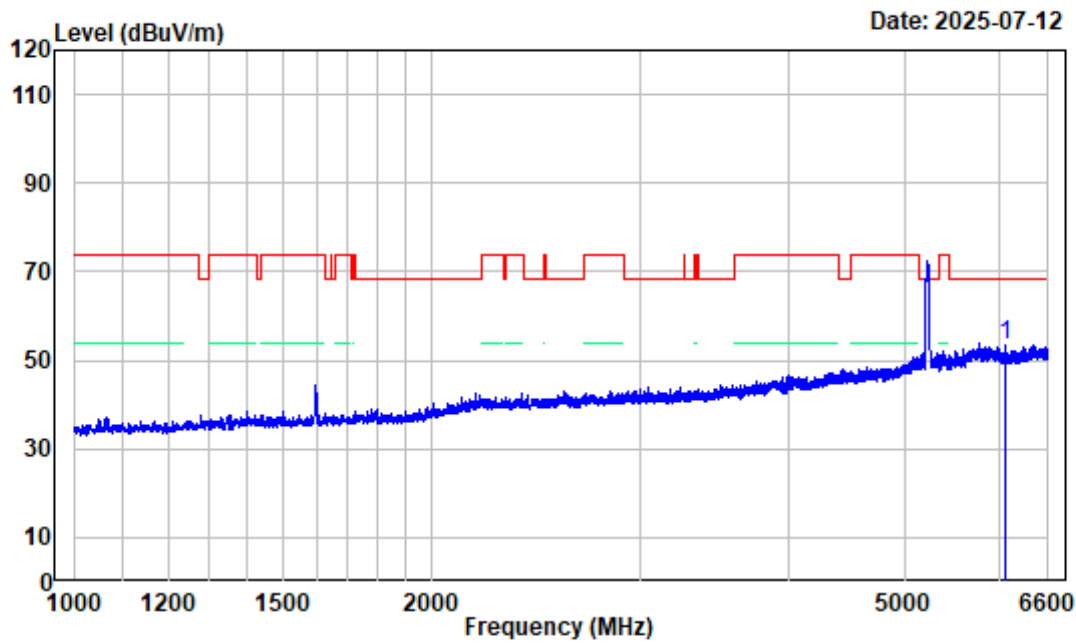

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5230MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6070.800	-4.93	58.33	53.40	68.20	-14.80 Peak


802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

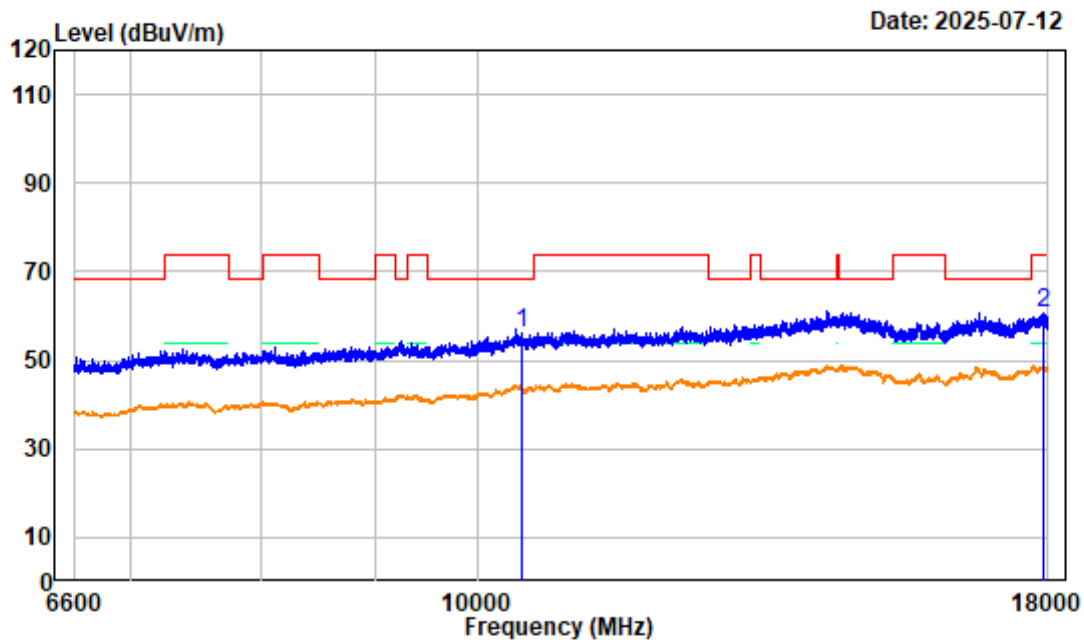

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5230MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.330	4.17	51.89	56.06	68.20	-12.14	Peak
2 17901.680	8.24	52.35	60.59	74.00	-13.41	Peak


802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

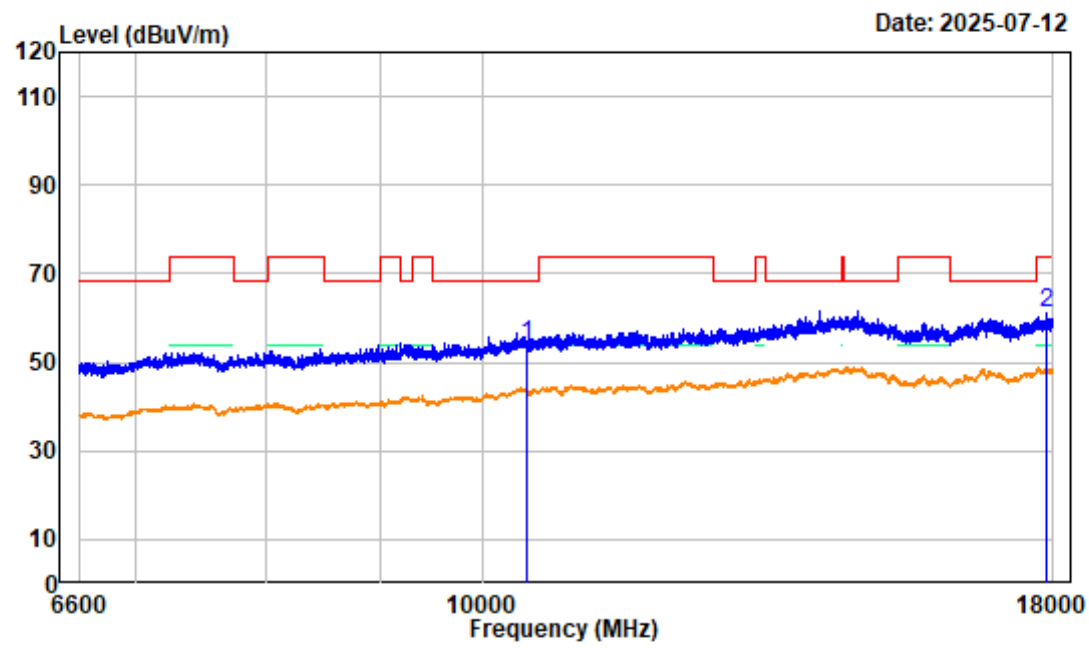

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5230MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.330	4.17	49.84	54.01	68.20	-14.19	Peak
2 17876.030	8.24	52.69	60.93	74.00	-13.07	Peak


802.11AX40 High Channel Bandedge_HORIZONTAL

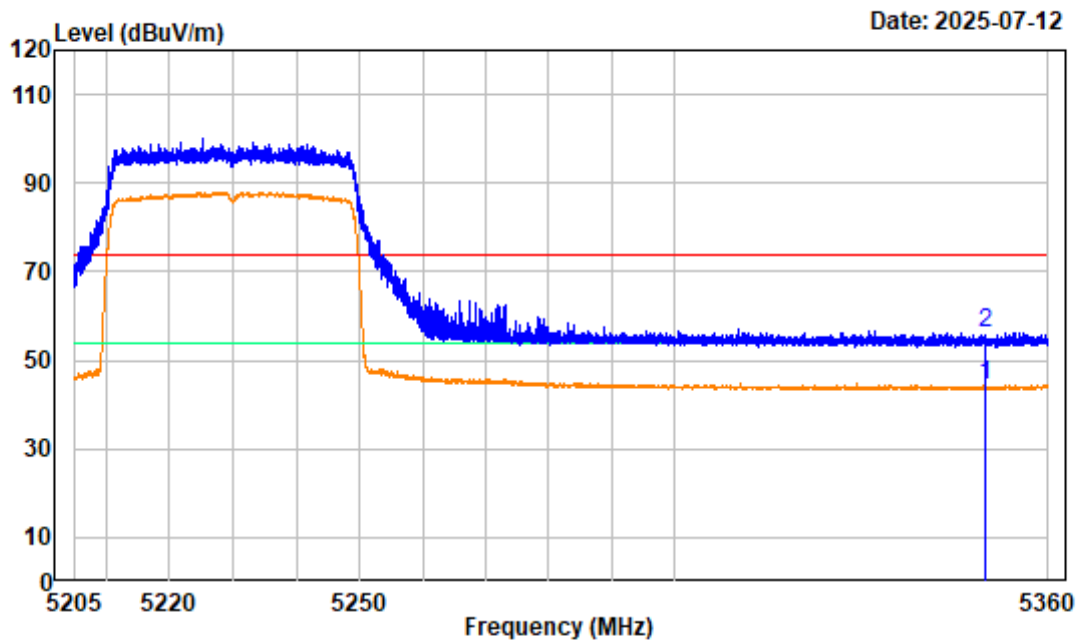

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5230MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.29	44.48	54.00	-9.52 average
2	5350.000	-5.81	62.08	56.27	74.00	-17.73 peak

802.11AX40 High Channel Bandedge_VERTICAL

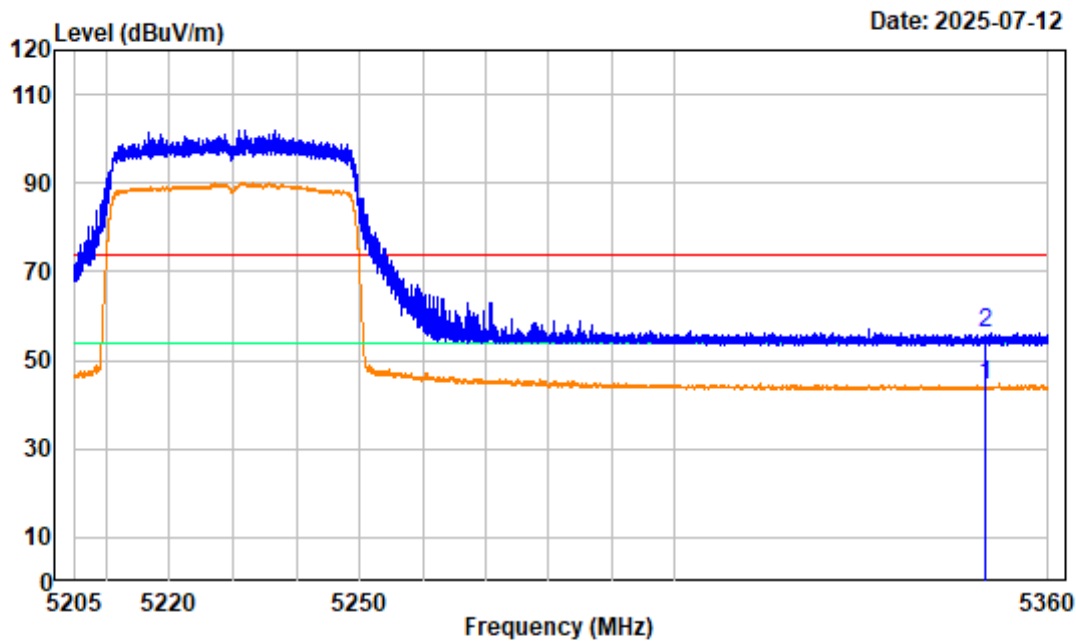


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5230MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.01	44.20	54.00	-9.80 average
2	5350.000	-5.81	61.79	55.98	74.00	-18.02 peak

For Band2:


802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

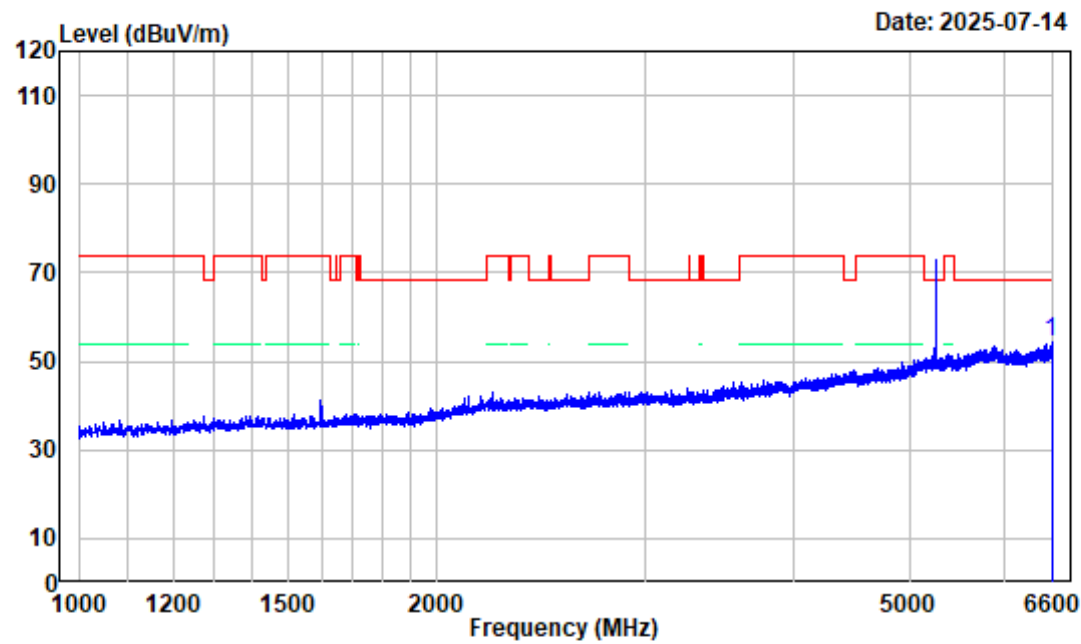

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6580.400	-3.62	57.97	54.35	68.20	-13.85	Peak


802.11A Low Channel 1GHz-6.6GHz_VERTICAL

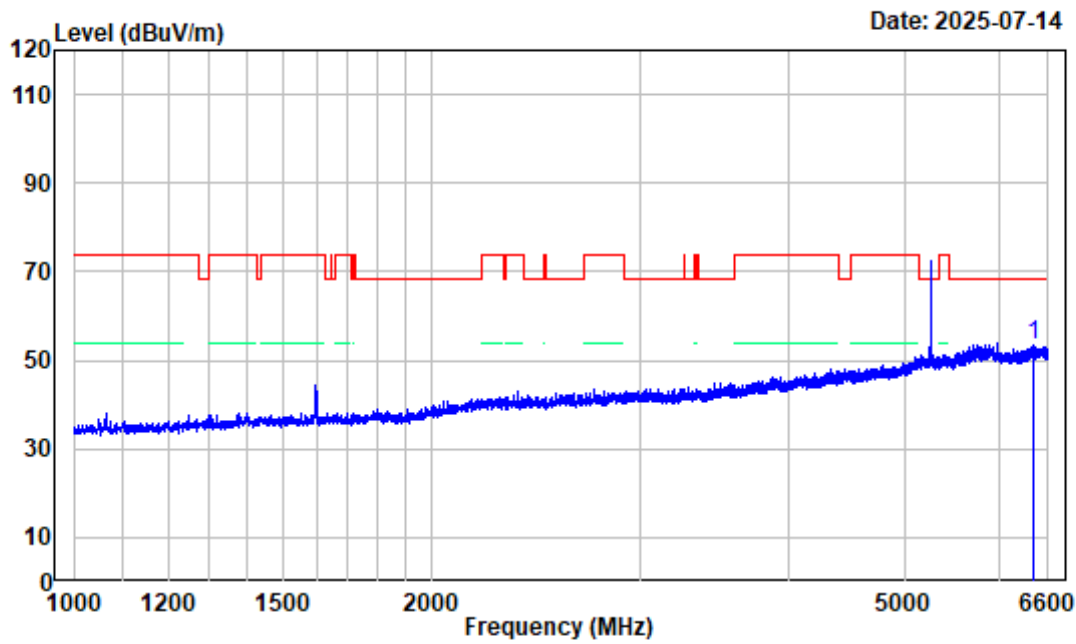

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6411.000	-3.65	56.96	53.31	68.20	-14.89 Peak


802.11A Low Channel 6.6GHz-18GHZ_HORIZONTAL

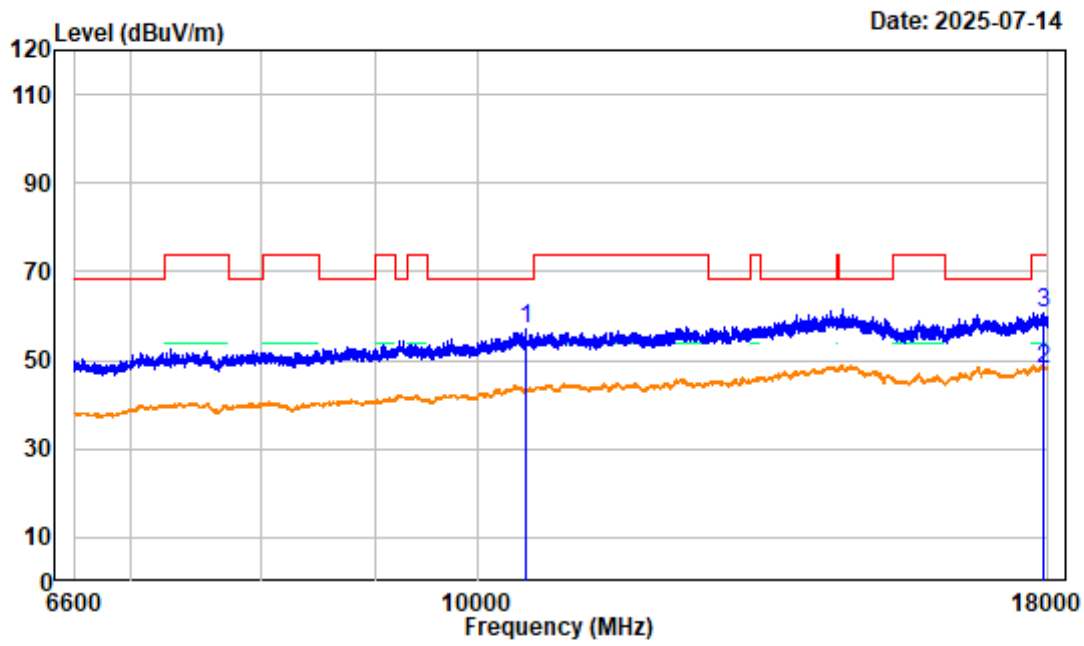

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.170	3.90	53.04	56.94	68.20	-11.26	Peak
2 17911.650	8.22	39.61	47.83	54.00	-6.17	Average
3 17911.650	8.22	52.50	60.72	74.00	-13.28	Peak


802.11A Low Channel 6.6GHz-18GHz_VERTICAL

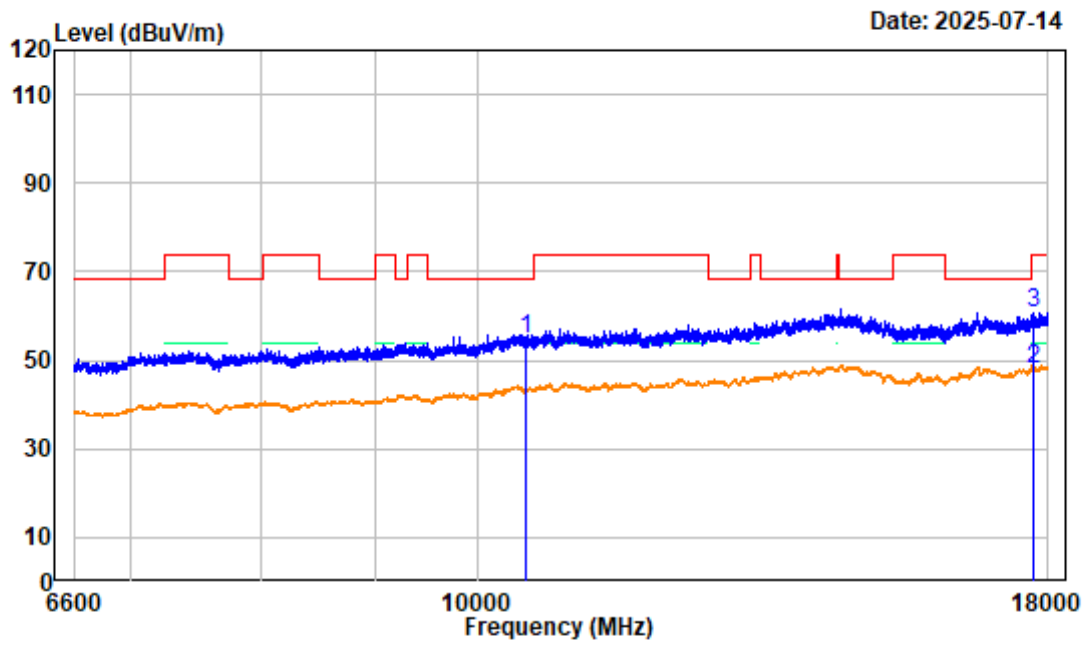

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.170	3.90	51.03	54.93	68.20	-13.27	Peak
2 17746.350	7.71	40.11	47.82	54.00	-6.18	Average
3 17746.350	7.71	52.98	60.69	74.00	-13.31	Peak


802.11A Low Channel Bandedge_HORIZONTAL

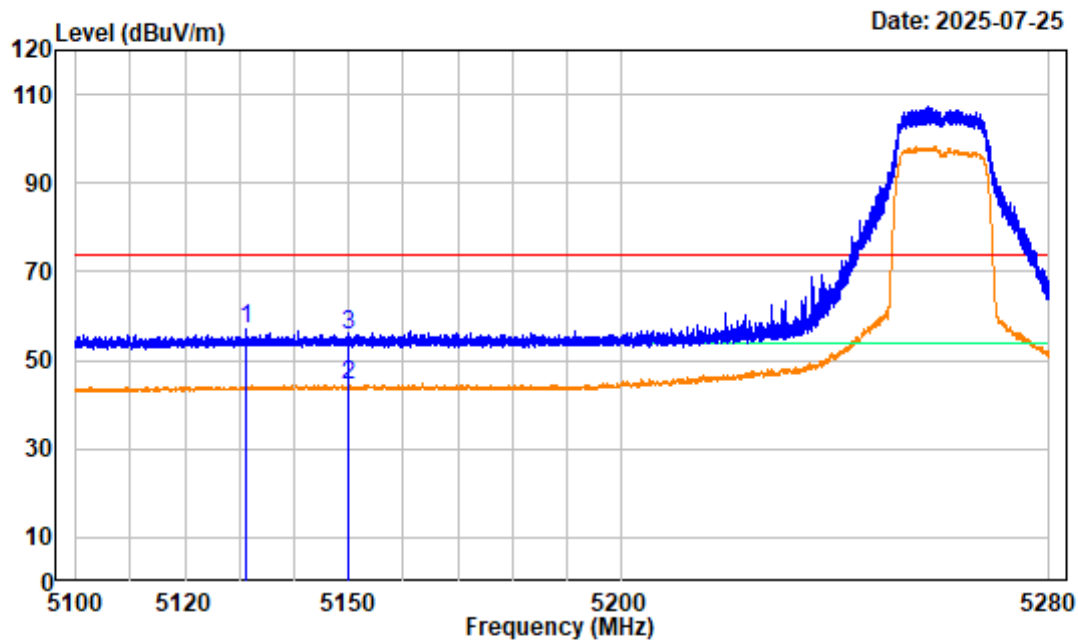

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5131.027	-6.01	63.24	57.23	74.00	-16.77 Peak
2	5149.995	-5.99	50.46	44.47	54.00	-9.53 Average
3	5149.995	-5.99	61.75	55.76	74.00	-18.24 Peak


802.11A Low Channel Bandedge_VERTICAL

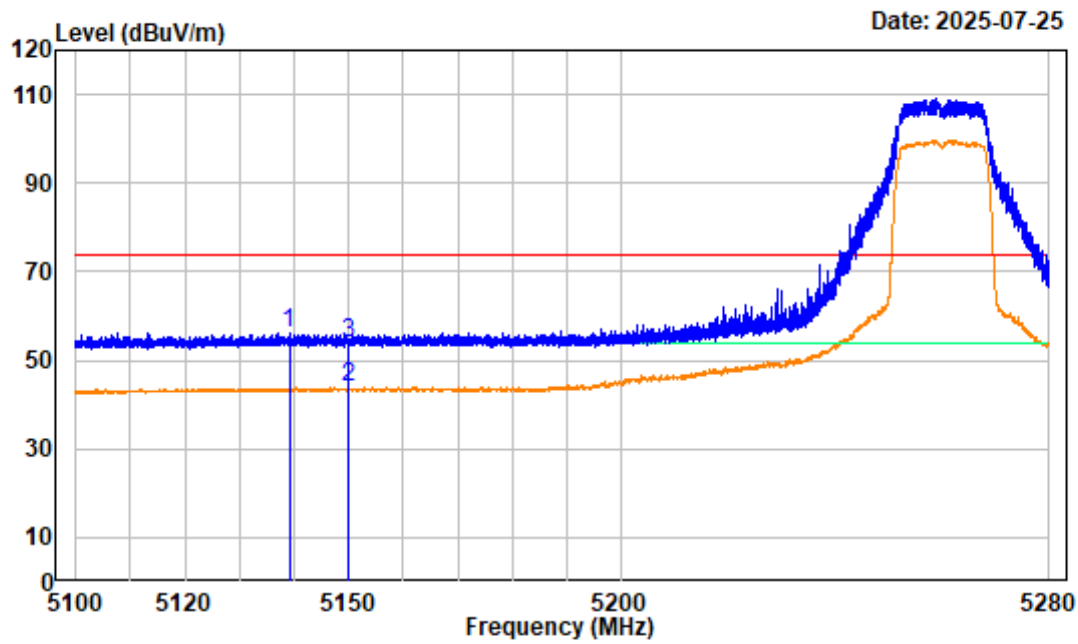

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5139.060	-6.01	62.07	56.06	74.00	-17.94 Peak
2	5149.995	-5.99	49.85	43.86	54.00	-10.14 Average
3	5149.995	-5.99	59.71	53.72	74.00	-20.28 Peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

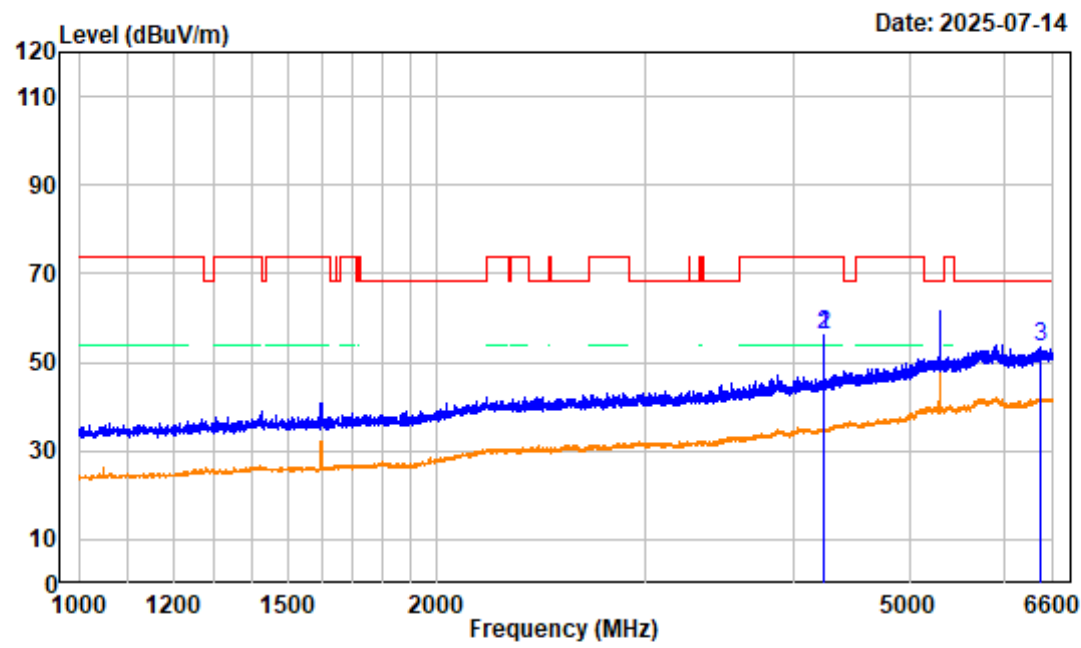

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4240.300	-7.87	63.92	56.05	74.00	-17.95 Peak
2	4240.300	-7.87	63.92	56.05	74.00	-17.95 Peak
3	6451.600	-3.62	56.97	53.35	68.20	-14.85 Peak


802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

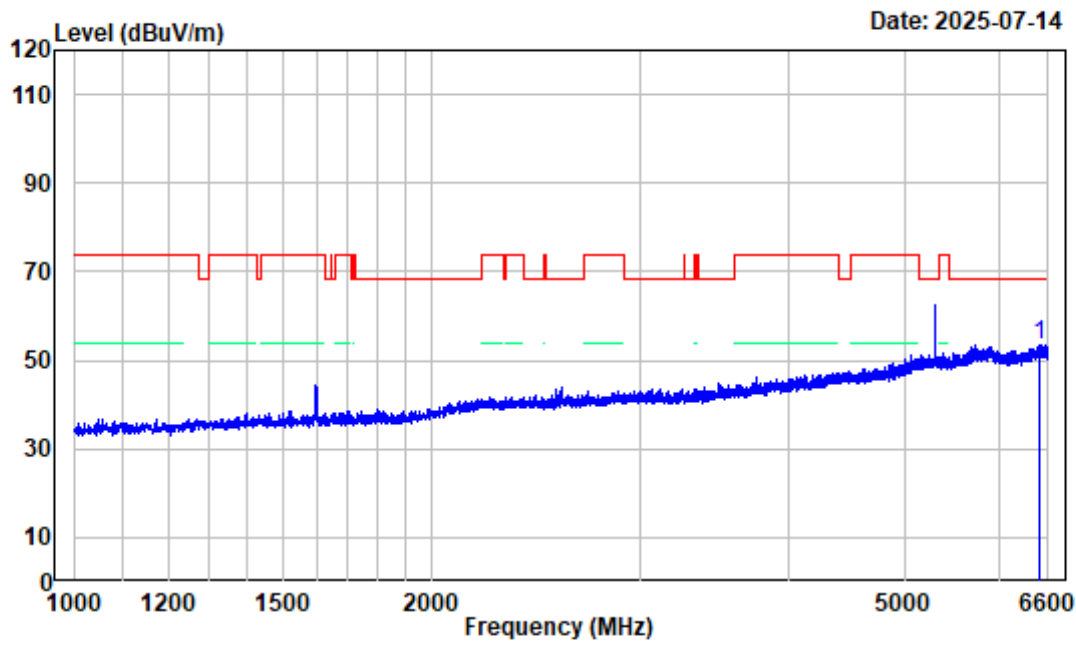

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6496.400	-3.81	57.18	53.37	68.20	-14.83	Peak


802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

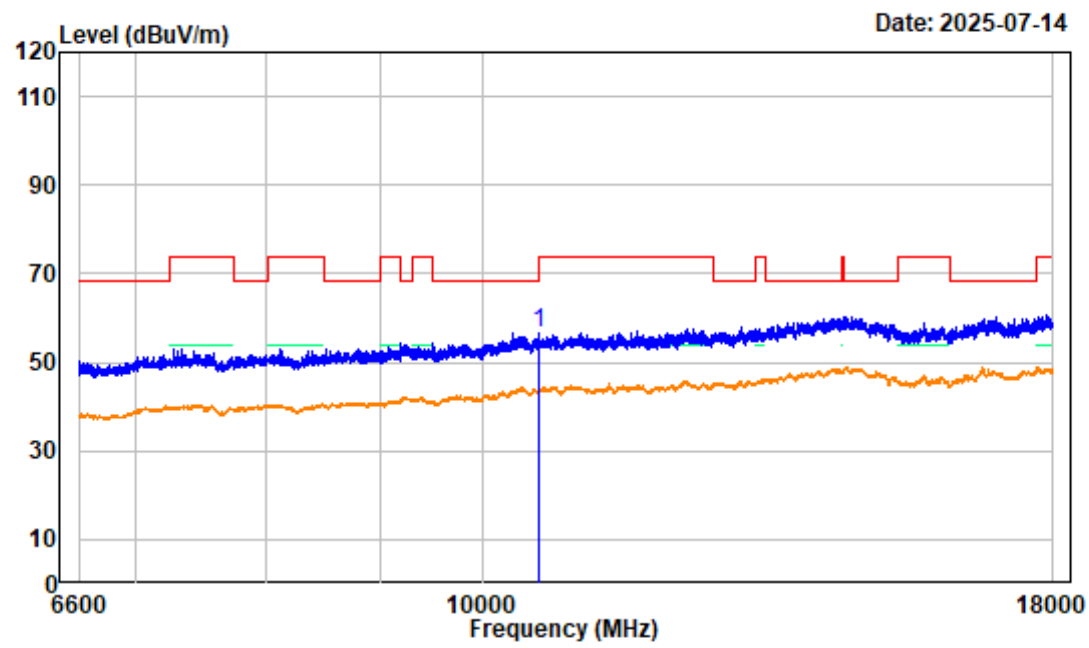

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10599.970	3.86	52.62	56.48	68.20	-11.72	Peak


802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

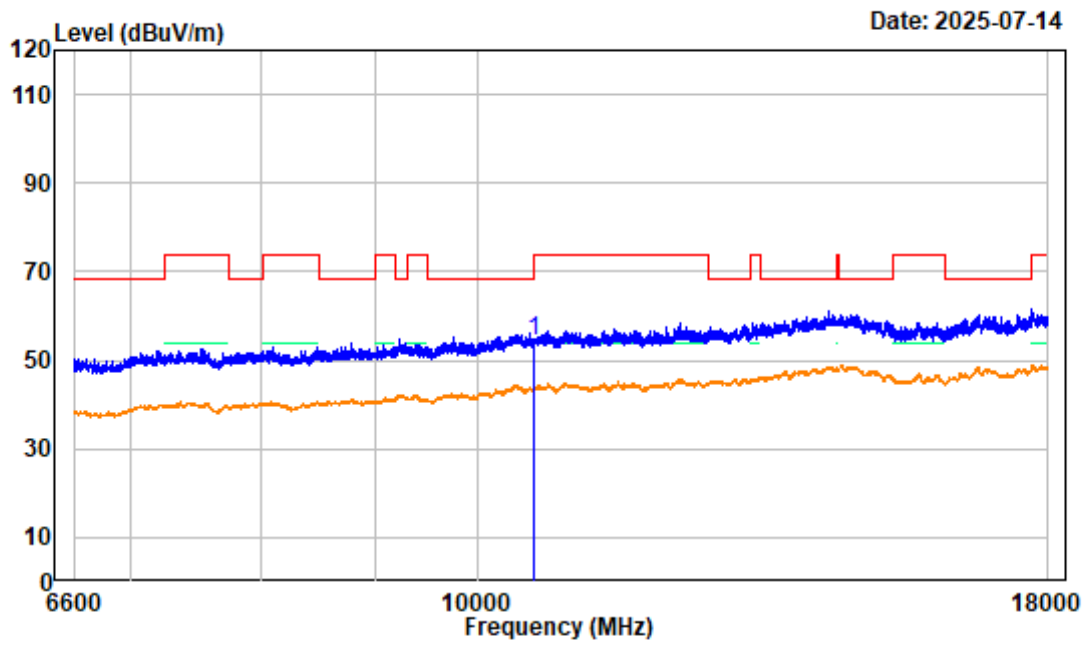

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10599.970	3.86	50.47	54.33	68.20	-13.87	Peak


802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

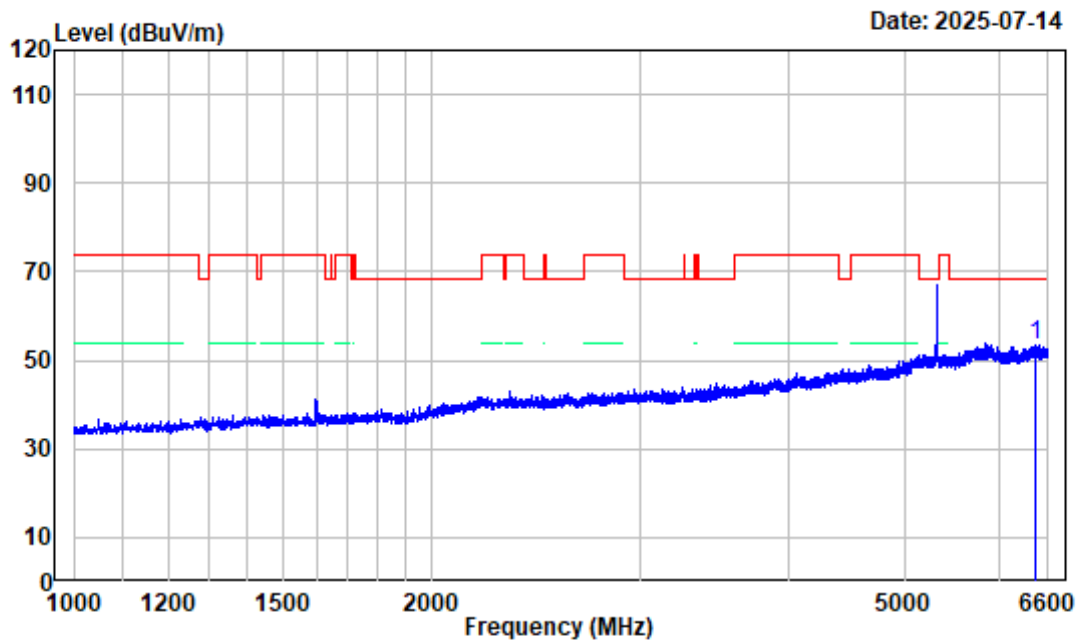

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6451.600	-3.62	57.01	53.39	68.20	-14.81 Peak


802.11A High Channel 1GHz-6.6GHz_VERTICAL

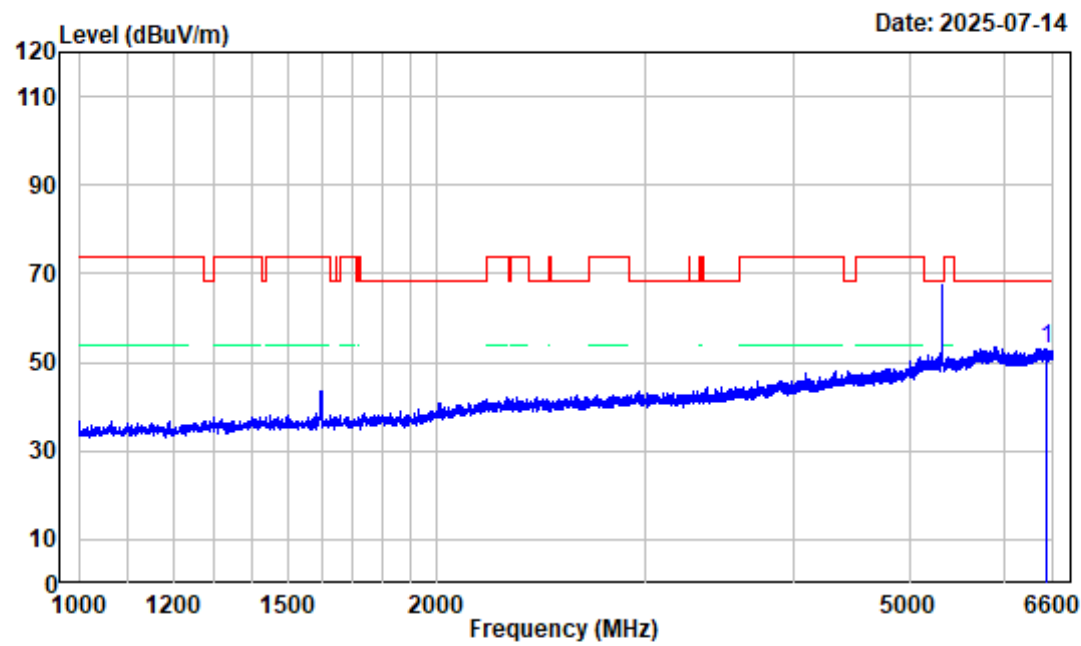

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6504.800	-3.81	56.98	53.17	68.20	-15.03 Peak


802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

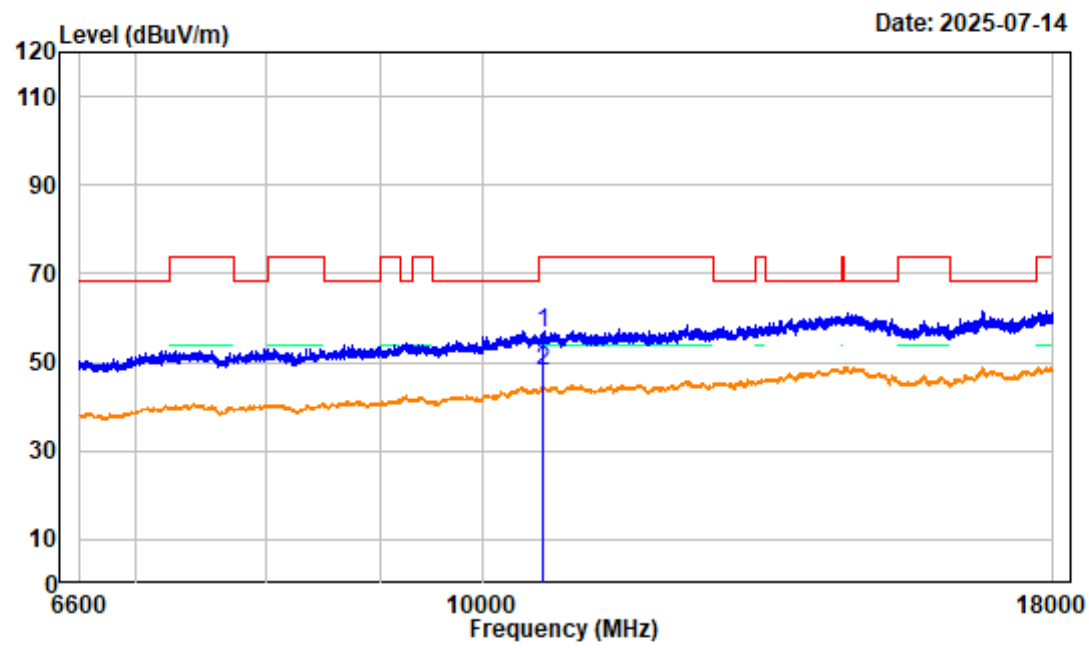

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10639.880	4.42	52.29	56.71	74.00	-17.29	Peak
2 10639.880	4.42	43.42	47.84	54.00	-6.16	Average


802.11A High Channel 6.6GHz-18GHz_VERTICAL

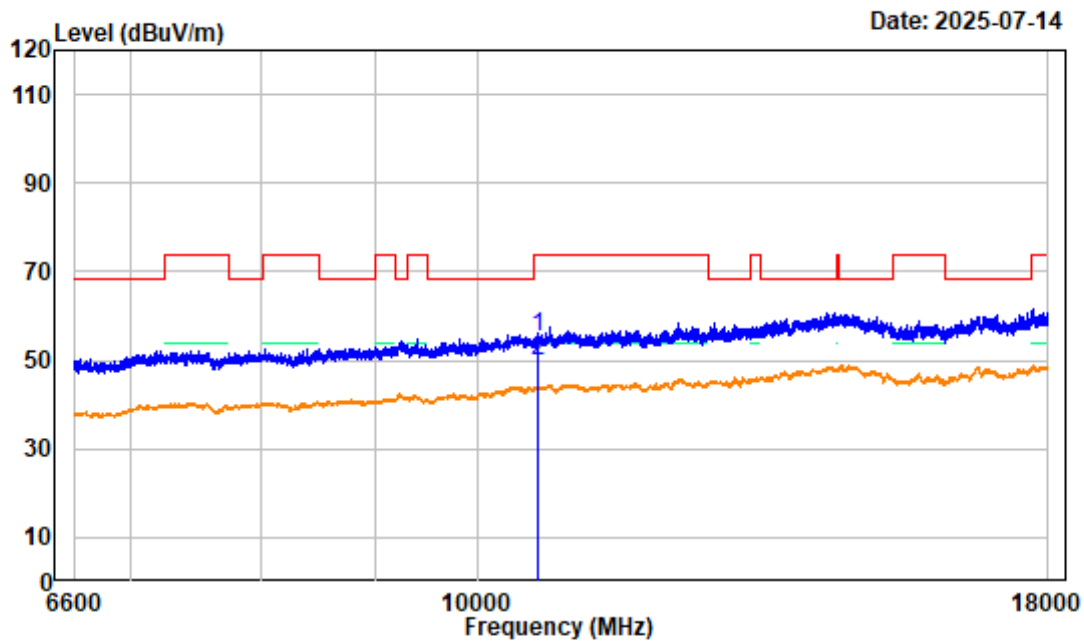

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10639.880	4.42	50.89	55.31	74.00	-18.69	Peak
2 10639.880	4.42	45.32	49.74	54.00	-4.26	Average


802.11A High Channel Bandedge_HORIZONTAL

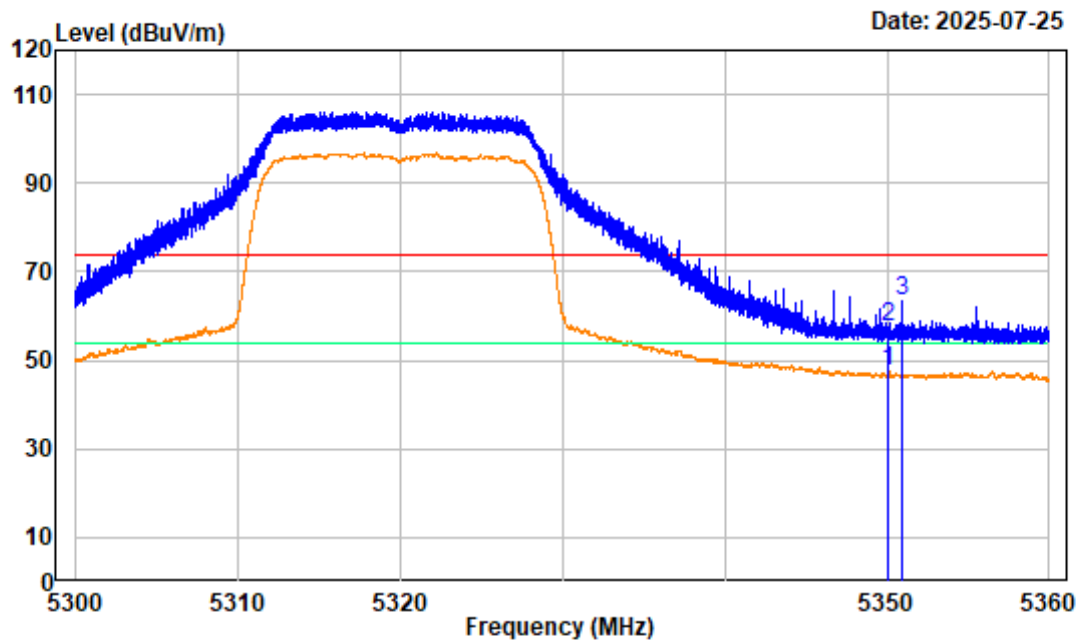

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5320MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.002	-5.81	53.56	47.75	54.00	-6.25 Average
2	5350.002	-5.81	63.44	57.63	74.00	-16.37 Peak
3	5350.947	-5.81	69.09	63.28	74.00	-10.72 Peak


802.11A High Channel Bandedge_VERTICAL

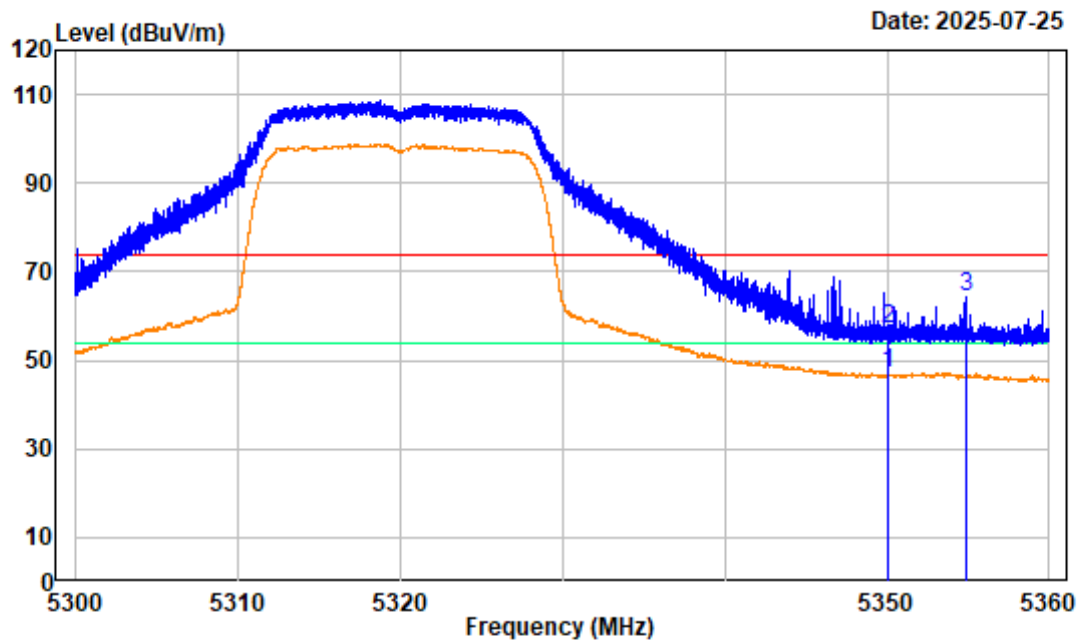

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5320MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.002	-5.81	52.87	47.06	54.00	-6.94 Average
2	5350.002	-5.81	62.85	57.04	74.00	-16.96 Peak
3	5354.825	-5.78	70.15	64.37	74.00	-9.63 Peak


802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

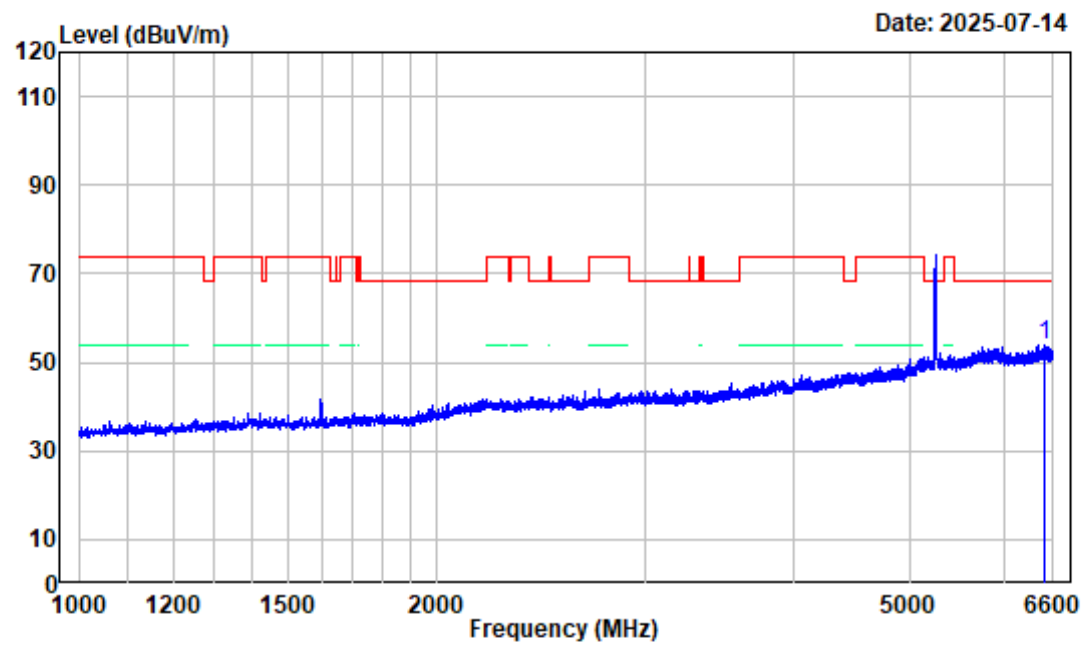

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6502.700	-3.81	57.65	53.84	68.20	-14.36 Peak


802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

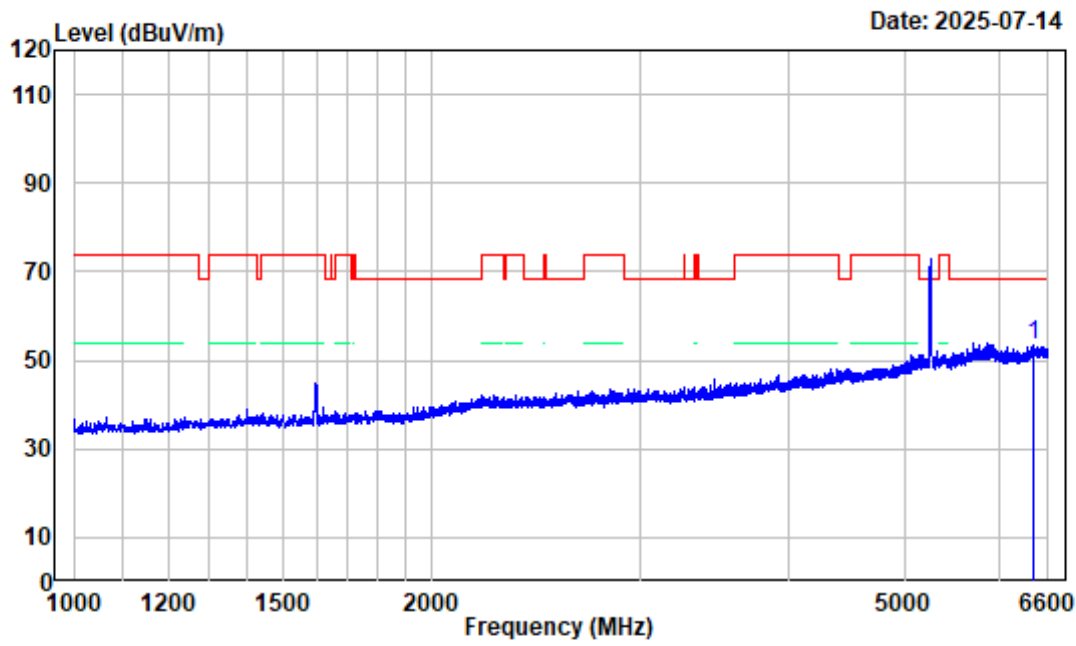

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6423.600	-3.64	57.07	53.43	68.20	-14.77 Peak


802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

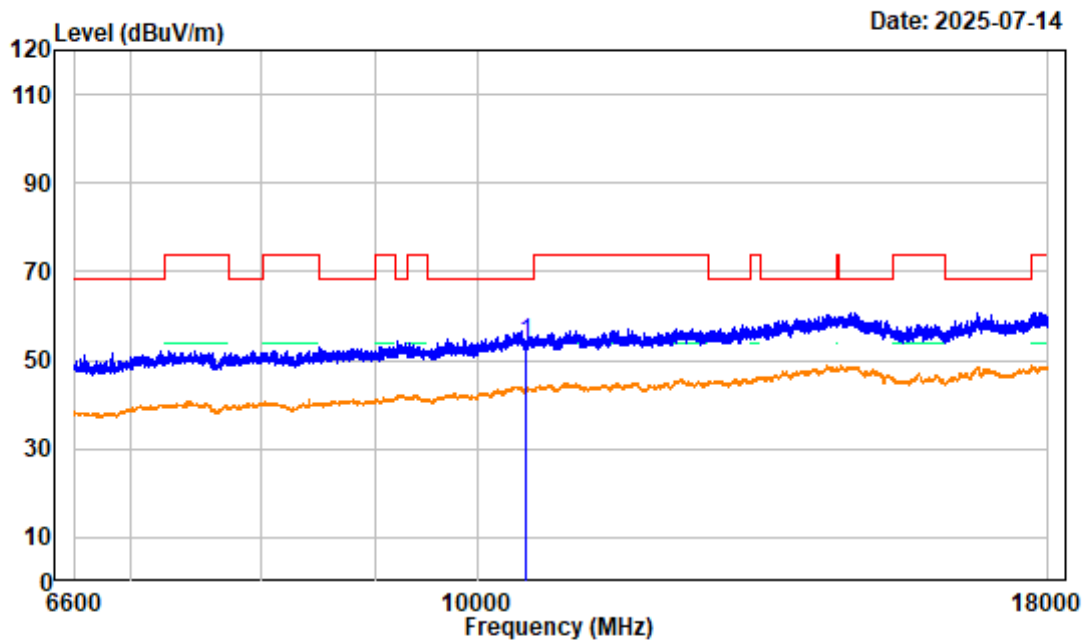

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.170	3.90	49.82	53.72	68.20	-14.48	Peak


802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

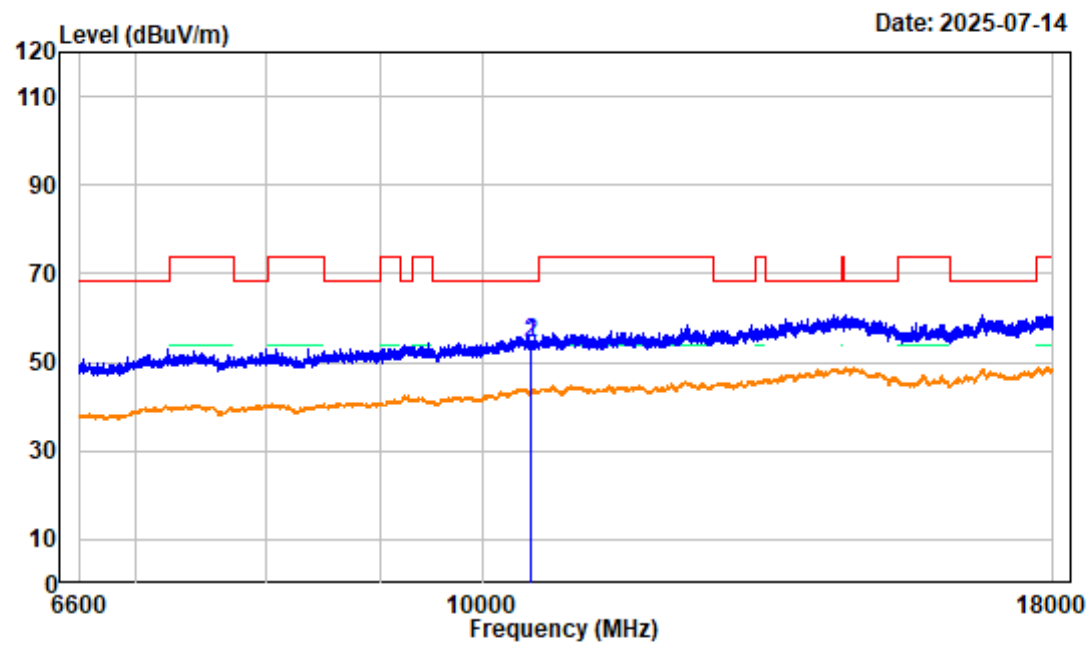

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.170	3.90	50.52	54.42	68.20	-13.78	Peak
2 10520.170	3.90	50.52	54.42	68.20	-13.78	Peak


802.11AC20 Low Channel Bandedge_HORIZONTAL

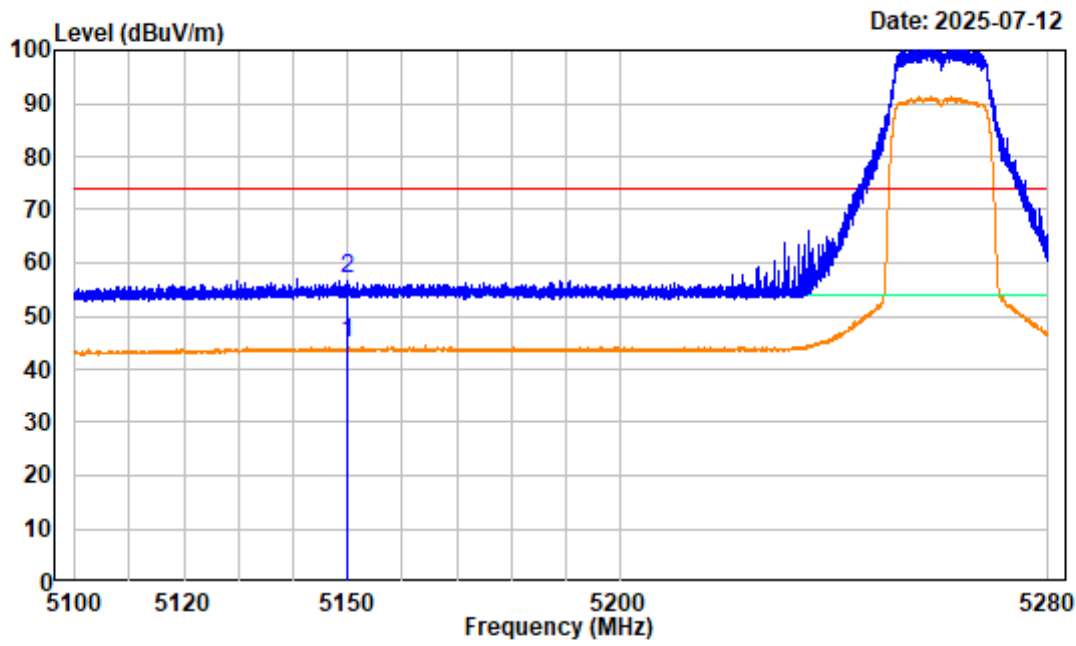

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.81	44.82	54.00	-9.18 average
2	5150.000	-5.99	62.79	56.80	74.00	-17.20 peak


802.11AC20 Low Channel Bandedge_VERTICAL

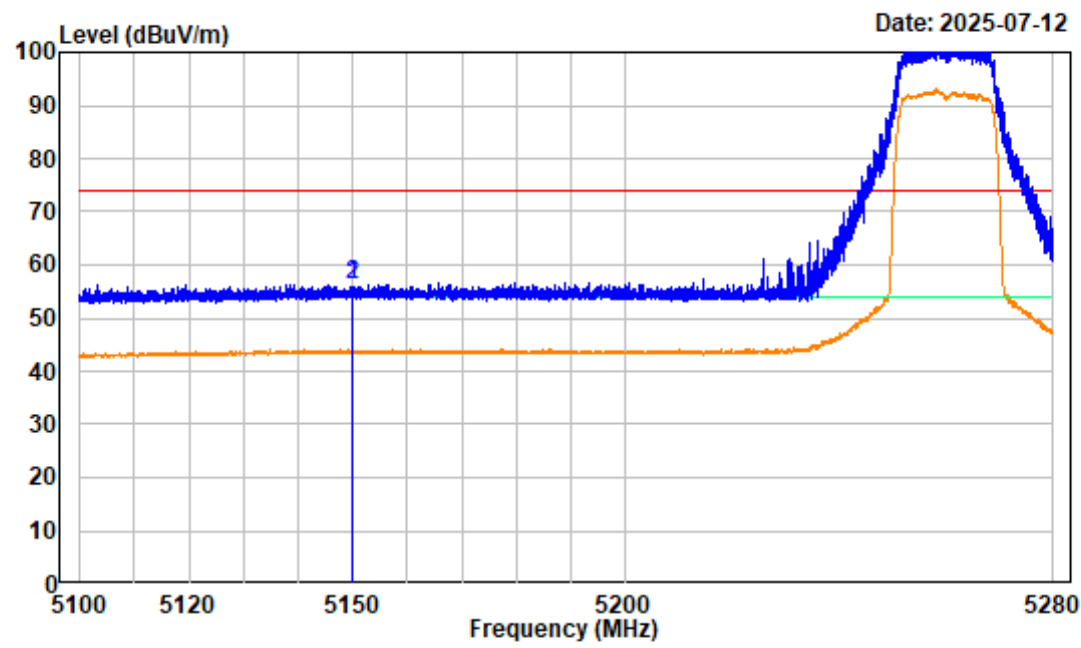

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	62.17	56.18	54.00	2.18 average
2	5150.000	-5.99	62.17	56.18	74.00	-17.82 peak


802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

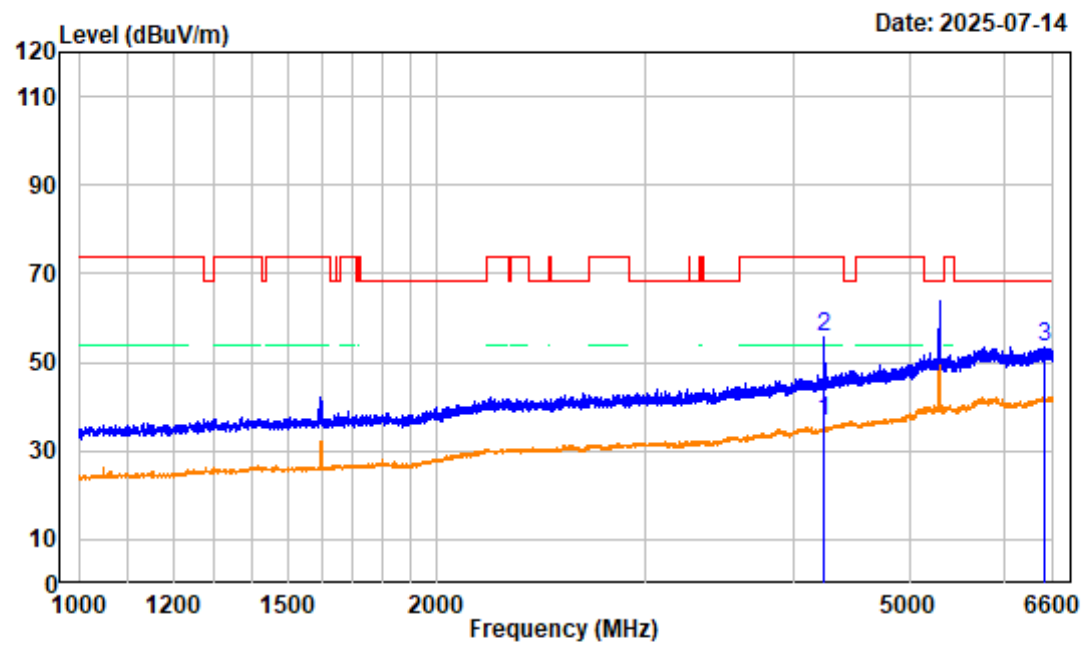

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4240.300	-7.87	44.33	36.46	54.00	-17.54	Average
2 4240.300	-7.87	63.62	55.75	74.00	-18.25	Peak
3 6485.200	-3.75	56.99	53.24	68.20	-14.96	Peak


802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

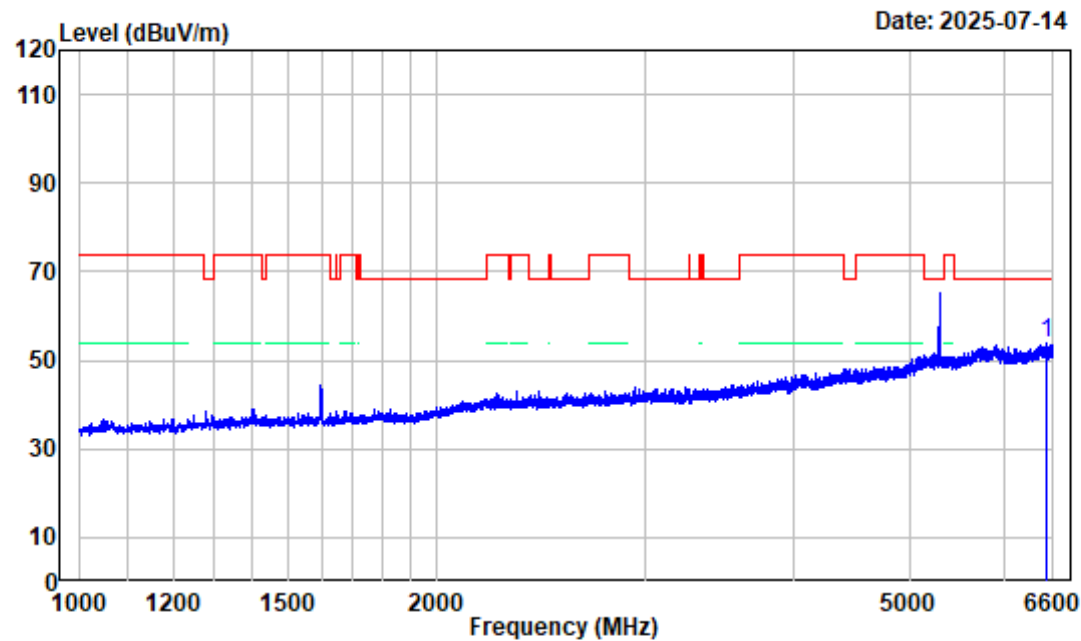

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6527.200	-3.77	57.46	53.69	68.20	-14.51	Peak


802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

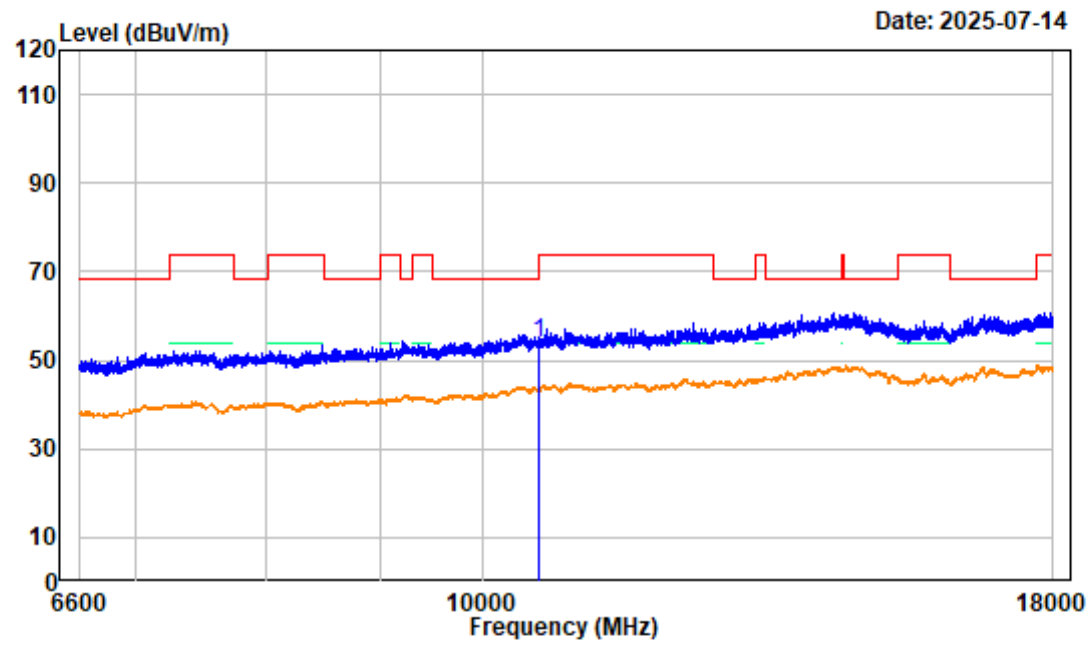

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10599.970	3.86	49.86	53.72	68.20	-14.48	Peak


802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

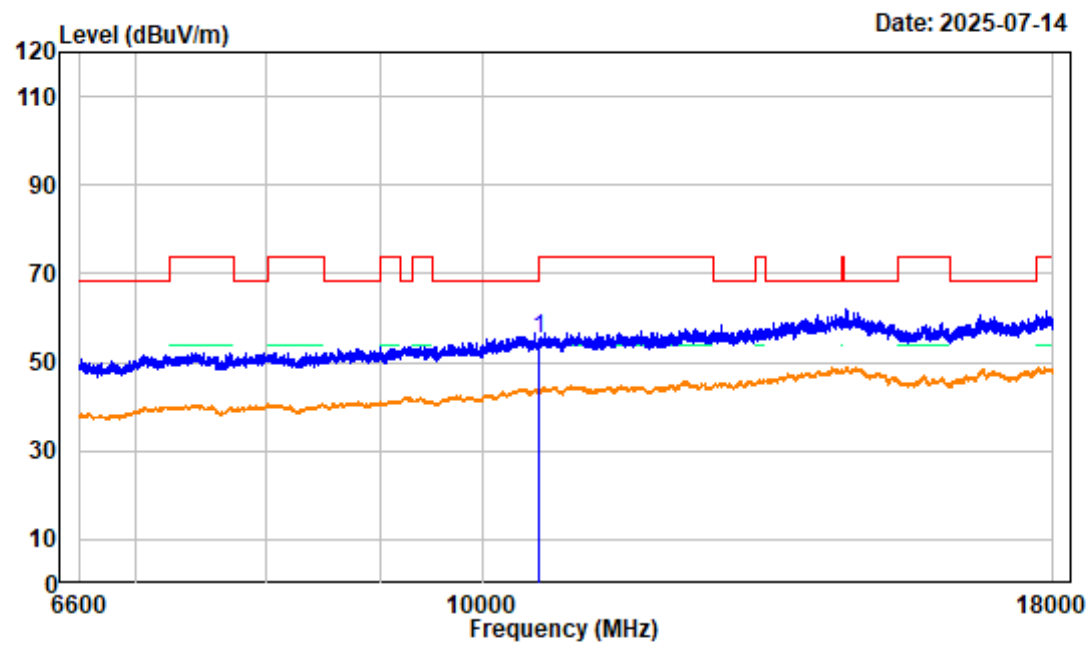

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10599.970	3.86	51.33	55.19	68.20	-13.01	Peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

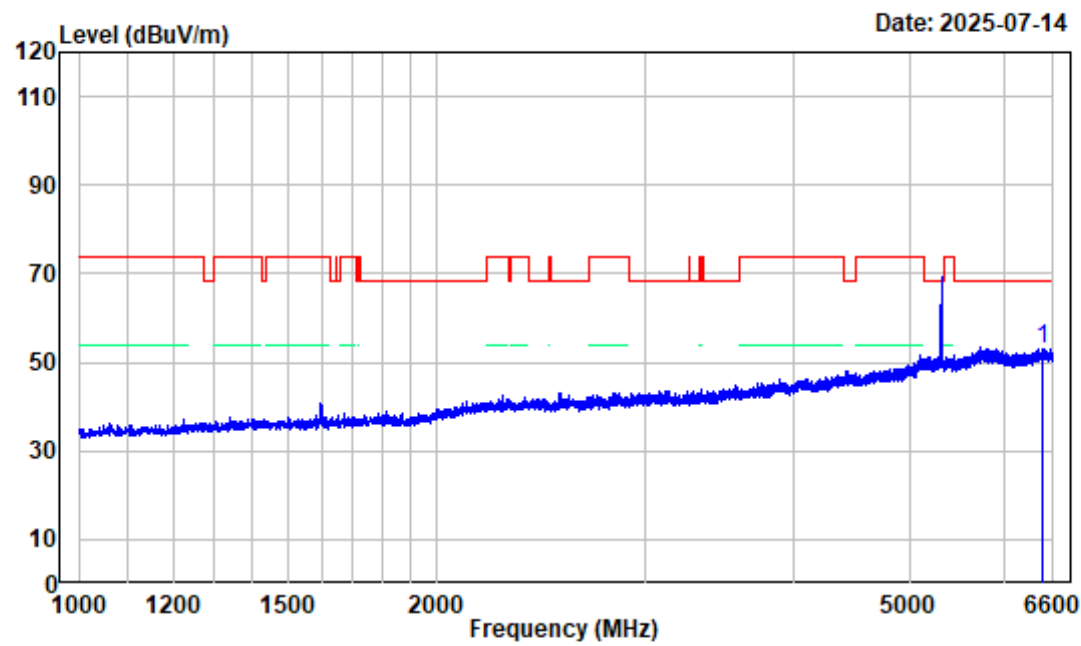

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6469.800	-3.70	56.83	53.13	68.20	-15.07 Peak


802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

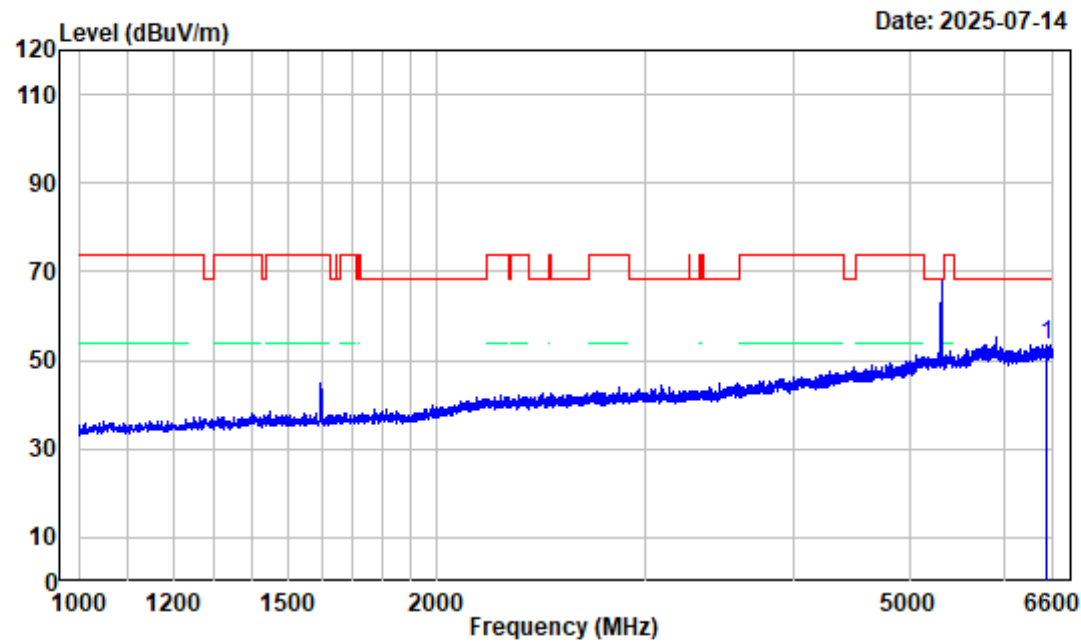

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6516.000	-3.79	57.23	53.44	68.20	-14.76	Peak

802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

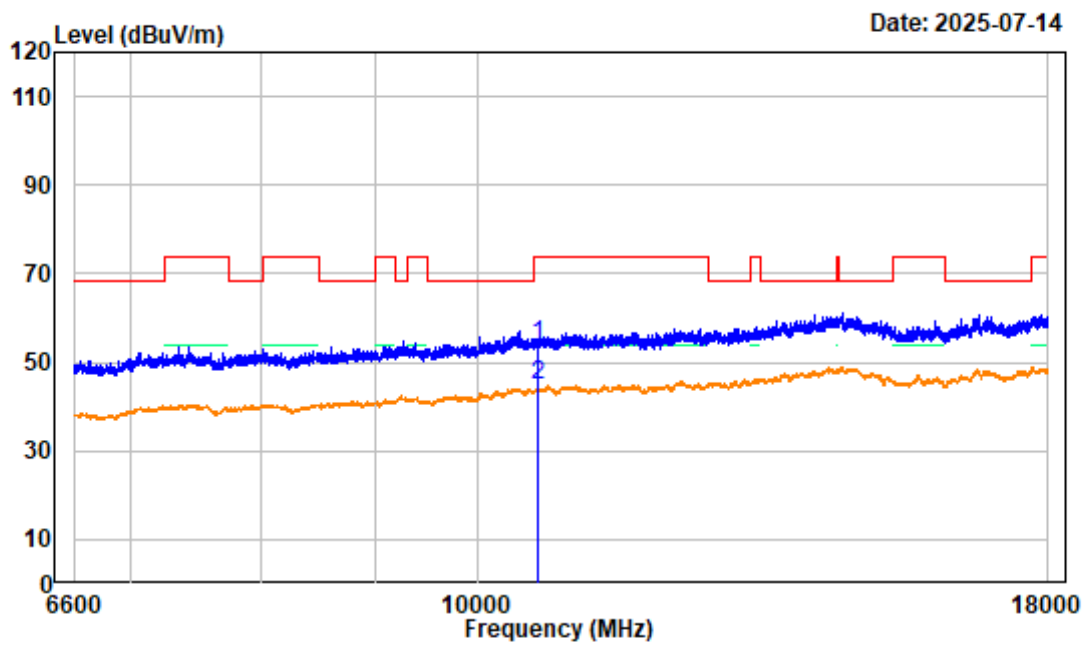

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC20 High Channel 5320MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10639.880	4.42	49.45	53.87	74.00	-20.13	Peak
2 10639.880	4.42	40.46	44.88	54.00	-9.12	Average


802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

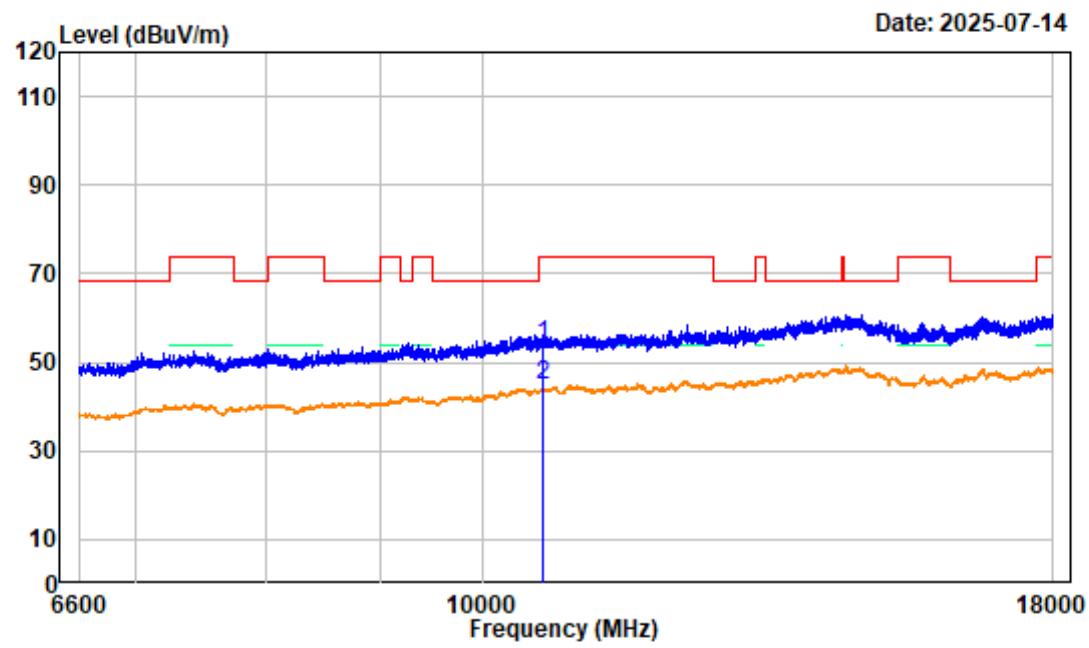

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10639.880	4.42	49.32	53.74	74.00	-20.26	Peak
2 10639.880	4.42	40.42	44.84	54.00	-9.16	Average


802.11AC20 High Channel Bandedge_HORIZONTAL

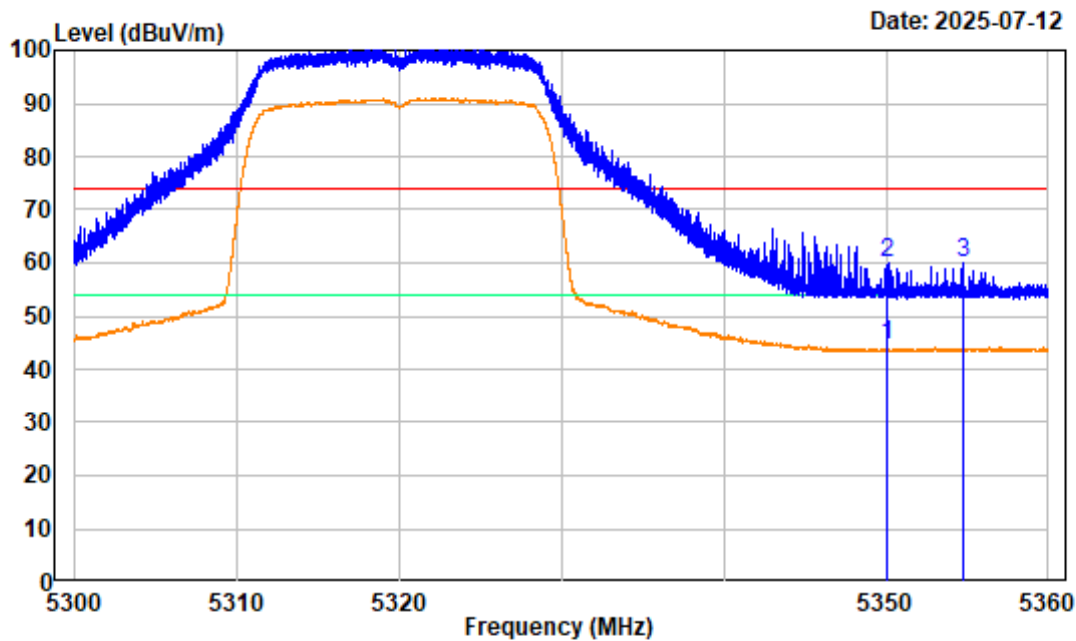

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5320MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.44	44.63	54.00	-9.37 average
2	5350.000	-5.81	65.92	60.11	74.00	-13.89 peak
3	5354.765	-5.78	65.71	59.93	74.00	-14.07 Peak


802.11AC20 High Channel Bandedge_VERTICAL

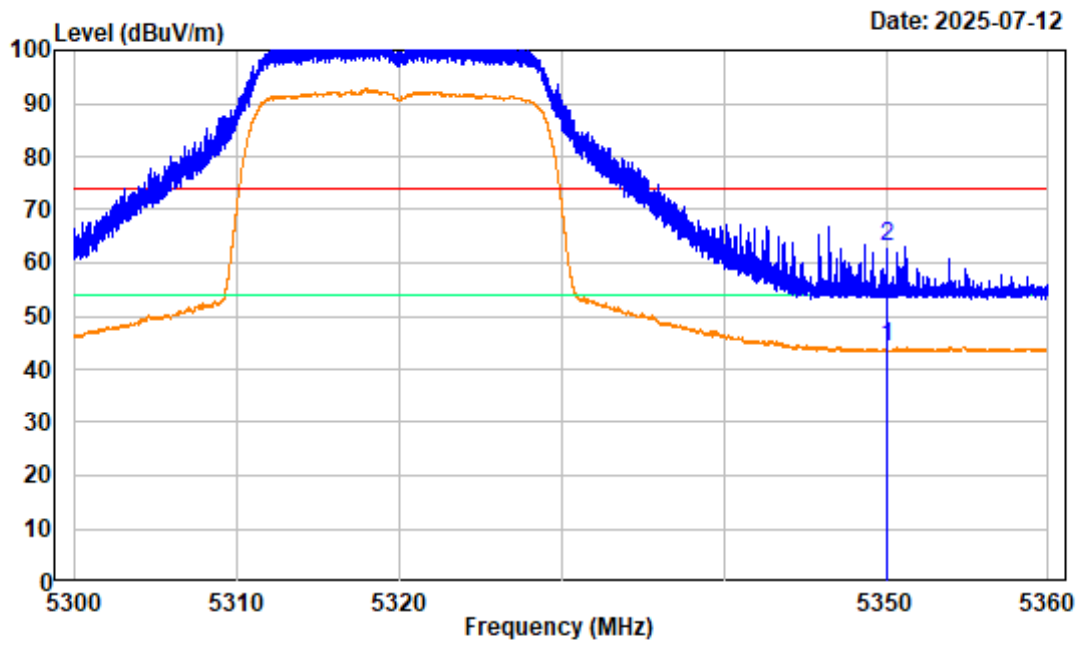

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5320MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	49.93	44.12	54.00	-9.88 average
2	5350.000	-5.81	68.91	63.10	74.00	-10.90 peak


802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

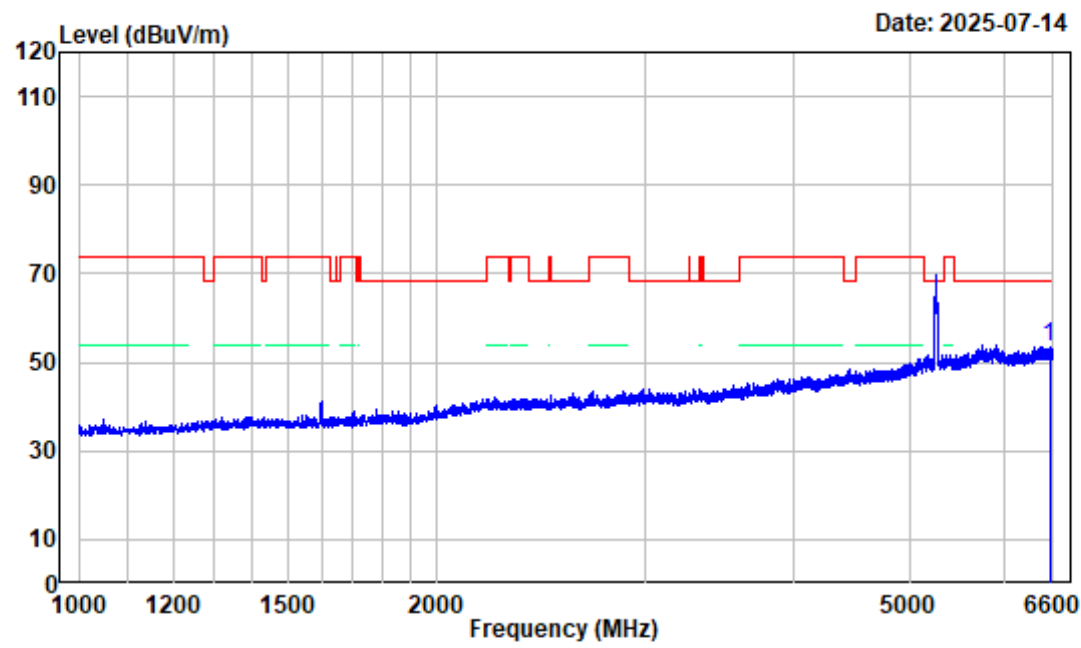

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5270MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6554.500	-3.70	57.30	53.60	68.20	-14.60 Peak


802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

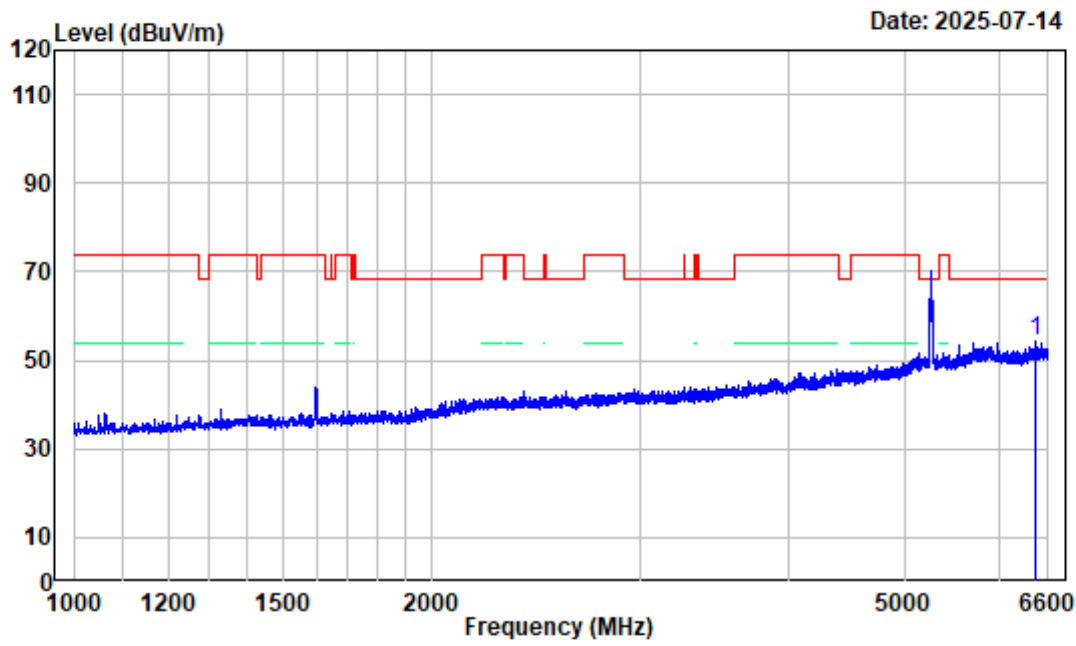

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5270MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6436.900	-3.63	57.78	54.15	68.20	-14.05 Peak


802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

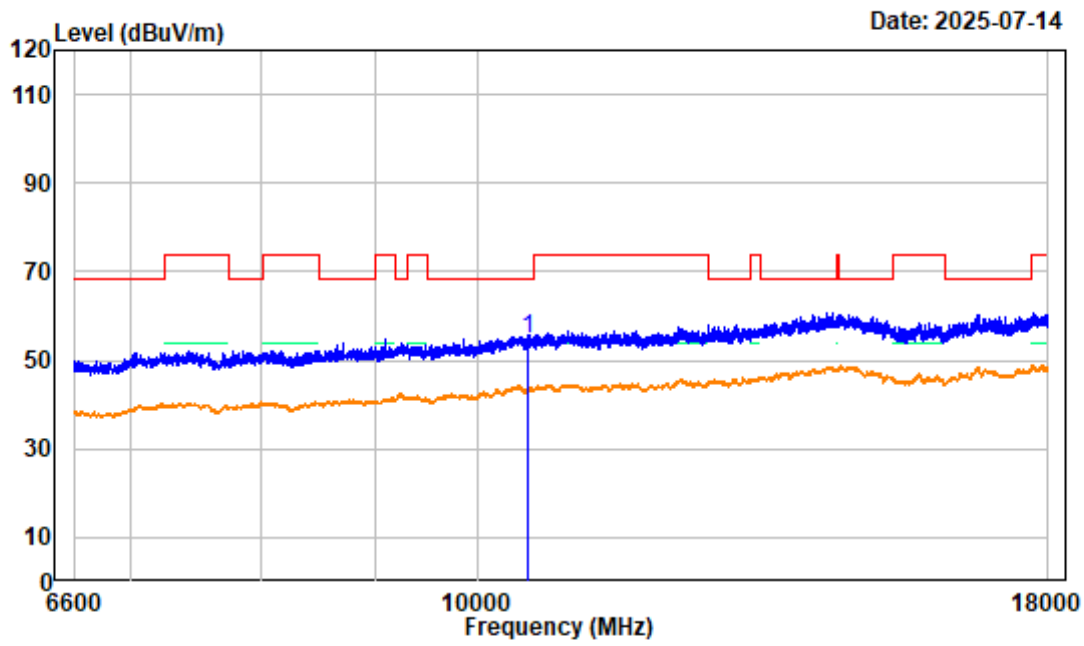

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5270MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10540.130	4.11	50.55	54.66	68.20	-13.54	Peak


802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

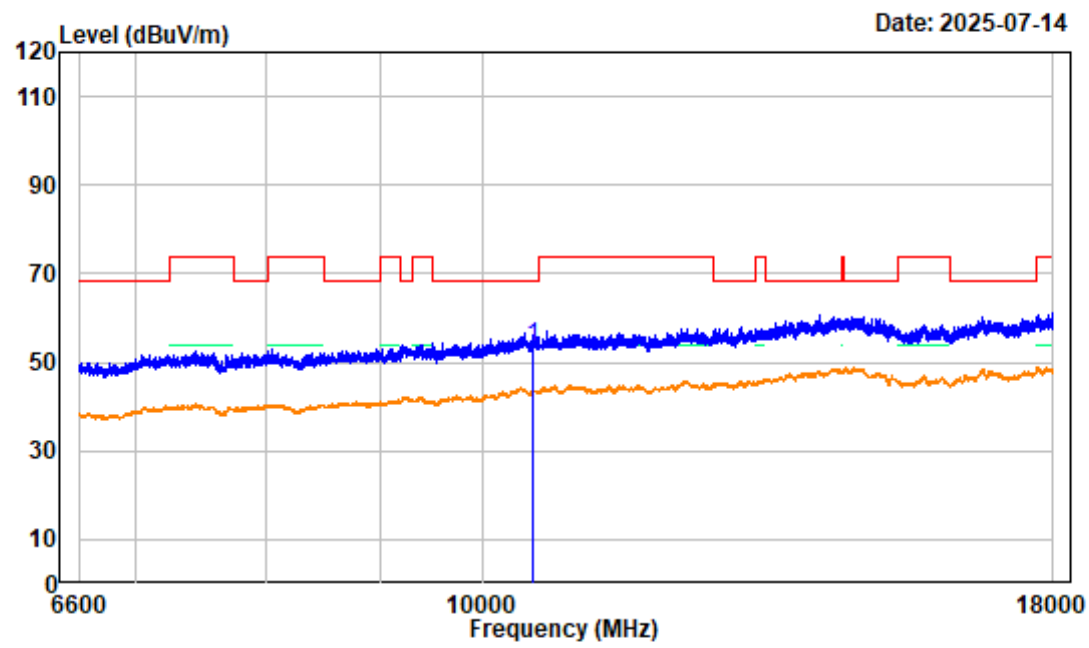

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5270MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10540.130	4.11	49.41	53.52	68.20	-14.68	Peak


802.11AC40 Low Channel Bandedge_HORIZONTAL

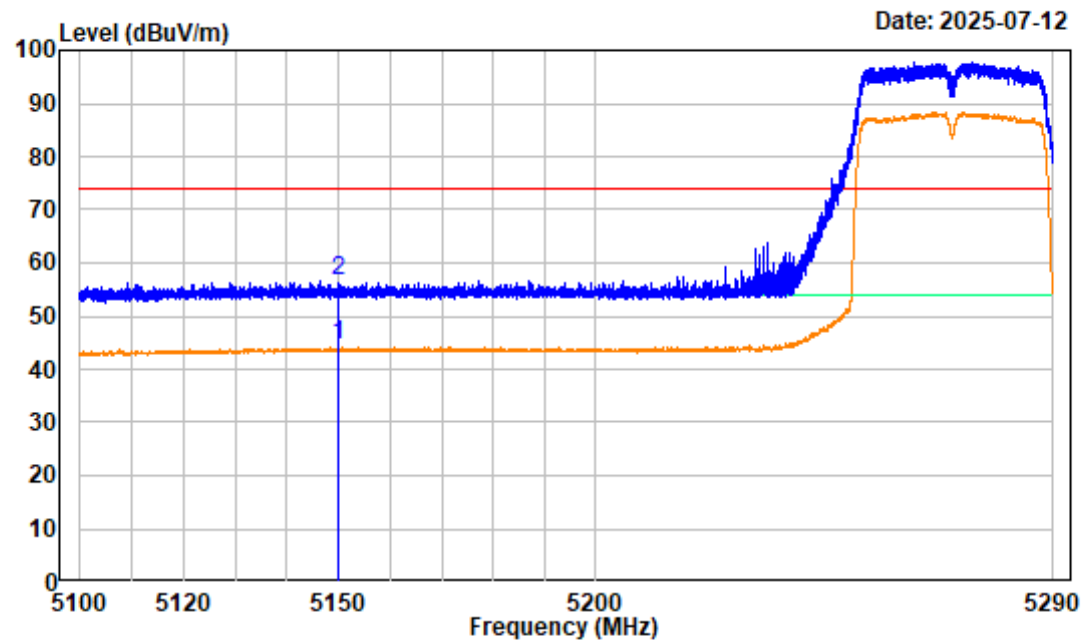

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5270MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.48	44.49	54.00	-9.51 average
2	5150.000	-5.99	62.47	56.48	74.00	-17.52 peak


802.11AC40 Low Channel Bandedge_VERTICAL

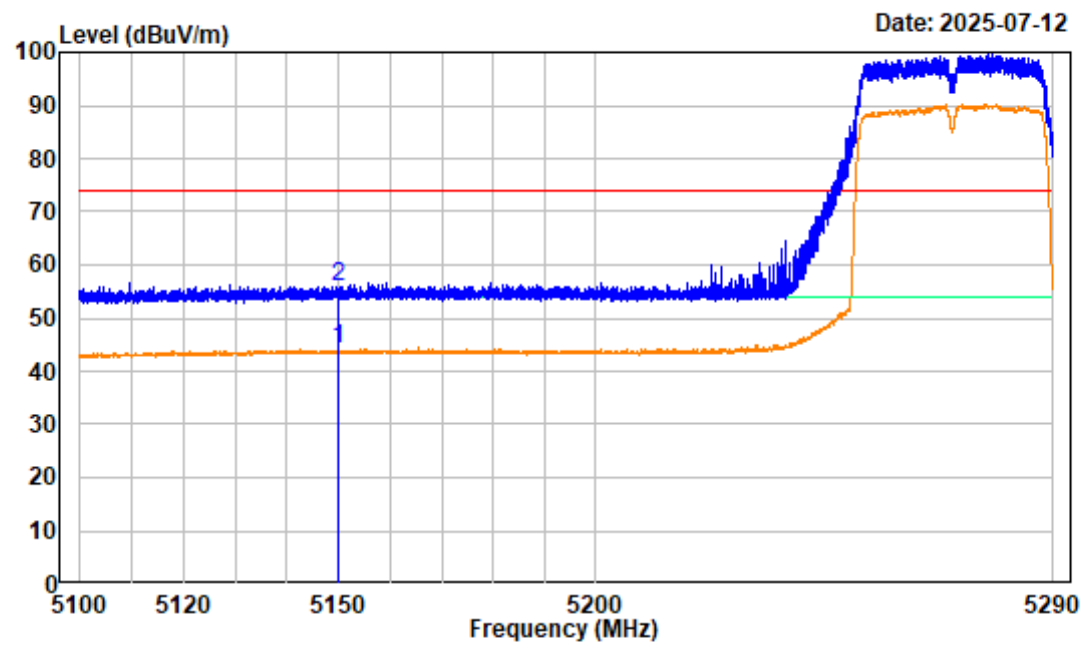

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5270MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.00	44.01	54.00	-9.99 average
2	5150.000	-5.99	61.98	55.99	74.00	-18.01 peak


802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

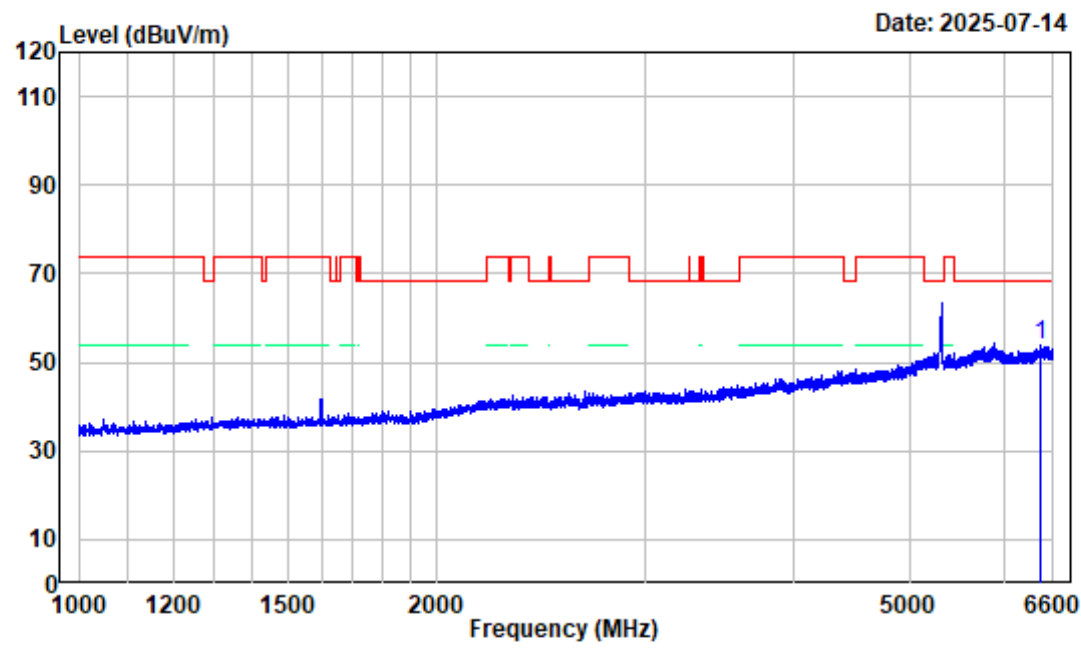

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5310MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6443.900	-3.62	57.40	53.78	68.20	-14.42 Peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

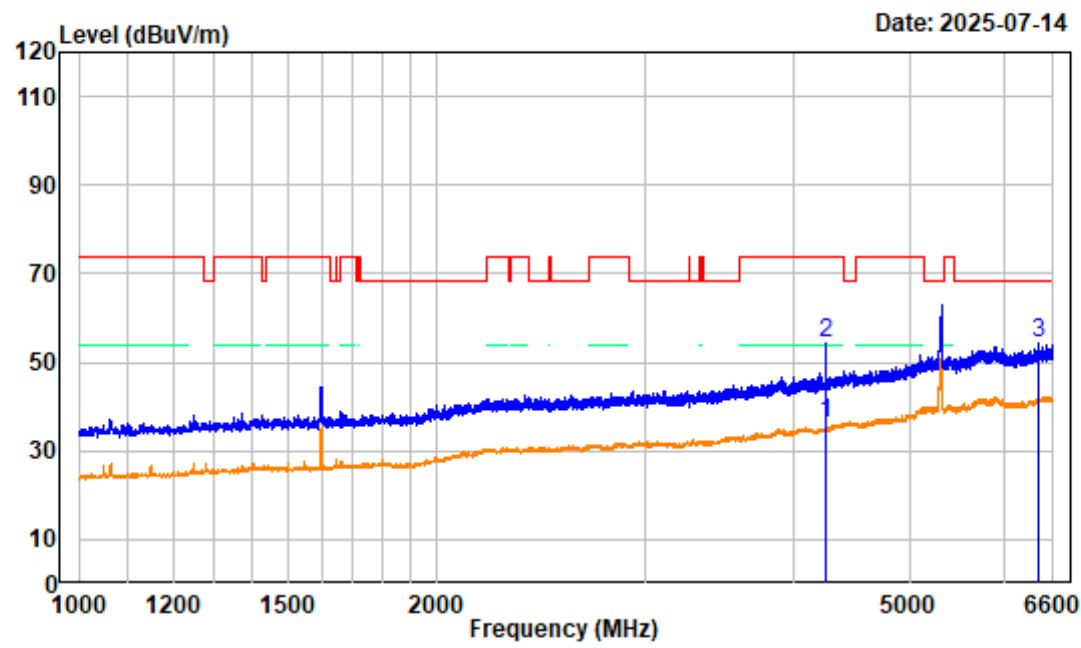

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5310MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4248.000	-7.89	43.91	36.02	54.00	-17.98 Average
2	4248.000	-7.89	62.26	54.37	74.00	-19.63 Peak
3	6418.000	-3.64	58.20	54.56	68.20	-13.64 Peak


802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

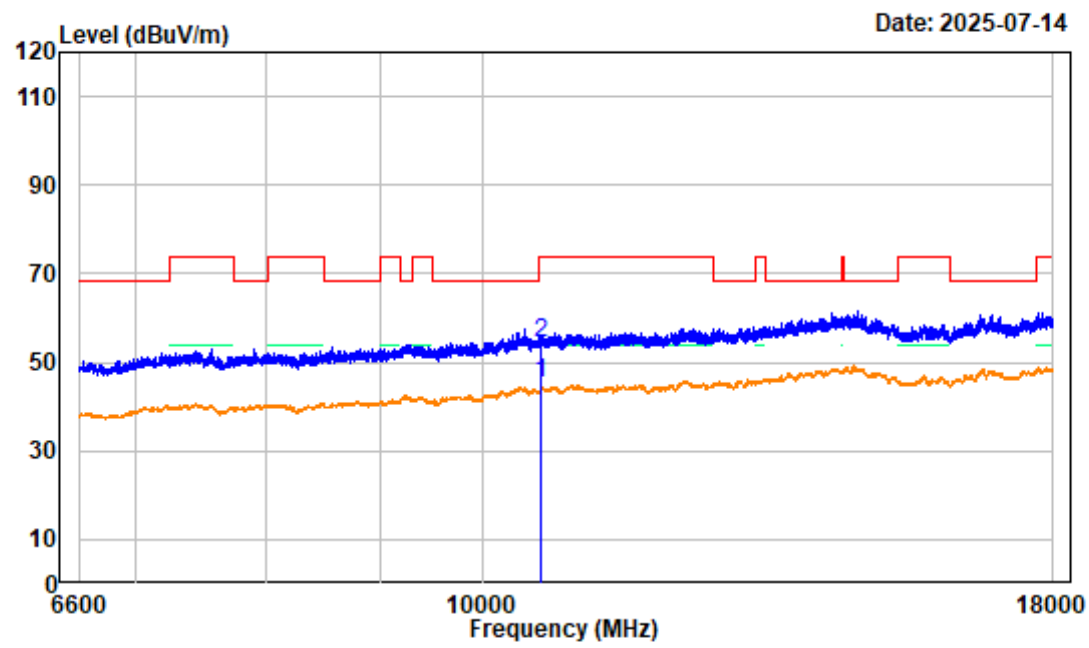

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5310MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10619.920	4.14	41.05	45.19	54.00	-8.81	Average
2 10619.920	4.14	50.03	54.17	74.00	-19.83	Peak


802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

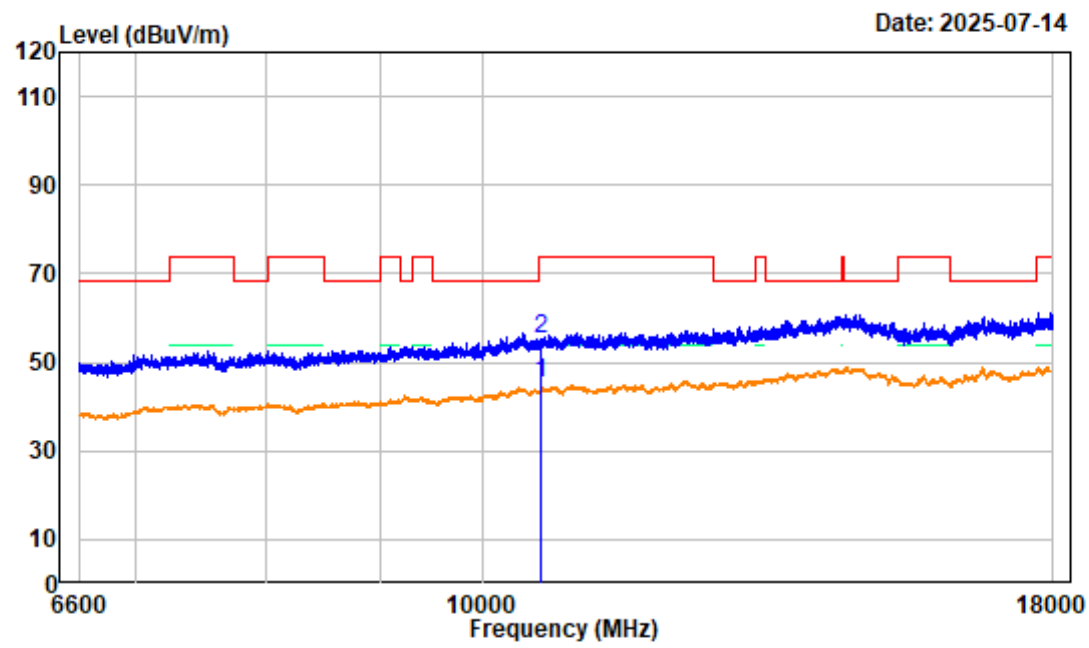

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5310MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10619.920	4.14	40.98	45.12	54.00	-8.88	Average
2 10619.920	4.14	50.94	55.08	74.00	-18.92	Peak


802.11AC40 High Channel Bandedge_HORIZONTAL

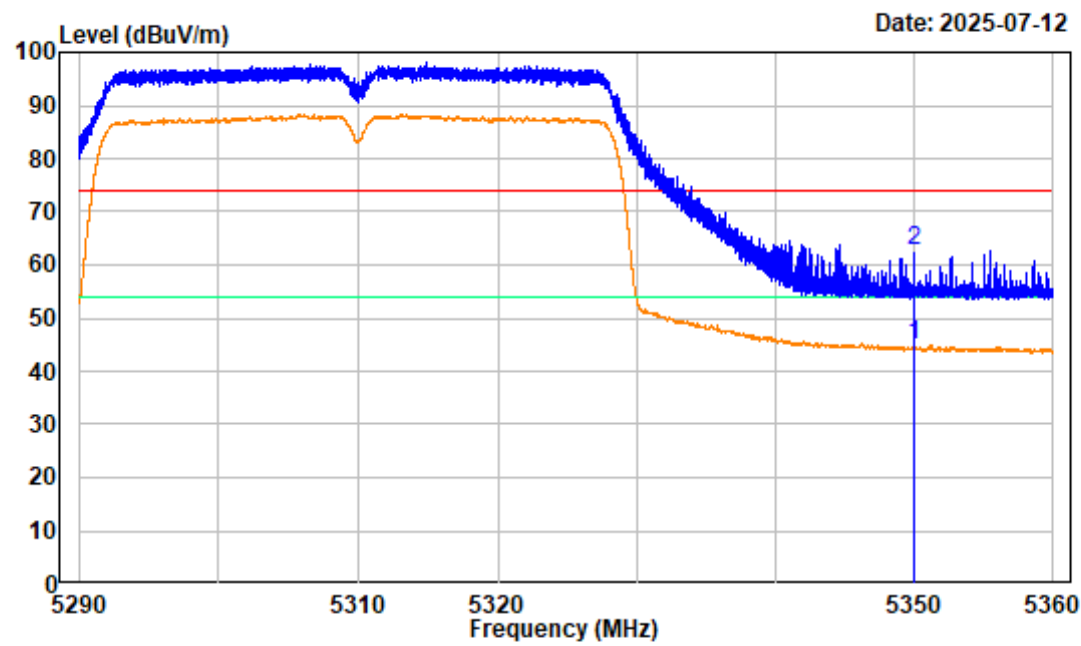

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5310MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.56	44.75	54.00	-9.25 average
2	5350.000	-5.81	68.53	62.72	74.00	-11.28 peak


802.11AC40 High Channel Bandedge_VERTICAL

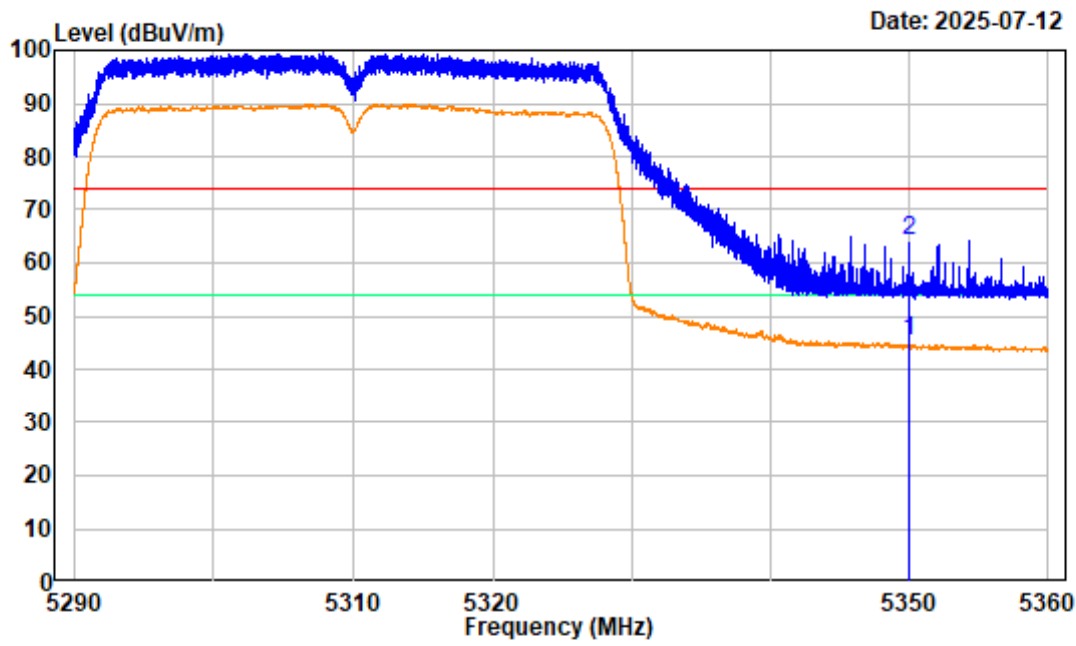

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5310MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	51.14	45.33	54.00	-8.67 Average
2	5350.000	-5.81	70.12	64.31	74.00	-9.69 peak


802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

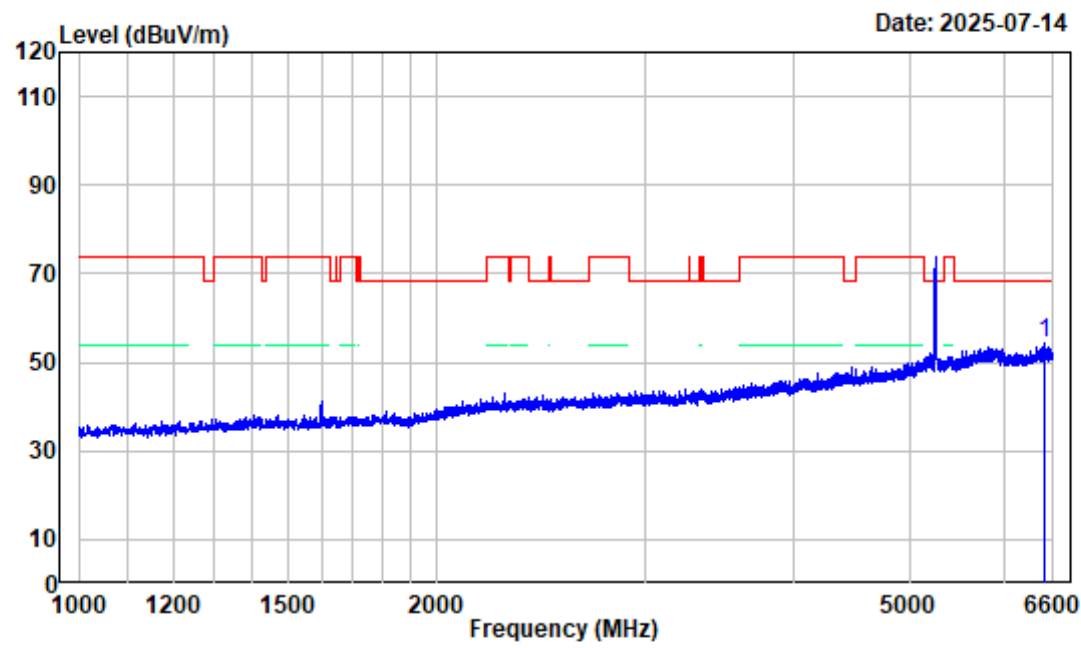

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6502.700	-3.81	58.16	54.35	68.20	-13.85	Peak


802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

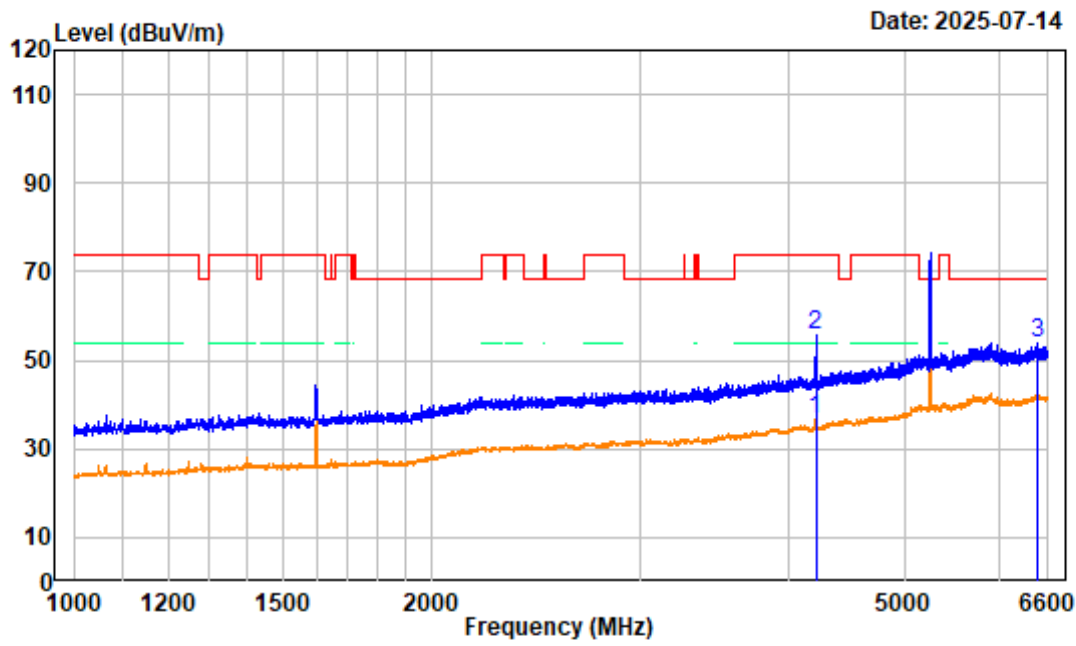

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4208.800	-7.79	44.27	36.48	54.00	-17.52 Average
2	4208.800	-7.79	63.40	55.61	74.00	-18.39 Peak
3	6472.600	-3.71	57.53	53.82	68.20	-14.38 Peak


802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

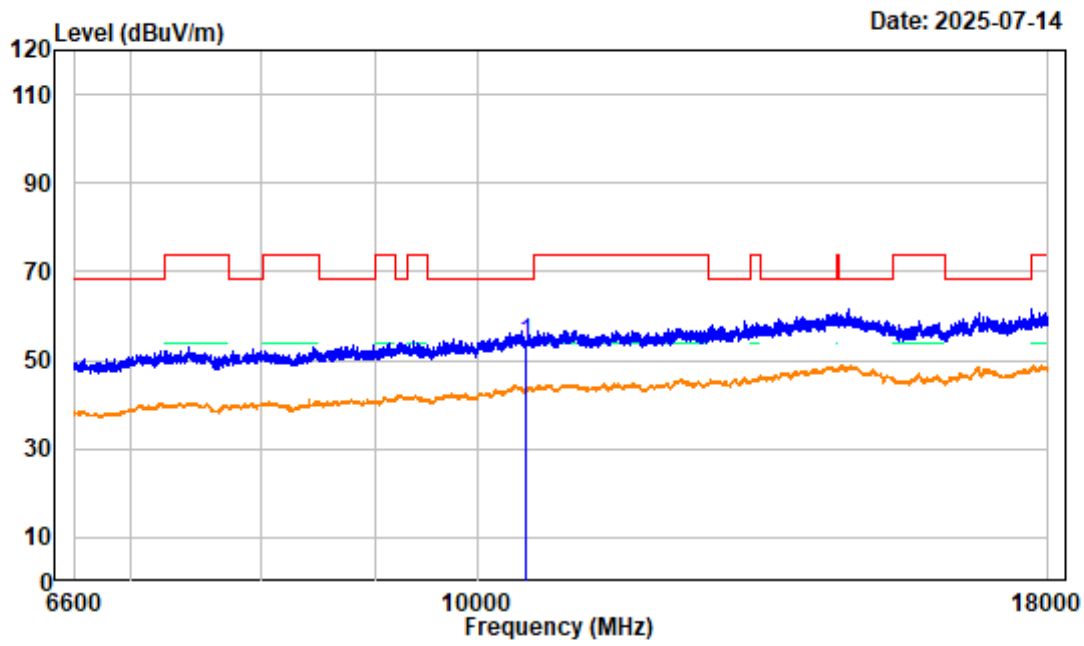

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.170	3.90	49.98	53.88	68.20	-14.32	Peak


802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

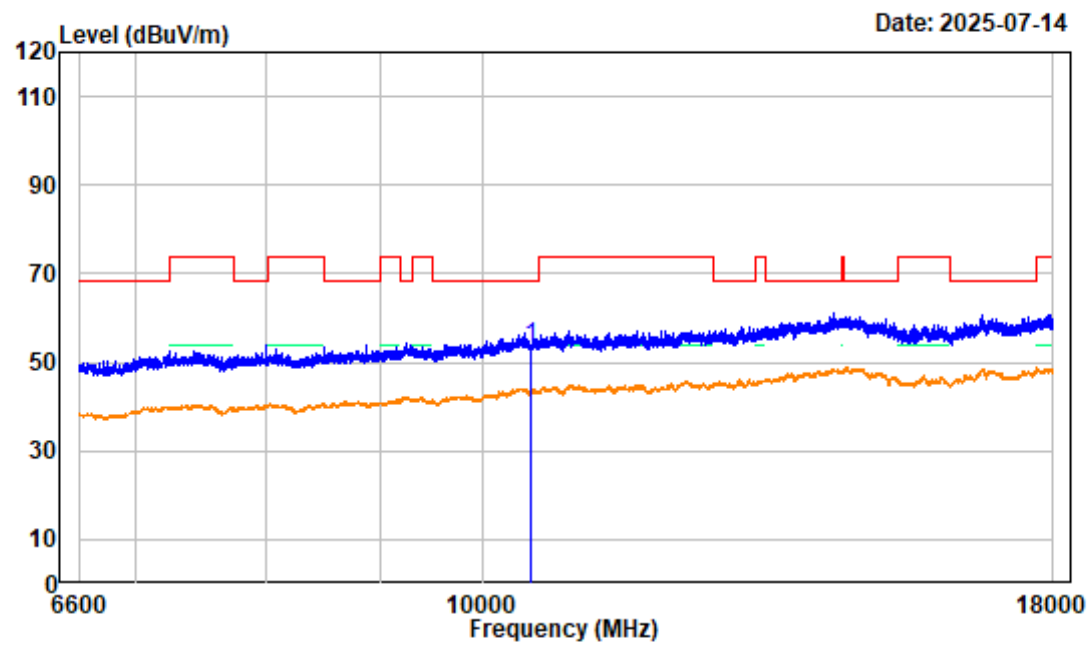

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5260MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10520.170	3.90	49.63	53.53	68.20	-14.67	Peak


802.11AX20 Low Channel Bandedge_HORIZONTAL

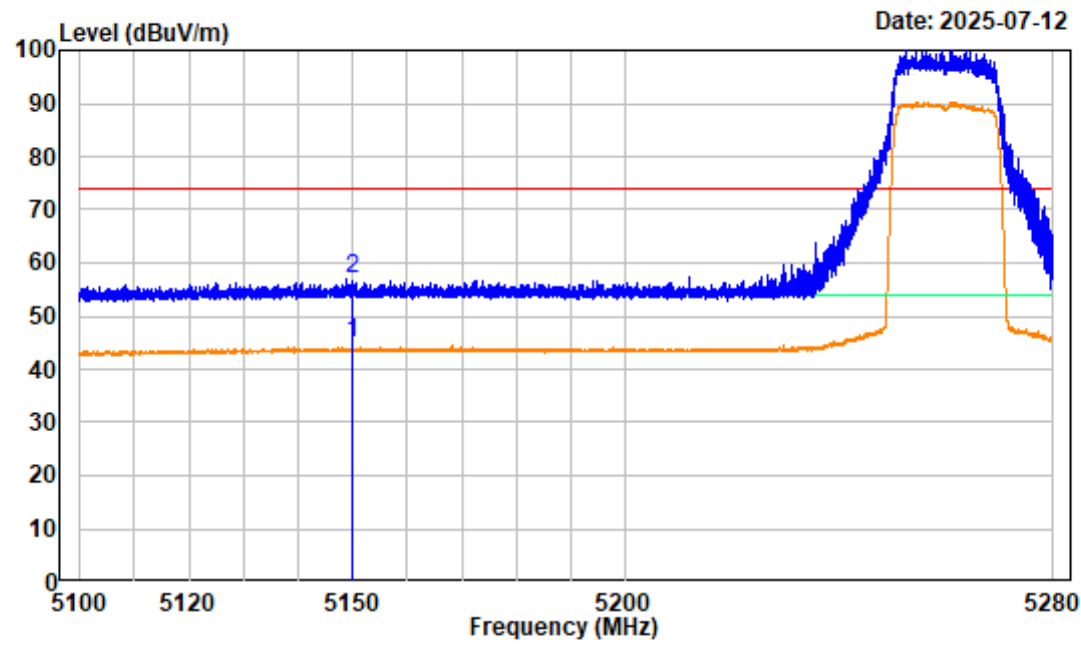

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.88	44.89	54.00	-9.11 average
2	5150.000	-5.99	62.87	56.88	74.00	-17.12 peak


802.11AX20 Low Channel Bandedge_VERTICAL

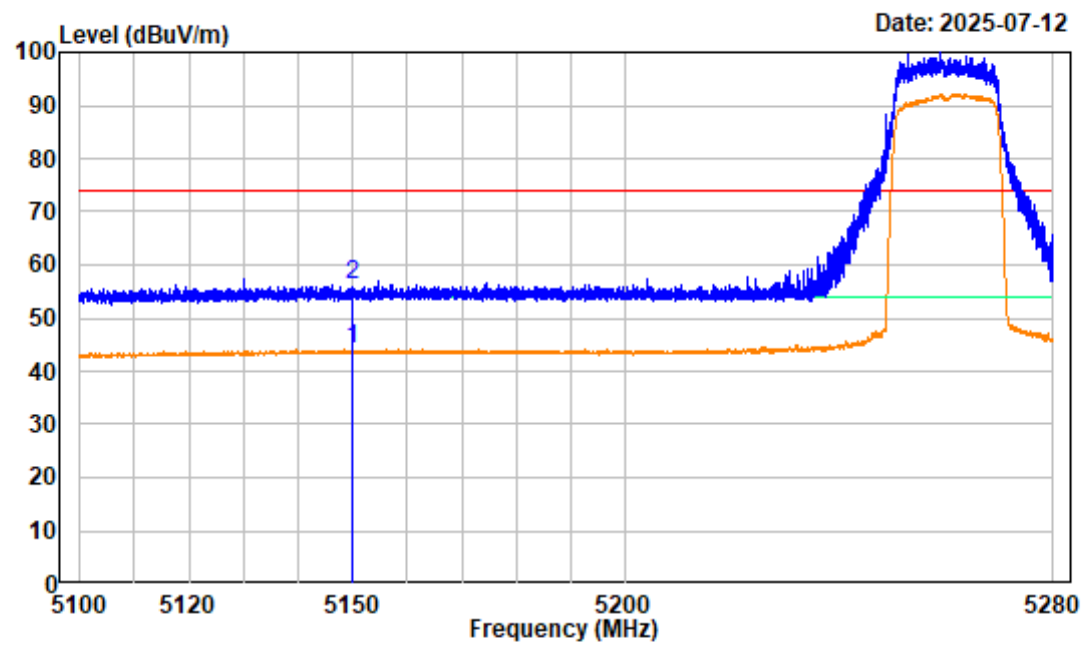

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.05	44.06	54.00	-9.94 Average
2	5150.000	-5.99	62.06	56.07	74.00	-17.93 peak


802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

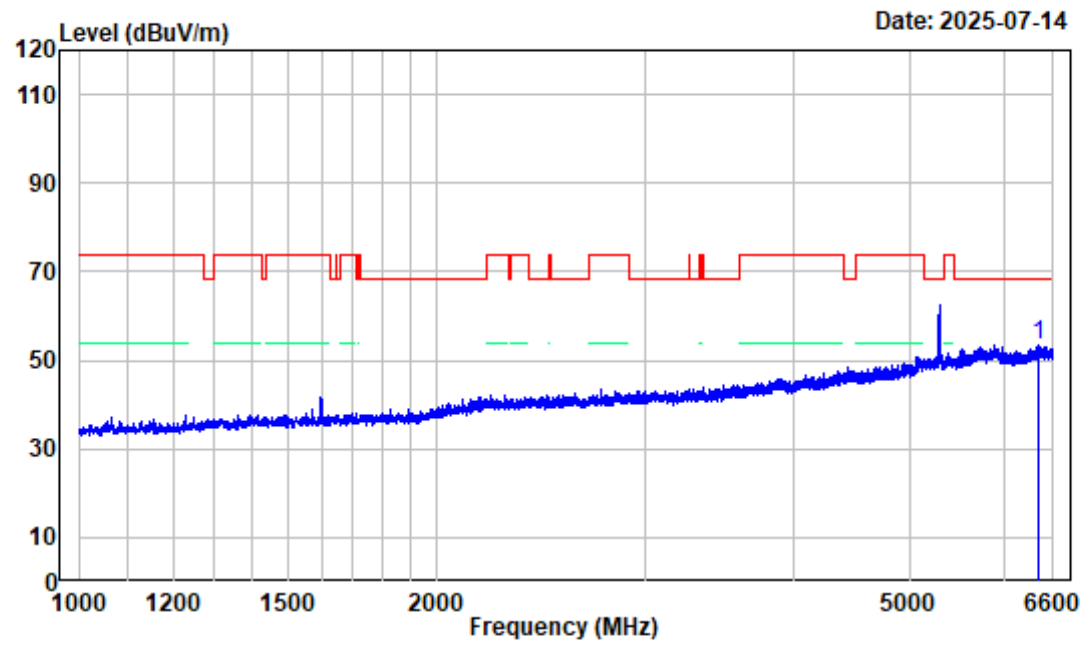

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6415.900	-3.65	56.95	53.30	68.20	-14.90	Peak


802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

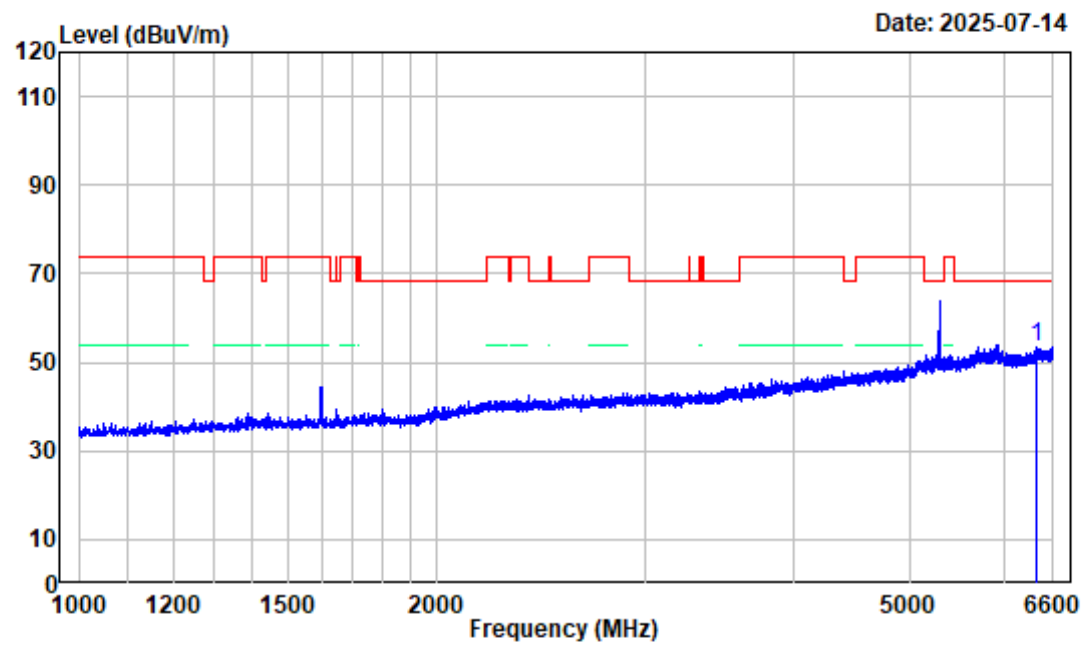

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5300MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6394.900	-3.75	57.20	53.45	68.20	-14.75	Peak


802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

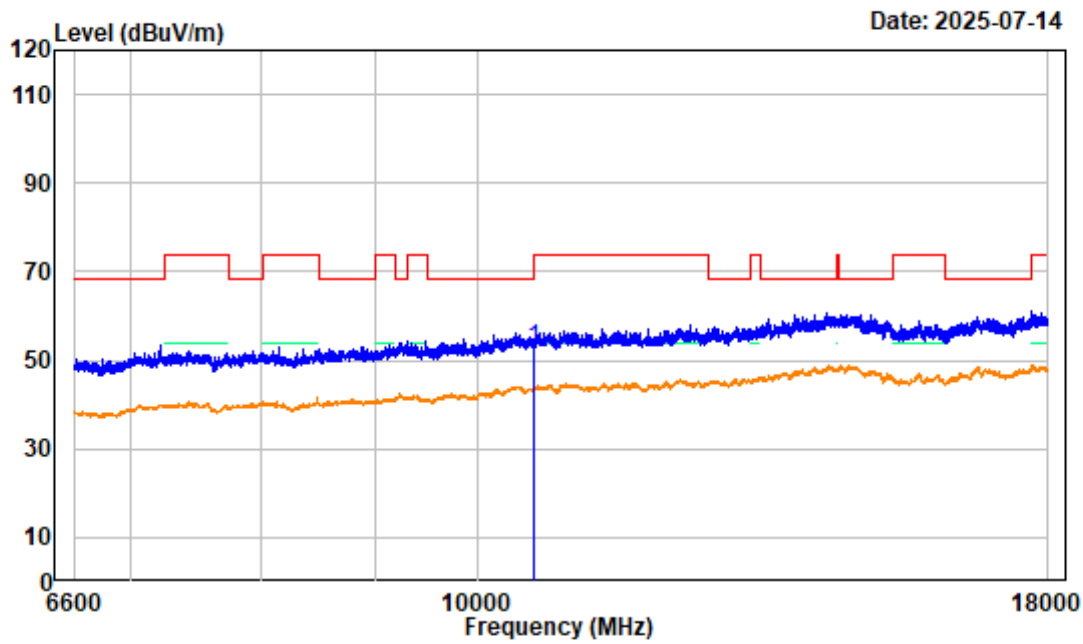

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10599.970	3.86	48.87	52.73	68.20	-15.47	Peak


802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

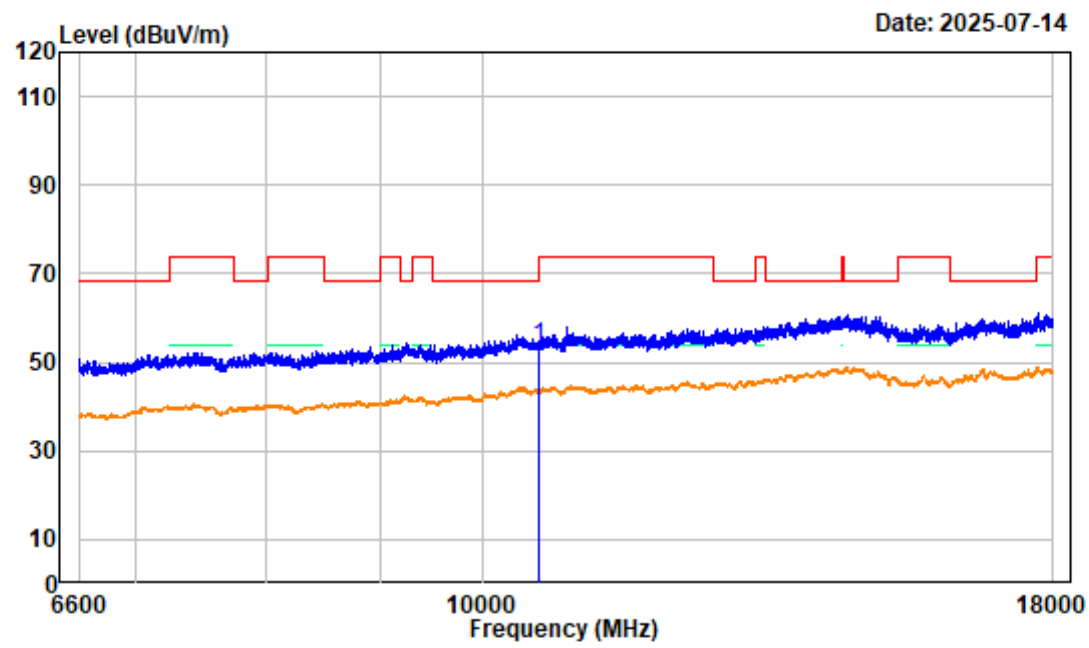

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5300MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10599.970	3.86	49.48	53.34	68.20	-14.86	Peak


802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

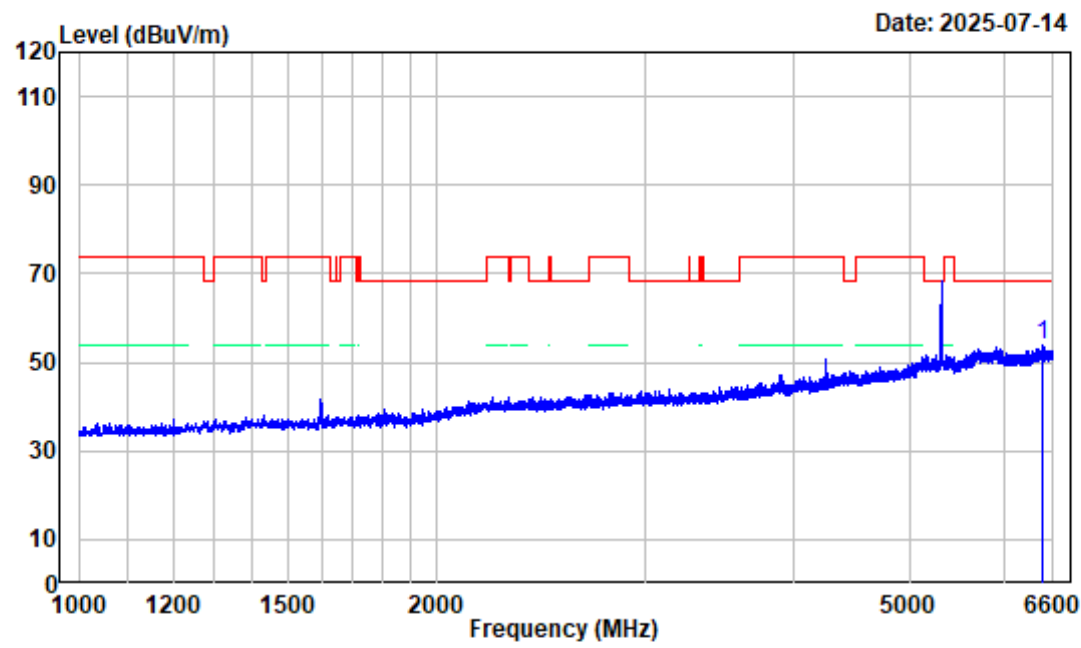

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6457.200	-3.64	57.37	53.73	68.20	-14.47	Peak


802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

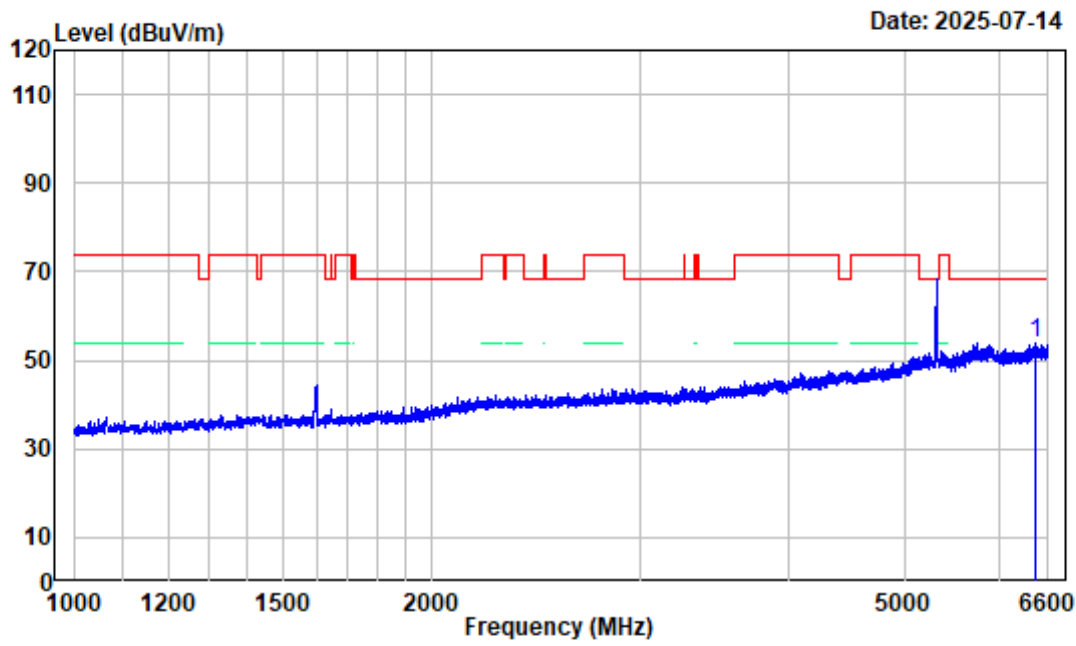

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6442.500	-3.62	57.57	53.95	68.20	-14.25 Peak


802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

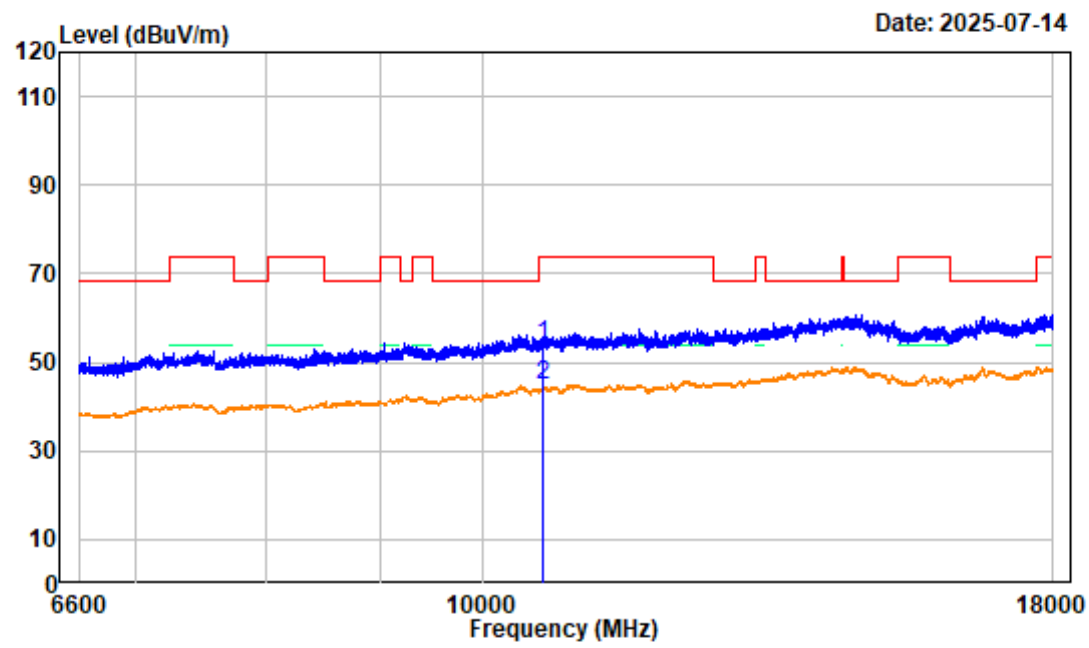

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10639.880	4.42	49.59	54.01	74.00	-19.99	Peak
2 10639.880	4.42	40.60	45.02	54.00	-8.98	Average


802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

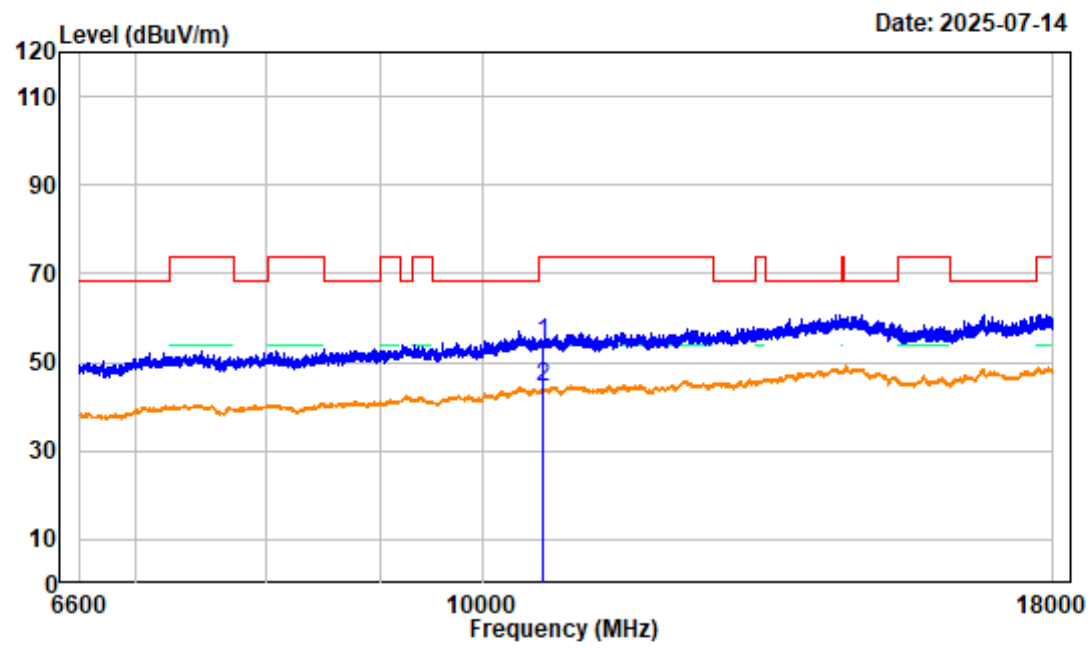

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5320MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10639.880	4.42	50.05	54.47	74.00	-19.53	Peak
2 10639.880	4.42	40.10	44.52	54.00	-9.48	Average


802.11AX20 High Channel Bandedge_HORIZONTAL

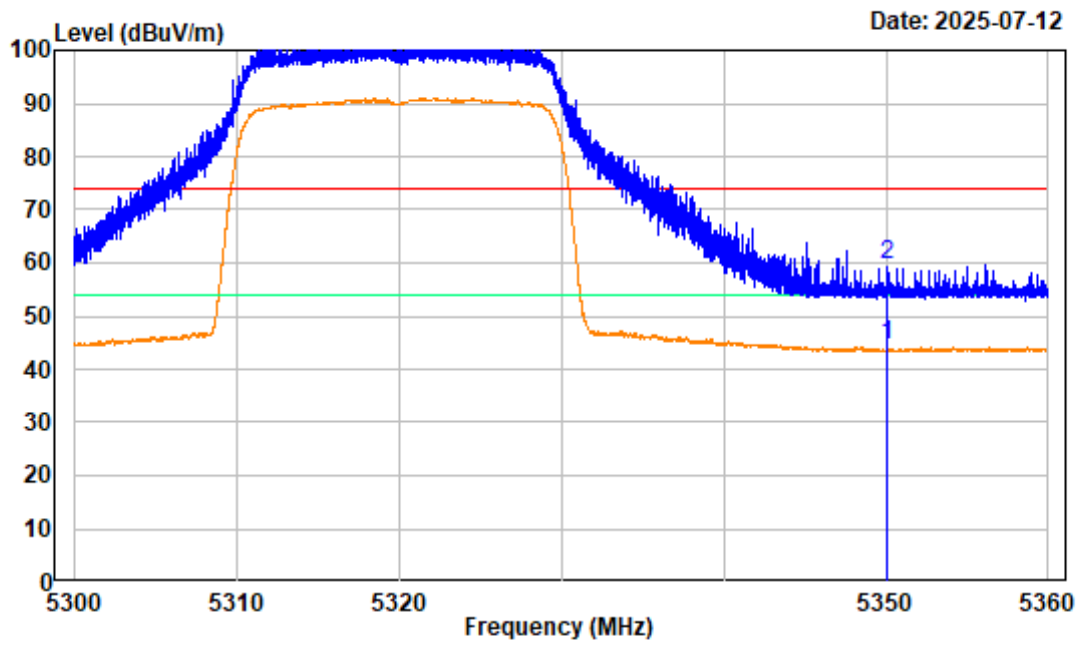

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5320MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.29	44.48	54.00	-9.52 Average
2	5350.000	-5.81	65.26	59.45	74.00	-14.55 peak


802.11AX20 High Channel Bandedge_VERTICAL

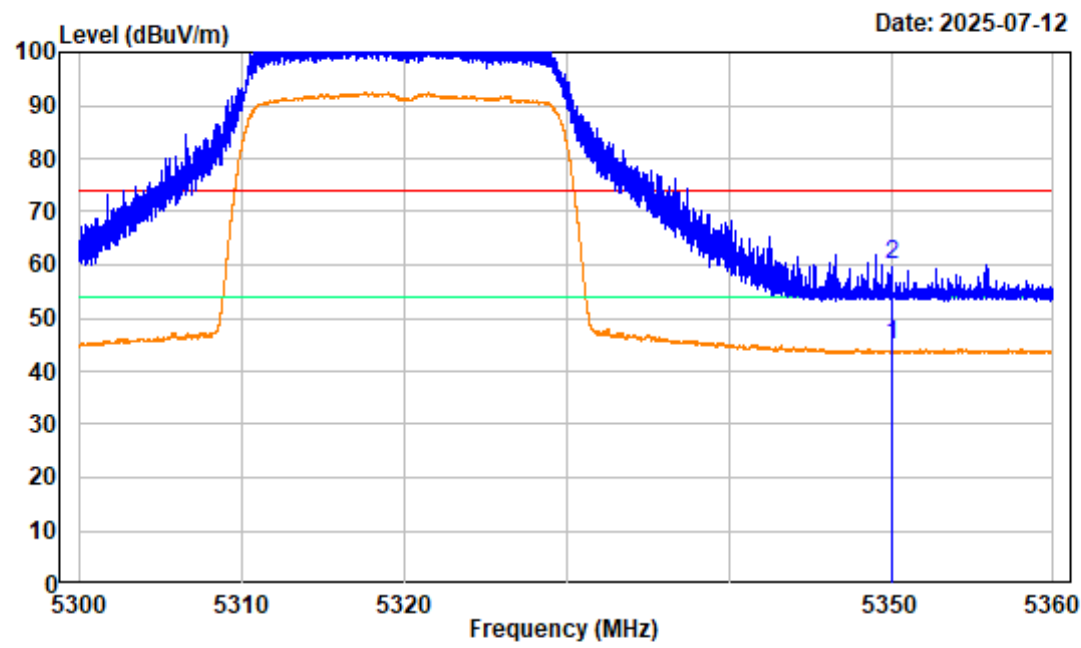

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5320MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.84	45.03	54.00	-8.97 average
2	5350.000	-5.81	65.83	60.02	74.00	-13.98 peak


802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

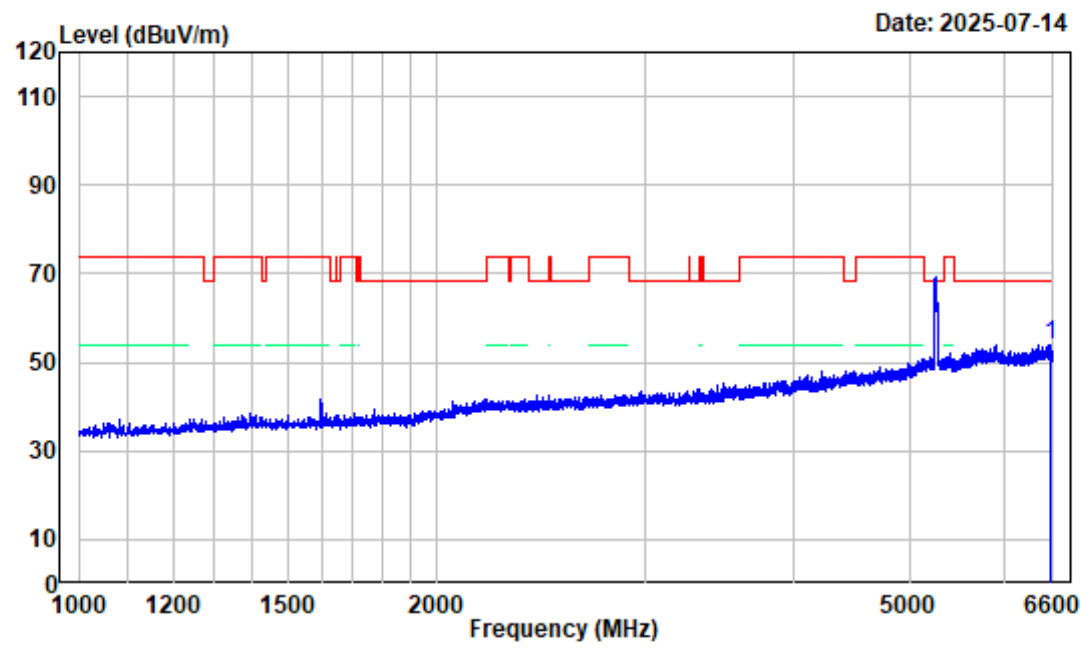

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5270MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6566.400	-3.66	57.56	53.90	68.20	-14.30	Peak


802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

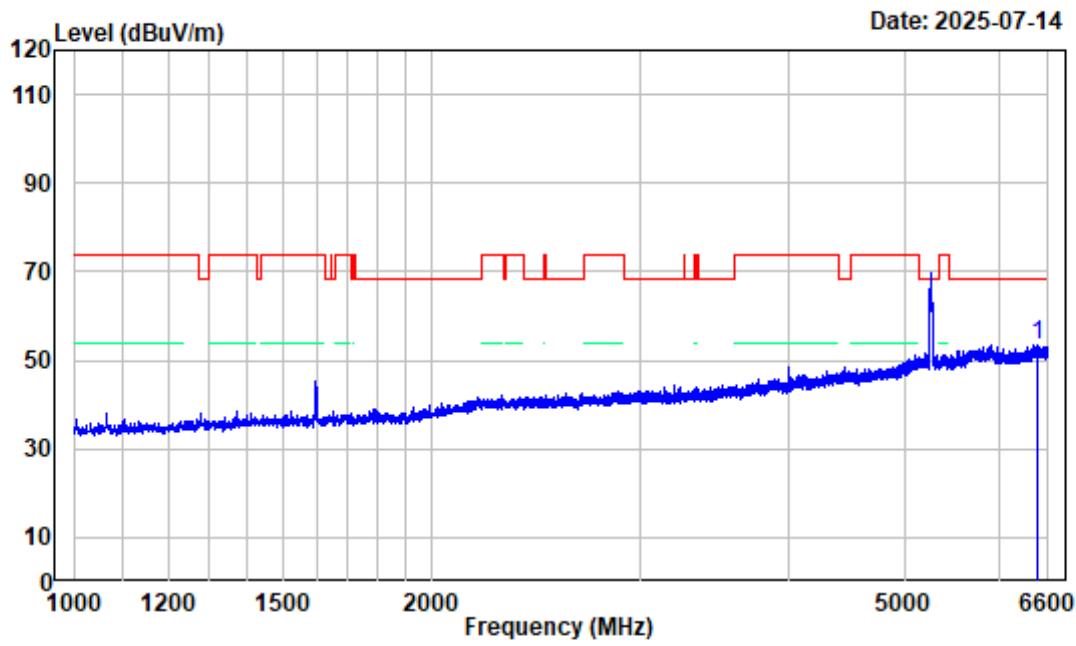

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5270MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6454.400	-3.63	57.18	53.55	68.20	-14.65 Peak


802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

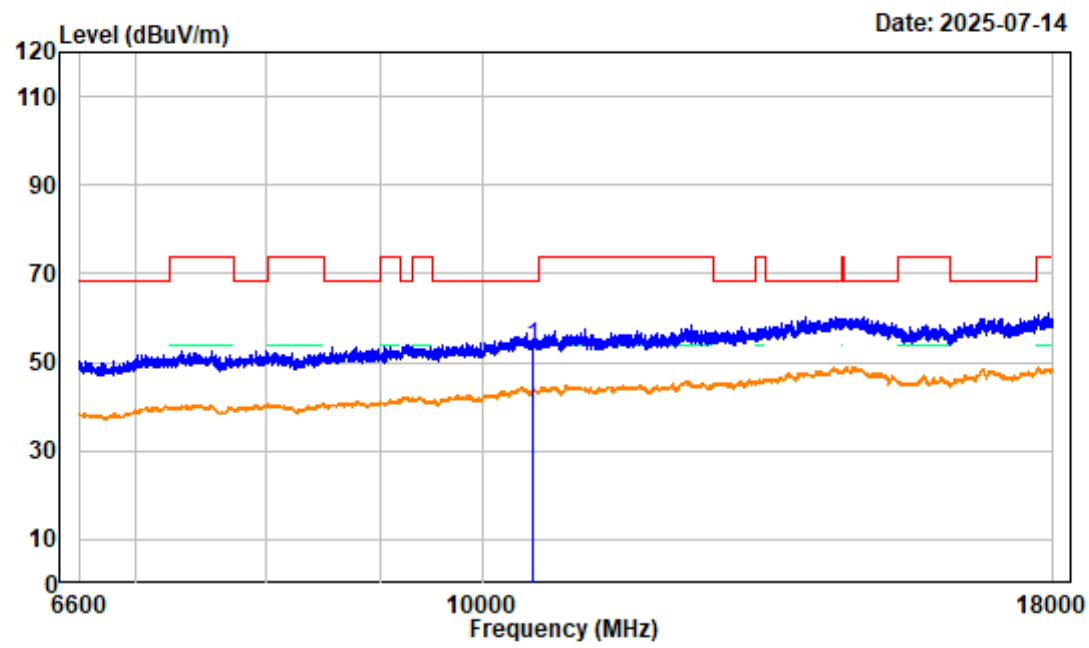

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5270MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10540.130	4.11	49.13	53.24	68.20	-14.96	Peak


802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

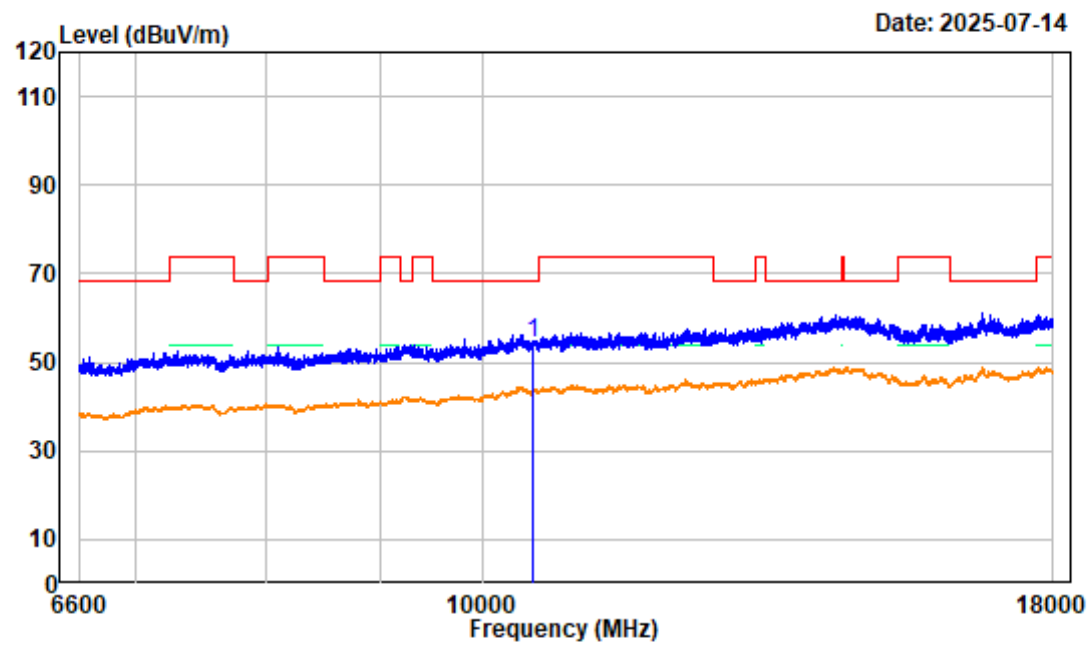

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5270MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10540.130	4.11	50.17	54.28	68.20	-13.92	Peak


802.11AX40 Low Channel Bandedge_HORIZONTAL

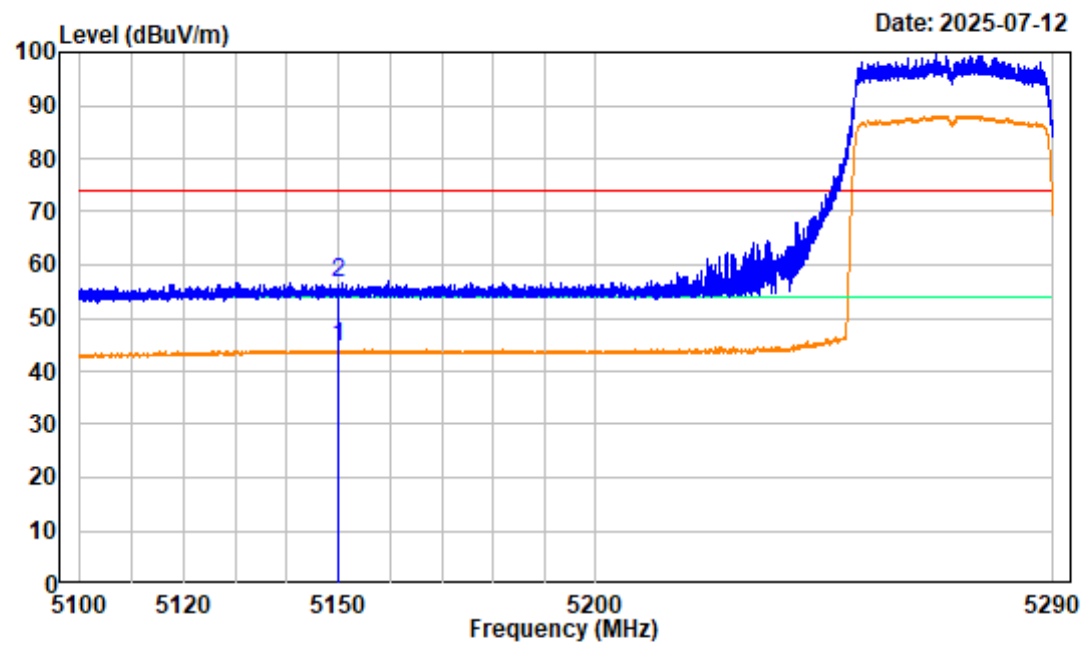

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5270MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.56	44.57	54.00	-9.43 average
2	5150.000	-5.99	62.45	56.46	74.00	-17.54 peak


802.11AX40 Low Channel Bandedge_VERTICAL

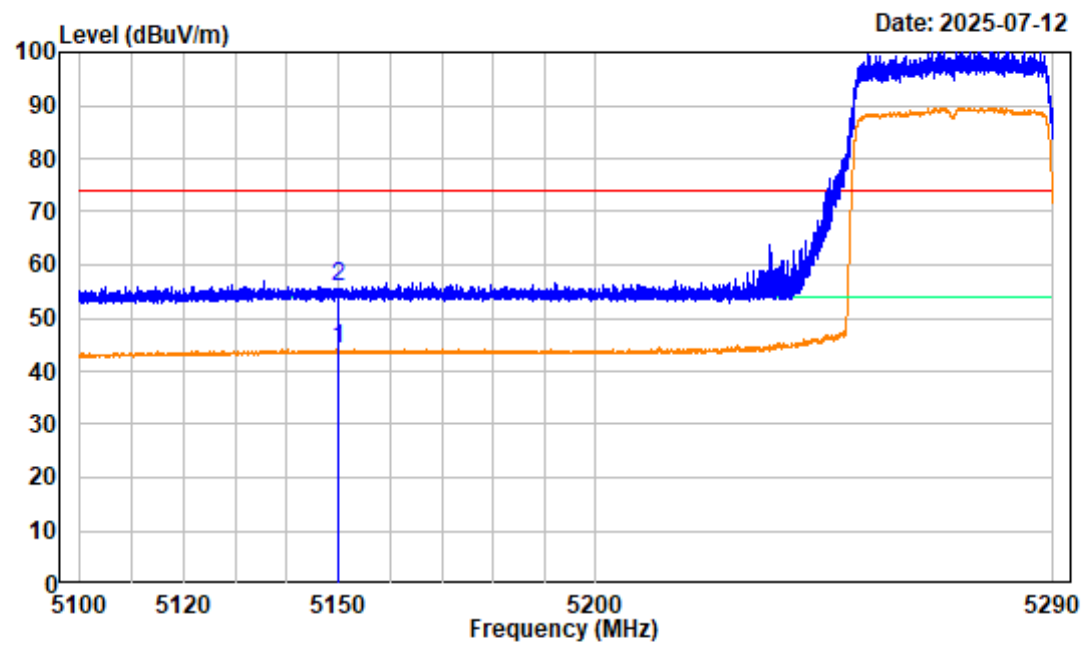

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5270MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-5.99	50.00	44.01	54.00	-9.99 average
2	5150.000	-5.99	61.98	55.99	74.00	-18.01 peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

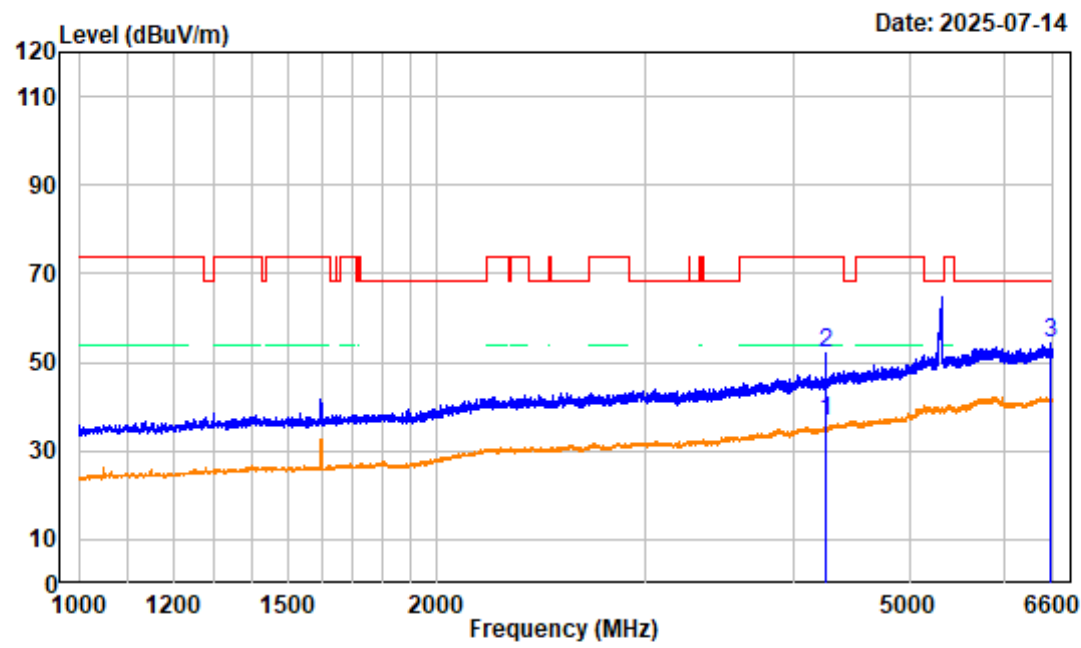

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5310MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4248.700	-7.89	44.36	36.47	54.00	-17.53 Average
2	4248.700	-7.89	60.02	52.13	74.00	-21.87 Peak
3	6560.100	-3.68	58.04	54.36	68.20	-13.84 Peak


802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

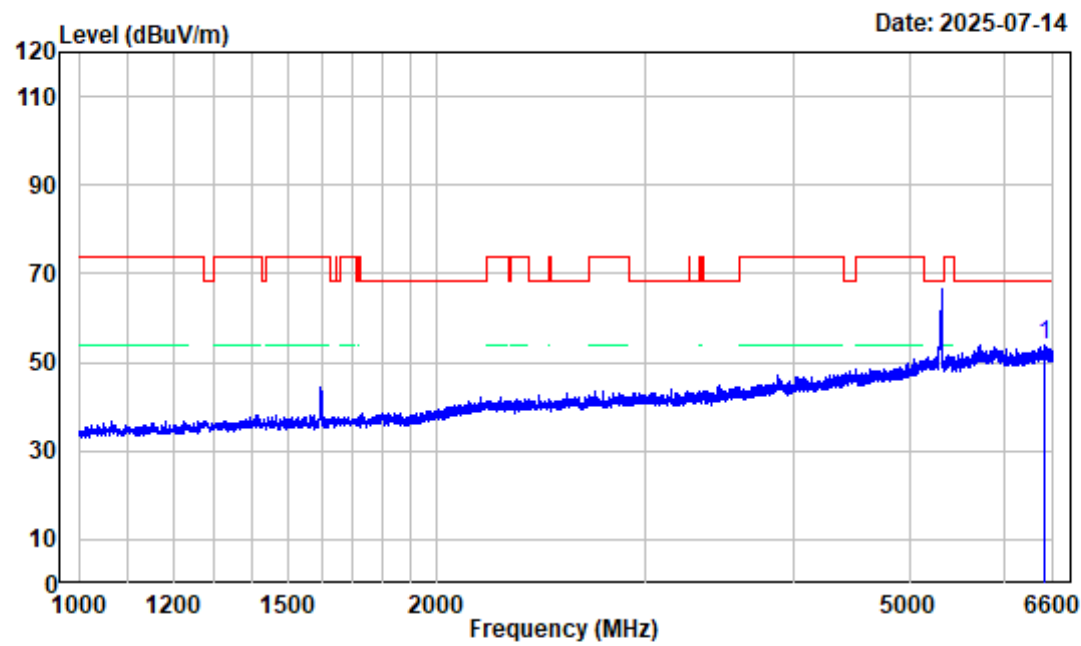

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5310MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6495.000	-3.80	57.91	54.11	68.20	-14.09	Peak

802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

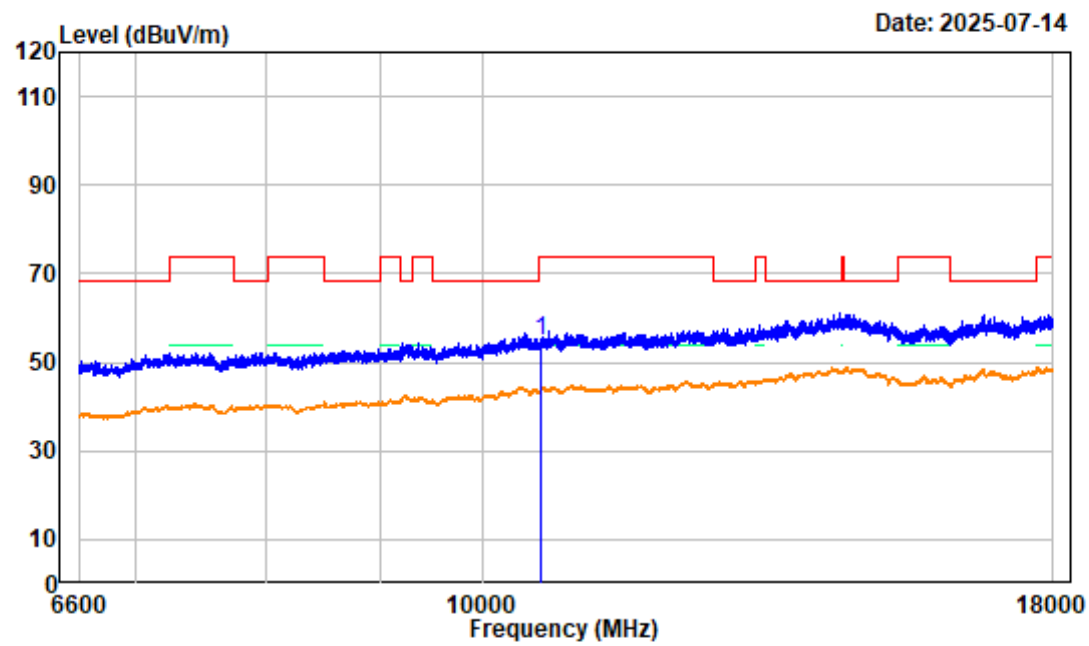

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX40 High Channel 5310MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10619.920	4.14	50.46	54.60	74.00	-19.40	Peak


802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

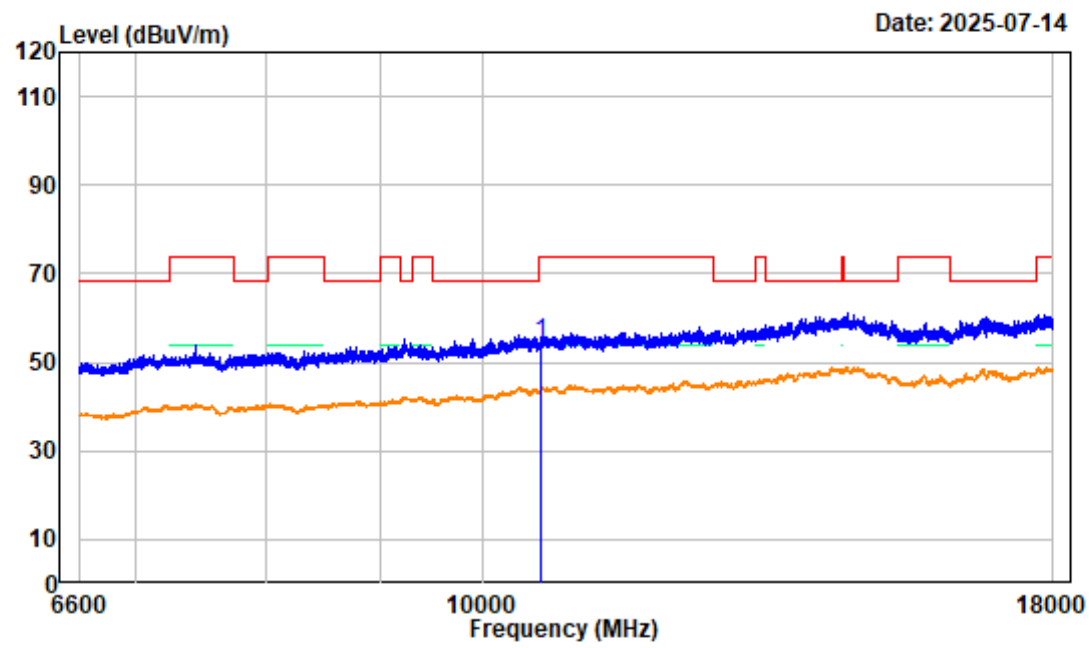

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5310MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10619.920	4.14	50.12	54.26	74.00	-19.74	Peak


802.11AX40 High Channel Bandedge_HORIZONTAL

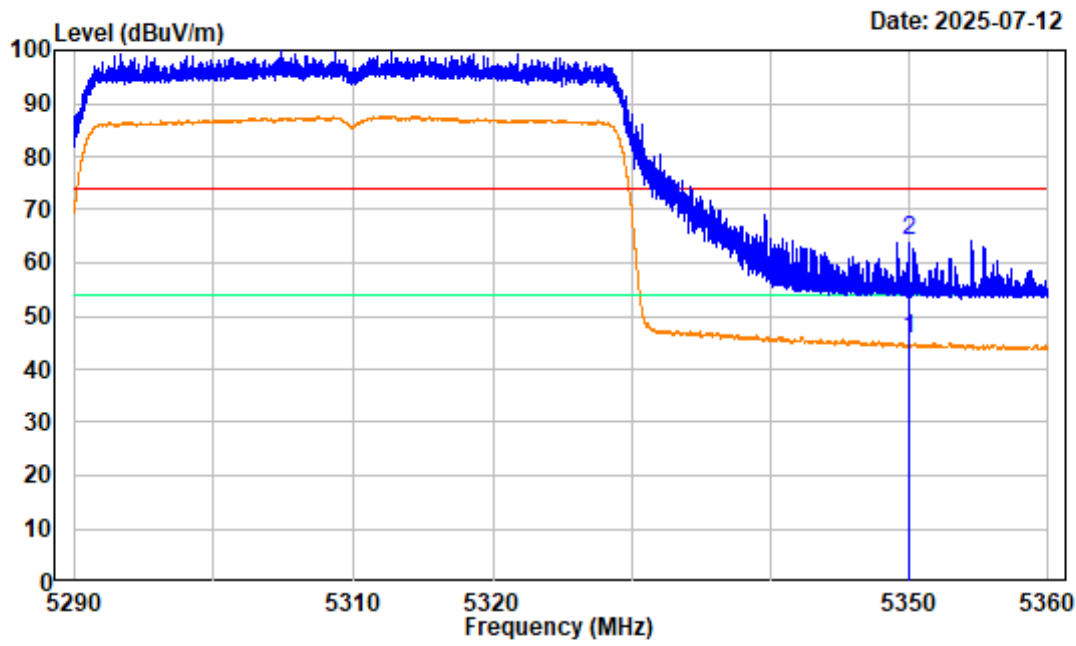

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5310MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	51.48	45.67	54.00	-8.33 average
2	5350.000	-5.81	69.87	64.06	74.00	-9.94 peak

802.11AX40 High Channel Bandedge_VERTICAL

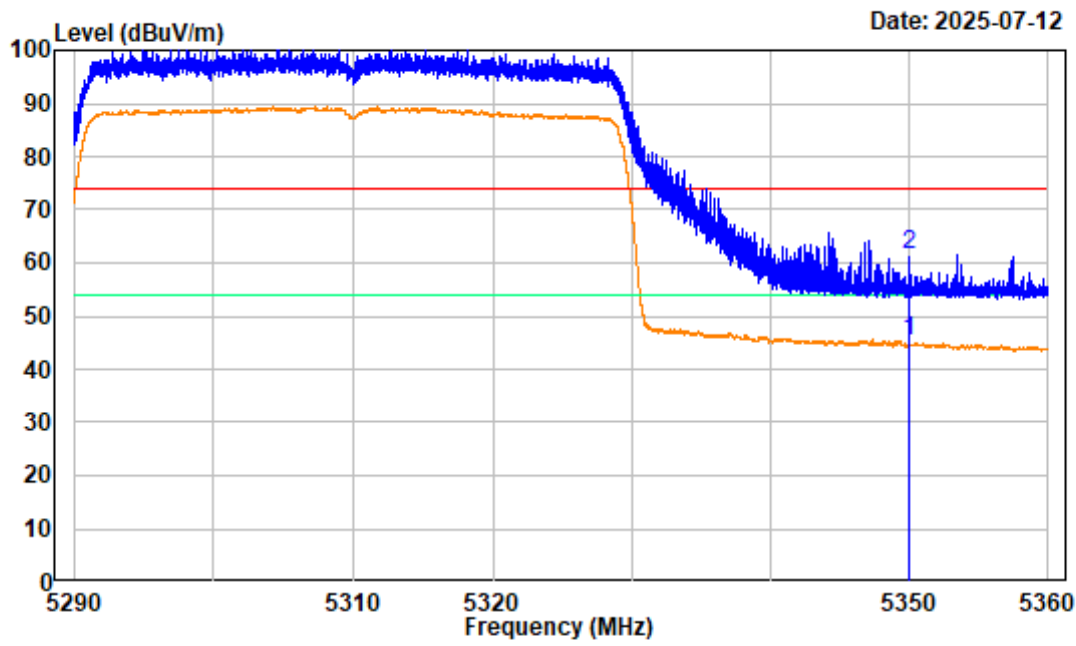


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5310MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.81	50.99	45.18	54.00	-8.82 average
2	5350.000	-5.81	67.48	61.67	74.00	-12.33 peak

For Band3:


802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

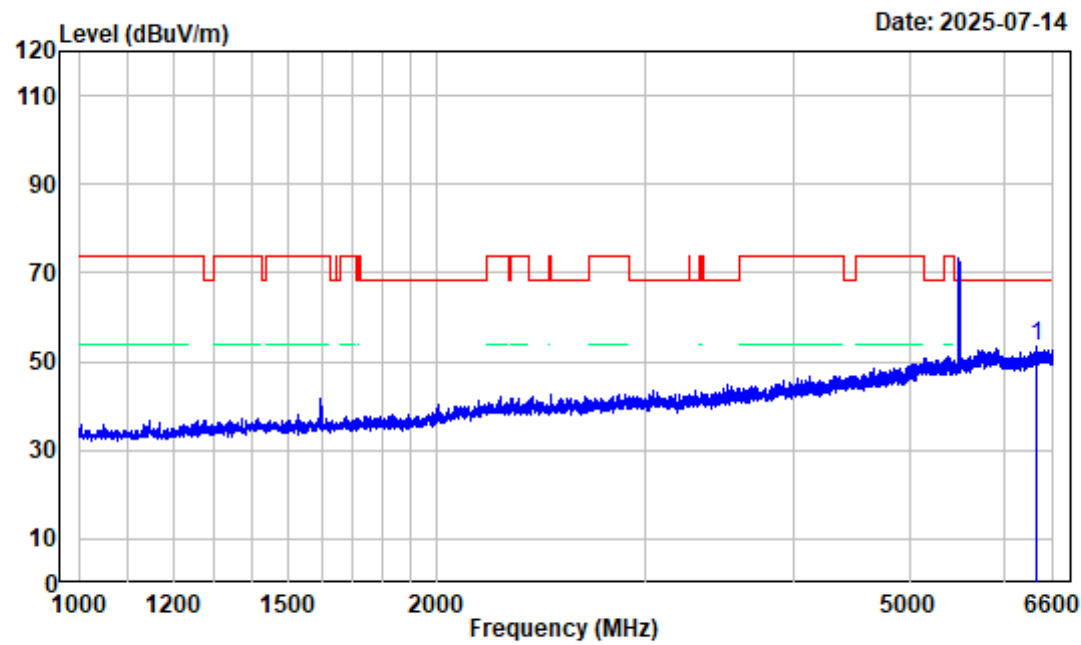

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6389.300	-3.86	57.43	53.57	68.20	-14.63	peak


802.11A Low Channel 1GHz-6.6GHz_VERTICAL

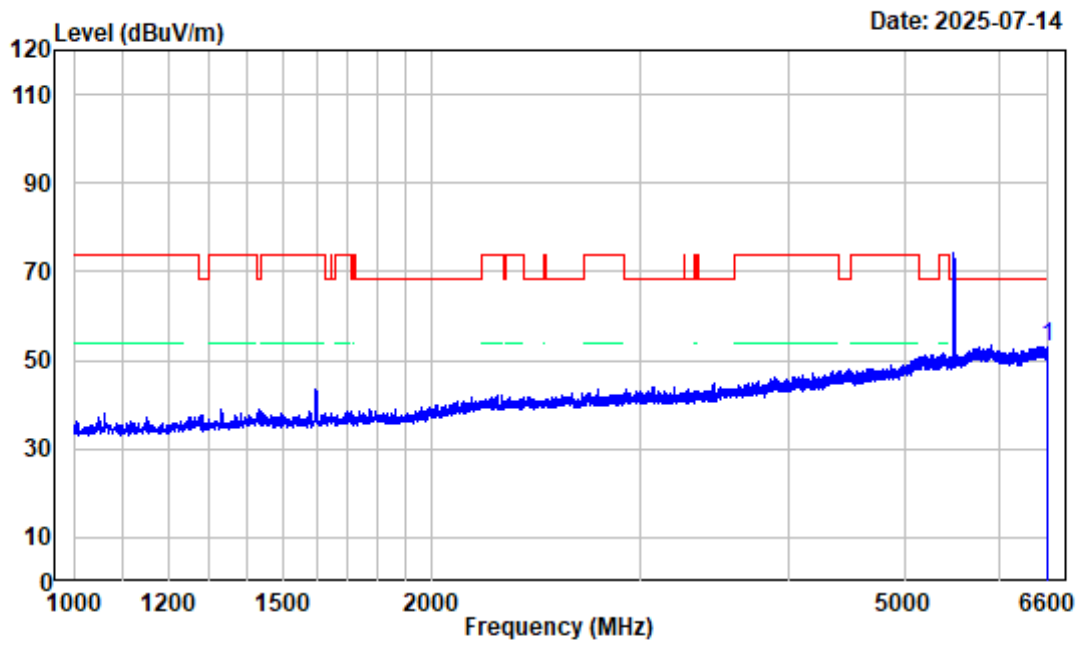

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6594.400	-3.56	56.73	53.17	68.20	-15.03 peak


802.11A Low Channel 6.6GHz-18GHZ_HORIZONTAL

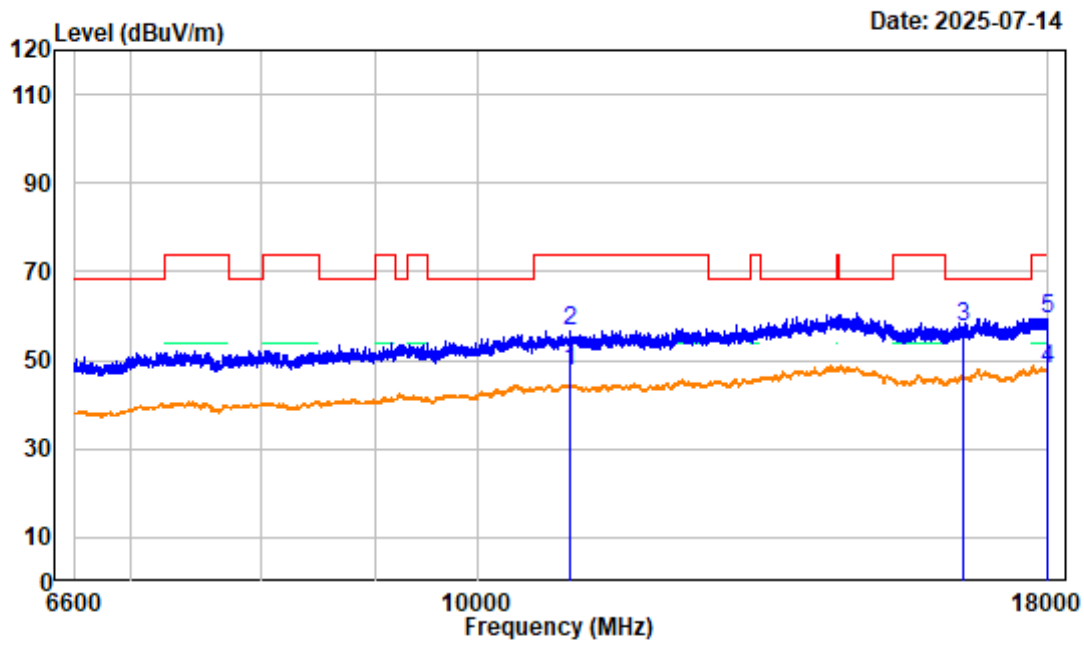

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.000	5.27	42.21	47.48	54.00	-6.52	average
2 11000.000	5.27	51.52	56.79	74.00	-17.21	peak
3 16500.000	5.92	51.78	57.70	68.20	-10.50	peak
4 17972.930	8.25	39.57	47.82	54.00	-6.18	average
5 17972.930	8.25	51.13	59.38	74.00	-14.62	peak


802.11A Low Channel 6.6GHz-18GHZ_VERTICAL

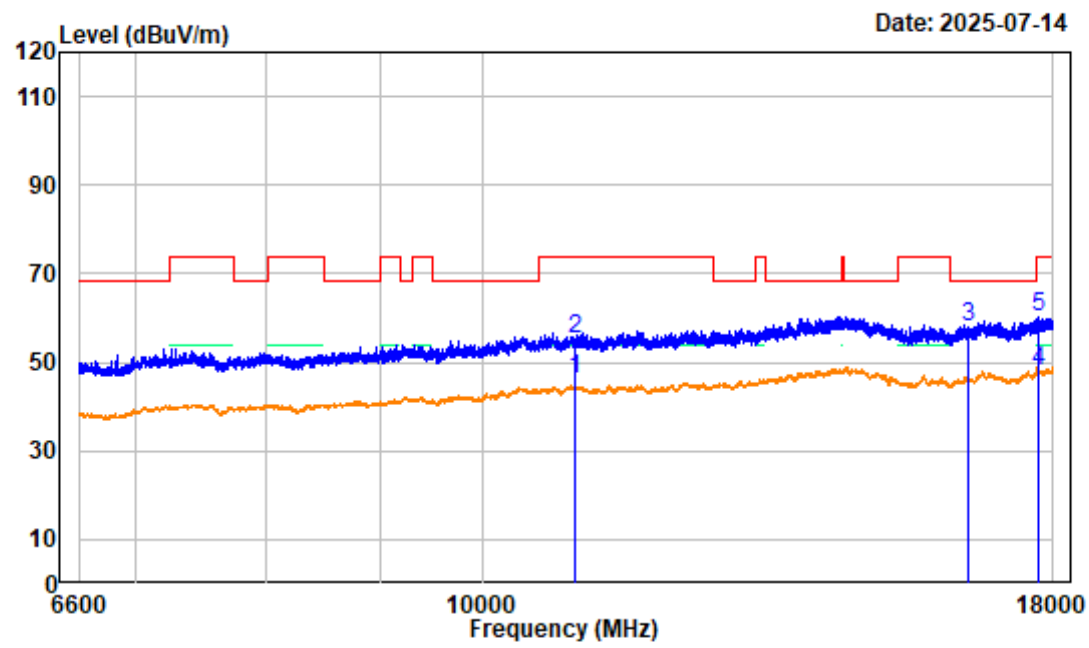

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.000	5.27	40.97	46.24	54.00	-7.76	average
2 11000.000	5.27	50.02	55.29	74.00	-18.71	peak
3 16500.000	5.92	52.09	58.01	68.20	-10.19	peak
4 17747.780	7.71	40.27	47.98	54.00	-6.02	average
5 17747.780	7.71	52.45	60.16	74.00	-13.84	peak


802.11A Low Channel Bandedge_HORIZONTAL

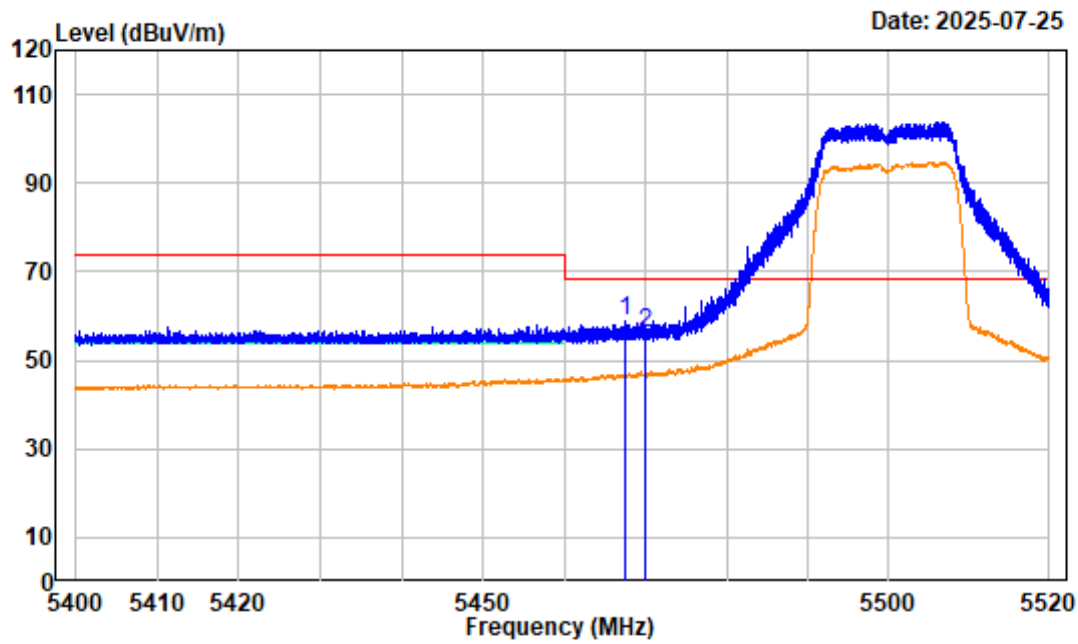

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5467.485	-5.59	64.54	58.95	68.20	-9.25 Peak
2	5470.005	-5.61	61.74	56.13	68.20	-12.07 Peak


802.11A Low Channel Bandedge_VERTICAL

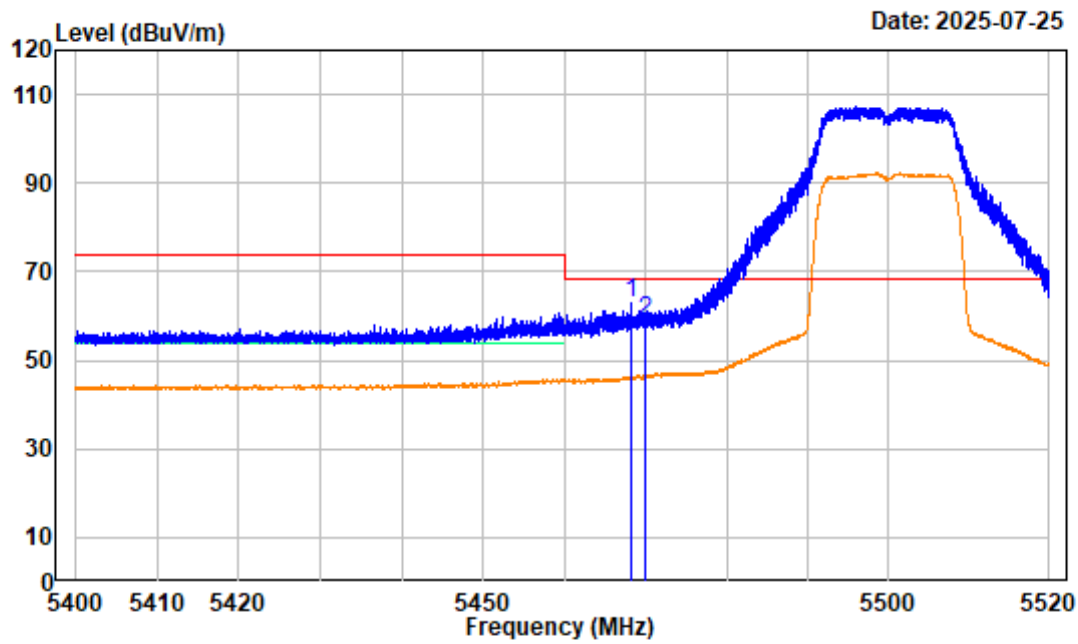

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5468.235	-5.61	68.35	62.74	68.20	-5.46 Peak
2	5470.005	-5.61	64.40	58.79	68.20	-9.41 Peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

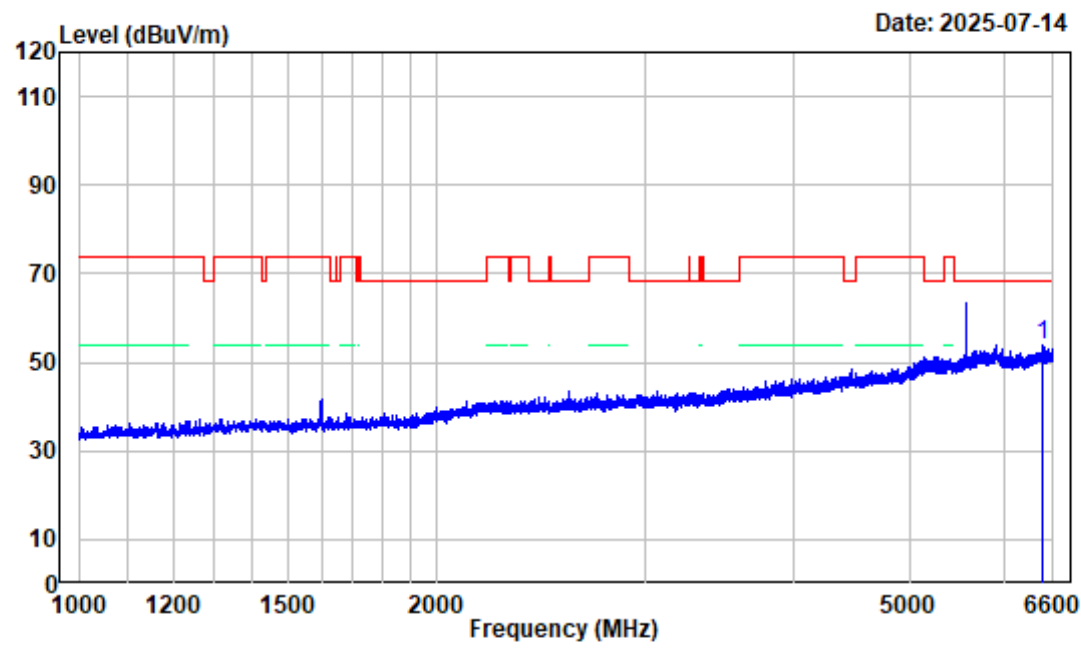

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6464.200	-3.68	57.58	53.90	68.20	-14.30 peak


802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

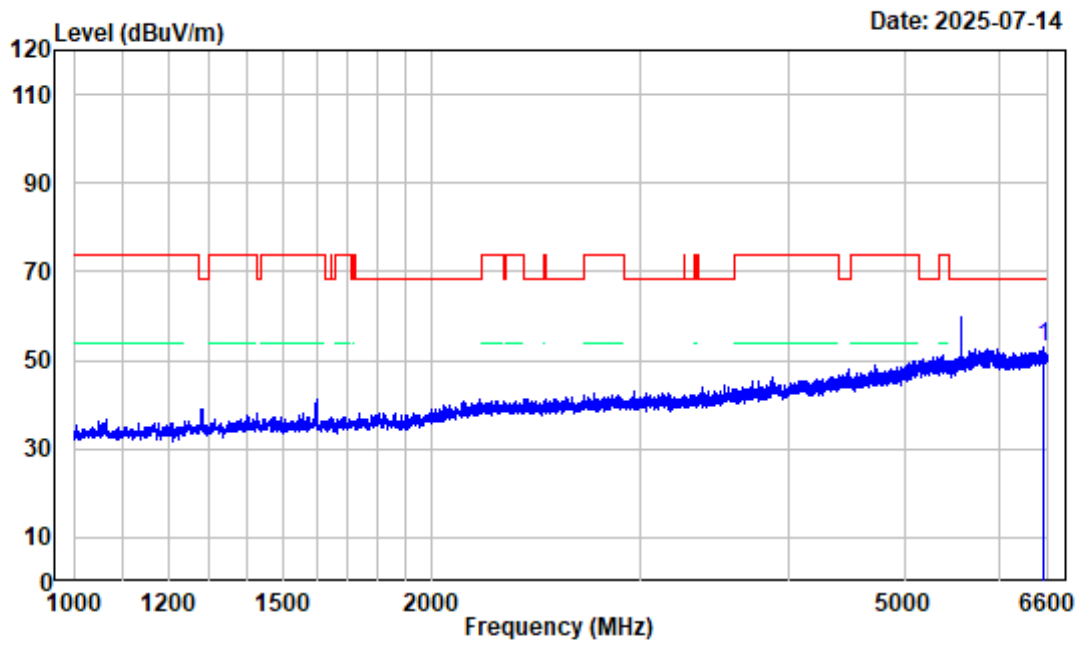

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6550.300	-3.72	56.51	52.79	68.20	-15.41 peak


802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

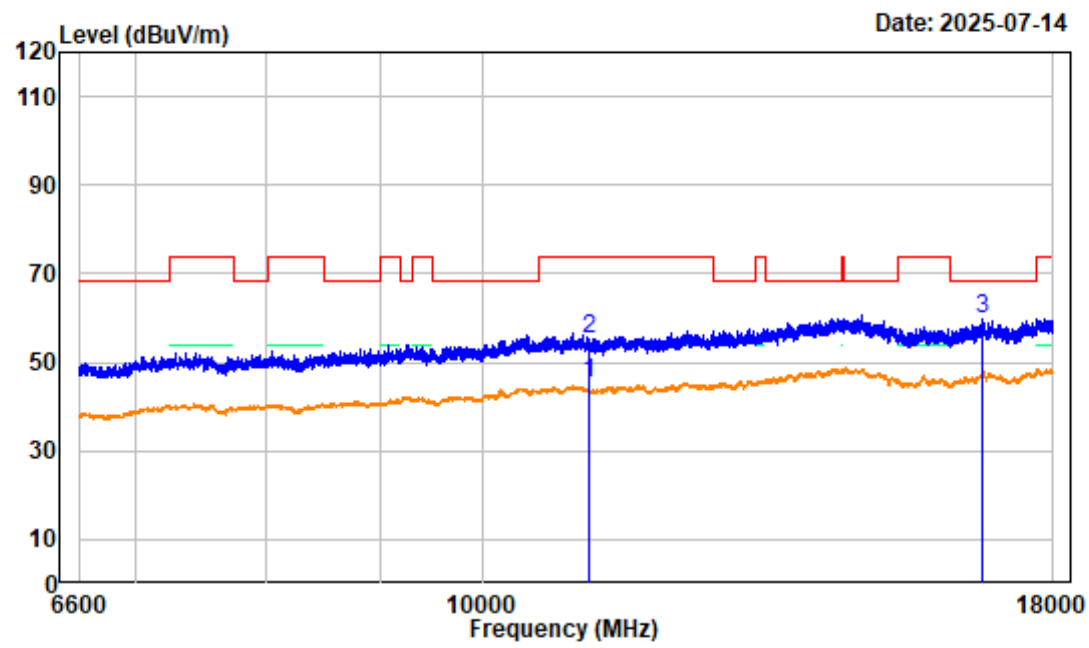

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	40.81	45.13	54.00	-8.87	average
2 11160.000	4.32	50.82	55.14	74.00	-18.86	peak
3 16740.000	7.63	51.93	59.56	68.20	-8.64	peak


802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

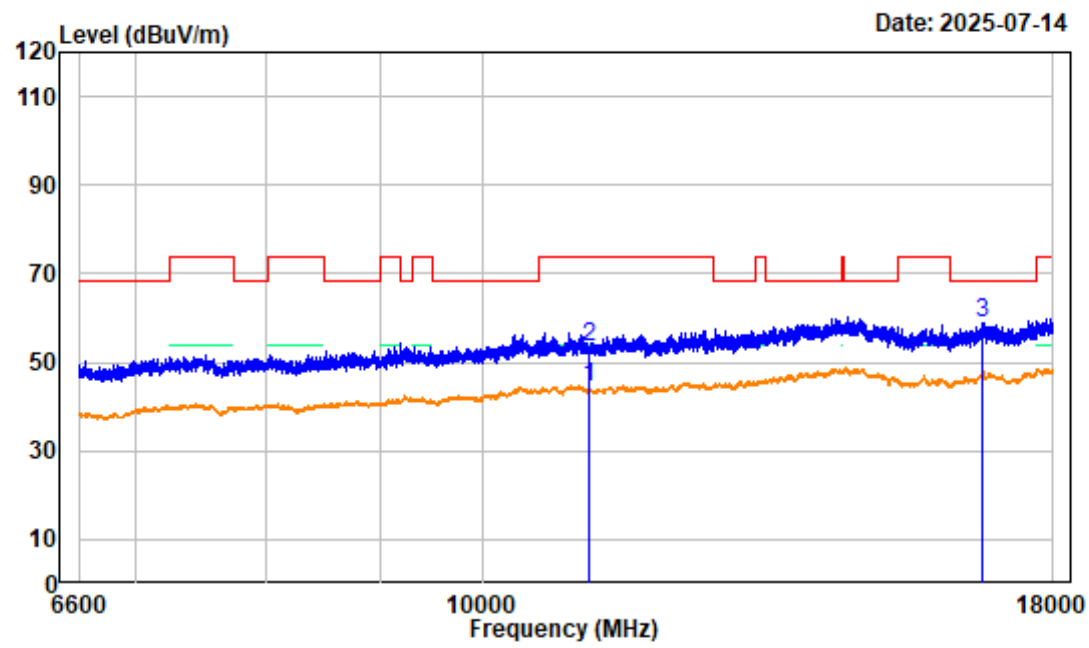

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	40.10	44.42	54.00	-9.58	Average
2 11160.000	4.32	49.08	53.40	74.00	-20.60	peak
3 16740.000	7.63	51.18	58.81	68.20	-9.39	peak


802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

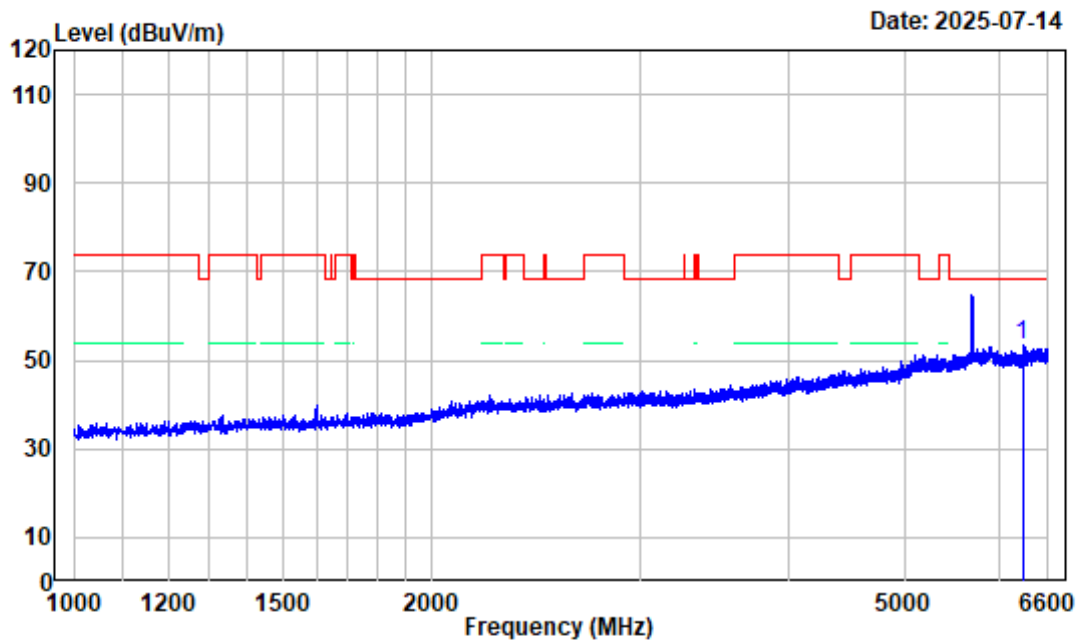

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6280.800	-4.50	57.81	53.31	68.20	-14.89 peak


802.11A High Channel 1GHz-6.6GHz_VERTICAL

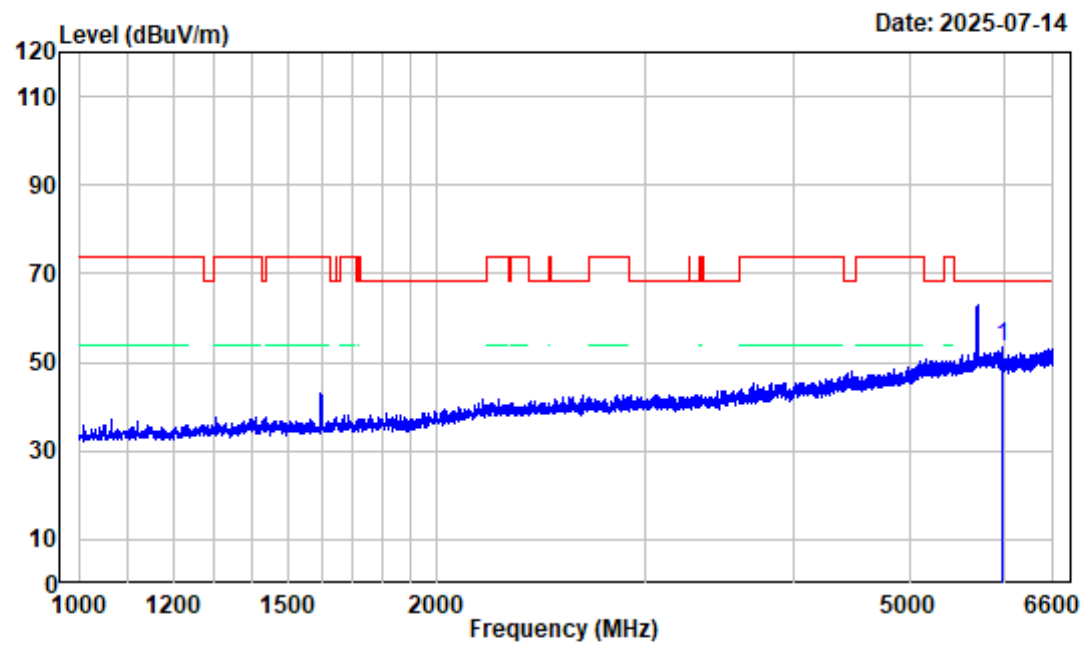

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5982.600	-4.89	58.11	53.22	68.20	-14.98 peak


802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

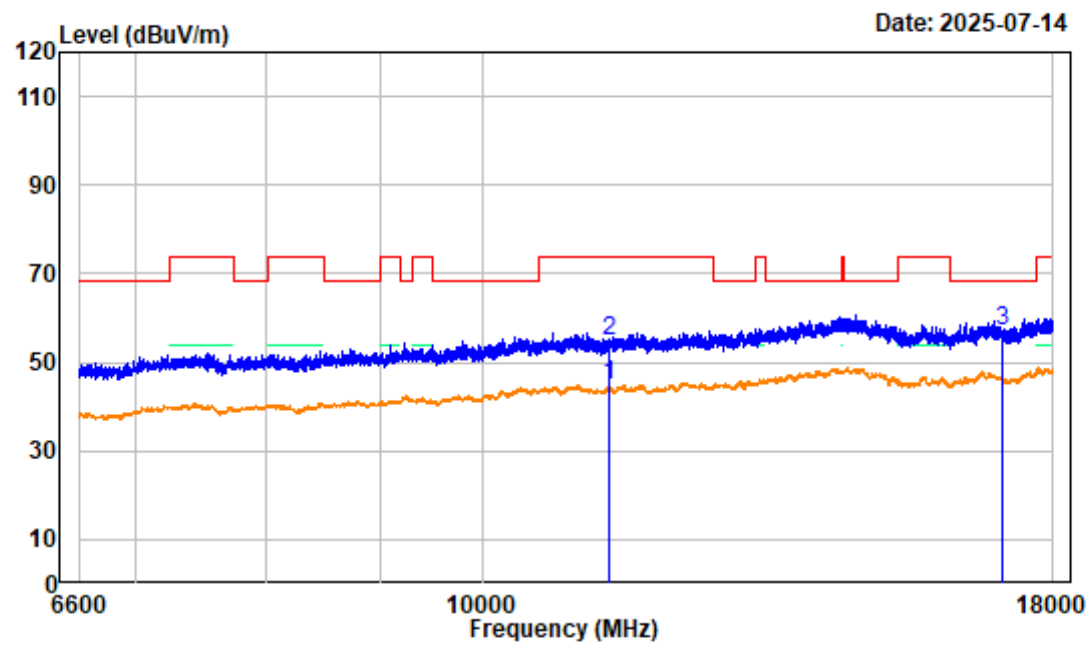

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	5.67	39.18	44.85	54.00	-9.15	average
2 11400.000	5.67	49.16	54.83	74.00	-19.17	peak
3 17100.000	6.92	49.92	56.84	68.20	-11.36	peak

802.11A High Channel 6.6GHz-18GHz_VERTICAL

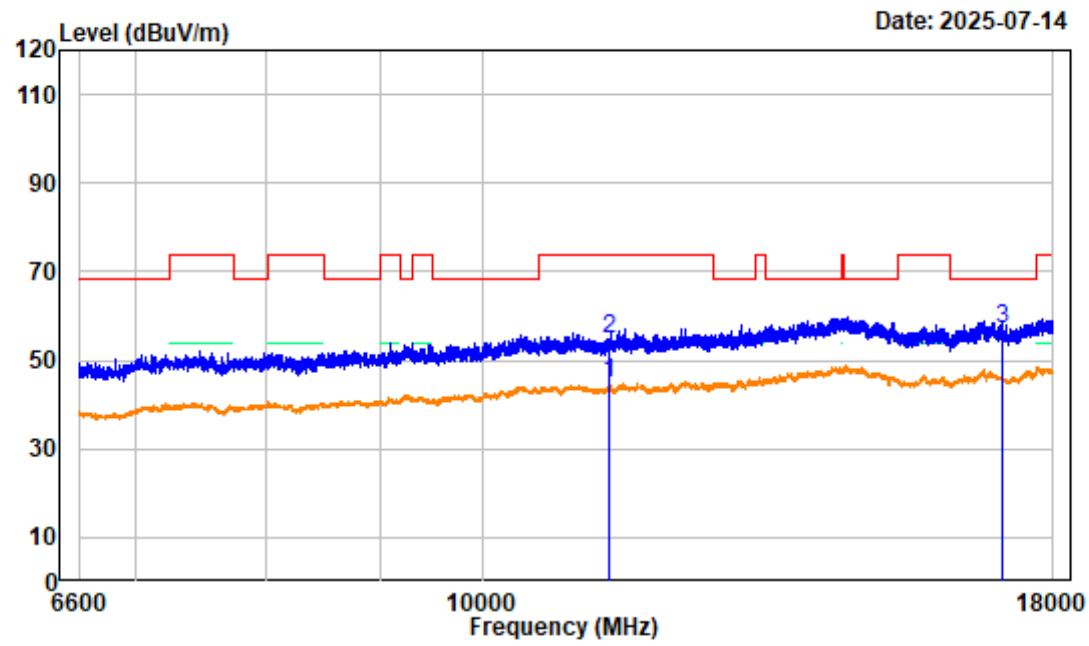

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A High Channel 5700MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	5.67	39.16	44.83	54.00	-9.17	average
2 11400.000	5.67	49.22	54.89	74.00	-19.11	peak
3 17100.000	6.92	50.28	57.20	68.20	-11.00	peak


802.11A High Channel Bandedge_HORIZONTAL

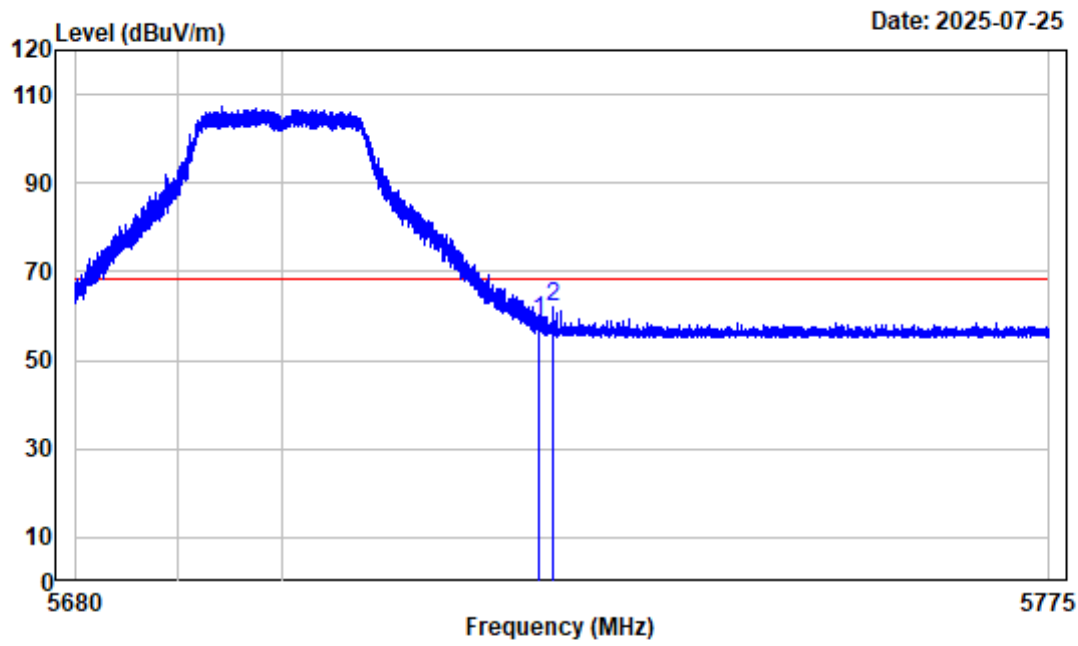

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	63.13	58.67	68.20	-9.53 Peak
2	5726.443	-4.46	66.32	61.86	68.20	-6.34 Peak


802.11A High Channel Bandedge_VERTICAL

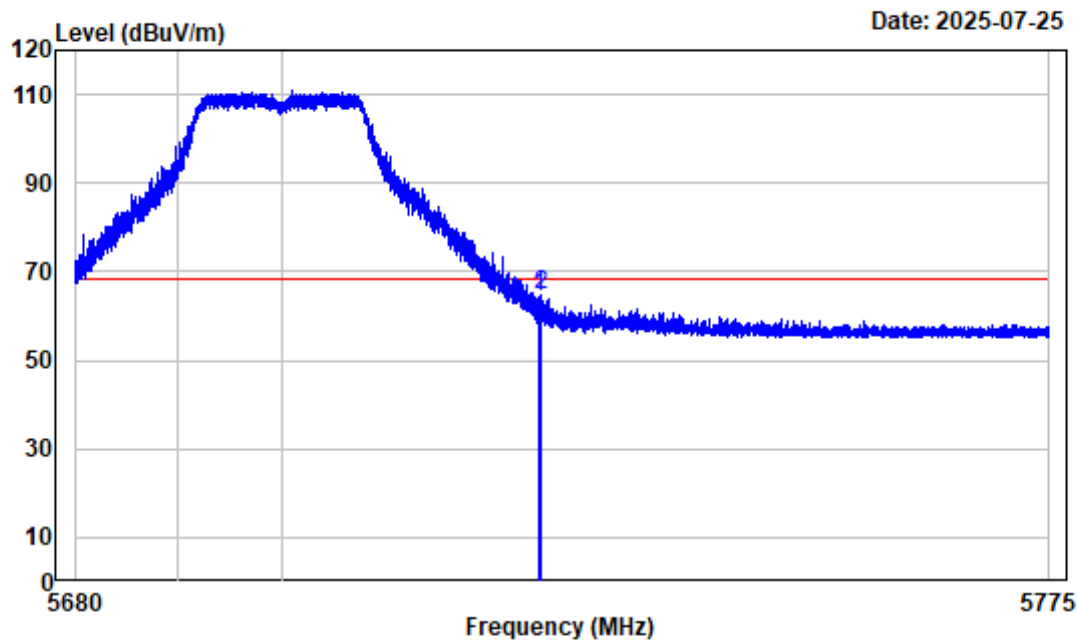

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	68.63	64.17	68.20	-4.03 Peak
2	5725.185	-4.45	68.99	64.54	68.20	-3.66 Peak


802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

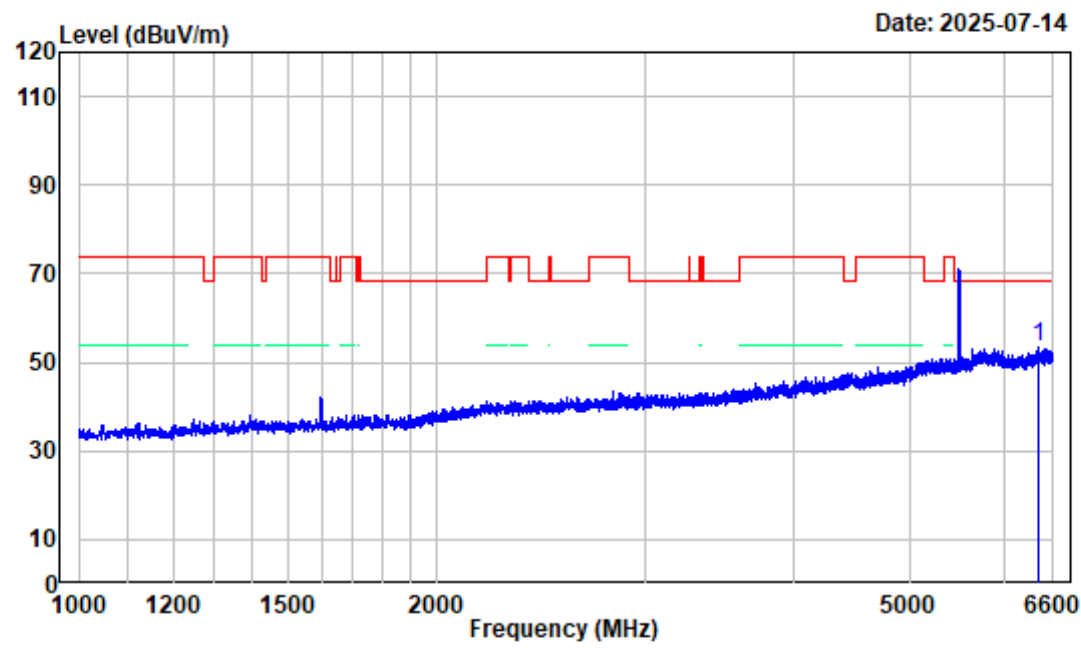

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6425.000	-3.64	57.25	53.61	68.20	-14.59	peak


802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

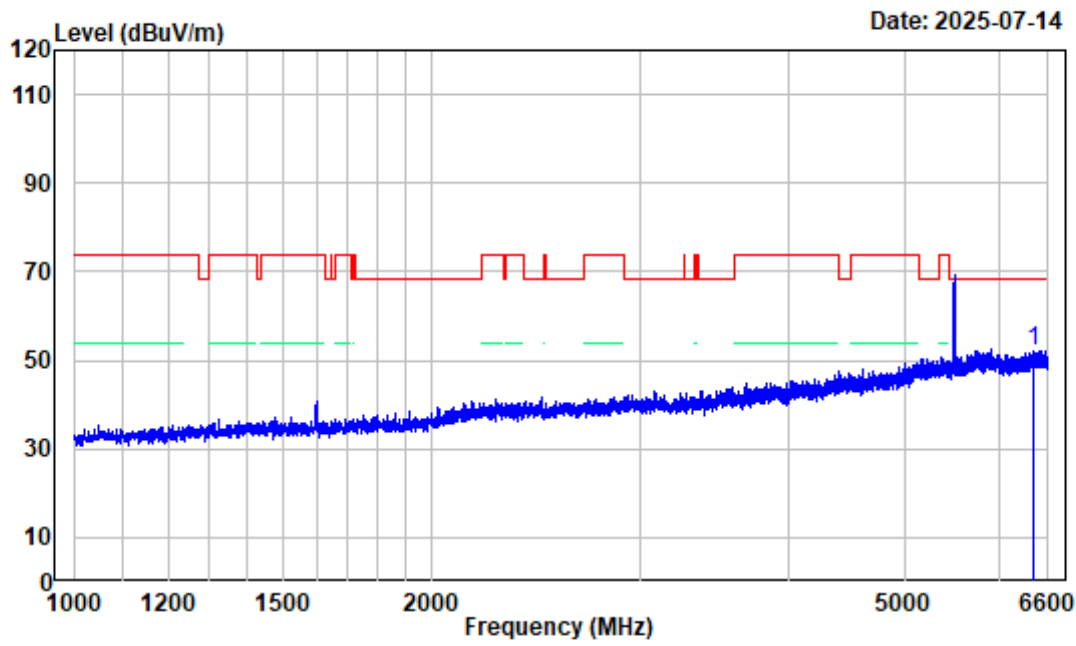

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6419.400	-3.64	55.69	52.05	68.20	-16.15	peak


802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

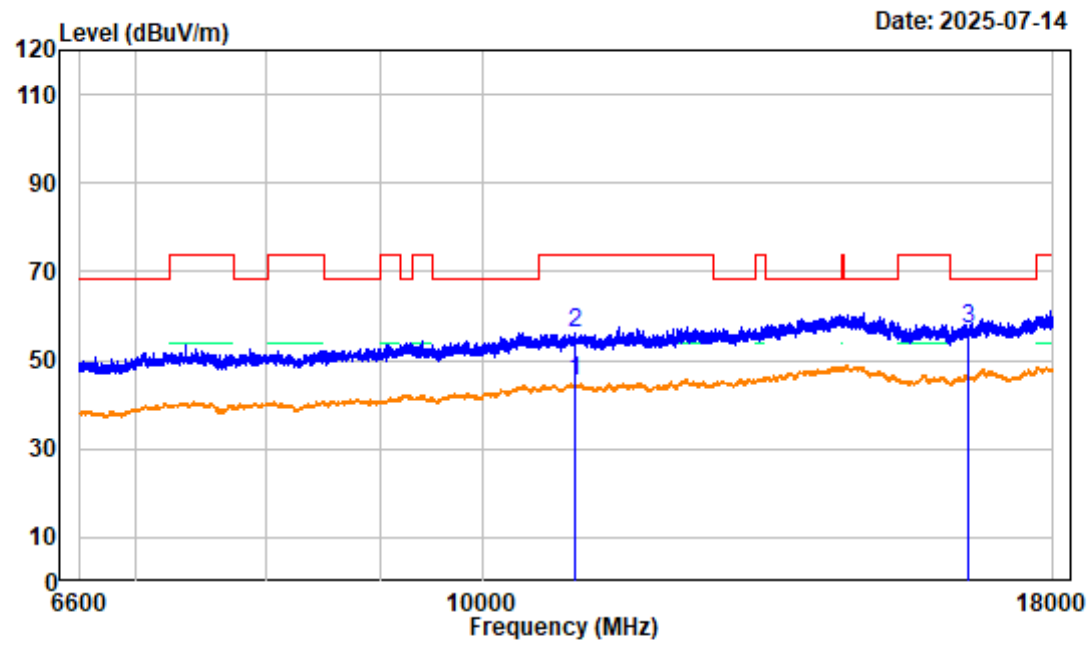

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.000	5.27	39.81	45.08	54.00	-8.92	average
2 11000.000	5.27	50.79	56.06	74.00	-17.94	peak
3 16500.000	5.92	51.08	57.00	68.20	-11.20	peak


802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

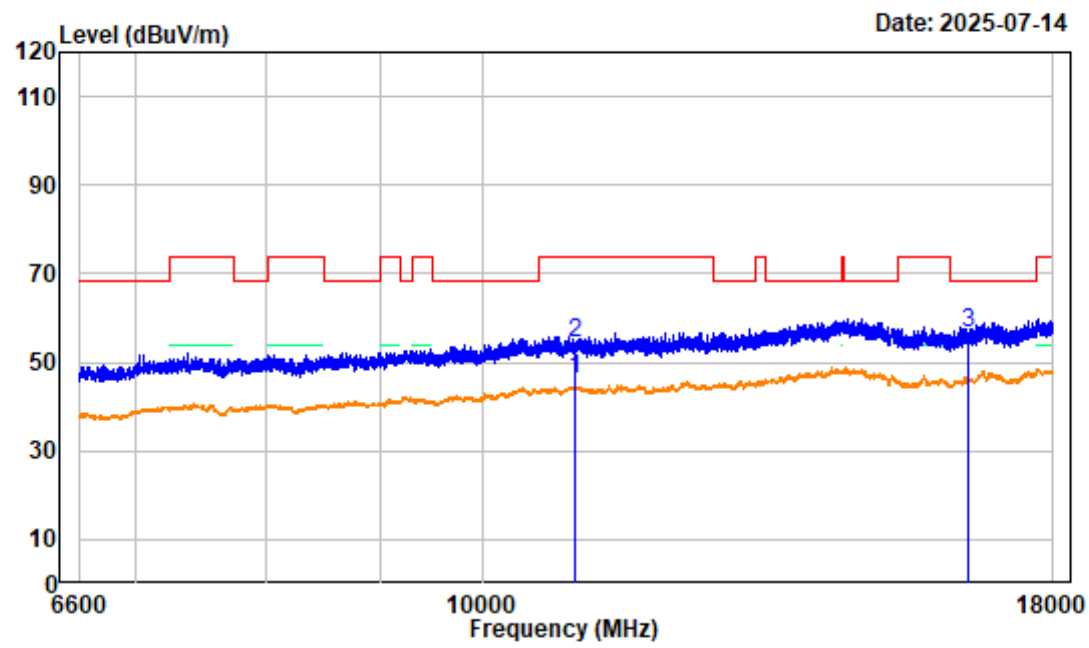

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.000	5.27	41.06	46.33	54.00	-7.67	average
2 11000.000	5.27	49.07	54.34	74.00	-19.66	peak
3 16500.000	5.92	50.81	56.73	68.20	-11.47	peak


802.11AC20 Low Channel Bandedge_HORIZONTAL

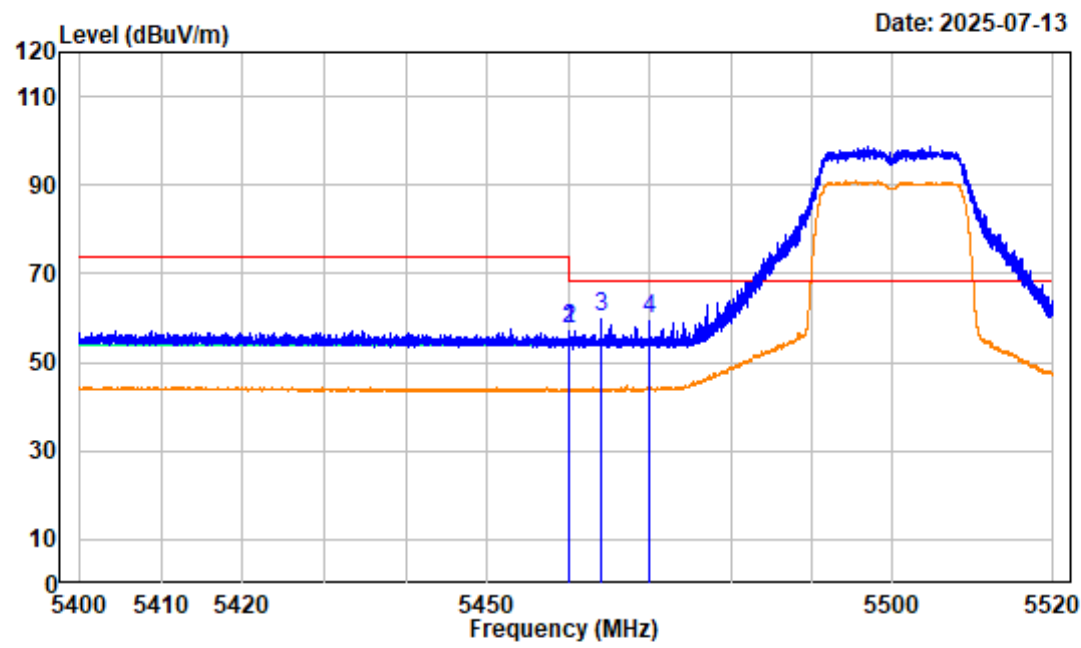

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	62.89	57.30	54.00	3.30	average
2	5460.000	-5.59	62.89	57.30	74.00	-16.70	peak
3	5464.050	-5.60	65.97	60.37	68.20	-7.83	Peak
4	5470.000	-5.61	65.37	59.76	68.20	-8.44	peak


802.11AC20 Low Channel Bandedge_VERTICAL

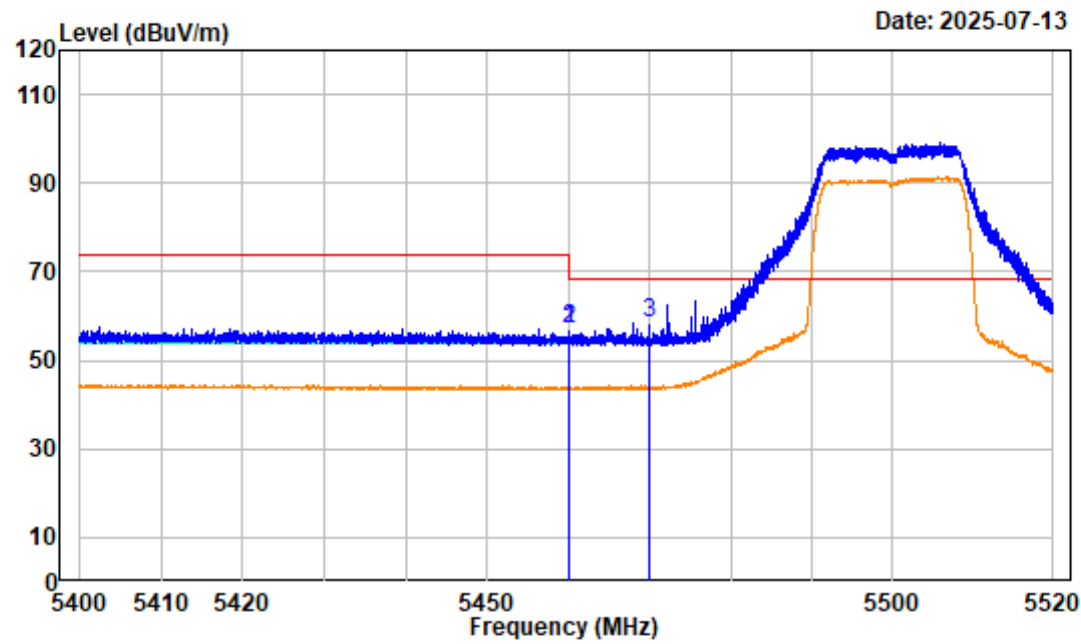

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	62.59	57.00	54.00	3.00	average
2	5460.000	-5.58	62.58	57.00	74.00	-17.00	peak
3	5470.000	-5.61	64.18	58.57	68.20	-9.63	peak


802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

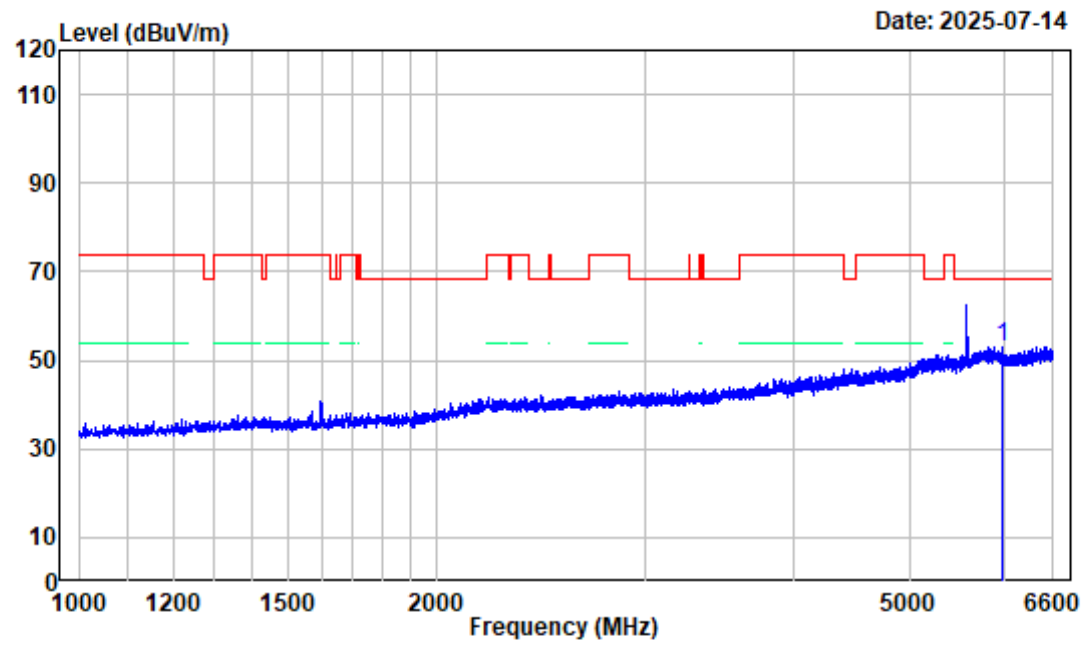

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5979.800	-4.87	57.77	52.90	68.20	-15.30	peak


802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

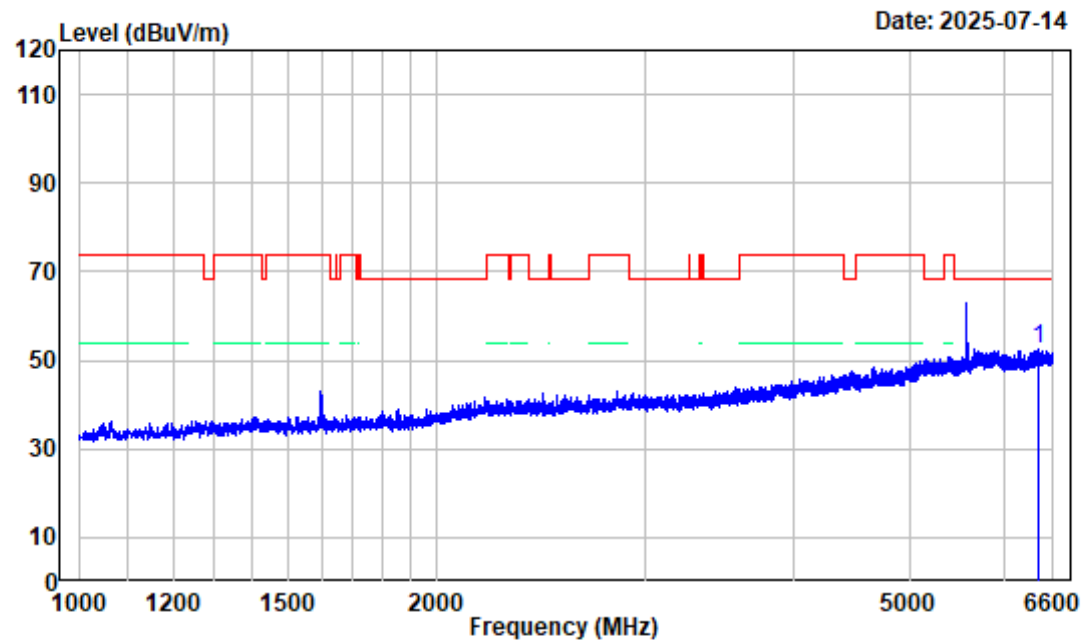

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6426.400	-3.64	56.04	52.40	68.20	-15.80 peak


802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

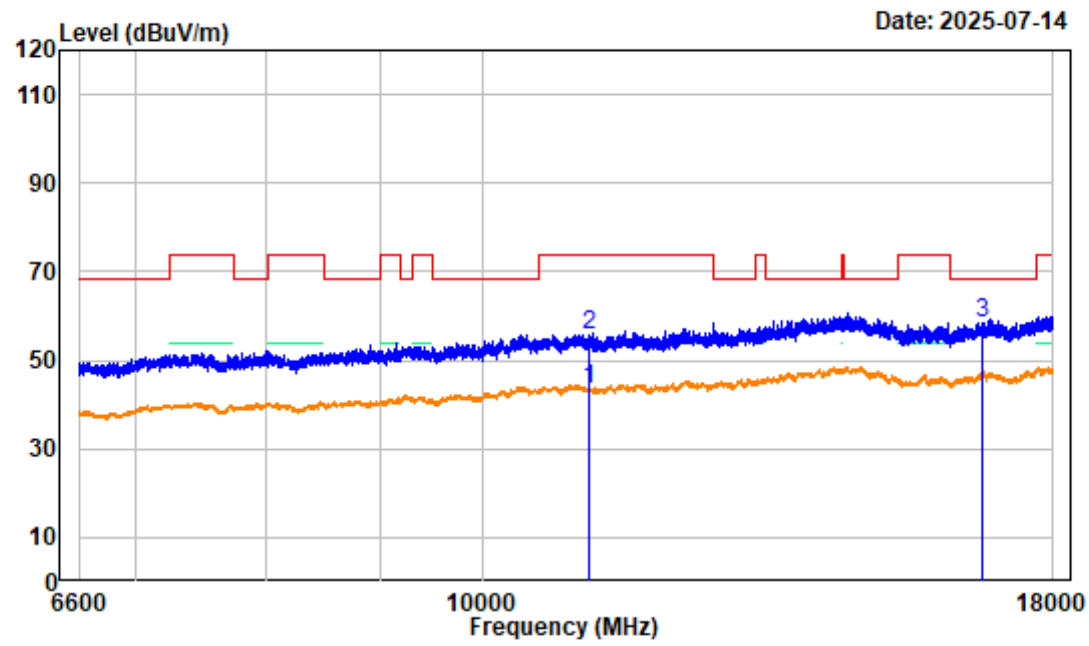

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	39.33	43.65	54.00	-10.35	average
2 11160.000	4.32	51.35	55.67	74.00	-18.33	peak
3 16740.000	7.63	50.59	58.22	68.20	-9.98	peak


802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

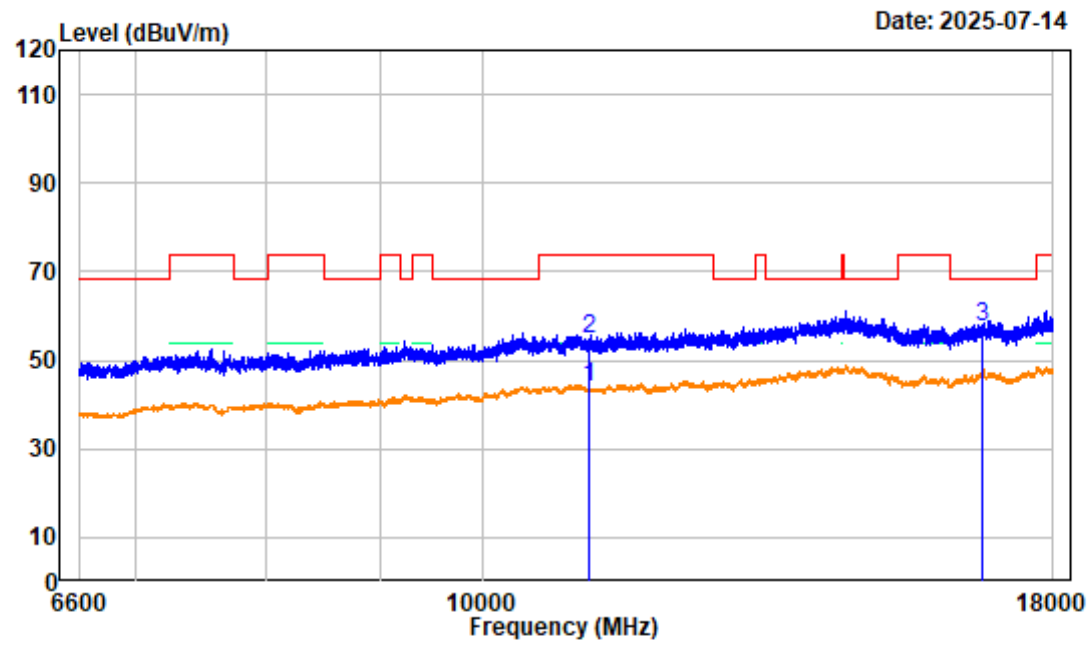

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	39.65	43.97	54.00	-10.03	average
2 11160.000	4.32	50.67	54.99	74.00	-19.01	peak
3 16740.000	7.63	50.10	57.73	68.20	-10.47	peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

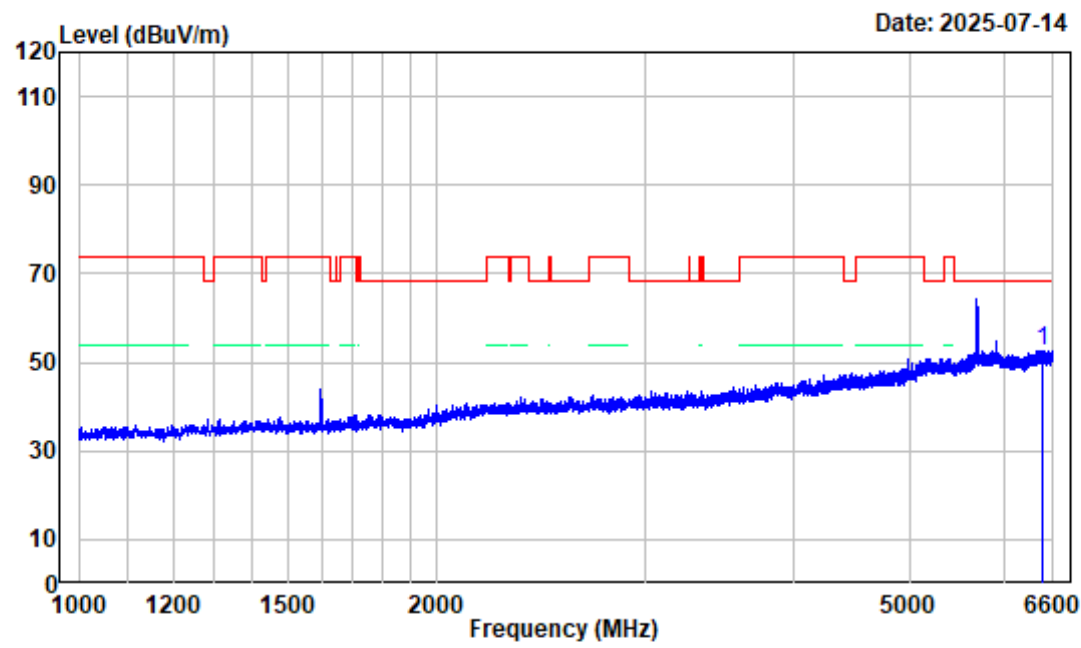

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6470.500	-3.70	56.18	52.48	68.20	-15.72	peak


802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

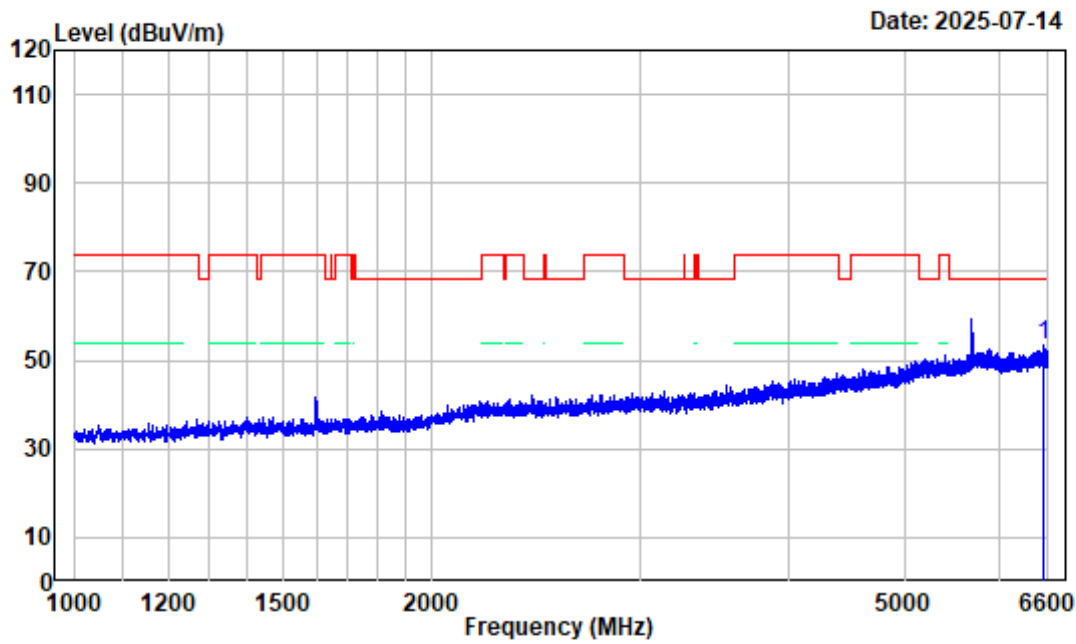

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6530.700	-3.76	57.02	53.26	68.20	-14.94	peak


802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

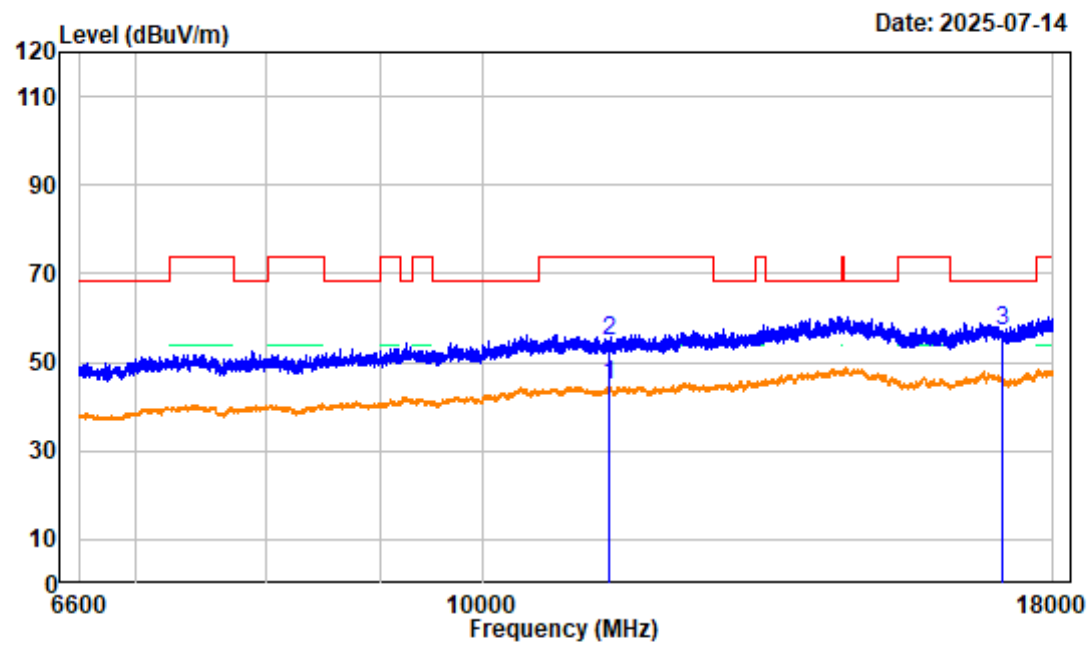

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	5.67	38.96	44.63	54.00	-9.37	average
2 11400.000	5.67	49.00	54.67	74.00	-19.33	peak
3 17100.000	6.92	50.33	57.25	68.20	-10.95	peak


802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

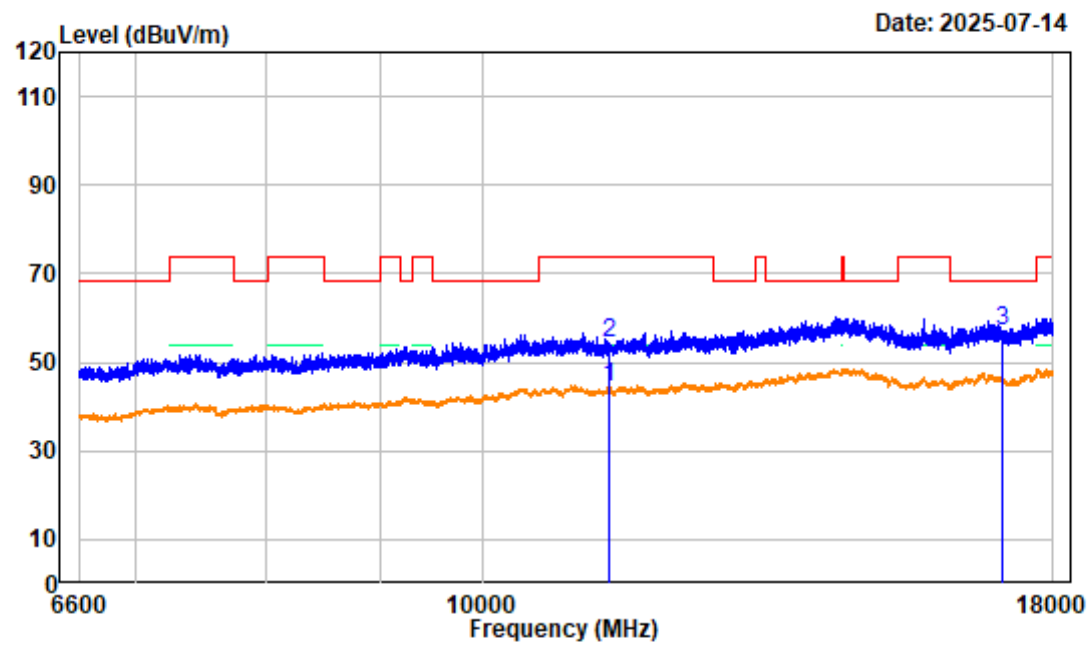

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	5.67	38.68	44.35	54.00	-9.65	average
2 11400.000	5.67	48.70	54.37	74.00	-19.63	peak
3 17100.000	6.92	50.02	56.94	68.20	-11.26	peak


802.11AC20 High Channel Bandedge_HORIZONTAL

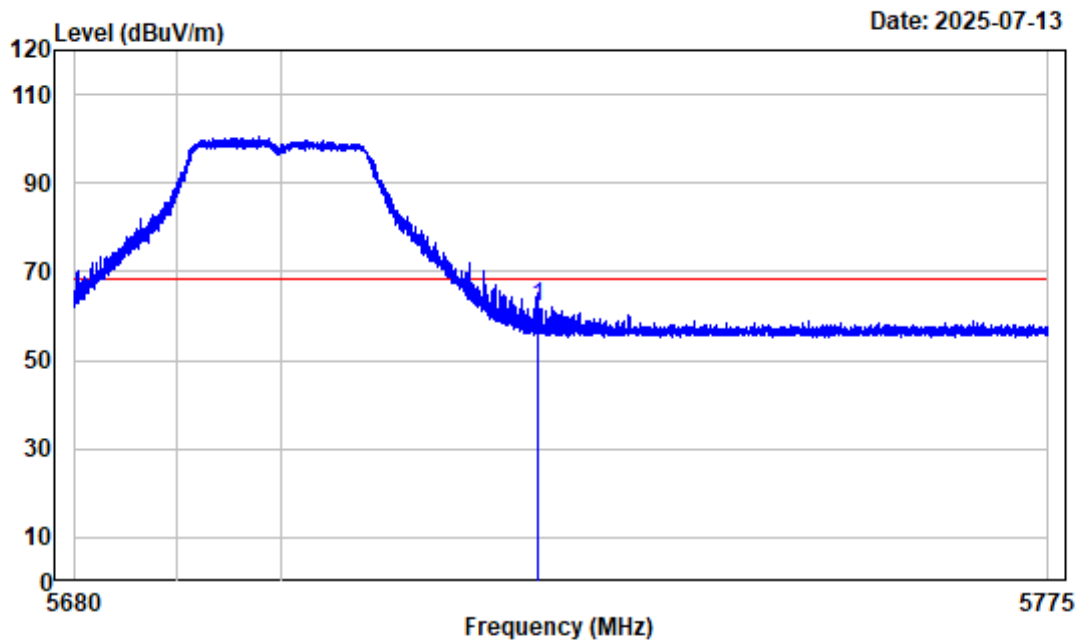

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-4.46	66.40	61.94	68.20	-6.26	peak


802.11AC20 High Channel Bandedge_VERTICAL

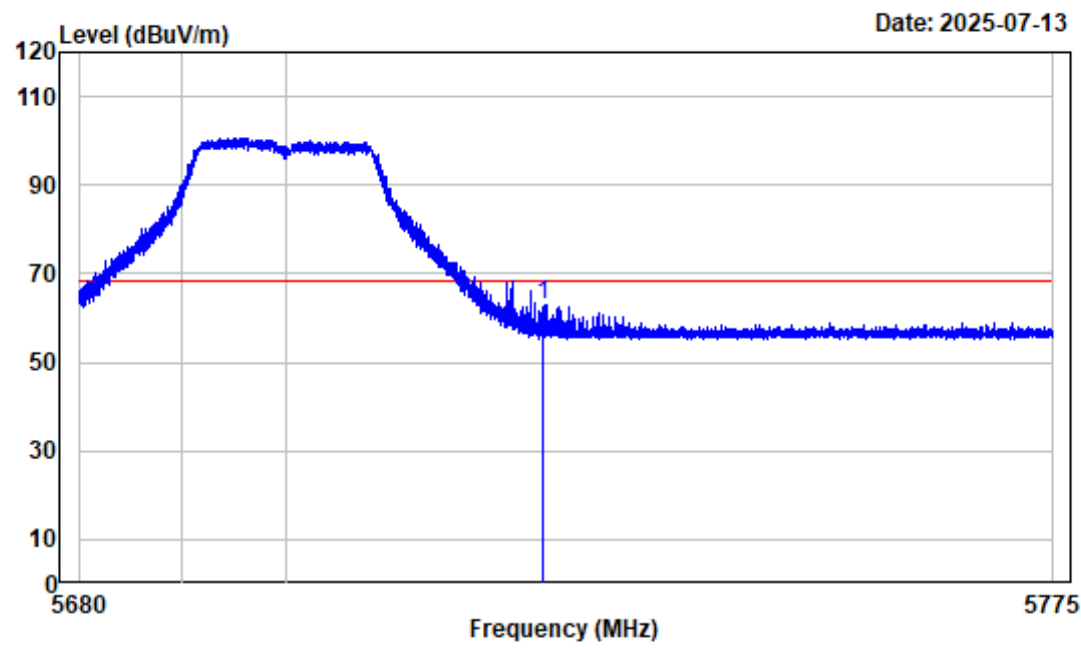

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-4.46	67.49	63.03	68.20	-5.17	peak


802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

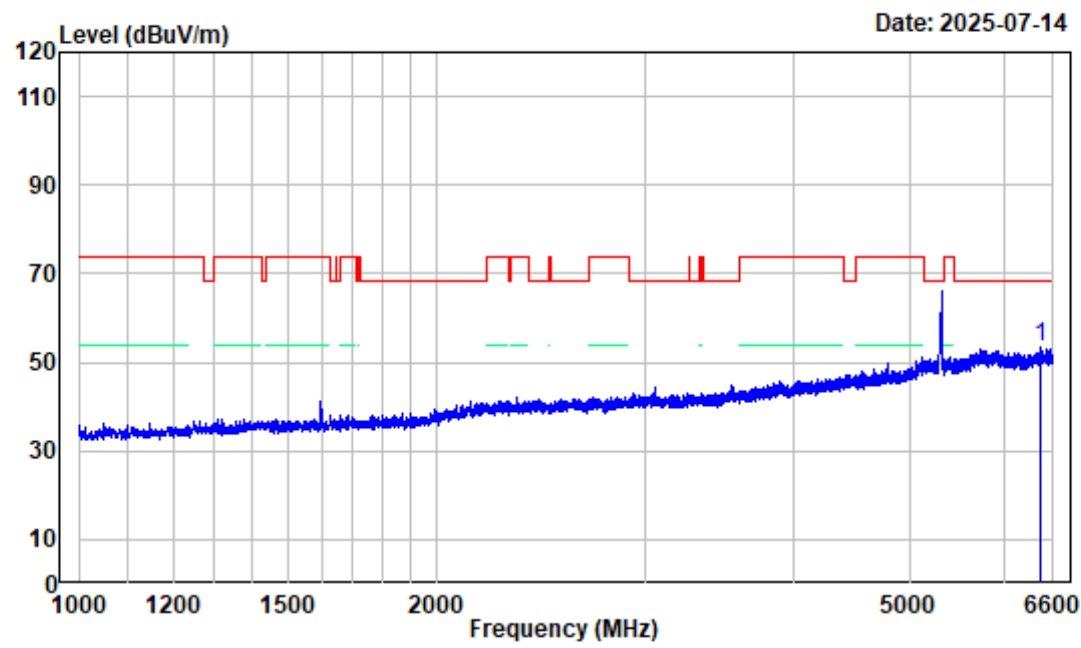

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5510MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6434.800	-3.63	56.88	53.25	68.20	-14.95 peak


802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

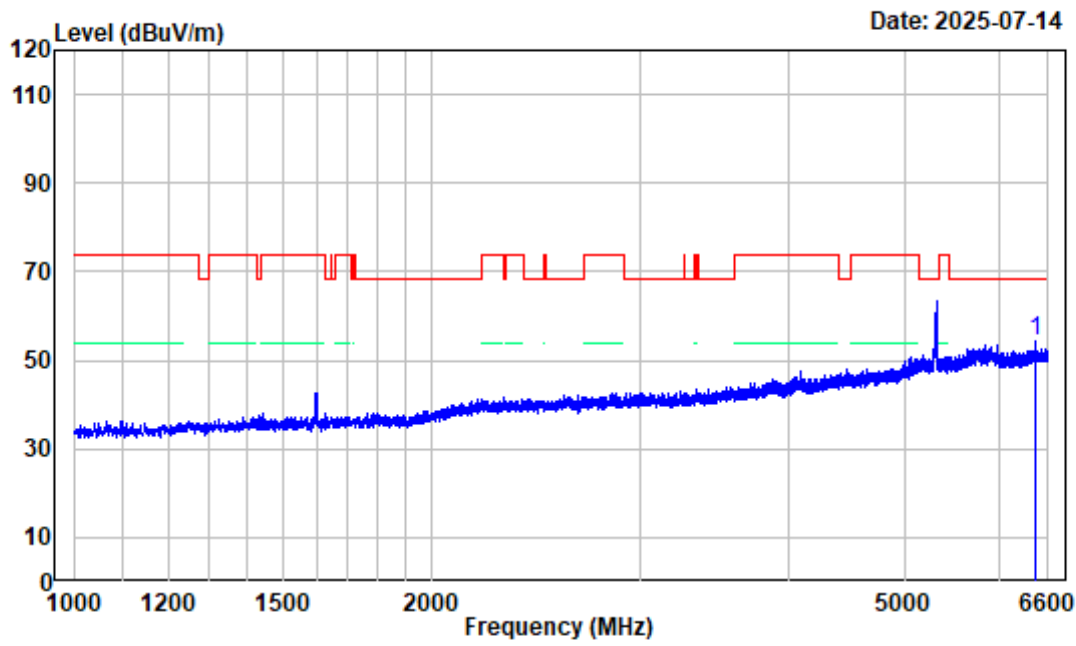

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5510MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6432.700	-3.63	57.97	54.34	68.20	-13.86 peak


802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

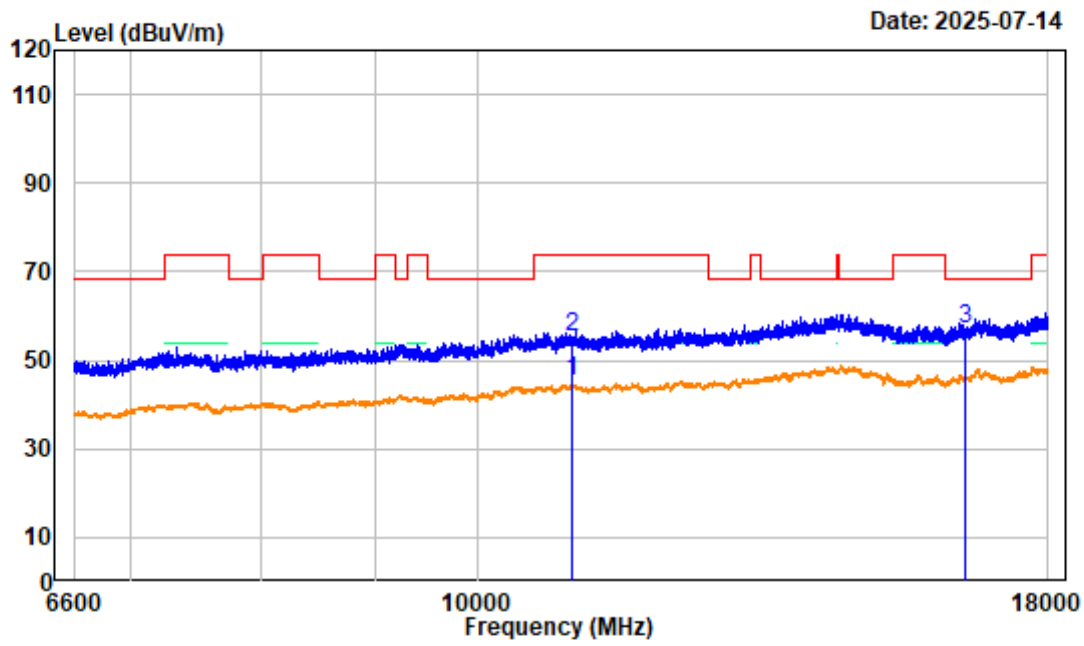

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5510MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11020.000	5.22	40.06	45.28	54.00	-8.72	average
2 11020.000	5.22	50.03	55.25	74.00	-18.75	peak
3 16530.000	6.09	51.19	57.28	68.20	-10.92	peak


802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

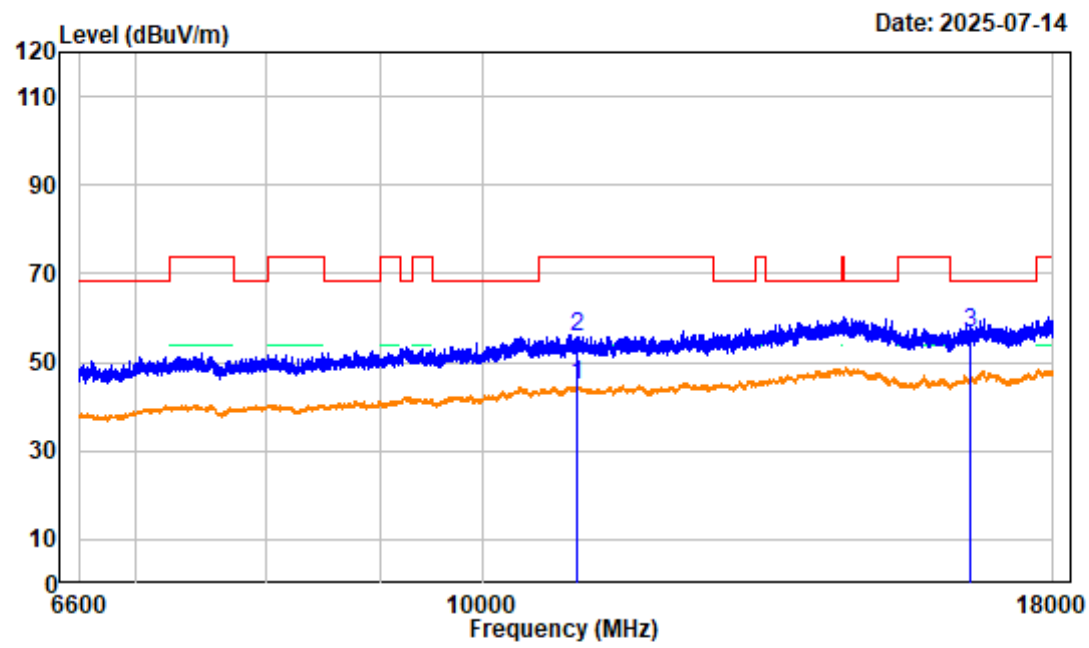

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5510MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11020.000	5.22	39.56	44.78	54.00	-9.22	average
2 11020.000	5.22	50.57	55.79	74.00	-18.21	peak
3 16530.000	6.09	50.64	56.73	68.20	-11.47	peak


802.11AC40 Low Channel Bandedge_HORIZONTAL

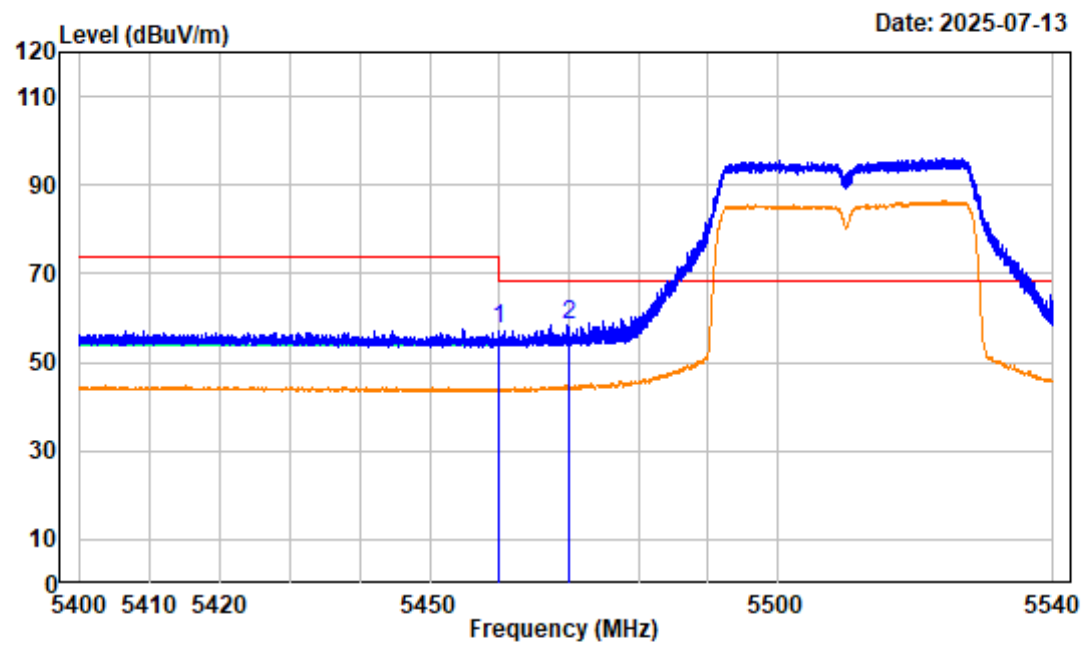

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5510MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	63.21	57.62	74.00	-16.38 peak
2	5470.000	-5.61	64.10	58.49	68.20	-9.71 peak


802.11AC40 Low Channel Bandedge_VERTICAL

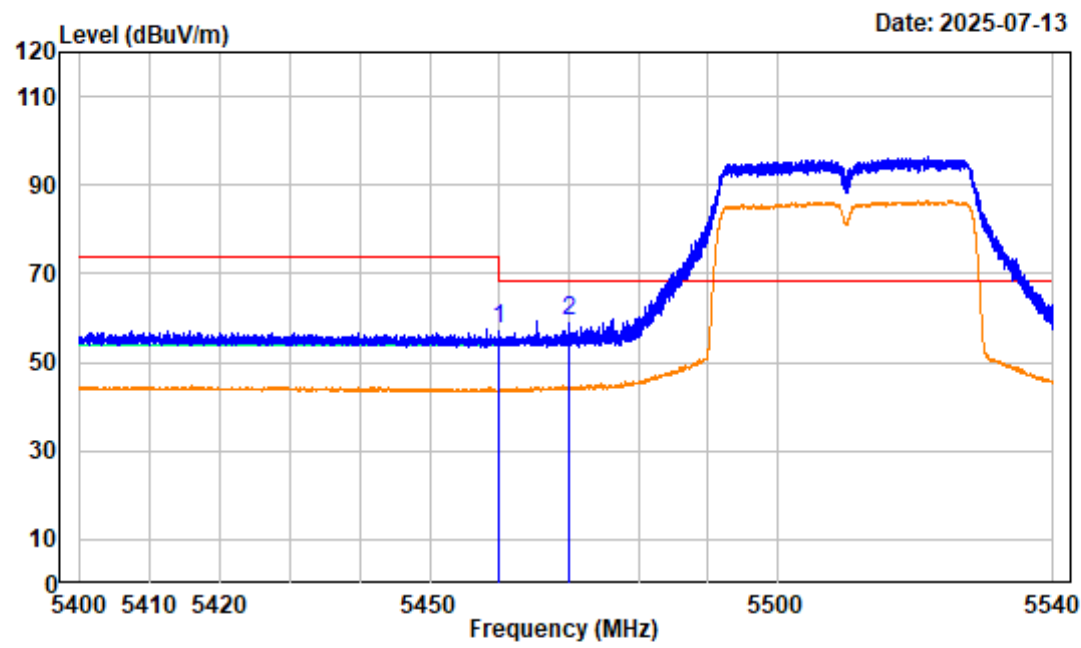

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5510MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-5.60	63.05	57.45	74.00	-16.55	peak
2 5470.000	-5.61	65.01	59.40	68.20	-8.80	peak


802.11AC40 Middle Channel 1GHz-6.6GHz_HORIZONTAL

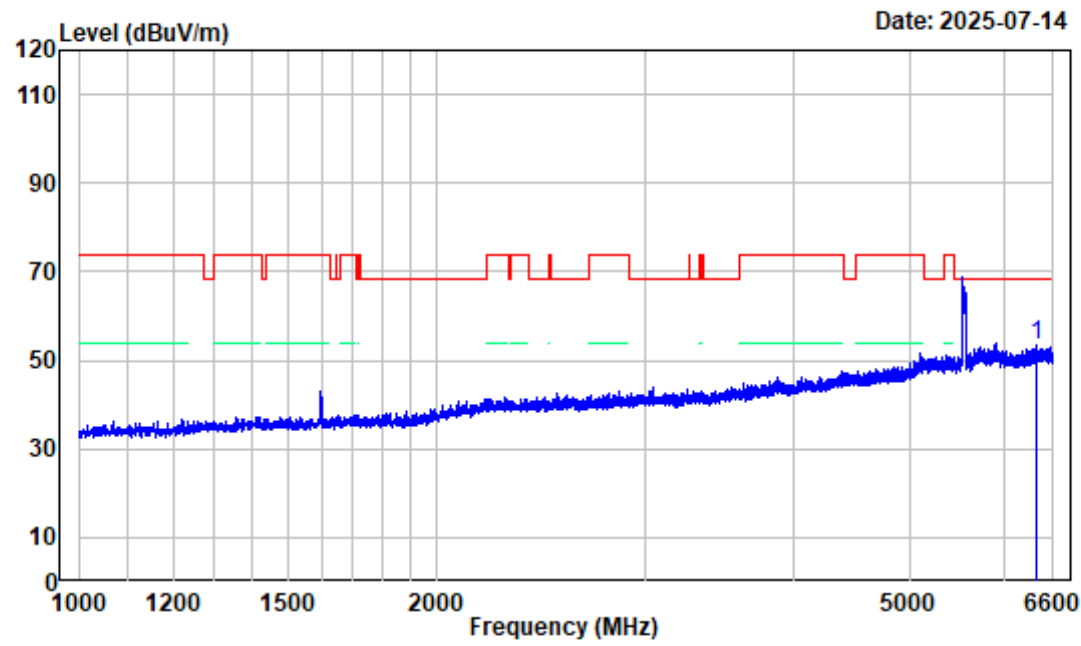

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Middle Channel 5550MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6389.300	-3.86	57.27	53.41	68.20	-14.79 peak


802.11AC40 Middle Channel 1GHz-6.6GHz_VERTICAL

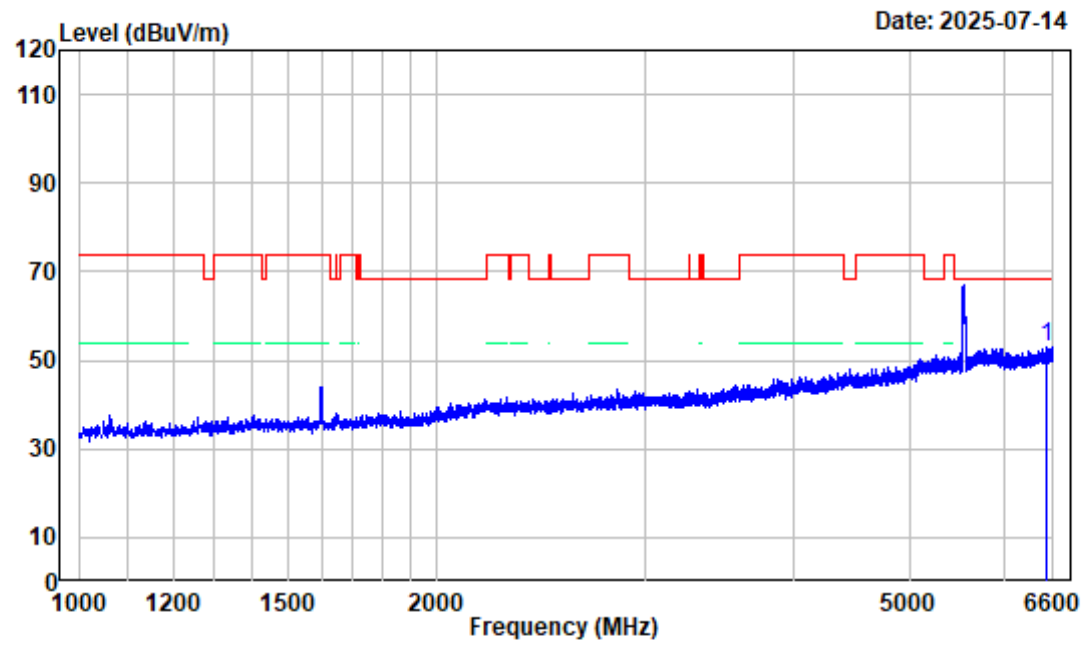

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Middle Channel 5550MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6508.300	-3.80	56.85	53.05	68.20	-15.15 peak


802.11AC40 Middle Channel 6.6GHz-18GHz_HORIZONTAL

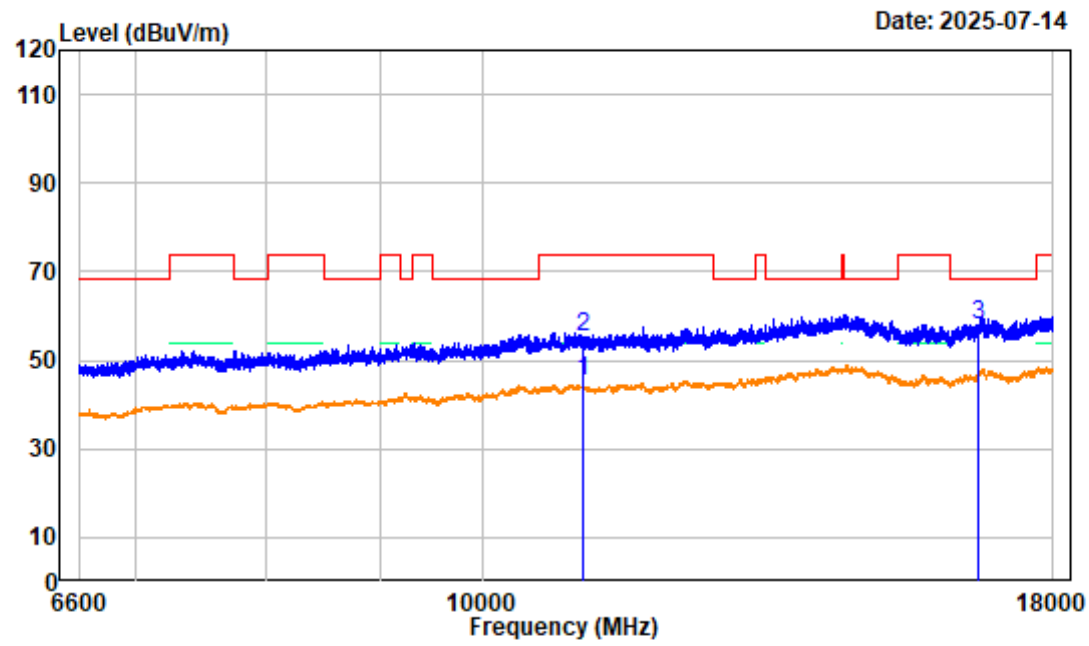

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Middle Channel 5550MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11100.000	4.76	40.49	45.25	54.00	-8.75	average
2 11100.000	4.76	50.46	55.22	74.00	-18.78	peak
3 16650.000	6.50	51.35	57.85	68.20	-10.35	peak

802.11AC40 Middle Channel 6.6GHz-18GHz_VERTICAL

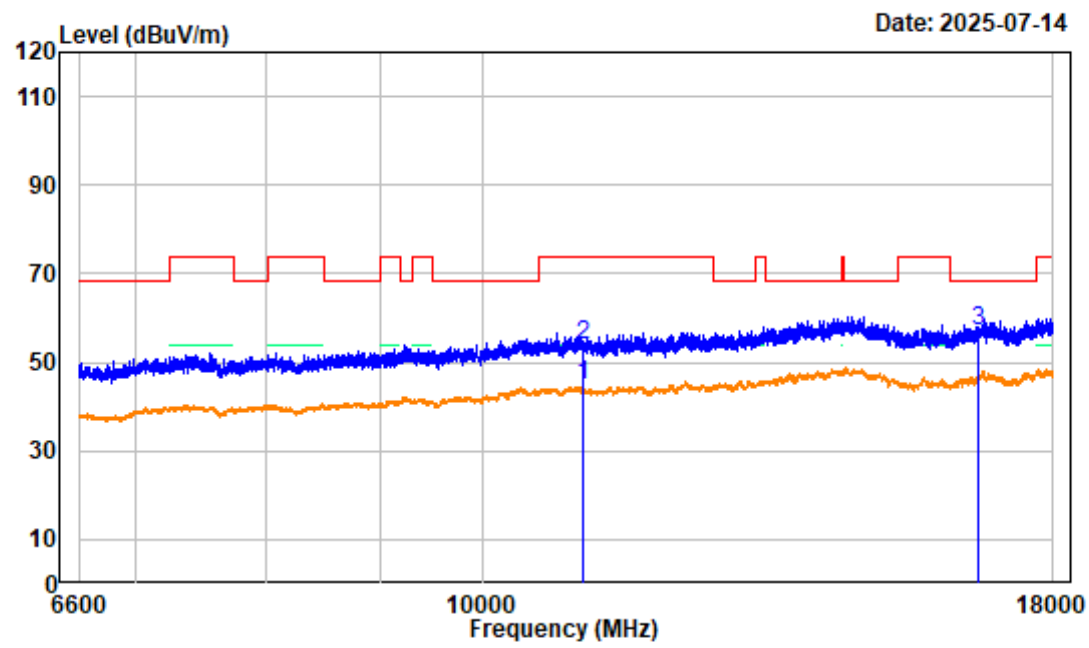

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC40 Middle Channel 5550MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11100.000	4.76	40.24	45.00	54.00	-9.00	average
2 11100.000	4.76	49.16	53.92	74.00	-20.08	peak
3 16650.000	6.50	50.73	57.23	68.20	-10.97	peak


802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

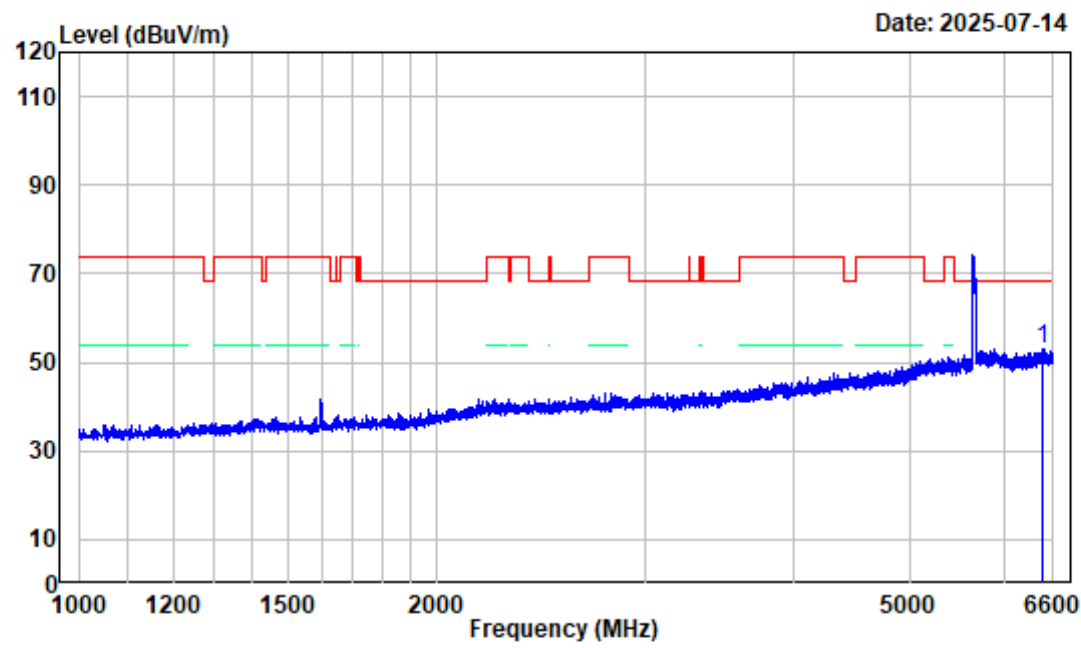

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5670MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6458.600	-3.64	56.73	53.09	68.20	-15.11	peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

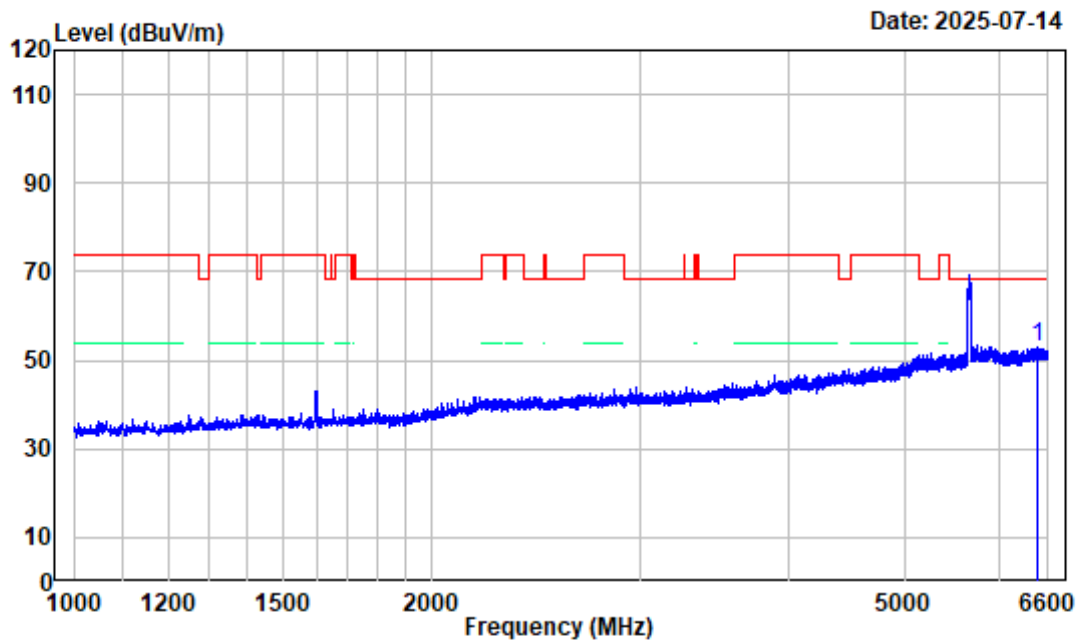

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5670MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6474.700	-3.72	56.63	52.91	68.20	-15.29	peak


802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

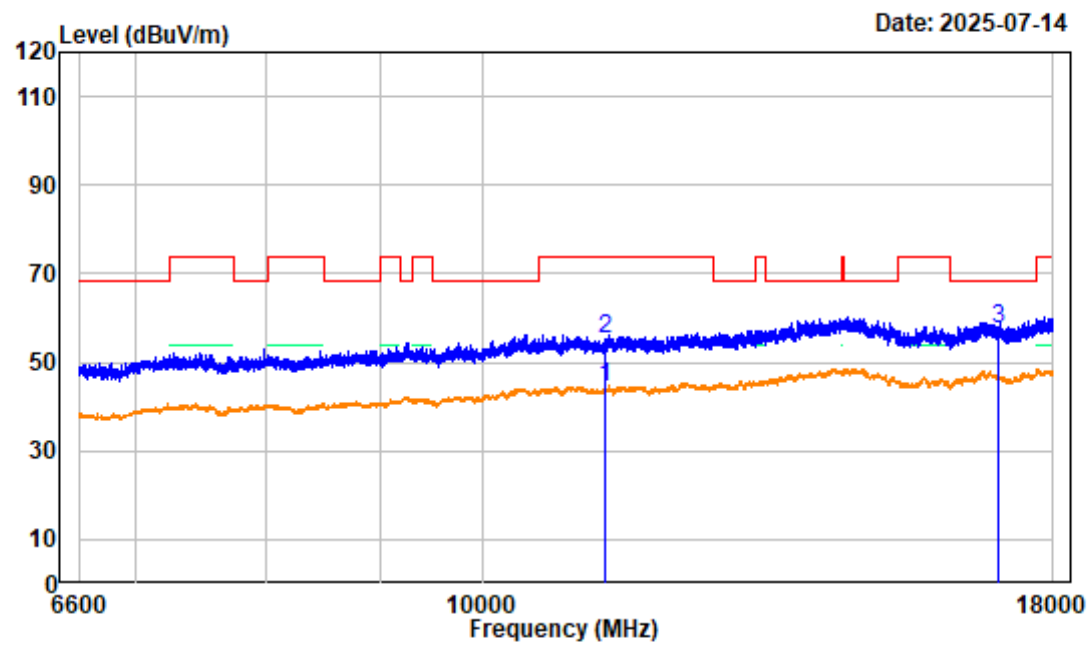

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5670MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	4.91	39.55	44.46	54.00	-9.54	average
2 11340.000	4.91	50.53	55.44	74.00	-18.56	peak
3 17010.000	7.57	49.77	57.34	68.20	-10.86	peak


802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

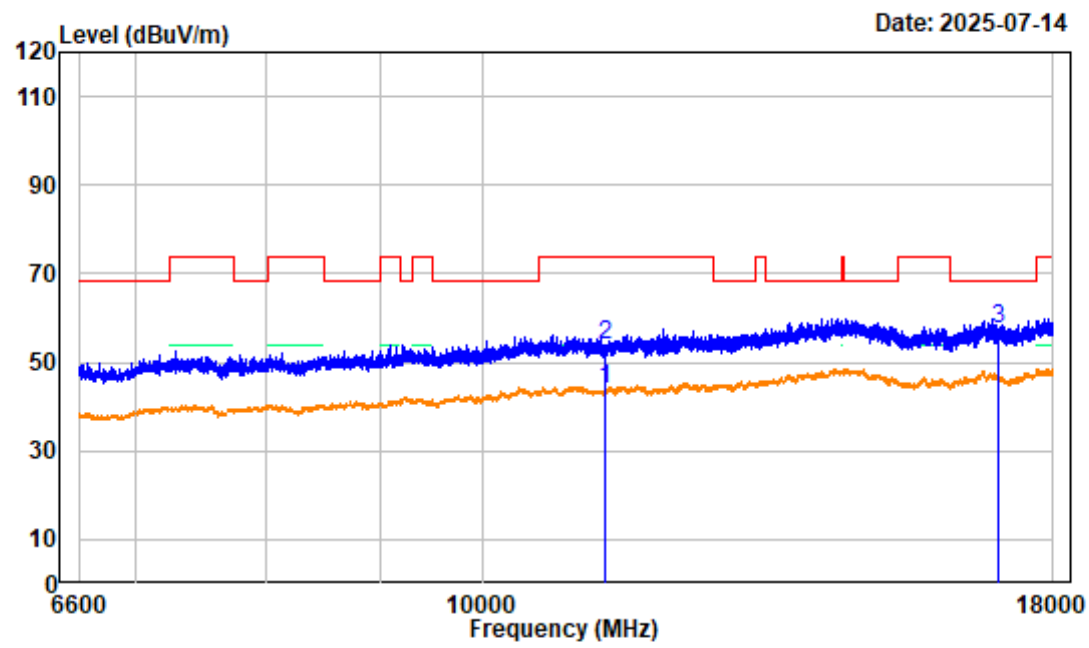

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5670MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	4.91	38.93	43.84	54.00	-10.16	average
2 11340.000	4.91	48.94	53.85	74.00	-20.15	peak
3 17010.000	7.57	49.75	57.32	68.20	-10.88	peak


802.11AC40 High Channel Bandedge_HORIZONTAL

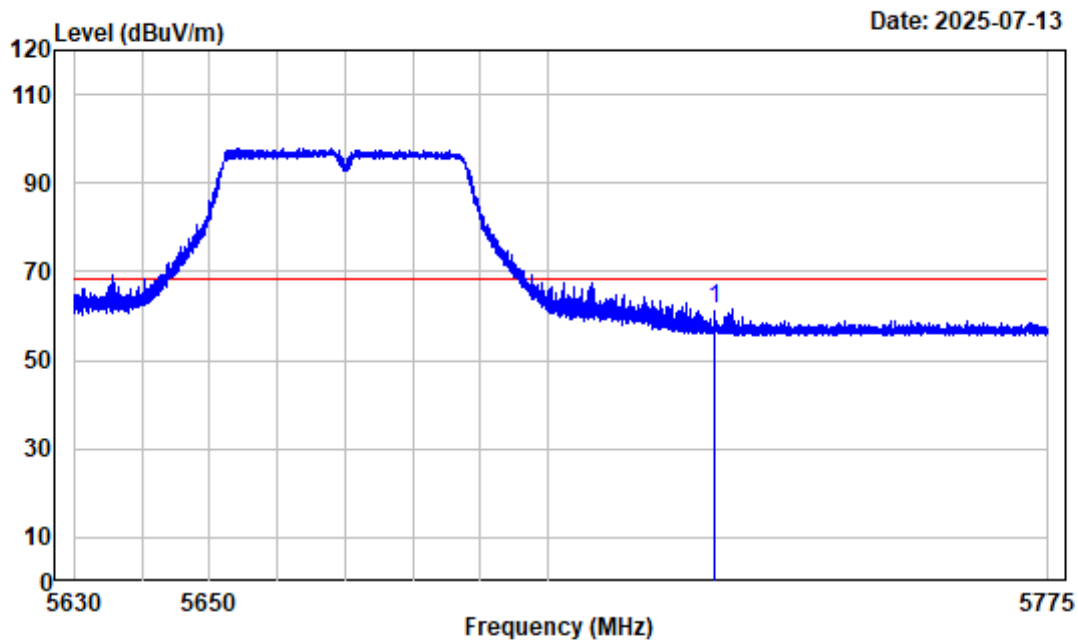

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5670MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	66.07	61.61	68.20	-6.59 peak


802.11AC40 High Channel Bandedge_VERTICAL

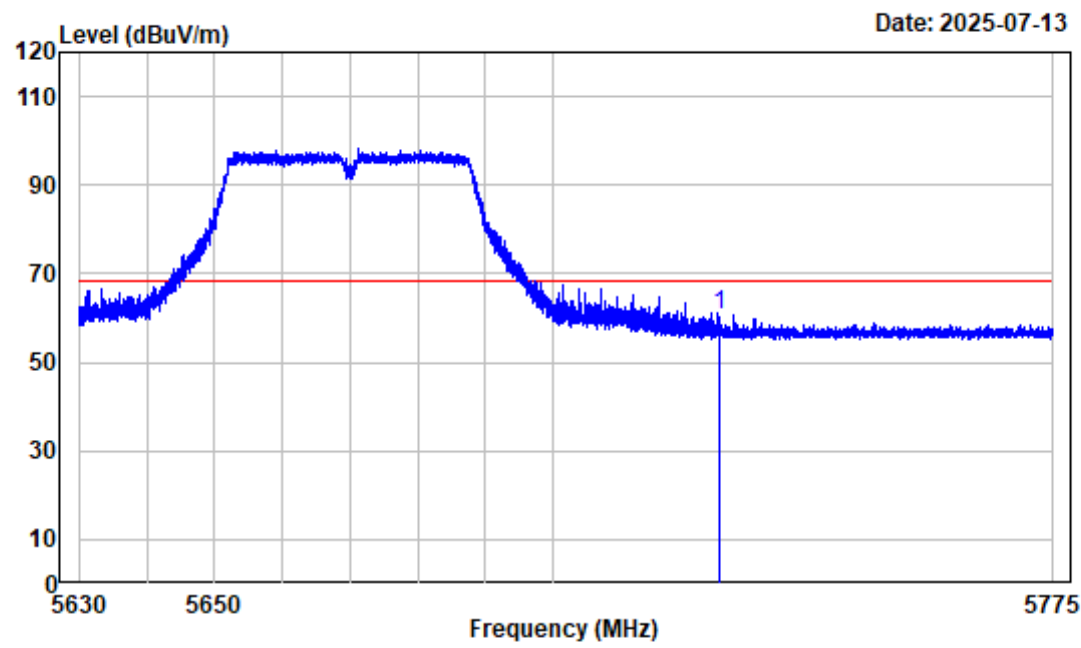

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5670MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	65.28	60.82	68.20	-7.38 peak


802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

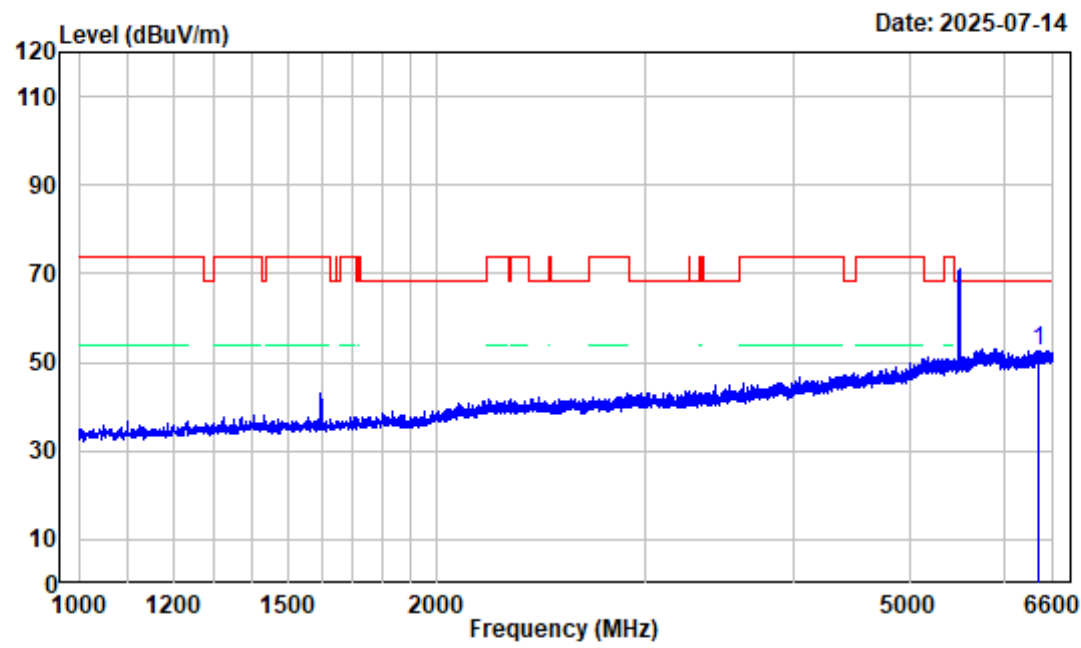

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6425.700	-3.64	56.29	52.65	68.20	-15.55 peak


802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

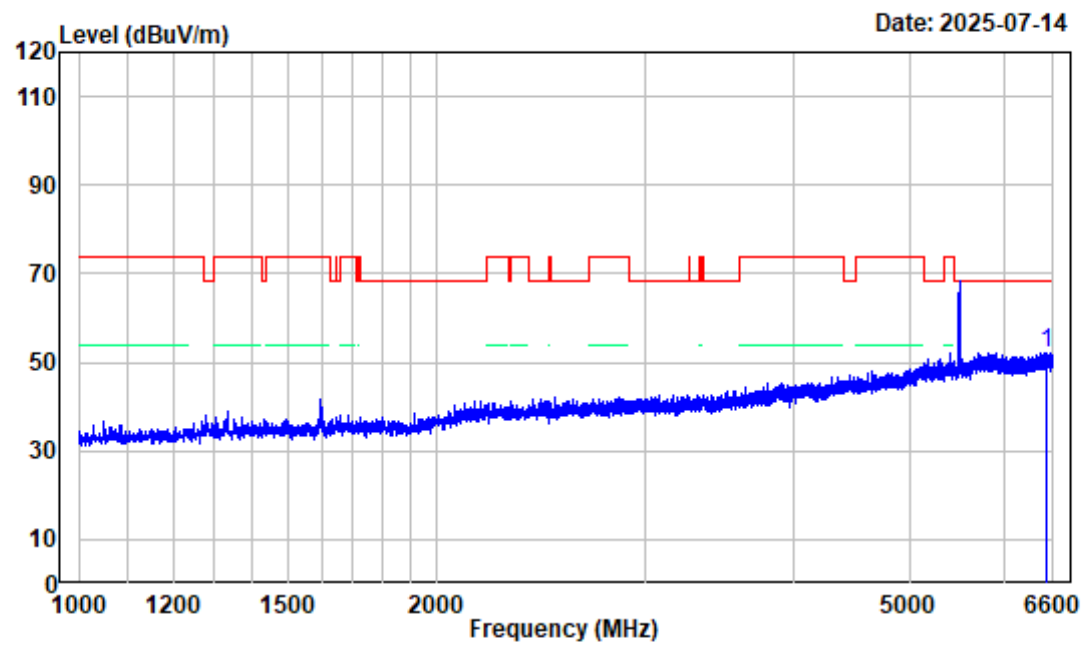

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5500MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6516.000	-3.79	56.02	52.23	68.20	-15.97 peak


802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

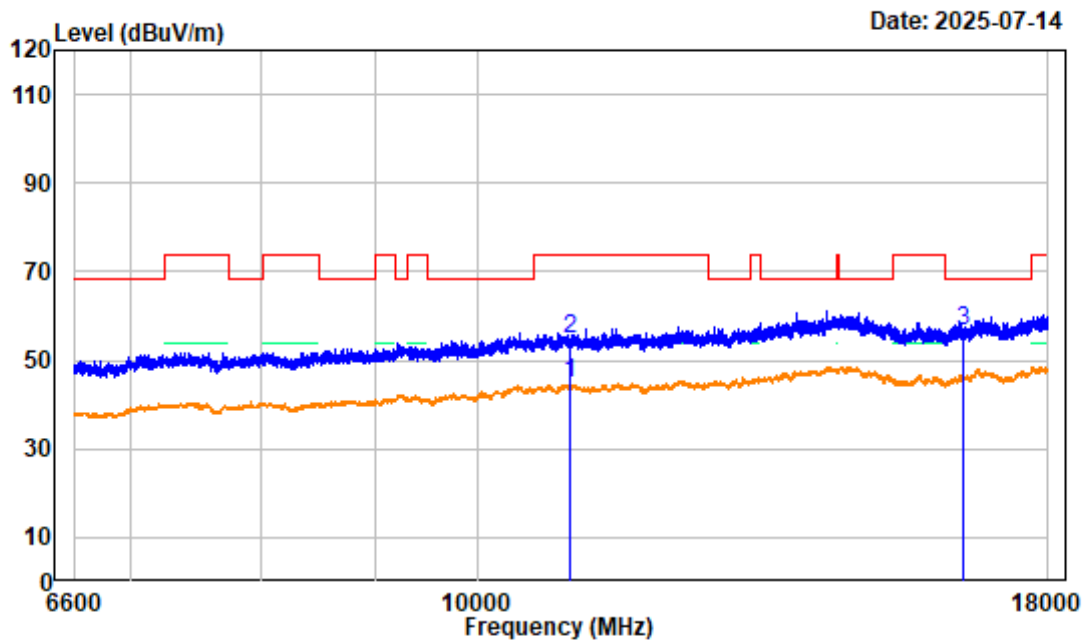

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.000	5.27	39.38	44.65	54.00	-9.35	average
2 11000.000	5.27	49.41	54.68	74.00	-19.32	peak
3 16500.000	5.92	50.52	56.44	68.20	-11.76	peak


802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

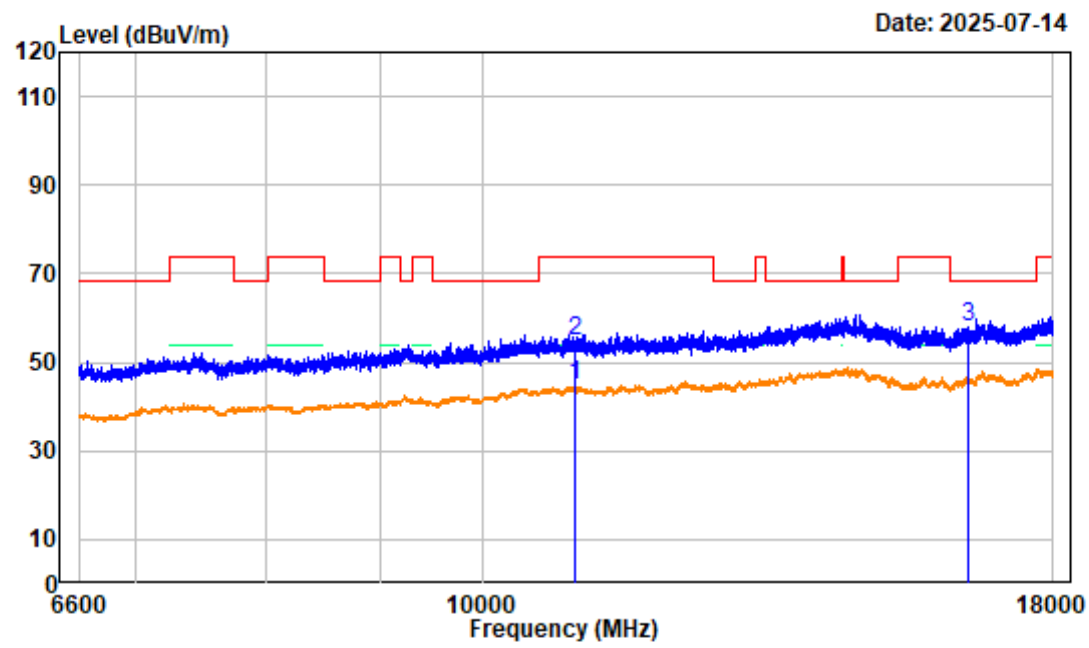

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5500MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11000.000	5.27	39.43	44.70	54.00	-9.30	average
2 11000.000	5.27	49.48	54.75	74.00	-19.25	peak
3 16500.000	5.92	52.19	58.11	68.20	-10.09	peak


802.11AX20 Low Channel Bandedge_HORIZONTAL

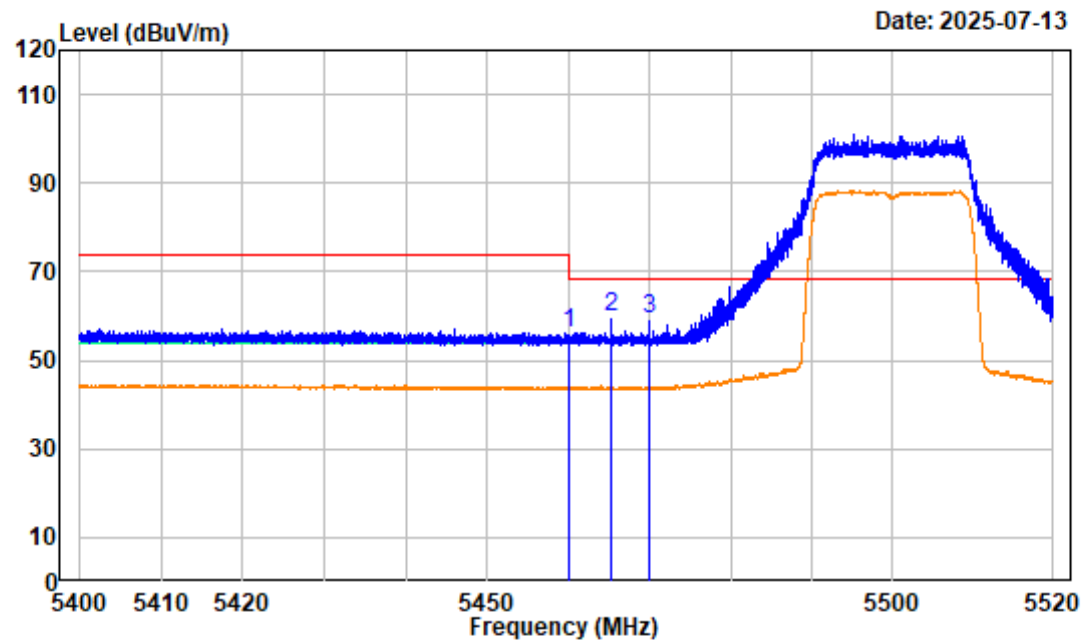

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	61.91	56.32	74.00	-17.68 peak
2	5465.250	-5.60	65.20	59.60	68.20	-8.60 Peak
3	5470.000	-5.61	64.87	59.26	68.20	-8.94 peak


802.11AX20 Low Channel Bandedge_VERTICAL

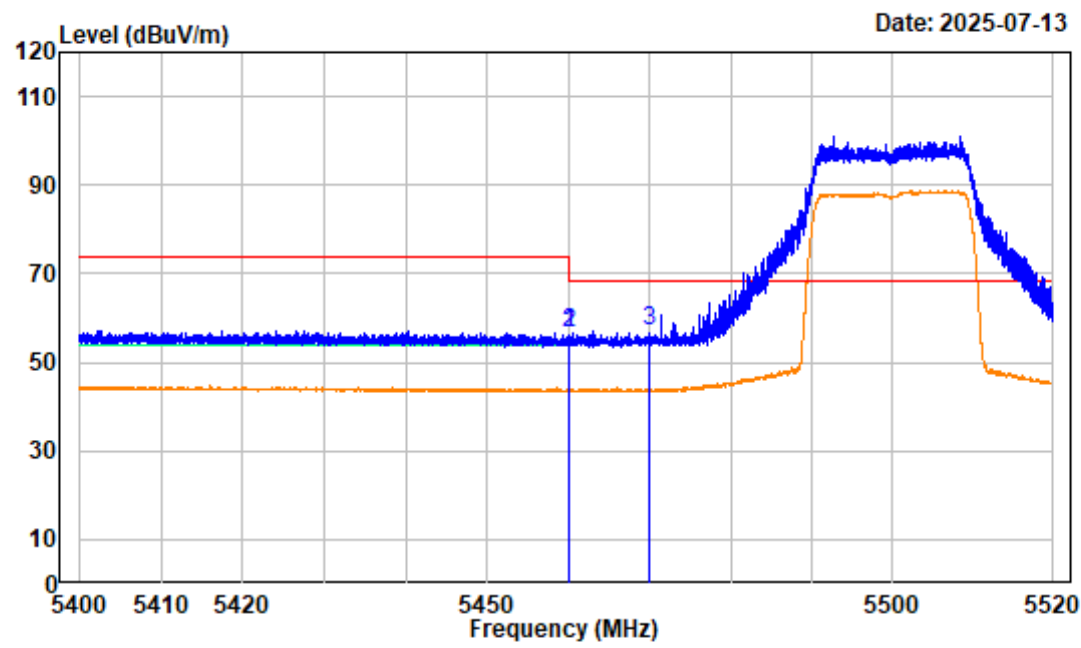

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-5.59	62.36	56.77	54.00	2.77	average
2 5460.000	-5.57	62.34	56.77	74.00	-17.23	peak
3 5470.000	-5.61	62.47	56.86	68.20	-11.34	peak


802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

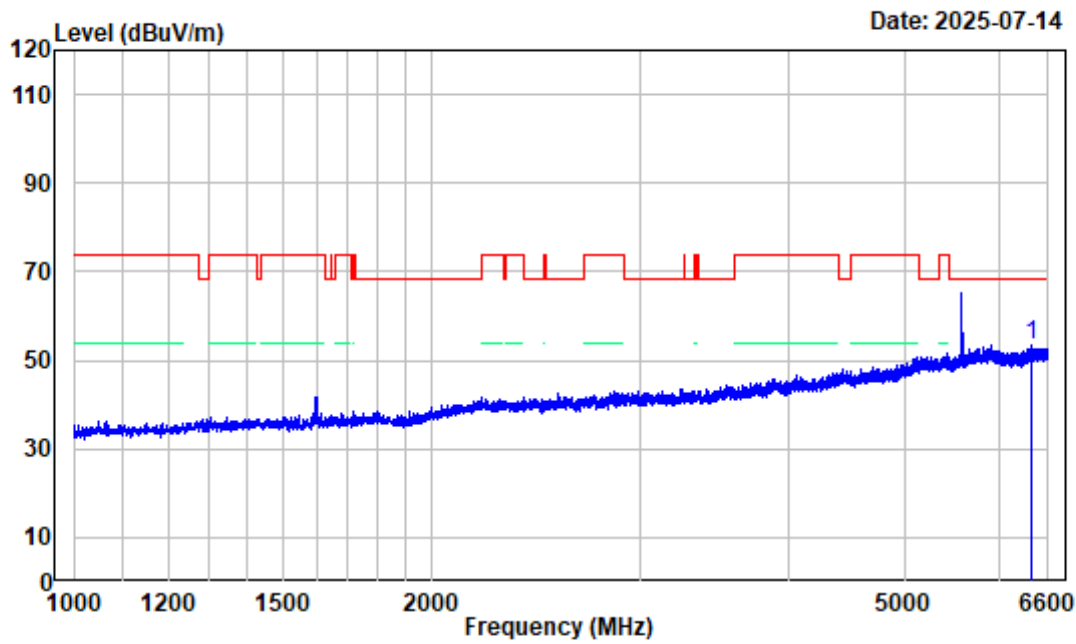

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6389.300	-3.86	57.10	53.24	68.20	-14.96 peak


802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

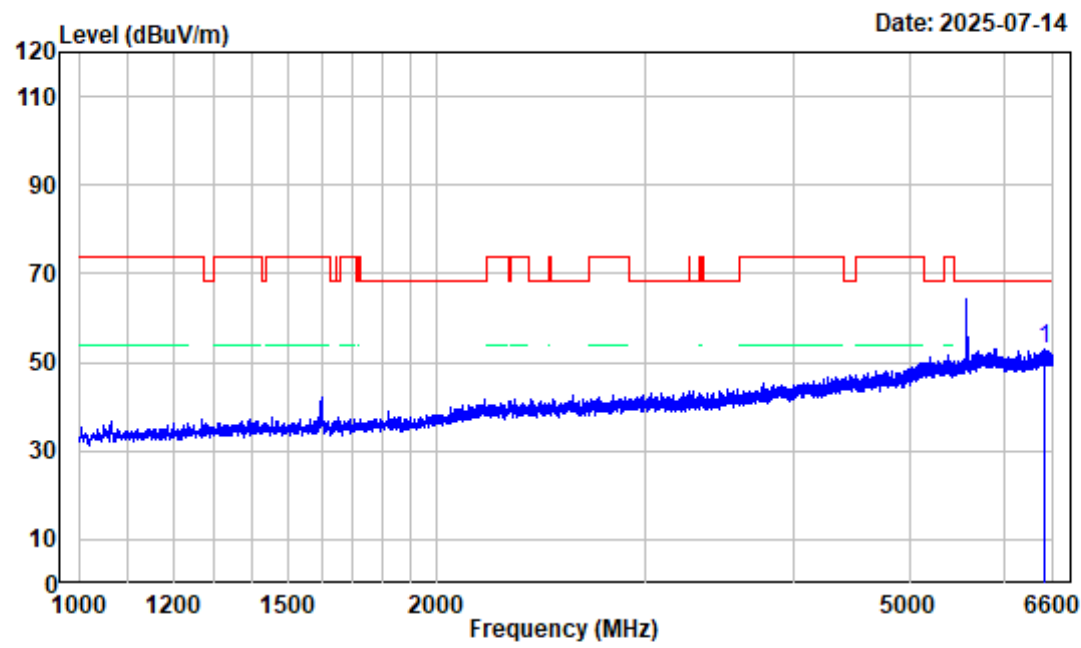

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5580MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6502.700	-3.81	56.77	52.96	68.20	-15.24 peak


802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

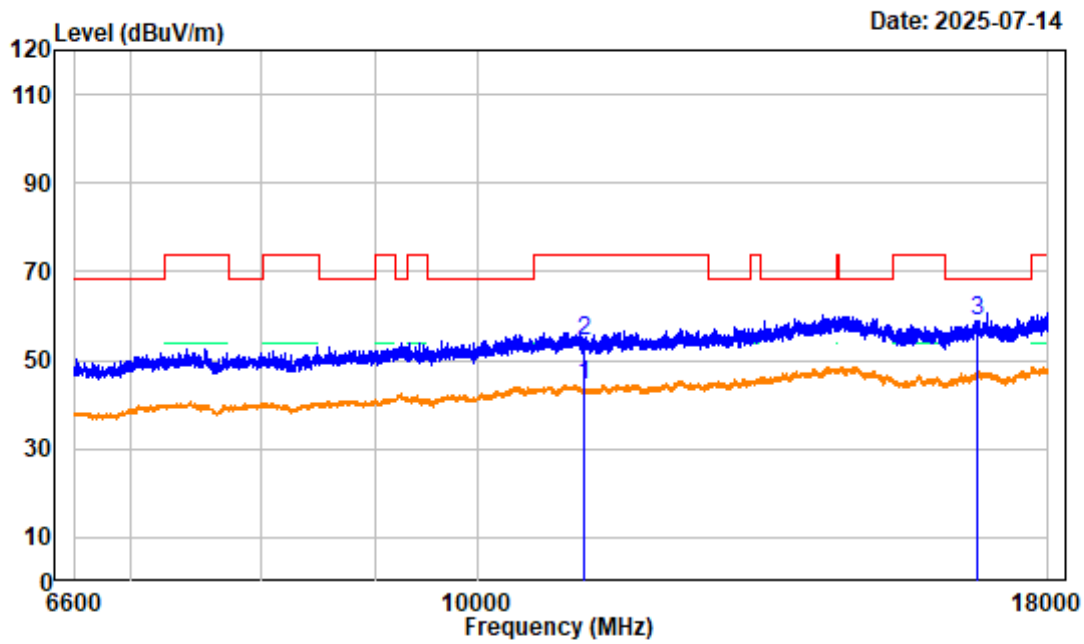

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	40.04	44.36	54.00	-9.64	average
2 11160.000	4.32	50.07	54.39	74.00	-19.61	peak
3 16740.000	7.63	51.20	58.83	68.20	-9.37	peak


802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

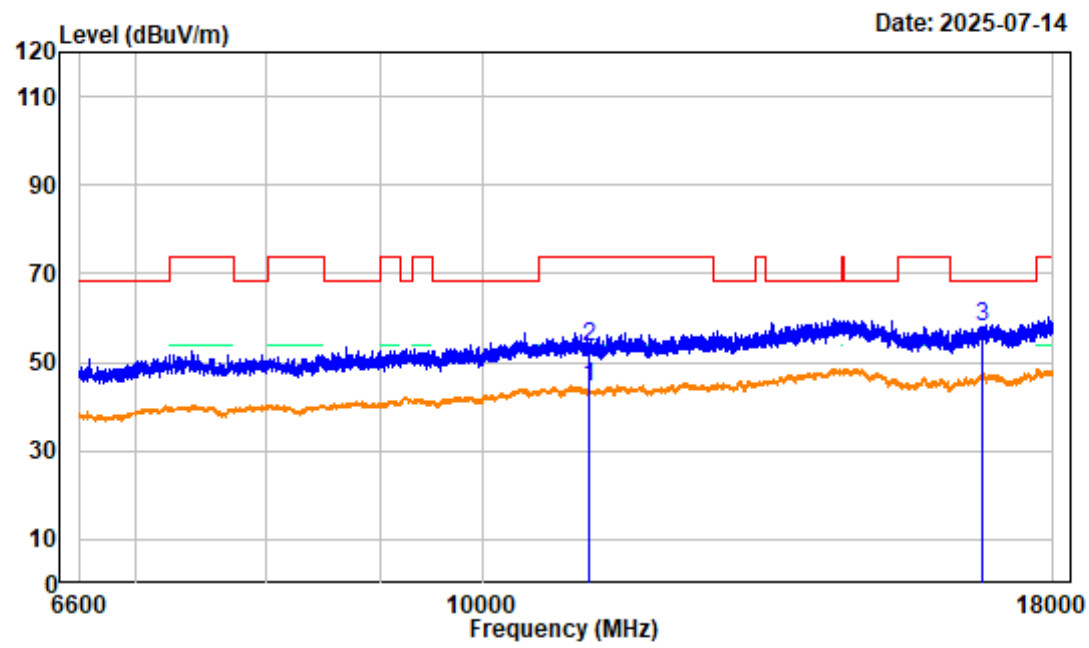

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5580MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11160.000	4.32	40.06	44.38	54.00	-9.62	average
2 11160.000	4.32	49.06	53.38	74.00	-20.62	peak
3 16740.000	7.63	50.36	57.99	68.20	-10.21	peak


802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

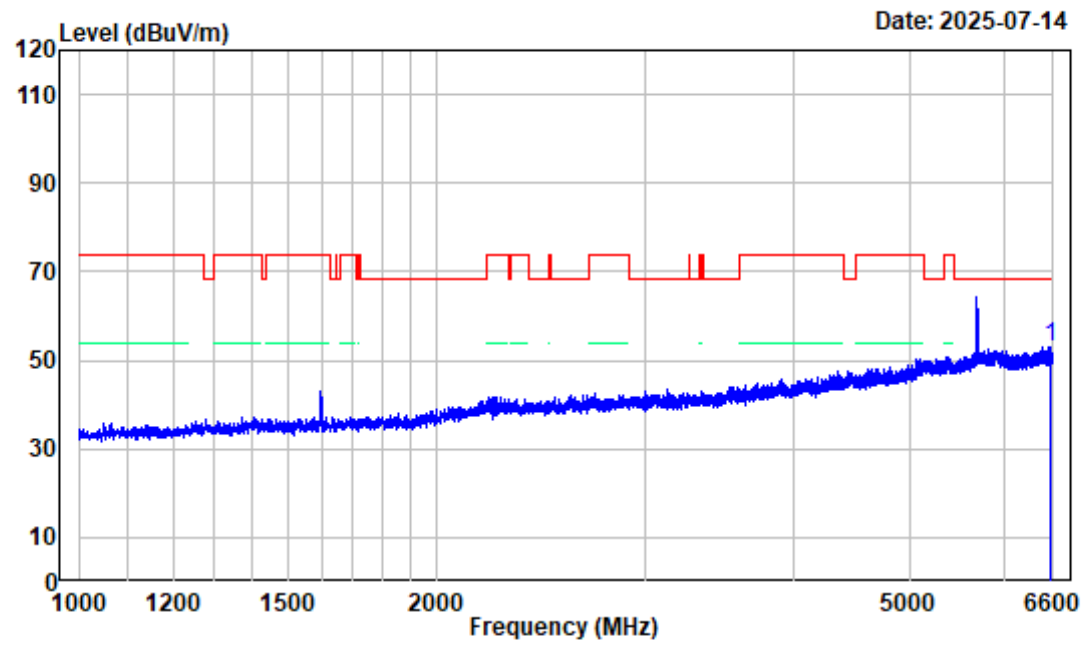

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6567.800	-3.65	56.63	52.98	68.20	-15.22 peak


802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

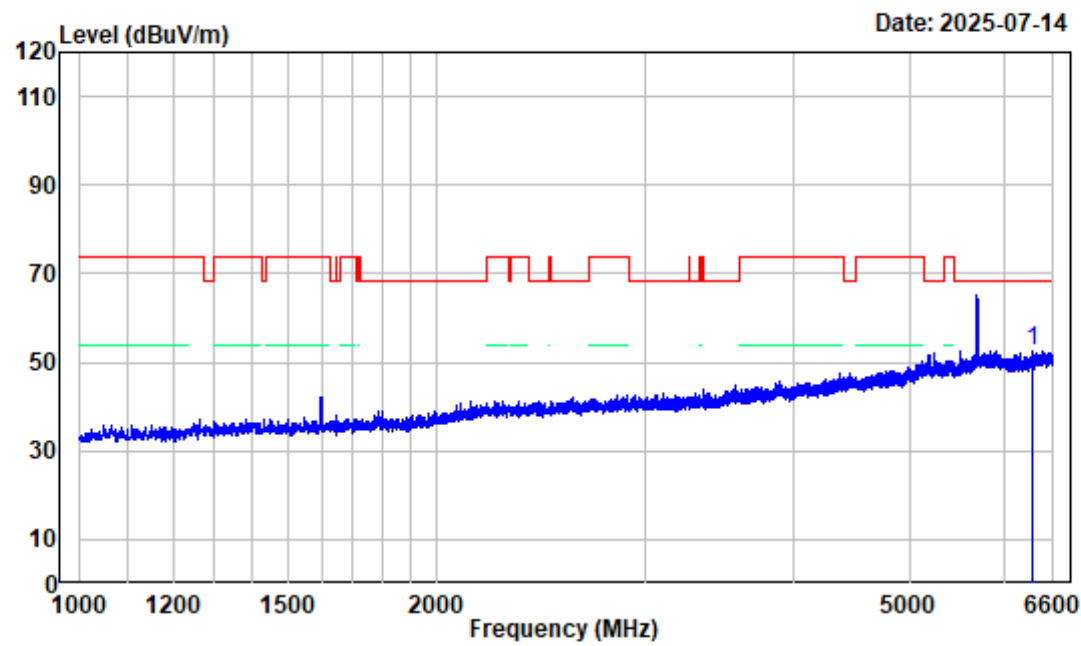

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5700MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6342.400	-4.51	57.17	52.66	68.20	-15.54 peak


802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

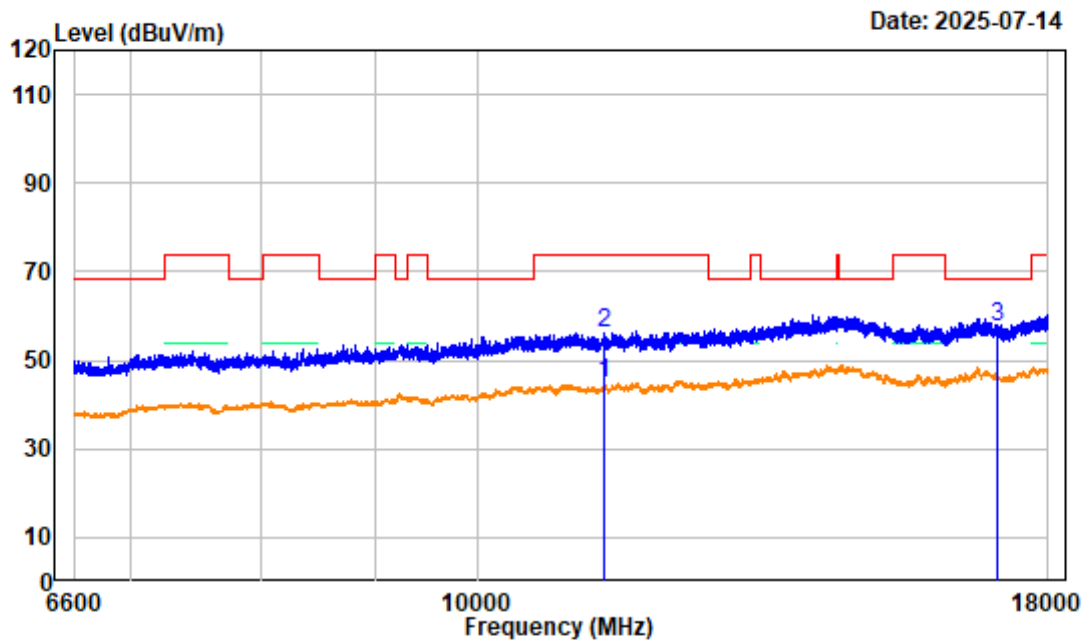

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	5.67	39.36	45.03	54.00	-8.97	average
2 11400.000	5.67	50.33	56.00	74.00	-18.00	peak
3 17100.000	6.92	50.59	57.51	68.20	-10.69	peak


802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

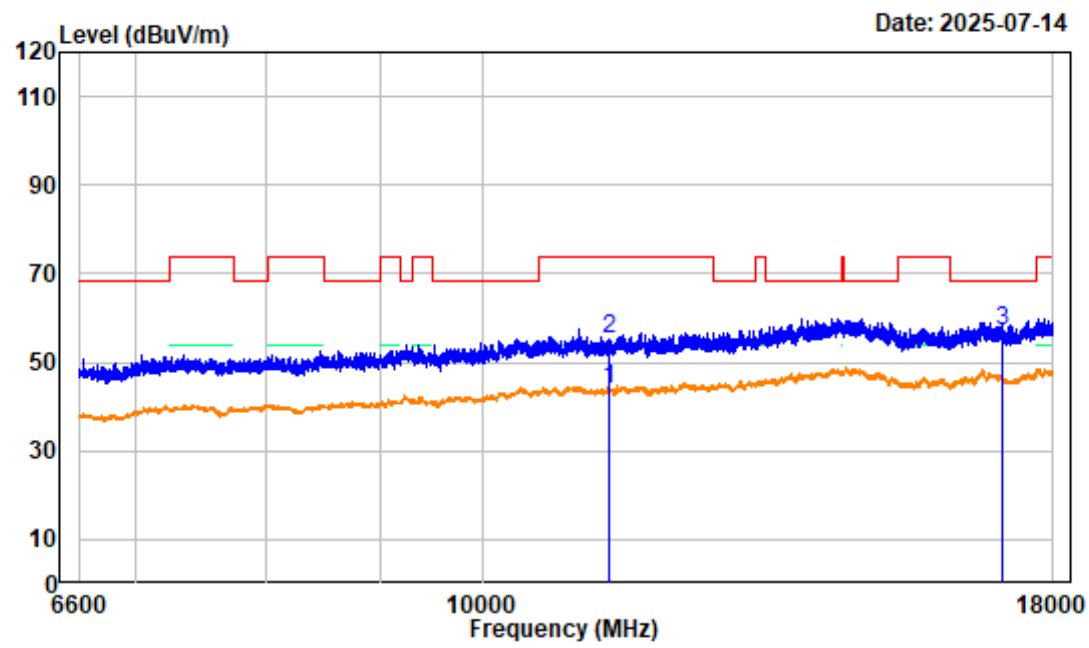

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5700MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.67	38.42	44.09	54.00	-9.91 average
2	11400.000	5.67	49.39	55.06	74.00	-18.94 peak
3	17100.000	6.92	50.03	56.95	68.20	-11.25 peak


802.11AX20 High Channel Bandedge_HORIZONTAL

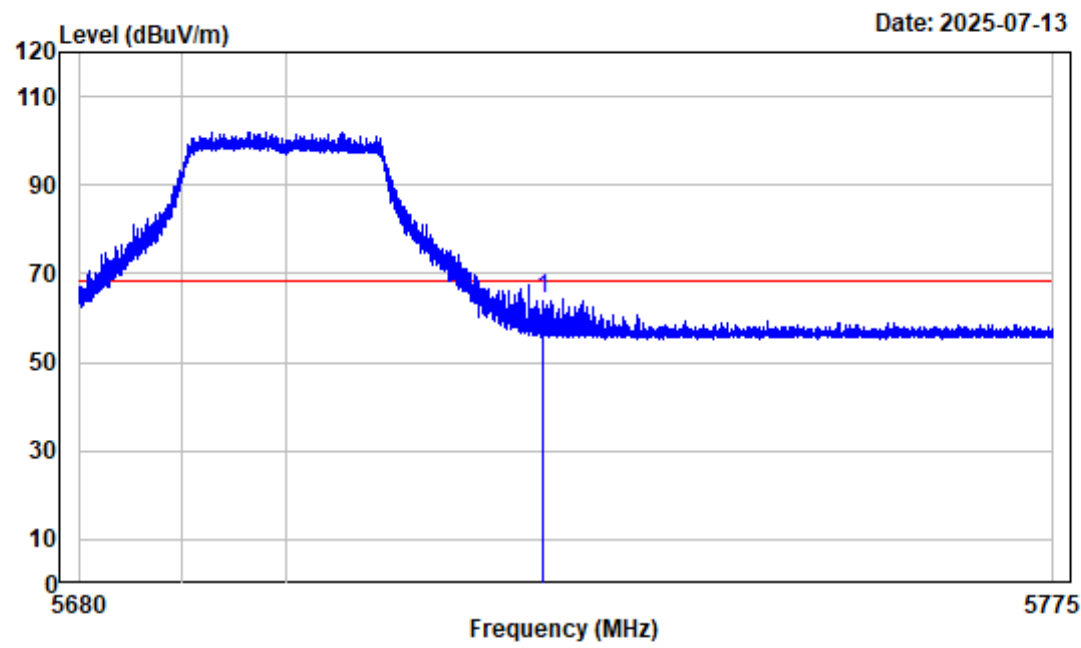

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-4.46	68.57	64.11	68.20	-4.09	peak


802.11AX20 High Channel Bandedge_VERTICAL

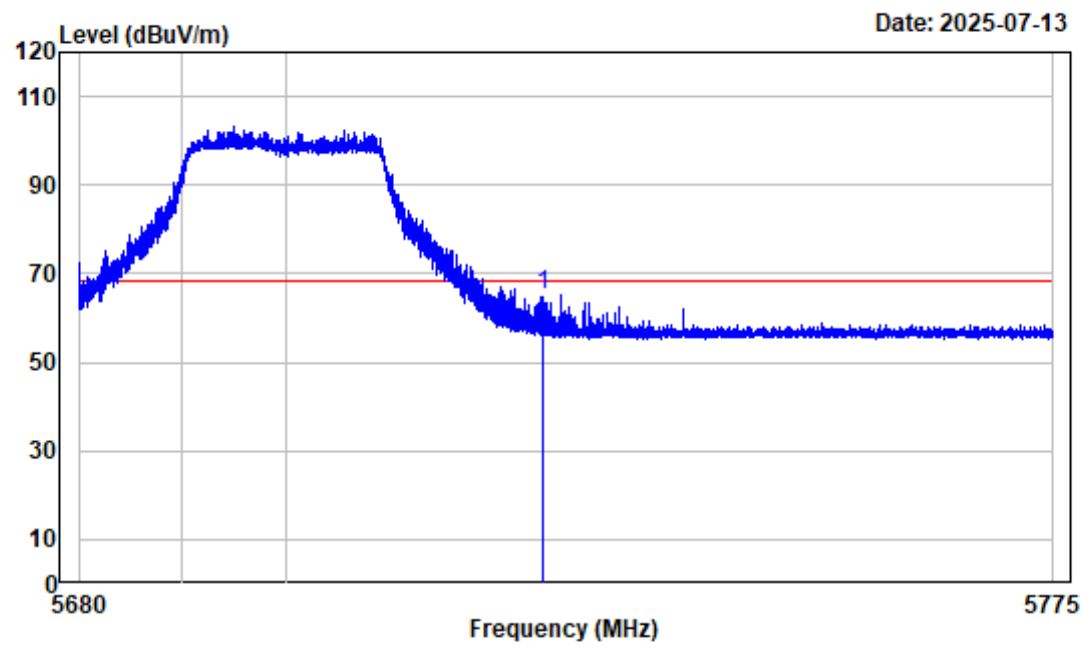

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5700MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-4.46	69.52	65.06	68.20	-3.14	peak


802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

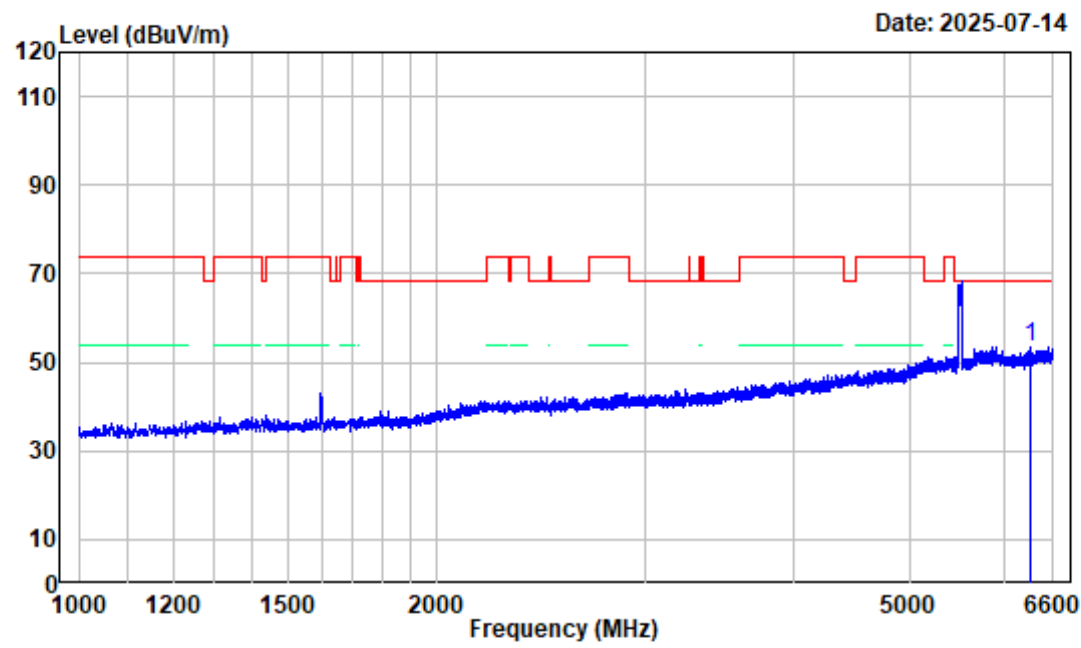

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5510MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6312.300	-4.43	57.66	53.23	68.20	-14.97 peak


802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

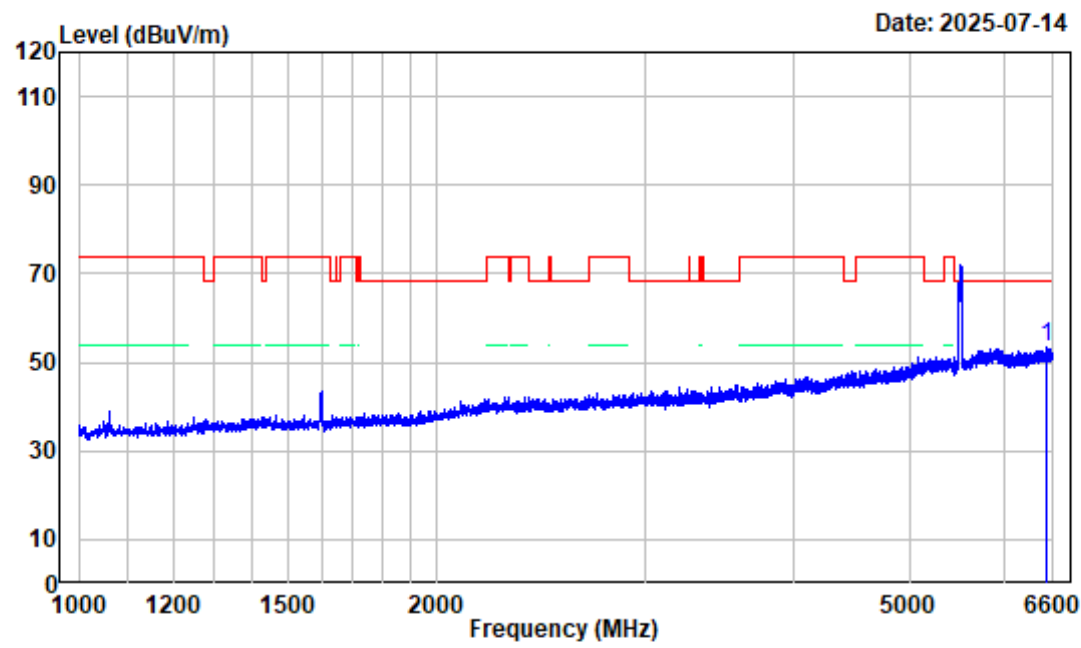

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5510MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6515.300	-3.79	57.06	53.27	68.20	-14.93	peak

802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

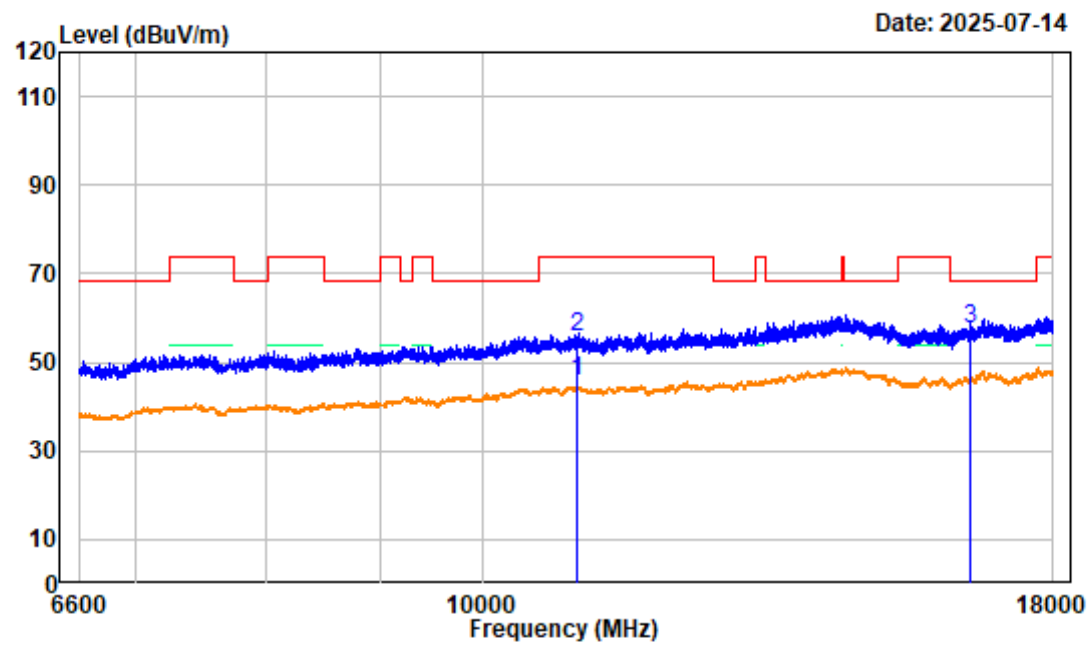

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX40 Low Channel 5510MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11020.000	5.22	40.49	45.71	54.00	-8.29	average
2 11020.000	5.22	50.53	55.75	74.00	-18.25	peak
3 16530.000	6.09	51.47	57.56	68.20	-10.64	peak


802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

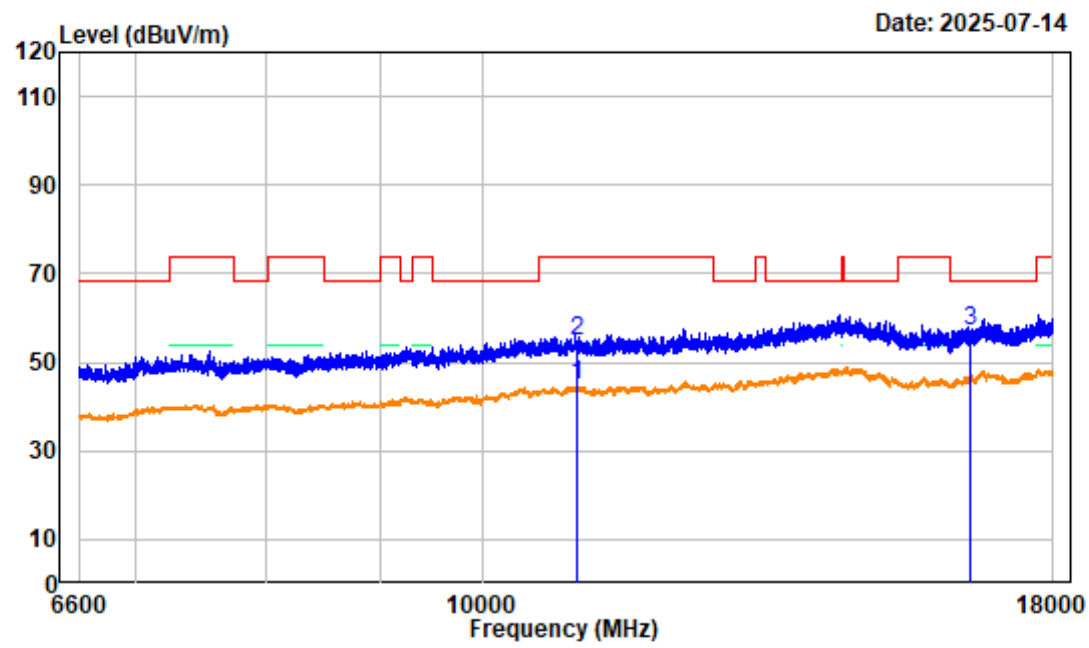

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5510MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11020.000	5.22	39.51	44.73	54.00	-9.27	average
2 11020.000	5.22	49.53	54.75	74.00	-19.25	peak
3 16530.000	6.09	51.16	57.25	68.20	-10.95	peak


802.11AX40 Low Channel Bandedge_HORIZONTAL

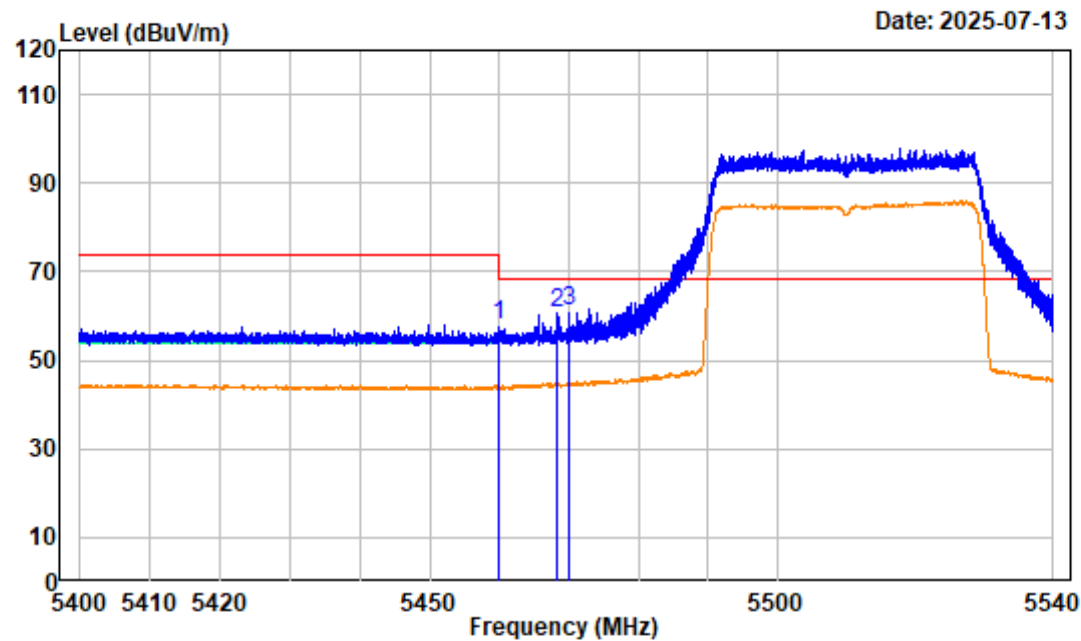

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5510MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-5.57	63.45	57.88	74.00	-16.12	peak
2 5468.268	-5.61	66.18	60.57	68.20	-7.63	Peak
3 5470.000	-5.61	66.68	61.07	68.20	-7.13	peak


802.11AX40 Low Channel Bandedge_VERTICAL

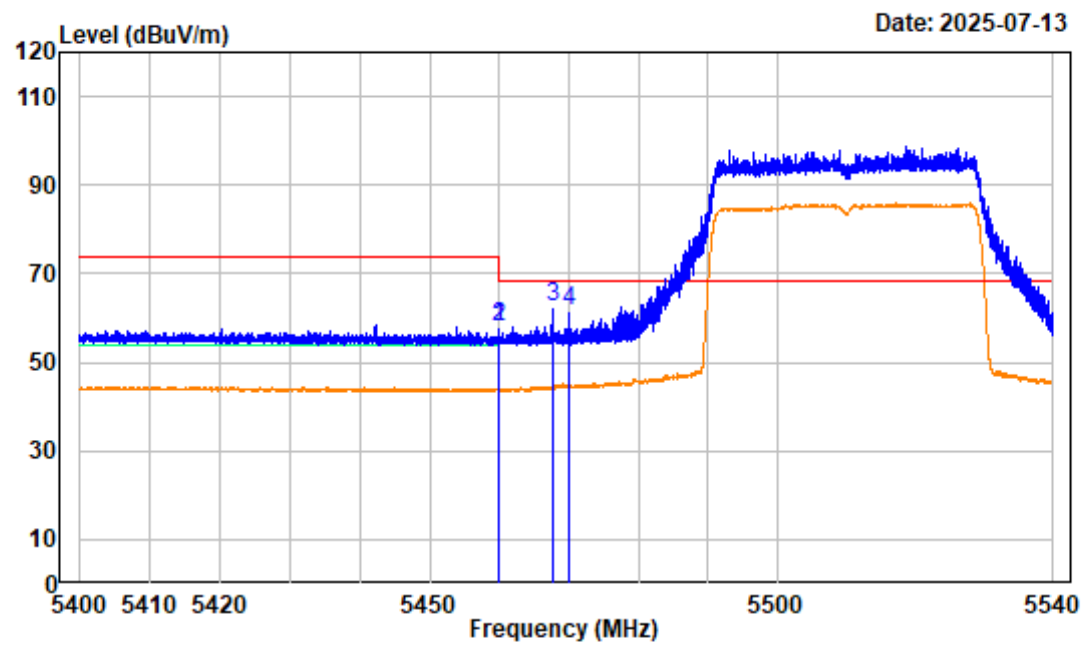

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5510MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.59	63.59	58.00	54.00	4.00	average
2	5460.000	-5.59	63.59	58.00	74.00	-16.00	peak
3	5467.550	-5.61	67.91	62.30	68.20	-5.90	Peak
4	5470.000	-5.61	67.35	61.74	68.20	-6.46	peak


802.11AX40 Middle Channel 1GHz-6.6GHz_HORIZONTAL

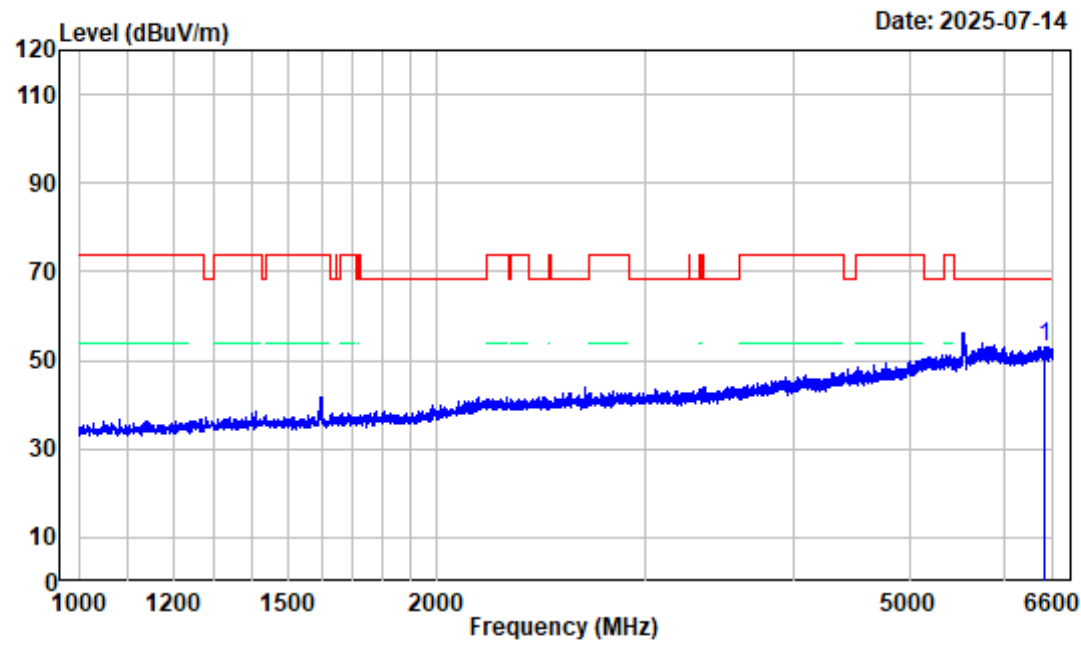

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Middle Channel 5550MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6490.100	-3.78	56.99	53.21	68.20	-14.99 peak


802.11AX40 Middle Channel 1GHz-6.6GHz_VERTICAL

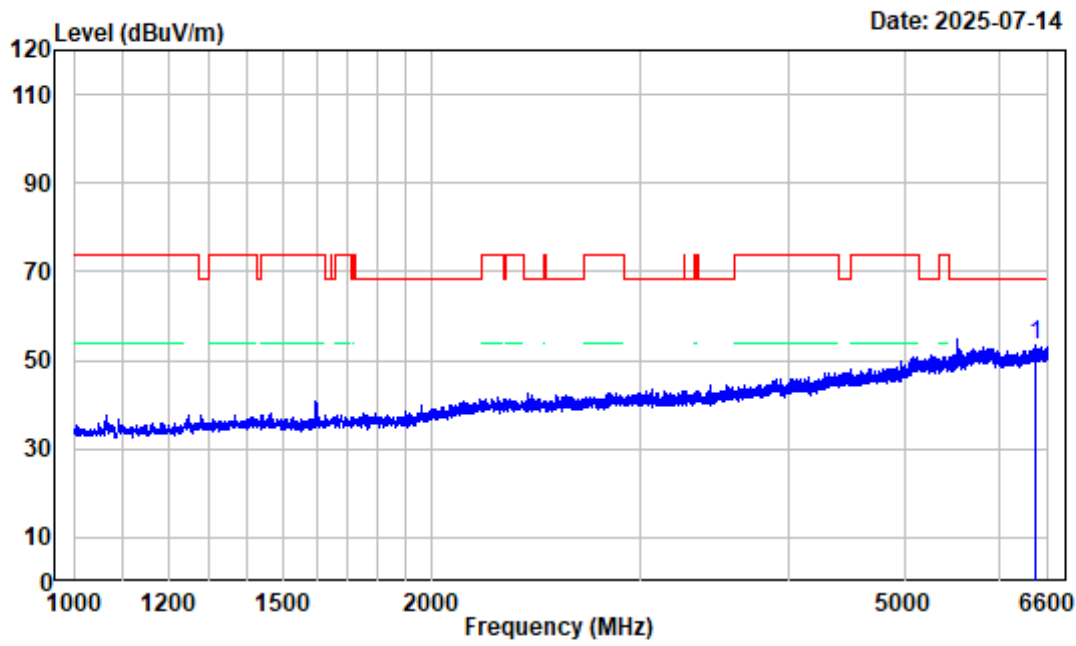

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Middle Channel 5550MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6436.900	-3.63	57.07	53.44	68.20	-14.76 peak


802.11AX40 Middle Channel 6.6GHz-18GHz_HORIZONTAL

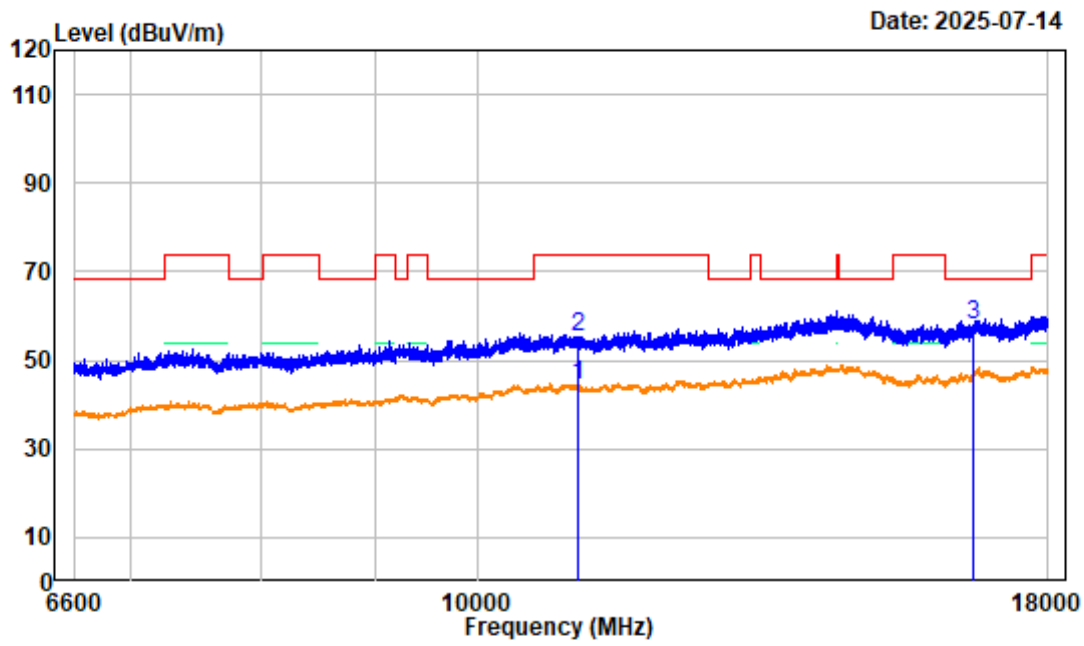

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Middle Channel 5550MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11100.000	4.76	39.67	44.43	54.00	-9.57	average
2 11100.000	4.76	50.65	55.41	74.00	-18.59	peak
3 16650.000	6.50	51.44	57.94	68.20	-10.26	peak


802.11AX40 Middle Channel 6.6GHz-18GHz_VERTICAL

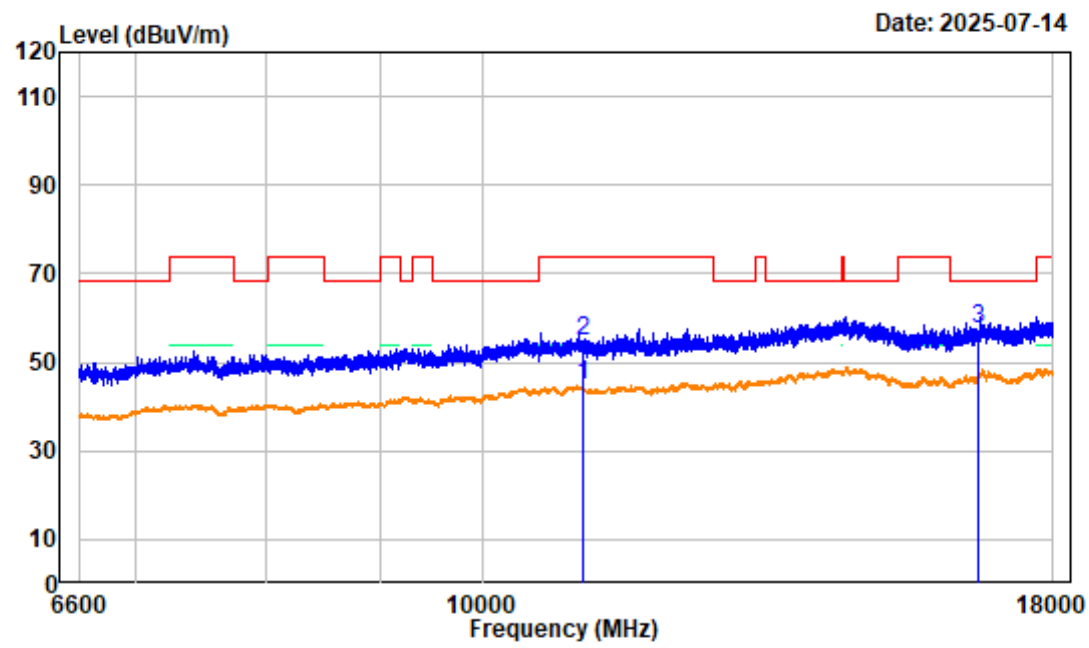

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Middle Channel 5550MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11100.000	4.76	39.99	44.75	54.00	-9.25	average
2 11100.000	4.76	49.99	54.75	74.00	-19.25	peak
3 16650.000	6.50	51.01	57.51	68.20	-10.69	peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

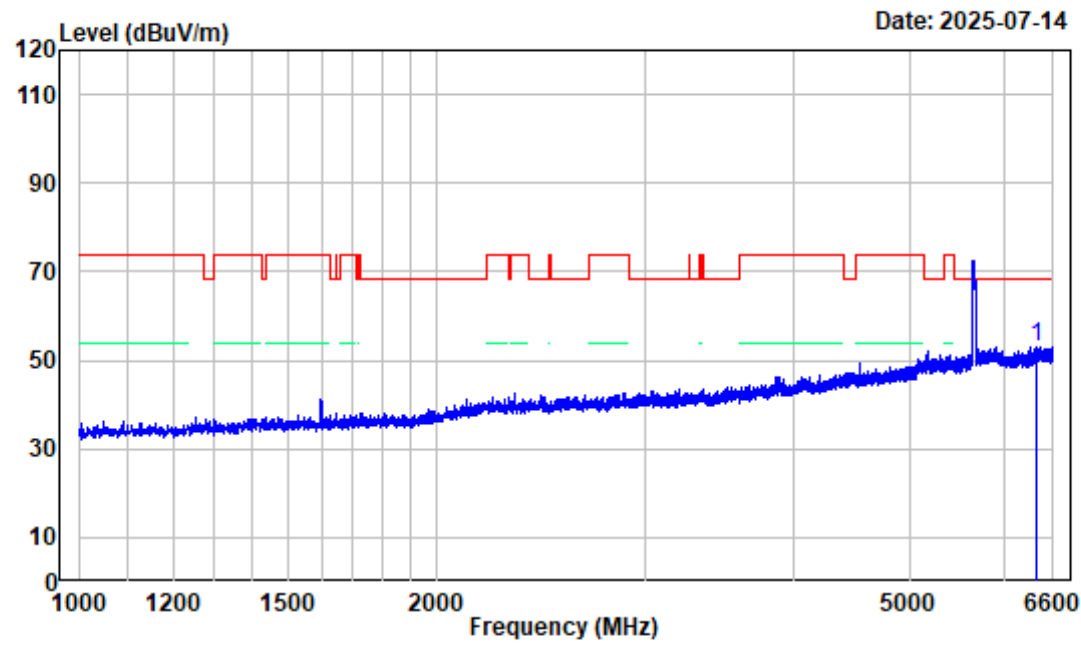

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5670MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6384.400	-3.94	57.11	53.17	68.20	-15.03 peak


802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

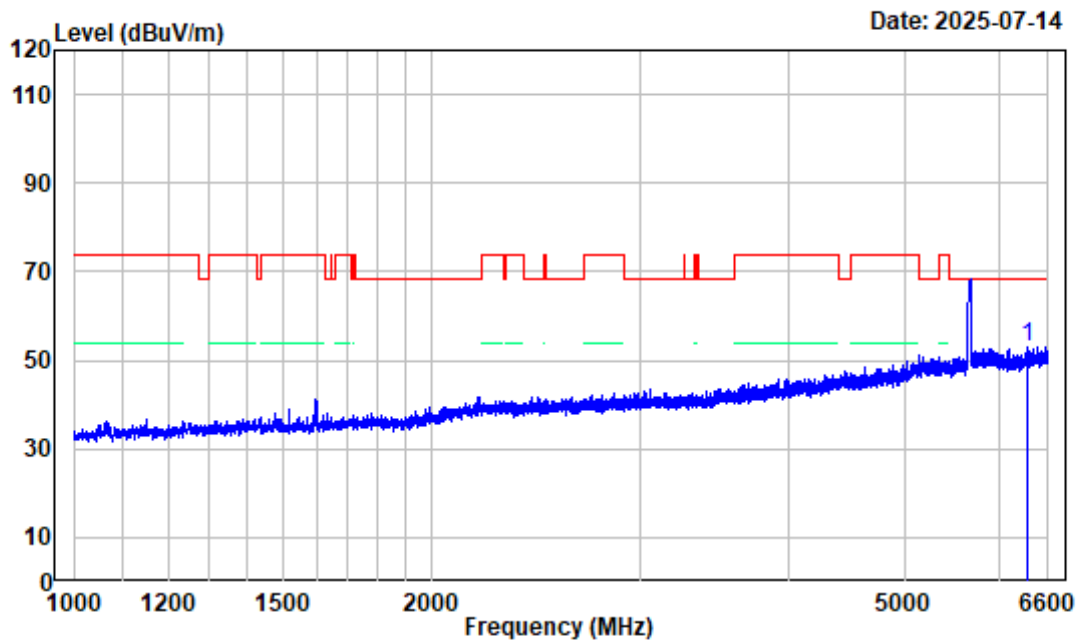

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5670MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6332.600	-4.48	57.44	52.96	68.20	-15.24 peak

802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

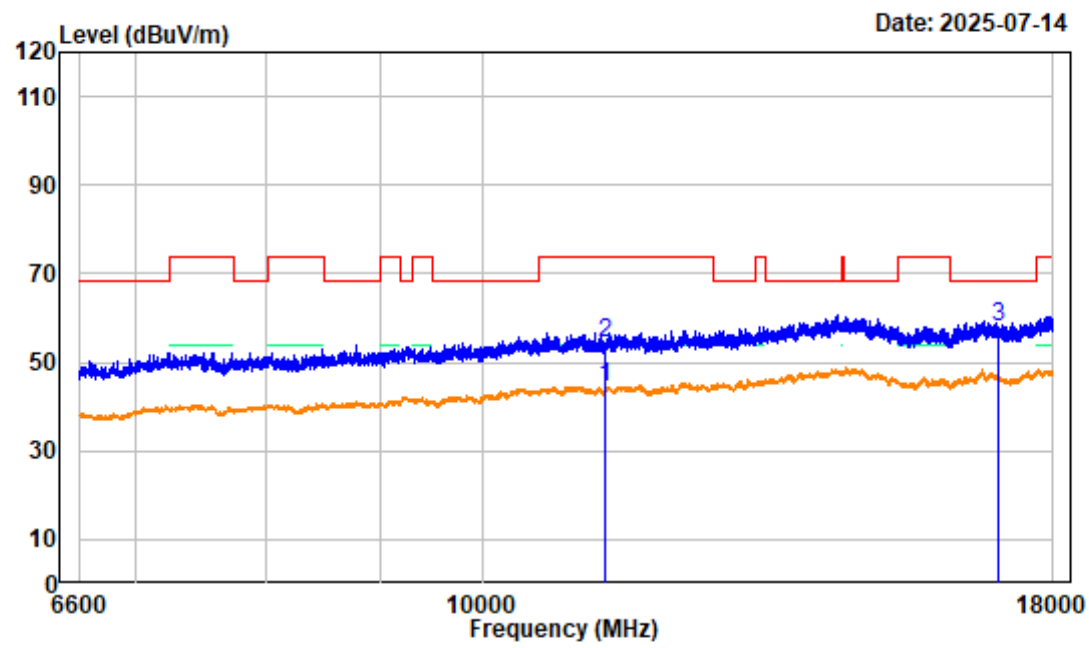

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX40 High Channel 5670MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	4.91	39.58	44.49	54.00	-9.51	average
2 11340.000	4.91	49.59	54.50	74.00	-19.50	peak
3 17010.000	7.57	50.36	57.93	68.20	-10.27	peak


802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

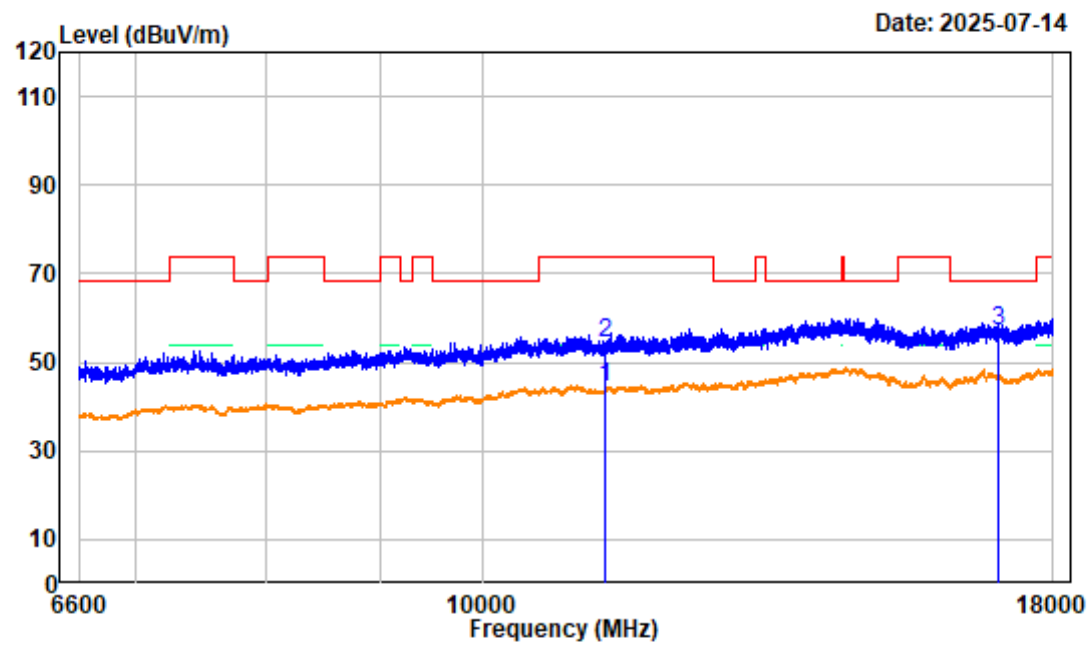

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5670MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	4.91	39.32	44.23	54.00	-9.77	average
2 11340.000	4.91	49.30	54.21	74.00	-19.79	peak
3 17010.000	7.57	49.56	57.13	68.20	-11.07	peak


802.11AX40 High Channel Bandedge_HORIZONTAL

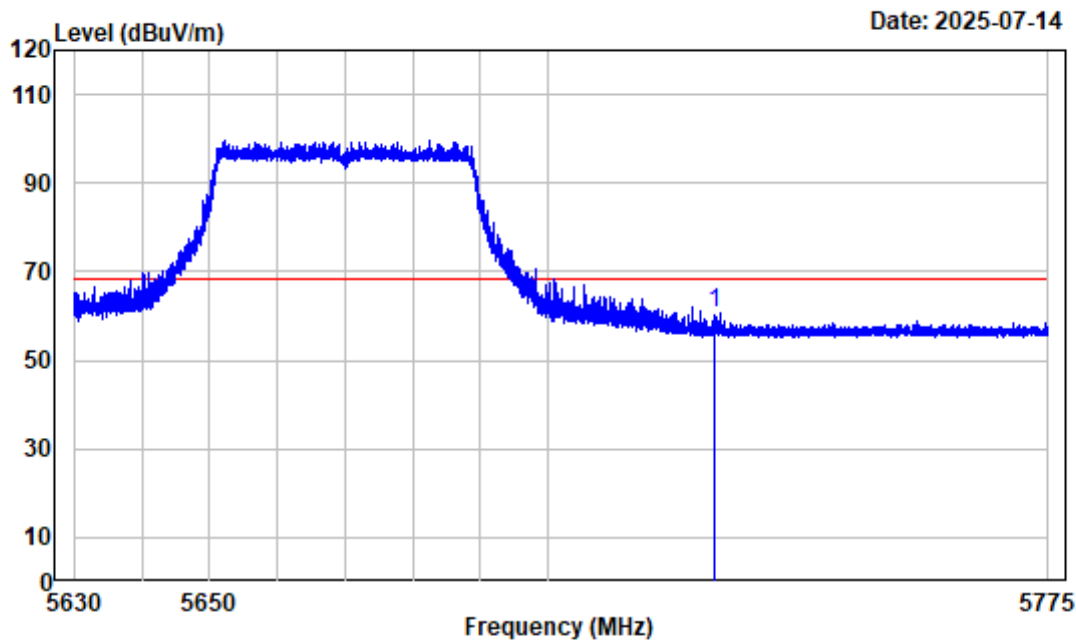

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5670MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	65.08	60.62	68.20	-7.58 peak

802.11AX40 High Channel Bandedge_VERTICAL

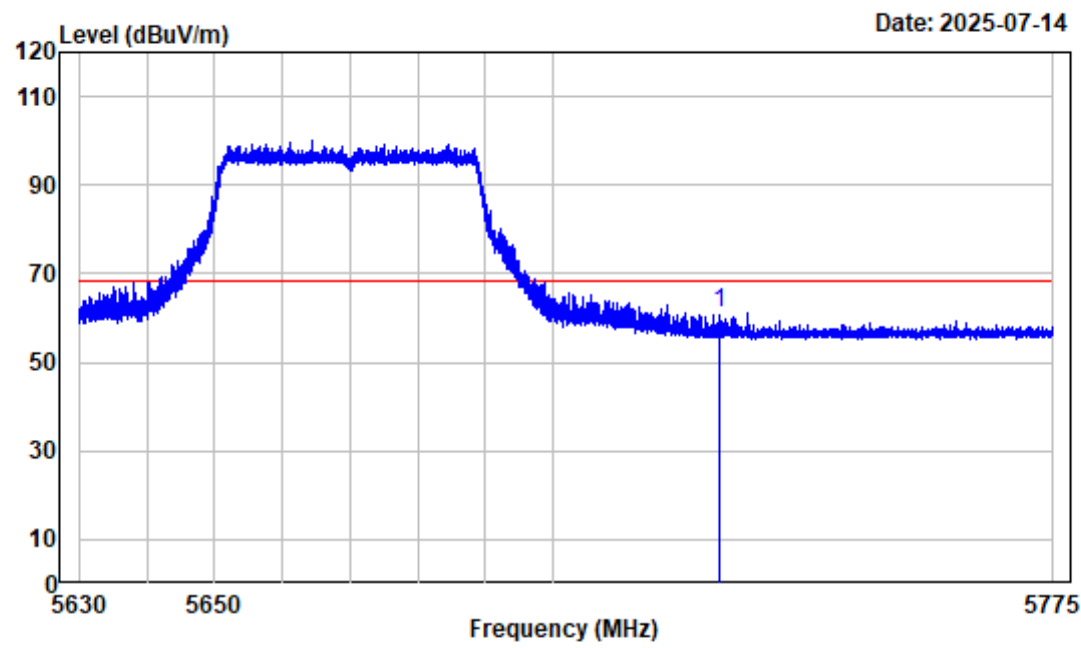


Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5670MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.46	65.46	61.00	68.20	-7.20 peak

For Band4:


802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

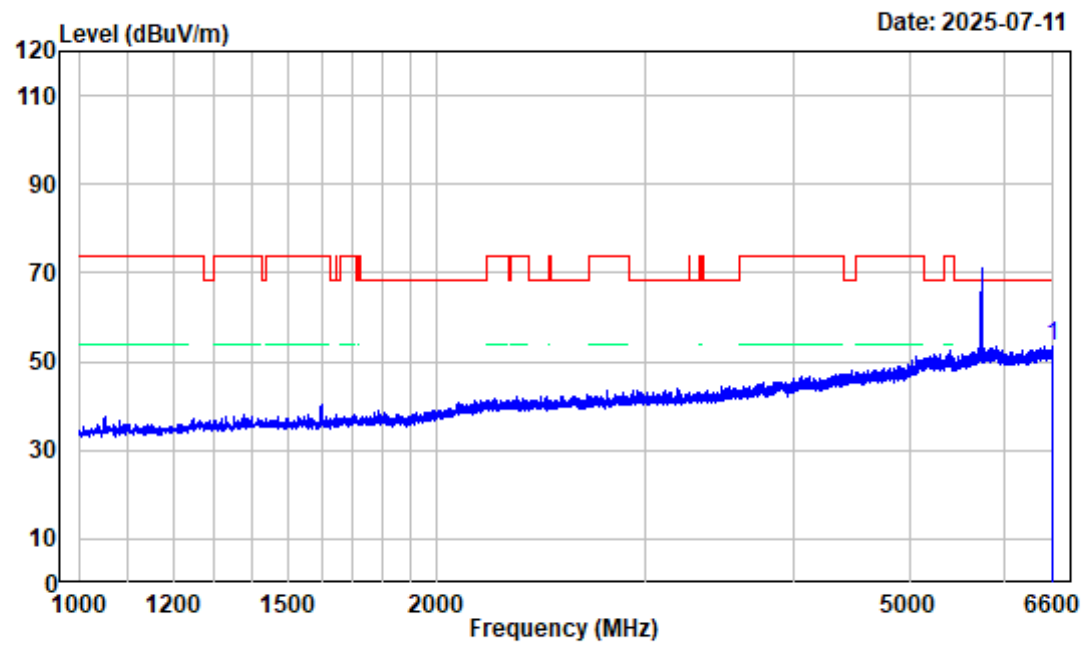

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6595.100	-3.56	57.05	53.49	68.20	-14.71	peak


802.11A Low Channel 1GHz-6.6GHz_VERTICAL

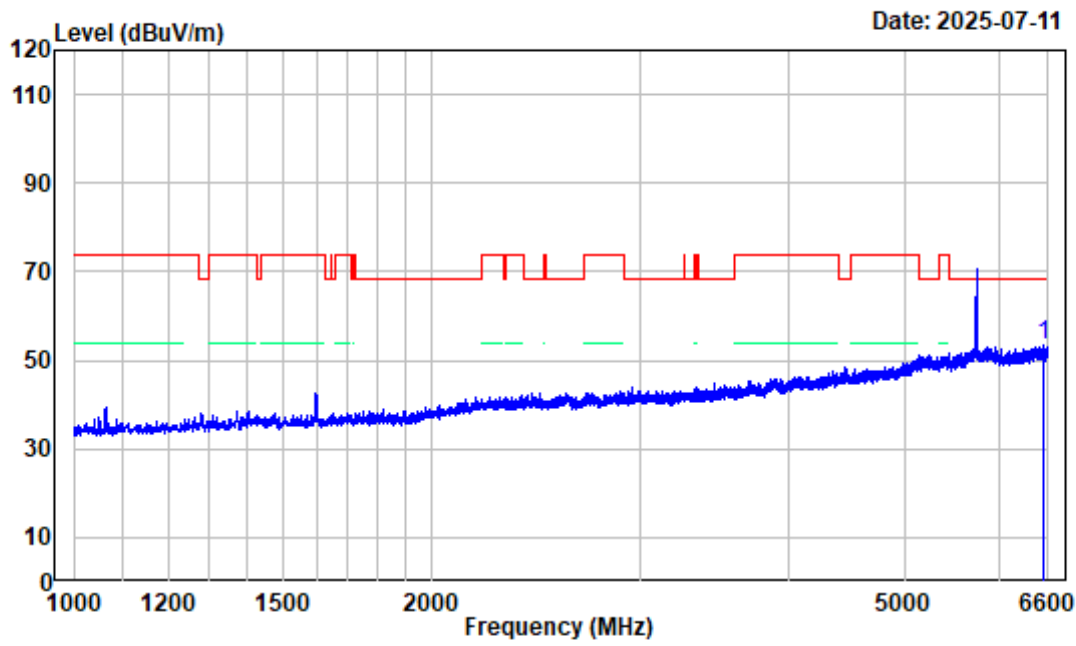

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6537.700	-3.74	57.02	53.28	68.20	-14.92	peak


802.11A Low Channel 6.6GHz-18GHz_HORIZONTAL

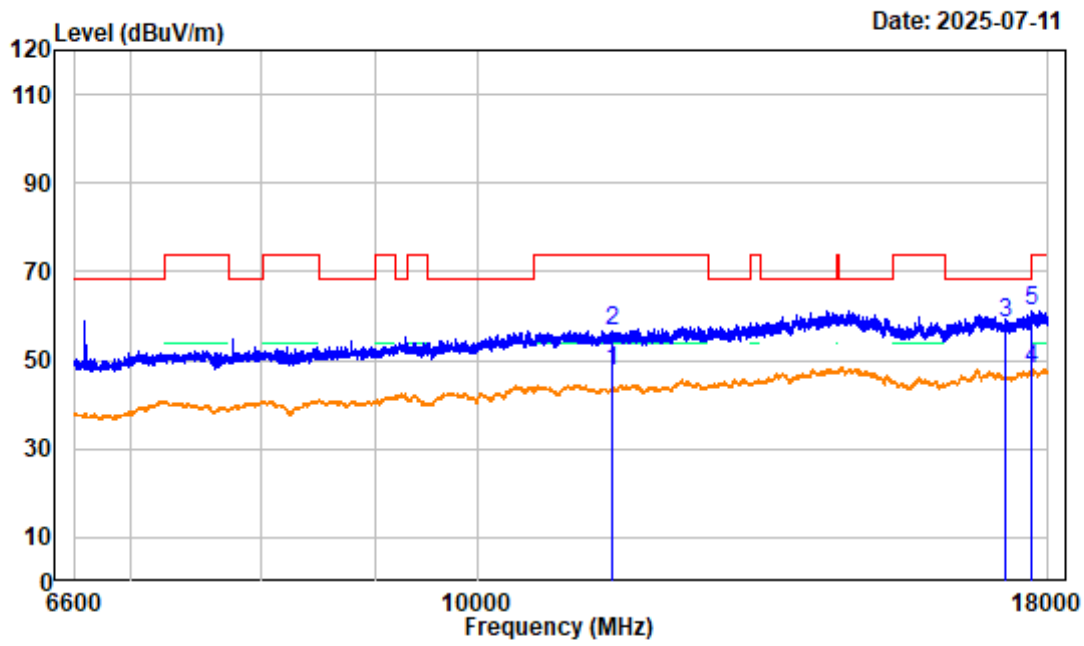

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5745MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.000	6.10	41.63	47.73	54.00	-6.27	average
2 11490.000	6.10	50.63	56.73	74.00	-17.27	peak
3 17235.000	6.76	51.61	58.37	68.20	-9.83	Peak
4 17700.750	7.61	40.17	47.78	54.00	-6.22	average
5 17700.750	7.61	53.54	61.15	74.00	-12.85	peak


802.11A Low Channel 6.6GHz-18GHz_VERTICAL

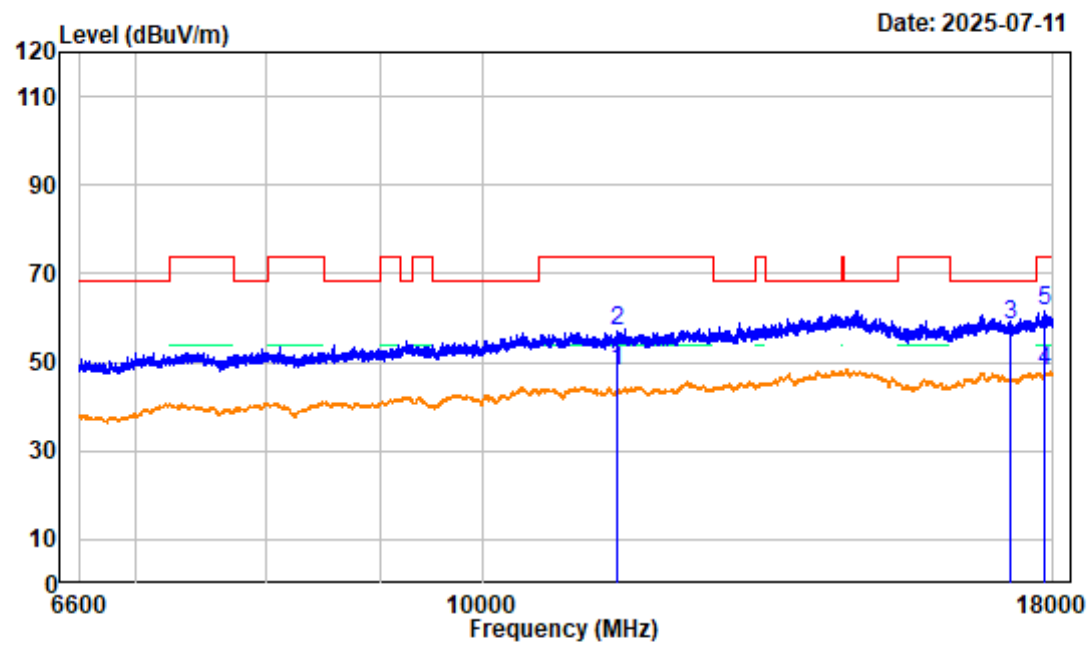

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5745MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.000	6.10	41.77	47.87	54.00	-6.13	average
2 11490.000	6.10	50.79	56.89	74.00	-17.11	peak
3 17235.000	6.76	51.44	58.20	68.20	-10.00	peak
4 17853.220	8.23	39.65	47.88	54.00	-6.12	average
5 17853.220	8.23	53.14	61.37	74.00	-12.63	peak


802.11A Low Channel Bandedge_HORIZONTAL

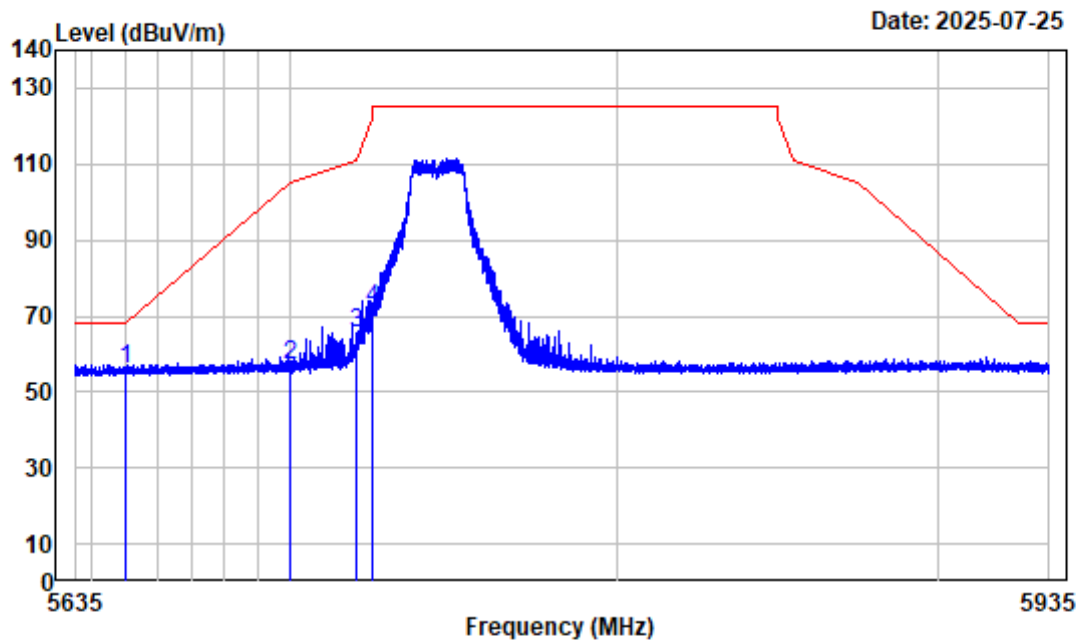

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5745MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.61	55.77	68.20	-12.43	peak
2	5700.000	-4.41	61.32	56.91	105.20	-48.29	peak
3	5720.000	-4.44	69.84	65.40	110.80	-45.40	peak
4	5725.000	-4.46	76.06	71.60	122.20	-50.60	peak


802.11A Low Channel Bandedge_VERTICAL

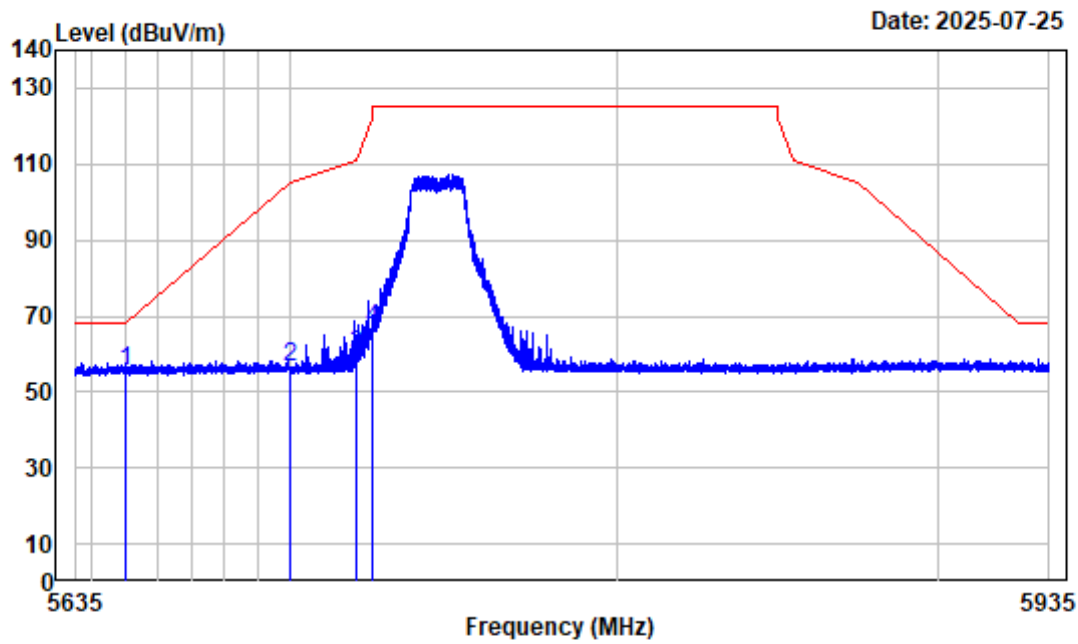

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5745MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.17	55.33	68.20	-12.87	peak
2	5700.000	-4.41	60.85	56.44	105.20	-48.76	peak
3	5720.000	-4.44	64.22	59.78	110.80	-51.02	peak
4	5725.000	-4.46	70.78	66.32	122.20	-55.88	peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

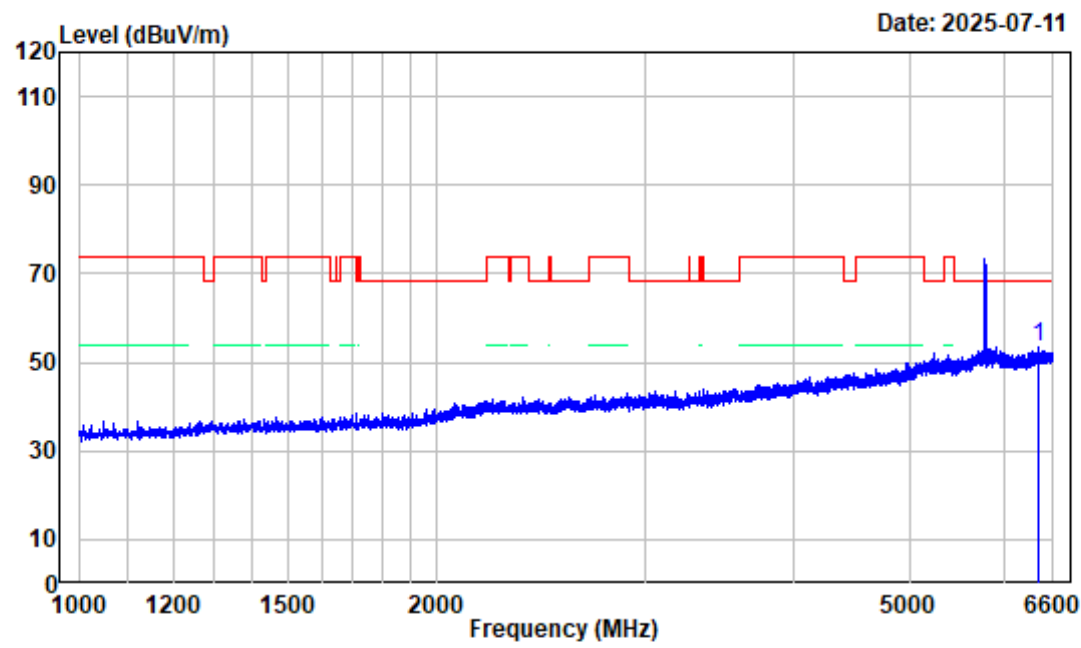

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6406.100	-3.66	56.87	53.21	68.20	-14.99 peak


802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

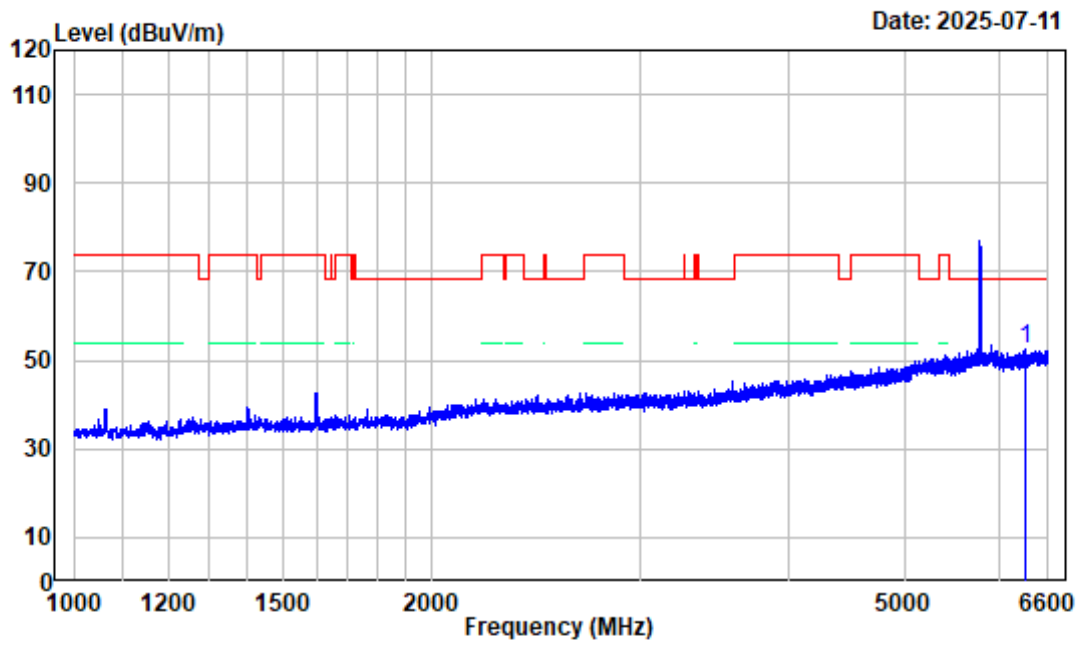

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6317.200	-4.45	56.93	52.48	68.20	-15.72 peak


802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

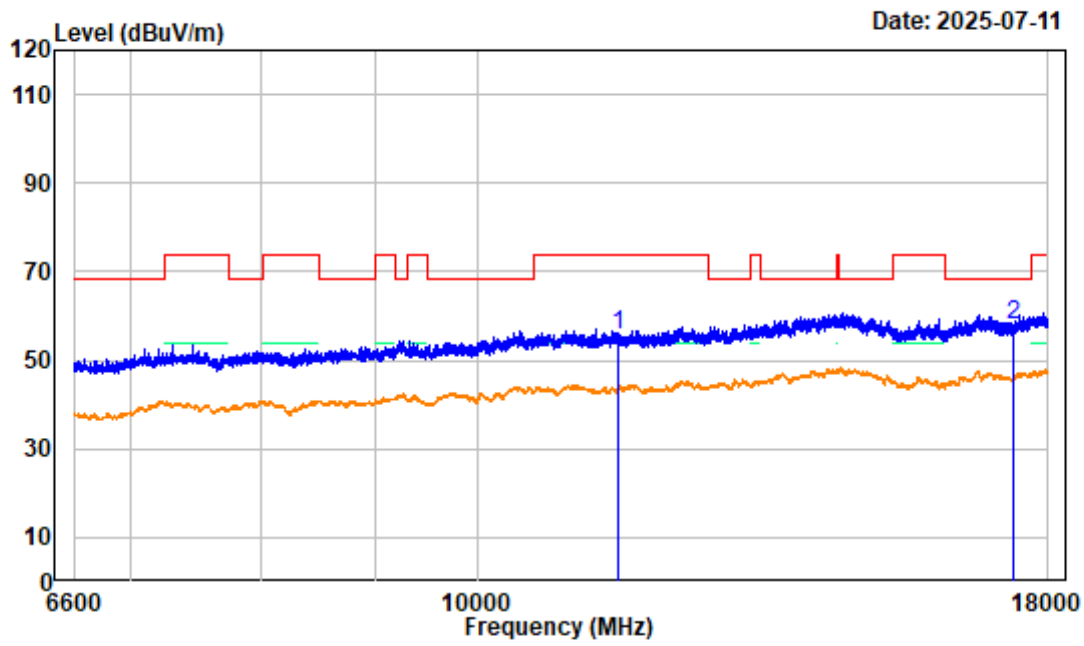

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.000	5.93	49.57	55.50	74.00	-18.50	peak
2 17355.000	6.58	51.28	57.86	68.20	-10.34	peak


802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

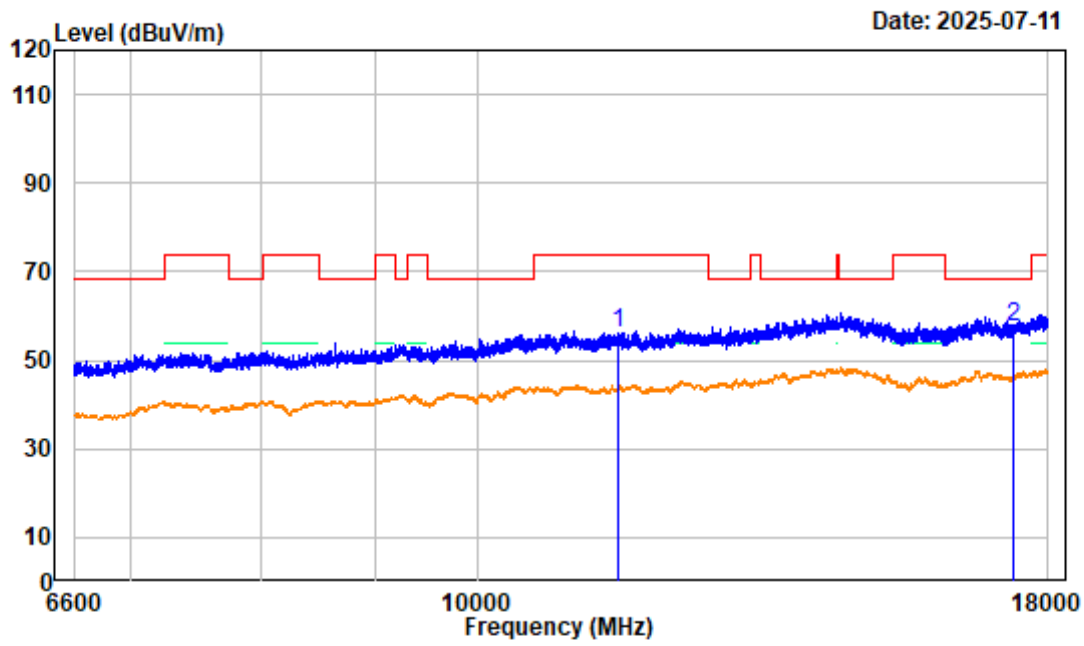

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.000	5.93	50.24	56.17	74.00	-17.83	peak
2 17355.000	6.58	51.15	57.73	68.20	-10.47	peak


802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

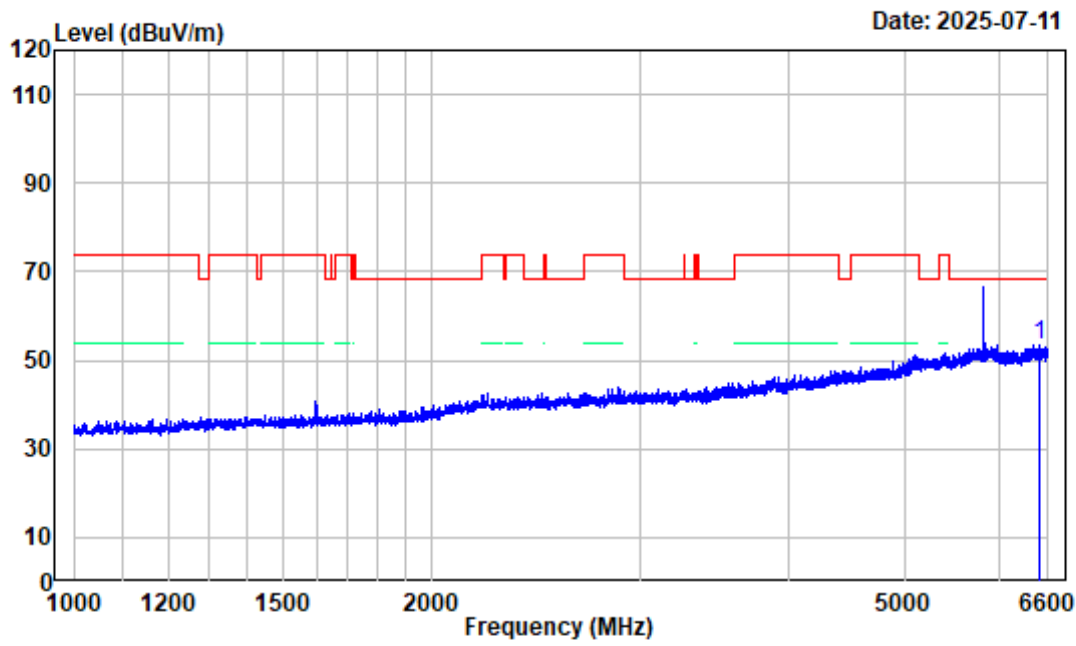

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6490.800	-3.78	57.36	53.58	68.20	-14.62	peak


802.11A High Channel 1GHz-6.6GHz_VERTICAL

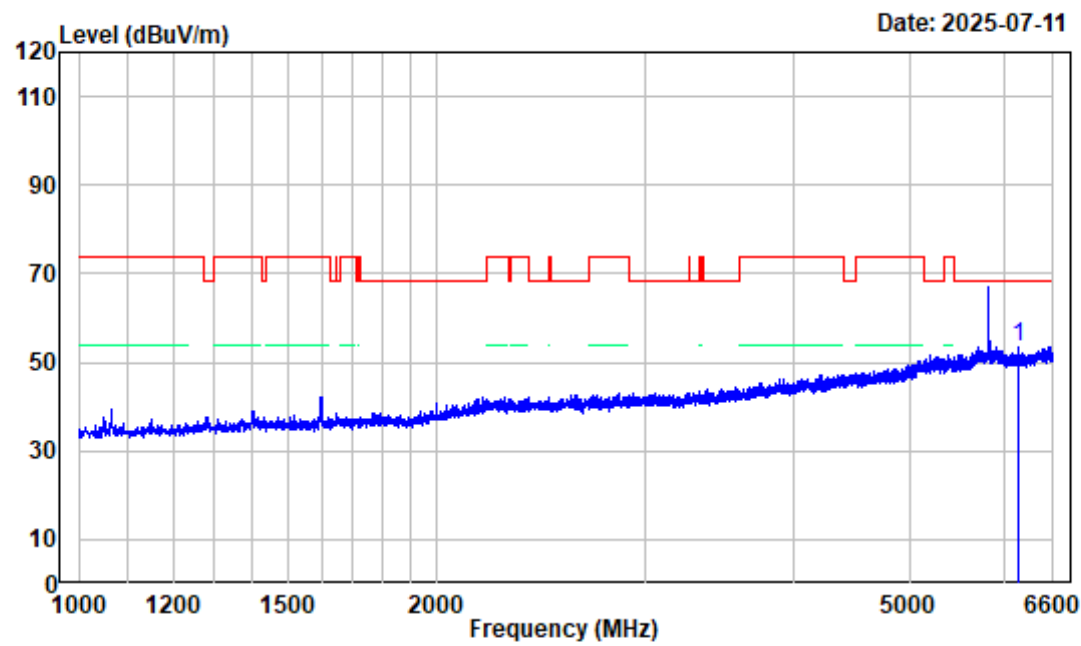

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6176.500	-4.67	58.14	53.47	68.20	-14.73 peak


802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

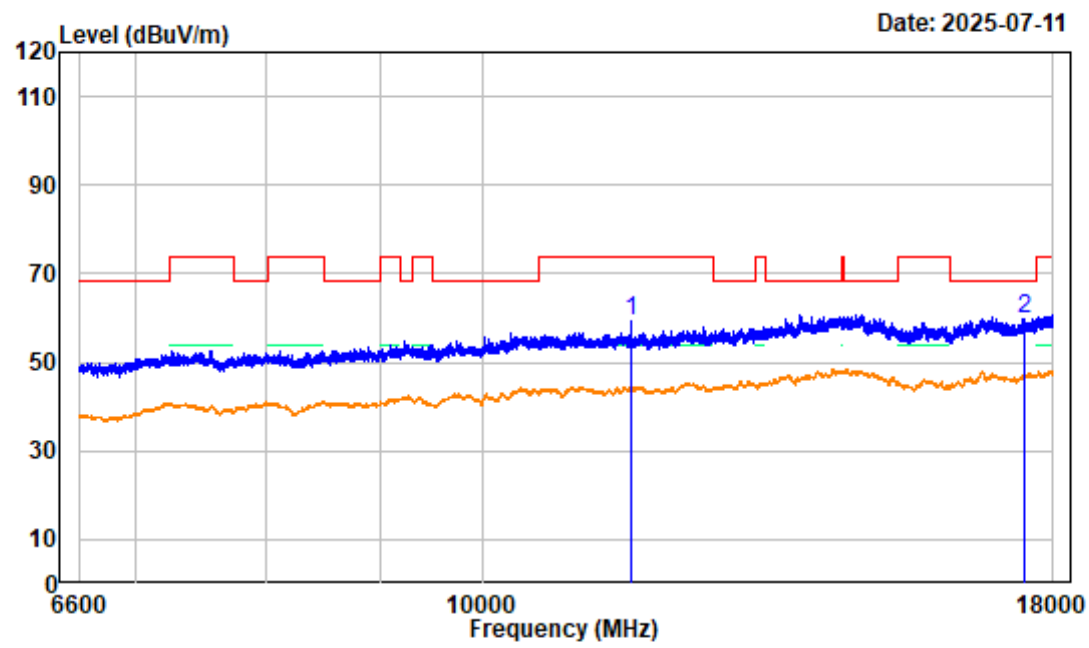

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	5.37	53.80	59.17	74.00	-14.83	peak
2 17475.000	7.12	52.51	59.63	68.20	-8.57	peak


802.11A High Channel 6.6GHz-18GHz_VERTICAL

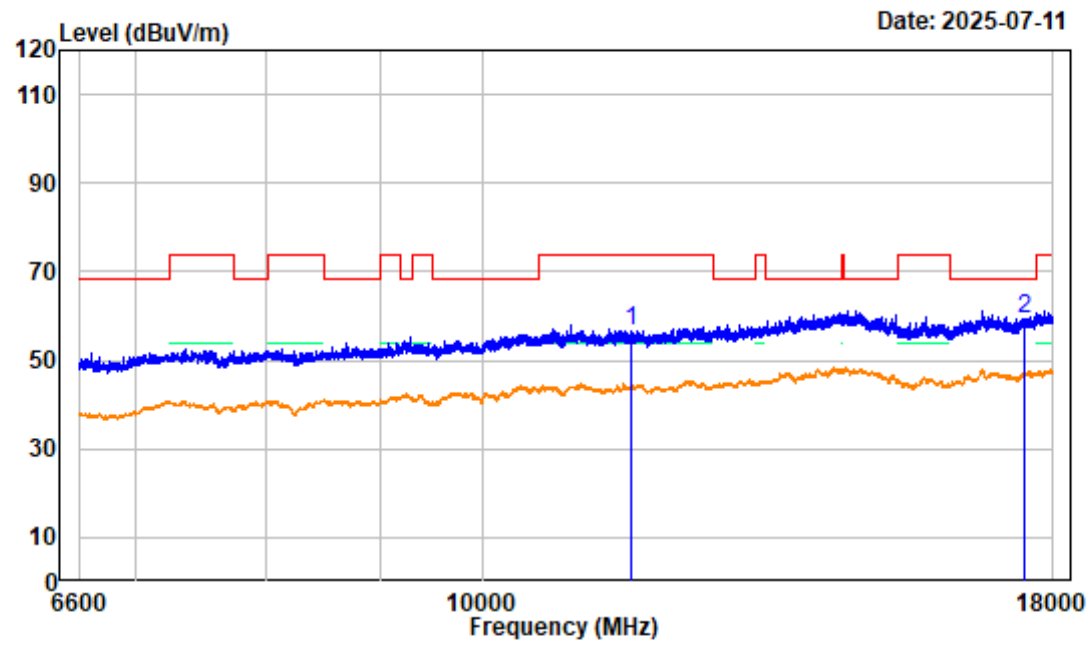

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	5.37	51.11	56.48	74.00	-17.52	peak
2 17475.000	7.12	51.98	59.10	68.20	-9.10	peak


802.11A High Channel Bandedge_HORIZONTAL

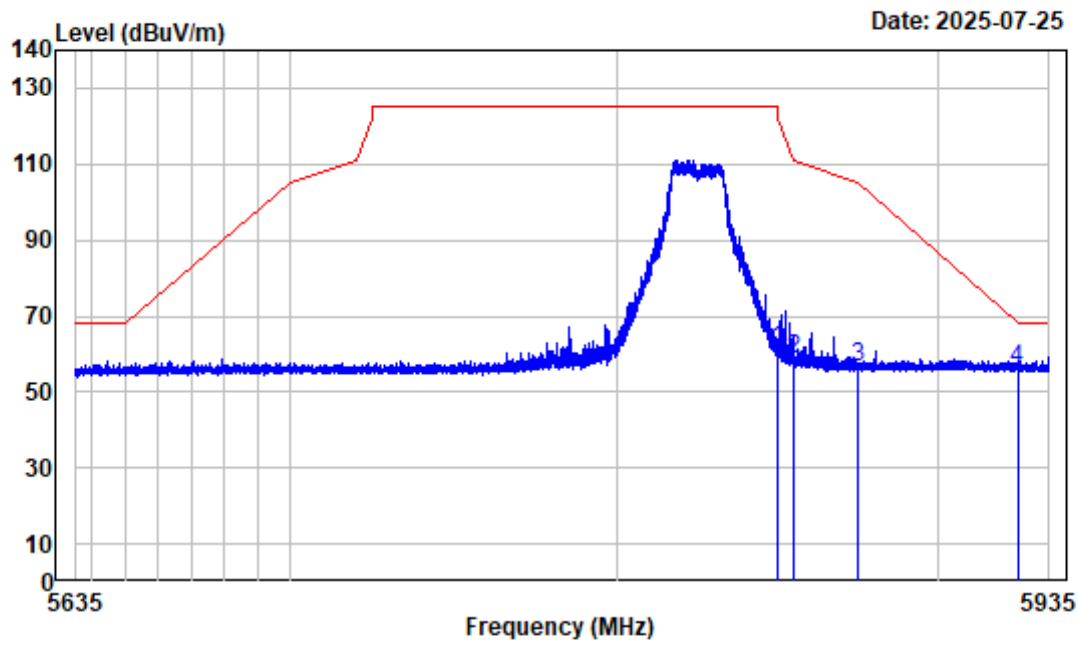

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	66.07	61.54	122.20	-60.66	peak
2	5855.000	-4.48	63.07	58.59	110.80	-52.21	peak
3	5875.000	-4.28	60.61	56.33	105.20	-48.87	peak
4	5925.000	-4.43	60.66	56.23	68.20	-11.97	peak


802.11A High Channel Bandedge_VERTICAL

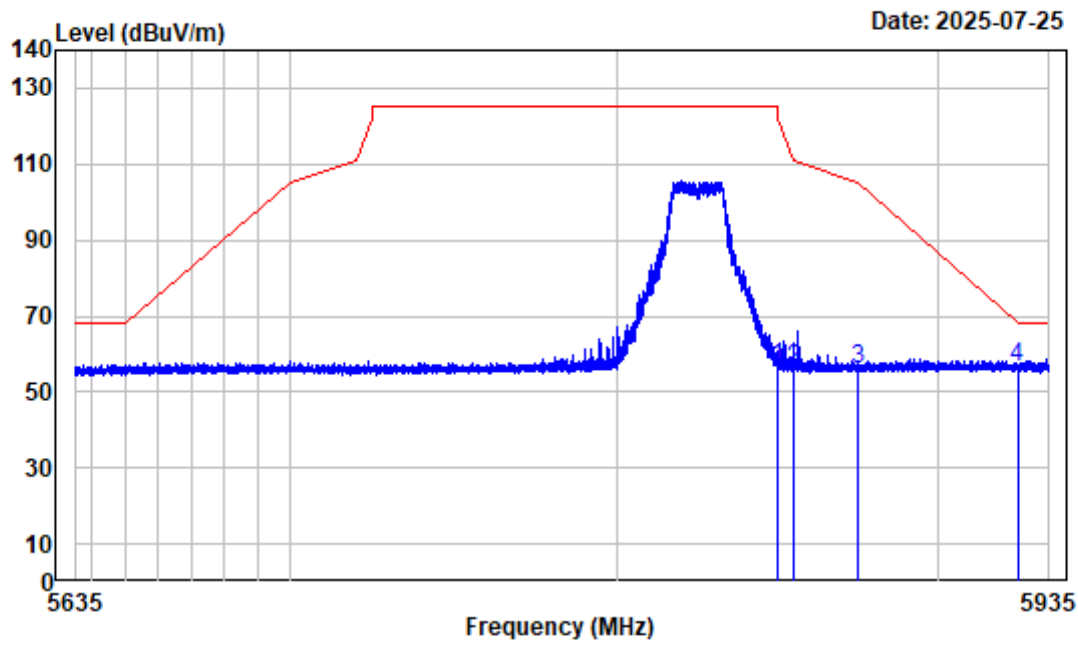

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5825MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	61.21	56.68	122.20	-65.52	peak
2	5855.000	-4.48	60.62	56.14	110.80	-54.66	peak
3	5875.000	-4.28	60.32	56.04	105.20	-49.16	peak
4	5925.000	-4.43	60.86	56.43	68.20	-11.77	peak


802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

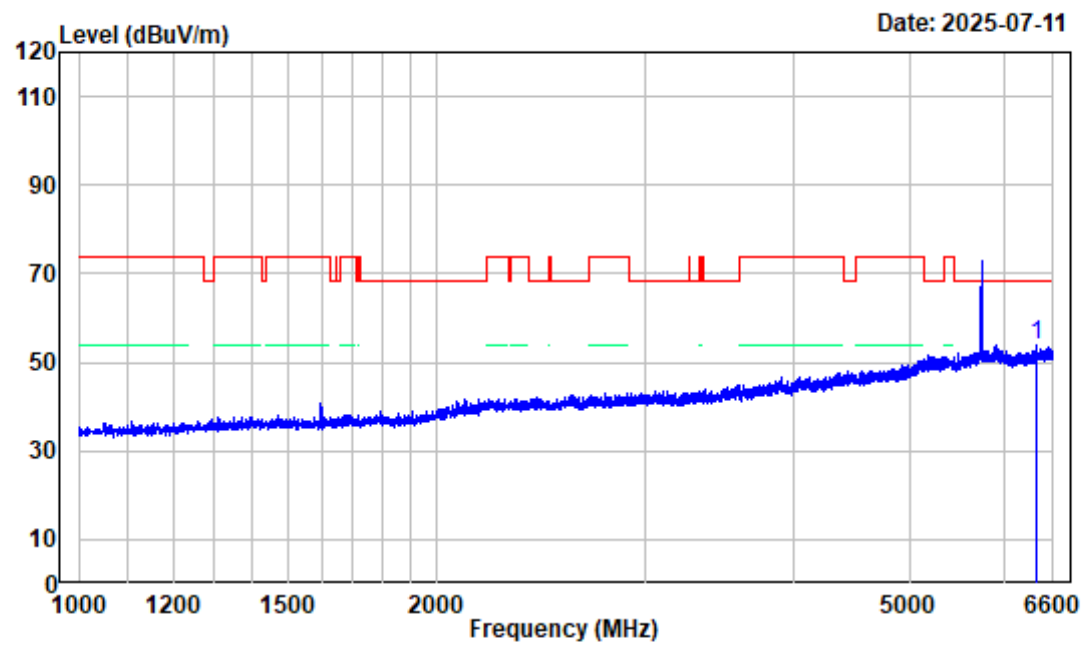

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6401.900	-3.67	57.55	53.88	68.20	-14.32	peak


802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

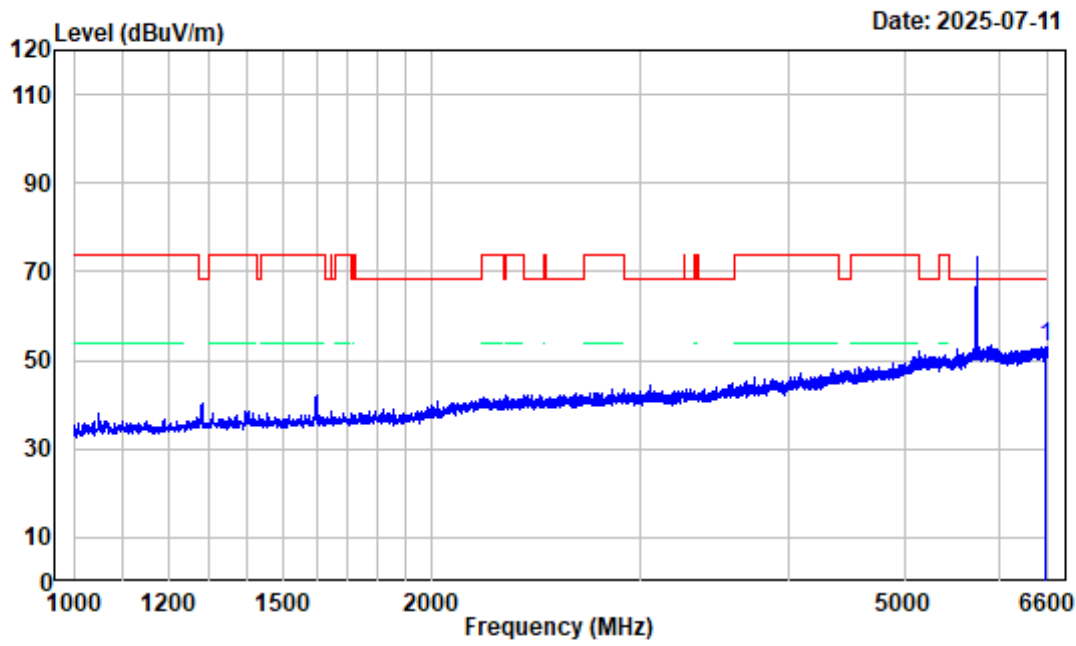

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6576.900	-3.63	56.75	53.12	68.20	-15.08	peak


802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

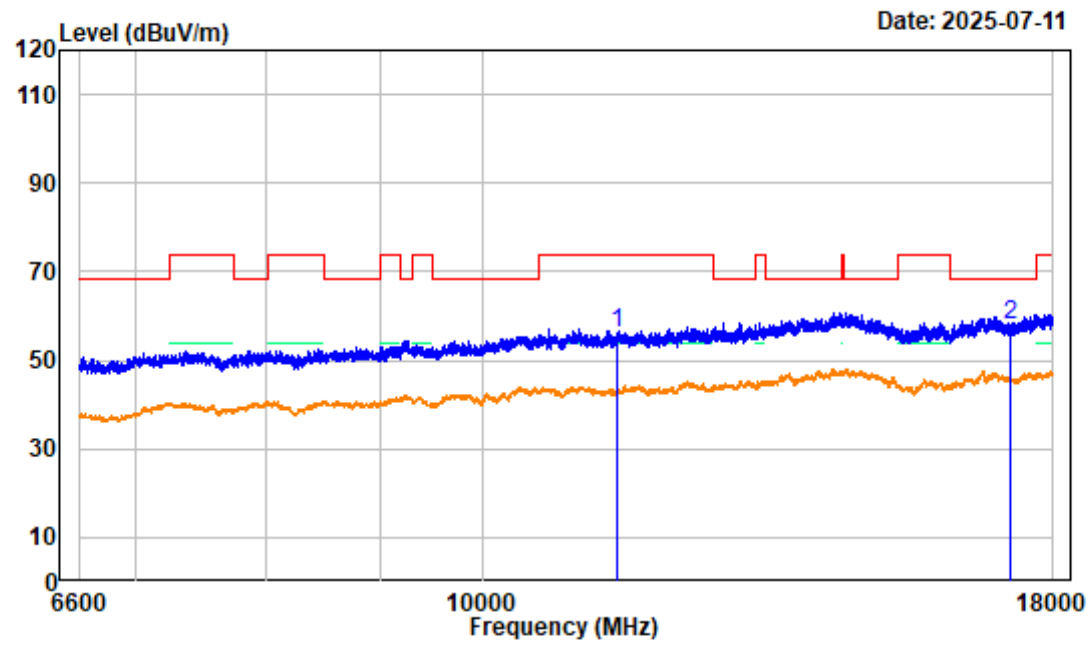

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.000	6.10	50.02	56.12	74.00	-17.88	peak
2 17235.000	6.76	51.21	57.97	68.20	-10.23	peak


802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

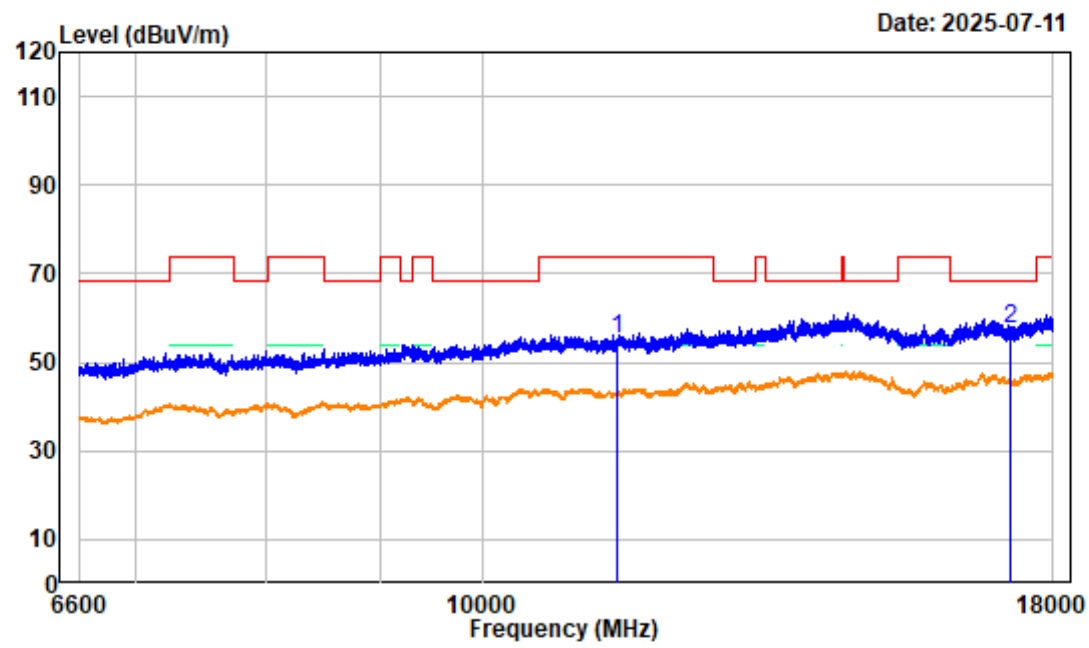

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.000	6.10	49.00	55.10	74.00	-18.90	peak
2 17235.000	6.76	50.94	57.70	68.20	-10.50	peak


802.11AC20 Low Channel 18GHz-26.5GHz_HORIZONTAL

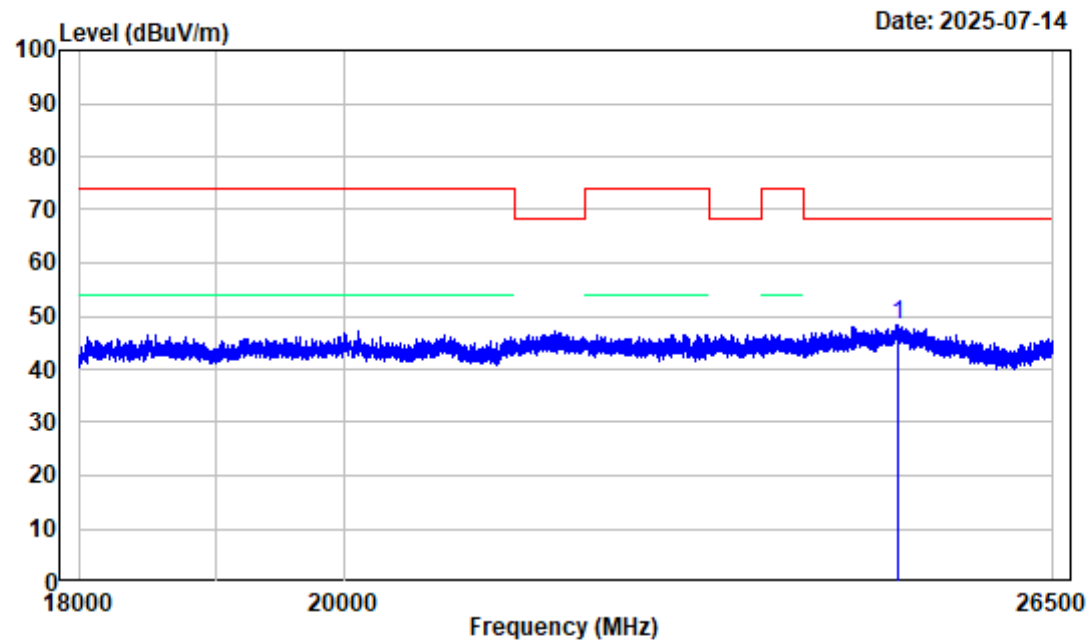

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 18GHz-26.5GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24915.810	2.94	45.46	48.40	68.20	-19.80	Peak


802.11AC20 Low Channel 18GHz-26.5GHz_VERTICAL

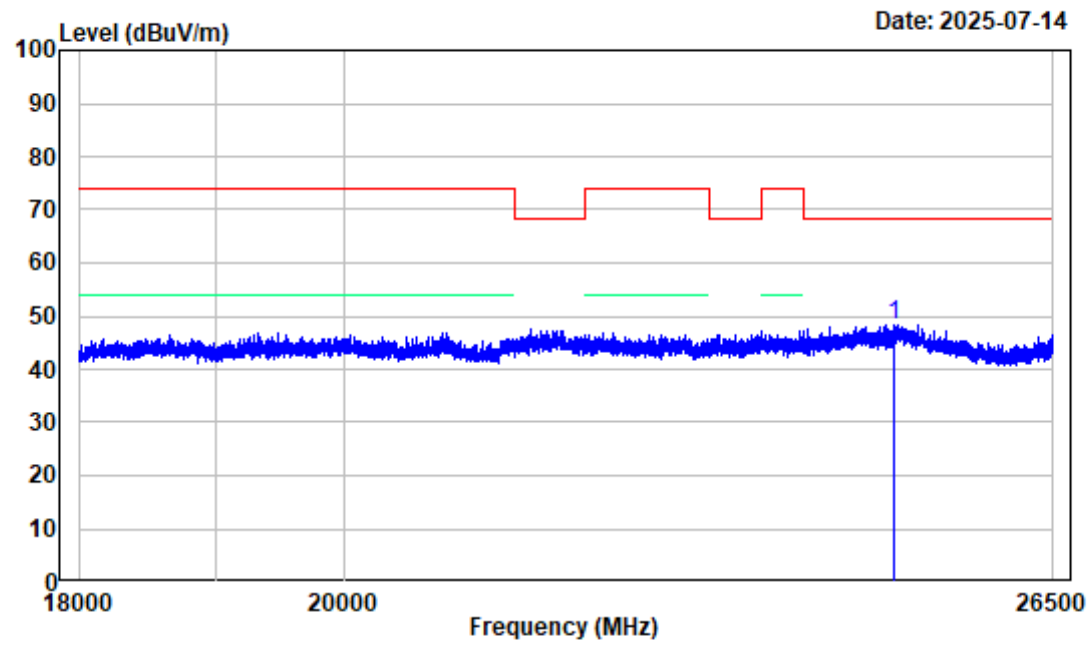

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 18GHz-26.5GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 24871.190	0.33	48.03	48.36	68.20	-19.84	Peak


802.11AC20 Low Channel 26.5GHz-40GHz_HORIZONTAL

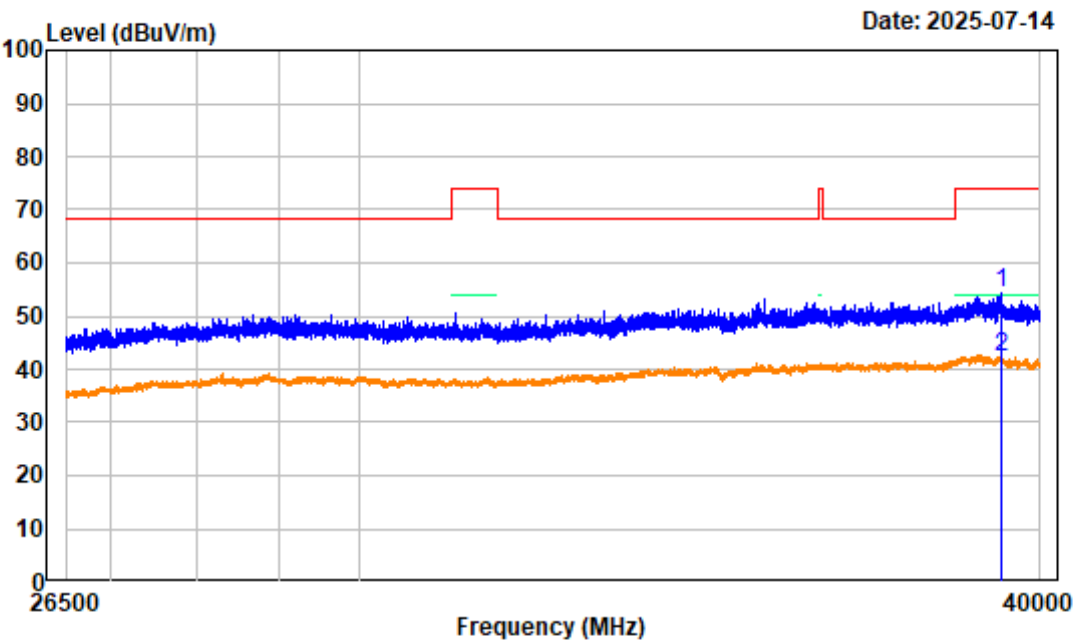

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 26.5GHz-40GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39353.690	2.68	51.77	54.45	74.00	-19.55	Peak
2 39353.690	2.68	39.77	42.45	54.00	-11.55	Average


802.11AC20 Low Channel 26.5GHz-40GHz_VERTICAL

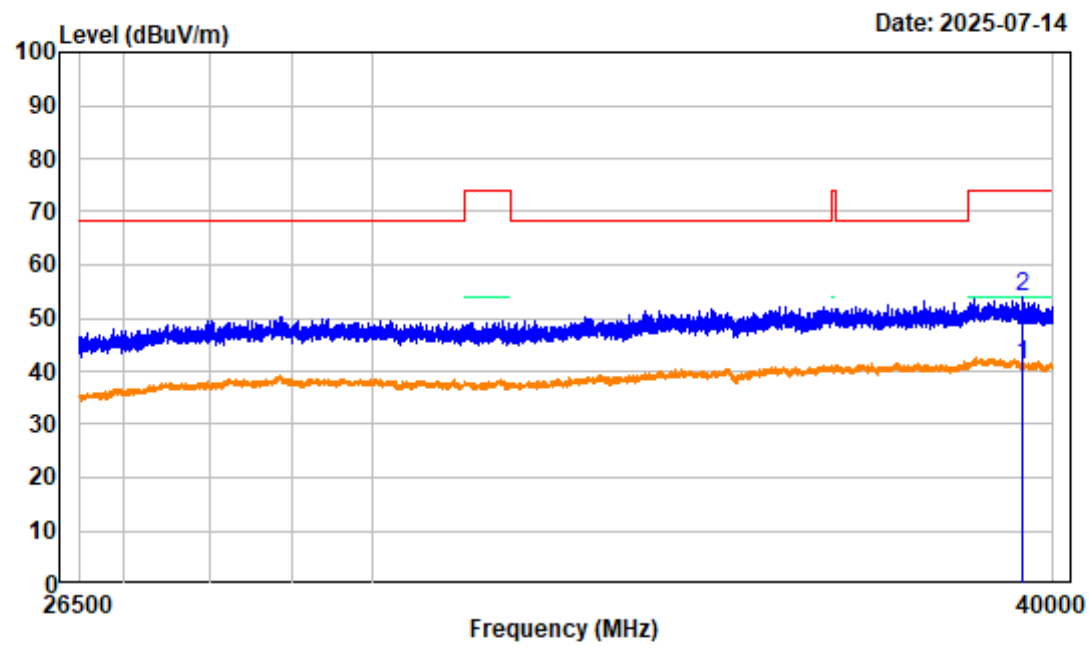

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz 26.5GHz-40GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:3kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39480.250	1.16	39.83	40.99	54.00	-13.01	Average
2 39480.250	1.16	52.81	53.97	74.00	-20.03	Peak


802.11AC20 Low Channel Bandedge_HORIZONTAL

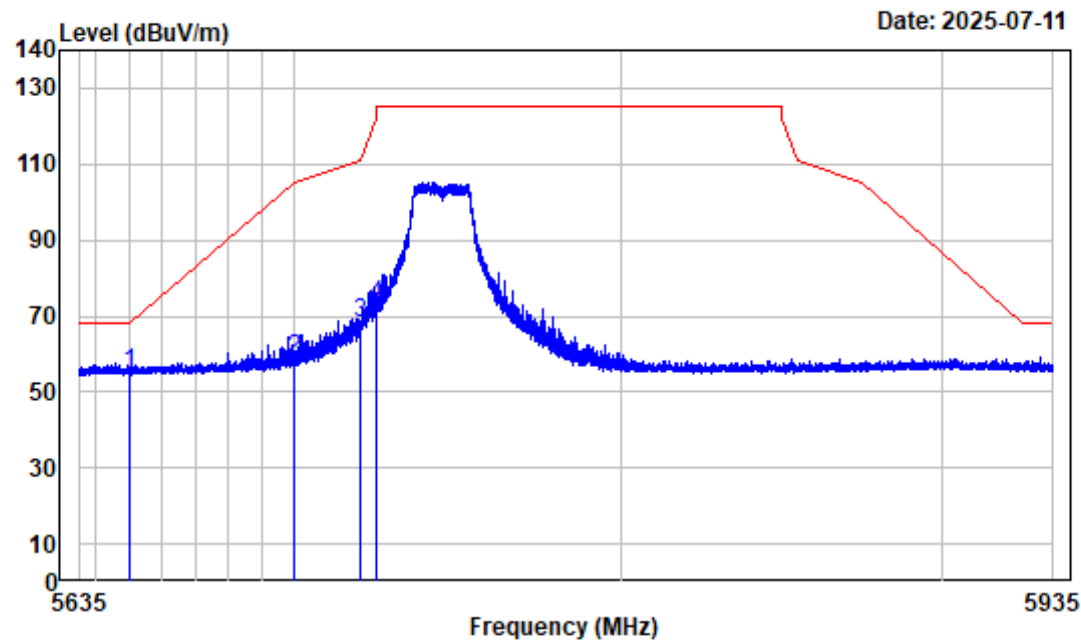

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.04	55.20	68.20	-13.00	peak
2	5700.000	-4.41	63.24	58.83	105.20	-46.37	peak
3	5720.000	-4.44	72.38	67.94	110.80	-42.86	peak
4	5725.000	-4.46	77.15	72.69	122.20	-49.51	peak


802.11AC20 Low Channel Bandedge_VERTICAL

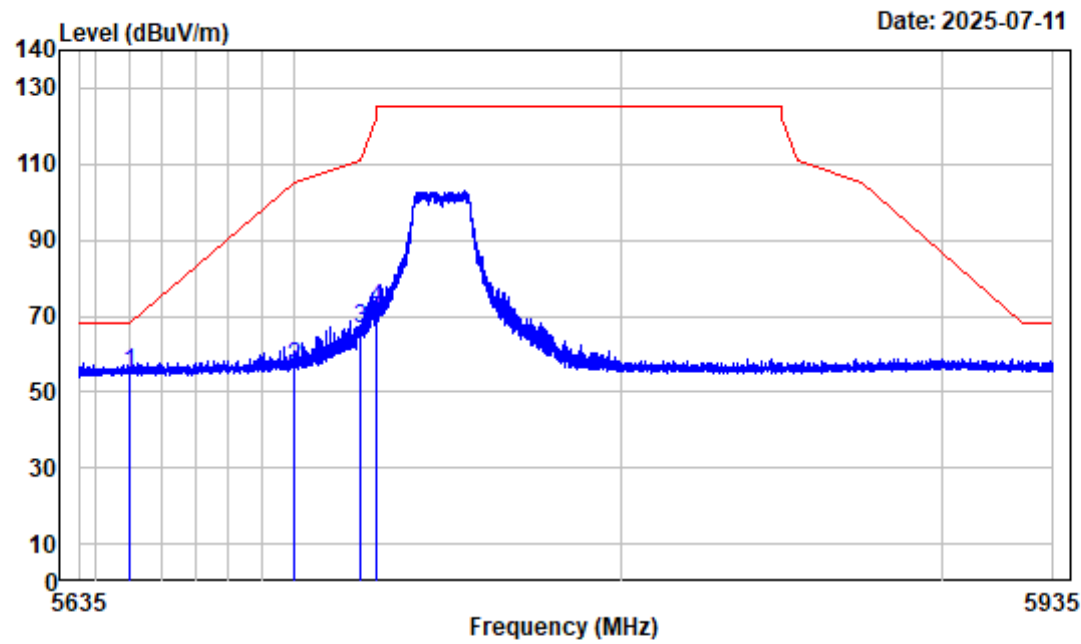

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.63	54.79	68.20	-13.41	peak
2	5700.000	-4.41	60.92	56.51	105.20	-48.69	peak
3	5720.000	-4.44	70.90	66.46	110.80	-44.34	peak
4	5725.000	-4.46	76.24	71.78	122.20	-50.42	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

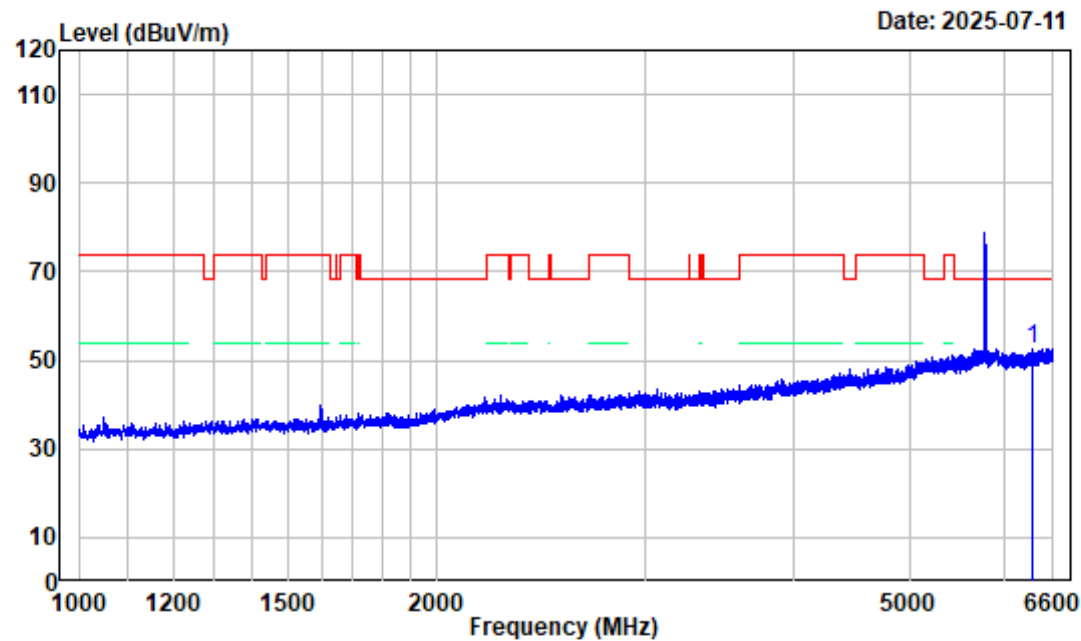

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC20 Middle Channel 5785MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6350.100	-4.53	57.22	52.69	68.20	-15.51 peak


802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

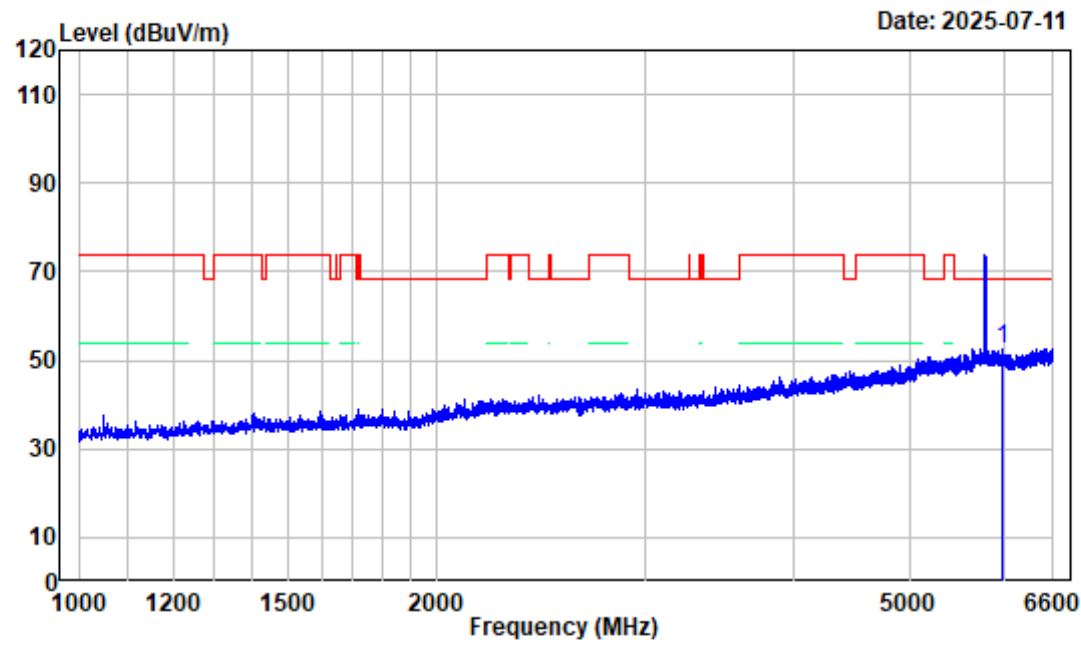

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5977.000	-4.86	57.55	52.69	68.20	-15.51 peak


802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

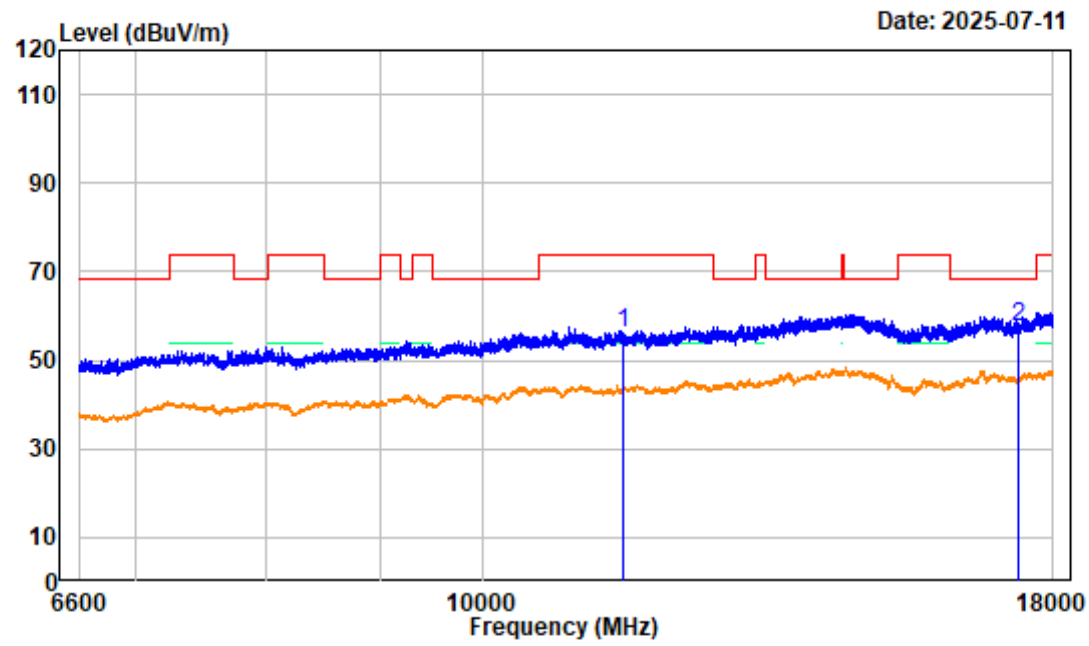

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5785MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.000	5.93	50.13	56.06	74.00	-17.94	peak
2 17355.000	6.58	51.15	57.73	68.20	-10.47	peak


802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

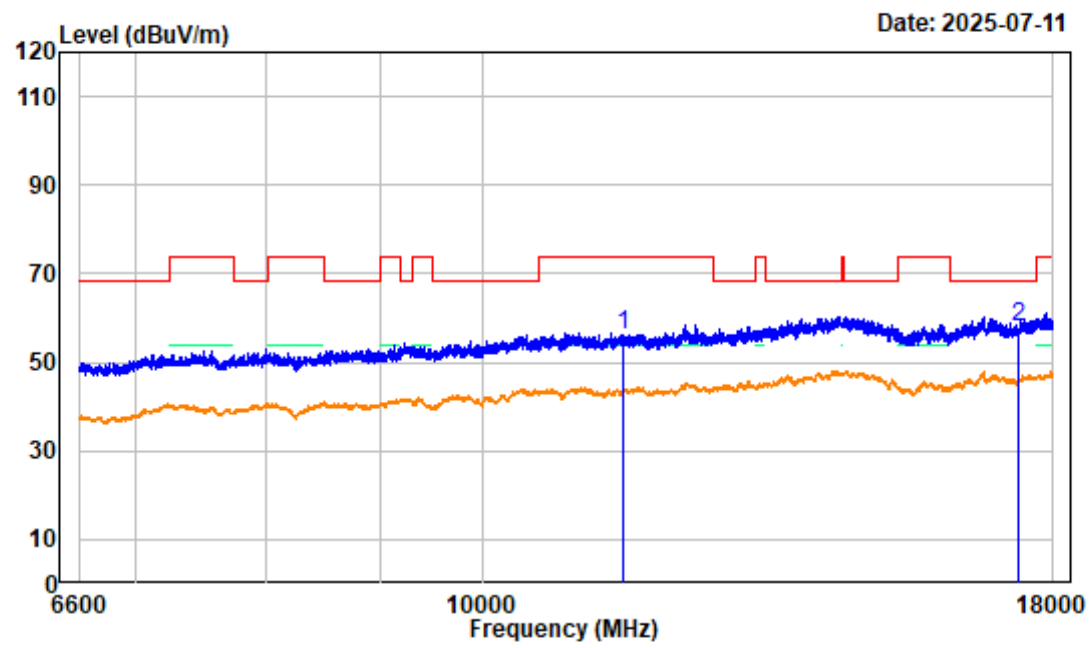

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Middle Channel 5785MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.000	5.93	50.12	56.05	74.00	-17.95	peak
2 17355.000	6.58	51.22	57.80	68.20	-10.40	peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

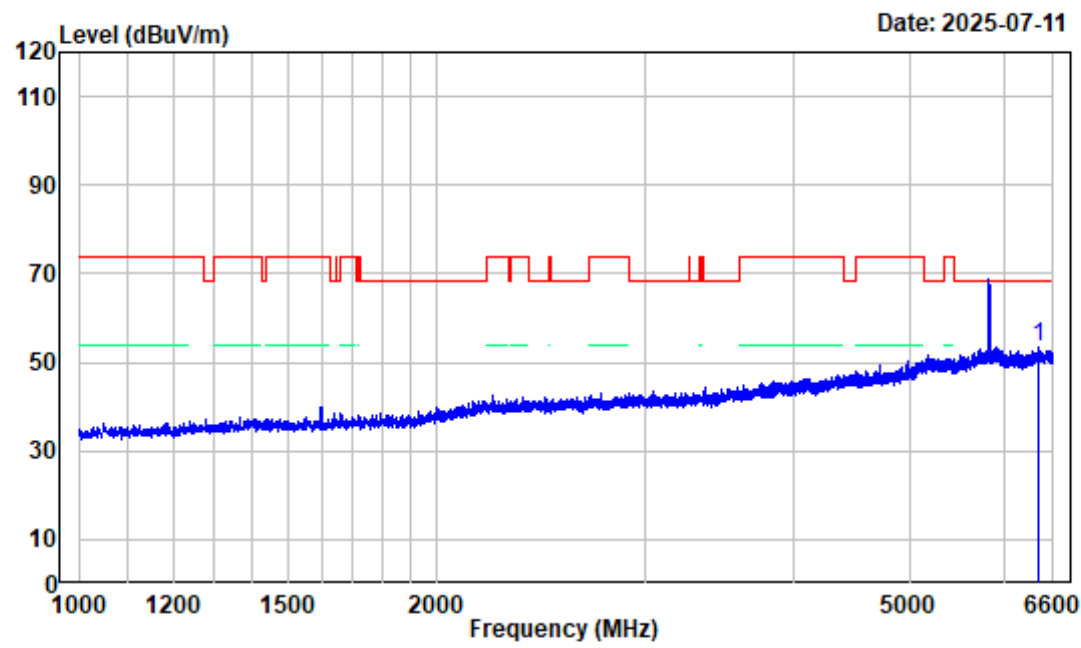

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6418.700	-3.64	57.16	53.52	68.20	-14.68	peak


802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

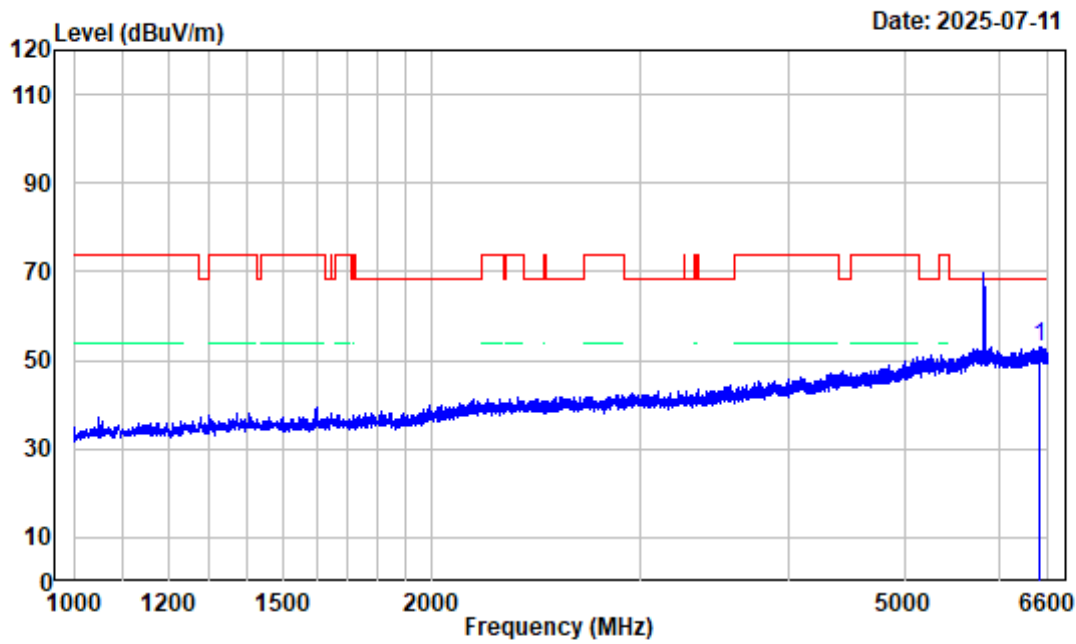

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6489.400	-3.78	56.83	53.05	68.20	-15.15	peak

802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

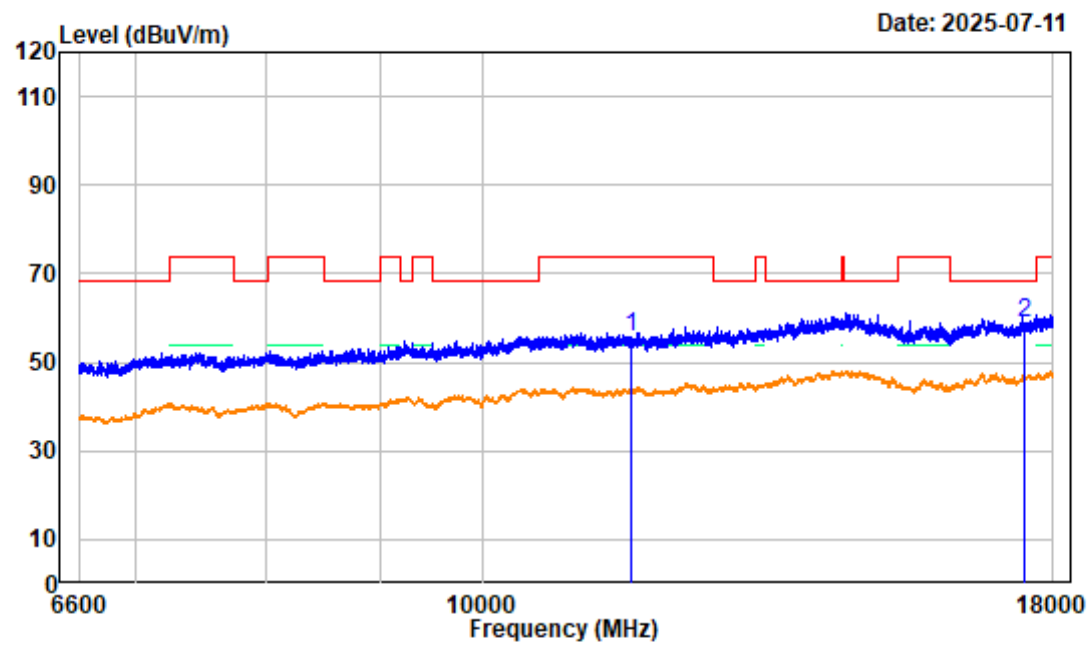

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC20 High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	5.37	50.22	55.59	74.00	-18.41	peak
2 17475.000	7.12	51.61	58.73	68.20	-9.47	peak


802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

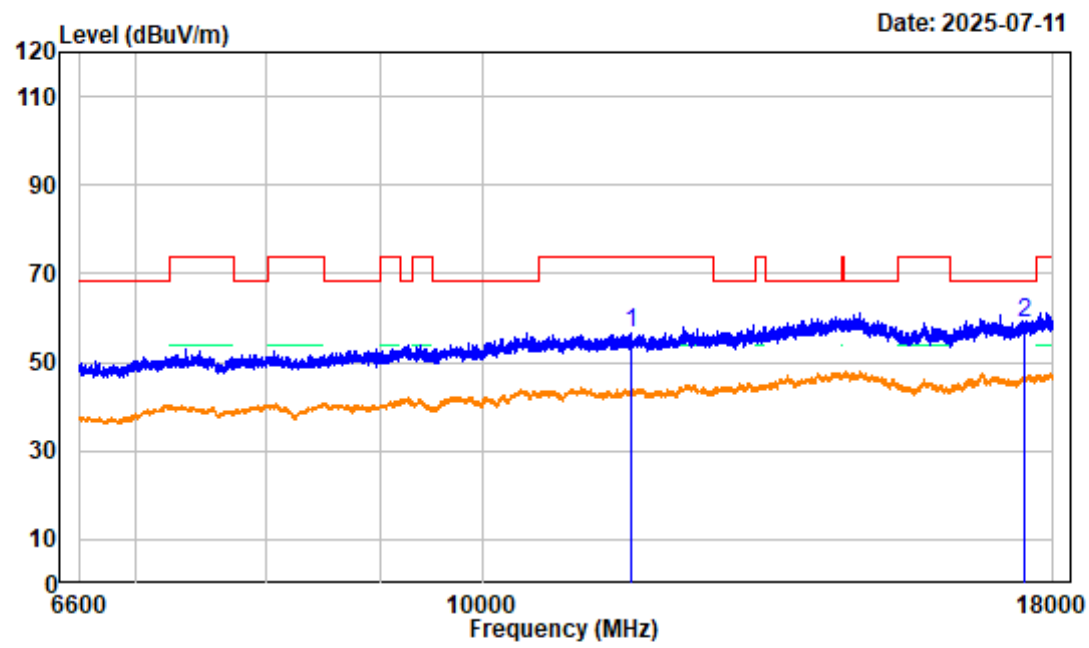

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	5.37	51.17	56.54	74.00	-17.46	peak
2 17475.000	7.12	51.61	58.73	68.20	-9.47	peak


802.11AC20 High Channel Bandedge_HORIZONTAL

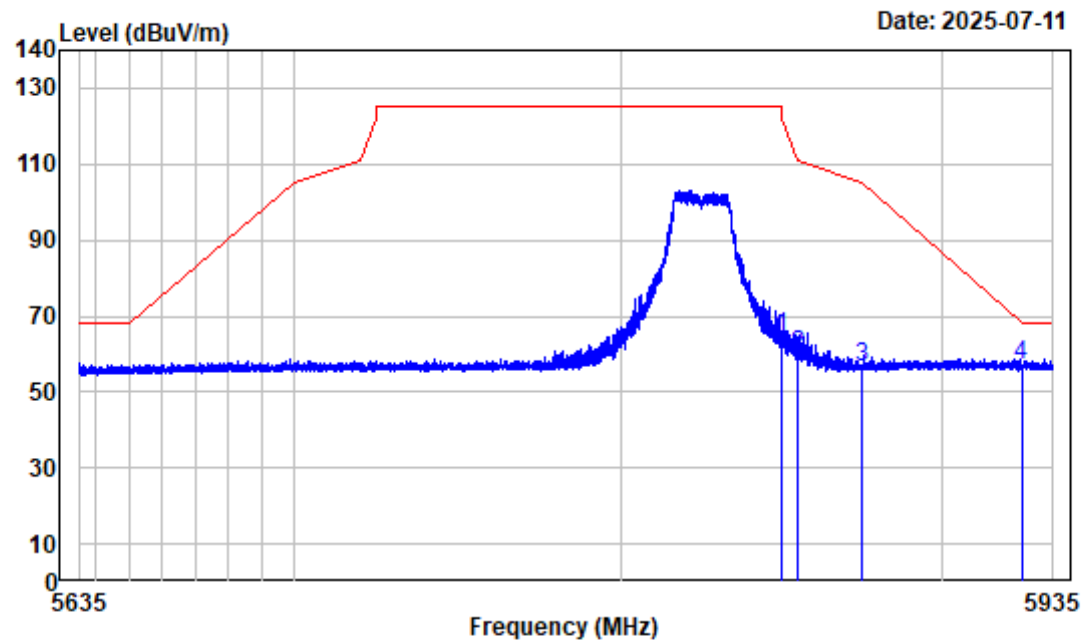

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5825MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	68.75	64.22	122.20	-57.98	peak
2	5855.000	-4.48	64.33	59.85	110.80	-50.95	peak
3	5875.000	-4.28	60.87	56.59	105.20	-48.61	peak
4	5925.000	-4.43	61.64	57.21	68.20	-10.99	peak


802.11AC20 High Channel Bandedge_VERTICAL

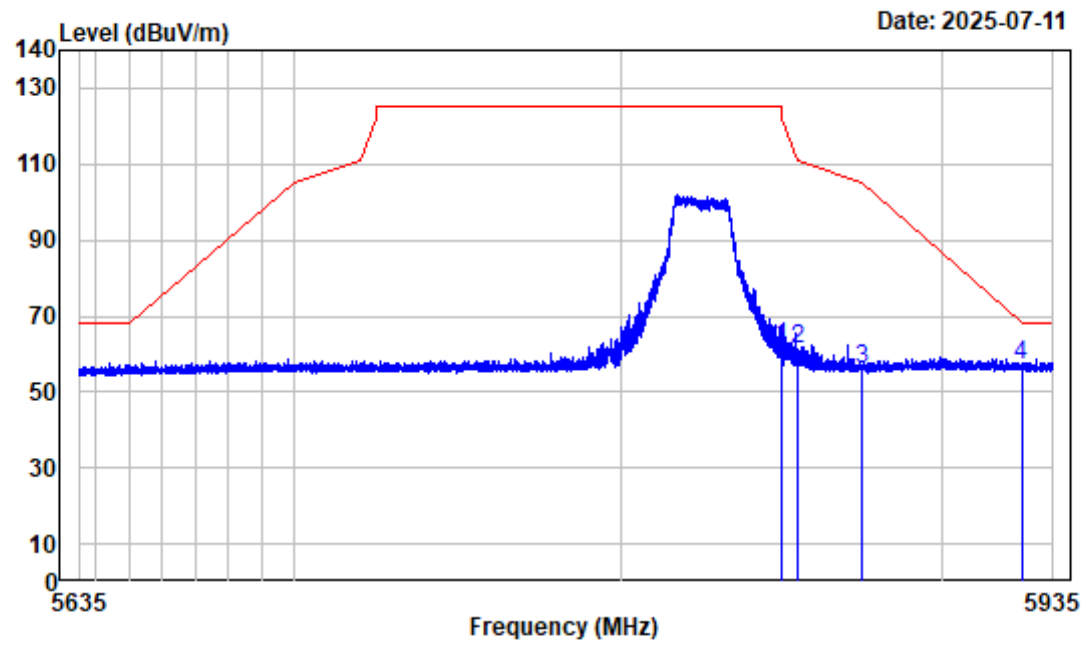

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 High Channel 5825MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	66.18	61.65	122.20	-60.55 peak
2	5855.000	-4.48	65.79	61.31	110.80	-49.49 peak
3	5875.000	-4.28	60.34	56.06	105.20	-49.14 peak
4	5925.000	-4.43	61.36	56.93	68.20	-11.27 peak


802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

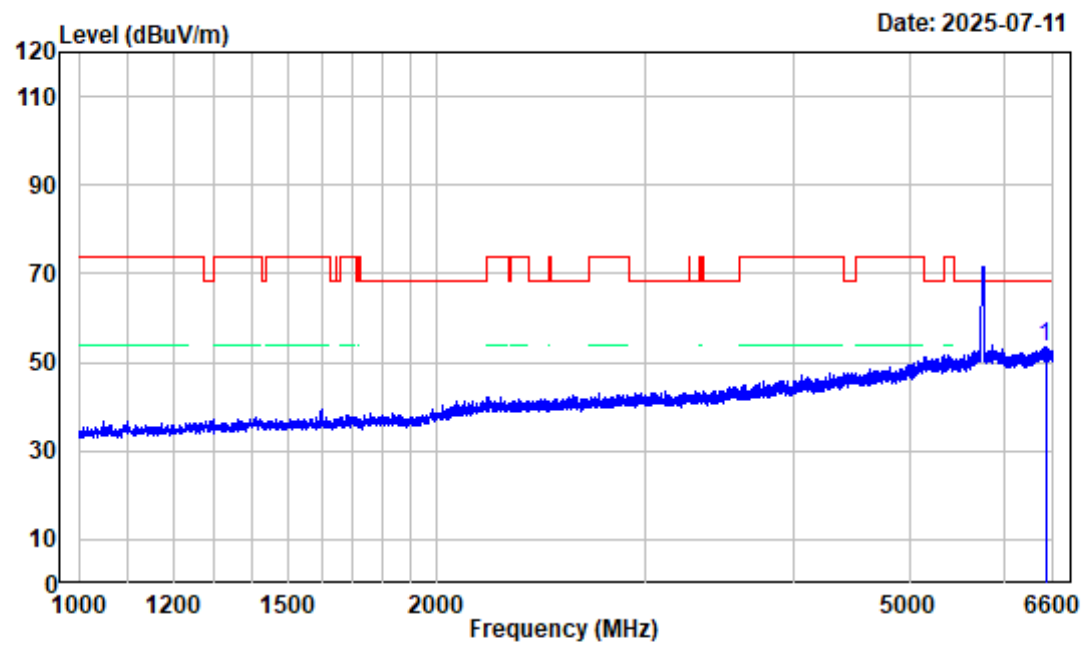

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6504.100	-3.81	57.23	53.42	68.20	-14.78 peak


802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

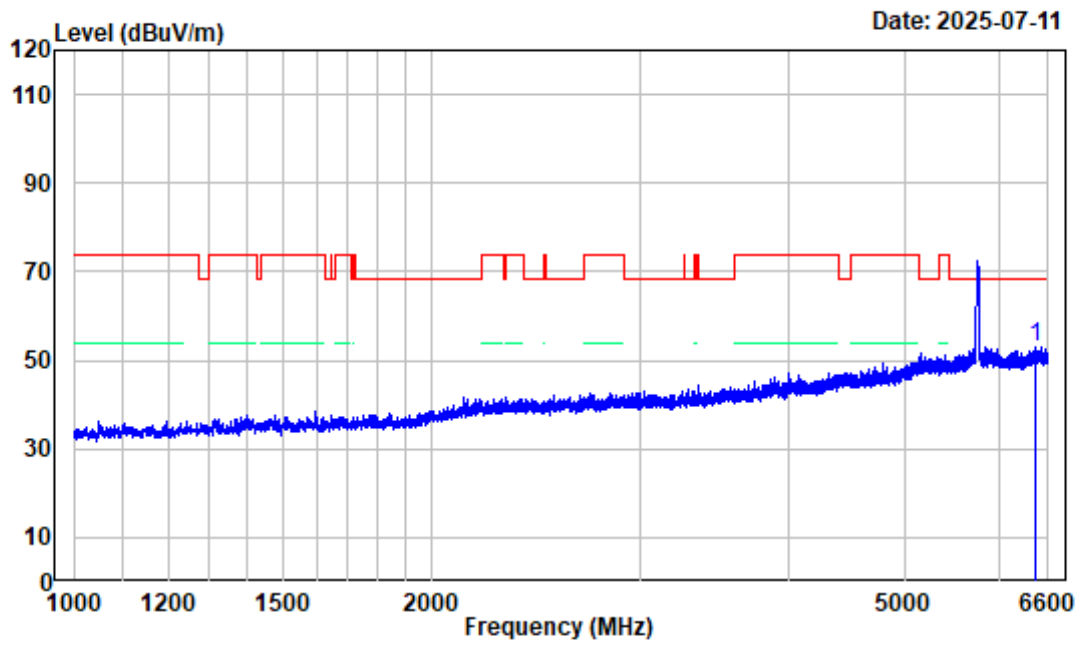

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6448.100	-3.61	56.61	53.00	68.20	-15.20 peak


802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

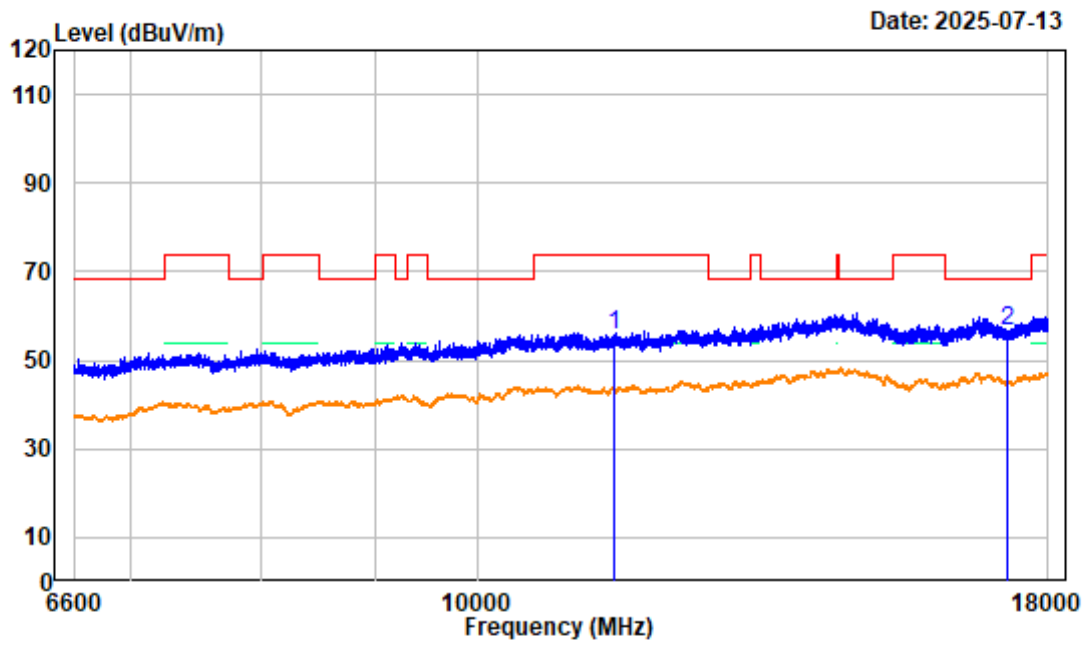

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5755MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11510.000	6.30	49.23	55.53	74.00	-18.47	peak
2 17265.000	6.67	50.02	56.69	68.20	-11.51	peak


802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

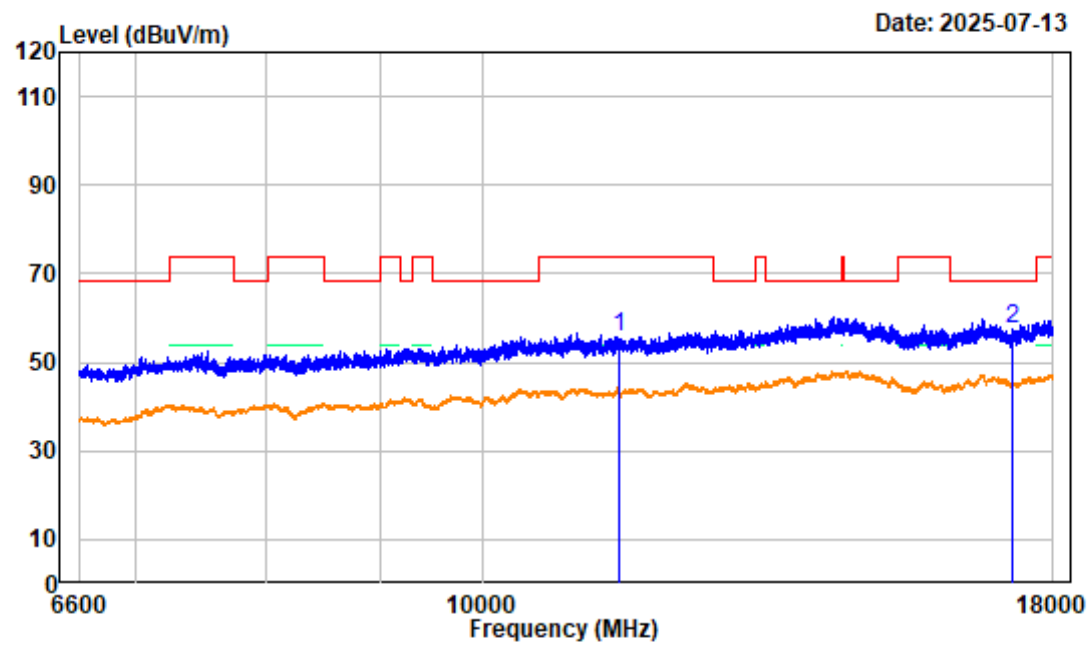

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5755MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11510.000	6.30	49.52	55.82	74.00	-18.18	peak
2 17265.000	6.67	50.71	57.38	68.20	-10.82	peak


802.11AC40 Low Channel Bandedge_HORIZONTAL

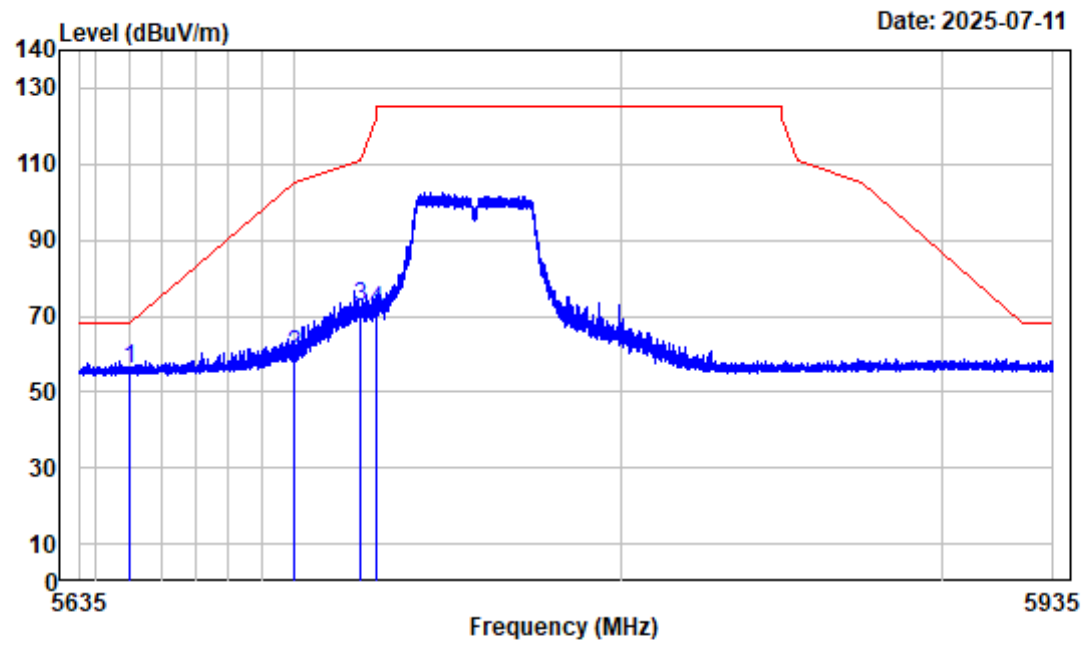

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5755MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.74	55.90	68.20	-12.30	peak
2	5700.000	-4.41	63.99	59.58	105.20	-45.62	peak
3	5720.000	-4.44	77.05	72.61	110.80	-38.19	peak
4	5725.000	-4.46	75.73	71.27	122.20	-50.93	peak


802.11AC40 Low Channel Bandedge_VERTICAL

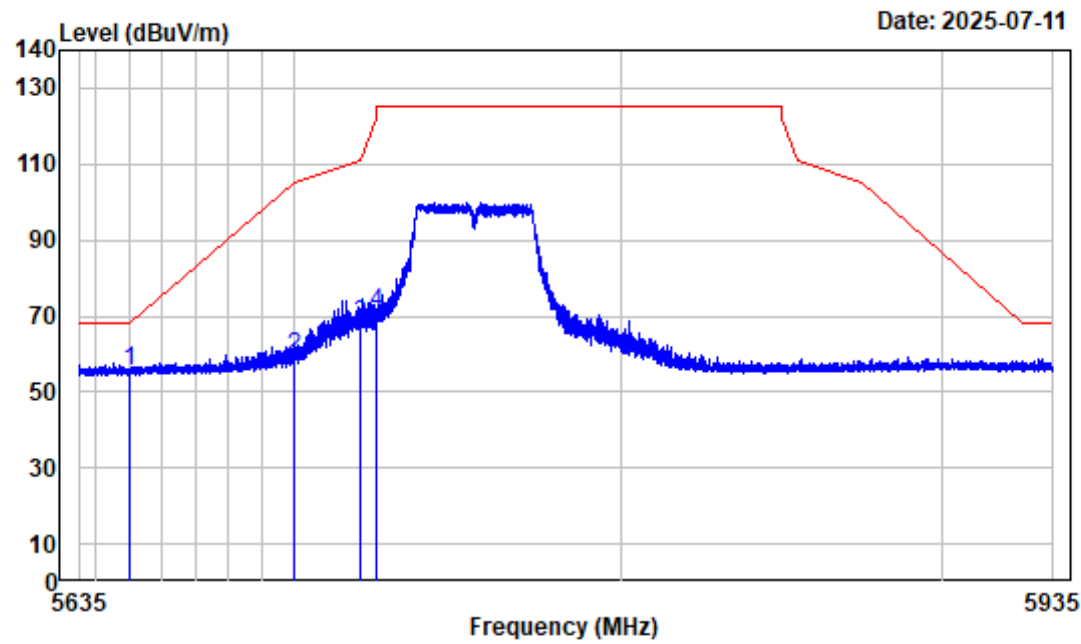

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5755MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.40	55.56	68.20	-12.64 peak
2	5700.000	-4.41	63.73	59.32	105.20	-45.88 peak
3	5720.000	-4.44	72.01	67.57	110.80	-43.23 peak
4	5725.000	-4.46	75.25	70.79	122.20	-51.41 peak


802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

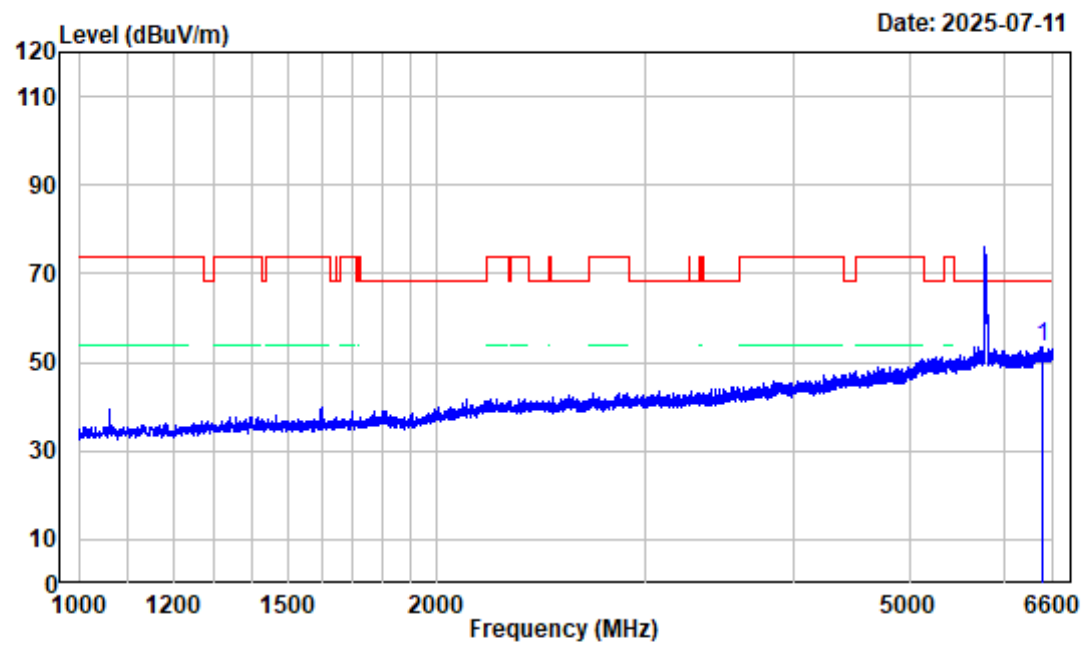

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6463.500	-3.67	57.04	53.37	68.20	-14.83	peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

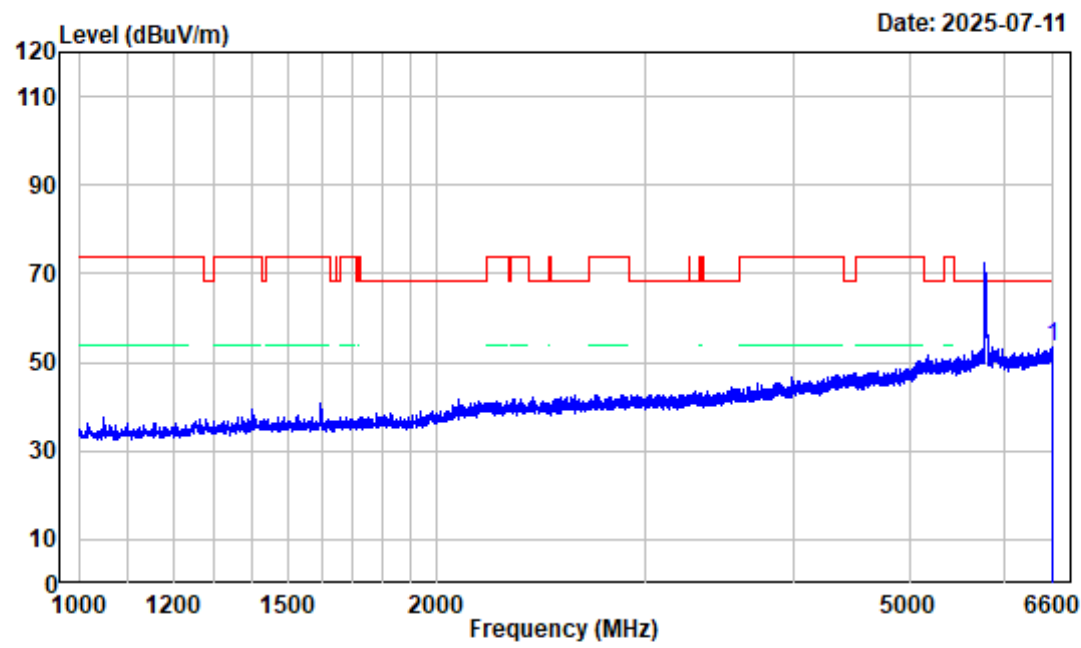

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6590.900	-3.57	56.79	53.22	68.20	-14.98 peak

802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

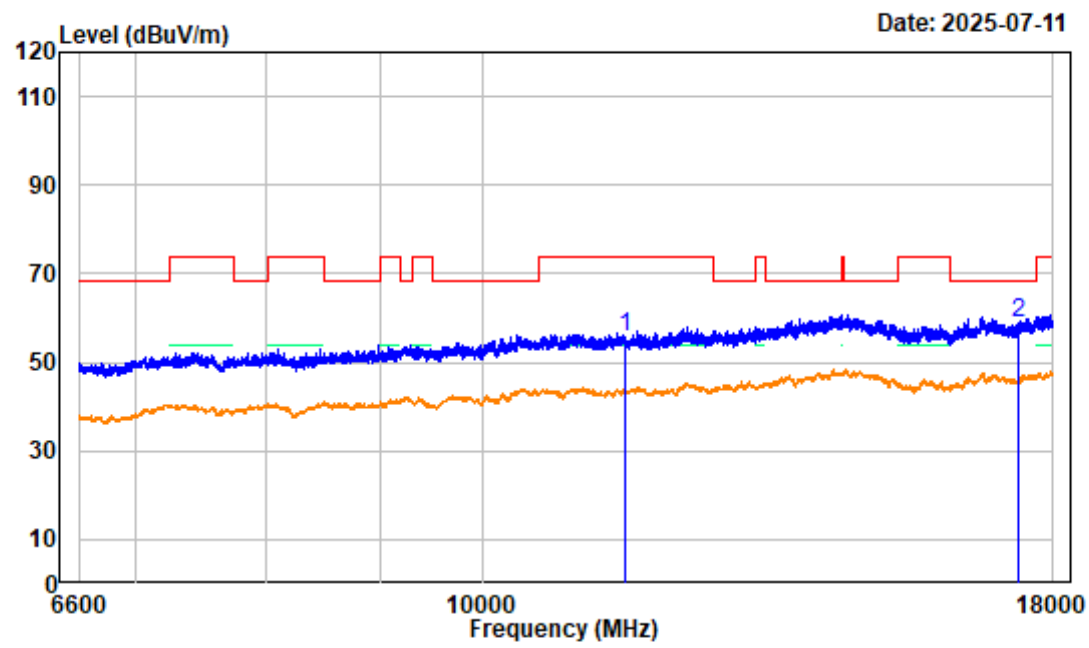

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AC40 High Channel 5795MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.77	49.92	55.69	74.00	-18.31 peak
2	17385.000	6.76	51.90	58.66	68.20	-9.54 peak


802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

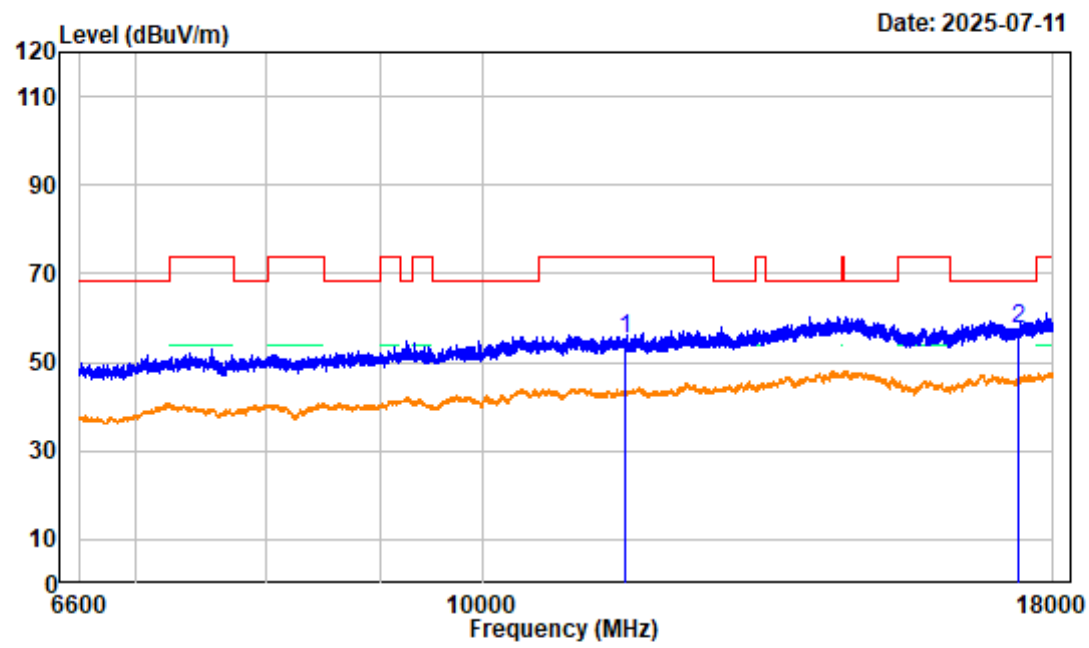

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5795MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	5.77	49.50	55.27	74.00	-18.73	peak
2 17385.000	6.76	50.82	57.58	68.20	-10.62	peak


802.11AC40 High Channel Bandedge_HORIZONTAL

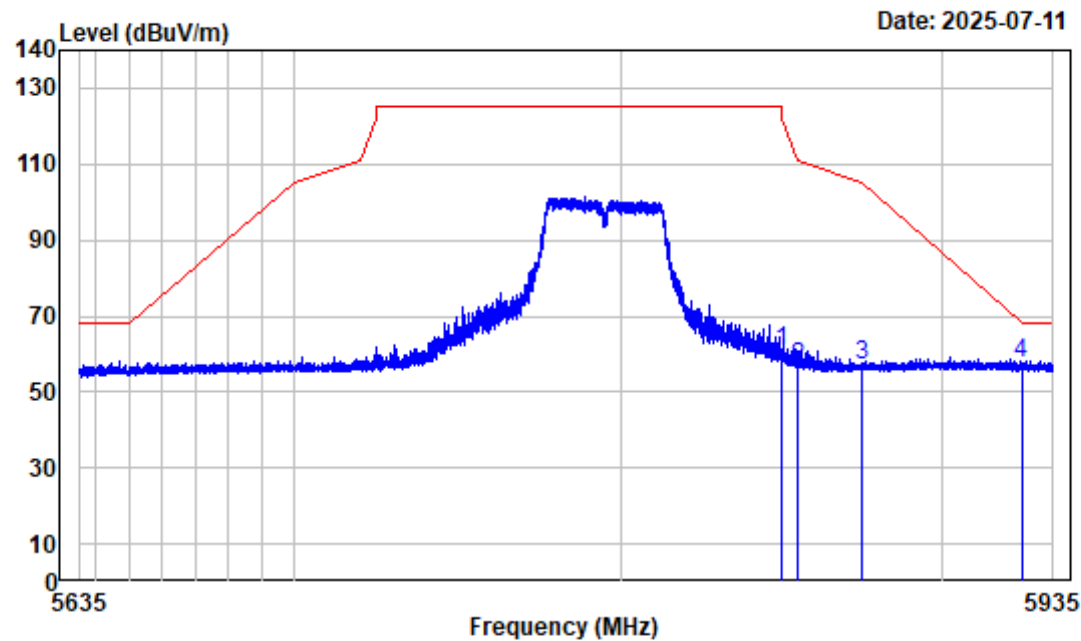

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5795MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	65.10	60.57	122.20	-61.63 peak
2	5855.000	-4.48	61.27	56.79	110.80	-54.01 peak
3	5875.000	-4.28	61.10	56.82	105.20	-48.38 peak
4	5925.000	-4.43	61.79	57.36	68.20	-10.84 peak


802.11AC40 High Channel Bandedge_VERTICAL

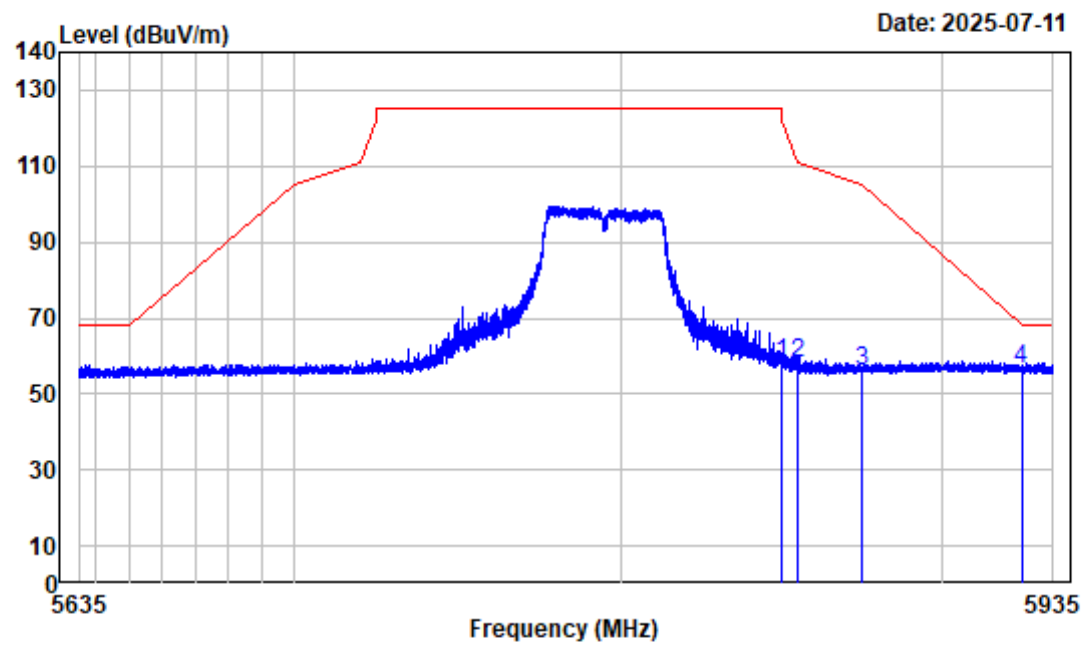

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5795MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5850.000	-4.53	62.70	58.17	122.20	-64.03	peak
2 5855.000	-4.48	62.52	58.04	110.80	-52.76	peak
3 5875.000	-4.28	60.19	55.91	105.20	-49.29	peak
4 5925.000	-4.43	60.75	56.32	68.20	-11.88	peak


802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

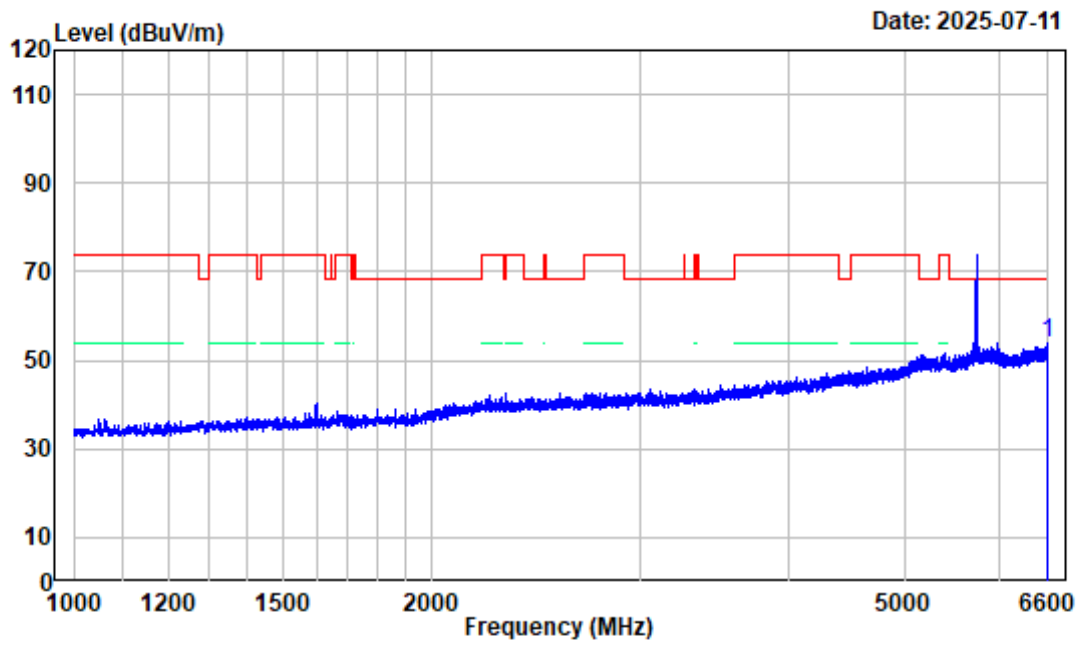

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6596.500	-3.55	57.46	53.91	68.20	-14.29 peak


802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

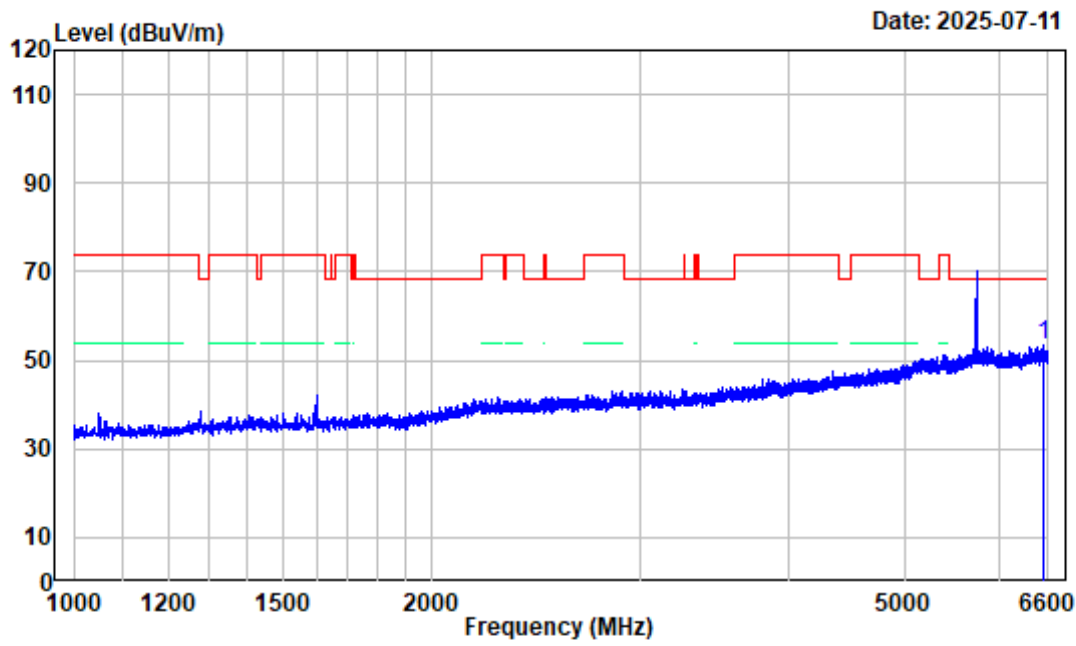

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6553.100	-3.71	57.05	53.34	68.20	-14.86 peak


802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

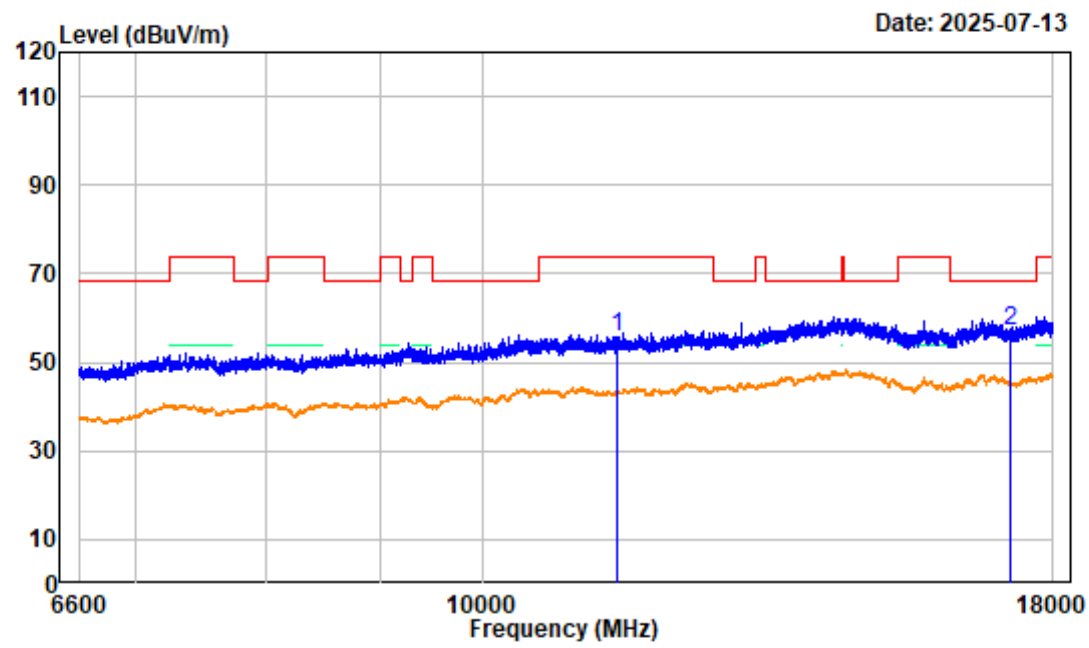

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.000	6.10	49.79	55.89	74.00	-18.11	peak
2 17235.000	6.76	50.29	57.05	68.20	-11.15	peak


802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

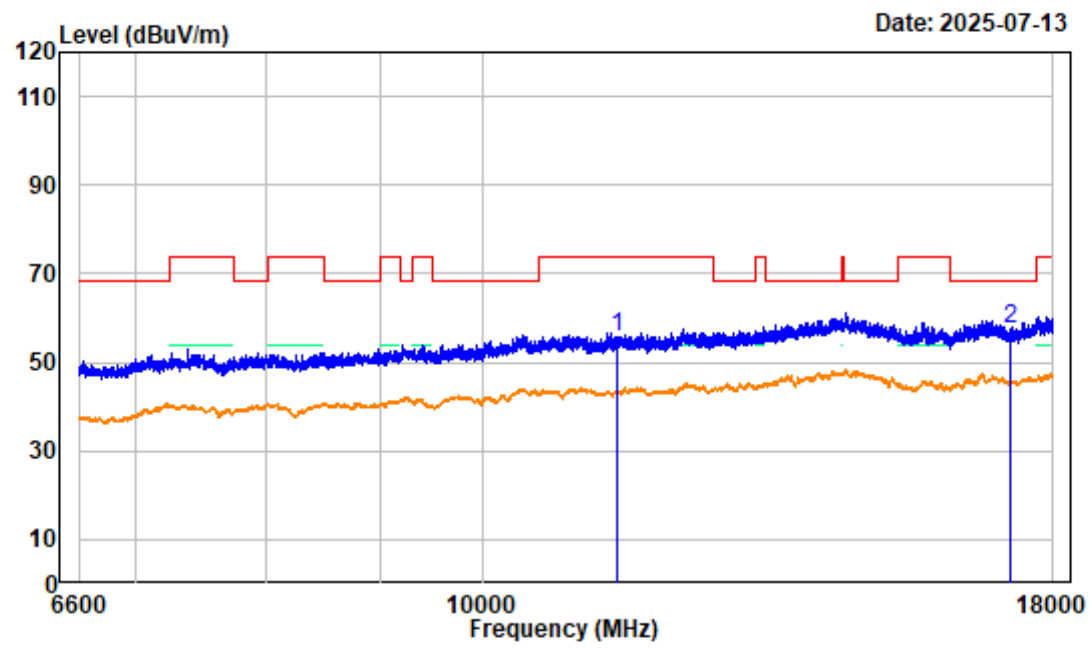

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11490.000	6.10	49.82	55.92	74.00	-18.08	peak
2 17235.000	6.76	50.68	57.44	68.20	-10.76	peak


802.11AX20 Low Channel Bandedge_HORIZONTAL

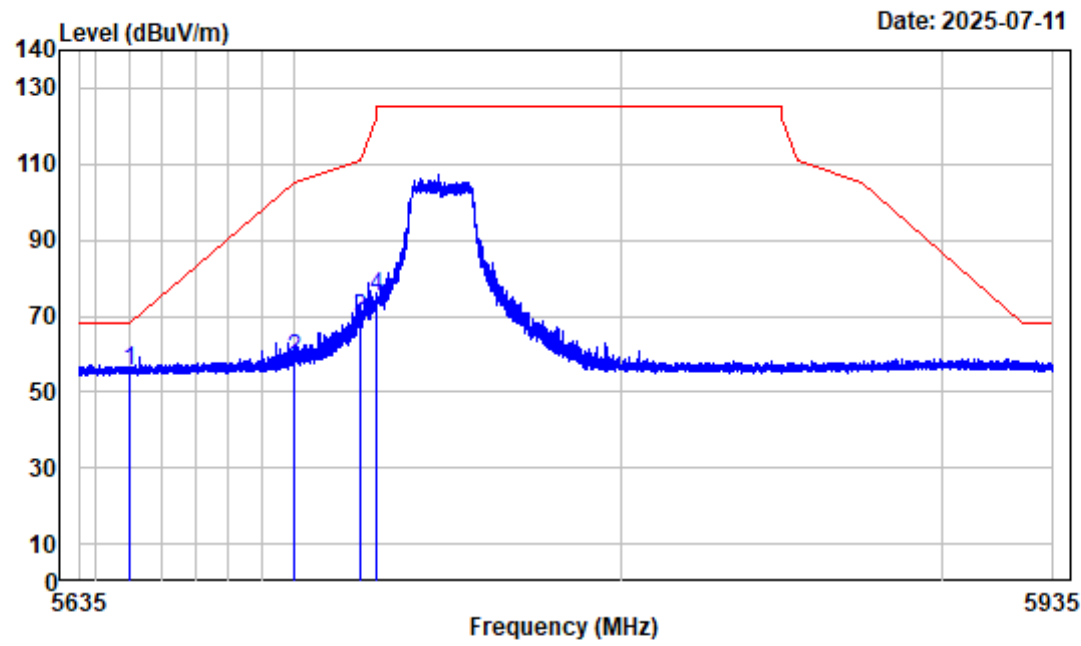

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.28	55.44	68.20	-12.76 peak
2	5700.000	-4.41	63.03	58.62	105.20	-46.58 peak
3	5720.000	-4.44	73.58	69.14	110.80	-41.66 peak
4	5725.000	-4.46	79.49	75.03	122.20	-47.17 peak


802.11AX20 Low Channel Bandedge_VERTICAL

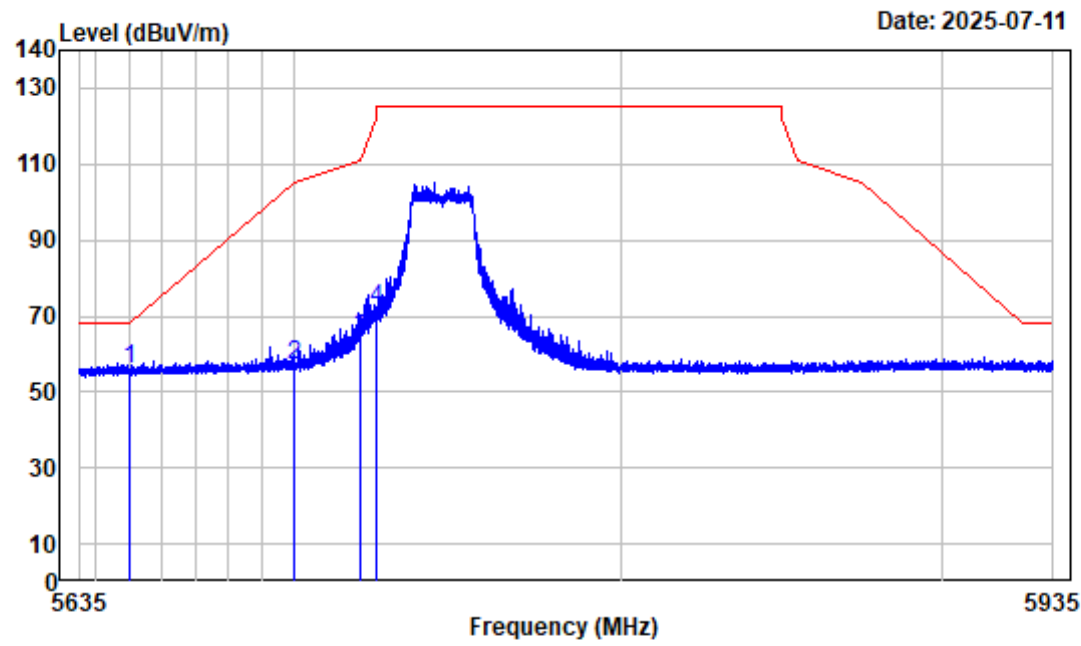

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.76	55.92	68.20	-12.28	peak
2	5700.000	-4.41	61.36	56.95	105.20	-48.25	peak
3	5720.000	-4.44	68.20	63.76	110.80	-47.04	peak
4	5725.000	-4.46	76.05	71.59	122.20	-50.61	peak

802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

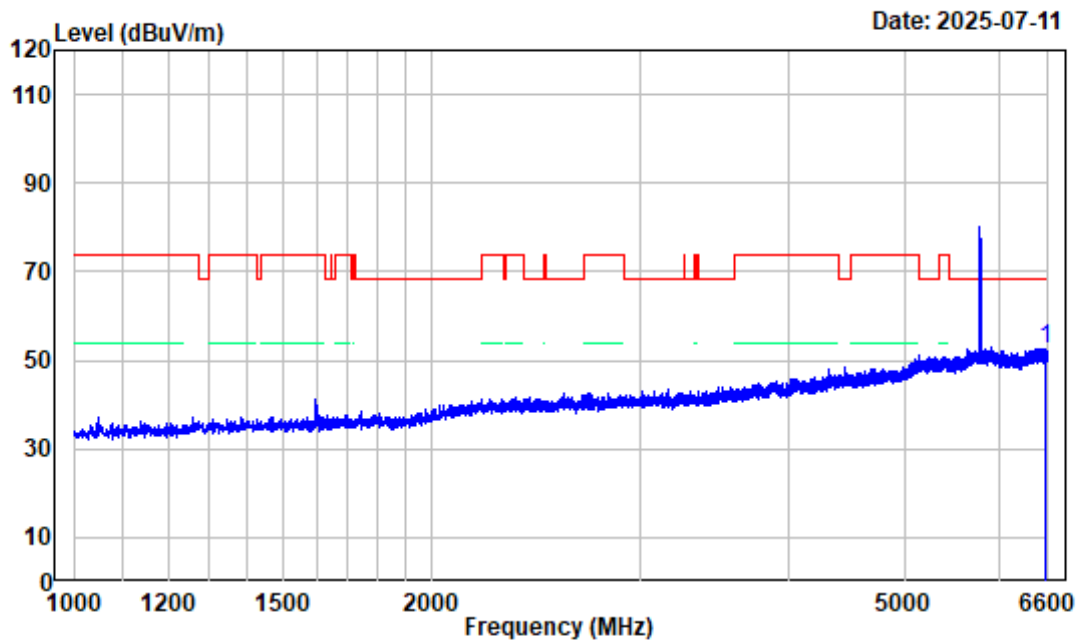

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX20 Middle Channel 5785MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6577.600	-3.62	56.25	52.63	68.20	-15.57 peak


802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

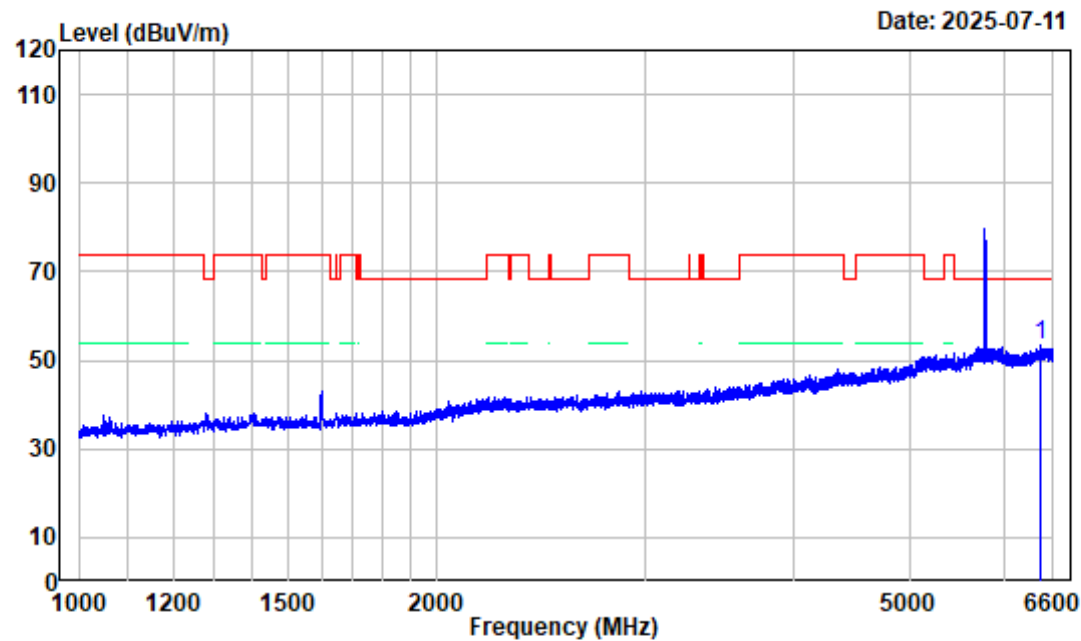

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5785MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6432.700	-3.63	57.17	53.54	68.20	-14.66 peak

802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

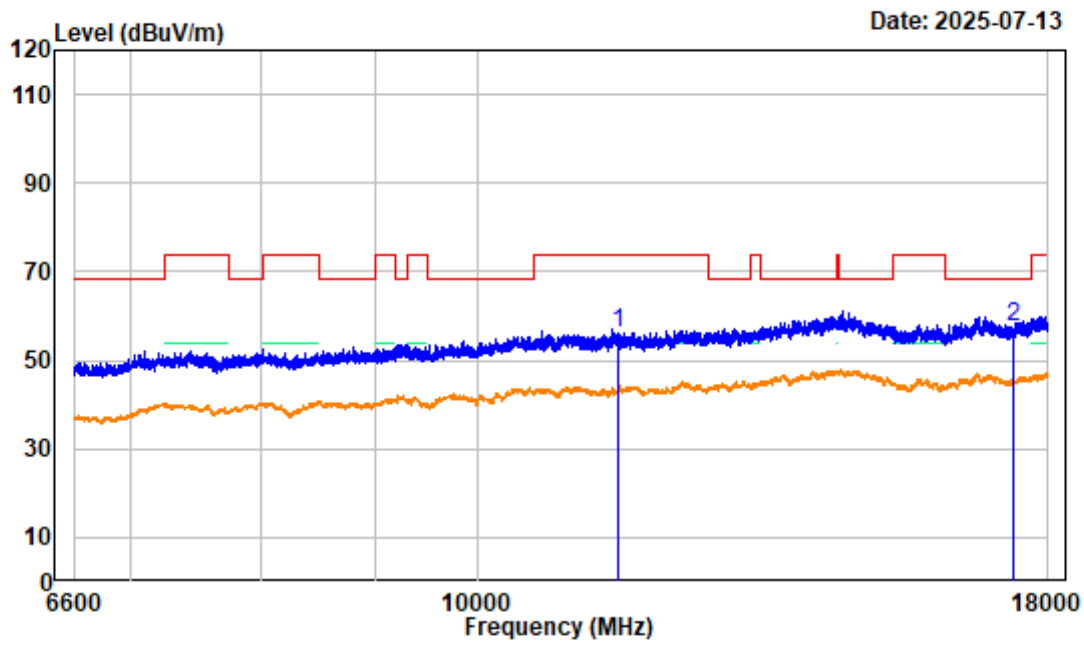

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504V06524E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11AX20 Middle Channel 5785MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.000	5.93	50.44	56.37	74.00	-17.63	peak
2 17355.000	6.58	51.11	57.69	68.20	-10.51	peak


802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

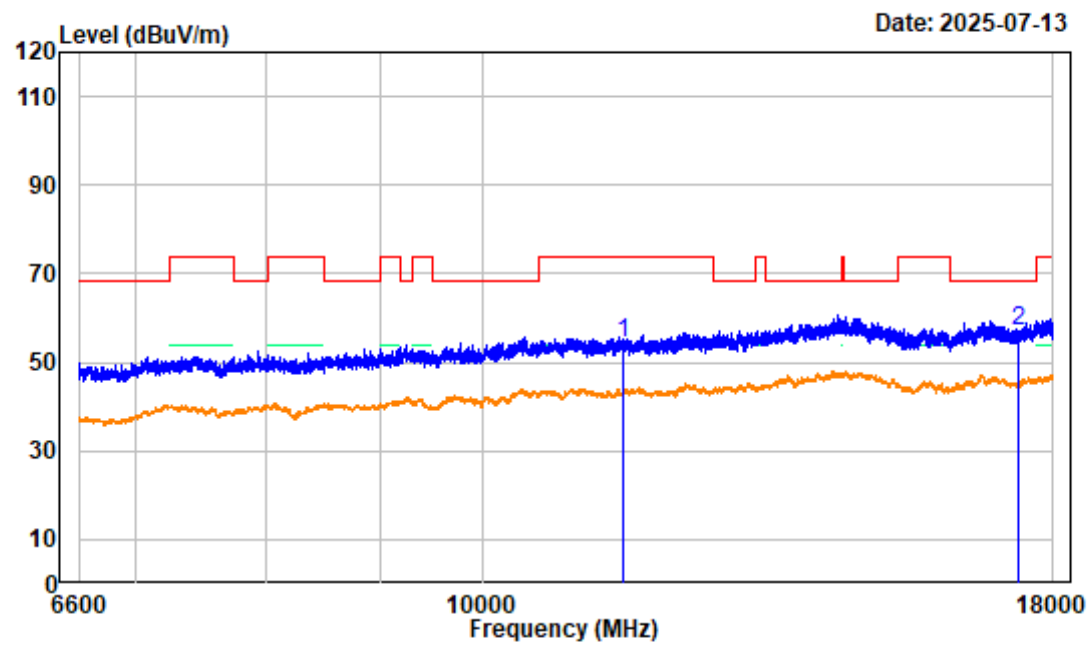

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5785MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11570.000	5.93	48.44	54.37	74.00	-19.63	peak
2 17355.000	6.58	50.56	57.14	68.20	-11.06	peak


802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

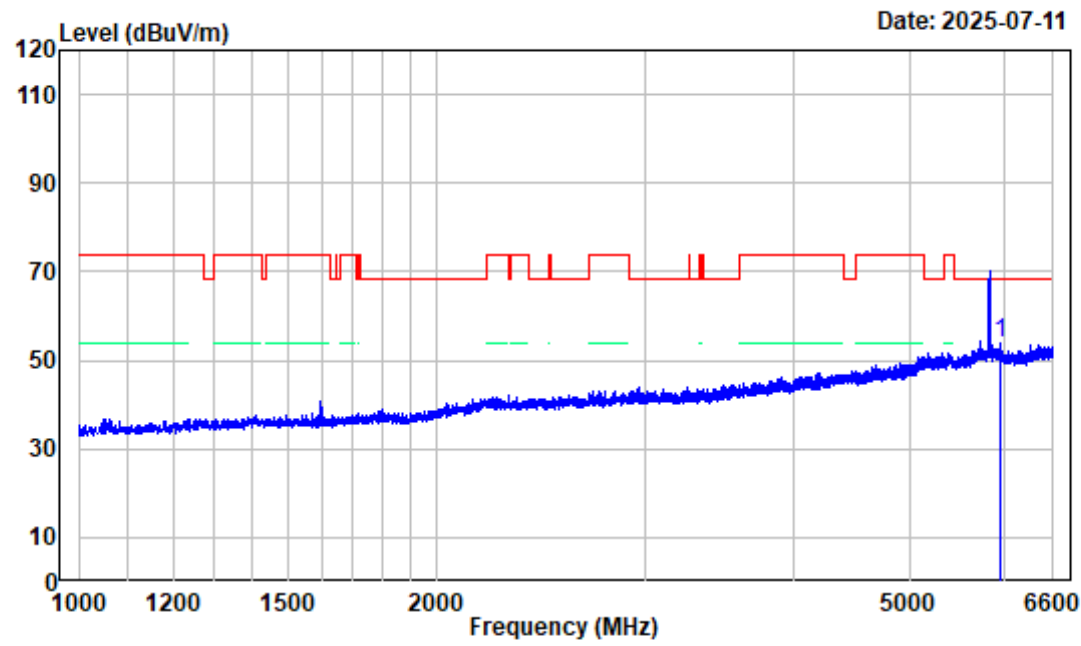

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5953.200	-4.82	58.52	53.70	68.20	-14.50	peak


802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

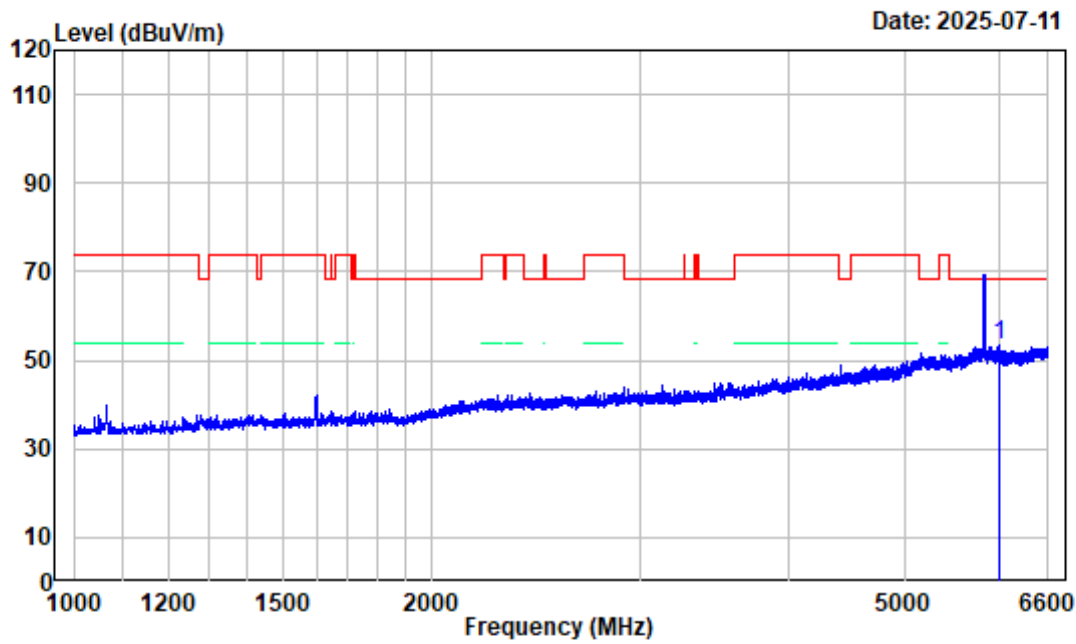

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5825MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6000.100	-4.92	58.25	53.33	68.20	-14.87 peak


802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

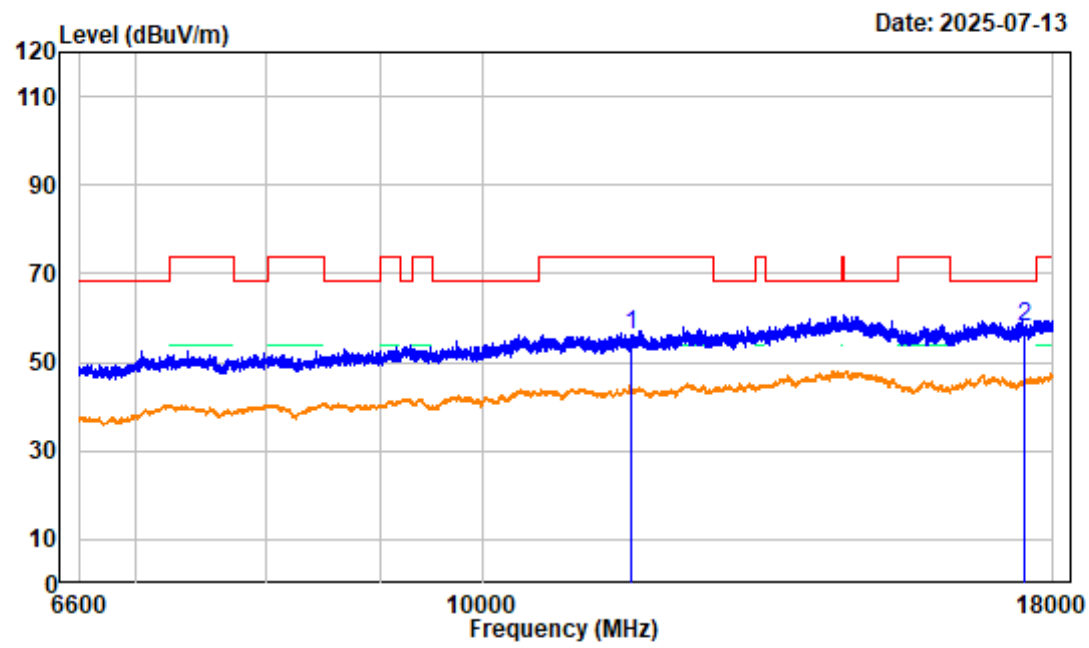

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	5.37	50.64	56.01	74.00	-17.99	peak
2 17475.000	7.12	50.72	57.84	68.20	-10.36	peak


802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

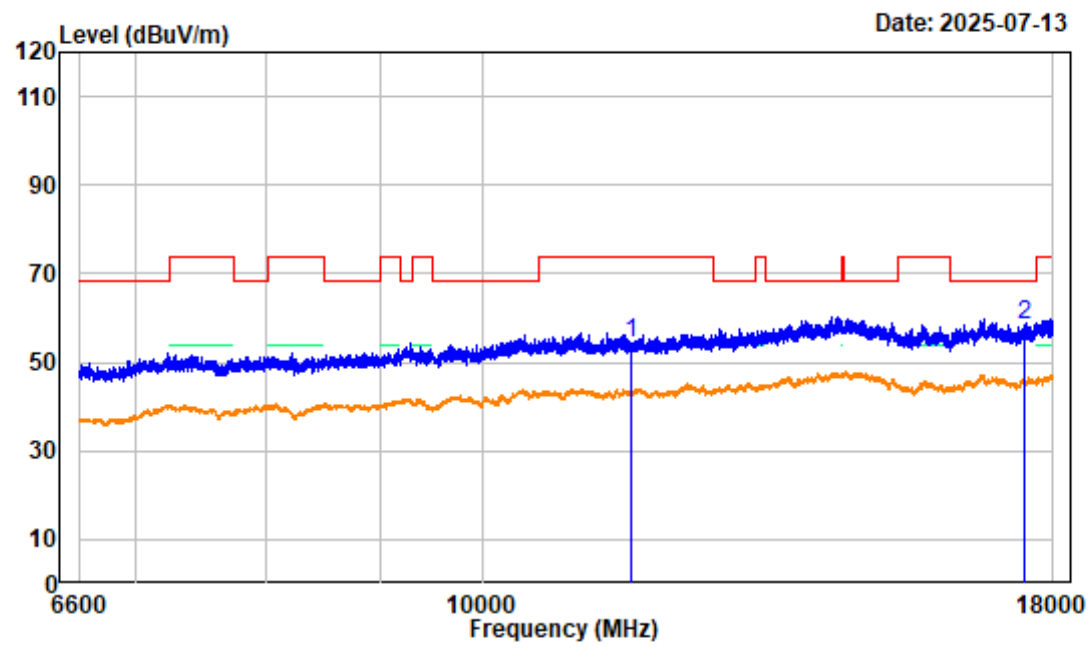

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5825MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	5.37	48.98	54.35	74.00	-19.65	peak
2 17475.000	7.12	51.14	58.26	68.20	-9.94	peak


802.11AX20 High Channel Bandedge_HORIZONTAL

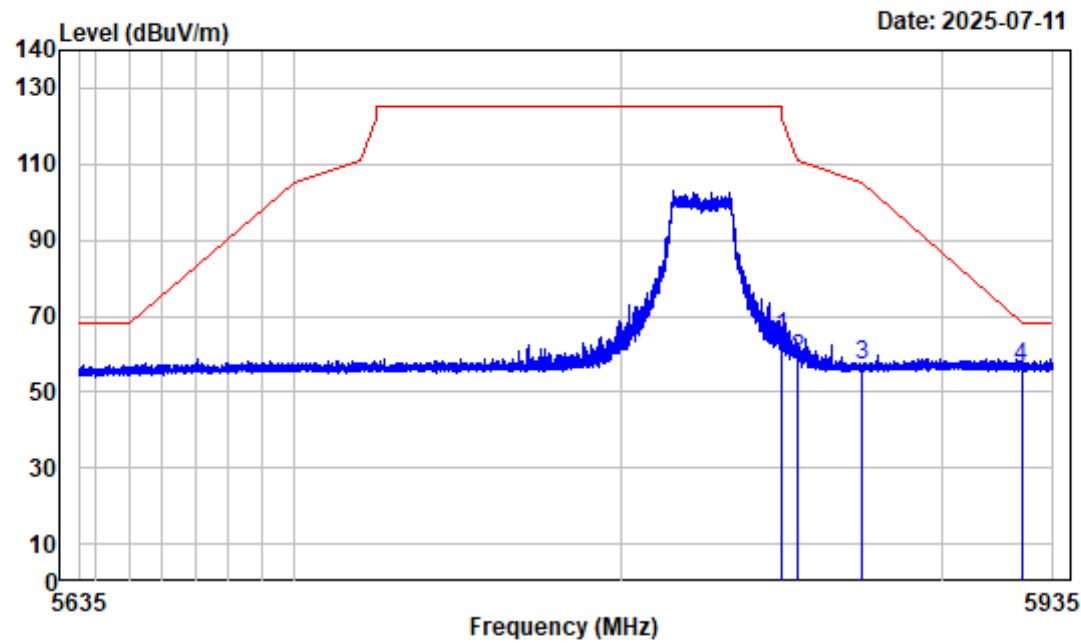

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5825MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	69.18	64.65	122.20	-57.55 peak
2	5855.000	-4.48	63.34	58.86	110.80	-51.94 peak
3	5875.000	-4.28	61.30	57.02	105.20	-48.18 peak
4	5925.000	-4.43	60.92	56.49	68.20	-11.71 peak


802.11AX20 High Channel Bandedge_VERTICAL

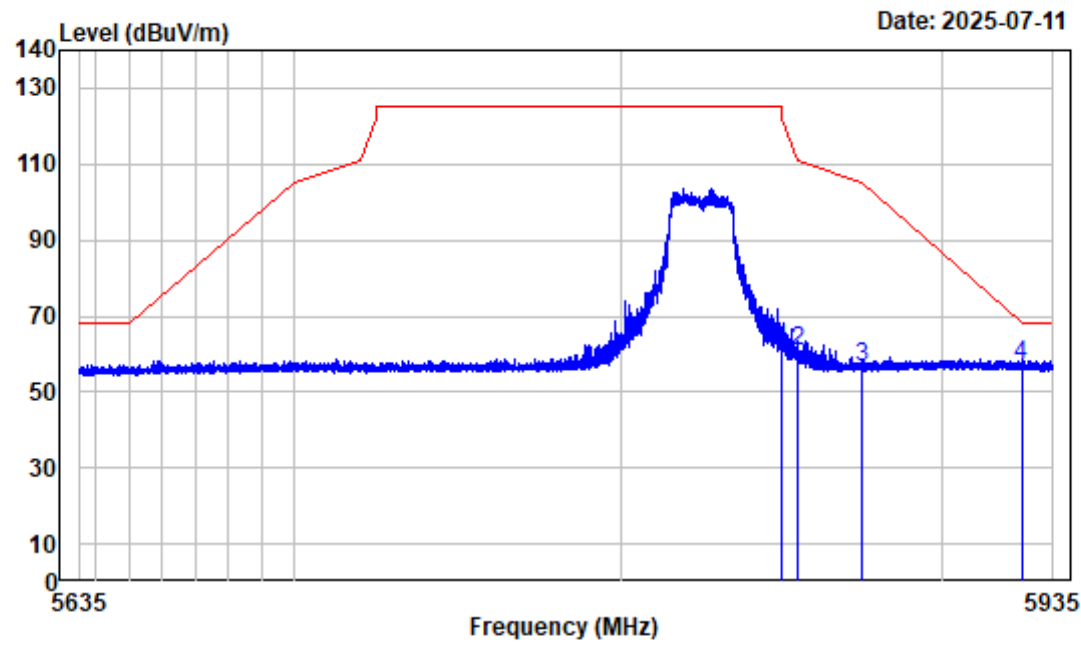

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5825MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	65.85	61.32	122.20	-60.88	peak
2	5855.000	-4.48	65.48	61.00	110.80	-49.80	peak
3	5875.000	-4.28	60.86	56.58	105.20	-48.62	peak
4	5925.000	-4.43	61.56	57.13	68.20	-11.07	peak


802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

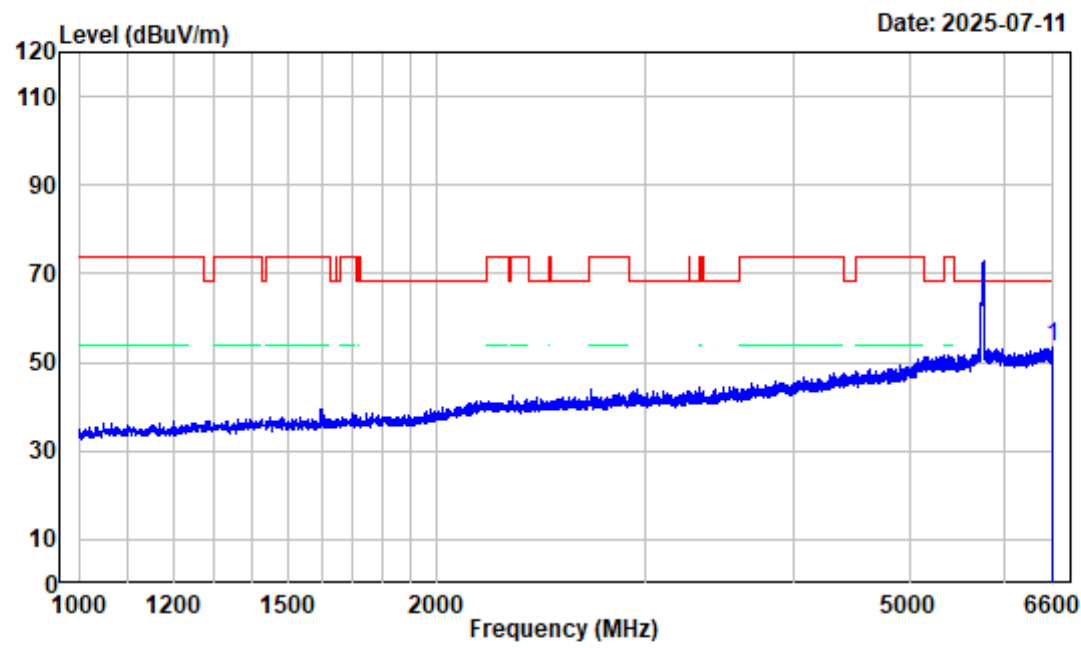

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6588.100	-3.58	57.07	53.49	68.20	-14.71 peak


802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

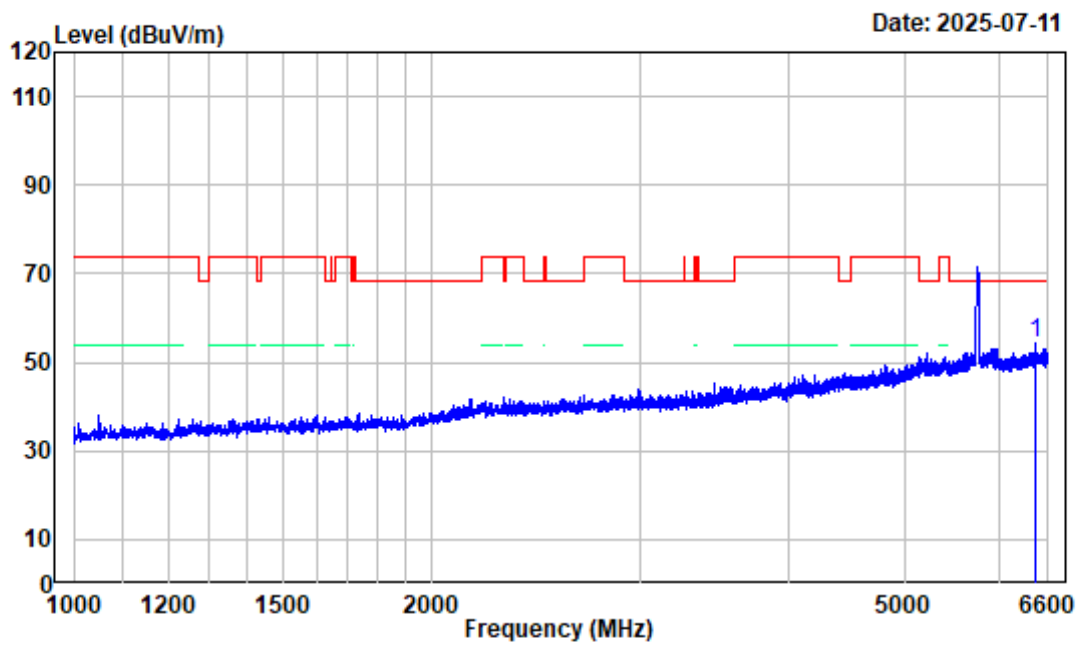

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5755MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6438.300	-3.63	57.78	54.15	68.20	-14.05 peak


802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

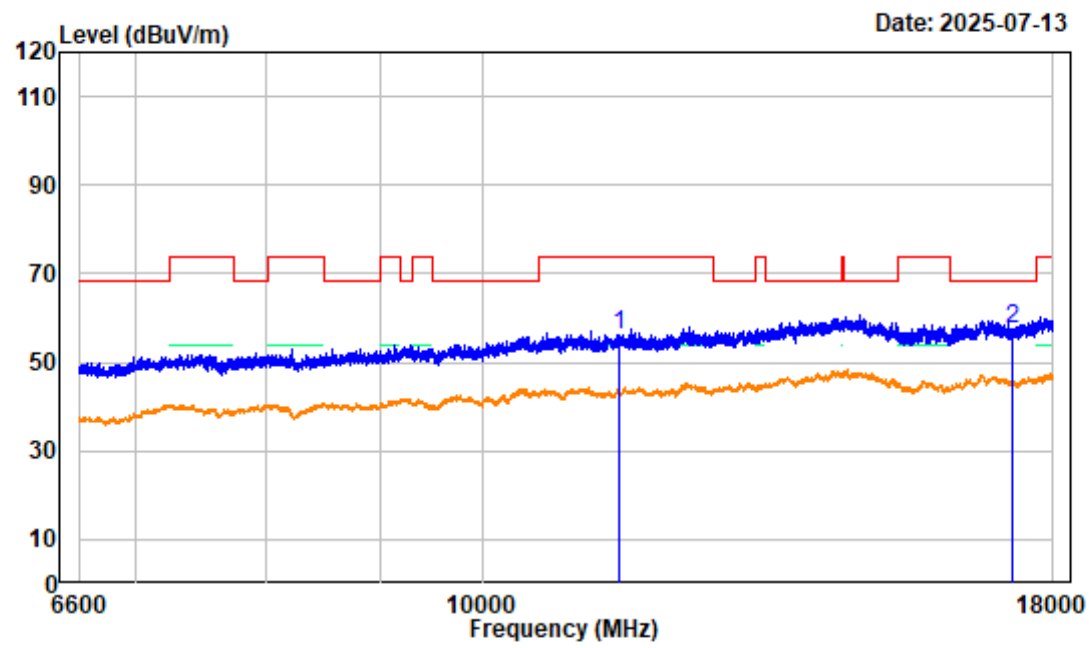

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5755MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11510.000	6.30	49.78	56.08	74.00	-17.92	peak
2 17265.000	6.67	50.89	57.56	68.20	-10.64	peak


802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

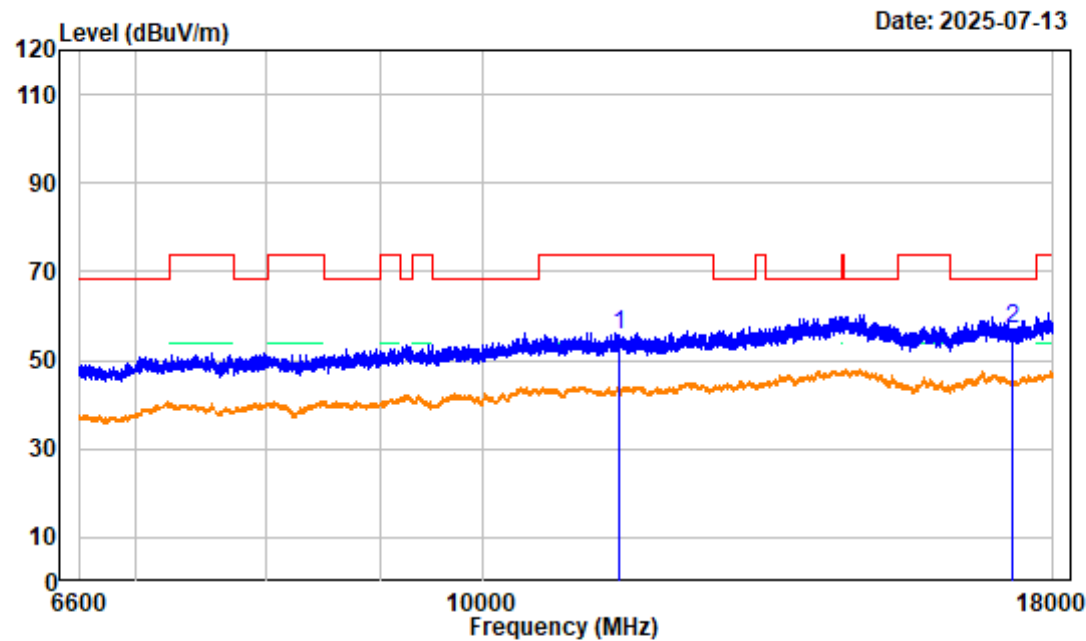

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5755MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11510.000	6.30	49.50	55.80	74.00	-18.20	peak
2 17265.000	6.67	50.48	57.15	68.20	-11.05	peak


802.11AX40 Low Channel Bandedge_HORIZONTAL

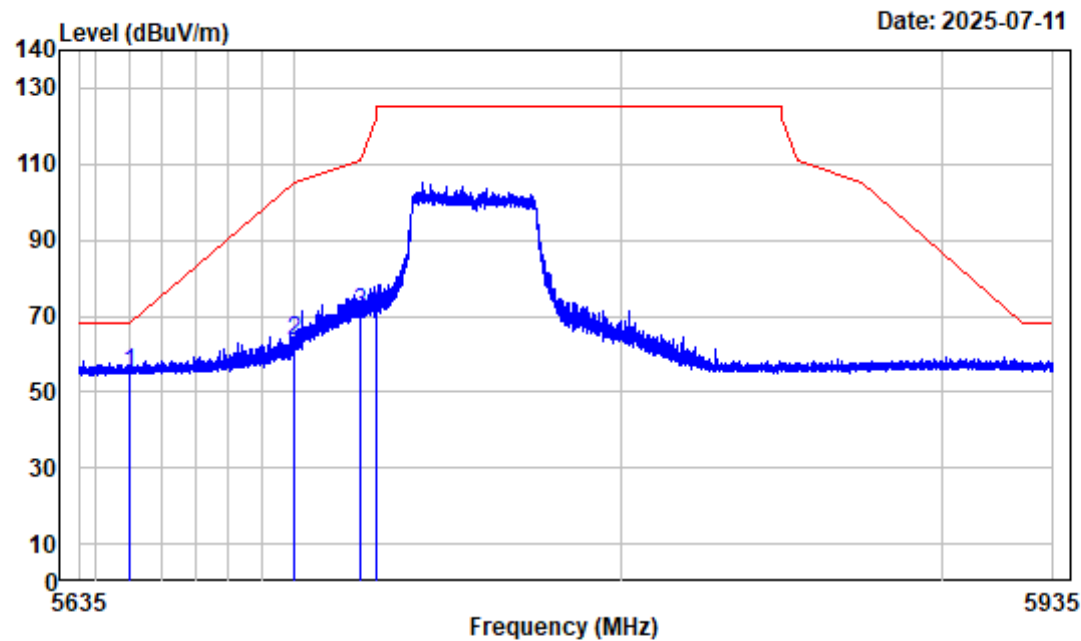

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5755MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	59.89	55.05	68.20	-13.15	peak
2	5700.000	-4.41	67.77	63.36	105.20	-41.84	peak
3	5720.000	-4.44	75.36	70.92	110.80	-39.88	peak
4	5725.000	-4.46	75.42	70.96	122.20	-51.24	peak


802.11AX40 Low Channel Bandedge_VERTICAL

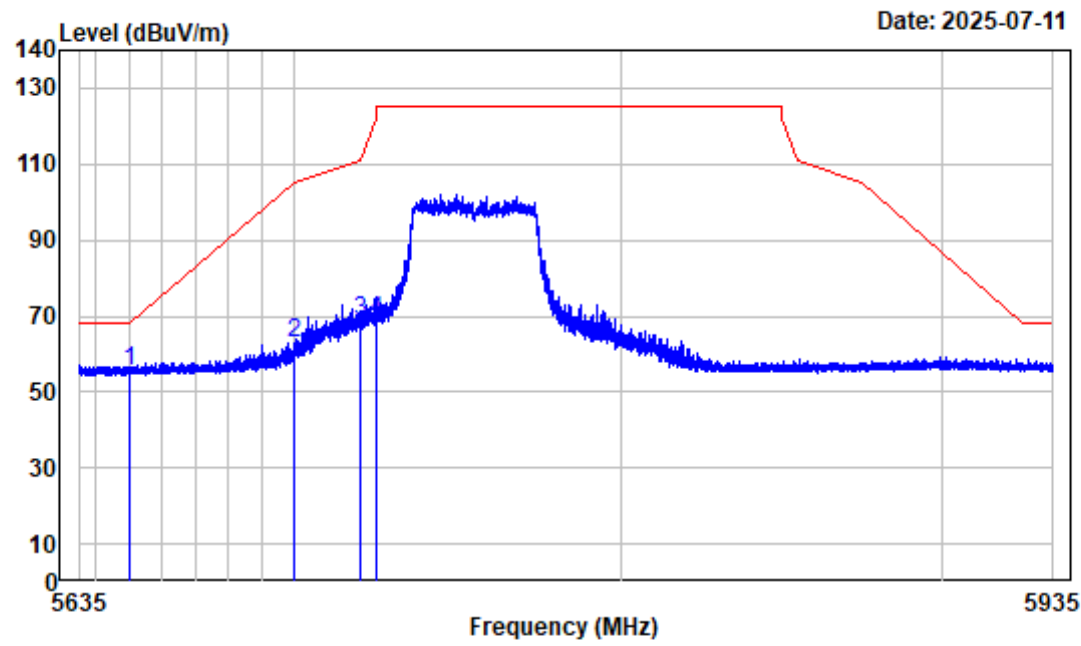

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 Low Channel 5755MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.84	60.36	55.52	68.20	-12.68	peak
2	5700.000	-4.41	67.47	63.06	105.20	-42.14	peak
3	5720.000	-4.44	73.12	68.68	110.80	-42.12	peak
4	5725.000	-4.46	73.40	68.94	122.20	-53.26	peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

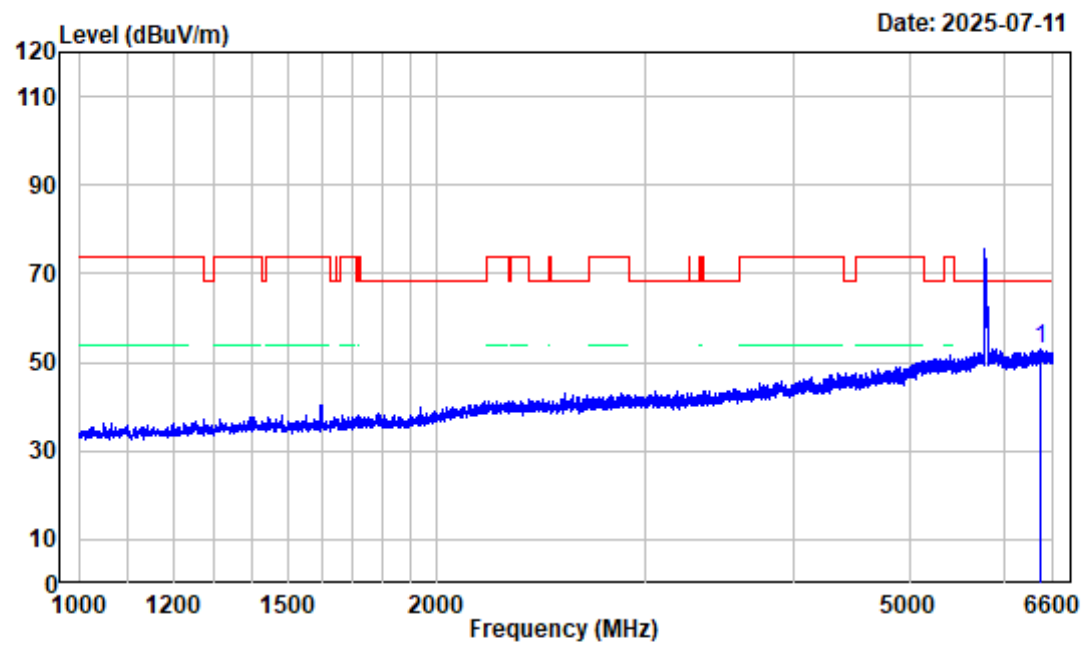

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6437.600	-3.63	56.72	53.09	68.20	-15.11 peak


802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

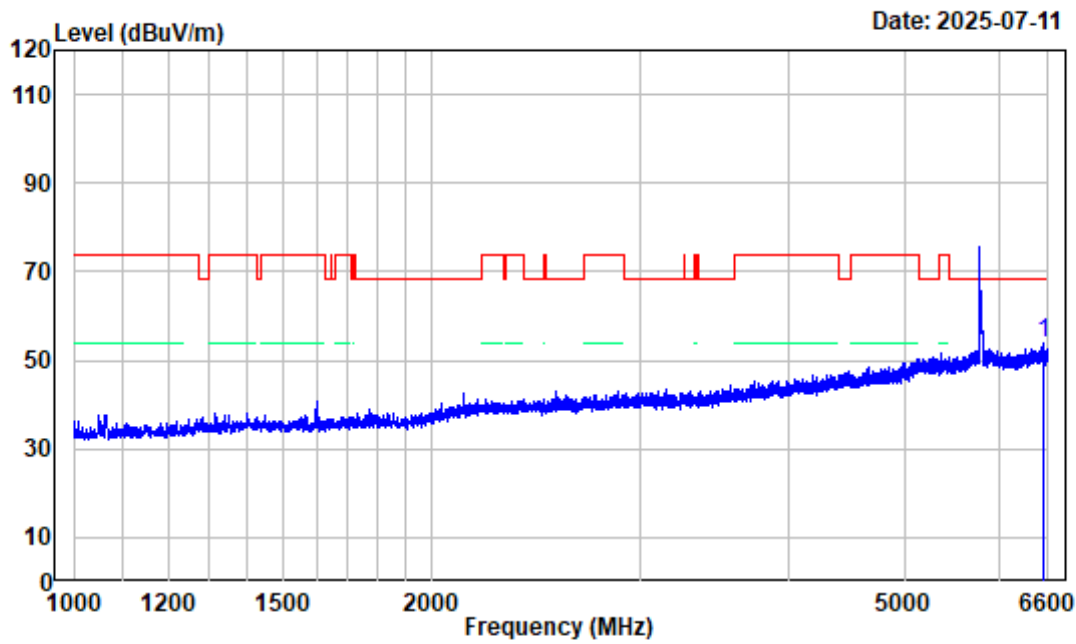

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5795MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6548.200	-3.72	57.40	53.68	68.20	-14.52 peak


802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

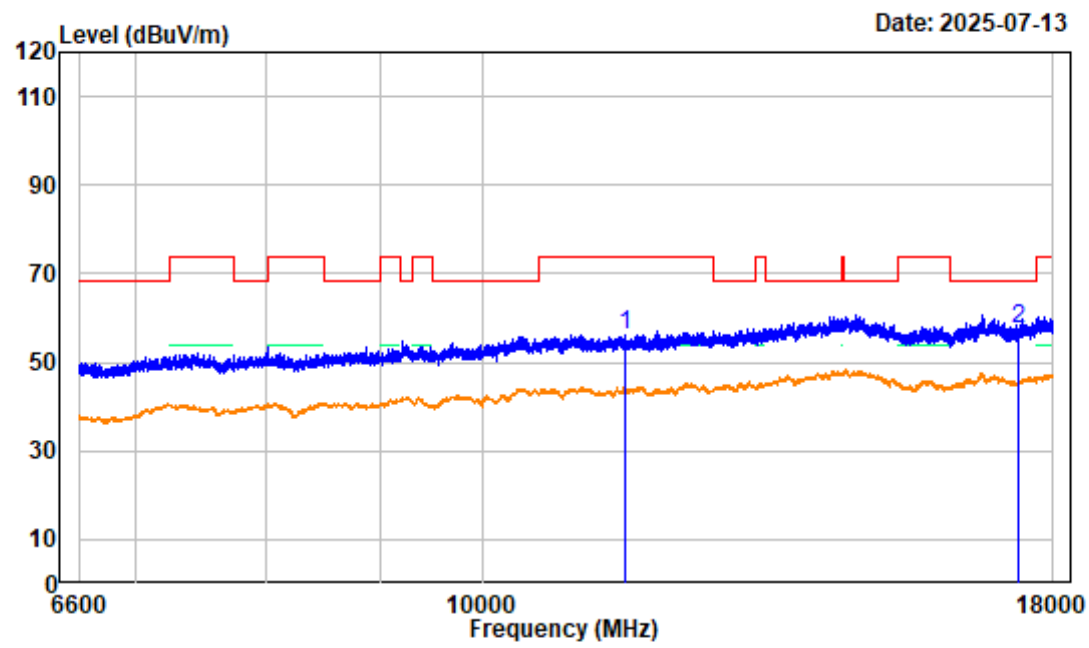

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5795MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	5.77	50.31	56.08	74.00	-17.92	peak
2 17385.000	6.76	50.95	57.71	68.20	-10.49	peak


802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

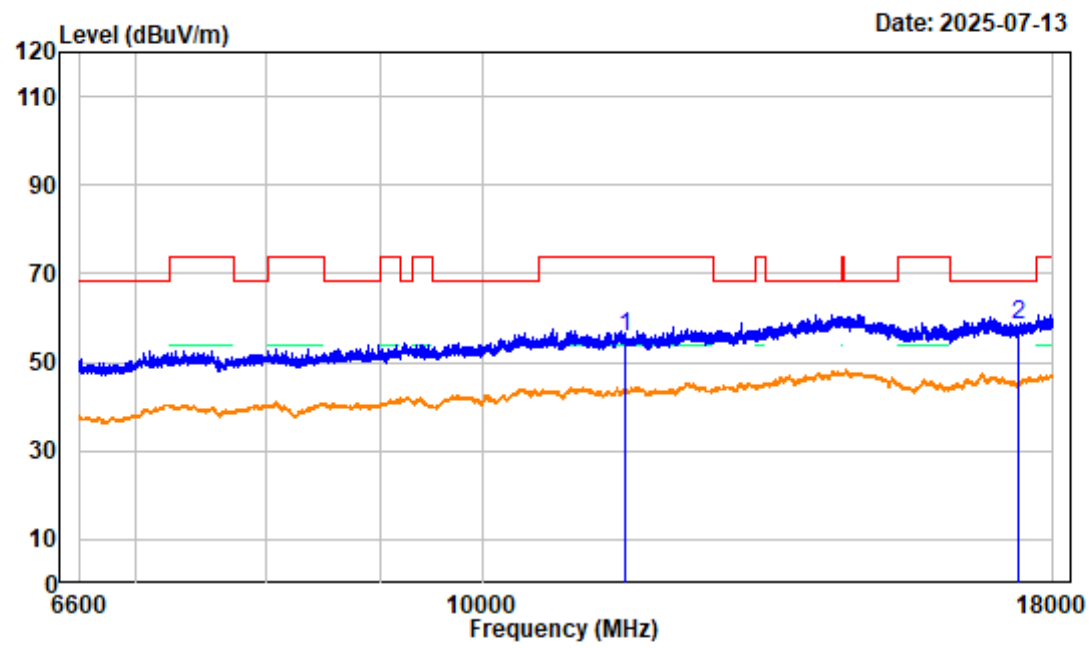

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5795MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	5.77	49.97	55.74	74.00	-18.26	peak
2 17385.000	6.76	51.44	58.20	68.20	-10.00	peak


802.11AX40 High Channel Bandedge_HORIZONTAL

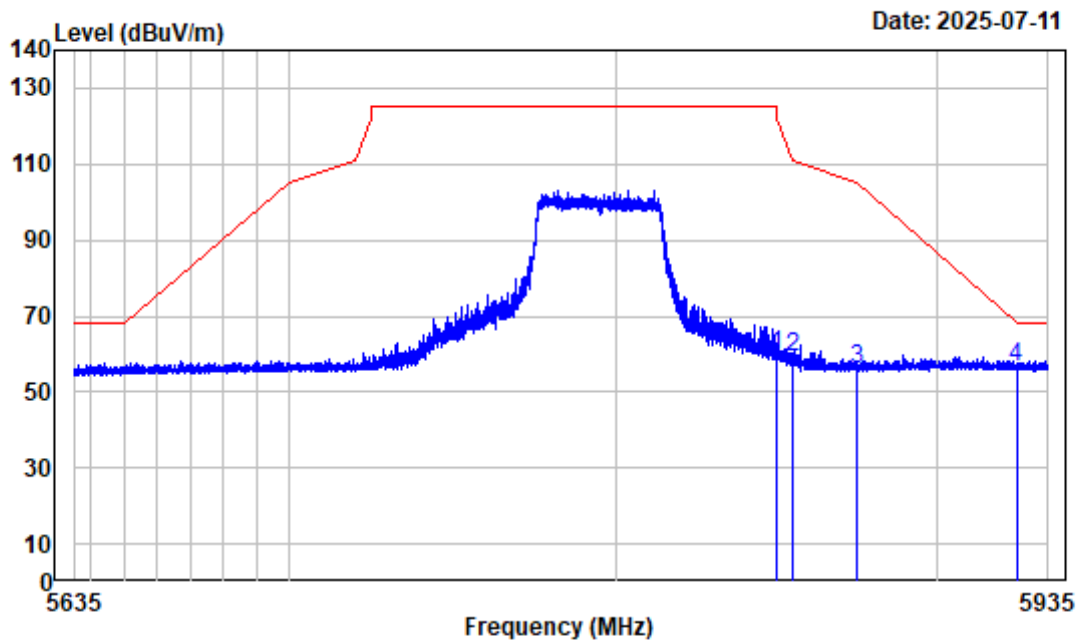

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5795MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	64.42	59.89	122.20	-62.31	peak
2	5855.000	-4.48	63.46	58.98	110.80	-51.82	peak
3	5875.000	-4.28	60.39	56.11	105.20	-49.09	peak
4	5925.000	-4.43	60.76	56.33	68.20	-11.87	peak

802.11AX40 High Channel Bandedge_VERTICAL

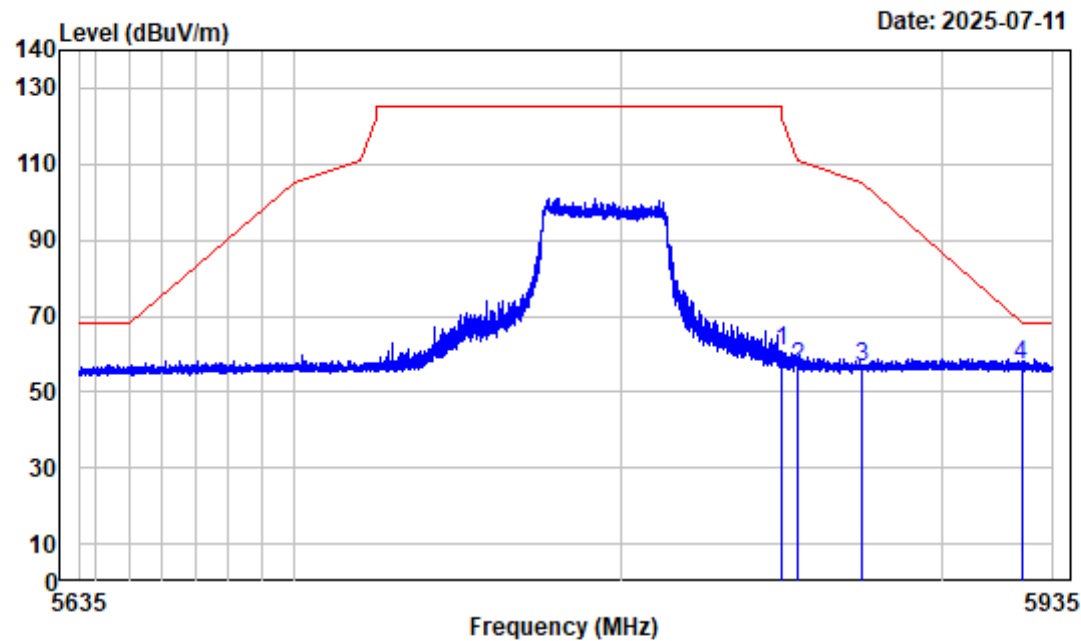

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504V06524E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX40 High Channel 5795MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.53	65.53	61.00	122.20	-61.20	peak
2	5855.000	-4.48	60.90	56.42	110.80	-54.38	peak
3	5875.000	-4.28	60.87	56.59	105.20	-48.61	peak
4	5925.000	-4.43	61.29	56.86	68.20	-11.34	peak