


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 36 of 72

Figure 30: The plots of 6dB Bandwidth, 802.11ax(HE20), 5745MHz
Test Plot of -6dB Bandwidth

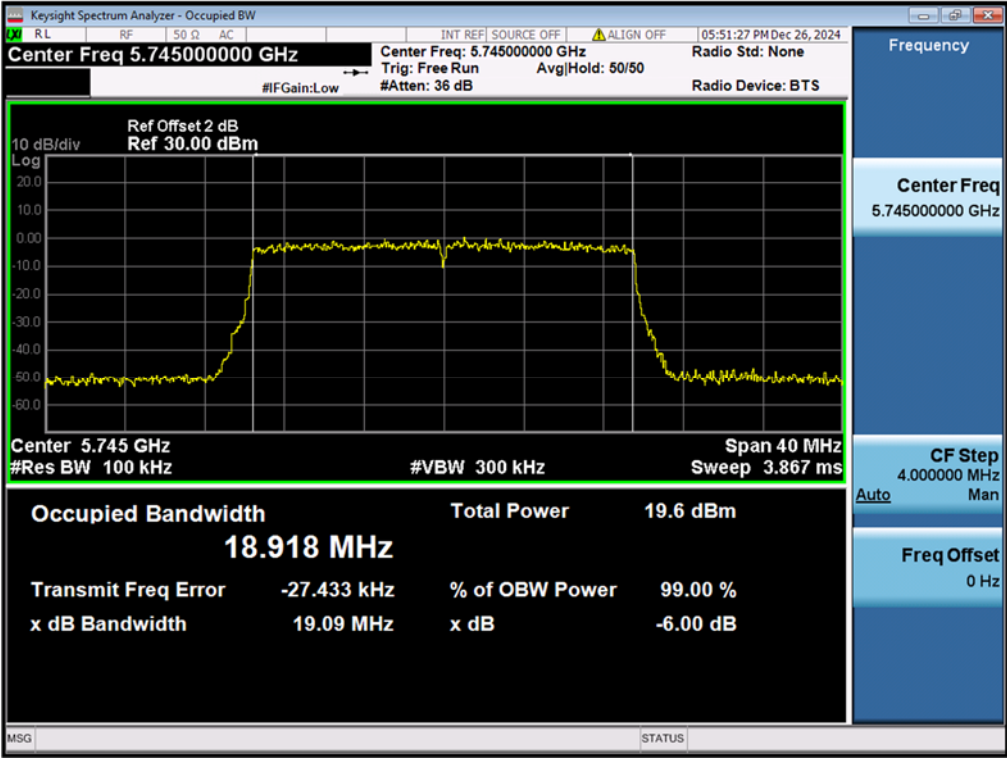

Test Plot of 99% Occupied Bandwidth

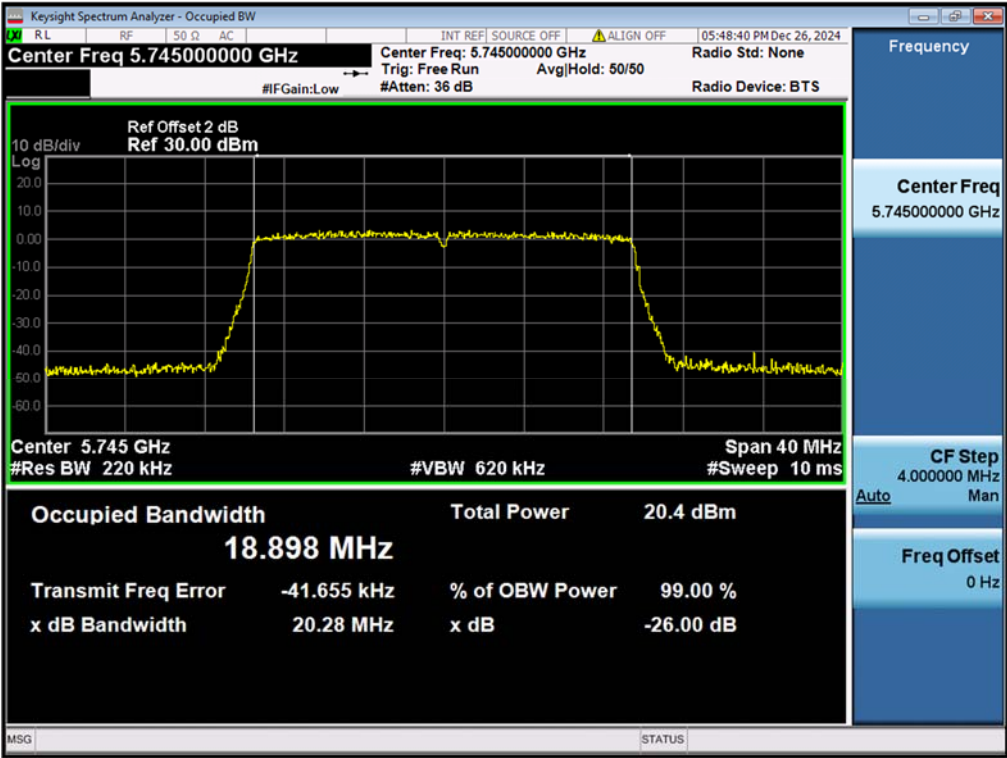


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 37 of 72

Figure 31: The plots of 6dB Bandwidth, 802.11ax(HE20), 5785MHz
Test Plot of -6dB Bandwidth

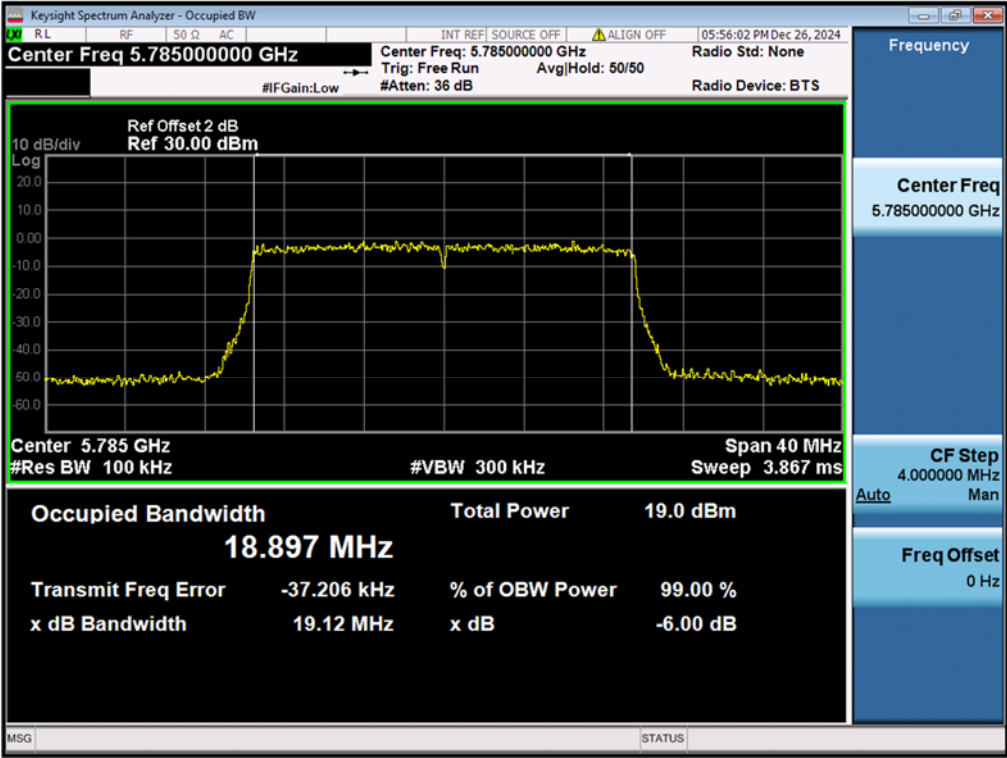

Test Plot of 99% Occupied Bandwidth

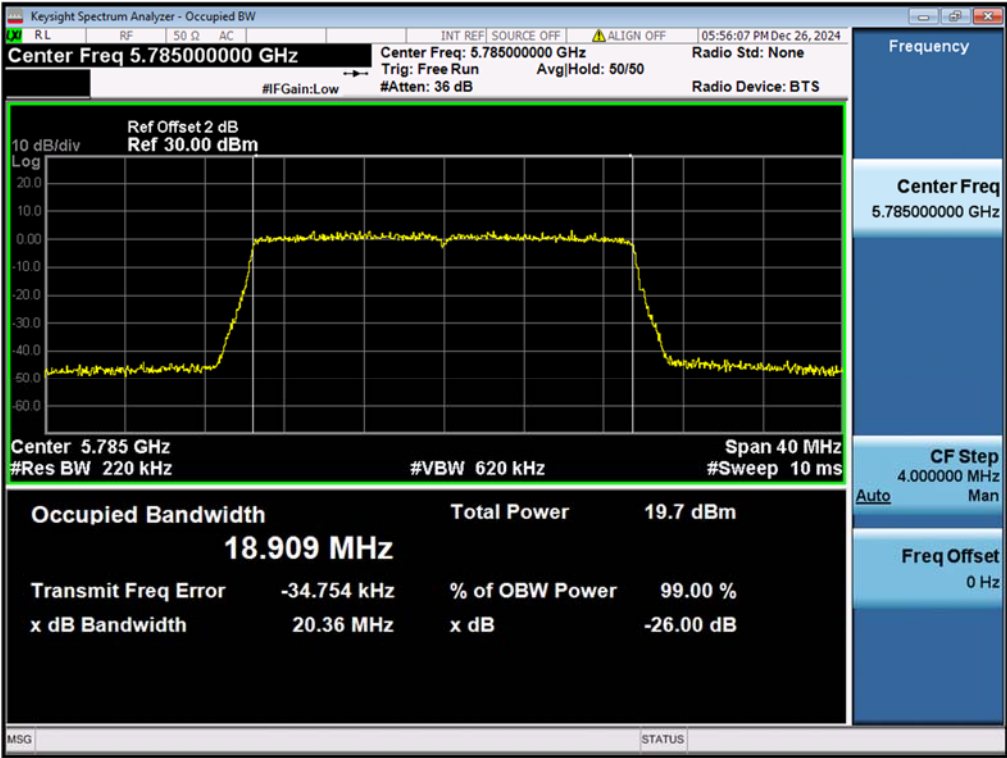


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 38 of 72

Figure 32: The plots of 6dB Bandwidth, 802.11ax(HE20), 5825MHz
Test Plot of -6dB Bandwidth

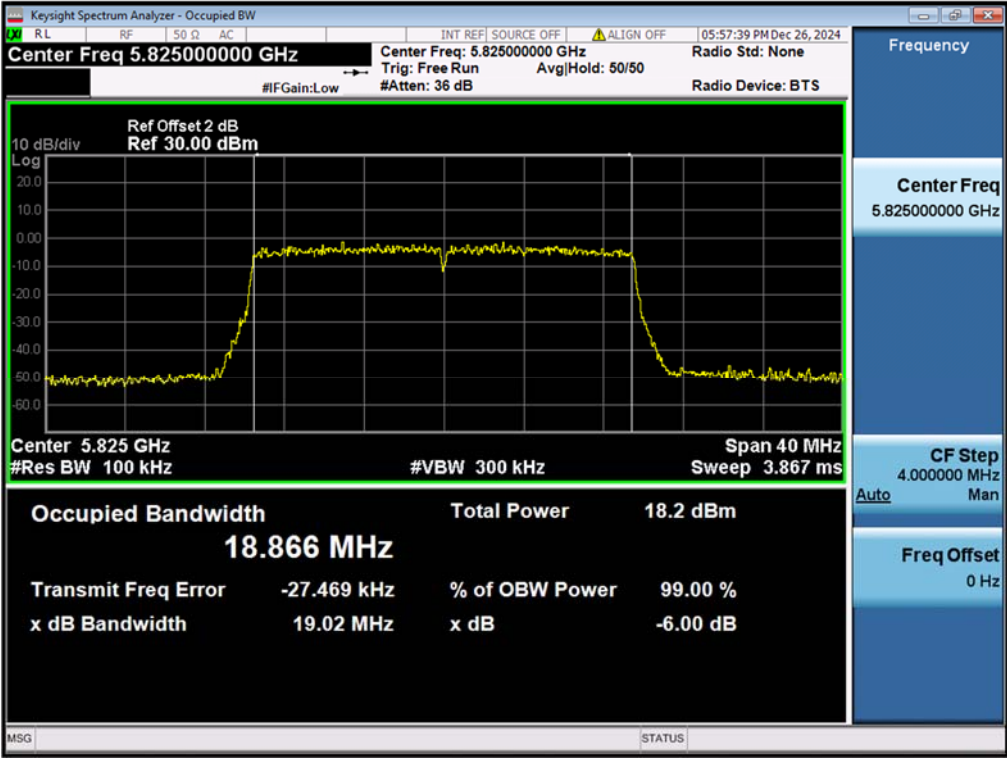

Test Plot of 99% Occupied Bandwidth

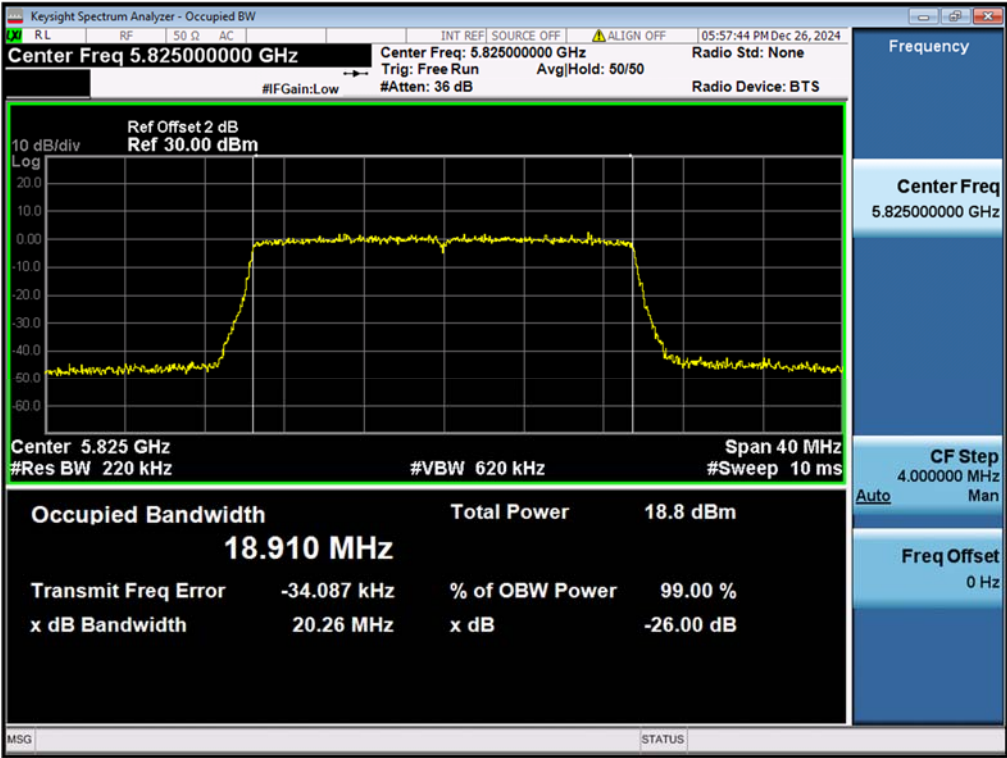


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 39 of 72

Figure 33: The plots of 6dB Bandwidth, 802.11n(HT40), 5755MHz
Test Plot of -6dB Bandwidth

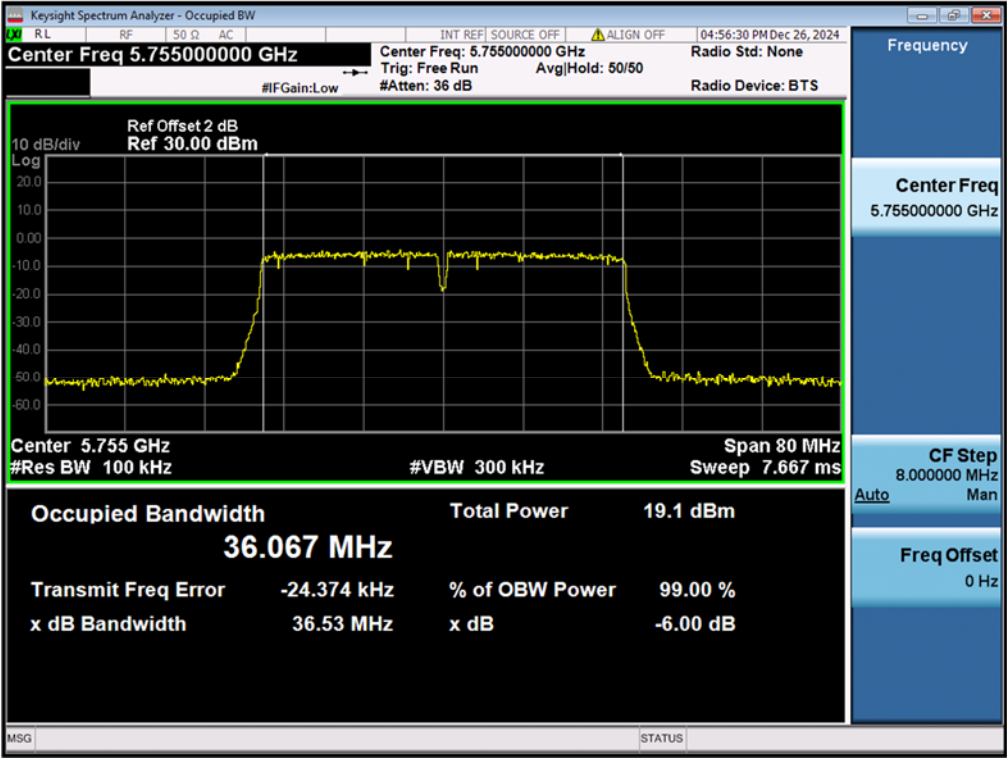

Test Plot of 99% Occupied Bandwidth

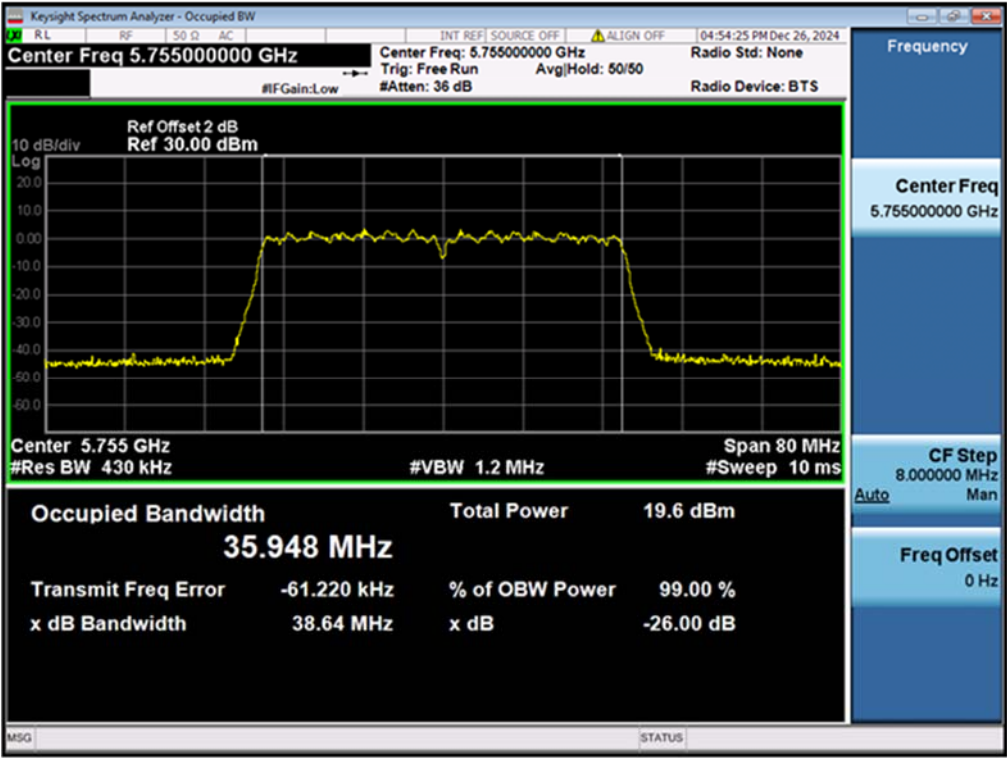


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 40 of 72

Figure 34: The plots of 6dB Bandwidth, 802.11n(HT40), 5795MHz
Test Plot of -6dB Bandwidth

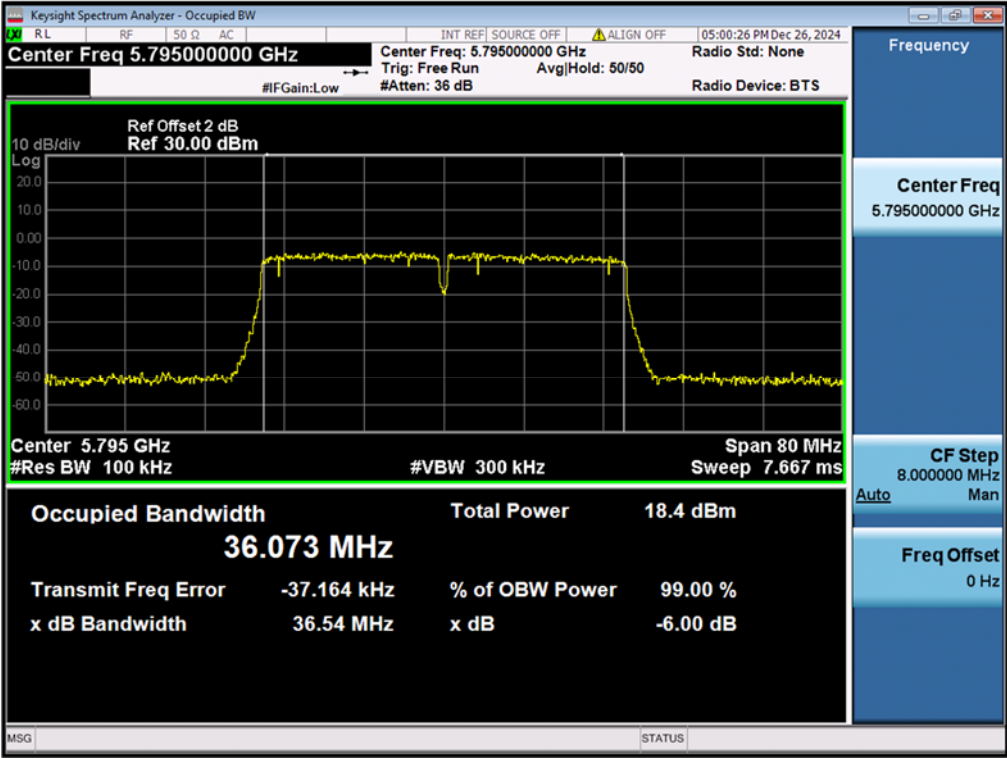

Test Plot of 99% Occupied Bandwidth

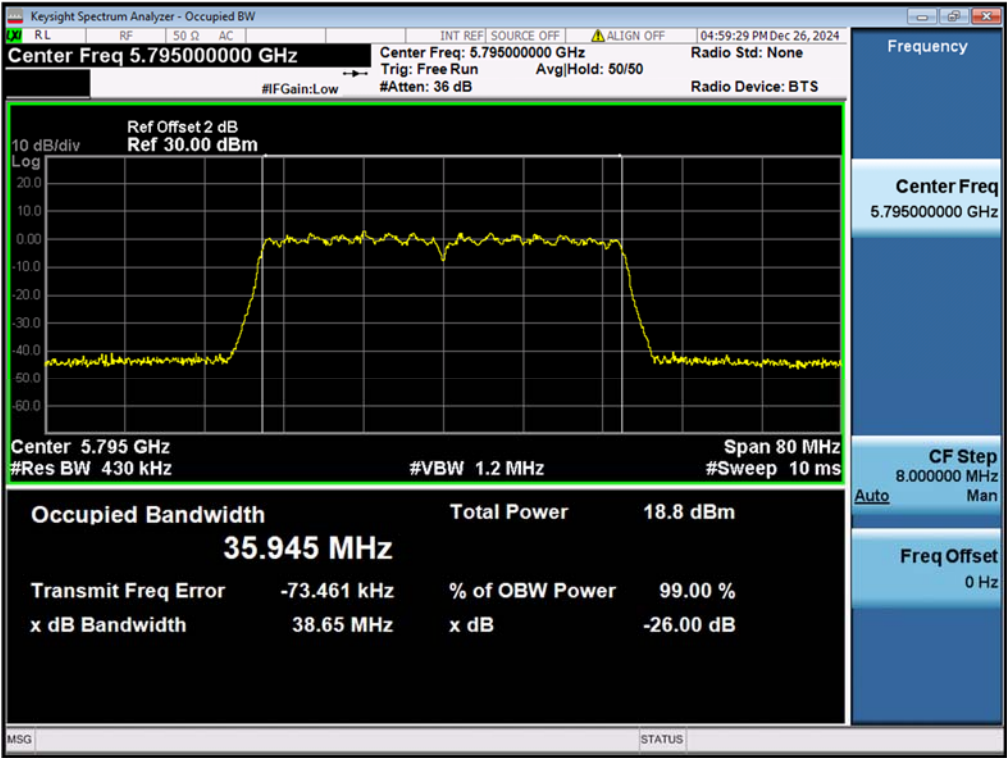


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 41 of 72

Figure 35: The plots of 6dB Bandwidth, 802.11ac(VHT40), 5755MHz
Test Plot of -6dB Bandwidth

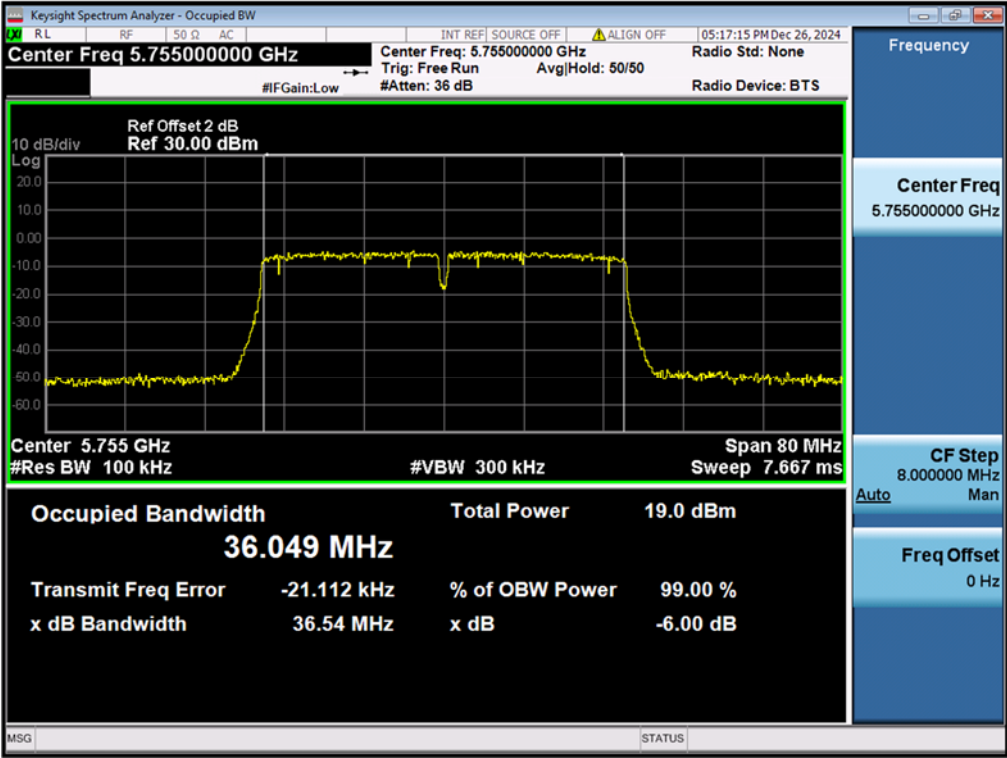

Test Plot of 99% Occupied Bandwidth

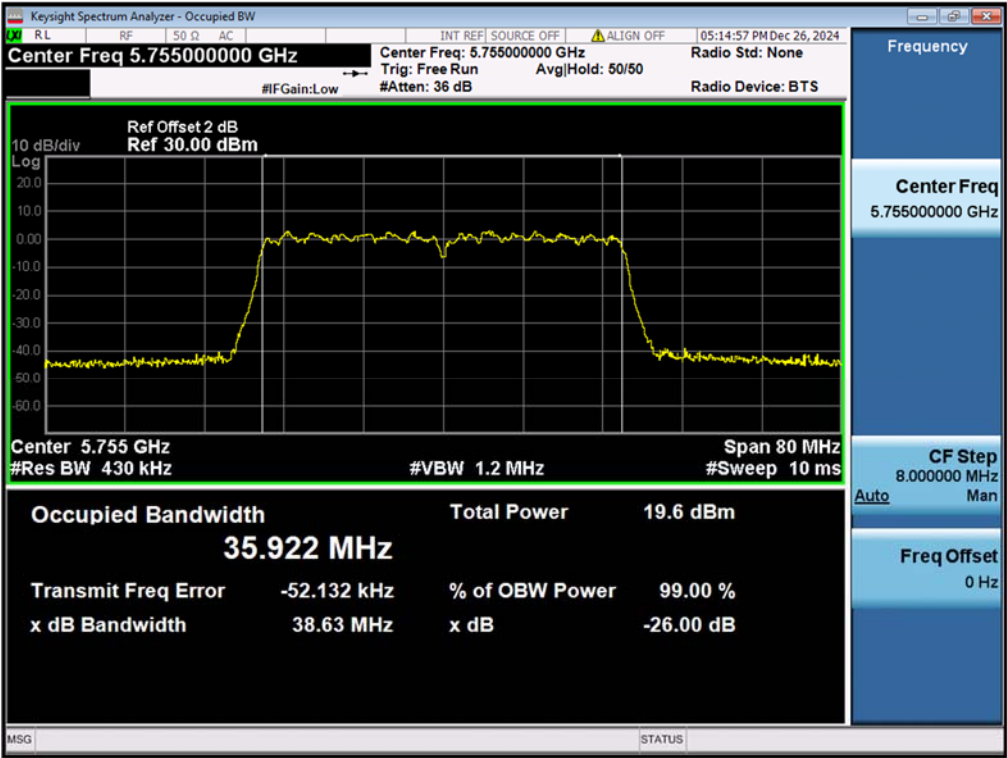


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 42 of 72

Figure 36: The plots of 6dB Bandwidth, 802.11ac(VHT40), 5795MHz
Test Plot of -6dB Bandwidth

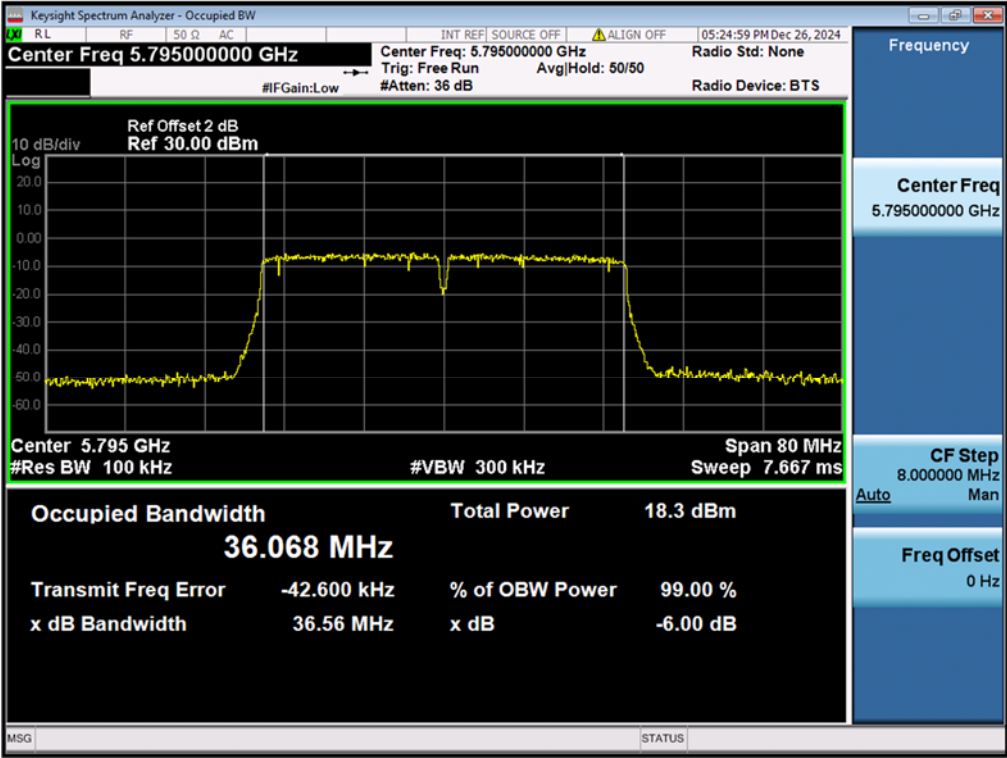

Test Plot of 99% Occupied Bandwidth

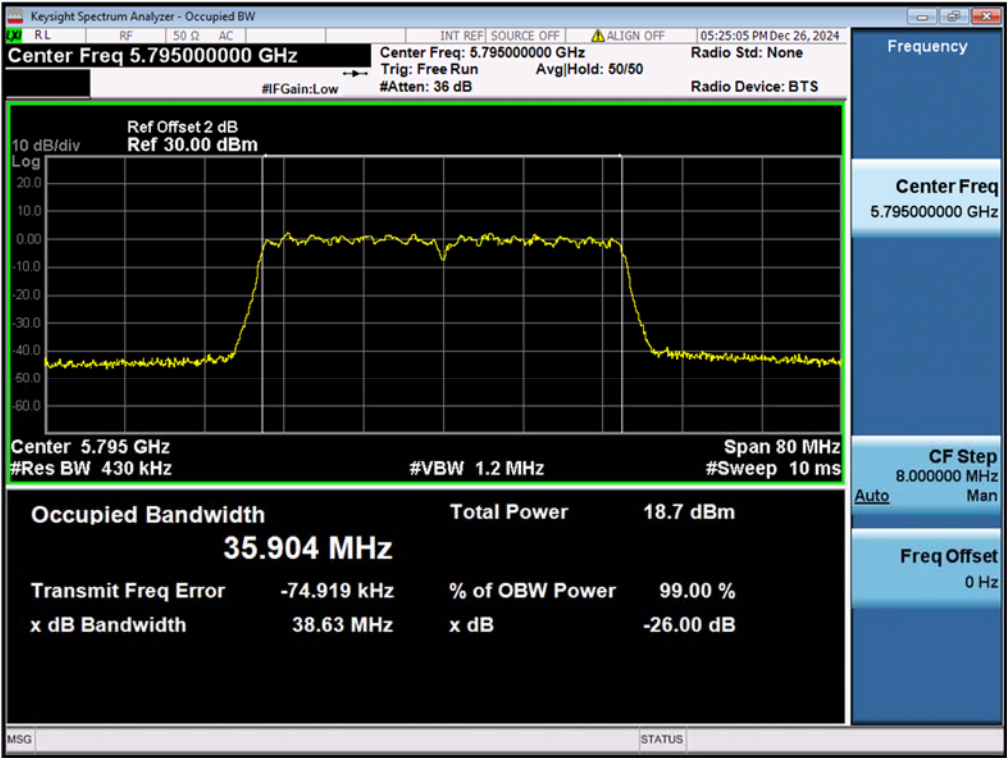


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 43 of 72

Figure 37: The plots of 6dB Bandwidth, 802.11ax(HE40), 5755MHz
Test Plot of -6dB Bandwidth

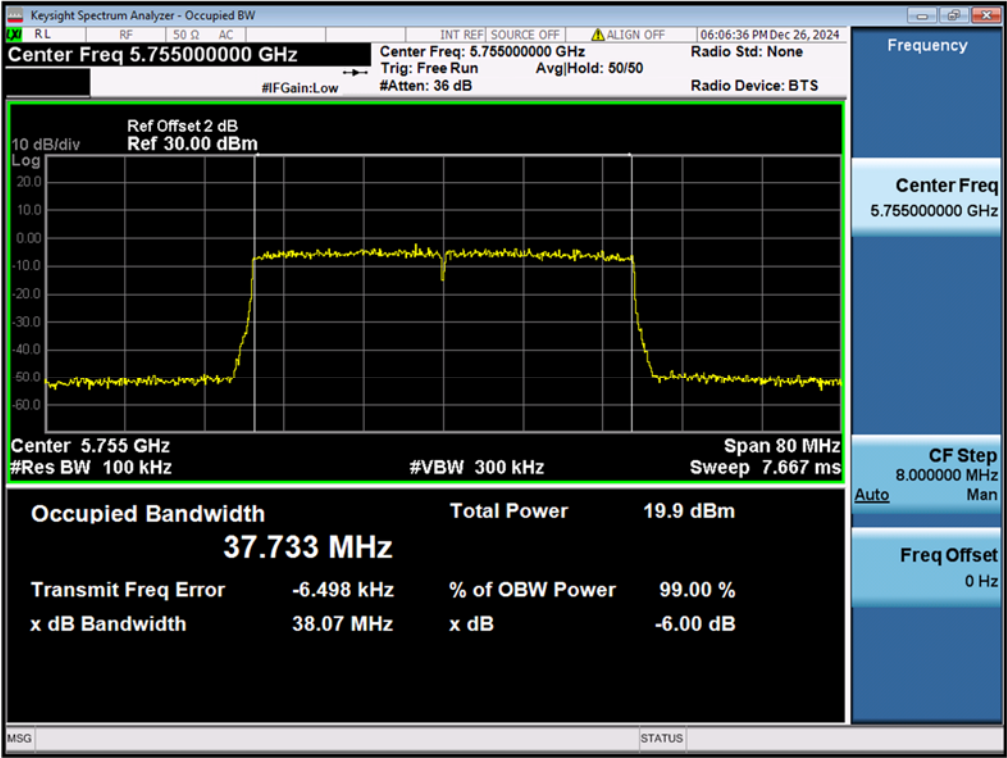

Test Plot of 99% Occupied Bandwidth

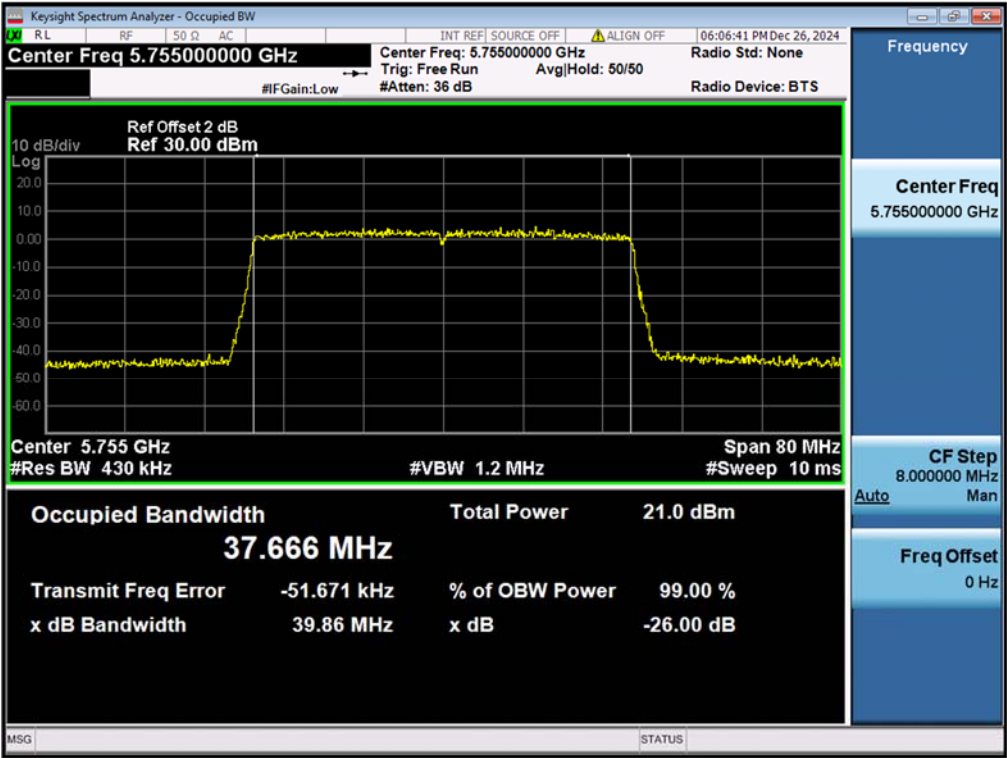


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 44 of 72

Figure 38: The plots of 6dB Bandwidth, 802.11ax(HE40), 5795MHz
Test Plot of -6dB Bandwidth

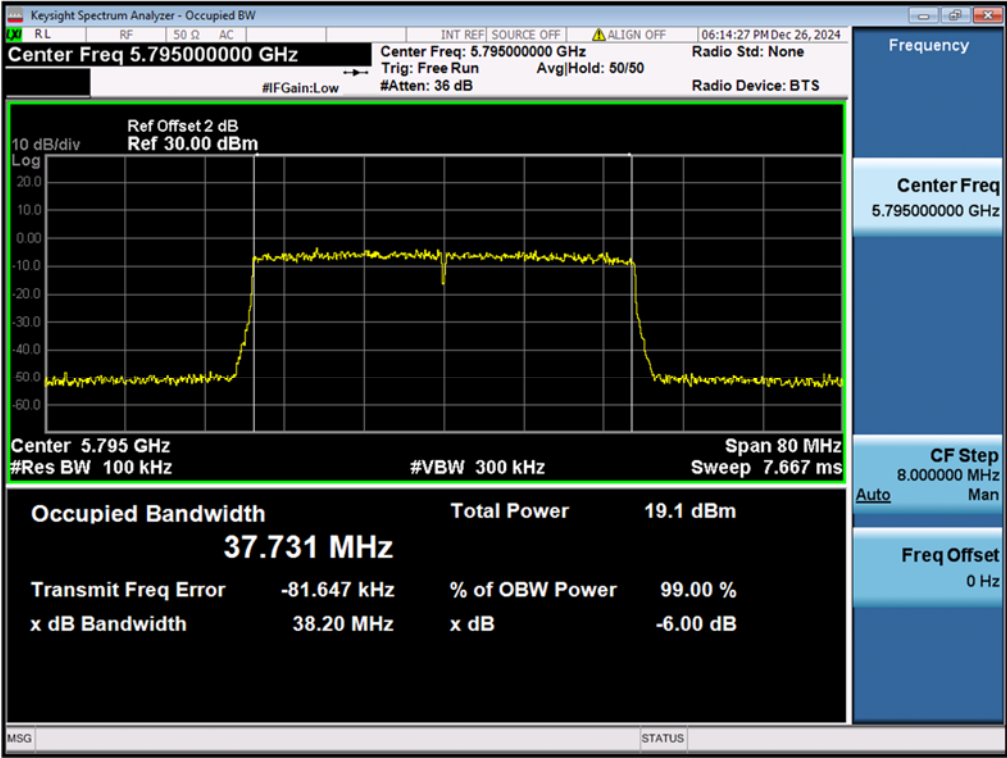

Test Plot of 99% Occupied Bandwidth

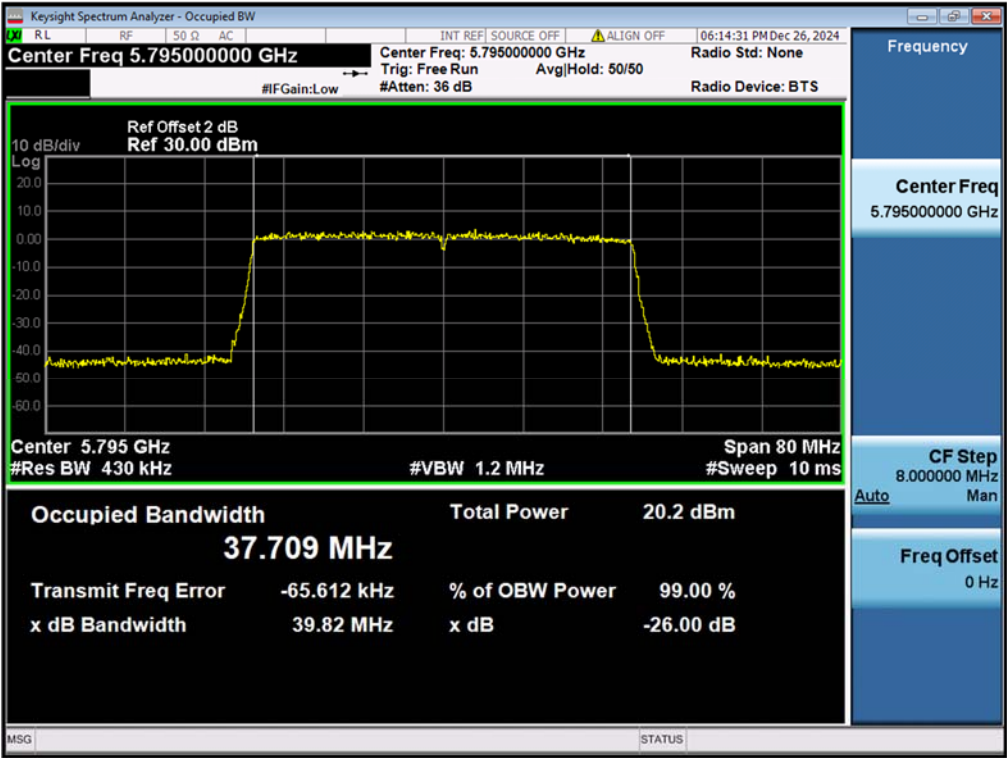


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 45 of 72

Figure 39: The plots of 6dB Bandwidth, 802.11ac(VHT80), 5775MHz
Test Plot of -6dB Bandwidth

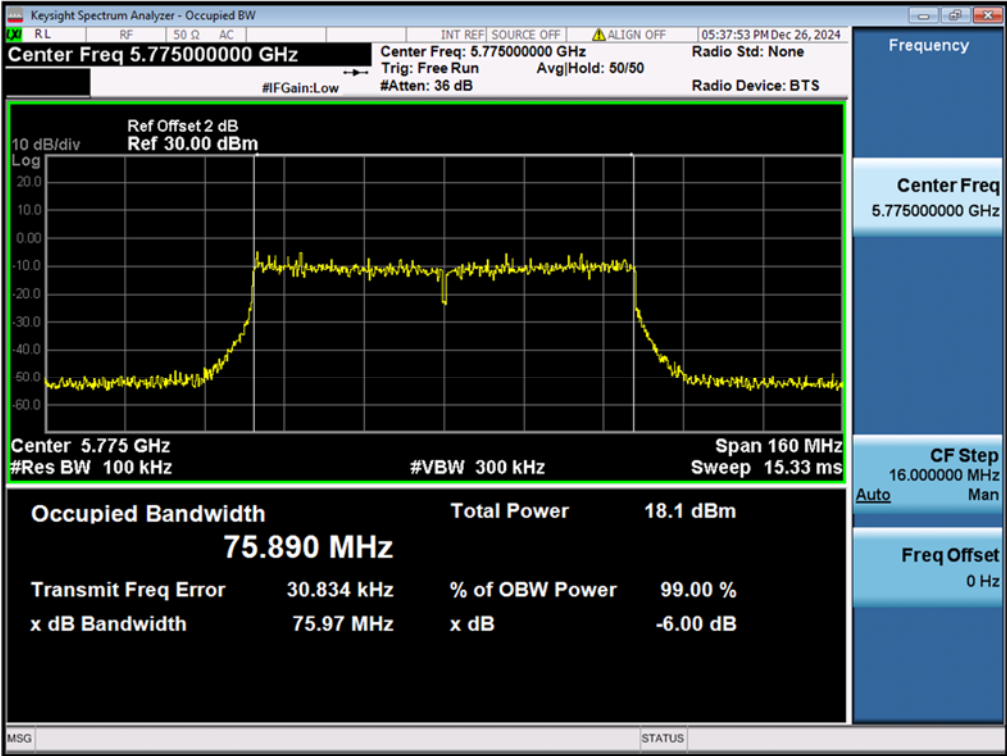

Test Plot of 99% Occupied Bandwidth

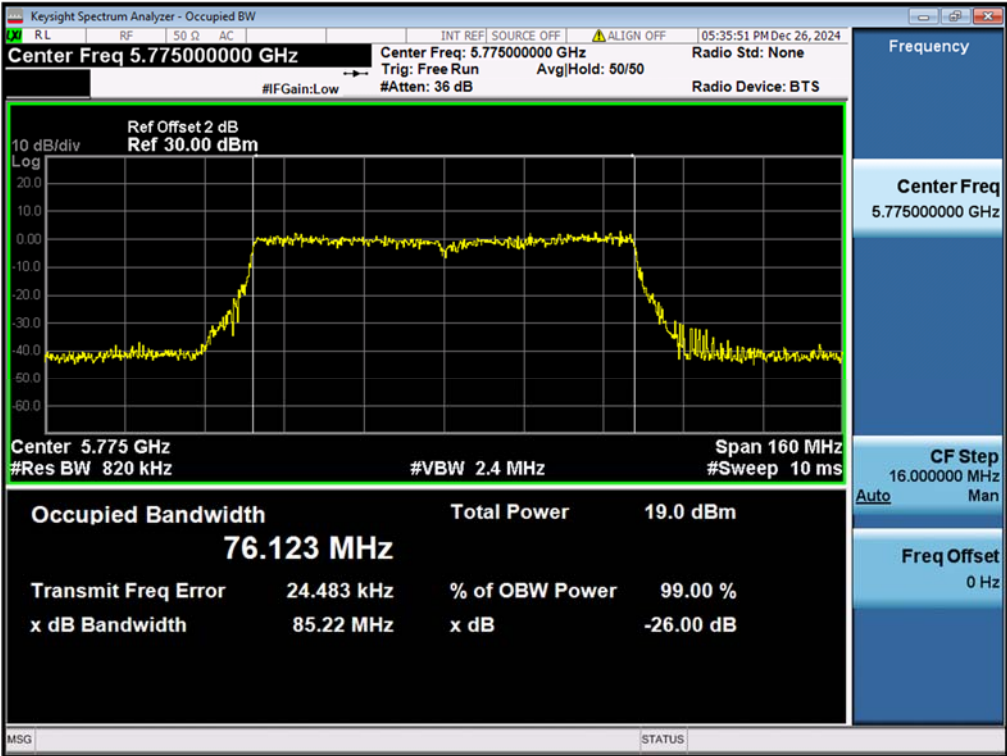


TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 46 of 72

Figure 40: The plots of 6dB Bandwidth, 802.11ax(HE80), 5775MHz
Test Plot of -6dB Bandwidth

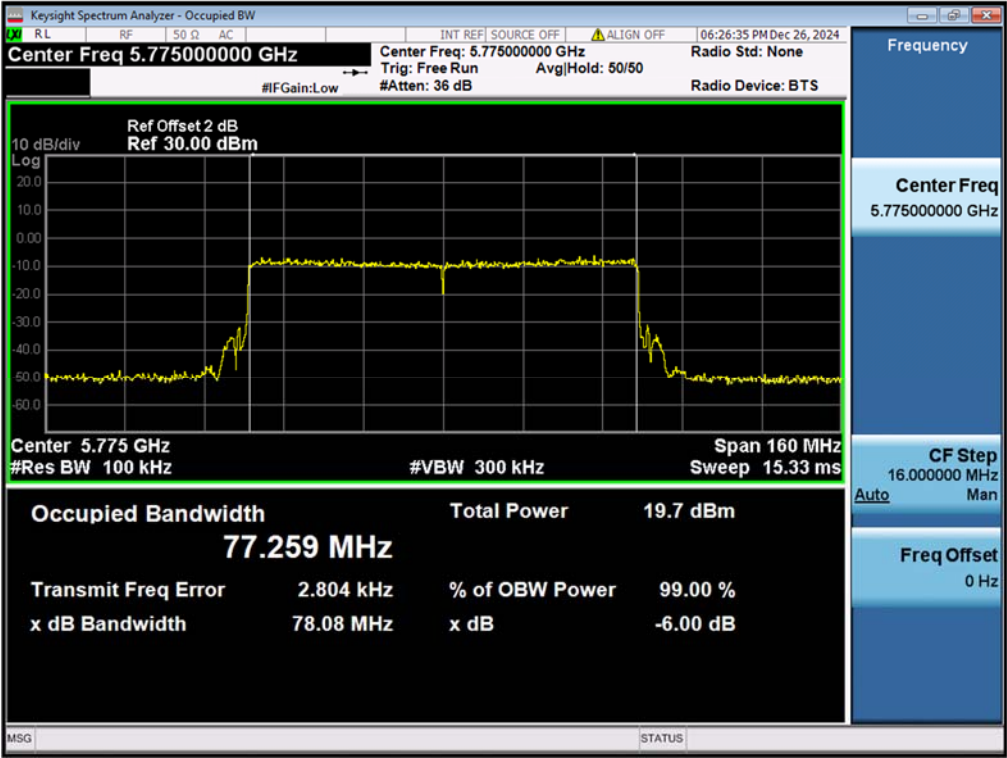

Test Plot of 99% Occupied Bandwidth

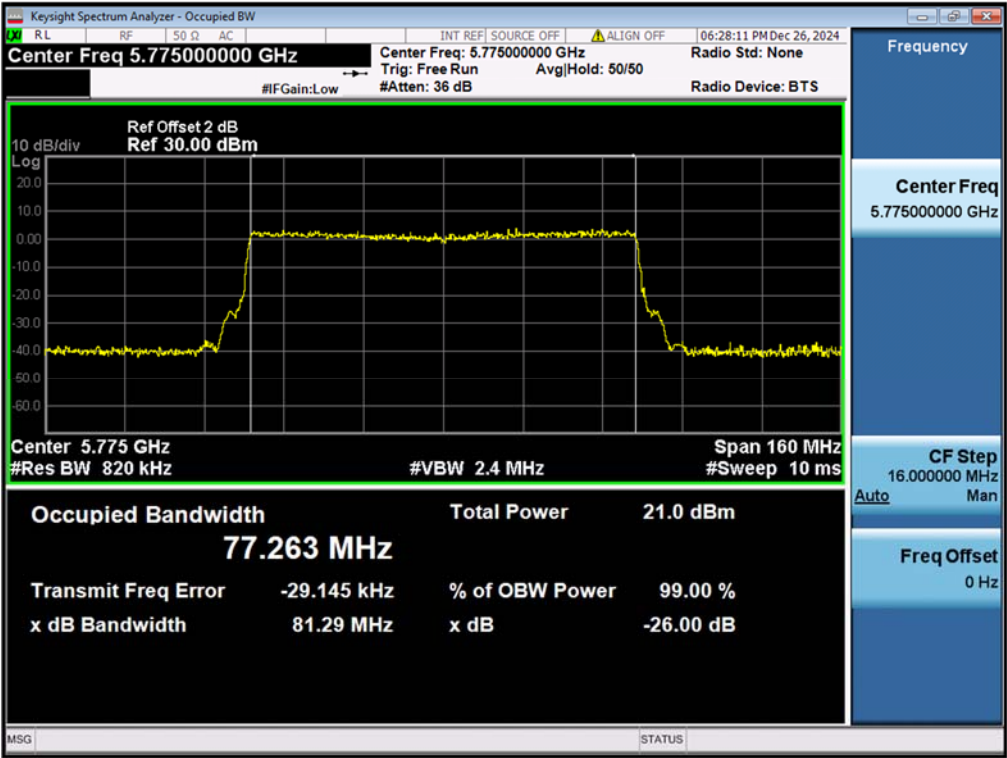

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 47 of 72

4.1.5 Maximum Conducted Output Power Spectral Density

RESULT:

PASS

Test standard	: FCC Part 15.407(a)
Requirement	: ANSI C63.10-2013 clause 12.5(SA-2), KDB 789033
Kind of test site	: Shielded room

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1.a
Ambient temperature	: 19.9-20.3°C
Relative humidity	: 35-44%

Notes:

1. Test plots please refer to the annex document "SHE24110067-02GE DATA WIFI 5GHz- Maximum Conducted Output Power Spectral Density Chain1 EXHIBIT A
2. Test plots please refer to the annex document "SHE24110067-02GE DATA WIFI 5GHz- Maximum Conducted Output Power Spectral Density Chain2 EXHIBIT A

TEST REPORT

Table 5: Maximum Conducted Output Power Spectral Density for U-NII-1 (5150 – 5250 MHz)

Test Mode	Duty Cycle (%)	Test Channel (MHz)	Maximum Conducted Output Power Spectral Density			Applicable Limit (dBm/MHz)
			Chain 1 (dBm/MHz)	Chain 2 (dBm/MHz)	Total (dBm/MHz)	
802.11a	100	5180	5.41	6.58	N/A	11
		5220	5.20	5.22	N/A	
		5240	5.10	4.86	N/A	
802.11n(HT20)	100	5180	3.71	4.14	6.94	
		5220	2.77	3.51	6.17	
		5240	3.35	3.14	6.26	
802.11ac(VHT20)	100	5180	4.01	4.00	7.02	
		5220	3.38	3.78	6.59	
		5240	2.88	3.15	6.03	
802.11ax(HE20)	100	5180	2.78	4.26	6.59	
		5220	2.82	3.24	6.05	
		5240	2.44	2.38	5.42	
802.11n(HT40)	100	5190	2.18	2.59	5.40	
		5230	1.68	1.81	4.76	
802.11ac(VHT40)	100	5190	2.28	2.44	5.37	
		5230	1.49	1.50	4.51	
802.11ax(HE40)	100	5190	2.95	3.51	6.25	
		5230	1.99	2.62	5.33	
802.11ac(VHT80)	100	5210	-1.58	-0.73	1.88	
802.11ax(HE80)	100	5210	-1.02	-0.24	2.40	

Notes:

1. 802.11a support SISO and 802.11n/ac/ax support MIMO.

2. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

TEST REPORT

Table 6: Maximum Conducted Output Power Spectral Density for U-NII-3 (5725 – 5850 MHz)

Test Mode	Duty Cycle (%)	Test Channel (MHz)	Maximum Conducted Output Power Spectral Density			Applicable Limit (dBm/500kHz)
			Chain 1 (dBm/500KHz)	Chain 2 (dBm/500KHz)	Total (dBm/500KHz)	
802.11a	100	5745	5.19	5.10	N/A	30
		5785	4.17	4.49	N/A	
		5825	3.62	3.91	N/A	
802.11n(HT20)	100	5745	5.08	5.41	8.26	
		5785	4.62	5.02	7.83	
		5825	4.06	4.13	7.11	
802.11ac(VHT20)	100	5745	5.00	5.97	8.52	
		5785	4.99	5.36	8.19	
		5825	4.21	3.96	7.10	
802.11ax(HE20)	100	5745	5.05	5.85	8.48	
		5785	4.56	5.04	7.82	
		5825	4.03	4.19	7.12	
802.11n(HT40)	100	5755	1.98	2.60	5.31	
		5795	1.61	1.22	4.43	
802.11ac(VHT40)	100	5755	1.67	1.83	4.76	
		5795	1.48	1.25	4.38	
802.11ax(HE40)	100	5755	2.99	3.28	6.15	
		5795	2.08	2.66	5.39	
802.11ac(VHT80)	100	5775	-2.61	-2.63	0.39	
802.11ax(HE80)	100	5775	-1.55	-0.91	1.79	

- Notes:
- 1. 802.11a support SISO and 802.11n/ac/ax support MIMO.
 - 2. Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 50 of 72

4.1.6 Conducted Spurious Emission

RESULT:

PASS

Test standard	: FCC Part 15.407(b), 15.209
Requirement	: ANSI C63.10-2013 clause 12.7.4, KDB 789033
Kind of test site	: Shielded room

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1.a
Ambient temperature	: 19.9-20.3°C
Relative humidity	: 35-44%

Notes

1. Two transmit chains (chain 1 and chain 2) had been tested, the chain 2 was the worst case and record in the test report.
2. The spurious emission at chain 2 is more than 3dB below the limits, so the MIMO results for the spurious emissions are comply with the requirement.
3. The spurious above 25GHz is noise only. The value has no need to be reported.
4. Test plots please refer to the annex document "SHE24110067-02GE DATA WIFI 5GHz-TX CSE EXHIBIT A".

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 51 of 72

4.1.7 Radiated Emission

RESULT:

PASS

Test standard	: FCC Part 15.407(b), 15.209, 15.205
Requirement	: ANSI C63.10-2013 clause 12.7.4, KDB 789033
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/Middle/High
Operation Mode	: A.1.a
Ambient temperature	: 25.1°C
Relative humidity	: 47%

Notes:

Test plots please refer to the annex document "SHE24110067-02GE DATA WIFI5GHz-TX EXHIBIT A"

1. For 9 kHz ~ 30 MHz, the amplitude of spurious emissions that are attenuated by more than 20dB below the permissible. The value has no need to be reported.
2. The spurious above 18GHz is noise only and 20dB below the limit. The value has no need to be reported.
3. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.
4. All antenna (SISO and MIMO) had been tested, The 802.11a20 of antenna 1 and The 802.11n/ac/ax of MIMO mode are the worst case and record in the test report.
5. Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Results-Limit.

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 52 of 72

4.1.8 Band Edge (Restricted-band band-edge)

RESULT:

PASS

Test standard	: FCC Part 15.407(b)
Requirement	: ANSI C63.10-2013 clause 12.7.4.4, KDB 789033
Kind of test site	: 3m Semi-Anechoic Chamber

Test setup

Test Channel	: Low/High
Operation Mode	: A.1.a
Ambient temperature	: 25.1°C
Relative humidity	: 47%

Notes:

Test plots please refer to the annex document "SHE24110067-02GE DATA WIFI5GHz-TX EXHIBIT A"

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.
2. All antenna (SISO and MIMO) had been tested, The 802.11a20 of antenna 1 and The 802.11n/ac/ax of MIMO mode are the worst case and record in the test report.
3. Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Results-Limit.

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 53 of 72

4.1.9 Frequency Stability

RESULT:

PASS

Test standard

: FCC Part 15.407(g)

Kind of test site

: Shielded room

Test setup

Test Channel

: Low/Middle/High

Operation Mode

: A.1.a

Ambient temperature

: 24.5°C

Relative humidity

: 58%

Table 2: Frequency Stability
U-NII-1 (5150 – 5250 MHz):
Voltage vs. Frequency Stability (5180MHz)

Test Conditions		Frequency (MHz)	Max. Deviation (ppm)	Limit (ppm)
Temp (°C)	Voltage (V)			
20	AC 120V	5179.977425	4.36	± 20
	AC 100V	5179.977550	4.33	
	AC 240V	5179.977900	4.27	

Temperature vs. Frequency Stability (5180MHz)

Test Conditions		Frequency (MHz)	Max. Deviation (ppm)	Limit (ppm)
Voltage (V)	Temp (°C)			
AC 120V	0	5179.978200	4.21	± 20
	10	5179.978125	4.22	
	20	5179.977775	4.29	
	30	5179.978050	4.24	
	40	5179.978275	4.19	
	50	5179.977725	4.30	
	60	5179.977400	4.36	
	70	5179.977175	4.41	

Note:
The all configurations were tested respectively, but only the worst channel shown here.

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 54 of 72

U-NII-3 (5725 – 5850 MHz):
Voltage vs. Frequency Stability (5745MHz)

Test Conditions		Frequency (MHz)	Max. Deviation (ppm)	Limit (ppm)
Temp (°C)	Voltage (V)			
20	AC 120V	.	2.89	±20
	AC 100V	5744.983250	2.92	
	AC 240V	5744.983050	2.95	

Temperature vs. Frequency Stability (5745MHz)

Test Conditions		Frequency (MHz)	Max. Deviation (ppm)	Limit (ppm)
Voltage (V)	Temp (°C)			
AC 120V	0	5744.983450	2.88	±20
	10	5744.982700	3.01	
	20	5744.982600	3.03	
	30	5744.980825	3.34	
	40	5744.980775	3.35	
	50	5744.981325	3.25	
	60	5744.981175	3.28	
	70	5744.981400	3.24	

Note:
The all configurations were tested respectively, but only the worst channel shown here.

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 55 of 72

4.2 Mains Emissions

4.2.1 Conducted Emission on AC Mains

RESULT:

PASS

Test standard	: FCC Part 15.207(a)
Requirement	: ANSI C63.10-2013, Clause 6.2
Kind of test site	: Shielded room

Test setup	
Input Voltage	: which received AC 120V, 60Hz Power
Operation Mode	: A.1.a
Earthing	: Connected to GND
Ambient temperature	: 21.6°C
Relative humidity	: 49%

For details refer to following test plot.

TEST REPORT


Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 56 of 72

Note: The all configurations were tested respectively, but only the worst configuration shown here.


Figure 41: Conducted Emission on AC Mains, L Phase

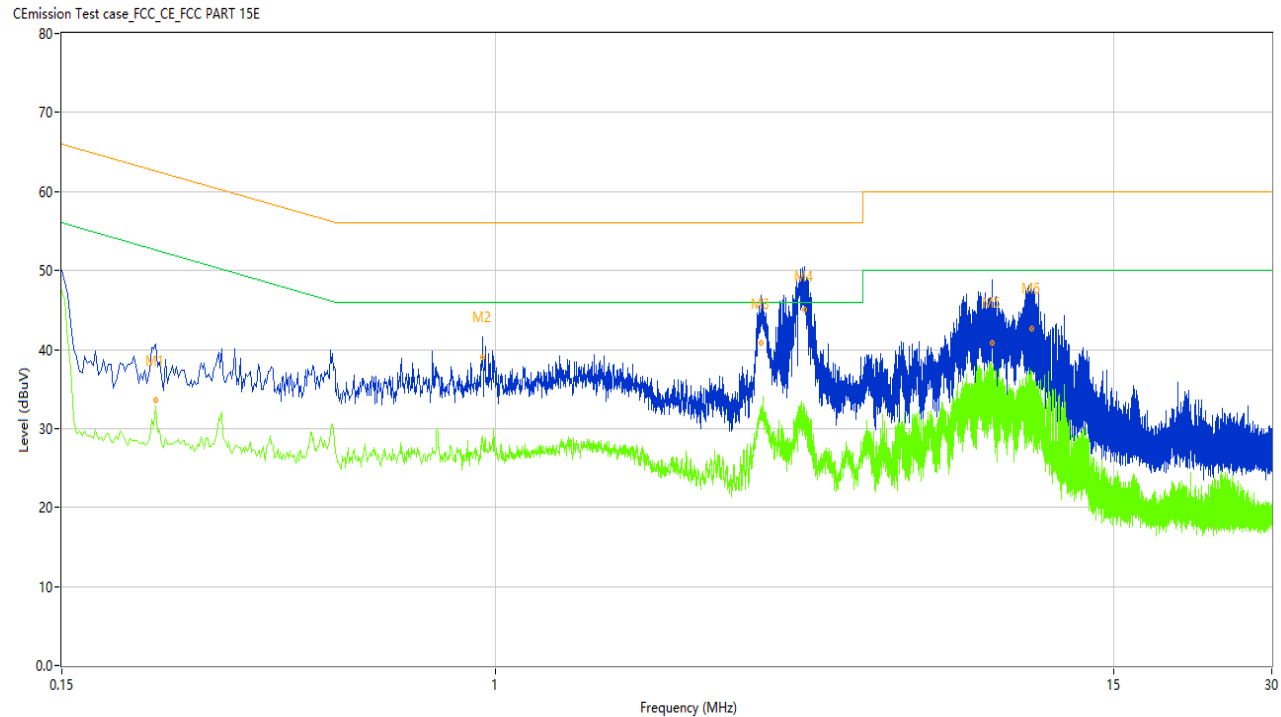

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.226	39.05	10.23	62.60	23.55	Peak	L	Pass
1*	0.226	33.53	10.23	62.60	29.07	QP	L	Pass
1**	0.226	32.85	10.23	52.60	19.75	AV	L	Pass
2	0.948	43.62	10.10	56.00	12.38	Peak	L	Pass
2*	0.948	38.99	10.10	56.00	17.01	QP	L	Pass
2**	0.948	29.06	10.10	46.00	16.94	AV	L	Pass
3	3.212	48.27	10.11	56.00	7.73	Peak	L	Pass
3*	3.212	40.75	10.11	56.00	15.25	QP	L	Pass
3**	3.212	31.47	10.11	46.00	14.53	AV	L	Pass
4	3.880	50.52	10.15	56.00	5.48	Peak	L	Pass
4*	3.880	45.01	10.15	56.00	10.99	QP	L	Pass
4**	3.880	32.13	10.15	46.00	13.87	AV	L	Pass
5	8.818	47.78	10.34	60.00	12.22	Peak	L	Pass
5*	8.818	40.77	10.34	60.00	19.23	QP	L	Pass
5**	8.818	37.68	10.34	50.00	12.32	AV	L	Pass
6	10.472	49.79	10.38	60.00	10.21	Peak	L	Pass
6*	10.472	42.65	10.38	60.00	17.35	QP	L	Pass
6**	10.472	36.97	10.38	50.00	13.03	AV	L	Pass

TEST REPORT

Figure 42: Conducted Emission on AC Mains, N Phase

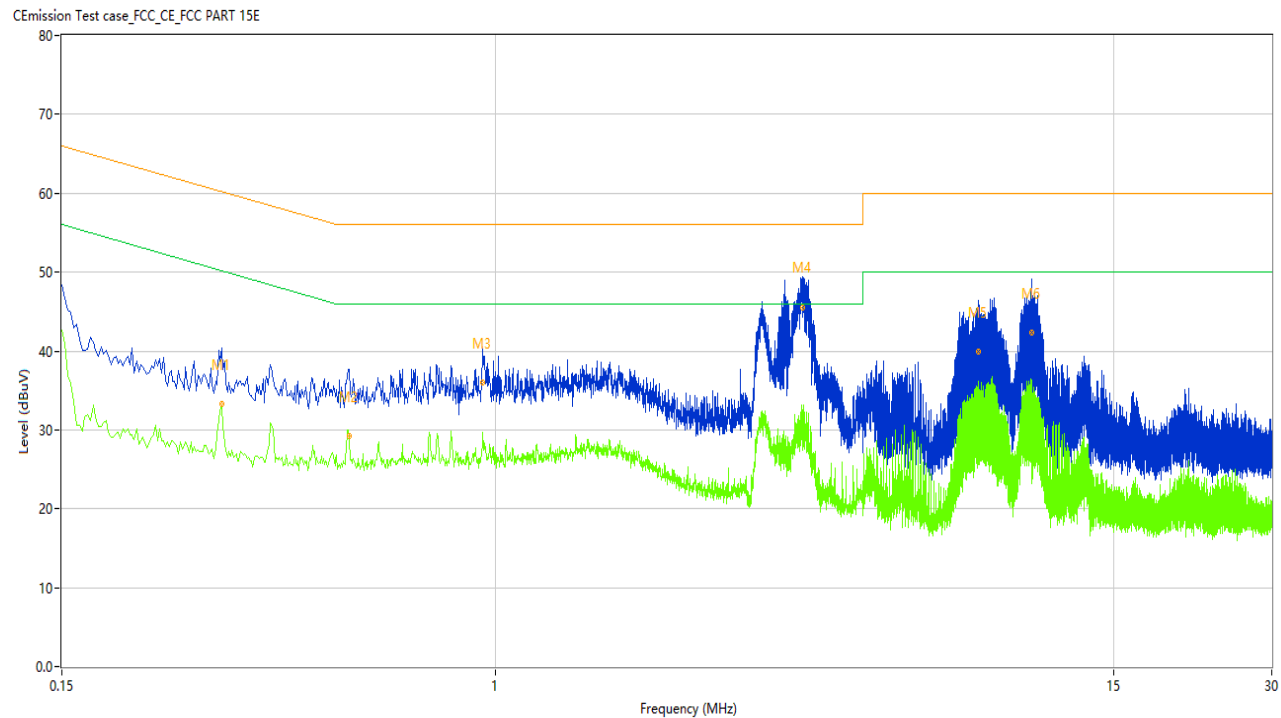

No.	Frequency (MHz)	Results (dBUV)	Factor (dB)	Limit (dBUV)	Over Limit (dB)	Detector	Line	Verdict
1	0.302	37.74	10.10	60.19	22.45	Peak	N	Pass
1*	0.302	33.23	10.10	60.19	26.96	QP	N	Pass
1**	0.302	33.03	10.10	50.19	17.16	AV	N	Pass
2	0.528	34.99	10.04	56.00	21.01	Peak	N	Pass
2*	0.528	29.17	10.04	56.00	26.83	QP	N	Pass
2**	0.528	28.99	10.04	46.00	17.01	AV	N	Pass
3	0.946	43.17	9.98	56.00	12.83	Peak	N	Pass
3*	0.946	35.97	9.98	56.00	20.03	QP	N	Pass
3**	0.946	28.49	9.98	46.00	17.51	AV	N	Pass
4	3.848	50.16	10.07	56.00	5.84	Peak	N	Pass
4*	3.848	45.43	10.07	56.00	10.57	QP	N	Pass
4**	3.848	31.36	10.07	46.00	14.64	AV	N	Pass
5	8.298	47.00	10.23	60.00	13.00	Peak	N	Pass
5*	8.298	39.85	10.23	60.00	20.15	QP	N	Pass
5**	8.298	32.82	10.23	50.00	17.18	AV	N	Pass
6	10.496	49.01	10.28	60.00	10.99	Peak	N	Pass
6*	10.496	42.33	10.28	60.00	17.67	QP	N	Pass
6**	10.496	36.25	10.28	50.00	13.75	AV	N	Pass

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 58 of 72

5 Appendixes

5.1 Photographs of the Sample



Front of the sample



Rear of the sample

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 59 of 72



Left of the sample



Right of the sample

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 60 of 72



Top of the sample



Bottom of the sample

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 61 of 72



Open-1 of the sample




Internal-1 of the sample

TEST REPORT


Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 62 of 72

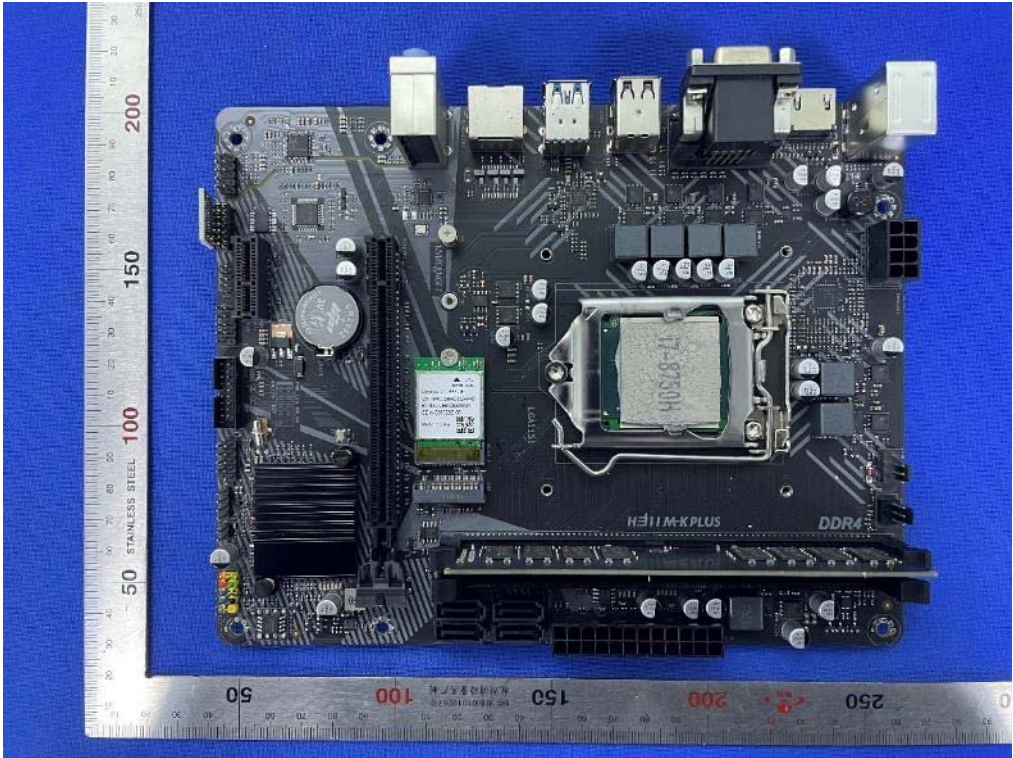

Internal-2 of the sample

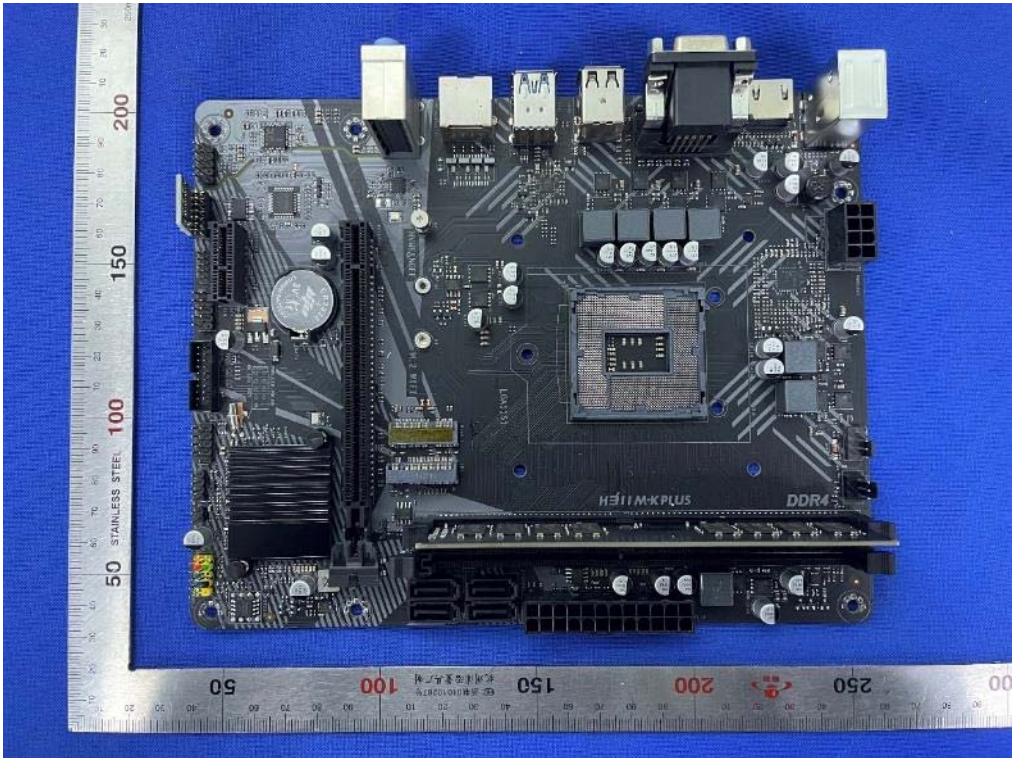


Internal-3 of the sample

TEST REPORT


Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 63 of 72

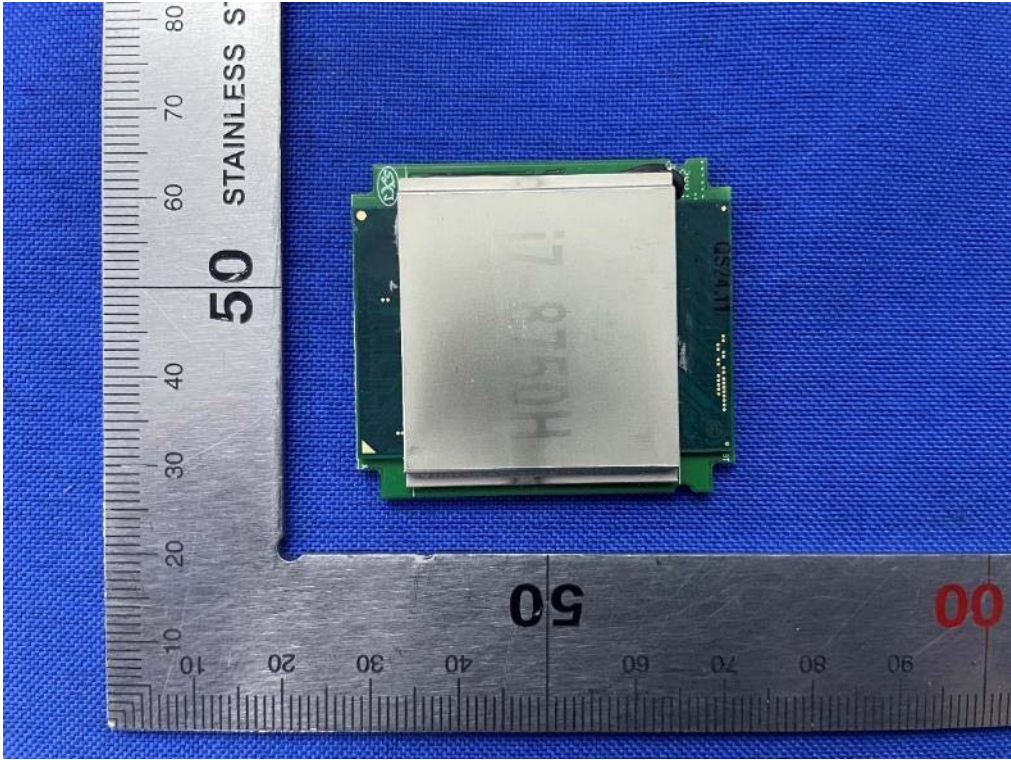

Internal-4 of the sample

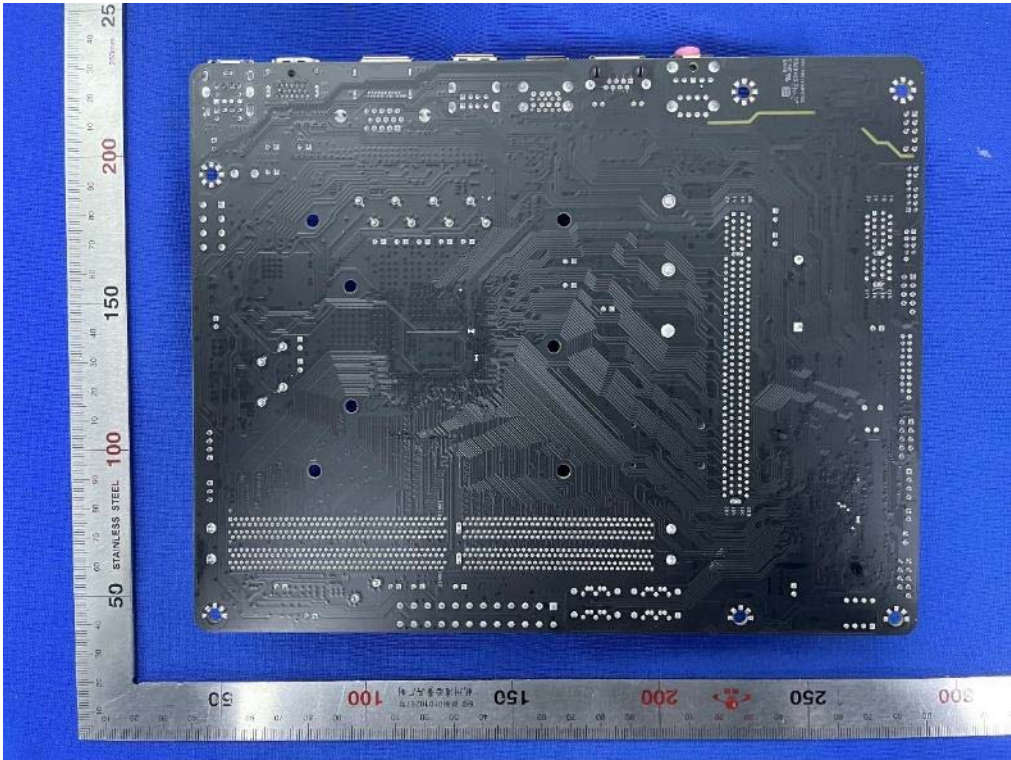


Internal-5 of the sample

TEST REPORT


Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 64 of 72

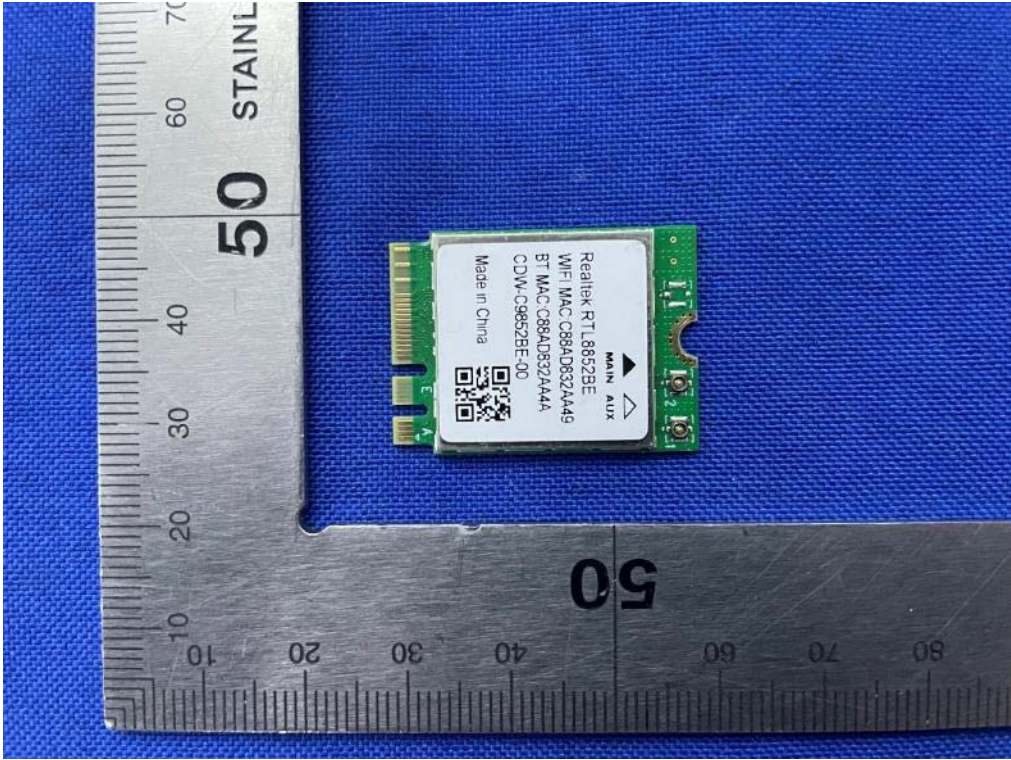

Internal-6 of the sample

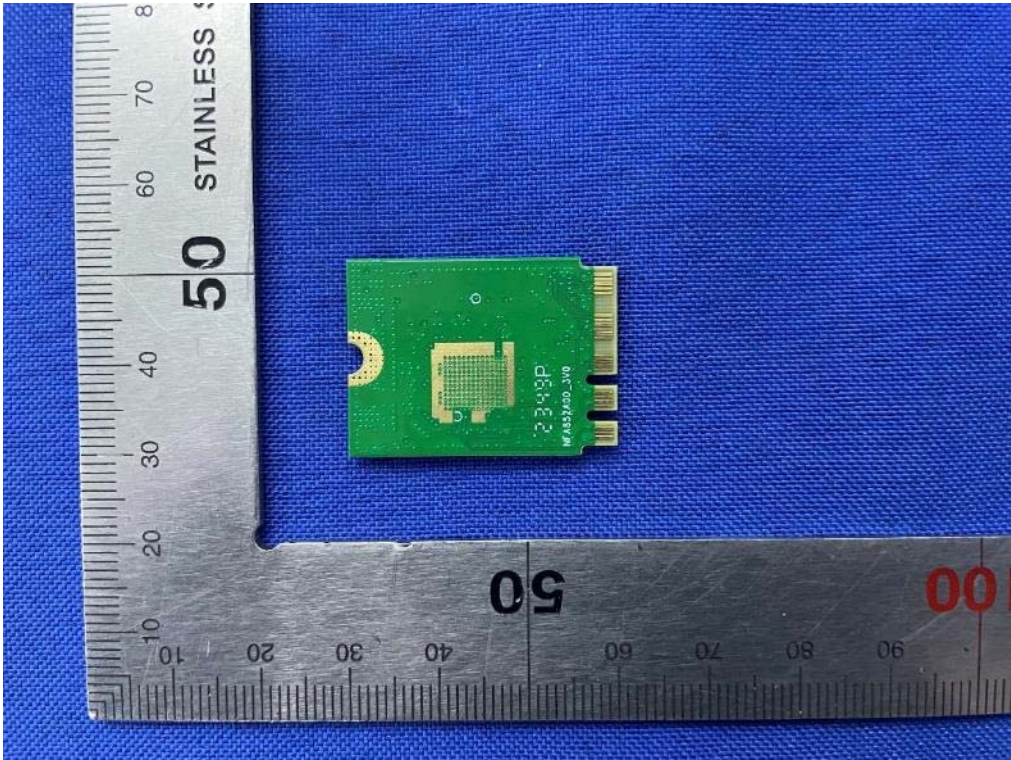


Internal-7 of the sample

TEST REPORT


Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 65 of 72

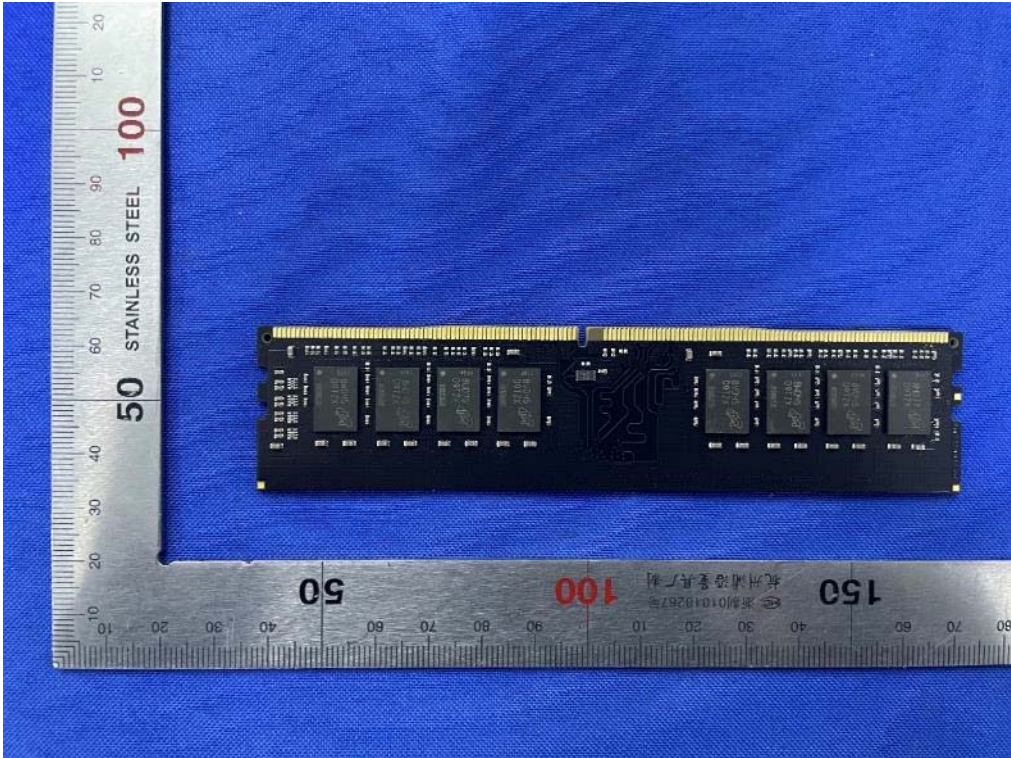

Internal-8 of the sample

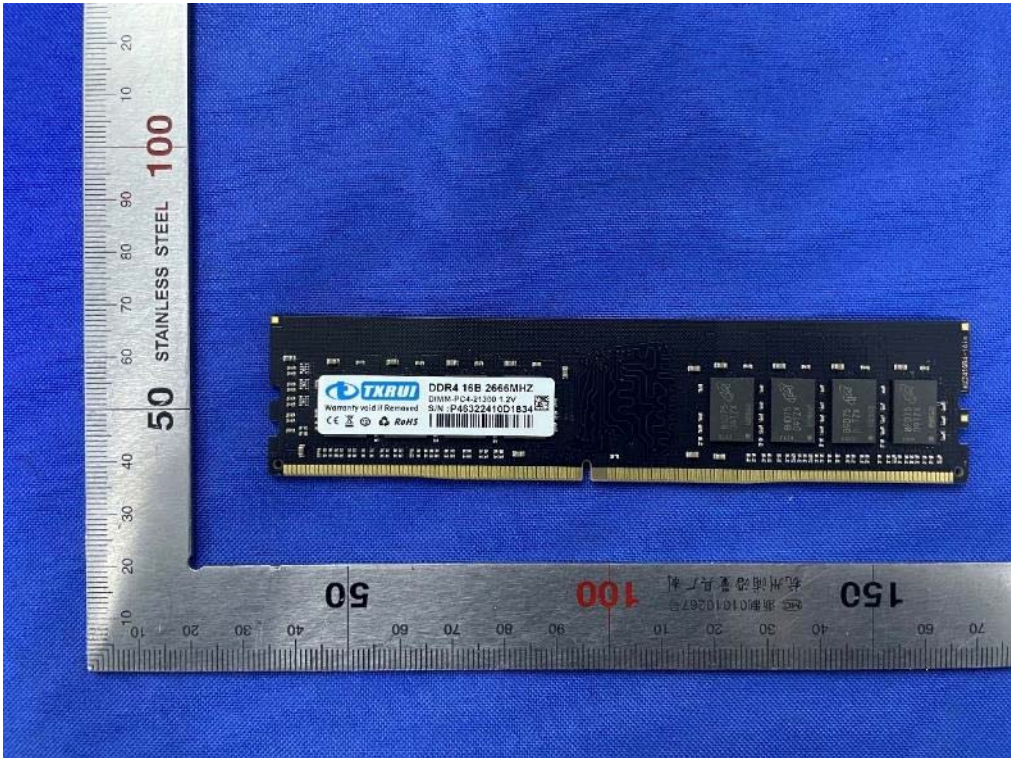

Internal-9 of the sample

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 66 of 72



Internal-10 of the sample



Internal-11 of the sample

TEST REPORT


Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 67 of 72



Internal-12 of the sample

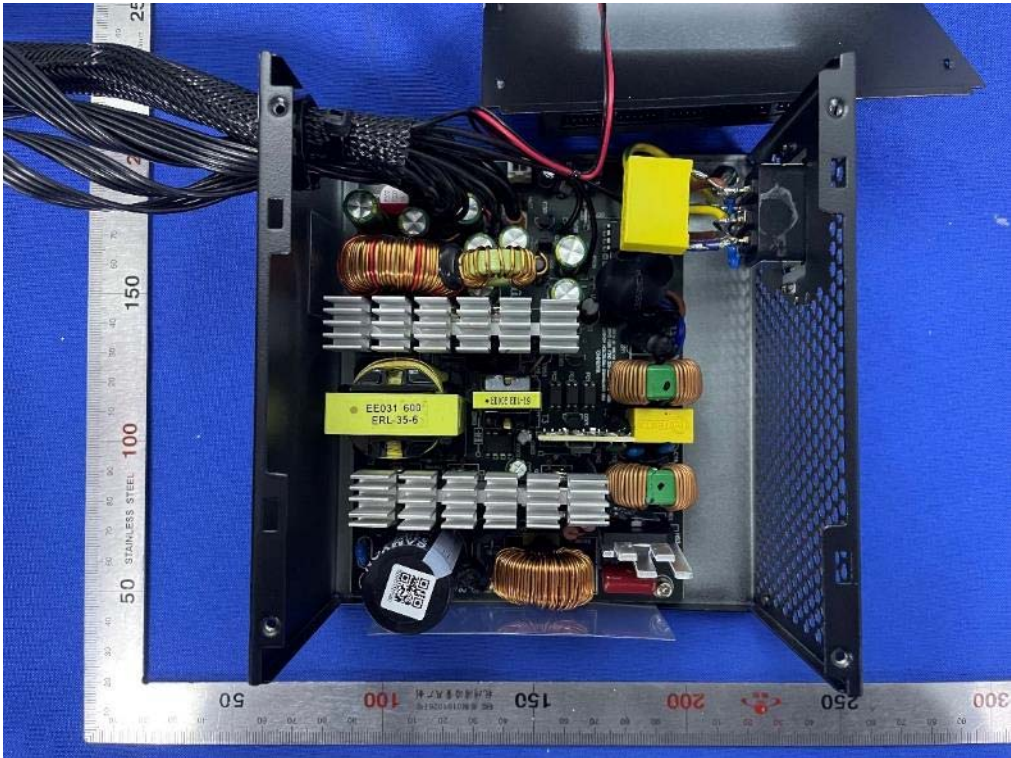


Internal-13 of the sample

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 68 of 72

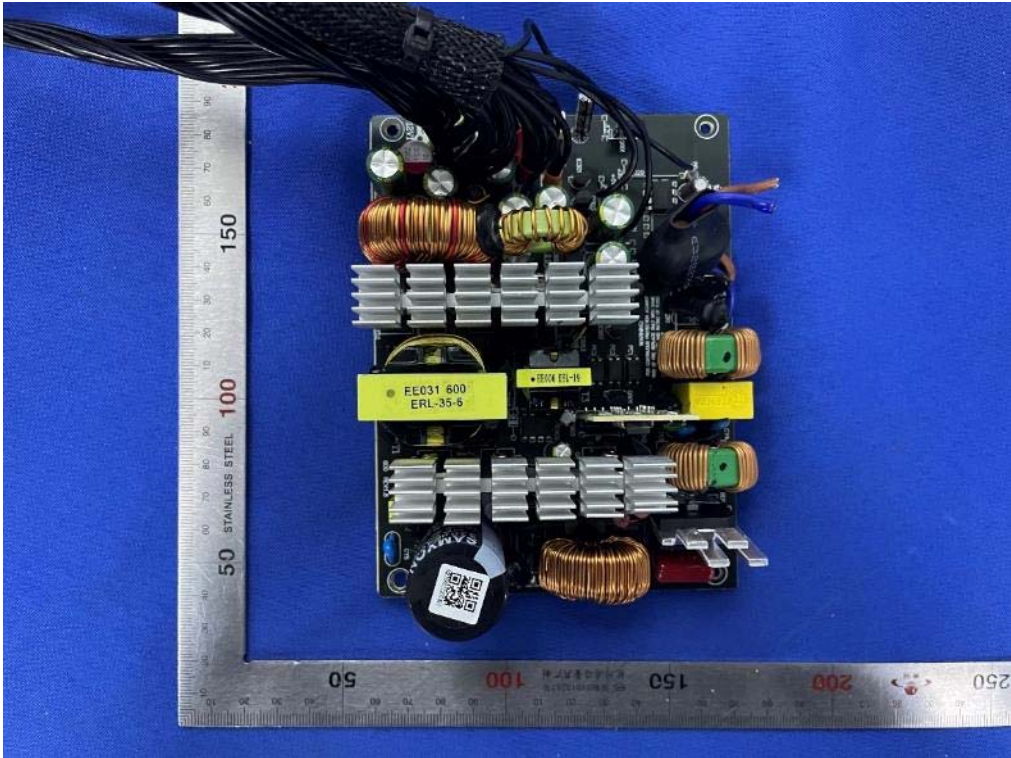

Internal-14 of the sample




Internal-15 of the sample

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 69 of 72

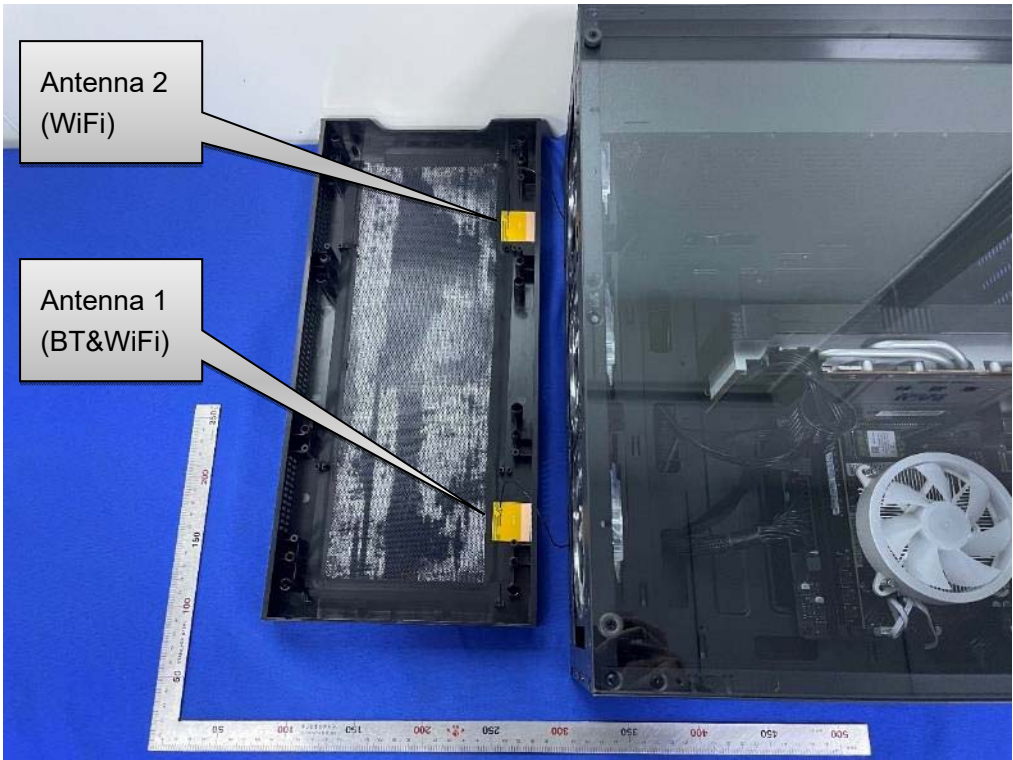

Antenna Position





Antenna Interface

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 70 of 72

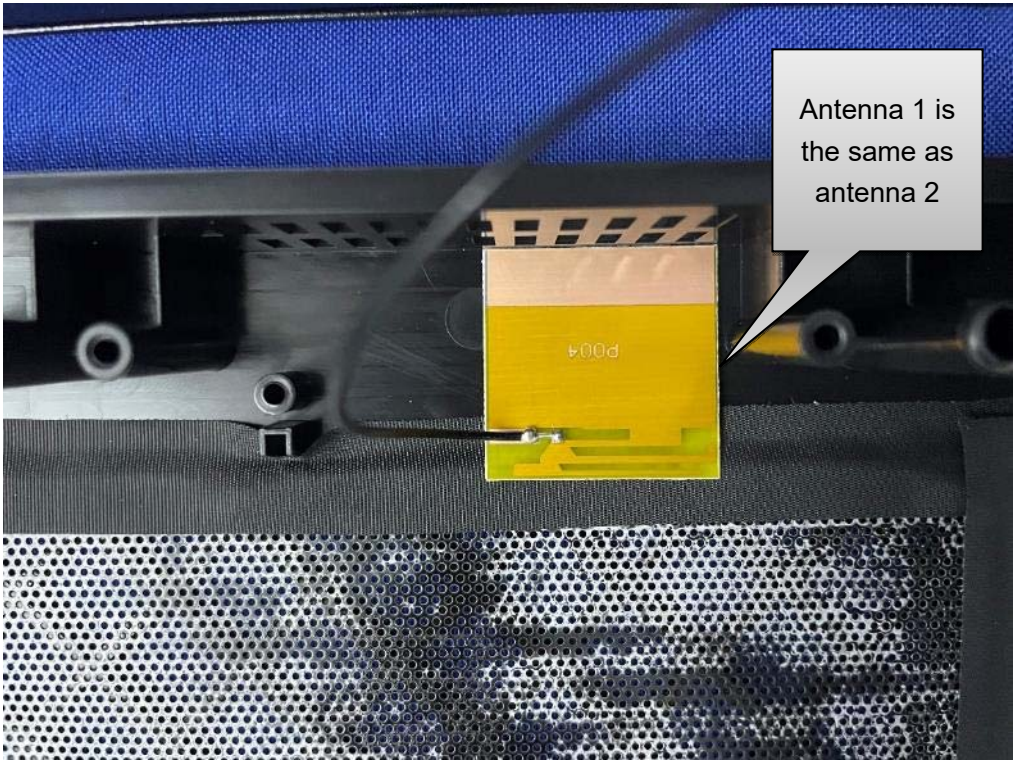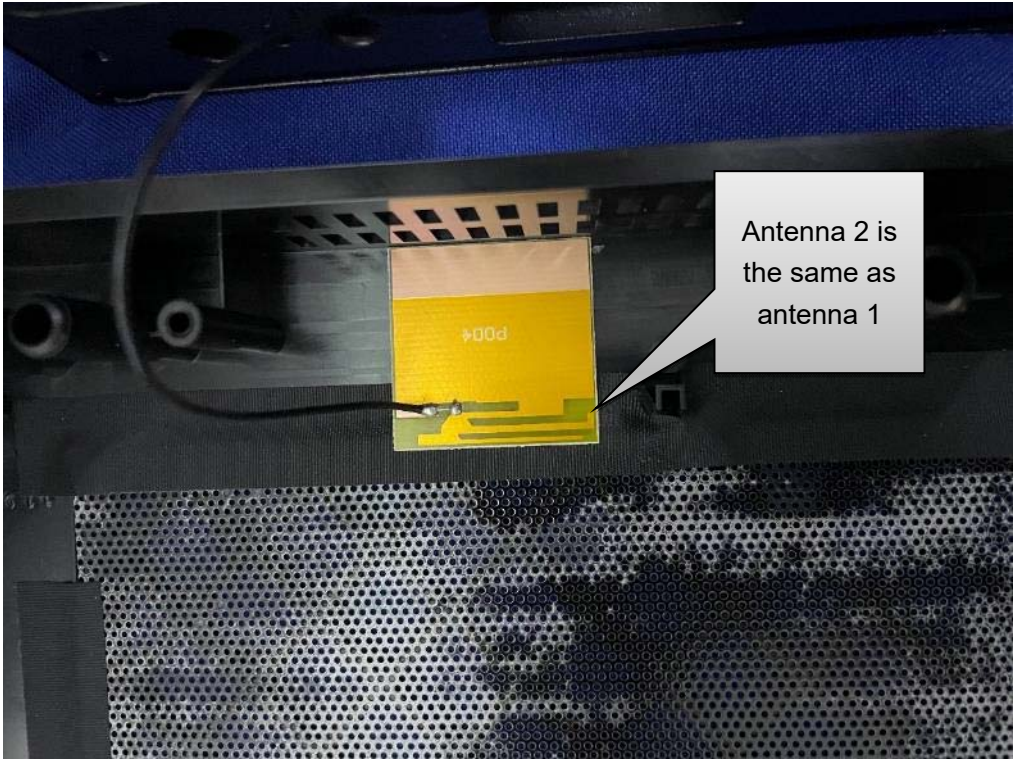

Antenna Photo

TEST REPORT

Report No.: SHE24110067-02GE

Date: 2025-03-27

Page 71 of 72

5.2 Set-up for Conducted Emissions



5.3 Set-up for Conducted RF test at Antenna Port



TEST REPORT

Report No.: SHE24110067-02GE


Date: 2025-03-27

Page 72 of 72

5.4 Set-up for Spurious Emissions below 1GHz



5.5 Set-up for Spurious Emissions above 1GHz

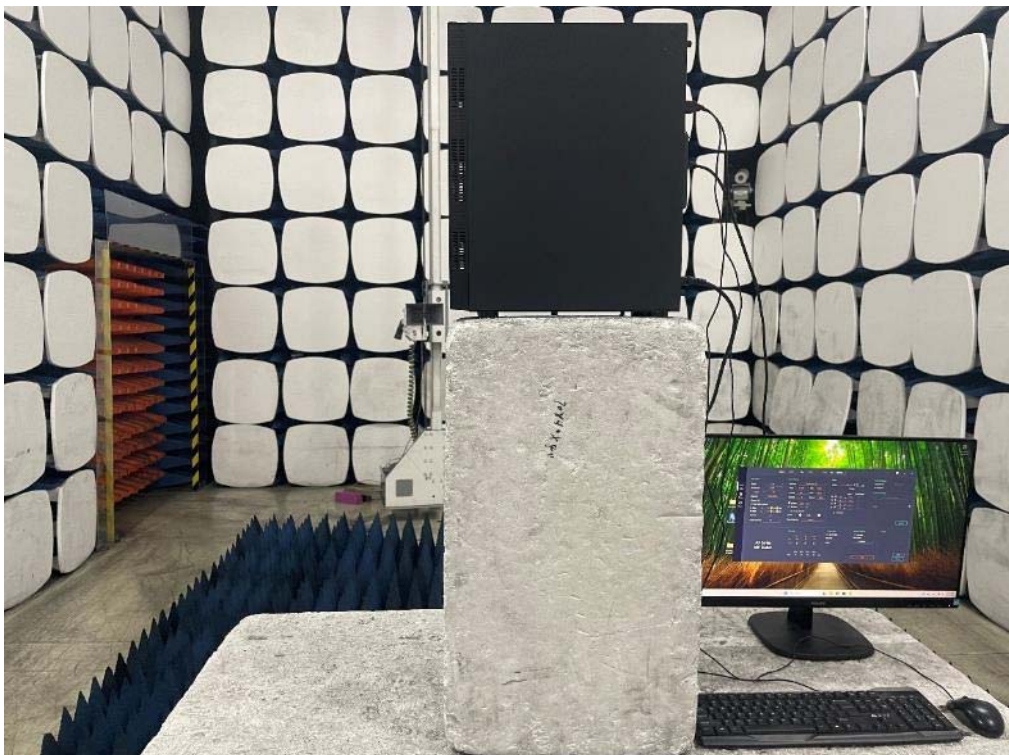

End of the report