

RF TEST REPORT

For

Shanghai Senke Electronic Technology Co,Ltd.

Product Name: Touch all in one pc

Test Model(s): SK-15A

Report Reference No. : DACE240418005RL002

FCC ID : 2BGDB-SK-15A

Applicant's Name : Shanghai Senke Electronic Technology Co,Ltd.

Address : Room 106, 1st floor Building 1, No.480 Huapu Road, Qingpu district,
Shanghai

Testing Laboratory : Shenzhen DACE Testing Technology Co., Ltd.

Address : 101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology
Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China

Test Specification Standard : 47 CFR Part 15.247
ANSI C63.10-2013 & KDB 558074 D01 15.247 Meas Guidance v05r02

Date of Receipt : April 18, 2024

Date of Test : April 18, 2024 to May 10, 2024

Data of Issue : May 10, 2024

Result : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen DACE Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen DACE Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	DACE240418005RL002	May 10, 2024

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

Keren Huang

Keren Huang / Test Engineer

Supervised by:

Stone Yin

Stone Yin / Project Engineer

Approved by:

Tom Chen

Tom Chen / Manager

CONTENTS

1	TEST SUMMARY	5
1.1	TEST STANDARDS	5
1.2	SUMMARY OF TEST RESULT	5
2	GENERAL INFORMATION	6
2.1	CLIENT INFORMATION	6
2.2	DESCRIPTION OF DEVICE (EUT)	6
2.3	DESCRIPTION OF TEST MODES	7
2.4	DESCRIPTION OF SUPPORT UNITS	8
2.5	EQUIPMENTS USED DURING THE TEST	8
2.6	STATEMENT OF THE MEASUREMENT UNCERTAINTY	10
2.7	AUTHORIZATIONS	10
2.8	ANNOUNCEMENT	10
3	EVALUATION RESULTS (EVALUATION)	11
3.1	ANTENNA REQUIREMENT	11
3.1.1	Conclusion:	11
4	RADIO SPECTRUM MATTER TEST RESULTS (RF)	12
4.1	CONDUCTED EMISSION AT AC POWER LINE	12
4.1.1	E.U.T. Operation:	12
4.1.2	Test Setup Diagram:	12
4.1.3	Test Data:	13
4.2	OCCUPIED BANDWIDTH	15
4.2.1	E.U.T. Operation:	15
4.2.2	Test Setup Diagram:	15
4.2.3	Test Data:	15
4.3	MAXIMUM CONDUCTED OUTPUT POWER	16
4.3.1	E.U.T. Operation:	16
4.3.2	Test Setup Diagram:	16
4.3.3	Test Data:	17
4.4	POWER SPECTRAL DENSITY	18
4.4.1	E.U.T. Operation:	18
4.4.2	Test Setup Diagram:	18
4.4.3	Test Data:	18
4.5	EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	19
4.5.1	E.U.T. Operation:	19
4.5.2	Test Setup Diagram:	19
4.5.3	Test Data:	19
4.6	BAND EDGE EMISSIONS (RADIATED)	20
4.6.1	E.U.T. Operation:	20
4.6.2	Test Setup Diagram:	20
4.6.3	Test Data:	21
4.7	EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz)	25
4.7.1	E.U.T. Operation:	26
4.7.2	Test Setup Diagram:	26
4.7.3	Test Data:	27
4.8	EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz)	29
4.8.1	E.U.T. Operation:	30

4.8.2	Test Setup Diagram:	30
4.8.3	Test Data:	31
5	TEST SETUP PHOTOS	34
6	PHOTOS OF THE EUT	34
APPENDIX		35
1.	-6dB BANDWIDTH	35
2.	99% OCCUPIED BANDWIDTH	48
3.	MAX. OUTPUT POWER	61
4.	POWER SPECTRAL DENSITY	74
5.	BANDEDGE	87
6.	SPURIOUS EMISSION	104

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

1.2 Summary of Test Result

Item	Method	Requirement	Result
Antenna requirement	/	47 CFR 15.203	Pass
Conducted Emission at AC power line	ANSI C63.10-2013 section 6.2	47 CFR 15.207(a)	Pass
Occupied Bandwidth	ANSI C63.10-2013, section 11.8	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	ANSI C63.10-2013, section 11.9.1	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	ANSI C63.10-2013, section 11.10	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	ANSI C63.10-2013 section 11.11	47 CFR 15.247(d), 15.209, 15.205	Pass
Band edge emissions (Radiated)	ANSI C63.10-2013 section 6.10	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	ANSI C63.10-2013 section 6.6.4	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	ANSI C63.10-2013 section 6.6.4	47 CFR 15.247(d), 15.209, 15.205	Pass

Note: 1.N/A -this device(EUT) is not applicable to this testing item
2. RF-conducted test results including cable loss.

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : Shanghai Senke Electronic Technology Co.,Ltd.
Address : Room 106, 1st floor Building 1, No.480 Huapu Road, Qingpu district, Shanghai

Manufacturer : Guangzhou Senke Electronics Co.,Ltd
Address : 201&,207-216, Building 11, No. 684,Shibei Industrial Road,Dashi Street, Panyu District, Guangzhou, Guangdong, China

2.2 Description of Device (EUT)

Product Name:	Touch all in one pc
Model/Type reference:	SK-15A
Series Model:	SK-10.4A, SK-12.1A, SK-17A, SK-19A, SK-21.5A, SK-32A, SK-43A, SK-50A, SK-55A
Model Difference:	There are multiple models of the product, and the only difference between models is the size of the display screen. The internal circuit and RF part are the same. Therefore, the test model is SK-15A.
Trade Mark:	N/A
Product Description:	Touch all in one pc
Power Supply:	DC12V-5A from adapter
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz; 802.11n(HT40): 2422MHz to 2452MHz
Number of Channels:	802.11b/g/n(HT20): 11 Channels; 802.11n(HT40): 7 Channels
Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20 and HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type:	Dual band rubber antenna
Antenna Gain:	ANT1&ANT2:2.5dBi; MIMO Gain: 5.51dBi
Hardware Version:	94V-0
Software Version:	V3.02

Note: Directional gain = $10 \cdot \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi = $10 \cdot \log[(10^{2.5/20} + 10^{2.5/20})^2 / 2]$ = 5.51 dBi

Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz
2	2417MHz	6	2437MHz	10	2457MHz
3	2422MHz	7	2442MHz	11	2462MHz
4	2427MHz	8	2447MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	BW-20MHz	BW-40MHz
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz


2.3 Description of Test Modes

No	Title	Description
TM1	802.11b mode	Keep the EUT in 802.11b-11Mbps transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g-54Mbps transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20)- MCS7 transmitting mode.
TM4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40)- MCS7 transmitting mode.


Description

- ☒ Special software is used.
- ☐ Through engineering command into the engineering mode.
engineering command: `##3646633##`
- ☐ Other method:

Special software:

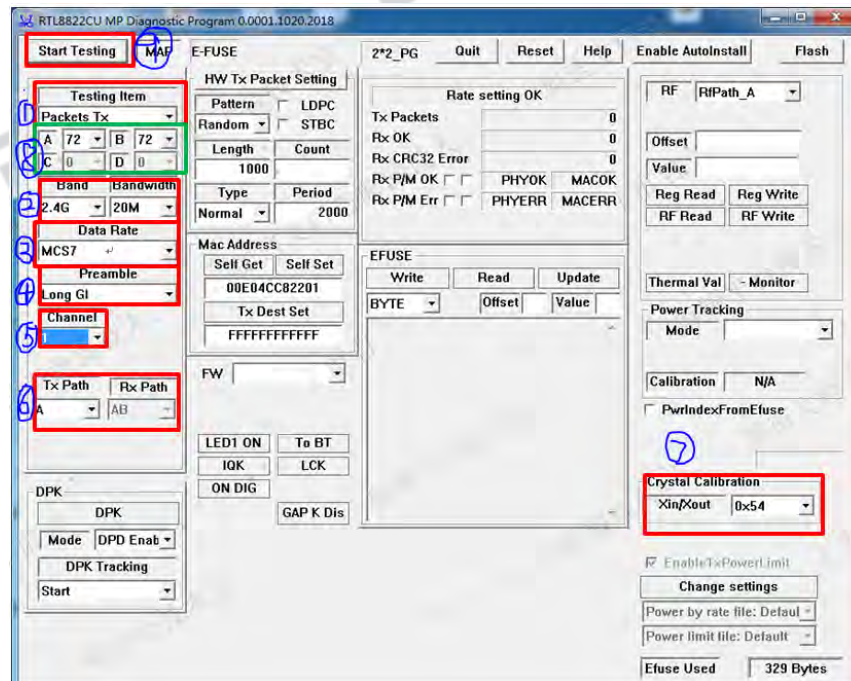

Test using the largest possible duty cycle (>98%)

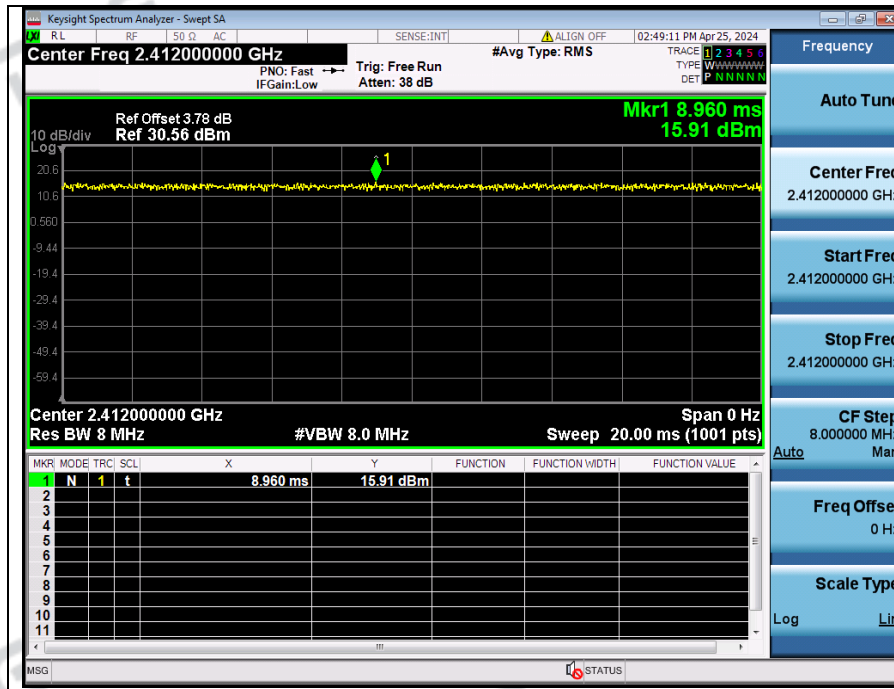

2.4 Description of Support Units

Title	Manufacturer	Model No.	Serial No.
AC-DC adapter	Shenzhen Huntkey Electric Co.,Ltd.	MODEL: HKA06012050-0A7 INPUT: 100-240V~50/60Hz,1.7A OUTPUT:12.0V5.0A,60.0W	/

2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Electric Network	SCHWARZ BECK	CAT5 8158	CAT5 8158#207	/	/
Cable	SCHWARZ BECK	/	/	2024-03-20	2025-03-19
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB Ateennator	561-G071	2023-12-12	2024-12-11
50ΩCoaxial Switch	Anritsu	MP59B	M20531	/	/
Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	ID:1164.6607 K03-102109-MH	2023-06-13	2024-06-12
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2023-12-12	2024-12-11

Occupied Bandwidth
Maximum Conducted Output Power
Power Spectral Density
Emissions in non-restricted frequency bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	Tachoy Information	RTS-01	V2.0.0.0	/	/
RF Sensor Unit	Tachoy Information	TR1029-2	000001	2023-11-09	2024-11-08
Vector signal generator	Keysight	N5181A	MY48180415	2023-11-09	2024-11-08
Signal generator	Keysight	N5182A	MY50143455	2023-11-09	2024-11-08
Spectrum Analyzer	Keysight	N9020A	MY53420323	2023-12-12	2024-12-11

Band edge emissions (Radiated)
Emissions in frequency bands (below 1GHz)
Emissions in frequency bands (above 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test software	Farad	EZ -EMC	V1.1.42	/	/
Positioning Controller	/	MF-7802	/	/	/
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2022-04-05	2025-04-04
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2023-04-05	2025-04-04
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2021-07-05	2024-07-04
Cable(LF)#2	Schwarzbeck	/	/	2024-02-19	2025-02-18
Cable(LF)#1	Schwarzbeck	/	/	2024-02-19	2025-02-18
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2024-03-20	2025-03-19
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2024-03-20	2025-03-19
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2023-06-13	2024-06-12
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2023-06-13	2024-06-12
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2023-06-14	2024-06-13
Horn Antenna	Sunol Sciences	DRH-118	A091114	2023-05-13	2025-05-12
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2023-05-21	2025-05-20
Test Receiver	R&S	ESCI	102109	2023-06-13	2024-06-12

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	$\pm 3.41\text{dB}$
Occupied Bandwidth	$\pm 3.63\%$
RF conducted power	$\pm 0.733\text{dB}$
RF power density	$\pm 0.234\%$
Conducted Spurious emissions	$\pm 1.98\text{dB}$
Radiated Emission (Above 1GHz)	$\pm 5.46\text{dB}$
Radiated Emission (Below 1GHz)	$\pm 5.79\text{dB}$
Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

2.7 Authorizations

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252

Identification of the Responsible Testing Location

Company Name:	Shenzhen DACE Testing Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
FCC Registration Number:	0032847402
Designation Number:	CN1342
Test Firm Registration No.:	778666
A2LA Certificate Number:	6270.01

2.8 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by DACE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) We hereby declare that the laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant. the laboratory is not responsible for the accuracy of the information provided by the client. When the information provided by the customer may affect the effectiveness of the results, the responsibility lies with the customer, and the laboratory does not assume any responsibility.

3 Evaluation Results (Evaluation)

3.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

3.1.1 Conclusion:



4 Radio Spectrum Matter Test Results (RF)


4.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.10-2013 section 6.2		
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices Note: 1. An initial pre-scan was performed on the line and neutral lines with peak detector. 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission. 3. Measurement Level = Reading level + Correct Factor, Over = Measurement - Limit 4. When EUT is charging, it cannot transmit signals.		

4.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	54.2 %	Atmospheric Pressure:	102 kPa
Pretest mode:		TM1, TM2, TM3, TM4			
Final test mode:		TM3(worse case)			

4.1.2 Test Setup Diagram:

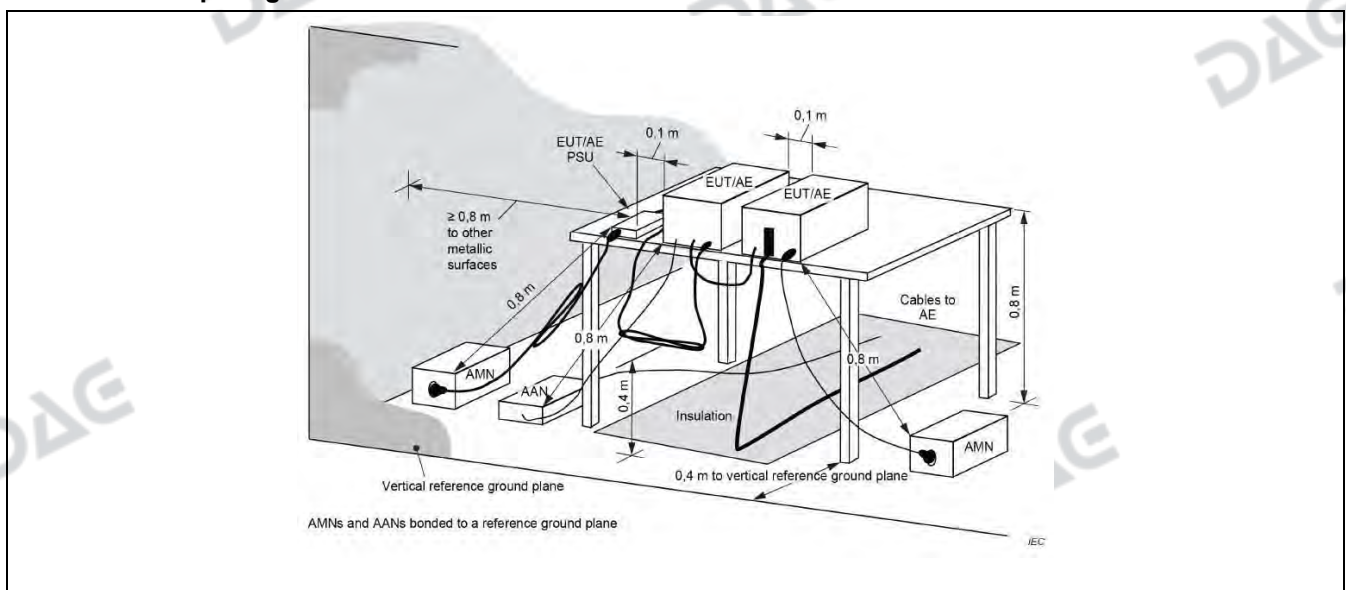


4.1.3 Test Data:

TM3 / Line: Line / Band: 2400-2483.5 MHz / BW: 20 / CH: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	43.85	10.05	53.90	65.99	-12.09	QP	
2		0.1500	28.76	10.05	38.81	55.99	-17.18	AVG	
3		0.4260	28.60	9.99	38.59	57.33	-18.74	QP	
4		0.4260	24.76	9.99	34.75	47.33	-12.58	AVG	
5		0.7700	19.33	9.95	29.28	56.00	-26.72	QP	
6		0.7940	13.28	9.95	23.23	46.00	-22.77	AVG	
7		3.5220	25.80	10.06	35.86	56.00	-20.14	QP	
8		3.5780	11.86	10.06	21.92	46.00	-24.08	AVG	
9		10.2500	27.32	10.42	37.74	60.00	-22.26	QP	
10		10.5460	18.64	10.43	29.07	50.00	-20.93	AVG	
11		13.7460	21.03	10.44	31.47	50.00	-18.53	AVG	
12		13.7860	30.69	10.44	41.13	60.00	-18.87	QP	

TM3 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: H

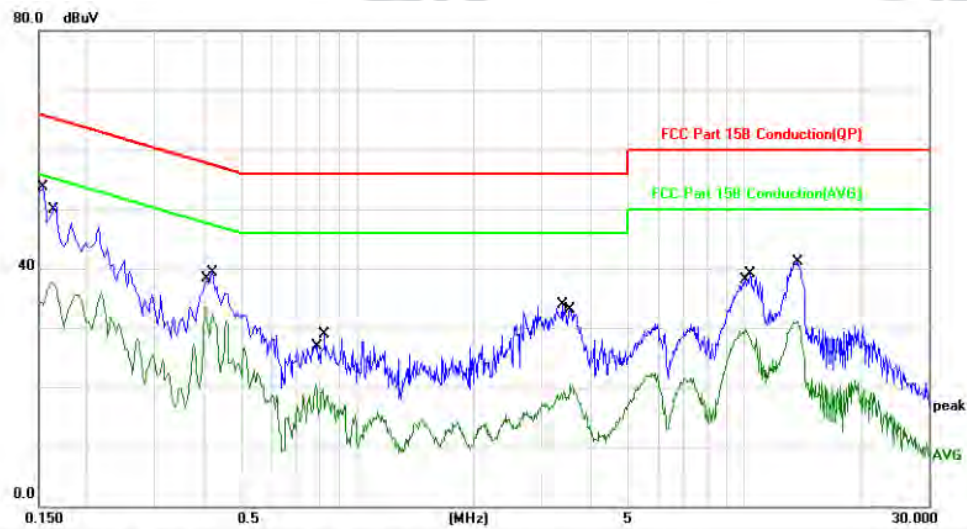

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1539	43.62	10.05	53.67	65.78	-12.11	QP	
2		0.1620	27.69	10.03	37.72	55.36	-17.64	AVG	
3		0.4060	23.43	10.00	33.43	47.73	-14.30	AVG	
4		0.4220	29.23	9.99	39.22	57.41	-18.19	QP	
5		0.7820	10.47	9.95	20.42	46.00	-25.58	AVG	
6		0.8260	18.91	9.94	28.85	56.00	-27.15	QP	
7		3.3900	23.88	10.05	33.93	56.00	-22.07	QP	
8		3.5580	10.48	10.06	20.54	46.00	-25.46	AVG	
9		10.1059	19.21	10.42	29.63	50.00	-20.37	AVG	
10		10.3460	28.62	10.42	39.04	60.00	-20.96	QP	
11		13.7180	20.72	10.44	31.16	50.00	-18.84	AVG	
12		13.7860	30.73	10.44	41.17	60.00	-18.83	QP	

Remark: Over= Measurement Level – Limit; Measurement Level =Receiver reading Level + correction factor


4.2 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8
Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	54.2 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.2.2 Test Setup Diagram:

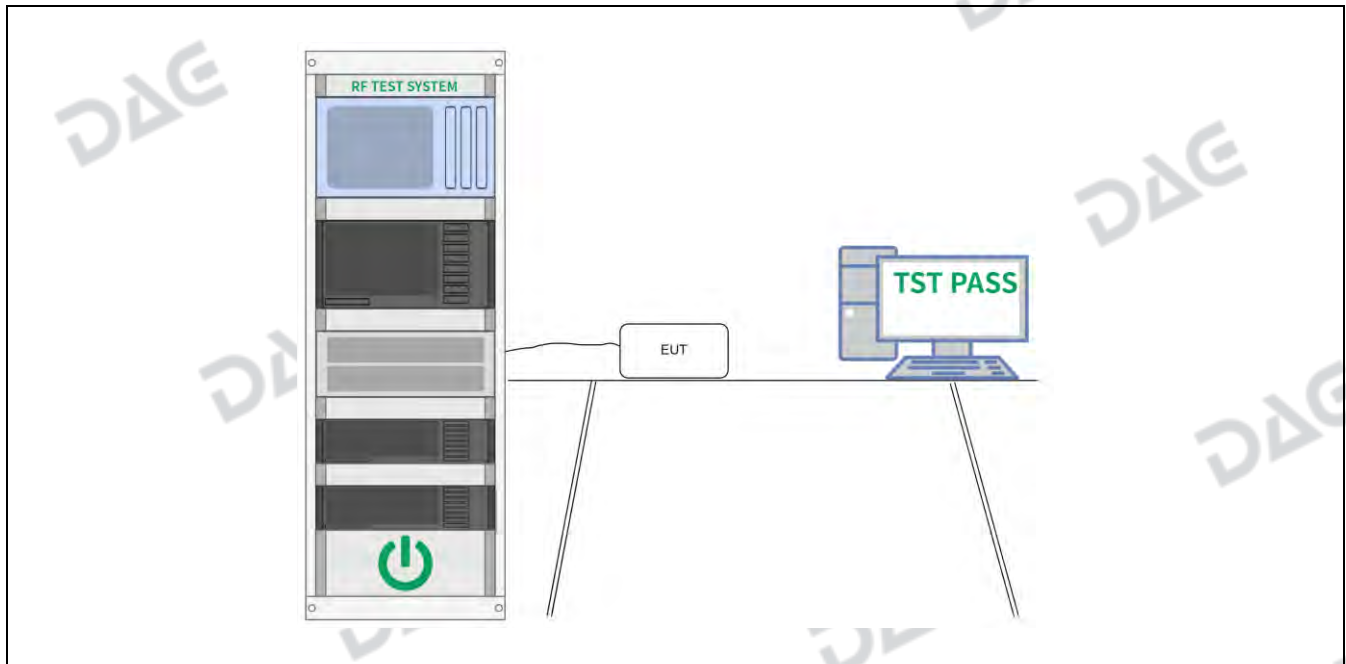

4.2.3 Test Data:

Please Refer to Appendix for Details.

4.3 Maximum Conducted Output Power


Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1
Procedure:	ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power Note: Per ANSI C63.10-2013, if there are two or more antnnas, the conducted powers at Core 0, Core 1,..., Core i were first measured separately, as shown in the section above(this product oly have one antenna). The measured values were then summed in linear power units then converted back to dBm. Per ANSI C63.10-2013 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used. For correlated unequal antenna gain Directional gain = $10 \cdot \log[(10G1/20 + 10G2/20 + \dots + 10GN/20)^2 / NANT]$ dBi For completely uncorrelated unequal antenna gain Directional gain = $10 \cdot \log[(10G1/10 + 10G2/10 + \dots + 10GN/10) / NANT]$ dBi Sample Multiple antennas Calculation: Core 0 + Core 1 +...Core i. = MIMO/CDD (i is the number of antennas) (#VALUE! mW + mW) = #VALUE! mW = dBm Sample e.i.r.p. Calculation: e.i.r.p. (dBm) = Conducted Power (dBm) + Ant gain (dBi)

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	54.2 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.3.2 Test Setup Diagram:

--

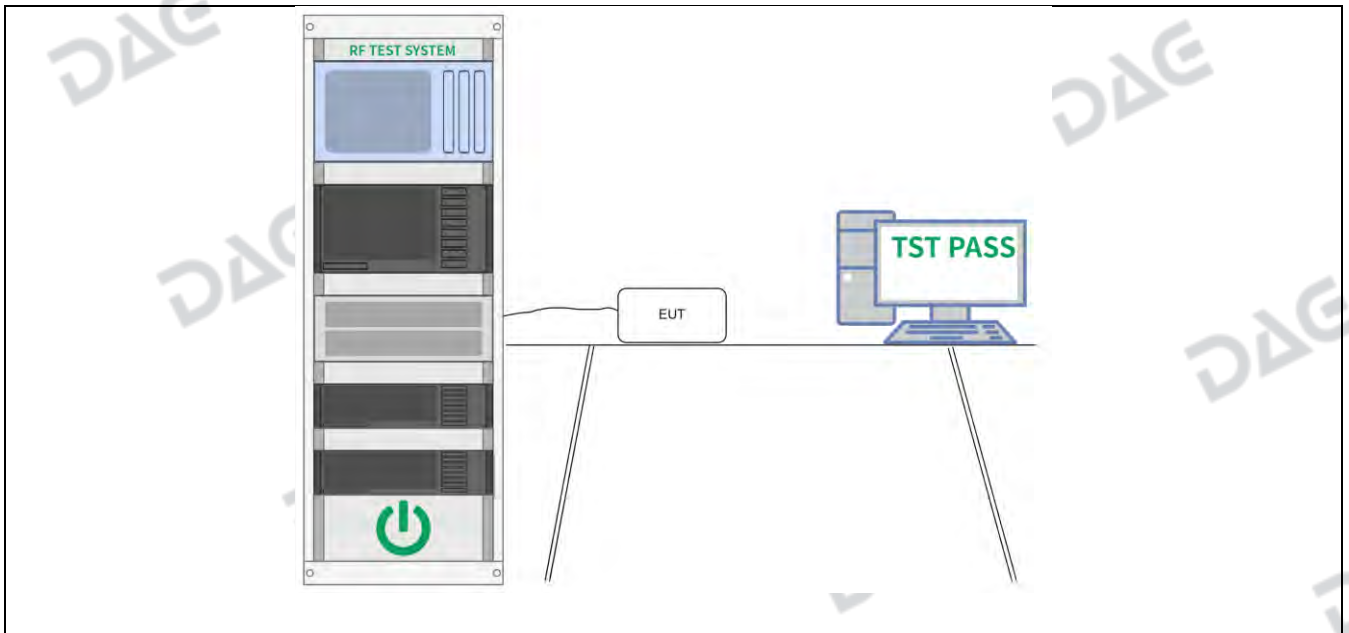

4.3.3 Test Data:

Please Refer to Appendix for Details.


4.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission

4.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	54.2 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.4.2 Test Setup Diagram:

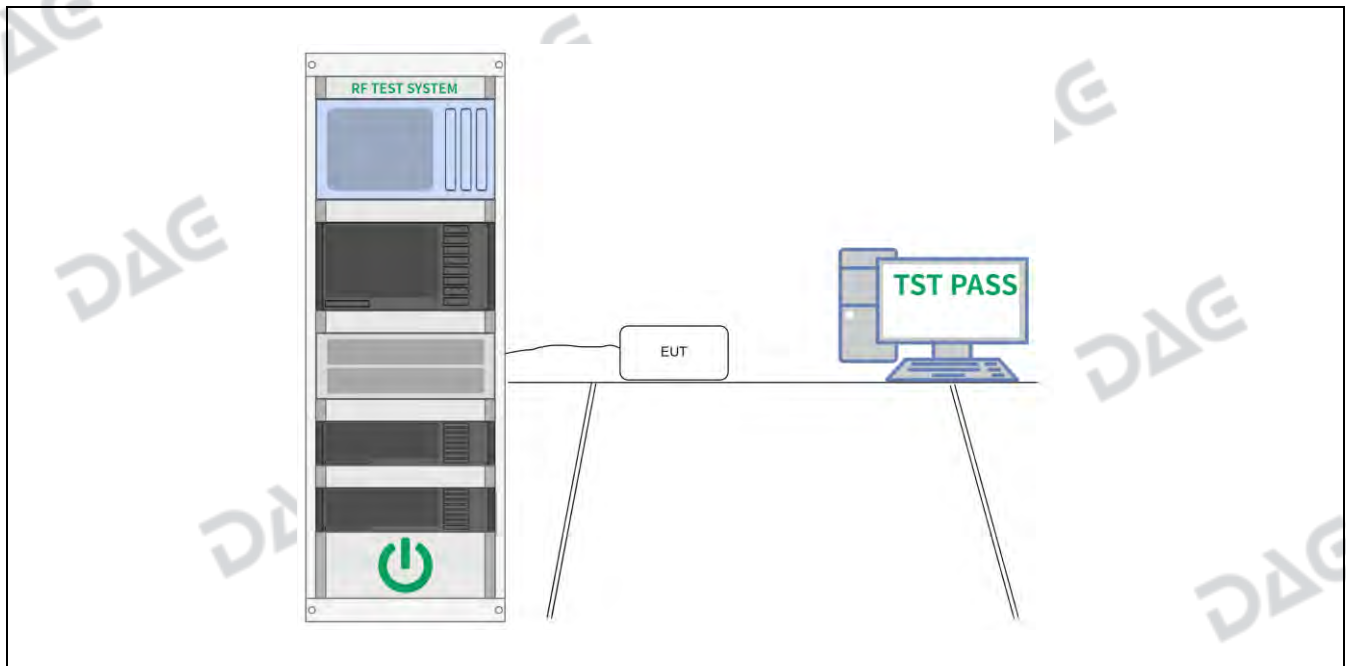

4.4.3 Test Data:

Please Refer to Appendix for Details.


4.5 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

4.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	54.2 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM1, TM2, TM3, TM4				

4.5.2 Test Setup Diagram:

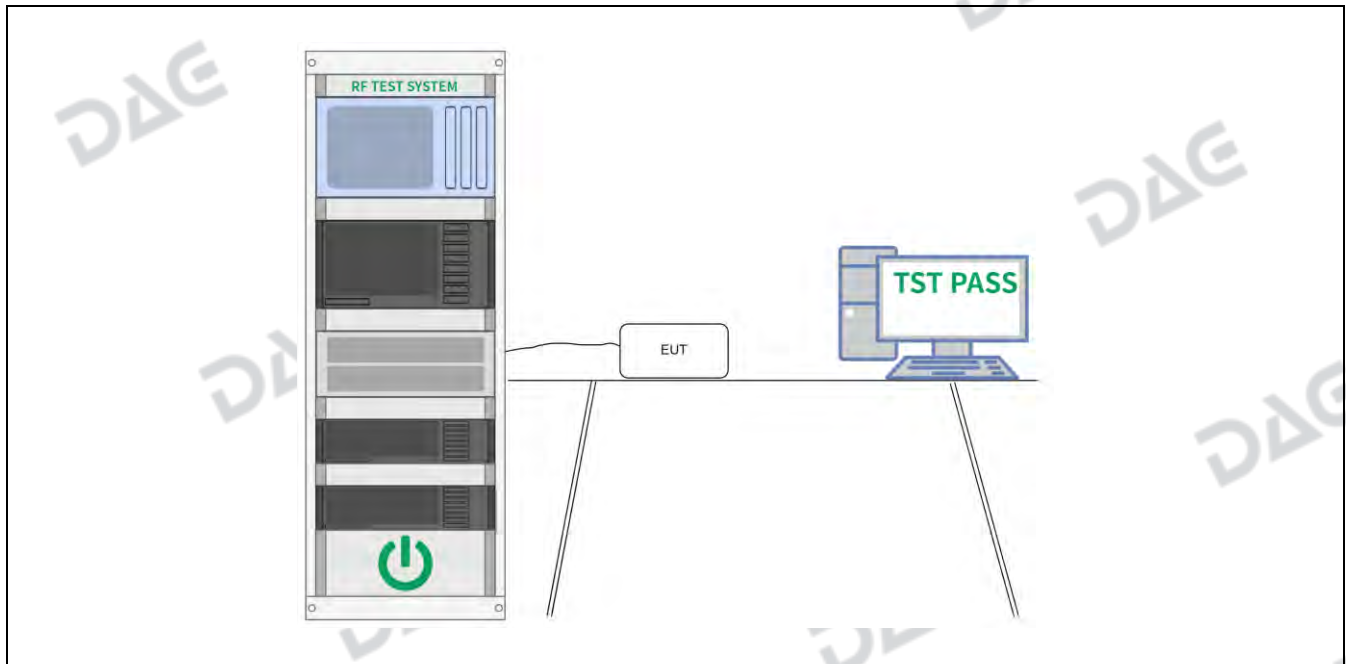

4.5.3 Test Data:

Please Refer to Appendix for Details.


4.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2013 section 6.10		
Procedure:	ANSI C63.10-2013 section 6.10.5.2 Remark: Measurement Level = Reading level + Correct Factor, Margin= Measurement Level – Limit; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier		

4.6.1 E.U.T. Operation:


Operating Environment:					
Temperature:	22.9 °C	Humidity:	54.2 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM3-MIMO, TM4-MIMO(worse case)				

4.6.2 Test Setup Diagram:

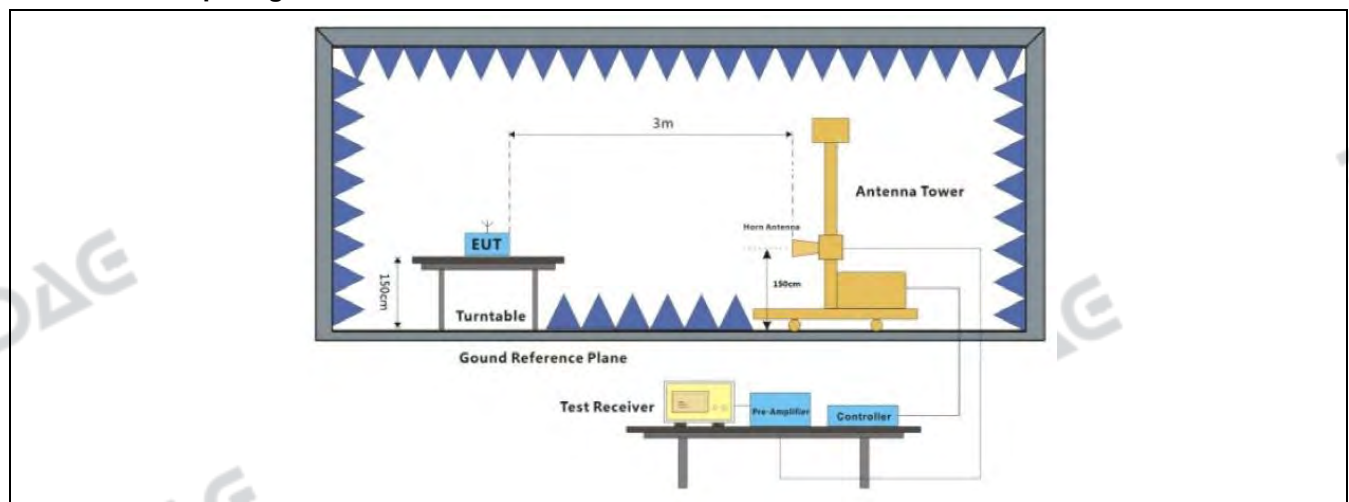


4.6.3 Test Data:

TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

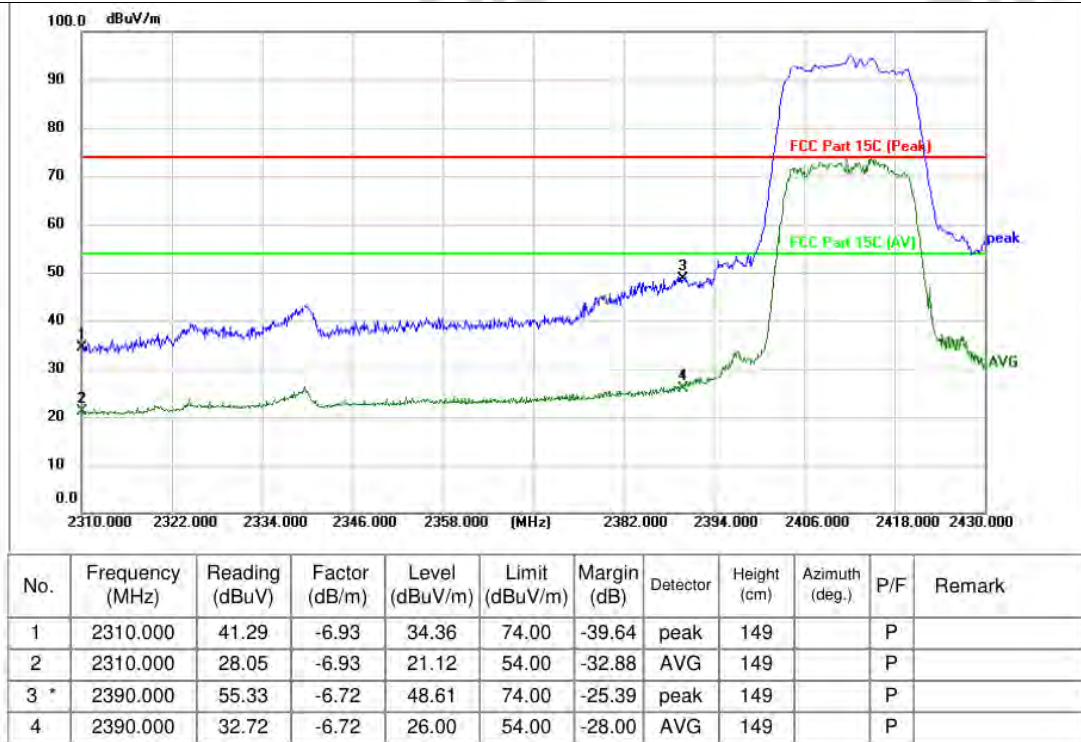

TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

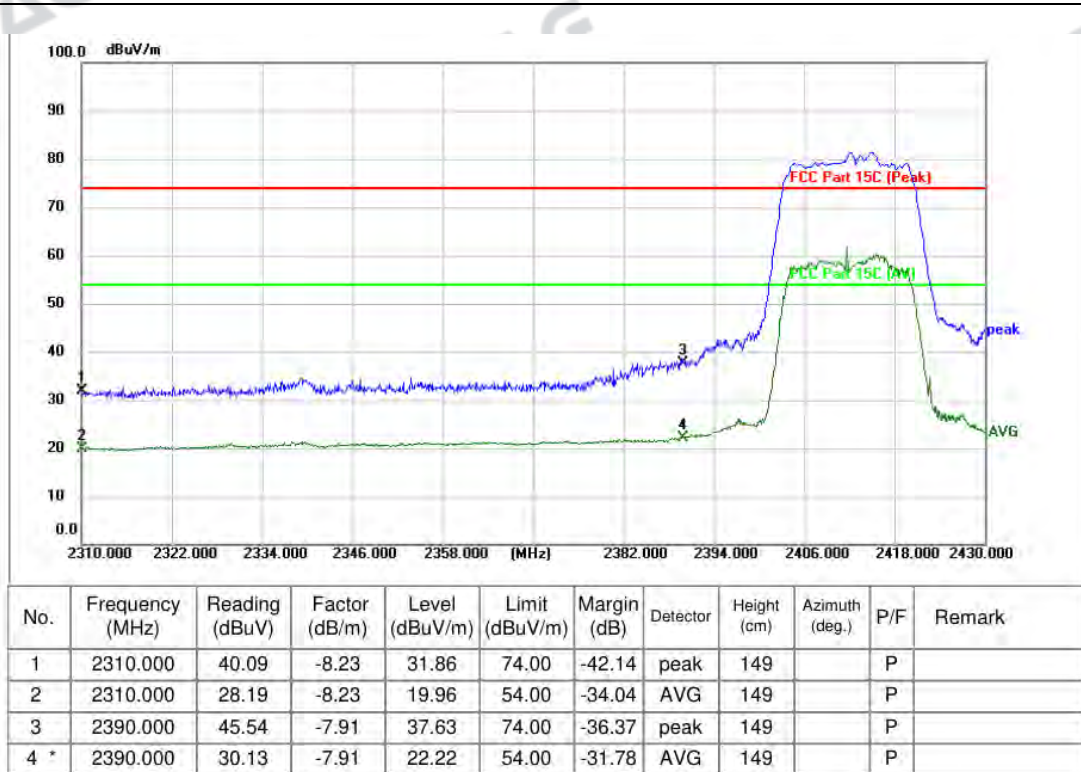


TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	66.27	-6.47	59.80	74.00	-14.20	peak	149		P	
2	2483.500	38.67	-6.47	32.20	54.00	-21.80	AVG	149		P	
3	2500.000	49.82	-6.43	43.39	74.00	-30.61	peak	149		P	
4	2500.000	30.48	-6.43	24.05	54.00	-29.95	AVG	149		P	

TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

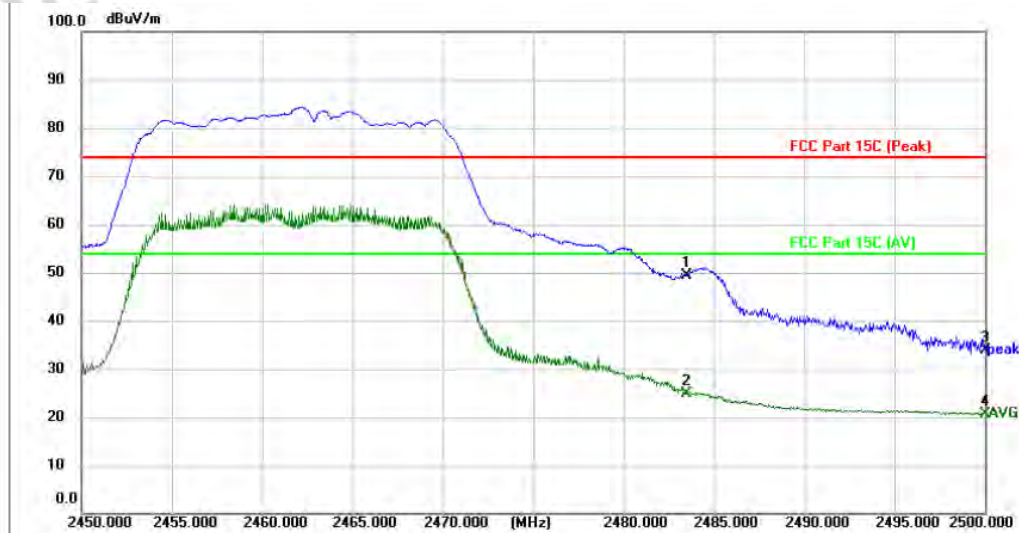


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2483.500	57.03	-7.54	49.49	74.00	-24.51	peak	149		P	
2	2483.500	32.37	-7.54	24.83	54.00	-29.17	AVG	149		P	
3	2500.000	41.43	-7.48	33.95	74.00	-40.05	peak	149		P	
4	2500.000	28.15	-7.48	20.67	54.00	-33.33	AVG	149		P	

TM4 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 40 / CH: L

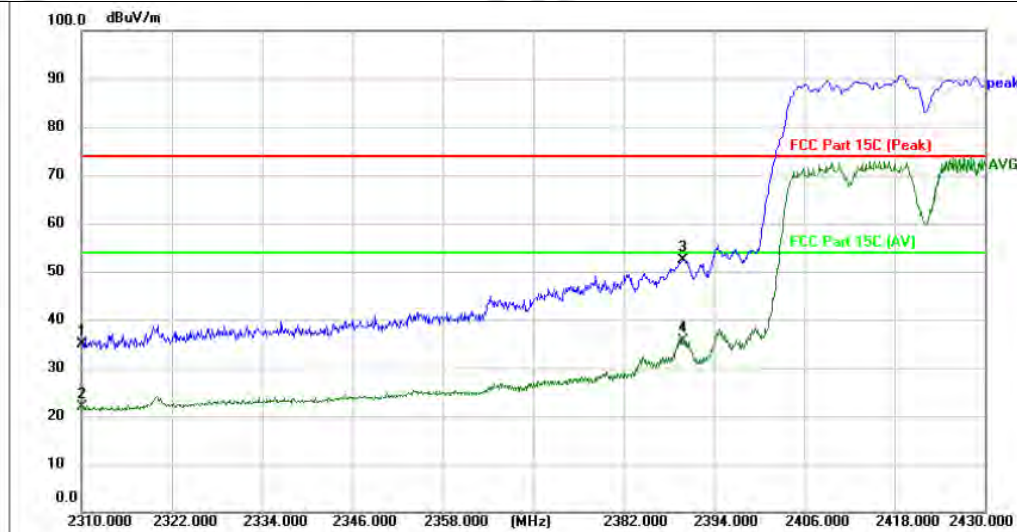


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	41.77	-6.93	34.84	74.00	-39.16	peak	149		P	
2	2310.000	28.80	-6.93	21.87	54.00	-32.13	AVG	149		P	
3	2390.000	59.19	-6.72	52.47	74.00	-21.53	peak	149		P	
4 *	2390.000	42.31	-6.72	35.59	54.00	-18.41	AVG	149		P	

TM4 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 40 / CH: L

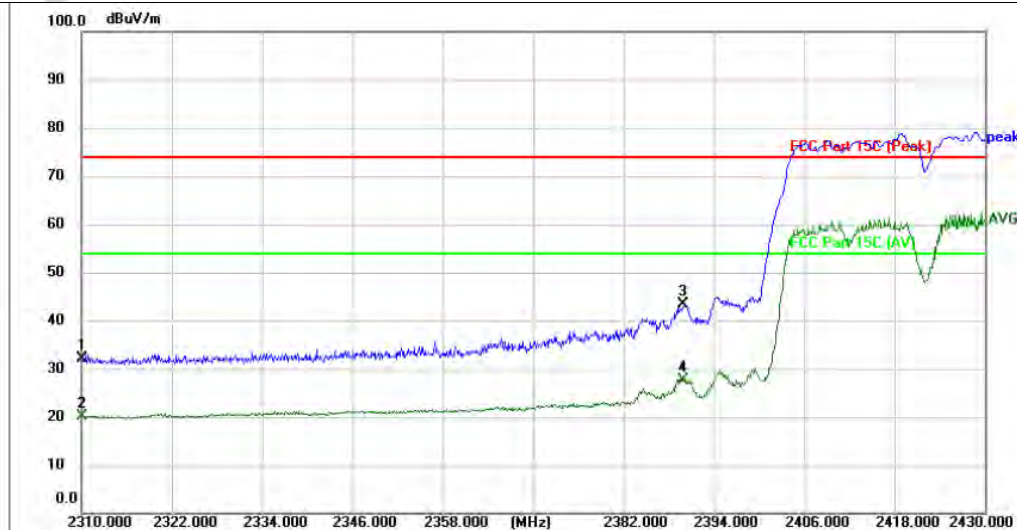


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	40.36	-8.23	32.13	74.00	-41.87	peak	149		P	
2	2310.000	28.31	-8.23	20.08	54.00	-33.92	AVG	149		P	
3	2390.000	51.24	-7.91	43.33	74.00	-30.67	peak	149		P	
4 *	2390.000	35.53	-7.91	27.62	54.00	-26.38	AVG	149		P	

TM4 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 40 / CH: H

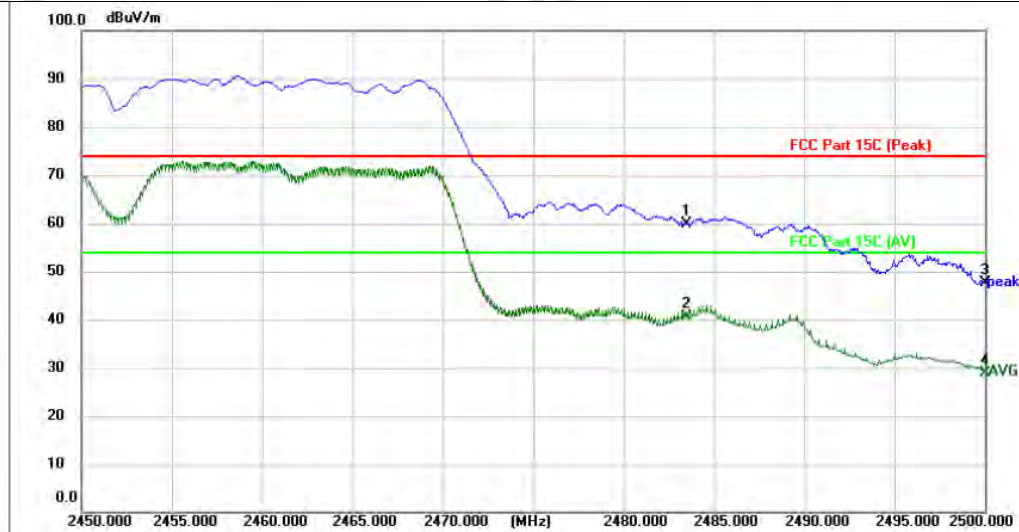

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	66.47	-6.47	60.00	74.00	-14.00	peak	149		P	
2 *	2483.500	47.01	-6.47	40.54	54.00	-13.46	AVG	149		P	
3	2500.000	53.98	-6.43	47.55	74.00	-26.45	peak	149		P	
4	2500.000	35.43	-6.43	29.00	54.00	-25.00	AVG	149		P	

TM4 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 40 / CH: H

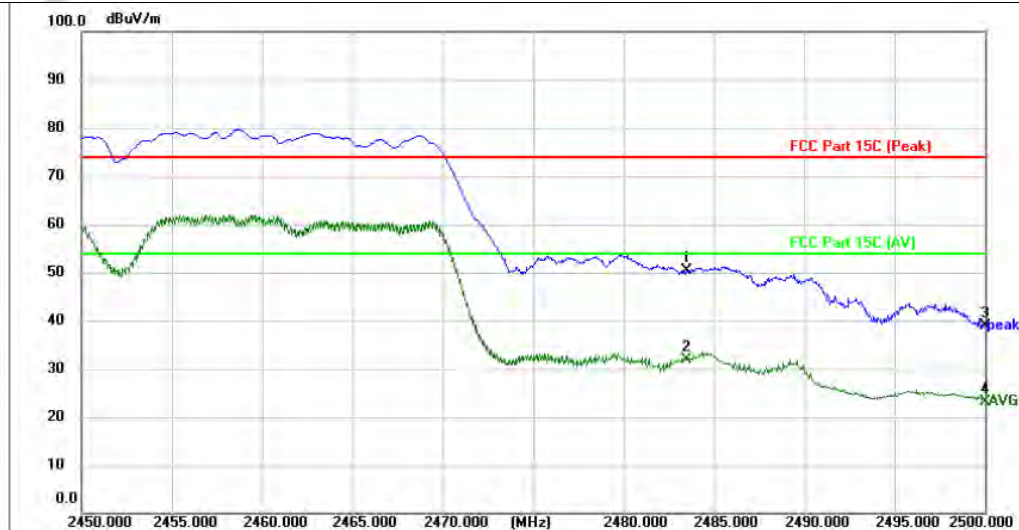

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	57.83	-7.54	50.29	74.00	-23.71	peak	149		P	
2 *	2483.500	39.49	-7.54	31.95	54.00	-22.05	AVG	149		P	
3	2500.000	46.31	-7.48	38.83	74.00	-35.17	peak	149		P	
4	2500.000	30.69	-7.48	23.21	54.00	-30.79	AVG	149		P	

1. Margin = Measurement Level - Limit ; Measurement Level=Test receiver reading + correction factor

2.The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.

4.7 Emissions in frequency bands (below 1GHz)


Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2013 section 6.6.4		
Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel, the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete. Remark: 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report. 2) The field strength is calculated by adding the Antenna Factor, Cable Factor &		

	Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level =Receiver Reading + Antenna Factor + Cable Factor +C Preamplifier Factor 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.
--	--

4.7.1 E.U.T. Operation:


Operating Environment:					
Temperature:	22.9 °C	Humidity:	54.2 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM3-MIMO mode(worse case)				

4.7.2 Test Setup Diagram:

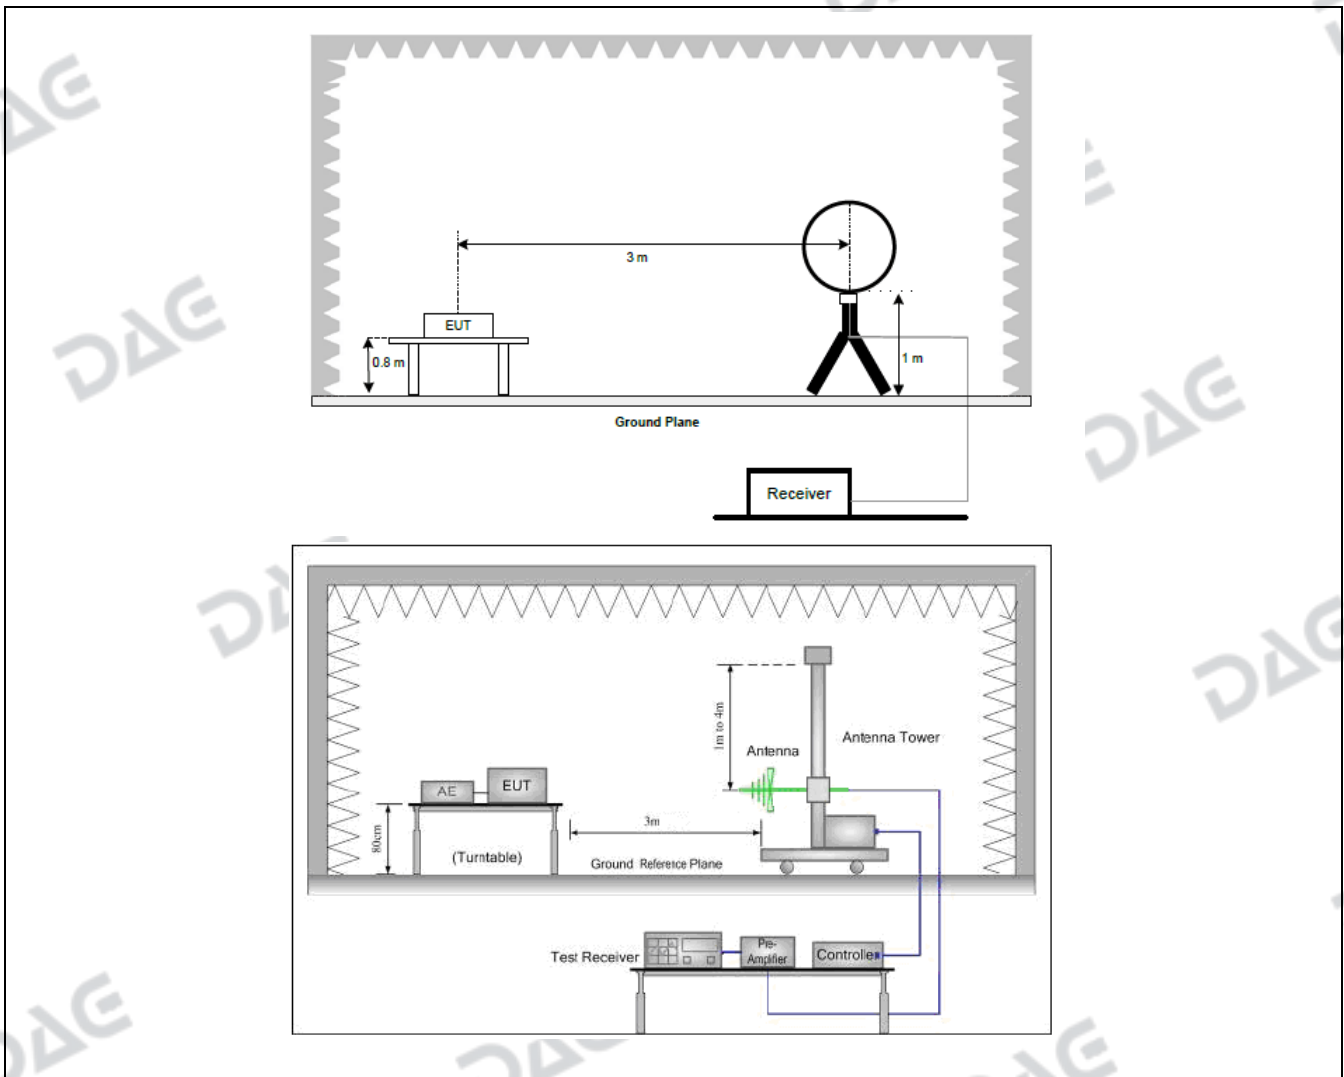


4.7.3 Test Data:

TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

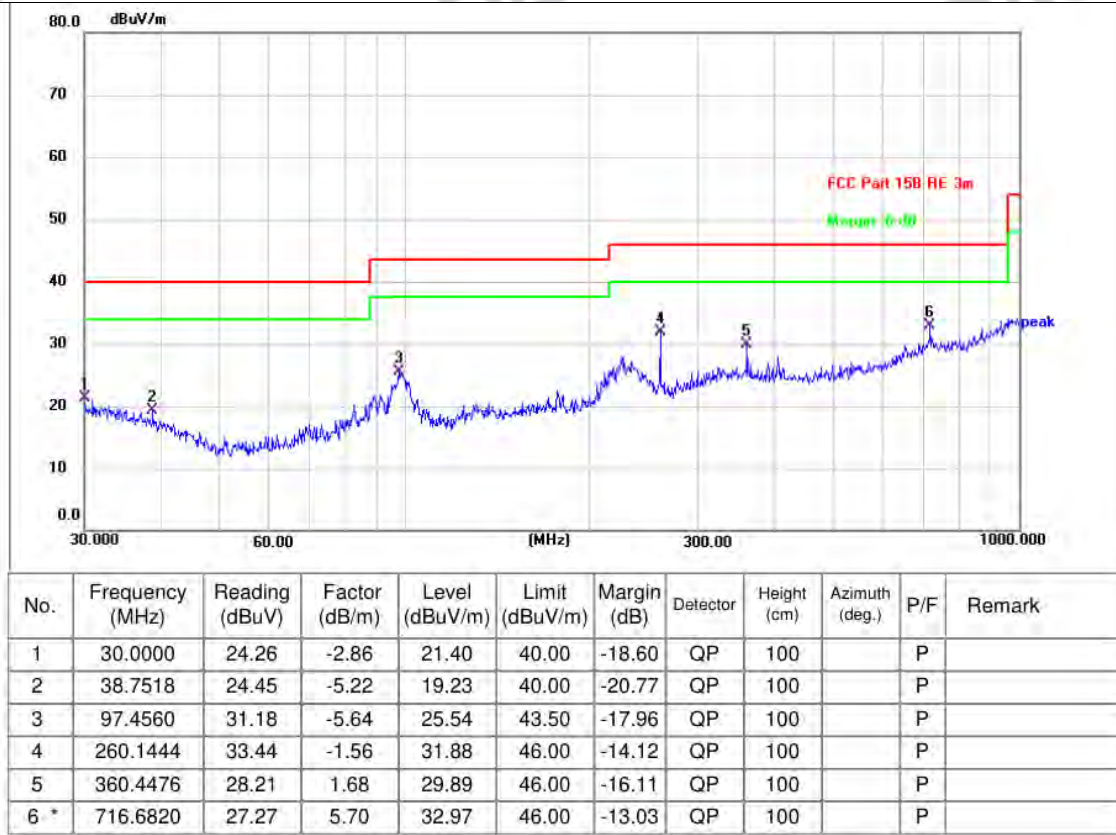

TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H

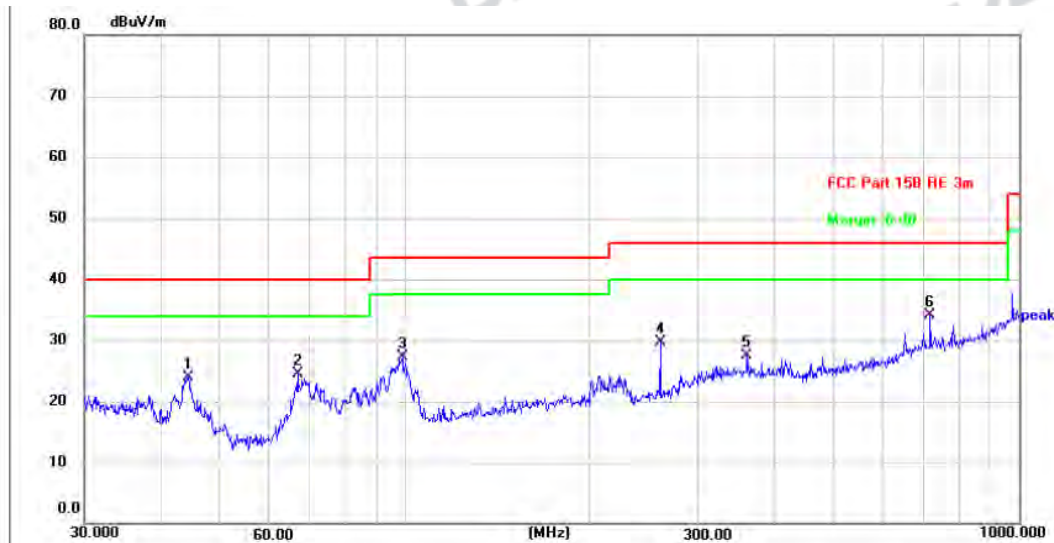

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.2752	31.29	-7.39	23.90	40.00	-16.10	QP	100		P	
2	66.7325	33.29	-8.72	24.57	40.00	-15.43	QP	100		P	
3	98.8326	32.96	-5.59	27.37	43.50	-16.13	QP	100		P	
4	260.1444	31.34	-1.72	29.62	46.00	-16.38	QP	100		P	
5	360.4476	26.61	0.89	27.50	46.00	-18.50	QP	100		P	
6 *	716.6820	29.01	5.08	34.09	46.00	-11.91	QP	100		P	

Remark:

- 1.Margin= Measurement Level- Limit; Measurement Level=Test receiver reading + correction factor
- 2.The EMC test software will only record the worst test angle and height, and only the worst case will be record edin the test report.

4.8 Emissions in frequency bands (above 1GHz)


Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2013 section 6.6.4		
Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel, the middle channel, the Highest channel. i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete. Remark: 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report. 2) The field strength is calculated by adding the Antenna Factor, Cable Factor &		

	Preamplifier. The basic equation with a sample calculation is as follows: Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + C Preamplifier Factor 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.
--	--

4.8.1 E.U.T. Operation:


Operating Environment:					
Temperature:	22.9 °C	Humidity:	54.2 %	Atmospheric Pressure:	102 kPa
Pretest mode:	TM1, TM2, TM3, TM4				
Final test mode:	TM3-MIMO mode(worse case)				

4.8.2 Test Setup Diagram:

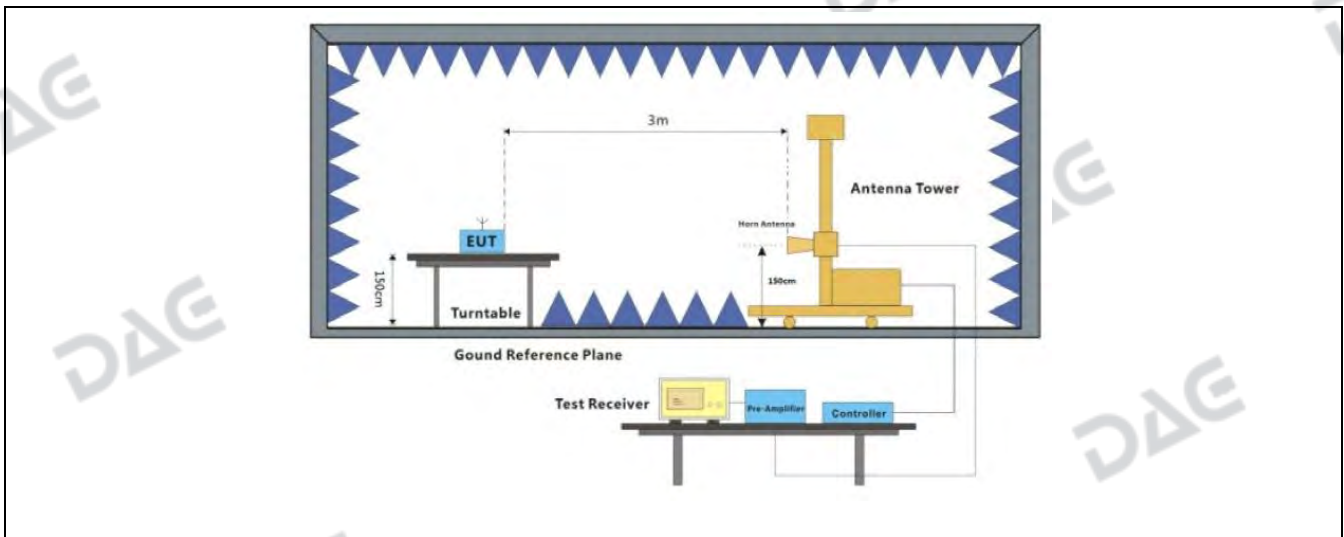


4.8.3 Test Data:


TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

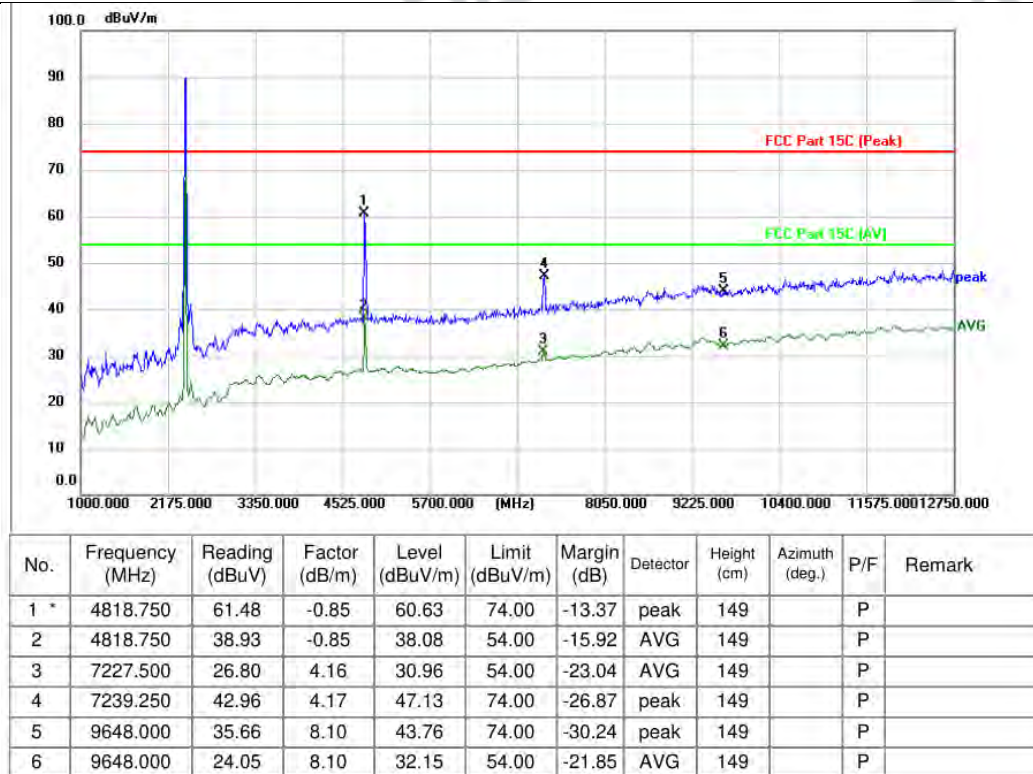

TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

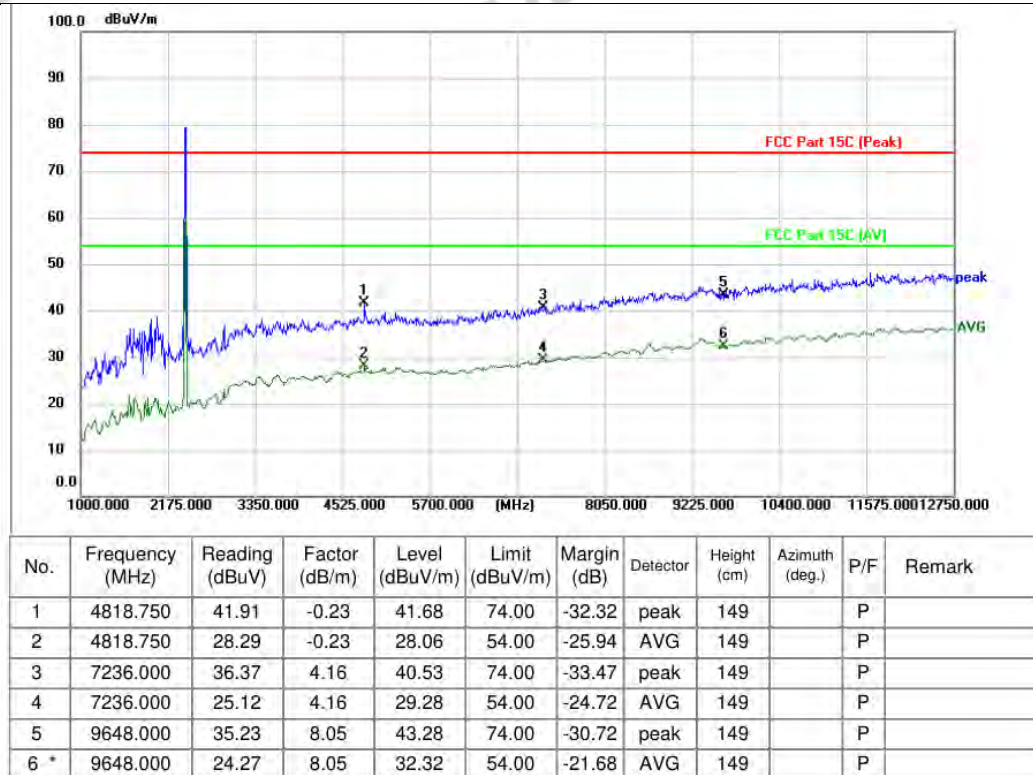


TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: M

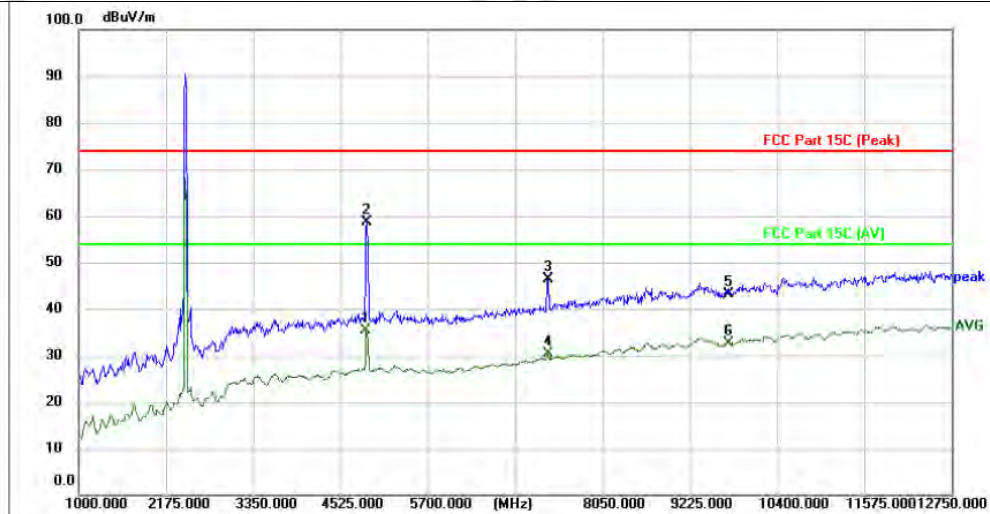


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4865.750	36.01	-0.69	35.32	54.00	-18.68	AVG	149		P	
2 *	4877.500	59.17	-0.65	58.52	74.00	-15.48	peak	149		P	
3	7321.500	42.17	4.31	46.48	74.00	-27.52	peak	149		P	
4	7321.500	26.16	4.31	30.47	54.00	-23.53	AVG	149		P	
5	9748.000	35.01	8.10	43.11	74.00	-30.89	peak	149		P	
6	9748.000	24.55	8.10	32.65	54.00	-21.35	AVG	149		P	


TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: M

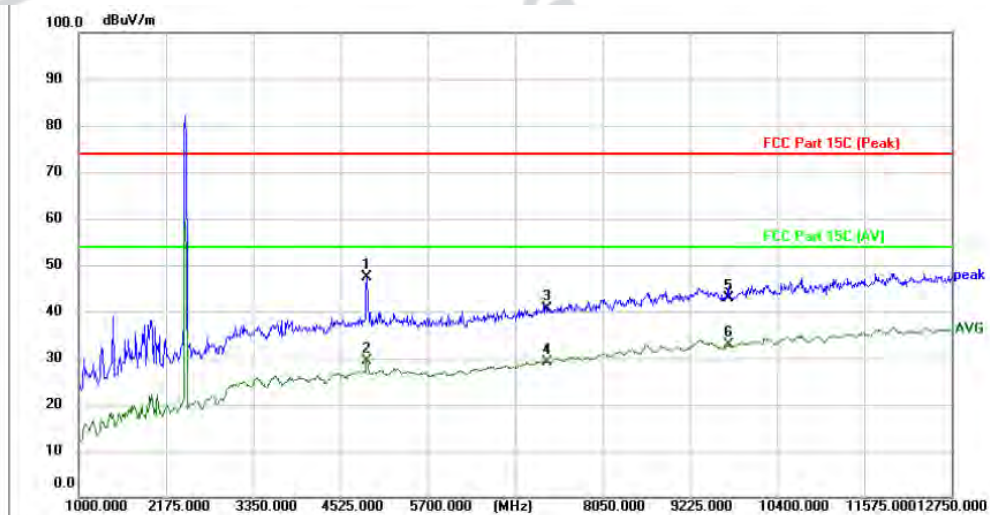

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4877.500	47.46	-0.04	47.42	74.00	-26.58	peak	149		P	
2	4877.500	29.34	-0.04	29.30	54.00	-24.70	AVG	149		P	
3	7311.000	36.21	4.34	40.55	74.00	-33.45	peak	149		P	
4	7311.000	24.79	4.34	29.13	54.00	-24.87	AVG	149		P	
5	9748.000	34.76	8.12	42.88	74.00	-31.12	peak	149		P	
6 *	9748.000	24.65	8.12	32.77	54.00	-21.23	AVG	149		P	

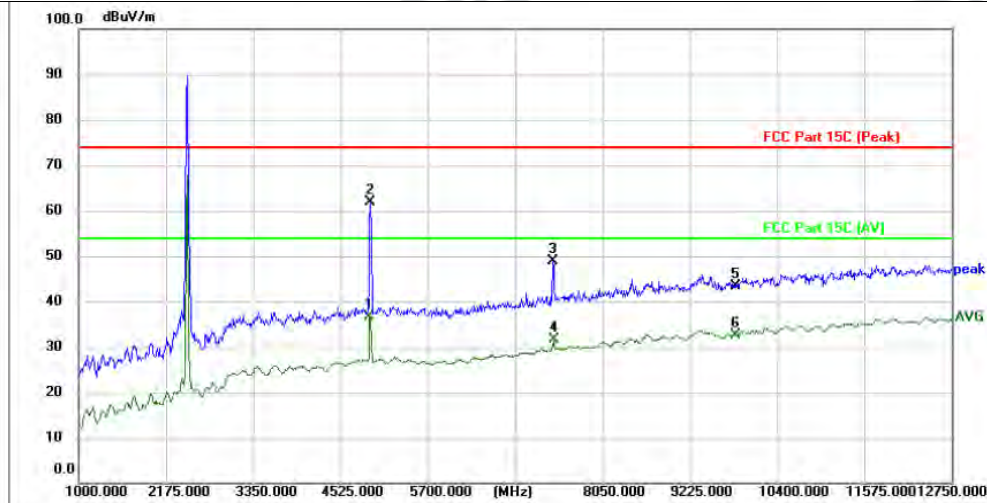TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4912.750	37.26	-0.53	36.73	54.00	-17.27	AVG	149		P	
2 *	4924.500	62.37	-0.50	61.87	74.00	-12.13	peak	149		P	
3	7380.250	44.44	4.39	48.83	74.00	-25.17	peak	149		P	
4	7392.000	27.11	4.42	31.53	54.00	-22.47	AVG	149		P	
5	9848.000	35.36	8.10	43.46	74.00	-30.54	peak	149		P	
6	9848.000	24.63	8.10	32.73	54.00	-21.27	AVG	149		P	

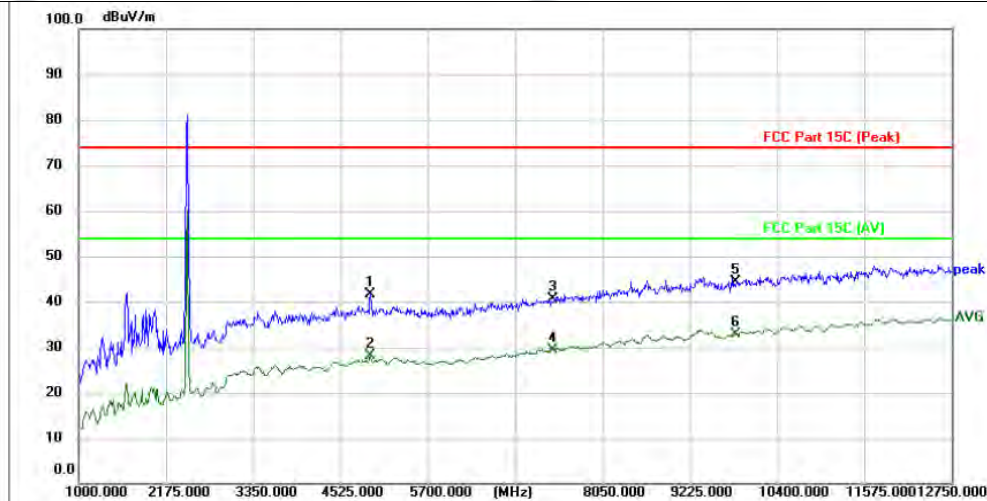TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4924.500	41.41	0.11	41.52	74.00	-32.48	peak			P	
2	4924.500	28.13	0.11	28.24	54.00	-25.76	AVG			P	
3	7386.000	36.04	4.52	40.56	74.00	-33.44	peak			P	
4	7386.000	24.85	4.52	29.37	54.00	-24.63	AVG			P	
5	9848.000	36.19	8.19	44.38	74.00	-29.62	peak			P	
6 *	9848.000	24.78	8.19	32.97	54.00	-21.03	AVG			P	

Remark: 1.Margin= Level – Limit; Level=Test receiver reading + correction factor

2.The test software will only record the worst test angle and height, and only the worst case will be recorded in the test report.

5 TEST SETUP PHOTOS

Please Refer to test setup file for Details.

6 PHOTOS OF THE EUT


Please Refer to internal photos file and internal photos file for Details.

Appendix


1. -6dB Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	-6dB BW(MHz)	limit(kHz)	Result
NVNT	ANT1	802.11b	2412.00	10.24	500	Pass
NVNT	ANT1	802.11b	2437.00	10.24	500	Pass
NVNT	ANT1	802.11b	2462.00	10.23	500	Pass
NVNT	ANT2	802.11b	2412.00	10.61	500	Pass
NVNT	ANT2	802.11b	2437.00	11.03	500	Pass
NVNT	ANT2	802.11b	2462.00	11.02	500	Pass
NVNT	ANT1	802.11g	2412.00	16.51	500	Pass
NVNT	ANT1	802.11g	2437.00	16.51	500	Pass
NVNT	ANT1	802.11g	2462.00	16.51	500	Pass
NVNT	ANT2	802.11g	2412.00	15.46	500	Pass
NVNT	ANT2	802.11g	2437.00	15.46	500	Pass
NVNT	ANT2	802.11g	2462.00	15.45	500	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	17.73	500	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	17.74	500	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	17.73	500	Pass
NVNT	ANT2	802.11n(HT20)	2412.00	17.34	500	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	17.34	500	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	16.56	500	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	36.42	500	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	36.42	500	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	36.43	500	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	35.21	500	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	35.21	500	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	35.21	500	Pass


-6dB_Bandwidth_NVNT_ANT1_802_11b_2412

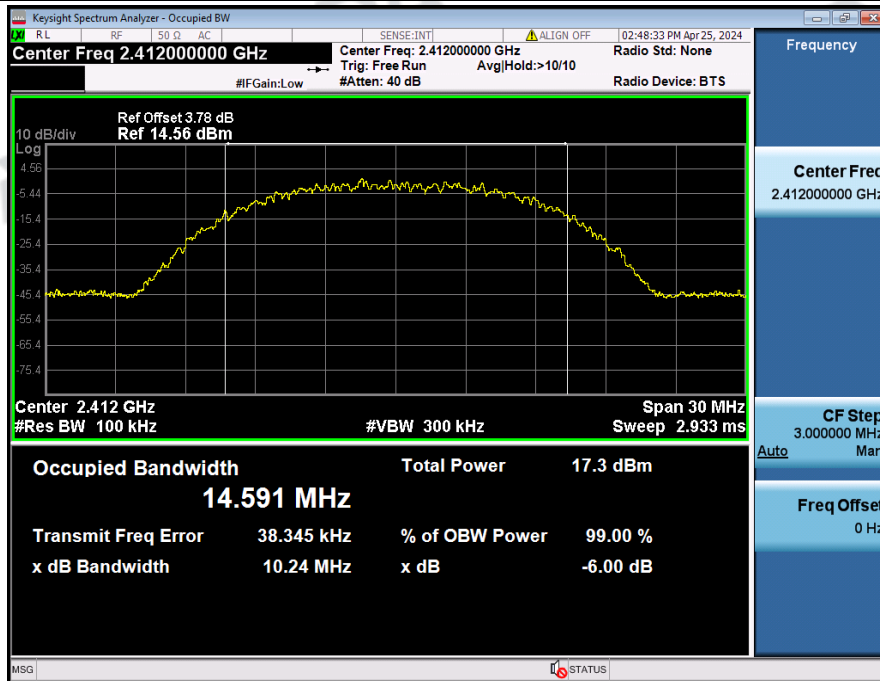


-6dB_Bandwidth_NVNT_ANT1_802_11b_2437

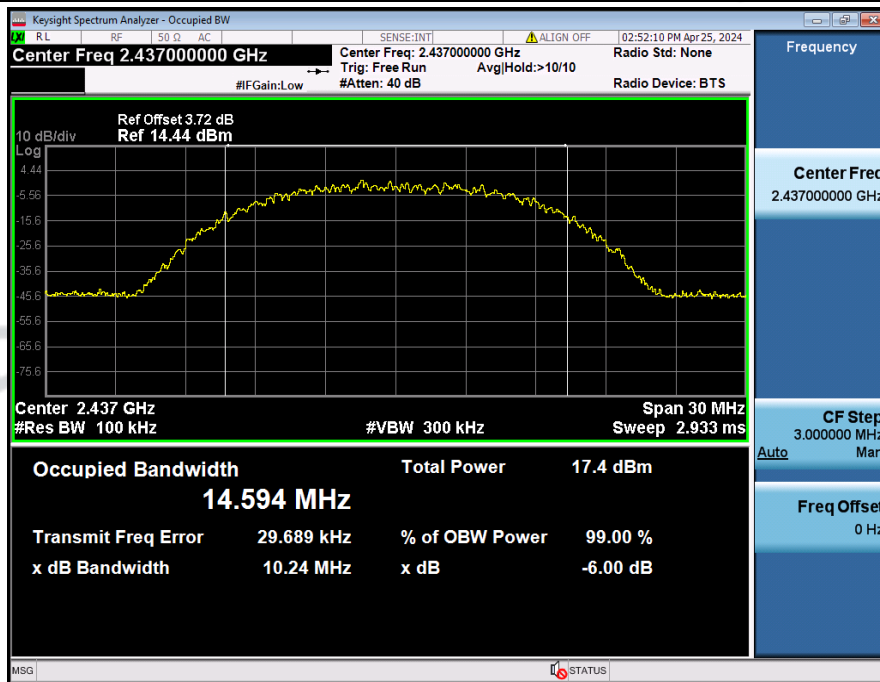


-6dB_Bandwidth_NVNT_ANT1_802_11b_2462

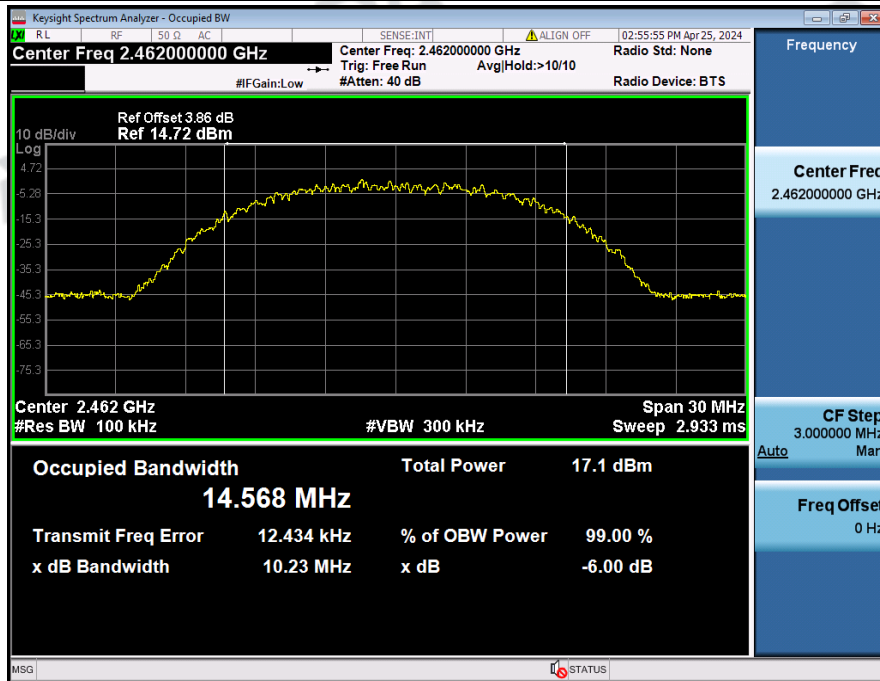


-6dB_Bandwidth_NVNT_ANT1_802_11g_2412

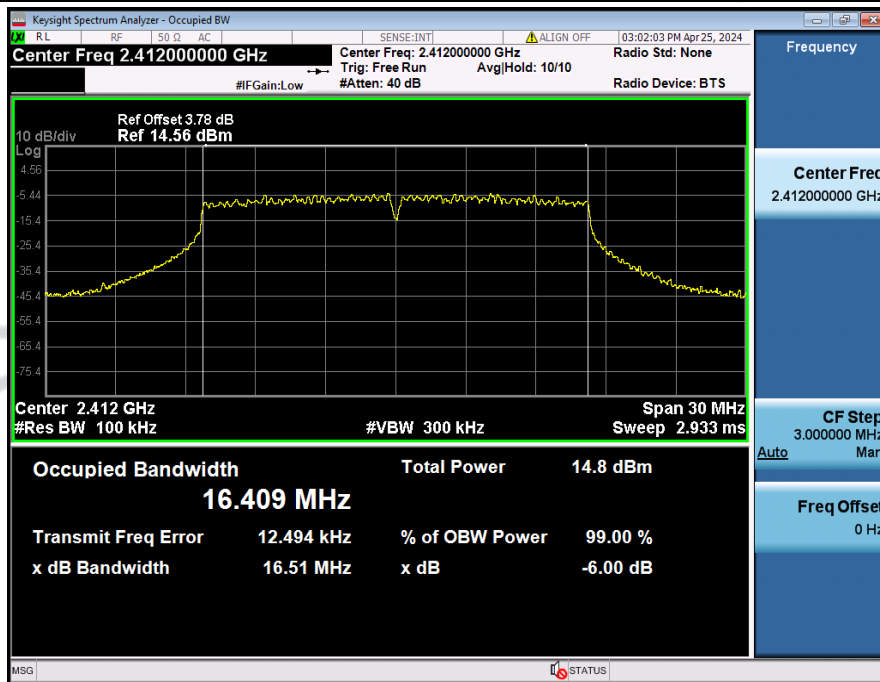


-6dB_Bandwidth_NVNT_ANT1_802_11g_2437

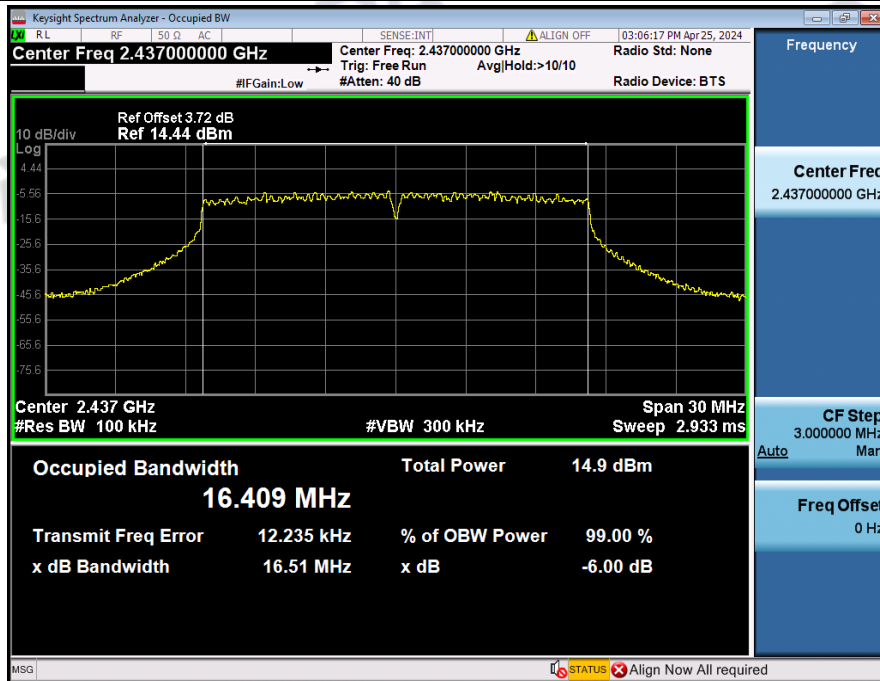


-6dB_Bandwidth_NVNT_ANT1_802_11g_2462

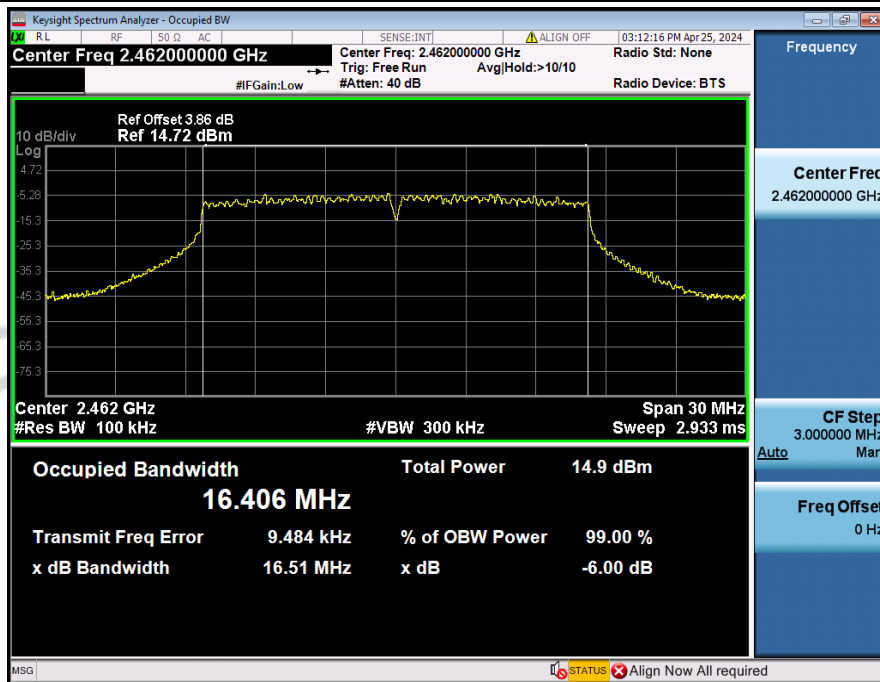


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2412

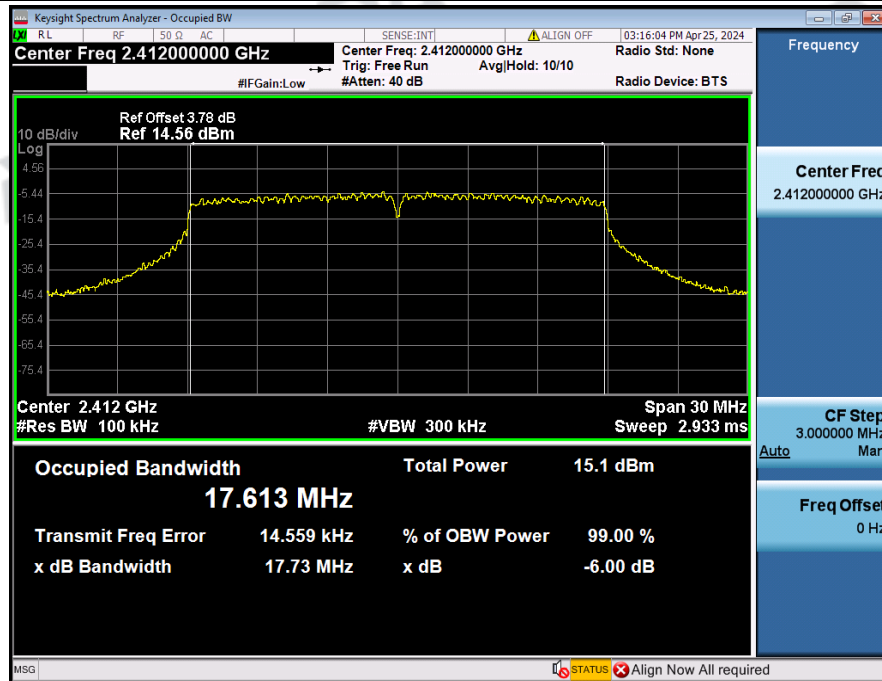


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2437

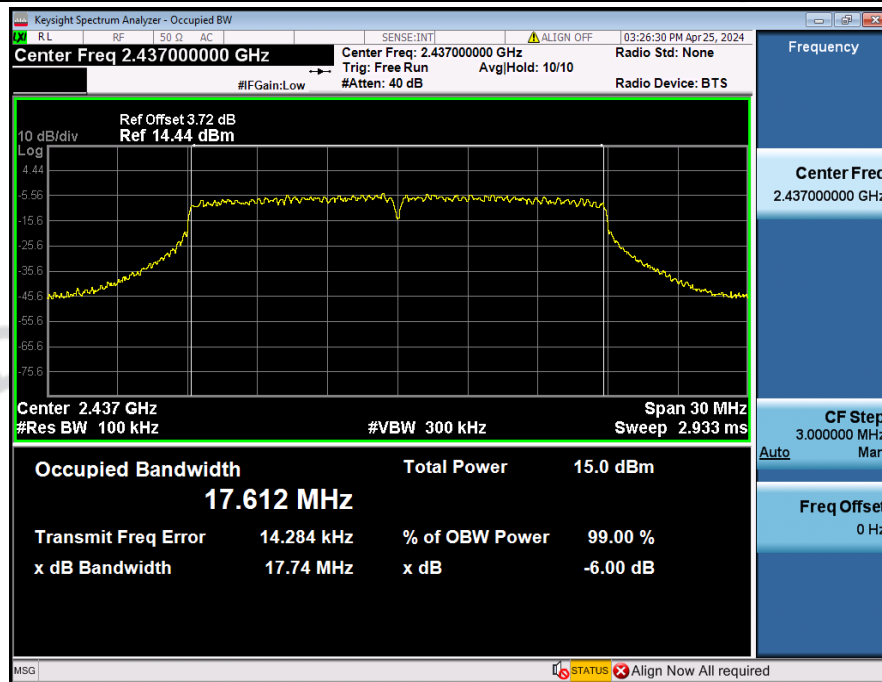


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT20)_2462

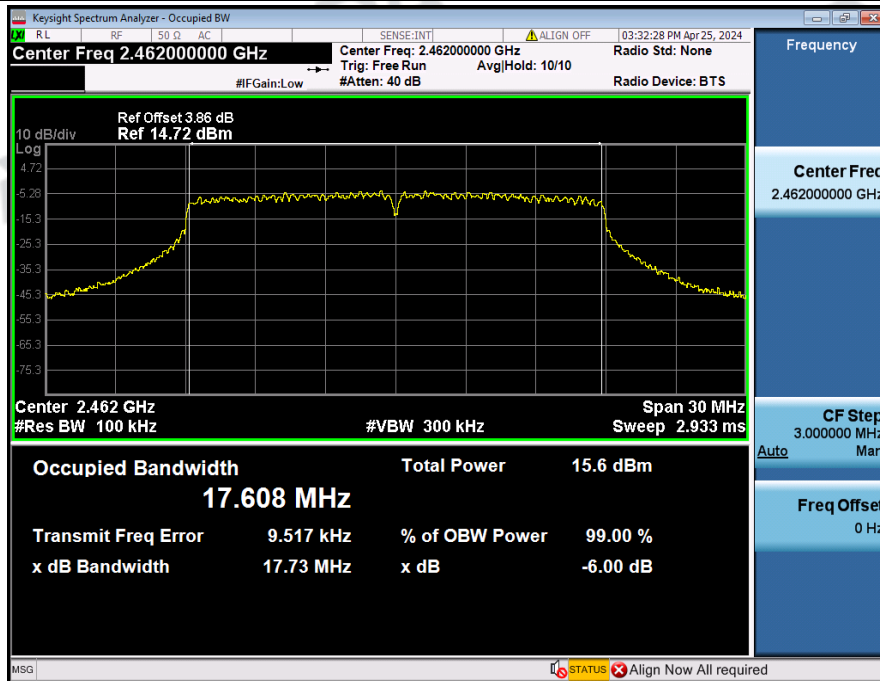


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2422

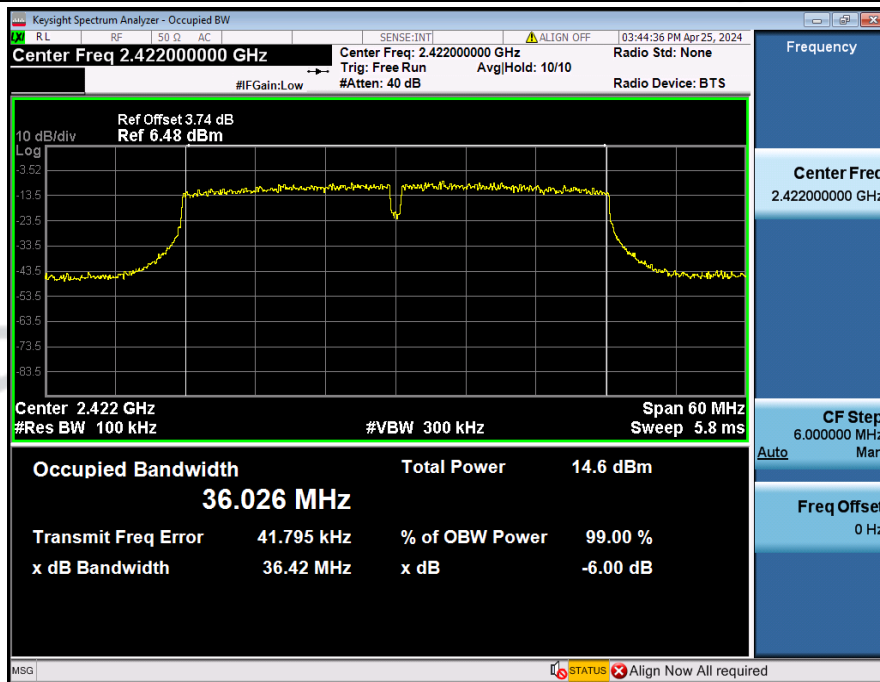


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2437

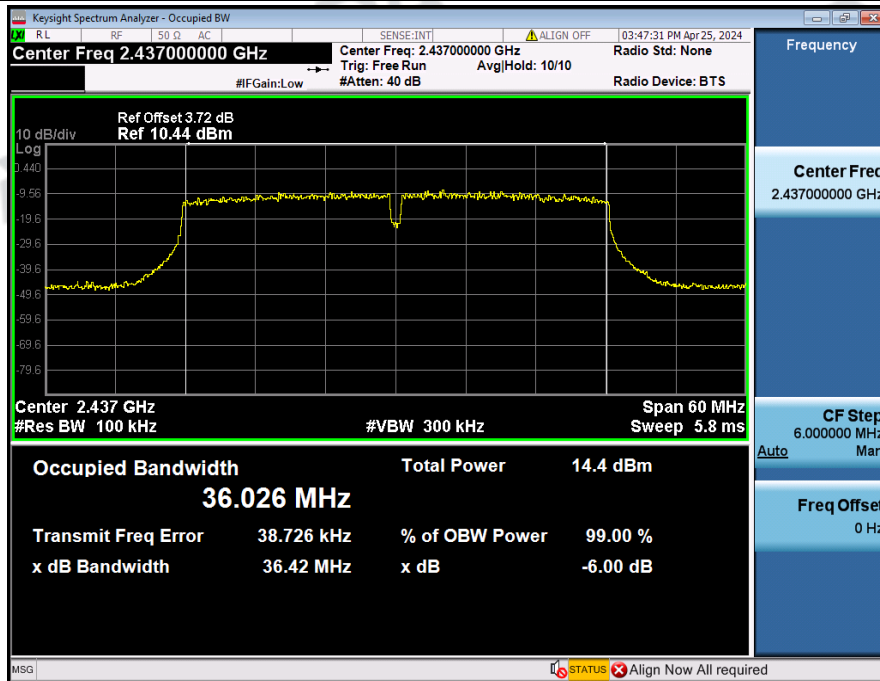


-6dB_Bandwidth_NVNT_ANT1_802_11n(HT40)_2452

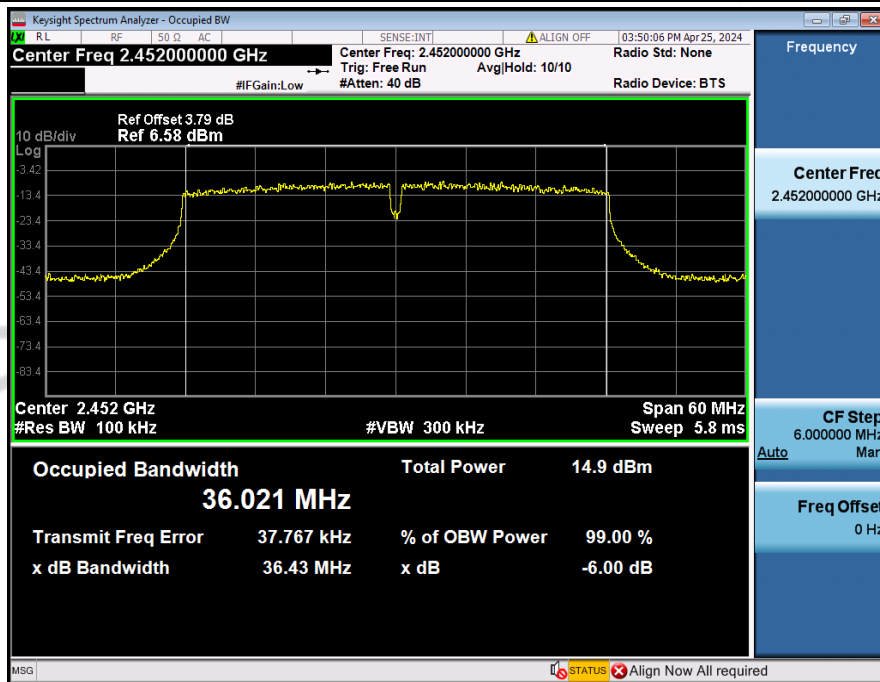


-6dB_Bandwidth_NVNT_ANT2_802_11b_2412

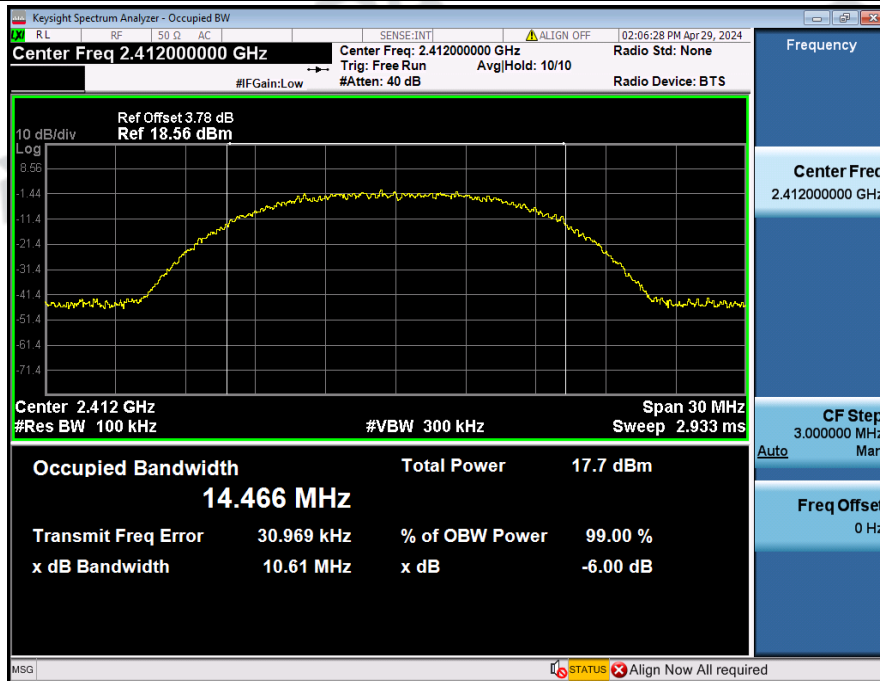


-6dB_Bandwidth_NVNT_ANT2_802_11b_2437

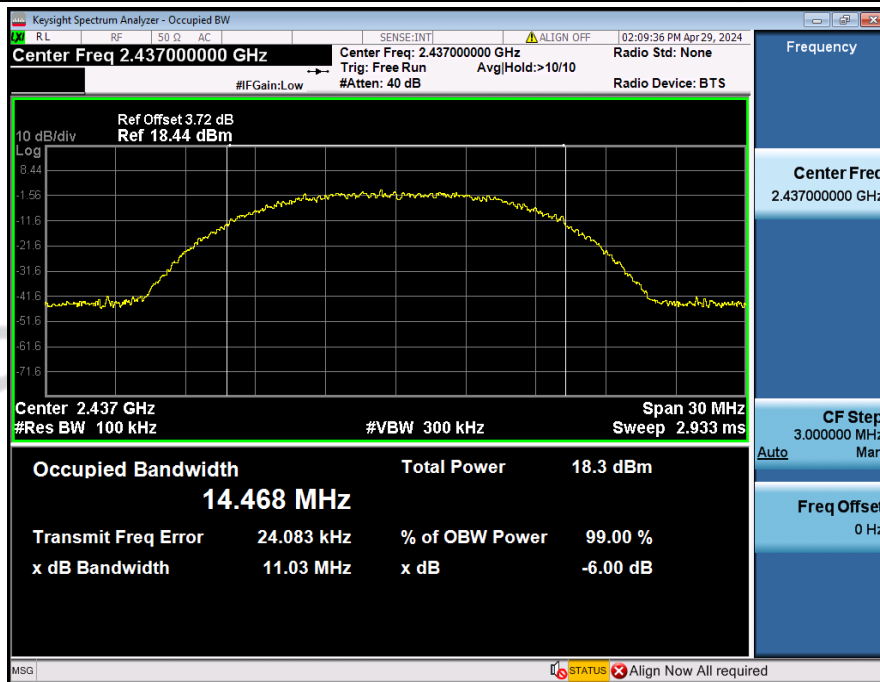


-6dB_Bandwidth_NVNT_ANT2_802_11b_2462

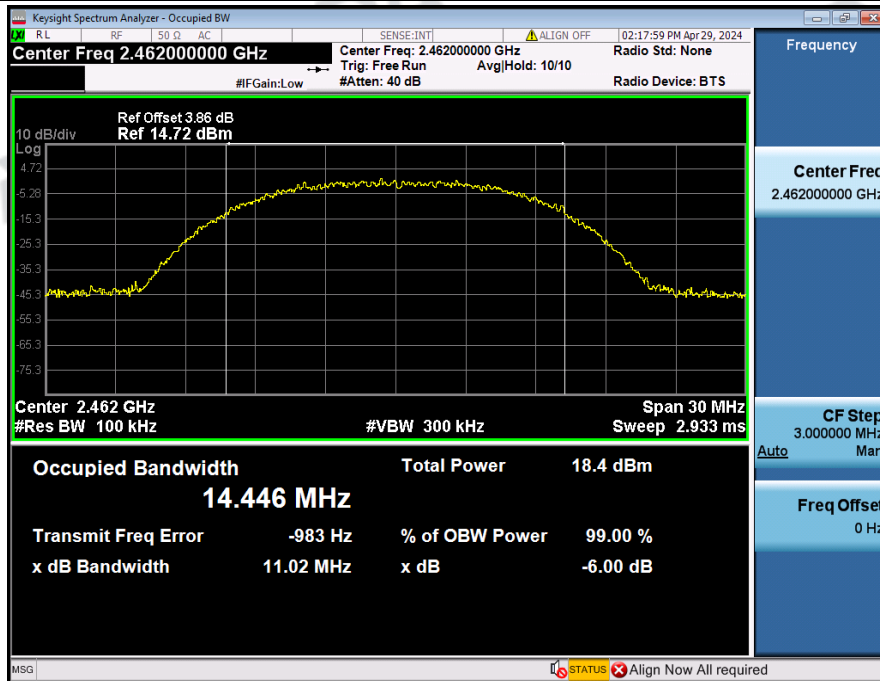


-6dB_Bandwidth_NVNT_ANT2_802_11g_2412

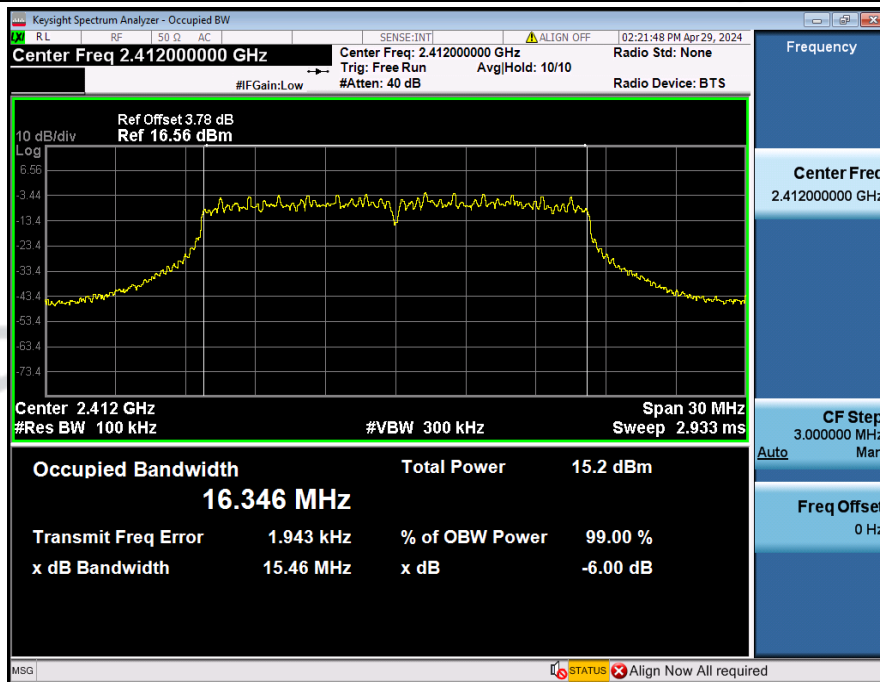


-6dB_Bandwidth_NVNT_ANT2_802_11g_2437

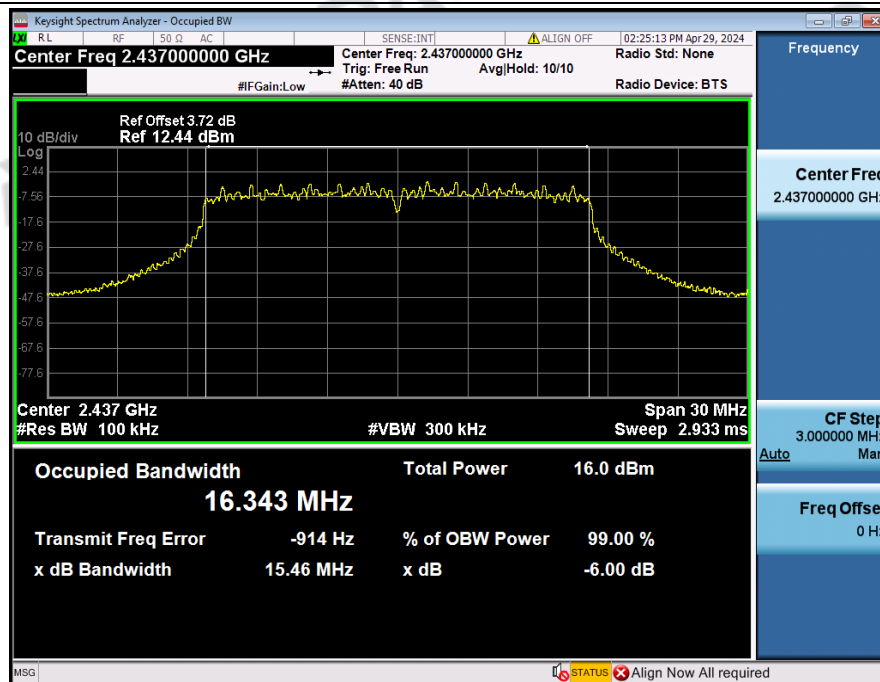


-6dB_Bandwidth_NVNT_ANT2_802_11g_2462

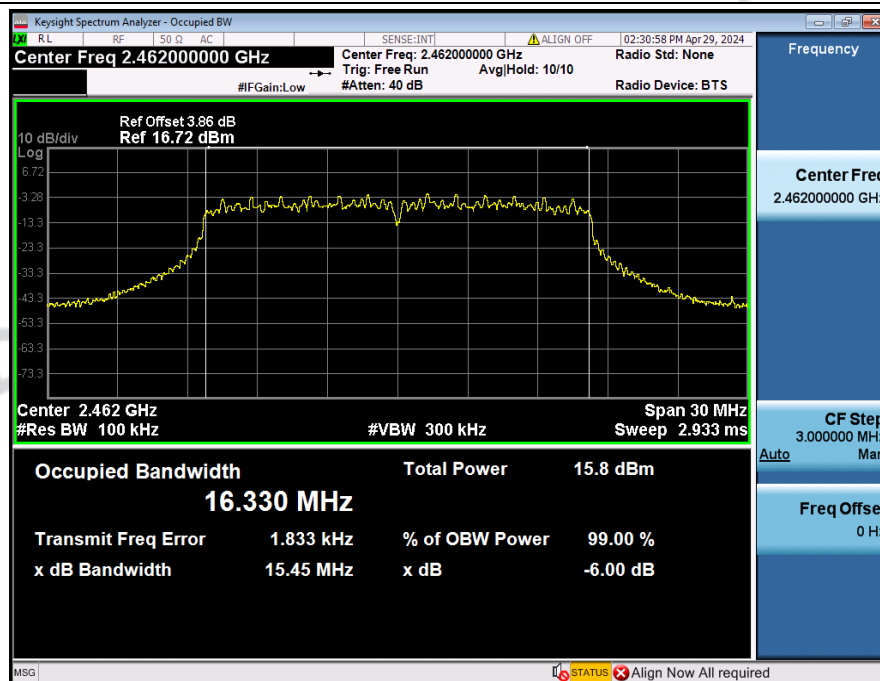


-6dB_Bandwidth_NVNT_ANT2_802_11n(HT20)_2412

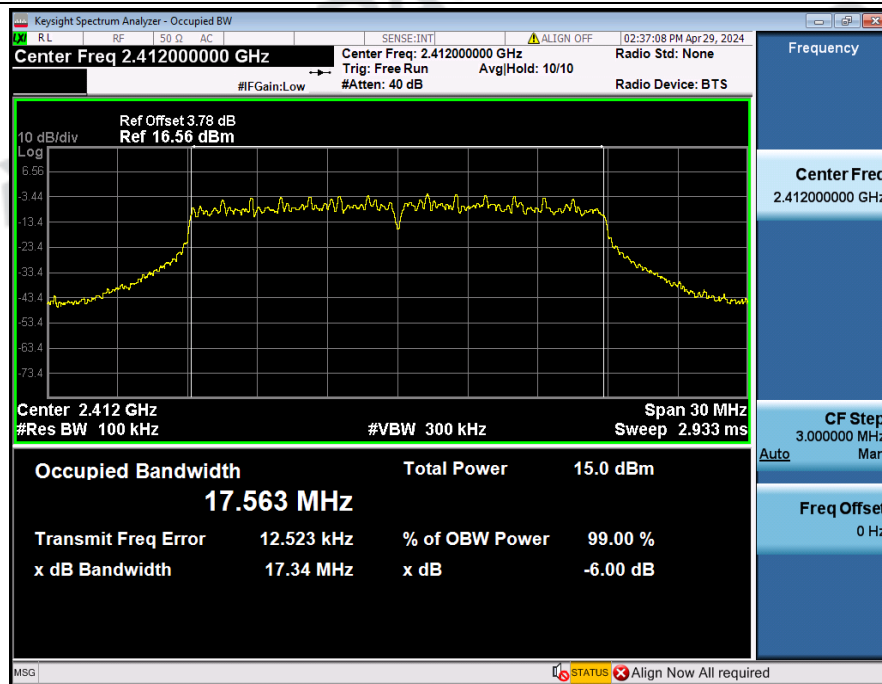


-6dB_Bandwidth_NVNT_ANT2_802_11n(HT20)_2437

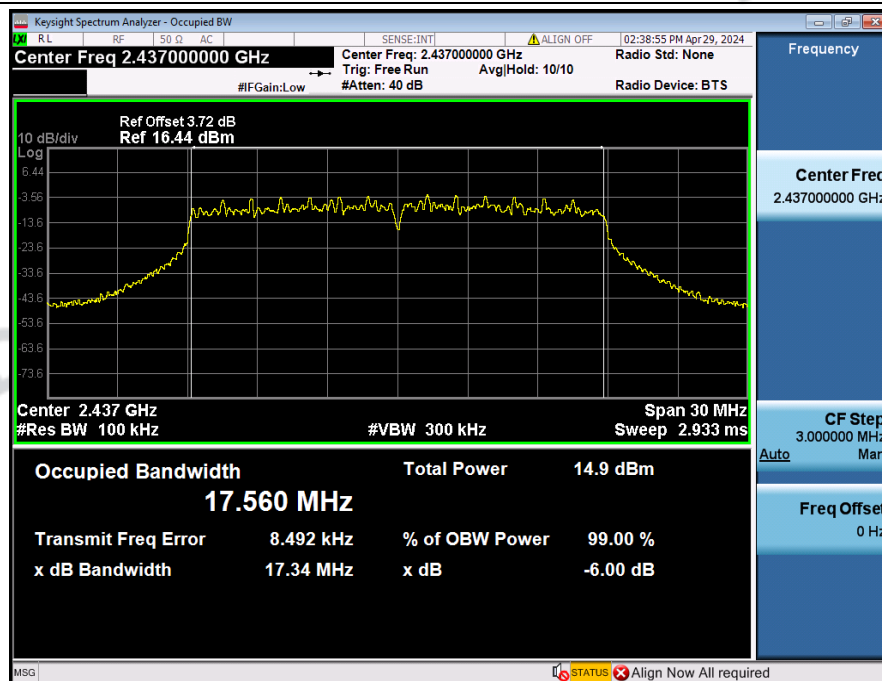


-6dB_Bandwidth_NVNT_ANT2_802_11n(HT20)_2462

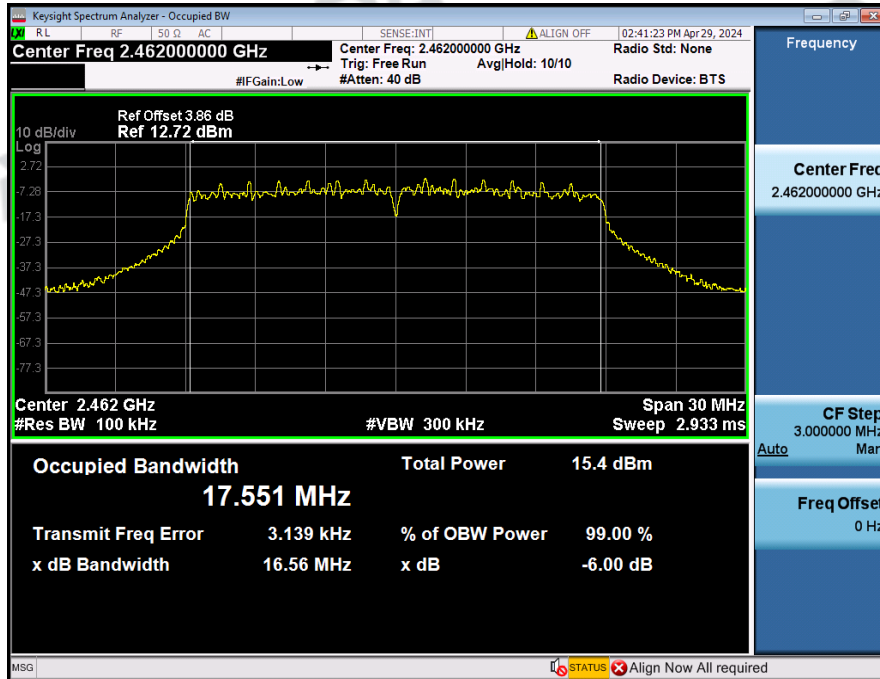


-6dB_Bandwidth_NVNT_ANT2_802_11n(HT40)_2422

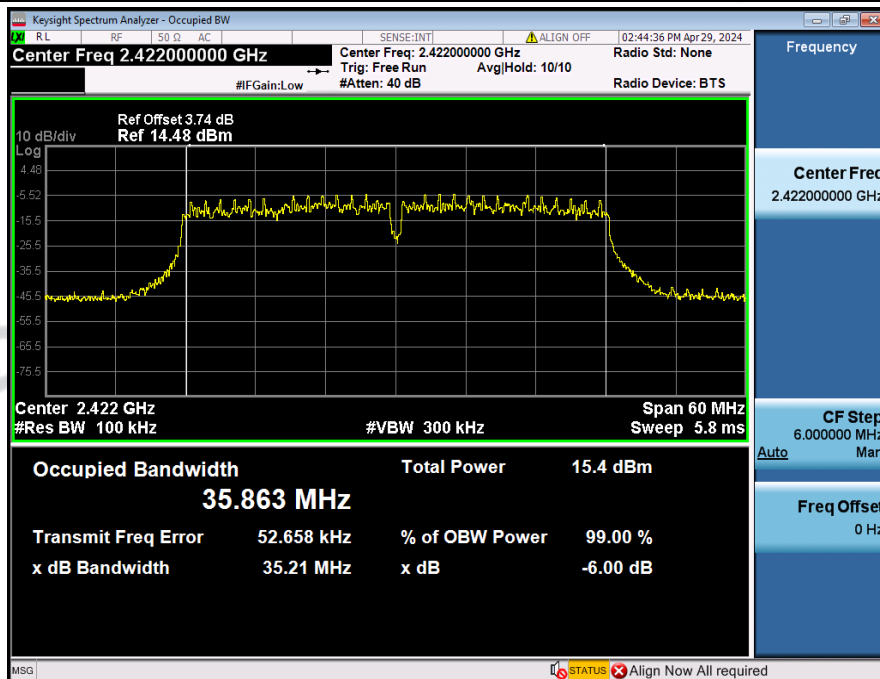

-6dB_Bandwidth_NVNT_ANT2_802_11n(HT40)_2437

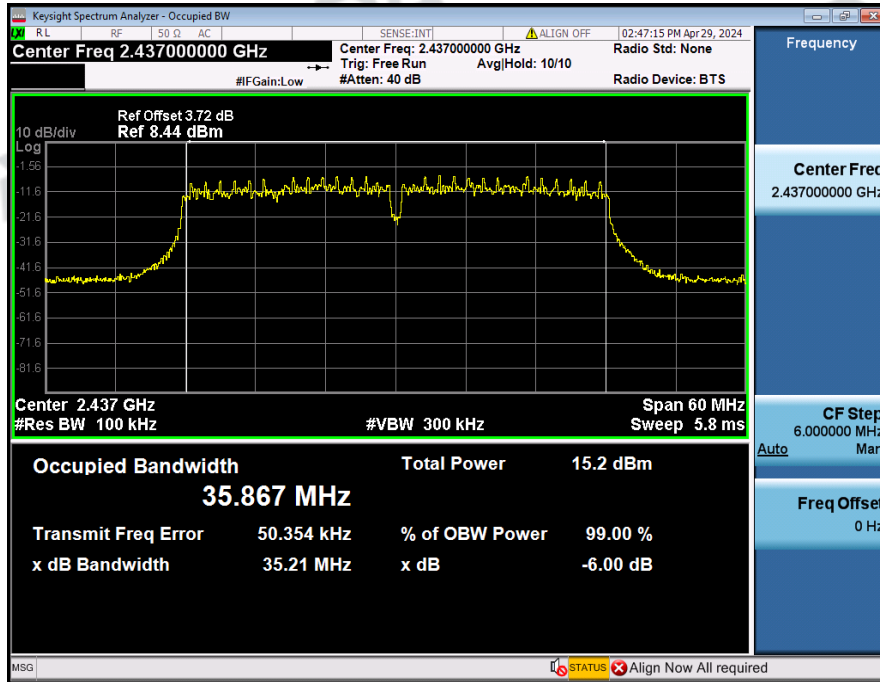


-6dB_Bandwidth_NVNT_ANT2_802_11n(HT40)_2452

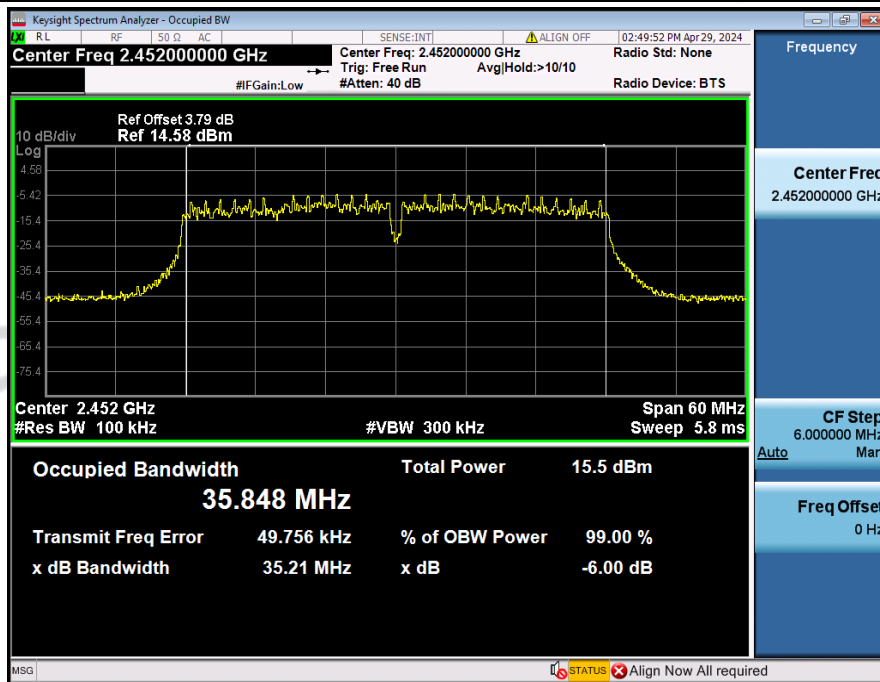

2. 99% Occupied Bandwidth

Condition	Antenna	Modulation	Frequency (MHz)	99% BW (MHz)
NVNT	ANT1	802.11b	2412.00	14.564
NVNT	ANT1	802.11b	2437.00	14.564
NVNT	ANT1	802.11b	2462.00	14.538
NVNT	ANT2	802.11b	2412.00	14.573
NVNT	ANT2	802.11b	2437.00	14.602
NVNT	ANT2	802.11b	2462.00	14.576
NVNT	ANT1	802.11g	2412.00	16.736
NVNT	ANT1	802.11g	2437.00	16.734
NVNT	ANT1	802.11g	2462.00	16.730
NVNT	ANT2	802.11g	2412.00	16.575
NVNT	ANT2	802.11g	2437.00	16.581
NVNT	ANT2	802.11g	2462.00	16.572
NVNT	ANT1	802.11n(HT20)	2412.00	17.962
NVNT	ANT1	802.11n(HT20)	2437.00	17.971
NVNT	ANT1	802.11n(HT20)	2462.00	17.941
NVNT	ANT2	802.11n(HT20)	2412.00	18.128
NVNT	ANT2	802.11n(HT20)	2437.00	18.104
NVNT	ANT2	802.11n(HT20)	2462.00	18.089
NVNT	ANT1	802.11n(HT40)	2422.00	36.361
NVNT	ANT1	802.11n(HT40)	2437.00	36.381
NVNT	ANT1	802.11n(HT40)	2452.00	36.354
NVNT	ANT2	802.11n(HT40)	2422.00	36.458
NVNT	ANT2	802.11n(HT40)	2437.00	36.547
NVNT	ANT2	802.11n(HT40)	2452.00	36.434


99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2412

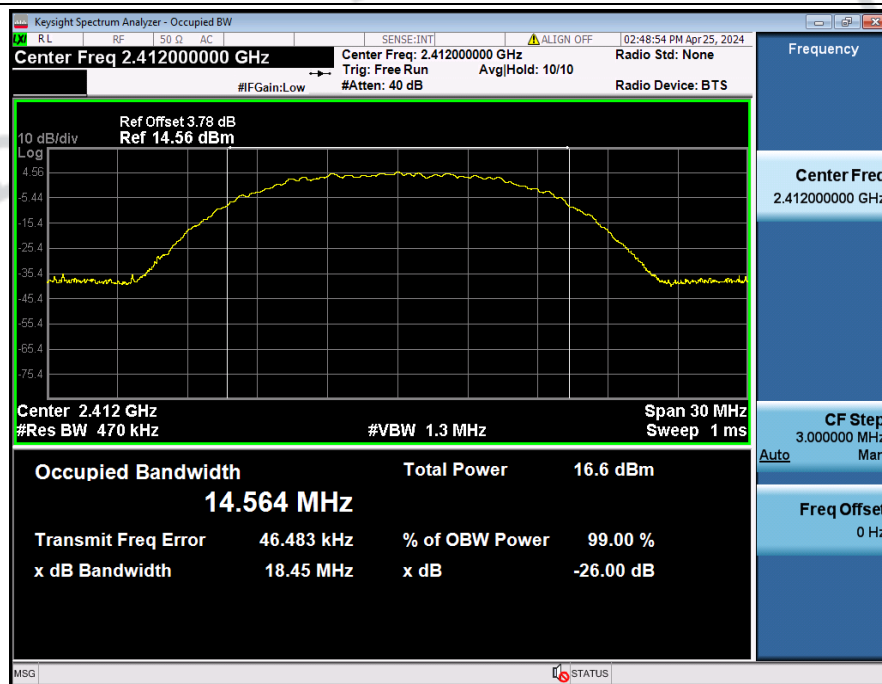


99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2437




99%_Occupied_Bandwidth_NVNT_ANT1_802_11b_2462

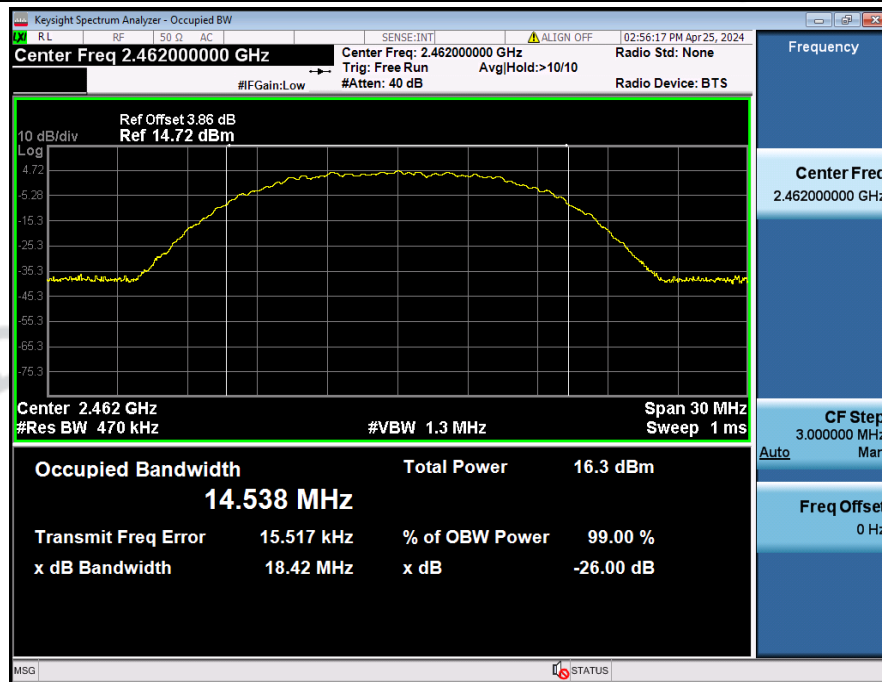


99%_Occupied_Bandwidth_NVNT_ANT1_802_11g_2412

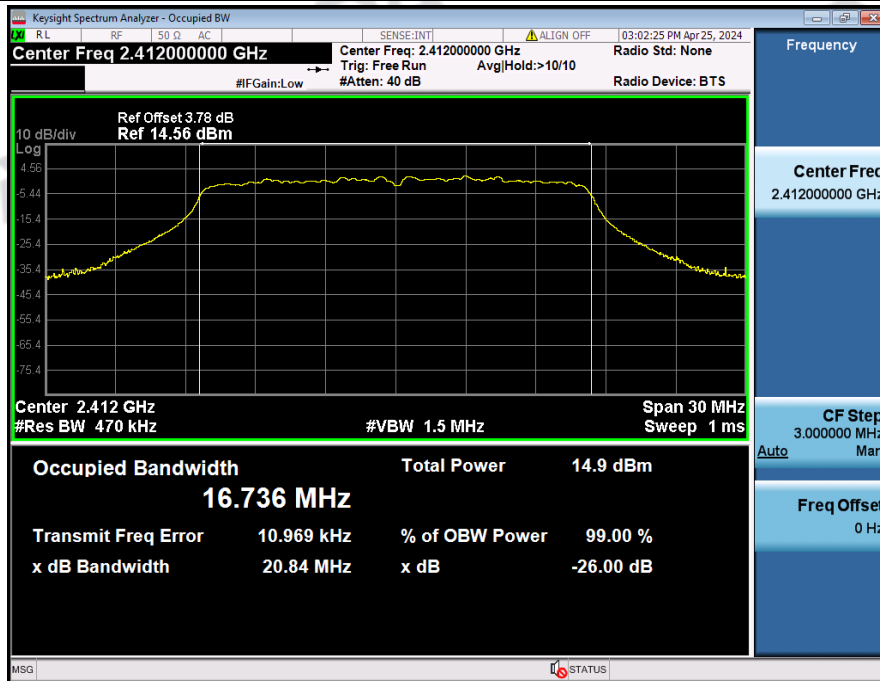


99%_Occupied_Bandwidth_NVNT_ANT1_802_11g_2437

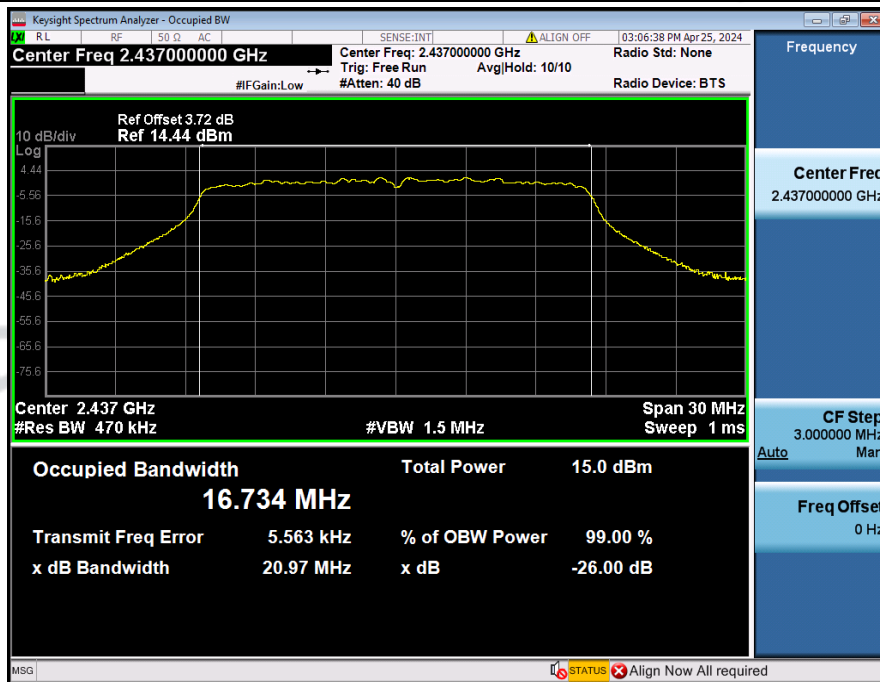


99%_Occupied_Bandwidth_NVNT_ANT1_802_11g_2462

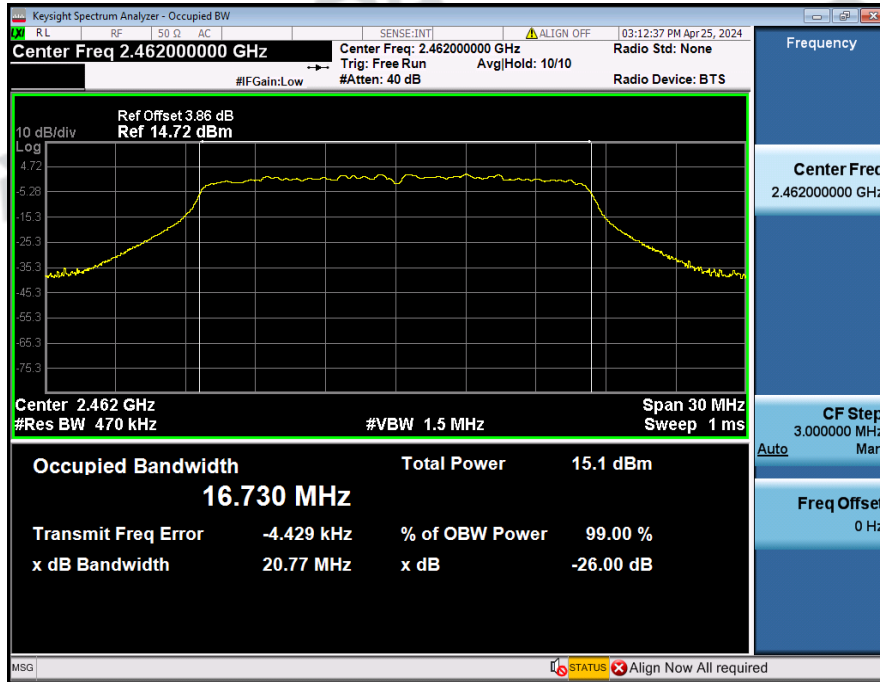


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2412

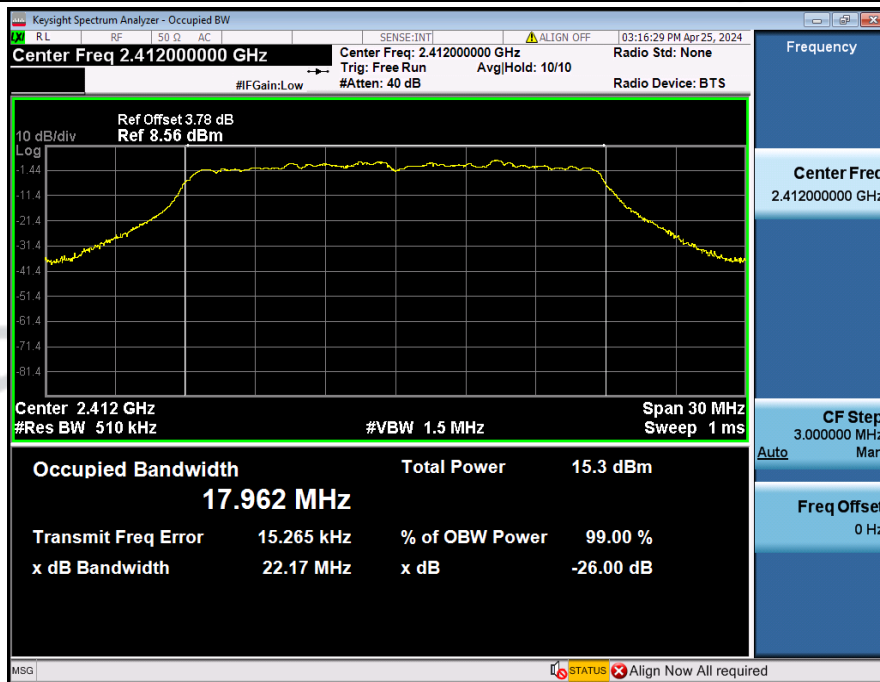


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2437

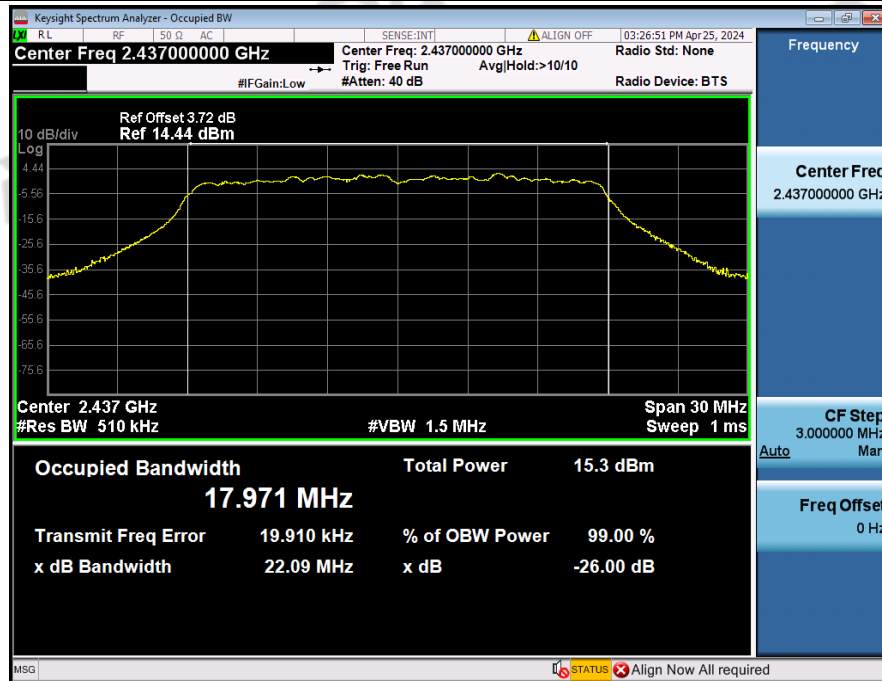


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT20)_2462

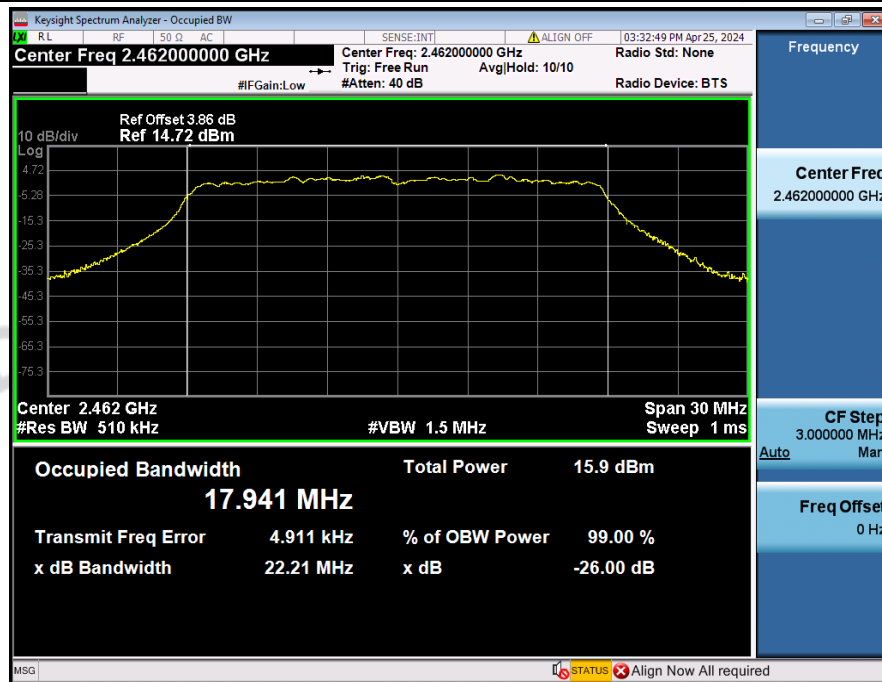


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT40)_2422

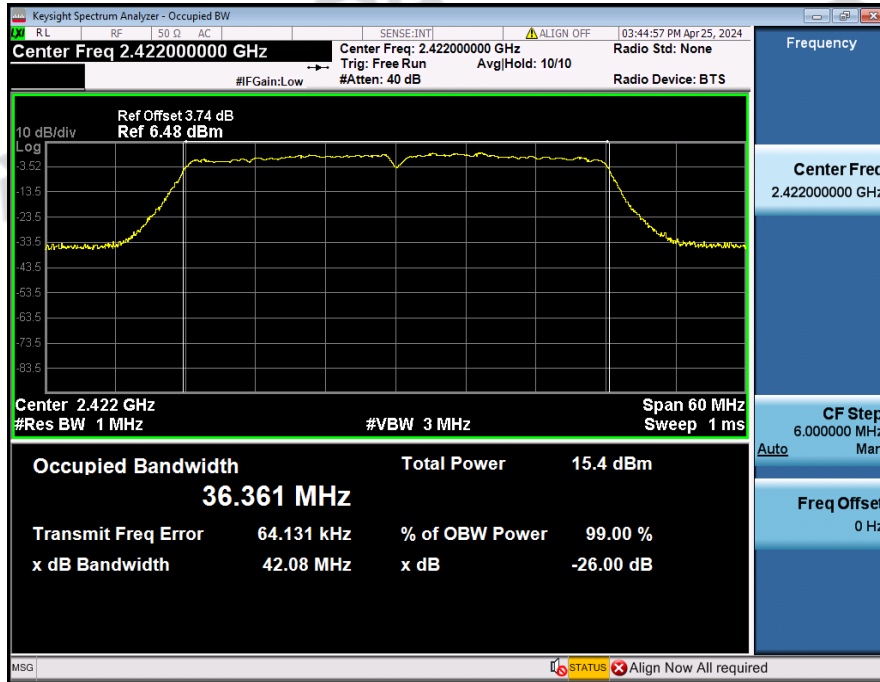


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT40)_2437

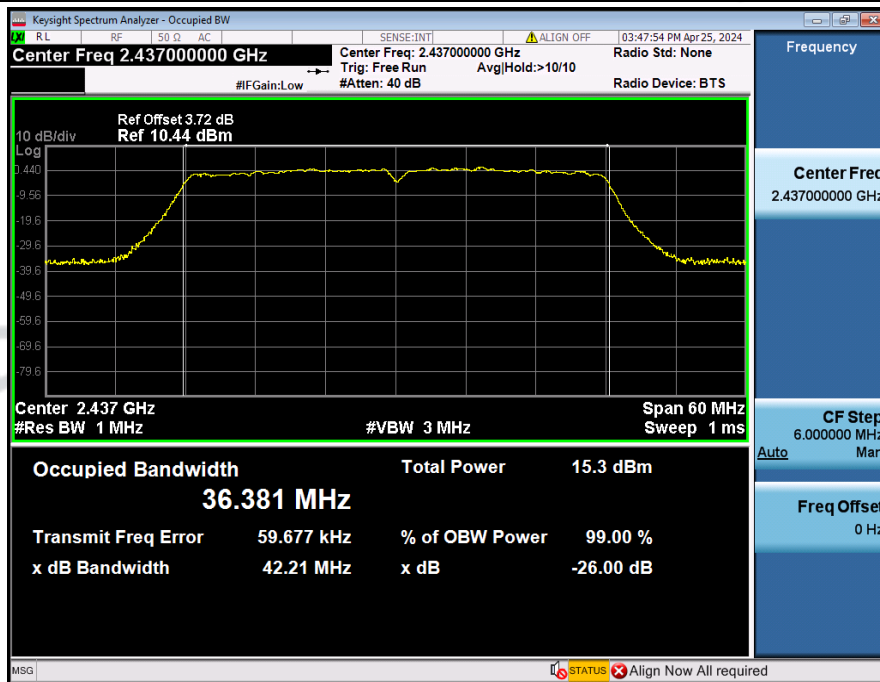


99%_Occupied_Bandwidth_NVNT_ANT1_802_11n(HT40)_2452

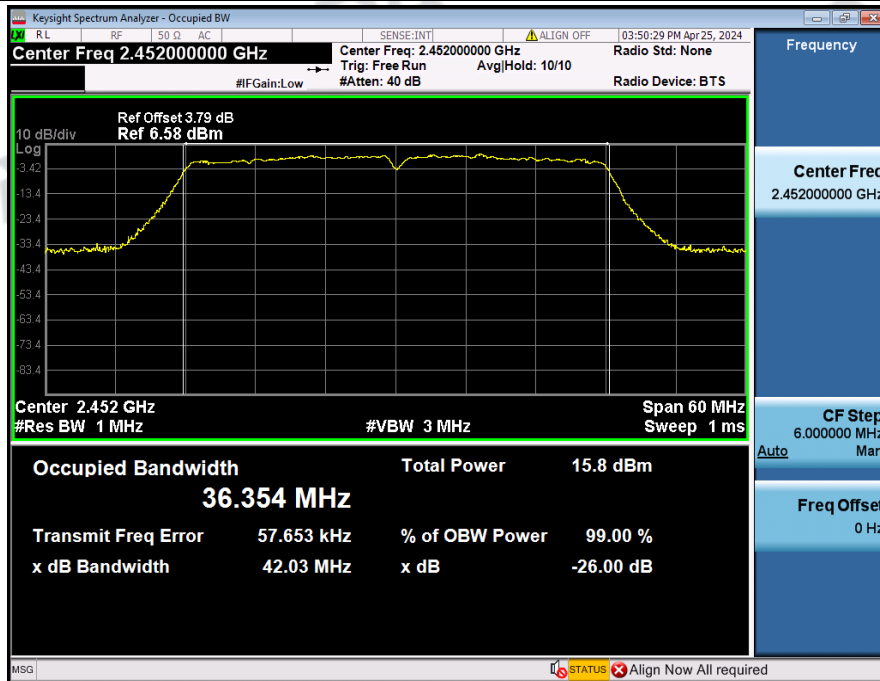


99%_Occupied_Bandwidth_NVNT_ANT2_802_11b_2412

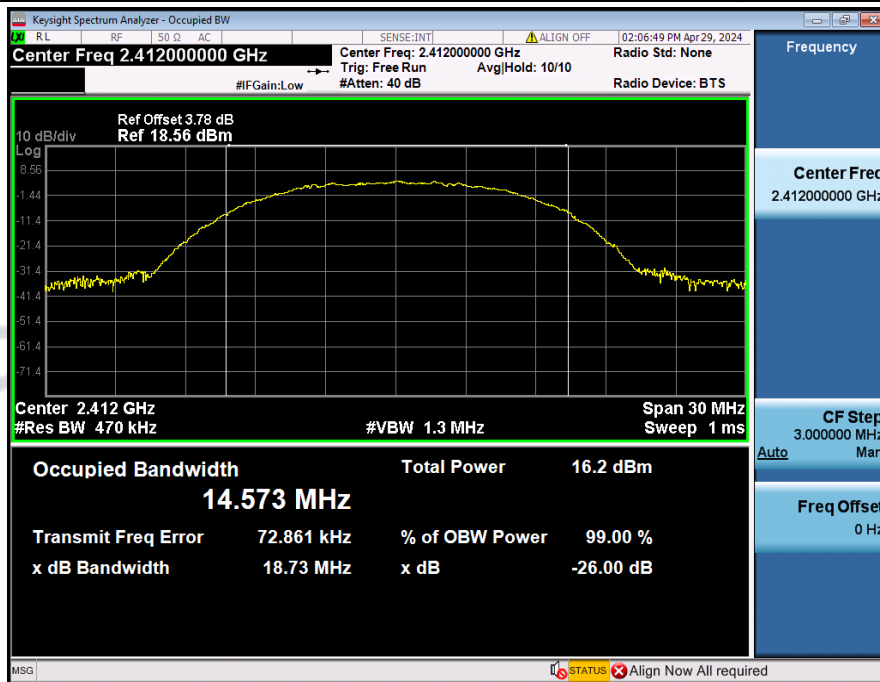


99%_Occupied_Bandwidth_NVNT_ANT2_802_11b_2437

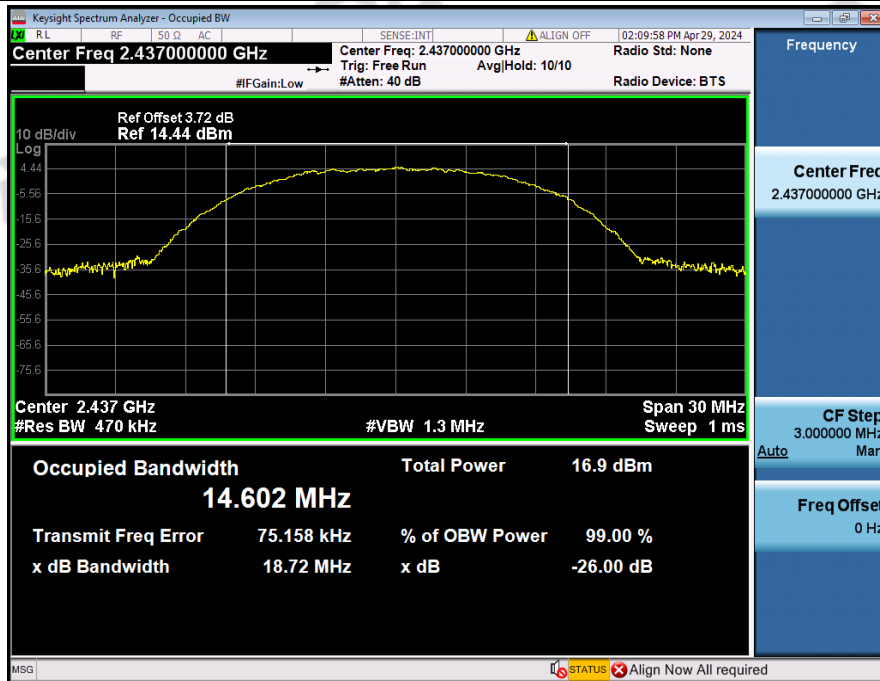


99%_Occupied_Bandwidth_NVNT_ANT2_802_11b_2462

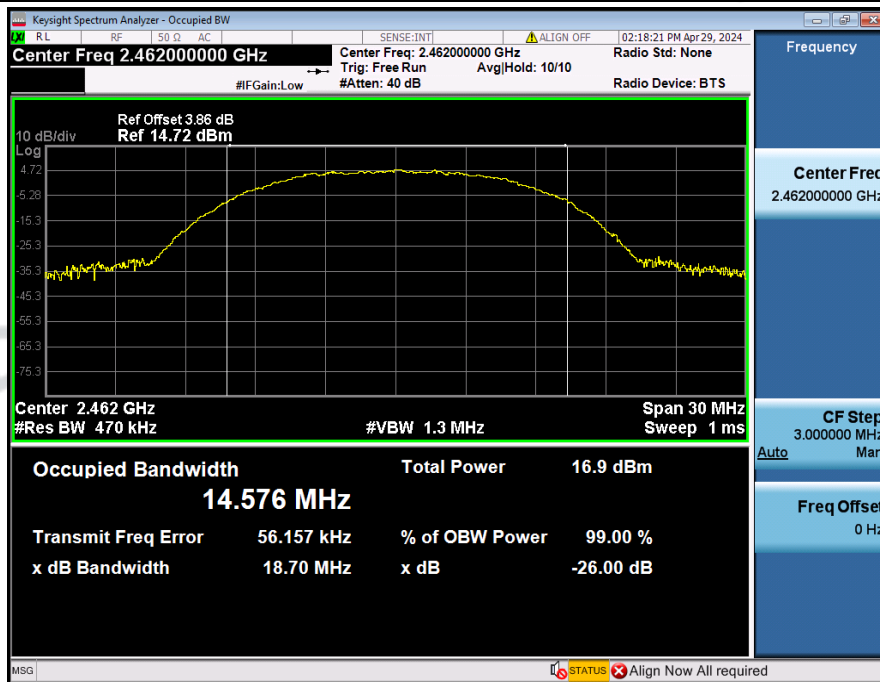


99%_Occupied_Bandwidth_NVNT_ANT2_802_11g_2412

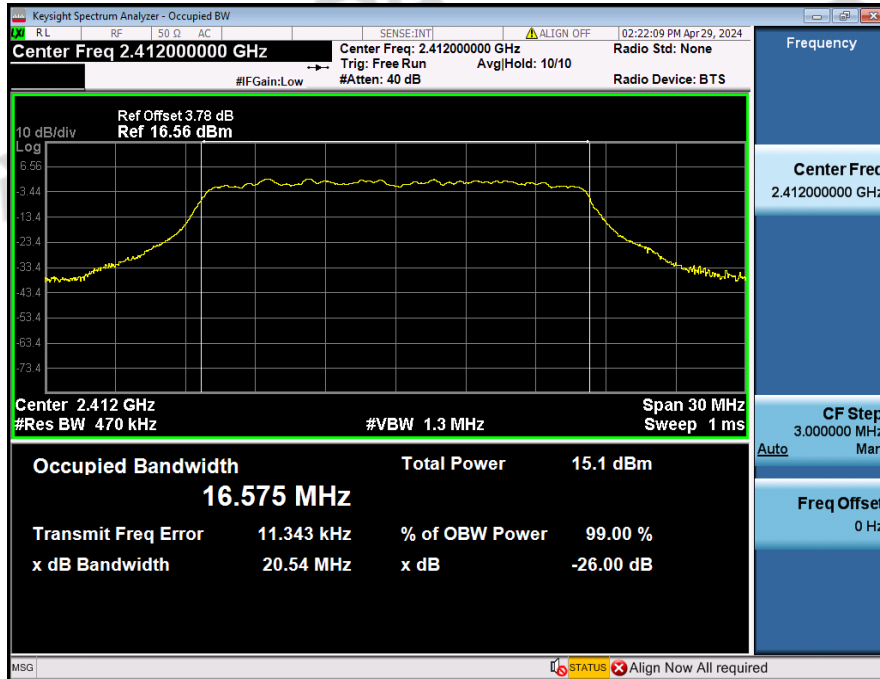


99%_Occupied_Bandwidth_NVNT_ANT2_802_11g_2437

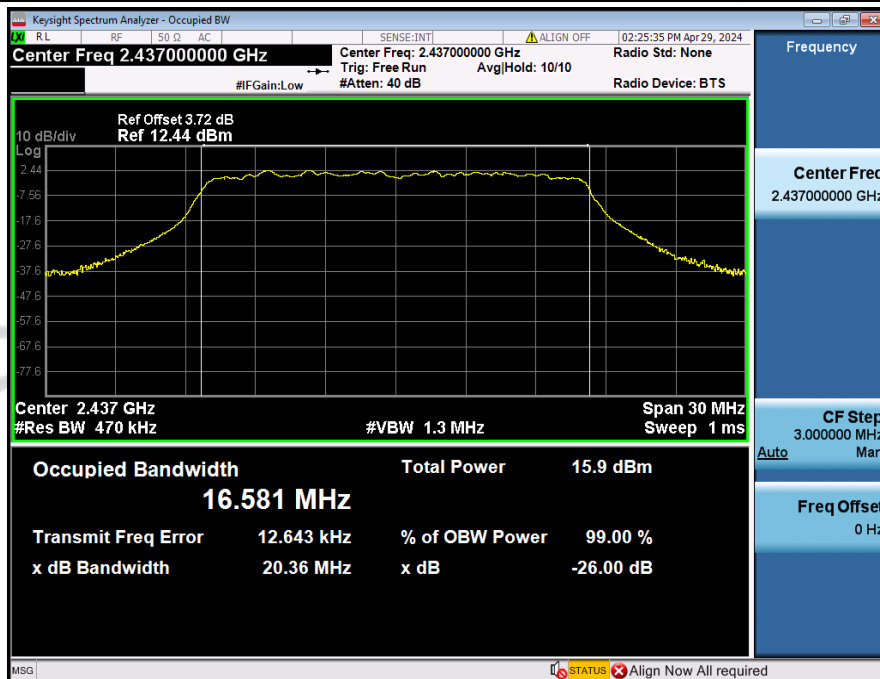


99%_Occupied_Bandwidth_NVNT_ANT2_802_11g_2462

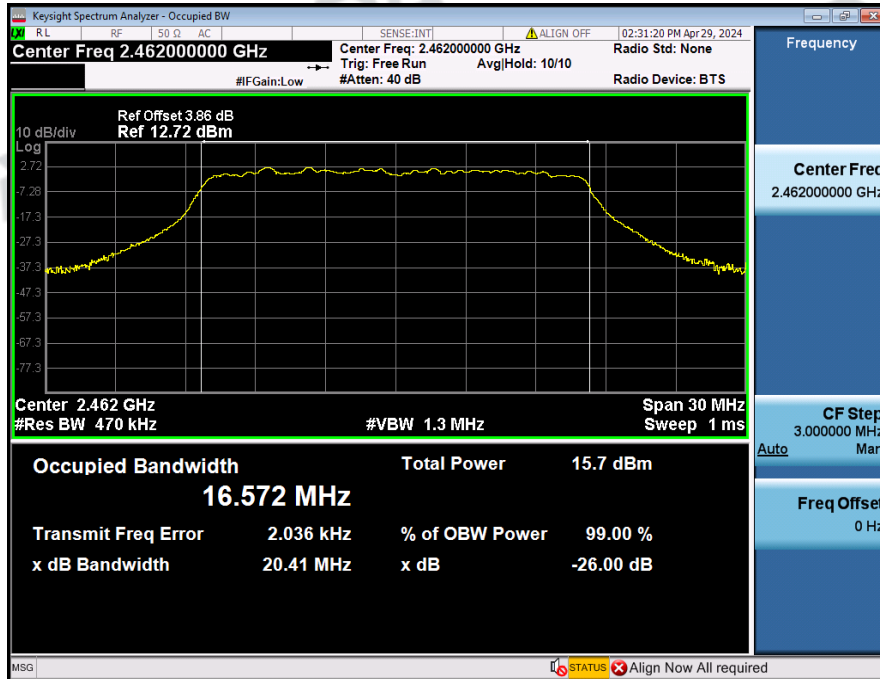

99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT20)_2412

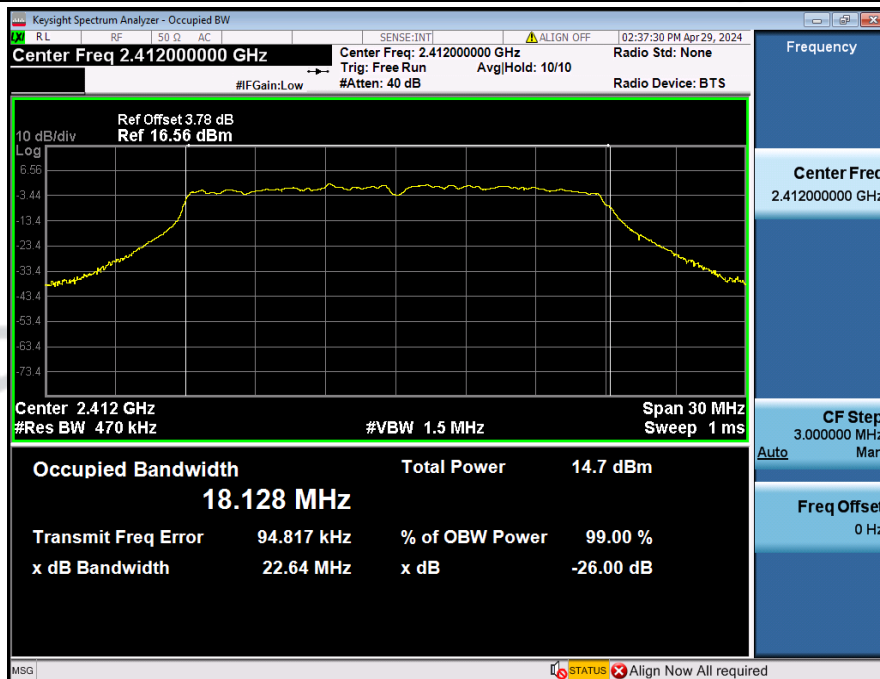

99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT20)_2437

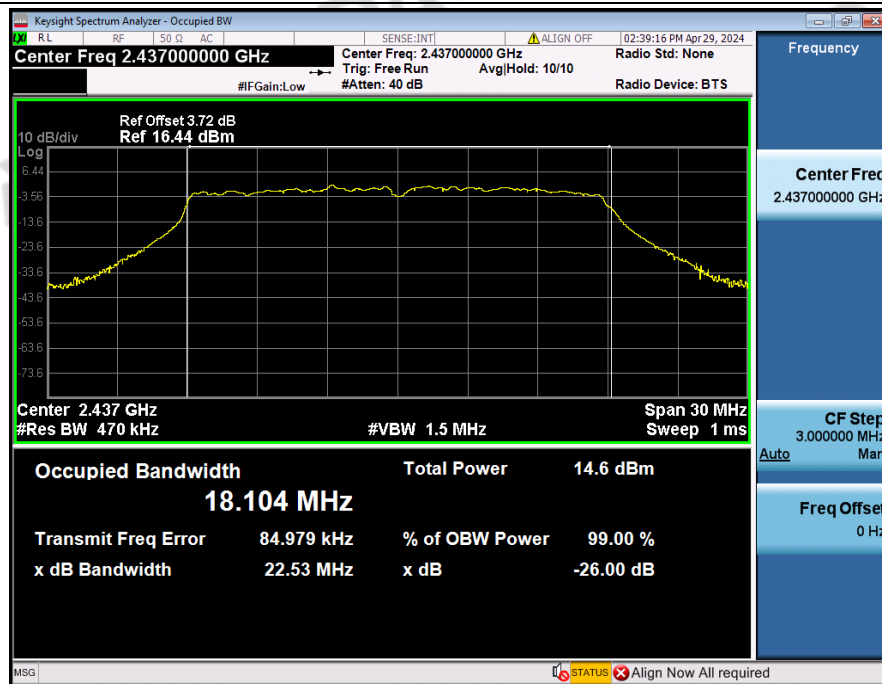


99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT20)_2462




99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT40)_2422



99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT40)_2437

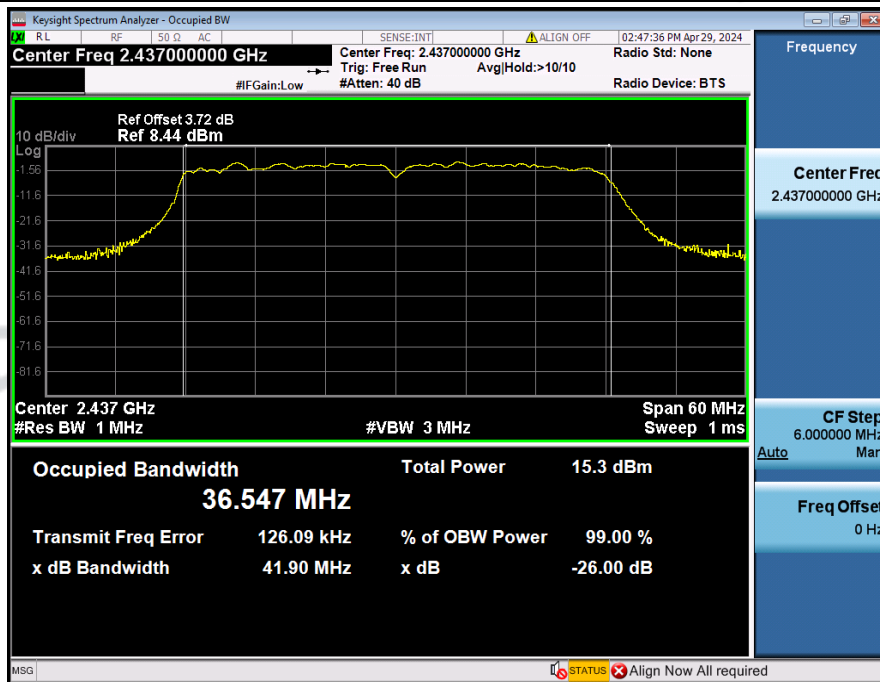


99%_Occupied_Bandwidth_NVNT_ANT2_802_11n(HT40)_2452

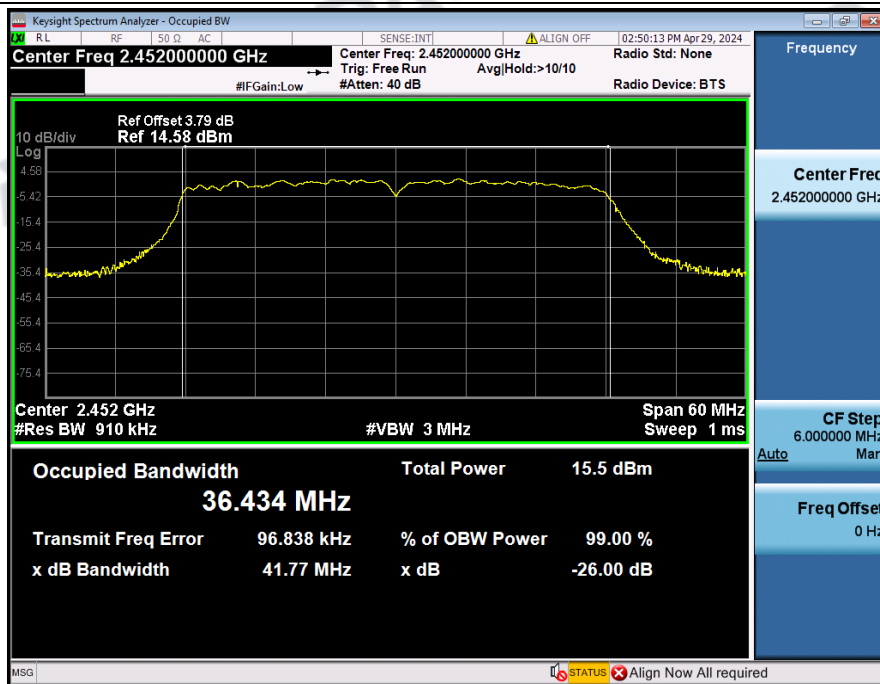


3. MAX. Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Detector	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11b	2412.00	Peak	16.05	30	Pass
NVNT	ANT1	802.11b	2437.00	Peak	16.12	30	Pass
NVNT	ANT1	802.11b	2462.00	Peak	16.21	30	Pass
NVNT	ANT2	802.11b	2412.00	Peak	16.00	30	Pass
NVNT	ANT2	802.11b	2437.00	Peak	16.26	30	Pass
NVNT	ANT2	802.11b	2462.00	Peak	16.28	30	Pass
NVNT	ANT1	802.11g	2412.00	Peak	16.07	30	Pass
NVNT	ANT1	802.11g	2437.00	Peak	15.96	30	Pass
NVNT	ANT1	802.11g	2462.00	Peak	16.01	30	Pass
NVNT	ANT2	802.11g	2412.00	Peak	16.58	30	Pass
NVNT	ANT2	802.11g	2437.00	Peak	16.48	30	Pass
NVNT	ANT2	802.11g	2462.00	Peak	16.26	30	Pass
NVNT	ANT1	802.11n(HT20)	2412.00	Peak	15.62	30	Pass
NVNT	ANT1	802.11n(HT20)	2437.00	Peak	15.48	30	Pass
NVNT	ANT1	802.11n(HT20)	2462.00	Peak	15.90	30	Pass
NVNT	ANT2	802.11n(HT20)	2412.00	Peak	15.40	30	Pass
NVNT	ANT2	802.11n(HT20)	2437.00	Peak	15.23	30	Pass
NVNT	ANT2	802.11n(HT20)	2462.00	Peak	15.79	30	Pass
NVNT	ANT1	802.11n(HT40)	2422.00	Peak	15.17	30	Pass
NVNT	ANT1	802.11n(HT40)	2437.00	Peak	15.00	30	Pass
NVNT	ANT1	802.11n(HT40)	2452.00	Peak	15.28	30	Pass
NVNT	ANT2	802.11n(HT40)	2422.00	Peak	15.32	30	Pass
NVNT	ANT2	802.11n(HT40)	2437.00	Peak	15.08	30	Pass
NVNT	ANT2	802.11n(HT40)	2452.00	Peak	15.38	30	Pass


MAX _Output_Power_NVNT_ANT1_802_11b_2412

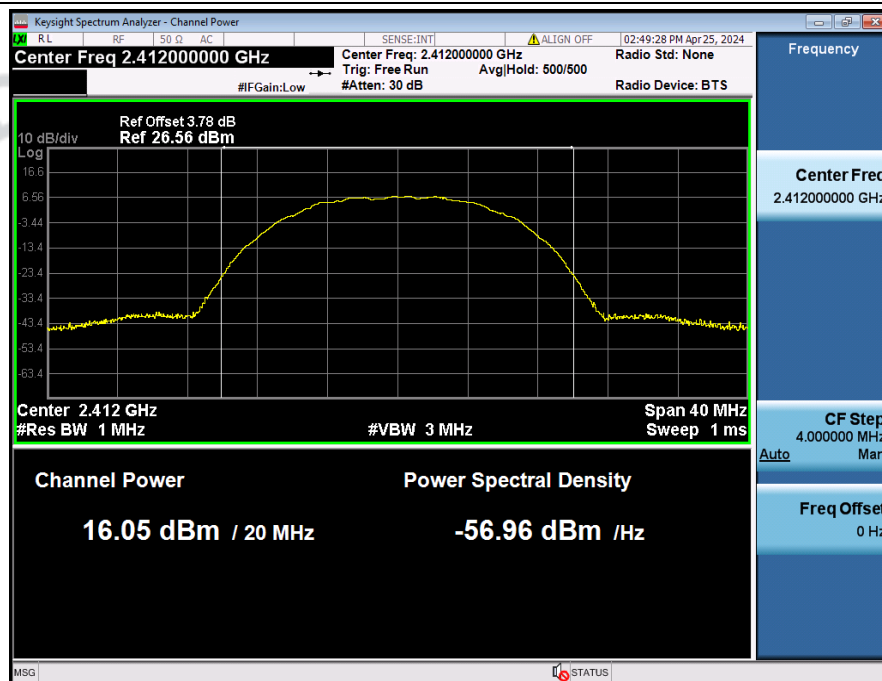


MAX__Output_Power_NVNT_ANT1_802_11b_2437

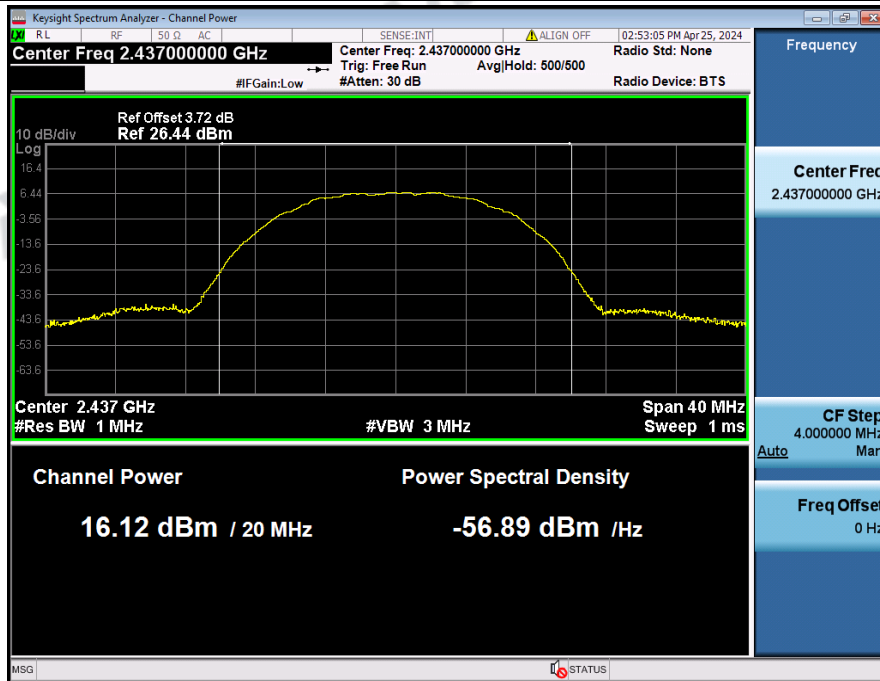


MAX__Output_Power_NVNT_ANT1_802_11b_2462

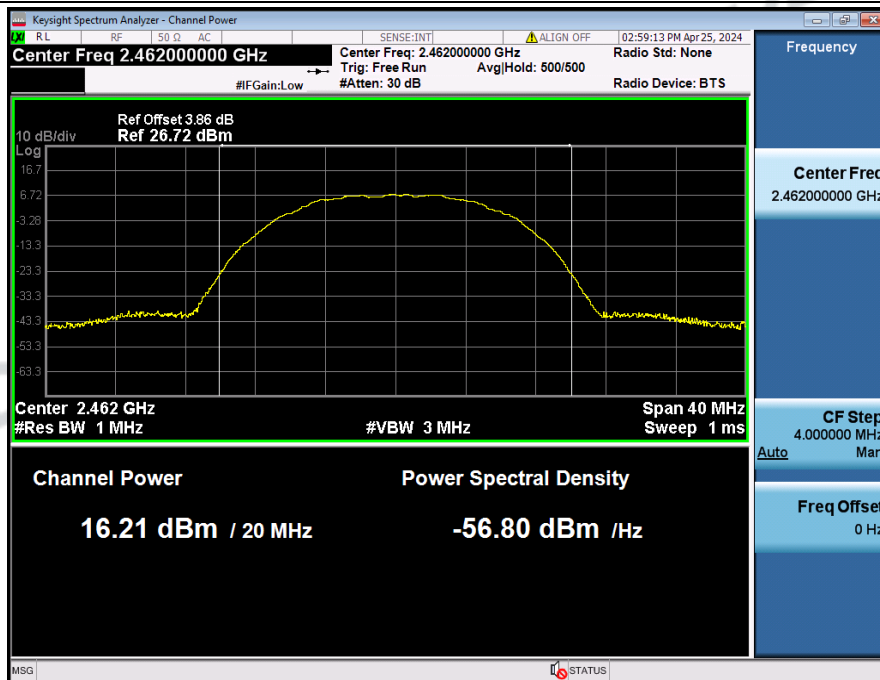


MAX _Output_Power_NVNT_ANT1_802_11g_2412

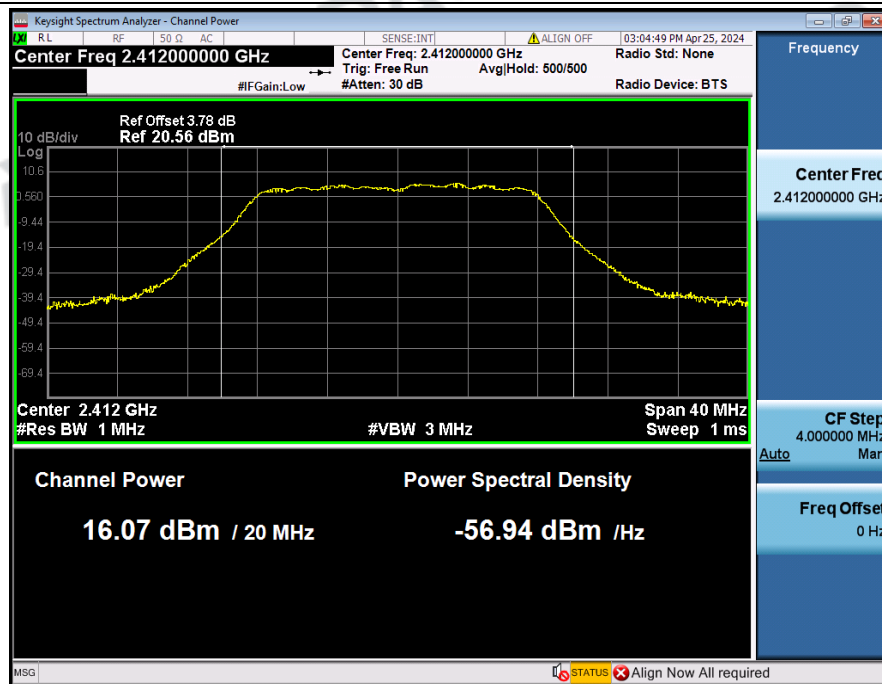


MAX _Output_Power_NVNT_ANT1_802_11g_2437

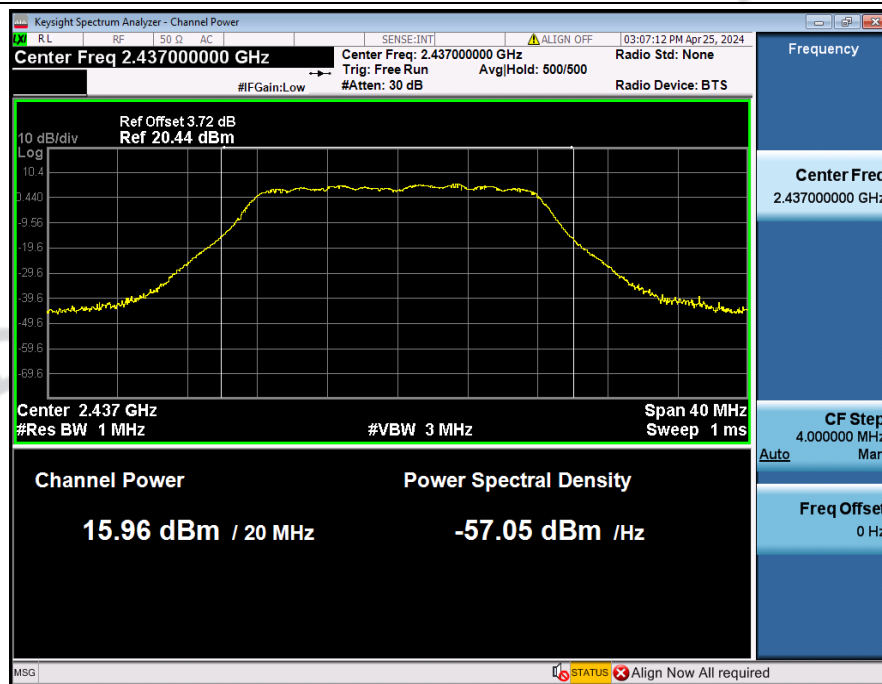


MAX_Output_Power_NVNT_ANT1_802_11g_2462

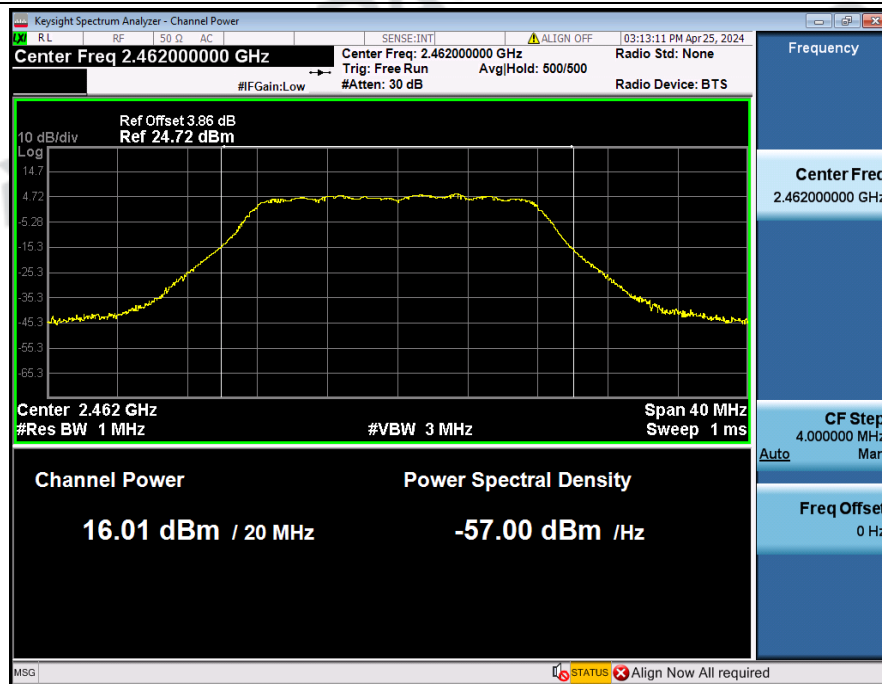


MAX_Output_Power_NVNT_ANT1_802_11n(HT20)_2412

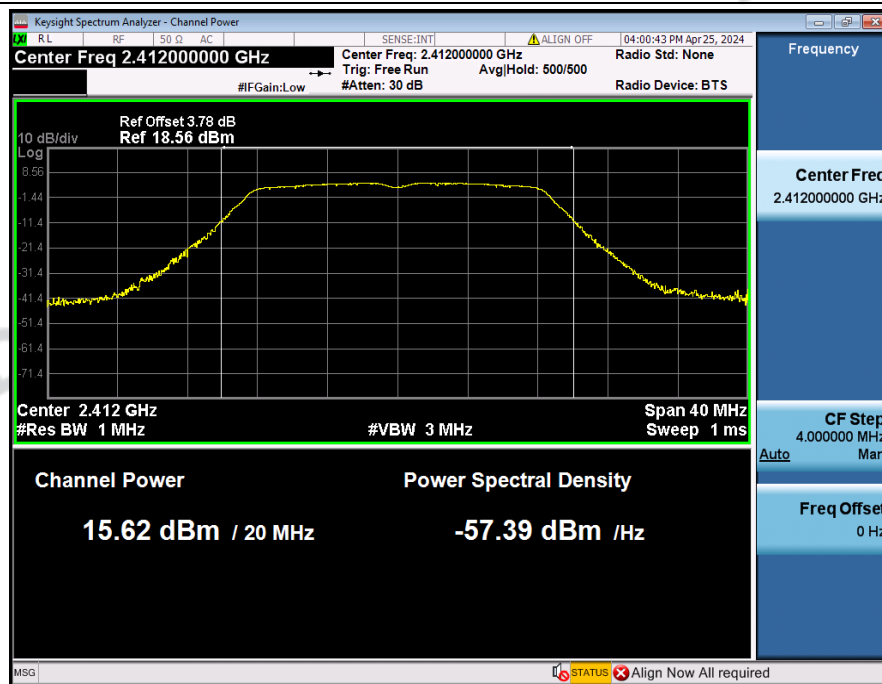


MAX_Output_Power_NVNT_ANT1_802_11n(HT20)_2437

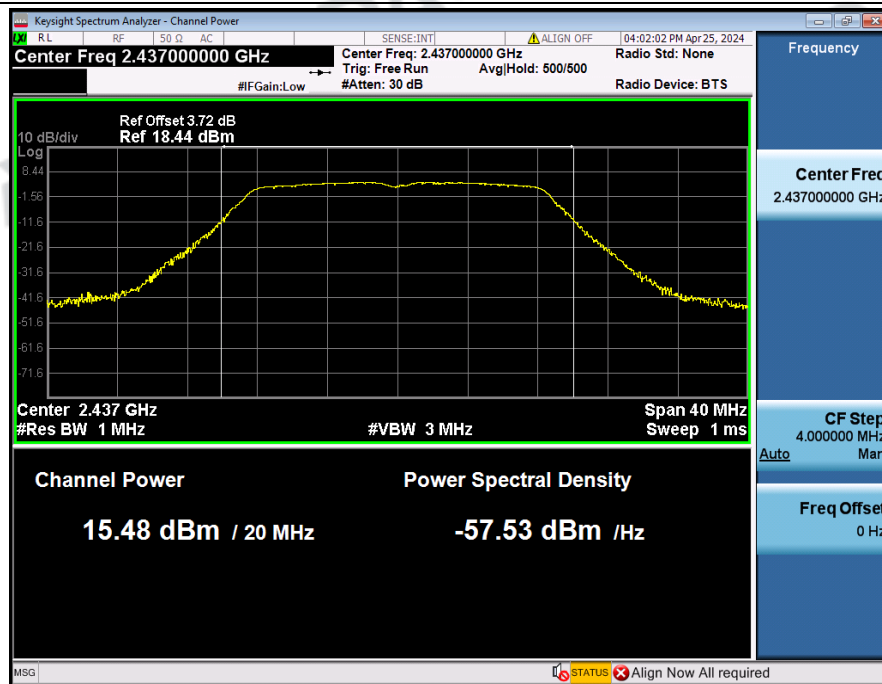


MAX_Output_Power_NVNT_ANT1_802_11n(HT20)_2462

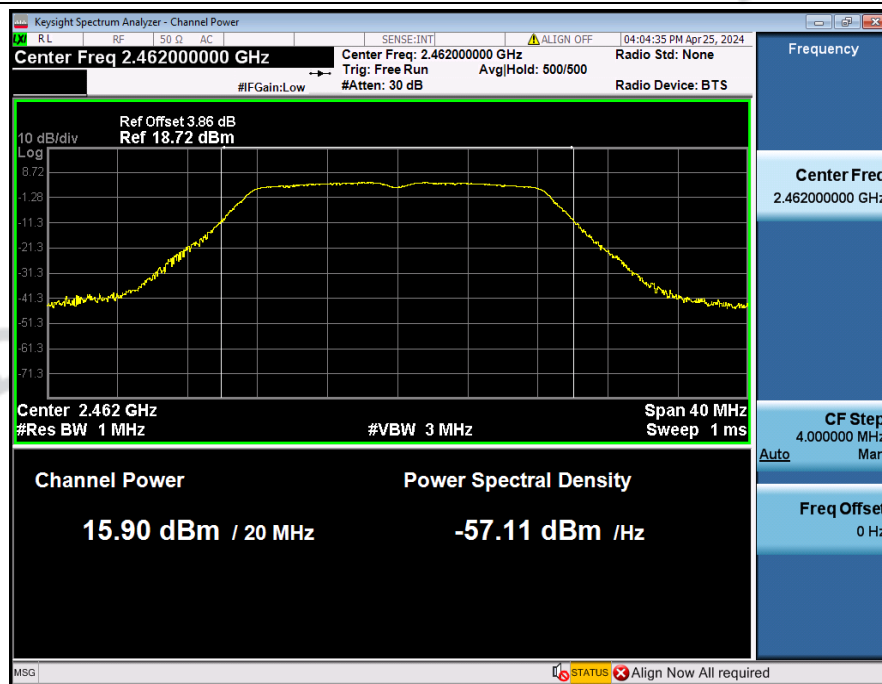


MAX_Output_Power_NVNT_ANT1_802_11n(HT40)_2422

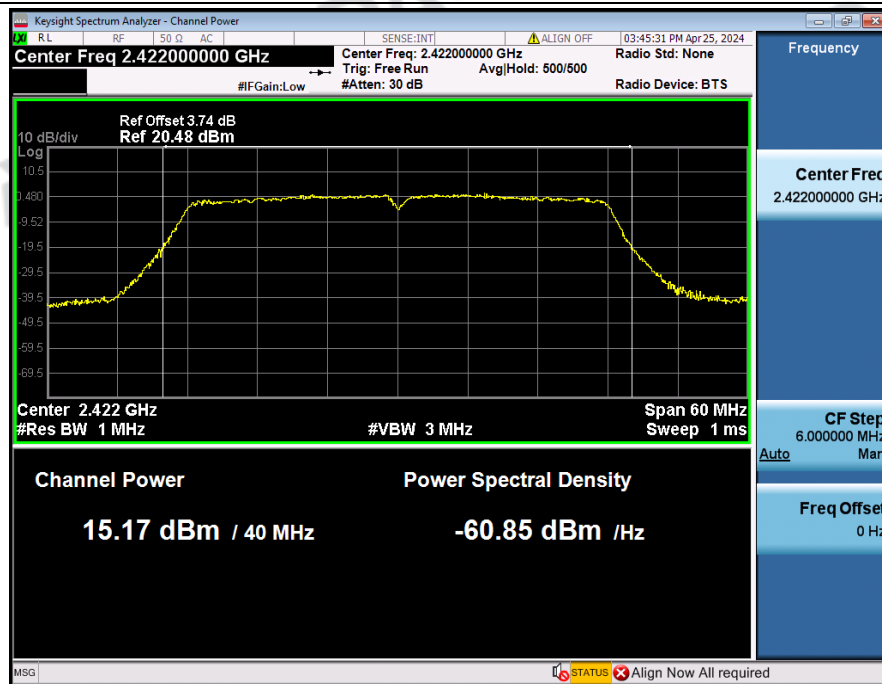


MAX_Output_Power_NVNT_ANT1_802_11n(HT40)_2437

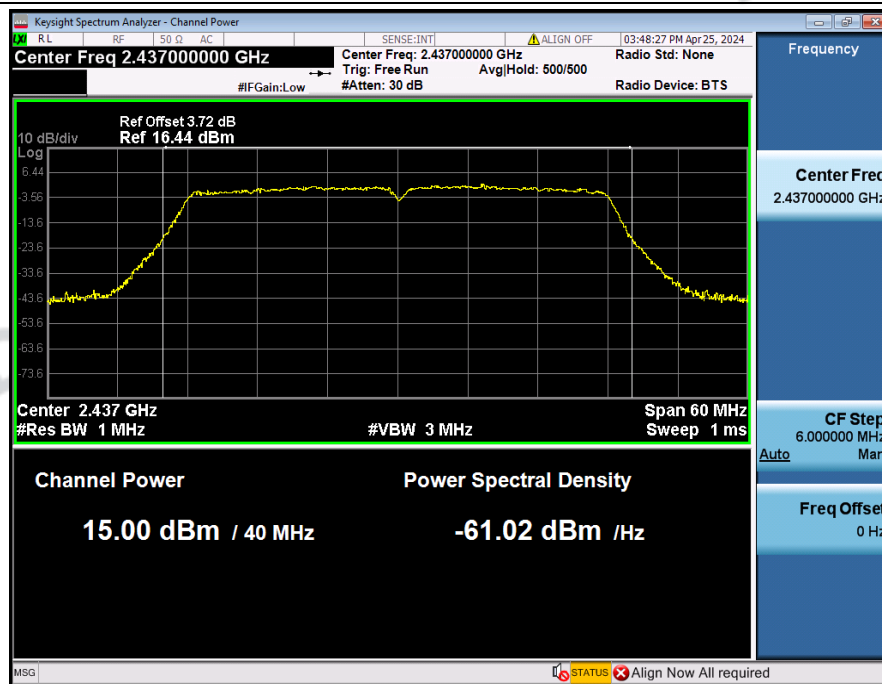


MAX__Output_Power_NVNT_ANT1_802_11n(HT40)_2452

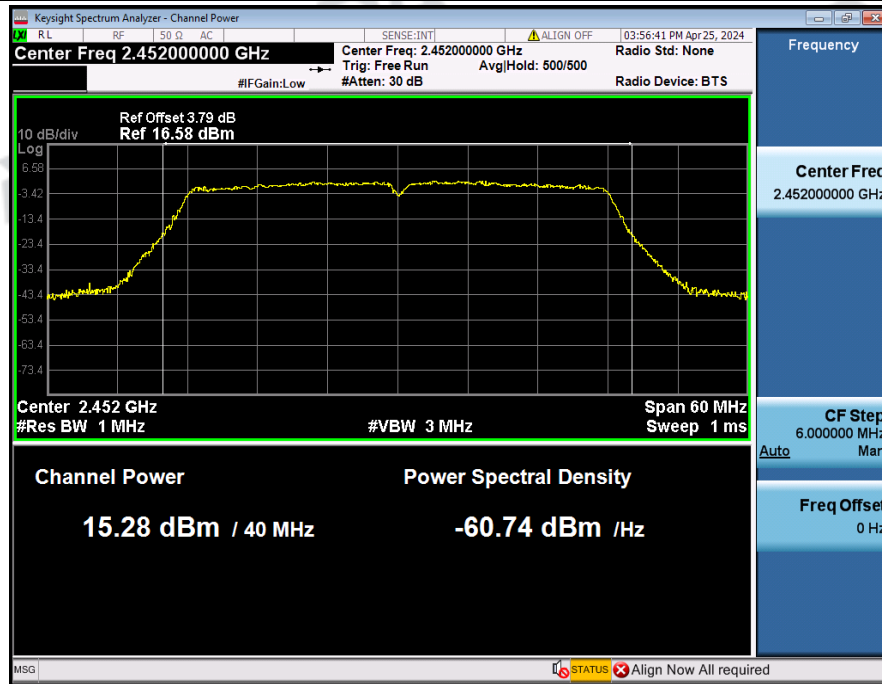


MAX__Output_Power_NVNT_ANT2_802_11b_2412

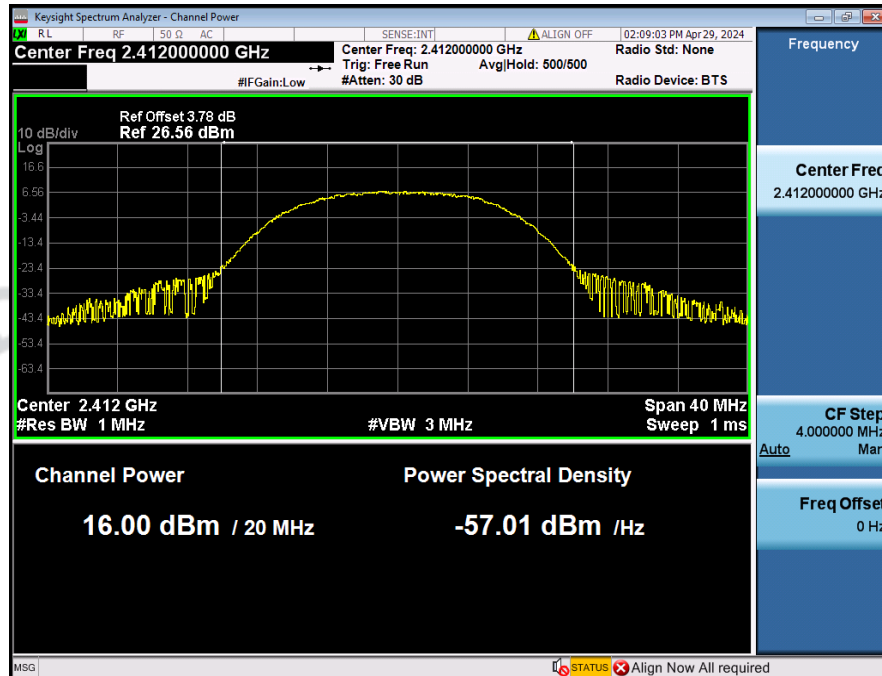


MAX _Output_Power_NVNT_ANT2_802_11b_2437

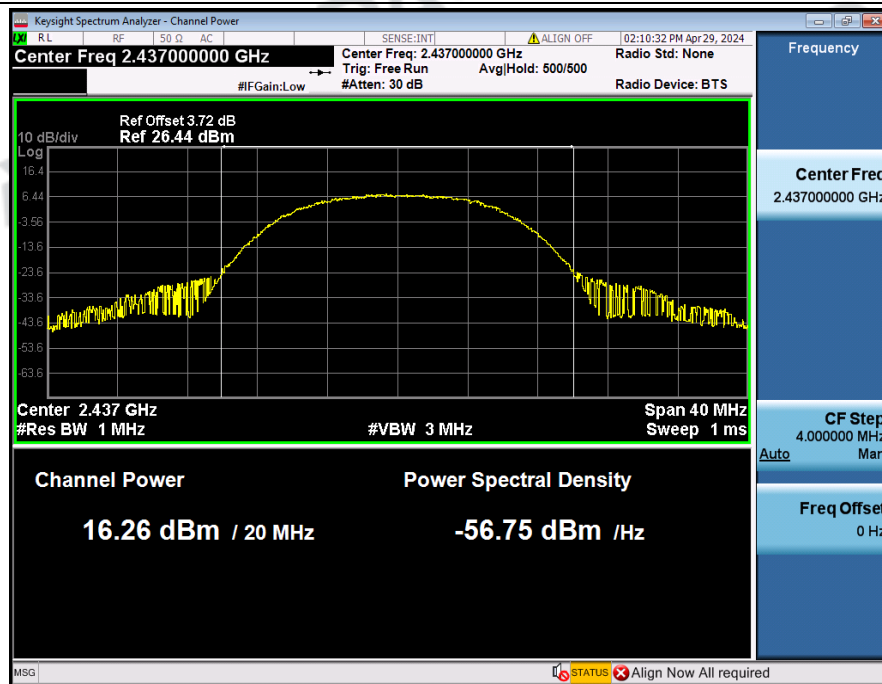


MAX _Output_Power_NVNT_ANT2_802_11b_2462

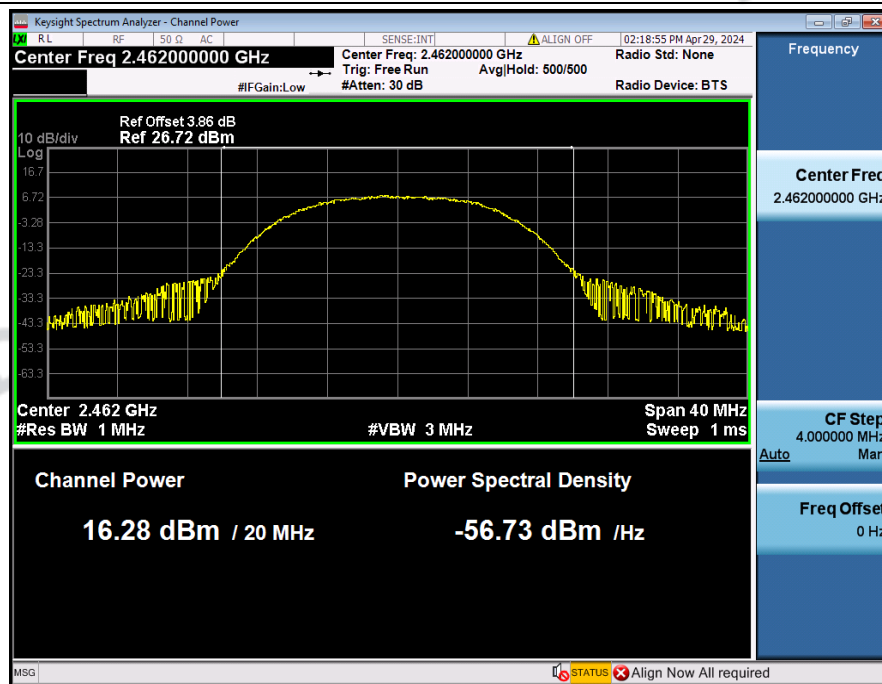


MAX _Output_Power_NVNT_ANT2_802_11g_2412

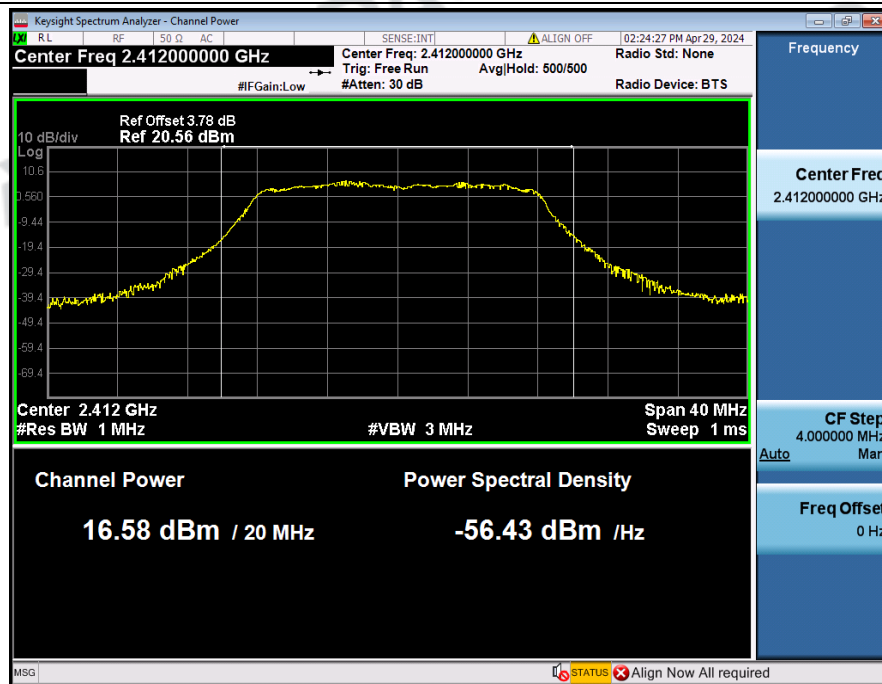

MAX _Output_Power_NVNT_ANT2_802_11g_2437

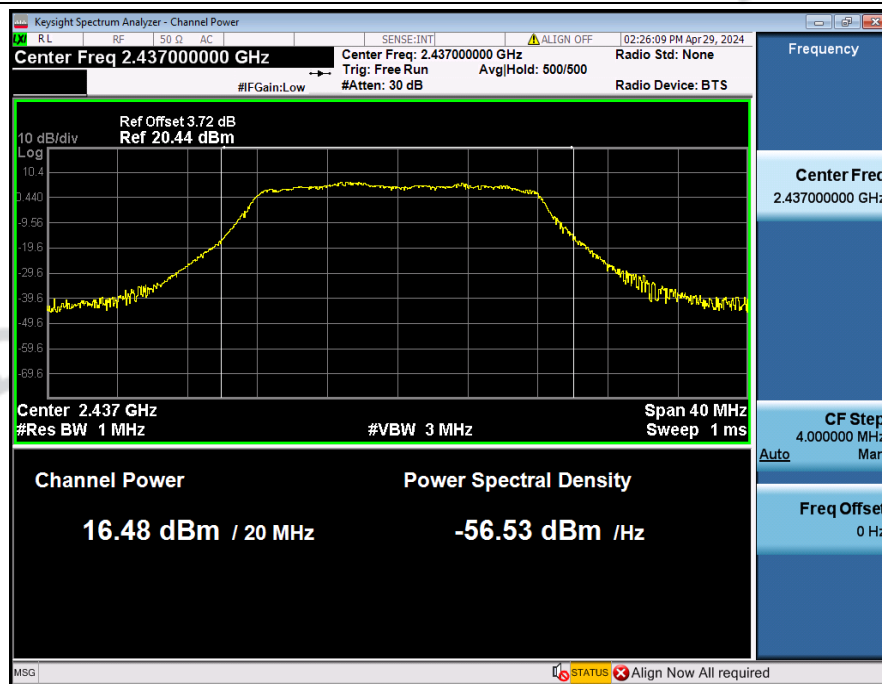

MAX_Output_Power_NVNT_ANT2_802_11g_2462

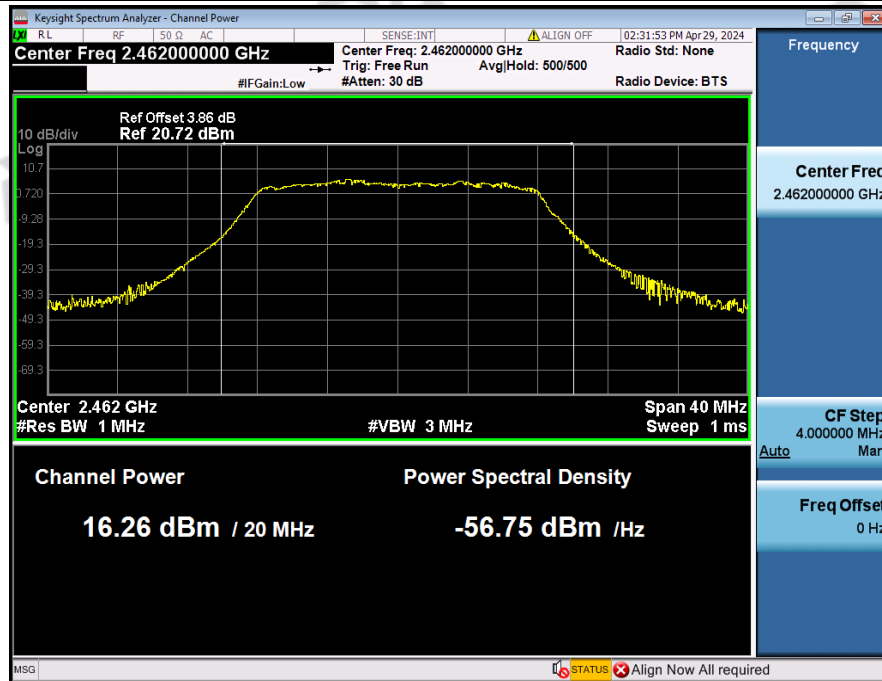

MAX_Output_Power_NVNT_ANT2_802_11n(HT20)_2412

