

ISED CABid: ES1909
Lab. Company Number: 4621A

Test Report No:
78694RRF.001

Partial Test Report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

(*) Identification of item tested	Audio Controller
(*) Trademark	IDNEO
(*) Model and /or type reference	TUX BLUETOOTH
Other identification of the product	FCC ID: 2BGE31TUX0624 IC ID: 32504-1TUX0624
(*) Features	Features: Bluetooth BR/EDR HW version: Sample B3 SW version: 3.6.11
Applicant	IDNEO Technologies, S.A.U Carrer Rec de Dalt, 3 08100 Mollet del Vallès, BARCELONA. SPAIN
Test method requested, standard	USA FCC Part 15.247 (10-1-23 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-23 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 3 (August 2023). CANADA RSS-Gen Issue 5 amendment 2 (February 2021). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Approved by (name / position & signature)	José Manuel Gómez Galván EMC Consumer & RF Lab. Manager
Date of issue	2024-10-03
Report template No	FDT08_25 (*) "Data provided by the client"

Index

INDEX	2
ACRONYMS	3
COMPETENCES AND GUARANTEES	3
GENERAL CONDITIONS	4
UNCERTAINTY	4
DATA PROVIDED BY THE CLIENT	4
USAGE OF SAMPLES	5
TEST SAMPLE DESCRIPTION	6
IDENTIFICATION OF THE CLIENT	6
TESTING PERIOD AND PLACE	7
DOCUMENT HISTORY	7
ENVIRONMENTAL CONDITIONS	7
REMARKS AND COMMENTS	8
TESTING VERDICTS	9
SUMMARY	9
APPENDIX A: TEST RESULTS. BLUETOOTH EDR	10

Acronyms

Acronym ID	Acronym Description
Avg COT	Average Channel Occupancy Time
BW	Bandwidth
Detector	Detector used
Ebw	Emission Bandwidth
Equipment	Equipment Type
Freq	Frequency
Freq Rng	Frequency Range
Freq Sep	Frequency Separation
Inband Peak Lvl	Inband Peak Level
Lvl	Level
MP	Measurement Point
Mod	Modulation
Mode	MIMO Mode
NHC	Number of Hopping Channels
NHp	Number of hops over the period
Occ Ch BW	Occupied Channel Bandwidth
Peak Power	Maximum Peak Conducted Output Power
Pol	Polarization
Port	Active Port
Unwanted Freq	Unwanted Emissions Frequency
Unwanted Lvl	Unwanted Emissions Level

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the conducted testing of EUT is:

RF Peak Output Power: Measurement uncertainty $\leq \pm 0,80$ dB
Accumulated Dwell Time: Measurement uncertainty $\leq \pm 0,16$ %
Minimum Frequency Occupation Time: Measurement uncertainty $\leq \pm 0,53$ %
Hopping Frequency Separation: Measurement uncertainty $\leq \pm 1,74$ %
Occupied Channel Bandwidth: Measurement uncertainty $\leq \pm 1,24$ %
Conducted Band-edge spurious emissions: Measurement uncertainty $\leq \pm 1,76$ dB

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of an Audio Controller. The TUX Controller is a general purpose Linux-based controller that operates system-level functions such as audio and speech processing and BT interfaces.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results. The laboratory is not responsible for such information and it is not covered by accreditation.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	74067_1.1	Audio Controller	TUX BLUETOOTH	23146-00398	2023-08-22	Element Under Test
S/01	74067_2.1	Resistance loads	--	--	2023-08-22	Auxiliary Element
S/01	74067_3.1	Resistance loads	--	--	2023-08-22	Auxiliary Element
S/01	74067_4.1	Resistance loads	--	--	2023-08-22	Auxiliary Element
S/01	74067_13.1	Clyclops bench 5cm	--	--	2023-08-22	Auxiliary Element
S/01	74067_14.1	Antenna	--	--	2023-08-22	Auxiliary Element
S/01	74067_16.1	Harness	--	--	2023-08-22	Auxiliary Element
S/01	74067_17.1	Power cable	--	--	2023-08-22	Auxiliary Element
S/01	74067_18.1	Power cable	--	--	2023-08-22	Auxiliary Element
S/01	74067_20.1	Harness	--	--	2023-08-22	Auxiliary Element
S/02	74067_10.1	Audio Controller	TUX BLUETOOTH	23031-00314	2023-08-22	Element Under Test

Notes referenced to samples during the project:

Id	Type
S/01	Radiated tests.
S/02	Conducted tests.

Test sample description

Ports..... :	Port name and description		Cable					
			Specified max length [m]	Attached during test		Shielded		
	Ethernet		-	[X]		[]		
	A2B		-	[X]		[]		
Speakers		-	[X]		[]			
Supplementary information to the ports..... :	-							
Rated power supply :	Voltage and Frequency			Reference poles				
				L1	L2	L3	N	PE
	[]	AC: -		[]	[]	[]	[]	[]
[X]		DC: 12 V						
Rated Power..... :	-							
Clock frequencies..... :	I2S=3.072MHz, TDM=12.288MHz, A2B=48MHz, DDR4 = 4267MHz, eMMC=400MHz							
Other parameters :	DCDC=2.2MHz, 100BaseT1=100MHz, RGMII=125MHz, SPI = 1MHz, I2C=100kHz							
Software version..... :	3.6.11							
Hardware version :	Sample B3							
Dimensions in cm (W x H x D) ... :	-							
Mounting position :	[]	Table top equipment						
	[]	Wall/Ceiling mounted equipment						
	[]	Floor standing equipment						
	[]	Hand-held equipment						
	[X]	Other: Automotive Component						
Modules/parts..... :	Module/parts of test item			Type		Manufacturer		
	ENW89823C4KF			Bluetooth		Panasonic		
	R8A77960JBR1BG			Microcontroller		Renesas		
Accessories (not part of the test item) :	Description			Type		Manufacturer		
	-			-		-		
Documents as provided by the applicant :	Description			File name		Issue date		
	-			-		-		

Identification of the client

IDNEO Technologies, S.A.U
Carrer Rec de Dalt, 3, 08100, Mollet del Vallès, Barcelona. Spain

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2023-09-12
Date (finish)	2024-08-29

Document history

Report number	Date	Description
78694RRF.001	2024-10-03	First release.

Environmental conditions

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Alvaro Gutierrez Naranjo, Valentin Andarias Diaz.
Used instrumentation:

Control No.	Equipment	Model	Manufacturer	Next Calibration
07445	DC POWER SUPPLY 30V/5A	U8002A	KEYSIGHT TECHNOLOGIES	N/A
05850	DIGITAL MULTIMETER	179	FLUKE	2024-11-02
07760	DIGITAL MULTIMETER	175	FLUKE	2024-11-08
10304	EMI TEST RECEIVER 2Hz-44GHz	ESW44	ROHDE AND SCHWARZ	2026-02-19
06615	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2025-04-04
06609	ETHERNET TEMPERATURE AND HUMIDITY LOGGER	HWg-STE	HW GROUP	2025-04-22
07040	EXTENSION FOR OPEN SWITCH UNIT UP TO 40GHz	OSP-B157Wx	ROHDE AND SCHWARZ	2025-04-19
08848	OPEN SWITCH UNIT UP TO 7.5 GHz	OSP-B157W8 PLUS	ROHDE & SCHWARZ	2024-12-21
00922	POWER SUPPLY DC 40 V / 40 A	NGPE 40/40	ROHDE AND SCHWARZ	N/A
07794	SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2025-04-21
06668	SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2024-12-14
07791	SIGNAL GENERATOR 8kHz-6GHz	SMB100B	ROHDE AND SCHWARZ	2026-03-15
07793	SIGNAL GENERATOR 8kHz-6GHz	SMBV100B	ROHDE AND SCHWARZ	2026-03-11
04848	SOFTWARE FOR EMC/RF TESTING	EMC32	ROHDE AND SCHWARZ	N/A
06611	TEMPERATURE AND HUMIDITY PROBE	HWg-STE	HW GROUP	2025-04-04
07798	WMS32	WMS32	ROHDE AND SCHWARZ	N/A

Testing verdicts

Fail	F
Inconclusive	I
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

Bluetooth EDR

Requirement – Test case	FCC PART 15 PARAGRAPH / RSS-247	Verdict	Remark
FCC 15.247 (a) (1) / RSS-247 5.1 (b)	20 dB Bandwidth	P	
FCC 15.247 (a) (1) (iii) / RSS-247 5.1 (d)	Time of Occupancy (Dwell Time)	P	
FCC 15.247 (b) / RSS-247 5.4. (b)	Maximum peak output power and	P	
FCC 15.247 (a) (1) (iii) / RSS-247 5.1 (d)]	Number of hopping channels	P	
FCC 15.247 (d) / RSS-247 5.5	Band-edge emissions compliance	P	
FCC 15.247 (d) / RSS-247 5.5	Emission limitations radiated (Transmitter)	N/M	(1)
<u>Supplementary information and remarks:</u> (1) Only conducted tests have been requested.			

Appendix A: Test results. Bluetooth EDR

TEST CONDITIONS	12
TEST CASES DETAILS	15
<i>99dBw Occupied Channel Bandwidth 99%</i>	15
<i>RSS-247 5.1 (b) / FCC 15.247 (a) (1) [20dBW] 20 dB Bandwidth and Carrier Frequency Separation</i>	27
<i>RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Time of Occupancy (Dwell Time)</i>	39
<i>RSS-247 5.1 (b) / FCC 15.247 (a) (1) [CFS] Carrier Frequency Separation</i>	45
<i>RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels</i>	51
<i>RSS-247 5.4 (b) / FCC 15.247 (b) (1) [Pkcp] Maximum Peak Conducted output power</i>	57
<i>RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)</i>	69

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (*):

Vnominal: 12Vdc
Type of Power Supply: External power supply

ANTENNA (*):

Type of Antenna: External antenna
Maximum Declared Antenna Gain: -1.54 dBi

TEST FREQUENCIES (*):

Modulation	Data rates	Low Channel:	Middle Channel	High Channel
BTEDR GFSK	1-DH5	2402 MHz	2441 MHz	2480 MHz
BTEDR PI/4 DQPSK	2-DH5	2402 MHz	2441 MHz	2480 MHz
BTEDR 8DPSK	3-DH5	2402 MHz	2441 MHz	2480 MHz

During transmitter test the EUT was controlled by a SW tool provided by the client to operate in a continuous transmit mode on the modulation schemes and test channels as required.

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

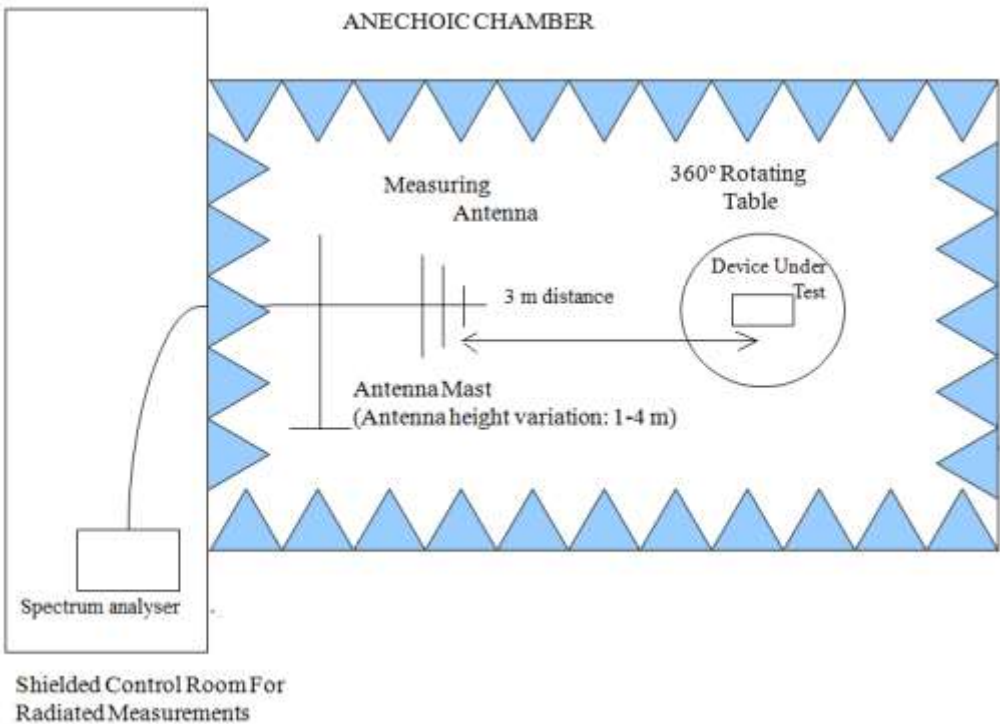

Radiated measurements setup from 1 GHz to 17 GHz:

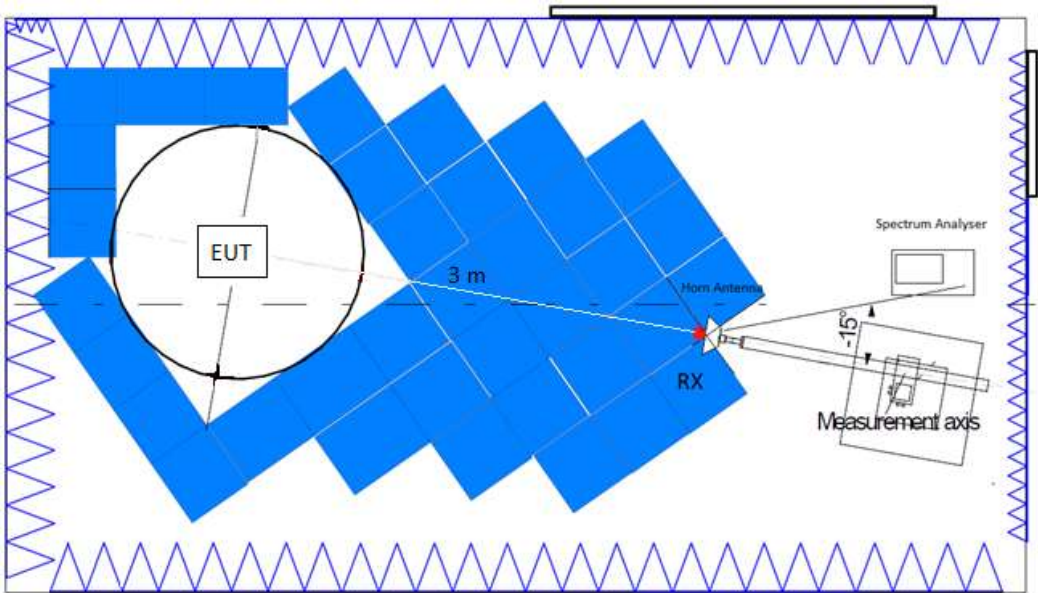

Radiated measurements setup $f > 17$ GHz:

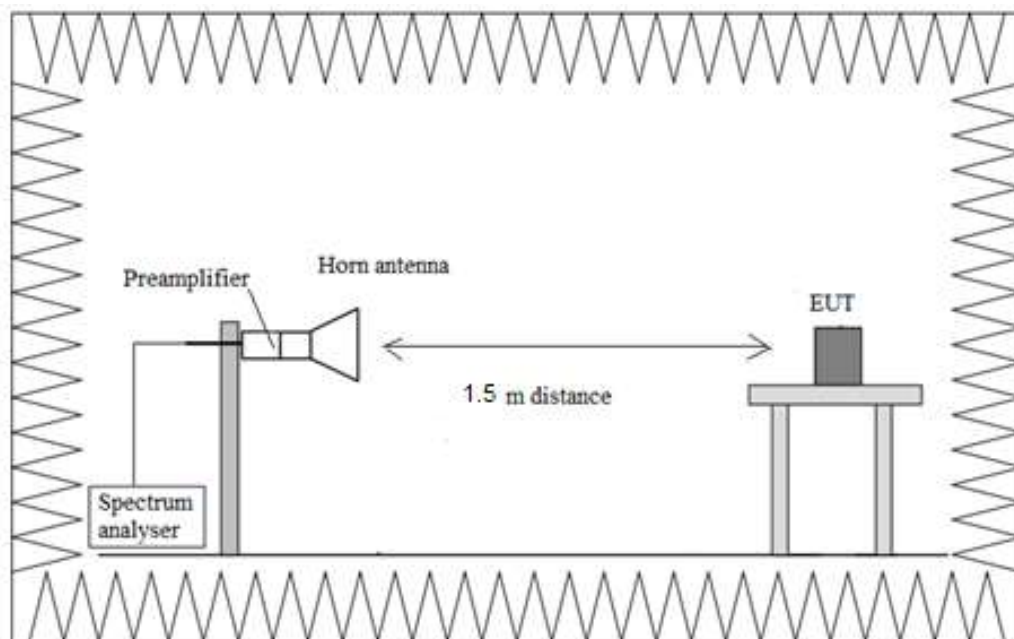

TEST CASES DETAILS

99dBw Occupied Channel Bandwidth 99%

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	0.850000
		2440.00000		0.865000
		2480.00000		0.865000



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1



Images:

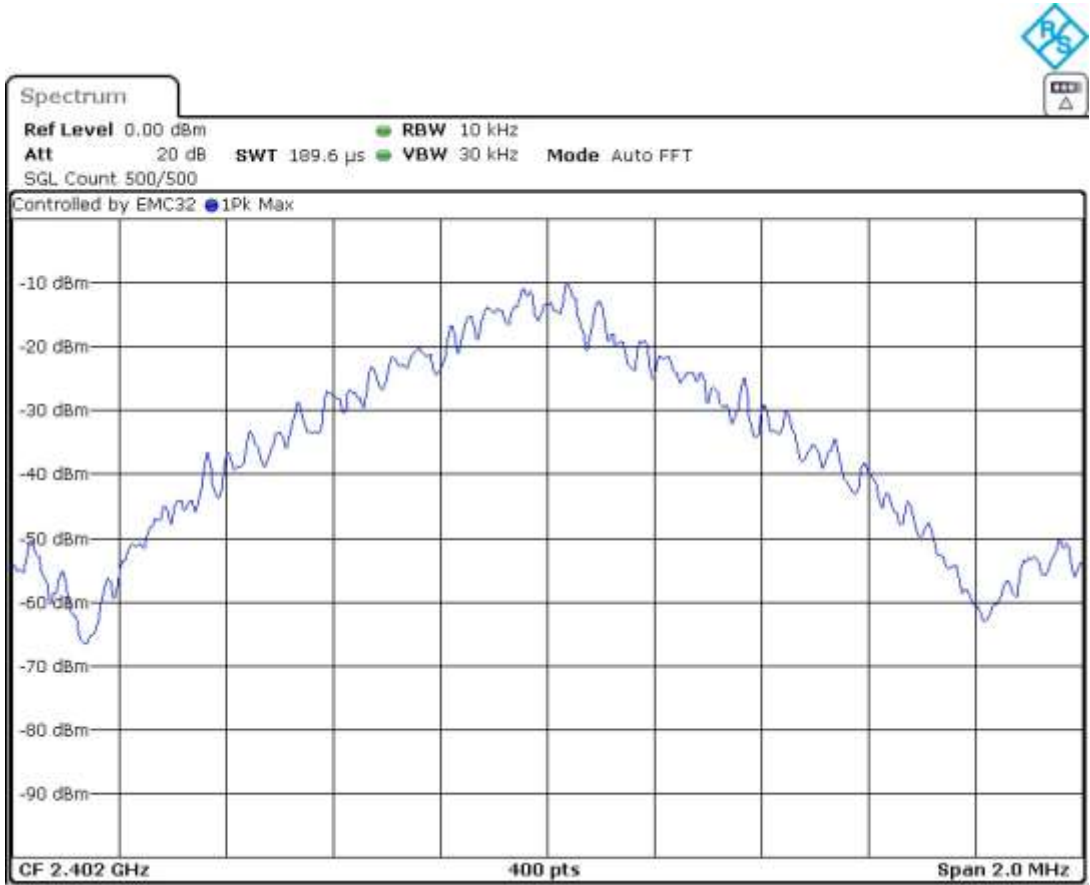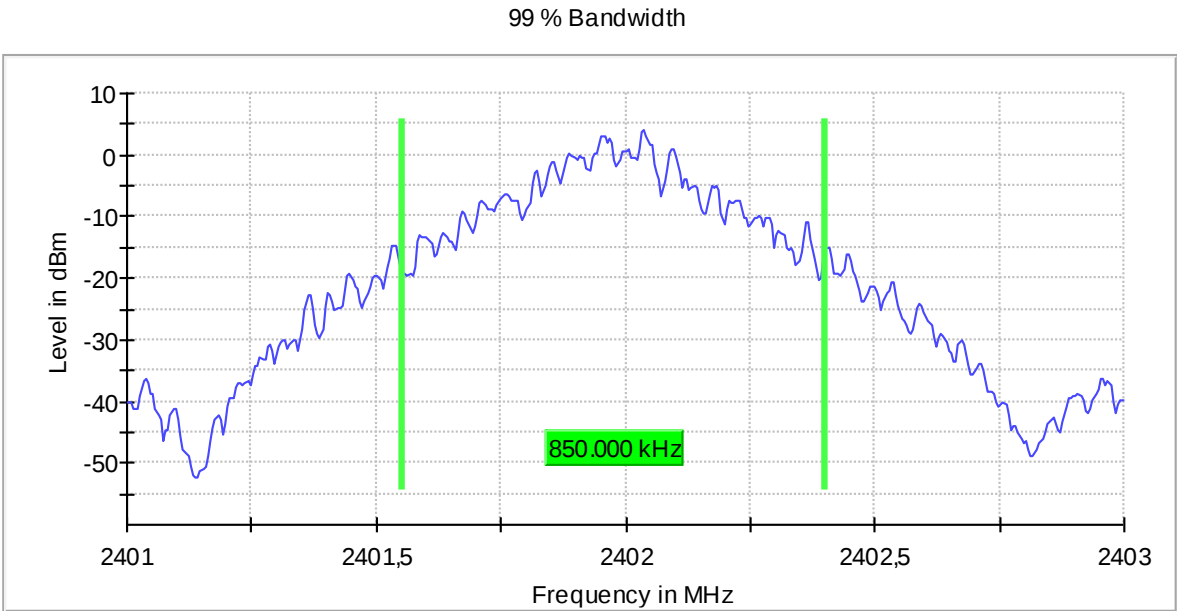

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2440.00000
MIMO Mode = SISO Active Port = 1

Images:



99 % Bandwidth

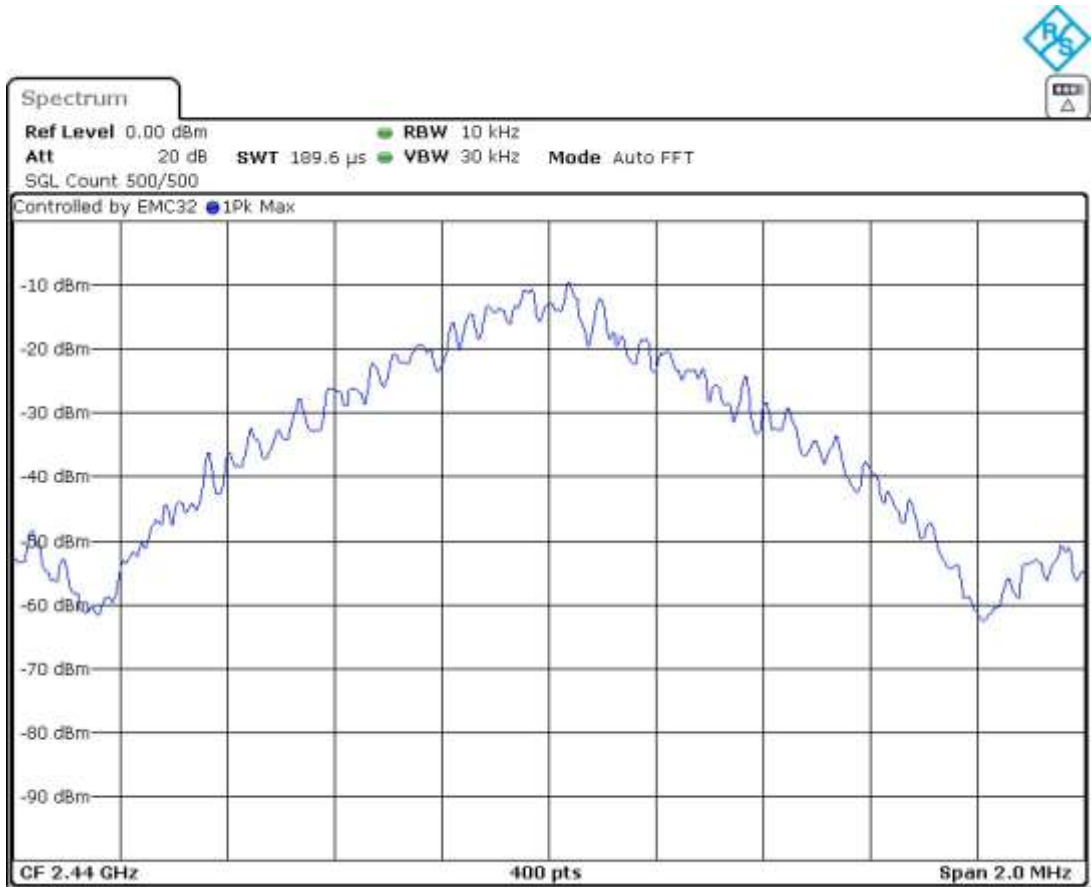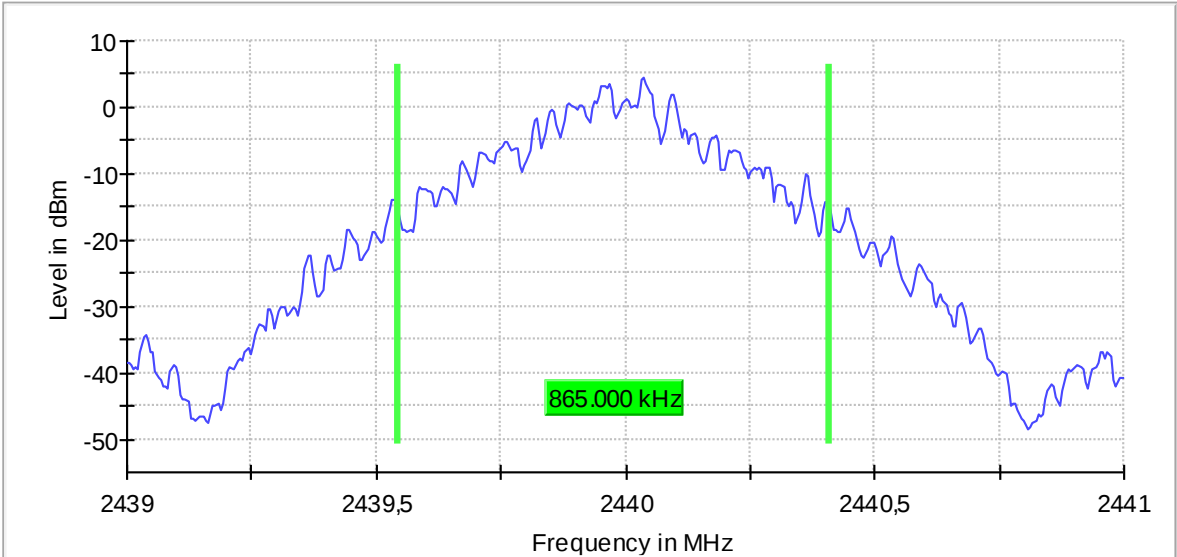

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

99 % Bandwidth

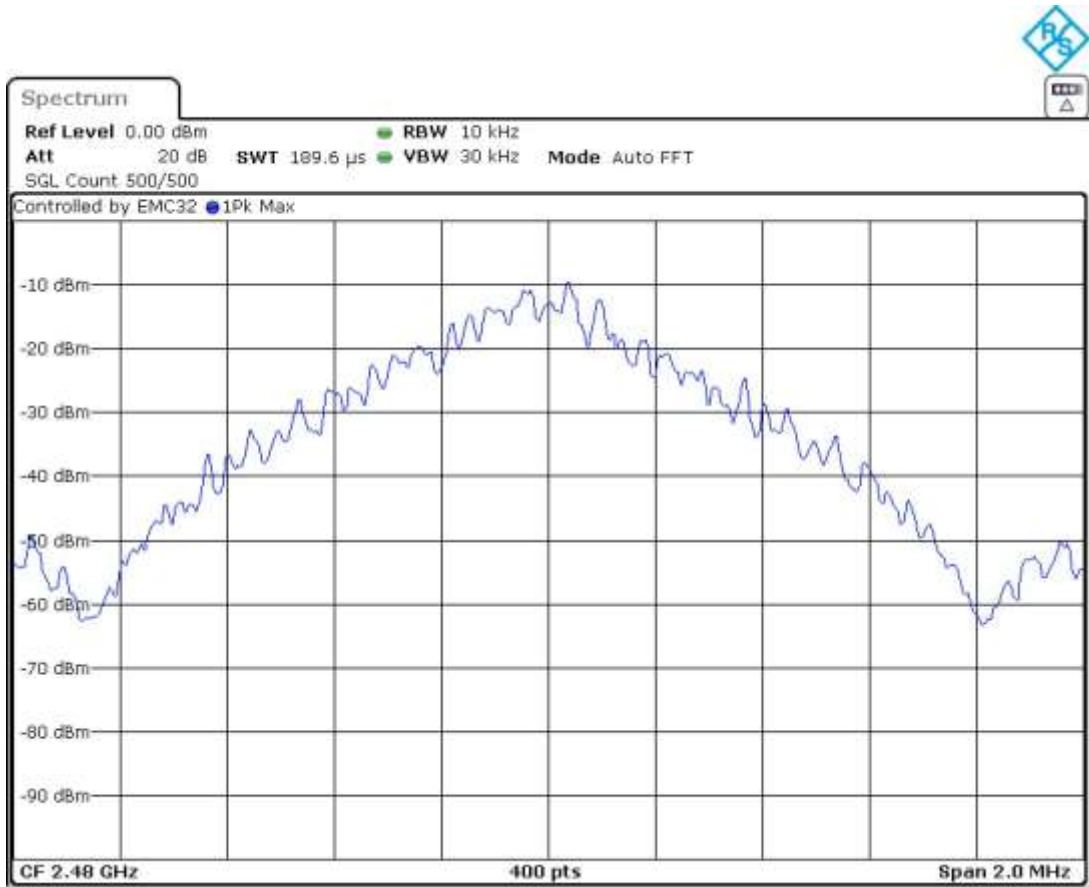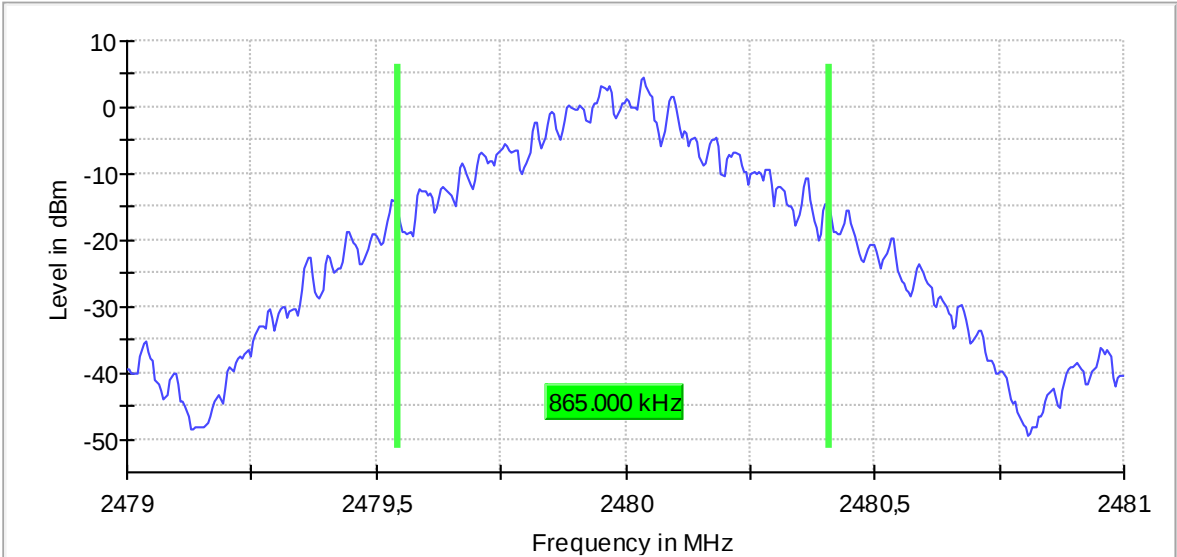

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	1.230000
		2440.00000		1.220000
		2480.00000		1.225000

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

99 % Bandwidth

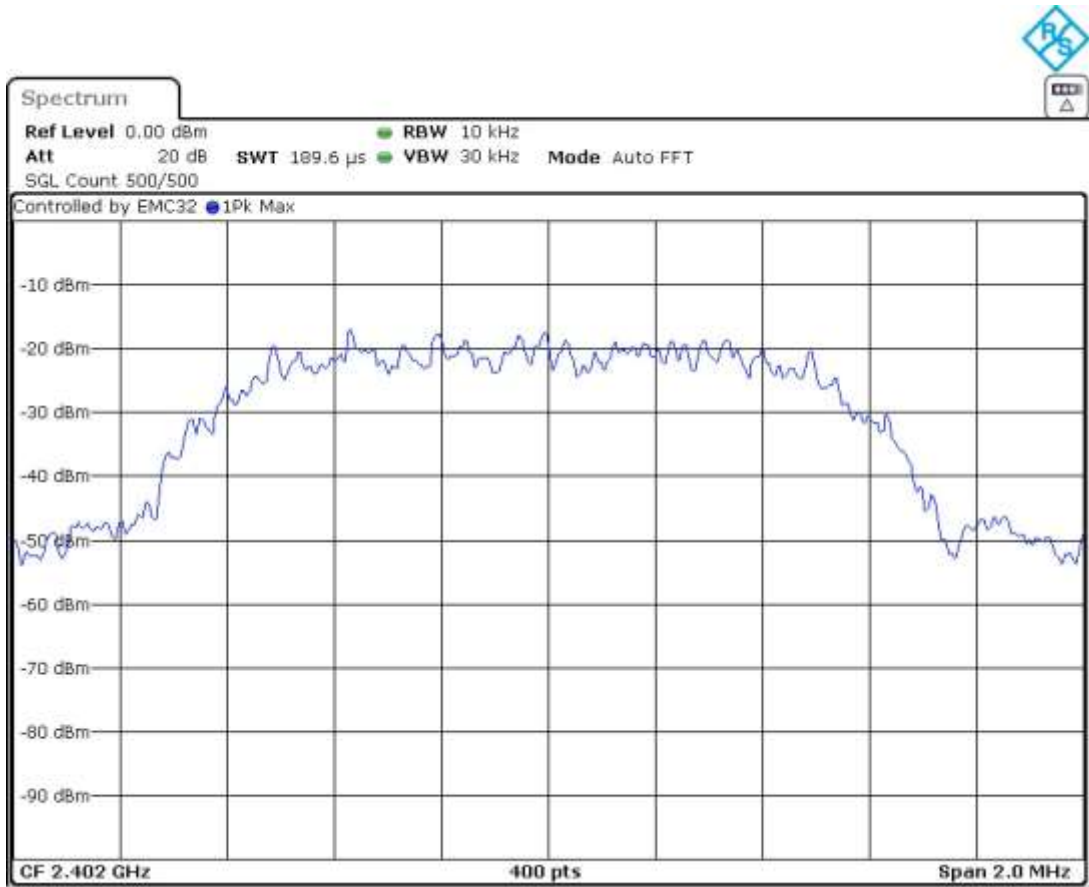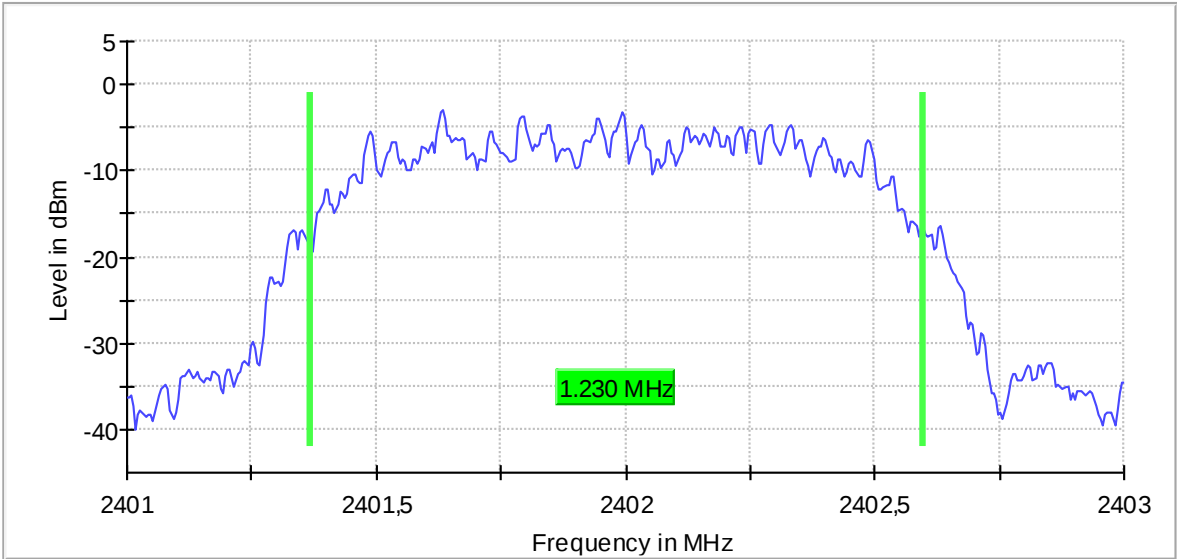

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2440.00000

Active Port = 1



Images:

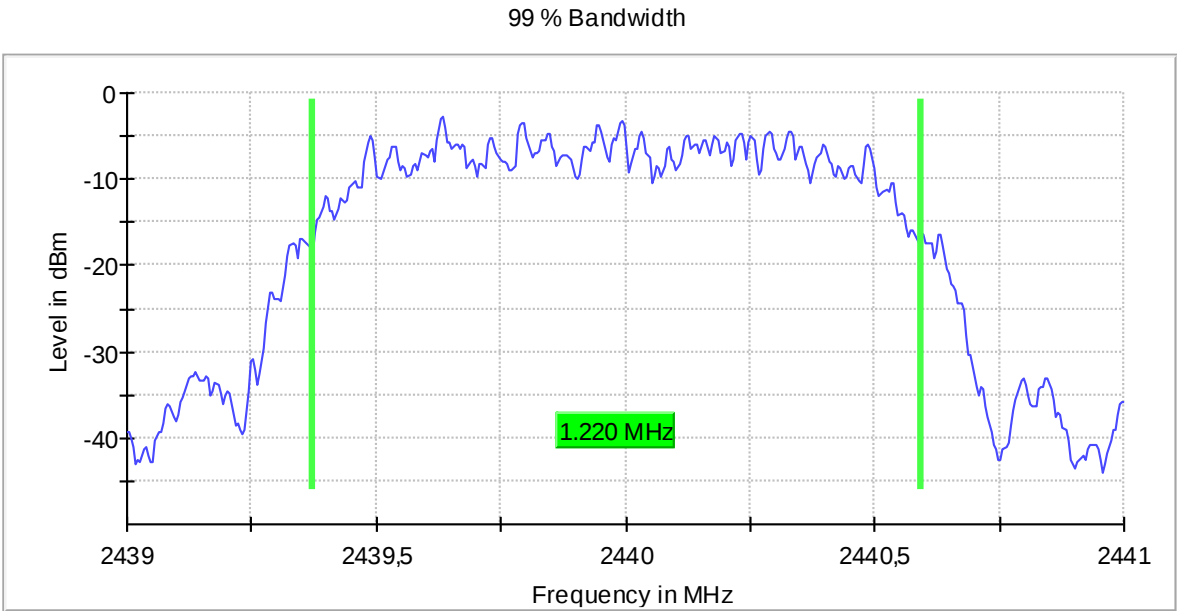

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

99 % Bandwidth

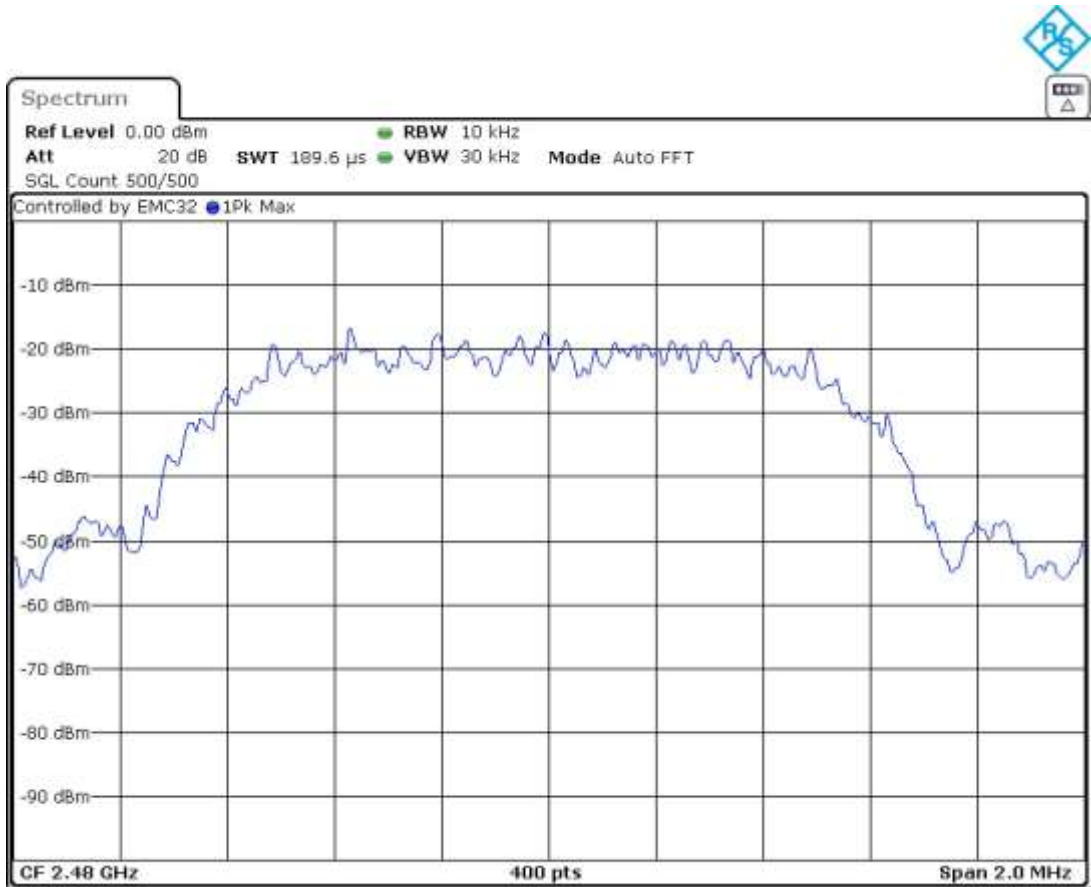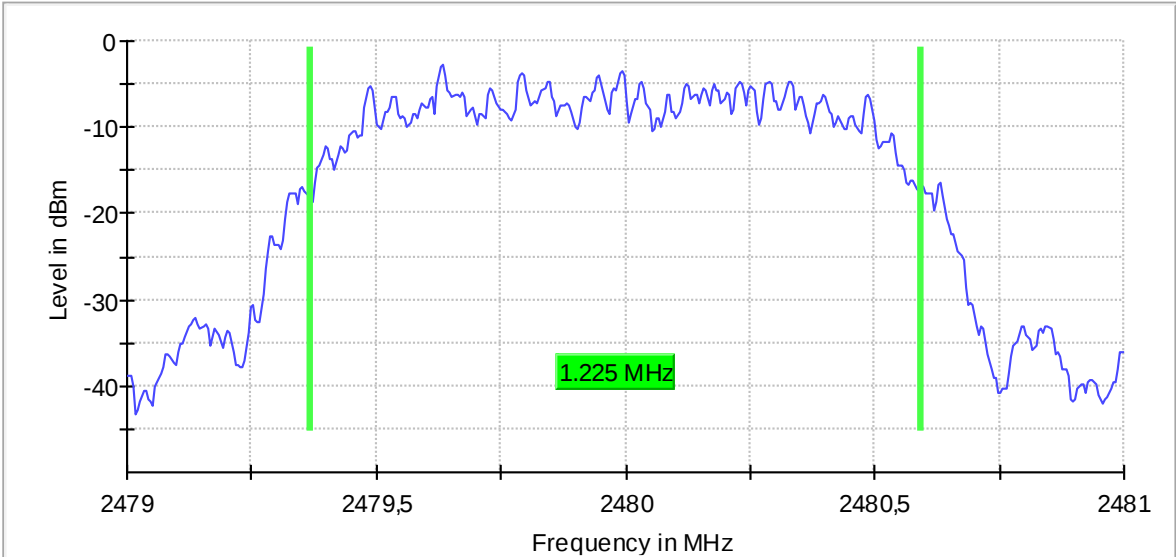

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Occ Ch BW (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	1.230000
		2440.00000		1.220000
		2480.00000		1.220000

Verdict


Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:


99 % Bandwidth

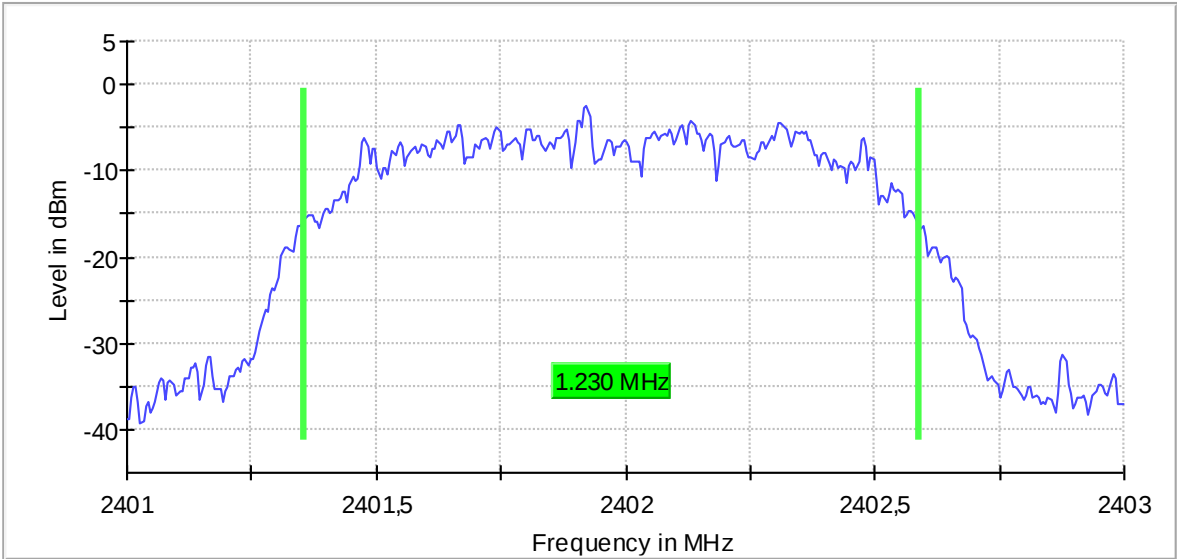

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2440.00000
MIMO Mode = SISO Active Port = 1

Images:



99 % Bandwidth

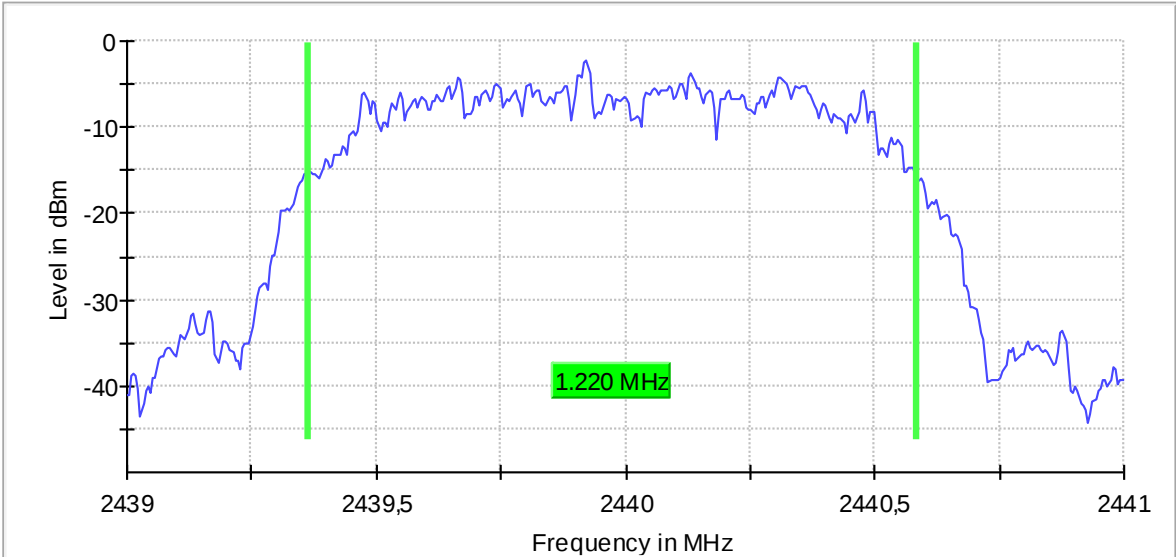

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

99 % Bandwidth

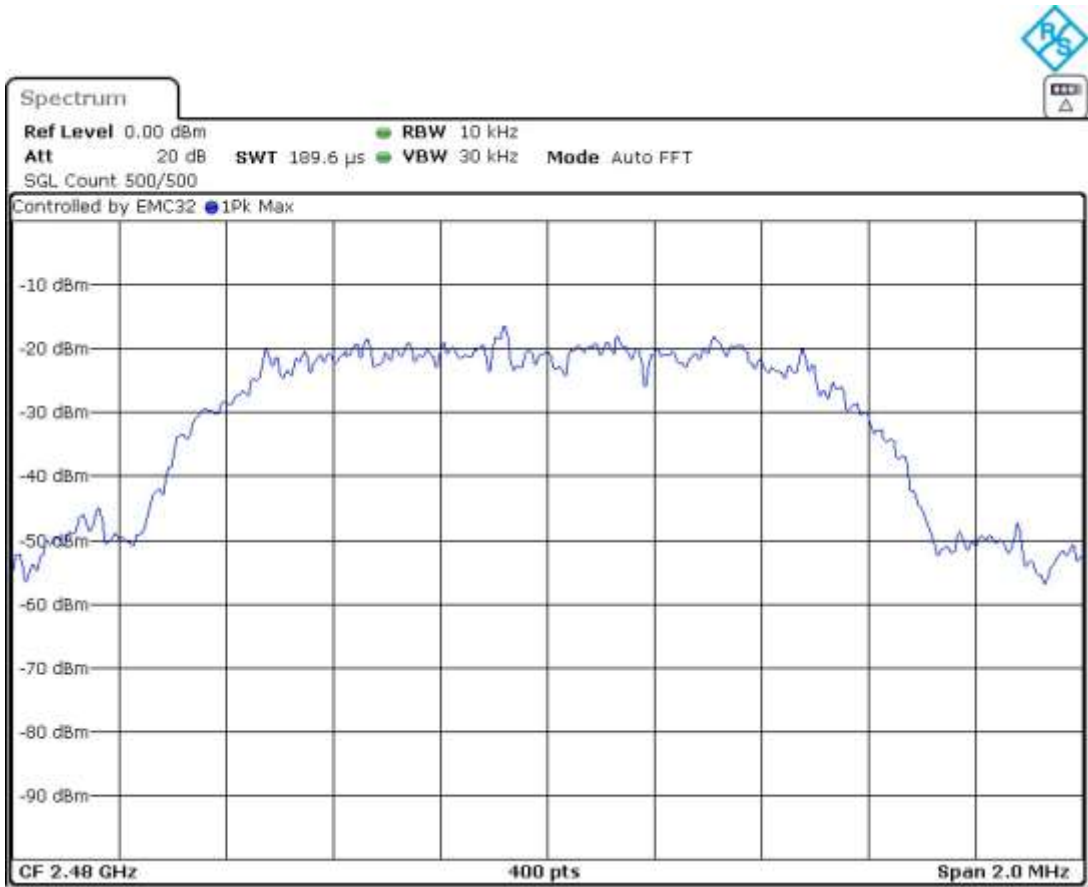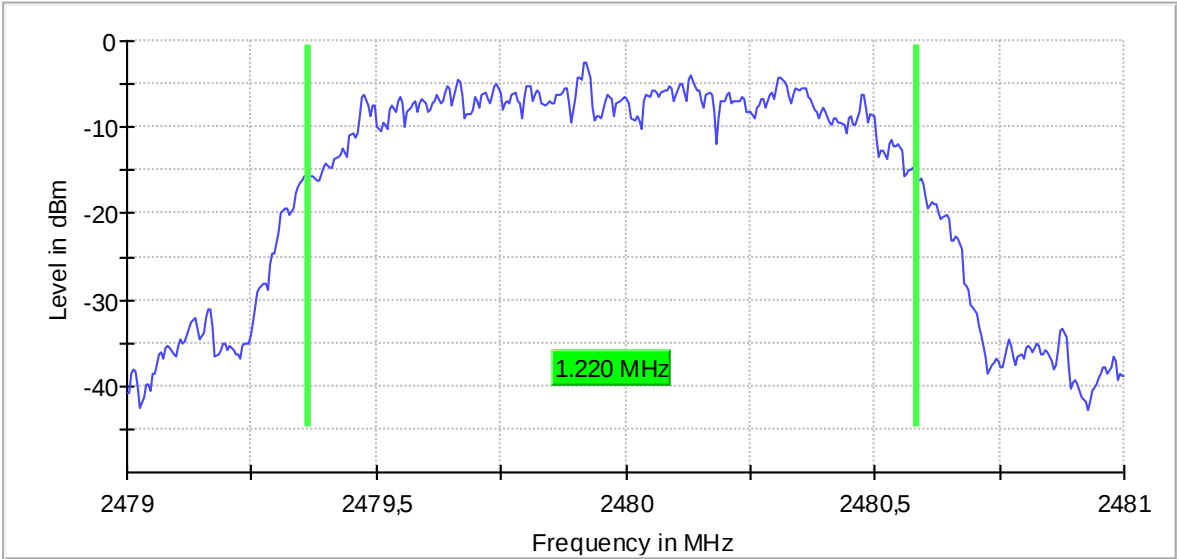

RSS-247 5.1 (b) / FCC 15.247 (a) (1) [20dBW] 20 dB Bandwidth and Carrier Frequency Separation

Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

20 DB BANDWIDTH:

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Ebw (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	0.925000
		2440.00000		0.925000
		2480.00000		0.925000

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
 Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
 MIMO Mode = SISO Active Port = 1

Images:



20 dB Bandwidth

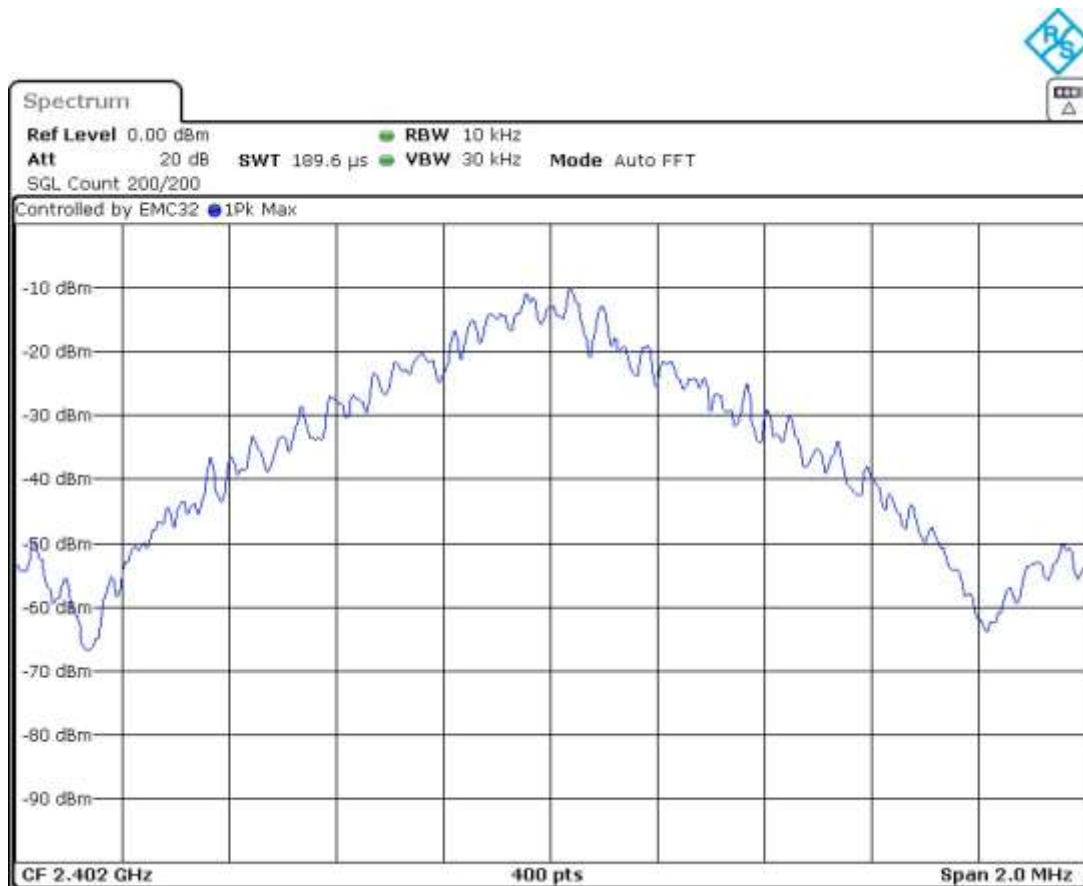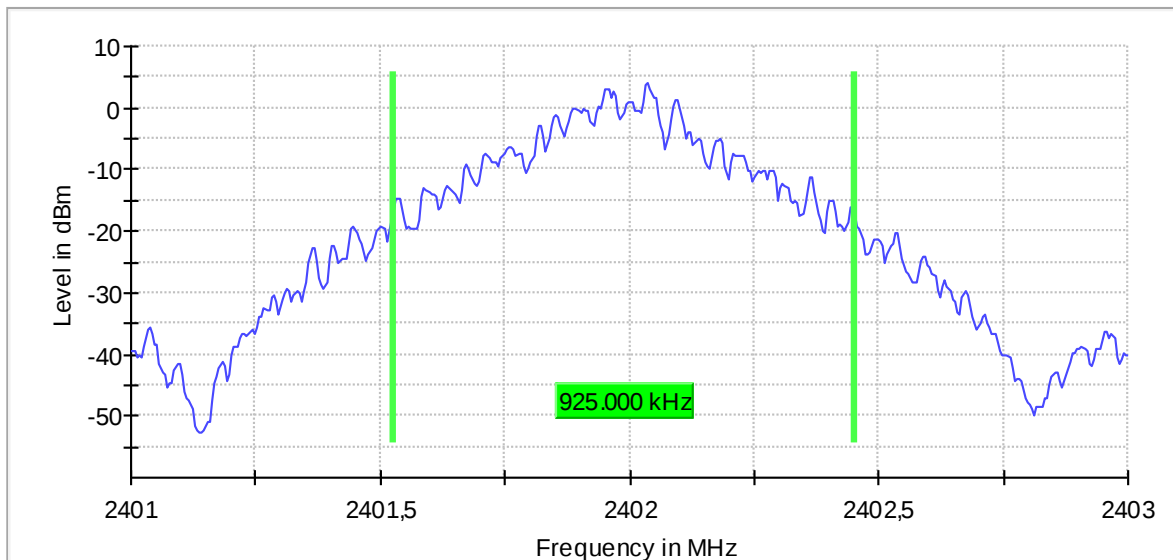

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2440.00000
MIMO Mode = SISO Active Port = 1

Images:



20 dB Bandwidth

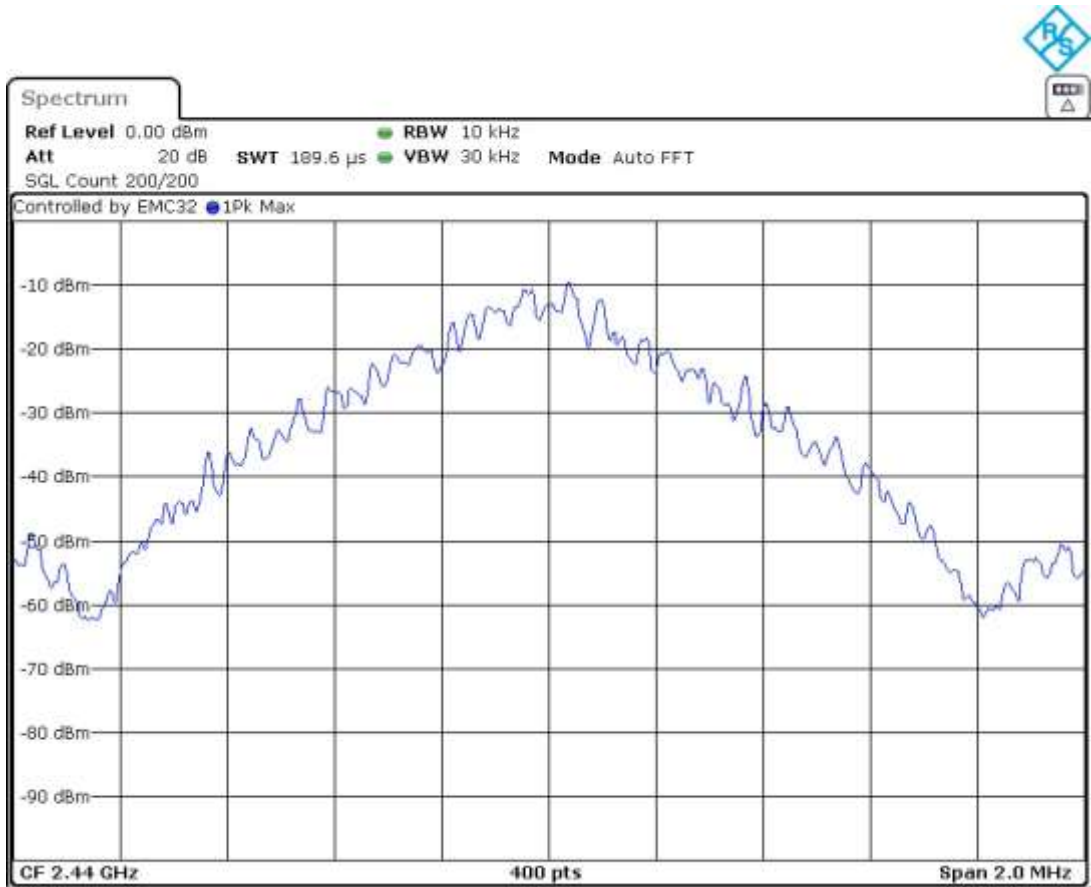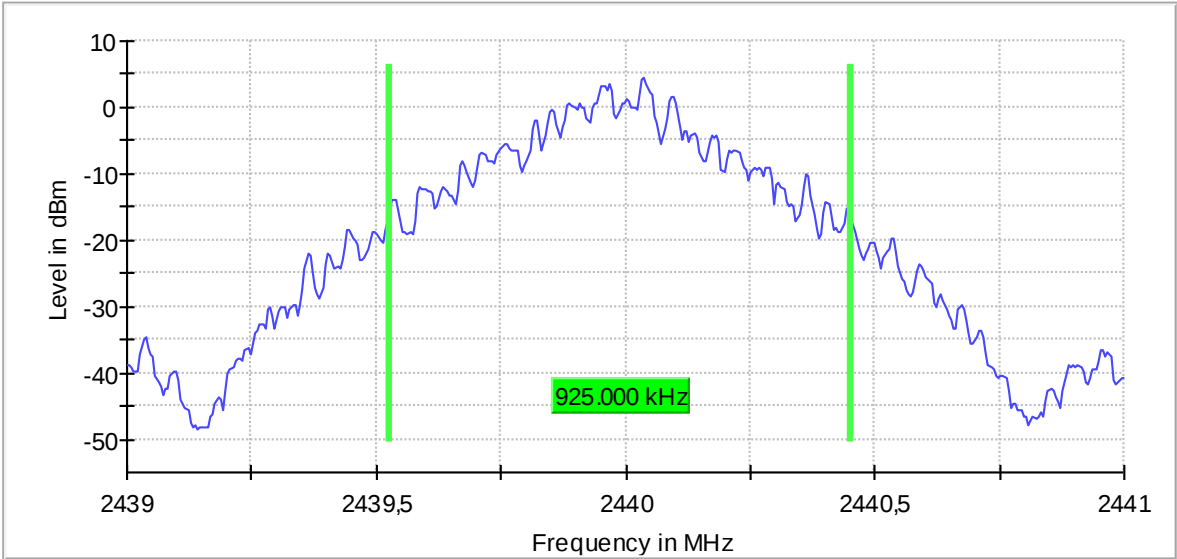

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

20 dB Bandwidth

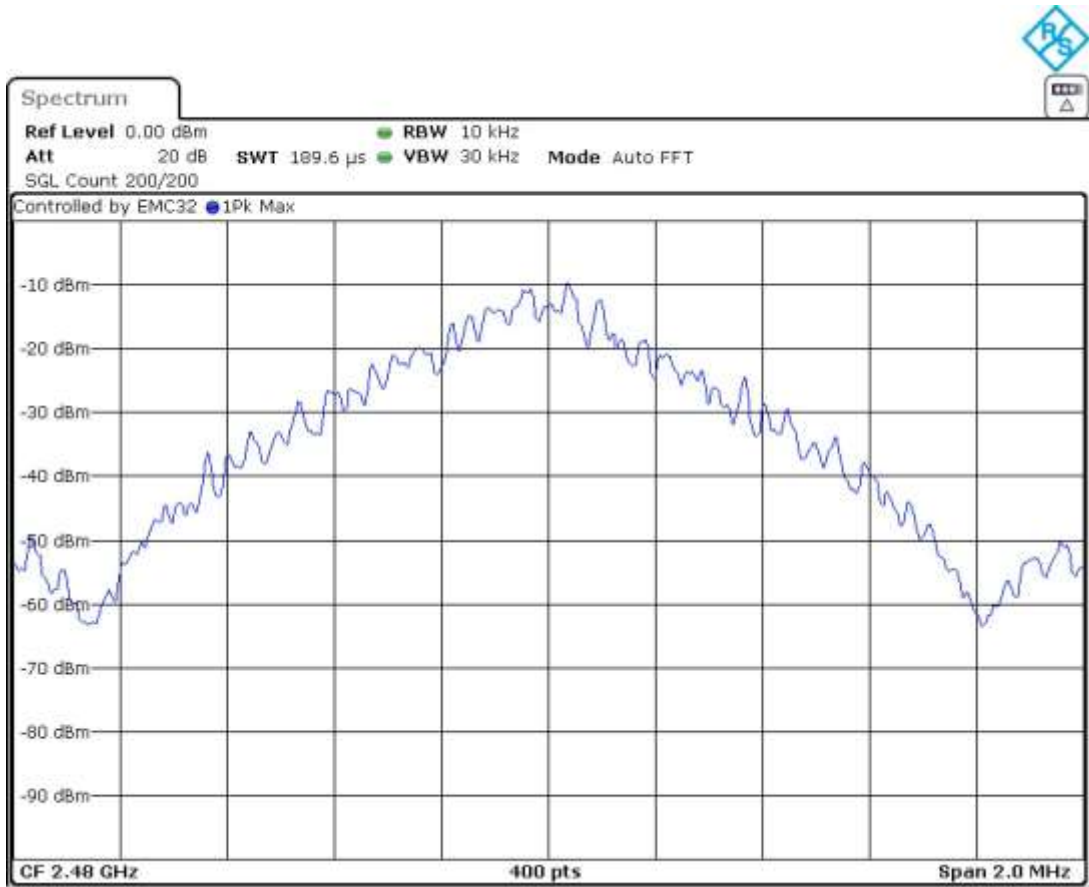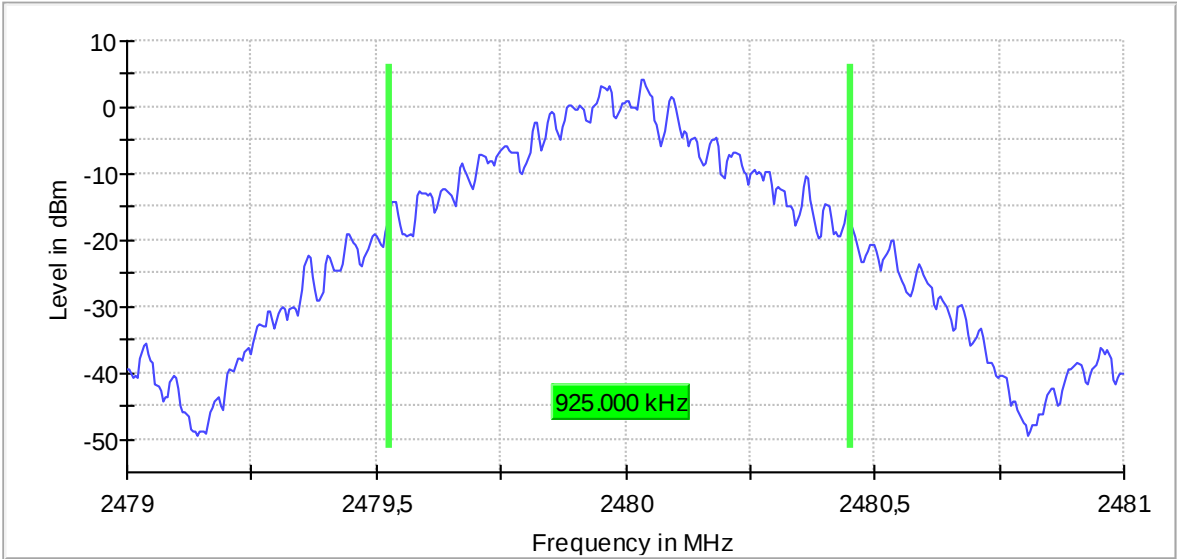

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Ebw (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	1.390000
		2440.00000		1.355000
		2480.00000		1.350000

Verdict


Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

20 dB Bandwidth

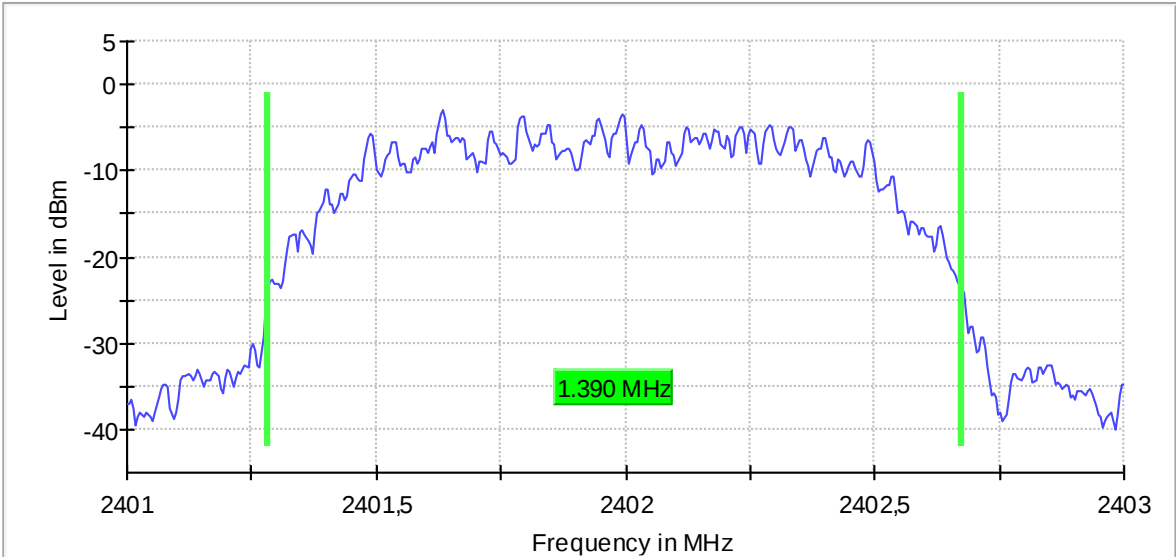

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)



MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2440.00000

Active Port = 1


Images:

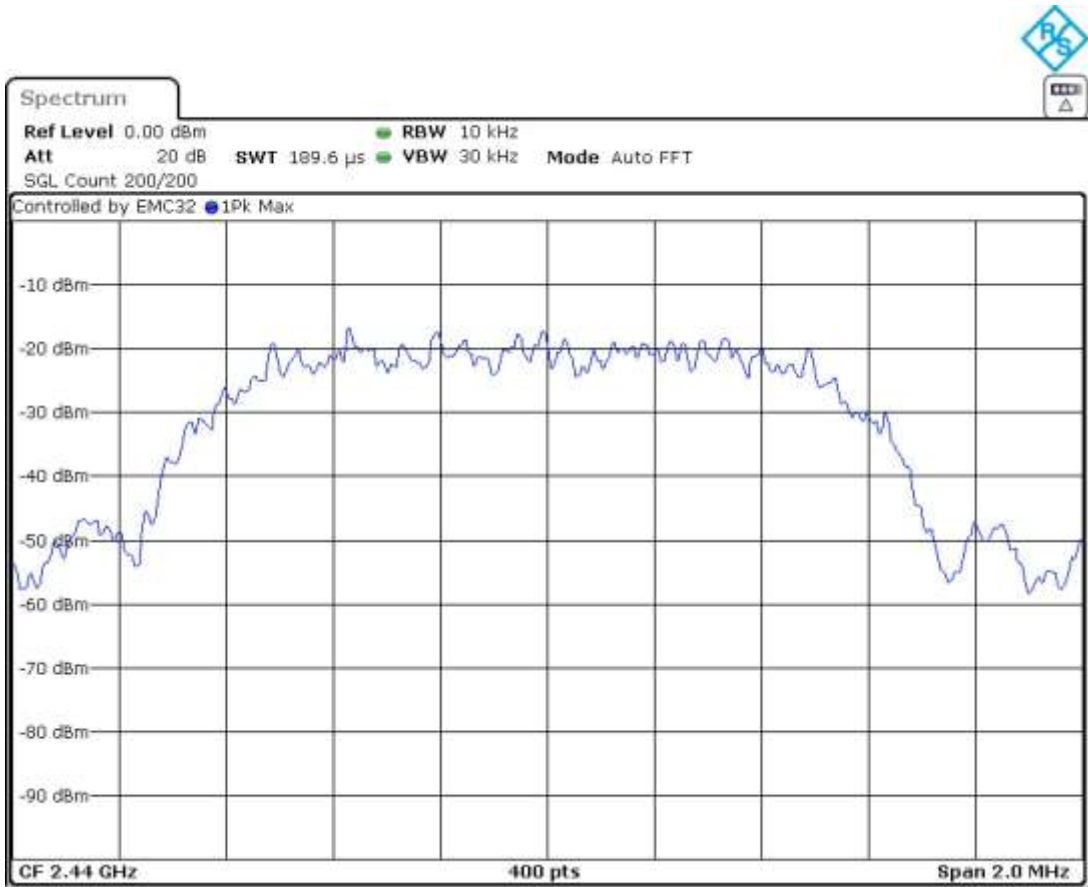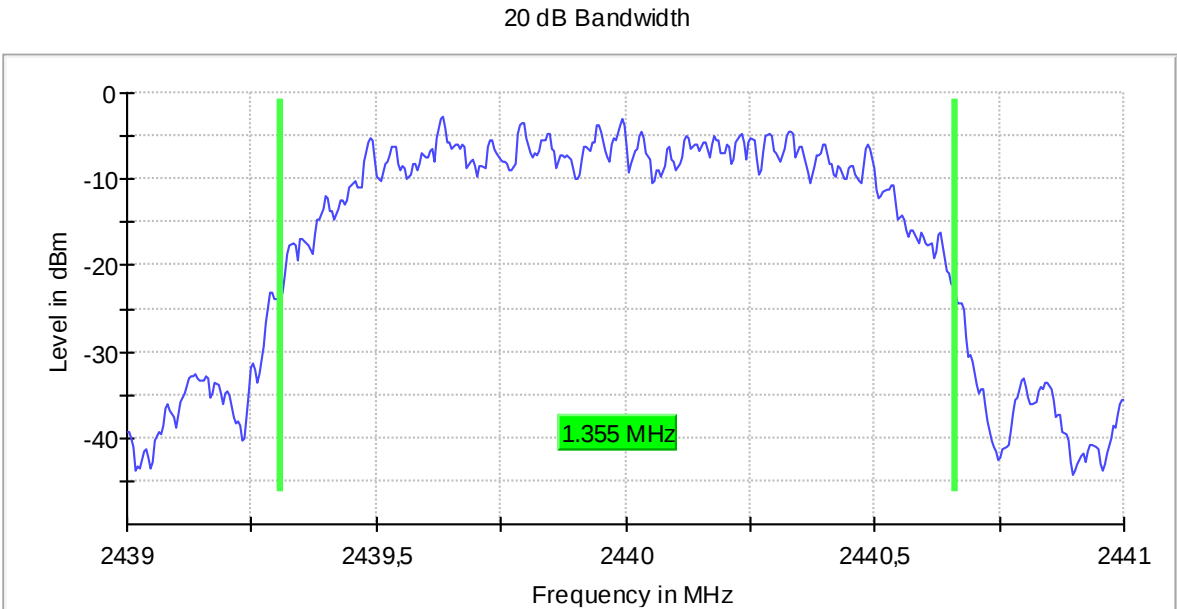

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

20 dB Bandwidth

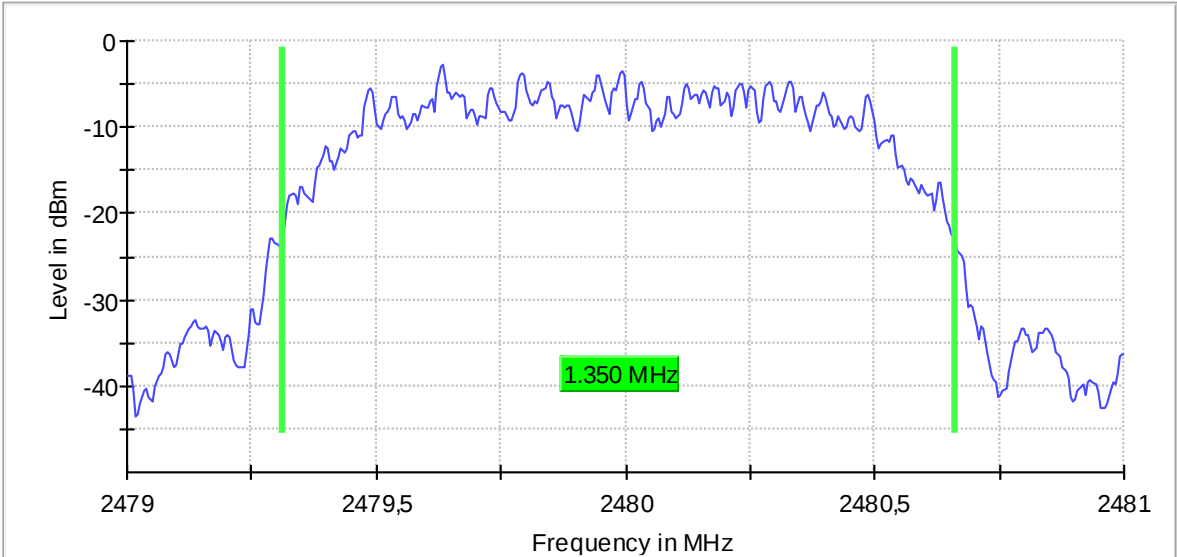

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Freq (MHz)	Port	Ebw (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	1.370000
		2440.00000		1.370000
		2480.00000		1.355000

Verdict


Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:


20 dB Bandwidth

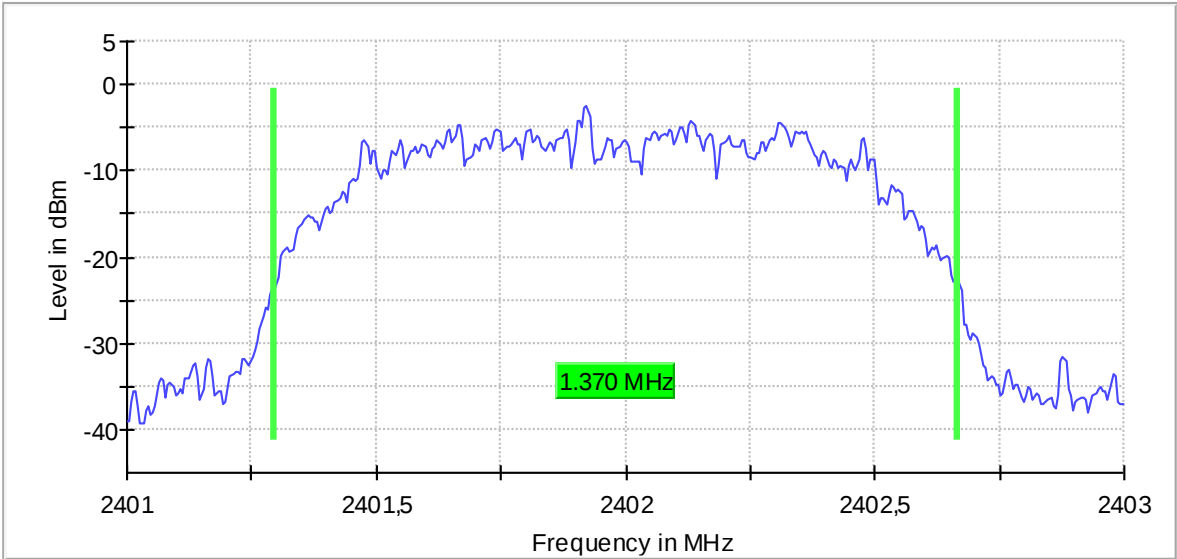

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2440.00000
MIMO Mode = SISO Active Port = 1

Images:



20 dB Bandwidth

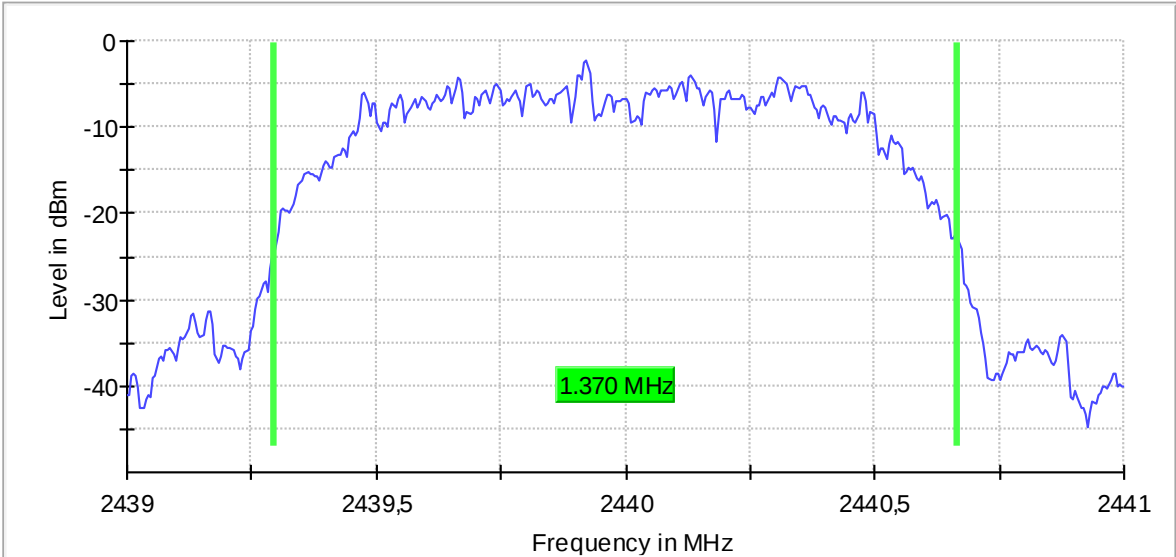

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

20 dB Bandwidth

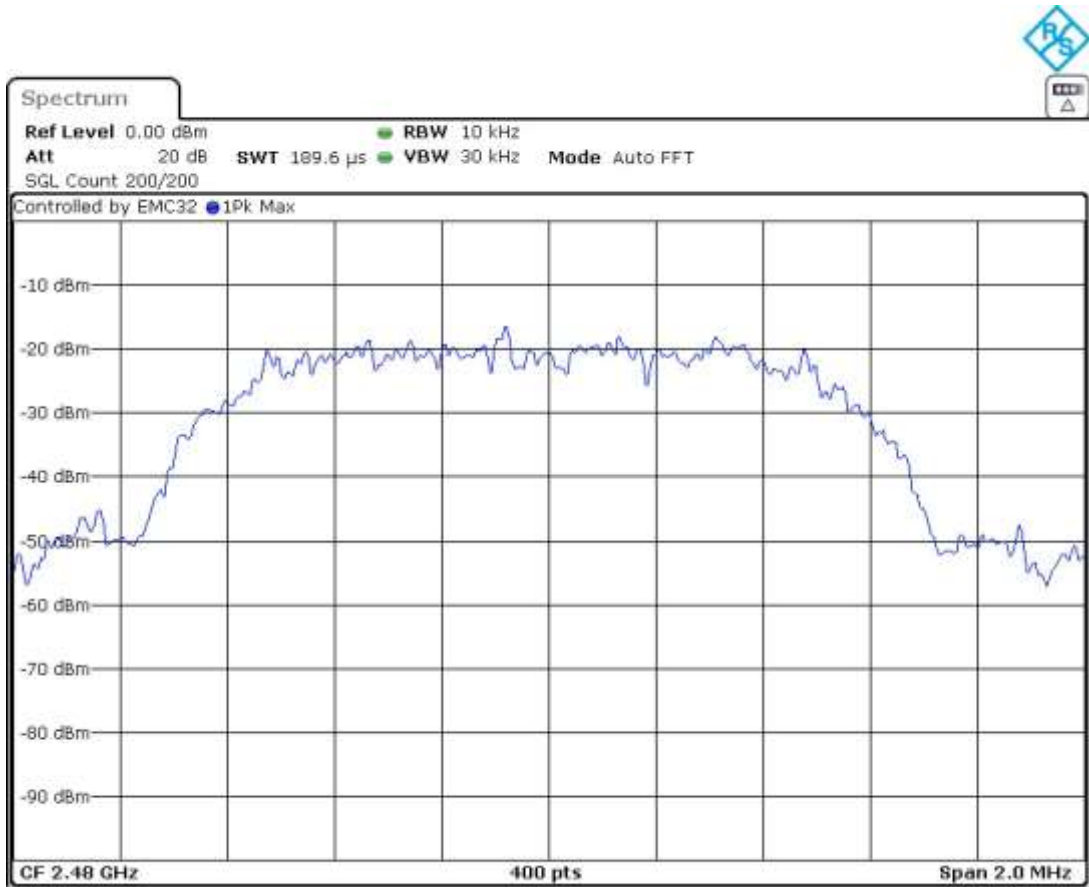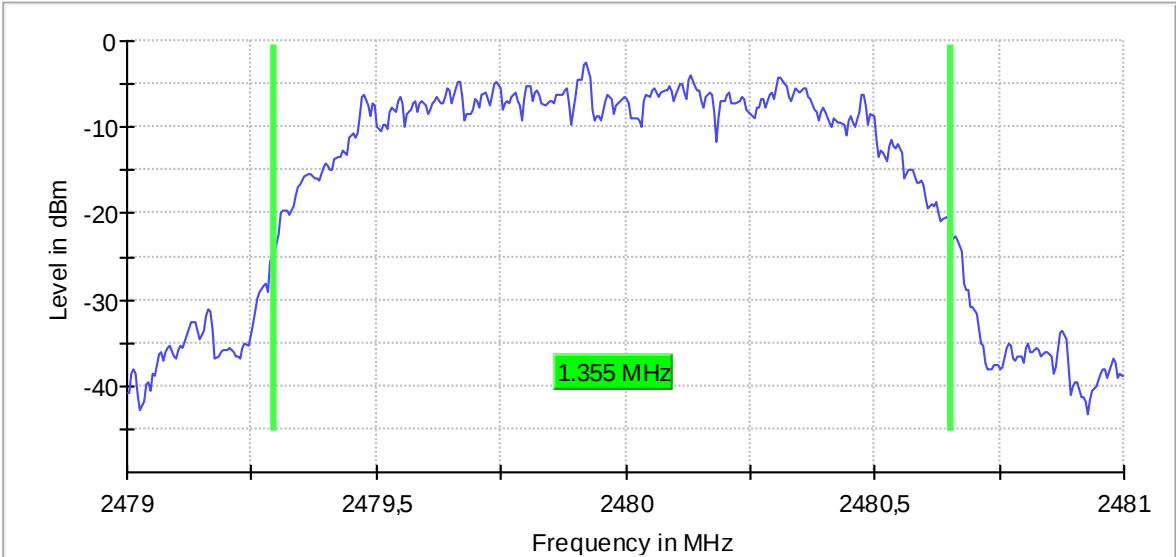

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) Time of Occupancy (Dwell Time)

Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = 0.4 x 79= 31.6 seconds.

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

The average time of occupancy was measured on low, middle and high channels and worst case (highest Avg COT) is reported.

Equipment	BW (MHz)	Port	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	269.350

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) MIMO Mode = SISO
Active Port = 1

Images:

Time of Channel Occupancy

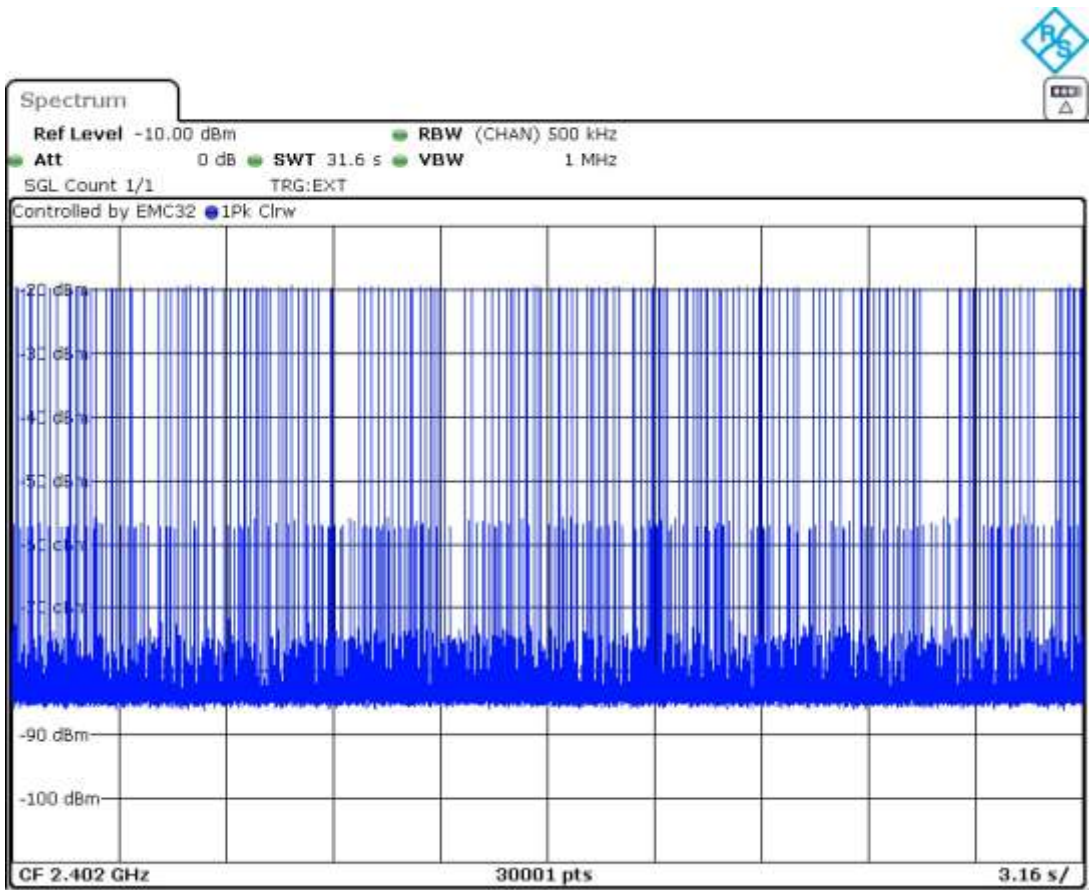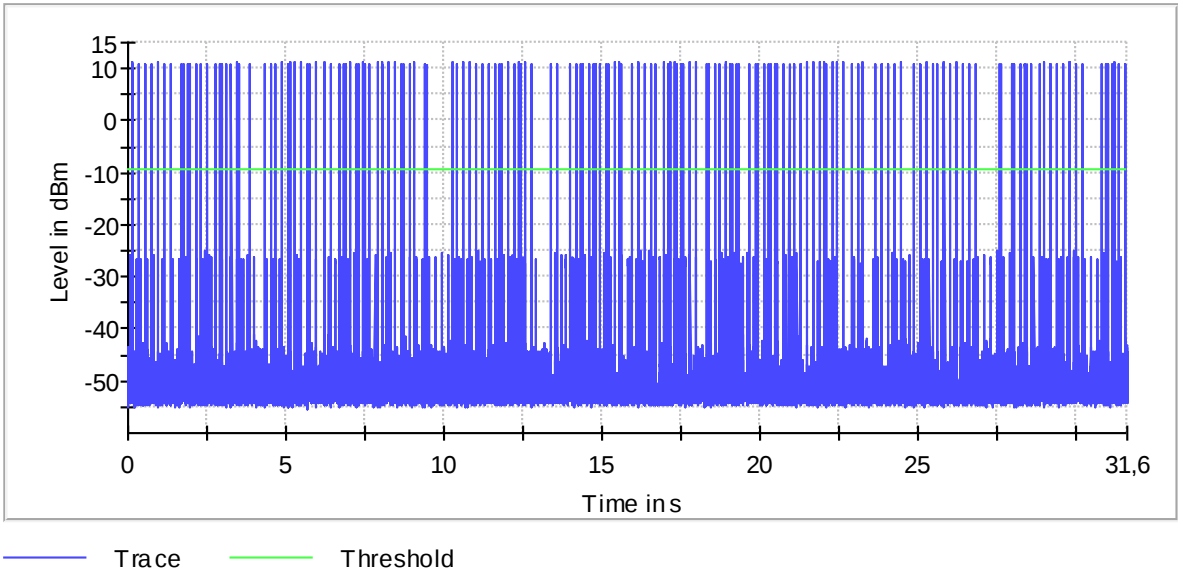

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

The average time of occupancy was measured on low, middle and high channels and worst case (highest Avg COT) is reported.

Equipment	BW (MHz)	Port	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	32.11


Verdict

Pass


Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
Active Port = 1

Images:

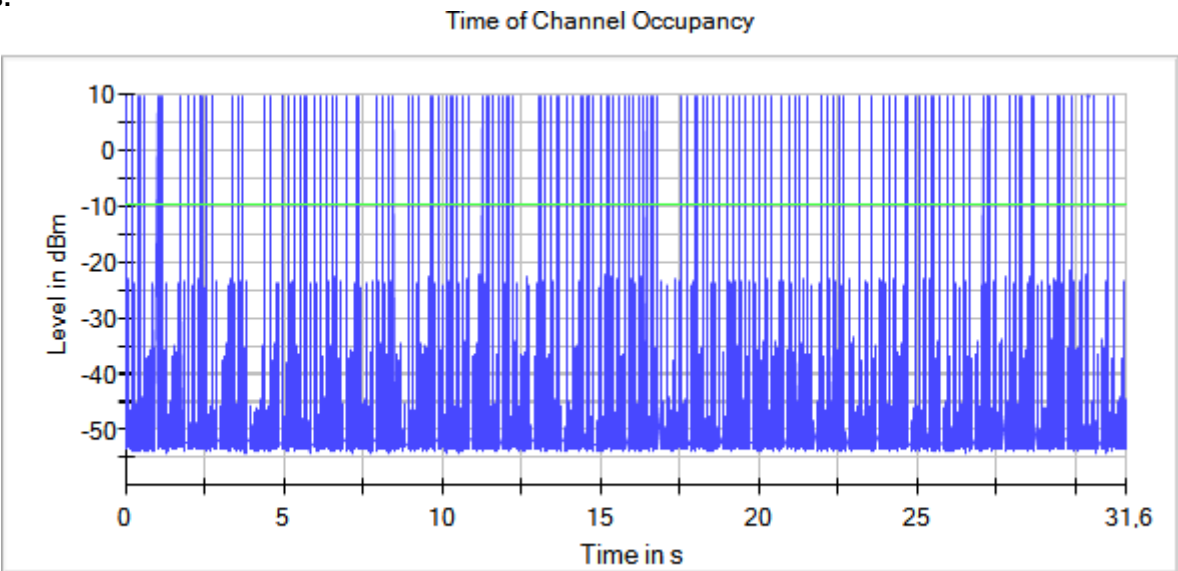

— Trace — Threshold

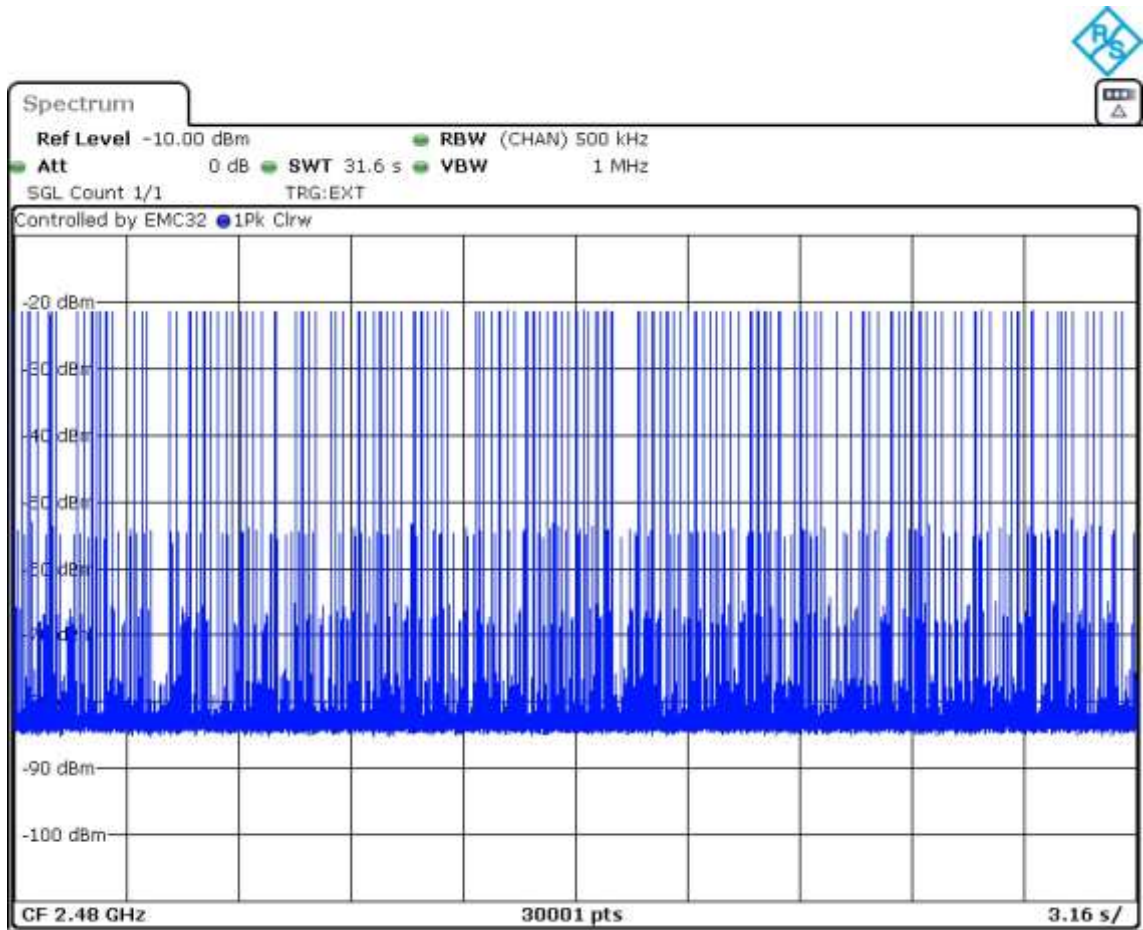

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	30.61



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
Active Port = 1

Images:

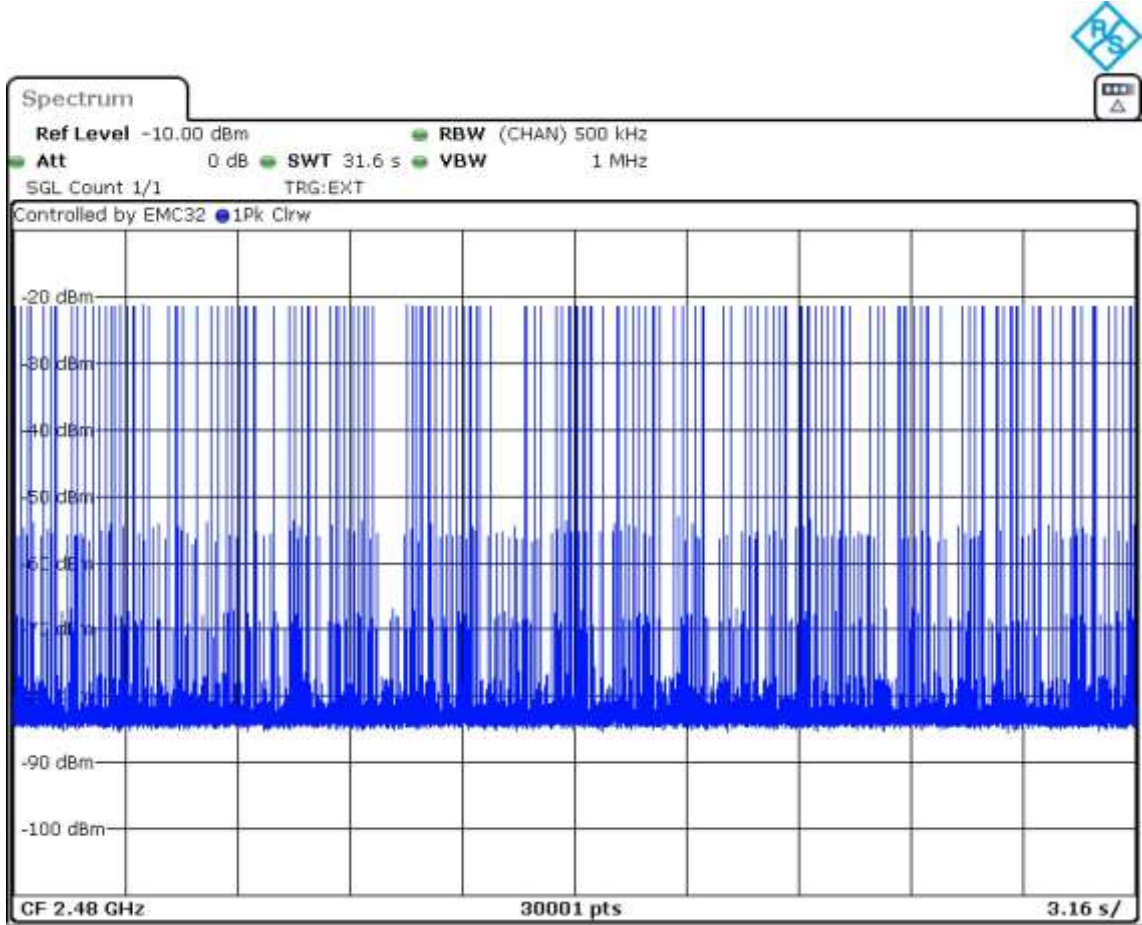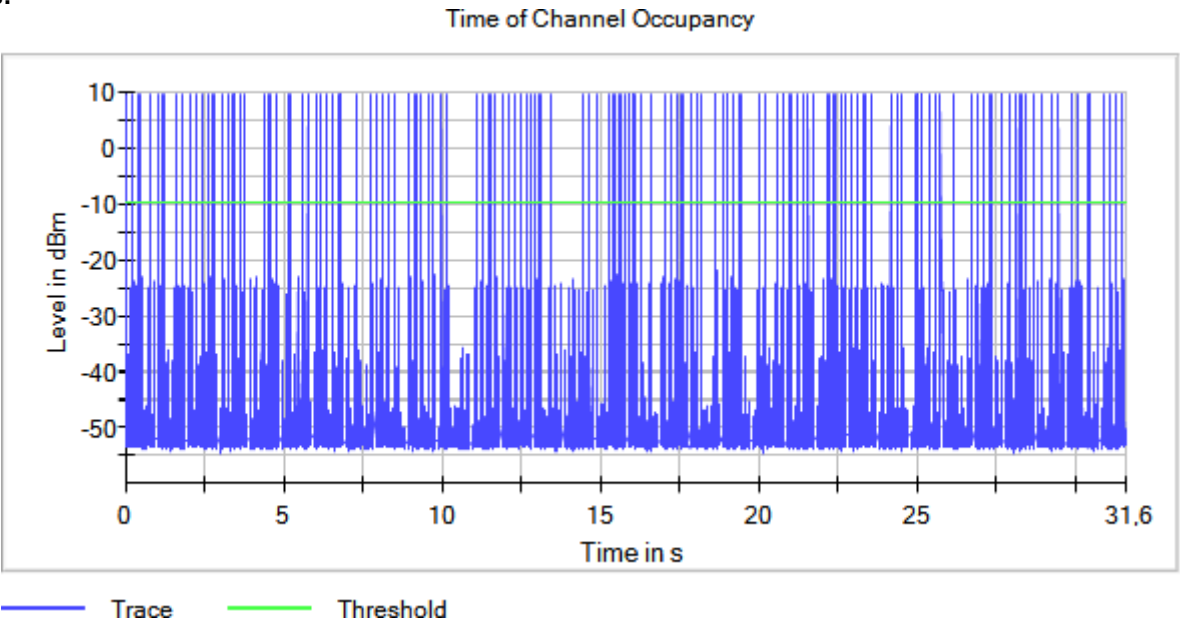

RSS-247 5.1 (b) / FCC 15.247 (a) (1) [CFS] Carrier Frequency Separation

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	1.009901

The hopping channel carrier frequencies are separated by a minimum of two-thirds of the 20 dB bandwidth of the hopping channel.

Verdict


Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) MIMO Mode = SISO
Active Port = 1

Images:

CFS

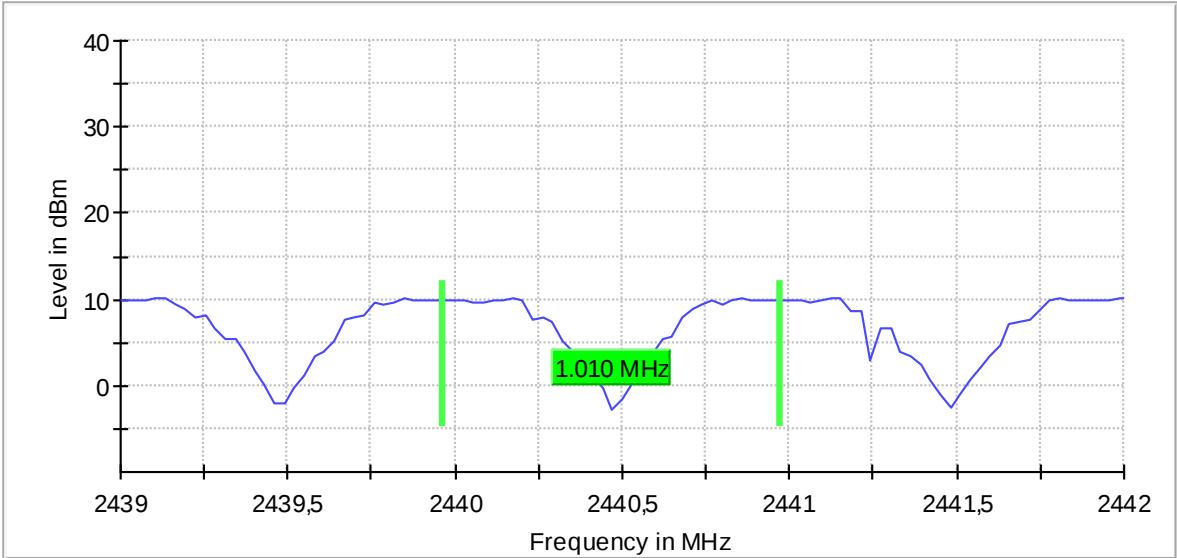

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	1.01



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
Active Port = 1

Images:

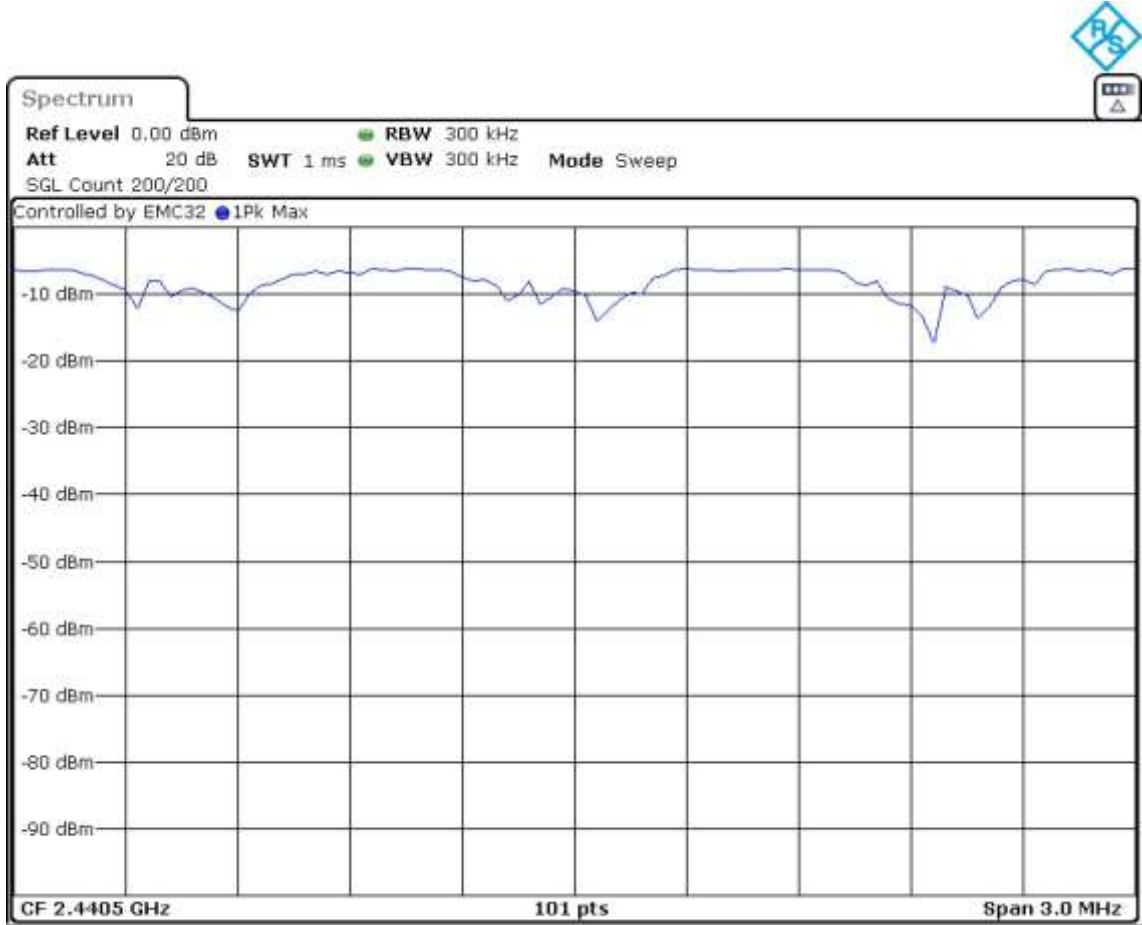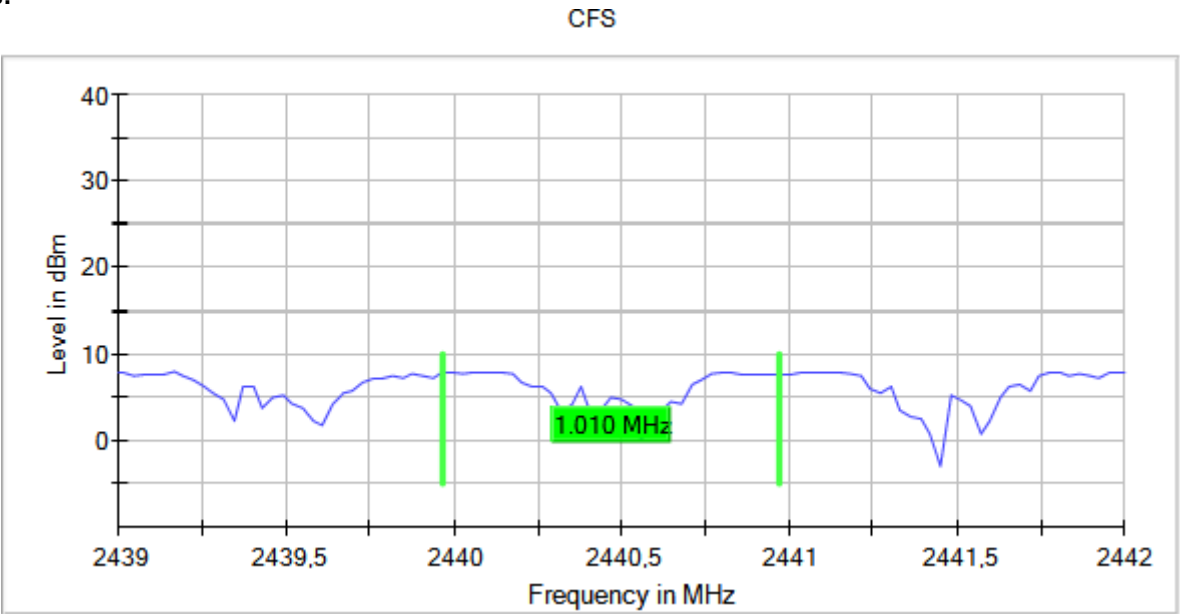

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1	1	0.98



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
Active Port = 1

Images:

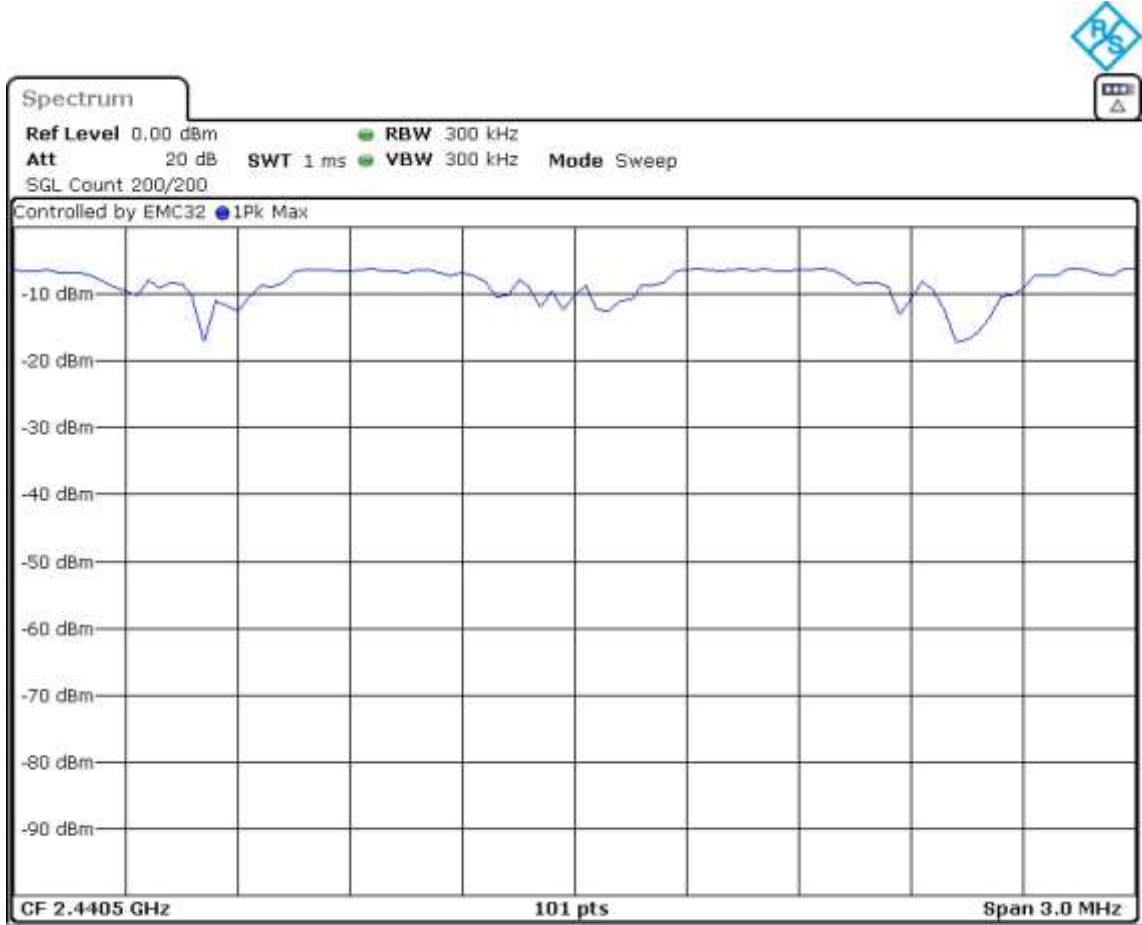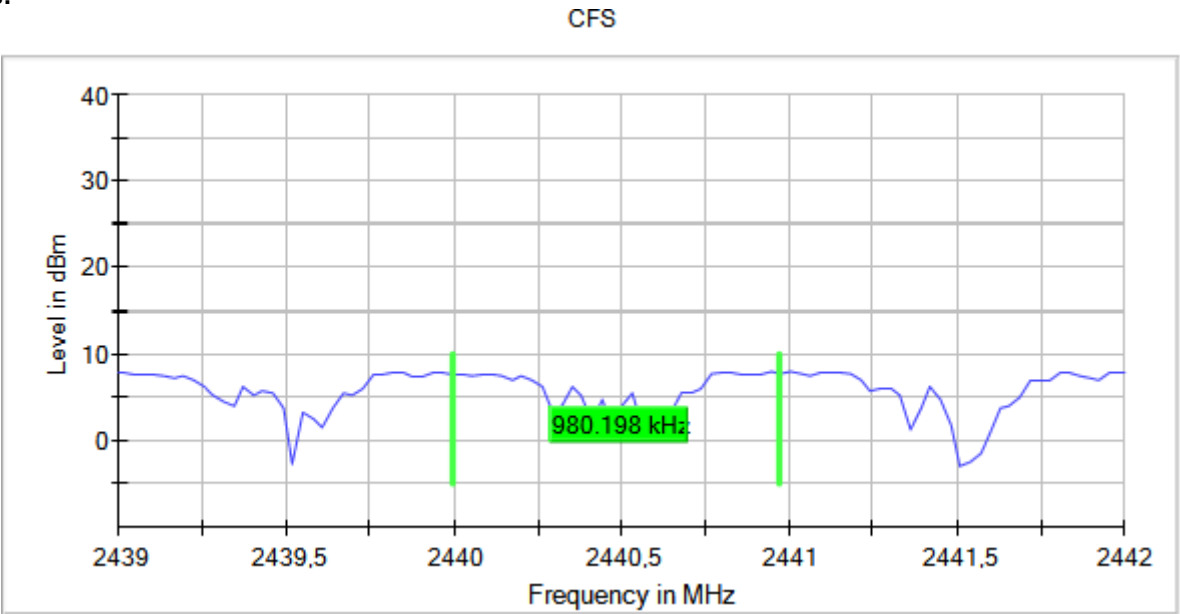

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels

Limits

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	79

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) MIMO Mode = SISO
Active Port = 1

Images:

Sequence

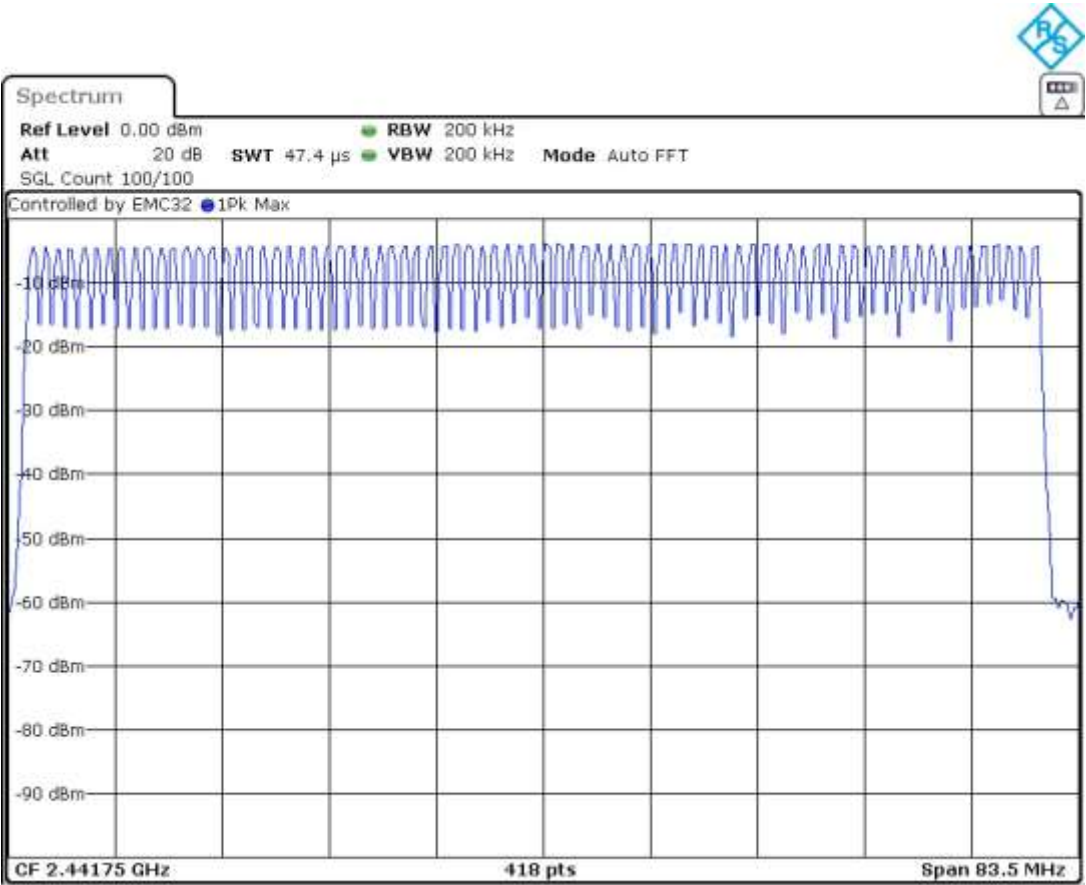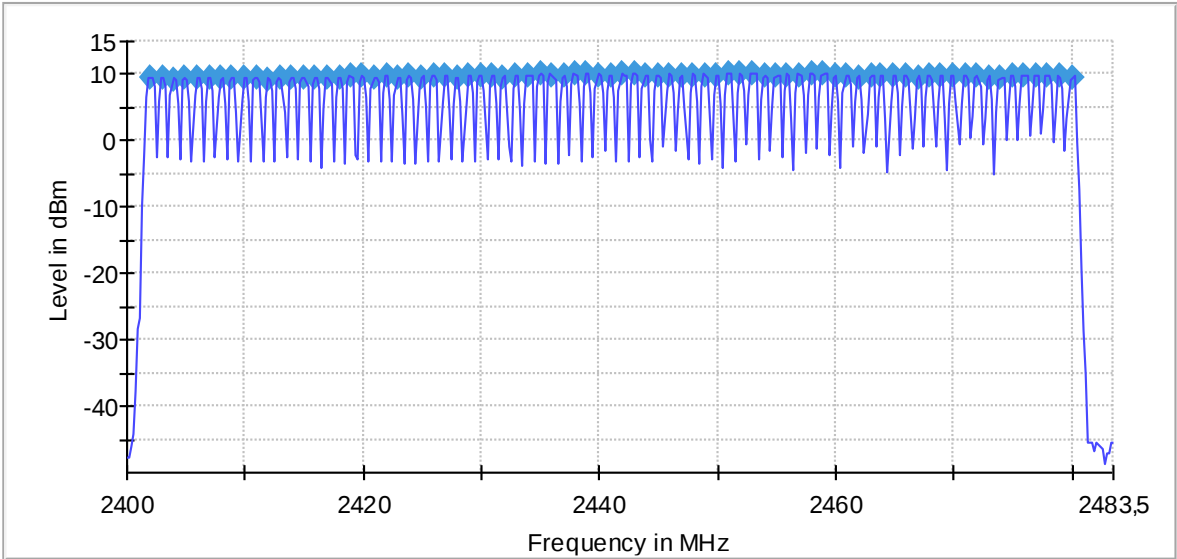

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	79

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) MIMO Mode = SISO
Active Port = 1

Images:

Sequence

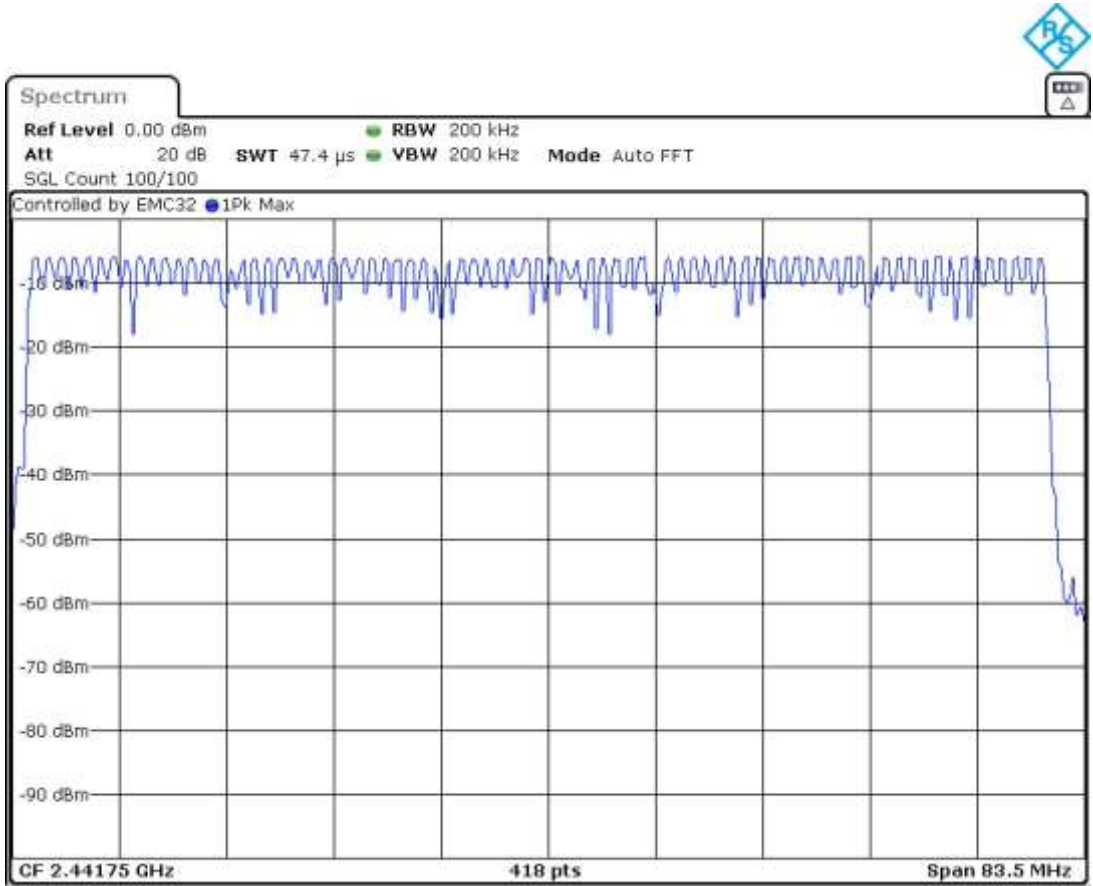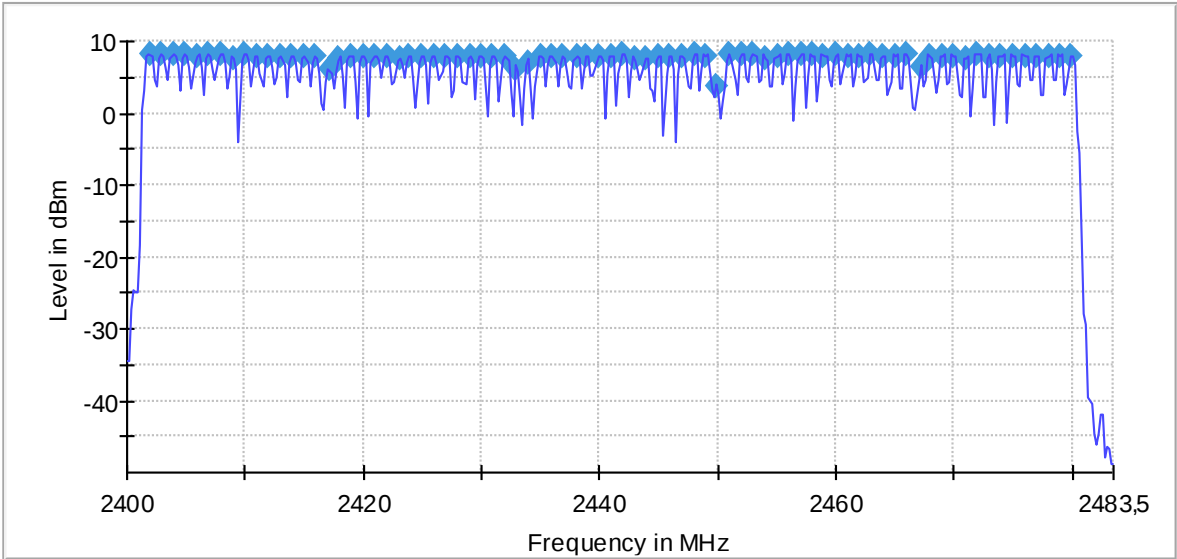

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

Equipment	BW (MHz)	Port	NHC
Frequency Hopping Spread Spectrum systems (DSS)	1	1	79

Verdict



Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) MIMO Mode = SISO
Active Port = 1

Images:

Sequence

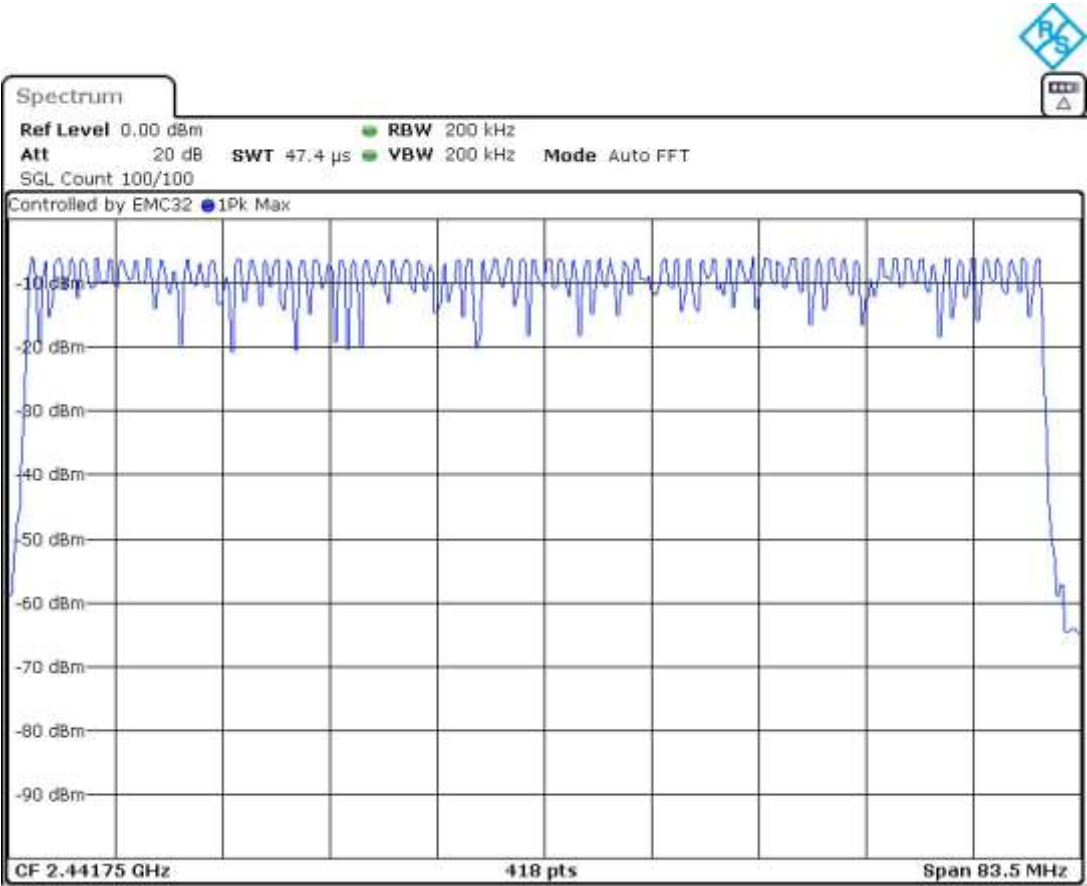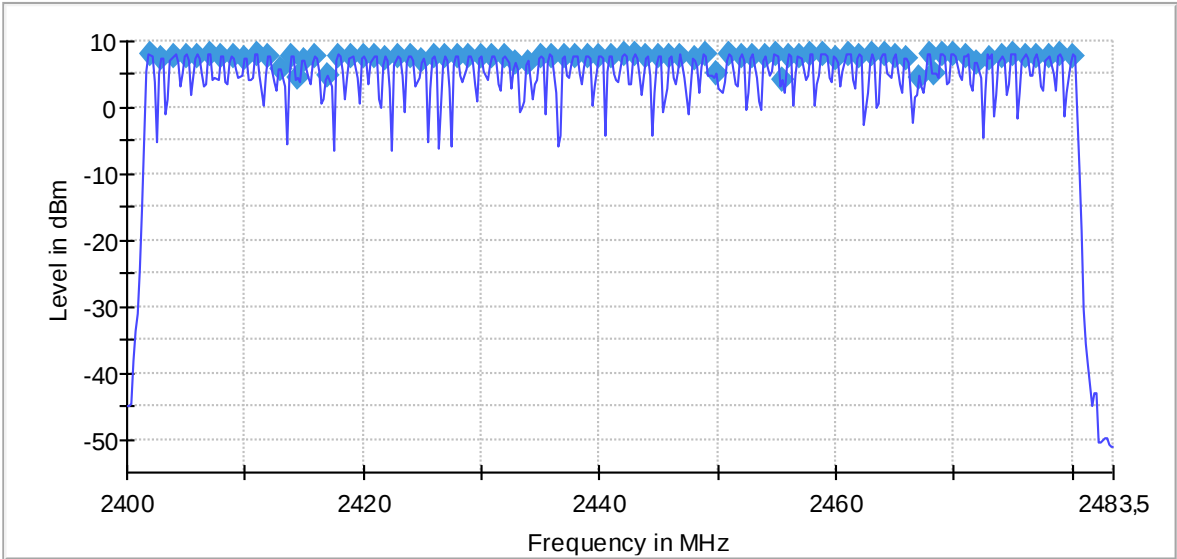

RSS-247 5.4 (b) / FCC 15.247 (b) (1) [Pkcp] Maximum Peak Conducted output power

Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm).

RSS-247:

The e.i.r.p. shall not exceed 4 W (RSS-247).

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 “Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices” of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: -1.54 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Equipment	BW (MHz)	Freq (MHz)	Port	Peak Power (dBm)	EIRP Power (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	9.576	8.036
Frequency Hopping Spread Spectrum systems (DSS)	1	2440.00000	1	10.089	8.549
Frequency Hopping Spread Spectrum systems (DSS)	1	2480.00000	1	9.919	8.379



Verdict

Pass

Attachments


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

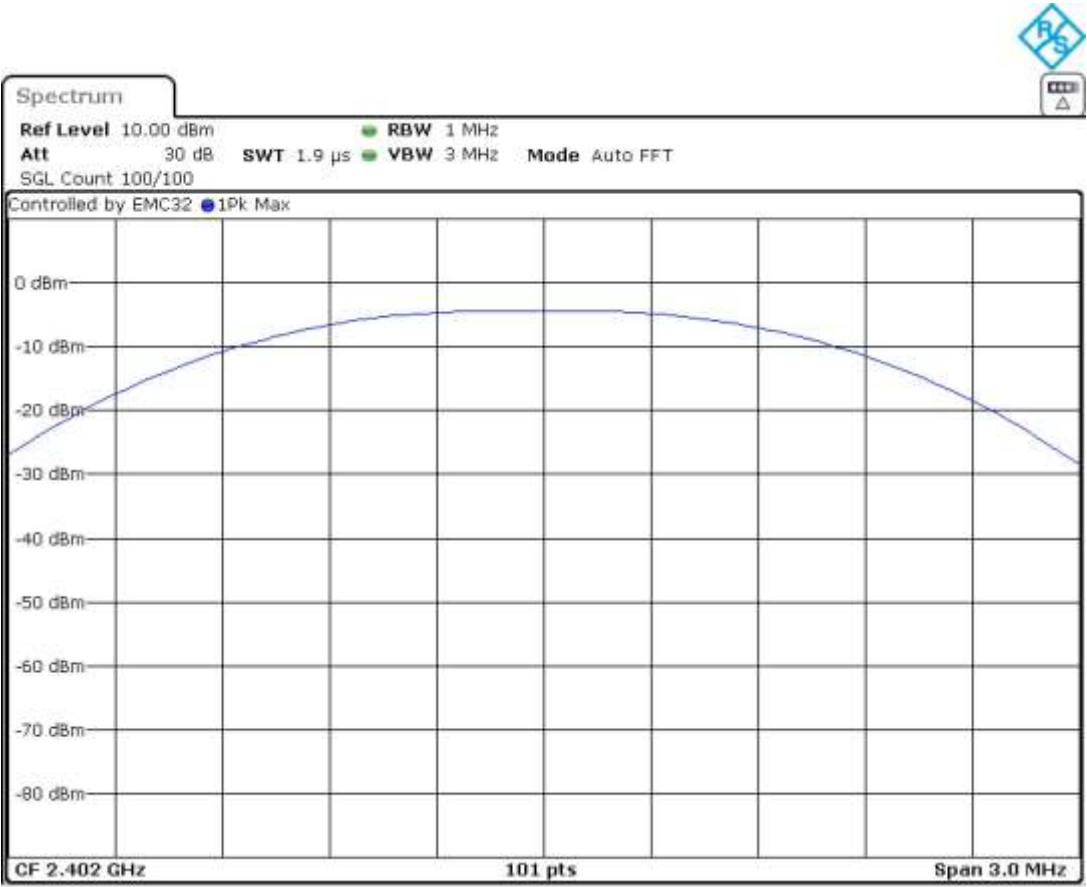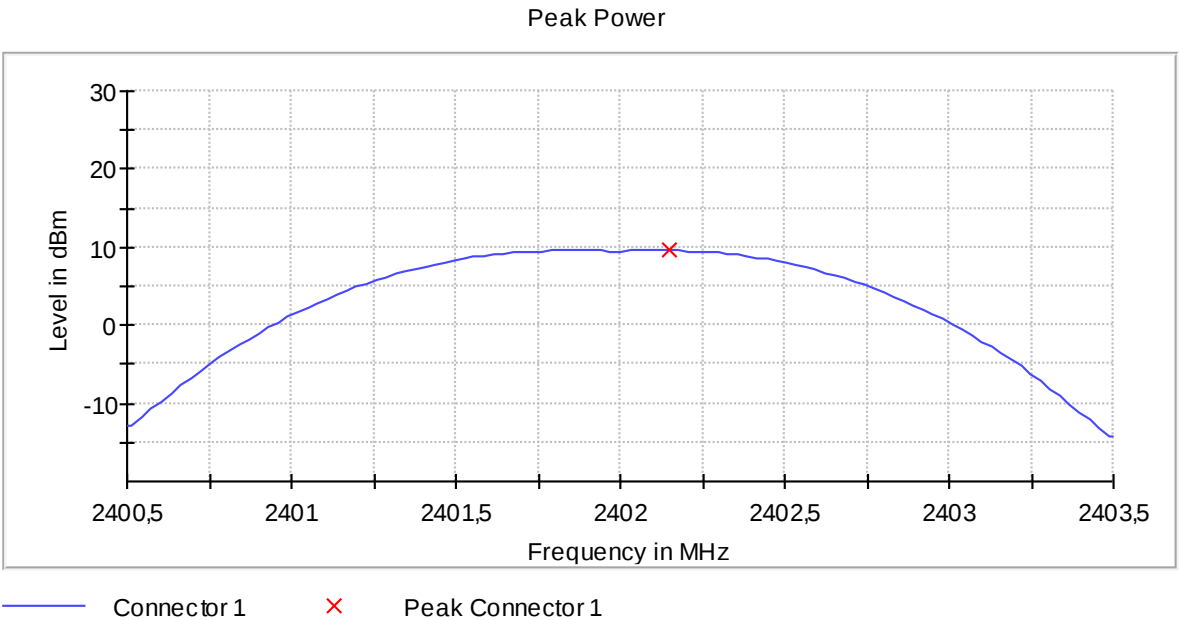



Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2440.00000
MIMO Mode = SISO Active Port = 1

Images:

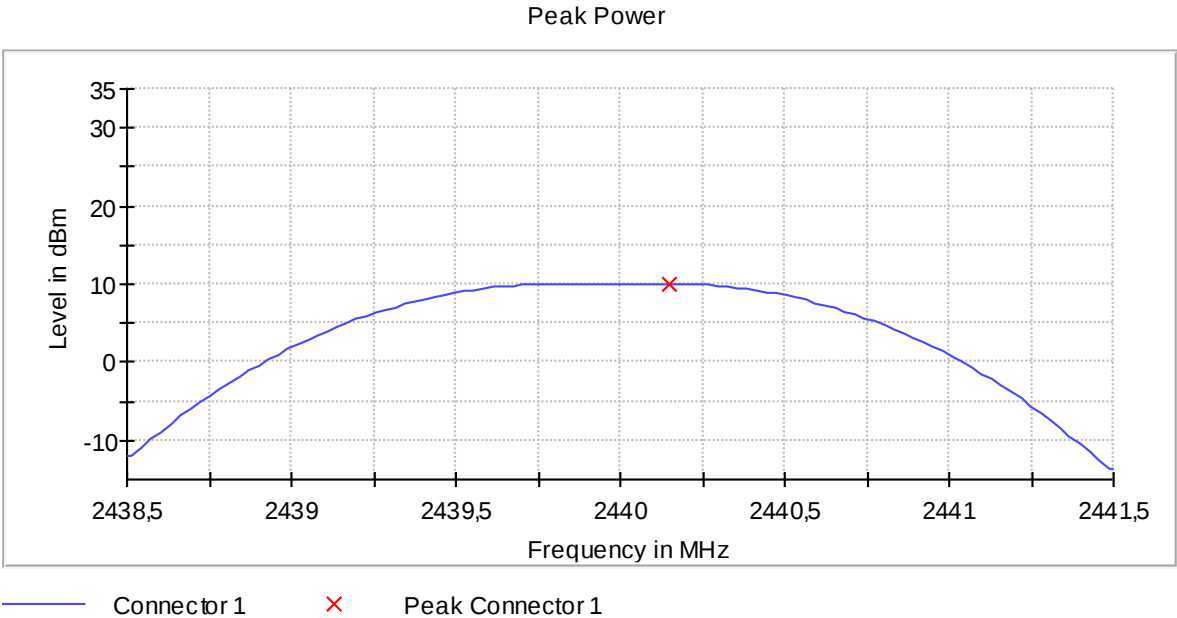

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

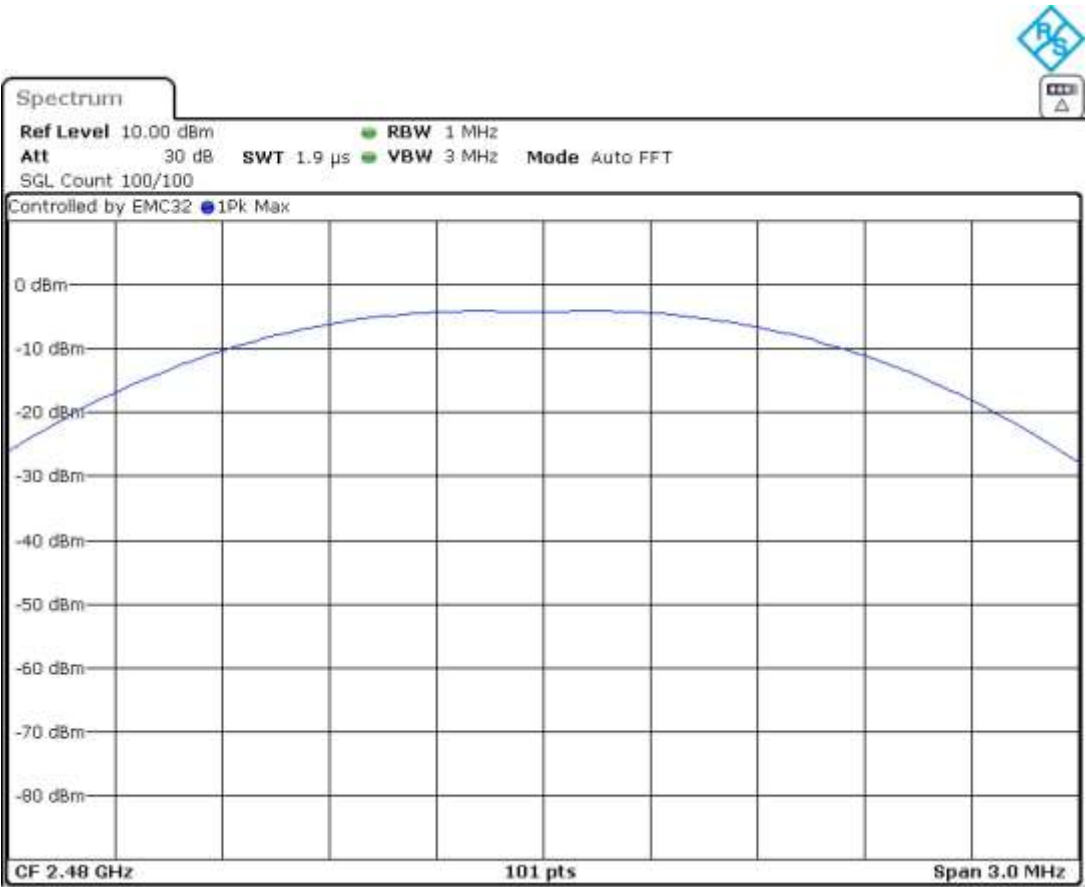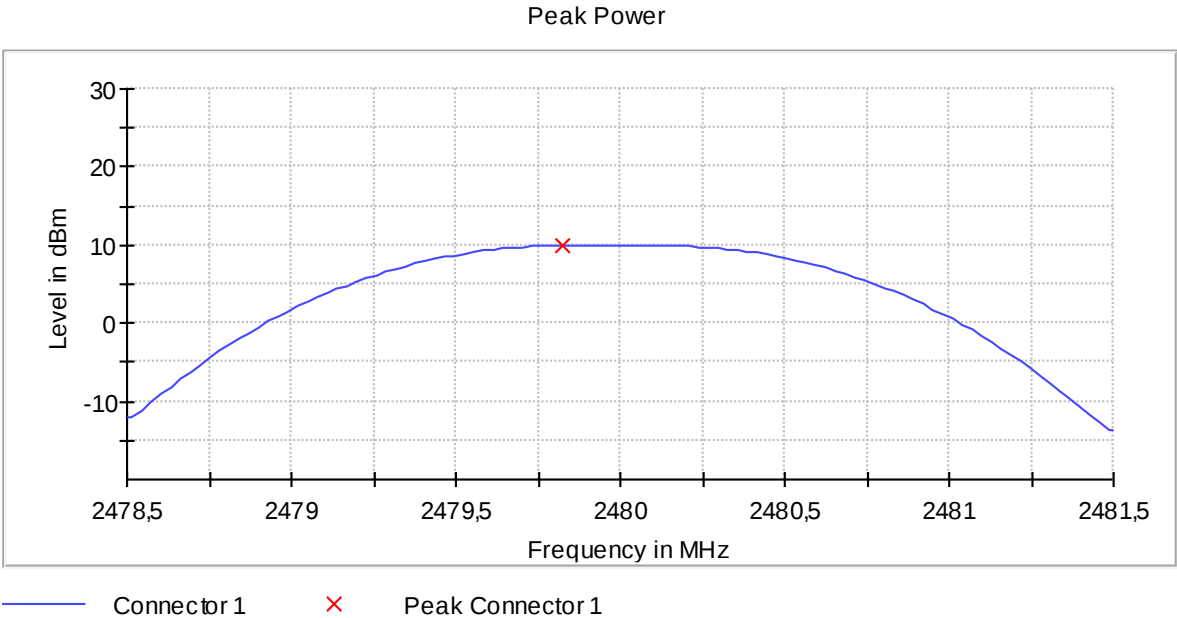

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 “Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices” of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: -1.54 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Equipment	BW (MHz)	Freq (MHz)	Port	Peak Power (dBm)	EIRP Power (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	9.592	8.052
Frequency Hopping Spread Spectrum systems (DSS)	1	2440.00000	1	10.116	8.576
Frequency Hopping Spread Spectrum systems (DSS)	1	2480.00000	1	9.944	8.404


Verdict

Pass

Attachments


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

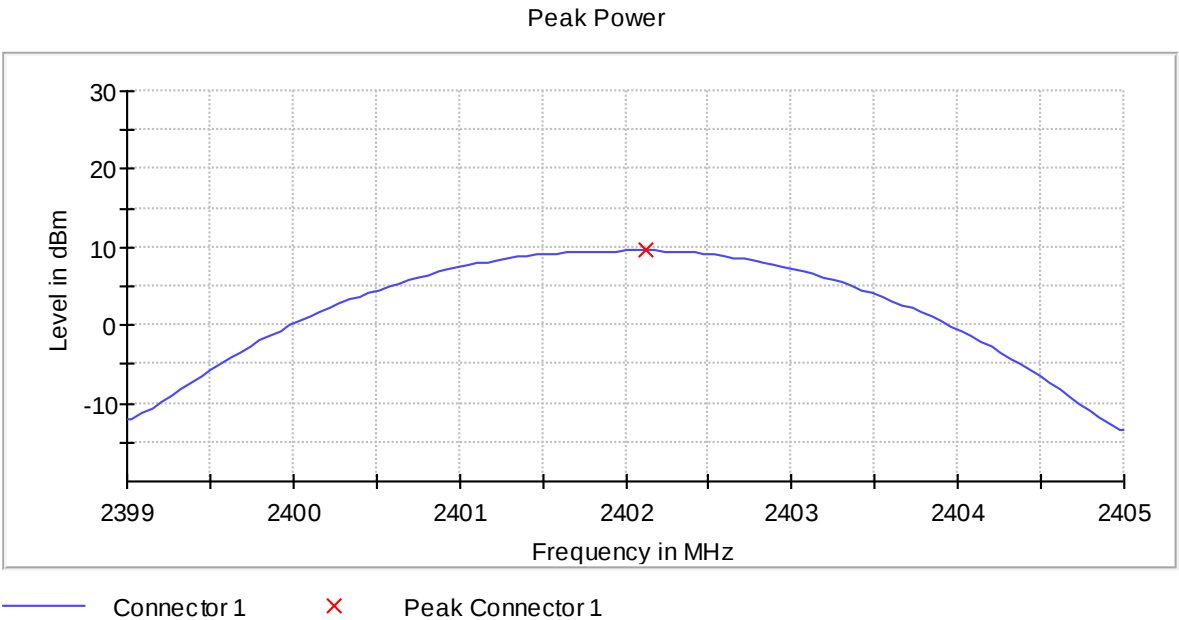


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2440.00000
MIMO Mode = SISO Active Port = 1

Images:

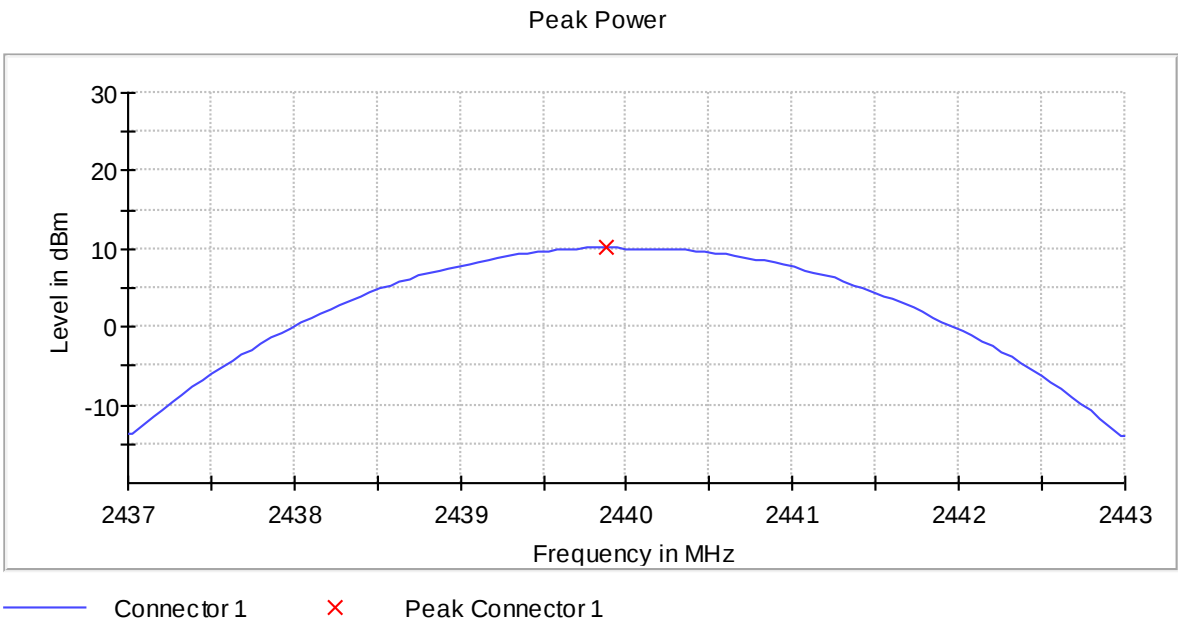

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

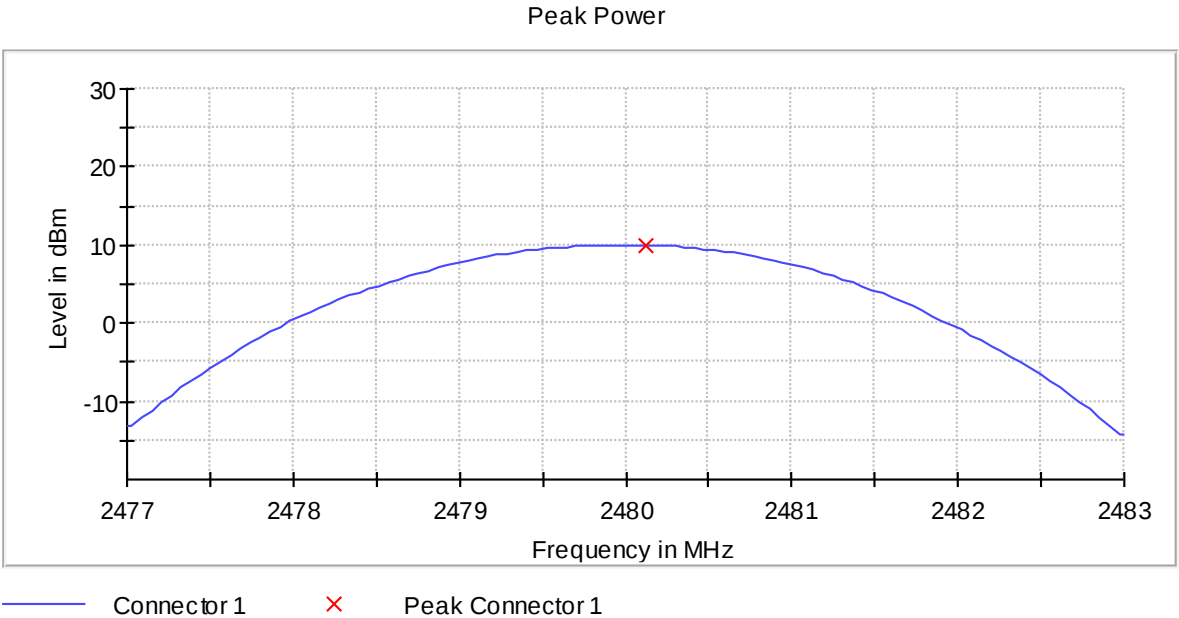

Modulation: BT (8DPSK 3-DH5)

MIMO Mode: SISO

Results

The maximum peak conducted output power level of the fundamental emission was measured according to clause 7.8.5 “Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices” of ANSI C63.10-2013.

The EIRP power (dBm) is calculated by adding the maximum declared antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: -1.54 dBi

The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Equipment	BW (MHz)	Freq (MHz)	Port	Peak Power (dBm)	EIRP Power (dBm)
Frequency Hopping Spread Spectrum systems (DSS)	1	2402.00000	1	10.071	8.531
Frequency Hopping Spread Spectrum systems (DSS)	1	2440.00000	1	10.614	9.074
Frequency Hopping Spread Spectrum systems (DSS)	1	2480.00000	1	10.438	8.898


Verdict

Pass

Attachments


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2402.00000
MIMO Mode = SISO Active Port = 1

Images:

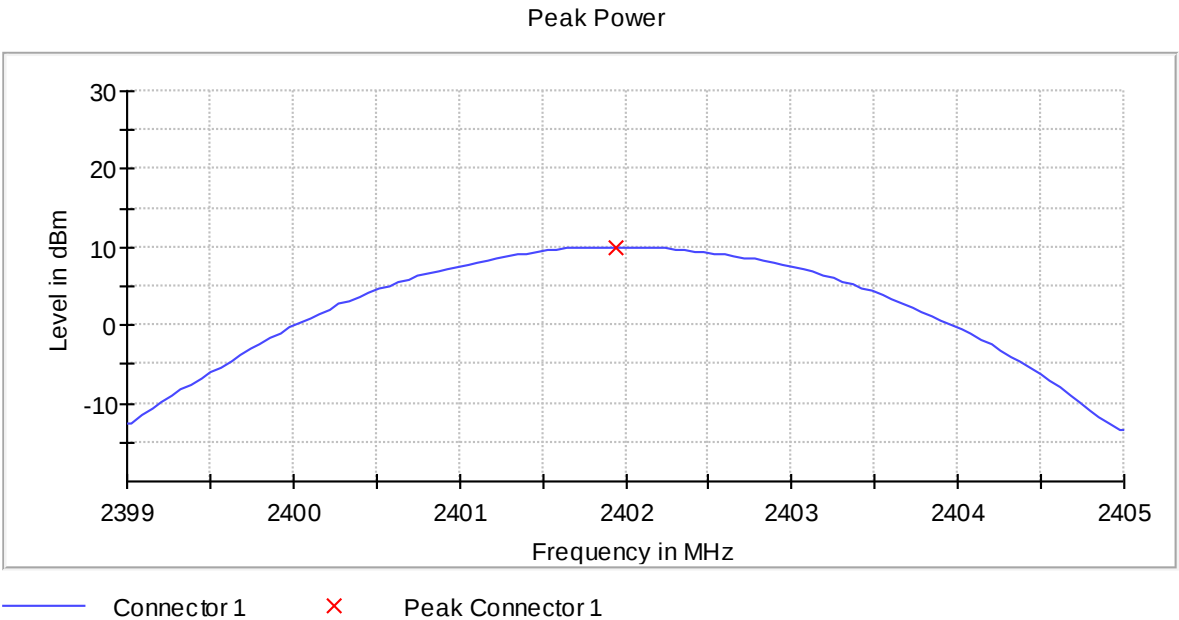


Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2440.00000
MIMO Mode = SISO Active Port = 1

Images:

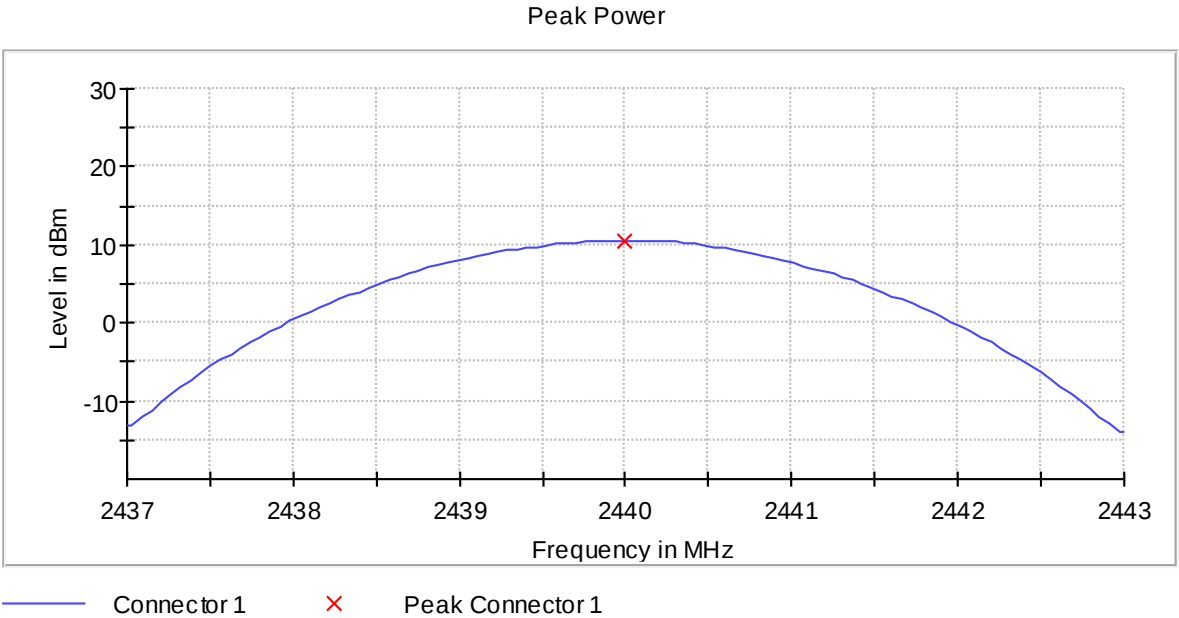

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 2480.00000
MIMO Mode = SISO Active Port = 1

Images:

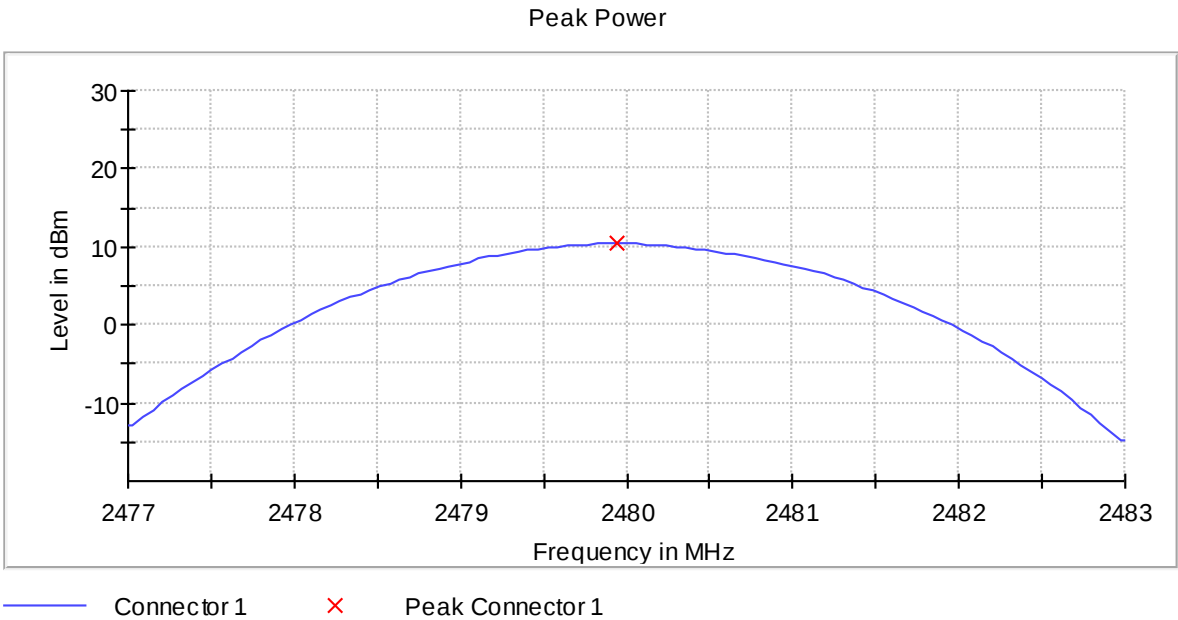

RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)

Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Modulation: BT (GFSK 1-DH5)

MIMO Mode: SISO

Result

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.


Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (GFSK 1-DH5) Frequency MHz = 0.00000
MIMO Mode = SISO Active Port = 1

Images:

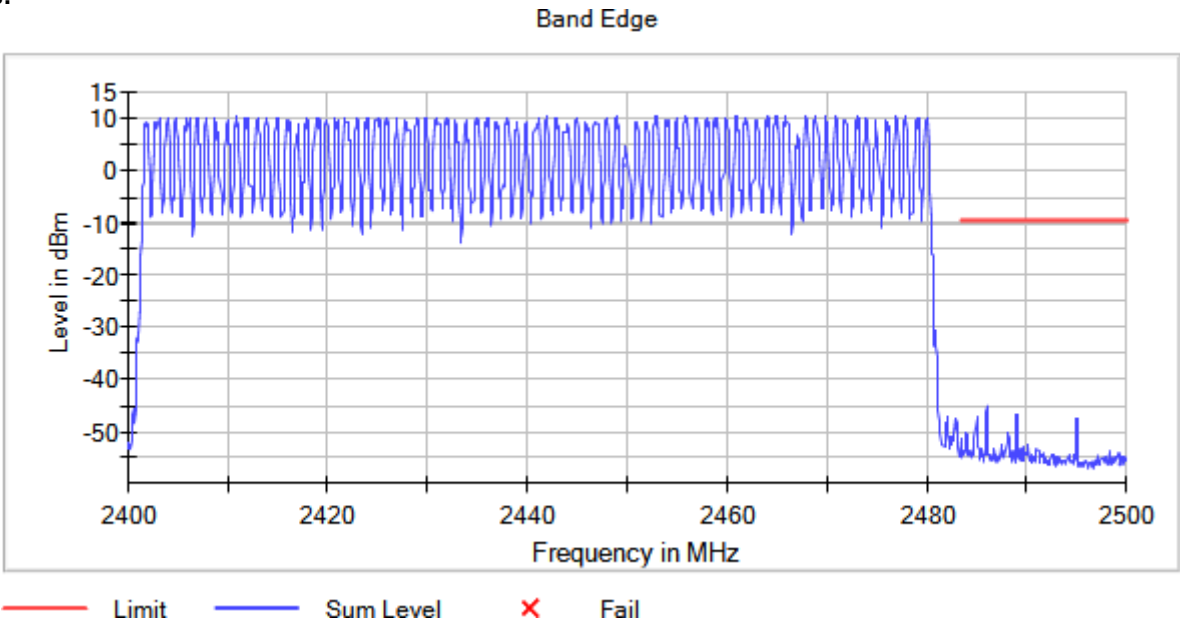

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	141 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (GFSK 1-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 0.00000

Active Port = 1

Images:

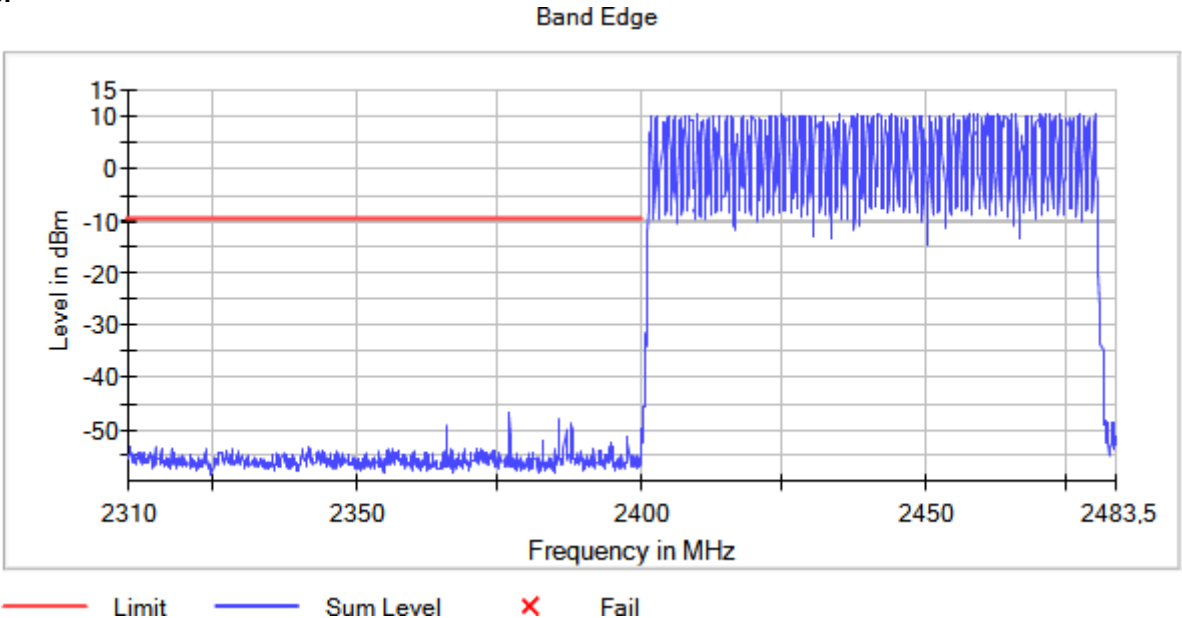

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	141 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (GFSK 1-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2402.00000

Active Port = 1

Images:

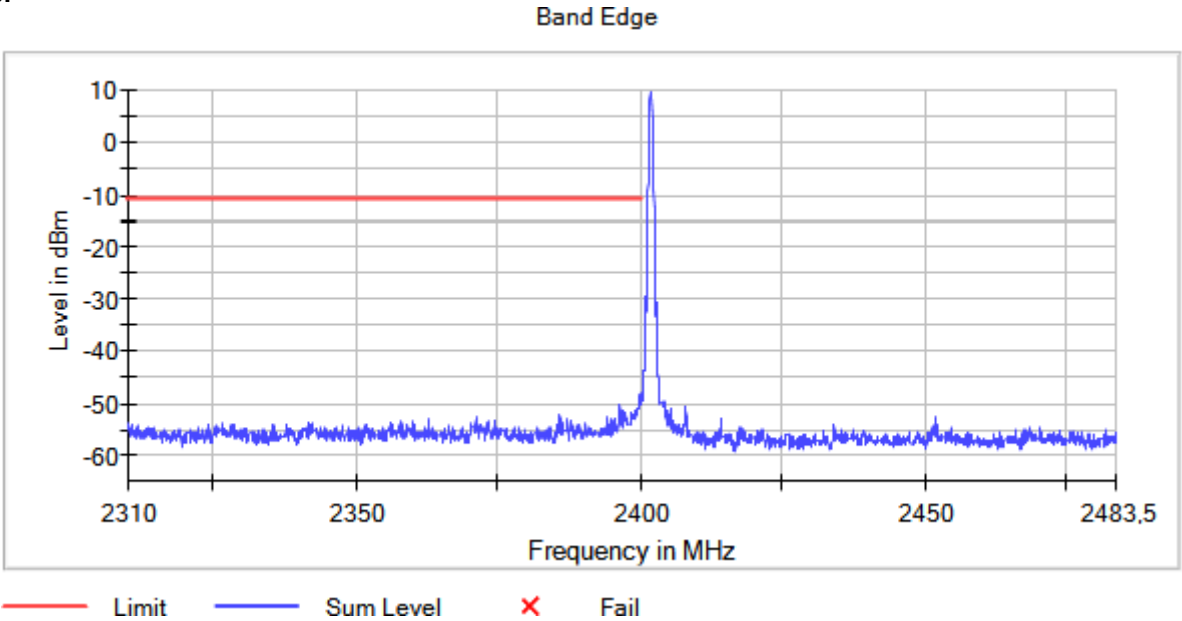

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	141 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (GFSK 1-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

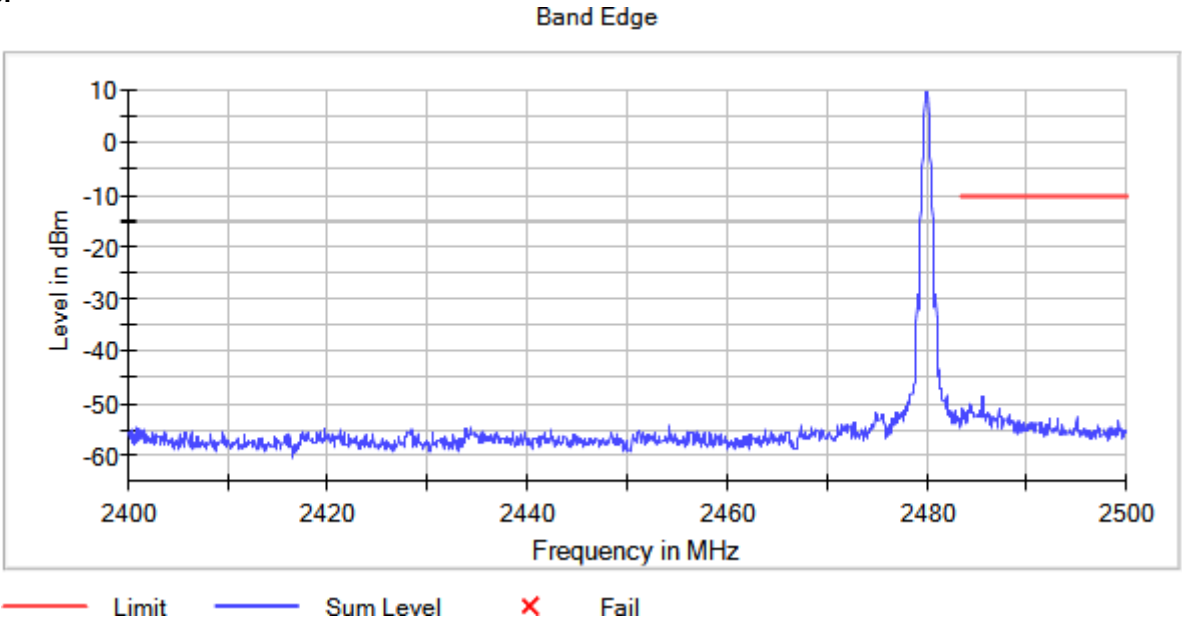

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	141 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Modulation: BT (Pi/4 DQPSK 2-DH5)

MIMO Mode: SISO

Result

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.


Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (Pi/4 DQPSK 2-DH5) Frequency MHz = 0.00000
MIMO Mode = SISO Active Port = 1

Images:

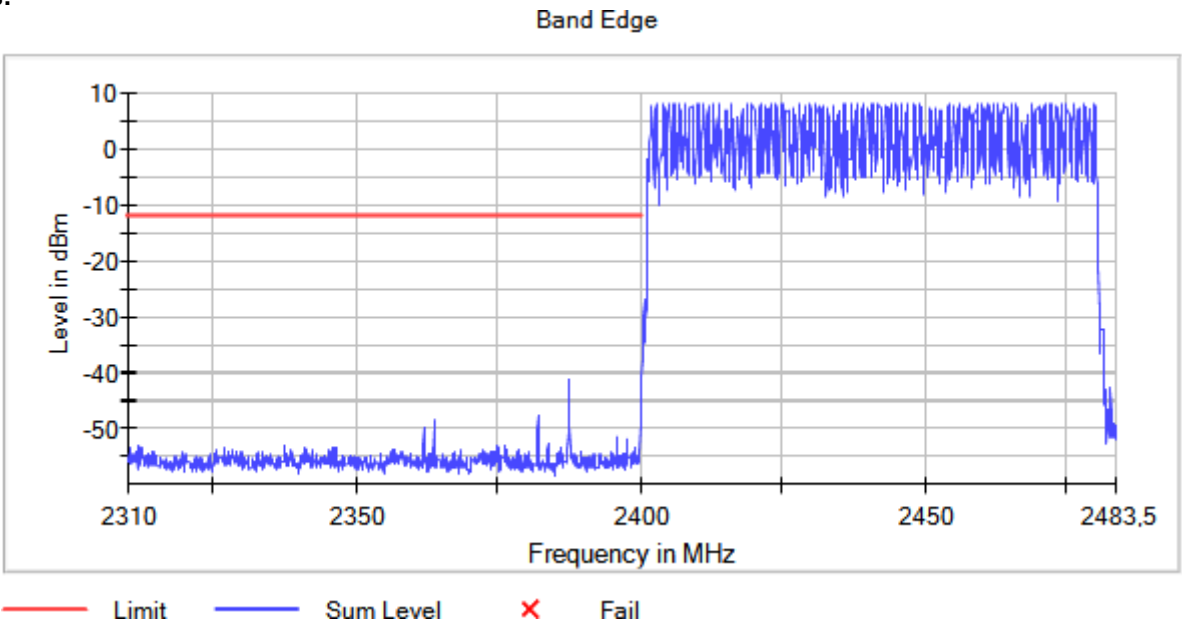

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO

Setting	Instrument Value	Target Value
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	146 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 0.00000

Active Port = 1

Images:

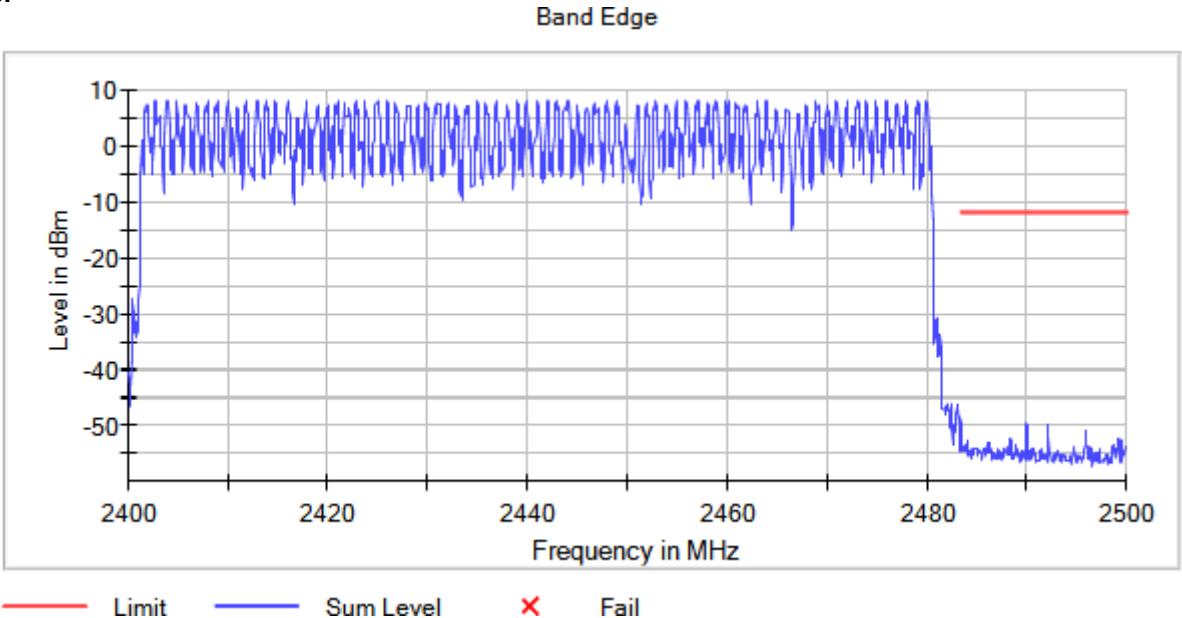

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	146 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2402.00000

Active Port = 1

Images:

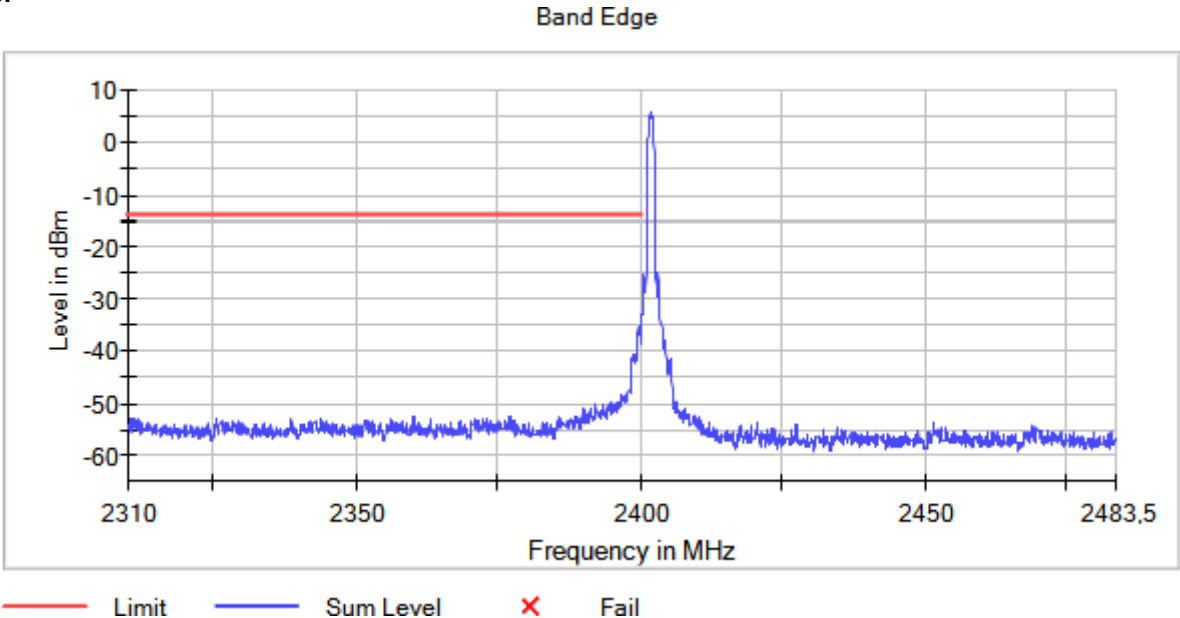

Tables:
Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	146 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (Pi/4 DQPSK 2-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

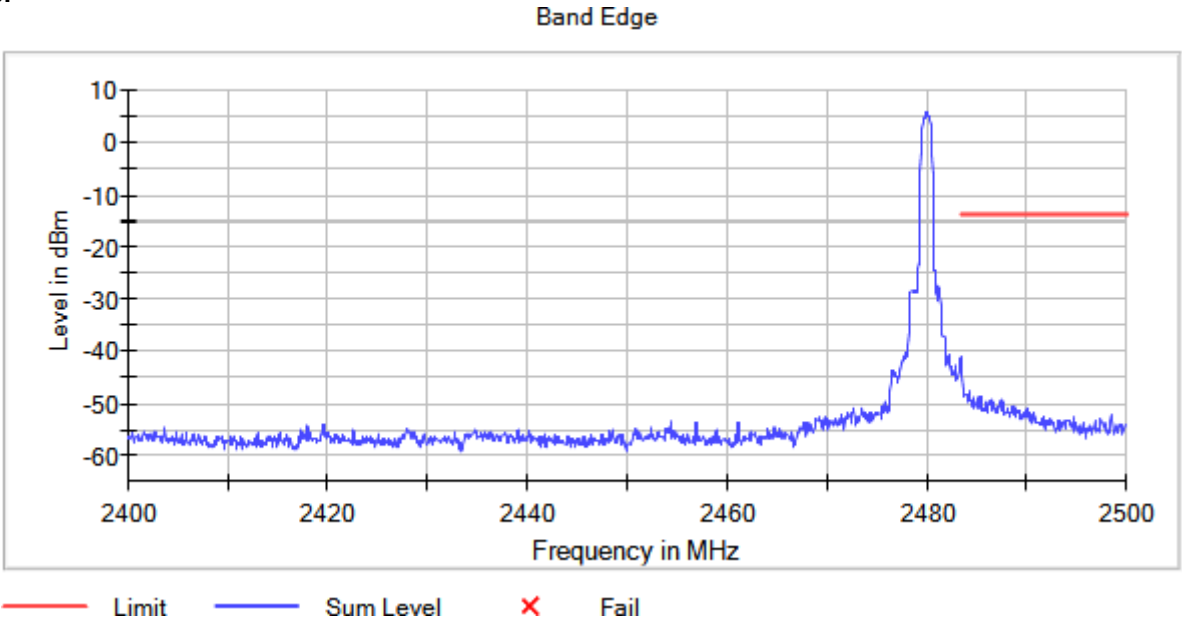

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	146 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Modulation: BT (8DPSK 3-DH5)
MIMO Mode: SISO

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.


Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS) Bandwidth MHz = 1
Modulation = BT (8DPSK 3-DH5) Frequency MHz = 0.00000
MIMO Mode = SISO Active Port = 1

Images:

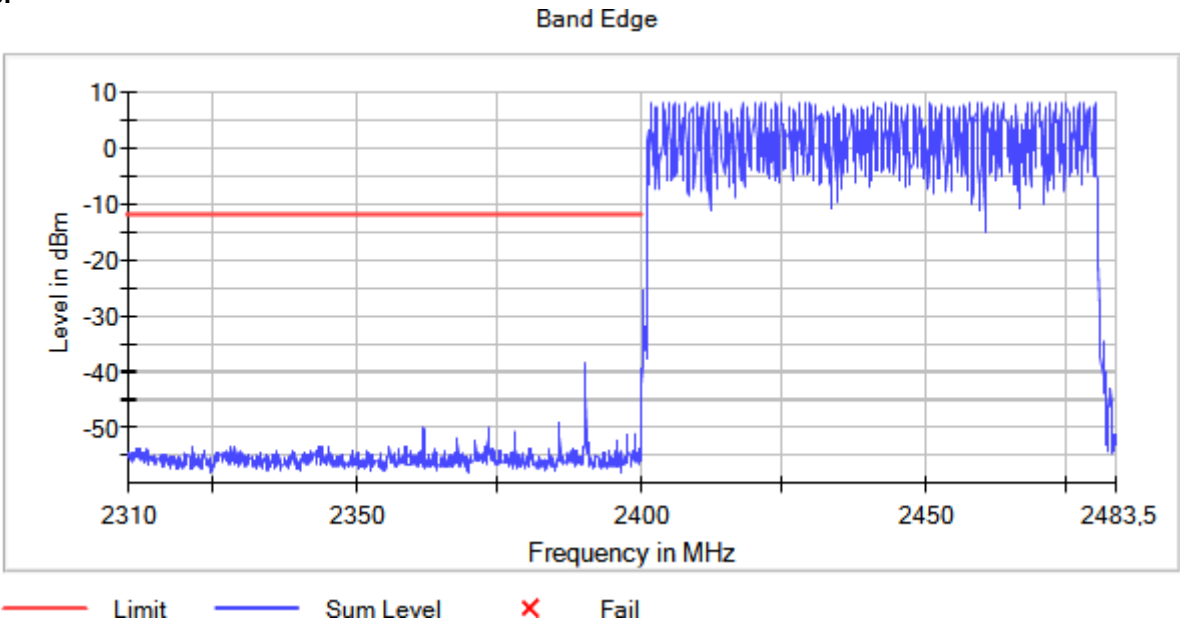

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm

Setting	Instrument Value	Target Value
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	148 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK 3-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 0.00000

Active Port = 1

Images:

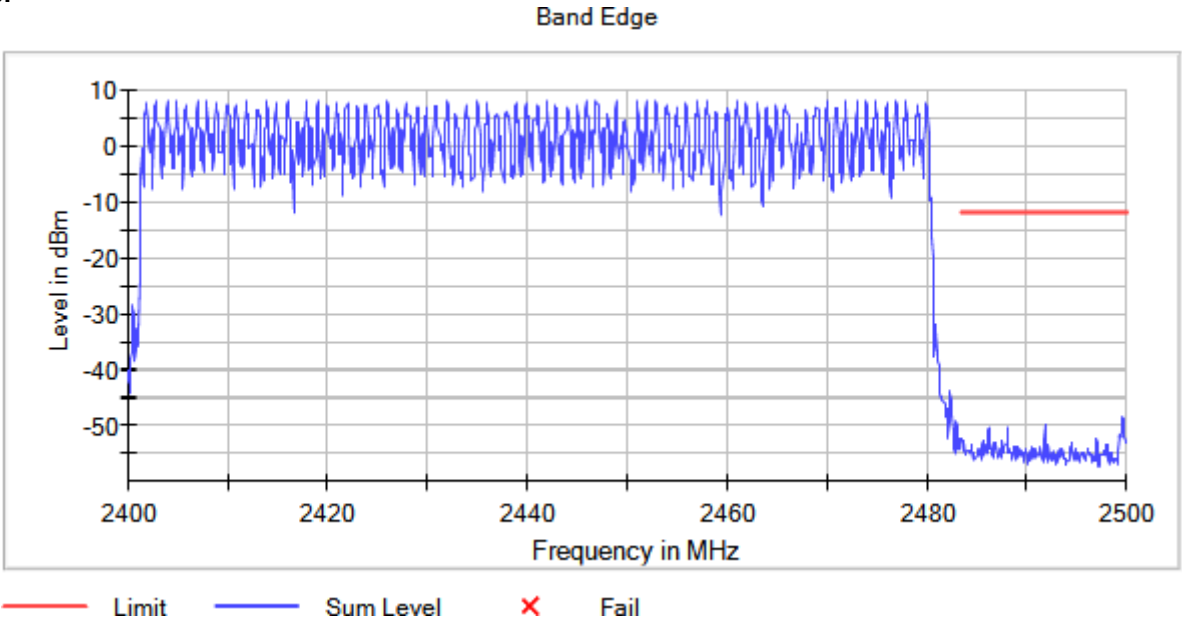

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	148 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK 3-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2402.00000

Active Port = 1

Images:

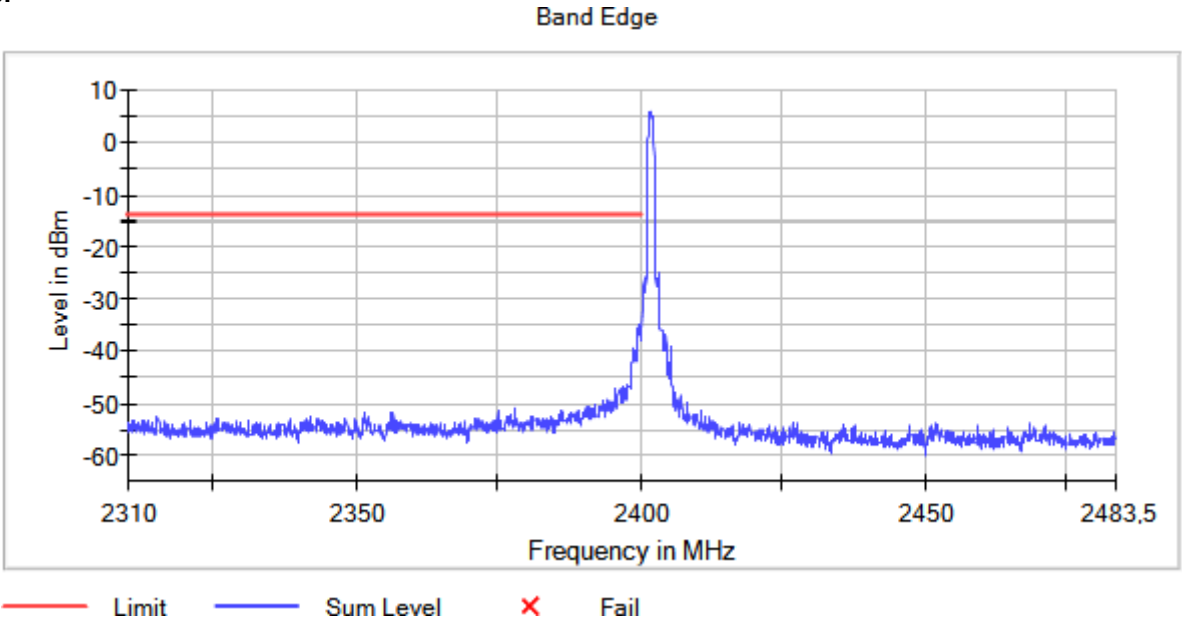

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	148 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS)

Modulation = BT (8DPSK 3-DH5)


MIMO Mode = SISO

Bandwidth MHz = 1

Frequency MHz = 2480.00000

Active Port = 1

Images:

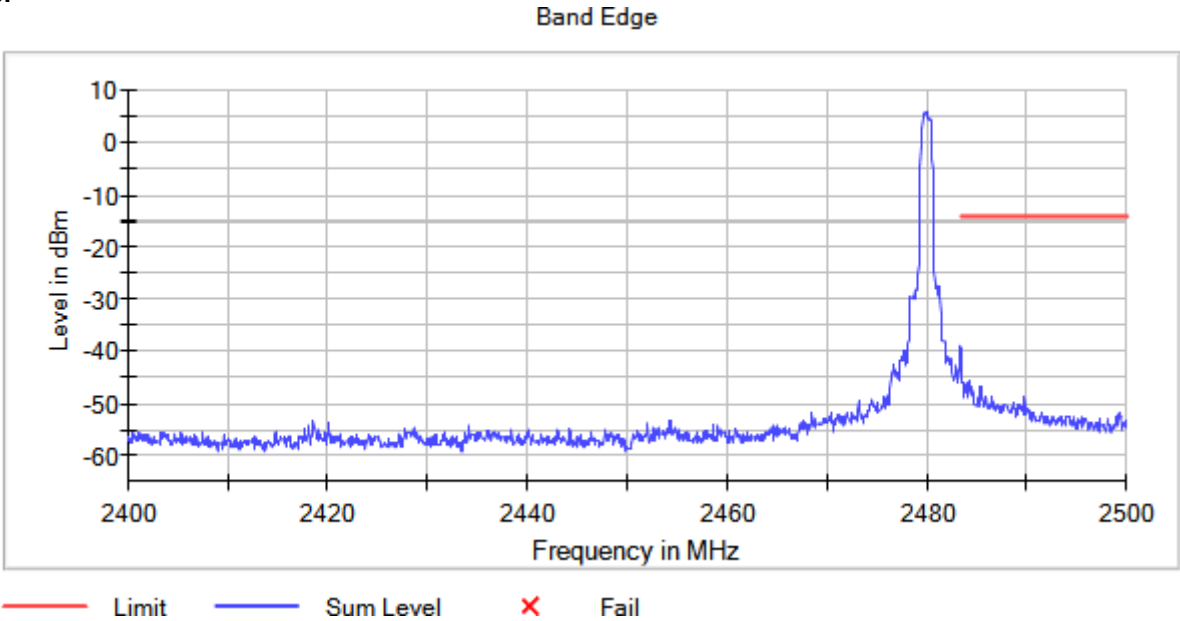

Tables:

Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
SweepTime	113.672 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	148 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB