



Appendix A

RF Test Data for BT LE (Conducted Measurement)

Product Name: Wireless Keyboard

Test Model: TW1868

Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Eason Zhou
Supervised by:	Nick Peng





A.1 DTS Bandwidth

Test Result


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.672	2401.656	2402.328	0.5	PASS
		2440	0.676	2439.660	2440.336	0.5	PASS
		2480	0.664	2479.660	2480.324	0.5	PASS






Test Graphs

BLE_1M_Ant1_2402

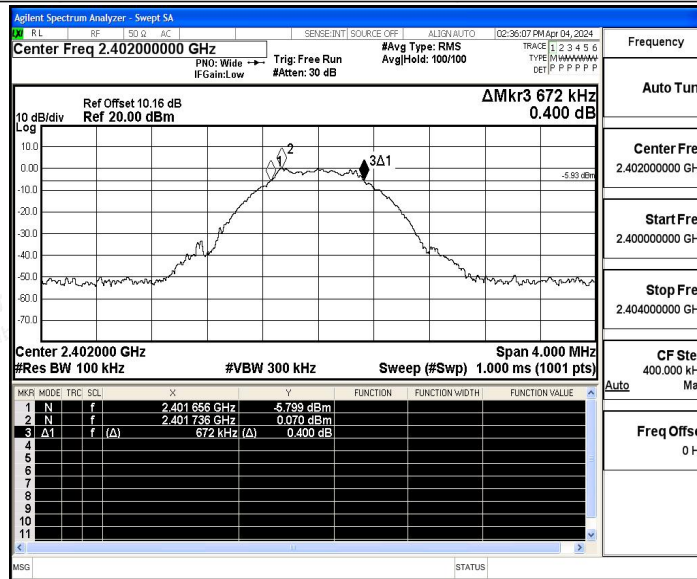


BLE_1M_Ant1_2440

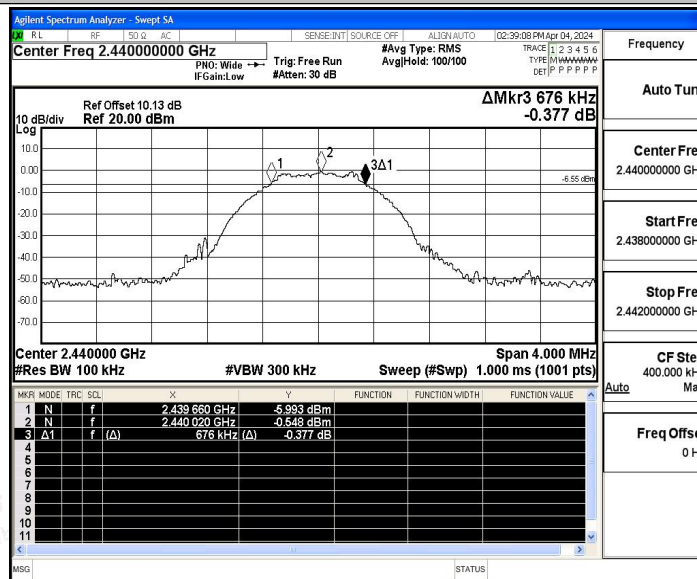

BLE_1M_Ant1_2480



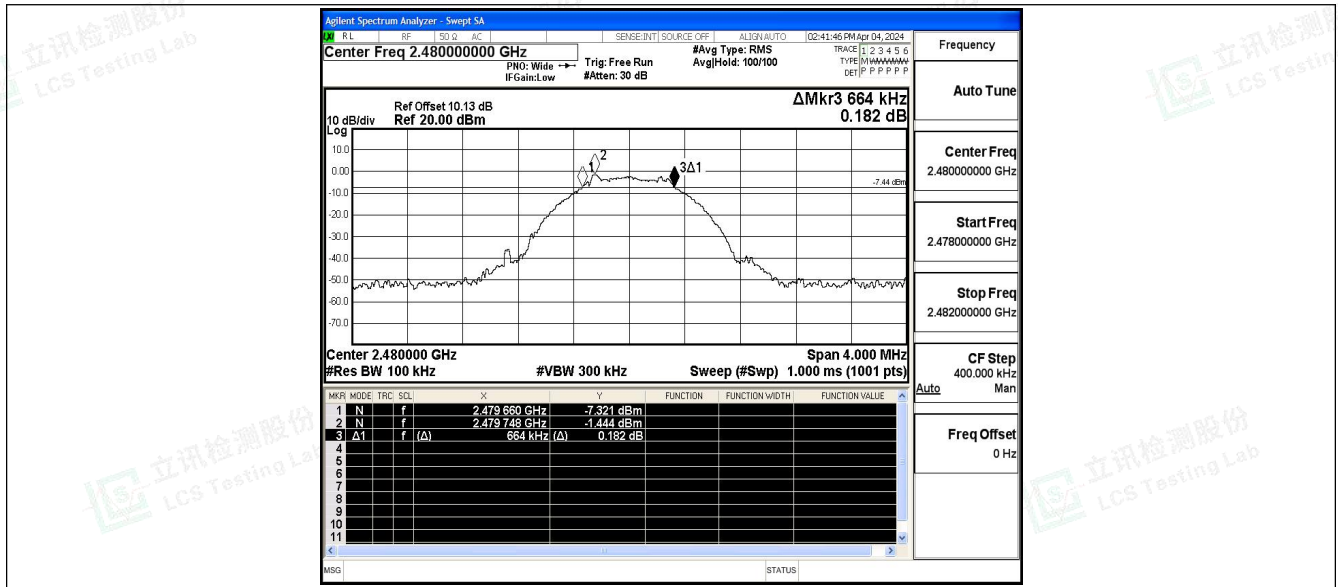



A.2 Maximum peak conducted output power

Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0.98	≤30	PASS
		2440	0.77	≤30	PASS
		2480	-0.74	≤30	PASS






Test Graphs

BLE_1M_Ant1_2402

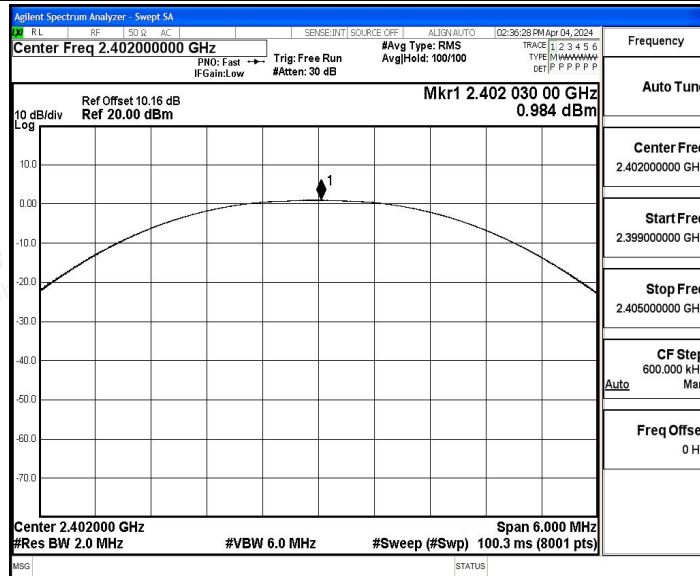


BLE_1M_Ant1_2440

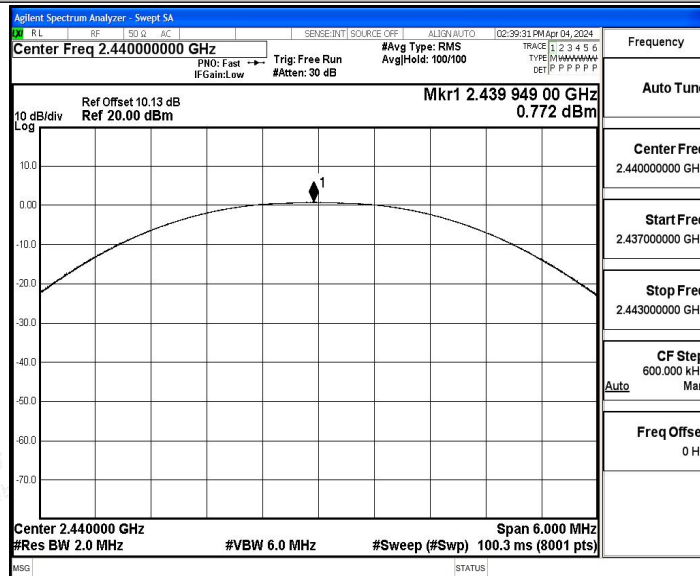

BLE_1M_Ant1_2480



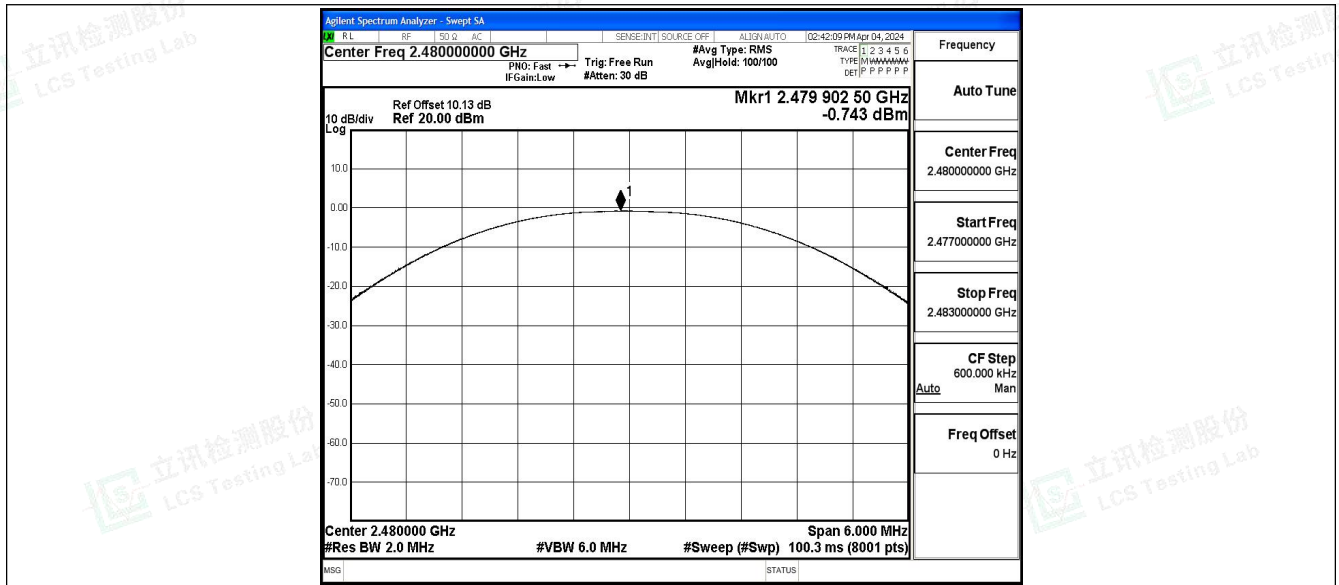

A.3 Maximum power spectral density

Test Result


TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-15.16	≤8.00	PASS
		2440	-15.46	≤8.00	PASS
		2480	-16.94	≤8.00	PASS






Test Graphs

BLE_1M_Ant1_2402

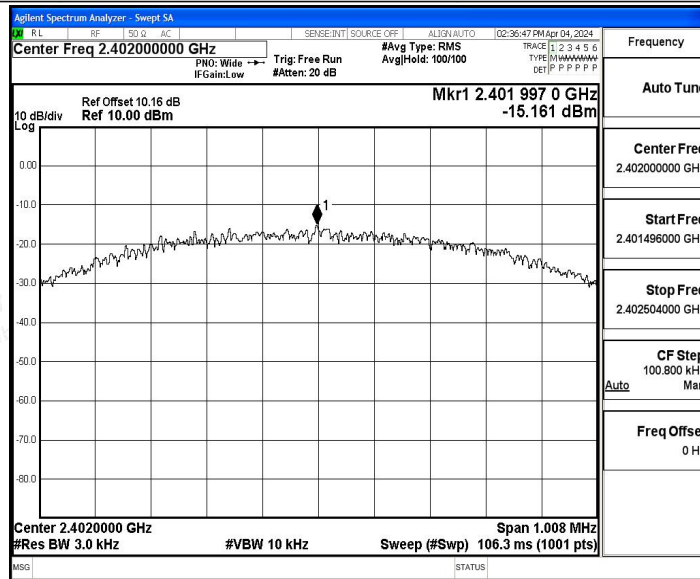


BLE_1M_Ant1_2440

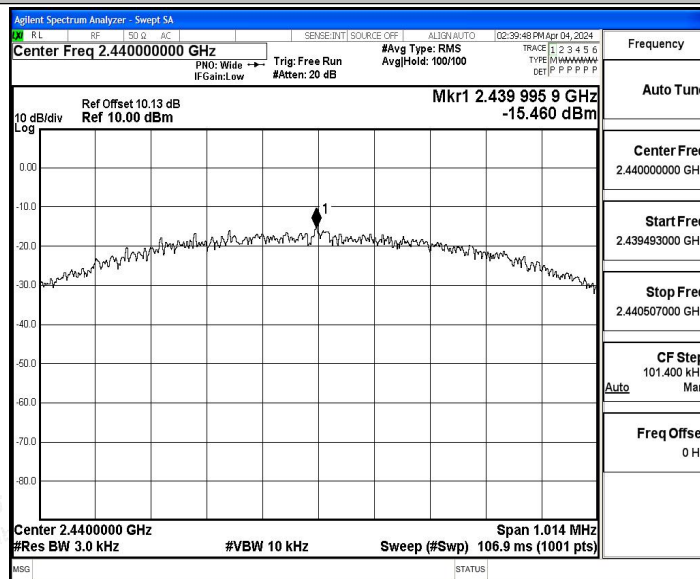

BLE_1M_Ant1_2480



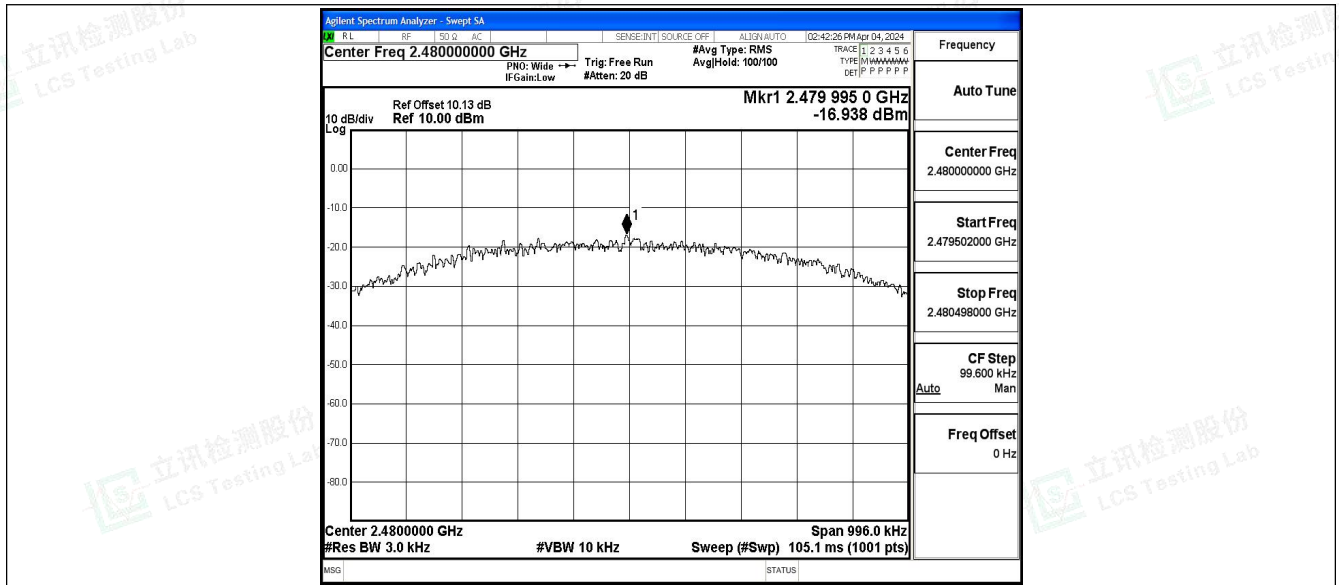



A.4 Band edge measurements

Test Result


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	0.26	-47.98	≤-19.74	PASS
		High	2480	-1.44	-47.64	≤-21.44	PASS






Test Graphs

BLE_1M_Ant1_Low_2402

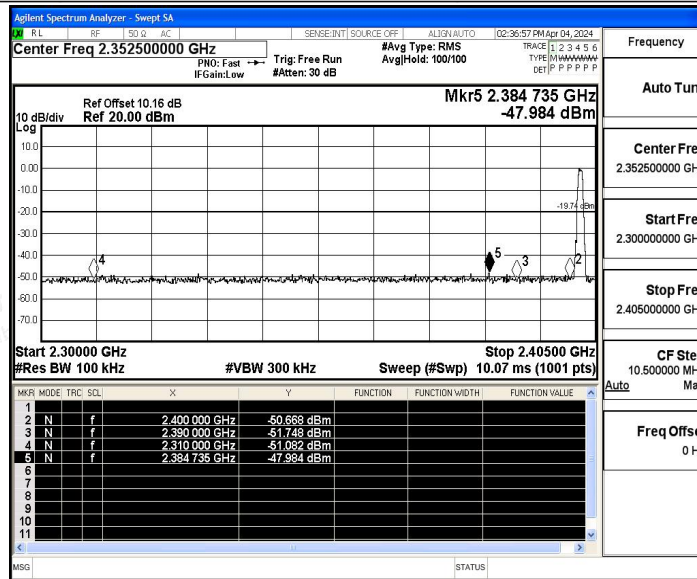

BLE_1M_Ant1_High_2480

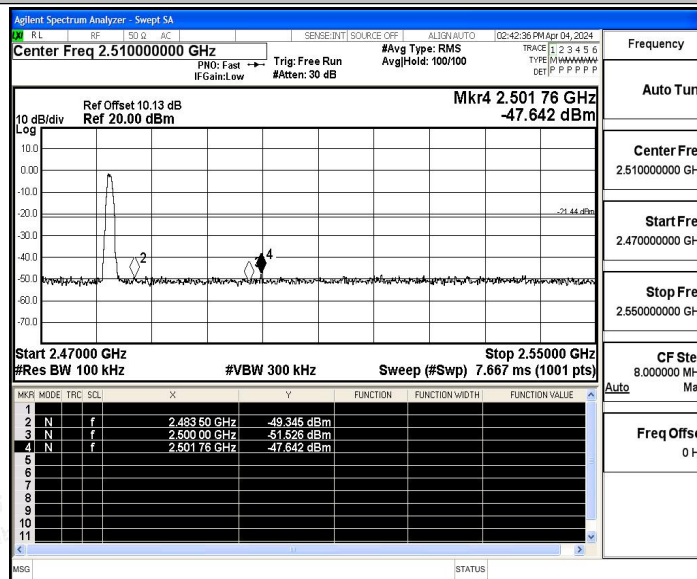

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.5 Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	0.26	-59.37	≤-19.74	PASS
			1000~26500	0.26	-45.84	≤-19.74	PASS
		2440	30~1000	0.07	-59.6	≤-19.93	PASS
			1000~26500	0.07	-47.56	≤-19.93	PASS
		2480	30~1000	-1.44	-59.44	≤-21.44	PASS
			1000~26500	-1.44	-46.4	≤-21.44	PASS






Test Graphs

BLE_1M_Ant1_2402_30~1000

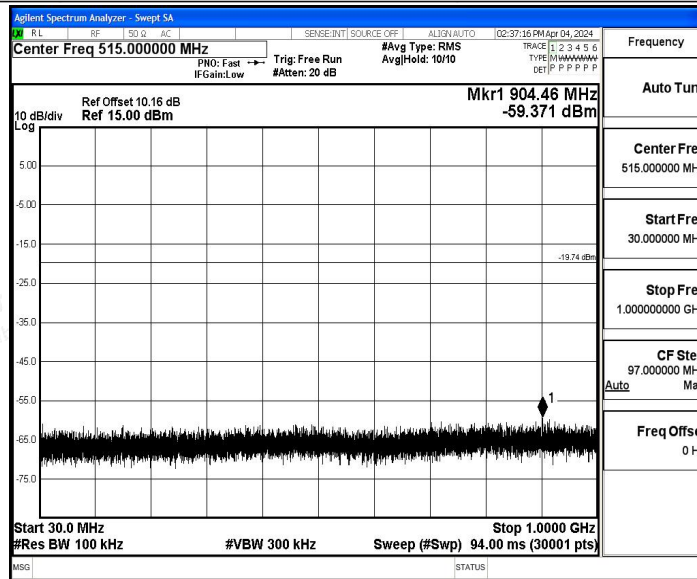


BLE_1M_Ant1_2402_1000~26500

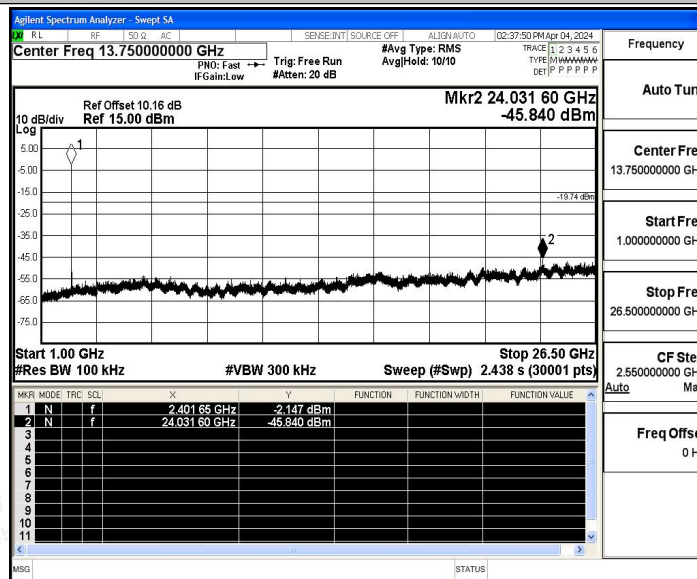


BLE_1M_Ant1_2440_30~1000



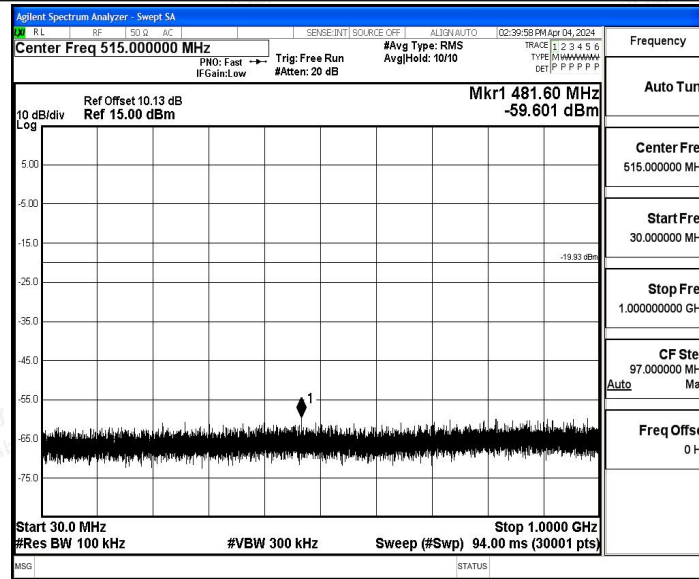


BLE_1M_Ant1_2440_1000~26500

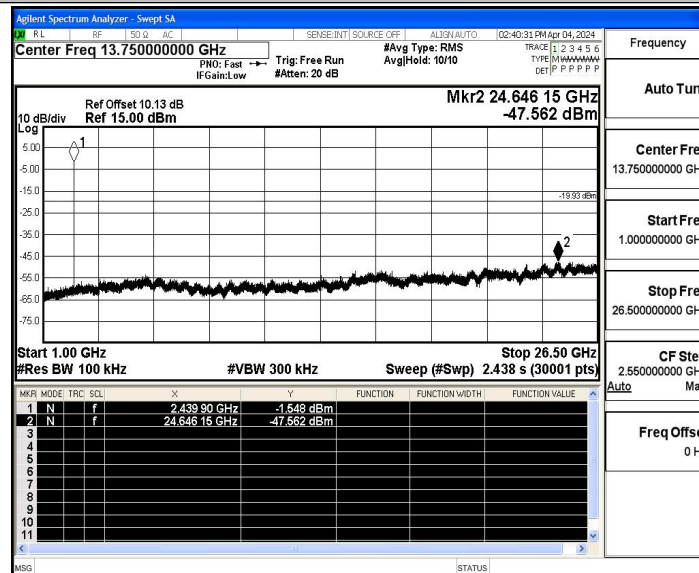


BLE_1M_Ant1_2480_30~1000



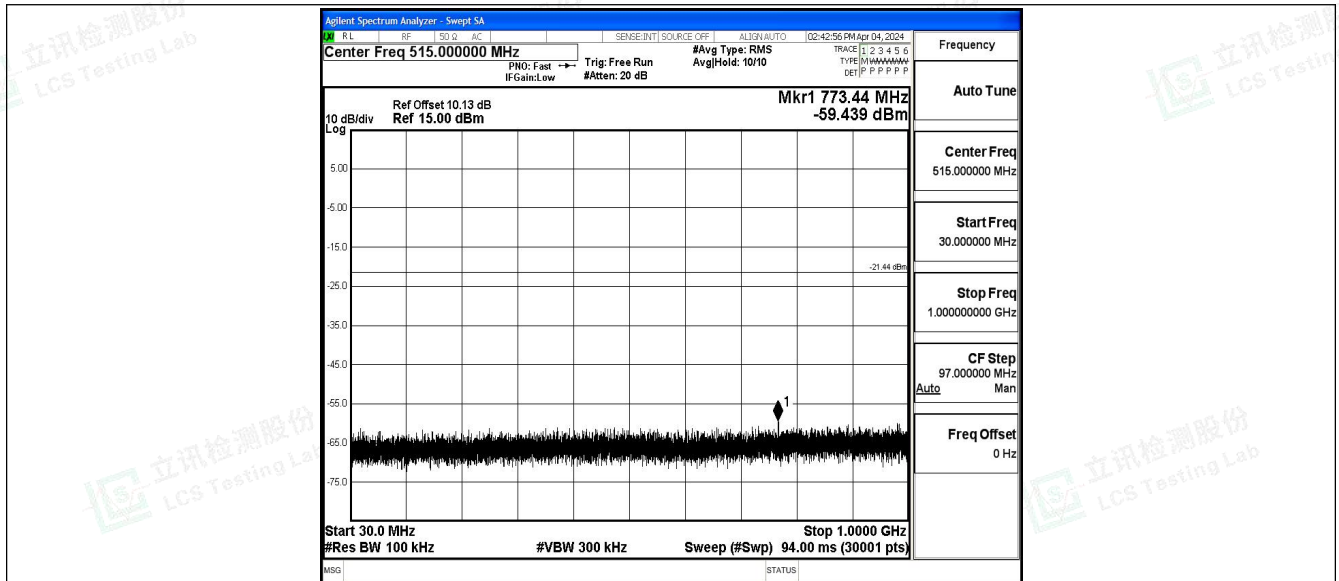

BLE_1M_Ant1_2480_1000~26500

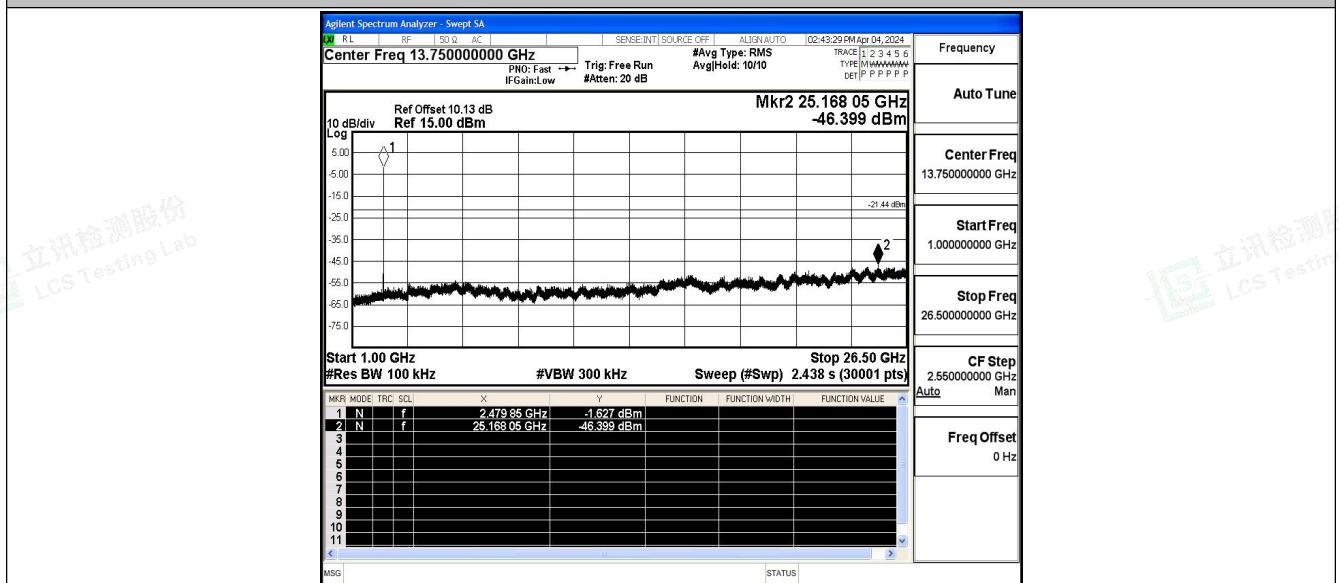



Reference level measurement

Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
BLE_1M	Ant1	2402	2401.75	0.26
		2440	2439.74	0.07
		2480	2479.75	-1.44






Test Graphs

BLE_1M_Ant1_2402

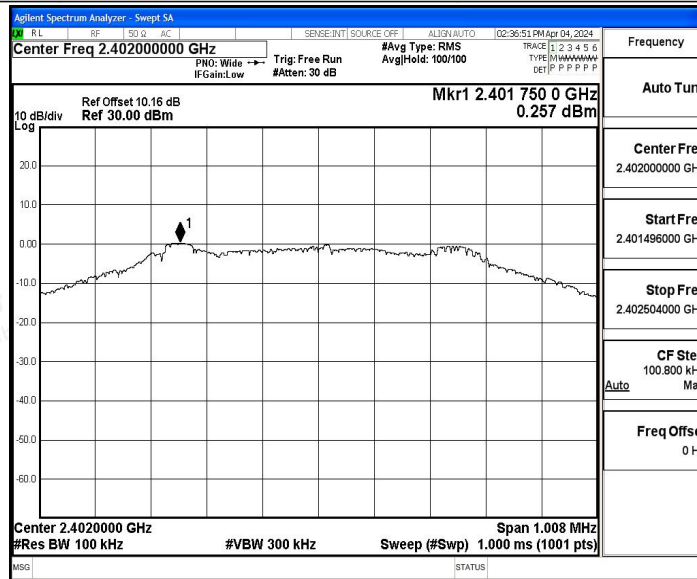


BLE_1M_Ant1_2440

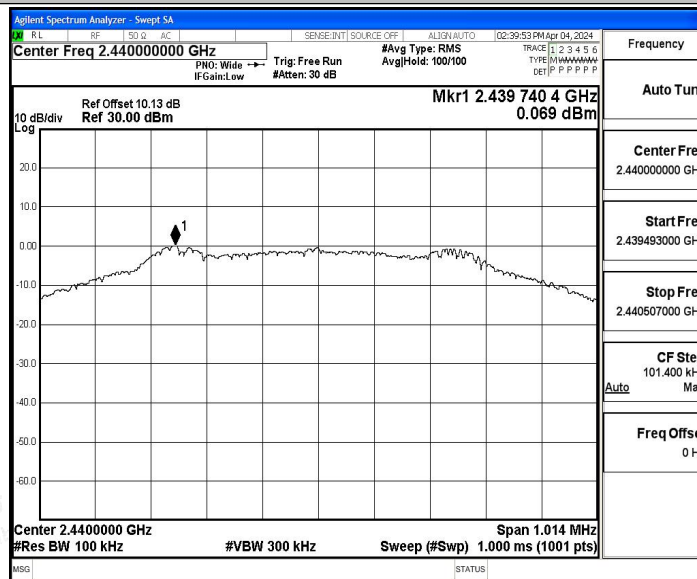

BLE_1M_Ant1_2480



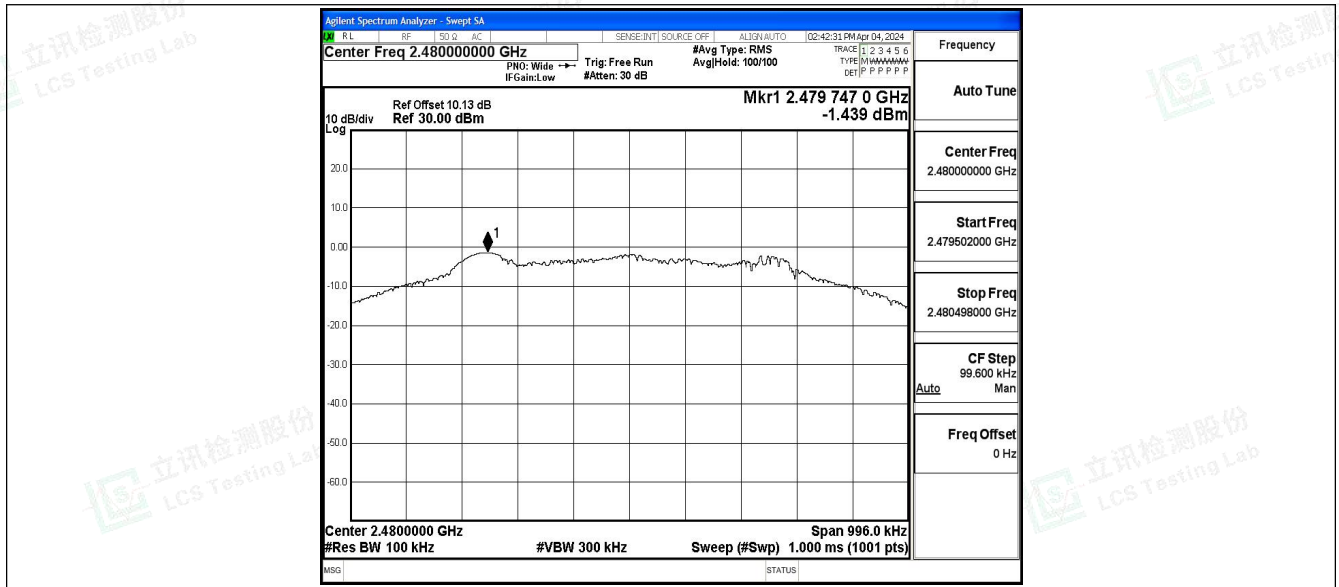



A.6 Duty Cycle

Test Result


TestMode	Antenna	Frequency[MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]	1/T Factor[dB]
BLE_1M	Ant1	2402	1.64	1.88	87.23	0.59	0.61
		2440	1.64	1.88	87.23	0.59	0.61
		2480	1.64	1.88	87.23	0.59	0.61






Test Graphs

BLE_1M_Ant1_2402

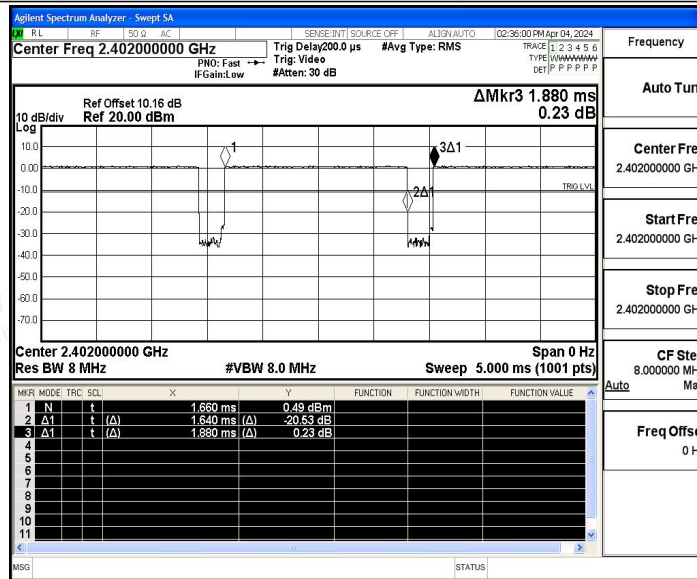


BLE_1M_Ant1_2440

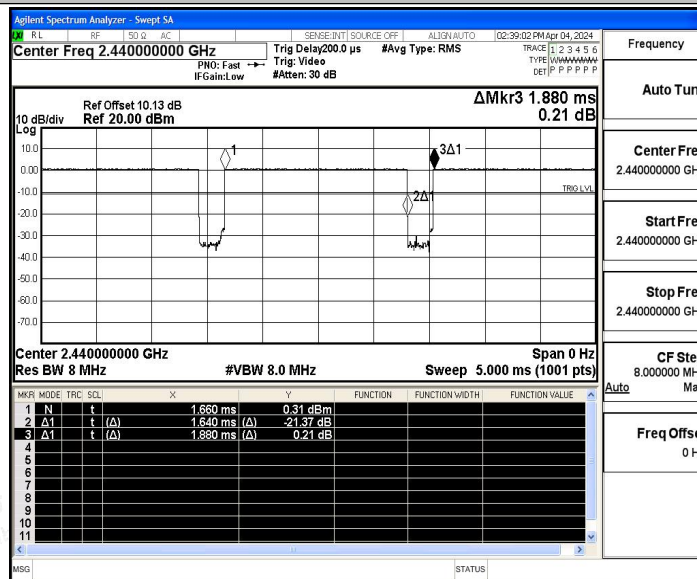

BLE_1M_Ant1_2480



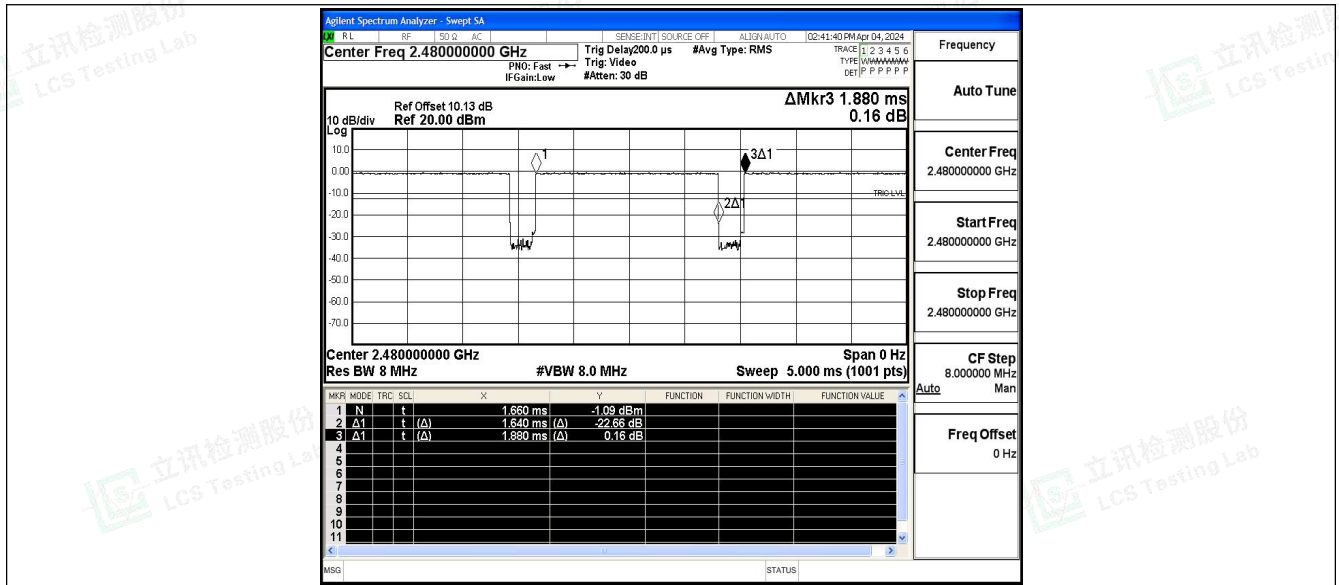



A.7 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Frequenc y[MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-47.14	≤-41.20	48.06	≤54	PASS
				AV	2381.165	-46.3	≤-41.20	48.90	≤54	PASS
				AV	2390.000	-47.27	≤-41.20	47.93	≤54	PASS
				Peak	2310.000	-39.64	≤-21.20	55.56	≤74	PASS
				Peak	2336.750	-36.57	≤-21.20	58.63	≤74	PASS
				Peak	2390.000	-39.6	≤-21.20	55.60	≤74	PASS
		High	2480	AV	2483.500	-47.31	≤-41.20	47.89	≤54	PASS
				AV	2496.000	-46.18	≤-41.20	49.02	≤54	PASS
				AV	2500.000	-46.09	≤-41.20	49.11	≤54	PASS
				Peak	2483.500	-40.06	≤-21.20	55.14	≤74	PASS
				Peak	2492.640	-36.81	≤-21.20	58.39	≤74	PASS
				Peak	2500.000	-38.93	≤-21.20	56.27	≤74	PASS

Note:


1. The Antenna Gain is compensated in the graph. The Correction Factor is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.






Test Graphs

BLE_1M_Ant1_Low_2402_AV

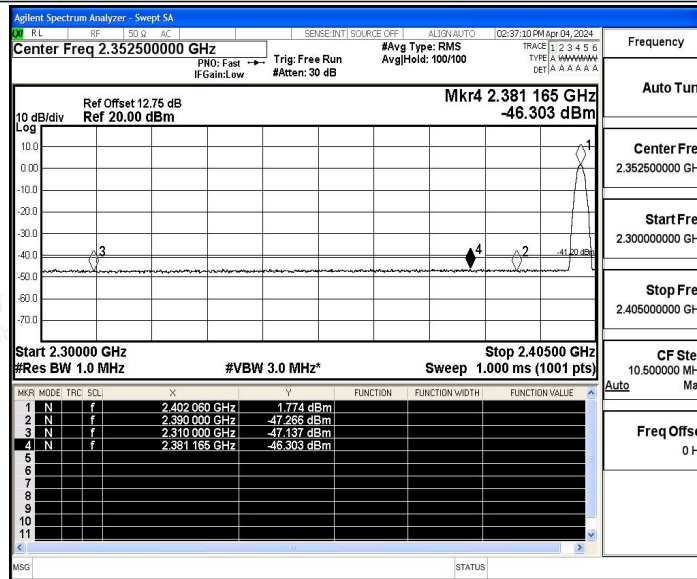


BLE_1M_Ant1_Low_2402_Peak

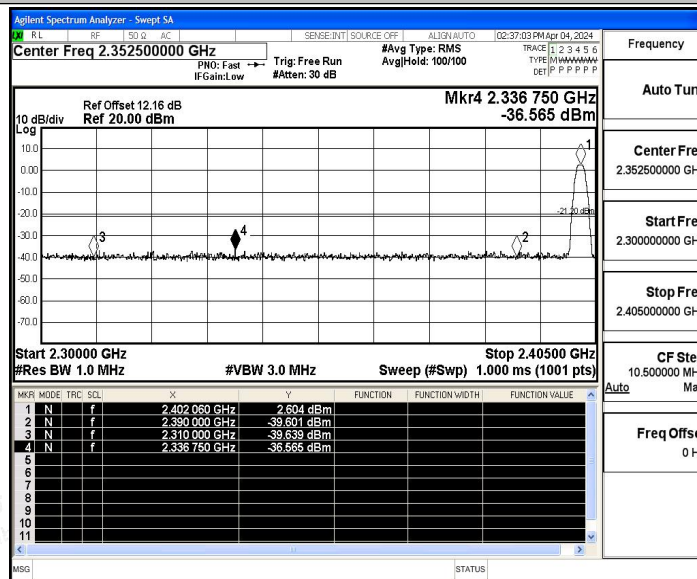

BLE_1M_Ant1_High_2480_AV



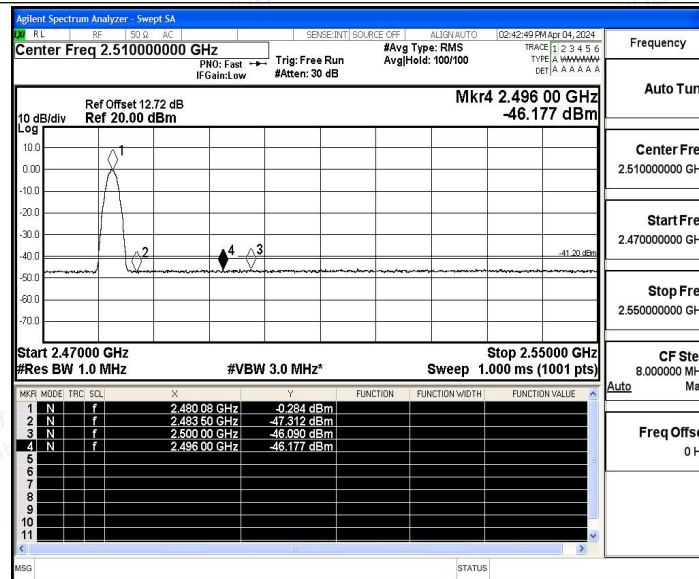

BLE_1M_Ant1_High_2480_Peak

