


## 16 CONDUCTED SPURIOUS EMISSIONS

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Charlie
<b>Temperature</b>	25 °C
<b>Humidity</b>	60%

### 16.1 LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

## 16.2 BLOCK DIAGRAM OF TEST SETUP

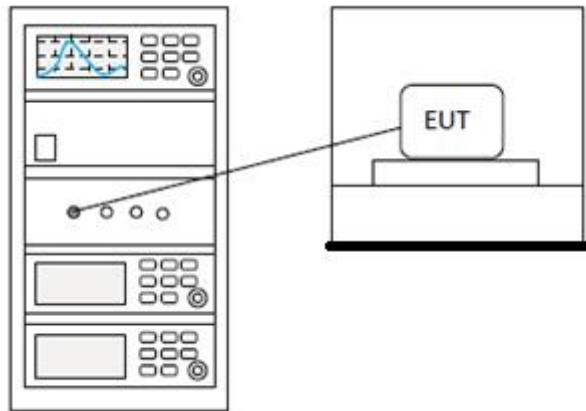

## 16.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


## 17 POWER SPECTRUM DENSITY

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.10.2
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Charlie
<b>Temperature</b>	25 °C
<b>Humidity</b>	60%

### 17.1 LIMITS

<b>Limit:</b>	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission
---------------	--

### 17.2 BLOCK DIAGRAM OF TEST SETUP

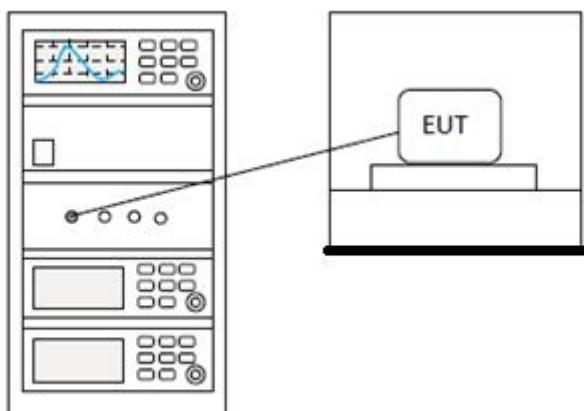

### 17.3 TEST DATA

<b>Pass: Please Refer To Appendix: Appendix1 For Details</b>
--


## 18 CONDUCTED PEAK OUTPUT POWER

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Charlie
<b>Temperature</b>	25 °C
<b>Humidity</b>	60%

### 18.1 LIMITS

<b>Frequency range(MHz)</b>	<b>Output power of the intentional radiator(watt)</b>
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### 18.2 BLOCK DIAGRAM OF TEST SETUP

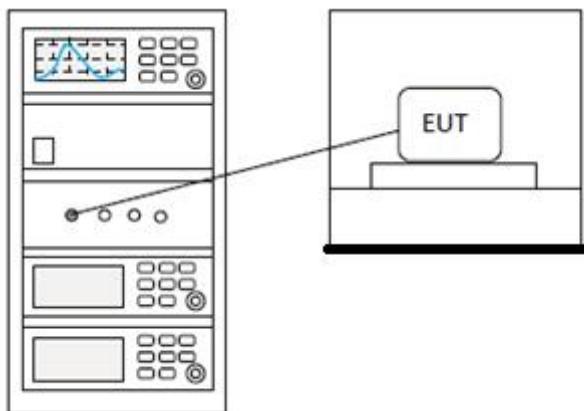

### 18.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


## 19 MINIMUM 6DB BANDWIDTH

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 11.8.1
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Charlie
<b>Temperature</b>	25 °C
<b>Humidity</b>	60%

### 19.1 LIMITS

**Limit:**  $\geq 500$  kHz

### 19.2 BLOCK DIAGRAM OF TEST SETUP

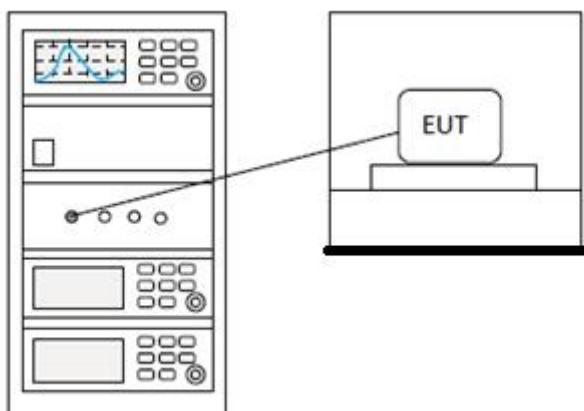

### 19.3 TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**


## 20 APPENDIX

### Appendix1


#### 20.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.753	30	Pass
NVNT	BLE 1M	2442	Ant1	-0.738	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.972	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

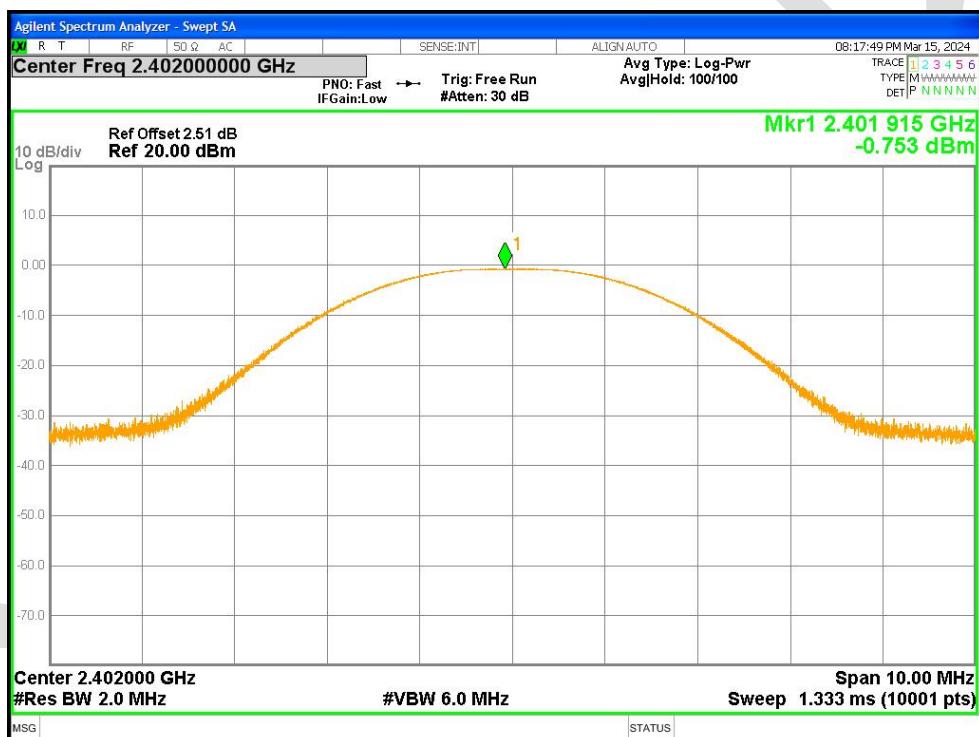

Power NVNT BLE 1M 2442MHz Ant1

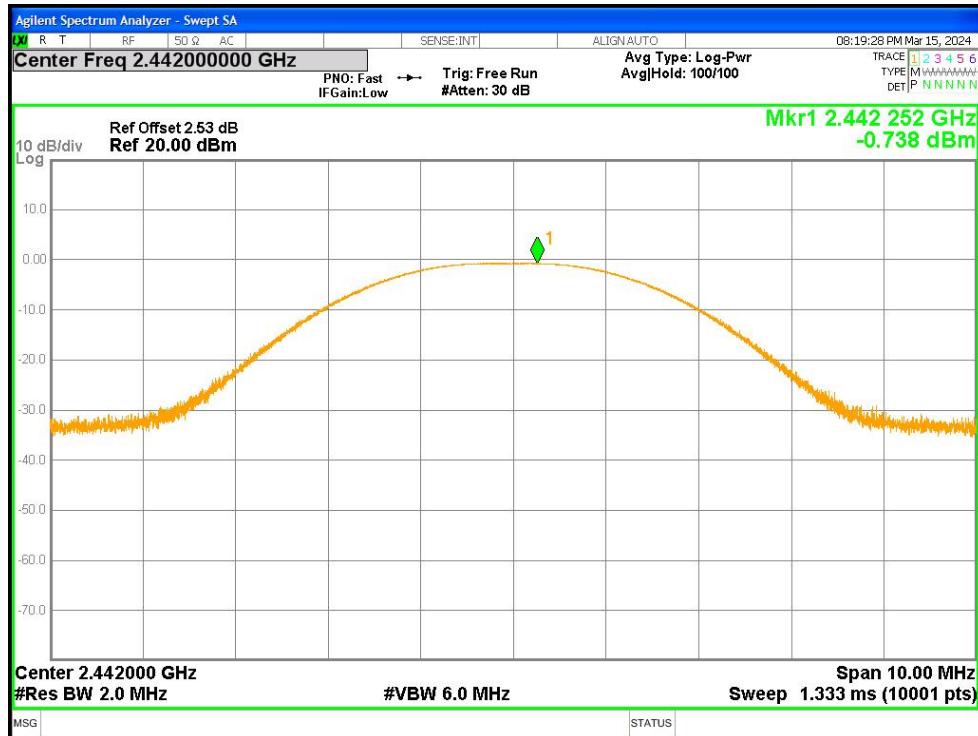


Power NVNT BLE 1M 2480MHz Ant1

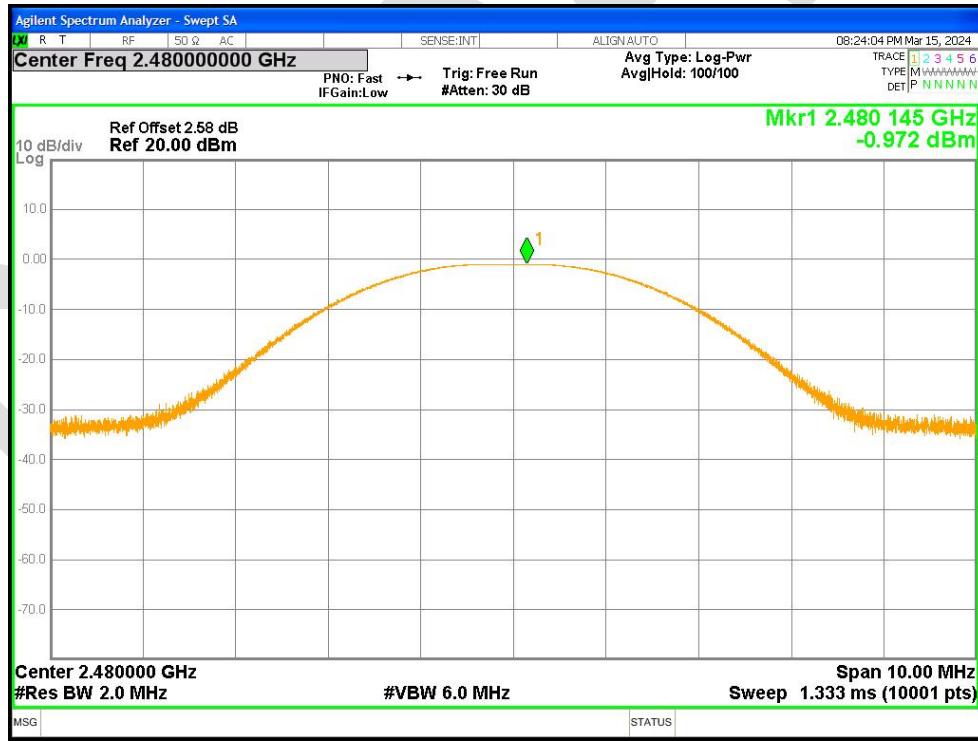


## 20.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.632	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.648	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.65	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

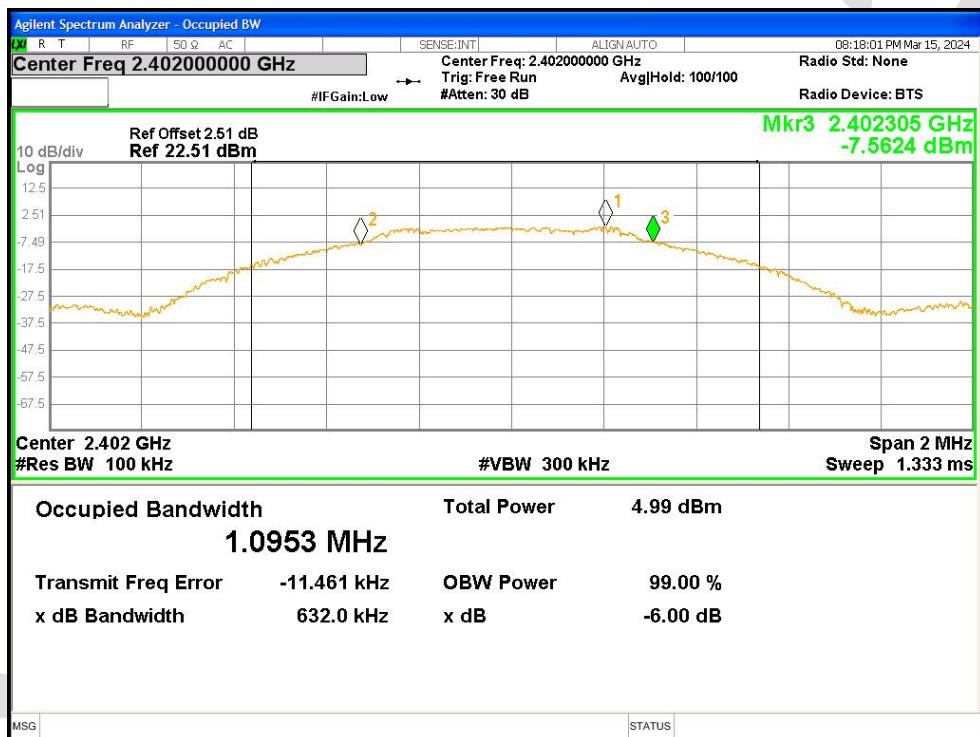

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

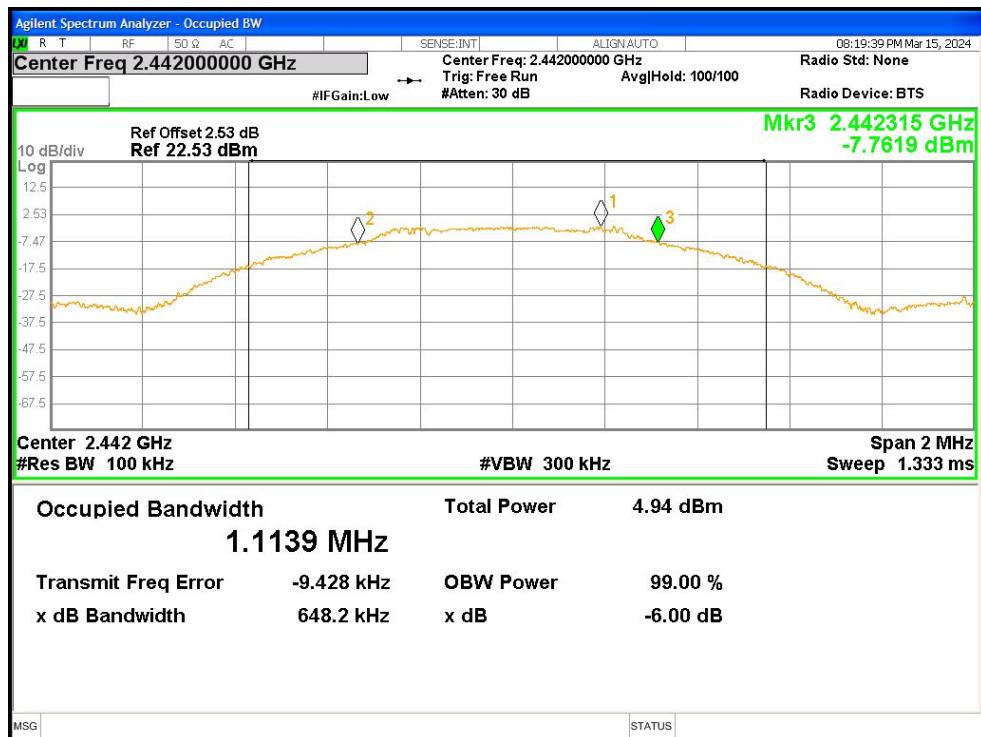


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

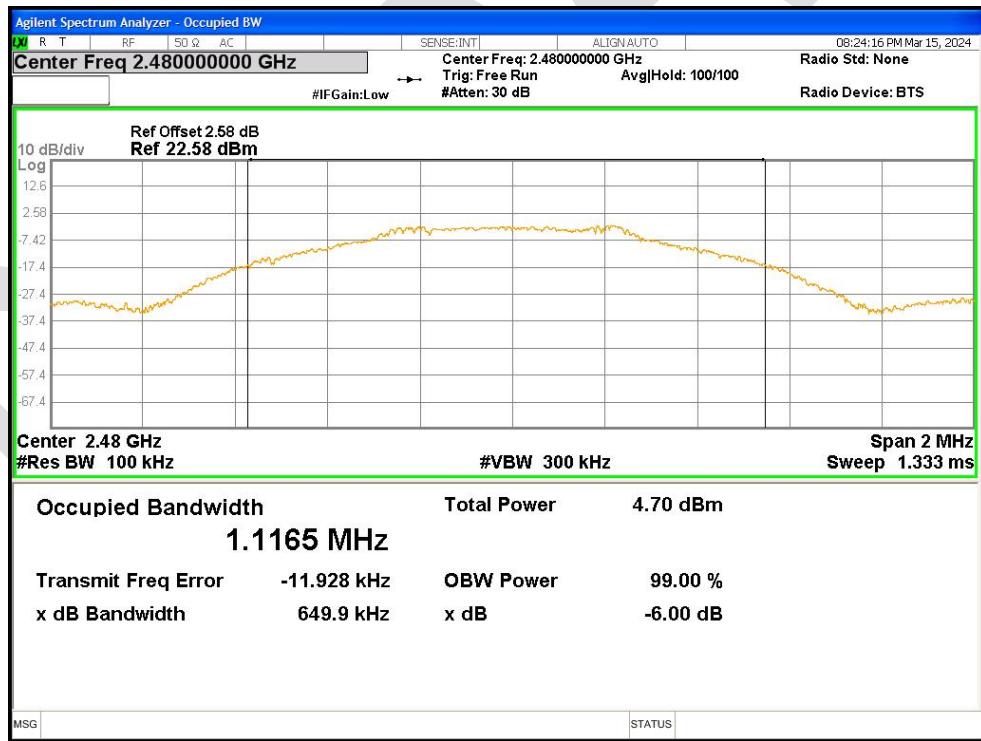


### 20.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0807
NVNT	BLE 1M	2442	Ant1	1.1001
NVNT	BLE 1M	2480	Ant1	1.0961


OBW NVNT BLE 1M 2402MHz Ant1

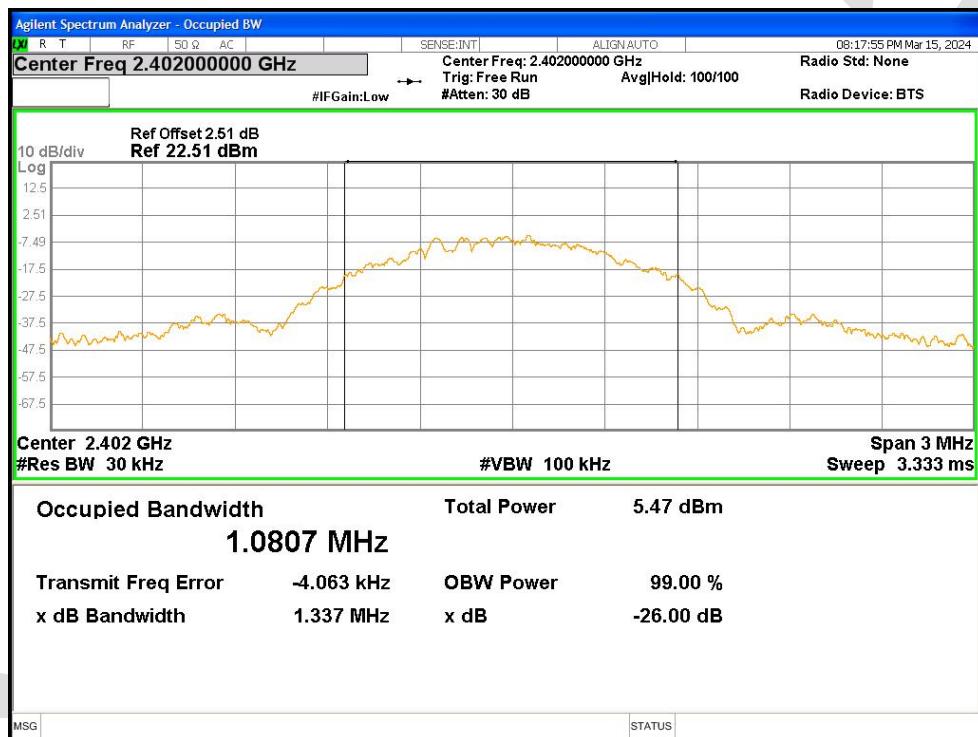

OBW NVNT BLE 1M 2442MHz Ant1

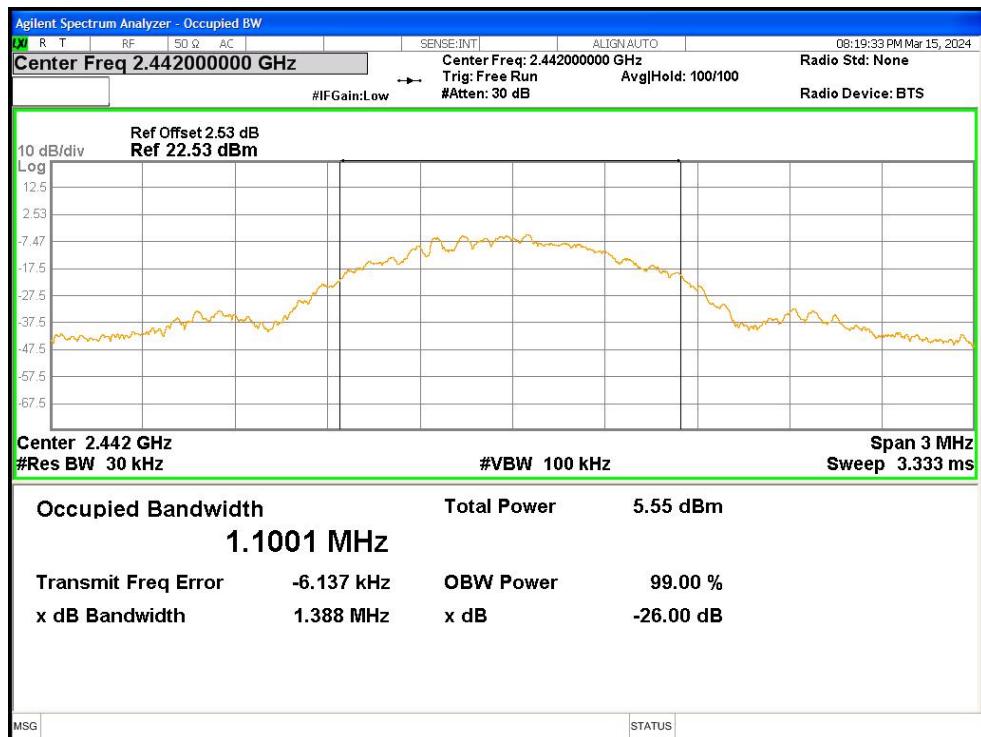


OBW NVNT BLE 1M 2480MHz Ant1

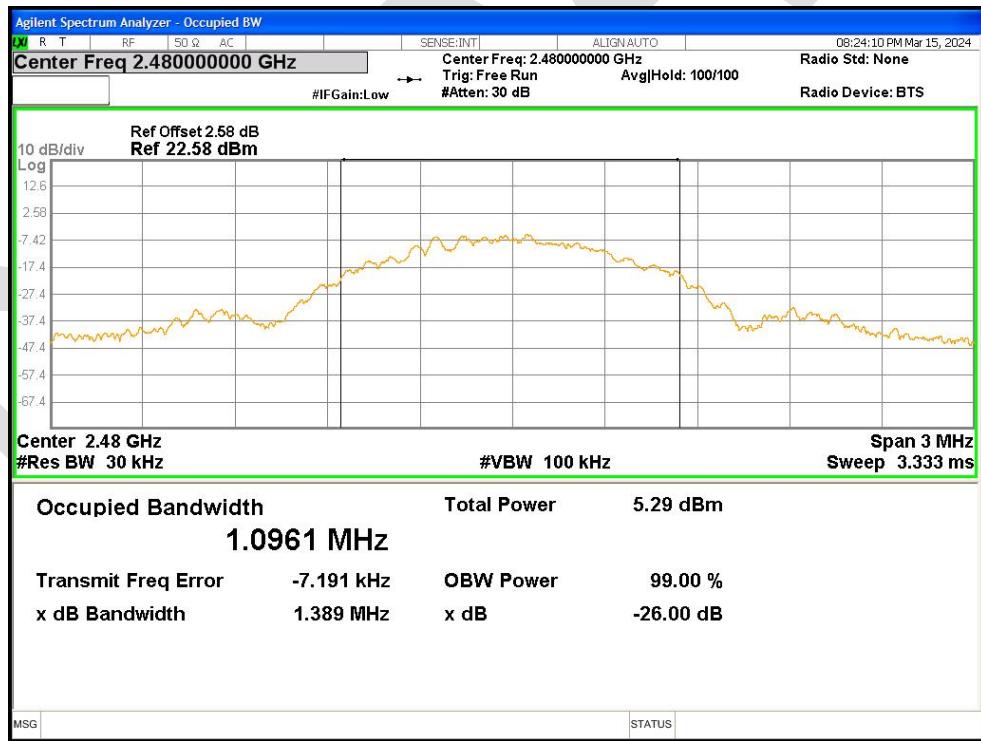


## 20.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-14.339	8	Pass
NVNT	BLE 1M	2442	Ant1	-14.364	8	Pass
NVNT	BLE 1M	2480	Ant1	-14.616	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

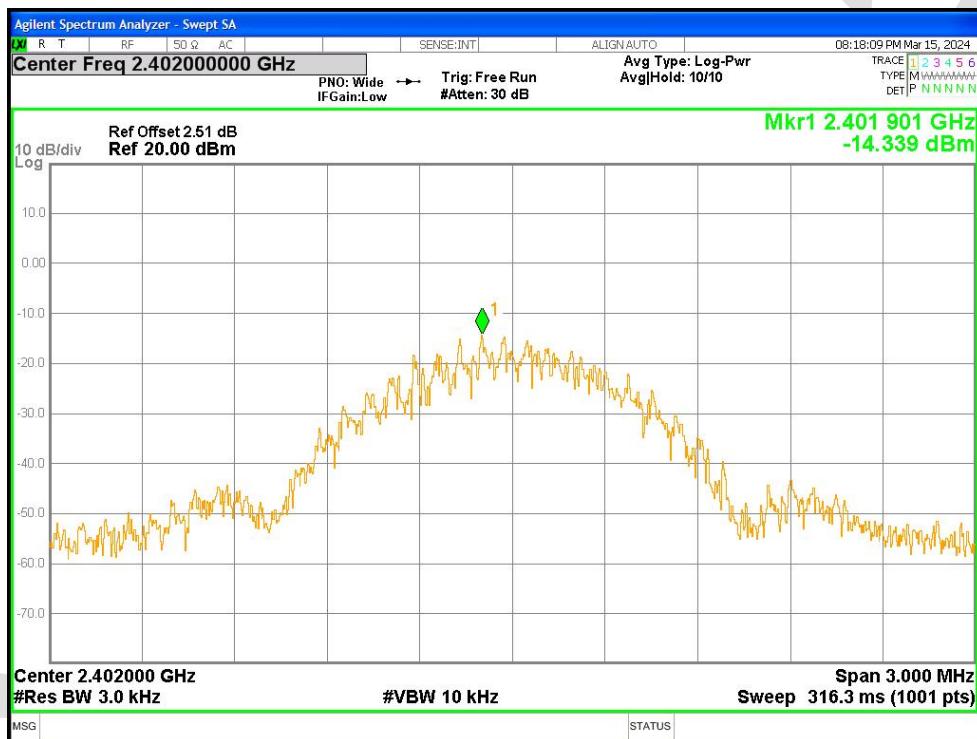

PSD NVNT BLE 1M 2442MHz Ant1

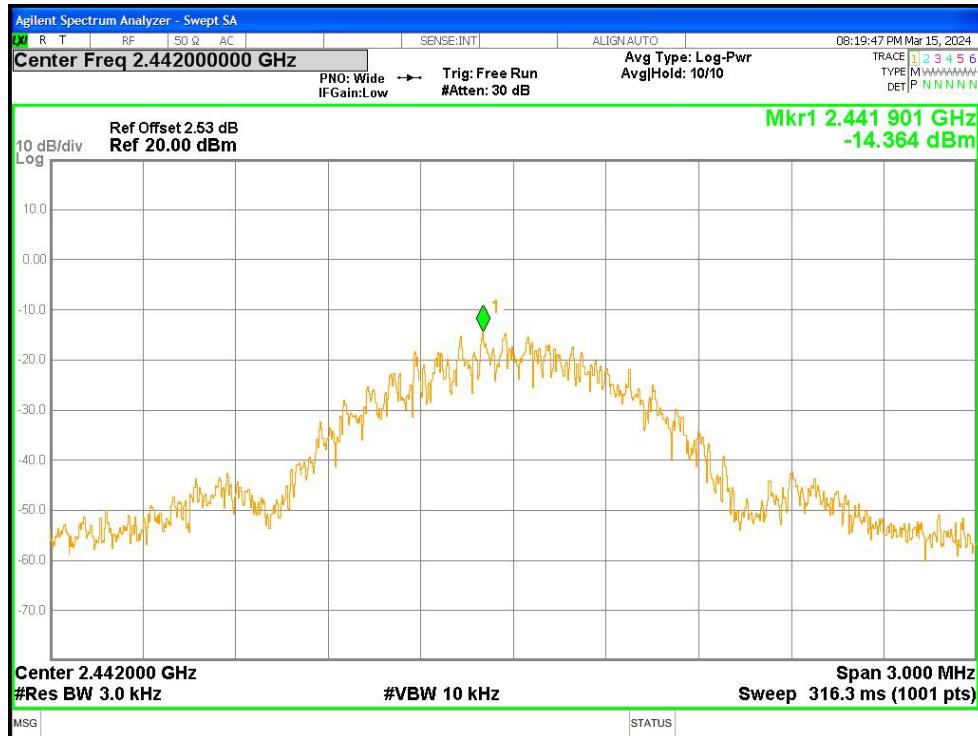


PSD NVNT BLE 1M 2480MHz Ant1




## 20.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-38.73	-20	Pass
NVNT	BLE 1M	2480	Ant1	-40.24	-20	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

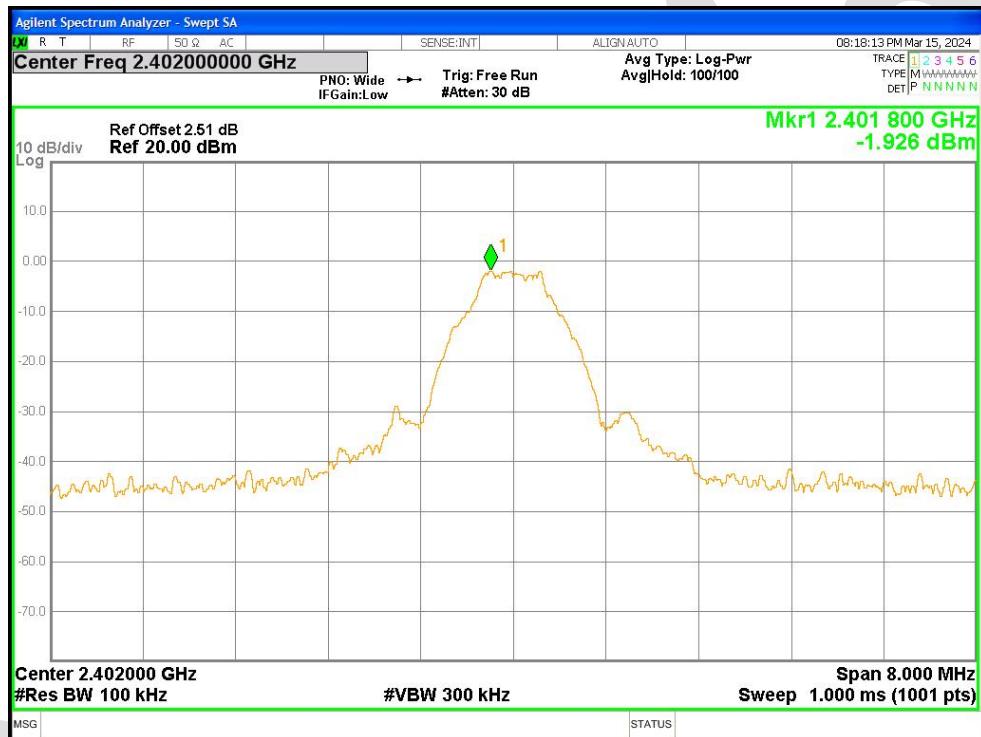


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

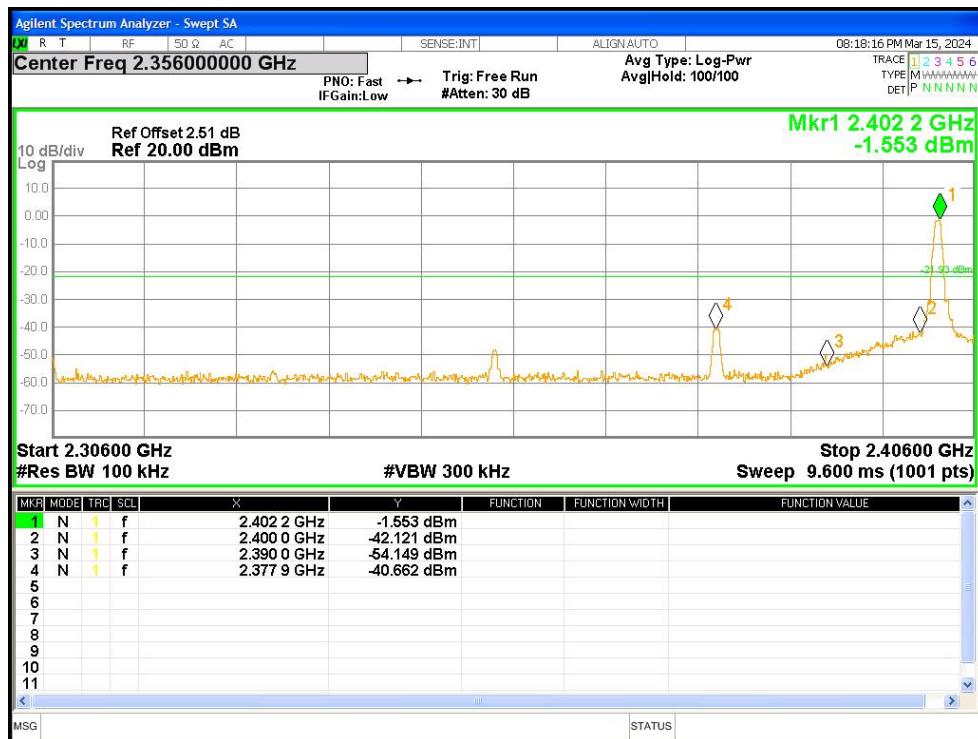

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref




Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

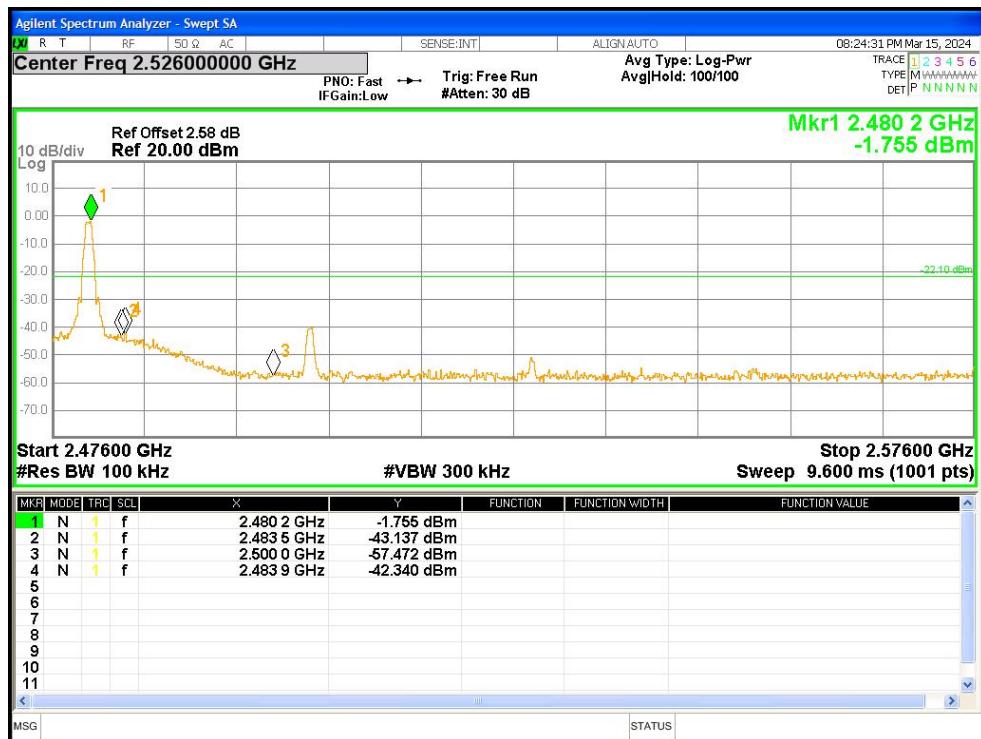


## 20.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-42.11	-20	Pass
NVNT	BLE 1M	2442	Ant1	-42.92	-20	Pass
NVNT	BLE 1M	2480	Ant1	-41.51	-20	Pass


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

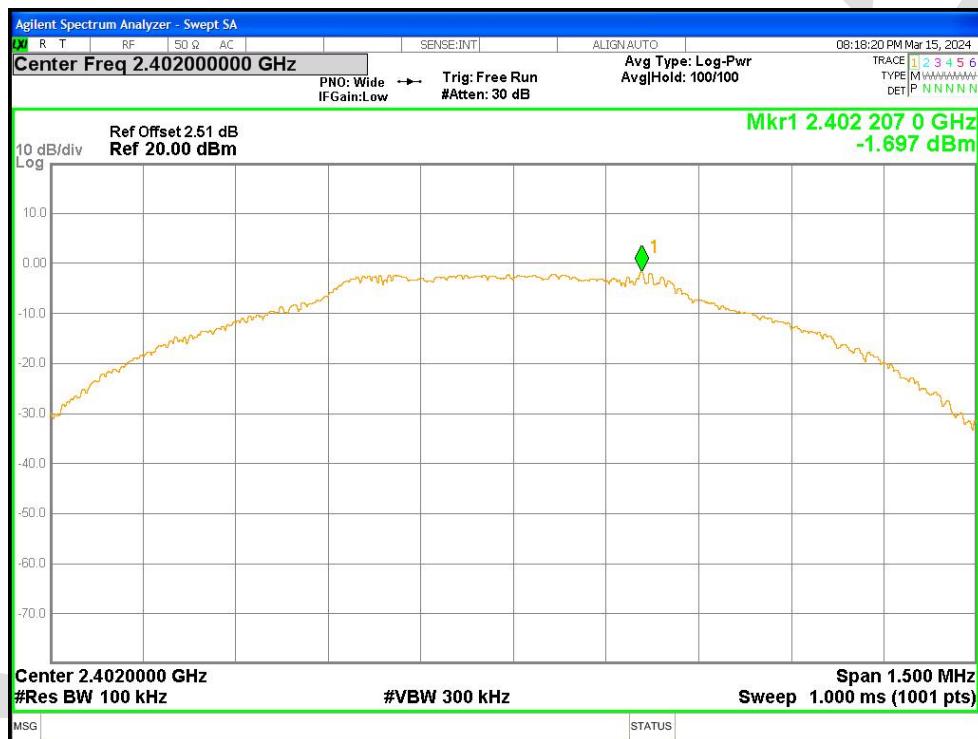


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

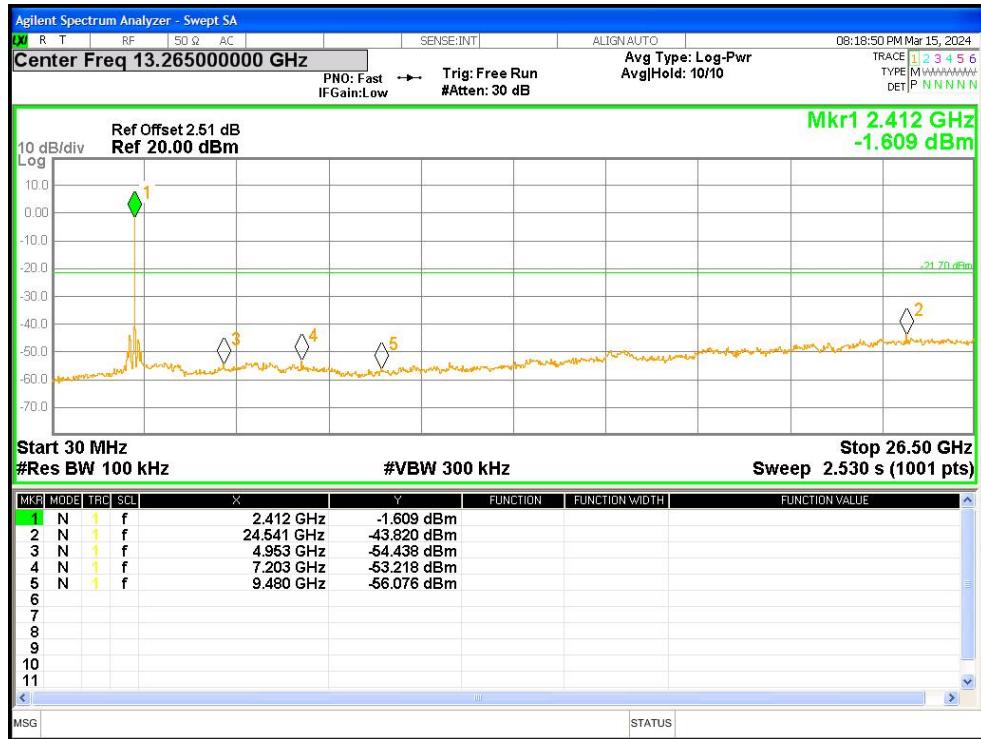


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

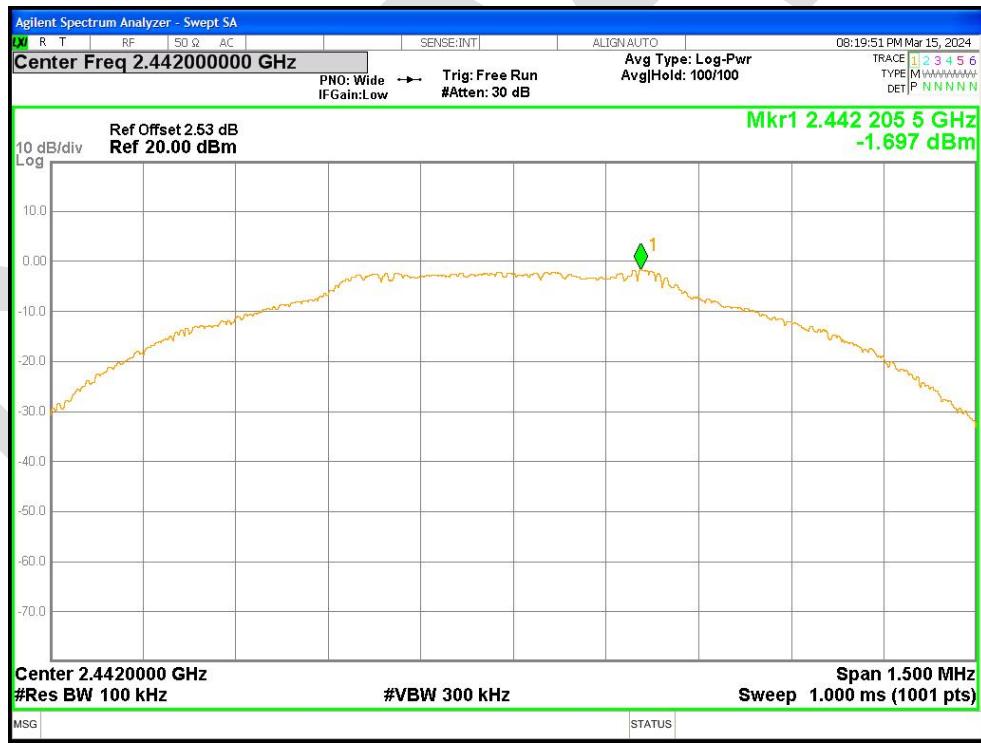

Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

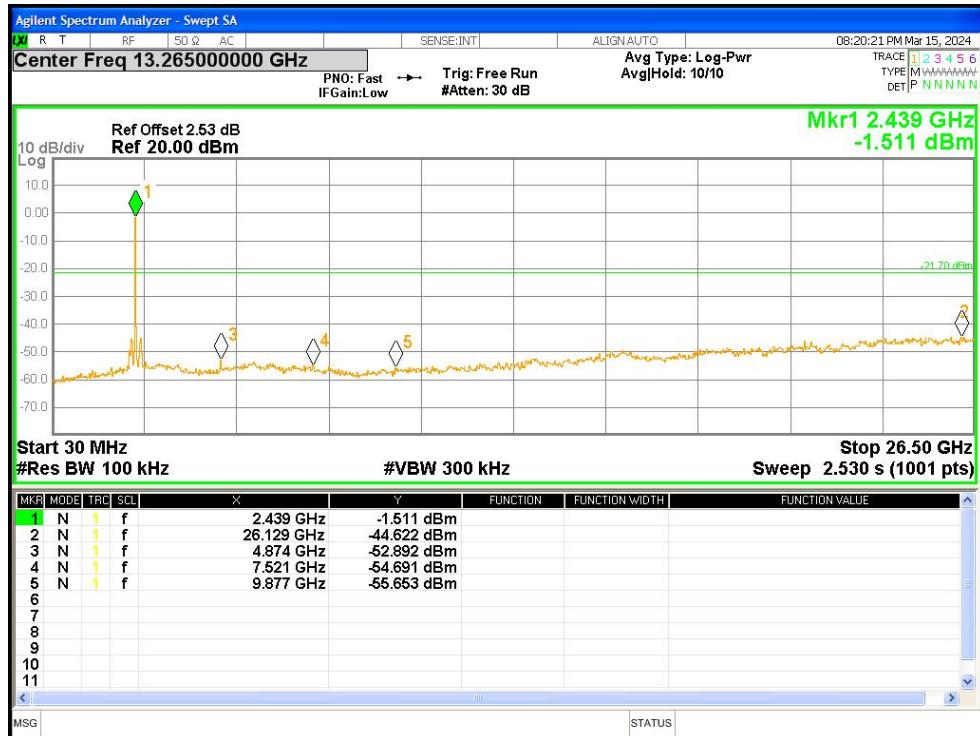

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

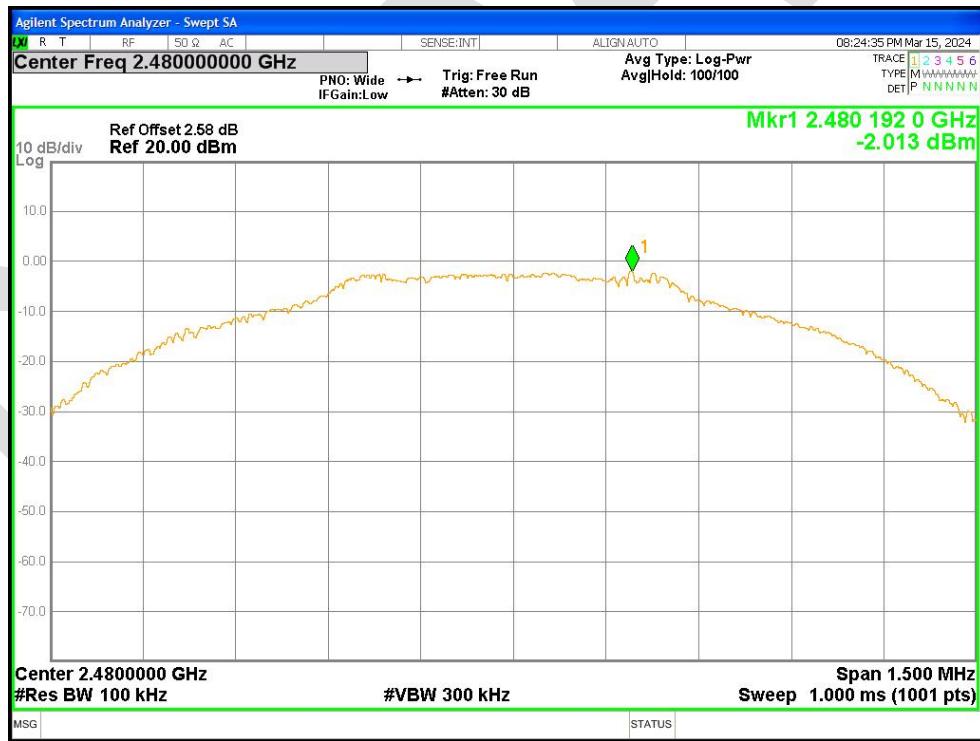

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission