


## ✓ IMPORTANT

Before installation, please make sure that all accessories are ready.  
(As shown in the picture below).

Estimated installation time:

**60 minutes**


Required tools:



(to be prepared by oneself)


## ✓ PRODUCT INFORMATION

1




Bracket A x1

2

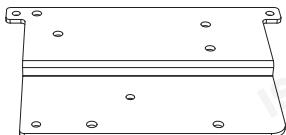

Bracket B x1

3



Fuse Box x1


4



Circuit Breaker x1

5

**NOTE:** It needs to be fully charged using [19] before use.



Switch Button x1

6




Fuse Link Wire (Green) x1

7




Hex Wrench x2

8



Positive and Negative Pole Harness A (Red) x1

9




Positive and Negative Pole Harness B (Red) x1

10



Positive and Negative Pole Harness C (Black) x1

11



Positive and Negative Pole Harness D x1

12



Zip Tie x10

13



Rubber Nut x1

14



Nylon Standoff x1

15



M5x20 Round Head Hex Screw with Washer x1

16



M6x20 Round Head Hex Screw with Washer x1

17




M6x8 Round Head Hex Screw with Washer x4

18




M6x15 Pan Head Cross Screw x2

19




Usb Charging Cable x1

20



Antenna and Adhesive x1


## SPARE PRODUCT INFORMATION

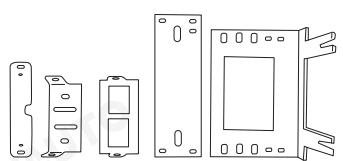


1 Spare Bracket



2 Fuse Link Wire (Gray)



3 Spare Screw




4 Sticker




Product Brochure

## ✓ INSTALLATION METHOD


### STEP 1

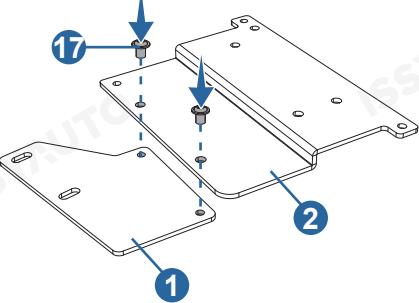

### STEP 2

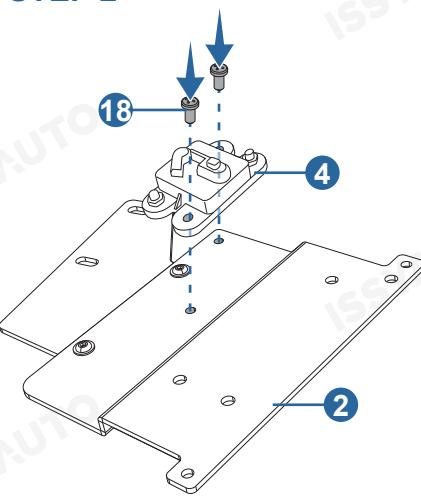

### STEP 3

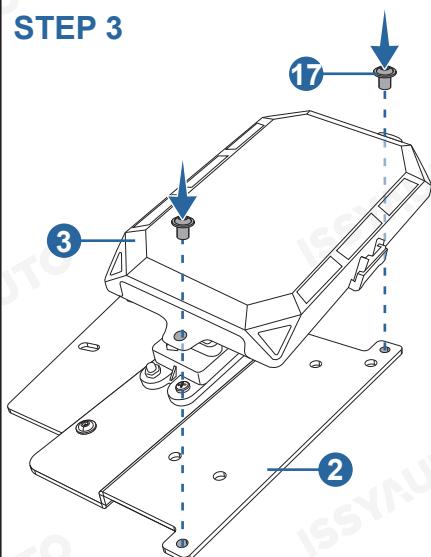


**STEP 1:** Use [17] to assemble [1] and [2].

**STEP 2:** Use [18] to assemble [4] and [2].

**STEP 3:** Use [17] to assemble [3] and [2].


### STEP 4

#### Engine Compartment

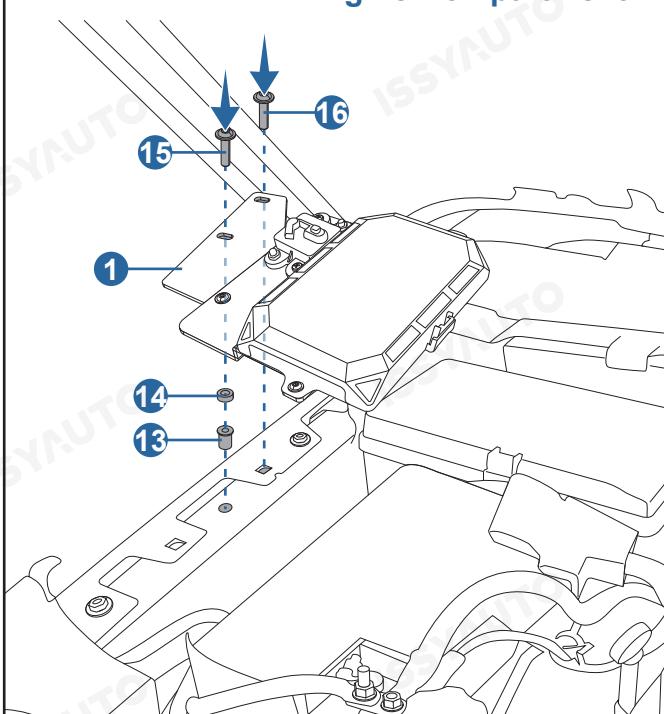

### STEP 5


#### Engine Compartment

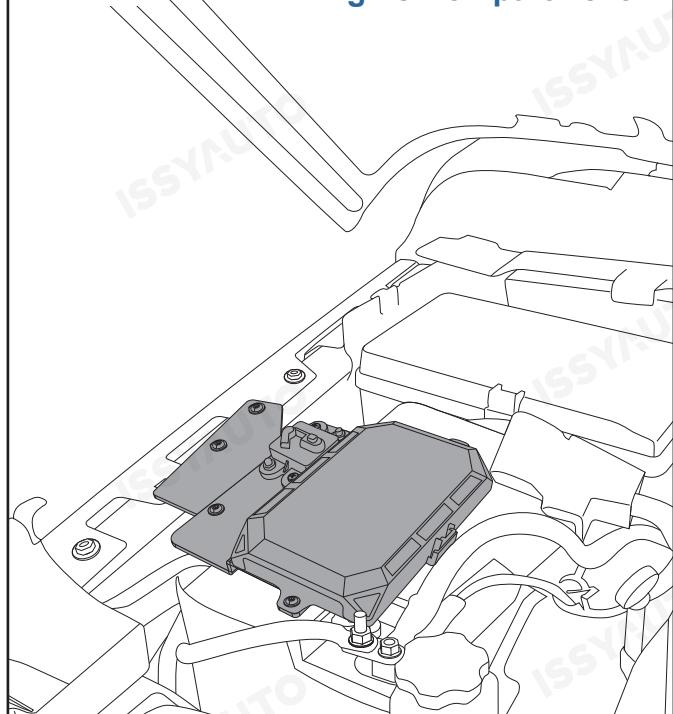


**STEP 4:** Use [13][14][15][16] to install the assembled [1] in the engine compartment as shown in the figure.

**STEP 5:** Installation is complete.

## WIRING STEPS

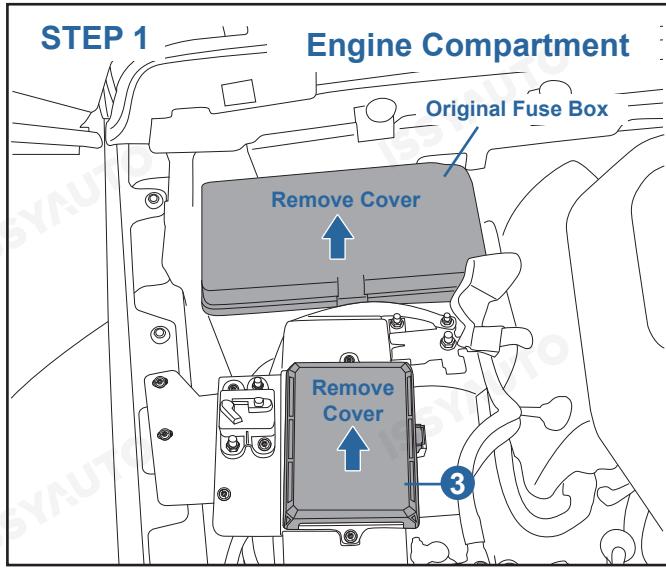


**STEP 1:** Remove the lid of [3] and take out the original fuse box cover.

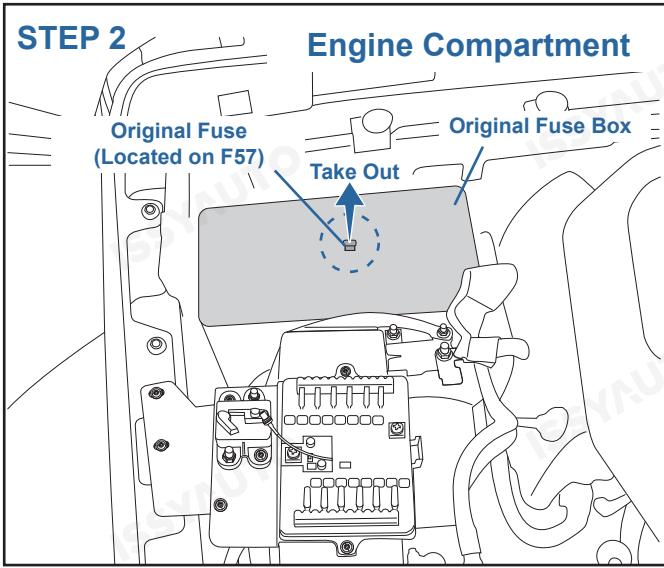


**STEP 2:** Take out the original fuse from the original fuse box (Find the location of F57 on the back of the original fuse box cover.)


**NOTE:** F57 or other suitable original insurance films can be selected according to actual needs.

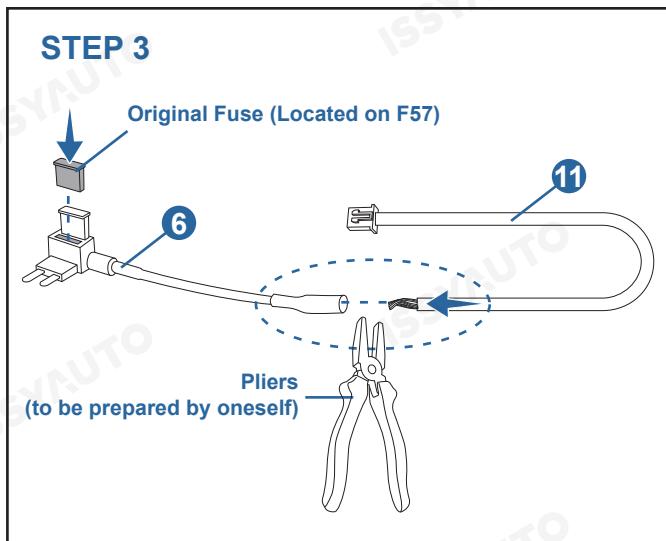


**STEP 3:** Insert the original fuse into [6] as shown in the diagram, connect [6] and [11], and clamp the joint with pliers.

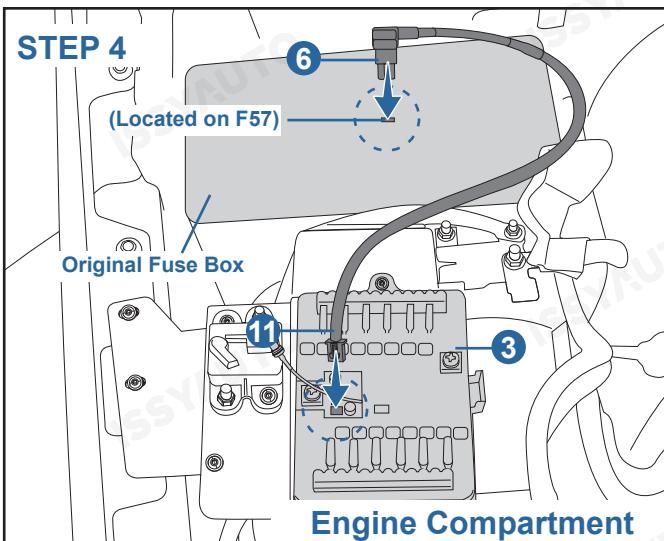


**STEP 4:** Insert [6] into the hole located at F57 and insert [11] into the indicated position of [3] as shown in the diagram.

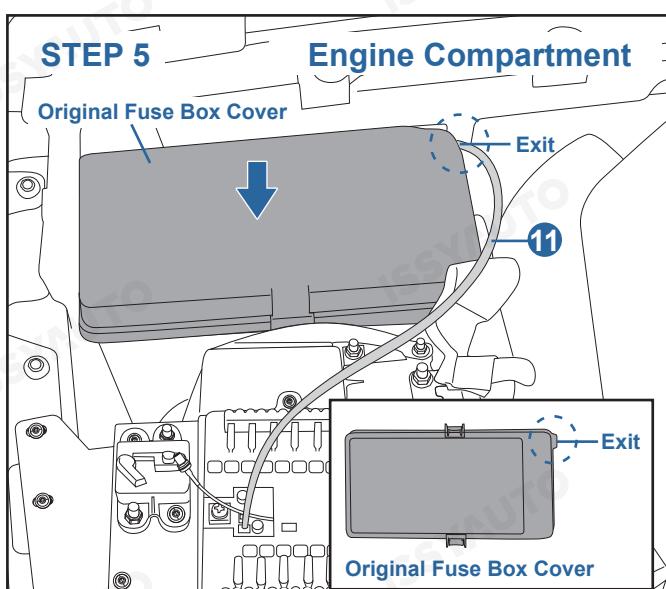


**STEP 5:** Cover the original fuse box with its cover, making sure that [11] passes through the designated position (to avoid pressing on the wire harness).

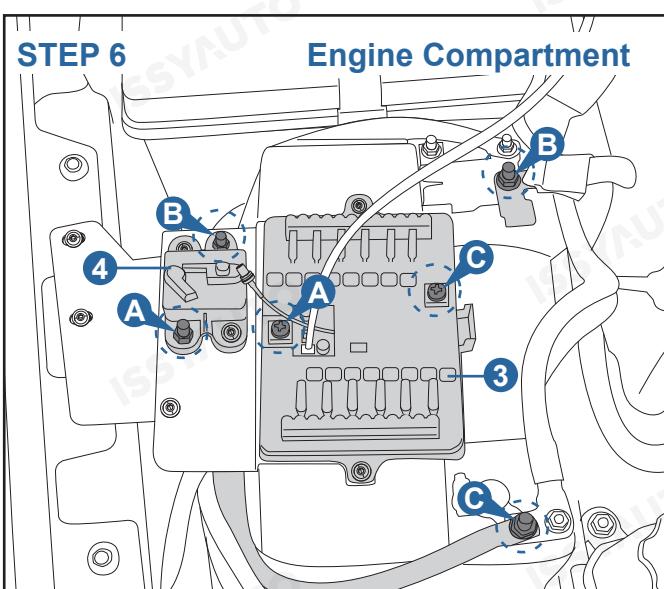


**STEP 6:** The connection points for [8], [9], and [10] are indicated by [A], [B], and [C] respectively ([8] connects to [A], [9] connects to [B], and [10] connects to [C]).

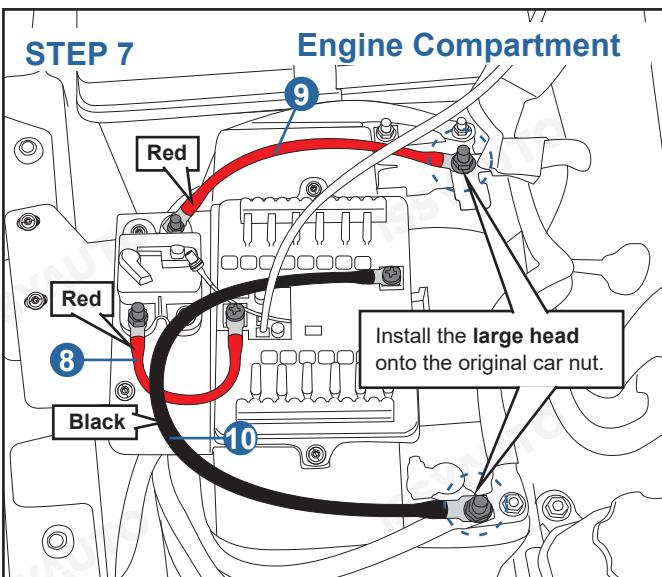


**STEP 7:** Connect [8] to [A], [9] to [B], and [10] to [C].

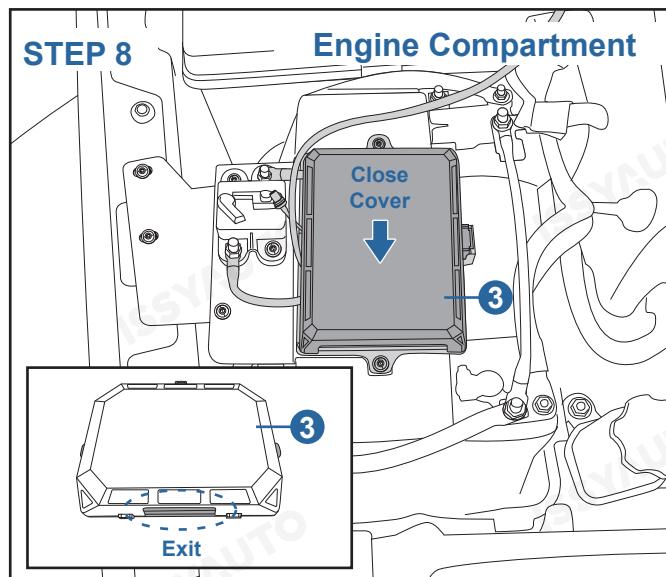


**STEP 8:** Pull all the wire harnesses on [3] to the outlet on the cover of [3], and then close the cover.

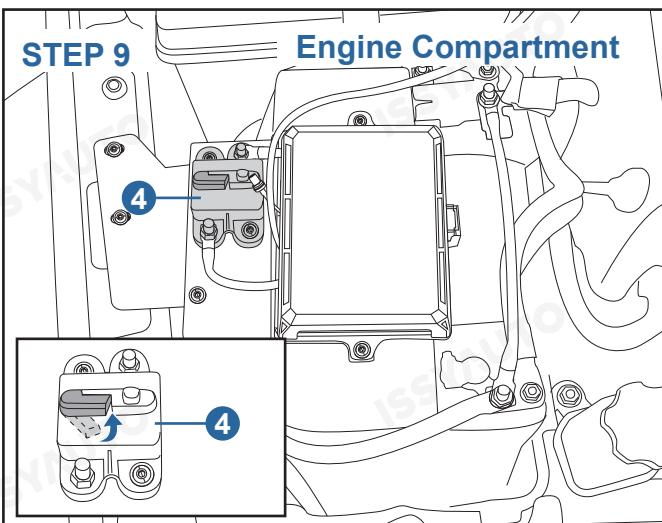

**STEP 9:** Press the button on [4] to power on.

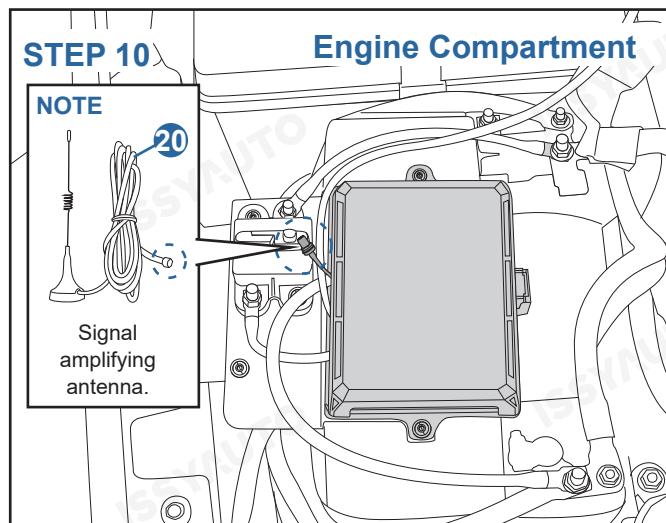


**STEP 10:** Wiring is complete.

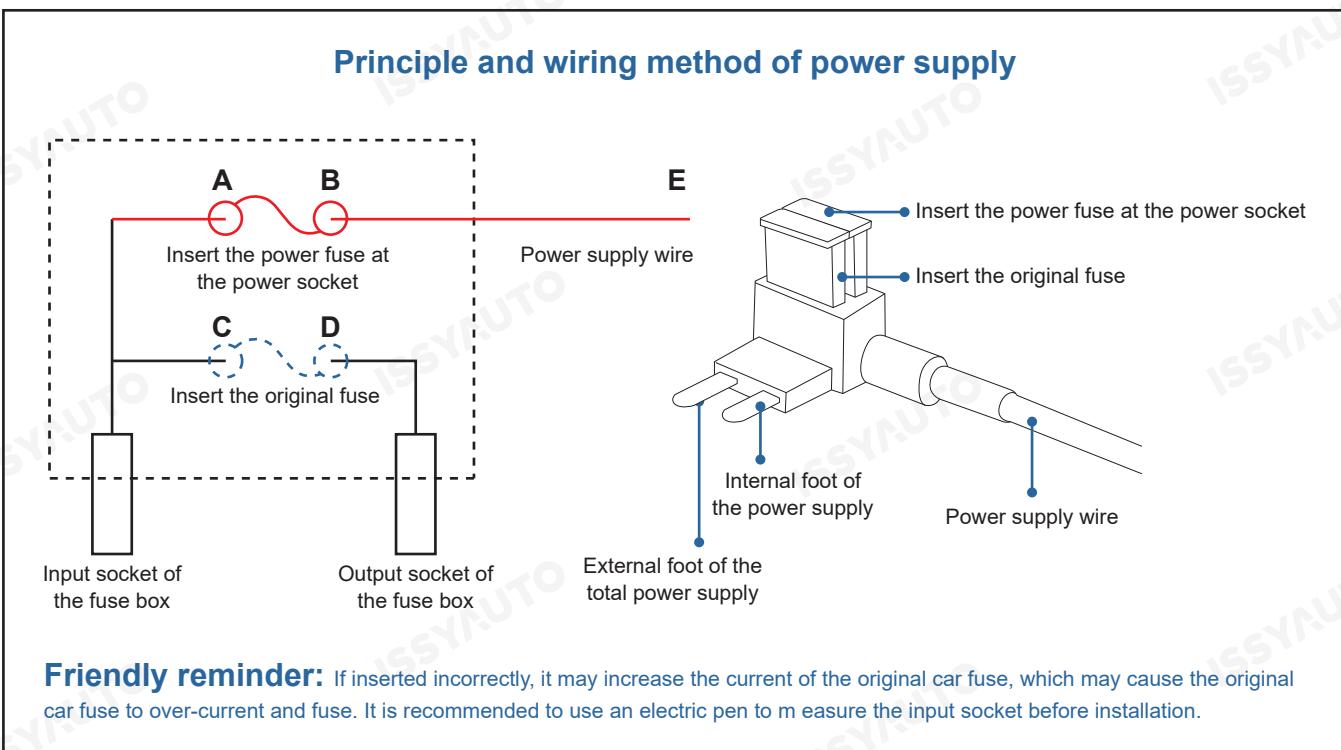


## ✓ BRACKET INSTALLATION OF SWITCH BUTTON

**Tip** Find the illustrated accessories in the spare products.




1 Spare Bracket

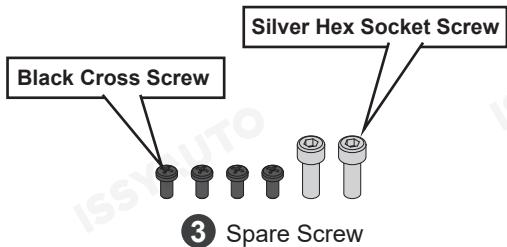


3 Spare Screw

### Way 1

#### Horizontal Plane

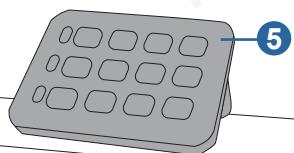


#### Vertical Plane

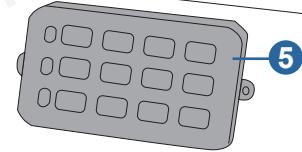

### Way 1


#### STEP 1

Use 4 black cross screws.

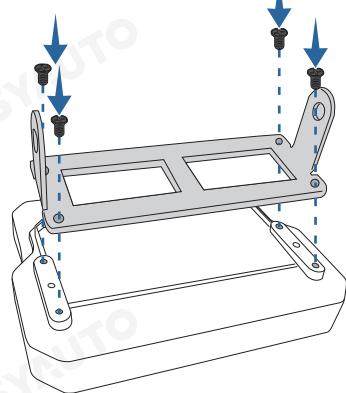


#### STEP 2

Use 2 silver hex socket screws.

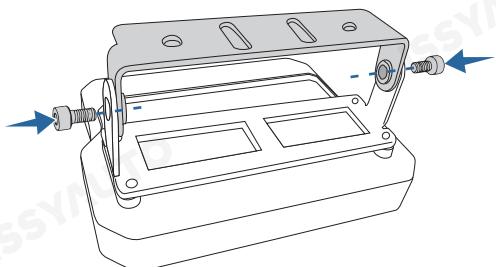

#### STEP 3


Install [11] onto the horizontal plane inside the car using screws or adhesive.

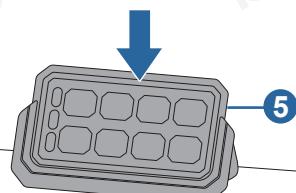

### Way 2


#### STEP 1

Use 2 black cross screws.

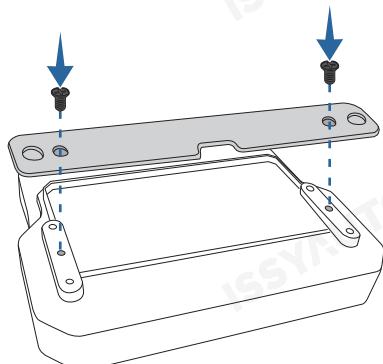

#### STEP 2

Install [11] onto the vertical plane inside the car using screws or adhesive.

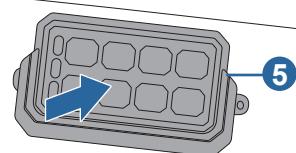

## ✓ FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**Warning:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## ✓ FCC RADIATION EXPOSURE STATEMENT

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body

If you have any questions, please visit Joytutus website or email for quick response.

Web: [www.joytutus.com](http://www.joytutus.com)

Email: [Service@joytutus.com](mailto:Service@joytutus.com)

