



Duty Cycle

Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5180	2.088	2.176	95.96	0.18	0.48	0.27
NVNT	a	5200	2.088	2.174	96.04	0.18	0.48	0.26
NVNT	a	5240	2.088	2.176	95.96	0.18	0.48	0.27
NVNT	n20	5180	7.97	8.06	98.88	0.05	0.13	/
NVNT	n20	5200	7.97	8.06	98.88	0.05	0.13	/
NVNT	n20	5240	7.97	8.06	98.88	0.05	0.13	/
NVNT	n40	5190	7.96	8.04	99	0.04	0.13	/
NVNT	n40	5230	7.96	8.04	99	0.04	0.13	/


Duty Cycle NVNT a 5240MHz

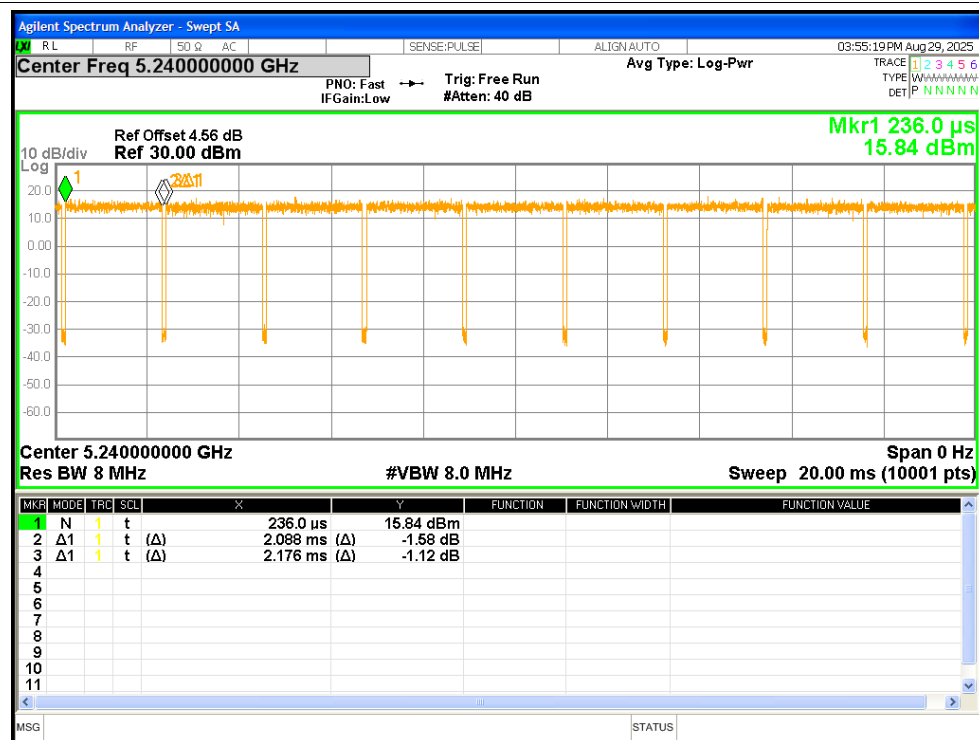


Duty Cycle NVNT n20 5180MHz


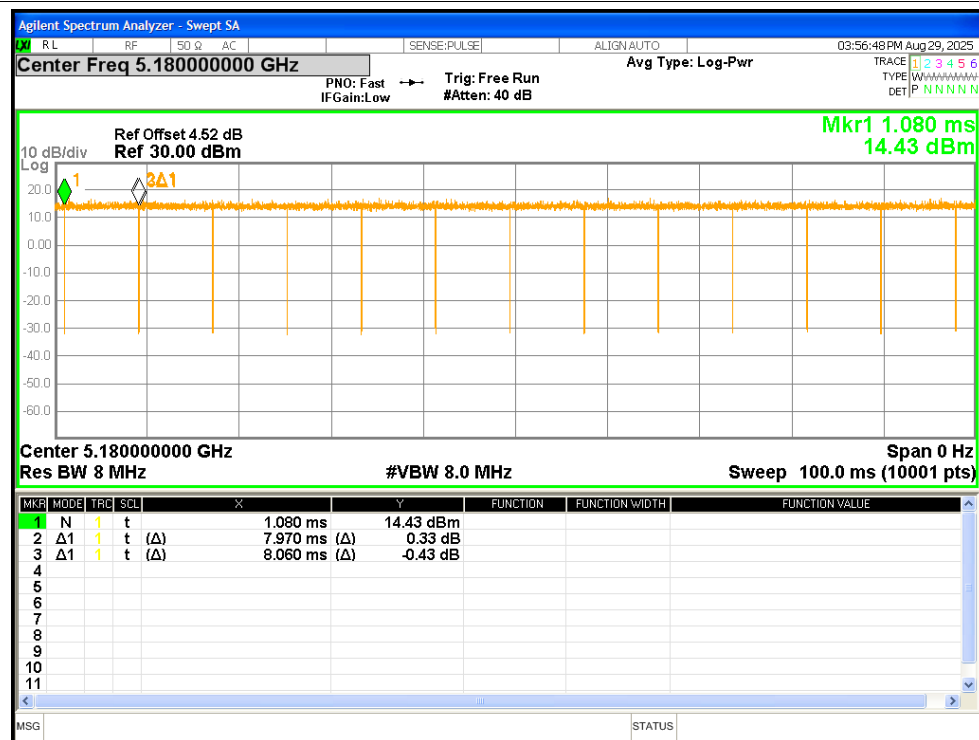


Duty Cycle NVNT n20 5200MHz

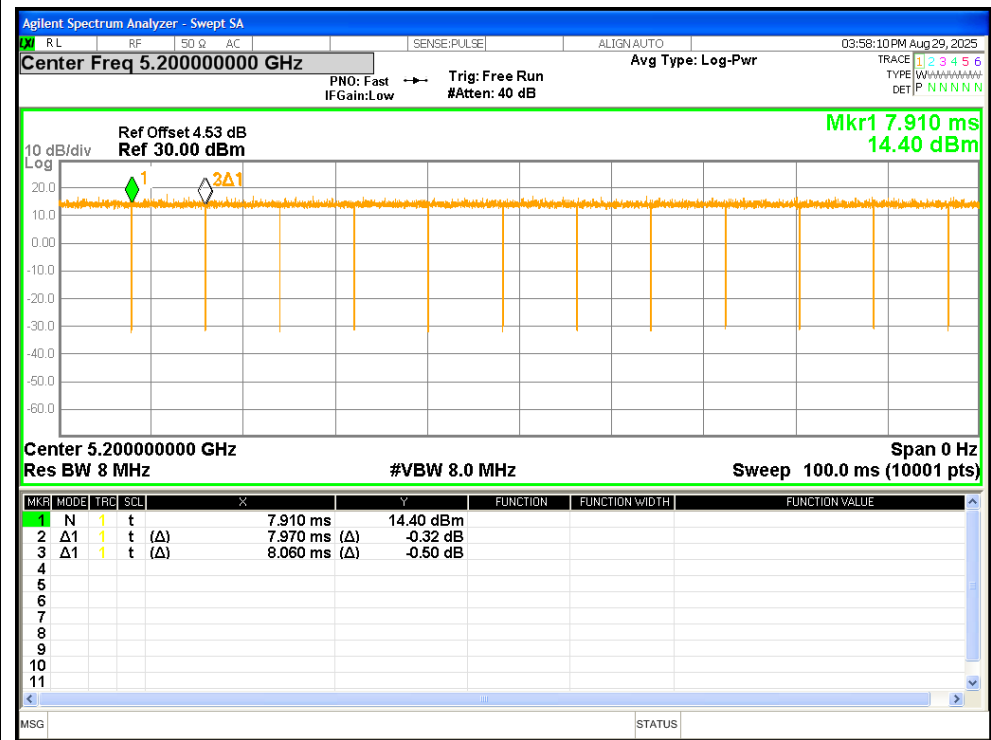



Duty Cycle NVNT n20 5240MHz


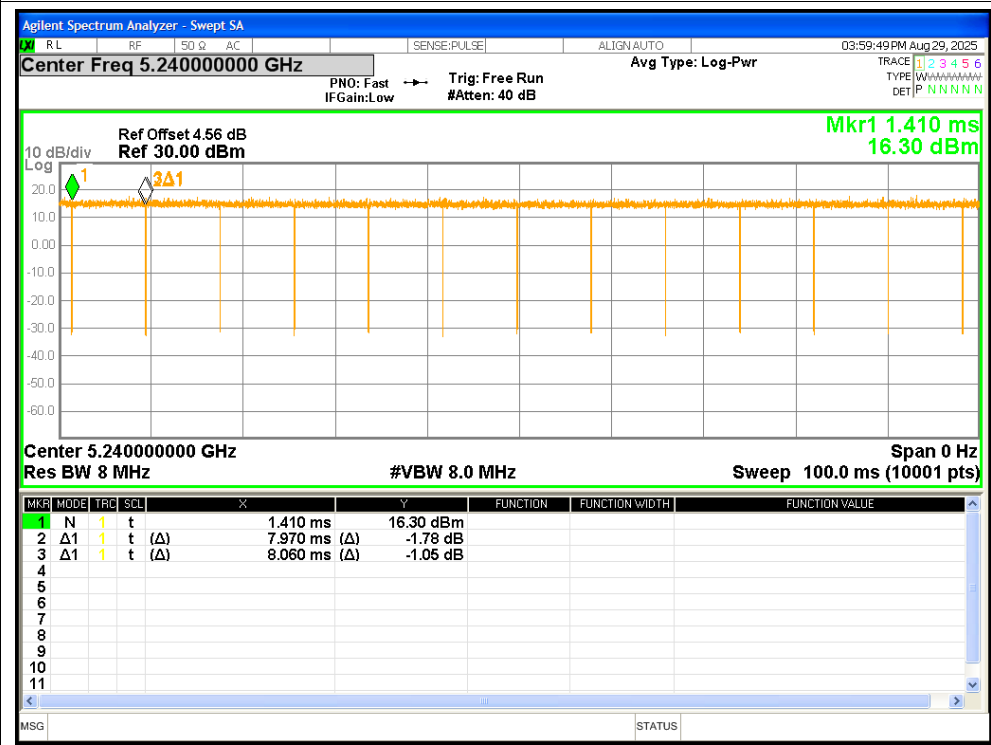


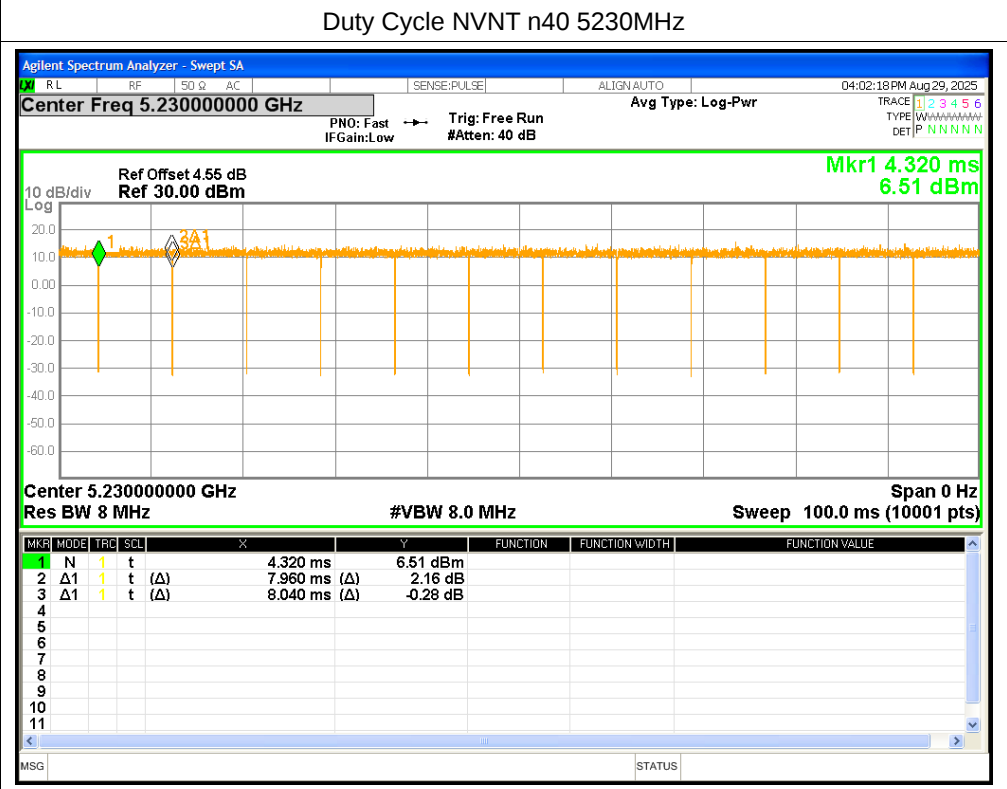
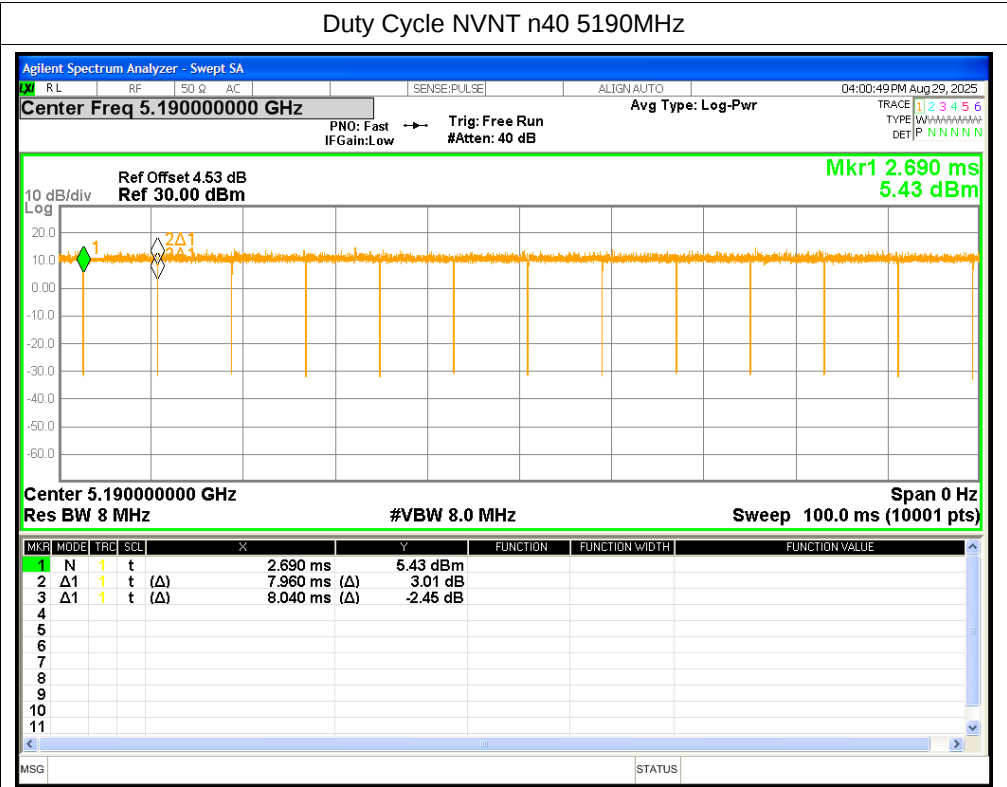




Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	10.86	10.86	<=24	Pass
NVNT	a	5200	10.95	10.95	<=24	Pass
NVNT	a	5240	11.84	11.84	<=24	Pass
NVNT	n20	5180	11.02	11.02	<=24	Pass
NVNT	n20	5200	11.13	11.13	<=24	Pass
NVNT	n20	5240	11.88	11.88	<=24	Pass
NVNT	n40	5190	11.43	11.43	<=24	Pass
NVNT	n40	5230	11.99	11.99	<=24	Pass

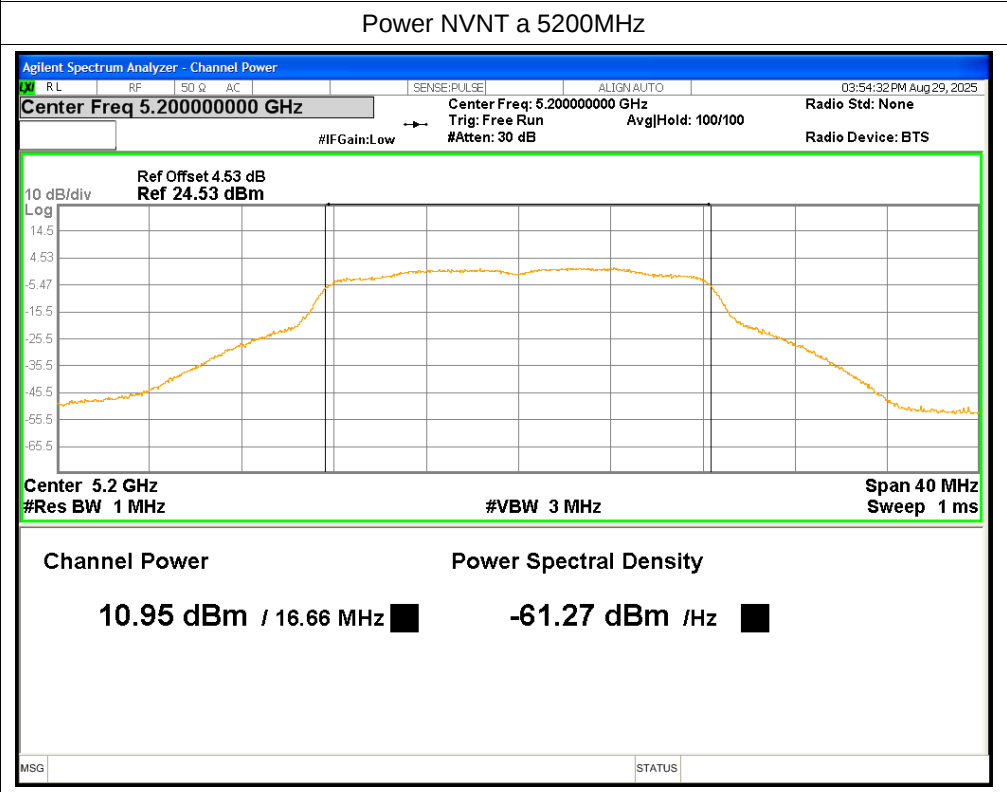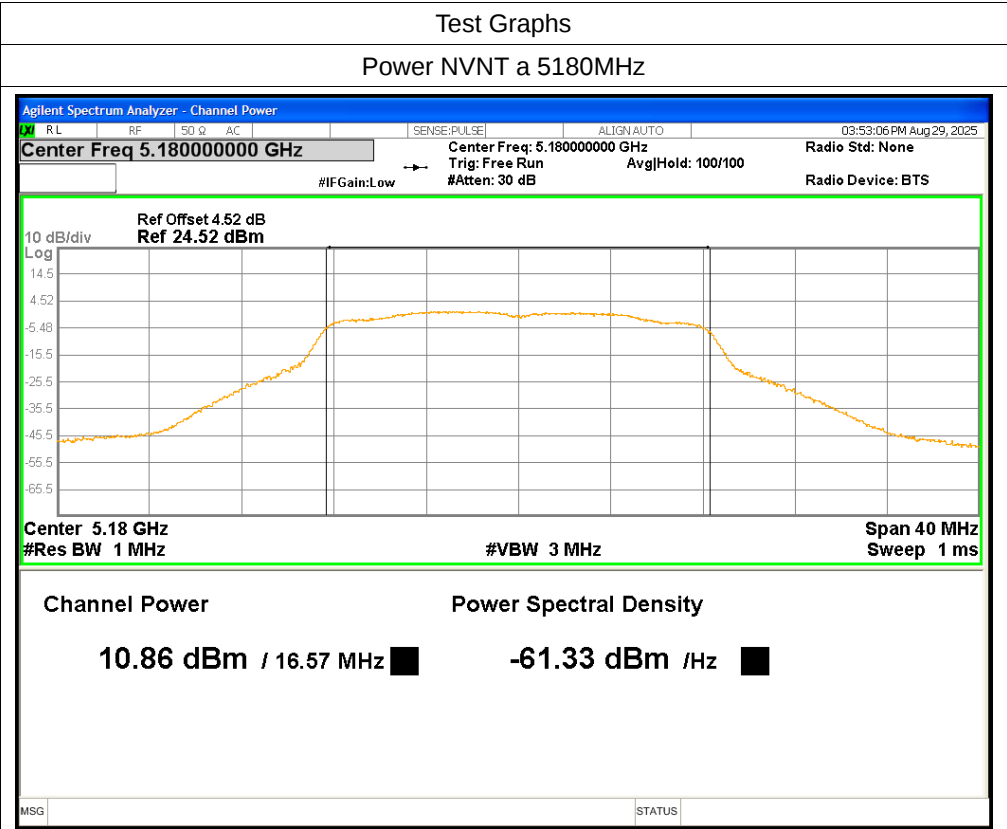

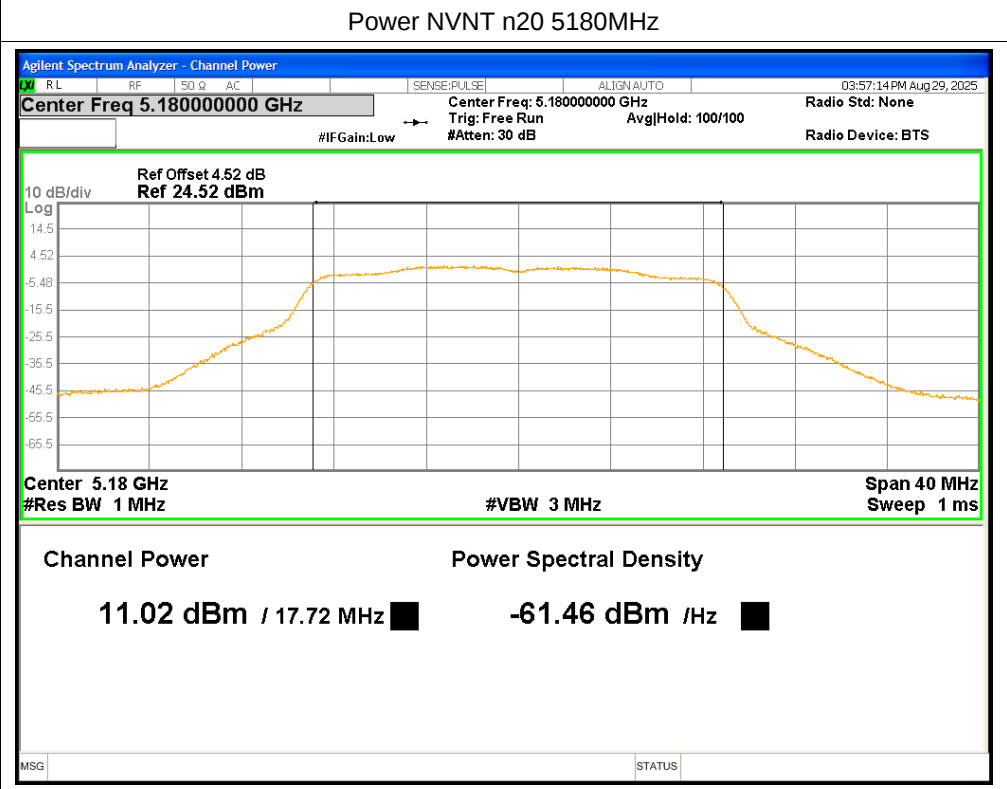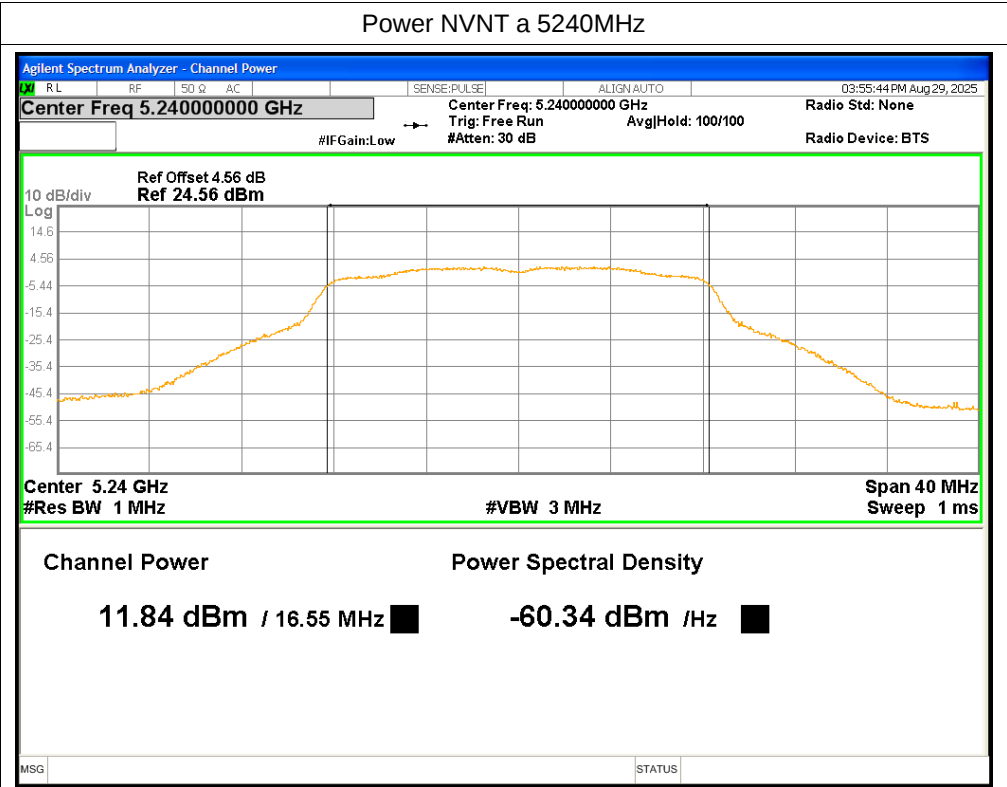

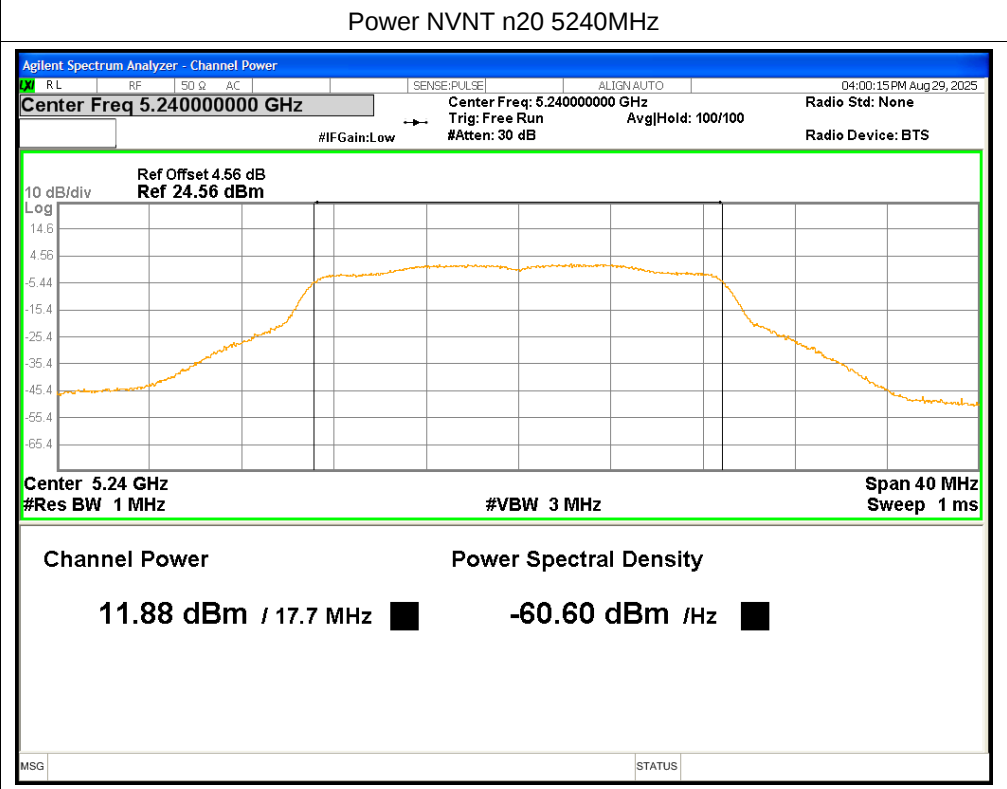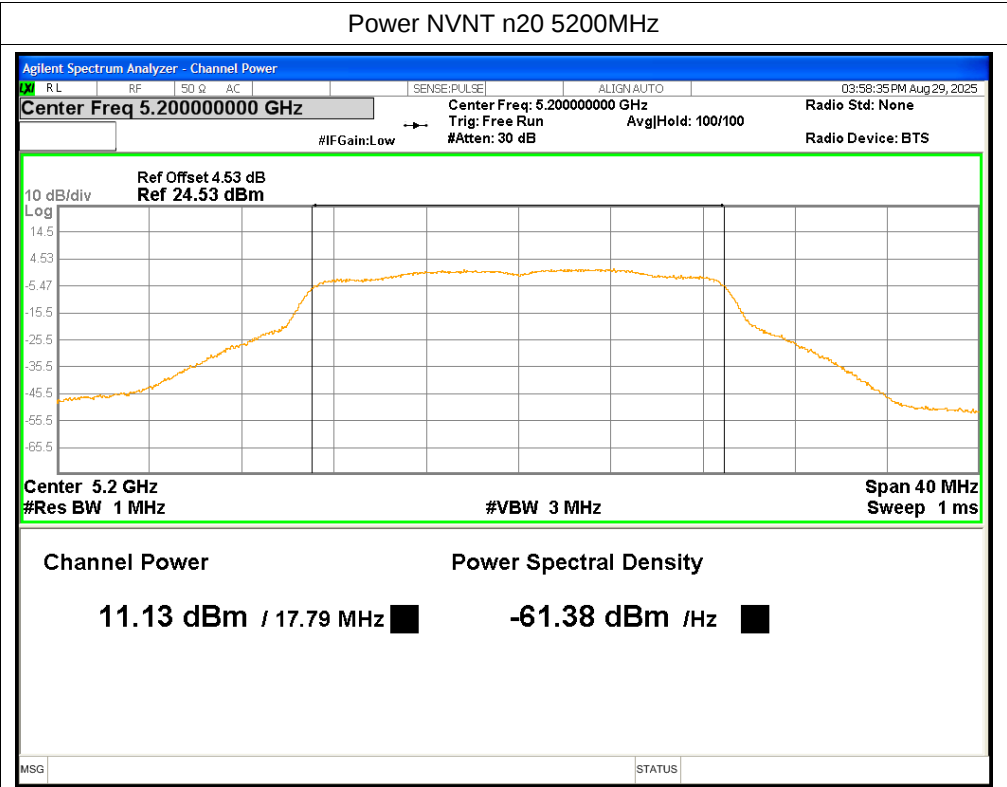

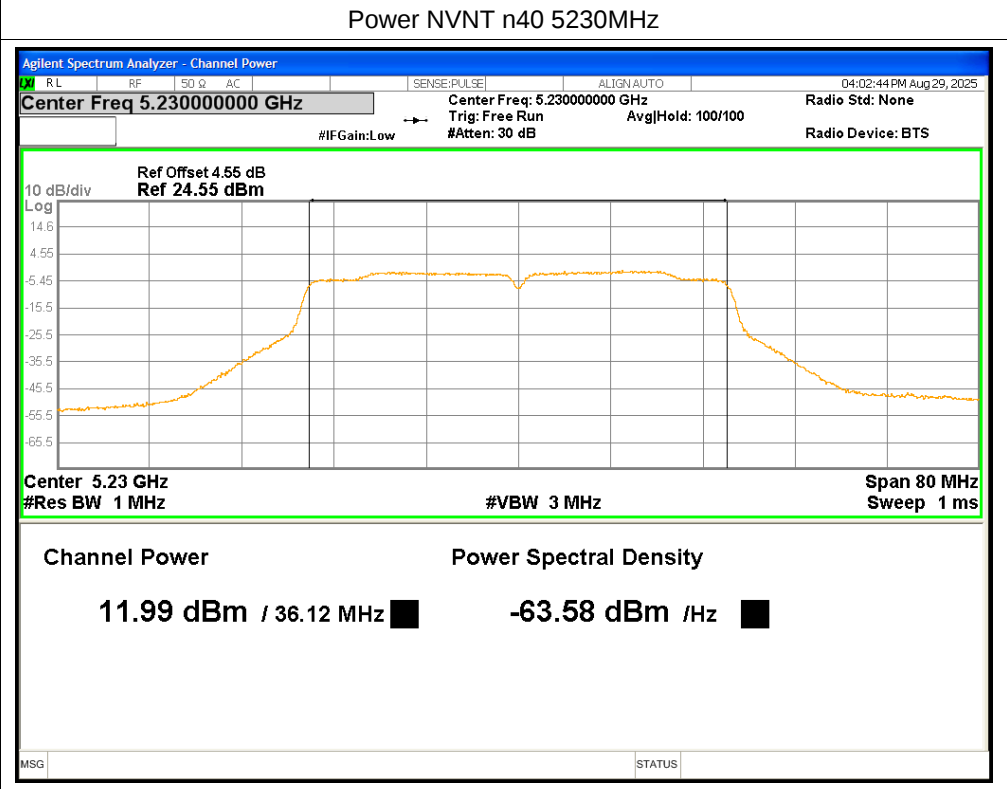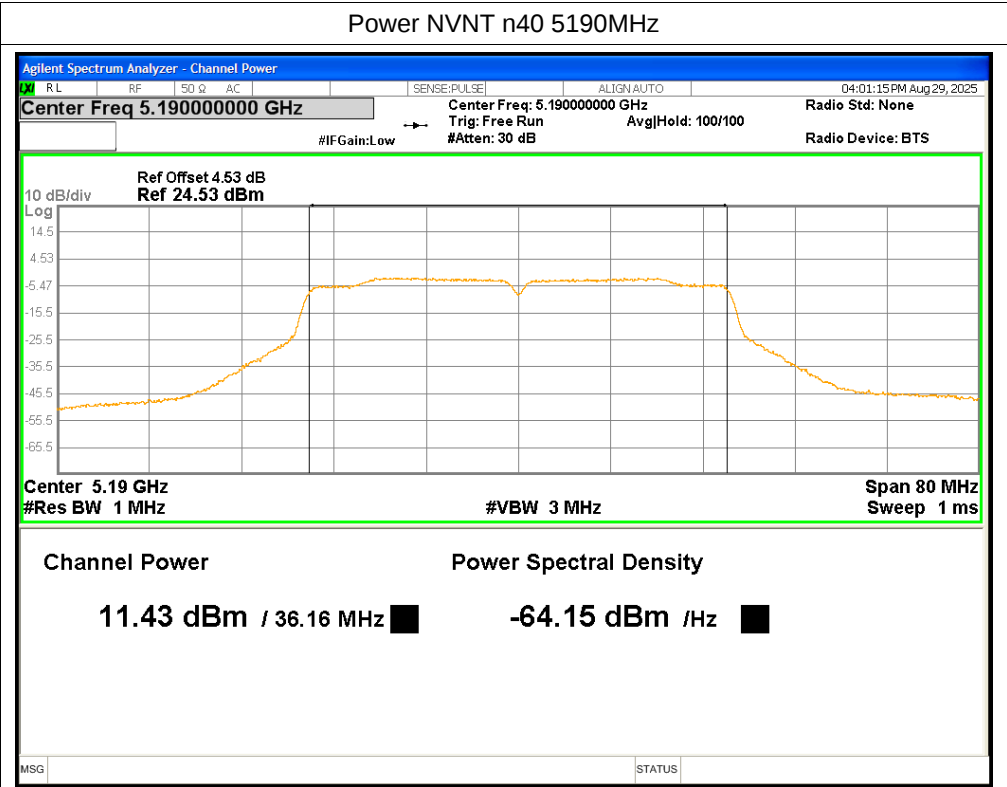


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	22.92	Pass
NVNT	a	5200	23.17	Pass
NVNT	a	5240	23.52	Pass
NVNT	n20	5180	23.57	Pass
NVNT	n20	5200	24.08	Pass
NVNT	n20	5240	23.48	Pass
NVNT	n40	5190	43.52	Pass
NVNT	n40	5230	42.68	Pass

Test Graphs


-26dB Bandwidth NVNT a 5180MHz

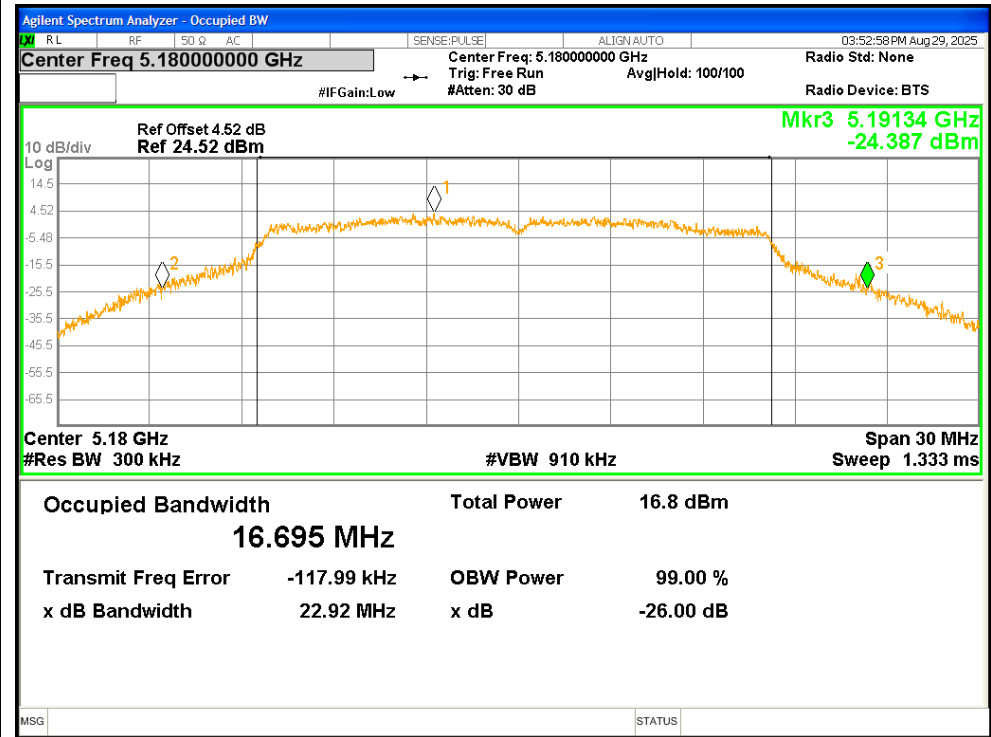


-26dB Bandwidth NVNT a 5200MHz


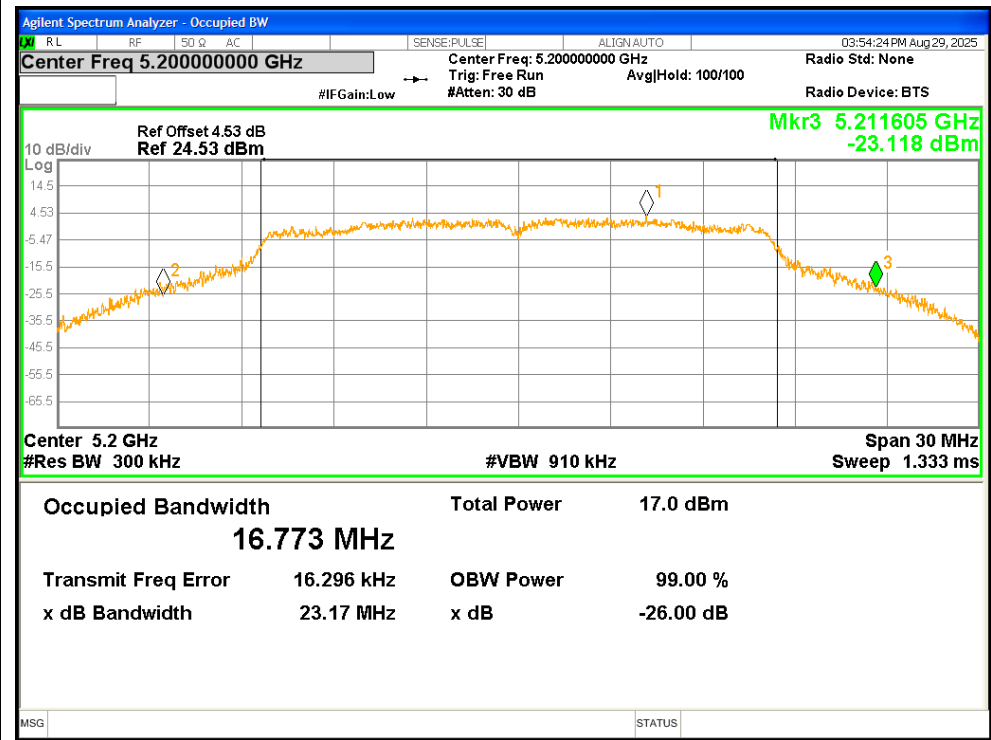


-26dB Bandwidth NVNT a 5240MHz

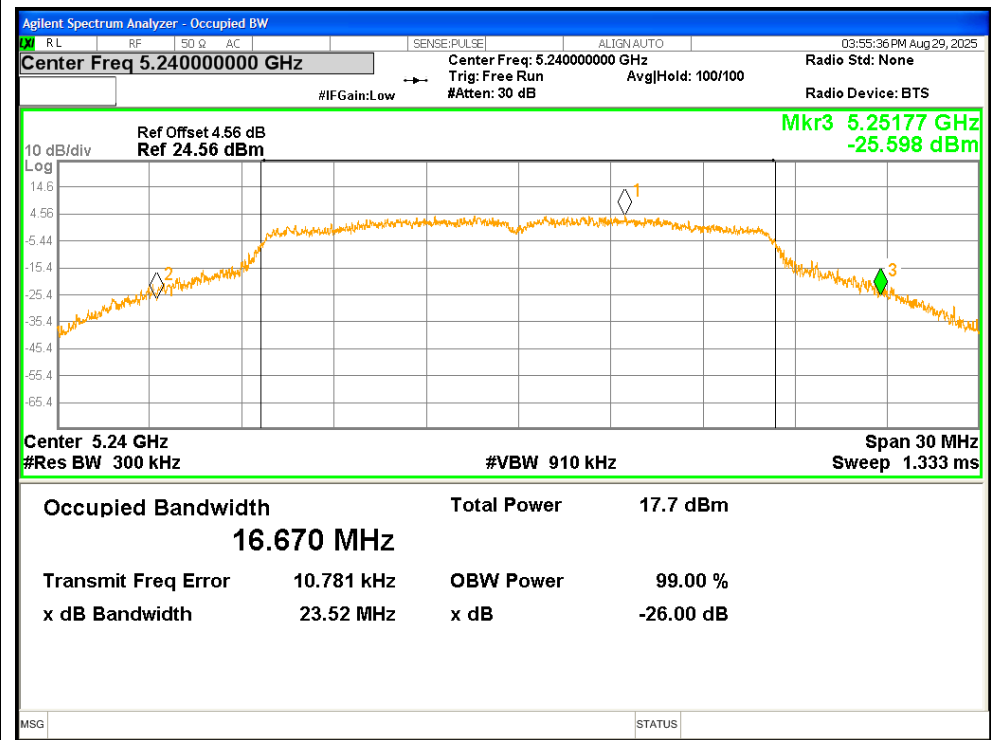


-26dB Bandwidth NVNT n20 5180MHz

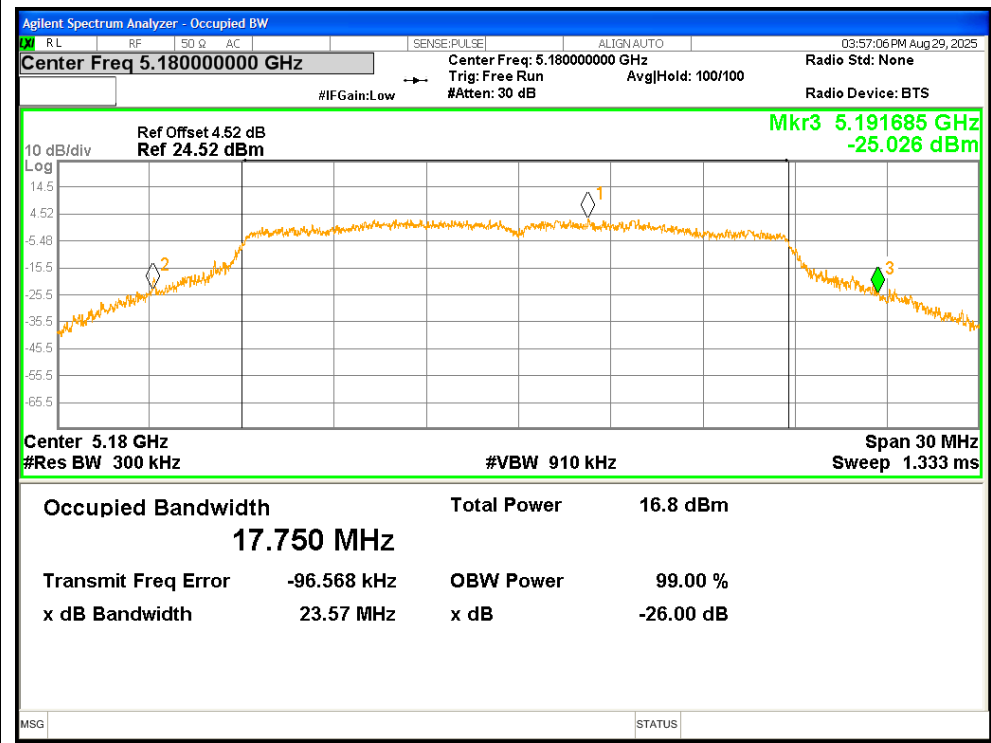


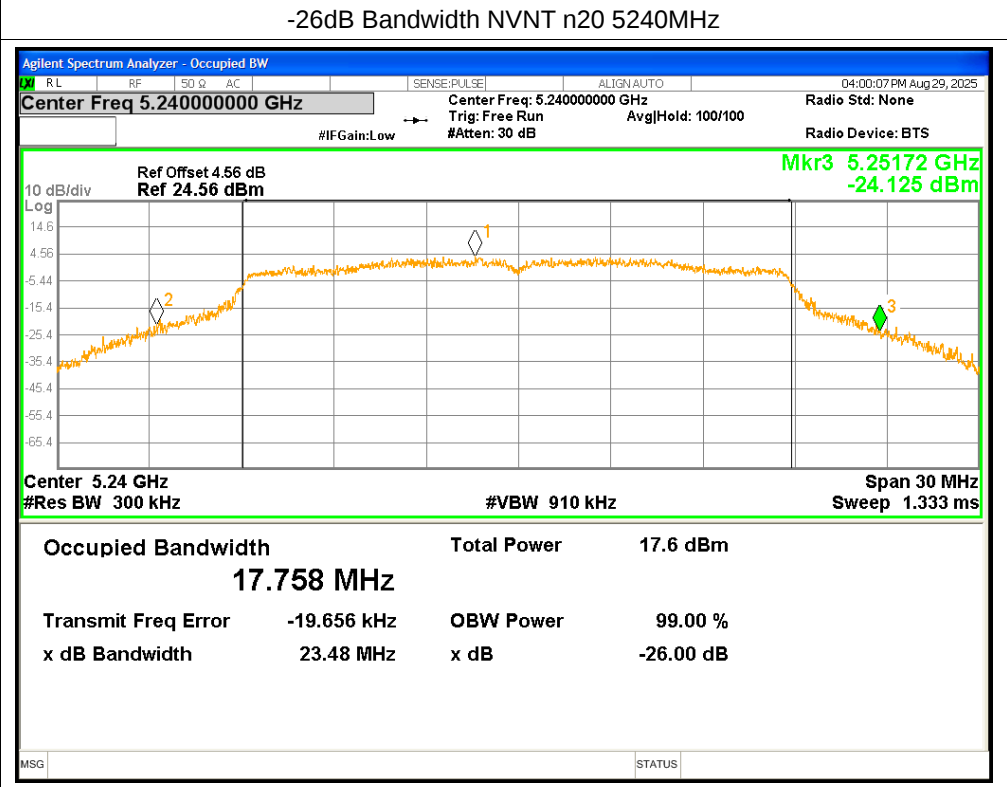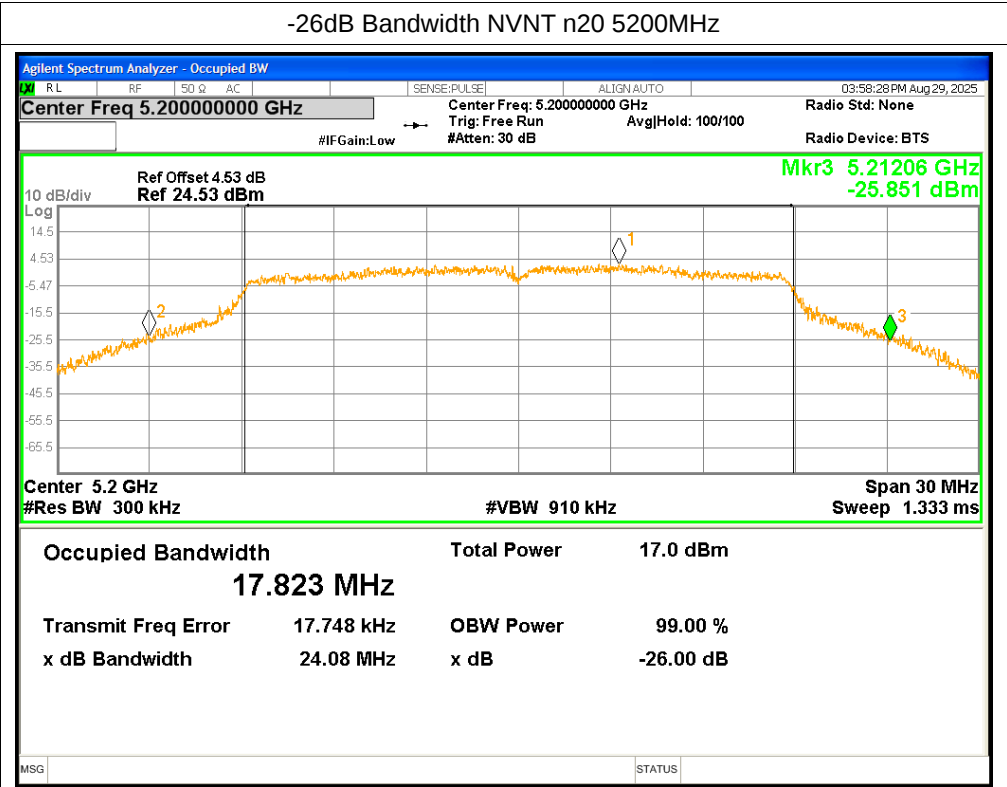

-26dB Bandwidth NVNT n40 5190MHz


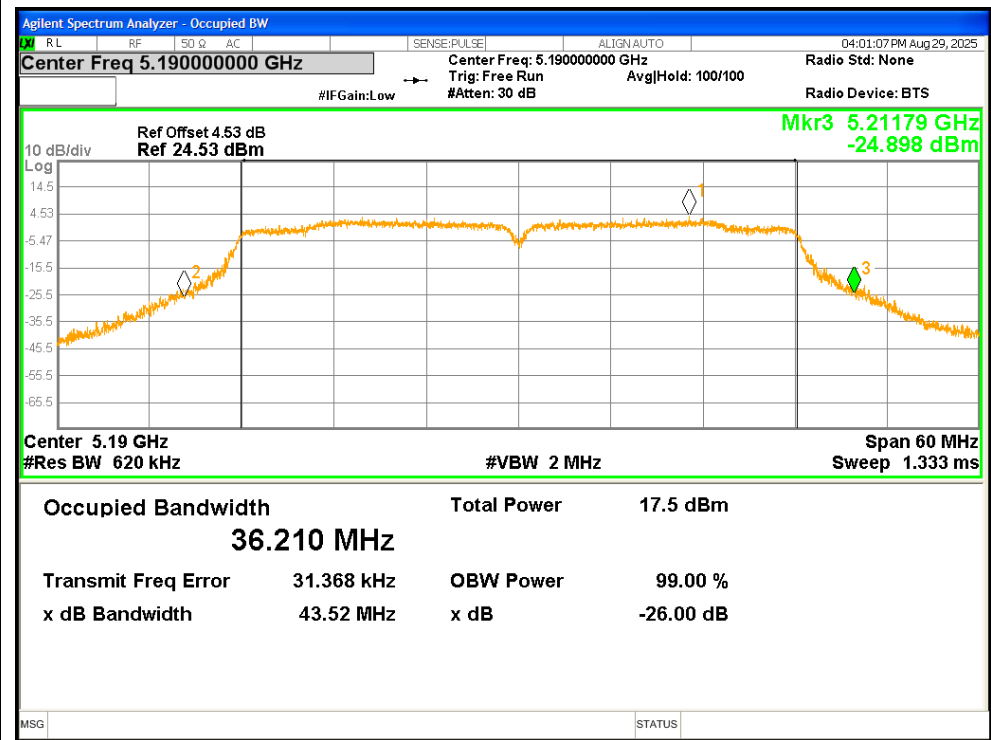




-26dB Bandwidth NVNT n40 5230MHz


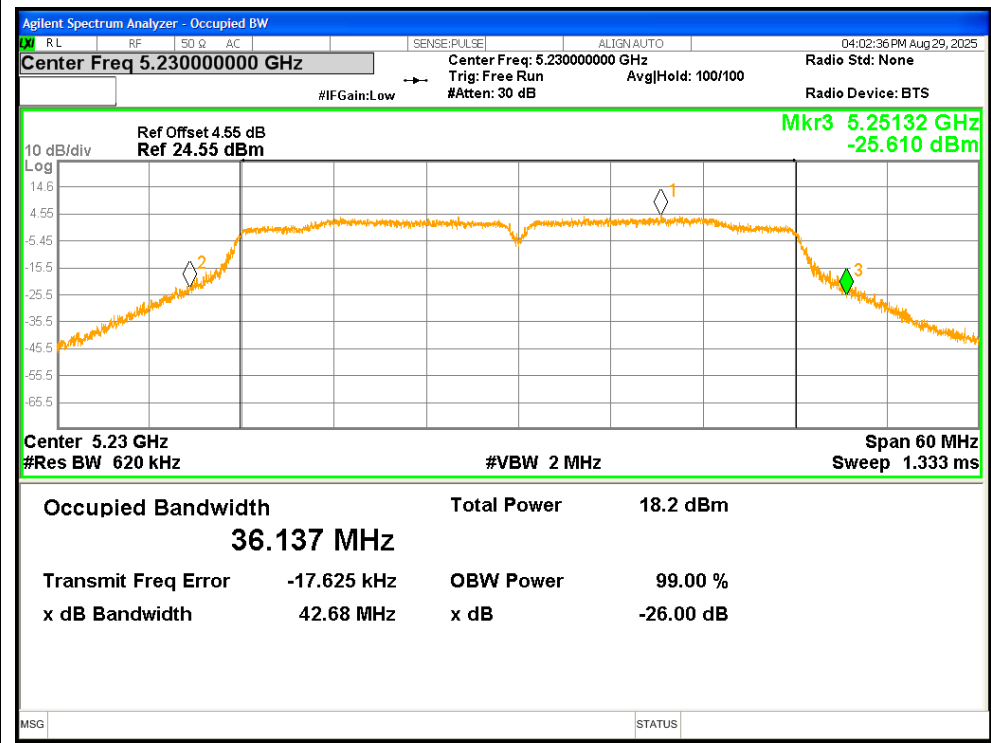




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.573
NVNT	a	5200	16.661
NVNT	a	5240	16.549
NVNT	n20	5180	17.72
NVNT	n20	5200	17.789
NVNT	n20	5240	17.696
NVNT	n40	5190	36.164
NVNT	n40	5230	36.116

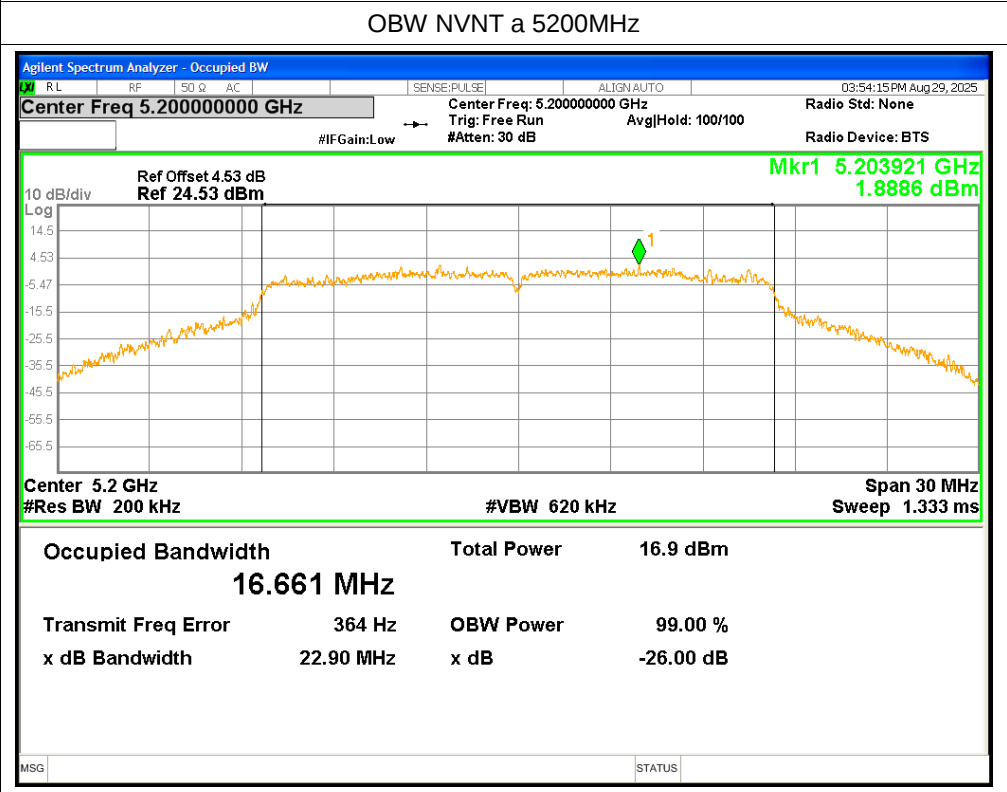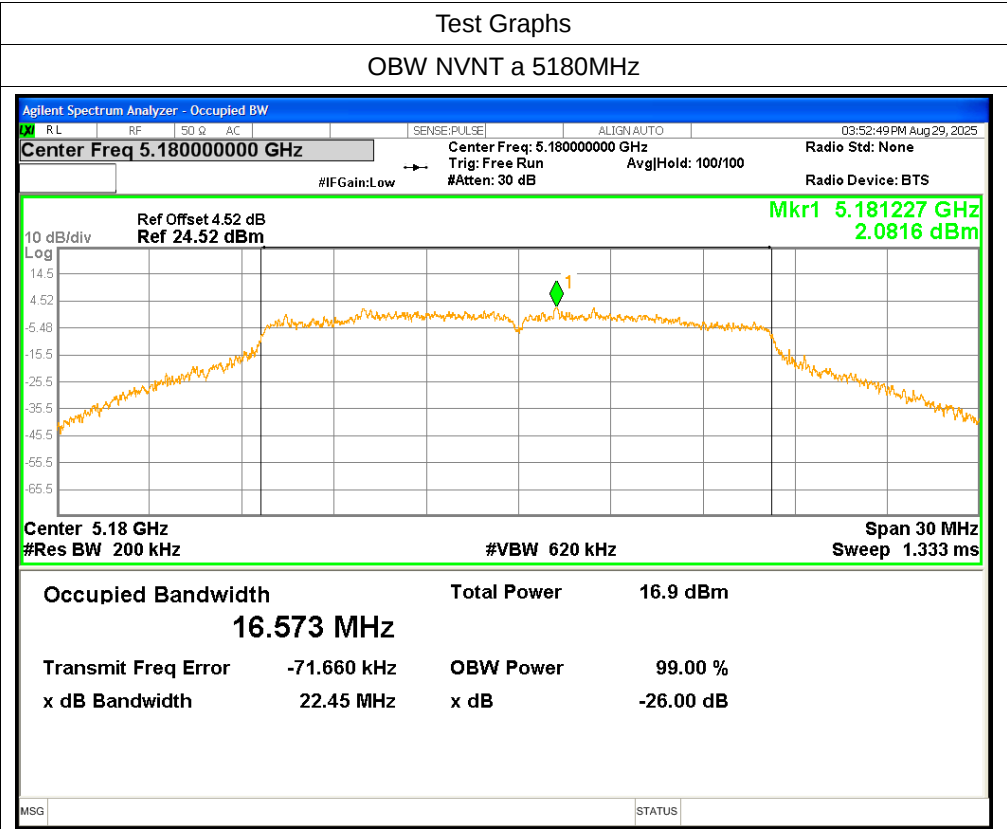

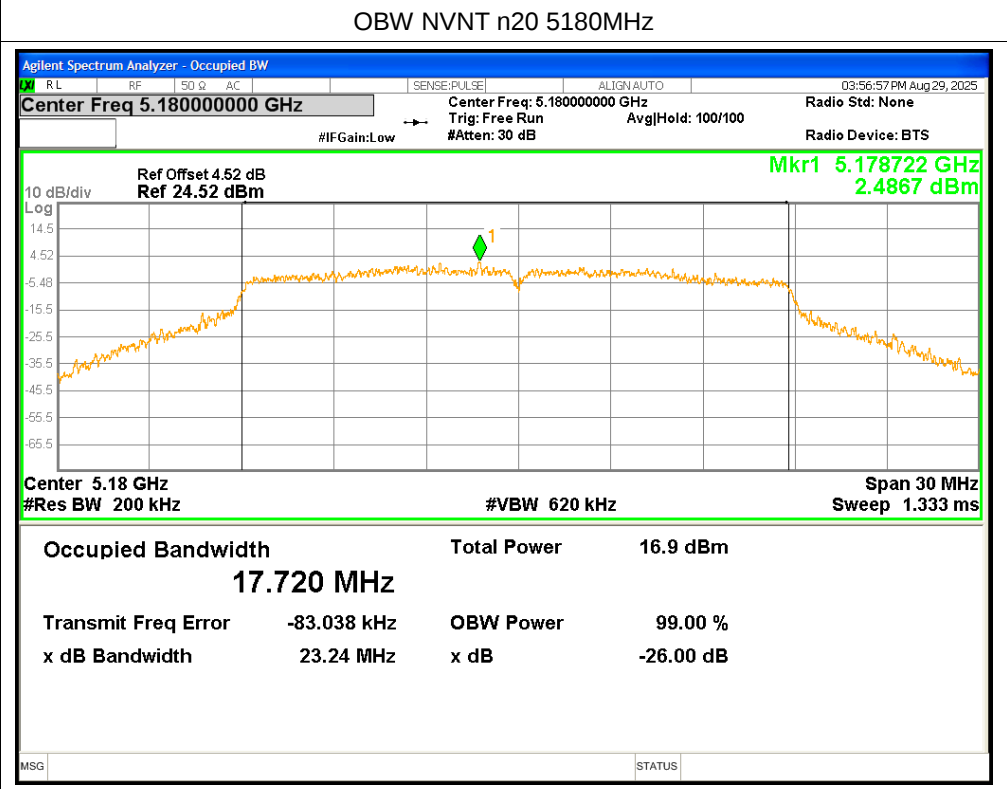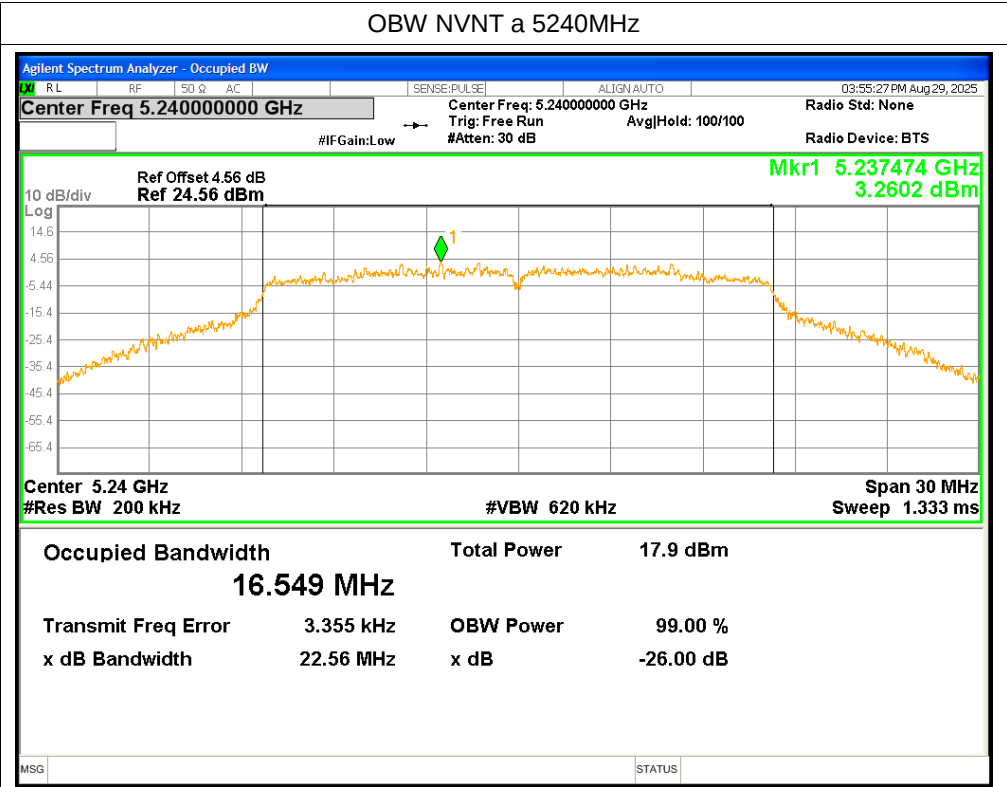

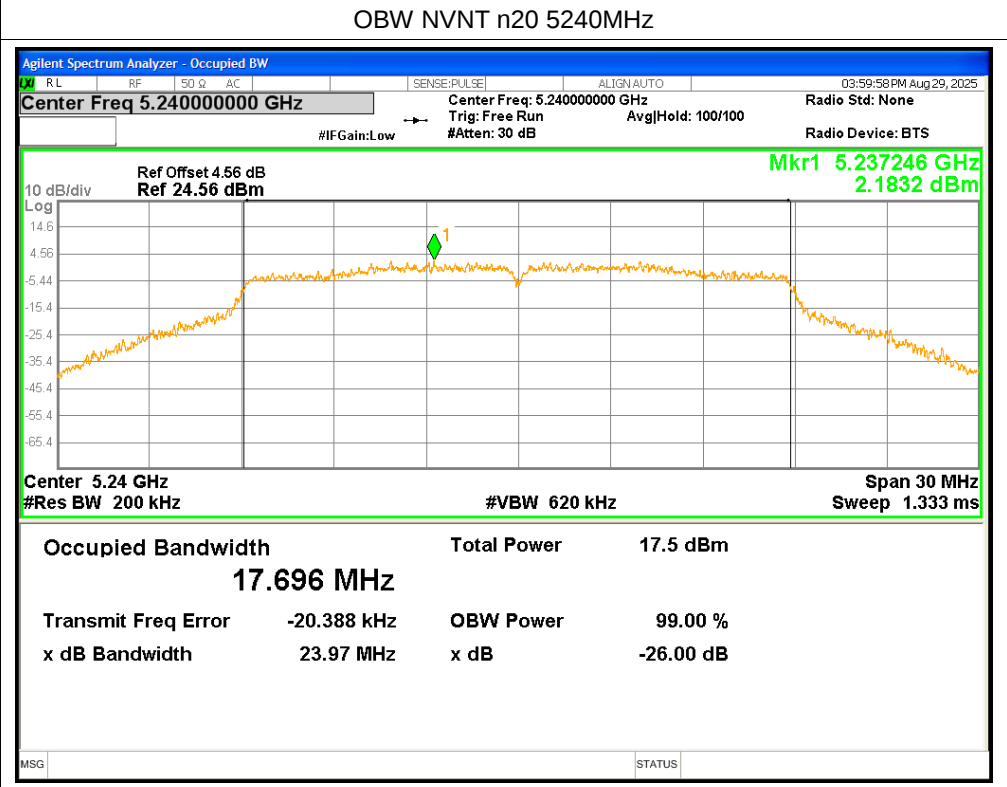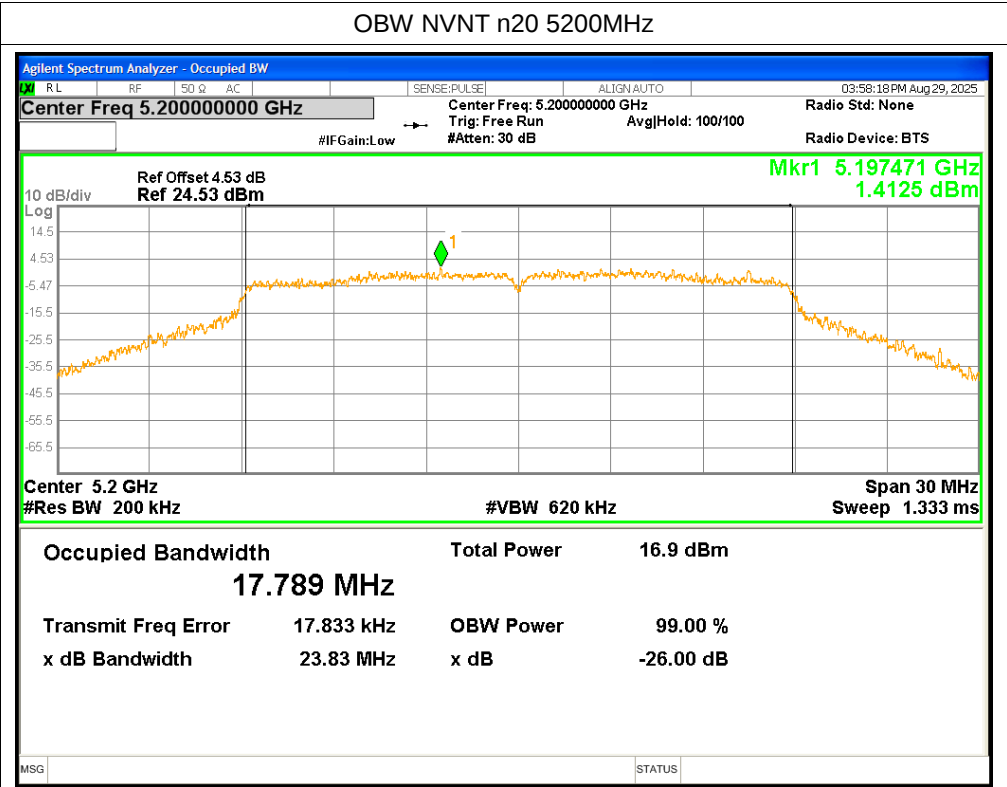

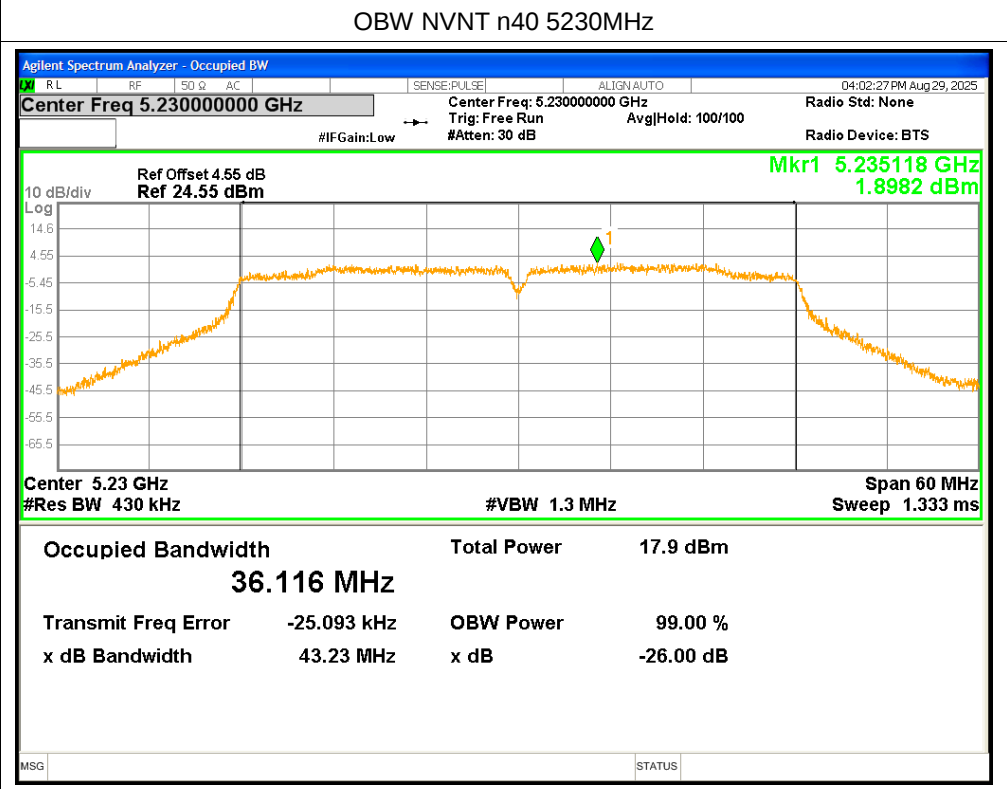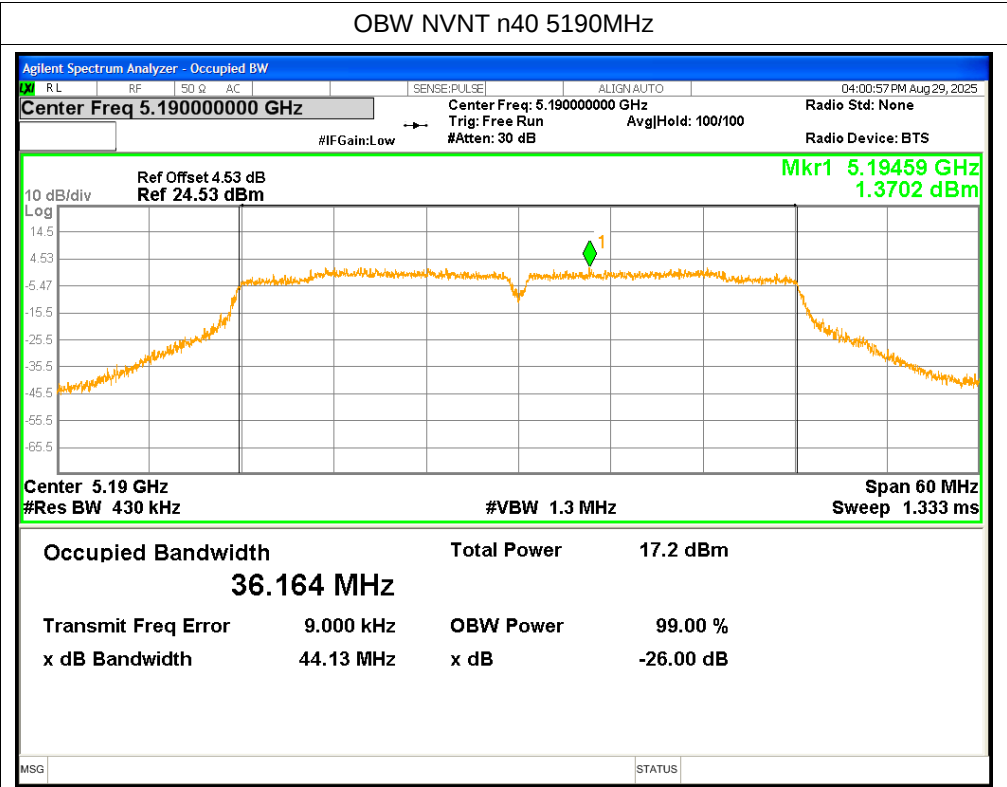


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	1.51	1.69	<=11	Pass
NVNT	a	5200	1.615	1.795	<=11	Pass
NVNT	a	5240	2.088	2.268	<=11	Pass
NVNT	n20	5180	1.155	1.155	<=11	Pass
NVNT	n20	5200	1.358	1.358	<=11	Pass
NVNT	n20	5240	1.94	1.94	<=11	Pass
NVNT	n40	5190	-1.756	-1.756	<=11	Pass
NVNT	n40	5230	-1.24	-1.24	<=11	Pass

Test Graphs

PSD NVNT a 5180MHz

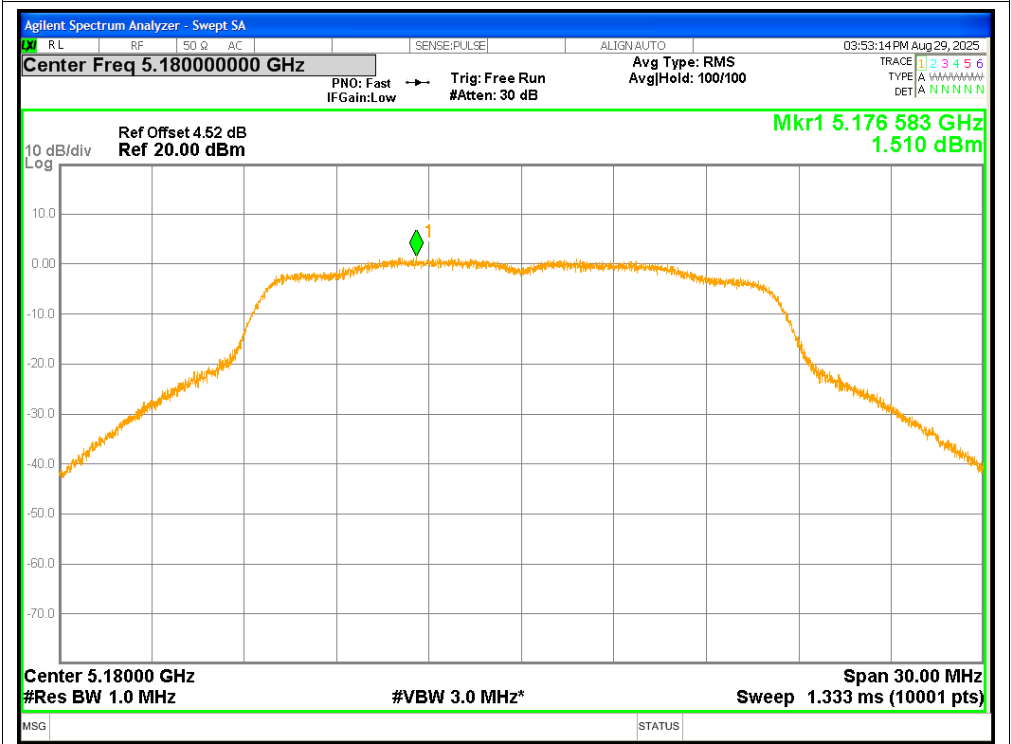

PSD NVNT a 5200MHz

