

承 認 書

SPECIFICATION FOR APPROVAL

客 戶:
CUSTOMER: Guangdong Vebest Supply Chain Management Co., Ltd

客 戶 料 號:
CUST P/N: /

音 澤 料 號:
FINE P/N: G43.5*0.8-20.5-0.08*48P-10TS*6.5UH-L20MM+BJ

產 品 型 號:
DESC: Φ 43.5MMX0.8MM

日 期:
DATE: 2023/07/17

版 本:
Version: A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成 He li cheng	马莉 Ma li	但可清 Dan ke qing	

Manufacturer:Guangdong Vebest Supply Chain Management Co., Ltd
Address:RoomE405,EZone,4F,ManSumInformationTechnology&SciencePark, No.8,EasternJinsanRd.
,SanjiaoTown,ZhongshanCity,Guangdong Province,ChinaRoom; 101,BuildingASanXinRoad126,
SanJiaoTown, ZhongshanCity GuangdongProvince

Only radiated measurements are used to show compliance with FCC limits for fundamental and spurious emissions.


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	G43.5*0.8-20.5-*0.08*48P-10 TS*6.5UH-L20MM+BJ	版本 Rev: A.0	客戶 CUST:	Guangdong Vebest Supply Chain Management Co., Ltd
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

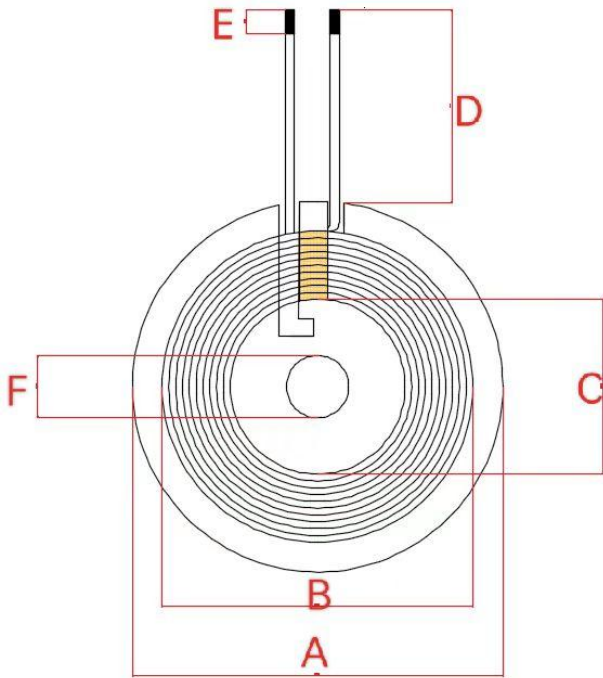

A	43.5±0.3
B	38.5±0.5
C	20.5±0.5
D	20 ±2
E	3±2
F	5.3±0.2
G	
H	
I	
K	

注Note:
1.交叉出线Cross outgoing line;
2.线圈贴双槽磁片，磁片尺寸Double slot magnetic disc for coil mounting, magnetic disc size 43.5±0.5mm., 厚度为The thickness is 0.8±0.05mm.
3.磁片背面贴背胶Stick adhesive on the back of the magnetic disc

二、原理图 SCHEMATIC DIAGRAM:

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	丝包线 0.08*48P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5H ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤100m Ω		LCZ METER 502B

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
何立成 He li cheng2023.07.17	马莉 Ma li