

TEST REPORT

For

Thermal Camera

Model Number: TIMNBLH650 LRF, TIMNBLH635 LRF, TIMNBLH335 LRF, TIMNBLH335, TIMNBLH635

FCC ID: 2BGKL-TIMNBLH

Test Laboratory	:	Shenzhen Academy of Metrology and Quality Inspection
Site Location	:	No.4, Tongfa Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Tel	:	0086-755-86928965
Fax	:	0086-755-86009898-31396
Web	:	www.smq.com.cn
Email	:	emcrf@smq.com.cn

The "important statement" on the back of report's homepage is an element of the report, and any copy that does not contain the "important statement" is incomplete.

Revision History


No	Date	Remark
V1.0	2025-4-21	Initial issue


TEST REPORT DECLARATION

Applicant : Hangzhou Shunli Optotech Co., Ltd.
Address : 3rd Floor, Building 2, NO.526, Binkang Road, Binjiang District, Hangzhou City, China
Manufacturer : Hangzhou Shunli Optotech Co., Ltd.
Address : 3rd Floor, Building 2, NO.526, Binkang Road, Binjiang District, Hangzhou City, China
EUT Description : Thermal Camera
Model No. : TIMNBLH650 LRF, TIMNBLH635 LRF, TIMNBLH335 LRF, TIMNBLH335, TIMNBLH635
Trade mark : EMDI
Serial Number : -----
Date of EUT : 2024-11-6
Receive
Test Standards: : FCC Part 15 Subpart B

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results, unless they depend on the manufacturer information.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer: 
(周芳媛 Zhou FangAi) Date: 2025-4-8

Checked by: 
(万晓婧 Wan XiaoJing) Date: 2025-4-21

Approved by: 
(林斌 Lin Bin) Date: 2025-4-21

TABLE OF CONTENTS

TEST REPORT DECLARATION	3
1 Test Results Summary	5
2 General Information	6
2.1 Report Information	6
2.2 Laboratory Accreditation and Relationship to Customer	6
2.3 Measurement Uncertainty	7
3 PRODUCT DESCRIPTION	8
3.1 EUT Description	8
3.2 Block Diagram of EUT Configuration	8
3.3 Operating Condition of EUT	8
3.4 Support Equipment List	9
3.5 Test Conditions	9
3.6 Modifications	9
4 CONDUCTED EMISSION TEST	10
4.1 Test Standard and Limit	10
4.2 Test Procedure	10
4.3 Test Arrangement	10
4.4 Test Setup	10
4.5 Test Equipment	11
4.6 Test Condition	11
4.7 Test Data	11
5 RADIATED EMISSION TEST	13
5.1 Test Standard and Limit	13
5.2 Test Procedure	14
5.3 Test Arrangement	14
5.4 Test Setup	14
5.5 Test Equipment	15
5.6 Test Condition	15
5.7 Test Data	15

1 Test Results Summary

Table 1 Test Results Summary

Test Items	Test Results
Conducted Emission	PASS
Radiated Emission	PASS

Remark: "N/A" means "Not applicable."

2 General Information

2.1 Report Information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

2.2 Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation numberCN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

2.3 Measurement Uncertainty

Conducted Emission for Mains

AMN

$U = 2u_c (V) = 3.74 \text{ dB } k = 2 \text{ (9 kHz - 150 kHz)}$

$U = 2u_c (V) = 3.34 \text{ dB } k = 2 \text{ (0.15 MHz - 30 MHz)}$

Radiated Emission

$U = 2u_c (E) = 4.26 \text{ dB } k = 2 \text{ (Below 1 GHz)}$

$U = 2u_c = 4.64 \text{ dB } k = 2 \text{ (1 GHz~6 GHz)}$

$U = 2u_c = 5.08 \text{ dB } k = 2 \text{ (6 GHz~40 GHz)}$

3 PRODUCT DESCRIPTION

NOTE: The extreme test conditions for temperature and antenna gain were declared by the manufacturer.

3.1 EUT Description

Operating voltage : 3.6 Vdc (Low)/3.8 Vdc (Normal)/4.2 Vdc (Max)

Test voltage : 120 Vac/60 Hz

Software Version : V2.631.0000000.0.R.250116

Hardware Version : 100_178

Frequency : 2.4G WiFi: 2412MHz~2462MHz

Type(s) of Modulation : DSSS (DBPSK, DQPSK, CCK) for 802.11b
OFDM (BPSK, QPSK, 16QAM, 64QAM) for 802.11g/n


Antenna Type : 2.4G WiFi: IFA -6.92 dBi

Remark: The product differences are as follows, and the others are the same.

Model	Resolution	Focal Length	Main Board	Laser Ranging Finder	Else	
TIMNBLH335 LRF	384×640	35mm	Same	1000m	Same	
TIMNBLH335				none		
TIMNBLH635 LRF		35mm		1000m		
TIMNBLH635				none		
TIMNBLH650 LRF		50mm		1000m		

Unless otherwise specified, the model TIMNBLH650 LRF was chosen as the representative model to perform all the tests.

3.2 Block Diagram of EUT Configuration

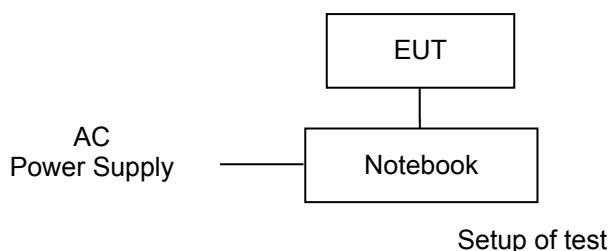

3.3 Operating Condition of EUT

Test mode 1: Connected to a pc and data transmission.

Test Mode 2: Charging

EUT has more than one typical operation, only the worst test mode will be recorded in this report.

The Radiated emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

3.4 Support Equipment List

Table 2 Support Equipment List

Name	Model No.	S/N	Manufacturer
Adapter	VCB3HDUH	---	Huizhou Golden Lake Industrial Co., Ltd.
Rechargeable Li-ion Polymer Battery for EUT	L018-40-B	---	Dongguan Anyfine Electronic Technology Co., Ltd
Notebook	HP ProBook 440 G6	---	HP

3.5 Test Conditions

Date of test: Nov.22,2024 – Dec.10,2024

Date of EUT Receive: Nov.06, 2024

Temperature: 20°C-24°C

Relative Humidity: 48%-49%

3.6 Modifications

No modification was made.

4 CONDUCTED EMISSION TEST

4.1 Test Standard and Limit

4.1.1 Test Standard

FCC Part 15 Subpart B

4.1.2 Test Limit

Table 3 Conducted Emission Test Limit

Frequency range MHz	Class B		Class A	
	Quasi Peak dB(μ V)	Average dB(μ V)	Quasi Peak dB(μ V)	Average dB(μ V)
0.15 to 0.5	66 to 56	56 to 46	79	66
0.5 to 5	56	46	73	60
5 to 30	60	50	73	60

* Decreasing linearly with logarithm of the frequency


4.2 Test Procedure

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI test receiver used to test the emissions from both sides of AC line. The bandwidth of EMI test receiver is set at 9 kHz.

4.3 Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

4.4 Test Setup

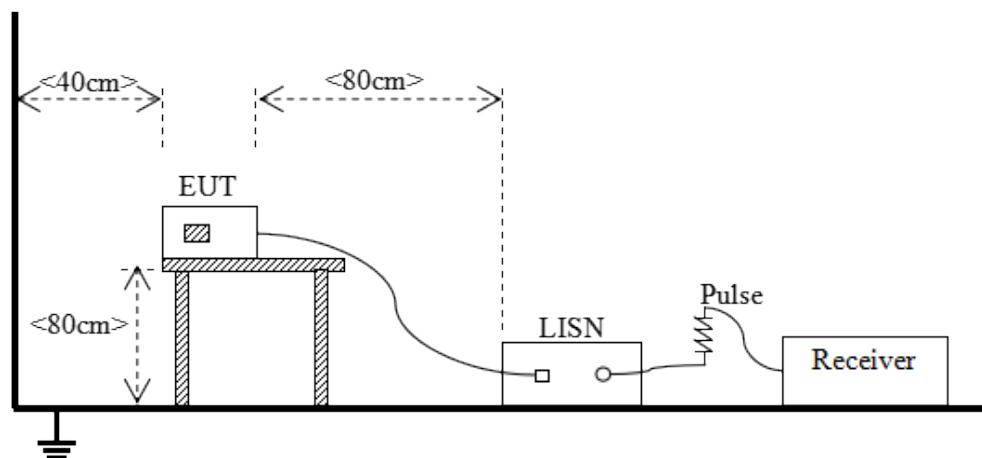

4.5 Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB8501/06	AMN	ROHDE&SCHWARZ	ESH2-Z5	2025-01-06	12Months
SB9054/05	EMI Test Receiver	ROHDE&SCHWARZ	ESCI 3	2024-06-17	12Months
SB9548	Shielded Room	Albatross	SR	2024-08-28	12Months

4.6 Test Condition

Date of test: Nov.22,2024

Temperature: 24 °C

Relative Humidity: 48 %RH

Atmospheric Pressure: 101.5 kPa

4.7 Test Data

Note: Emissions not reported below are too low against the prescribed limits. "/" means the test data is too low against the limit.

Classification of Equipment: Class B


Table 4 Conducted Emission Test Data

Test mode: 1										
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak				Average			
			Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)	Margin (dB)	Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)	
Line	0.154	10.1	40.0	50.1	65.8	15.7	24.5	34.6	55.8	21.2
Line	0.505	10.1	19.8	29.9	56.0	26.1	14.4	24.5	46.0	21.5
Line	0.604	10.1	18.1	28.2	56.0	27.8	15.1	25.2	46.0	20.8
Line	1.608	10.1	15.0	25.1	56.0	30.9	7.4	17.5	46.0	28.5
Line	4.024	10.0	15.6	25.6	56.0	30.4	5.8	15.8	46.0	30.2
Line	14.838	10.0	12.9	22.9	60.0	37.1	6.9	16.9	50.0	33.1
Neutral	0.172	10.1	35.3	45.4	64.9	19.5	19.1	29.2	54.9	25.7
Neutral	0.519	10.1	17.6	27.7	56.0	28.3	14.4	24.5	46.0	21.5
Neutral	0.564	10.1	15.2	25.3	56.0	30.7	13.9	24.0	46.0	22.0
Neutral	2.116	10.1	6.4	16.5	56.0	39.5	0.0	10.1	46.0	35.9
Neutral	3.880	10.0	9.6	19.6	56.0	36.4	1.0	11.0	46.0	35.0
Neutral	5.932	10.0	9.6	19.6	60.0	40.4	3.2	13.2	50.0	36.8


REMARKS: 1. Emission level (dB μ V) =Read Value (dB μ V) + Correction Factor (dB)

2. Correction Factor (dB) =LISN Factor (dB) + Cable Factor (dB) +Limiter Factor (dB)

Test Mode 1
Line

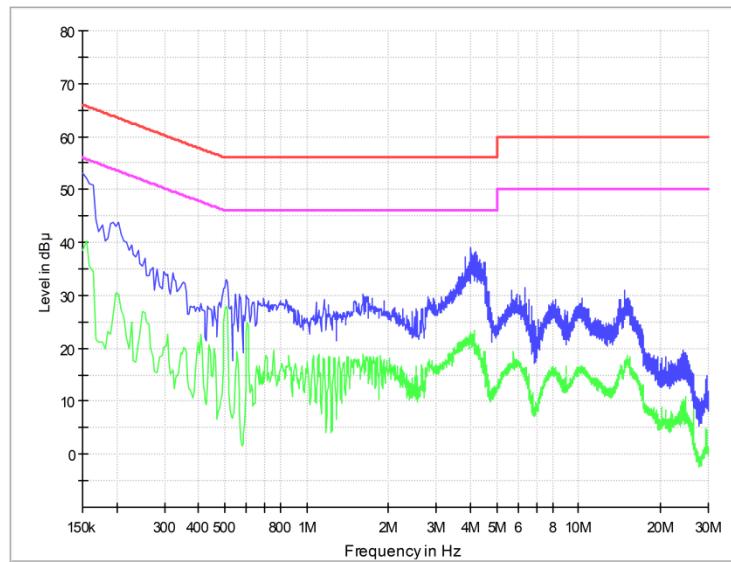

Neutral

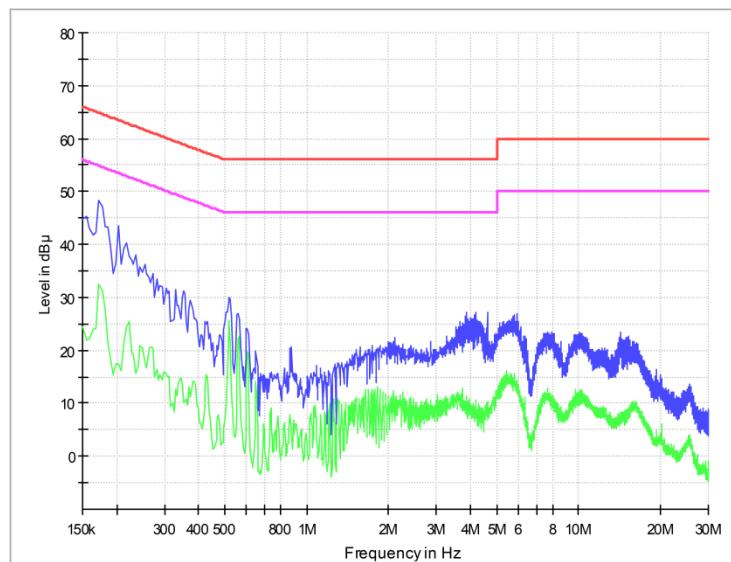

5 RADIATED EMISSION TEST

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15 Subpart B

5.1.2 Test Limit

Table 5 Radiated Emission Test Limit for FCC (Class A)

Frequency MHz	Test distance m	Limit dB(μ V/m)		
		Quasi-peak	Average	Peak
30~88	10	39.1		
88~216		43.5		
216~960		46.4		
960~1000		49.5		
30~88	3	49.1		
88~216		53.5		
216~960		56.4		
960~1000		59.5		
>1000	3		59.5	79.5

Conditional testing procedure for above 1 GHz :

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705~108	1000
108~500	2000
500~1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

* The lower limit shall apply at the transition frequency.

Table 6 Radiated Emission Test Limit for FCC (Class B)

Frequency MHz	Test distance m	Limit dB(μ V/m)		
		Quasi-peak	Average	Peak
30~88	10	30		
88~216		33.5		
216~960		36		
960~1000		44		
30~88	3	40		
88~216		43.5		
216~960		46		
960~1000		54		
>1000	3		54	74

Conditional testing procedure for above 1 GHz :

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
--	--

Below 1.705	30
1.705~108	1000
108~500	2000
500~1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

* The lower limit shall apply at the transition frequency.

5.2 Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters or 10 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level.

Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)

VBW \geq 3 x RBW

Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);

Peak & Average (frequency range above 1 GHz);

Changing VBW to 10 Hz for average measurement


The use of a higher-than-specified video bandwidth produces a conservative measurement result.

5.3 Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.


5.4 Test Setup

Below 1 GHz

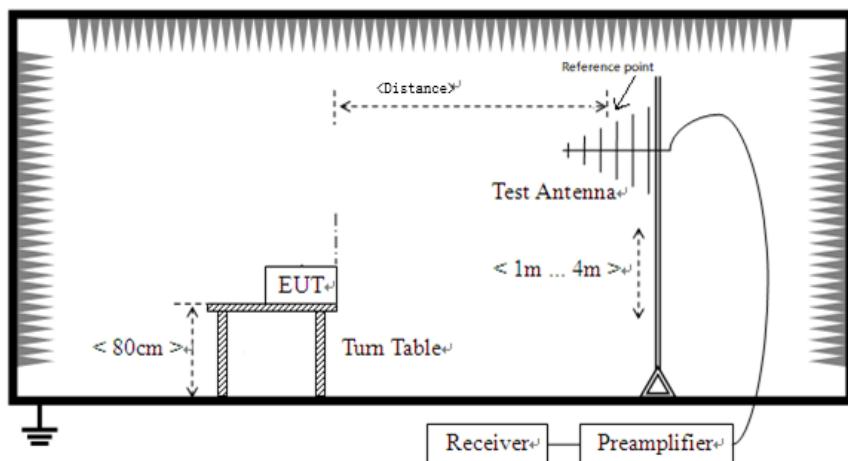

Distance = 3 meters or 10 meters

Above 1 GHz

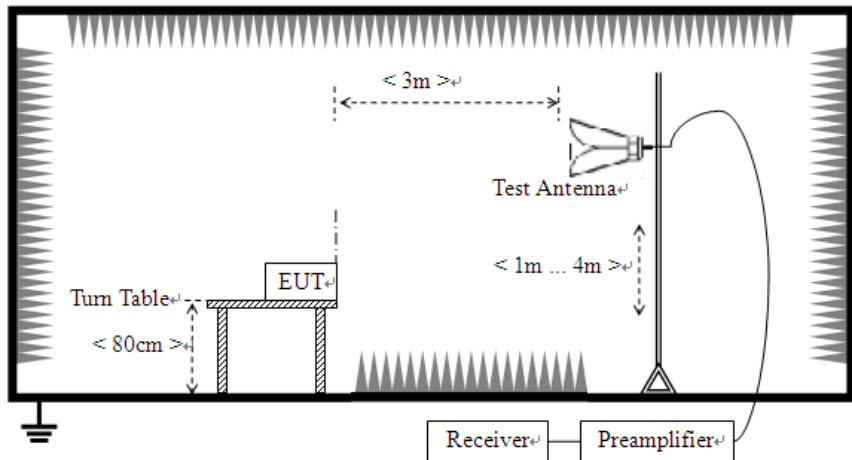

5.5 Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB13958	Horn Antenna	ROHDE&SCHWARZ	HF907	2024-04-30	12Months
SB17366	Test Receiver	ROHDE&SCHWARZ	ESR26	2024-04-30	12Months
SB3955	Broadband Antenna	SCHWARZBECK	VULB9163	2024-04-30	12Months
SB9555/01	Anechoic chamber	Albatross	/	2024-08-12	12Months

5.6 Test Condition

Date of test: Dec.10,2024

Temperature: 20 °C

Relative Humidity: 49 %RH

Atmospheric Pressure: 101.3 kPa

5.7 Test Data

Note: Emissions not reported below are too low against the prescribed limits. "/" means the test data is too low against the limit.

Classification of Equipment: Class B

Below 1 GHz Test Distance: 3 m



Table 7 Radiated Emission Test Data

Test mode: 1									
Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading Value (dB μ V/m)	Emission Level (dB μ V/m)	Polarity (Horizontal/Vertical)	Limits (dB μ V/m)	Margin (dB)	Note	
54.444	0.6	13.0	14.5	28.1	V	40.0	11.9	QP	
143.878	1.0	8.2	22.7	31.9	V	43.5	11.6	QP	
153.966	1.1	8.3	24.7	34.1	V	43.5	9.4	QP	
163.472	1.0	8.7	19.8	29.5	V	43.5	14.0	QP	
175.597	1.1	9.7	21.4	32.2	V	43.5	11.3	QP	



268.523	1.4	12.1	16.4	29.9	V	46.0	16.1	QP
153.966	1.1	8.3	17.6	27.0	H	43.5	16.5	QP
178.701	1.2	9.7	16.2	27.1	H	43.5	16.4	QP
265.710	1.3	12.1	22.8	36.2	H	46.0	9.8	QP
291.900	1.5	13.1	18.0	32.6	H	46.0	13.4	QP
354.562	1.7	14.3	13.4	29.4	H	46.0	16.6	QP
637.996	2.3	18.5	10.8	31.6	H	46.0	14.4	QP
16862.700	-31.8	42.2	49.1	59.5	V	74.0	14.5	PK
17624.300	-30.5	43.1	47.0	59.6	V	74.0	14.4	PK
17989.800	-30.5	43.7	48.5	61.7	V	74.0	12.3	PK
16952.800	-31.8	42.7	49.2	60.1	H	74.0	13.9	PK
17773.900	-30.7	43.3	45.6	58.2	H	74.0	15.8	PK
17959.200	-30.5	43.7	44.7	57.9	H	74.0	16.1	PK
16862.700	-31.8	42.2	35.4	45.8	V	54.0	8.2	AV
17624.300	-30.5	43.1	33.3	45.9	V	54.0	8.1	AV
17989.800	-30.5	43.7	33.5	46.7	V	54.0	7.3	AV
16952.800	-31.8	42.7	35.3	46.2	H	54.0	7.8	AV
17773.900	-30.7	43.3	33.3	45.9	H	54.0	8.1	AV
17959.200	-30.5	43.7	31.2	44.4	H	54.0	9.6	AV

REMARKS: Emission level (dBuV)=Read Value(dBuV/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

Test Mode 1
Horizontal

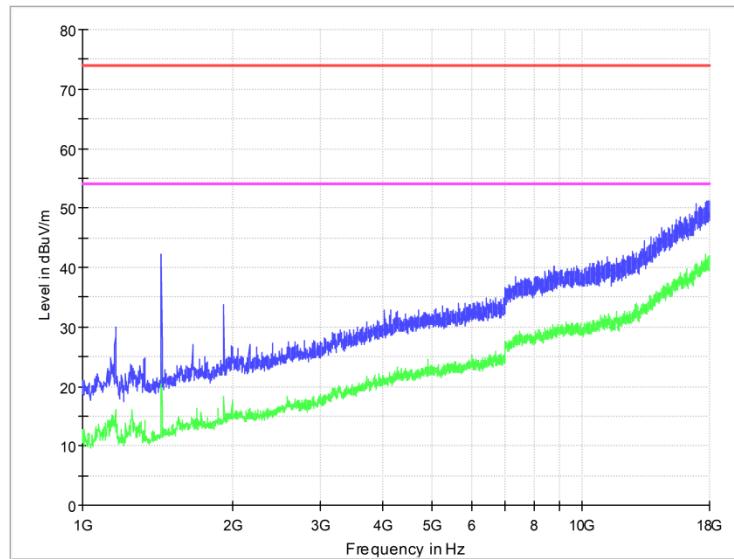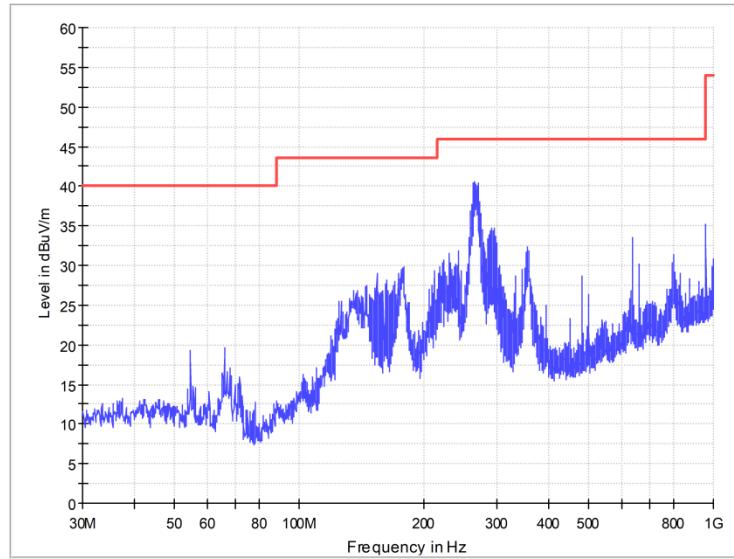

Vertical

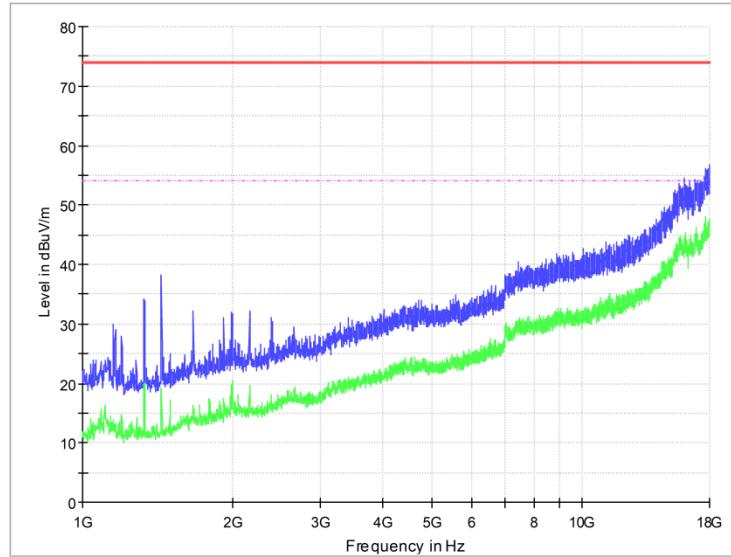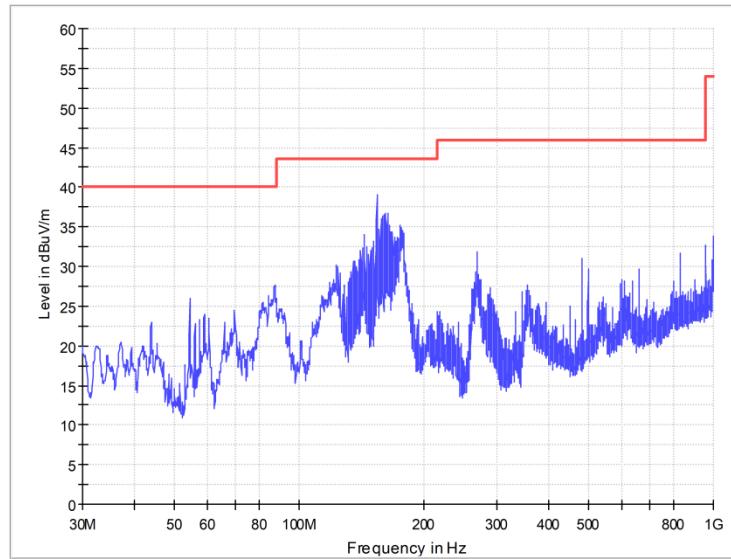

-----End of Report-----