






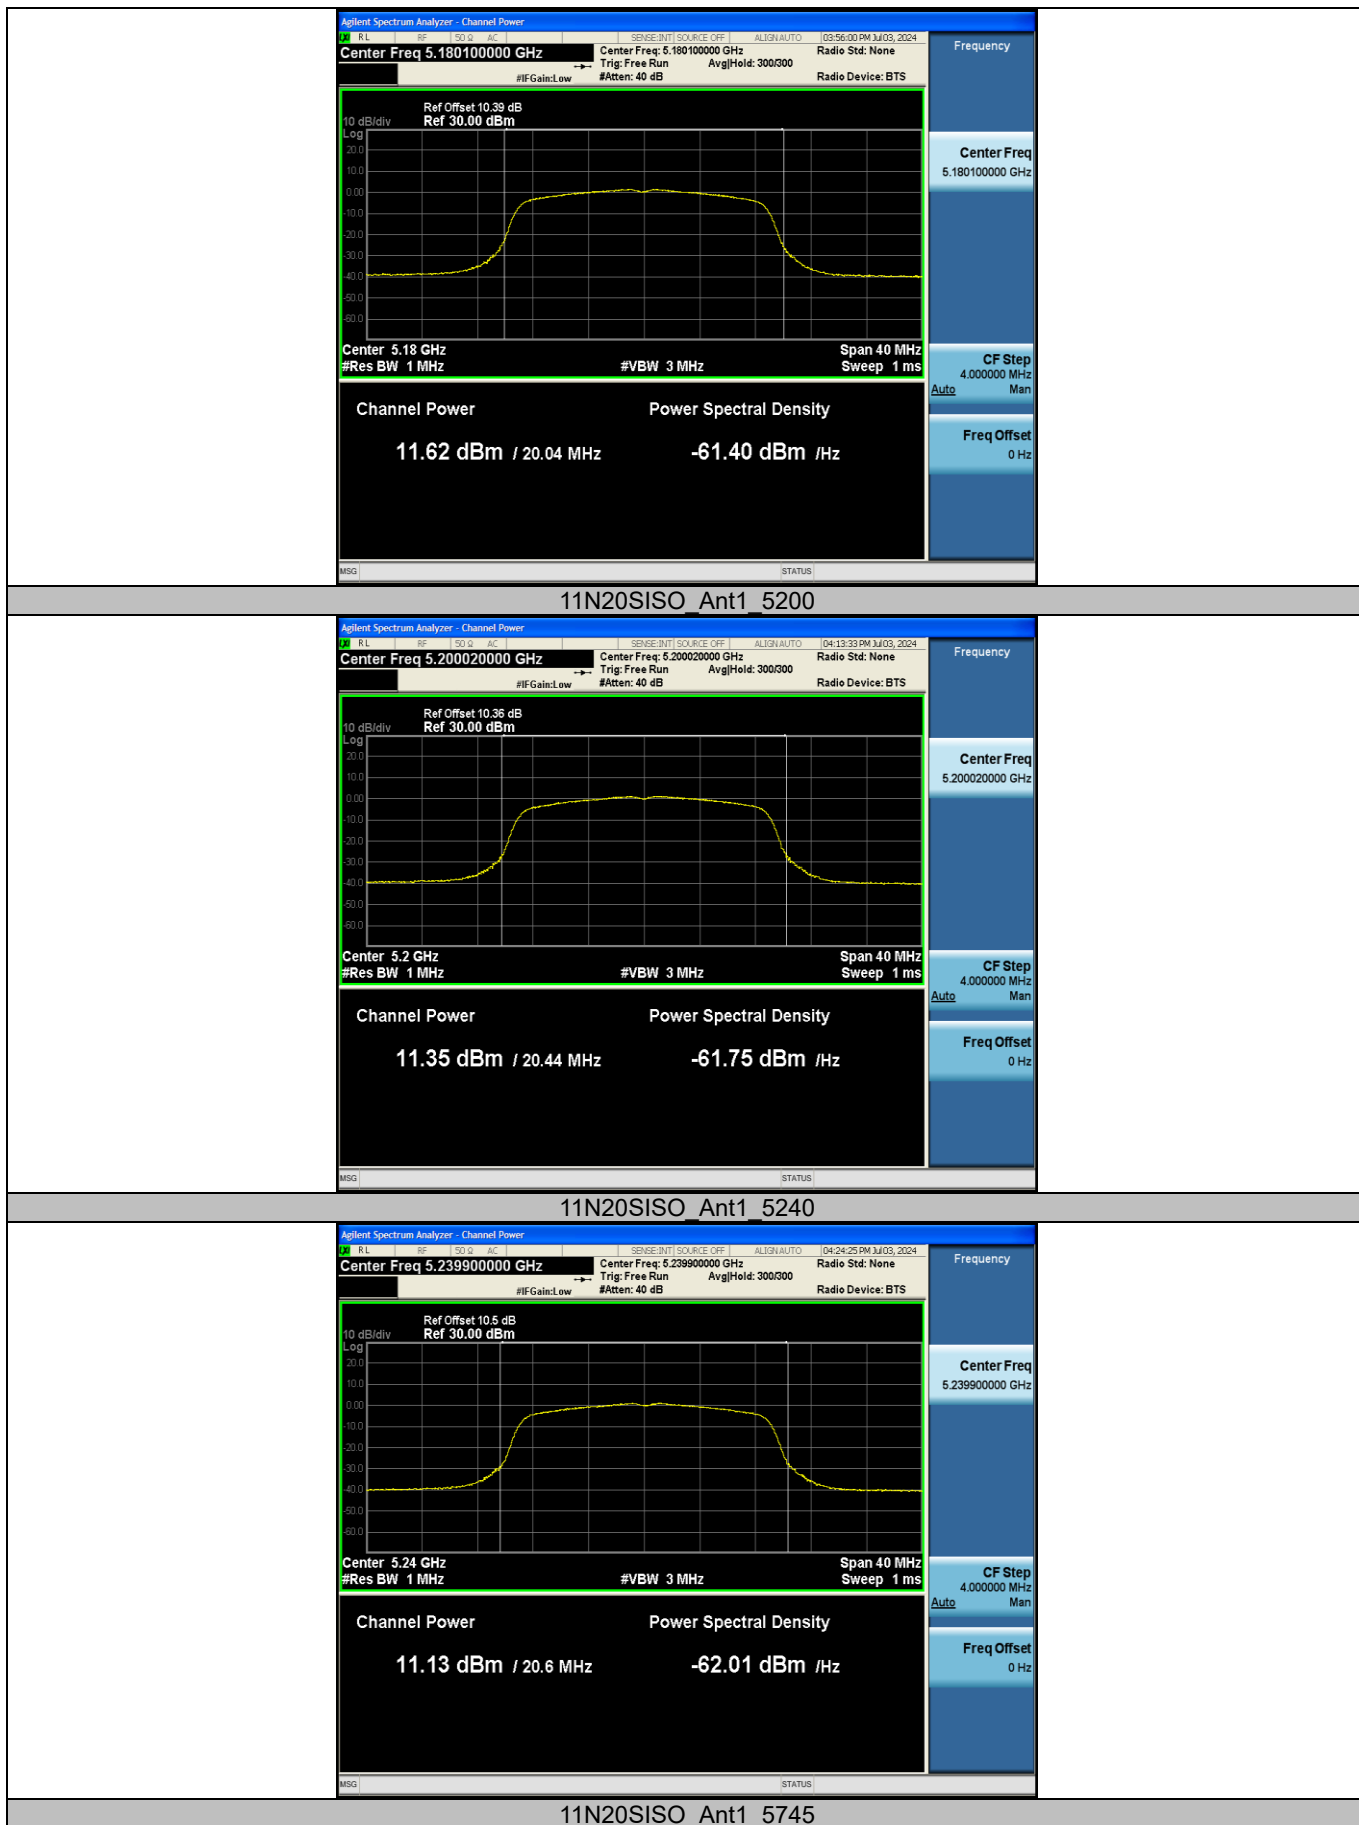

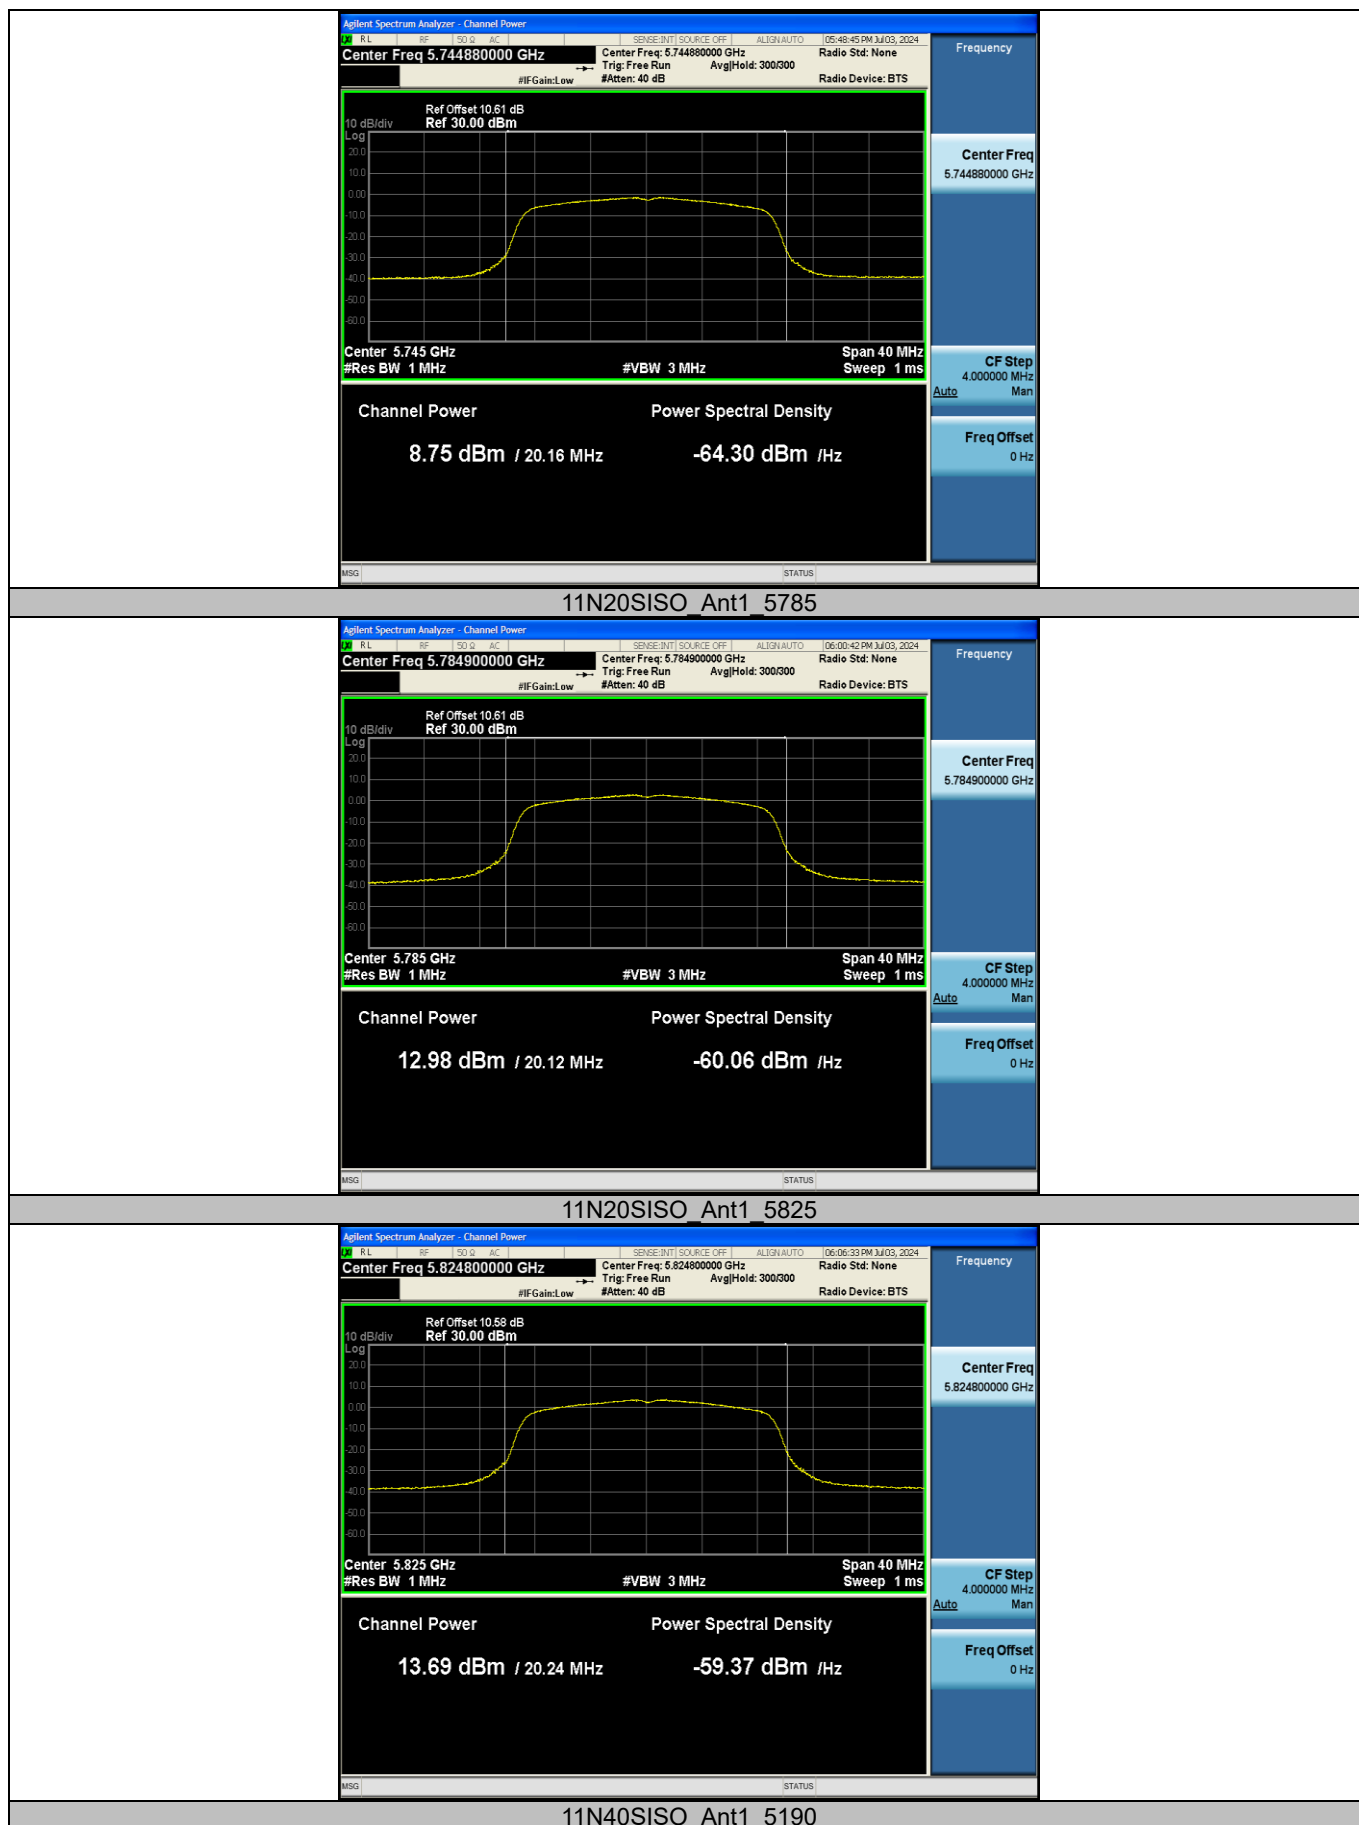

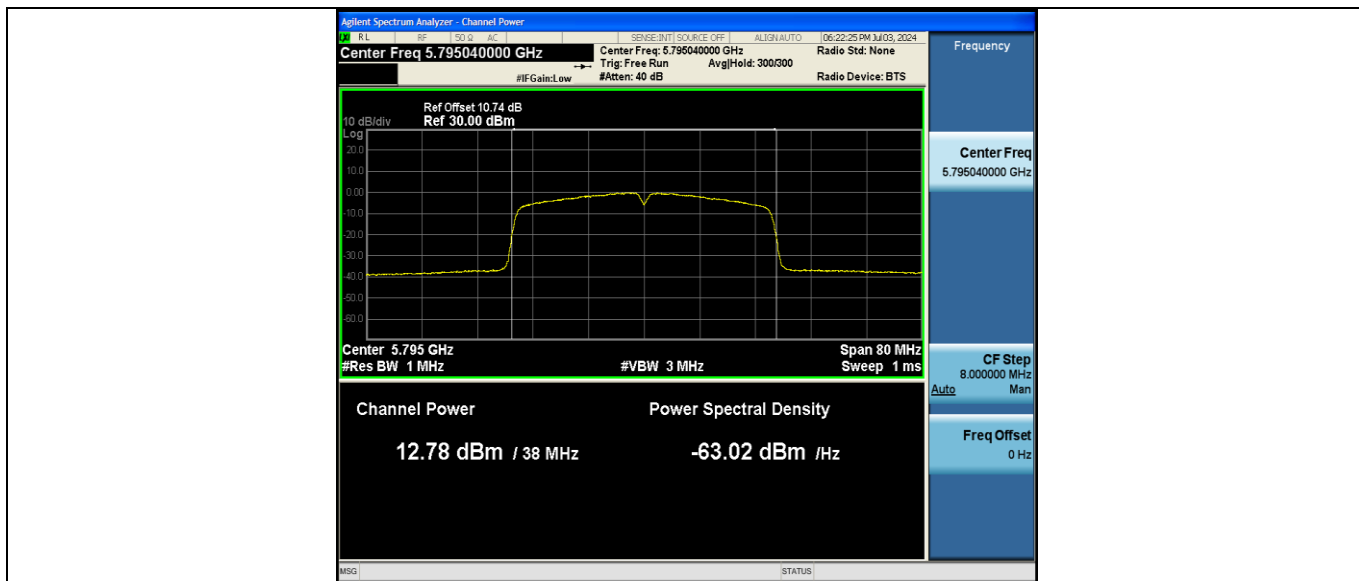


Appendix D: Maximum power spectral density


Test Result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	3.29	≤11.00	PASS
		5200	3.48	≤11.00	PASS
		5240	3.16	≤11.00	PASS
		5745	-3.09	≤30.00	PASS
		5785	-3.82	≤30.00	PASS
		5825	-3.25	≤30.00	PASS
11N20SISO	Ant1	5180	1.69	≤11.00	PASS
		5200	1.24	≤11.00	PASS
		5240	1.28	≤11.00	PASS
		5745	-4.06	≤30.00	PASS
		5785	0.50	≤30.00	PASS
		5825	1.36	≤30.00	PASS
11N40SISO	Ant1	5190	-0.68	≤11.00	PASS
		5230	-0.66	≤11.00	PASS
		5755	-5.90	≤30.00	PASS
		5795	-2.81	≤30.00	PASS


Note: The Duty Cycle Factor and RBW Factor is compensated in the graph.


Test Graphs

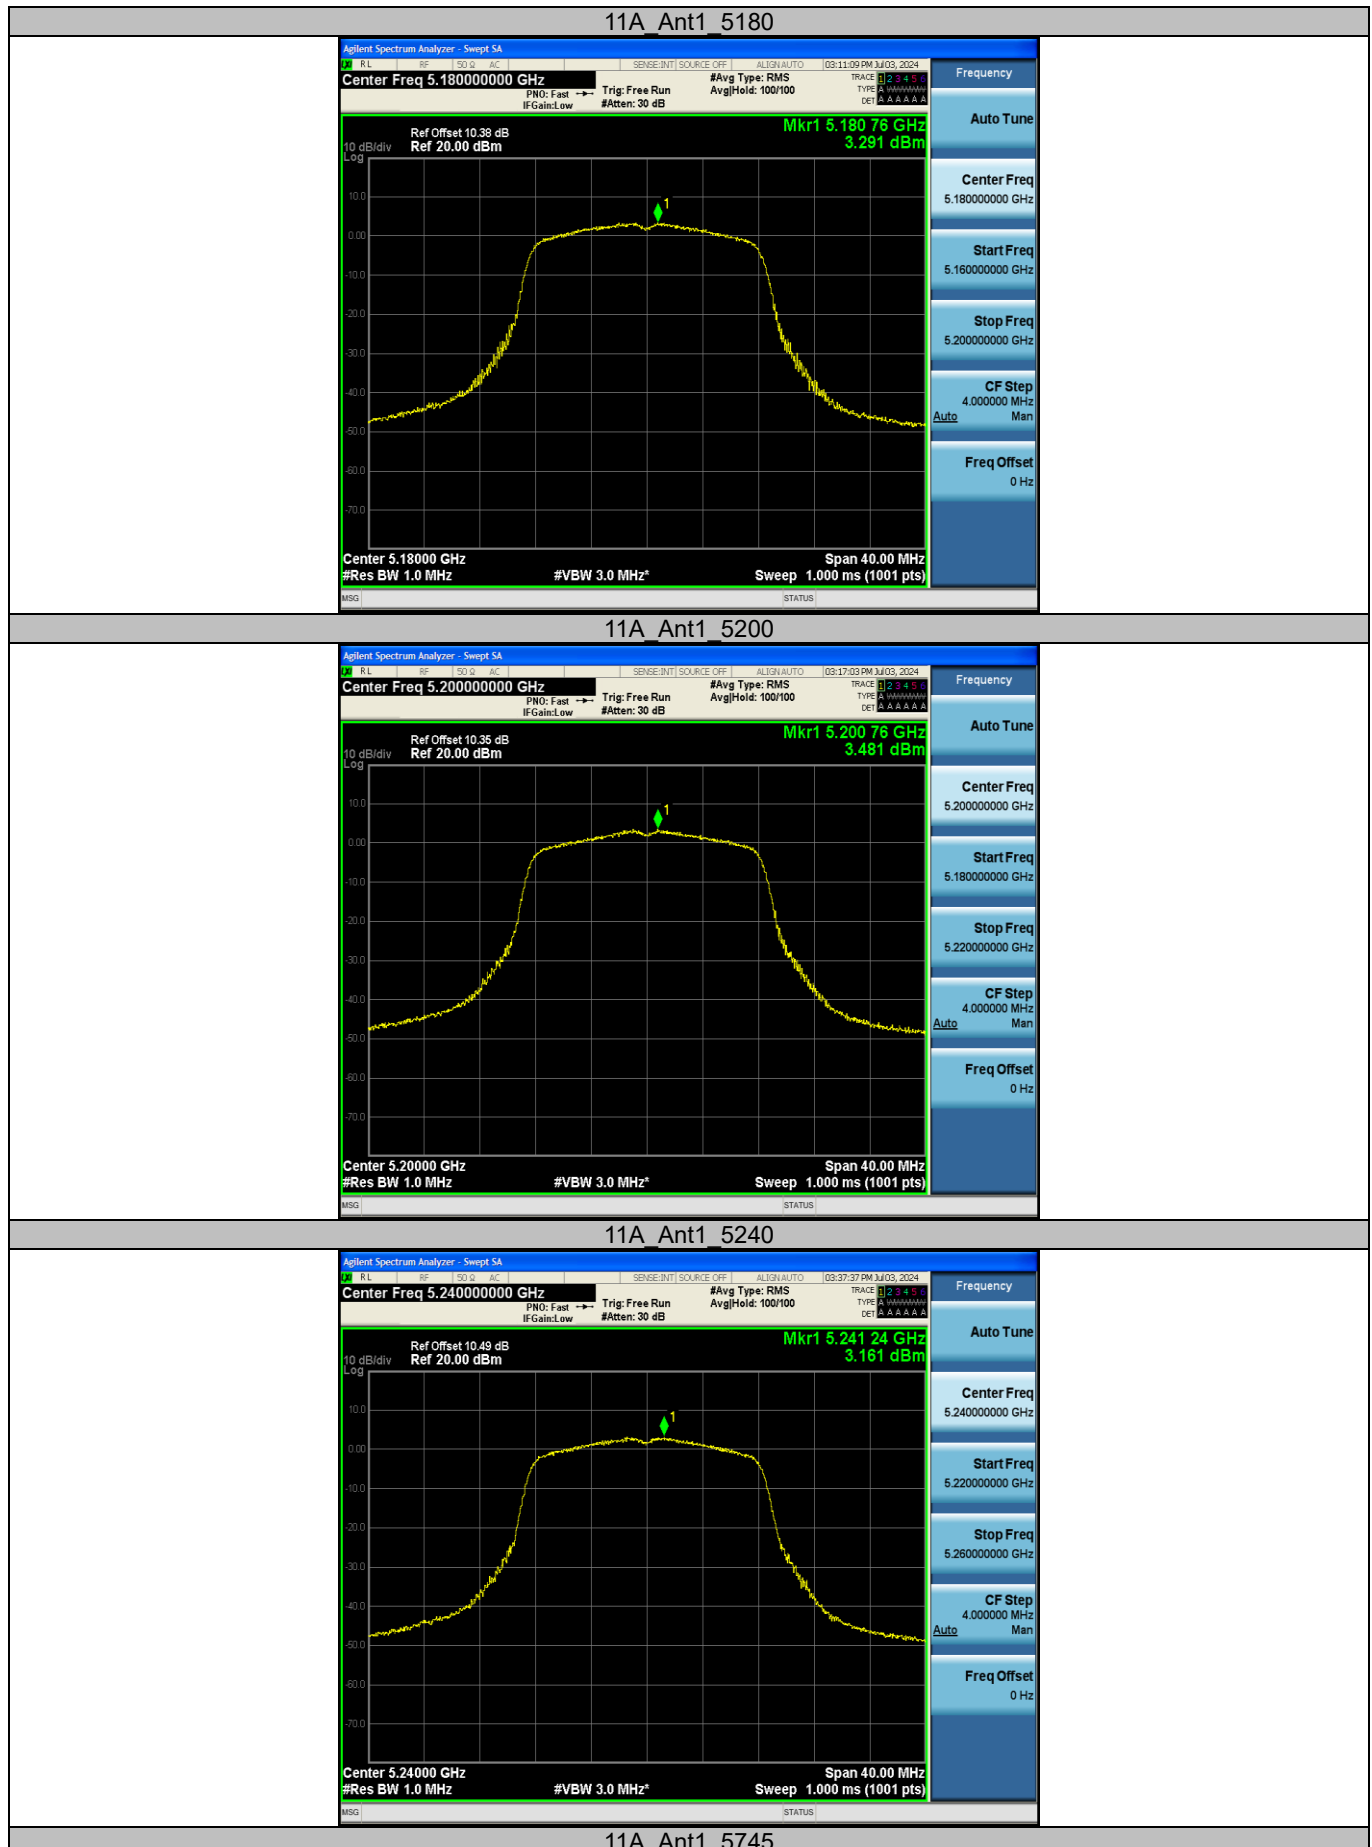


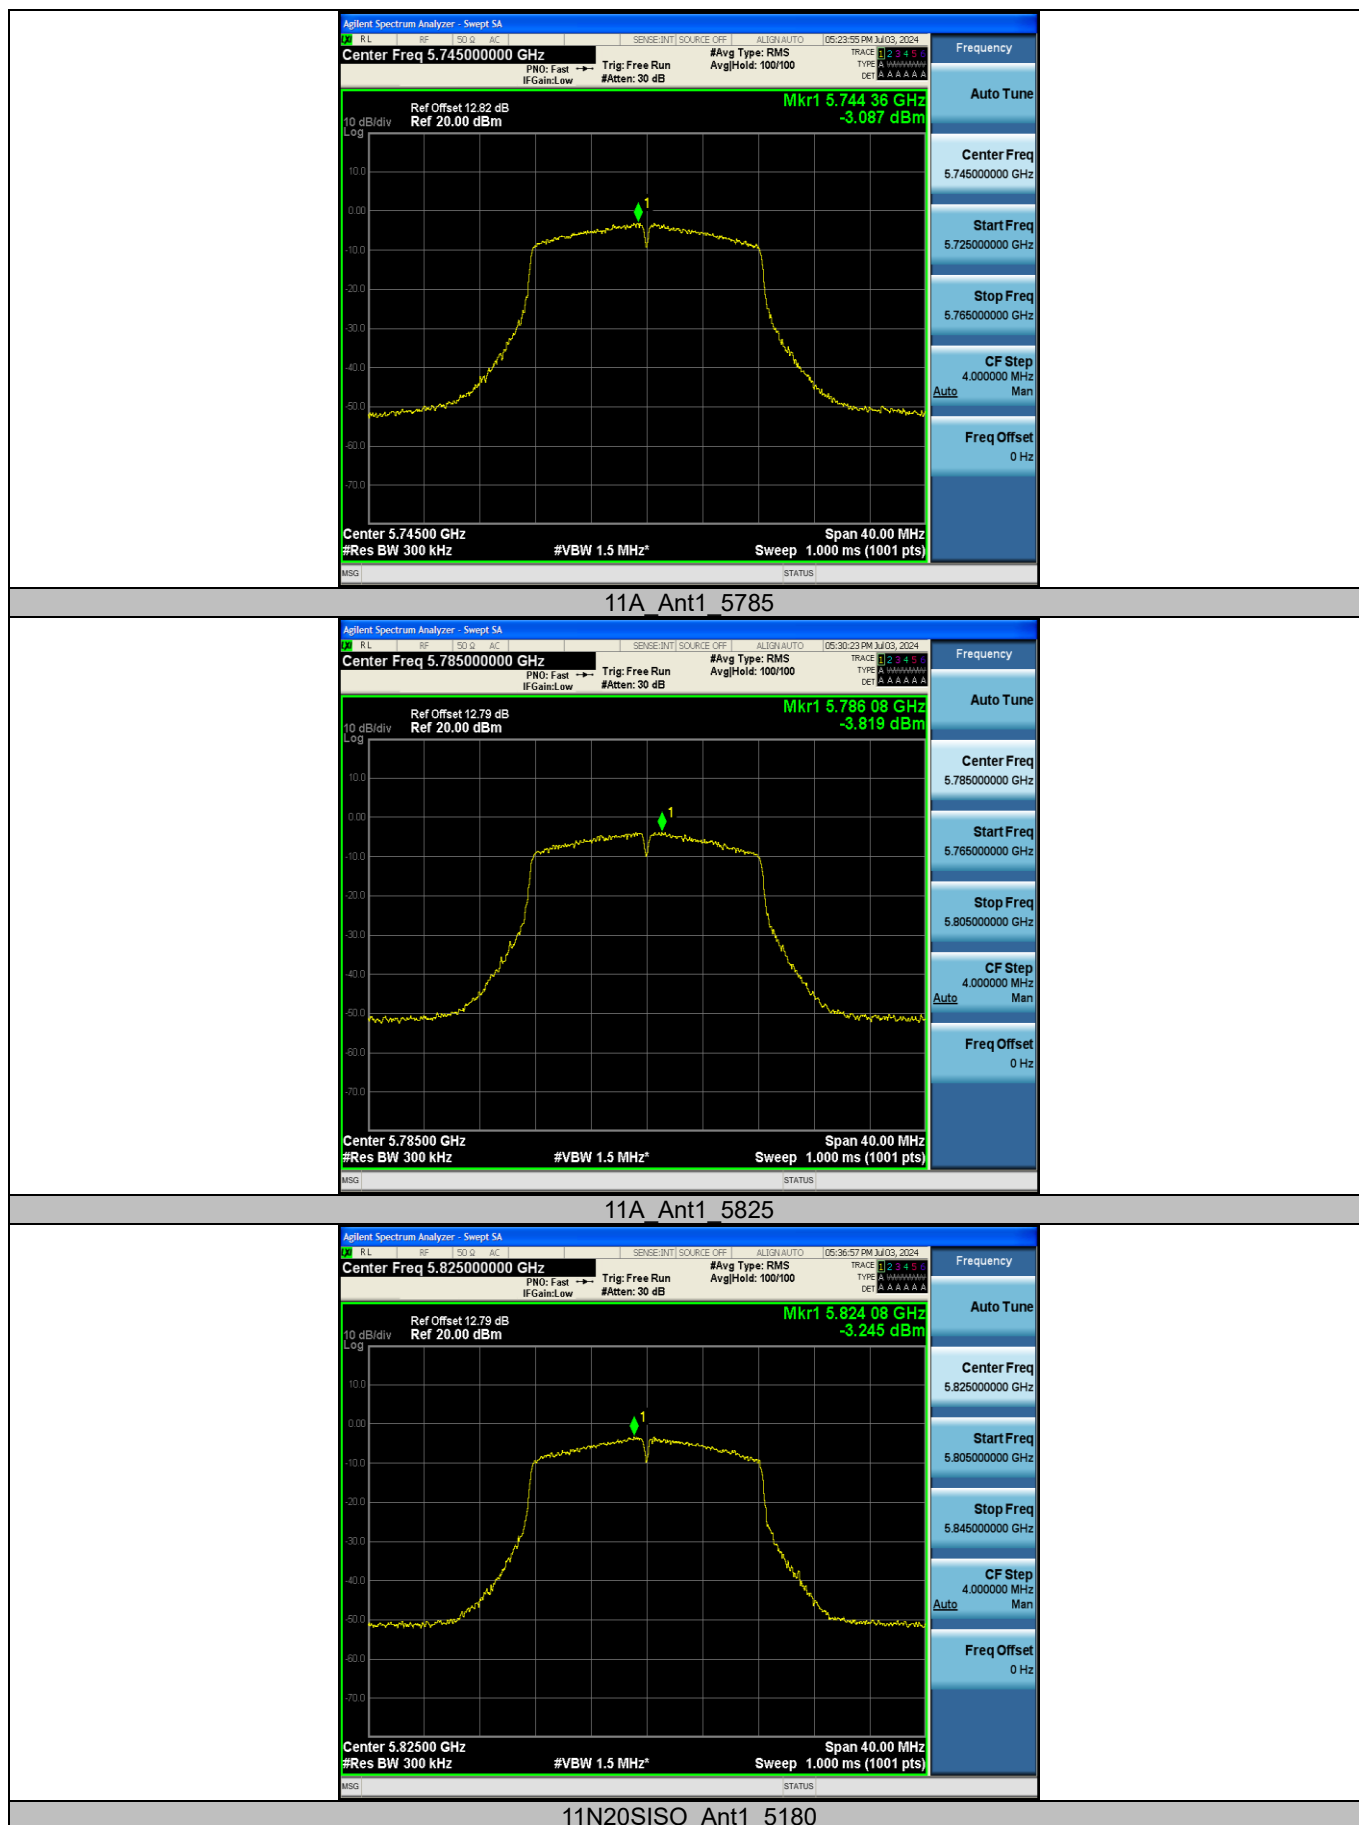

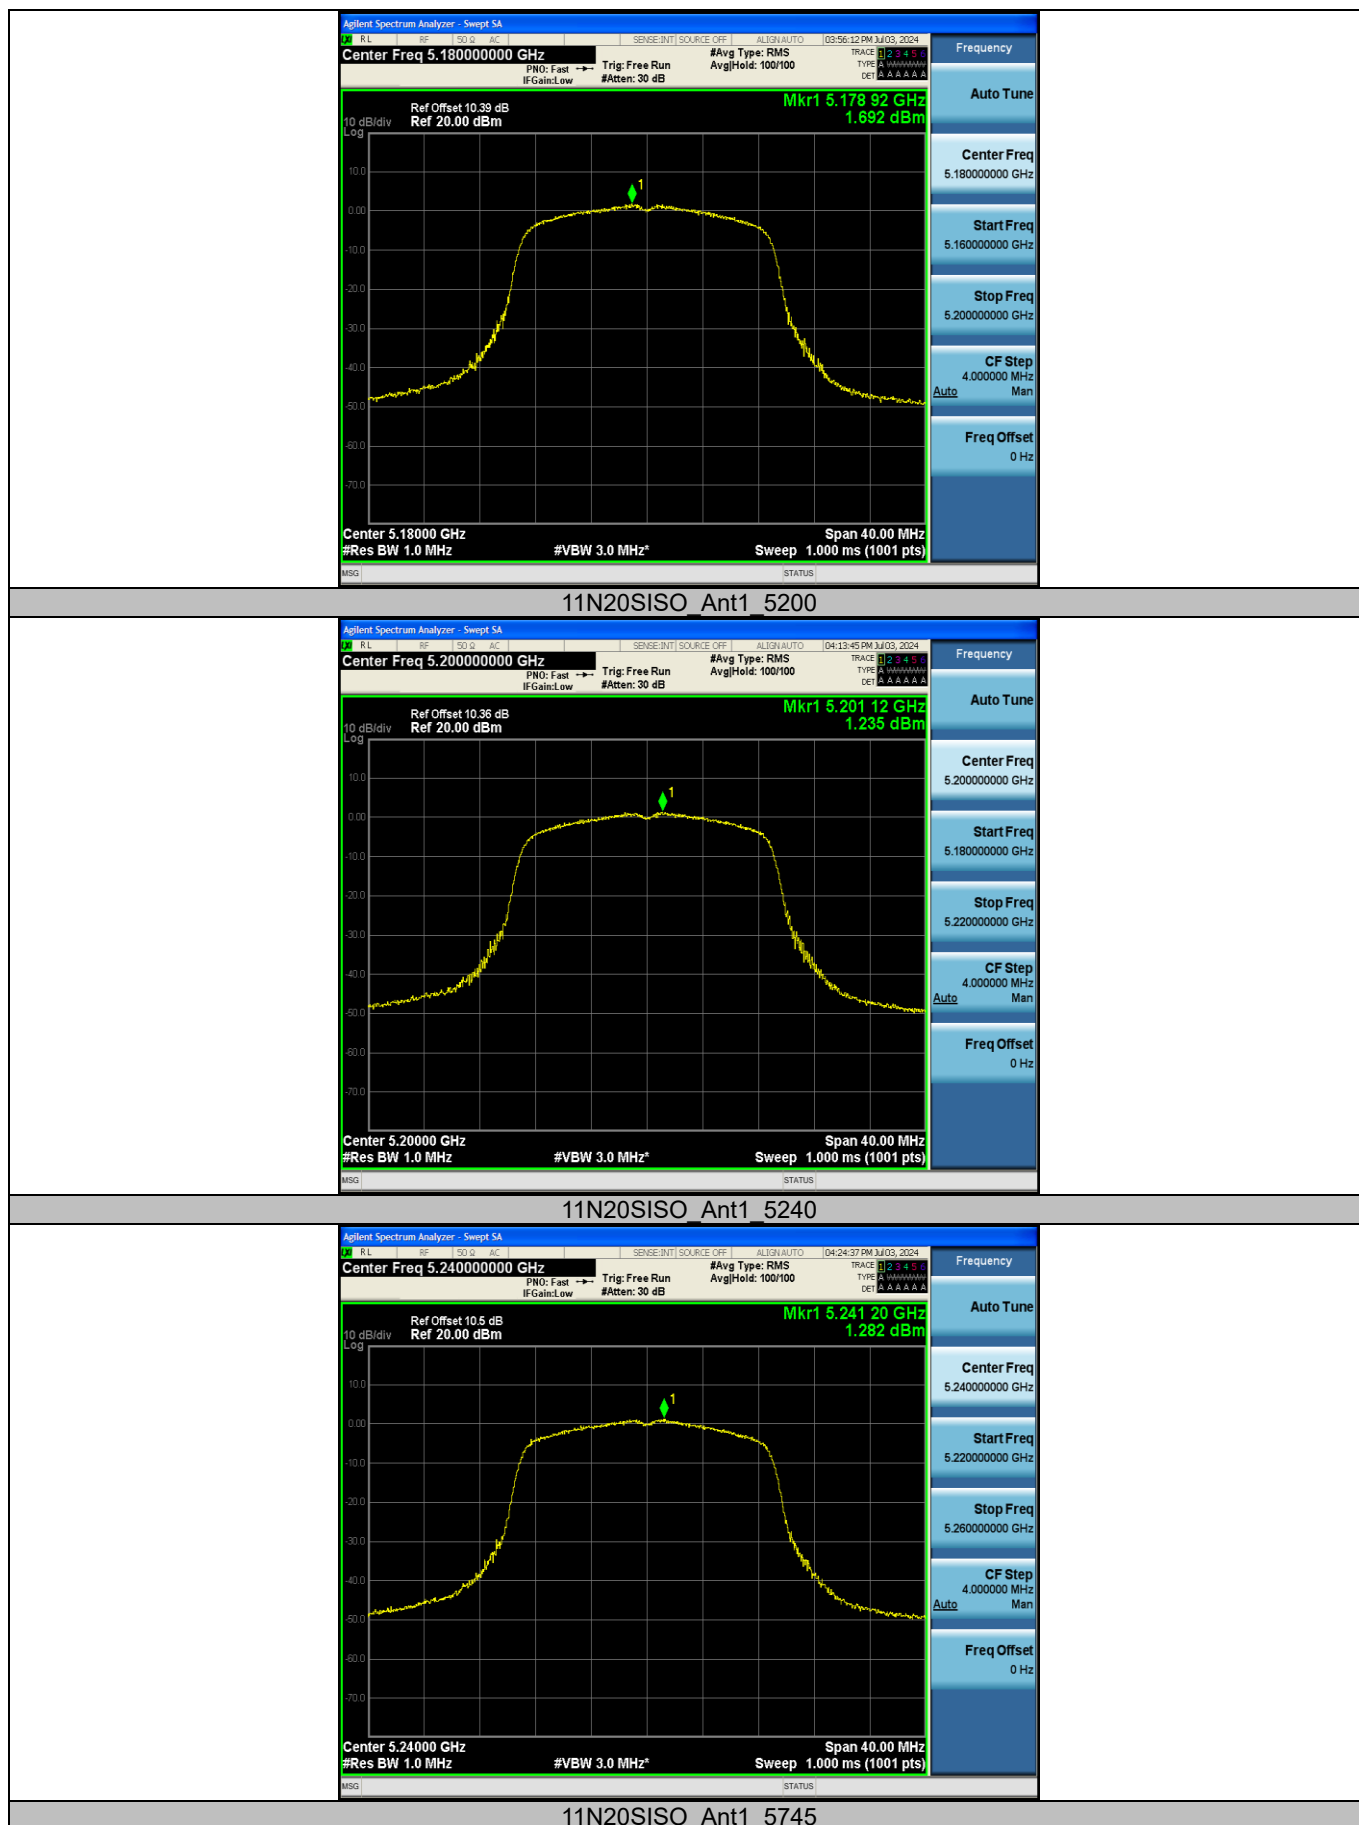

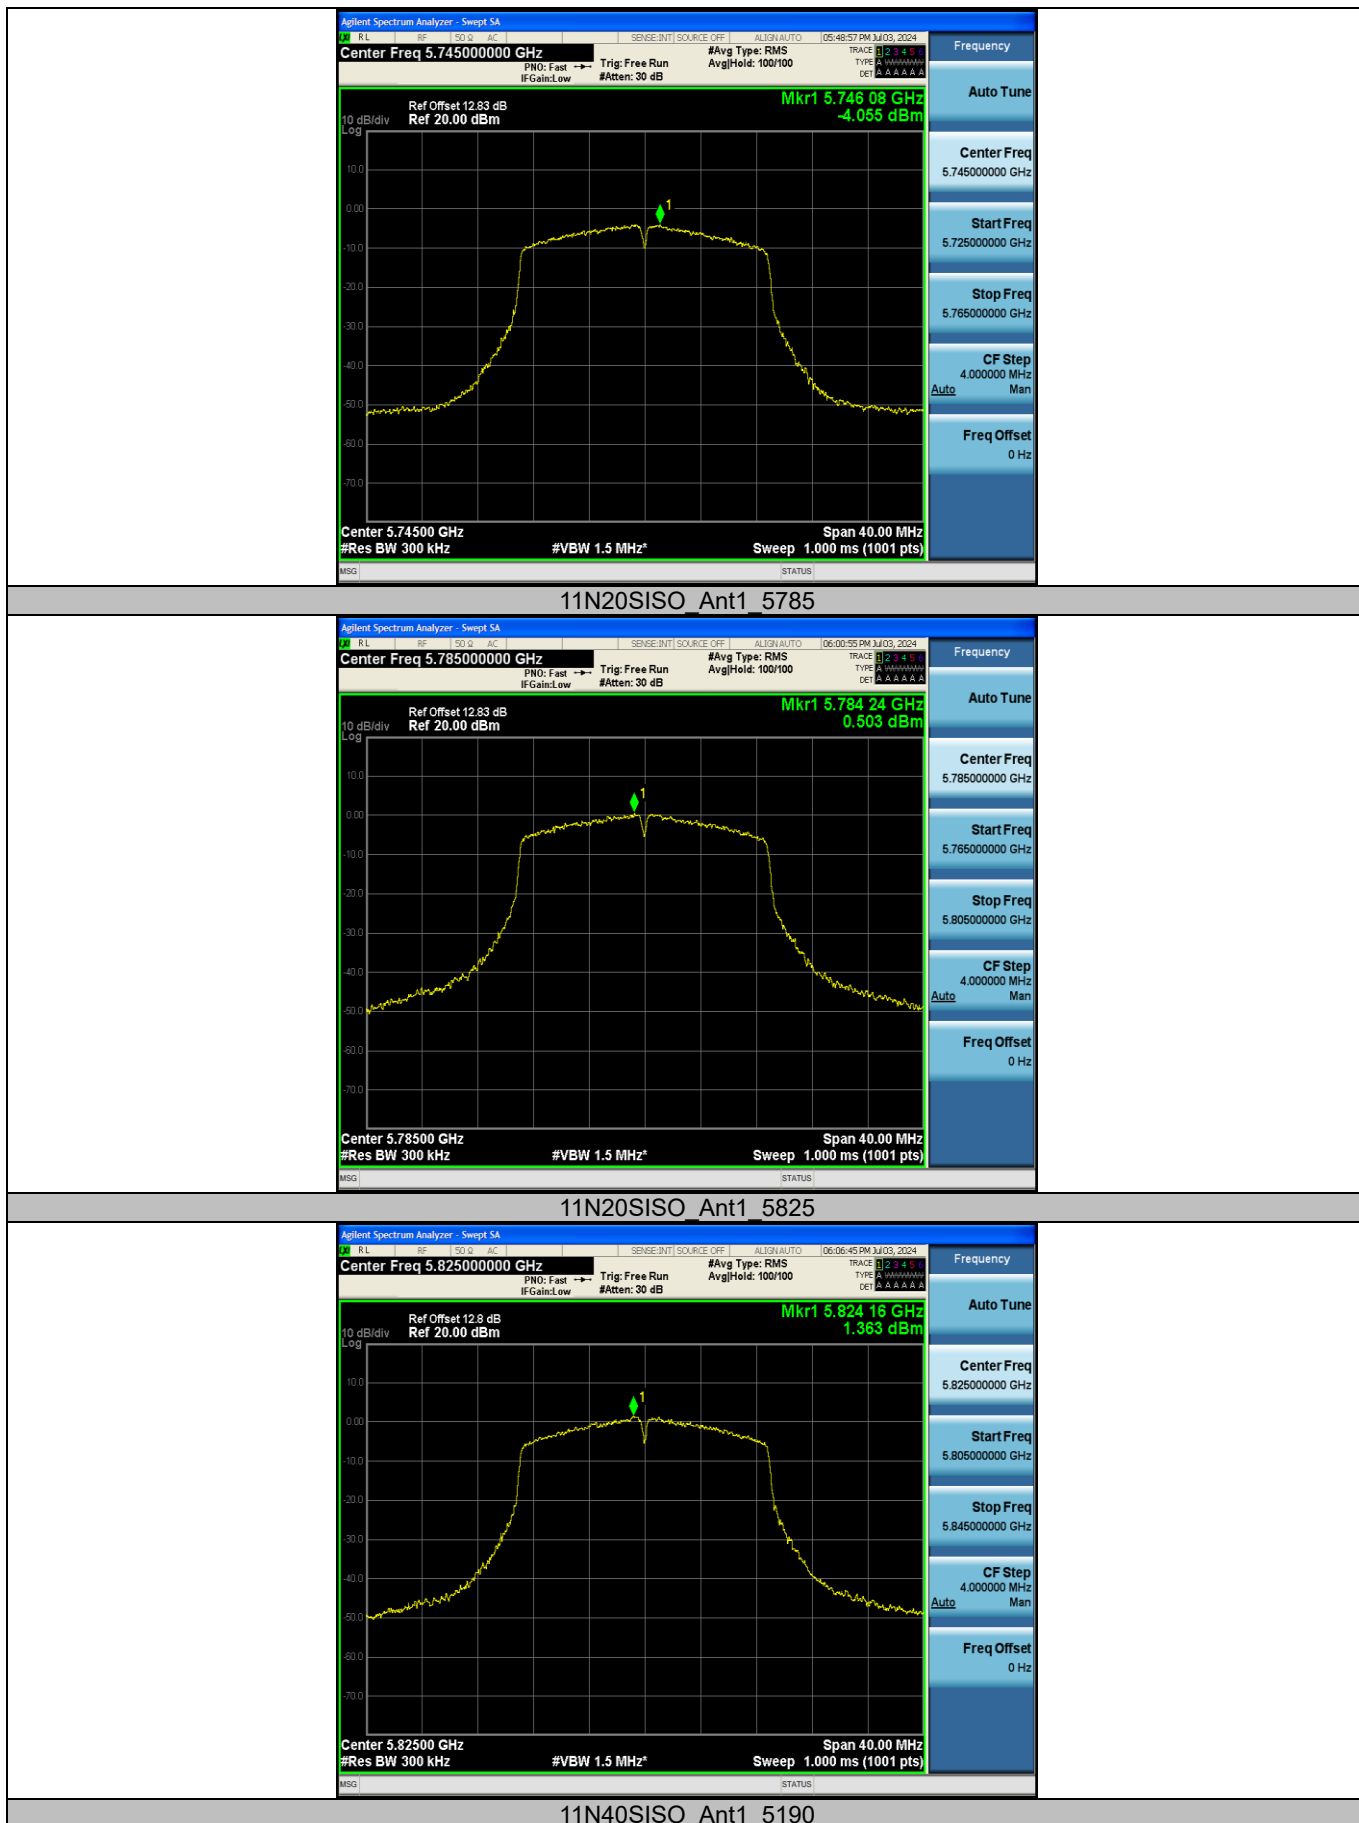

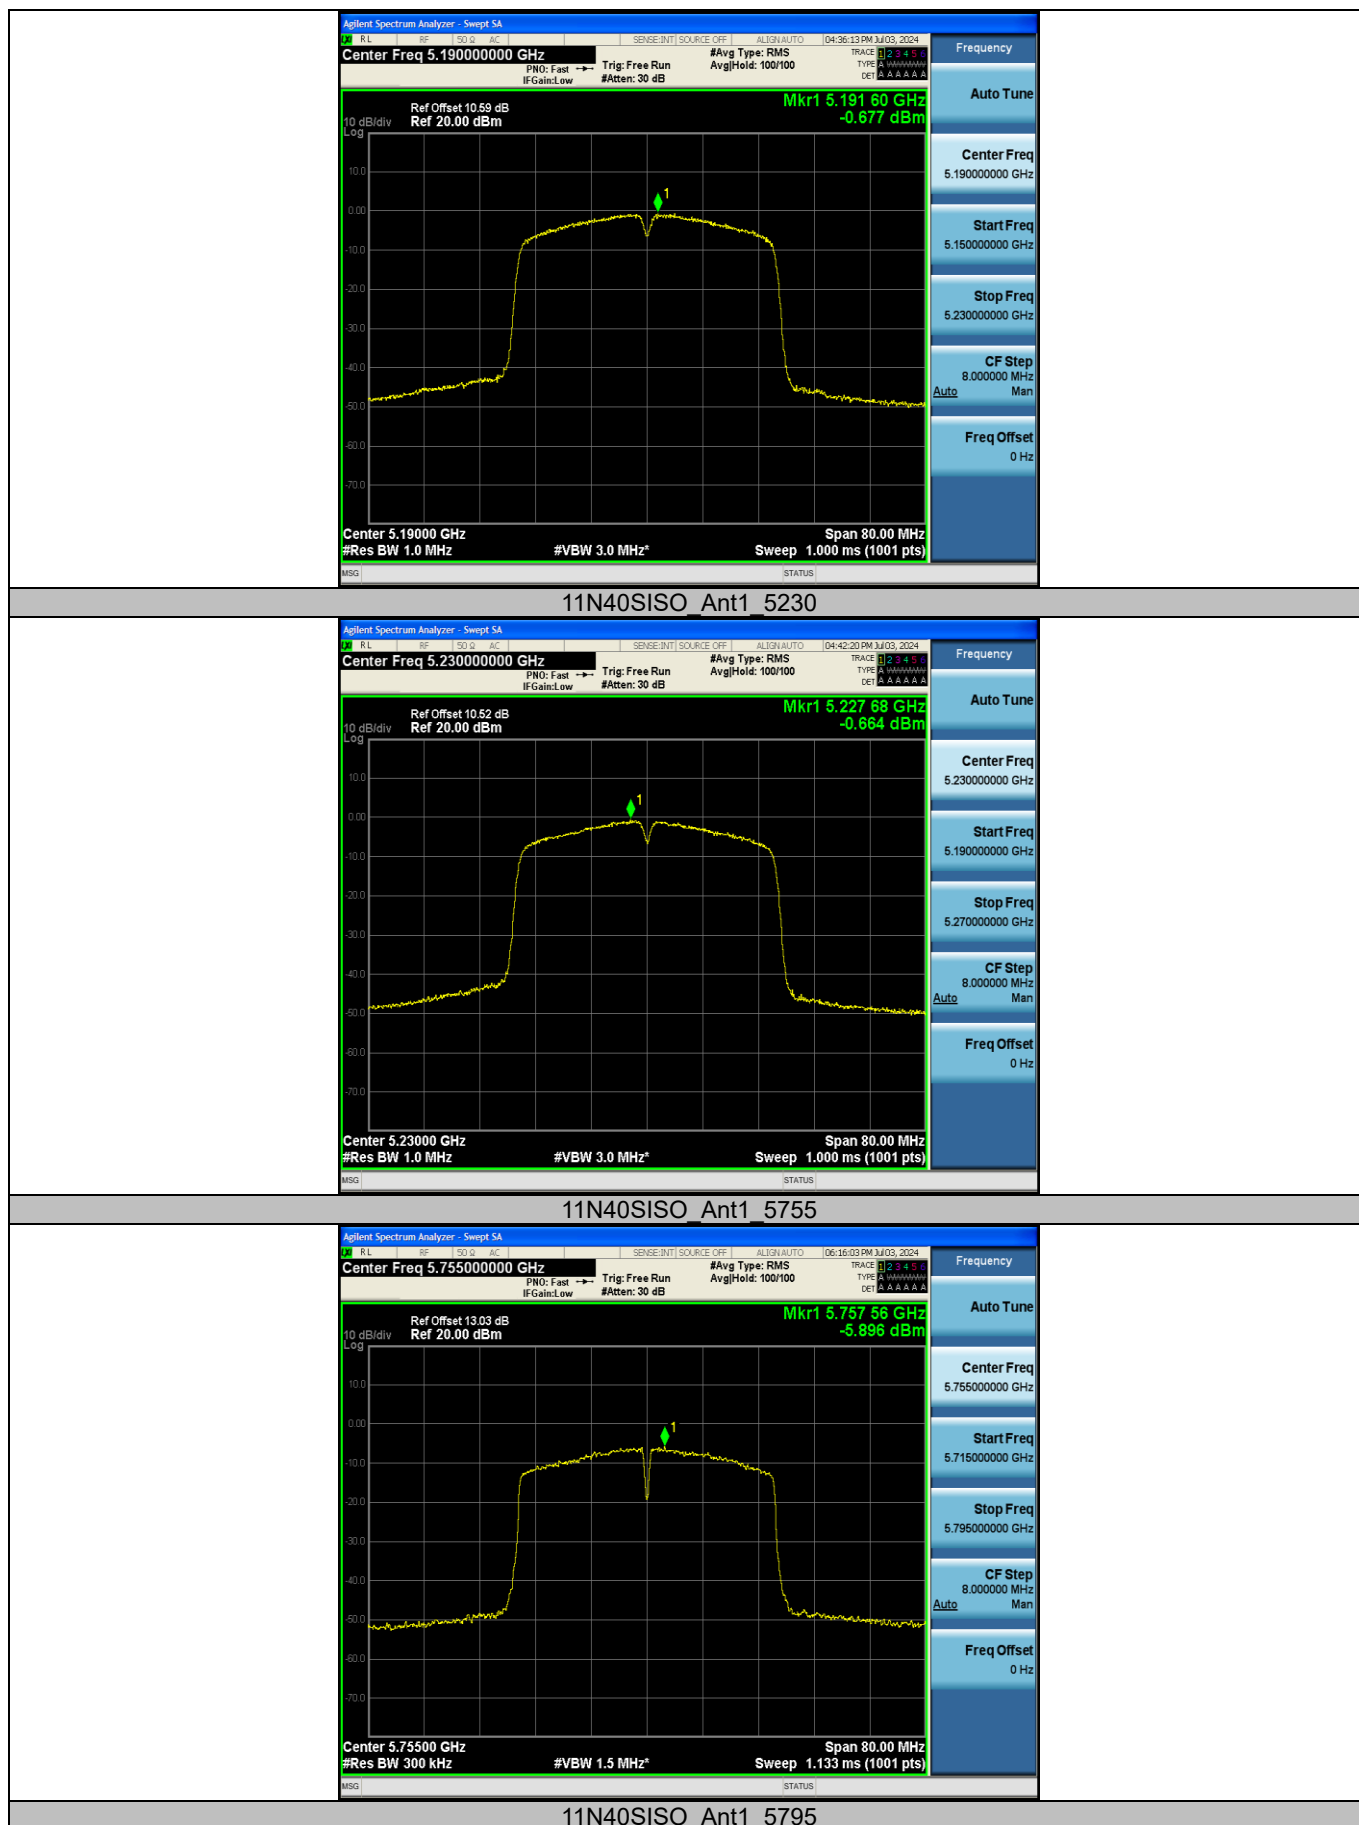

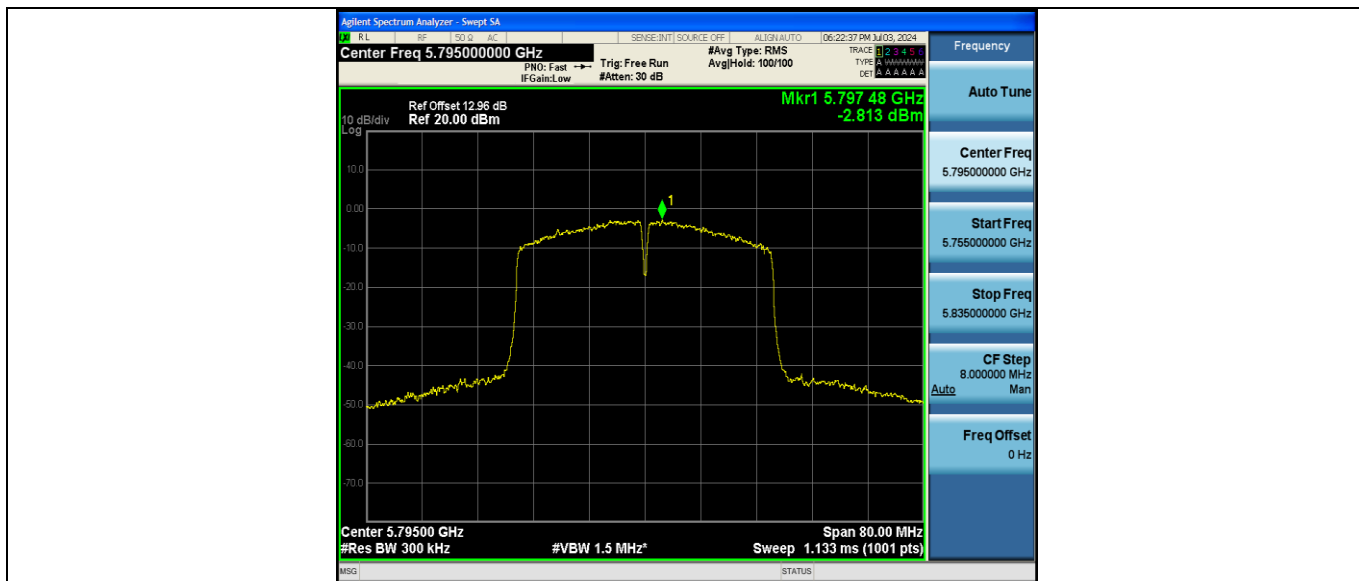


Appendix E: Band edge measurements


Test Graphs B1




11N20SISO Ant1 High 5240

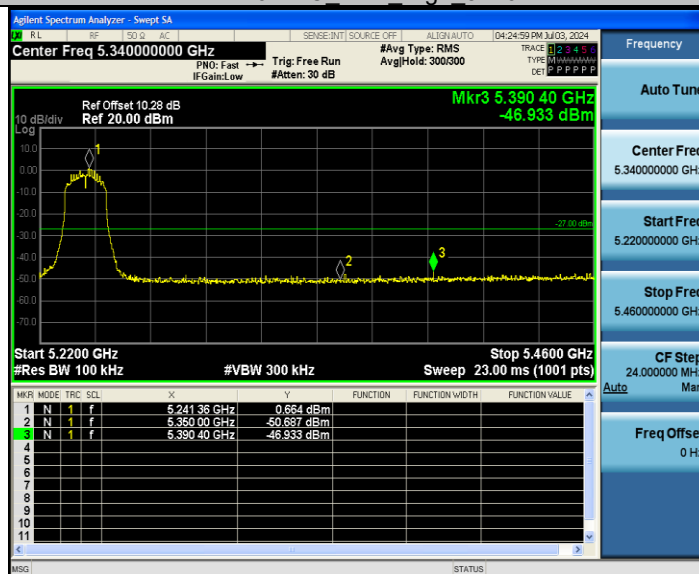


11N40SISO Ant1 Low 5190

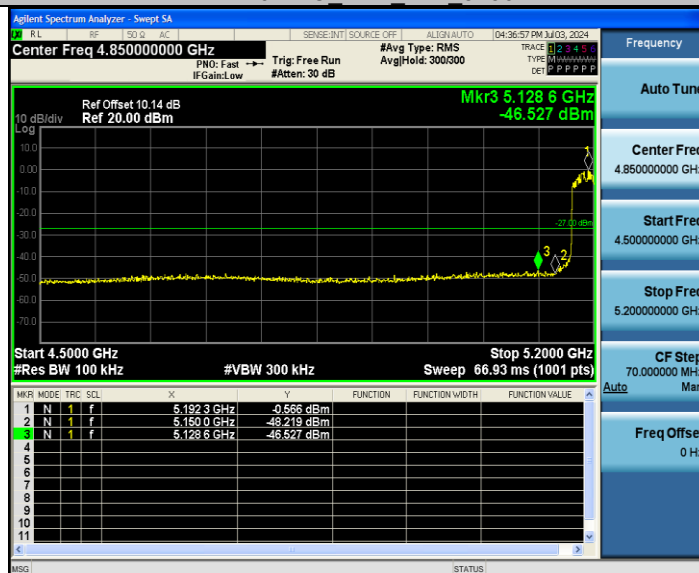


11N40SISO Ant1 High 5230

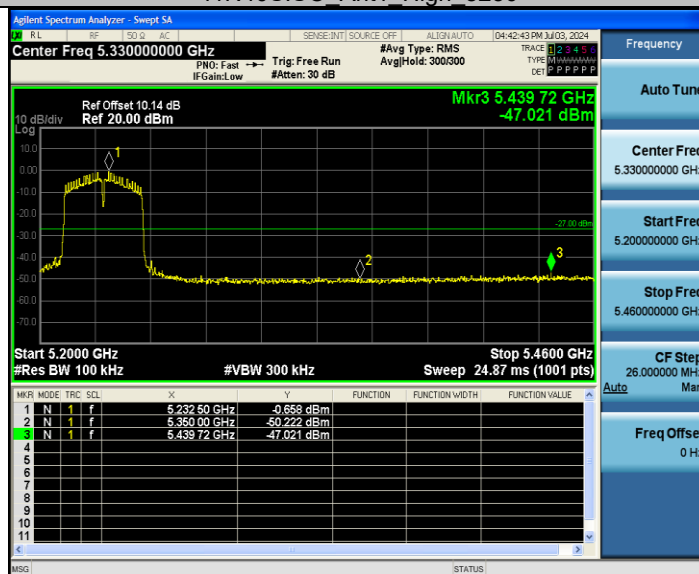

Test Graphs B4

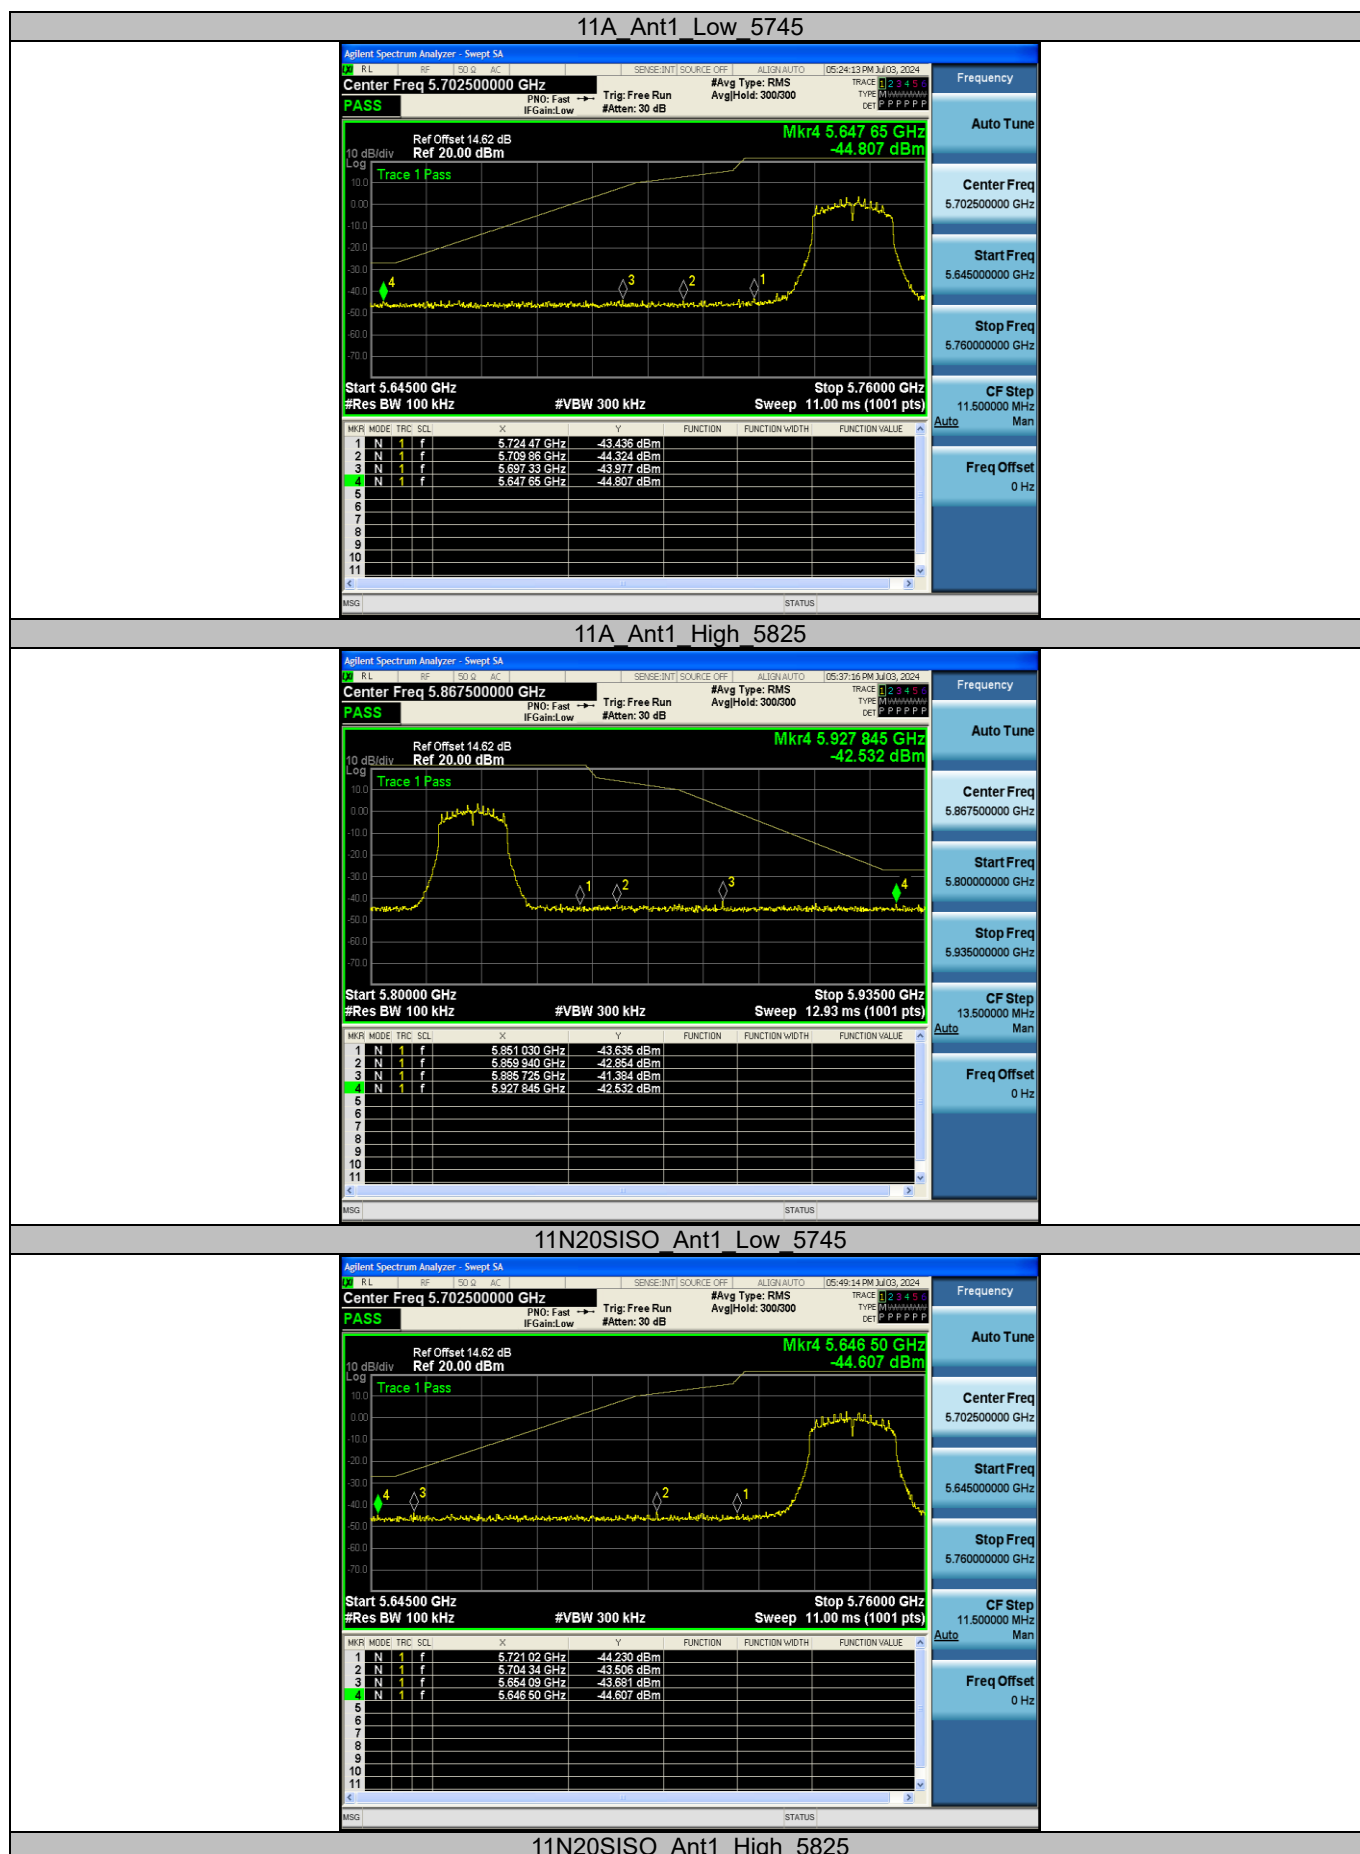


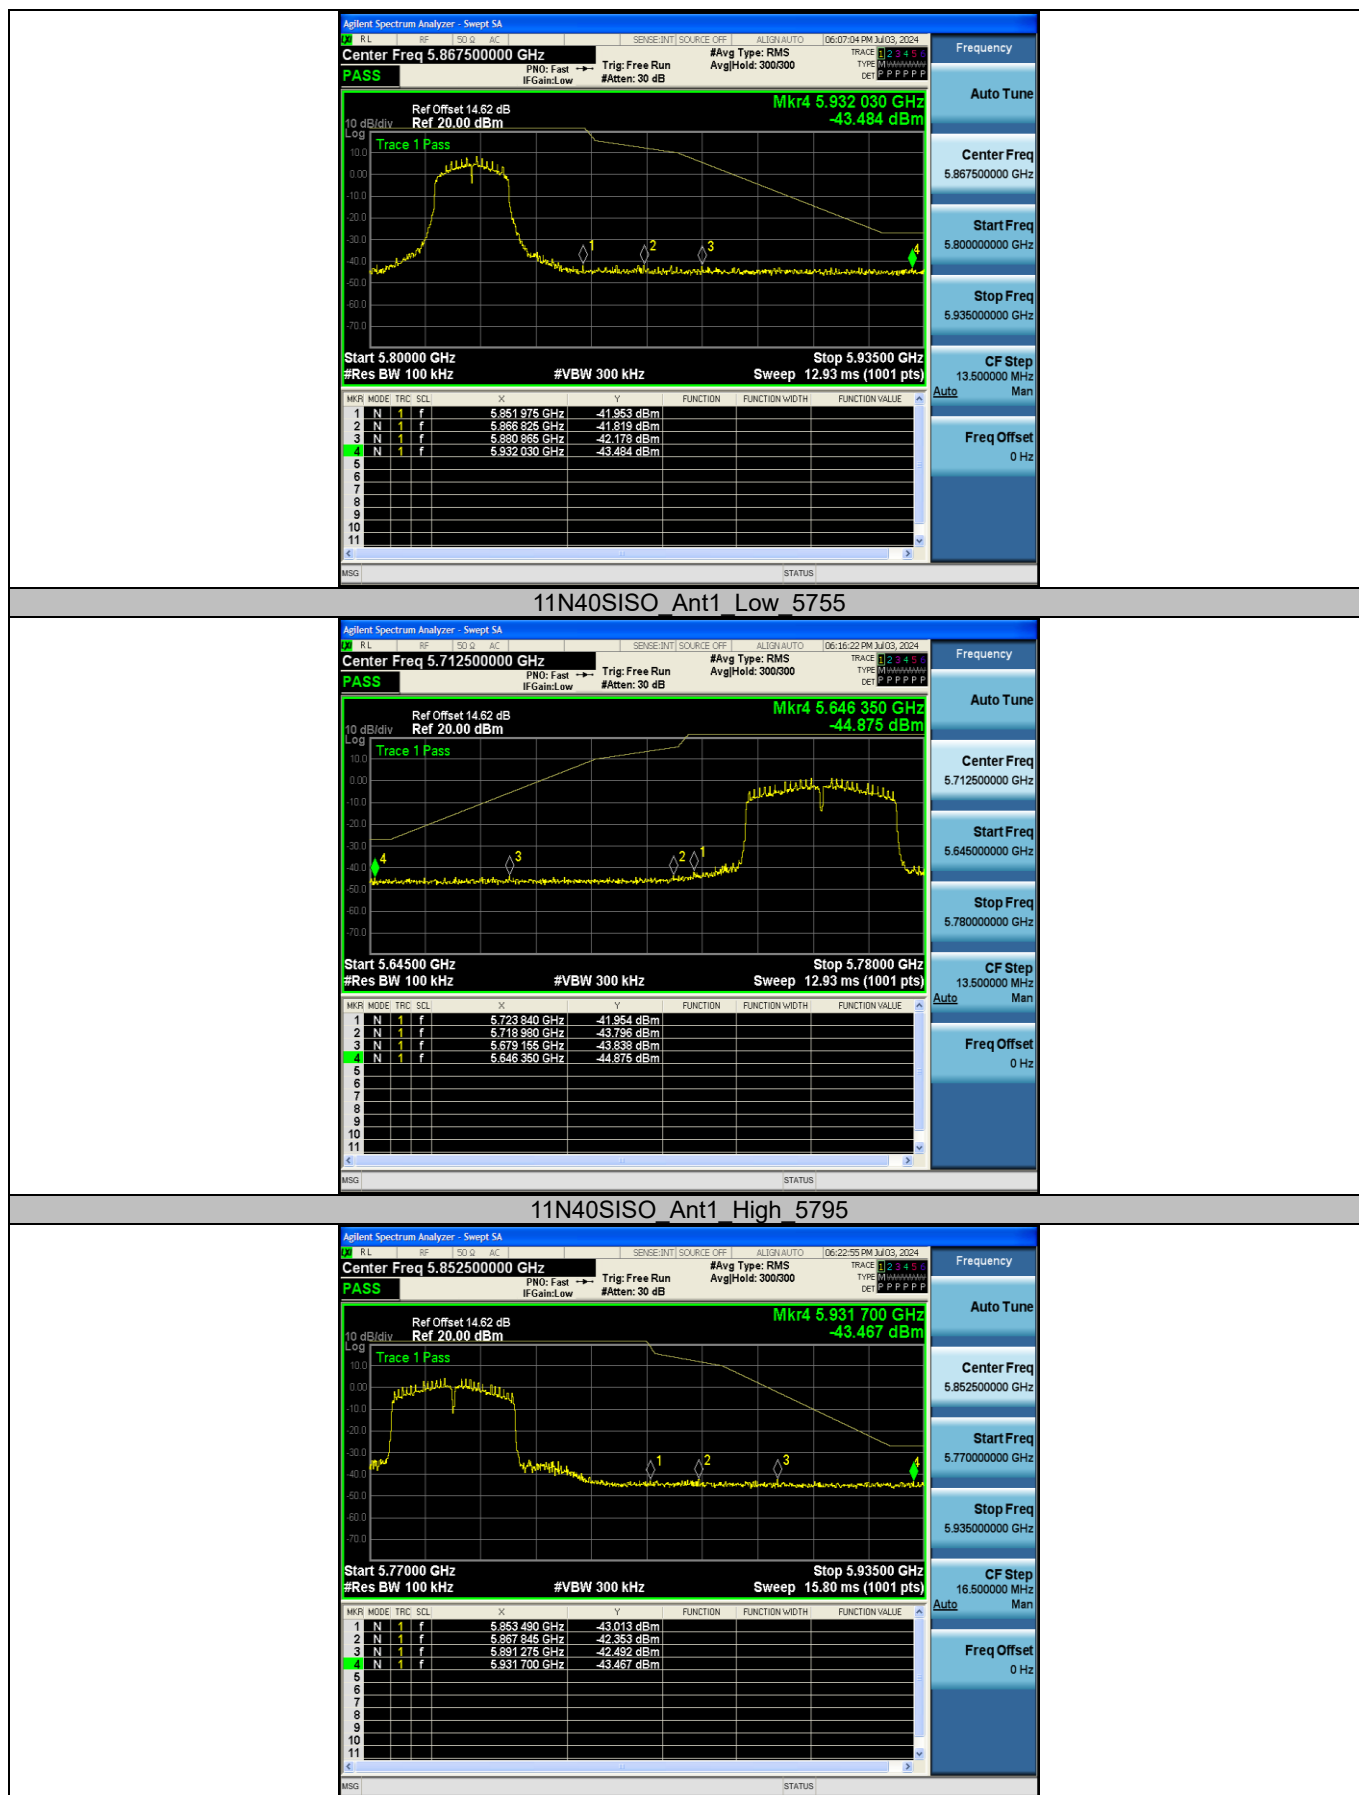



Note: The antenna gain and cable loss is compensated in the test plot.


Appendix F: Conducted Spurious Emission


Test Graphs

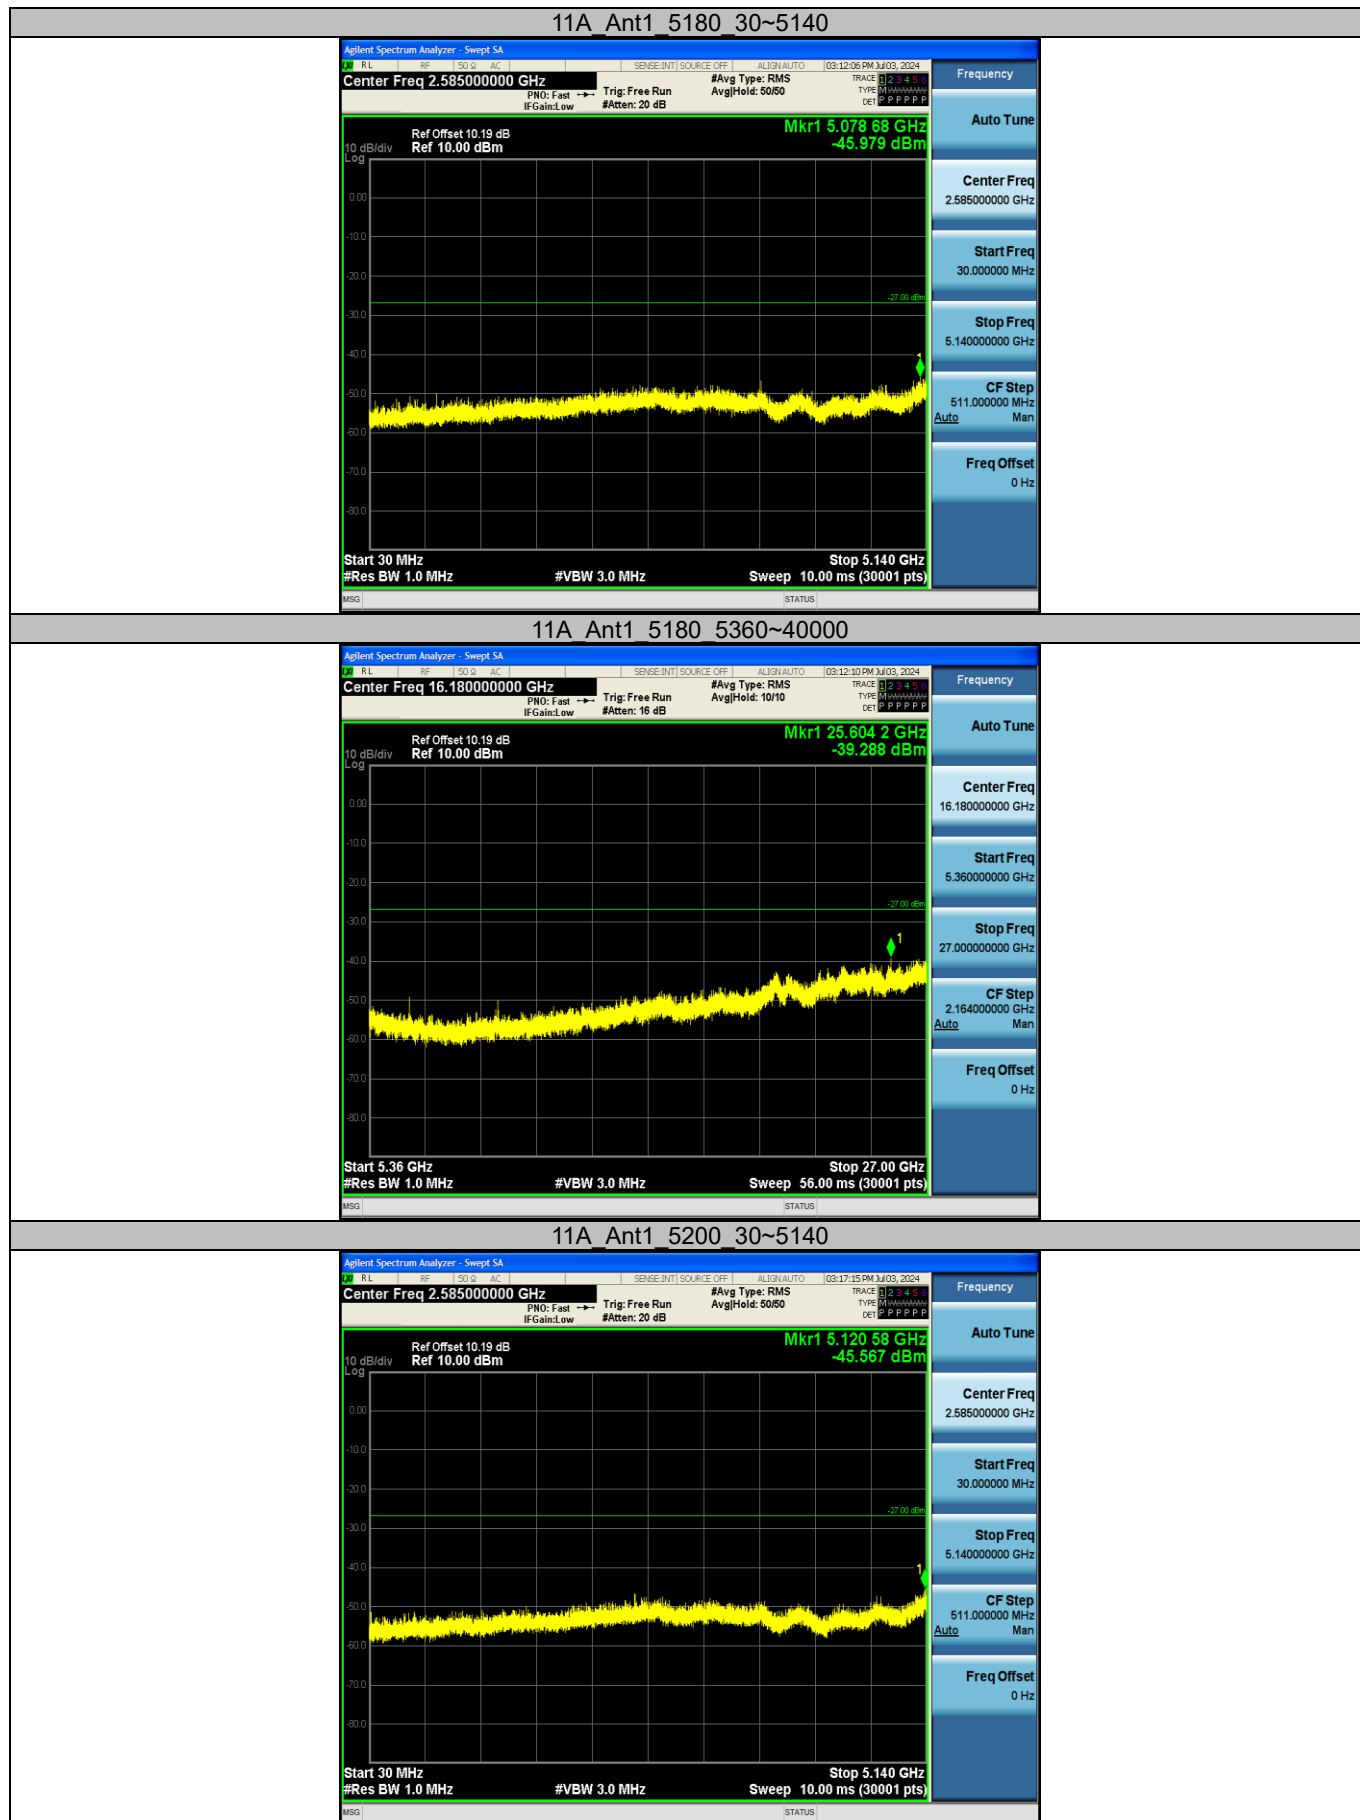


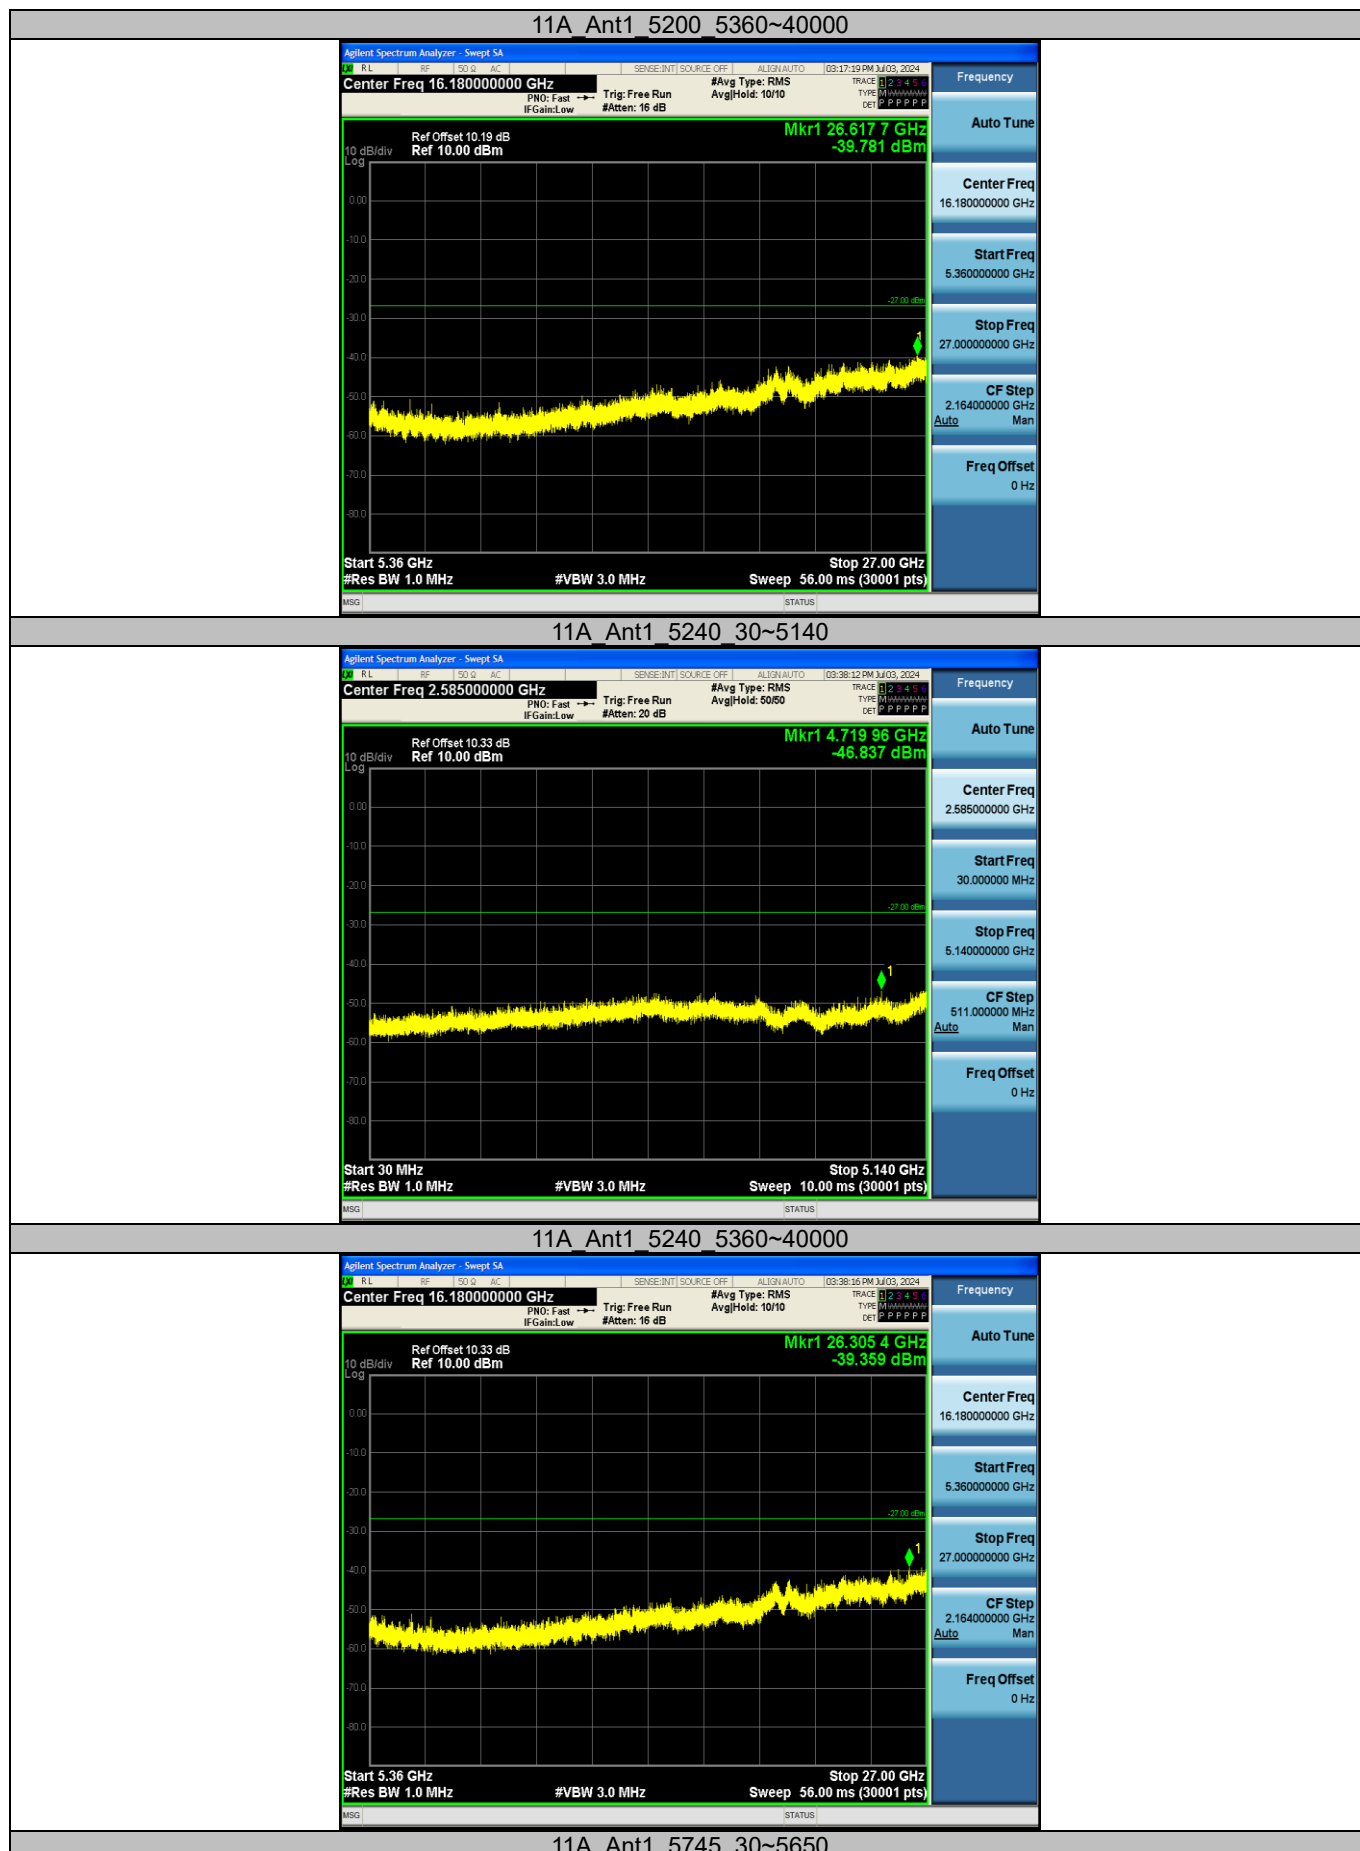


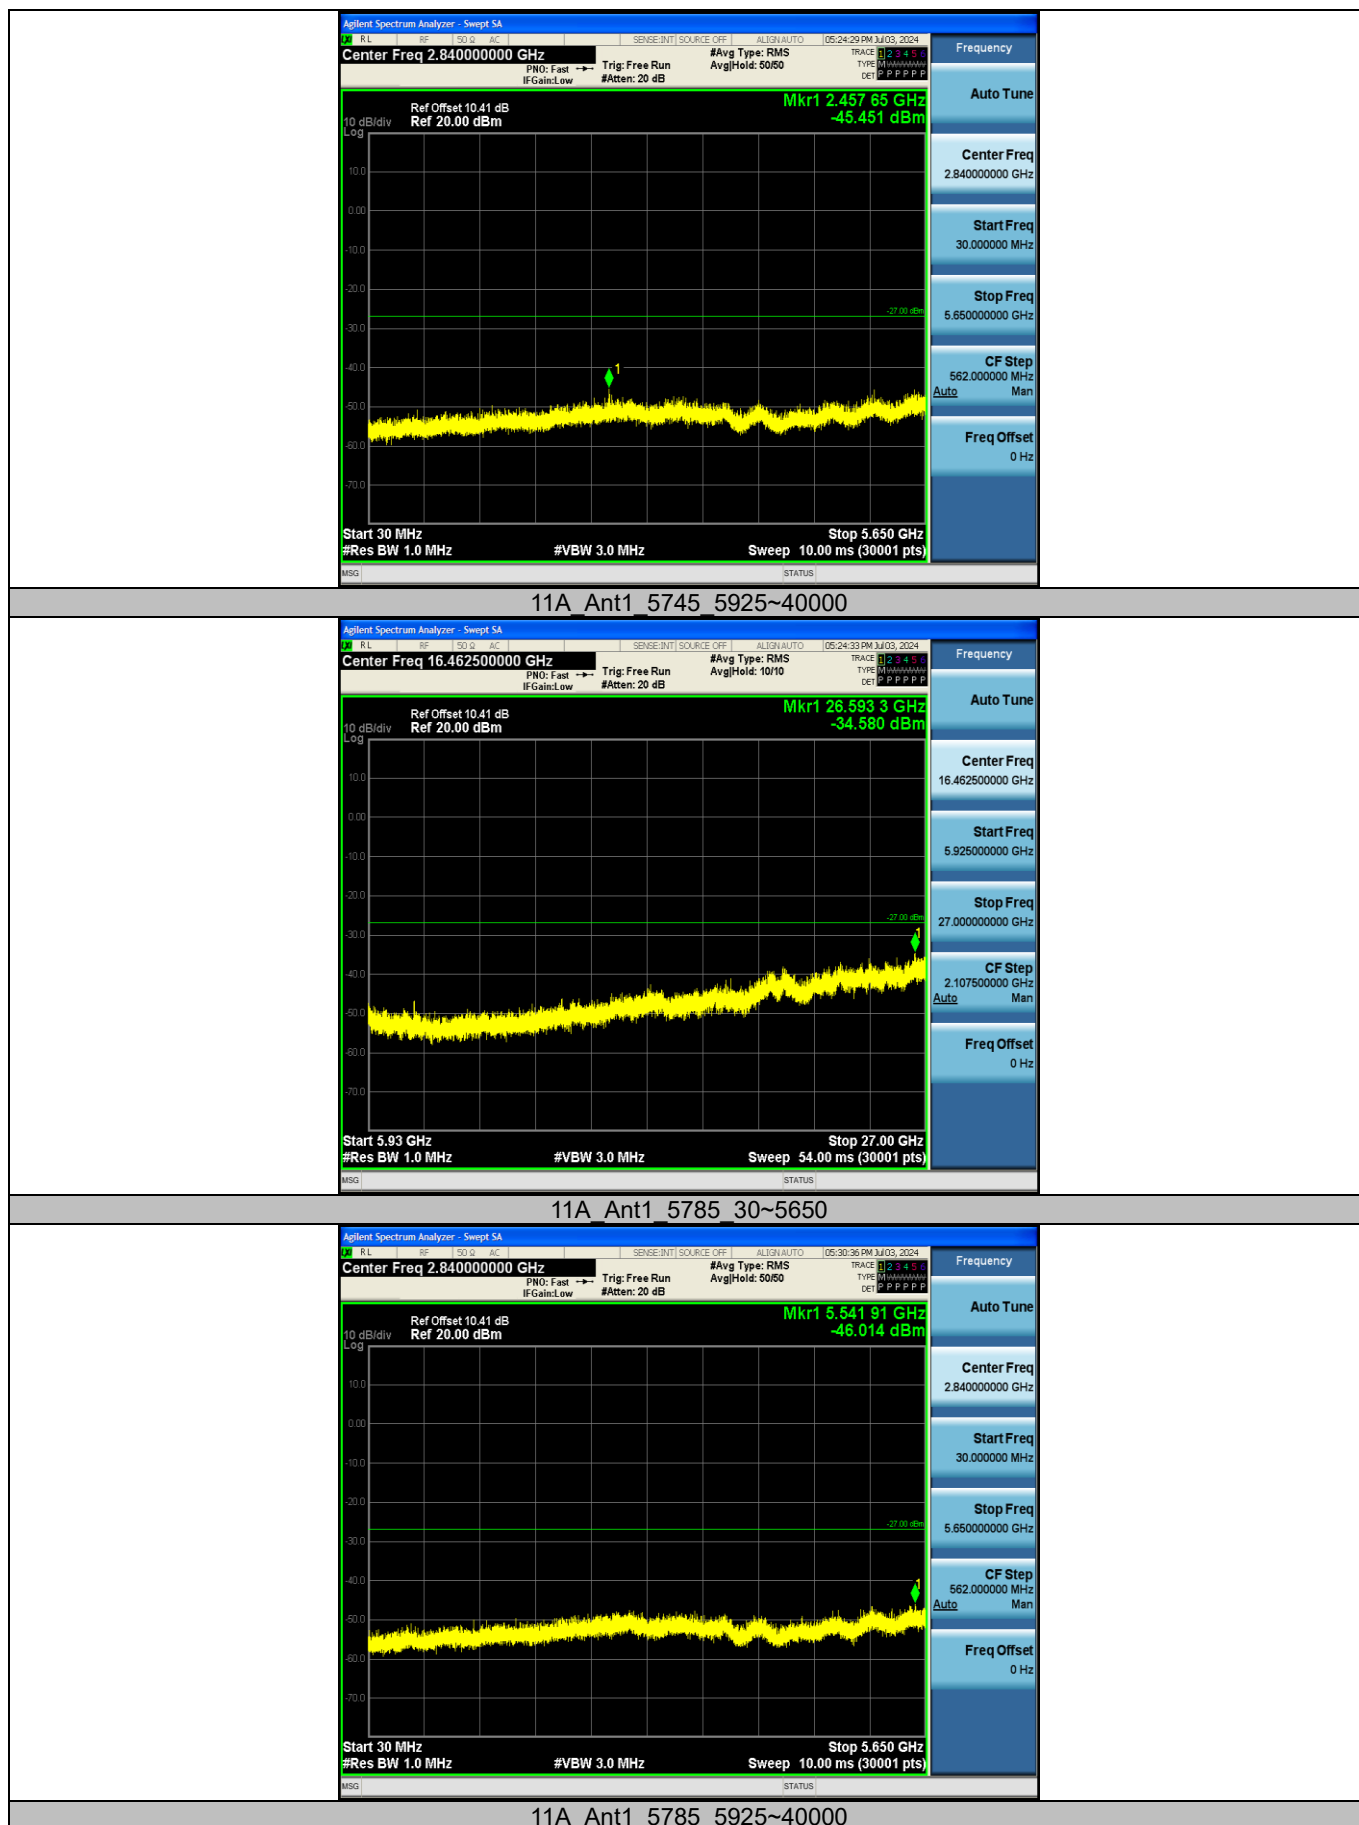


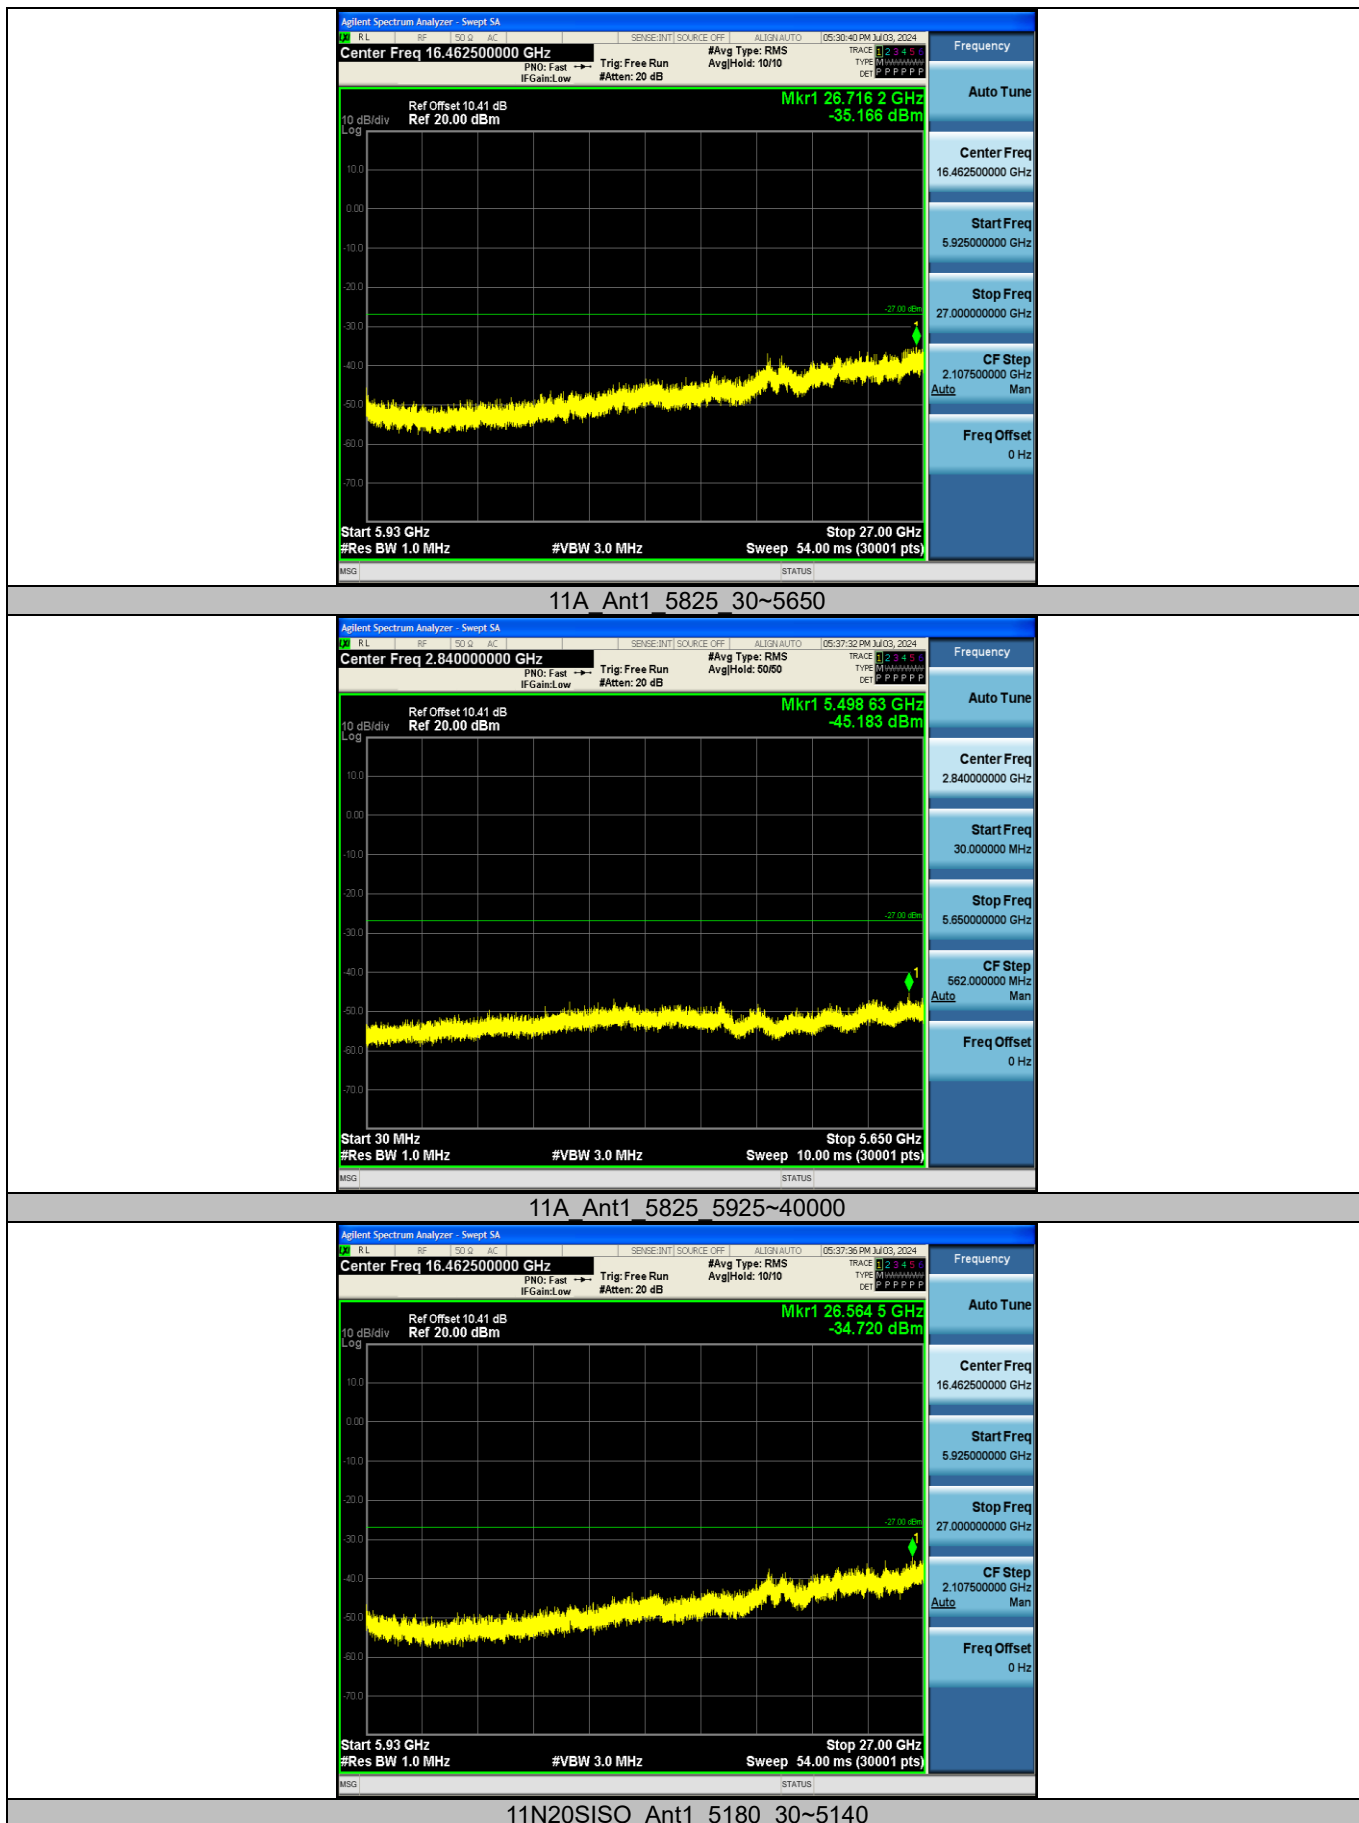


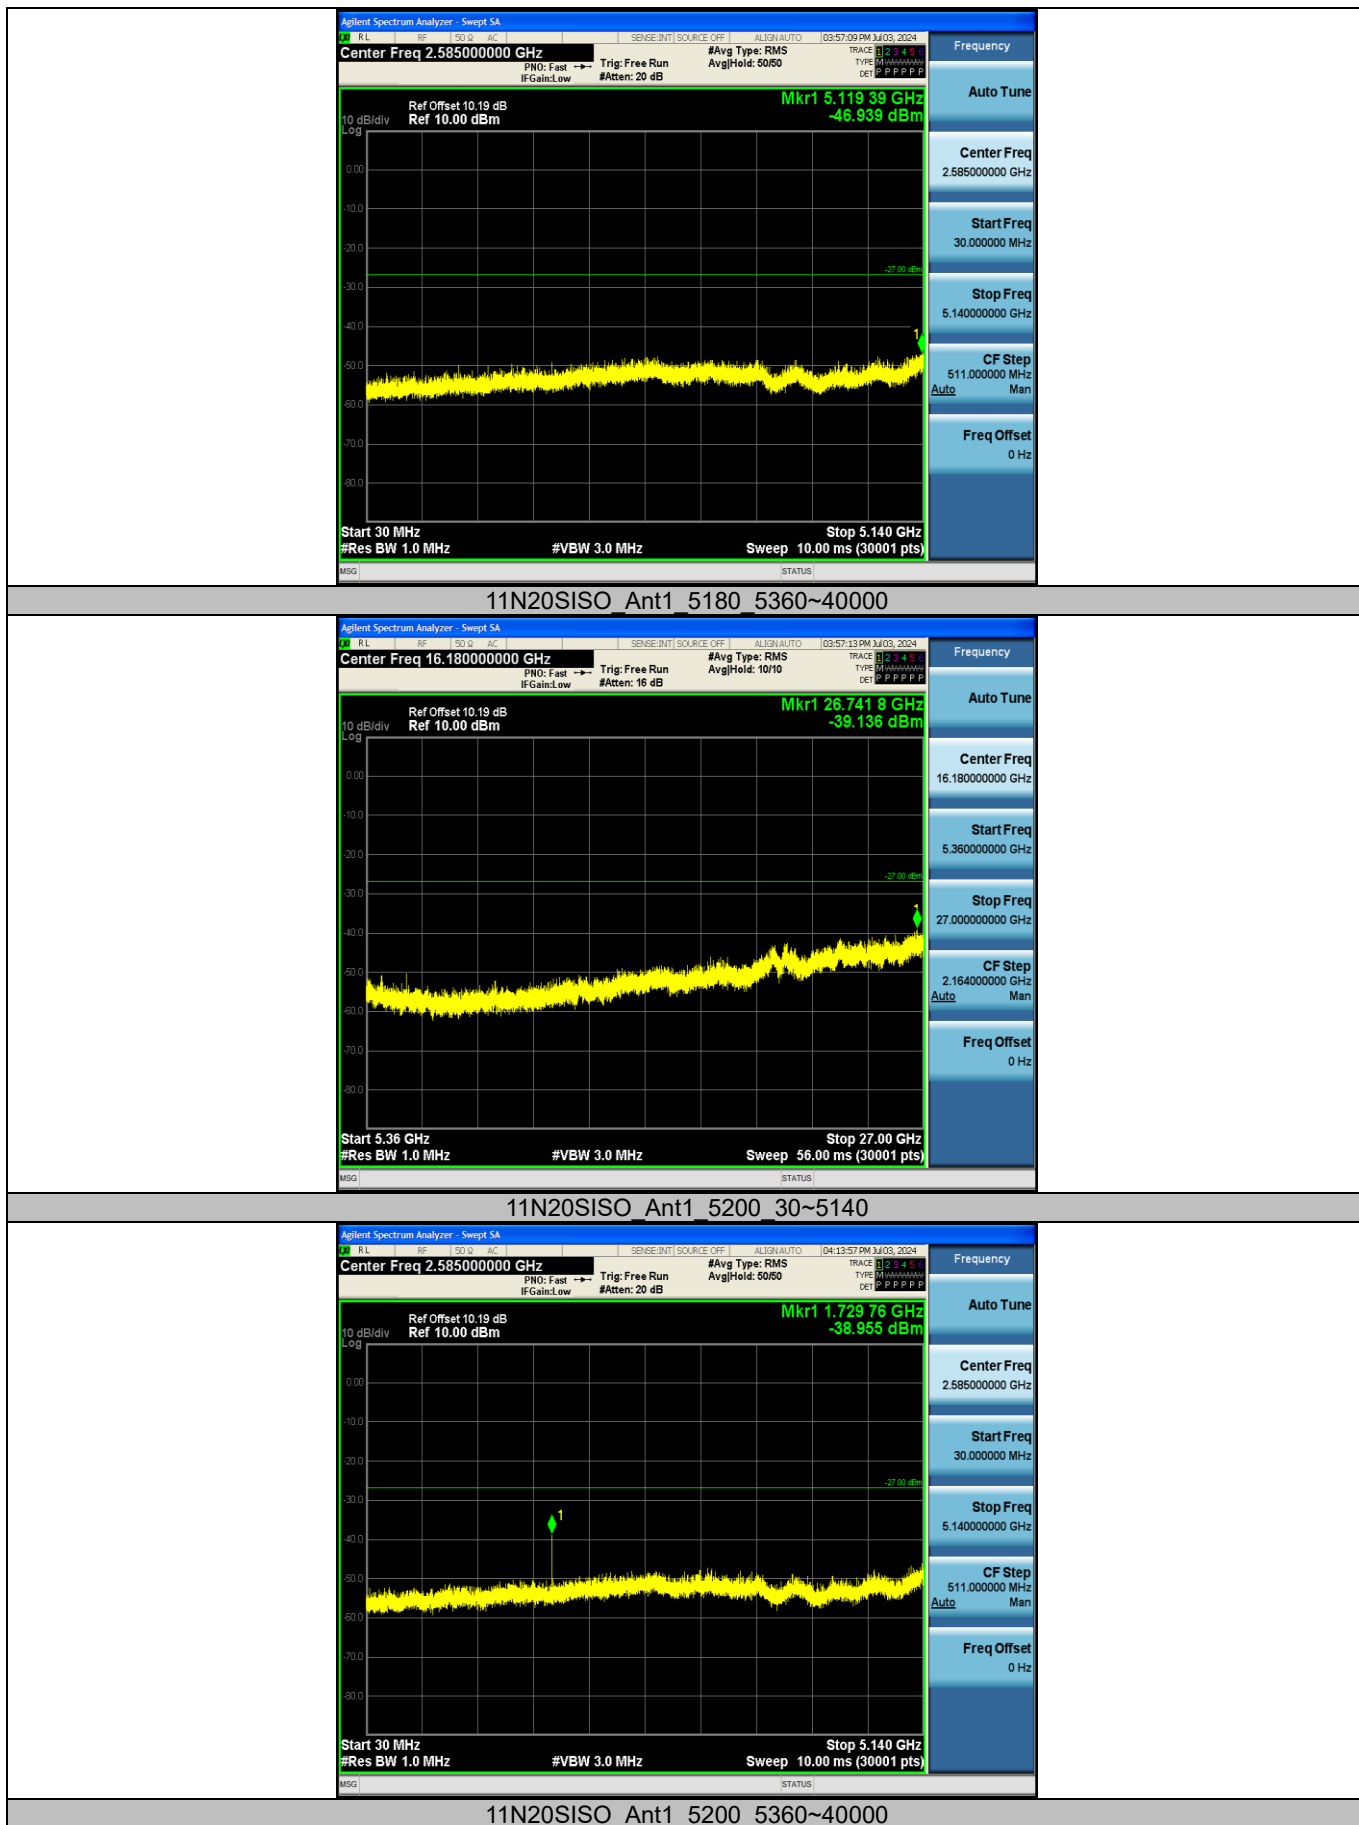


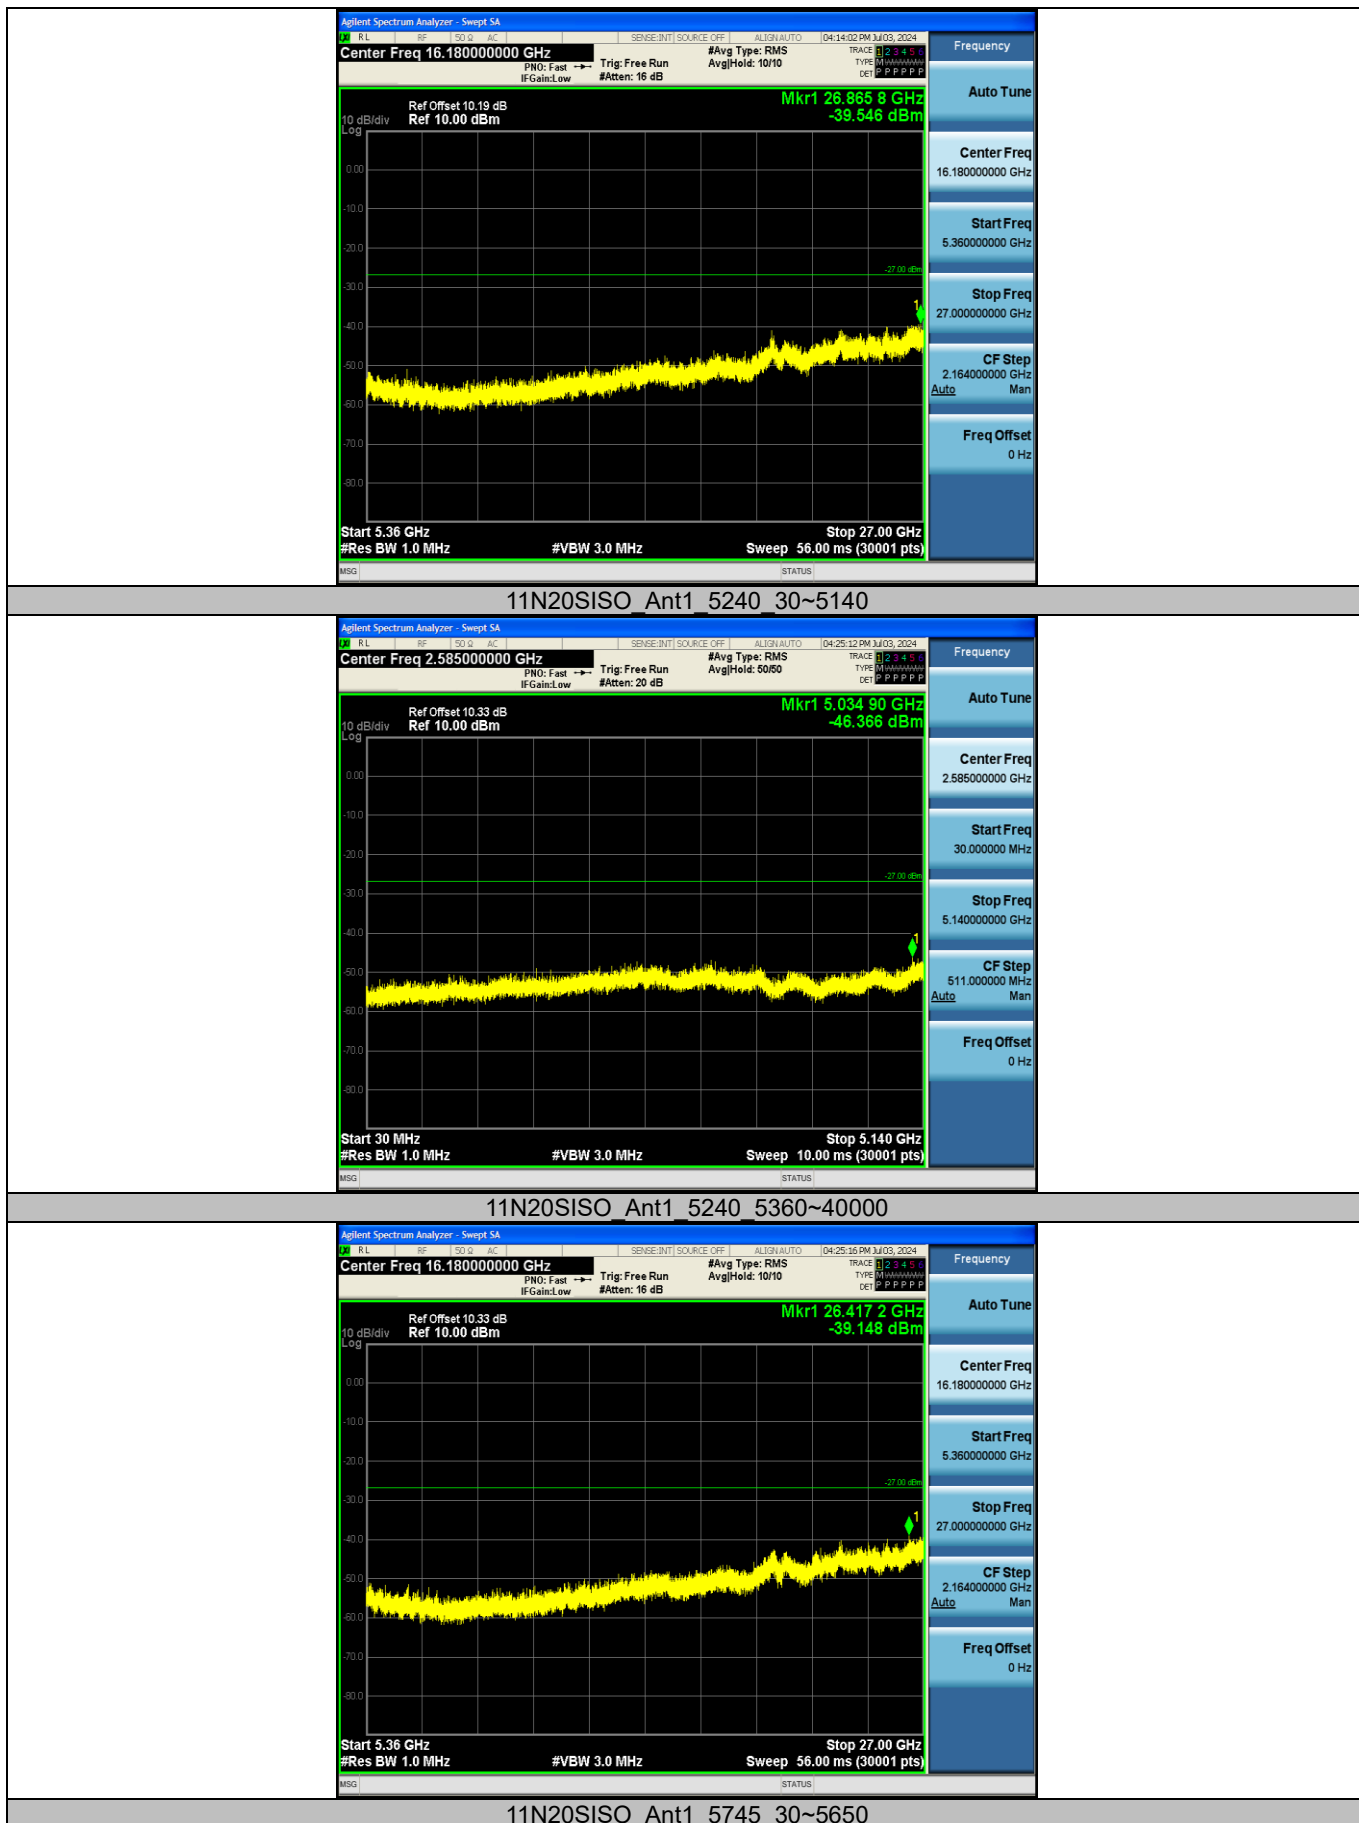


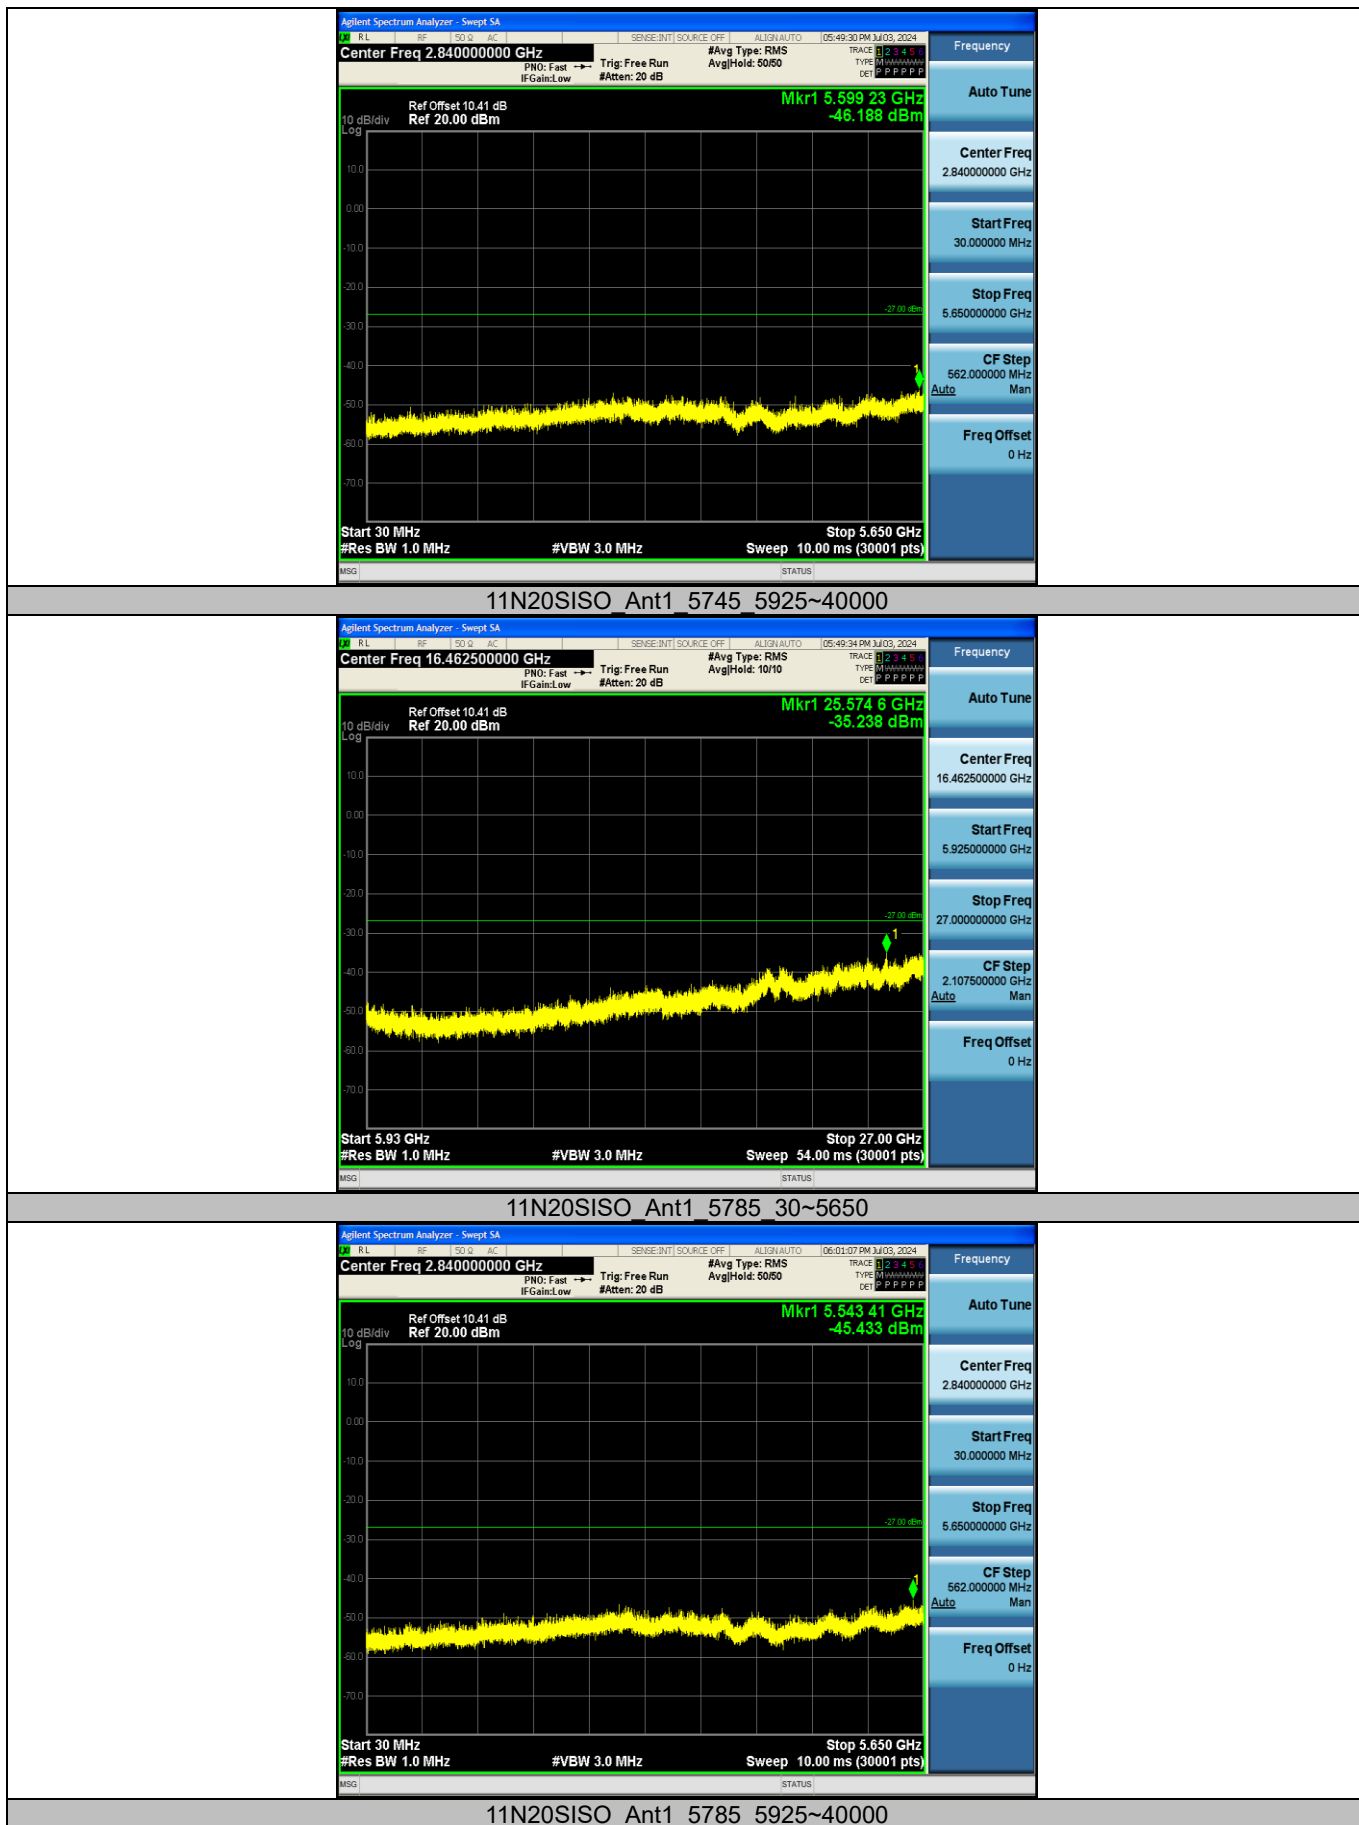

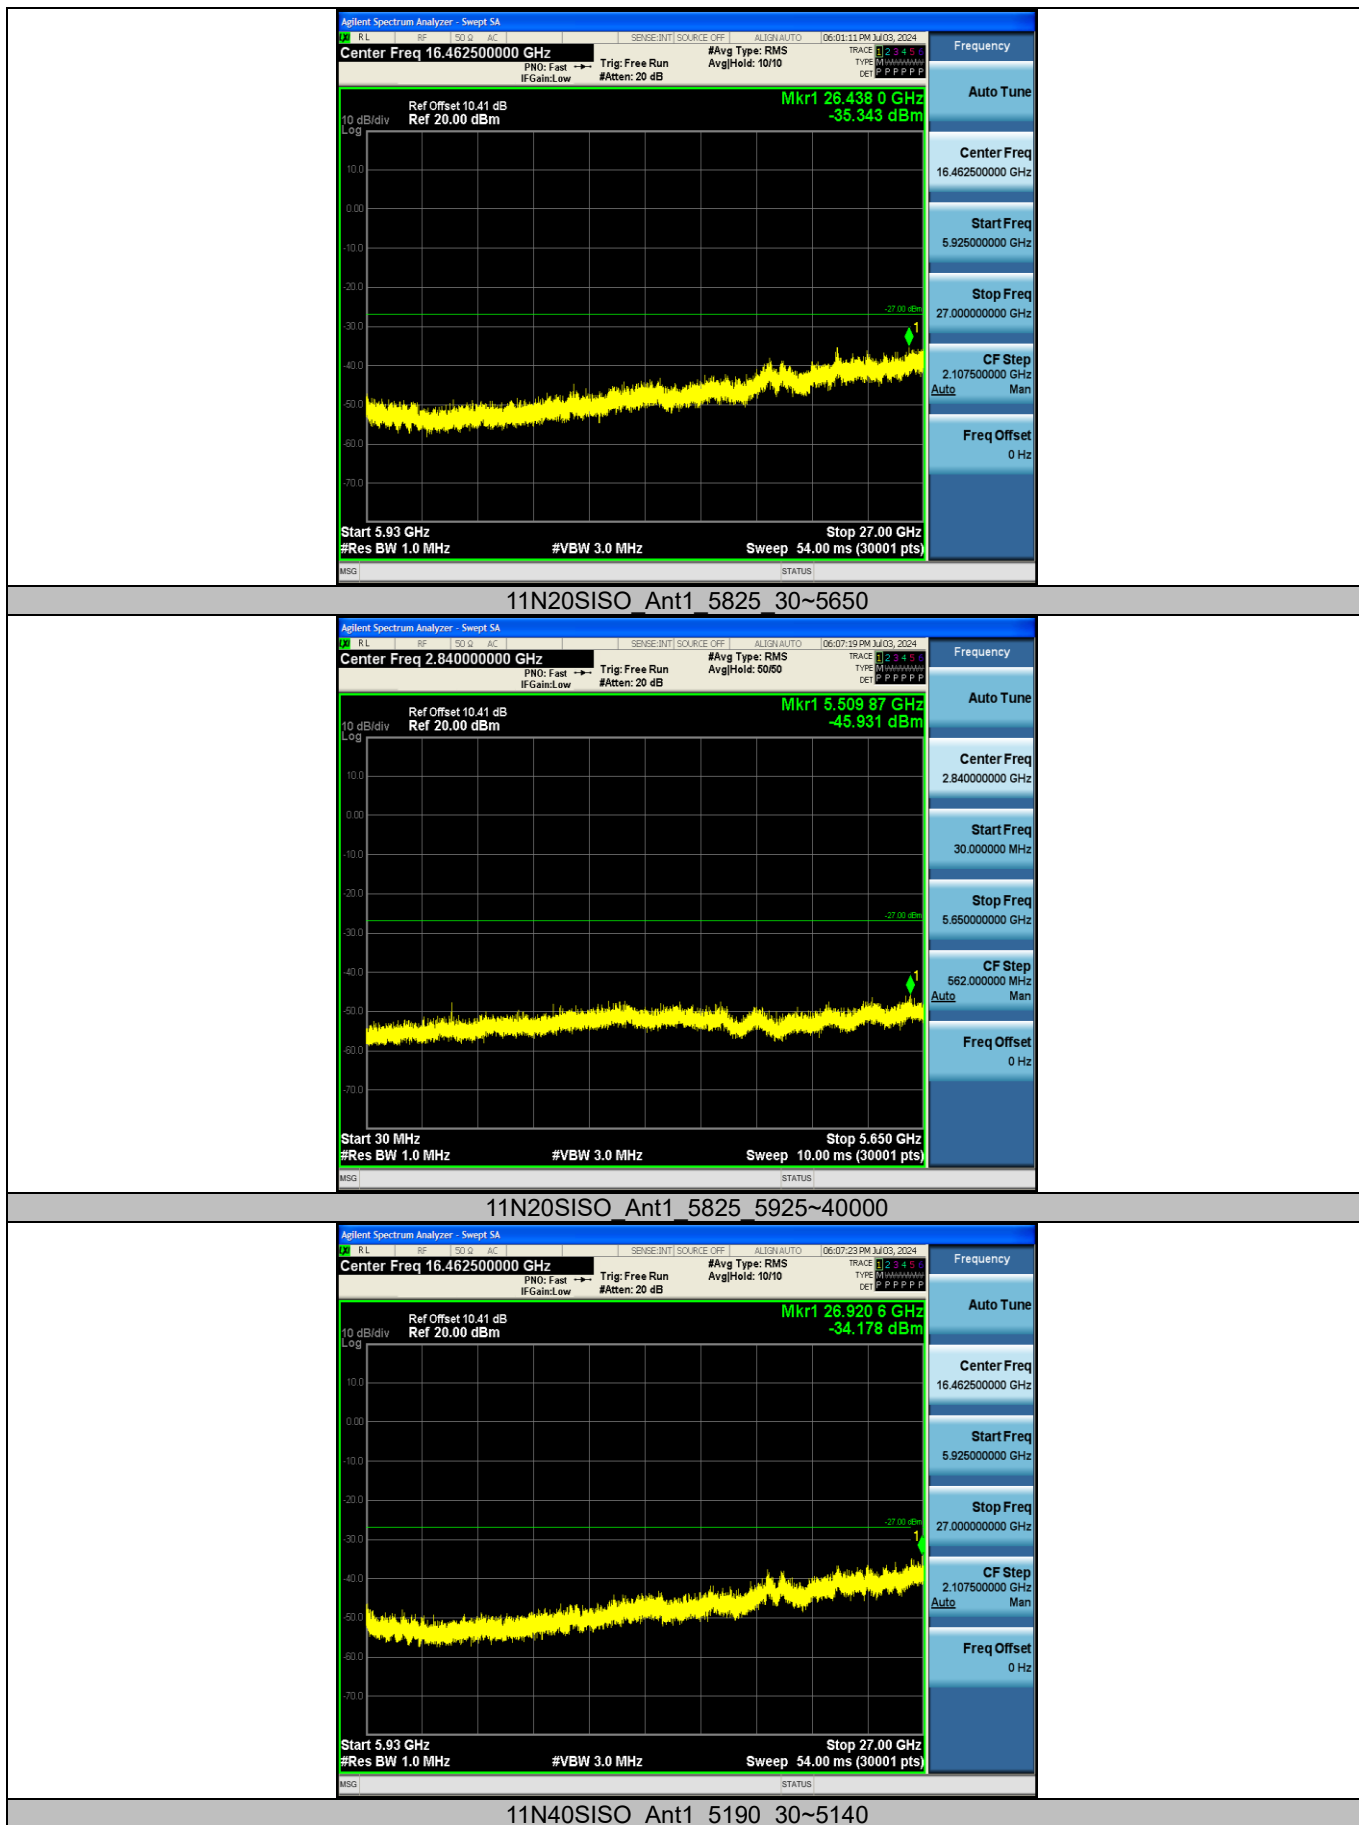

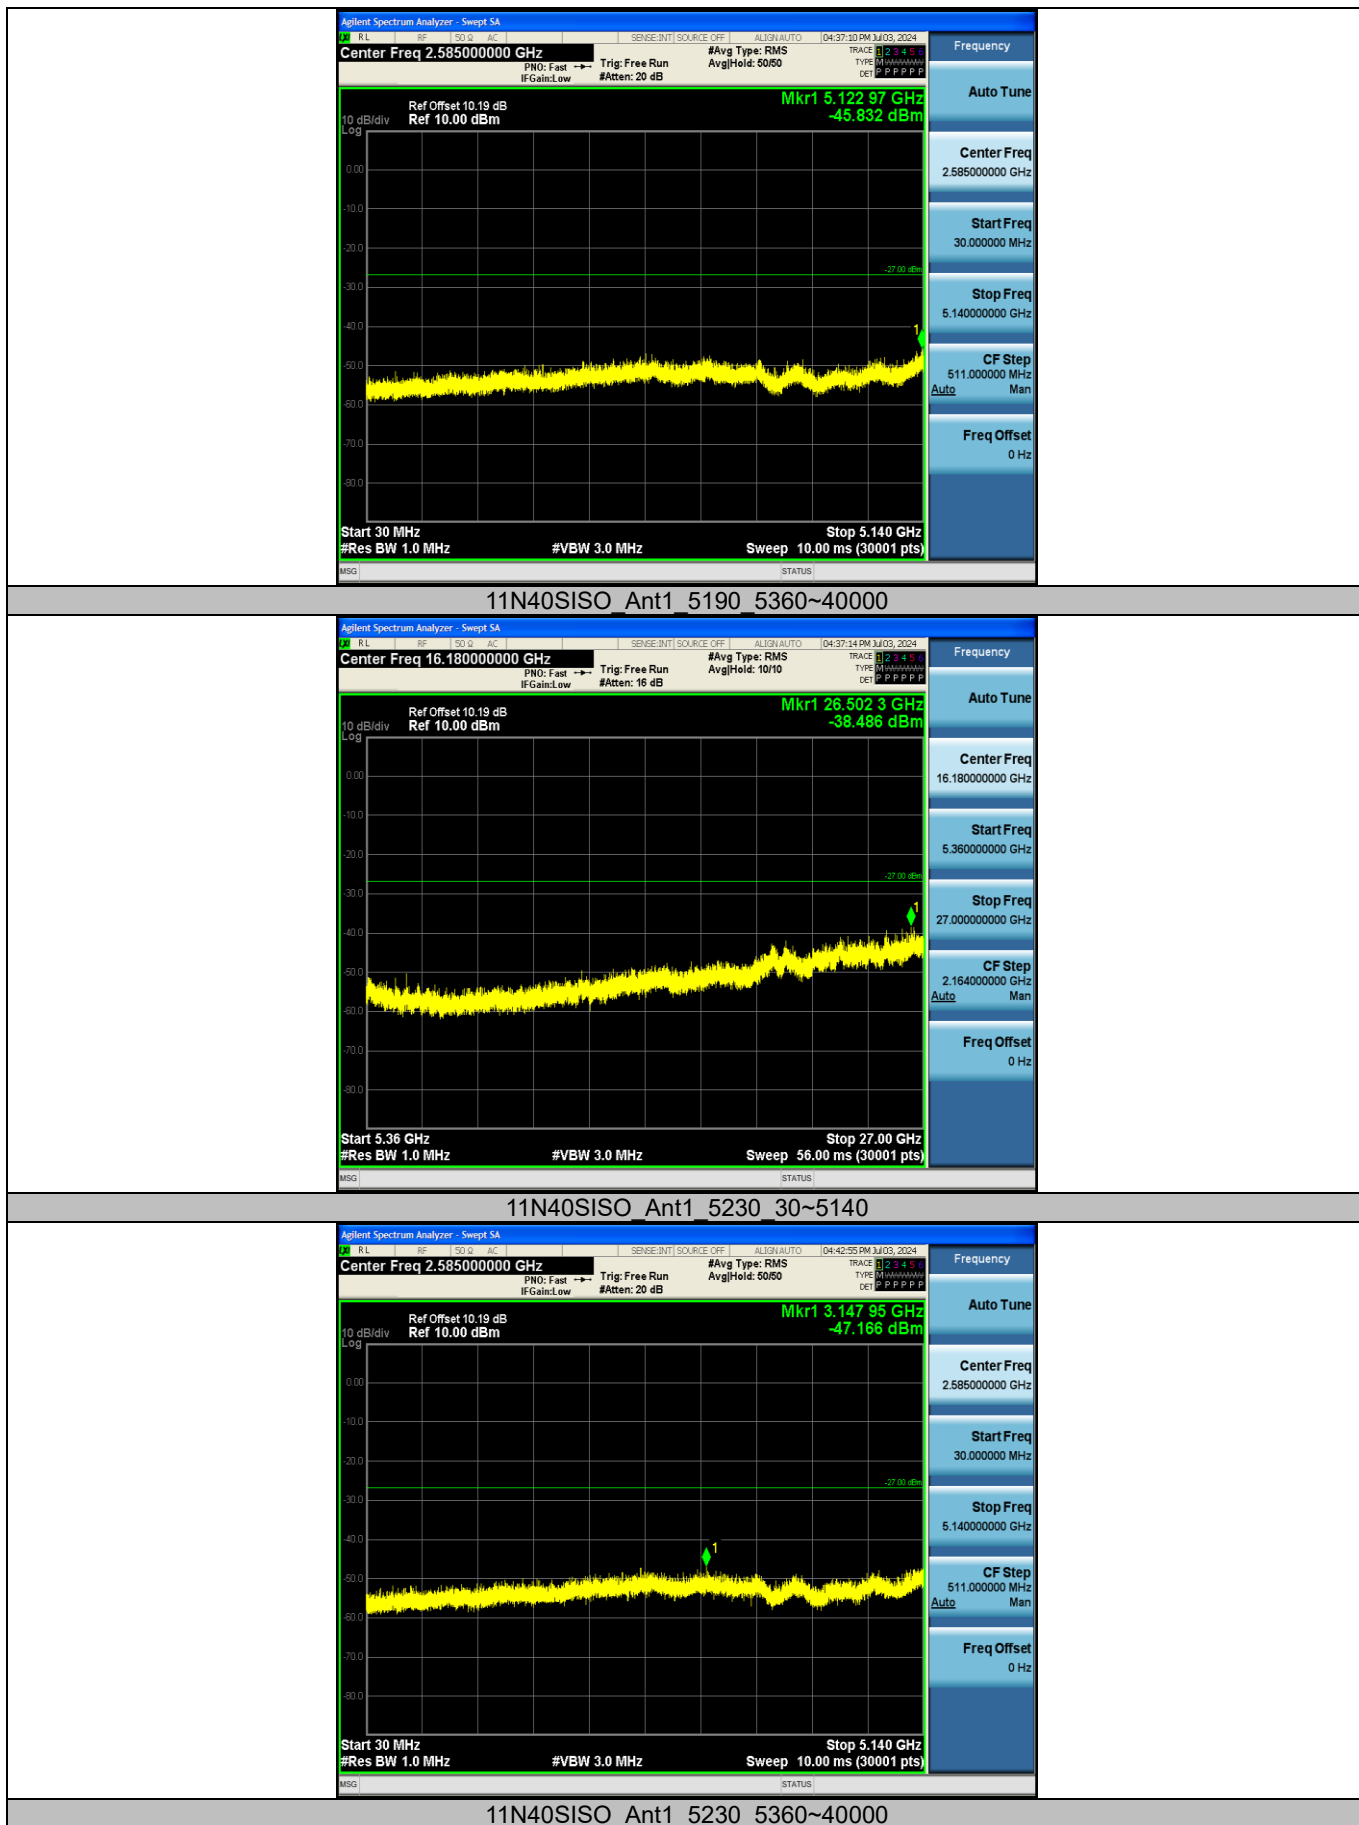

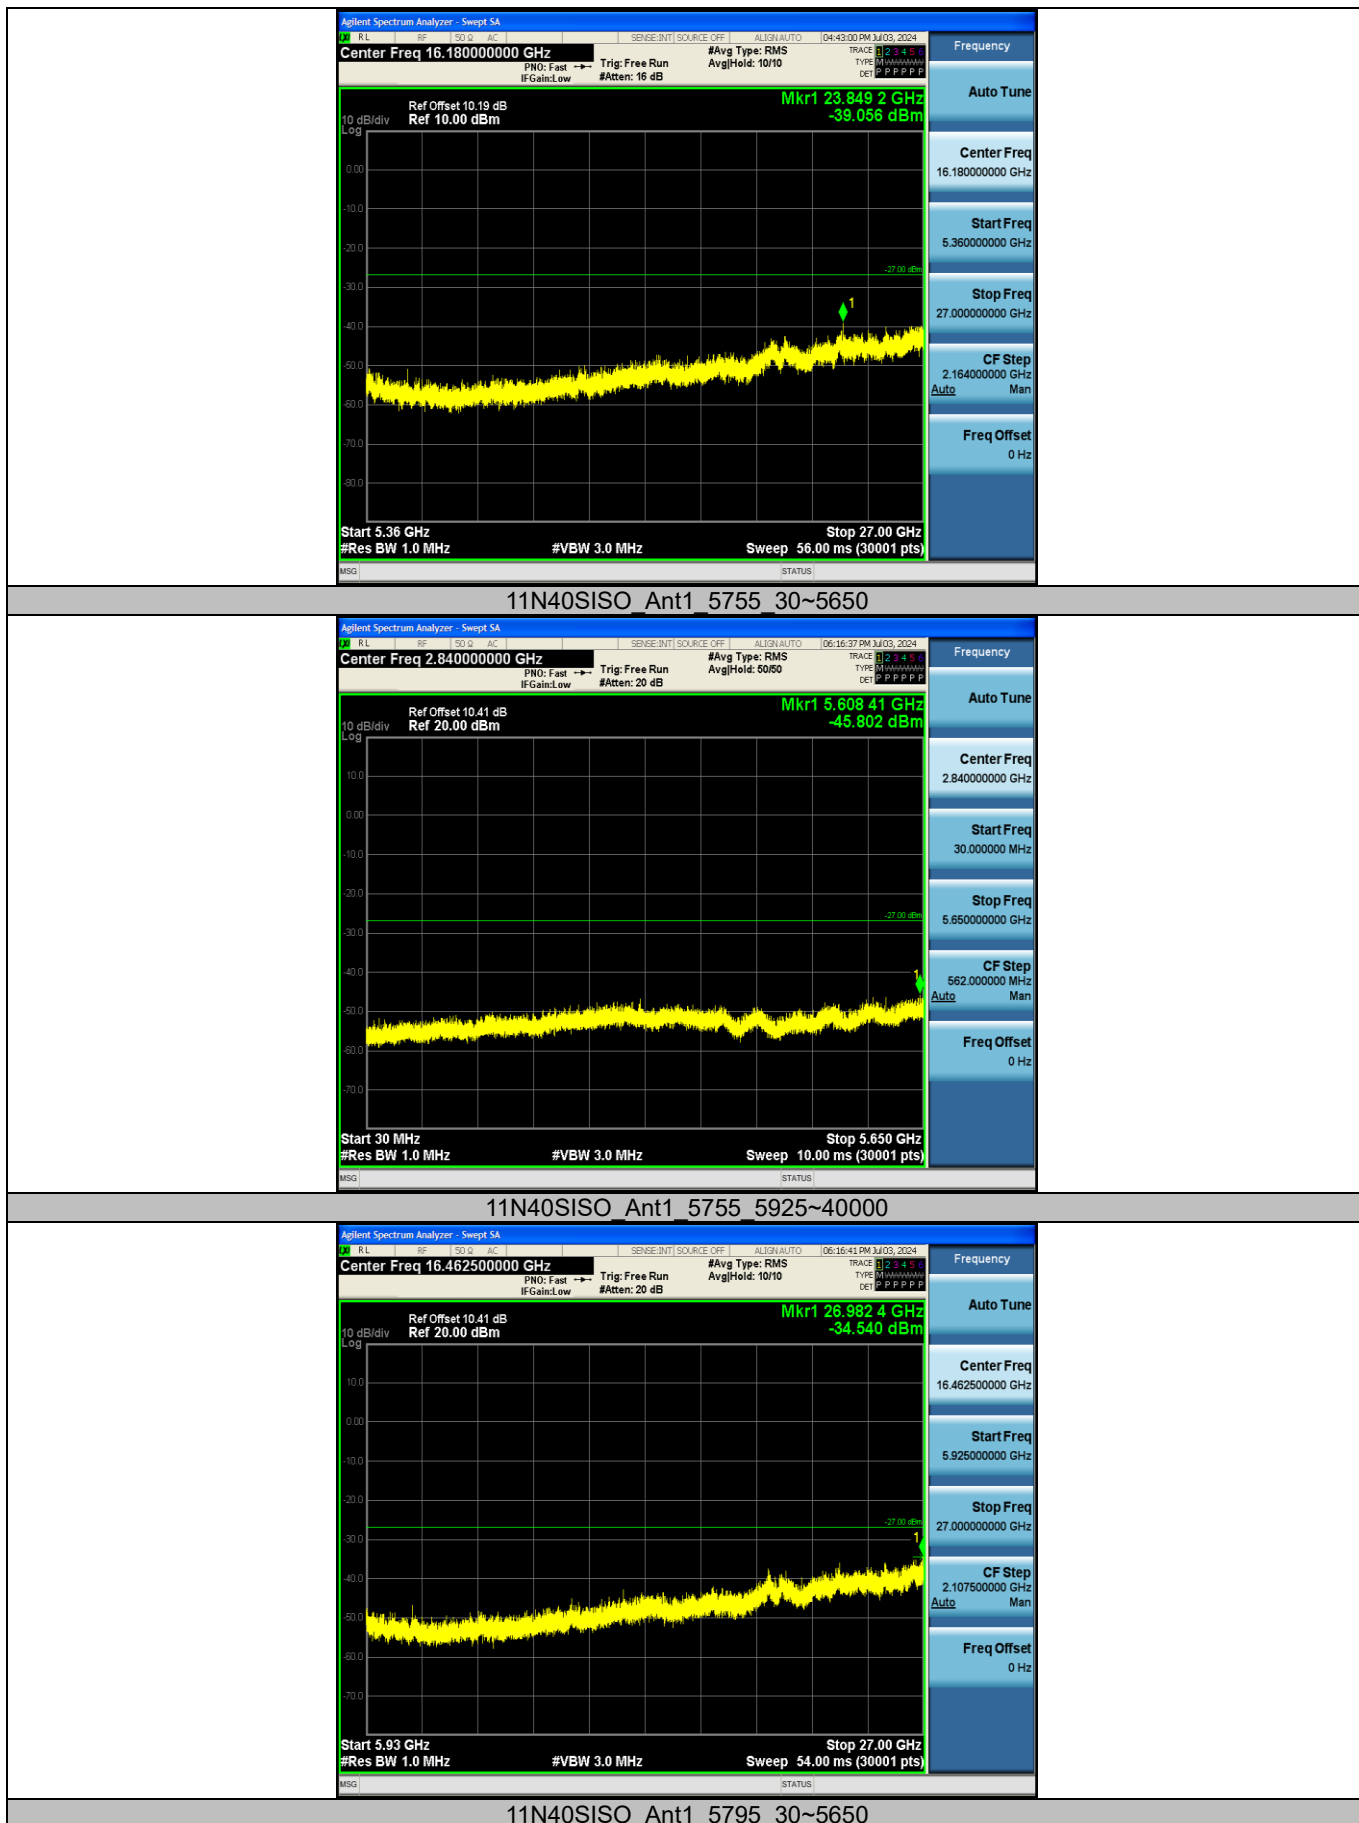

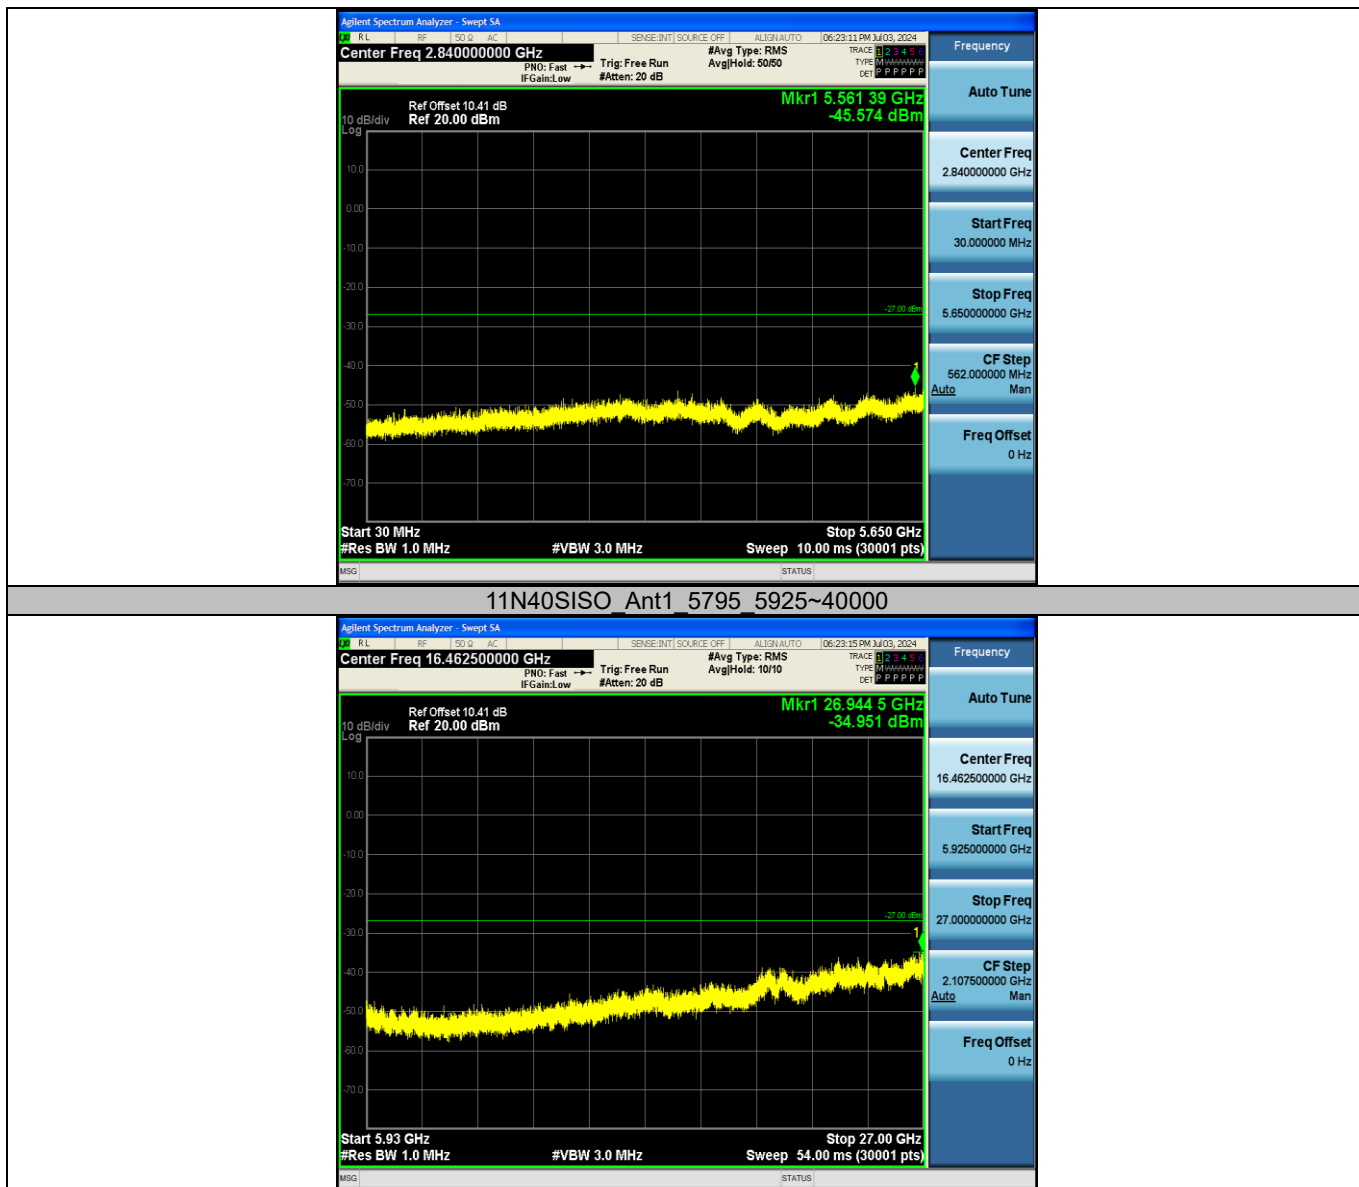

Note:

1. The antenna gain and cable loss is compensated in the test plot.
2. Test frequency are from 1GHz to 40GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.

----End of Report----