


# PORTRABLE PROJECTOR USER'S GUIDE

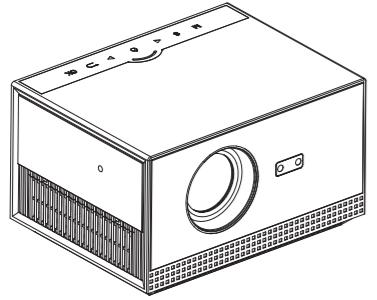

Before using the projector, please read this user manual carefully and keep it for future use.

## CAUTIONS


- Be sure to use the standard power adapter of the device, as improper use of the power supply can cause serious damage to the device.
- If you do not use the device for a long time, please ensure that the power is turned off.
- Avoid foreign matters entering or blocking the fan outlet to avoid affecting the fan operation.
- Please do not directly power off or shut down the device while it is in working condition.
- When connecting external devices with high power consumption, please confirm whether the power consumption can be supported.
- Do not attempt to repair this product yourself. If the product or its power supply experiences any malfunction or damage, cease use immediately and contact the distributor for support.
- This sign warns the user that there is voltage inside the unit that has not been insulated, which may cause surface magnetic fields and cause electric shock. Therefore, it is very dangerous to come into contact with the internal components of the unit.

**WARNING**  
To prevent fire or electric shock, do not expose this unit to rain or moisture.

.01.

## COMPONENTS


Please check whether the contents of the package are complete. If there are any omissions, please contact the distributor to reissue.

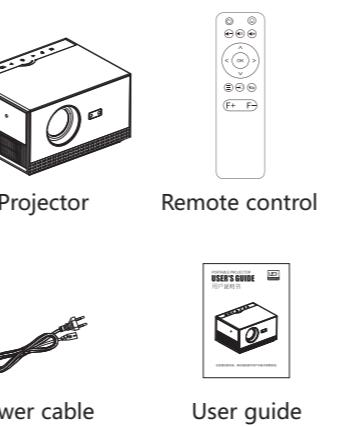

.02.

## ATTENTION


The following safety instructions ensure that this function maintains a long service life and prevents fire or electric shock.

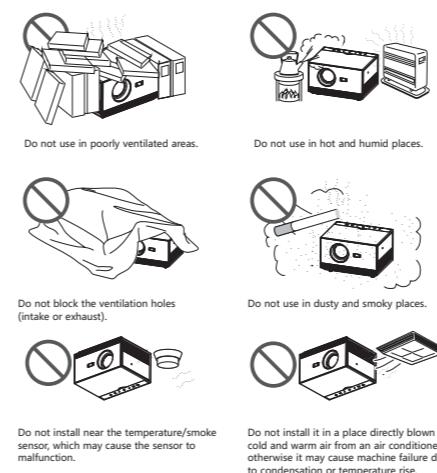

.03.

## CAUTIONS


To maintain the performance and reliability of the projector, please leave at least 30 centimeters of space between the projector and surrounding objects.

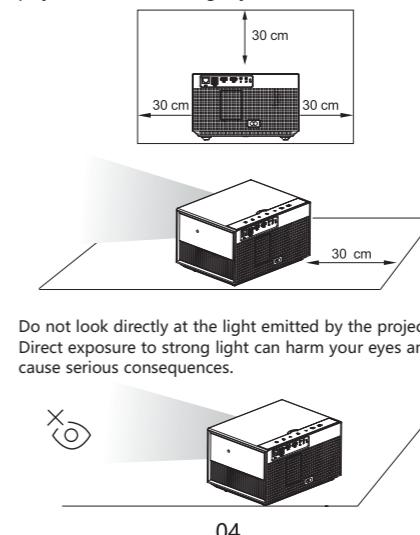

.04.


## INSTALLATION

In order to achieve a better viewing experience, we recommend that you choose the following installation method.

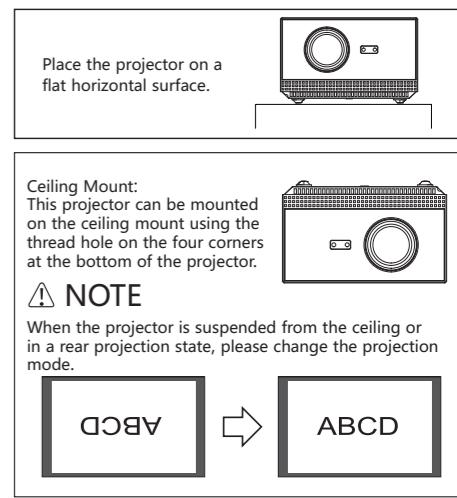


.05.

## OVERVIEW

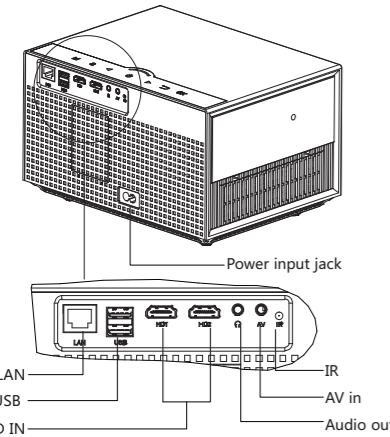


.06.

## OVERVIEW

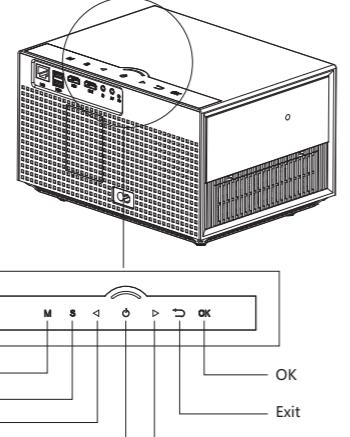


.07.

## DEVICES

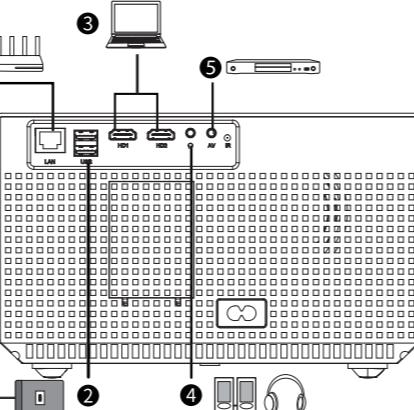


.08.

## REMOTE CONTROL

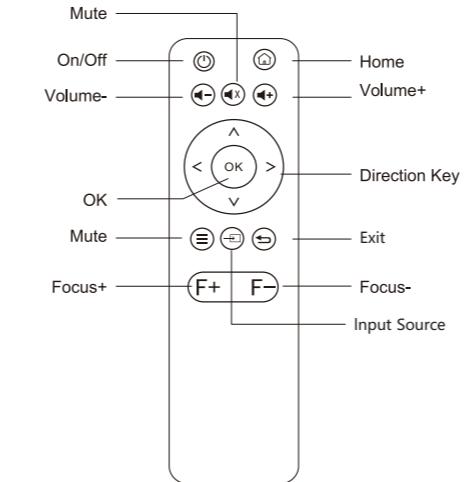


.09.

## Projection Size & Distance

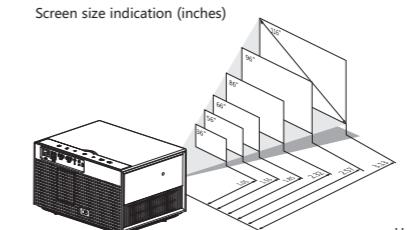

Unit:M

Screen size (inch)	Screen size W x H (M)	Projection distance (M)
43inch	0.96 x 0.53 M	1.38M
56inch	1.25 x 0.70 M	1.77M
66inch	1.48 x 0.83 M	2.08M
86inch	1.90 x 1.04 M	2.67M
96inch	2.15 x 1.17 M	2.97M
116inch	2.60 x 1.40 M	3.53M

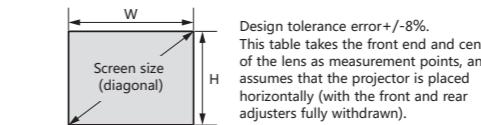

.10.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation configurations of the transmitter and its antenna(s).