

FCC TEST REPORT

FCC ID:2BGQZ-SL-1

Product : Wireless receiving and transmitting system
Model Name : SL-1, SL-2, SL-3, SL-22, SL-44, SL-4, SL-66, SL-8, SL-88, SL-6, T8, T9, MA5, MA7
Brand : N/A
Report No. : NCT24020233E

Prepared for

Jiduobao Acoustic Technology Co., LTD
No. 133, Beijiao Industrial Zone, Enping City, China

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

**A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China**

TEL: 400-8868-419

FAX: 86-755-27790922

TEST RESULT CERTIFICATION

Applicant's name : Jiduobao Acoustic Technology Co., LTD
Address : No. 133, Beijiao Industrial Zone, Enping City, China
Manufacture's name : Jiduobao Acoustic Technology Co., LTD
Address : No. 133, Beijiao Industrial Zone, Enping City, China
Product name : Wireless receiving and transmitting system
Model name : SL-1, SL-2, SL-3, SL-22, SL-44, SL-4, SL-66, SL-8, SL-88, SL-6, T8, T9, MA5, MA7
Standards : FCC CFR47 Part 15 Section 15.236
Test procedure : ANSI C63.10:2013
Date of test : May 16, 2024-Jun 12, 2024
Date of Issue : Jun 13, 2024

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:



Keven Wu / Engineer

Technical Manager:


Henry Wang / Manager

Table of Contents	Page
TEST RESULT CERTIFICATION	2
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	14
4.1.3 DEVIATION FROM TEST STANDARD	14
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	14
4.2.1 RADIATED EMISSION LIMITS	17
4.2.3 TEST SETUP	18
4.2.4 TEST PROCEDURE	18
4.2.5 TEST RESULTS	18
5. MAXIMUM RADIATED POWER(EIRP)	23
5.1 APPLIED PROCEDURES / LIMIT	23
5.2 TEST PROCEDURE	23
5.3 DEVIATION FROM STANDARD	23
5.4 TEST SETUP	23
5.5 EUT OPERATION CONDITIONS	23
5.6 TEST RESULTS	24
6. CHANNEL BANDWIDTH	26
7. NECESSARY BANDWIDTH	29
7.1 LIMIT	29
7.2 TEST SETUP	30

7.3 TEST PROCEDURE	30
7.4 TEST RESULTS	31
8. FREQUENCY STABILITY	35
9. TEST PHOTO & EUT PHOTO	37

1. VERSION

Report No.	Version	Description	Approved
NCT24020233E	Rev.01	Initial issue of report	Jun 13, 2024

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.236) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.203	Antenna Requirement	N/A	
15.207	Conducted Emission	PASS	
15.236(d)(1)	Maximum Radiated Power(EIRP)	PASS	
15.236(g)	Radiated Spurious Emission Measurement	PASS	
15.236(g)	Spurious Emission at Antenna Port	PASS	
15.236(f)(2)	Occupied Bandwidth Emission	PASS	
15.236(f)(3)	Frequency Stability	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately 95 %.

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9KHz~30MHz)	$\pm 4.51\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

3.GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless receiving and transmitting system
Model Name	SL-1
Serial Model	SL-2, SL-3, SL-22, SL-44, SL-4, SL-66, SL-8, SL-88, SL-6, T8, T9, MA5, MA7
Model Difference	All the same except the model number
Hardware version	N/A
Software version	N/A
Operation Frequency:	560.5-589.5MHz
Modulation Type:	DQPSK
Antenna Type:	Spring antenna
Antenna Gain:	1.3dBi
Ratings	DC 3.7V by battery(1000mAh) ; Charging input: DC 5V
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.	

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	560.5	09	568.5	17	576.5	25	584.5
02	561.5	10	569.5	18	577.5	26	585.5
03	562.5	11	570.5	19	578.5	27	586..5
04	563.5	12	571.5	20	579.5	28	587.5
05	564.5	13	572.5	21	580.5	29	588.5
06	565.5	14	573.5	22	581.5	30	589.5
07	566.5	15	574.5	23	582.5		
08	567.5	16	575.5	24	583.5		

Note:

1. Test of channel was included the lowest, middle and highest frequency in highest data rate and to perform the test, then record on this report.

	Channel	Frequency(MHz)
Low Channel	01	560.5
Mid Channel	16	575.5
High Channel	30	589.5

3.2 DESCRIPTION OF TEST MODES


For All Emission	
Final Test Mode	Description
Transmitting mode	Keep the EUT in continuously transmitting mode

Note:

(1) Fully-charged battery is used during the test

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Conducted Emission Test



Spurious emissions



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Adapter	OMIX	X2904	04A3650000024	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in «Length» column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2023/6/21	2024/6/20
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2023/6/21	2024/6/20
Amplifi (30MHz-1GHz)	BBV 9743 B	00374	SCHNARZBECK	2023/6/21	2024/6/20
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNARZBECK	2023/3/19	2025/3/18
Pream plifier (1GHz-18GHz)	BBV 9718D	0024	SCHNARZBECK	2023/6/21	2024/6/20
Spectrum Analyze (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2023/6/21	2024/6/20
Pream plifier (15GHz-40GHz)	BBV 9718D	0024	SCHNARZBECK	2023/6/21	2024/6/20
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNARZBECK	2023/6/21	2024/6/20
Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHNARZBECK	2023/6/21	2024/6/20
MXG Signal Analyzer	N9020A	101178	RS	2023/6/21	2024/6/20
MXG Vector Signal Generator	N5182A	MY50510202	Agilent	2023/6/21	2024/6/20
MXG Analog Signal Generator	N5181A	00374	SCHWARZBECK	2023/6/21	2024/6/20
Power Sensor	TR1029-2	00473	SCHNARZBECK	2023/6/21	2024/6/20
RF Swith	TR1029-1	02622	SCHNARZBECK	2023/6/21	2024/6/20
Cable	DA800-4000MM	NA	DA	2023/6/21	2024/6/20
Cable	DA800-11000MM	NA	DA	2023/6/21	2024/6/20

Conduction Test equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2023/6/21	2024/6/20
LISN	ENV 216	102796	Rohde & Schwarz	2023/6/21	2024/6/20
LISN	VN1-13S	004023	CRANAGE	2023/6/21	2024/6/20
Cable	RG223-1500MM	NA	RG	2023/6/21	2024/6/20

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4. EMC EMISSION TEST**4.1 CONDUCTED EMISSION MEASUREMENT**

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS

(Frequency Range 150KHz-30MHz)

FREQUNCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

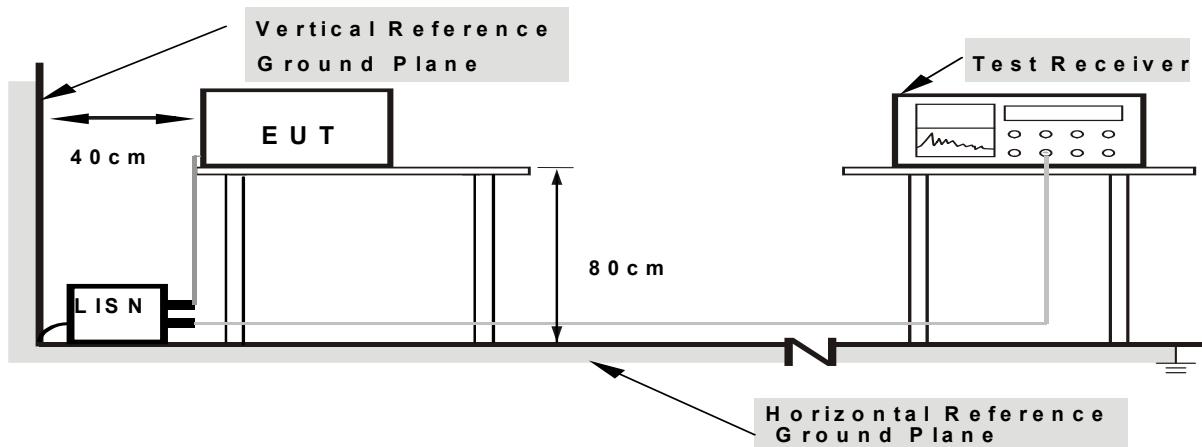


Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


4.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

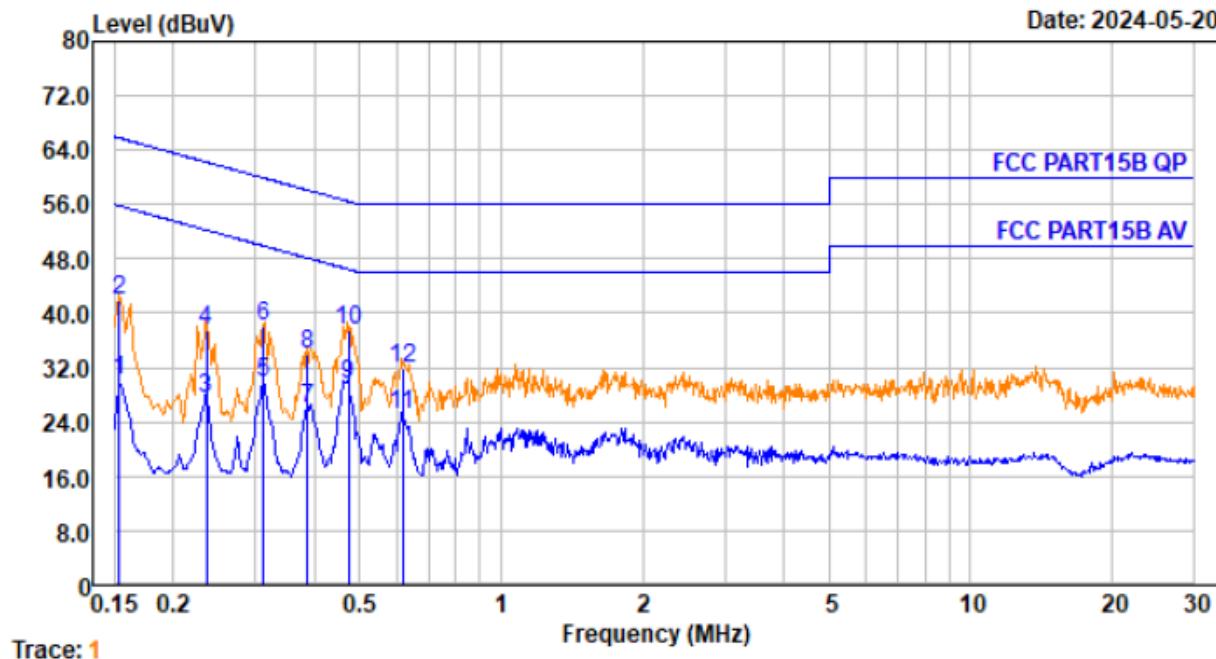

No.	Freq MHz	Cable Loss dB	LISN Factor dB/m	Aux Factor dB	Receiver Reading dBuV	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	0.154	0.08	9.54	10.16	10.26	30.04	55.78	-25.74	Average
2.	0.154	0.08	9.54	10.16	22.20	41.98	65.78	-23.80	QP
3.	0.235	0.10	9.55	10.14	7.62	27.41	52.26	-24.85	Average
4.	0.235	0.10	9.55	10.14	17.61	37.40	62.26	-24.86	QP
5.	0.312	0.11	9.56	10.13	9.98	29.78	49.93	-20.15	Average
6.	0.312	0.11	9.56	10.13	18.30	38.10	59.93	-21.83	QP
7.	0.387	0.09	9.56	10.13	6.11	25.89	48.12	-22.23	Average
8.	0.387	0.09	9.56	10.13	14.10	33.88	58.12	-24.24	QP
9.	0.474	0.07	9.57	10.12	9.82	29.58	46.45	-16.87	Average
10.	0.474	0.07	9.57	10.12	17.79	37.55	56.45	-18.90	QP
11.	0.617	0.07	9.58	10.11	5.28	25.04	46.00	-20.96	Average
12.	0.617	0.07	9.58	10.11	12.19	31.95	56.00	-24.05	QP

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

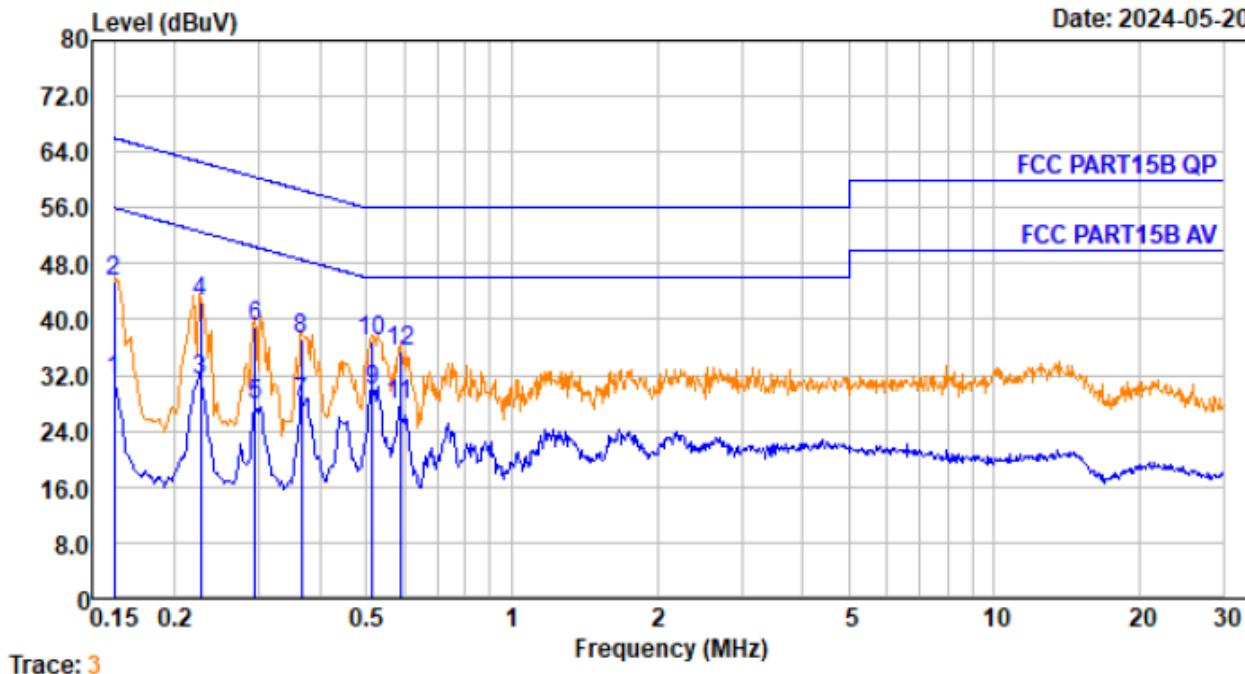

No.	Freq MHz	Cable Loss dB	LISN Factor dB/m	Aux Factor dB	Receiver Reading dBuV	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	0.150	0.08	9.53	10.16	11.64	31.41	56.00	-24.59	Average
2.	0.150	0.08	9.53	10.16	25.60	45.37	66.00	-20.63	QP
3.	0.227	0.10	9.55	10.14	11.62	31.41	52.57	-21.16	Average
4.	0.227	0.10	9.55	10.14	22.61	42.40	62.57	-20.17	QP
5.	0.294	0.11	9.56	10.14	7.80	27.61	50.41	-22.80	Average
6.	0.294	0.11	9.56	10.14	19.09	38.90	60.41	-21.51	QP
7.	0.367	0.09	9.57	10.13	8.34	28.13	48.56	-20.43	Average
8.	0.367	0.09	9.57	10.13	17.30	37.09	58.56	-21.47	QP
9.	0.516	0.06	9.58	10.11	10.17	29.92	46.00	-16.08	Average
10.	0.516	0.06	9.58	10.11	17.11	36.86	56.00	-19.14	QP
11.	0.589	0.07	9.58	10.11	8.04	27.80	46.00	-18.20	Average
12.	0.589	0.07	9.58	10.11	15.70	35.46	56.00	-20.54	QP

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.

2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

3.Mesurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	ETSI EN 300 422-1 V1.4.2(2011-08)				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

According to 15.236(g)


Table 3: Limits for spurious emissions

State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 μ W
Standby	2 nW	2 nW	20 nW

4.2.2 DEVIATION FROM TEST STANDARD

No deviation

4.2.3 TEST SETUP

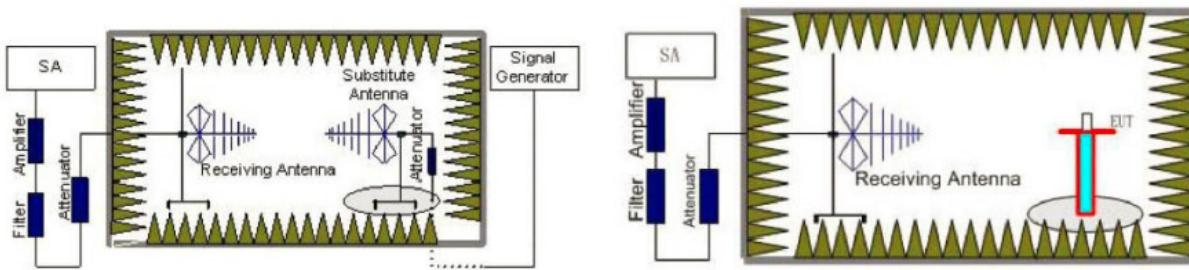

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 QP Detector function = peak, AV

4.2.4 TEST PROCEDURE

1. The EUT was placed on a turntable with 1.5m height
2. The test distance between the receiving antenna and the EUT is 3 meter, while the receiving (test)antenna is kept at 1.5 meter height.
3. Set EUT in continuous transmitting with maximum output power at test frequency.
4. The table was rotated from 0 to 360 degree to search the highest radiated emission.
5. Repeat step 3 to 4 for each polarization and test channel to find the worst emission level
6. The results obtained are compared to the limits in order to prove compliance with the requirement

4.2.5 TEST RESULTS

Radiated Spurious Emission (9Khz-30MHz)


Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:


1. The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})$ (dB);
3. Limit line=Specific limits(dBuV) + distance extrapolation factor.

Radiated Spurious Emission (Between 30MHz – 1GHz)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode (Low Channel)		

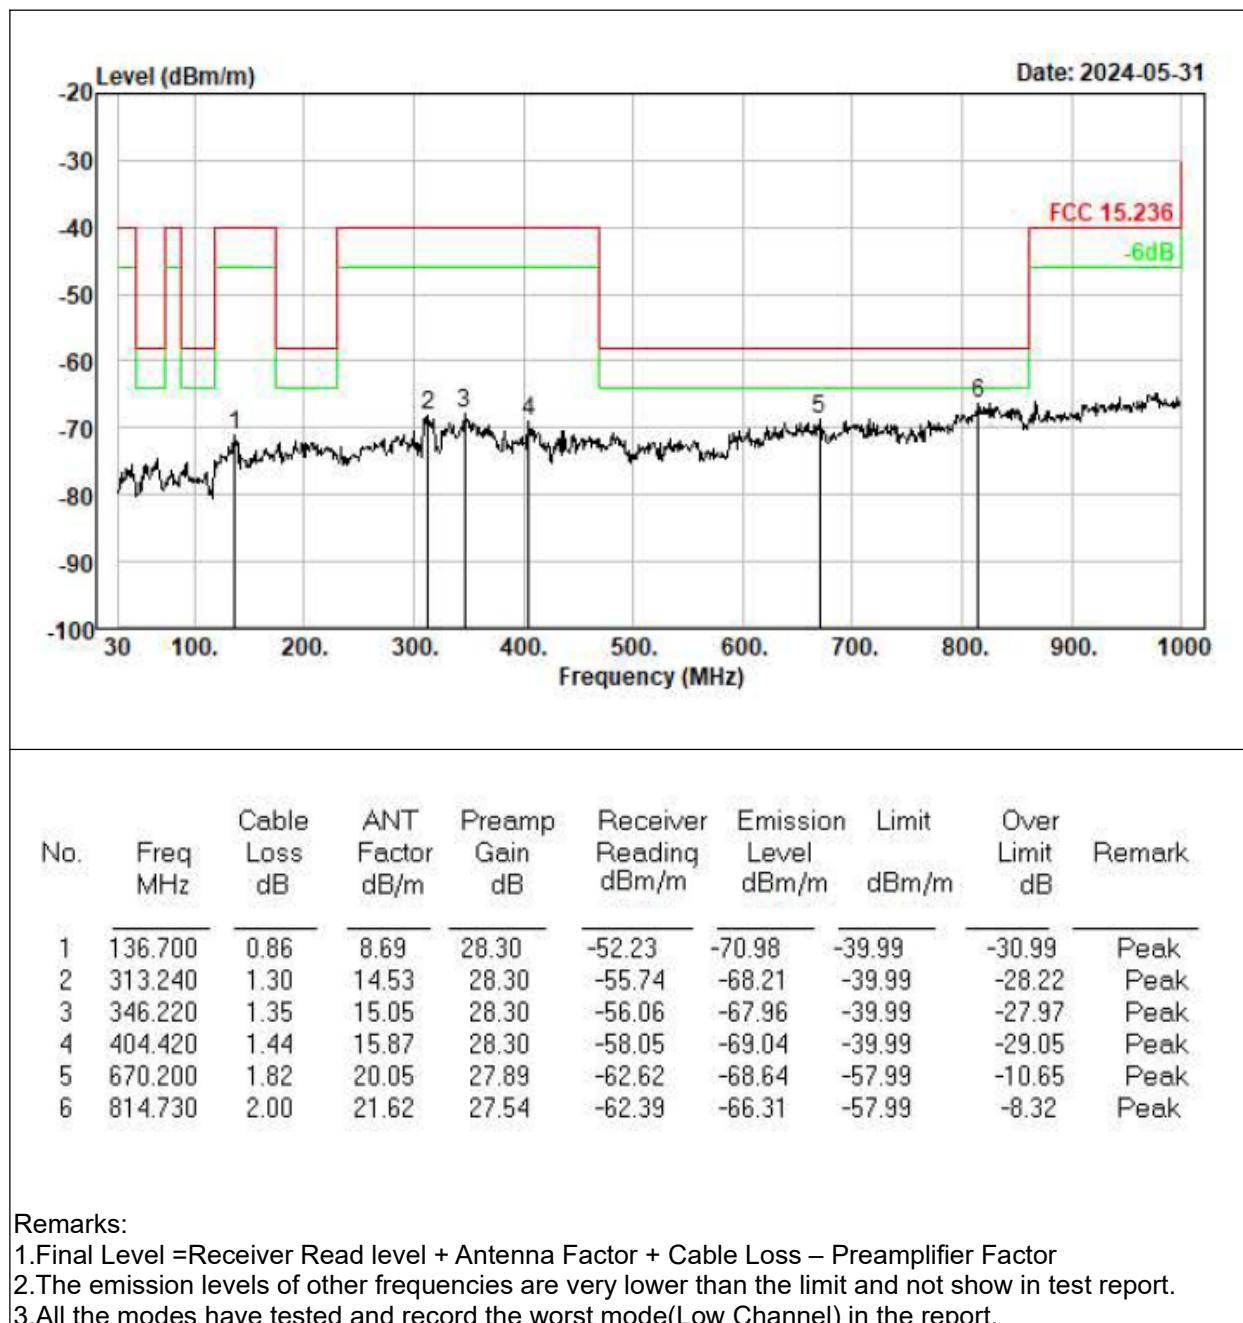

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Vertical
Test Voltage :	DC 3V		
Test Mode :	TX Mode (Low Channel)		

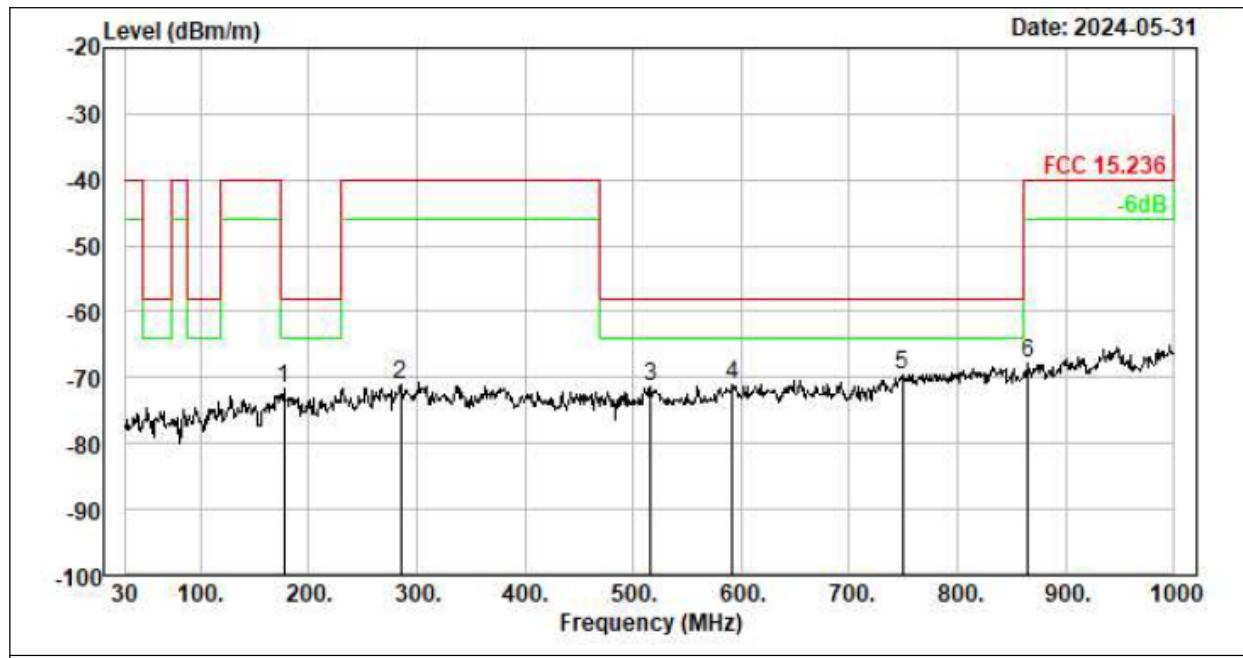


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Preamp Gain dB	Receiver Reading dBm/m	Emission Level dBm/m	Limit dBm/m	Over Limit dB	Remark
1	177.440	1.00	9.67	28.30	-54.07	-71.70	-57.99	-13.71	Peak
2	285.110	1.25	13.94	28.30	-58.09	-71.20	-39.99	-31.21	Peak
3	515.970	1.58	17.49	28.26	-62.18	-71.37	-57.99	-13.38	Peak
4	591.630	1.71	18.77	28.08	-63.57	-71.17	-57.99	-13.18	Peak
5	748.770	1.92	20.95	27.70	-64.84	-69.67	-57.99	-11.68	Peak
6	865.170	2.06	22.33	27.42	-64.67	-67.70	-39.99	-27.71	Peak

Remarks:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- All the modes have tested and record the worst mode(Low Channel) in the report.


Radiated Spurious Emission (Above 1GHz)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode (Low Channel)		

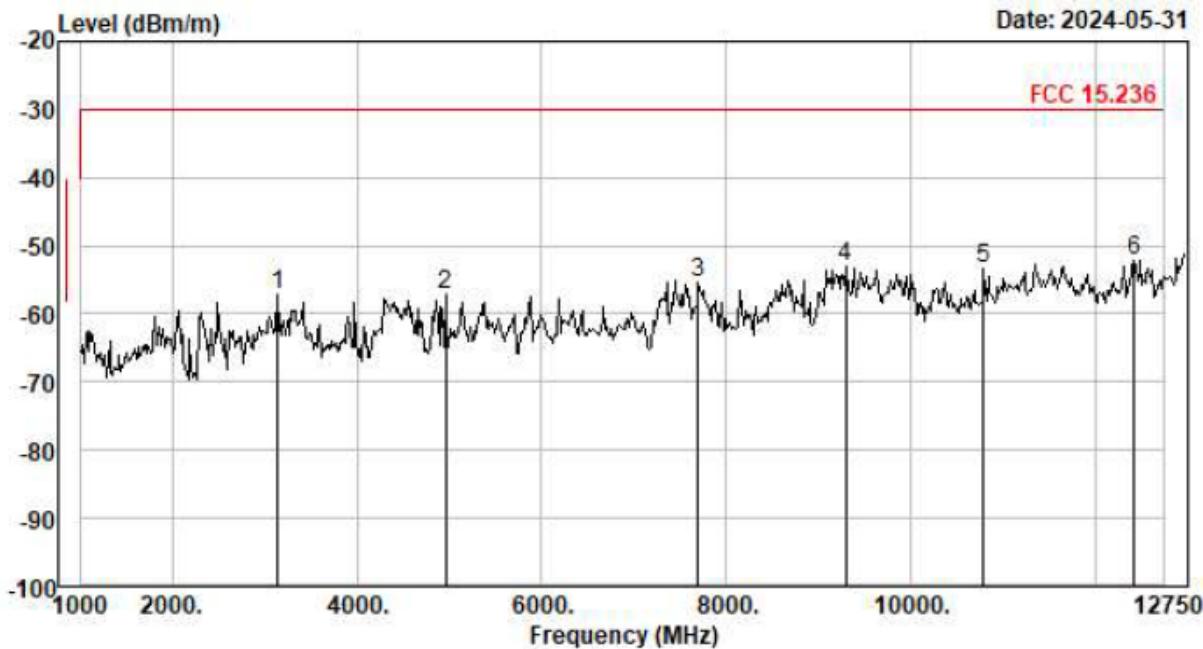

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Preamp Gain dB	Receiver Reading dBm/m	Emission Level dBm/m	Limit dBm/m	Over Limit dB	Remark
1	3142.000	3.99	29.53	34.77	-56.02	-57.27	-29.99	-27.28	Peak
2	4961.000	5.15	32.80	34.02	-61.24	-57.31	-29.99	-27.32	Peak
3	7698.000	6.53	36.42	32.89	-65.37	-55.31	-29.99	-25.32	Peak
4	9296.000	7.48	38.11	33.09	-65.53	-53.03	-29.99	-23.04	Peak
5	10792.000	7.81	38.92	32.54	-67.47	-53.28	-29.99	-23.29	Peak
6	12424.000	8.83	39.08	31.80	-68.18	-52.07	-29.99	-22.08	Peak

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Vertical
Test Voltage :	DC 3.7V		
Test Mode :	TX Mode (Low Channel)		

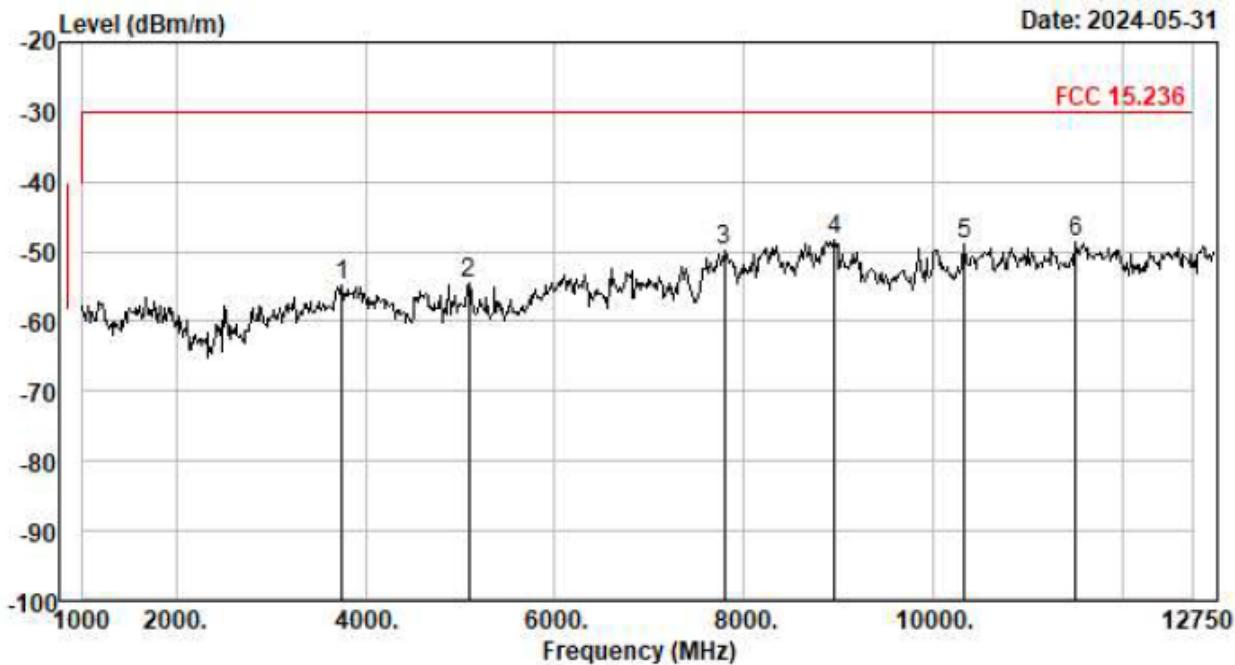

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Preamp Gain dB	Receiver Reading dBm/m	Emission Level dBm/m	Limit dBm/m	Over Limit dB	Remark
1	3754.000	4.24	30.41	34.65	-54.80	-54.80	-29.99	-24.81	Peak
2	5097.000	5.25	33.16	33.92	-59.10	-54.61	-29.99	-24.62	Peak
3	7800.000	6.58	36.48	32.96	-60.01	-49.91	-29.99	-19.92	Peak
4	8956.000	7.38	37.56	33.20	-60.04	-48.30	-29.99	-18.31	Peak
5	10333.000	7.71	38.57	32.71	-62.62	-49.05	-29.99	-19.06	Peak
6	11506.000	8.41	38.90	32.28	-63.76	-48.73	-29.99	-18.74	Peak

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.All the modes have tested and record the worst mode(Low Channel) in the report.

5. MAXIMUM RADIATED POWER(EIRP)**5.1 APPLIED PROCEDURES / LIMIT**


ACCORDING TO FCC 15.236(D)(1), FOR LOW POWER AUXILIARY STATION OPERATING IN THE 470-608, AND 614-698 MHZBANDS, IN THE BANDS ALLOCATED AND ASSIGNED FOR BROADCAST TELEVISION AND IN THE 600 MHZ SERVICE BAND: 50 MW EIRP

5.2 TEST PROCEDURE

1. THE MAXIMUM PEAK OUTPUT POWER WAS MEASURED WITH A SPECTRUM ANALYZER CONNECTED TO THE ANTENNA TERMINAL WHILE EUT WAS OPERATING IN UNMODULATED SITUATION.
2. POWER WAS SUPPLIED TO THE BATTERY INPUT CONNECTOR A POWER SUPPLY. THE POWER SUPPLY WAS SET FOR +3.0VDC. THE SPECTRUM ANALYZER WAS CONNECTED AT ANTENNA TERMINAL TO MEASURE RF POWER OF THE CARRIER.
3. A MULTIMETER WAS CONNECTED IN SERIES WITH FINAL RF STAGE TO MEASURE THE CURRENT; A MULTIMETER WAS USED TO MEASURE FINAL RF STAGE SUPPLY VOLTAGE. THEN THE VOLTAGE V.S. CURRENT OF THE FINAL RF STAGE CAN BE SHOWED.

5.3 DEVIATION FROM STANDARD

No deviation.

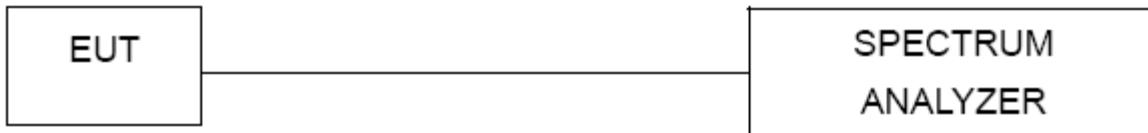5.4 TEST SETUP**5.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V

Frequency	CONDUCTED OUTPUT POWER (dBm)	ANT GAIN (dBi)	EIRP (dBm)	Limit (dBm)	Result
560.5MHz	-1.194	1.3	0.106	17	PASS
575.5MHz	-3.948	1.3	-2.648	17	PASS
589.5MHz	-4.061	1.3	-2.761	17	PASS

Remark: cable loss is 1dBm, It has been compensated in the test diagram.

Low Channel



Mid Channel



High Channel



6. CHANNEL BANDWIDTH

6.1 APPLIED PROCEDURES / LIMIT

According to FCC 15.236(f)(2), The operating frequency within a permissible band of operation as defined in paragraph (c) must comply with the following requirements.

- (1) The frequency selection shall be offset from the upper or lower band limits by 25 kHz or an integral multiple thereof.
- (2) One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200kHz.
- (3) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in Section 8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08) (incorporated by reference, see §15.38). Emissions outside this band shall comply with the limit specified at the edges of the ETSI mask

6.2 TEST PROCEDURE

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1kHz, VBW = 3kHz
3. Mark the -20dB BANDWIDTH

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP




6.5 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 3.7V


Frequency (MHz)	-20 bandwidth (KHz)	Limit (KHz)	Result
560.5MHz	60.11	200	Pass
575.5MHz	60.08	200	Pass
589.5MHz	60.01	200	Pass

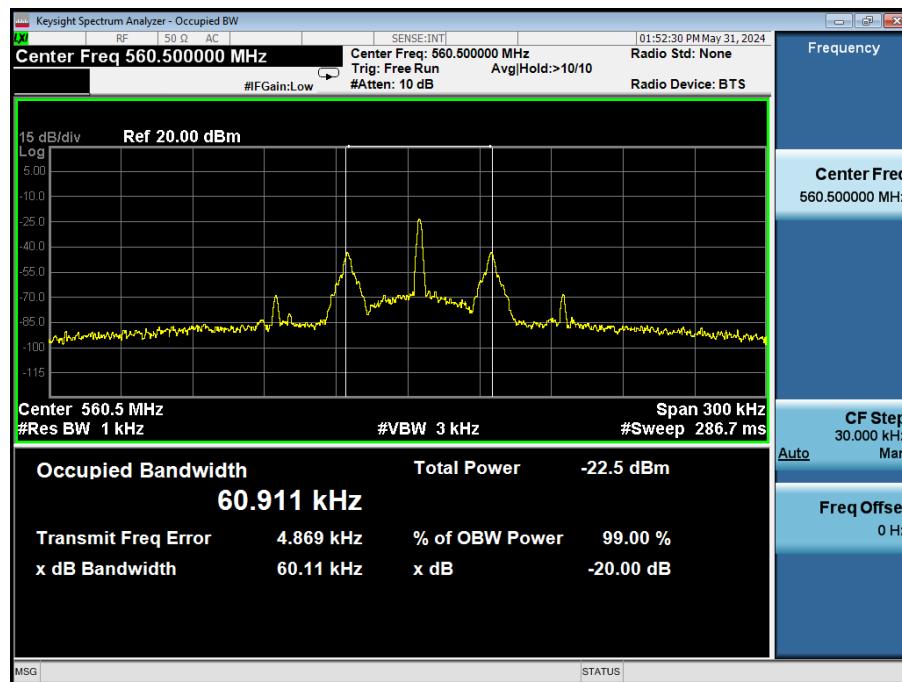

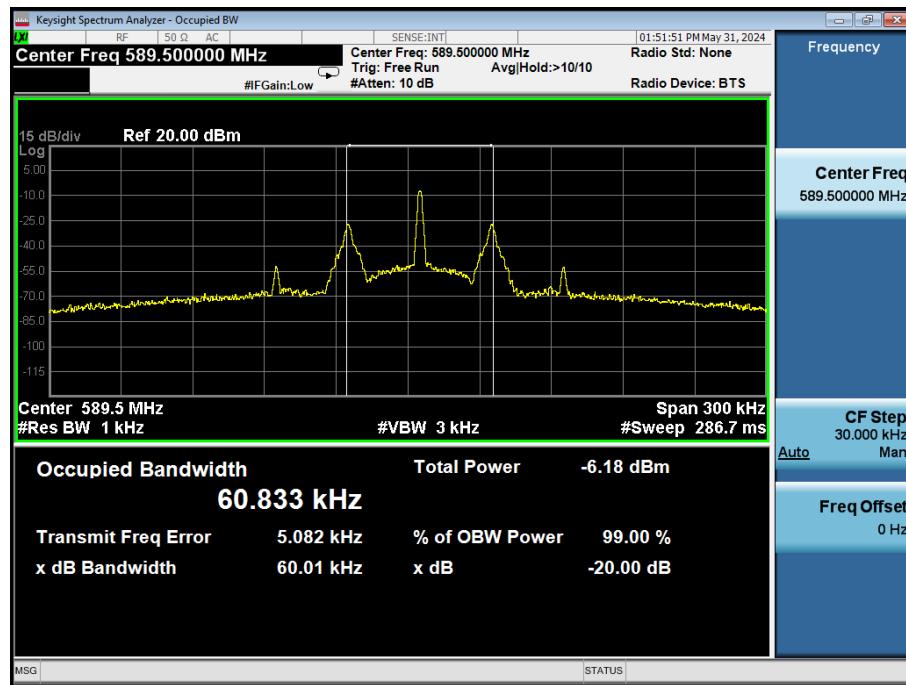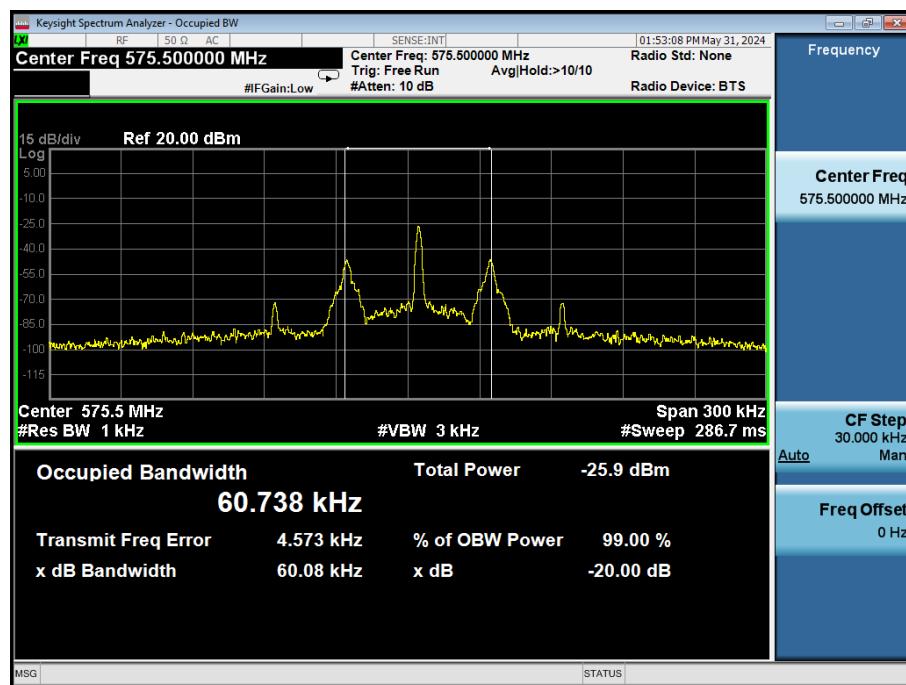


7. NECESSARY BANDWIDTH

7.1 LIMIT

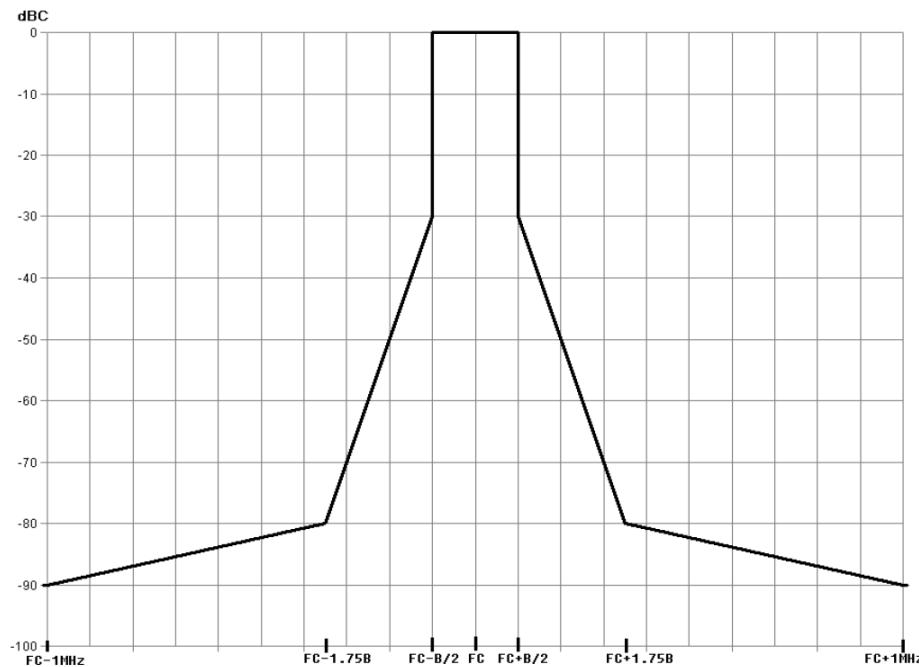

Spectrum mask for digital systems below 1 GHz

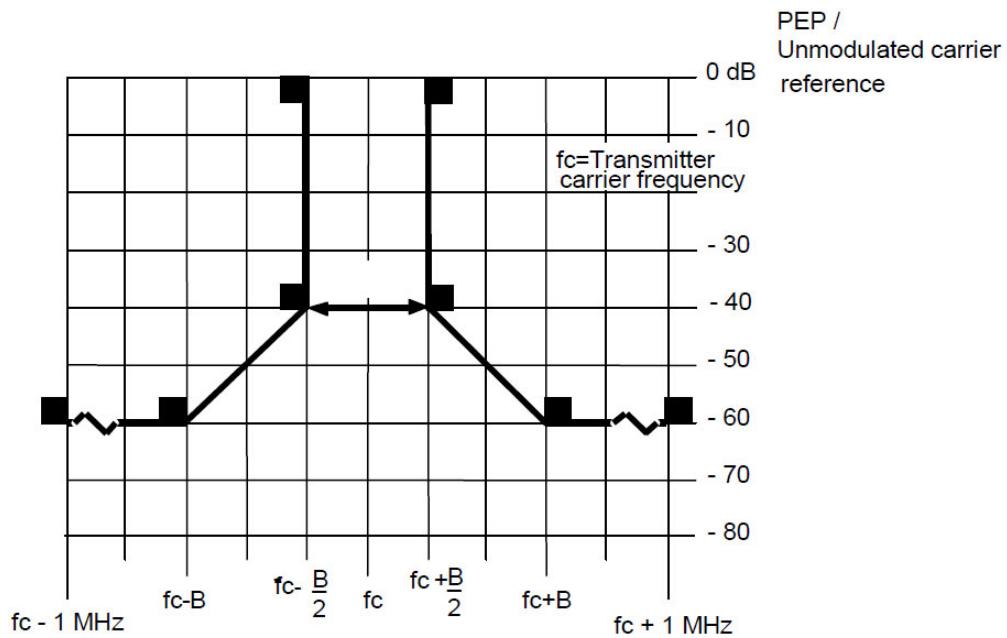

Spectral mask for digital systems above 1 GHz, normalized to channel bandwidth B

Standard Applicable

According to §15.236 (g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2

(2011-08), Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3GHz frequency range; Part 1: Technical characteristics and methods of measurement. Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

According to ETSI EN 300 422-2 V2.1.1 section 8.3, the transmitter output spectrum shall be within the mask defined in the following figure.

7.2 TEST SETUP**7.3 TEST PROCEDURE**

The transmitter shall be modulated with the test signals defined in clause 7.1.2. In any case the mask shall not be exceeded.

- Step 1: Measure the "Carrier Power" with the spectrum analyzer setup:

- Center Frequency = f_c
- Span = Zero span
- Detector = RMS
- Trace Mode = Average
- RBW&VBW = $5 \times B$
- Sweep time ≥ 2 s

- Step 2: Measure the "Maximum Relative Level (dBc) at Specified Carrier Offsets" with the following spectrum analyzer setup:

- Center Frequency = f_c
- Span $\geq 5 \times B$
- Detector = RMS
- Trace Mode = Peak Hold
- RBW&VBW = 1 kHz
- Sweep time ≥ 2 s

Limits: Mask shall not be exceeded.

- Step 3: Measure the "transmitter wide band noise floor":

The measurement of transmitter broad band noise floor shall be carried out according to clause 8.3.1.1.

- Start Frequency = $fc + 1,75B$ and $fc - 1$ MHz below 1 GHz,

Start Frequency = $fc + B$ and $fc - 1$ MHz above 1 GHz.

- Stop Frequency = $fc + 1$ MHz and $fc - 1,75 B$ below 1 GHz,

Stop Frequency = $fc + 1$ MHz and $fc - B$ above 1 GHz.

- Detector = RMS

- Trace Mode = Average

- RBW&VBW = 1 kHz


- Sweep time ≥ 2 s

NOTE 2: Two spectrum ranges are to be measured!


Limits: Mask shall not be exceeded.

7.4 TEST RESULTS



Low Channel

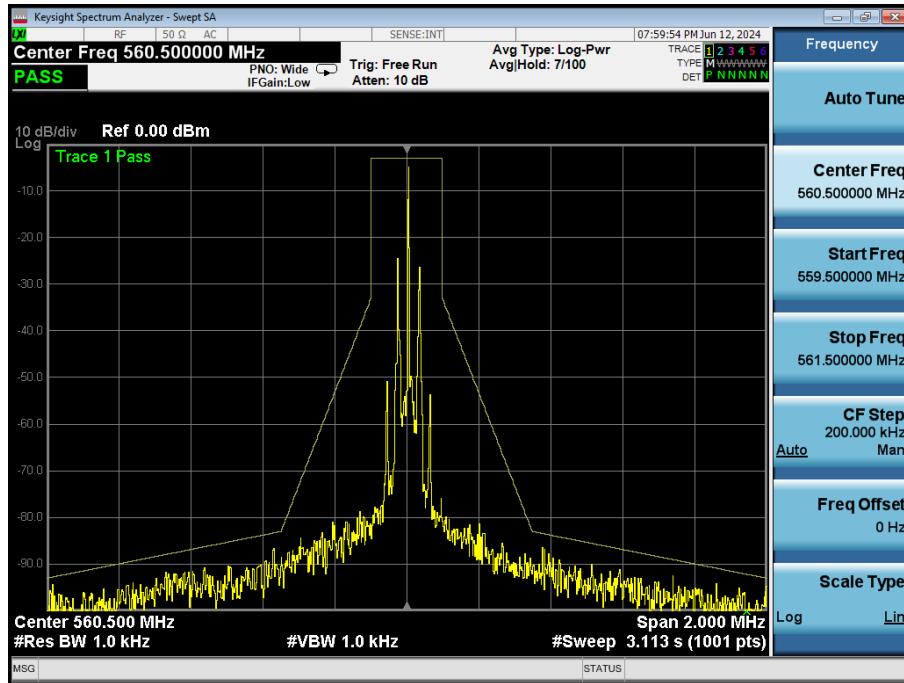

Mid Channel

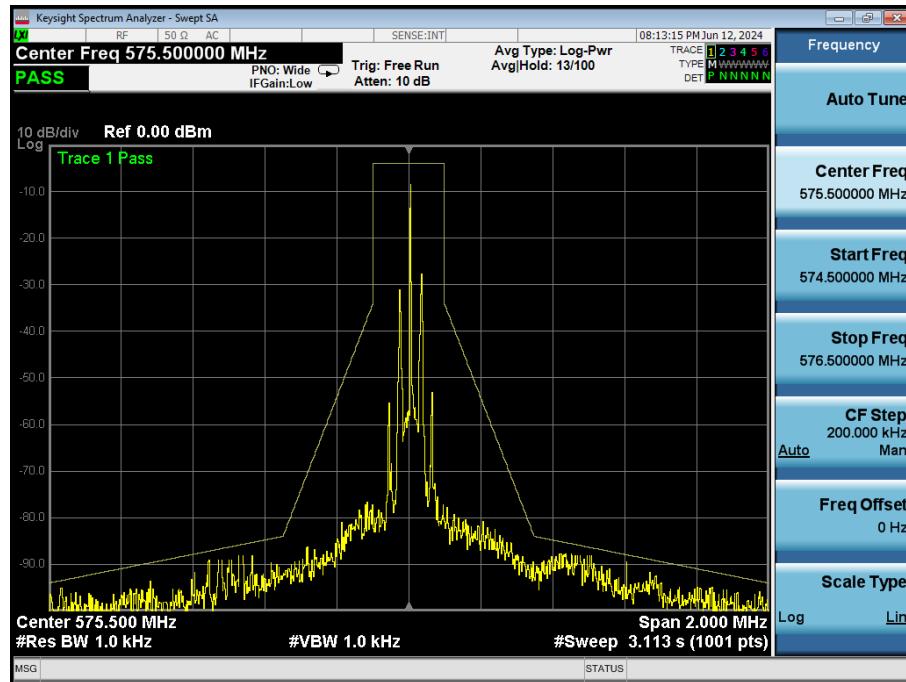

High Channel

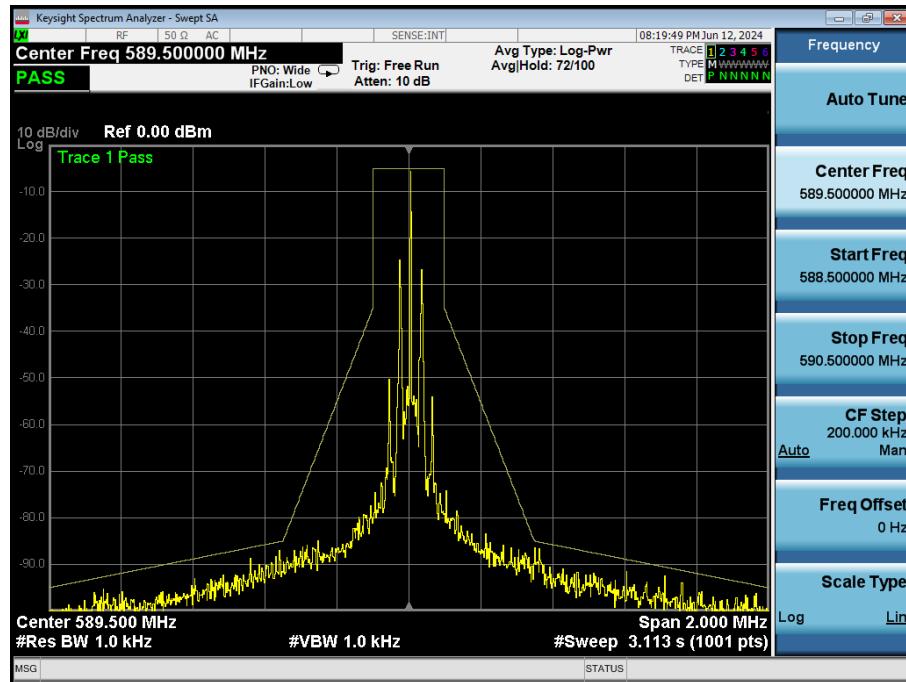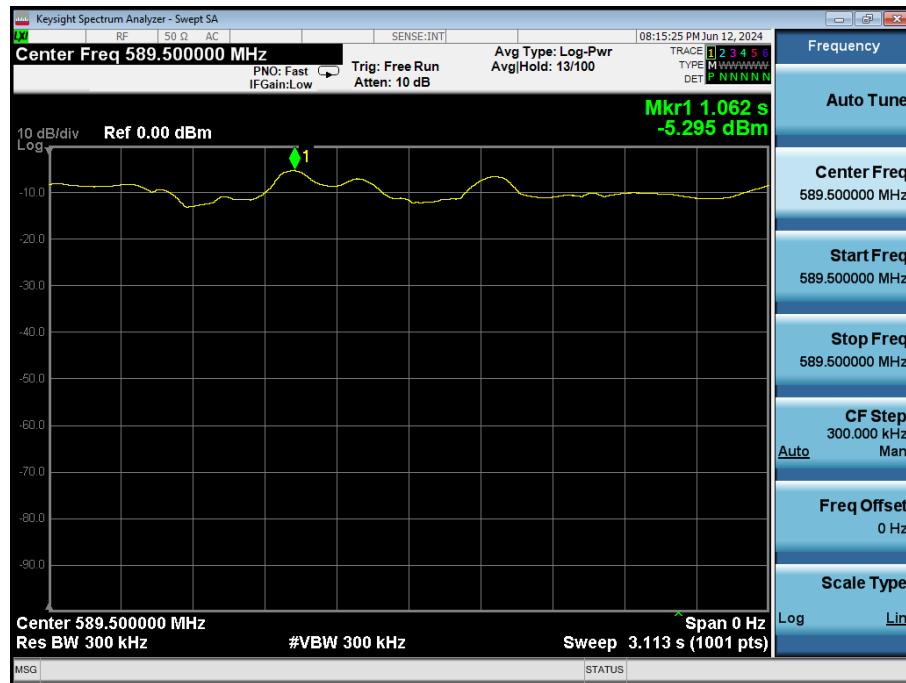

8. FREQUENCY STABILITY

8.1 Limit

$\pm 0.005\% \times 560.50\text{MHz} = 28.03\text{ KHz}$

$\pm 0.005\% \times 575.5\text{MHz} = 28.78\text{ KHz}$

$\pm 0.005\% \times 589.5\text{MHz} = 29.48\text{ KHz}$

8.2 Standard Applicable

According to FCC 15.236(f)(3), The frequency tolerance of the carrier signal shall be maintained within $\pm 0.005\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery

8.3 TEST SETUP



8.4 Test Procedure

1. Setup the configuration of the ambient temperature from -20°C to 50°C with sufficient time. And measure the different power of the EUT with an artificial power from highest to end point voltage.
2. Set frequency counter center frequency to the right frequency needs to be measured band.

8.5 Test Result

Test frequency (MHz)	Test Conditions		Measure Frequency (MHz)	Frequency Error (KHz)	Limit (KHz)	Result
	Voltage (V)	Temperature($^{\circ}\text{C}$)				
560.5	N	N	560.515	15	± 28.03	Pass
		L	560.514	14		Pass
		H	560.515	15		Pass
	L	N	560.516	16		Pass
		L	560.515	15		Pass
		H	560.515	15		Pass
	H	N	560.516	16		Pass
		L	560.516	16		Pass
		H	560.515	15		Pass

Test frequency	Test Conditions		Measure Frequency	Frequency Error	Limit	Result
(MHz)	Voltage (V)	Temperature(°C)	(MHz)	(KHz)	(KHz)	
575.5	N	N	575.515	15	±28.78	Pass
		L	575.514	14		Pass
		H	575.515	15		Pass
	L	N	575.516	16		Pass
		L	575.515	15		Pass
		H	575.515	15		Pass
	H	N	575.516	16		Pass
		L	575.516	16		Pass
		H	575.515	15		Pass

Test frequency	Test Conditions		Measure Frequency	Frequency Error	Limit	Result
(MHz)	Voltage (V)	Temperature(°C)	(MHz)	(KHz)	(KHz)	
589.5	N	N	589.515	15	±29.48	Pass
		L	589.514	14		Pass
		H	589.515	15		Pass
	L	N	589.516	16		Pass
		L	589.515	15		Pass
		H	589.515	15		Pass
	H	N	589.516	16		Pass
		L	589.516	16		Pass
		H	589.515	15		Pass

9. TEST PHOTO & EUT PHOTO

Reference to the appendix for details.

***** END OF REPORT *****