




802.11a

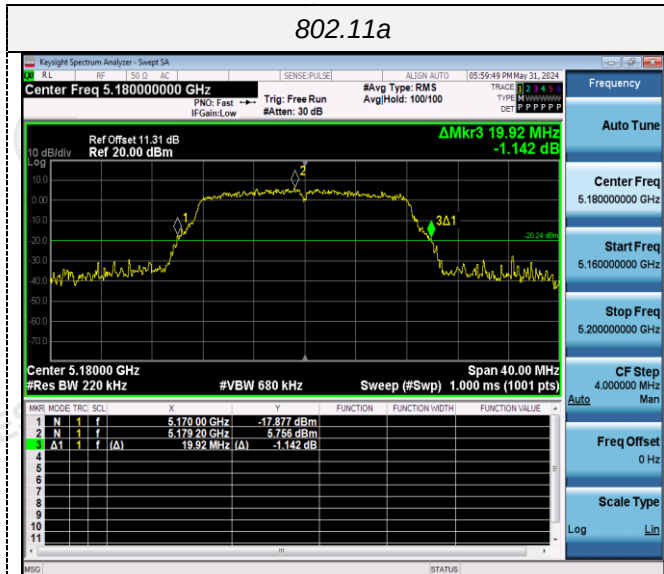


802.11n(HT20)

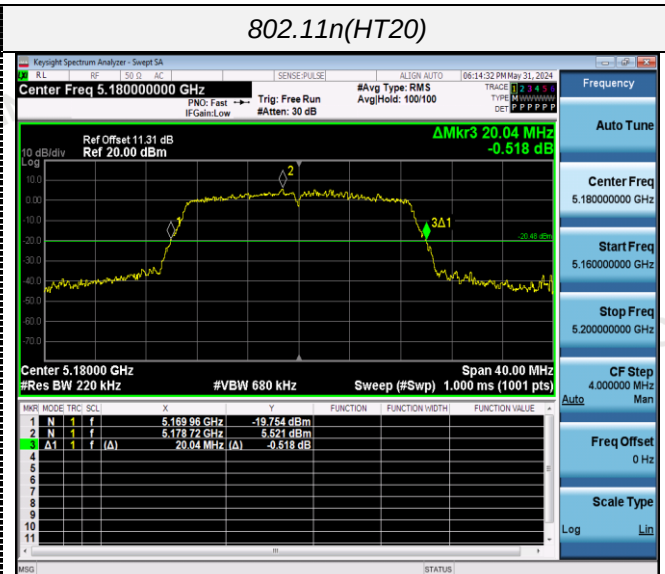


CH36

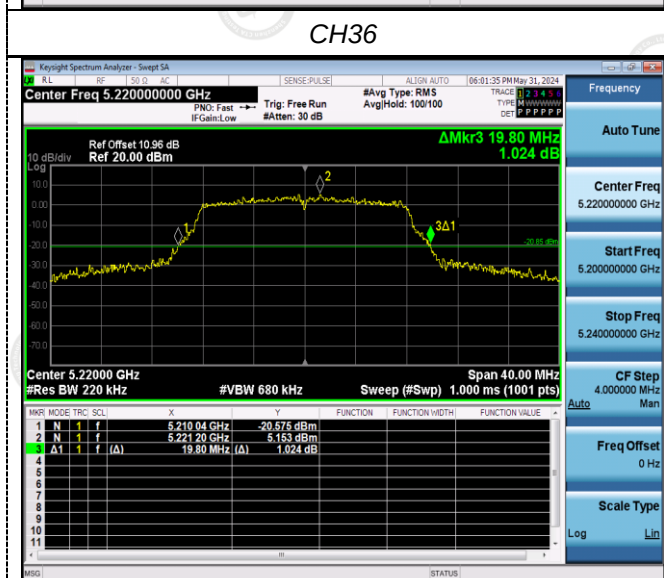


CH36

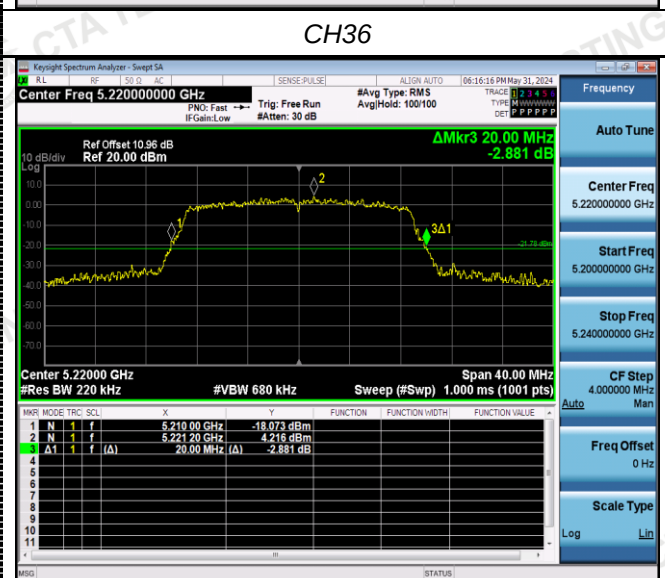

CH40

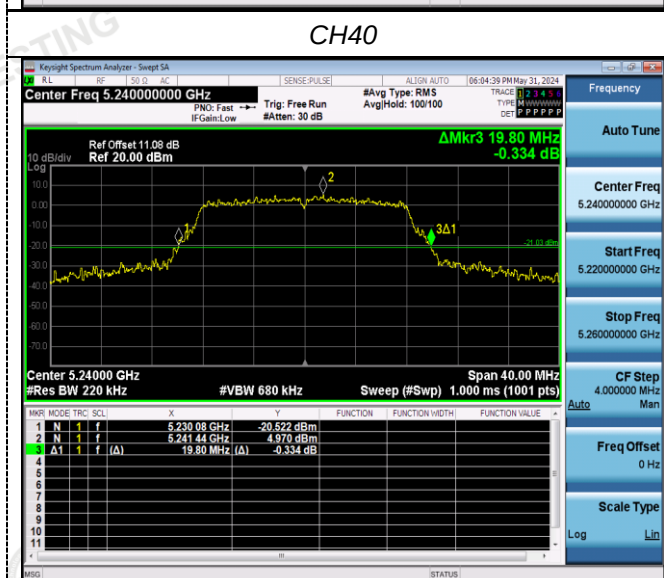


CH40

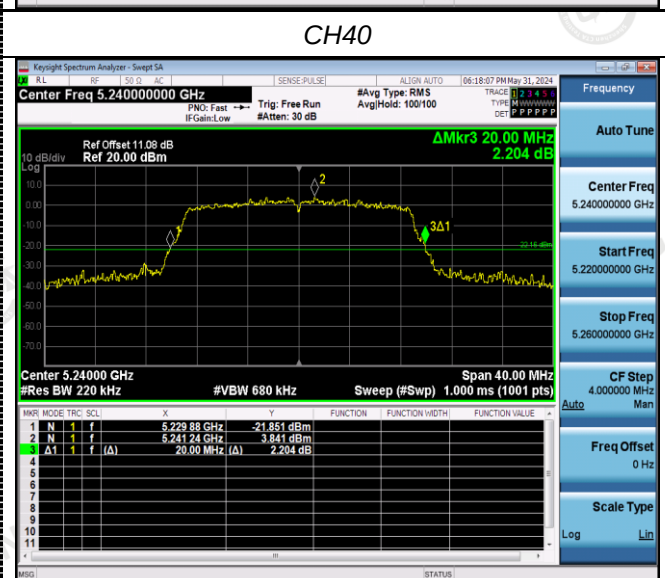


CH48




CH48




802.11n(HT40)

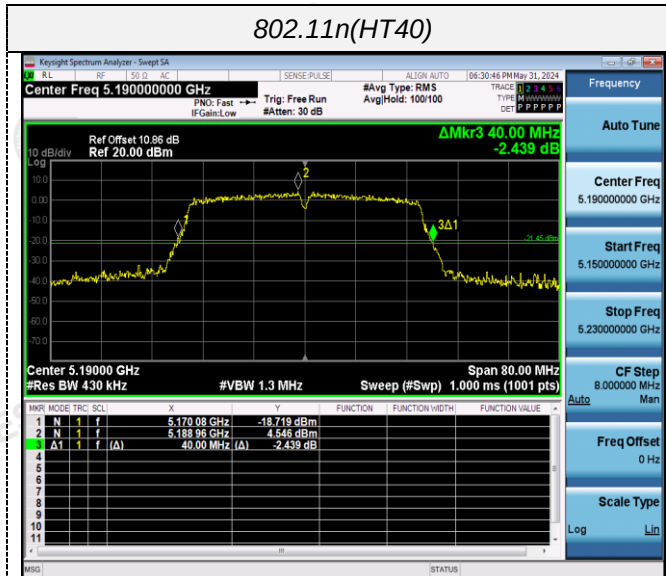


802.11ac(HT20)

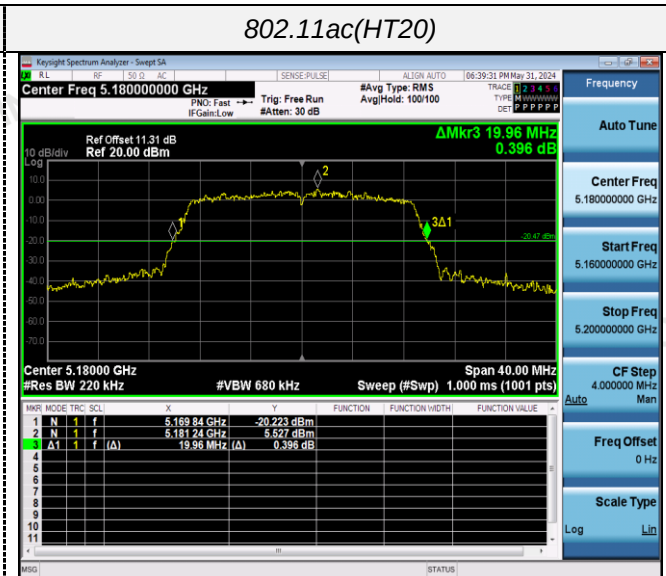


CH38

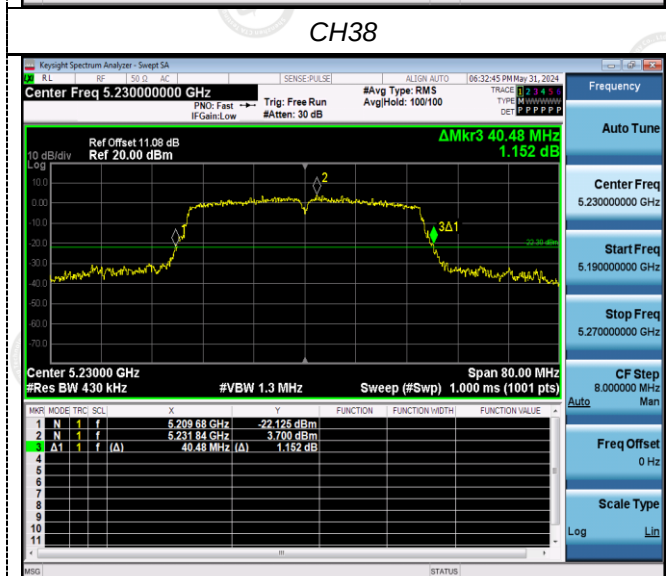


CH36

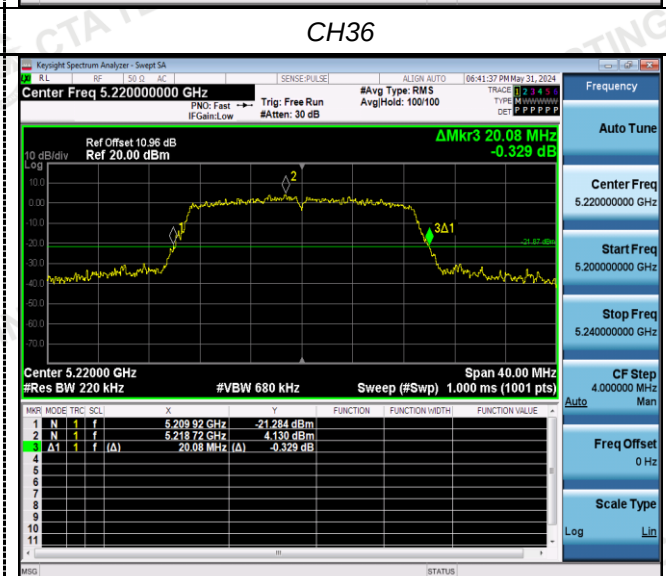

CH46

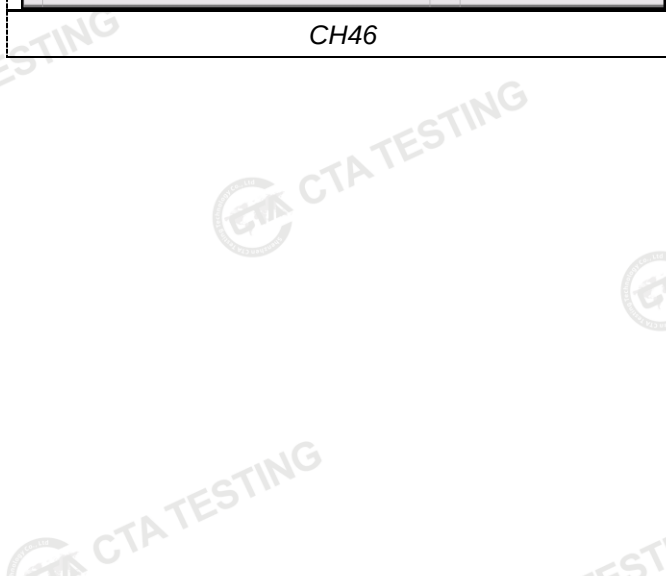


CH40

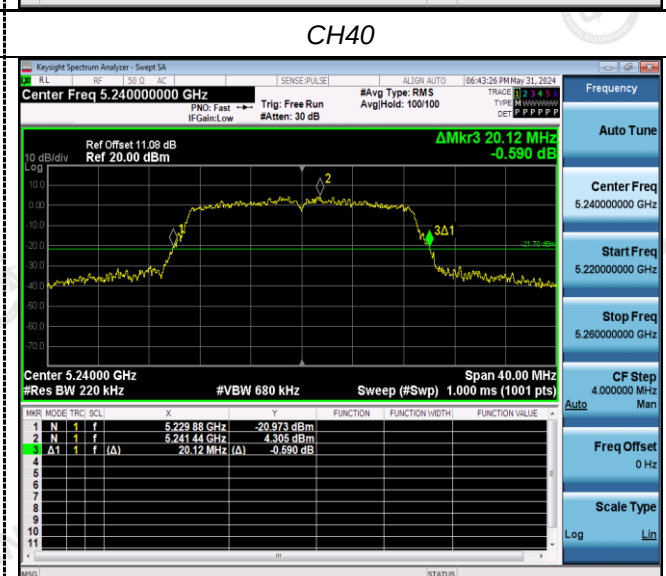


CH48




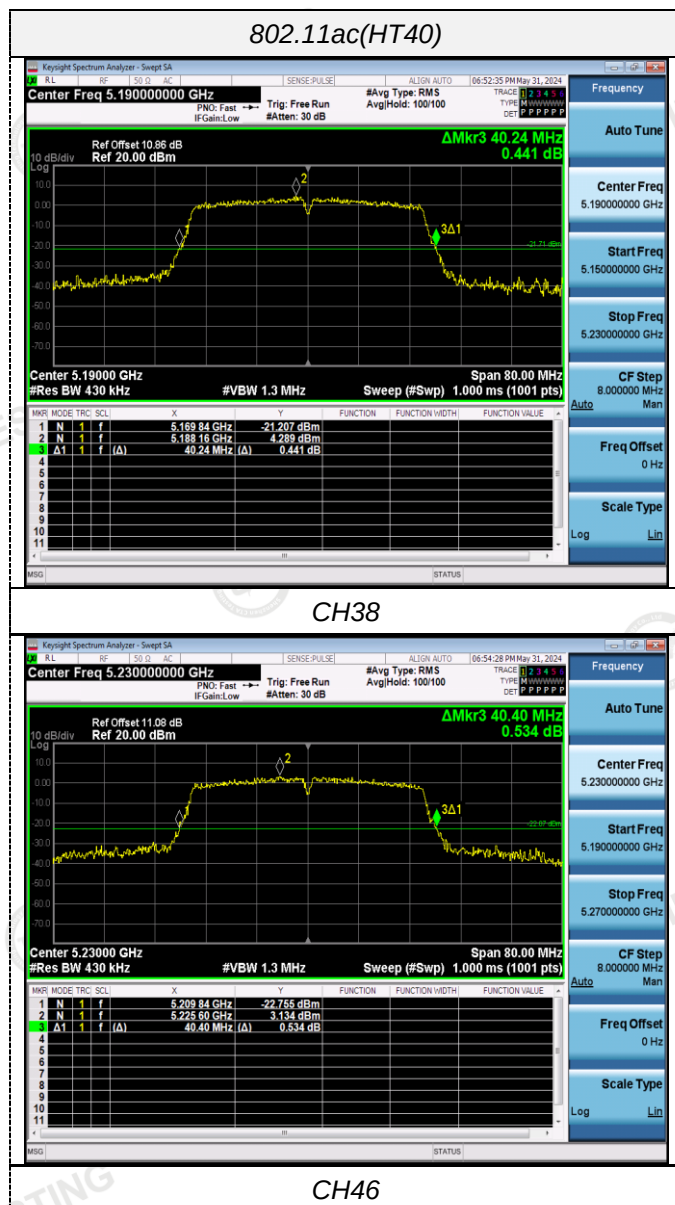

802.11ax(HT20)

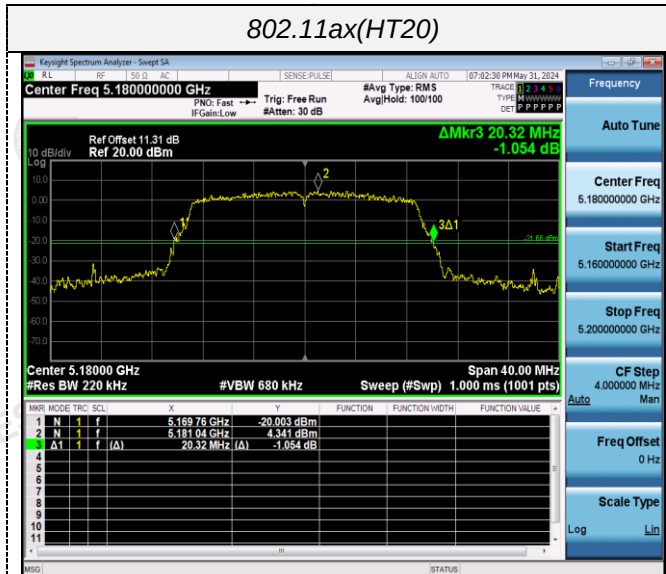


802.11ax(HT40)

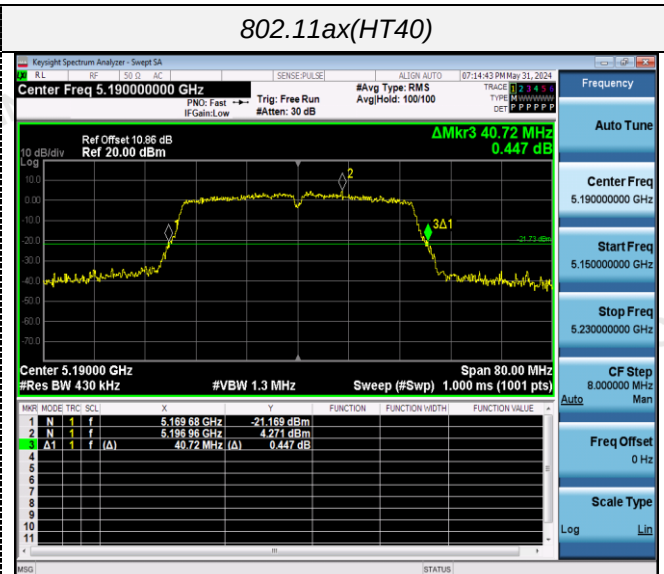


CH36



CH38

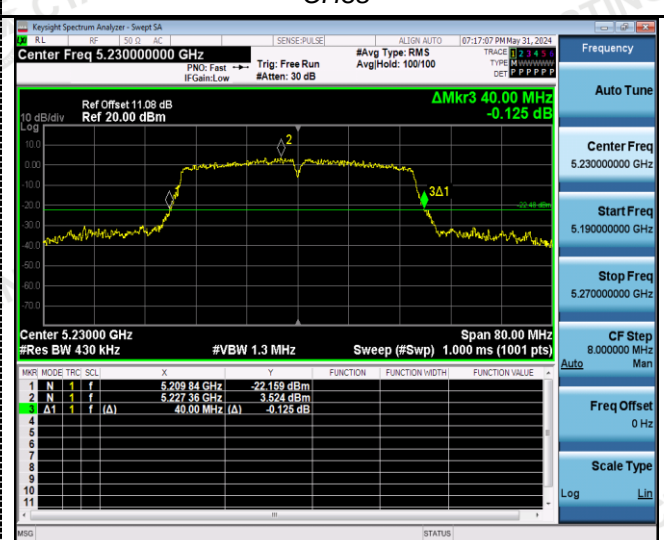

CH44

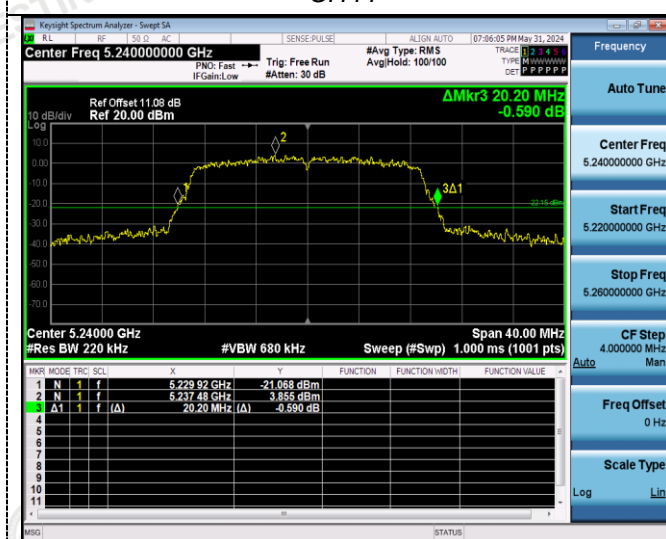

CH46



CH48

4.6 Minimum Emission Bandwidth (6dB Bandwidth)

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results


Type	Bands	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	U-NII 3	149	13.800	≥500KHz	Pass
		157	15.000		
		165	14.200		
802.11n(HT20)	U-NII 3	149	15.080		
		157	13.800		
		165	15.000		
802.11n(HT40)	U-NII 3	151	33.920		
		159	35.120		
802.11ac(HT20)	U-NII 3	149	15.040		
		157	15.120		
		165	15.560		
802.11ac(HT40)	U-NII 3	151	35.040		
		159	34.960		
802.11ax(HT20)	U-NII 3	149	15.320		
		157	14.680		
		165	14.200		
802.11ax(HT40)	U-NII 3	151	35.040		
		159	35.040		

Test plot as follows:

802.11a




802.11n(HT20)

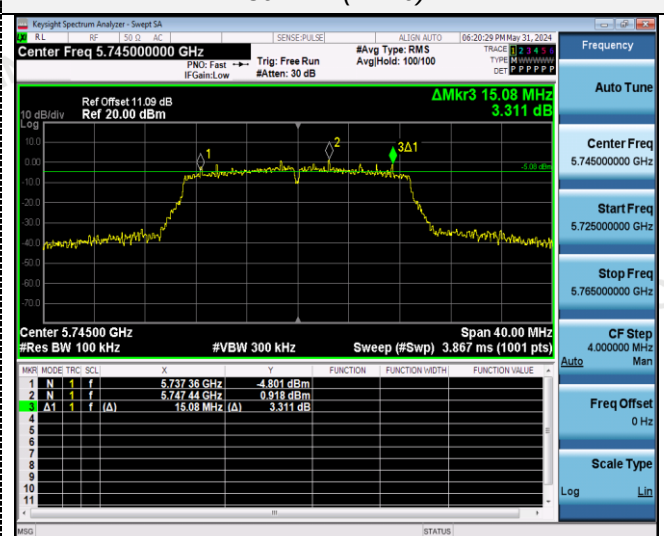

CH149




CH149

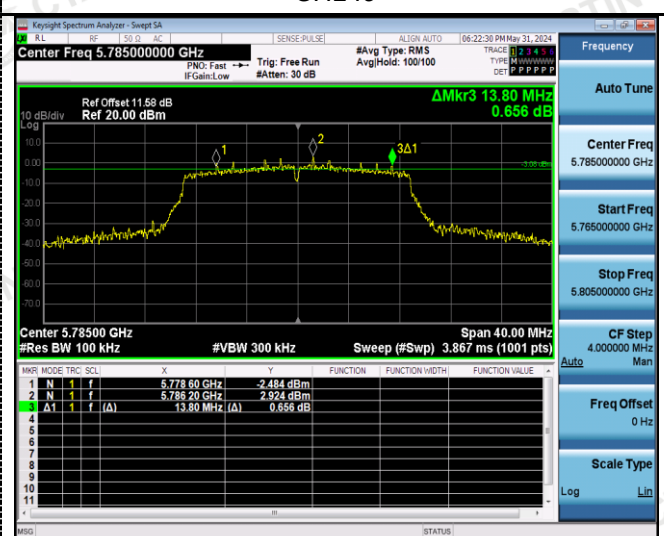


CH157




CH157

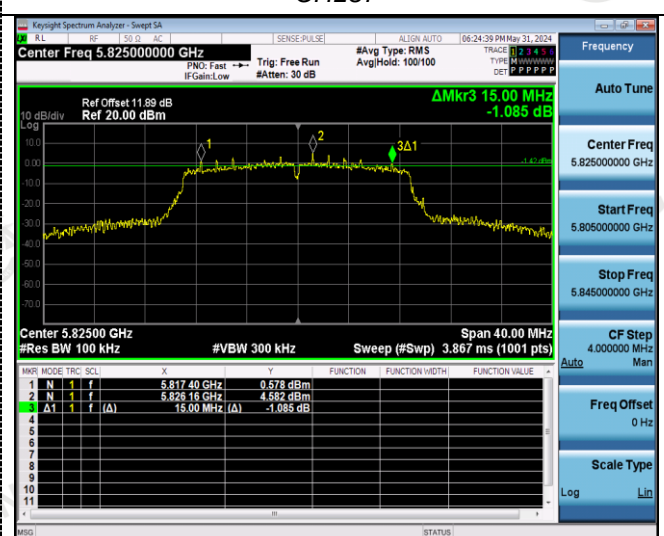


CH165




CH165




802.11n(HT40)

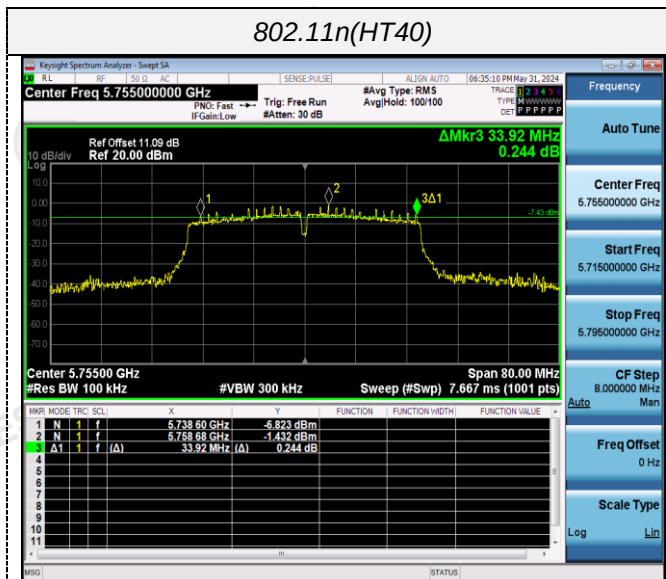

802.11ac(HT20)

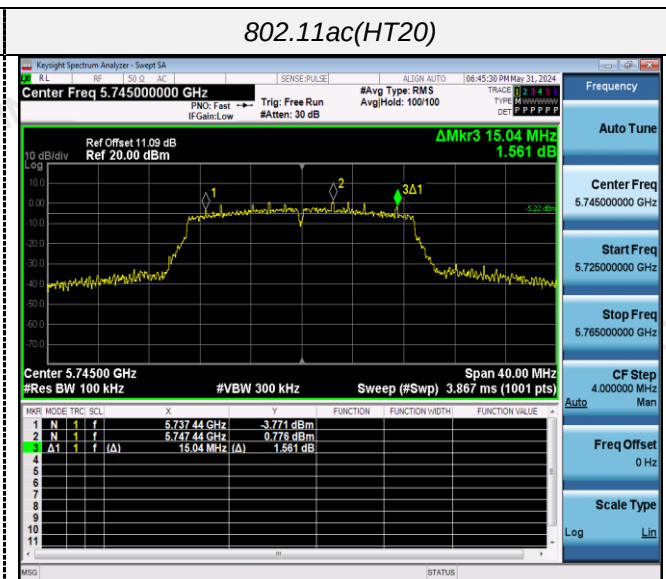


CH151

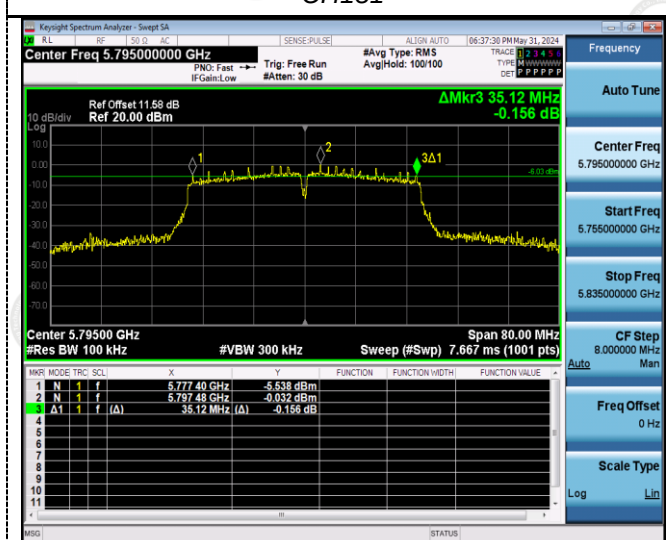

CH149



CH159

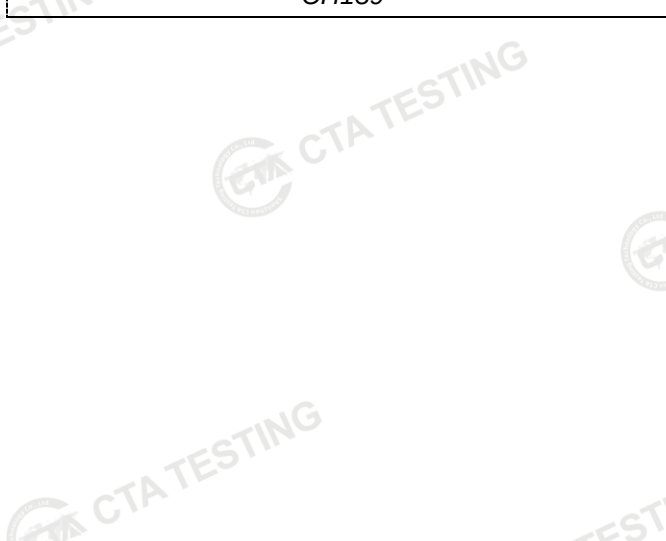


CH157




CH165


802.11ac(HT40)

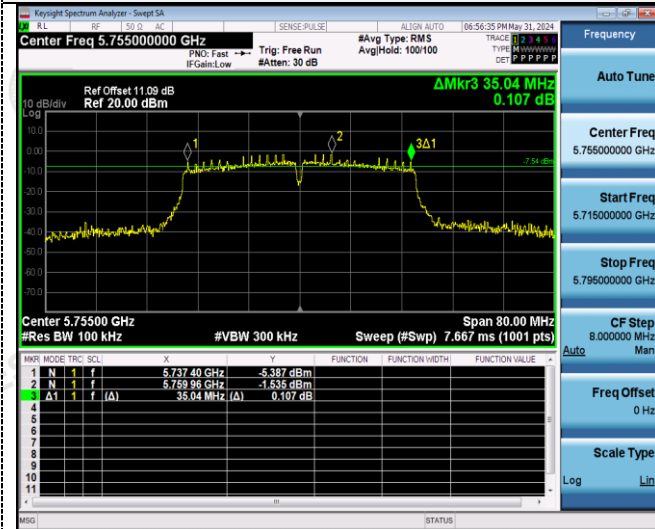


802.11ax(HT20)

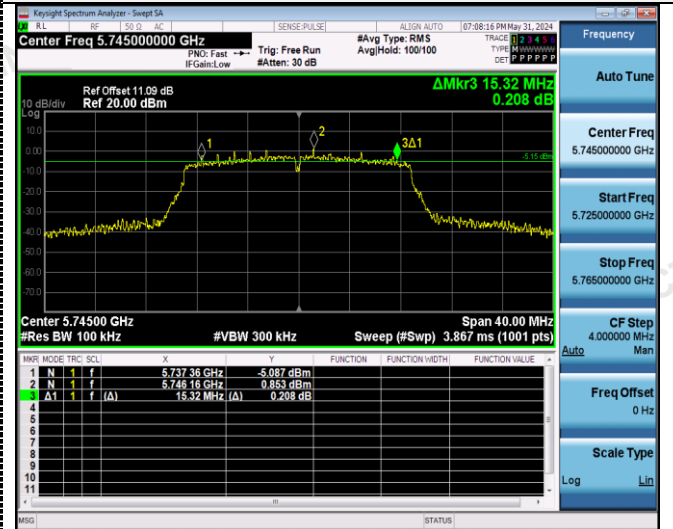

CH151

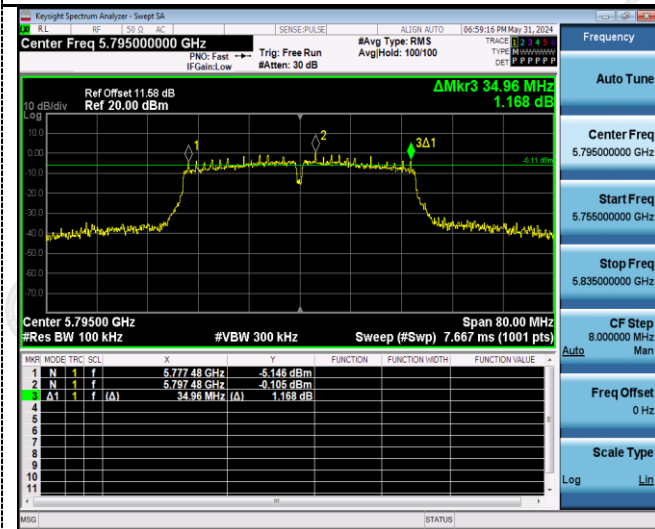

CH149

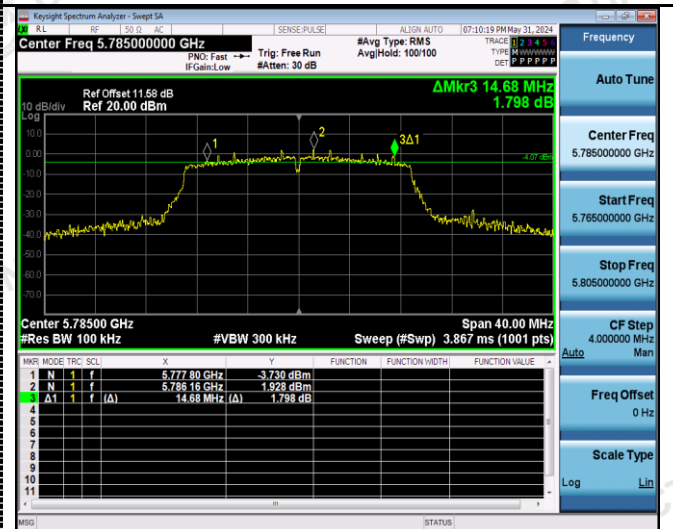


CH159



CH157



CH156

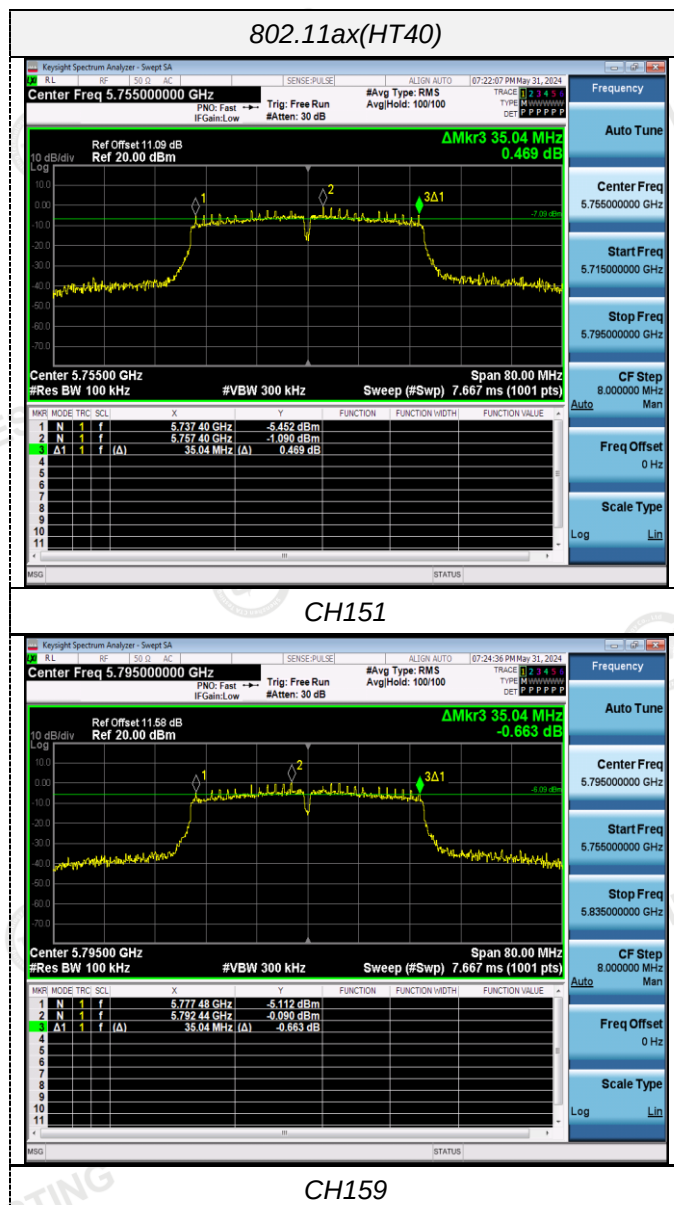


4.7 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

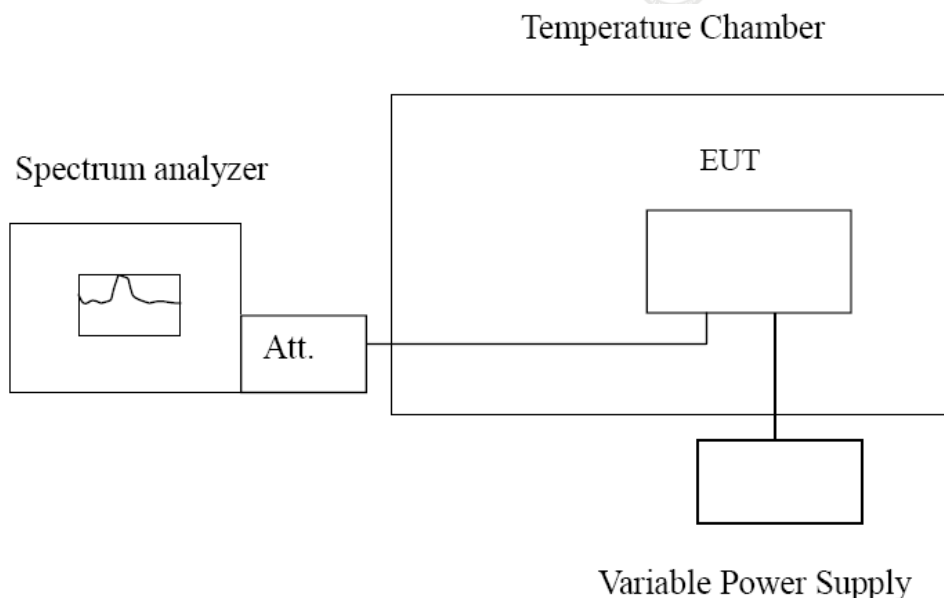

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.


TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=36 frequency=5180MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
AC 120	-30	110.98	0.021425	Within the band of operation	Pass
	-20	174.56	0.033699		
	-10	145.75	0.028137		
	0	146.61	0.028303		
	10	146.94	0.028367		
	20	99.52	0.019212		
	30	167.36	0.032309		
	40	129.48	0.024996		
	50	128.18	0.024745		
AC 132	25	195.49	0.037739	Within the band of operation	Pass
AC 108	25	118.84	0.022942		

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
AC 120	-30	135.54	0.023593	Within the band of operation	Pass
	-20	129.36	0.022517		
	-10	167.64	0.029180		
	0	169.81	0.029558		
	10	136.76	0.023805		
	20	145.26	0.025285		
	30	116.93	0.020353		
	40	168.82	0.029386		
	50	160.09	0.027866		
AC 132	25	150.49	0.026195	Within the band of operation	Pass
AC 108	25	129.53	0.022547		

5 Test Setup Photos of the EUT

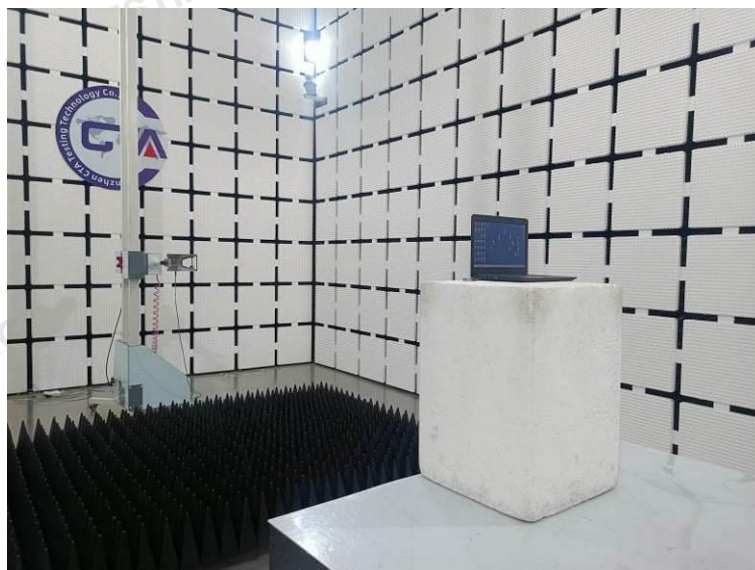

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: <http://www.cta-test.cn>

6 Photos of the EUT

Reference to the test report No. CTA24052900901.

***** End of Report *****