






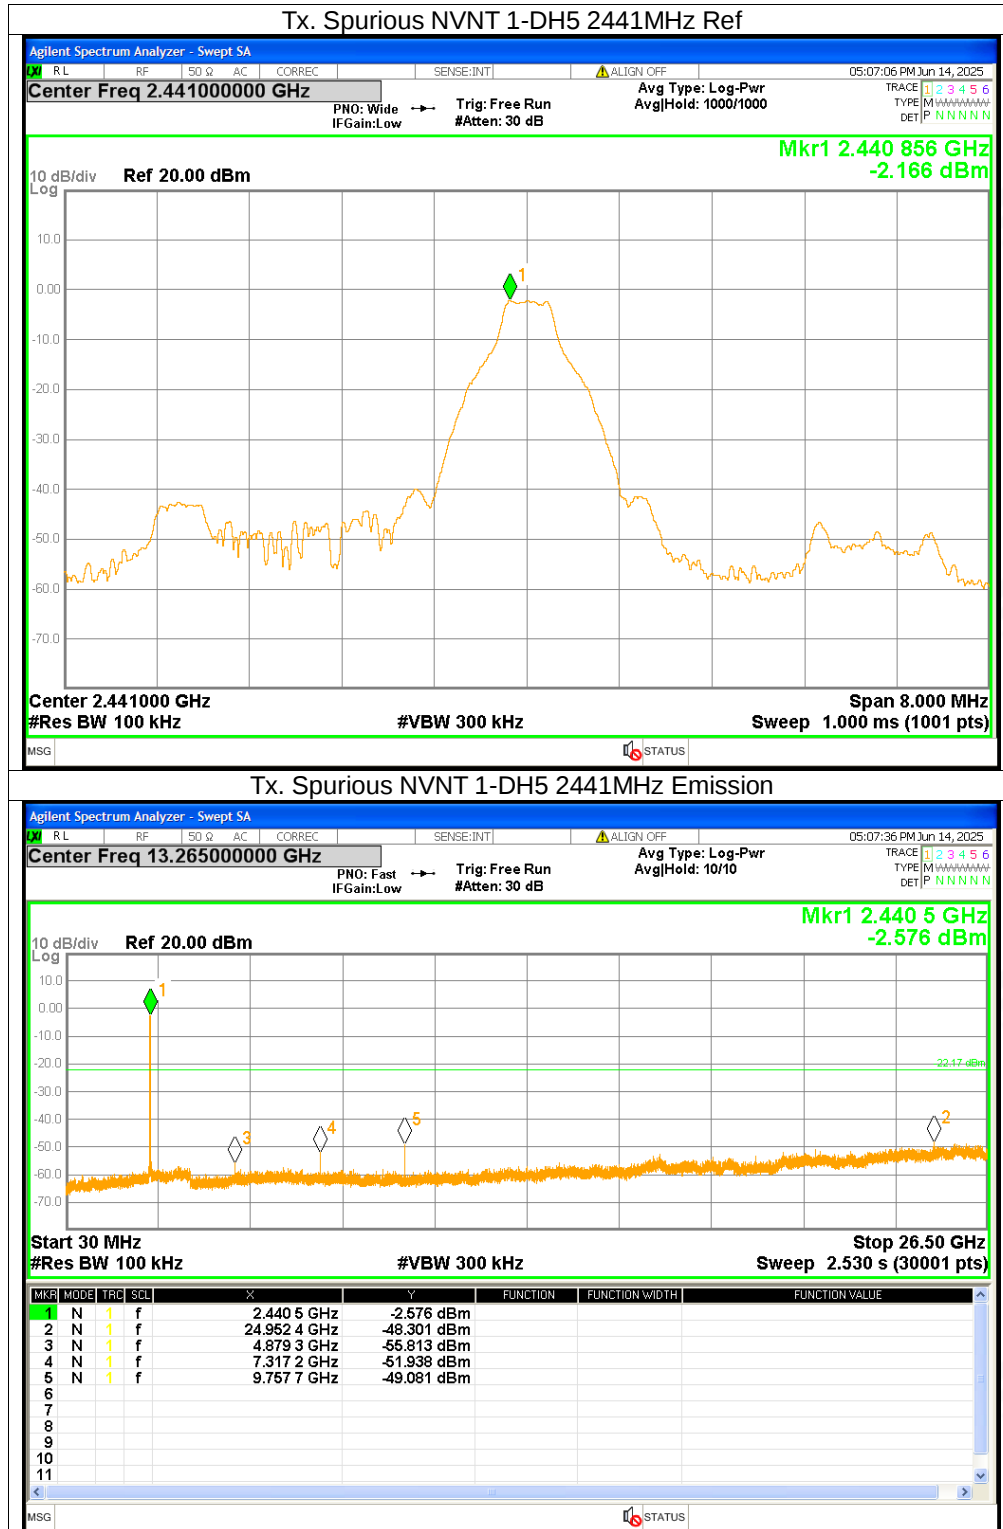

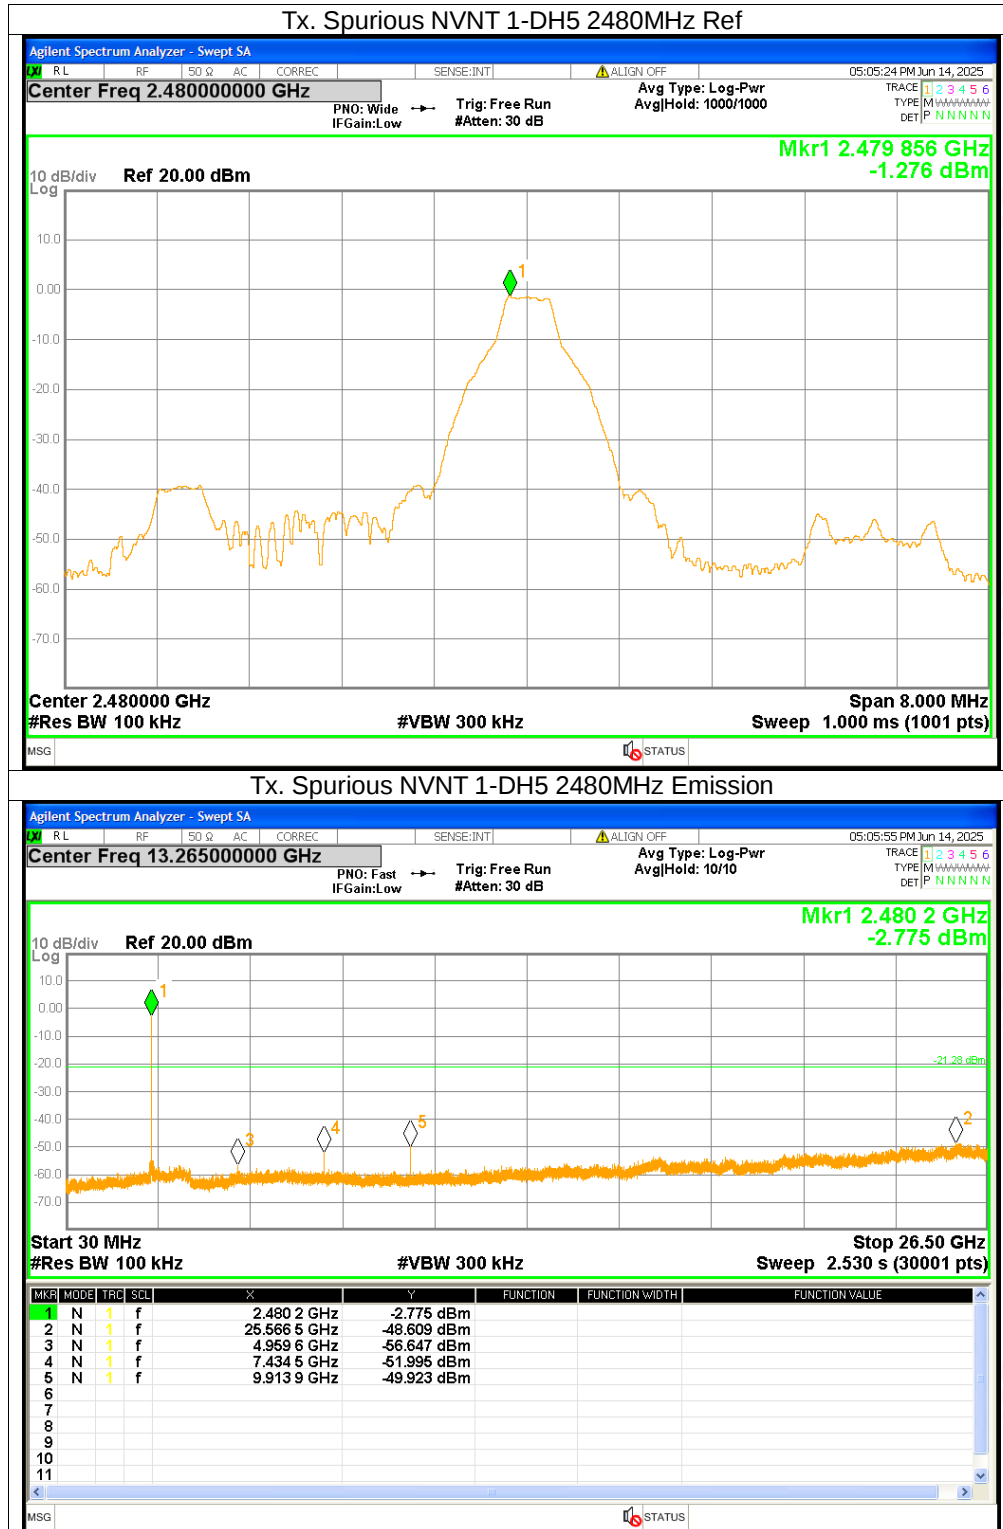

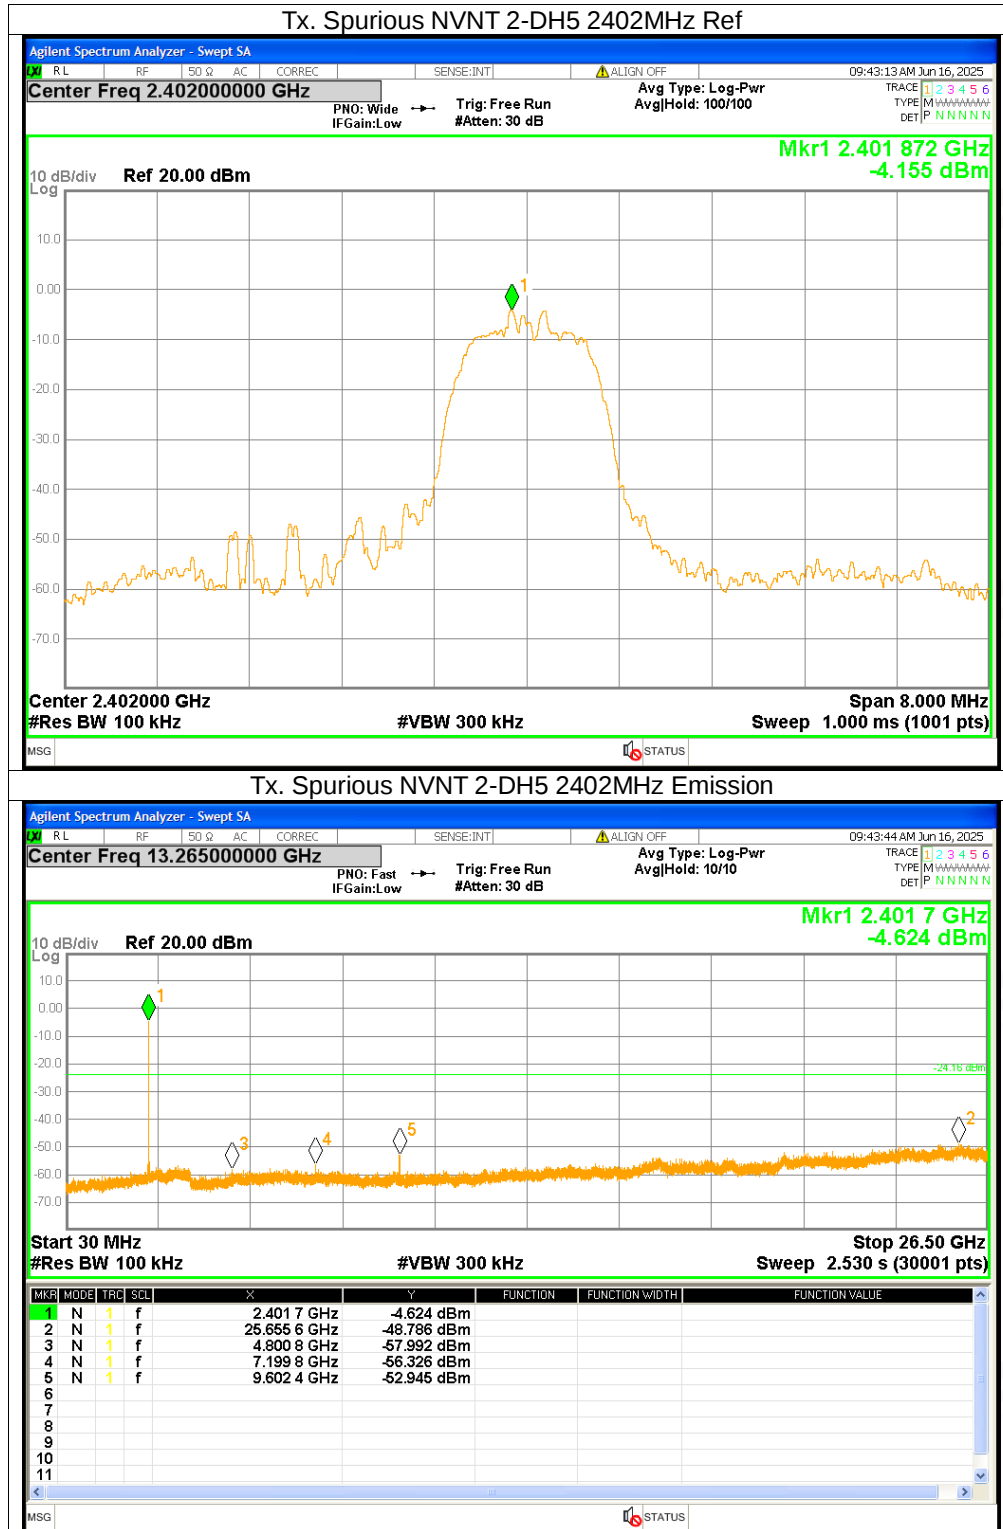

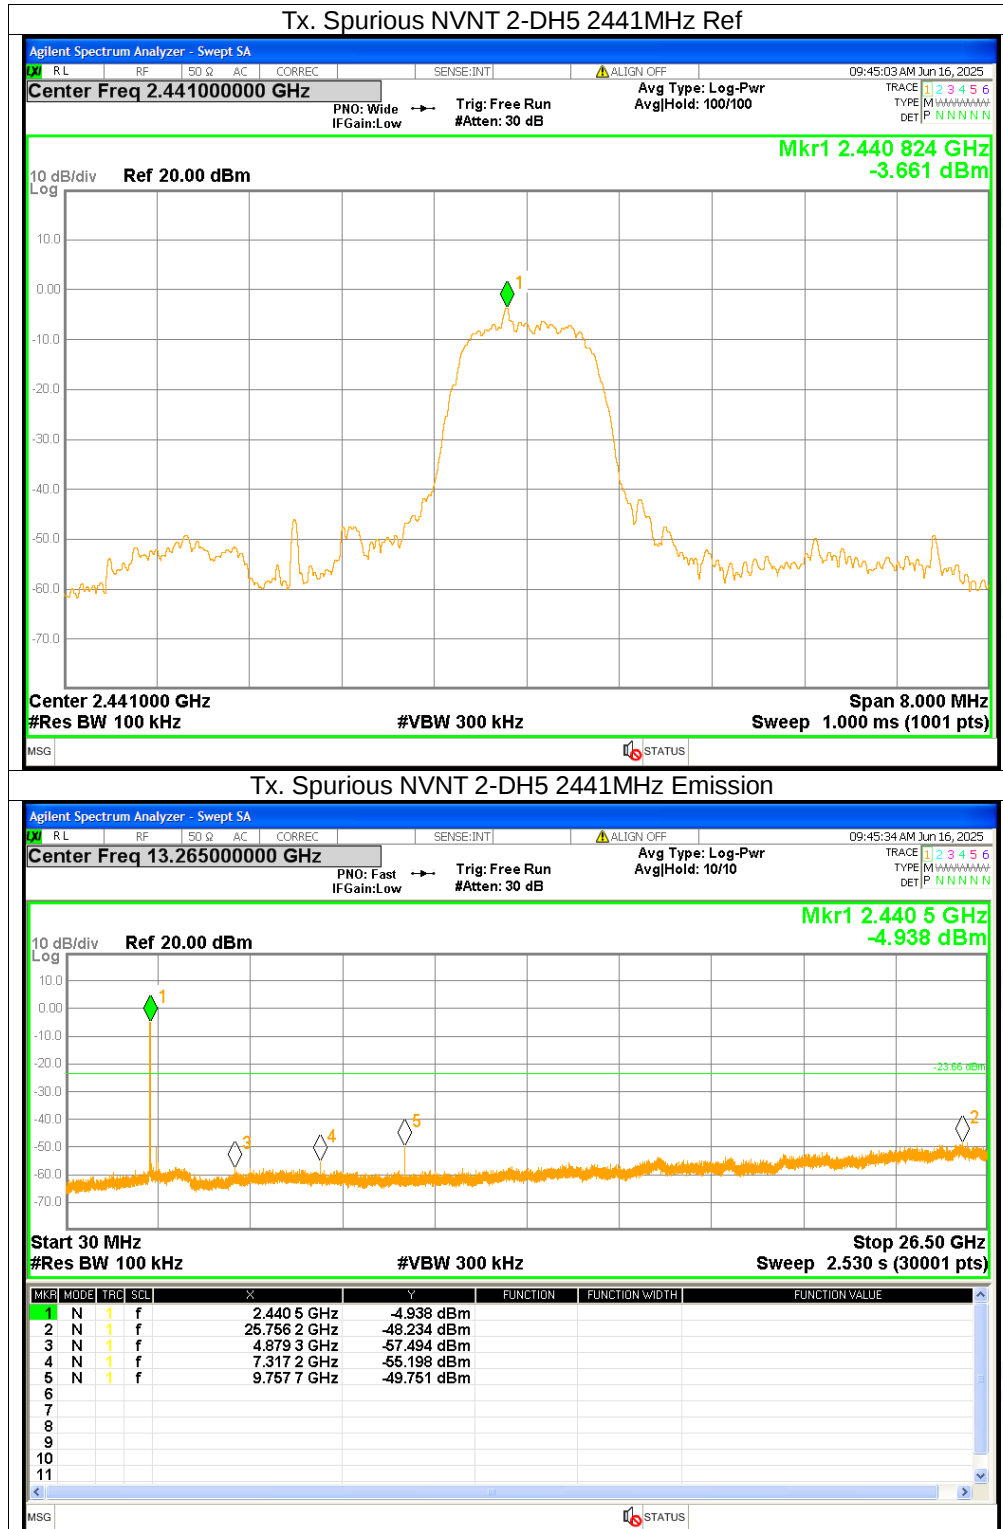


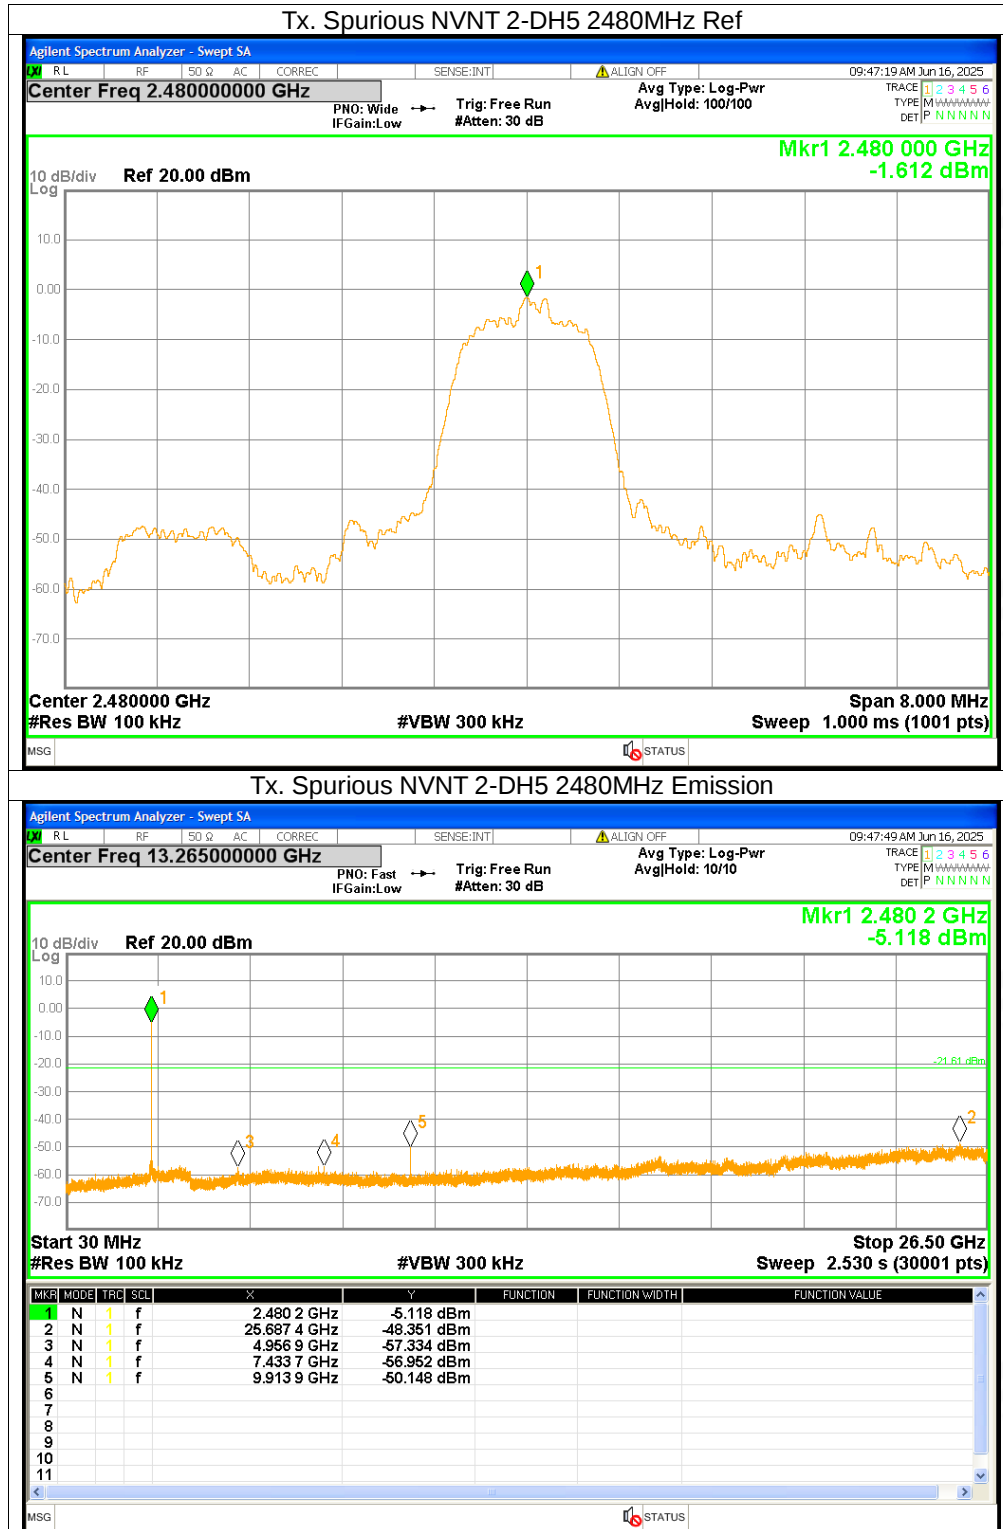







Right Dwell Time


Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	0.383	120.645	315	31600	<=400	Pass
NVNT	1-DH3	2441	1.638	270.27	165	31600	<=400	Pass
NVNT	1-DH5	2441	2.887	326.231	113	31600	<=400	Pass
NVNT	2-DH1	2441	0.392	122.696	313	31600	<=400	Pass
NVNT	2-DH3	2441	1.644	266.328	162	31600	<=400	Pass
NVNT	2-DH5	2441	2.892	315.228	109	31600	<=400	Pass


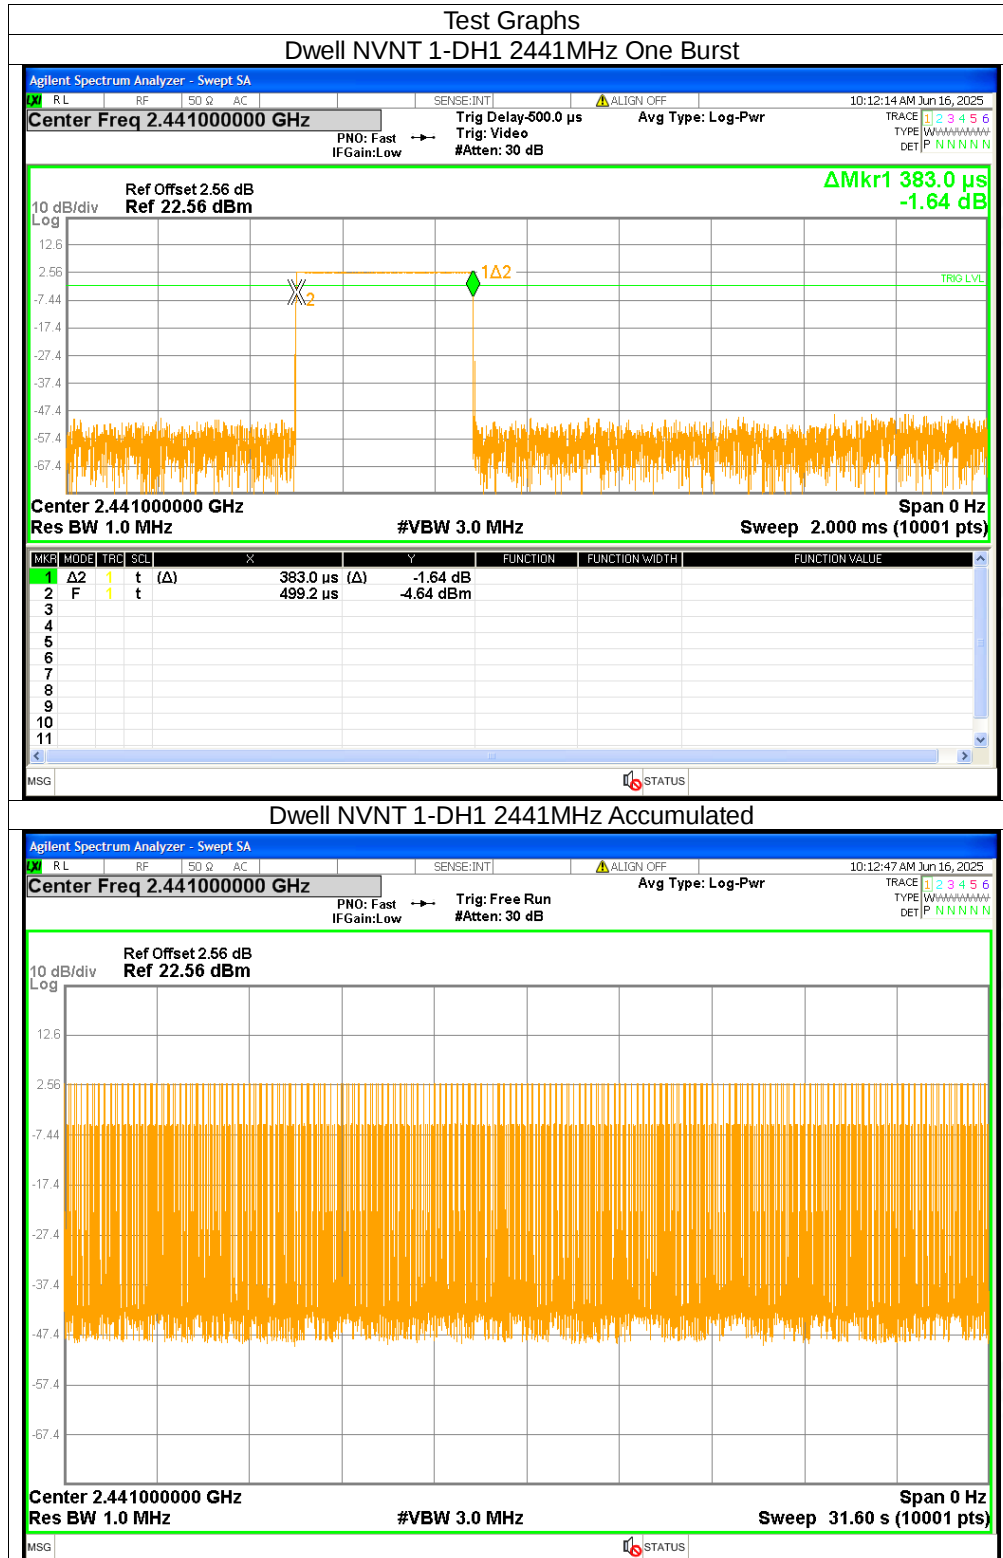


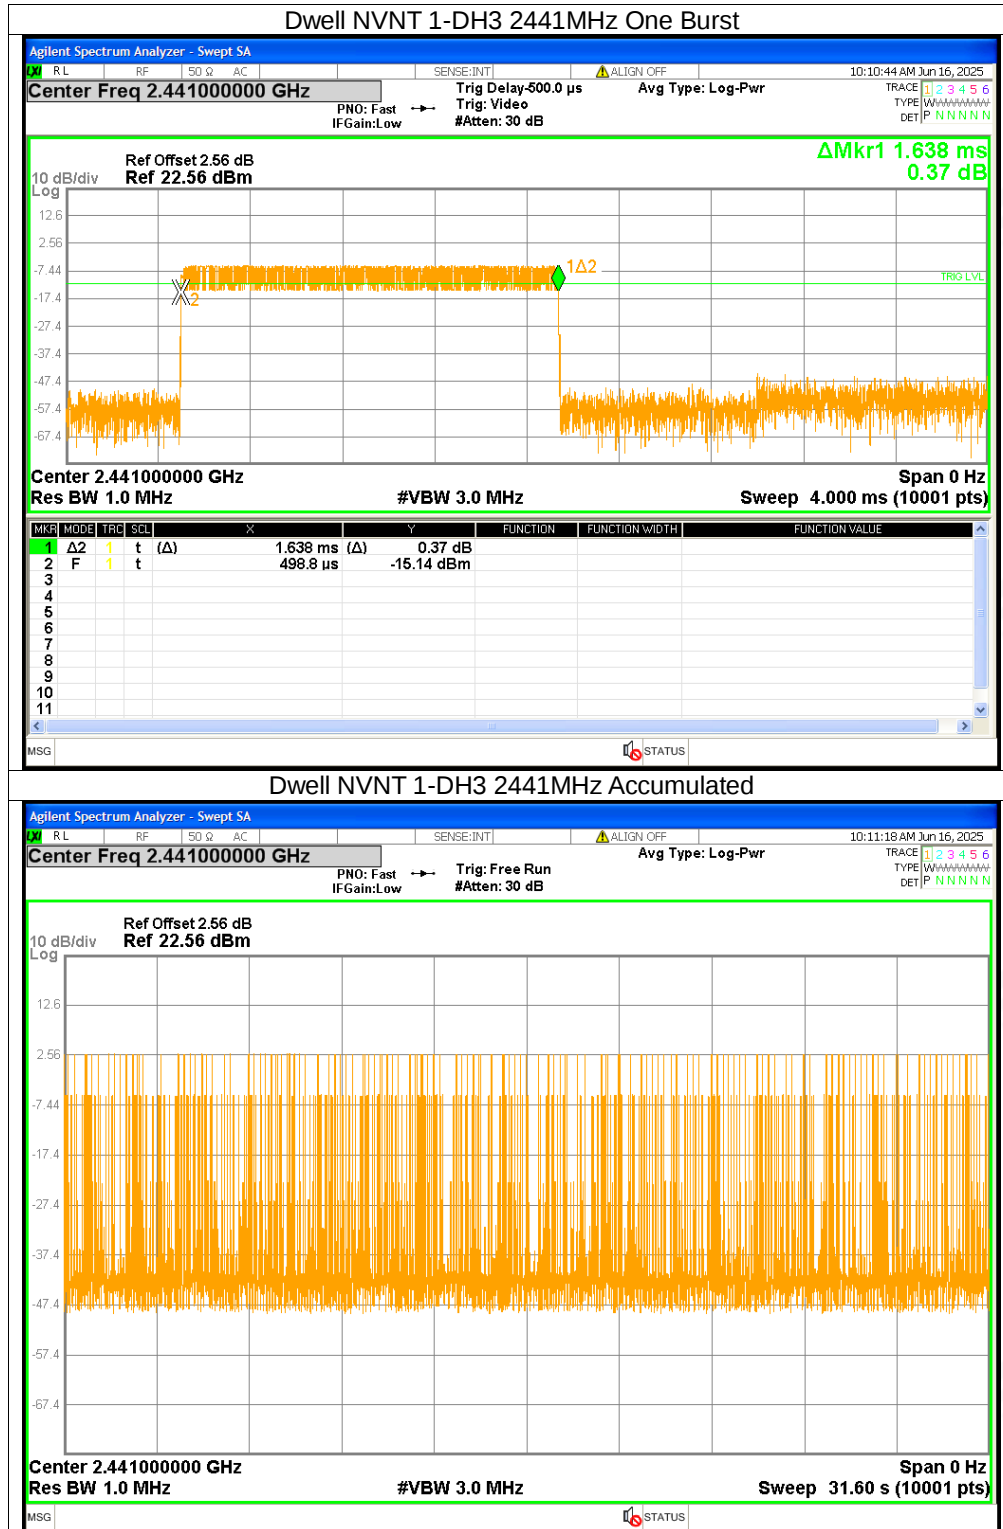

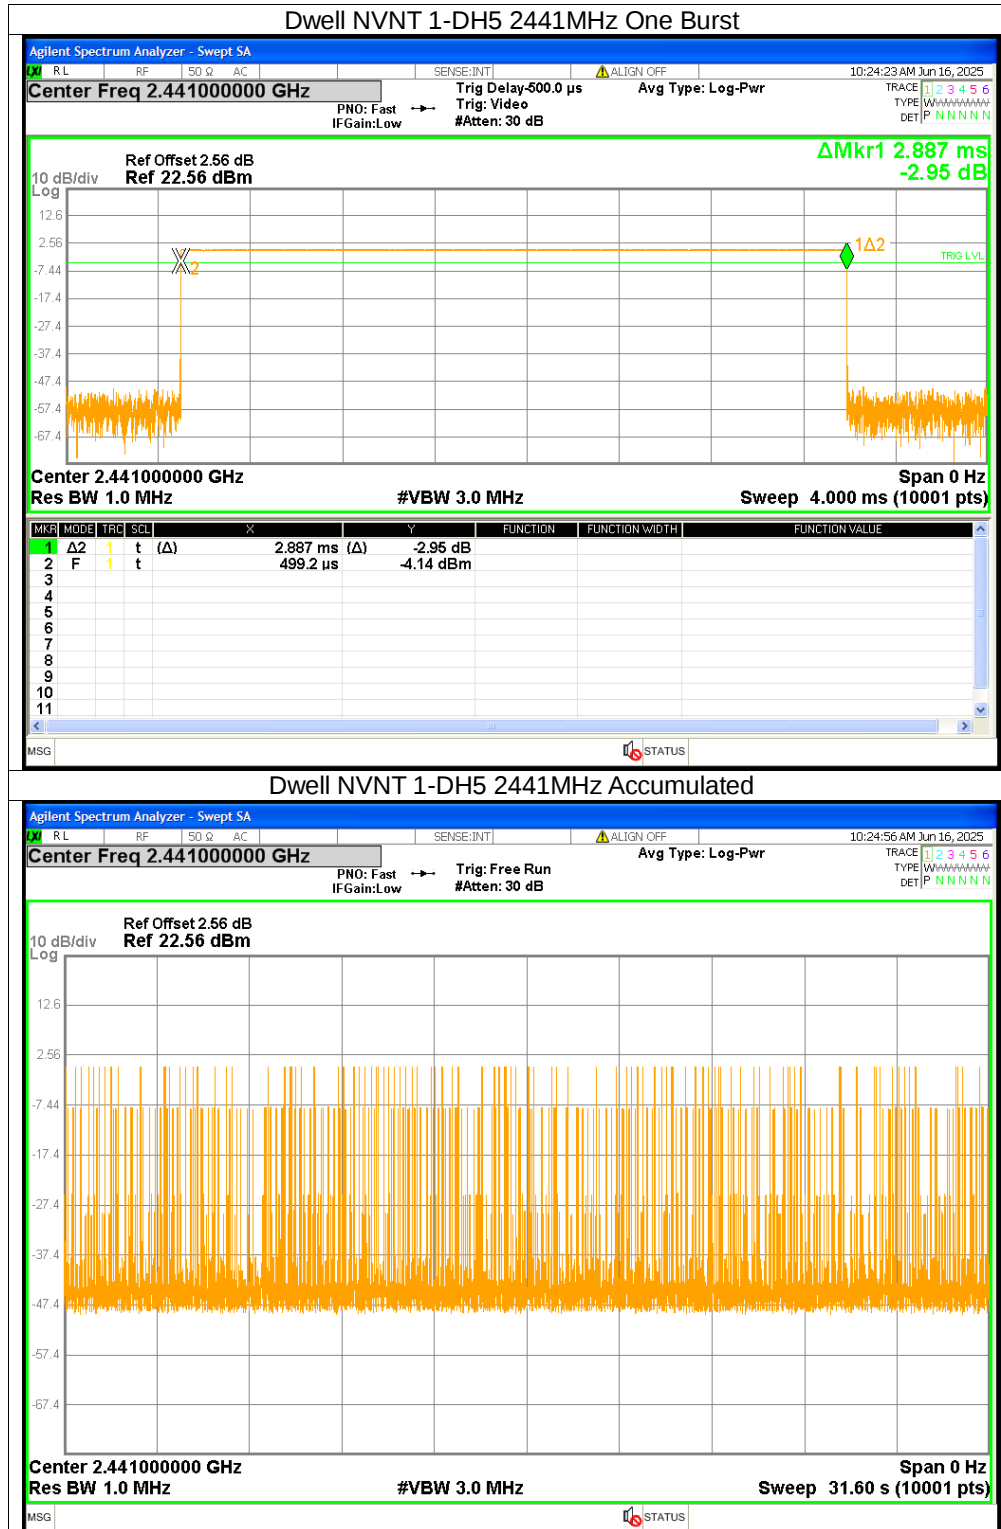

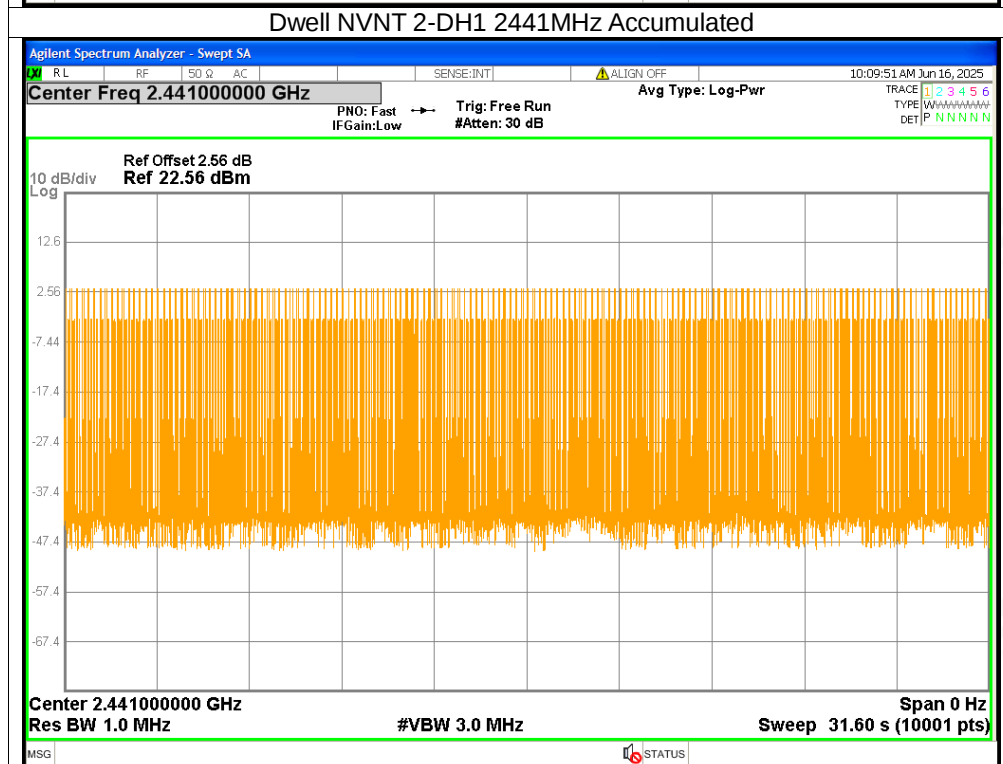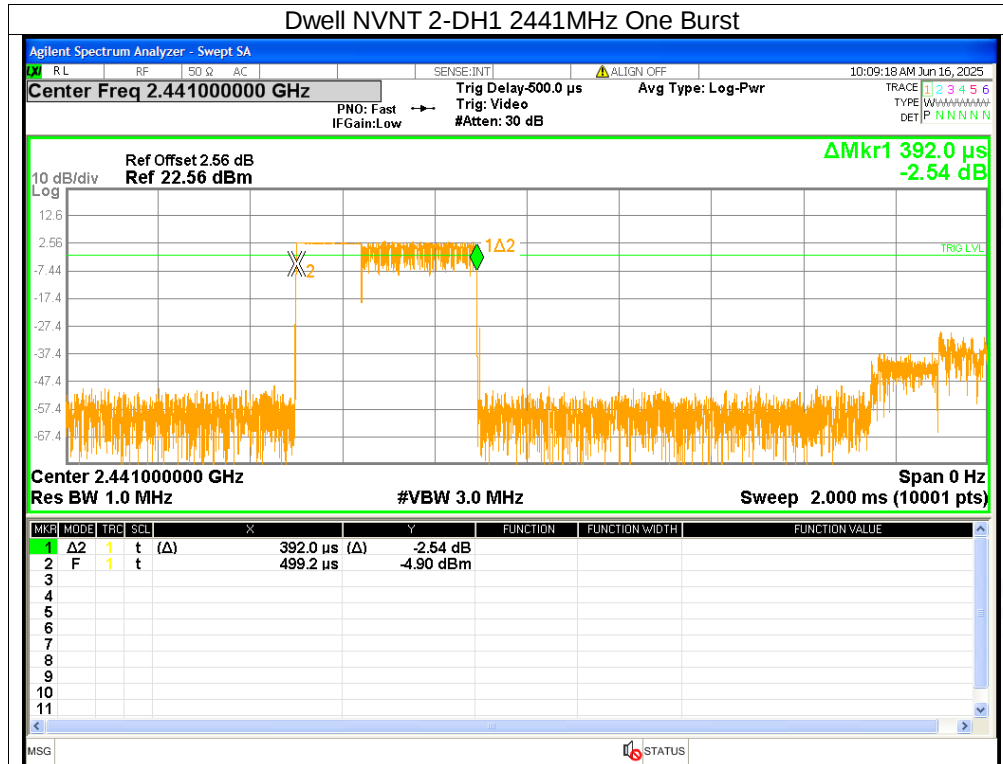

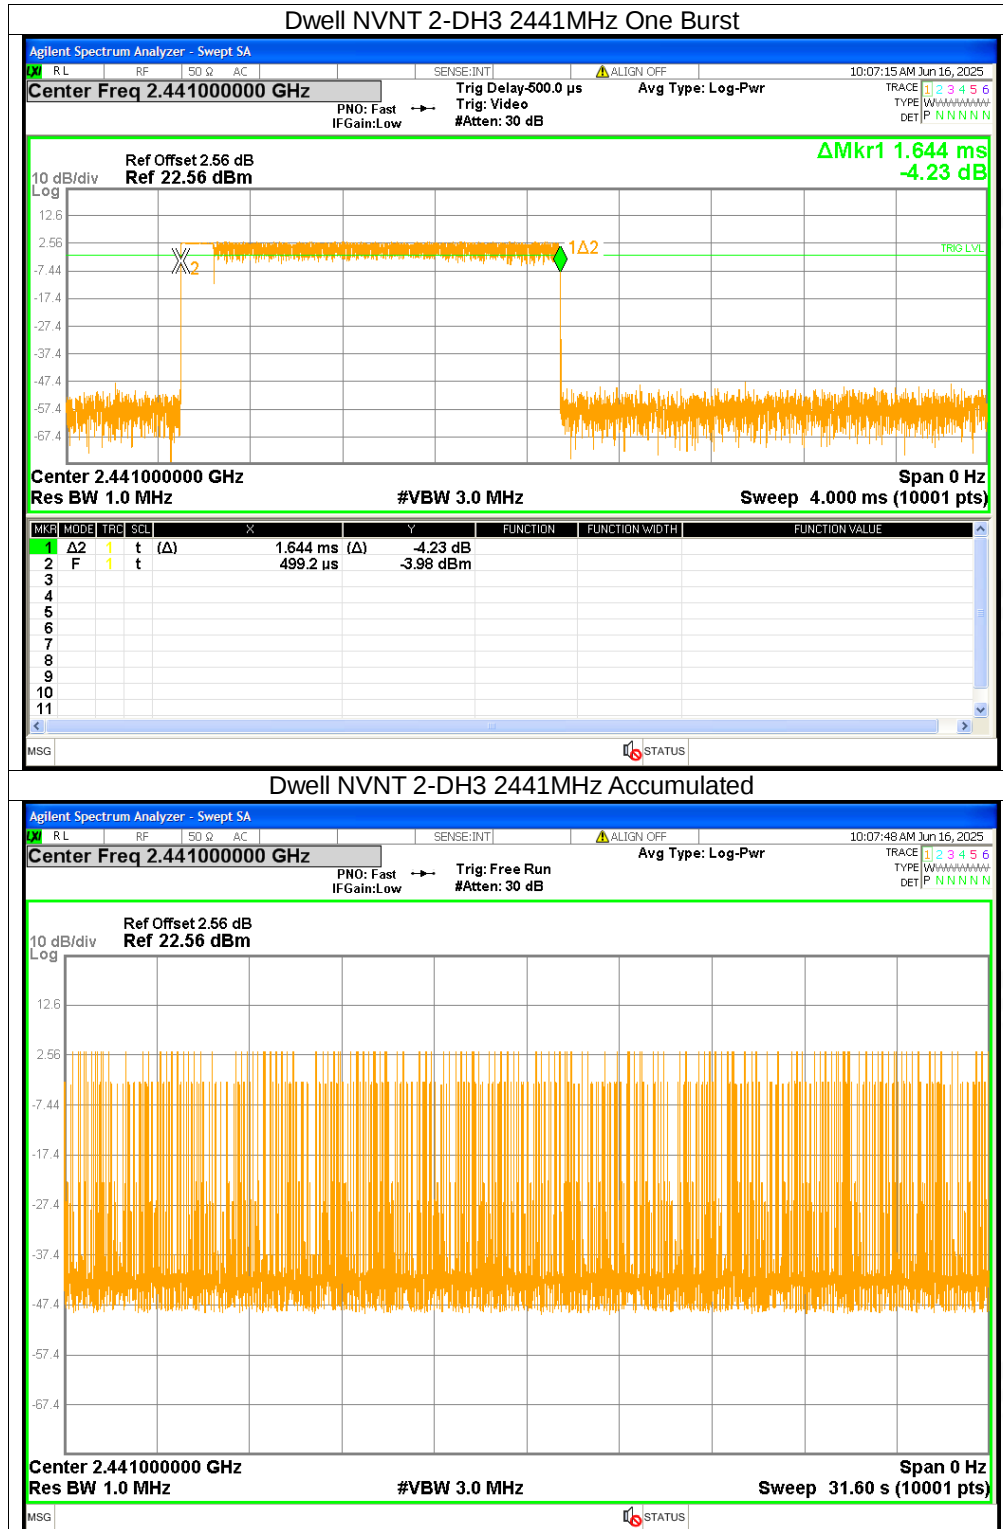


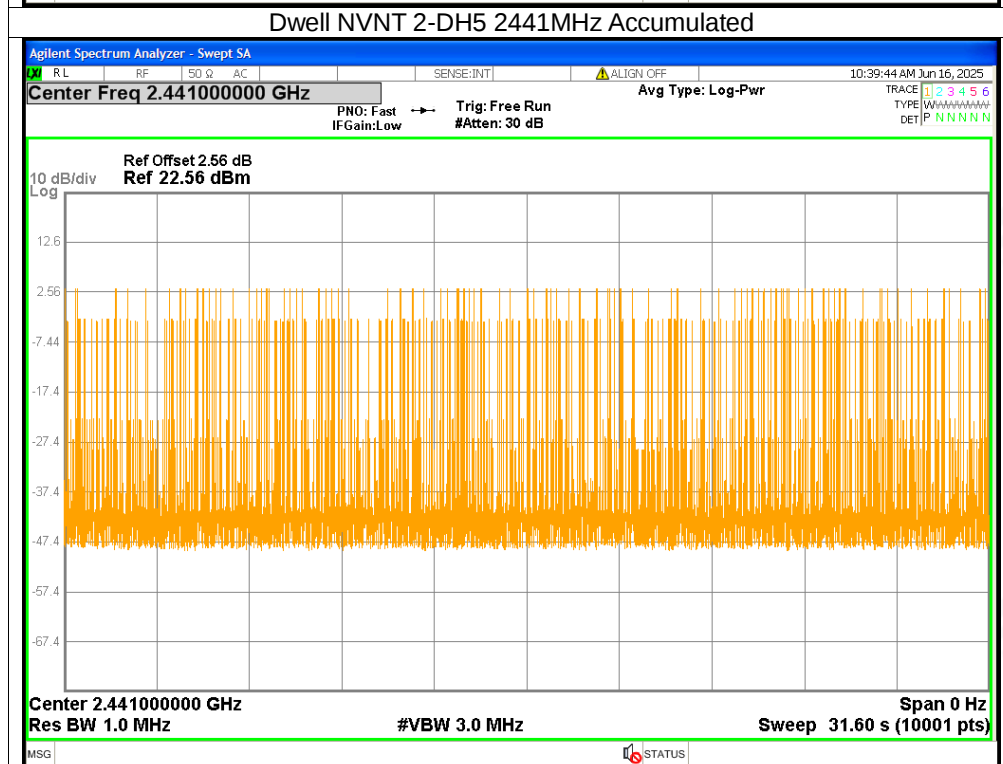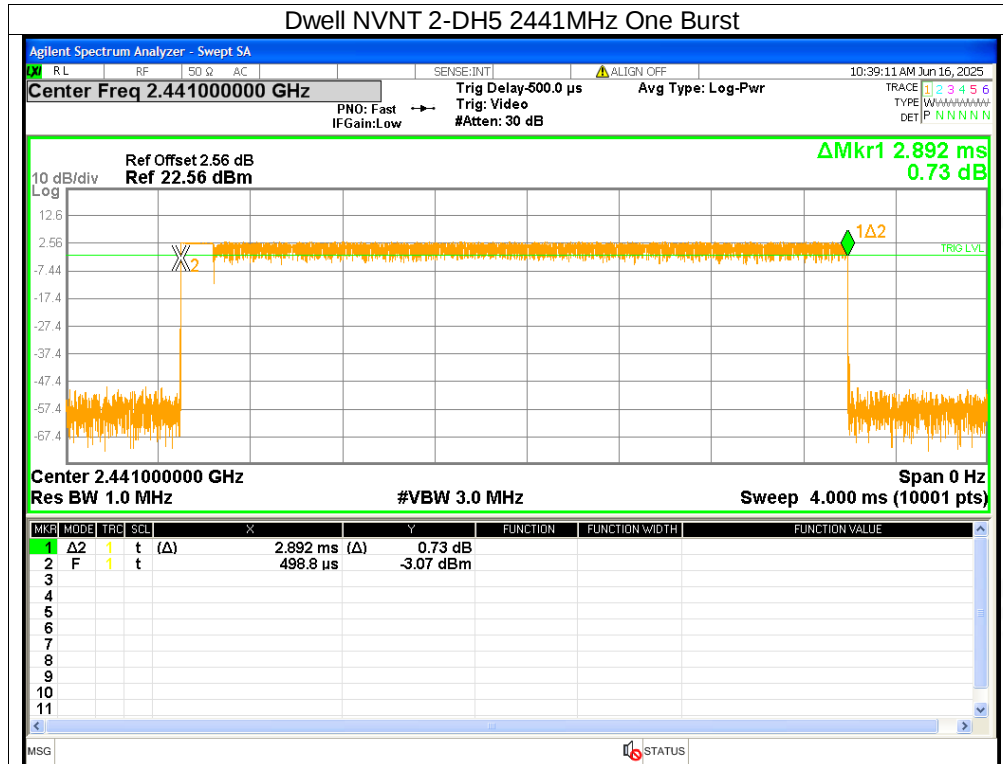





Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	1.63	≤ 30	Pass
NVNT	1-DH5	2441	0.31	≤ 30	Pass
NVNT	1-DH5	2480	1.21	≤ 30	Pass
NVNT	2-DH5	2402	2.52	≤ 21	Pass
NVNT	2-DH5	2441	1.21	≤ 21	Pass
NVNT	2-DH5	2480	2.08	≤ 21	Pass

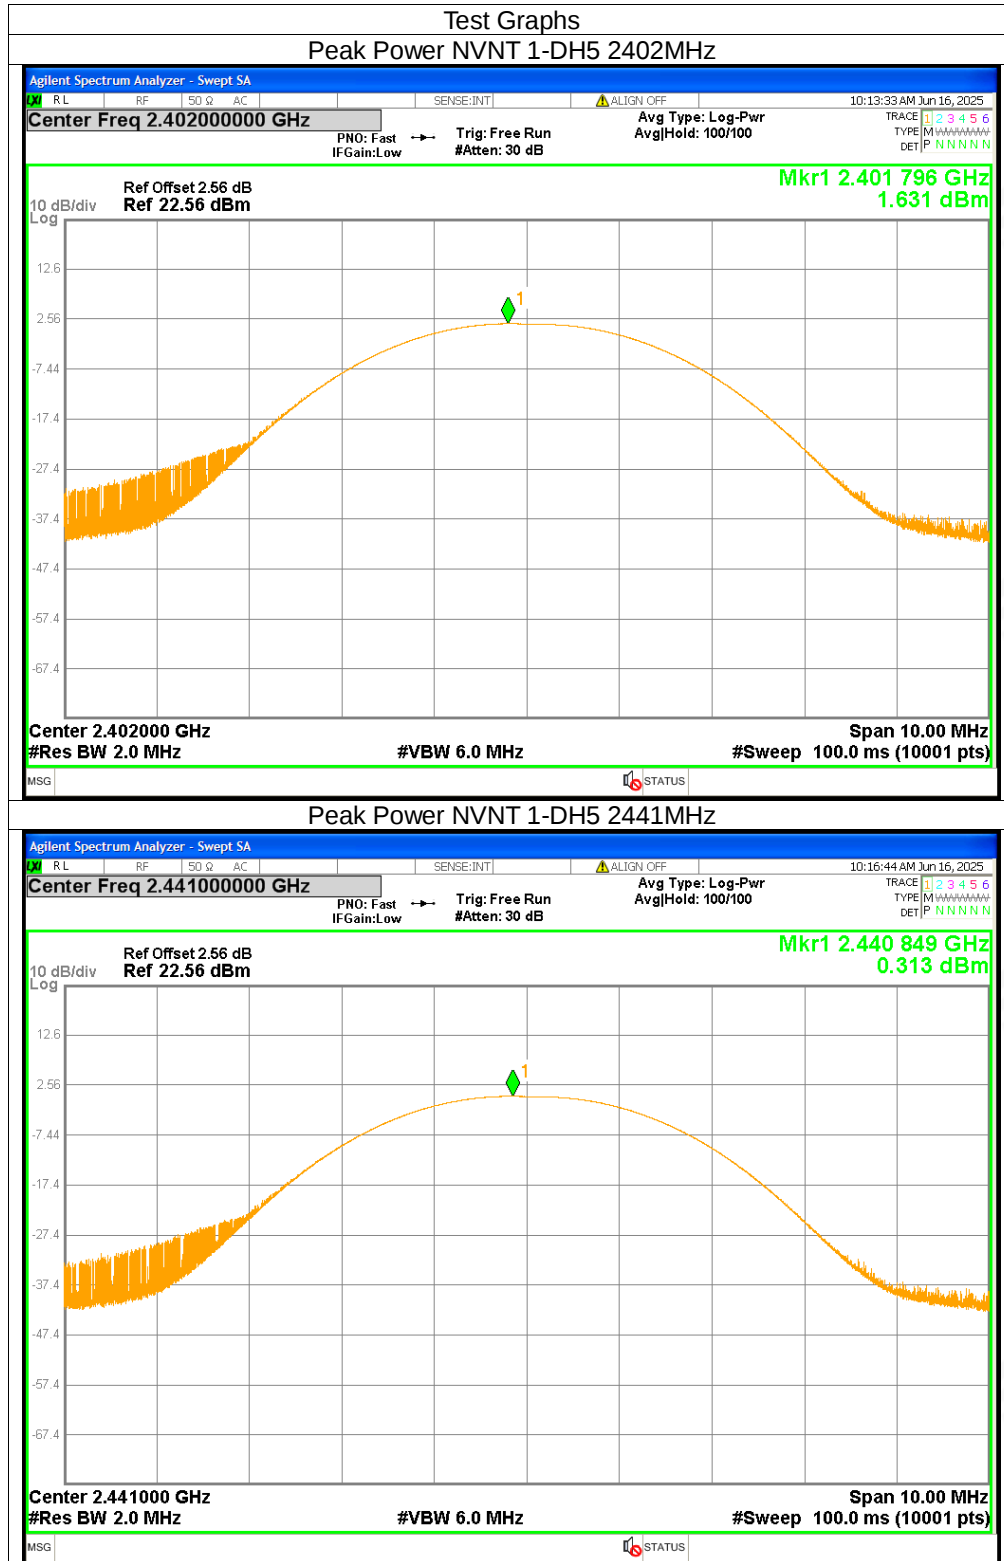


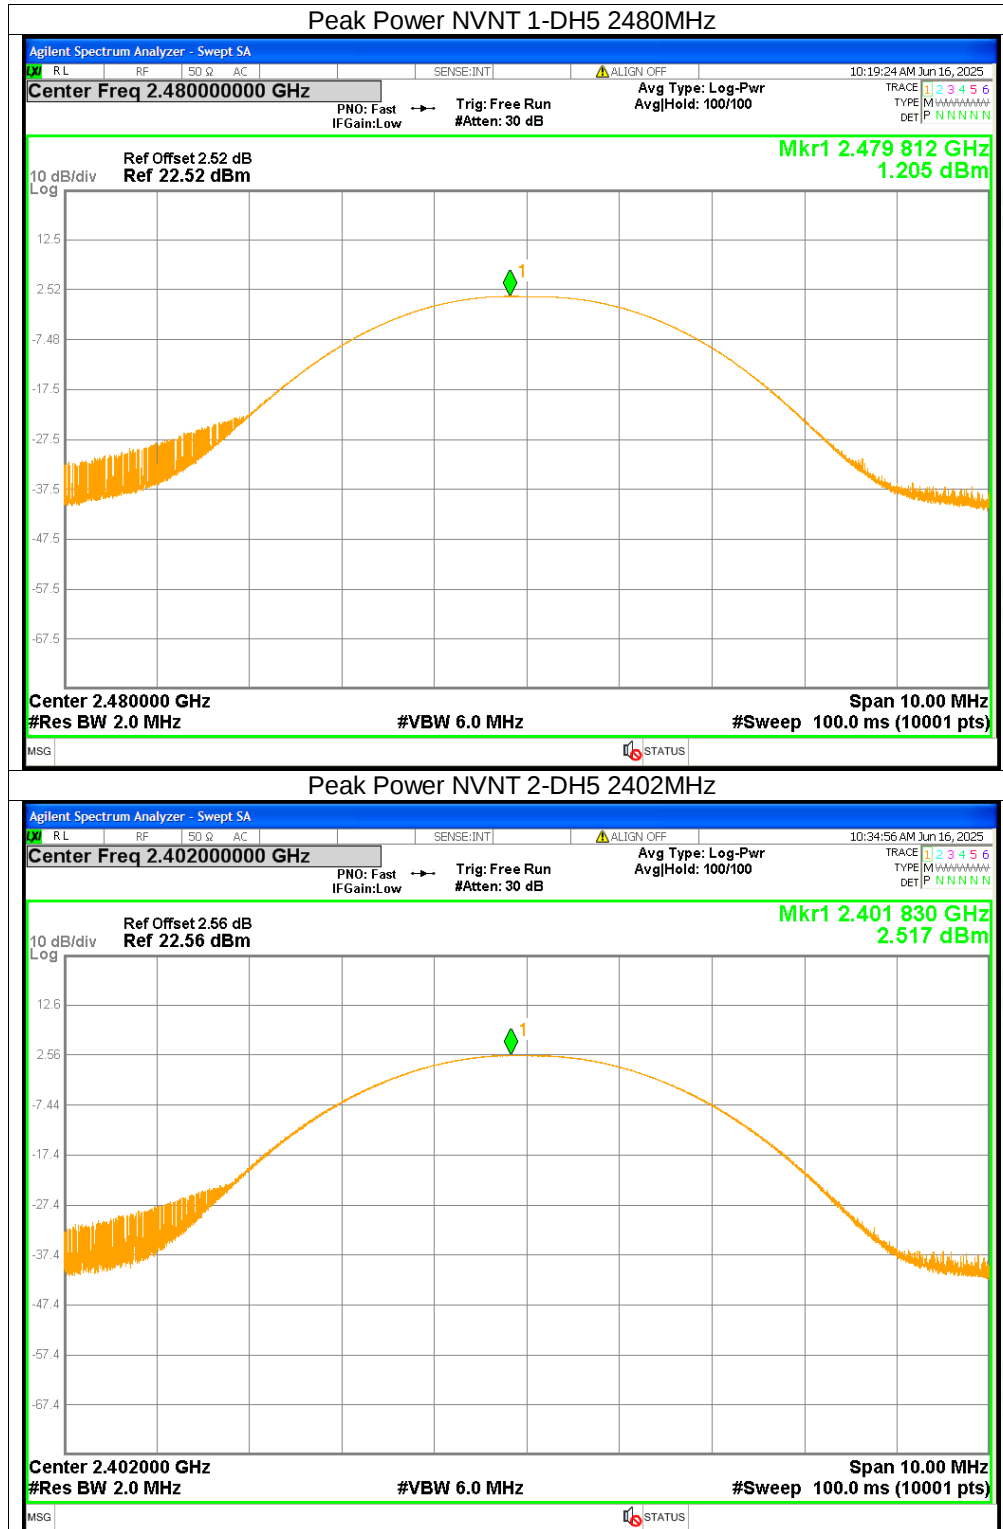


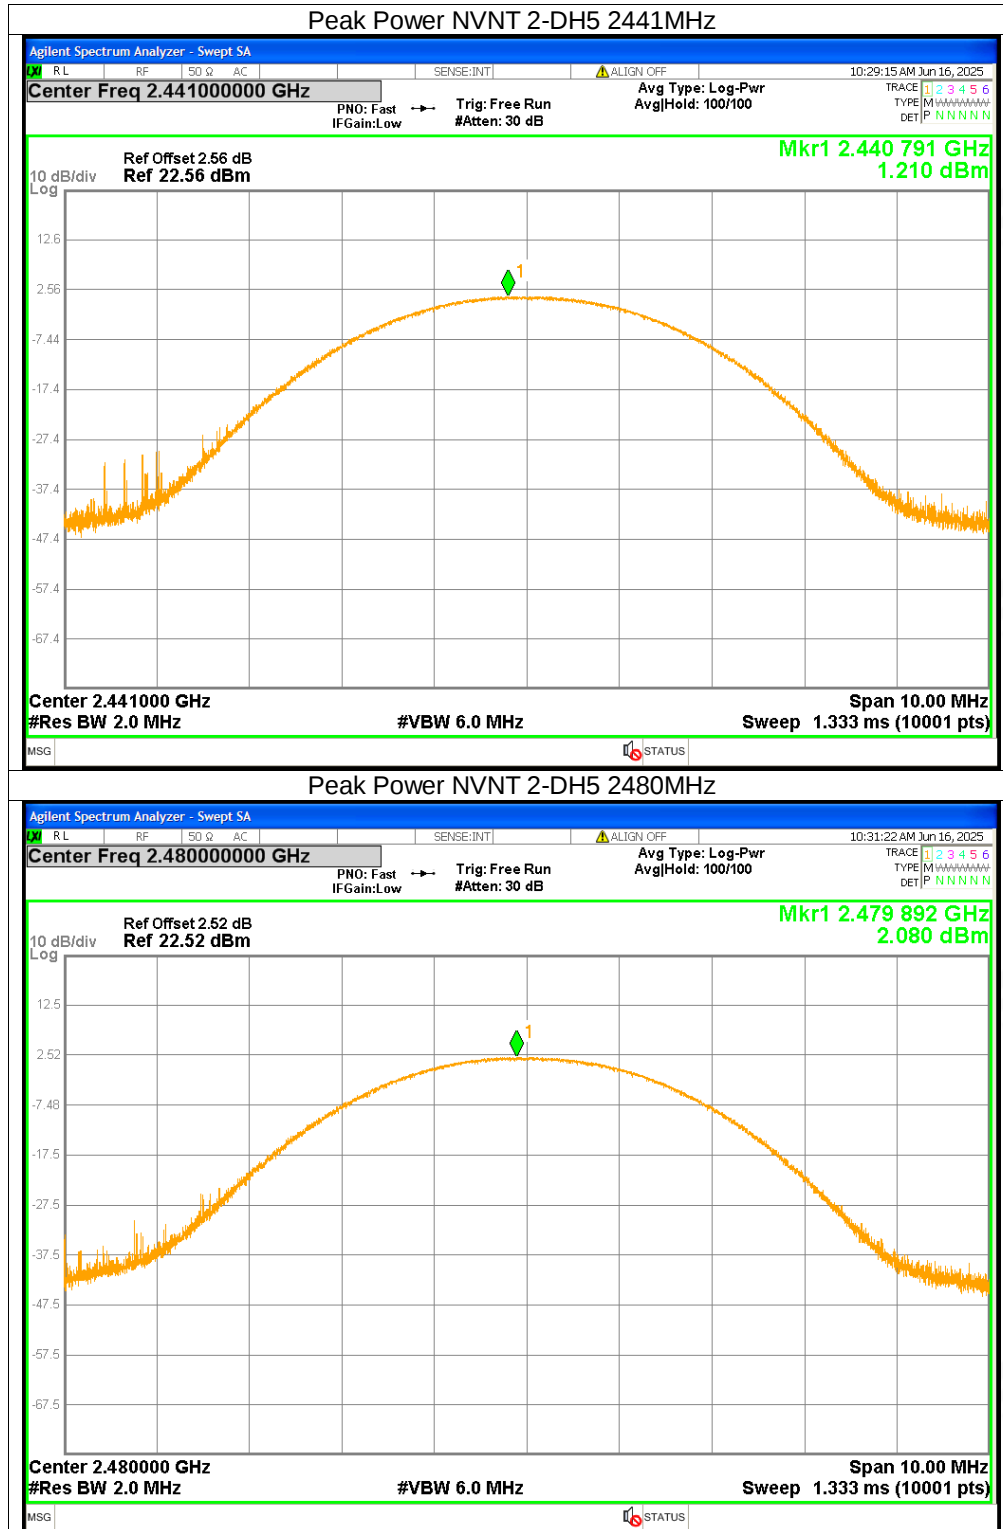


**-20dB Bandwidth**

Condition	Mode	Frequency (MHz)	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	0.9401	Pass
NVNT	1-DH5	2441	0.9395	Pass
NVNT	1-DH5	2480	0.9497	Pass
NVNT	2-DH5	2402	1.2768	Pass
NVNT	2-DH5	2441	1.2783	Pass
NVNT	2-DH5	2480	1.3084	Pass

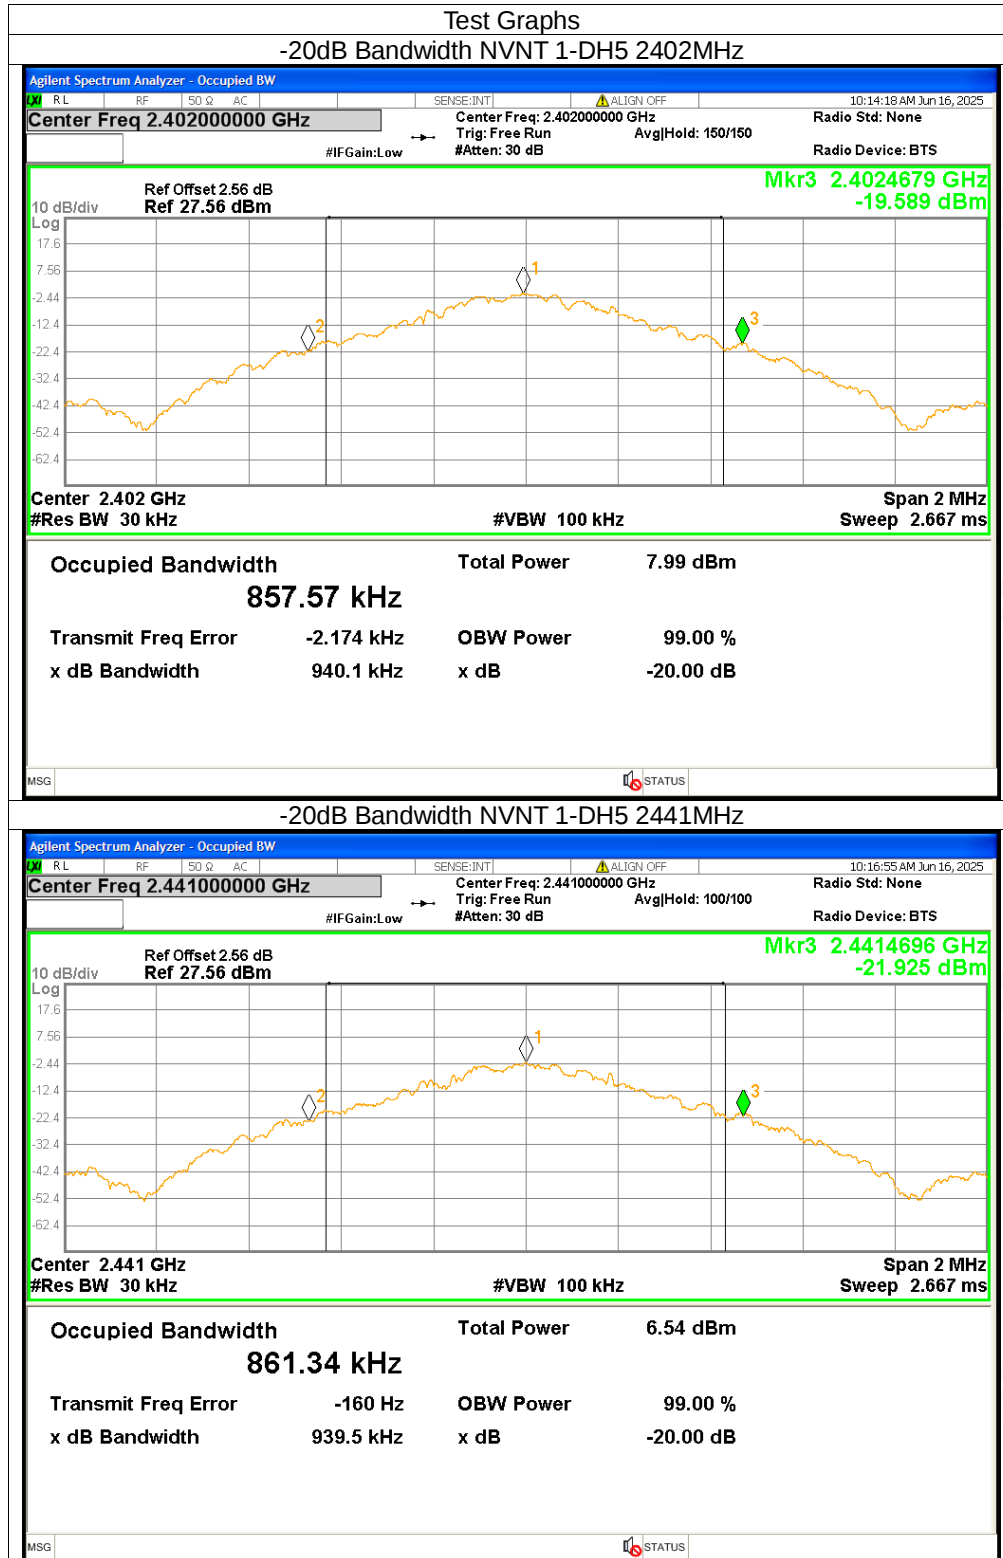

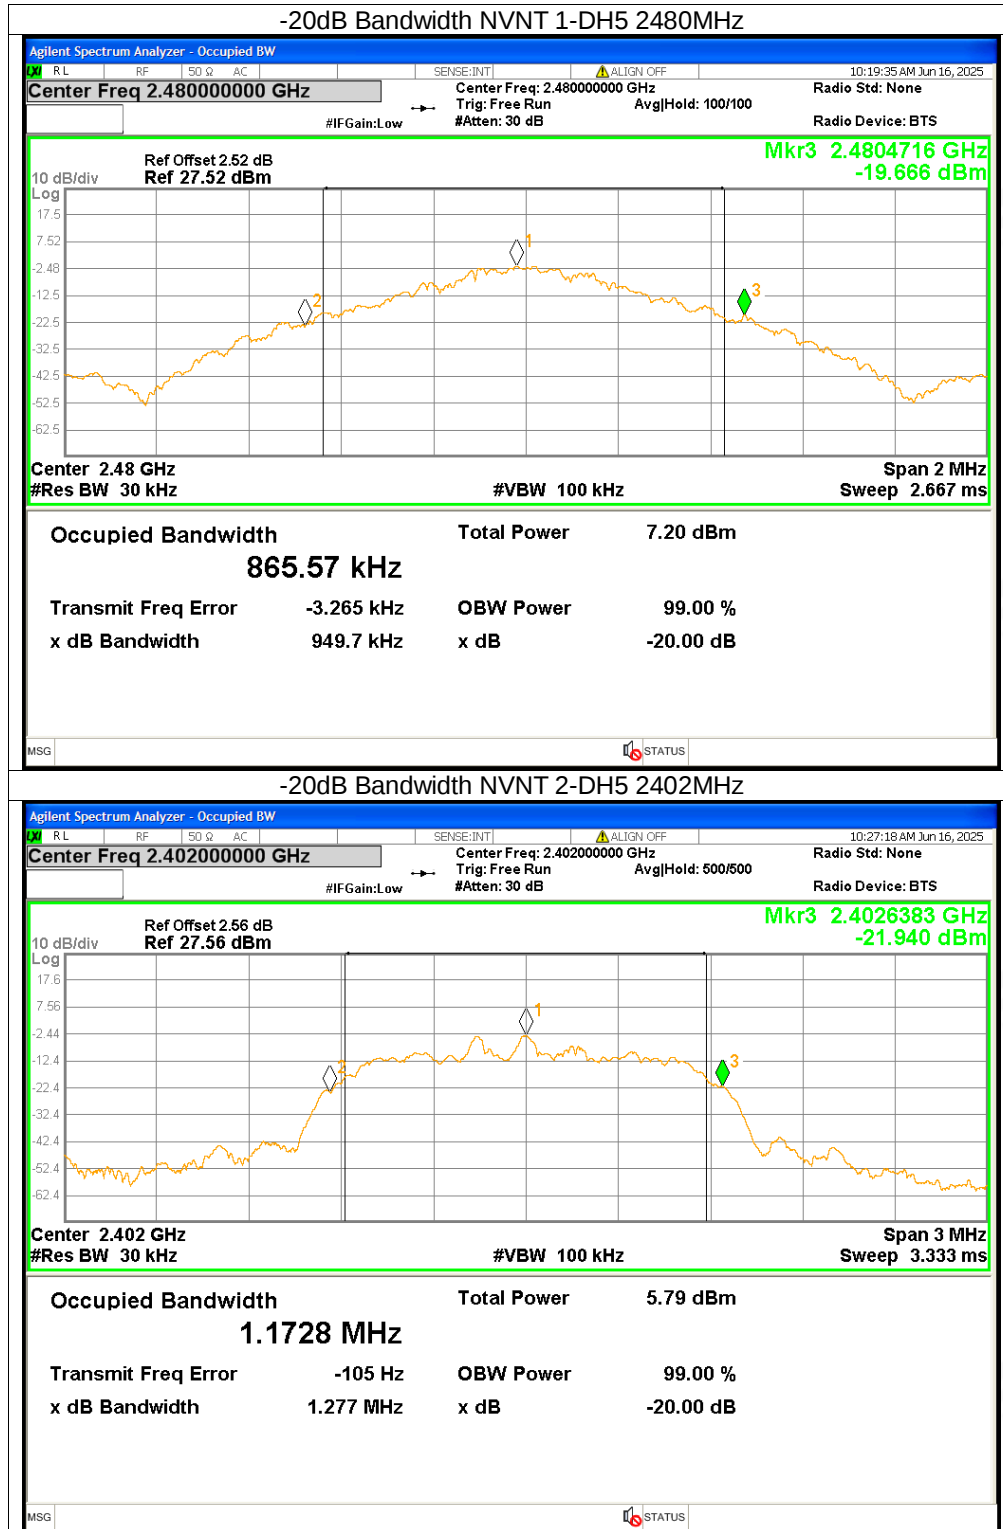


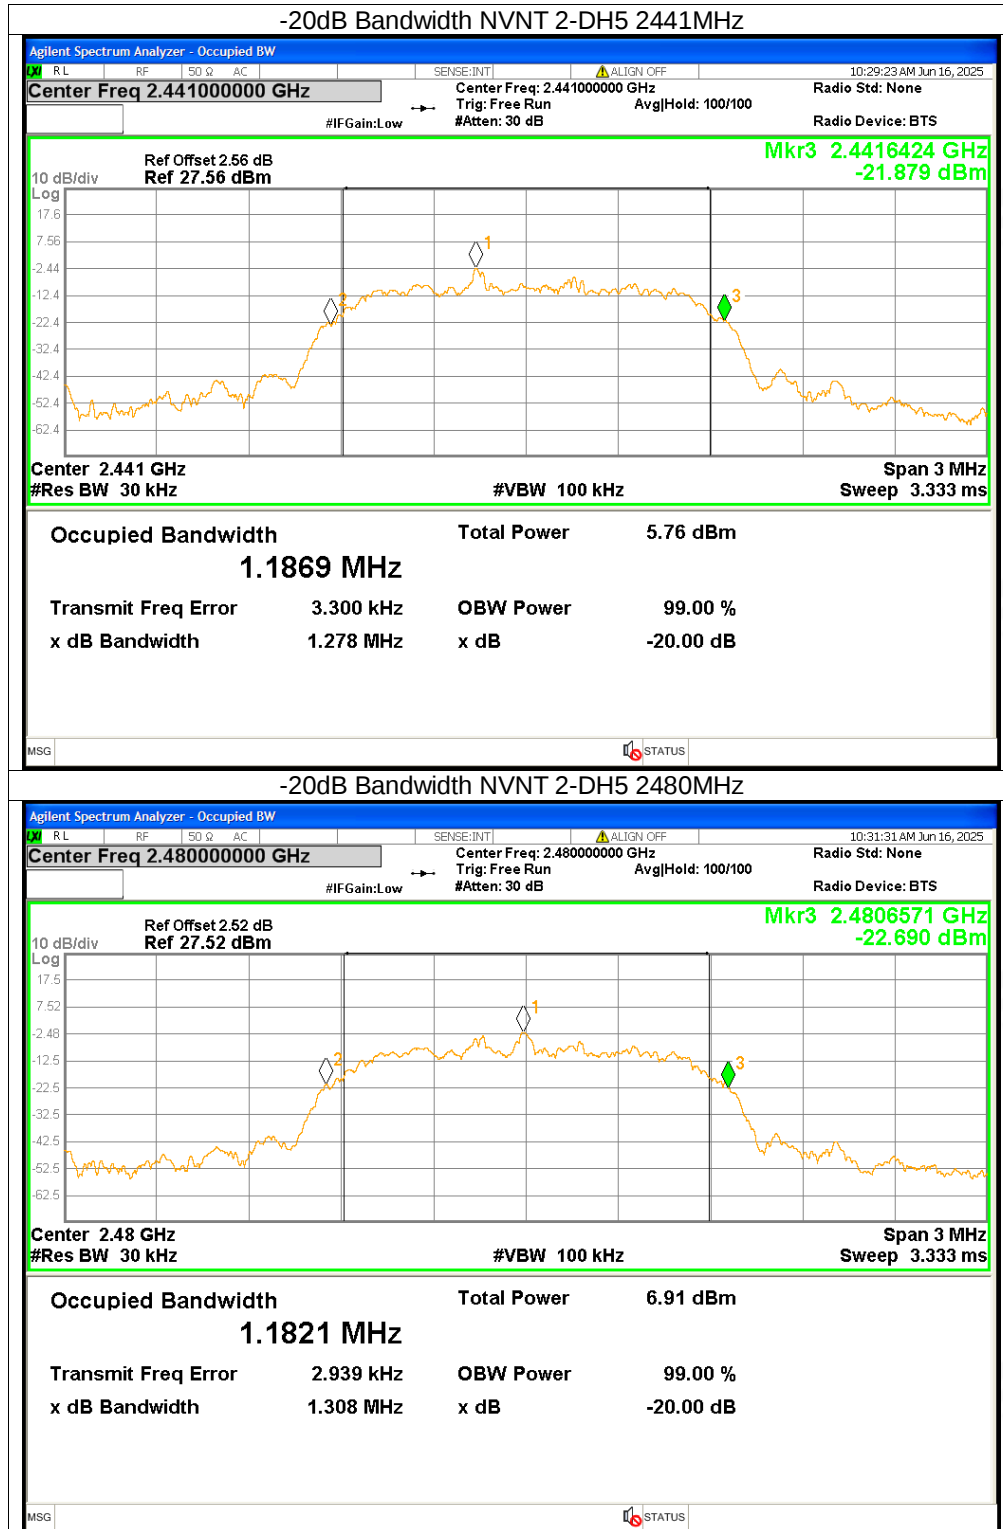





Carrier Frequencies Separation

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	2401.848	2402.852	1.004	≥ 0.94	Pass
NVNT	1-DH5	2440.85	2441.846	0.996	≥ 0.94	Pass
NVNT	1-DH5	2478.84	2479.838	0.998	≥ 0.95	Pass
NVNT	2-DH5	2401.996	2402.857	0.861	≥ 0.851	Pass
NVNT	2-DH5	2440.837	2442.121	1.284	≥ 0.852	Pass
NVNT	2-DH5	2479.158	2480.13	0.972	≥ 0.872	Pass

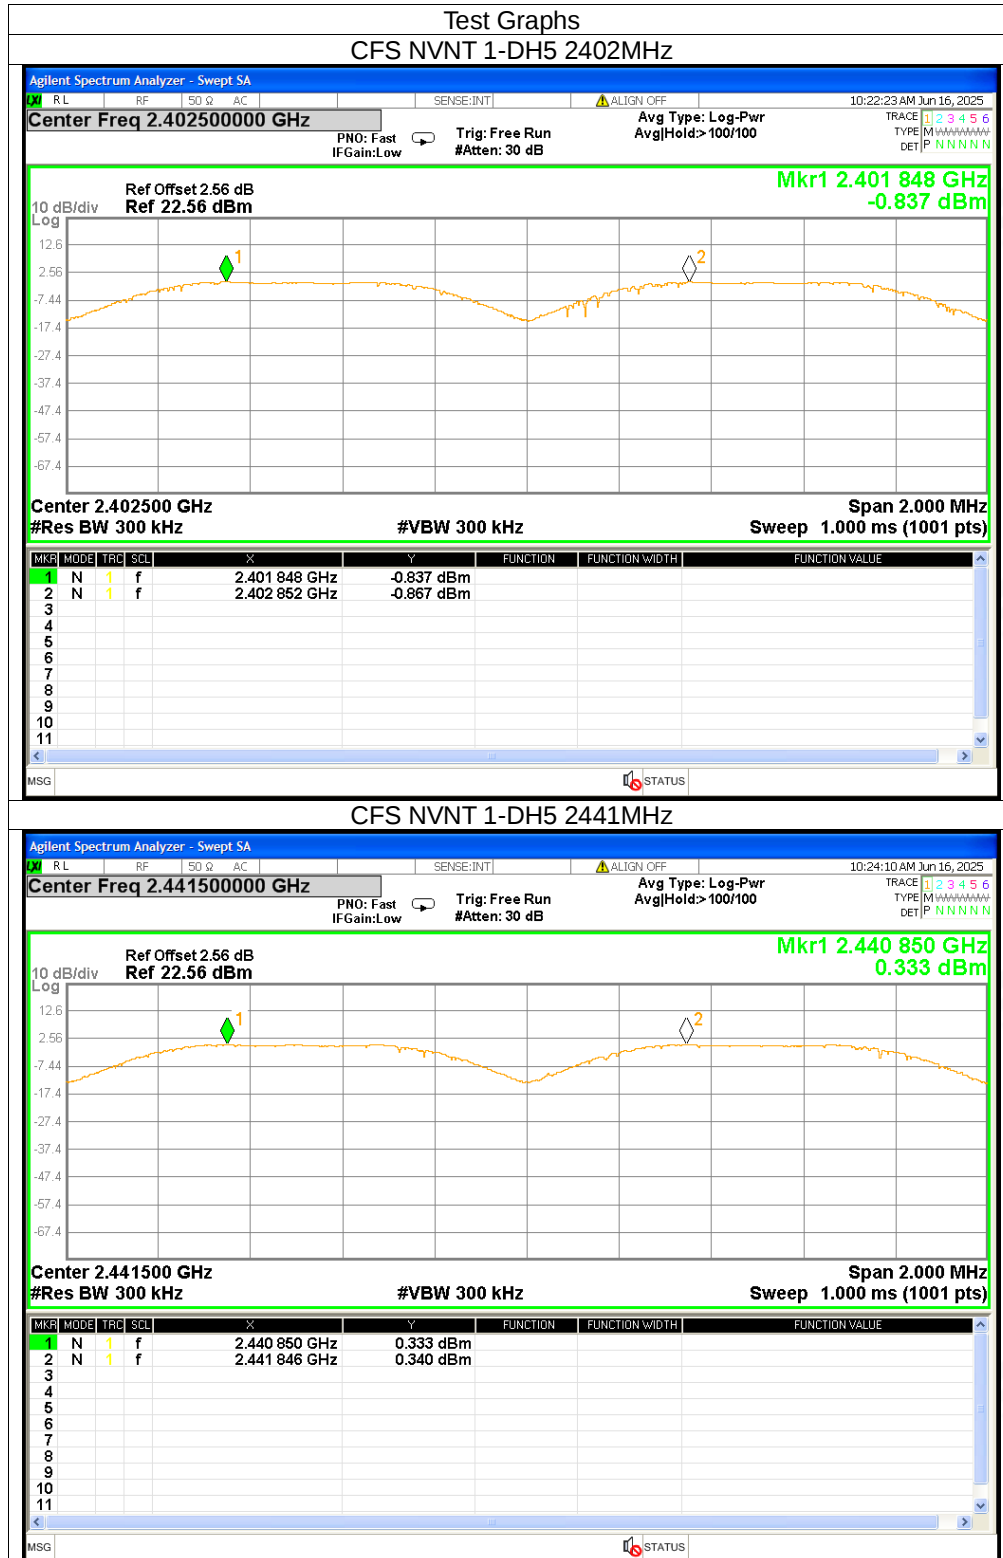

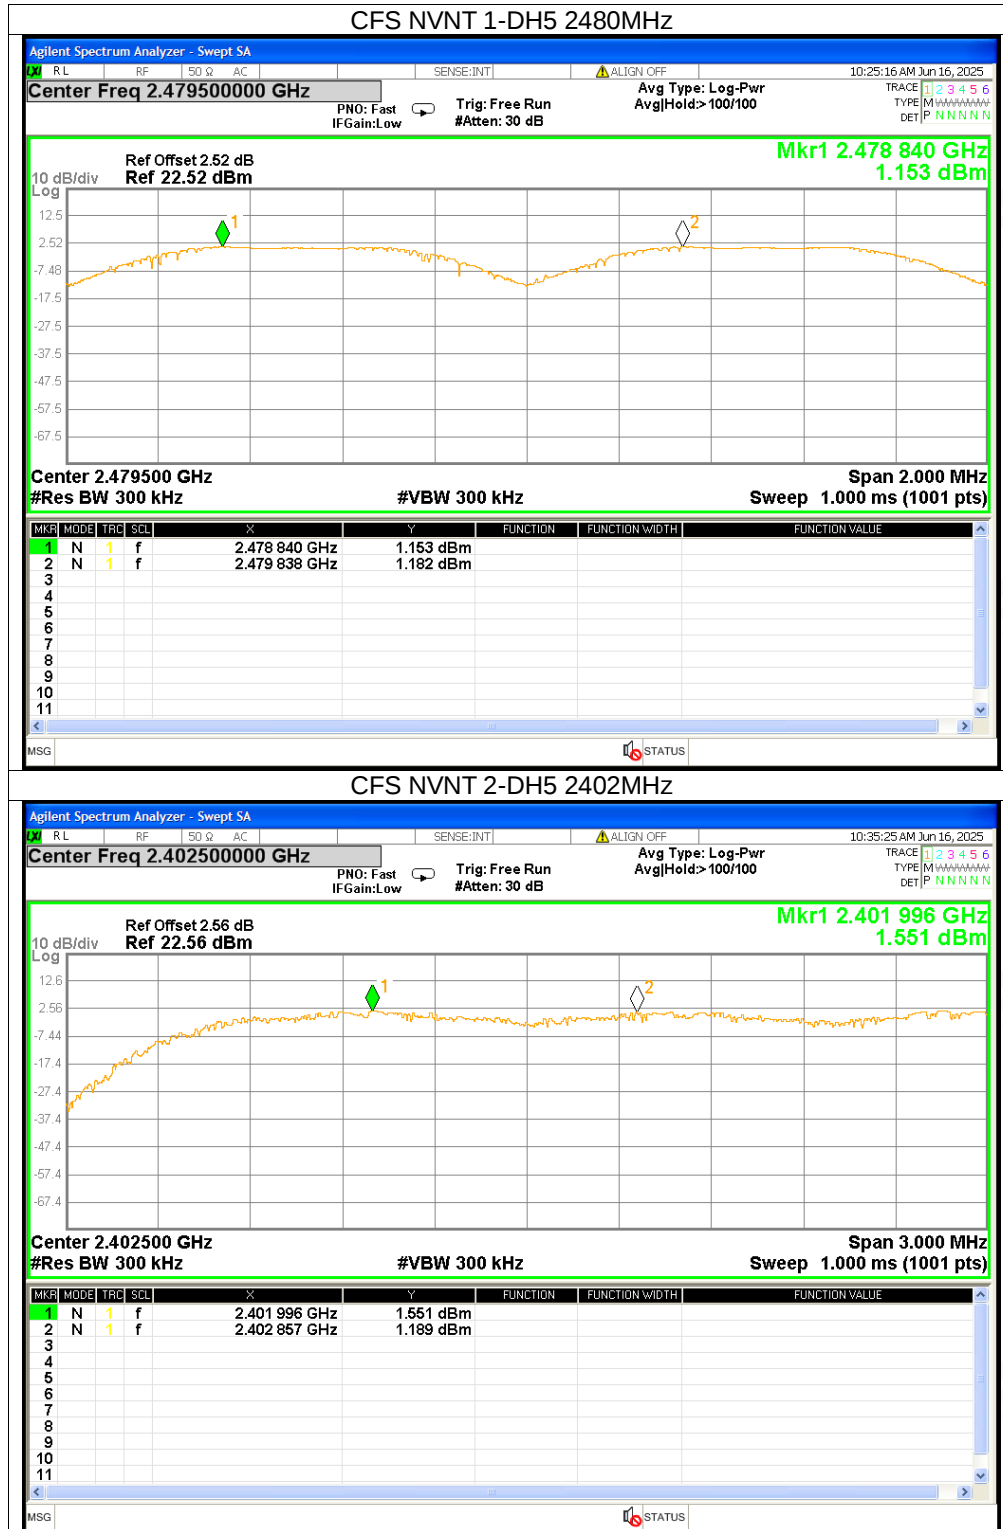


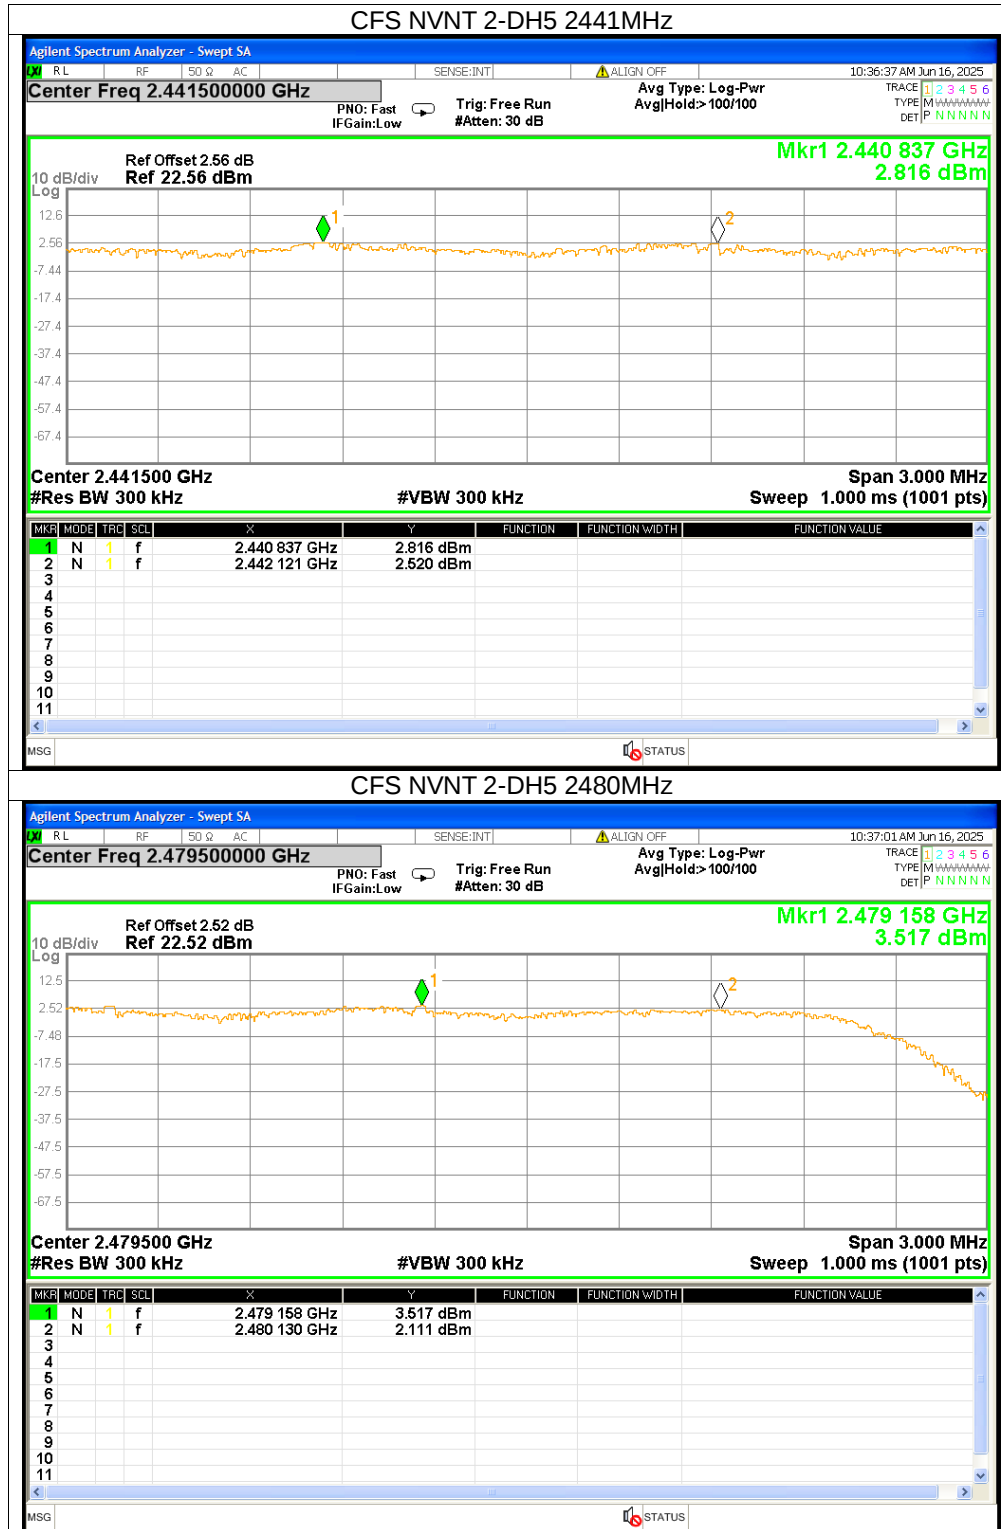



Number of Hopping Channel


Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH5	79	≥ 15	Pass
NVNT	2-DH5	79	≥ 15	Pass

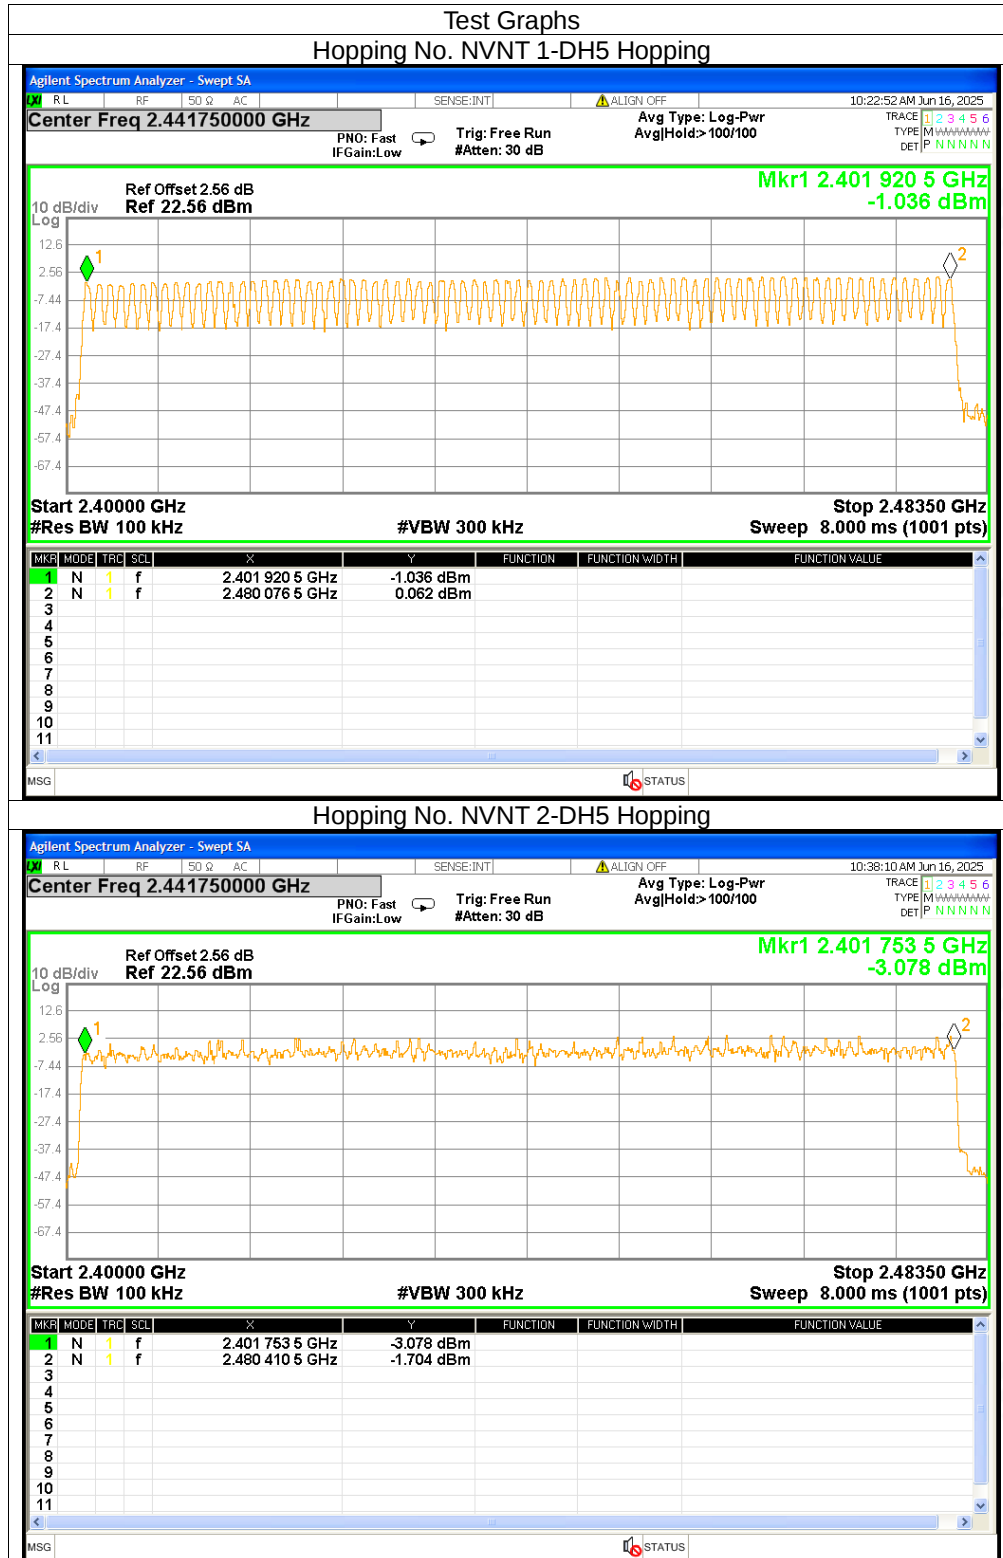






Band Edge

Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	No-Hopping	-43.01	≤ -20	Pass
NVNT	1-DH5	2480	No-Hopping	-45.6	≤ -20	Pass
NVNT	2-DH5	2402	No-Hopping	-46.32	≤ -20	Pass
NVNT	2-DH5	2480	No-Hopping	-51.48	≤ -20	Pass

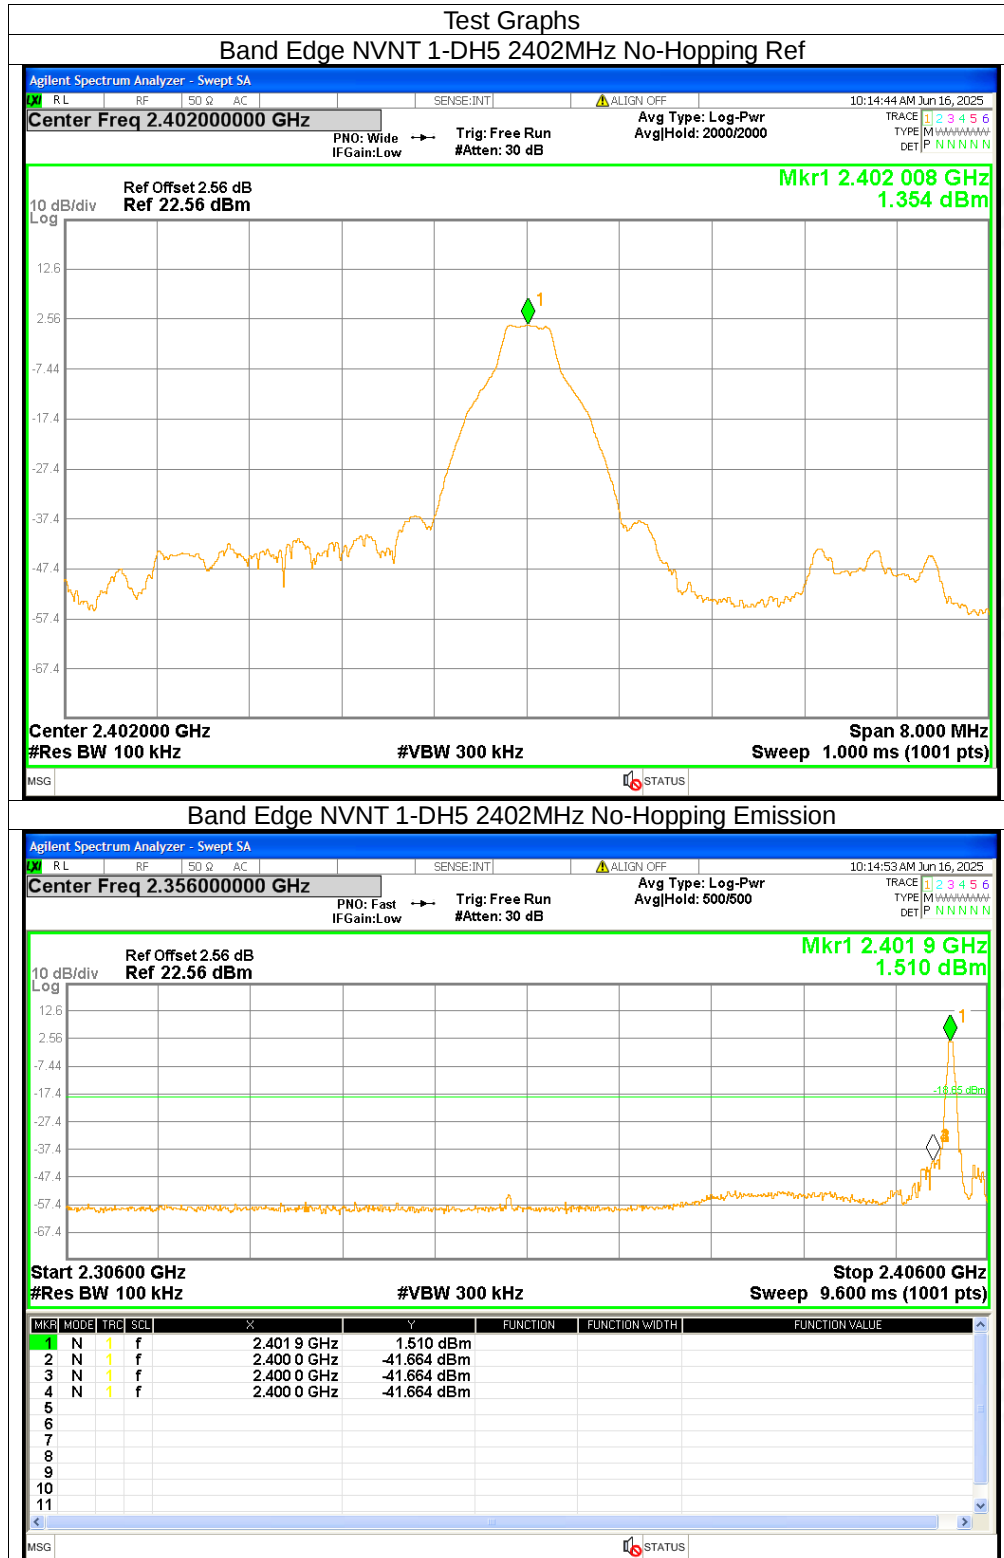

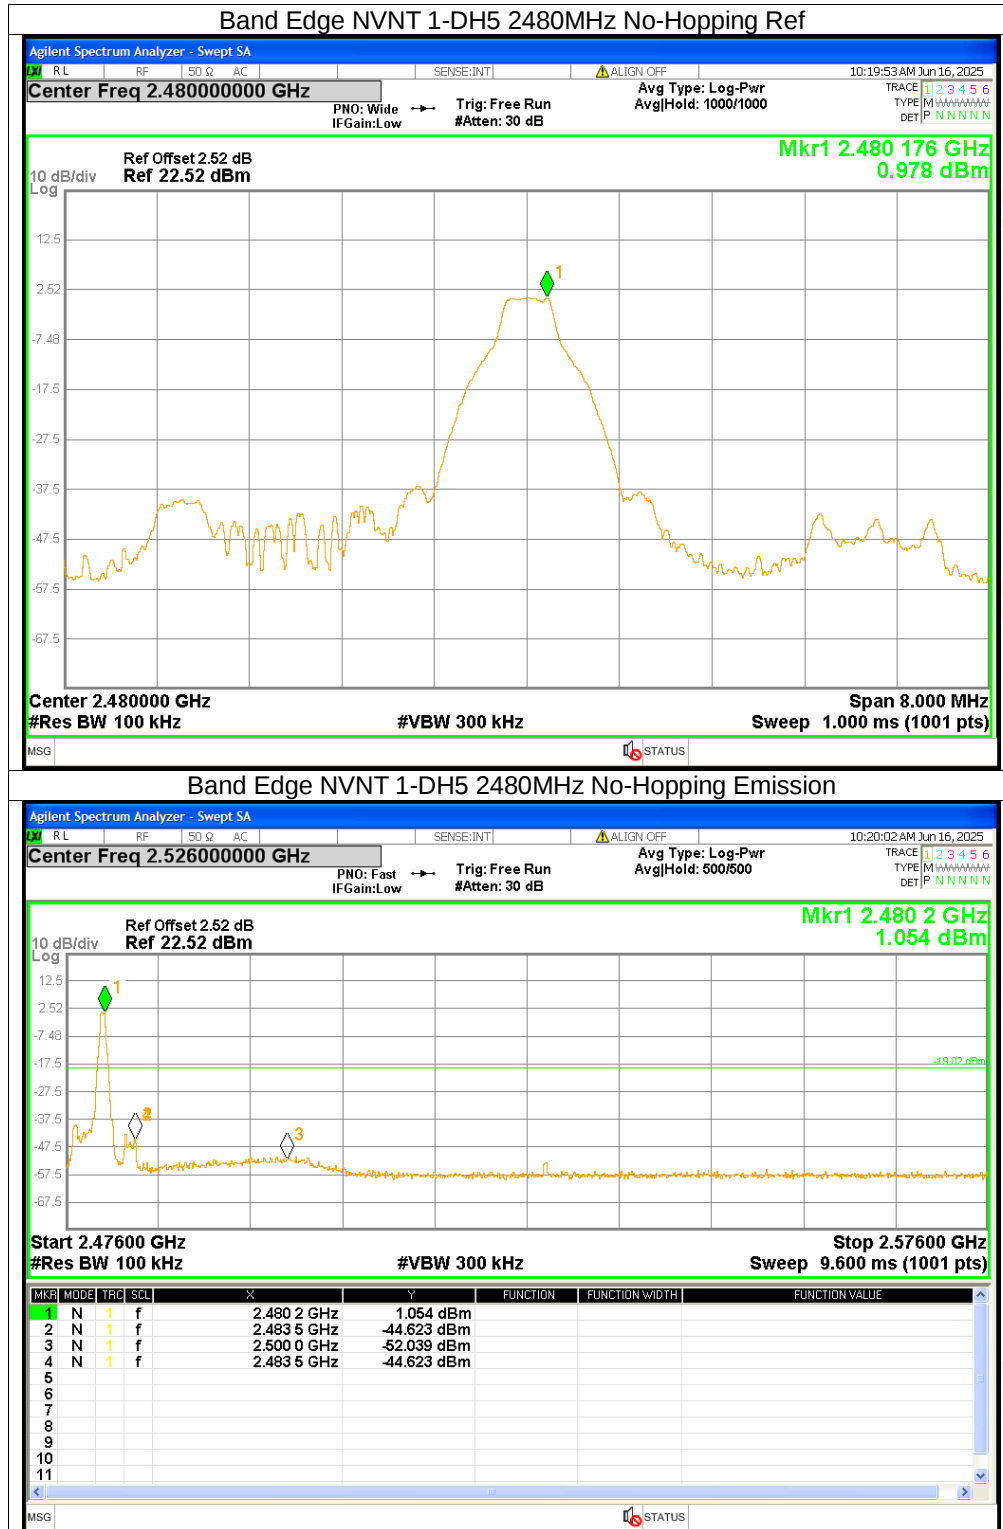

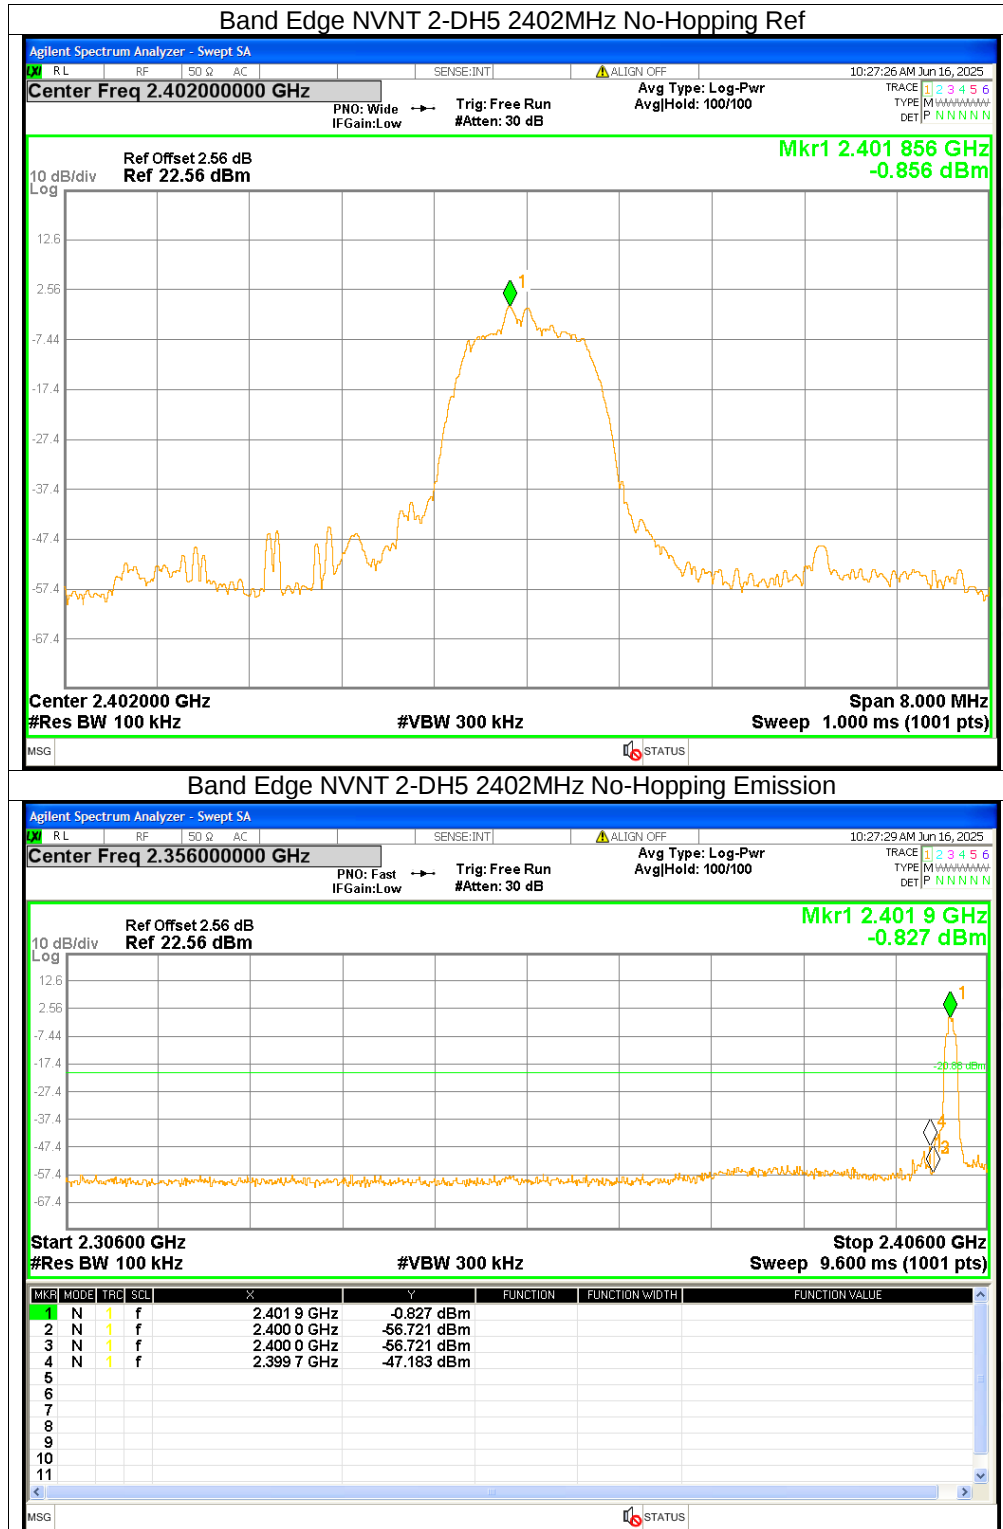


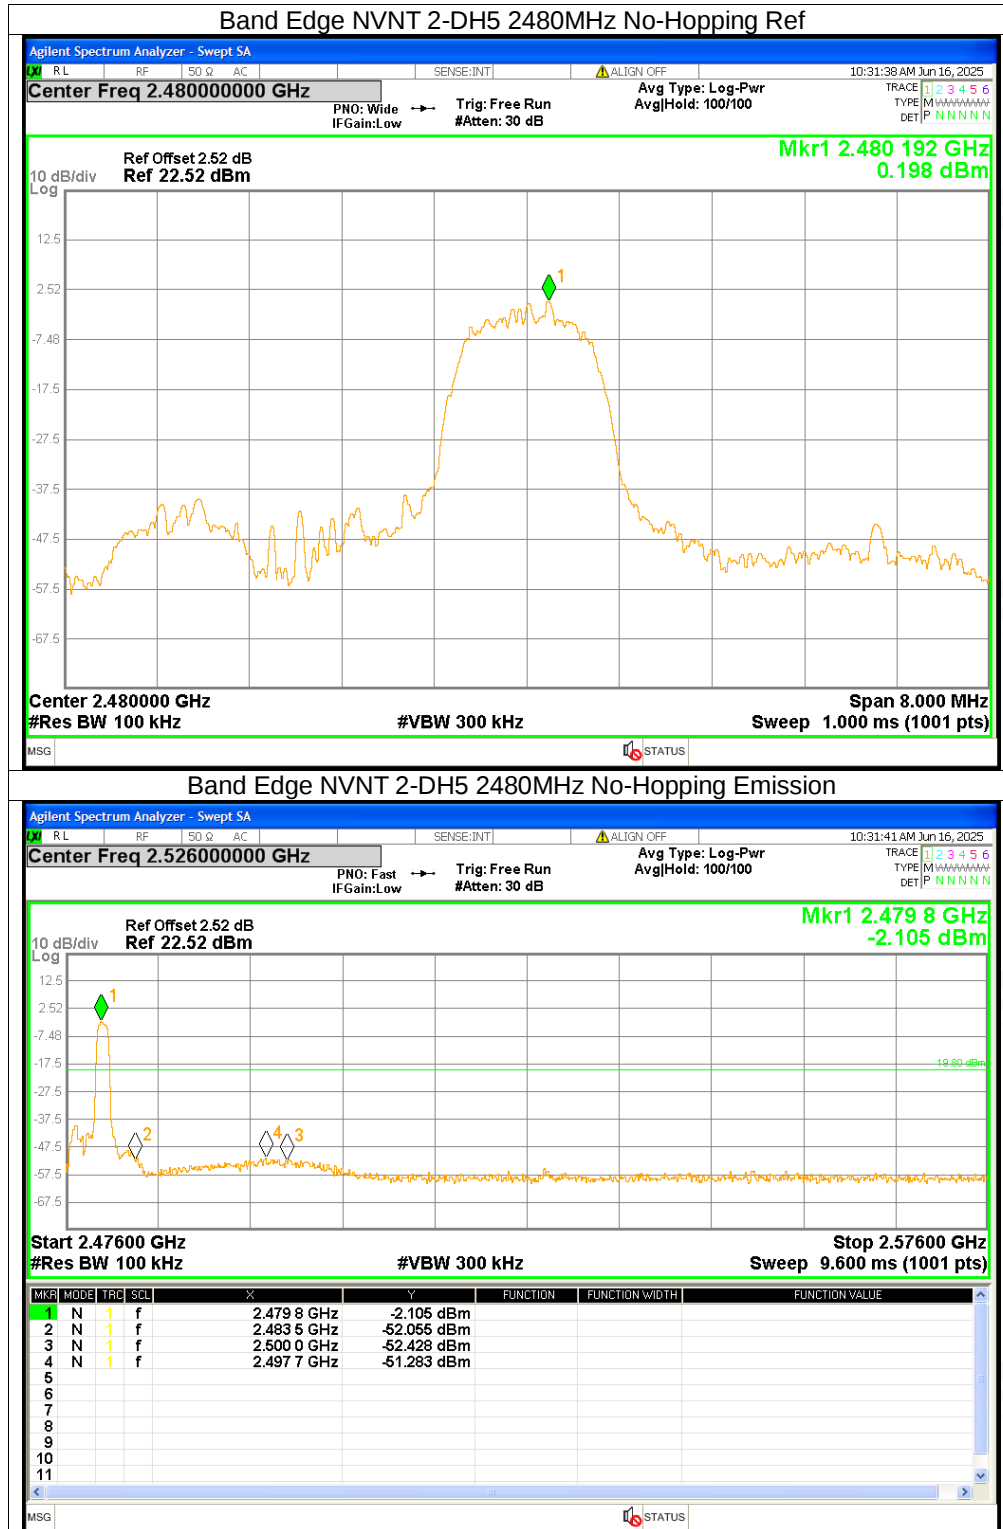





Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Hopping	-52.48	<=-20	Pass
NVNT	1-DH5	2480	Hopping	-48.83	<=-20	Pass
NVNT	2-DH5	2402	Hopping	-52.48	<=-20	Pass
NVNT	2-DH5	2480	Hopping	-50.99	<=-20	Pass

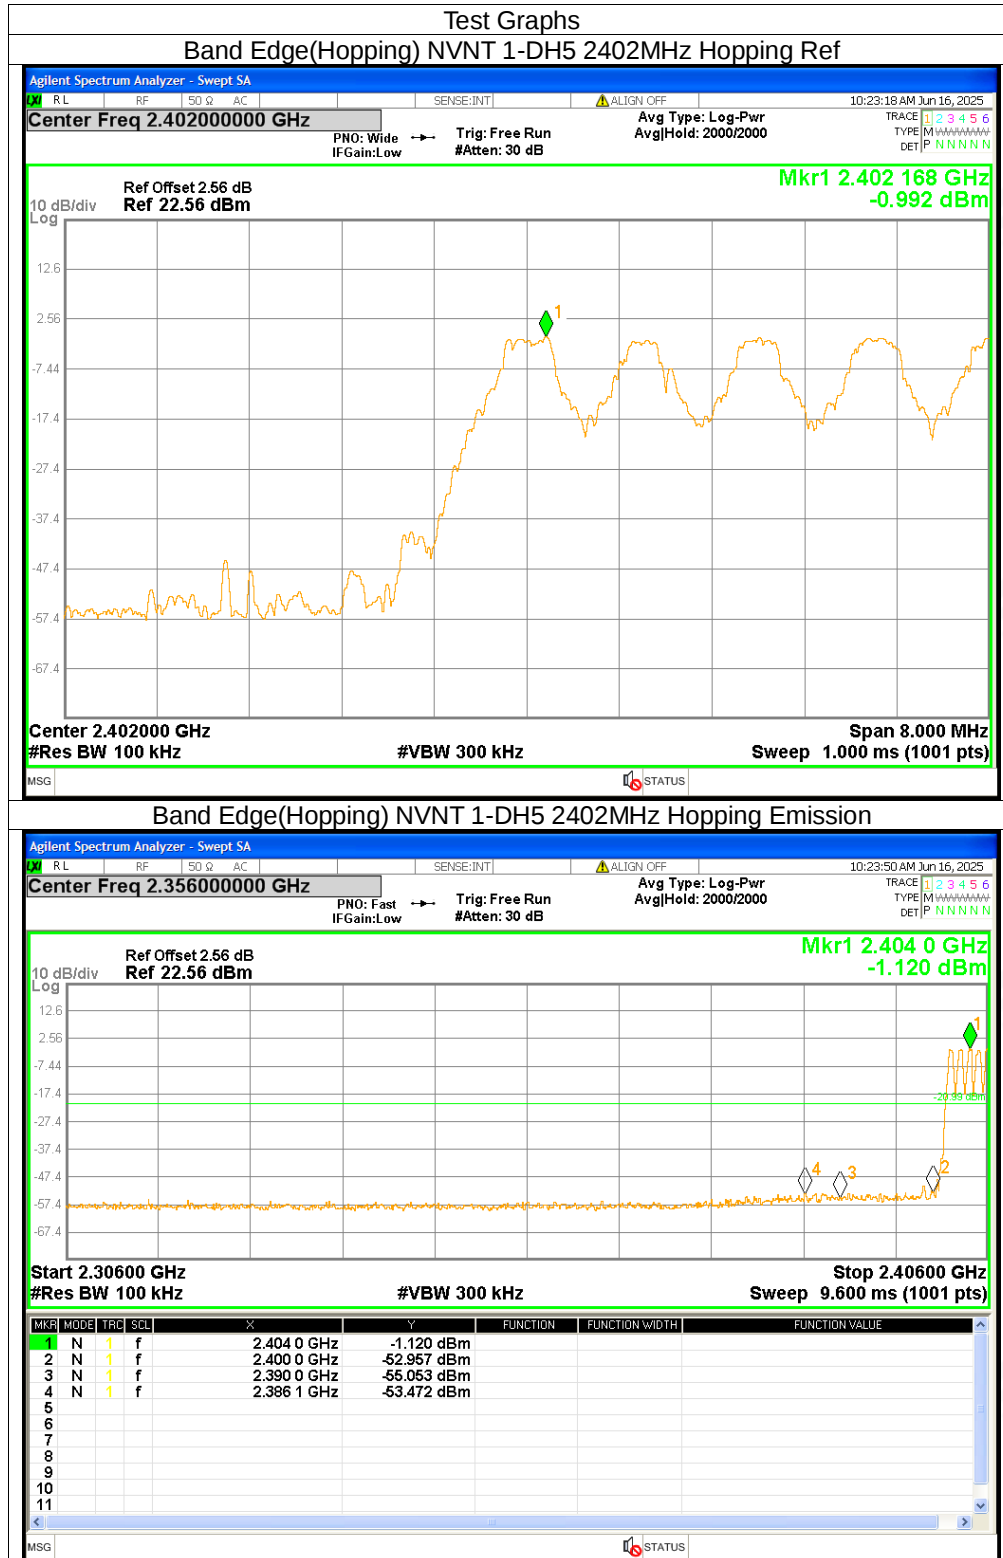



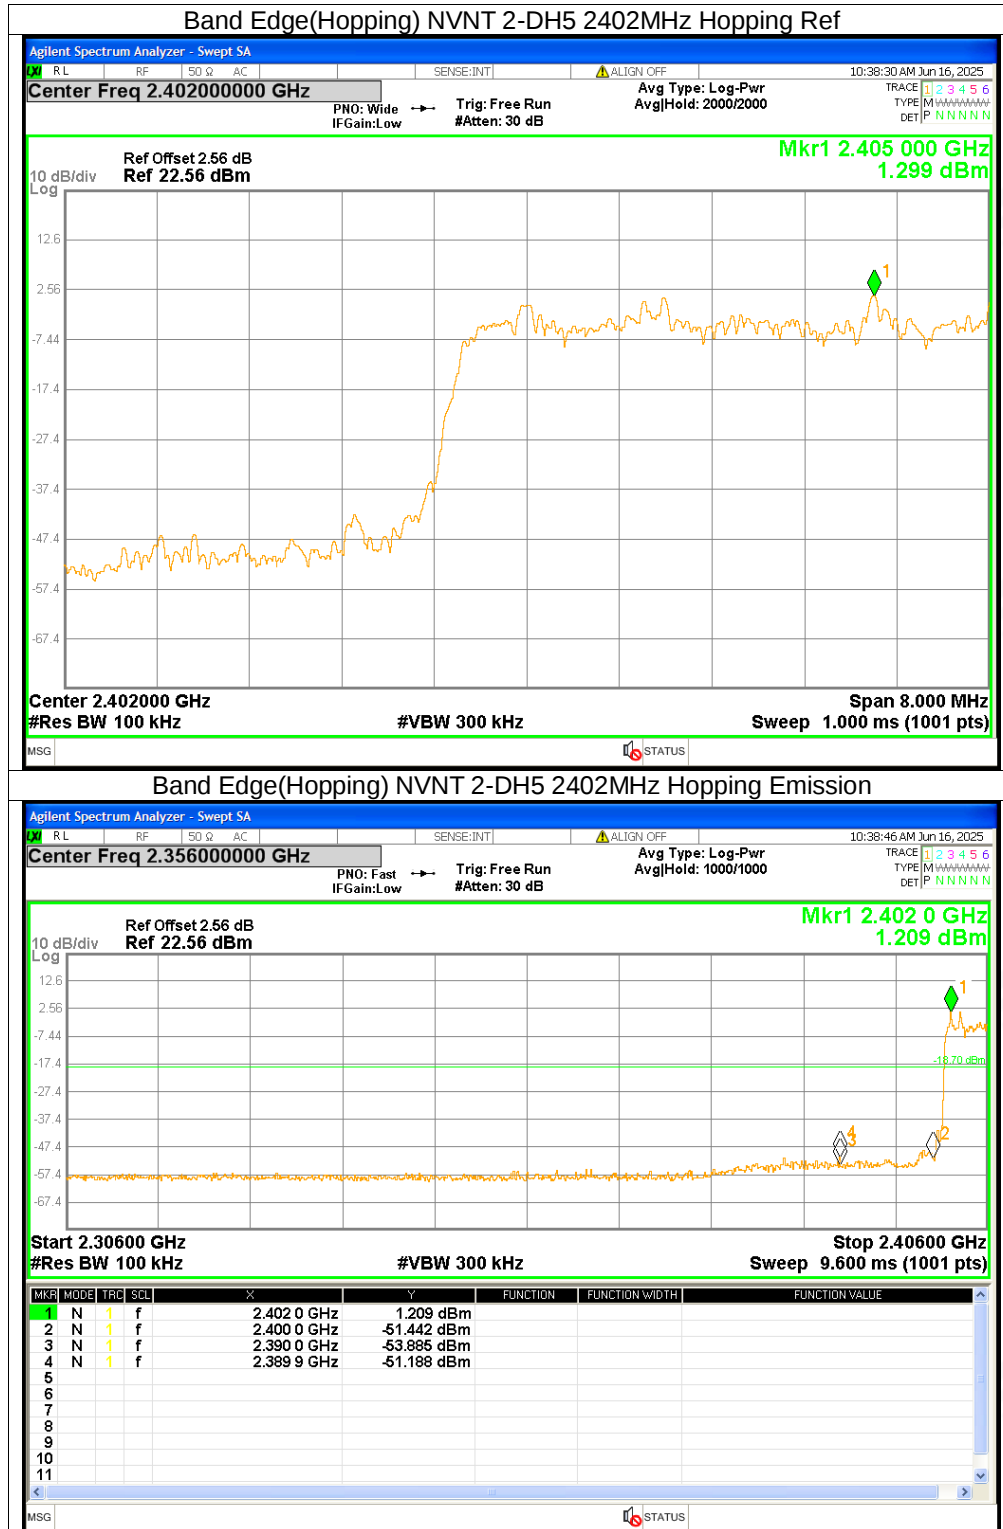


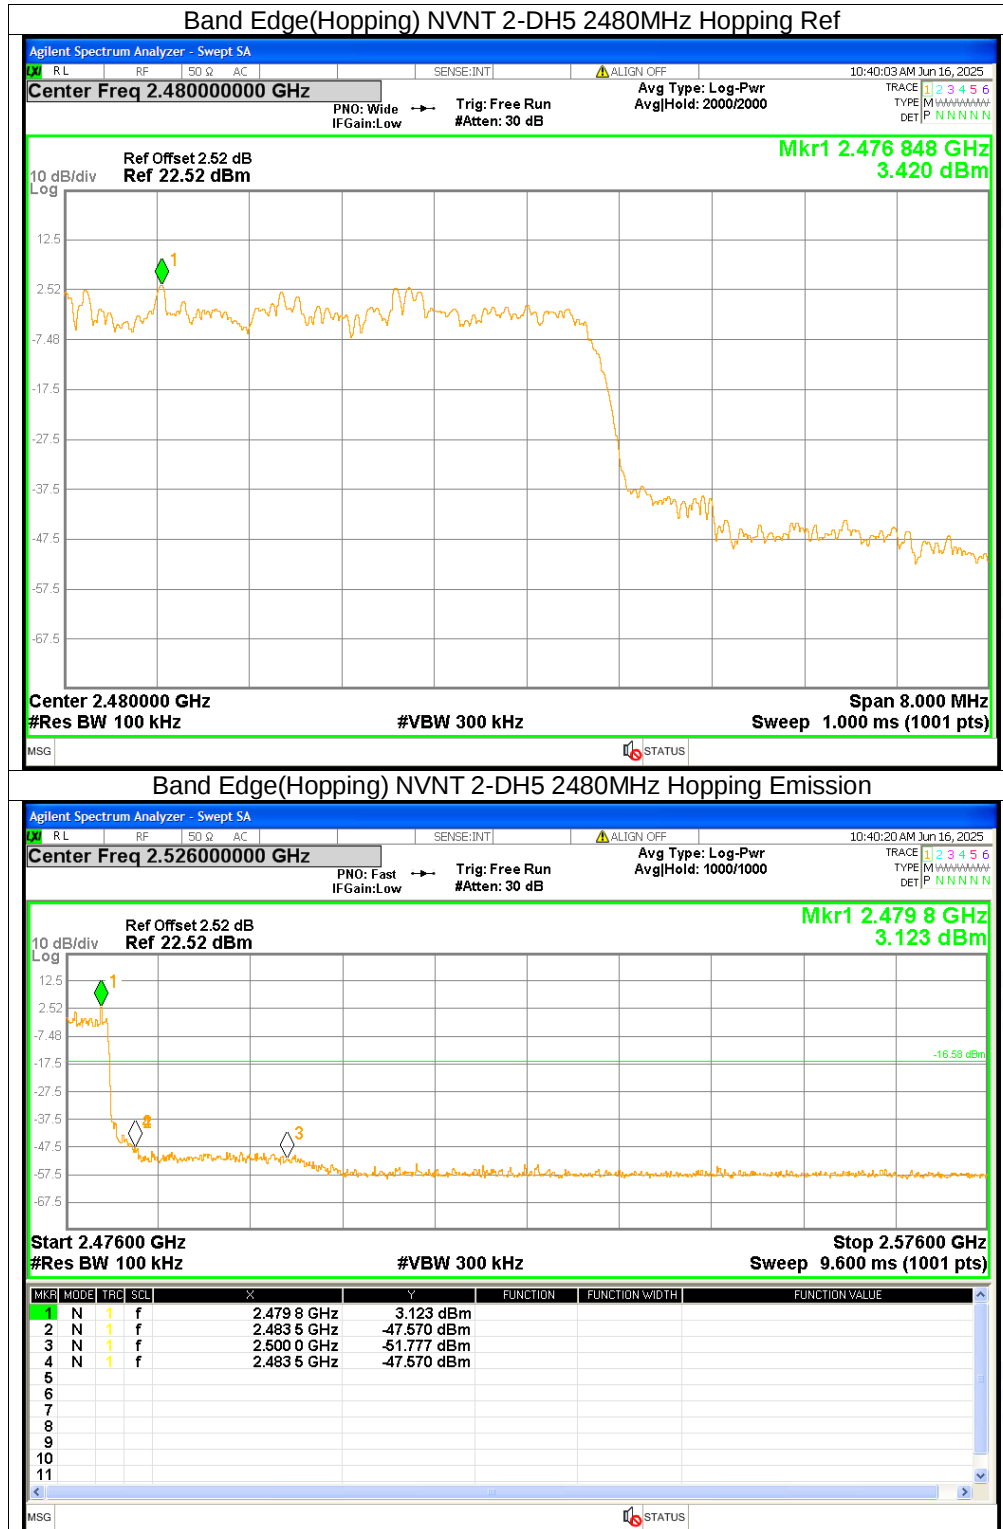






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	-47.9	<=-20	Pass
NVNT	1-DH5	2441	-46.46	<=-20	Pass
NVNT	1-DH5	2480	-46.65	<=-20	Pass
NVNT	2-DH5	2402	-45.66	<=-20	Pass
NVNT	2-DH5	2441	-43.12	<=-20	Pass
NVNT	2-DH5	2480	-47.59	<=-20	Pass

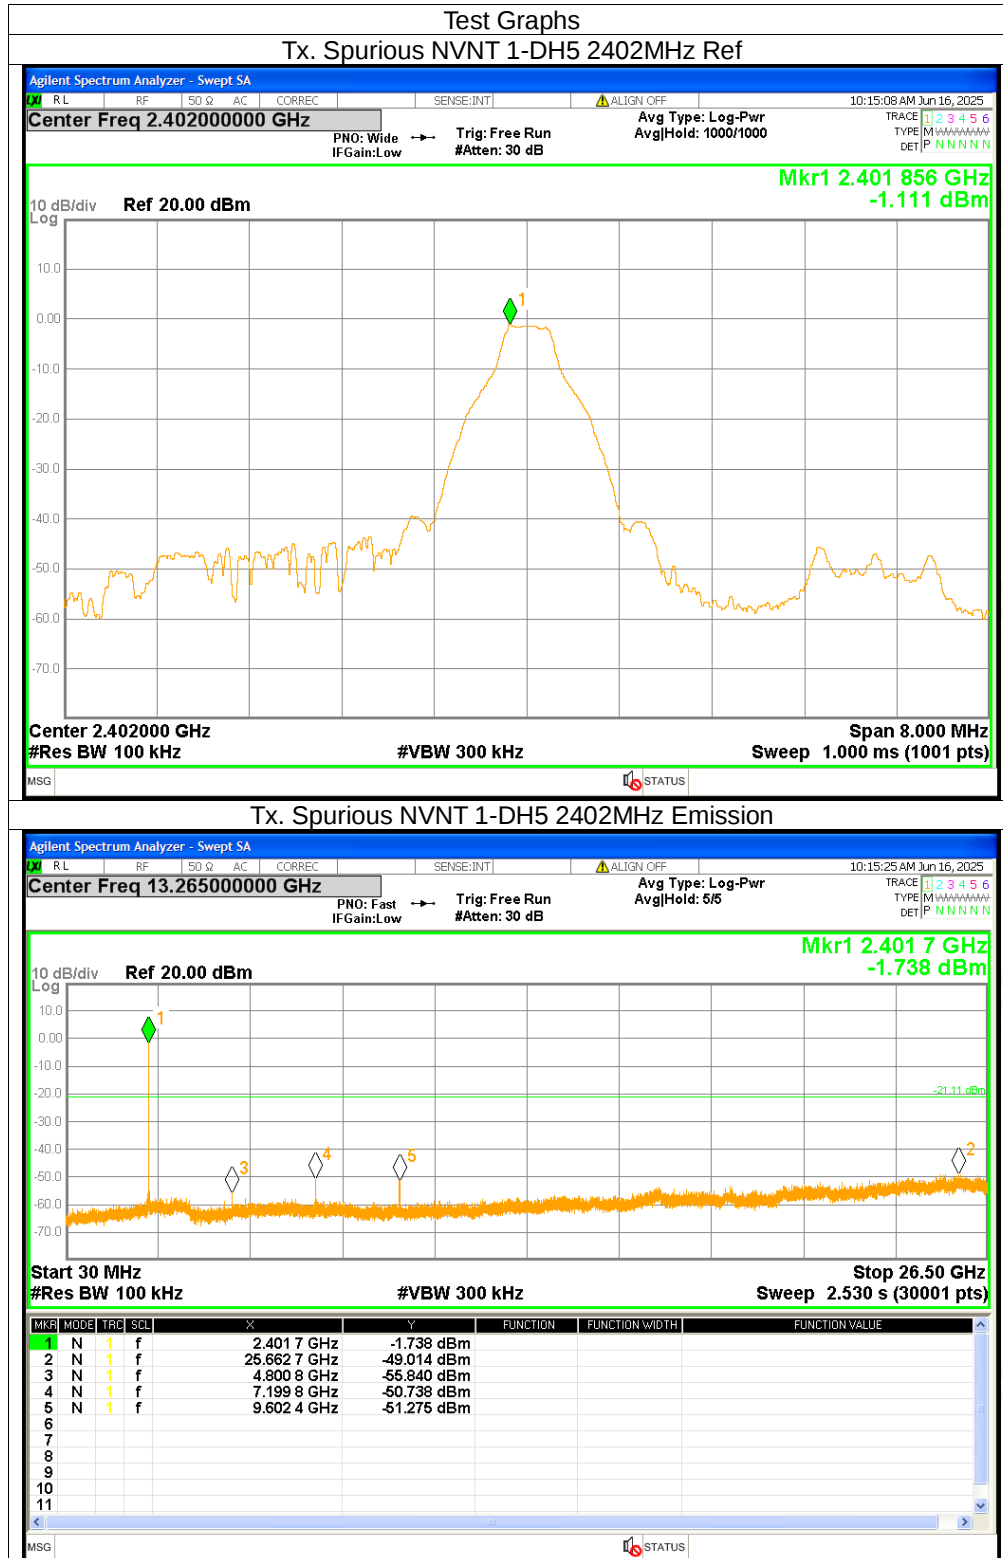


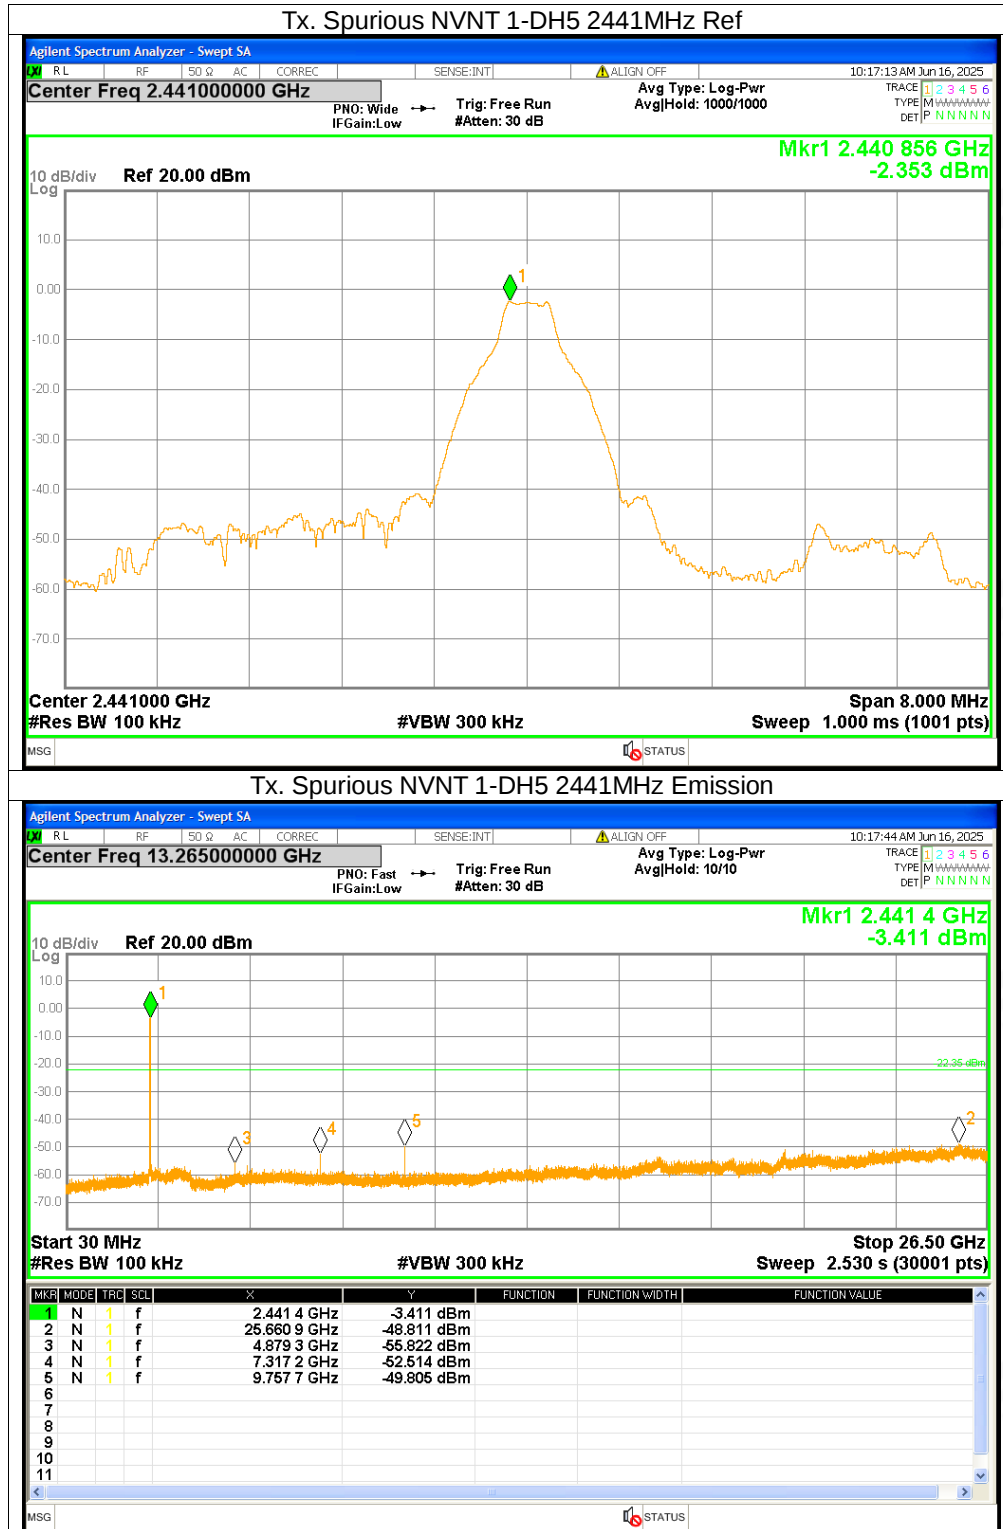

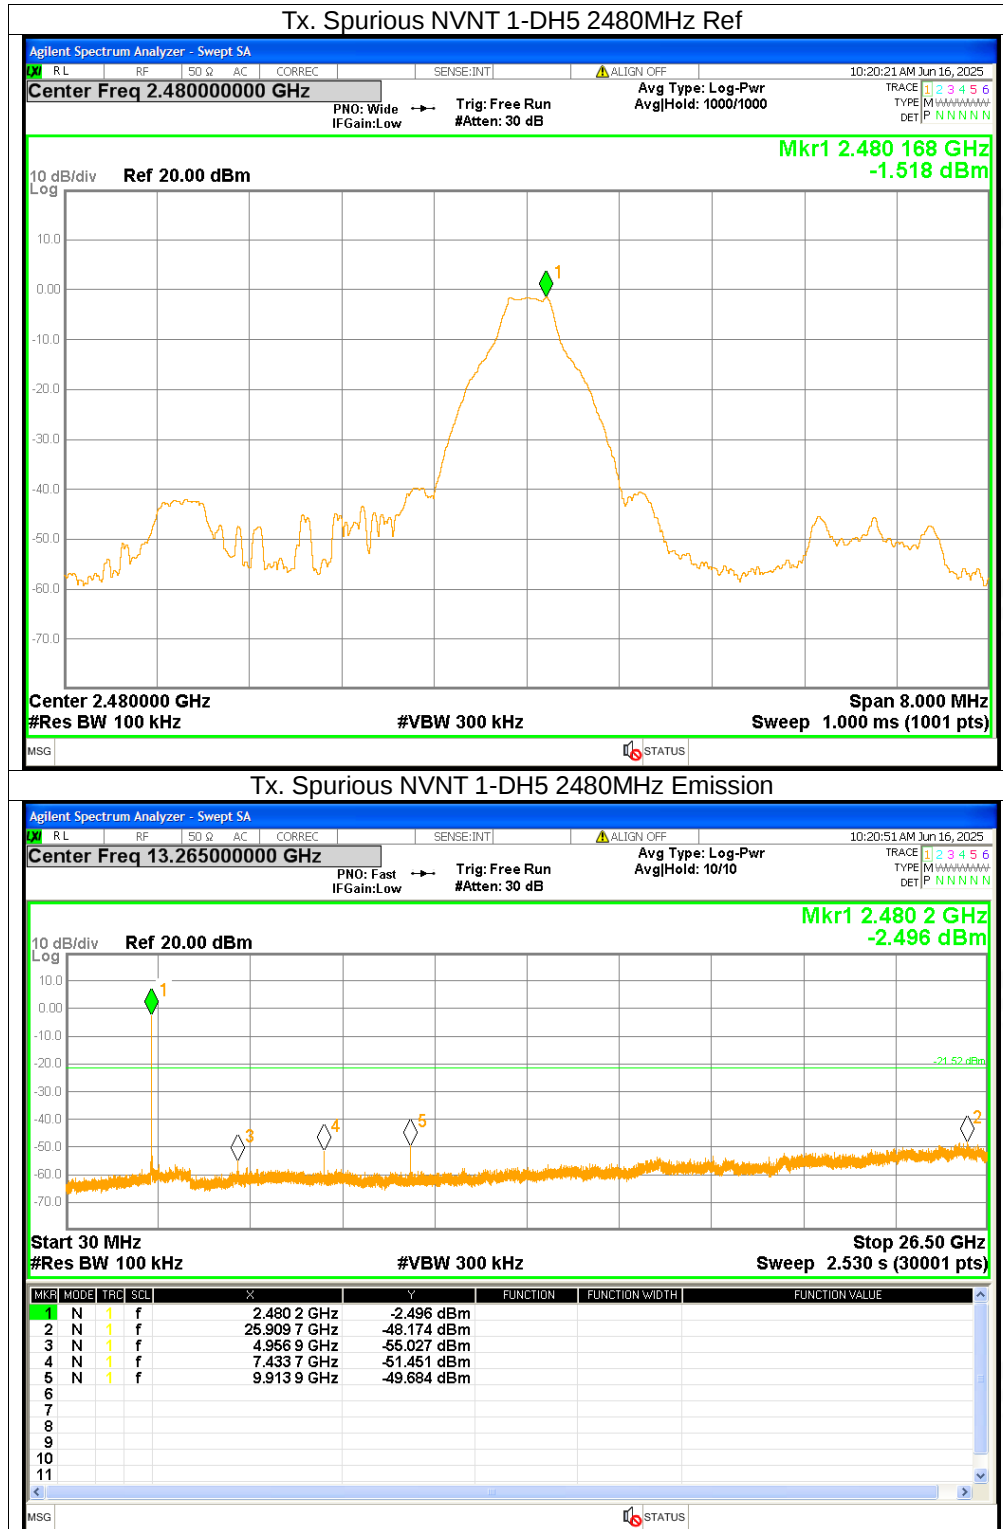

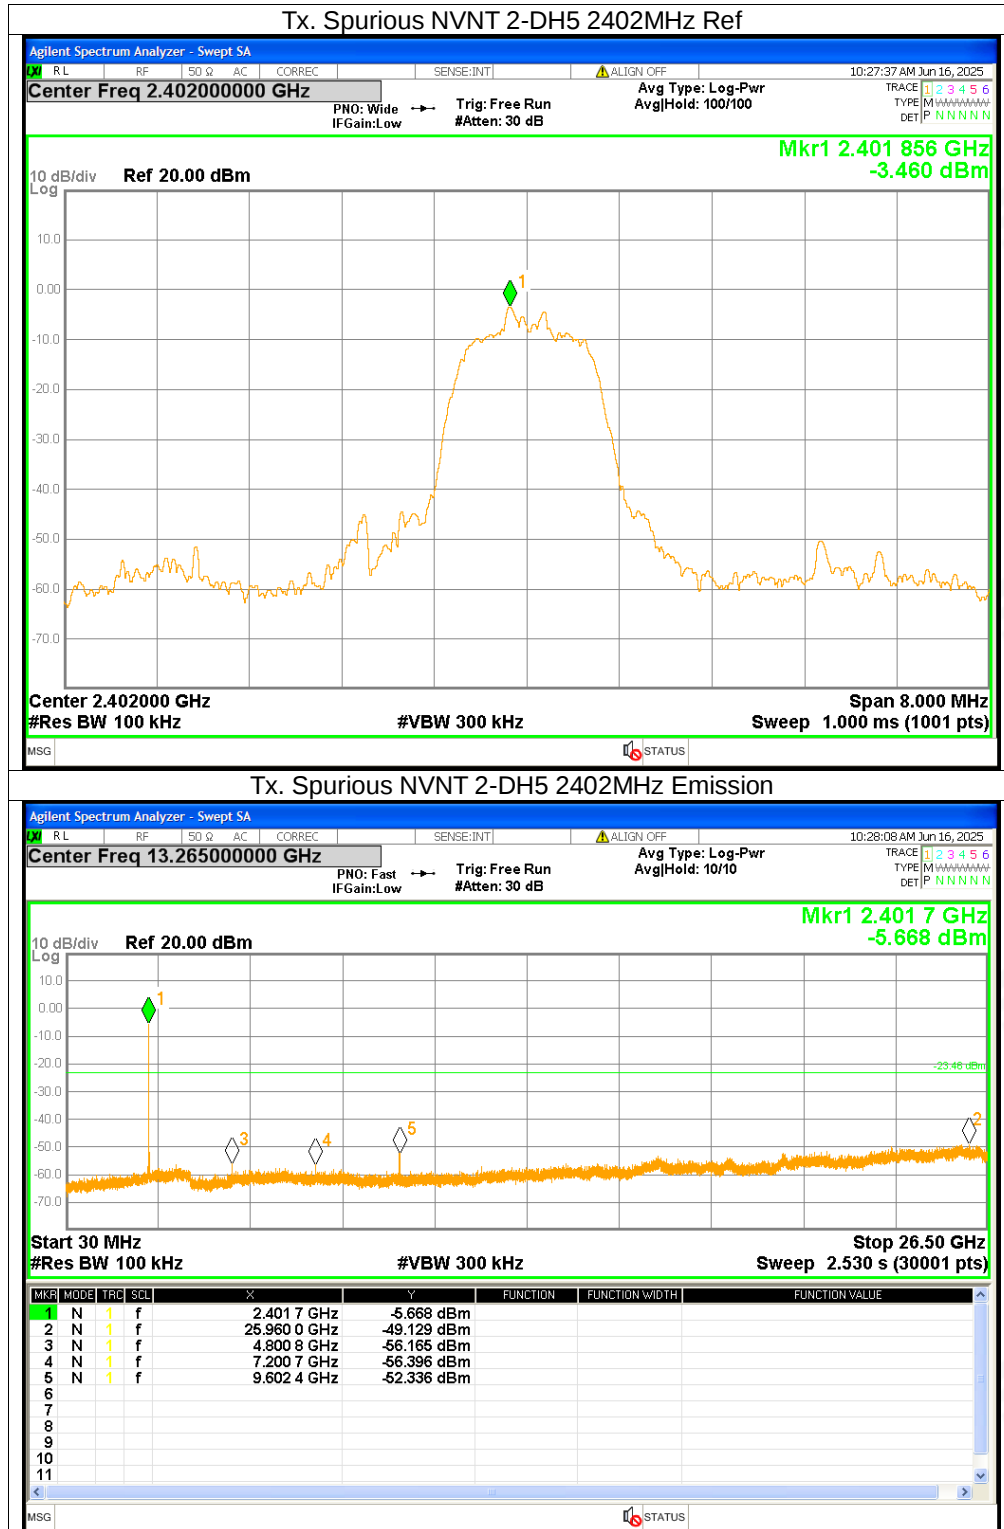

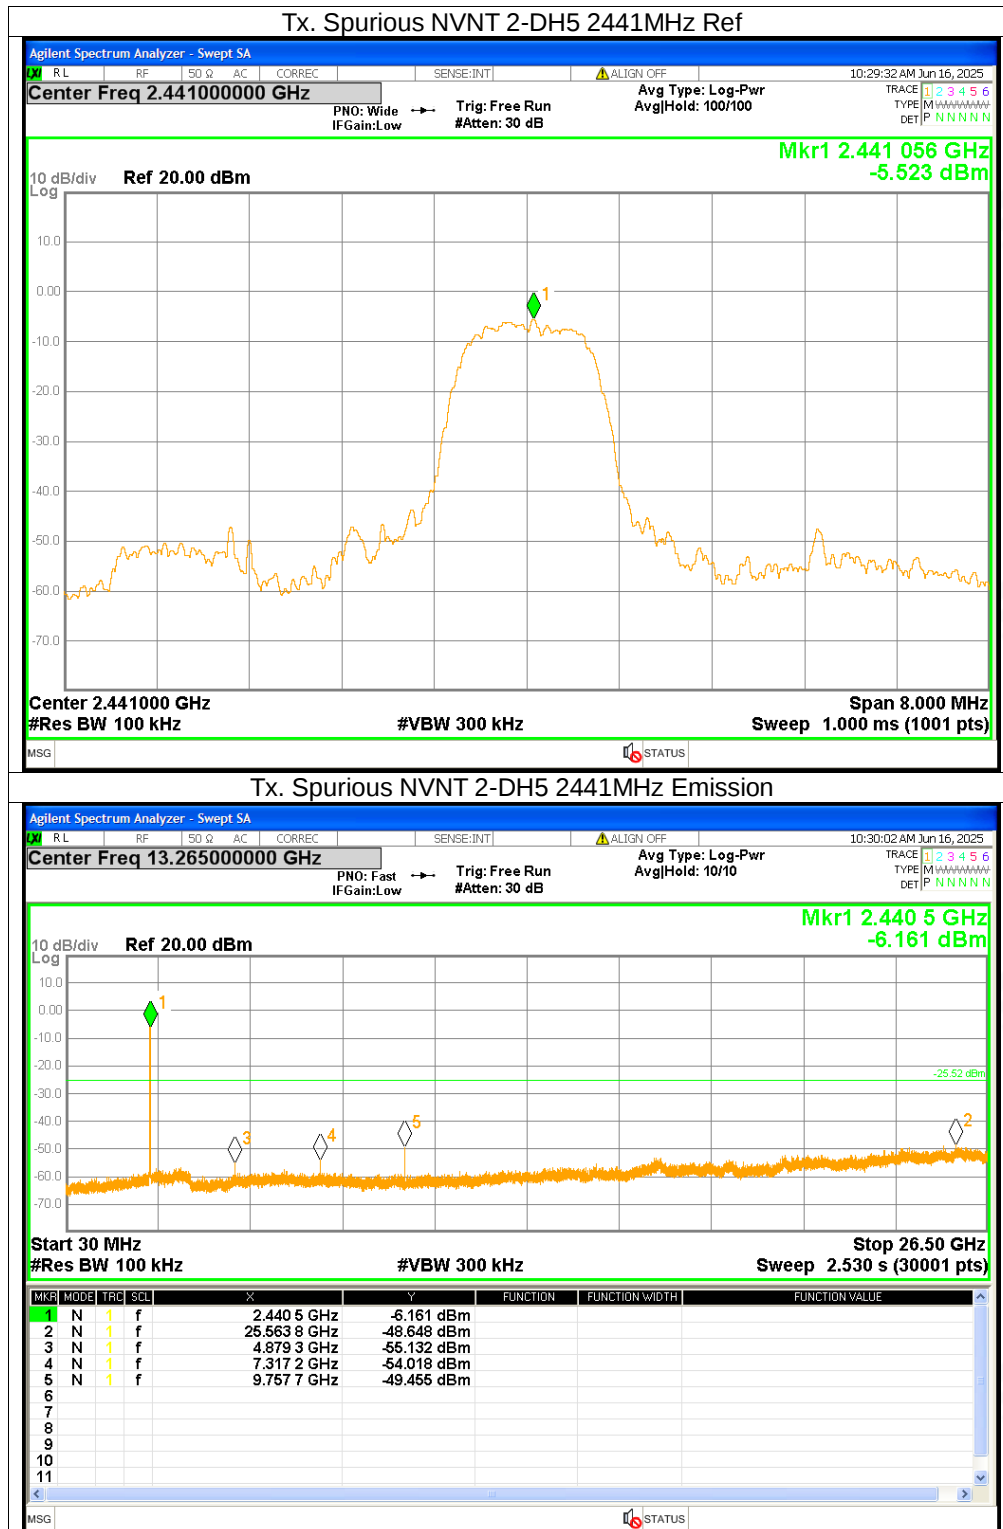

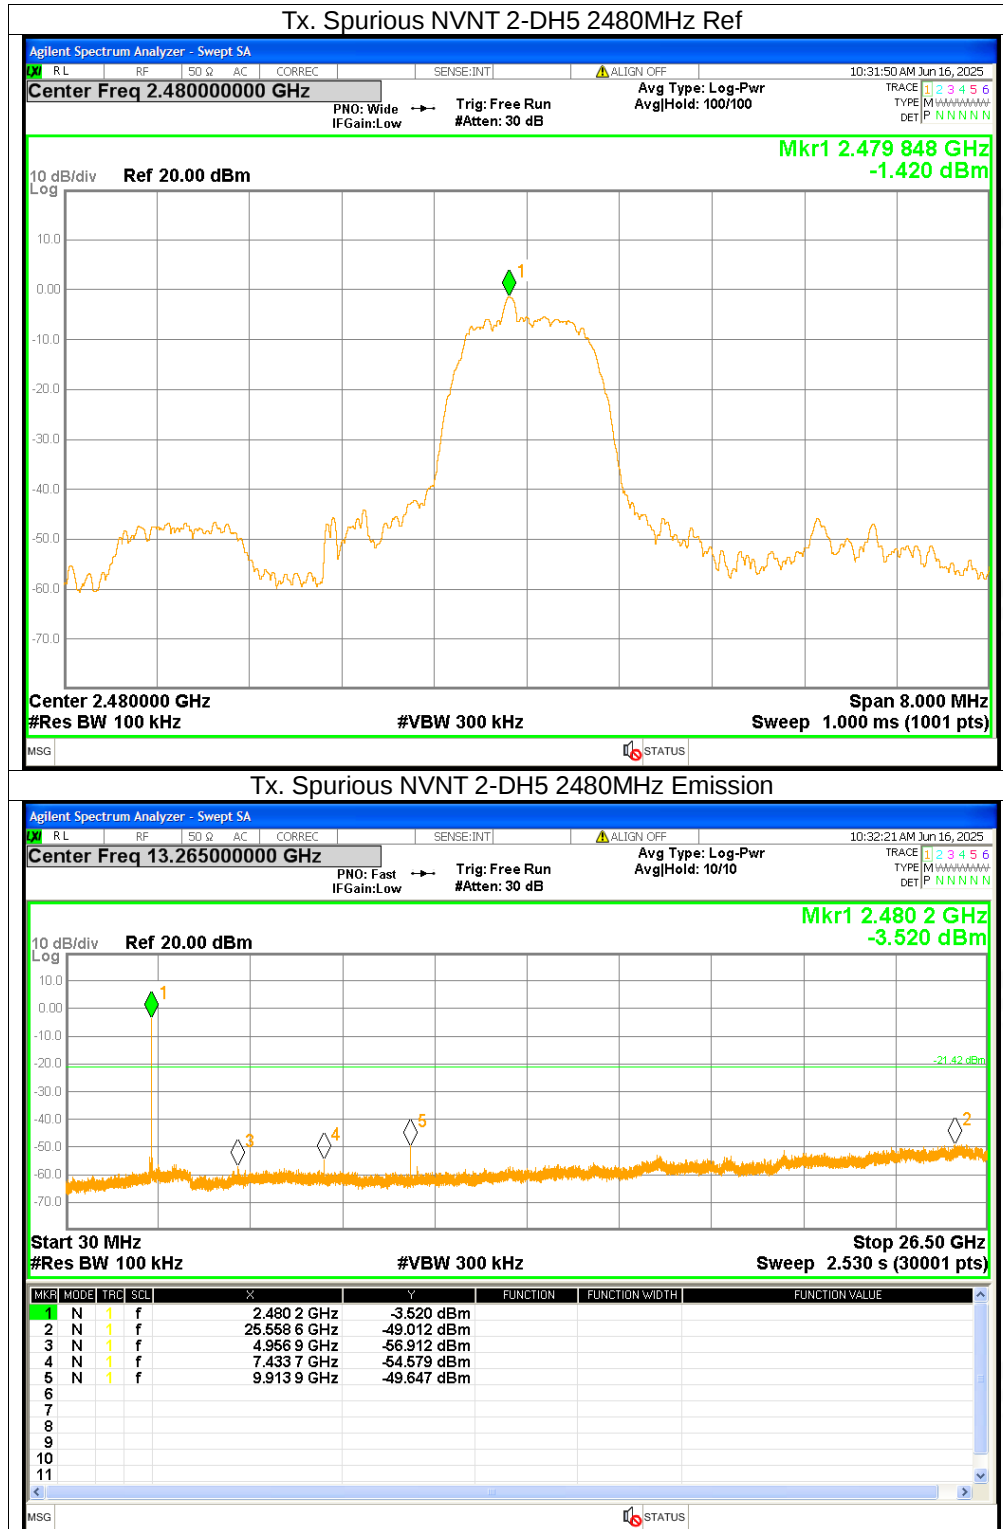



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※