

**WBT STANDARD LABEL
(NEC & CEC 277 – 480VAC)**

COOLON | WOMBAT LED Luminaire

WBT-UL-B0-L-75-WWT-NARROW-RGBW-B-C ☐ 20 ☐ 25

INPUT VOLTAGE 277 ~ 480VAC 50/60Hz

POWER XXXW

DATE CODE 629WBT2503

P ☐ 25 ☐ 30

W ☐ 3/4 ☐ 1

S ☐ 5/4 ☐ 1

L ☐ 3/2 ☐ 1

Rated Power	Ambient Temp	T-Code CI D2	CI II D1&D2 CIII
30W / 50W	-40°C to +65°C	T5	T5
75W	-40°C to +70°C		
100W	-40°C to +55°C		
120W / 150W	-40°C to +50°C		
180W / 200W	-40°C to +45°C		
240W	-40°C to +40°C		

CL.I DIV.2 GRP. A,B,C,D

CL.II DIV.1 GRP. E,F,G

CL.II DIV.2 GRP. F,G

CL.III NEMA 4X IP66

Suitable for Wet Locations

Suitable for Marine Locations

Simultaneous Presence

Class I, Zone 2, Group IIC

Zone 20 and Zone 21

Zone 22

c US

XXXXXX

CAN ICES-005 (B)

TMD-005 (B)

FCC ID: 289G8-WOMBATE29B

IC: 33856-WOMBATE29B

CAUTION: To reduce the risk of ignition of hazardous atmospheres, disconnect the luminaire from the supply circuit before opening. Keep tightly closed when in operation. Electrostatic charging hazard - clean only with a damp cloth. Do not open when energized or explosive atmosphere is present. Use listed resistant cables and glands (rated 90°C).

ATTENTION: Pour réduire le risque d'inflammation d'atmosphères dangereuses, débranchez le luminaire du circuit d'alimentation avant de l'ouvrir. Garder hermétiquement fermé lors de l'utilisation. Risque de charge électrostatique: nettoyer uniquement avec un chiffon humide. Ne pas ouvrir sous tension ou en présence d'une atmosphère explosive. Utiliser des câbles et presse-étoupes résistants à la chaleur (90°C).

WOMBAT LED Luminaire				12-14 AUSTRAL PLANCE, HALLAM, 3803 VIC, AU	MADE IN CHINA
WBT-UL-B0-L100-WWT-NARROW-RGBW-B-C				CL.I DIV.2 GRP. A, B, C, D	Class 1, Zone 2, Group IIC
INPUT VOLTAGE 277 – 480VAC 50/60Hz				CL.II DIV.1 GRP. E, F, G	Zone 20 and Zone 21
POWER XXXW				CL.II DIV.2 GRP. F, G	Zone 22
DATE CODE 629WBT2503				CL.III NEMA 4X IP66	
				Suitable for Wet Locations	
				Suitable for Marine Locations	
				Simultaneous Presence	

Rated Power	Ambient Temp	T-Code Cl I/2	T-Code Cl II & III
30W / 50W	-40°C to +65°C	T5	T5
75W	-40°C to +70°C		
100W	-40°C to +55°C		
120W / 150W	-40°C to +50°C		
180W / 200W	-40°C to +45°C		
240W	-40°C to +40°C		

☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2

CL.I DIV.2 GRP. A, B, C, D	Class 1, Zone 2, Group IIC
CL.II DIV.1 GRP. E, F, G	Zone 20 and Zone 21
CL.II DIV.2 GRP. F, G	Zone 22
CL.III NEMA 4X IP66	
Suitable for Wet Locations	
Suitable for Marine Locations	
Simultaneous Presence	

☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2

CL.I DIV.2 GRP. A, B, C, D	Class 1, Zone 2, Group IIC
CL.II DIV.1 GRP. E, F, G	Zone 20 and Zone 21
CL.II DIV.2 GRP. F, G	Zone 22
CL.III NEMA 4X IP66	
Suitable for Wet Locations	
Suitable for Marine Locations	
Simultaneous Presence	

☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2

CL.I DIV.2 GRP. A, B, C, D	Class 1, Zone 2, Group IIC
CL.II DIV.1 GRP. E, F, G	Zone 20 and Zone 21
CL.II DIV.2 GRP. F, G	Zone 22
CL.III NEMA 4X IP66	
Suitable for Wet Locations	
Suitable for Marine Locations	
Simultaneous Presence	

☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2
☐ 20	☐ 25	☐ 3/4	☐ 1	☐ 5/4	☐ 3/2

CL.I DIV.2 GRP. A, B, C, D	Class 1, Zone 2, Group IIC
CL.II DIV.1 GRP. E, F, G	Zone 20 and Zone 21
CL.II DIV.2 GRP. F, G	Zone 22
CL.III NEMA 4X IP66	
Suitable for Wet Locations	
Suitable for Marine Locations	
Simultaneous Presence	

COOLON | WOMBAT LED Luminaire

WBT-UL-B0-L-150-WWT-NARROW-RGBW-B-C ☐ 20 ☐ 25 ☐ 30

INPUT VOLTAGE..... 277 ~ 480VAC 50/60Hz

POWER..... XXXW

DATE CODE..... 629WBT503

12-14 AUSTRAL PLACE, HALLAM, 3803 VIC, AU MADE IN XXXX

Class I, Zone 2, Group IIC Zone 20 and Zone 21 Zone 22 CL.I DIV.2 GRP. A,B,C,D CL.II DIV.1 GRP. F,G CL.II DIV.2 GRP. F,G CL.III NEMA 4X IP66 Suitable for Wet Locations Suitable for Marine Locations Simultaneous Presence	  	  
---	---	---

Rated Power	Ambient Temp	T-CODE CI D2	T-CODE CI1 D1&D2 CI11
30W / 50W	-40°C to +65°C	TS	TS
75W	-40°C to +70°C		
100W	-40°C to +55°C		
120W / 150W	-40°C to +50°C		
180W / 200W	-40°C to +45°C		
240W	-40°C to +40°C		

CAUTION: To reduce the risk of ignition of hazardous atmospheres, disconnect the luminaire from the supply circuit before opening. Keep tightly closed when in operation. Electrostatic charging hazard - clean only with a damp cloth. Do not open when energized or on explosive atmosphere is present. Use heat resistant cables and glands (rated to 100°C).


ATTENTION: Pour réduire le risque d'inflammation d'atmosphères dangereuses, débrancher le luminaire du circuit d'alimentation avant de l'ouvrir. Garder hermétiquement fermé lors de l'utilisation. Risque de charge électrostatique: nettoyer uniquement avec un chiffon humide. Ne pas ouvrir sous tension ou en présence d'une atmosphère explosive. Utiliser des câbles et presse-étouffes résistants à la chaleur (90°C).

COOLON WOMBAT LED Luminaire				12-14 AUSTRAL PLATE, HALLAM, 3803 VIC, AU	MADE IN XXXX
WBT-UL-B0-L-240-WWT-NARROW-RGBW-B-C					
INPUT VOLTAGE	277 – 480VAC 50/60Hz	C	☐ 20	CL.I DIV.2 GRP. A, B, C, D	Class 1, Zone 2, Group IIC
POWER	XXXXW	P	☐ 25	CL.II DIV.1 GRP. E, F, G	Zone 20 and Zone 21
DATE CODE	629WBT2503	W	☐ 3/4	CL.II DIV.2 GRP. F, G	Zone 22
			☐ 1	CL.III NEMA 4X IP66	
		S	☐ 5/4	Suitable for Wet Locations	
		L	☐ 3/2	Suitable for Marine Locations	
				Simultaneous Presence	


PRODUCT DESCRIPTION

WBT - Ex - B0 - L - 30 - NWT - T1S - RGBW - A - C - 20 - TB (example)

- Accessories : WG=Wire guard; TB=Trunnion Bracket
- NOTE: Y refers to mounting option
- Mount Option: C=20; C25; C=3/4; P=20; P=25; P=3/4; P=1; W=20; W=25; W=3/4; W=1; S=5/4; S=3/2; L=5/4; L=3/2
- C=Ceiling; P=Pendant; W=Wall; S=25" Stanchion; L=90" Stanchion
- 20=M20x1.5; 25=M25x1.5; 3/4=3/4" NPT; 1=1" NPT; 5/4=1-1/4" NPT; 3/2=1-1/2" NPT
- Operating voltage: A=100-277Vac, 50/60Hz; B=277-480Vac, 50/60Hz;
- Indicator: RGBW
- Optics: T1=Type I; T3=Type III; T4=Type IV; Medium=60"; Narrow=38"; SY1=Symmetrical Diffused; NOP=Extra Wide
- Colour: NWT=Neutral White; CWT=Cool White; WWT=Warm White; AMB=Amber
- Power: 30=30W; 50=50W; 75=75W; 100=100W; 120=120W; 150=150W; 180=180W; 200=200W; 240=240W
- Body: L = Large Body
- Battery: B0 = No Battery
- Certification: UL = NEC & CEC Standards
- Product Series: WBT = Wombat LED Luminaire

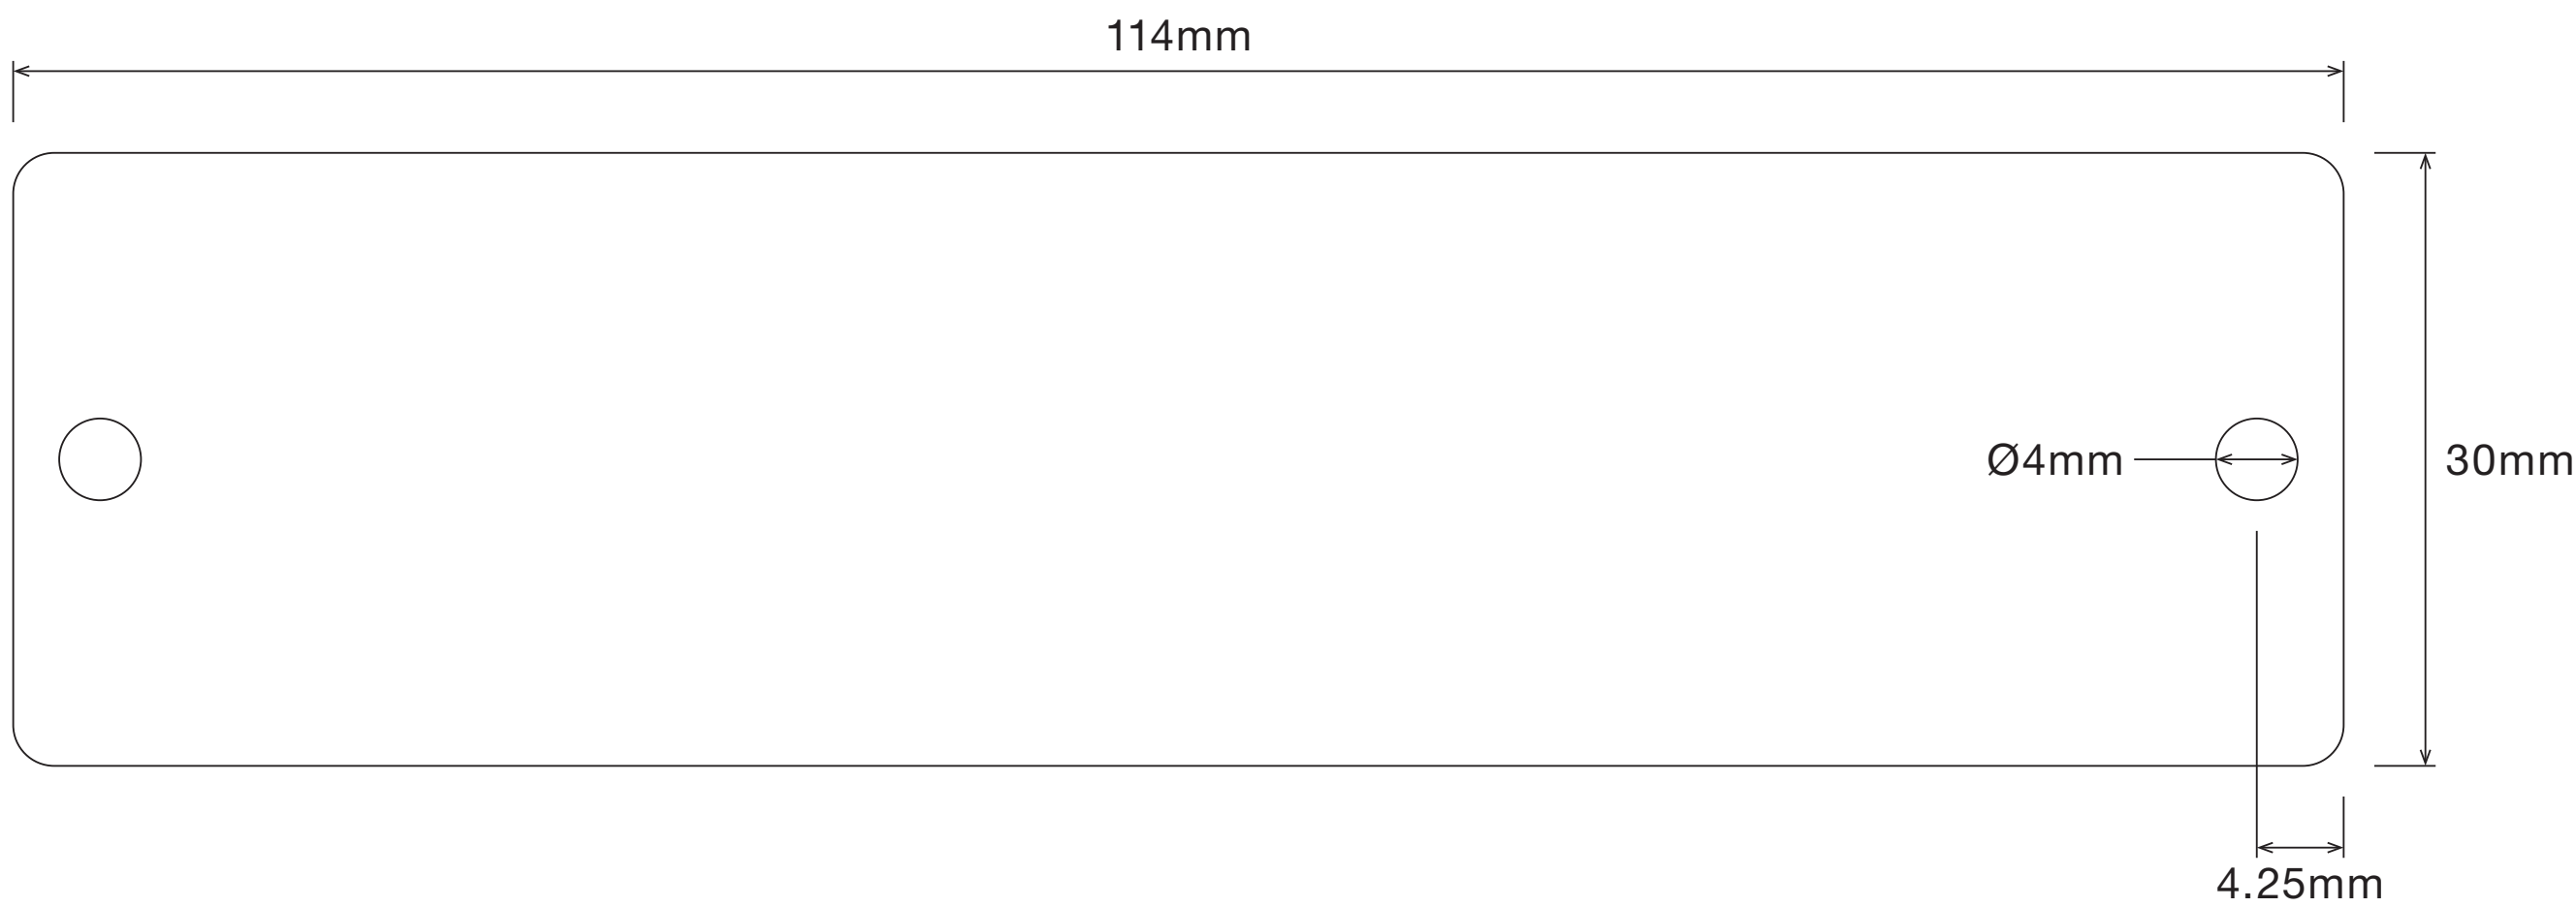

NOTE: "Made in XXXX" will be Australia or China
NOTE: XXXW indicates 30W, 50W, 75W, 100W, 120W, 150W, 180W, 200W, 240W

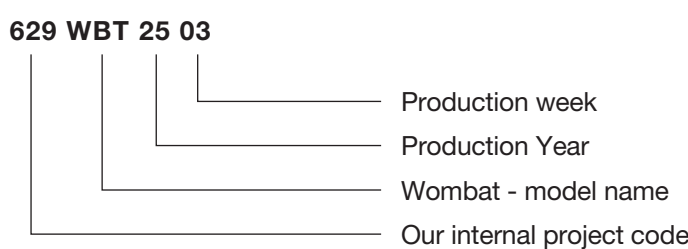DATE CODE

- | | |
|---------------------|----------------------------------|
| Materials | Aluminum AL1060 |
| Thickness | 0.4mm |
| Treated | Anodized |
| Colour | Black |
| Assembly | Rivet at both sites of nameplate |
| Font | Helvetica Neue Suite 4-8pt |
| Class. text | Light Condensed 5pt |
| Warning text | Light Condensed 4pt |

Label Location

