





General Specifications

Frequency Range	2400 – 2500 MHz 5150 – 5850 MHz
V.S.W.R	≤ 3.0
Radiation	Toroidal
Polarization	Linear
Impedance	50 Ω
Connector	RP-SMA female
Dimensions	110 x Ø10 mm
Weight	g
Operating Temperature	-40 °C to 65 °C -40°F to 149°F


RF Specifications

Frequency (MHz)	Gain (dBi)
2400	2.10
2450	2.76
2500	1.3
5150	2.3
5250	2.33
5350	2.47
5425	2.25
5550	2.15
5725	1.56
5850	1.03

Antenna Report

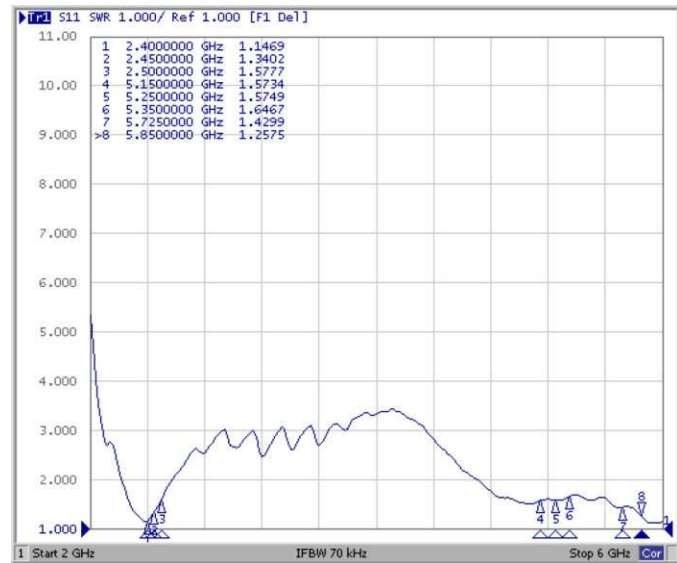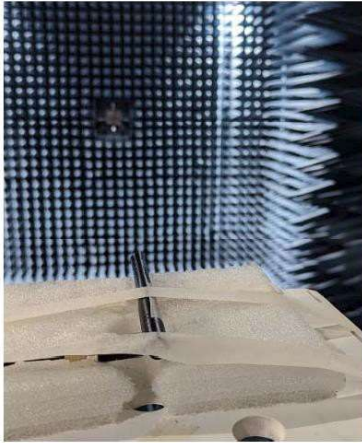

H-Plane

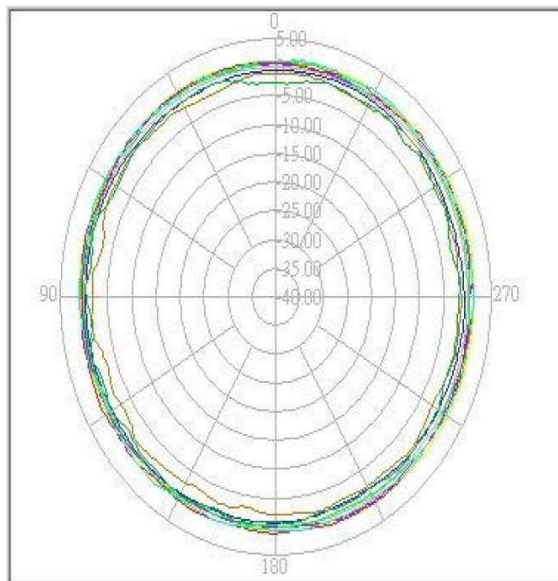

E-Plane

