



Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11ax40 Mode Low Channel 5190MHz Band1

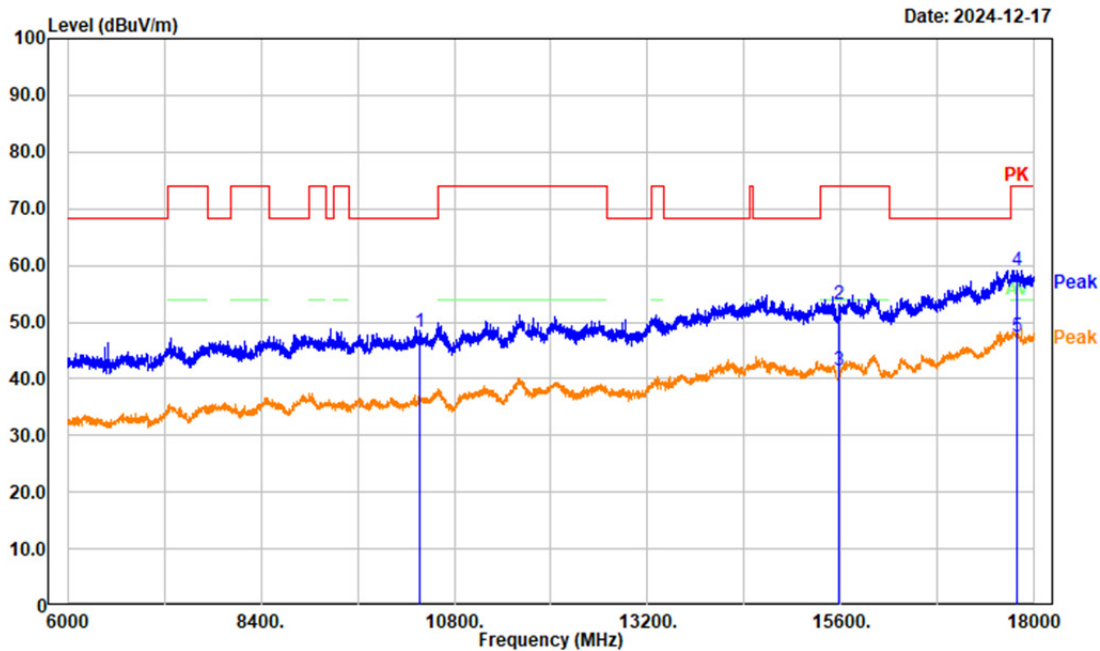


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10380.000	34.87	13.43	48.30	68.20	19.90	Peak
2	15570.000	36.31	16.93	53.24	74.00	20.76	Peak
3	15570.000	24.51	16.93	41.44	54.00	12.56	Average
4	17774.400	33.37	25.81	59.18	74.00	14.82	Peak
5	17774.400	21.58	25.81	47.39	54.00	6.61	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11ax80 Mode Middle Channel 5210MHz Band1

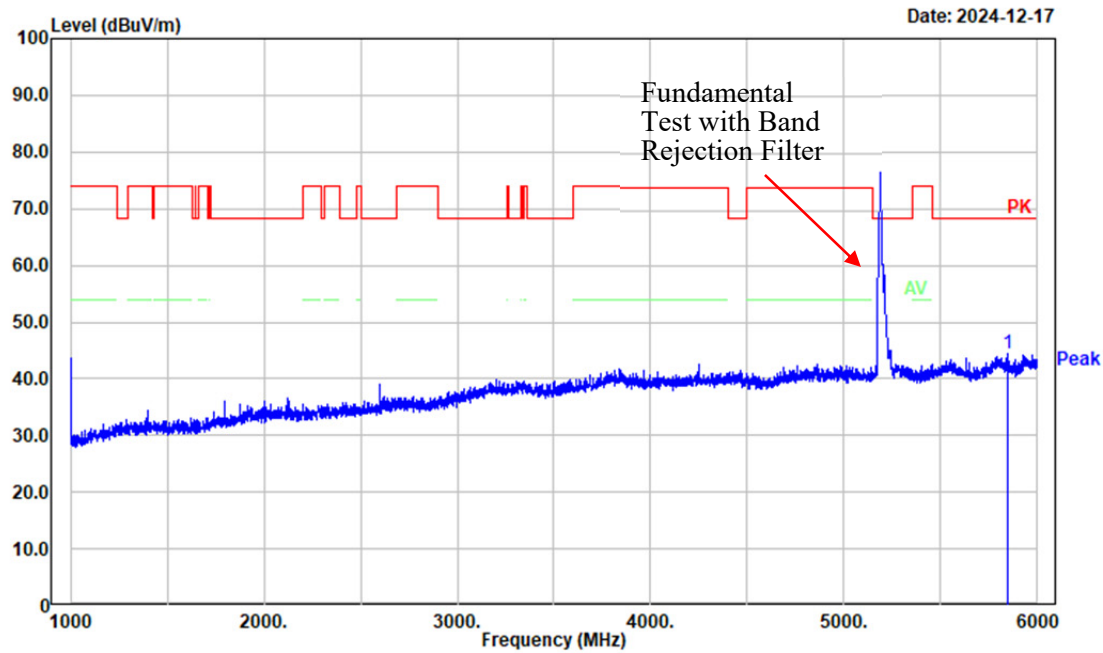


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5846.000	35.28	9.29	44.57	68.20	23.63	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11ax80 Mode Middle Channel 5210MHz Band1

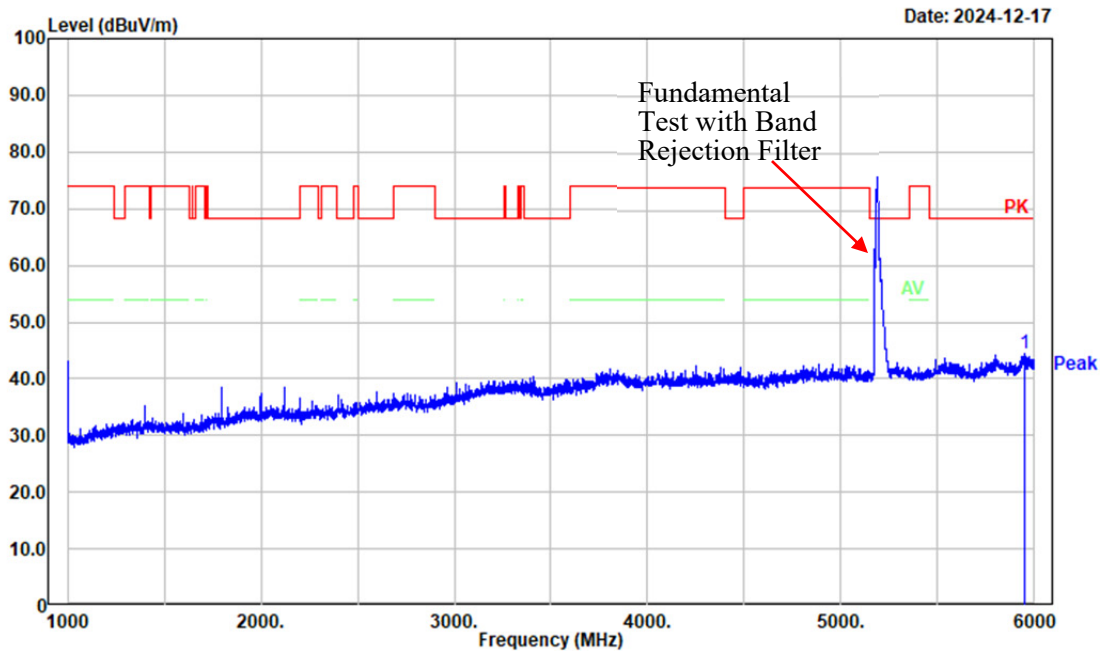


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5947.000	34.47	10.04	44.51	68.20	23.69	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: 802.11ax80 Mode Middle Channel 5210MHz Band1

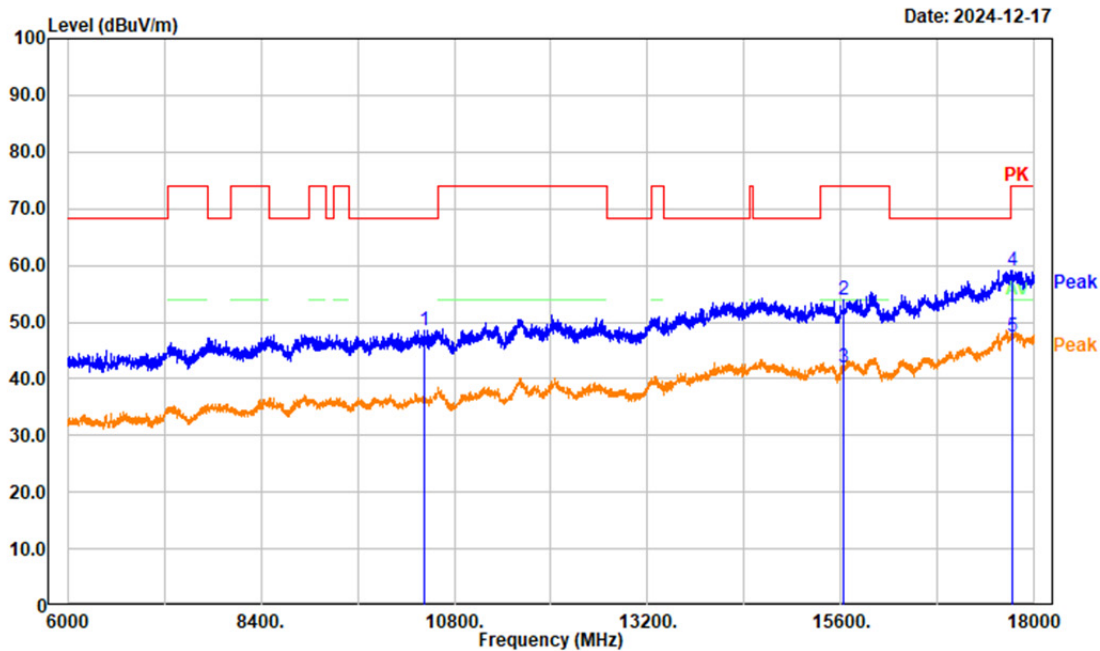


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10420.000	34.68	13.74	48.42	68.20	19.78	Peak
2	15630.000	37.49	16.37	53.86	74.00	20.14	Peak
3	15630.000	25.53	16.37	41.90	54.00	12.10	Average
4	17719.200	33.32	25.89	59.21	74.00	14.79	Peak
5	17719.200	21.66	25.89	47.55	54.00	6.45	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11ax80 Mode Middle Channel 5210MHz Band1

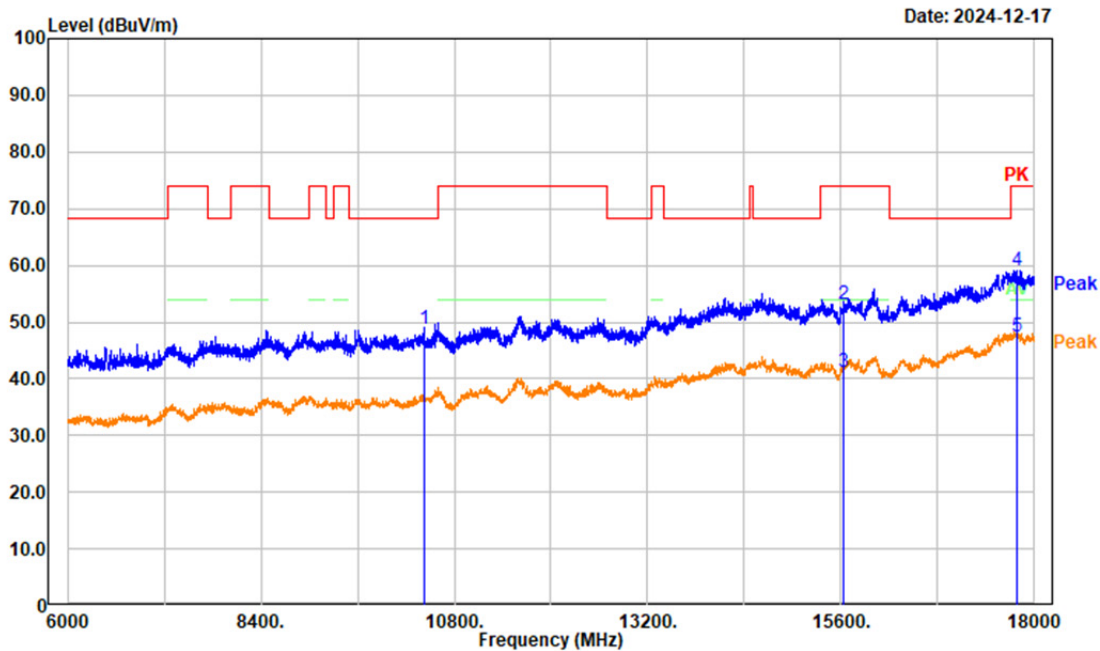


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	10420.000	35.17	13.74	48.91	68.20	19.29	Peak
2	15630.000	36.67	16.37	53.04	74.00	20.96	Peak
3	15630.000	24.77	16.37	41.14	54.00	12.86	Average
4	17776.800	33.40	25.80	59.20	74.00	14.80	Peak
5	17776.800	21.49	25.80	47.29	54.00	6.71	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11a Mode High Channel 5825MHz Band4

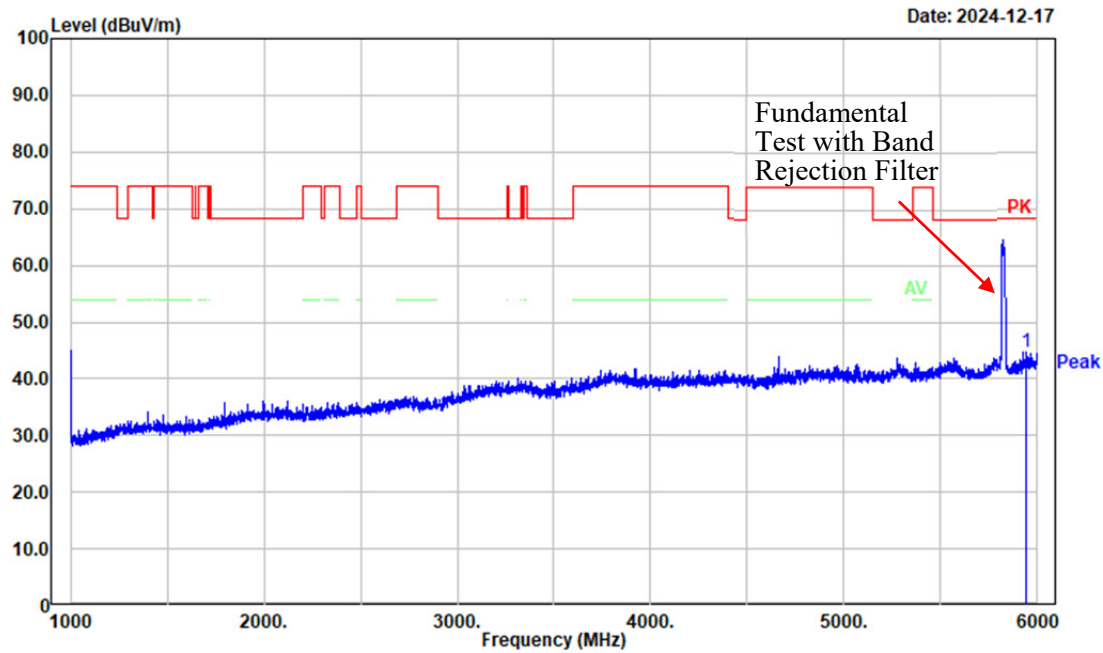


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5941.000	34.85	9.97	44.82	68.20	23.38	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11a Mode High Channel 5825MHz Band4

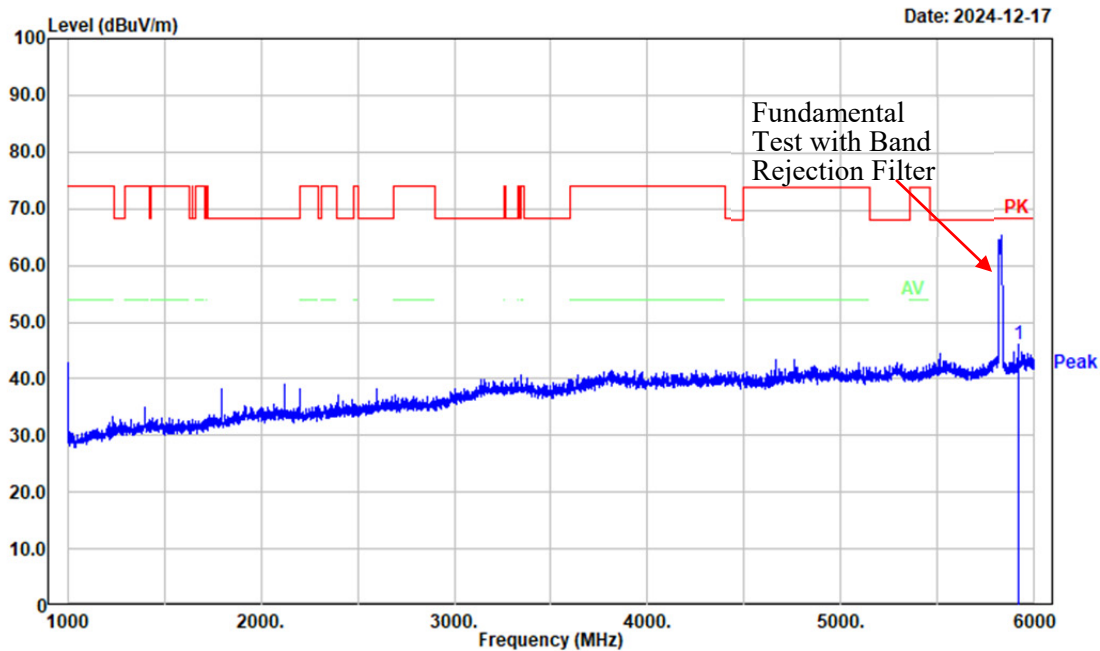


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5920.000	36.20	9.78	45.98	68.20	22.22	Peak

Project No.: 2403Z107562E-RF
 Tester: Mack Huang
 Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
 Polarization: horizontal
 Note: 802.11a Mode High Channel 5825MHz Band4

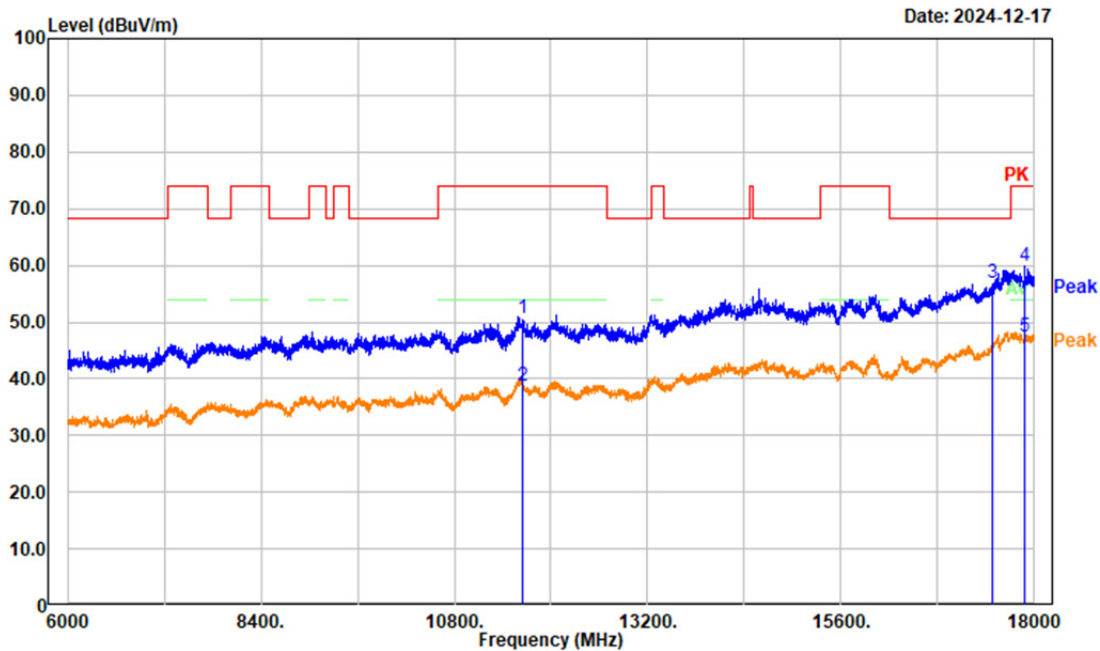


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	35.23	15.54	50.77	74.00	23.23	Peak
2	11650.000	23.34	15.54	38.88	54.00	15.12	Average
3	17475.000	34.44	22.53	56.97	68.20	11.23	Peak
4	17875.200	34.17	25.65	59.82	74.00	14.18	Peak
5	17875.200	21.79	25.65	47.44	54.00	6.56	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11a Mode High Channel 5825MHz Band4

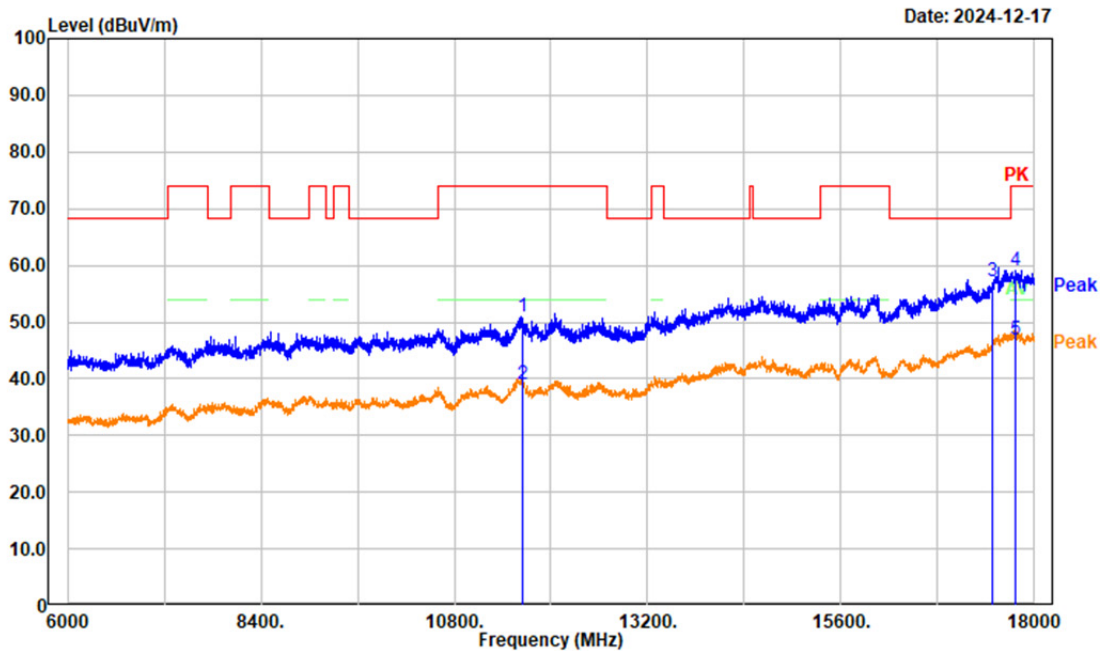


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	35.36	15.54	50.90	74.00	23.10	Peak
2	11650.000	23.41	15.54	38.95	54.00	15.05	Average
3	17475.000	34.53	22.53	57.06	68.20	11.14	Peak
4	17760.000	33.16	25.83	58.99	74.00	15.01	Peak
5	17760.000	21.15	25.83	46.98	54.00	7.02	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11a Mode High Channel 5825MHz Band4

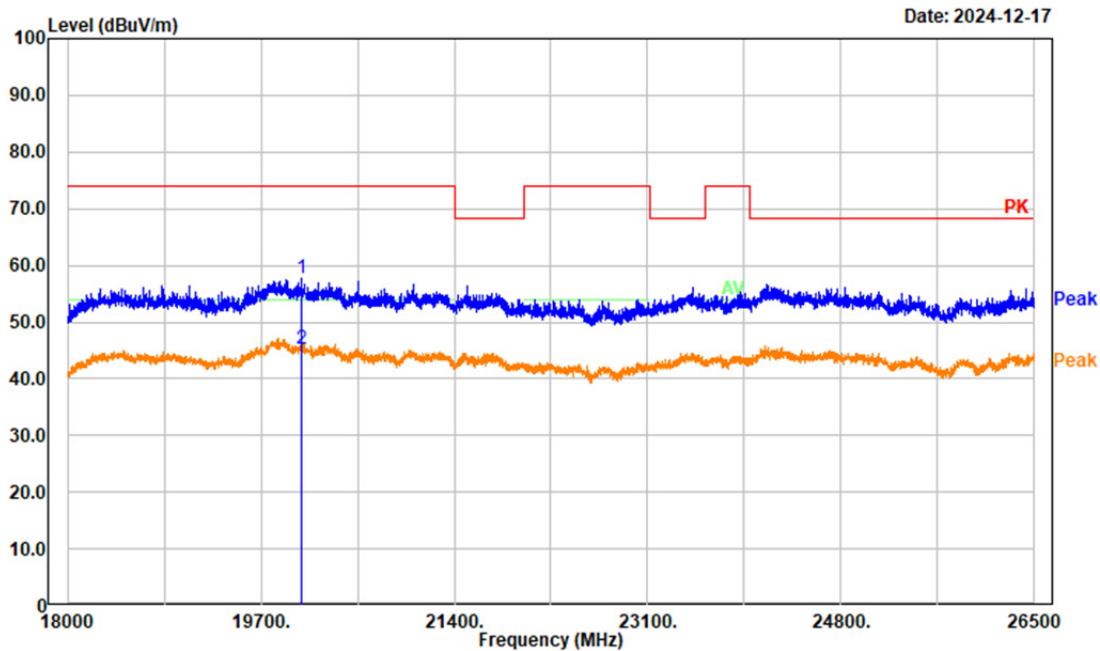


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	20055.300	50.67	6.99	57.66	74.00	16.34	Peak
2	20055.300	38.22	6.99	45.21	54.00	8.79	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11a Mode High Channel 5825MHz Band4

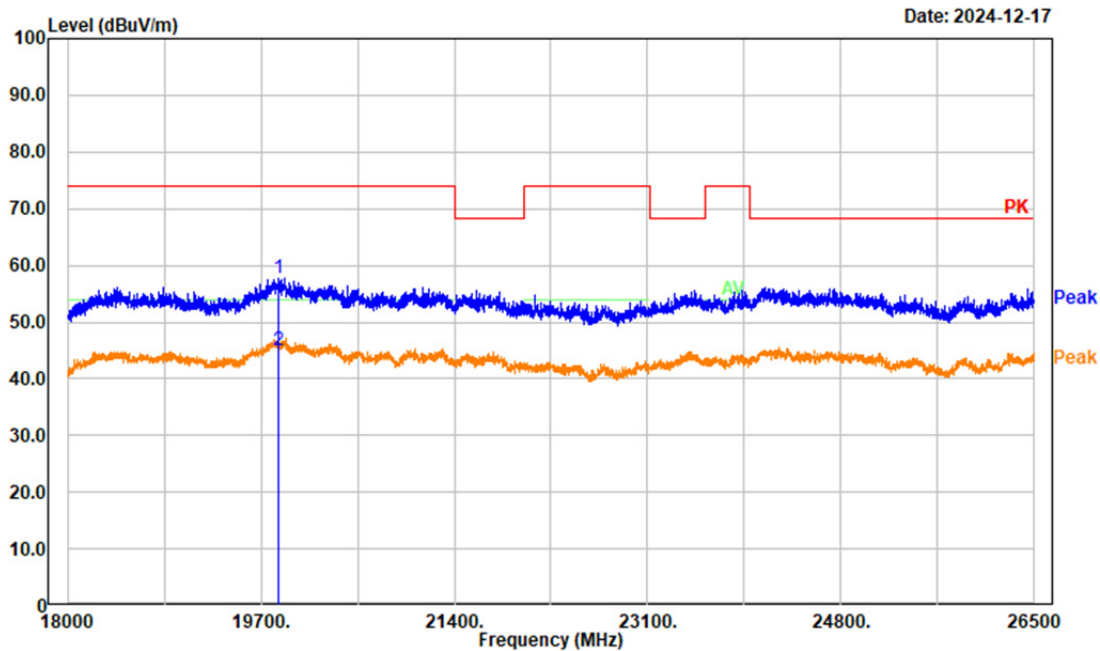


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	19849.600	49.79	7.96	57.75	74.00	16.25	Peak
2	19849.600	36.90	7.96	44.86	54.00	9.14	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: Horizontal
Note: 802.11a Mode High Channel 5825MHz Band4

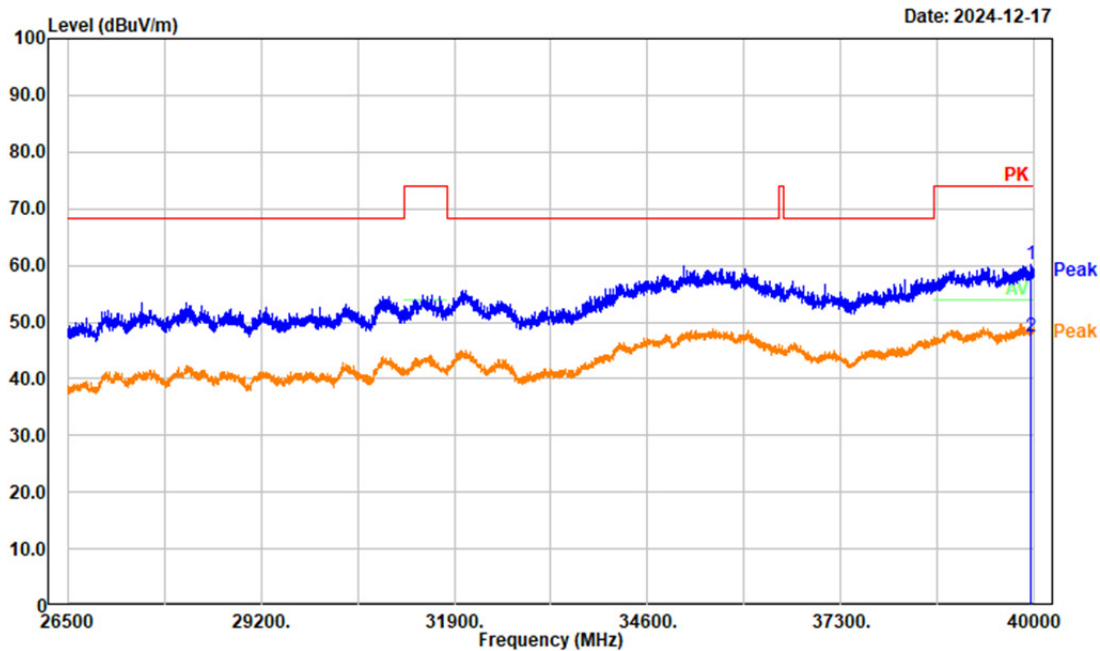


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39943.300	53.18	7.11	60.29	74.00	13.71	Peak
2	39943.300	40.30	7.11	47.41	54.00	6.59	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11a Mode High Channel 5825MHz Band4

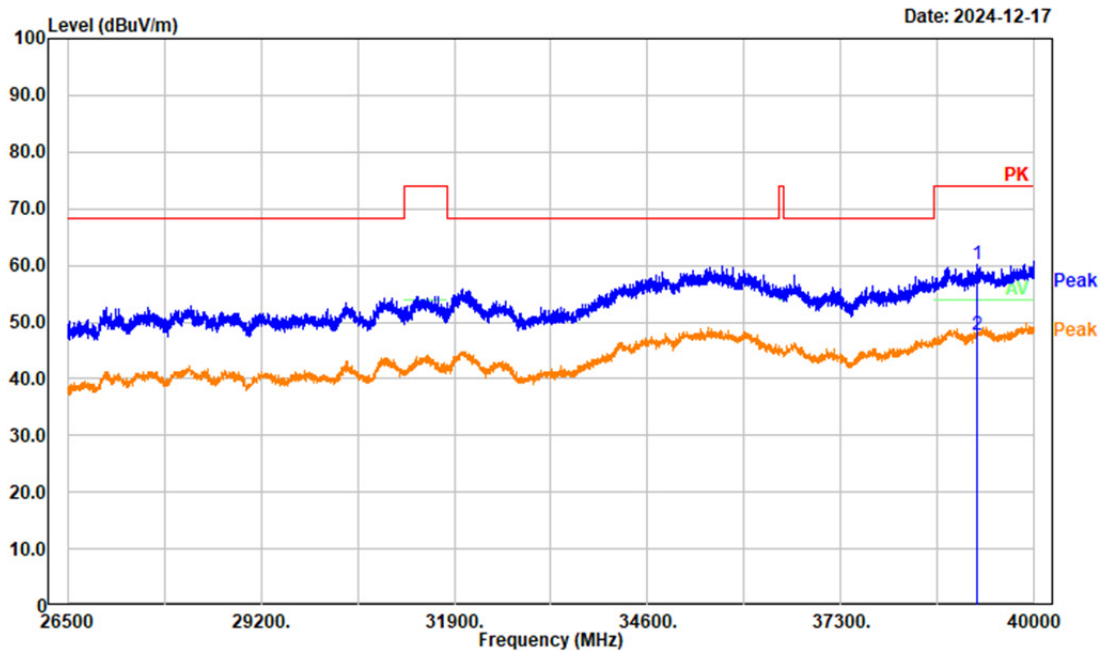


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39195.400	51.77	8.43	60.20	74.00	13.80	Peak
2	39195.400	39.22	8.43	47.65	54.00	6.35	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11n20 Mode High Channel 5825MHz Band4

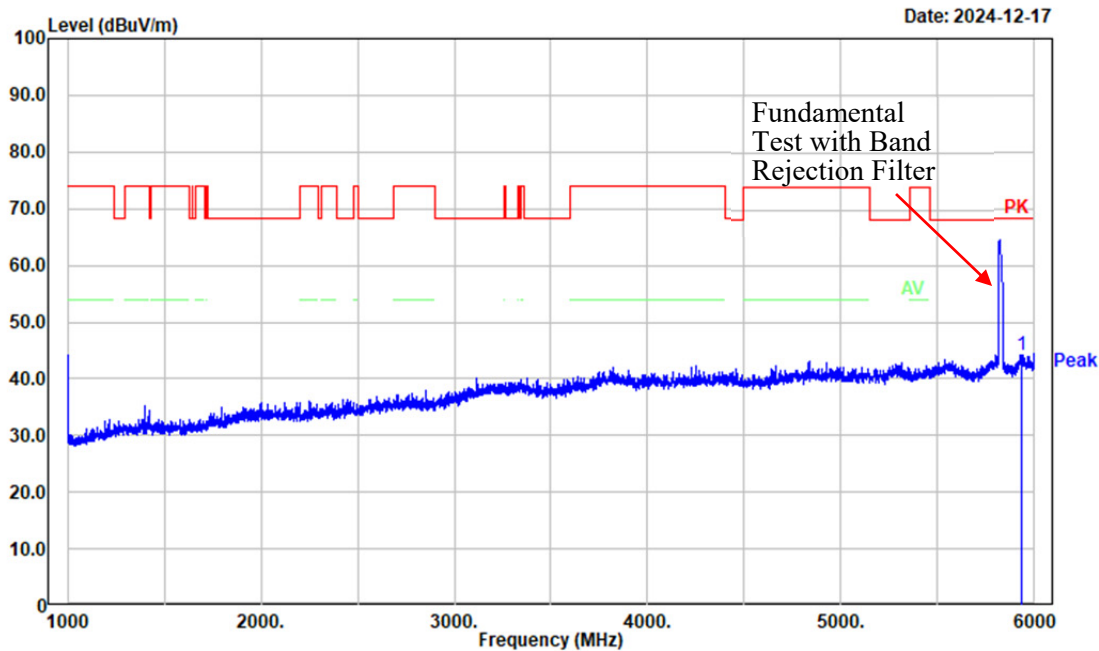


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5932.000	34.37	9.90	44.27	68.20	23.93	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11n20 Mode High Channel 5825MHz Band4

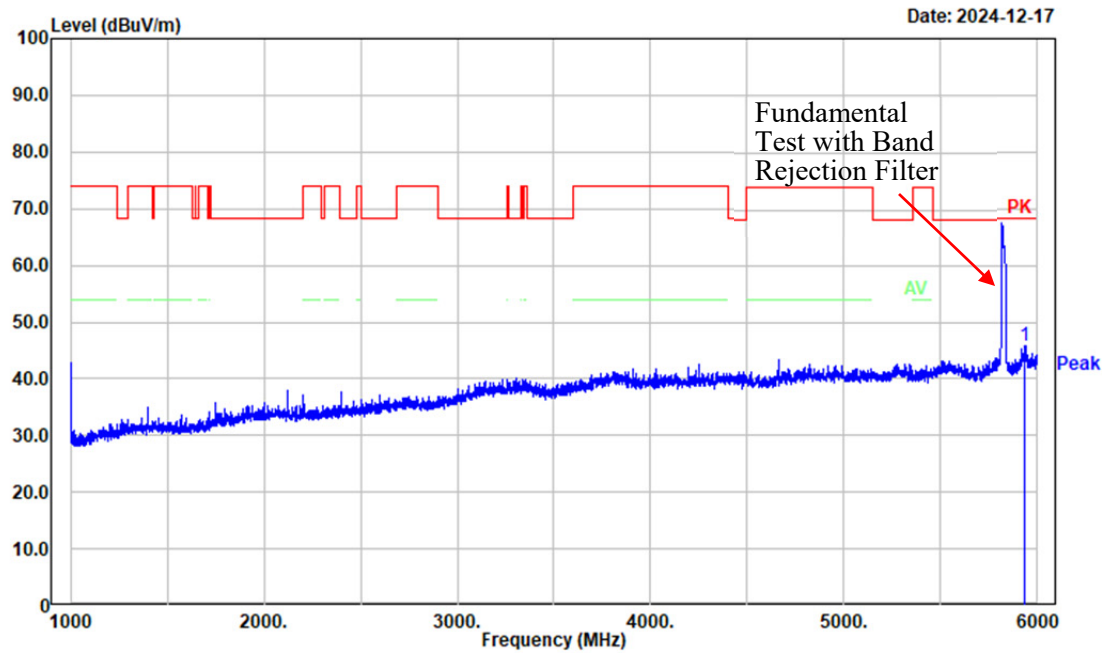


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5930.000	35.82	9.88	45.70	68.20	22.50	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: 802.11n20 Mode High Channel 5825MHz Band4

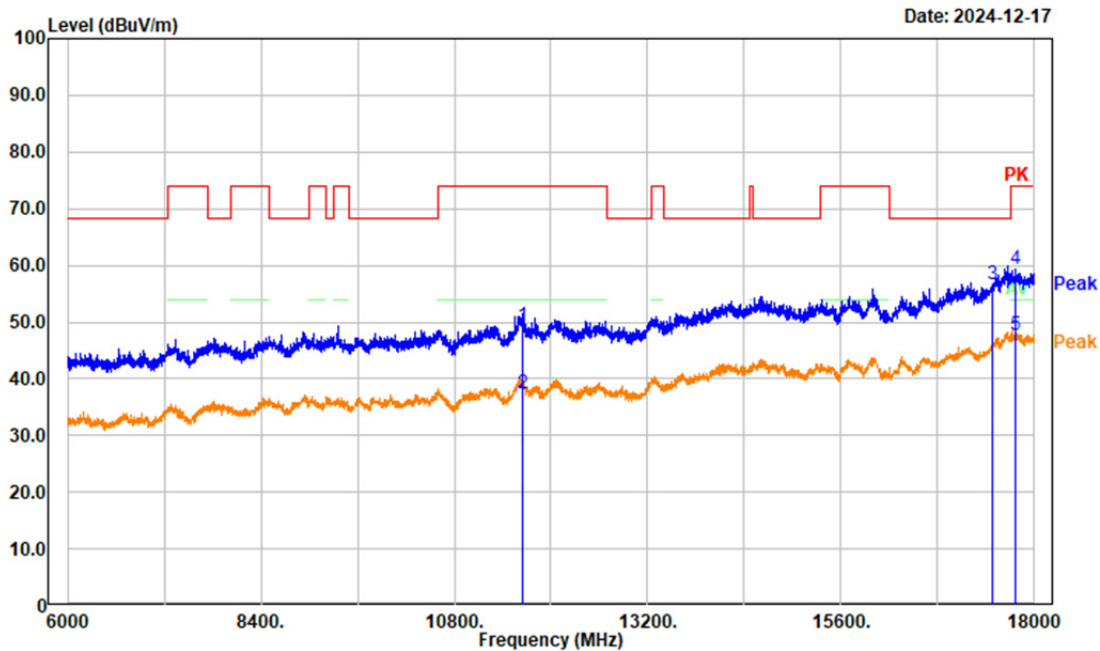


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	33.91	15.54	49.45	74.00	24.55	Peak
2	11650.000	21.87	15.54	37.41	54.00	16.59	Average
3	17475.000	34.22	22.53	56.75	68.20	11.45	Peak
4	17772.000	33.50	25.82	59.32	74.00	14.68	Peak
5	17772.000	21.86	25.82	47.68	54.00	6.32	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11n20 Mode High Channel 5825MHz Band4

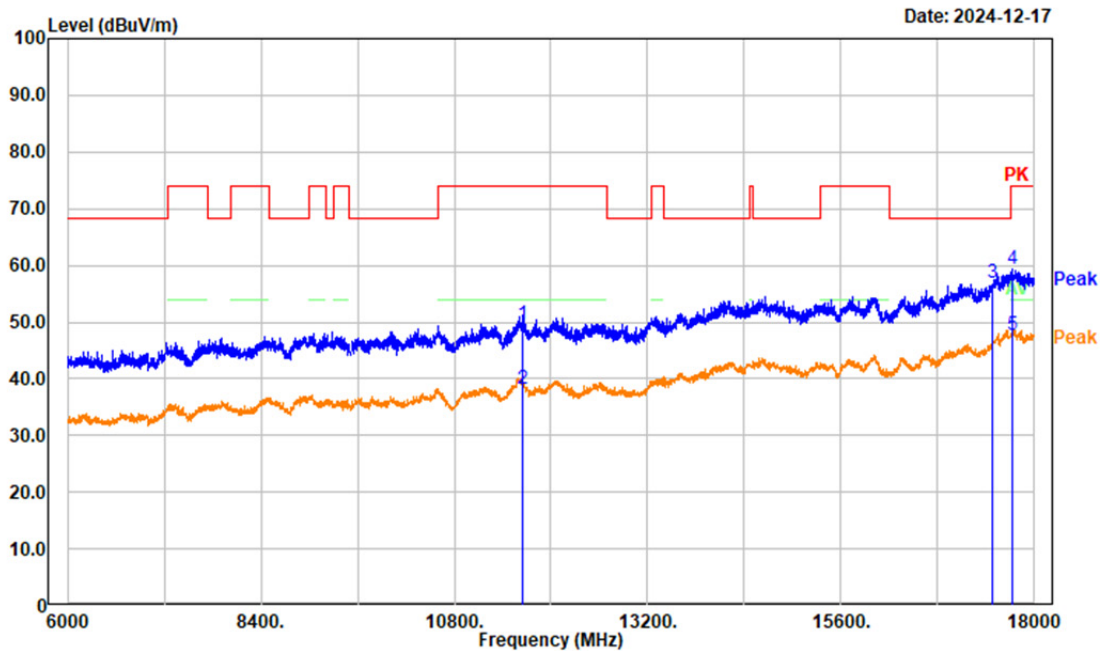


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	34.10	15.54	49.64	74.00	24.36	Peak
2	11650.000	22.55	15.54	38.09	54.00	15.91	Average
3	17475.000	34.28	22.53	56.81	68.20	11.39	Peak
4	17721.600	33.37	25.87	59.24	74.00	14.76	Peak
5	17721.600	21.80	25.87	47.67	54.00	6.33	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11n40 Mode High Channel 5795MHz Band4

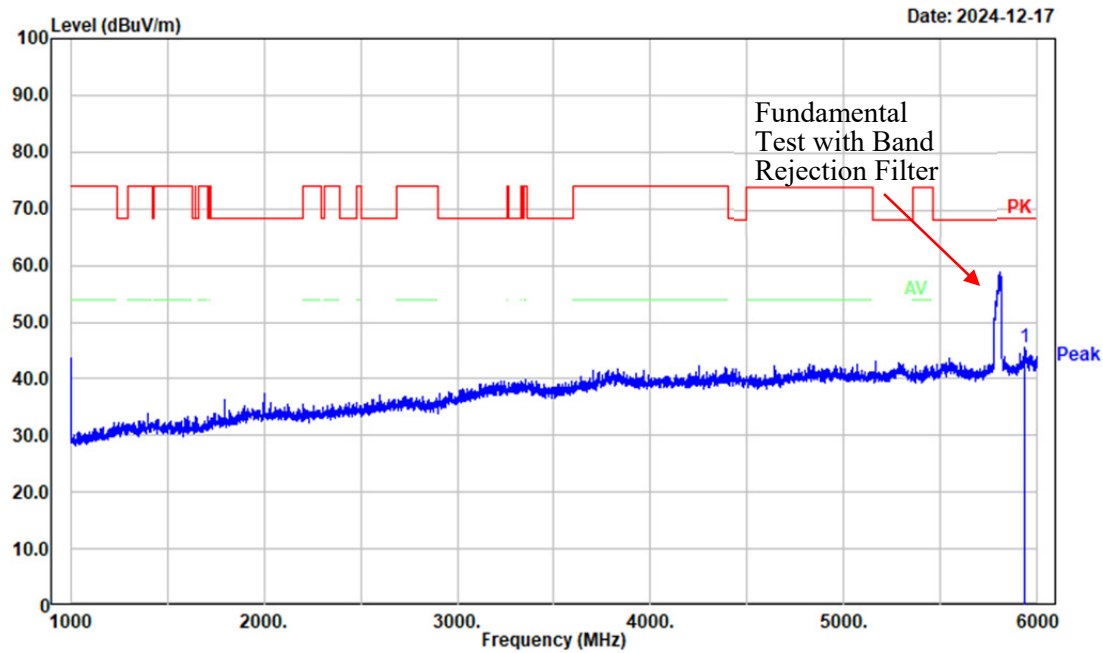


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5935.000	35.58	9.92	45.50	68.20	22.70	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11n40 Mode High Channel 5795MHz Band4

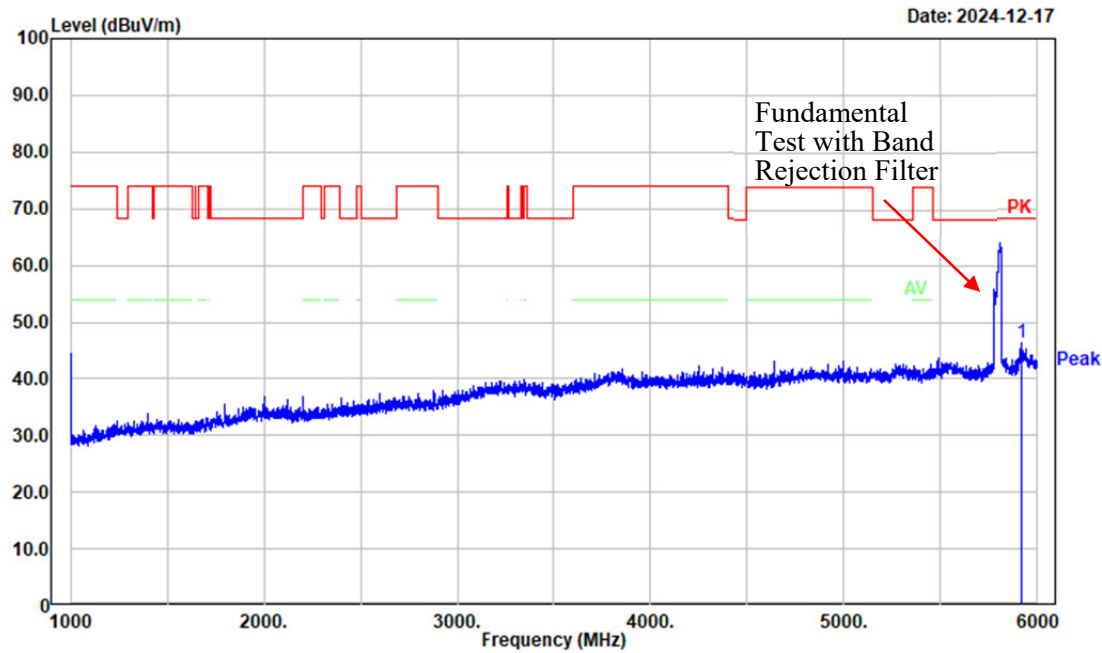


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5914.000	36.72	9.74	46.46	68.20	21.74	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: 802.11n40 Mode High Channel 5795MHz Band4

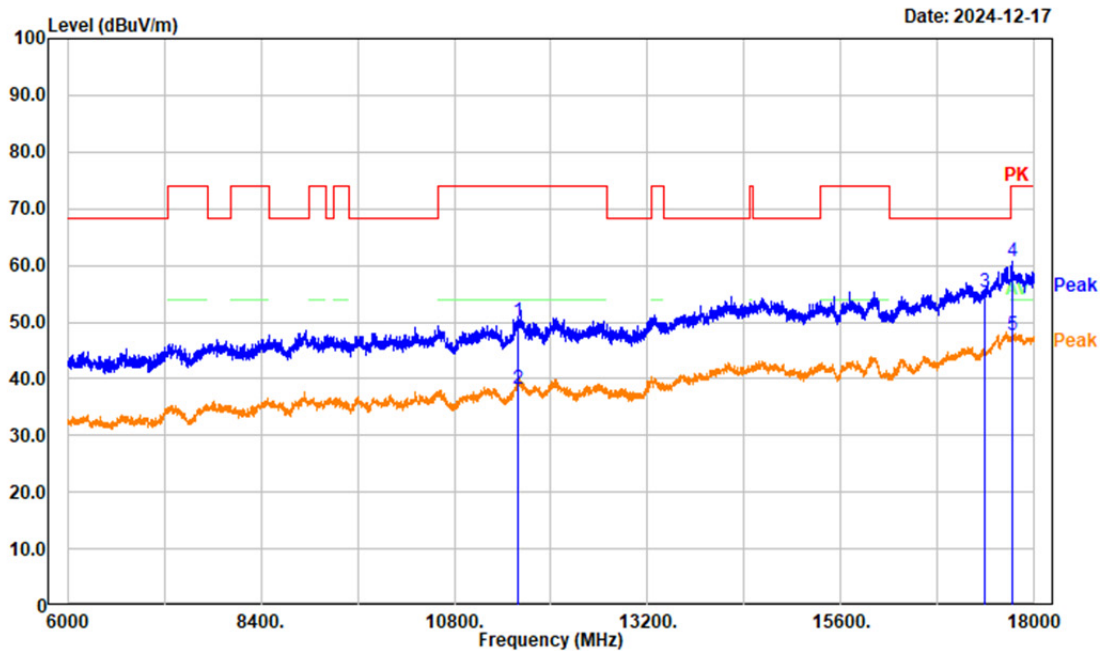


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11590.000	34.24	15.84	50.08	74.00	23.92	Peak
2	11590.000	22.47	15.84	38.31	54.00	15.69	Average
3	17385.000	33.61	21.68	55.29	68.20	12.91	Peak
4	17726.400	34.75	25.87	60.62	74.00	13.38	Peak
5	17726.400	21.79	25.87	47.66	54.00	6.34	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11n40 Mode High Channel 5795MHz Band4

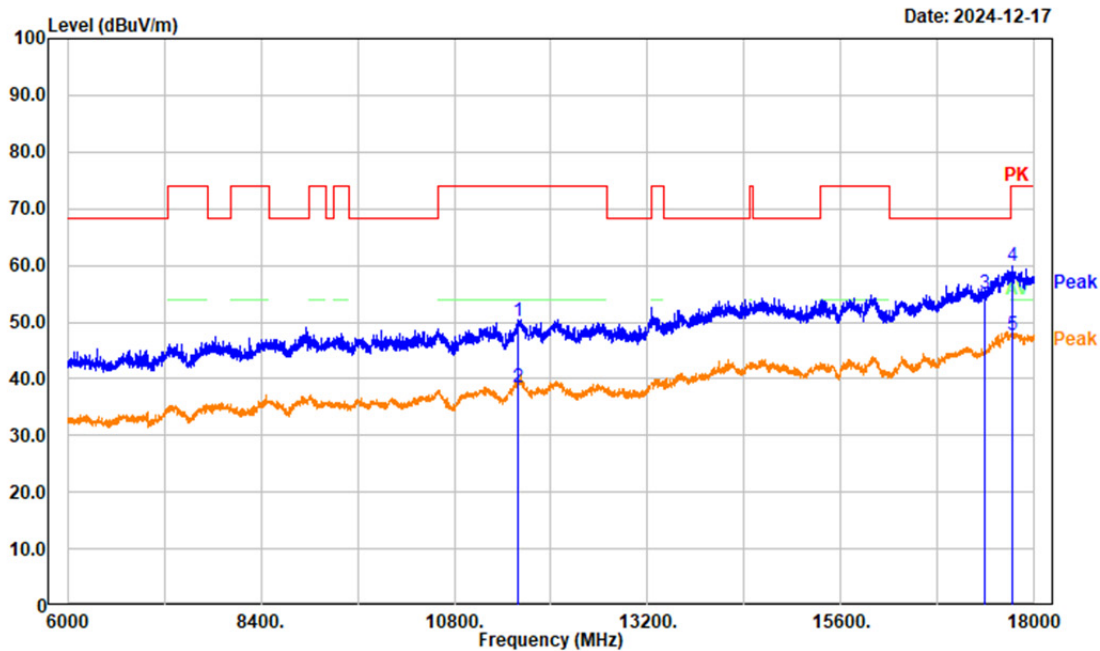

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11590.000	34.33	15.84	50.17	74.00	23.83	Peak
2	11590.000	22.56	15.84	38.40	54.00	15.60	Average
3	17385.000	33.39	21.68	55.07	68.20	13.13	Peak
4	17724.000	33.94	25.87	59.81	74.00	14.19	Peak
5	17724.000	21.76	25.87	47.63	54.00	6.37	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11ac80 Mode Middle Channel 5775MHz Band4

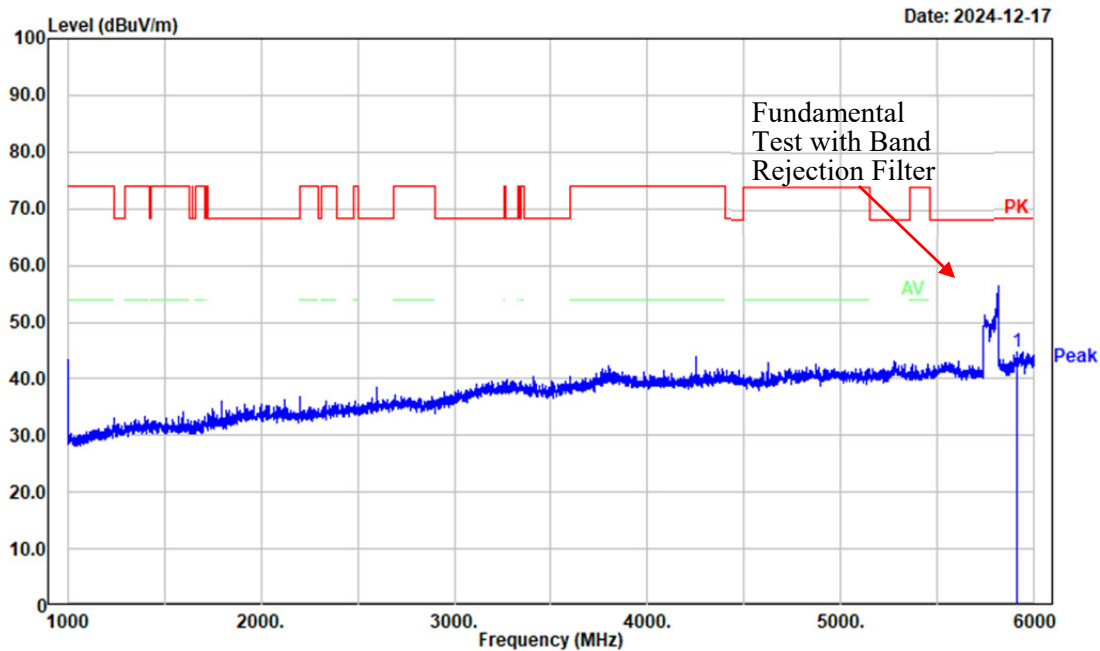

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5906.000	35.18	9.65	44.83	68.20	23.37	Peak