



Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11ac80 Mode Middle Channel 5775MHz Band4

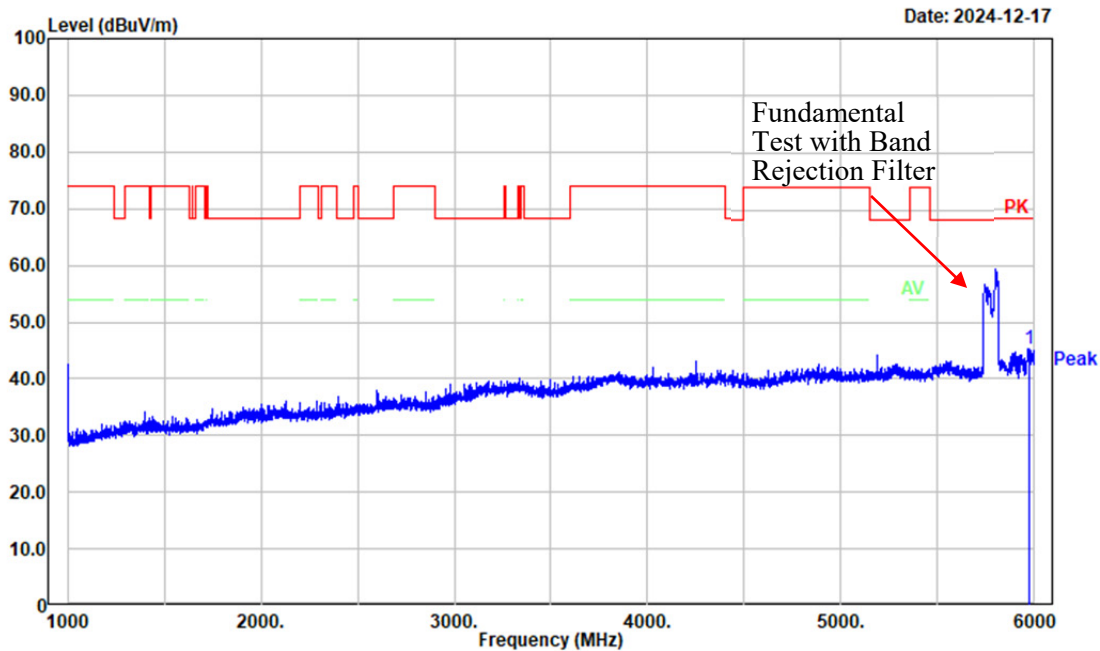


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5970.000	35.20	10.14	45.34	68.20	22.86	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: 802.11ac80 Mode Middle Channel 5775MHz Band4

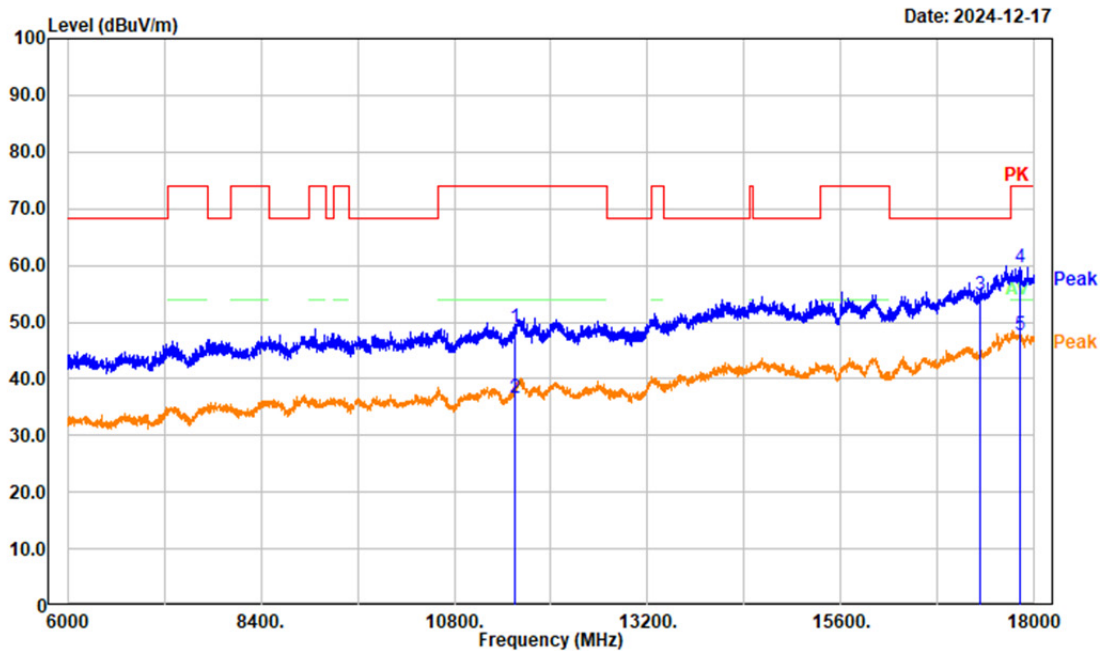


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	33.93	15.07	49.00	74.00	25.00	Peak
2	11550.000	21.58	15.07	36.65	54.00	17.35	Average
3	17325.000	33.39	21.27	54.66	68.20	13.54	Peak
4	17820.000	33.97	25.74	59.71	74.00	14.29	Peak
5	17820.000	21.83	25.74	47.57	54.00	6.43	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11ac80 Mode Middle Channel 5775MHz Band4

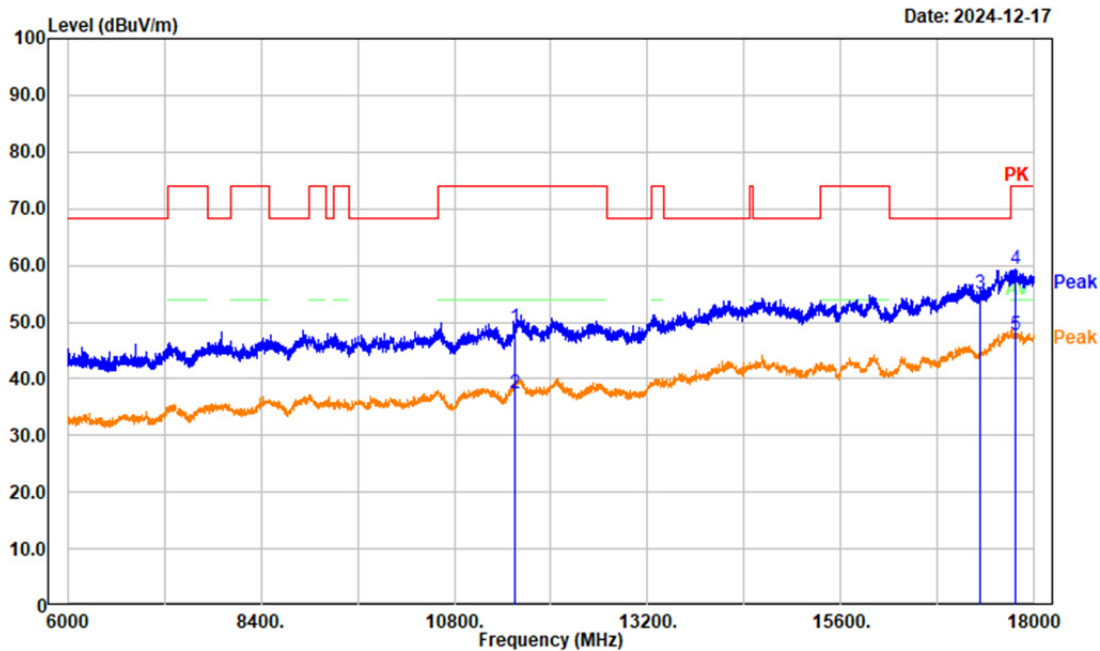


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	34.02	15.07	49.09	74.00	24.91	Peak
2	11550.000	22.30	15.07	37.37	54.00	16.63	Average
3	17325.000	33.78	21.27	55.05	68.20	13.15	Peak
4	17767.200	33.58	25.81	59.39	74.00	14.61	Peak
5	17767.200	21.77	25.81	47.58	54.00	6.42	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11ax20 Mode High Channel 5825MHz Band4

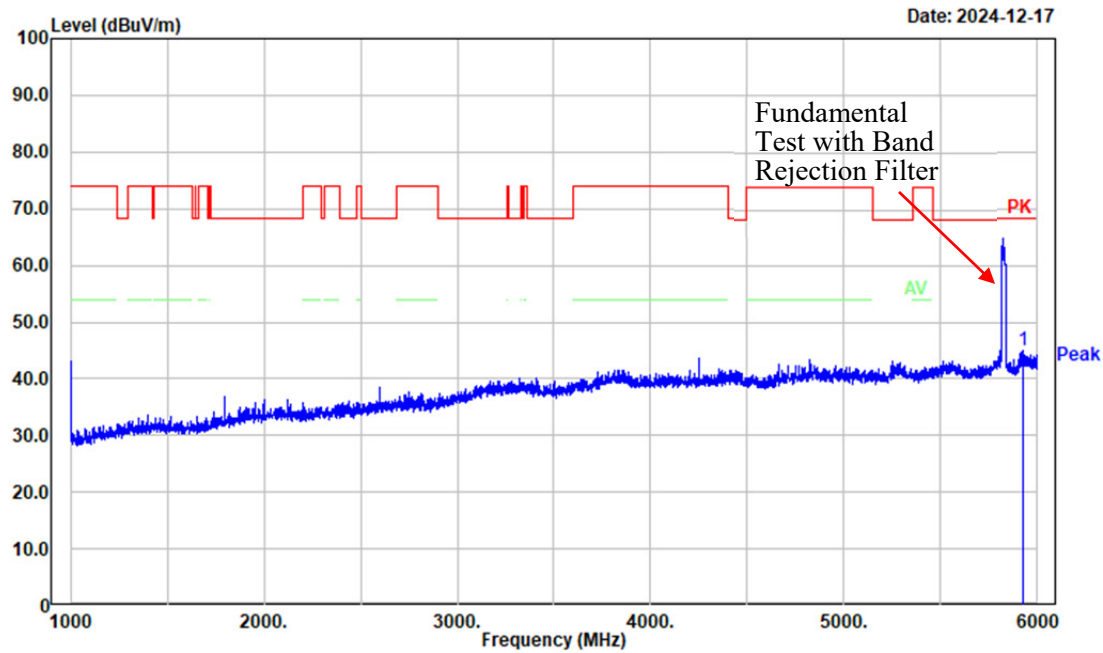


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5926.000	35.26	9.83	45.09	68.20	23.11	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11ax20 Mode High Channel 5825MHz Band4

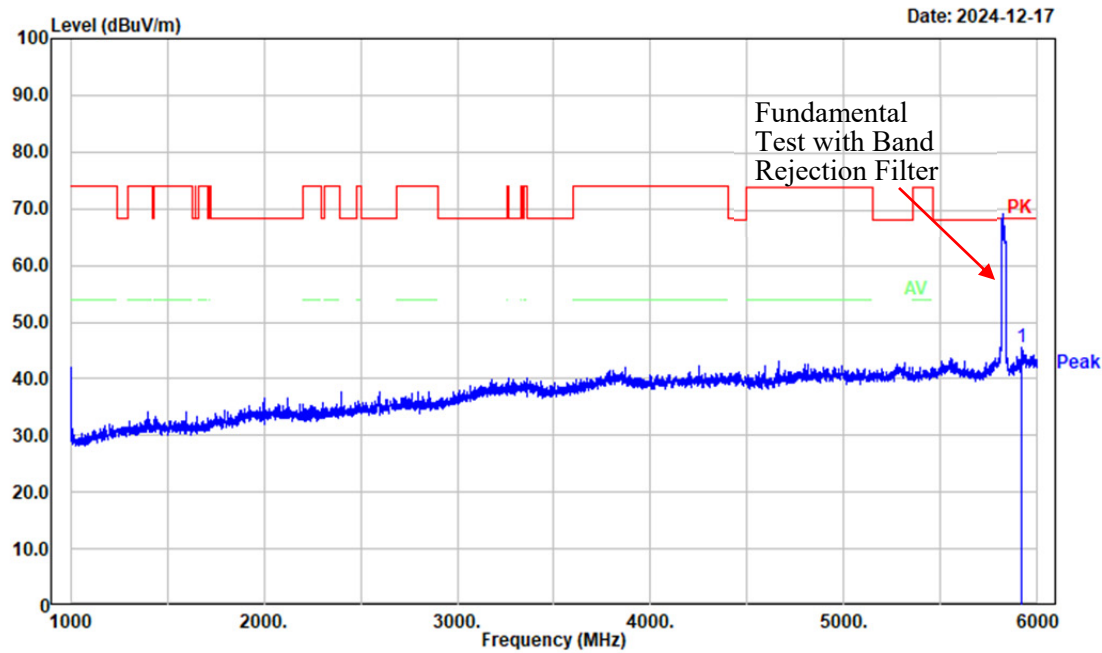


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5921.000	35.63	9.79	45.42	68.20	22.78	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: 802.11ax20 Mode High Channel 5825MHz Band4

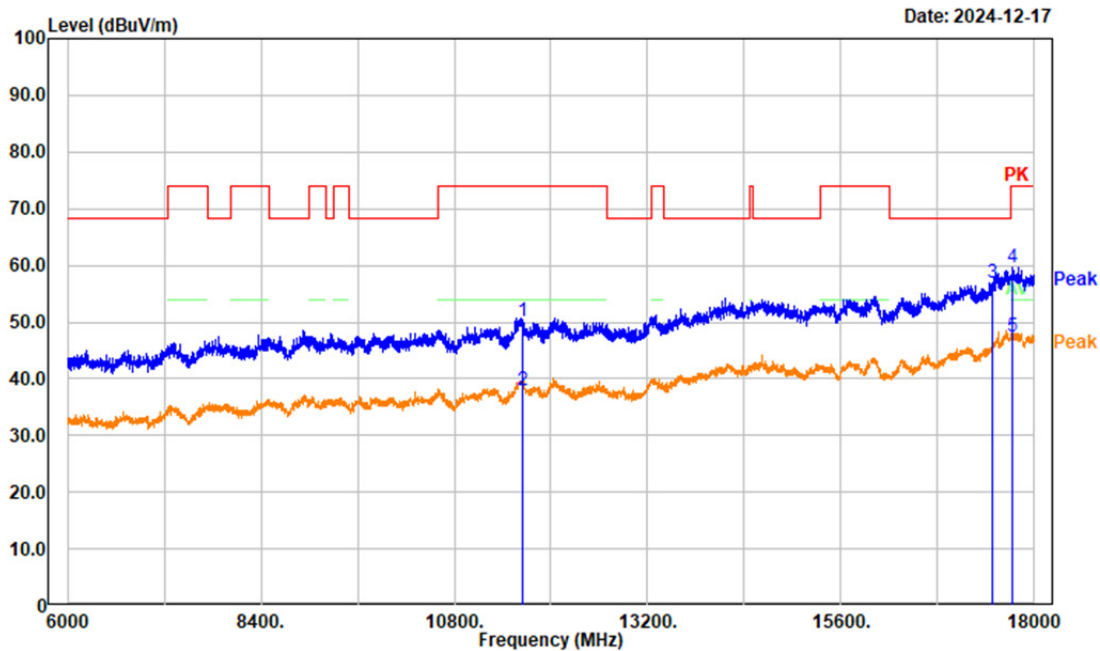


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	34.65	15.54	50.19	74.00	23.81	Peak
2	11650.000	22.41	15.54	37.95	54.00	16.05	Average
3	17475.000	34.35	22.53	56.88	68.20	11.32	Peak
4	17724.000	33.87	25.87	59.74	74.00	14.26	Peak
5	17724.000	21.54	25.87	47.41	54.00	6.59	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11ax20 Mode High Channel 5825MHz Band4

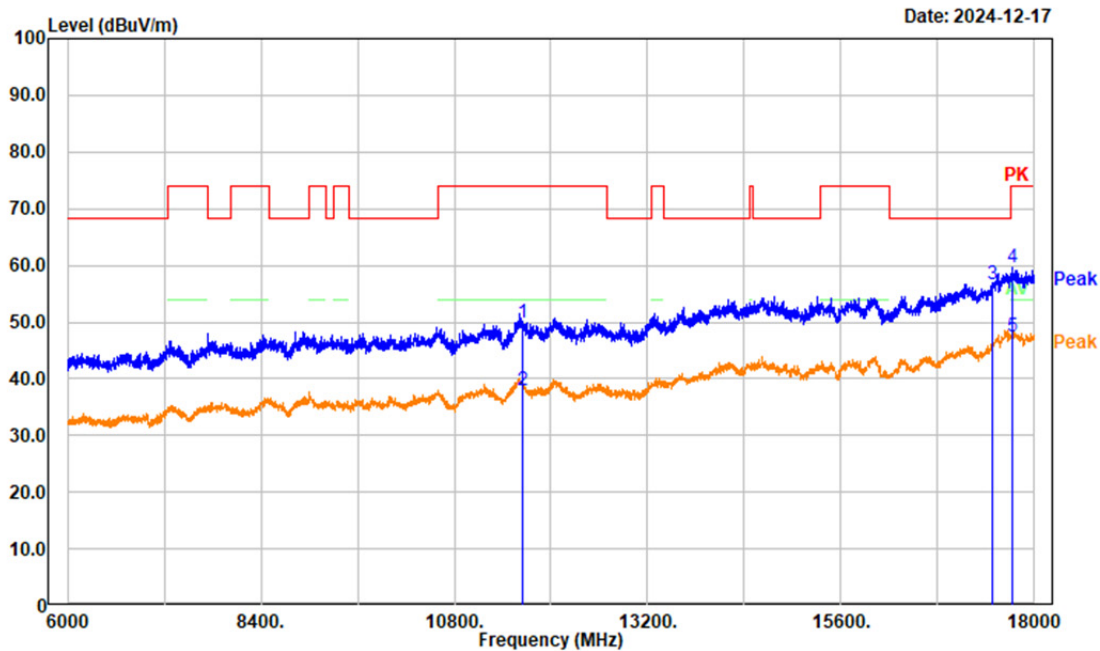


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	34.33	15.54	49.87	74.00	24.13	Peak
2	11650.000	22.30	15.54	37.84	54.00	16.16	Average
3	17475.000	34.08	22.53	56.61	68.20	11.59	Peak
4	17721.600	33.74	25.87	59.61	74.00	14.39	Peak
5	17721.600	21.65	25.87	47.52	54.00	6.48	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11ax40 Mode High Channel 5795MHz Band4

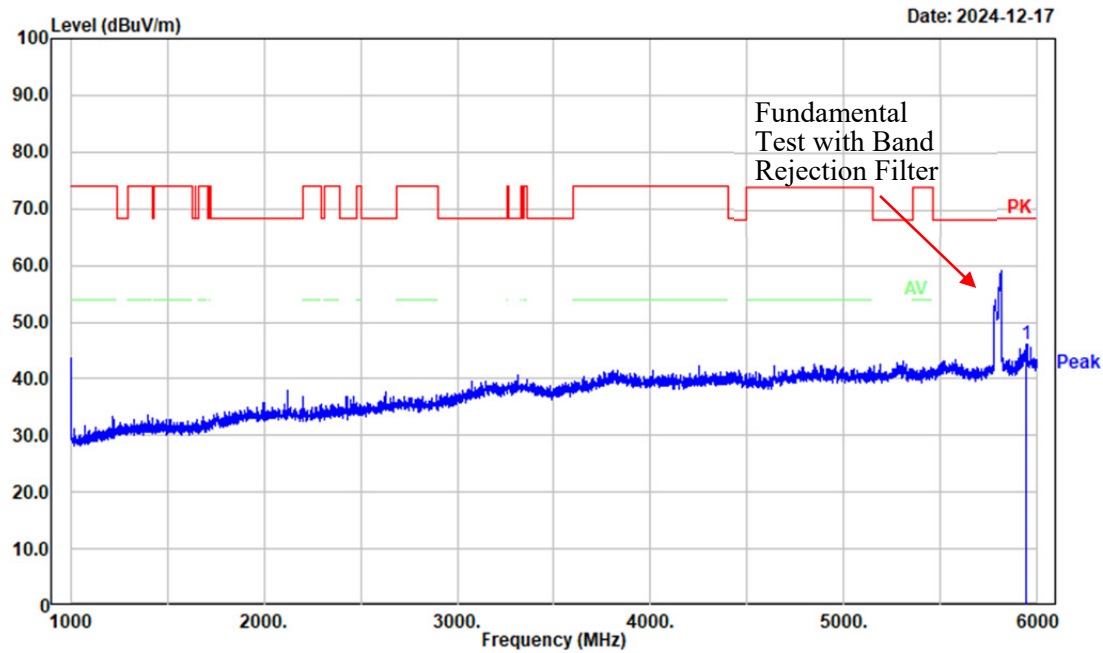


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5941.000	36.22	9.97	46.19	68.20	22.01	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11ax40 Mode High Channel 5795MHz Band4

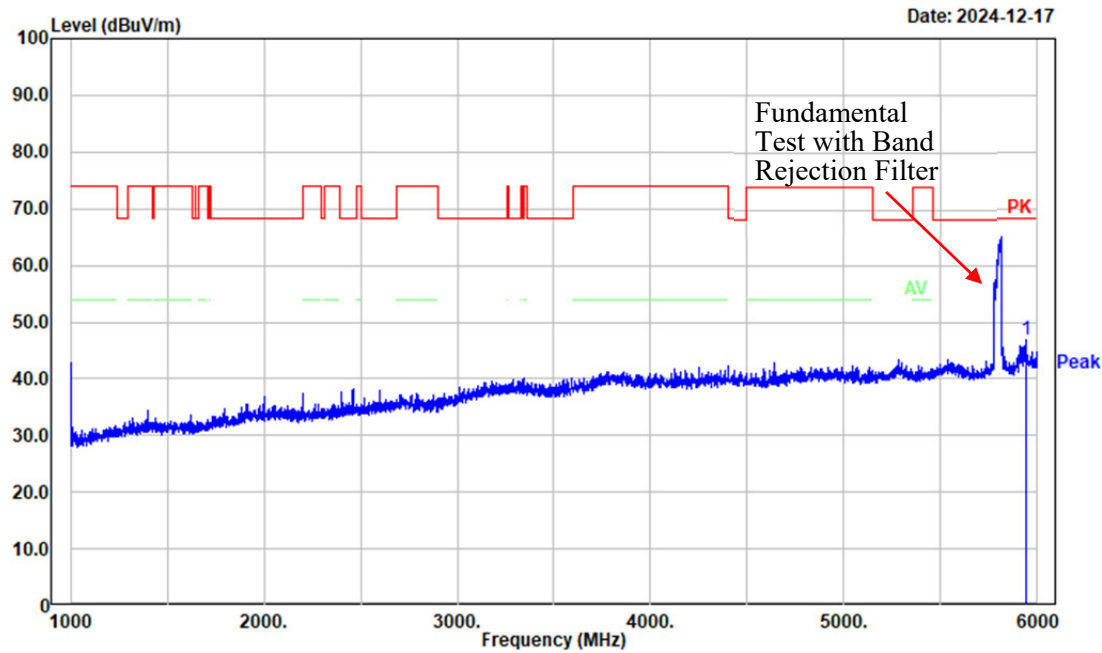


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5938.000	36.97	9.95	46.92	68.20	21.28	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: 802.11ax40 Mode High Channel 5795MHz Band4

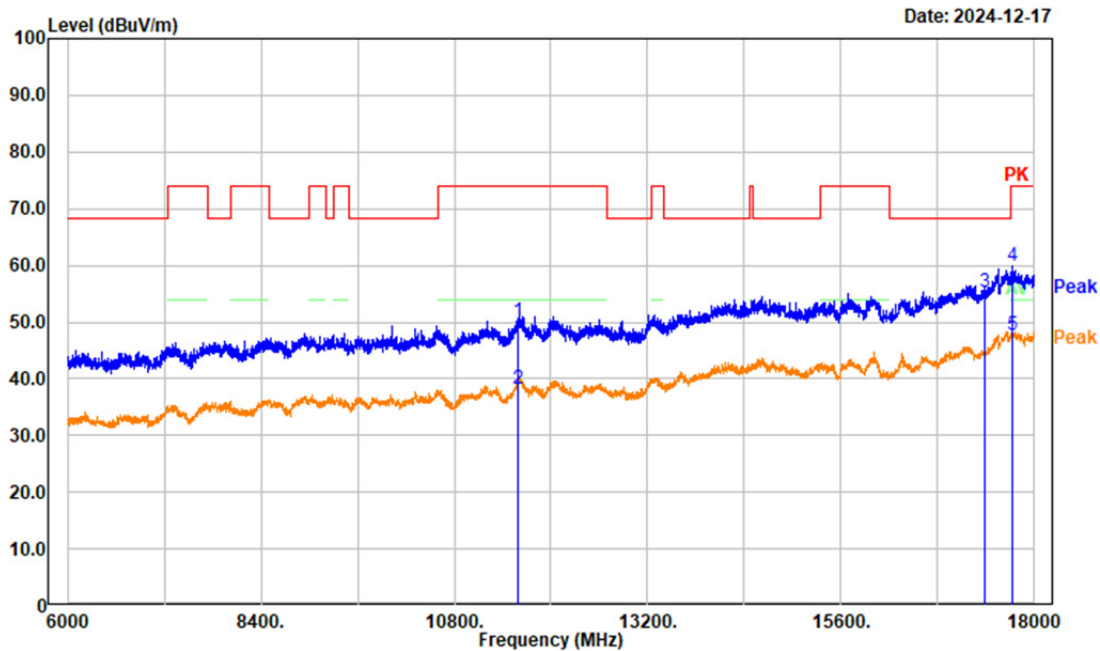


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11590.000	34.17	15.84	50.01	74.00	23.99	Peak
2	11590.000	22.40	15.84	38.24	54.00	15.76	Average
3	17385.000	33.56	21.68	55.24	68.20	12.96	Peak
4	17724.000	33.99	25.87	59.86	74.00	14.14	Peak
5	17724.000	21.74	25.87	47.61	54.00	6.39	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11ax40 Mode High Channel 5795MHz Band4

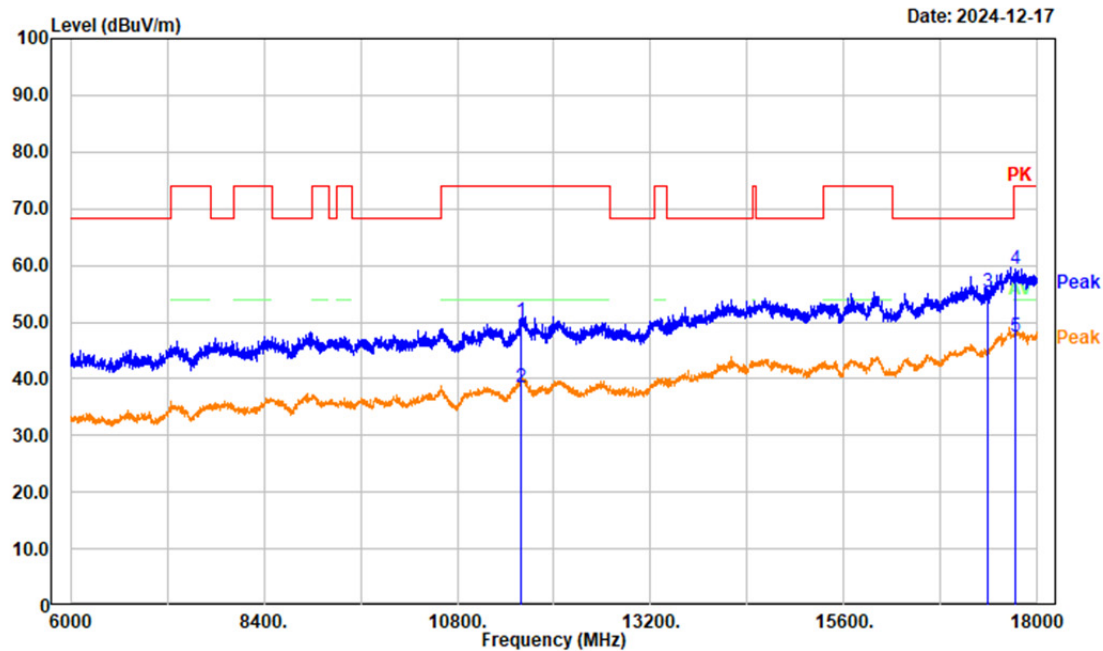


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11590.000	34.25	15.84	50.09	74.00	23.91	Peak
2	11590.000	22.71	15.84	38.55	54.00	15.45	Average
3	17385.000	33.72	21.68	55.40	68.20	12.80	Peak
4	17726.400	33.61	25.87	59.48	74.00	14.52	Peak
5	17726.400	21.56	25.87	47.43	54.00	6.57	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: horizontal
Note: 802.11ax80 Mode Middle Channel 5775MHz Band4

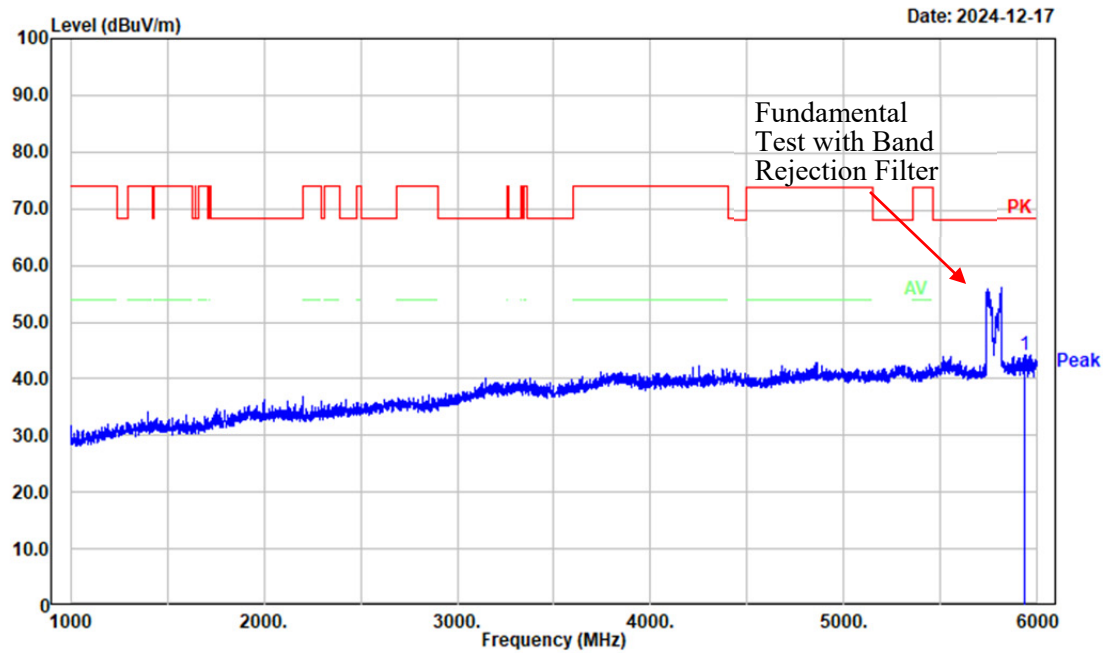


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5930.000	34.36	9.88	44.24	68.20	23.96	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec
Polarization: vertical
Note: 802.11ax80 Mode Middle Channel 5775MHz Band4

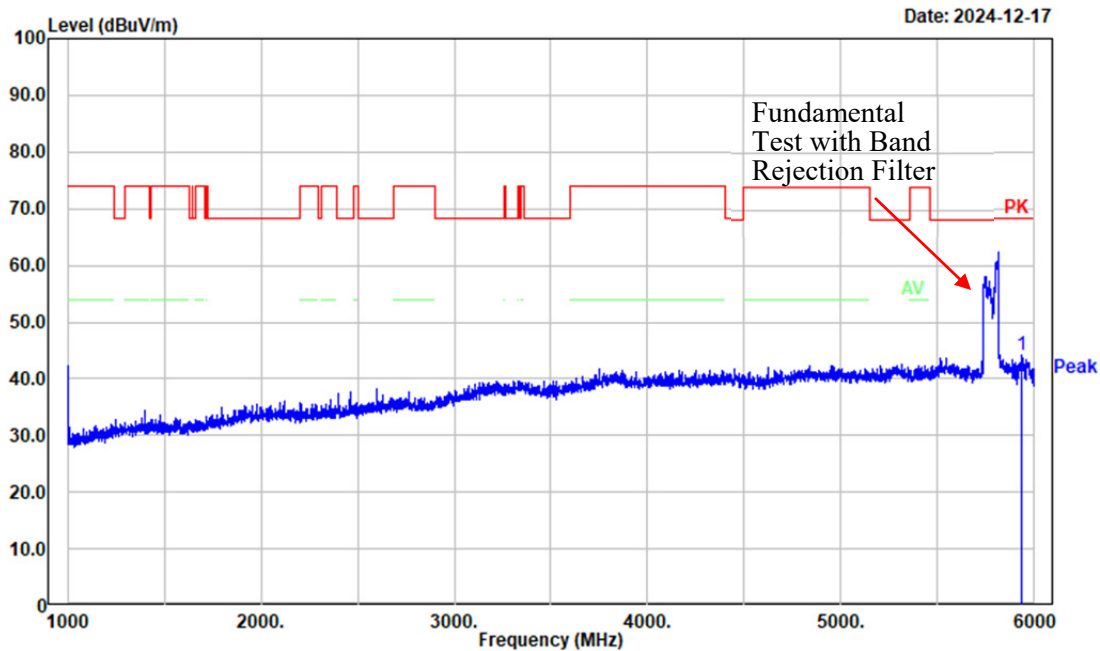


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5931.000	34.22	9.88	44.10	68.20	24.10	Peak

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: horizontal
Note: 802.11ax80 Mode Middle Channel 5775MHz Band4

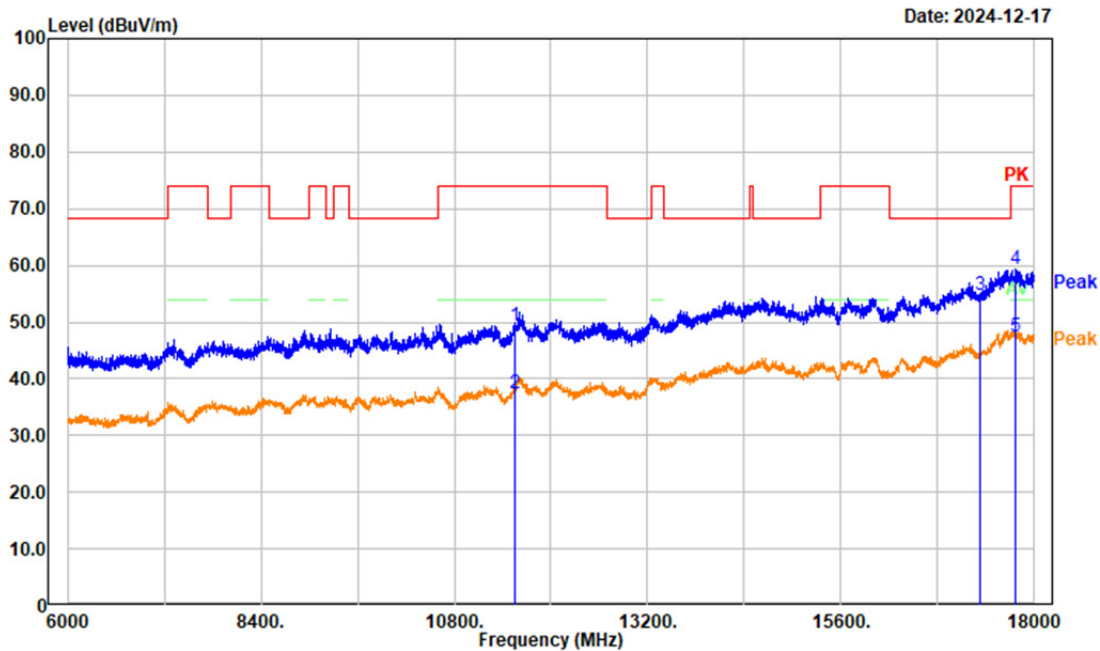

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	34.30	15.07	49.37	74.00	24.63	Peak
2	11550.000	22.25	15.07	37.32	54.00	16.68	Average
3	17325.000	33.36	21.27	54.63	68.20	13.57	Peak
4	17769.600	33.54	25.81	59.35	74.00	14.65	Peak
5	17769.600	21.67	25.81	47.48	54.00	6.52	Average

Project No.: 2403Z107562E-RF
Tester: Mack Huang
Condition: PK trace RBW:1MHz; VBW:3MHz; SWT:0.3sec AV trace RBW:1MHz; VBW:5kHz; SWT:auto
Polarization: vertical
Note: 802.11ax80 Mode Middle Channel 5775MHz Band4

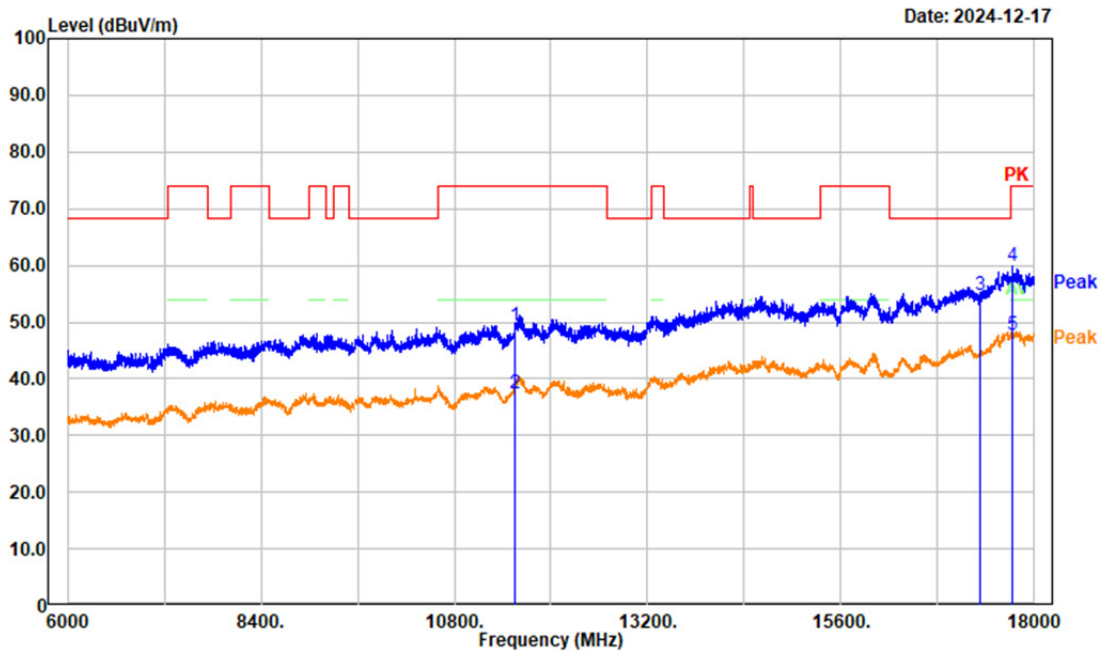

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11550.000	34.21	15.07	49.28	74.00	24.72	Peak
2	11550.000	22.40	15.07	37.47	54.00	16.53	Average
3	17325.000	33.42	21.27	54.69	68.20	13.51	Peak
4	17724.000	34.00	25.87	59.87	74.00	14.13	Peak
5	17724.000	21.72	25.87	47.59	54.00	6.41	Average

4.3 RF Conducted Data

Please refer to Annex "2403Z107562E-RF-00D_Appendix A" for detail test data.

5. EUT PHOTOGRAPHS

Please refer to the attachment 2403Z107562E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2403Z107562E-RF-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2403Z107562E-RF-00D-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====