



RF Test Report

For

Applicant Name:

Unify Data Technology LLC

Address:

1013 Centre Road, Suite 403S.2Wilmington, DE 19805, County of New Castle

EUT Name:

Desktop server

Brand Name:

UNIFYDRIVE

Model Number:

UP6

Series Model

UP6A, UP6S, UP6C, UP6 Pro, UP6 Max

Number:

2BGV2UP6

FCC ID:

Issued By

Company name:

BTF Testing Lab (Shenzhen) Co., Ltd.

Address:

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Report number:

BTF250527R00103

Test standards:

FCC CFR Title 47 Part 15 Subpart C (§15.247)

Test conclusion:

Pass

Date of sample receipt:

2025-02-28

Test date:

2025-03-03 to 2025-06-25

Date of issue:

2025-06-26

Test by:

Sean He

Sean He / Tester

Prepared by:

Chris Liu

Chris Liu/ Project engineer



Ryan.CJ /EMC manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.



Revision History		
Version	Issue Date	Revisions Content
R_V0	2025-06-26	Original

Note: Once the revision has been made, then previous versions reports are invalid.

Table of Contents

1	INTRODUCTION	5
1.1	Laboratory Location	5
1.2	Laboratory Facility	5
1.3	Announcement	5
2	PRODUCT INFORMATION.....	6
2.1	Application Information	6
2.2	Manufacturer Information.....	6
2.3	Factory Information	6
2.4	General Description of Equipment under Test (EUT)	6
2.5	Technical Information	6
3	SUMMARY OF TEST RESULTS	8
3.1	Test Standards.....	8
3.2	Uncertainty of Test.....	8
3.3	Summary of Test Result	8
4	TEST CONFIGURATION	9
4.1	Test Equipment List	9
4.2	Test Auxiliary Equipment	9
4.3	Test Modes.....	10
4.4	Test software	10
4.5	Test Setup Block	10
5	EVALUATION RESULTS (EVALUATION).....	12
5.1	Antenna requirement	12
5.1.1	Conclusion:.....	12
6	RADIO SPECTRUM MATTER TEST RESULTS (RF).....	13
6.1	Conducted Emission at AC power line	13
6.1.1	E.U.T. Operation:	13
6.1.2	Test Setup.....	14
6.1.3	Test Data:	14
6.2	Occupied Bandwidth	16
6.2.1	E.U.T. Operation:	16
6.2.2	Test Setup.....	16
6.2.3	Test Data:	16
6.3	Maximum Conducted Output Power	17
6.3.1	E.U.T. Operation:	17
6.3.2	Test Setup.....	17
6.3.3	Test Data:	17
6.4	Power Spectral Density	18
6.4.1	E.U.T. Operation:	18
6.4.2	Test Setup.....	18
6.4.3	Test Data:	18
6.5	Emissions in non-restricted frequency bands.....	19
6.5.1	E.U.T. Operation:	19
6.5.2	Test Setup.....	19
6.5.3	Test Data:	19
6.6	Band edge emissions (Radiated).....	20
6.6.1	E.U.T. Operation:	20
6.6.2	Test Setup.....	21
6.6.3	Test Data:	21

6.7 RADIATED EMISSIONS (below 1GHz)	25
6.7.1 E.U.T. Operation:	25
6.7.2 Test Setup.....	26
6.7.3 Test Data:	26
6.8 RADIATED EMISSIONS (above 1GHz).....	28
6.8.1 E.U.T. Operation:	28
6.8.2 Test Setup.....	29
6.8.3 Test Data:	29
7 TEST SETUP PHOTOS	30
8 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	30

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**

BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 518915.

- **CNAS - Registration No.: CNAS L17568**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.

- **A2LA - Registration No.: 6660.01**

BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 Product Information

2.1 Application Information

Company Name:	Unify Data Technology LLC
Address:	1013 Centre Road, Suite 403S.2Wilmington, DE 19805, County of New Castle

2.2 Manufacturer Information

Company Name:	Beijing Zentreadi Intelligence Information Technology Co.,Ltd
Address:	Room1109, 10th Floor, Building A, No.2 Zhongguancun South Street, Haidian District, Beijing

2.3 Factory Information

Company Name:	SHENZHEN XINWUJIE TECHNOLOGY CO.,LTD.
Address:	Floor 2&3, Building 2, Mobi Technology Building, Genyu Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen City, Guangdong Province, P.R.China

2.4 General Description of Equipment under Test (EUT)

EUT name	Desktop server
Under test model name	UP6
Series model name	UP6A, UP6S, UP6C, UP6 Pro, UP6 Max
Description of model name differentiation	There is no difference except the name of the model
Hardware Version	I JK JBOX04_V0.3
Software Version	T6MTLJKJBOXV0707
Rating:	DC 19V from ADAPTER or DC 14.4V from recharge Li-ion battery

2.5 Technical Information

Operation frequency:	2412MHz ~ 2462MHz (for 802.11b/g/n-HT20) 2422MHz ~ 2452MHz (for 802.11n-HT40)
Channel numbers:	11 (for 802.11b/g/n-HT20) 7 (for 802.11n-HT40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	DSSS-DBPSK, DQPSK, CCK
Modulation technology: (IEEE 802.11g/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
ADAPTER	Manufacturer: Shenzhen Huntkey Electric Co., Ltd Model: HKA12019063-6BA INPUT: 100-240V ~ 60/50Hz, 2.0A OUTPUT: 19.0V= 6.32A, 120.08W
Max. conducted output power Power:	15.77dBm
Antenna type:	FPC Antenna
Antenna gain:	ANT1&ANT2 2.67dBi (declare by Applicant)
Antenna transmit mode:	MIMO (2TX, 2RX)

Channel List:**For 802.11b/g/n(HT20)**

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	--	--

For 802.11n(HT40)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
--	--	4	2427MHz	7	2442MHz	--	--
--	--	5	2432MHz	8	2447MHz	--	--
3	2422MHz	6	2437MHz	9	2452MHz		

3 Summary of Test Results

3.1 Test Standards

Identity	Document Title
FCC CFR Title 47 Part 15 Subpart C (§15.247)	Intentional Radiators - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10-2020	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of The FCC Rules

3.2 Uncertainty of Test

Measurement	Value
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Supply voltages	±3 %
Time	±5 %
Conducted Emission for LISN (9kHz ~ 150kHz)	±2.97 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Radiated Emission (30MHz ~ 1000MHz)	±4.80 dB
Radiated Emission (1GHz ~ 18GHz)	±4.82 dB

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
RADIATED EMISSIONS (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
RADIATED EMISSIONS (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d)	Pass

4 Test Configuration

4.1 Test Equipment List

Radiated test method					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2024/10/25	2025/10/24
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2024/10/25	2025/10/24
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2024/10/28	2025/10/27
Preamplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9744	00246	2024/09/24	2025/09/23
Horn Antenna (1GHz ~ 18GHz)	Schwarzbeck	BBHA9120D	2597	2024/10/30	2025/10/29
Horn Antenna (15GHz ~ 40GHz)	SCHWARZBECK	BBHA9170	1157	2024/10/24	2025/10/23
Preamplifier (1GHz ~ 40GHz)	TST Pass	LNA10180G45	246	2024/09/24	2025/09/23
Test Software	Frad	EZ_EMC	Version: FA-03A2 RE+		

Conducted Emission Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2024/10/25	2025/10/24
V-LISN	Schwarzbeck	NSLK 8127	01073	2024/10/25	2025/10/24
Coaxial Switcher	Schwarzbeck	CX210	CX210	2024/10/25	2025/10/24
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	2024/10/25	2025/10/24
Test Software	Frad	EZ_EMC	Version: EMC-CON 3A1.1+		

Conducted test method					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	Keysight	N9020A	MY50410020	2024/10/25	2025/10/24
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2024/10/25	2025/10/24
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2024/10/25	2025/10/24
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2024/10/25	2025/10/24
Temperature Humidity Chamber	ZZCKONG	ZZ-K02A	20210928007	2024/10/25	2025/10/24
DC Power Supply	Tongmen	etm-6050c	20211026123	2024/10/25	2025/10/24
RF Control Unit	Techy	TR1029-1	/	2024/10/25	2025/10/24
RF Sensor Unit	Techy	TR1029-2	/	2024/10/25	2025/10/24
Test Software	TST Pass	/	Version: 2.0		

4.2 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	ADAPTER	Shenzhen Huntkey Electric Co., Ltd	HKA12019063-6B A	N/A	N/A
N/A	N/A	N/A	N/A	N/A	N/A

4.3 Test Modes


No.	Test Modes	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode.
TM4	802.11n(HT40) mode	Keep the EUT in 802.11n(HT40) transmitting mode.

4.4 Test software


Test software:	DRTU	Version:	WTF 1.0.10
Power Class:	Default		

4.5 Test Setup Block



1) Conducted emission measurement:

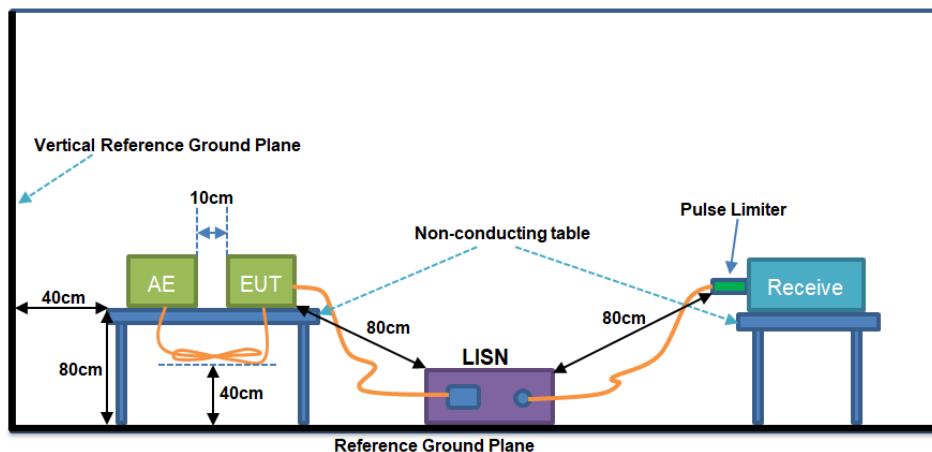

2) Conducted test method:

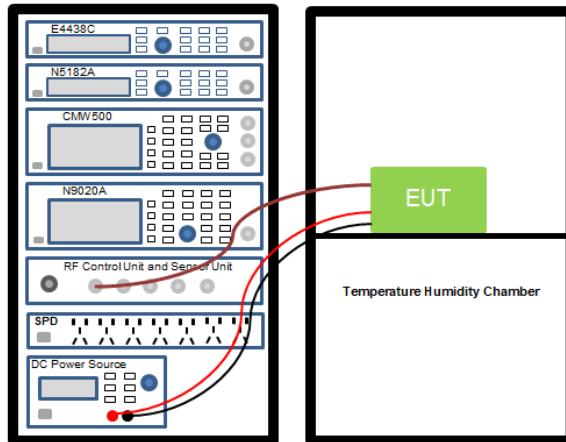

3) Radiated test method:

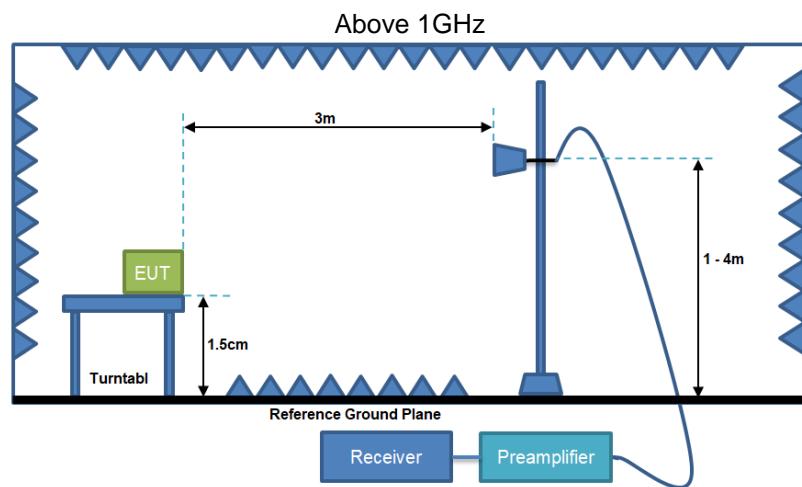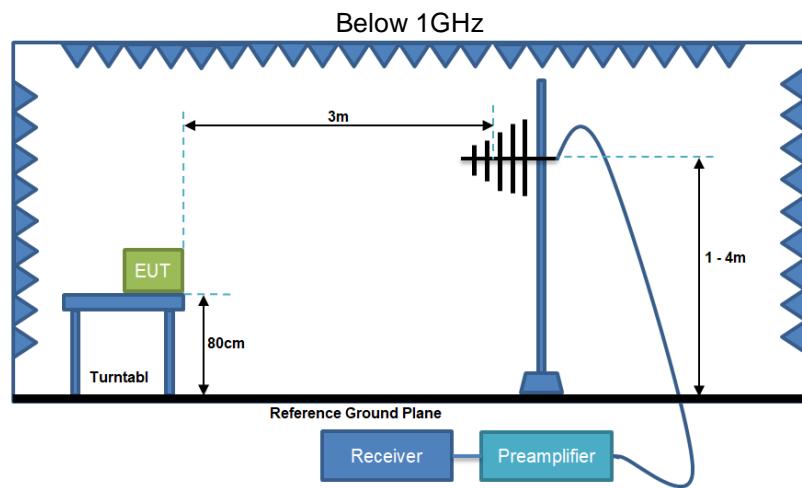


5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	--

5.1.1 Conclusion:

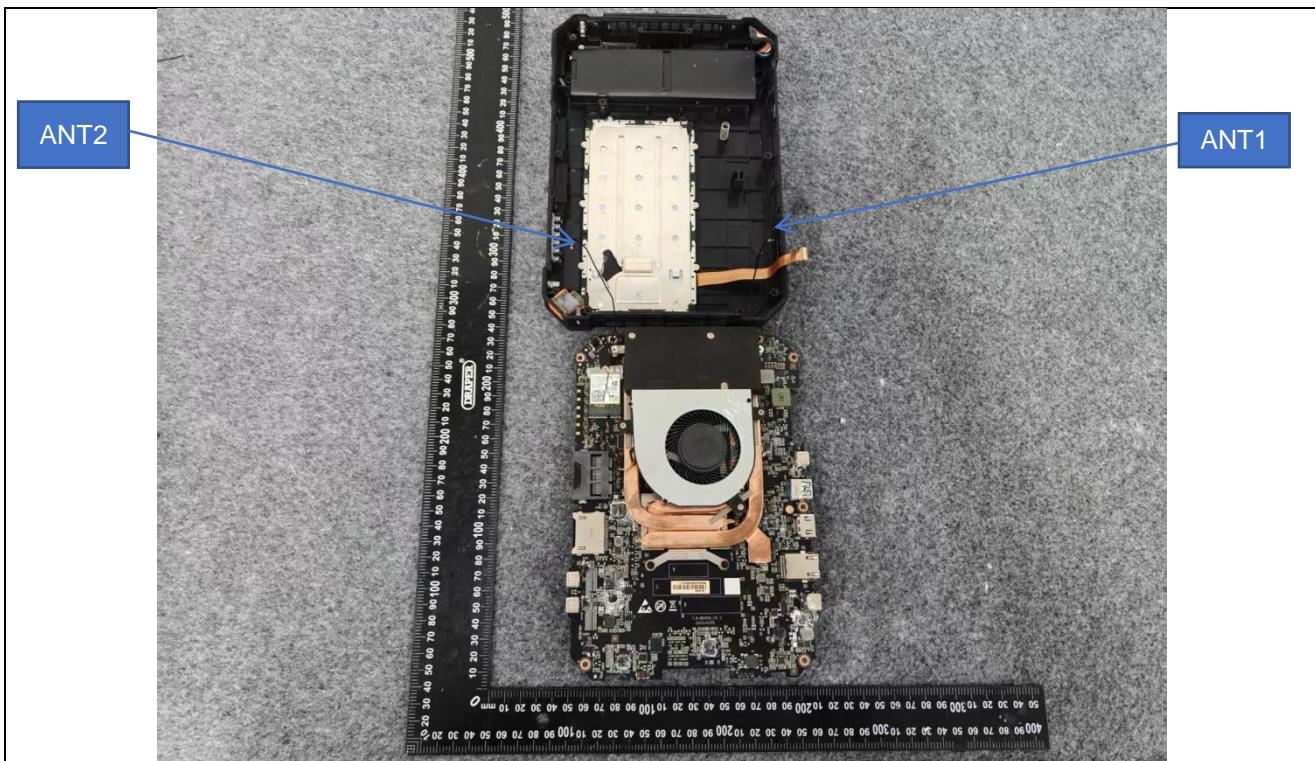

6 Radio Spectrum Matter Test Results (RF)

6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Method:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50

*Decreases with the logarithm of the frequency.

6.1.1 E.U.T. Operation:

Operating Environment:	
Temperature:	22.6 °C
Humidity:	54.8 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz


6.1.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos


6.1.3 Test Data:

TM3 / Line: Line / Band: 2.4G / BW: 20 / CH: M

All ANT mode had been tested, only show the MIMO(ANT1+ANT2) test data

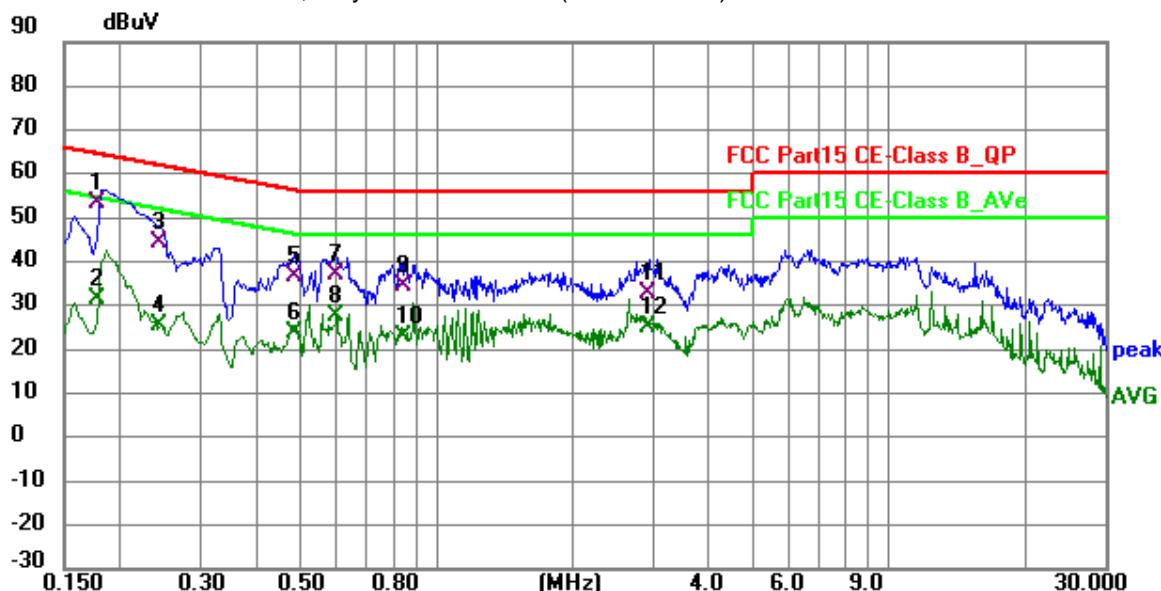

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1783	43.82	9.63	53.45	64.56	-11.11	QP	P	
2	0.1783	22.05	9.63	31.68	54.56	-22.88	AVG	P	
3	0.2426	34.58	9.63	44.21	62.01	-17.80	QP	P	
4	0.2426	15.80	9.63	25.43	52.01	-26.58	AVG	P	
5	0.4855	26.81	9.62	36.43	56.24	-19.81	QP	P	
6	0.4855	14.11	9.62	23.73	46.24	-22.51	AVG	P	
7	0.5964	27.56	9.62	37.18	56.00	-18.82	QP	P	
8	0.5964	18.11	9.62	27.73	46.00	-18.27	AVG	P	
9	0.8434	24.85	9.63	34.48	56.00	-21.52	QP	P	
10	0.8434	13.44	9.63	23.07	46.00	-22.93	AVG	P	
11	2.9401	23.22	9.65	32.87	56.00	-23.13	QP	P	
12	2.9401	15.60	9.65	25.25	46.00	-20.75	AVG	P	

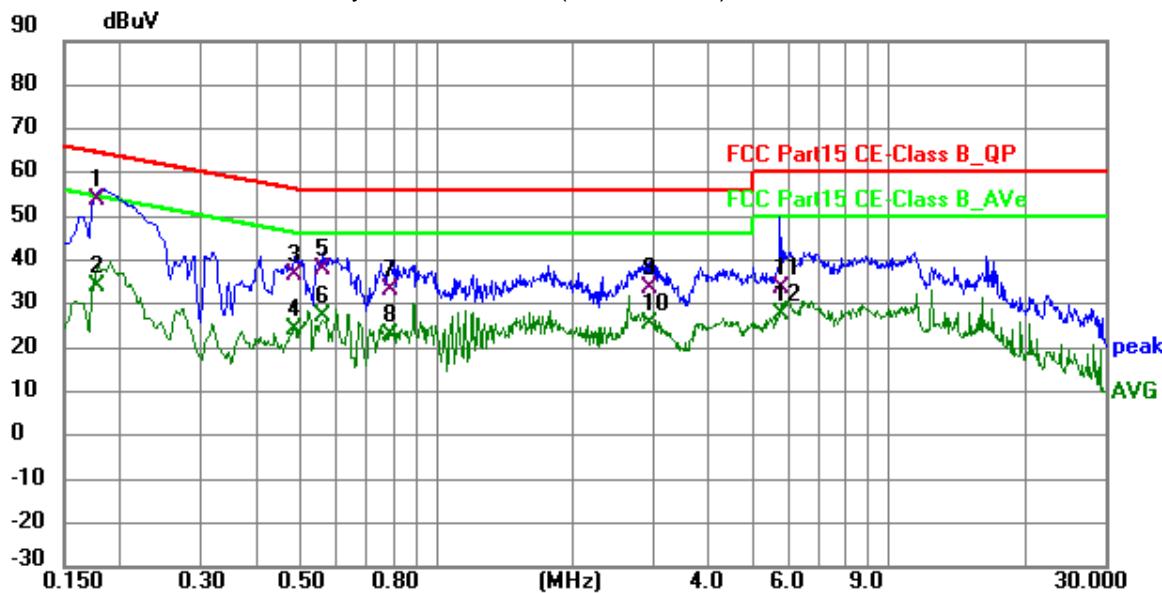TM3 / Line: Neutral / Band: 2.4G / BW: 20 / CH: M
All ANT mode had been tested, only show the MIMO(ANT1+ANT2) test data


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1785	44.31	9.63	53.94	64.56	-10.62	QP	P	
2	0.1785	24.41	9.63	34.04	54.56	-20.52	AVG	P	
3	0.4858	26.97	9.62	36.59	56.24	-19.65	QP	P	
4	0.4858	14.46	9.62	24.08	46.24	-22.16	AVG	P	
5	0.5606	28.37	9.62	37.99	56.00	-18.01	QP	P	
6	0.5606	17.41	9.62	27.03	46.00	-18.97	AVG	P	
7	0.7939	23.63	9.62	33.25	56.00	-22.75	QP	P	
8	0.7939	13.25	9.62	22.87	46.00	-23.13	AVG	P	
9	2.9541	23.93	9.65	33.58	56.00	-22.42	QP	P	
10	2.9541	15.93	9.65	25.58	46.00	-20.42	AVG	P	
11	5.7498	24.15	9.69	33.84	60.00	-26.16	QP	P	
12	5.7498	17.83	9.69	27.52	50.00	-22.48	AVG	P	

Note: Margin = Level - Limit = Reading + factor - Limit

6.2 Occupied Bandwidth

Test Requirement:	Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	DTS bandwidth
Test Limit:	Section (a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Procedure:	<p>a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.</p> <p>b) Set the VBW $\geq [3 \times \text{RBW}]$.</p> <p>c) Detector = peak.</p> <p>d) Trace mode = max hold.</p> <p>e) Sweep = auto couple.</p> <p>f) Allow the trace to stabilize.</p> <p>g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p> <p>b) Set resolution bandwidth (RBW)= 1-5 % of the emission bandwidth (EBW) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$ Detector = Peak. Trace mode =max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission, Compare the resultant bandwidth with the RBW setting of the analyzer, Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is 1-5 %.</p>

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.2.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.2.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.3 Maximum Conducted Output Power

Test Requirement:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	Maximum Average conducted output power
Test Limit:	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Procedure:	The EUT was directly connected to the tonsend test system and antenna output port as show in the block diagram below. The maximum conducted output power was performed in accordance with method 11.9.1.3(for Average power)of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.3.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.3.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.4 Power Spectral Density

Test Requirement:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	Maximum power spectral density level in the fundamental emission
Test Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa

6.4.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.4.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.5 Emissions in non-restricted frequency bands

Test Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	Emissions in nonrestricted frequency bands
Test Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Procedure:	ANSI C63.10-2020 Section 11.11.1, Section 11.11.2, Section 11.11.3

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	24.1 °C
Humidity:	53.5 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz

6.5.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.5.3 Test Data:

Please Refer to Appendix-2.4GWIFI for Details.

6.6 Band edge emissions (Radiated)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2020 section 6.10.5.2		

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz

6.6.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.6.3 Test Data:

All ANT mode had been tested, only show the ANT1 test data

Test Results				PASS				
Frequency Range				2310MHz~2410MHz				
Test Mode				TX B Mode Channel 01				
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	74.78	-21.47	53.31	74.00	-20.69	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	79.26	-26.12	53.14	74.00	-20.86	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
<hr/>								
1	2390	V	75.01	-21.47	53.54	74.00	-20.46	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	79.06	-26.12	52.94	74.00	-21.06	Peak
4	2400	V	--	-26.20	--	54.00	--	Avg
<hr/>								
Test Results				PASS				
Frequency Range				2450MHz~2550MHz				
Test Mode				TX B Mode Channel 11				
1	2483.5	H	78.49	-25.29	53.20	74.00	-20.80	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
<hr/>								
1	2483.5	V	78.80	-25.29	53.51	74.00	-20.49	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

All ANT mode had been tested, only show the ANT1 test data

Test Results				PASS				
Frequency Range				2310MHz~2410MHz				
Test Mode				TX G Mode Channel 01				
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	74.68	-21.47	53.21	74.00	-20.79	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	79.14	-26.12	53.02	74.00	-20.98	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	75.02	-21.47	53.55	74.00	-20.45	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	79.44	-26.12	53.32	74.00	-20.68	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results				PASS				
Frequency Range				2450MHz~2550MHz				
Test Mode				TX G Mode Channel 11				
1	2483.5	H	78.41	-25.29	53.12	74.00	-20.88	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	79.11	-25.29	53.82	74.00	-20.18	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg

Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.
 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.
 Result=Reading + Correct Factor.
 Margin= Result-Limit.
 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Results				PASS				
Frequency Range				2310MHz~2410MHz				
Test Mode				TX N(HT20) Mode Channel 01				
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.21	-21.47	53.74	74.00	-20.26	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	78.81	-26.12	52.69	74.00	-21.31	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
<hr/>								
1	2390	V	74.52	-21.47	53.05	74.00	-20.95	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.69	-26.12	52.57	74.00	-21.43	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
<hr/>								
Test Results				PASS				
Frequency Range				2450MHz~2550MHz				
Test Mode				TX N(HT20) Mode Channel 11				
1	2483.5	H	78.99	-25.29	53.70	74.00	-20.30	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
<hr/>								
1	2483.5	V	78.81	-25.29	53.52	74.00	-20.48	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results				PASS				
Frequency Range				2310MHz~2410MHz				
Test Mode				TX N(HT40) Mode Channel 03				
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.23	-21.47	53.76	74.00	-20.24	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	79.08	-26.12	52.96	74.00	-21.04	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
<hr/>								
1	2390	V	74.32	-21.47	52.85	74.00	-21.15	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	78.83	-26.12	52.71	74.00	-21.29	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
<hr/>								
Test Results				PASS				
Frequency Range				2450MHz~2550MHz				
Test Mode				TX N(HT40) Mode Channel 09				
1	2483.5	H	78.77	-25.29	53.48	74.00	-20.52	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
<hr/>								
1	2483.5	V	78.63	-25.29	53.34	74.00	-20.66	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

6.7 RADIATED EMISSIONS (below 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
Above 960	500		3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2020 section 6.6.4		

6.7.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz


6.7.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos


6.7.3 Test Data:

TM3 / Polarization: Horizontal / Band: 2.4G / BW: 20 / CH: M

All ANT mode had been tested, only show the MIMO(ANT1+ANT2) test data

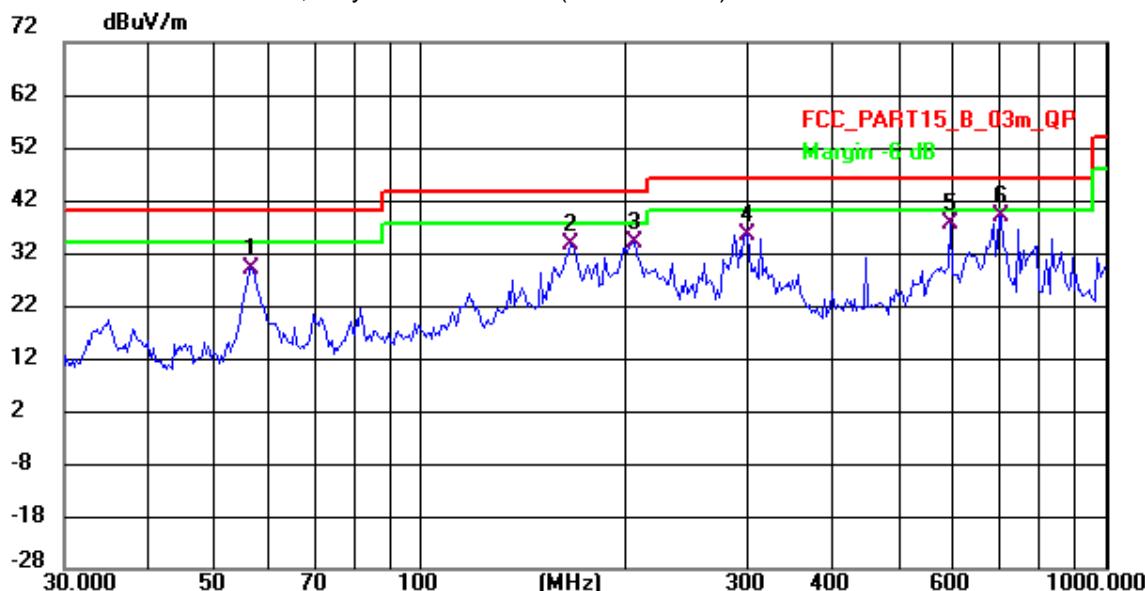

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	56.4662	51.47	-22.44	29.03	40.00	-10.97	QP	200	184	P	
2	165.4716	54.56	-20.88	33.68	43.50	-9.82	QP	100	225	P	
3	204.3052	58.77	-24.86	33.91	43.50	-9.59	QP	100	336	P	
4	298.5932	57.68	-22.26	35.42	46.00	-10.58	QP	100	286	P	
5	594.5143	51.46	-13.95	37.51	46.00	-8.49	QP	200	9	P	
6 *	703.7314	50.89	-12.10	38.79	46.00	-7.21	QP	200	184	P	

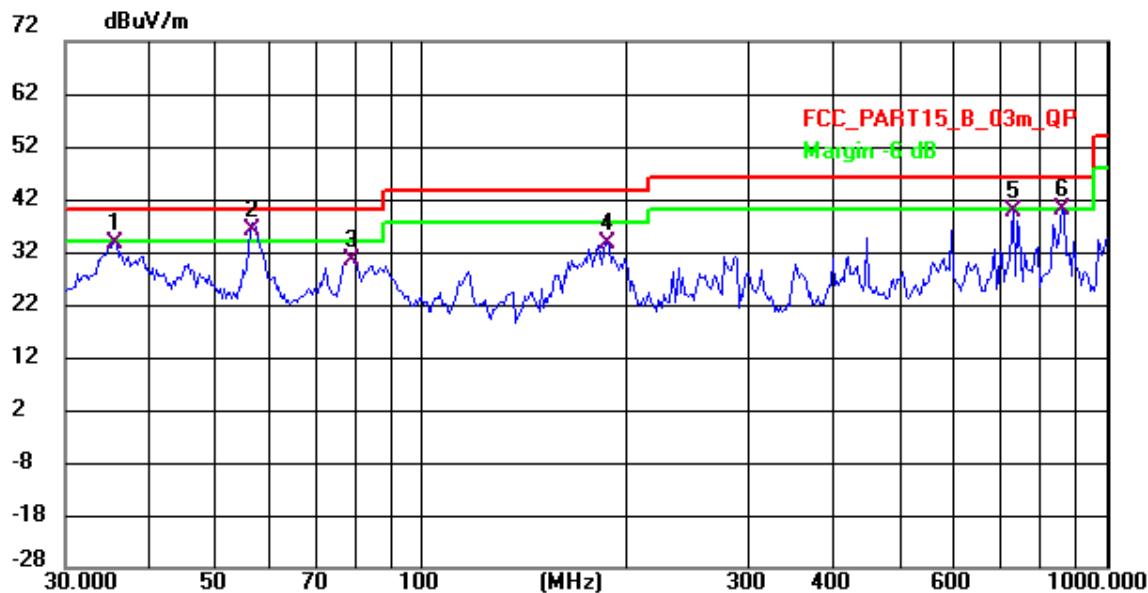TM3 / Polarization: Vertical / Band: 2.4G / BW: 20 / CH: M


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	35.5112	56.47	-22.86	33.61	40.00	-6.39	QP	100	294	P	
2 *	56.4662	58.69	-22.44	36.25	40.00	-3.75	QP	200	155	P	
3	78.5644	56.17	-25.61	30.56	40.00	-9.44	QP	100	146	P	
4	186.4682	57.19	-23.43	33.76	43.50	-9.74	QP	200	232	P	
5	728.8971	51.06	-11.23	39.83	46.00	-6.17	QP	100	35	P	
6 !	862.8015	49.15	-9.03	40.12	46.00	-5.88	QP	100	343	P	

Note: Margin=Level-Limit=Reading+factor-Limit

6.8 RADIATED EMISSIONS (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	Radiated emissions tests		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.			
Procedure:	ANSI C63.10-2020 section 6.6.4		

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	23.6 °C
Humidity:	45.3 %
Atmospheric Pressure:	1010 hpa
Test Voltage	AC 120V 60Hz

6.8.2 Test Setup

See section 4.5 for test setup description. The photo of test setup please refer to Appendix I Test Setup Photos

6.8.3 Test Data:

Remark: During the test, pre-scan 802.11b (ANT1, ANT2) , 802.11g (ANT1, ANT2) , 802.11n20 (ANT1, ANT2, MIMO(ANT1+ANT2)) , 802.11n40 (ANT1, ANT2, MIMO(ANT1+ANT2)) mode, also test the ANT1, ANT2, MIMO(ANT1+ANT2), found 802.11n20 MIMO(ANT1+ANT2) was the worst case mode. The report only reflects the test data of worst mode.

Test Mode: Channel 1 / 2412 MHz									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	52.59	V	34.02	10.36	34.26	62.71	74	-11.29	PK
4824	33.78	V	34.02	10.36	34.26	43.90	54	-10.10	AV
7236	/	/	/	/	/		/		/
9648	/	/	/	/	/		/		/
4804	53.27	H	34.02	10.36	34.26	63.39	74	-10.61	PK
4804	33.27	H	34.02	10.36	34.26	43.39	54	-10.61	AV
7236	/	/	/	/	/	/	/		/
9648	/	/	/	/	/	/	/		/
Test Mode: Channel 6 / 2437 MHz									
4874	53.29	V	34.69	10.51	34.97	63.52	74	-10.48	PK
4874	33.67	V	34.69	10.51	34.97	43.90	54	-10.10	AV
7311	/	/	/	/	/	/	/		/
9748	/	/	/	/	/	/	/		/
4874	52.80	H	34.69	10.51	34.97	63.03	74	-10.97	PK
4874	33.16	H	34.69	10.51	34.97	43.39	54	-10.61	AV
7311	/	/	/	/	/		/		/
9748	/	/	/	/	/		/		/

Test Mode: Channel 11 / 2462 MHz									
4924	50.22	V	35.01	11.52	34.25	62.50	74	-11.50	PK
4924	30.14	V	35.01	11.52	34.25	42.42	54	-11.58	AV
7386	/	/	/	/	/	/	/		/
9848	/	/	/	/	/	/	/		/
4924	50.68	H	35.01	11.52	34.25	62.96	74	-11.04	PK
7386	30.14	H	35.01	11.52	34.25	42.42	54	-11.58	AV
9848	/	/	/	/	/	/	/		/
9848	/	/	/	/	/	/	/		/

7 Test Setup Photos

Please refer to the Appendix I Test Setup Photos

8 EUT Constructional Details (EUT Photos)

Please refer to the Appendix II External Photos & Appendix III Internal Photos



Test Report Number: BTF250527R00103



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --