

Appendix Test Data for BLE (Conducted Measurement)

Product Name: INTELLIGENT SLEEP INSTRUMENT

Trade Mark: CKGO

Test Model: CKGO-A5

FCC ID: 2BGYC-CKGOA5

Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.720	2401.632	2402.352	0.5	PASS
BLE_1M	Ant1	2440	0.832	2439.580	2440.412	0.5	PASS
BLE_1M	Ant1	2480	0.700	2479.624	2480.324	0.5	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs





Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.1013	2401.4627	2402.5640	---	---
BLE_1M	Ant1	2440	1.0676	2439.4831	2440.5507	---	---
BLE_1M	Ant1	2480	1.0872	2479.4627	2480.5499	---	---

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs






Appendix C: Maximum peak conducted output power


Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.09	≤30	PASS
BLE_1M	Ant1	2440	1.38	≤30	PASS
BLE_1M	Ant1	2480	1.21	≤30	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs Peak

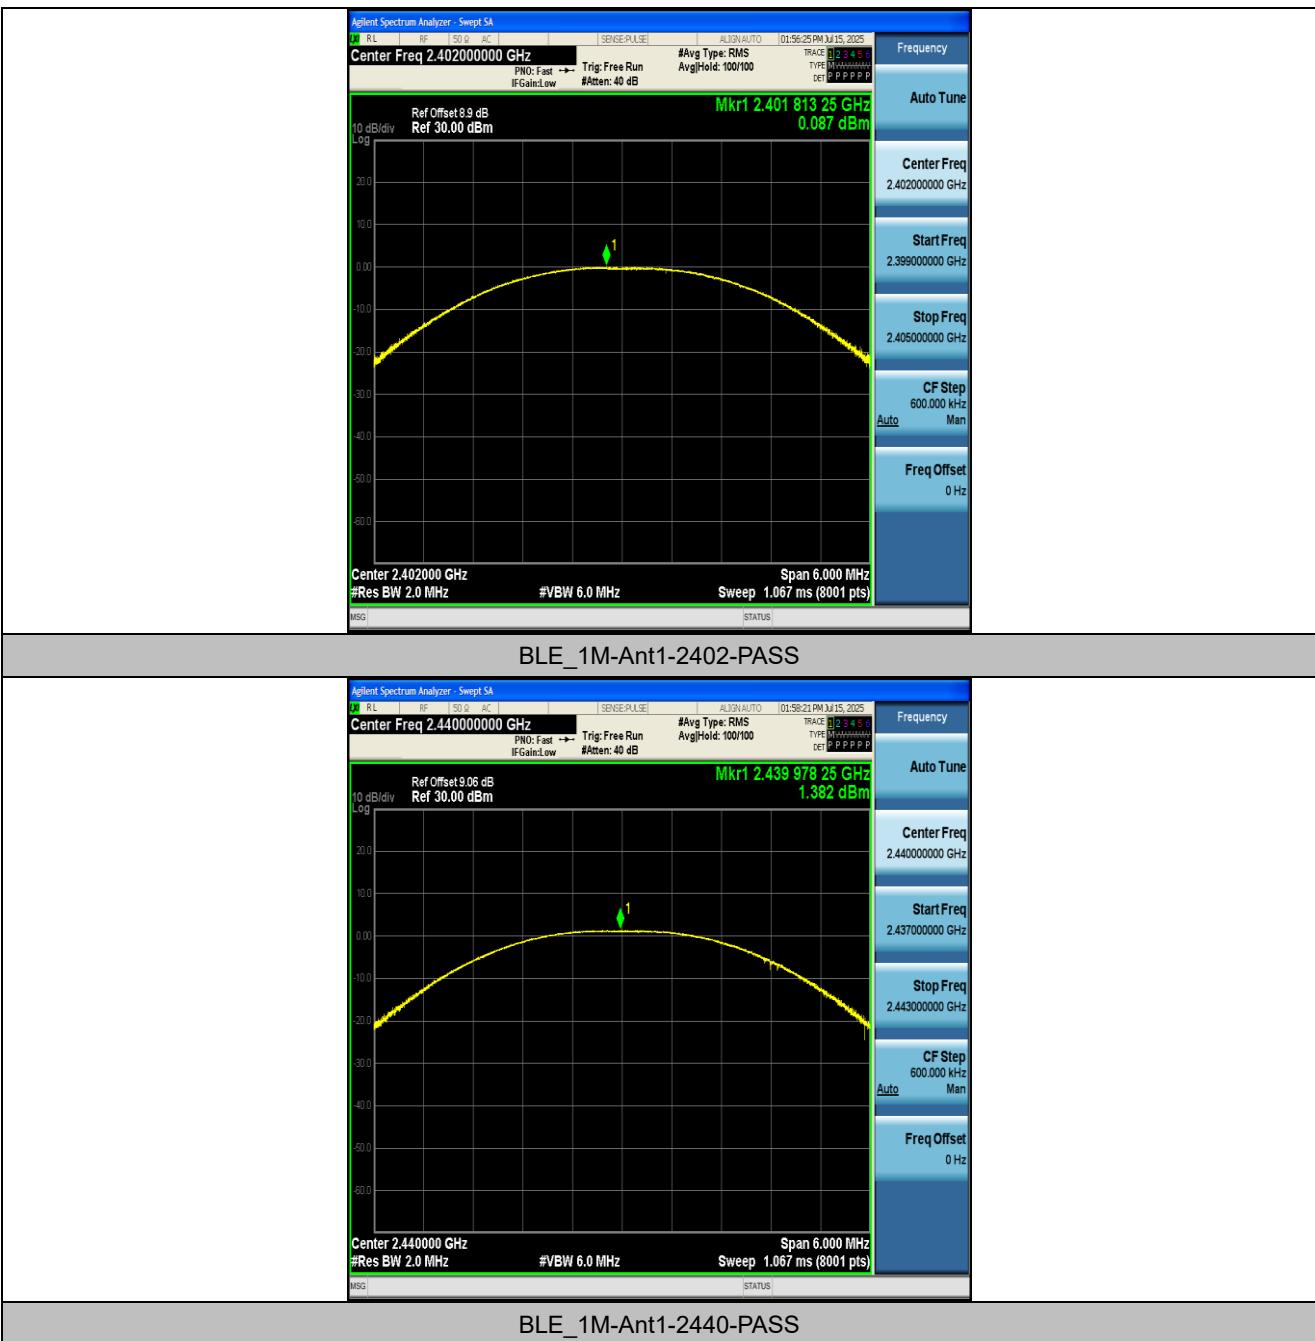

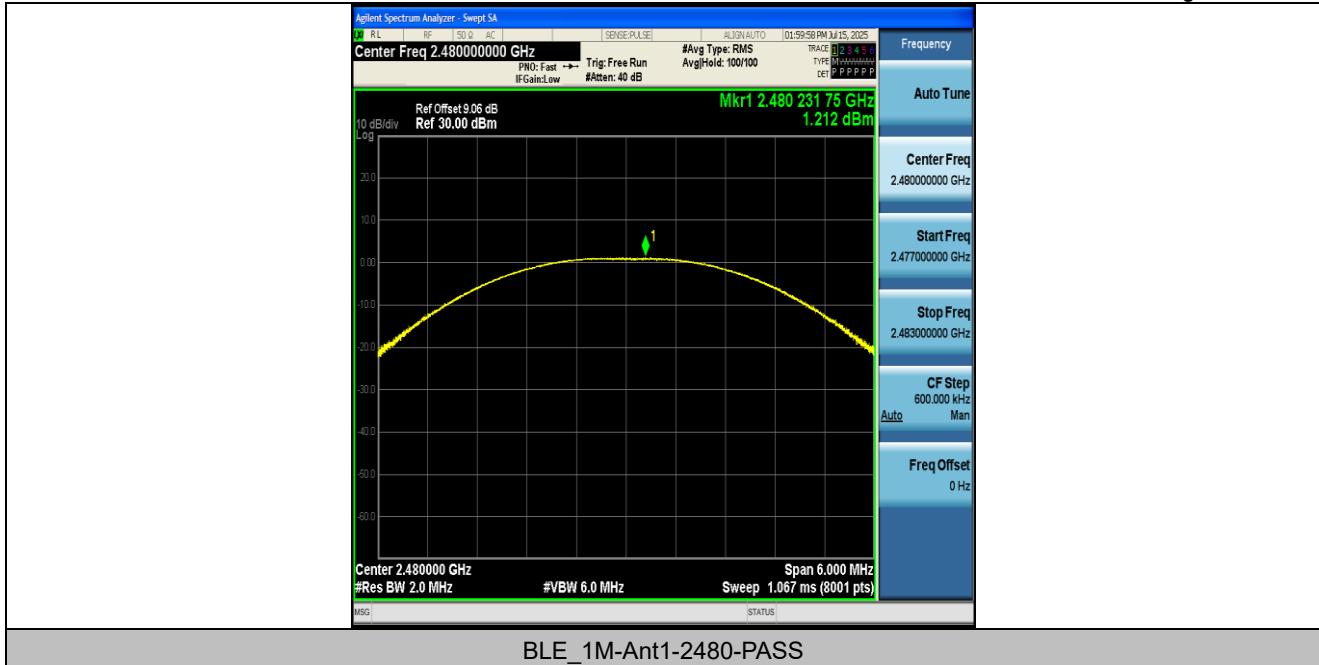


Appendix D: Maximum peak power spectral density


Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-11.19	≤8.00	PASS
BLE_1M	Ant1	2440	-9.83	≤8.00	PASS
BLE_1M	Ant1	2480	-9.95	≤8.00	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

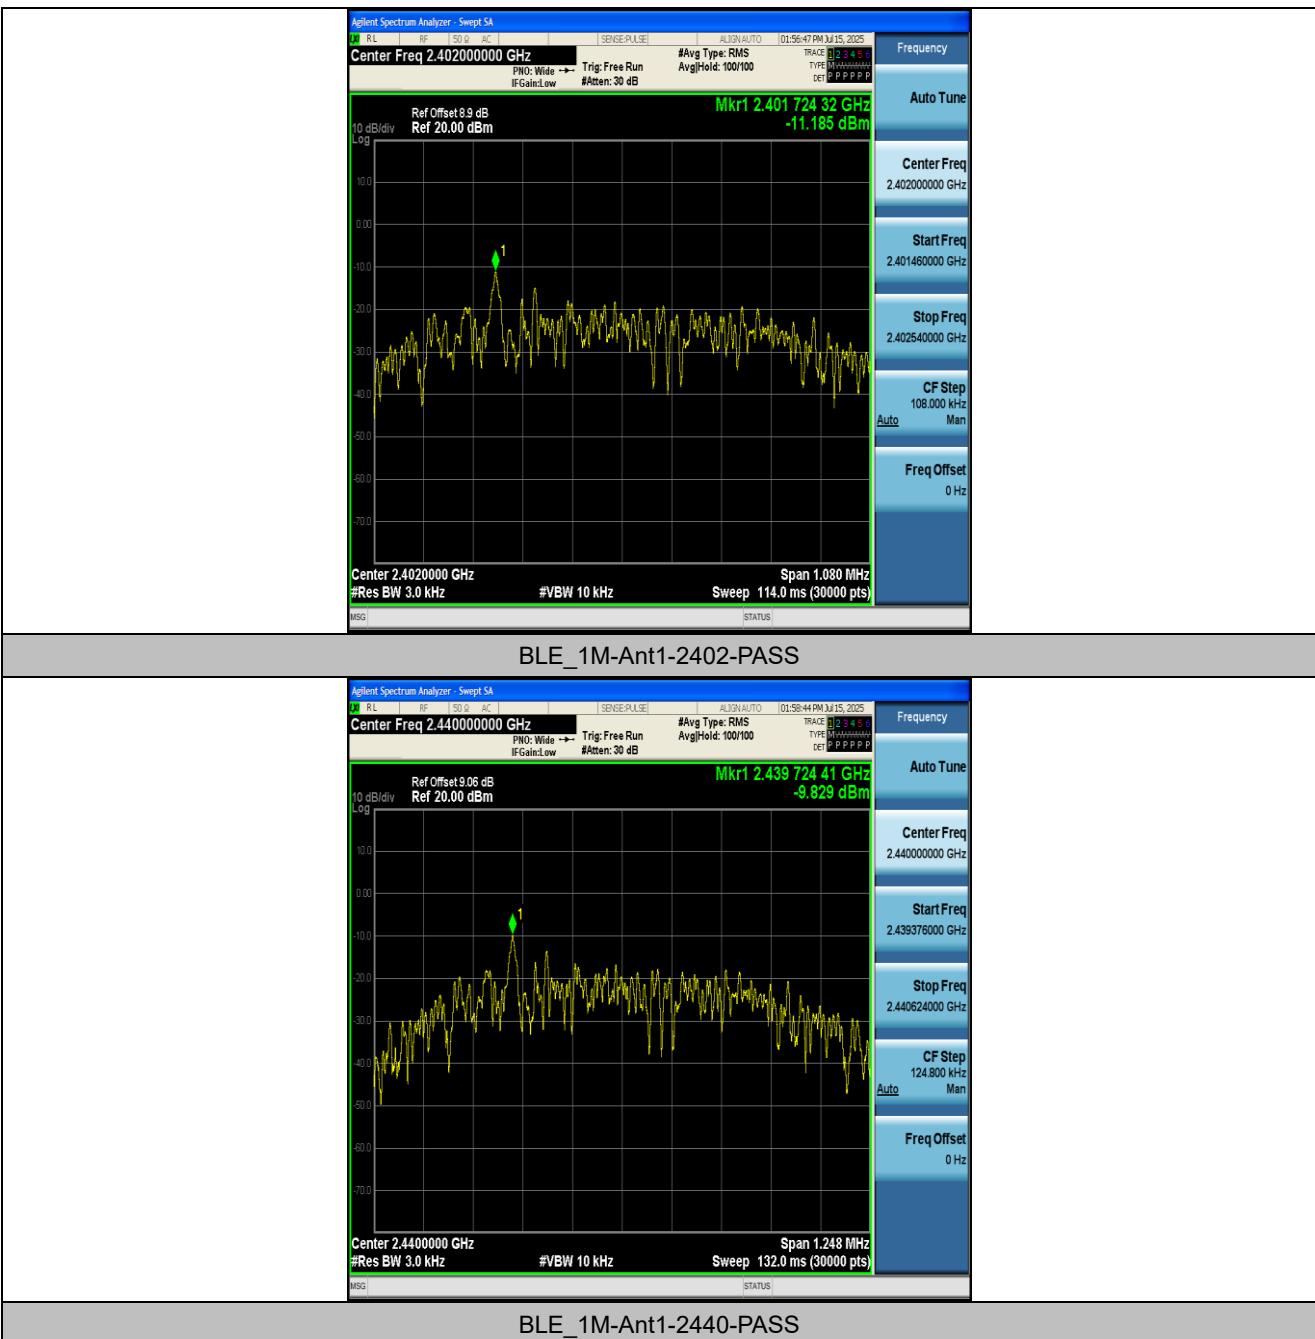

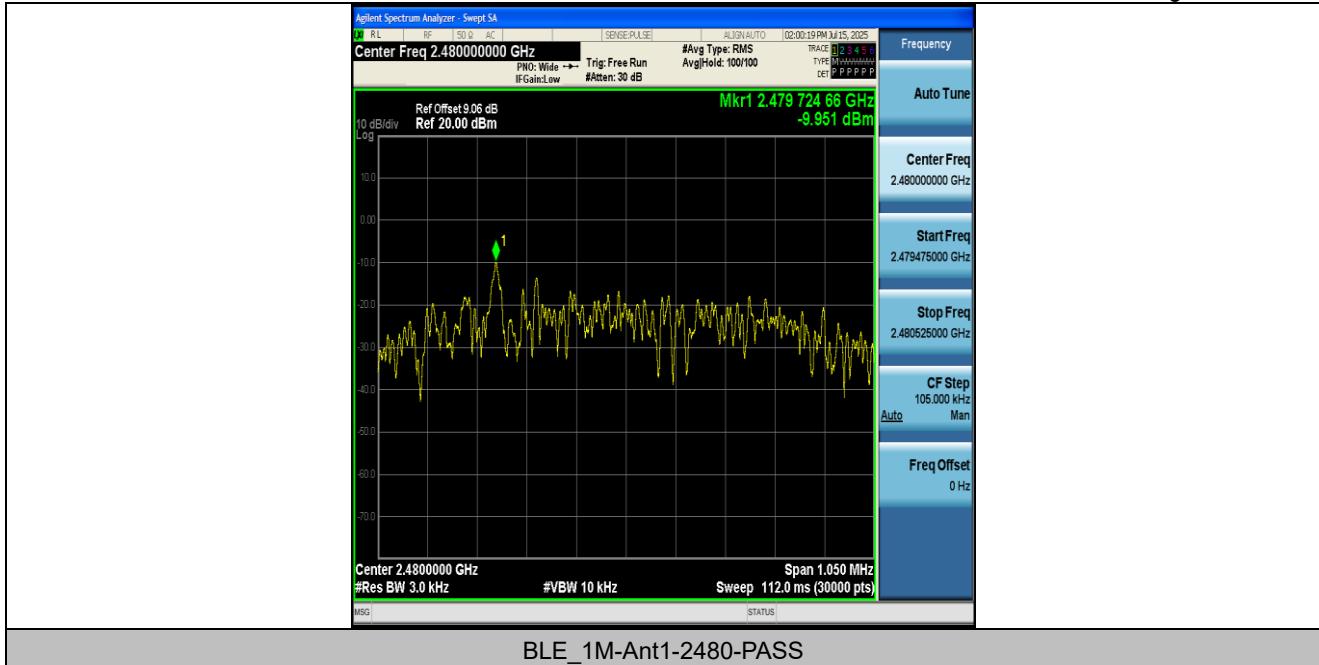


Appendix E: Band edge measurements

Test Result

Test Mode	Antenna	Ch. Name	Frequency [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.52	-49.59	≤-20.52	PASS
BLE_1M	Ant1	High	2480	0.86	-48.88	≤-19.14	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

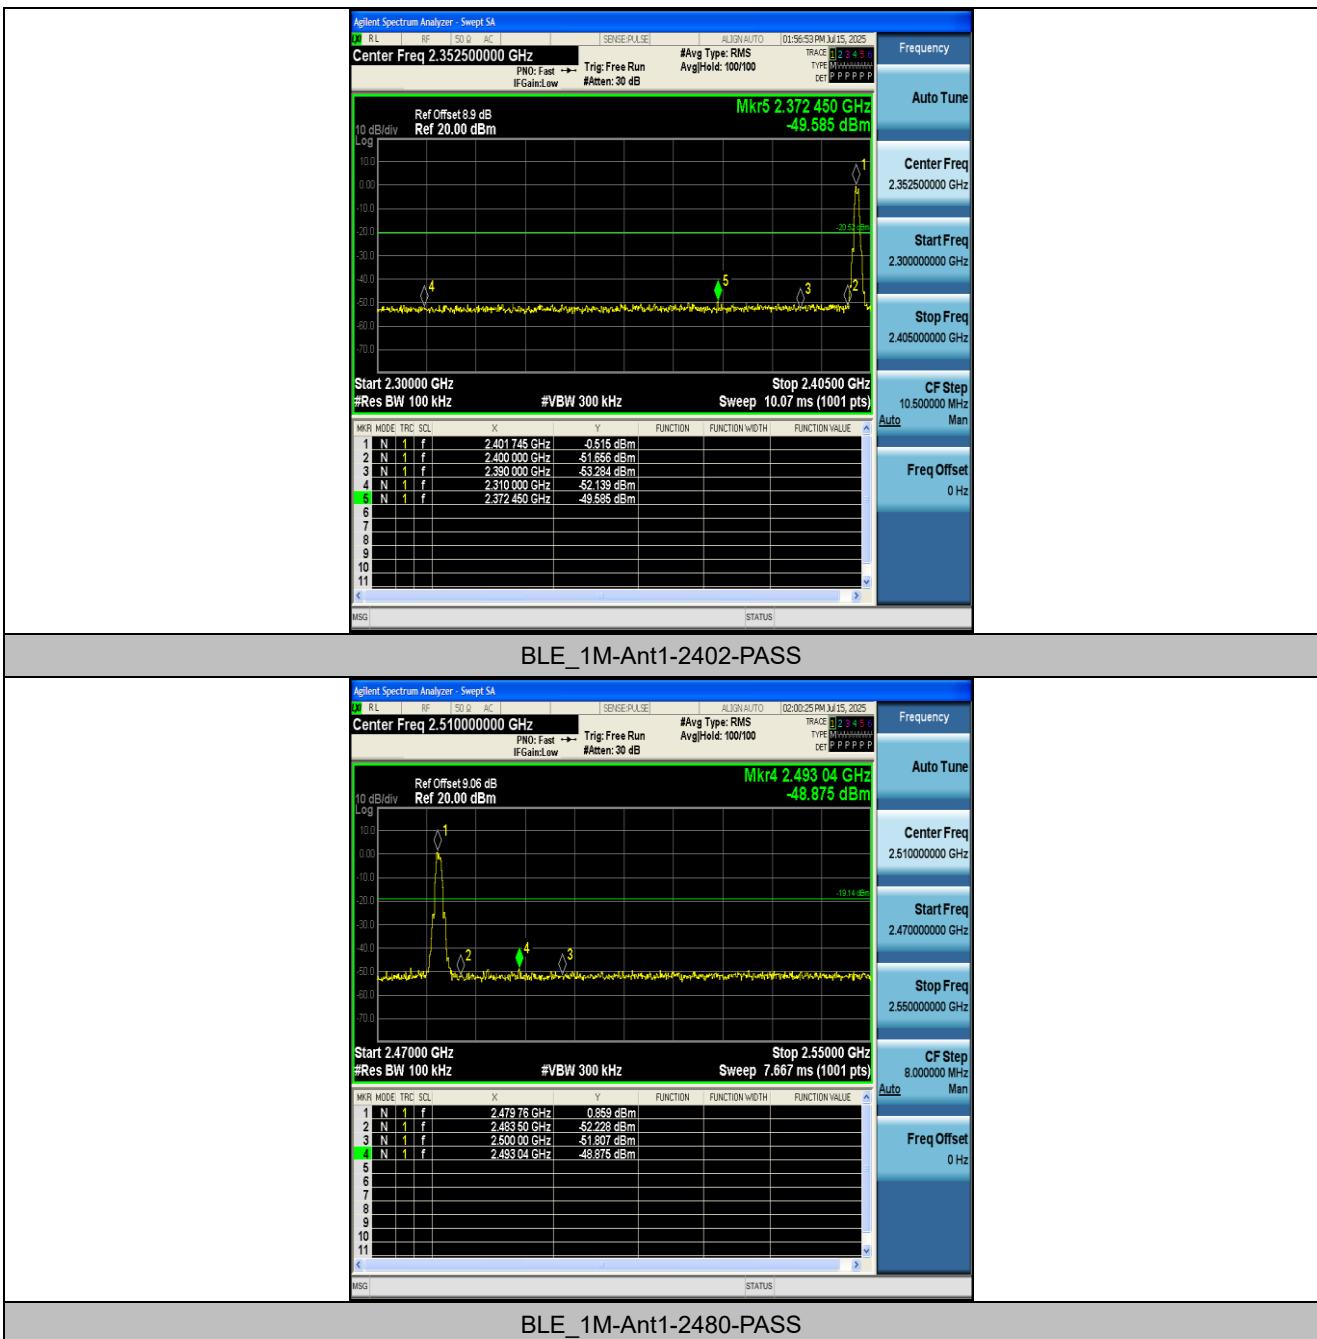

Appendix F: Conducted Spurious Emission

Test Result

Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	-0.52	-0.52	---	PASS
BLE_1M	Ant1	2402	30~1000	-0.52	-56.02	≤-20.52	PASS
BLE_1M	Ant1	2402	1000~26500	-0.52	-45.54	≤-20.52	PASS
BLE_1M	Ant1	2440	0~Reference	0.77	0.77	---	PASS
BLE_1M	Ant1	2440	30~1000	0.77	-57.58	≤-19.23	PASS
BLE_1M	Ant1	2440	1000~26500	0.77	-45.23	≤-19.23	PASS
BLE_1M	Ant1	2480	0~Reference	0.74	0.74	---	PASS
BLE_1M	Ant1	2480	30~1000	0.74	-58.73	≤-19.26	PASS
BLE_1M	Ant1	2480	1000~26500	0.74	-45.39	≤-19.26	PASS


Note:

offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.


Test Graphs





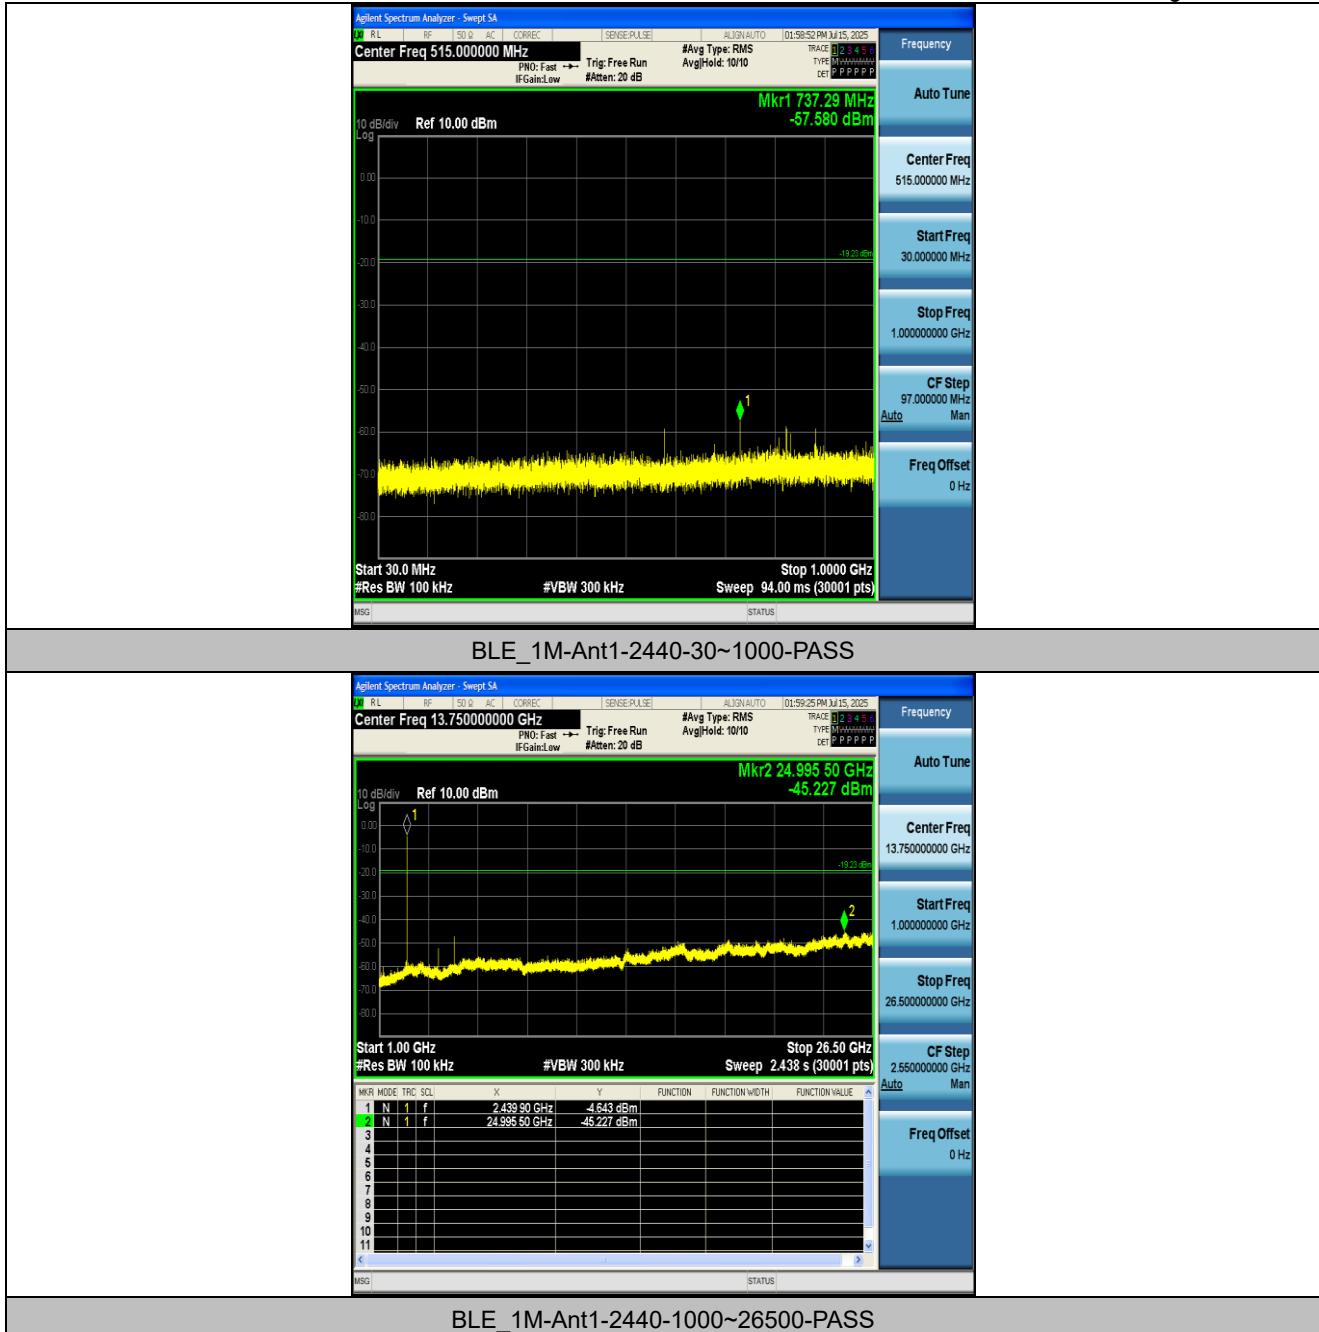



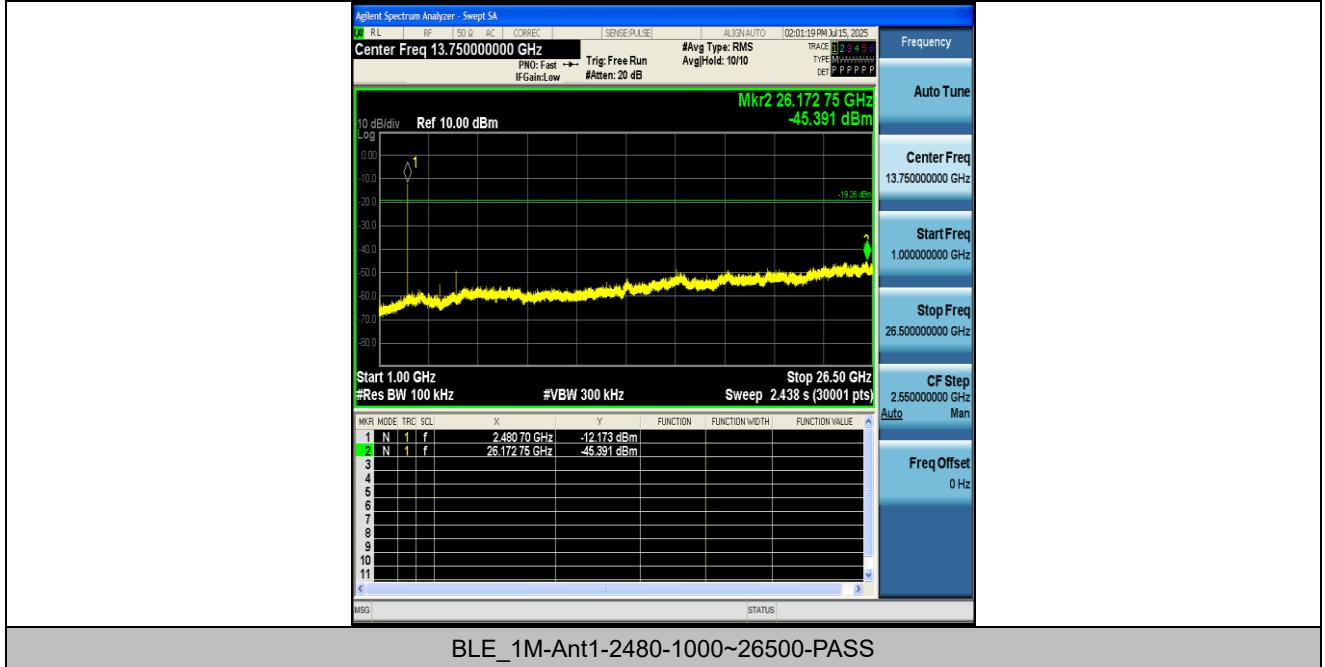


Appendix G: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
BLE_1M	Ant1	2402	0.28	1.25	22.40	6.50
BLE_1M	Ant1	2440	0.28	1.25	22.40	6.50
BLE_1M	Ant1	2480	0.28	1.25	22.40	6.50

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)

Test Graphs

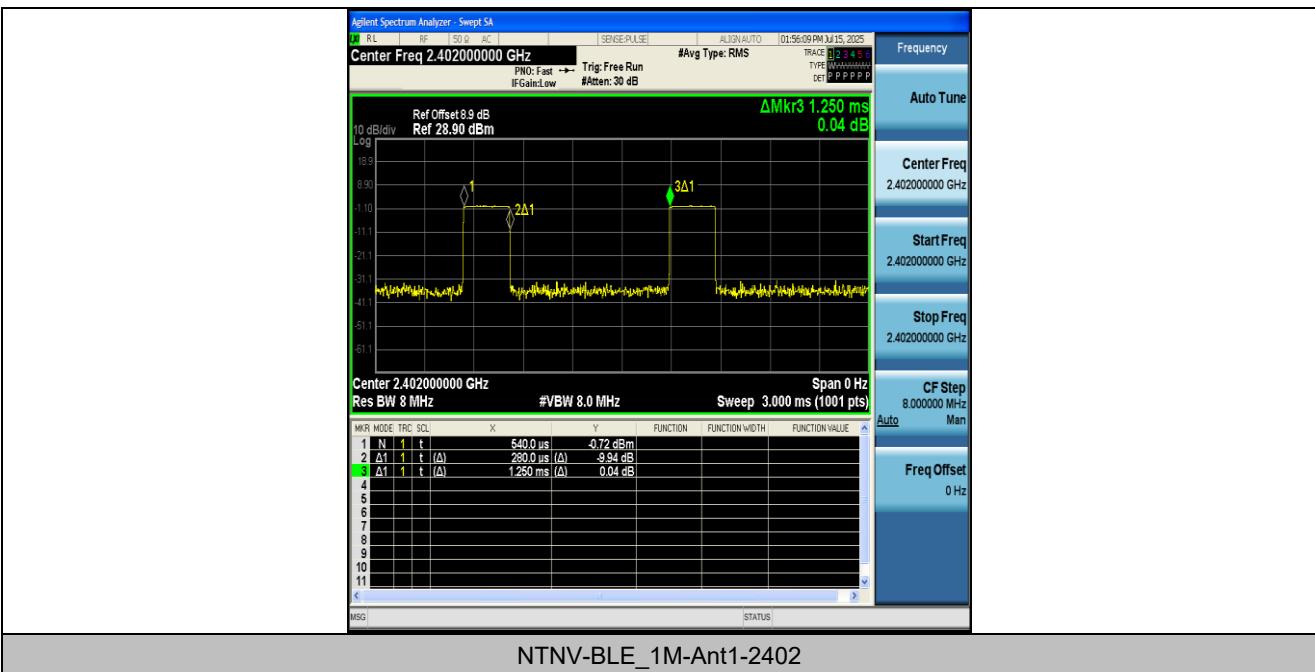

NTNV-BLE_1M-Ant1-2402

