

blafili 6dot35

Bluetooth Audio Receiver for Mixers & Active PA/DJ Systems


Features:

- 1/4" TRS output Bluetooth audio receiver for mixers and active PA speakers
- Connects smartphones & laptop to audio broadcast systems via Bluetooth to amplify music or other audio
- One blafili 6dot35 Bluetooth audio receiver for mono audio
- Two blafili 6dot35 units can be linked in order to receive a stereo signal
- Internal rechargeable battery provides 16 hours of operation
- USB Type-C port for charging via any 5V USB power source
- Stable connectivity over a 32.8 ft range (line-of-sight without obstacles). Gives you ample coverage for parties, events and weddings
- Support to connect any computer as a USB sound card

Specifications:

- Bluetooth profiles: 5.1, A2DP, AVRCP
- Supported Bluetooth Codecs: SBC, AAC, aptX, aptX LL, aptX HD
- Unbalanced Audio Output: 1/4" TRS male
- Audio Inputs: Bluetooth and USB-C
- 1/4" TRS Output level: 1.23V RMS
- Bluetooth range: Up to 32.8 feet (10 m)
- Frequency band: 2402 to 2480MHz
- USB charging: Type-C 5V, 500mA
- Rechargeable battery: Built-in lithium-ion 320mAh
- Battery life: Up to 16 hours
- Recharging time: Up to 2 hours
- A2DP frequency response: 20 Hz - 20 kHz (ref 1 kHz, ± 3 dB)
- USB DAC resolution: 16-bit / 48 kHz
- Dimensions: 135 x 30 x 25 mm
- Weight: 0.09 lbs / 40 g

Controls:

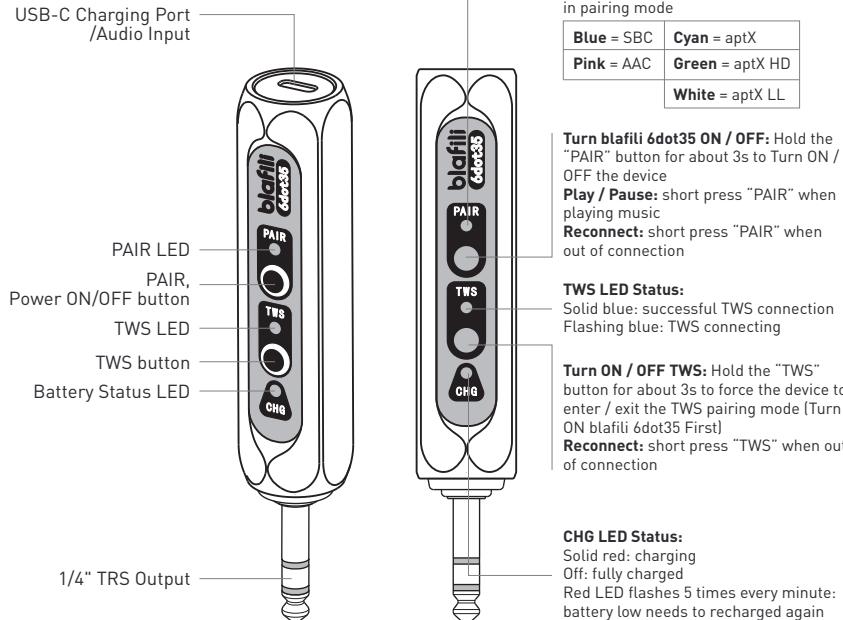

Note: blafili 6dot35 may not be fully charged upon purchase. While it is safe to use it right away, charging for 2 hours before initial use will ensure a full charge and the best performance.

Bluetooth Pairing a Single blaflili 6dot35:

1. Power on your Bluetooth device.
2. Press and hold the PAIR button for 3 seconds on blaflili 6dot35. The PAIR LED will flash blue and red alternately while blaflili 6dot35 is in pairing mode (**Time out: 2 minutes**).

Note: Double press PAIR button to enter pairing mode again.

Note: Before pairing, turn off Wi-Fi on your device and stop any audio playback.

3. Navigate to your Bluetooth device's setup screen, find "blaflili 6dot35" and click/connect.

4. When paired successfully, the PAIR LED will illuminate solid color:

Blue = SBC	Cyan = aptX	White = aptX LL
Pink = AAC	Green = aptX HD	

Note: If your Bluetooth device prompts for a pairing code, enter "0000".

5. Adjust the volume on your Bluetooth device or connected mixer/powered speaker.

To erase previous pairing settings, first turn on blaflili 6dot35, then hold the "PAIR" and "TWS" buttons until all the THREE lights(PAIR: White & TWS: Blue & CHG: Red) are lit indicating that pairing settings have been erased. You can now pair to a new device.


Stereo-Linking TWO blaflili 6dot35 Units:

1. Follow steps 1-5 in the **Bluetooth Pairing a Single blaflili 6dot35** section to connect the 1st unit of blaflili 6dot35, and follow step 2 to turn on the 2nd blaflili 6dot35.
2. Press and hold the TWS button for 3 seconds on the first blaflili 6dot35. Then press and hold the TWS button for 3 seconds on the secondary blaflili 6dot35.
3. Both blue TWS LEDs will blink while each blaflili 6dot35 searches for the other (**Time out: 2 minutes**).
4. When they are successfully linked, the blue TWS LEDs on both units will be lit solid.

Note: When two units are stereo-linked and connected to Bluetooth, the primary unit will send the left channel audio, and the secondary unit will send the right channel audio. If it is wrong, just exchange the position of the two blaflili 6dot35 units on your mixer.

When **TWO blaflili 6dot35 devices** are paired successfully, the PAIR LED of the primary blaflili XLR will illuminate solid color:

Blue = SBC	Cyan = aptX
------------	-------------



Front View

Perspective

blaflili

www.blaflili.com

Contact Email: michaelw@blaflili.com

FCC Caution.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.