



FCC Test Report

**Test Report
On Behalf of
Dongguan Luolian Electronics Technology Co.,Limited
For
Charging Dock for Meta Quest 3
Model No.: LL-QUCH-03A**

FCC ID: 2BH2E-LLQUCH03A

**Prepared For : Dongguan Luolian Electronics Technology Co.,Limited
NO1, Helong Road, Sha zone, ShaTou Village, Chang-An Town, DongGuan
City, GuangDong Province, 523850 China**

**Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

Date of Test: Jul. 12, 2024 ~ Jul. 29, 2024

Date of Report: Jul. 29, 2024

Report Number: HK2407123832-1E

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Test Result Certification

Applicant's Name : Dongguan Luolian Electronics Technology Co.,Limited

Address : NO1, Helong Road, Sha zone, ShaTou Village, Chang-An Town, DongGuan City, GuangDong Province, 523850 China

Manufacturer's Name : Dongguan Luolian Electronics Technology Co.,Limited

Address : NO1, Helong Road, Sha zone, ShaTou Village, Chang-An Town, DongGuan City, GuangDong Province, 523850 China

Product Description

Trade Mark : N/A

Product Name : Charging Dock for Meta Quest 3

Model and/or Type Reference: LL-QUCH-03A

Standards : FCC CFR 47 PART 18

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :

Date (s) of performance of tests : Jul. 12, 2024 ~ Jul. 29, 2024

Date of Issue : Jul. 29, 2024

Test Result : Pass

Testing Engineer : 

(Len Liao)

Technical Manager : 

(Sliver Wan)

Authorized
Signatory : 

(Jason Zhou)

**Table of Contents**

	Page
1 . Test Summary	5
1.1 . Test Procedures and Results	5
1.2 . Information of the Test Laboratory	5
1.3 . Measurement Uncertainty	5
2. General Information	6
2.1. General Description of EUT	6
2.2. Carrier Frequency of Channels	7
2.3. Test Mode	8
2.4. Description of Test Setup	9
2.5. Description of Support Units	10
2.6. Measurement Instruments List	11
3. Conducted Emission Test	12
3.1. Block Diagram of Test Setup	12
3.2. Conducted Power Line Emission Limit	12
3.3. Test Procedure	12
4. Radiated Emissions	15
4.1. Block Diagram of Test Setup	15
4.2. Rules and Specifications	16
4.3. Test Procedure	16
4.4. Test Result	16
5. Antenna Requirement	20
6. Photographs of Test	21
7. Photos of the EUT	23

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Jul. 29, 2024	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



1. Test Summary

1.1. Test Procedures and Results

Description of Test	Section Number	Result
Conducted Emissions Test	18.307	COMPLIANT
Radiated Emission Test	18.305	COMPLIANT

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CA100229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.3. Measurement Uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.71dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.28dB, k=2



2. General Information

2.1. General Description of EUT

Equipment:	Charging Dock for Meta Quest 3
Model Name:	LL-QUCH-03A
Series Models:	N/A
Model Difference:	N/A
Trade Mark:	N/A
FCC ID:	2BH2E-LLQUCH03A
Antenna Type:	Coil Antenna
Operation Frequency:	112KHz~205KHz
Test Frequency:	Coil 1: 116KHz Coil 2: 119KHz
Modulation Type:	ASK
Power Source:	Input: DC5V/2A, 9V/2A Output: Charging Dock:5V/2A, 9V/2A Handle Charging:3W Handle Charging:3W
Power Rating:	Input: DC5V/2A, 9V/2A Output: Charging Dock:5V/2A, 9V/2A Handle Charging:3W Handle Charging:3W
Note: 1. The transfer system includes two coils, 2 coils can work individually or can work at the same time. All the situation has been tested, only the worst situation was recorded in the report. 2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 3. The test results in the report only apply to the tested sample.	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



2.2. Carrier Frequency of Channels

	Test Frequency
01	116KHz
02	119KHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



2.3. Test Mode

Test Item	Test Mode	Description
Radiated & Conducted Test Cases	Mode 1	AC/DC Adapter + EUT + Wireless load 1 (Full load) + Wireless load 2 (Full load)
	Mode 2	AC/DC Adapter + EUT + Wireless load 1 (Half load) + Wireless load 2 (Half load)
	Mode 3	AC/DC Adapter + EUT + Wireless load 1 (Null load) + Wireless load 2 (Null load)
	Mode 4	AC/DC Adapter + EUT + Wireless load 1 (Full load)
	Mode 5	AC/DC Adapter + EUT + Wireless load 1 (Half load)
	Mode 6	AC/DC Adapter + EUT + Wireless load 1 (Null load)
	Mode 7	AC/DC Adapter + EUT + Wireless load 2 (Full load)
	Mode 8	AC/DC Adapter + EUT + Wireless load 2 (Half load)
	Mode 9	AC/DC Adapter + EUT + Wireless load 2 (Null load)
	Mode 10	AC/DC Adapter + EUT (Null Load)

Note: 1. All modes and configurations above have been tested, Only the result of the worst case was recorded in the report.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode, including the load in vertical and horizontal positions.


3. The load comes from the customer's provision.

4. According to the manufacturer's design principle, the wireless charging power will reach its maximum when the client device's battery level is between 1% and 10%.



2.4. Description of Test Setup

Operation of EUT during Testing:

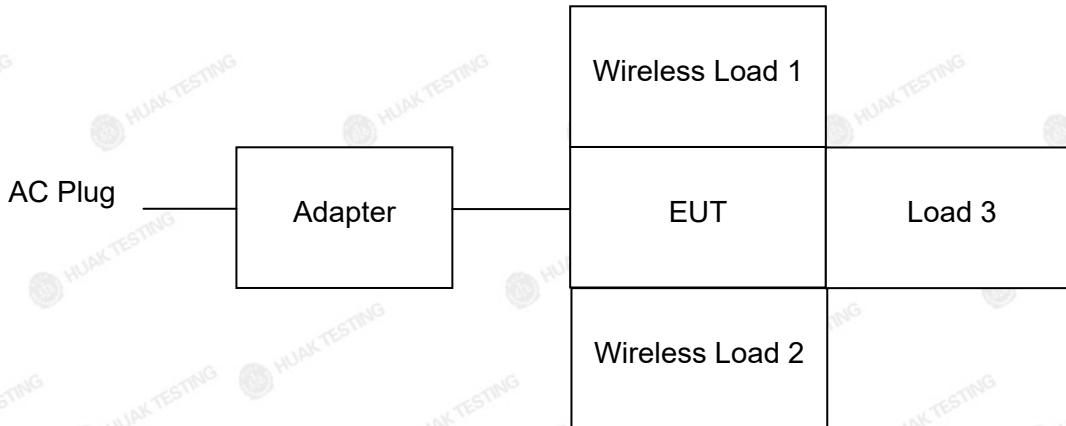

The sample was placed (0.8m (30MHz~1GHz), 0.8m (9KHz~30MHz)) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.5. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	Charging Dock for Meta Quest 3	N/A	LL-QUCH-03A	N/A	EUT
2	USB Cable	N/A	N/A	Length:1.51m	Accessory
3	Adapter	N/A	XY-PD20081-02	Input: 100-240V, 50/60Hz, 0.6A Output: 5V, 3A / 9V, 2.22A / 12V, 1.67A	Accessory
4	Wireless Load 1	N/A	N/A	Wireless input 3W	Accessory
5	Wireless Load 2	N/A	N/A	Wireless input 3W	Accessory
6	Load 3	N/A	N/A	N/A	Accessory

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



2.6. Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	HKE-002	Feb. 20, 2024	1 Year
2.	L.I.S.N.	R&S	ENV216	HKE-059	Feb. 20, 2024	1 Year
3.	EMI Test Receiver	R&S	ESR	HKE-005	Feb. 20, 2024	1 Year
4.	Spectrum analyzer	Agilent	N9020A	HKE-025	Feb. 20, 2024	1 Year
5.	Spectrum analyzer	R&S	FSV3044	HKE-126	Feb. 20, 2024	1 Year
6.	Preamplifier	EMCI	EMC051845 S	HKE-006	Feb. 20, 2024	1 Year
7.	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	Feb. 20, 2024	1 Year
8.	Preamplifier	A.H. Systems	SAS-574	HKE-182	Feb. 20, 2024	1 Year
9.	6dB Attenuator	Pasternack	6db	HKE-184	Feb. 20, 2024	1 Year
10.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 20, 2024	1 Year
11.	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	Feb. 21, 2024	2 Year
12.	Loop Antenna	COM-POWER	AL-130R	HKE-014	Feb. 21, 2024	2 Year
13.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 21, 2024	2 Year
14.	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15.	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16.	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 20, 2024	1 Year

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



3. Conducted Emission Test

3.1. Block Diagram of Test Setup

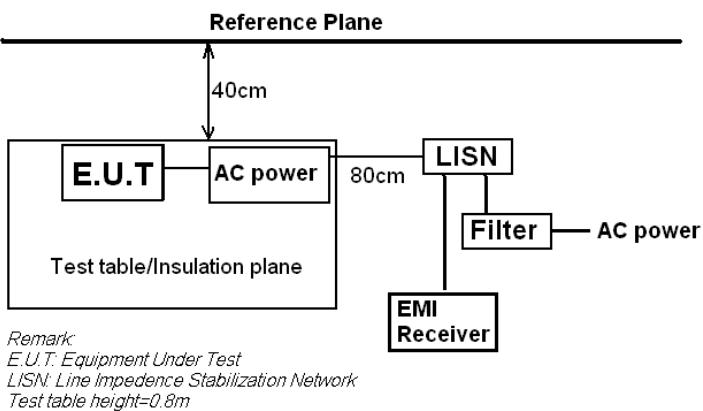

3.2. Conducted Power Line Emission Limit

According to FCC Part 18.307(b)

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §18.307 Line Conducted Emission Limit is same as above table.

3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.




3.4. Test Result

PASS

All the test modes completed for test. Only the worst result was reported as below:

Test Specification: Line

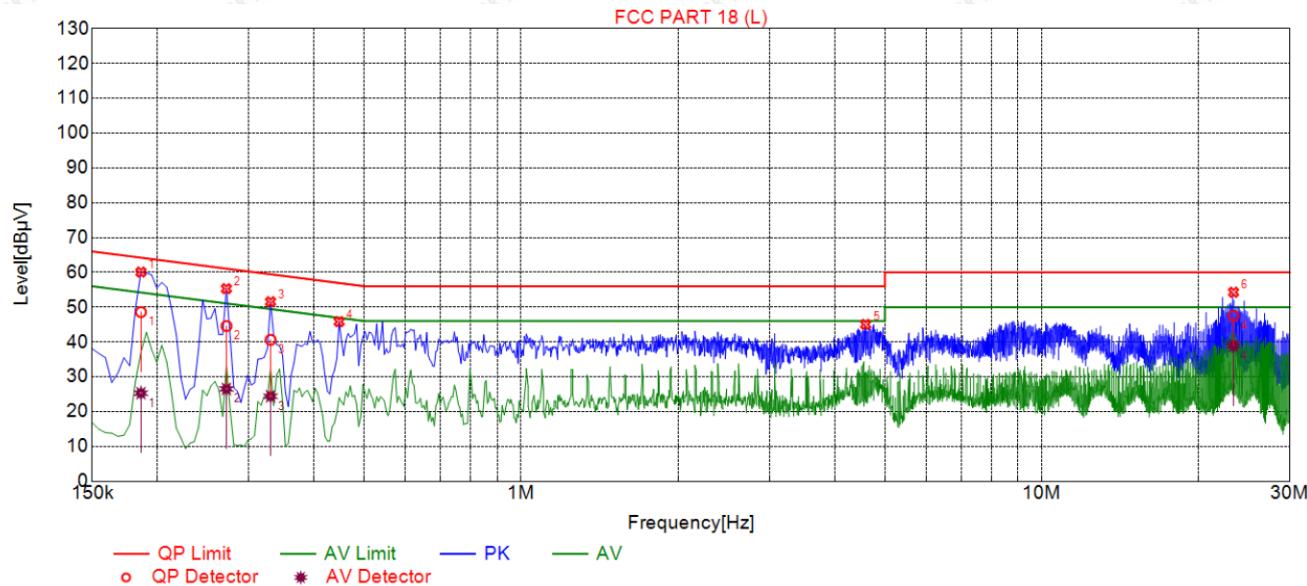

Suspected List

NO.	Freq. [MHz]	Level [dB μ V]	Factor [dB]	Limit [dB μ V]	Margin [dB]	Reading [dB μ V]	Detector	Type
1	0.1860	60.08	19.85	64.21	4.13	40.23	PK	L
2	0.2715	55.32	19.84	61.07	5.75	35.48	PK	L
3	0.3300	51.56	19.84	59.45	7.89	31.72	PK	L
4	0.4470	45.84	19.85	56.93	11.09	25.99	PK	L
5	4.5915	45.05	20.10	56.00	10.95	24.95	PK	L
6	23.3745	54.29	20.07	60.00	5.71	34.22	PK	L

Final Data List

NO.	Freq. [MHz]	Correction factor [dB]	QP Value [dB μ V]	QP Limit [dB μ V]	QP Margin [dB]	QP Reading [dB μ V]	AV Value [dB μ V]	AV Limit [dB μ V]	AV Margin [dB]	AV Reading [dB μ V]	Type
1	0.1860	19.85	48.58	64.21	15.63	28.73	25.29	54.21	28.92	5.44	L
2	0.2715	19.83	44.59	61.07	16.48	24.76	26.50	51.07	24.57	6.67	L
3	0.3300	19.84	40.62	59.45	18.83	20.78	24.40	49.45	25.05	4.56	L
4	23.3745	20.07	47.50	60.00	12.50	27.43	38.92	50.00	11.08	18.85	L

Remark: Margin = Limit – Level


Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

FCC PART 18 (N)

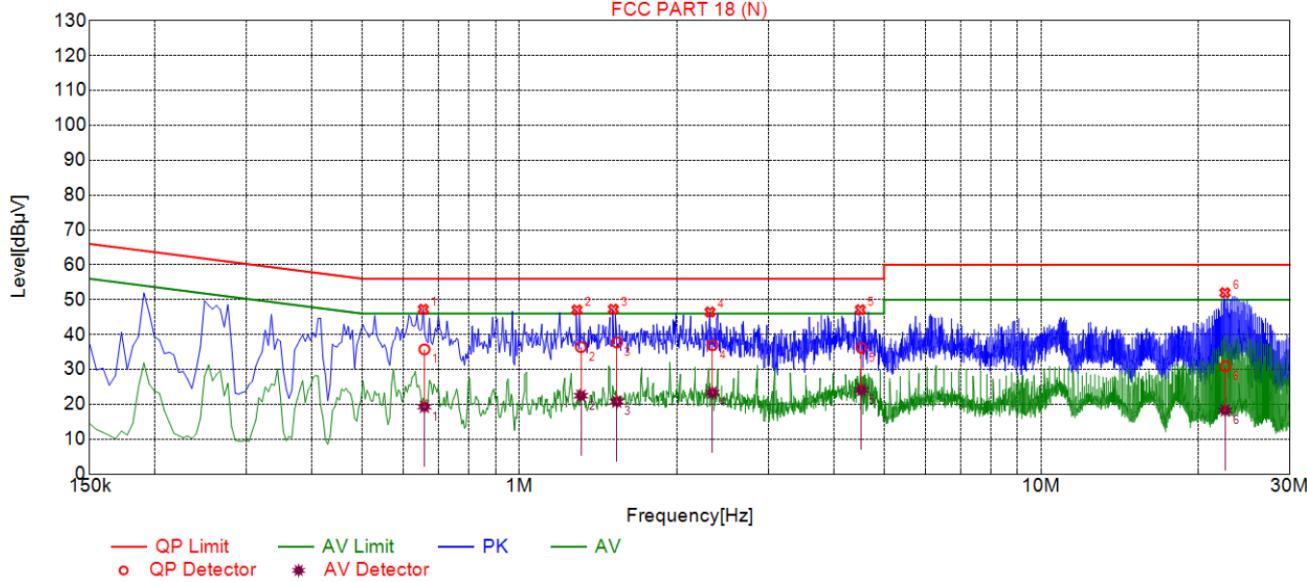

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.6540	47.25	19.74	56.00	8.75	27.51	PK	N
2	1.2885	47.08	19.78	56.00	8.92	27.30	PK	N
3	1.5135	47.26	19.79	56.00	8.74	27.47	PK	N
4	2.3190	46.47	19.88	56.00	9.53	26.59	PK	N
5	4.5015	47.12	19.98	56.00	8.88	27.14	PK	N
6	22.5195	52.00	20.11	60.00	8.00	31.89	PK	N

Final Data List

NO.	Freq. [MHz]	Correction factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	QP Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	AV Reading [dBμV]	Type
1	0.6572	19.74	35.76	56.00	20.24	16.02	19.29	46.00	26.71	-0.45	N
2	1.3117	19.78	36.41	56.00	19.59	16.63	22.47	46.00	23.53	2.69	N
3	1.5367	19.80	37.75	56.00	18.25	17.95	20.77	46.00	25.23	0.97	N
4	2.3422	19.88	36.97	56.00	19.03	17.09	23.35	46.00	22.65	3.47	N
5	4.5247	19.98	36.18	56.00	19.82	16.20	24.13	46.00	21.87	4.15	N
6	22.5427	20.11	30.94	60.00	29.06	10.83	18.26	50.00	31.74	-1.85	N

Remark: Margin = Limit – Level



Correction factor = Cable loss + LISN insertion loss

Level=Test receiver reading + correction factor



4. Radiated Emissions

4.1. Block Diagram of Test Setup

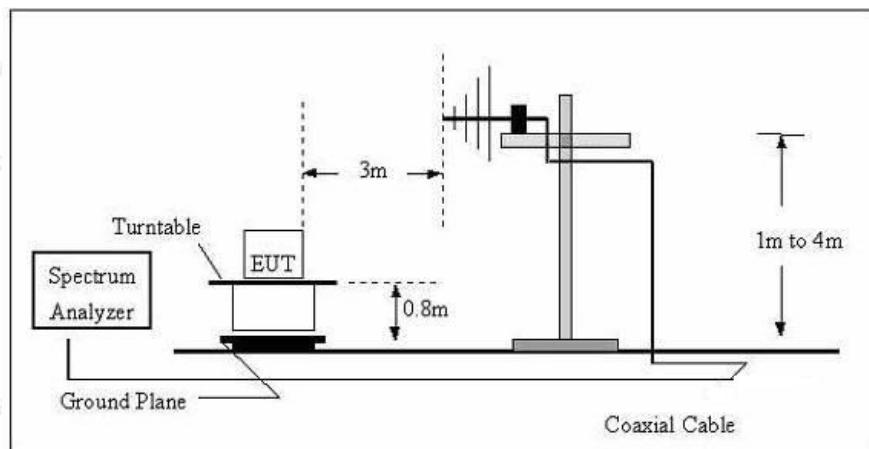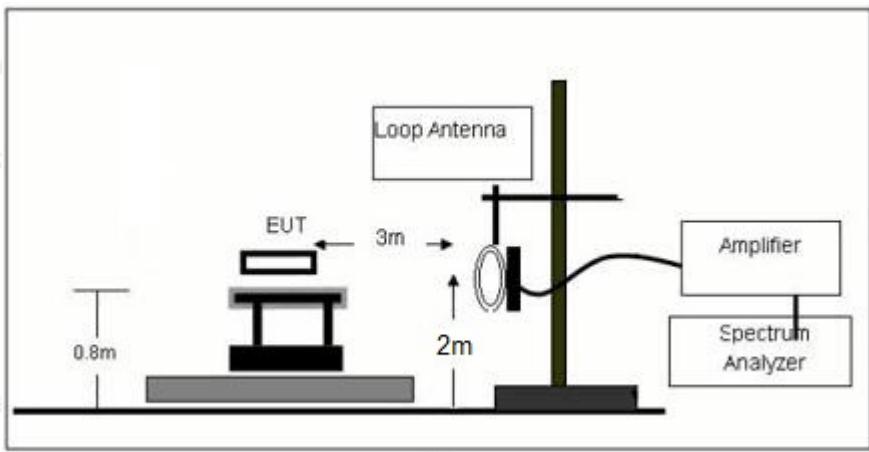

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4.2. Rules and Specifications

Except as provided elsewhere in this Subpart 18.305 (b), the field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following table:

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
(miscellaneous)				
	Any non-ISM frequency	Below 500 500 or more	15 15 × SQRT(power/500)	300 1300

Remark:

- (1) Emission level dBuV/m for 0.009~30MHz = $20\log(15) + 40\log(300/3)$ dBuV/m;
- (2) Calculated according FCC 18.305.
- (3) The smaller limit shall apply at the cross point between two frequency bands.
- (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3. Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurements are extrapolated to 300m and 30m distance respectively, by 40dB/decade, Per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.


4.4. Test Result

PASS



Coil 1+ Coil 2:

For 9KHz - 30MHz

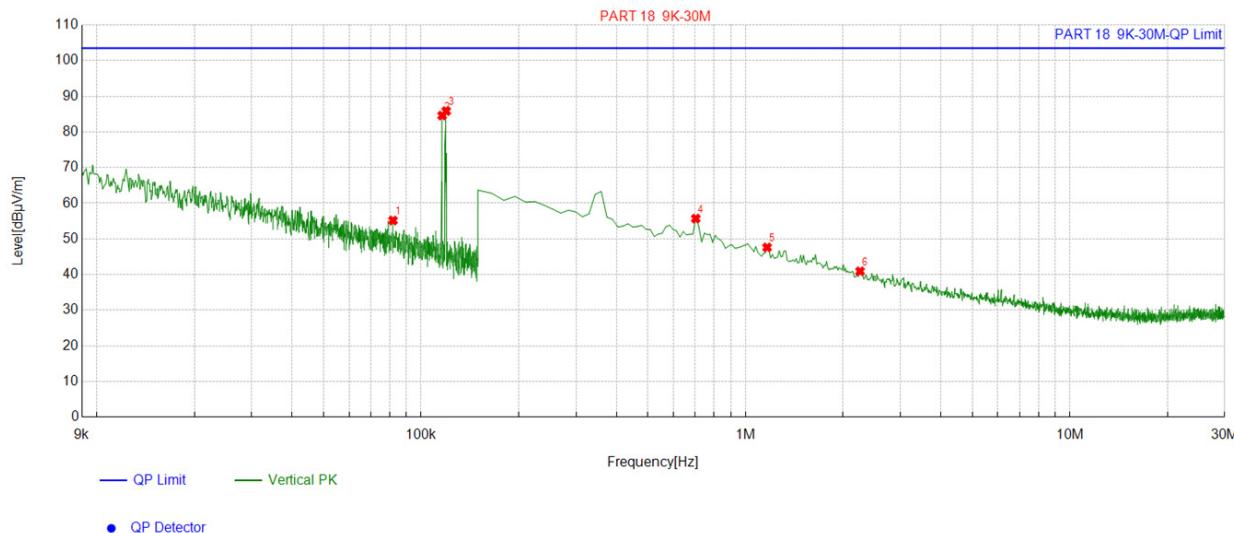

Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
1	0.081863	20.73	34.43	55.16	103.50	48.34
2	0.116073	20.39	64.20	84.59	103.50	18.91
3	0.119458	20.39	65.45	85.84	103.50	17.66
4	0.702501	20.25	35.45	55.70	103.50	47.80
5	1.165408	20.48	27.14	47.62	103.50	55.88
6	2.255478	20.43	20.49	40.92	103.50	62.58

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



For 30MHz-1GHz

Antenna polarity: H

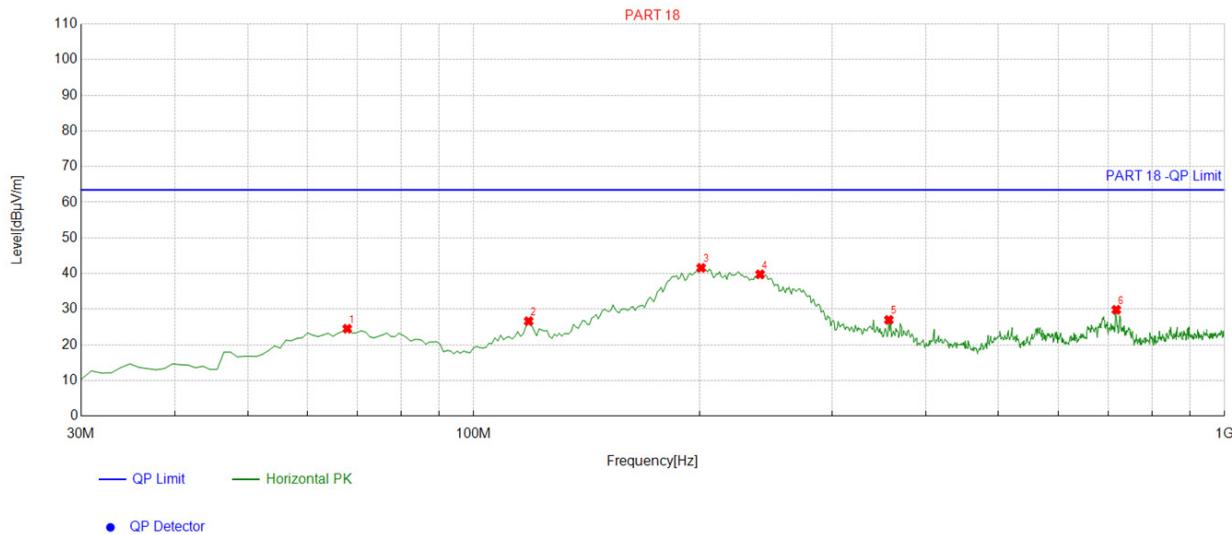


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	67.867868	-16.02	40.55	24.53	63.50	38.97	100	197	Horizontal
2	118.35835	-15.91	42.56	26.65	63.50	36.85	100	288	Horizontal
3	200.89089	-15.16	56.75	41.59	63.50	21.91	100	192	Horizontal
4	240.70070	-13.63	53.41	39.78	63.50	23.72	100	164	Horizontal
5	357.21721	-10.08	37.09	27.01	63.50	36.49	100	158	Horizontal
6	717.44744	-4.22	34.06	29.84	63.50	33.66	100	90	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Antenna polarity: V

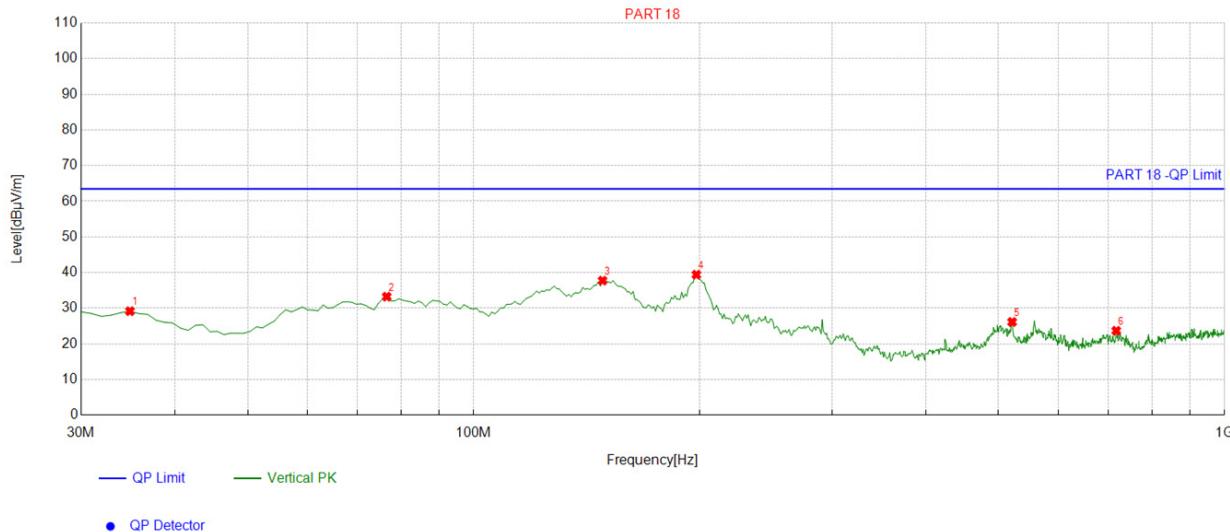

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	34.854855	-14.84	44.01	29.17	63.50	34.33	100	59	Vertical
2	76.606607	-17.96	51.20	33.24	63.50	30.26	100	23	Vertical
3	148.45845	-18.14	55.88	37.74	63.50	25.76	100	109	Vertical
4	197.97797	-14.86	54.27	39.41	63.50	24.09	100	231	Vertical
5	521.31131	-7.33	33.47	26.14	63.50	37.36	100	6	Vertical
6	717.44744	-4.22	27.90	23.68	63.50	39.82	100	147	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



5. Antenna Requirement


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is Coil Antenna, which permanently attached. It conforms to the standard requirements.



Antenna

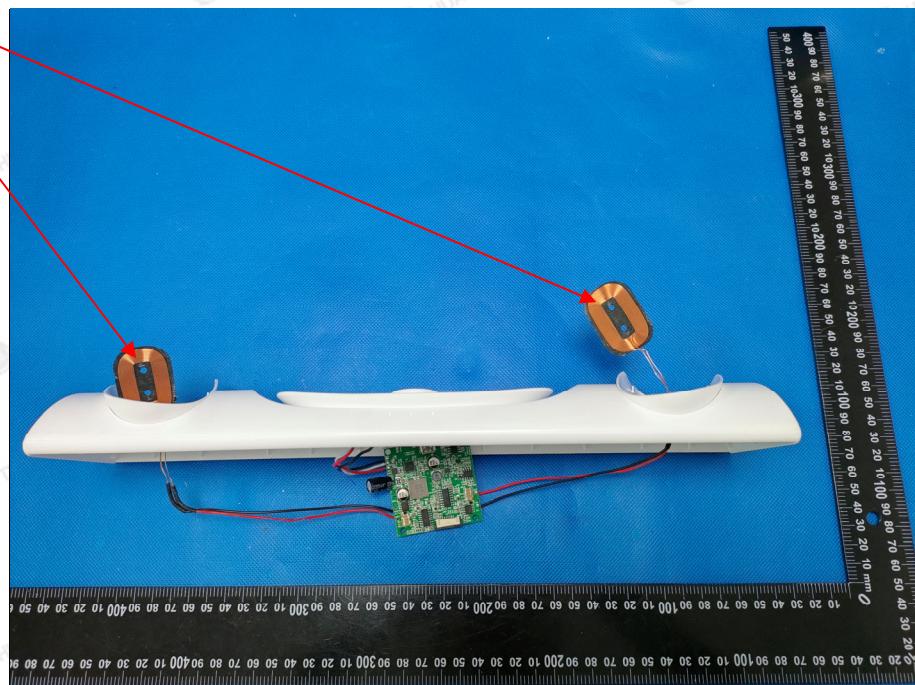



6. Photographs of Test

Radiated Emission

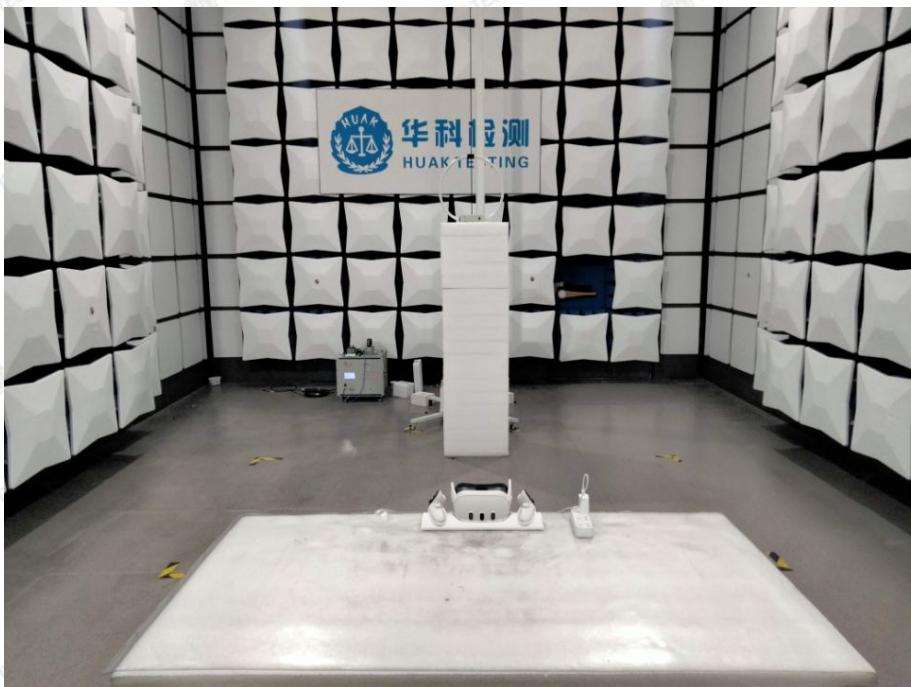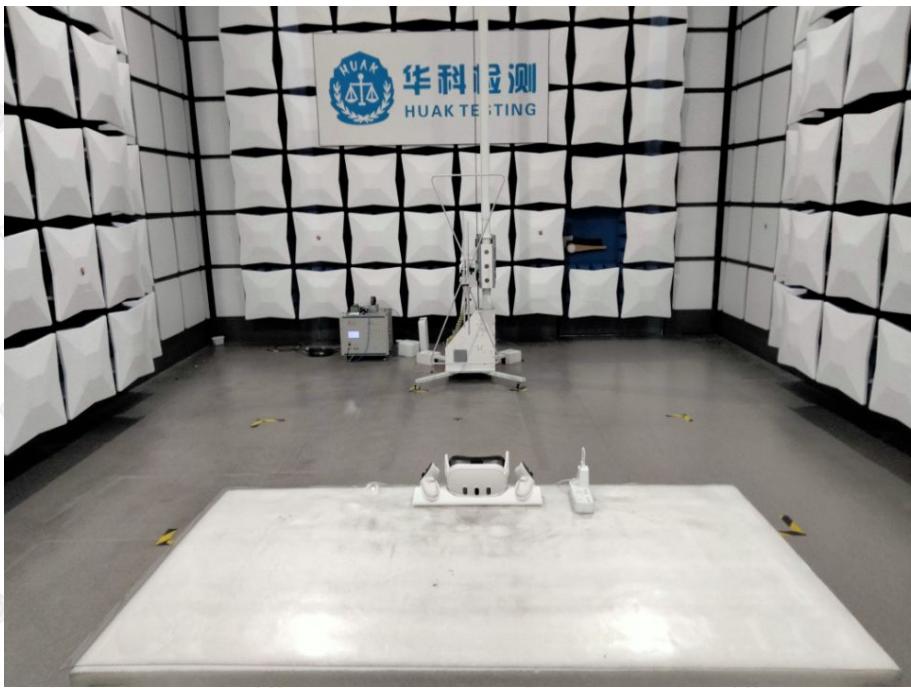

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Conducted Emission



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



7. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----