

Datasheet



Freedom

Part No:
FXP70.07.0053A

Description:

2.4GHz Freedom Flexible PCB Antenna
with 53mm 1.13 Cable and IPEX MHFI (U.FL) Connector

Features:

Low profile antenna
High performance magnetic field antenna
Flexible PCB Antenna with 3M adhesive
Dimensions: 27*25*0.2mm
Cable: 53mm 1.13
Connector: IPEX MHFI (U.FL)
RoHS & Reach Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	5
4. Radiation Patterns	7
5. Mechanical Drawing	9
6. Packaging	10
Changelog	11

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland
ISO 9001: 2015
Certified



Taiwan
ISO 9001: 2015
Certified



QUALITY MANAGEMENT SYSTEM
IATF16949

1. Introduction



The FXP70 Freedom 2.4GHz Antenna works on Wi-Fi, ZigBee, Bluetooth and ISM band at 2.4GHz. This antenna has been designed as a general solution to cover the current market applications, with easy installation through a cable connection. The antenna has been designed to work on different plastics material and thickness. We have selected a piece of ABS plastic with 2mm of thickness as a baseline for testing.

Many module manufacturers specify peak gain limits for any antennas that are to be connected to that module. Those peak gain limits are based on free-space conditions. In practice, the peak gain of an antenna tested in free-space can degrade by at least 1 or 2dBi when put inside a device. So ideally you should go for a slightly higher peak gain antenna than mentioned on the module specification to compensate for this effect, giving you better performance.

Upon testing of any of our antennas with your device and a selection of appropriate layout, integration technique, or cable, Taoglas can make sure any of our antennas' peak gain will be below the peak gain limits. Taoglas can then issue a specification and/or report for the selected antenna in your device that will clearly show it complying with the peak gain limits, so you can be assured you are meeting regulatory requirements for that module.

For example, a module manufacturer may state that the antenna must have less than 2dBi peak gain, but you don't need to select an embedded antenna that has a peak gain of less than 2dBi in free-space. This will give you a less optimized solution. It is better to go for a slightly higher free-space peak gain of 3dBi or more if available. Once that antenna gets integrated into your device, performance will degrade below this 2dBi peak gain due to the effects of GND plane, surrounding components, and device housing. If you want to be absolutely sure, contact Taoglas and we will test. Choosing a Taoglas antenna with a higher peak gain than what is specified by the module manufacturer and enlisting our help will ensure you are getting the best performance possible without exceeding the peak gain limits.

The cable and connector are fully customizable, for more information please contact your regional Taoglas customer support team.


2. Specifications

Wi-Fi MIMO	
Frequency (MHz)	2400~2500
Efficiency (%)	
2mm ABS	63.7
Free Space	30.5
Average Gain (dB)	
2mm ABS	-2
Free Space	-5.2
Peak Gain (dBi)	
2mm ABS	1.1
Free Space	-1.9
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni
VSWR	≤1.5:1
Max. input power	5W


Mechanical	
Dimensions	27 X 25 X 0.08 mm
Weight	1.2 g
Connector	MHFI (U.FL Compatible)
Cable	53mm of Mini-Coax 1.13 mm
Adhesive	3M 467
Environmental	
Temperature Range	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH

3. Antenna Characteristics


3.1 Return Loss

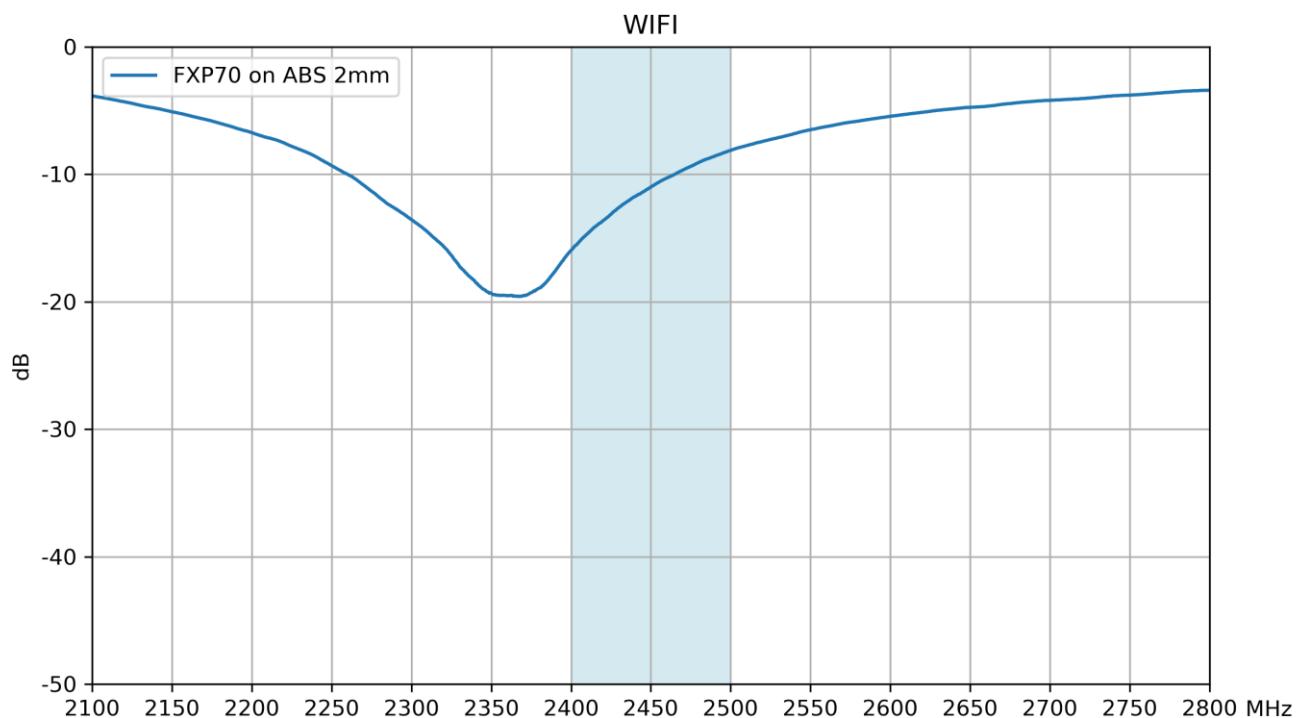


3.2 Efficiency

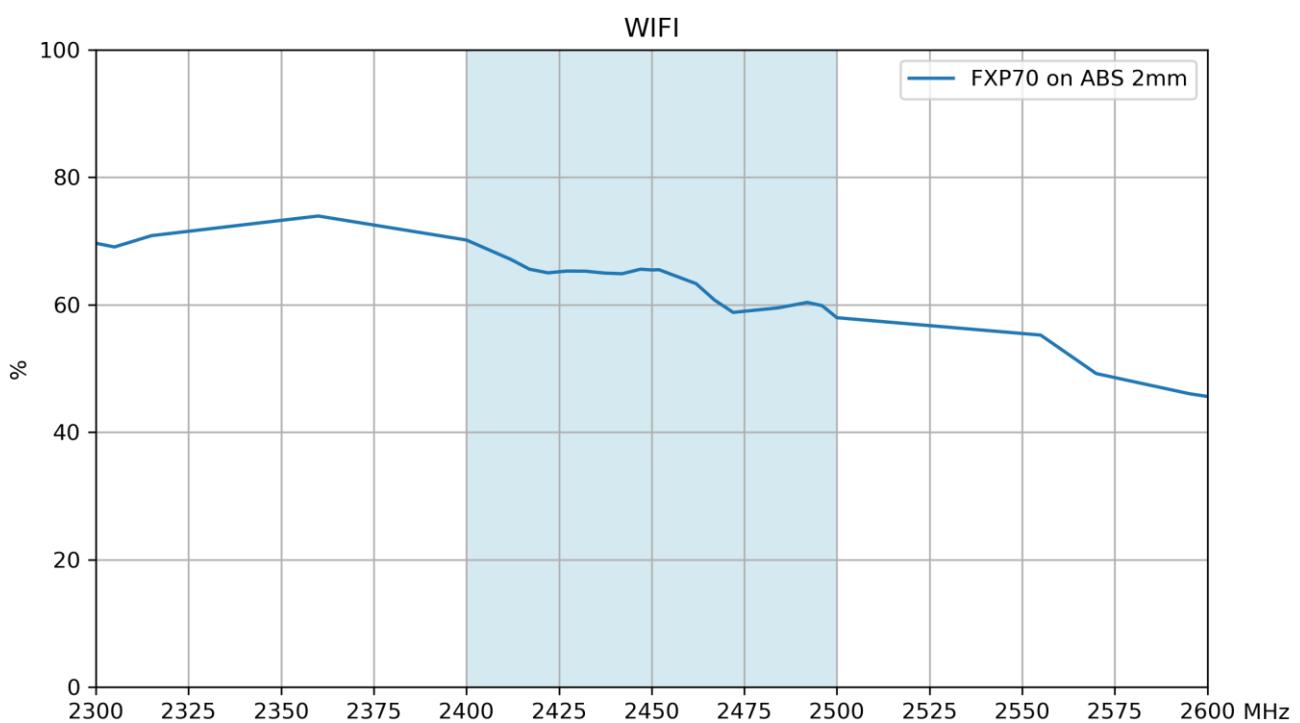

3.3 Average Gain

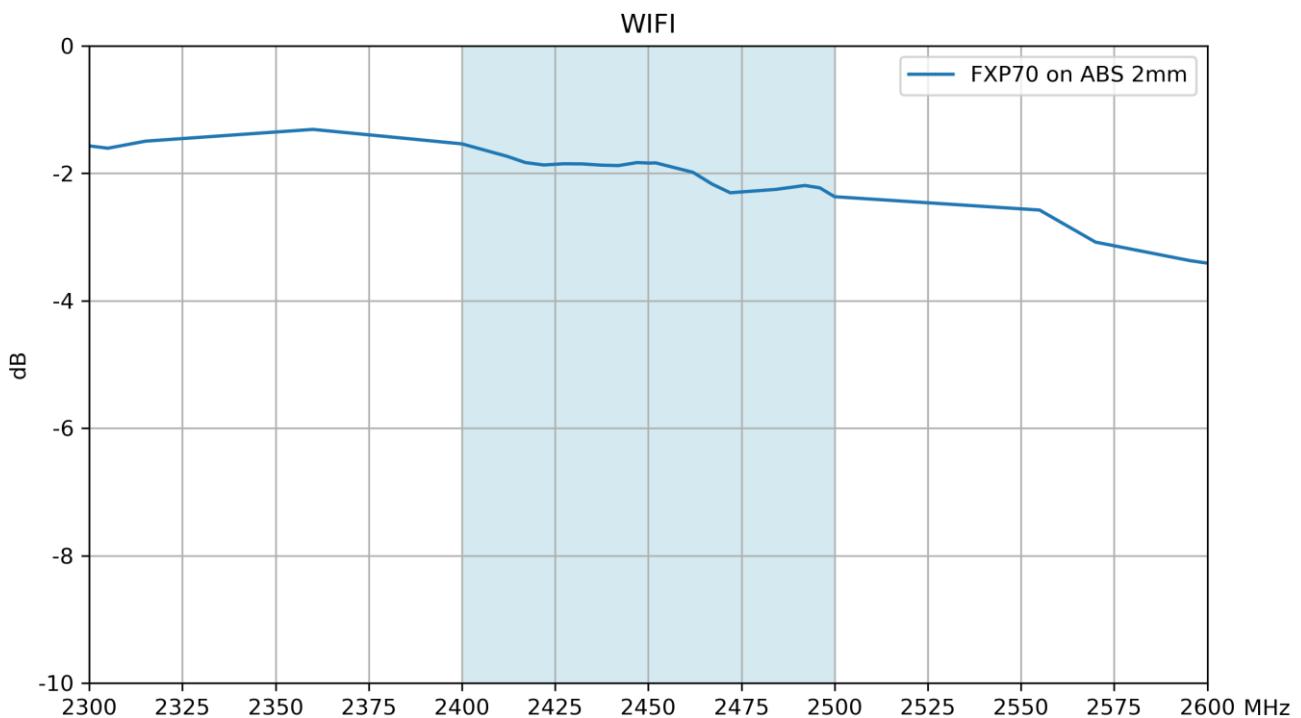


3.4 Peak Gain


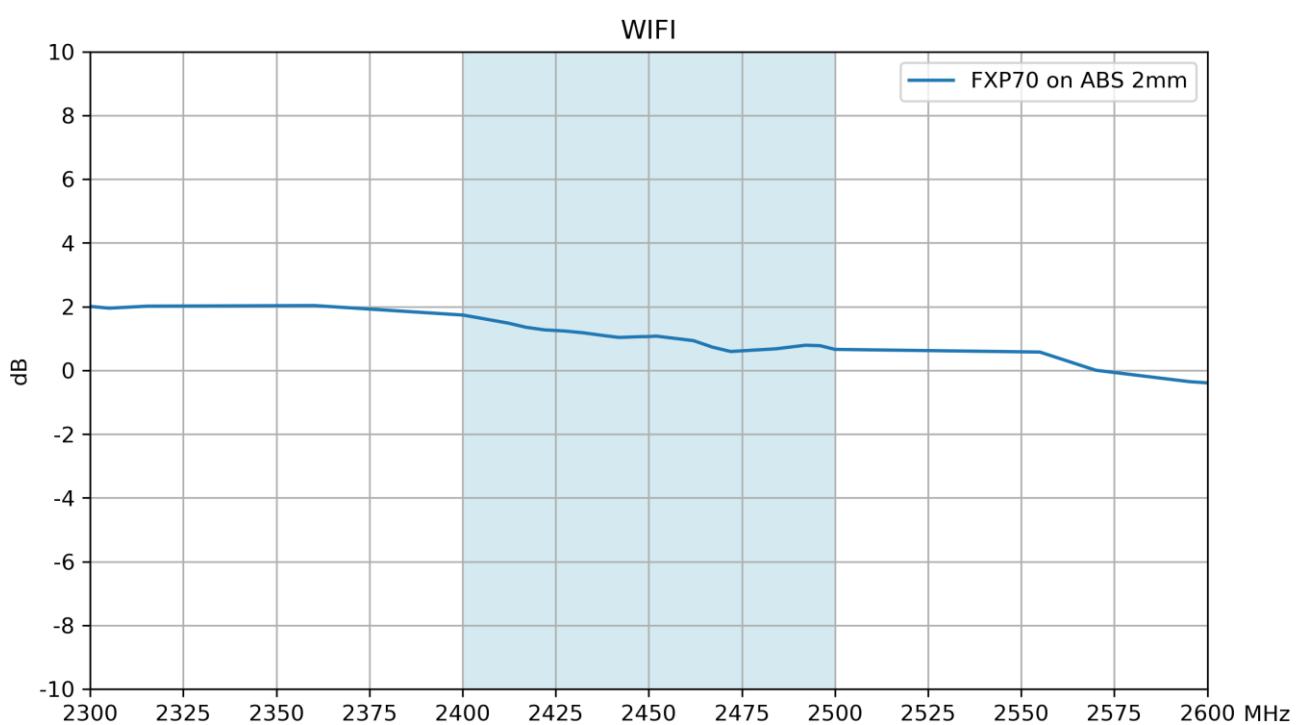


4. Radiation Patterns


4.1 Test Setup

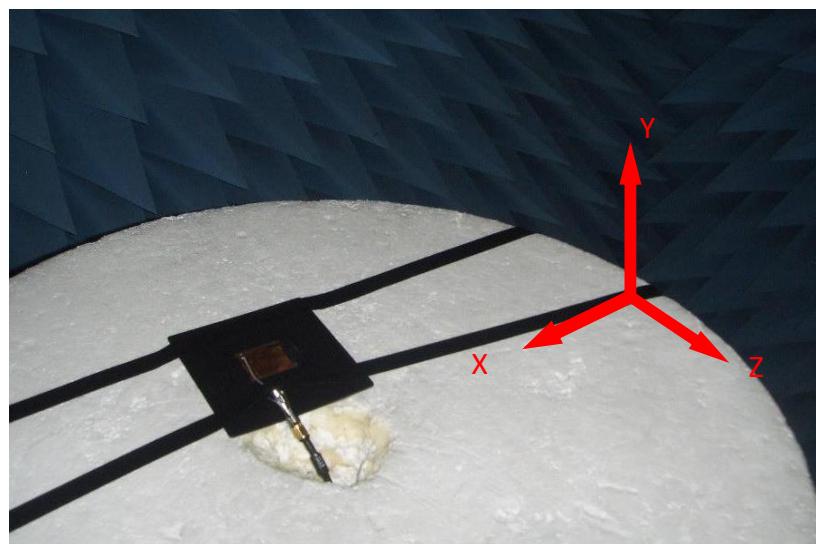

4.2 2450MHz 3D and 2D Radiation Patterns

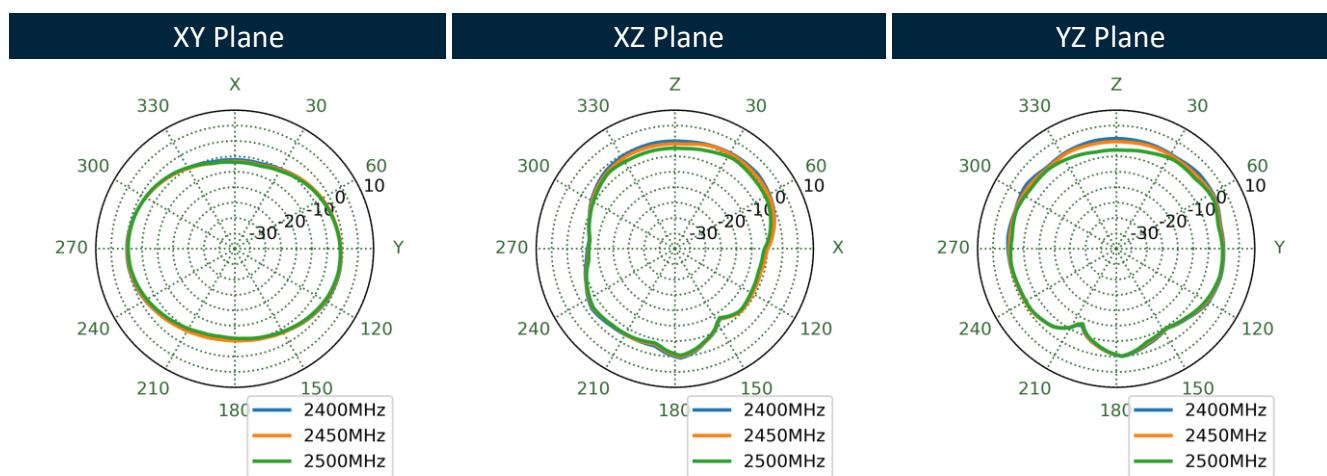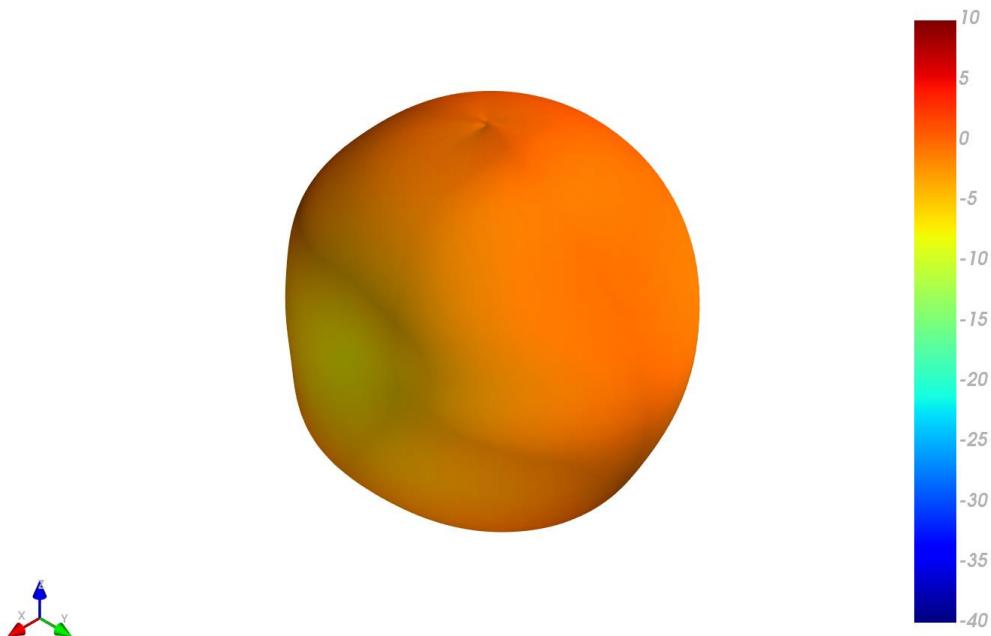

5. Mechanical Drawing (Units: mm)

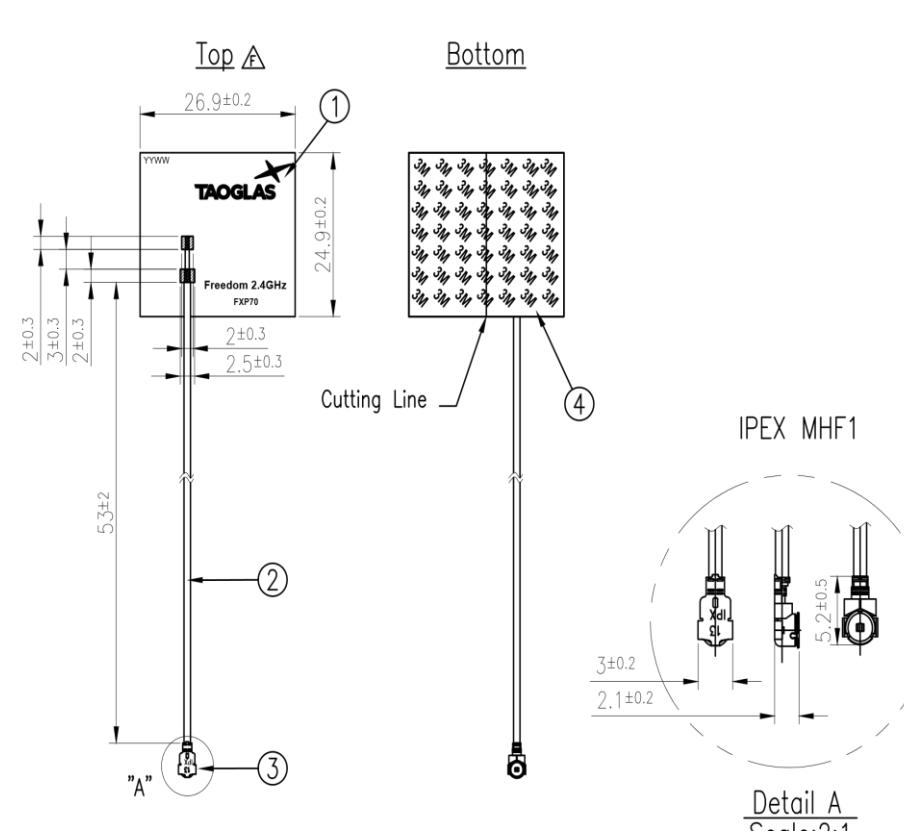
6	5	4	3	2	1																														
ISO NO: EDW-11-8-177		REV	ZONE	DESCRIPTION																															
		A	ALL	Initial Design	ENG APPROVED ISSUED DATE																														
				Bonnie	Aaron 2019/08/02																														
																																			
<p>NOTES:</p> <ol style="list-style-type: none"> 1. No dregs or insufficient soldering. Solder thickness 0.3~1.7mm 2. The solder must be smooth and full to the edges of the pad. The solder must not extend outside of the pad area. 3. The connector position has special orientation to the PCB as per drawing. 4. All material must be RoHS compliant. 5. Open/short QC, VSWR required. 6. Soldered area. 																																			
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Name</th> <th>P/N</th> <th>Material</th> <th>Finish</th> <th>QTY</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>FXP70 PCB</td> <td>100111C020024A</td> <td>Polymer 0.24t</td> <td>Black</td> <td>1</td> </tr> <tr> <td>2</td> <td>1.13 Coaxial Cable</td> <td>300215C020000A</td> <td>FEP</td> <td>Black</td> <td>1</td> </tr> <tr> <td>3</td> <td>IPEX MHF1</td> <td>204111G000013A</td> <td>Brass</td> <td>Au Plated</td> <td>1</td> </tr> <tr> <td>4</td> <td>Double-Sided Adhesive</td> <td>100111C020024A</td> <td>3M 467</td> <td>Brown Liner</td> <td>1</td> </tr> </tbody> </table>							Name	P/N	Material	Finish	QTY	1	FXP70 PCB	100111C020024A	Polymer 0.24t	Black	1	2	1.13 Coaxial Cable	300215C020000A	FEP	Black	1	3	IPEX MHF1	204111G000013A	Brass	Au Plated	1	4	Double-Sided Adhesive	100111C020024A	3M 467	Brown Liner	1
	Name	P/N	Material	Finish	QTY																														
1	FXP70 PCB	100111C020024A	Polymer 0.24t	Black	1																														
2	1.13 Coaxial Cable	300215C020000A	FEP	Black	1																														
3	IPEX MHF1	204111G000013A	Brass	Au Plated	1																														
4	Double-Sided Adhesive	100111C020024A	3M 467	Brown Liner	1																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">UNLESS OTHERWISE SPECIFIED</td> <td>DATE: 2011/06/20</td> <td colspan="2">MAT'L:</td> <td rowspan="3" style="text-align: center; vertical-align: middle;">  <small>This drawing and its inherent design concepts are property of TAOGLAS. Not to be copied or given to third parties without the written consent of TAOGLAS.</small> </td> </tr> <tr> <td colspan="2">TOLERANCES ON:</td> <td>UNIT: mm</td> <td colspan="2">FINISH:</td> </tr> <tr> <td colspan="2">.XX± 0.2 XX± 0.5 .XX± 0.1 X± 0.3 .XXX± 0.05</td> <td>THIRD ANGLE PROJECTION</td> <td colspan="2">SCALE: 1/1</td> </tr> <tr> <td colspan="2">APPROVED BY: Joanna</td> <td>CHECKED BY: Jimmy</td> <td>DRAWN BY: Jason</td> <td colspan="2">CUSTOMERS SIGNATURE / DATE</td> </tr> </table>						UNLESS OTHERWISE SPECIFIED		DATE: 2011/06/20	MAT'L:		 <small>This drawing and its inherent design concepts are property of TAOGLAS. Not to be copied or given to third parties without the written consent of TAOGLAS.</small>	TOLERANCES ON:		UNIT: mm	FINISH:		.XX± 0.2 XX± 0.5 .XX± 0.1 X± 0.3 .XXX± 0.05		THIRD ANGLE PROJECTION	SCALE: 1/1		APPROVED BY: Joanna		CHECKED BY: Jimmy	DRAWN BY: Jason	CUSTOMERS SIGNATURE / DATE									
UNLESS OTHERWISE SPECIFIED		DATE: 2011/06/20	MAT'L:		 <small>This drawing and its inherent design concepts are property of TAOGLAS. Not to be copied or given to third parties without the written consent of TAOGLAS.</small>																														
TOLERANCES ON:		UNIT: mm	FINISH:																																
.XX± 0.2 XX± 0.5 .XX± 0.1 X± 0.3 .XXX± 0.05		THIRD ANGLE PROJECTION	SCALE: 1/1																																
APPROVED BY: Joanna		CHECKED BY: Jimmy	DRAWN BY: Jason	CUSTOMERS SIGNATURE / DATE																															
<p>REV F A</p> <p>TITLE. : FXP70 Antenna Assembly 53mm 1.13 IPEX MHF1 PART NO. : FXP70.07.0053A</p>																																			
<p>6 5 4 3 2 1</p>																																			

6. Packaging

100pcs FXP70.07.0053A per PE Bag

Dimensions - 180*100mm

Weight - 130g




100mm

180mm

1000pcs FXP70.07.0053A per Large PE Bag

Dimensions - 280*450mm

Weight - 1.4Kg

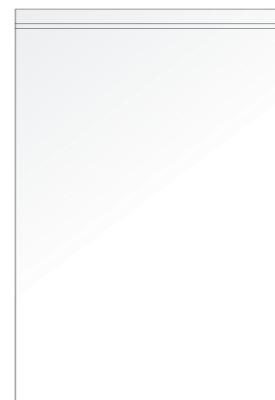


280mm

450mm

6000pcs FXP70.07.0053A per carton

Dimensions - 320*250*230mm

Weight - 8.5Kg

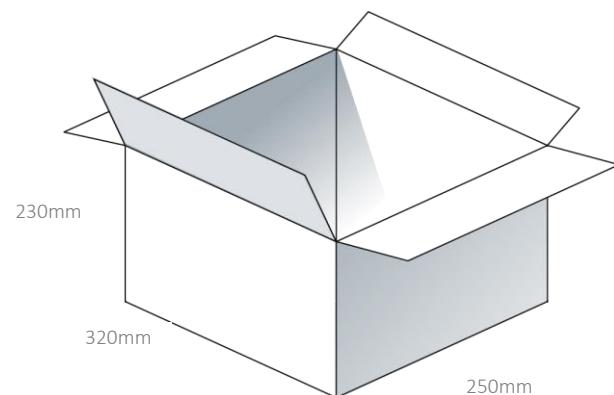

230mm

320mm

250mm

Changelog for the datasheet

SPE-12-8-013 - FXP70.07.0053A

Revision: F (Current Version)

Date:	2019-12-13
Changes:	Updated with new data
Changes Made by:	Jack Conroy

Previous Revisions

Revision: E

Date:	2016-08-23
Changes:	Drawing updated
Changes Made by:	Andy Mahoney

Revision: D

Date:	2015-08-20
Changes:	Added note on Gain
Changes Made by:	Aine Doyle

Revision: C

Date:	2015-01-14
Changes:	Updated Intro
Changes Made by:	Andy Mahoney

Revision: B

Date:	2015-01-13
Changes:	Packaging Details Updated
Changes Made by:	Andy Mahoney

Revision: A (Original First Release)

Date:	2012-06-02
Notes:	
Author:	Aine Doyle



TAOGLAS[®]

www.taoglas.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taoglas:

[FXP70.07.0053A](#)