



Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

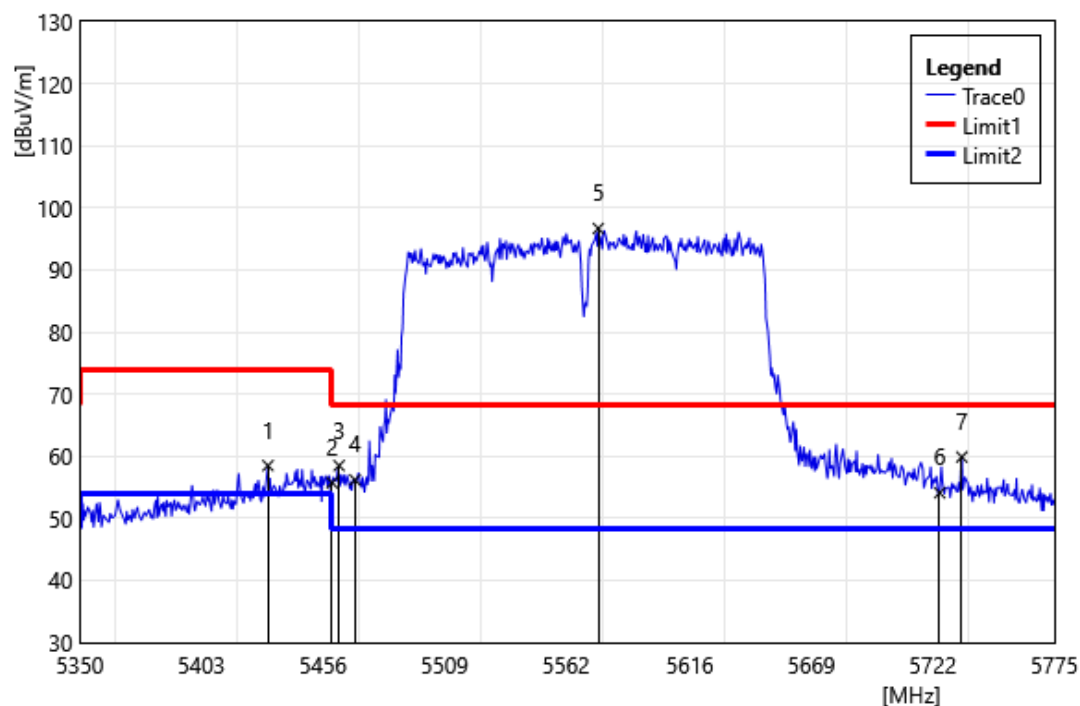


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5432.03	59.21	-0.71	58.50	74.00	-15.50	PEAK
2	5460.00	56.30	-0.57	55.73	74.00	-18.27	PEAK
3	5463.05	59.07	-0.57	58.50	68.20	-9.70	PEAK
4	5470.00	56.75	-0.56	56.19	68.20	-12.01	PEAK
5	5576.10	97.22	-0.54	96.68	68.20	28.48	PEAK
6	5725.00	54.45	-0.34	54.11	68.20	-14.09	PEAK
7	5734.63	60.12	-0.24	59.88	68.20	-8.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

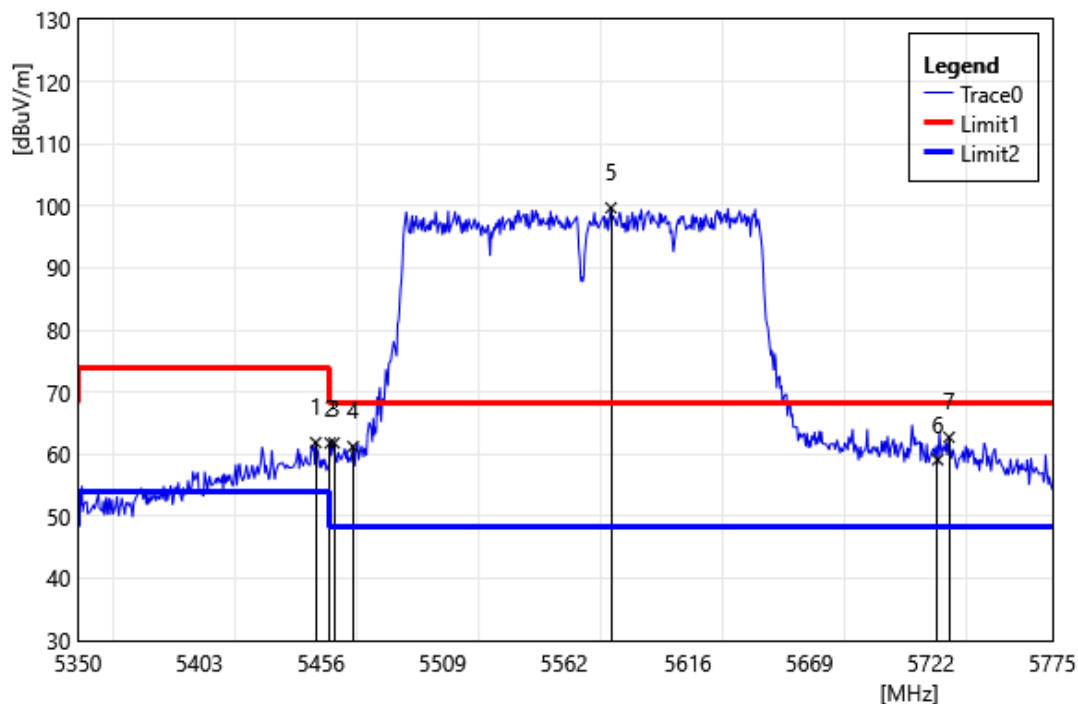


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.70	62.46	-0.58	61.88	74.00	-12.12	PEAK
2	5460.00	62.37	-0.57	61.80	74.00	-12.20	PEAK
3	5461.78	62.38	-0.57	61.81	68.20	-6.39	PEAK
4	5470.00	61.79	-0.56	61.23	68.20	-6.97	PEAK
5	5582.48	100.25	-0.55	99.70	68.20	31.50	PEAK
6	5725.00	59.44	-0.34	59.10	68.20	-9.10	PEAK
7	5729.95	63.02	-0.29	62.73	68.20	-5.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

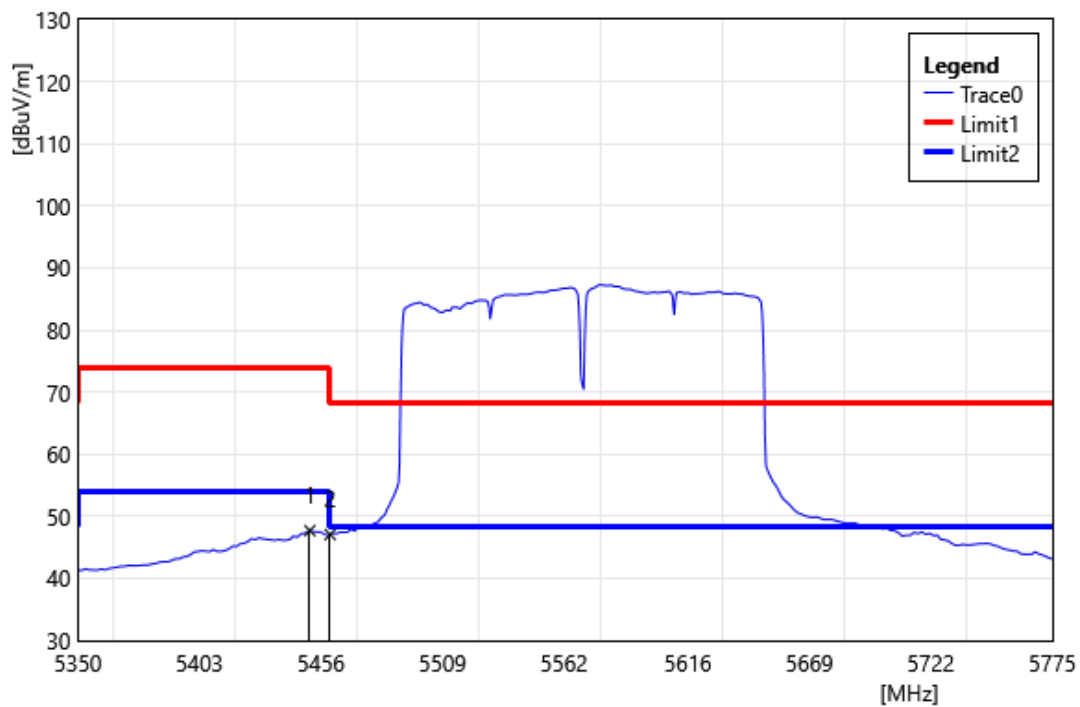


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.15	48.29	-0.58	47.71	54.00	-6.29	AVG
2	5460.00	47.64	-0.57	47.07	54.00	-6.93	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

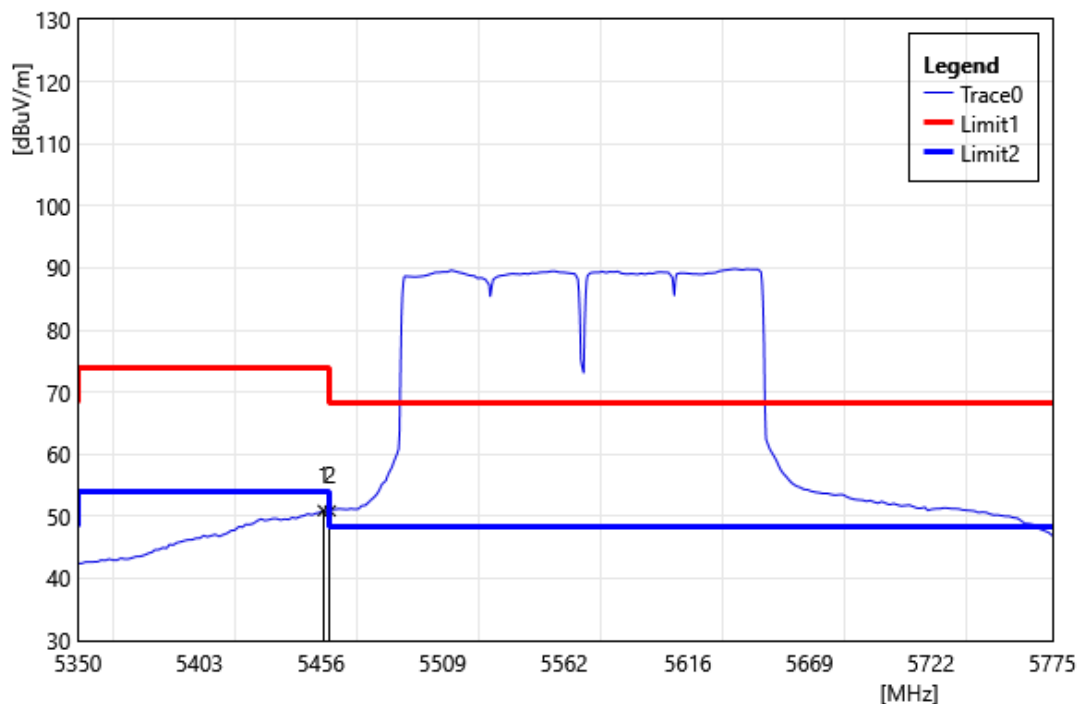


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.10	51.51	-0.58	50.93	54.00	-3.07	AVG
2	5460.00	51.45	-0.57	50.88	54.00	-3.12	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

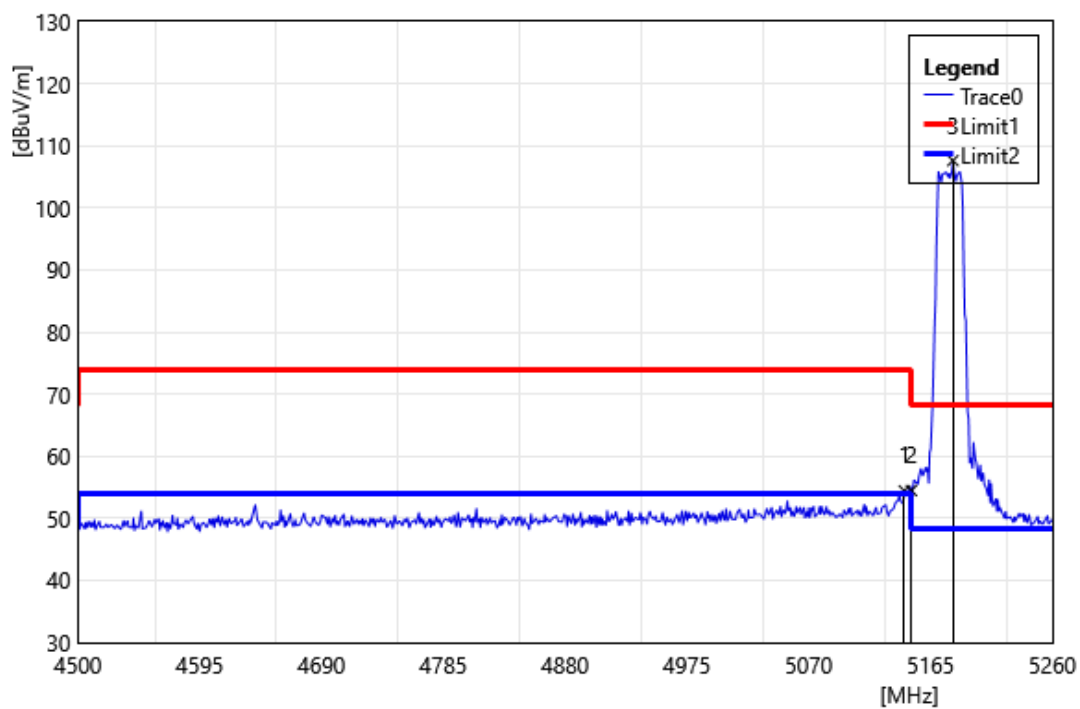


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	55.34	-0.90	54.44	74.00	-19.56	PEAK
2	5150.00	55.39	-0.91	54.48	74.00	-19.52	PEAK
3	5182.48	108.68	-1.07	107.62	68.20	39.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

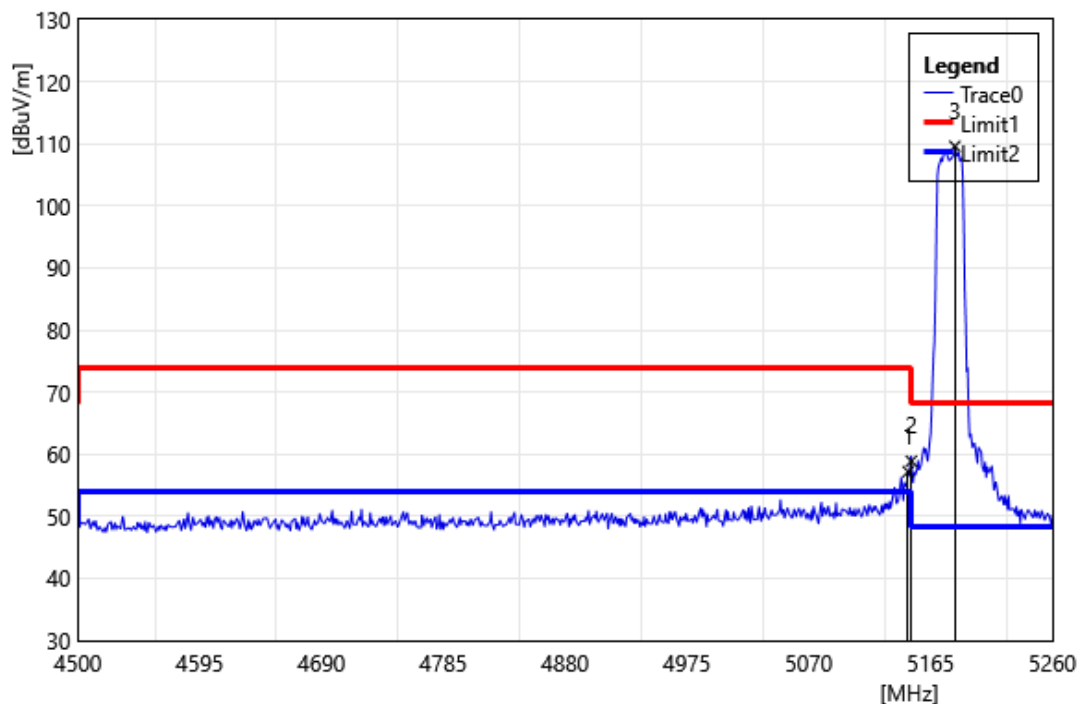


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	58.11	-0.91	57.21	74.00	-16.80	PEAK
2	5150.00	59.80	-0.91	58.89	74.00	-15.11	PEAK
3	5184.00	110.68	-1.08	109.60	68.20	41.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

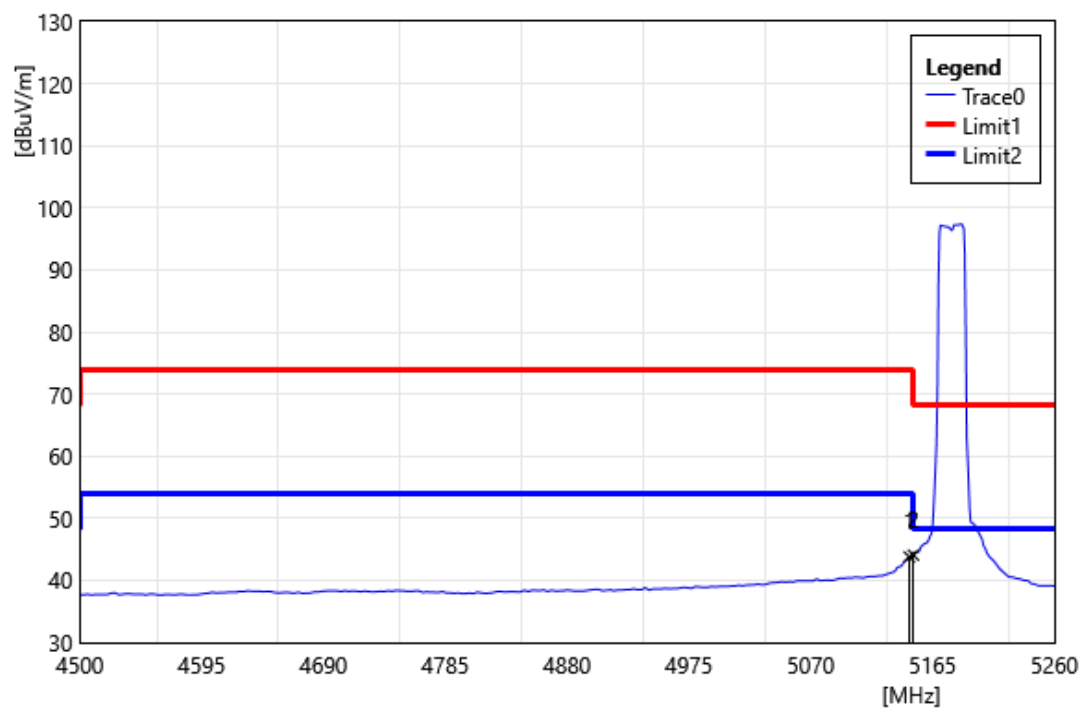


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	44.70	-0.90	43.80	54.00	-10.21	AVG
2	5150.00	44.99	-0.91	44.08	54.00	-9.92	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

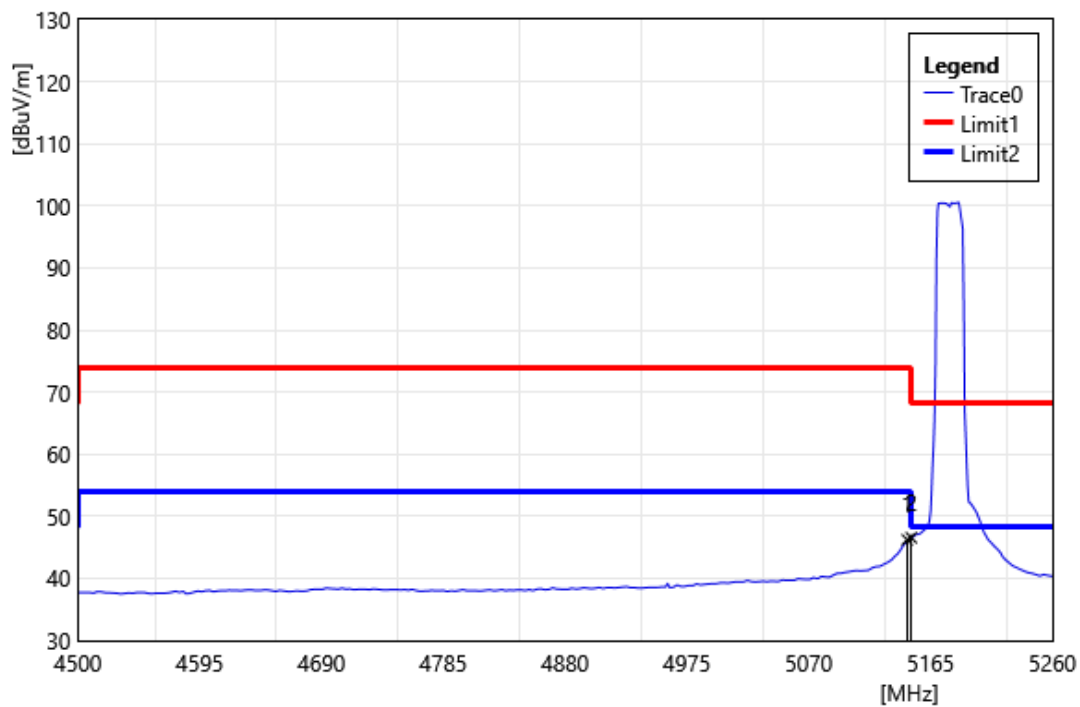


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	47.12	-0.90	46.23	54.00	-7.78	AVG
2	5150.00	47.46	-0.91	46.55	54.00	-7.45	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

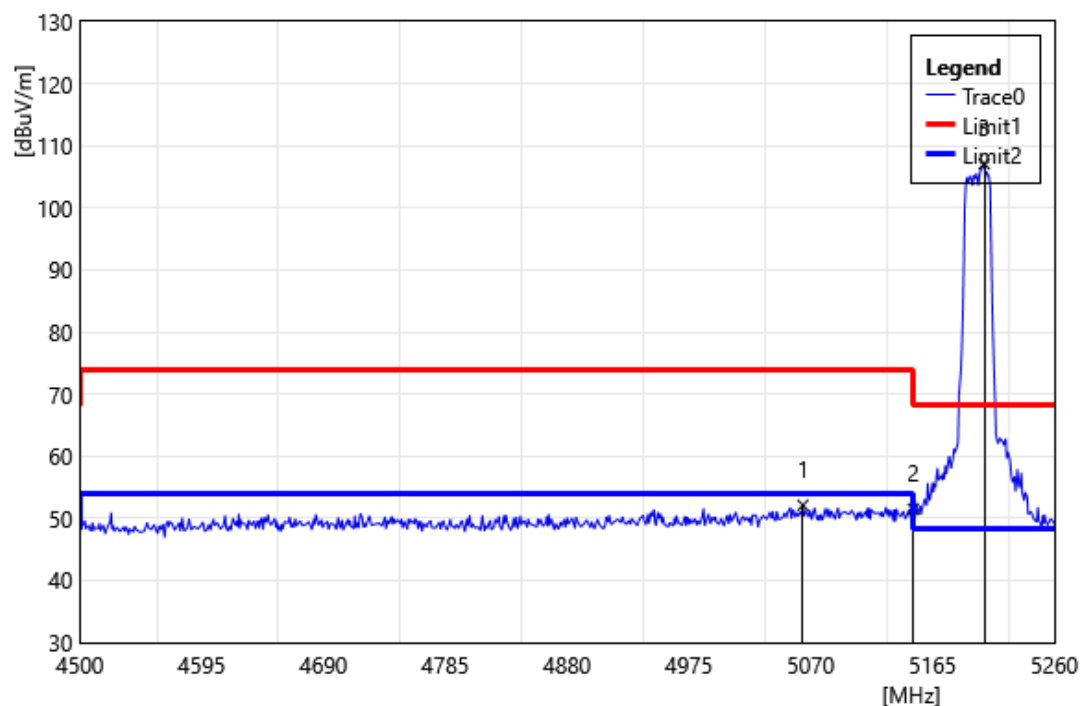


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5063.92	53.17	-1.05	52.12	74.00	-21.88	PEAK
2	5150.00	52.41	-0.91	51.50	74.00	-22.50	PEAK
3	5205.28	108.28	-1.19	107.09	68.20	38.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

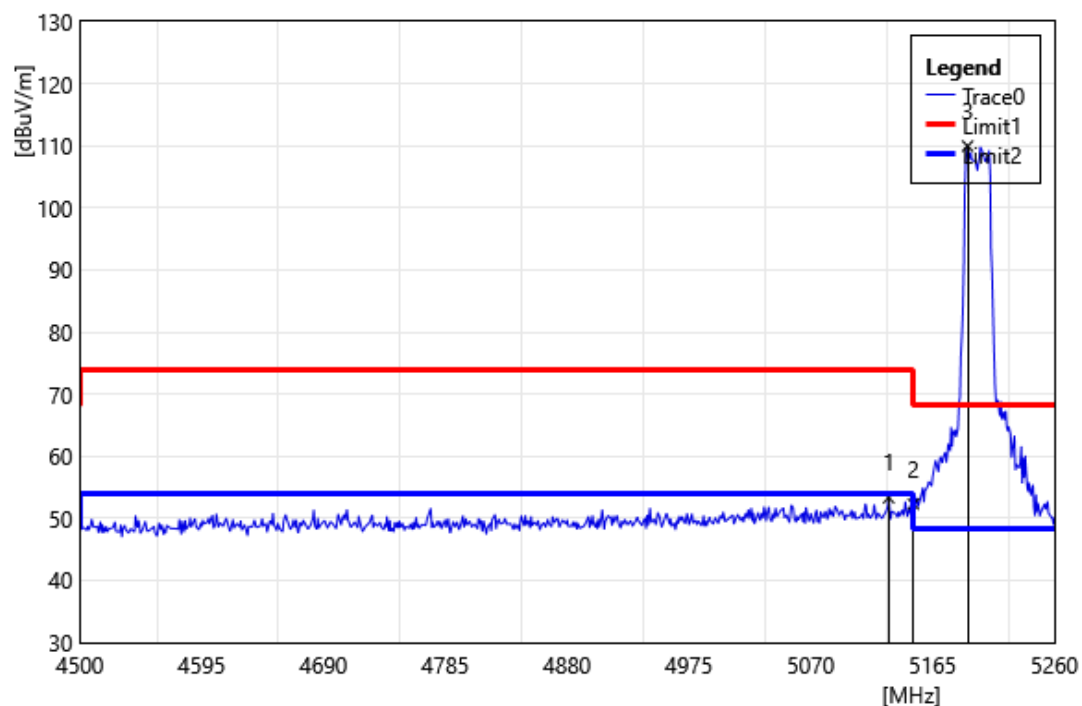


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5130.80	54.20	-0.89	53.32	74.00	-20.69	PEAK
2	5150.00	53.20	-0.91	52.29	74.00	-21.71	PEAK
3	5192.36	111.07	-1.12	109.95	68.20	41.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

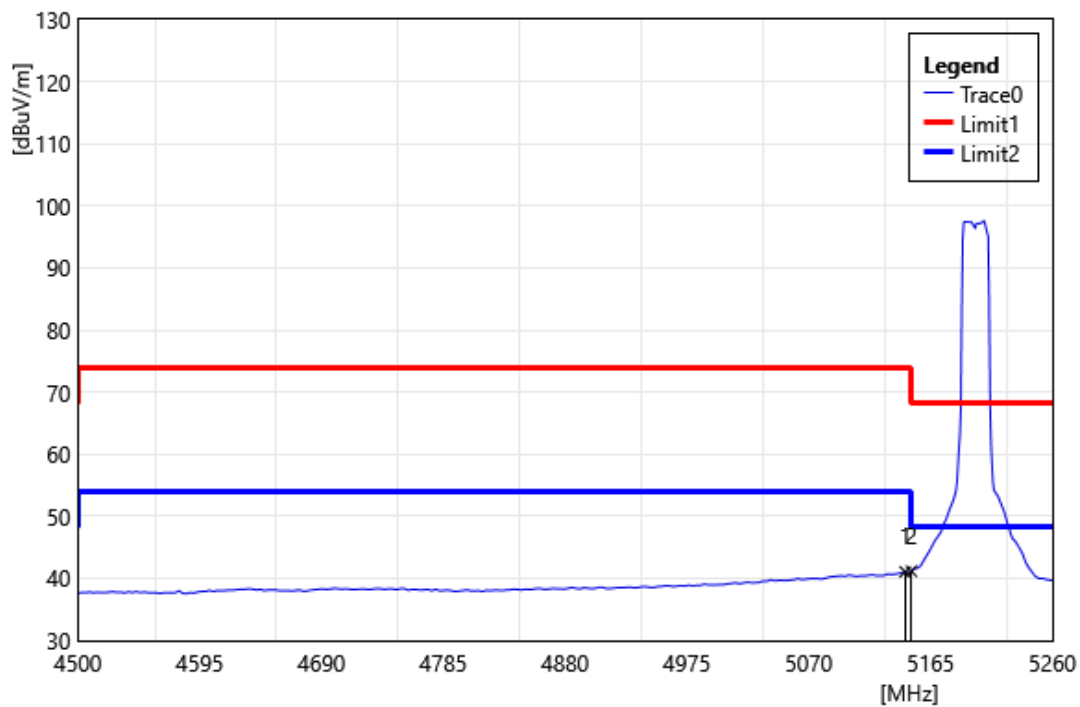


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	41.97	-0.90	41.07	54.00	-12.93	AVG
2	5150.00	42.08	-0.91	41.18	54.00	-12.82	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

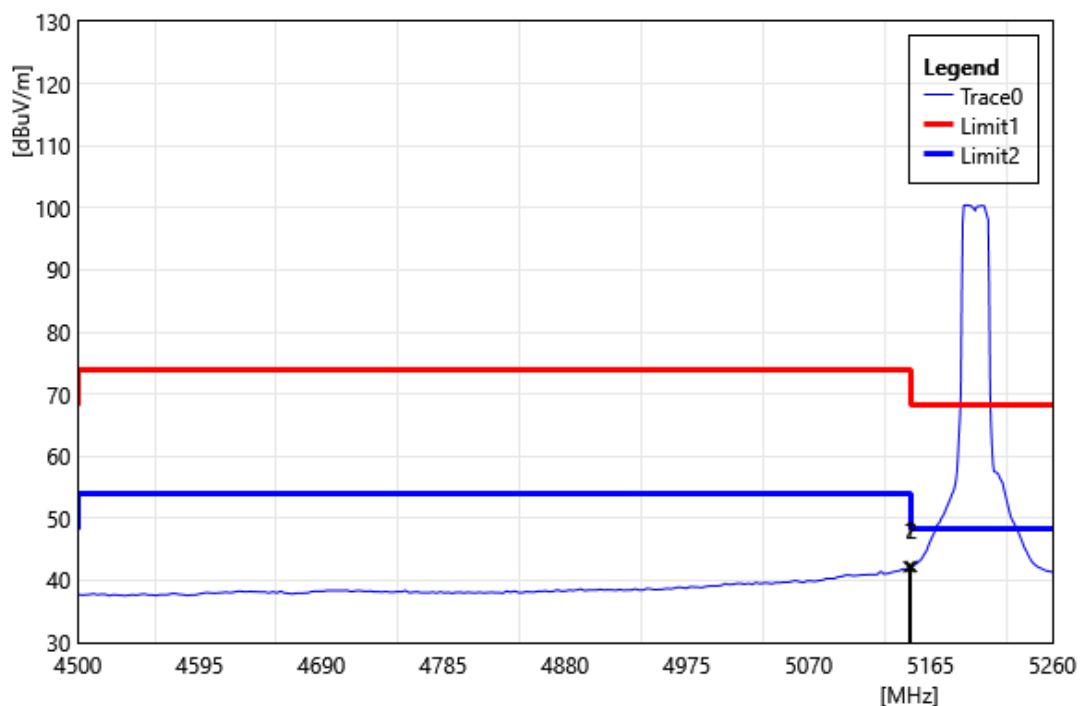


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	43.09	-0.91	42.18	54.00	-11.82	AVG
2	5150.00	43.16	-0.91	42.25	54.00	-11.75	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

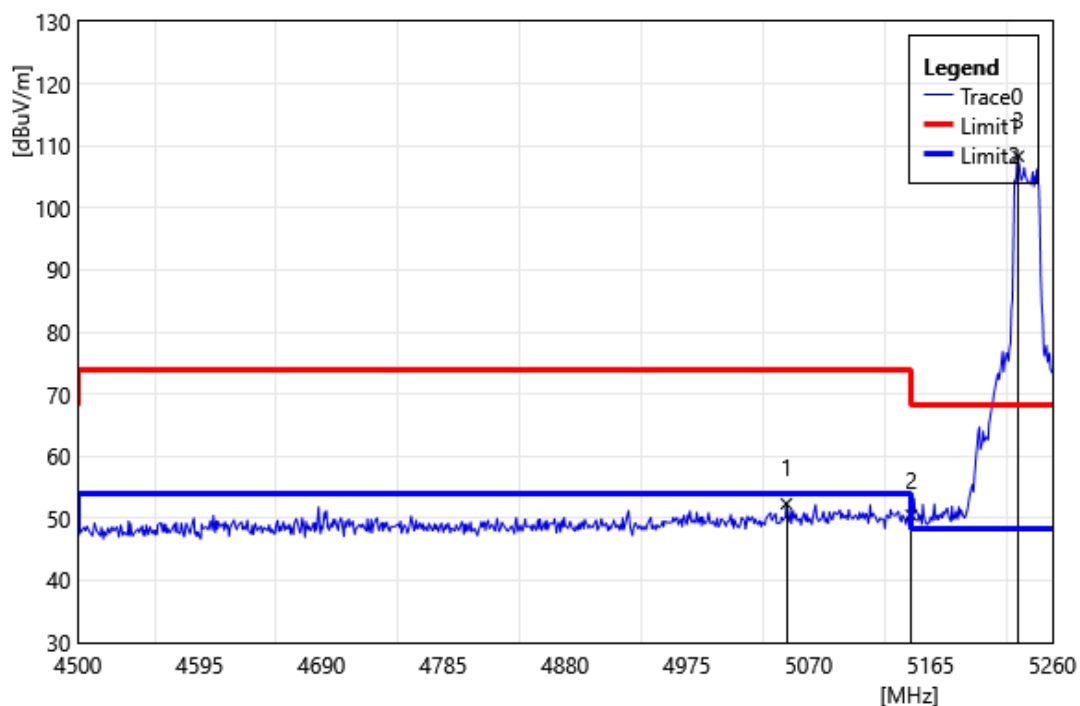


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5052.52	53.45	-1.10	52.35	74.00	-21.65	PEAK
2	5150.00	51.40	-0.91	50.50	74.00	-23.50	PEAK
3	5233.40	109.70	-1.39	108.31	68.20	40.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

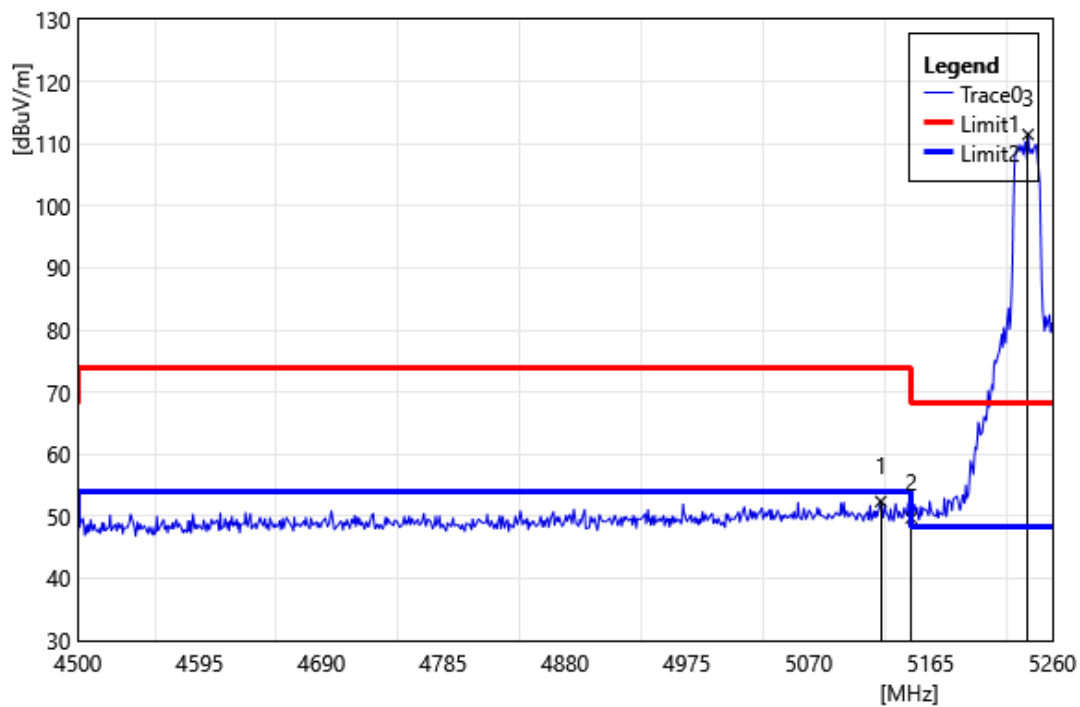


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5126.24	53.28	-0.89	52.39	74.00	-21.61	PEAK
2	5150.00	50.63	-0.91	49.72	74.00	-24.28	PEAK
3	5241.00	112.94	-1.44	111.50	68.20	43.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

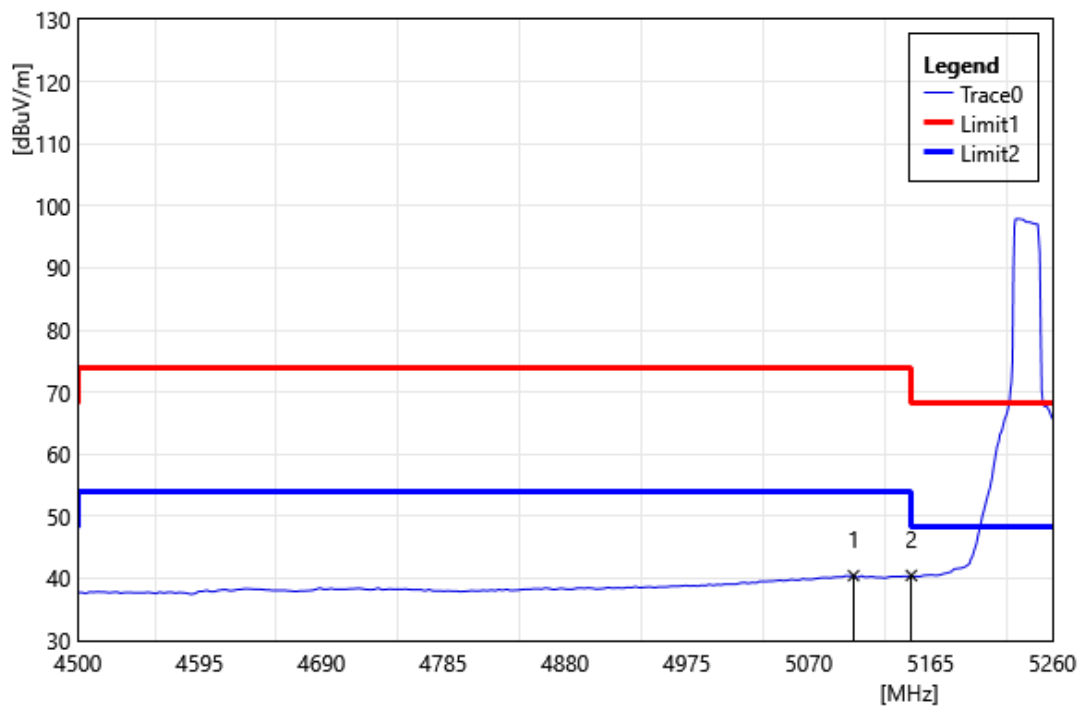


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5104.96	41.32	-0.87	40.45	54.00	-13.55	AVG
2	5150.00	41.39	-0.91	40.48	54.00	-13.52	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

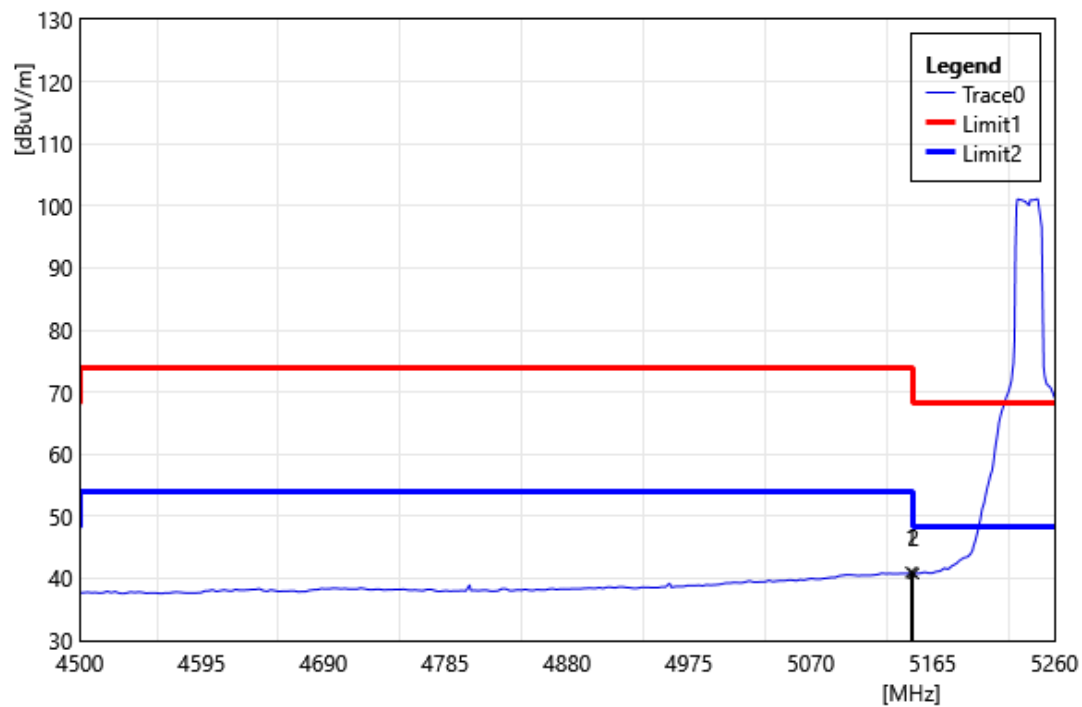


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	41.89	-0.91	40.98	54.00	-13.02	AVG
2	5150.00	41.71	-0.91	40.80	54.00	-13.20	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

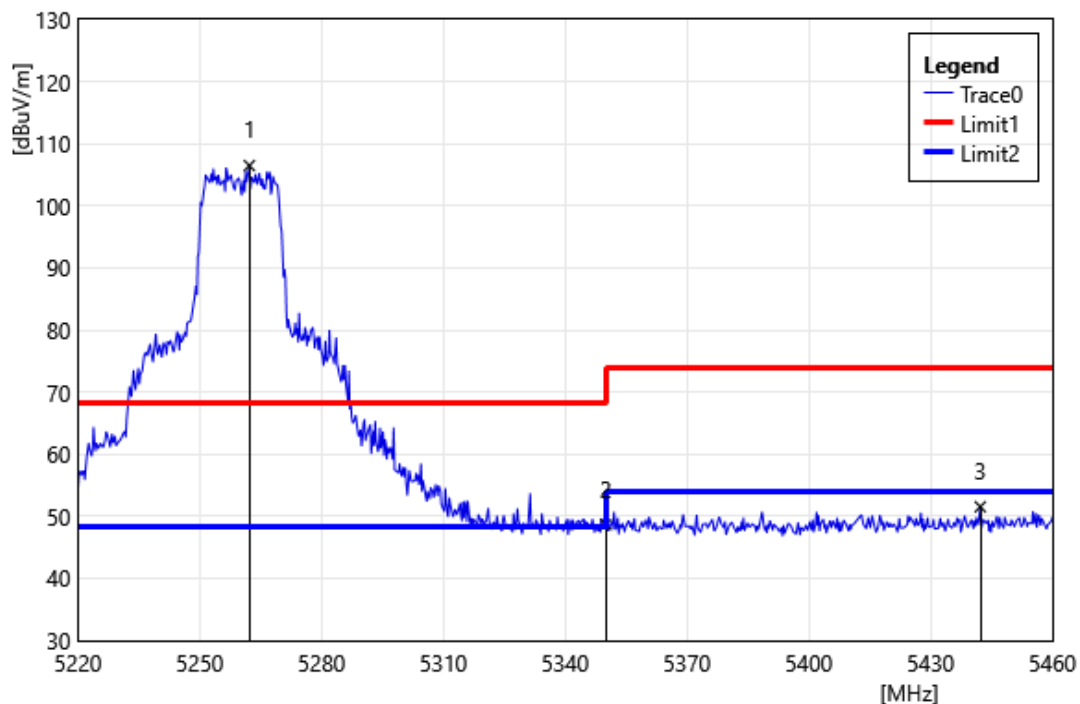


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5262.24	108.03	-1.54	106.49	68.20	38.29	PEAK
2	5350.00	49.97	-1.29	48.67	74.00	-25.33	PEAK
3	5442.24	52.18	-0.64	51.54	74.00	-22.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

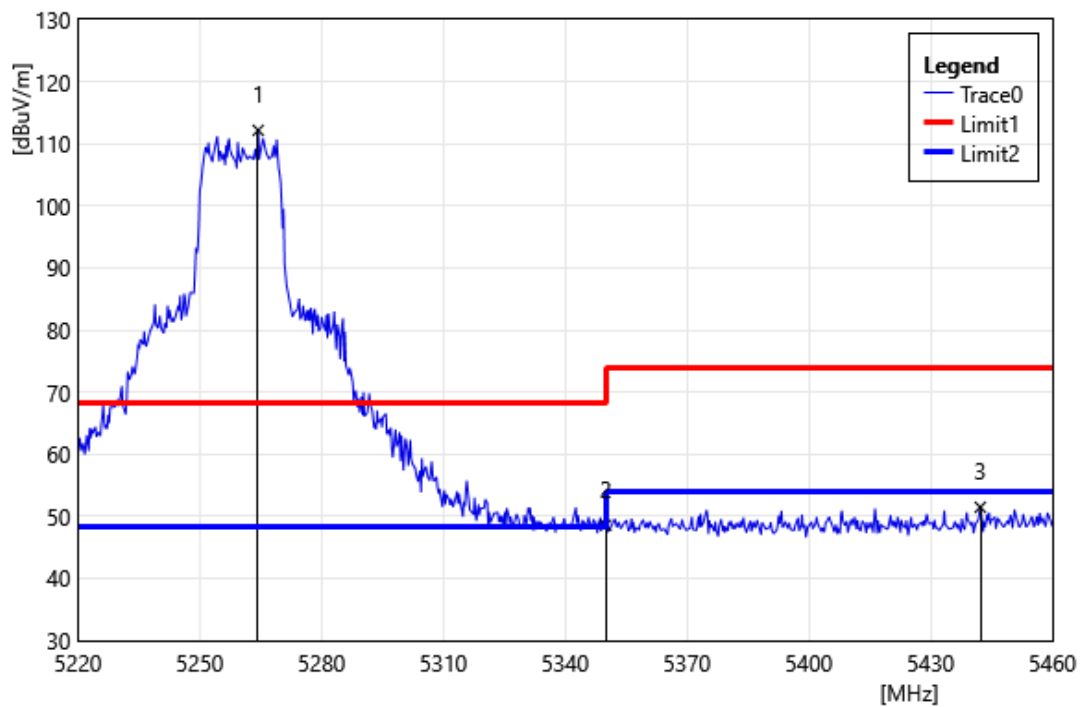


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5264.40	113.72	-1.54	112.18	68.20	43.98	PEAK
2	5350.00	49.88	-1.29	48.58	74.00	-25.42	PEAK
3	5442.24	52.10	-0.64	51.46	74.00	-22.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

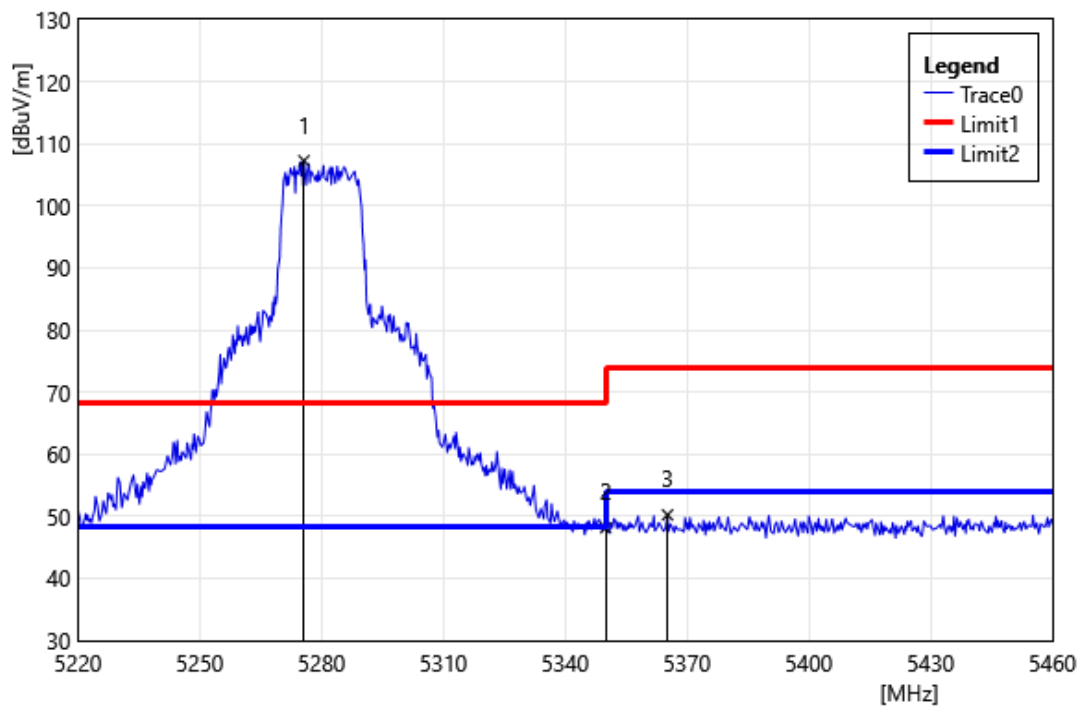


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5275.68	108.86	-1.58	107.28	68.20	39.08	PEAK
2	5350.00	49.46	-1.29	48.16	74.00	-25.84	PEAK
3	5365.20	51.42	-1.18	50.24	74.00	-23.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

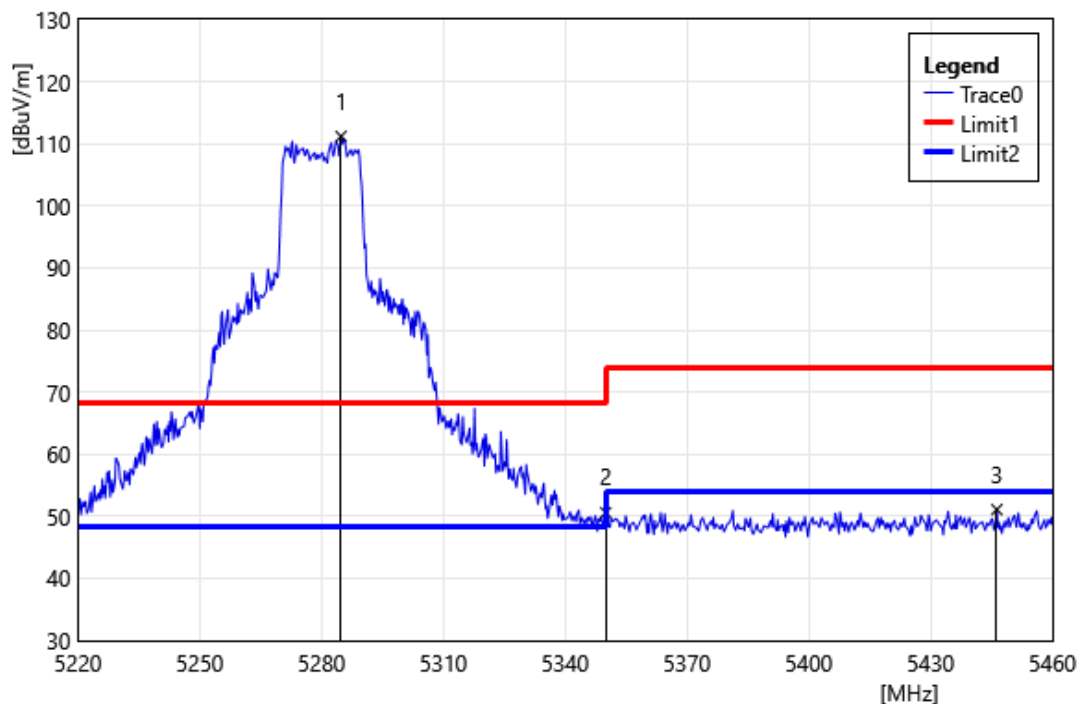


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5284.80	112.79	-1.60	111.19	68.20	42.99	PEAK
2	5350.00	51.89	-1.29	50.60	74.00	-23.40	PEAK
3	5446.32	51.70	-0.61	51.10	74.00	-22.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

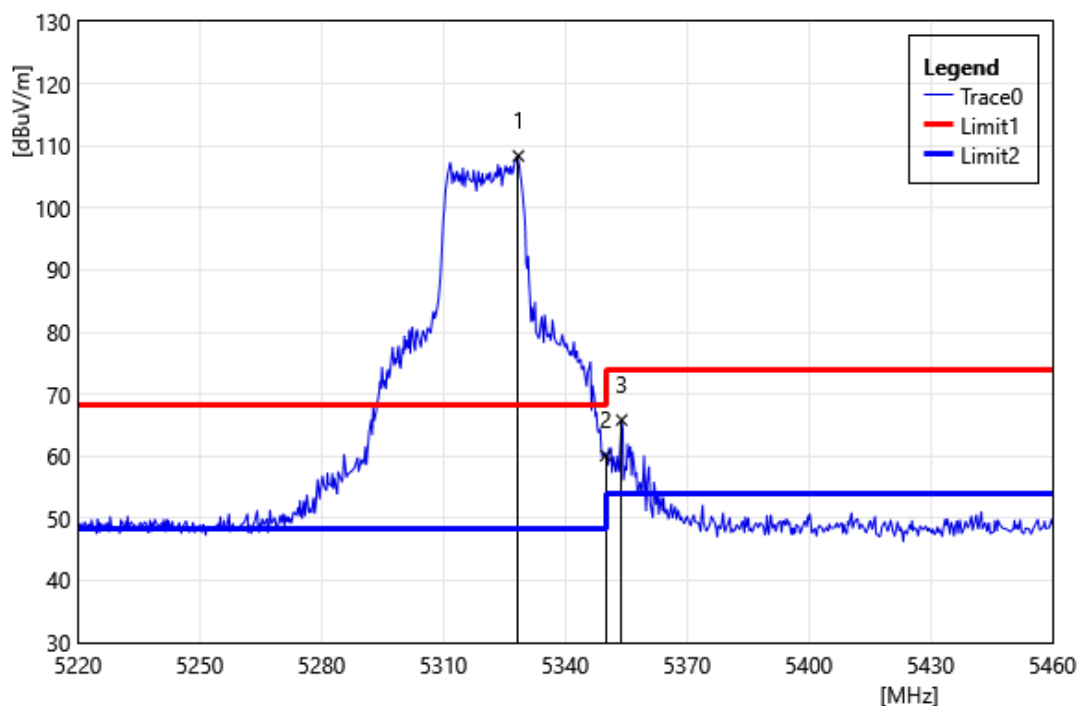


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5328.48	109.81	-1.44	108.37	68.20	40.17	PEAK
2	5350.00	61.38	-1.29	60.09	74.00	-13.91	PEAK
3	5353.92	67.10	-1.26	65.84	74.00	-8.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

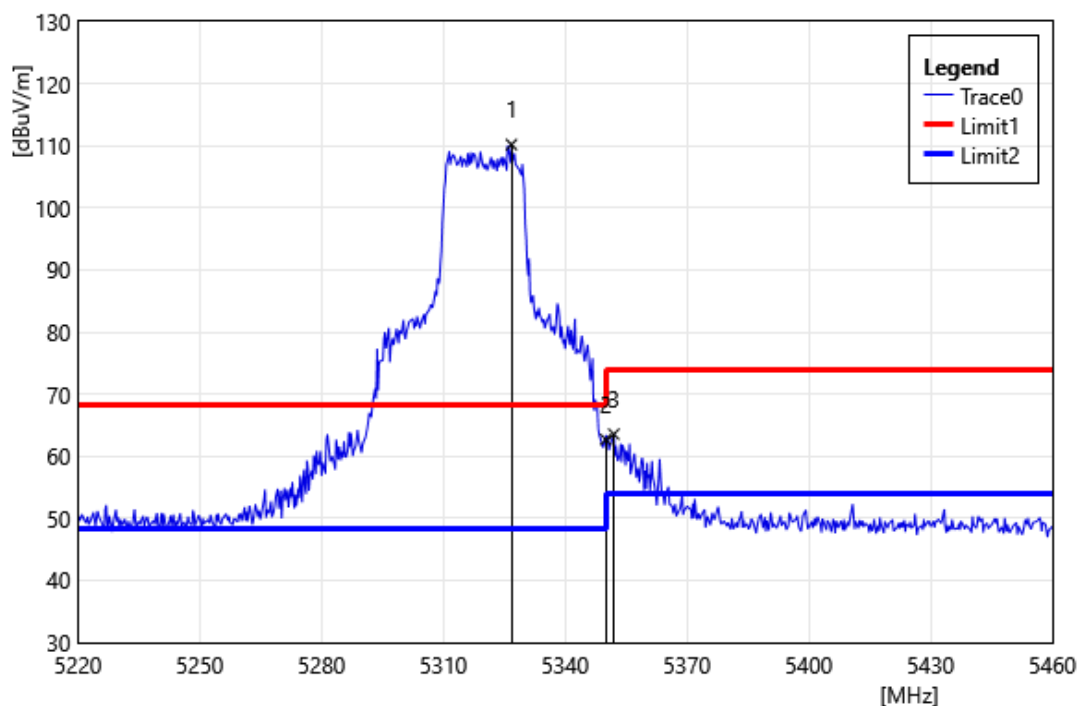


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5326.80	111.65	-1.46	110.19	68.20	41.99	PEAK
2	5350.00	63.98	-1.29	62.69	74.00	-11.31	PEAK
3	5352.00	64.84	-1.28	63.56	74.00	-10.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320 MHz		
Polarization:	Vertical		
Remark:			

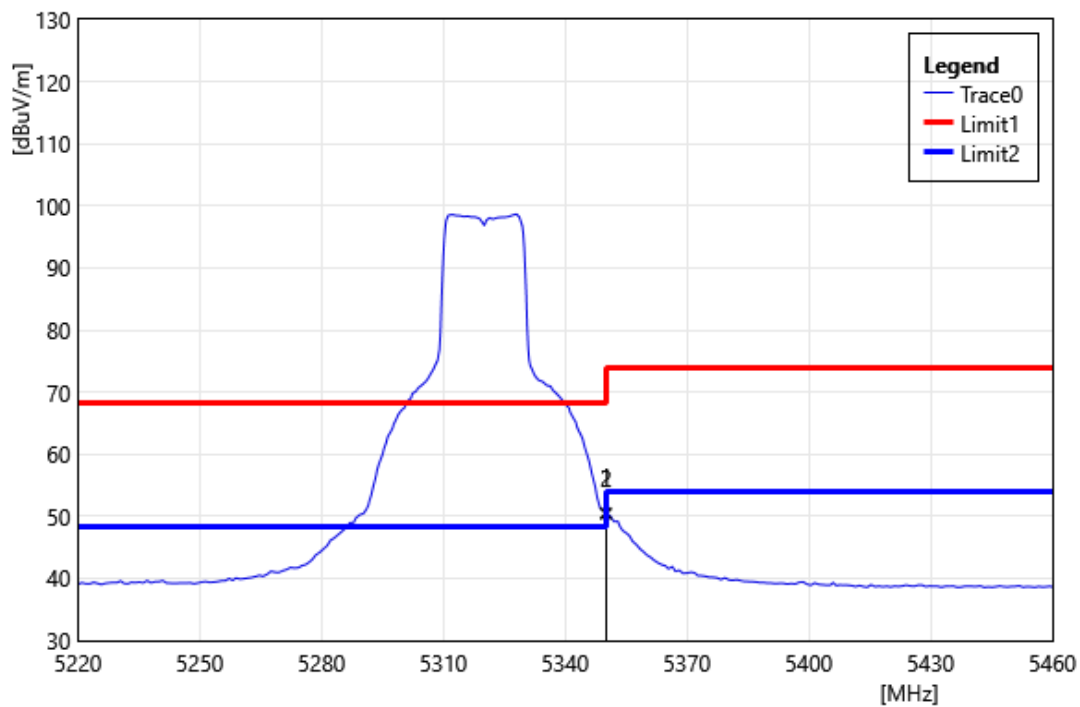


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	51.84	-1.29	50.55	54.00	-3.45	AVG
2	5350.08	51.67	-1.29	50.38	54.00	-3.62	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

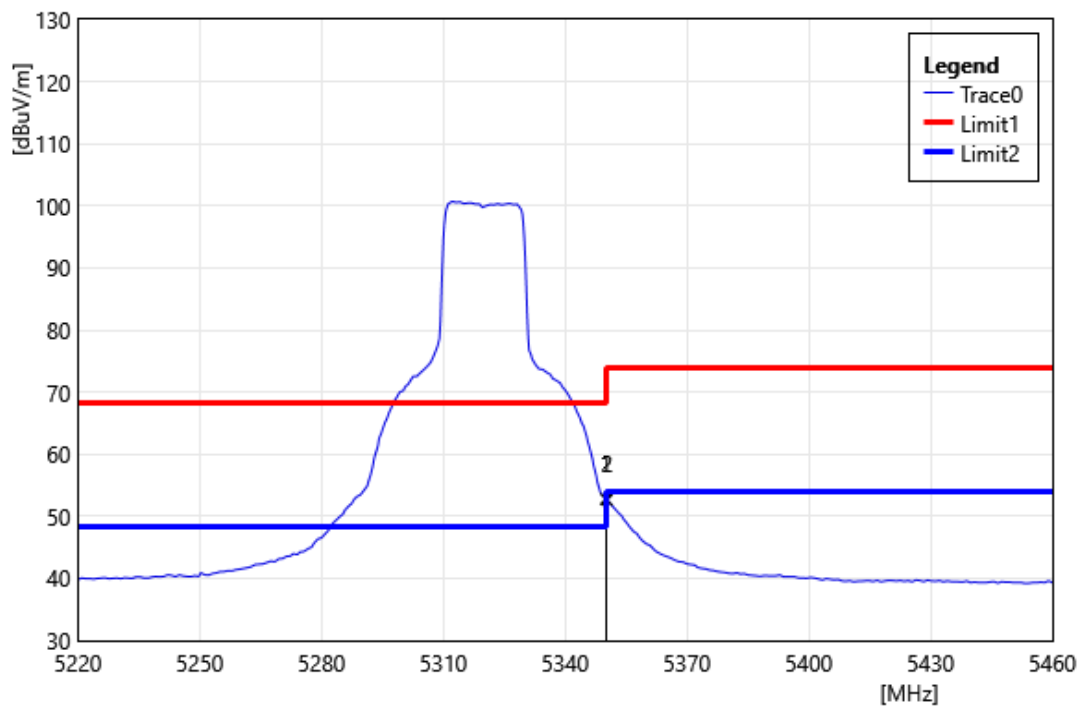


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	54.08	-1.29	52.79	54.00	-1.21	AVG
2	5350.32	53.92	-1.29	52.63	54.00	-1.37	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

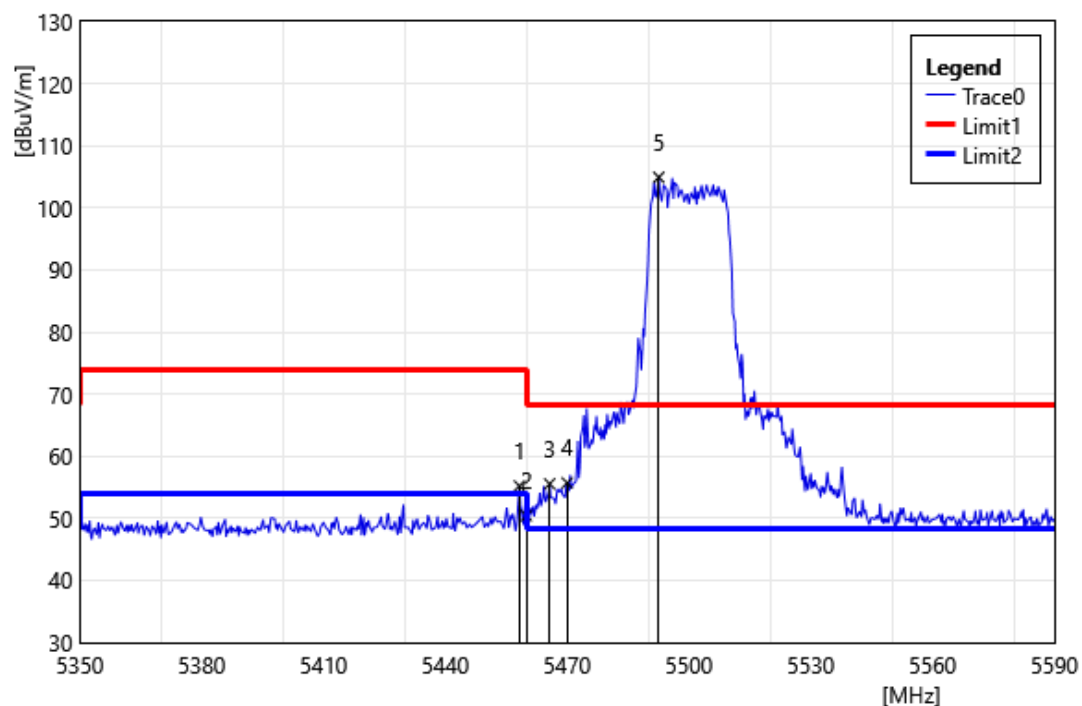


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	55.80	-0.58	55.22	74.00	-18.79	PEAK
2	5460.00	51.01	-0.57	50.44	74.00	-23.56	PEAK
3	5465.68	56.13	-0.57	55.56	68.20	-12.64	PEAK
4	5470.00	56.27	-0.56	55.71	68.20	-12.49	PEAK
5	5492.56	105.47	-0.54	104.93	68.20	36.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

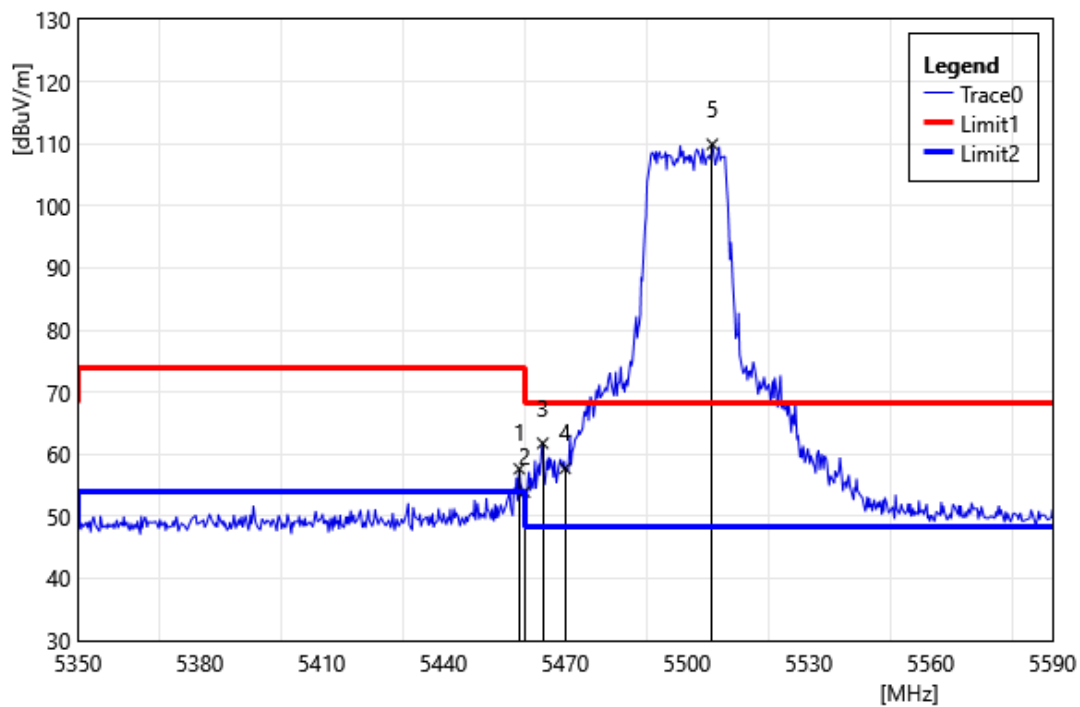


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	58.23	-0.57	57.66	74.00	-16.34	PEAK
2	5460.00	54.49	-0.57	53.92	74.00	-20.08	PEAK
3	5464.48	62.35	-0.57	61.78	68.20	-6.42	PEAK
4	5470.00	58.28	-0.56	57.72	68.20	-10.48	PEAK
5	5506.24	110.45	-0.53	109.92	68.20	41.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

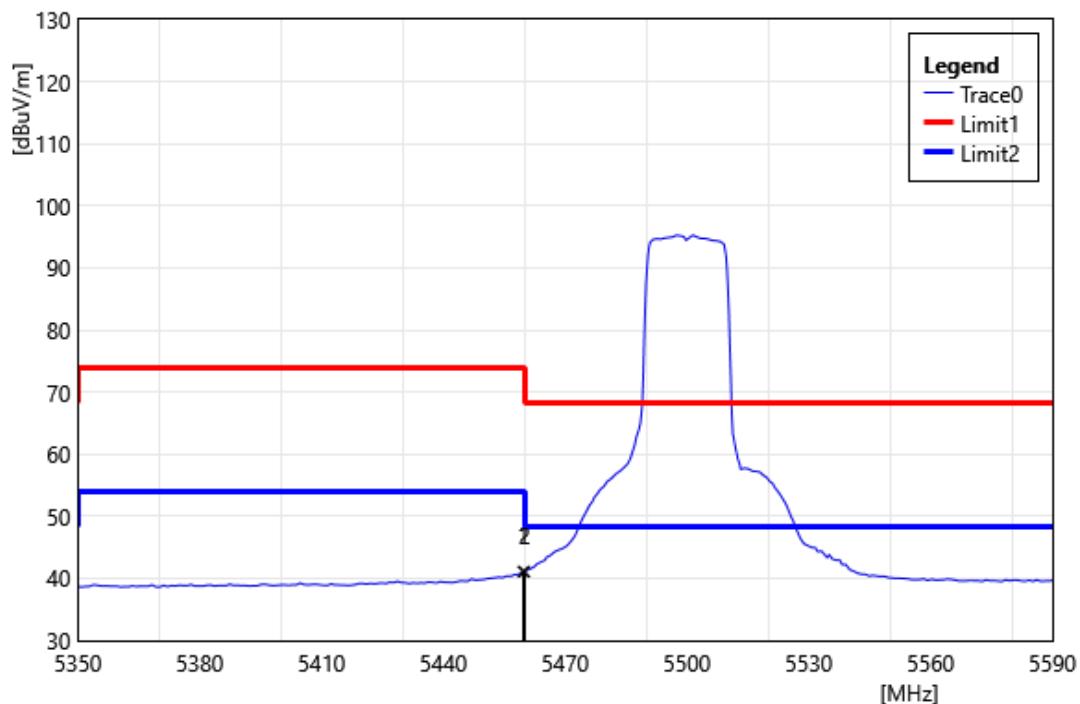


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.68	41.66	-0.57	41.09	54.00	-12.91	AVG
2	5460.00	41.67	-0.57	41.10	54.00	-12.90	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

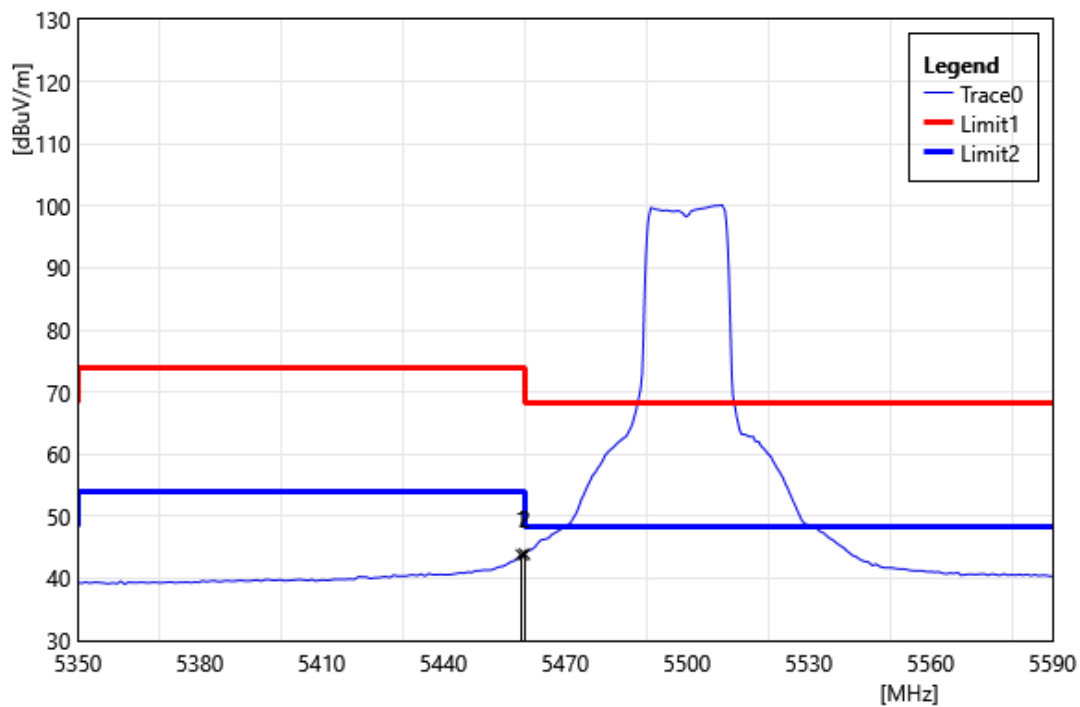


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	44.37	-0.57	43.80	54.00	-10.20	AVG
2	5460.00	44.47	-0.57	43.90	54.00	-10.10	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

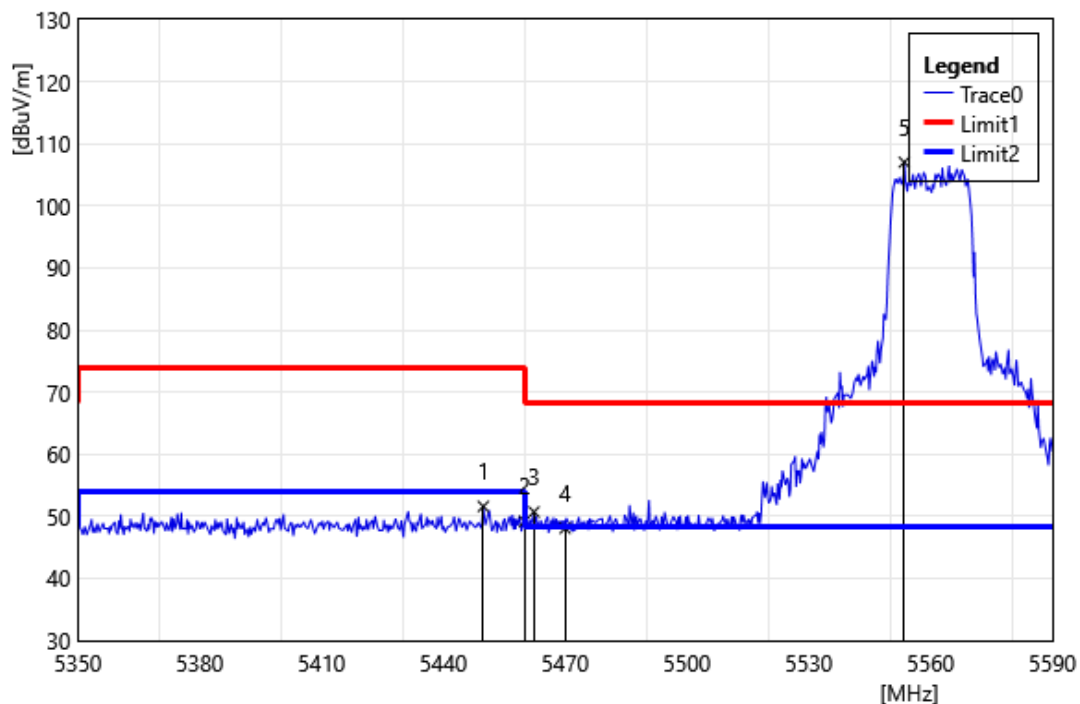


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5449.84	52.19	-0.59	51.60	74.00	-22.40	PEAK
2	5460.00	49.77	-0.57	49.20	74.00	-24.80	PEAK
3	5462.32	51.28	-0.57	50.71	68.20	-17.49	PEAK
4	5470.00	48.65	-0.56	48.09	68.20	-20.11	PEAK
5	5553.52	107.53	-0.50	107.03	68.20	38.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

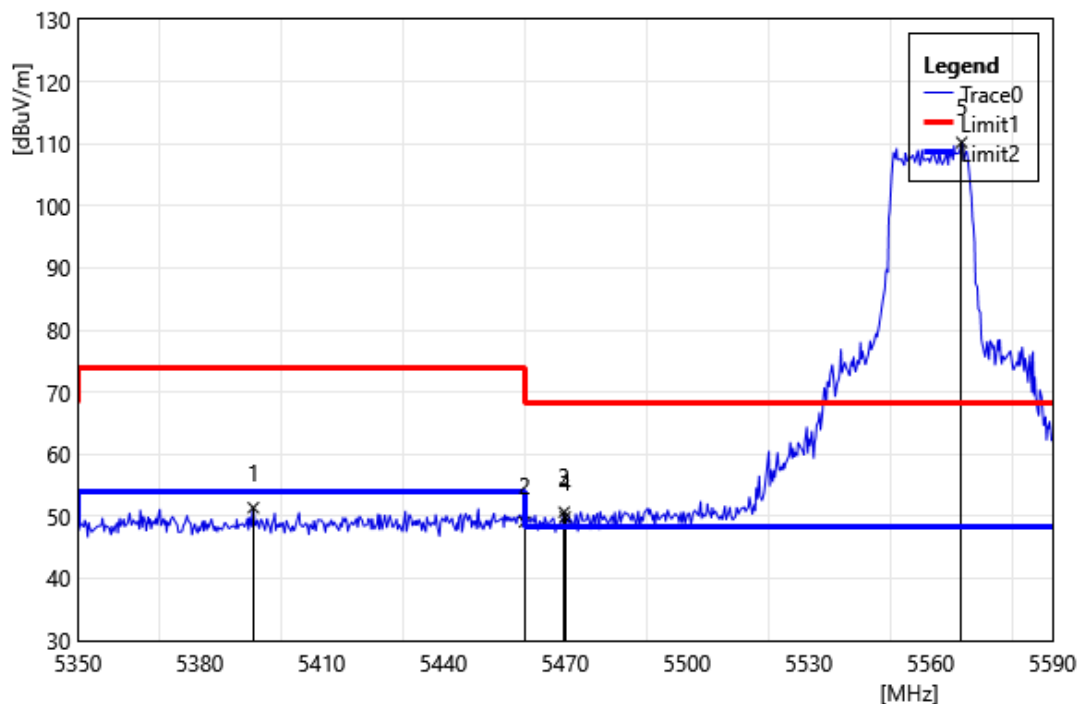


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5393.20	52.38	-0.99	51.39	74.00	-22.61	PEAK
2	5460.00	49.67	-0.57	49.10	74.00	-24.90	PEAK
3	5469.76	51.23	-0.56	50.67	68.20	-17.53	PEAK
4	5470.00	50.45	-0.56	49.89	68.20	-18.31	PEAK
5	5567.68	110.73	-0.52	110.21	68.20	42.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700 MHz		
Polarization:	Vertical		
Remark:			

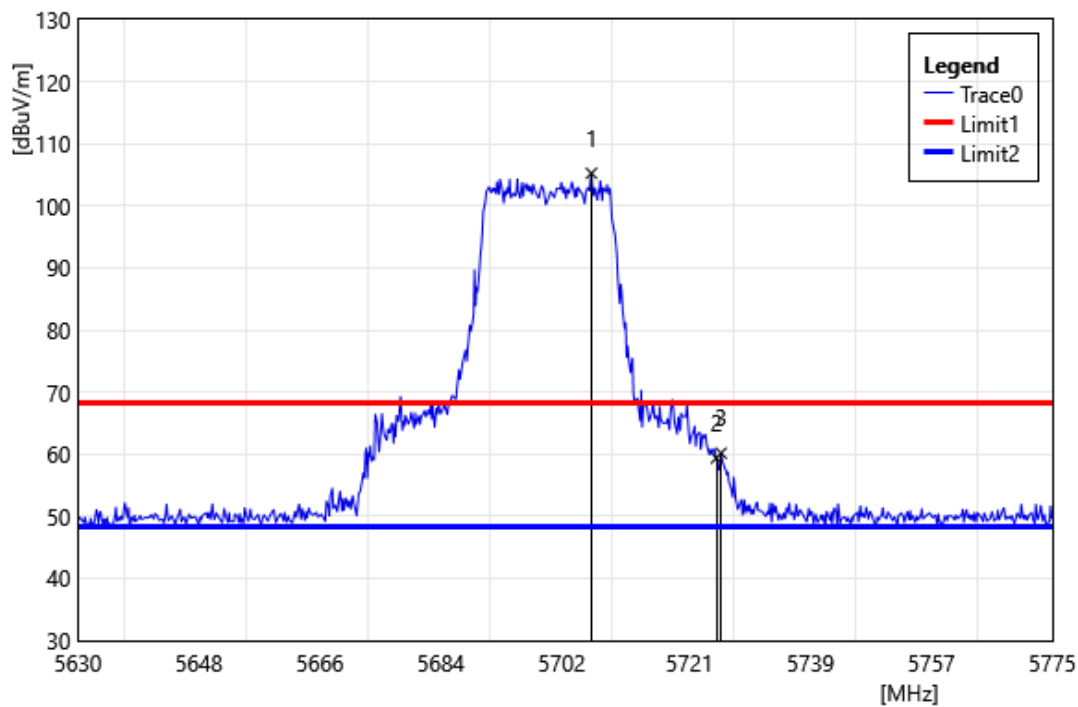


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5706.42	105.79	-0.54	105.25	68.20	37.05	PEAK
2	5725.00	59.74	-0.34	59.40	68.20	-8.80	PEAK
3	5725.70	60.52	-0.34	60.18	68.20	-8.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700 MHz		
Polarization:	Horizontal		
Remark:			

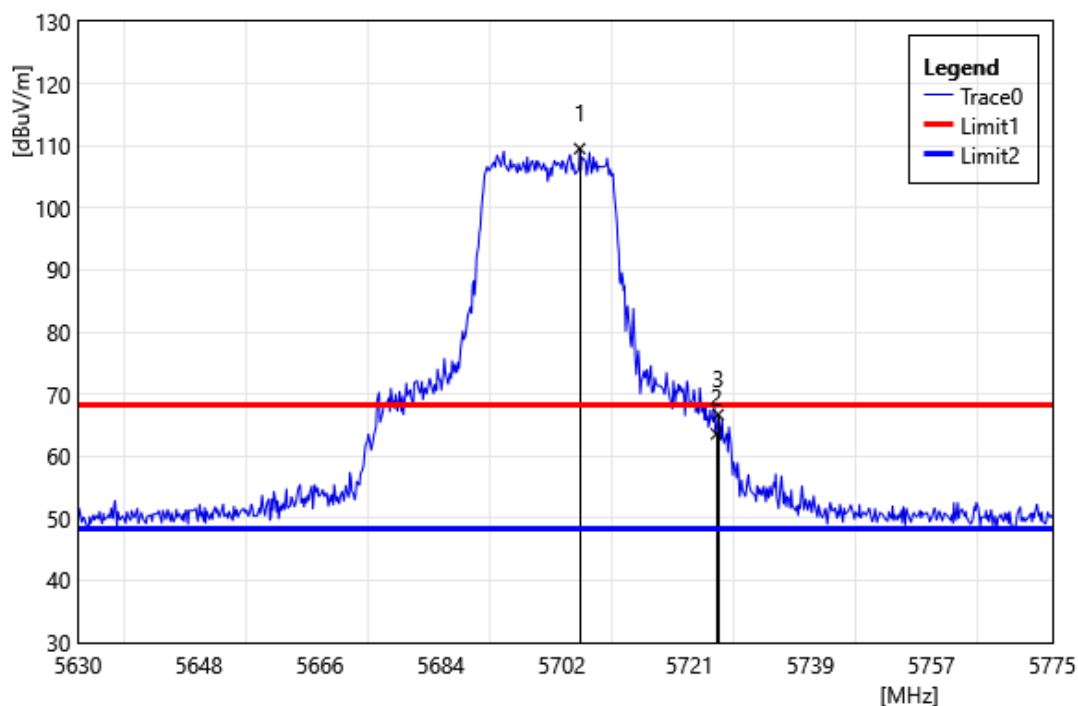


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5704.68	110.10	-0.56	109.54	68.20	41.34	PEAK
2	5725.00	63.94	-0.34	63.60	68.20	-4.60	PEAK
3	5725.27	67.04	-0.34	66.70	68.20	-1.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

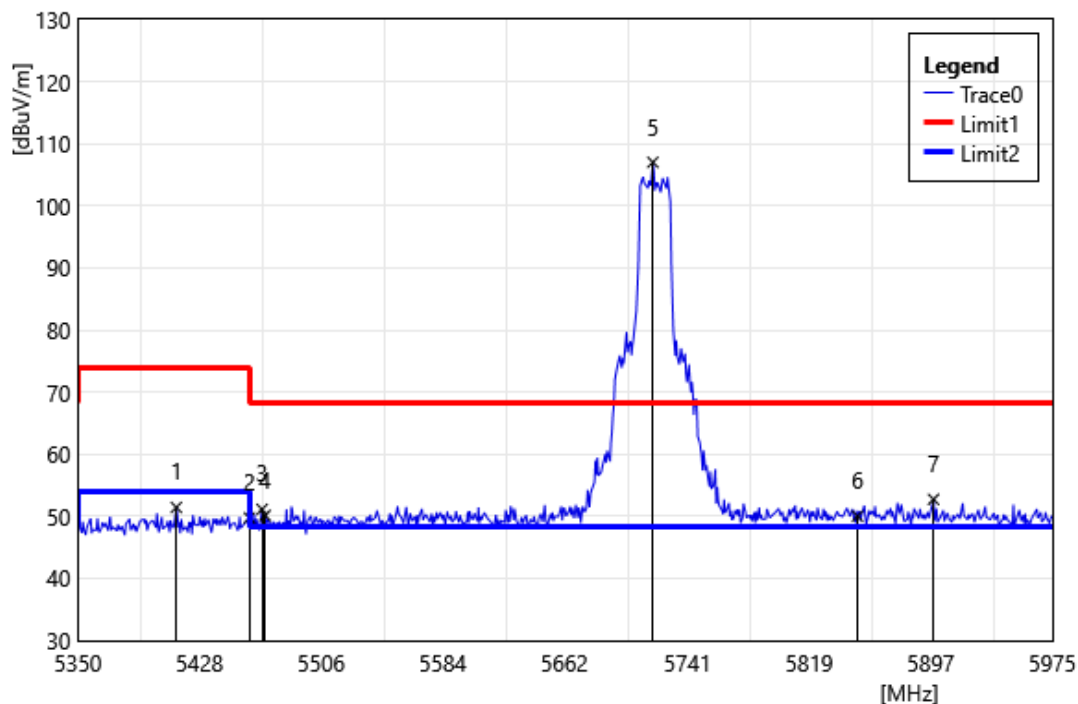


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5413.13	52.28	-0.85	51.43	74.00	-22.57	PEAK
2	5460.00	50.34	-0.57	49.77	74.00	-24.23	PEAK
3	5468.13	51.70	-0.56	51.14	68.20	-17.06	PEAK
4	5470.00	50.70	-0.56	50.14	68.20	-18.06	PEAK
5	5718.75	107.43	-0.41	107.02	68.20	38.82	PEAK
6	5850.00	49.77	0.28	50.05	68.20	-18.15	PEAK
7	5898.75	52.32	0.41	52.74	68.20	-15.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

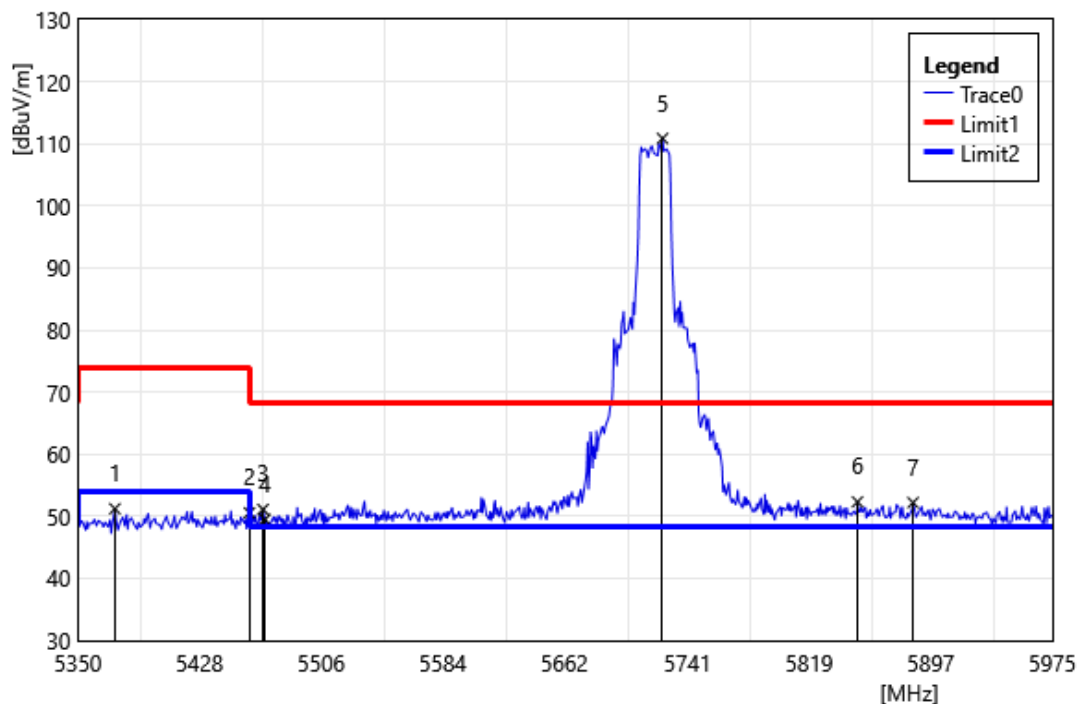


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5373.75	52.35	-1.12	51.23	74.00	-22.77	PEAK
2	5460.00	51.14	-0.57	50.57	74.00	-23.43	PEAK
3	5468.75	51.67	-0.56	51.11	68.20	-17.09	PEAK
4	5470.00	50.06	-0.56	49.50	68.20	-18.70	PEAK
5	5725.00	111.21	-0.34	110.87	68.20	42.67	PEAK
6	5850.00	52.05	0.28	52.33	68.20	-15.87	PEAK
7	5885.63	51.84	0.37	52.21	68.20	-15.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

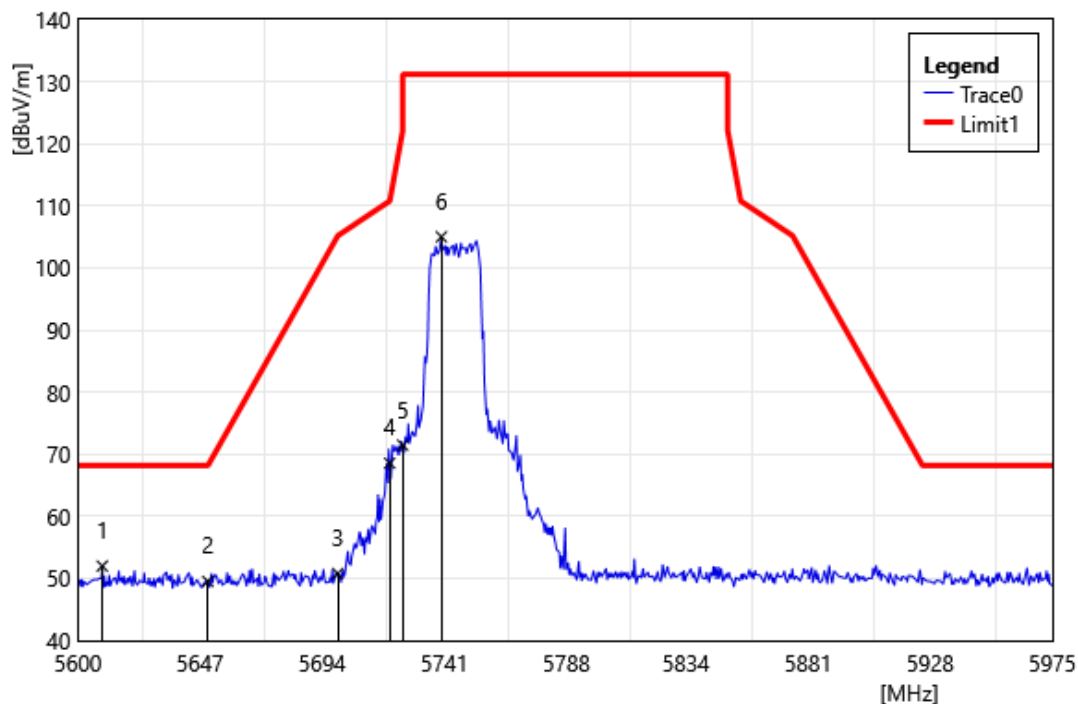


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5609.38	52.57	-0.58	51.99	68.20	-16.21	PEAK
2	5650.00	50.17	-0.64	49.53	68.20	-18.67	PEAK
3	5700.00	51.42	-0.61	50.81	105.20	-54.39	PEAK
4	5720.00	68.96	-0.40	68.56	110.80	-42.24	PEAK
5	5725.00	71.79	-0.34	71.45	122.20	-50.75	PEAK
6	5739.88	105.21	-0.19	105.02	131.20	-26.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

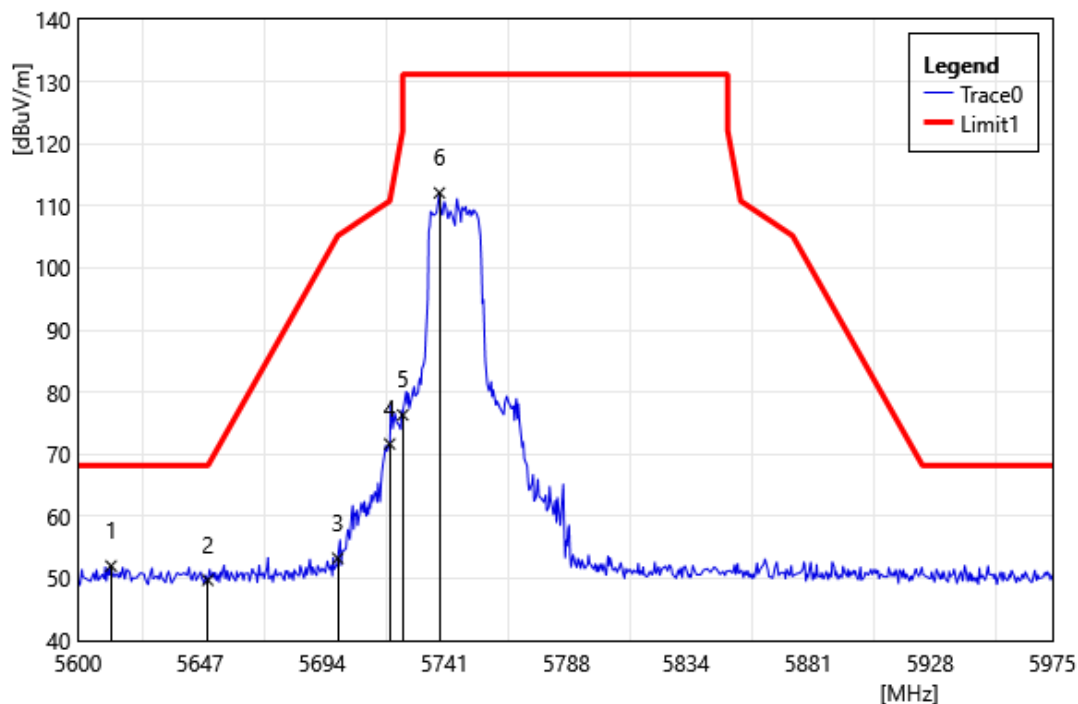


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5612.75	52.60	-0.59	52.01	68.20	-16.19	PEAK
2	5650.00	50.37	-0.64	49.73	68.20	-18.47	PEAK
3	5700.00	53.86	-0.61	53.25	105.20	-51.95	PEAK
4	5720.00	72.07	-0.40	71.67	110.80	-39.13	PEAK
5	5725.00	76.68	-0.34	76.34	122.20	-45.86	PEAK
6	5739.13	112.29	-0.20	112.09	131.20	-19.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

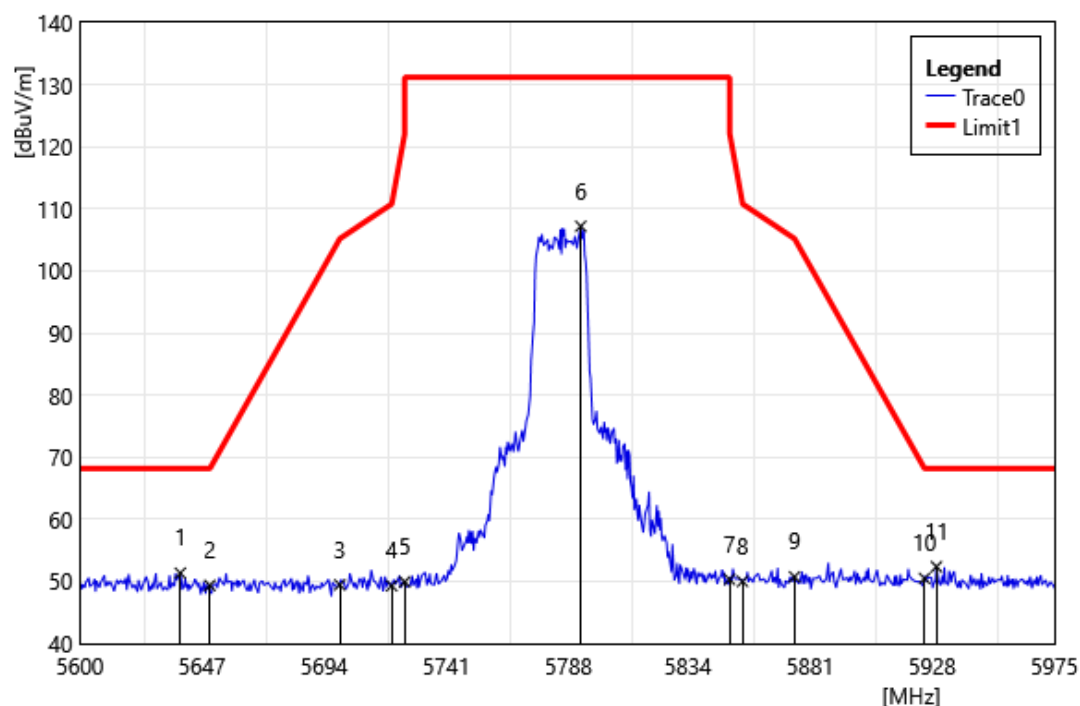


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5638.63	51.97	-0.62	51.35	68.20	-16.85	PEAK
2	5650.00	50.00	-0.64	49.36	68.20	-18.84	PEAK
3	5700.00	50.06	-0.61	49.45	105.20	-55.75	PEAK
4	5720.00	49.69	-0.40	49.29	110.80	-61.51	PEAK
5	5725.00	50.28	-0.34	49.94	122.20	-72.26	PEAK
6	5792.75	107.08	0.12	107.20	131.20	-24.00	PEAK
7	5850.00	50.06	0.28	50.34	122.20	-71.86	PEAK
8	5855.00	49.73	0.29	50.02	110.80	-60.78	PEAK
9	5875.00	50.40	0.34	50.74	105.20	-54.46	PEAK
10	5925.00	50.22	0.28	50.50	68.20	-17.70	PEAK
11	5929.63	52.12	0.25	52.37	68.20	-15.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

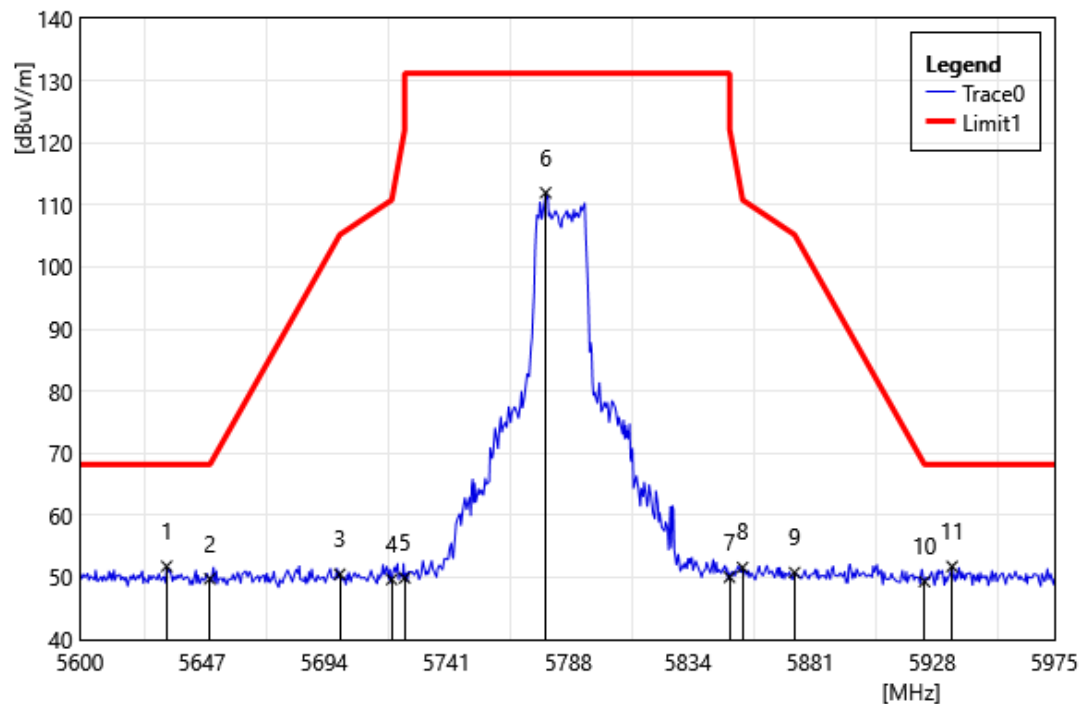


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.38	52.42	-0.62	51.80	68.20	-16.41	PEAK
2	5650.00	50.42	-0.64	49.78	68.20	-18.42	PEAK
3	5700.00	51.12	-0.61	50.51	105.20	-54.69	PEAK
4	5720.00	50.08	-0.40	49.68	110.80	-61.12	PEAK
5	5725.00	50.28	-0.34	49.94	122.20	-72.26	PEAK
6	5779.25	111.91	0.05	111.96	131.20	-19.24	PEAK
7	5850.00	49.77	0.28	50.05	122.20	-72.15	PEAK
8	5855.00	51.31	0.29	51.60	110.80	-59.20	PEAK
9	5875.00	50.45	0.34	50.79	105.20	-54.41	PEAK
10	5925.00	49.05	0.28	49.33	68.20	-18.87	PEAK
11	5935.63	51.54	0.22	51.76	68.20	-16.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

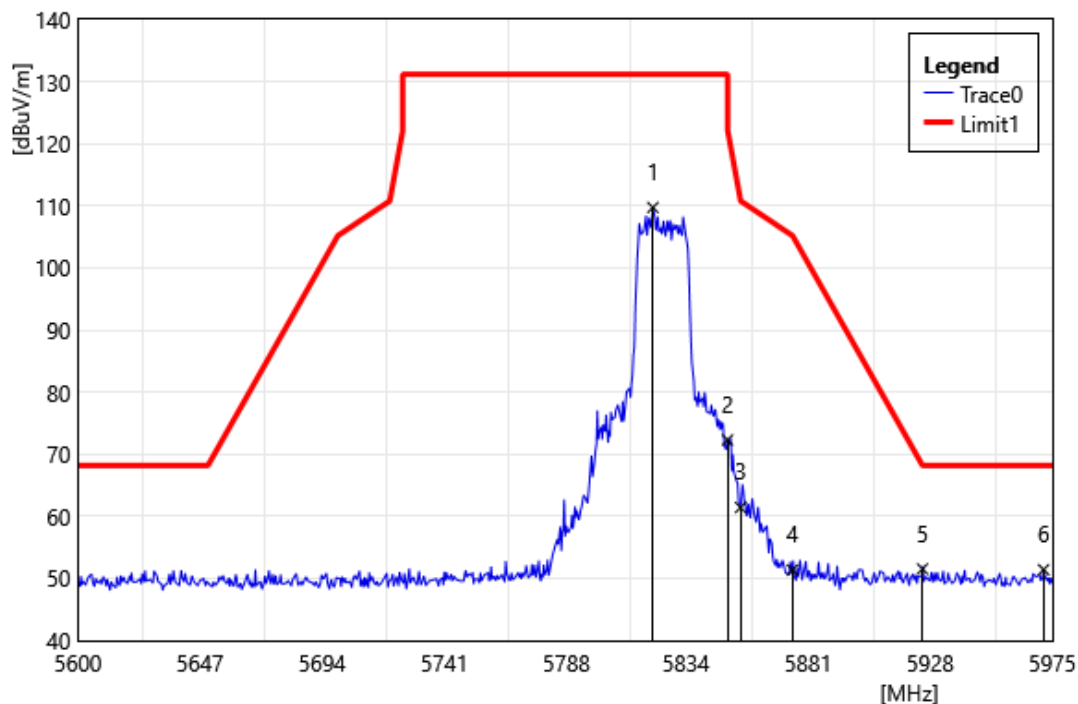


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5821.25	109.54	0.21	109.75	131.20	-21.45	PEAK
2	5850.00	72.03	0.28	72.31	122.20	-49.89	PEAK
3	5855.00	61.15	0.29	61.44	110.80	-49.36	PEAK
4	5875.00	51.03	0.34	51.37	105.20	-53.83	PEAK
5	5925.00	51.24	0.28	51.52	68.20	-16.68	PEAK
6	5971.63	51.21	0.20	51.41	68.20	-16.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

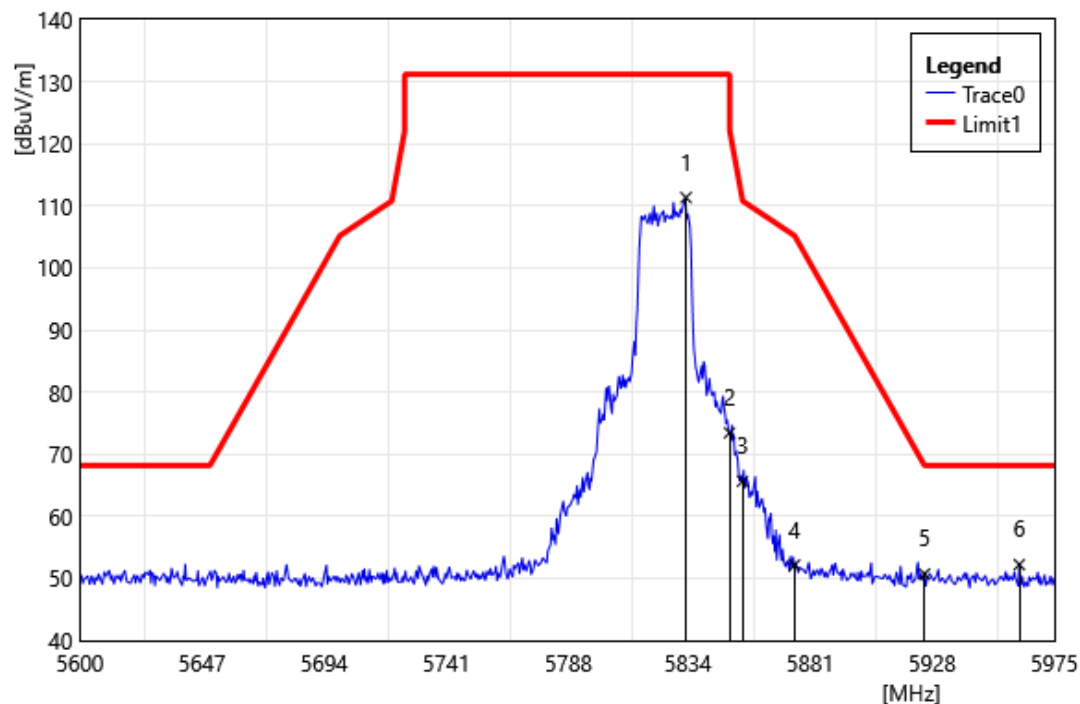


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5833.25	111.11	0.24	111.35	131.20	-19.85	PEAK
2	5850.00	73.17	0.28	73.45	122.20	-48.75	PEAK
3	5855.00	65.37	0.29	65.66	110.80	-45.14	PEAK
4	5875.00	51.81	0.34	52.15	105.20	-53.05	PEAK
5	5925.00	50.42	0.28	50.70	68.20	-17.50	PEAK
6	5961.50	52.06	0.17	52.23	68.20	-15.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

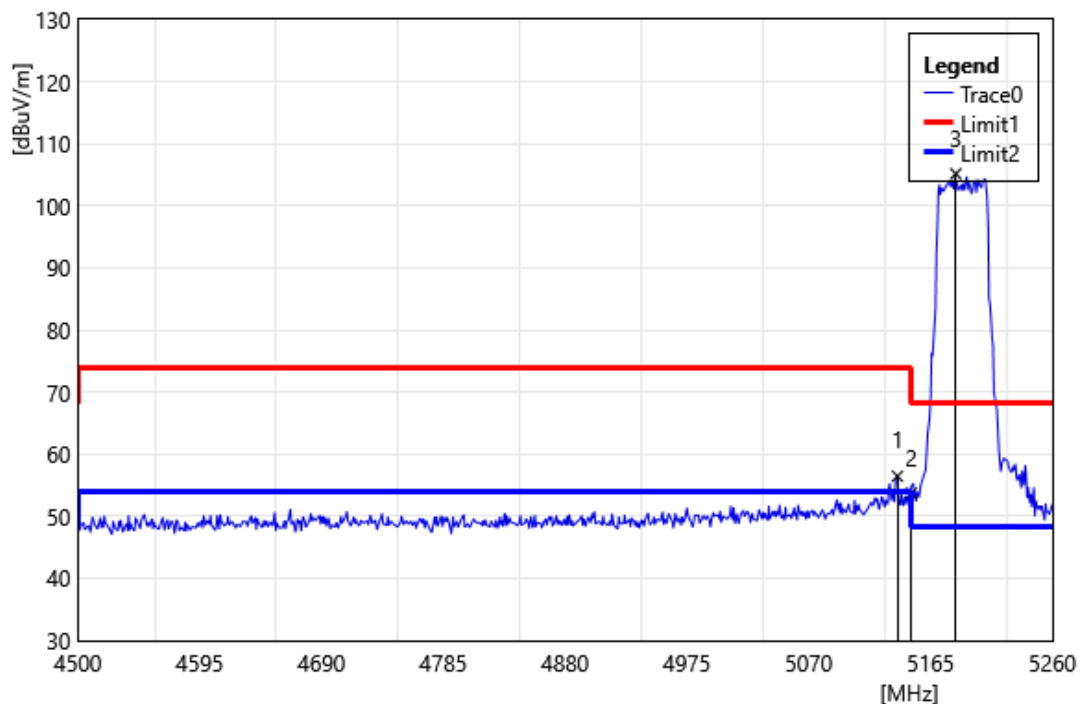


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.16	57.37	-0.90	56.47	74.00	-17.53	PEAK
2	5150.00	54.64	-0.91	53.73	74.00	-20.27	PEAK
3	5184.76	106.25	-1.08	105.17	68.20	36.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

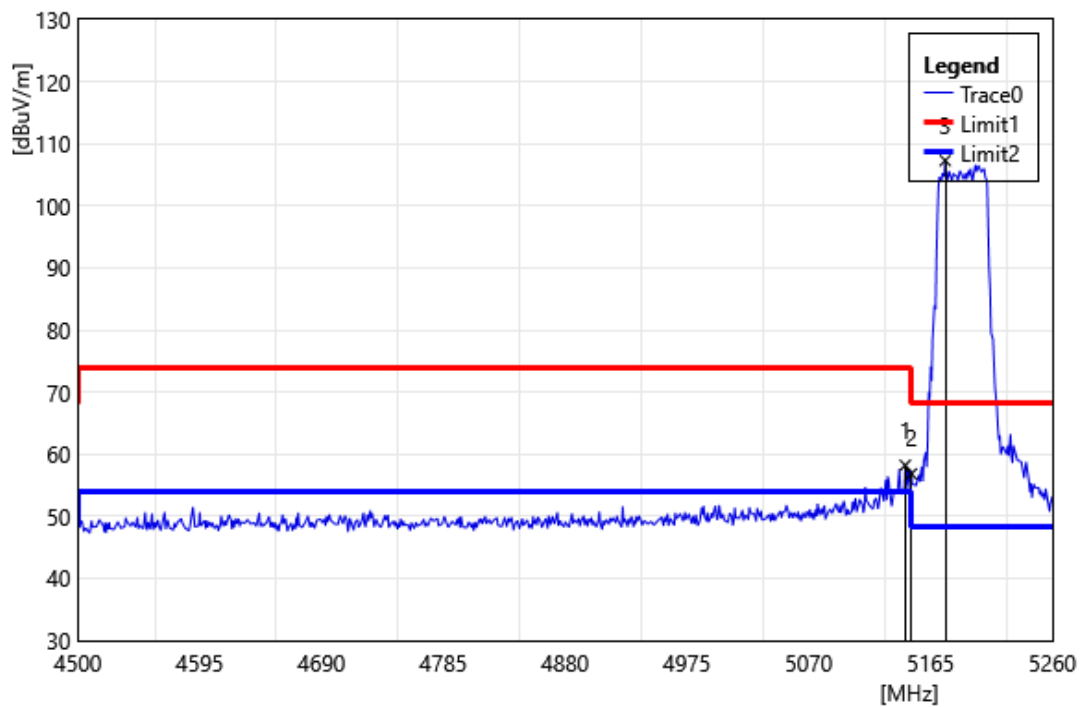


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	59.13	-0.90	58.23	74.00	-15.77	PEAK
2	5150.00	57.75	-0.91	56.84	74.00	-17.16	PEAK
3	5176.40	108.34	-1.04	107.30	68.20	39.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

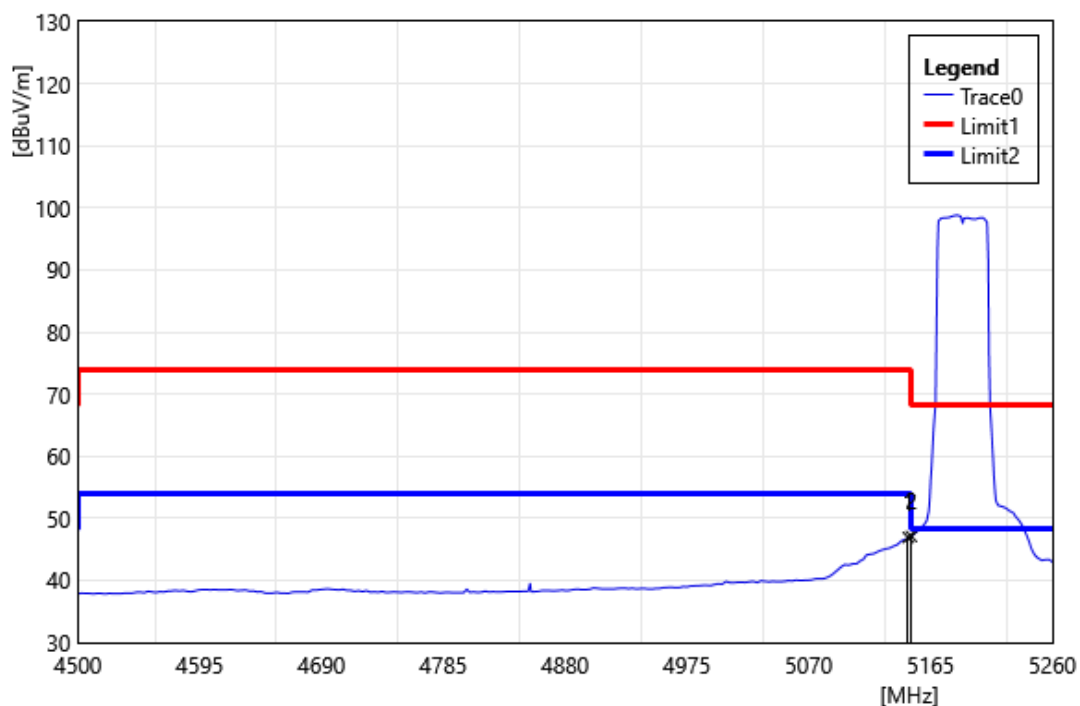


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	47.82	-0.91	46.91	54.00	-7.09	AVG
2	5150.00	47.99	-0.91	47.08	54.00	-6.92	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

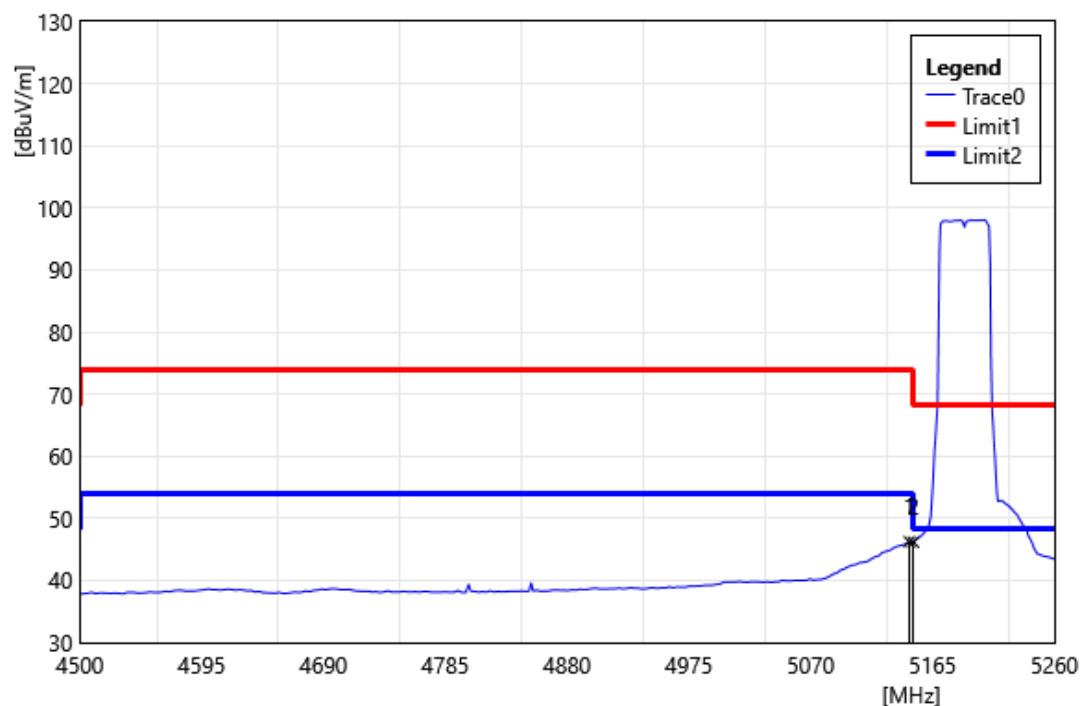


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	47.14	-0.90	46.24	54.00	-7.76	AVG
2	5150.00	47.08	-0.91	46.17	54.00	-7.83	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

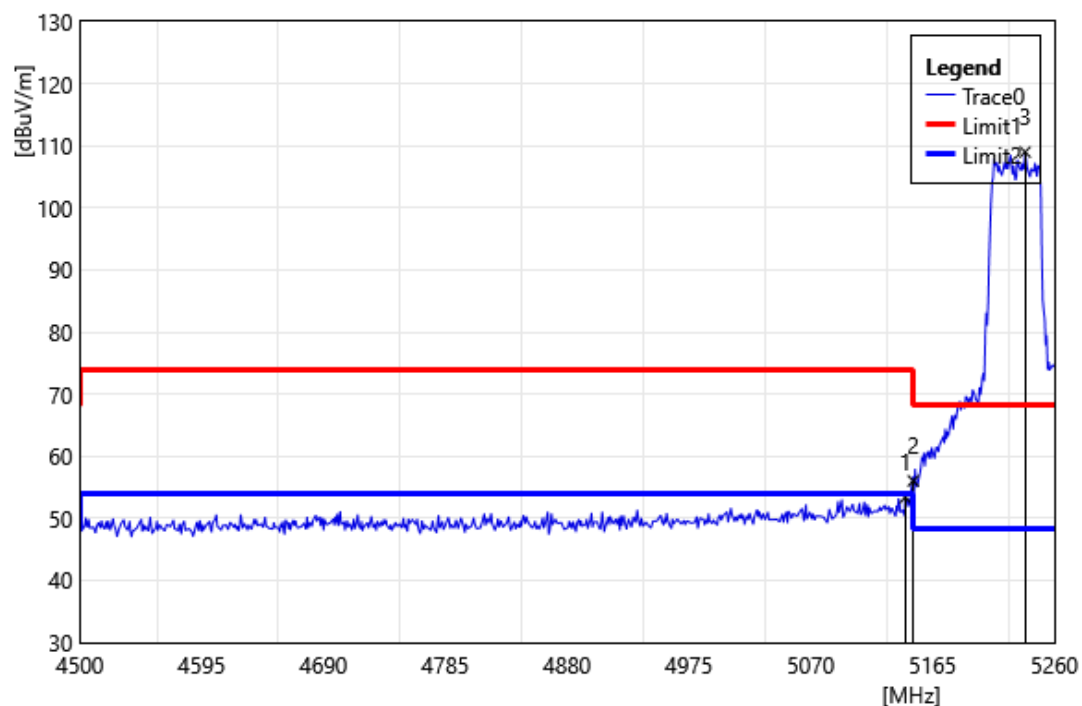


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	54.28	-0.90	53.38	74.00	-20.62	PEAK
2	5150.00	56.95	-0.91	56.04	74.00	-17.96	PEAK
3	5237.20	110.40	-1.41	108.99	68.20	40.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

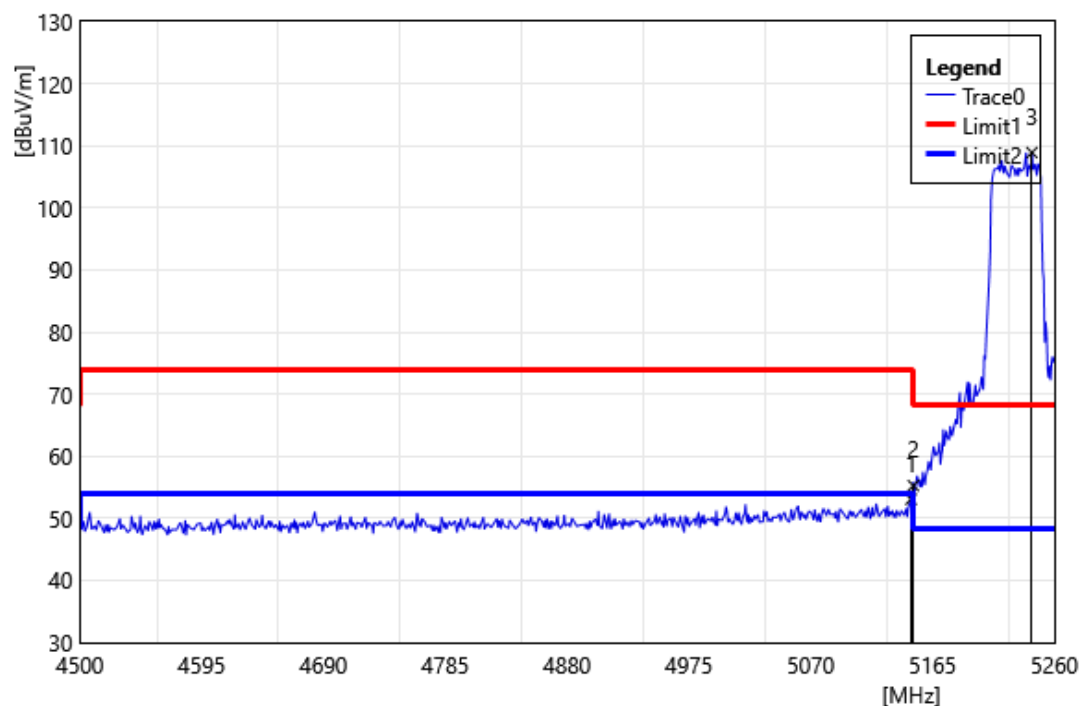


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	53.99	-0.91	53.08	74.00	-20.92	PEAK
2	5150.00	56.18	-0.91	55.27	74.00	-18.73	PEAK
3	5242.52	110.37	-1.45	108.92	68.20	40.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

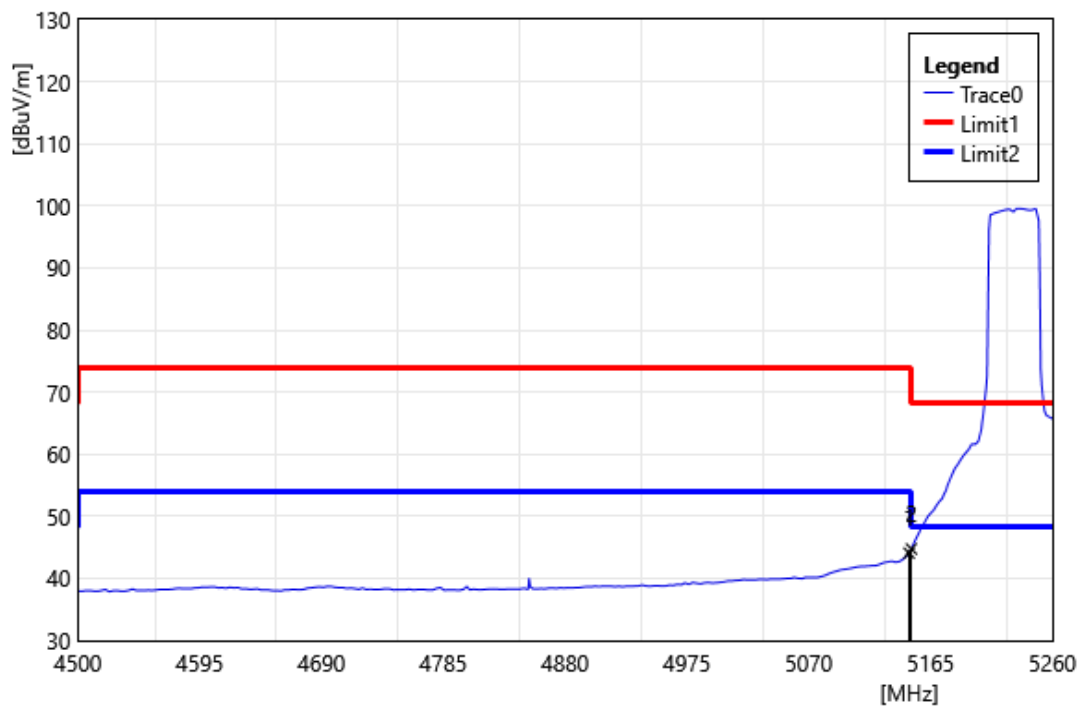


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	44.99	-0.91	44.08	54.00	-9.92	AVG
2	5150.00	45.66	-0.91	44.76	54.00	-9.24	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

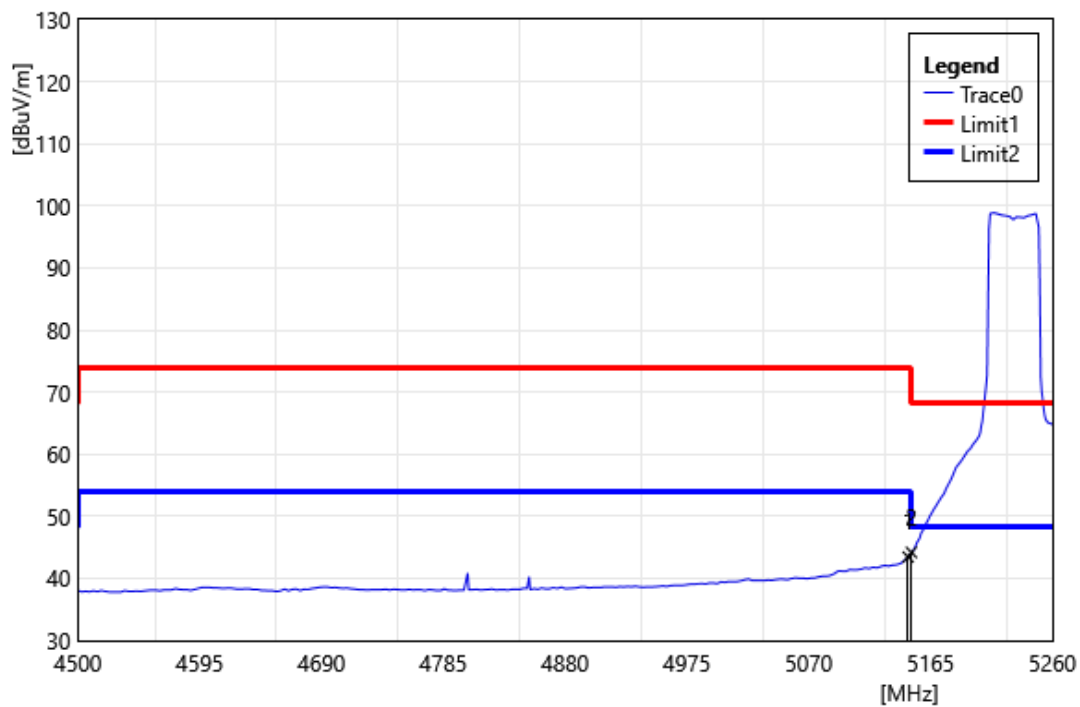


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	44.36	-0.91	43.45	54.00	-10.55	AVG
2	5150.00	45.11	-0.91	44.20	54.00	-9.80	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

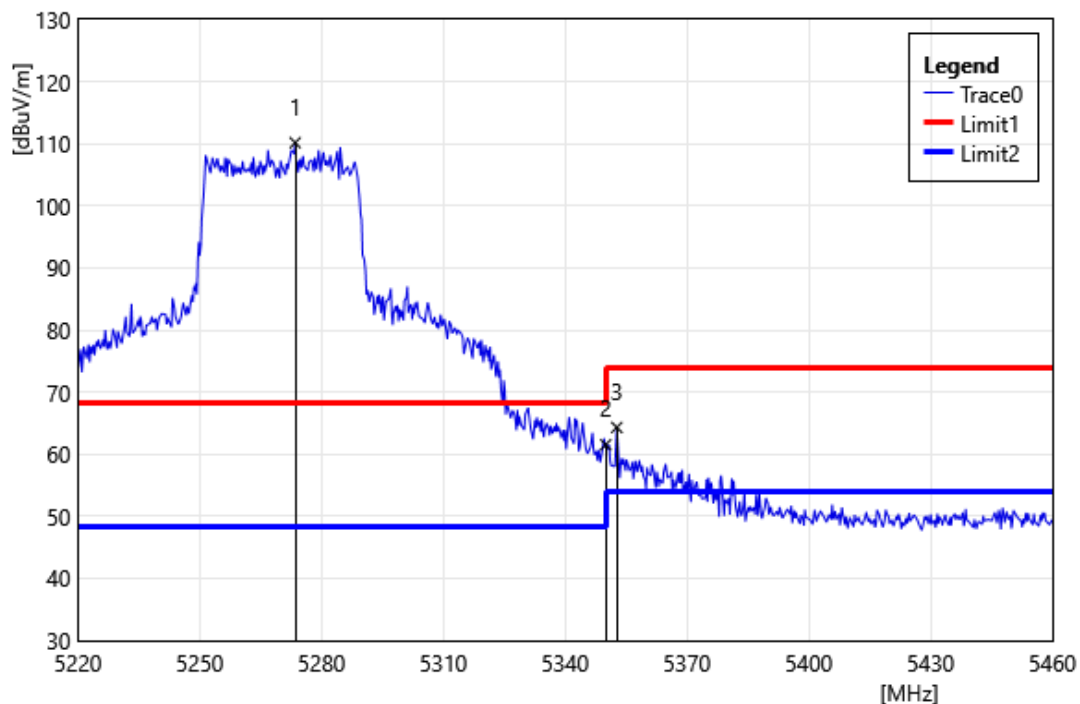


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5273.52	111.74	-1.57	110.17	68.20	41.97	PEAK
2	5350.00	62.82	-1.29	61.53	74.00	-12.47	PEAK
3	5352.72	65.59	-1.27	64.32	74.00	-9.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

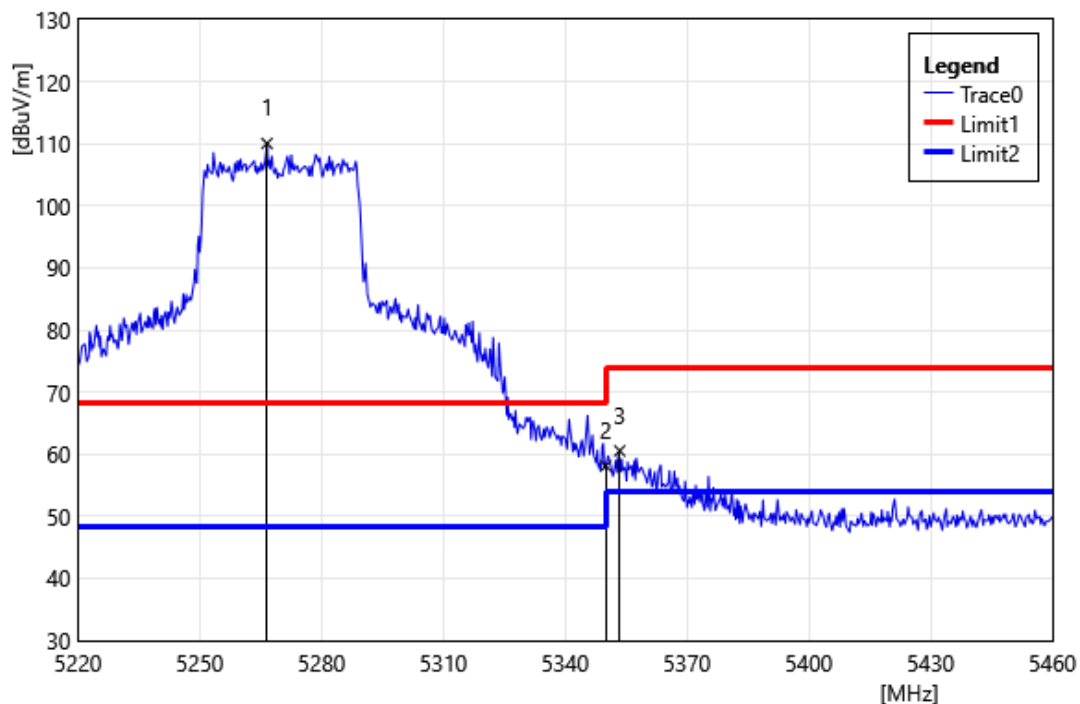


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5266.56	111.60	-1.55	110.05	68.20	41.85	PEAK
2	5350.00	59.43	-1.29	58.13	74.00	-15.87	PEAK
3	5353.44	61.82	-1.27	60.55	74.00	-13.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

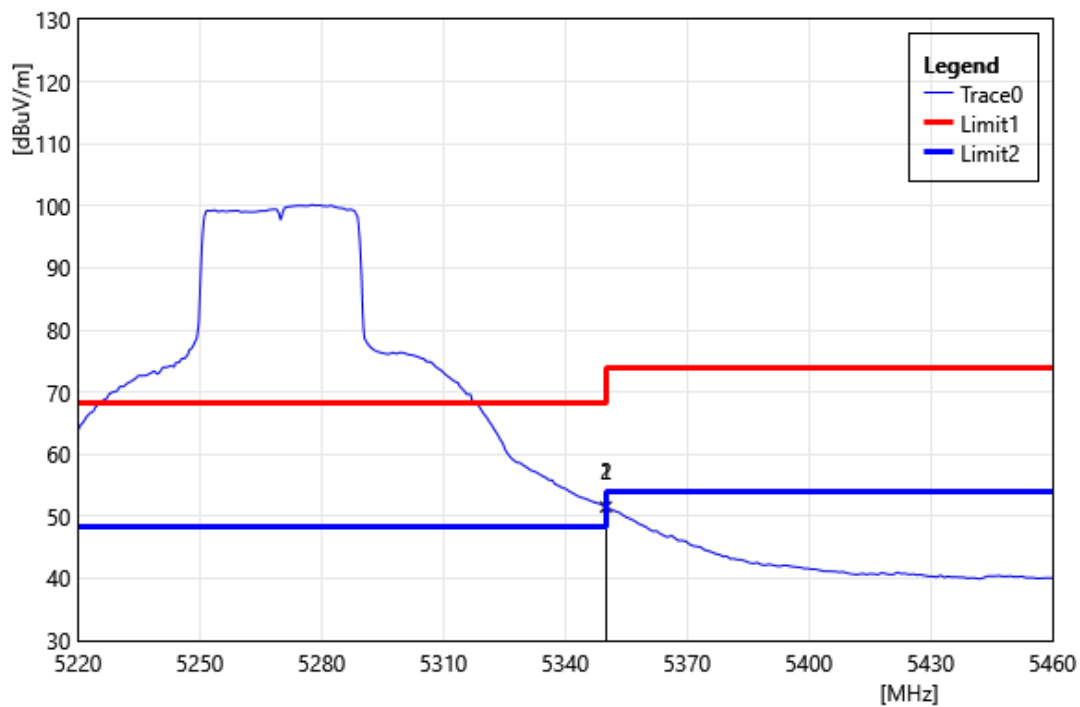


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	52.83	-1.29	51.54	54.00	-2.46	AVG
2	5350.08	52.78	-1.29	51.50	54.00	-2.51	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

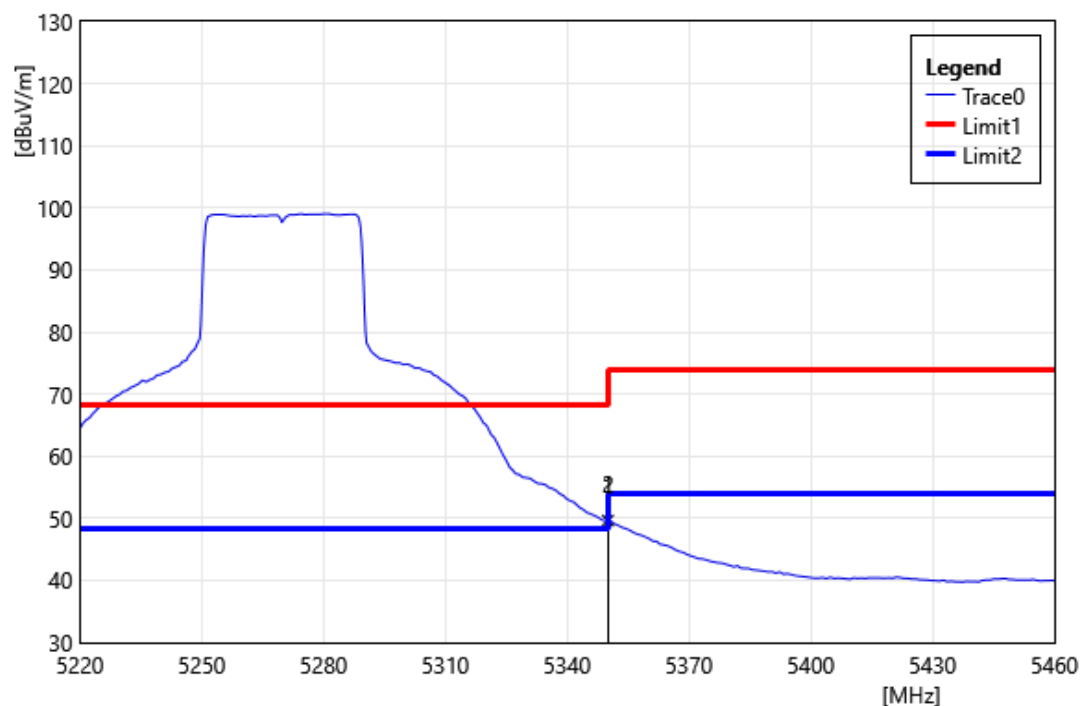


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	50.90	-1.29	49.61	54.00	-4.39	AVG
2	5350.08	50.96	-1.29	49.67	54.00	-4.33	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

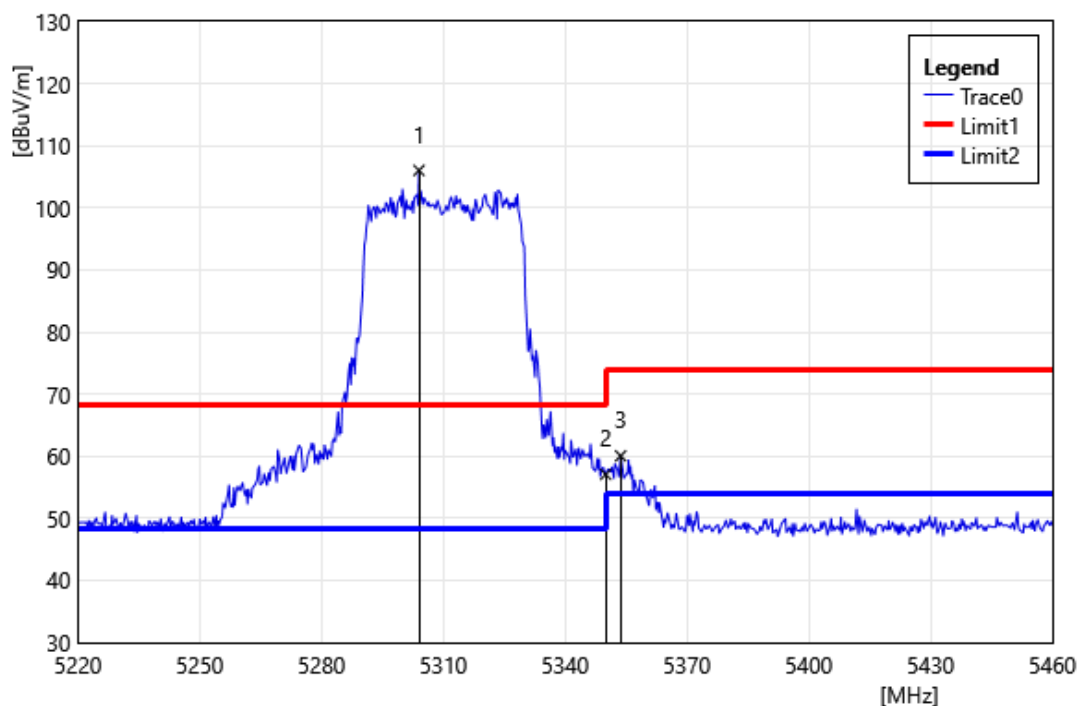


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5304.00	107.65	-1.62	106.03	68.20	37.83	PEAK
2	5350.00	58.36	-1.29	57.07	74.00	-16.93	PEAK
3	5353.68	61.32	-1.27	60.06	74.00	-13.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

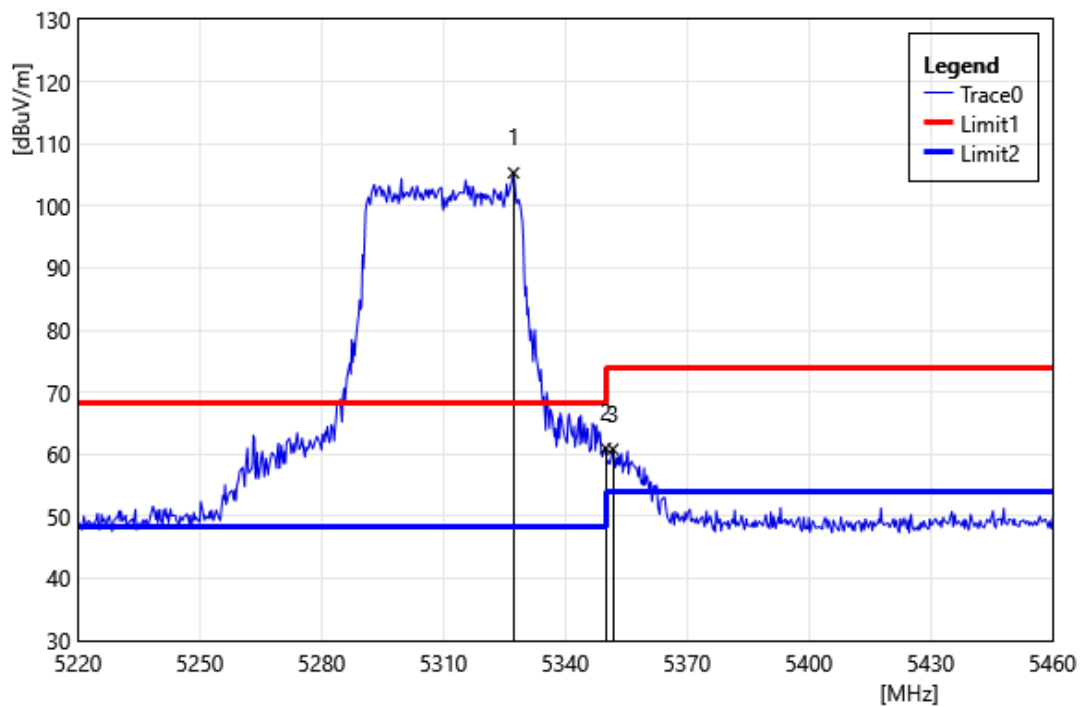


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5327.28	106.77	-1.45	105.32	68.20	37.12	PEAK
2	5350.00	62.27	-1.29	60.98	74.00	-13.02	PEAK
3	5351.76	62.09	-1.28	60.81	74.00	-13.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

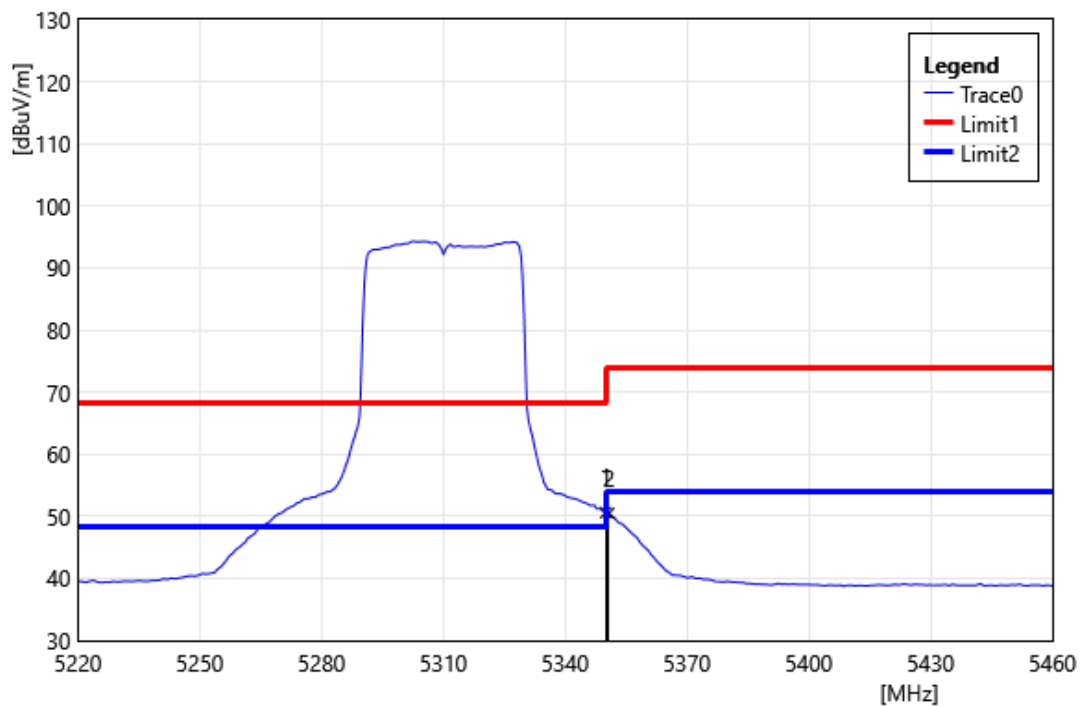


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	51.91	-1.29	50.62	54.00	-3.38	AVG
2	5350.80	51.78	-1.29	50.49	54.00	-3.51	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

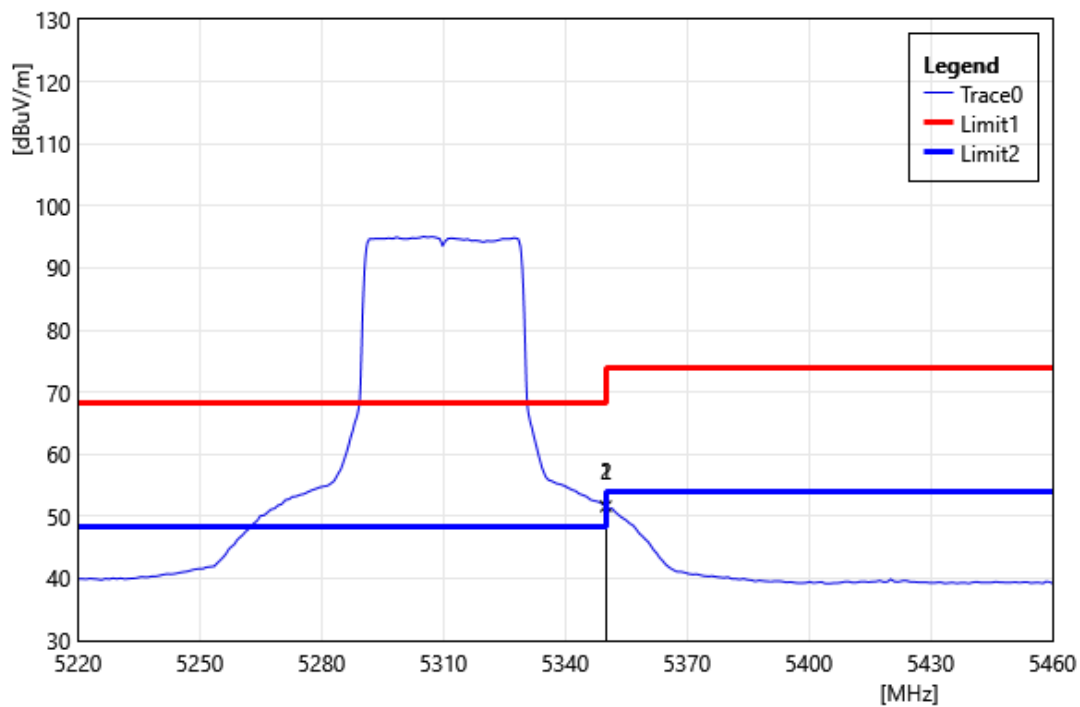


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	52.91	-1.29	51.62	54.00	-2.38	AVG
2	5350.08	52.92	-1.29	51.63	54.00	-2.37	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

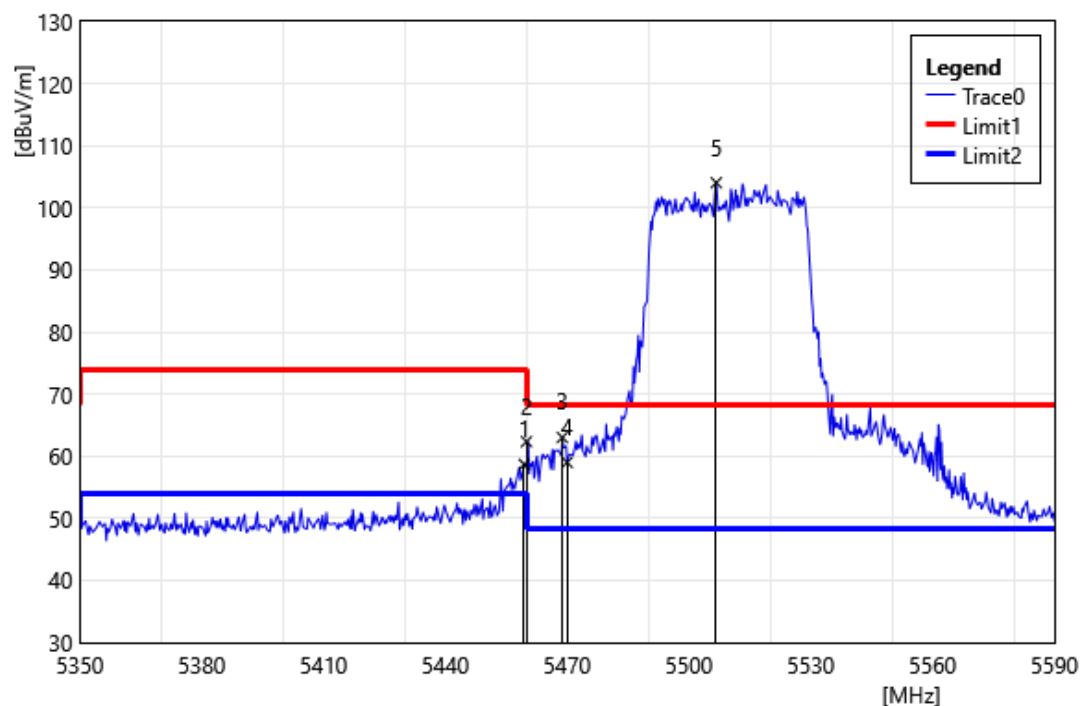


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.44	59.26	-0.57	58.69	74.00	-15.31	PEAK
2	5460.00	62.92	-0.57	62.35	68.20	-5.85	PEAK
3	5468.80	63.58	-0.56	63.03	68.20	-5.18	PEAK
4	5470.00	59.57	-0.56	59.01	68.20	-9.19	PEAK
5	5506.72	104.58	-0.53	104.05	68.20	35.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

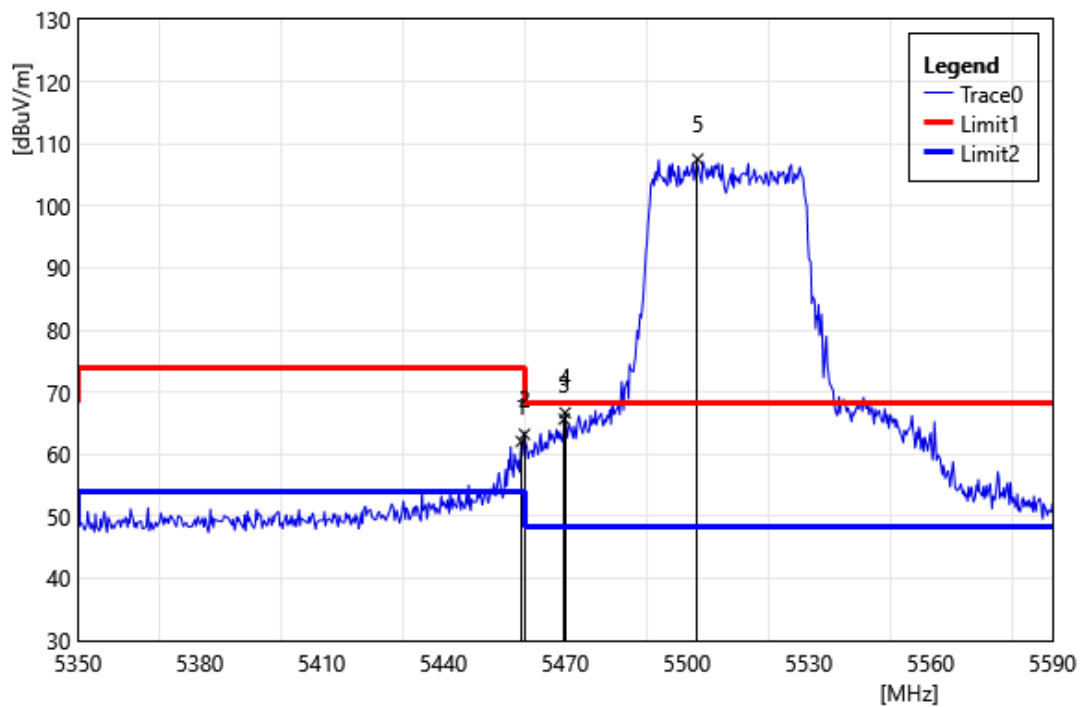


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	62.63	-0.57	62.06	74.00	-11.94	PEAK
2	5460.00	63.77	-0.57	63.20	74.00	-10.80	PEAK
3	5469.76	66.20	-0.56	65.64	68.20	-2.56	PEAK
4	5470.00	67.24	-0.56	66.68	68.20	-1.52	PEAK
5	5502.64	108.04	-0.53	107.51	68.20	39.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

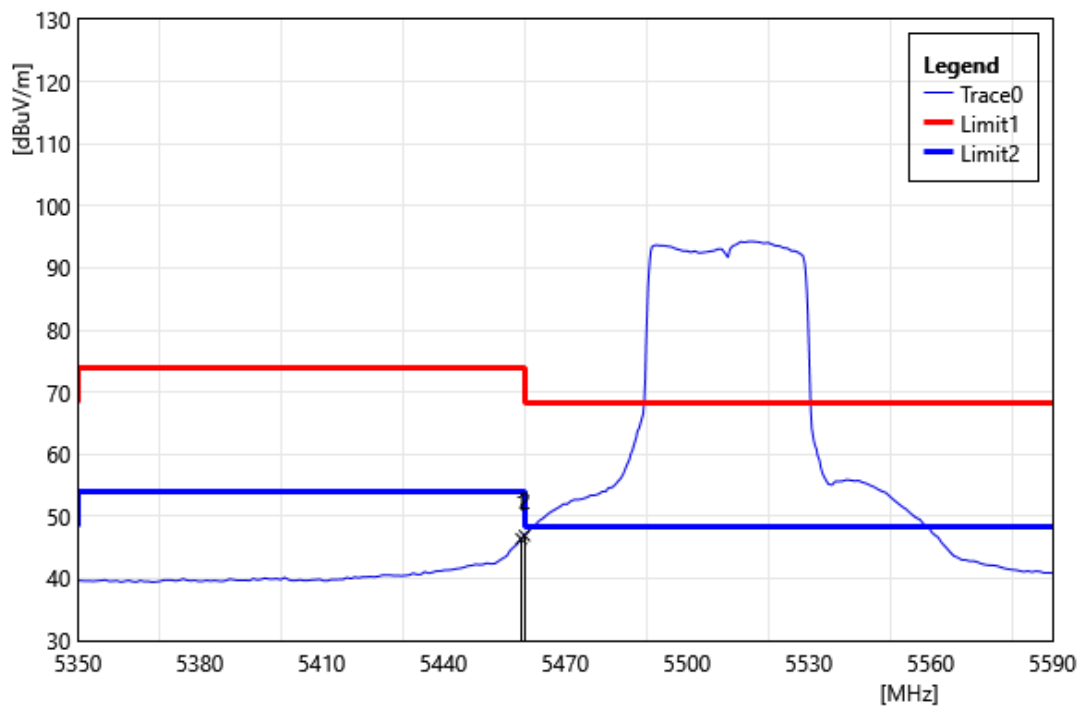


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	46.95	-0.57	46.38	54.00	-7.62	AVG
2	5460.00	47.46	-0.57	46.89	54.00	-7.11	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

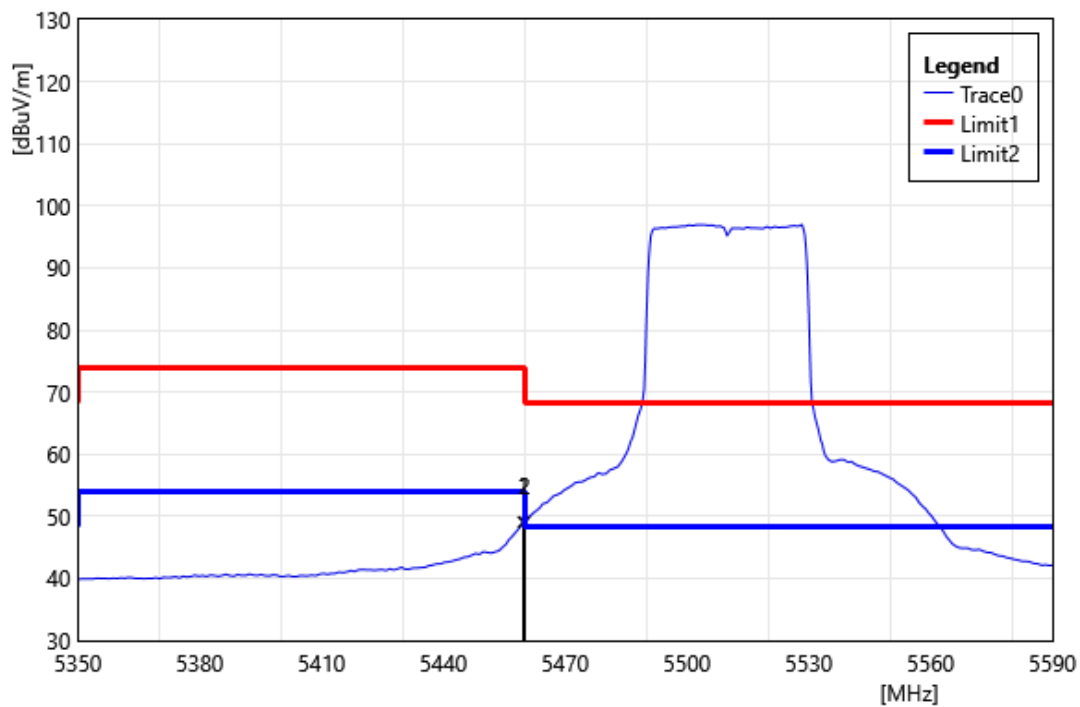


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.68	49.63	-0.57	49.06	54.00	-4.94	AVG
2	5460.00	49.68	-0.57	49.11	54.00	-4.89	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

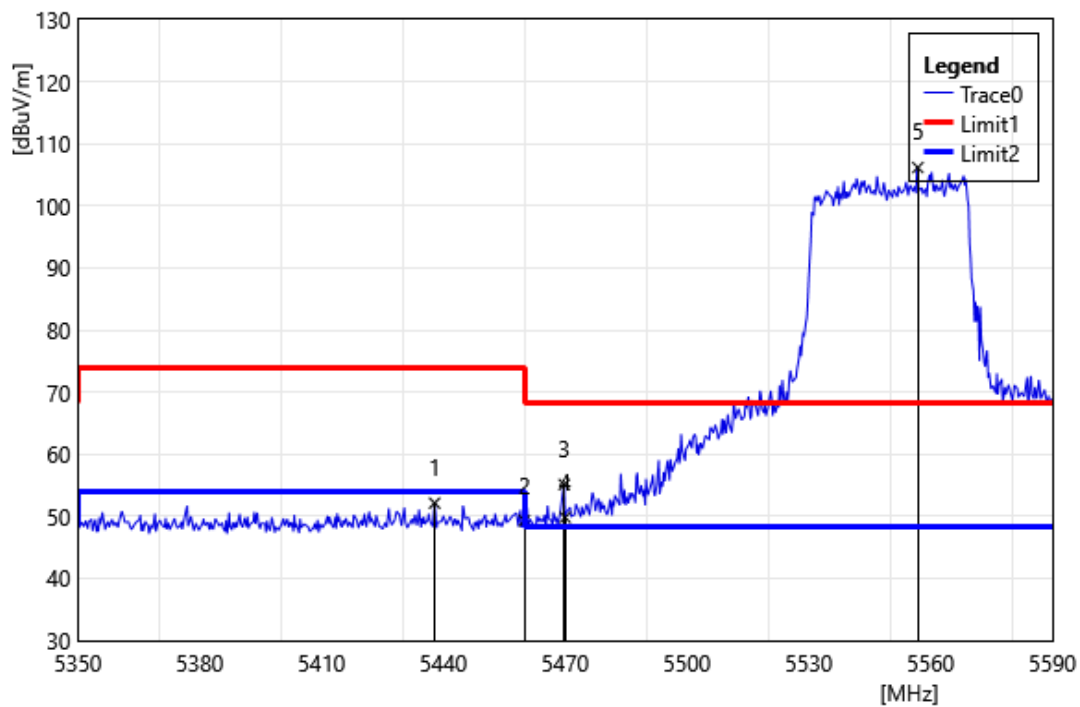


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5437.84	52.80	-0.67	52.13	74.00	-21.87	PEAK
2	5460.00	49.86	-0.57	49.29	74.00	-24.71	PEAK
3	5469.76	55.69	-0.56	55.13	68.20	-13.07	PEAK
4	5470.00	50.39	-0.56	49.83	68.20	-18.37	PEAK
5	5556.88	106.69	-0.51	106.18	68.20	37.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

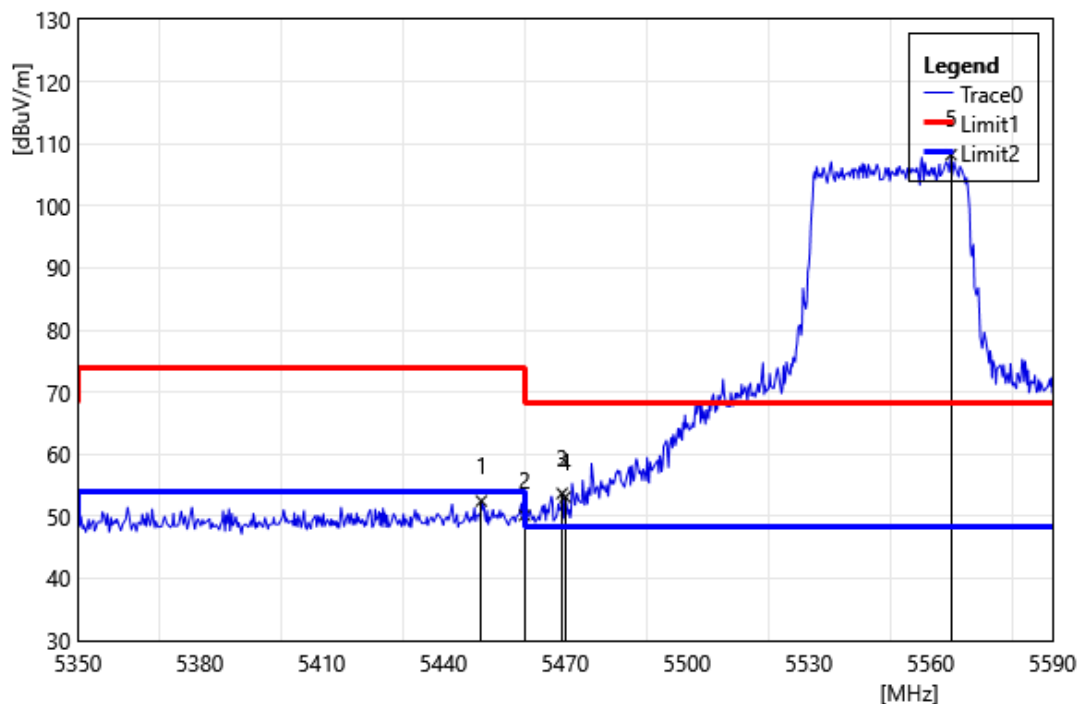


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5449.36	53.07	-0.59	52.48	74.00	-21.52	PEAK
2	5460.00	50.73	-0.57	50.16	74.00	-23.84	PEAK
3	5469.28	54.24	-0.56	53.68	68.20	-14.52	PEAK
4	5470.00	53.68	-0.56	53.12	68.20	-15.08	PEAK
5	5565.04	108.75	-0.52	108.23	68.20	40.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550 MHz		
Polarization:	Vertical		
Remark:			

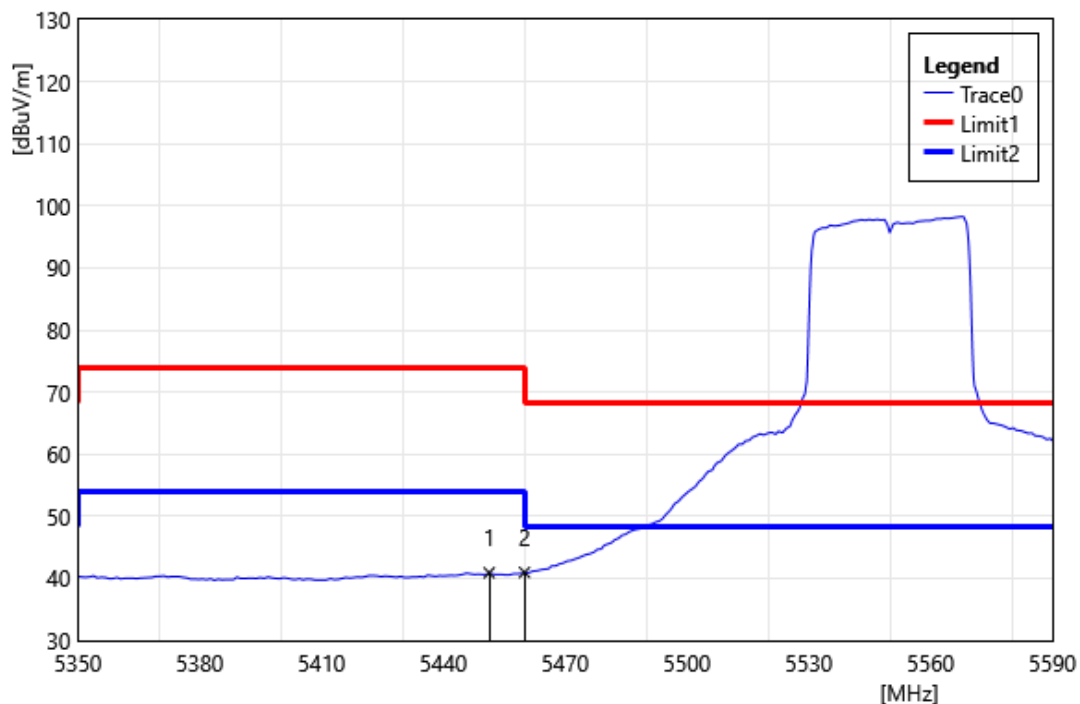


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.28	41.50	-0.58	40.92	54.00	-13.09	AVG
2	5460.00	41.54	-0.57	40.97	54.00	-13.03	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

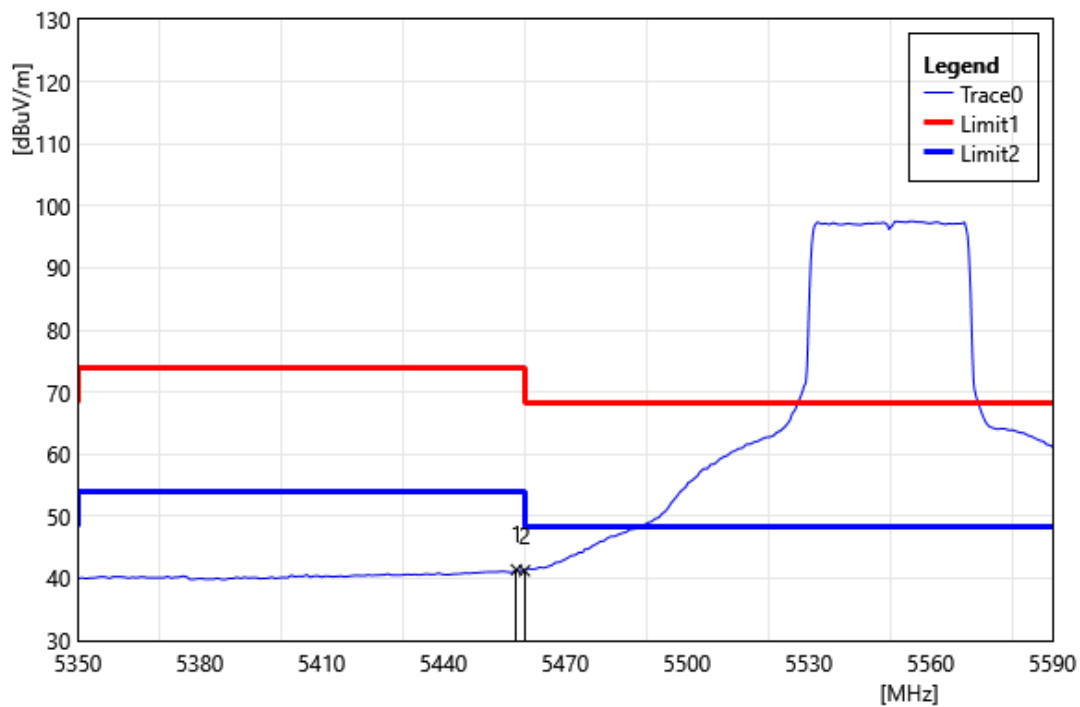


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	41.98	-0.58	41.40	54.00	-12.60	AVG
2	5460.00	41.81	-0.57	41.24	54.00	-12.76	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

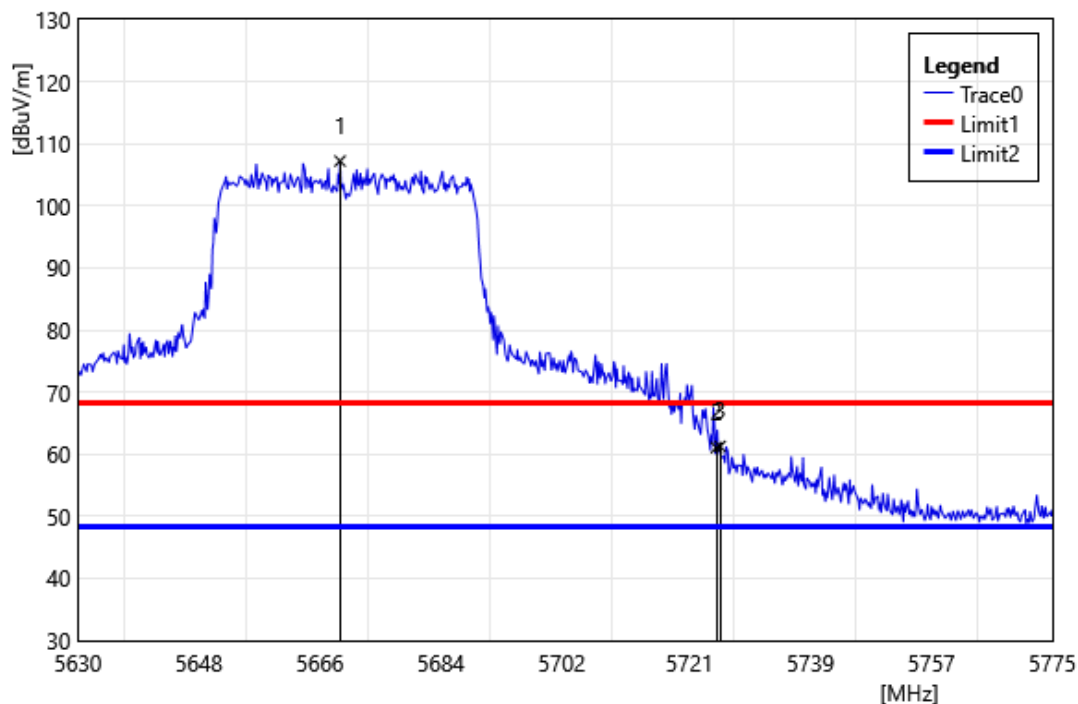


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5669.01	107.85	-0.63	107.22	68.20	39.02	PEAK
2	5725.00	61.42	-0.34	61.08	68.20	-7.12	PEAK
3	5725.56	61.62	-0.34	61.28	68.20	-6.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

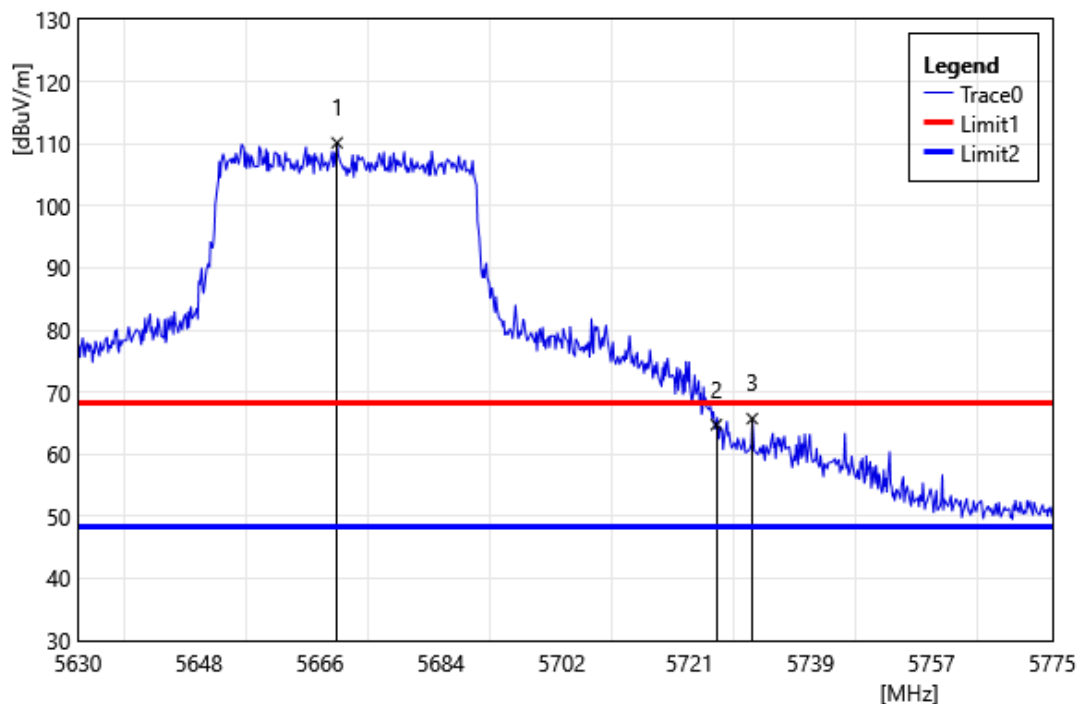


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5668.57	110.80	-0.63	110.17	68.20	41.97	PEAK
2	5725.00	65.10	-0.34	64.76	68.20	-3.44	PEAK
3	5730.34	66.03	-0.29	65.74	68.20	-2.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

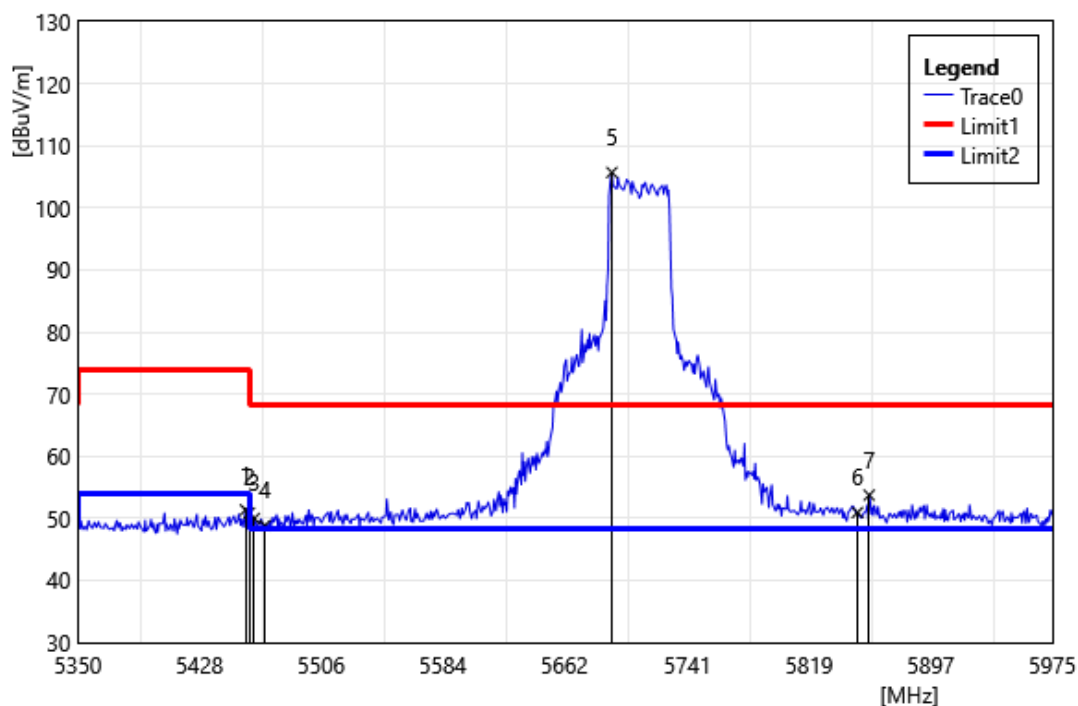


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.50	51.94	-0.58	51.36	74.00	-22.64	PEAK
2	5460.00	51.45	-0.57	50.88	74.00	-23.12	PEAK
3	5463.13	50.56	-0.57	49.99	68.20	-18.21	PEAK
4	5470.00	49.41	-0.56	48.85	68.20	-19.35	PEAK
5	5692.50	106.31	-0.61	105.70	68.20	37.50	PEAK
6	5850.00	50.66	0.28	50.94	68.20	-17.26	PEAK
7	5857.50	53.44	0.30	53.74	68.20	-14.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

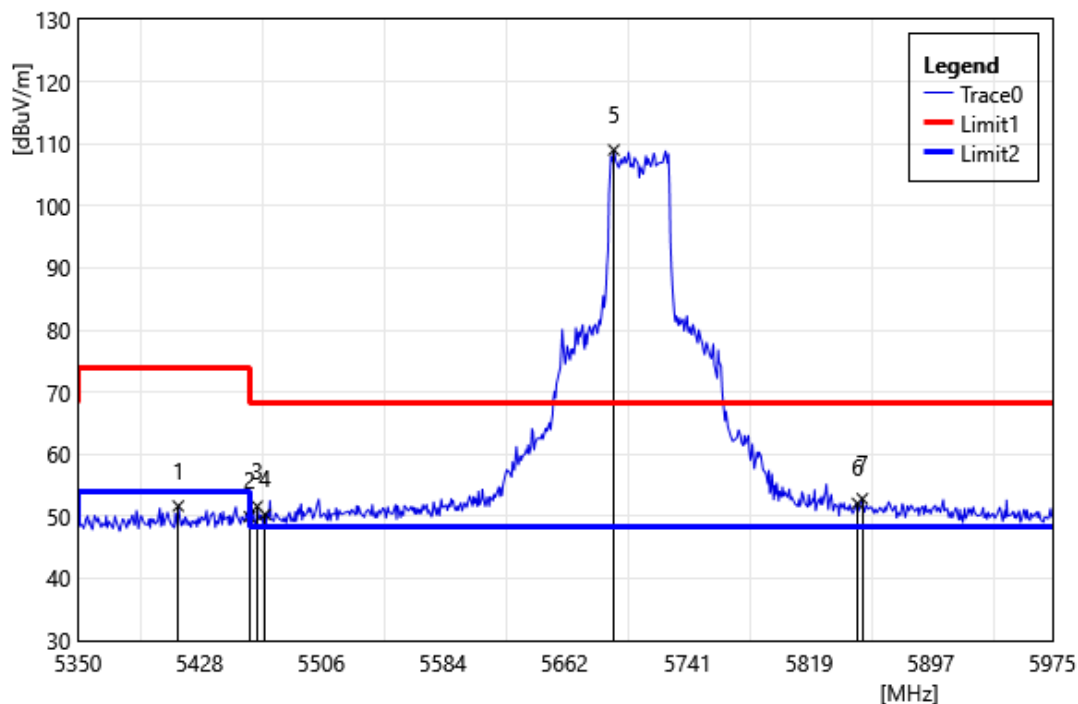


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5414.38	52.50	-0.84	51.66	74.00	-22.34	PEAK
2	5460.00	50.50	-0.57	49.93	74.00	-24.07	PEAK
3	5465.00	52.17	-0.57	51.60	68.20	-16.60	PEAK
4	5470.00	50.84	-0.56	50.28	68.20	-17.92	PEAK
5	5693.75	109.62	-0.61	109.01	68.20	40.81	PEAK
6	5850.00	51.80	0.28	52.08	68.20	-16.12	PEAK
7	5853.13	52.54	0.29	52.83	68.20	-15.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

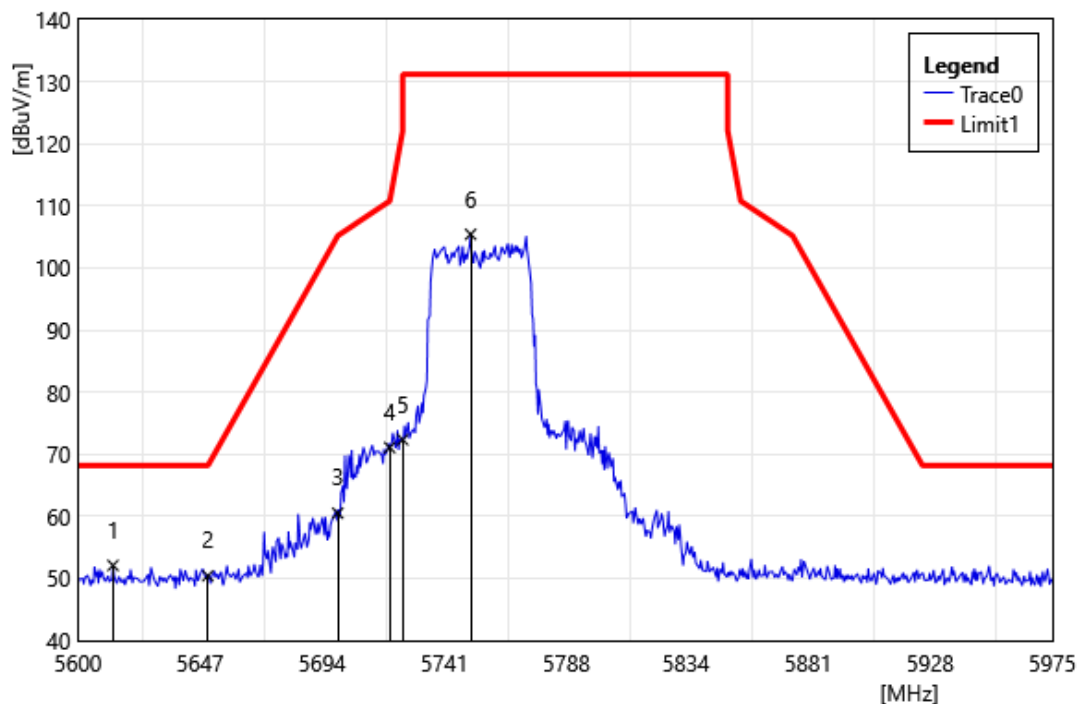


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5613.50	52.69	-0.59	52.10	68.20	-16.10	PEAK
2	5650.00	51.04	-0.64	50.40	68.20	-17.80	PEAK
3	5700.00	61.12	-0.61	60.51	105.20	-44.69	PEAK
4	5720.00	71.48	-0.40	71.08	110.80	-39.72	PEAK
5	5725.00	72.68	-0.34	72.34	122.20	-49.86	PEAK
6	5751.13	105.49	-0.07	105.42	131.20	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

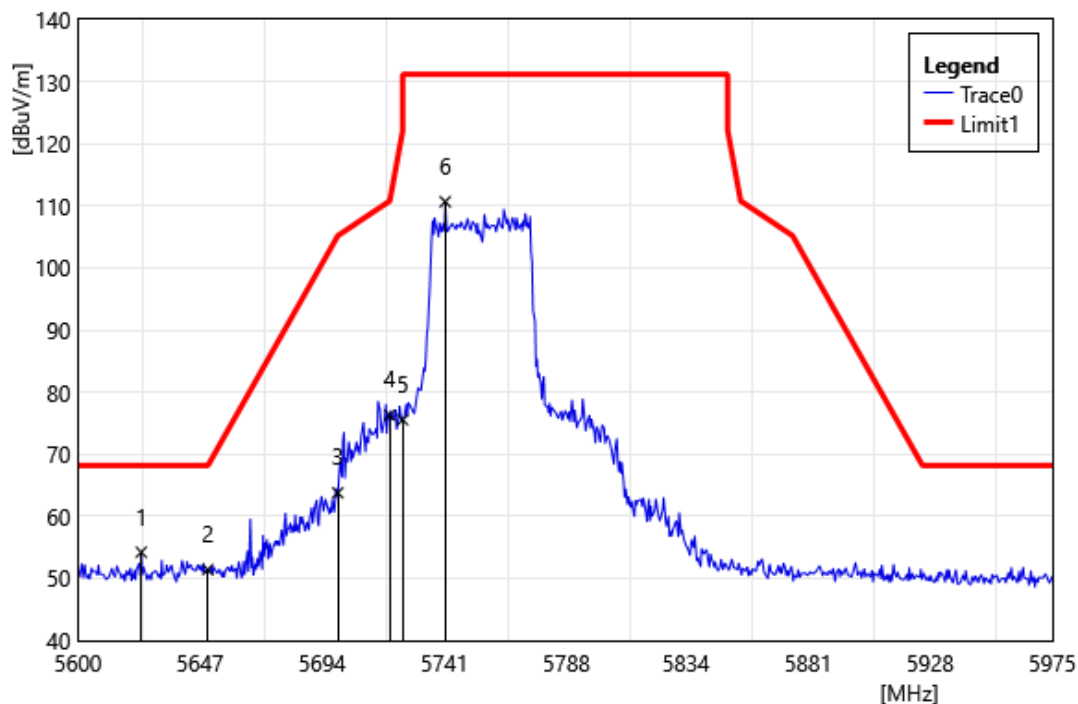


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5624.38	54.82	-0.60	54.22	68.20	-13.98	PEAK
2	5650.00	52.06	-0.64	51.42	68.20	-16.78	PEAK
3	5700.00	64.40	-0.61	63.79	105.20	-41.41	PEAK
4	5720.00	76.69	-0.40	76.29	110.80	-34.51	PEAK
5	5725.00	75.89	-0.34	75.55	122.20	-46.65	PEAK
6	5741.38	110.84	-0.17	110.67	131.20	-20.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

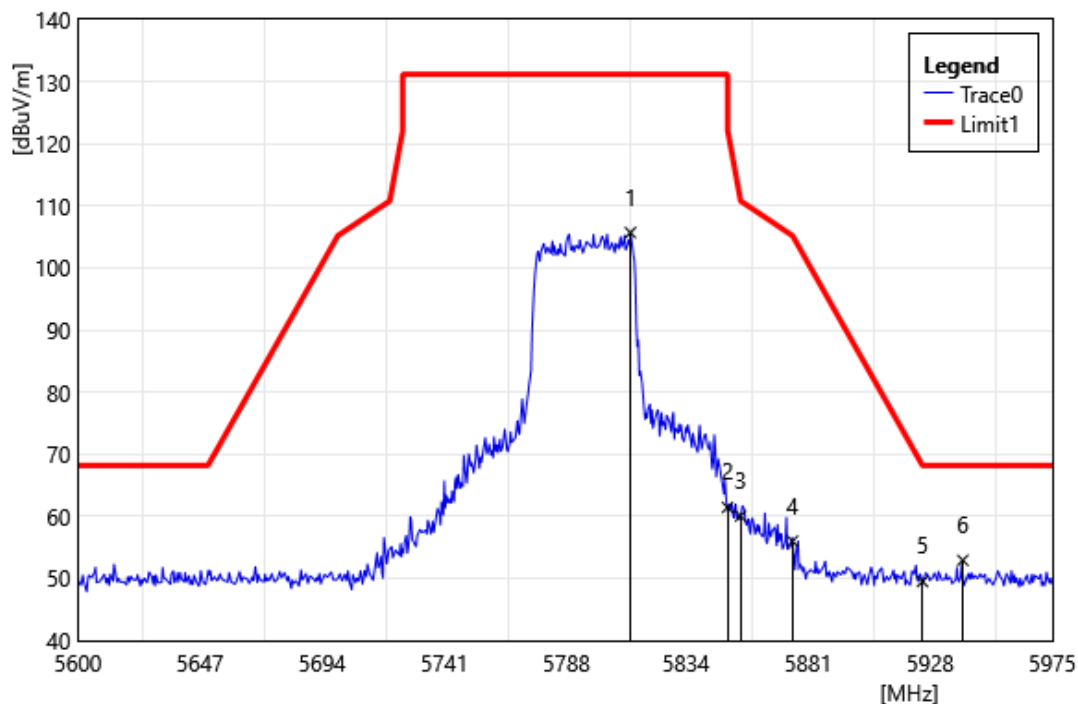


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5812.63	105.51	0.18	105.69	131.20	-25.51	PEAK
2	5850.00	61.16	0.28	61.44	122.20	-60.76	PEAK
3	5855.00	59.78	0.29	60.07	110.80	-50.73	PEAK
4	5875.00	55.67	0.34	56.01	105.20	-49.19	PEAK
5	5925.00	49.23	0.28	49.51	68.20	-18.69	PEAK
6	5940.50	52.74	0.19	52.93	68.20	-15.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

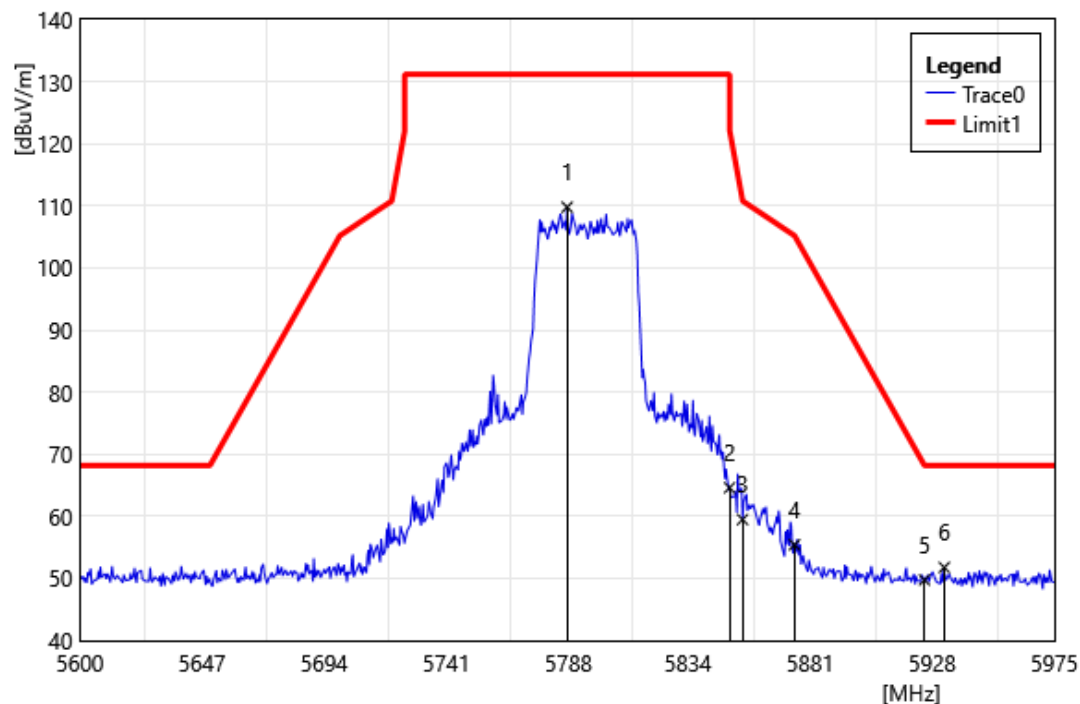


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5787.50	109.70	0.09	109.79	131.20	-21.41	PEAK
2	5850.00	64.33	0.28	64.61	122.20	-57.59	PEAK
3	5855.00	59.19	0.29	59.48	110.80	-51.32	PEAK
4	5875.00	55.08	0.34	55.42	105.20	-49.78	PEAK
5	5925.00	49.48	0.28	49.76	68.20	-18.44	PEAK
6	5932.63	51.54	0.23	51.77	68.20	-16.43	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

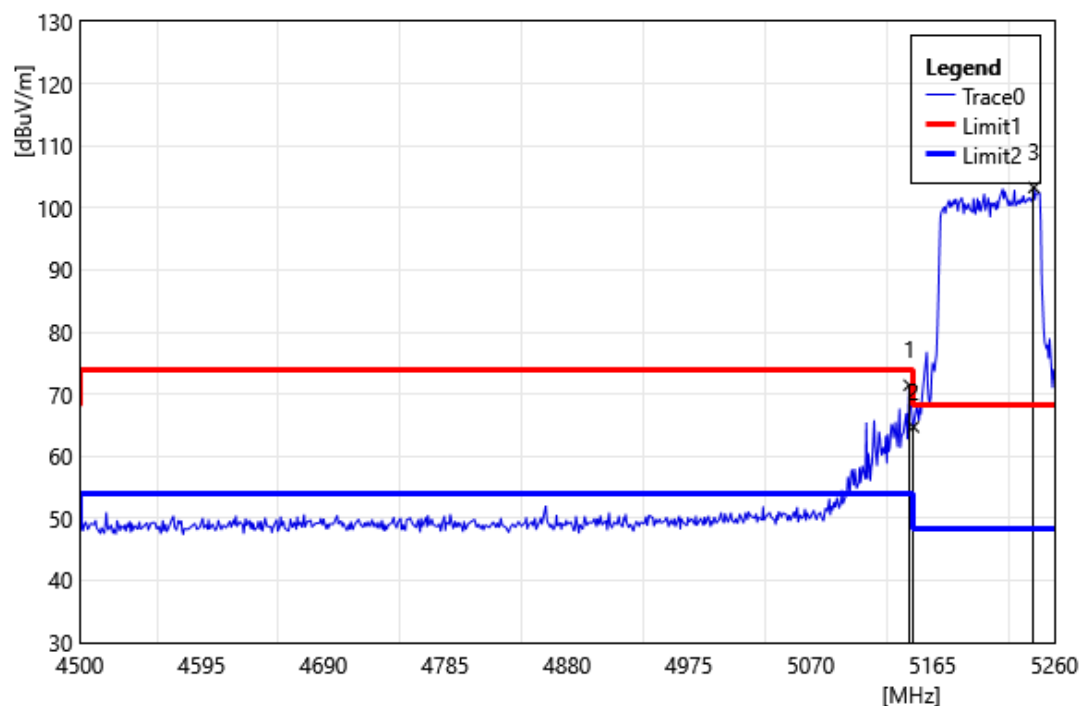


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	72.33	-0.88	71.45	74.00	-2.55	PEAK
2	5150.00	65.61	-0.89	64.72	74.00	-9.28	PEAK
3	5244.04	104.73	-1.44	103.29	68.20	35.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

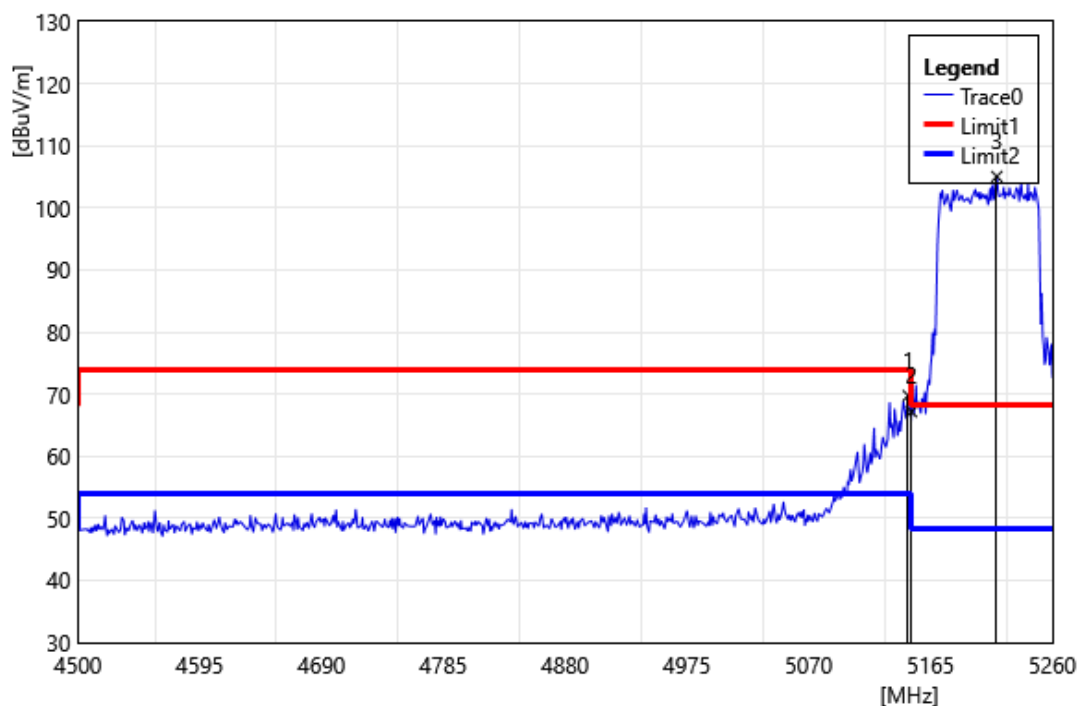


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	70.65	-0.89	69.76	74.00	-4.24	PEAK
2	5150.00	68.07	-0.89	67.18	74.00	-6.82	PEAK
3	5216.68	106.30	-1.25	105.06	68.20	36.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

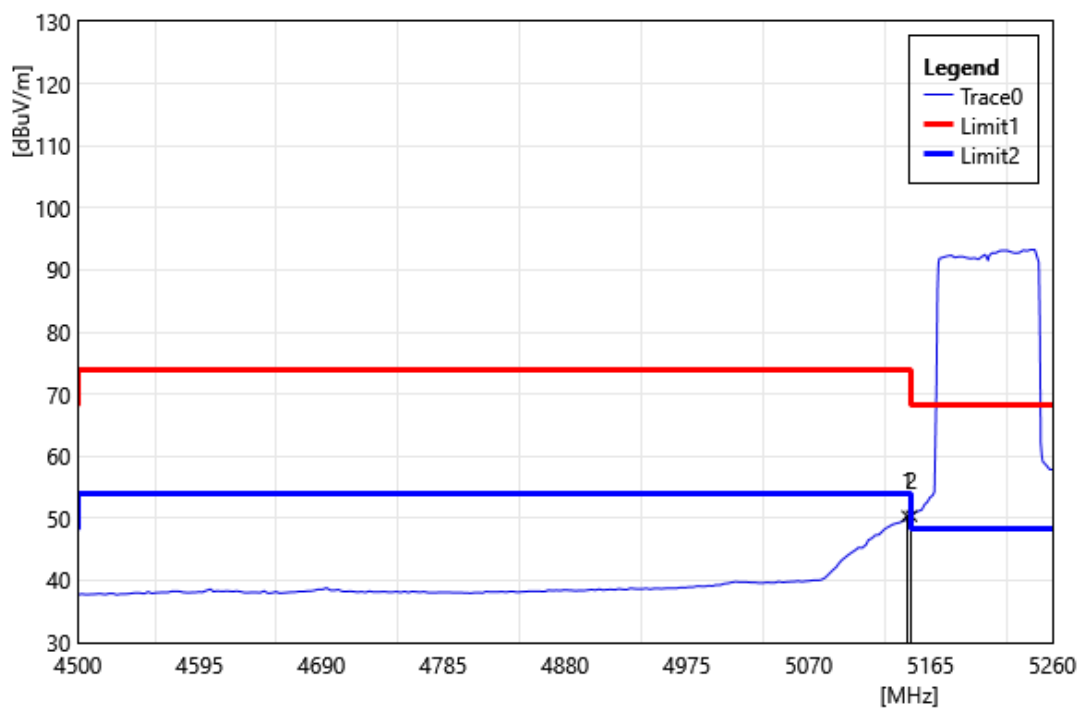


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	51.24	-0.88	50.36	54.00	-3.65	AVG
2	5150.00	51.26	-0.89	50.37	54.00	-3.63	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

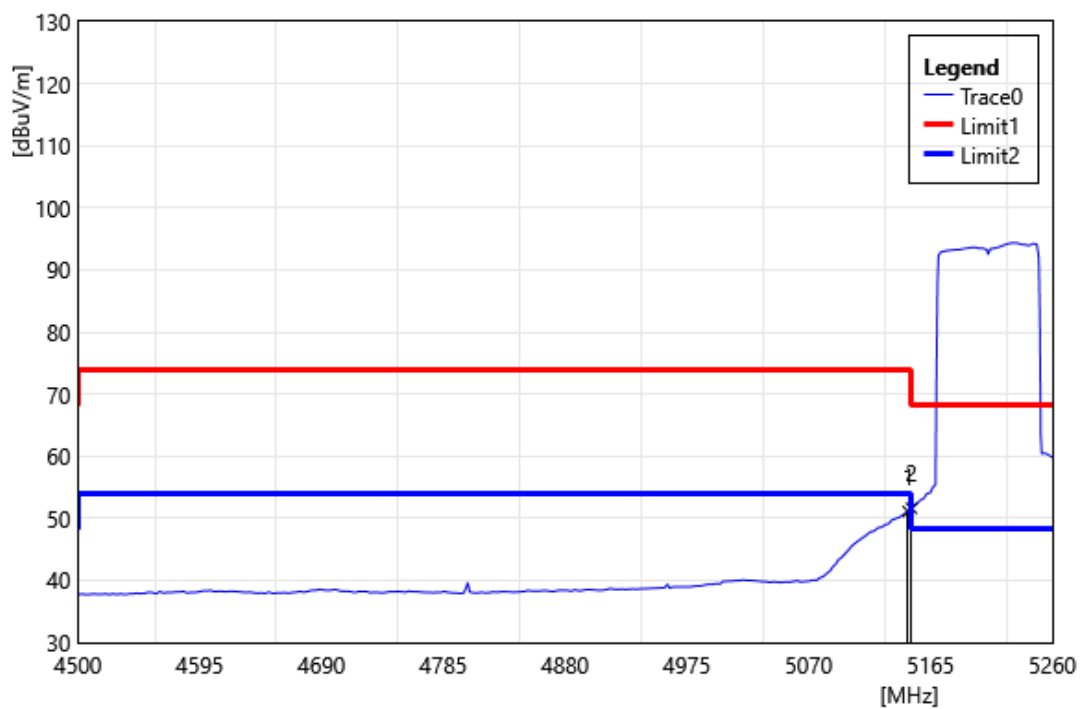


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	51.99	-0.89	51.10	54.00	-2.90	AVG
2	5150.00	52.53	-0.89	51.64	54.00	-2.36	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

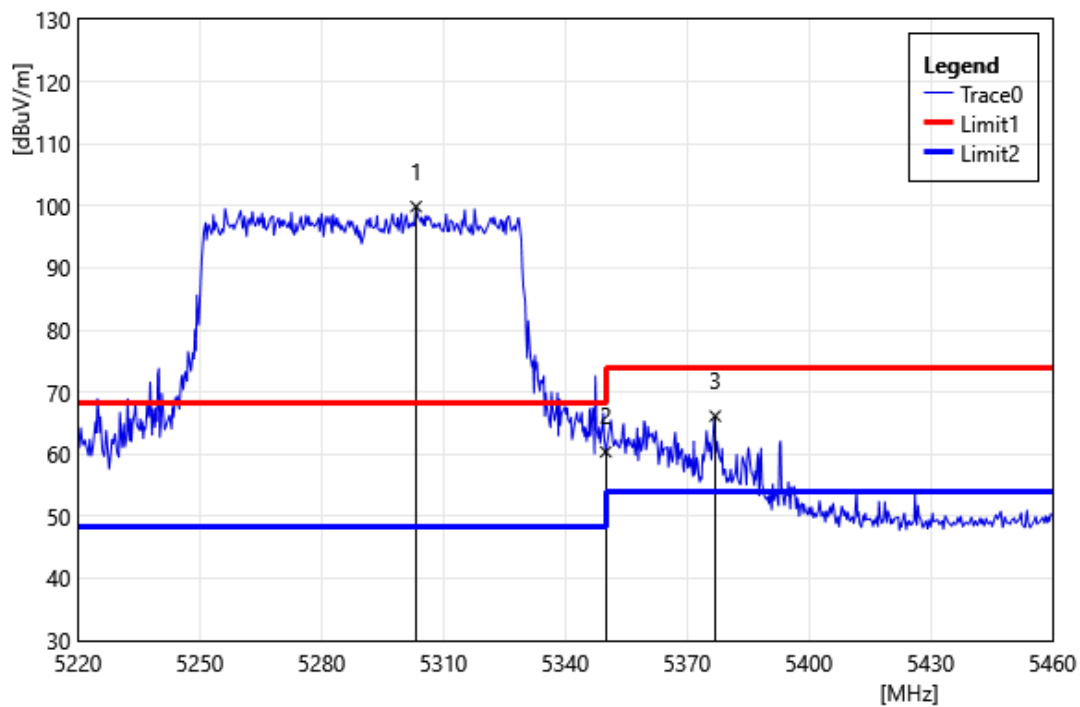


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5303.28	101.49	-1.60	99.89	68.20	31.69	PEAK
2	5350.00	61.65	-1.27	60.38	74.00	-13.62	PEAK
3	5376.96	67.24	-1.08	66.16	74.00	-7.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

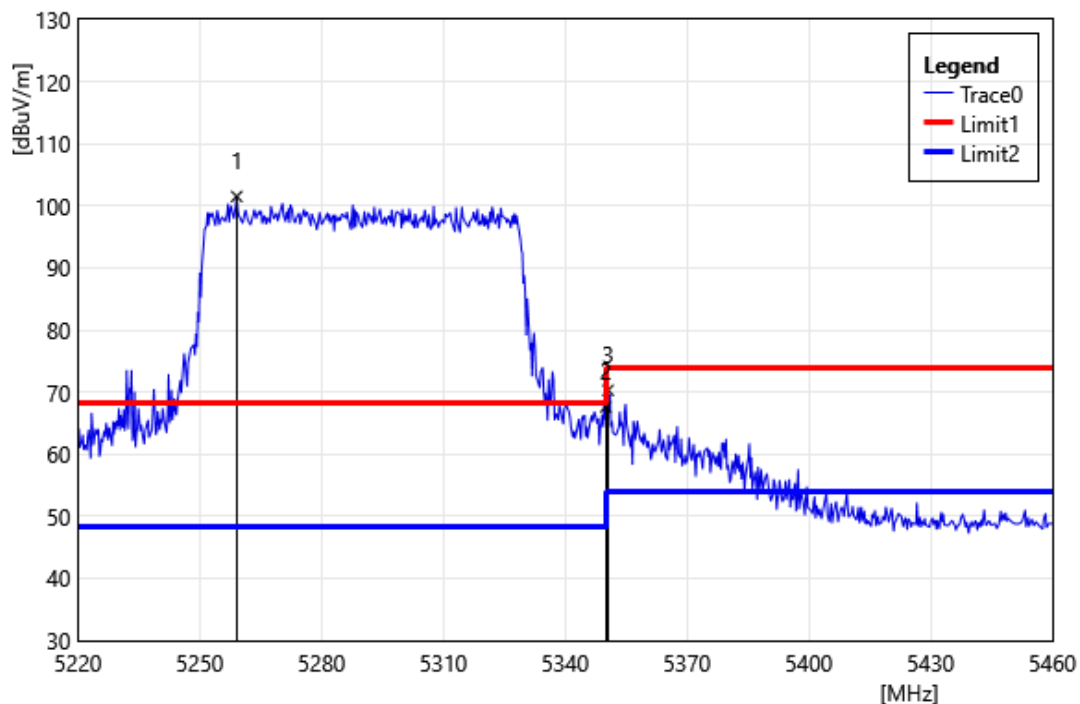


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5259.12	103.02	-1.51	101.51	68.20	33.31	PEAK
2	5350.00	68.93	-1.27	67.65	74.00	-6.35	PEAK
3	5350.56	71.58	-1.27	70.31	74.00	-3.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290 MHz		
Polarization:	Vertical		
Remark:			

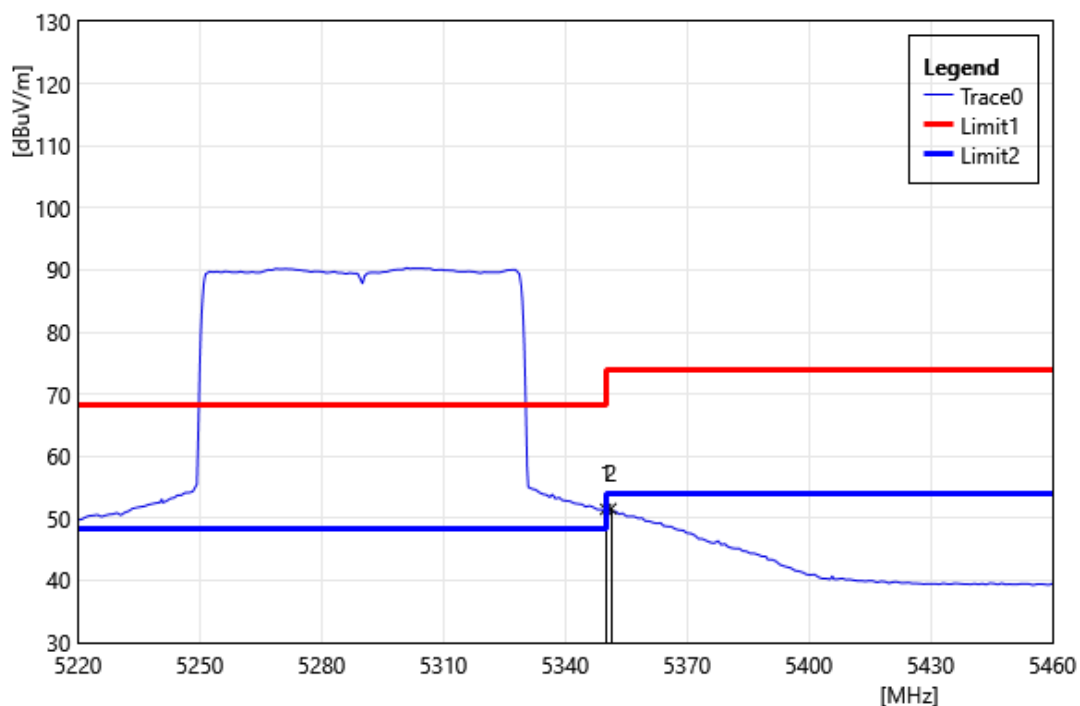


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	52.72	-1.27	51.45	54.00	-2.55	AVG
2	5351.28	52.81	-1.26	51.55	54.00	-2.45	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290 MHz		
Polarization:	Horizontal		
Remark:			

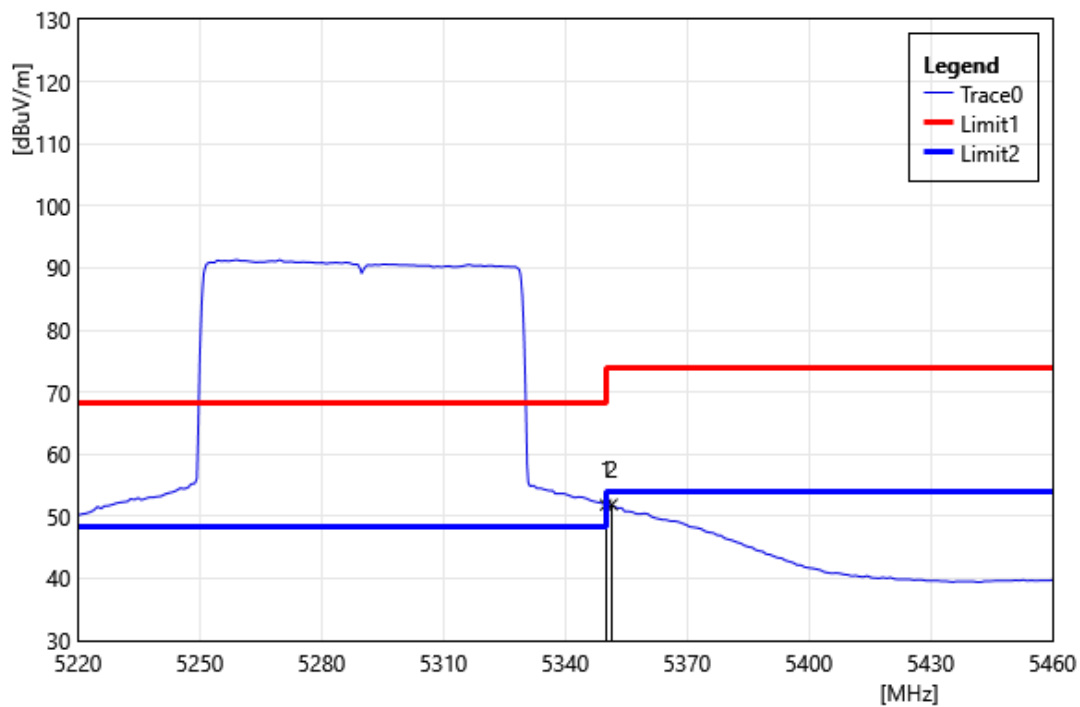


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.12	-1.27	51.85	54.00	-2.15	AVG
2	5351.52	53.15	-1.26	51.89	54.00	-2.11	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

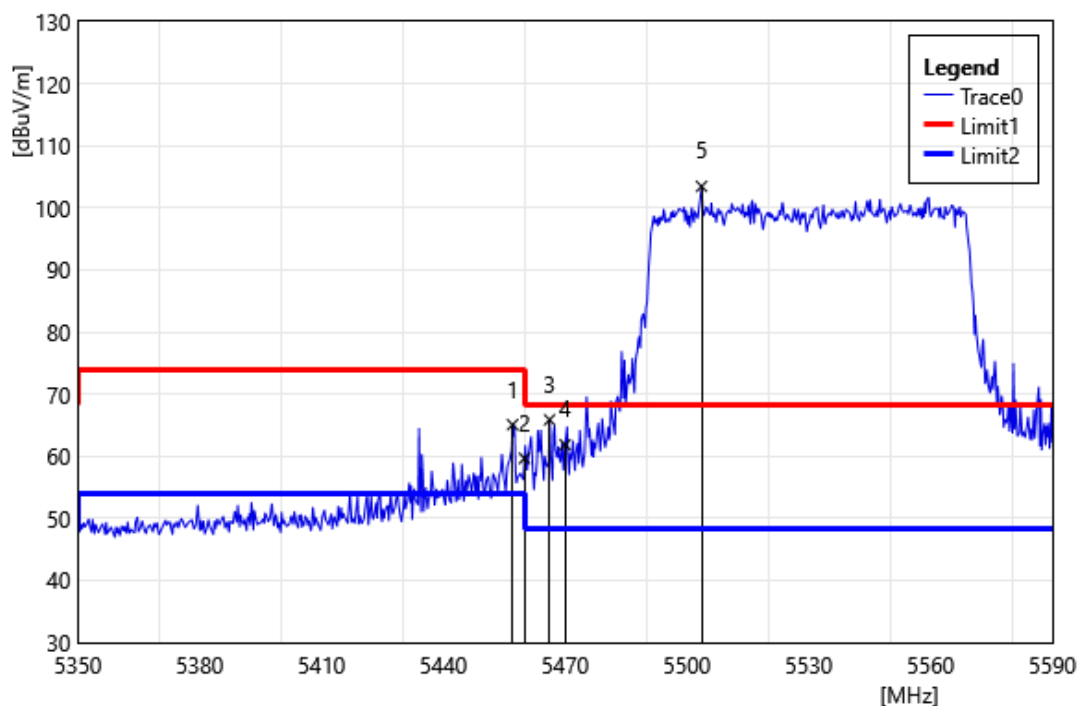


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.04	65.64	-0.56	65.08	74.00	-8.92	PEAK
2	5460.00	60.22	-0.55	59.67	74.00	-14.33	PEAK
3	5466.16	66.42	-0.55	65.87	68.20	-2.33	PEAK
4	5470.00	62.40	-0.54	61.86	68.20	-6.34	PEAK
5	5503.60	103.98	-0.51	103.47	68.20	35.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

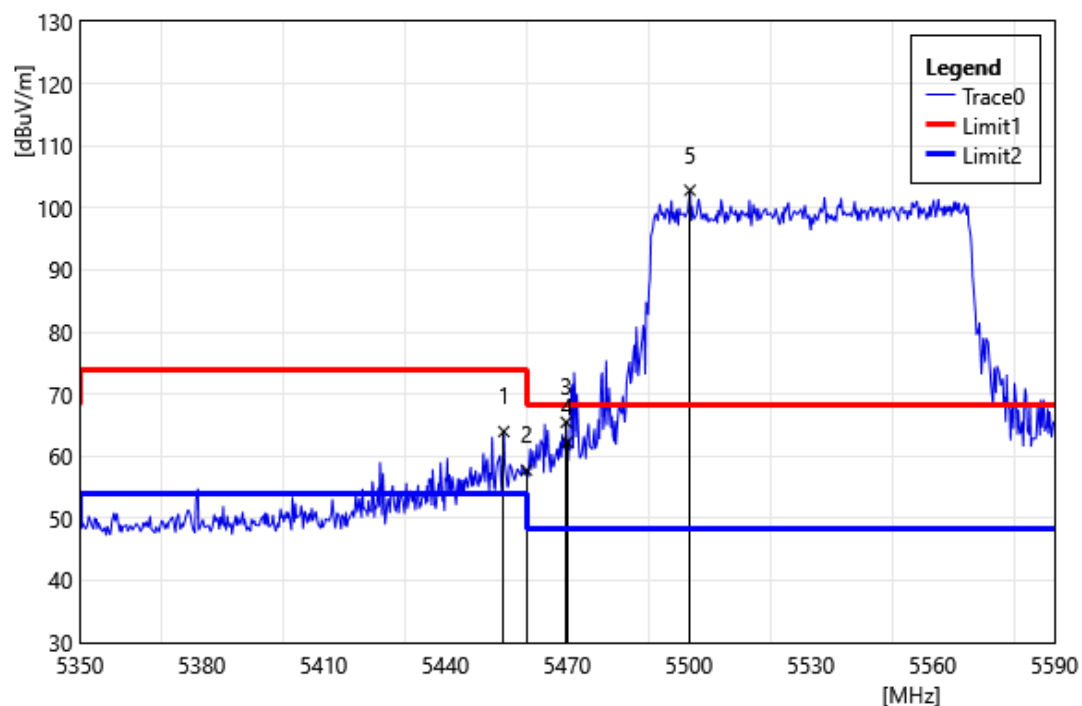


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.40	64.54	-0.56	63.98	74.00	-10.02	PEAK
2	5460.00	58.30	-0.55	57.75	74.00	-16.25	PEAK
3	5469.76	66.01	-0.54	65.47	68.20	-2.73	PEAK
4	5470.00	62.79	-0.54	62.25	68.20	-5.95	PEAK
5	5500.24	103.34	-0.51	102.83	68.20	34.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

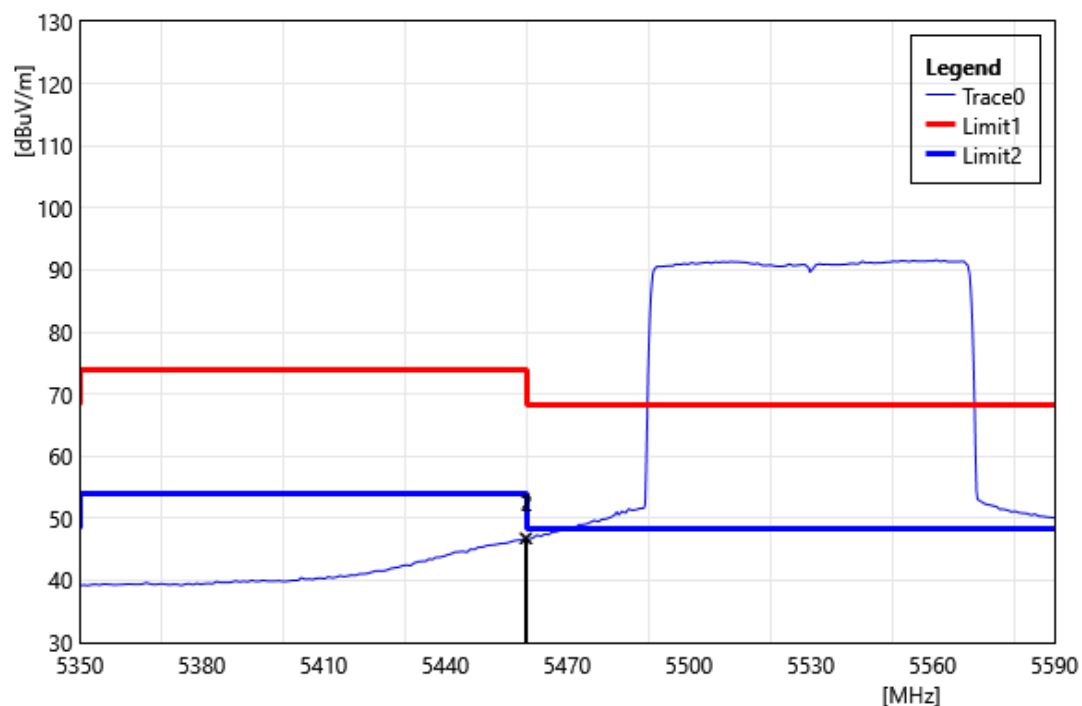


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.68	47.32	-0.55	46.77	54.00	-7.23	AVG
2	5460.00	47.33	-0.55	46.78	54.00	-7.22	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

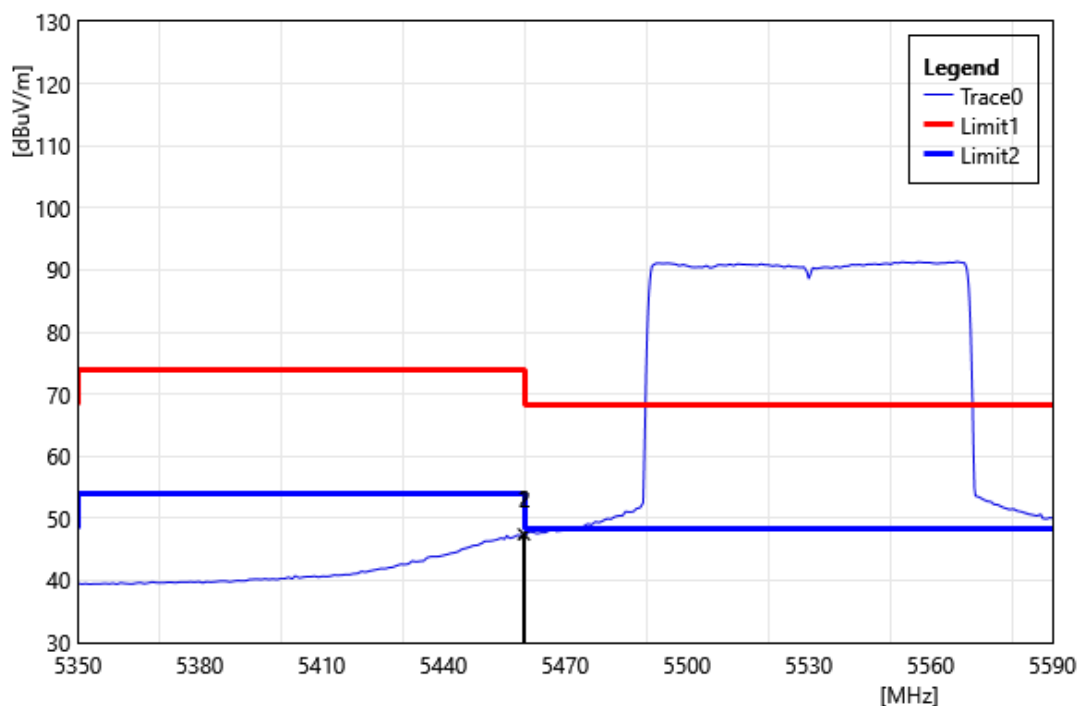


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.68	48.00	-0.55	47.45	54.00	-6.55	AVG
2	5460.00	47.92	-0.55	47.37	54.00	-6.63	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

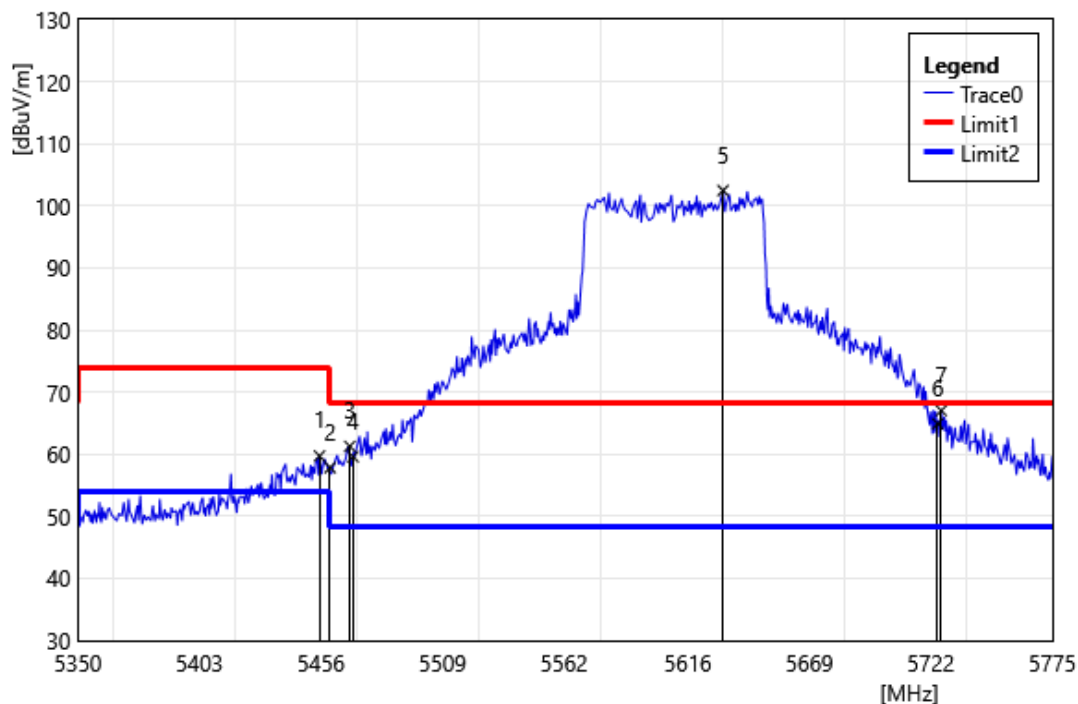


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.40	60.31	-0.58	59.73	74.00	-14.27	PEAK
2	5460.00	58.41	-0.57	57.84	74.00	-16.16	PEAK
3	5468.58	61.84	-0.56	61.28	68.20	-6.93	PEAK
4	5470.00	60.17	-0.56	59.61	68.20	-8.59	PEAK
5	5631.35	103.08	-0.61	102.47	68.20	34.27	PEAK
6	5725.00	65.26	-0.34	64.92	68.20	-3.28	PEAK
7	5726.55	67.37	-0.33	67.04	68.20	-1.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

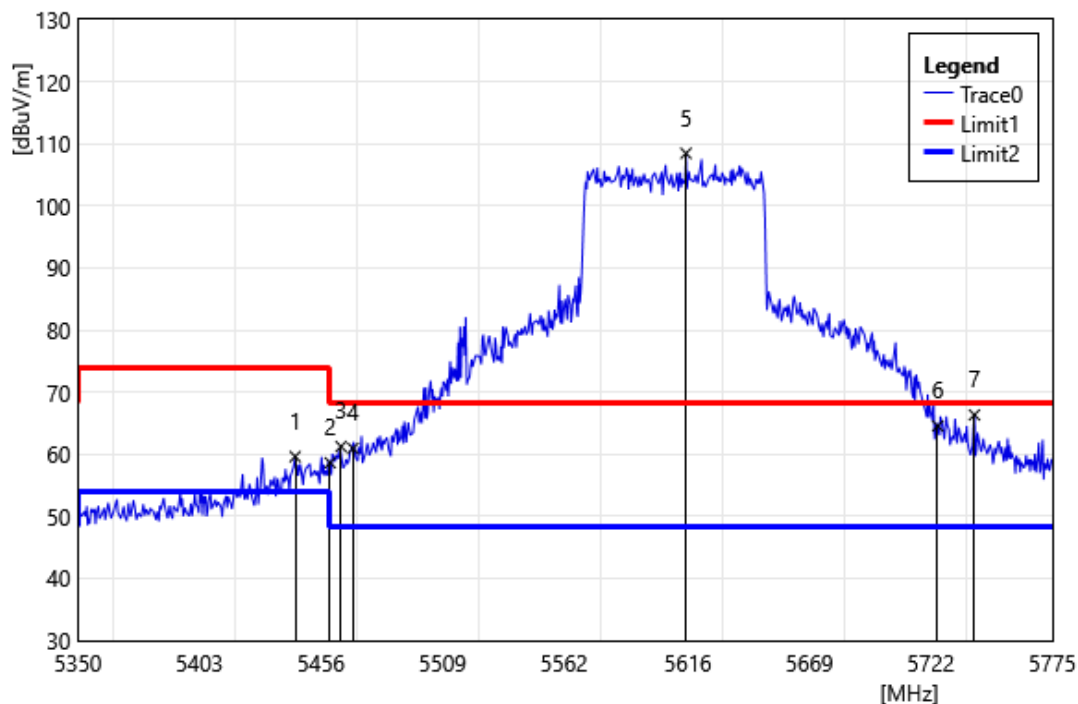


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5444.78	60.24	-0.62	59.62	74.00	-14.38	PEAK
2	5460.00	59.21	-0.57	58.64	74.00	-15.36	PEAK
3	5464.75	61.82	-0.57	61.25	68.20	-6.95	PEAK
4	5470.00	61.51	-0.56	60.95	68.20	-7.25	PEAK
5	5615.20	109.06	-0.59	108.47	68.20	40.27	PEAK
6	5725.00	64.91	-0.34	64.57	68.20	-3.63	PEAK
7	5741.00	66.51	-0.18	66.33	68.20	-1.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

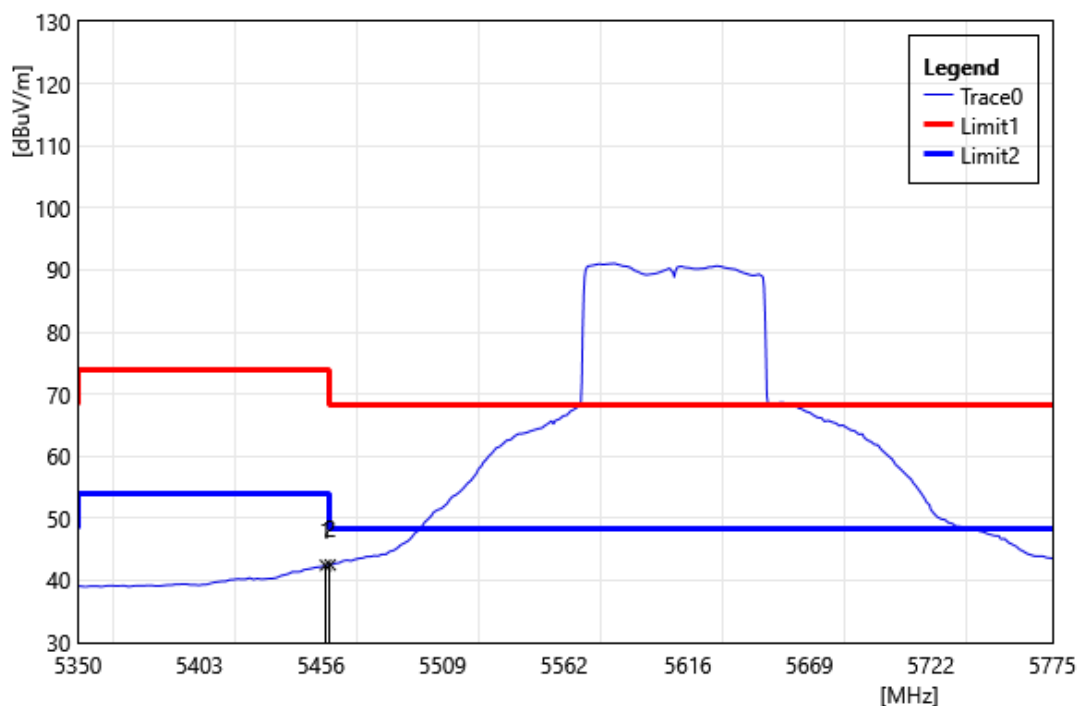


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.95	43.02	-0.58	42.44	54.00	-11.56	AVG
2	5460.00	43.06	-0.57	42.49	54.00	-11.51	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

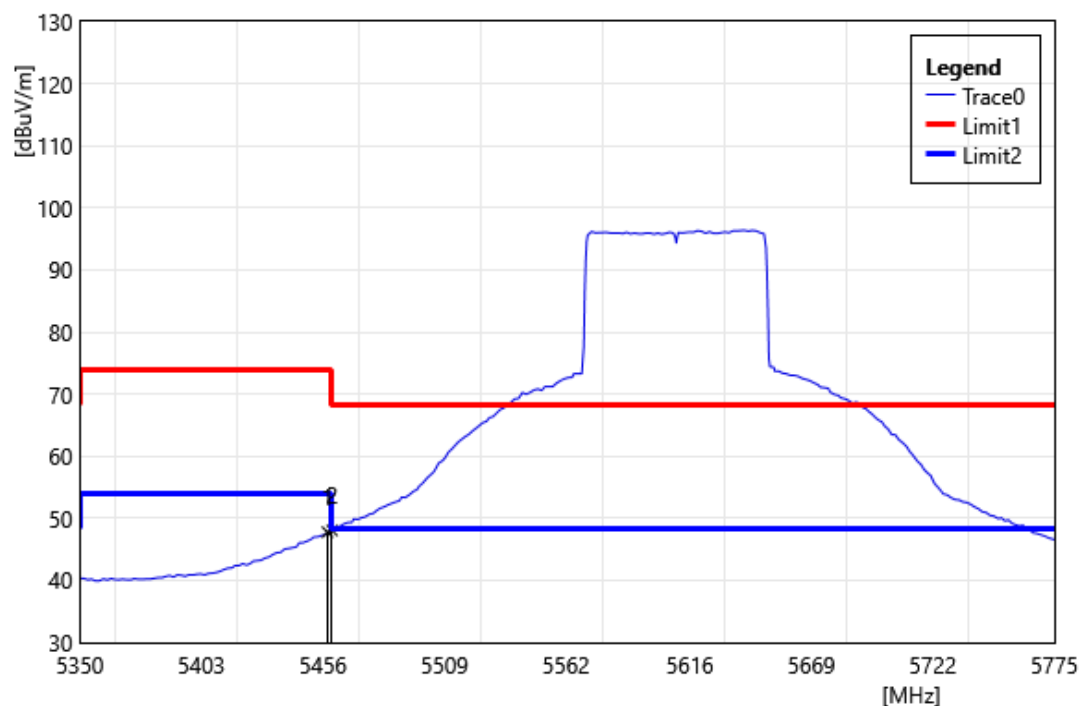


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.95	48.36	-0.58	47.78	54.00	-6.22	AVG
2	5460.00	48.63	-0.57	48.06	54.00	-5.94	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

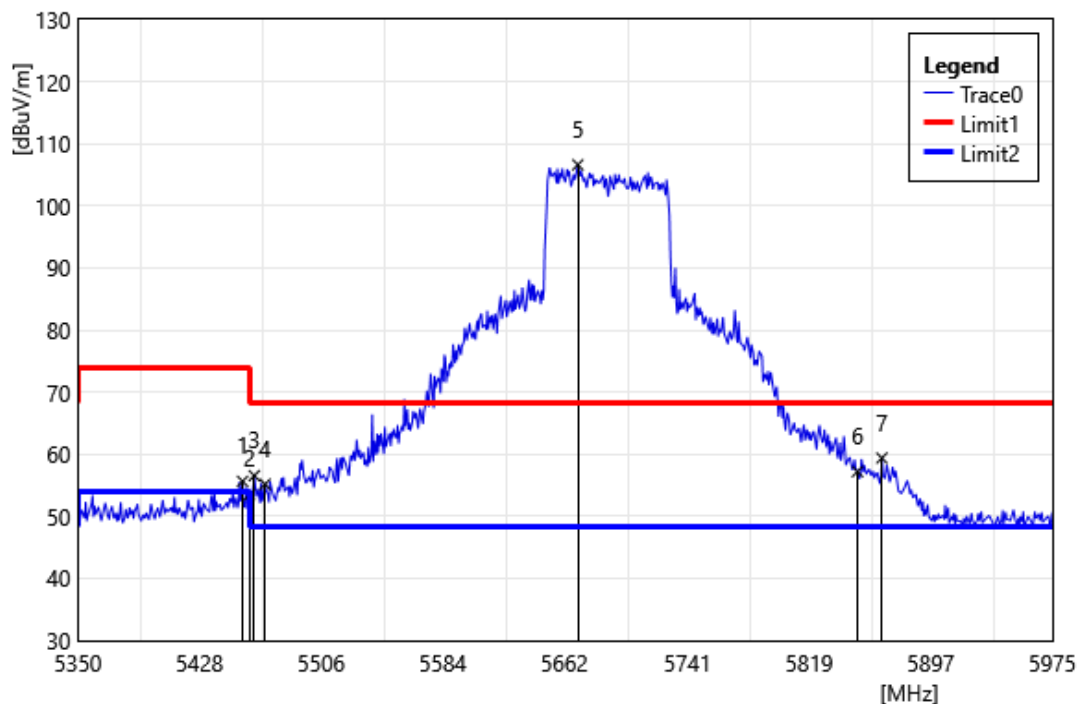


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.63	56.22	-0.58	55.64	74.00	-18.36	PEAK
2	5460.00	54.06	-0.57	53.49	74.00	-20.51	PEAK
3	5463.13	57.12	-0.57	56.55	68.20	-11.65	PEAK
4	5470.00	55.74	-0.56	55.18	68.20	-13.02	PEAK
5	5670.63	107.24	-0.63	106.62	68.20	38.42	PEAK
6	5850.00	56.92	0.28	57.20	68.20	-11.00	PEAK
7	5865.63	59.07	0.32	59.39	68.20	-8.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

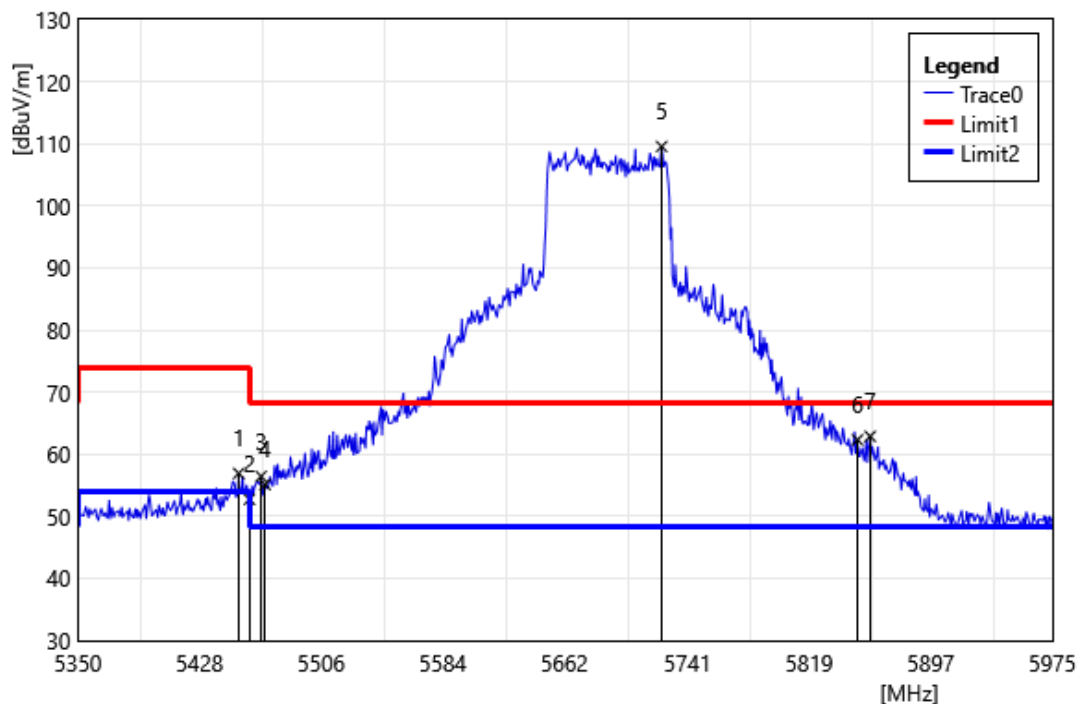


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.13	57.50	-0.58	56.93	74.00	-17.08	PEAK
2	5460.00	53.31	-0.57	52.74	74.00	-21.26	PEAK
3	5467.50	57.01	-0.57	56.44	68.20	-11.76	PEAK
4	5470.00	55.69	-0.56	55.13	68.20	-13.07	PEAK
5	5724.38	109.92	-0.35	109.57	68.20	41.37	PEAK
6	5850.00	62.04	0.28	62.32	68.20	-5.88	PEAK
7	5858.13	62.58	0.30	62.88	68.20	-5.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

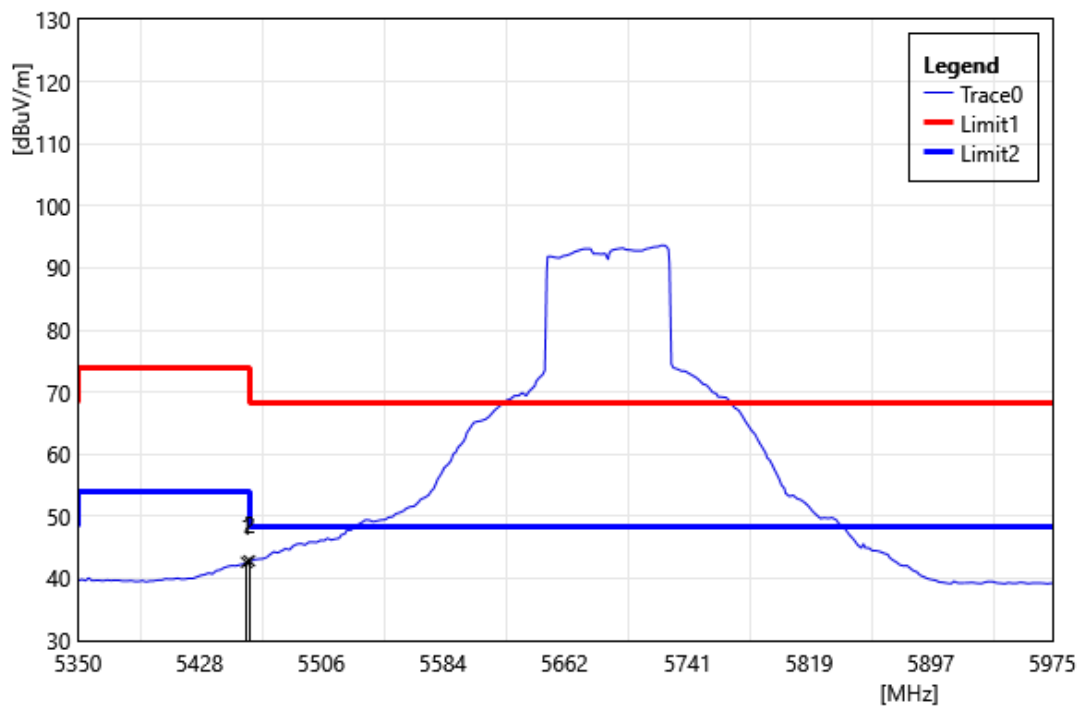


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.13	43.19	-0.58	42.61	54.00	-11.39	AVG
2	5460.00	43.39	-0.57	42.82	54.00	-11.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

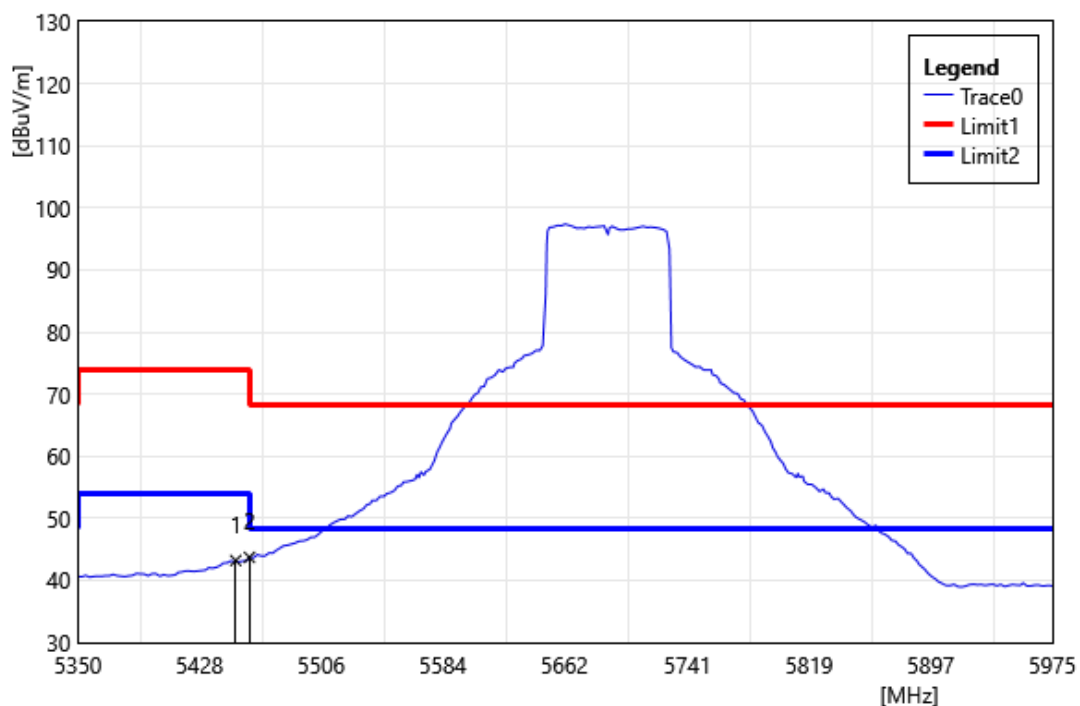


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.25	43.80	-0.58	43.22	54.00	-10.79	AVG
2	5460.00	44.28	-0.57	43.71	54.00	-10.29	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

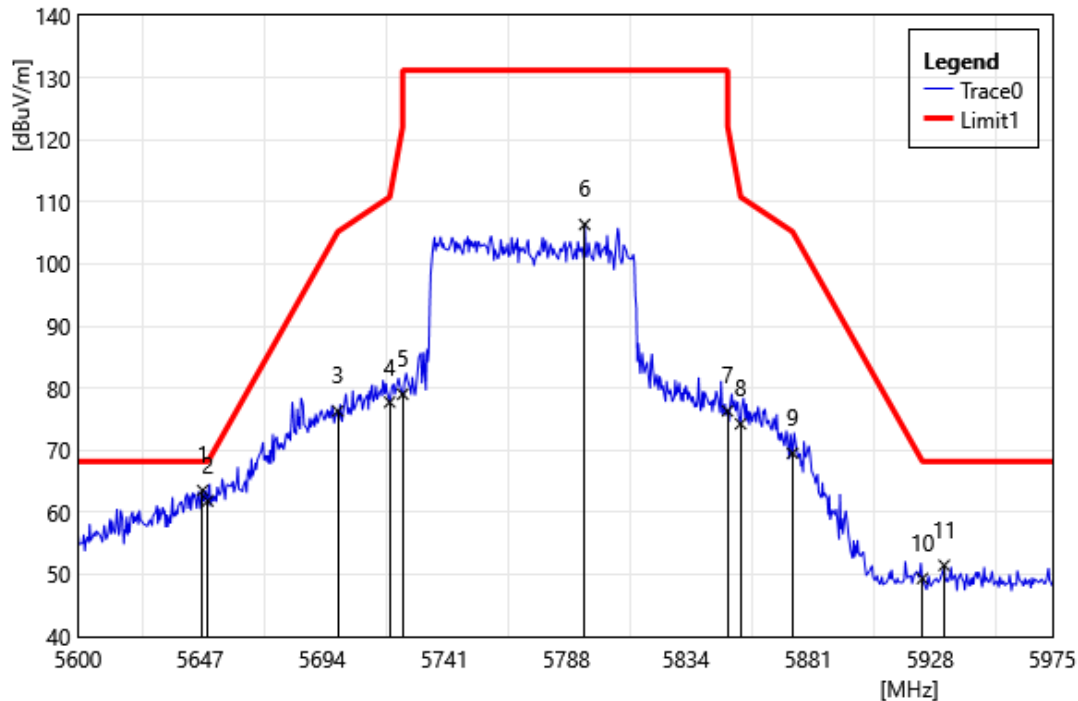


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5648.00	64.16	-0.64	63.52	68.20	-4.68	PEAK
2	5650.00	62.48	-0.64	61.84	68.20	-6.36	PEAK
3	5700.00	76.90	-0.61	76.29	105.20	-28.91	PEAK
4	5720.00	78.14	-0.40	77.74	110.80	-33.06	PEAK
5	5725.00	79.36	-0.34	79.02	131.20	-52.18	PEAK
6	5795.00	106.22	0.13	106.35	131.20	-24.85	PEAK
7	5850.00	76.04	0.28	76.32	122.20	-45.88	PEAK
8	5855.00	73.95	0.29	74.24	110.80	-36.56	PEAK
9	5875.00	69.18	0.34	69.52	105.20	-35.68	PEAK
10	5925.00	49.07	0.28	49.35	68.20	-18.85	PEAK
11	5933.38	51.24	0.23	51.47	68.20	-16.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

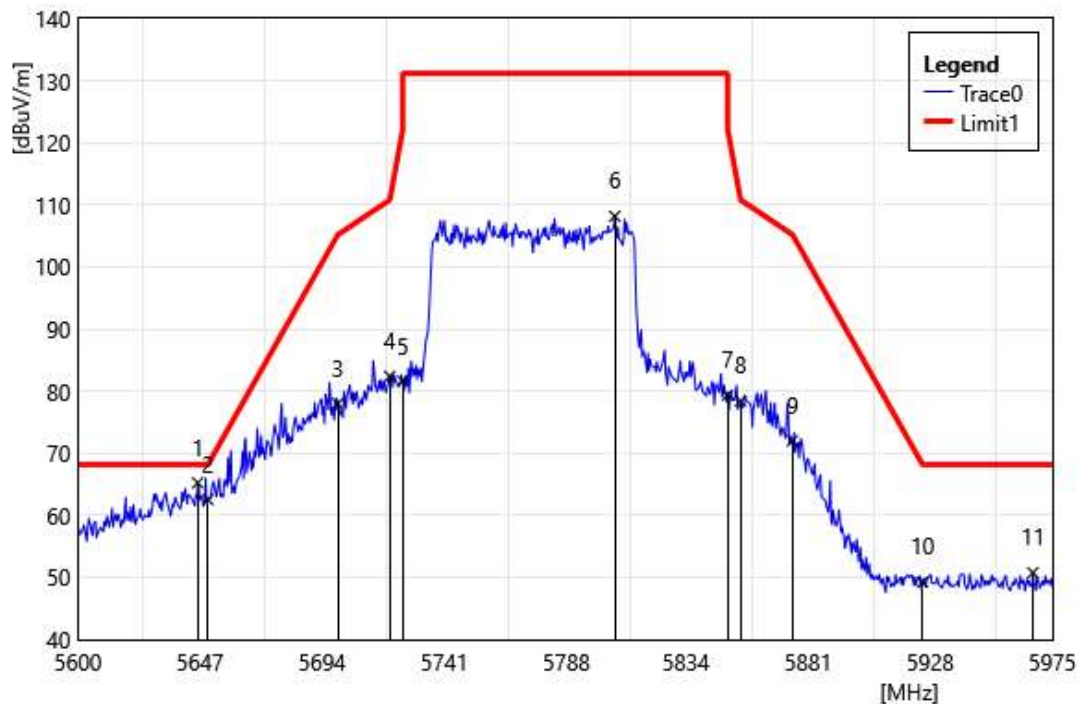


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5646.13	65.86	-0.63	65.23	68.20	-2.97	PEAK
2	5650.00	63.18	-0.64	62.54	68.20	-5.66	PEAK
3	5700.00	78.59	-0.61	77.98	105.20	-27.22	PEAK
4	5720.00	82.79	-0.40	82.39	110.80	-28.41	PEAK
5	5725.00	81.97	-0.34	81.63	131.20	-49.57	PEAK
6	5806.63	107.99	0.17	108.16	131.20	-23.04	PEAK
7	5850.00	79.07	0.28	79.35	122.20	-42.85	PEAK
8	5855.00	78.13	0.29	78.42	110.80	-32.38	PEAK
9	5875.00	71.68	0.34	72.02	105.20	-33.18	PEAK
10	5925.00	48.96	0.28	49.24	68.20	-18.96	PEAK
11	5967.50	50.58	0.19	50.77	68.20	-17.43	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

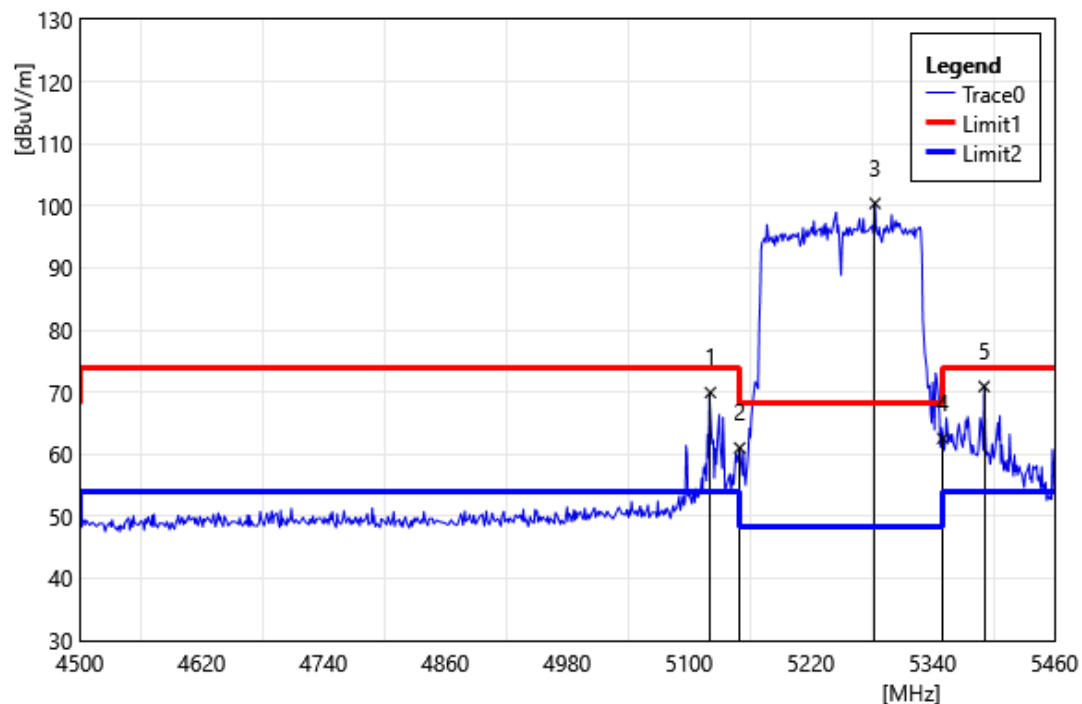


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5121.12	70.80	-0.86	69.94	74.00	-4.06	PEAK
2	5150.00	61.91	-0.89	61.02	74.00	-12.98	PEAK
3	5283.36	101.97	-1.58	100.39	68.20	32.19	PEAK
4	5350.00	63.82	-1.27	62.55	74.00	-11.45	PEAK
5	5390.88	71.90	-0.98	70.92	74.00	-3.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

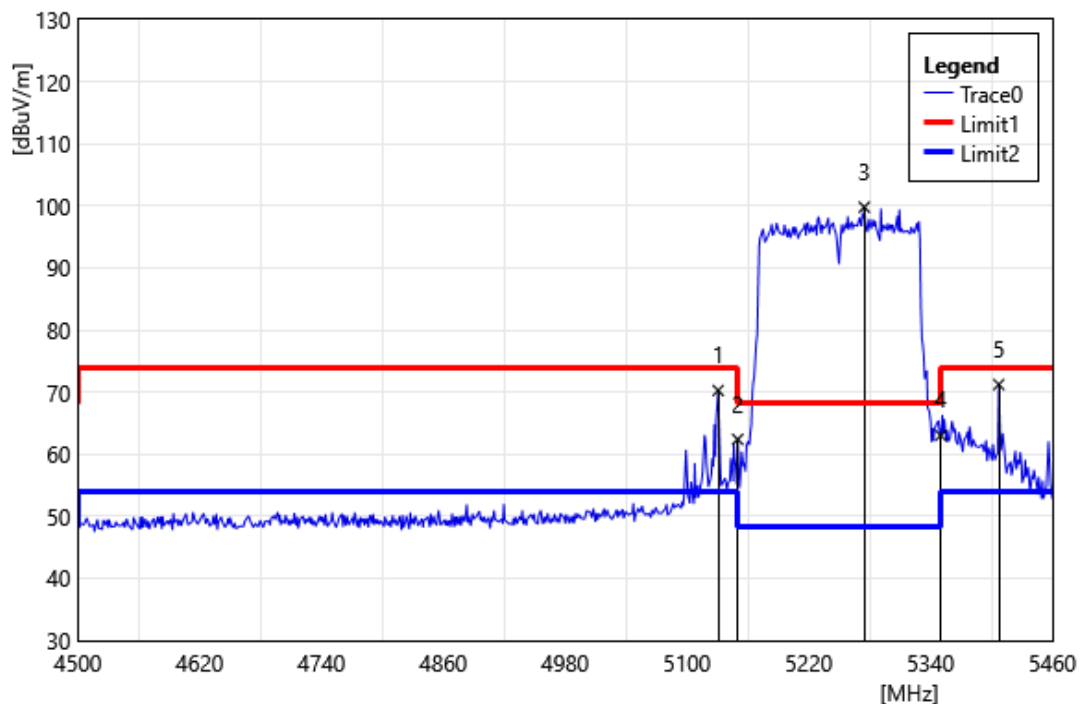


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5130.72	71.15	-0.87	70.28	74.00	-3.72	PEAK
2	5150.00	63.29	-0.89	62.40	74.00	-11.60	PEAK
3	5274.72	101.34	-1.55	99.79	68.20	31.59	PEAK
4	5350.00	64.29	-1.27	63.02	74.00	-10.98	PEAK
5	5407.20	72.10	-0.87	71.23	74.00	-2.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

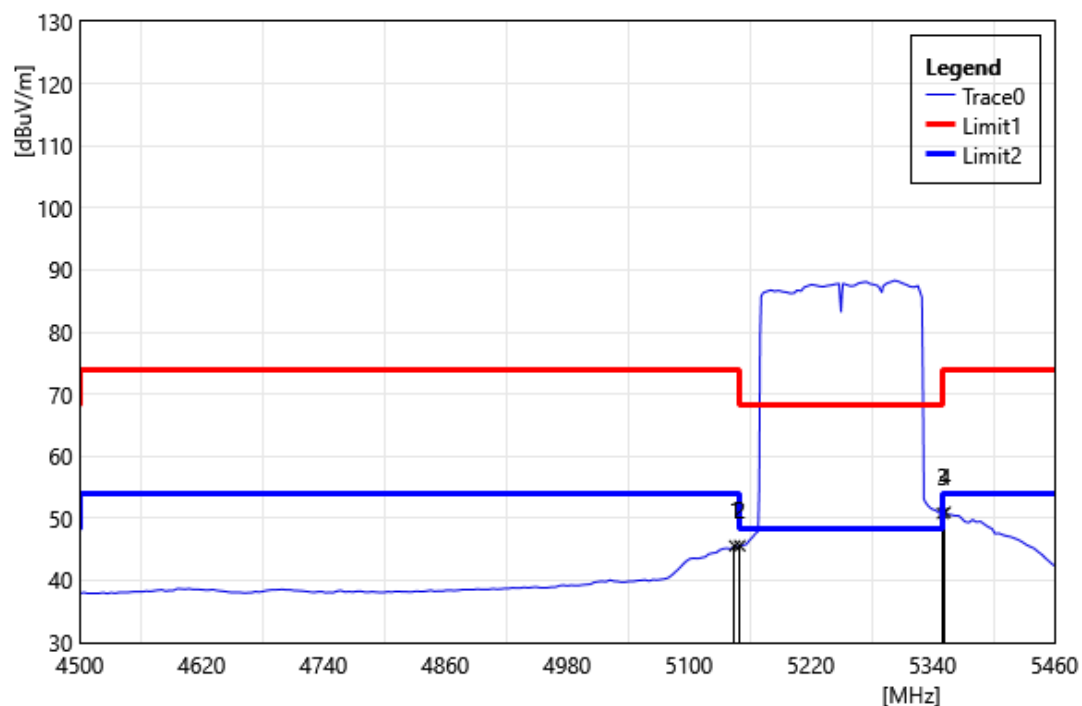


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.12	46.44	-0.88	45.56	54.00	-8.44	AVG
2	5150.00	46.47	-0.89	45.59	54.00	-8.41	AVG
3	5350.00	52.08	-1.27	50.81	54.00	-3.19	AVG
4	5352.48	52.24	-1.25	50.99	54.00	-3.01	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

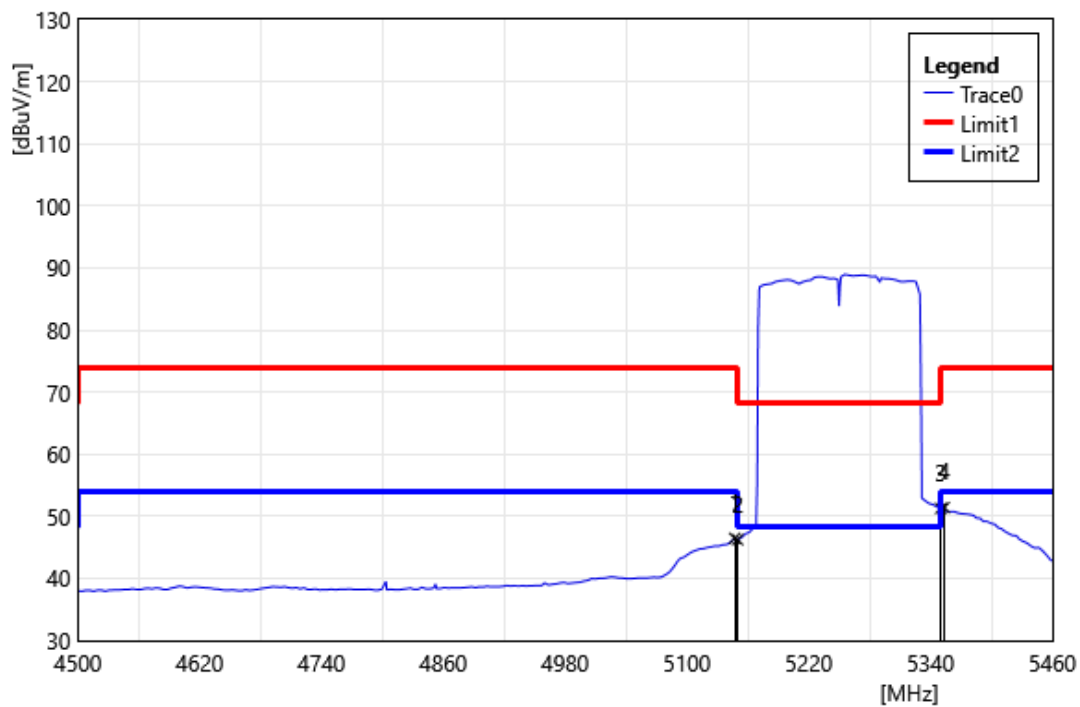


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.04	47.36	-0.89	46.47	54.00	-7.53	AVG
2	5150.00	47.14	-0.89	46.25	54.00	-7.75	AVG
3	5350.00	52.56	-1.27	51.28	54.00	-2.72	AVG
4	5353.44	52.66	-1.25	51.41	54.00	-2.59	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

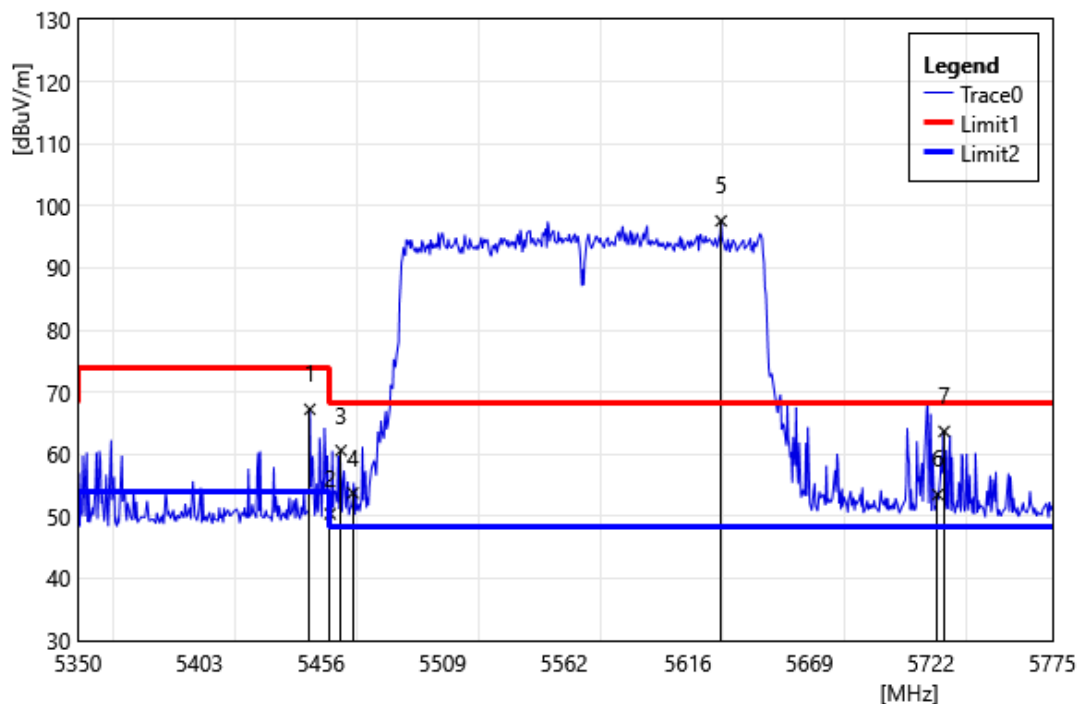


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.15	67.80	-0.56	67.24	74.00	-6.76	PEAK
2	5460.00	50.95	-0.55	50.40	74.00	-23.60	PEAK
3	5464.75	61.15	-0.55	60.60	68.20	-7.60	PEAK
4	5470.00	54.30	-0.54	53.76	68.20	-14.44	PEAK
5	5630.50	98.17	-0.59	97.58	68.20	29.38	PEAK
6	5725.00	53.82	-0.32	53.50	68.20	-14.70	PEAK
7	5727.83	63.98	-0.30	63.68	68.20	-4.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

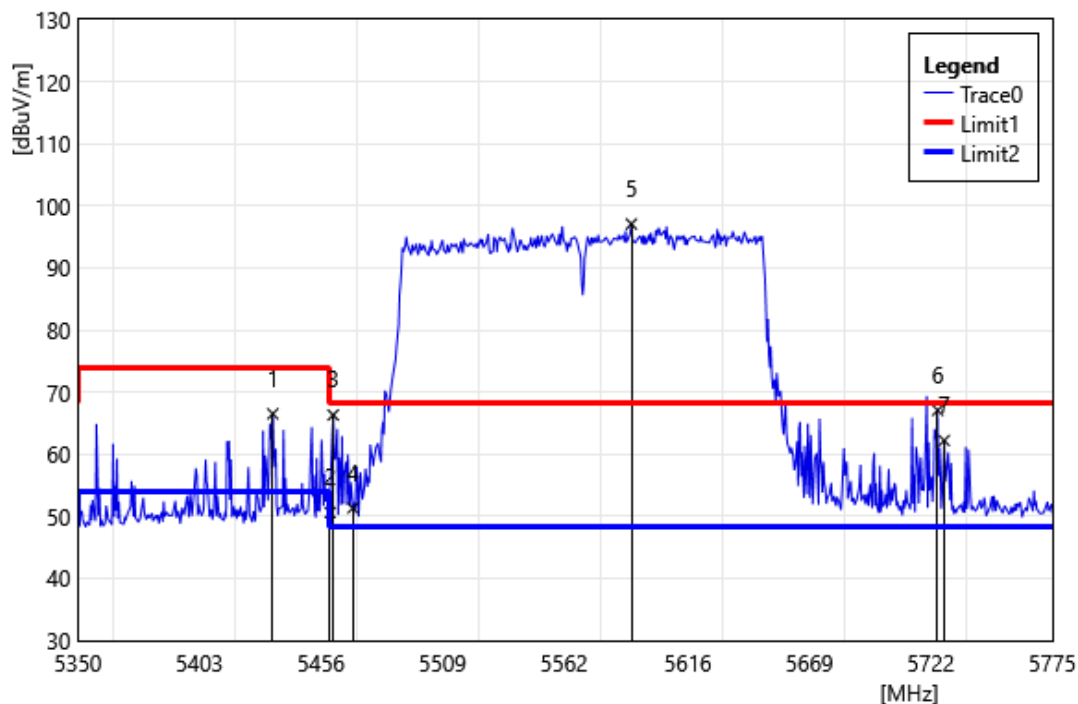


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5435.00	67.18	-0.67	66.51	74.00	-7.49	PEAK
2	5460.00	51.17	-0.55	50.62	74.00	-23.38	PEAK
3	5461.35	66.87	-0.55	66.32	68.20	-1.88	PEAK
4	5470.00	51.90	-0.54	51.36	68.20	-16.84	PEAK
5	5591.40	97.62	-0.54	97.08	68.20	28.88	PEAK
6	5725.00	67.40	-0.32	67.08	68.20	-1.12	PEAK
7	5727.83	62.52	-0.30	62.23	68.20	-5.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

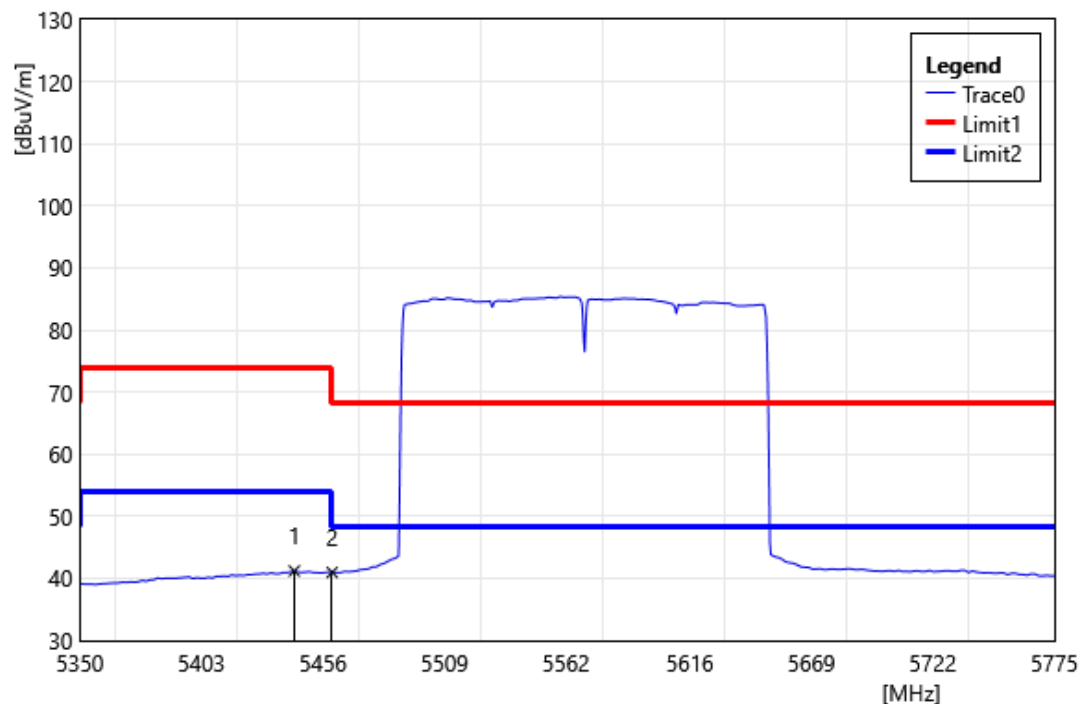

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5443.50	41.82	-0.61	41.21	54.00	-12.80	AVG
2	5460.00	41.52	-0.55	40.97	54.00	-13.03	AVG


Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

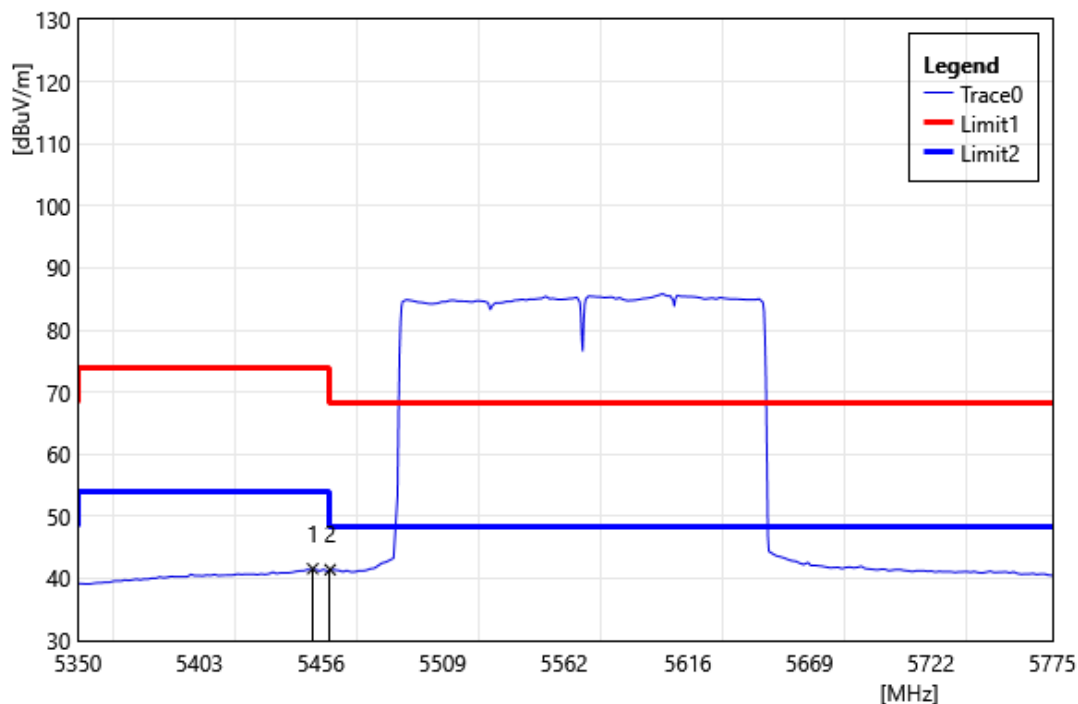

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.43	42.12	-0.56	41.56	54.00	-12.44	AVG
2	5460.00	41.95	-0.55	41.40	54.00	-12.60	AVG


2X2- Band Edge

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

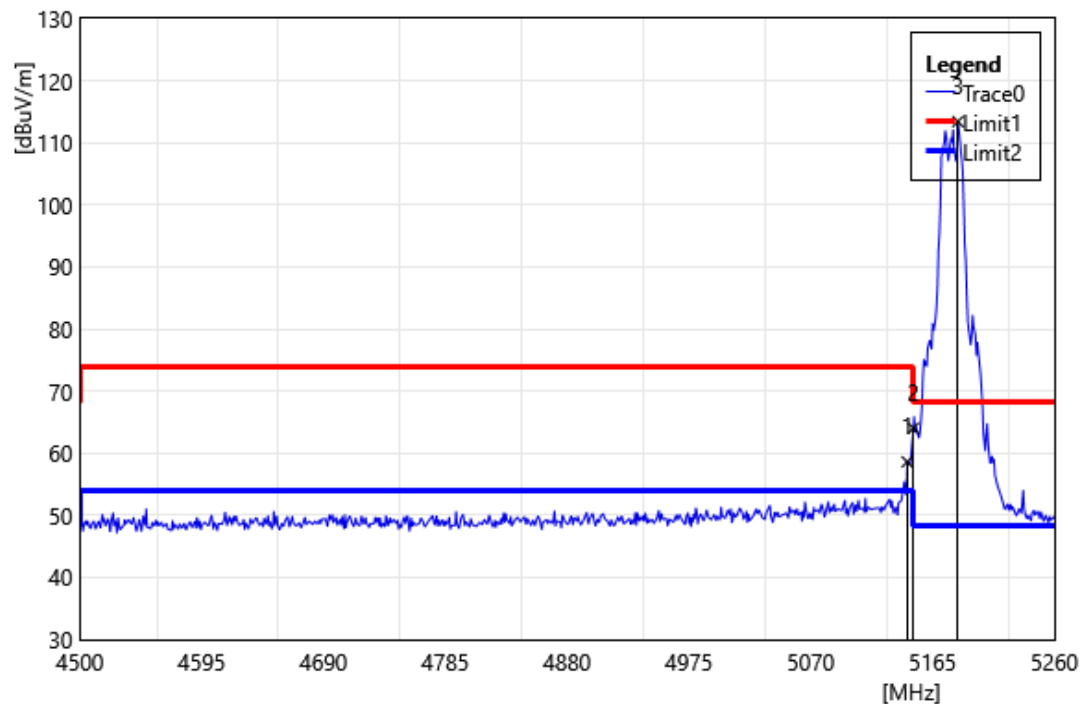


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	59.52	-0.90	58.62	74.00	-15.38	PEAK
2	5150.00	64.94	-0.91	64.03	74.00	-9.97	PEAK
3	5184.76	114.49	-1.08	113.41	68.20	45.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

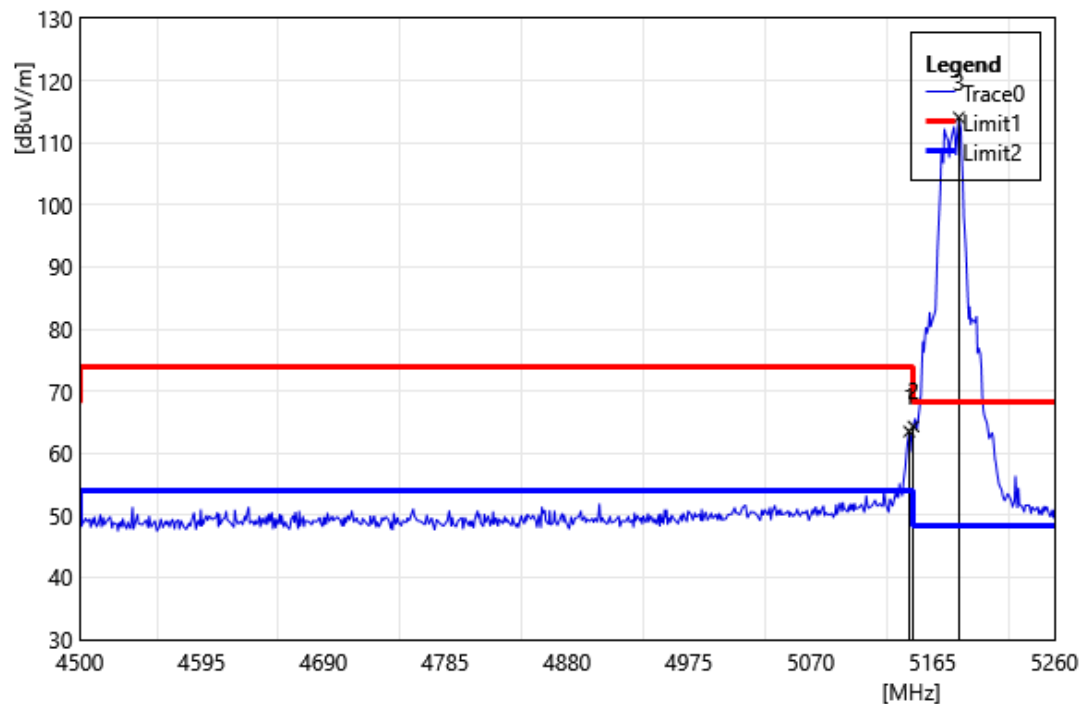


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	64.41	-0.90	63.51	74.00	-10.49	PEAK
2	5150.00	65.23	-0.91	64.33	74.00	-9.67	PEAK
3	5185.52	115.15	-1.08	114.07	68.20	45.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

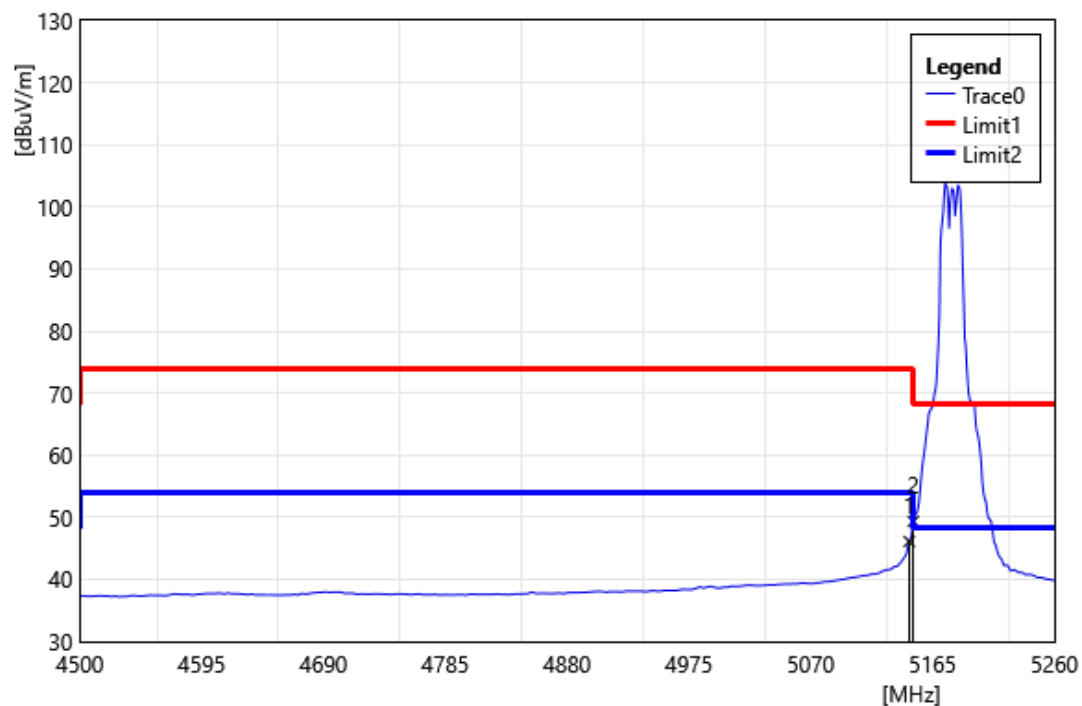


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	47.00	-0.90	46.11	54.00	-7.90	AVG
2	5150.00	50.26	-0.91	49.35	54.00	-4.65	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

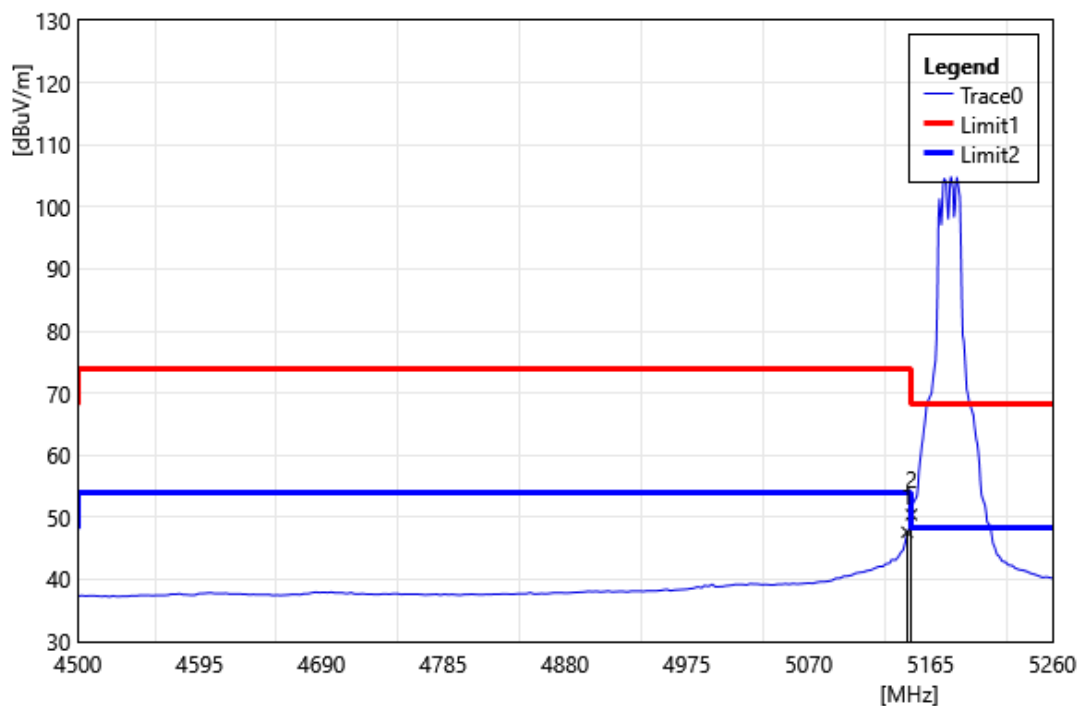


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	48.51	-0.90	47.61	54.00	-6.39	AVG
2	5150.00	51.35	-0.91	50.44	54.00	-3.56	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5200 MHz		
Polarization:	Vertical		
Remark:			

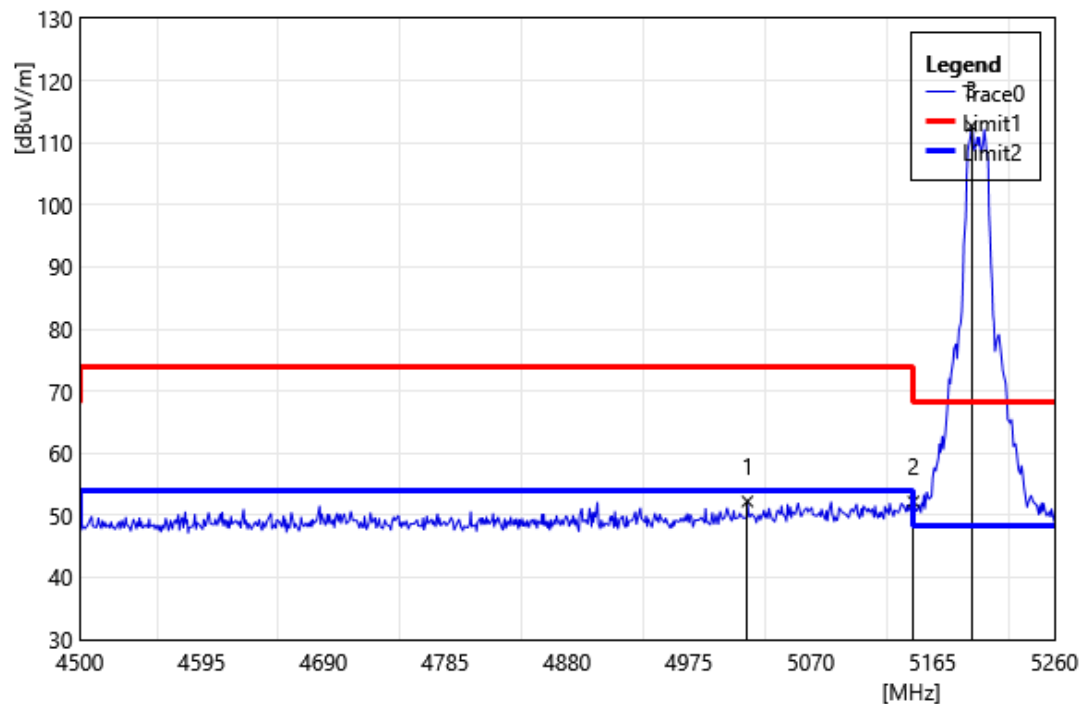


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5020.60	53.68	-1.44	52.24	74.00	-21.76	PEAK
2	5150.00	53.13	-0.91	52.22	74.00	-21.78	PEAK
3	5195.40	113.82	-1.13	112.69	68.20	44.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5200 MHz		
Polarization:	Horizontal		
Remark:			

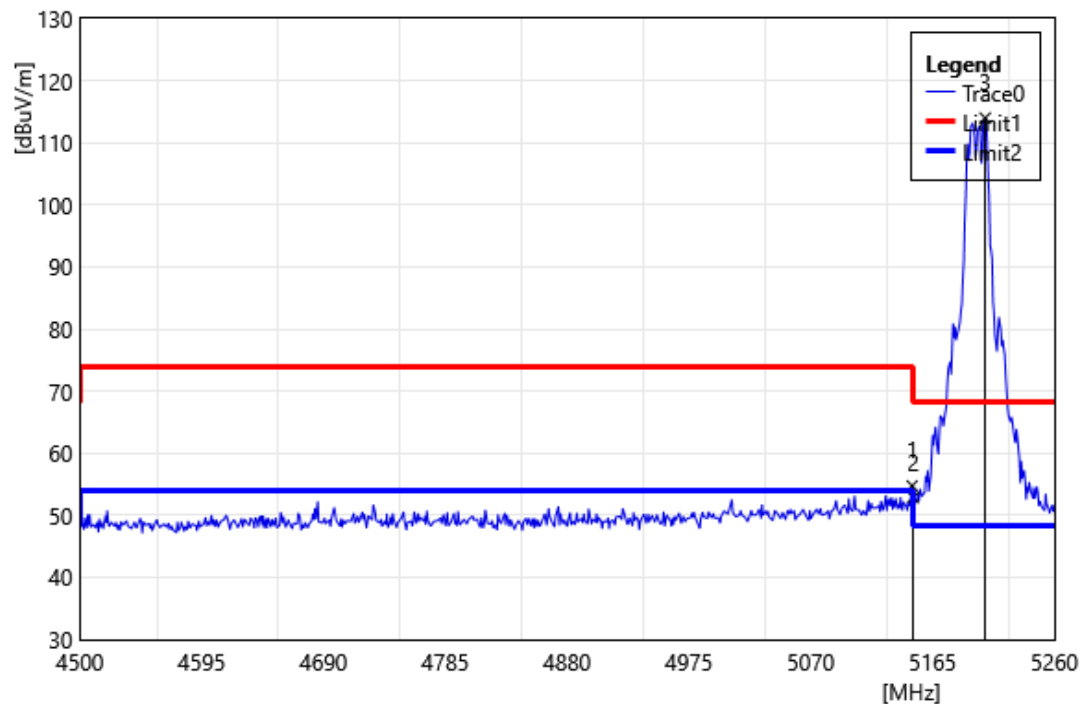


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5149.04	55.65	-0.91	54.74	74.00	-19.26	PEAK
2	5150.00	53.78	-0.91	52.88	74.00	-21.12	PEAK
3	5206.04	115.19	-1.20	113.99	68.20	45.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5200 MHz		
Polarization:	Vertical		
Remark:			

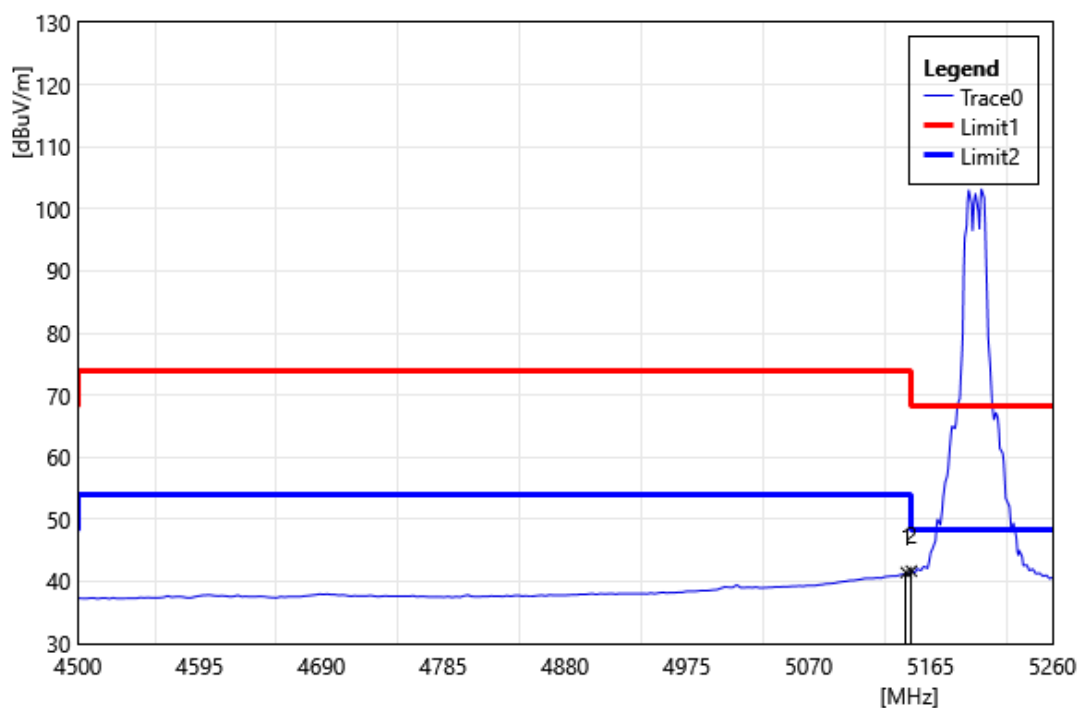


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	42.34	-0.90	41.44	54.00	-12.56	AVG
2	5150.00	42.57	-0.91	41.66	54.00	-12.34	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5200 MHz		
Polarization:	Horizontal		
Remark:			

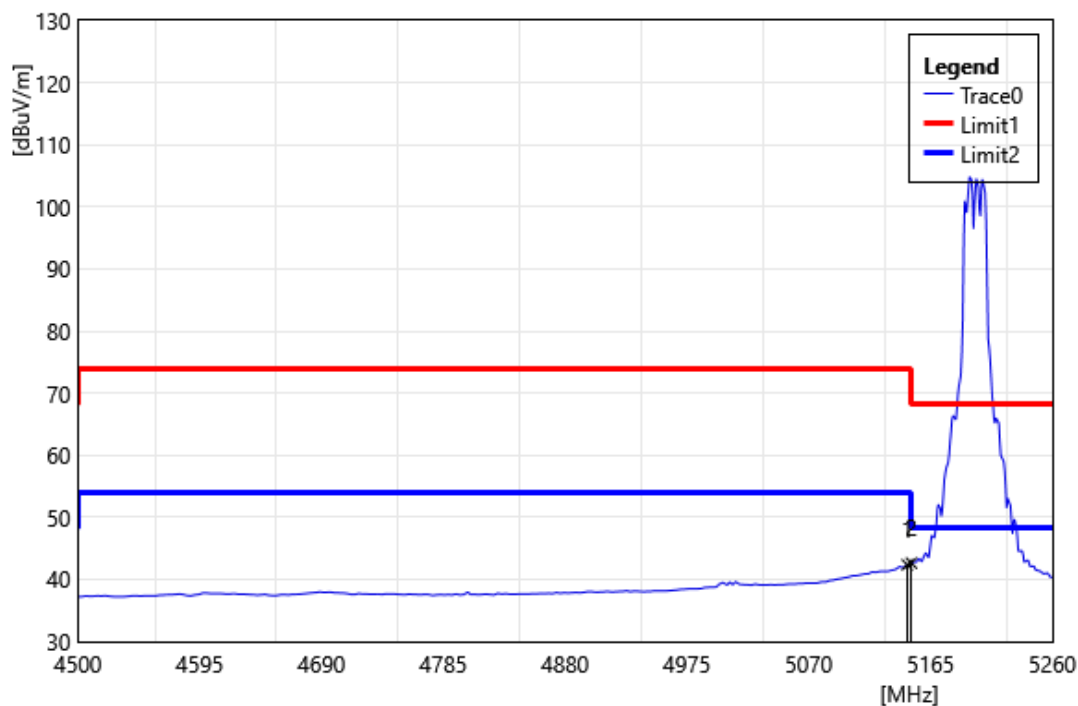


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	43.26	-0.90	42.36	54.00	-11.64	AVG
2	5150.00	43.55	-0.91	42.64	54.00	-11.36	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Vertical		
Remark:			

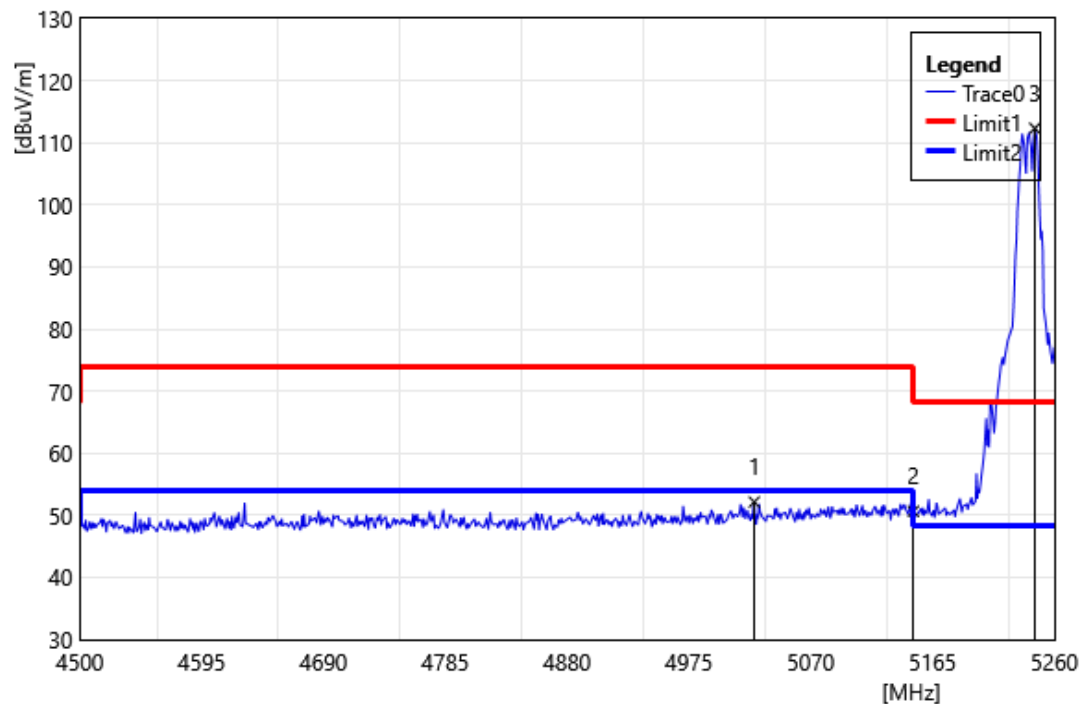


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5025.92	53.53	-1.38	52.15	74.00	-21.85	PEAK
2	5150.00	51.57	-0.91	50.66	74.00	-23.34	PEAK
3	5244.80	113.79	-1.46	112.33	68.20	44.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Horizontal		
Remark:			

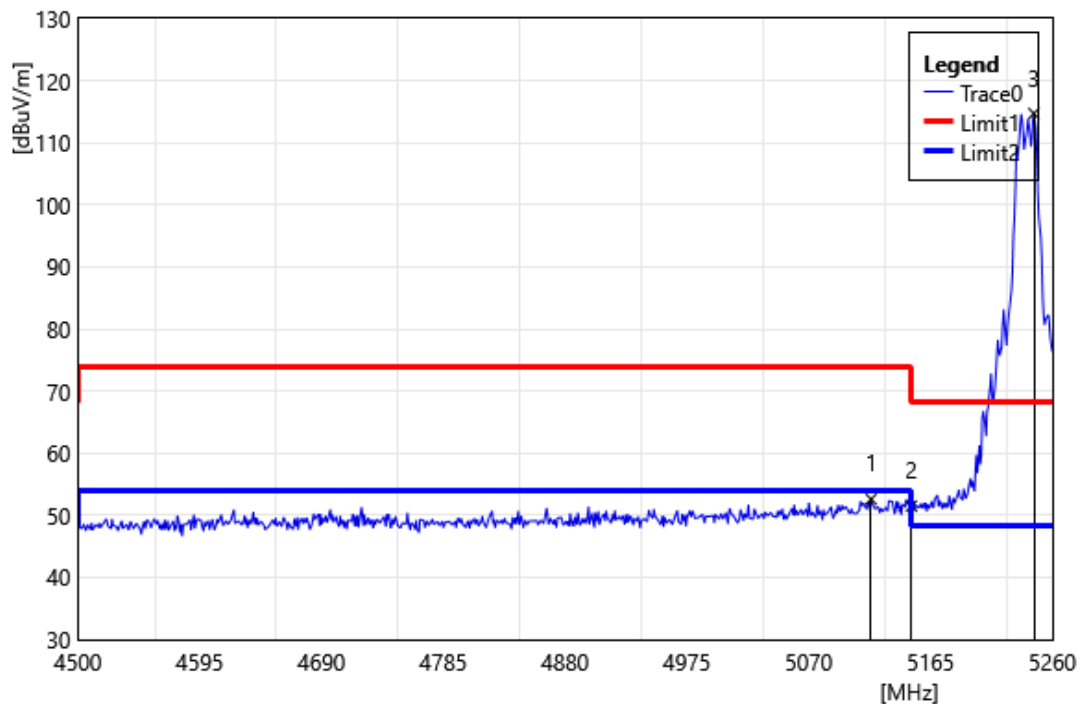


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5118.64	53.48	-0.88	52.60	74.00	-21.40	PEAK
2	5150.00	52.41	-0.91	51.50	74.00	-22.50	PEAK
3	5245.56	116.19	-1.47	114.72	68.20	46.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Vertical		
Remark:			

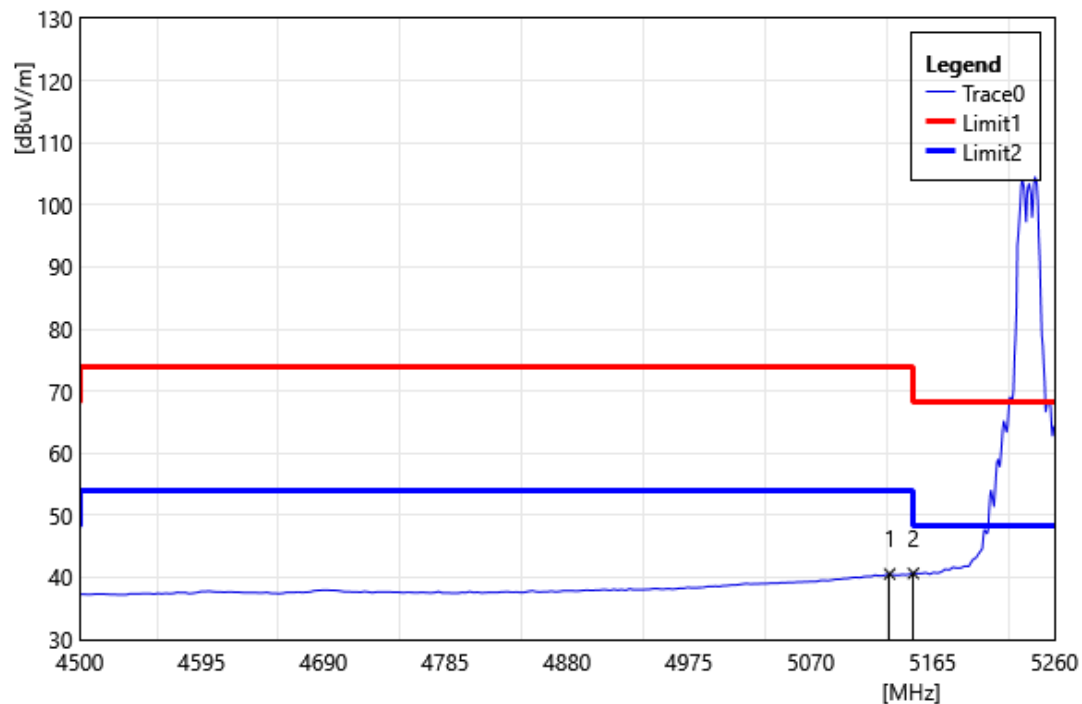


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5131.56	41.45	-0.89	40.56	54.00	-13.44	AVG
2	5150.00	41.56	-0.91	40.65	54.00	-13.35	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5240 MHz		
Polarization:	Horizontal		
Remark:			

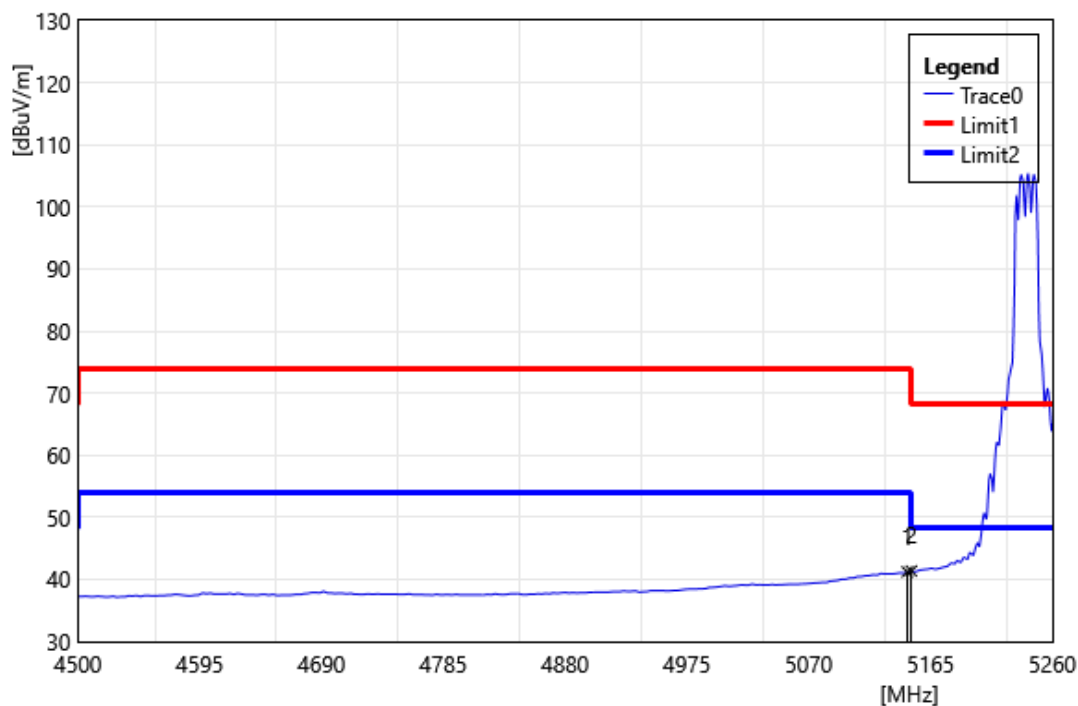


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	42.12	-0.90	41.23	54.00	-12.78	AVG
2	5150.00	42.26	-0.91	41.36	54.00	-12.64	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5260 MHz		
Polarization:	Vertical		
Remark:			

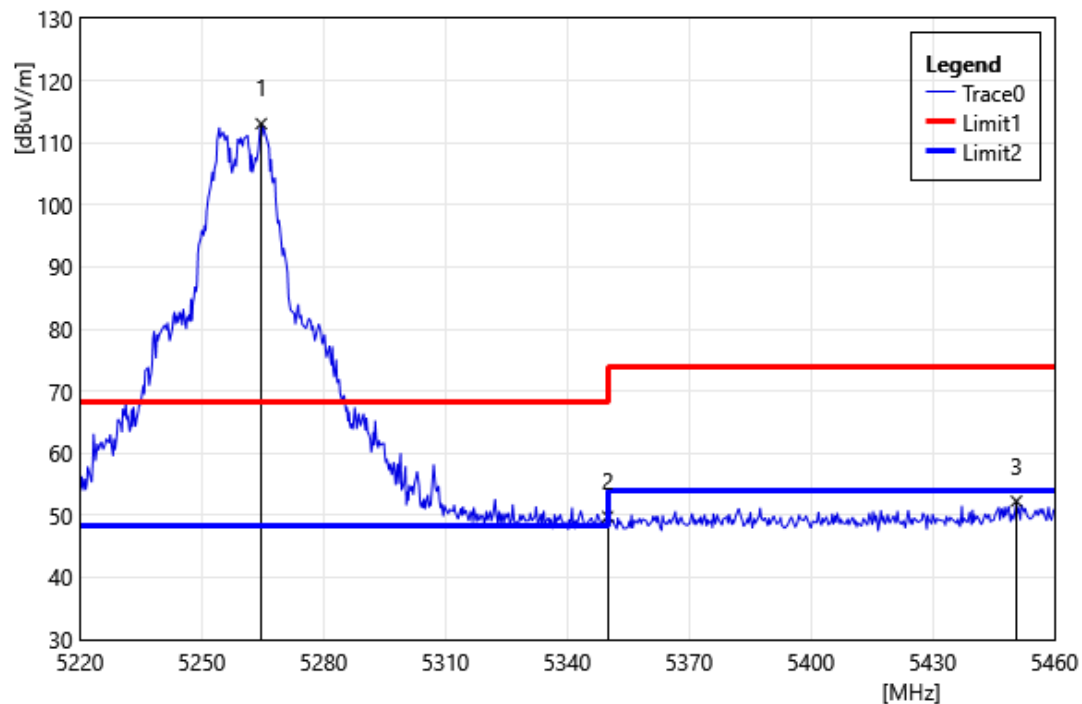


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5264.64	114.61	-1.54	113.07	68.20	44.87	PEAK
2	5350.00	51.07	-1.29	49.78	74.00	-24.22	PEAK
3	5450.64	52.86	-0.58	52.28	74.00	-21.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5260 MHz		
Polarization:	Horizontal		
Remark:			

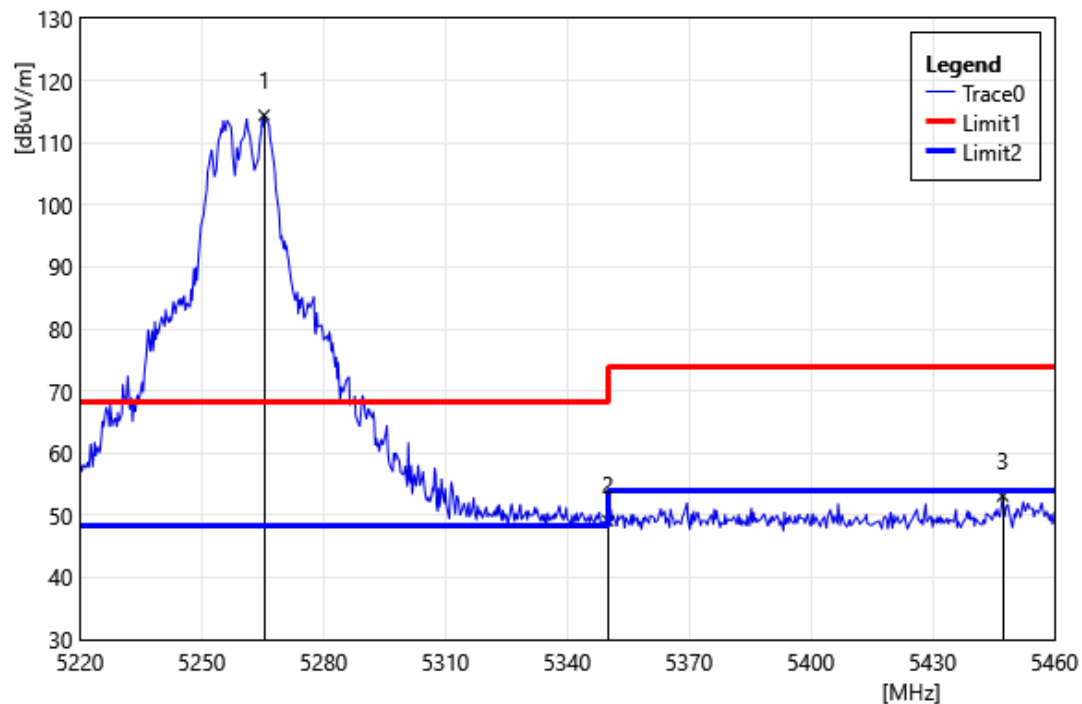


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5265.36	115.98	-1.54	114.44	68.20	46.24	PEAK
2	5350.00	50.45	-1.29	49.16	74.00	-24.84	PEAK
3	5447.28	53.72	-0.60	53.12	74.00	-20.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5260 MHz		
Polarization:	Vertical		
Remark:			

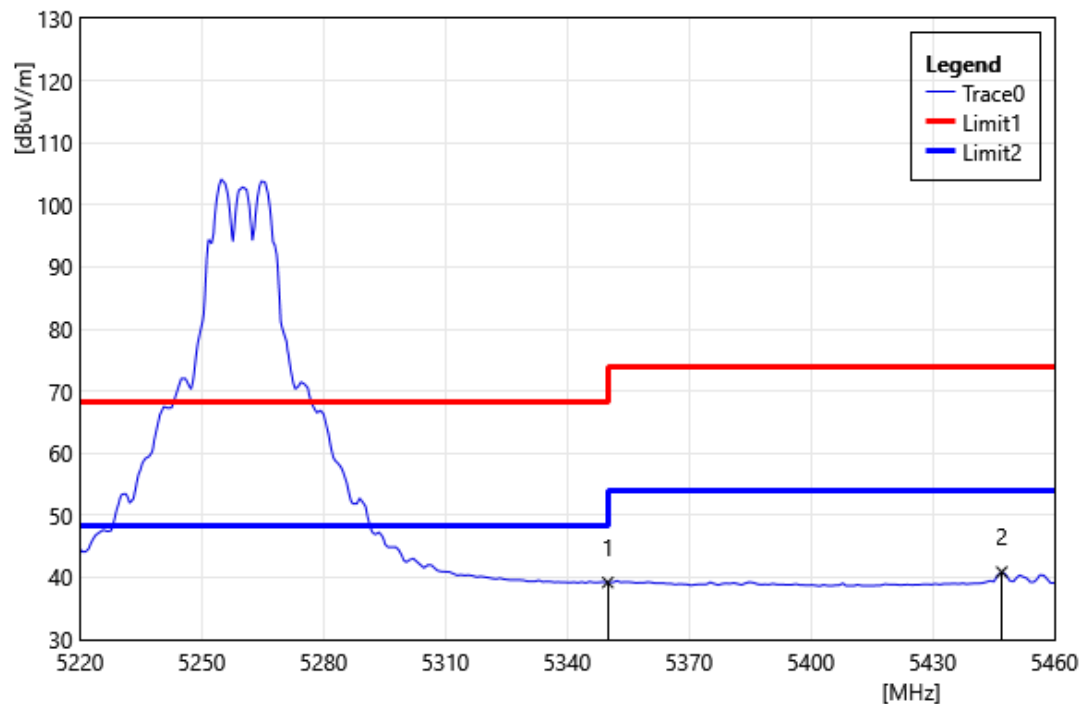


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.49	-1.29	39.19	54.00	-14.81	AVG
2	5447.04	41.47	-0.60	40.87	54.00	-13.13	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5260 MHz		
Polarization:	Horizontal		
Remark:			

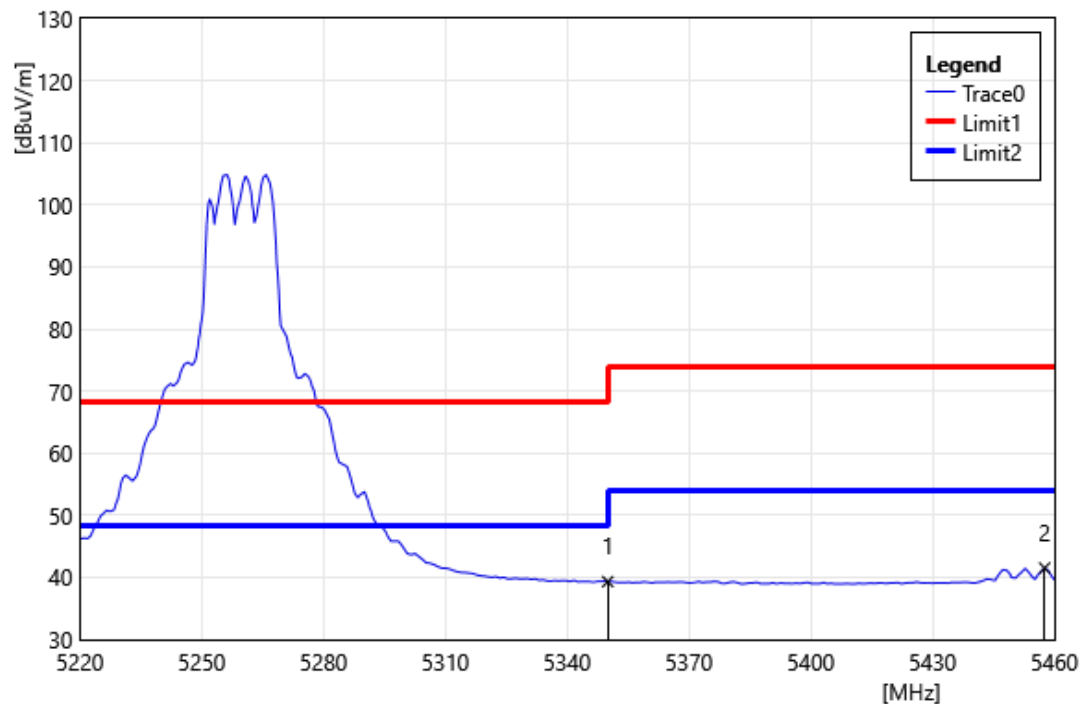


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.61	-1.29	39.32	54.00	-14.68	AVG
2	5457.60	42.10	-0.58	41.52	54.00	-12.48	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5280 MHz		
Polarization:	Vertical		
Remark:			

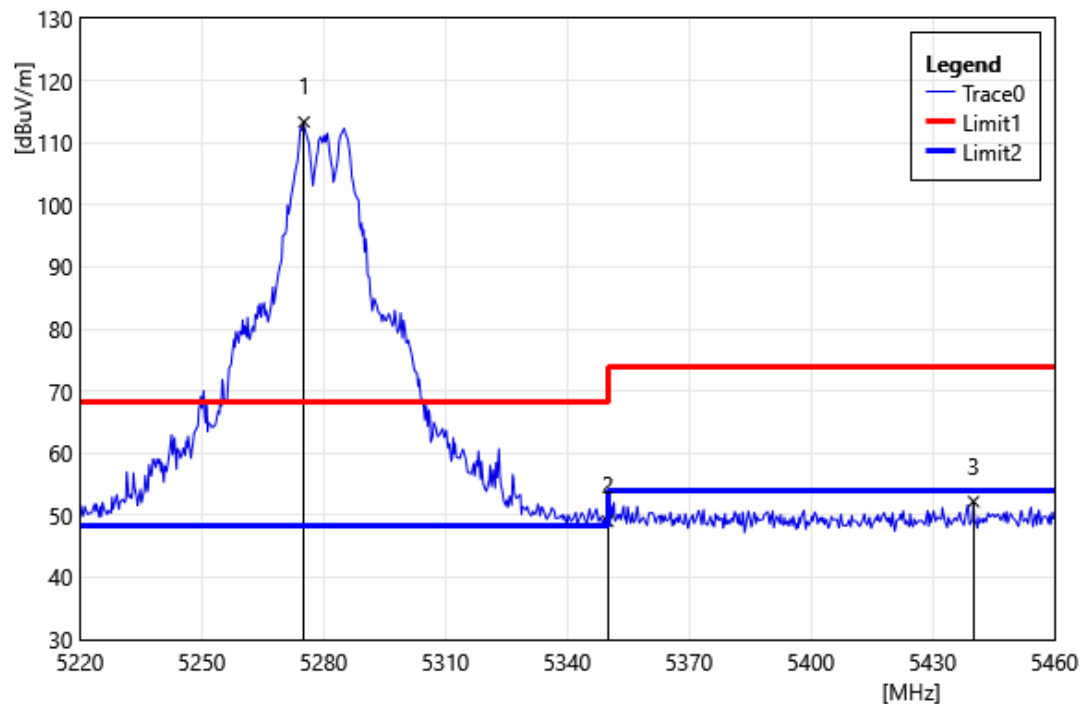


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5275.20	114.93	-1.57	113.36	68.20	45.16	PEAK
2	5350.00	50.32	-1.29	49.03	74.00	-24.97	PEAK
3	5440.08	52.87	-0.65	52.22	74.00	-21.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5280 MHz		
Polarization:	Horizontal		
Remark:			

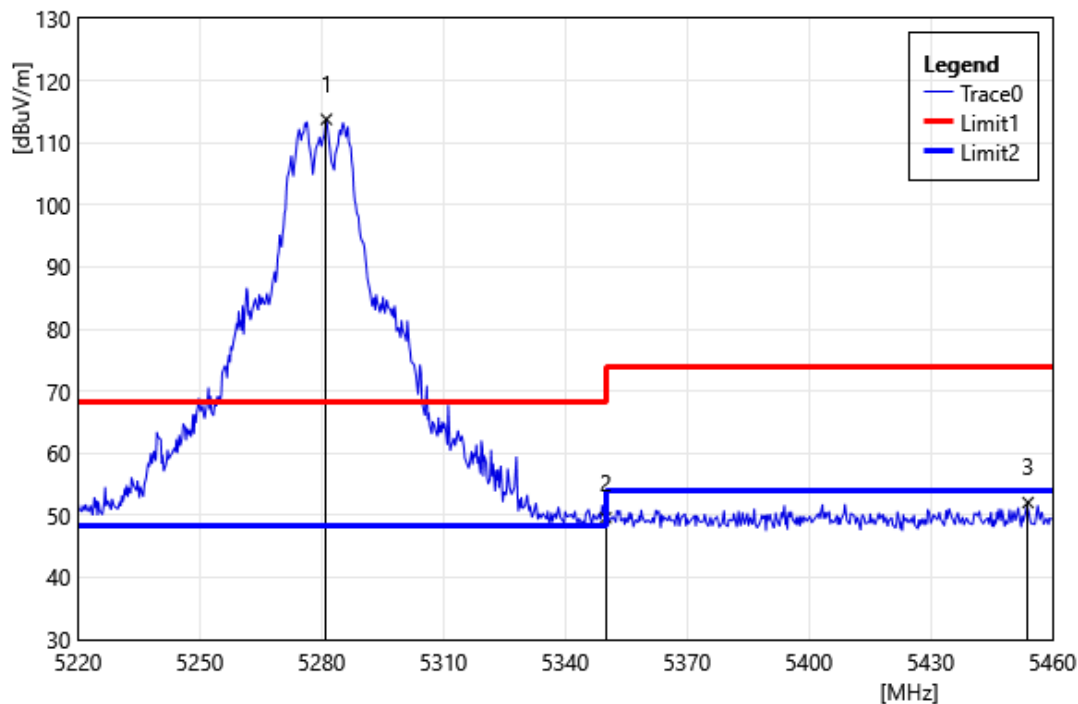


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5281.20	115.36	-1.59	113.77	68.20	45.57	PEAK
2	5350.00	50.90	-1.29	49.60	74.00	-24.40	PEAK
3	5454.00	52.62	-0.58	52.04	74.00	-21.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5280 MHz		
Polarization:	Vertical		
Remark:			

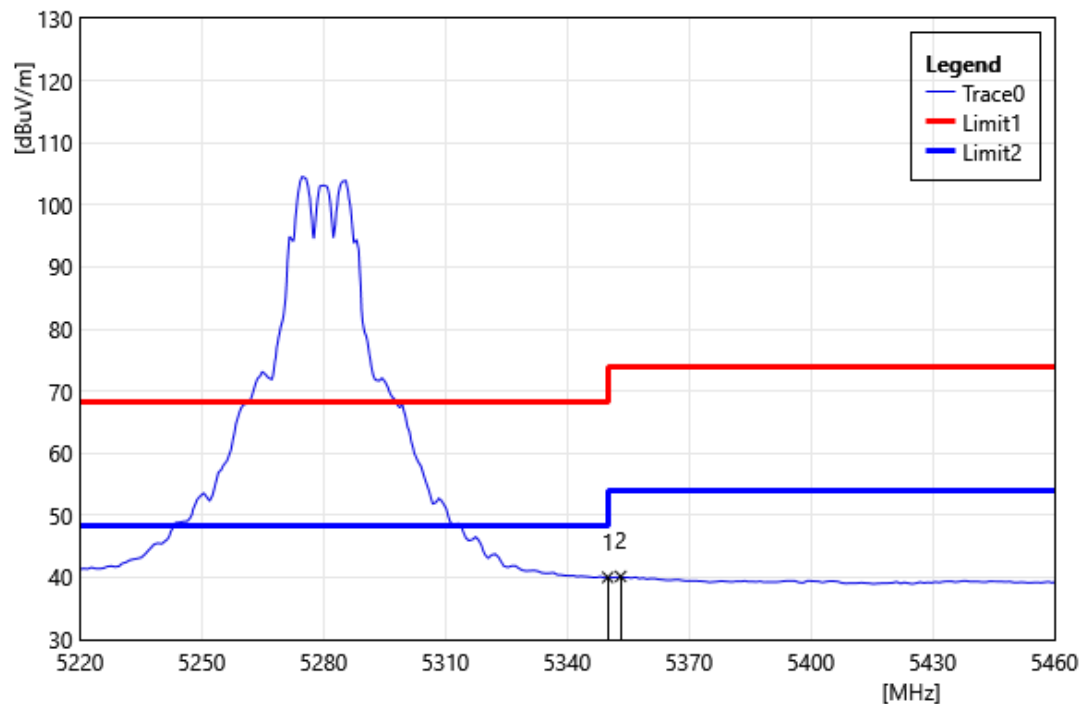


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.31	-1.29	40.02	54.00	-13.98	AVG
2	5353.20	41.44	-1.27	40.17	54.00	-13.83	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5280 MHz		
Polarization:	Horizontal		
Remark:			

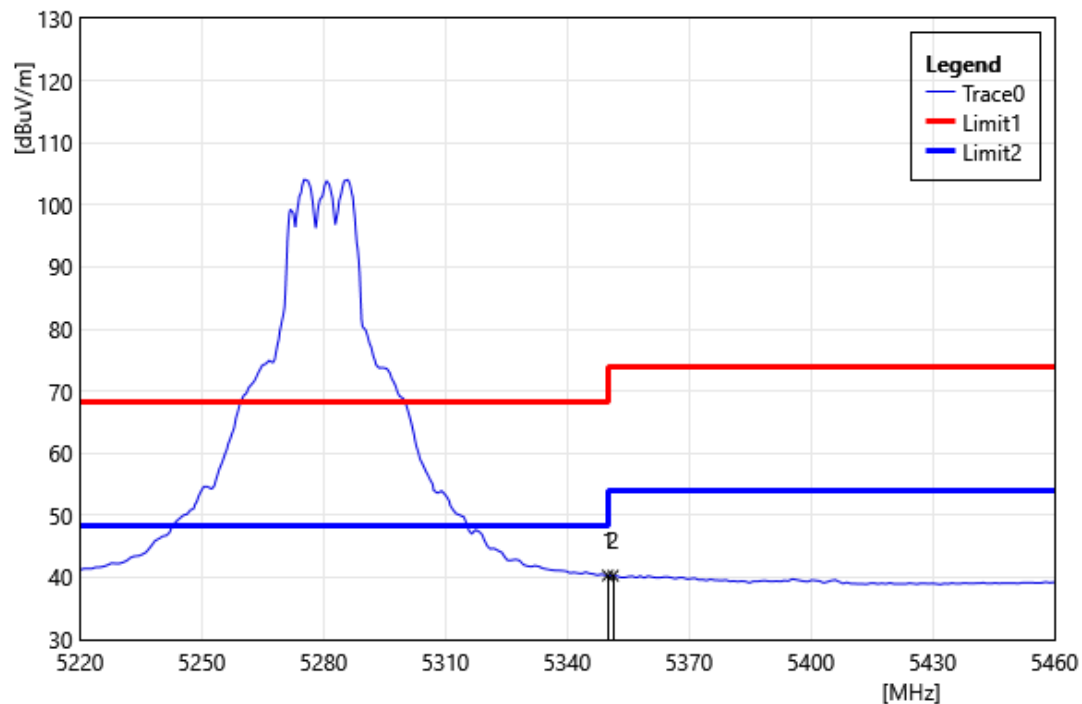


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.61	-1.29	40.32	54.00	-13.68	AVG
2	5351.28	41.55	-1.28	40.27	54.00	-13.73	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Vertical		
Remark:			

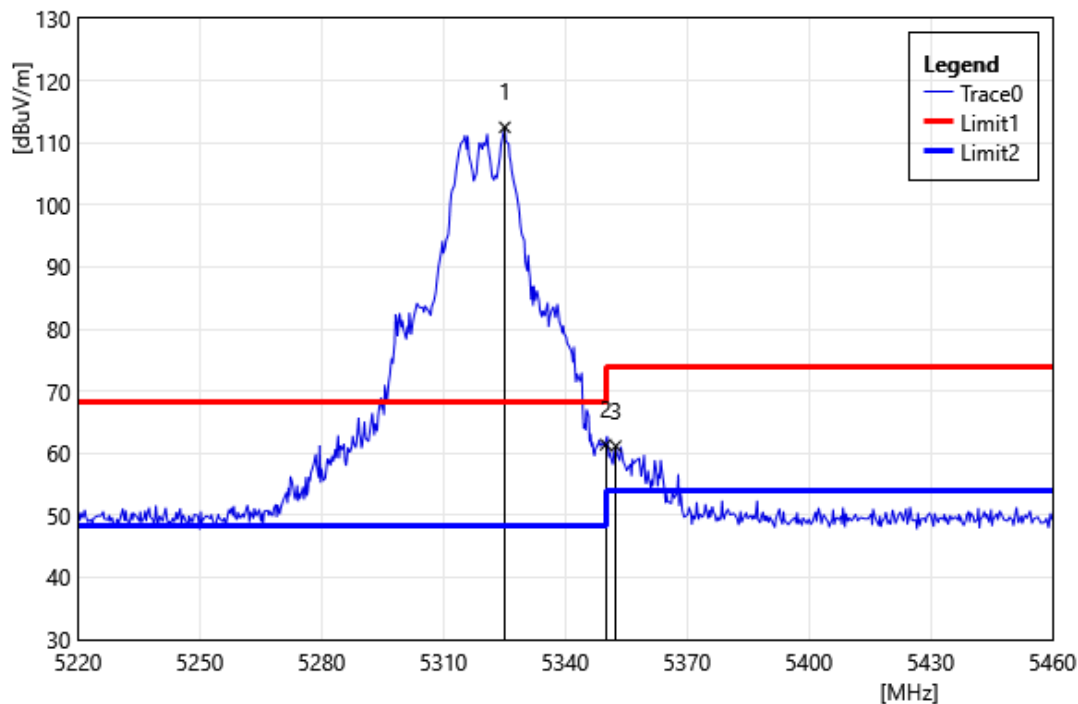


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5325.12	113.97	-1.47	112.50	68.20	44.30	PEAK
2	5350.00	62.68	-1.29	61.39	74.00	-12.61	PEAK
3	5352.48	62.41	-1.27	61.14	74.00	-12.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

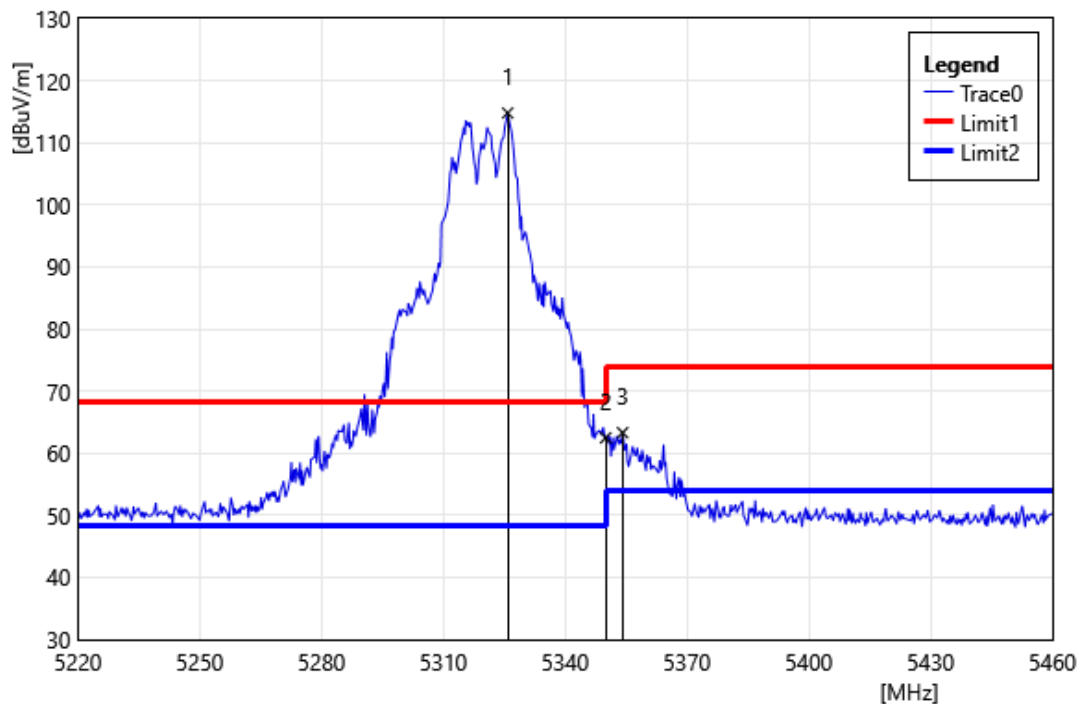


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5325.84	116.26	-1.46	114.80	68.20	46.60	PEAK
2	5350.00	63.78	-1.29	62.49	74.00	-11.51	PEAK
3	5354.16	64.57	-1.26	63.31	74.00	-10.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Vertical		
Remark:			

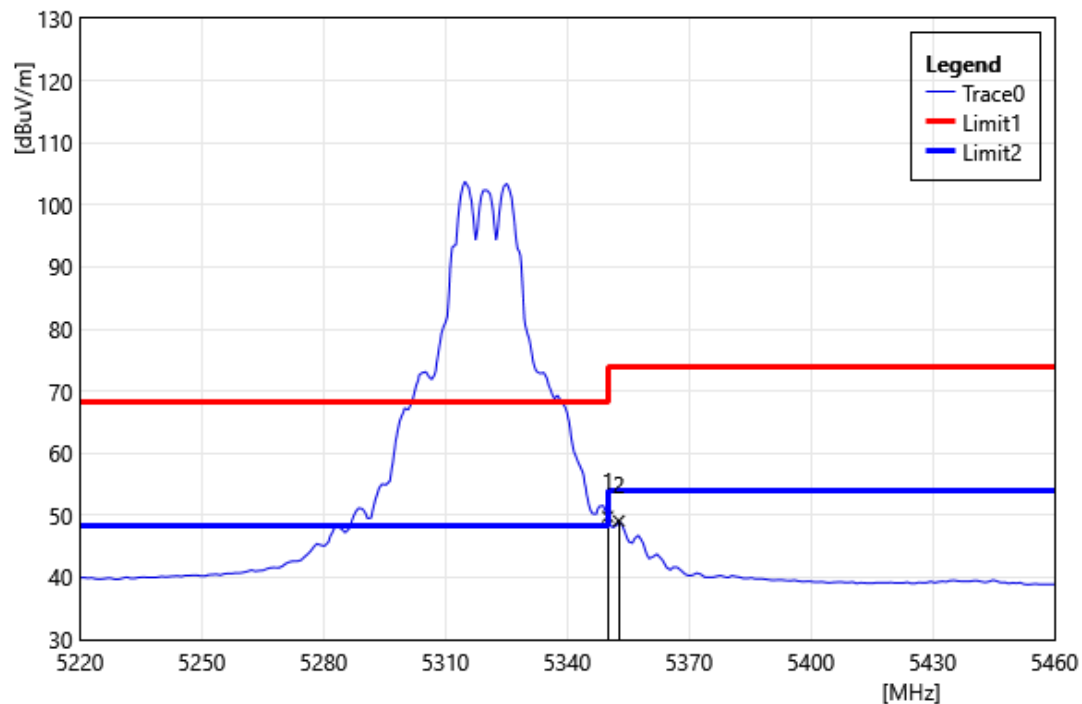


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	51.08	-1.29	49.79	54.00	-4.21	AVG
2	5352.72	50.36	-1.27	49.09	54.00	-4.91	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

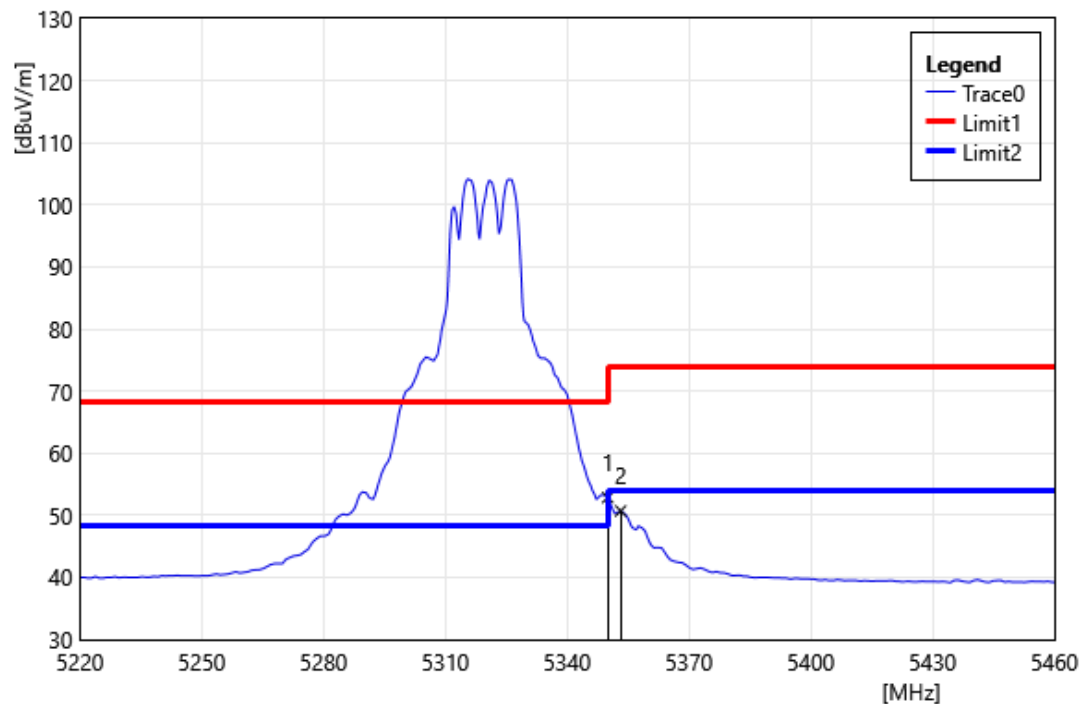


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	54.16	-1.29	52.87	54.00	-1.13	AVG
2	5353.20	51.98	-1.27	50.71	54.00	-3.29	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

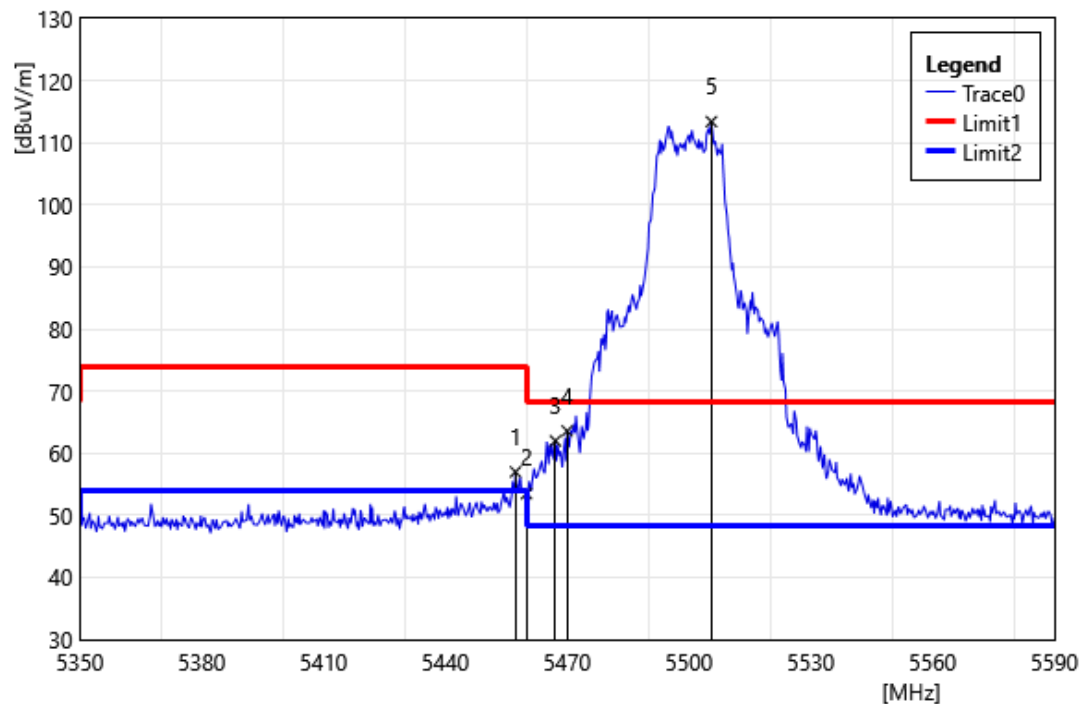


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.28	57.58	-0.58	57.00	74.00	-17.01	PEAK
2	5460.00	54.06	-0.57	53.49	74.00	-20.51	PEAK
3	5467.12	62.56	-0.57	61.99	68.20	-6.21	PEAK
4	5470.00	64.15	-0.56	63.59	68.20	-4.61	PEAK
5	5505.52	113.94	-0.53	113.41	68.20	45.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

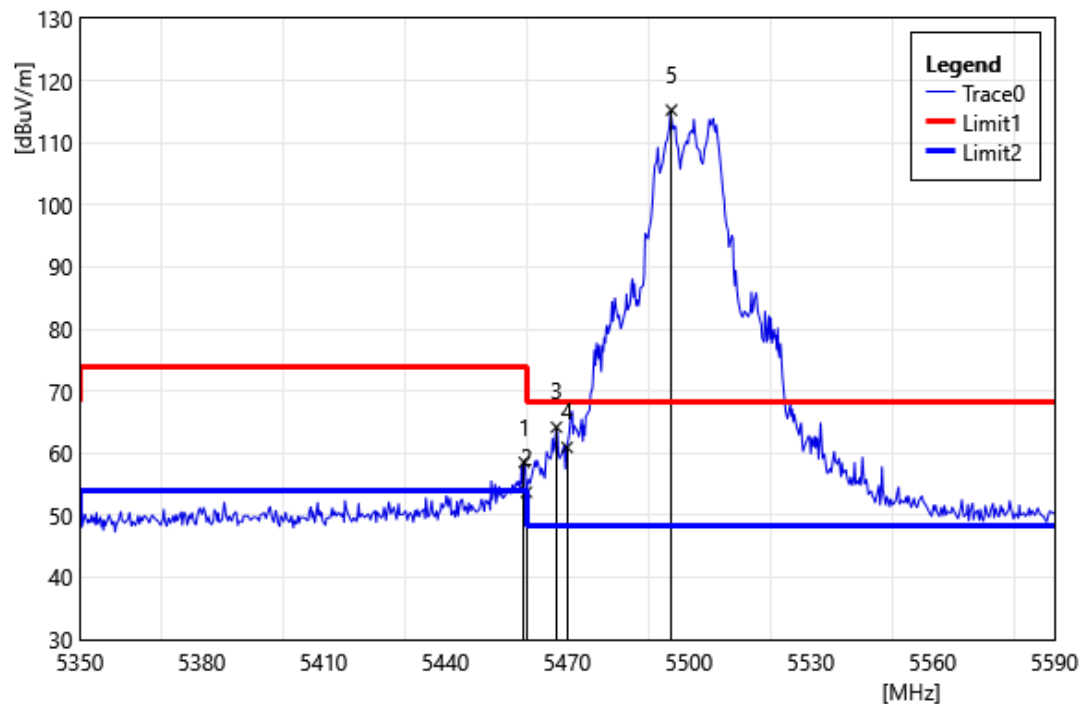


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.44	59.10	-0.57	58.53	74.00	-15.47	PEAK
2	5460.00	54.30	-0.57	53.73	74.00	-20.27	PEAK
3	5467.36	64.77	-0.57	64.20	68.20	-4.00	PEAK
4	5470.00	61.50	-0.56	60.94	68.20	-7.26	PEAK
5	5495.68	115.78	-0.53	115.26	68.20	47.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

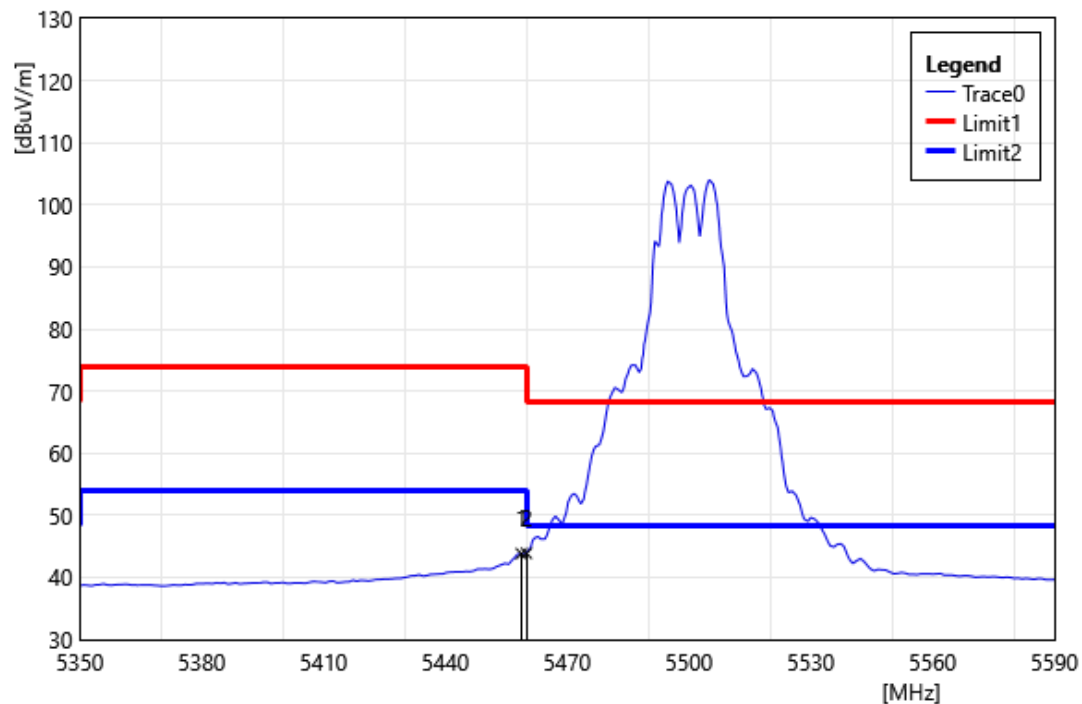


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	44.40	-0.57	43.83	54.00	-10.17	AVG
2	5460.00	44.46	-0.57	43.89	54.00	-10.11	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

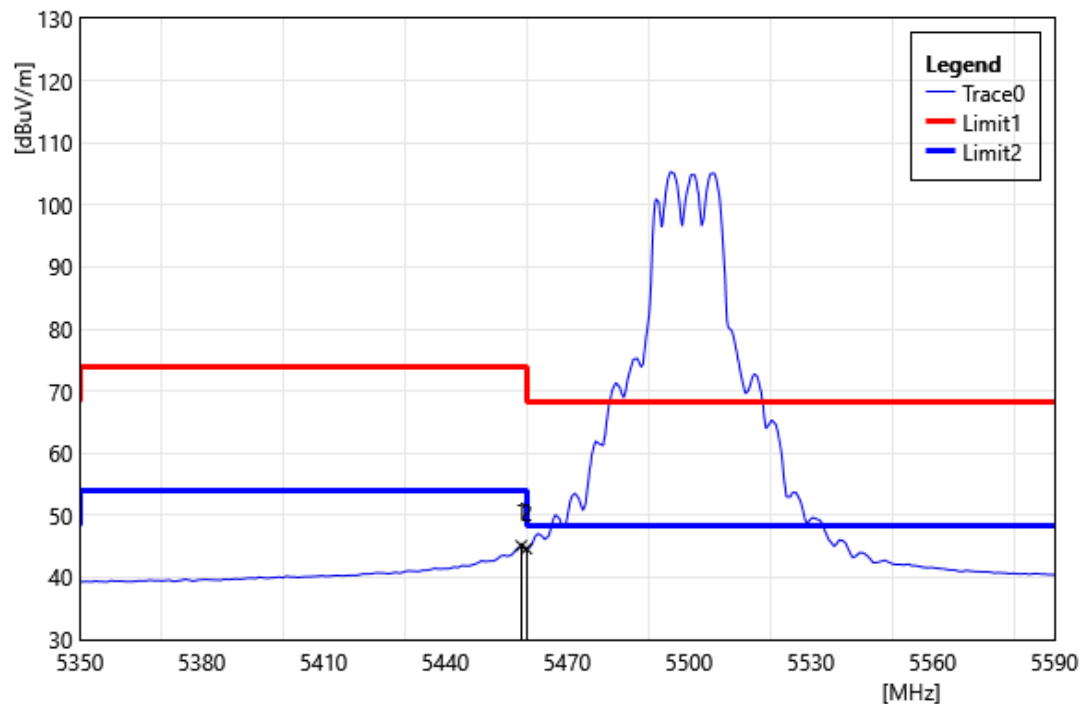


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	45.66	-0.57	45.09	54.00	-8.91	AVG
2	5460.00	45.21	-0.57	44.64	54.00	-9.36	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

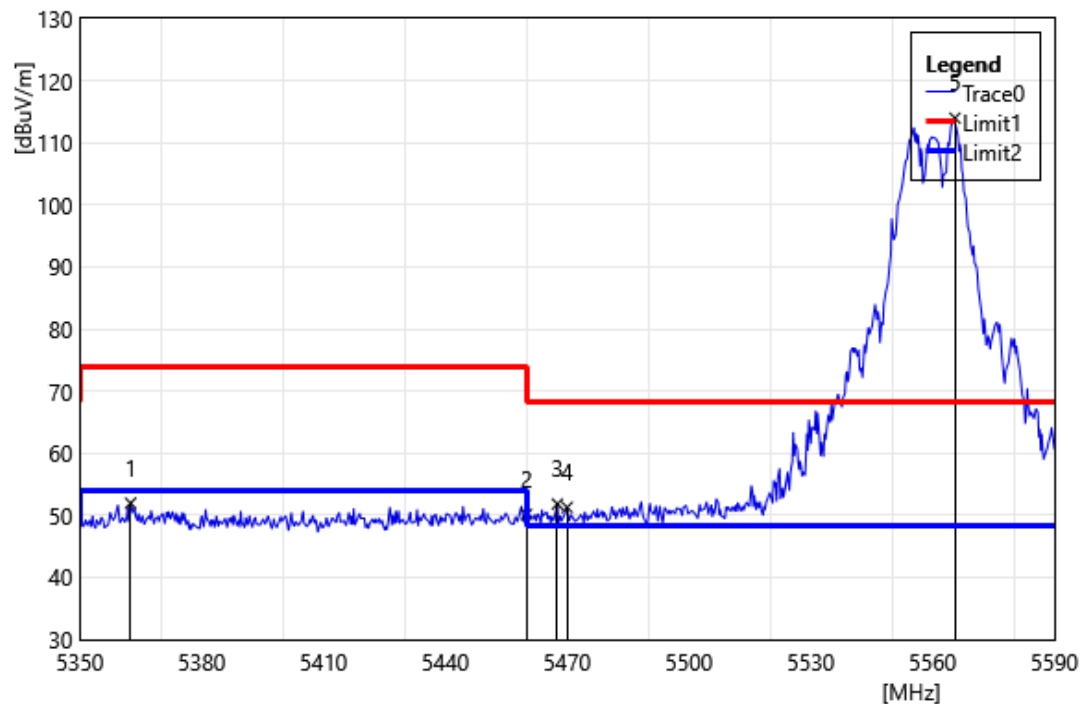


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5362.48	53.16	-1.20	51.96	74.00	-22.04	PEAK
2	5460.00	50.71	-0.57	50.14	74.00	-23.86	PEAK
3	5467.60	52.39	-0.56	51.83	68.20	-16.37	PEAK
4	5470.00	51.85	-0.56	51.29	68.20	-16.91	PEAK
5	5565.52	114.50	-0.52	113.98	68.20	45.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

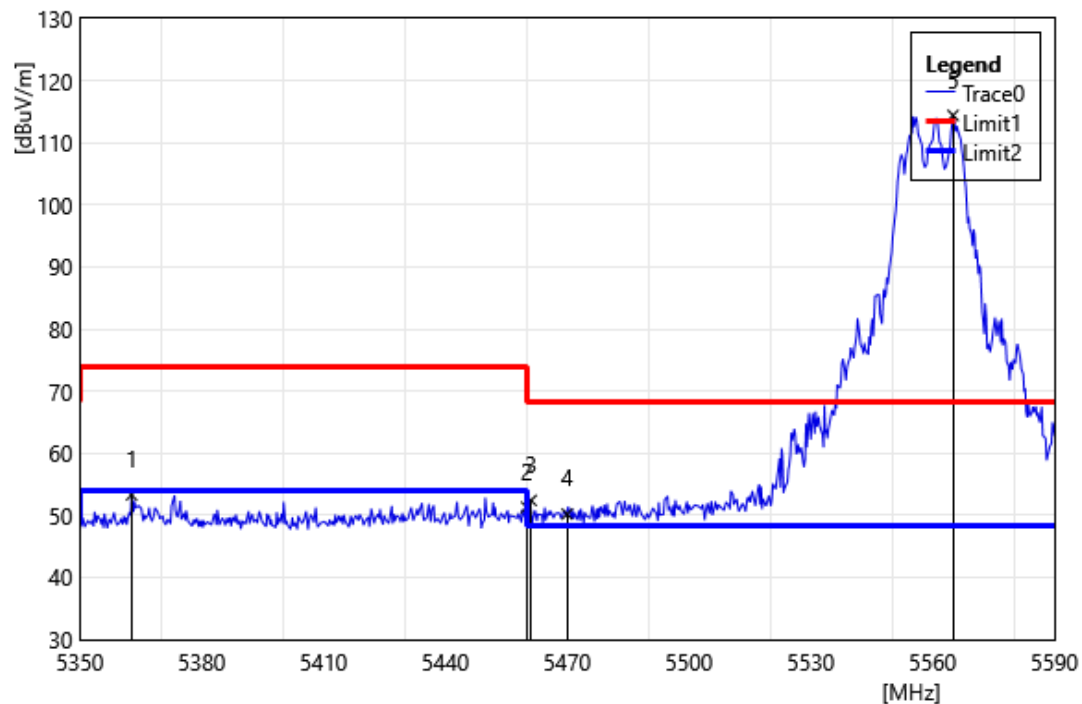


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5362.72	54.49	-1.20	53.29	74.00	-20.71	PEAK
2	5460.00	51.88	-0.57	51.31	74.00	-22.69	PEAK
3	5461.12	52.97	-0.57	52.40	68.20	-15.80	PEAK
4	5470.00	50.77	-0.56	50.21	68.20	-17.99	PEAK
5	5565.04	114.94	-0.52	114.42	68.20	46.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

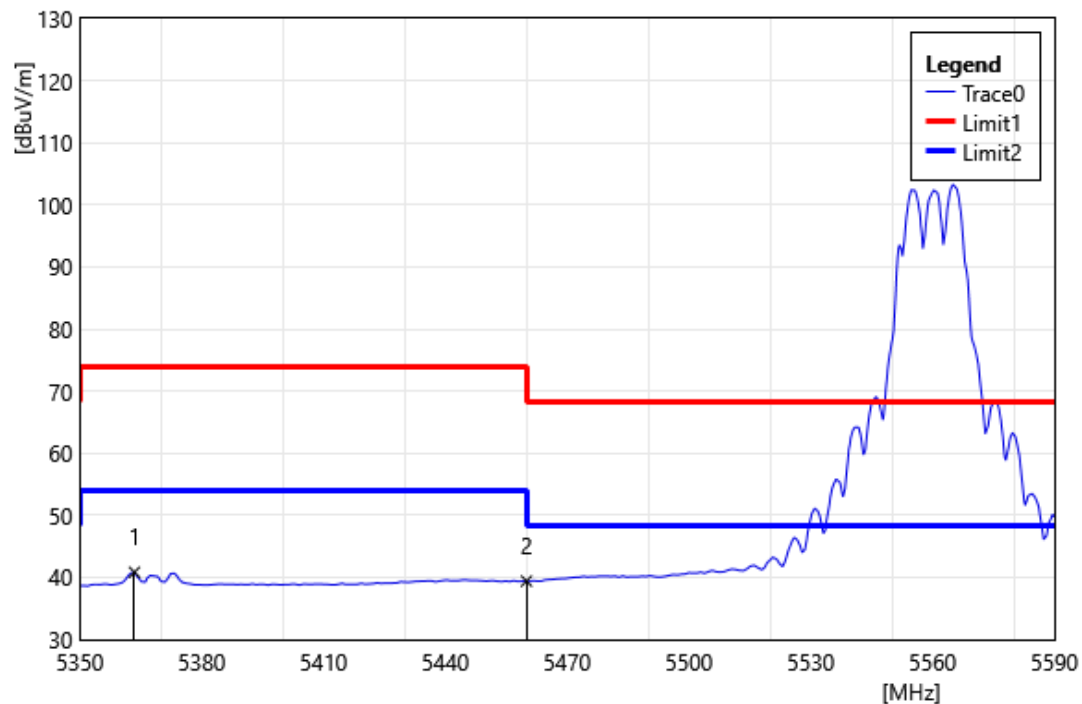


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5363.44	42.03	-1.20	40.83	54.00	-13.17	AVG
2	5460.00	39.98	-0.57	39.41	54.00	-14.59	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

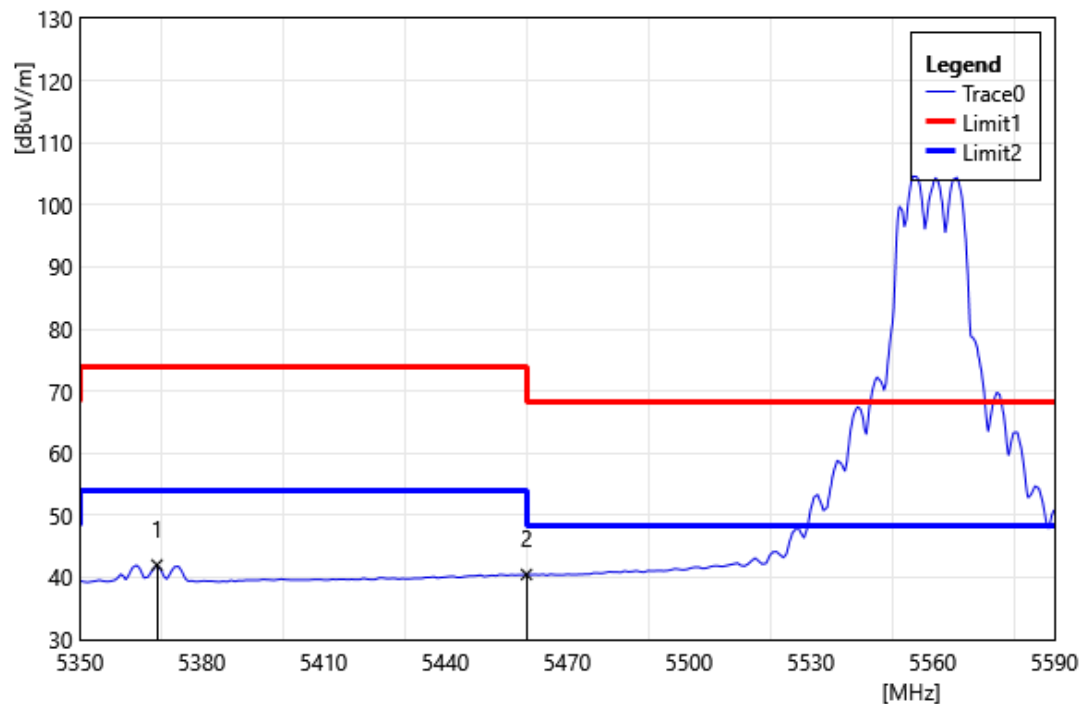


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5368.96	43.16	-1.16	42.00	54.00	-12.00	AVG
2	5460.00	41.04	-0.57	40.47	54.00	-13.53	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5700 MHz		
Polarization:	Vertical		
Remark:			

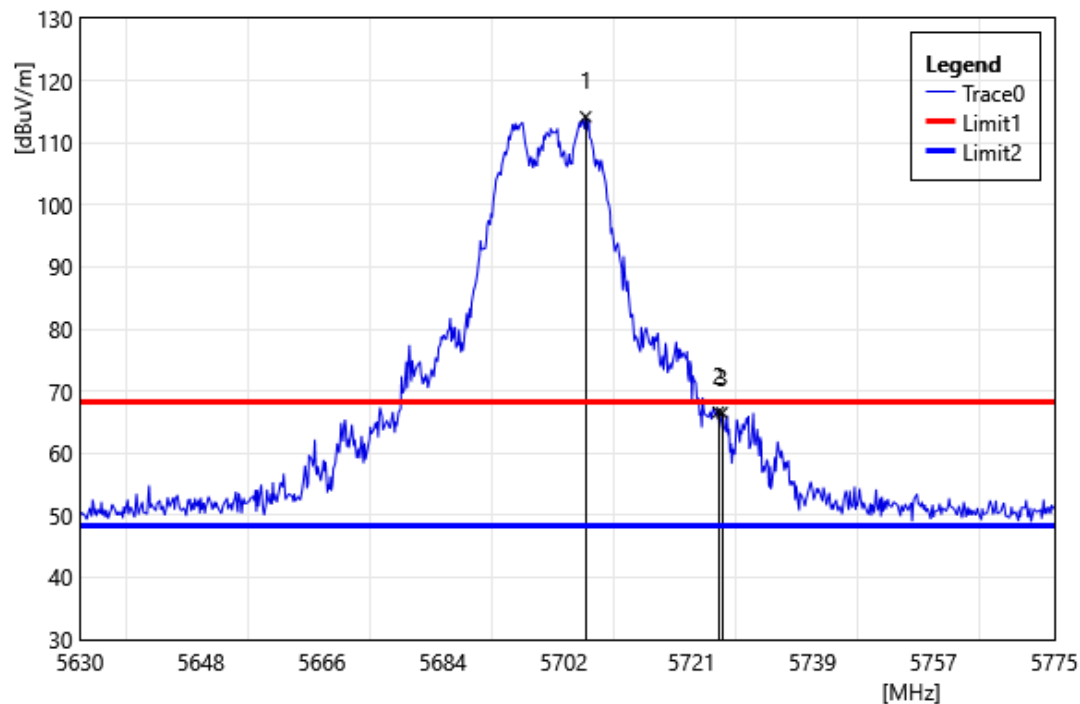


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5705.26	114.73	-0.55	114.18	68.20	45.98	PEAK
2	5725.00	66.95	-0.34	66.61	68.20	-1.59	PEAK
3	5725.56	66.86	-0.34	66.52	68.20	-1.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5700 MHz		
Polarization:	Horizontal		
Remark:			

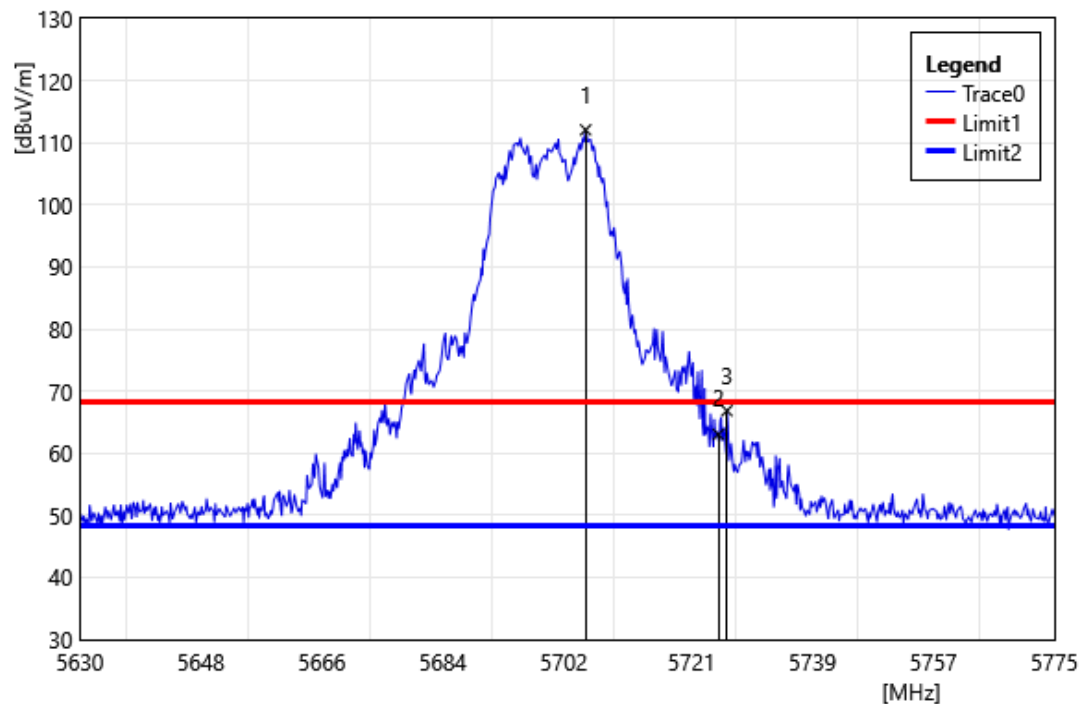


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5705.26	112.63	-0.55	112.08	68.20	43.88	PEAK
2	5725.00	63.38	-0.34	63.04	68.20	-5.16	PEAK
3	5726.28	67.18	-0.33	66.85	68.20	-1.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

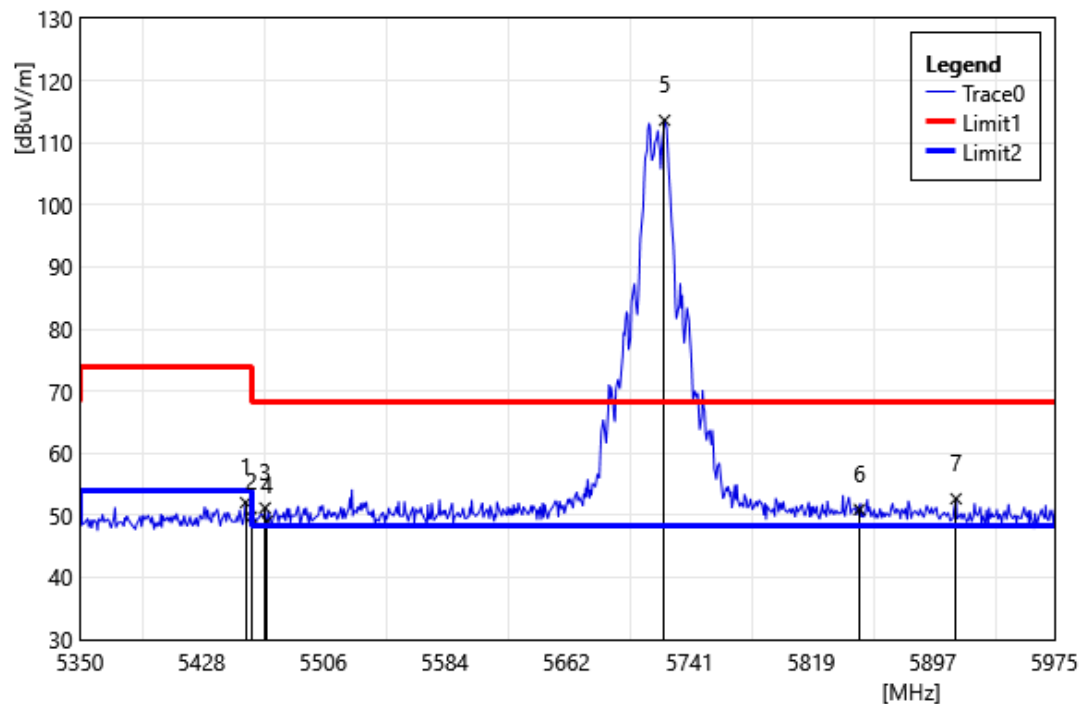


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.25	52.64	-0.58	52.06	74.00	-21.94	PEAK
2	5460.00	50.30	-0.57	49.73	74.00	-24.27	PEAK
3	5468.75	51.75	-0.56	51.19	68.20	-17.01	PEAK
4	5470.00	49.60	-0.56	49.04	68.20	-19.16	PEAK
5	5725.00	113.96	-0.34	113.62	68.20	45.42	PEAK
6	5850.00	50.66	0.28	50.94	68.20	-17.26	PEAK
7	5911.88	52.31	0.35	52.66	68.20	-15.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

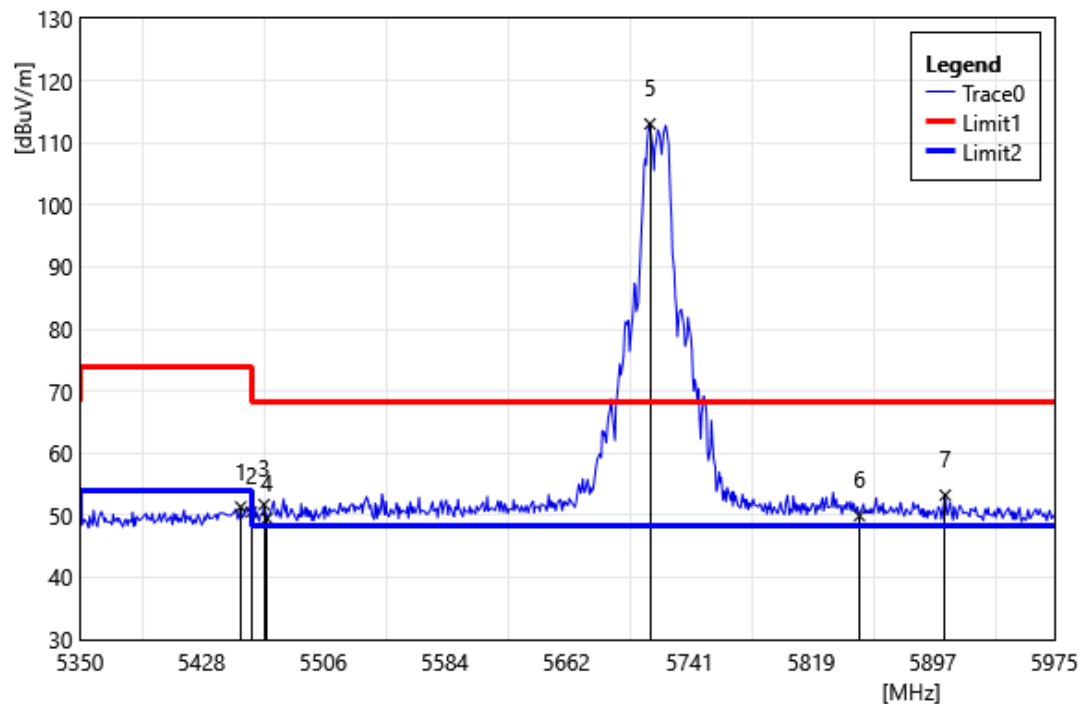


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.13	51.93	-0.58	51.35	74.00	-22.65	PEAK
2	5460.00	51.11	-0.57	50.54	74.00	-23.46	PEAK
3	5468.13	52.29	-0.56	51.73	68.20	-16.47	PEAK
4	5470.00	50.05	-0.56	49.49	68.20	-18.71	PEAK
5	5715.63	113.49	-0.44	113.05	68.20	44.85	PEAK
6	5850.00	49.65	0.28	49.93	68.20	-18.27	PEAK
7	5905.00	52.88	0.38	53.26	68.20	-14.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

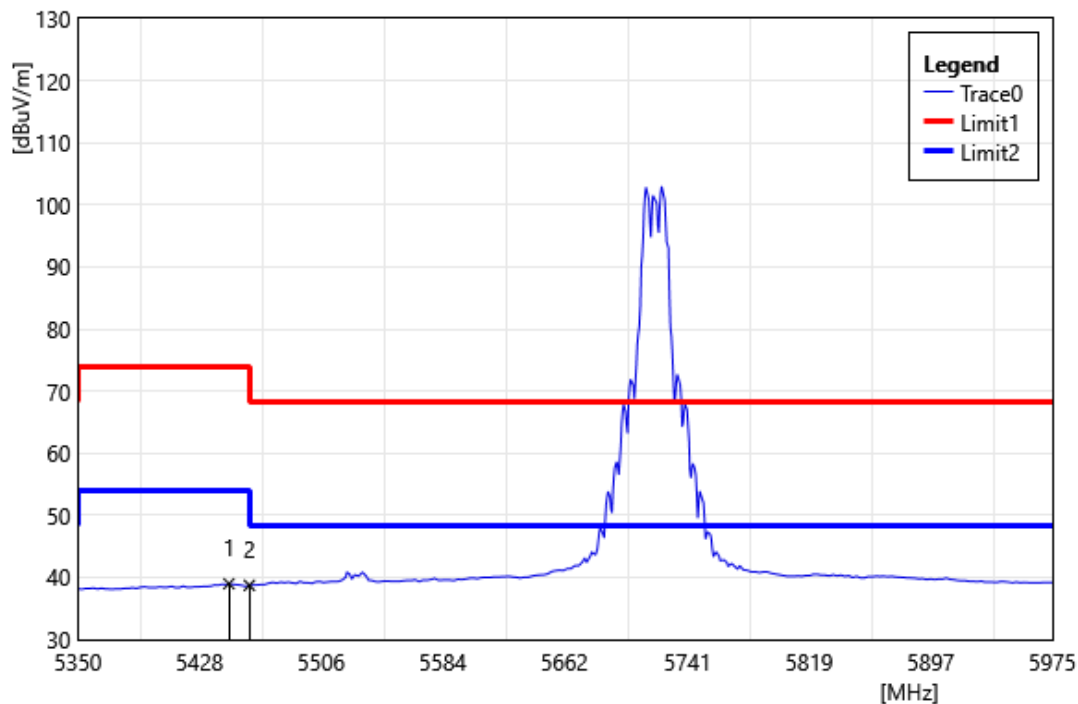


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5446.88	39.58	-0.61	38.97	54.00	-15.03	AVG
2	5460.00	39.30	-0.57	38.73	54.00	-15.27	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

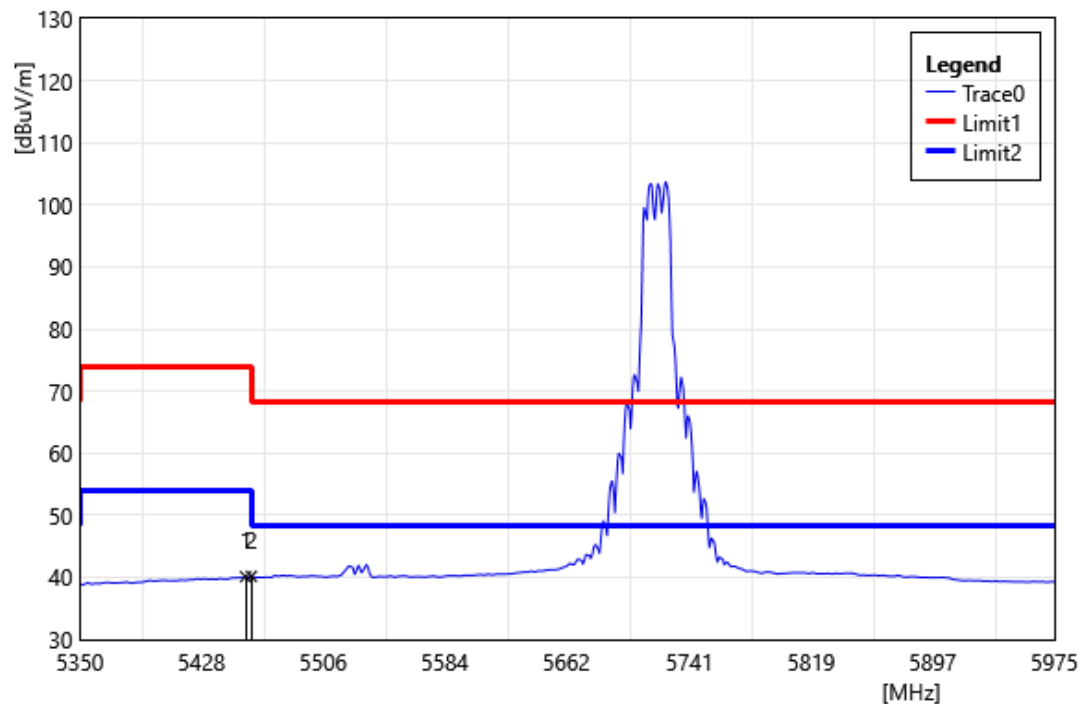


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.25	40.71	-0.58	40.13	54.00	-13.87	AVG
2	5460.00	40.75	-0.57	40.18	54.00	-13.82	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

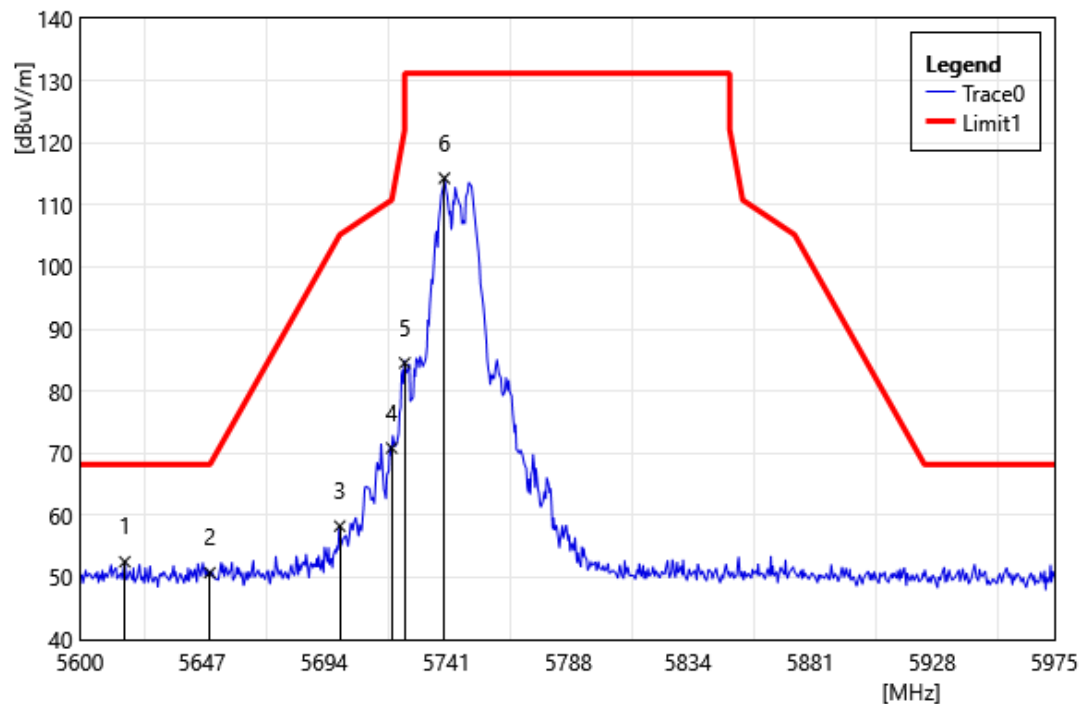


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5617.25	53.11	-0.59	52.52	68.20	-15.68	PEAK
2	5650.00	51.39	-0.64	50.75	68.20	-17.45	PEAK
3	5700.00	58.88	-0.61	58.27	105.20	-46.93	PEAK
4	5720.00	71.24	-0.40	70.84	110.80	-39.96	PEAK
5	5725.00	84.89	-0.34	84.55	122.20	-37.65	PEAK
6	5740.25	114.48	-0.18	114.30	131.20	-16.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

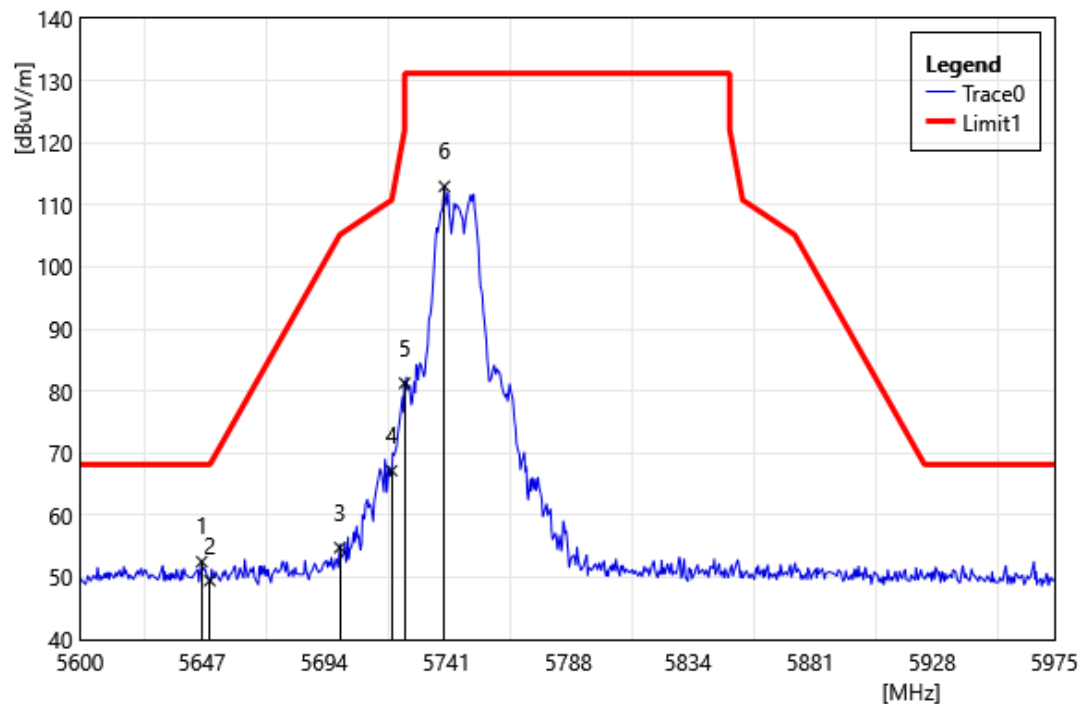


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5646.88	53.17	-0.64	52.53	68.20	-15.67	PEAK
2	5650.00	50.12	-0.64	49.48	68.20	-18.72	PEAK
3	5700.00	55.41	-0.61	54.80	105.20	-50.40	PEAK
4	5720.00	67.58	-0.40	67.18	110.80	-43.62	PEAK
5	5725.00	81.63	-0.34	81.29	122.20	-40.91	PEAK
6	5740.25	113.16	-0.18	112.98	131.20	-18.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5785 MHz		
Polarization:	Vertical		
Remark:			

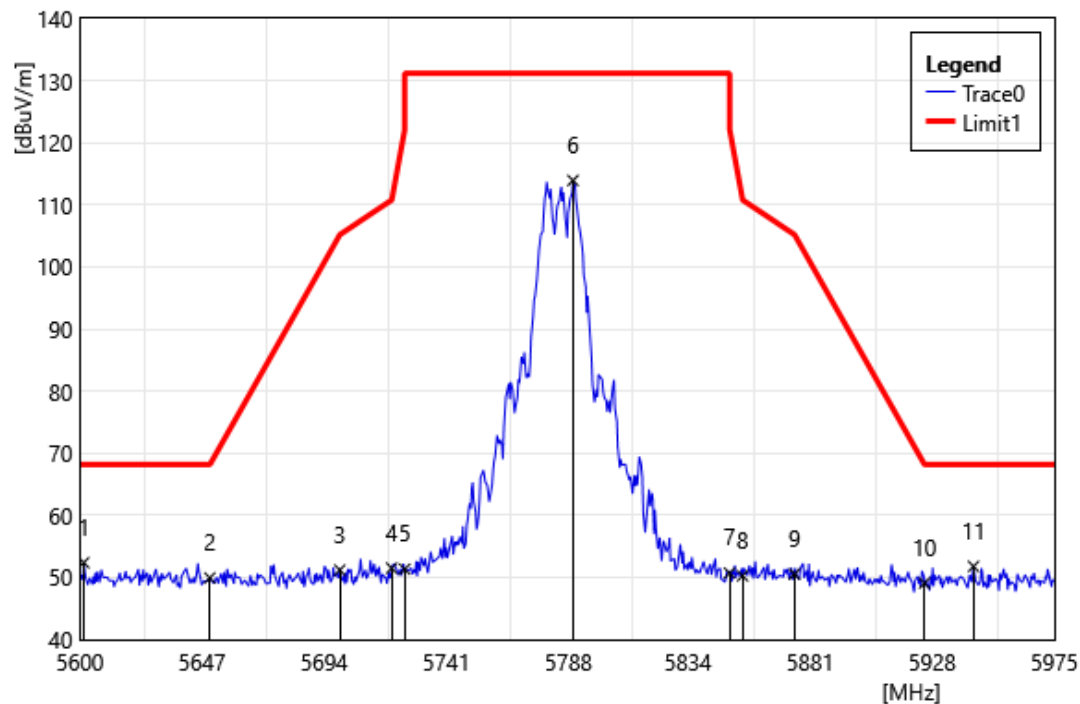


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5601.50	52.95	-0.57	52.38	68.20	-15.82	PEAK
2	5650.00	50.56	-0.64	49.92	68.20	-18.28	PEAK
3	5700.00	51.80	-0.61	51.19	105.20	-54.01	PEAK
4	5720.00	51.91	-0.40	51.51	110.80	-59.29	PEAK
5	5725.00	51.68	-0.34	51.34	122.20	-70.86	PEAK
6	5789.75	113.83	0.10	113.93	131.20	-17.27	PEAK
7	5850.00	50.43	0.28	50.71	122.20	-71.49	PEAK
8	5855.00	49.98	0.29	50.27	110.80	-60.53	PEAK
9	5875.00	50.21	0.34	50.55	105.20	-54.65	PEAK
10	5925.00	48.80	0.28	49.08	68.20	-19.12	PEAK
11	5943.88	51.62	0.17	51.79	68.20	-16.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5785 MHz		
Polarization:	Horizontal		
Remark:			

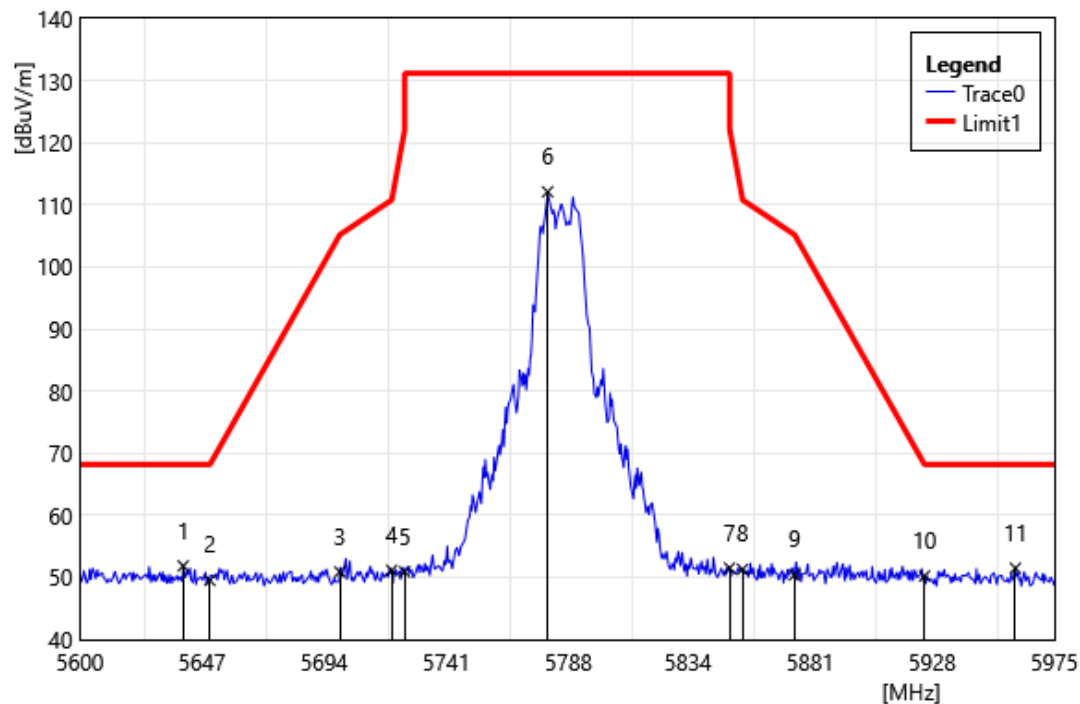


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5639.75	52.49	-0.63	51.86	68.20	-16.34	PEAK
2	5650.00	50.17	-0.64	49.53	68.20	-18.67	PEAK
3	5700.00	51.51	-0.61	50.90	105.20	-54.30	PEAK
4	5720.00	51.55	-0.40	51.15	110.80	-59.65	PEAK
5	5725.00	51.24	-0.34	50.90	122.20	-71.30	PEAK
6	5780.00	112.04	0.06	112.10	131.20	-19.10	PEAK
7	5850.00	51.23	0.28	51.51	122.20	-70.69	PEAK
8	5855.00	51.01	0.29	51.30	110.80	-59.50	PEAK
9	5875.00	50.07	0.34	50.41	105.20	-54.79	PEAK
10	5925.00	49.97	0.28	50.25	68.20	-17.95	PEAK
11	5960.00	51.32	0.17	51.49	68.20	-16.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

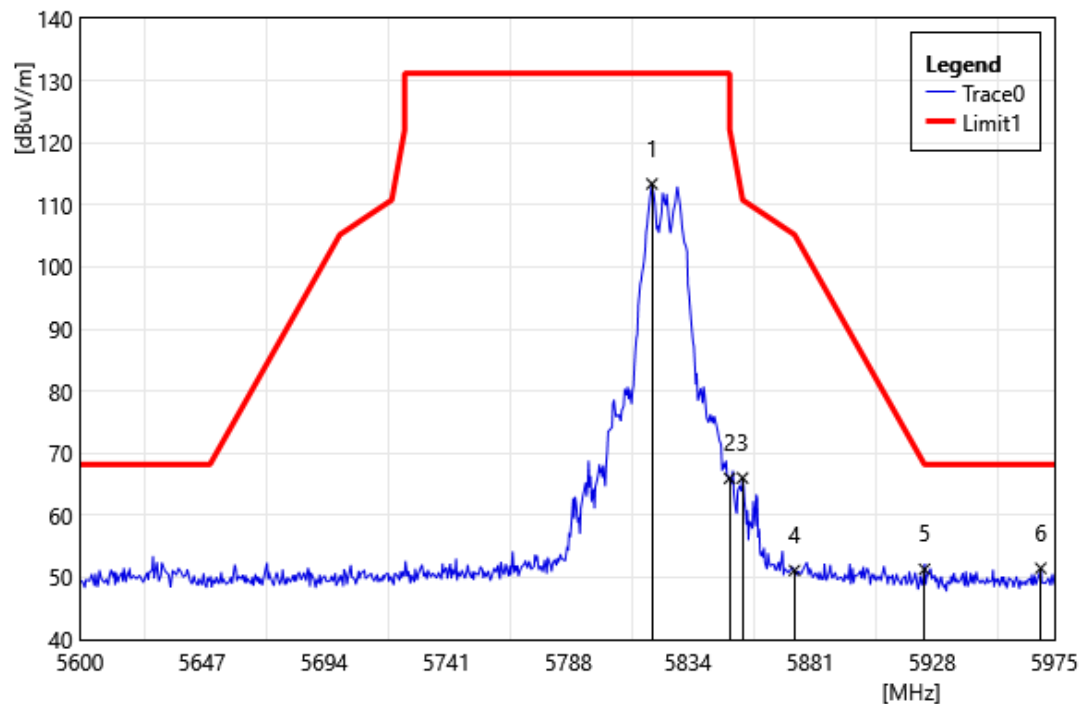


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5820.13	113.18	0.20	113.38	131.20	-17.82	PEAK
2	5850.00	65.68	0.28	65.96	122.20	-56.24	PEAK
3	5855.00	65.73	0.29	66.02	110.80	-44.78	PEAK
4	5875.00	50.78	0.34	51.12	105.20	-54.08	PEAK
5	5925.00	51.03	0.28	51.31	68.20	-16.89	PEAK
6	5969.75	51.29	0.19	51.48	68.20	-16.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

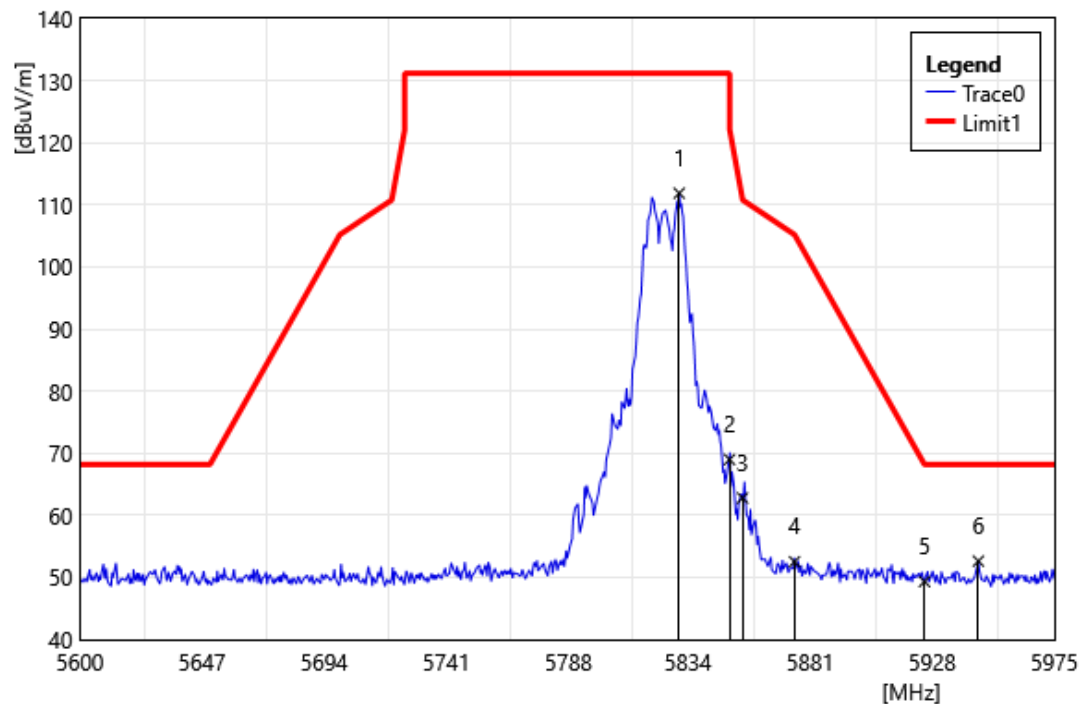


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5830.63	111.66	0.23	111.89	131.20	-19.31	PEAK
2	5850.00	68.71	0.28	68.99	122.20	-53.21	PEAK
3	5855.00	62.51	0.29	62.80	110.80	-48.00	PEAK
4	5875.00	52.20	0.34	52.54	105.20	-52.66	PEAK
5	5925.00	49.06	0.28	49.34	68.20	-18.86	PEAK
6	5945.75	52.48	0.16	52.64	68.20	-15.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Vertical		
Remark:			

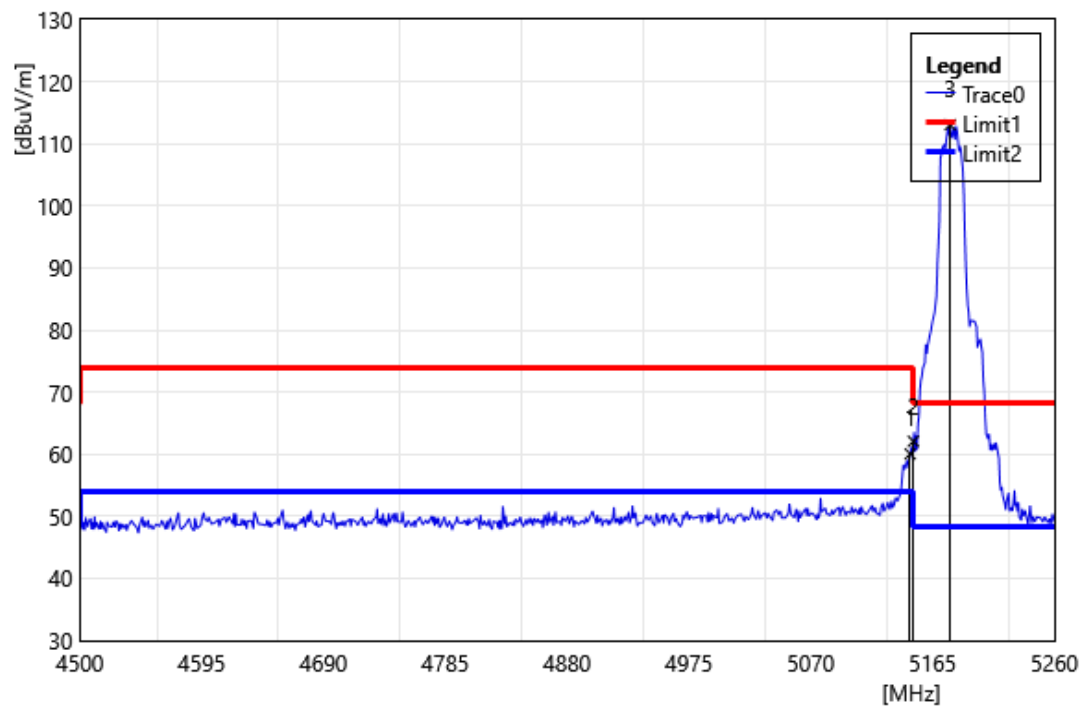


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	60.95	-0.91	60.04	74.00	-13.96	PEAK
2	5150.00	62.99	-0.91	62.08	74.00	-11.92	PEAK
3	5178.68	114.11	-1.05	113.06	68.20	44.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

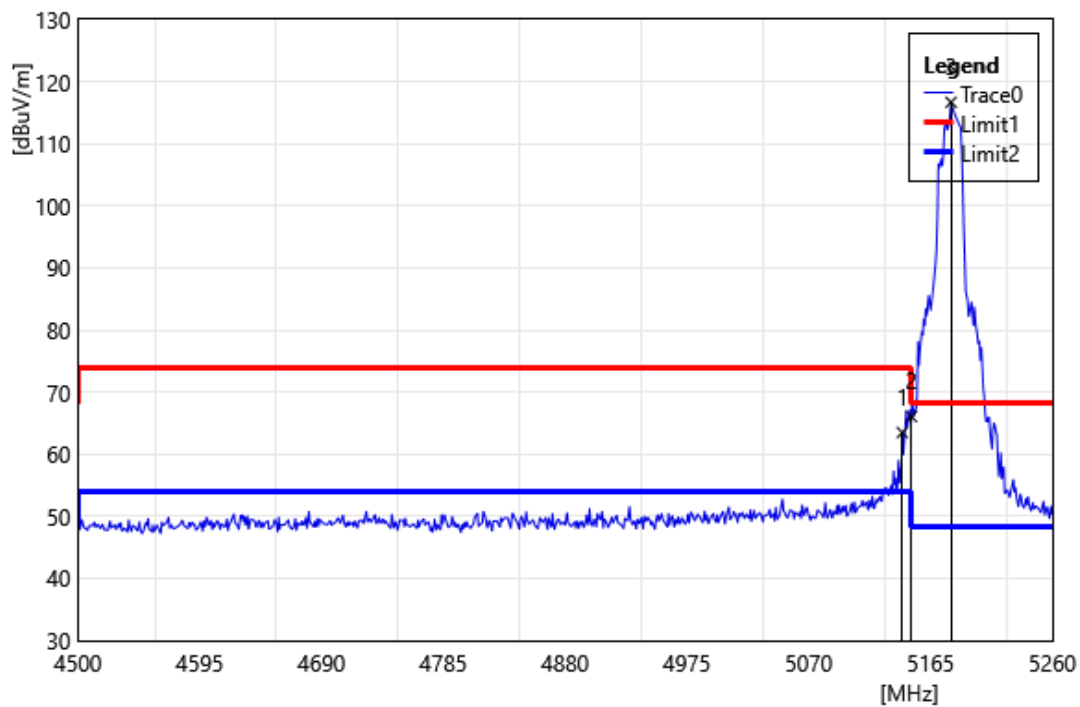


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	64.41	-0.90	63.51	74.00	-10.49	PEAK
2	5150.00	66.99	-0.91	66.09	74.00	-7.91	PEAK
3	5180.96	117.75	-1.06	116.69	68.20	48.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Vertical		
Remark:			

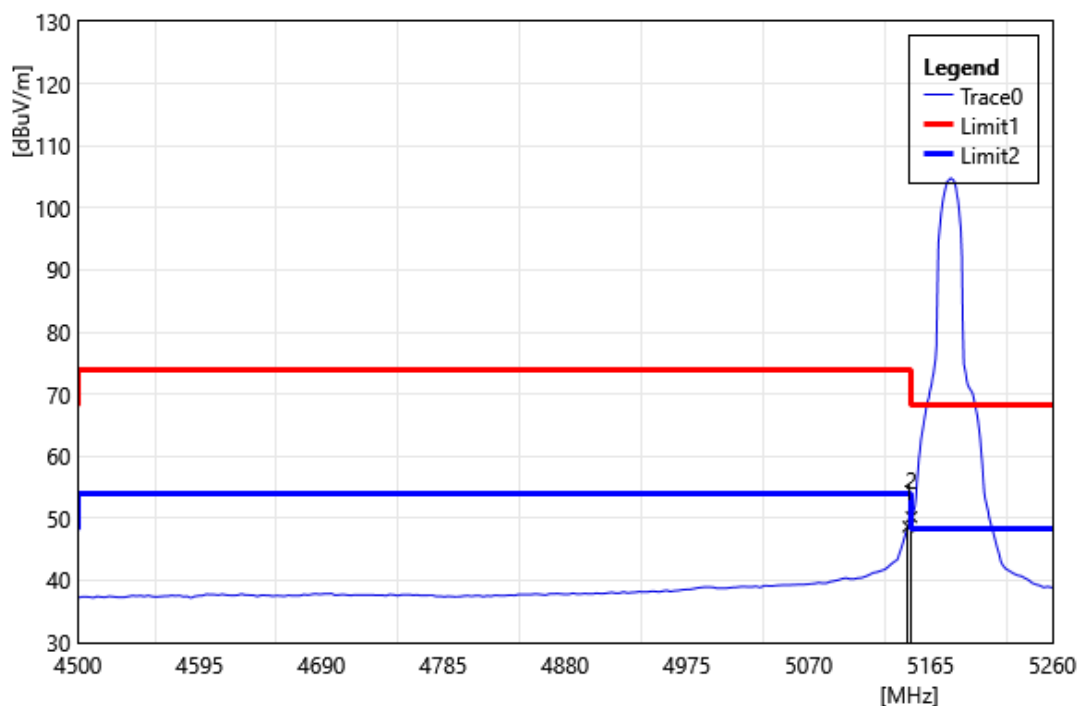


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	49.57	-0.91	48.66	54.00	-5.34	AVG
2	5150.00	51.13	-0.91	50.22	54.00	-3.78	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

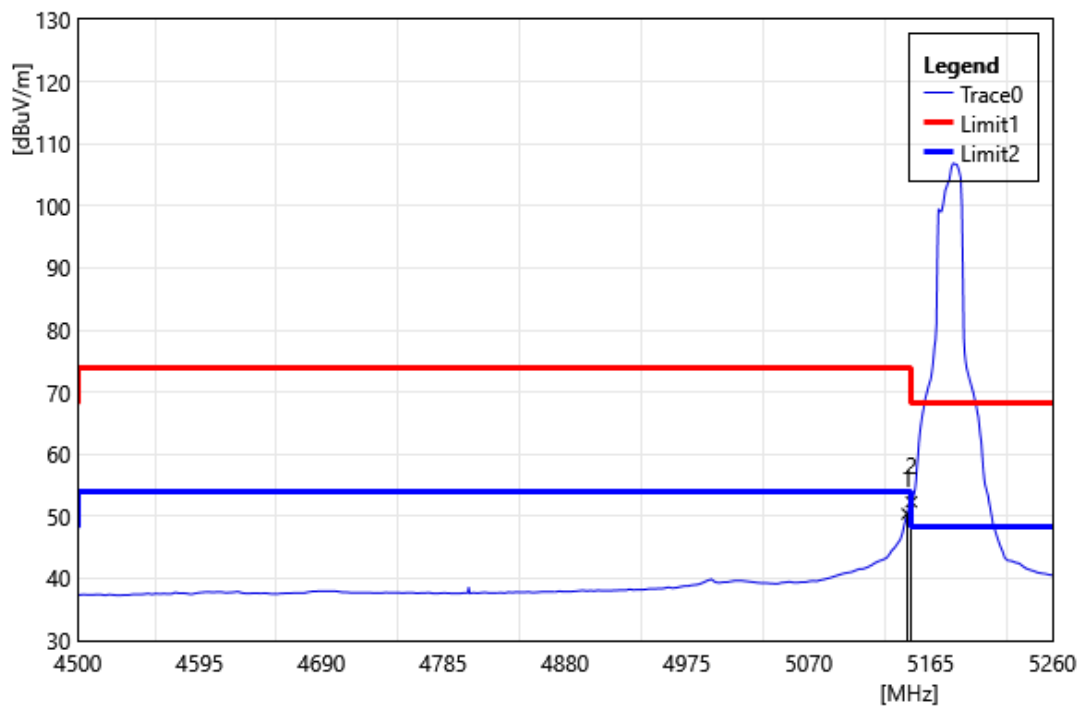


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	51.31	-0.90	50.41	54.00	-3.59	AVG
2	5150.00	53.23	-0.91	52.32	54.00	-1.68	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

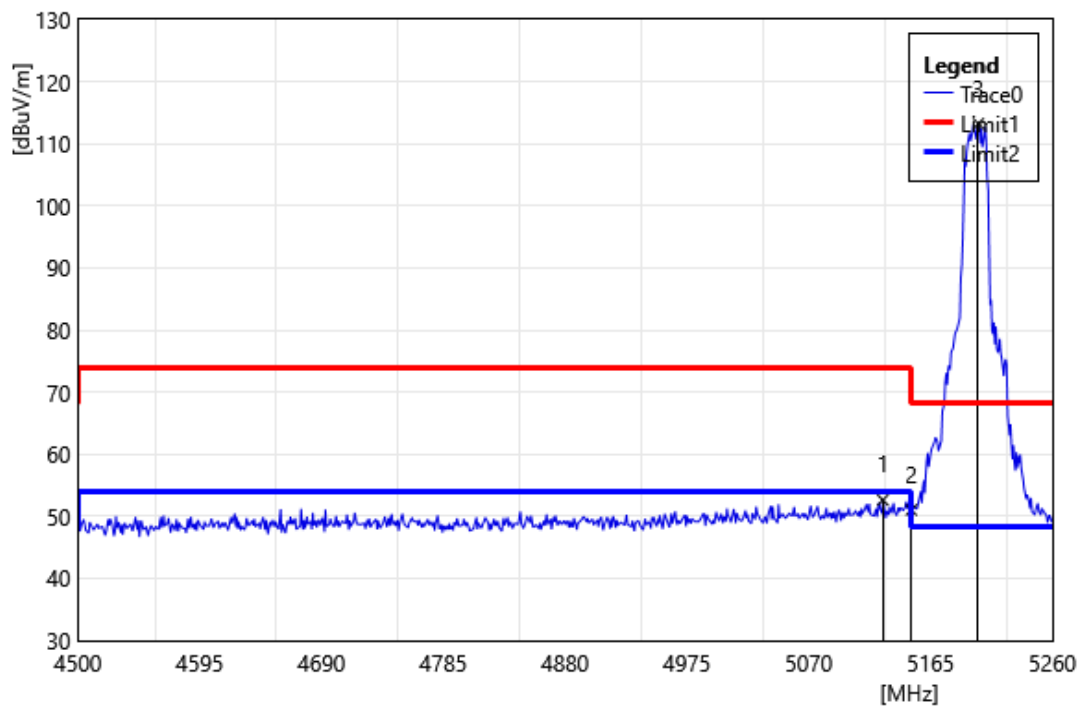


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5127.76	53.52	-0.89	52.63	74.00	-21.37	PEAK
2	5150.00	51.93	-0.91	51.02	74.00	-22.98	PEAK
3	5202.24	114.41	-1.17	113.24	68.20	45.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

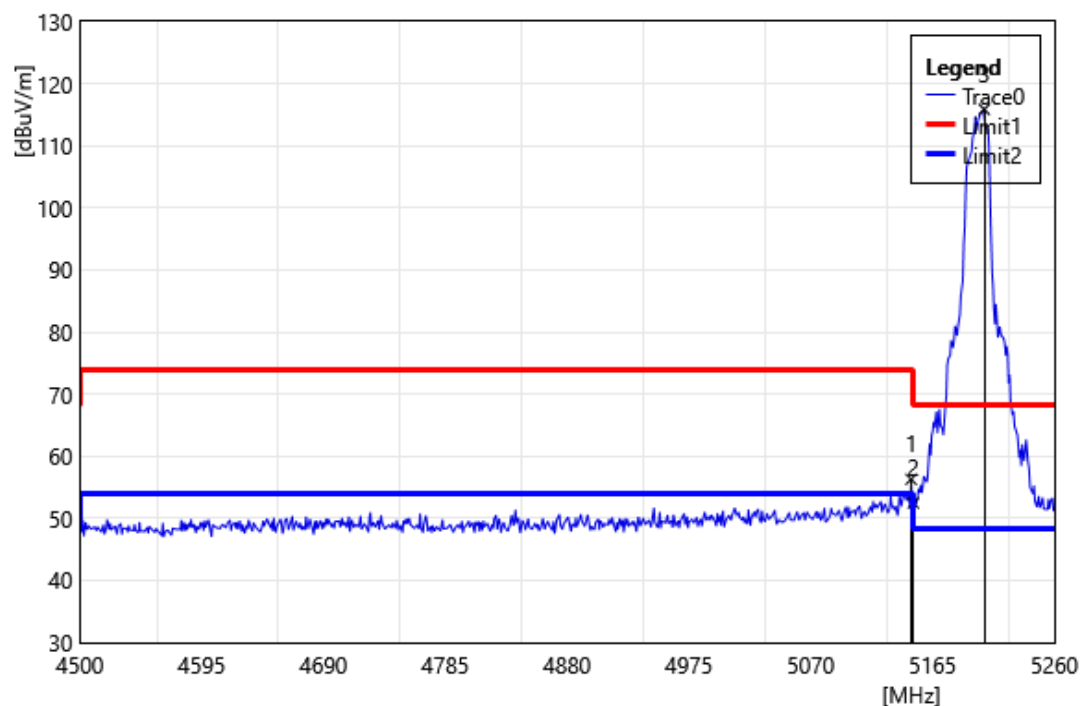


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	57.21	-0.91	56.30	74.00	-17.70	PEAK
2	5150.00	53.39	-0.91	52.48	74.00	-21.52	PEAK
3	5205.28	117.05	-1.19	115.86	68.20	47.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

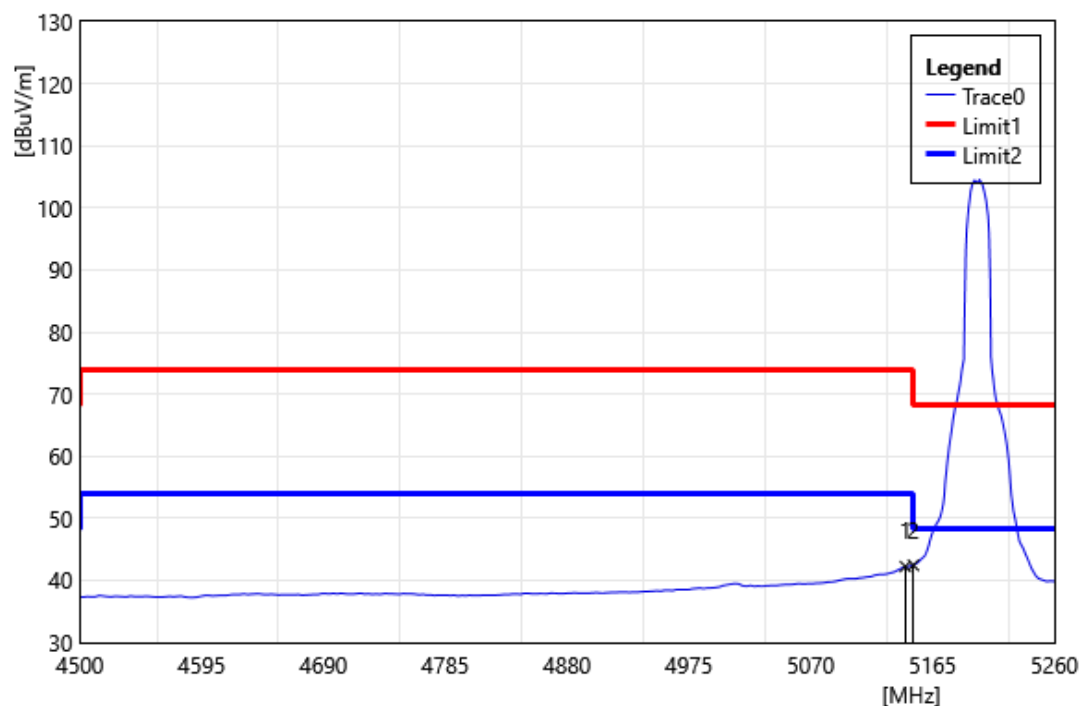


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	43.14	-0.90	42.24	54.00	-11.77	AVG
2	5150.00	43.36	-0.91	42.46	54.00	-11.54	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

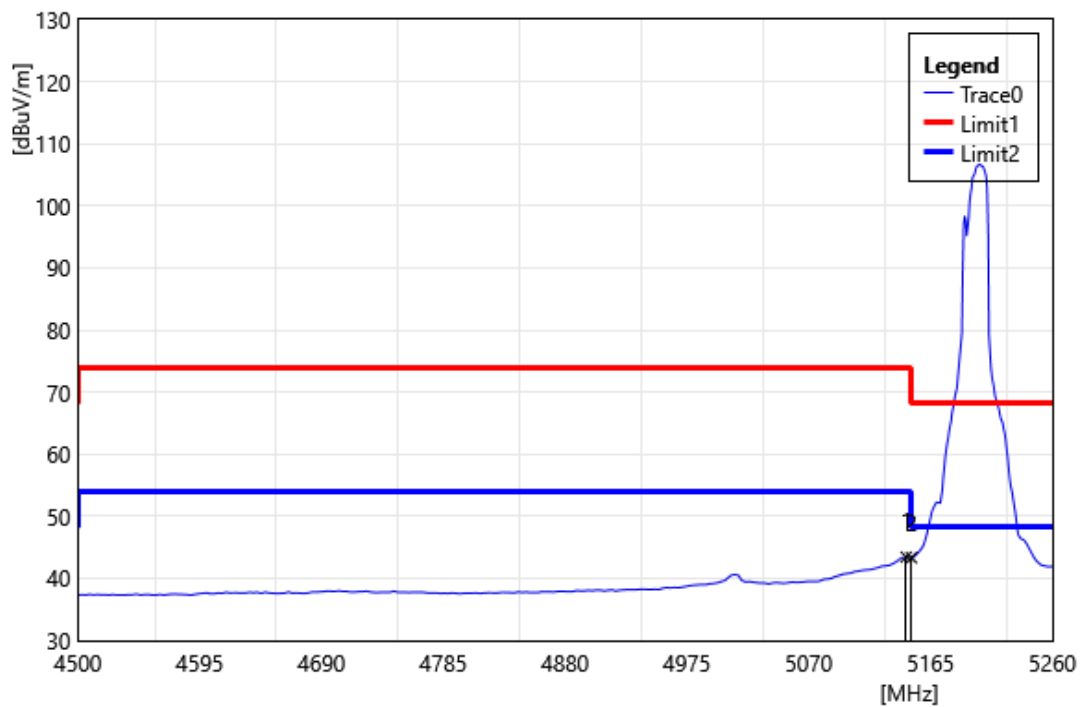


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	44.34	-0.90	43.44	54.00	-10.56	AVG
2	5150.00	44.25	-0.91	43.34	54.00	-10.66	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

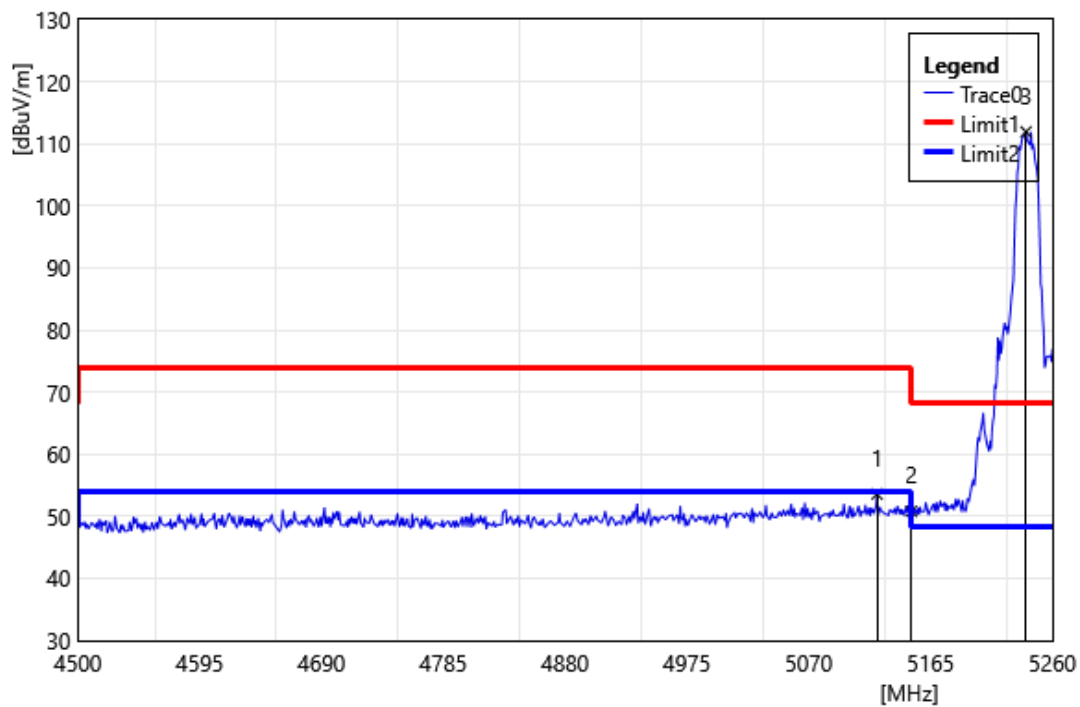


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5123.20	54.47	-0.88	53.59	74.00	-20.41	PEAK
2	5150.00	51.72	-0.91	50.82	74.00	-23.18	PEAK
3	5239.48	113.36	-1.43	111.93	68.20	43.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

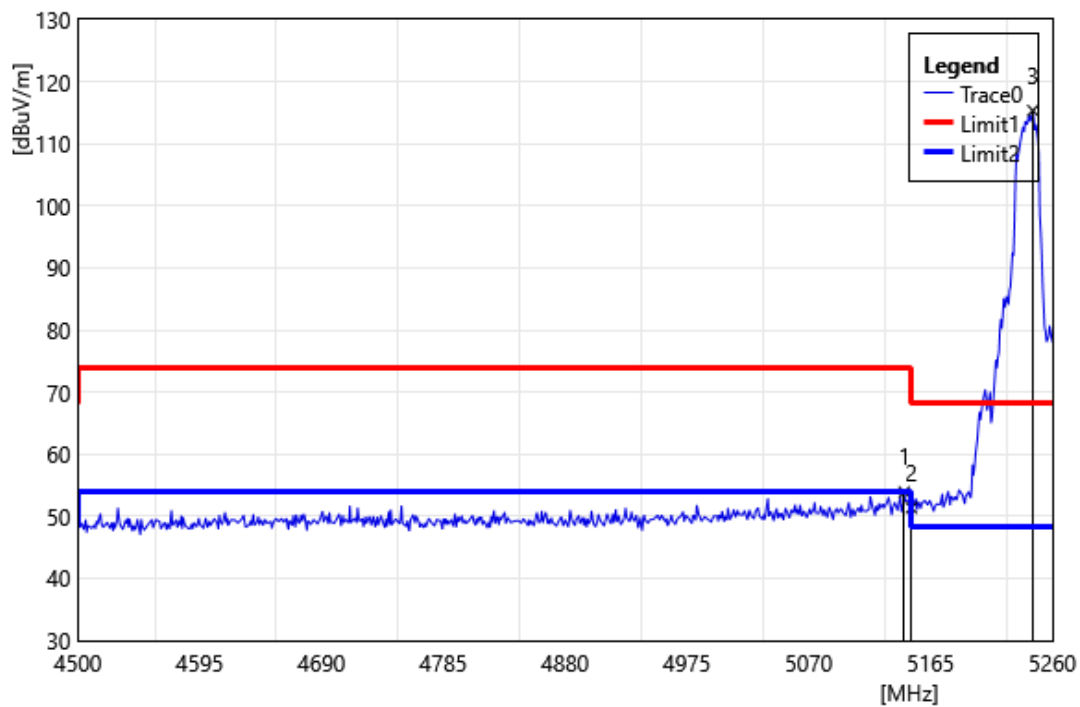


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	54.83	-0.90	53.93	74.00	-20.07	PEAK
2	5150.00	52.28	-0.91	51.37	74.00	-22.63	PEAK
3	5244.80	116.80	-1.46	115.35	68.20	47.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

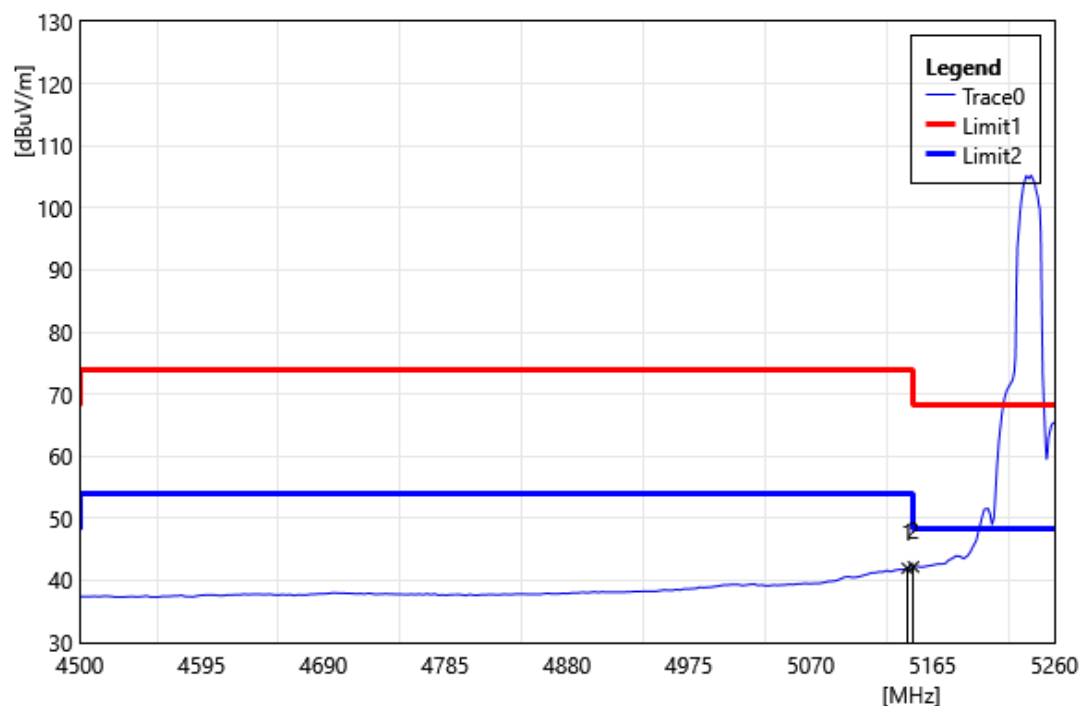


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	42.87	-0.90	41.97	54.00	-12.03	AVG
2	5150.00	43.09	-0.91	42.18	54.00	-11.82	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240 MHz		
Polarization:	Horizontal		
Remark:			

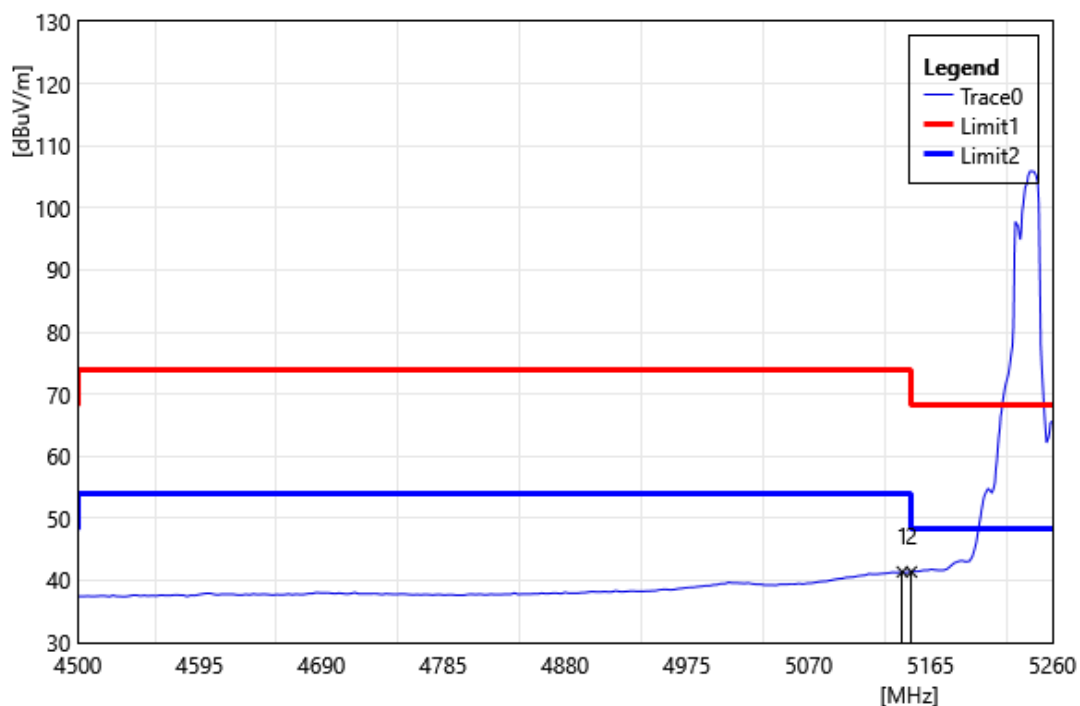


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	42.28	-0.90	41.38	54.00	-12.62	AVG
2	5150.00	42.29	-0.91	41.38	54.00	-12.62	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

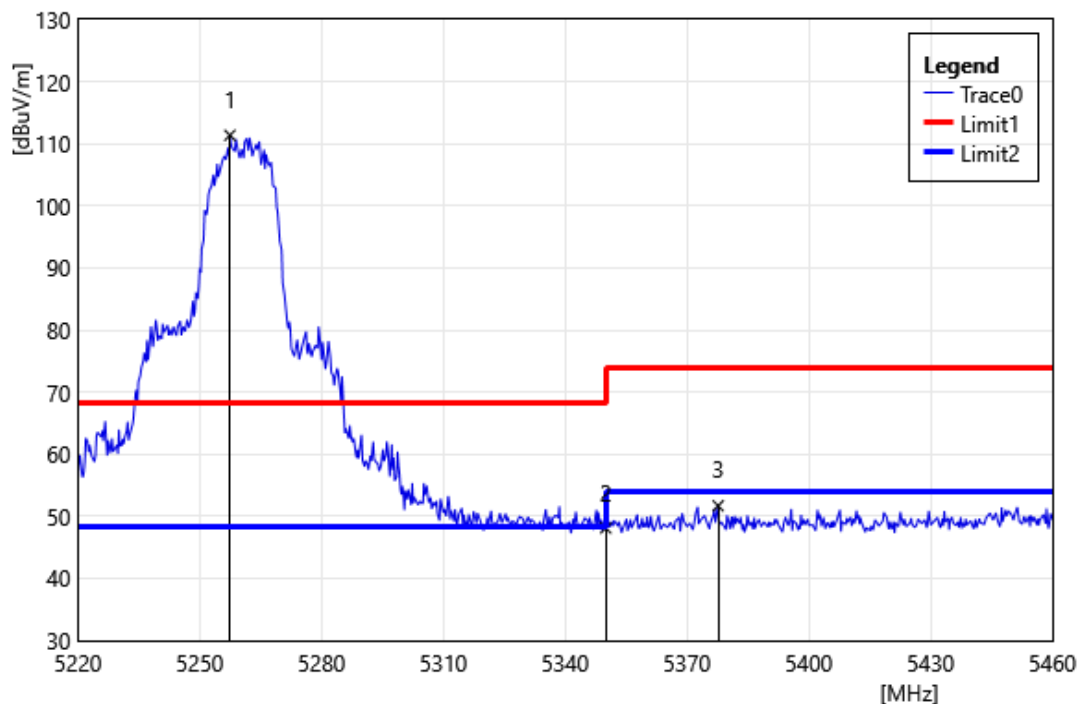


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5257.44	112.89	-1.52	111.37	68.20	43.17	PEAK
2	5350.00	49.41	-1.29	48.12	74.00	-25.88	PEAK
3	5377.68	52.80	-1.10	51.70	74.00	-22.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

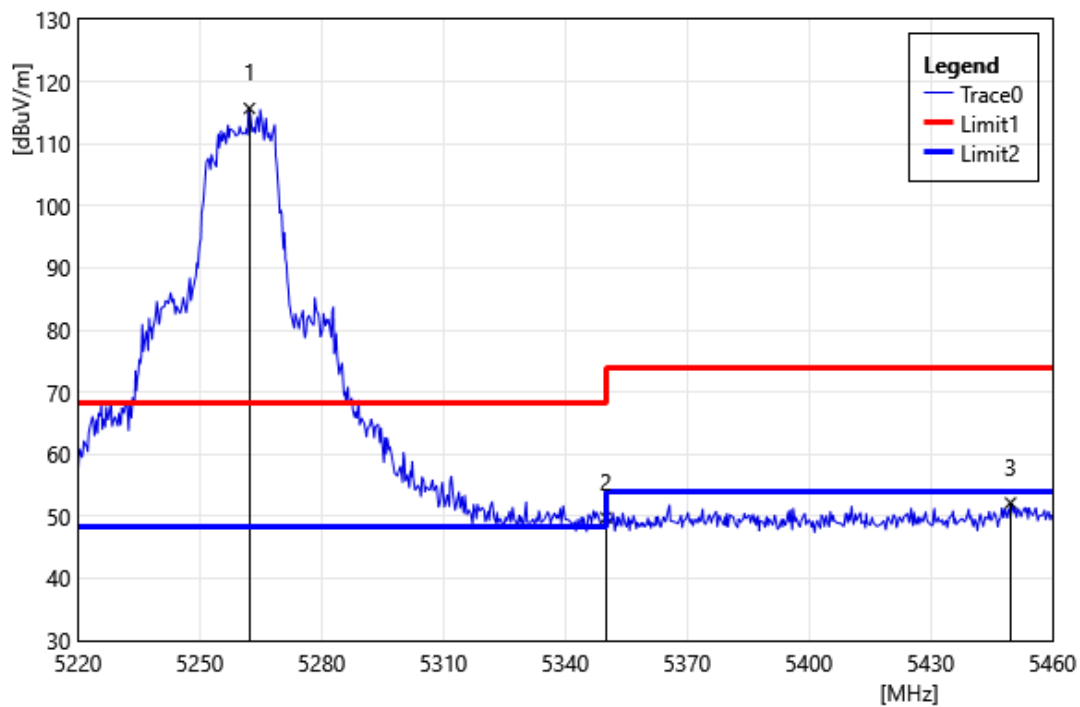


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5262.24	117.25	-1.54	115.71	68.20	47.51	PEAK
2	5350.00	51.07	-1.29	49.78	74.00	-24.22	PEAK
3	5449.68	52.75	-0.59	52.16	74.00	-21.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

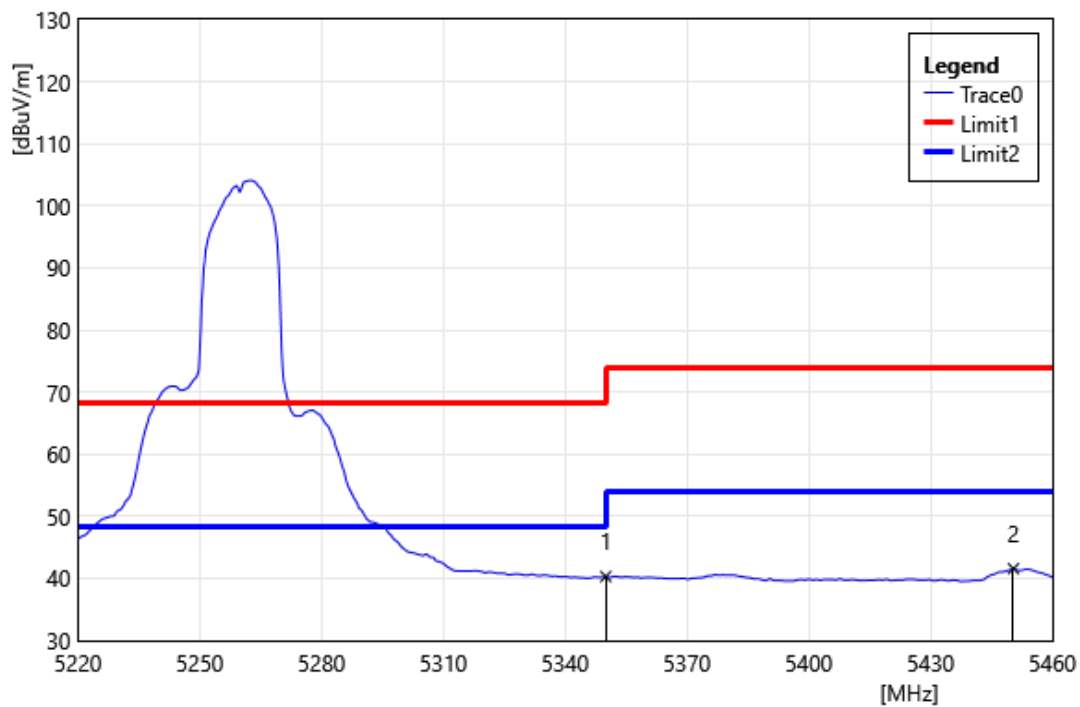


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.60	-1.29	40.31	54.00	-13.69	AVG
2	5450.40	42.15	-0.58	41.57	54.00	-12.43	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

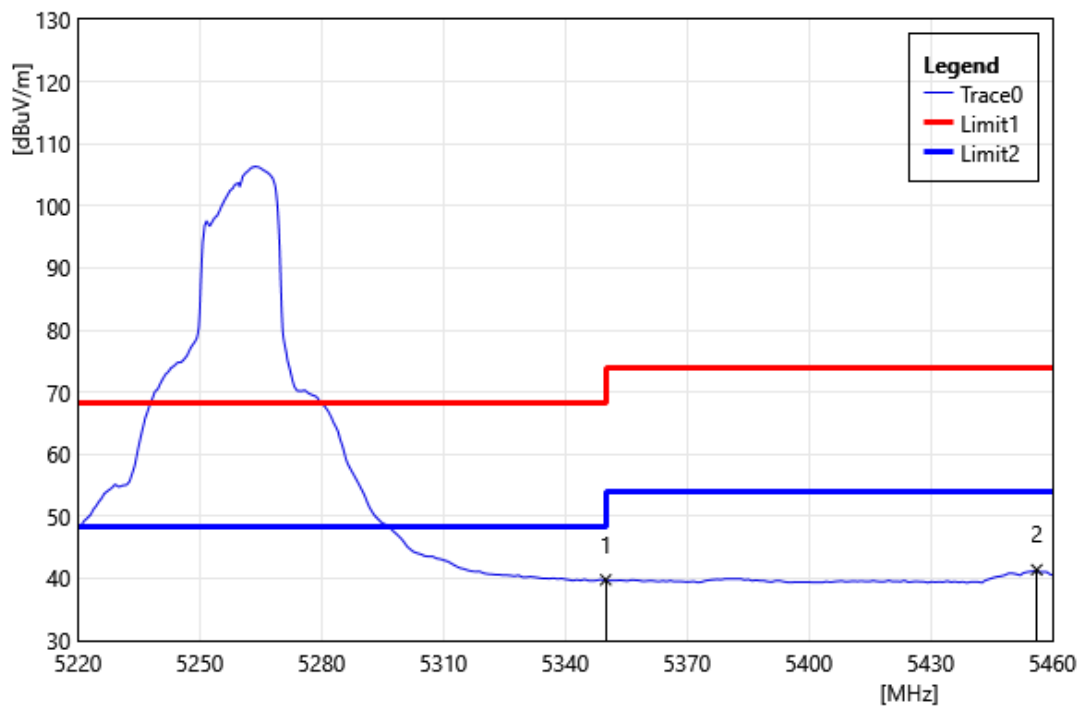


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.07	-1.29	39.78	54.00	-14.22	AVG
2	5456.16	41.97	-0.58	41.39	54.00	-12.61	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

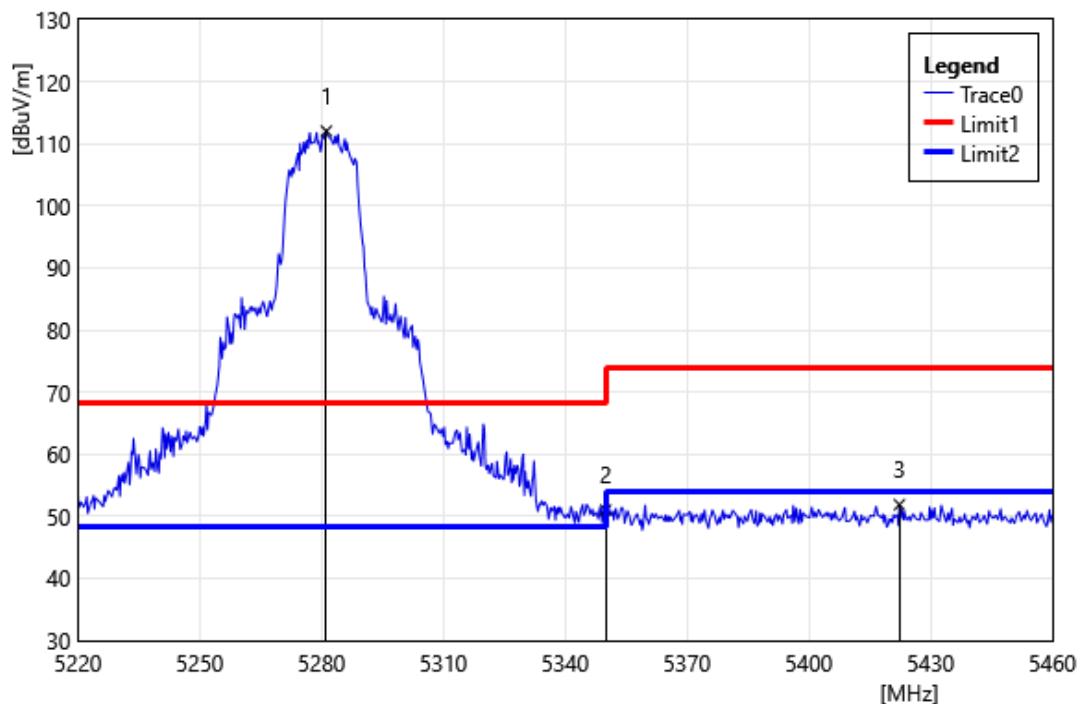


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5281.20	113.62	-1.59	112.04	68.20	43.84	PEAK
2	5350.00	52.30	-1.29	51.01	74.00	-22.99	PEAK
3	5422.32	52.67	-0.78	51.89	74.00	-22.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

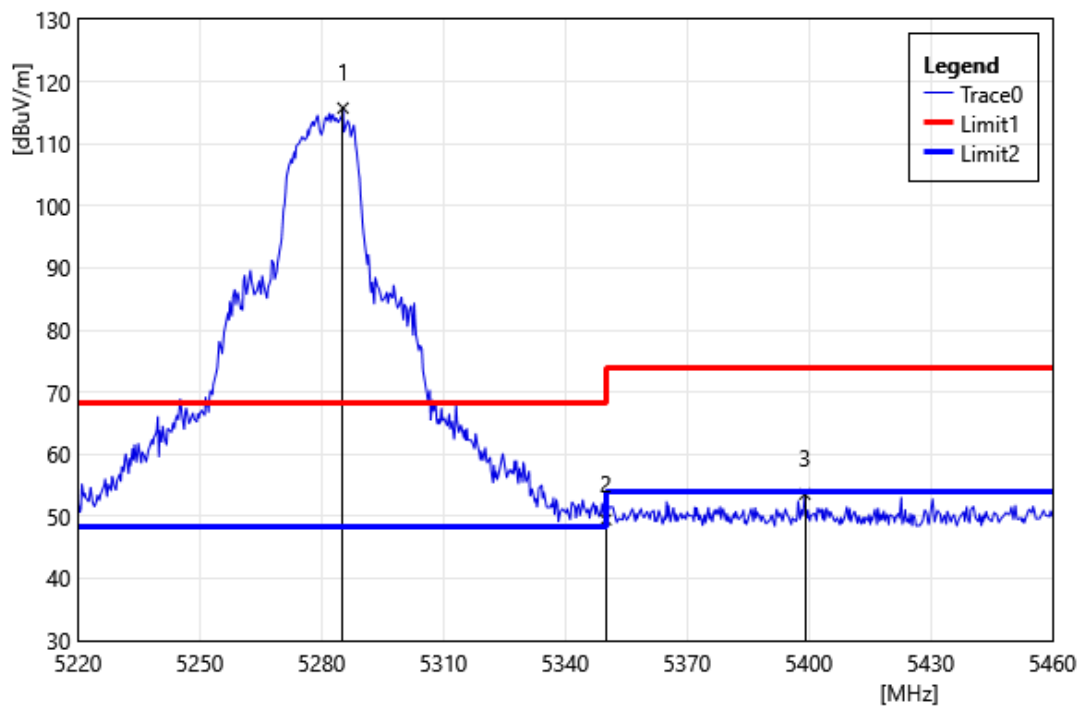


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5285.28	117.36	-1.60	115.76	68.20	47.56	PEAK
2	5350.00	50.74	-1.29	49.44	74.00	-24.56	PEAK
3	5399.04	54.52	-0.94	53.58	74.00	-20.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

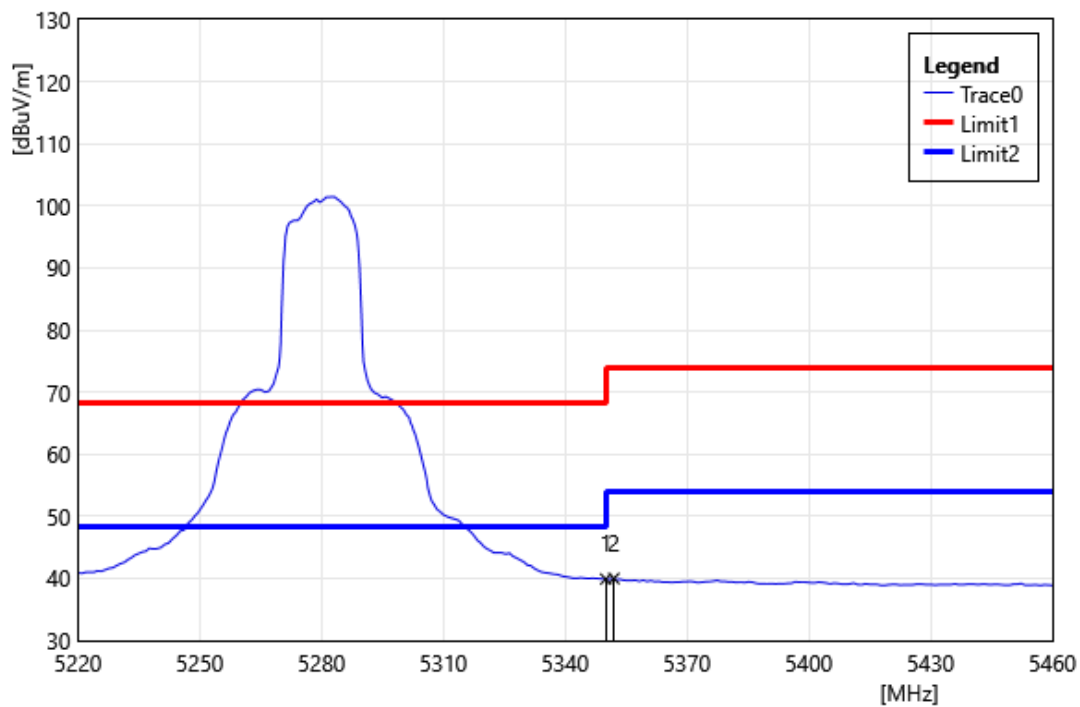


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.20	-1.29	39.90	54.00	-14.10	AVG
2	5352.00	41.27	-1.28	39.99	54.00	-14.01	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

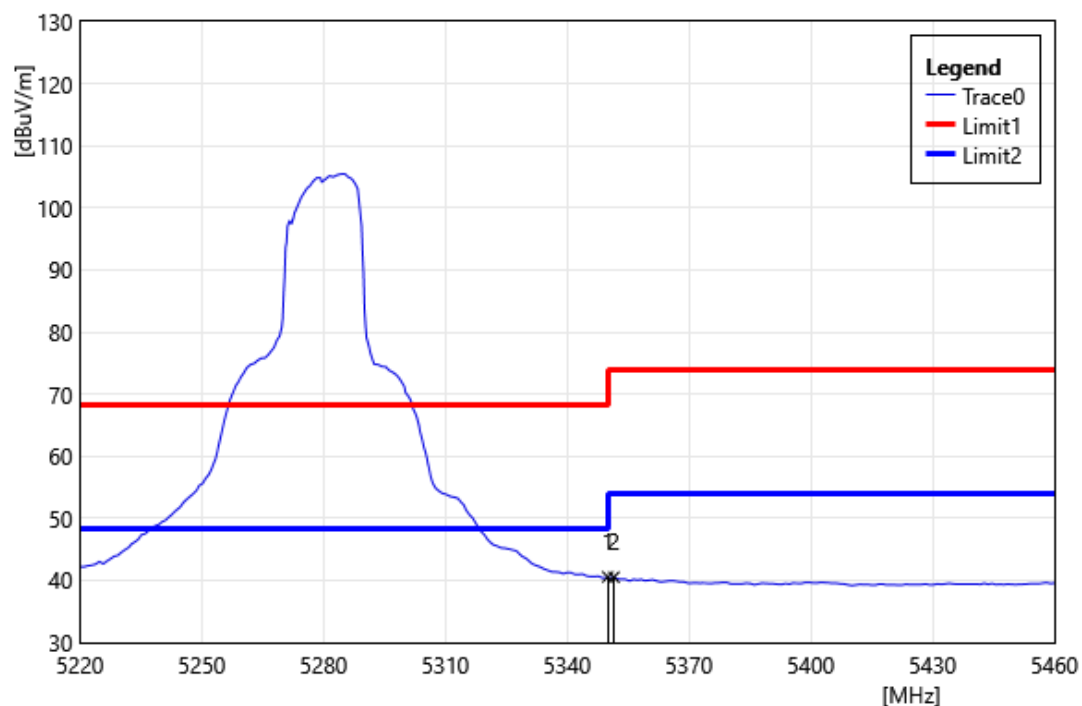


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.86	-1.29	40.57	54.00	-13.43	AVG
2	5351.52	41.81	-1.28	40.53	54.00	-13.47	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Vertical		
Remark:			

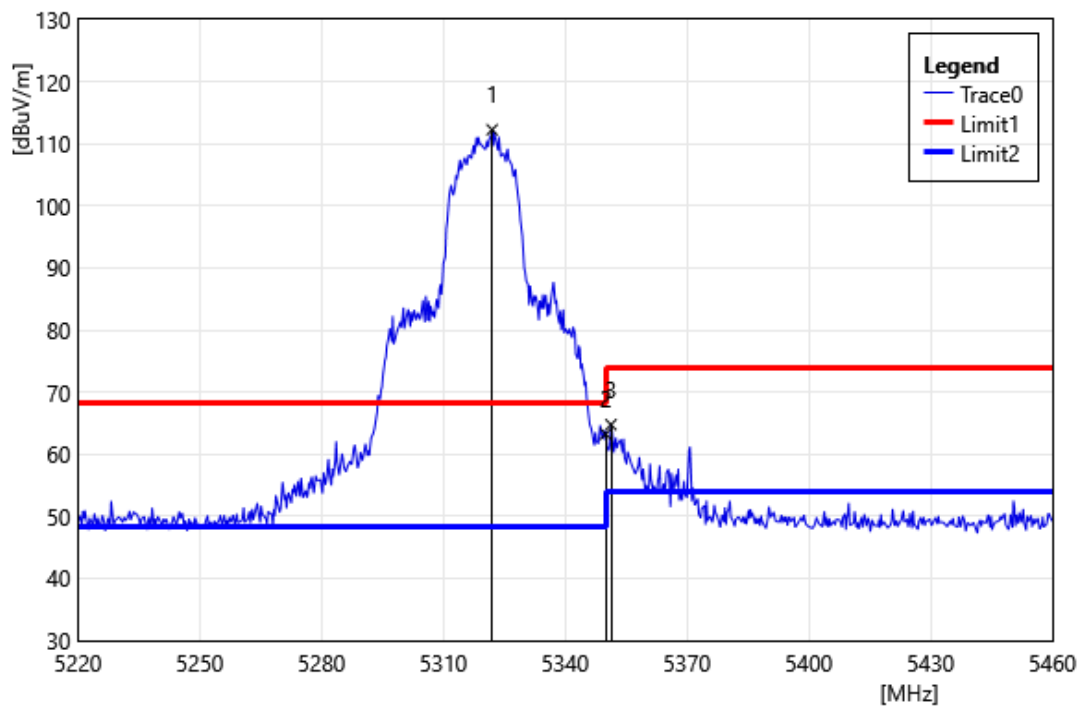


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5322.00	113.76	-1.49	112.27	68.20	44.07	PEAK
2	5350.00	64.54	-1.29	63.25	74.00	-10.75	PEAK
3	5351.28	66.05	-1.28	64.77	74.00	-9.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

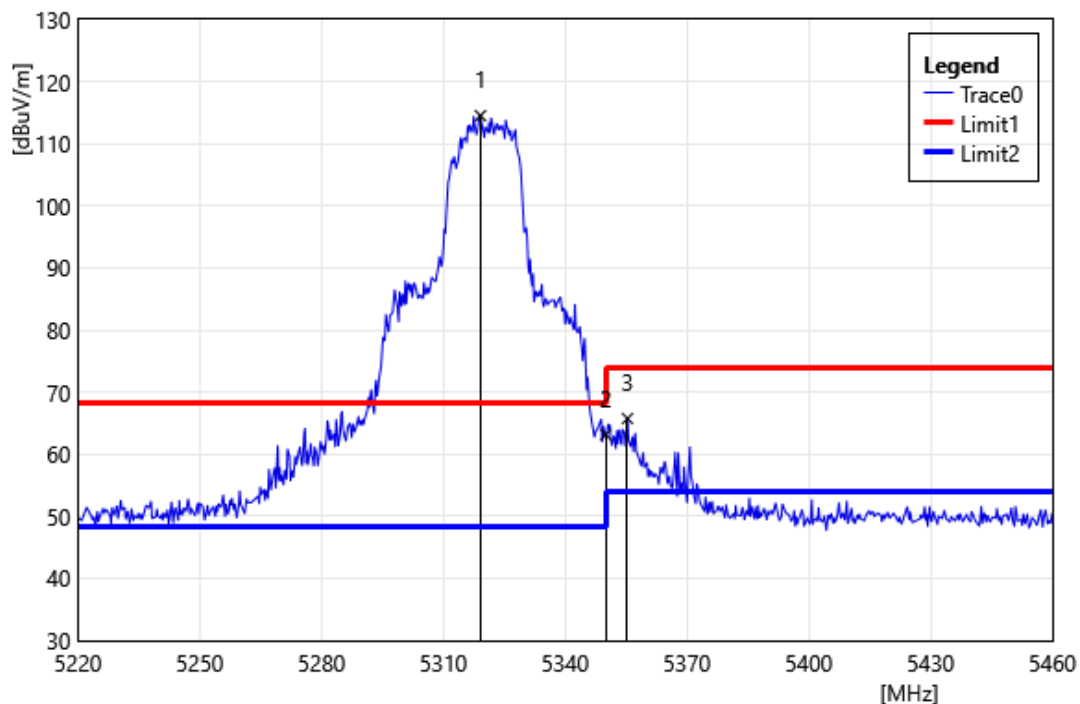


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5319.12	116.03	-1.51	114.52	68.20	46.32	PEAK
2	5350.00	64.46	-1.29	63.17	74.00	-10.83	PEAK
3	5355.36	67.01	-1.25	65.76	74.00	-8.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Vertical		
Remark:			

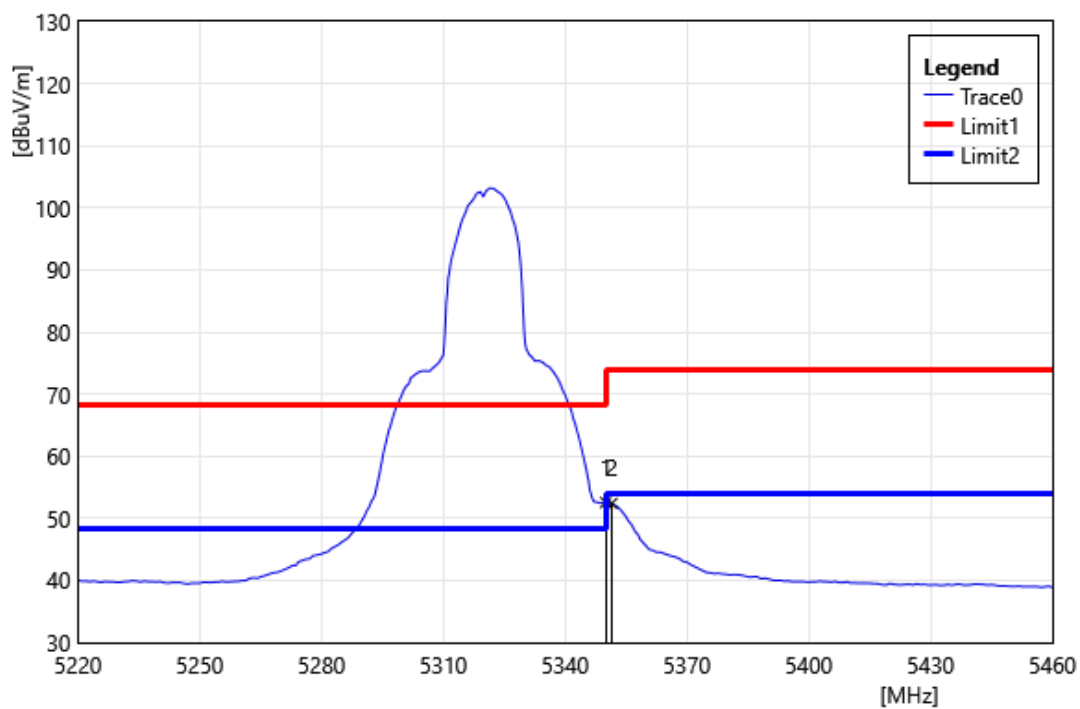


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.84	-1.29	52.55	54.00	-1.45	AVG
2	5351.52	53.69	-1.28	52.41	54.00	-1.59	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

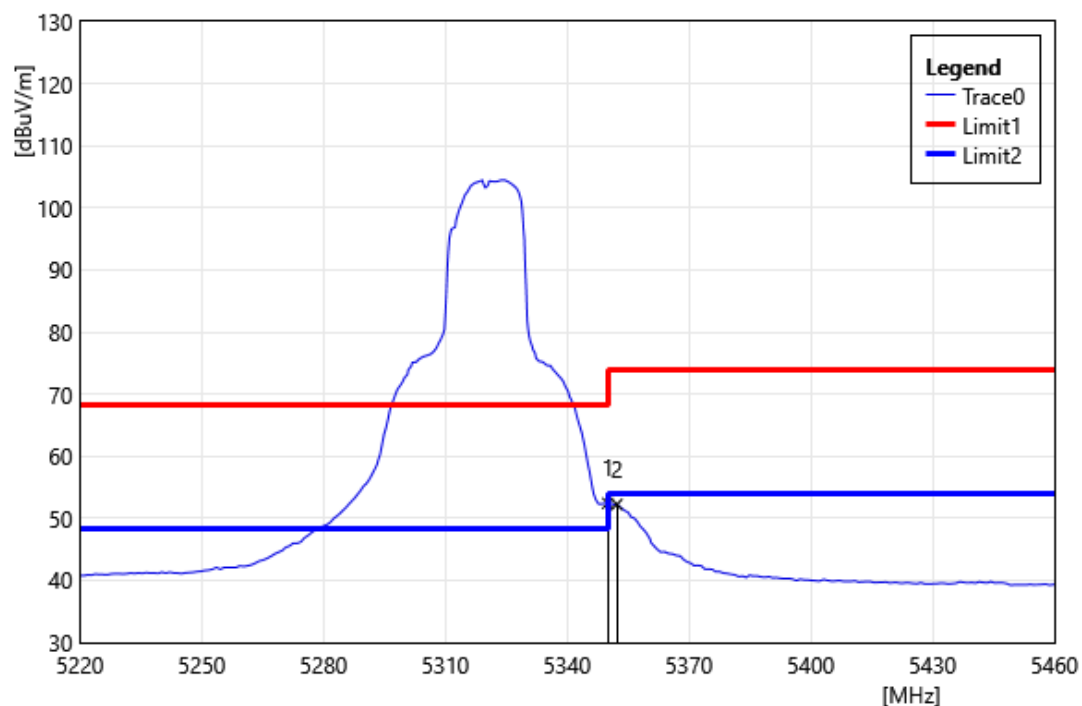


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.72	-1.29	52.43	54.00	-1.57	AVG
2	5352.24	53.52	-1.28	52.24	54.00	-1.76	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

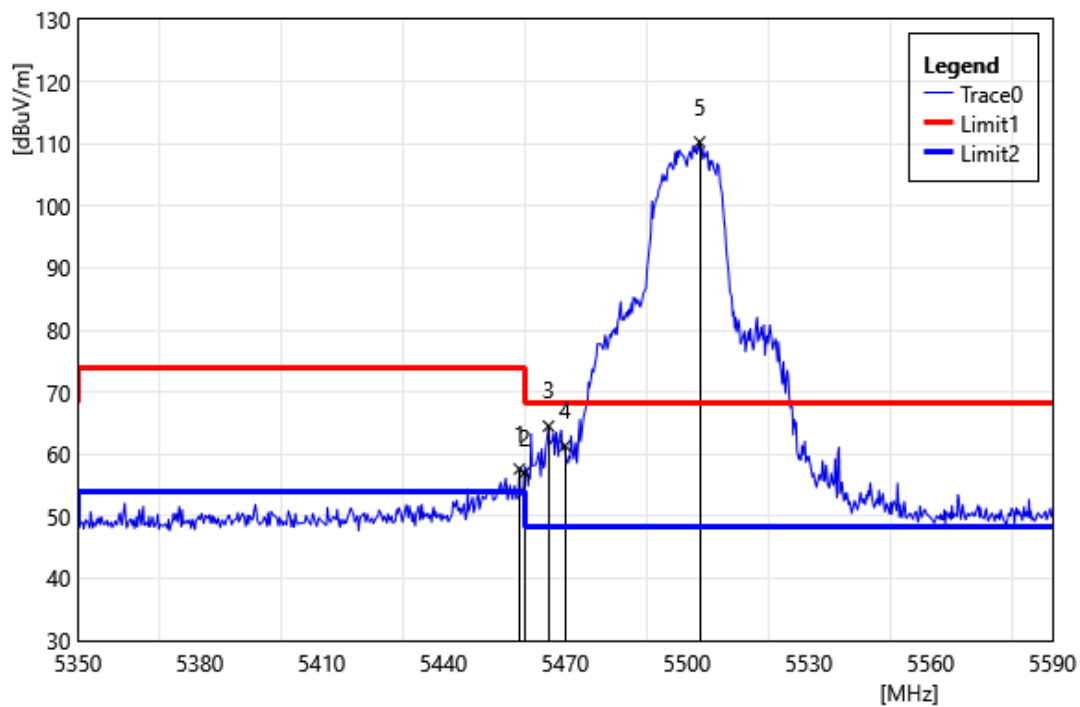


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	58.20	-0.57	57.63	74.00	-16.37	PEAK
2	5460.00	57.58	-0.57	57.01	74.00	-16.99	PEAK
3	5465.92	65.10	-0.57	64.53	68.20	-3.67	PEAK
4	5470.00	61.93	-0.56	61.37	68.20	-6.83	PEAK
5	5503.12	110.81	-0.53	110.28	68.20	42.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

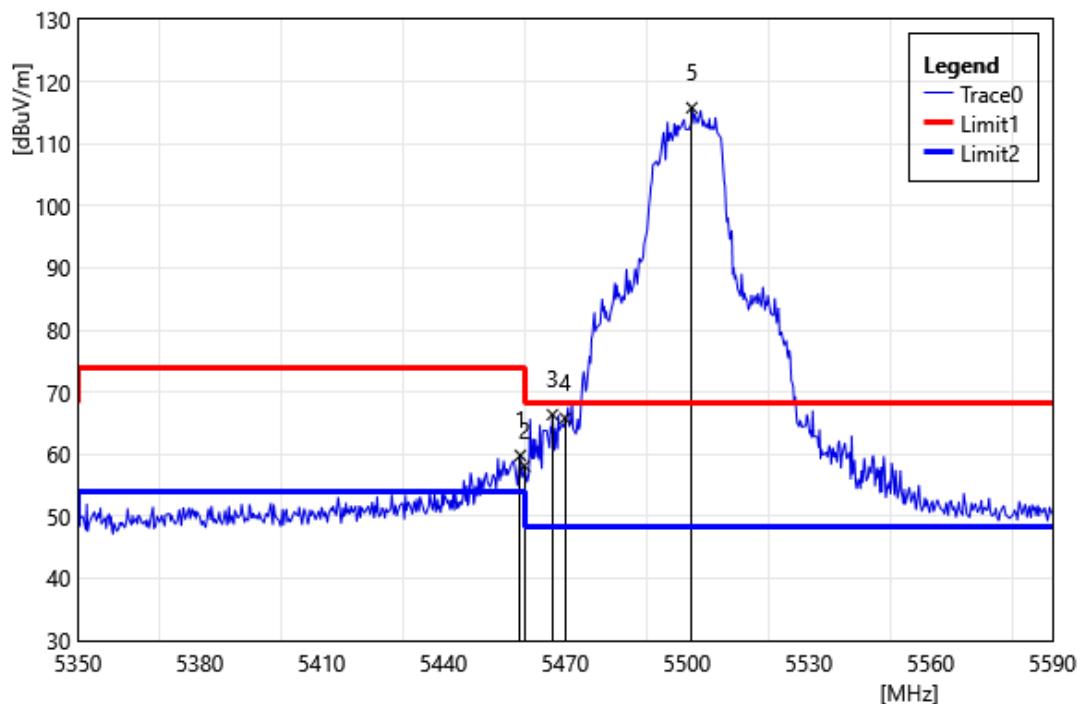


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	60.38	-0.57	59.81	74.00	-14.19	PEAK
2	5460.00	58.68	-0.57	58.11	74.00	-15.89	PEAK
3	5466.88	66.95	-0.57	66.38	68.20	-1.82	PEAK
4	5470.00	66.35	-0.56	65.79	68.20	-2.41	PEAK
5	5501.20	116.33	-0.53	115.80	68.20	47.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

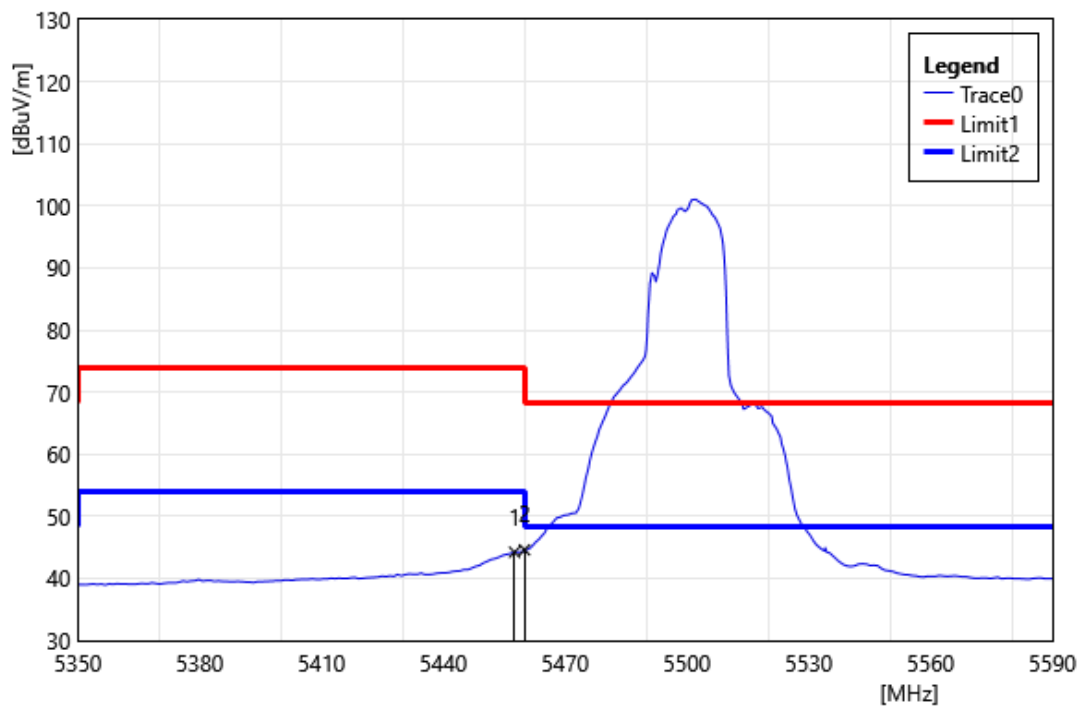


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.52	44.81	-0.58	44.23	54.00	-9.77	AVG
2	5460.00	45.18	-0.57	44.61	54.00	-9.39	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

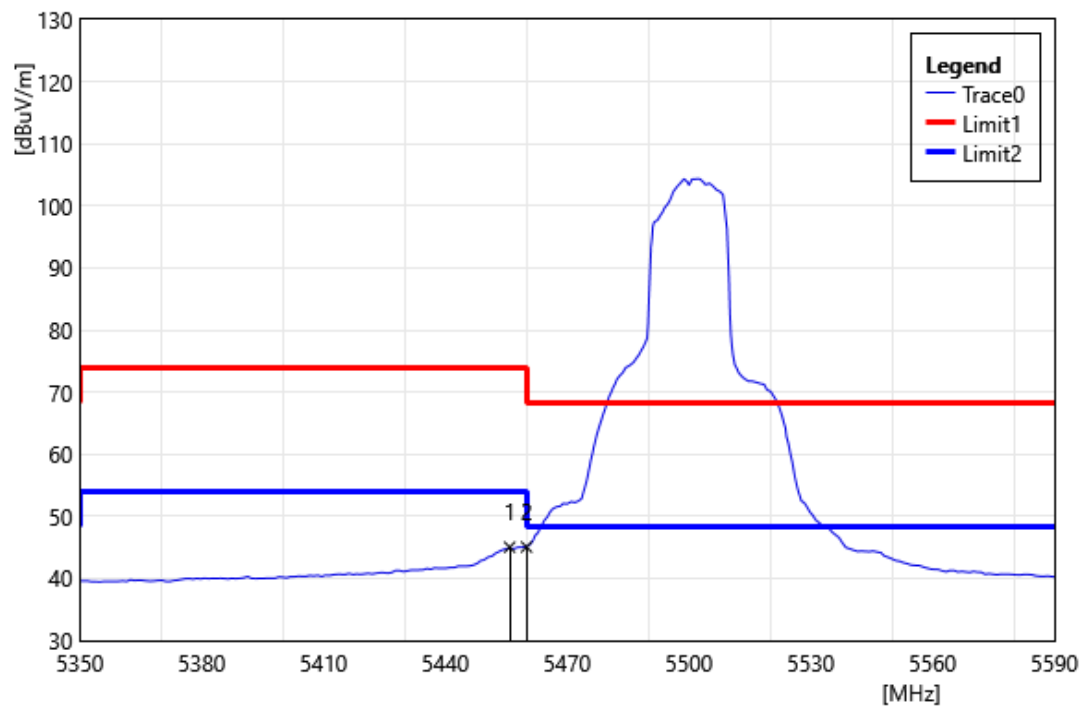


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.84	45.62	-0.58	45.04	54.00	-8.96	AVG
2	5460.00	45.64	-0.57	45.07	54.00	-8.94	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

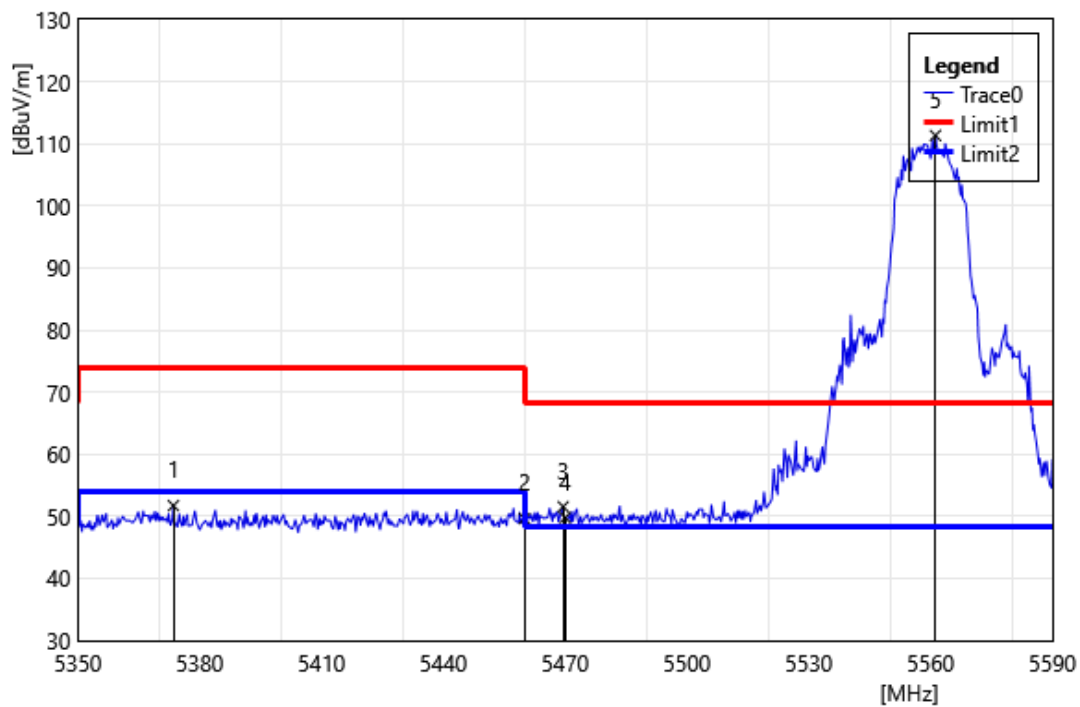


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5373.52	52.87	-1.13	51.74	74.00	-22.26	PEAK
2	5460.00	50.23	-0.57	49.66	74.00	-24.34	PEAK
3	5469.52	52.10	-0.56	51.54	68.20	-16.66	PEAK
4	5470.00	50.35	-0.56	49.79	68.20	-18.41	PEAK
5	5561.20	111.86	-0.52	111.35	68.20	43.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

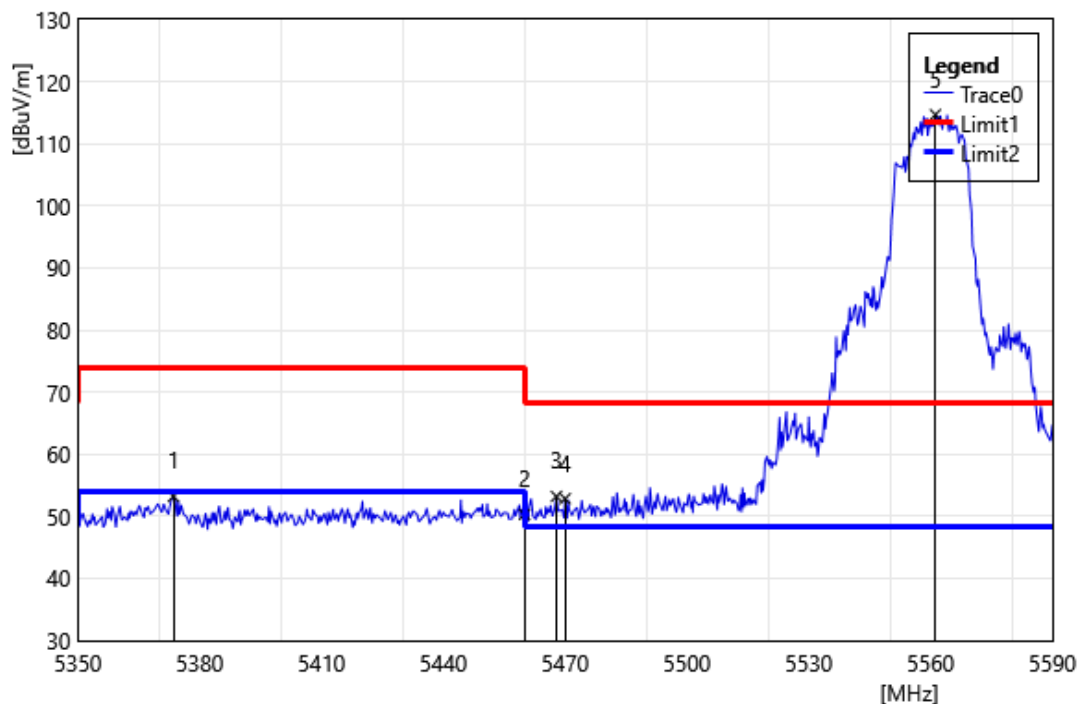


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5373.52	54.33	-1.13	53.20	74.00	-20.80	PEAK
2	5460.00	50.88	-0.57	50.31	74.00	-23.69	PEAK
3	5467.84	53.77	-0.56	53.21	68.20	-14.99	PEAK
4	5470.00	53.41	-0.56	52.85	68.20	-15.35	PEAK
5	5561.20	115.20	-0.52	114.68	68.20	46.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

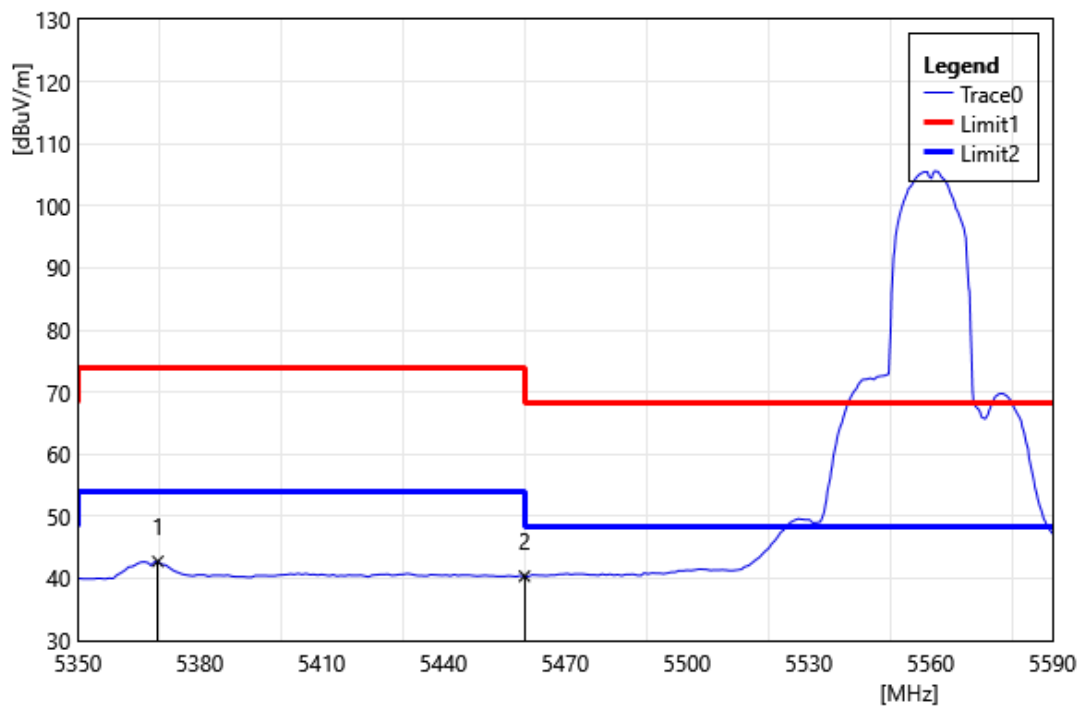


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5369.68	43.89	-1.15	42.74	54.00	-11.26	AVG
2	5460.00	40.93	-0.57	40.36	54.00	-13.64	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

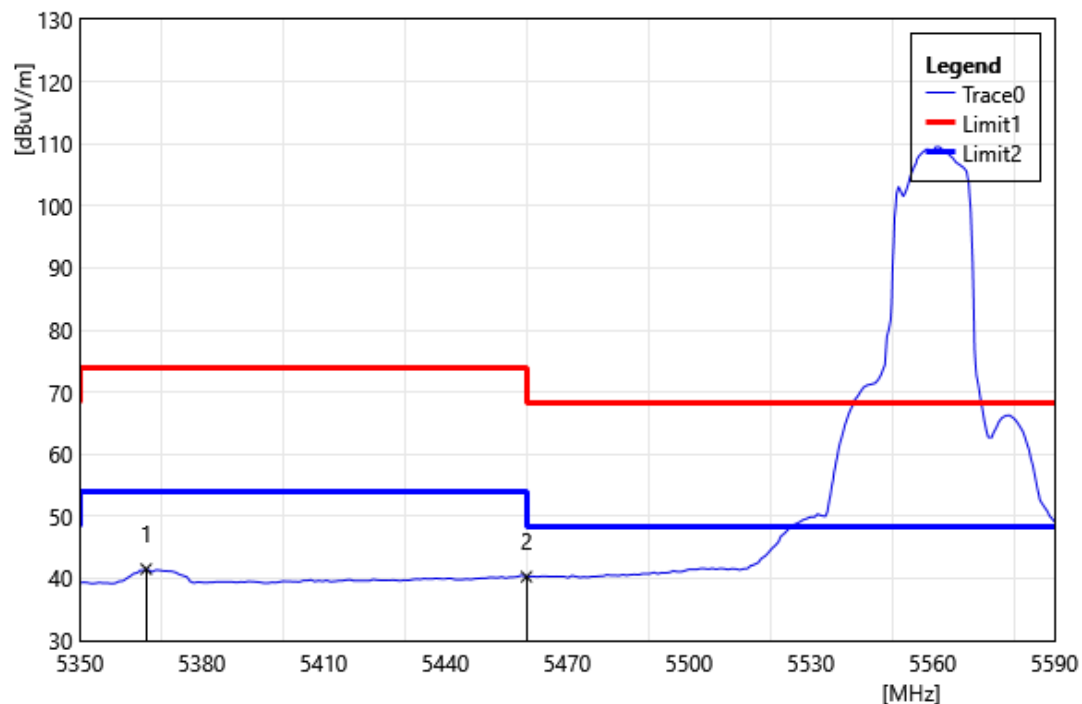


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5366.32	42.69	-1.18	41.51	54.00	-12.49	AVG
2	5460.00	40.85	-0.57	40.28	54.00	-13.72	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

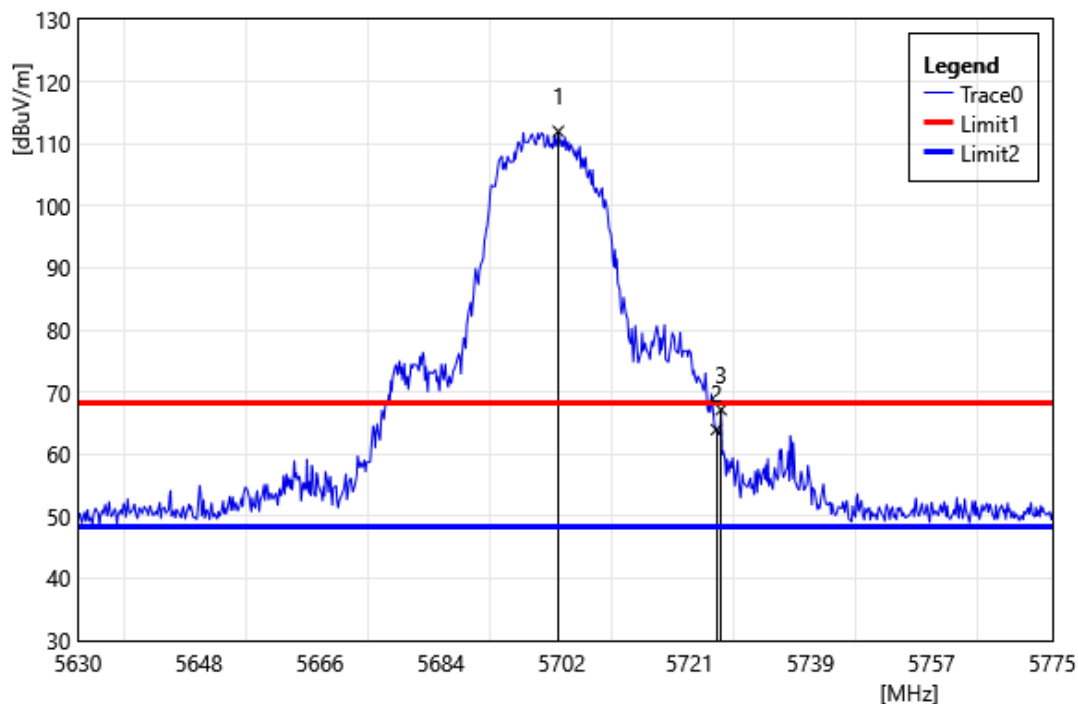


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5701.49	112.59	-0.59	112.00	68.20	43.80	PEAK
2	5725.00	64.31	-0.34	63.97	68.20	-4.23	PEAK
3	5725.70	67.51	-0.34	67.17	68.20	-1.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

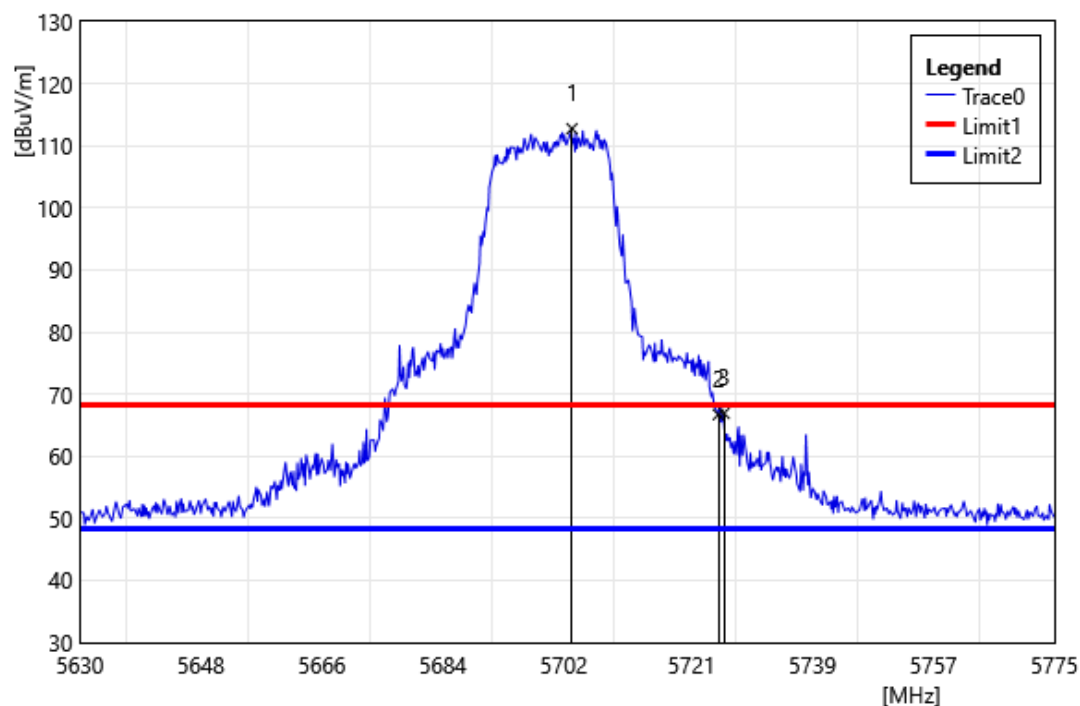


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5703.23	113.32	-0.58	112.75	68.20	44.55	PEAK
2	5725.00	67.06	-0.34	66.72	68.20	-1.48	PEAK
3	5725.85	67.25	-0.34	66.91	68.20	-1.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

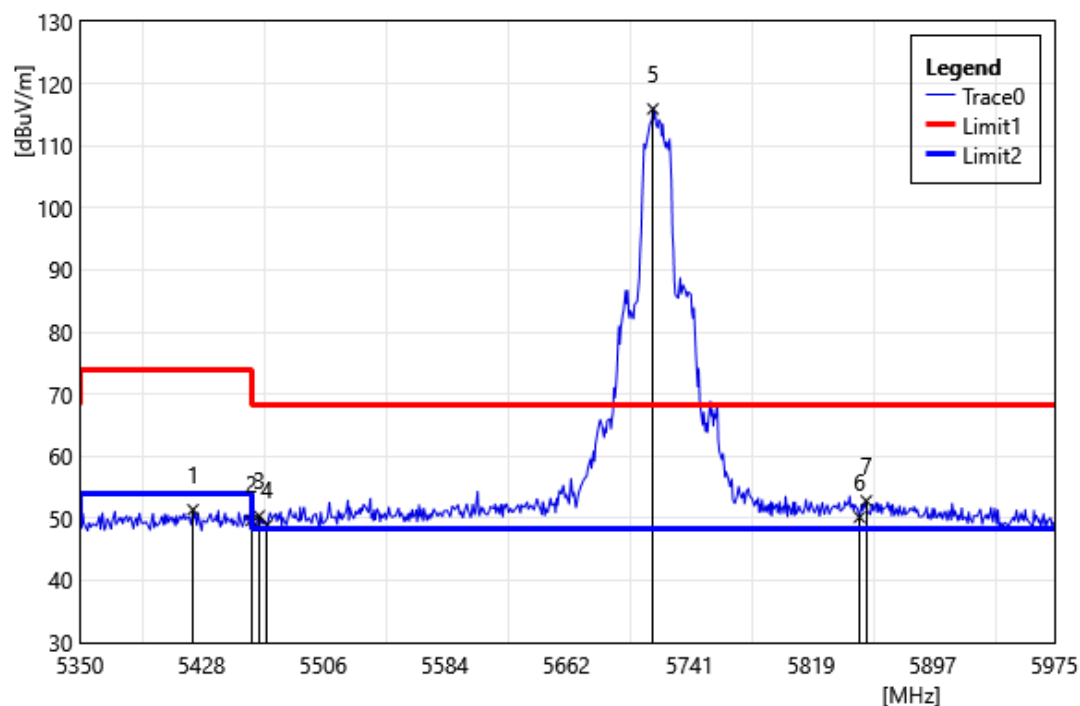


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5422.50	52.16	-0.78	51.38	74.00	-22.62	PEAK
2	5460.00	50.25	-0.57	49.68	74.00	-24.32	PEAK
3	5465.00	50.97	-0.57	50.40	68.20	-17.80	PEAK
4	5470.00	49.50	-0.56	48.94	68.20	-19.26	PEAK
5	5717.50	116.35	-0.42	115.93	68.20	47.73	PEAK
6	5850.00	49.89	0.28	50.17	68.20	-18.03	PEAK
7	5854.38	52.53	0.29	52.82	68.20	-15.38	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

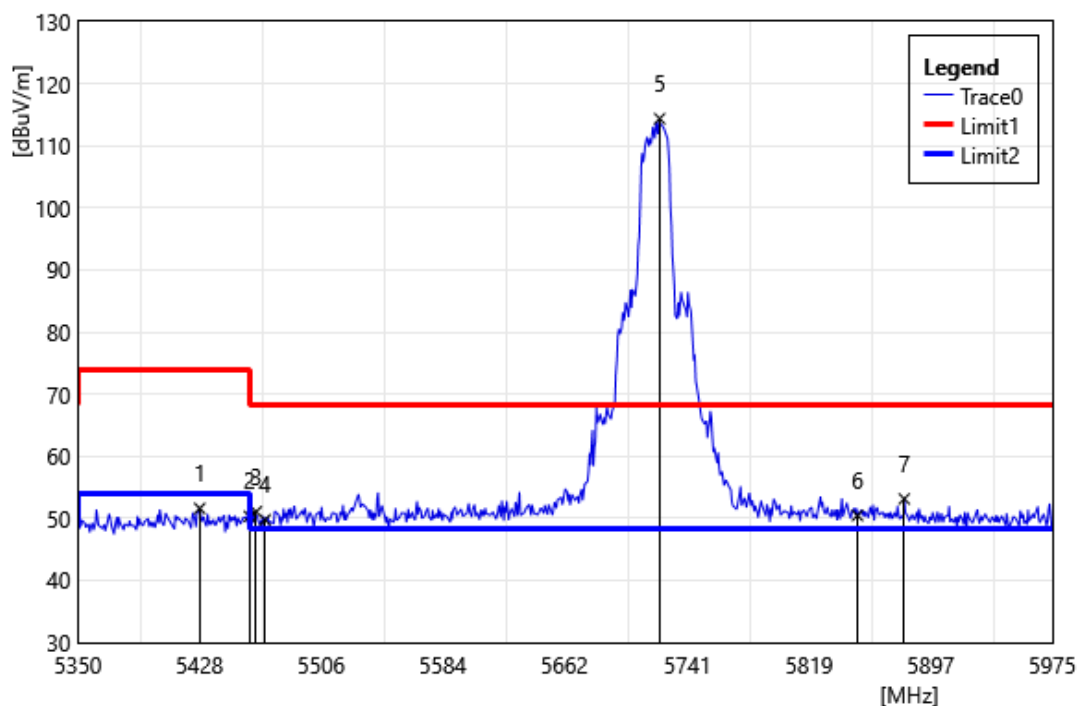


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5428.13	52.33	-0.74	51.59	74.00	-22.41	PEAK
2	5460.00	50.90	-0.57	50.33	74.00	-23.67	PEAK
3	5464.38	51.64	-0.57	51.07	68.20	-17.13	PEAK
4	5470.00	50.32	-0.56	49.76	68.20	-18.44	PEAK
5	5723.13	114.73	-0.36	114.37	68.20	46.17	PEAK
6	5850.00	50.18	0.28	50.46	68.20	-17.74	PEAK
7	5880.00	52.77	0.36	53.13	68.20	-15.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

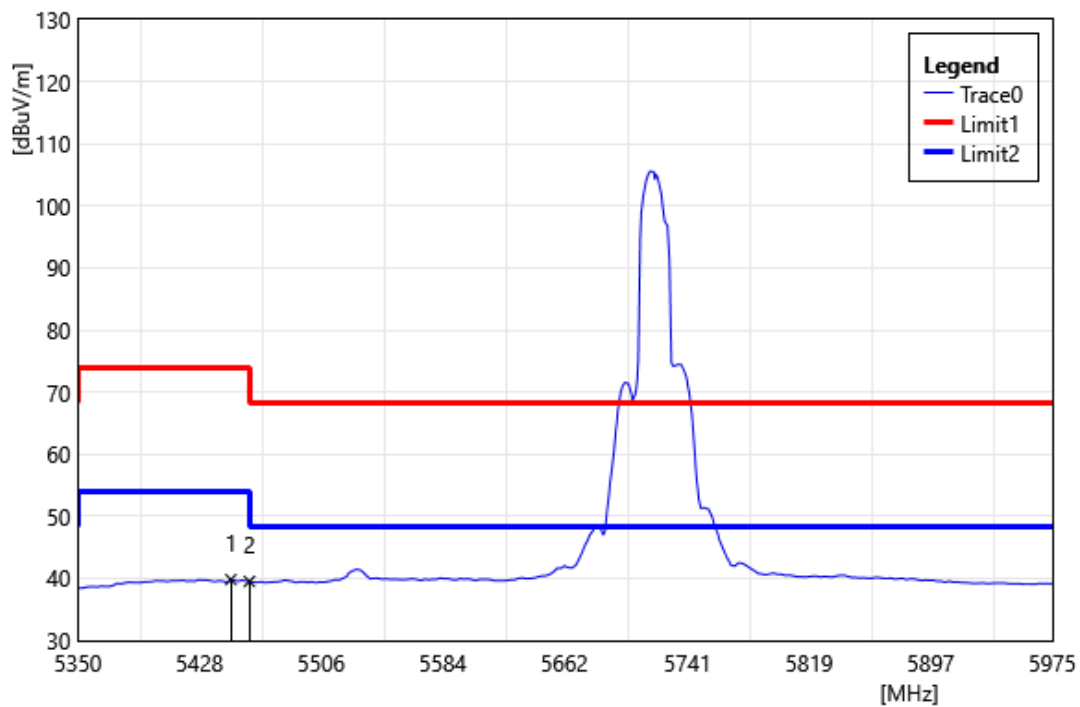


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.13	40.42	-0.60	39.82	54.00	-14.18	AVG
2	5460.00	40.09	-0.57	39.52	54.00	-14.48	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Horizontal		
Remark:			

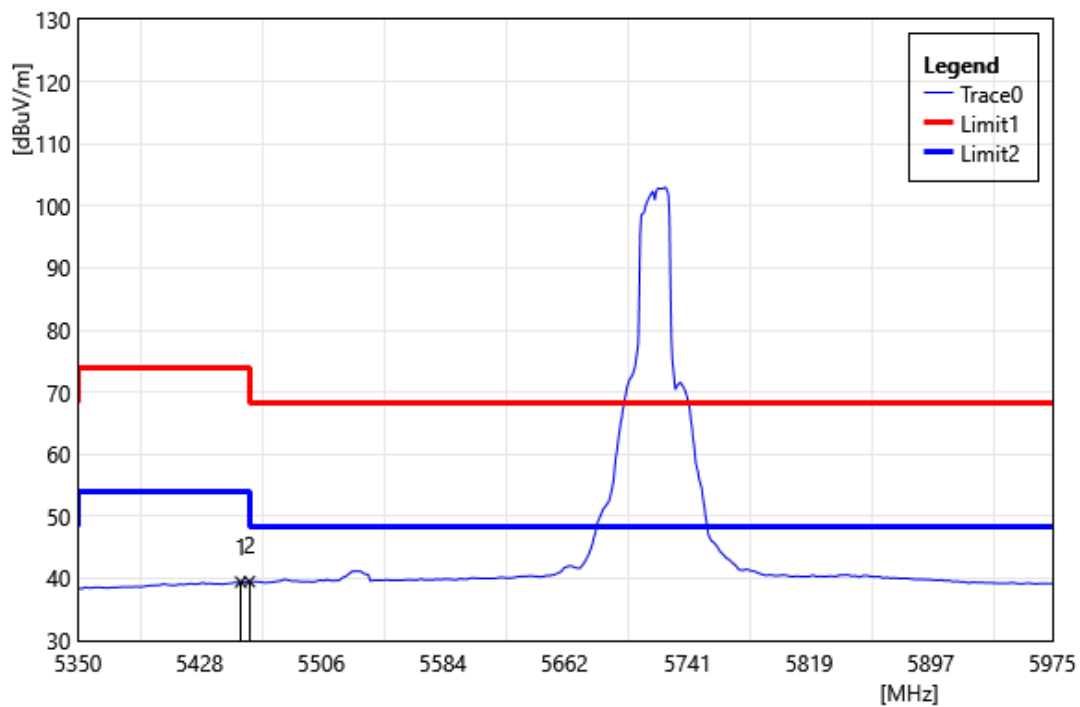


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.38	40.00	-0.58	39.42	54.00	-14.58	AVG
2	5460.00	40.07	-0.57	39.50	54.00	-14.50	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745 MHz		
Polarization:	Vertical		
Remark:			

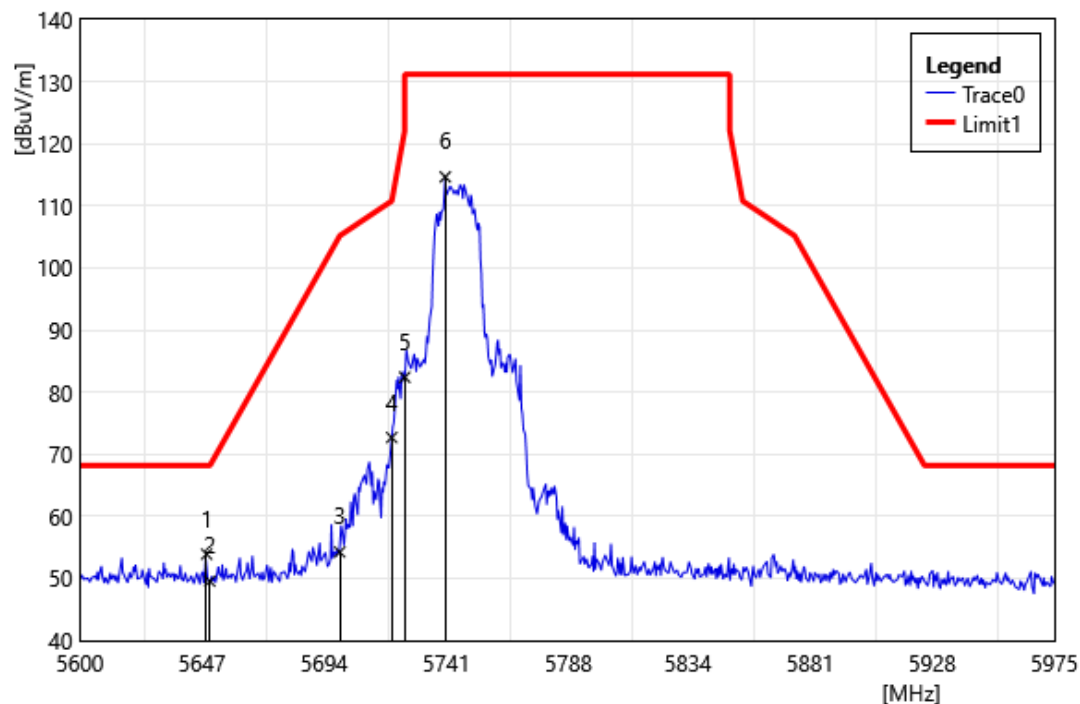


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5648.75	54.55	-0.64	53.91	68.20	-14.29	PEAK
2	5650.00	50.22	-0.64	49.58	68.20	-18.62	PEAK
3	5700.00	54.87	-0.61	54.26	105.20	-50.94	PEAK
4	5720.00	73.10	-0.40	72.70	110.80	-38.10	PEAK
5	5725.00	82.75	-0.34	82.41	122.20	-39.79	PEAK
6	5740.63	114.85	-0.18	114.67	131.20	-16.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745 MHz		
Polarization:	Horizontal		
Remark:			

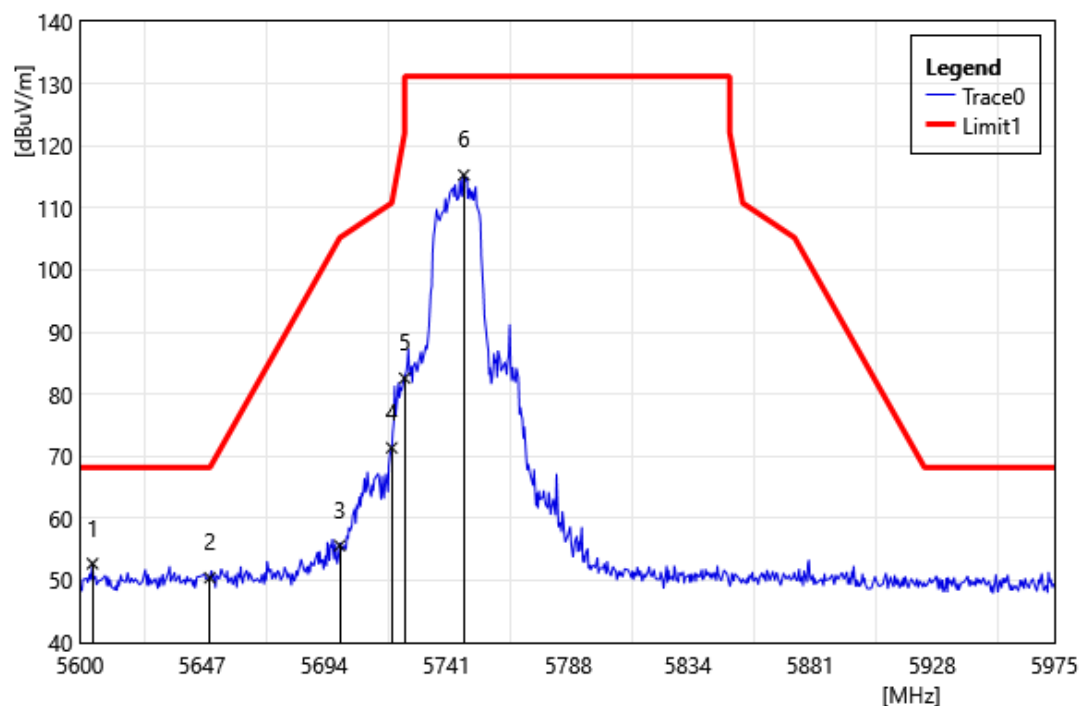


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5604.88	53.28	-0.58	52.71	68.20	-15.50	PEAK
2	5650.00	51.06	-0.64	50.42	68.20	-17.78	PEAK
3	5700.00	56.23	-0.61	55.62	105.20	-49.58	PEAK
4	5720.00	71.76	-0.40	71.36	110.80	-39.44	PEAK
5	5725.00	82.92	-0.34	82.58	122.20	-39.62	PEAK
6	5747.75	115.39	-0.10	115.29	131.20	-15.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

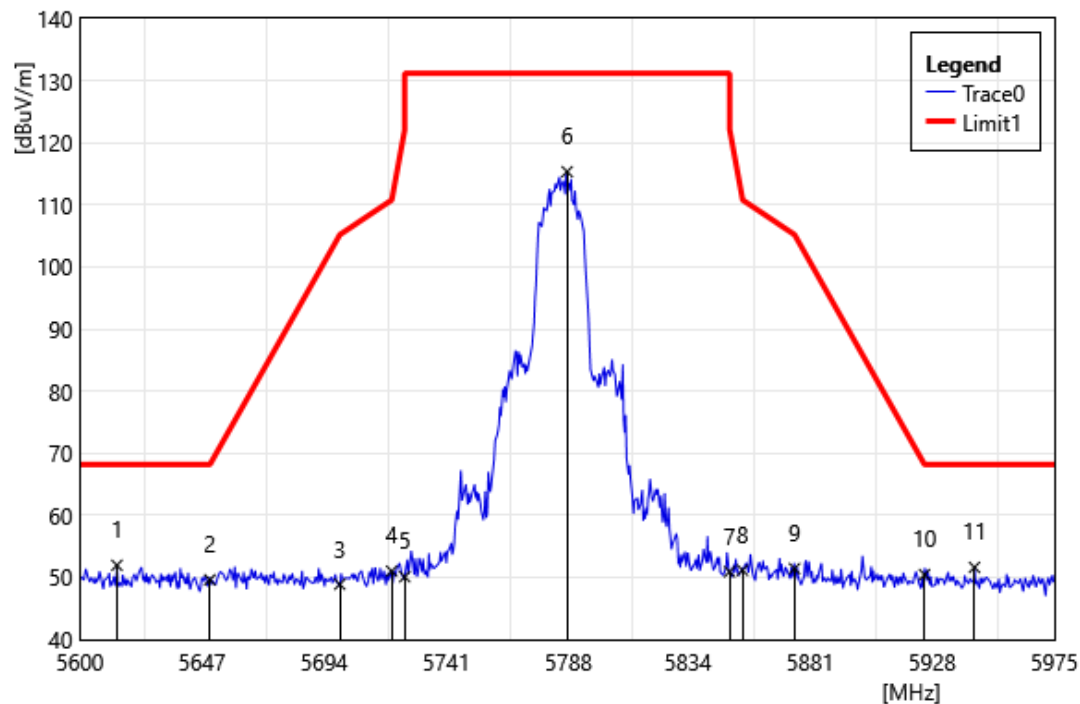


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5614.25	52.55	-0.59	51.96	68.20	-16.24	PEAK
2	5650.00	50.26	-0.64	49.62	68.20	-18.58	PEAK
3	5700.00	49.51	-0.61	48.90	105.20	-56.30	PEAK
4	5720.00	51.43	-0.40	51.03	110.80	-59.77	PEAK
5	5725.00	50.45	-0.34	50.11	122.20	-72.09	PEAK
6	5787.50	115.26	0.09	115.35	131.20	-15.85	PEAK
7	5850.00	50.64	0.28	50.92	122.20	-71.28	PEAK
8	5855.00	50.88	0.29	51.17	110.80	-59.63	PEAK
9	5875.00	51.10	0.34	51.44	105.20	-53.76	PEAK
10	5925.00	50.19	0.28	50.47	68.20	-17.73	PEAK
11	5944.25	51.45	0.17	51.62	68.20	-16.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

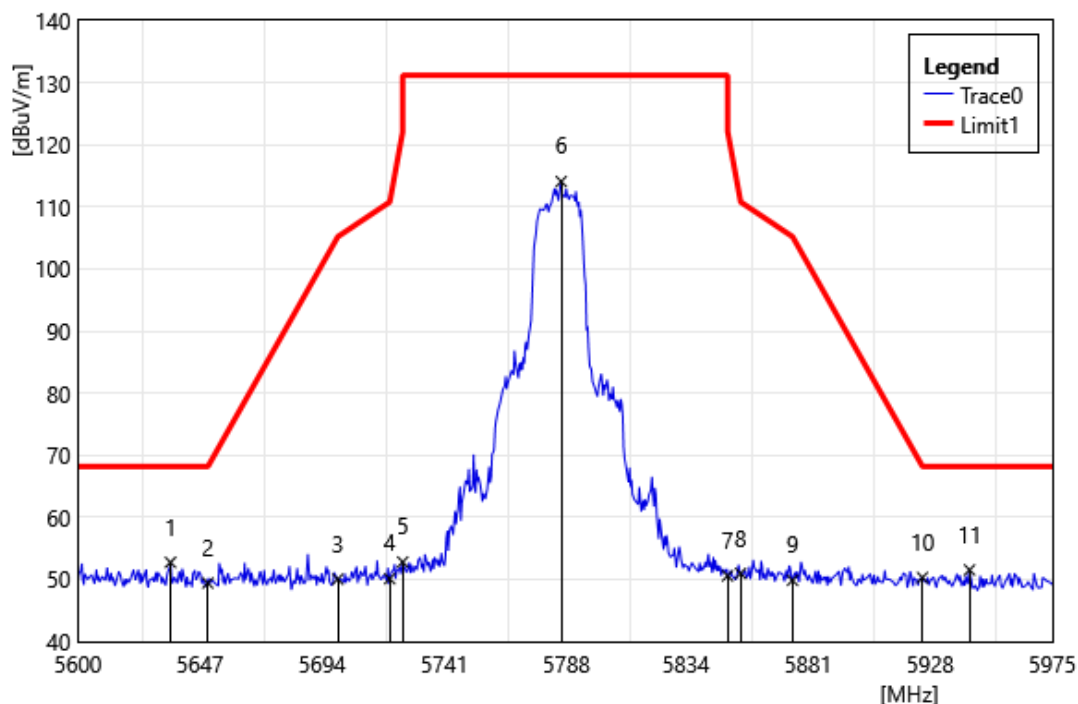


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5635.63	53.38	-0.62	52.76	68.20	-15.44	PEAK
2	5650.00	50.06	-0.64	49.42	68.20	-18.78	PEAK
3	5700.00	50.65	-0.61	50.04	105.20	-55.16	PEAK
4	5720.00	50.52	-0.40	50.12	110.80	-60.68	PEAK
5	5725.00	53.15	-0.34	52.81	122.20	-69.39	PEAK
6	5786.00	113.99	0.09	114.08	131.20	-17.12	PEAK
7	5850.00	50.30	0.28	50.58	122.20	-71.62	PEAK
8	5855.00	50.67	0.29	50.96	110.80	-59.84	PEAK
9	5875.00	49.52	0.34	49.86	105.20	-55.34	PEAK
10	5925.00	50.02	0.28	50.30	68.20	-17.90	PEAK
11	5943.13	51.35	0.18	51.53	68.20	-16.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

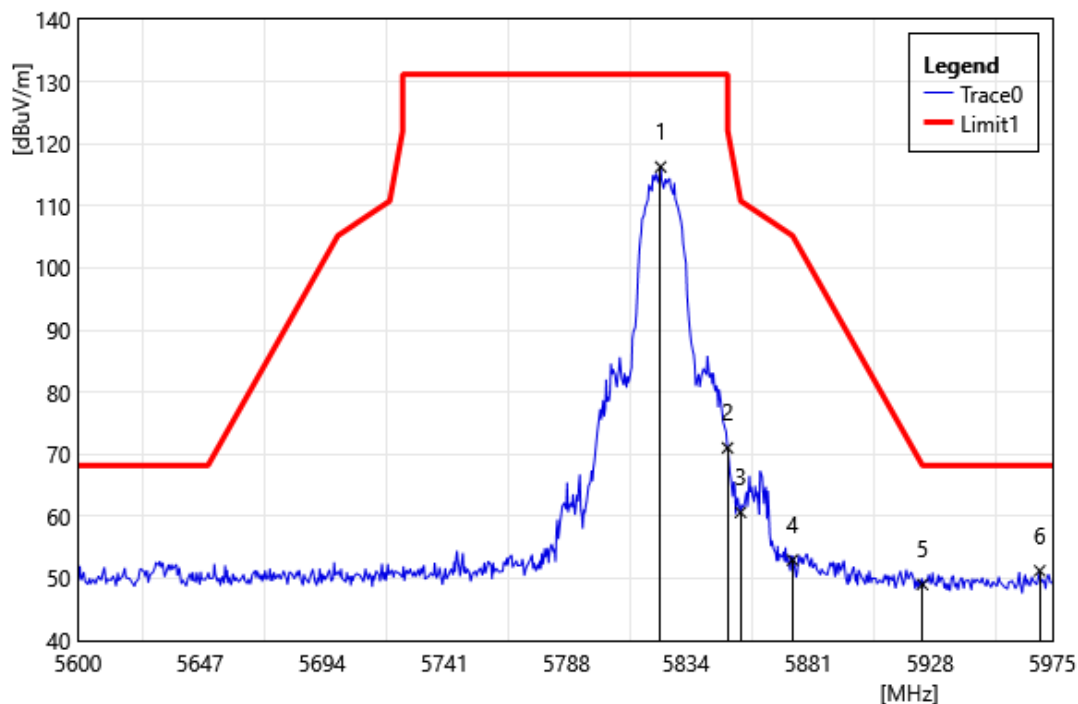


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5824.25	116.07	0.21	116.28	131.20	-14.92	PEAK
2	5850.00	70.75	0.28	71.03	122.20	-51.17	PEAK
3	5855.00	60.35	0.29	60.64	110.80	-50.16	PEAK
4	5875.00	52.62	0.34	52.97	105.20	-52.24	PEAK
5	5925.00	48.75	0.28	49.03	68.20	-19.17	PEAK
6	5970.13	51.05	0.19	51.24	68.20	-16.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

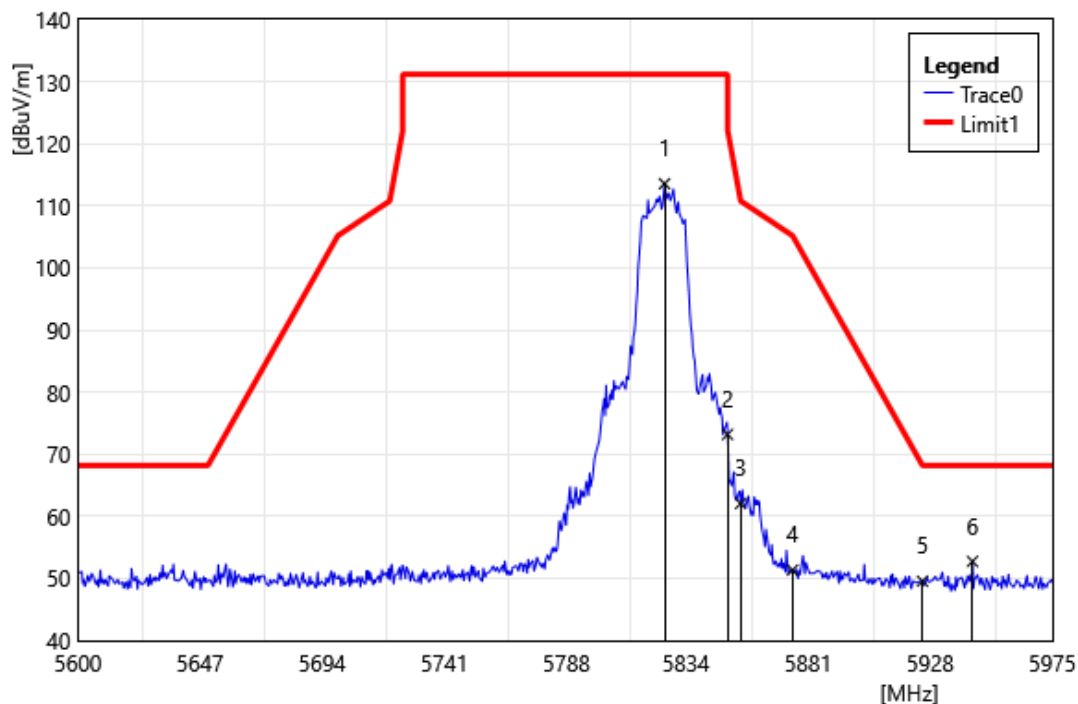


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5825.75	113.35	0.22	113.57	131.20	-17.63	PEAK
2	5850.00	72.92	0.28	73.20	122.20	-49.00	PEAK
3	5855.00	61.77	0.29	62.06	110.80	-48.74	PEAK
4	5875.00	51.01	0.34	51.35	105.20	-53.85	PEAK
5	5925.00	49.28	0.28	49.56	68.20	-18.64	PEAK
6	5944.25	52.57	0.17	52.74	68.20	-15.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

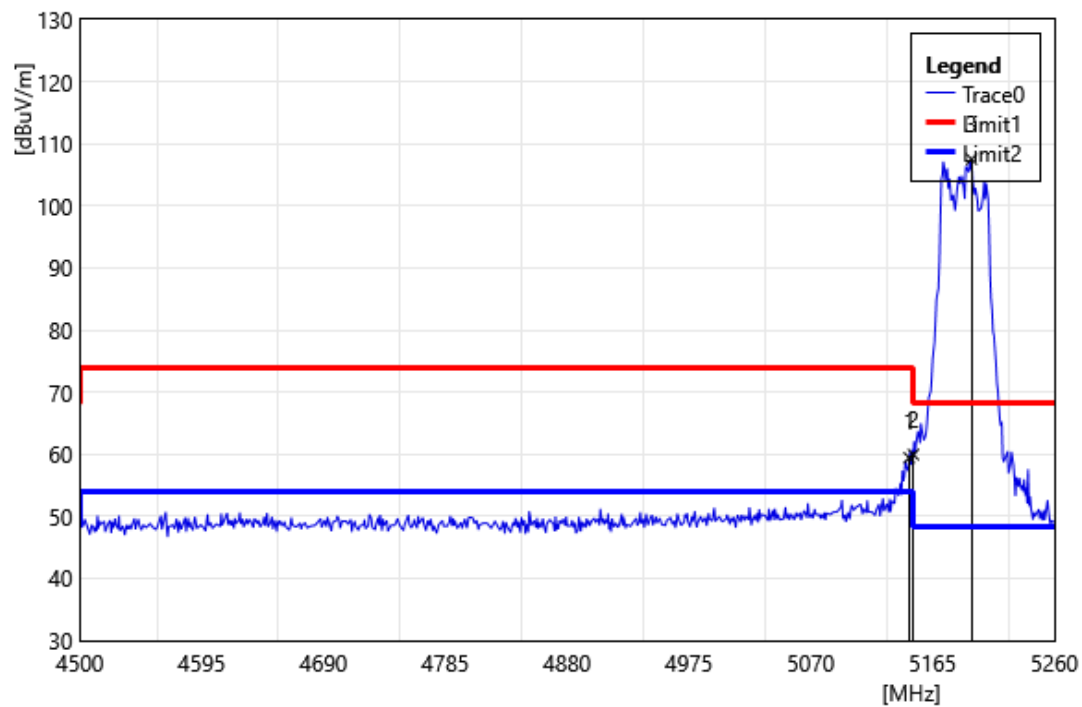


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	60.34	-0.90	59.44	74.00	-14.56	PEAK
2	5150.00	60.86	-0.91	59.95	74.00	-14.05	PEAK
3	5195.40	108.66	-1.13	107.53	68.20	39.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

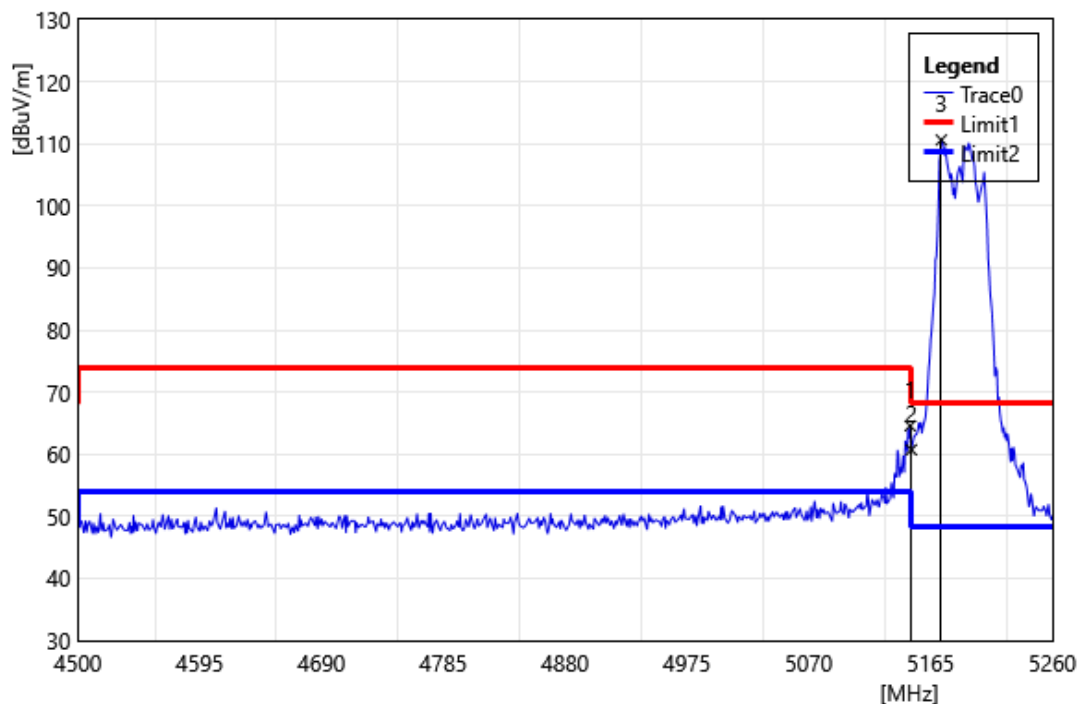


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5149.04	65.50	-0.91	64.59	74.00	-9.41	PEAK
2	5150.00	61.63	-0.91	60.72	74.00	-13.28	PEAK
3	5173.36	111.64	-1.02	110.62	68.20	42.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

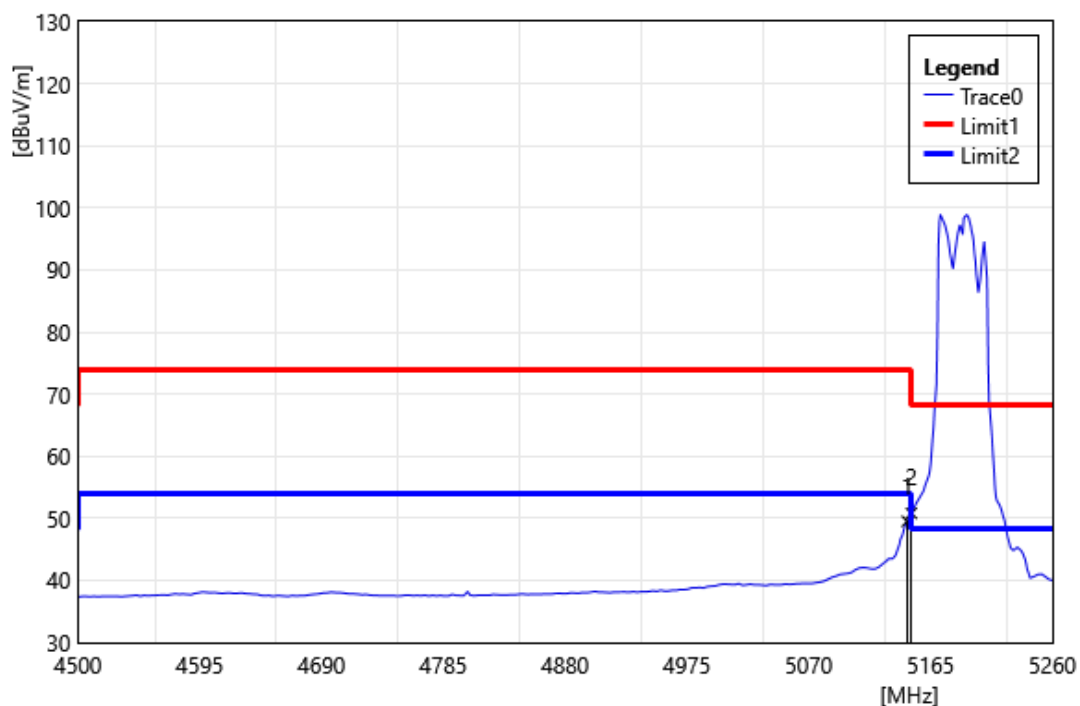


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	50.42	-0.90	49.52	54.00	-4.48	AVG
2	5150.00	51.73	-0.91	50.82	54.00	-3.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

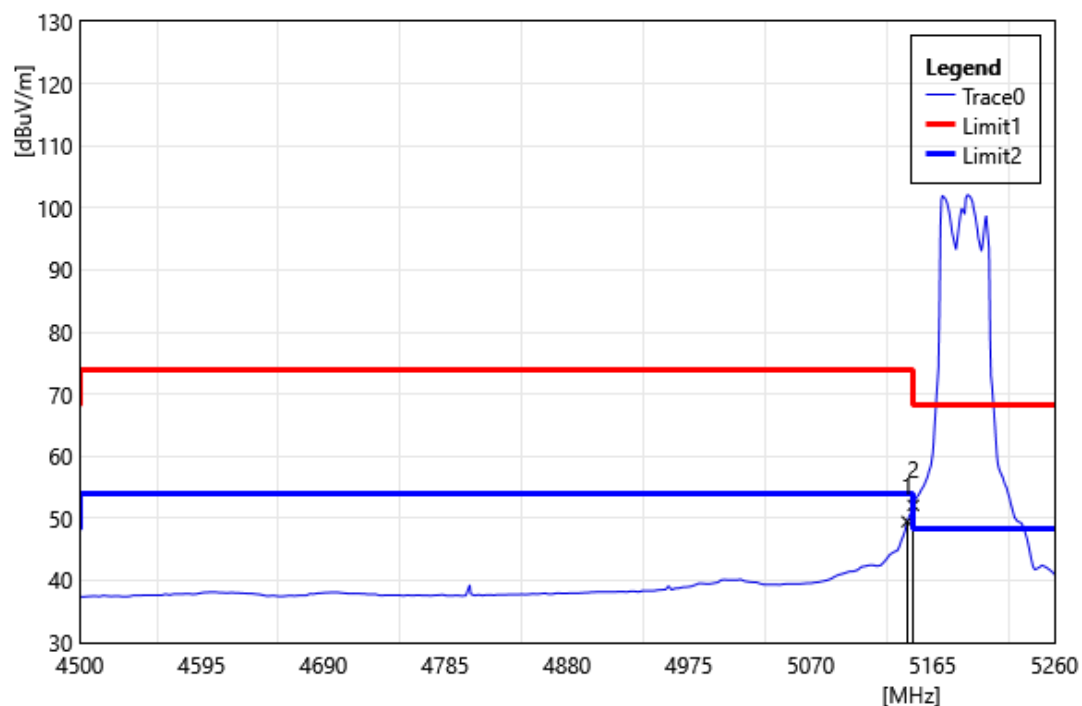


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	50.37	-0.90	49.47	54.00	-4.53	AVG
2	5150.00	53.00	-0.91	52.10	54.00	-1.90	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

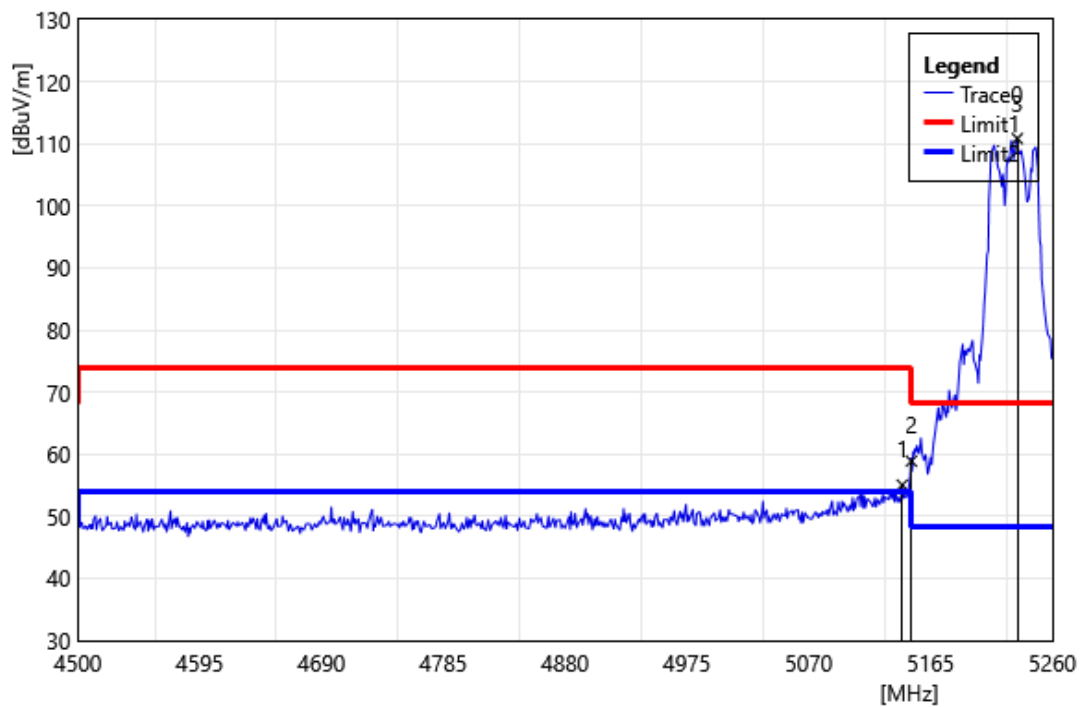


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	55.96	-0.90	55.06	74.00	-18.94	PEAK
2	5150.00	59.80	-0.91	58.89	74.00	-15.11	PEAK
3	5232.64	112.22	-1.38	110.84	68.20	42.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

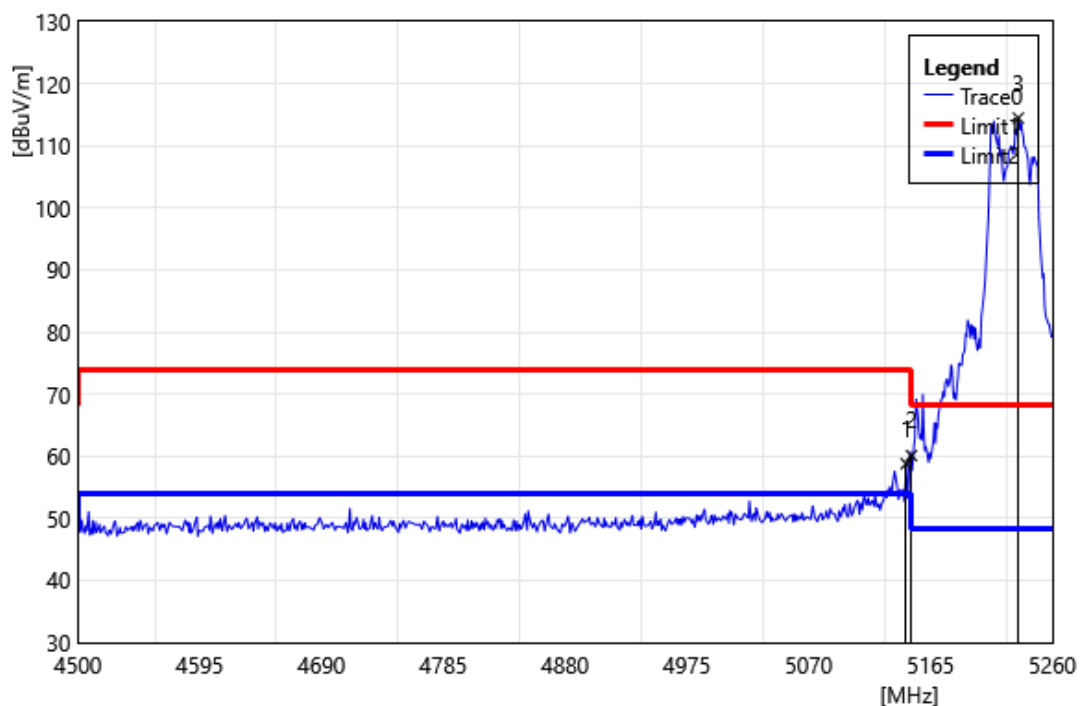


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	59.69	-0.90	58.79	74.00	-15.21	PEAK
2	5150.00	61.02	-0.91	60.11	74.00	-13.89	PEAK
3	5233.40	115.85	-1.39	114.46	68.20	46.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

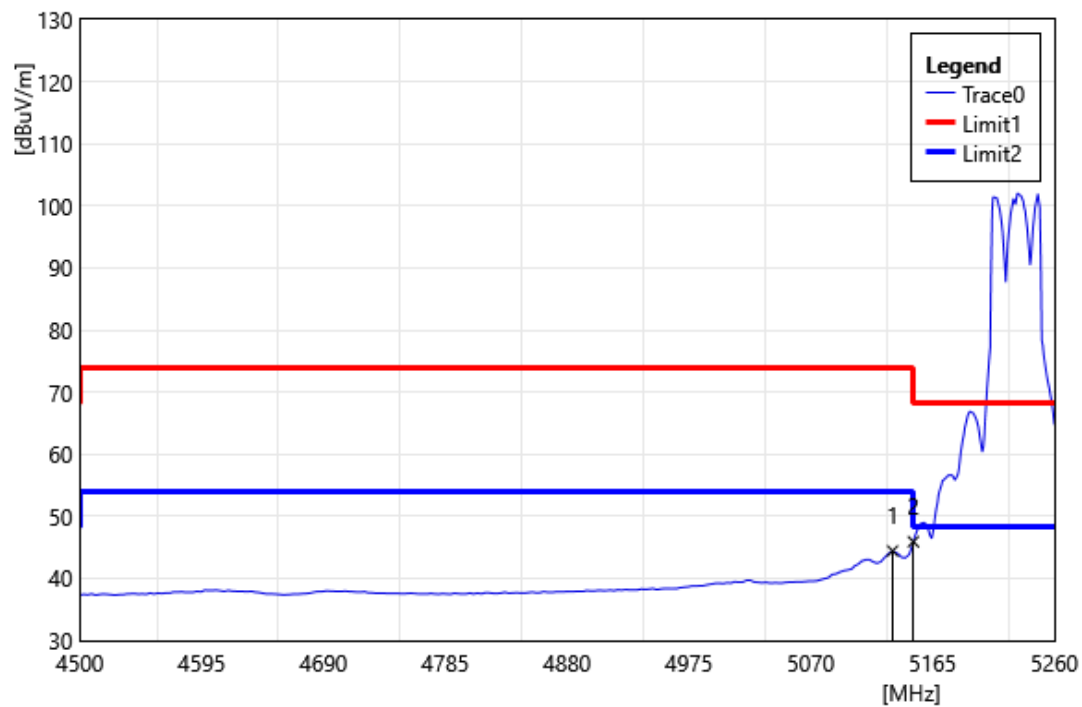


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5133.84	45.31	-0.89	44.42	54.00	-9.58	AVG
2	5150.00	46.82	-0.91	45.91	54.00	-8.09	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

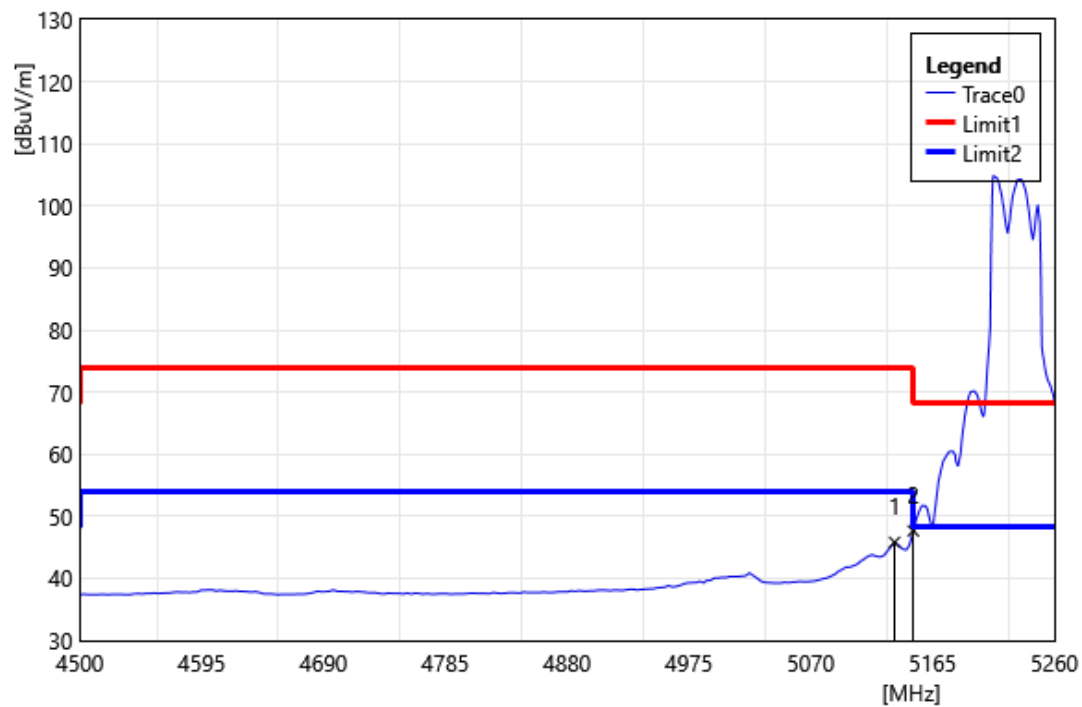


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5135.36	46.71	-0.89	45.82	54.00	-8.18	AVG
2	5150.00	48.58	-0.91	47.67	54.00	-6.33	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

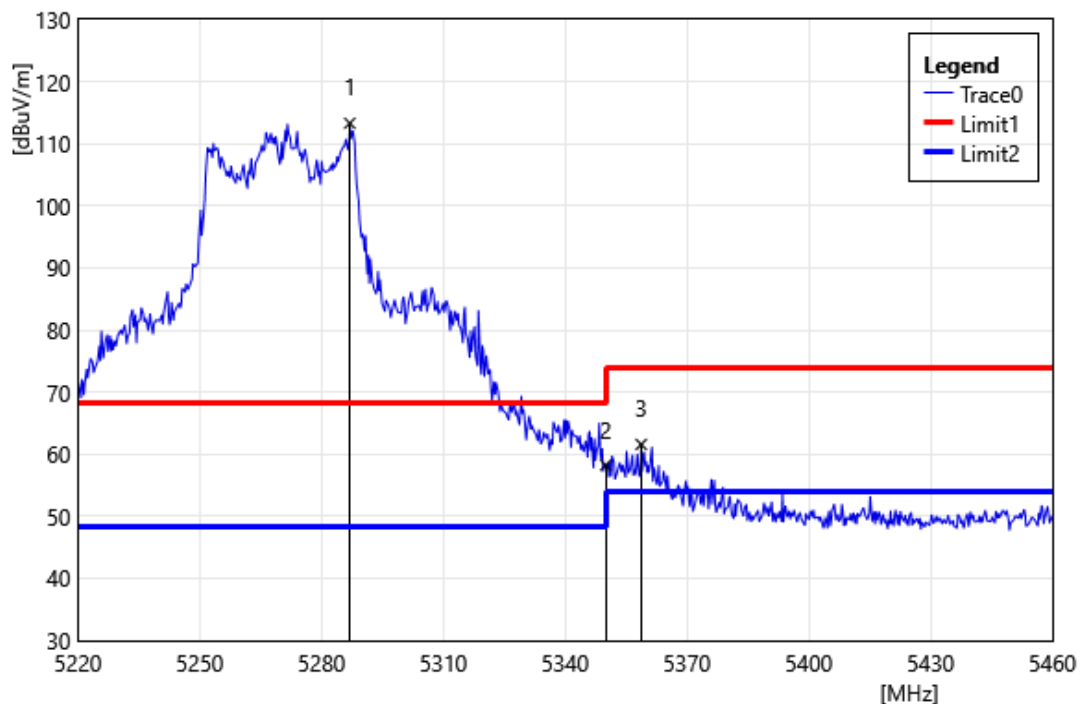


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5286.96	114.92	-1.61	113.31	68.20	45.11	PEAK
2	5350.00	59.53	-1.29	58.24	74.00	-15.76	PEAK
3	5358.72	62.81	-1.23	61.58	74.00	-12.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

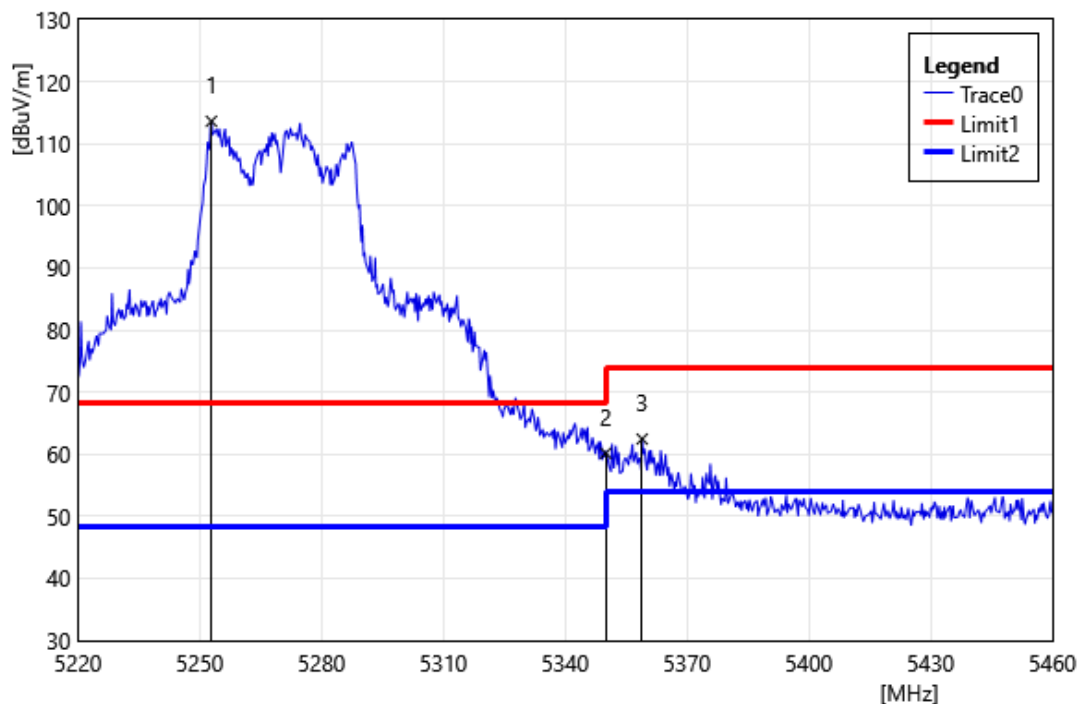


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5252.88	115.13	-1.51	113.62	68.20	45.42	PEAK
2	5350.00	61.46	-1.29	60.17	74.00	-13.83	PEAK
3	5358.96	63.68	-1.23	62.45	74.00	-11.55	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

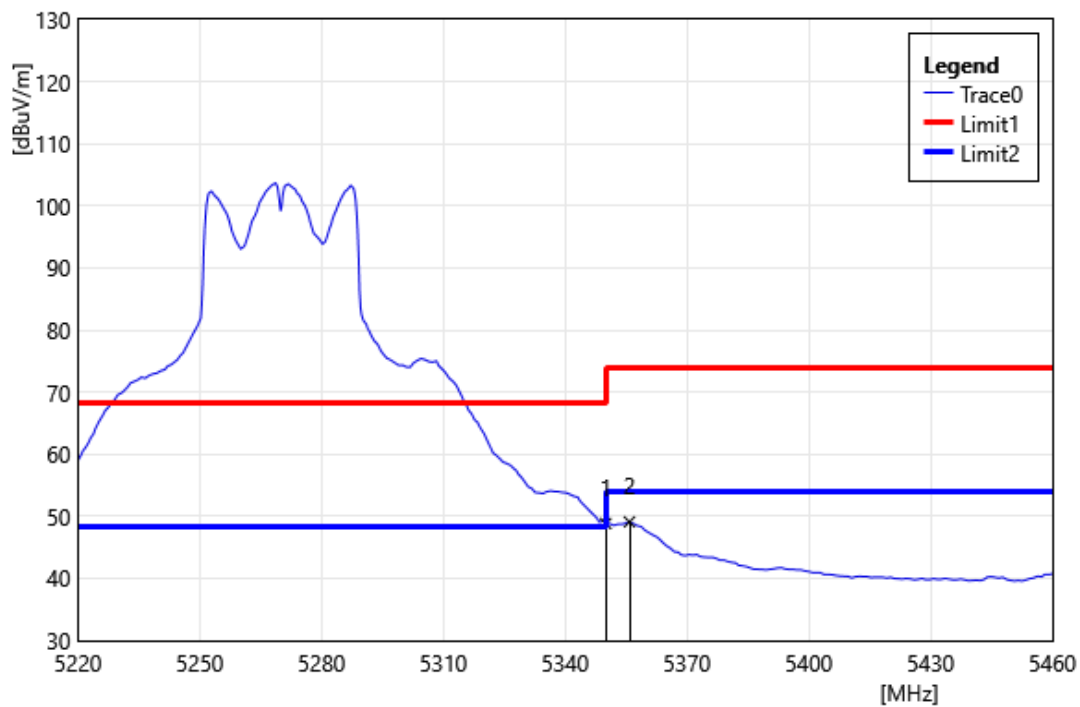


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	50.14	-1.29	48.84	54.00	-5.16	AVG
2	5355.84	50.36	-1.25	49.11	54.00	-4.89	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

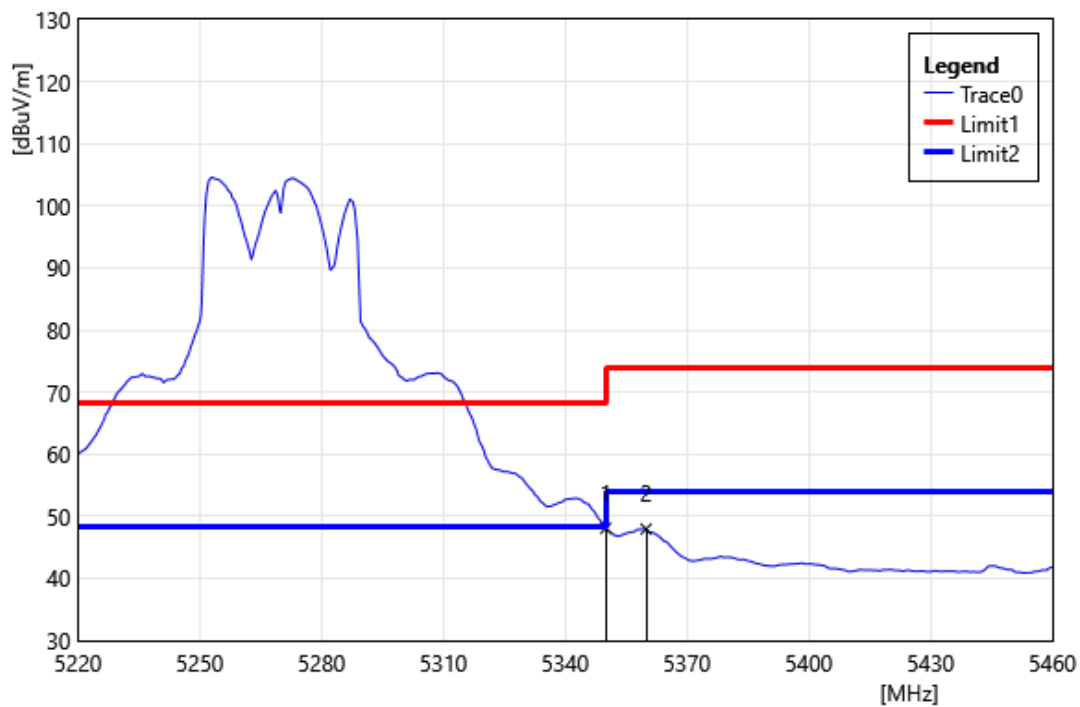


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	49.38	-1.29	48.08	54.00	-5.92	AVG
2	5359.92	49.18	-1.22	47.97	54.00	-6.04	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

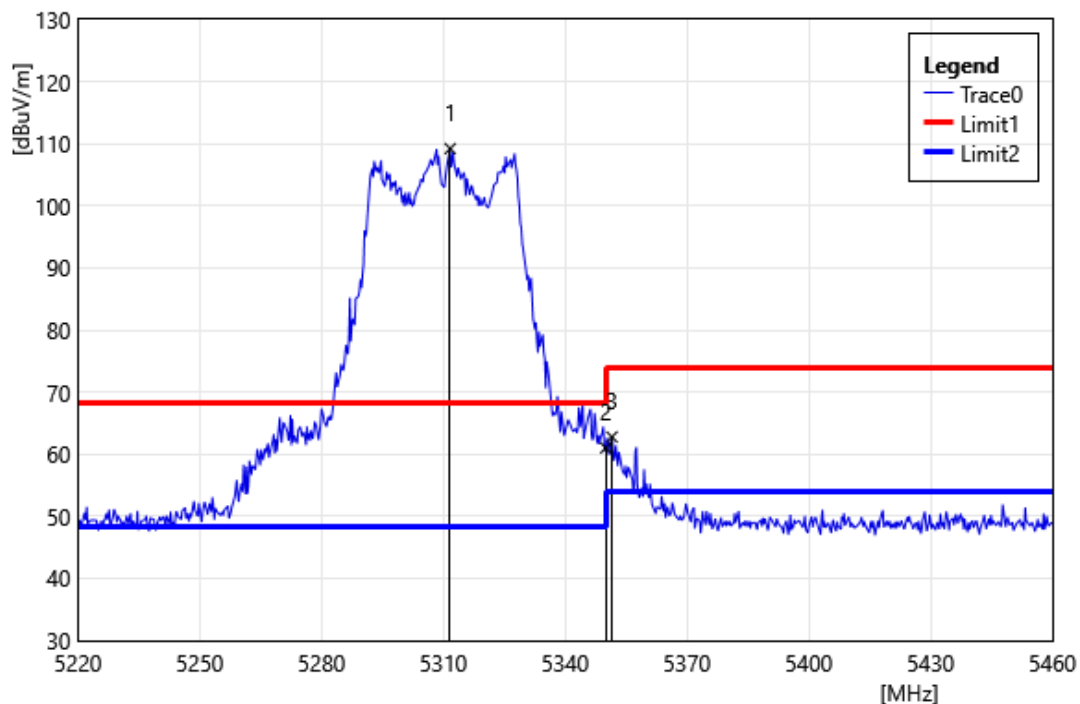


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5311.68	110.79	-1.56	109.23	68.20	41.03	PEAK
2	5350.00	62.31	-1.29	61.02	74.00	-12.98	PEAK
3	5351.52	64.07	-1.28	62.79	74.00	-11.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

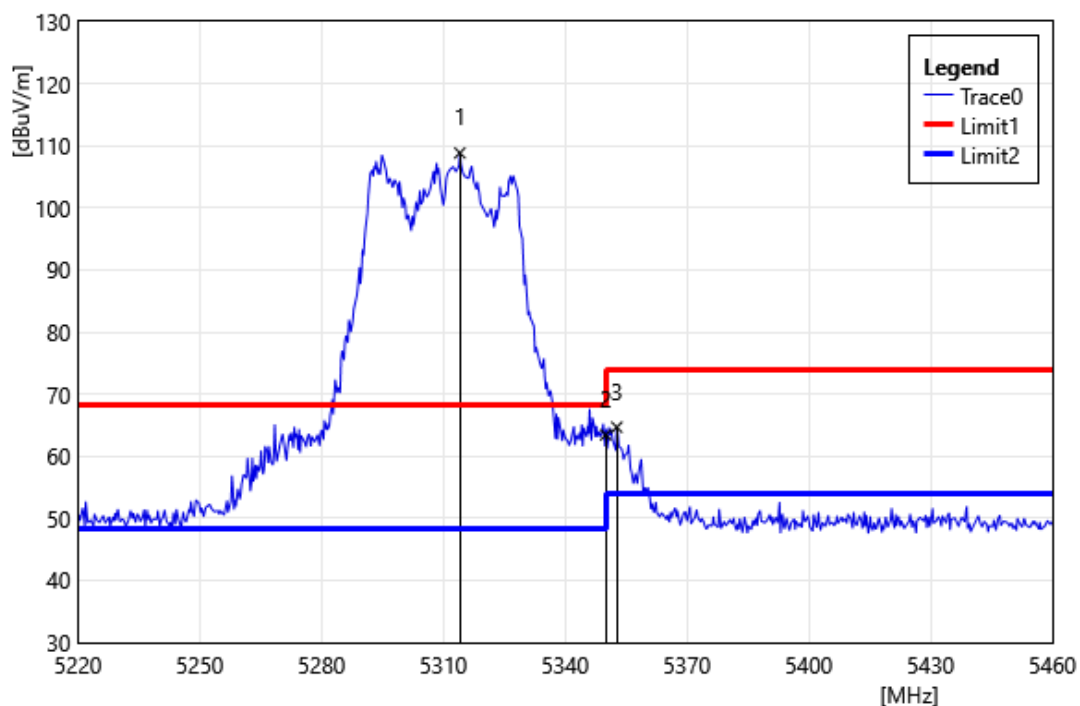


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5314.08	110.40	-1.55	108.85	68.20	40.65	PEAK
2	5350.00	64.75	-1.29	63.46	74.00	-10.54	PEAK
3	5352.72	65.95	-1.27	64.68	74.00	-9.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

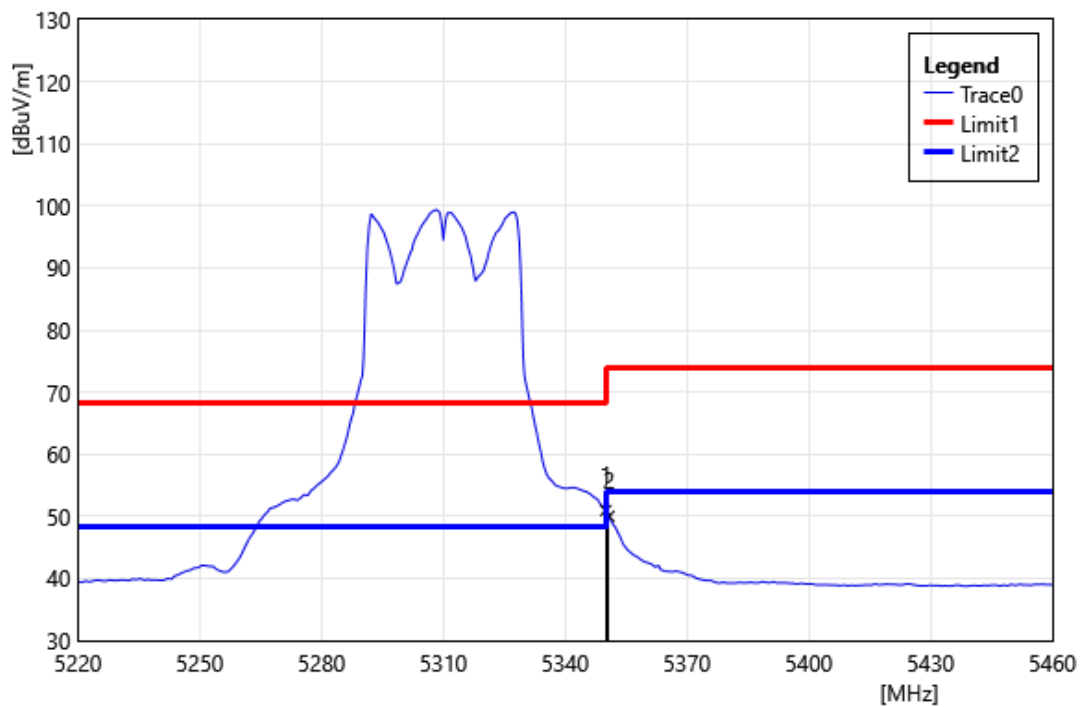


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	52.24	-1.29	50.95	54.00	-3.05	AVG
2	5350.80	51.31	-1.29	50.02	54.00	-3.98	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

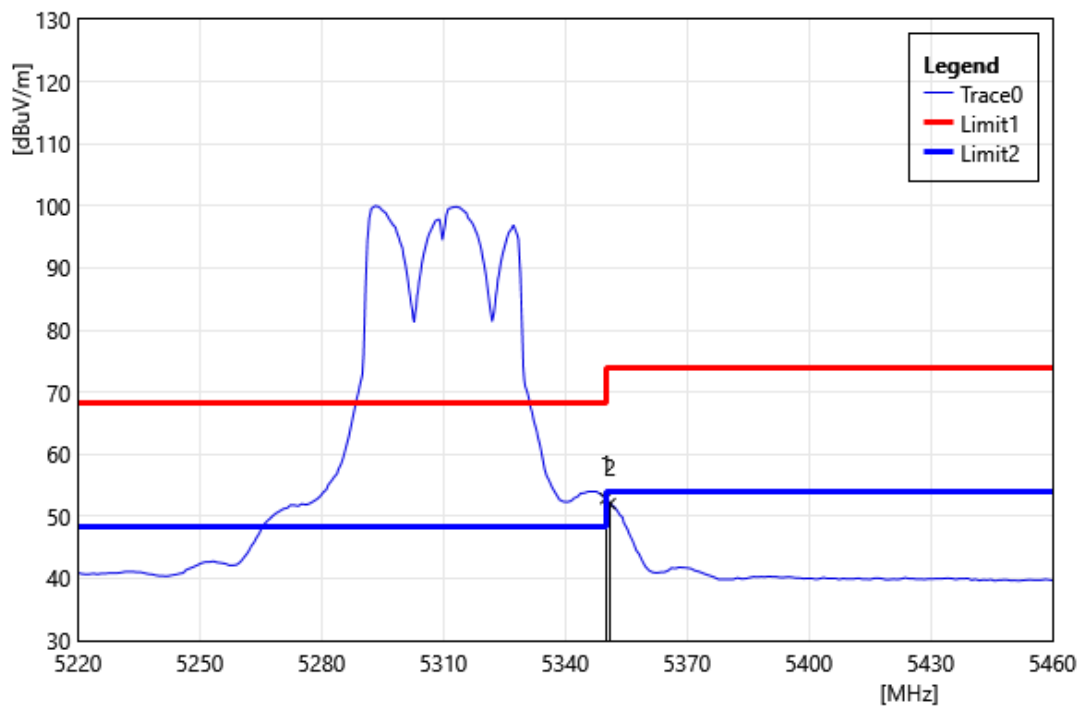


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	54.17	-1.29	52.88	54.00	-1.12	AVG
2	5351.04	53.30	-1.28	52.03	54.00	-1.98	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

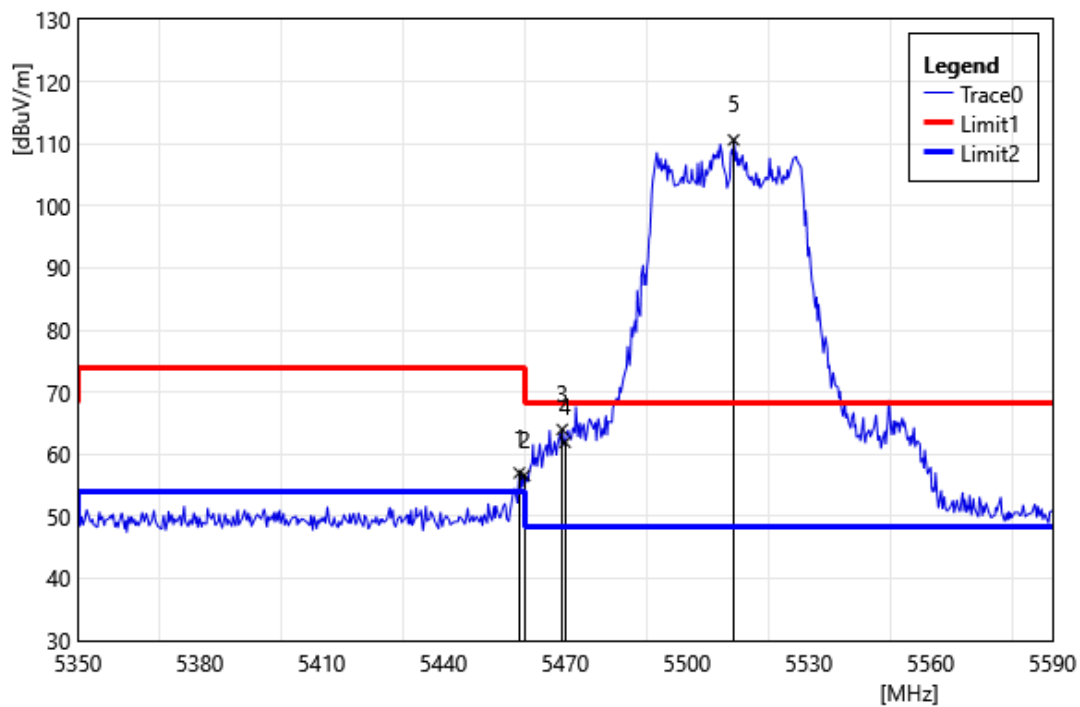


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	57.57	-0.57	57.00	74.00	-17.00	PEAK
2	5460.00	57.17	-0.57	56.60	74.00	-17.40	PEAK
3	5469.28	64.55	-0.56	63.99	68.20	-4.21	PEAK
4	5470.00	62.48	-0.56	61.92	68.20	-6.28	PEAK
5	5511.52	111.14	-0.52	110.62	68.20	42.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

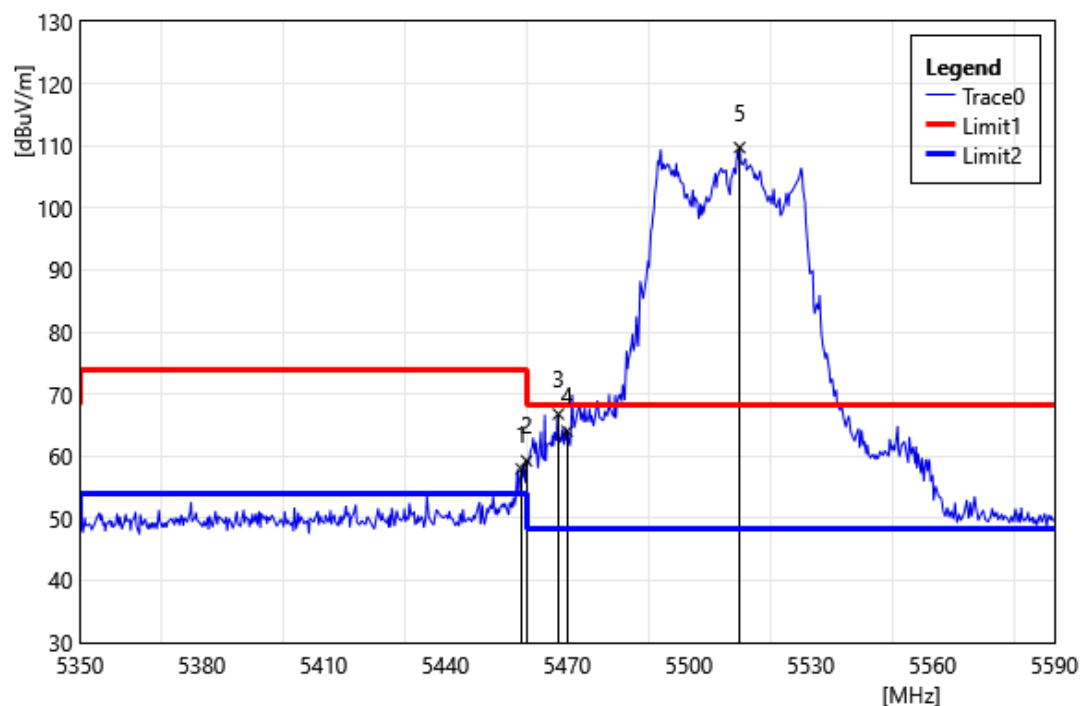


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	58.51	-0.57	57.94	74.00	-16.06	PEAK
2	5460.00	59.84	-0.57	59.27	74.00	-14.73	PEAK
3	5467.84	67.36	-0.56	66.80	68.20	-1.40	PEAK
4	5470.00	64.61	-0.56	64.05	68.20	-4.15	PEAK
5	5512.48	110.23	-0.52	109.71	68.20	41.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

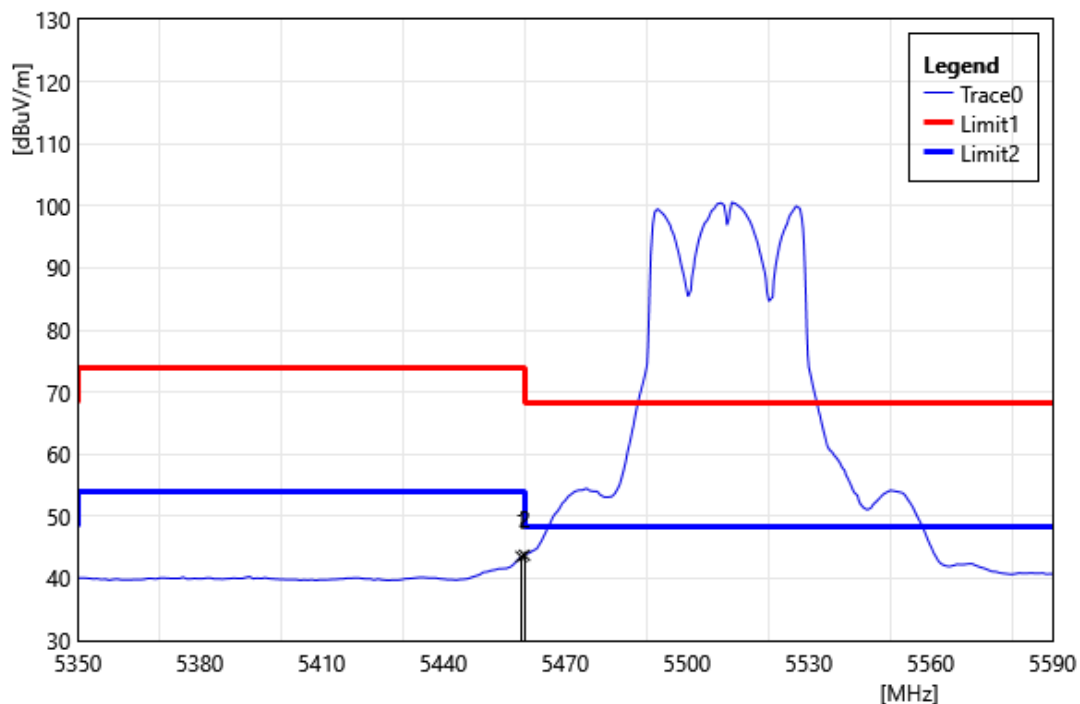


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	44.09	-0.57	43.52	54.00	-10.48	AVG
2	5460.00	44.29	-0.57	43.72	54.00	-10.28	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

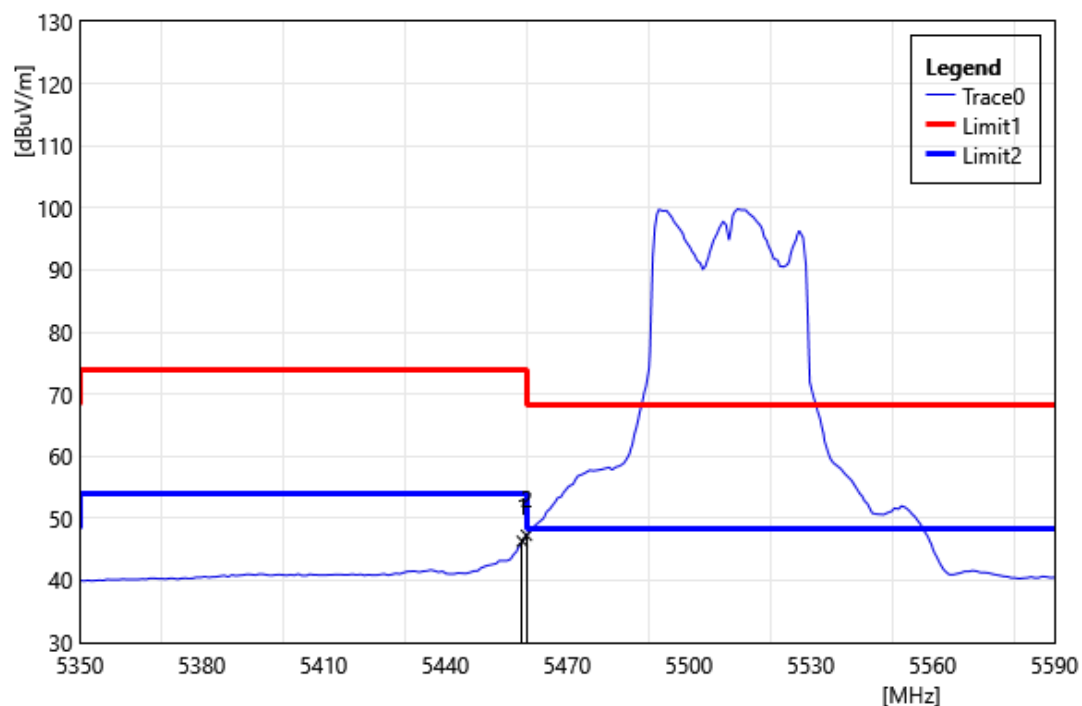


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	46.87	-0.57	46.30	54.00	-7.70	AVG
2	5460.00	47.85	-0.57	47.28	54.00	-6.72	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

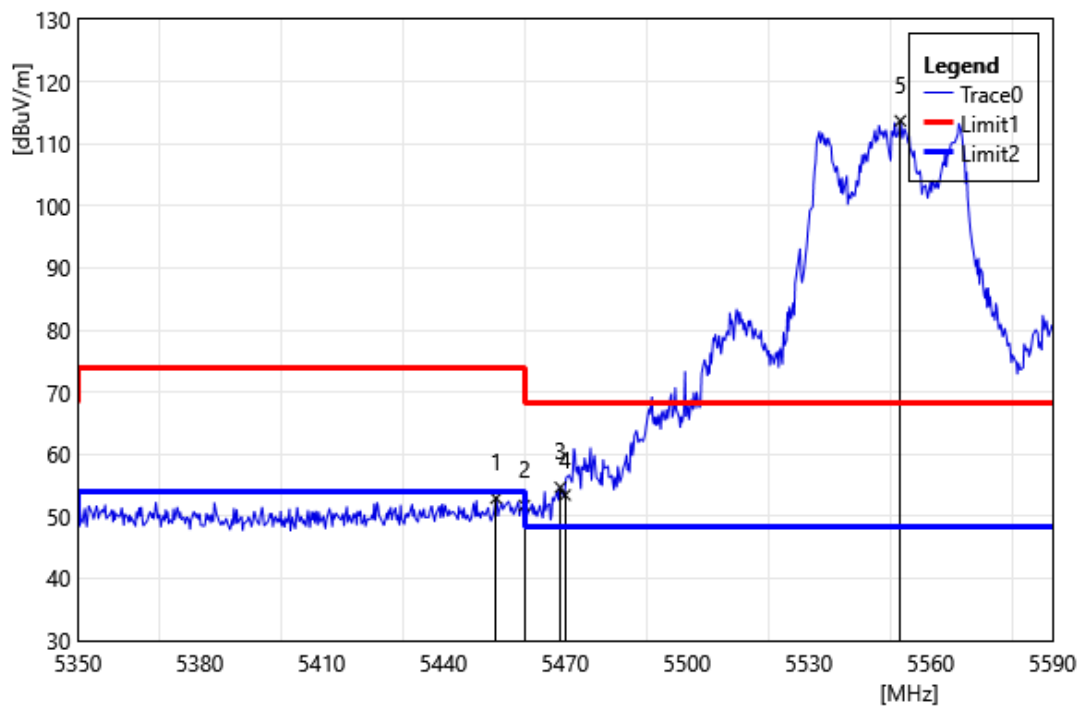


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.96	53.49	-0.58	52.91	74.00	-21.09	PEAK
2	5460.00	52.33	-0.57	51.76	74.00	-22.24	PEAK
3	5468.80	55.23	-0.56	54.67	68.20	-13.53	PEAK
4	5470.00	53.99	-0.56	53.43	68.20	-14.77	PEAK
5	5552.56	114.20	-0.50	113.70	68.20	45.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

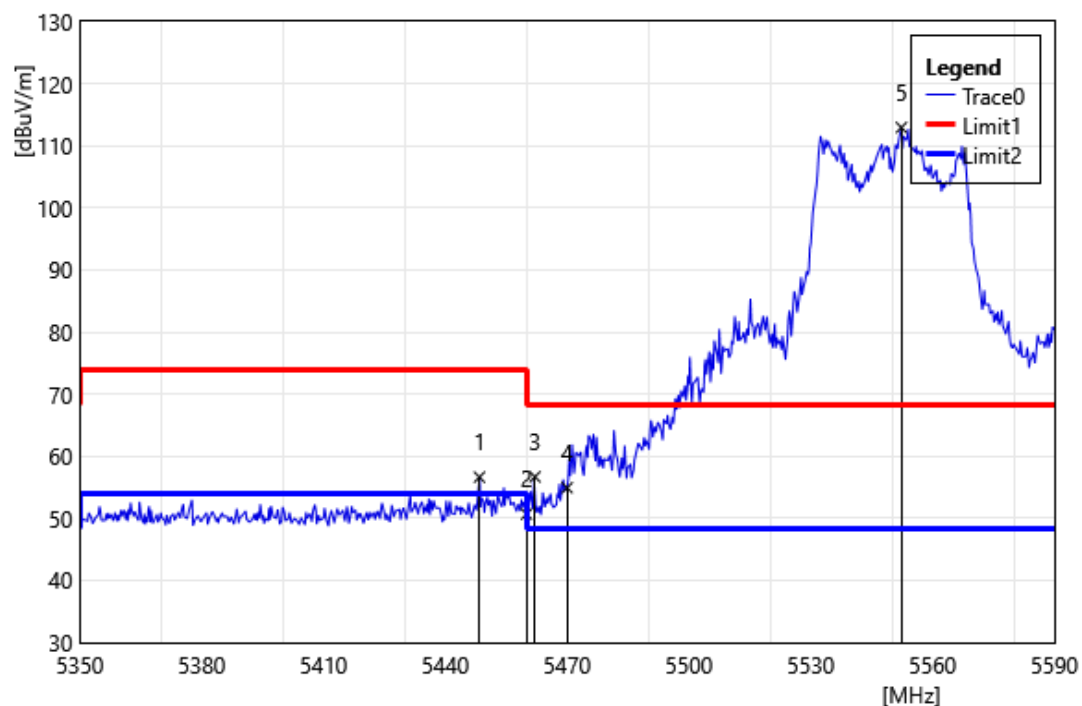


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.40	57.24	-0.60	56.64	74.00	-17.36	PEAK
2	5460.00	51.26	-0.57	50.69	74.00	-23.31	PEAK
3	5462.08	57.26	-0.57	56.69	68.20	-11.51	PEAK
4	5470.00	55.49	-0.56	54.93	68.20	-13.27	PEAK
5	5552.32	113.45	-0.50	112.95	68.20	44.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

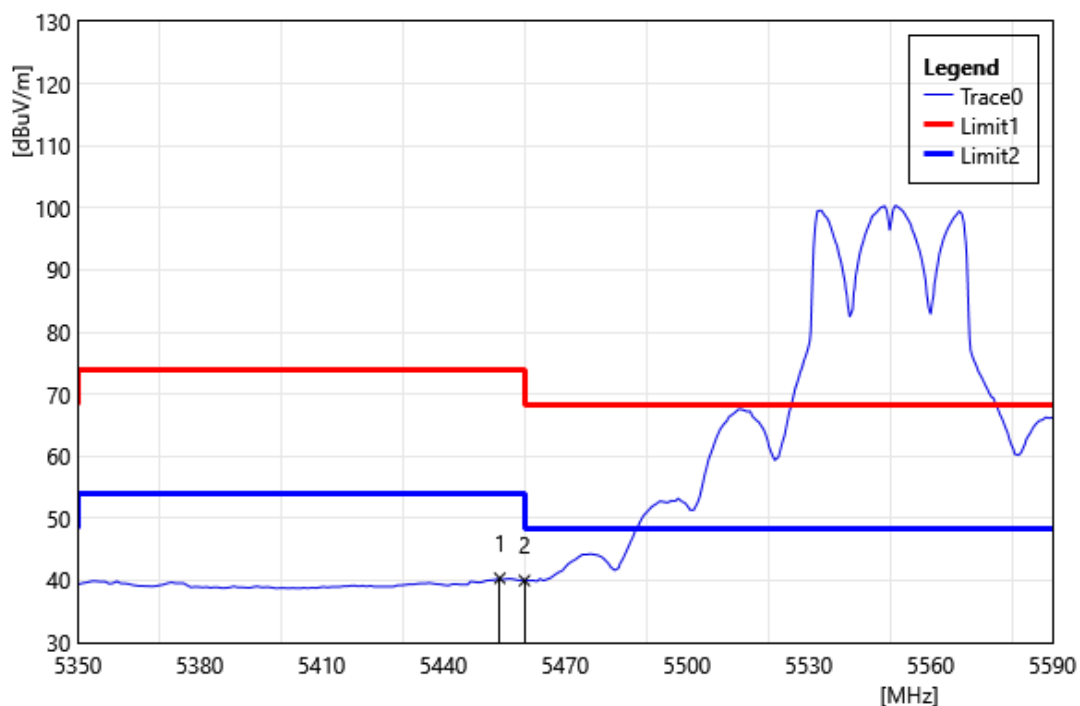


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.92	40.94	-0.58	40.36	54.00	-13.64	AVG
2	5460.00	40.55	-0.57	39.98	54.00	-14.02	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

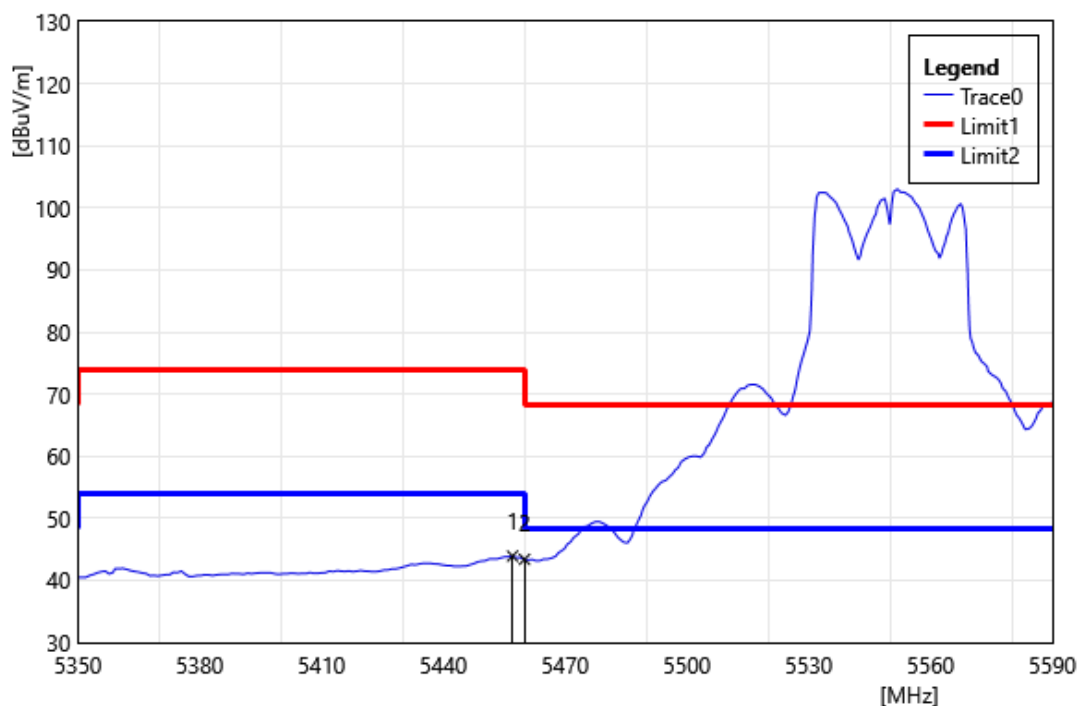


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.04	44.49	-0.58	43.91	54.00	-10.09	AVG
2	5460.00	43.96	-0.57	43.39	54.00	-10.61	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

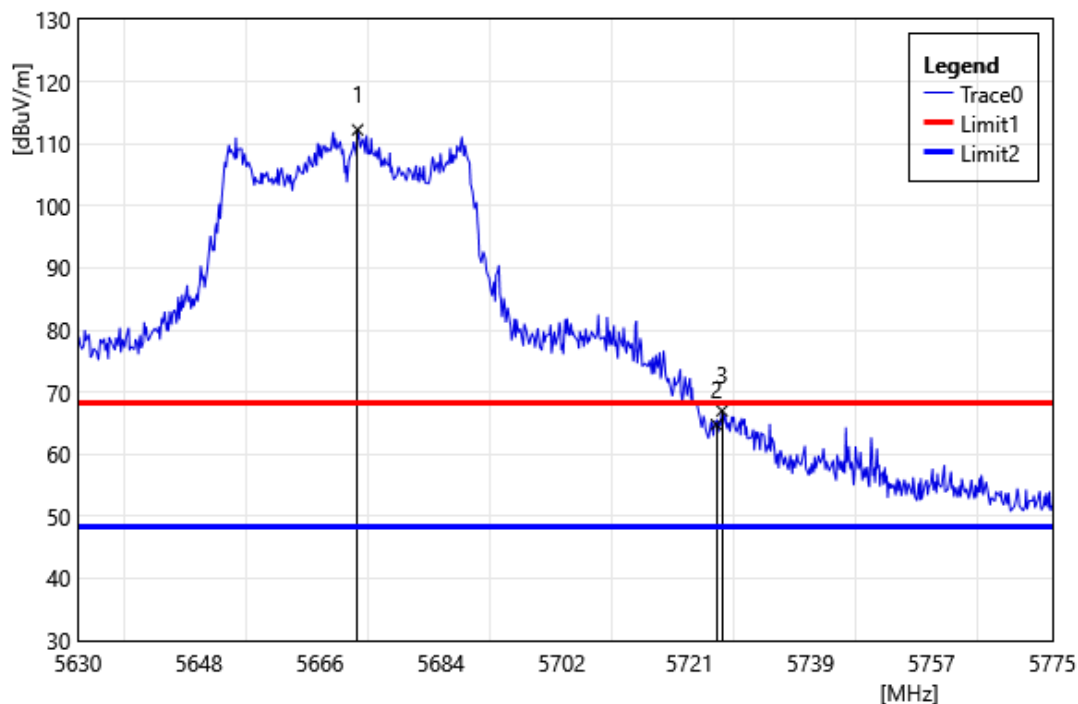


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5671.62	112.87	-0.63	112.24	68.20	44.04	PEAK
2	5725.00	65.12	-0.34	64.78	68.20	-3.42	PEAK
3	5725.85	67.32	-0.34	66.98	68.20	-1.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

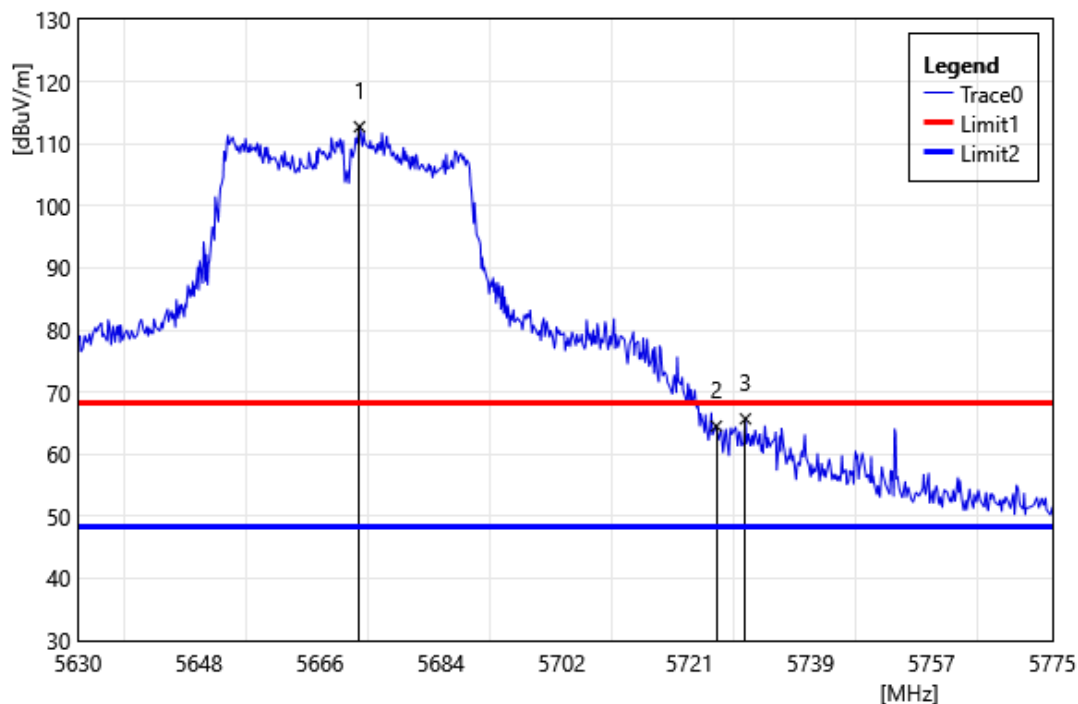


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5671.91	113.37	-0.63	112.74	68.20	44.54	PEAK
2	5725.00	64.87	-0.34	64.53	68.20	-3.67	PEAK
3	5729.33	66.00	-0.30	65.70	68.20	-2.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

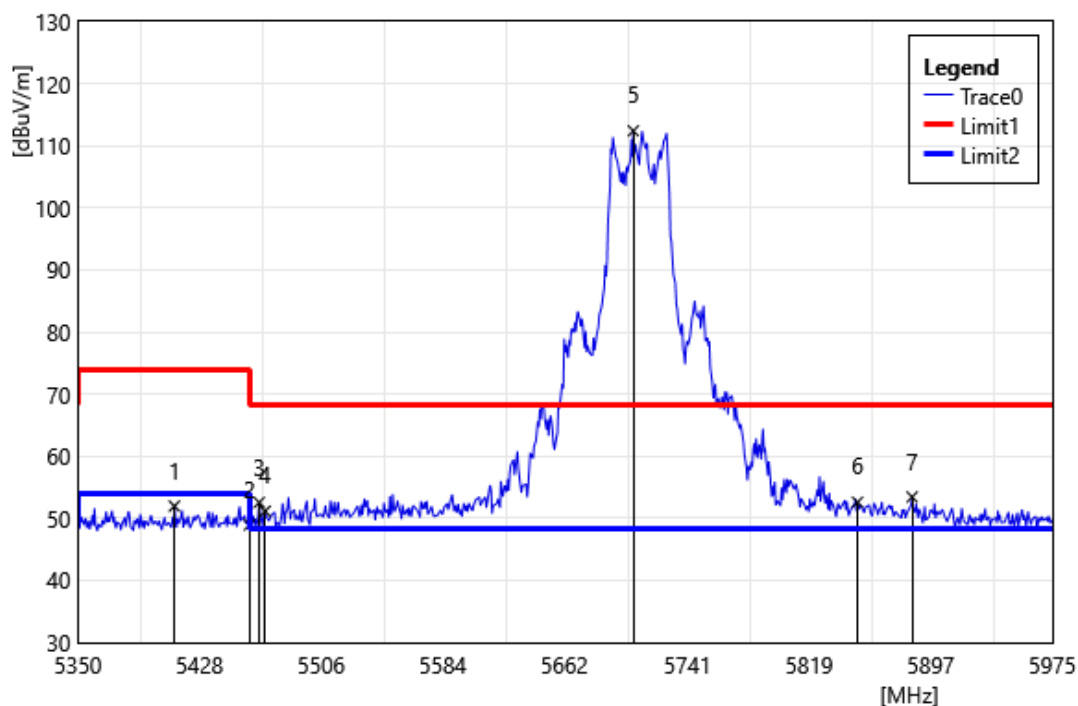


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5411.88	52.82	-0.85	51.97	74.00	-22.04	PEAK
2	5460.00	49.52	-0.57	48.95	74.00	-25.05	PEAK
3	5466.25	53.12	-0.57	52.55	68.20	-15.65	PEAK
4	5470.00	51.71	-0.56	51.15	68.20	-17.05	PEAK
5	5706.25	112.96	-0.54	112.42	68.20	44.22	PEAK
6	5850.00	52.31	0.28	52.59	68.20	-15.61	PEAK
7	5885.00	53.08	0.37	53.45	68.20	-14.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

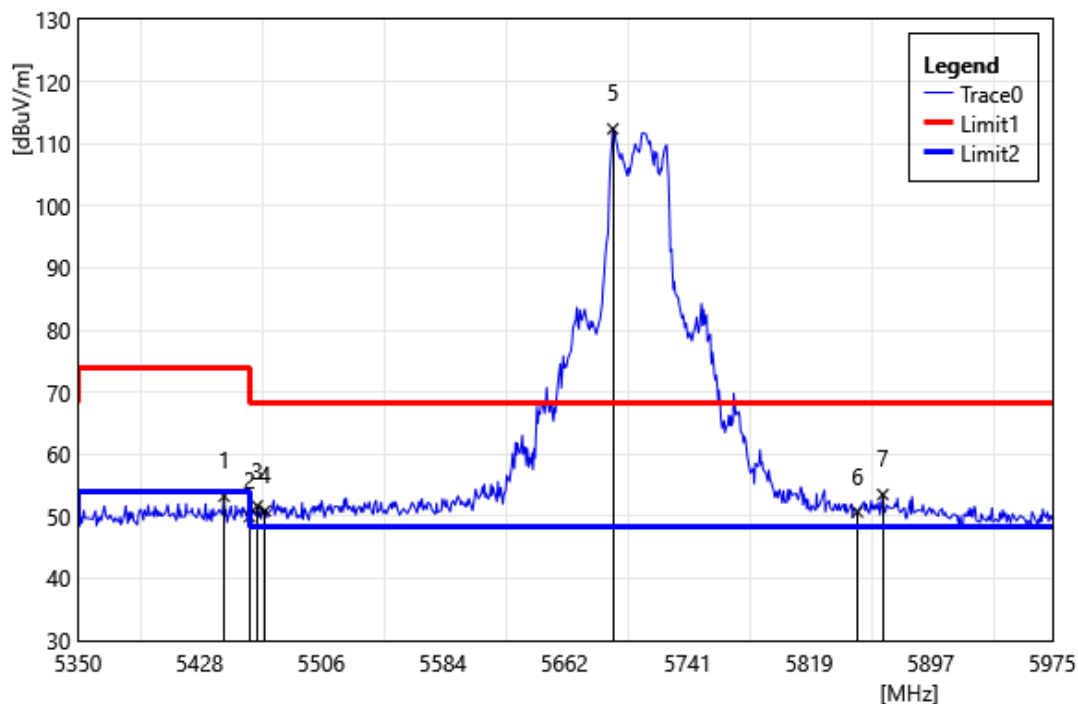


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5443.75	53.87	-0.63	53.24	74.00	-20.76	PEAK
2	5460.00	50.51	-0.57	49.94	74.00	-24.06	PEAK
3	5465.00	52.24	-0.57	51.67	68.20	-16.53	PEAK
4	5470.00	51.45	-0.56	50.89	68.20	-17.31	PEAK
5	5693.13	113.01	-0.61	112.40	68.20	44.20	PEAK
6	5850.00	50.43	0.28	50.71	68.20	-17.49	PEAK
7	5866.25	53.19	0.32	53.51	68.20	-14.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

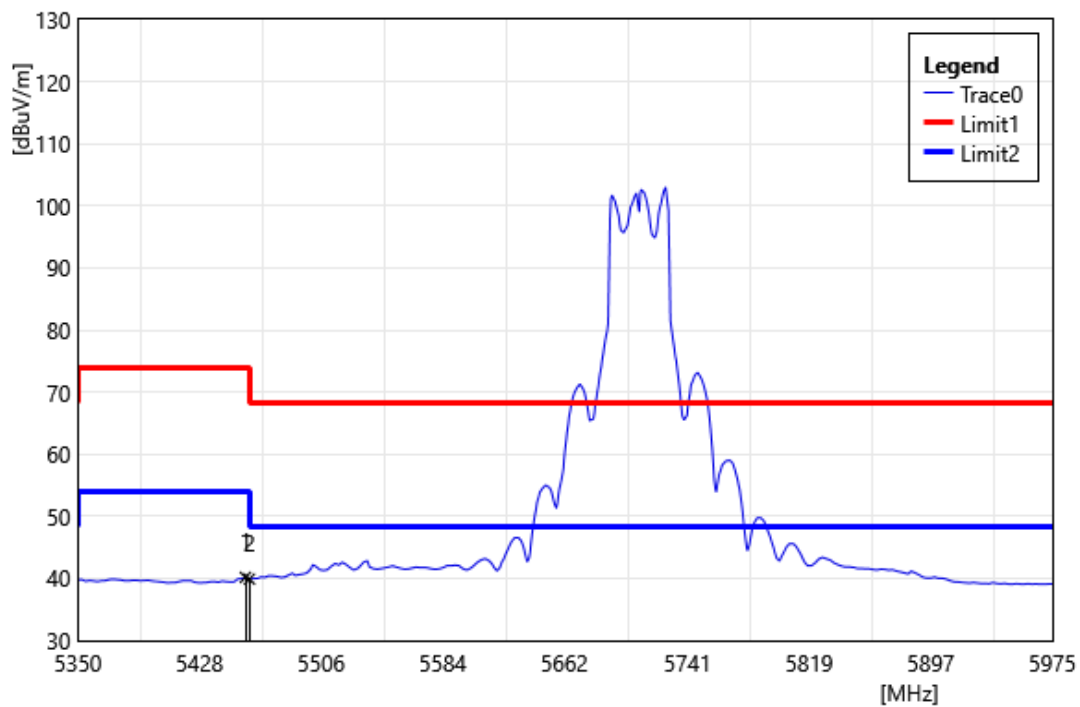


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.50	40.76	-0.58	40.18	54.00	-13.82	AVG
2	5460.00	40.48	-0.57	39.91	54.00	-14.09	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

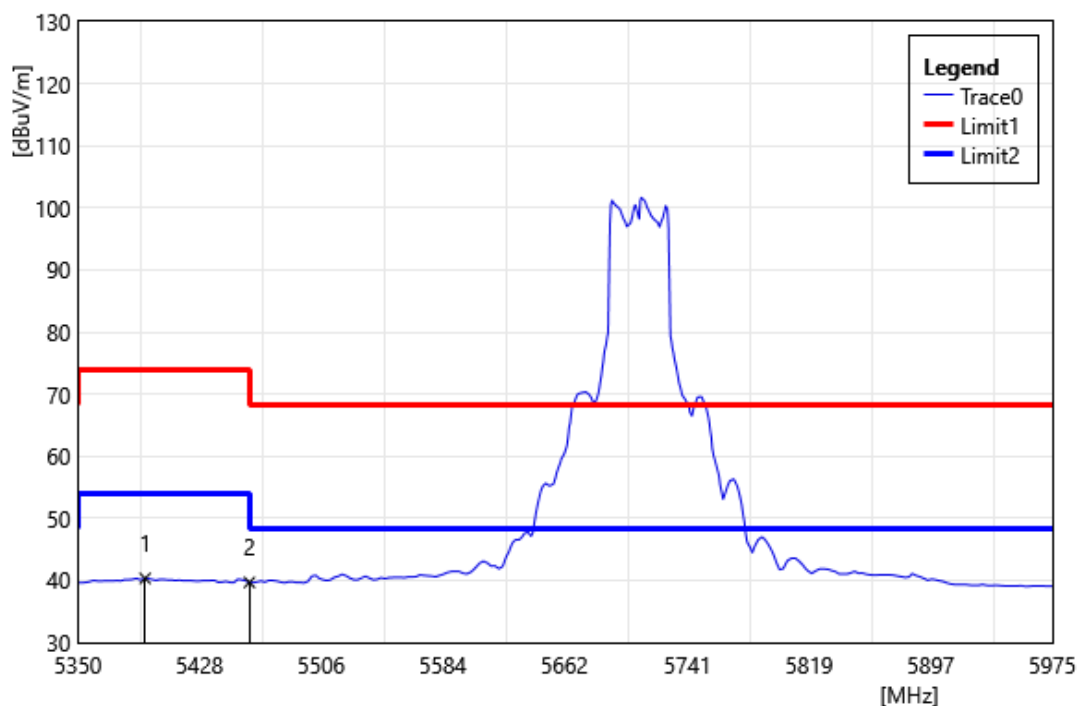


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5393.13	41.32	-0.99	40.33	54.00	-13.67	AVG
2	5460.00	40.25	-0.57	39.68	54.00	-14.32	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

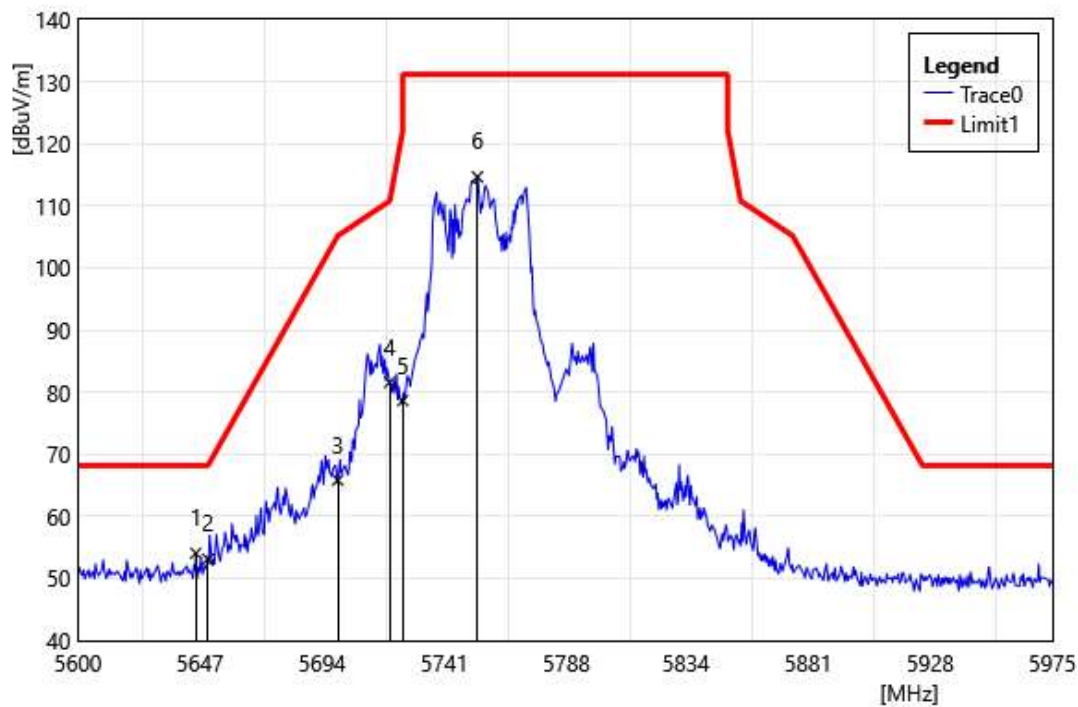


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5645.38	54.69	-0.63	54.06	68.20	-14.14	PEAK
2	5650.00	53.75	-0.64	53.11	68.20	-15.09	PEAK
3	5700.00	66.44	-0.61	65.83	105.20	-39.37	PEAK
4	5720.00	81.97	-0.40	81.57	110.80	-29.23	PEAK
5	5725.00	78.97	-0.34	78.63	122.20	-43.57	PEAK
6	5753.75	114.73	-0.06	114.67	131.20	-16.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

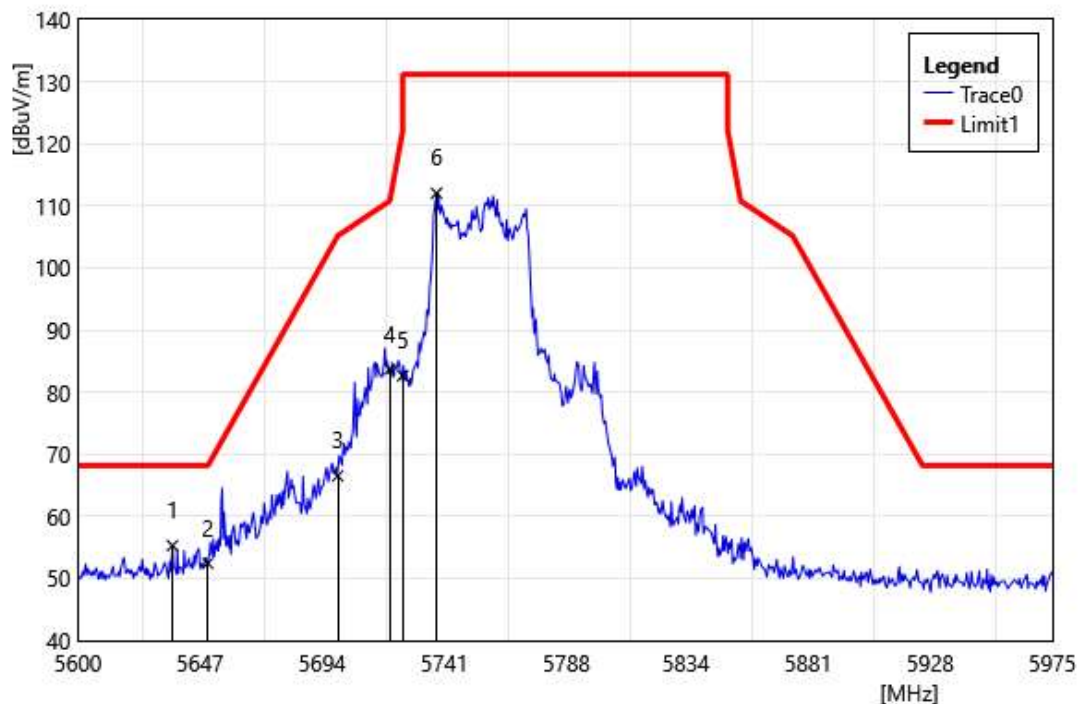


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5636.38	55.90	-0.62	55.28	68.20	-12.92	PEAK
2	5650.00	53.07	-0.64	52.43	68.20	-15.77	PEAK
3	5700.00	67.14	-0.61	66.53	105.20	-38.67	PEAK
4	5720.00	84.09	-0.40	83.69	110.80	-27.11	PEAK
5	5725.00	83.00	-0.34	82.66	122.20	-39.54	PEAK
6	5738.00	112.26	-0.21	112.05	131.20	-19.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

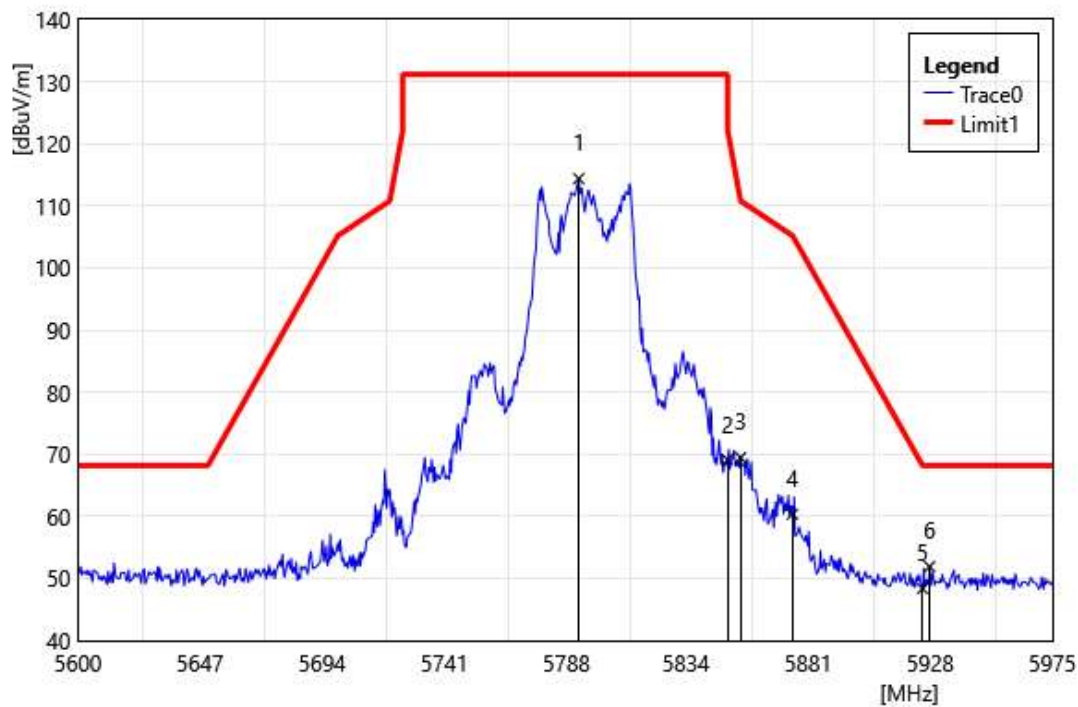


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5792.75	114.26	0.12	114.38	131.20	-16.82	PEAK
2	5850.00	68.83	0.28	69.11	122.20	-53.09	PEAK
3	5855.00	69.19	0.29	69.48	110.80	-41.32	PEAK
4	5875.00	60.02	0.34	60.36	105.20	-44.84	PEAK
5	5925.00	48.11	0.28	48.39	68.20	-19.81	PEAK
6	5927.75	51.65	0.26	51.91	68.20	-16.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

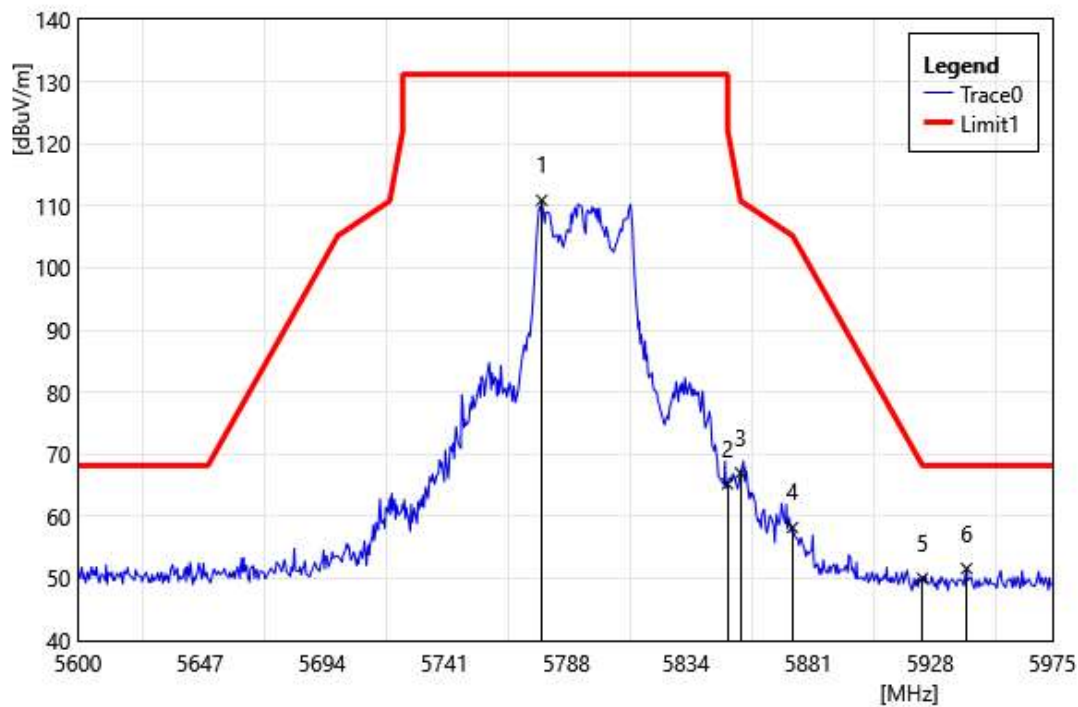


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5778.50	110.85	0.05	110.90	131.20	-20.30	PEAK
2	5850.00	64.96	0.28	65.24	122.20	-56.96	PEAK
3	5855.00	66.69	0.29	66.98	110.80	-43.82	PEAK
4	5875.00	57.86	0.34	58.20	105.20	-47.00	PEAK
5	5925.00	49.72	0.28	50.00	68.20	-18.21	PEAK
6	5942.00	51.40	0.18	51.58	68.20	-16.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

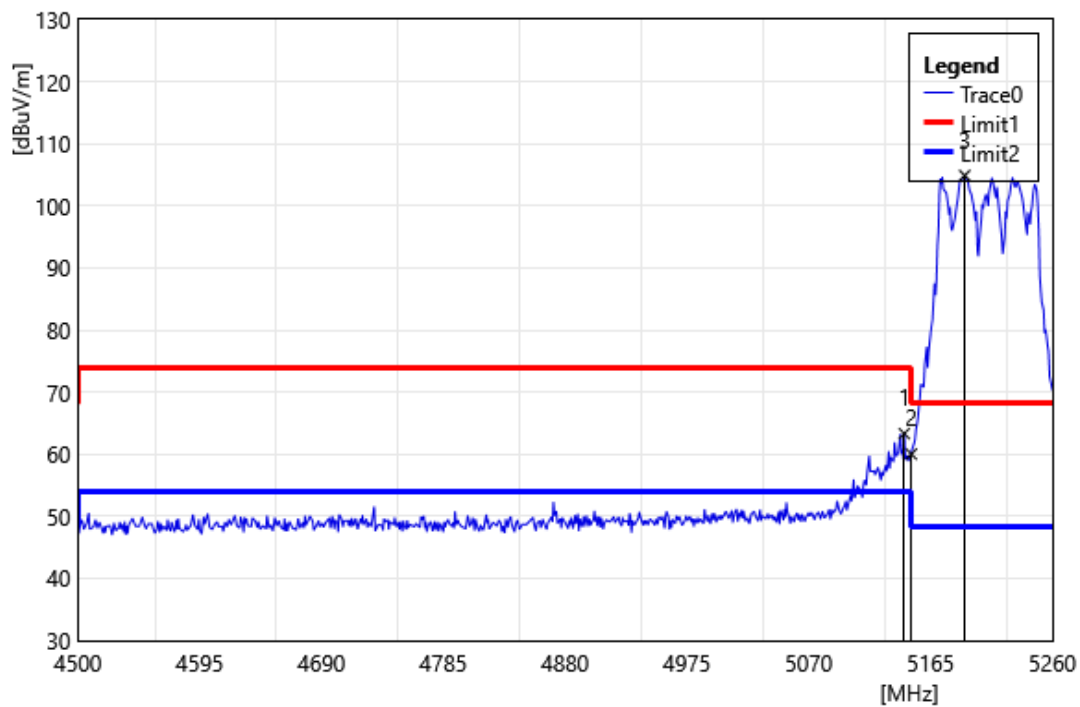


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	64.22	-0.90	63.32	74.00	-10.69	PEAK
2	5150.00	60.94	-0.91	60.03	74.00	-13.97	PEAK
3	5191.60	106.00	-1.11	104.89	68.20	36.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

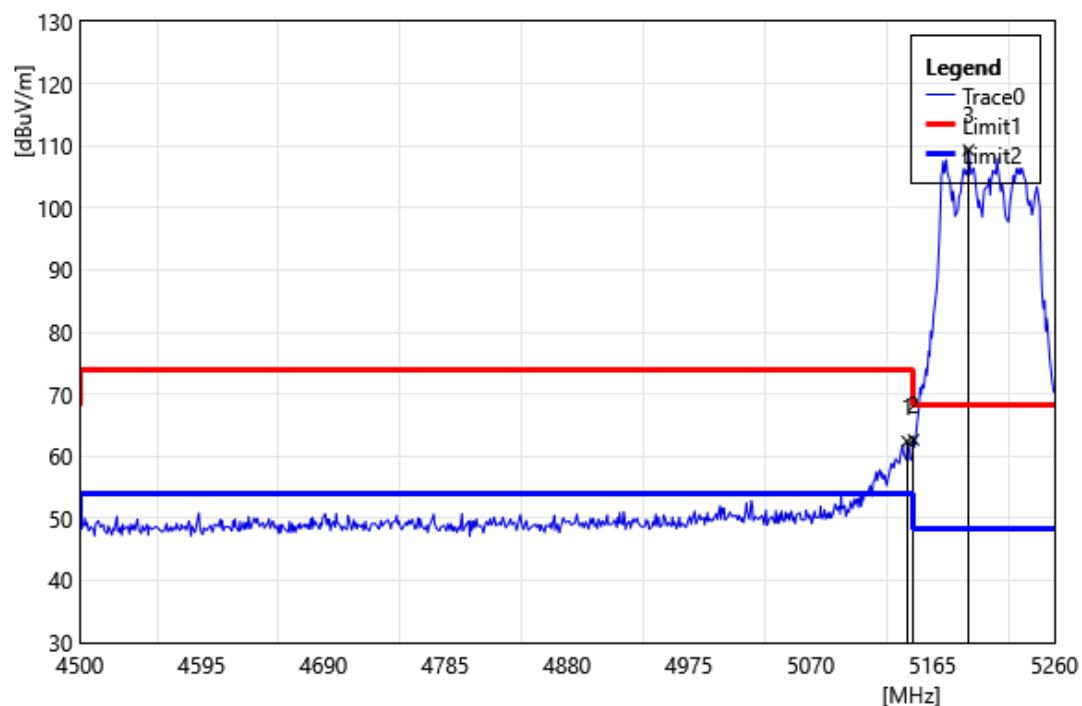


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	63.29	-0.90	62.39	74.00	-11.61	PEAK
2	5150.00	63.55	-0.91	62.64	74.00	-11.36	PEAK
3	5193.12	110.44	-1.12	109.32	68.20	41.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

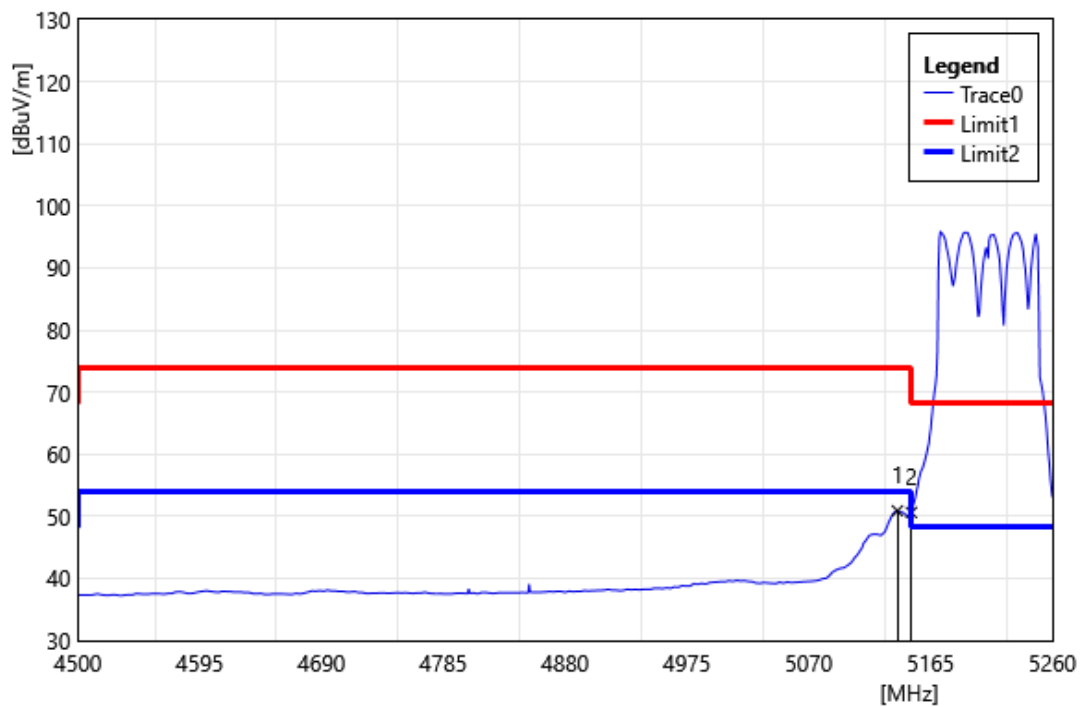


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.16	51.80	-0.90	50.90	54.00	-3.10	AVG
2	5150.00	51.53	-0.91	50.62	54.00	-3.38	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

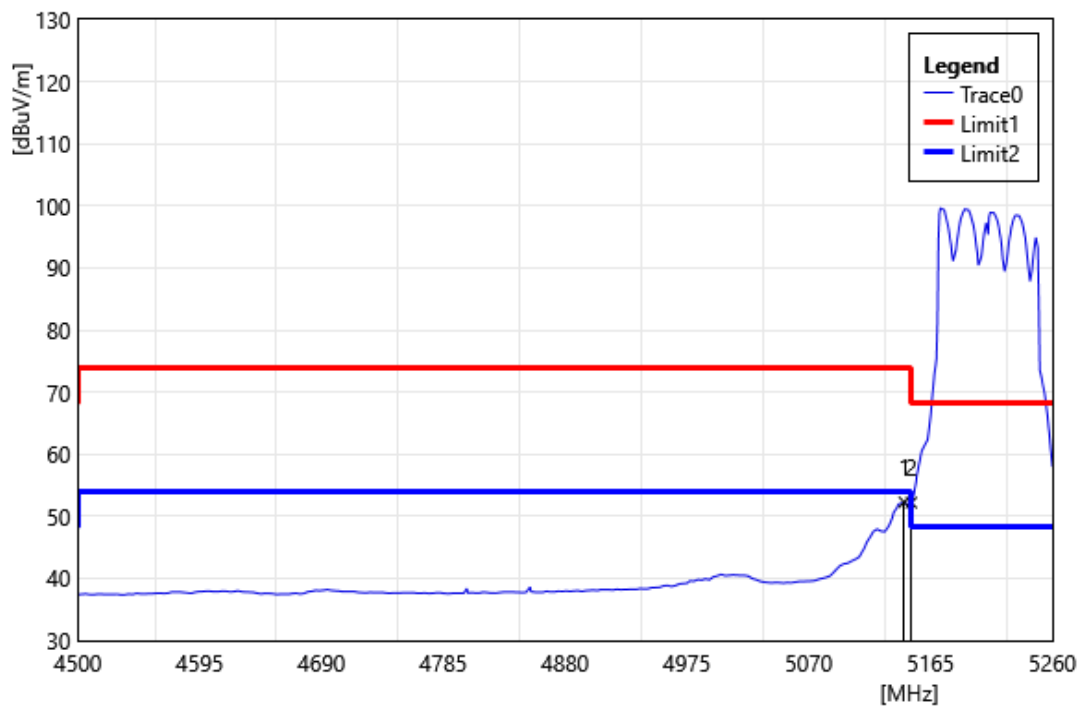


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	53.17	-0.90	52.27	54.00	-1.73	AVG
2	5150.00	53.12	-0.91	52.21	54.00	-1.79	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

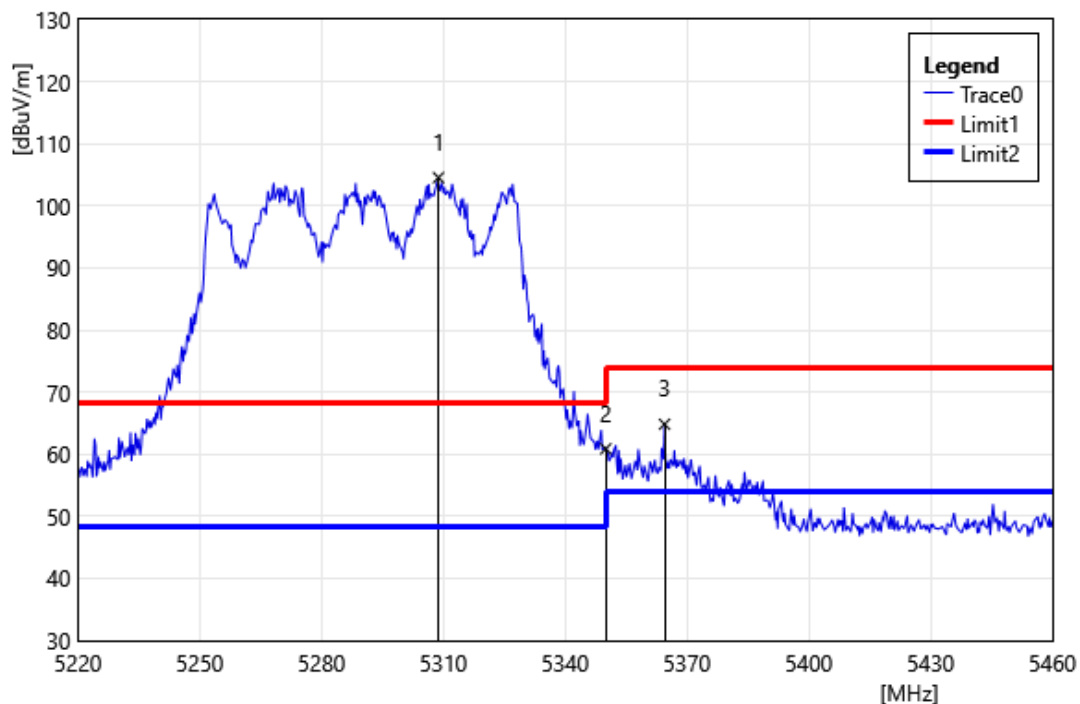


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5308.80	106.13	-1.58	104.55	68.20	36.35	PEAK
2	5350.00	62.16	-1.29	60.87	74.00	-13.13	PEAK
3	5364.48	66.02	-1.19	64.83	74.00	-9.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

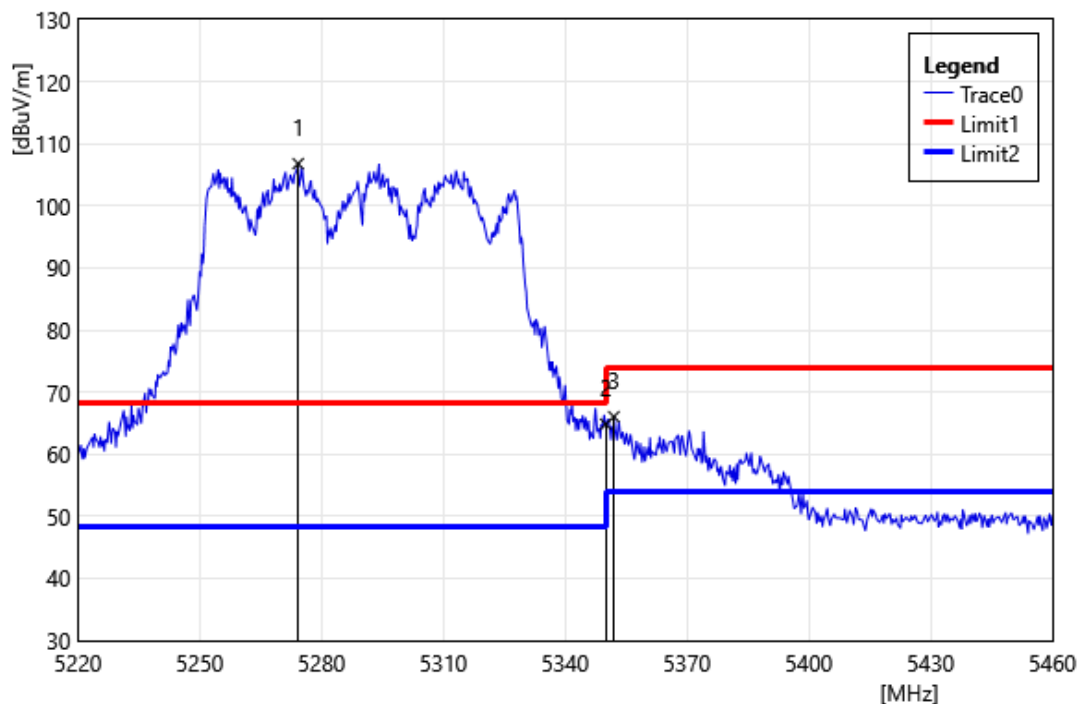


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5274.24	108.37	-1.57	106.80	68.20	38.60	PEAK
2	5350.00	66.16	-1.29	64.87	74.00	-9.13	PEAK
3	5352.00	67.33	-1.28	66.05	74.00	-7.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

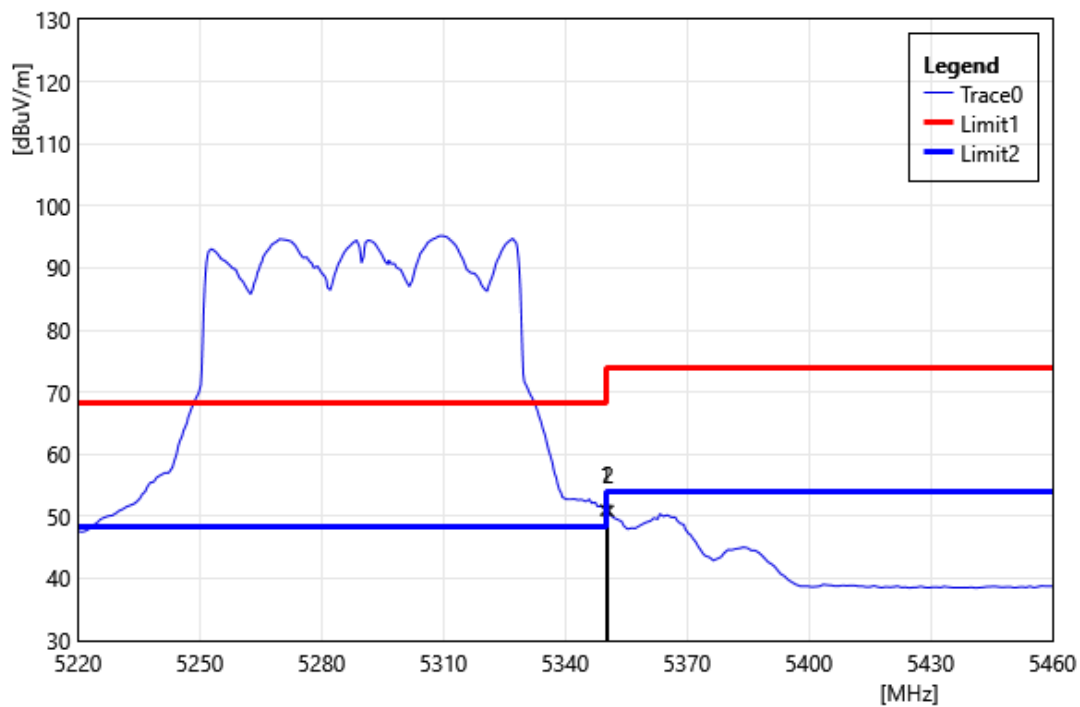


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	52.30	-1.29	51.01	54.00	-2.99	AVG
2	5350.56	52.18	-1.29	50.89	54.00	-3.11	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

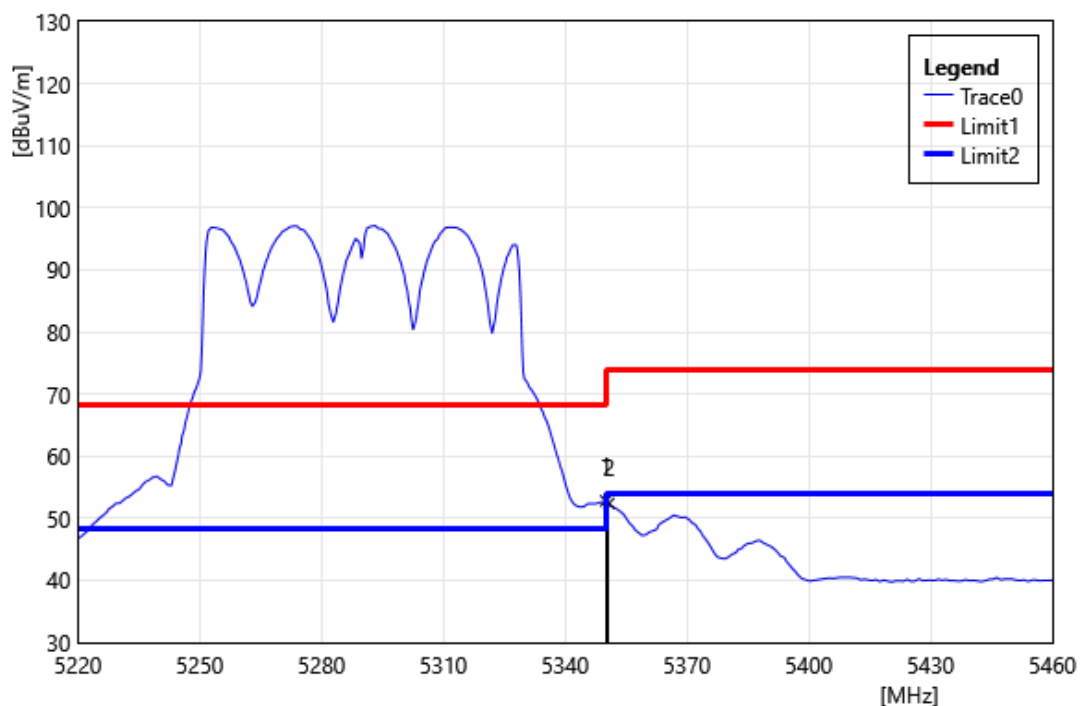


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	54.12	-1.29	52.82	54.00	-1.18	AVG
2	5350.80	53.71	-1.29	52.42	54.00	-1.58	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

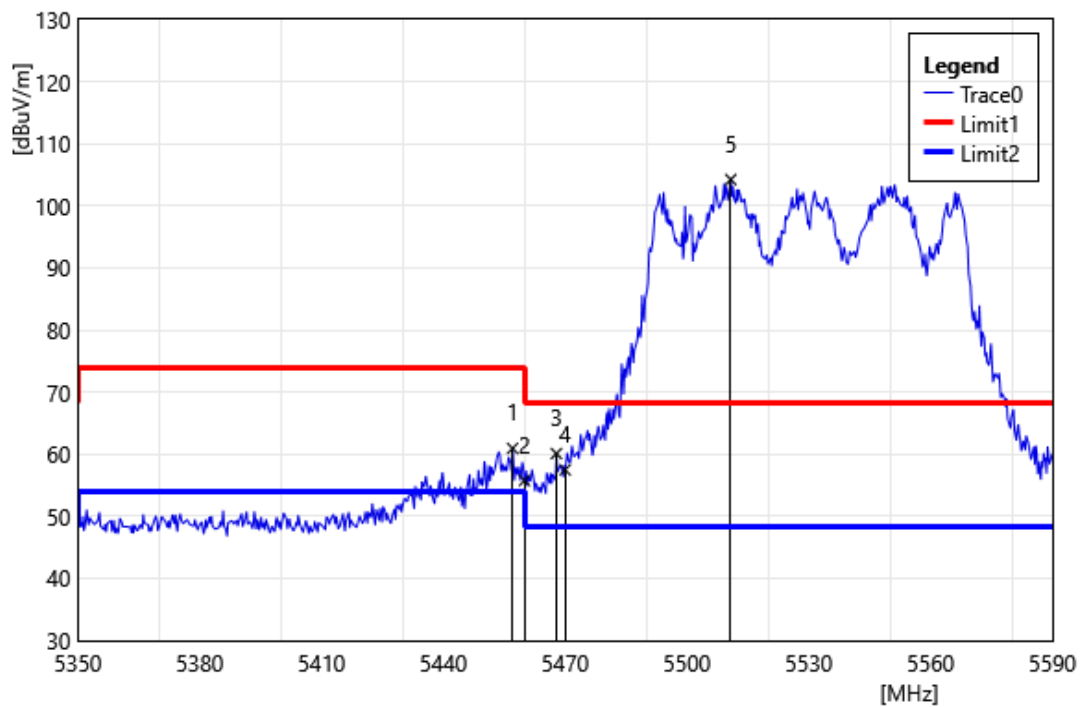


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.04	61.52	-0.58	60.95	74.00	-13.06	PEAK
2	5460.00	56.35	-0.57	55.78	74.00	-18.22	PEAK
3	5467.84	60.67	-0.56	60.11	68.20	-8.09	PEAK
4	5470.00	58.05	-0.56	57.49	68.20	-10.71	PEAK
5	5510.80	104.76	-0.52	104.24	68.20	36.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

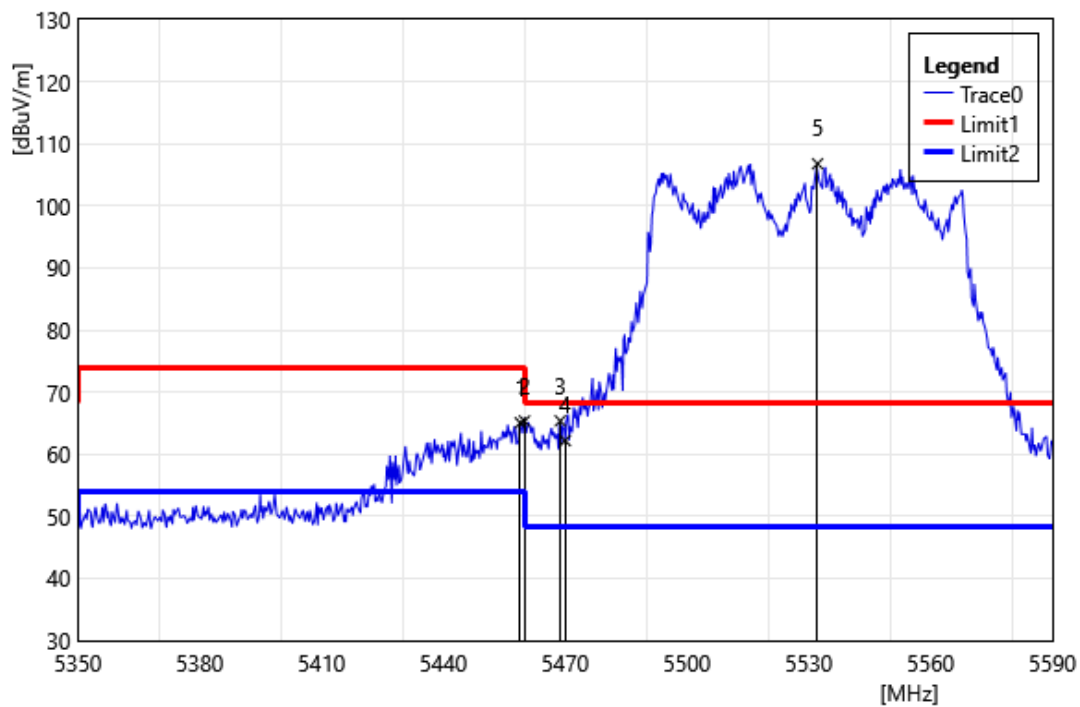


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	65.64	-0.57	65.07	74.00	-8.93	PEAK
2	5460.00	65.92	-0.57	65.35	74.00	-8.65	PEAK
3	5468.80	65.94	-0.56	65.38	68.20	-2.82	PEAK
4	5470.00	62.75	-0.56	62.19	68.20	-6.01	PEAK
5	5532.16	107.29	-0.51	106.78	68.20	38.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

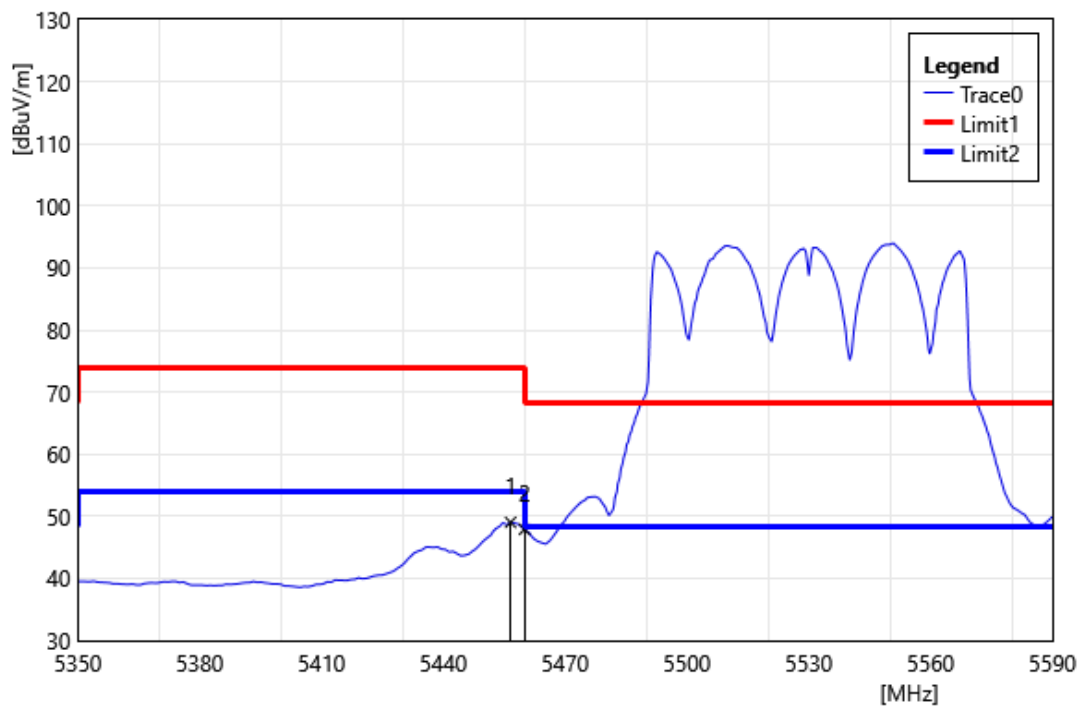


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.56	49.61	-0.58	49.03	54.00	-4.97	AVG
2	5460.00	48.49	-0.57	47.92	54.00	-6.08	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

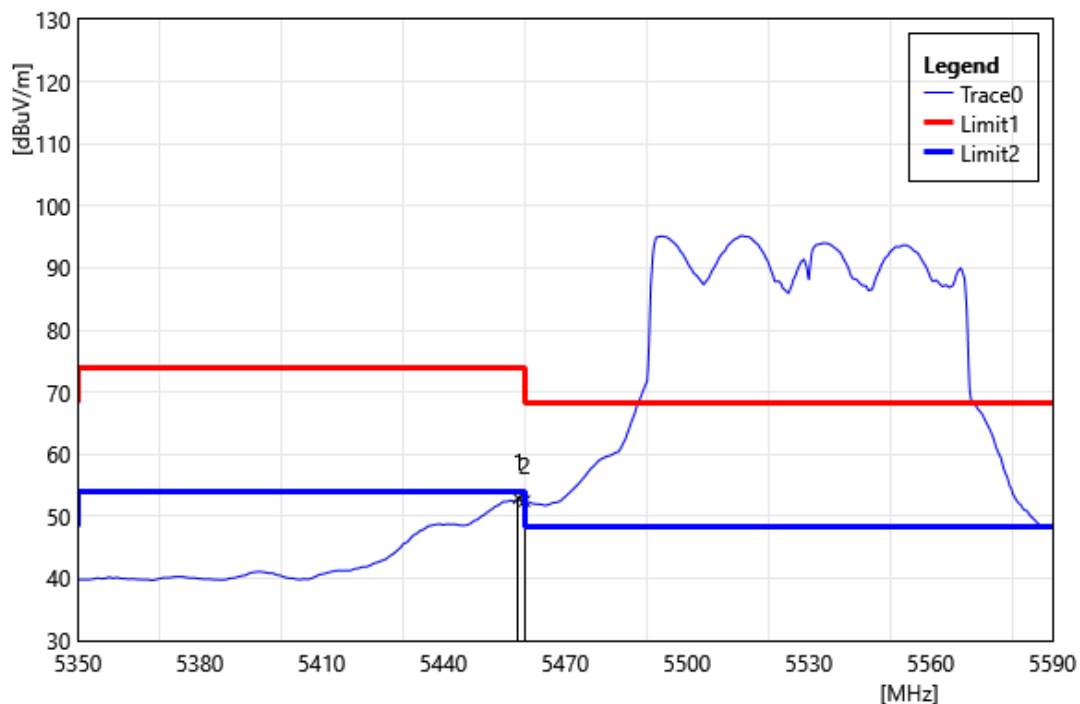


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.48	53.46	-0.57	52.90	54.00	-1.11	AVG
2	5460.00	53.04	-0.57	52.47	54.00	-1.53	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

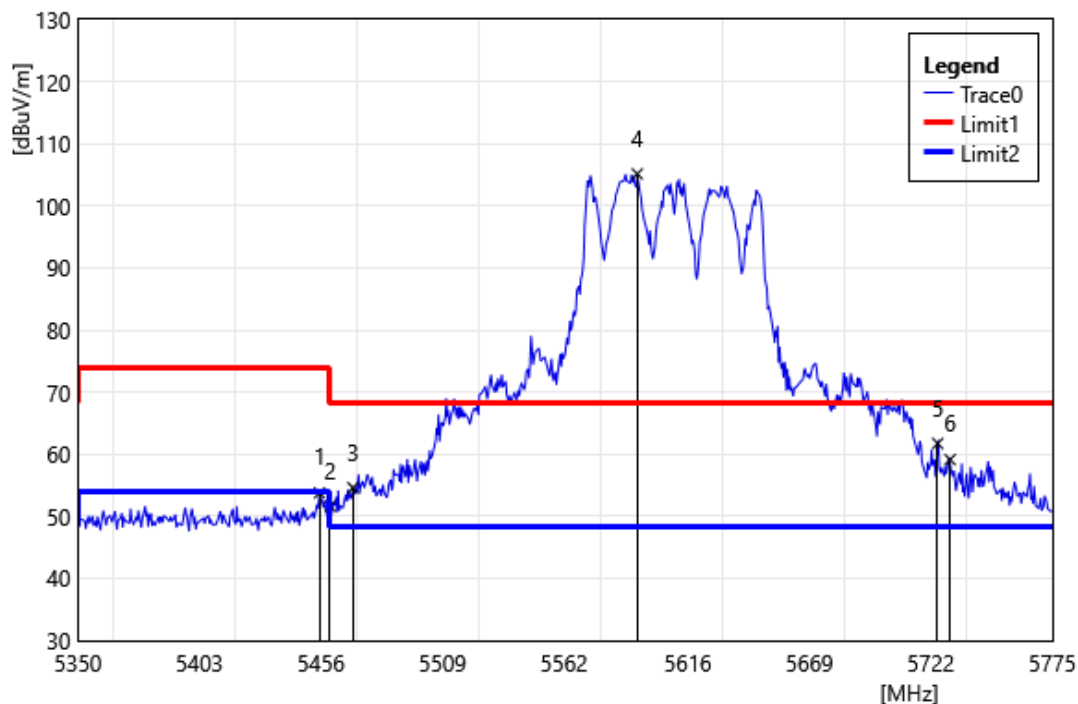


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.40	54.36	-0.58	53.78	74.00	-20.22	PEAK
2	5460.00	52.21	-0.57	51.64	74.00	-22.36	PEAK
3	5470.00	55.17	-0.56	54.61	68.20	-13.59	PEAK
4	5593.95	105.72	-0.56	105.17	68.20	36.97	PEAK
5	5725.00	62.07	-0.34	61.73	68.20	-6.47	PEAK
6	5730.38	59.44	-0.29	59.15	68.20	-9.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

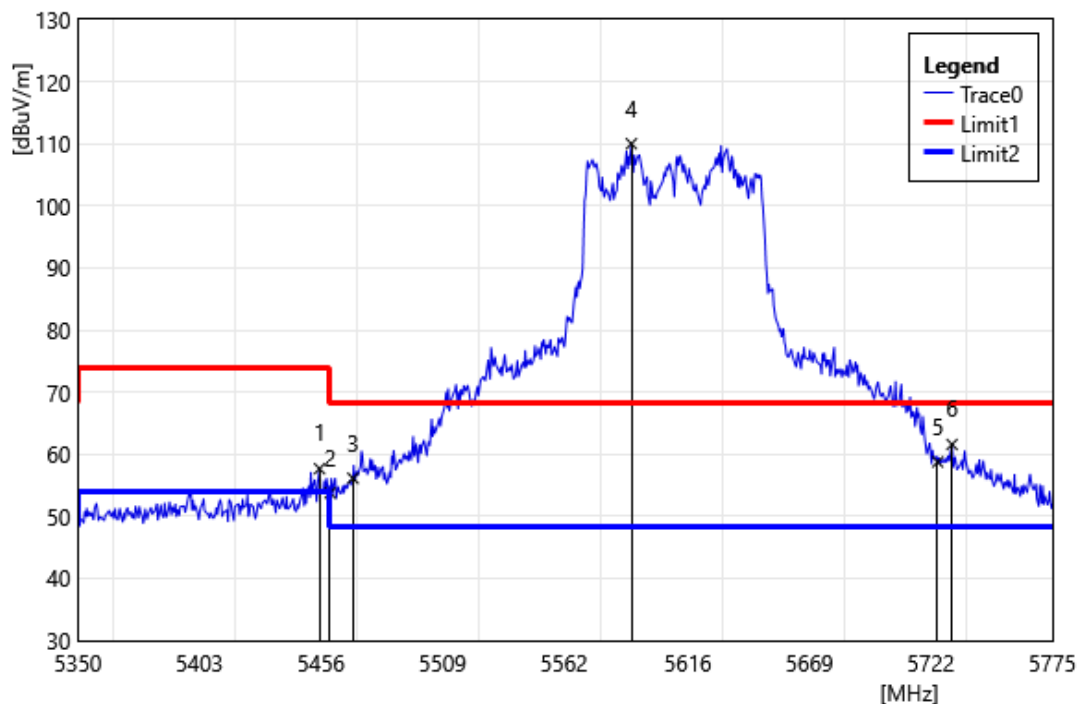


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.40	58.26	-0.58	57.68	74.00	-16.32	PEAK
2	5460.00	54.33	-0.57	53.76	74.00	-20.24	PEAK
3	5470.00	56.69	-0.56	56.13	68.20	-12.07	PEAK
4	5591.40	110.57	-0.56	110.01	68.20	41.81	PEAK
5	5725.00	59.11	-0.34	58.77	68.20	-9.43	PEAK
6	5731.23	61.86	-0.28	61.58	68.20	-6.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

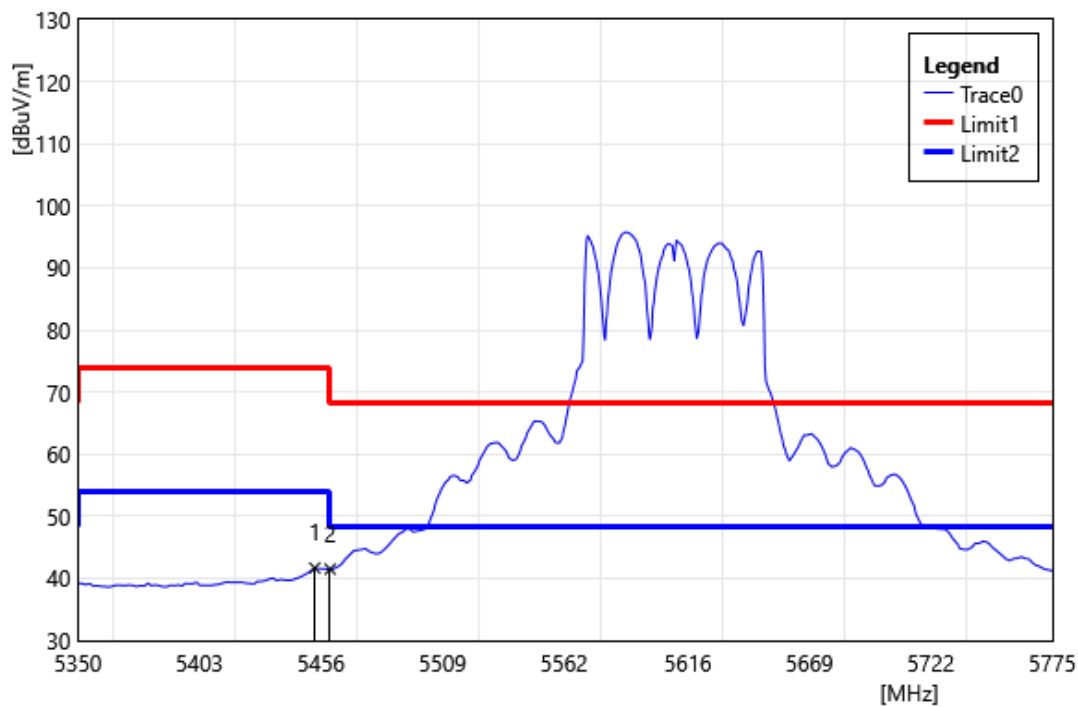


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.28	42.26	-0.58	41.69	54.00	-12.32	AVG
2	5460.00	42.07	-0.57	41.50	54.00	-12.50	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

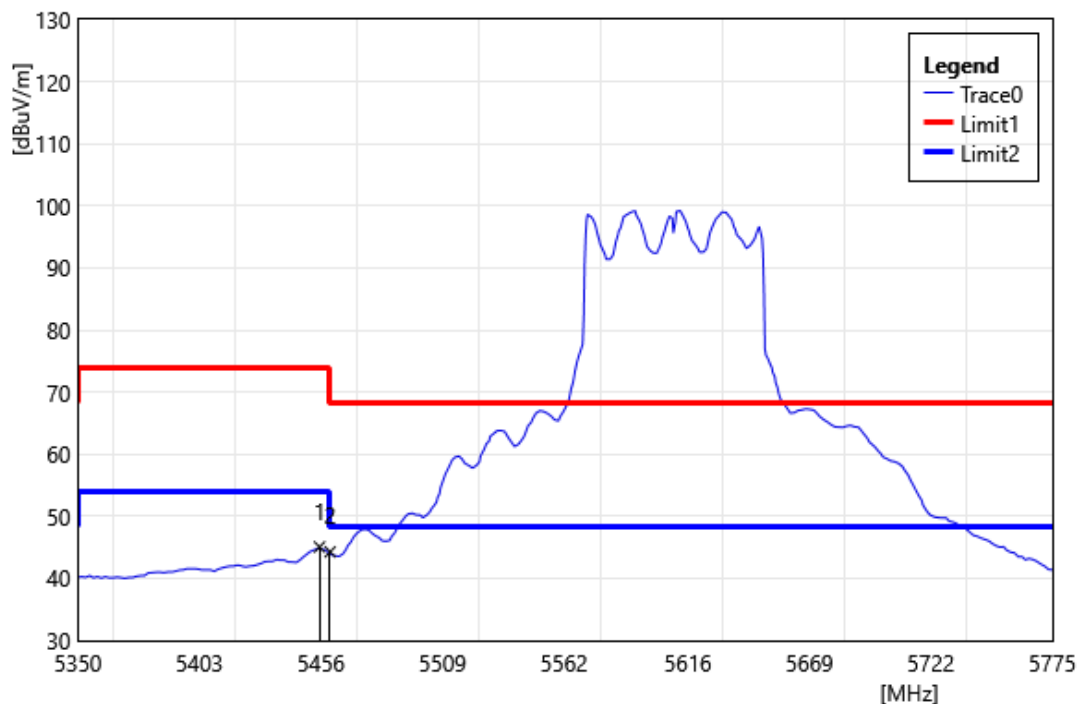


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.40	45.66	-0.58	45.08	54.00	-8.92	AVG
2	5460.00	44.85	-0.57	44.28	54.00	-9.72	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

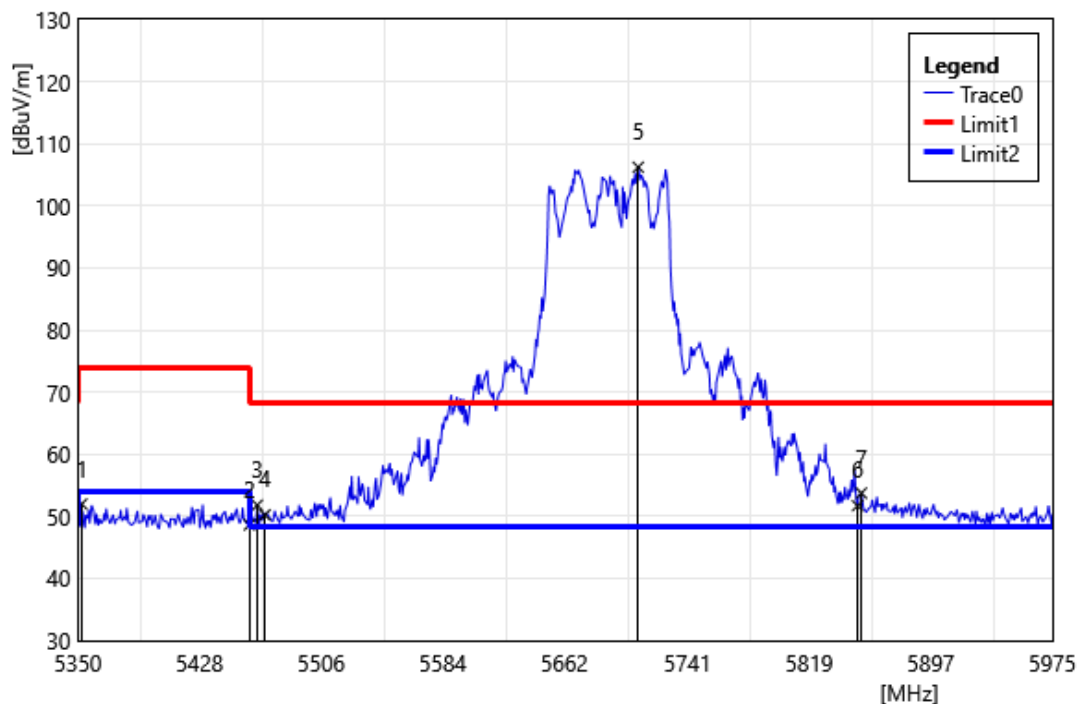


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5352.50	53.24	-1.27	51.97	74.00	-22.03	PEAK
2	5460.00	49.21	-0.57	48.64	74.00	-25.36	PEAK
3	5465.00	52.38	-0.57	51.81	68.20	-16.39	PEAK
4	5470.00	50.80	-0.56	50.24	68.20	-17.96	PEAK
5	5709.38	106.75	-0.51	106.24	68.20	38.04	PEAK
6	5850.00	51.43	0.28	51.71	68.20	-16.49	PEAK
7	5852.50	53.45	0.29	53.74	68.20	-14.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

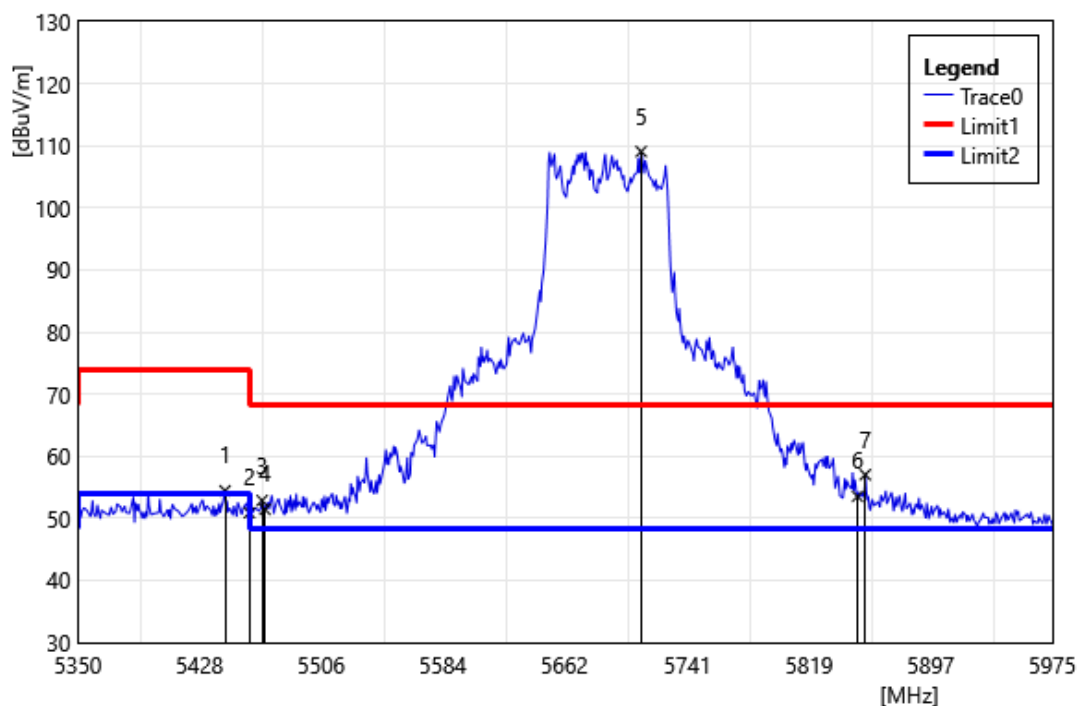


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5444.38	55.06	-0.62	54.44	74.00	-19.56	PEAK
2	5460.00	51.46	-0.57	50.89	74.00	-23.11	PEAK
3	5468.13	53.44	-0.56	52.88	68.20	-15.32	PEAK
4	5470.00	52.00	-0.56	51.44	68.20	-16.76	PEAK
5	5711.25	109.57	-0.49	109.08	68.20	40.88	PEAK
6	5850.00	53.26	0.28	53.54	68.20	-14.66	PEAK
7	5855.00	56.74	0.29	57.03	68.20	-11.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

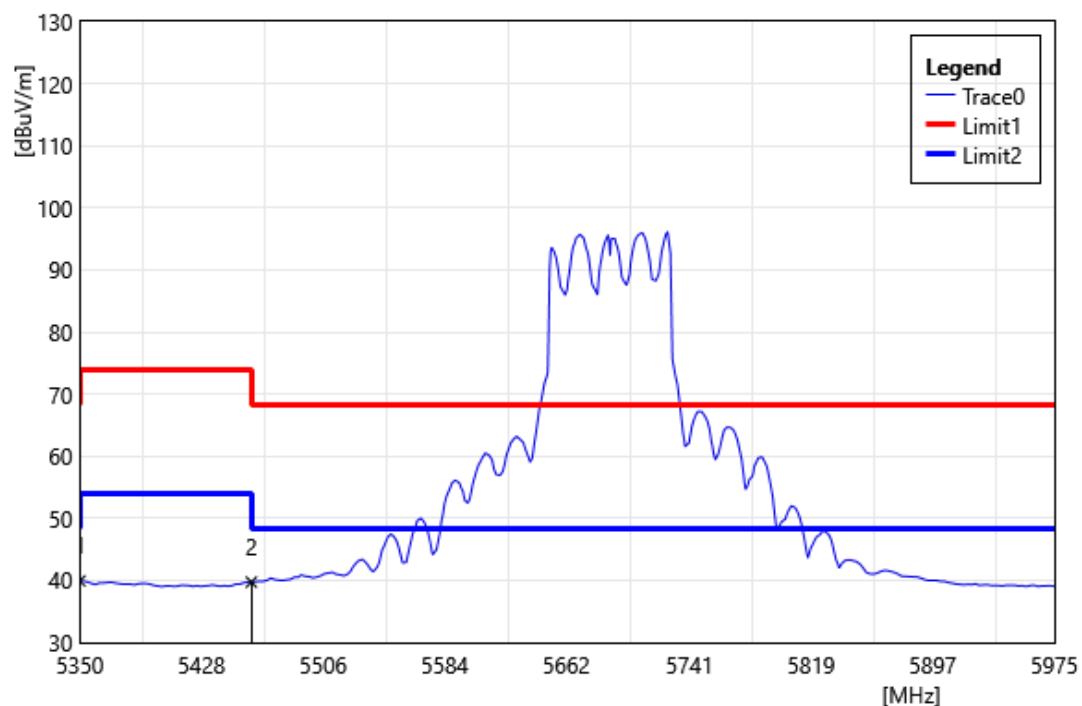


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.21	-1.29	39.92	54.00	-14.08	AVG
2	5460.00	40.30	-0.57	39.73	54.00	-14.27	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

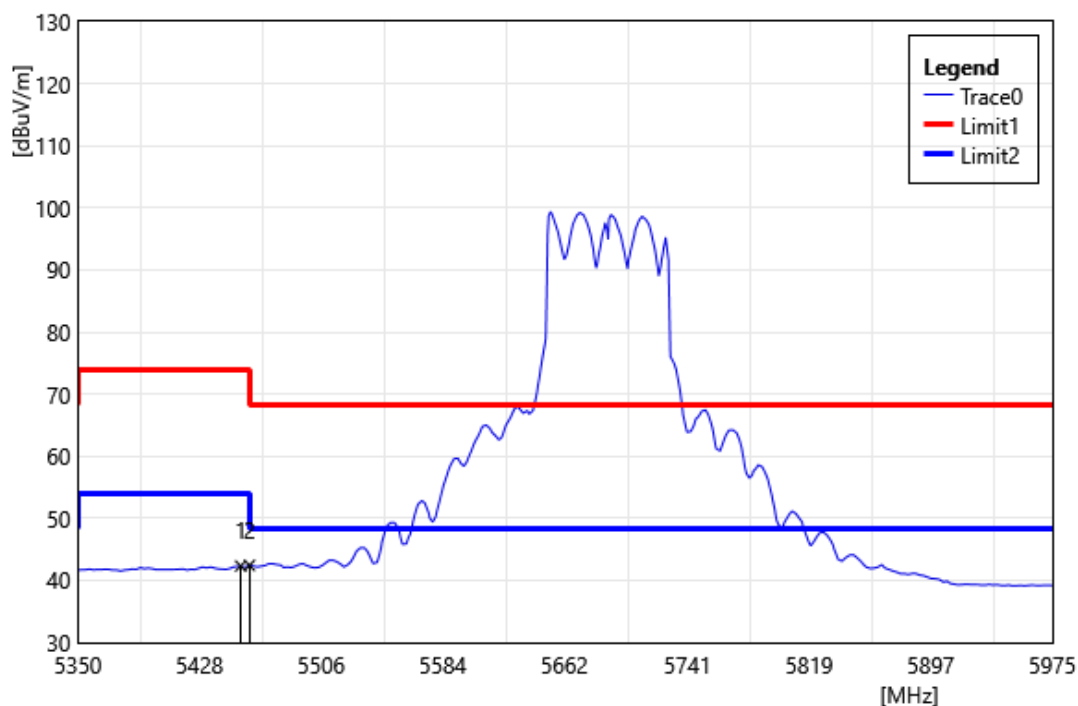


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.38	42.90	-0.58	42.32	54.00	-11.68	AVG
2	5460.00	43.00	-0.57	42.43	54.00	-11.57	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

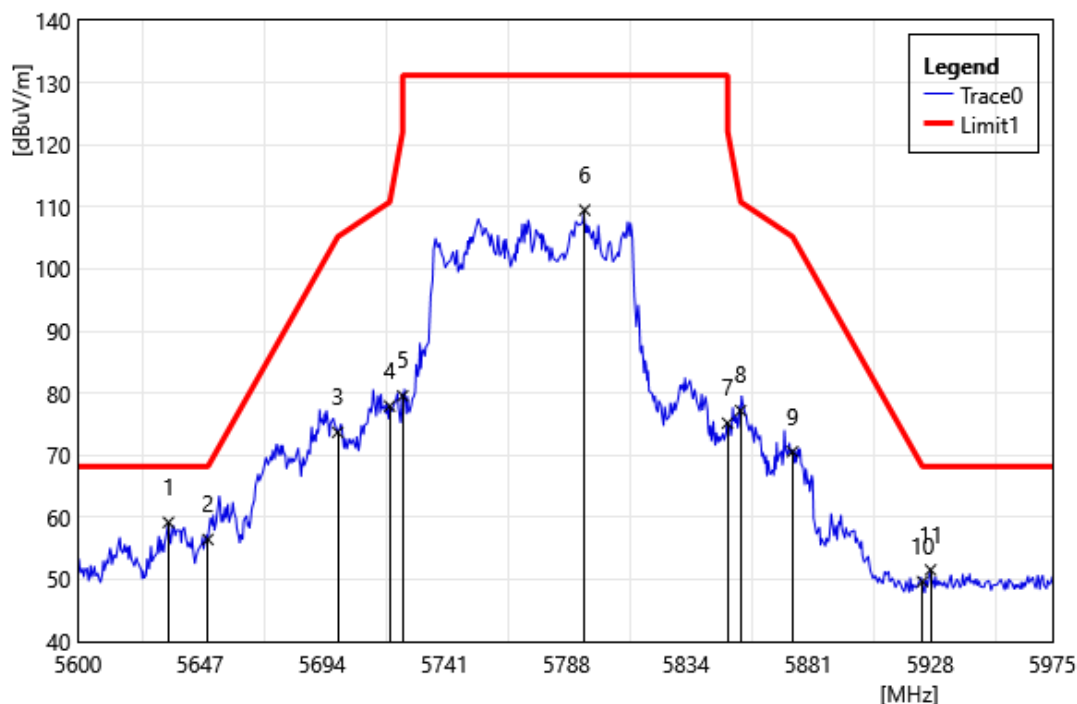


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5634.88	59.80	-0.62	59.18	68.20	-9.02	PEAK
2	5650.00	57.08	-0.64	56.44	68.20	-11.76	PEAK
3	5700.00	74.30	-0.61	73.69	105.20	-31.51	PEAK
4	5720.00	78.31	-0.40	77.91	110.80	-32.89	PEAK
5	5725.00	79.90	-0.34	79.56	122.20	-42.64	PEAK
6	5795.00	109.36	0.13	109.49	131.20	-21.71	PEAK
7	5850.00	74.88	0.28	75.16	122.20	-47.04	PEAK
8	5855.00	76.90	0.29	77.19	110.80	-33.61	PEAK
9	5875.00	70.25	0.34	70.59	105.20	-34.61	PEAK
10	5925.00	49.37	0.28	49.65	68.20	-18.55	PEAK
11	5928.13	51.27	0.26	51.53	68.20	-16.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

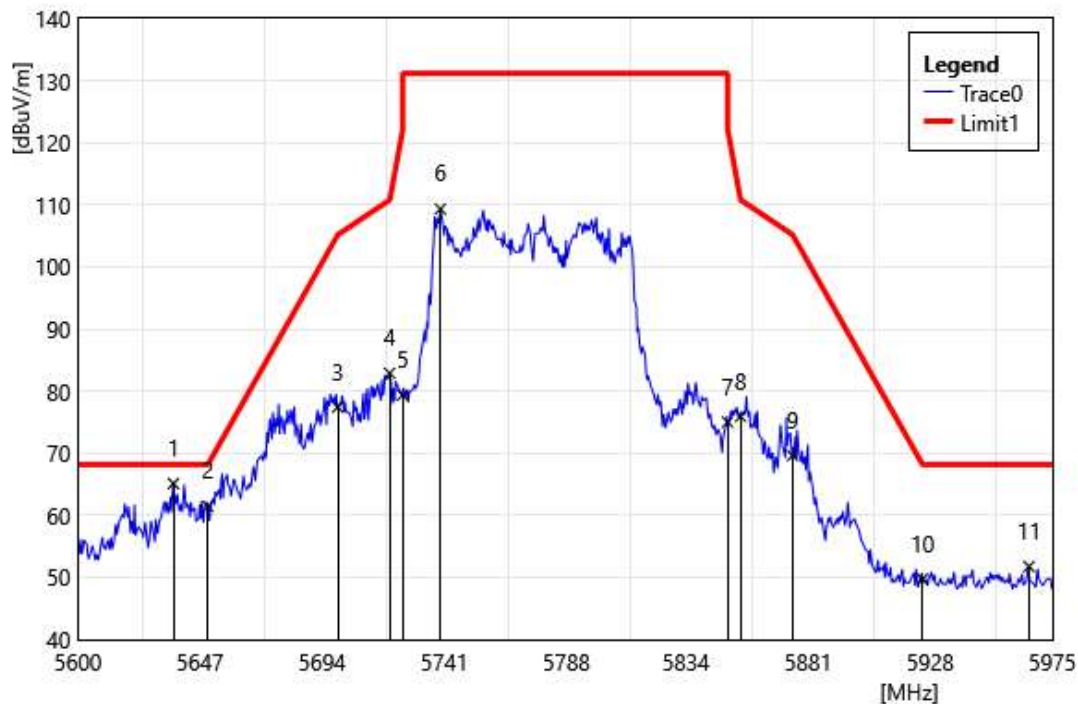

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5636.75	65.75	-0.62	65.13	68.20	-3.07	PEAK
2	5650.00	62.11	-0.64	61.47	68.20	-6.73	PEAK
3	5700.00	78.05	-0.61	77.44	105.20	-27.76	PEAK
4	5720.00	83.30	-0.40	82.90	110.80	-27.90	PEAK
5	5725.00	79.73	-0.34	79.39	122.20	-42.81	PEAK
6	5739.50	109.53	-0.19	109.34	131.20	-21.86	PEAK
7	5850.00	74.73	0.28	75.01	122.20	-47.19	PEAK
8	5855.00	75.65	0.29	75.94	110.80	-34.86	PEAK
9	5875.00	69.31	0.34	69.65	105.20	-35.55	PEAK
10	5925.00	49.45	0.28	49.73	68.20	-18.47	PEAK
11	5966.00	51.58	0.18	51.76	68.20	-16.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

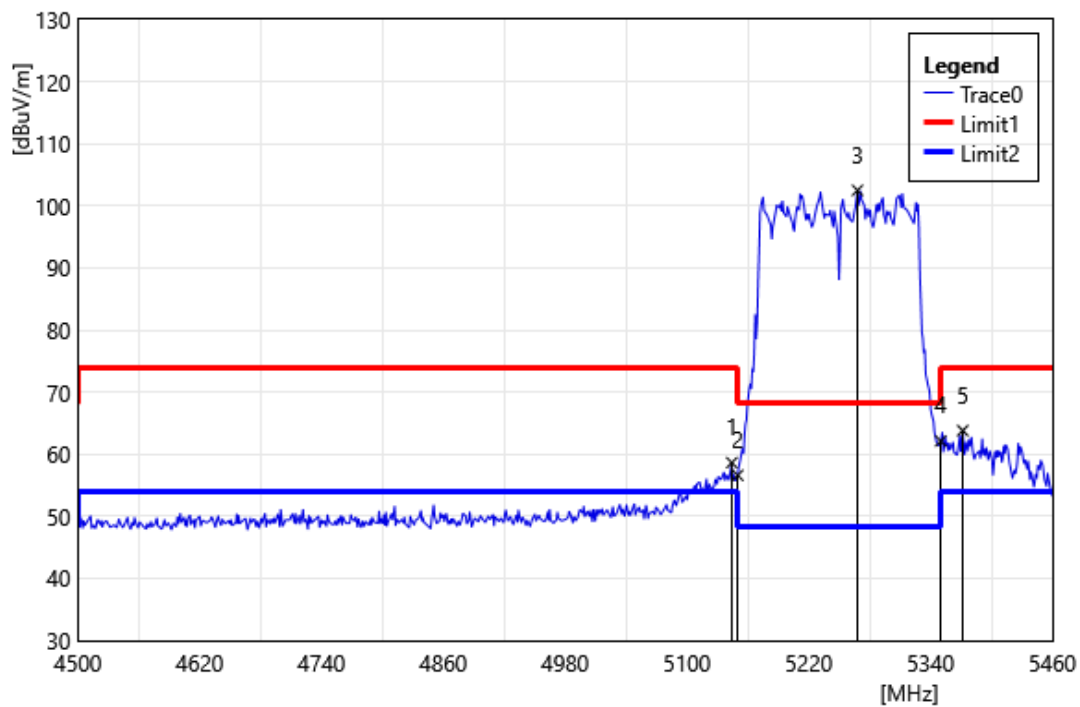

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.16	59.55	-0.90	58.65	74.00	-15.35	PEAK
2	5150.00	57.53	-0.91	56.62	74.00	-17.38	PEAK
3	5268.00	104.04	-1.55	102.49	68.20	34.29	PEAK
4	5350.00	63.42	-1.29	62.13	74.00	-11.87	PEAK
5	5371.68	64.95	-1.14	63.81	74.00	-10.19	PEAK