



Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

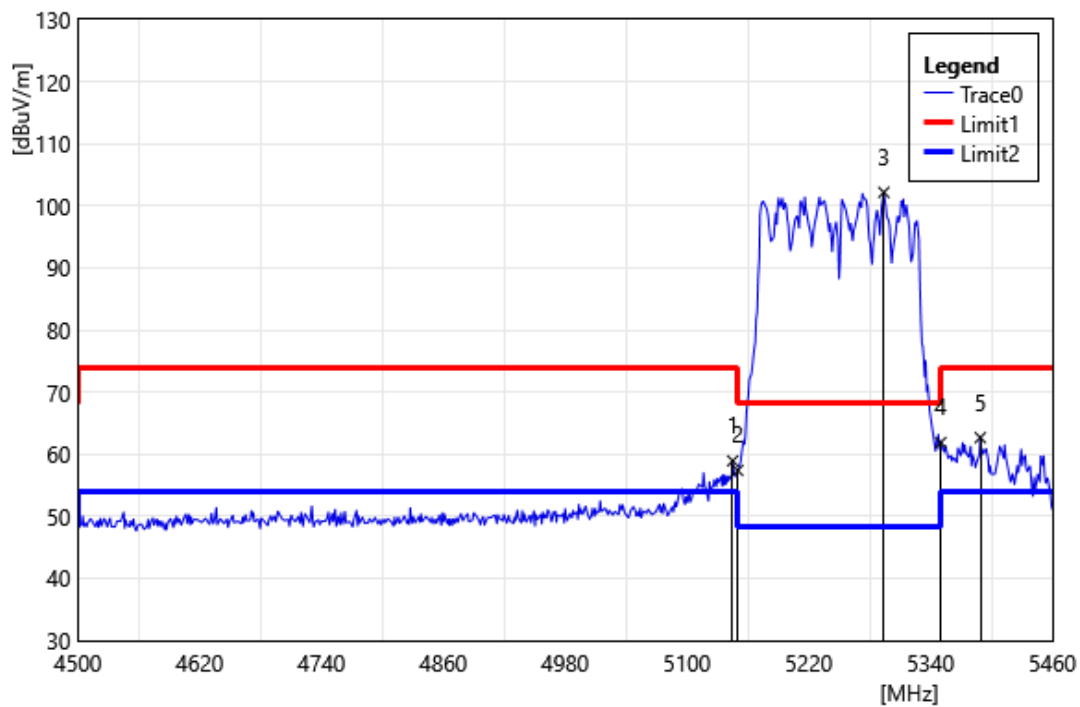


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.12	59.83	-0.90	58.93	74.00	-15.07	PEAK
2	5150.00	58.31	-0.91	57.41	74.00	-16.59	PEAK
3	5293.92	103.81	-1.63	102.18	68.20	33.98	PEAK
4	5350.00	63.17	-1.29	61.88	74.00	-12.12	PEAK
5	5388.96	63.69	-1.02	62.67	74.00	-11.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

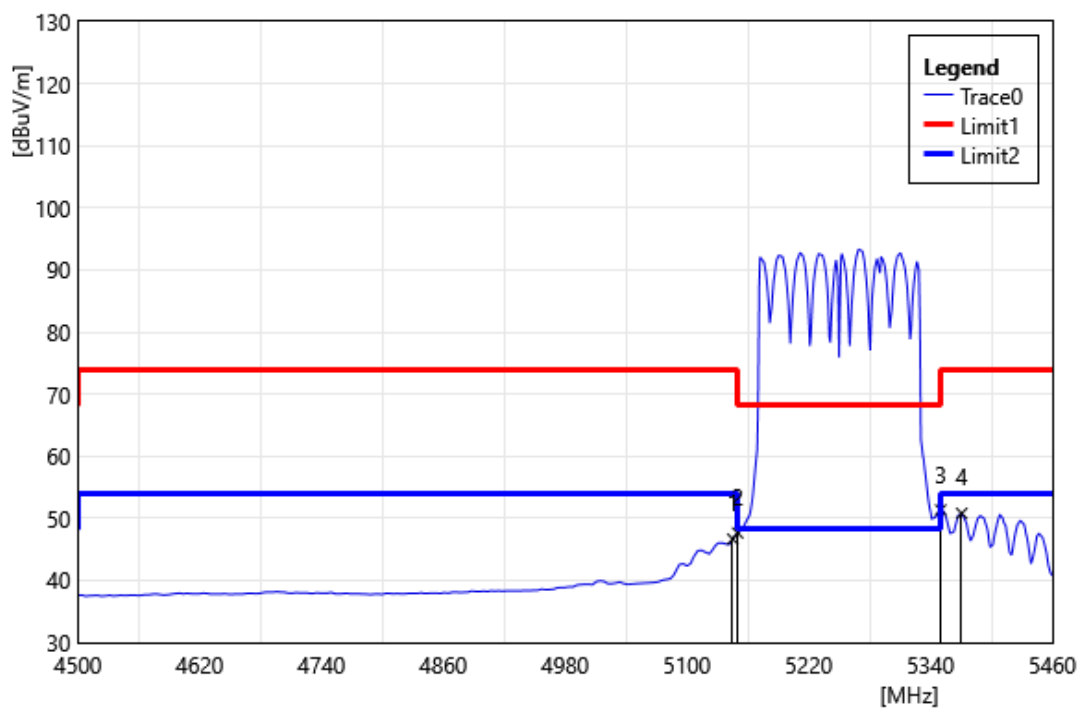


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.12	47.56	-0.90	46.66	54.00	-7.35	AVG
2	5150.00	48.57	-0.91	47.66	54.00	-6.34	AVG
3	5350.00	52.64	-1.29	51.34	54.00	-2.66	AVG
4	5370.72	51.95	-1.15	50.80	54.00	-3.20	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

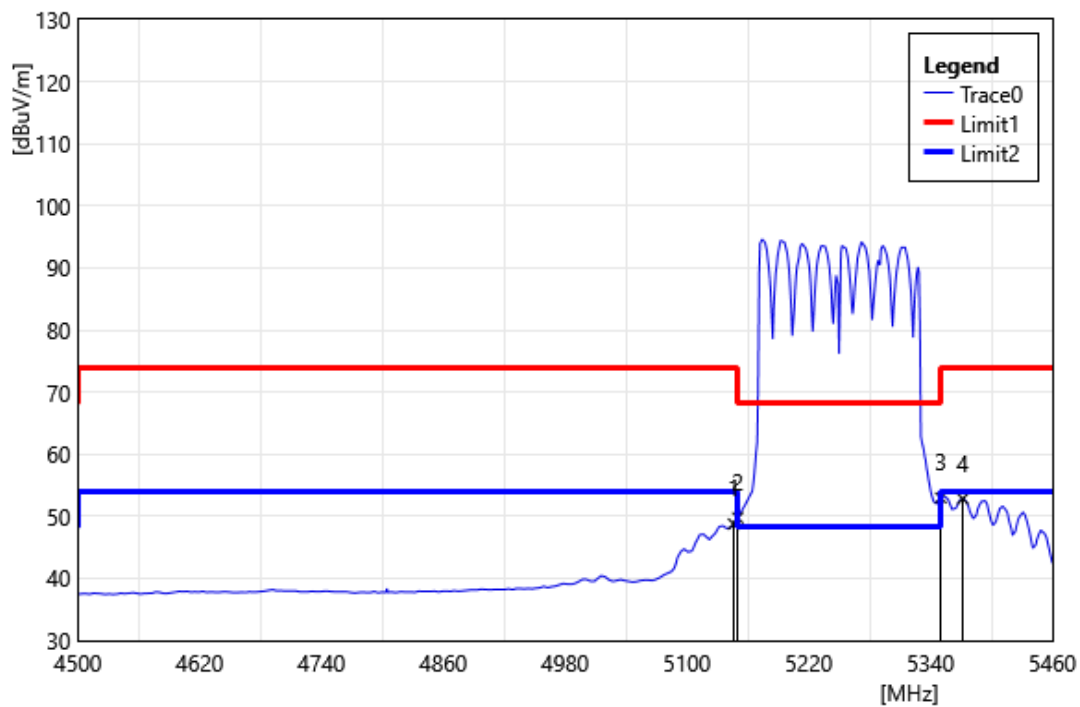


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.08	49.67	-0.90	48.77	54.00	-5.23	AVG
2	5150.00	50.68	-0.91	49.78	54.00	-4.22	AVG
3	5350.00	54.28	-1.29	52.99	54.00	-1.01	AVG
4	5371.68	53.98	-1.14	52.84	54.00	-1.16	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

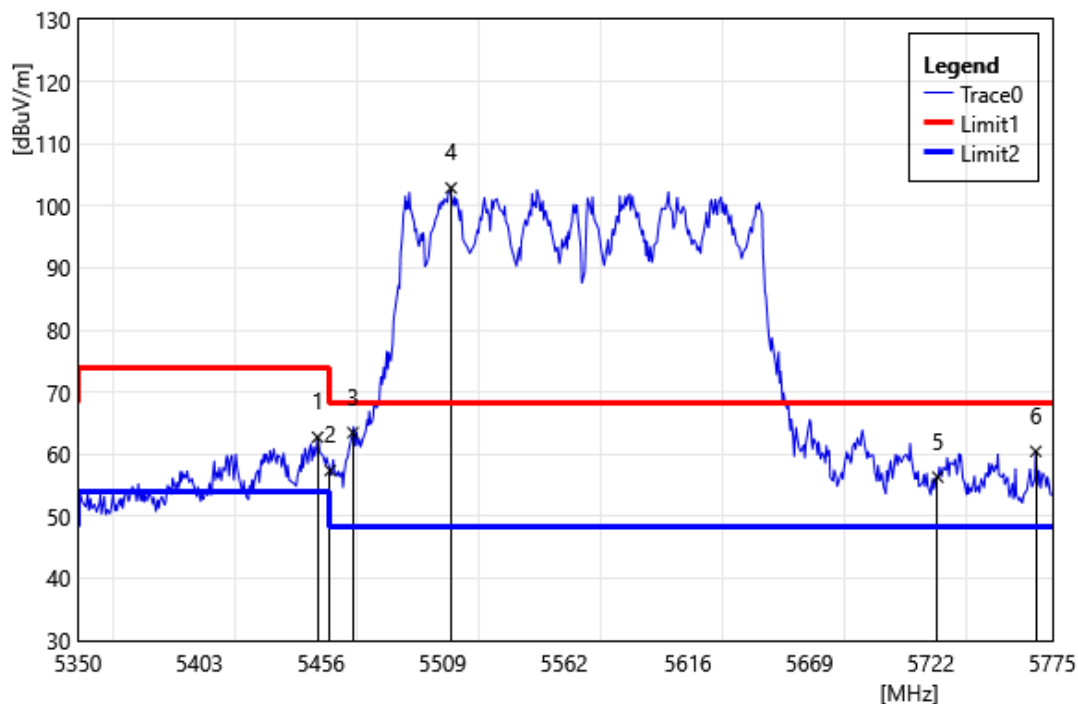


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.55	63.32	-0.58	62.74	74.00	-11.26	PEAK
2	5460.00	57.95	-0.57	57.38	74.00	-16.62	PEAK
3	5470.00	64.05	-0.56	63.49	68.20	-4.71	PEAK
4	5512.78	103.40	-0.52	102.88	68.20	34.68	PEAK
5	5725.00	56.67	-0.34	56.33	68.20	-11.87	PEAK
6	5767.78	60.47	0.00	60.47	68.20	-7.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

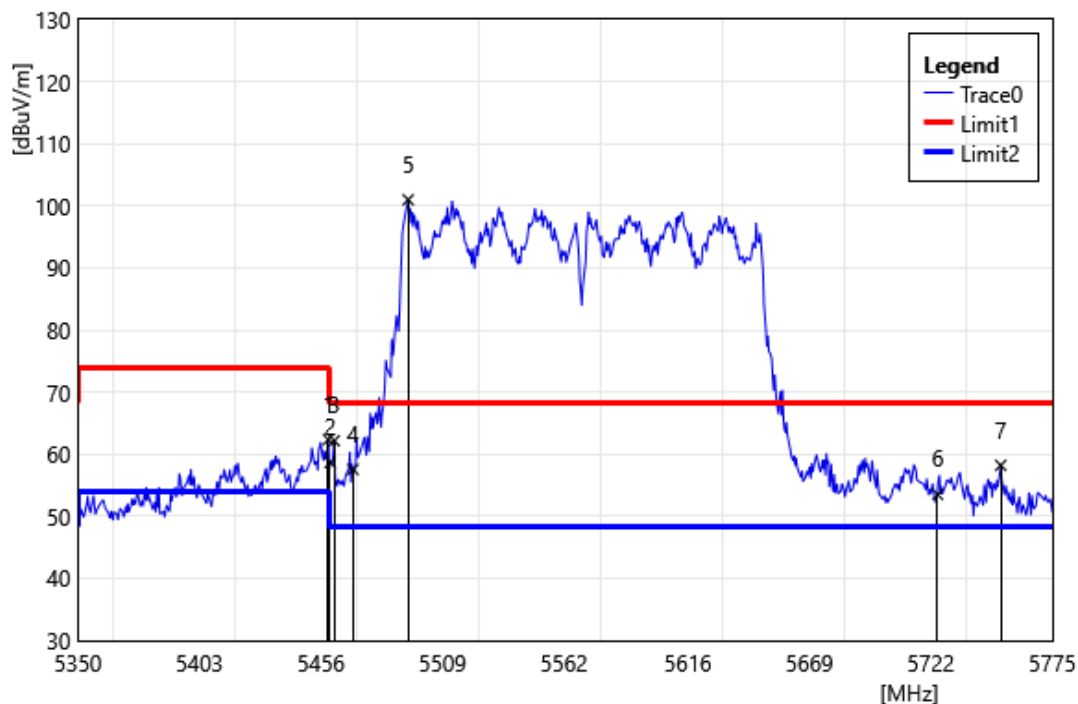


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.23	62.93	-0.57	62.36	74.00	-11.64	PEAK
2	5460.00	59.25	-0.57	58.68	74.00	-15.32	PEAK
3	5461.78	62.75	-0.57	62.18	68.20	-6.02	PEAK
4	5470.00	58.11	-0.56	57.55	68.20	-10.65	PEAK
5	5494.08	101.52	-0.54	100.98	68.20	32.78	PEAK
6	5725.00	53.85	-0.34	53.51	68.20	-14.69	PEAK
7	5752.48	58.28	-0.07	58.22	68.20	-9.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

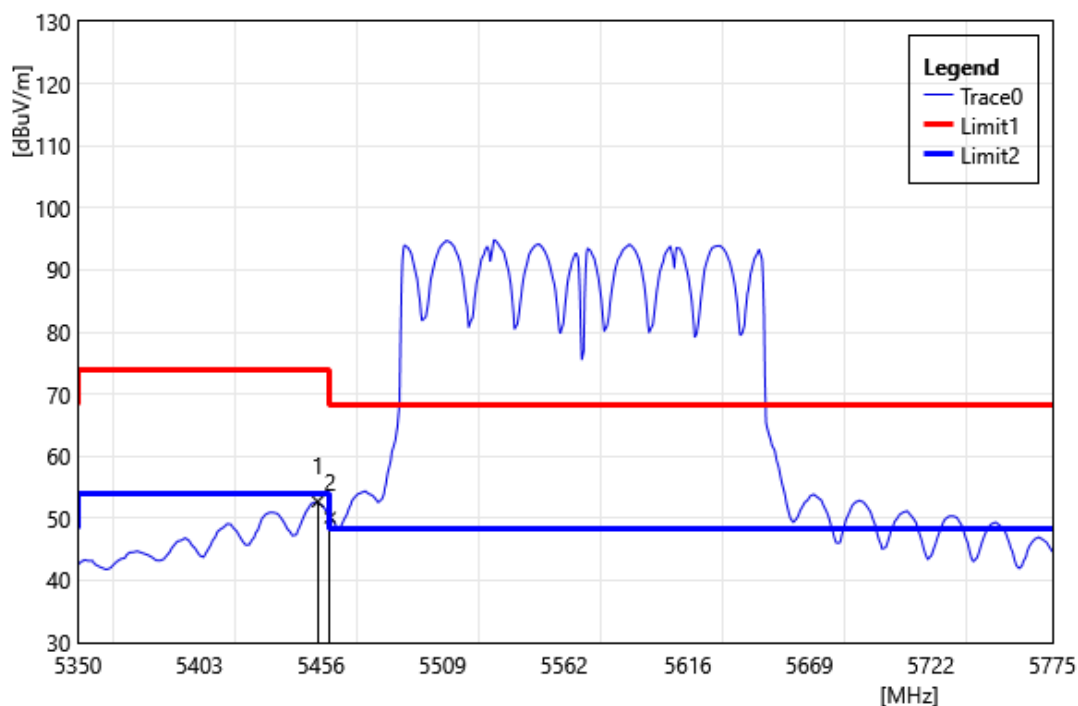


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.55	53.29	-0.58	52.71	54.00	-1.29	AVG
2	5460.00	50.68	-0.57	50.11	54.00	-3.89	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

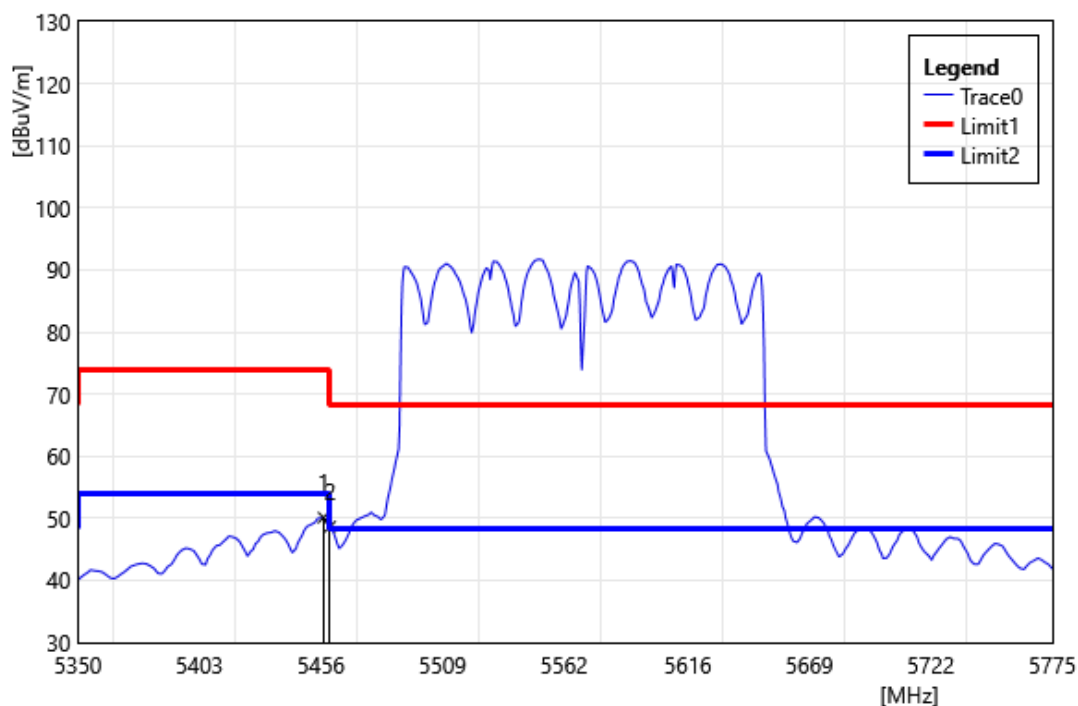


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.10	50.70	-0.58	50.12	54.00	-3.88	AVG
2	5460.00	49.24	-0.57	48.67	54.00	-5.33	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

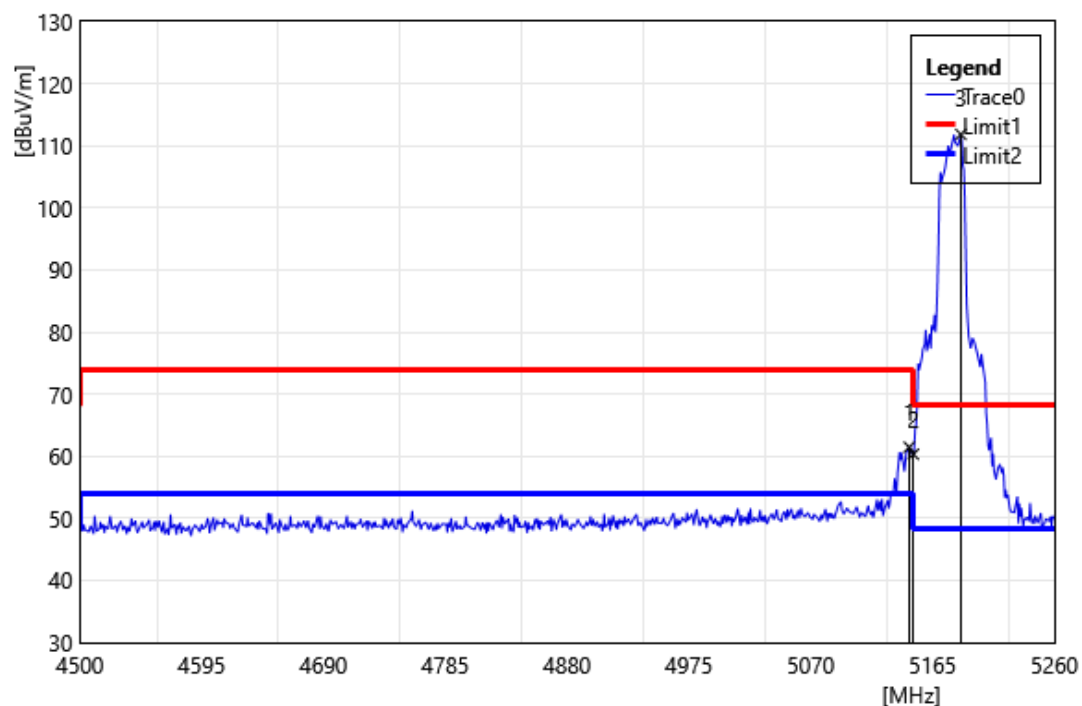


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	62.36	-0.90	61.46	74.00	-12.54	PEAK
2	5150.00	61.23	-0.91	60.32	74.00	-13.68	PEAK
3	5187.04	112.93	-1.09	111.84	68.20	43.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

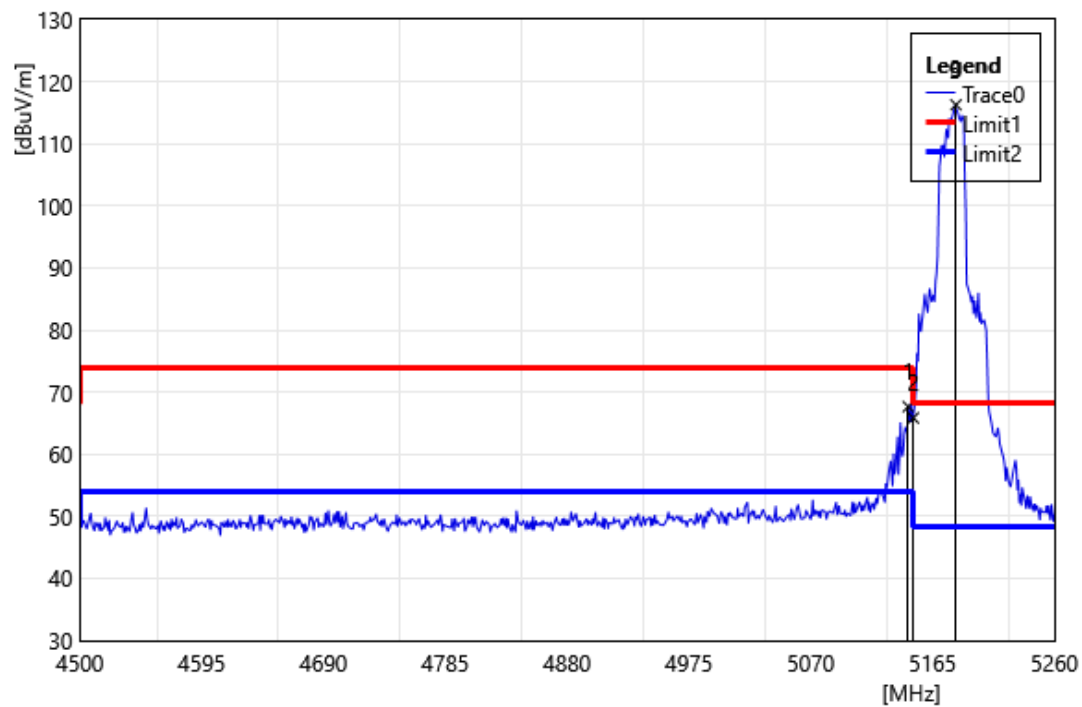


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	68.57	-0.90	67.67	74.00	-6.33	PEAK
2	5150.00	66.77	-0.91	65.86	74.00	-8.14	PEAK
3	5183.24	117.35	-1.07	116.28	68.20	48.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

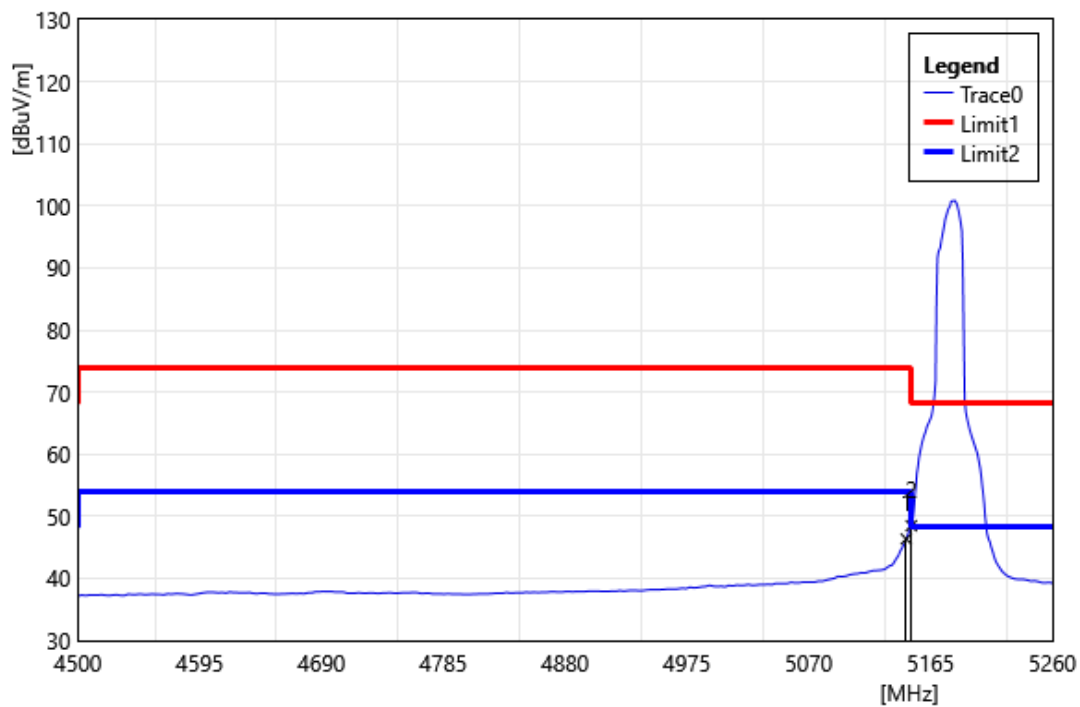


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	47.25	-0.90	46.35	54.00	-7.65	AVG
2	5150.00	49.40	-0.91	48.49	54.00	-5.51	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

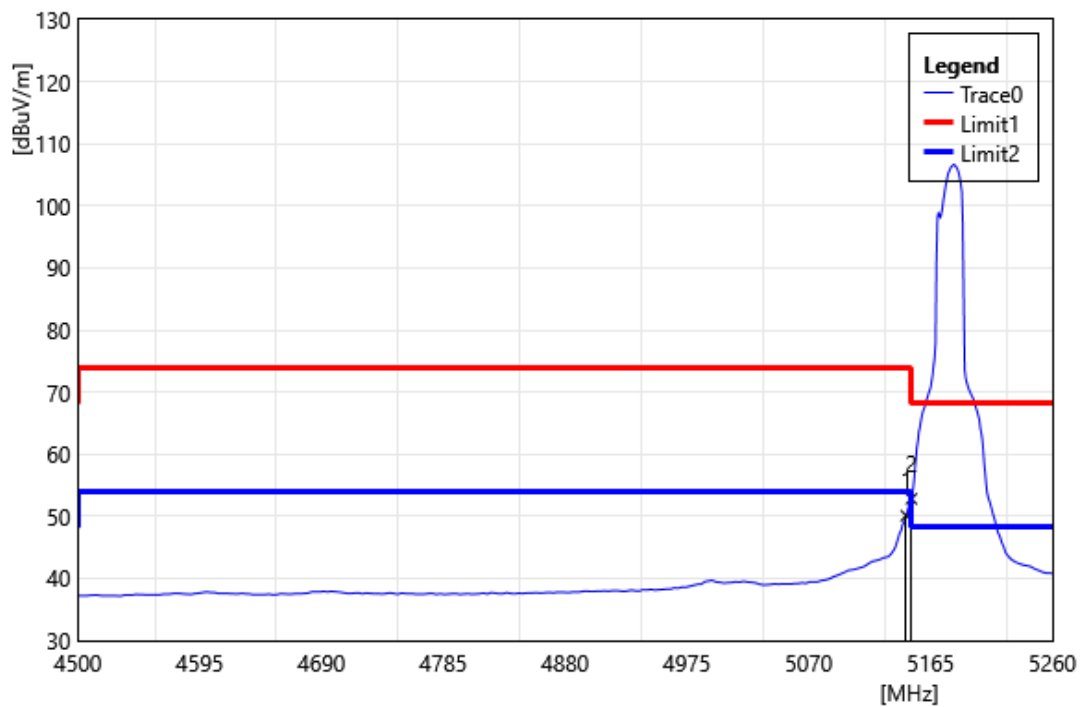


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	51.00	-0.90	50.10	54.00	-3.90	AVG
2	5150.00	53.73	-0.91	52.82	54.00	-1.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

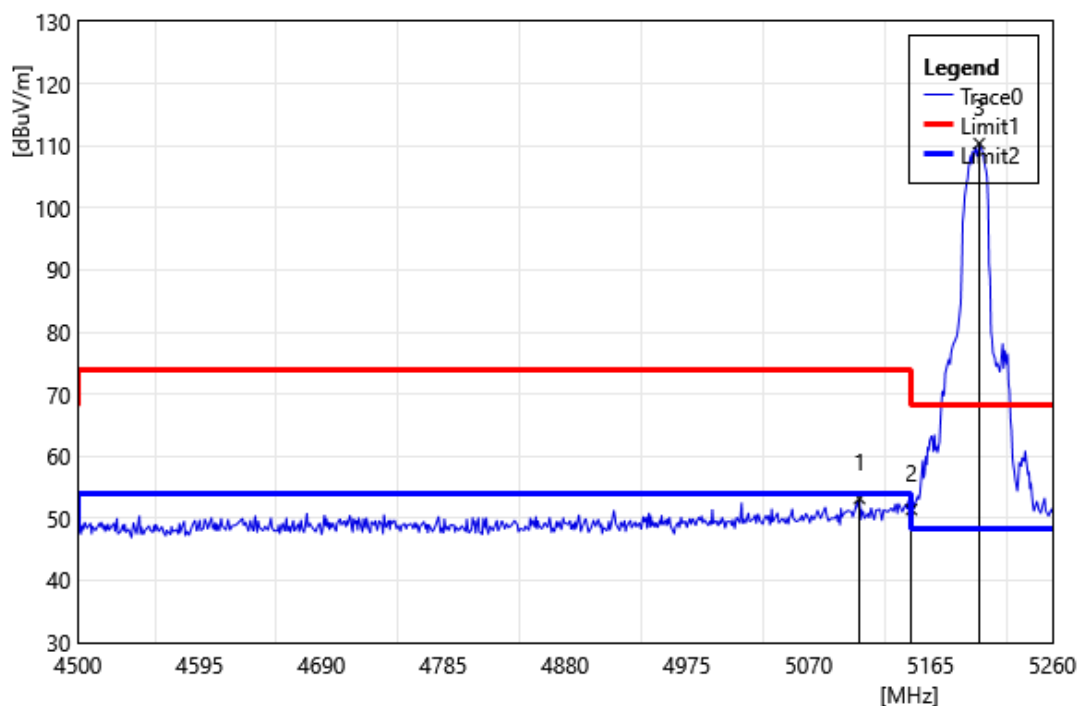


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5109.52	54.06	-0.87	53.19	74.00	-20.81	PEAK
2	5150.00	52.32	-0.91	51.41	74.00	-22.59	PEAK
3	5203.00	111.53	-1.17	110.36	68.20	42.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

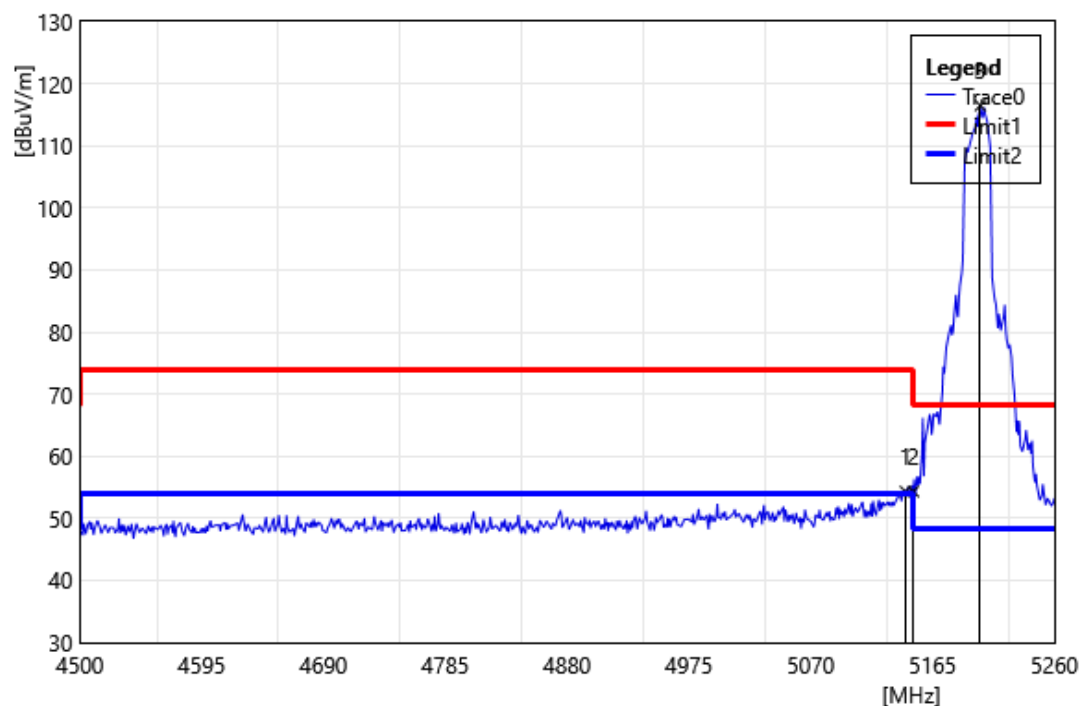


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	55.23	-0.90	54.33	74.00	-19.67	PEAK
2	5150.00	55.23	-0.91	54.32	74.00	-19.68	PEAK
3	5202.24	117.65	-1.17	116.48	68.20	48.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

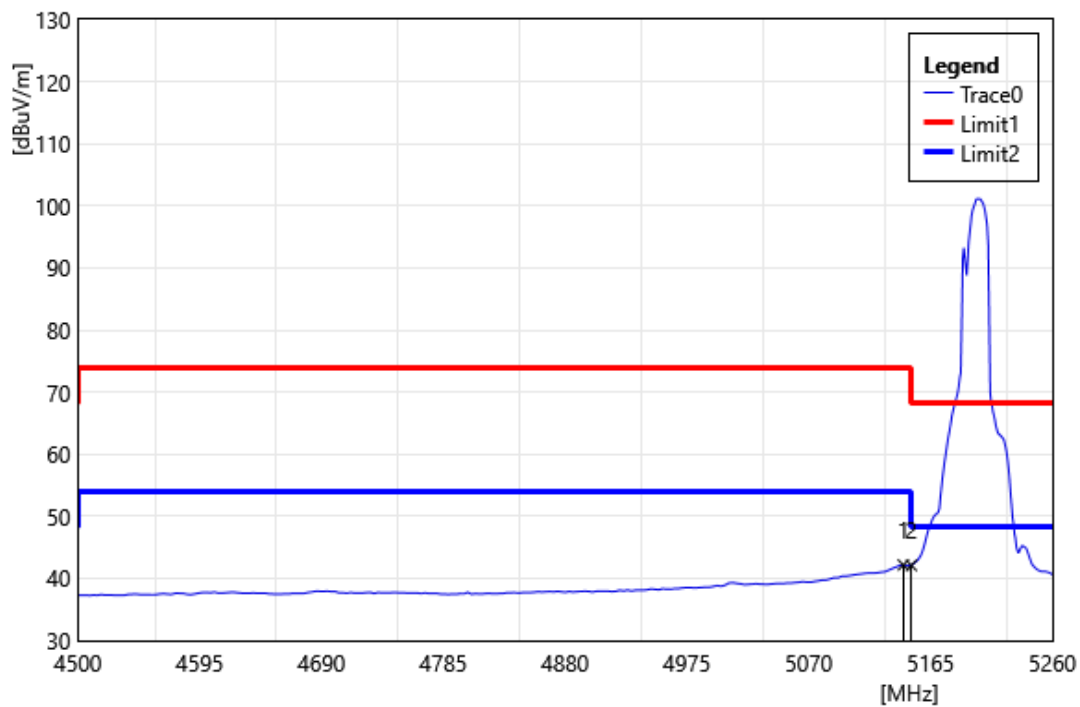


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	43.07	-0.90	42.17	54.00	-11.83	AVG
2	5150.00	43.02	-0.91	42.11	54.00	-11.89	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

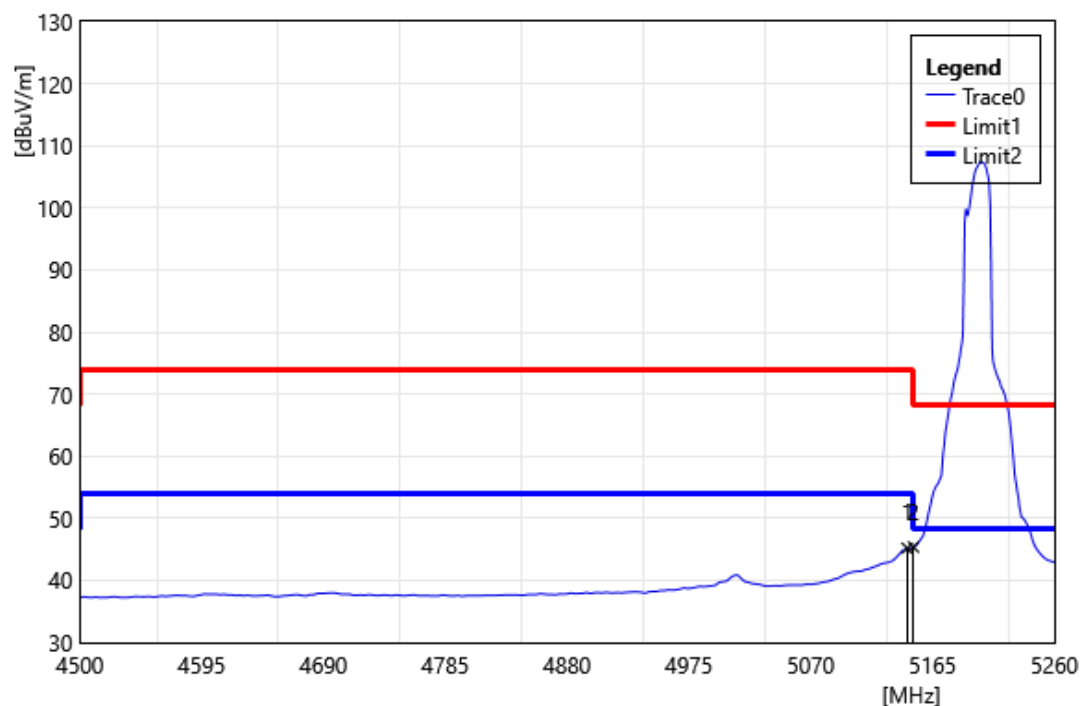


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	46.10	-0.90	45.20	54.00	-8.80	AVG
2	5150.00	46.31	-0.91	45.40	54.00	-8.60	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

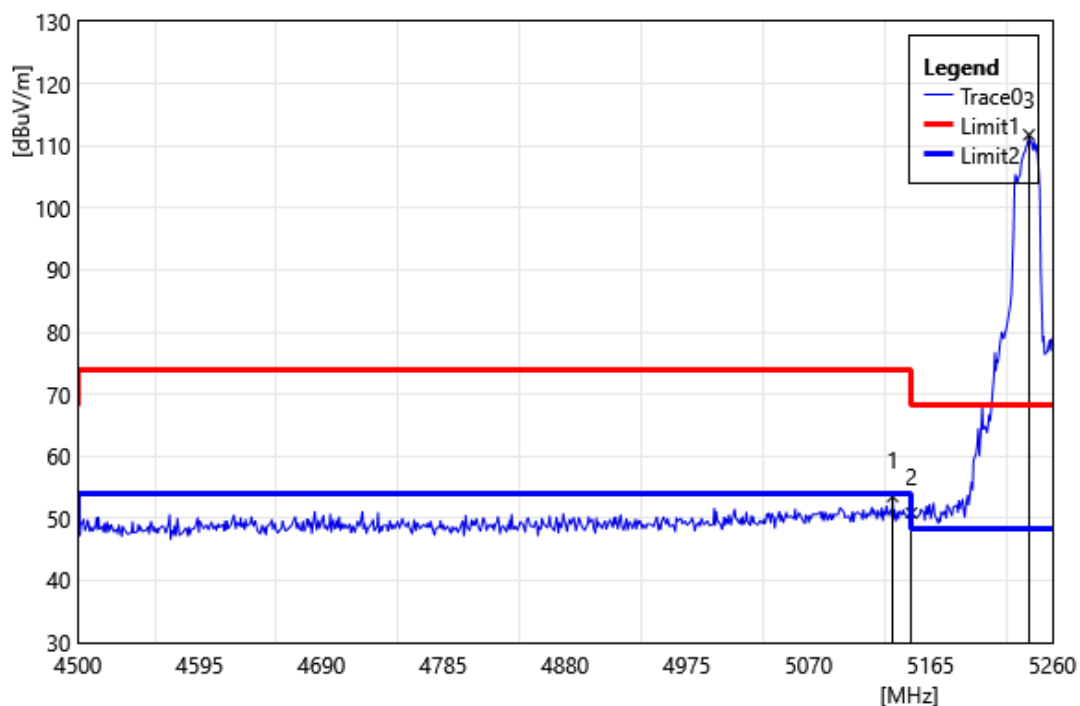


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5135.36	54.37	-0.89	53.48	74.00	-20.52	PEAK
2	5150.00	51.76	-0.91	50.85	74.00	-23.15	PEAK
3	5241.76	113.22	-1.44	111.78	68.20	43.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

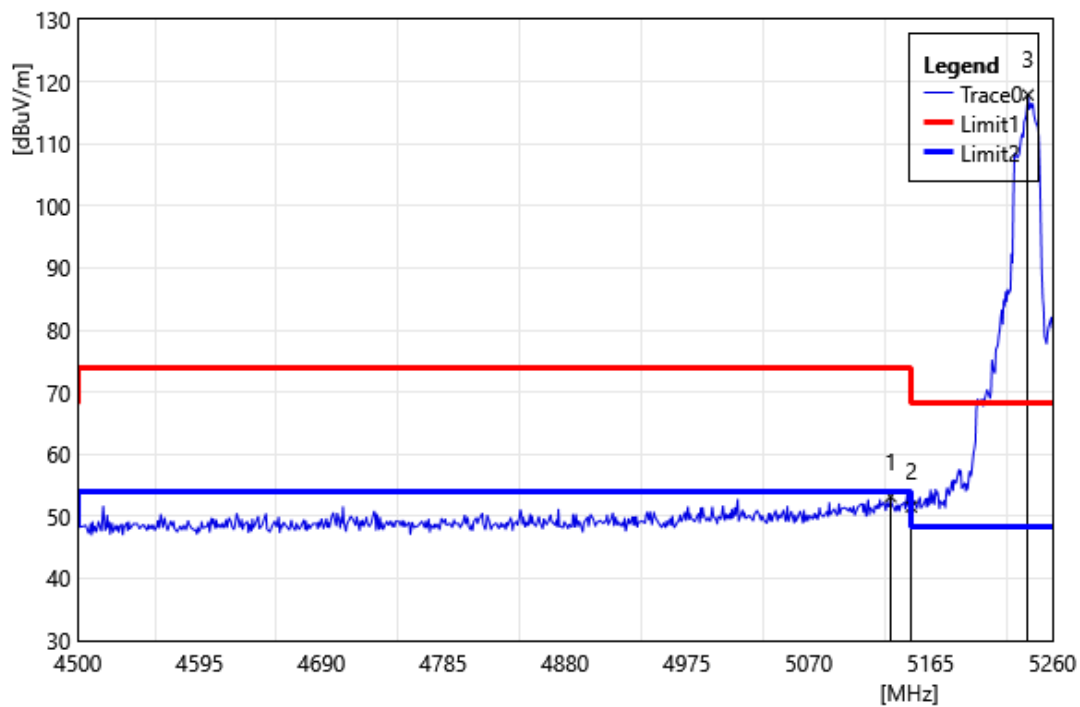


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5133.84	54.06	-0.89	53.17	74.00	-20.84	PEAK
2	5150.00	52.44	-0.91	51.54	74.00	-22.46	PEAK
3	5241.00	119.32	-1.44	117.88	68.20	49.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

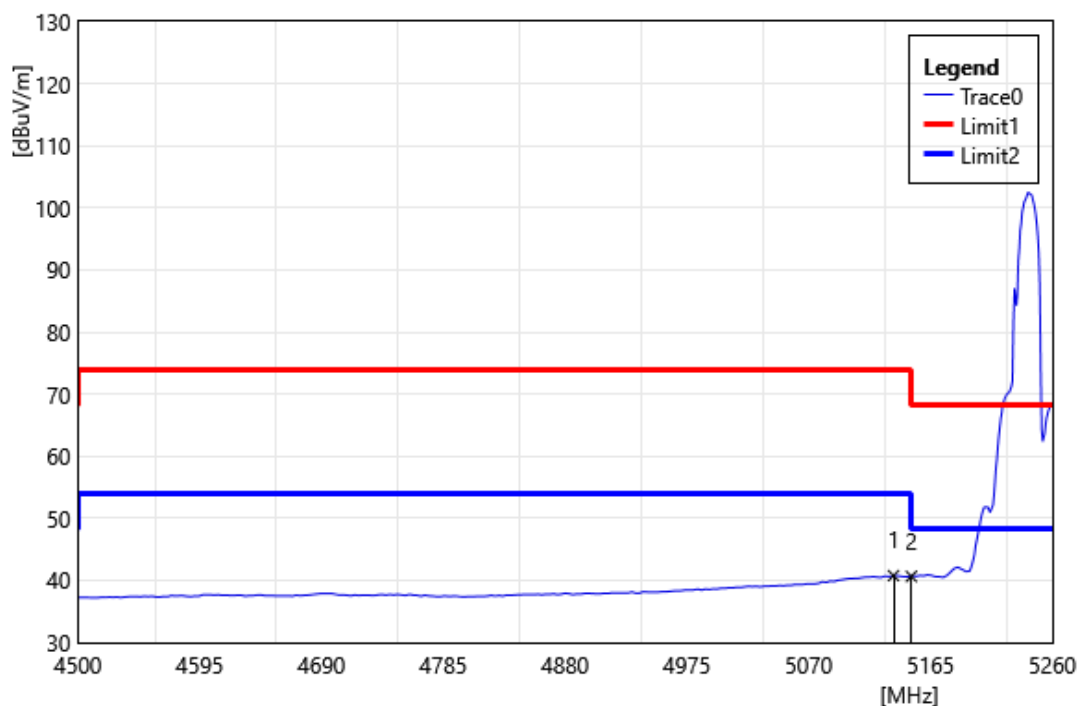


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.12	41.68	-0.90	40.78	54.00	-13.22	AVG
2	5150.00	41.56	-0.91	40.65	54.00	-13.35	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

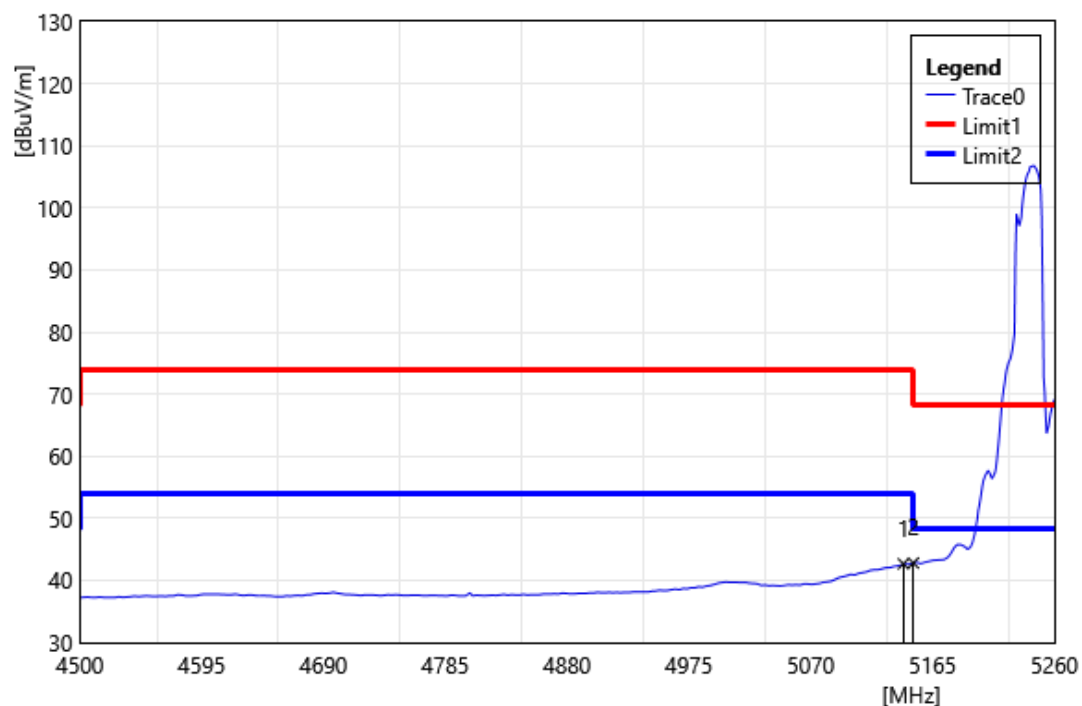


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.20	43.58	-0.90	42.68	54.00	-11.32	AVG
2	5150.00	43.71	-0.91	42.80	54.00	-11.20	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

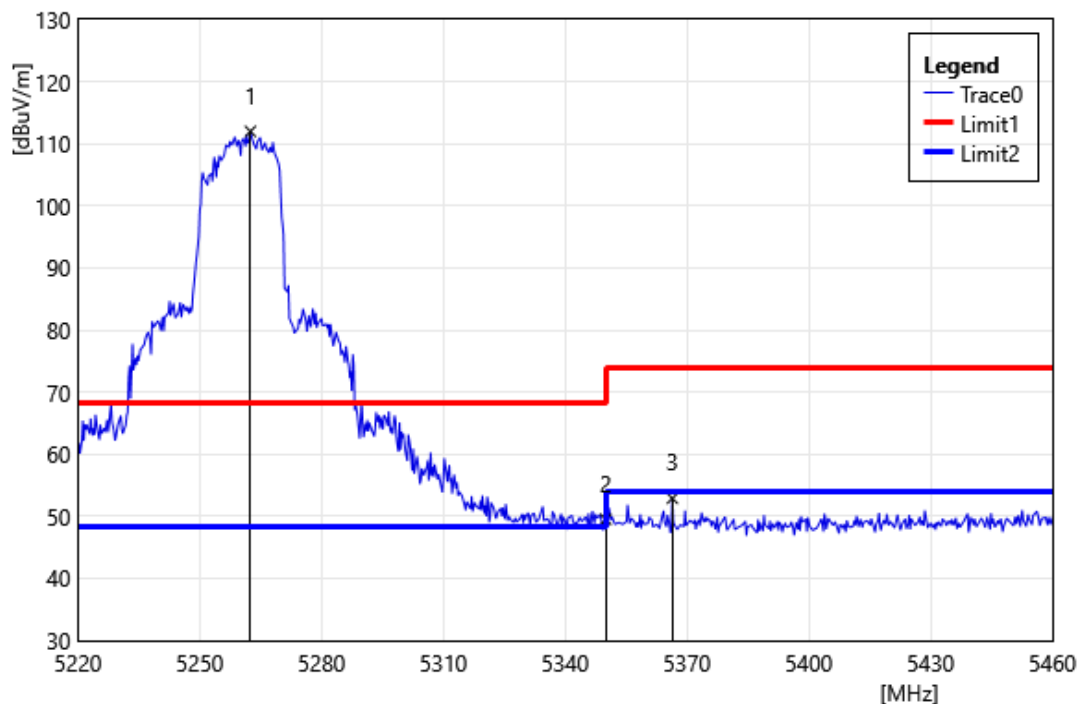


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5262.48	113.54	-1.54	112.00	68.20	43.80	PEAK
2	5350.00	50.80	-1.29	49.51	74.00	-24.49	PEAK
3	5366.40	54.08	-1.18	52.90	74.00	-21.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

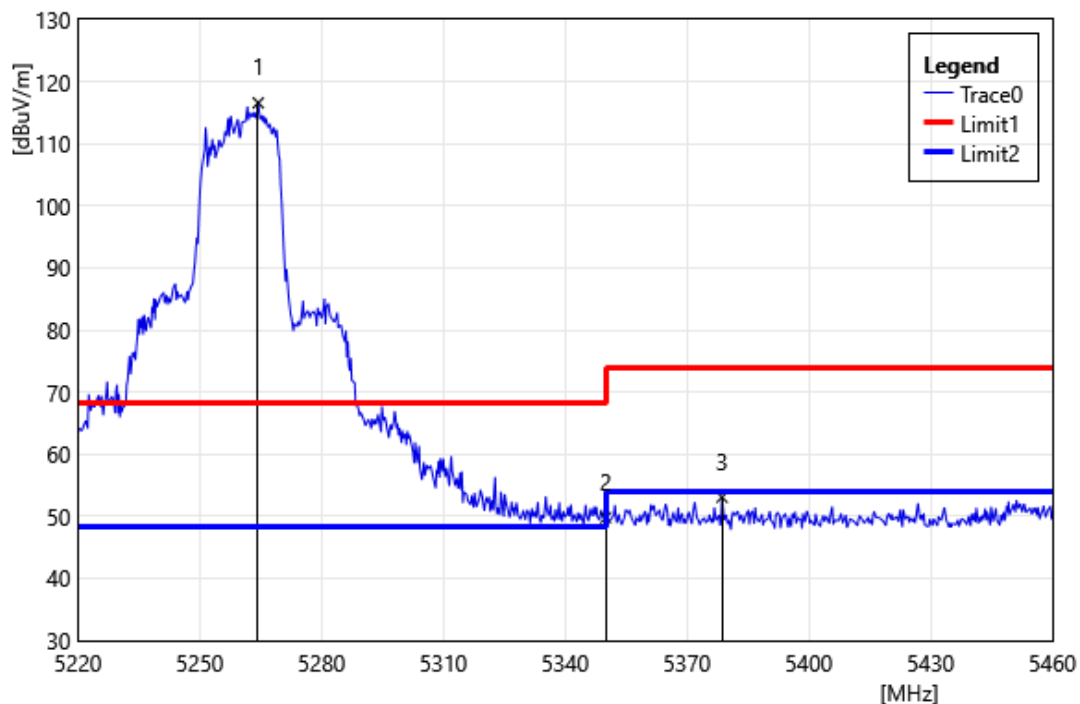


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5264.40	118.12	-1.54	116.58	68.20	48.38	PEAK
2	5350.00	51.09	-1.29	49.80	74.00	-24.20	PEAK
3	5378.64	54.17	-1.09	53.08	74.00	-20.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

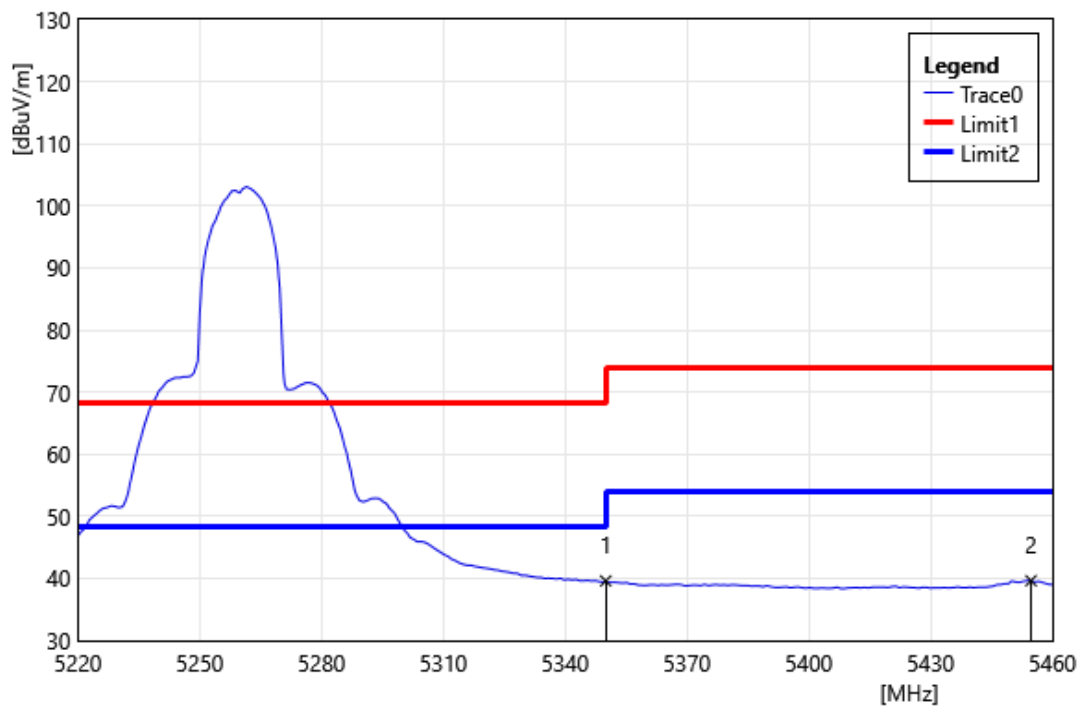


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.91	-1.29	39.61	54.00	-14.39	AVG
2	5454.72	40.22	-0.58	39.64	54.00	-14.36	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

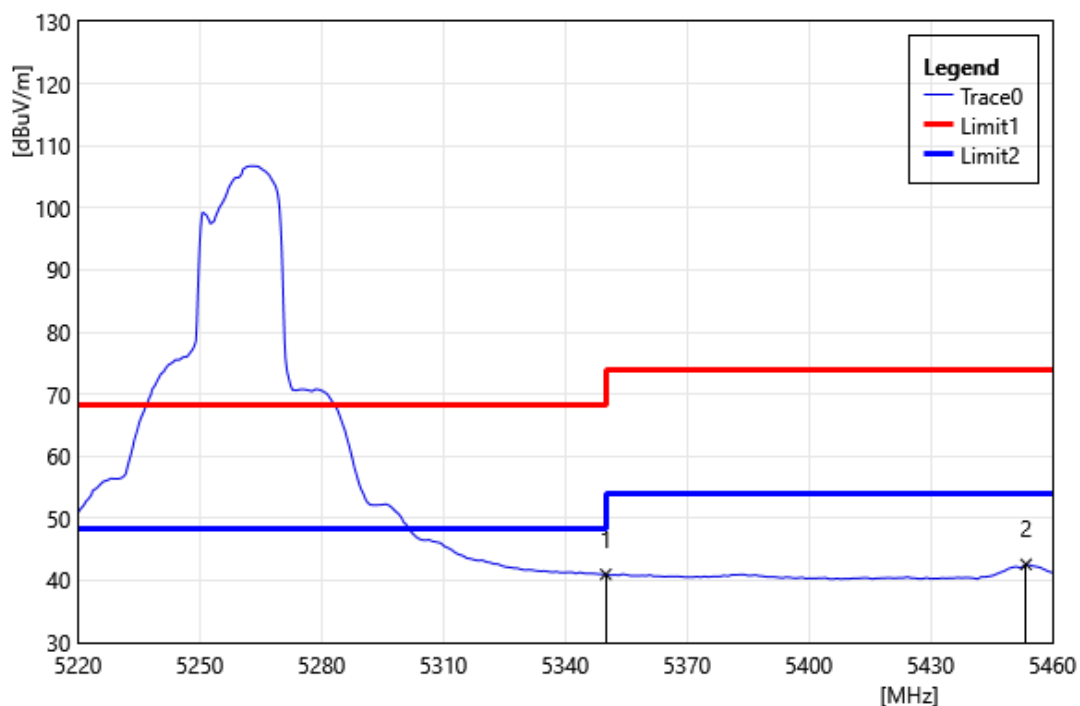


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	42.27	-1.29	40.98	54.00	-13.02	AVG
2	5453.52	43.16	-0.58	42.58	54.00	-11.42	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

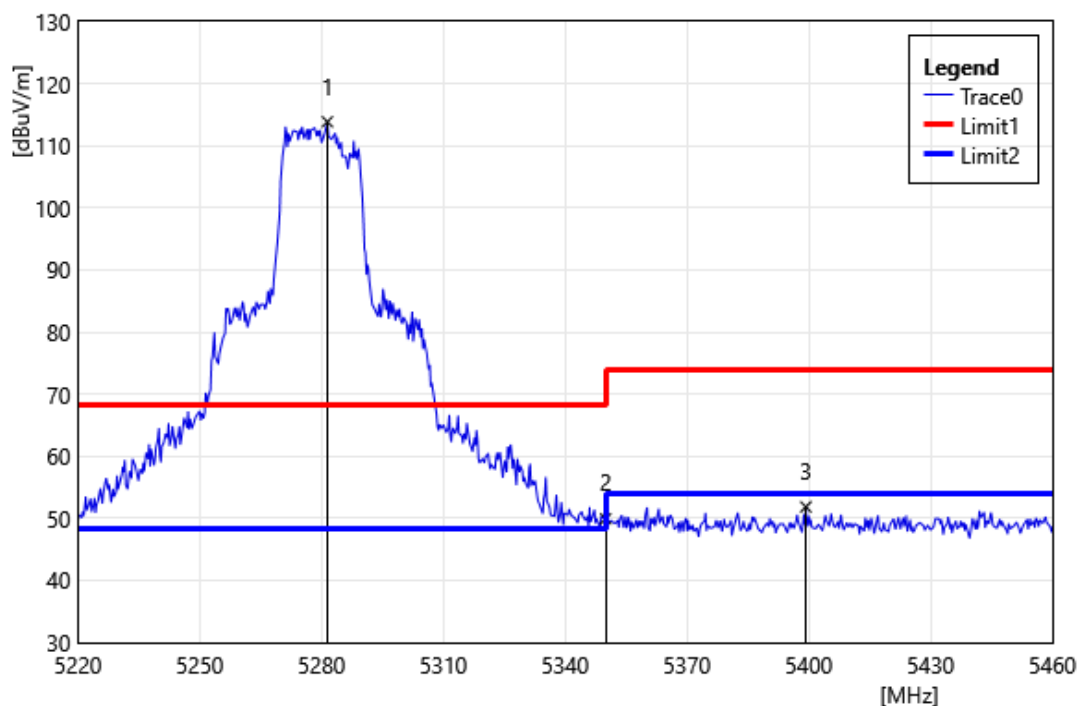


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5281.44	115.46	-1.59	113.87	68.20	45.67	PEAK
2	5350.00	51.23	-1.29	49.93	74.00	-24.07	PEAK
3	5399.28	52.79	-0.94	51.85	74.00	-22.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

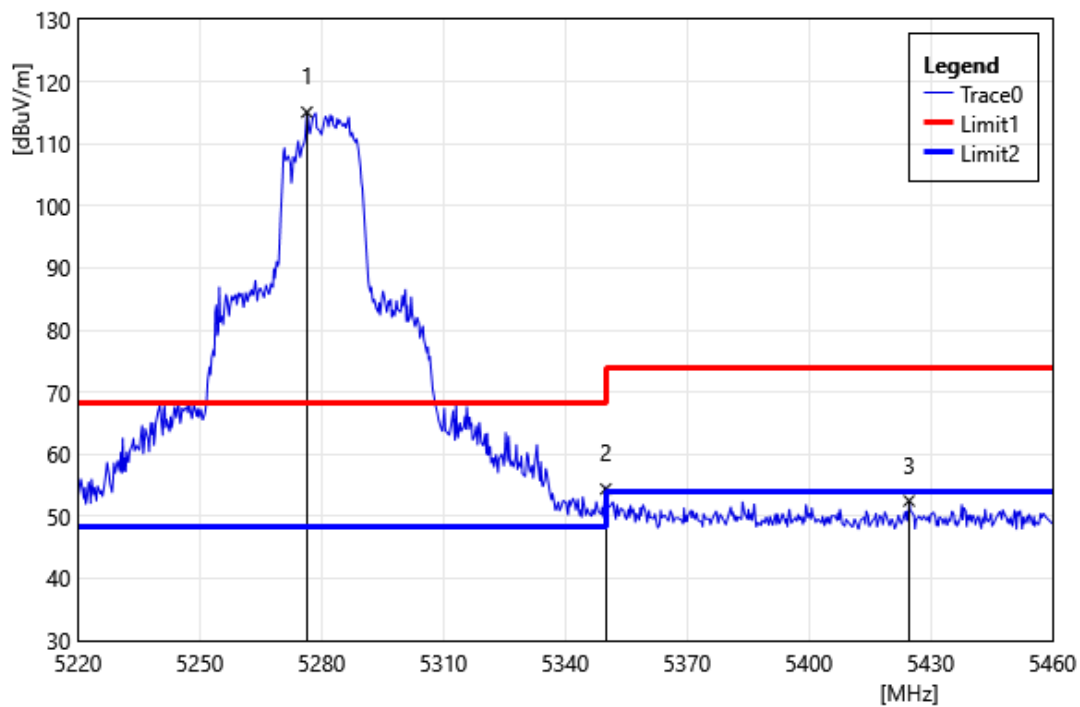


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5276.40	116.67	-1.58	115.09	68.20	46.89	PEAK
2	5350.00	55.70	-1.29	54.40	74.00	-19.60	PEAK
3	5424.72	53.25	-0.76	52.49	74.00	-21.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

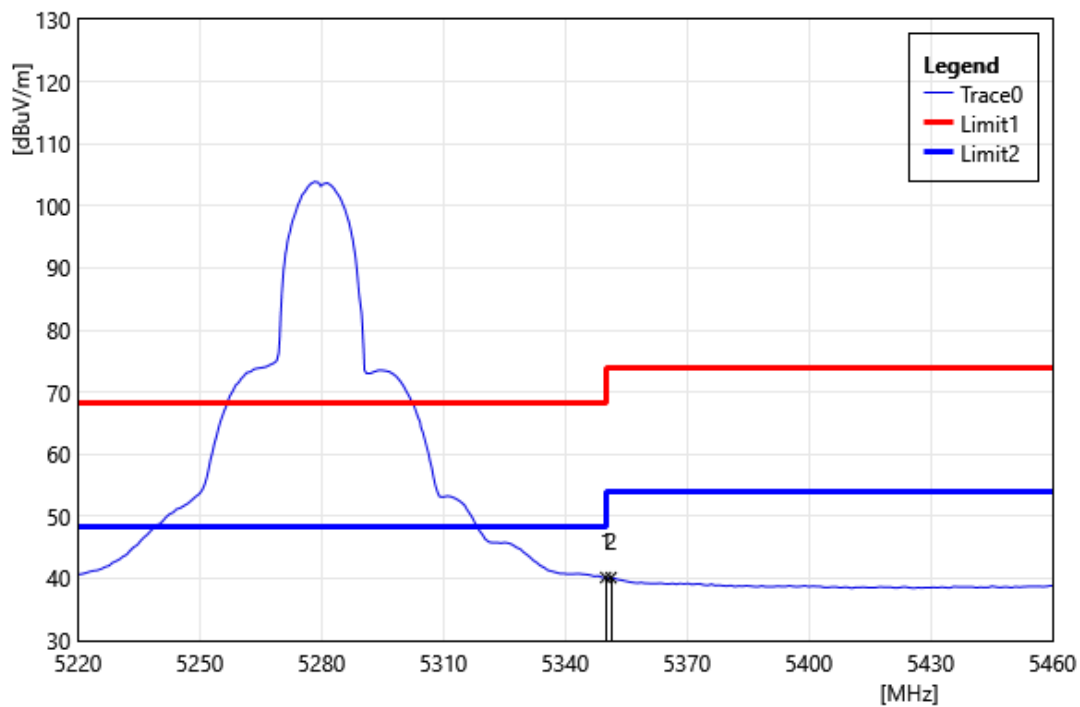


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.44	-1.29	40.14	54.00	-13.86	AVG
2	5351.28	41.40	-1.28	40.12	54.00	-13.88	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

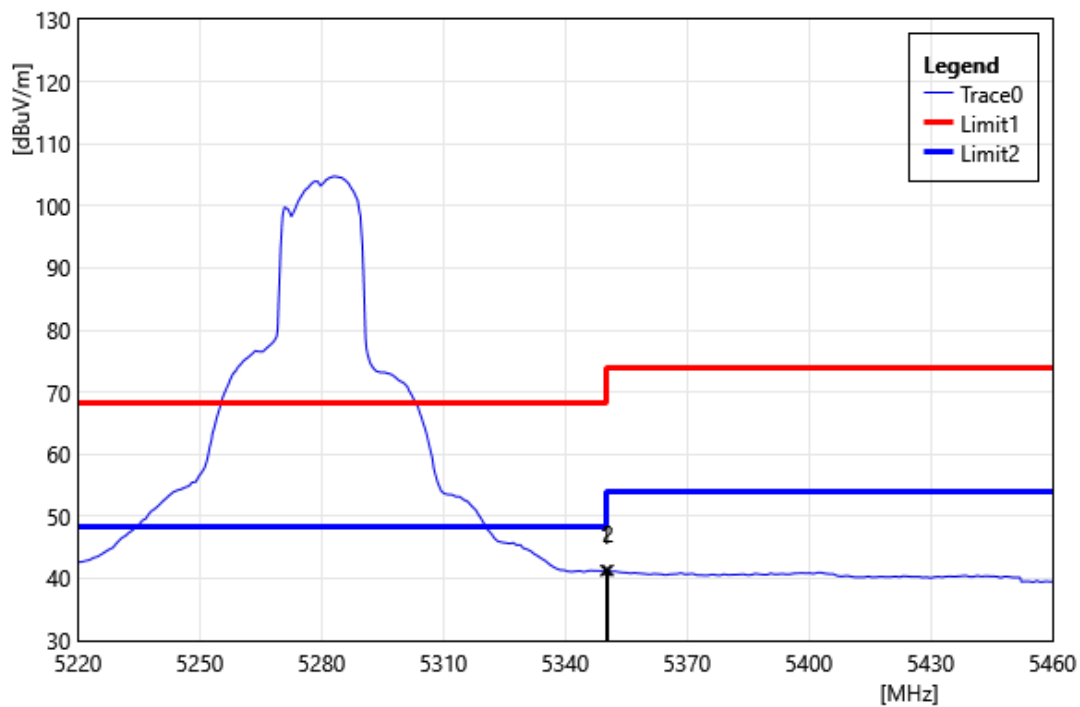


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	42.56	-1.29	41.27	54.00	-12.73	AVG
2	5350.56	42.59	-1.29	41.30	54.00	-12.70	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

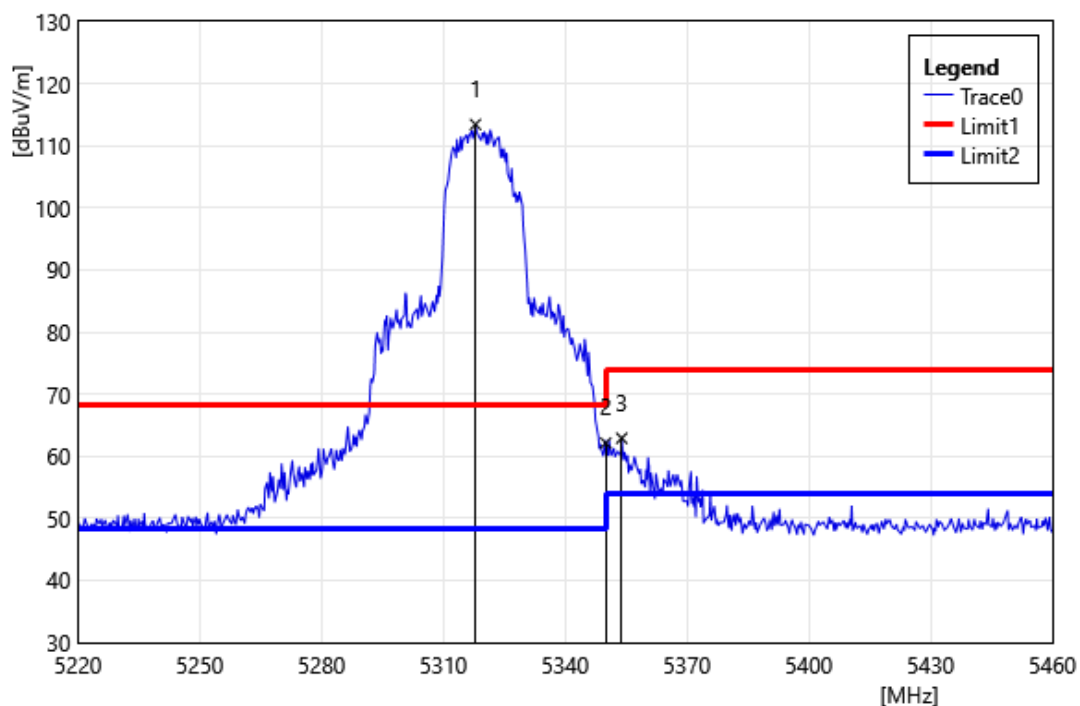


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5317.92	114.95	-1.52	113.43	68.20	45.23	PEAK
2	5350.00	63.42	-1.29	62.13	74.00	-11.87	PEAK
3	5353.92	64.16	-1.26	62.90	74.00	-11.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

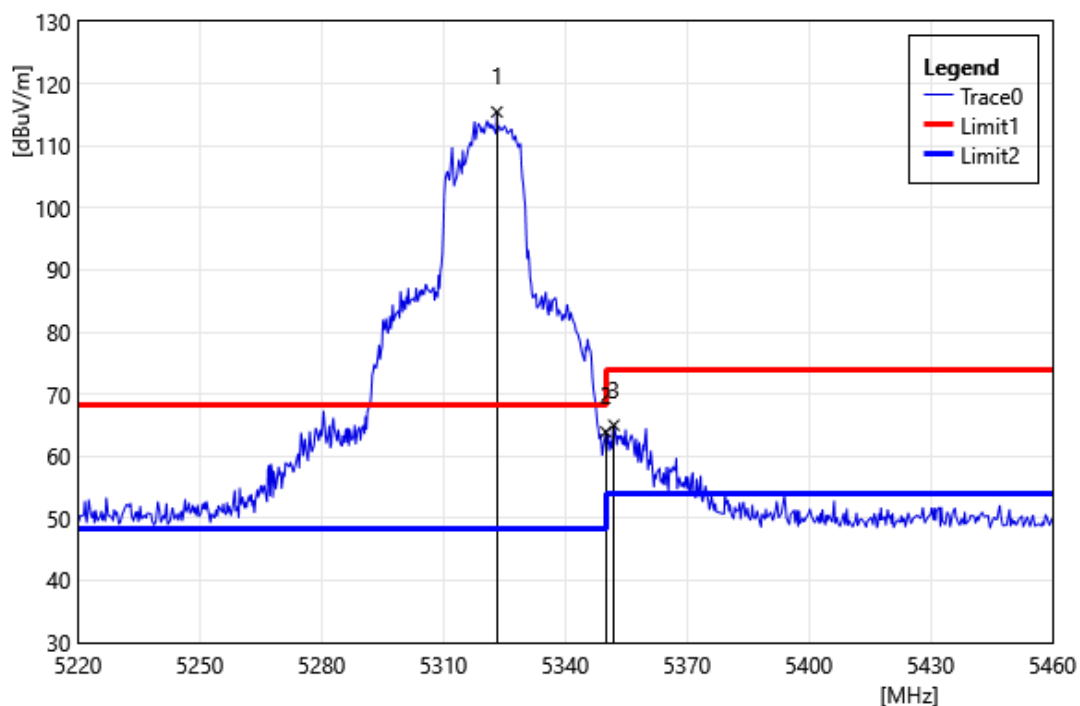


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5323.20	116.92	-1.48	115.44	68.20	47.24	PEAK
2	5350.00	65.21	-1.29	63.92	74.00	-10.08	PEAK
3	5352.00	66.28	-1.28	65.00	74.00	-9.00	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

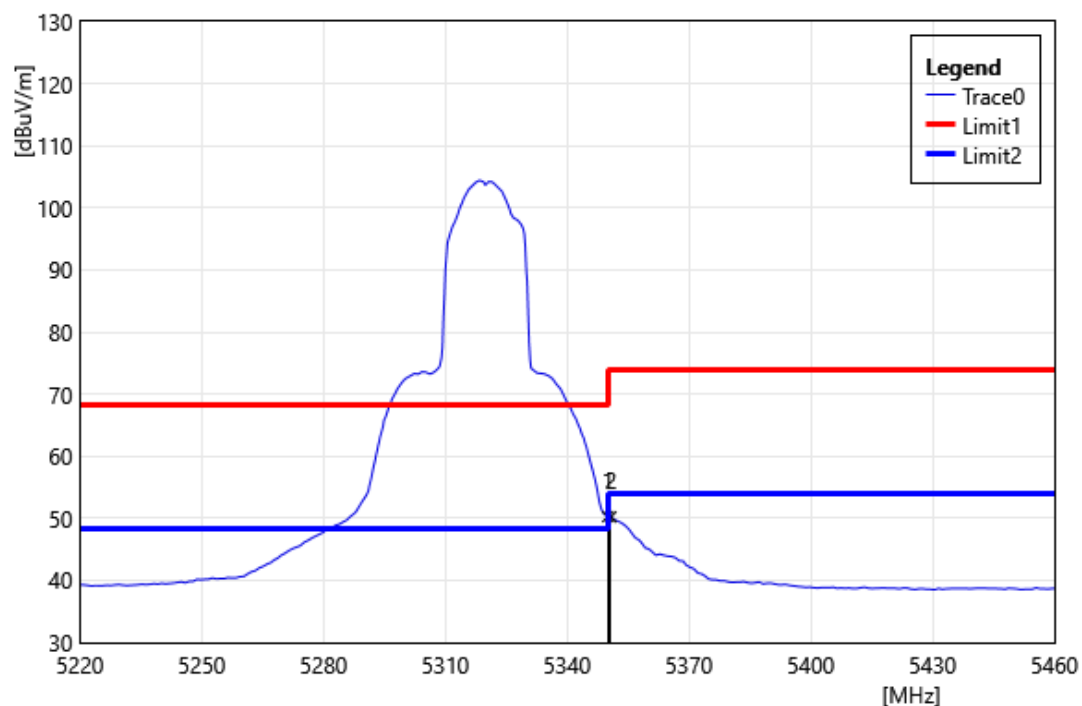


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	51.56	-1.29	50.27	54.00	-3.73	AVG
2	5350.80	51.52	-1.29	50.23	54.00	-3.77	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

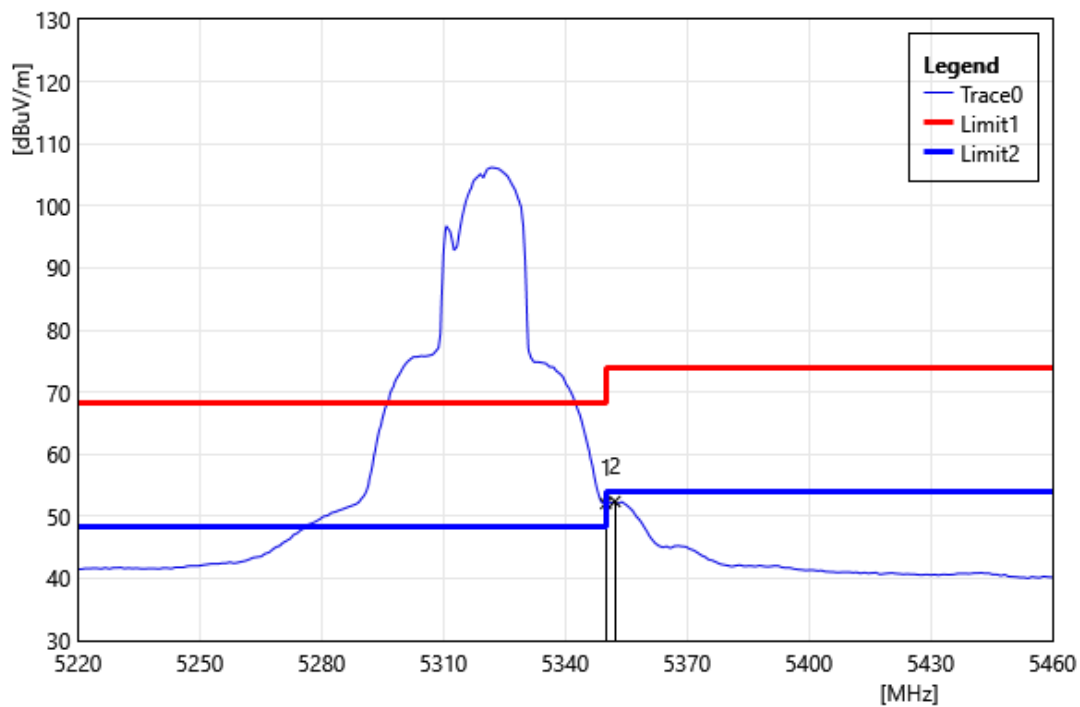


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.35	-1.29	52.06	54.00	-1.94	AVG
2	5352.24	53.68	-1.28	52.40	54.00	-1.60	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

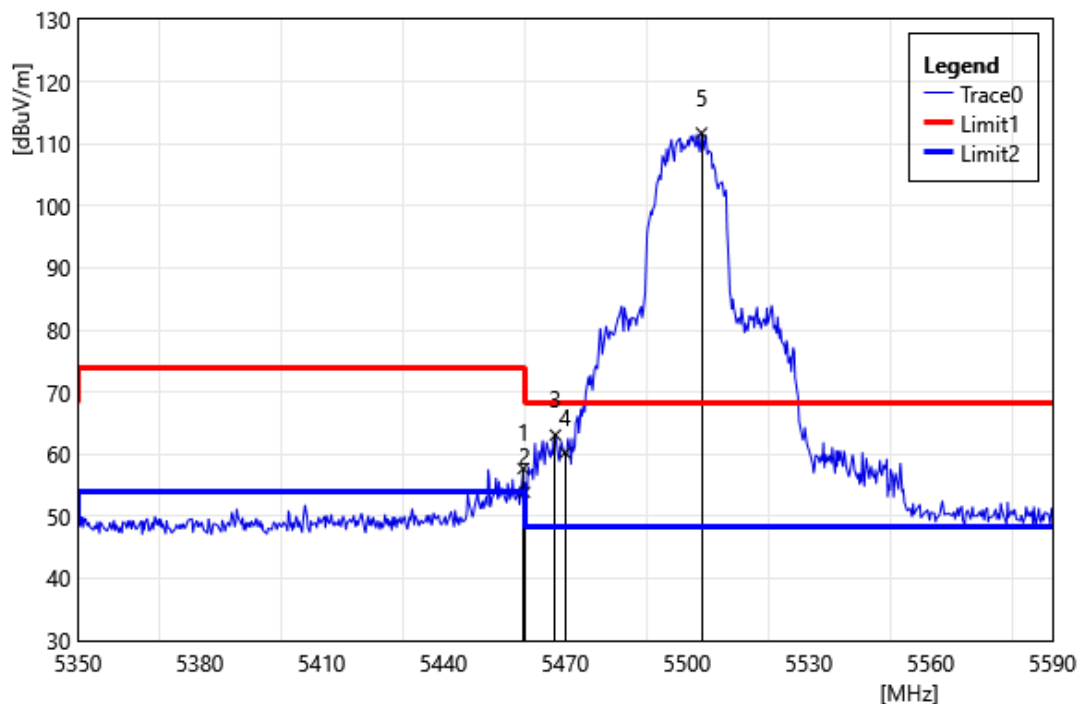


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.68	58.26	-0.57	57.69	74.00	-16.31	PEAK
2	5460.00	54.46	-0.57	53.89	74.00	-20.11	PEAK
3	5467.60	63.66	-0.56	63.10	68.20	-5.10	PEAK
4	5470.00	60.81	-0.56	60.25	68.20	-7.95	PEAK
5	5503.60	112.25	-0.53	111.72	68.20	43.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

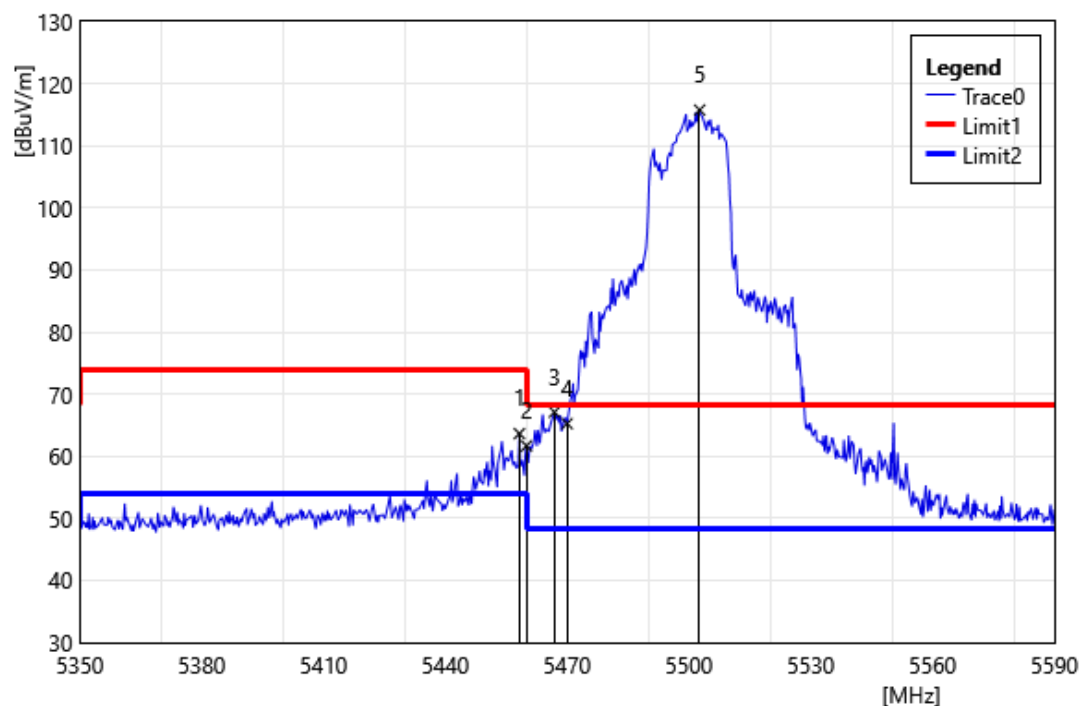


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	64.22	-0.58	63.64	74.00	-10.36	PEAK
2	5460.00	62.24	-0.57	61.67	74.00	-12.33	PEAK
3	5466.88	67.68	-0.57	67.11	68.20	-1.09	PEAK
4	5470.00	65.82	-0.56	65.26	68.20	-2.94	PEAK
5	5502.64	116.30	-0.53	115.77	68.20	47.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

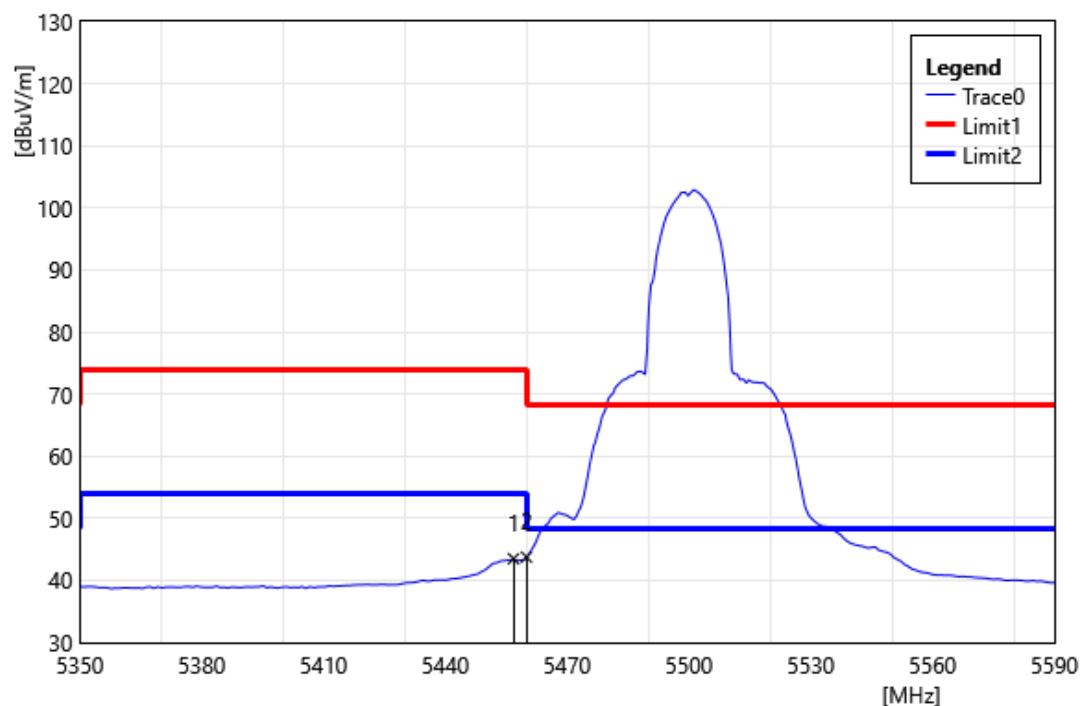


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.80	44.07	-0.58	43.49	54.00	-10.51	AVG
2	5460.00	44.33	-0.57	43.76	54.00	-10.24	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

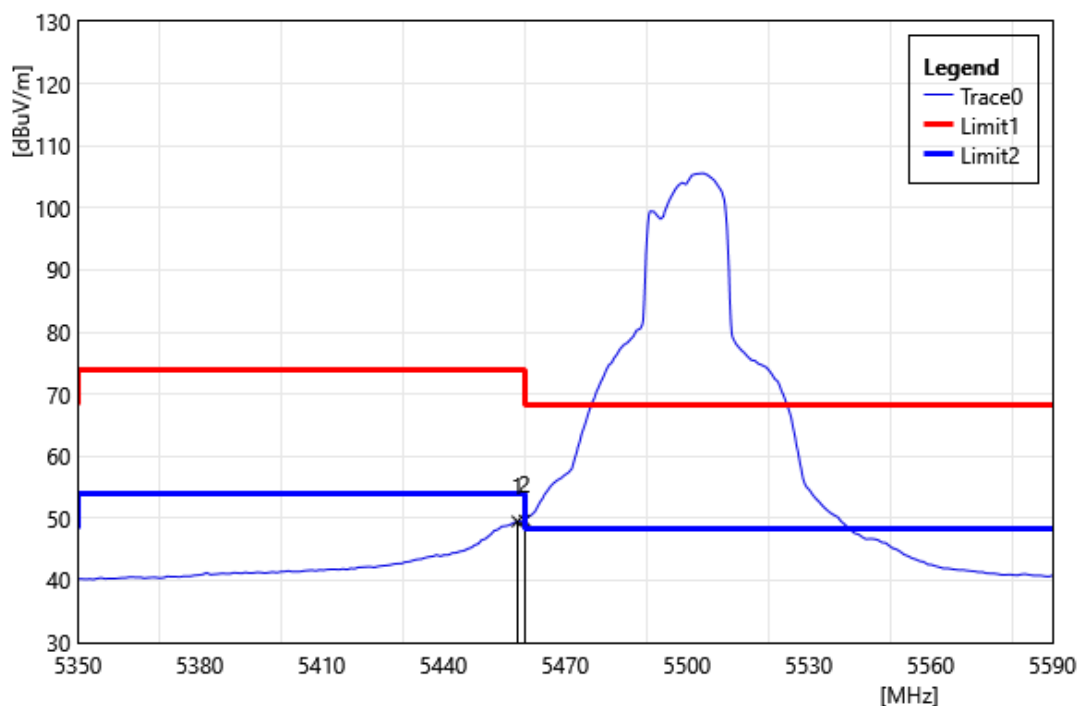


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	50.09	-0.58	49.51	54.00	-4.49	AVG
2	5460.00	50.24	-0.57	49.67	54.00	-4.33	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

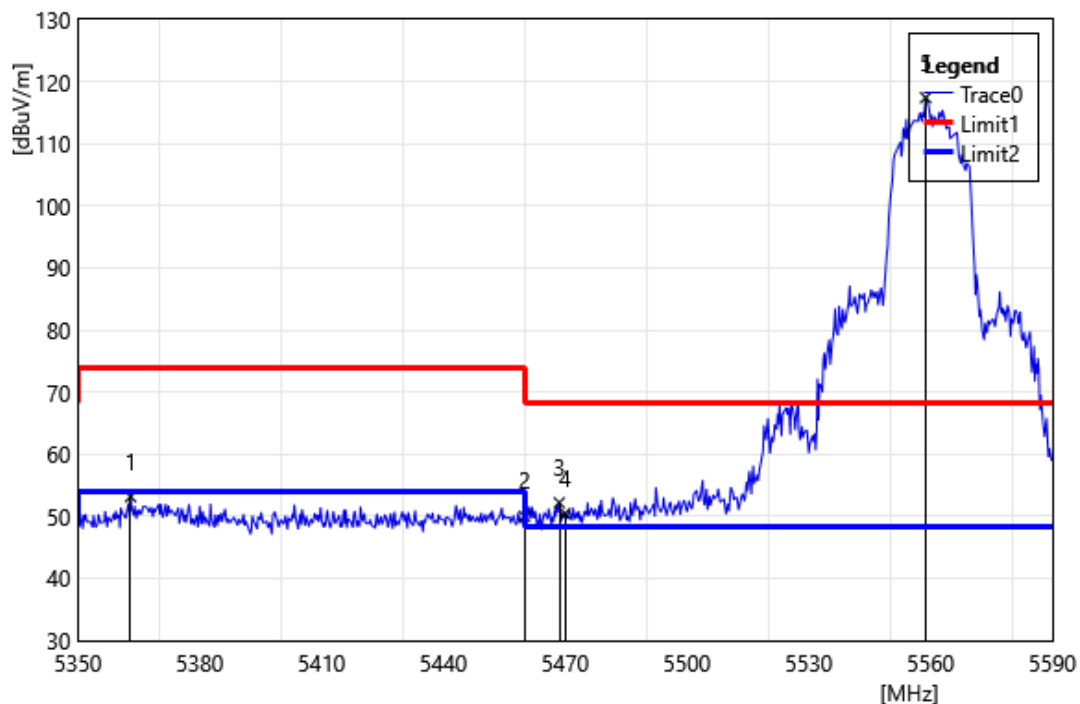


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5362.96	54.38	-1.20	53.18	74.00	-20.82	PEAK
2	5460.00	50.57	-0.57	50.00	74.00	-24.00	PEAK
3	5468.56	52.75	-0.56	52.19	68.20	-16.01	PEAK
4	5470.00	51.00	-0.56	50.44	68.20	-17.76	PEAK
5	5558.80	117.93	-0.51	117.42	68.20	49.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

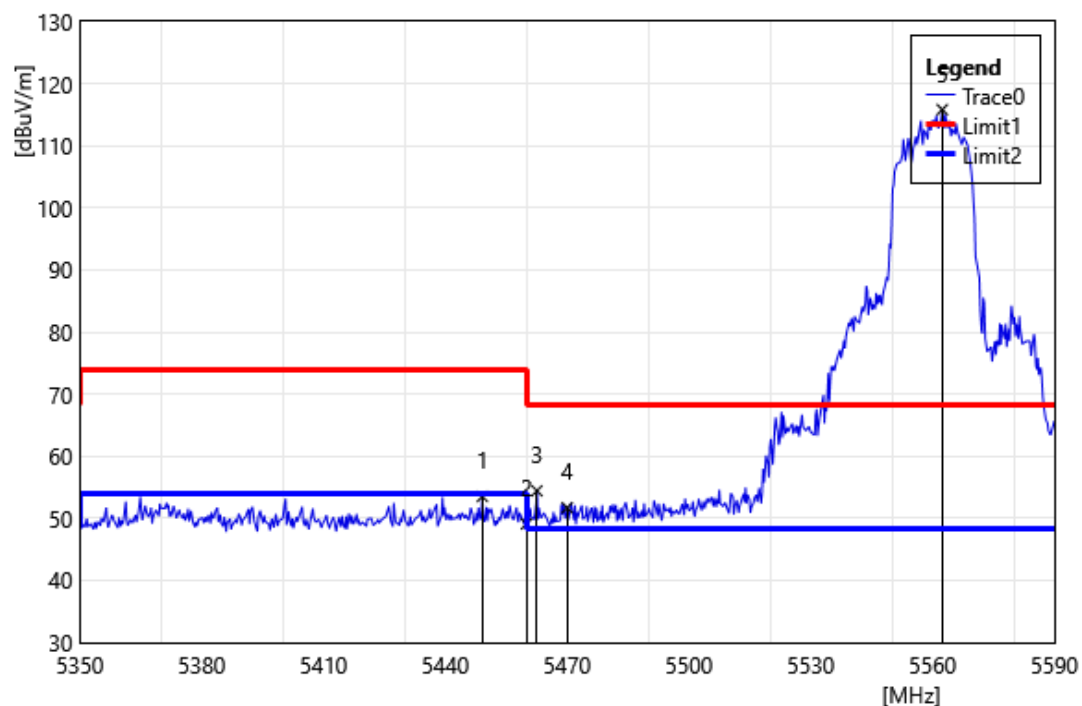


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5449.12	54.11	-0.59	53.52	74.00	-20.48	PEAK
2	5460.00	49.68	-0.57	49.11	74.00	-24.89	PEAK
3	5462.56	55.00	-0.57	54.43	68.20	-13.77	PEAK
4	5470.00	52.26	-0.56	51.70	68.20	-16.50	PEAK
5	5562.40	116.34	-0.52	115.83	68.20	47.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

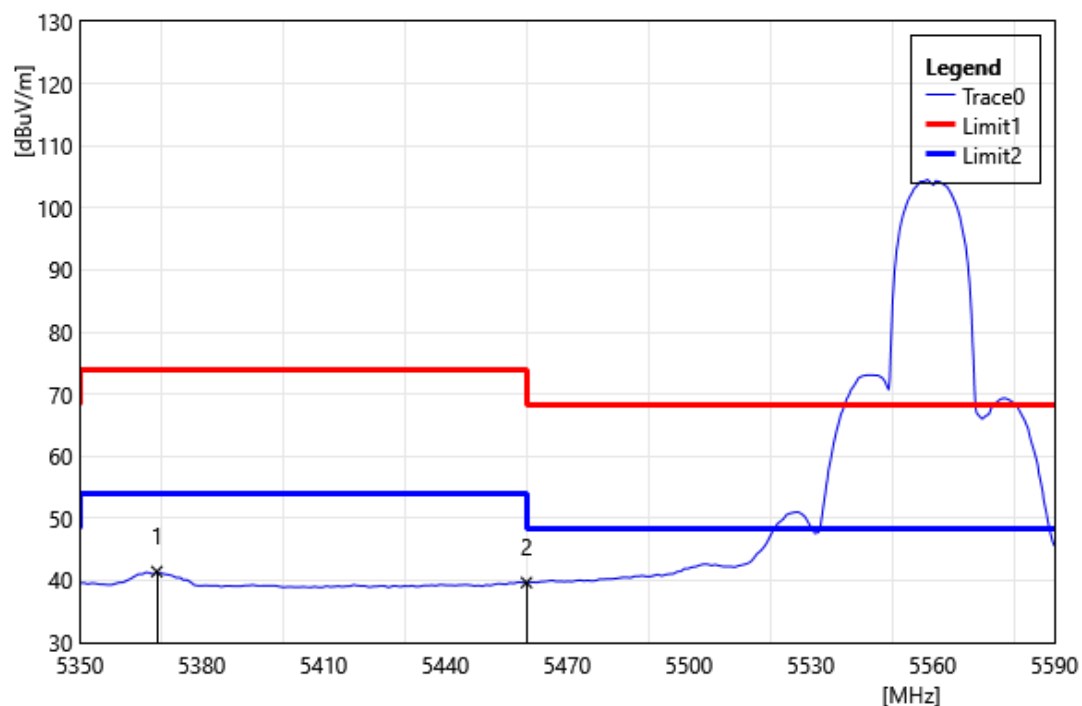


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5368.96	42.58	-1.16	41.42	54.00	-12.58	AVG
2	5460.00	40.23	-0.57	39.66	54.00	-14.34	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

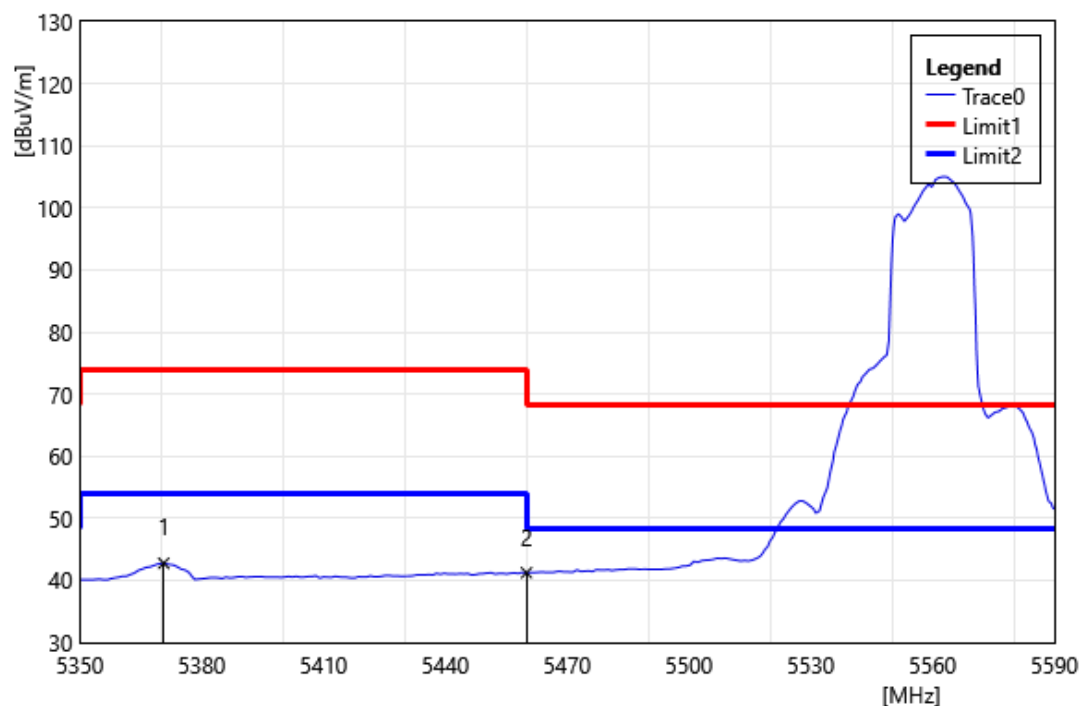


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5370.64	43.92	-1.15	42.78	54.00	-11.23	AVG
2	5460.00	41.81	-0.57	41.24	54.00	-12.76	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

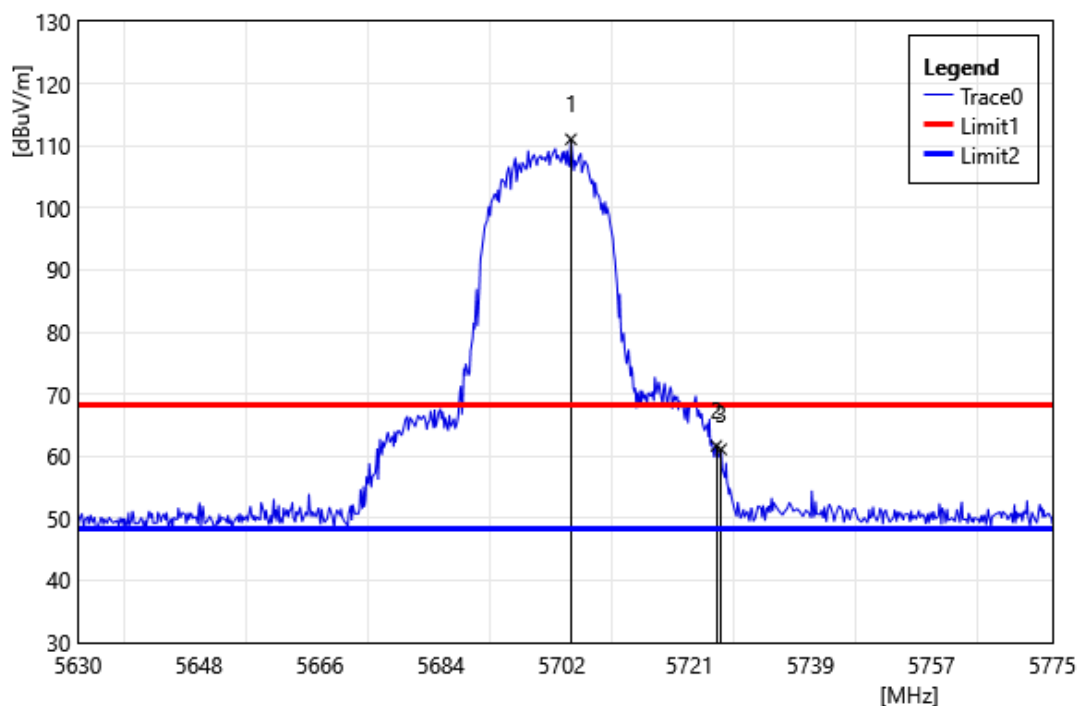


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5703.37	111.63	-0.57	111.06	68.20	42.86	PEAK
2	5725.00	62.00	-0.34	61.66	68.20	-6.54	PEAK
3	5725.70	61.46	-0.34	61.12	68.20	-7.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Horizontal		
Remark:			

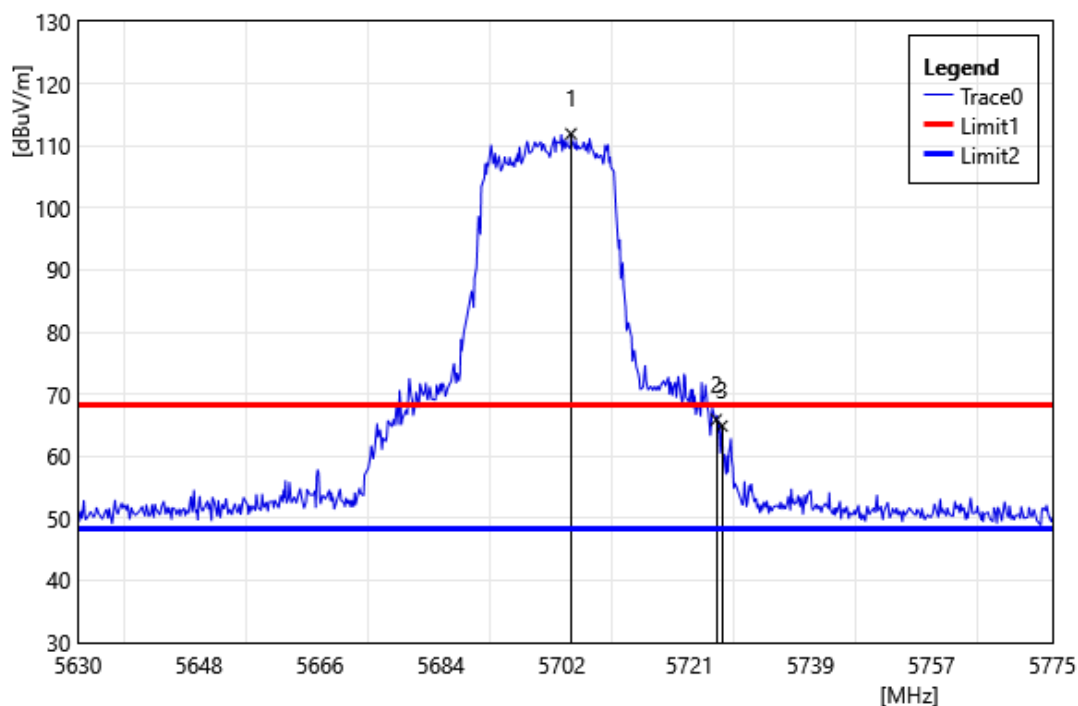


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5703.37	112.50	-0.57	111.93	68.20	43.73	PEAK
2	5725.00	66.22	-0.34	65.88	68.20	-2.32	PEAK
3	5725.85	65.21	-0.34	64.87	68.20	-3.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

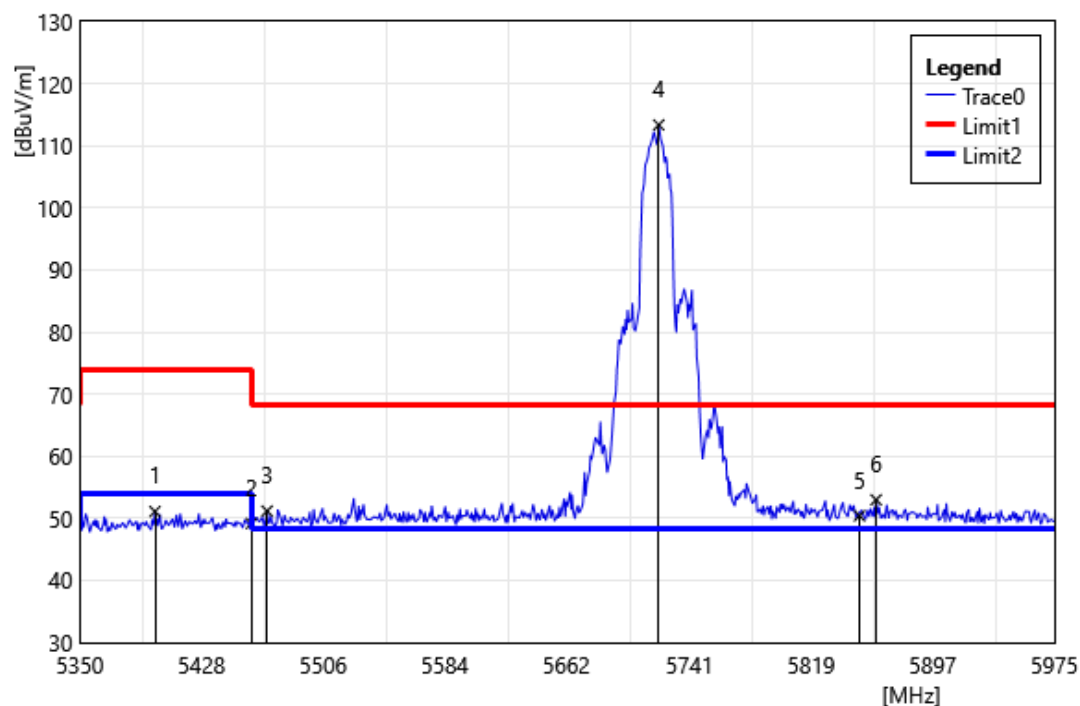


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5398.13	52.05	-0.95	51.10	74.00	-22.90	PEAK
2	5460.00	49.73	-0.57	49.16	74.00	-24.84	PEAK
3	5470.00	51.75	-0.56	51.19	68.20	-17.01	PEAK
4	5721.25	113.73	-0.38	113.35	68.20	45.15	PEAK
5	5850.00	50.14	0.28	50.42	68.20	-17.78	PEAK
6	5860.63	52.68	0.31	52.99	68.20	-15.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

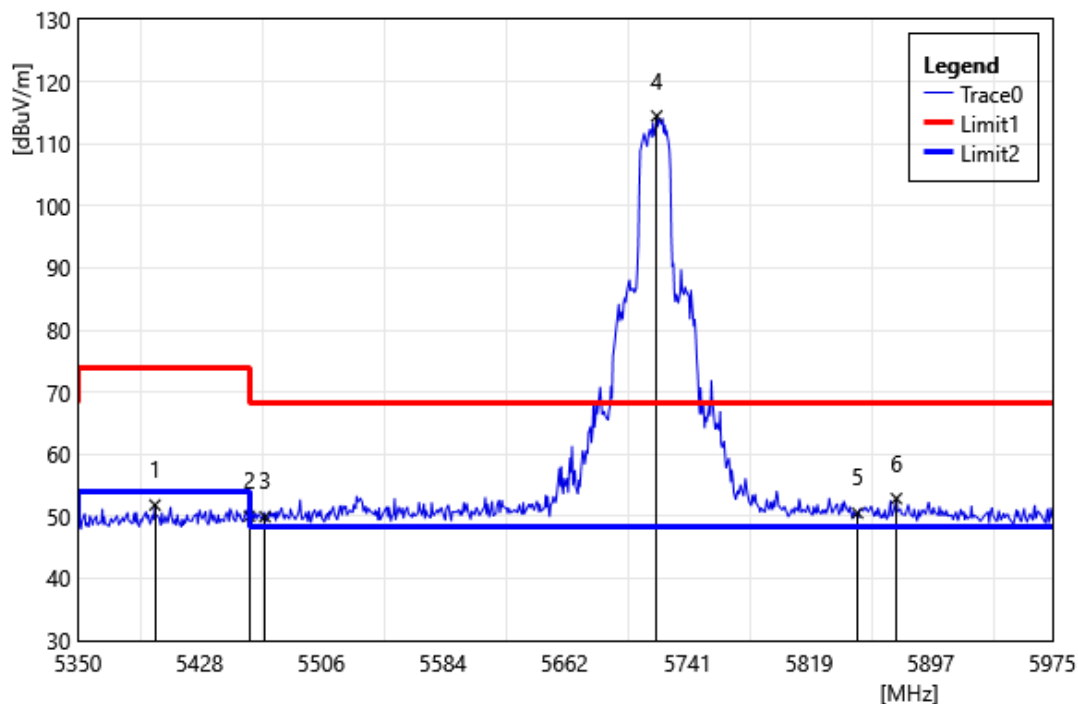


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5399.38	52.76	-0.94	51.82	74.00	-22.18	PEAK
2	5460.00	50.60	-0.57	50.03	74.00	-23.97	PEAK
3	5470.00	50.50	-0.56	49.94	68.20	-18.26	PEAK
4	5721.25	114.85	-0.38	114.47	68.20	46.27	PEAK
5	5850.00	50.27	0.28	50.55	68.20	-17.65	PEAK
6	5875.00	52.52	0.34	52.86	68.20	-15.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

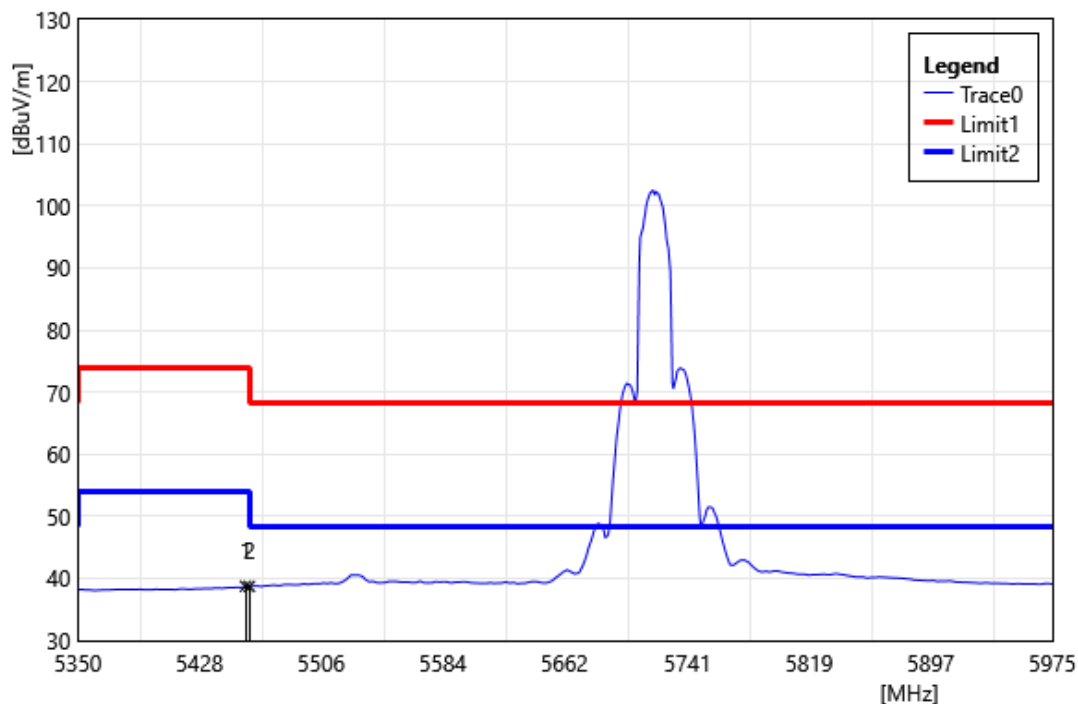


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.50	39.34	-0.58	38.76	54.00	-15.24	AVG
2	5460.00	39.30	-0.57	38.73	54.00	-15.27	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

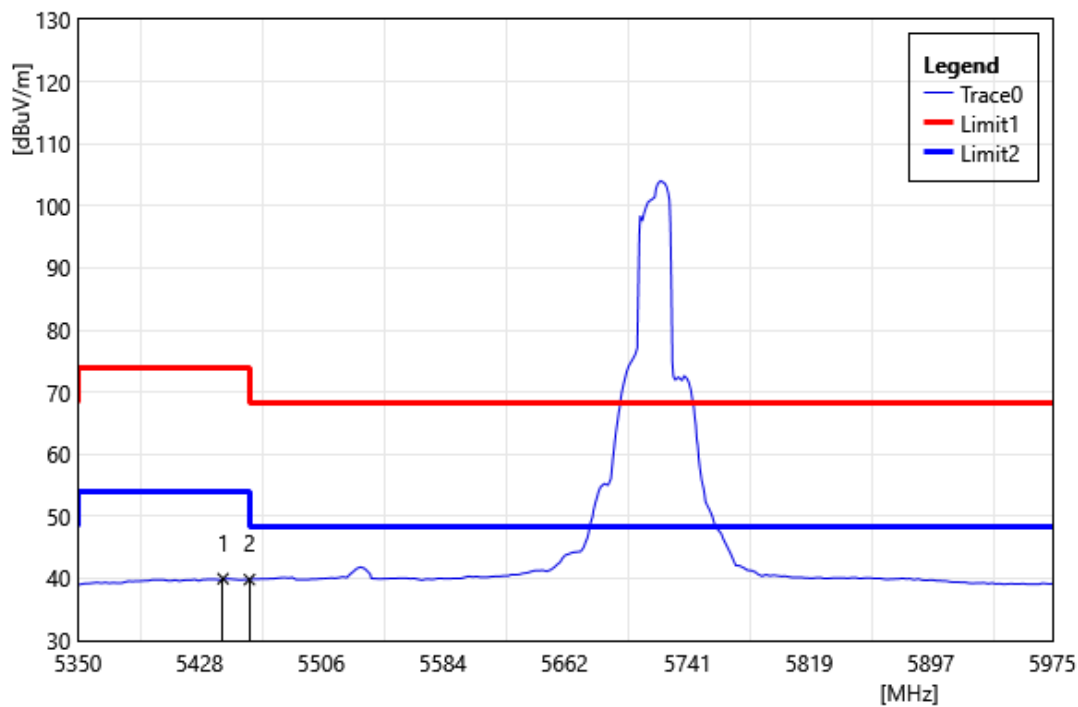


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5443.13	40.58	-0.63	39.95	54.00	-14.05	AVG
2	5460.00	40.39	-0.57	39.82	54.00	-14.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

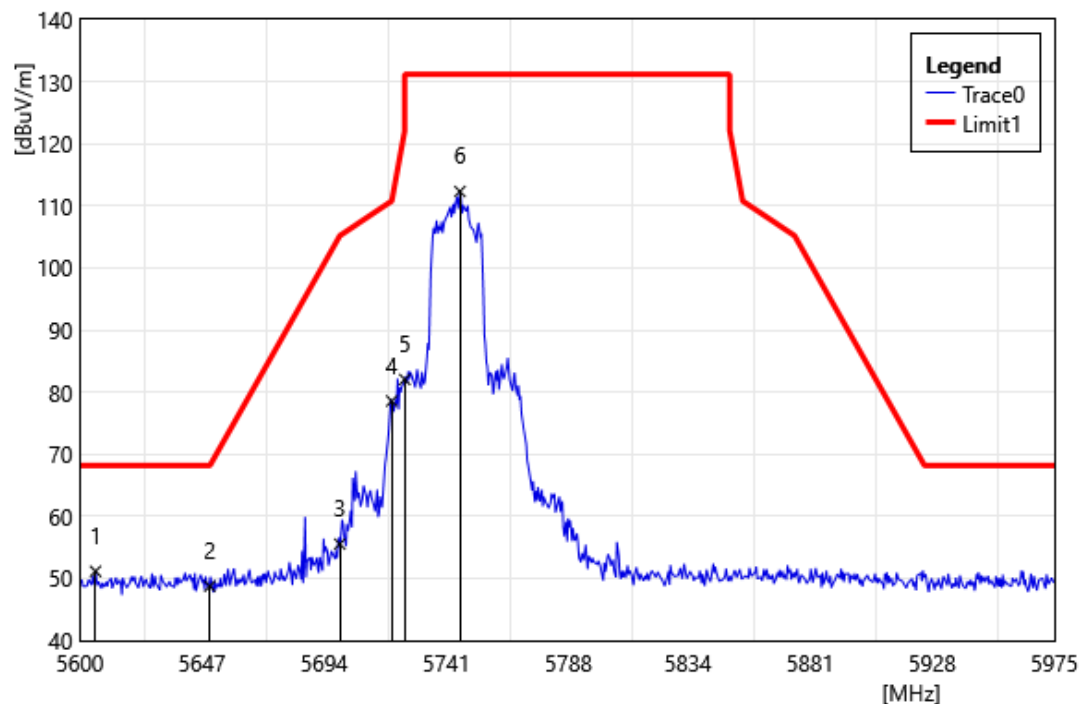


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5606.00	51.73	-0.58	51.15	68.20	-17.05	PEAK
2	5650.00	49.39	-0.64	48.75	68.20	-19.45	PEAK
3	5700.00	56.15	-0.61	55.54	105.20	-49.66	PEAK
4	5720.00	78.98	-0.40	78.58	110.80	-32.22	PEAK
5	5725.00	82.38	-0.34	82.04	122.20	-40.16	PEAK
6	5746.25	112.45	-0.12	112.33	131.20	-18.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

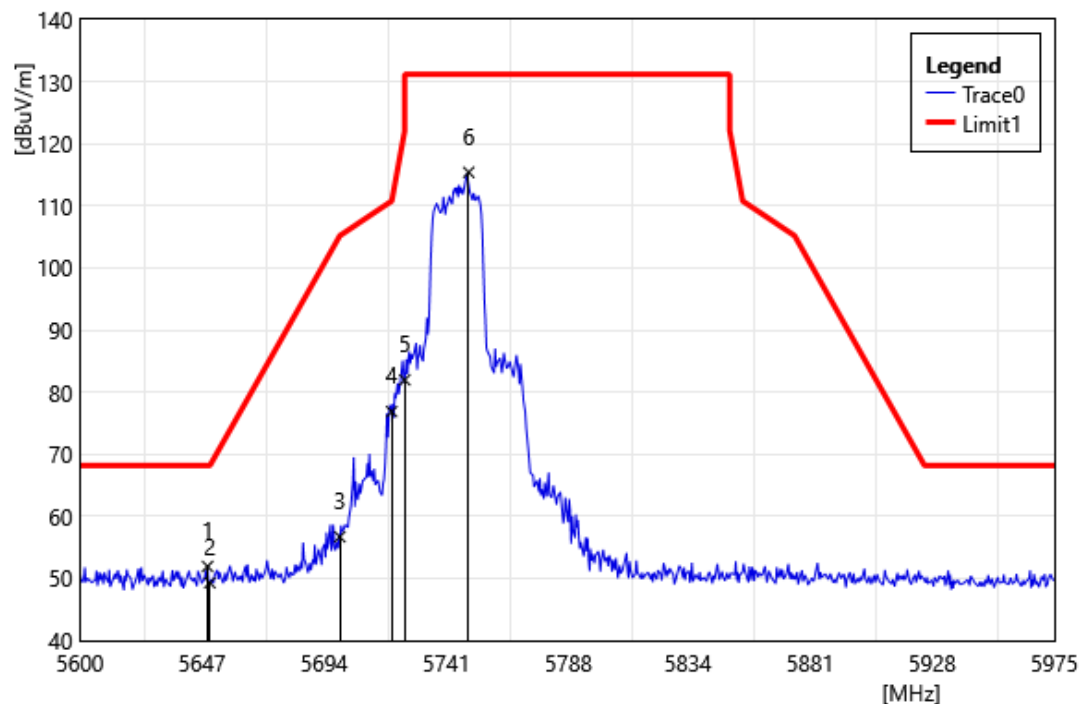


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5649.13	52.57	-0.64	51.93	68.20	-16.27	PEAK
2	5650.00	49.93	-0.64	49.29	68.20	-18.91	PEAK
3	5700.00	57.32	-0.61	56.71	105.20	-48.49	PEAK
4	5720.00	77.28	-0.40	76.88	110.80	-33.92	PEAK
5	5725.00	82.32	-0.34	81.98	122.20	-40.22	PEAK
6	5749.63	115.49	-0.08	115.41	131.20	-15.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

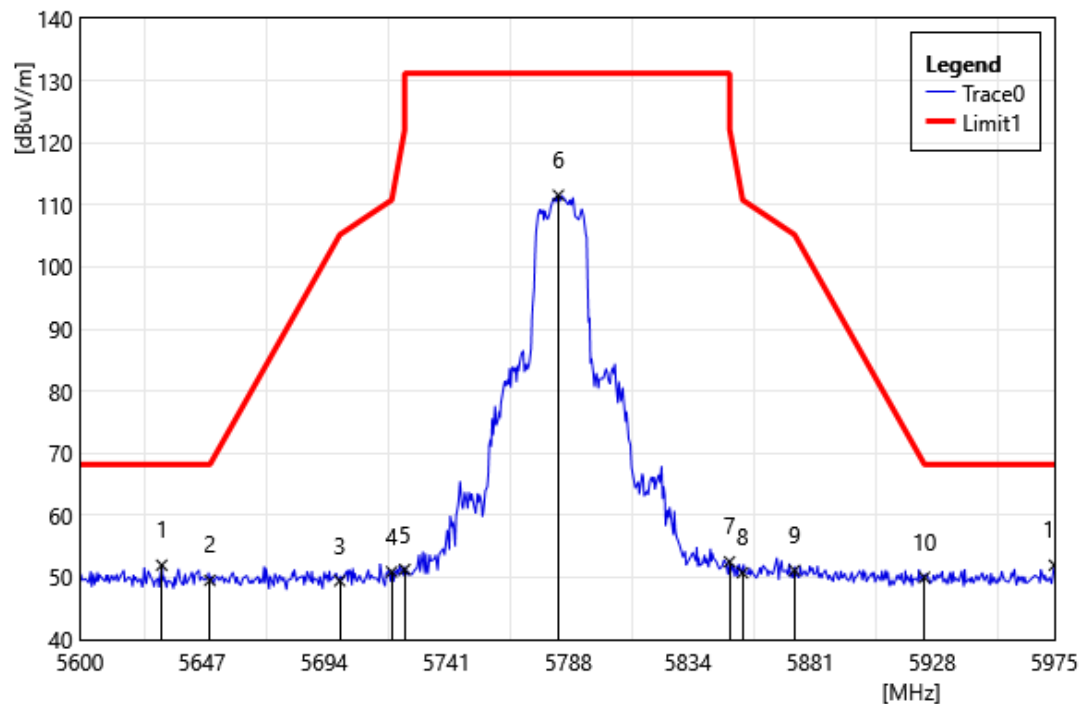


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5631.50	52.58	-0.61	51.97	68.20	-16.23	PEAK
2	5650.00	50.17	-0.64	49.53	68.20	-18.67	PEAK
3	5700.00	50.07	-0.61	49.46	105.20	-55.74	PEAK
4	5720.00	51.32	-0.40	50.92	110.80	-59.88	PEAK
5	5725.00	51.61	-0.34	51.27	122.20	-70.93	PEAK
6	5784.13	111.48	0.08	111.56	131.20	-19.64	PEAK
7	5850.00	52.23	0.28	52.51	122.20	-69.69	PEAK
8	5855.00	50.46	0.29	50.75	110.80	-60.05	PEAK
9	5875.00	50.80	0.34	51.14	105.20	-54.06	PEAK
10	5925.00	49.72	0.28	50.00	68.20	-18.20	PEAK
11	5975.00	51.77	0.20	51.97	68.20	-16.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

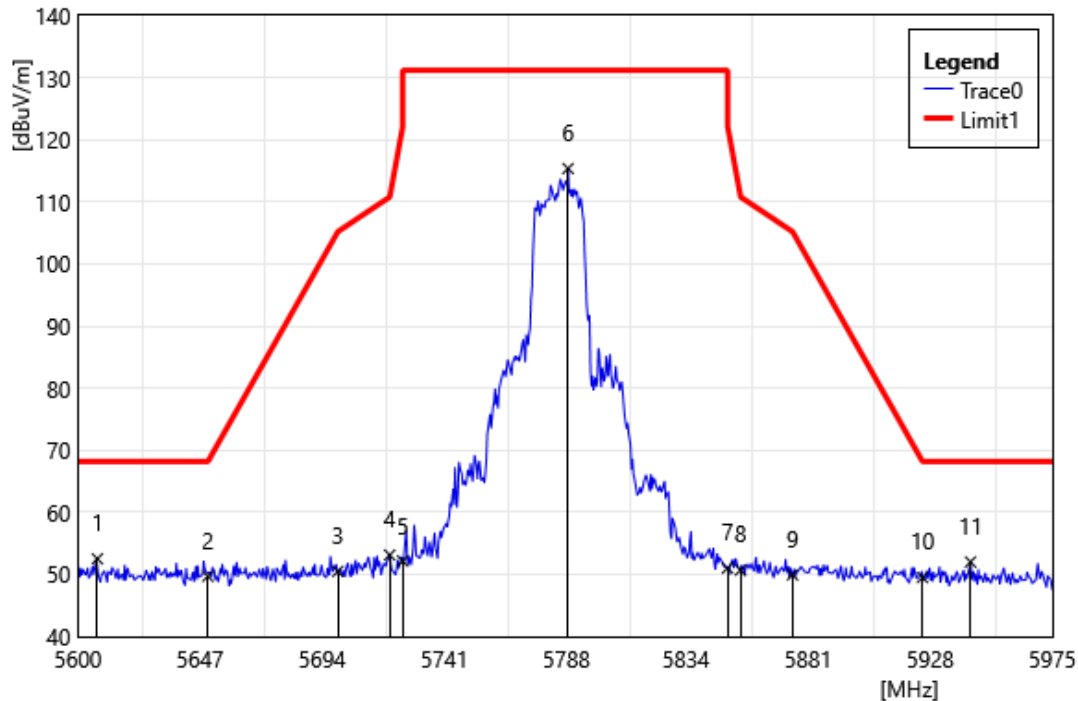


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5607.50	53.10	-0.58	52.52	68.20	-15.68	PEAK
2	5650.00	50.35	-0.64	49.71	68.20	-18.49	PEAK
3	5700.00	51.11	-0.61	50.50	105.20	-54.70	PEAK
4	5720.00	53.54	-0.40	53.14	110.80	-57.66	PEAK
5	5725.00	52.51	-0.34	52.17	122.20	-70.03	PEAK
6	5788.63	115.26	0.10	115.36	131.20	-15.84	PEAK
7	5850.00	50.75	0.28	51.03	122.20	-71.17	PEAK
8	5855.00	50.42	0.29	50.71	110.80	-60.09	PEAK
9	5875.00	49.60	0.34	49.94	105.20	-55.26	PEAK
10	5925.00	49.23	0.28	49.51	68.20	-18.69	PEAK
11	5943.50	51.83	0.18	52.01	68.20	-16.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

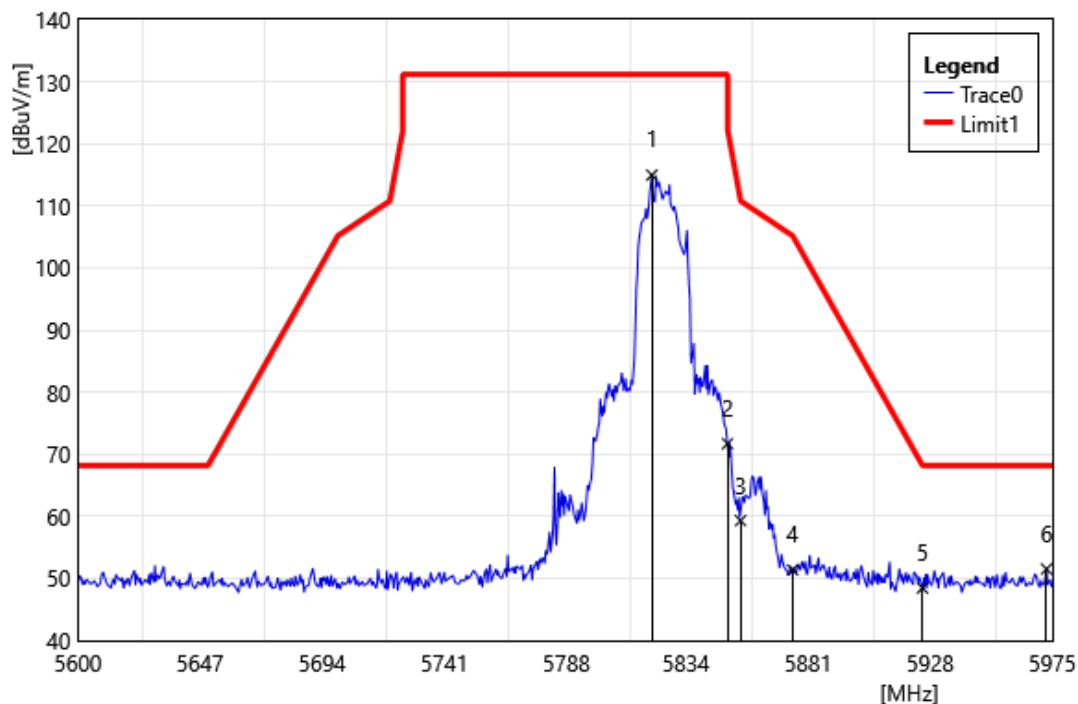


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5820.88	114.75	0.20	114.95	131.20	-16.25	PEAK
2	5850.00	71.43	0.28	71.71	122.20	-50.49	PEAK
3	5855.00	59.02	0.29	59.31	110.80	-51.49	PEAK
4	5875.00	51.04	0.34	51.38	105.20	-53.82	PEAK
5	5925.00	48.18	0.28	48.46	68.20	-19.74	PEAK
6	5972.75	51.32	0.20	51.52	68.20	-16.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

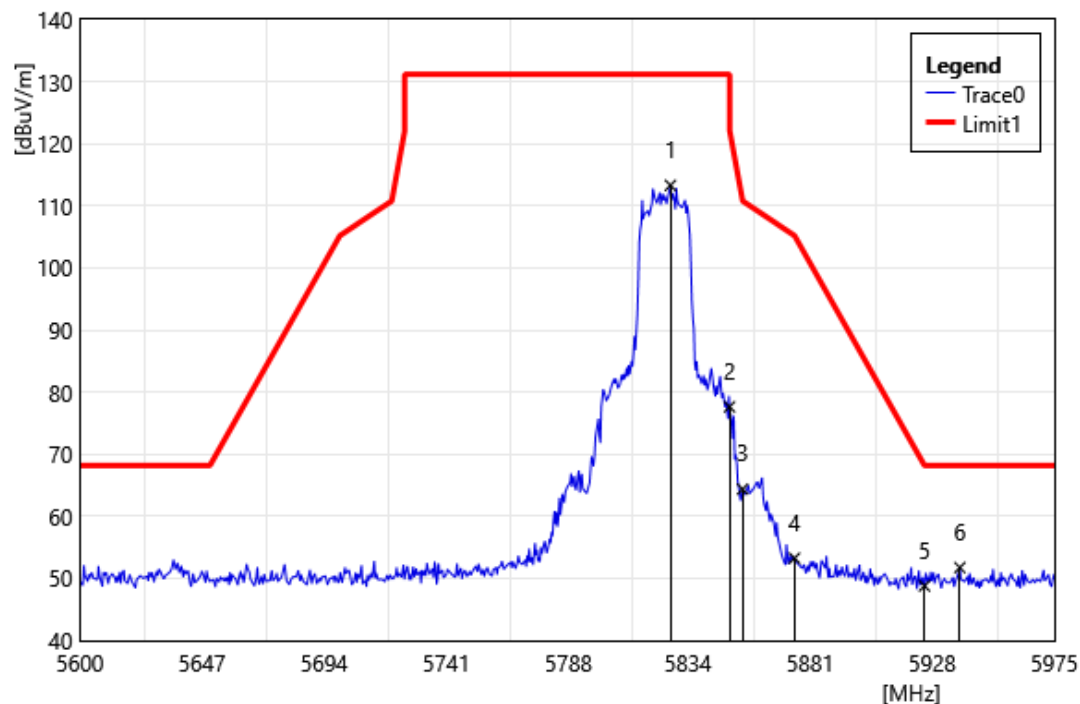


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5827.25	113.09	0.22	113.31	131.20	-17.89	PEAK
2	5850.00	77.36	0.28	77.64	122.20	-44.56	PEAK
3	5855.00	64.09	0.29	64.38	110.80	-46.42	PEAK
4	5875.00	52.92	0.34	53.26	105.20	-51.94	PEAK
5	5925.00	48.52	0.28	48.80	68.20	-19.40	PEAK
6	5938.63	51.54	0.20	51.74	68.20	-16.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

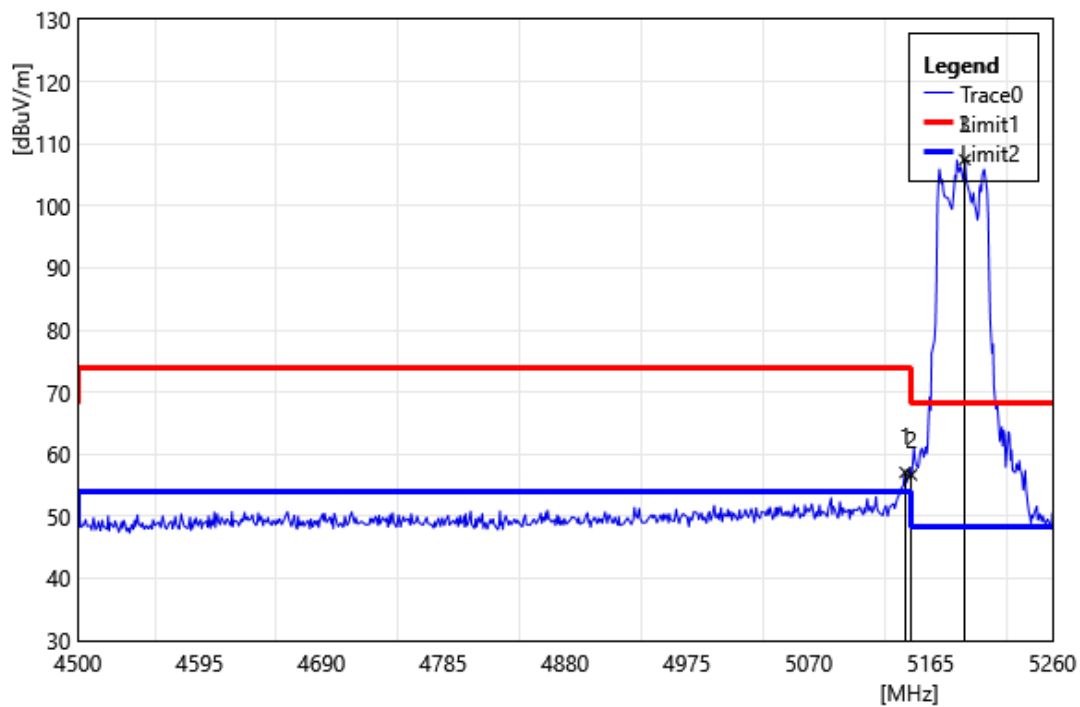


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	57.98	-0.90	57.08	74.00	-16.93	PEAK
2	5150.00	57.59	-0.91	56.68	74.00	-17.32	PEAK
3	5191.60	108.56	-1.11	107.45	68.20	39.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

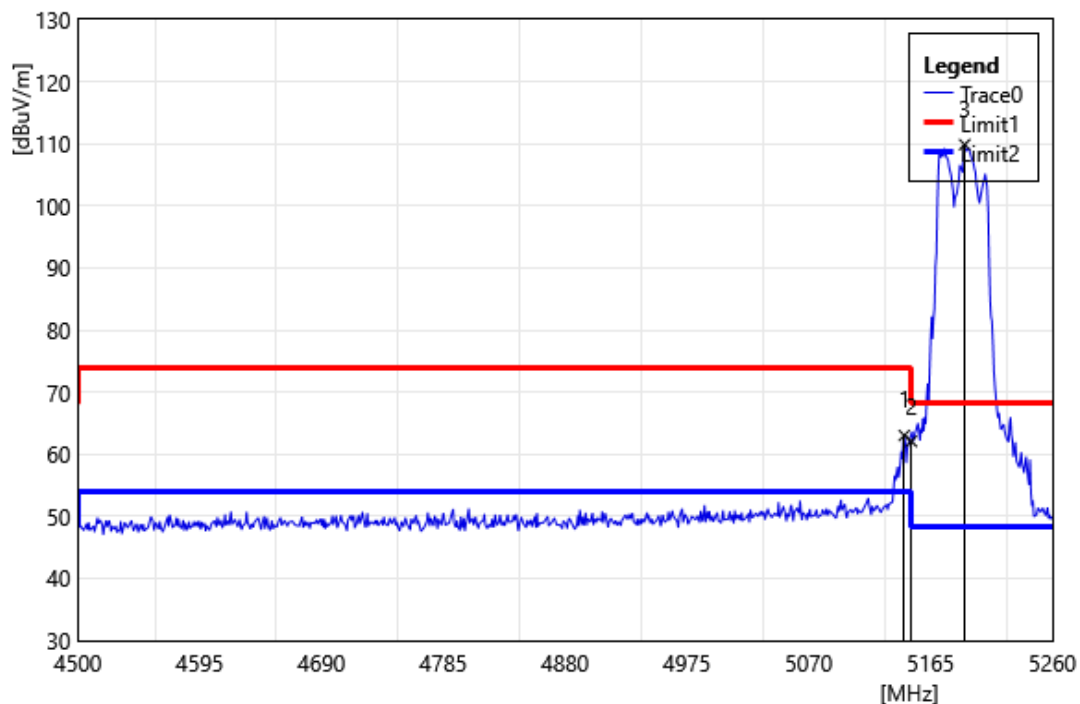


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	63.92	-0.90	63.02	74.00	-10.98	PEAK
2	5150.00	63.00	-0.91	62.09	74.00	-11.91	PEAK
3	5191.60	110.97	-1.11	109.86	68.20	41.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

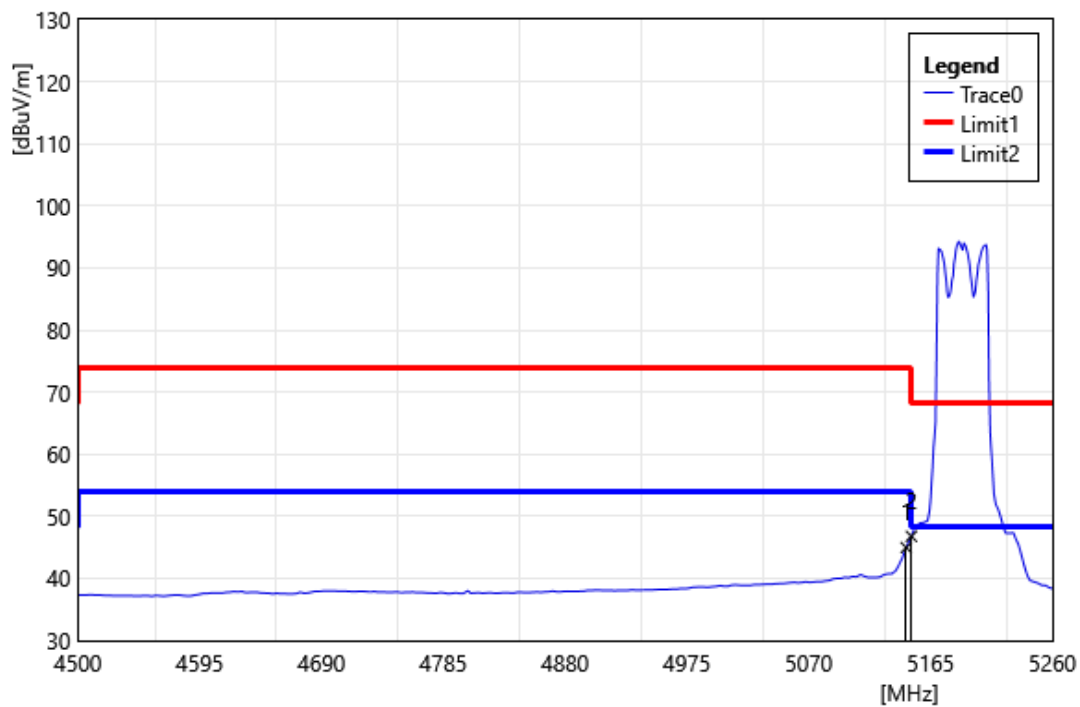


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	45.88	-0.90	44.98	54.00	-9.02	AVG
2	5150.00	47.70	-0.91	46.79	54.00	-7.21	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

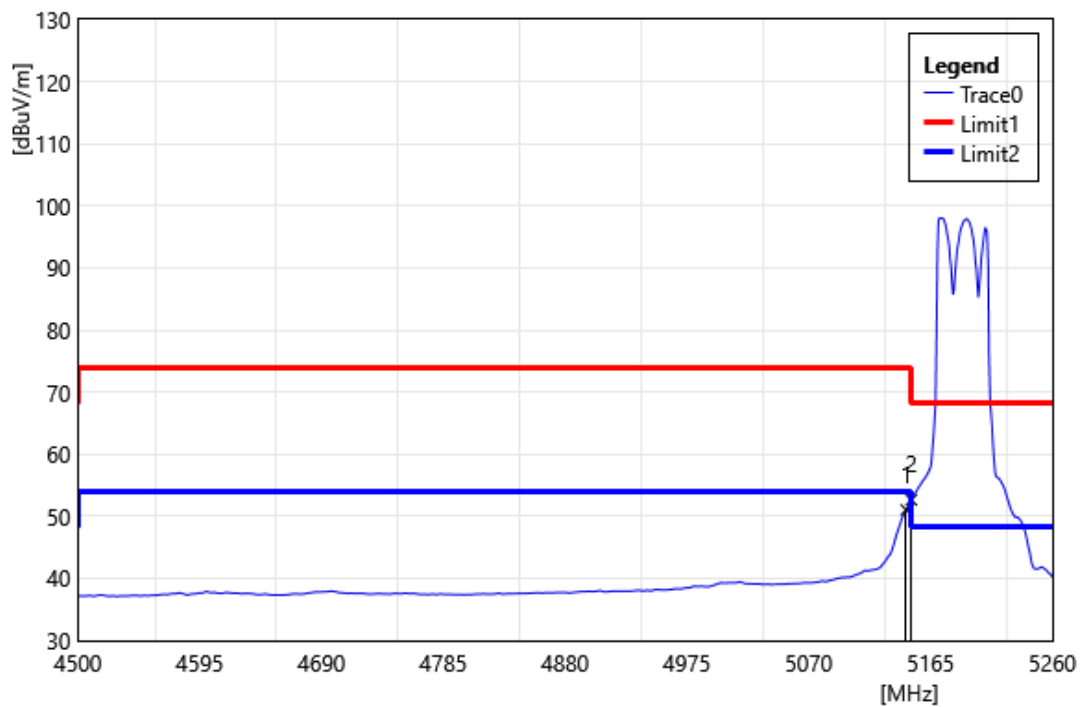


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	51.94	-0.90	51.04	54.00	-2.96	AVG
2	5150.00	53.56	-0.91	52.65	54.00	-1.35	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

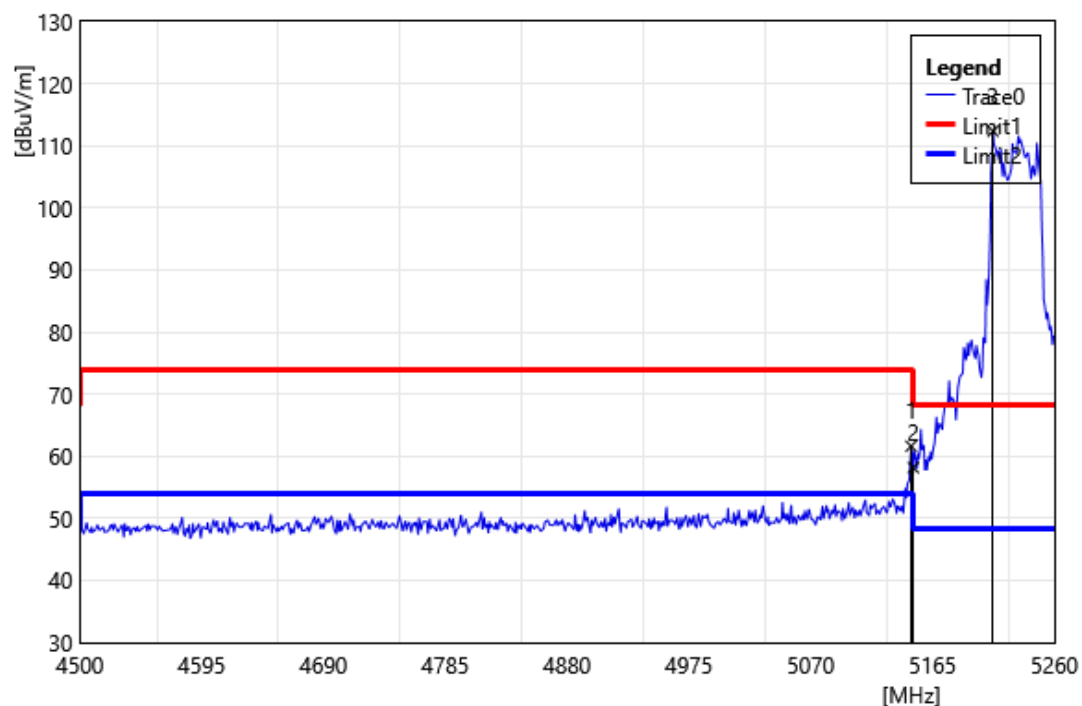


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	62.54	-0.91	61.63	74.00	-12.37	PEAK
2	5150.00	59.07	-0.91	58.16	74.00	-15.84	PEAK
3	5212.12	113.60	-1.24	112.36	68.20	44.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

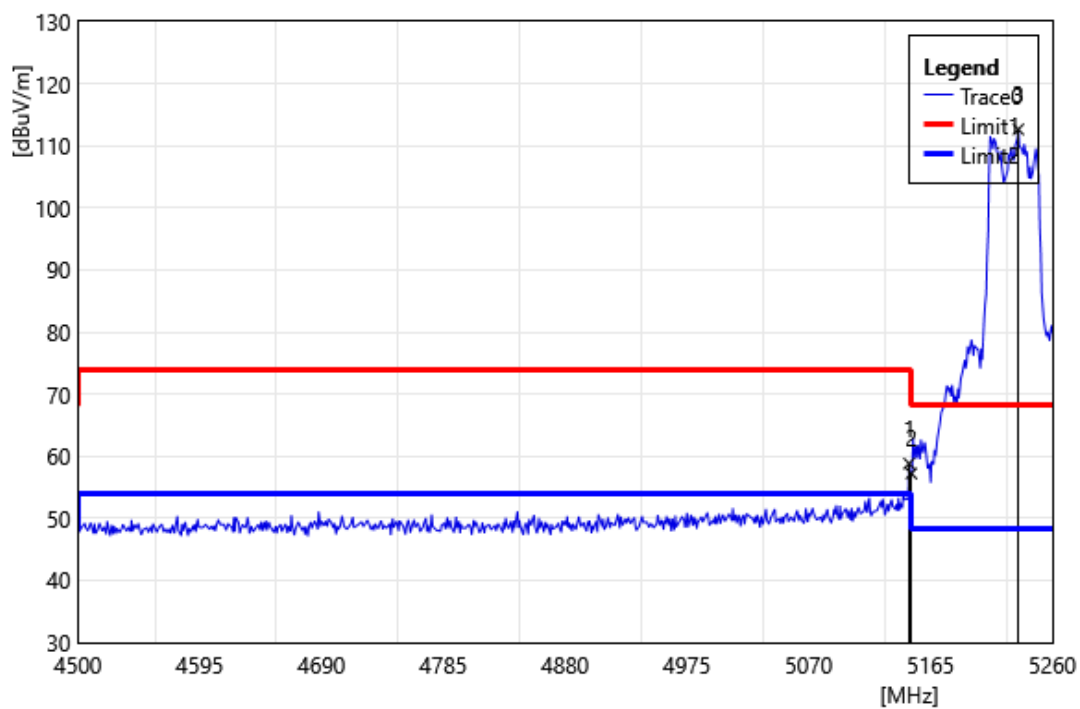


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5148.28	59.73	-0.91	58.82	74.00	-15.18	PEAK
2	5150.00	58.13	-0.91	57.23	74.00	-16.77	PEAK
3	5233.40	114.04	-1.39	112.65	68.20	44.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

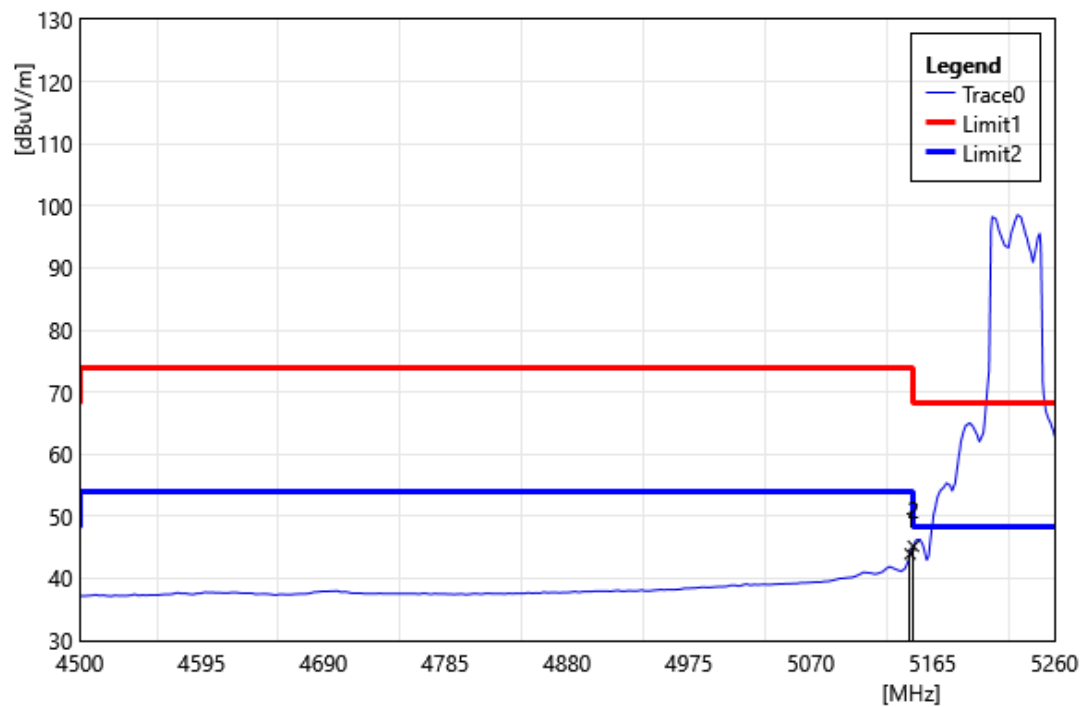


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	44.86	-0.91	43.95	54.00	-10.05	AVG
2	5150.00	46.10	-0.91	45.19	54.00	-8.81	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

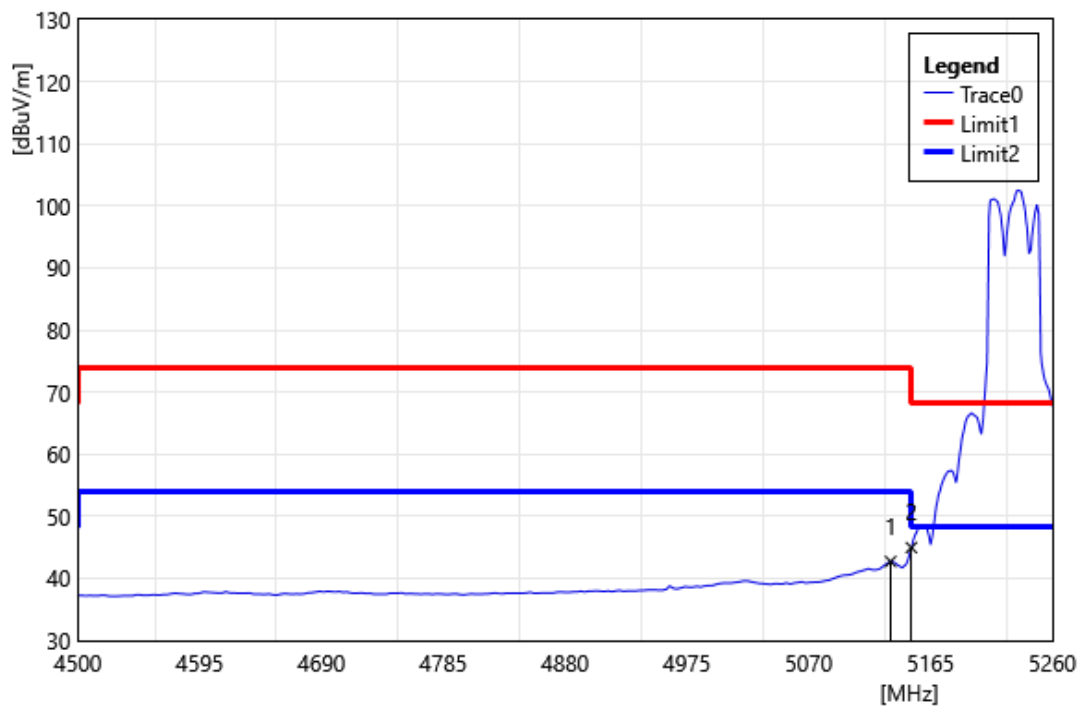


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5133.84	43.63	-0.89	42.74	54.00	-11.26	AVG
2	5150.00	45.87	-0.91	44.96	54.00	-9.04	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

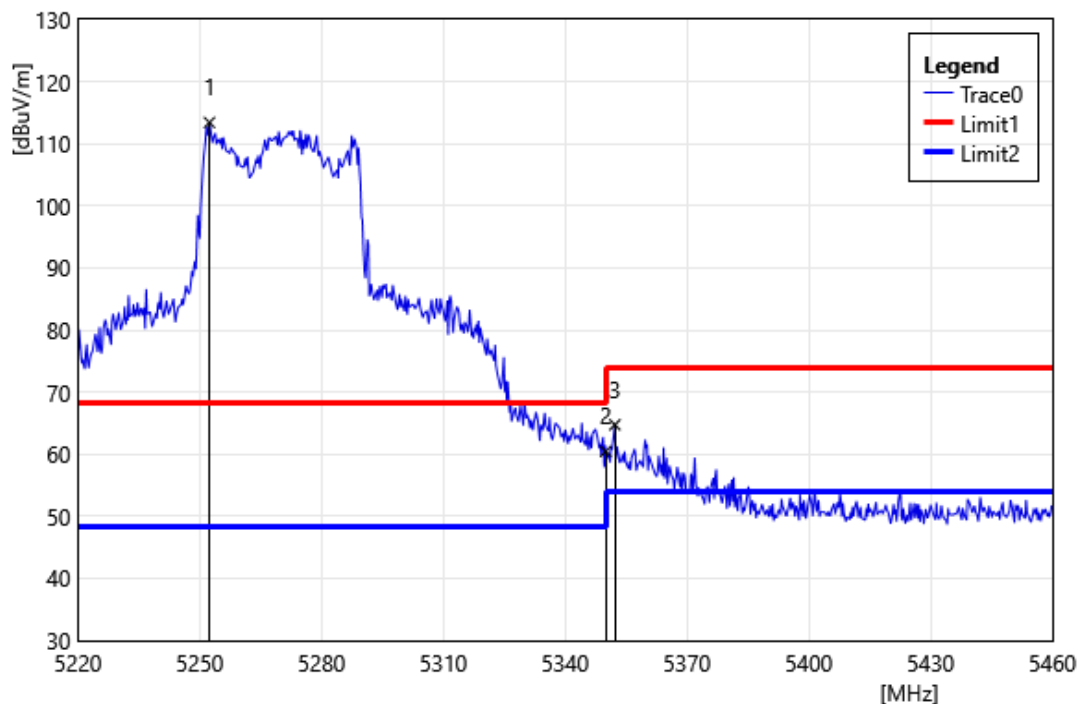


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5252.40	114.94	-1.51	113.43	68.20	45.23	PEAK
2	5350.00	61.75	-1.29	60.46	74.00	-13.54	PEAK
3	5352.24	66.02	-1.28	64.74	74.00	-9.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

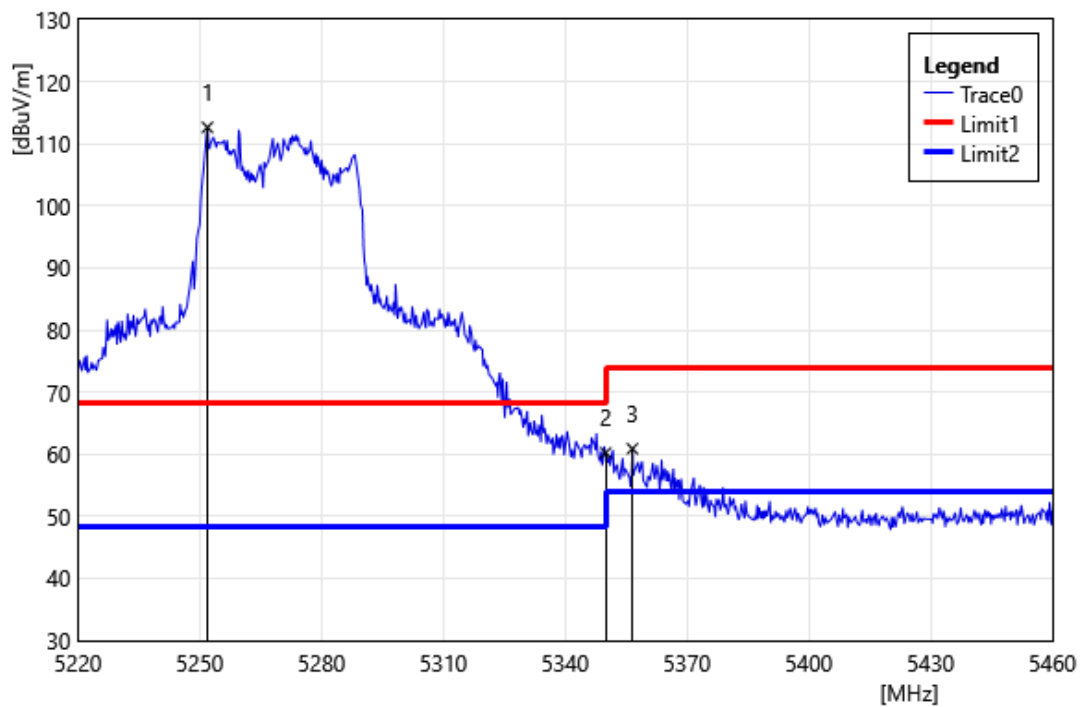


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5251.92	114.15	-1.51	112.64	68.20	44.44	PEAK
2	5350.00	61.52	-1.29	60.23	74.00	-13.77	PEAK
3	5356.56	62.13	-1.25	60.88	74.00	-13.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

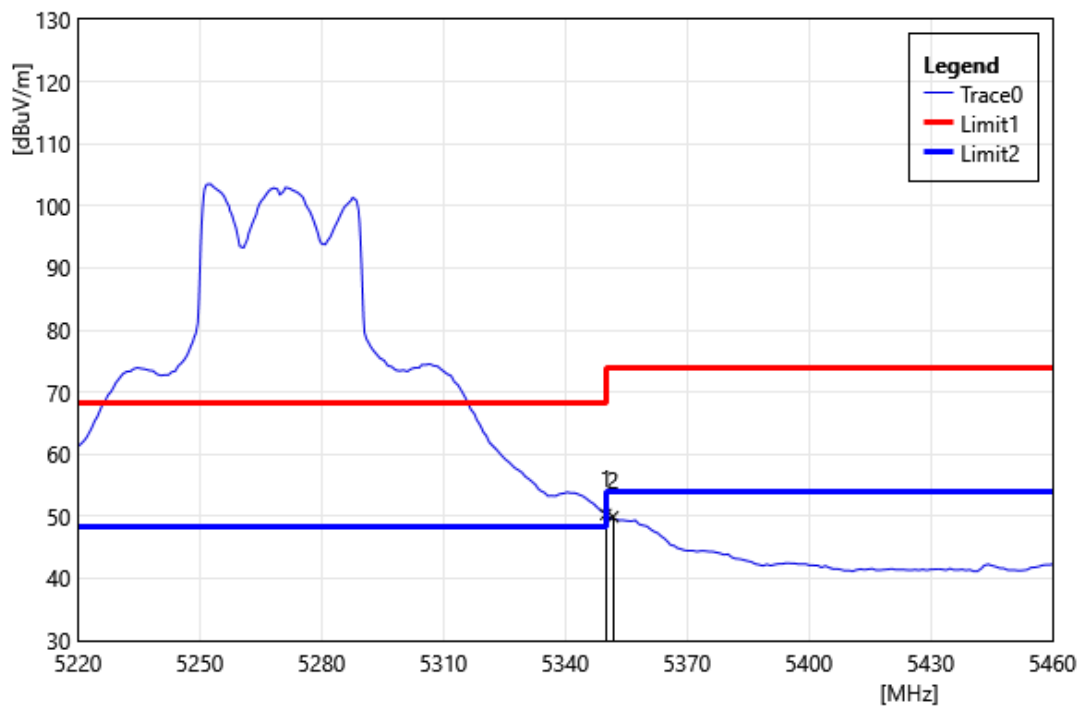


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	51.61	-1.29	50.31	54.00	-3.69	AVG
2	5351.76	51.21	-1.28	49.93	54.00	-4.07	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

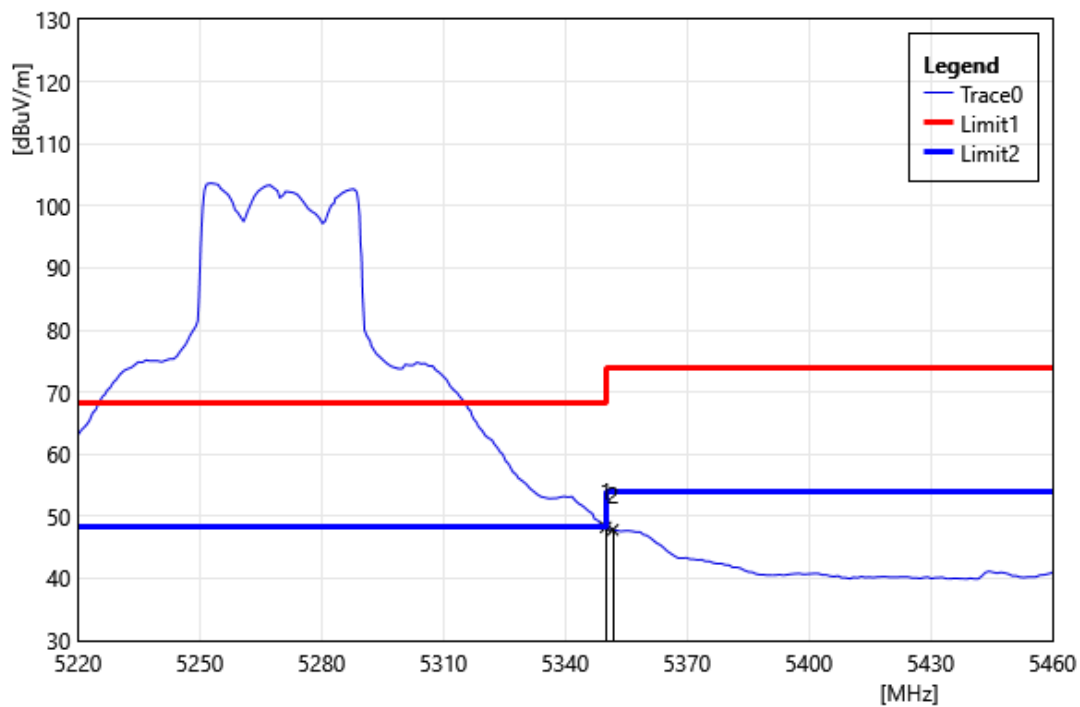


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	49.54	-1.29	48.25	54.00	-5.75	AVG
2	5351.76	49.10	-1.28	47.82	54.00	-6.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

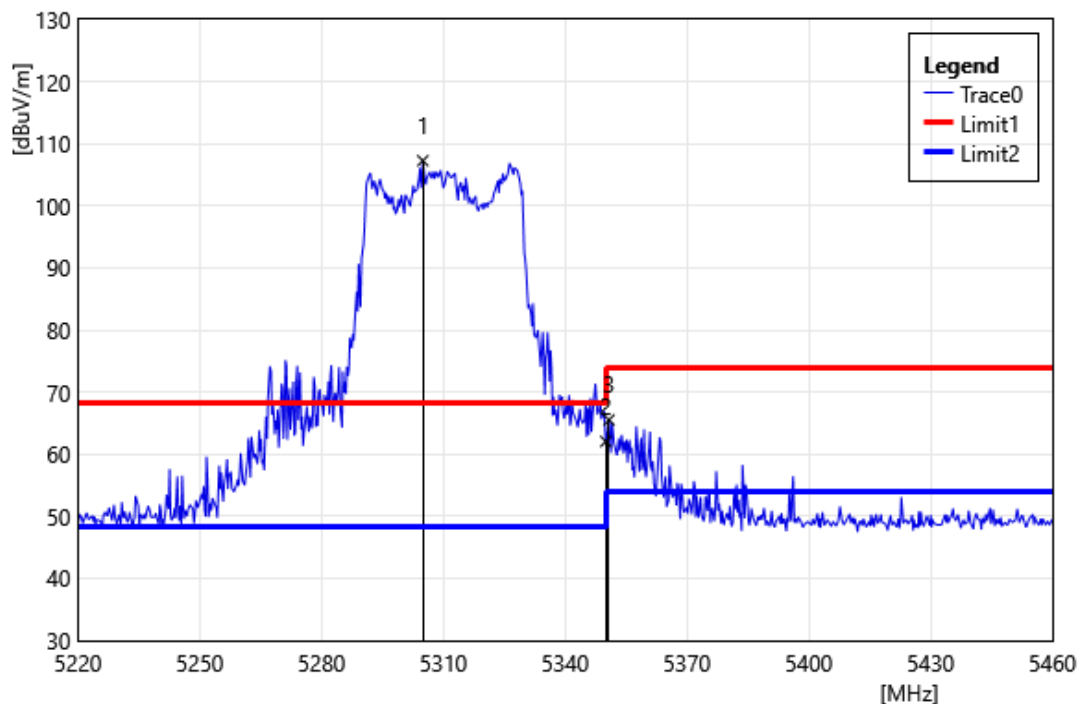


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5304.96	108.86	-1.59	107.28	68.20	39.08	PEAK
2	5350.00	63.34	-1.27	62.06	74.00	-11.94	PEAK
3	5350.80	66.79	-1.27	65.52	74.00	-8.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

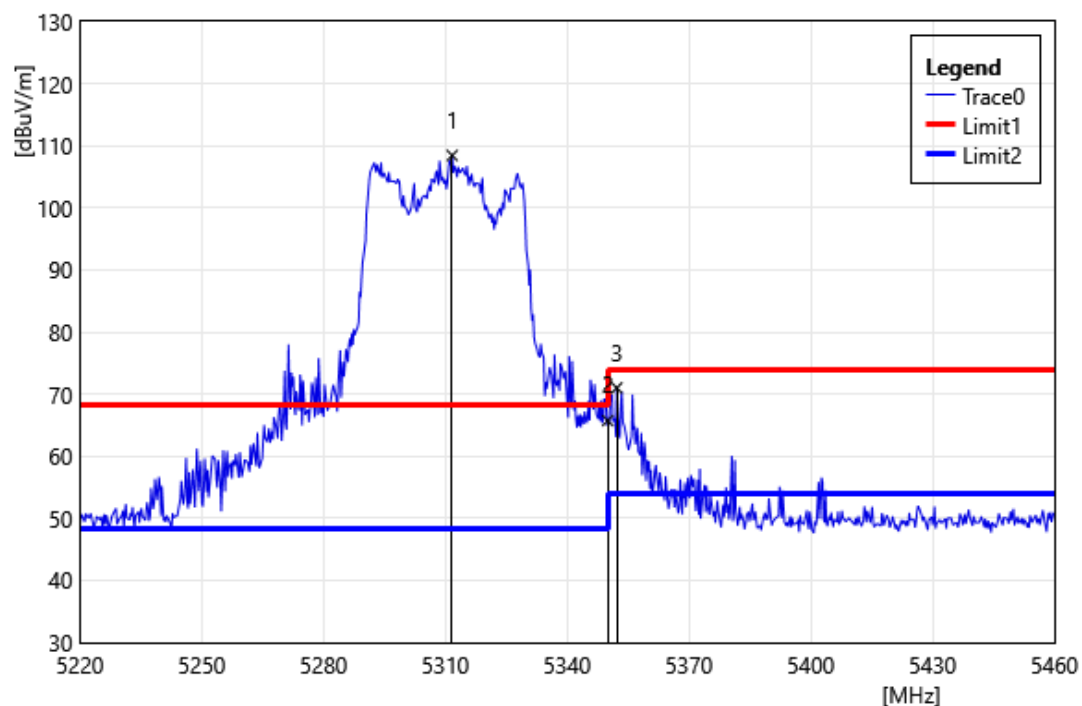


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5311.68	109.99	-1.54	108.45	68.20	40.25	PEAK
2	5350.00	67.01	-1.27	65.74	74.00	-8.26	PEAK
3	5352.24	72.27	-1.26	71.01	74.00	-2.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

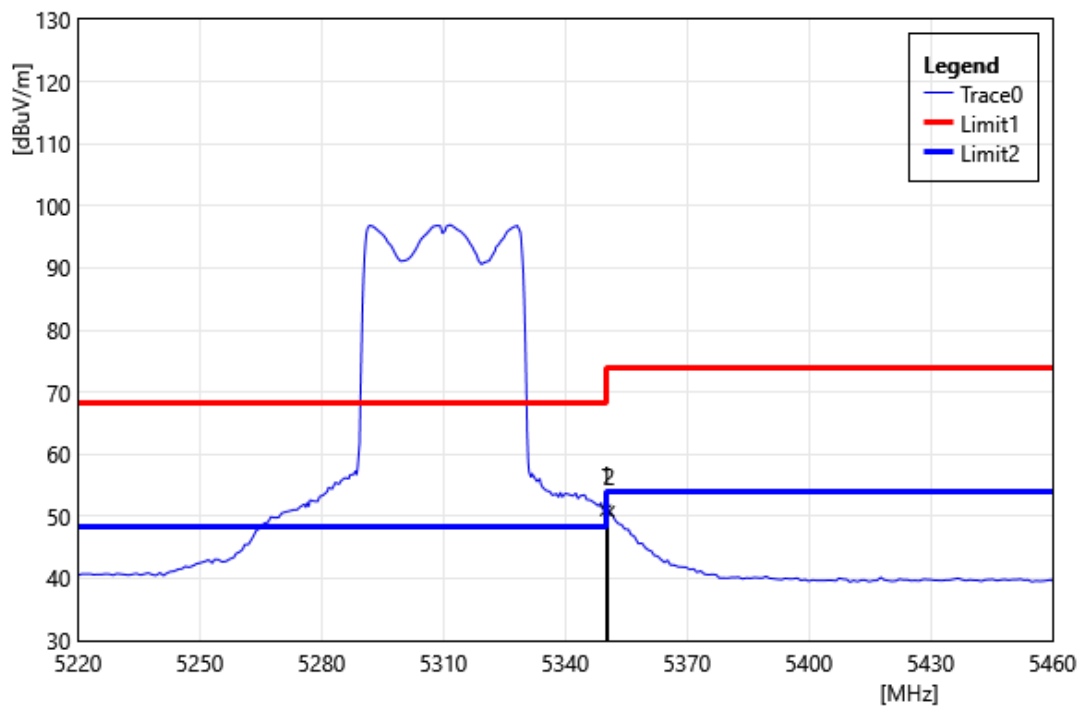


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	52.25	-1.27	50.98	54.00	-3.02	AVG
2	5350.80	52.03	-1.27	50.76	54.00	-3.24	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

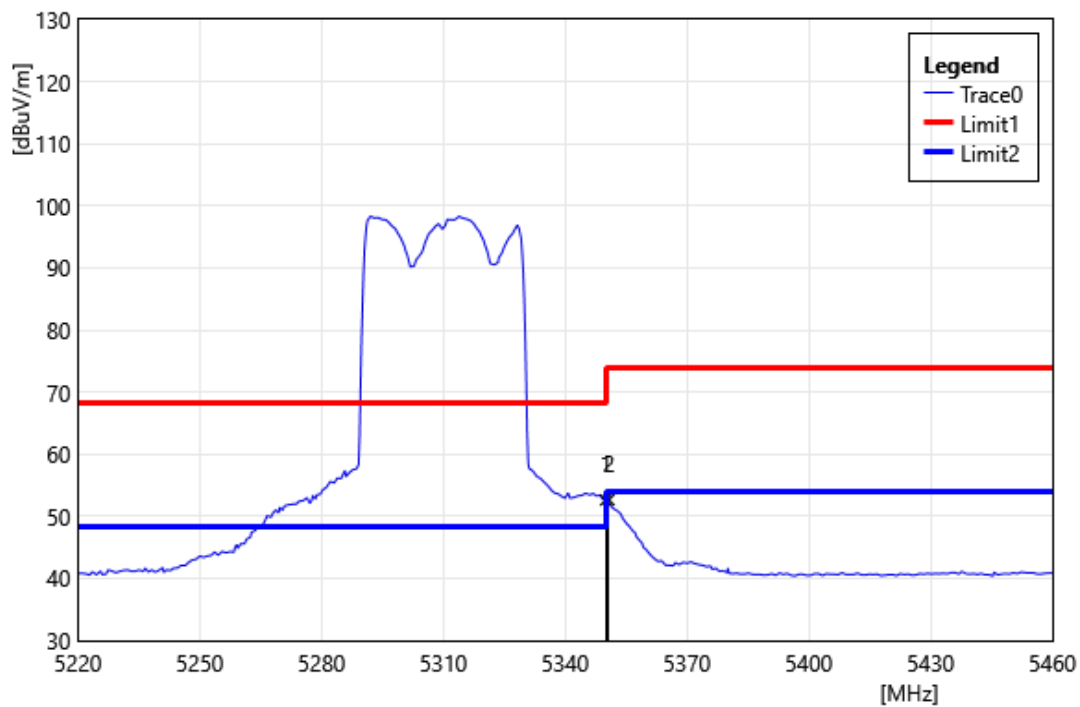


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.91	-1.27	52.63	54.00	-1.37	AVG
2	5350.80	53.92	-1.27	52.65	54.00	-1.35	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

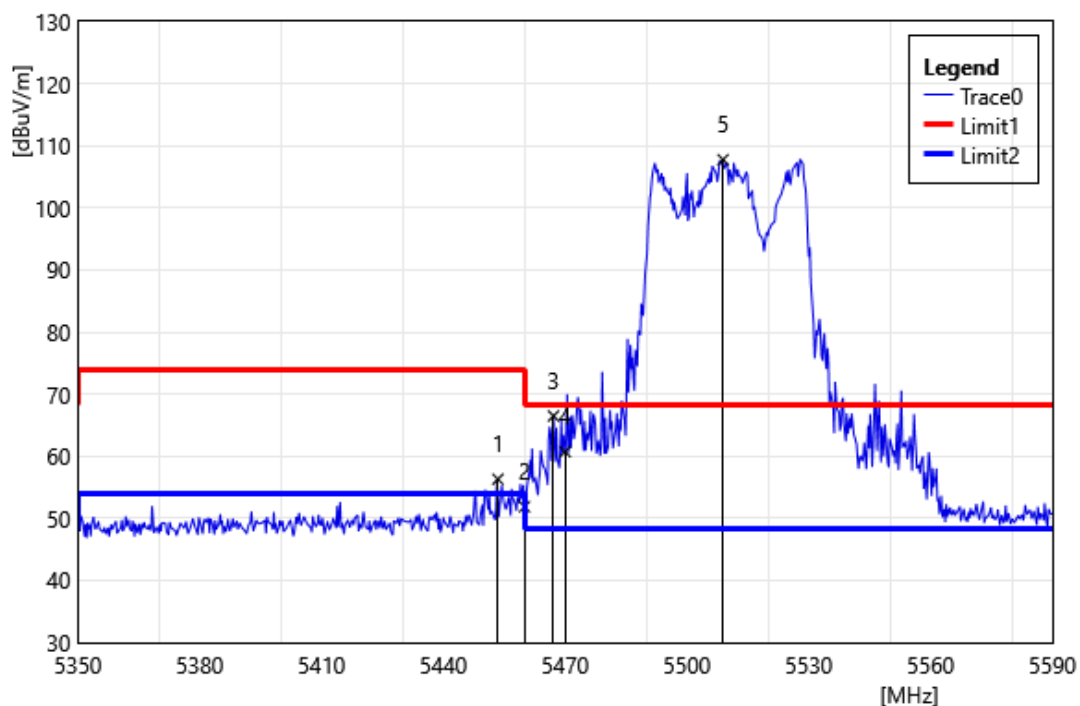


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.44	56.86	-0.56	56.31	74.00	-17.70	PEAK
2	5460.00	52.43	-0.55	51.88	74.00	-22.12	PEAK
3	5467.12	67.04	-0.55	66.49	68.20	-1.71	PEAK
4	5470.00	61.25	-0.54	60.71	68.20	-7.49	PEAK
5	5508.88	108.26	-0.50	107.77	68.20	39.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

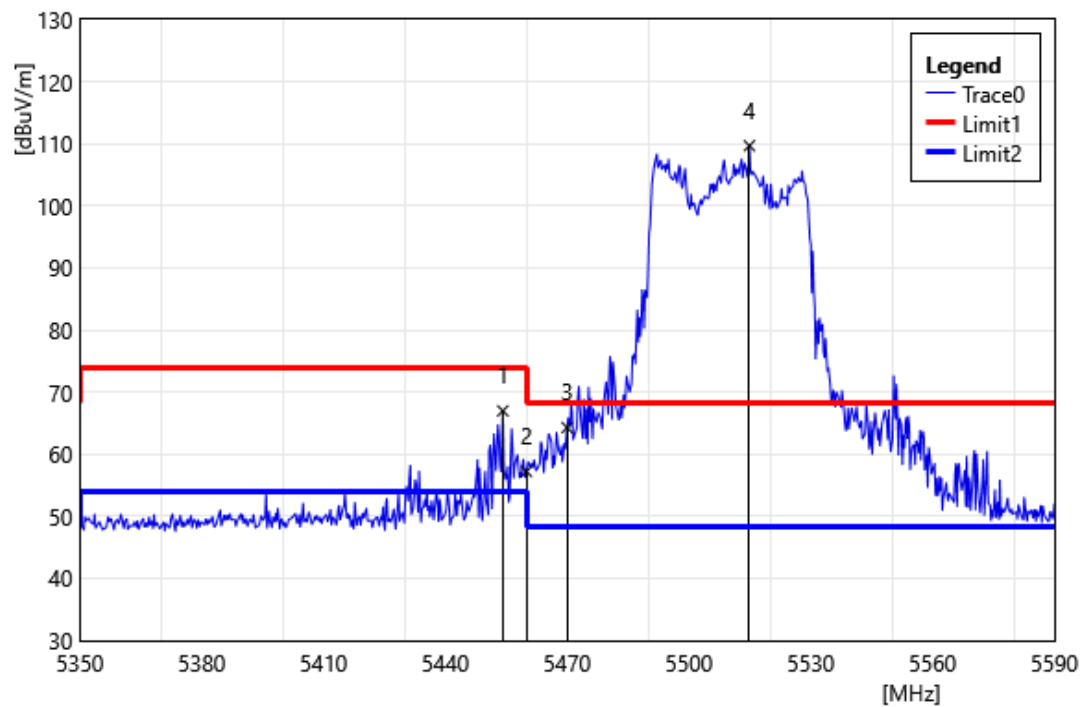


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.16	67.54	-0.56	66.98	74.00	-7.02	PEAK
2	5460.00	57.79	-0.55	57.24	74.00	-16.76	PEAK
3	5470.00	64.85	-0.54	64.31	68.20	-3.89	PEAK
4	5514.88	110.19	-0.50	109.69	68.20	41.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

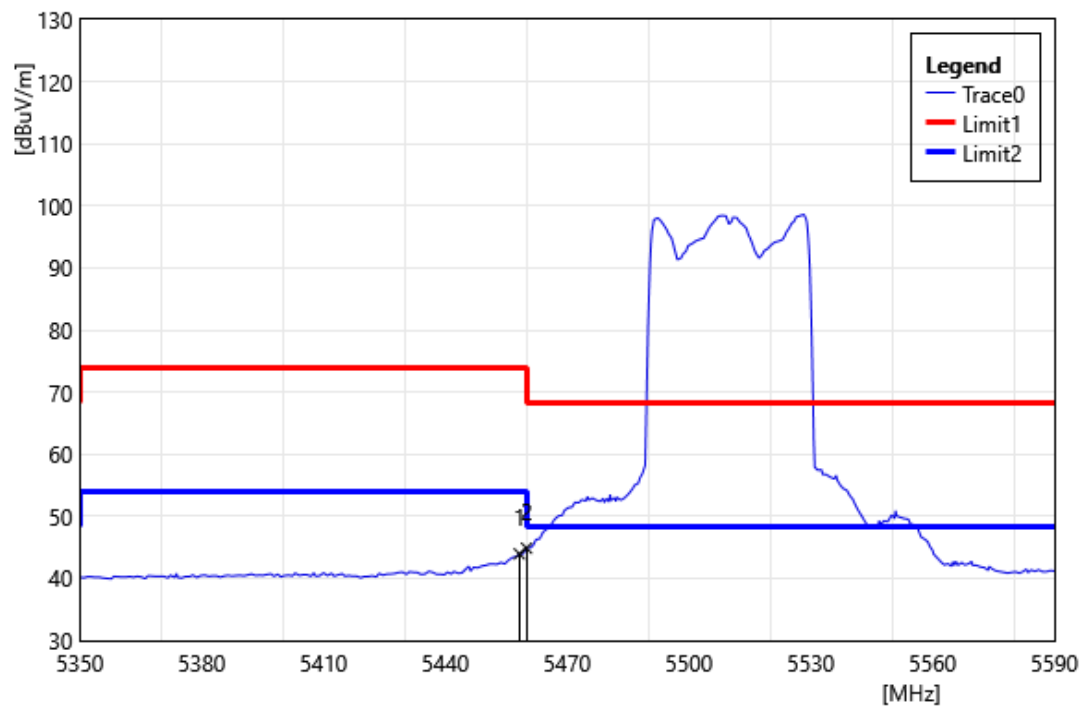


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	44.52	-0.56	43.96	54.00	-10.04	AVG
2	5460.00	45.42	-0.55	44.87	54.00	-9.13	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

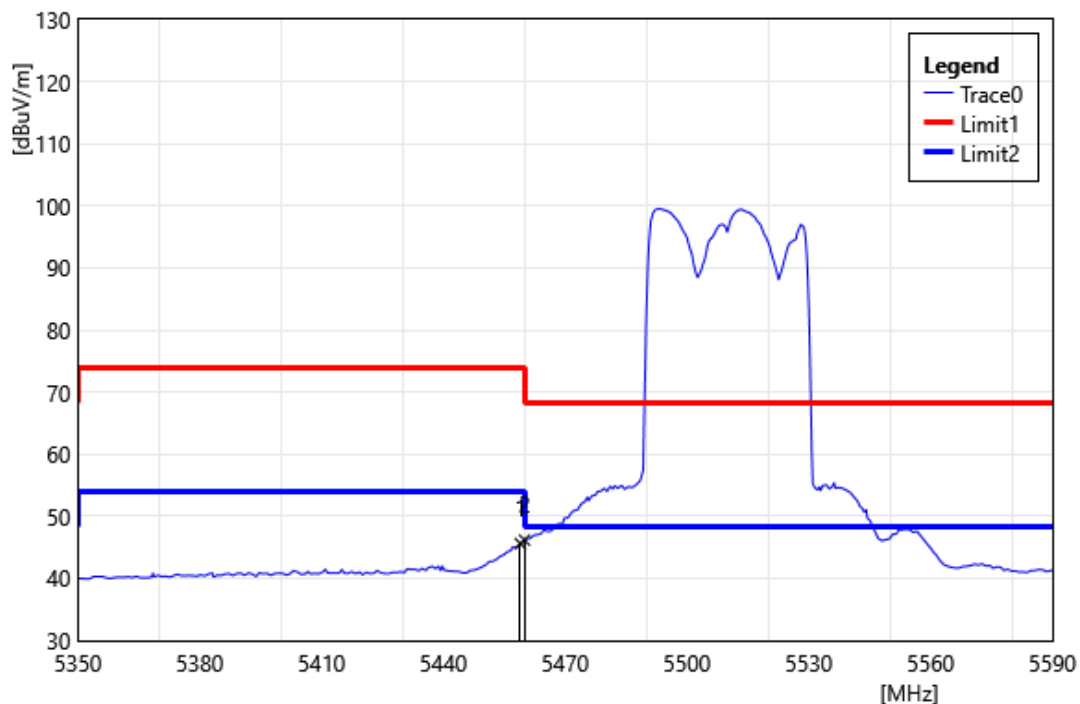


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	46.16	-0.55	45.61	54.00	-8.39	AVG
2	5460.00	46.74	-0.55	46.19	54.00	-7.81	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

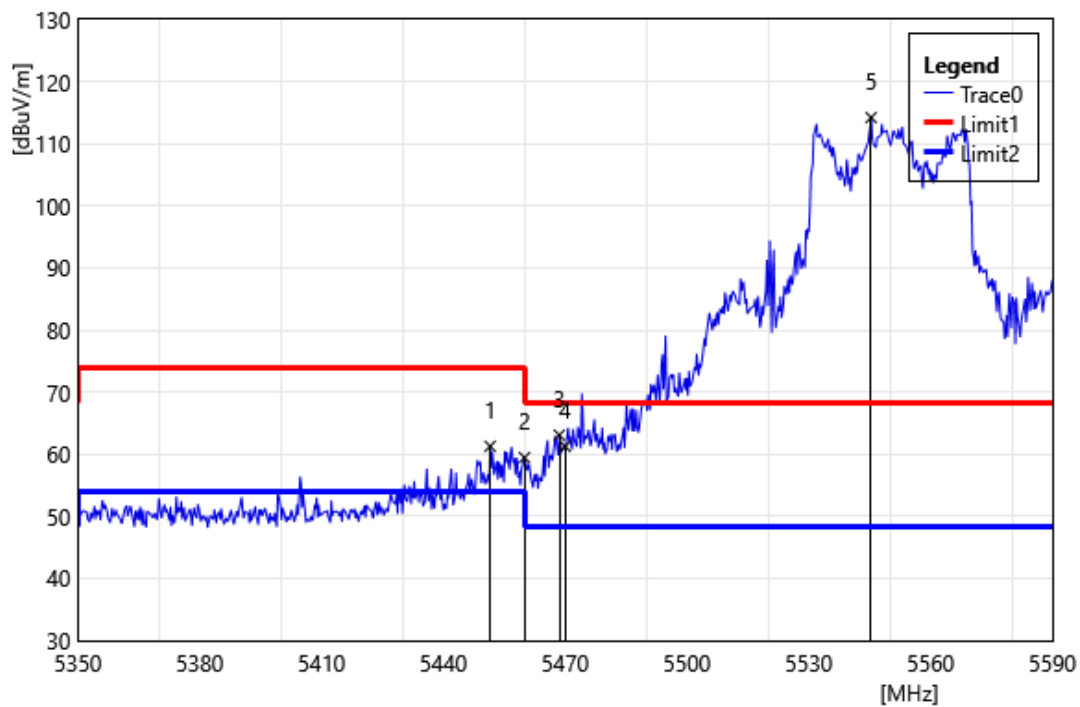


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.52	61.84	-0.56	61.28	74.00	-12.72	PEAK
2	5460.00	60.02	-0.55	59.47	74.00	-14.53	PEAK
3	5468.56	63.62	-0.54	63.08	68.20	-5.12	PEAK
4	5470.00	61.80	-0.54	61.26	68.20	-6.94	PEAK
5	5545.36	114.70	-0.48	114.22	68.20	46.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

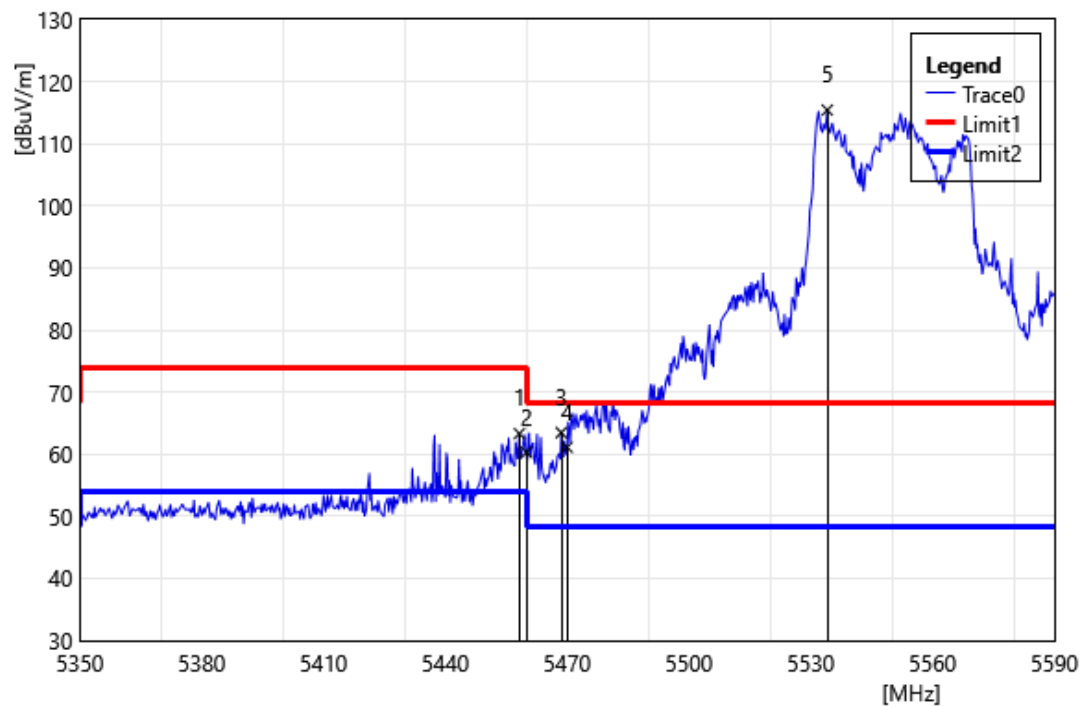


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	63.88	-0.56	63.32	74.00	-10.68	PEAK
2	5460.00	60.86	-0.55	60.31	74.00	-13.69	PEAK
3	5468.56	64.02	-0.54	63.48	68.20	-4.72	PEAK
4	5470.00	61.66	-0.54	61.12	68.20	-7.08	PEAK
5	5534.08	115.94	-0.49	115.45	68.20	47.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

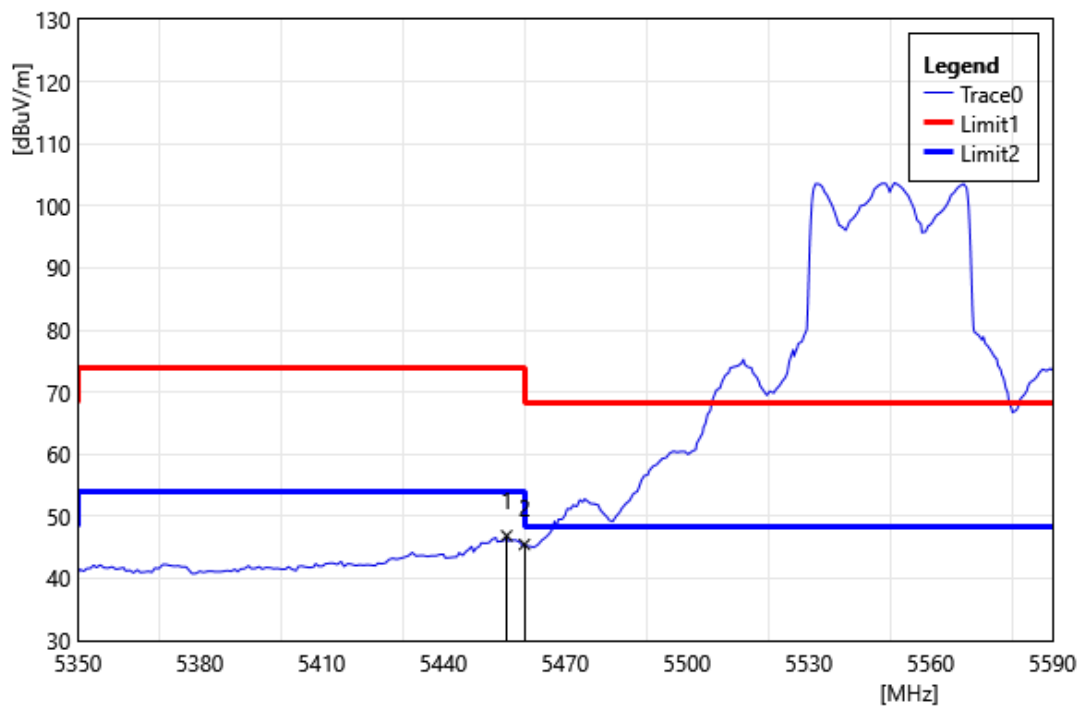


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.60	47.44	-0.56	46.88	54.00	-7.12	AVG
2	5460.00	46.02	-0.55	45.47	54.00	-8.53	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

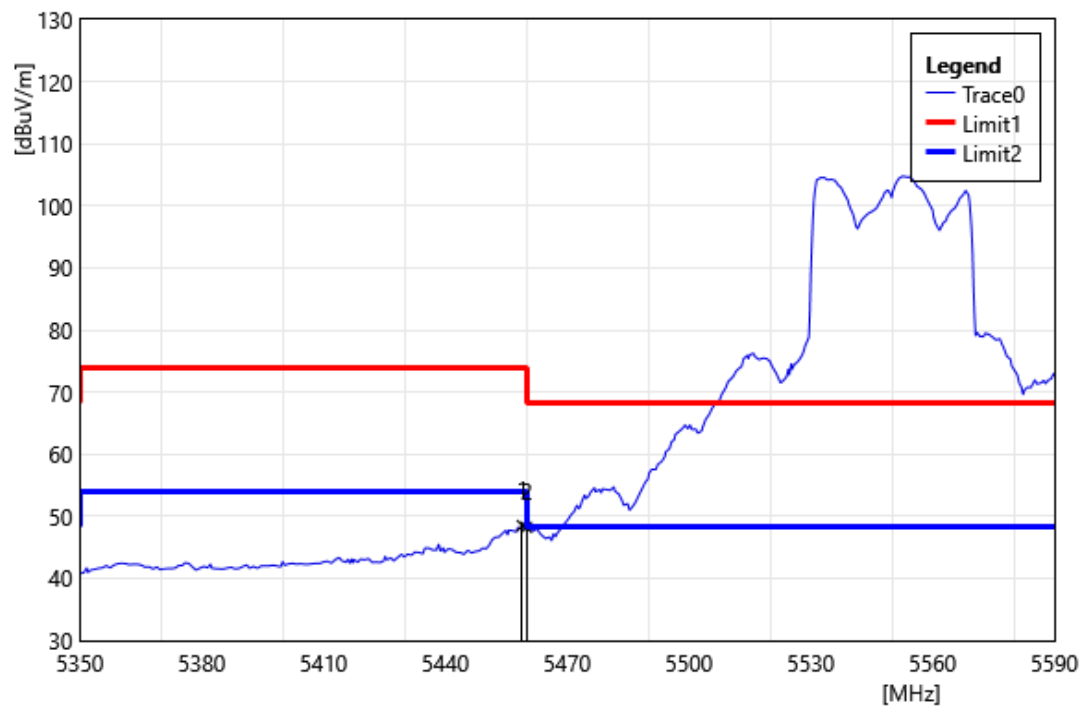


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	49.06	-0.55	48.51	54.00	-5.49	AVG
2	5460.00	48.78	-0.55	48.23	54.00	-5.77	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

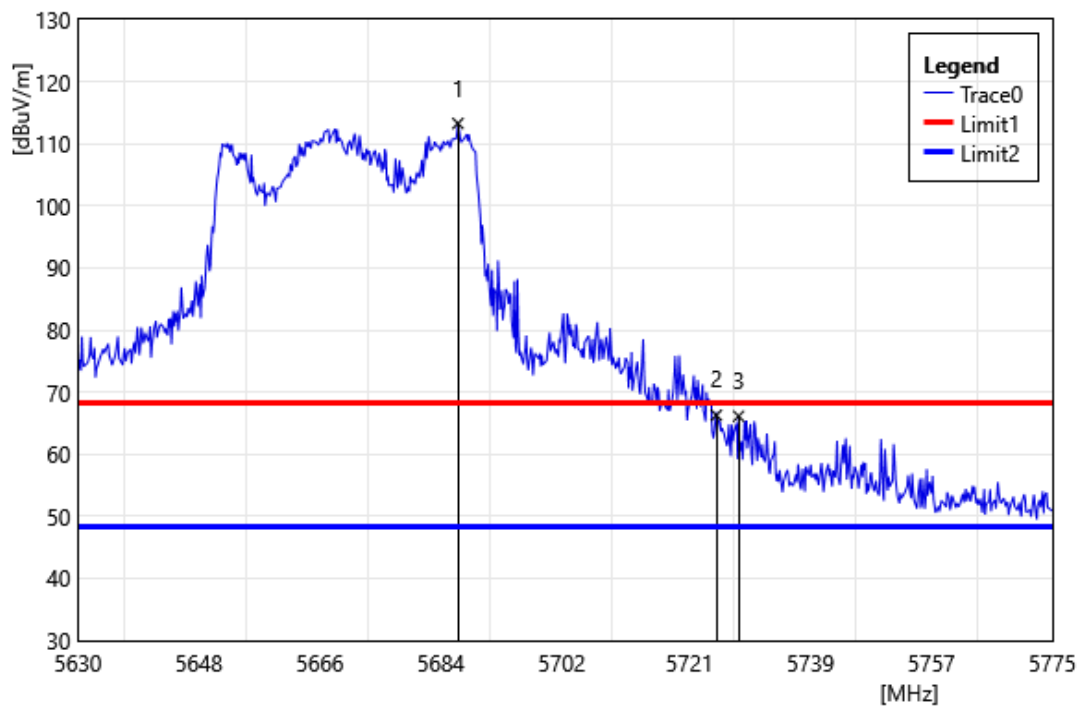


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5686.55	113.88	-0.60	113.28	68.20	45.08	PEAK
2	5725.00	66.61	-0.32	66.29	68.20	-1.91	PEAK
3	5728.31	66.42	-0.29	66.13	68.20	-2.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

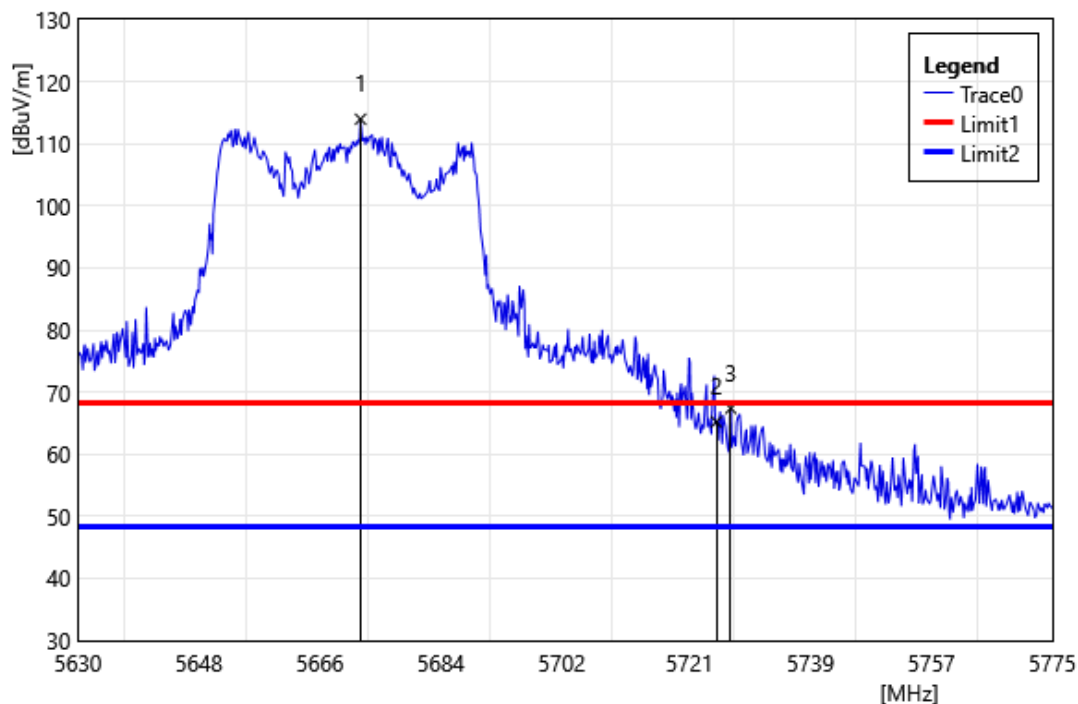


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5672.05	114.58	-0.61	113.97	68.20	45.77	PEAK
2	5725.00	65.55	-0.32	65.23	68.20	-2.97	PEAK
3	5727.15	67.71	-0.30	67.41	68.20	-0.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

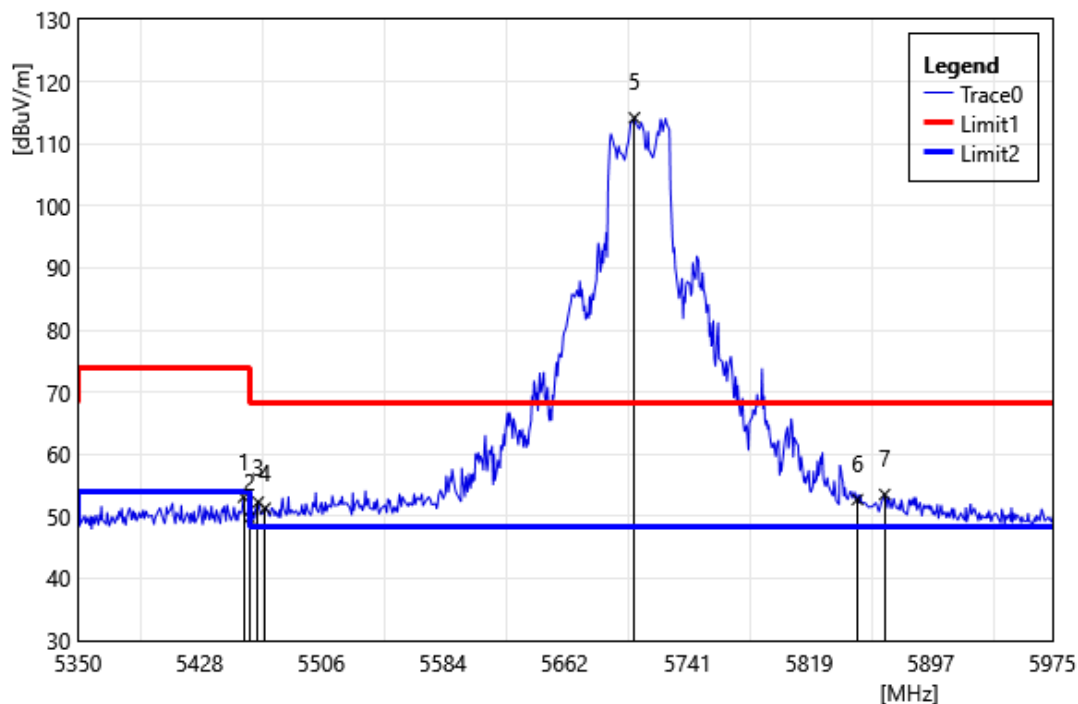


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.25	53.65	-0.56	53.09	74.00	-20.91	PEAK
2	5460.00	50.33	-0.55	49.78	74.00	-24.22	PEAK
3	5465.63	52.82	-0.55	52.27	68.20	-15.93	PEAK
4	5470.00	51.84	-0.54	51.30	68.20	-16.90	PEAK
5	5706.88	114.70	-0.52	114.18	68.20	45.98	PEAK
6	5850.00	52.40	0.30	52.70	68.20	-15.50	PEAK
7	5867.50	53.17	0.35	53.52	68.20	-14.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

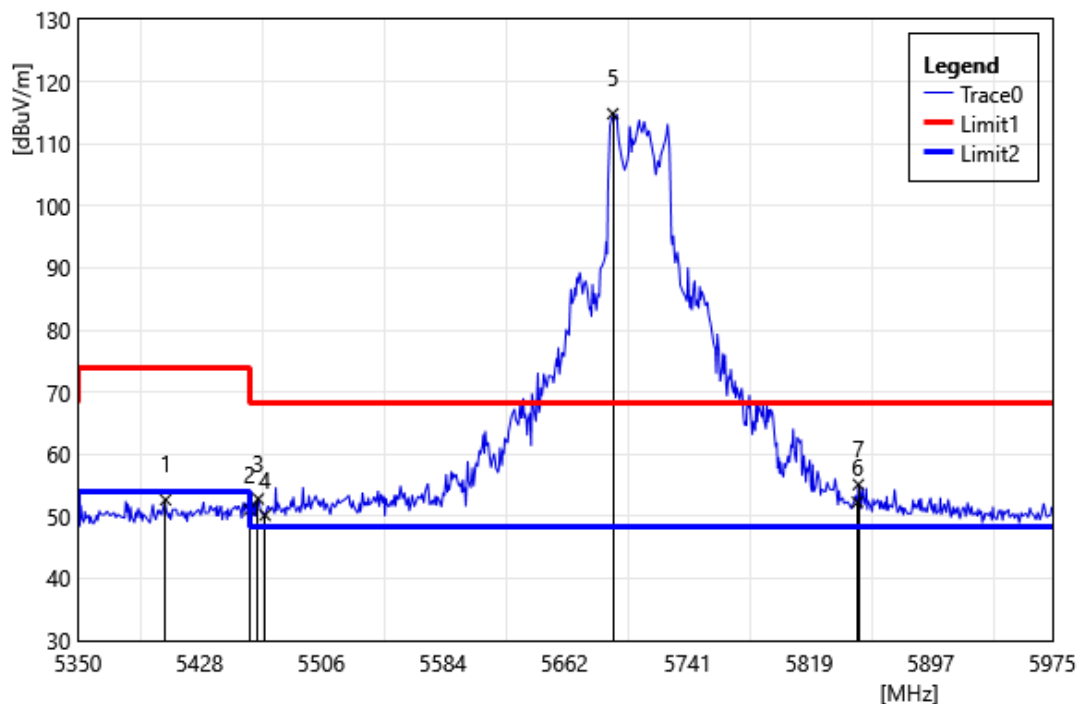


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5406.25	53.54	-0.87	52.67	74.00	-21.33	PEAK
2	5460.00	51.60	-0.55	51.05	74.00	-22.95	PEAK
3	5465.63	53.35	-0.55	52.80	68.20	-15.40	PEAK
4	5470.00	50.73	-0.54	50.19	68.20	-18.01	PEAK
5	5693.13	115.43	-0.59	114.84	68.20	46.64	PEAK
6	5850.00	51.98	0.30	52.28	68.20	-15.92	PEAK
7	5850.63	54.82	0.30	55.12	68.20	-13.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

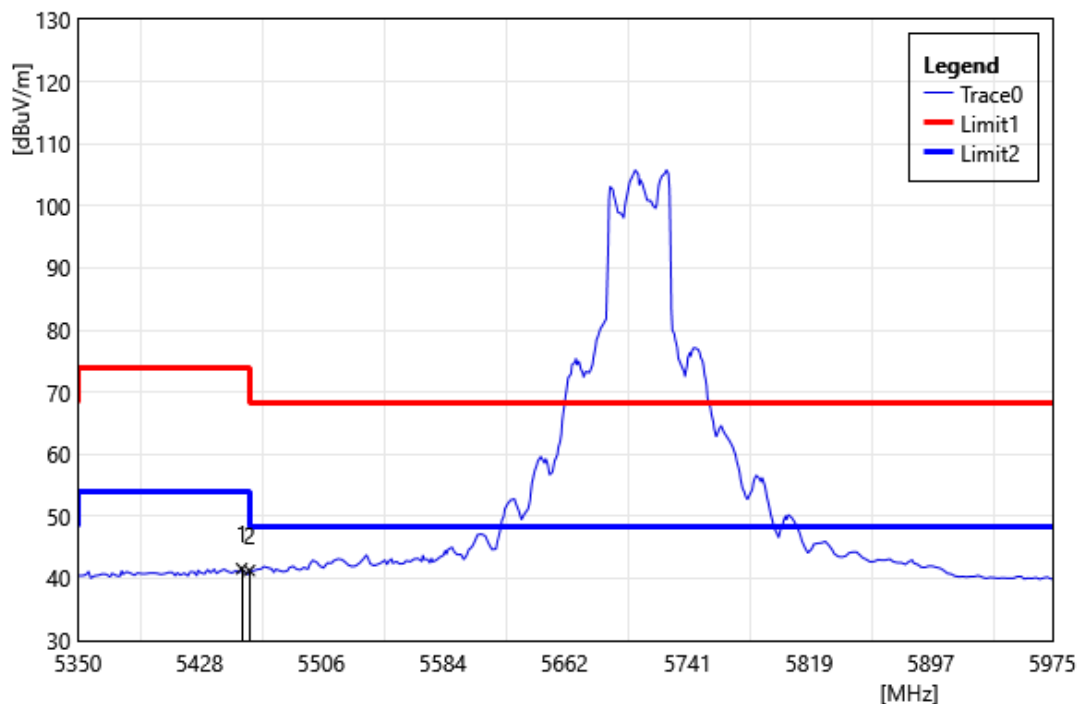


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.00	42.13	-0.56	41.57	54.00	-12.43	AVG
2	5460.00	41.82	-0.55	41.27	54.00	-12.73	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

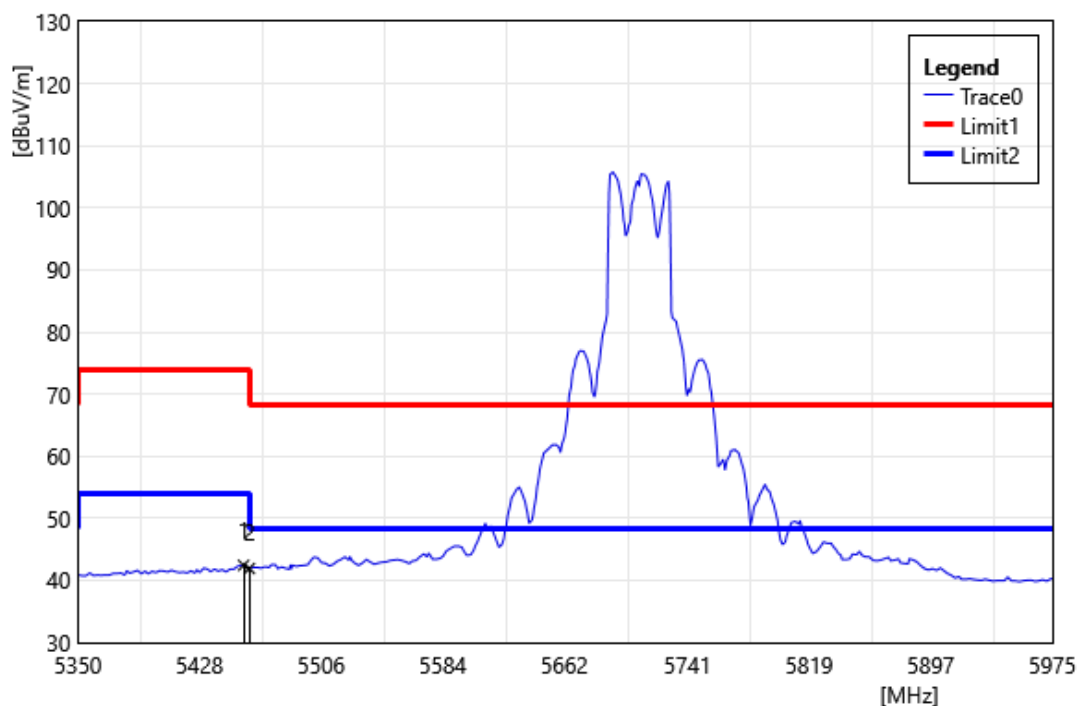


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.25	43.00	-0.56	42.44	54.00	-11.56	AVG
2	5460.00	42.48	-0.55	41.93	54.00	-12.07	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

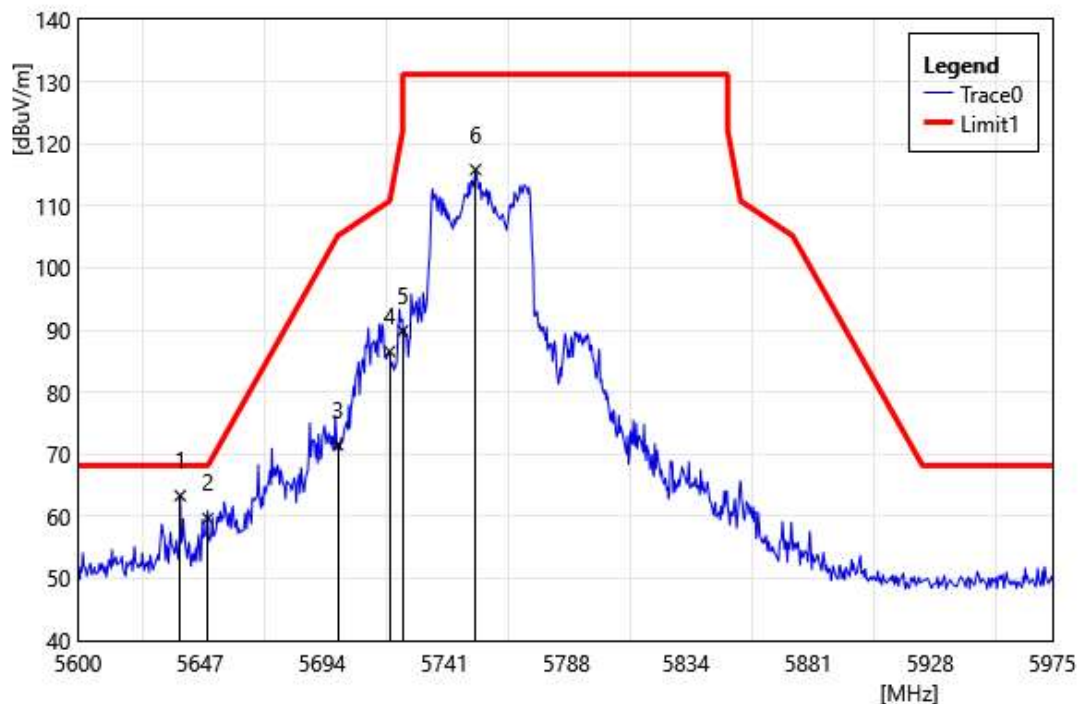


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5639.38	63.93	-0.61	63.32	68.20	-4.88	PEAK
2	5650.00	60.29	-0.62	59.67	68.20	-8.53	PEAK
3	5700.00	72.06	-0.59	71.47	105.20	-33.73	PEAK
4	5720.00	86.95	-0.38	86.57	110.80	-24.23	PEAK
5	5725.00	90.20	-0.32	89.88	122.20	-32.32	PEAK
6	5753.00	115.88	-0.05	115.83	131.20	-15.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

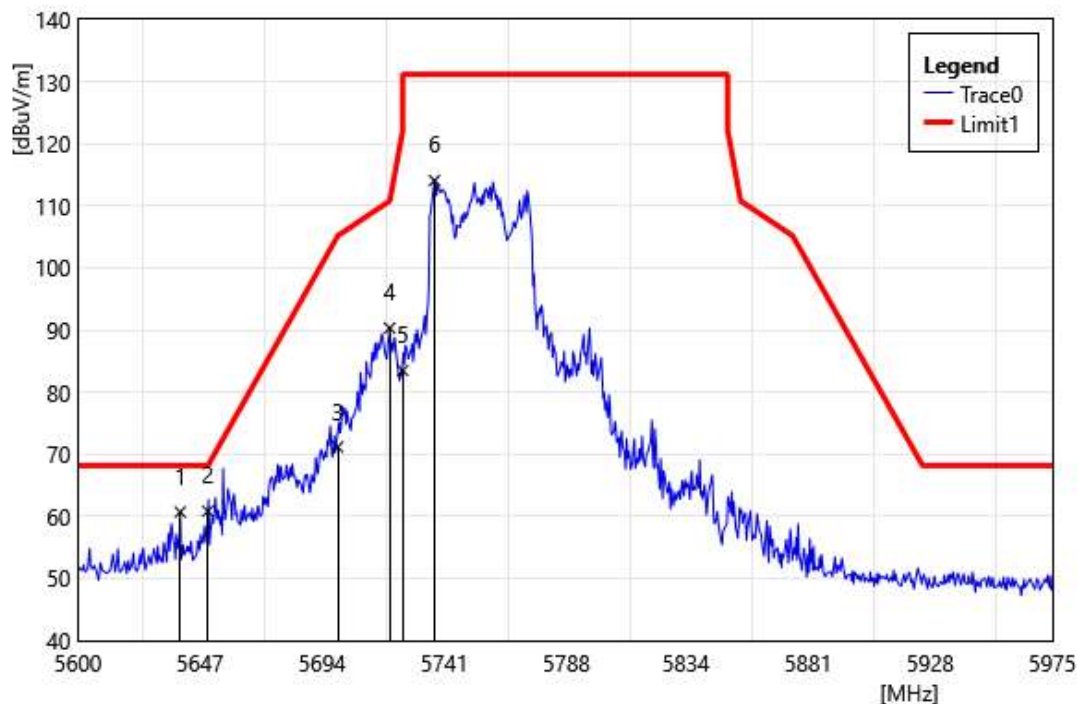


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5639.38	61.31	-0.61	60.70	68.20	-7.50	PEAK
2	5650.00	61.44	-0.62	60.82	68.20	-7.38	PEAK
3	5700.00	71.77	-0.59	71.18	105.20	-34.02	PEAK
4	5720.00	90.71	-0.38	90.33	110.80	-20.47	PEAK
5	5725.00	83.82	-0.32	83.50	122.20	-38.70	PEAK
6	5737.25	114.27	-0.20	114.07	131.20	-17.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

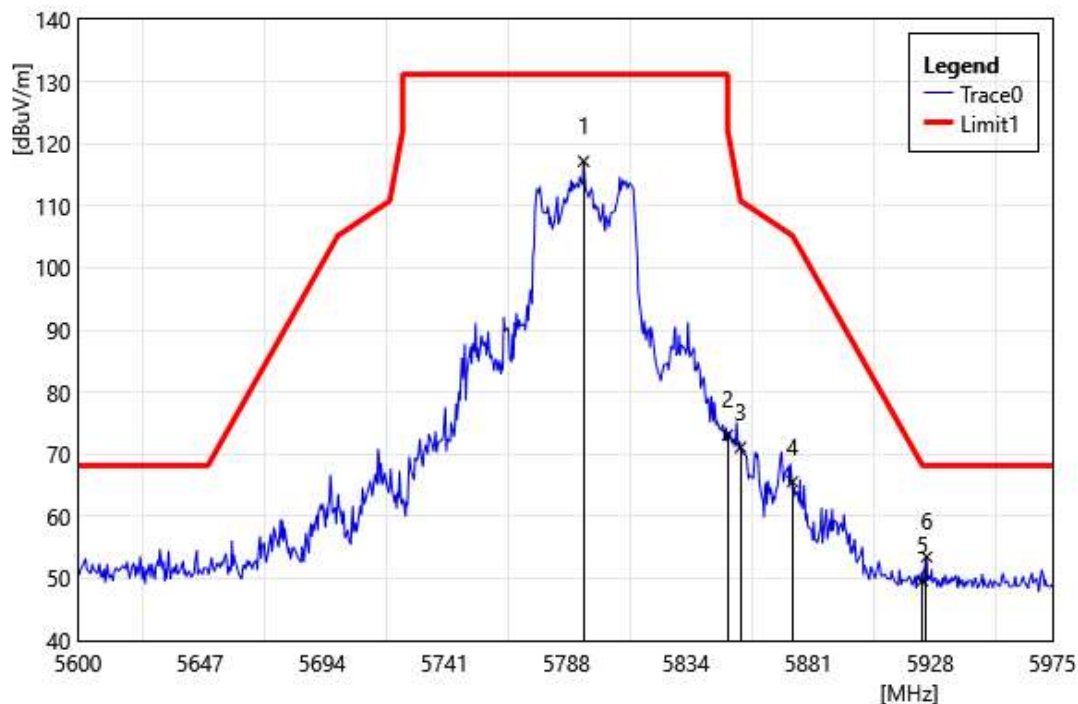


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5794.63	117.03	0.15	117.18	131.20	-14.02	PEAK
2	5850.00	72.80	0.30	73.10	122.20	-49.10	PEAK
3	5855.00	70.81	0.31	71.12	110.80	-39.68	PEAK
4	5875.00	65.20	0.36	65.56	105.20	-39.64	PEAK
5	5925.00	49.35	0.30	49.65	68.20	-18.55	PEAK
6	5926.63	53.18	0.29	53.47	68.20	-14.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

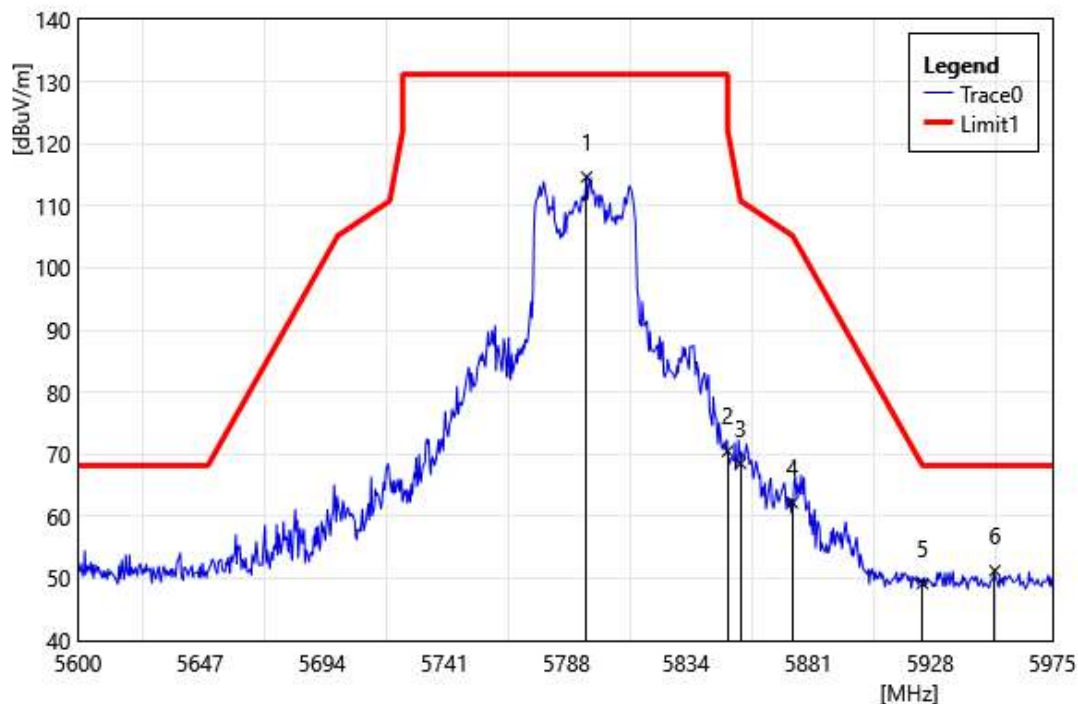


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5795.75	114.50	0.15	114.65	131.20	-16.55	PEAK
2	5850.00	70.19	0.30	70.49	122.20	-51.71	PEAK
3	5855.00	68.21	0.31	68.52	110.80	-42.28	PEAK
4	5875.00	61.85	0.36	62.21	105.20	-42.99	PEAK
5	5925.00	48.89	0.30	49.19	68.20	-19.01	PEAK
6	5952.88	51.08	0.17	51.25	68.20	-16.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

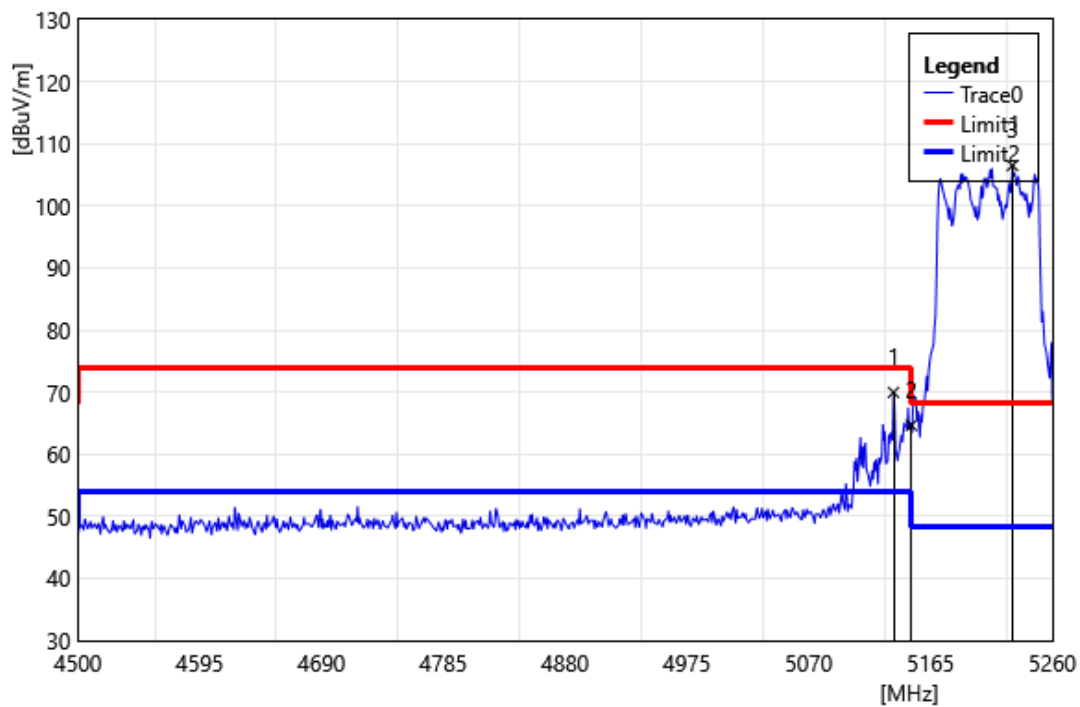


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.12	70.67	-0.71	69.96	74.00	-4.04	PEAK
2	5150.00	65.39	-0.72	64.66	74.00	-9.34	PEAK
3	5228.84	107.68	-1.17	106.51	68.20	38.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

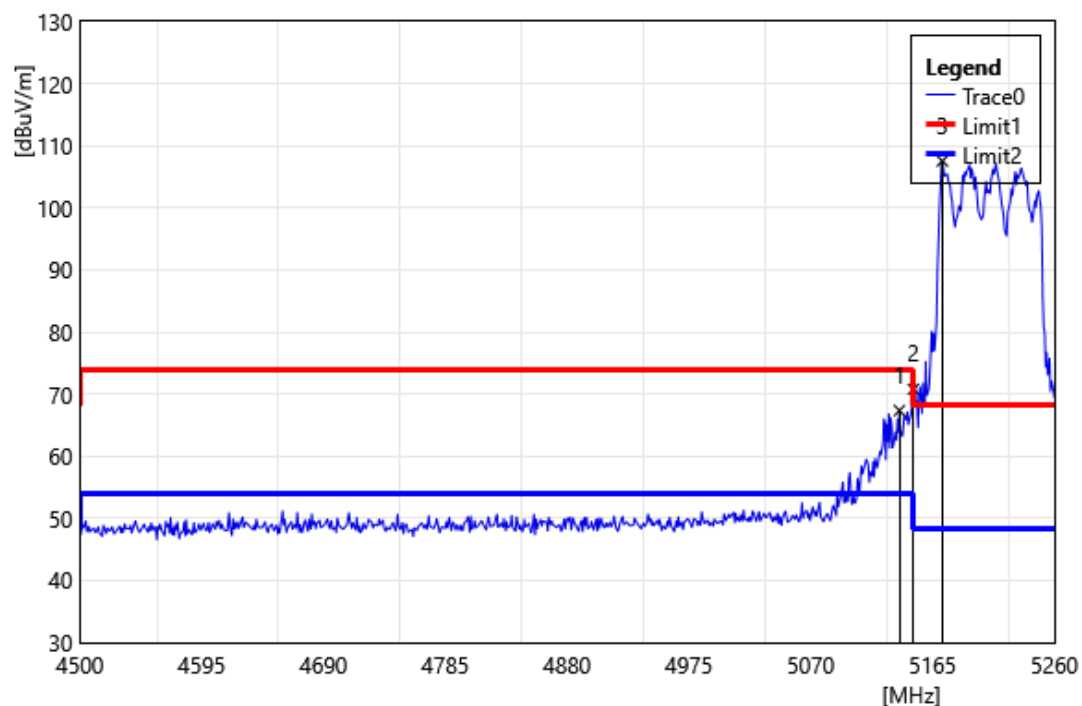


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.16	68.10	-0.72	67.38	74.00	-6.62	PEAK
2	5150.00	71.52	-0.72	70.79	74.00	-3.21	PEAK
3	5172.60	108.39	-0.84	107.55	68.20	39.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

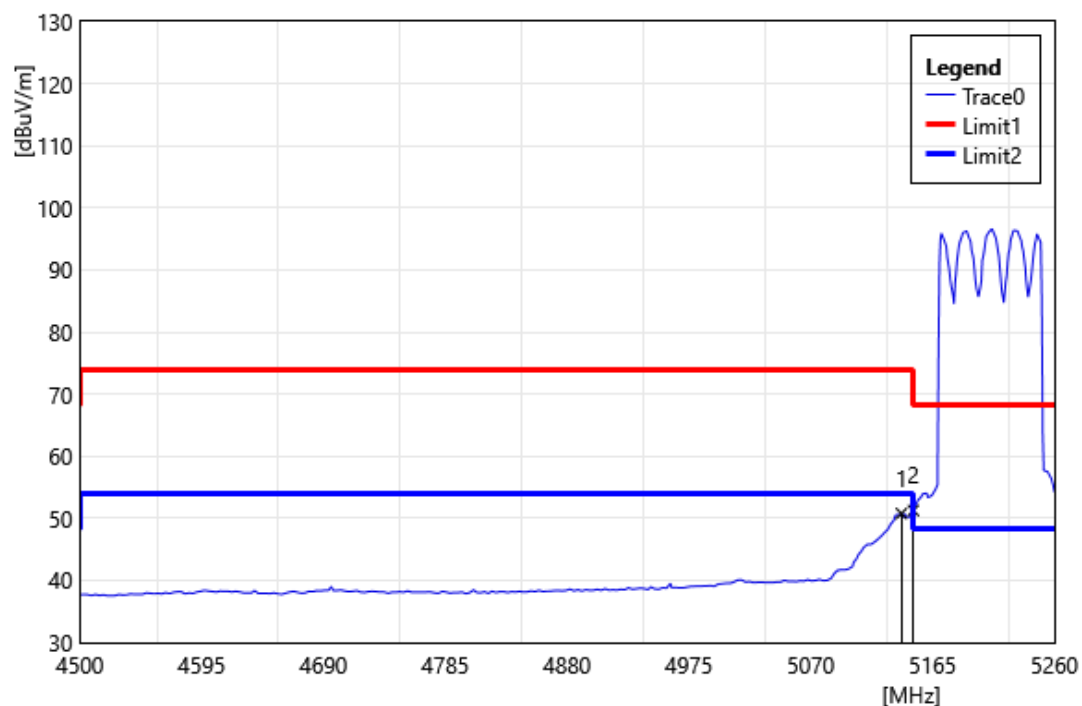


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.68	51.50	-0.72	50.78	54.00	-3.22	AVG
2	5150.00	51.99	-0.72	51.26	54.00	-2.74	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

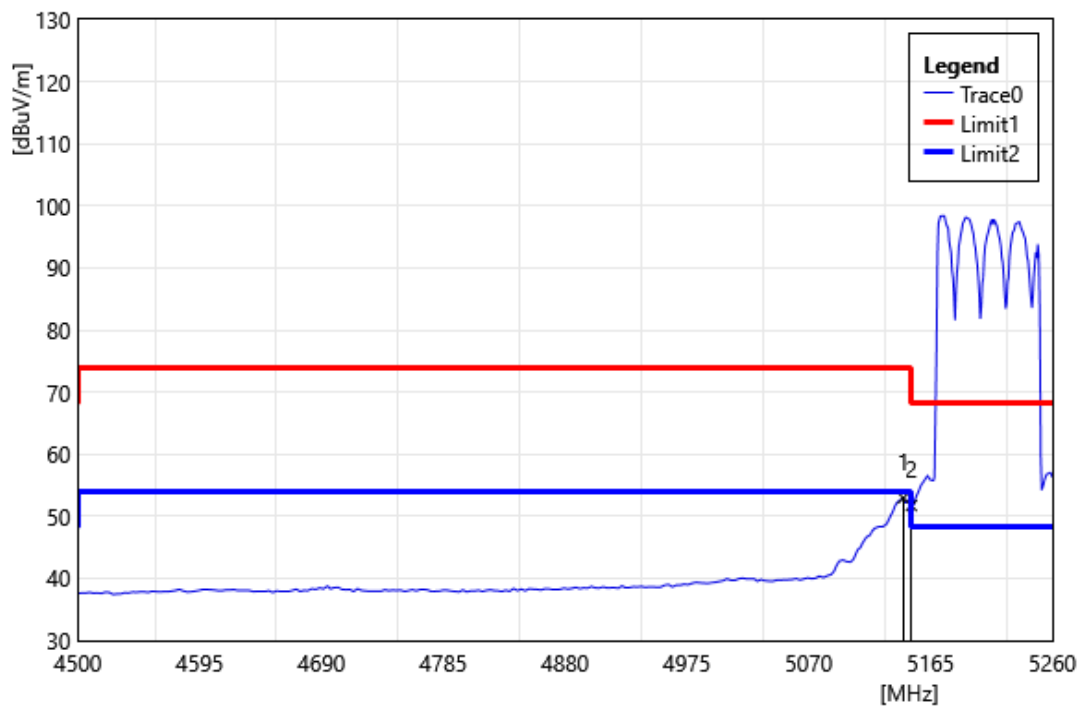


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	53.67	-0.72	52.95	54.00	-1.05	AVG
2	5150.00	52.46	-0.72	51.74	54.00	-2.26	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

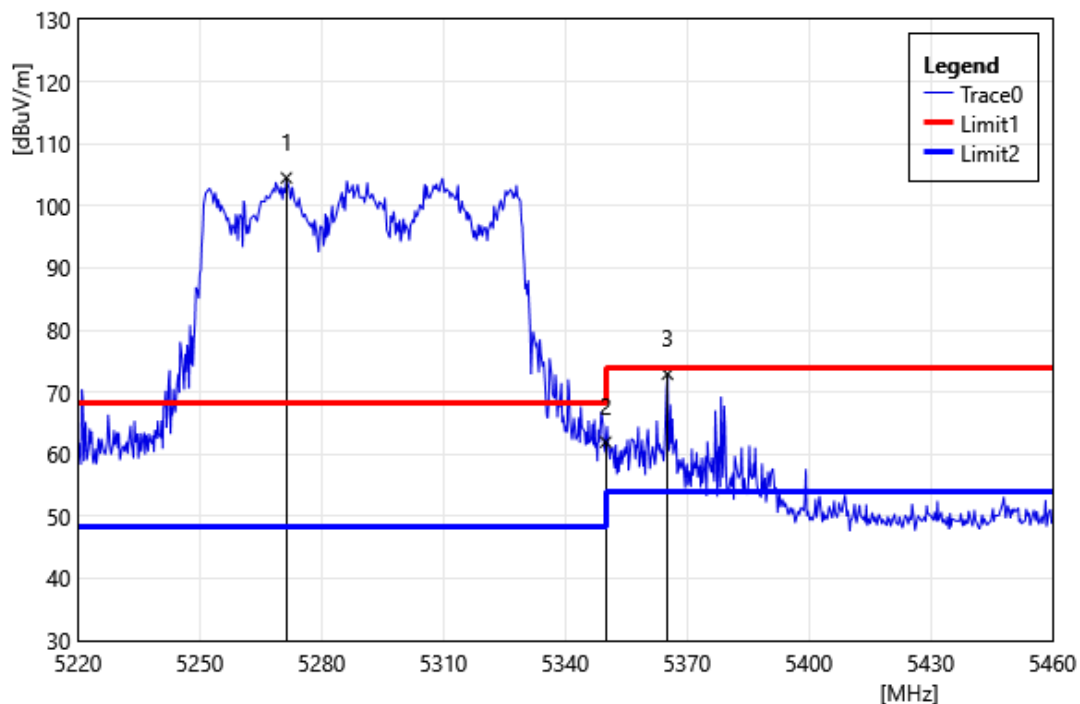


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5271.36	105.89	-1.38	104.51	68.20	36.31	PEAK
2	5350.00	63.07	-1.11	61.96	74.00	-12.04	PEAK
3	5365.20	73.90	-1.00	72.90	74.00	-1.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

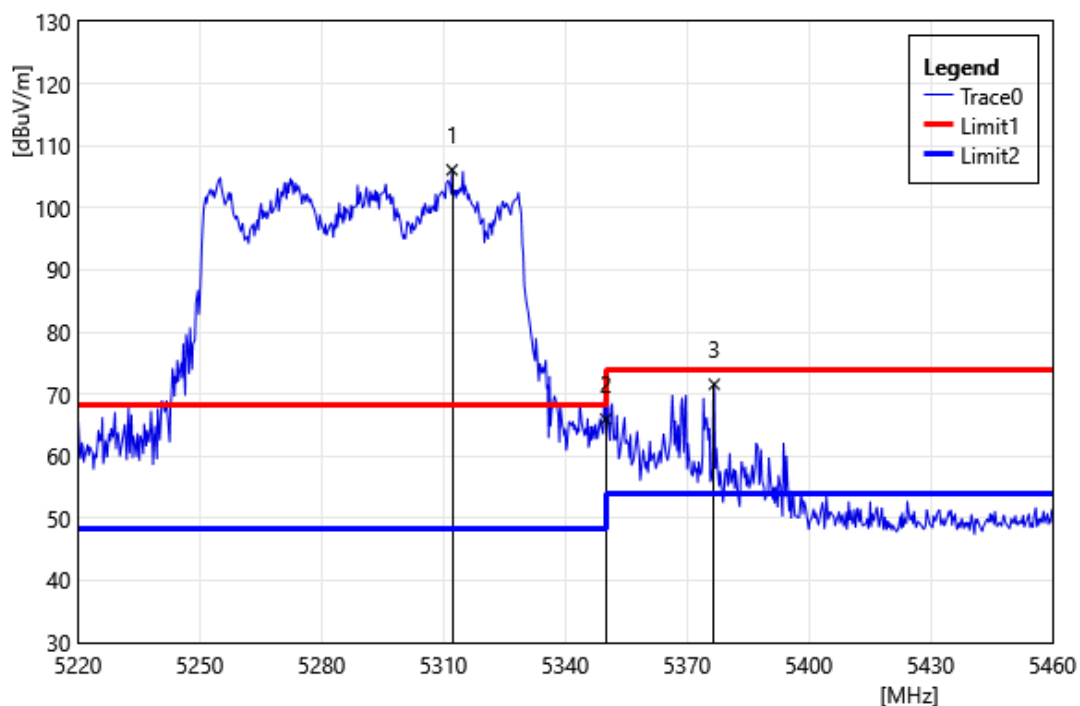


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5312.16	107.50	-1.38	106.12	68.20	37.92	PEAK
2	5350.00	67.08	-1.11	65.97	74.00	-8.03	PEAK
3	5376.72	72.51	-0.92	71.59	74.00	-2.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

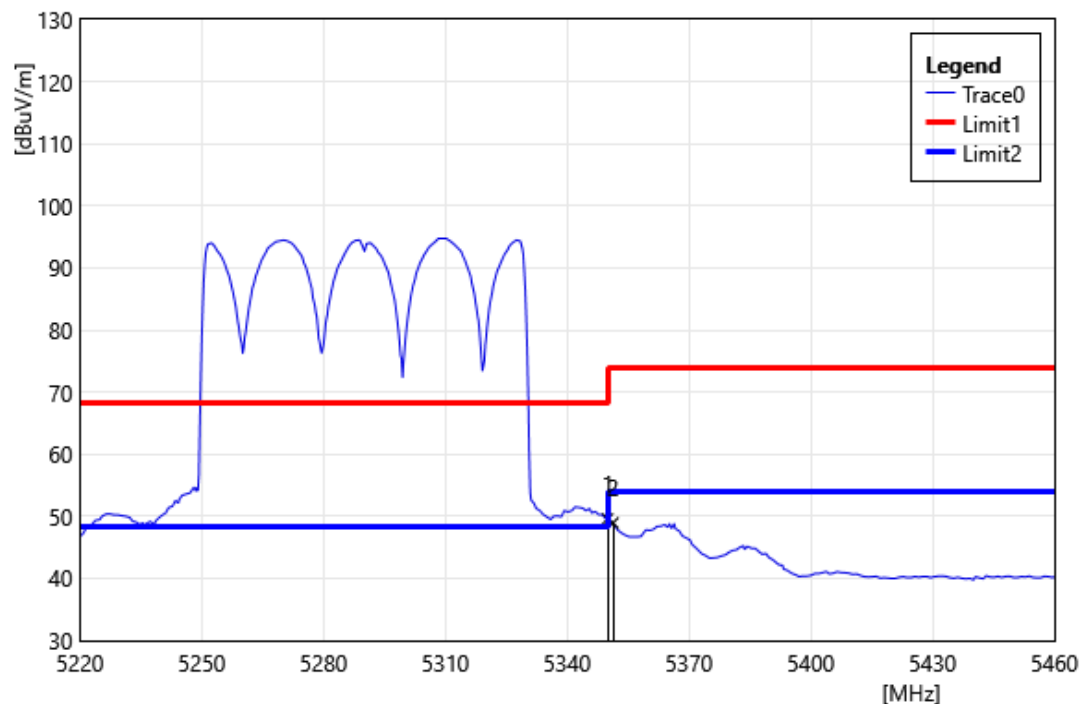


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	50.70	-1.11	49.59	54.00	-4.41	AVG
2	5351.28	50.04	-1.10	48.94	54.00	-5.06	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

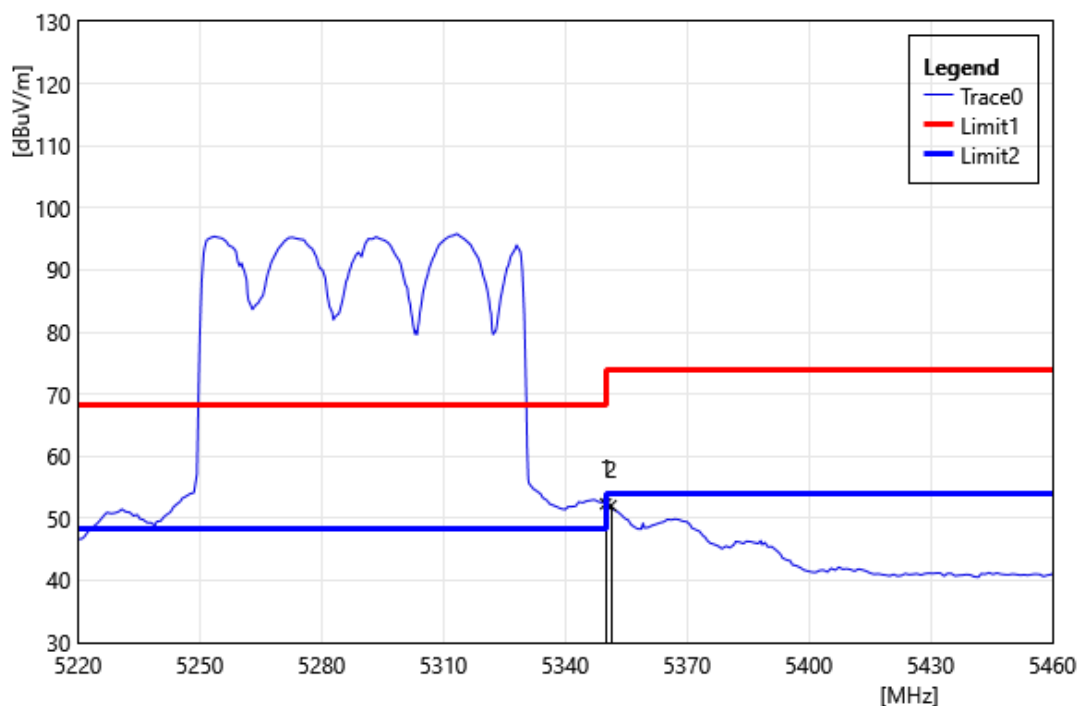


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.45	-1.11	52.34	54.00	-1.66	AVG
2	5351.28	53.15	-1.10	52.05	54.00	-1.95	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

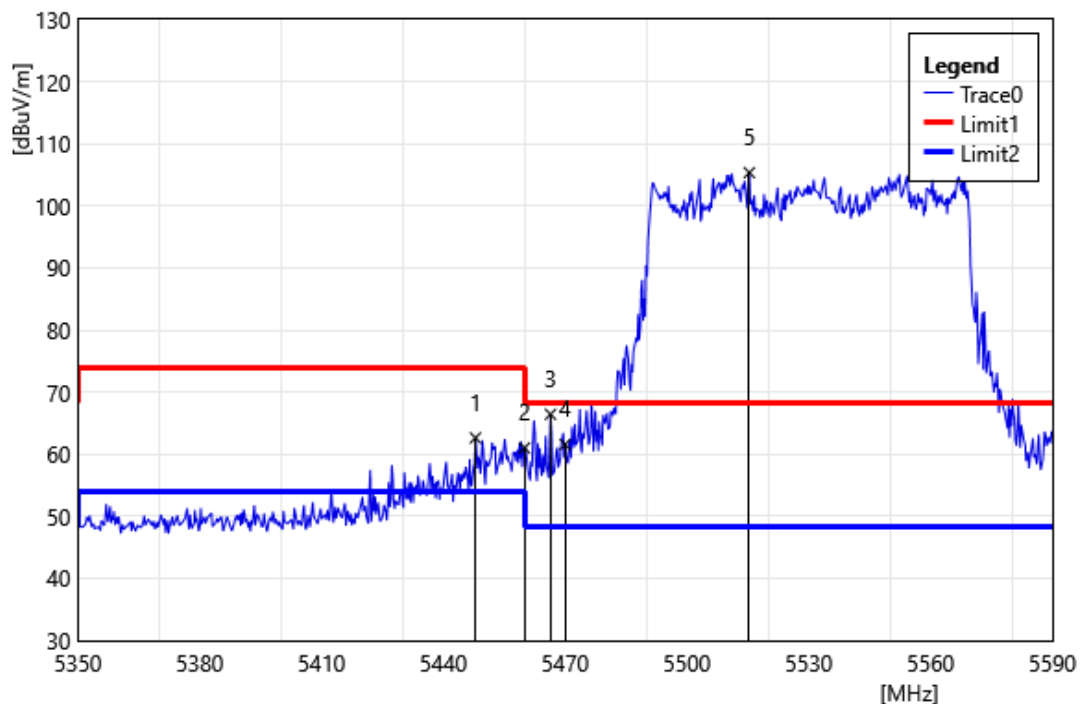


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.92	63.06	-0.42	62.64	74.00	-11.36	PEAK
2	5460.00	61.42	-0.39	61.04	74.00	-12.97	PEAK
3	5466.40	66.83	-0.39	66.44	68.20	-1.76	PEAK
4	5470.00	61.97	-0.38	61.59	68.20	-6.61	PEAK
5	5515.36	105.70	-0.33	105.37	68.20	37.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

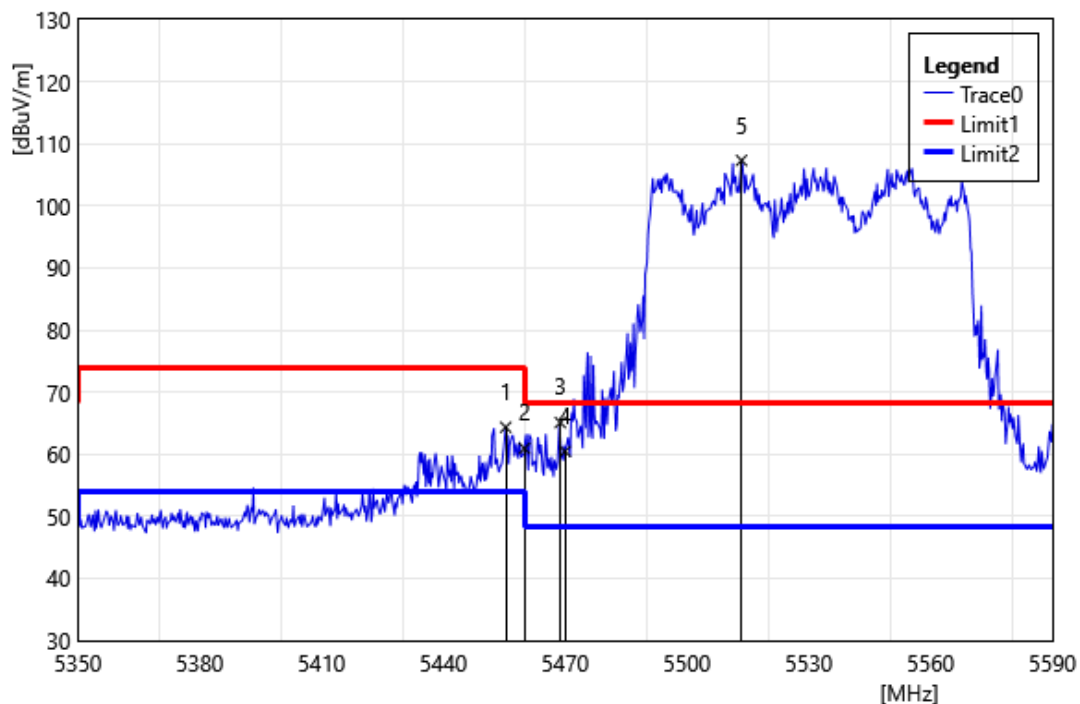


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.36	64.76	-0.40	64.36	74.00	-9.64	PEAK
2	5460.00	61.35	-0.39	60.96	74.00	-13.04	PEAK
3	5468.80	65.49	-0.38	65.11	68.20	-3.09	PEAK
4	5470.00	60.84	-0.38	60.46	68.20	-7.74	PEAK
5	5513.44	107.65	-0.33	107.32	68.20	39.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

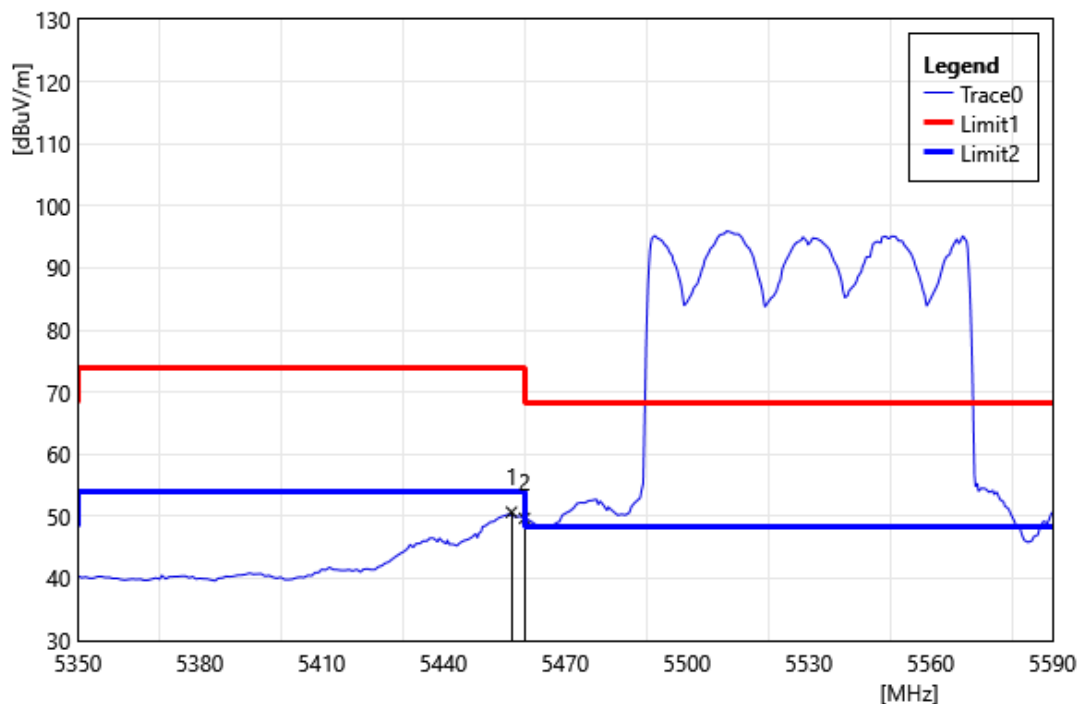


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.80	51.08	-0.40	50.68	54.00	-3.32	AVG
2	5460.00	50.08	-0.39	49.69	54.00	-4.31	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

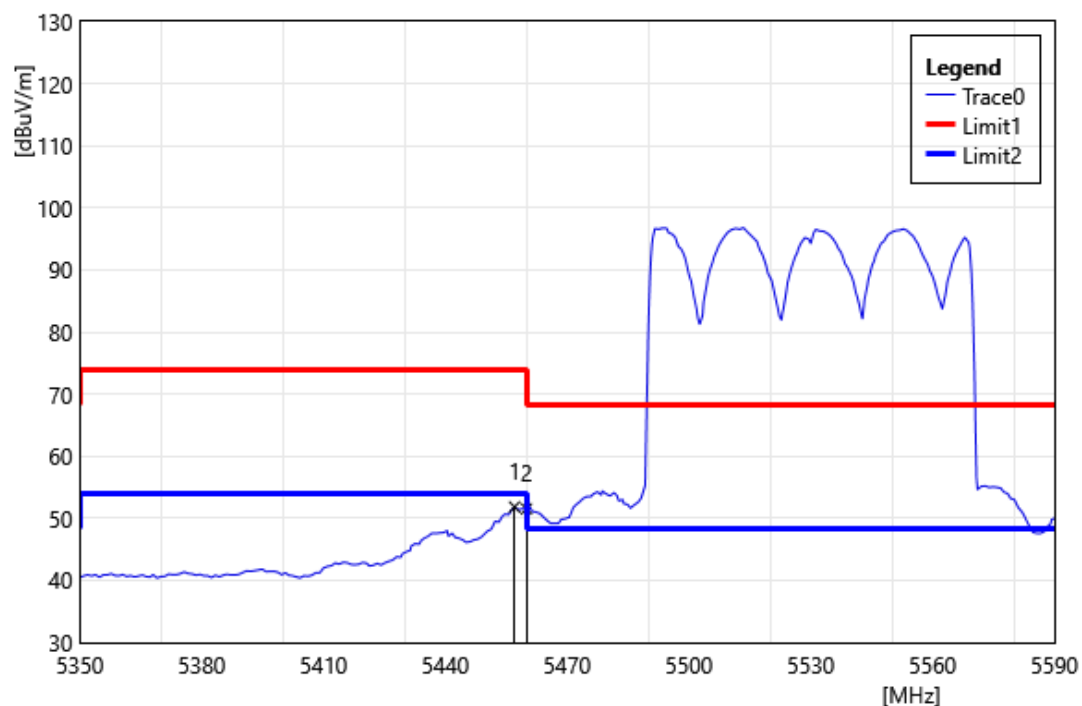


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.04	52.23	-0.40	51.83	54.00	-2.17	AVG
2	5460.00	51.92	-0.39	51.53	54.00	-2.47	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

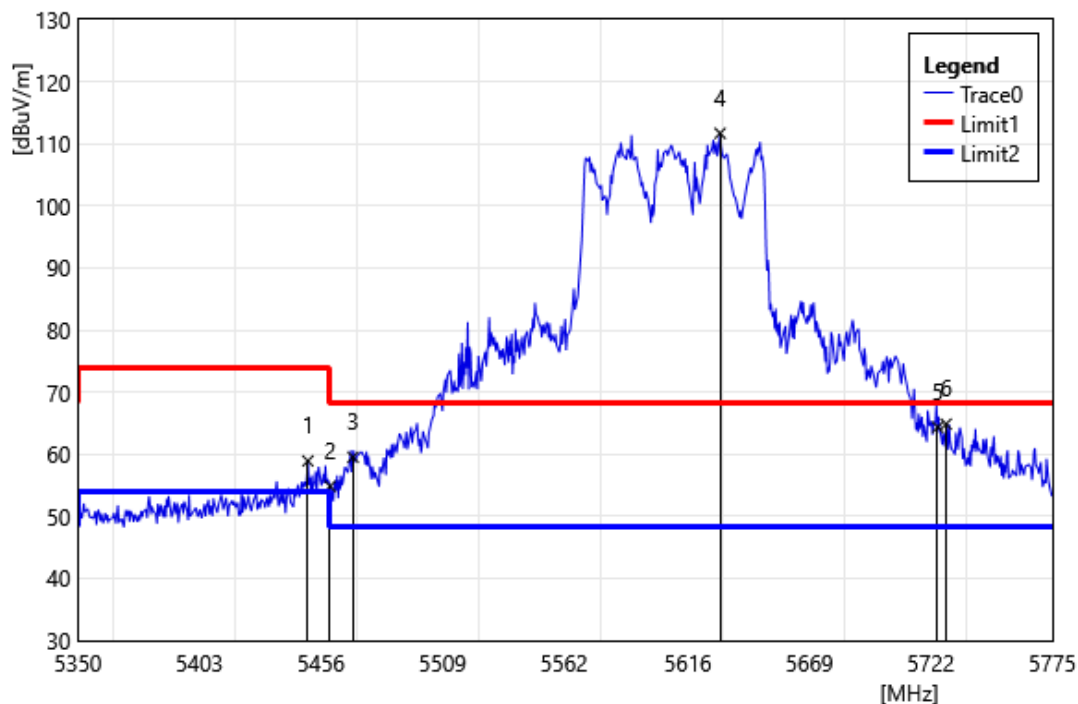


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.30	59.34	-0.40	58.94	74.00	-15.06	PEAK
2	5460.00	55.23	-0.39	54.84	74.00	-19.16	PEAK
3	5470.00	59.91	-0.38	59.53	68.20	-8.67	PEAK
4	5630.08	112.05	-0.36	111.69	68.20	43.49	PEAK
5	5725.00	64.42	-0.04	64.38	68.20	-3.82	PEAK
6	5728.68	64.86	0.00	64.86	68.20	-3.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

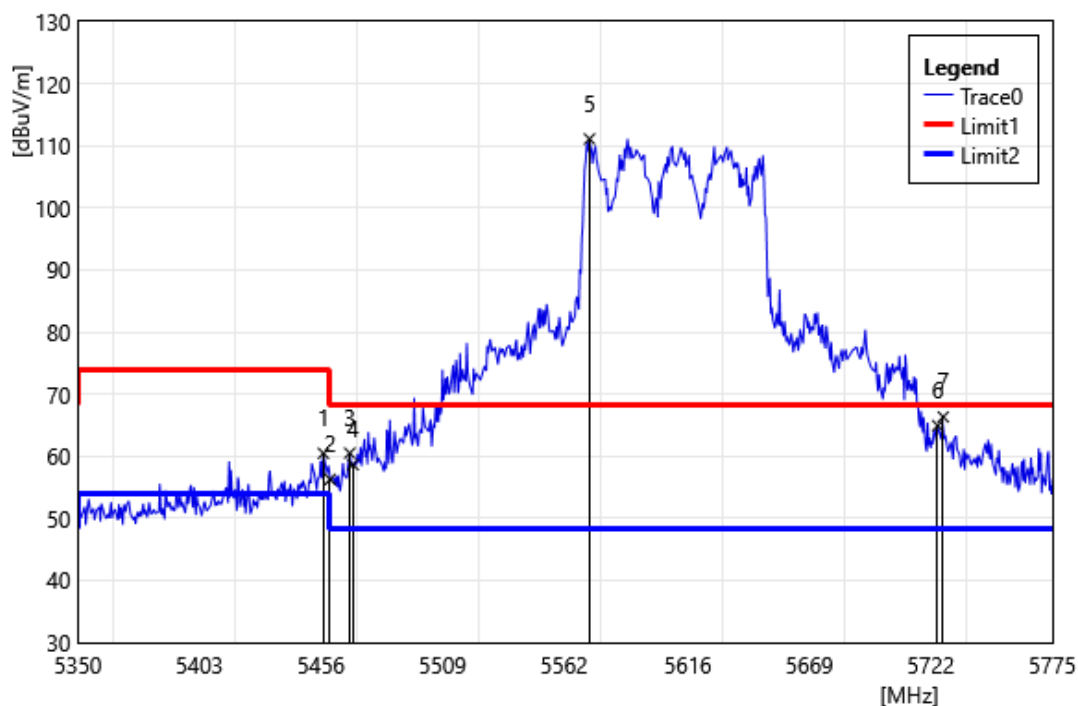


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.10	60.87	-0.40	60.47	74.00	-13.53	PEAK
2	5460.00	56.67	-0.39	56.28	74.00	-17.72	PEAK
3	5468.58	60.90	-0.38	60.52	68.20	-7.68	PEAK
4	5470.00	59.01	-0.38	58.63	68.20	-9.57	PEAK
5	5573.13	111.42	-0.31	111.11	68.20	42.91	PEAK
6	5725.00	64.97	-0.04	64.93	68.20	-3.27	PEAK
7	5727.40	66.35	-0.02	66.33	68.20	-1.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

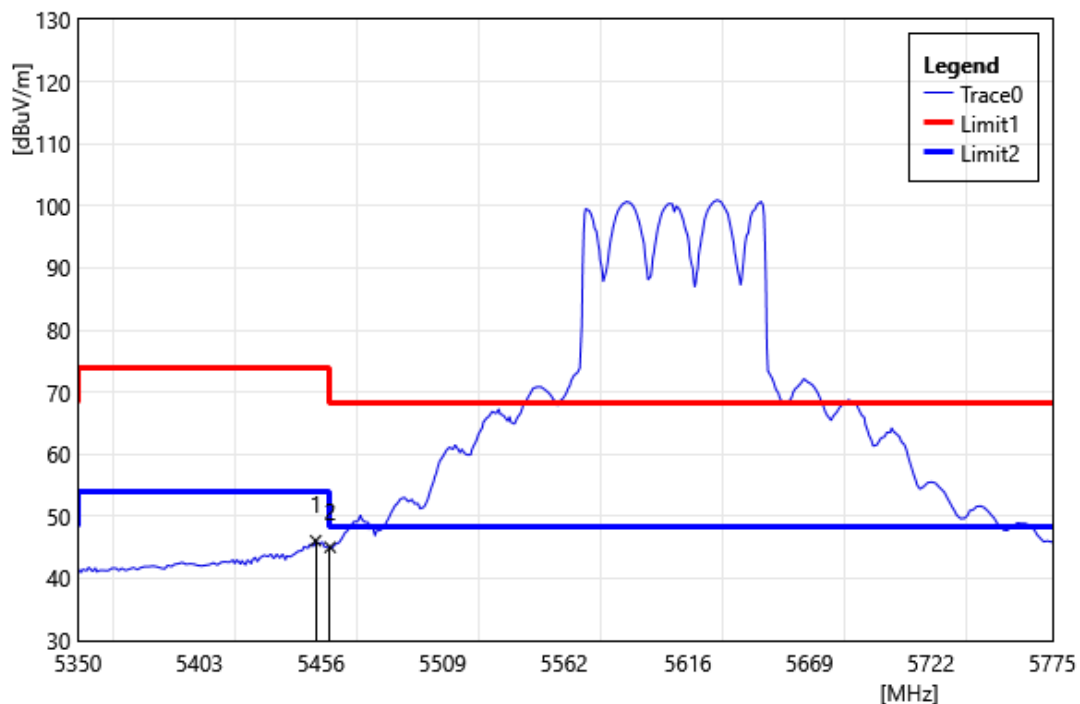


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.70	46.46	-0.40	46.06	54.00	-7.94	AVG
2	5460.00	45.42	-0.39	45.03	54.00	-8.97	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

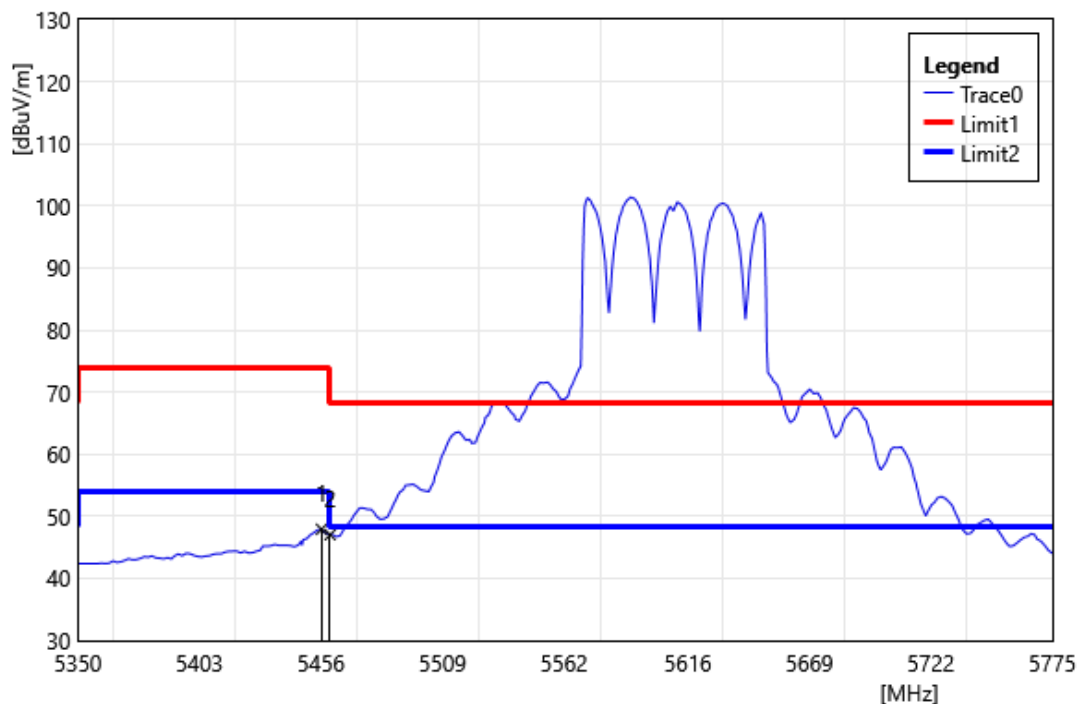


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.25	48.32	-0.40	47.92	54.00	-6.08	AVG
2	5460.00	47.43	-0.39	47.04	54.00	-6.96	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

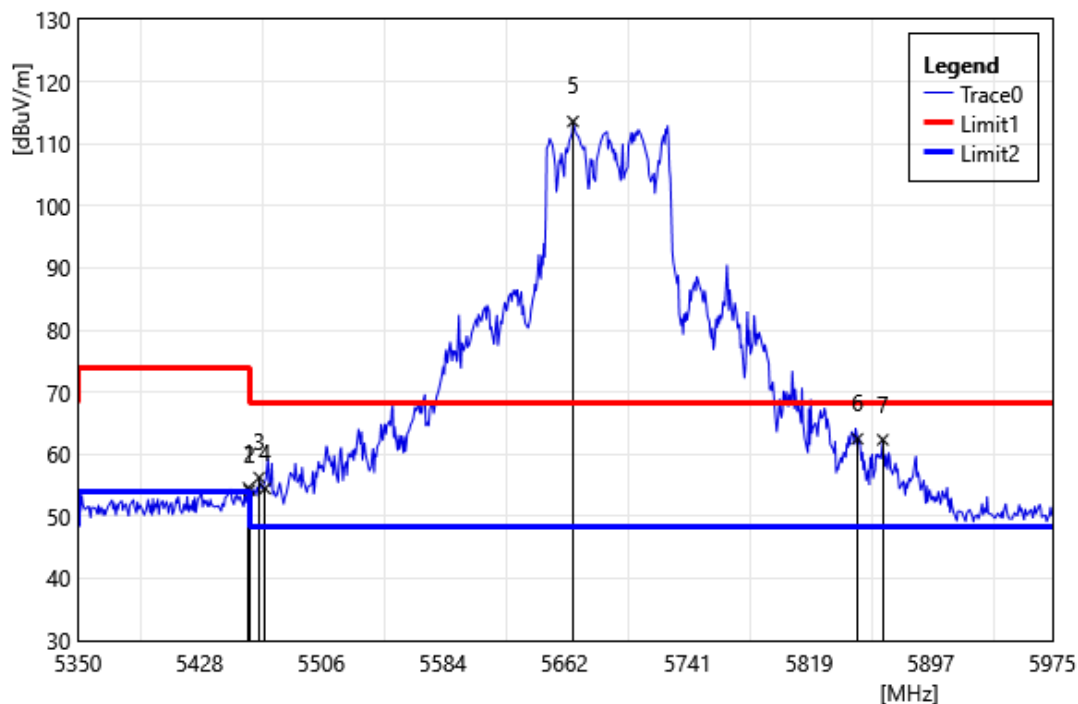


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.38	54.99	-0.39	54.60	74.00	-19.40	PEAK
2	5460.00	54.57	-0.39	54.18	74.00	-19.82	PEAK
3	5466.25	56.64	-0.39	56.26	68.20	-11.95	PEAK
4	5470.00	54.85	-0.38	54.47	68.20	-13.73	PEAK
5	5667.50	113.95	-0.36	113.59	68.20	45.39	PEAK
6	5850.00	61.83	0.65	62.48	68.20	-5.72	PEAK
7	5866.25	61.64	0.70	62.34	68.20	-5.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

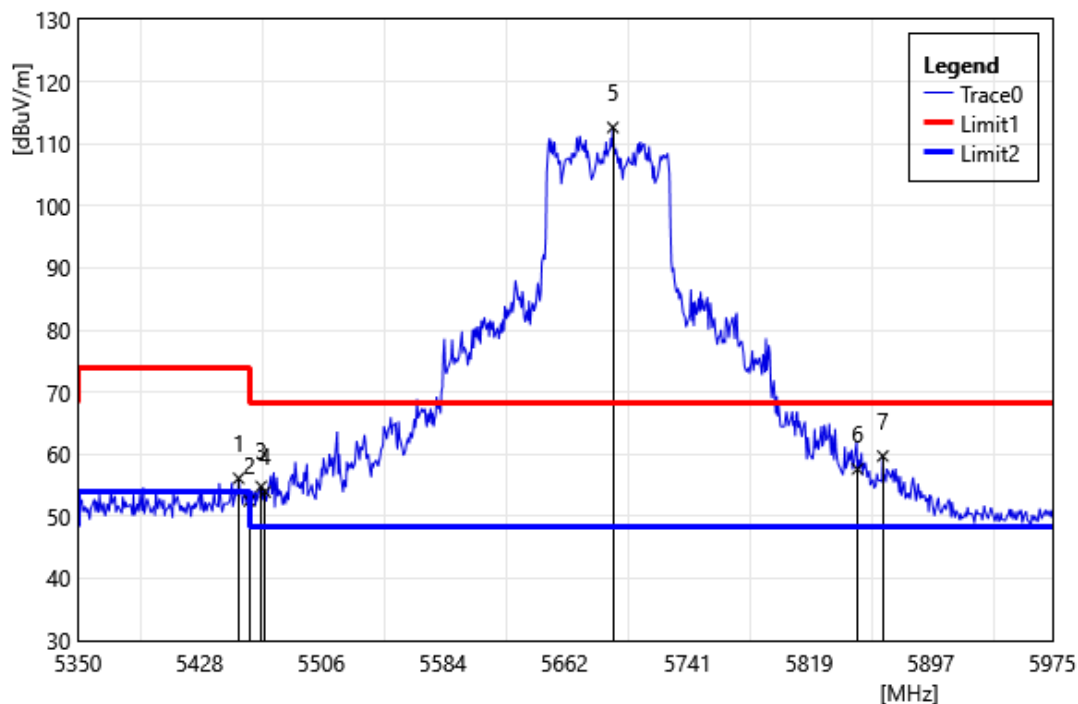


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.13	56.52	-0.40	56.13	74.00	-17.88	PEAK
2	5460.00	52.88	-0.39	52.49	74.00	-21.51	PEAK
3	5467.50	55.21	-0.39	54.82	68.20	-13.38	PEAK
4	5470.00	54.32	-0.38	53.94	68.20	-14.26	PEAK
5	5693.13	112.97	-0.33	112.64	68.20	44.44	PEAK
6	5850.00	56.97	0.65	57.62	68.20	-10.58	PEAK
7	5866.25	59.01	0.70	59.71	68.20	-8.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

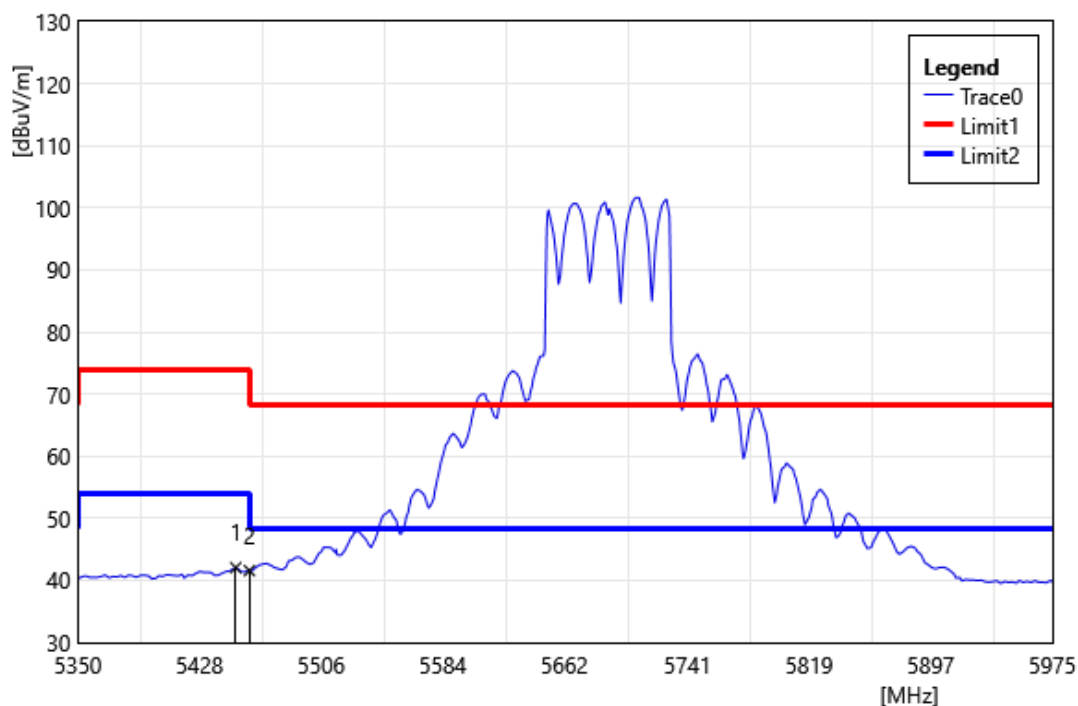


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.25	42.46	-0.40	42.06	54.00	-11.94	AVG
2	5460.00	41.96	-0.39	41.57	54.00	-12.43	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

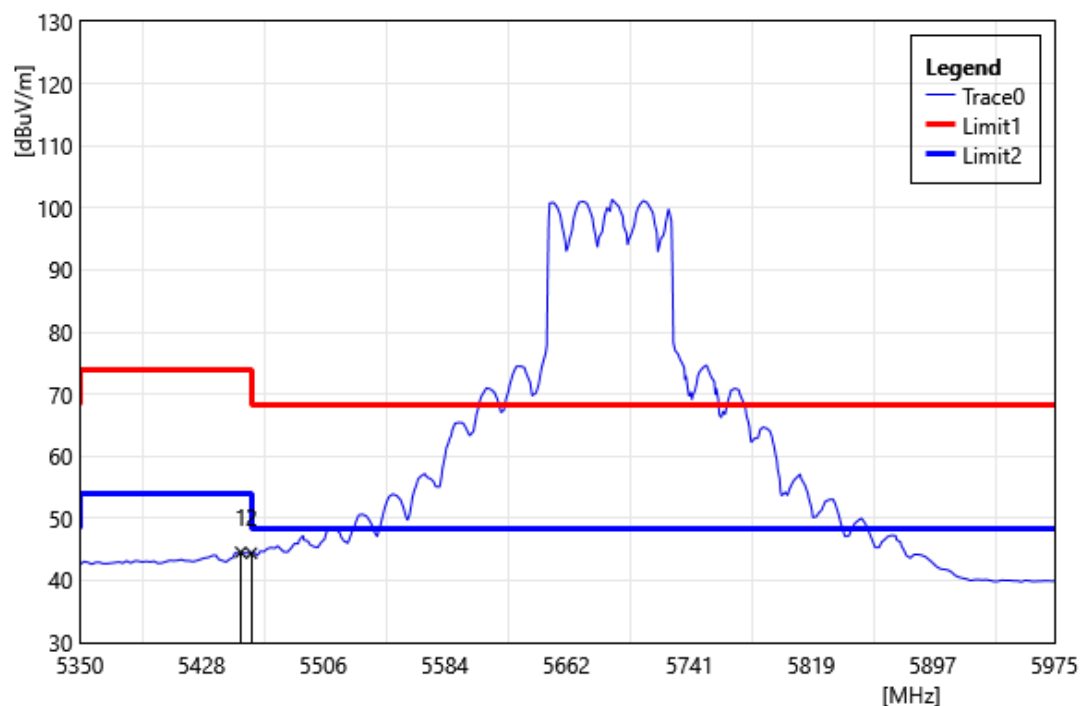


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.13	44.93	-0.40	44.53	54.00	-9.47	AVG
2	5460.00	44.77	-0.39	44.38	54.00	-9.62	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

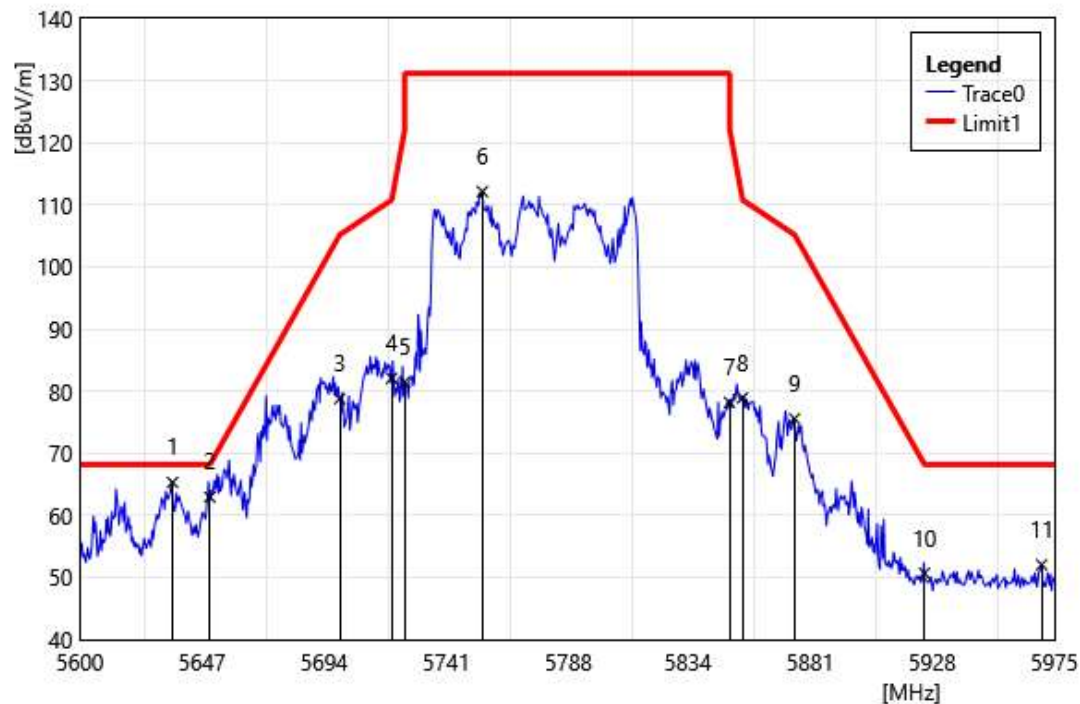


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5635.63	65.67	-0.37	65.30	68.20	-2.90	PEAK
2	5650.00	63.31	-0.38	62.93	68.20	-5.27	PEAK
3	5700.00	79.12	-0.32	78.79	105.20	-26.41	PEAK
4	5720.00	82.19	-0.10	82.09	110.80	-28.71	PEAK
5	5725.00	81.54	-0.04	81.50	122.20	-40.70	PEAK
6	5754.88	111.88	0.26	112.14	131.20	-19.06	PEAK
7	5850.00	77.54	0.65	78.19	122.20	-44.01	PEAK
8	5855.00	78.27	0.66	78.93	110.80	-31.87	PEAK
9	5875.00	74.82	0.73	75.55	105.20	-29.65	PEAK
10	5925.00	50.00	0.68	50.68	68.20	-17.52	PEAK
11	5970.13	51.42	0.63	52.05	68.20	-16.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

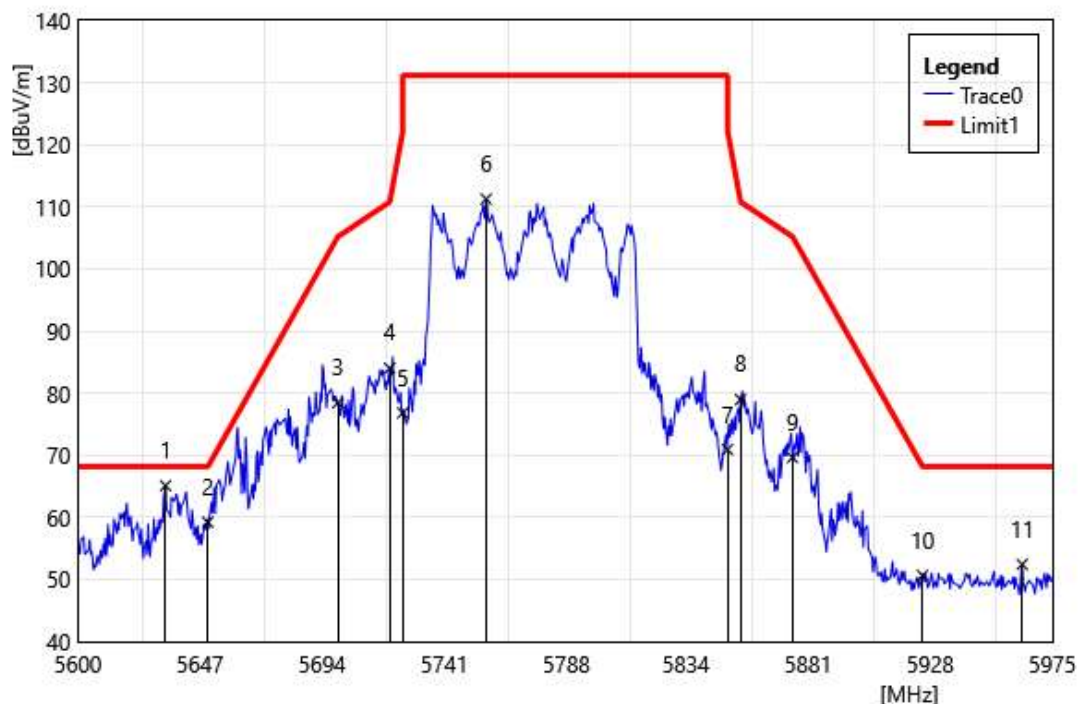


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.75	65.46	-0.36	65.10	68.20	-3.10	PEAK
2	5650.00	59.59	-0.38	59.21	68.20	-8.99	PEAK
3	5700.00	78.78	-0.32	78.46	105.20	-26.74	PEAK
4	5720.00	84.11	-0.10	84.01	110.80	-26.79	PEAK
5	5725.00	76.86	-0.04	76.82	122.20	-45.38	PEAK
6	5757.13	111.00	0.27	111.27	131.20	-19.93	PEAK
7	5850.00	70.27	0.65	70.91	122.20	-51.29	PEAK
8	5855.00	78.31	0.66	78.97	110.80	-31.83	PEAK
9	5875.00	68.92	0.73	69.65	105.20	-35.55	PEAK
10	5925.00	49.97	0.68	50.65	68.20	-17.55	PEAK
11	5963.38	51.83	0.60	52.43	68.20	-15.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

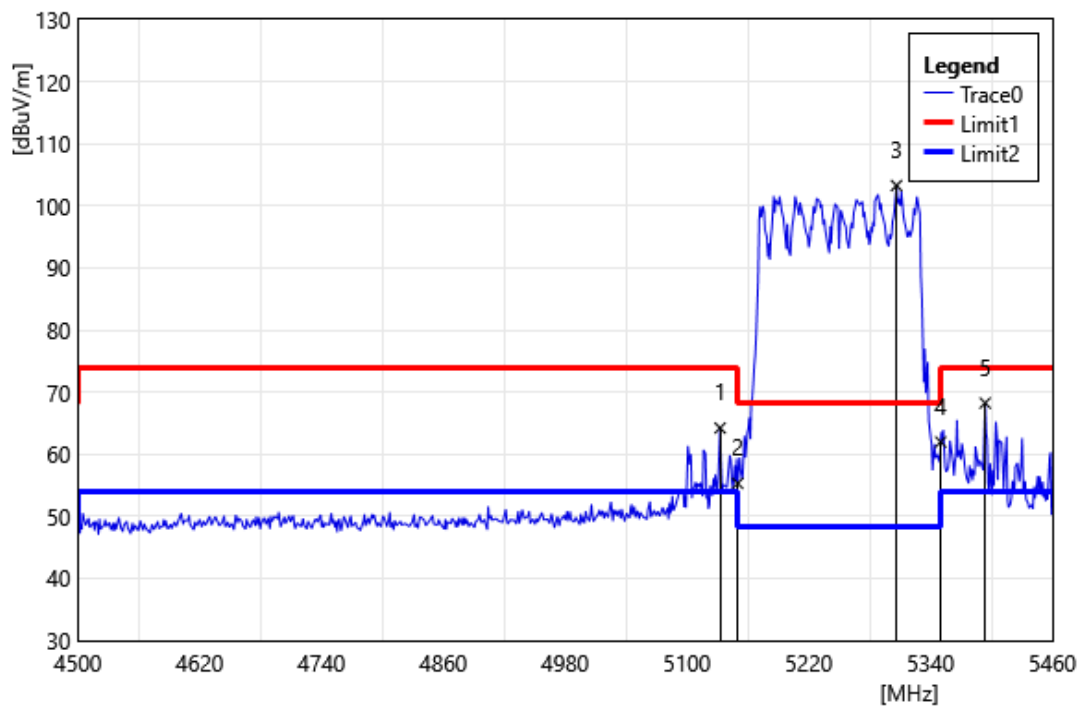


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5132.64	65.10	-0.87	64.23	74.00	-9.77	PEAK
2	5150.00	56.22	-0.89	55.33	74.00	-18.67	PEAK
3	5306.40	104.85	-1.58	103.27	68.20	35.07	PEAK
4	5350.00	63.25	-1.27	61.98	74.00	-12.02	PEAK
5	5393.76	69.21	-0.96	68.25	74.00	-5.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

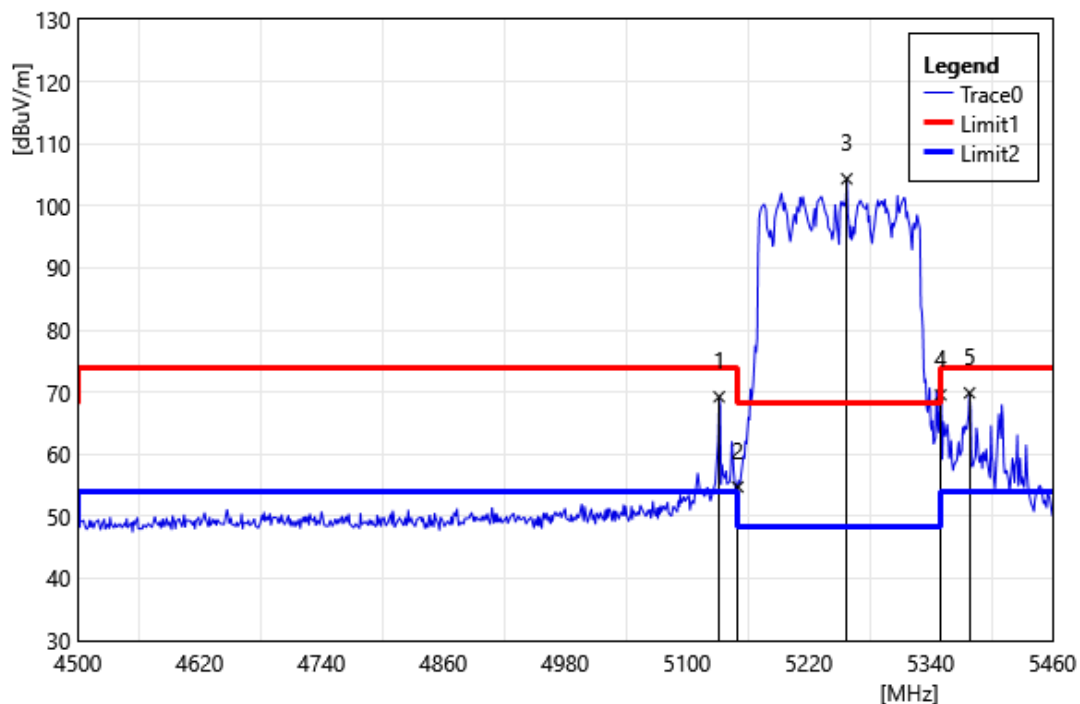


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5131.68	70.12	-0.87	69.25	74.00	-4.75	PEAK
2	5150.00	55.63	-0.89	54.74	74.00	-19.26	PEAK
3	5257.44	105.86	-1.50	104.37	68.20	36.17	PEAK
4	5350.00	70.84	-1.27	69.56	74.00	-4.44	PEAK
5	5378.40	70.96	-1.07	69.89	74.00	-4.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

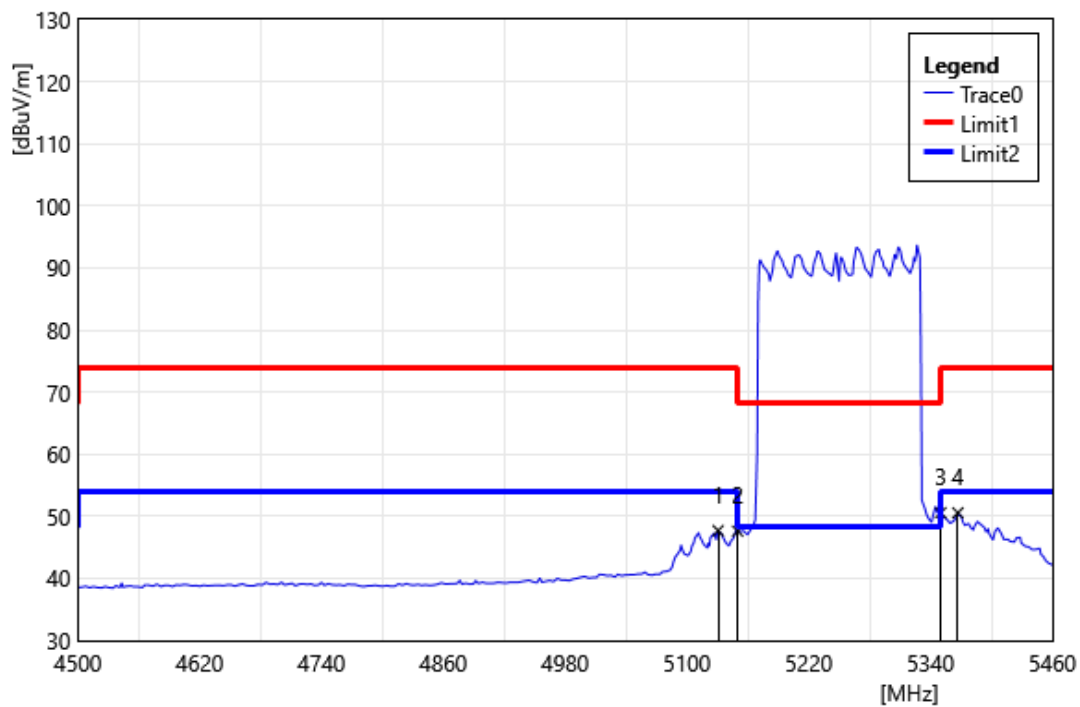


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5130.72	48.58	-0.87	47.71	54.00	-6.30	AVG
2	5150.00	48.51	-0.89	47.62	54.00	-6.38	AVG
3	5350.00	51.84	-1.27	50.57	54.00	-3.43	AVG
4	5366.88	51.71	-1.15	50.56	54.00	-3.44	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

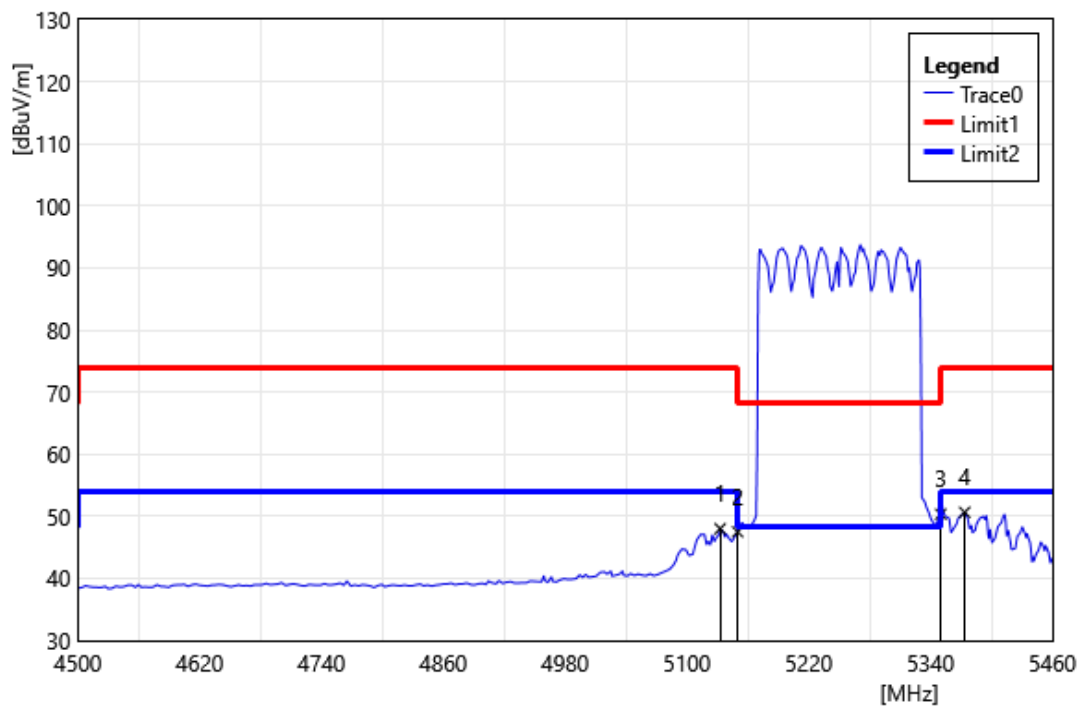


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5132.64	48.88	-0.87	48.01	54.00	-5.99	AVG
2	5150.00	48.40	-0.89	47.51	54.00	-6.49	AVG
3	5350.00	51.64	-1.27	50.36	54.00	-3.64	AVG
4	5373.60	51.76	-1.10	50.66	54.00	-3.34	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

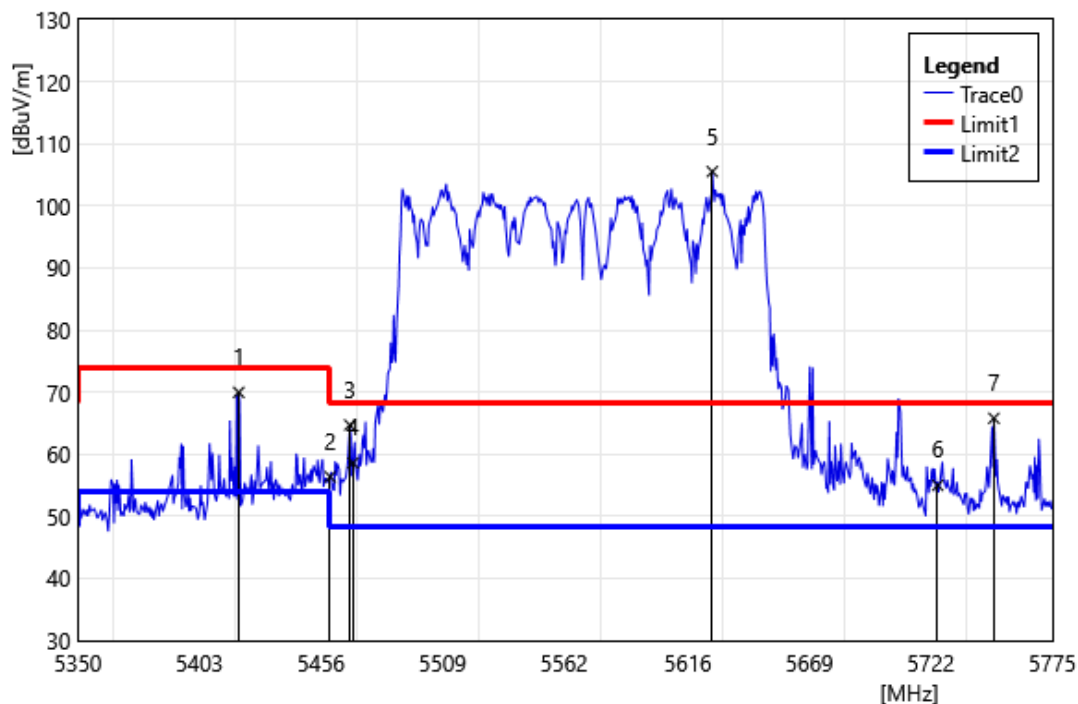


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5420.13	70.75	-0.78	69.97	74.00	-4.03	PEAK
2	5460.00	56.92	-0.55	56.37	74.00	-17.63	PEAK
3	5468.58	65.25	-0.54	64.71	68.20	-3.49	PEAK
4	5470.00	59.13	-0.54	58.59	68.20	-9.61	PEAK
5	5626.68	106.12	-0.59	105.53	68.20	37.33	PEAK
6	5725.00	55.30	-0.32	54.98	68.20	-13.22	PEAK
7	5749.50	65.87	-0.07	65.80	68.20	-2.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Horizontal		
Remark:			

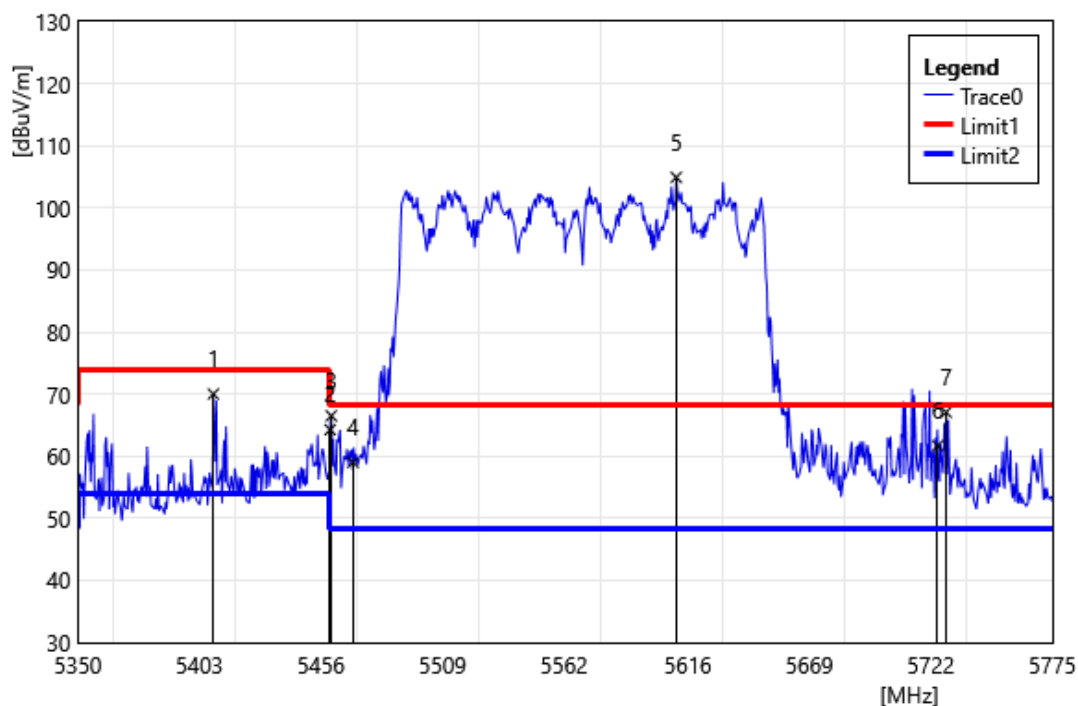


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5409.08	70.88	-0.85	70.03	74.00	-3.97	PEAK
2	5460.00	64.83	-0.55	64.28	74.00	-9.72	PEAK
3	5460.50	67.06	-0.55	66.52	68.20	-1.69	PEAK
4	5470.00	59.55	-0.54	59.01	68.20	-9.19	PEAK
5	5610.95	105.49	-0.57	104.92	68.20	36.72	PEAK
6	5725.00	62.02	-0.32	61.70	68.20	-6.50	PEAK
7	5728.68	67.39	-0.29	67.10	68.20	-1.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

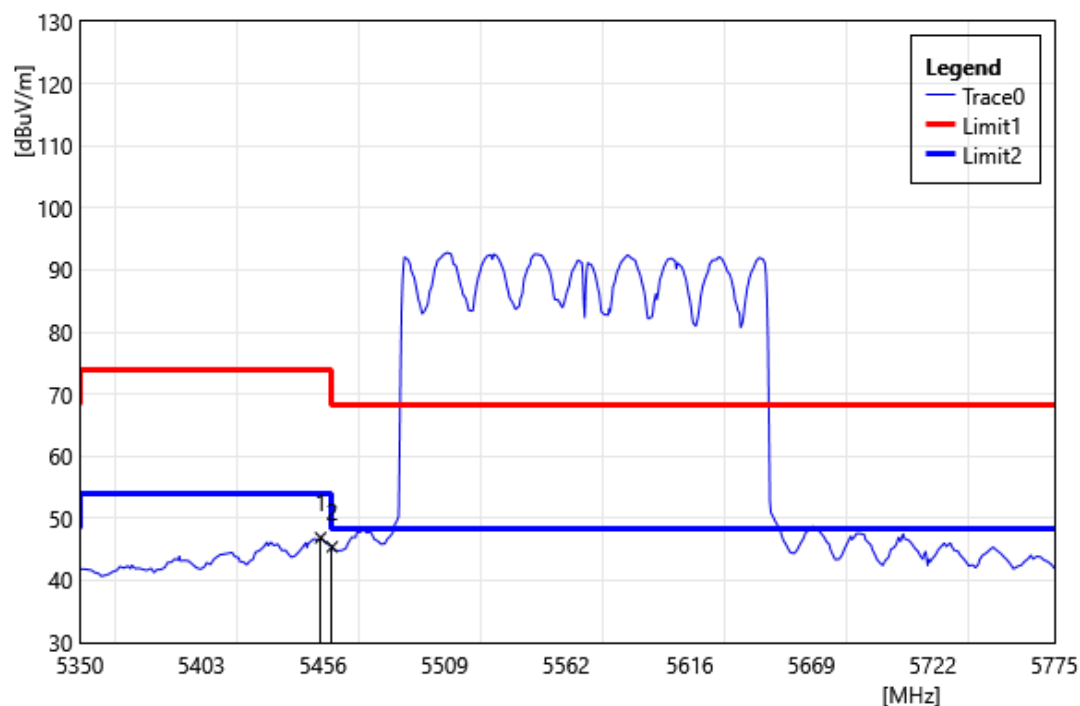

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.98	47.43	-0.56	46.87	54.00	-7.13	AVG
2	5460.00	45.96	-0.55	45.41	54.00	-8.59	AVG


Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

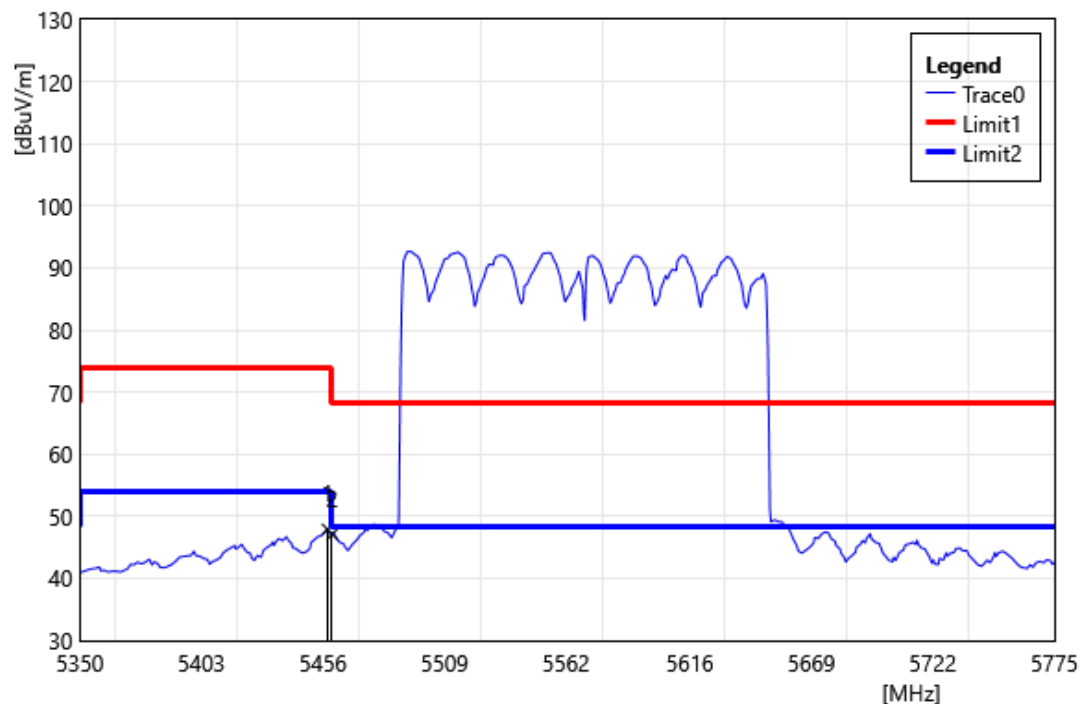

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.95	48.48	-0.56	47.92	54.00	-6.08	AVG
2	5460.00	47.65	-0.55	47.10	54.00	-6.90	AVG


Beamforming on- Band Edge

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

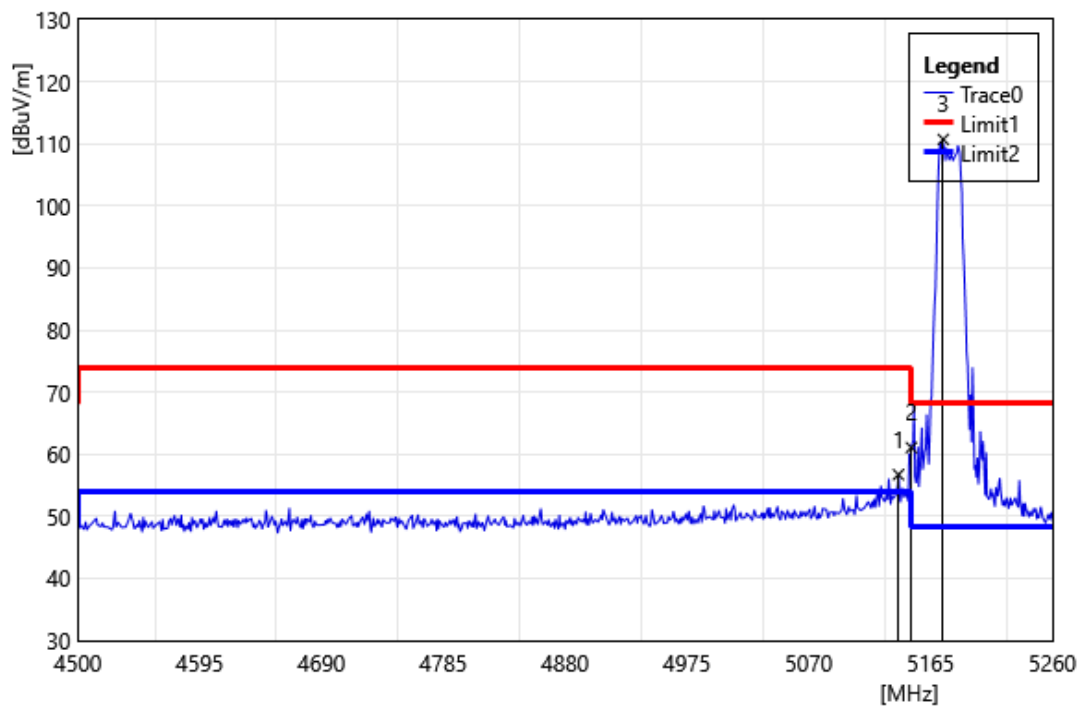


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.92	57.62	-0.90	56.72	74.00	-17.28	PEAK
2	5150.00	61.97	-0.91	61.07	74.00	-12.93	PEAK
3	5174.88	111.74	-1.03	110.71	68.20	42.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

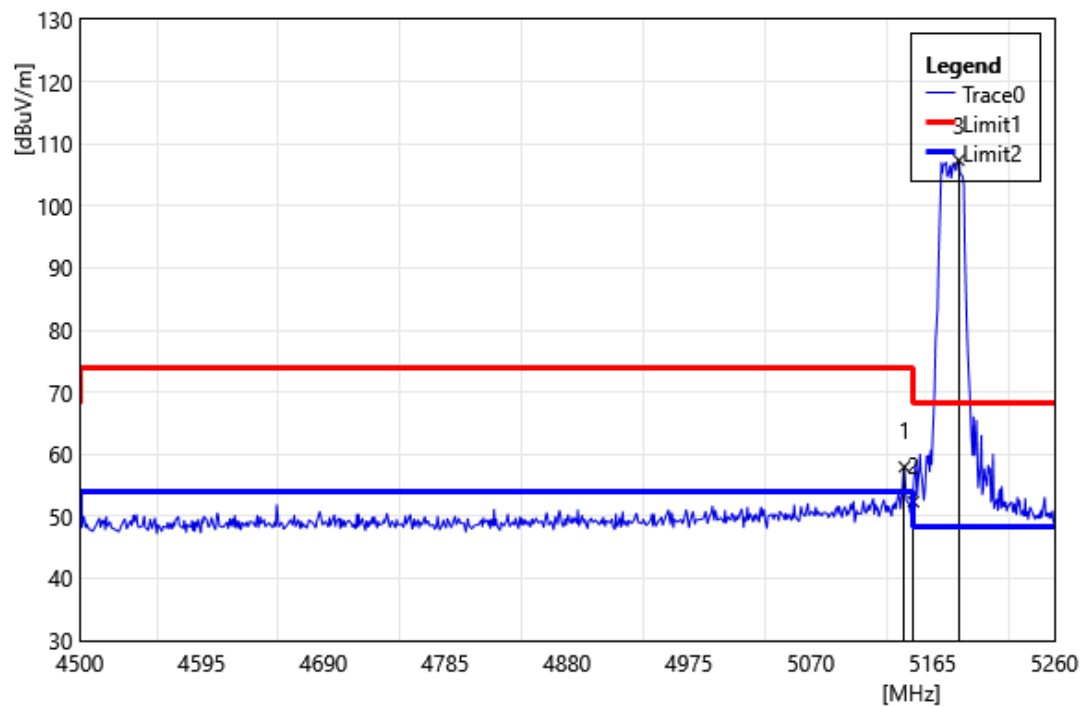


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	58.86	-0.90	57.96	74.00	-16.04	PEAK
2	5150.00	53.25	-0.91	52.35	74.00	-21.65	PEAK
3	5185.52	108.41	-1.08	107.33	68.20	39.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Vertical		
Remark:			

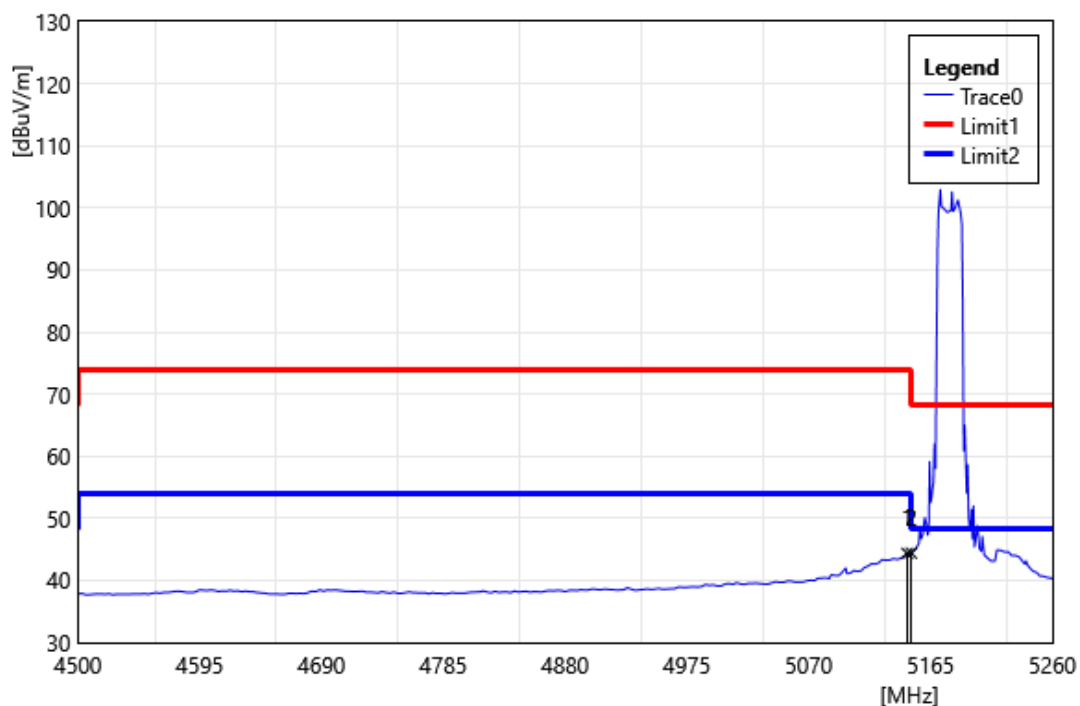


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	45.26	-0.90	44.36	54.00	-9.64	AVG
2	5150.00	45.32	-0.91	44.41	54.00	-9.59	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5180 MHz		
Polarization:	Horizontal		
Remark:			

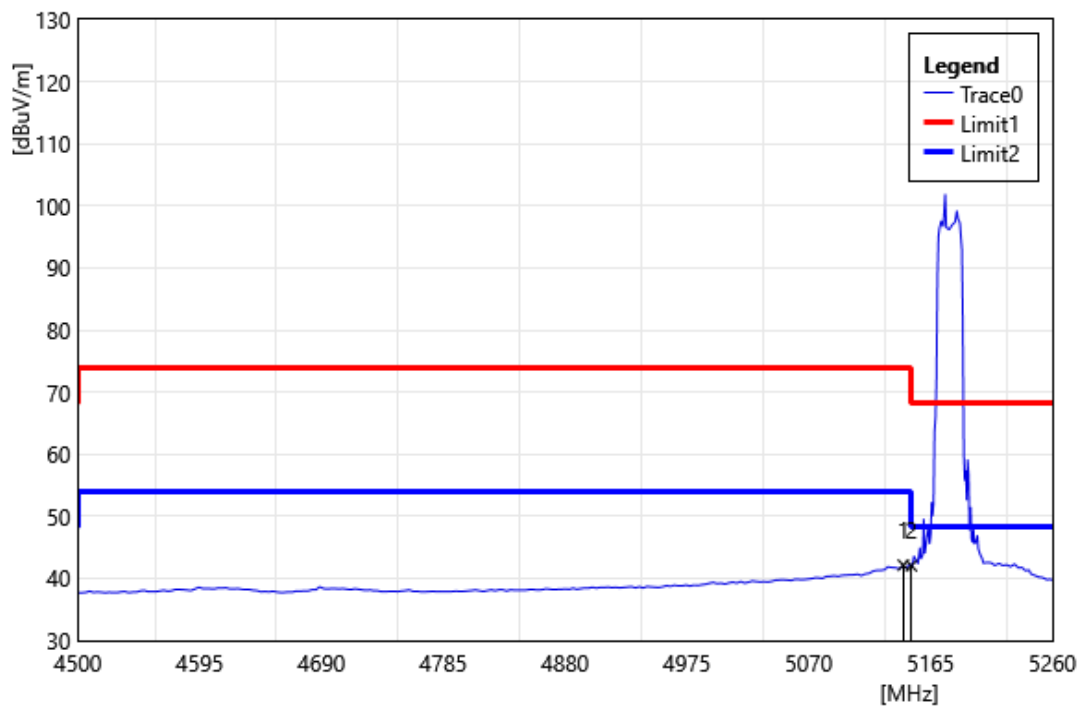


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	43.05	-0.90	42.15	54.00	-11.85	AVG
2	5150.00	42.95	-0.91	42.05	54.00	-11.95	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

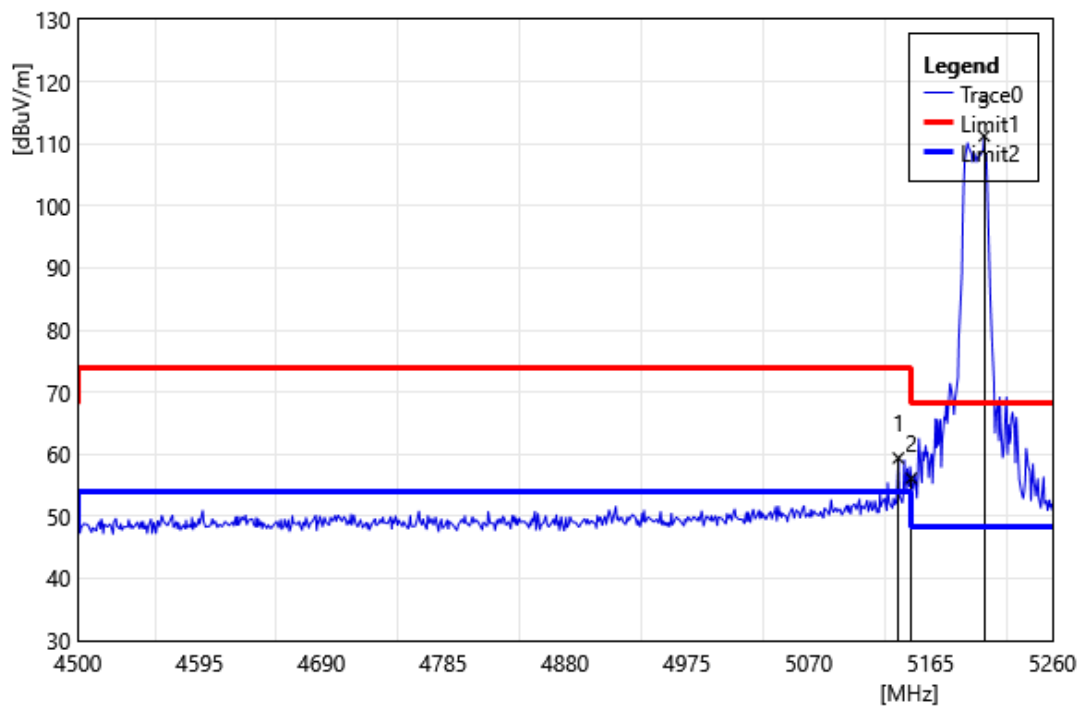


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.92	60.28	-0.90	59.39	74.00	-14.62	PEAK
2	5150.00	57.02	-0.91	56.11	74.00	-17.89	PEAK
3	5206.80	112.44	-1.20	111.24	68.20	43.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

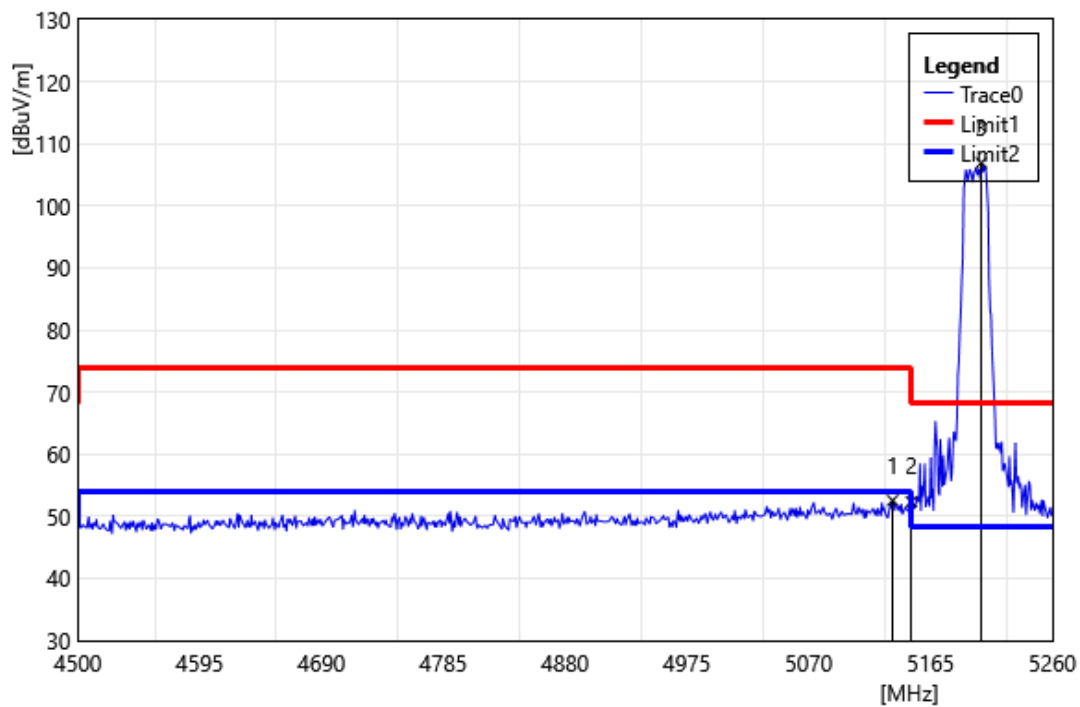


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5135.36	53.45	-0.89	52.56	74.00	-21.44	PEAK
2	5150.00	53.26	-0.91	52.36	74.00	-21.64	PEAK
3	5204.52	108.11	-1.19	106.92	68.20	38.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

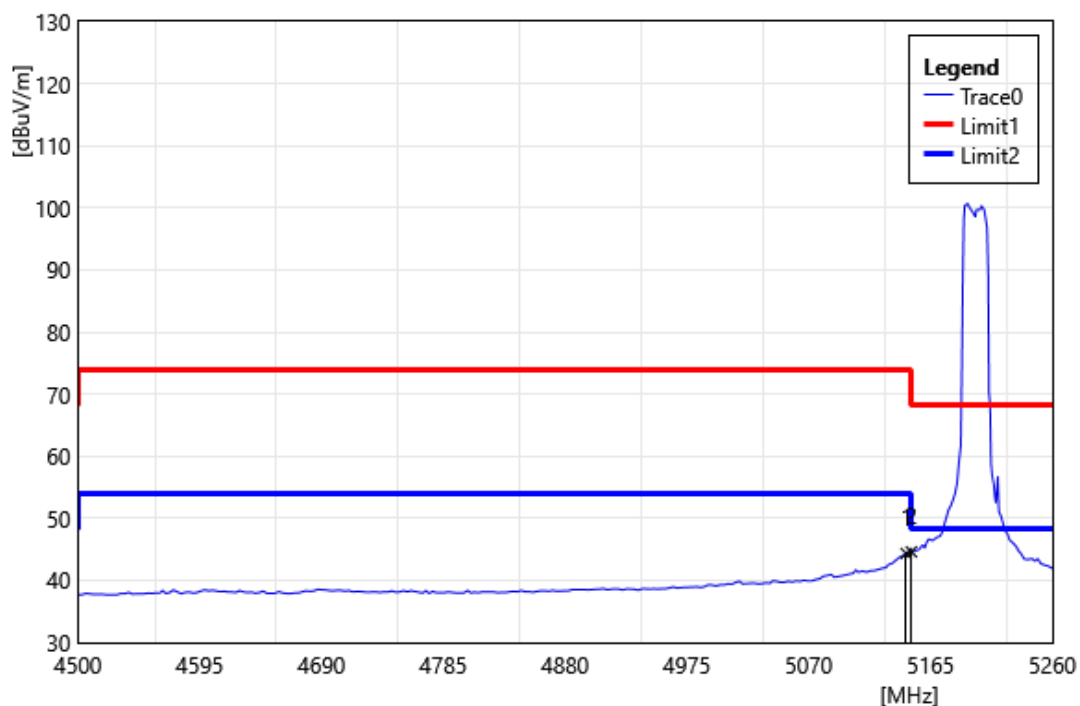


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	45.25	-0.90	44.35	54.00	-9.65	AVG
2	5150.00	45.51	-0.91	44.60	54.00	-9.40	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

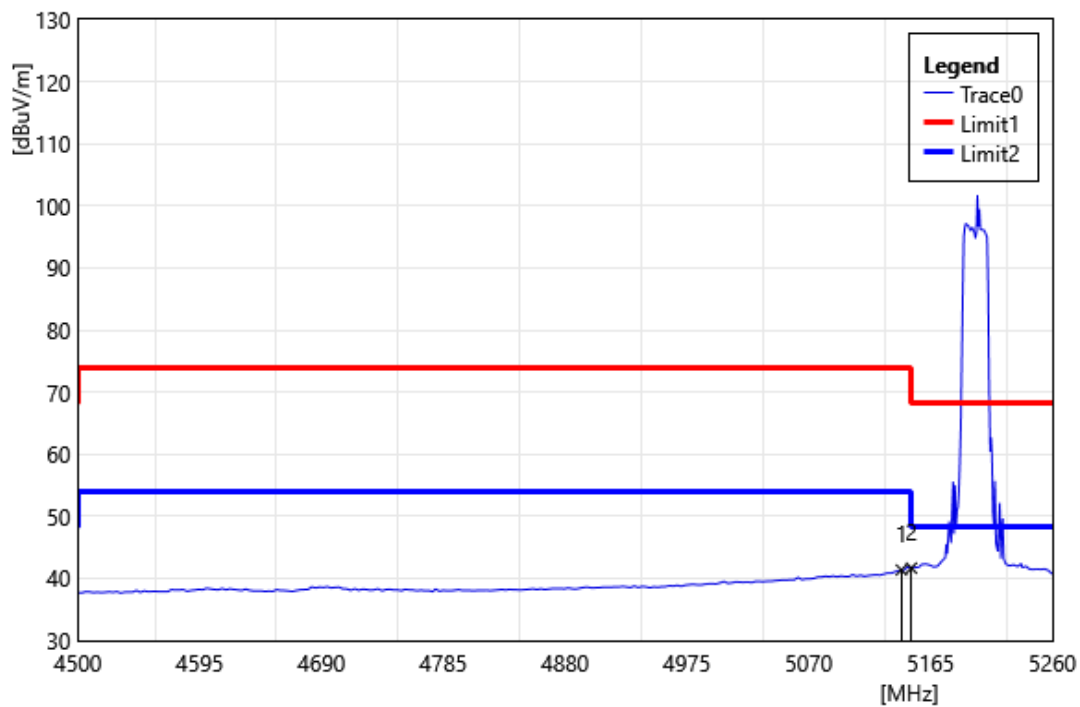


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.20	42.26	-0.90	41.36	54.00	-12.64	AVG
2	5150.00	42.57	-0.91	41.66	54.00	-12.34	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

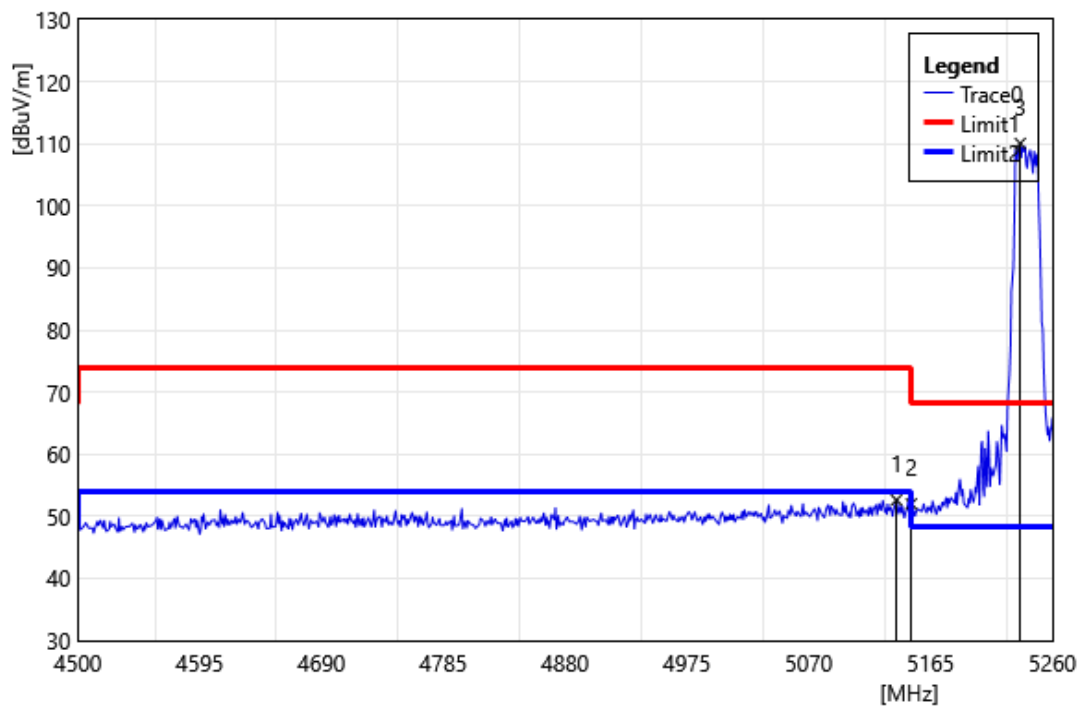


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5138.40	53.53	-0.90	52.63	74.00	-21.37	PEAK
2	5150.00	52.92	-0.91	52.01	74.00	-21.99	PEAK
3	5234.92	111.45	-1.40	110.05	68.20	41.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240 MHz		
Polarization:	Horizontal		
Remark:			

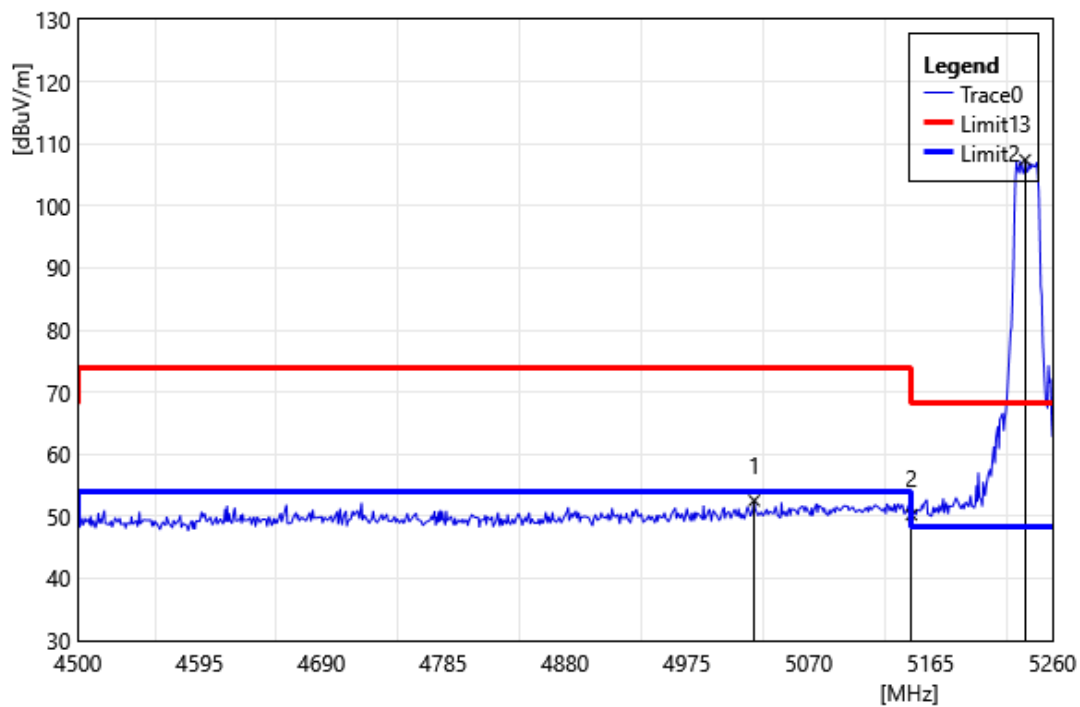


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5027.44	53.92	-1.37	52.55	74.00	-21.45	PEAK
2	5150.00	51.17	-0.91	50.26	74.00	-23.74	PEAK
3	5238.72	108.85	-1.42	107.43	68.20	39.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

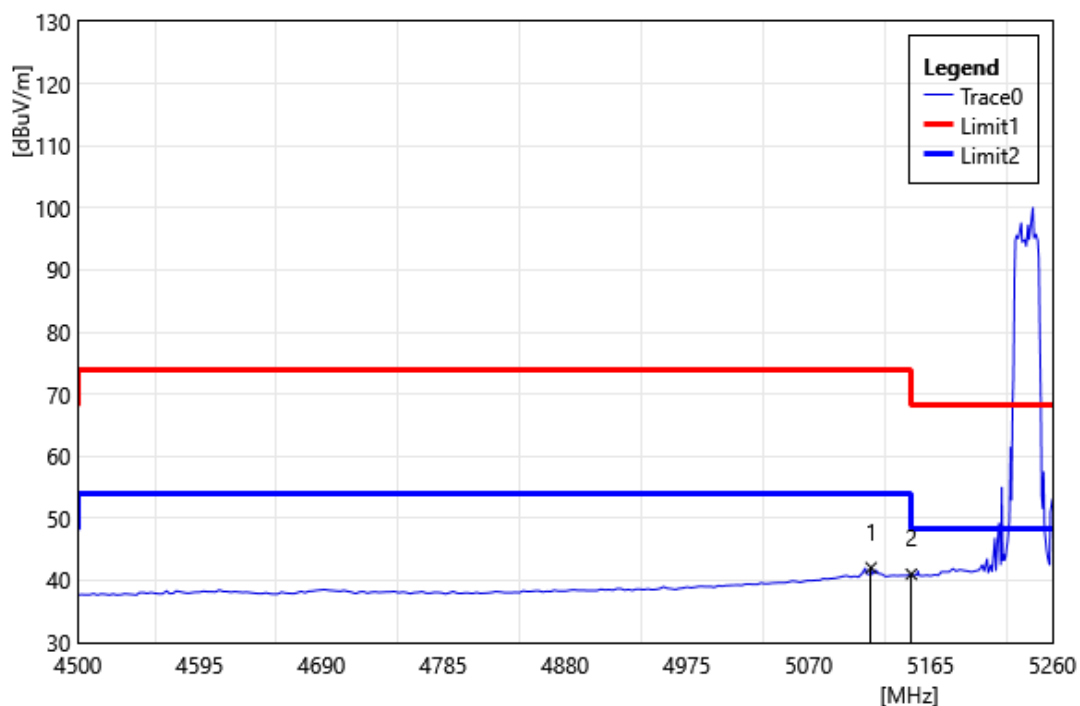


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5118.64	42.93	-0.88	42.05	54.00	-11.95	AVG
2	5150.00	41.91	-0.91	41.00	54.00	-13.00	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5240 MHz		
Polarization:	Horizontal		
Remark:			

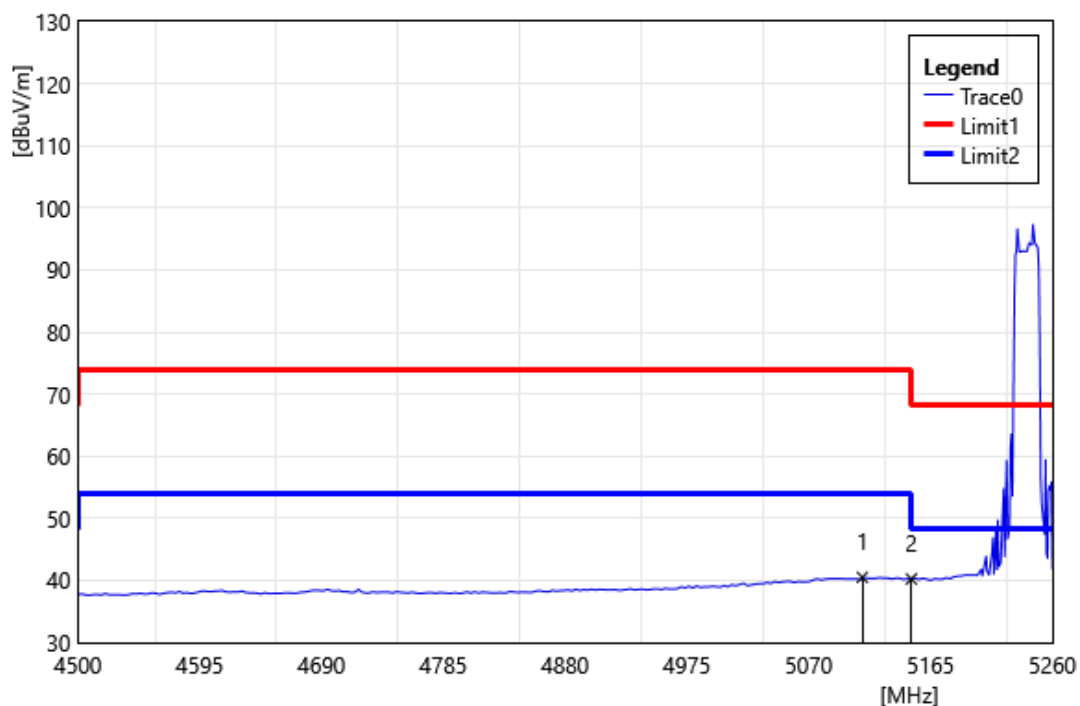


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5111.80	41.37	-0.87	40.50	54.00	-13.50	AVG
2	5150.00	41.15	-0.91	40.24	54.00	-13.76	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

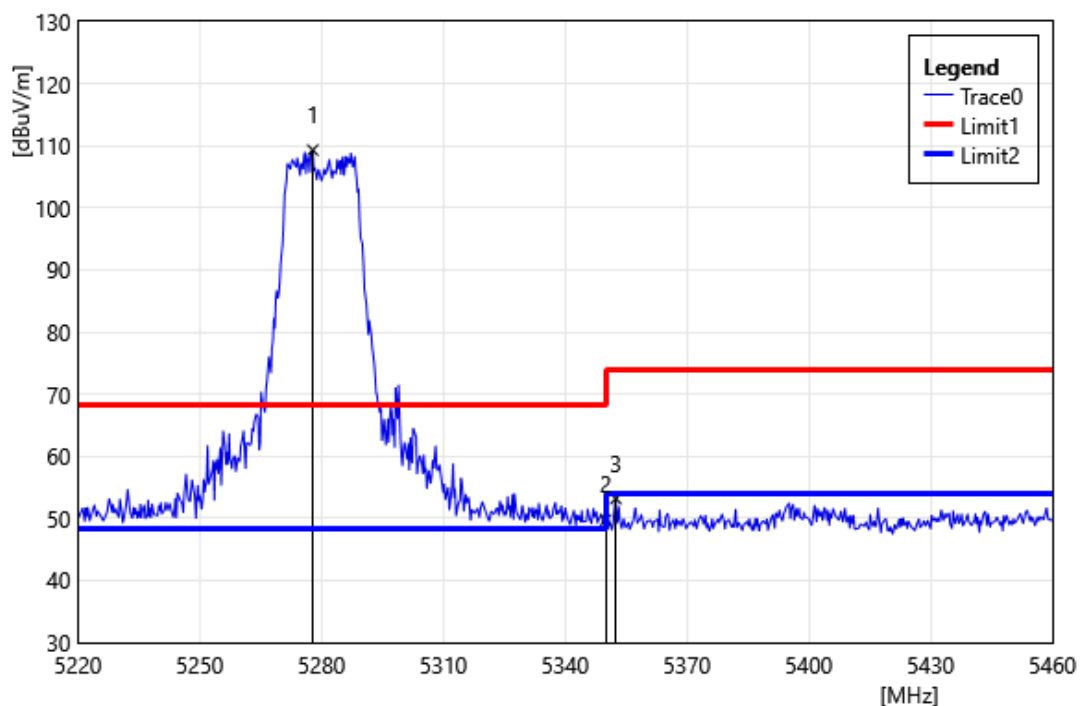


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5277.84	110.90	-1.58	109.32	68.20	41.12	PEAK
2	5350.00	51.05	-1.29	49.76	74.00	-24.24	PEAK
3	5352.48	54.44	-1.27	53.18	74.00	-20.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

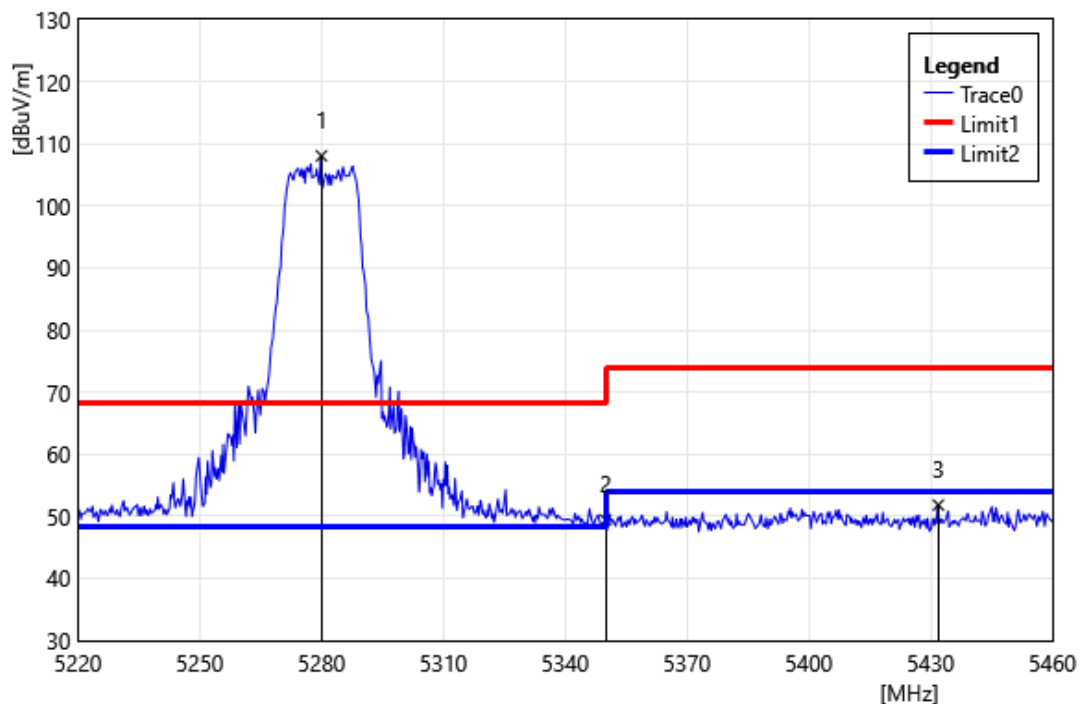


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5280.00	109.65	-1.59	108.06	68.20	39.86	PEAK
2	5350.00	50.71	-1.29	49.41	74.00	-24.59	PEAK
3	5431.92	52.54	-0.71	51.83	74.00	-22.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

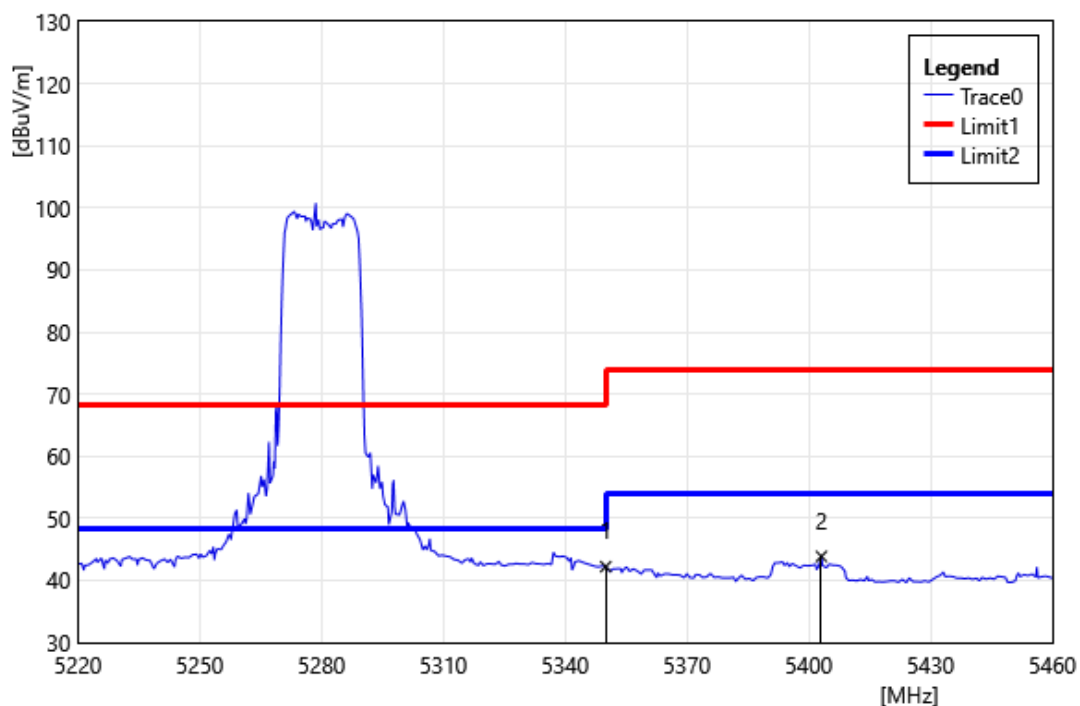


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	43.51	-1.29	42.22	54.00	-11.78	AVG
2	5403.12	44.79	-0.92	43.87	54.00	-10.13	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

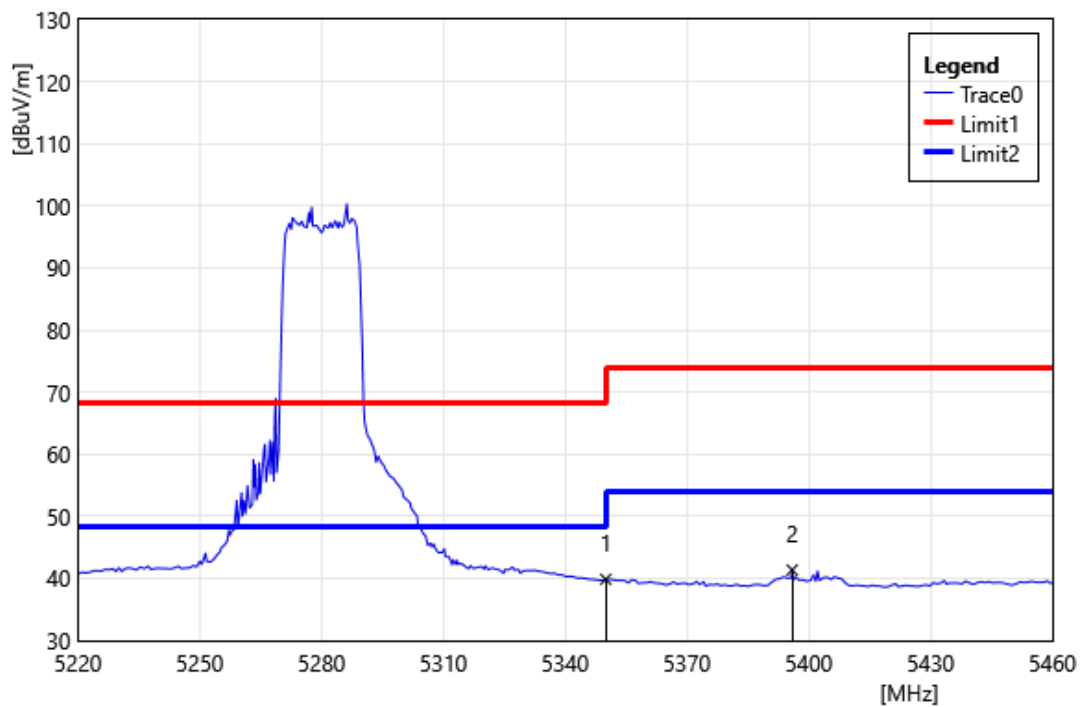


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.15	-1.29	39.86	54.00	-14.14	AVG
2	5395.92	42.34	-0.97	41.37	54.00	-12.63	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

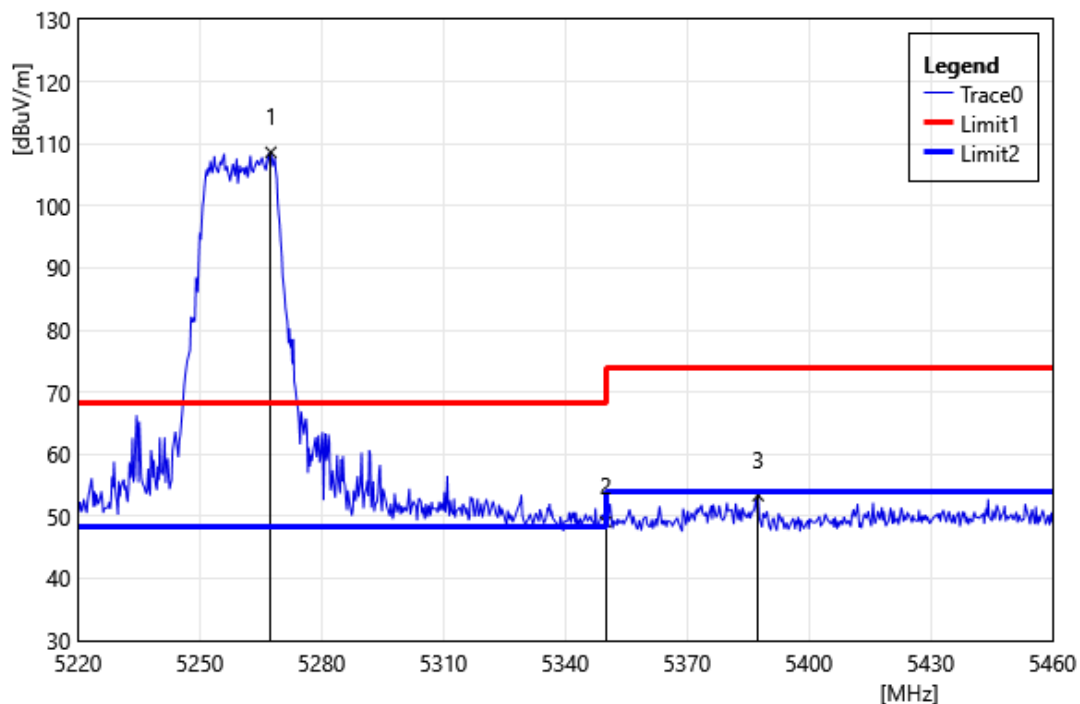


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5267.52	110.18	-1.55	108.63	68.20	40.43	PEAK
2	5350.00	50.39	-1.29	49.10	74.00	-24.90	PEAK
3	5387.52	54.37	-1.03	53.34	74.00	-20.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

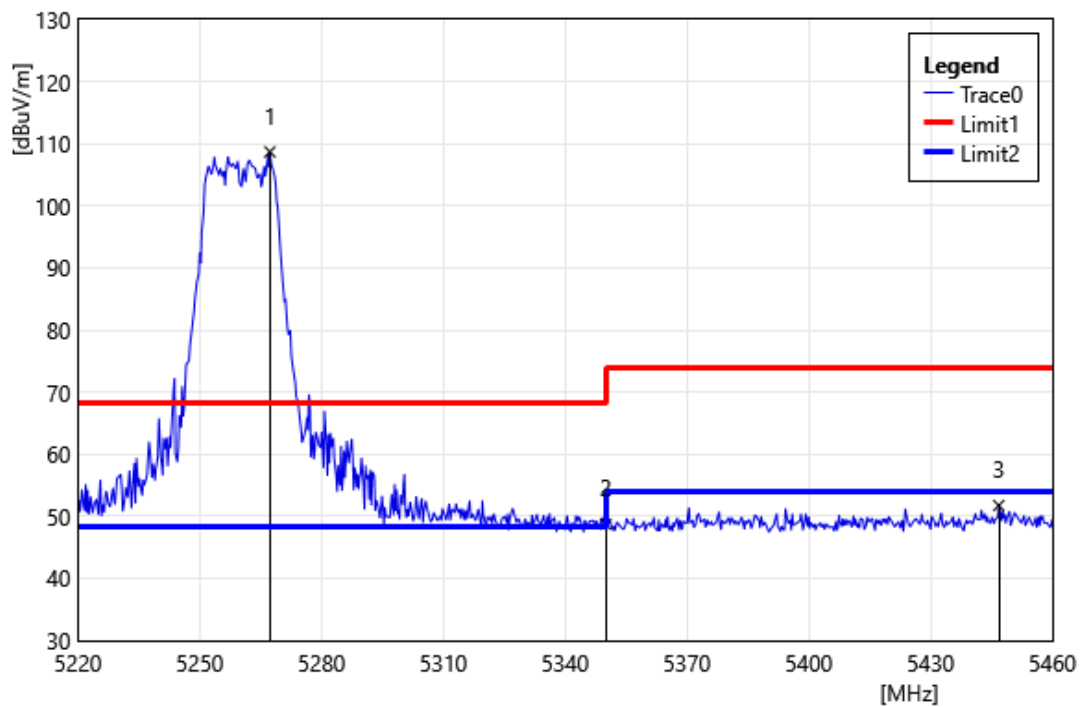


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5267.28	110.24	-1.55	108.69	68.20	40.49	PEAK
2	5350.00	50.04	-1.29	48.75	74.00	-25.25	PEAK
3	5446.80	52.36	-0.61	51.75	74.00	-22.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

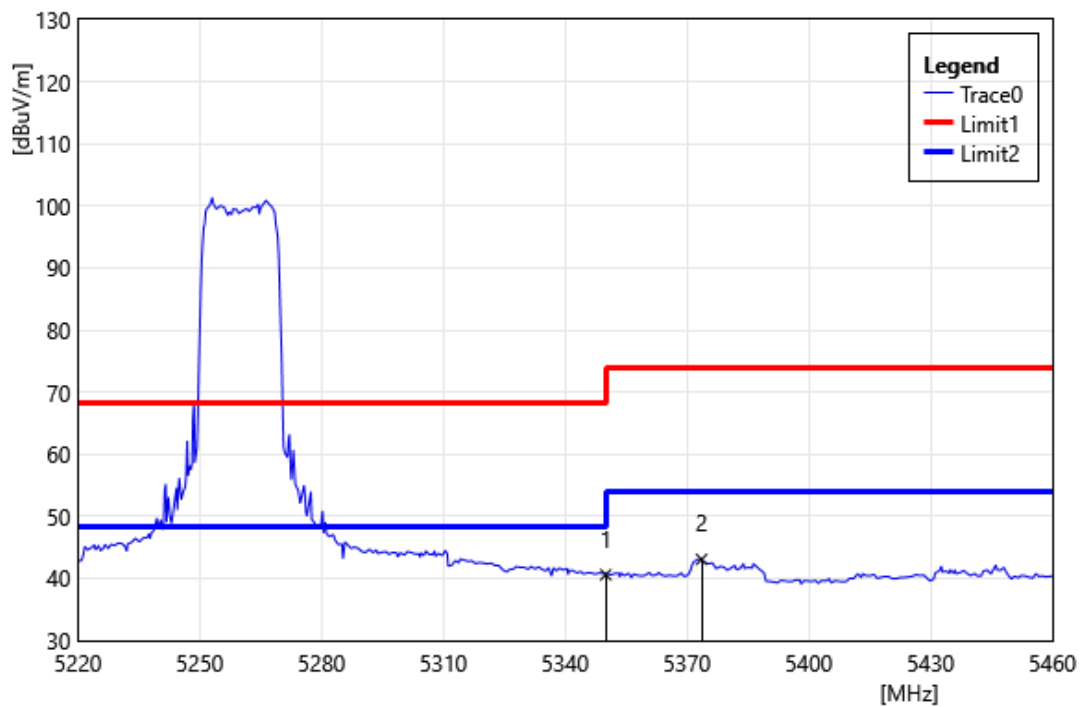


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.89	-1.29	40.60	54.00	-13.40	AVG
2	5373.60	44.19	-1.12	43.07	54.00	-10.93	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

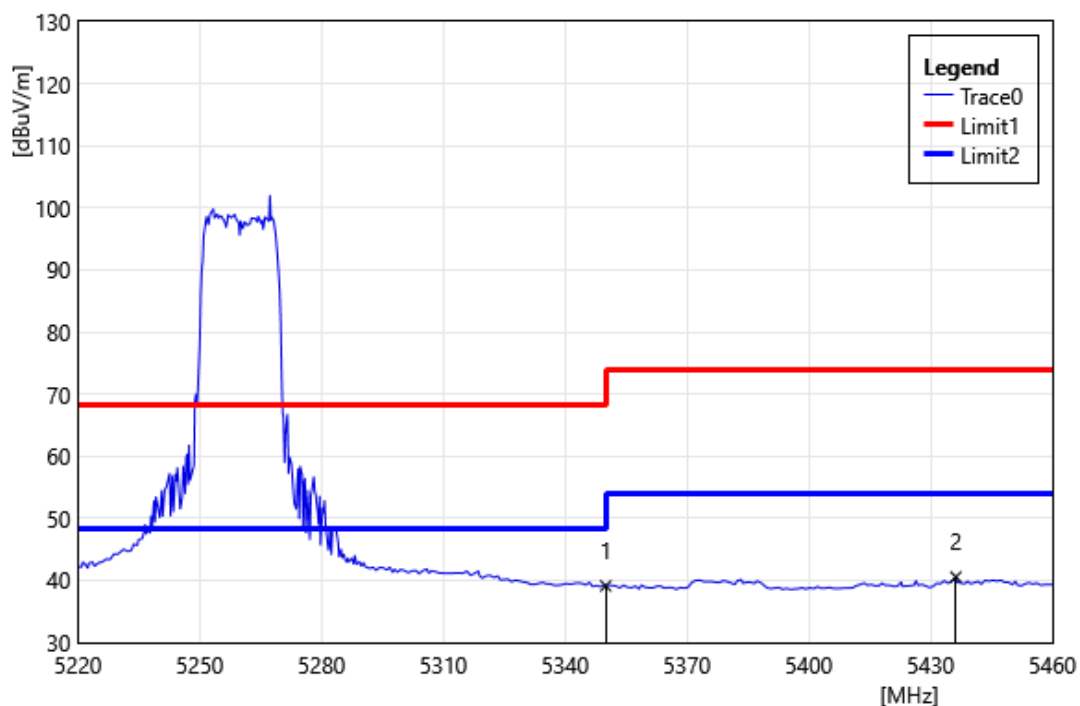


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.42	-1.29	39.13	54.00	-14.87	AVG
2	5436.24	41.24	-0.68	40.56	54.00	-13.44	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Vertical		
Remark:			

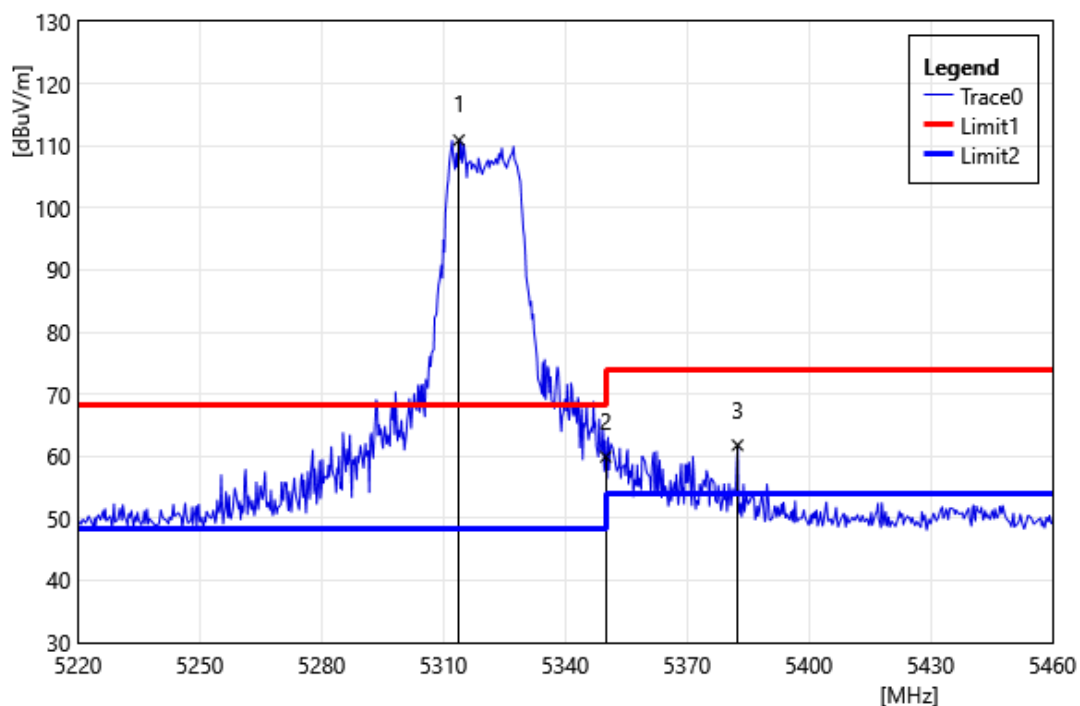


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5313.84	112.46	-1.55	110.91	68.20	42.71	PEAK
2	5350.00	61.21	-1.29	59.92	74.00	-14.08	PEAK
3	5382.48	62.84	-1.06	61.78	74.00	-12.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

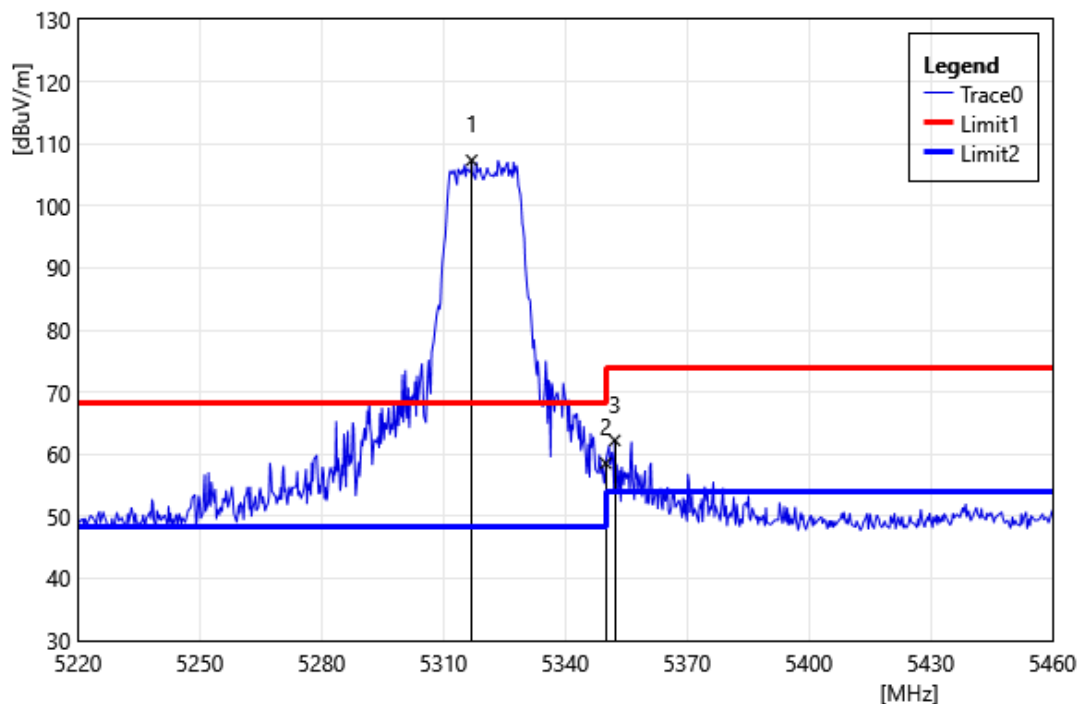


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5316.96	108.88	-1.53	107.35	68.20	39.15	PEAK
2	5350.00	59.84	-1.29	58.55	74.00	-15.45	PEAK
3	5352.24	63.51	-1.28	62.23	74.00	-11.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Vertical		
Remark:			

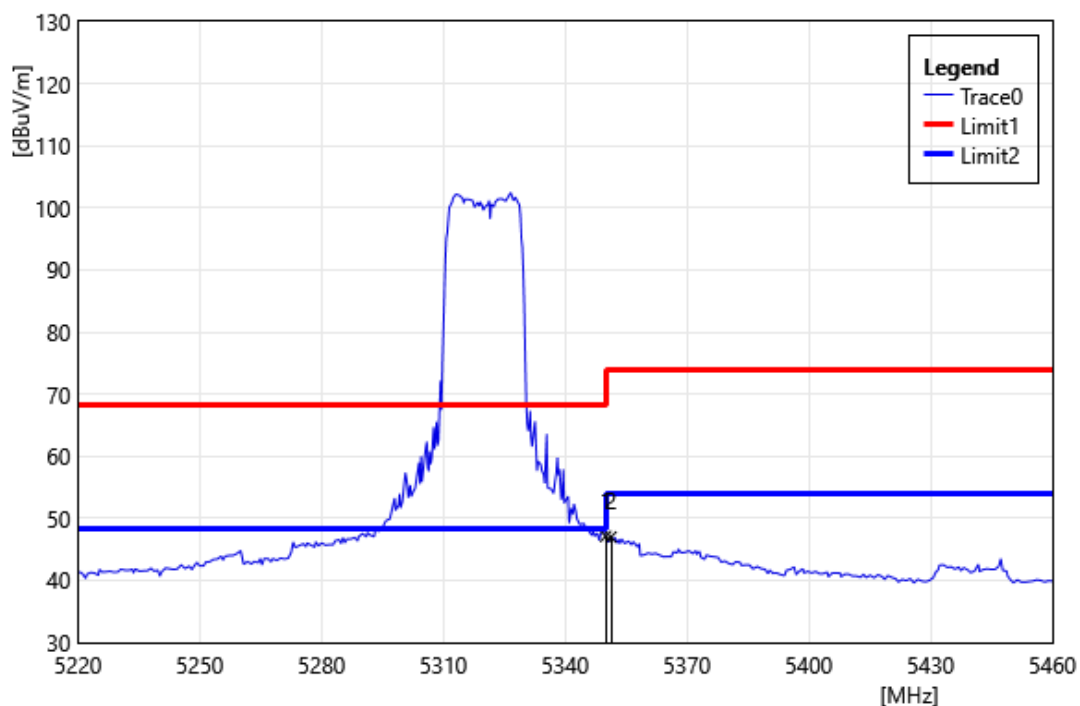


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	48.40	-1.29	47.10	54.00	-6.90	AVG
2	5351.28	48.27	-1.28	46.99	54.00	-7.01	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

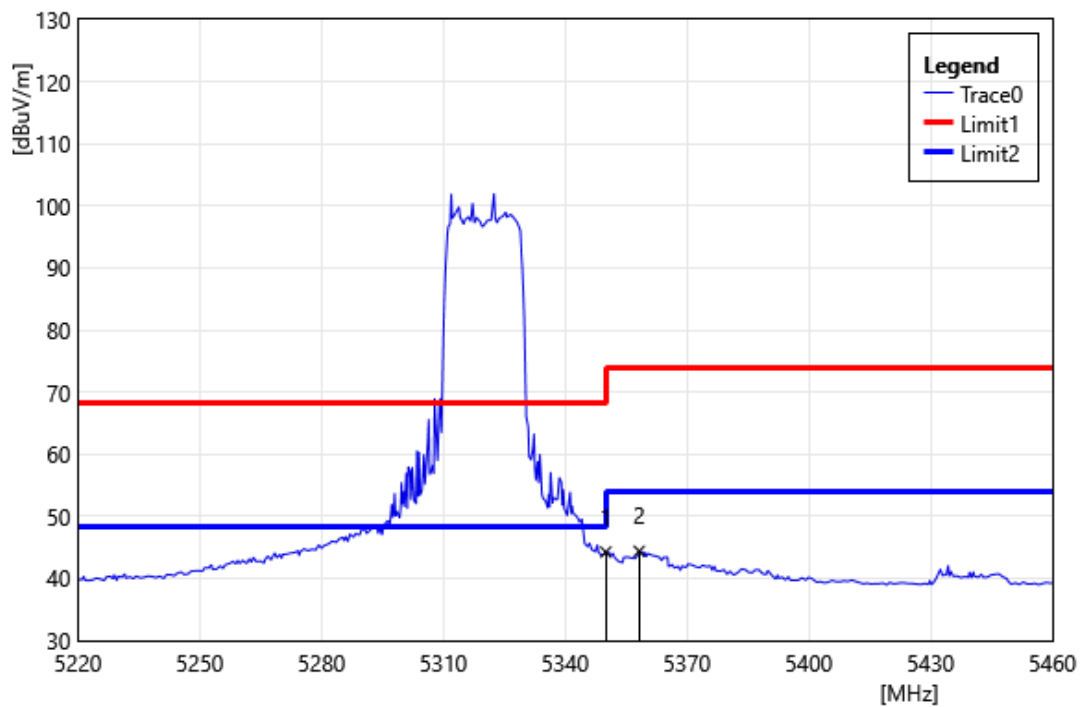


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	45.54	-1.29	44.25	54.00	-9.75	AVG
2	5358.24	45.62	-1.23	44.39	54.00	-9.61	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

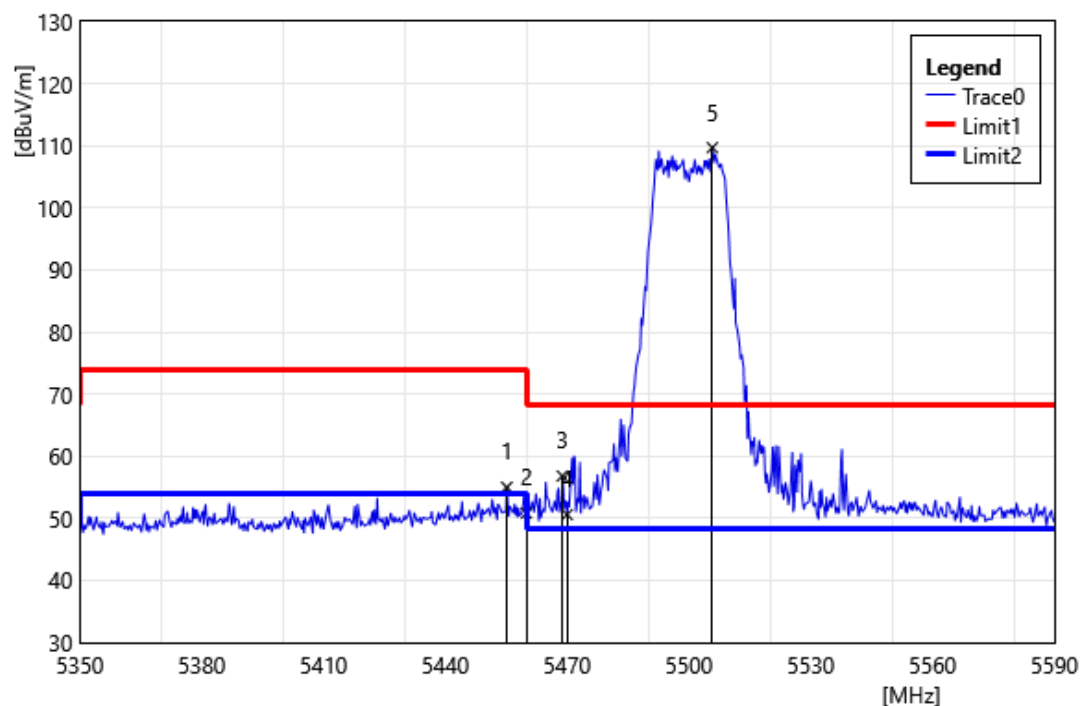


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.12	55.58	-0.58	55.00	74.00	-19.00	PEAK
2	5460.00	51.41	-0.57	50.84	74.00	-23.16	PEAK
3	5468.80	57.37	-0.56	56.81	68.20	-11.39	PEAK
4	5470.00	51.18	-0.56	50.62	68.20	-17.58	PEAK
5	5505.76	110.23	-0.53	109.70	68.20	41.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

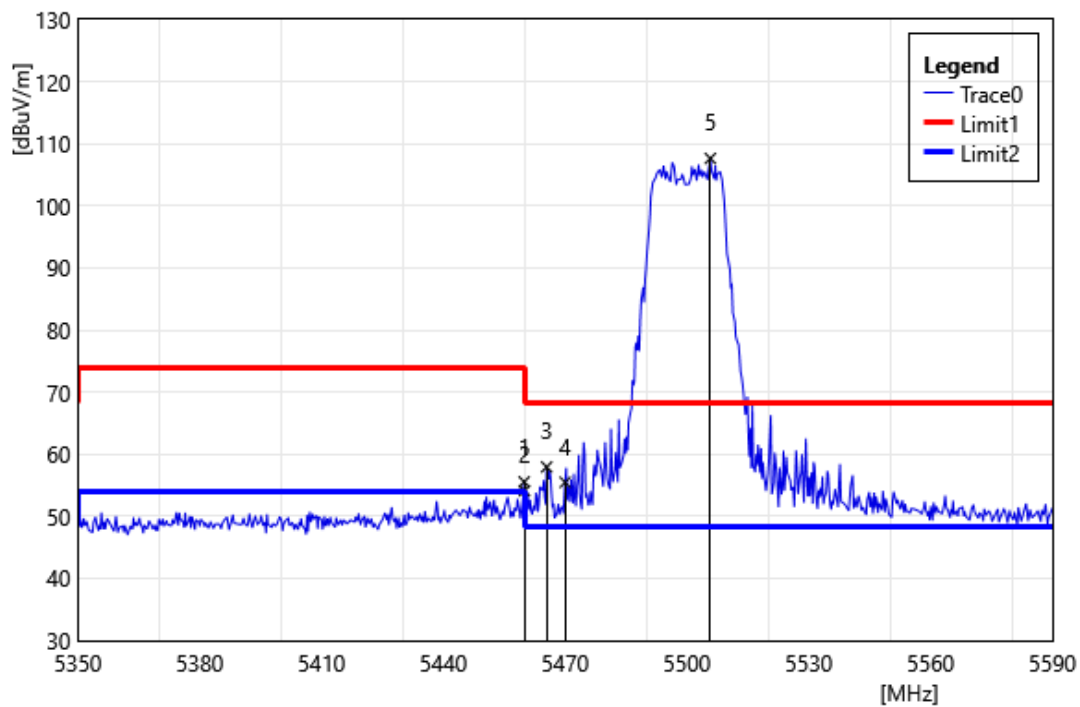


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.92	56.13	-0.57	55.56	74.00	-18.44	PEAK
2	5460.00	54.70	-0.57	54.13	74.00	-19.87	PEAK
3	5465.44	58.52	-0.57	57.95	68.20	-10.25	PEAK
4	5470.00	56.05	-0.56	55.49	68.20	-12.71	PEAK
5	5505.76	108.17	-0.53	107.64	68.20	39.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

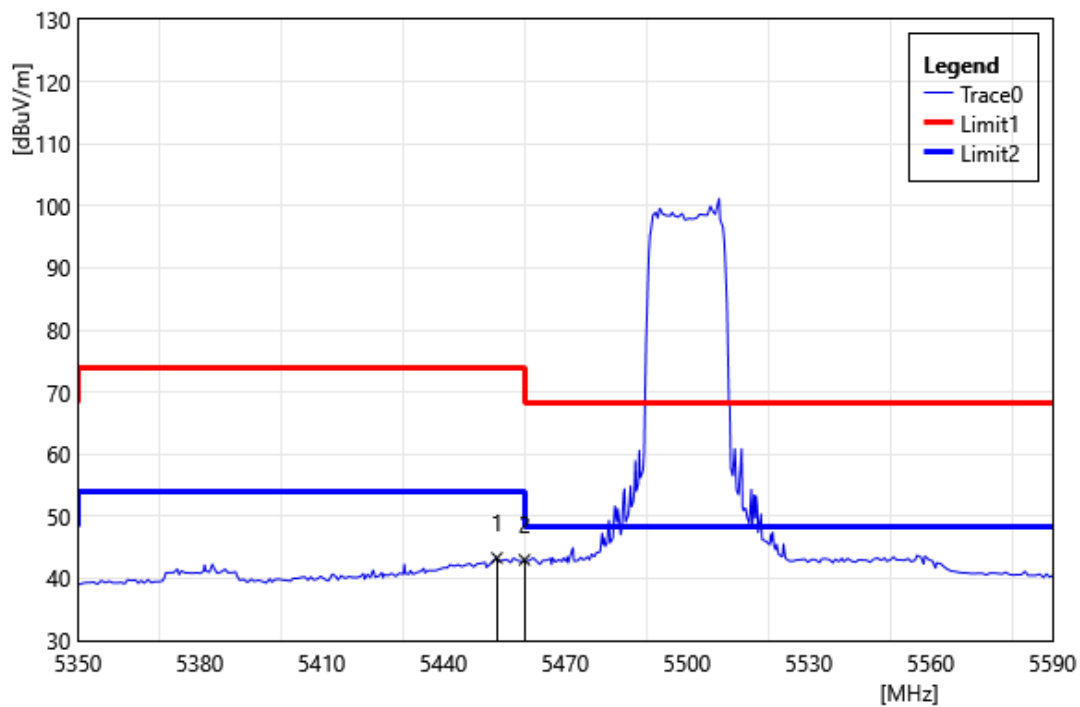


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.20	43.88	-0.58	43.30	54.00	-10.70	AVG
2	5460.00	43.57	-0.57	43.00	54.00	-11.00	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

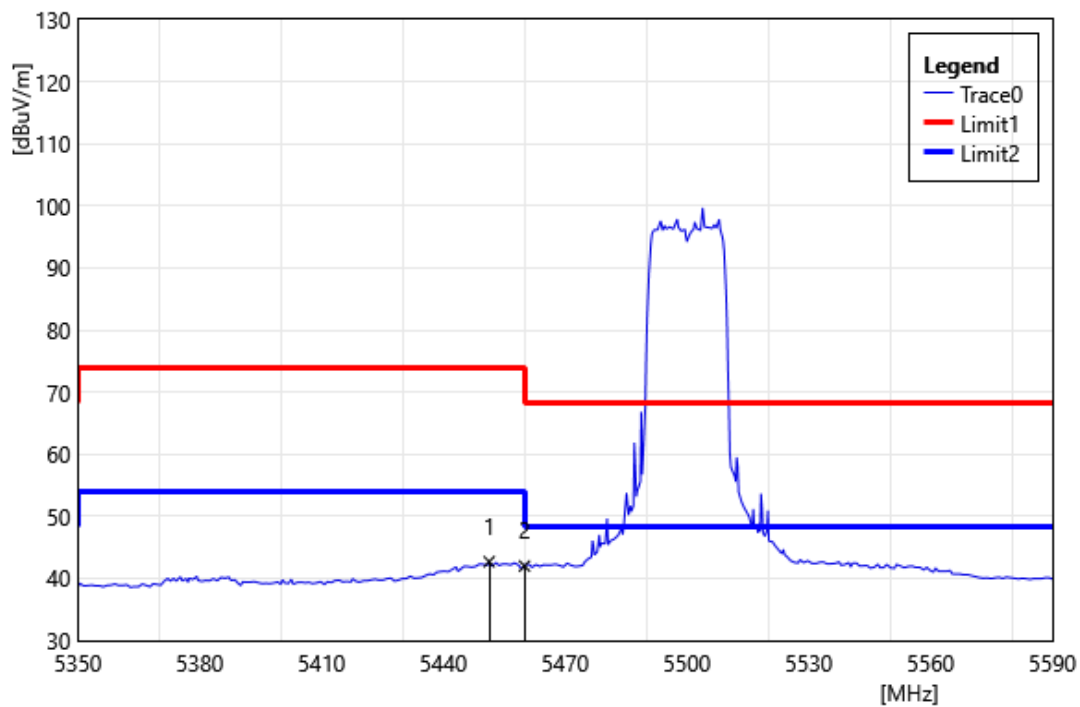


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.28	43.28	-0.58	42.70	54.00	-11.30	AVG
2	5460.00	42.57	-0.57	42.00	54.00	-12.00	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

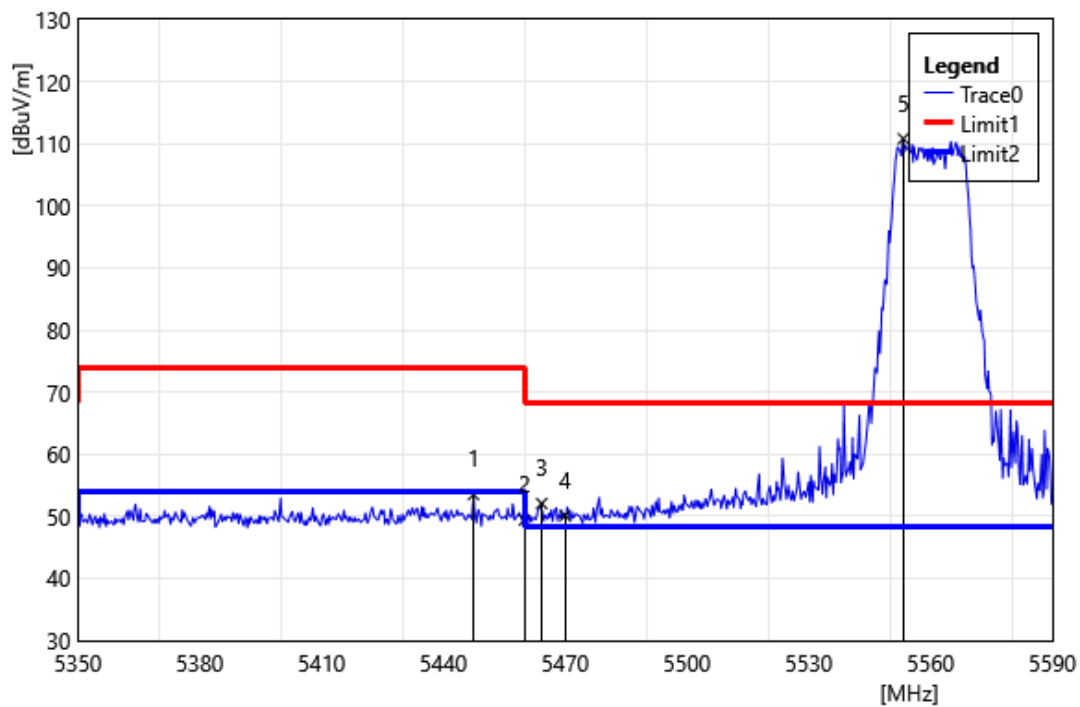


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.44	54.10	-0.60	53.50	74.00	-20.50	PEAK
2	5460.00	49.97	-0.57	49.40	74.00	-24.60	PEAK
3	5464.24	52.63	-0.57	52.06	68.20	-16.14	PEAK
4	5470.00	50.68	-0.56	50.12	68.20	-18.08	PEAK
5	5553.28	111.31	-0.50	110.81	68.20	42.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

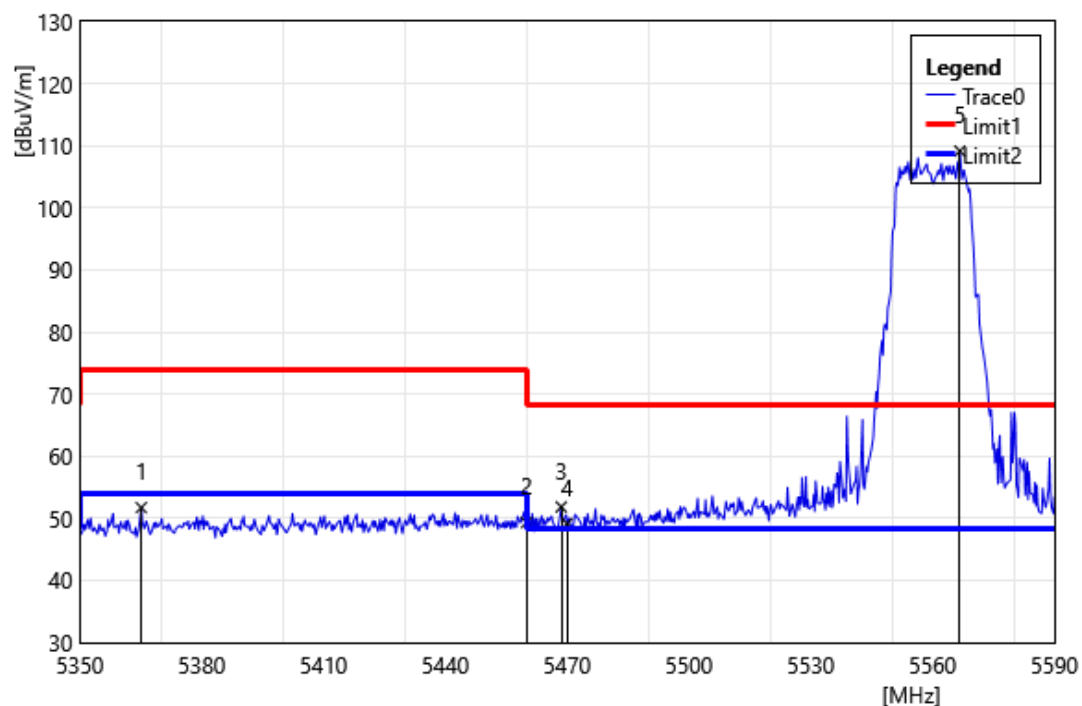


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5365.12	52.91	-1.18	51.73	74.00	-22.27	PEAK
2	5460.00	49.89	-0.57	49.32	74.00	-24.68	PEAK
3	5468.56	52.40	-0.56	51.84	68.20	-16.36	PEAK
4	5470.00	49.72	-0.56	49.16	68.20	-19.04	PEAK
5	5566.72	109.67	-0.52	109.15	68.20	40.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

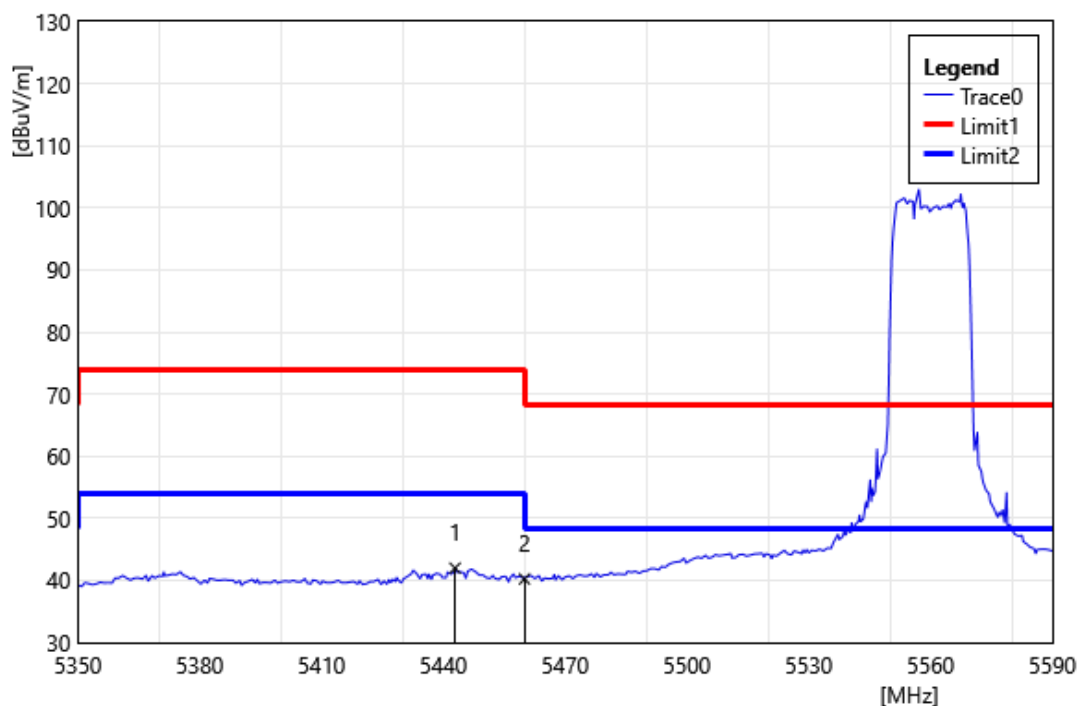


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.88	42.62	-0.63	41.99	54.00	-12.01	AVG
2	5460.00	40.82	-0.57	40.25	54.00	-13.76	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

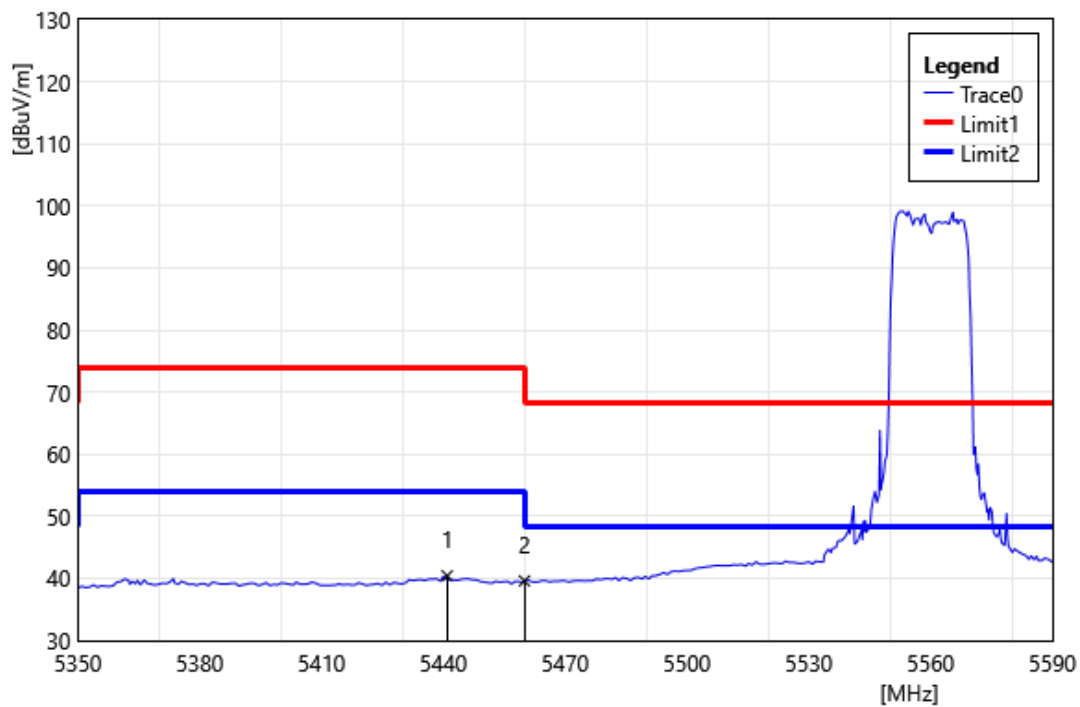


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5440.96	41.08	-0.65	40.43	54.00	-13.57	AVG
2	5460.00	40.18	-0.57	39.61	54.00	-14.39	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

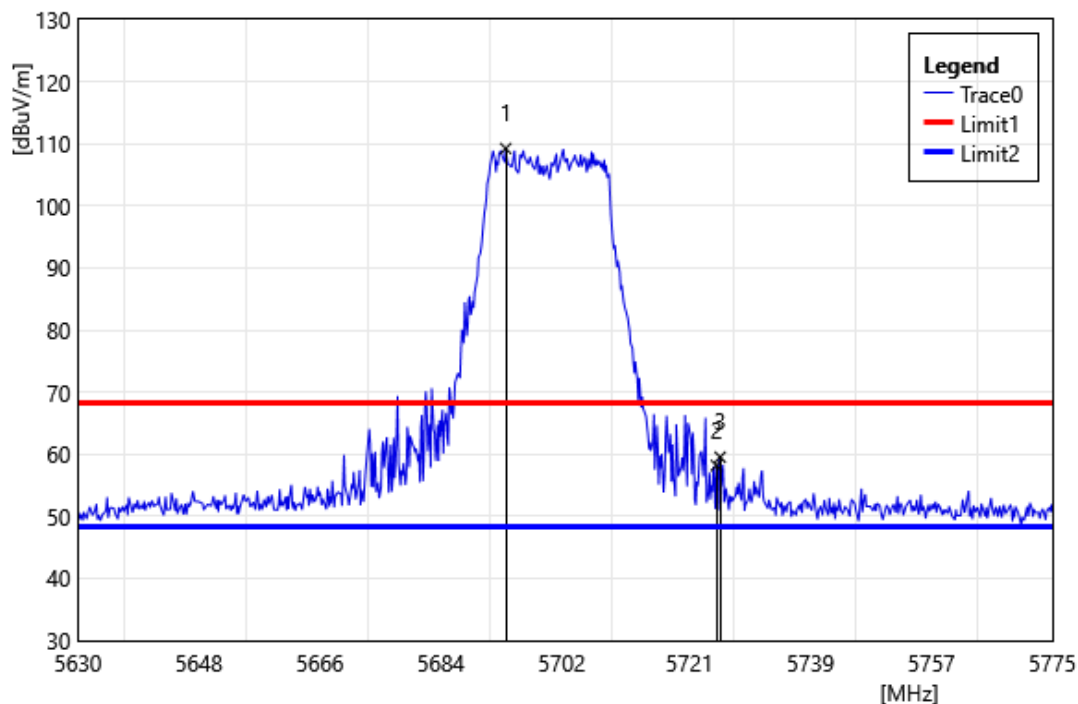


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5693.66	109.86	-0.61	109.25	68.20	41.05	PEAK
2	5725.00	58.53	-0.34	58.19	68.20	-10.01	PEAK
3	5725.56	59.88	-0.34	59.54	68.20	-8.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5700		
	MHz		
Polarization:	Horizontal		
Remark:			

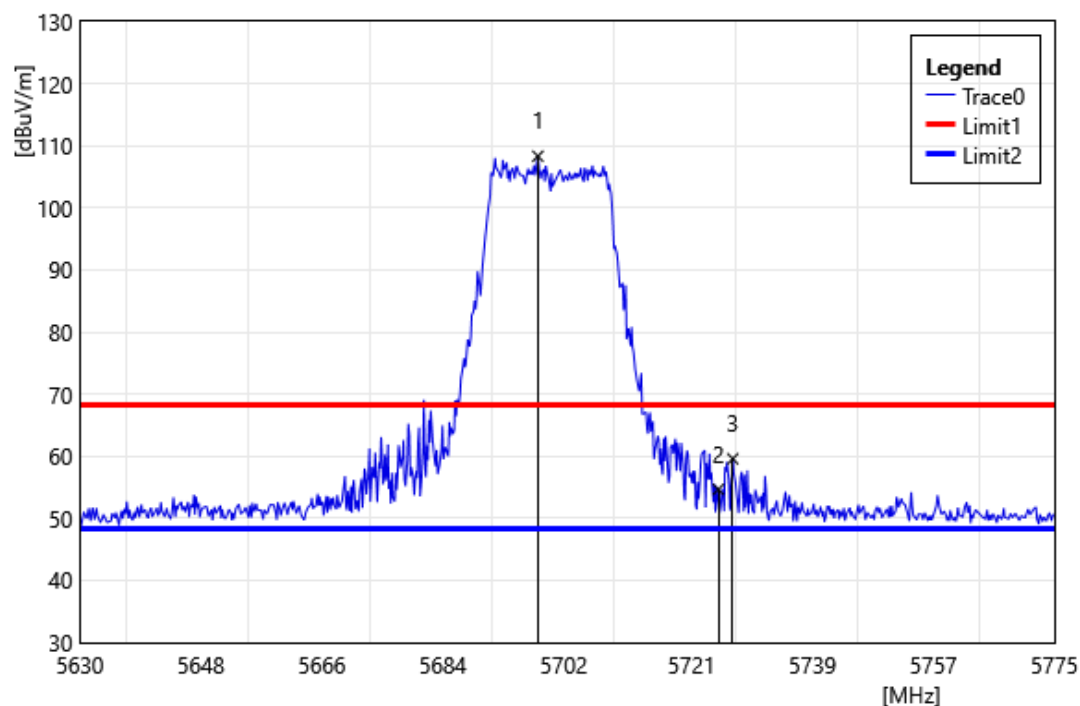


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5698.15	108.93	-0.61	108.32	68.20	40.12	PEAK
2	5725.00	55.00	-0.34	54.66	68.20	-13.54	PEAK
3	5727.15	59.92	-0.32	59.60	68.20	-8.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

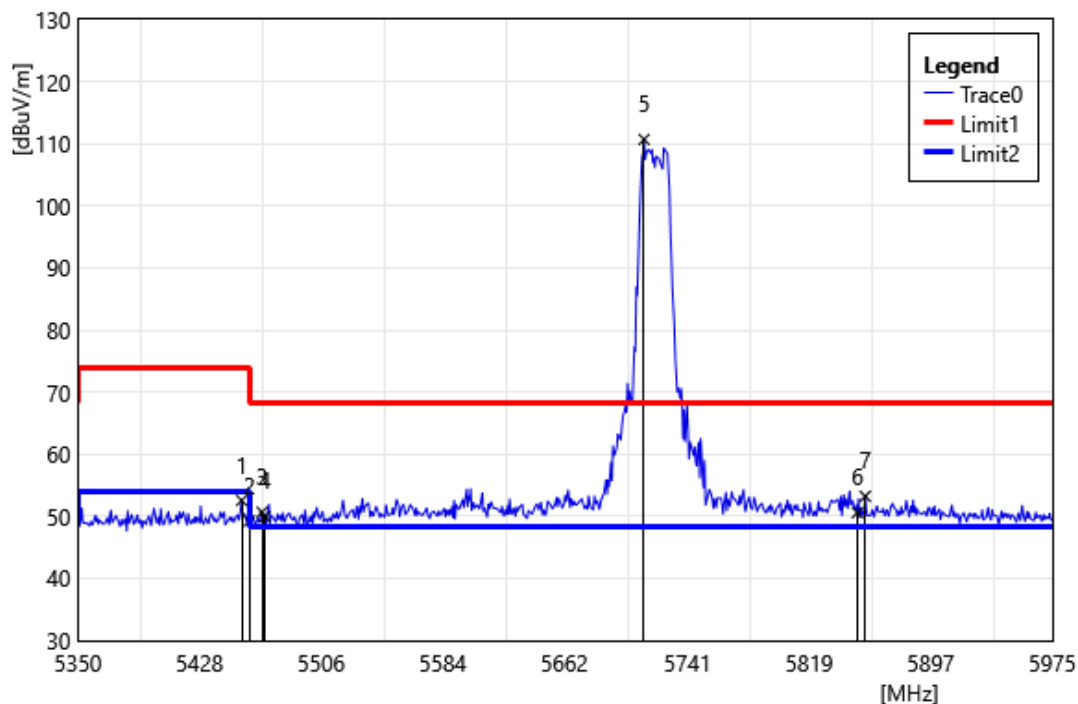


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.00	53.15	-0.58	52.57	74.00	-21.43	PEAK
2	5460.00	49.83	-0.57	49.26	74.00	-24.74	PEAK
3	5468.13	51.24	-0.56	50.68	68.20	-17.52	PEAK
4	5470.00	50.49	-0.56	49.93	68.20	-18.27	PEAK
5	5713.13	111.18	-0.47	110.71	68.20	42.51	PEAK
6	5850.00	50.33	0.28	50.61	68.20	-17.59	PEAK
7	5855.00	52.94	0.29	53.23	68.20	-14.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

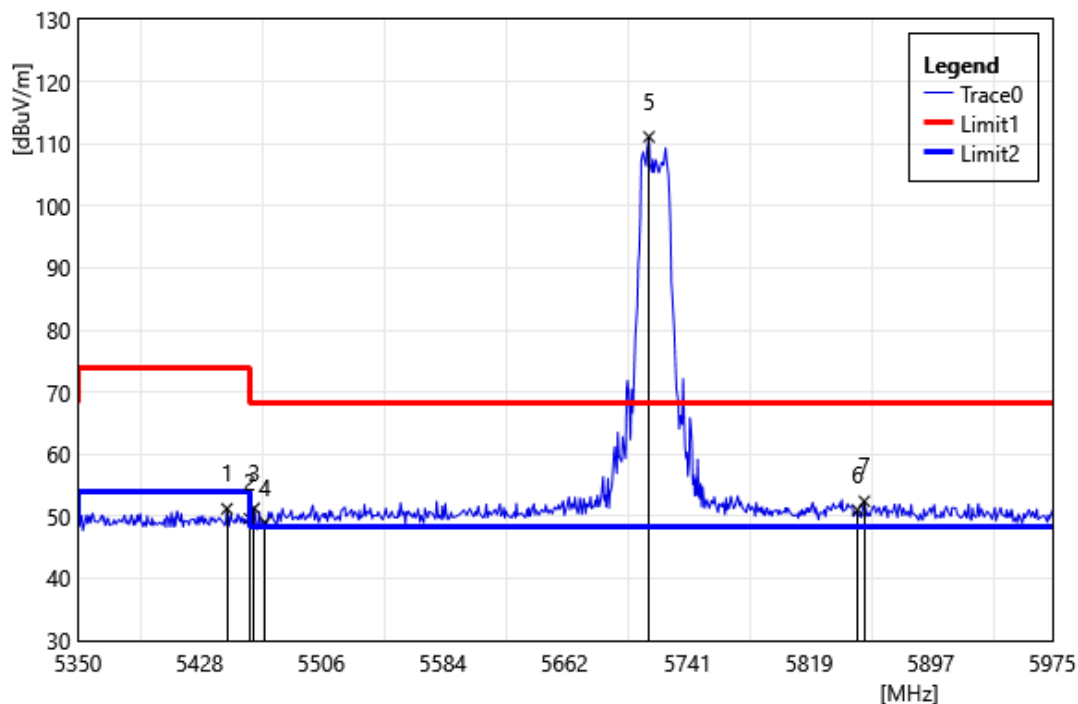


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5445.63	51.84	-0.62	51.22	74.00	-22.78	PEAK
2	5460.00	50.20	-0.57	49.63	74.00	-24.37	PEAK
3	5463.13	51.87	-0.57	51.30	68.20	-16.90	PEAK
4	5470.00	49.56	-0.56	49.00	68.20	-19.20	PEAK
5	5716.25	111.56	-0.44	111.12	68.20	42.92	PEAK
6	5850.00	50.77	0.28	51.05	68.20	-17.15	PEAK
7	5854.38	52.14	0.29	52.43	68.20	-15.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

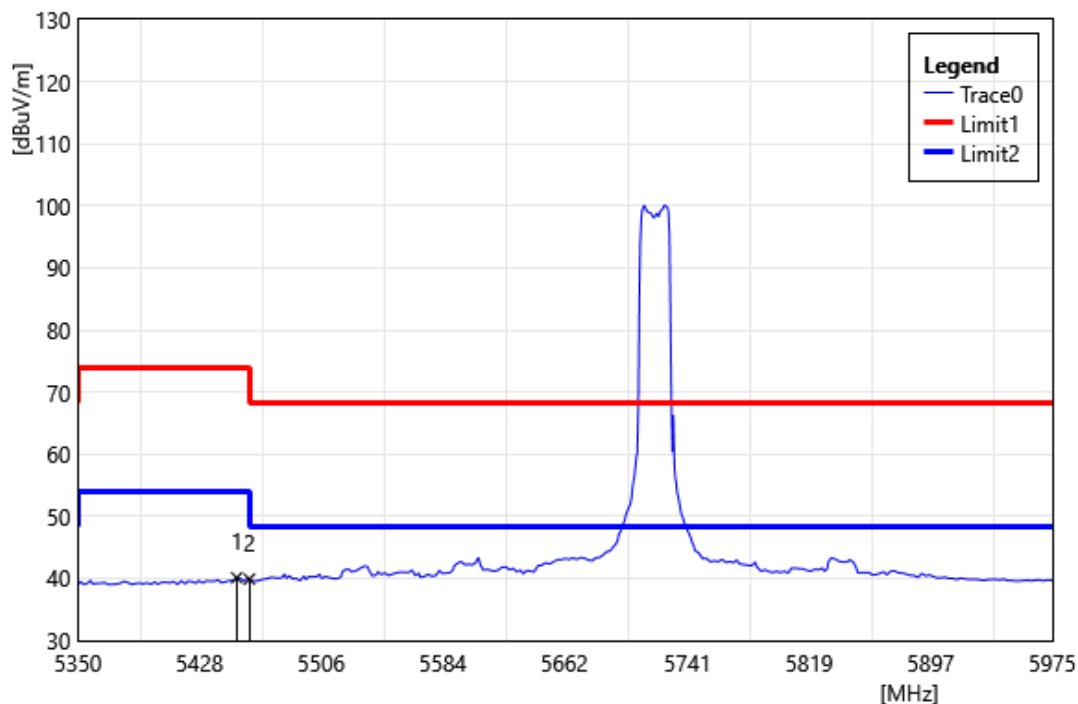


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.88	40.69	-0.58	40.11	54.00	-13.89	AVG
2	5460.00	40.46	-0.57	39.89	54.00	-14.11	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Horizontal		
Remark:			

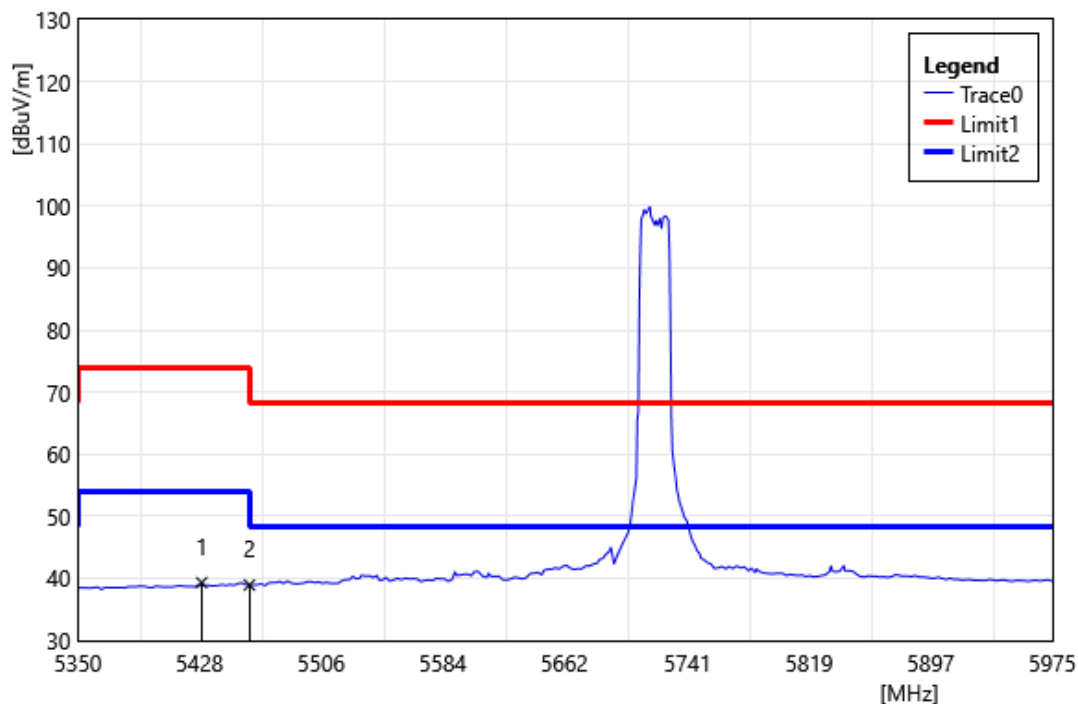


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5429.38	40.05	-0.73	39.32	54.00	-14.68	AVG
2	5460.00	39.51	-0.57	38.94	54.00	-15.06	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745 MHz		
Polarization:	Vertical		
Remark:			

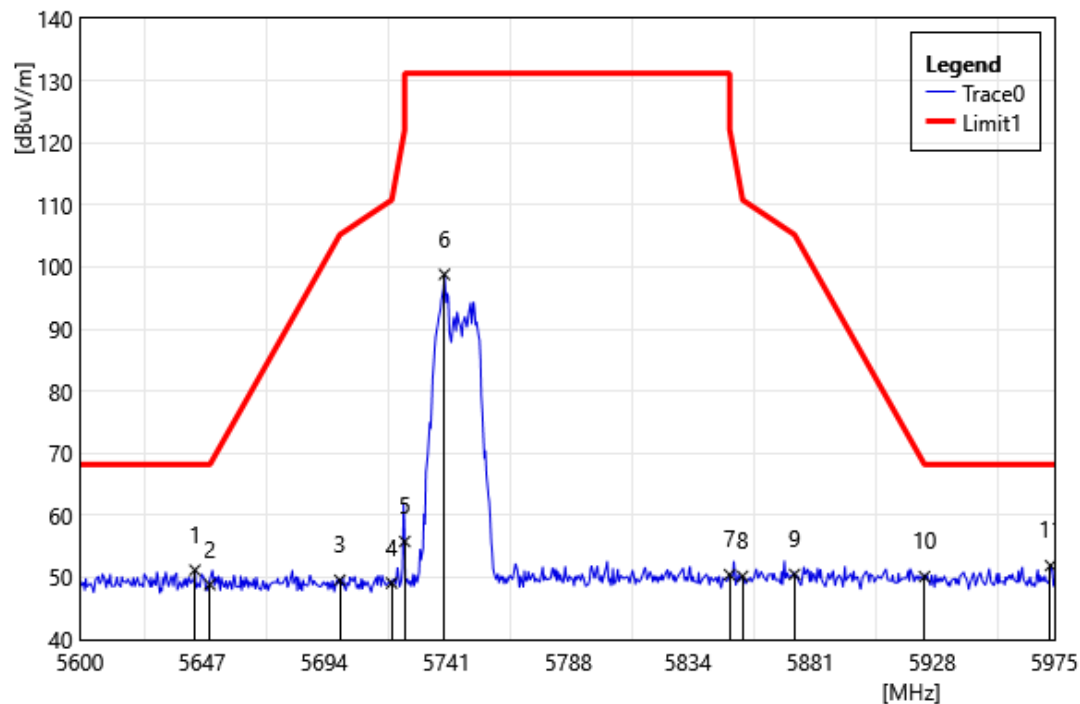


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5644.25	51.80	-0.63	51.17	68.20	-17.03	PEAK
2	5650.00	49.50	-0.64	48.86	68.20	-19.34	PEAK
3	5700.00	50.18	-0.61	49.57	105.20	-55.63	PEAK
4	5720.00	49.50	-0.40	49.10	110.80	-61.70	PEAK
5	5725.00	56.13	-0.34	55.79	131.20	-75.41	PEAK
6	5740.25	98.98	-0.18	98.80	131.20	-32.40	PEAK
7	5850.00	50.17	0.28	50.45	122.20	-71.75	PEAK
8	5855.00	49.90	0.29	50.19	110.80	-60.61	PEAK
9	5875.00	50.15	0.34	50.49	105.20	-54.71	PEAK
10	5925.00	49.85	0.28	50.13	68.20	-18.07	PEAK
11	5973.50	51.71	0.20	51.91	68.20	-16.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5745 MHz		
Polarization:	Horizontal		
Remark:			

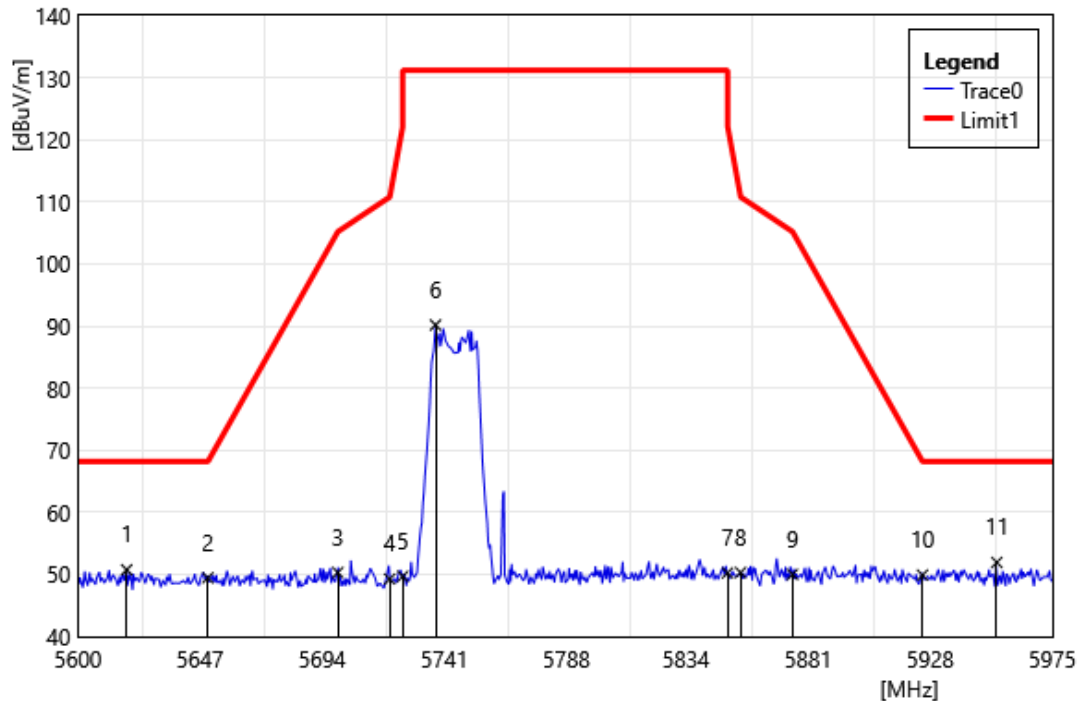


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5618.75	51.35	-0.60	50.75	68.20	-17.45	PEAK
2	5650.00	50.09	-0.64	49.45	68.20	-18.75	PEAK
3	5700.00	50.92	-0.61	50.31	105.20	-54.89	PEAK
4	5720.00	49.67	-0.40	49.27	110.80	-61.53	PEAK
5	5725.00	50.04	-0.34	49.70	131.20	-81.50	PEAK
6	5737.63	90.39	-0.21	90.18	131.20	-41.02	PEAK
7	5850.00	49.96	0.28	50.24	122.20	-71.96	PEAK
8	5855.00	50.02	0.29	50.31	110.80	-60.49	PEAK
9	5875.00	49.66	0.34	50.00	105.20	-55.20	PEAK
10	5925.00	49.63	0.28	49.91	68.20	-18.29	PEAK
11	5953.63	51.78	0.15	51.93	68.20	-16.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

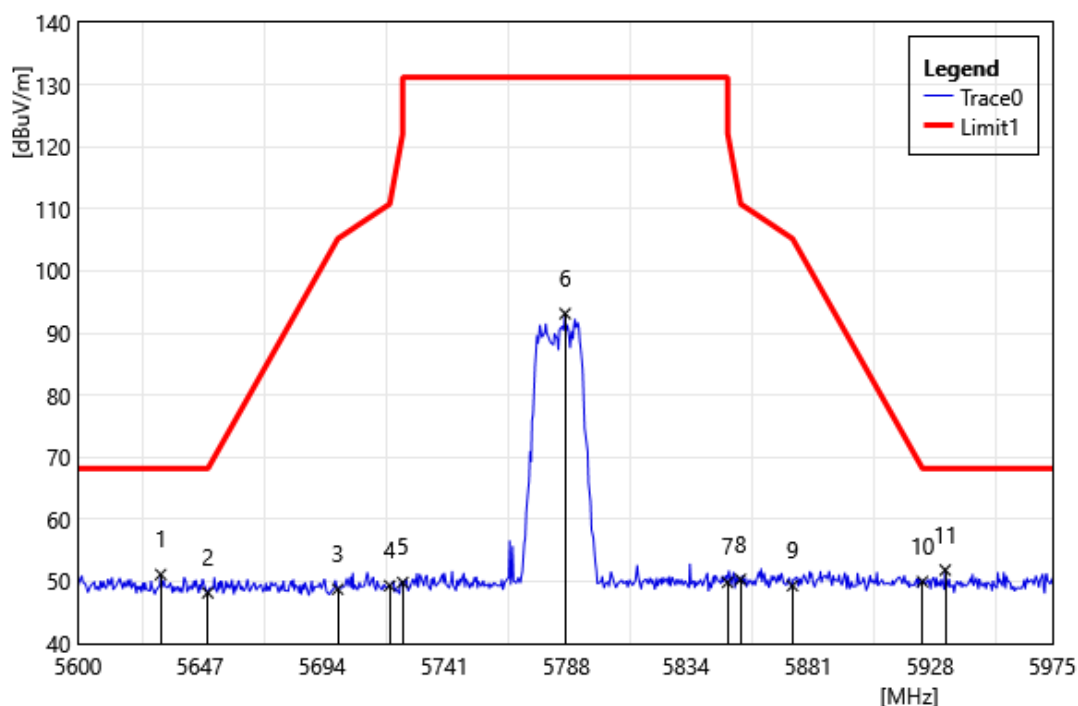


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5631.88	51.73	-0.61	51.12	68.20	-17.08	PEAK
2	5650.00	48.81	-0.64	48.17	68.20	-20.03	PEAK
3	5700.00	49.36	-0.61	48.75	105.20	-56.45	PEAK
4	5720.00	49.71	-0.40	49.31	110.80	-61.49	PEAK
5	5725.00	50.18	-0.34	49.84	131.20	-81.36	PEAK
6	5787.50	93.04	0.09	93.13	131.20	-38.07	PEAK
7	5850.00	49.57	0.28	49.85	122.20	-72.35	PEAK
8	5855.00	50.03	0.29	50.32	110.80	-60.48	PEAK
9	5875.00	48.97	0.34	49.31	105.20	-55.89	PEAK
10	5925.00	49.70	0.28	49.98	68.20	-18.22	PEAK
11	5933.75	51.60	0.23	51.83	68.20	-16.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

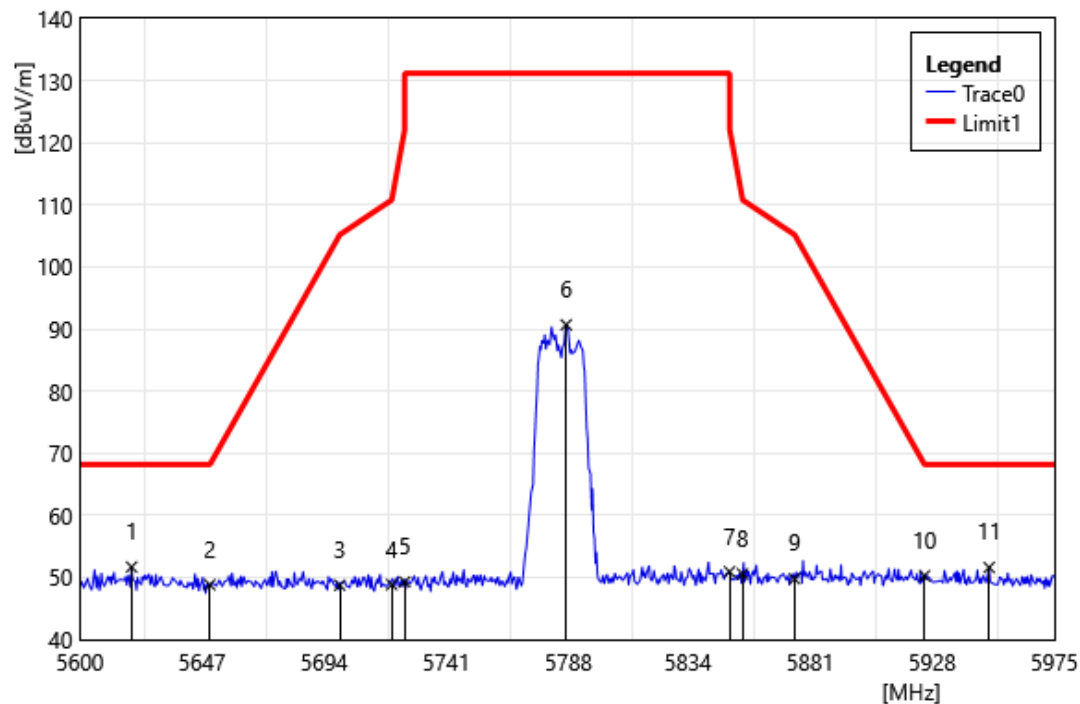


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5619.88	52.28	-0.60	51.68	68.20	-16.52	PEAK
2	5650.00	49.47	-0.64	48.83	68.20	-19.37	PEAK
3	5700.00	49.36	-0.61	48.75	105.20	-56.45	PEAK
4	5720.00	49.25	-0.40	48.85	110.80	-61.95	PEAK
5	5725.00	49.61	-0.34	49.27	131.20	-81.93	PEAK
6	5787.13	90.60	0.09	90.69	131.20	-40.51	PEAK
7	5850.00	50.64	0.28	50.92	122.20	-71.28	PEAK
8	5855.00	50.29	0.29	50.58	110.80	-60.22	PEAK
9	5875.00	49.46	0.34	49.80	105.20	-55.40	PEAK
10	5925.00	49.98	0.28	50.26	68.20	-17.94	PEAK
11	5949.88	51.47	0.14	51.61	68.20	-16.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825 MHz		
Polarization:	Vertical		
Remark:			

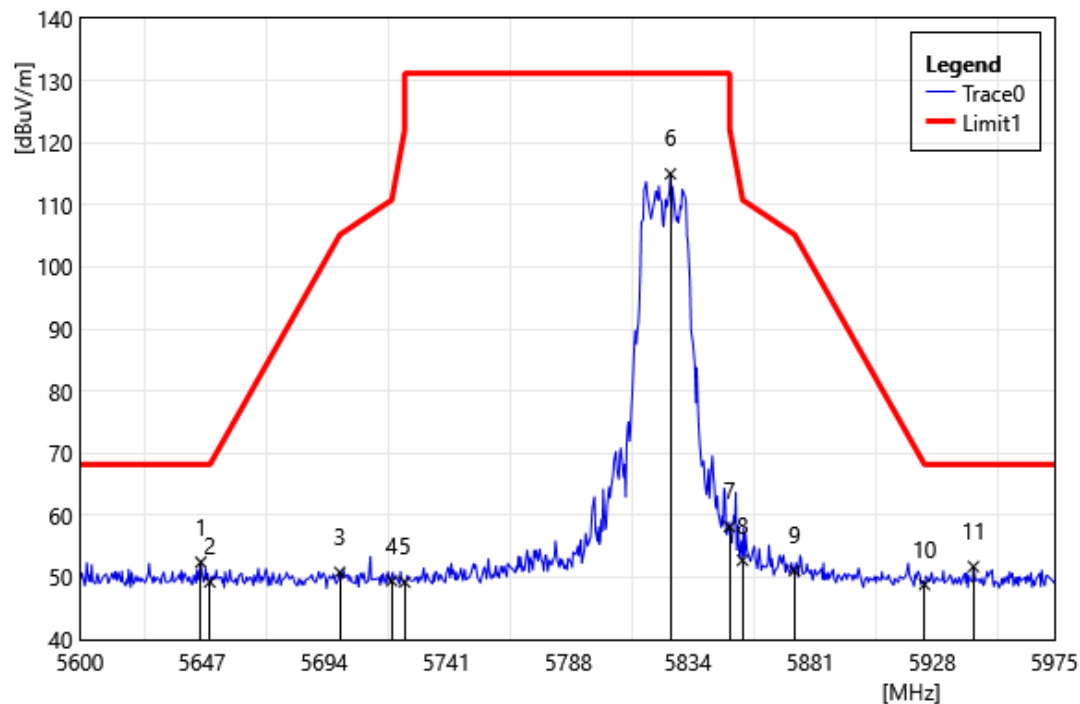


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5646.50	53.09	-0.64	52.45	68.20	-15.75	PEAK
2	5650.00	49.89	-0.64	49.25	68.20	-18.95	PEAK
3	5700.00	51.44	-0.61	50.83	105.20	-54.37	PEAK
4	5720.00	49.86	-0.40	49.46	110.80	-61.34	PEAK
5	5725.00	49.59	-0.34	49.25	131.20	-81.95	PEAK
6	5827.25	114.78	0.22	115.00	131.20	-16.20	PEAK
7	5850.00	57.87	0.28	58.15	122.20	-64.05	PEAK
8	5855.00	52.46	0.29	52.75	110.80	-58.05	PEAK
9	5875.00	50.74	0.34	51.08	105.20	-54.12	PEAK
10	5925.00	48.58	0.28	48.86	68.20	-19.34	PEAK
11	5943.88	51.57	0.17	51.74	68.20	-16.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT20 5825 MHz		
Polarization:	Horizontal		
Remark:			

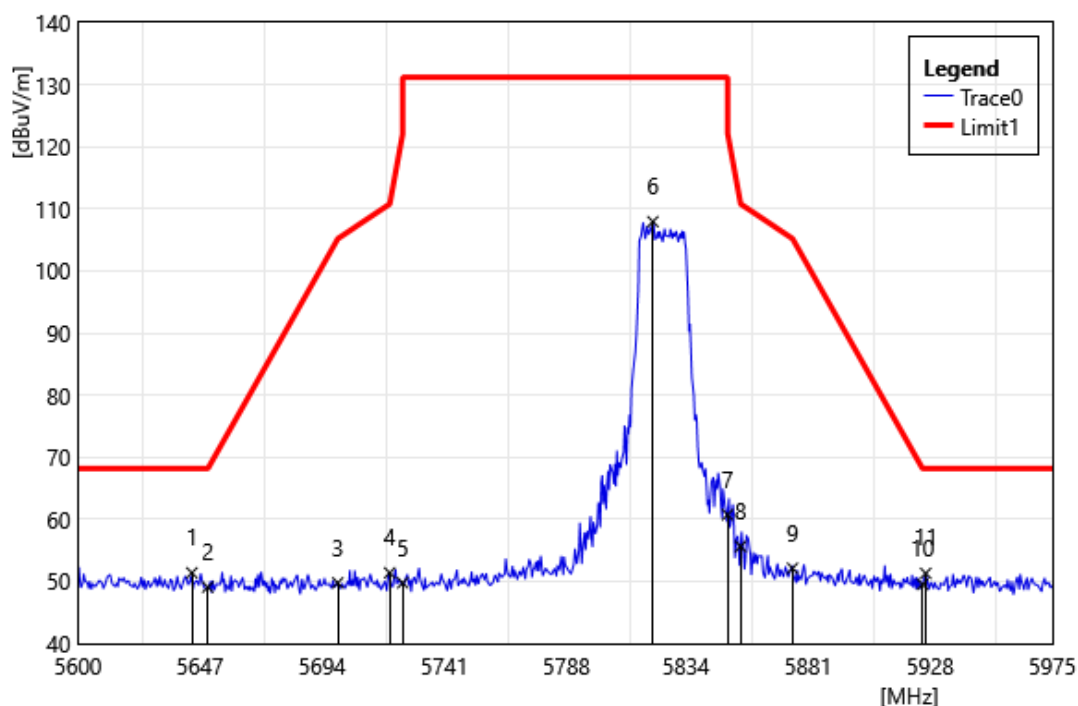


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5643.88	52.02	-0.63	51.39	68.20	-16.81	PEAK
2	5650.00	49.73	-0.64	49.09	68.20	-19.11	PEAK
3	5700.00	50.39	-0.61	49.78	105.20	-55.42	PEAK
4	5720.00	51.79	-0.40	51.39	110.80	-59.41	PEAK
5	5725.00	50.12	-0.34	49.78	131.20	-81.43	PEAK
6	5821.25	107.73	0.21	107.94	131.20	-23.26	PEAK
7	5850.00	60.46	0.28	60.74	122.20	-61.46	PEAK
8	5855.00	55.36	0.29	55.65	110.80	-55.15	PEAK
9	5875.00	51.78	0.34	52.12	105.20	-53.08	PEAK
10	5925.00	49.24	0.28	49.52	68.20	-18.68	PEAK
11	5926.25	51.03	0.27	51.30	68.20	-16.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

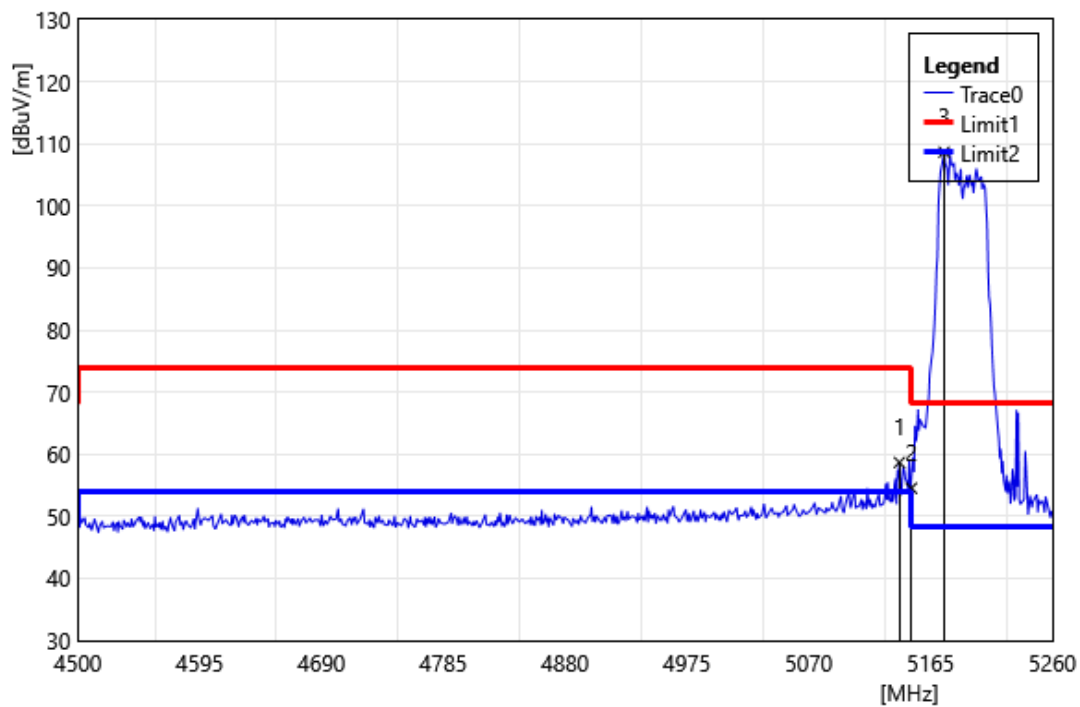


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.68	59.58	-0.90	58.68	74.00	-15.32	PEAK
2	5150.00	55.44	-0.91	54.53	74.00	-19.47	PEAK
3	5175.64	109.69	-1.03	108.66	68.20	40.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

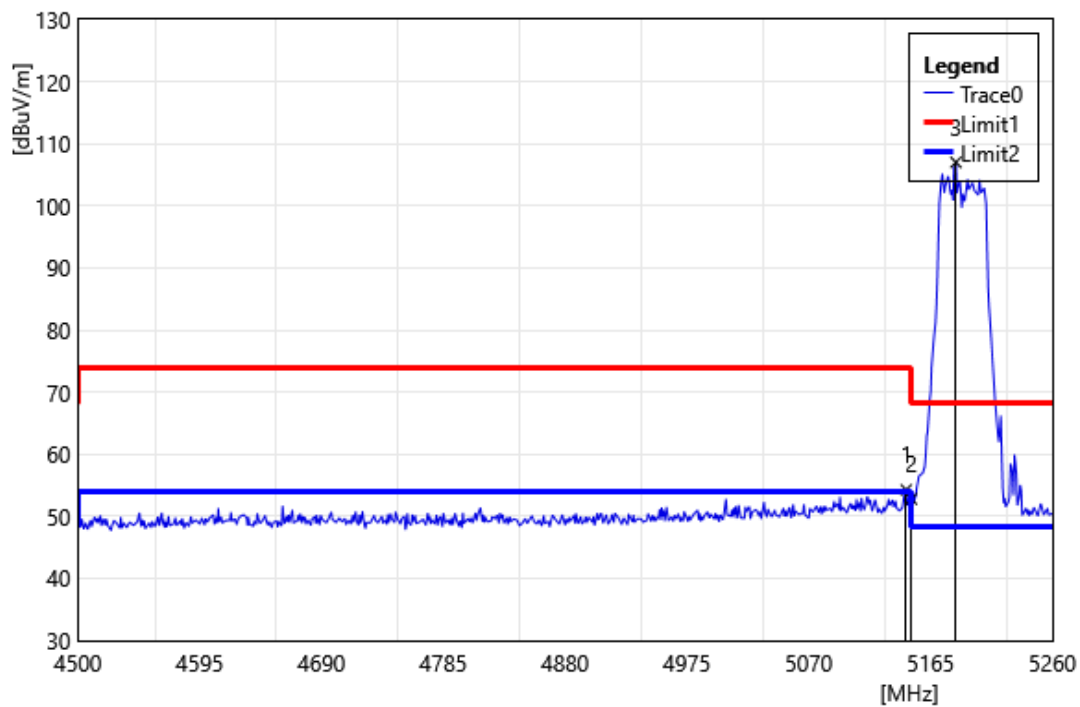


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	55.17	-0.90	54.27	74.00	-19.73	PEAK
2	5150.00	53.70	-0.91	52.80	74.00	-21.20	PEAK
3	5184.76	108.10	-1.08	107.02	68.20	38.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

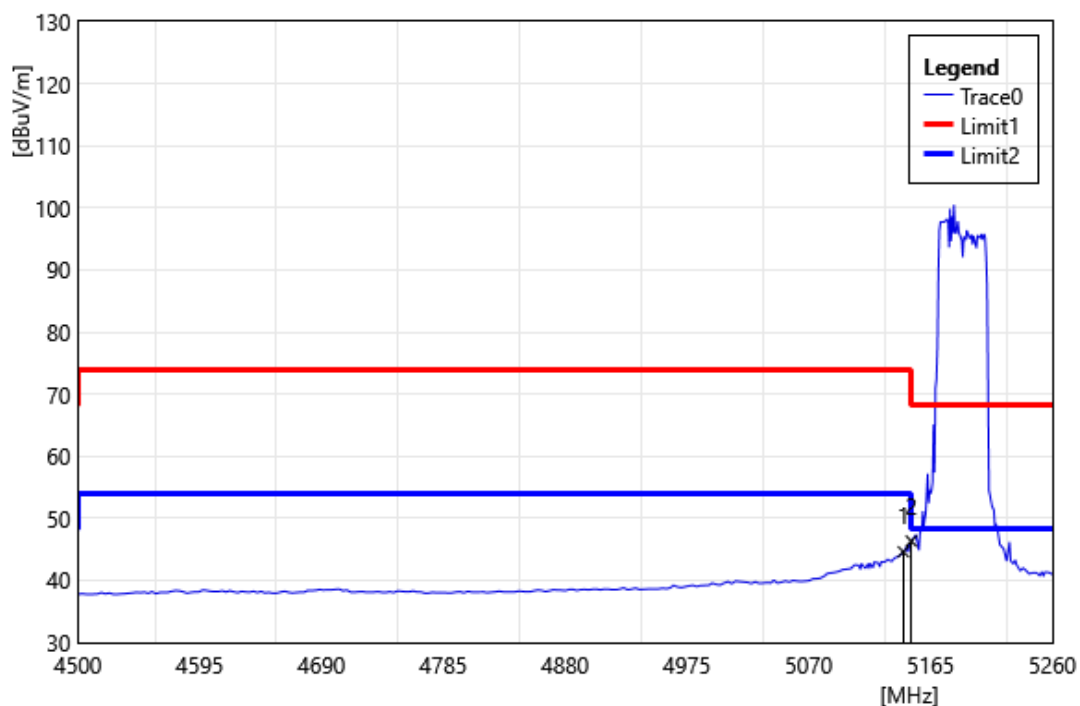


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	45.51	-0.90	44.61	54.00	-9.39	AVG
2	5150.00	47.24	-0.91	46.33	54.00	-7.67	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

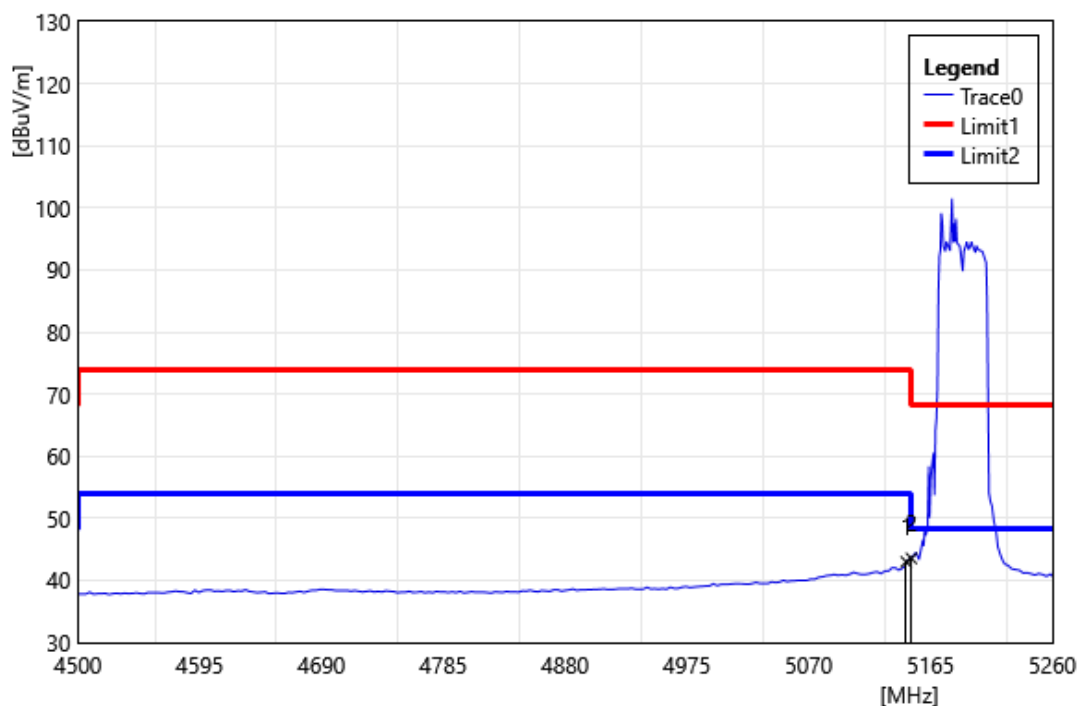


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	43.90	-0.90	43.00	54.00	-11.00	AVG
2	5150.00	44.46	-0.91	43.55	54.00	-10.45	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

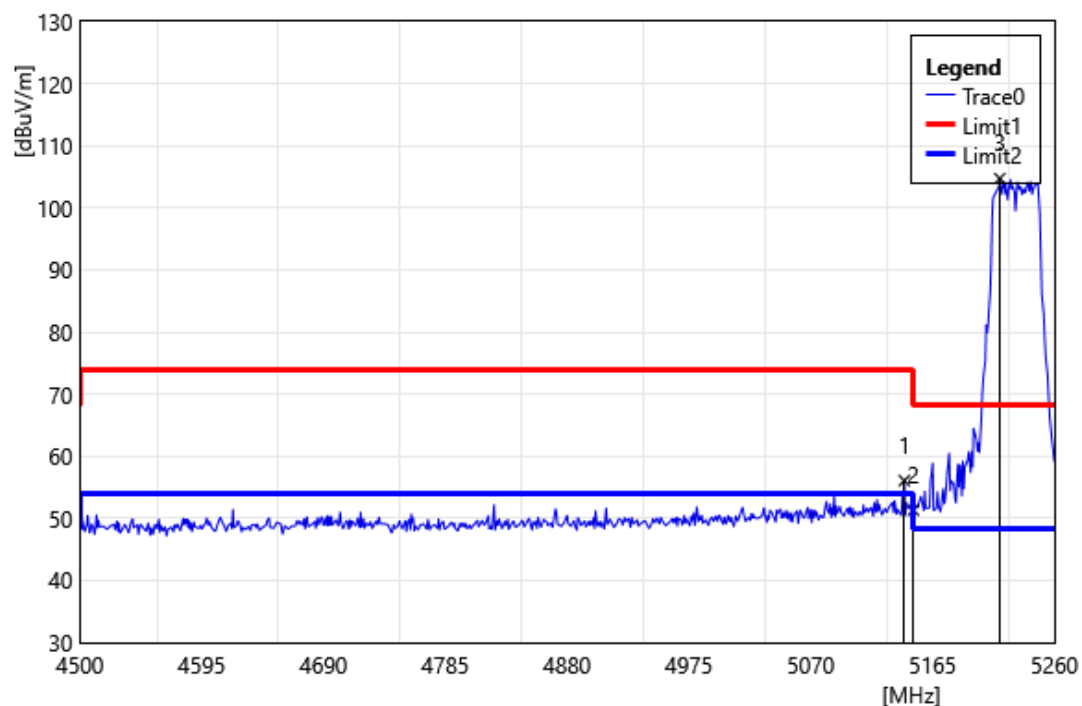


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	56.98	-0.90	56.08	74.00	-17.92	PEAK
2	5150.00	52.24	-0.91	51.33	74.00	-22.67	PEAK
3	5217.44	106.01	-1.27	104.74	68.20	36.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

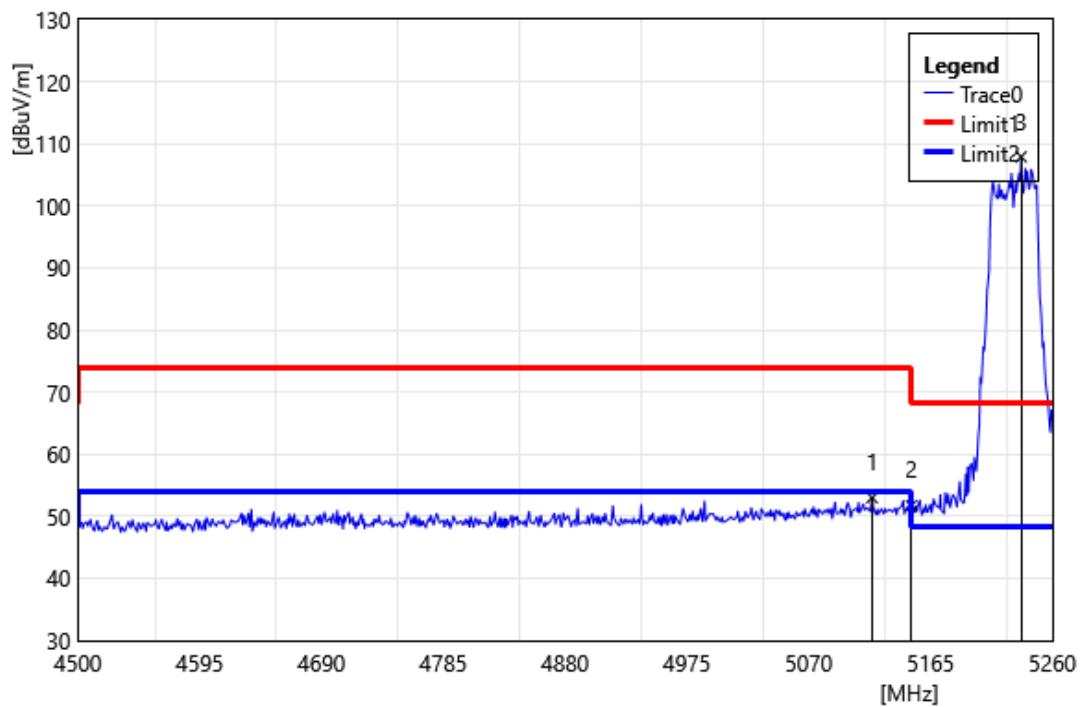


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5119.40	53.88	-0.88	53.00	74.00	-21.00	PEAK
2	5150.00	52.62	-0.91	51.71	74.00	-22.29	PEAK
3	5235.68	109.30	-1.40	107.90	68.20	39.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

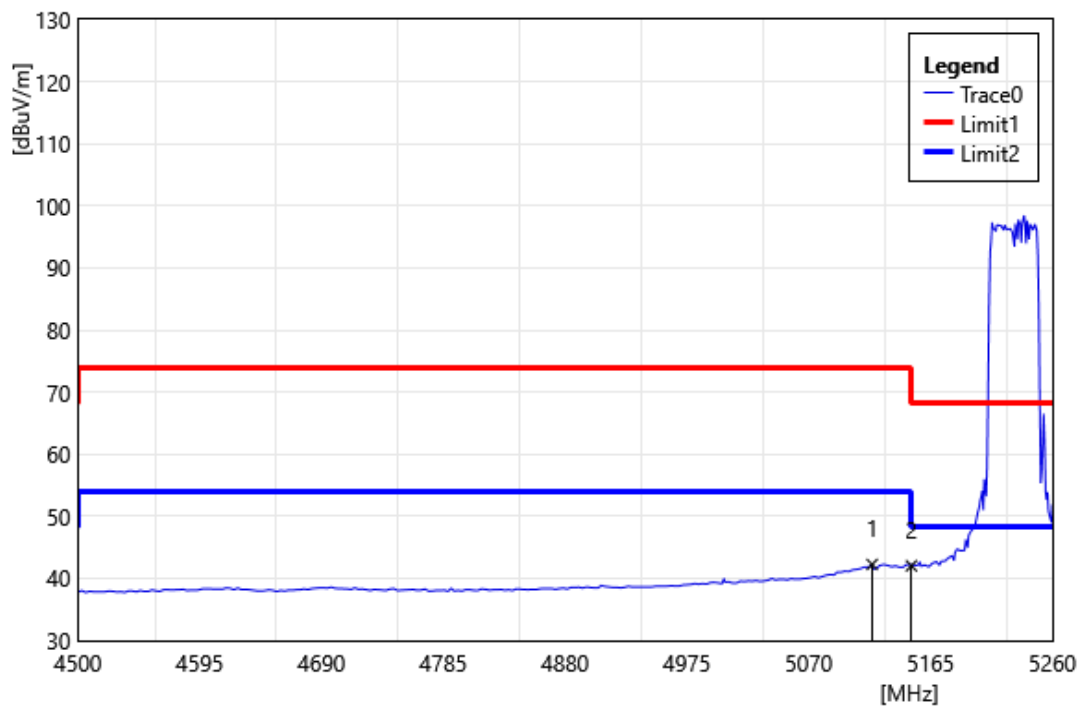


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5119.40	43.13	-0.88	42.25	54.00	-11.75	AVG
2	5150.00	42.95	-0.91	42.04	54.00	-11.96	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

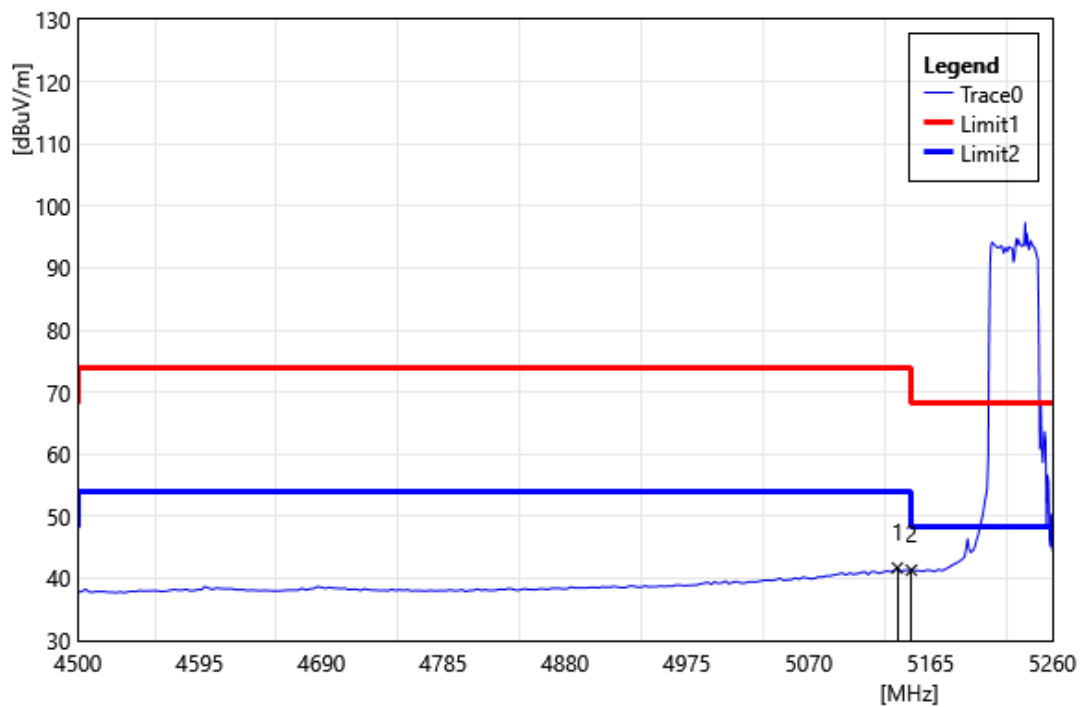


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.16	42.60	-0.90	41.70	54.00	-12.30	AVG
2	5150.00	42.23	-0.91	41.32	54.00	-12.68	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

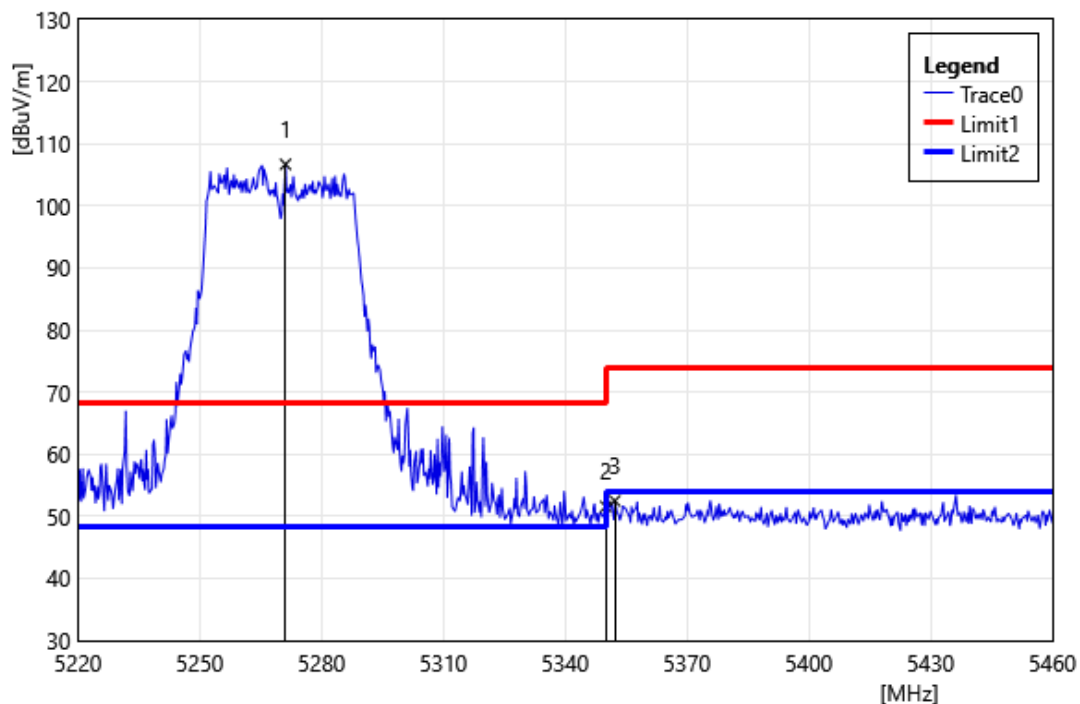


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5271.12	108.25	-1.56	106.69	68.20	38.49	PEAK
2	5350.00	52.88	-1.29	51.59	74.00	-22.41	PEAK
3	5352.24	53.78	-1.28	52.50	74.00	-21.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

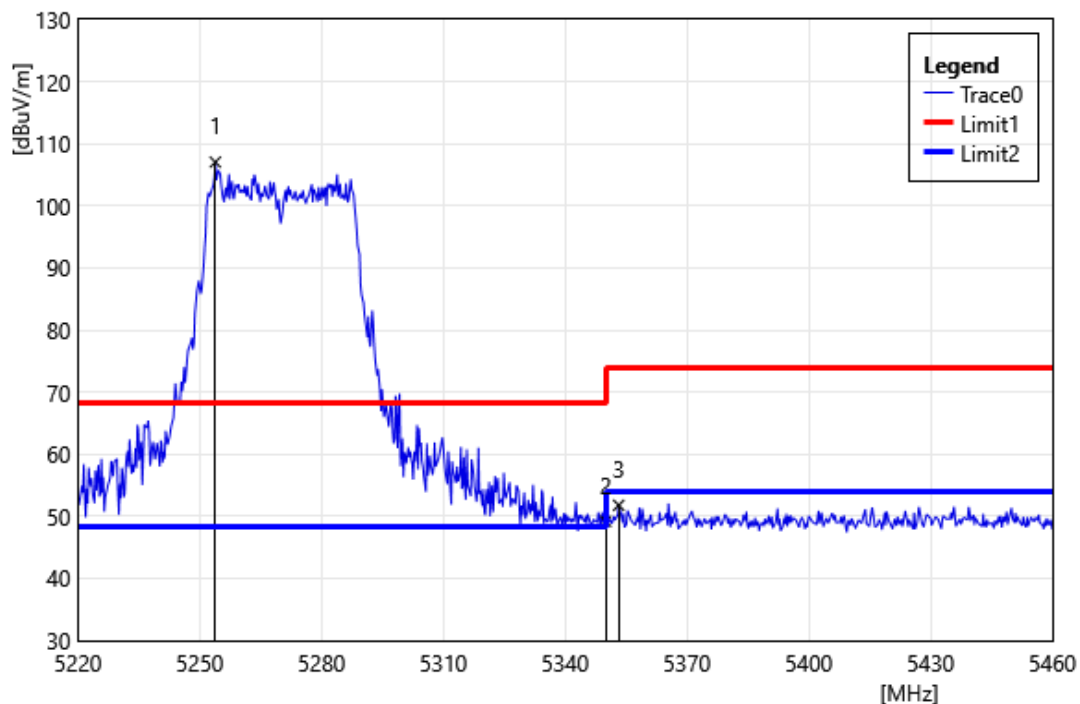


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5253.84	108.57	-1.51	107.06	68.20	38.86	PEAK
2	5350.00	50.48	-1.29	49.18	74.00	-24.82	PEAK
3	5353.20	53.05	-1.27	51.78	74.00	-22.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

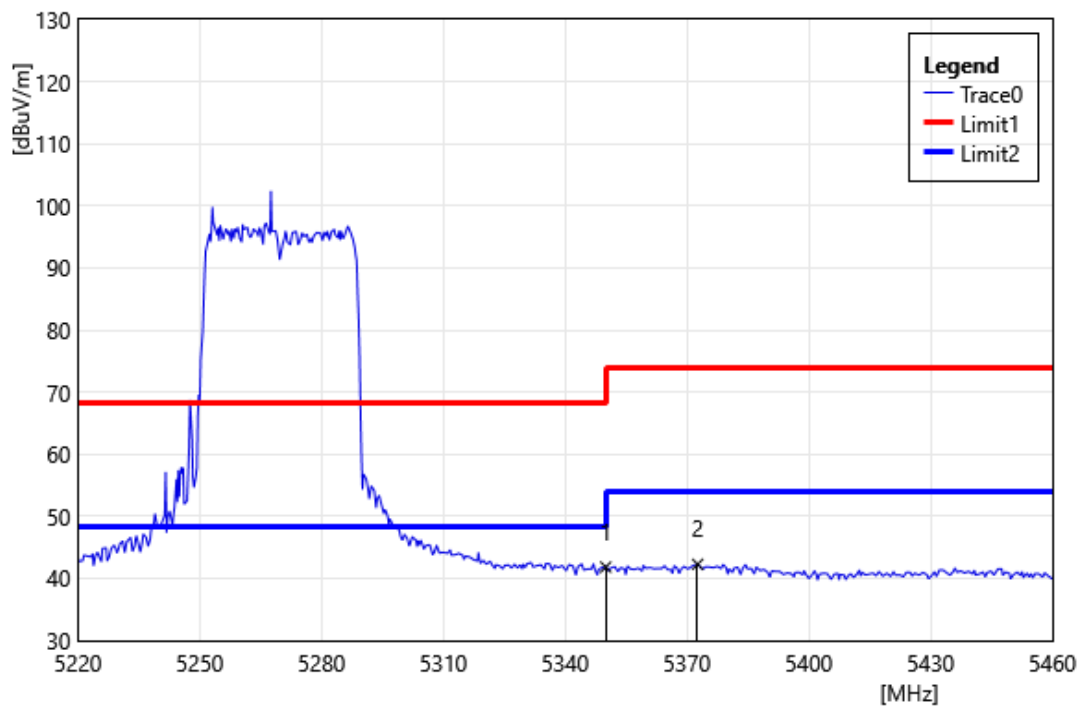


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	43.12	-1.29	41.82	54.00	-12.18	AVG
2	5372.64	43.41	-1.13	42.28	54.00	-11.72	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

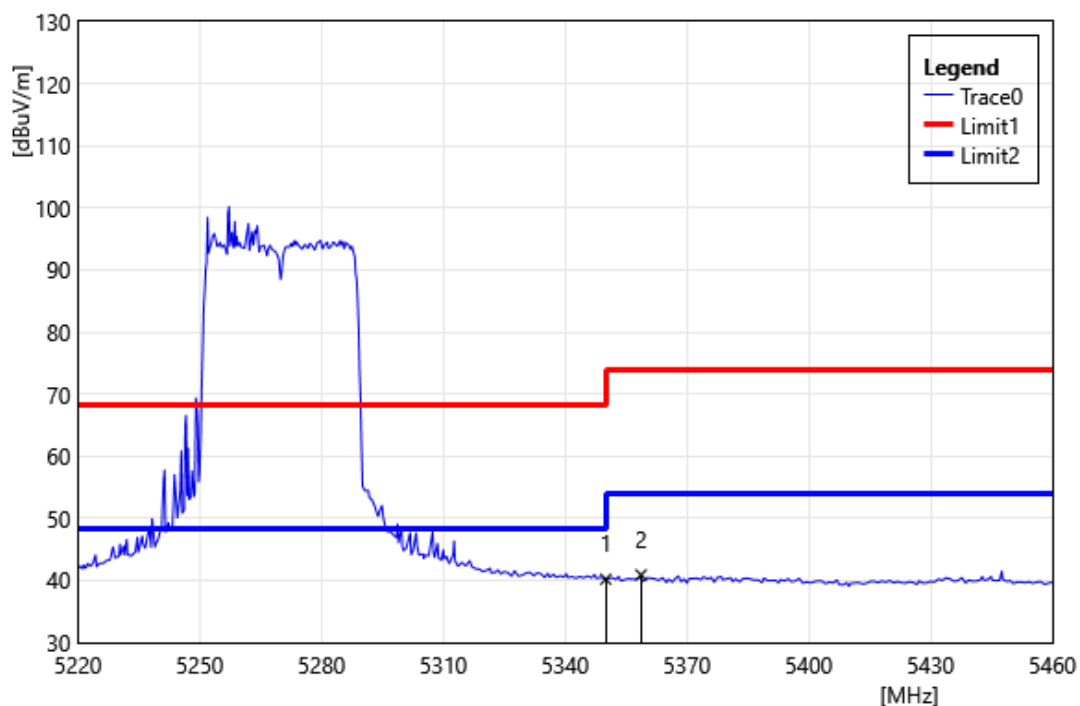


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.49	-1.29	40.20	54.00	-13.80	AVG
2	5358.72	42.11	-1.23	40.88	54.00	-13.12	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

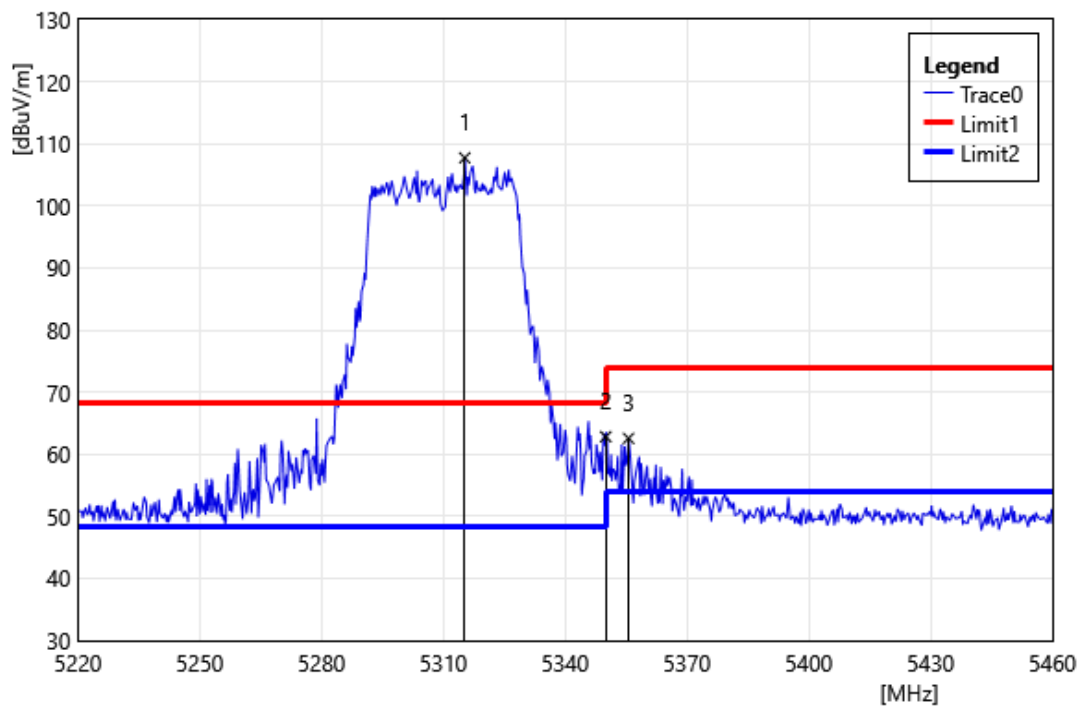


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5315.28	109.29	-1.54	107.75	68.20	39.55	PEAK
2	5350.00	64.12	-1.29	62.83	74.00	-11.17	PEAK
3	5355.60	63.81	-1.25	62.56	74.00	-11.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

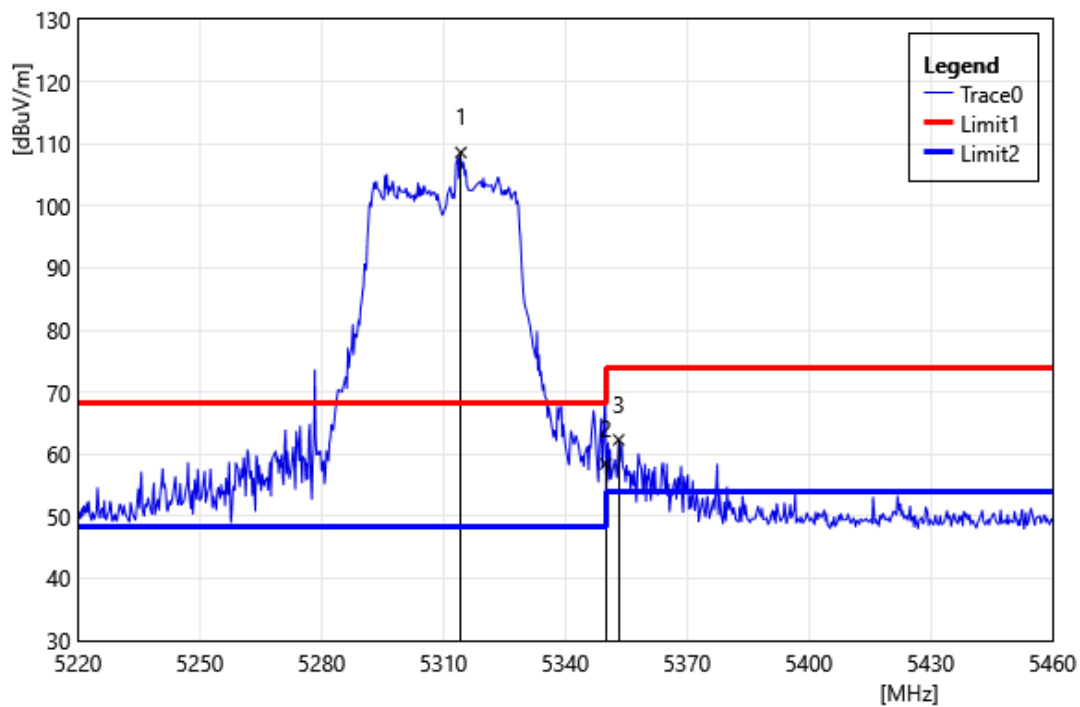


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5314.32	110.12	-1.54	108.58	68.20	40.38	PEAK
2	5350.00	59.73	-1.29	58.44	74.00	-15.56	PEAK
3	5353.20	63.60	-1.27	62.33	74.00	-11.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

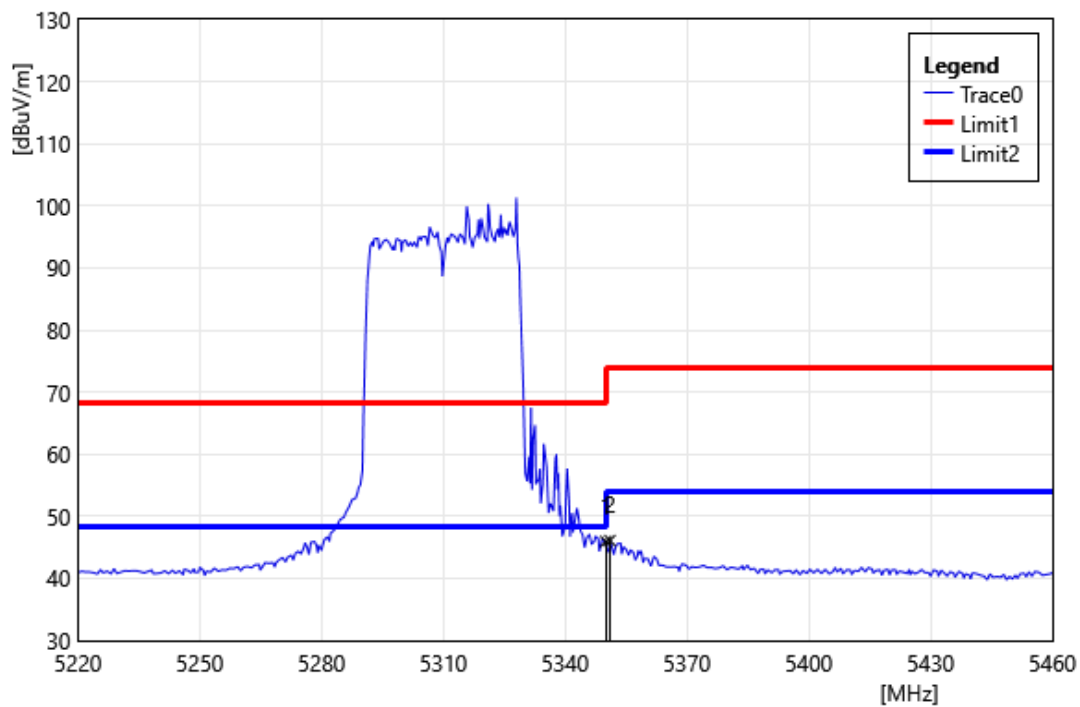


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	47.24	-1.29	45.95	54.00	-8.05	AVG
2	5351.04	47.38	-1.28	46.10	54.00	-7.90	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

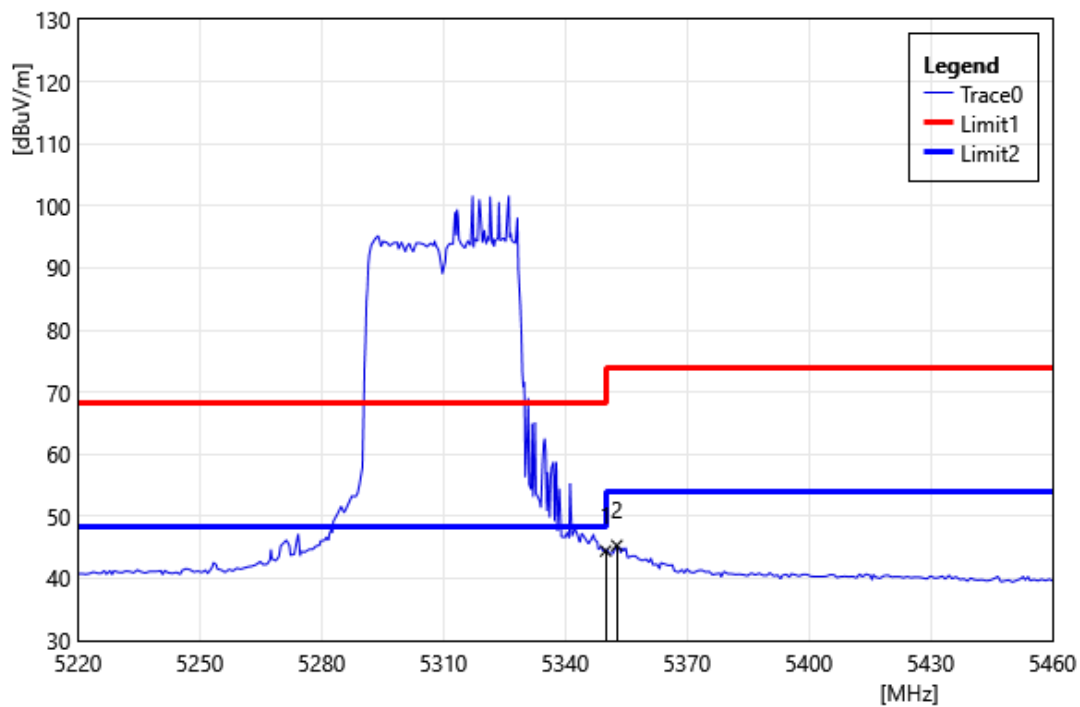


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	45.72	-1.29	44.43	54.00	-9.57	AVG
2	5352.72	46.57	-1.27	45.30	54.00	-8.70	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

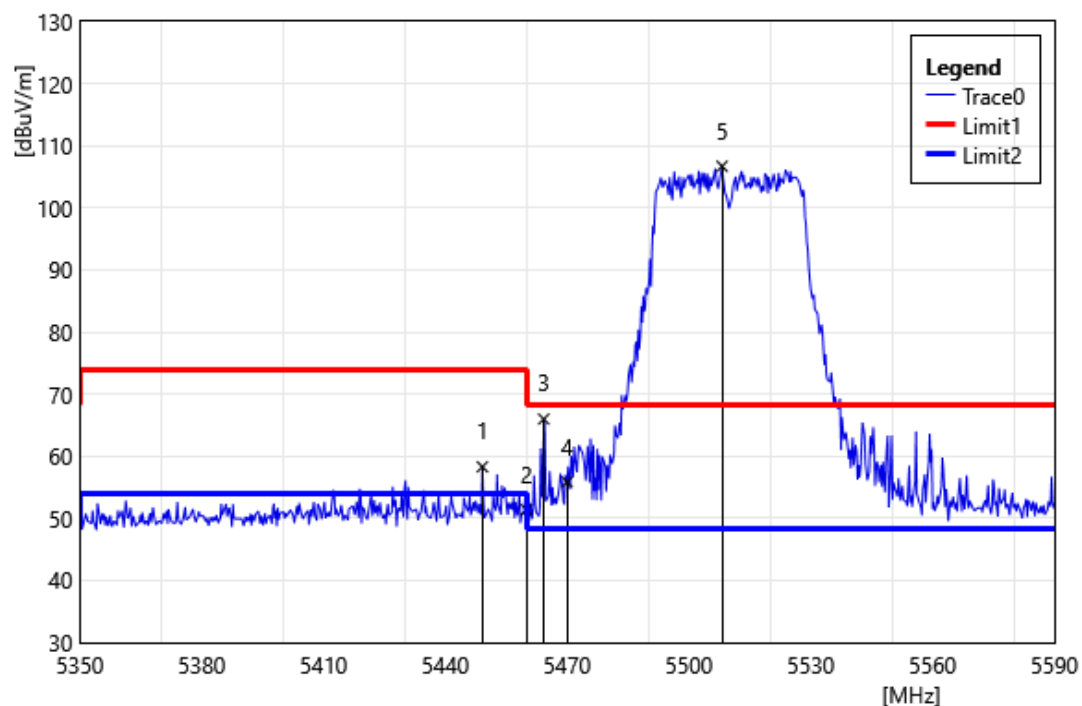


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5449.12	58.88	-0.59	58.29	74.00	-15.71	PEAK
2	5460.00	51.94	-0.57	51.37	74.00	-22.63	PEAK
3	5464.24	66.56	-0.57	65.99	68.20	-2.21	PEAK
4	5470.00	56.42	-0.56	55.86	68.20	-12.34	PEAK
5	5508.16	107.24	-0.53	106.71	68.20	38.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

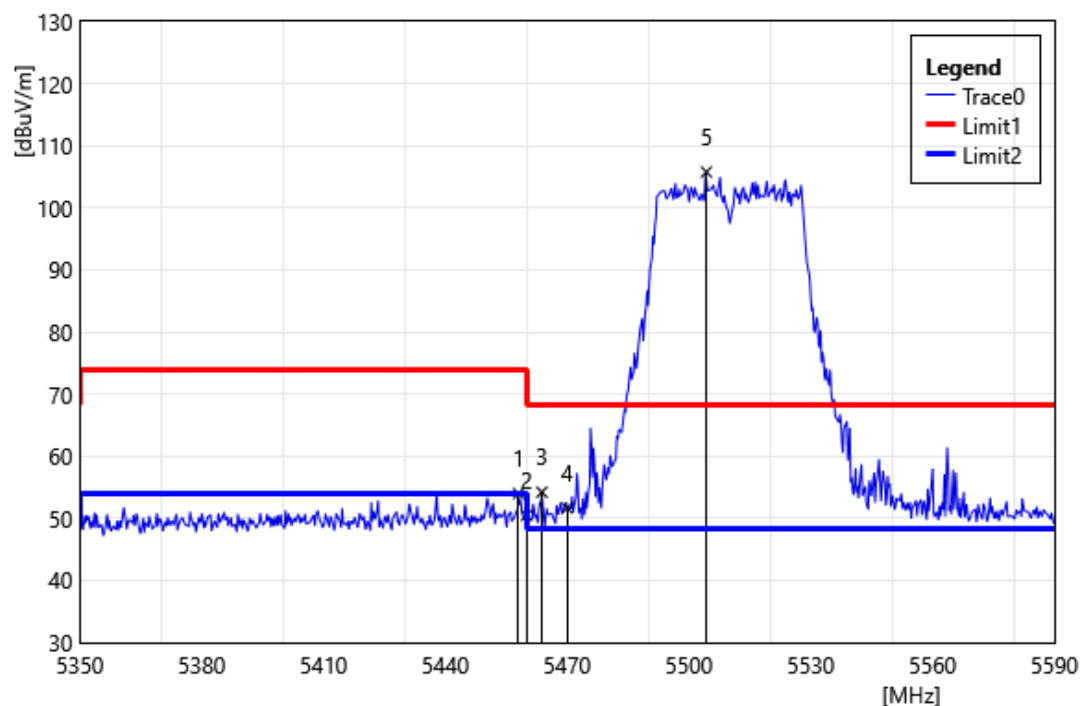


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	54.58	-0.58	54.00	74.00	-20.00	PEAK
2	5460.00	51.03	-0.57	50.46	74.00	-23.54	PEAK
3	5463.76	54.79	-0.57	54.22	68.20	-13.98	PEAK
4	5470.00	52.22	-0.56	51.66	68.20	-16.54	PEAK
5	5504.32	106.30	-0.53	105.77	68.20	37.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

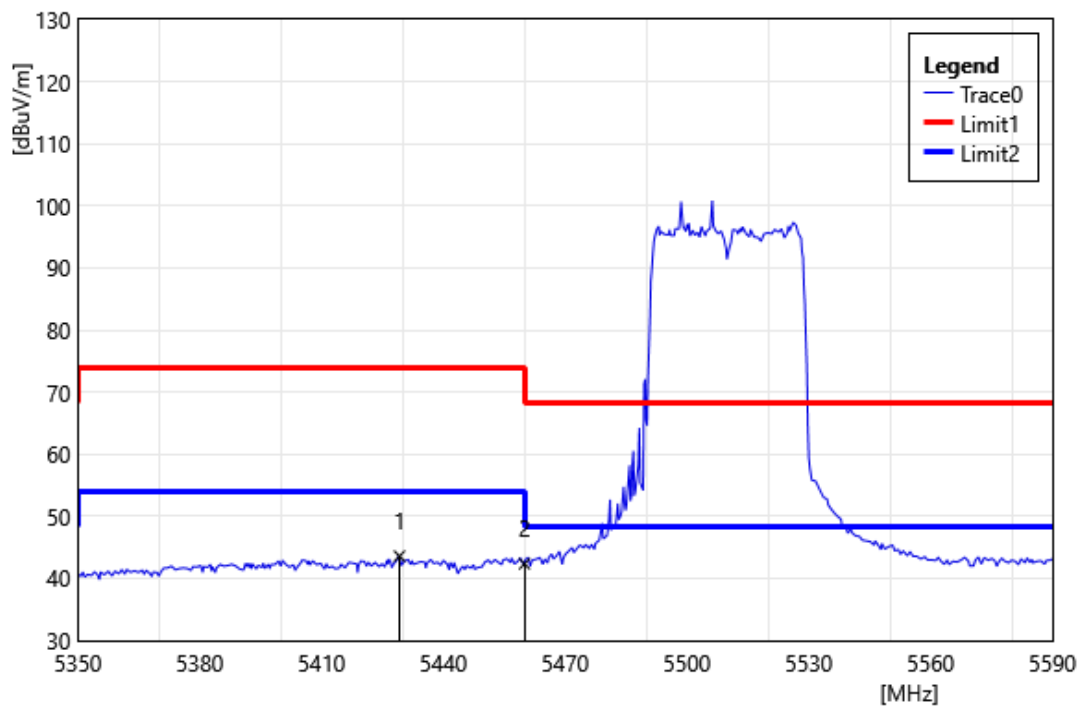


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5429.20	44.32	-0.73	43.59	54.00	-10.41	AVG
2	5460.00	42.94	-0.57	42.37	54.00	-11.63	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

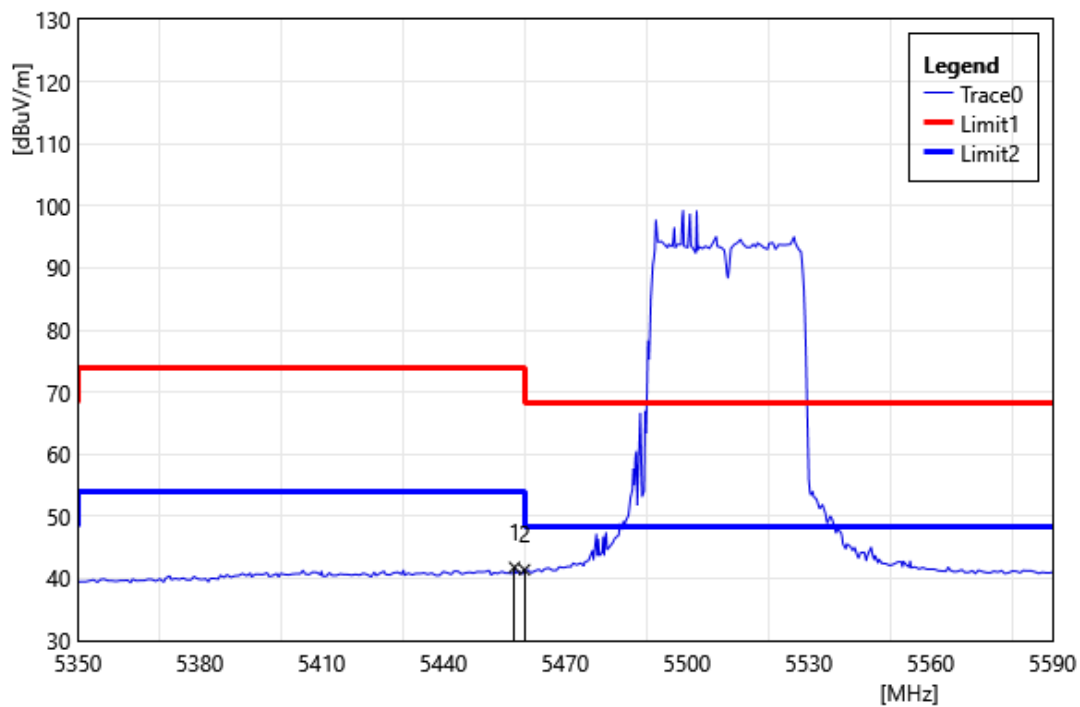


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.52	42.34	-0.58	41.76	54.00	-12.24	AVG
2	5460.00	41.96	-0.57	41.39	54.00	-12.61	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

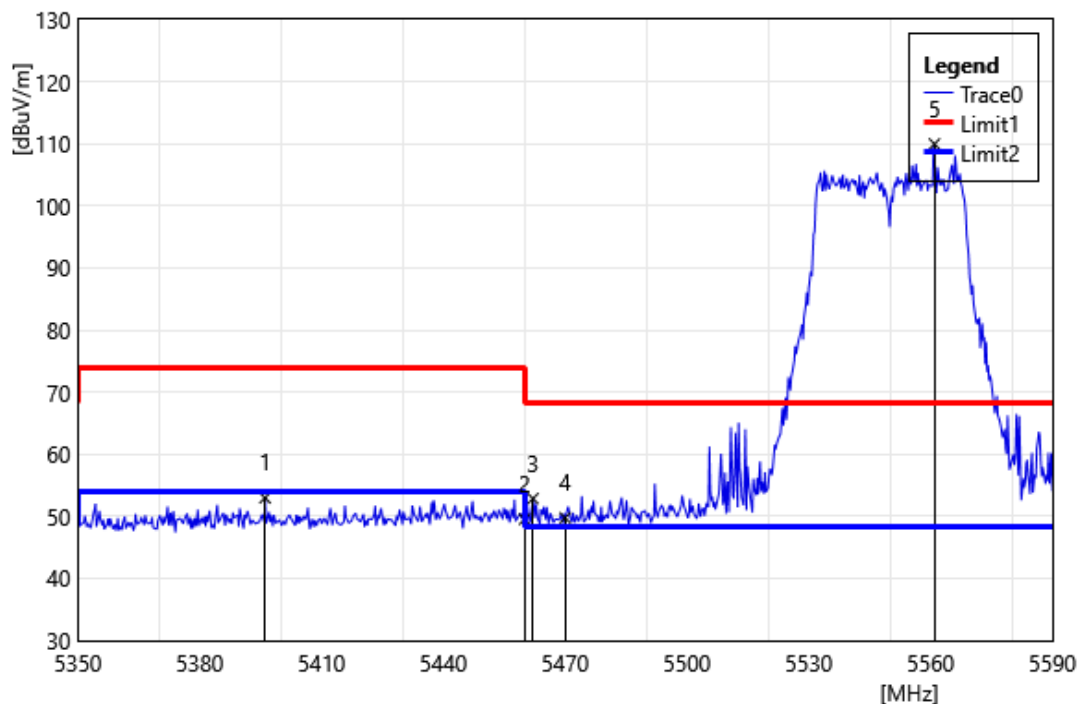


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5396.08	53.95	-0.97	52.98	74.00	-21.02	PEAK
2	5460.00	50.11	-0.57	49.54	74.00	-24.46	PEAK
3	5462.08	53.44	-0.57	52.87	68.20	-15.33	PEAK
4	5470.00	50.32	-0.56	49.76	68.20	-18.44	PEAK
5	5560.96	110.49	-0.52	109.97	68.20	41.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

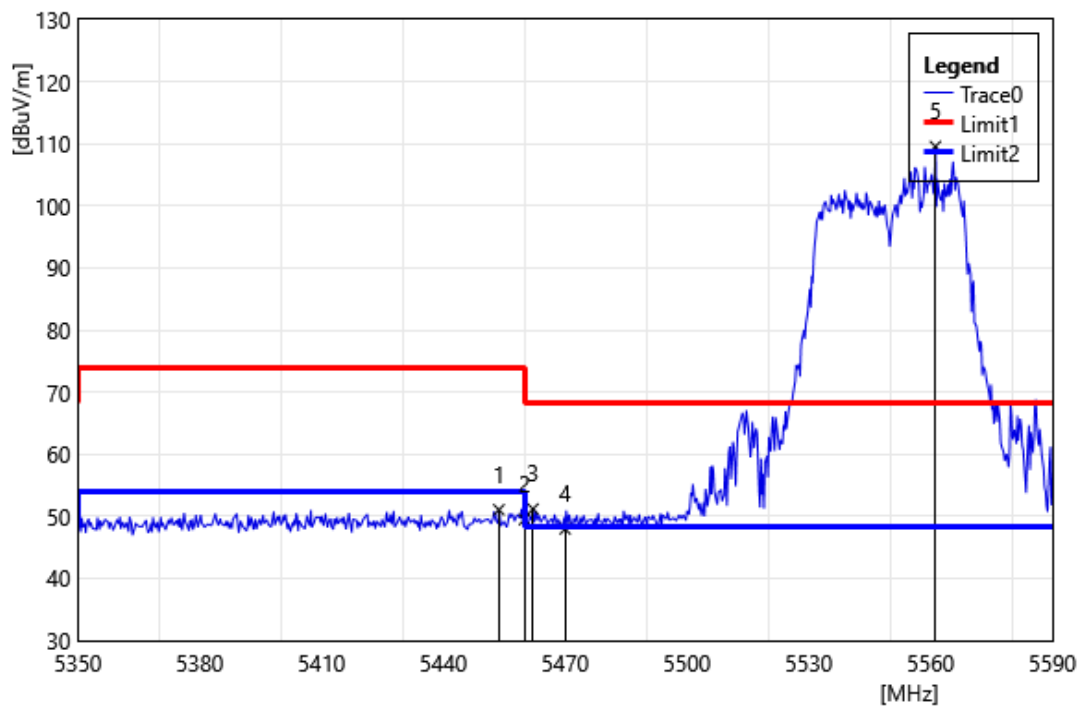


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.68	51.65	-0.58	51.07	74.00	-22.93	PEAK
2	5460.00	50.05	-0.57	49.48	74.00	-24.52	PEAK
3	5462.08	51.76	-0.57	51.19	68.20	-17.01	PEAK
4	5470.00	48.53	-0.56	47.97	68.20	-20.23	PEAK
5	5561.20	110.09	-0.52	109.57	68.20	41.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

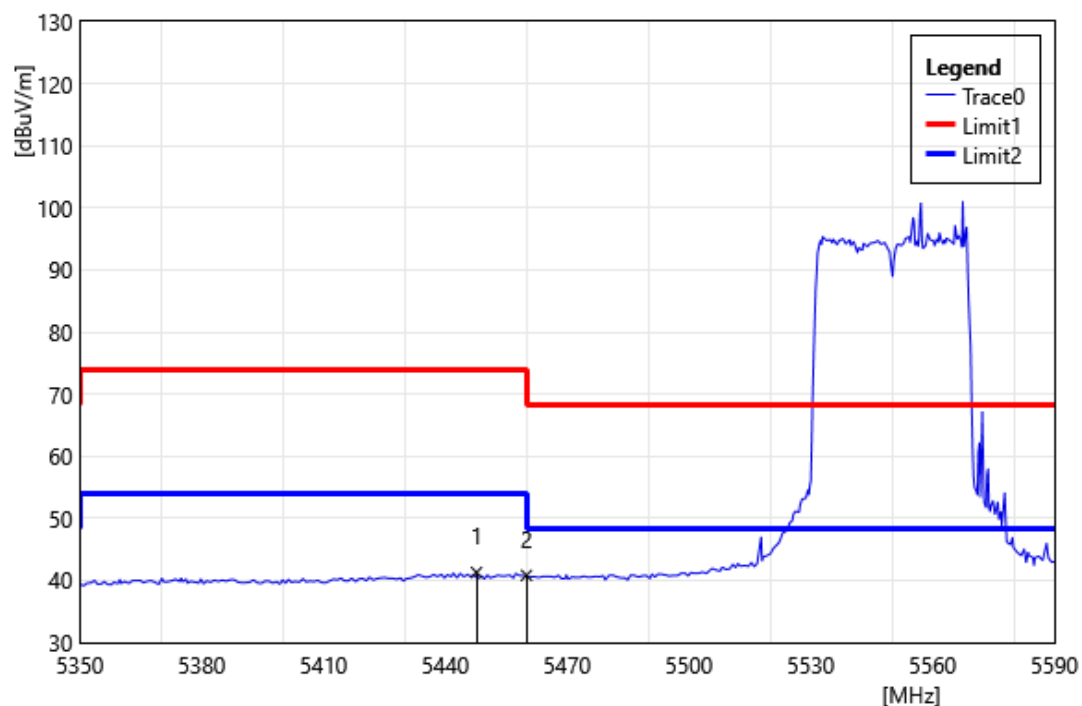


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.68	41.89	-0.60	41.29	54.00	-12.71	AVG
2	5460.00	41.39	-0.57	40.82	54.00	-13.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

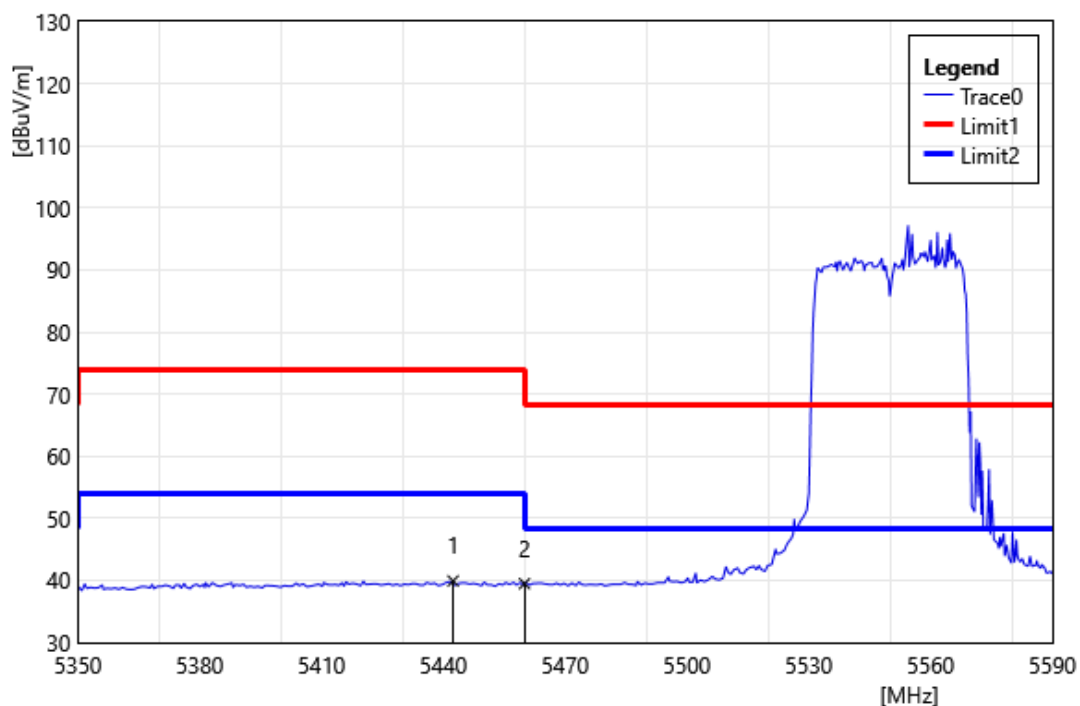


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.40	40.57	-0.64	39.93	54.00	-14.07	AVG
2	5460.00	40.06	-0.57	39.49	54.00	-14.51	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

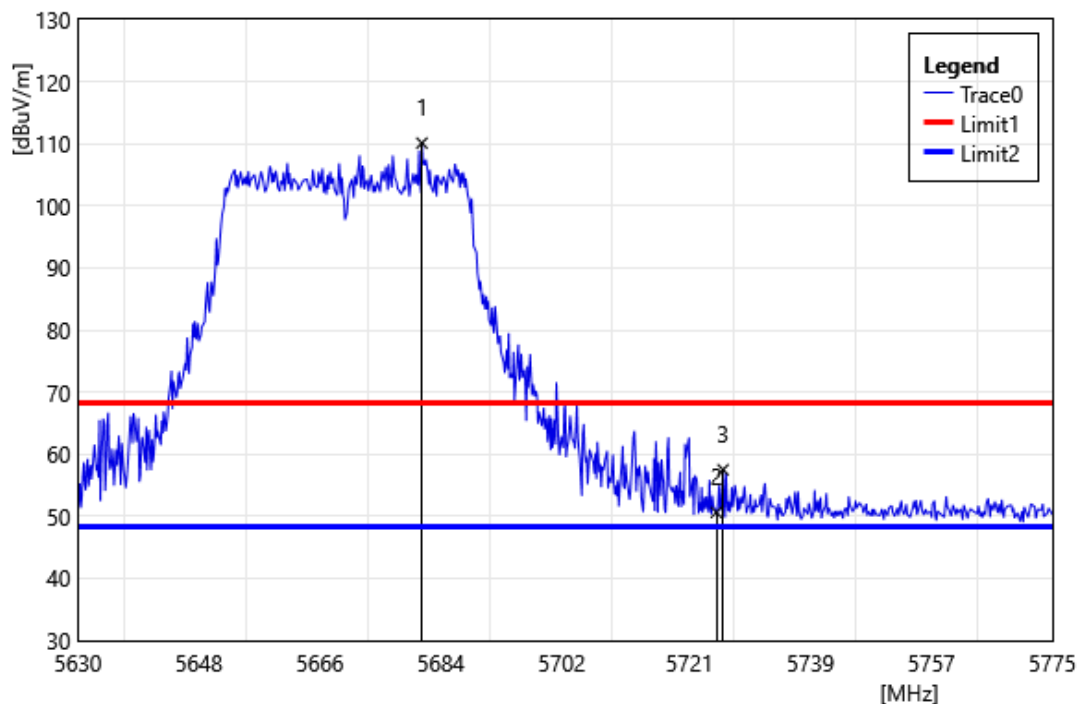


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5681.19	110.74	-0.62	110.12	68.20	41.92	PEAK
2	5725.00	50.97	-0.34	50.63	68.20	-17.57	PEAK
3	5725.99	57.84	-0.33	57.51	68.20	-10.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

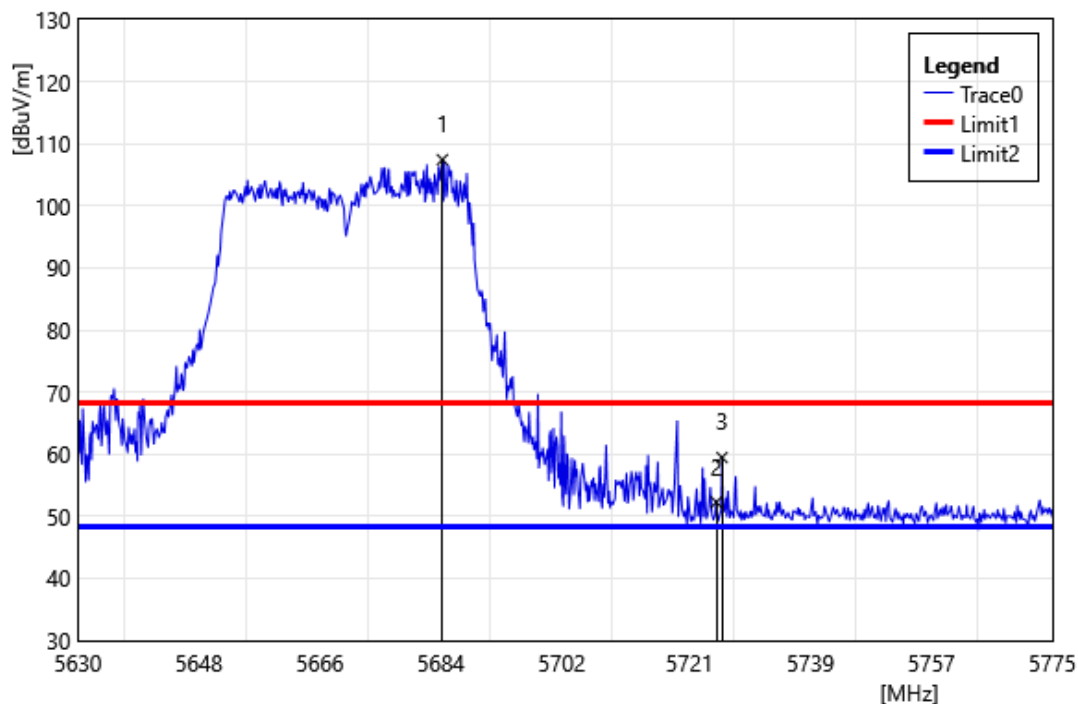


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5684.23	108.07	-0.62	107.45	68.20	39.25	PEAK
2	5725.00	52.62	-0.34	52.28	68.20	-15.92	PEAK
3	5725.85	59.81	-0.34	59.47	68.20	-8.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

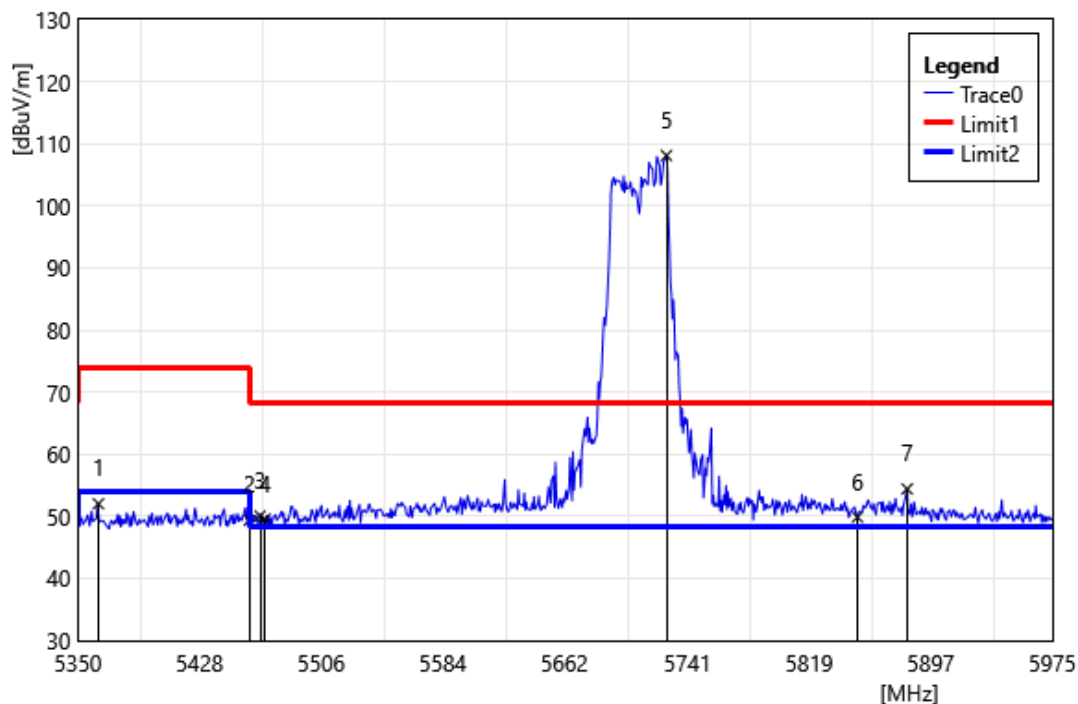


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5363.13	53.23	-1.20	52.03	74.00	-21.97	PEAK
2	5460.00	49.93	-0.57	49.36	74.00	-24.64	PEAK
3	5466.88	50.63	-0.57	50.06	68.20	-18.14	PEAK
4	5470.00	50.12	-0.56	49.56	68.20	-18.64	PEAK
5	5727.50	108.44	-0.32	108.12	68.20	39.92	PEAK
6	5850.00	49.61	0.28	49.89	68.20	-18.31	PEAK
7	5881.88	54.05	0.36	54.41	68.20	-13.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

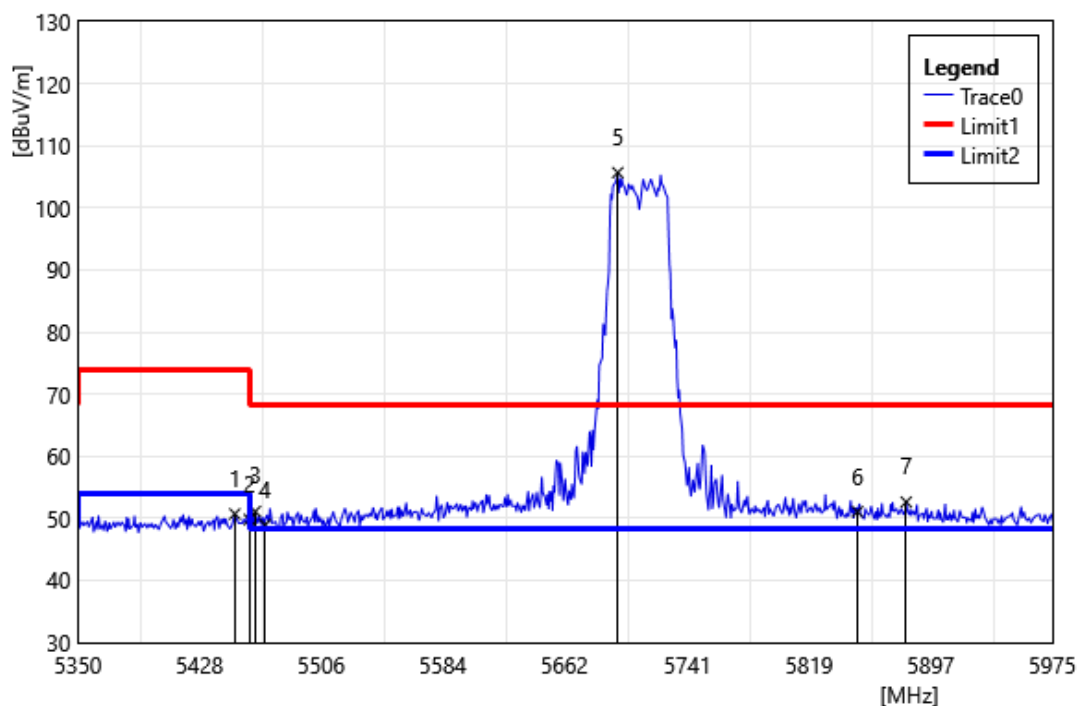


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.63	51.29	-0.58	50.71	74.00	-23.29	PEAK
2	5460.00	50.38	-0.57	49.81	74.00	-24.19	PEAK
3	5463.75	51.68	-0.57	51.11	68.20	-17.09	PEAK
4	5470.00	49.51	-0.56	48.95	68.20	-19.25	PEAK
5	5696.25	106.30	-0.61	105.69	68.20	37.49	PEAK
6	5850.00	50.79	0.28	51.07	68.20	-17.13	PEAK
7	5881.25	52.26	0.36	52.62	68.20	-15.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

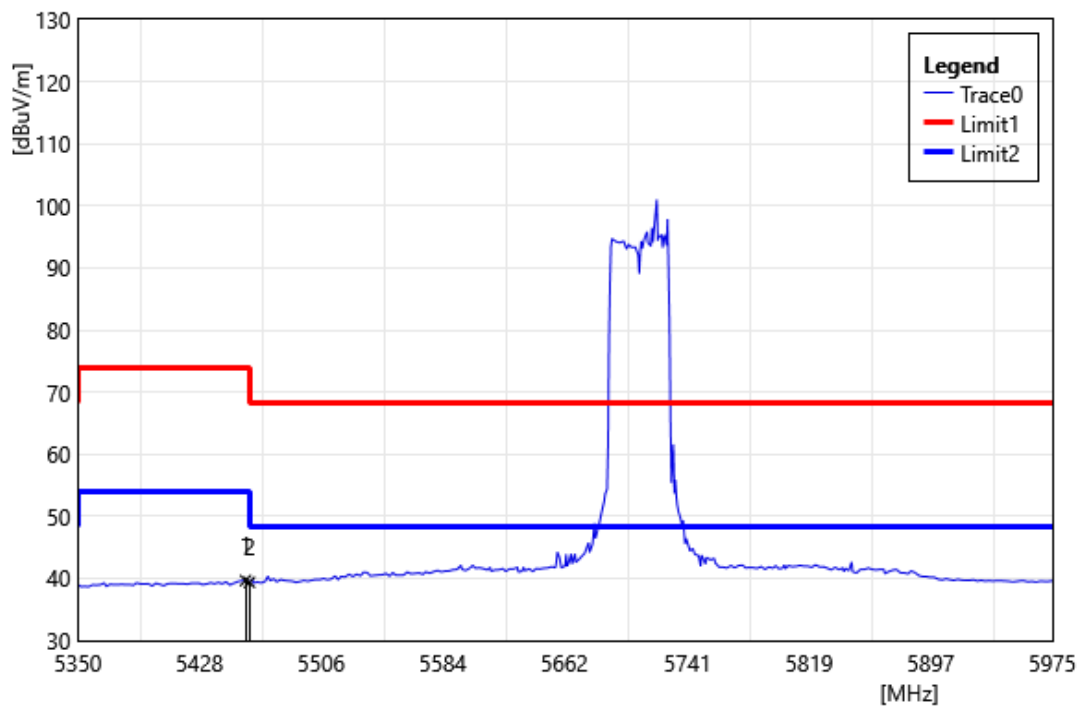


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.50	40.24	-0.58	39.67	54.00	-14.34	AVG
2	5460.00	39.95	-0.57	39.38	54.00	-14.62	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

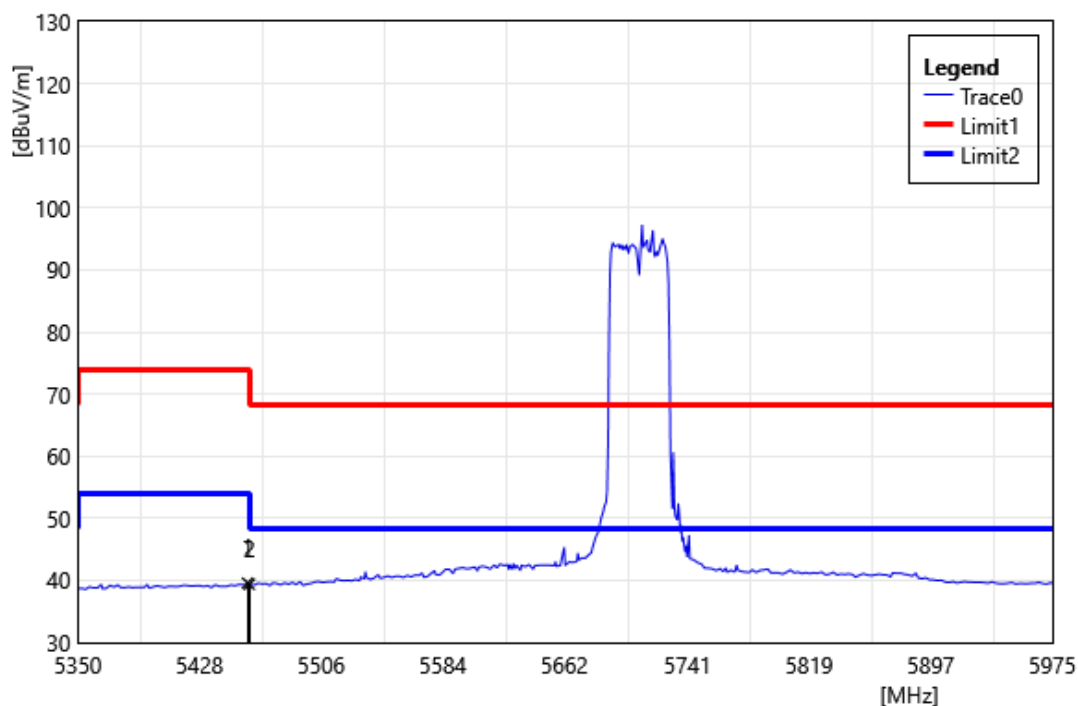


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.75	40.14	-0.57	39.57	54.00	-14.43	AVG
2	5460.00	39.93	-0.57	39.36	54.00	-14.64	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755 MHz		
Polarization:	Vertical		
Remark:			

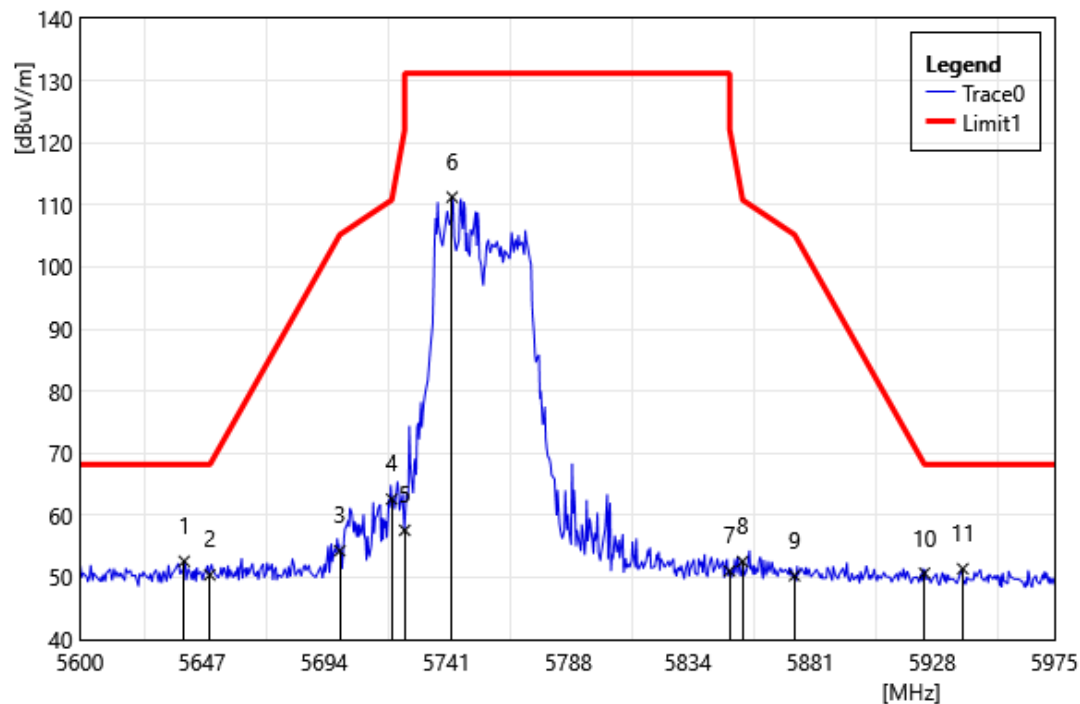


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5640.13	53.23	-0.63	52.60	68.20	-15.60	PEAK
2	5650.00	51.05	-0.64	50.41	68.20	-17.79	PEAK
3	5700.00	54.90	-0.61	54.29	105.20	-50.91	PEAK
4	5720.00	63.01	-0.40	62.61	110.80	-48.19	PEAK
5	5725.00	57.94	-0.34	57.60	131.20	-73.60	PEAK
6	5743.25	111.40	-0.15	111.25	131.20	-19.95	PEAK
7	5850.00	50.75	0.28	51.03	122.20	-71.17	PEAK
8	5855.00	52.26	0.29	52.55	110.80	-58.25	PEAK
9	5875.00	49.97	0.34	50.31	105.20	-54.89	PEAK
10	5925.00	50.38	0.28	50.66	68.20	-17.54	PEAK
11	5939.75	51.20	0.20	51.40	68.20	-16.80	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5755 MHz		
Polarization:	Horizontal		
Remark:			

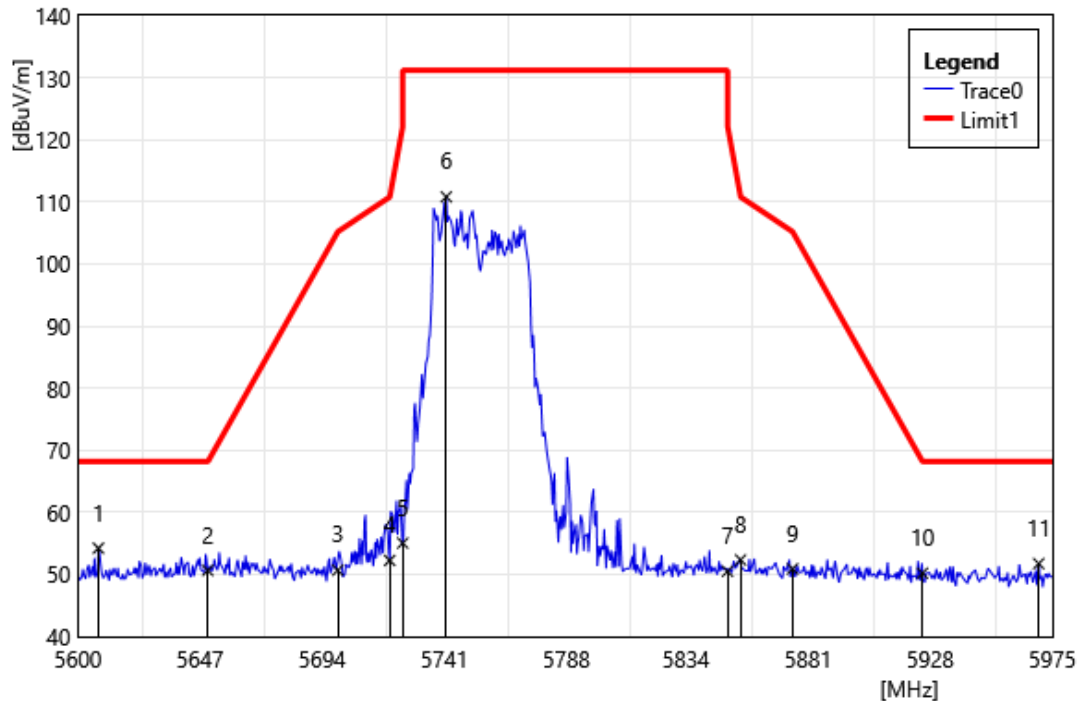


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5607.88	54.81	-0.58	54.23	68.20	-13.97	PEAK
2	5650.00	51.30	-0.64	50.66	68.20	-17.55	PEAK
3	5700.00	51.30	-0.61	50.69	105.20	-54.51	PEAK
4	5720.00	52.66	-0.40	52.26	110.80	-58.54	PEAK
5	5725.00	55.40	-0.34	55.06	131.20	-76.14	PEAK
6	5741.75	110.98	-0.17	110.81	131.20	-20.39	PEAK
7	5850.00	50.23	0.28	50.51	122.20	-71.69	PEAK
8	5855.00	52.05	0.29	52.34	110.80	-58.46	PEAK
9	5875.00	50.56	0.34	50.90	105.20	-54.30	PEAK
10	5925.00	49.93	0.28	50.21	68.20	-17.99	PEAK
11	5969.75	51.56	0.19	51.75	68.20	-16.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795 MHz		
Polarization:	Vertical		
Remark:			

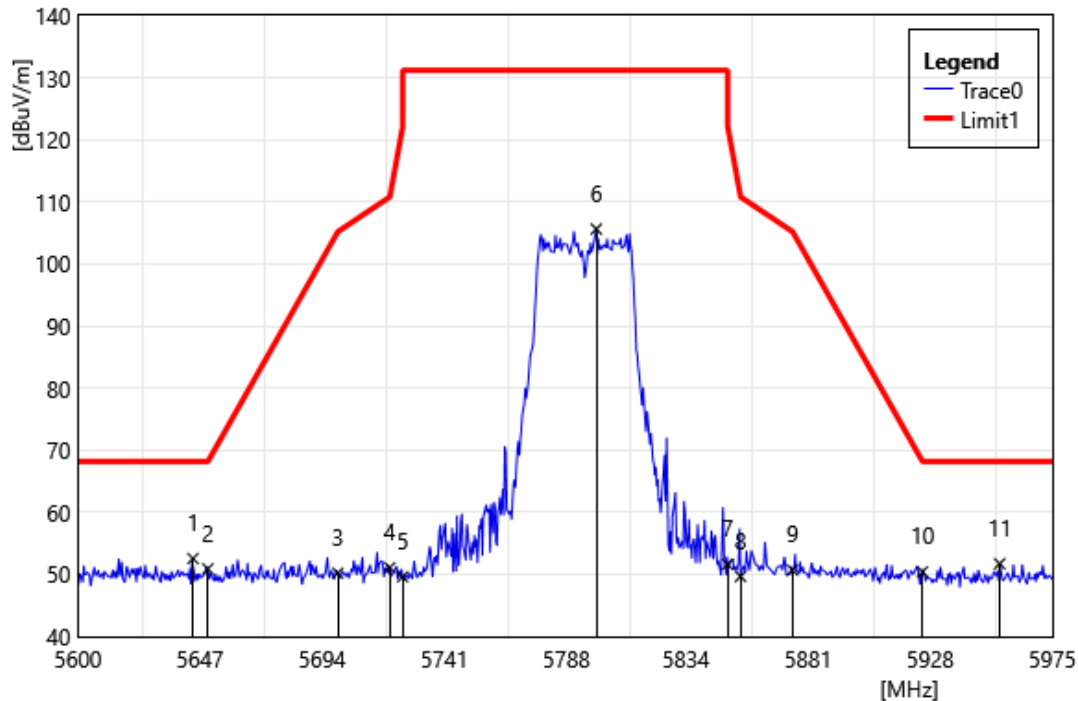


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5644.25	53.20	-0.63	52.57	68.20	-15.63	PEAK
2	5650.00	51.55	-0.64	50.91	68.20	-17.29	PEAK
3	5700.00	50.84	-0.61	50.23	105.20	-54.97	PEAK
4	5720.00	51.50	-0.40	51.10	110.80	-59.70	PEAK
5	5725.00	49.96	-0.34	49.62	131.20	-81.58	PEAK
6	5799.50	105.48	0.15	105.63	131.20	-25.57	PEAK
7	5850.00	51.35	0.28	51.63	122.20	-70.57	PEAK
8	5855.00	49.40	0.29	49.69	110.80	-61.11	PEAK
9	5875.00	50.37	0.34	50.71	105.20	-54.49	PEAK
10	5925.00	50.13	0.28	50.41	68.20	-17.79	PEAK
11	5954.75	51.57	0.15	51.72	68.20	-16.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

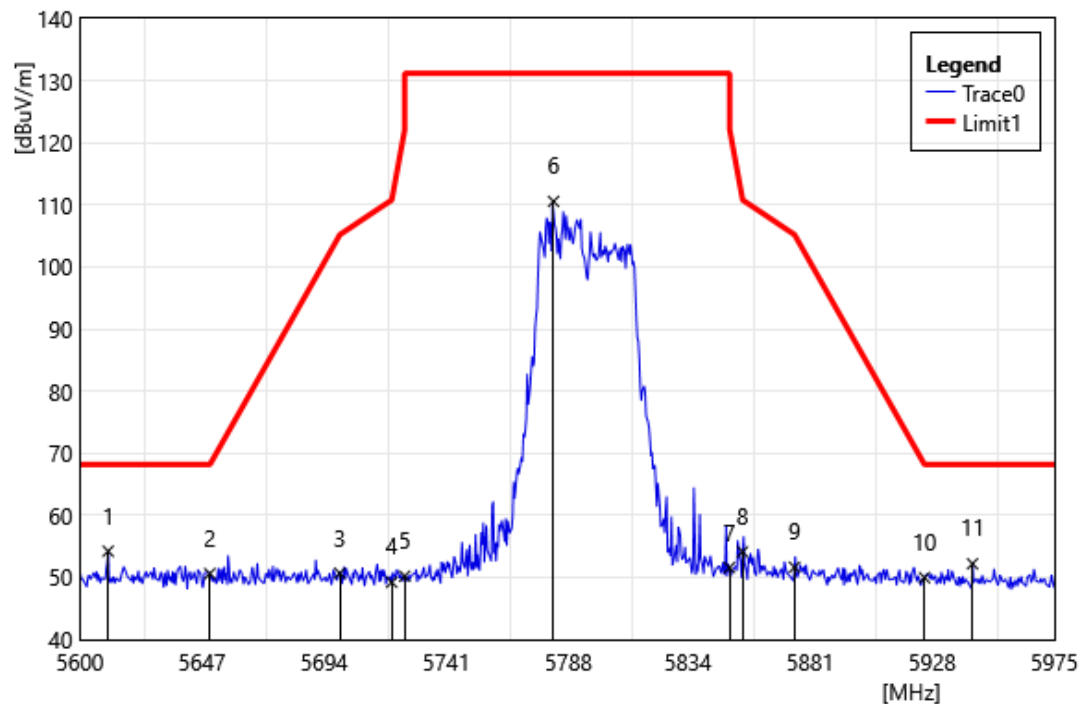


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5610.88	54.81	-0.59	54.22	68.20	-13.98	PEAK
2	5650.00	51.25	-0.64	50.61	68.20	-17.59	PEAK
3	5700.00	51.29	-0.61	50.68	105.20	-54.52	PEAK
4	5720.00	49.62	-0.40	49.22	110.80	-61.58	PEAK
5	5725.00	50.55	-0.34	50.21	131.20	-80.99	PEAK
6	5782.25	110.49	0.07	110.56	131.20	-20.64	PEAK
7	5850.00	51.30	0.28	51.58	122.20	-70.62	PEAK
8	5855.00	53.83	0.29	54.12	110.80	-56.68	PEAK
9	5875.00	51.31	0.34	51.65	105.20	-53.55	PEAK
10	5925.00	49.69	0.28	49.97	68.20	-18.23	PEAK
11	5943.50	52.01	0.18	52.19	68.20	-16.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

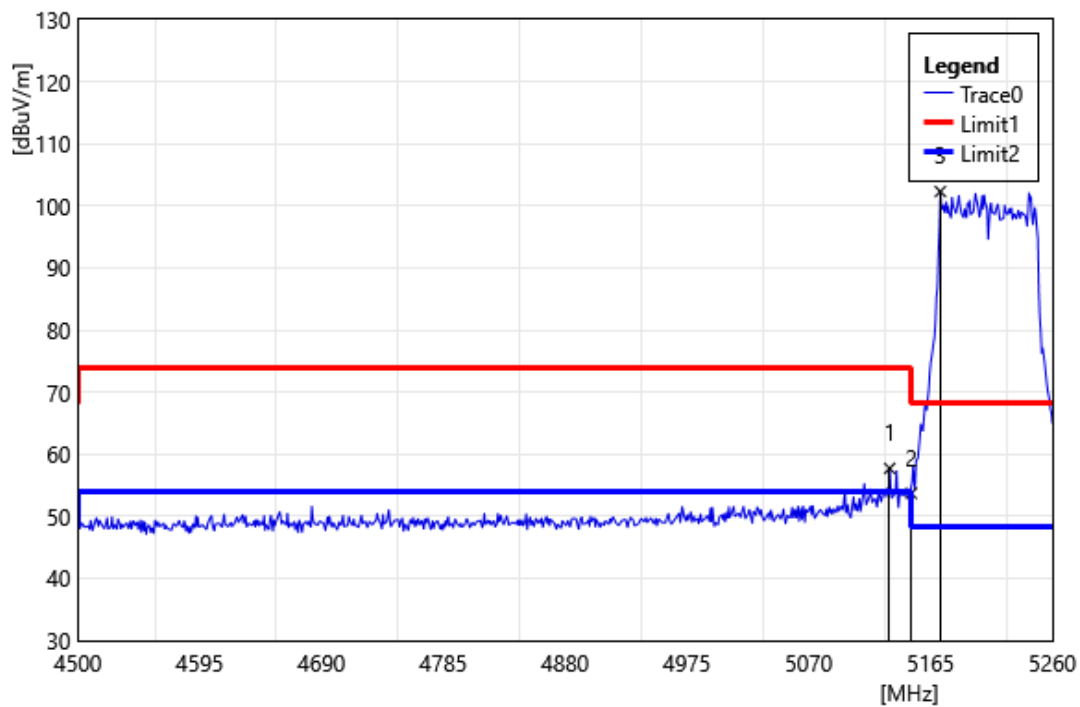


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5133.08	58.61	-0.89	57.72	74.00	-16.28	PEAK
2	5150.00	54.61	-0.91	53.70	74.00	-20.30	PEAK
3	5172.60	103.34	-1.02	102.32	68.20	34.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

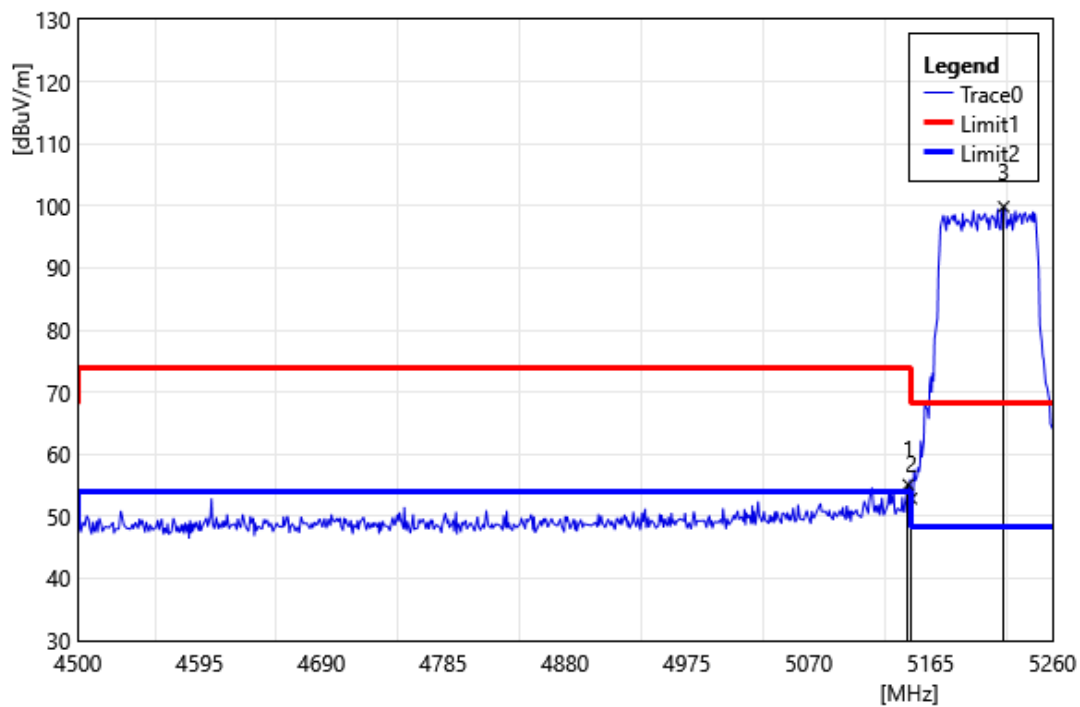


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	56.00	-0.91	55.10	74.00	-18.91	PEAK
2	5150.00	53.75	-0.91	52.84	74.00	-21.16	PEAK
3	5222.00	101.18	-1.31	99.87	68.20	31.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

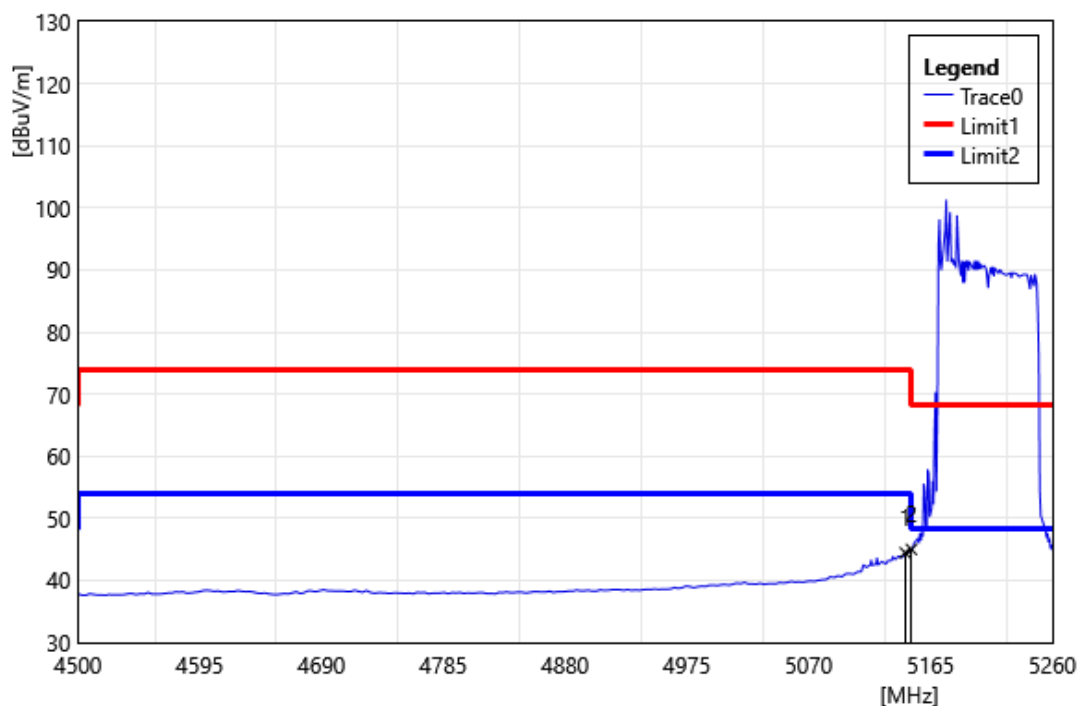


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	45.37	-0.90	44.47	54.00	-9.53	AVG
2	5150.00	45.91	-0.91	45.00	54.00	-9.00	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

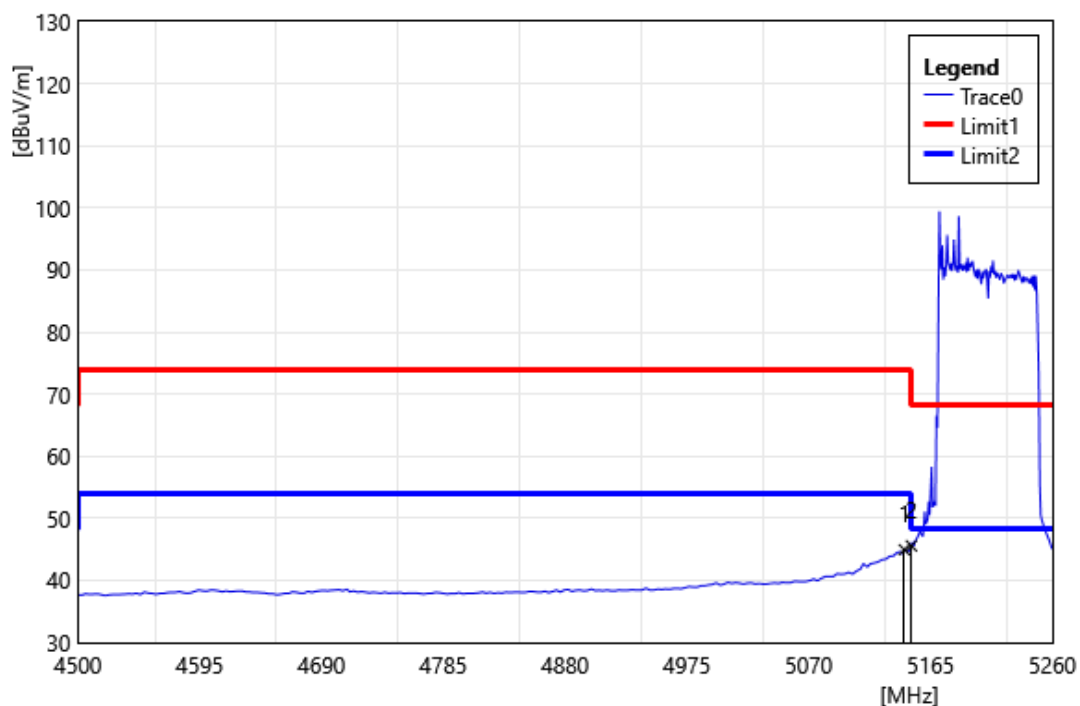


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	45.85	-0.90	44.95	54.00	-9.05	AVG
2	5150.00	46.49	-0.91	45.58	54.00	-8.42	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

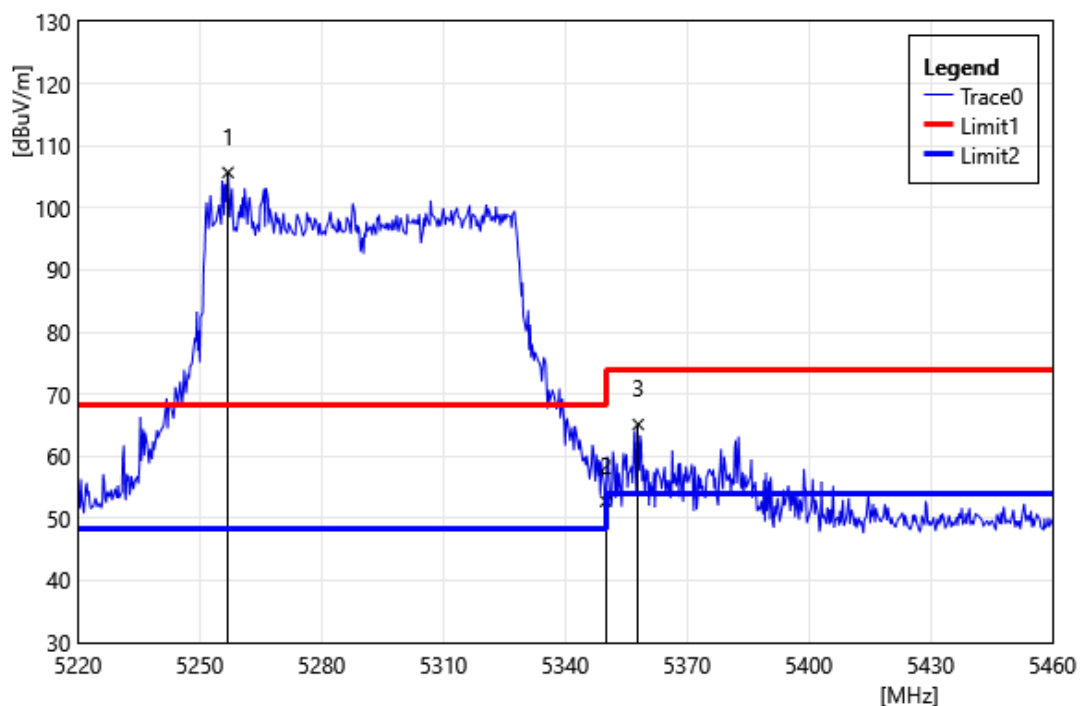


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5256.96	107.22	-1.52	105.71	68.20	37.51	PEAK
2	5350.00	54.04	-1.29	52.75	74.00	-21.25	PEAK
3	5358.00	66.36	-1.24	65.12	74.00	-8.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

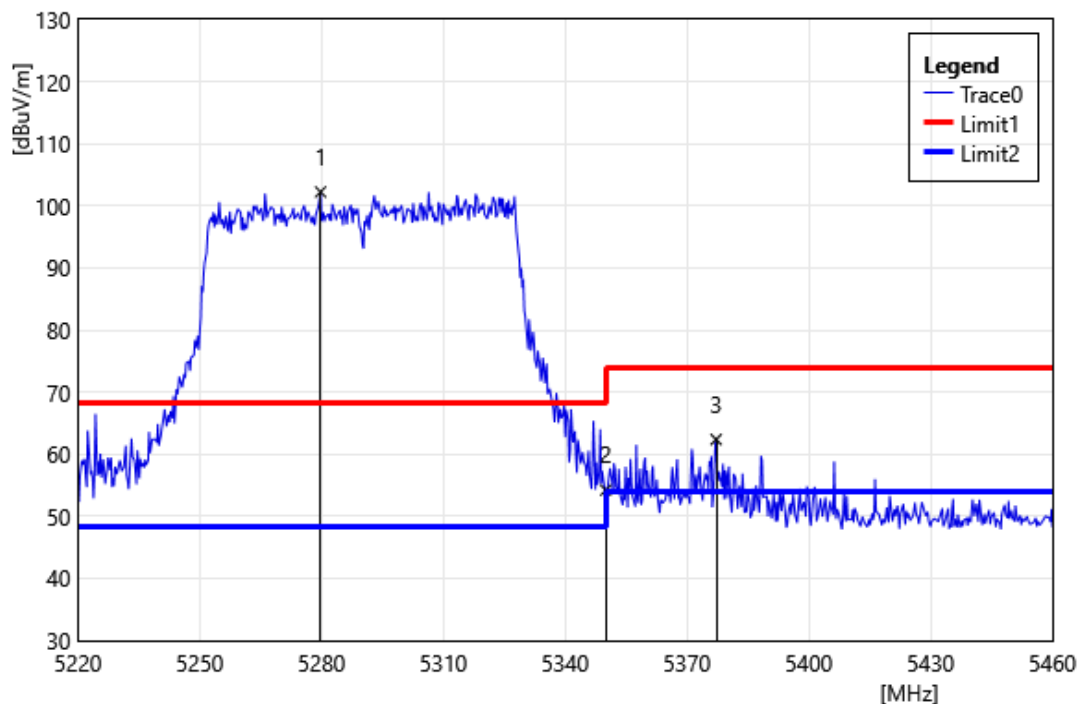


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5279.76	103.82	-1.59	102.24	68.20	34.04	PEAK
2	5350.00	55.52	-1.29	54.23	74.00	-19.77	PEAK
3	5377.20	63.48	-1.10	62.38	74.00	-11.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

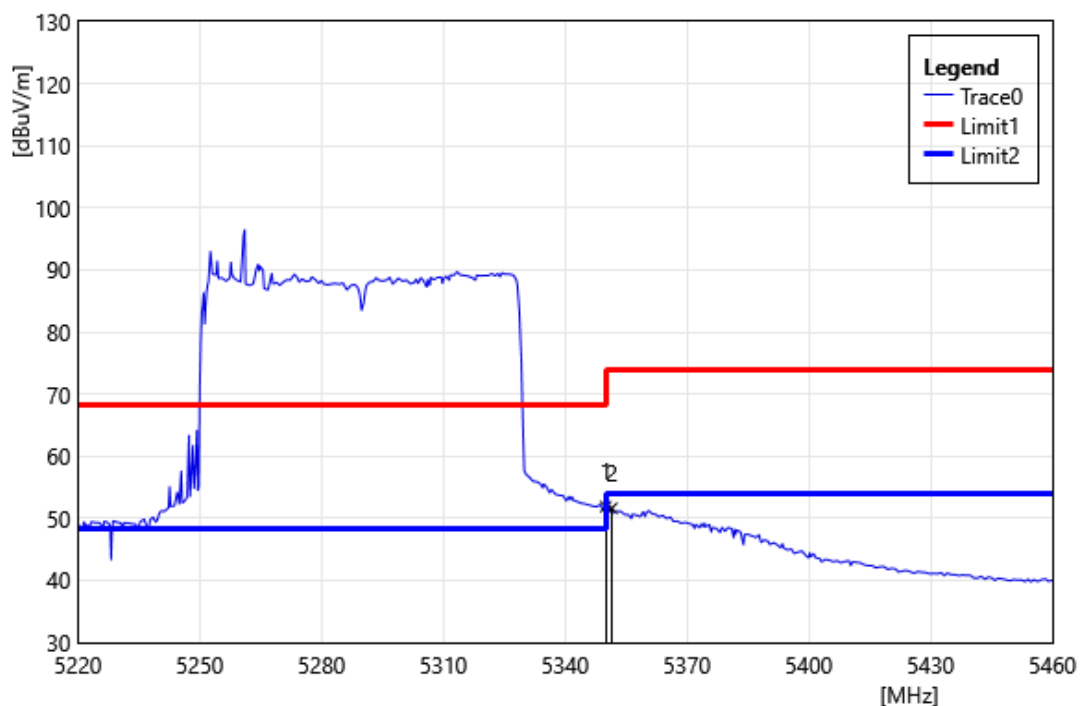


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	53.18	-1.29	51.88	54.00	-2.12	AVG
2	5351.52	52.90	-1.28	51.63	54.00	-2.38	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

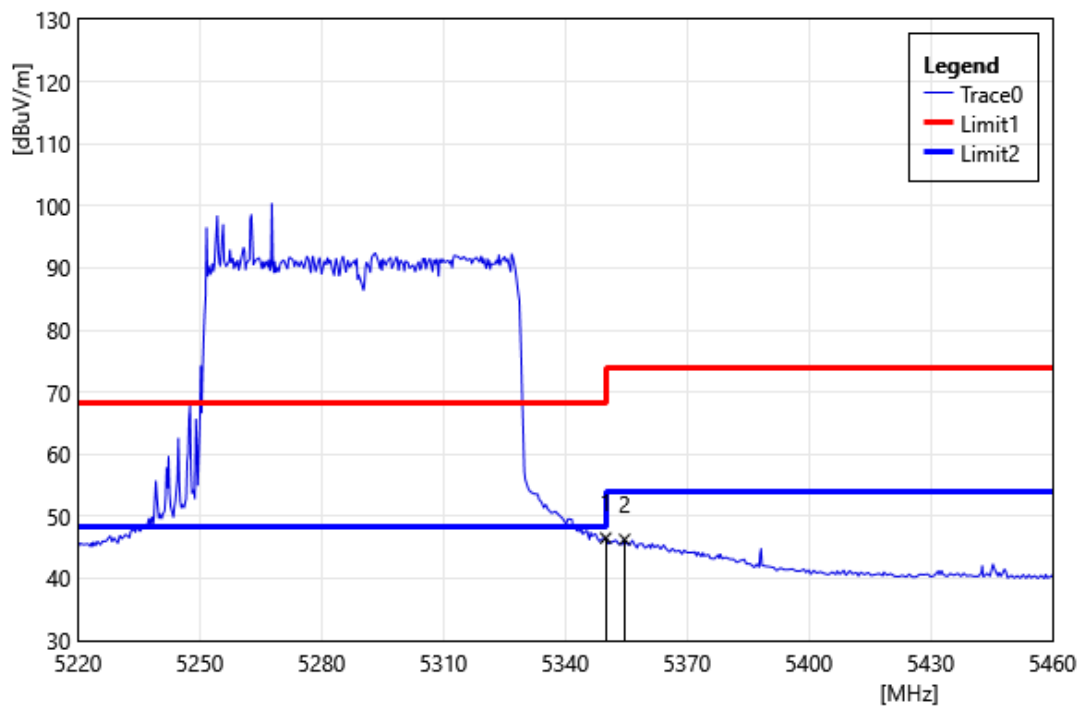


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	47.79	-1.29	46.50	54.00	-7.50	AVG
2	5354.64	47.53	-1.26	46.27	54.00	-7.73	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

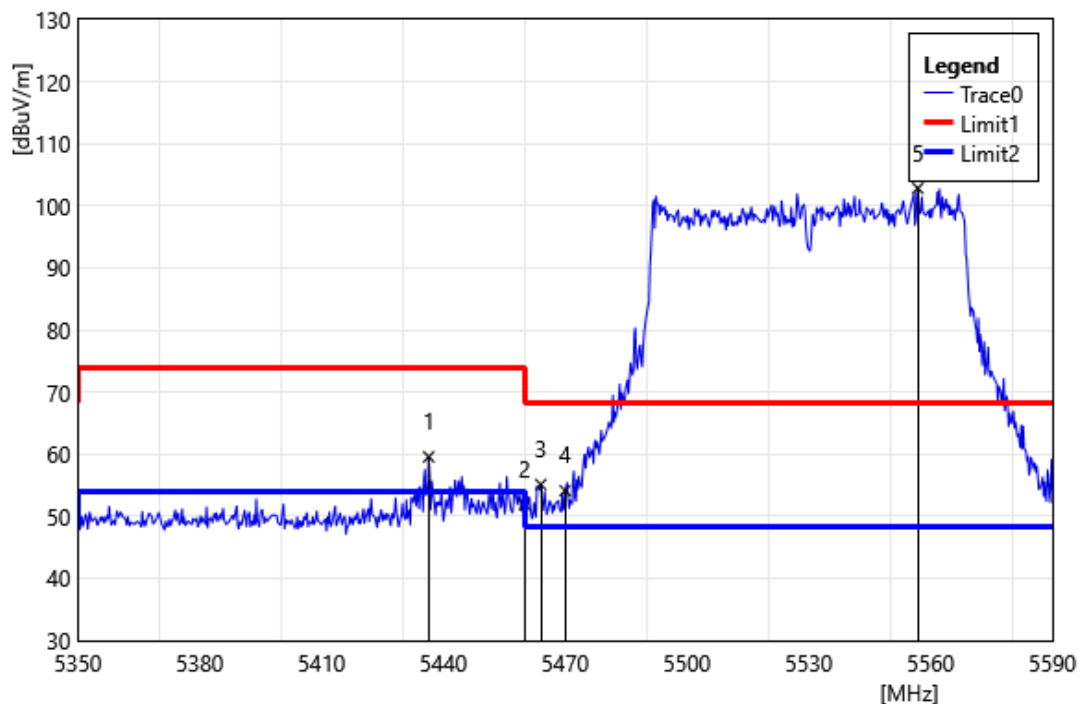


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5436.40	60.27	-0.68	59.59	74.00	-14.41	PEAK
2	5460.00	52.47	-0.57	51.90	74.00	-22.10	PEAK
3	5464.00	55.70	-0.57	55.13	68.20	-13.07	PEAK
4	5470.00	54.69	-0.56	54.13	68.20	-14.07	PEAK
5	5556.88	103.36	-0.51	102.85	68.20	34.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

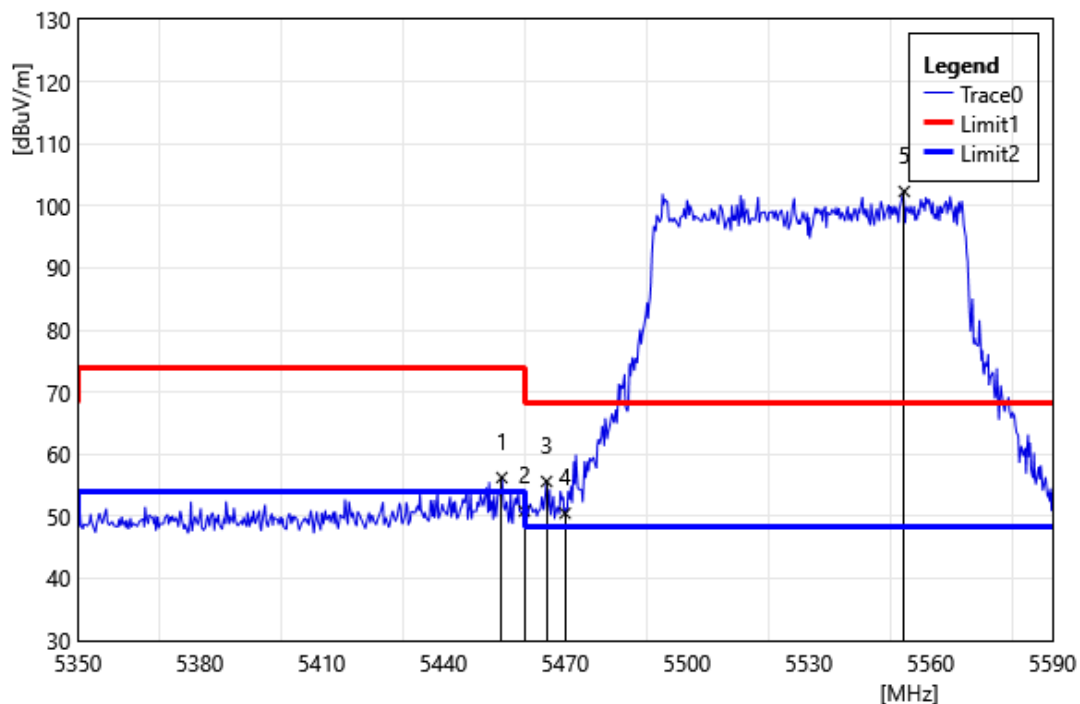


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.40	56.82	-0.58	56.24	74.00	-17.76	PEAK
2	5460.00	51.41	-0.57	50.84	74.00	-23.16	PEAK
3	5465.44	56.19	-0.57	55.62	68.20	-12.58	PEAK
4	5470.00	51.07	-0.56	50.51	68.20	-17.69	PEAK
5	5553.52	102.82	-0.50	102.32	68.20	34.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

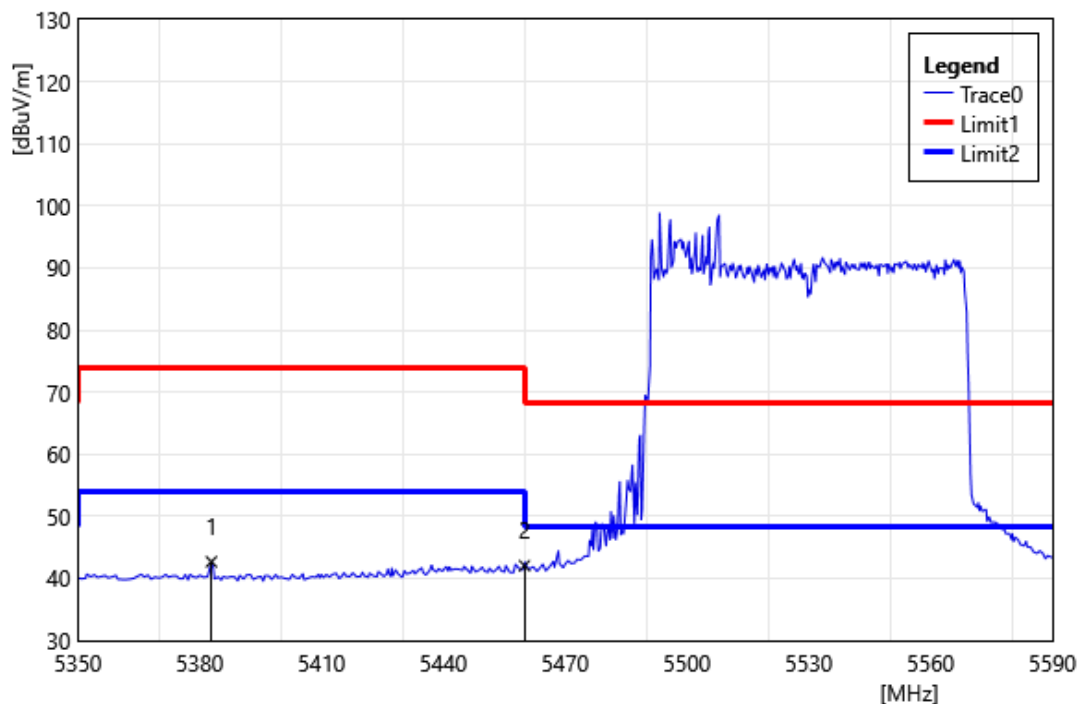


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5382.88	43.75	-1.06	42.69	54.00	-11.31	AVG
2	5460.00	42.62	-0.57	42.05	54.00	-11.95	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

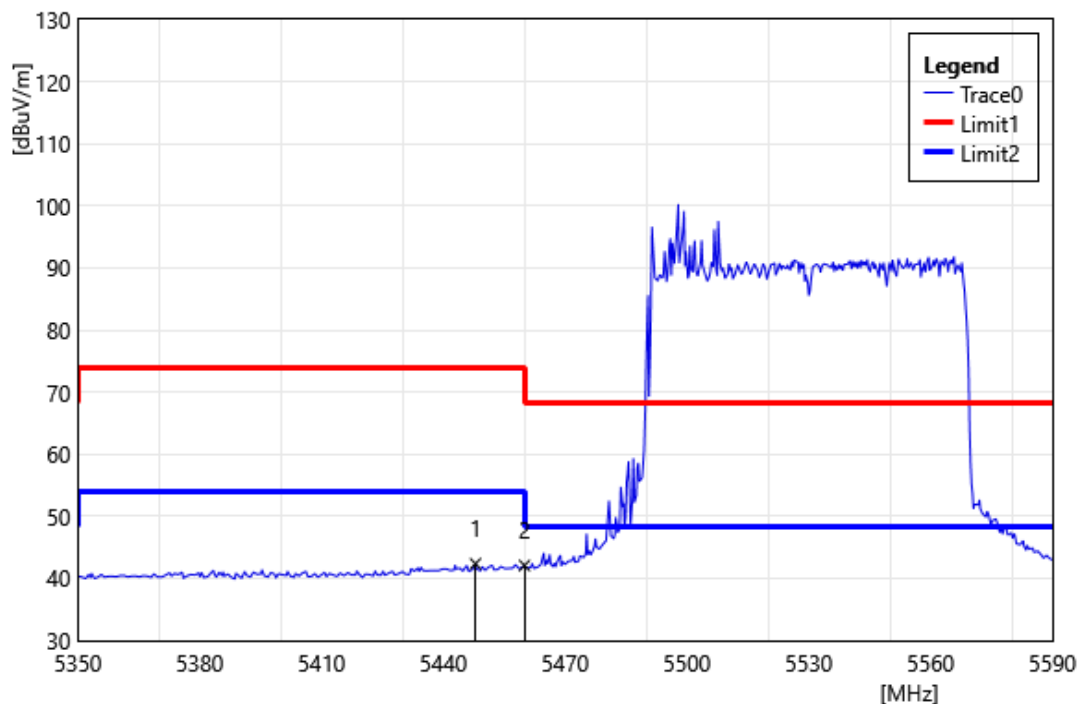


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.92	42.97	-0.60	42.37	54.00	-11.63	AVG
2	5460.00	42.65	-0.57	42.08	54.00	-11.92	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

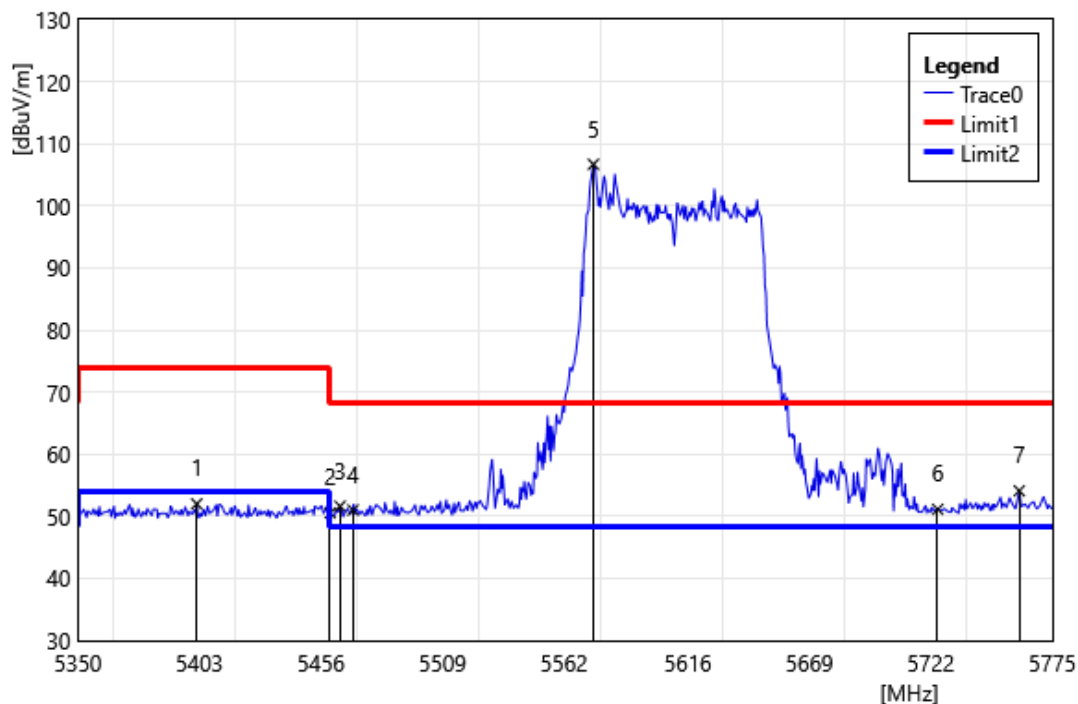


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5401.85	52.92	-0.92	52.00	74.00	-22.00	PEAK
2	5460.00	51.11	-0.57	50.54	74.00	-23.46	PEAK
3	5464.33	52.19	-0.57	51.62	68.20	-16.58	PEAK
4	5470.00	51.58	-0.56	51.02	68.20	-17.18	PEAK
5	5574.83	107.23	-0.53	106.70	68.20	38.50	PEAK
6	5725.00	51.47	-0.34	51.13	68.20	-17.07	PEAK
7	5760.55	54.14	-0.03	54.11	68.20	-14.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

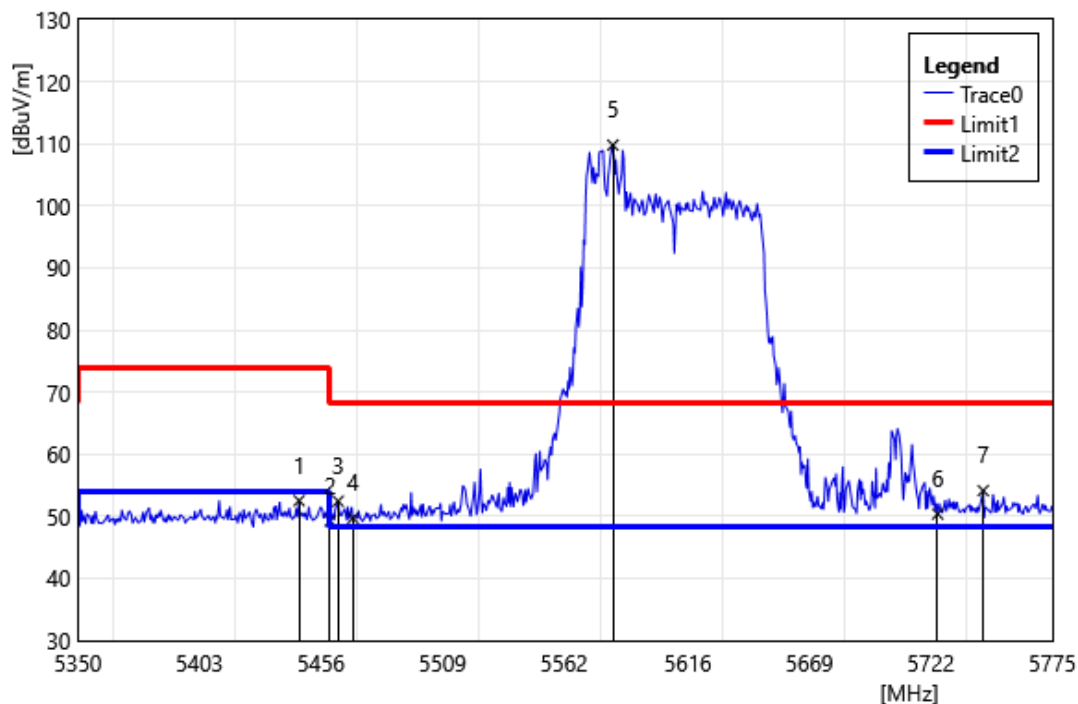


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5446.48	53.14	-0.61	52.53	74.00	-21.47	PEAK
2	5460.00	49.83	-0.57	49.26	74.00	-24.74	PEAK
3	5463.48	53.02	-0.57	52.46	68.20	-15.75	PEAK
4	5470.00	50.28	-0.56	49.72	68.20	-18.48	PEAK
5	5583.33	110.34	-0.55	109.79	68.20	41.59	PEAK
6	5725.00	50.72	-0.34	50.38	68.20	-17.82	PEAK
7	5744.83	54.27	-0.13	54.14	68.20	-14.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

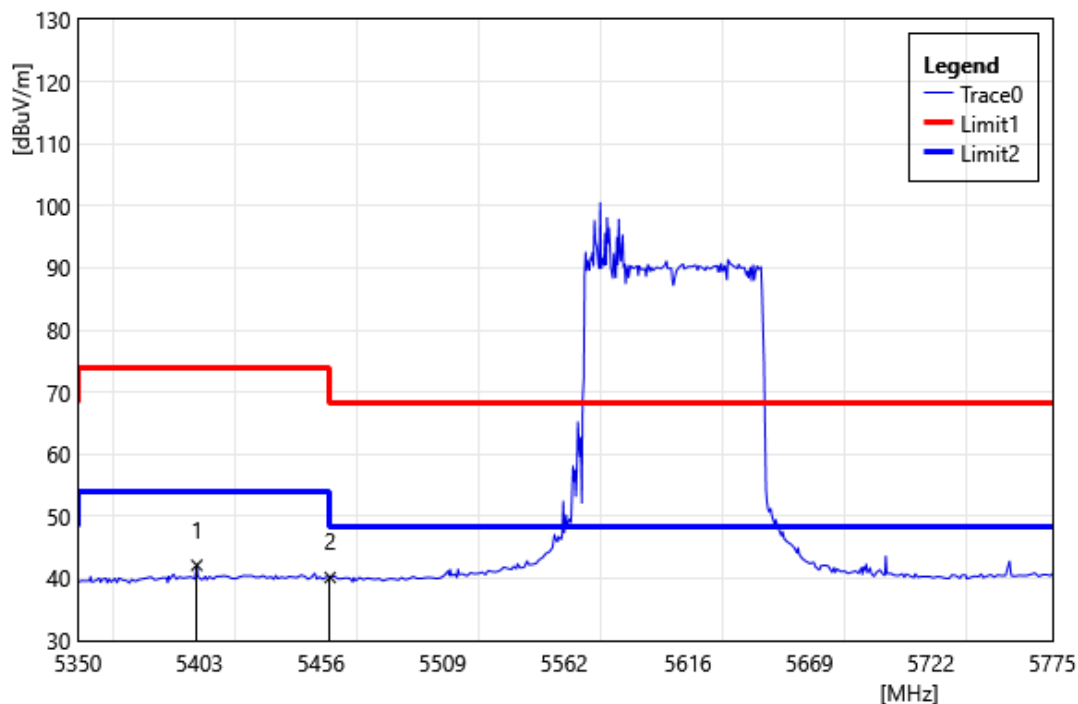


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5401.85	43.04	-0.92	42.12	54.00	-11.89	AVG
2	5460.00	40.72	-0.57	40.15	54.00	-13.85	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

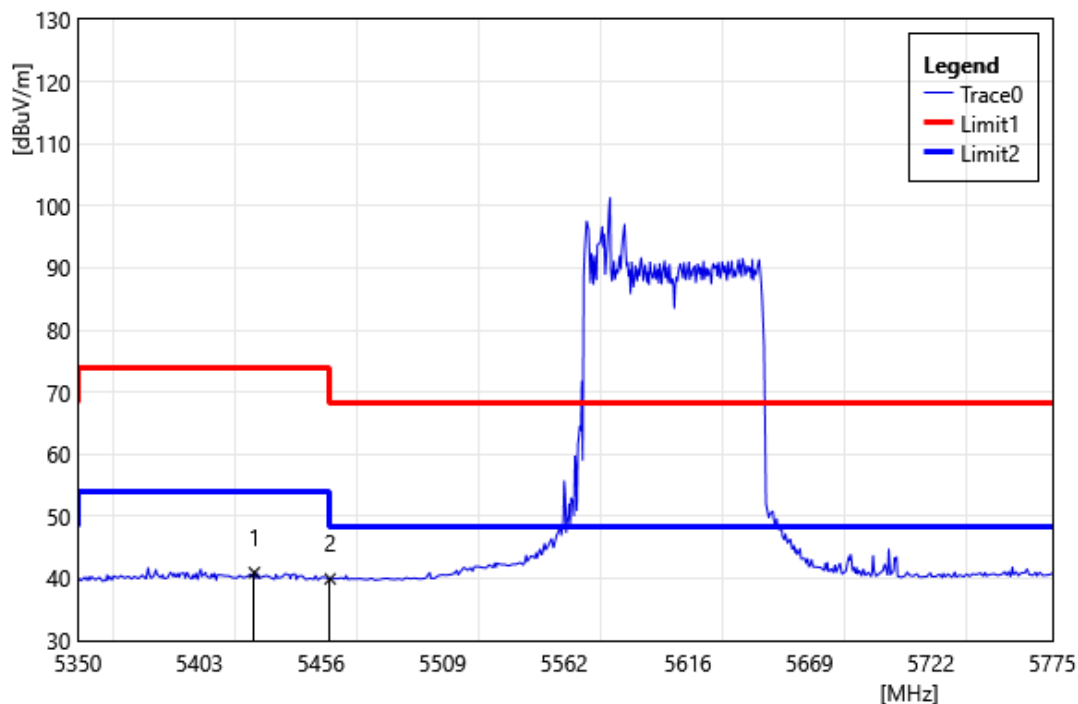


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5426.93	41.69	-0.75	40.94	54.00	-13.06	AVG
2	5460.00	40.50	-0.57	39.93	54.00	-14.07	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

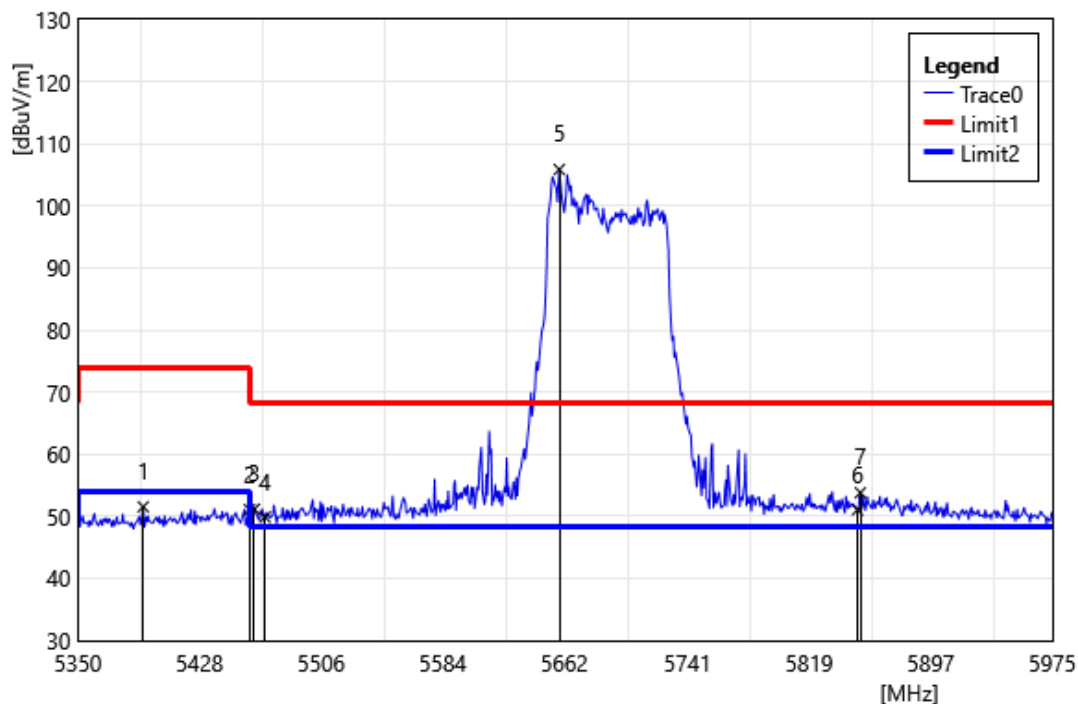


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5391.88	52.53	-1.00	51.53	74.00	-22.47	PEAK
2	5460.00	51.65	-0.57	51.08	74.00	-22.92	PEAK
3	5463.13	51.73	-0.57	51.16	68.20	-17.04	PEAK
4	5470.00	50.43	-0.56	49.87	68.20	-18.33	PEAK
5	5658.75	106.50	-0.63	105.87	68.20	37.67	PEAK
6	5850.00	50.75	0.28	51.03	68.20	-17.17	PEAK
7	5851.88	53.52	0.28	53.80	68.20	-14.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

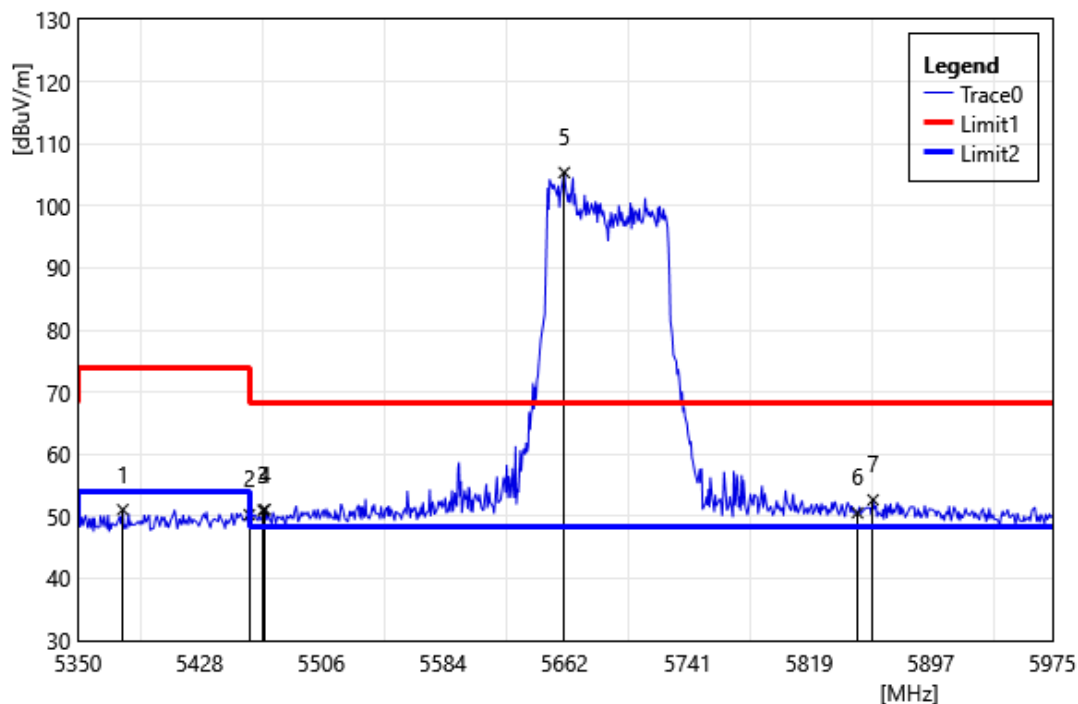


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5378.75	52.17	-1.09	51.08	74.00	-22.93	PEAK
2	5460.00	50.83	-0.57	50.26	74.00	-23.74	PEAK
3	5468.75	51.53	-0.56	50.97	68.20	-17.23	PEAK
4	5470.00	51.66	-0.56	51.10	68.20	-17.10	PEAK
5	5661.88	106.00	-0.63	105.37	68.20	37.17	PEAK
6	5850.00	50.27	0.28	50.55	68.20	-17.65	PEAK
7	5860.00	52.35	0.31	52.66	68.20	-15.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

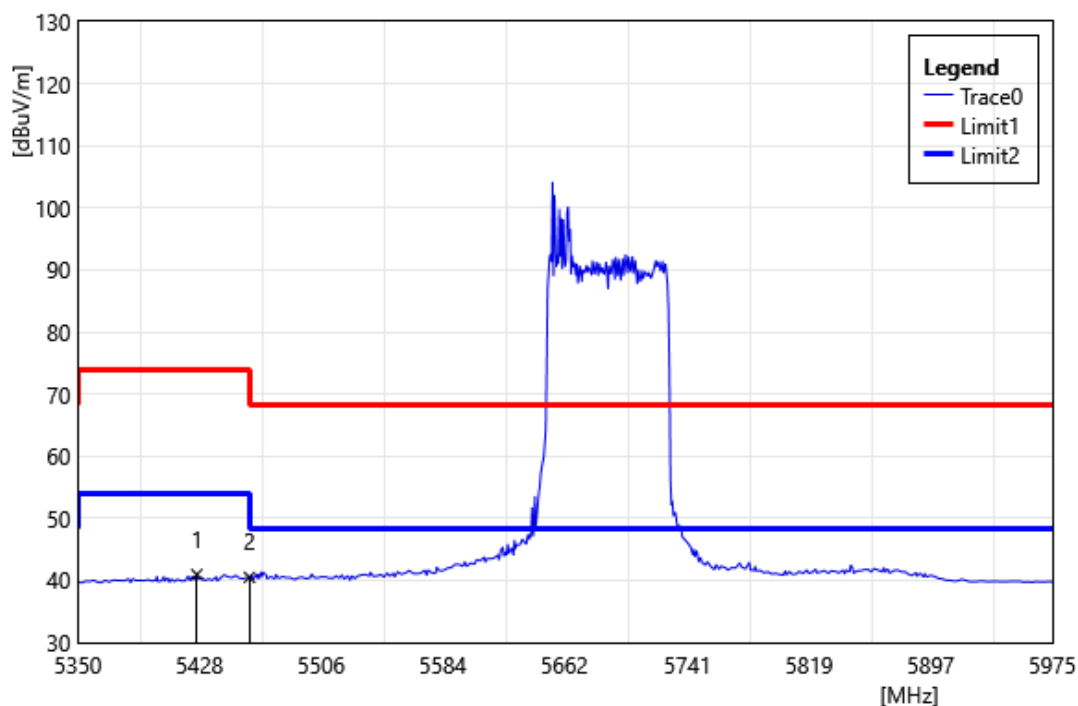


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5426.25	41.69	-0.75	40.94	54.00	-13.06	AVG
2	5460.00	41.08	-0.57	40.51	54.00	-13.49	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5690 MHz		
Polarization:	Horizontal		
Remark:			

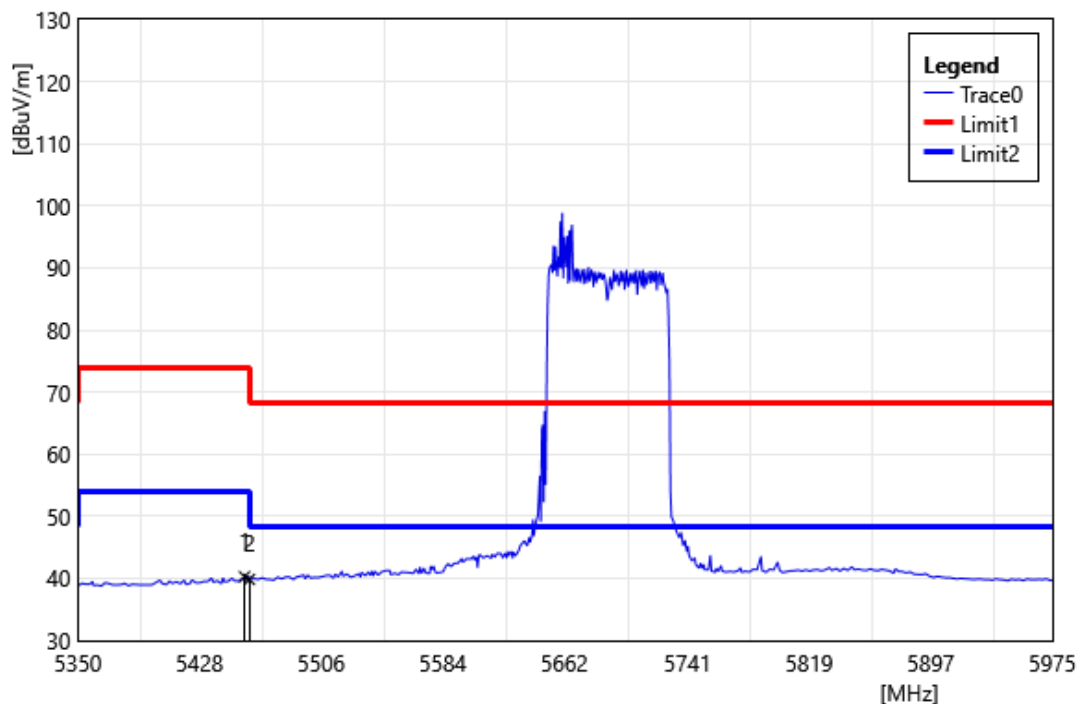


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.88	40.86	-0.58	40.28	54.00	-13.72	AVG
2	5460.00	40.41	-0.57	39.84	54.00	-14.16	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

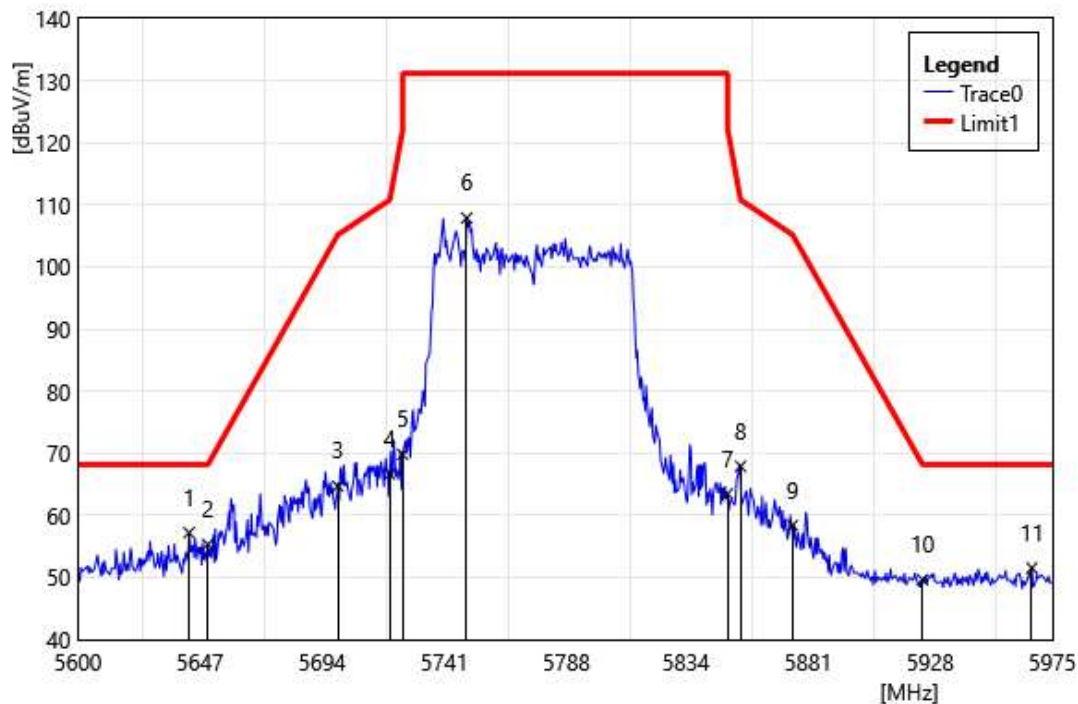


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5642.75	57.84	-0.63	57.21	68.20	-10.99	PEAK
2	5650.00	55.97	-0.64	55.33	68.20	-12.87	PEAK
3	5700.00	65.30	-0.61	64.69	105.20	-40.51	PEAK
4	5720.00	67.04	-0.40	66.64	110.80	-44.16	PEAK
5	5725.00	70.16	-0.34	69.82	131.20	-61.38	PEAK
6	5749.63	107.99	-0.08	107.91	131.20	-23.29	PEAK
7	5850.00	63.19	0.28	63.47	122.20	-58.73	PEAK
8	5855.00	67.61	0.29	67.90	110.80	-42.90	PEAK
9	5875.00	58.03	0.34	58.37	105.20	-46.83	PEAK
10	5925.00	49.35	0.28	49.63	68.20	-18.57	PEAK
11	5967.13	51.34	0.18	51.52	68.20	-16.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

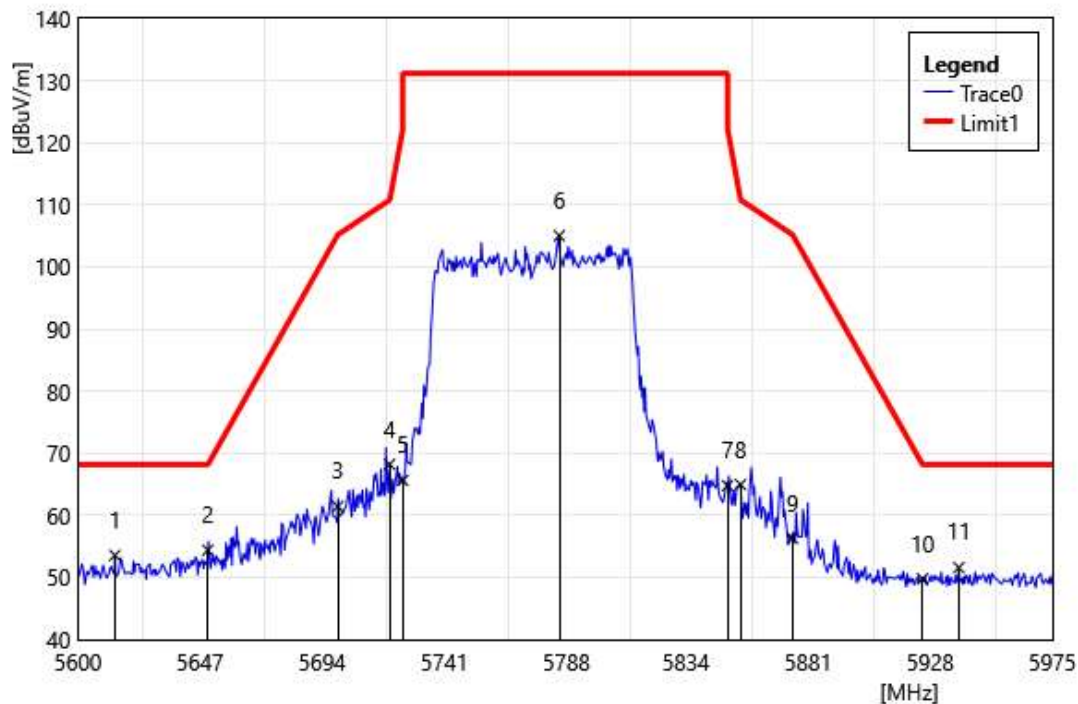


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5614.25	54.14	-0.59	53.55	68.20	-14.65	PEAK
2	5650.00	55.03	-0.64	54.39	68.20	-13.81	PEAK
3	5700.00	62.05	-0.61	61.44	105.20	-43.76	PEAK
4	5720.00	68.62	-0.40	68.22	110.80	-42.58	PEAK
5	5725.00	65.97	-0.34	65.63	131.20	-65.57	PEAK
6	5785.25	104.96	0.08	105.05	131.20	-26.16	PEAK
7	5850.00	64.51	0.28	64.79	122.20	-57.41	PEAK
8	5855.00	64.67	0.29	64.96	110.80	-45.84	PEAK
9	5875.00	55.97	0.34	56.31	105.20	-48.89	PEAK
10	5925.00	49.49	0.28	49.77	68.20	-18.43	PEAK
11	5939.00	51.39	0.20	51.59	68.20	-16.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

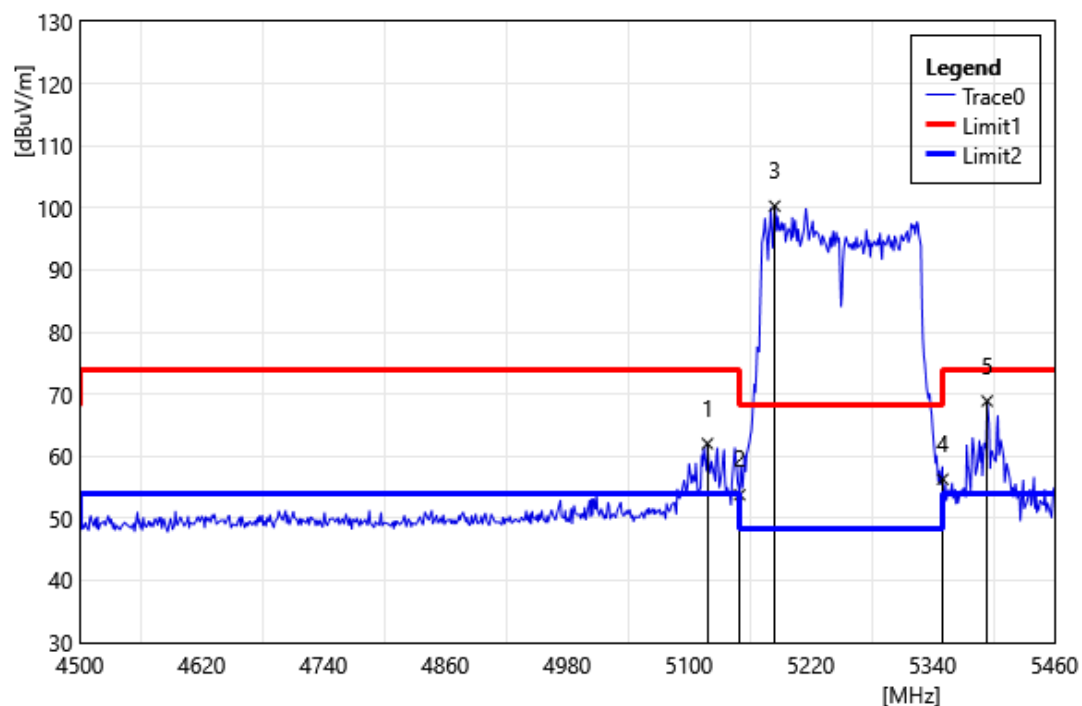


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5118.24	62.92	-0.88	62.04	74.00	-11.96	PEAK
2	5150.00	54.70	-0.91	53.80	74.00	-20.20	PEAK
3	5184.48	101.37	-1.08	100.29	68.20	32.09	PEAK
4	5350.00	57.59	-1.29	56.30	74.00	-17.70	PEAK
5	5393.76	69.88	-0.98	68.90	74.00	-5.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

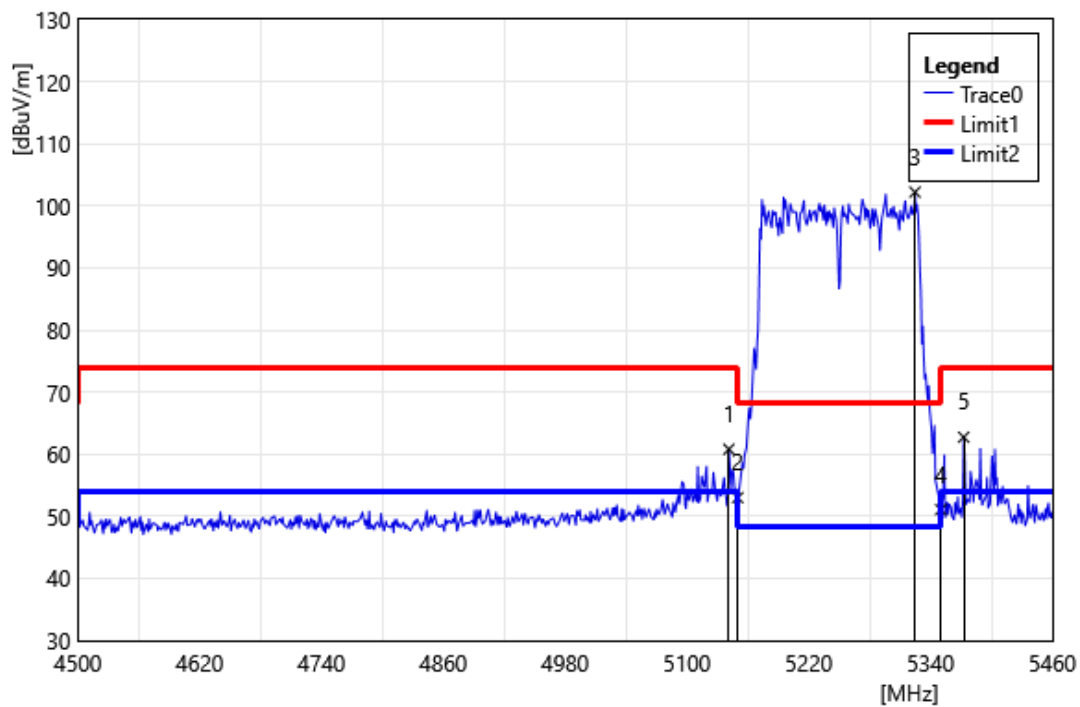


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5141.28	61.71	-0.90	60.81	74.00	-13.19	PEAK
2	5150.00	53.92	-0.91	53.02	74.00	-20.98	PEAK
3	5324.64	103.69	-1.47	102.22	68.20	34.02	PEAK
4	5350.00	52.37	-1.29	51.08	74.00	-22.92	PEAK
5	5372.64	63.87	-1.13	62.74	74.00	-11.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

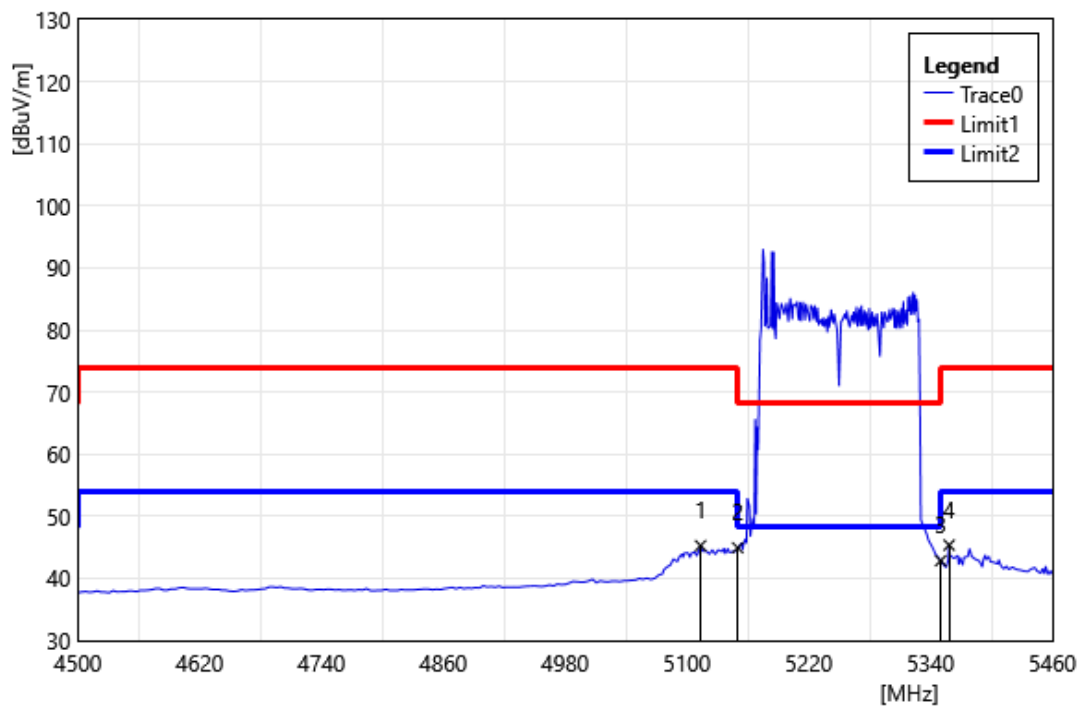


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5113.44	46.15	-0.87	45.28	54.00	-8.72	AVG
2	5150.00	45.86	-0.91	44.95	54.00	-9.05	AVG
3	5350.00	44.15	-1.29	42.86	54.00	-11.14	AVG
4	5358.24	46.60	-1.23	45.37	54.00	-8.64	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

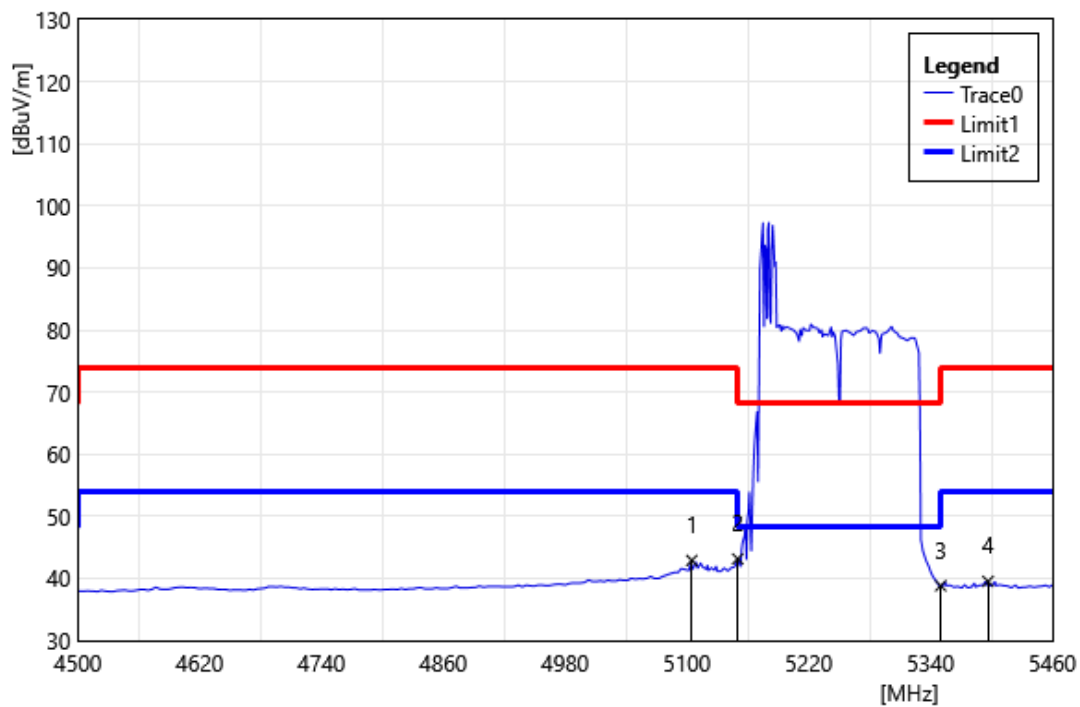


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5104.80	43.77	-0.87	42.90	54.00	-11.10	AVG
2	5150.00	44.05	-0.91	43.14	54.00	-10.86	AVG
3	5350.00	40.12	-1.29	38.83	54.00	-15.17	AVG
4	5396.64	40.49	-0.96	39.53	54.00	-14.47	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

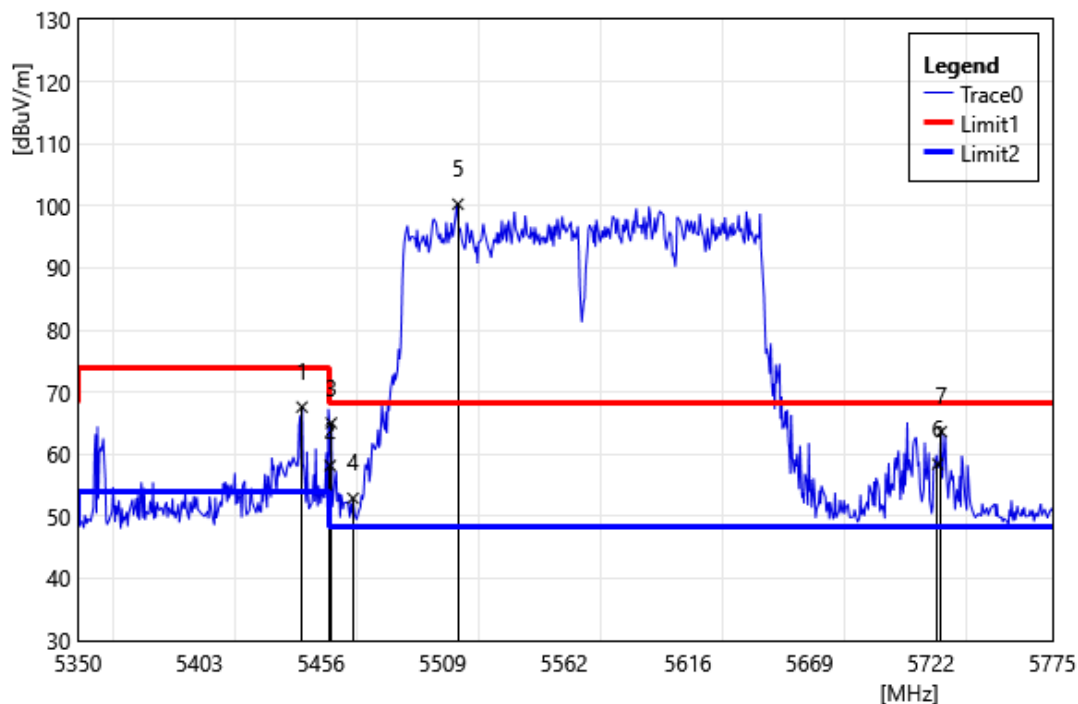


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.75	68.20	-0.60	67.60	74.00	-6.40	PEAK
2	5460.00	58.75	-0.57	58.18	74.00	-15.82	PEAK
3	5460.50	65.58	-0.57	65.02	68.20	-3.19	PEAK
4	5470.00	53.48	-0.56	52.92	68.20	-15.28	PEAK
5	5515.75	100.80	-0.52	100.28	68.20	32.08	PEAK
6	5725.00	58.77	-0.34	58.43	68.20	-9.77	PEAK
7	5726.55	63.96	-0.33	63.63	68.20	-4.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

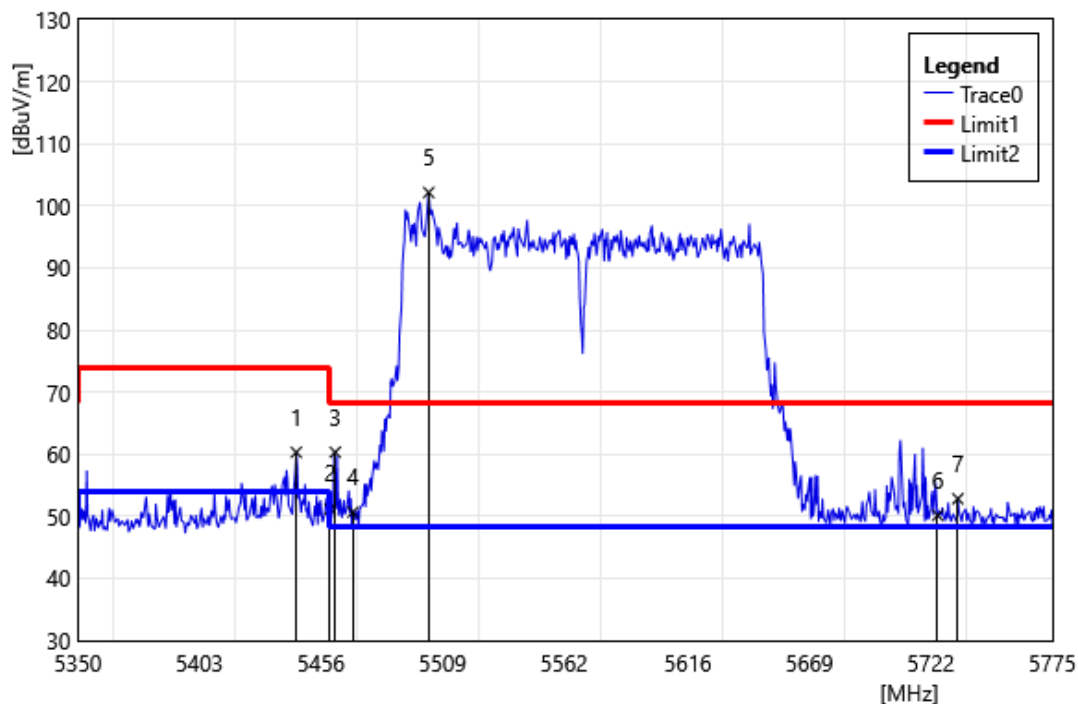


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5445.20	60.94	-0.62	60.32	74.00	-13.68	PEAK
2	5460.00	51.76	-0.57	51.19	74.00	-22.81	PEAK
3	5462.20	60.89	-0.57	60.32	68.20	-7.88	PEAK
4	5470.00	51.26	-0.56	50.70	68.20	-17.50	PEAK
5	5503.00	102.69	-0.53	102.16	68.20	33.96	PEAK
6	5725.00	50.50	-0.34	50.16	68.20	-18.04	PEAK
7	5733.78	53.09	-0.25	52.84	68.20	-15.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

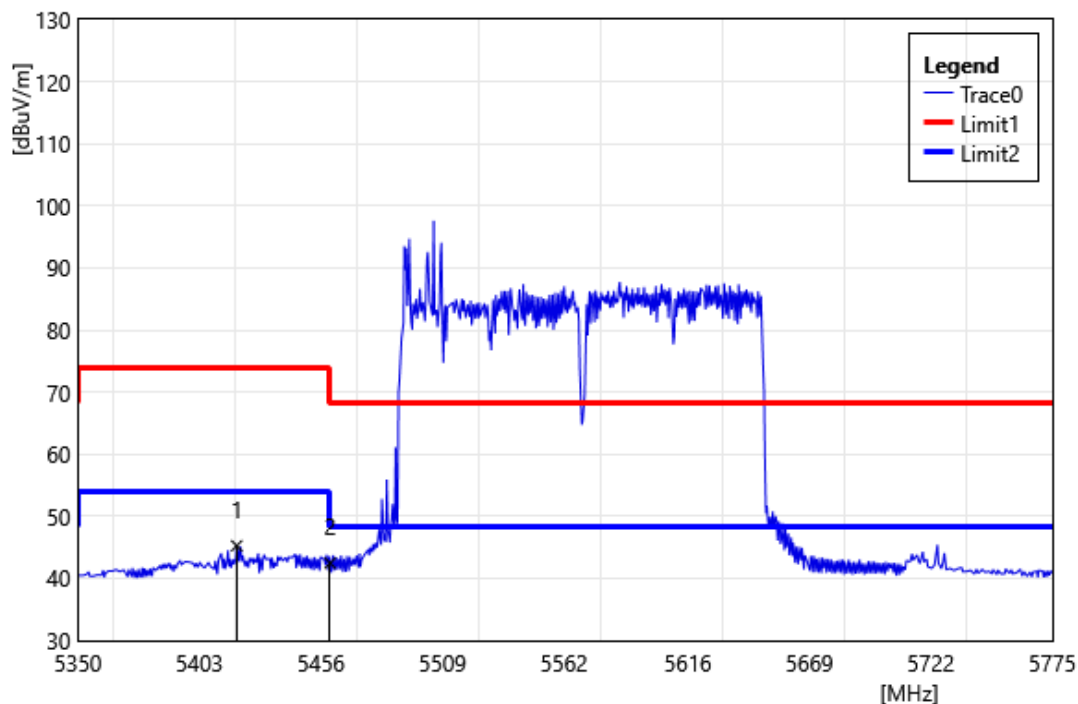


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5419.28	46.06	-0.80	45.26	54.00	-8.74	AVG
2	5460.00	43.04	-0.57	42.47	54.00	-11.53	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

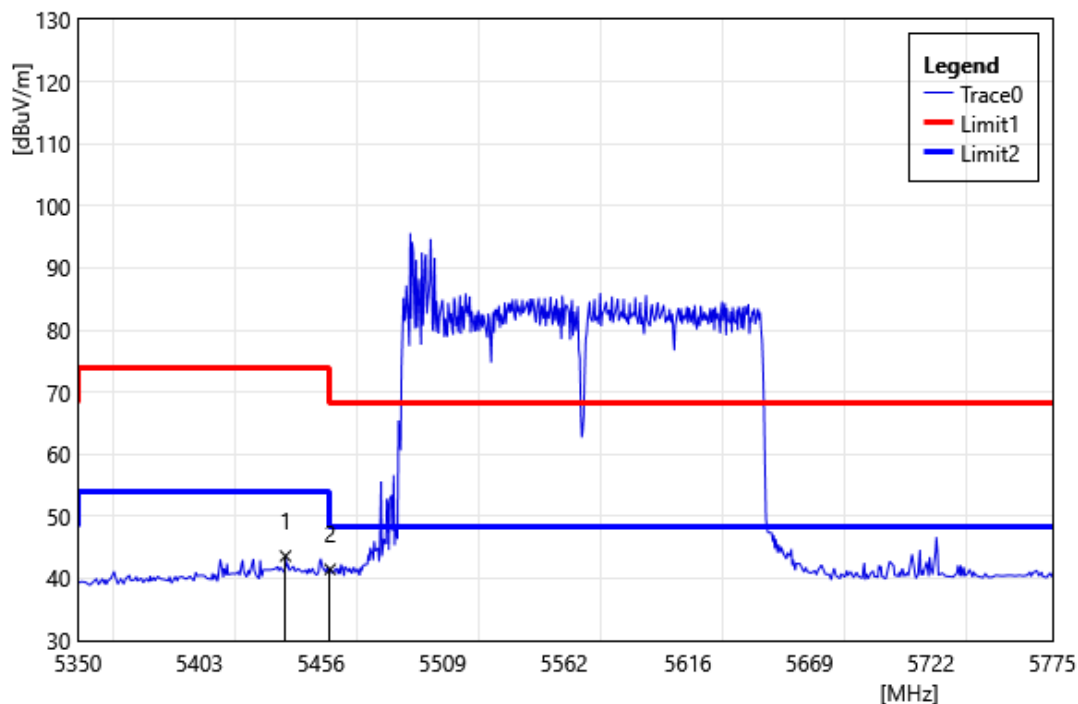


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5440.53	44.26	-0.65	43.61	54.00	-10.39	AVG
2	5460.00	42.04	-0.57	41.47	54.00	-12.53	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

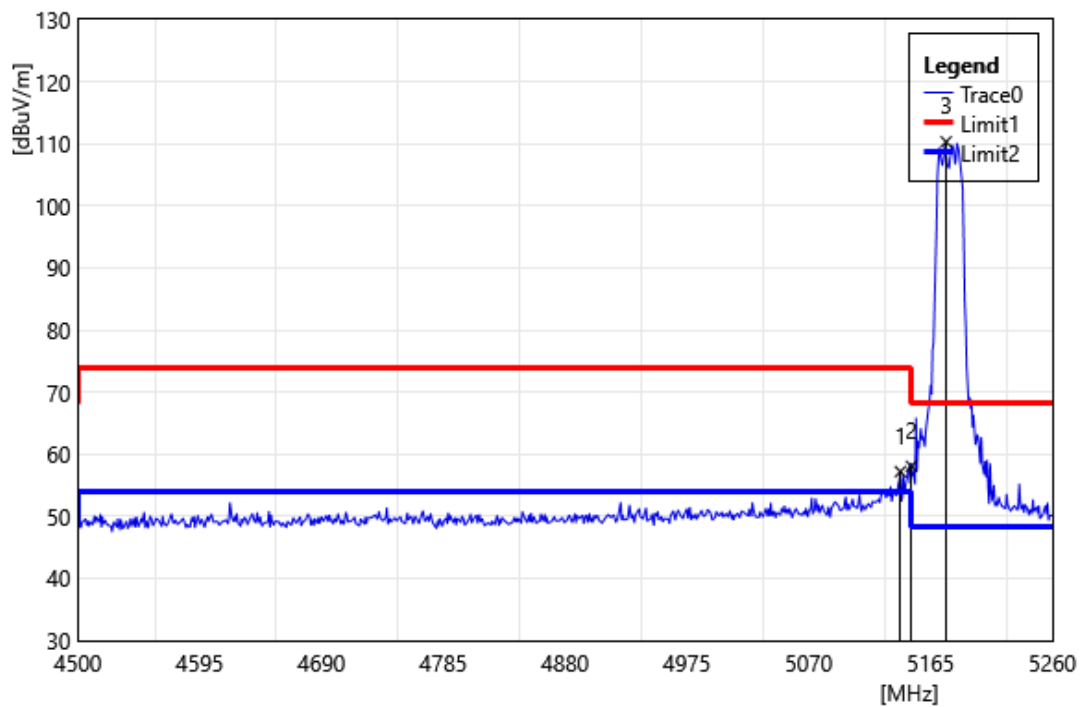


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5141.44	58.10	-0.90	57.20	74.00	-16.81	PEAK
2	5150.00	58.97	-0.91	58.06	74.00	-15.94	PEAK
3	5177.16	111.35	-1.04	110.31	68.20	42.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

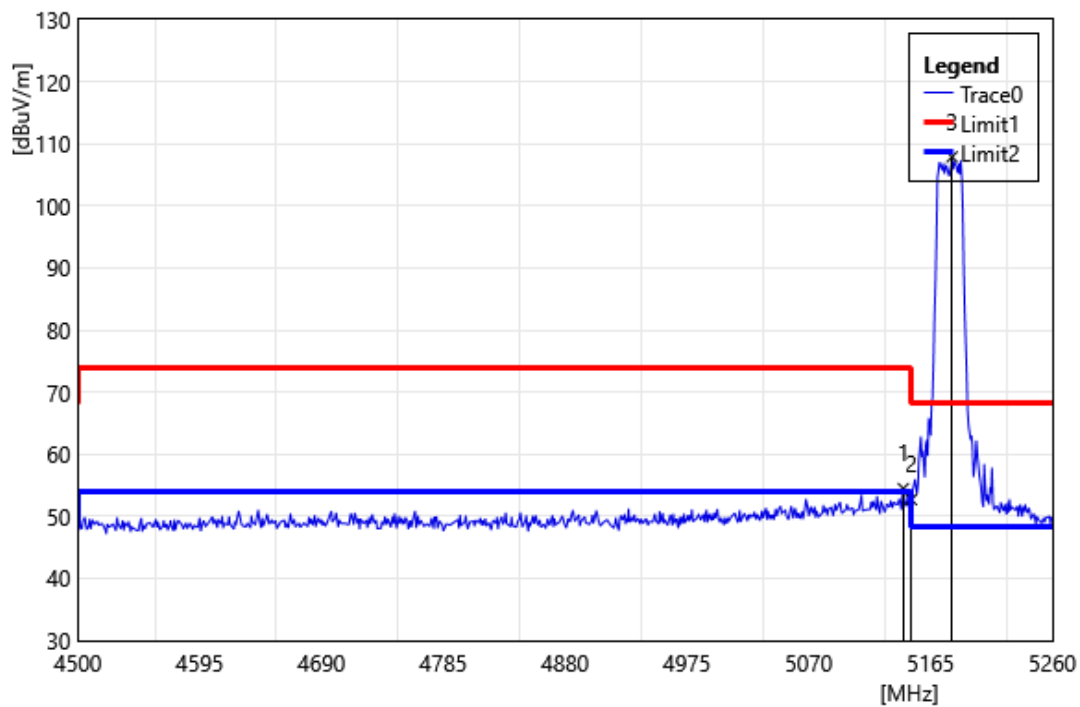


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	55.36	-0.90	54.47	74.00	-19.54	PEAK
2	5150.00	53.61	-0.91	52.70	74.00	-21.30	PEAK
3	5181.72	108.95	-1.06	107.89	68.20	39.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

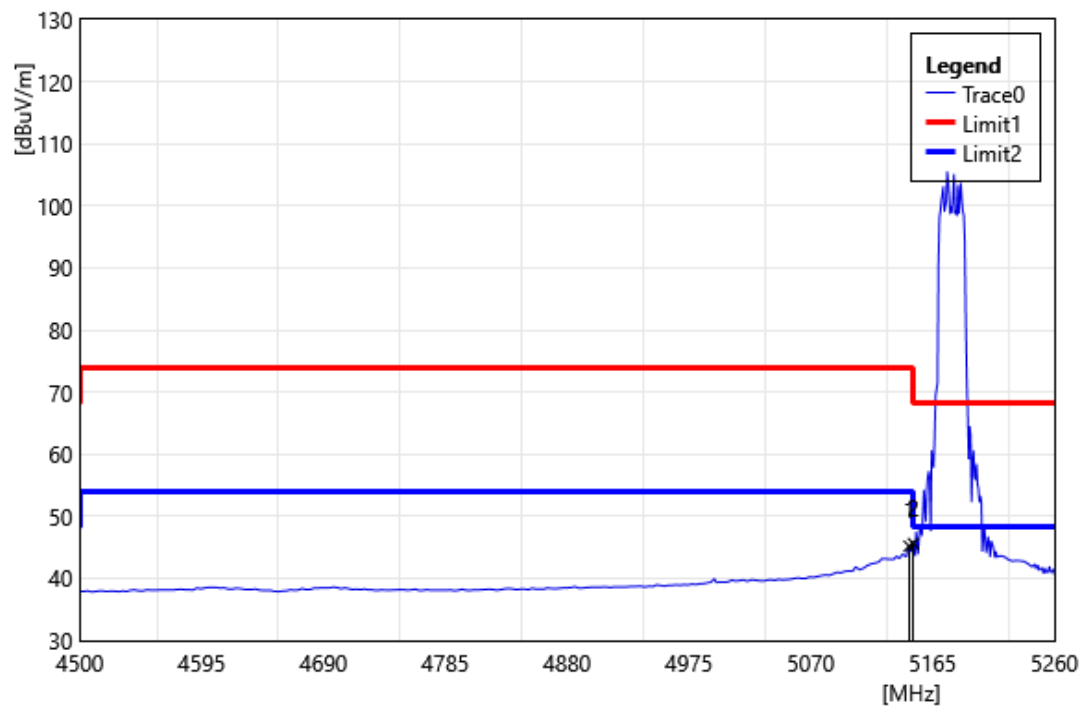


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	46.09	-0.90	45.19	54.00	-8.81	AVG
2	5150.00	46.51	-0.91	45.60	54.00	-8.40	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

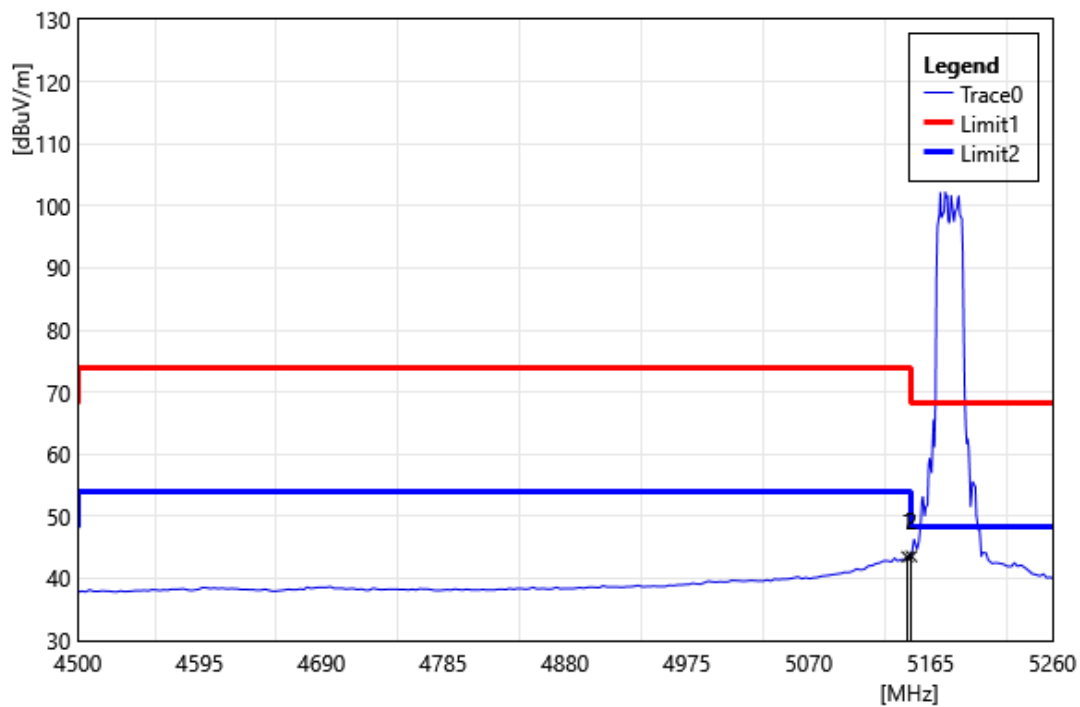


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	44.38	-0.90	43.48	54.00	-10.52	AVG
2	5150.00	44.46	-0.91	43.55	54.00	-10.45	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

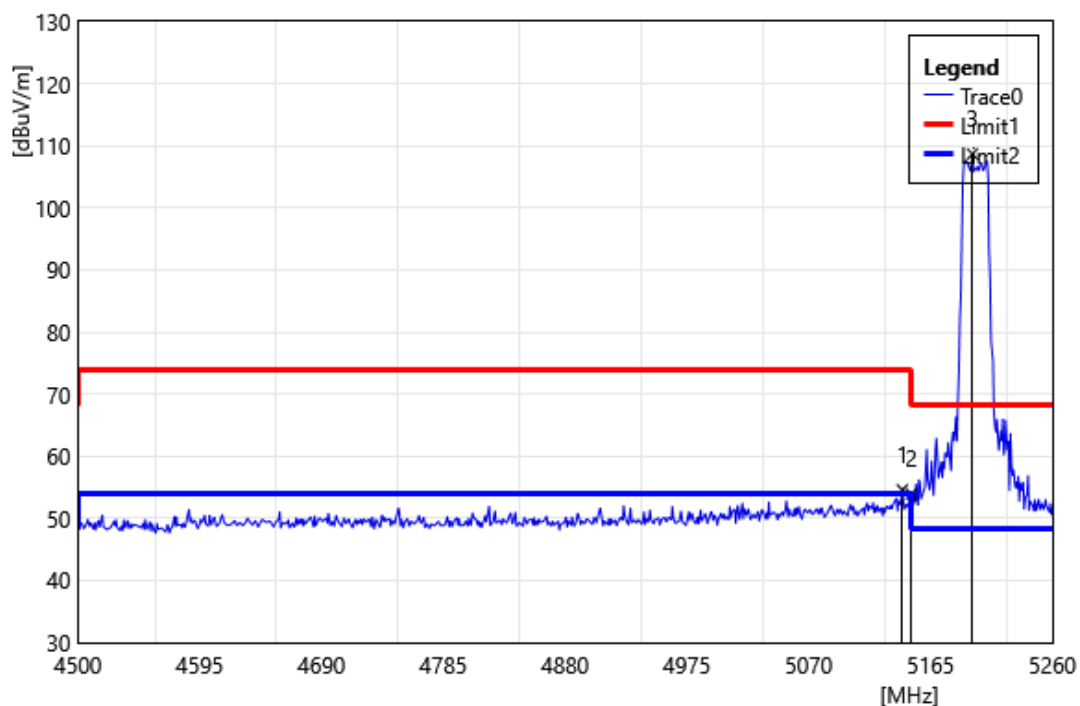


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	55.49	-0.90	54.59	74.00	-19.41	PEAK
2	5150.00	54.83	-0.91	53.92	74.00	-20.08	PEAK
3	5197.68	109.81	-1.14	108.67	68.20	40.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

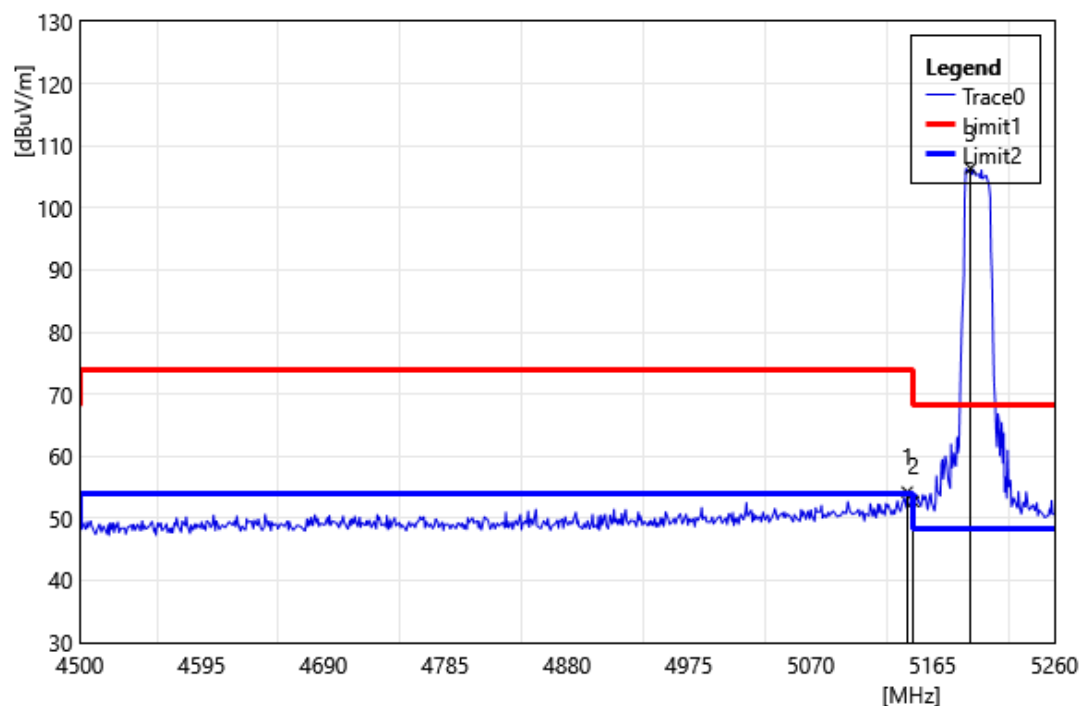


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	55.12	-0.90	54.22	74.00	-19.78	PEAK
2	5150.00	53.62	-0.91	52.71	74.00	-21.29	PEAK
3	5194.64	107.49	-1.13	106.36	68.20	38.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

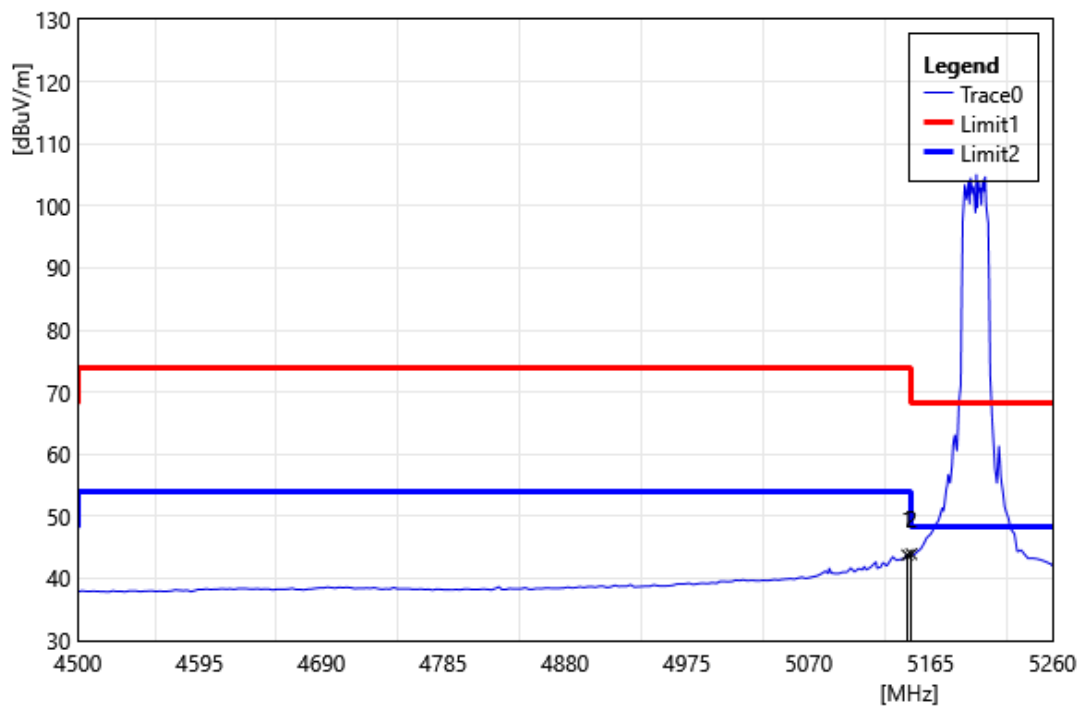


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	44.67	-0.90	43.77	54.00	-10.23	AVG
2	5150.00	44.83	-0.91	43.93	54.00	-10.07	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

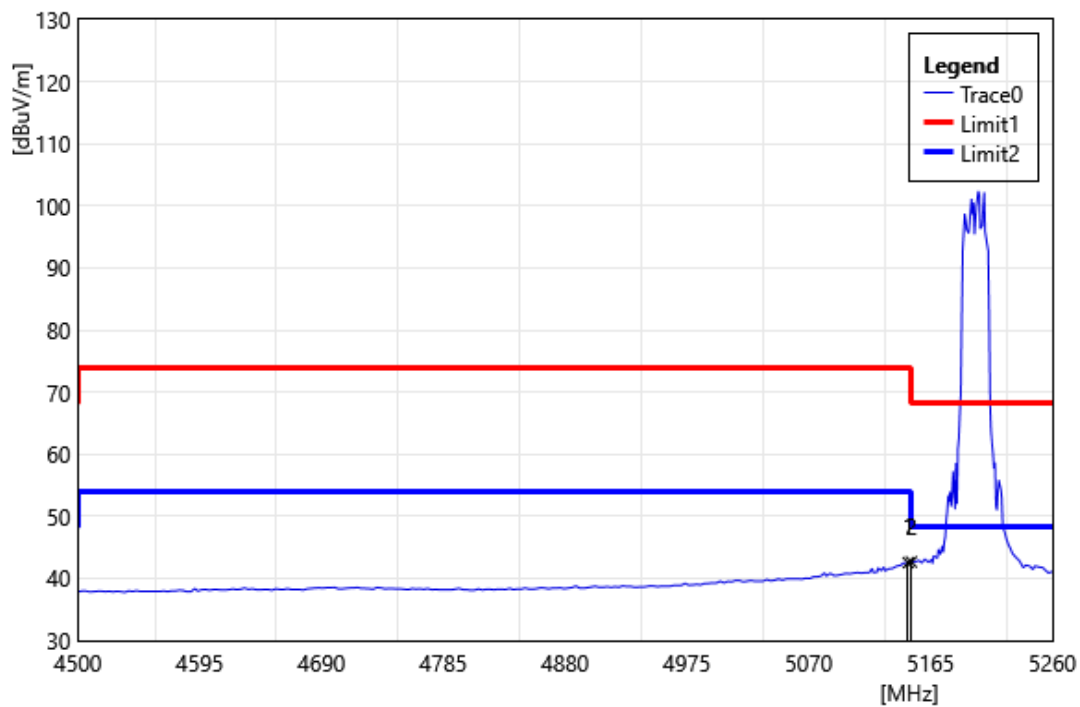


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	43.46	-0.91	42.55	54.00	-11.46	AVG
2	5150.00	43.57	-0.91	42.66	54.00	-11.34	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

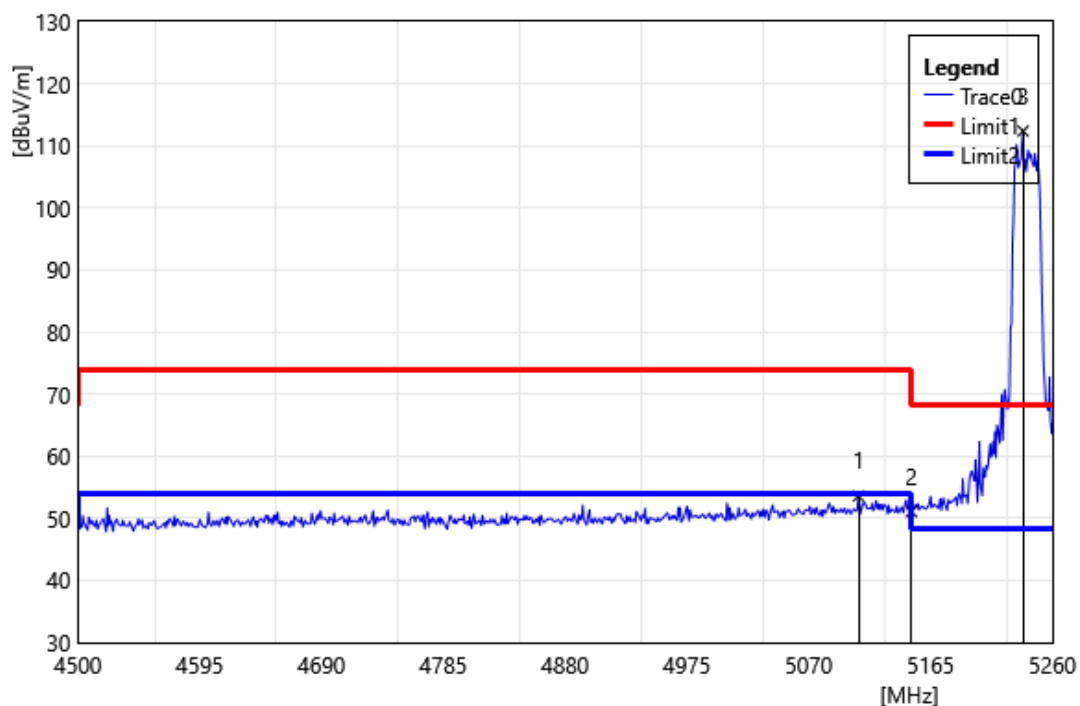


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5108.76	54.48	-0.87	53.61	74.00	-20.39	PEAK
2	5150.00	51.99	-0.91	51.08	74.00	-22.92	PEAK
3	5237.20	113.78	-1.41	112.37	68.20	44.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

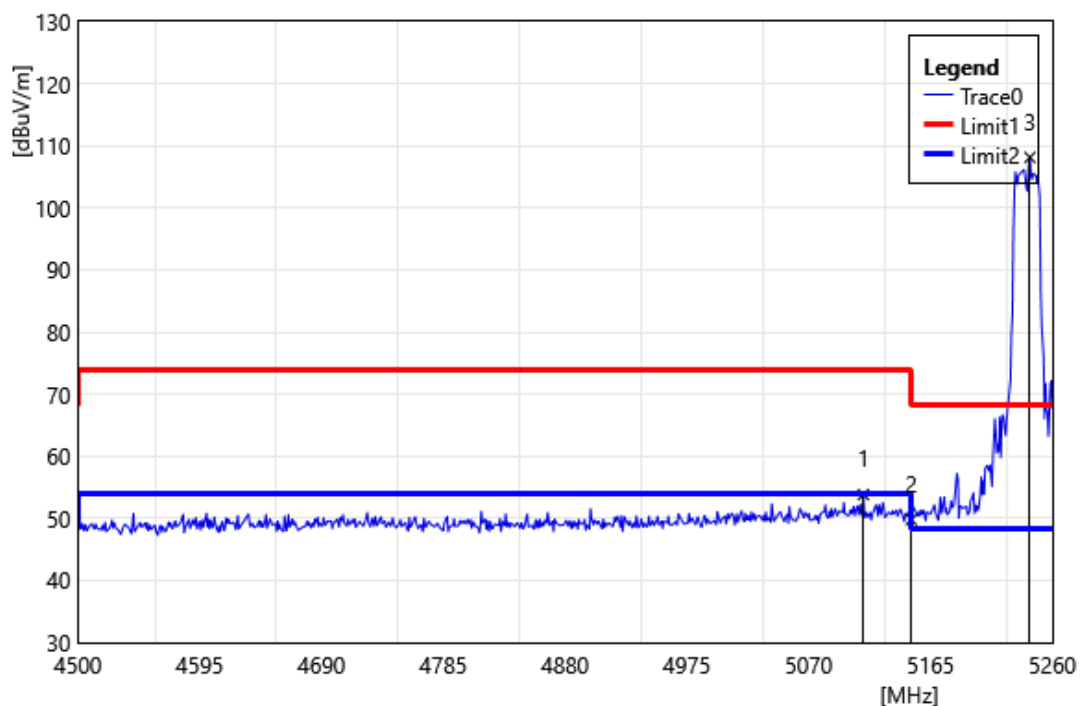


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5112.56	54.69	-0.87	53.82	74.00	-20.18	PEAK
2	5150.00	50.71	-0.91	49.80	74.00	-24.20	PEAK
3	5242.52	109.57	-1.45	108.12	68.20	39.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

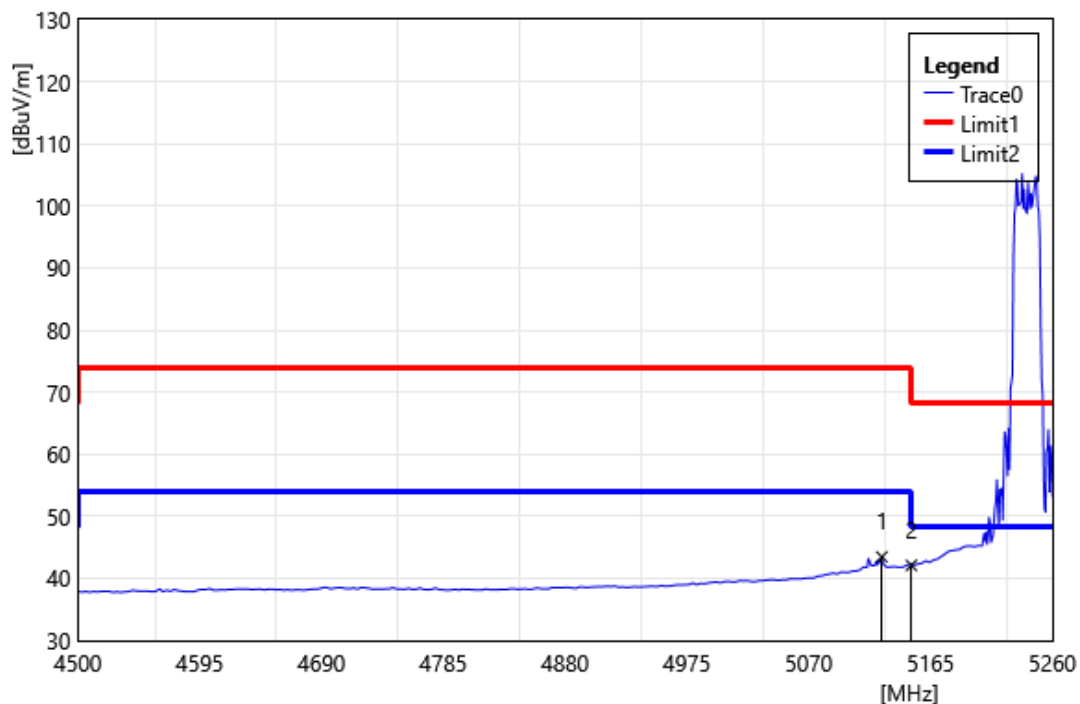


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5127.00	44.37	-0.89	43.48	54.00	-10.52	AVG
2	5150.00	43.01	-0.91	42.11	54.00	-11.89	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

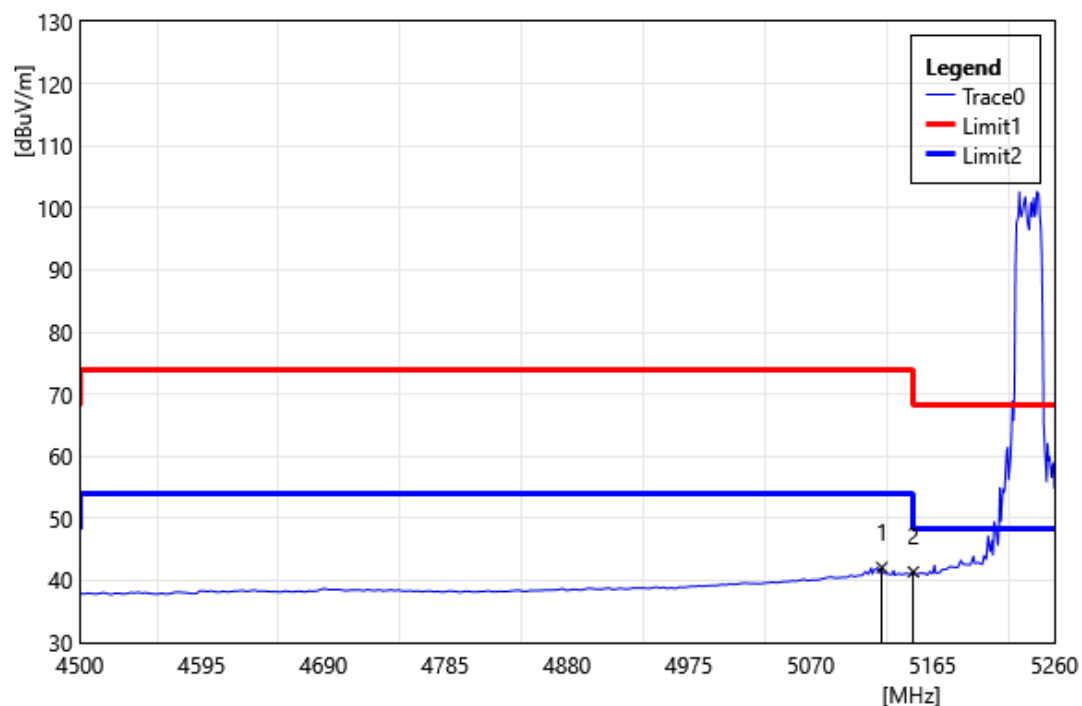


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5125.48	42.98	-0.89	42.09	54.00	-11.91	AVG
2	5150.00	42.28	-0.91	41.37	54.00	-12.63	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

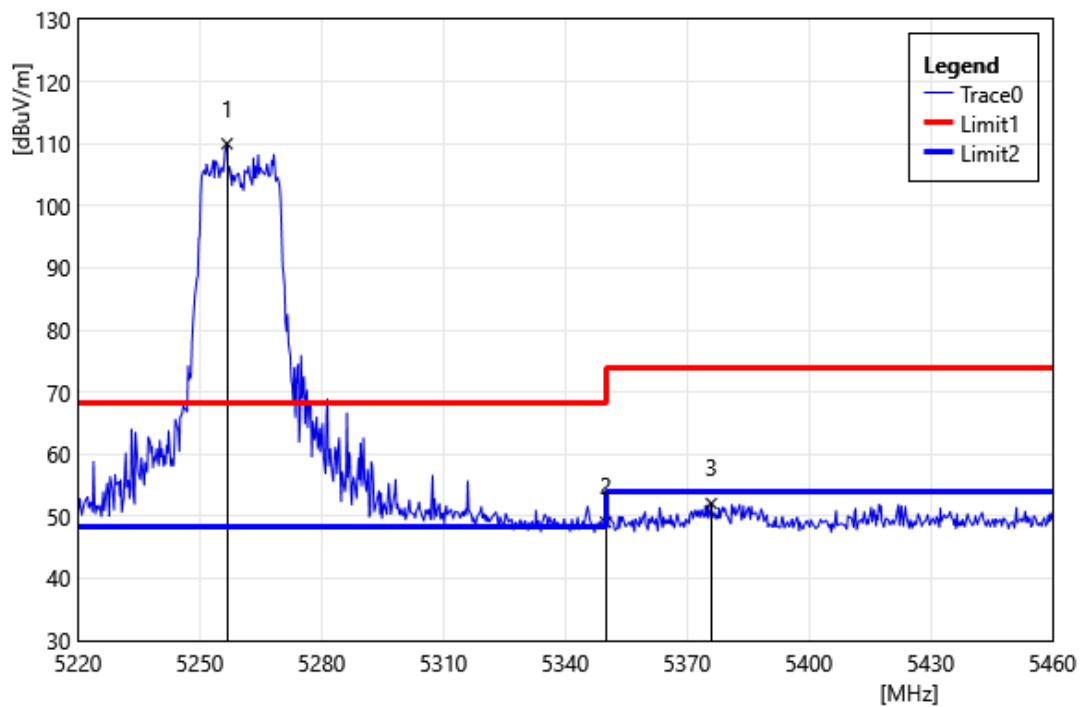


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5256.72	111.52	-1.52	110.00	68.20	41.80	PEAK
2	5350.00	50.32	-1.29	49.03	74.00	-24.97	PEAK
3	5376.00	53.18	-1.11	52.07	74.00	-21.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

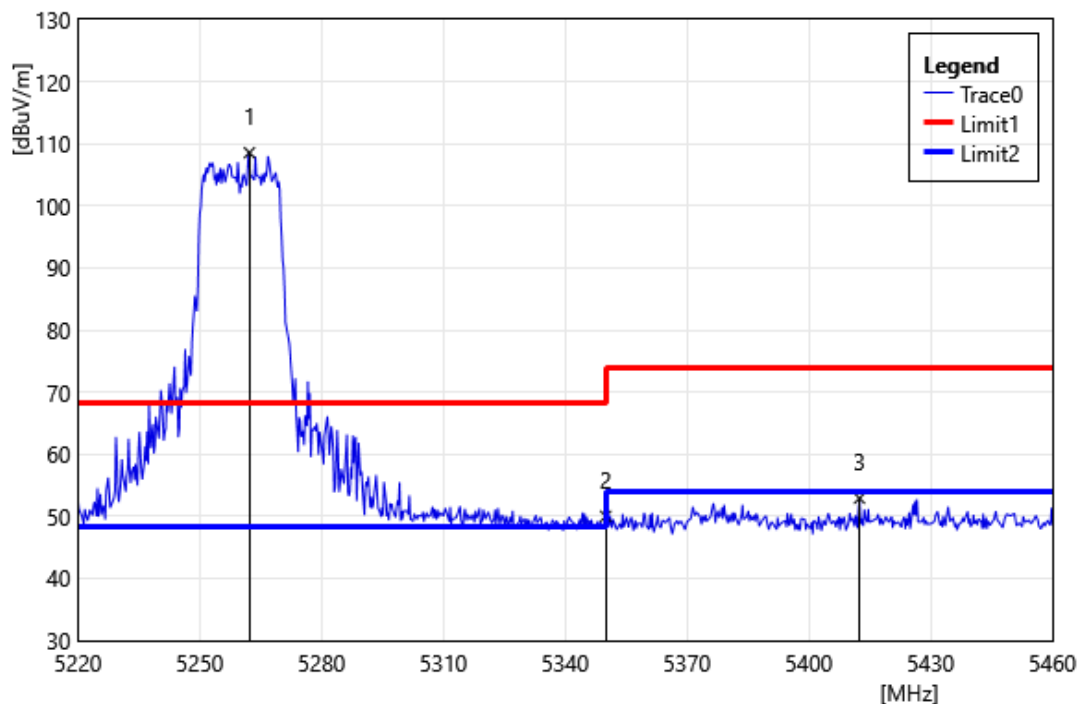


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5262.24	110.10	-1.54	108.56	68.20	40.36	PEAK
2	5350.00	51.32	-1.29	50.03	74.00	-23.97	PEAK
3	5412.48	53.77	-0.85	52.92	74.00	-21.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

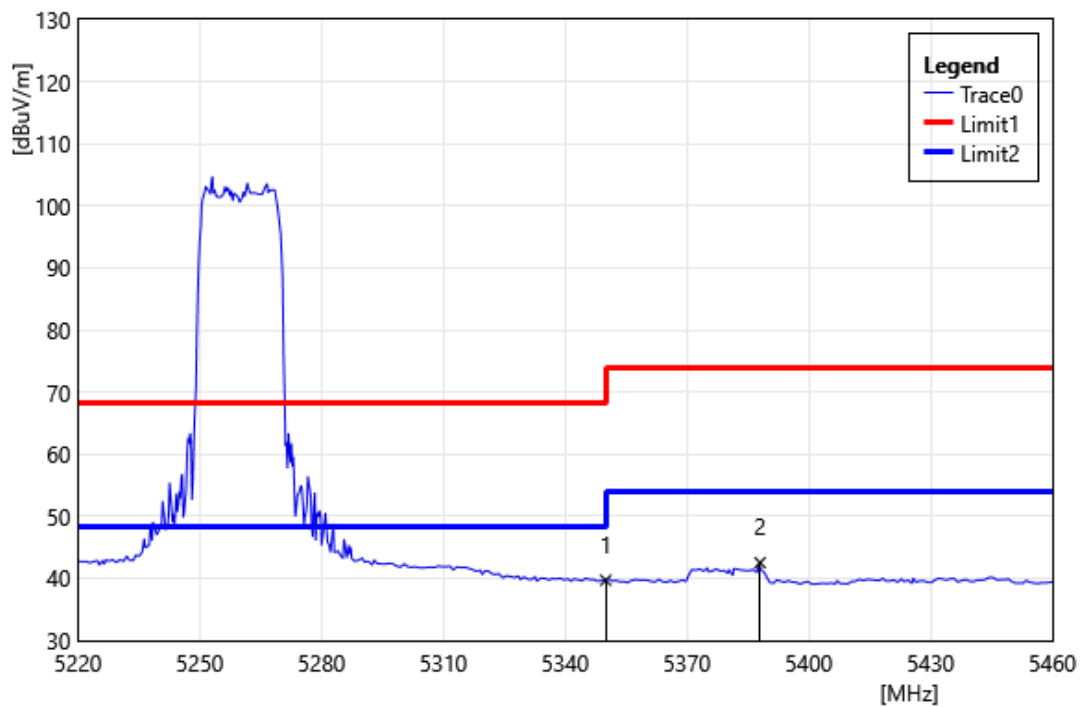


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.02	-1.29	39.72	54.00	-14.28	AVG
2	5388.00	43.56	-1.02	42.54	54.00	-11.46	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

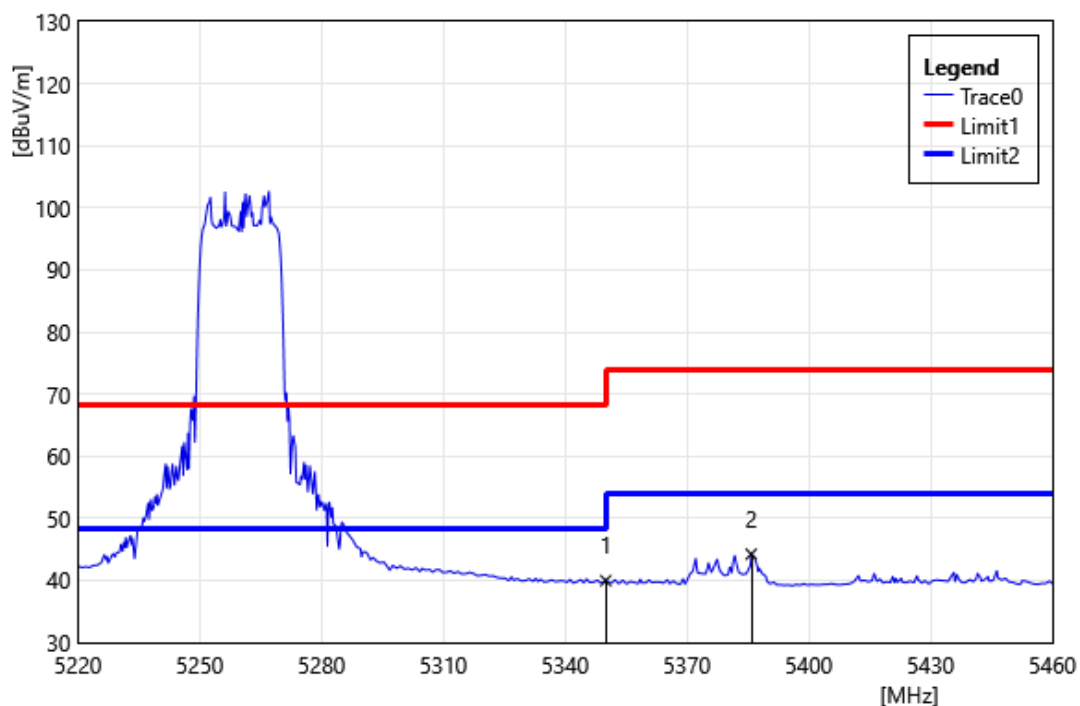


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.27	-1.29	39.97	54.00	-14.03	AVG
2	5385.84	45.27	-1.04	44.23	54.00	-9.77	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

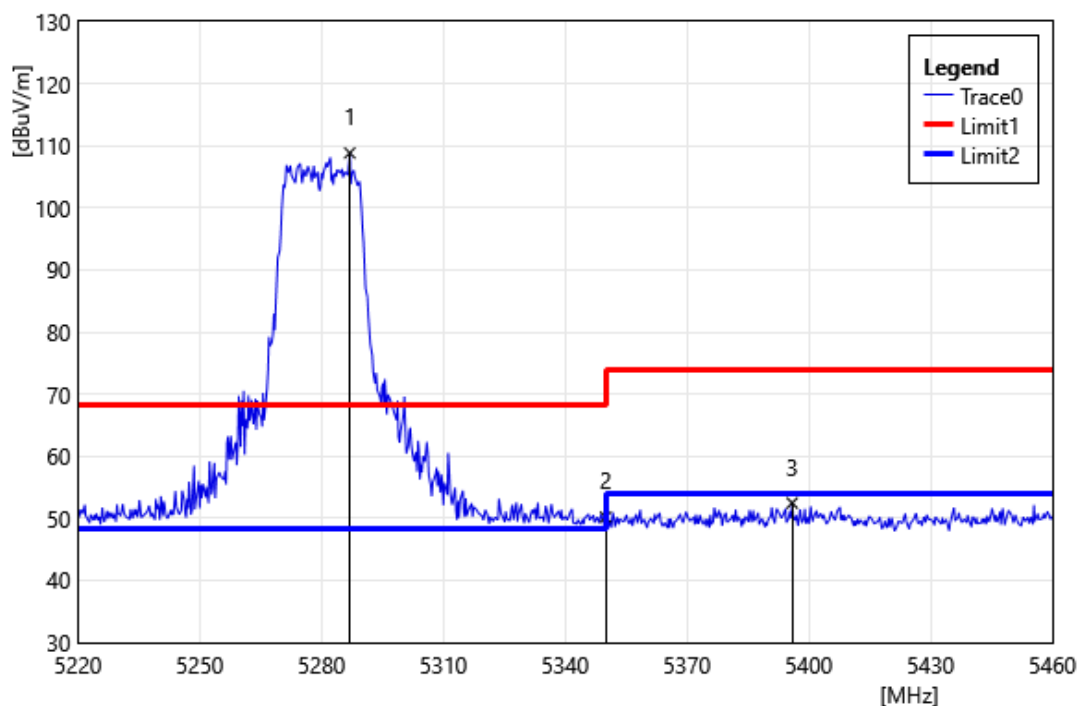


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5286.96	110.45	-1.61	108.84	68.20	40.64	PEAK
2	5350.00	51.51	-1.29	50.22	74.00	-23.78	PEAK
3	5395.92	53.44	-0.97	52.47	74.00	-21.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

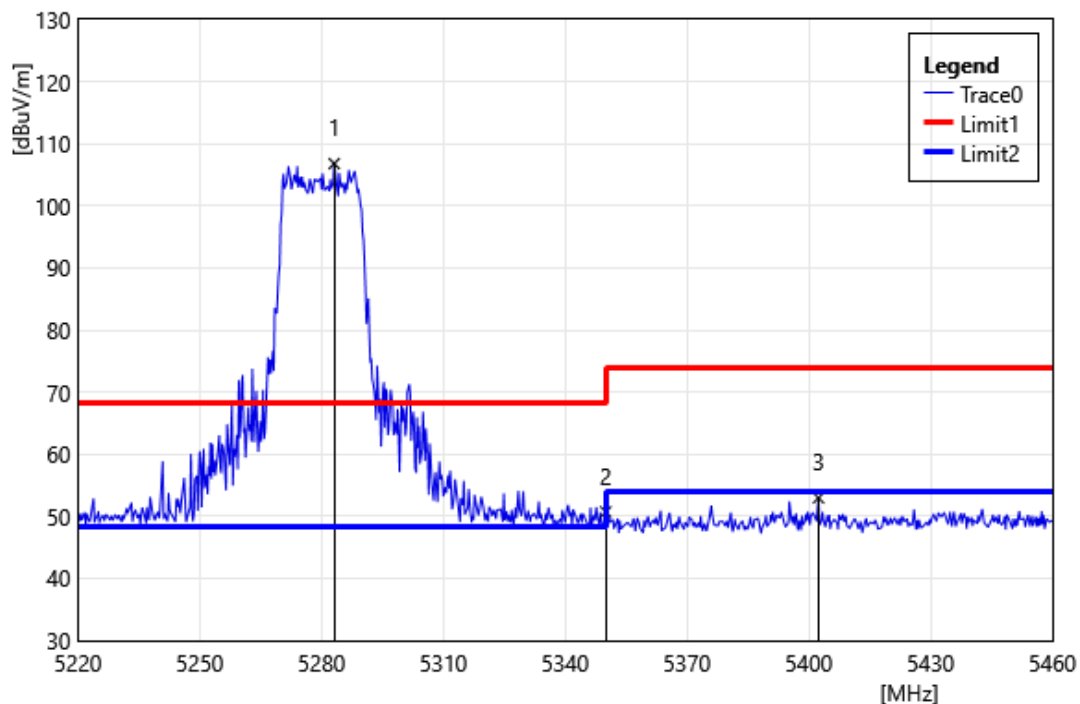


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5283.12	108.41	-1.60	106.81	68.20	38.61	PEAK
2	5350.00	52.02	-1.29	50.73	74.00	-23.27	PEAK
3	5402.40	53.89	-0.92	52.97	74.00	-21.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

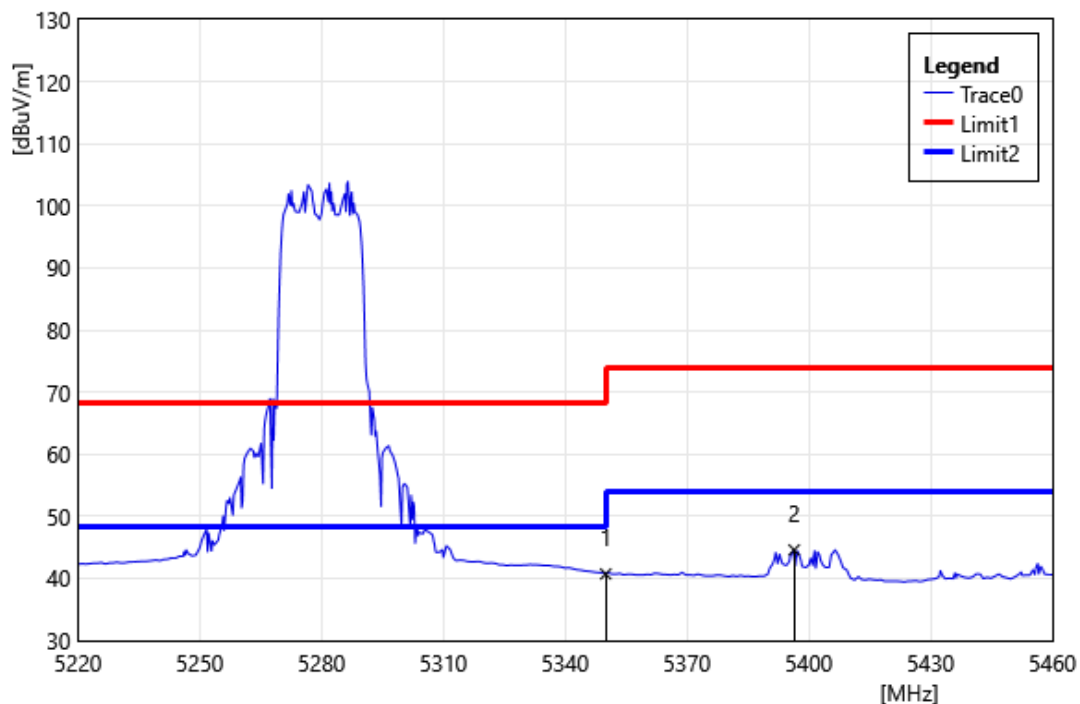


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	42.01	-1.29	40.72	54.00	-13.28	AVG
2	5396.40	45.56	-0.96	44.60	54.00	-9.40	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

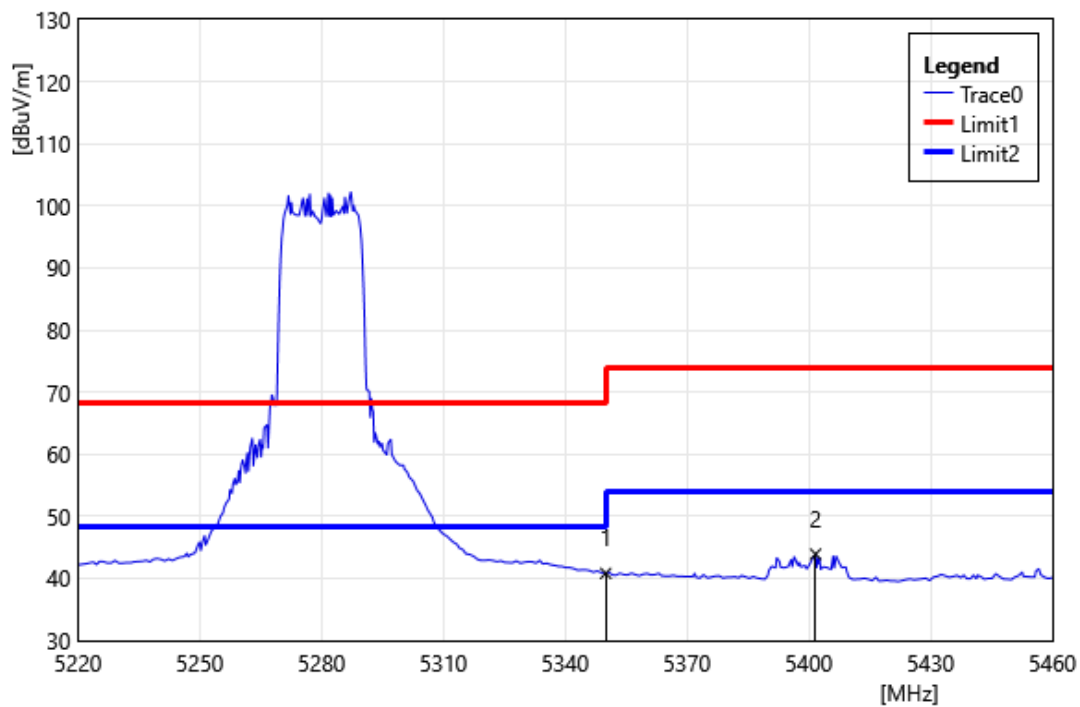

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	42.12	-1.29	40.82	54.00	-13.18	AVG
2	5401.68	44.83	-0.93	43.90	54.00	-10.10	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

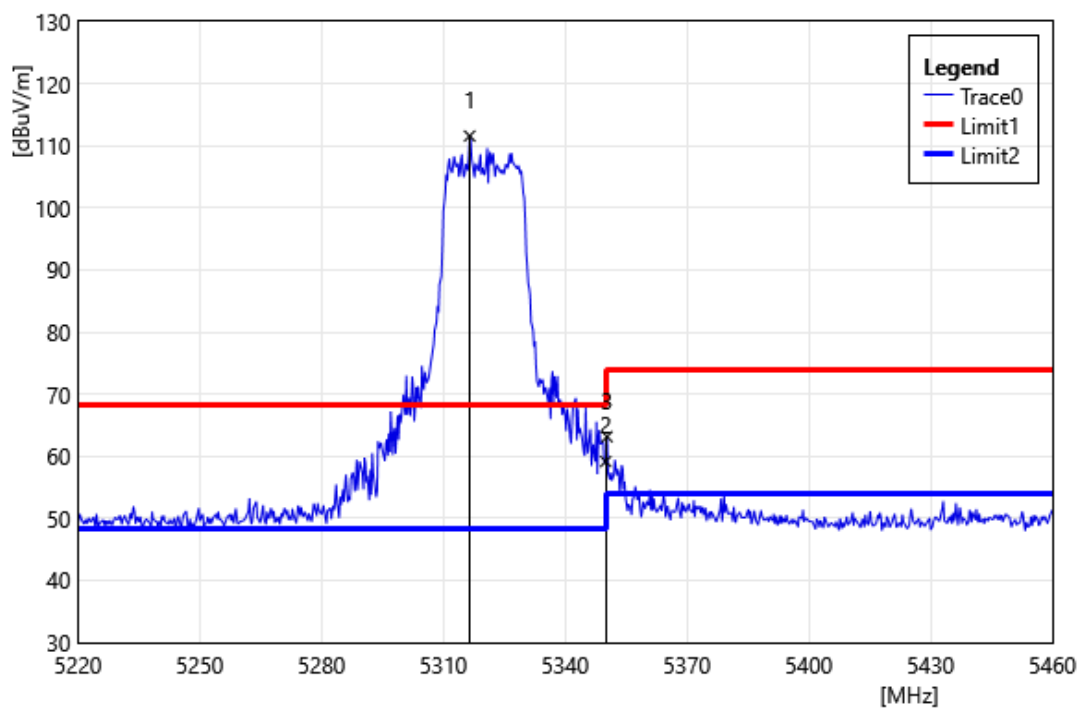

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5316.48	113.10	-1.53	111.57	68.20	43.37	PEAK
2	5350.00	60.45	-1.29	59.15	74.00	-14.85	PEAK
3	5350.32	64.44	-1.29	63.15	74.00	-10.85	PEAK