



Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

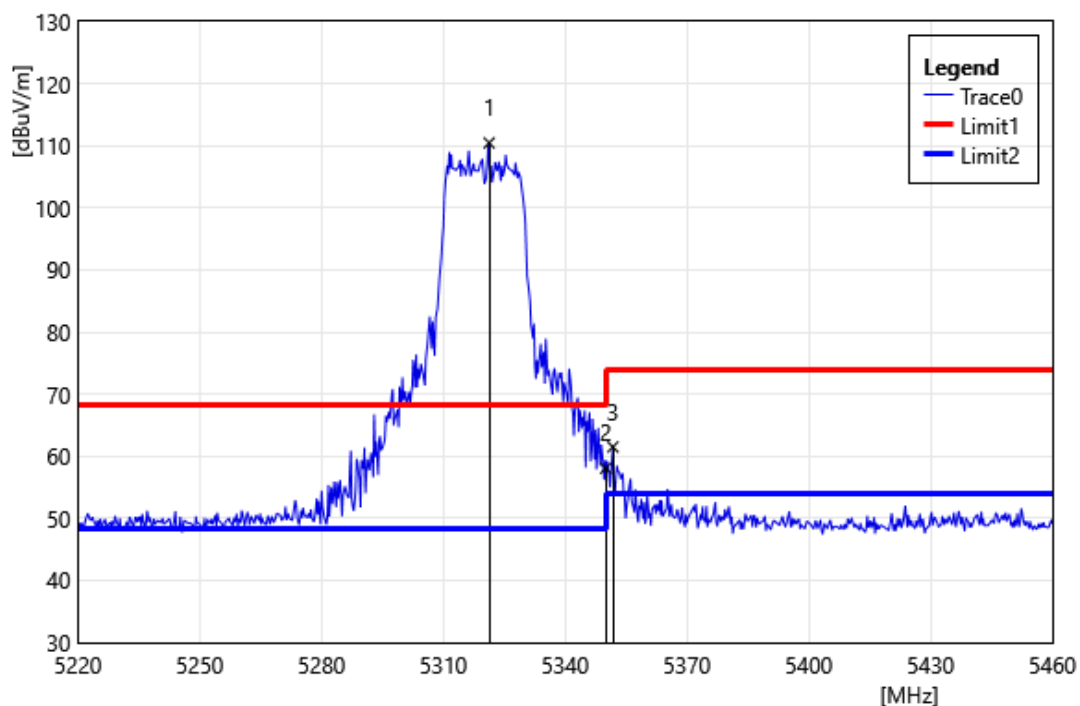


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5321.28	111.95	-1.50	110.45	68.20	42.25	PEAK
2	5350.00	59.37	-1.29	58.08	74.00	-15.92	PEAK
3	5351.76	62.78	-1.28	61.50	74.00	-12.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

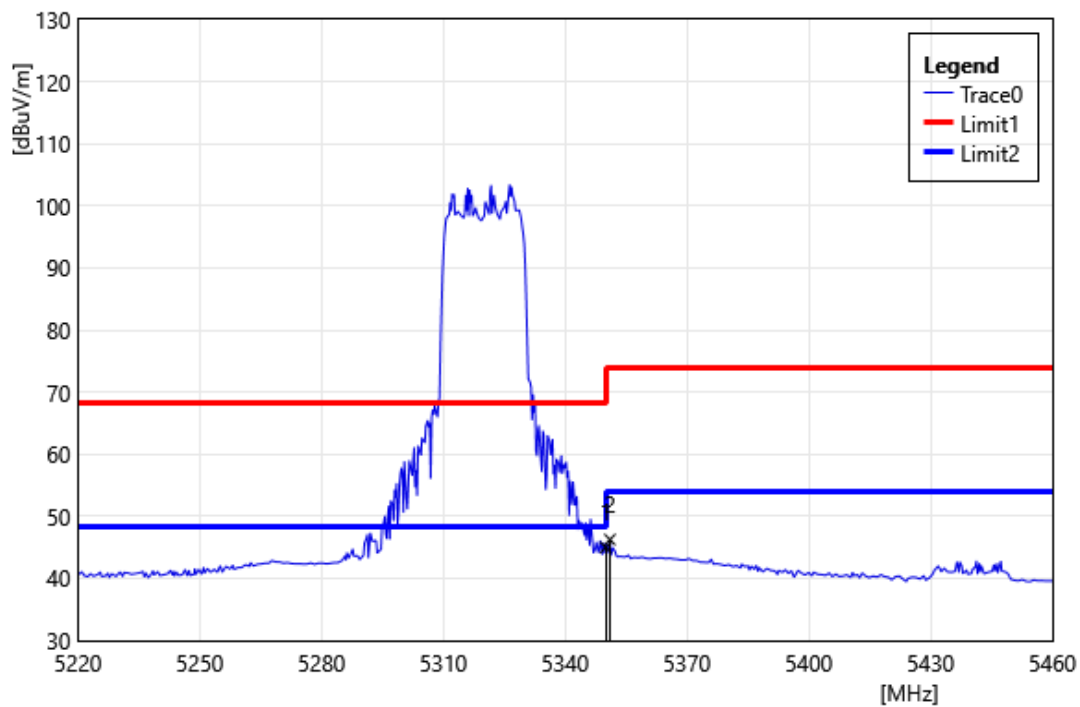


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	46.29	-1.29	45.00	54.00	-9.00	AVG
2	5351.04	47.54	-1.28	46.26	54.00	-7.74	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5320 MHz		
Polarization:	Horizontal		
Remark:			

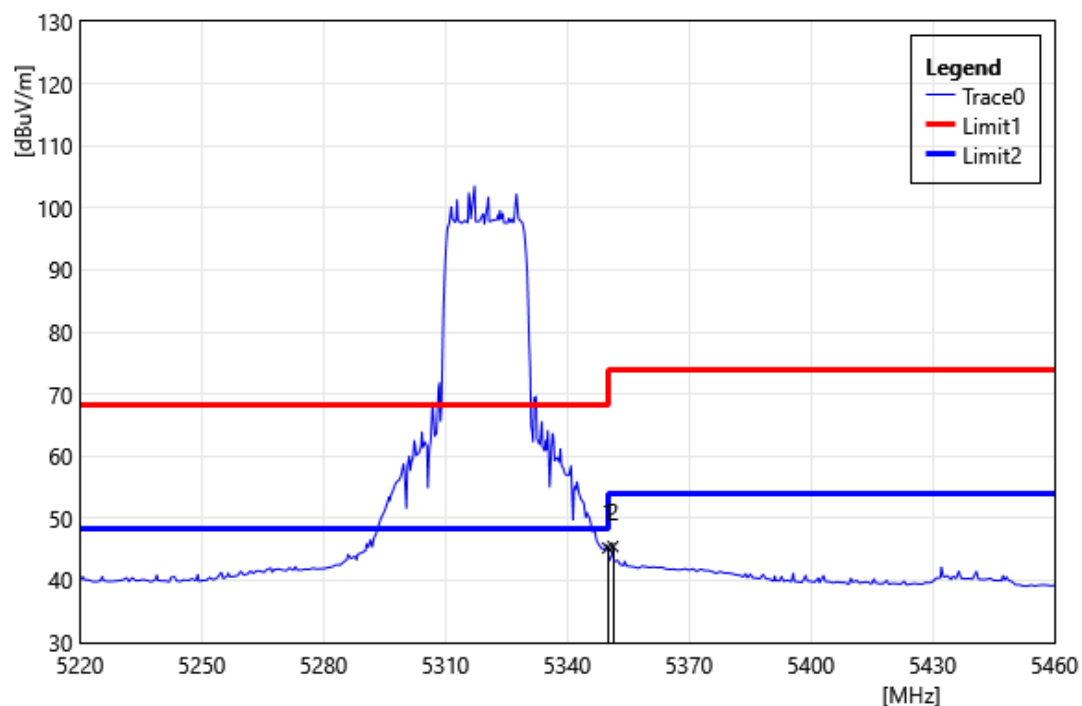


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	46.52	-1.29	45.23	54.00	-8.77	AVG
2	5351.28	46.72	-1.28	45.45	54.00	-8.56	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

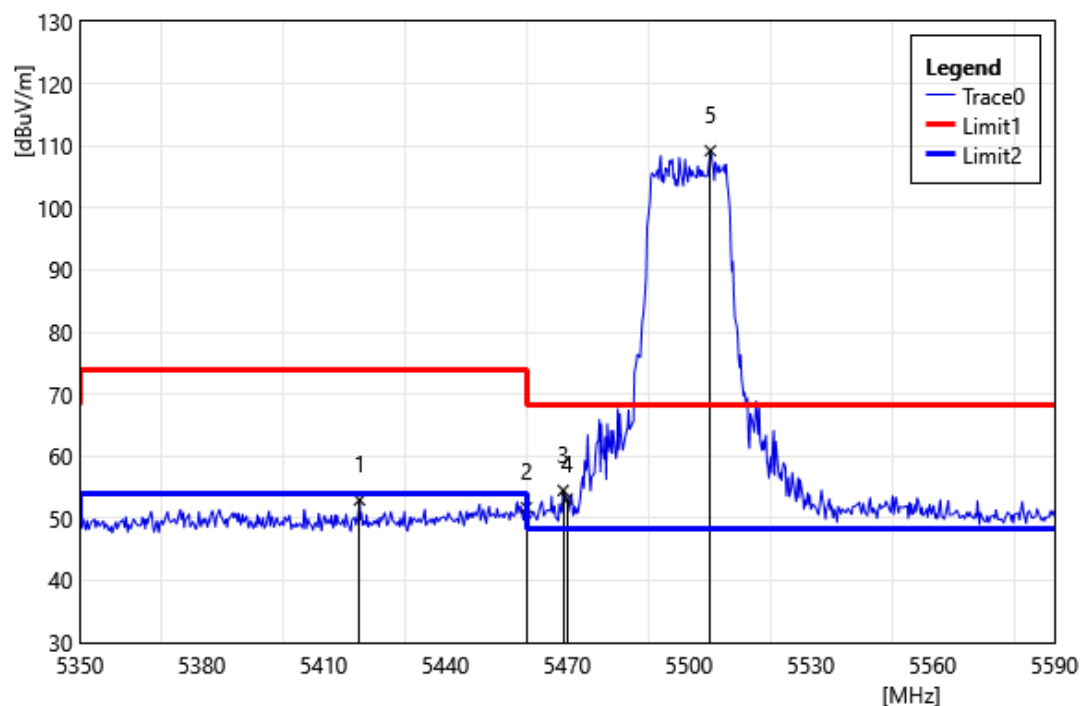


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5418.88	53.75	-0.80	52.95	74.00	-21.05	PEAK
2	5460.00	52.29	-0.57	51.72	74.00	-22.28	PEAK
3	5469.04	55.06	-0.56	54.50	68.20	-13.70	PEAK
4	5470.00	53.63	-0.56	53.07	68.20	-15.13	PEAK
5	5505.28	109.74	-0.53	109.22	68.20	41.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

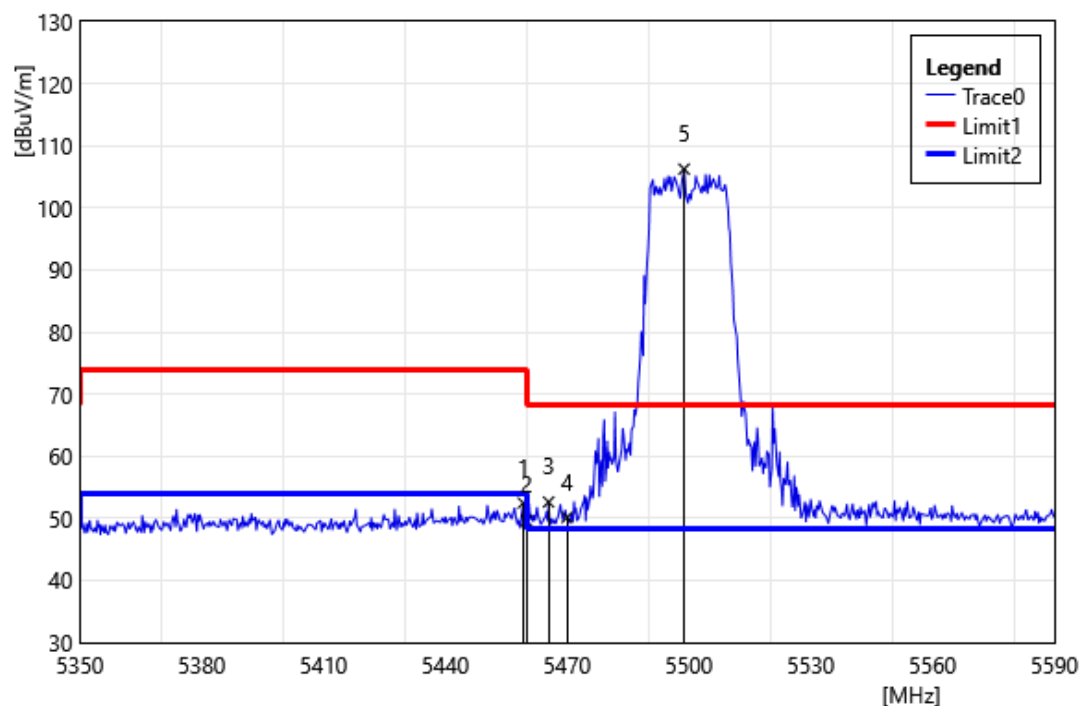


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	53.04	-0.57	52.47	74.00	-21.53	PEAK
2	5460.00	50.20	-0.57	49.63	74.00	-24.37	PEAK
3	5465.44	53.20	-0.57	52.63	68.20	-15.57	PEAK
4	5470.00	50.72	-0.56	50.16	68.20	-18.04	PEAK
5	5498.80	106.78	-0.53	106.25	68.20	38.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

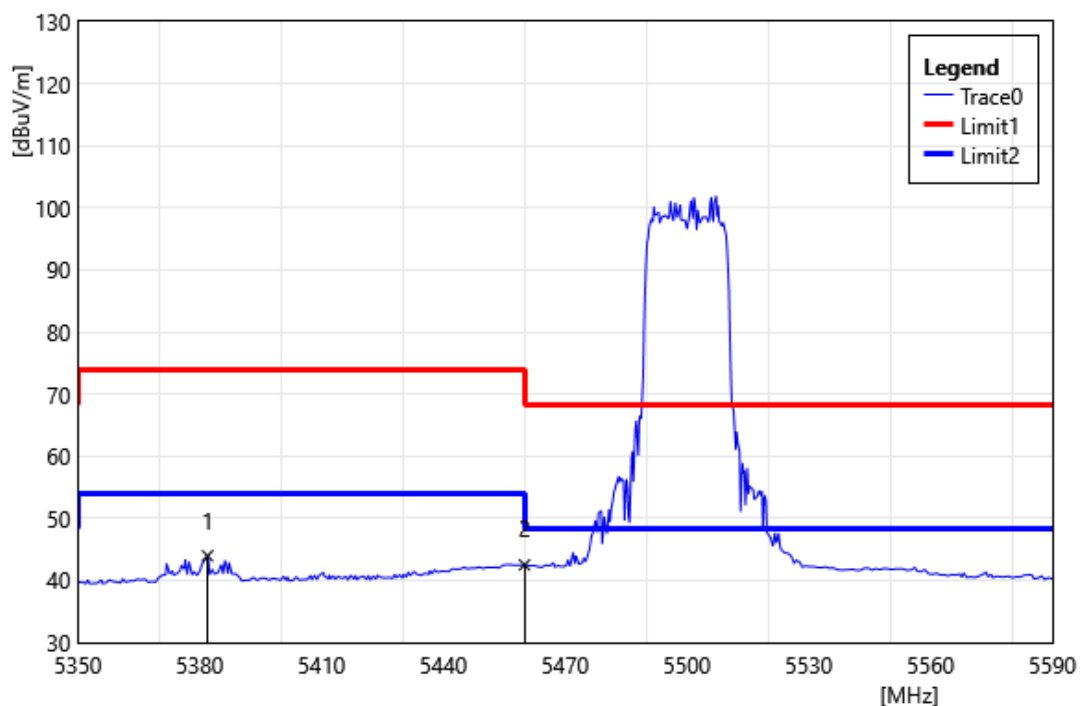


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5381.92	45.03	-1.07	43.96	54.00	-10.04	AVG
2	5460.00	43.09	-0.57	42.52	54.00	-11.48	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

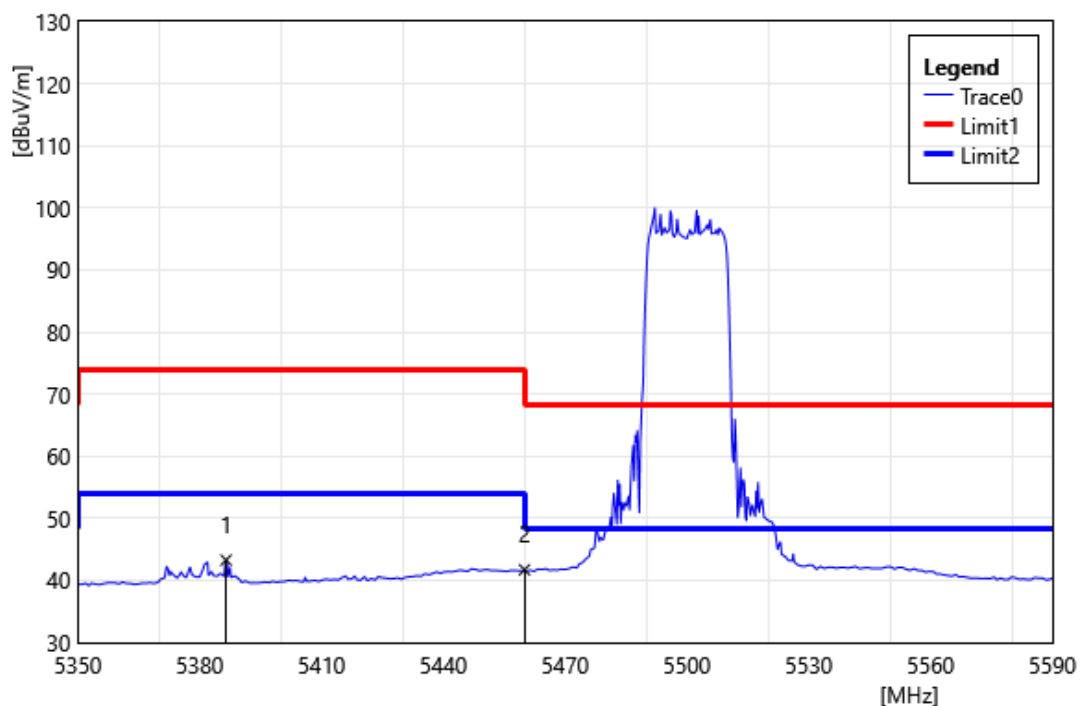


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5386.48	44.30	-1.03	43.27	54.00	-10.73	AVG
2	5460.00	42.28	-0.57	41.71	54.00	-12.29	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

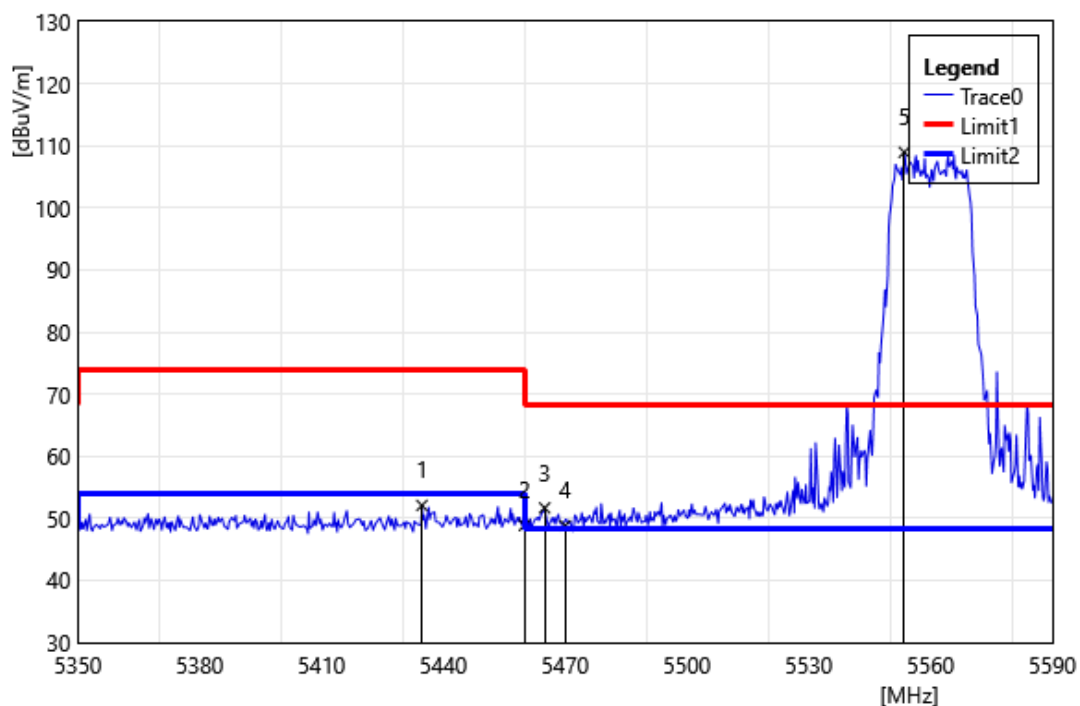


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5434.72	52.77	-0.69	52.08	74.00	-21.92	PEAK
2	5460.00	49.45	-0.57	48.88	74.00	-25.12	PEAK
3	5464.96	52.24	-0.57	51.67	68.20	-16.53	PEAK
4	5470.00	49.39	-0.56	48.83	68.20	-19.37	PEAK
5	5553.52	109.45	-0.50	108.95	68.20	40.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

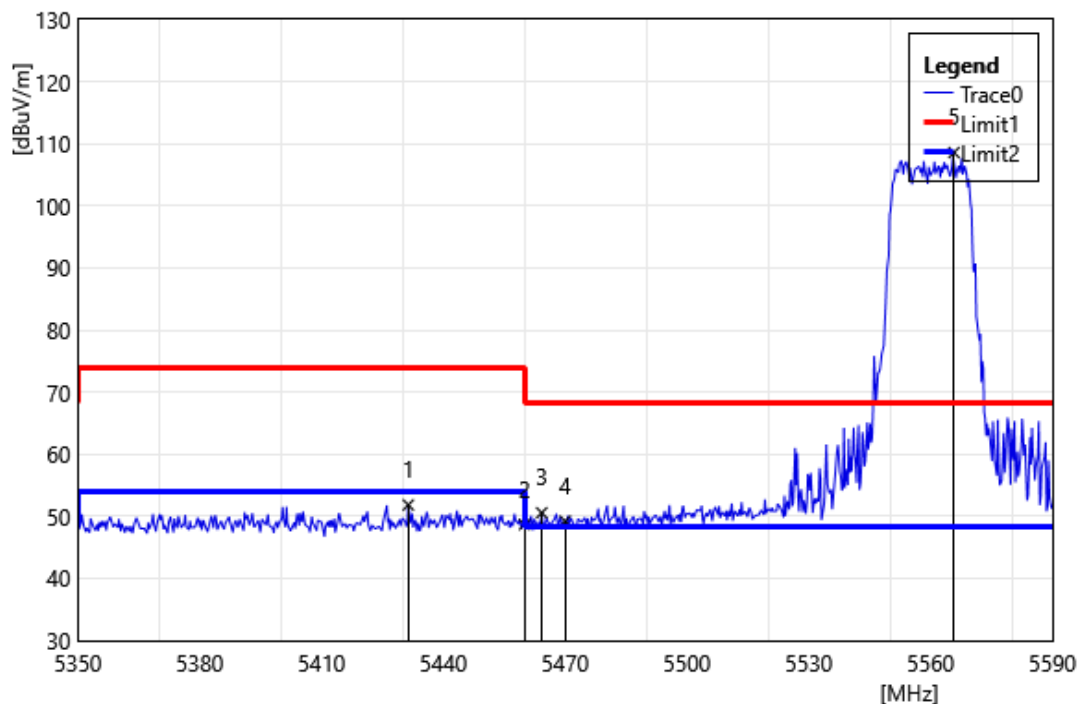


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5431.36	52.56	-0.72	51.84	74.00	-22.17	PEAK
2	5460.00	49.26	-0.57	48.69	74.00	-25.31	PEAK
3	5464.24	51.14	-0.57	50.57	68.20	-17.63	PEAK
4	5470.00	49.80	-0.56	49.24	68.20	-18.96	PEAK
5	5565.76	109.11	-0.52	108.59	68.20	40.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

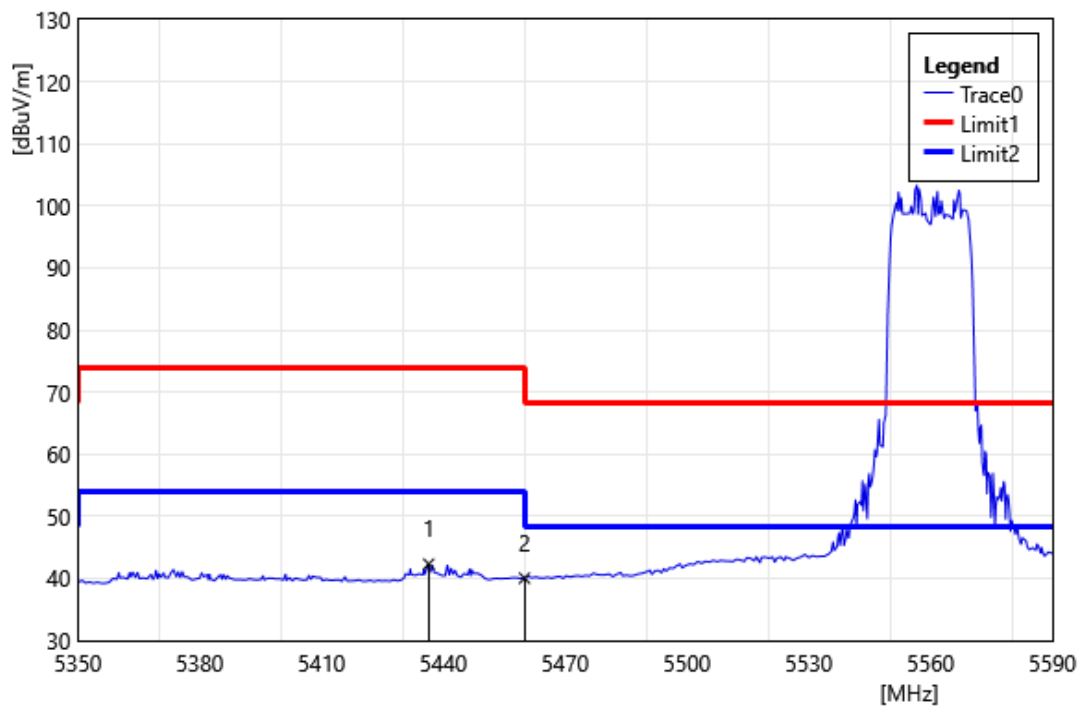


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5436.40	42.99	-0.68	42.31	54.00	-11.69	AVG
2	5460.00	40.60	-0.57	40.03	54.00	-13.97	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

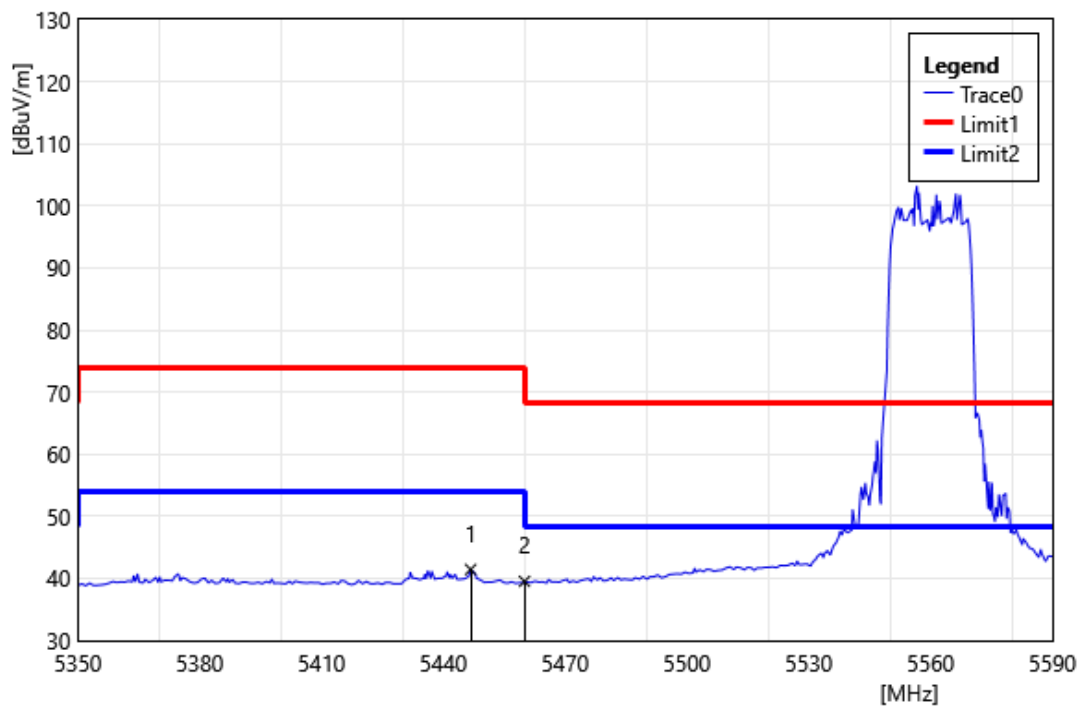


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5446.72	42.06	-0.61	41.45	54.00	-12.55	AVG
2	5460.00	40.10	-0.57	39.53	54.00	-14.47	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

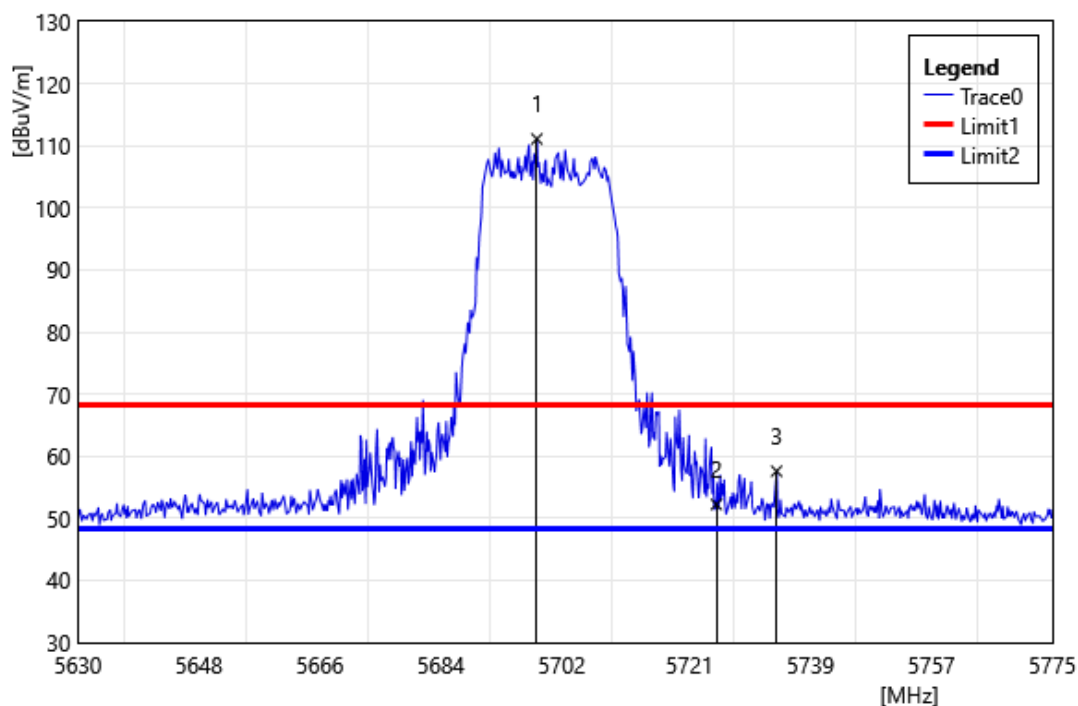


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5698.30	111.72	-0.61	111.12	68.20	42.92	PEAK
2	5725.00	52.59	-0.34	52.25	68.20	-15.95	PEAK
3	5733.97	57.84	-0.25	57.59	68.20	-10.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Horizontal		
Remark:			

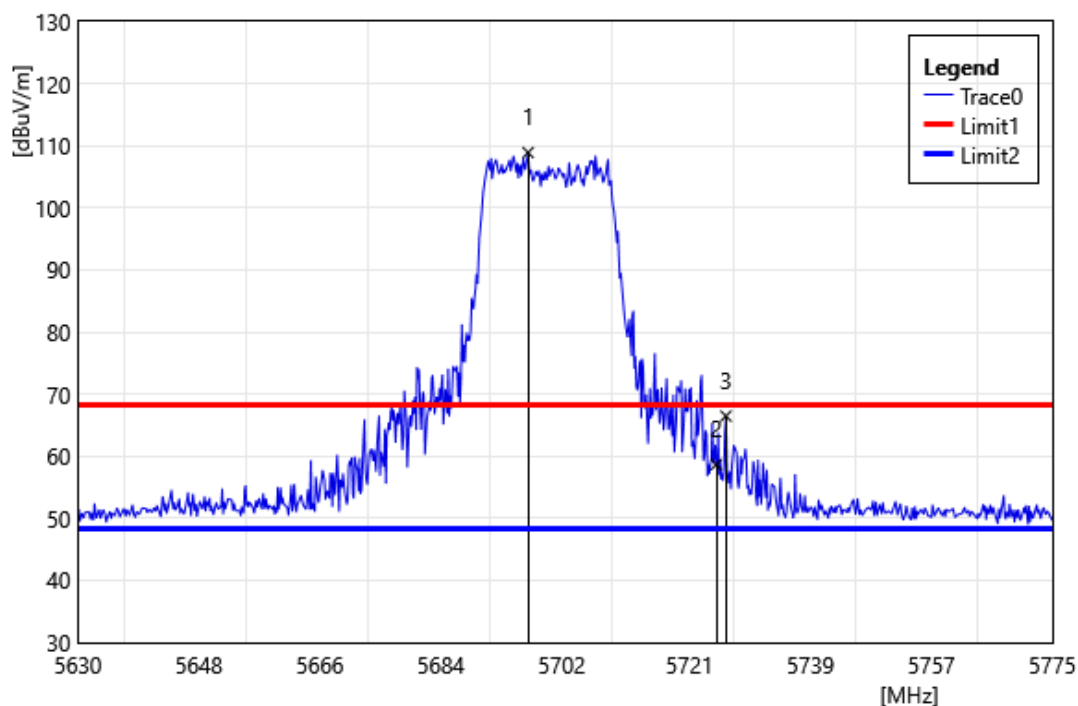


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5696.99	109.53	-0.61	108.92	68.20	40.72	PEAK
2	5725.00	59.02	-0.34	58.68	68.20	-9.52	PEAK
3	5726.43	66.80	-0.33	66.47	68.20	-1.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

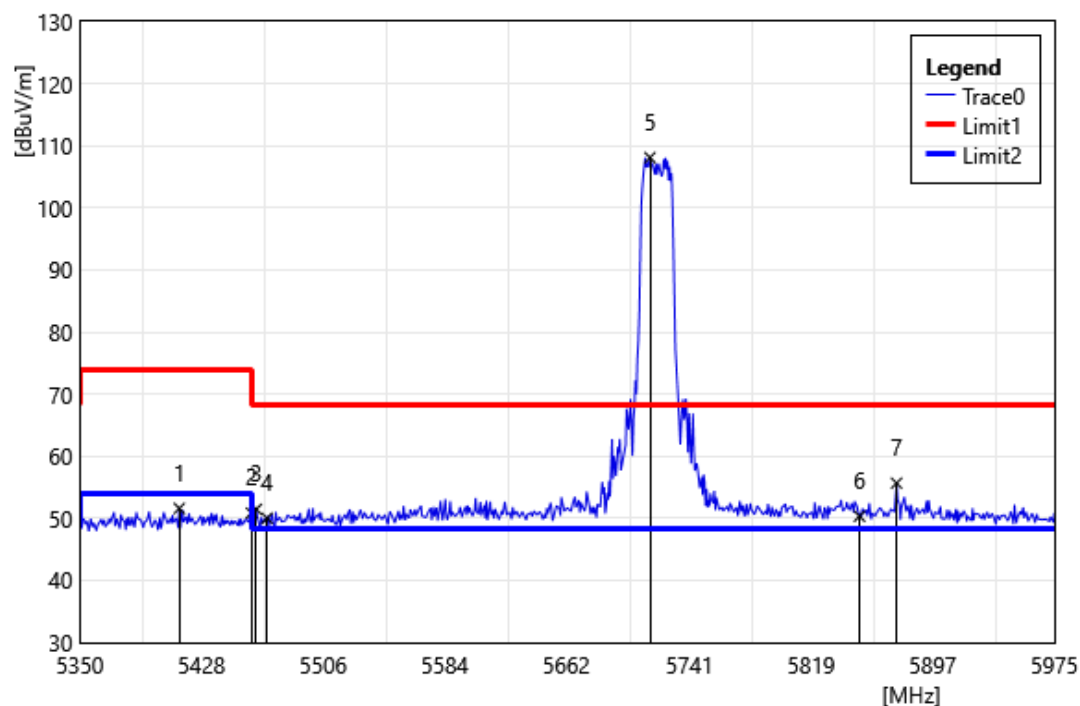


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5413.75	52.45	-0.84	51.61	74.00	-22.39	PEAK
2	5460.00	51.44	-0.57	50.87	74.00	-23.13	PEAK
3	5463.13	52.03	-0.57	51.46	68.20	-16.74	PEAK
4	5470.00	50.58	-0.56	50.02	68.20	-18.18	PEAK
5	5715.63	108.54	-0.44	108.10	68.20	39.90	PEAK
6	5850.00	50.07	0.28	50.35	68.20	-17.85	PEAK
7	5873.75	55.33	0.34	55.67	68.20	-12.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

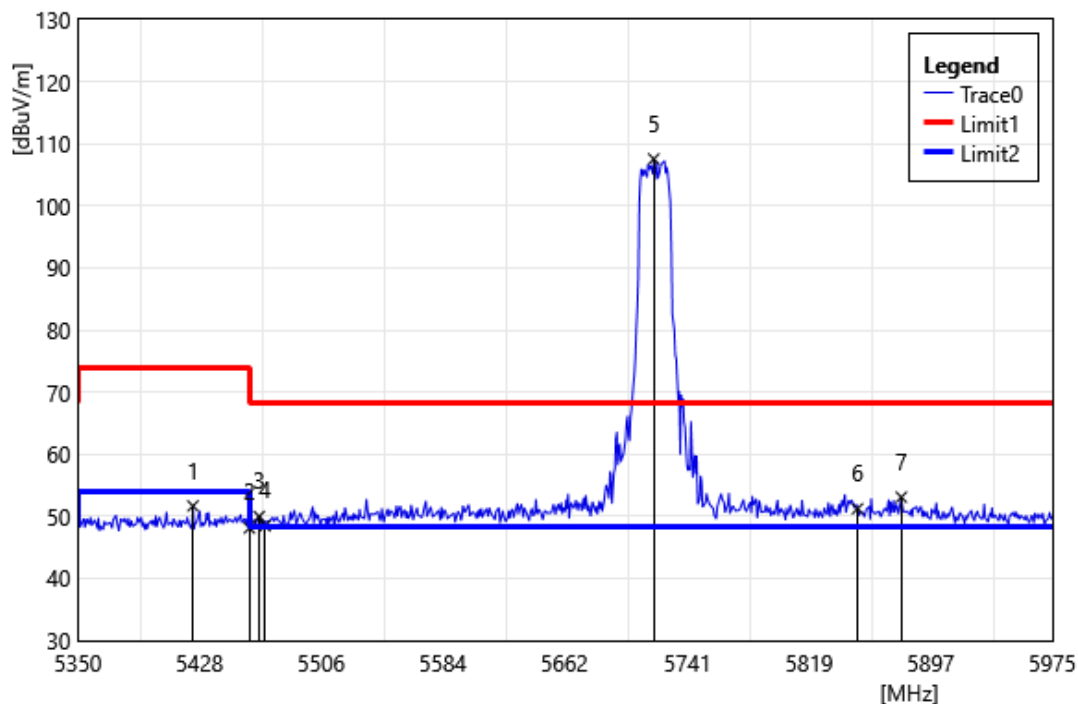


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5423.75	52.45	-0.77	51.68	74.00	-22.32	PEAK
2	5460.00	48.70	-0.57	48.13	74.00	-25.87	PEAK
3	5466.25	50.54	-0.57	49.98	68.20	-18.23	PEAK
4	5470.00	49.04	-0.56	48.48	68.20	-19.72	PEAK
5	5719.38	107.96	-0.40	107.56	68.20	39.36	PEAK
6	5850.00	50.95	0.28	51.23	68.20	-16.97	PEAK
7	5878.13	52.74	0.35	53.09	68.20	-15.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5745 MHz		
Polarization:	Vertical		
Remark:			

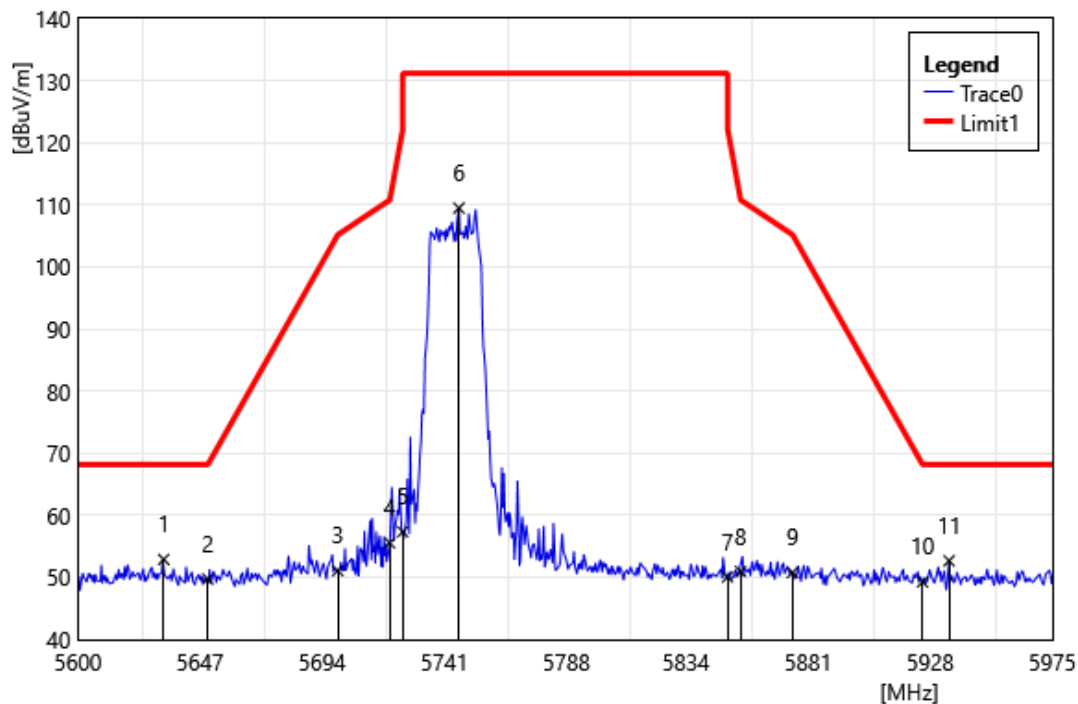


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.00	53.52	-0.62	52.90	68.20	-15.30	PEAK
2	5650.00	50.38	-0.64	49.74	68.20	-18.46	PEAK
3	5700.00	51.69	-0.61	51.08	105.20	-54.12	PEAK
4	5720.00	55.96	-0.40	55.56	110.80	-55.24	PEAK
5	5725.00	57.71	-0.34	57.37	131.20	-73.83	PEAK
6	5746.63	109.61	-0.12	109.49	131.20	-21.71	PEAK
7	5850.00	49.79	0.28	50.07	122.20	-72.13	PEAK
8	5855.00	50.68	0.29	50.97	110.80	-59.83	PEAK
9	5875.00	50.45	0.34	50.79	105.20	-54.41	PEAK
10	5925.00	48.99	0.28	49.27	68.20	-18.93	PEAK
11	5935.25	52.46	0.22	52.68	68.20	-15.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5745 MHz		
Polarization:	Horizontal		
Remark:			

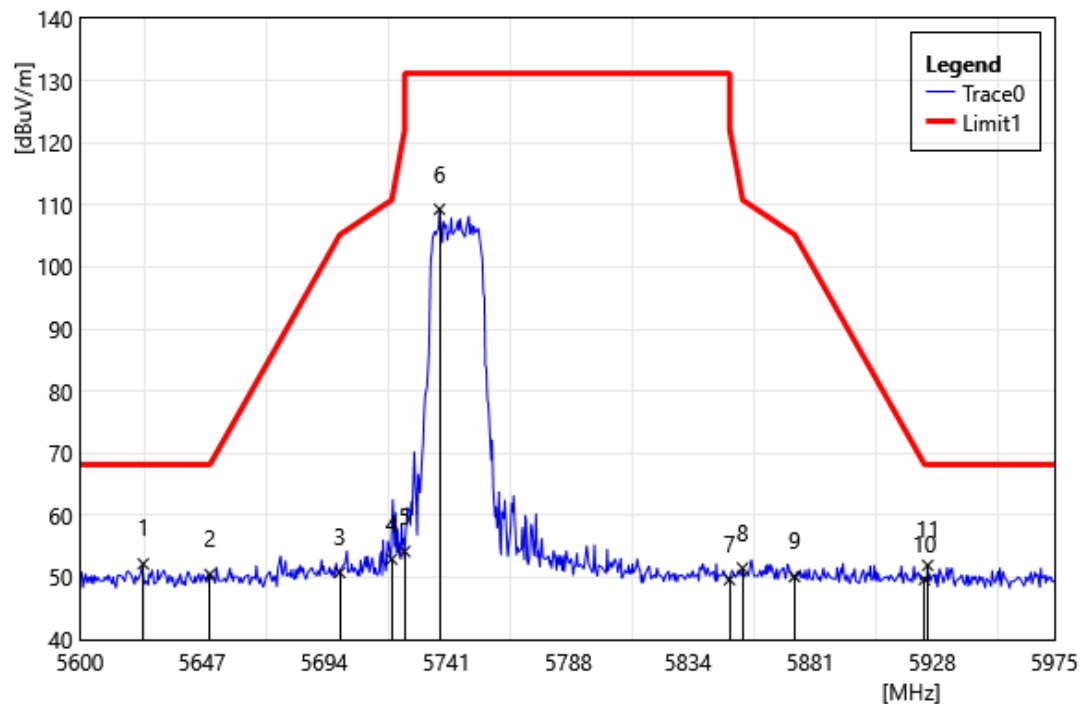


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5624.38	52.78	-0.60	52.18	68.20	-16.03	PEAK
2	5650.00	51.12	-0.64	50.48	68.20	-17.72	PEAK
3	5700.00	51.40	-0.61	50.79	105.20	-54.41	PEAK
4	5720.00	53.34	-0.40	52.94	110.80	-57.86	PEAK
5	5725.00	54.53	-0.34	54.19	131.20	-77.01	PEAK
6	5738.38	109.48	-0.20	109.28	131.20	-21.92	PEAK
7	5850.00	49.36	0.28	49.64	122.20	-72.56	PEAK
8	5855.00	51.22	0.29	51.51	110.80	-59.29	PEAK
9	5875.00	49.80	0.34	50.14	105.20	-55.06	PEAK
10	5925.00	49.38	0.28	49.66	68.20	-18.54	PEAK
11	5926.25	51.69	0.27	51.96	68.20	-16.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

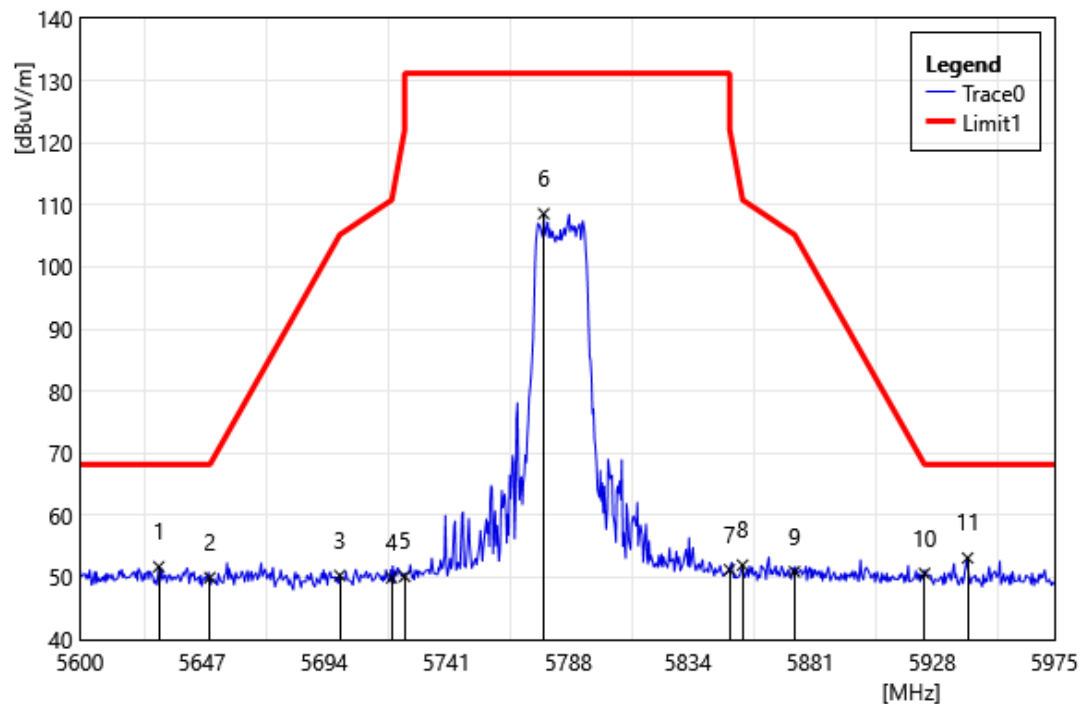


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5630.38	52.32	-0.61	51.71	68.20	-16.50	PEAK
2	5650.00	50.60	-0.64	49.96	68.20	-18.24	PEAK
3	5700.00	50.92	-0.61	50.31	105.20	-54.89	PEAK
4	5720.00	50.34	-0.40	49.94	110.80	-60.86	PEAK
5	5725.00	50.50	-0.34	50.16	131.20	-81.04	PEAK
6	5778.50	108.53	0.05	108.58	131.20	-22.62	PEAK
7	5850.00	50.97	0.28	51.25	122.20	-70.95	PEAK
8	5855.00	51.70	0.29	51.99	110.80	-58.81	PEAK
9	5875.00	50.58	0.34	50.92	105.20	-54.28	PEAK
10	5925.00	50.34	0.28	50.62	68.20	-17.58	PEAK
11	5941.63	52.93	0.19	53.12	68.20	-15.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

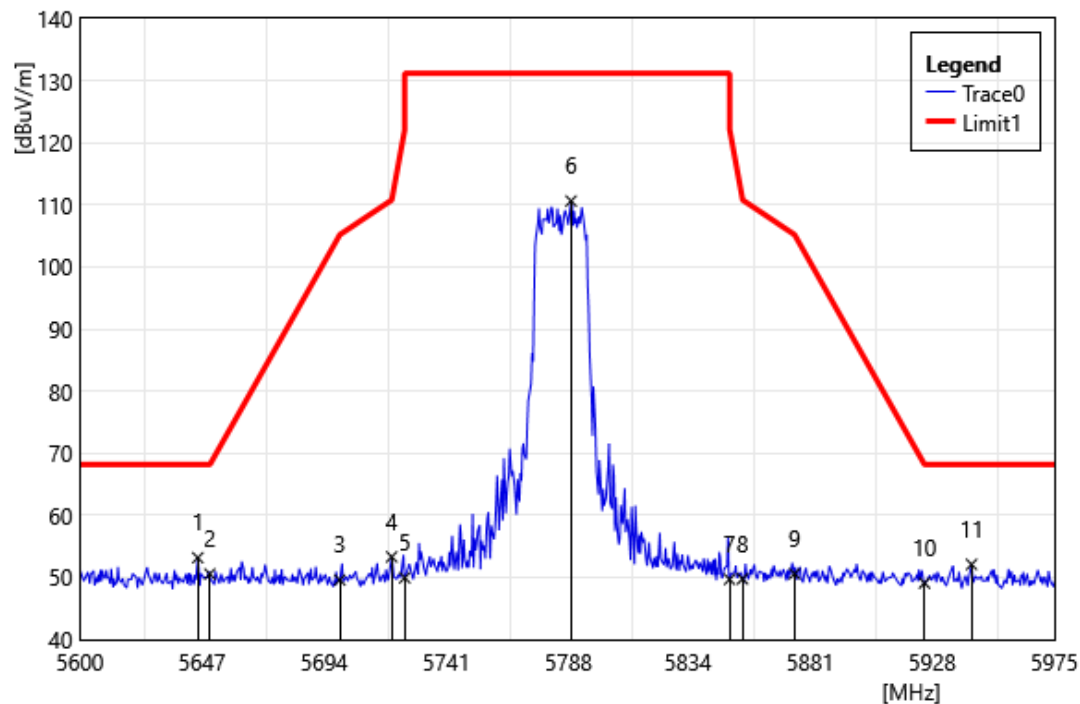


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5645.38	53.81	-0.63	53.18	68.20	-15.02	PEAK
2	5650.00	51.20	-0.64	50.56	68.20	-17.64	PEAK
3	5700.00	50.20	-0.61	49.59	105.20	-55.61	PEAK
4	5720.00	53.71	-0.40	53.31	110.80	-57.49	PEAK
5	5725.00	50.29	-0.34	49.95	131.20	-81.25	PEAK
6	5789.00	110.52	0.10	110.62	131.20	-20.58	PEAK
7	5850.00	49.43	0.28	49.71	122.20	-72.49	PEAK
8	5855.00	49.48	0.29	49.77	110.80	-61.03	PEAK
9	5875.00	50.25	0.34	50.59	105.20	-54.61	PEAK
10	5925.00	48.82	0.28	49.10	68.20	-19.10	PEAK
11	5943.13	51.93	0.18	52.11	68.20	-16.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5825 MHz		
Polarization:	Vertical		
Remark:			

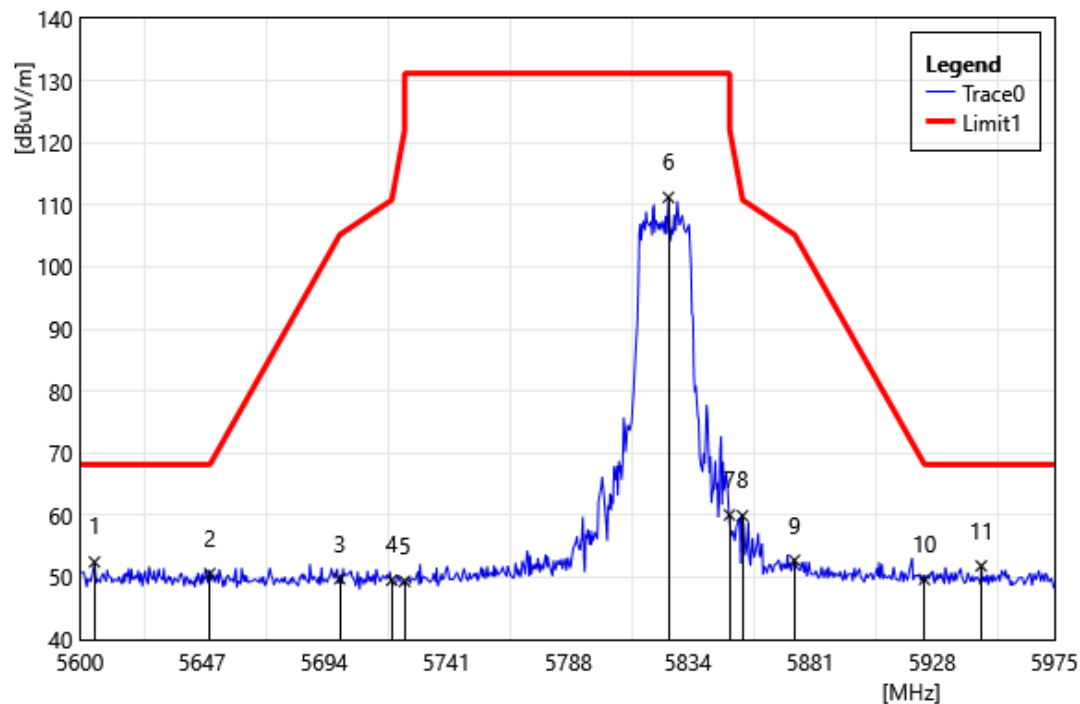


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5605.63	53.08	-0.58	52.50	68.20	-15.71	PEAK
2	5650.00	51.26	-0.64	50.62	68.20	-17.58	PEAK
3	5700.00	50.40	-0.61	49.79	105.20	-55.41	PEAK
4	5720.00	49.94	-0.40	49.54	110.80	-61.26	PEAK
5	5725.00	49.72	-0.34	49.38	131.20	-81.82	PEAK
6	5826.50	111.01	0.22	111.23	131.20	-19.97	PEAK
7	5850.00	59.80	0.28	60.08	122.20	-62.12	PEAK
8	5855.00	59.64	0.29	59.93	110.80	-50.87	PEAK
9	5875.00	52.41	0.34	52.75	105.20	-52.45	PEAK
10	5925.00	49.40	0.28	49.68	68.20	-18.52	PEAK
11	5946.88	51.69	0.16	51.85	68.20	-16.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5825 MHz		
Polarization:	Horizontal		
Remark:			

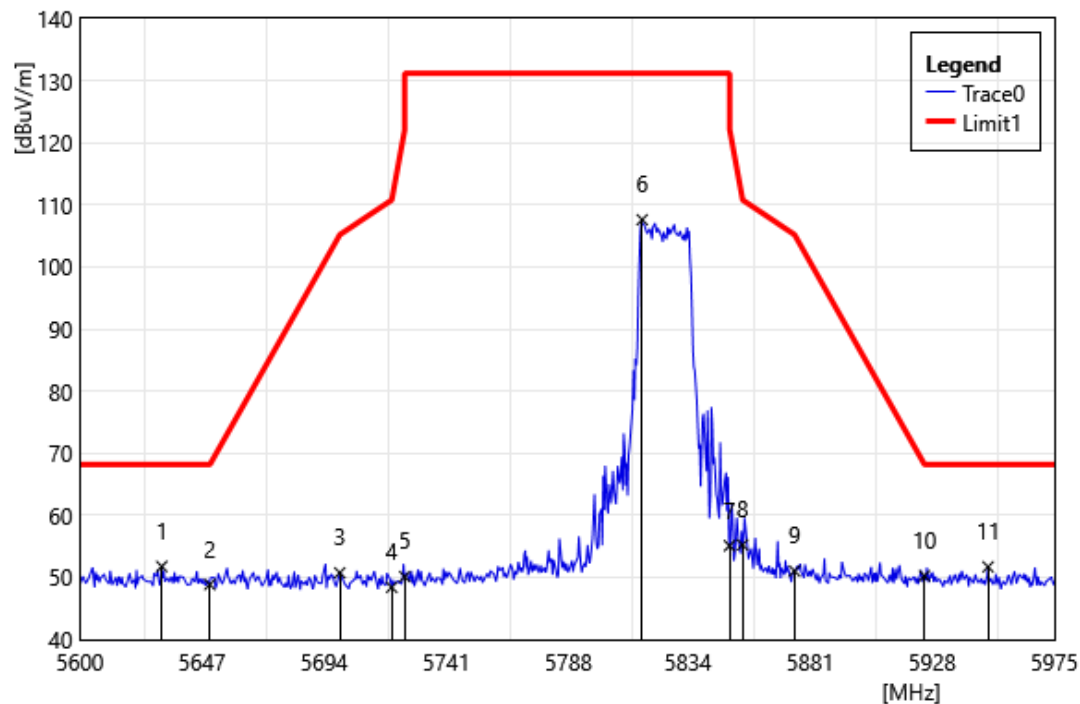


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5631.50	52.38	-0.61	51.77	68.20	-16.43	PEAK
2	5650.00	49.50	-0.64	48.86	68.20	-19.34	PEAK
3	5700.00	51.35	-0.61	50.74	105.20	-54.46	PEAK
4	5720.00	48.81	-0.40	48.41	110.80	-62.39	PEAK
5	5725.00	50.47	-0.34	50.13	131.20	-81.07	PEAK
6	5816.38	107.42	0.19	107.61	131.20	-23.59	PEAK
7	5850.00	54.83	0.28	55.11	122.20	-67.09	PEAK
8	5855.00	54.98	0.29	55.27	110.80	-55.53	PEAK
9	5875.00	50.71	0.34	51.05	105.20	-54.15	PEAK
10	5925.00	49.98	0.28	50.26	68.20	-17.94	PEAK
11	5949.50	51.58	0.14	51.72	68.20	-16.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

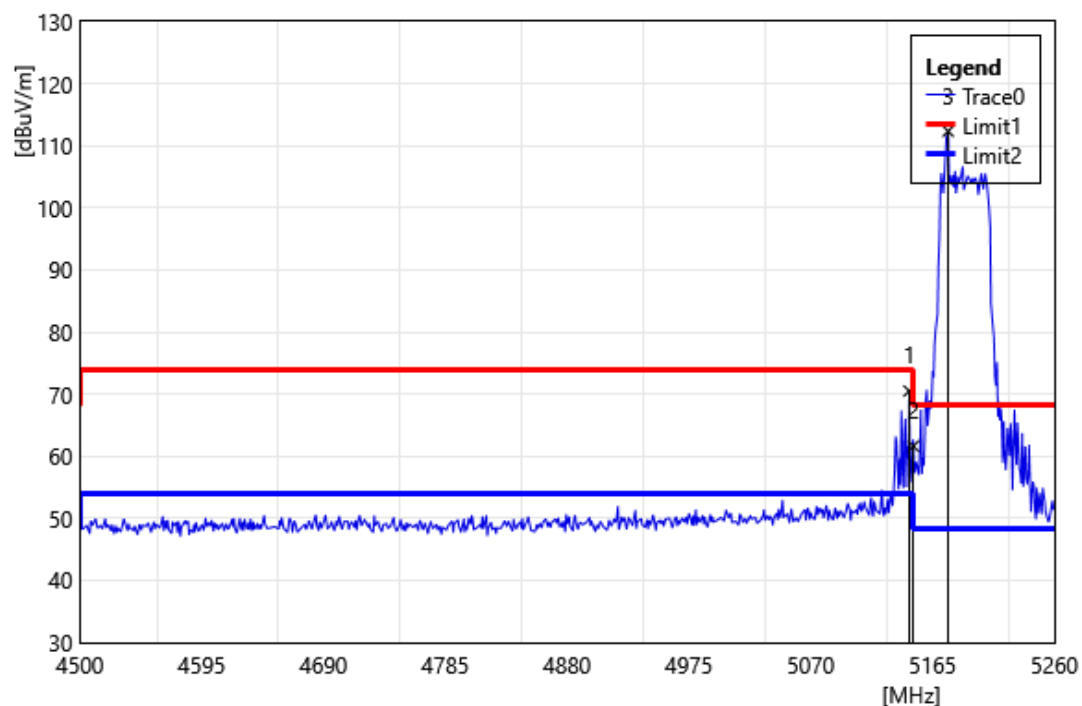


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	71.41	-0.90	70.51	74.00	-3.49	PEAK
2	5150.00	62.54	-0.91	61.63	74.00	-12.37	PEAK
3	5177.16	113.39	-1.04	112.35	68.20	44.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

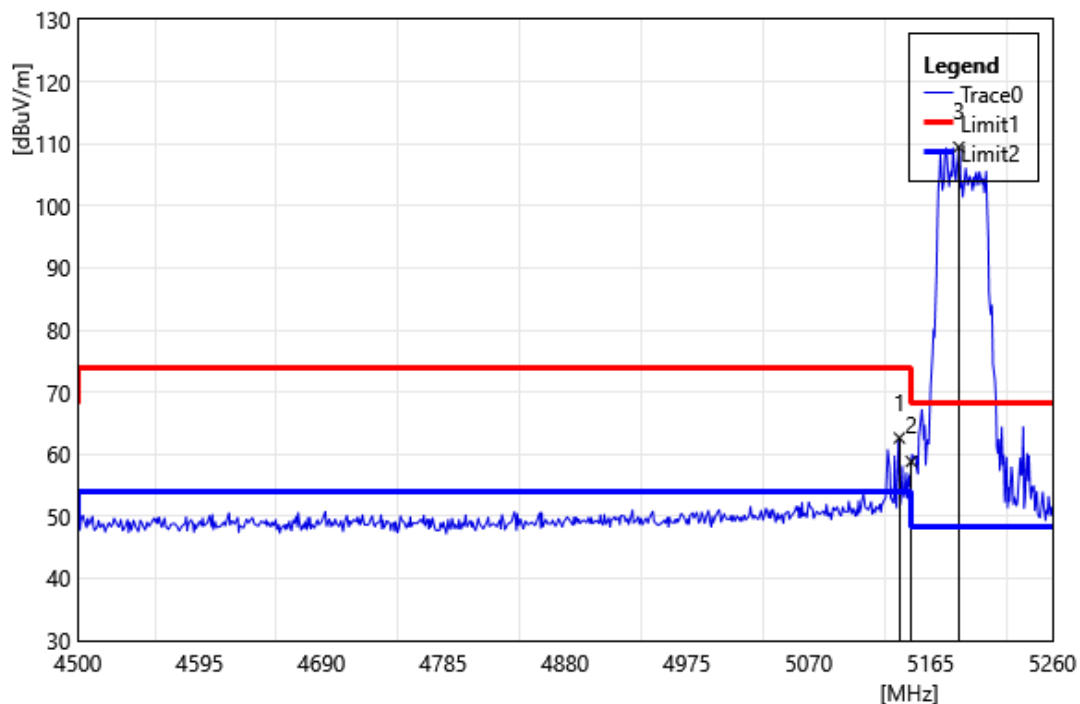


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.68	63.52	-0.90	62.62	74.00	-11.38	PEAK
2	5150.00	59.75	-0.91	58.84	74.00	-15.16	PEAK
3	5187.04	110.54	-1.09	109.45	68.20	41.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

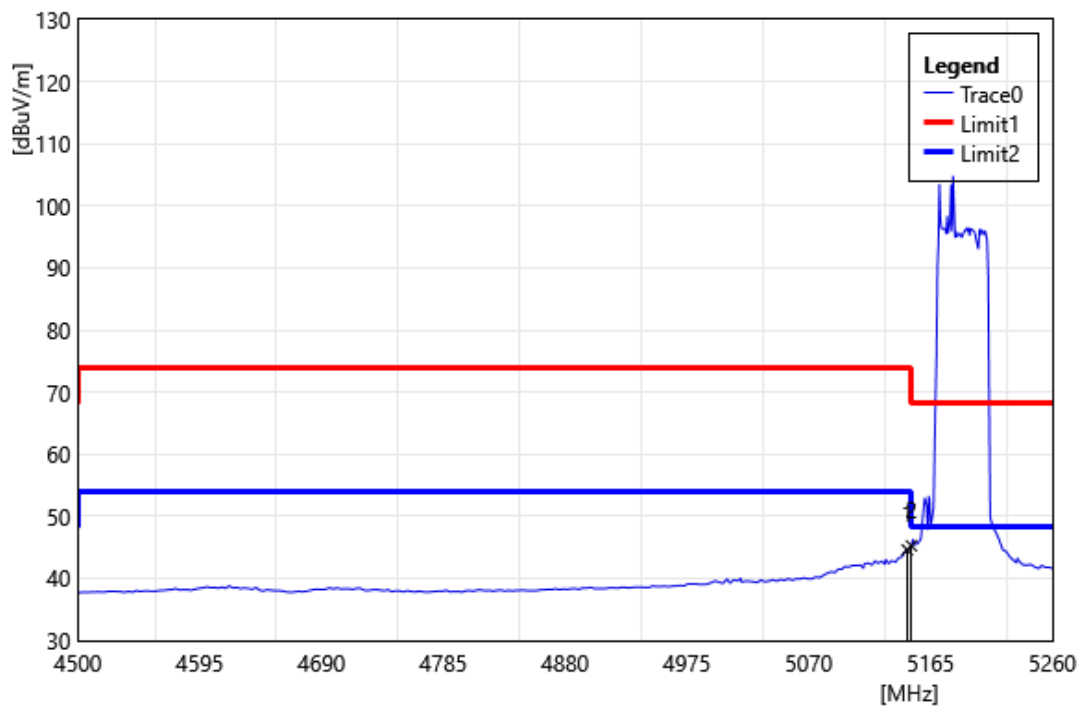


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	45.50	-0.90	44.60	54.00	-9.40	AVG
2	5150.00	46.17	-0.91	45.26	54.00	-8.74	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

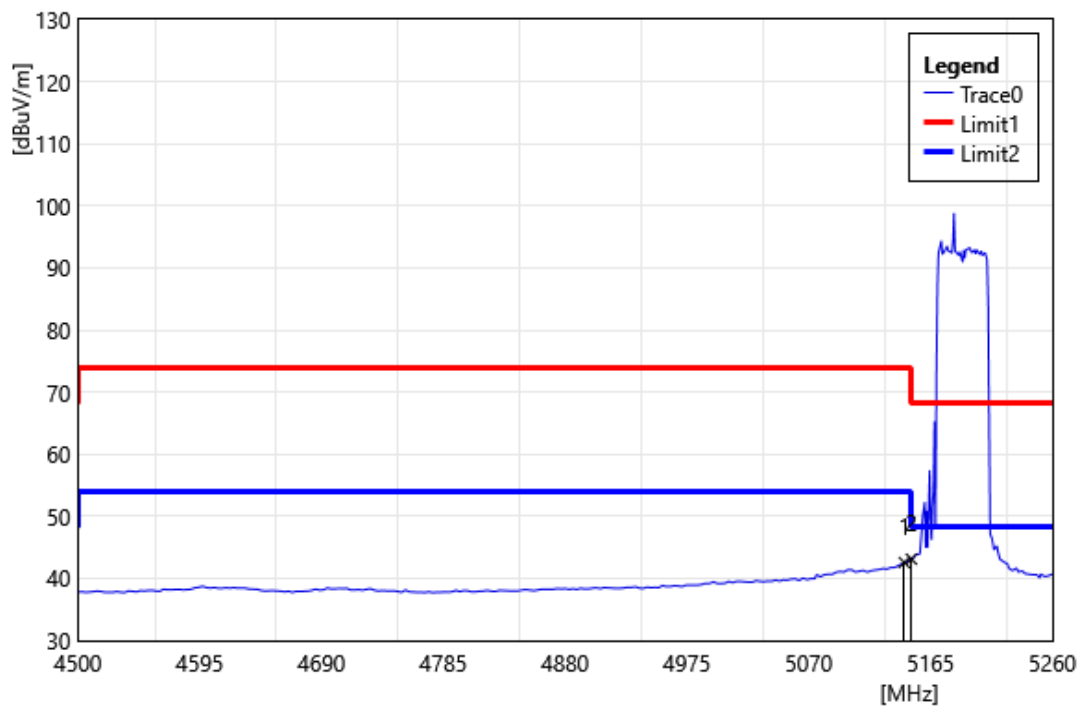


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	43.47	-0.90	42.57	54.00	-11.43	AVG
2	5150.00	44.04	-0.91	43.13	54.00	-10.87	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

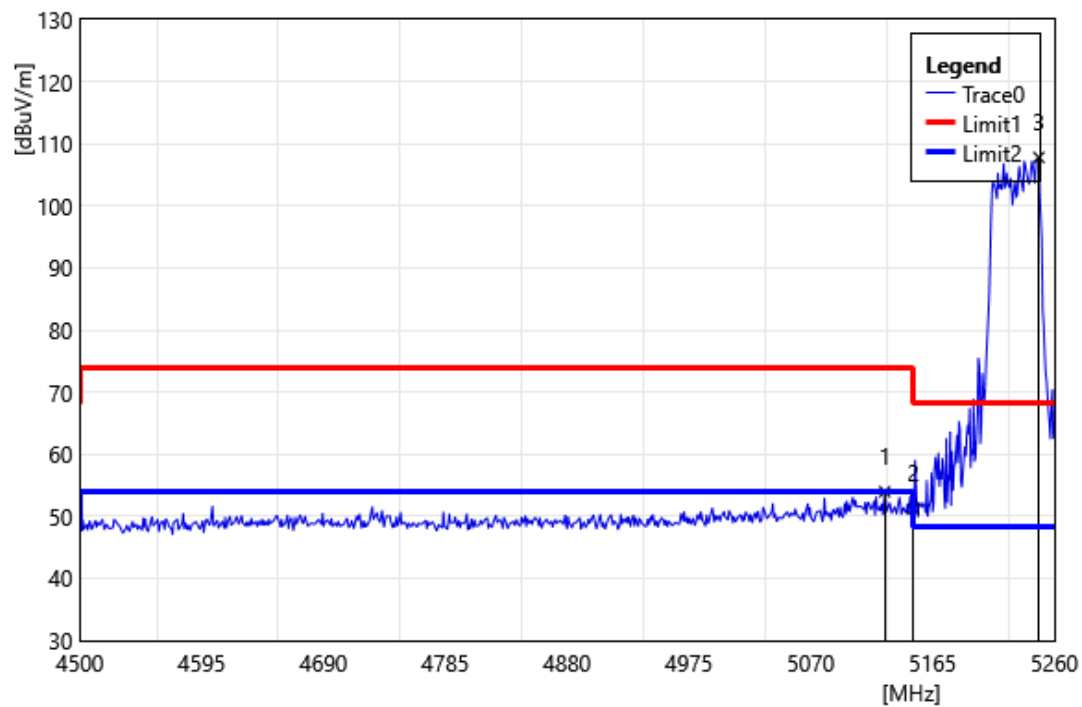


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5127.76	54.86	-0.89	53.98	74.00	-20.03	PEAK
2	5150.00	52.18	-0.91	51.27	74.00	-22.73	PEAK
3	5247.84	109.30	-1.49	107.81	68.20	39.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

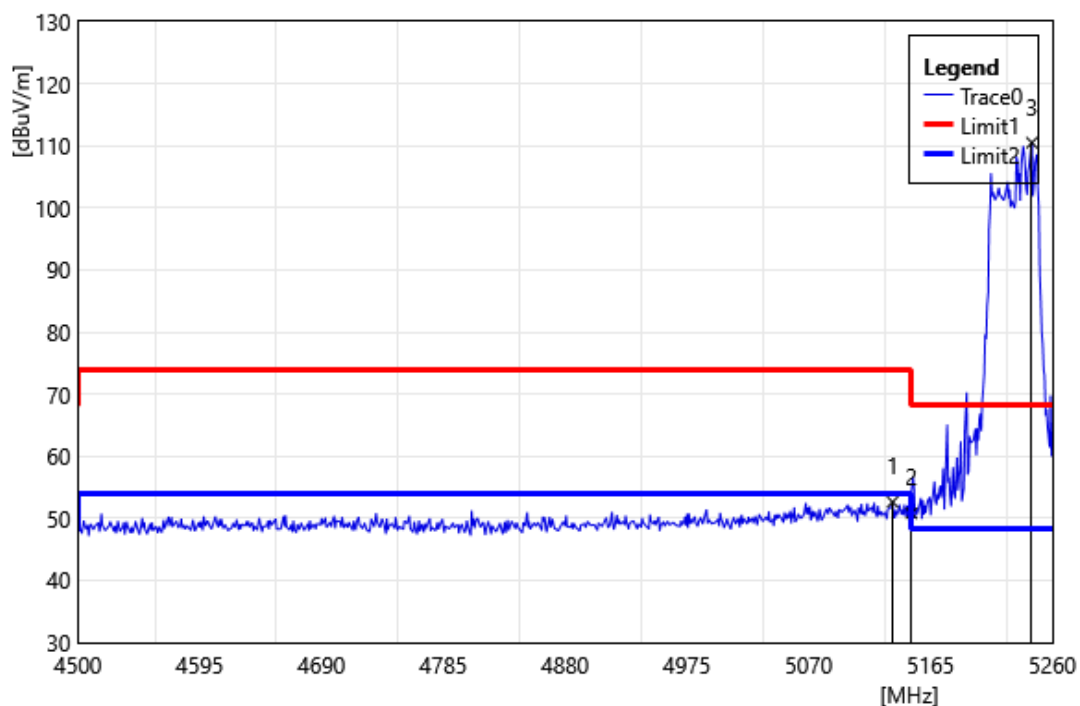


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5135.36	53.53	-0.89	52.64	74.00	-21.36	PEAK
2	5150.00	51.73	-0.91	50.82	74.00	-23.18	PEAK
3	5244.04	111.96	-1.46	110.50	68.20	42.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

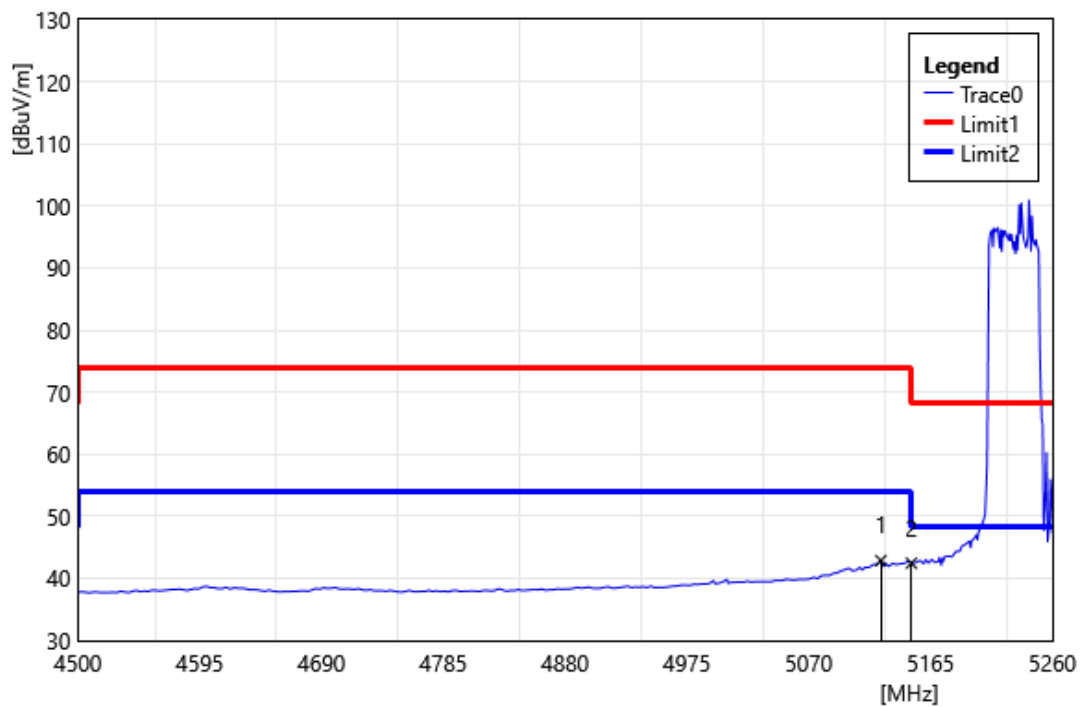


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5126.24	43.77	-0.89	42.88	54.00	-11.12	AVG
2	5150.00	43.37	-0.91	42.46	54.00	-11.54	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

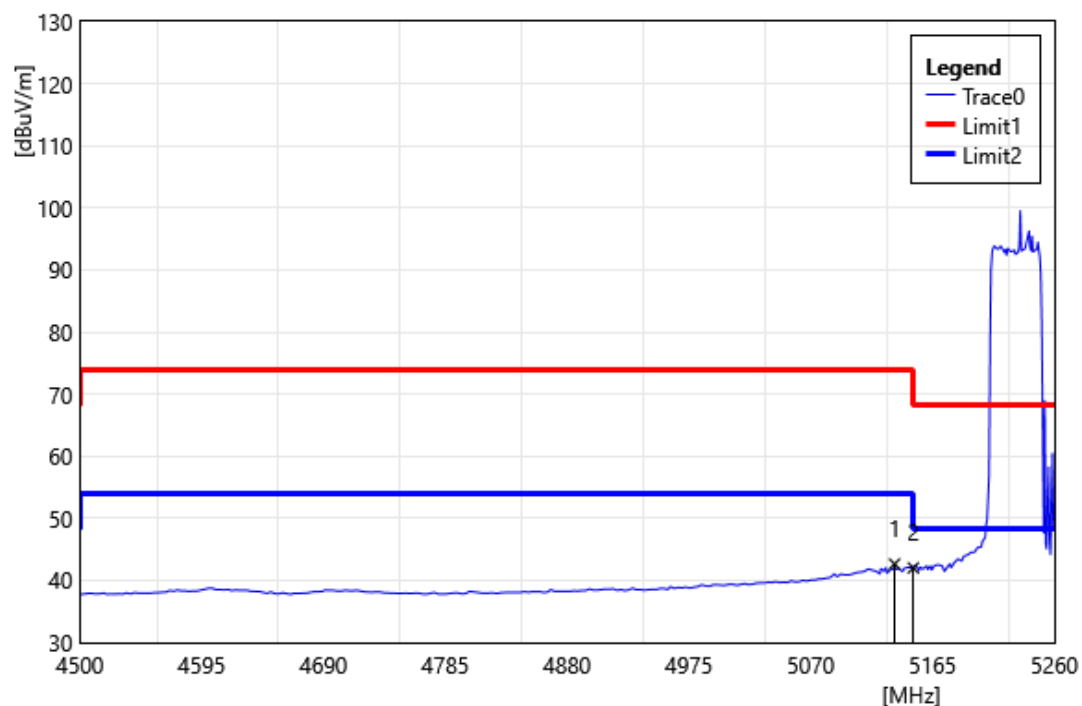


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5135.36	43.54	-0.89	42.65	54.00	-11.35	AVG
2	5150.00	42.93	-0.91	42.02	54.00	-11.98	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

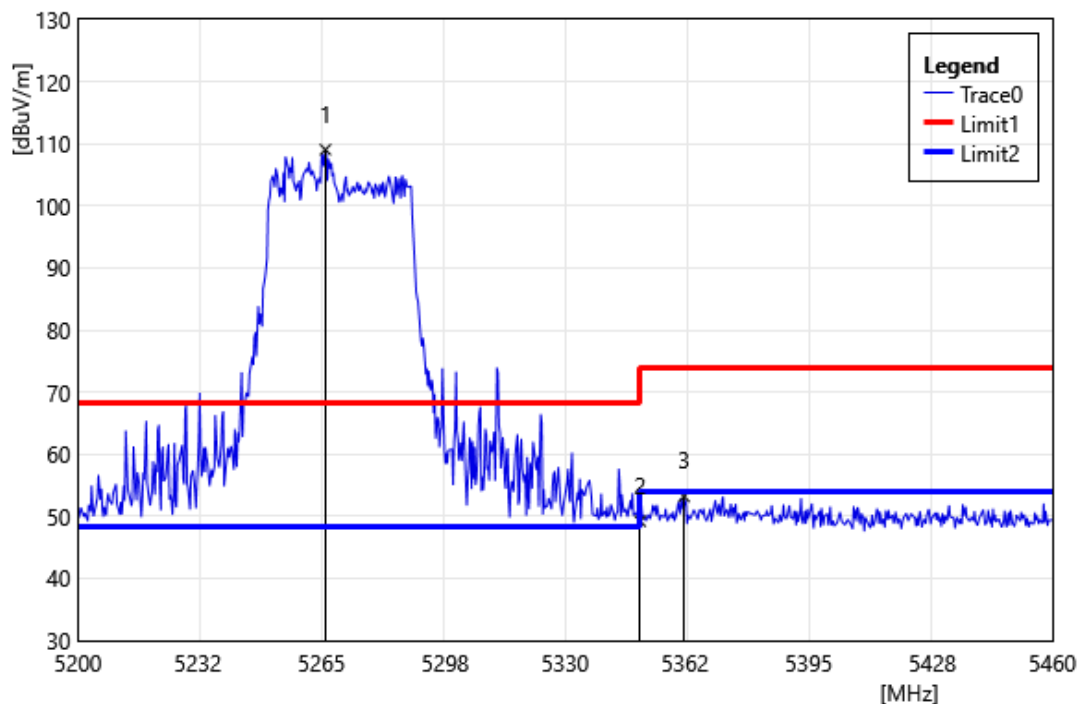


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5266.04	110.62	-1.55	109.07	68.20	40.87	PEAK
2	5350.00	50.51	-1.29	49.22	74.00	-24.78	PEAK
3	5361.72	54.42	-1.21	53.21	74.00	-20.80	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

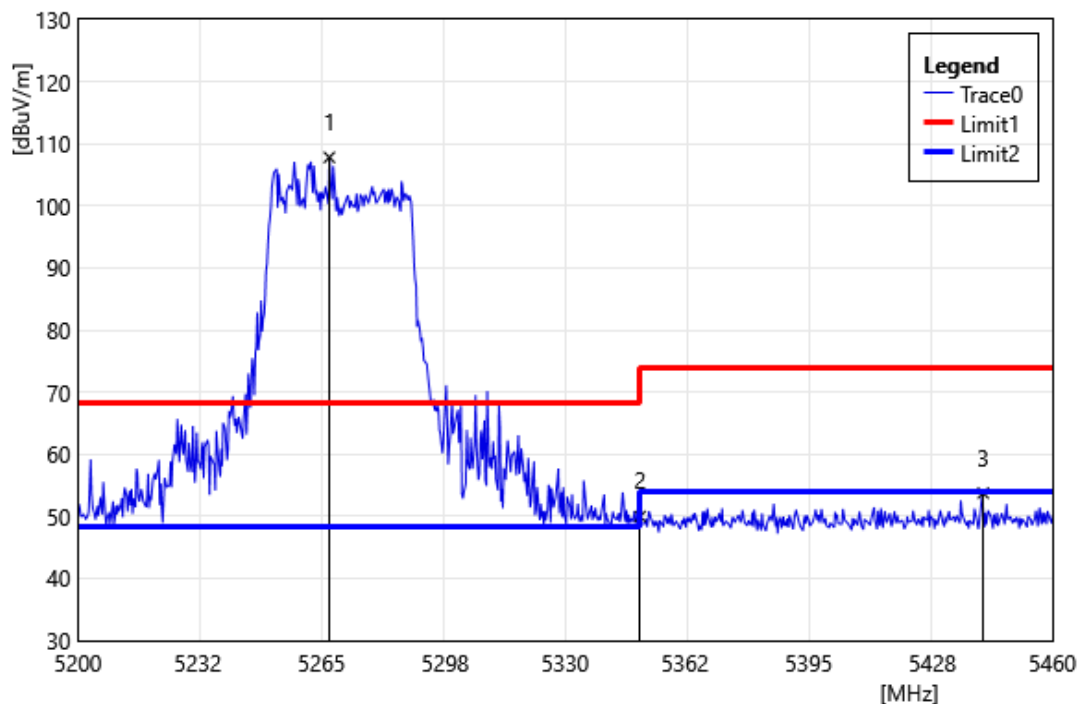


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5267.08	109.36	-1.55	107.81	68.20	39.61	PEAK
2	5350.00	51.28	-1.29	49.98	74.00	-24.02	PEAK
3	5441.54	54.39	-0.64	53.75	74.00	-20.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

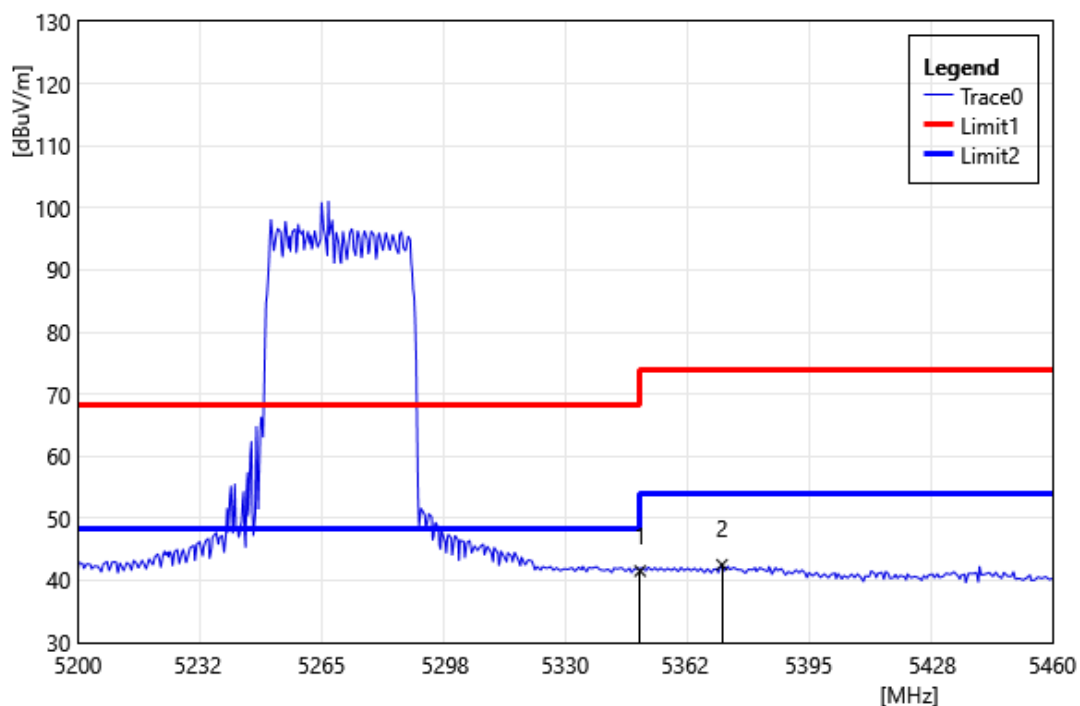


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	42.81	-1.29	41.52	54.00	-12.48	AVG
2	5371.86	43.66	-1.14	42.52	54.00	-11.48	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

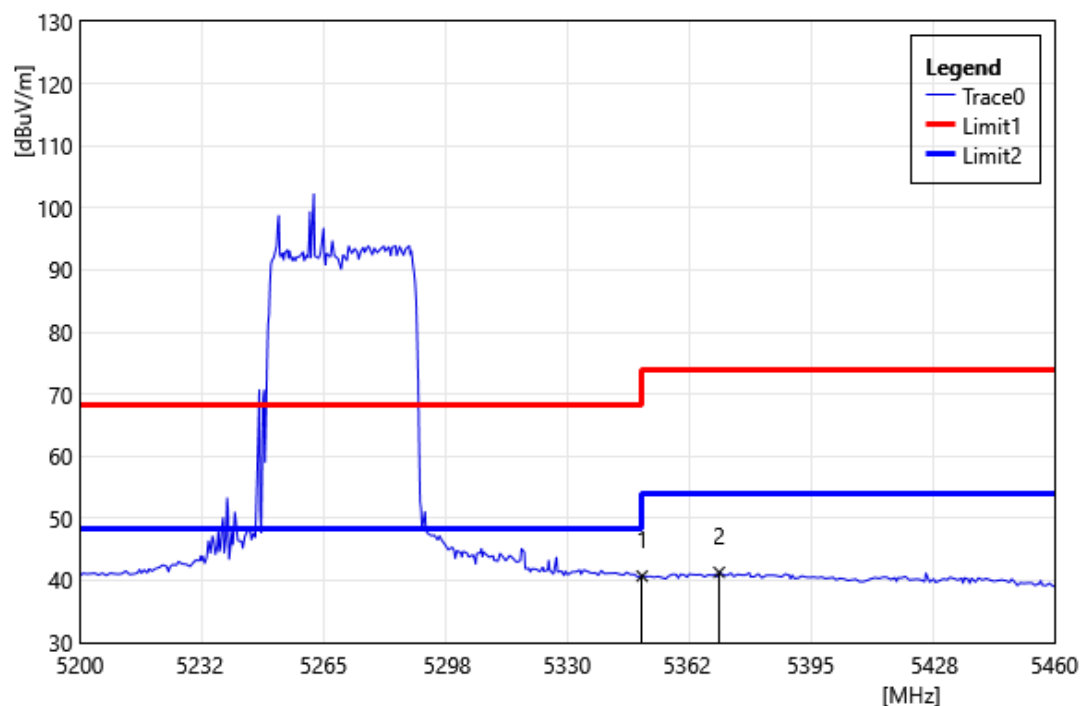


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.99	-1.29	40.70	54.00	-13.30	AVG
2	5370.56	42.45	-1.15	41.30	54.00	-12.70	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

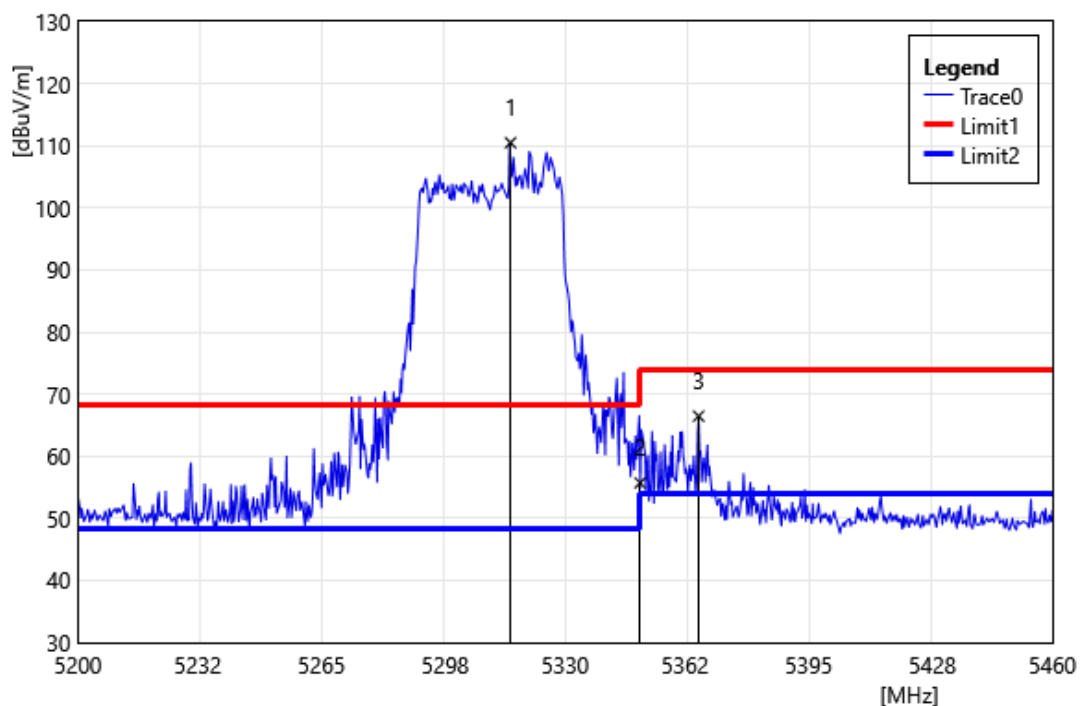


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5315.44	112.03	-1.54	110.49	68.20	42.29	PEAK
2	5350.00	57.01	-1.29	55.72	74.00	-18.28	PEAK
3	5365.62	67.64	-1.18	66.46	74.00	-7.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

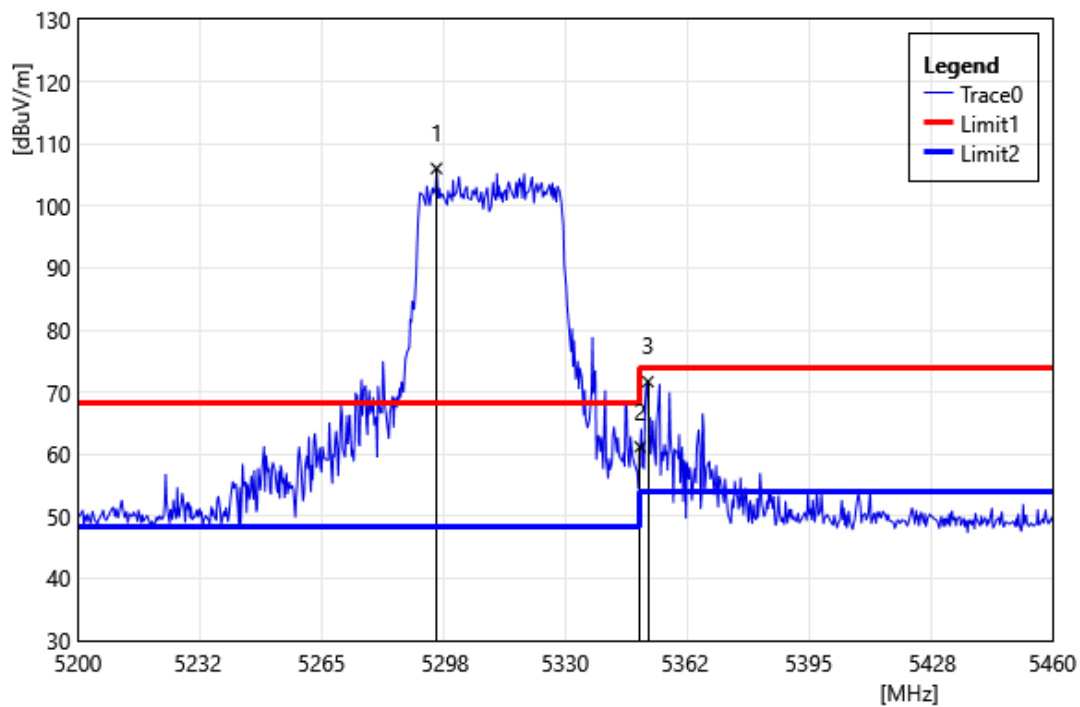


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5295.68	107.65	-1.63	106.02	68.20	37.82	PEAK
2	5350.00	62.49	-1.29	61.20	74.00	-12.80	PEAK
3	5352.10	72.96	-1.28	71.68	74.00	-2.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

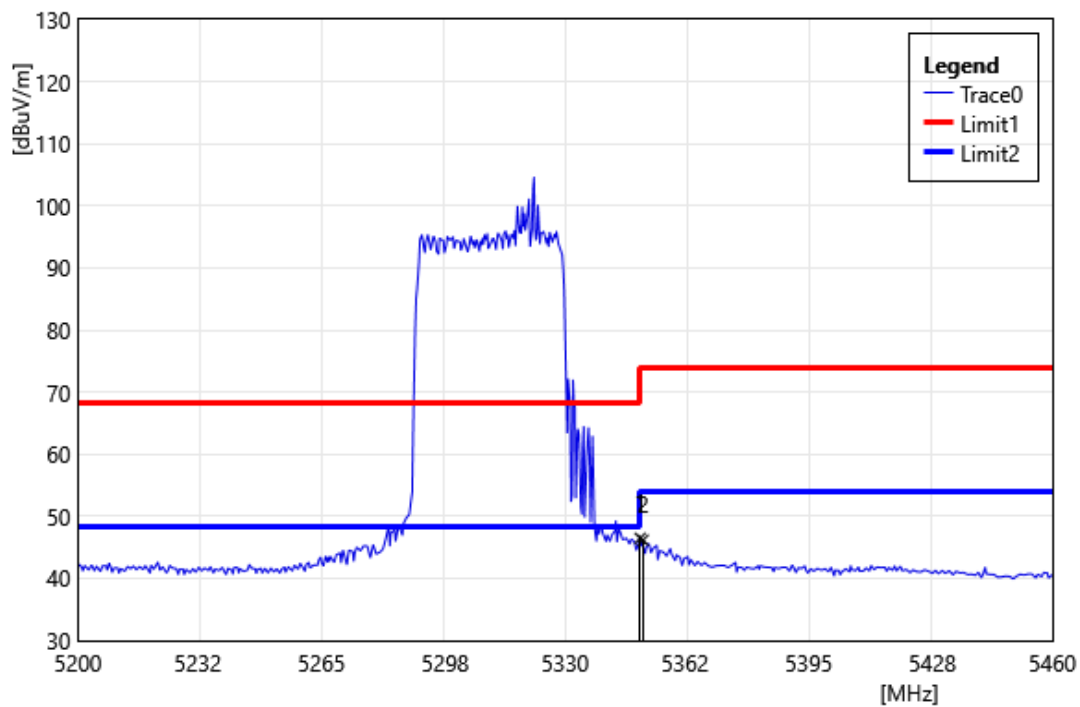


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	47.76	-1.29	46.47	54.00	-7.53	AVG
2	5350.80	47.47	-1.29	46.18	54.00	-7.82	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

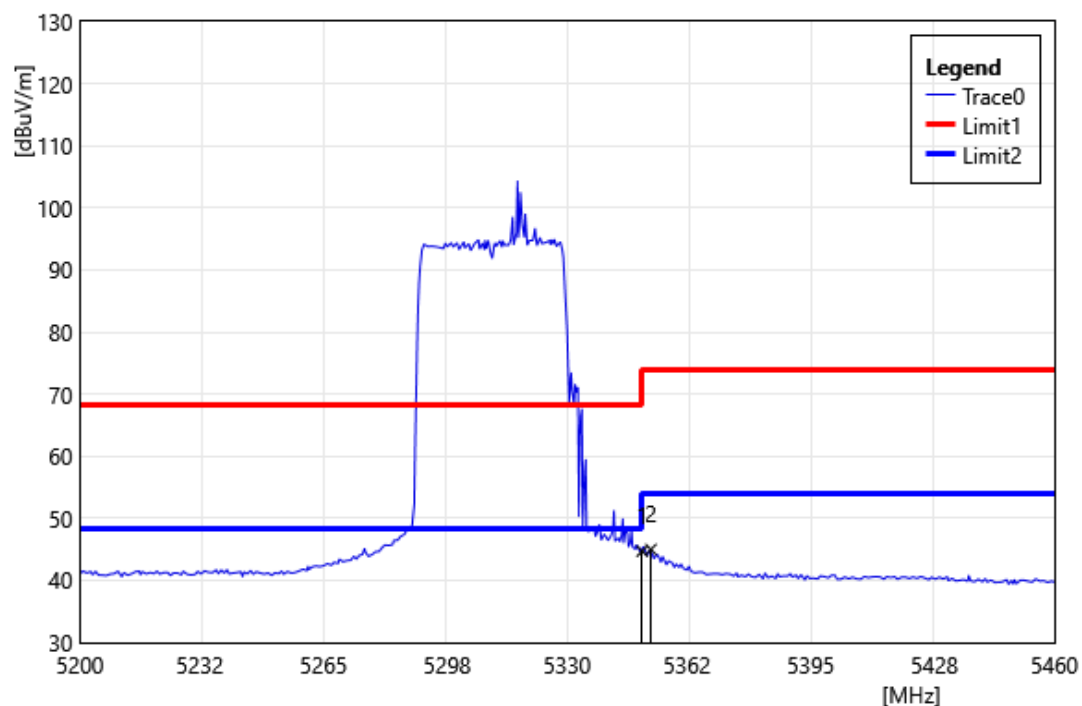


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	46.00	-1.29	44.71	54.00	-9.29	AVG
2	5352.36	46.28	-1.28	45.00	54.00	-9.00	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

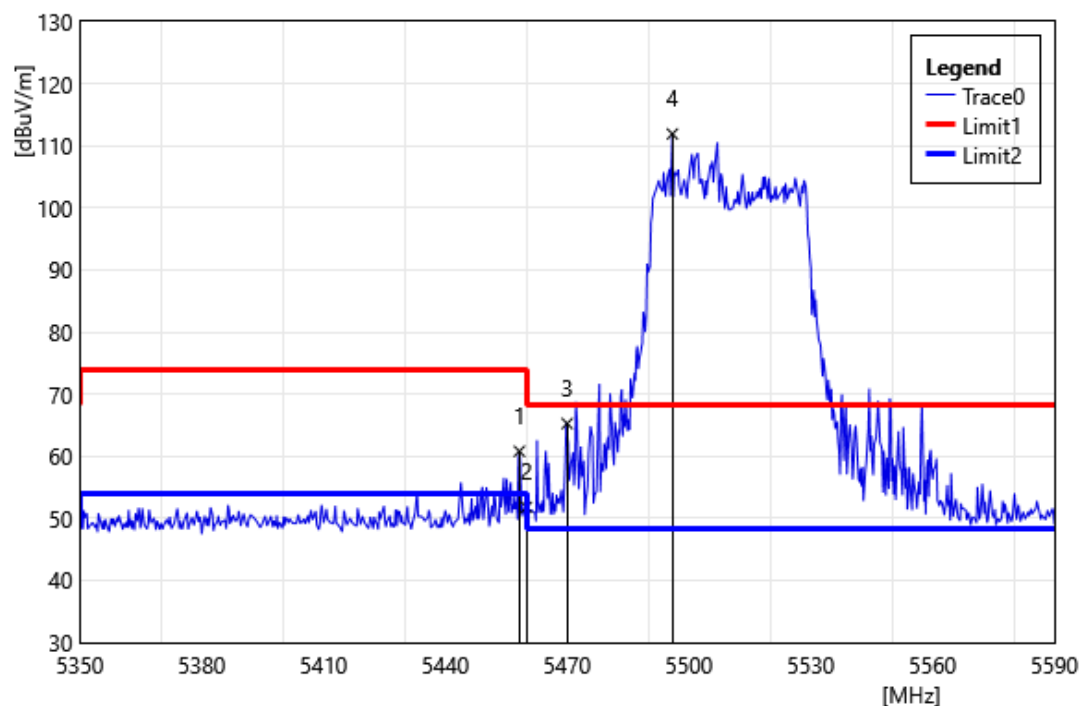


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	61.38	-0.58	60.80	74.00	-13.20	PEAK
2	5460.00	52.35	-0.57	51.78	74.00	-22.22	PEAK
3	5470.00	65.83	-0.56	65.27	68.20	-2.93	PEAK
4	5495.92	112.44	-0.53	111.92	68.20	43.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

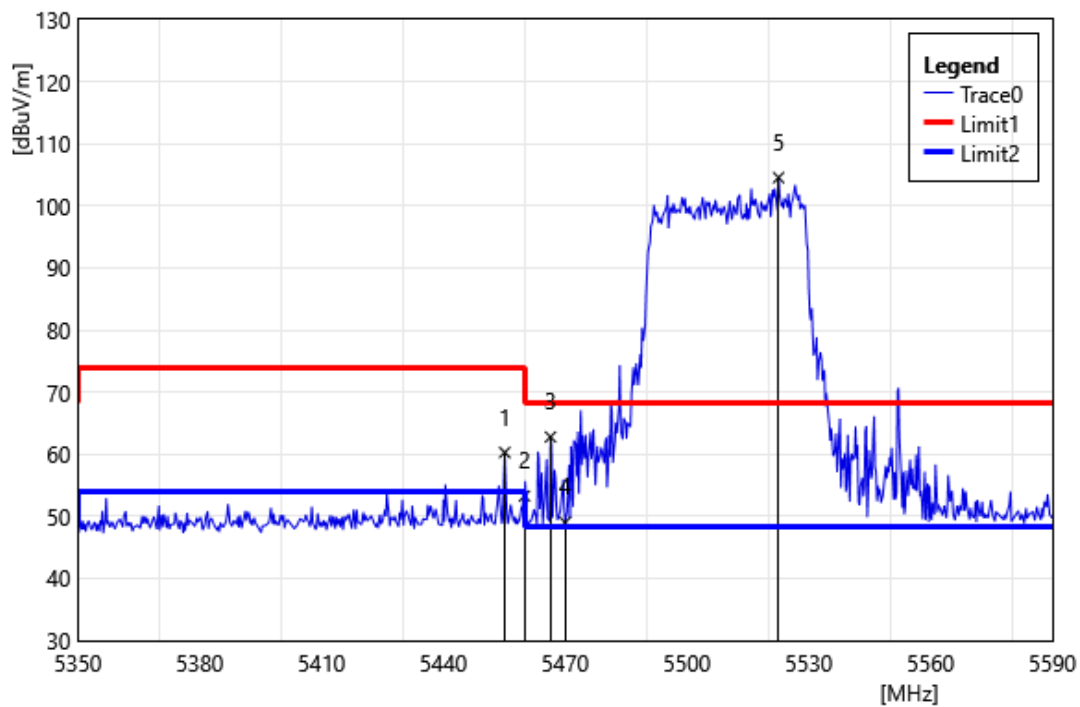


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.12	60.87	-0.58	60.29	74.00	-13.71	PEAK
2	5460.00	53.85	-0.57	53.28	74.00	-20.72	PEAK
3	5466.40	63.35	-0.57	62.78	68.20	-5.42	PEAK
4	5470.00	49.58	-0.56	49.02	68.20	-19.18	PEAK
5	5522.56	105.07	-0.52	104.55	68.20	36.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

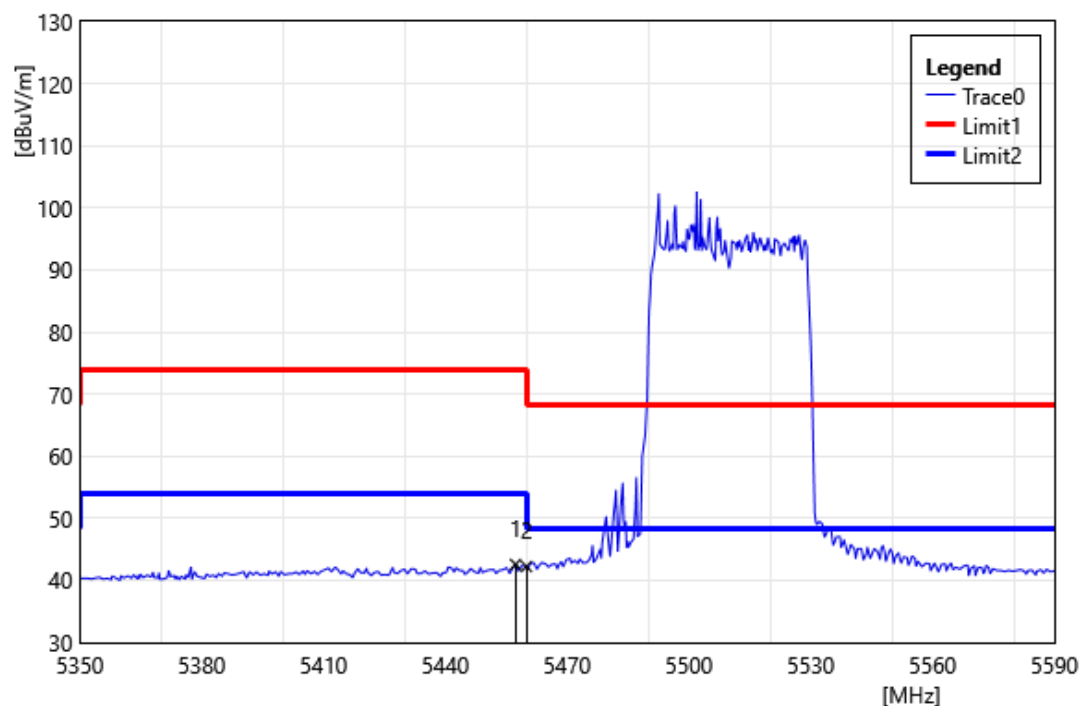


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.28	43.15	-0.58	42.57	54.00	-11.43	AVG
2	5460.00	42.81	-0.57	42.24	54.00	-11.76	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

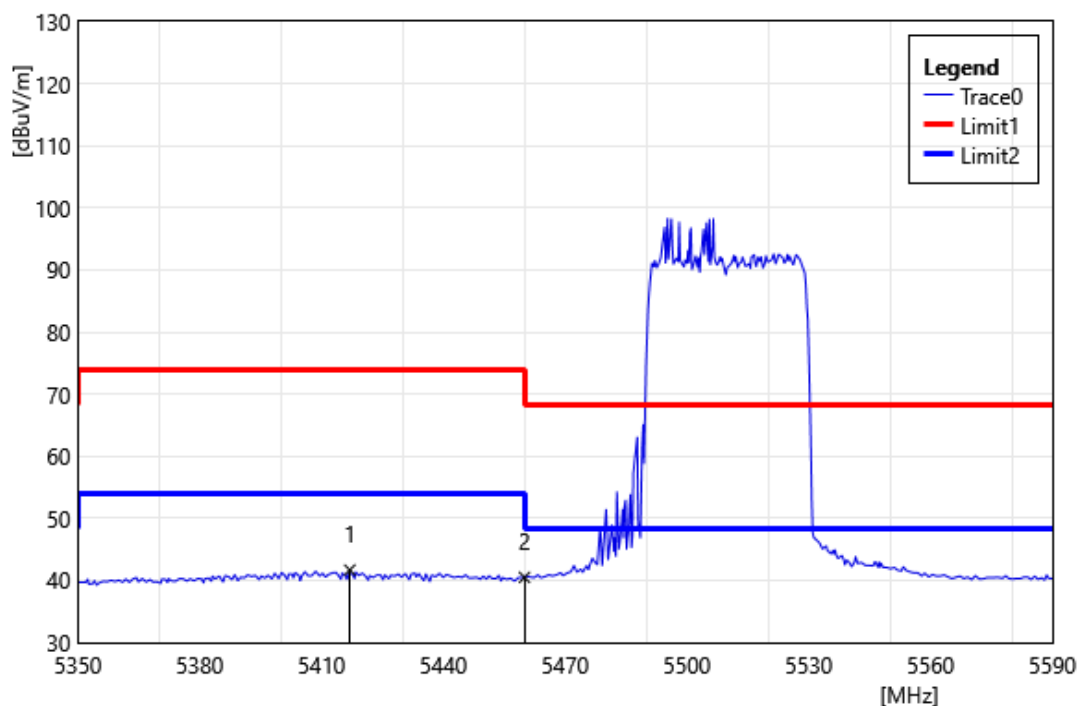


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5416.96	42.50	-0.82	41.69	54.00	-12.32	AVG
2	5460.00	41.08	-0.57	40.51	54.00	-13.49	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

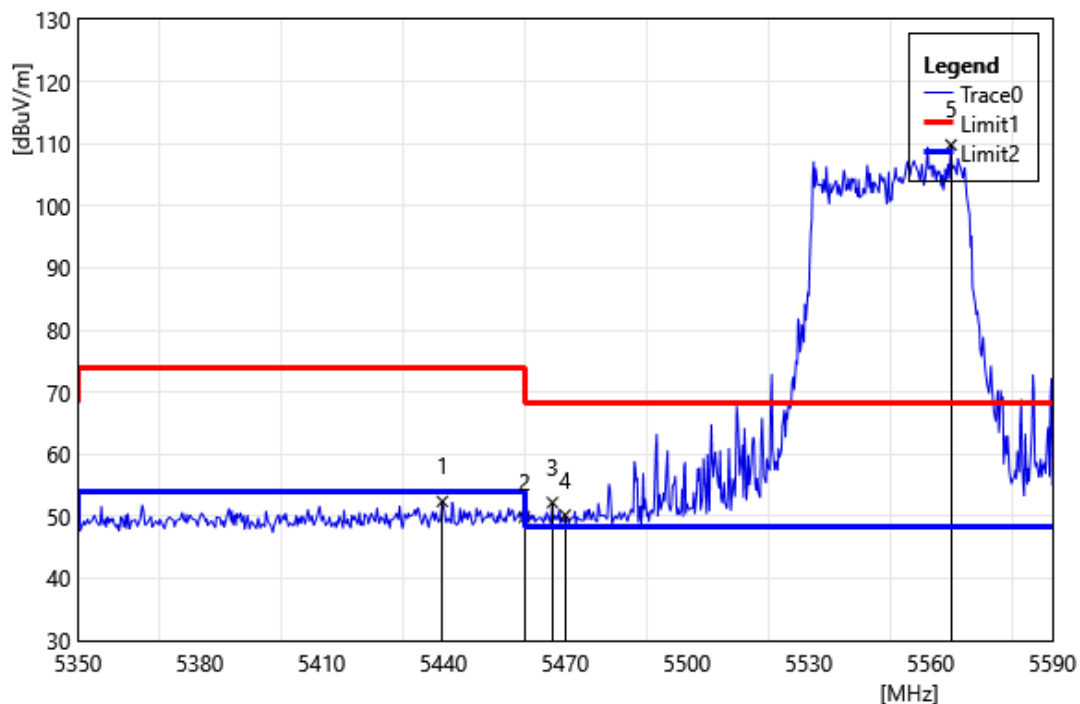


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5439.76	53.06	-0.66	52.40	74.00	-21.60	PEAK
2	5460.00	50.43	-0.57	49.86	74.00	-24.14	PEAK
3	5466.88	52.79	-0.57	52.22	68.20	-15.98	PEAK
4	5470.00	50.76	-0.56	50.20	68.20	-18.00	PEAK
5	5565.04	110.34	-0.52	109.82	68.20	41.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

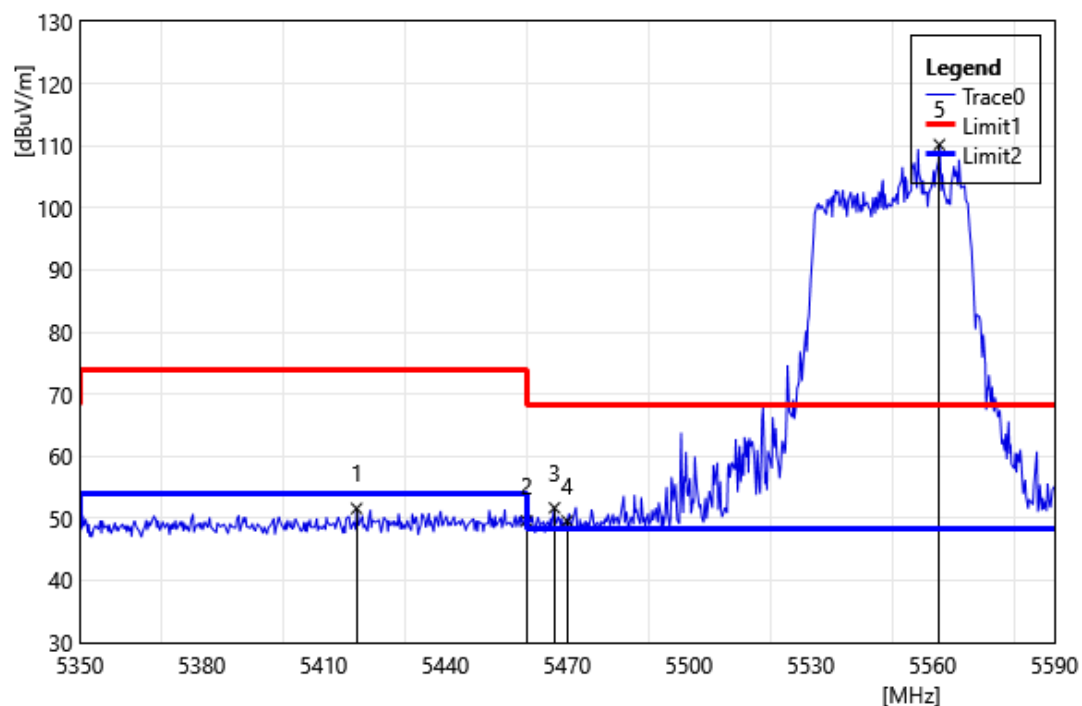


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5418.16	52.39	-0.81	51.58	74.00	-22.42	PEAK
2	5460.00	50.18	-0.57	49.61	74.00	-24.39	PEAK
3	5466.88	52.26	-0.57	51.69	68.20	-16.51	PEAK
4	5470.00	50.12	-0.56	49.56	68.20	-18.64	PEAK
5	5561.68	110.70	-0.52	110.18	68.20	41.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

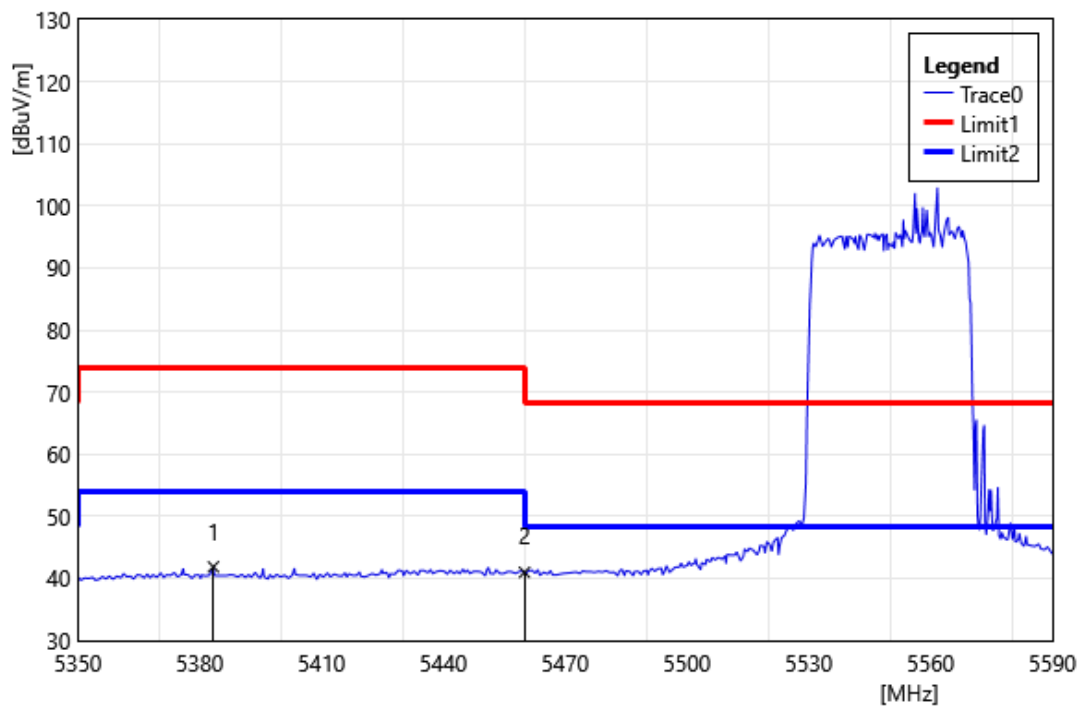


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5383.36	42.93	-1.06	41.87	54.00	-12.13	AVG
2	5460.00	41.56	-0.57	40.99	54.00	-13.01	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

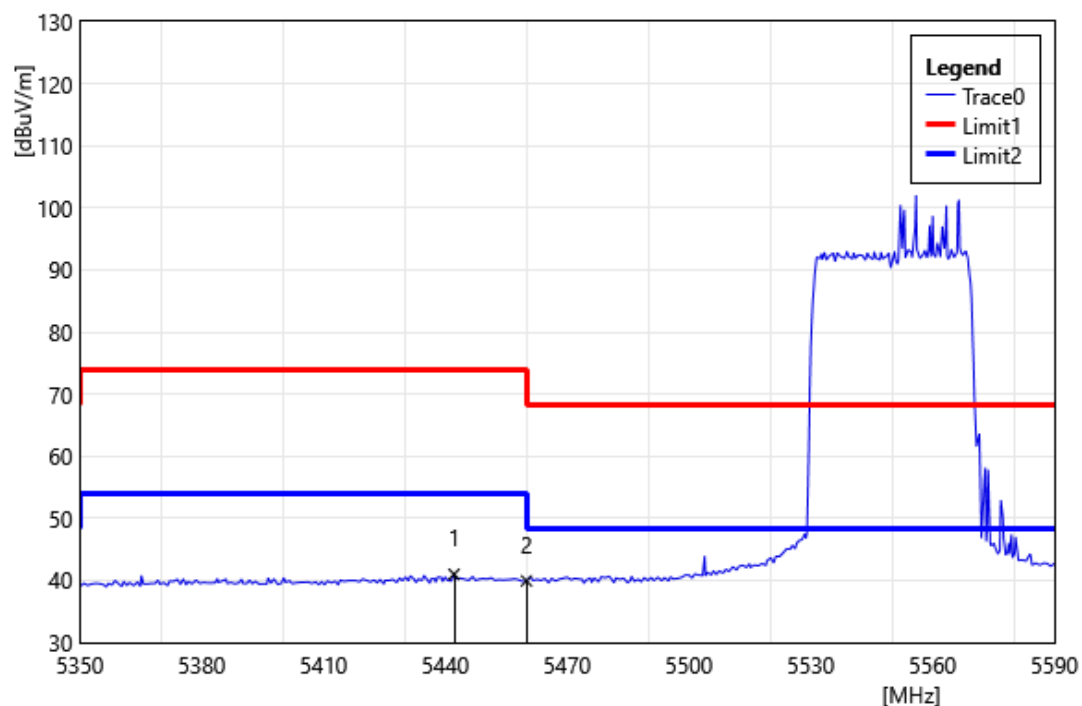


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.16	41.64	-0.64	41.00	54.00	-13.00	AVG
2	5460.00	40.50	-0.57	39.93	54.00	-14.07	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

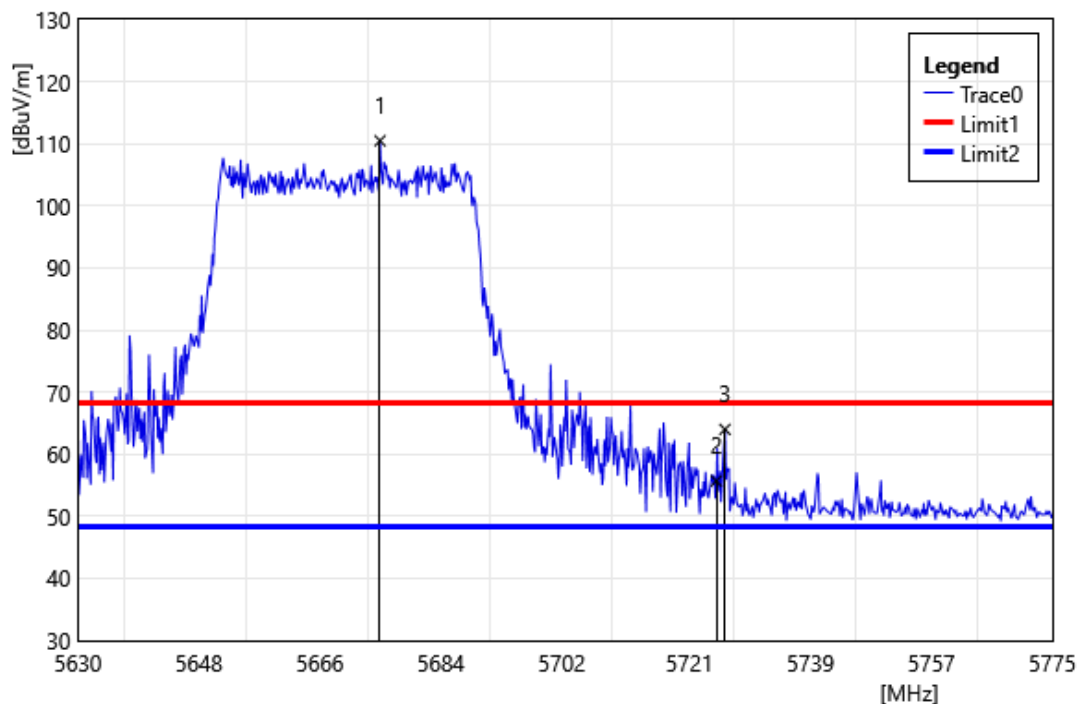


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5674.95	111.10	-0.62	110.49	68.20	42.29	PEAK
2	5725.00	56.05	-0.34	55.71	68.20	-12.49	PEAK
3	5726.28	64.33	-0.33	64.00	68.20	-4.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

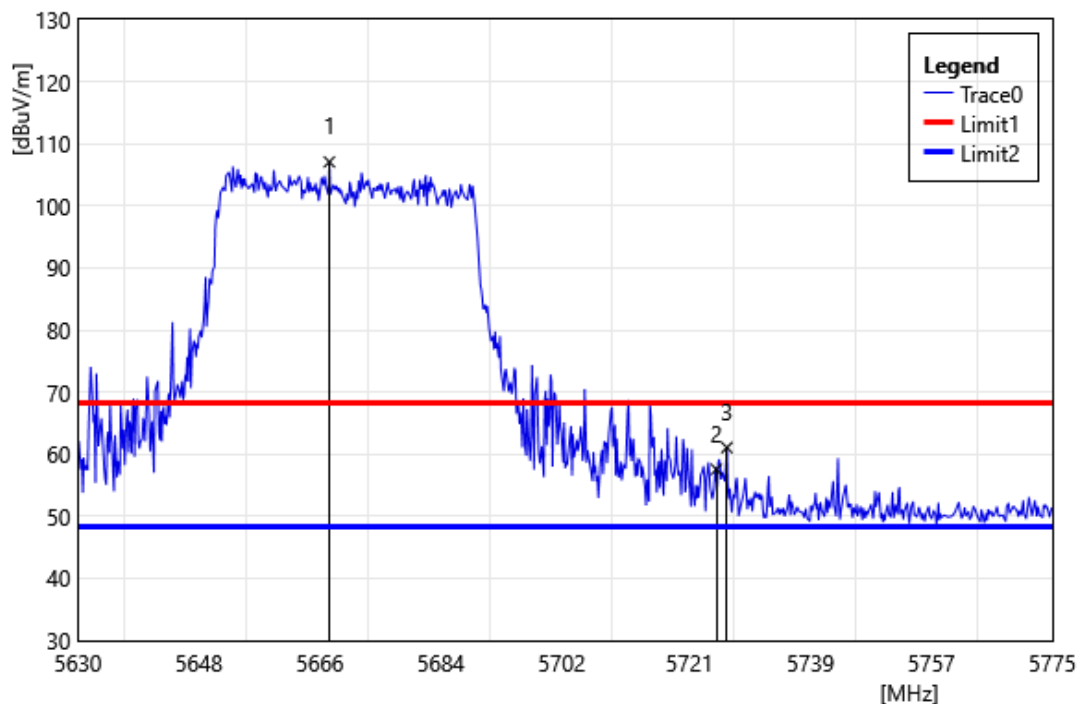


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5667.41	107.71	-0.63	107.08	68.20	38.88	PEAK
2	5725.00	57.91	-0.34	57.57	68.20	-10.63	PEAK
3	5726.57	61.40	-0.33	61.07	68.20	-7.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

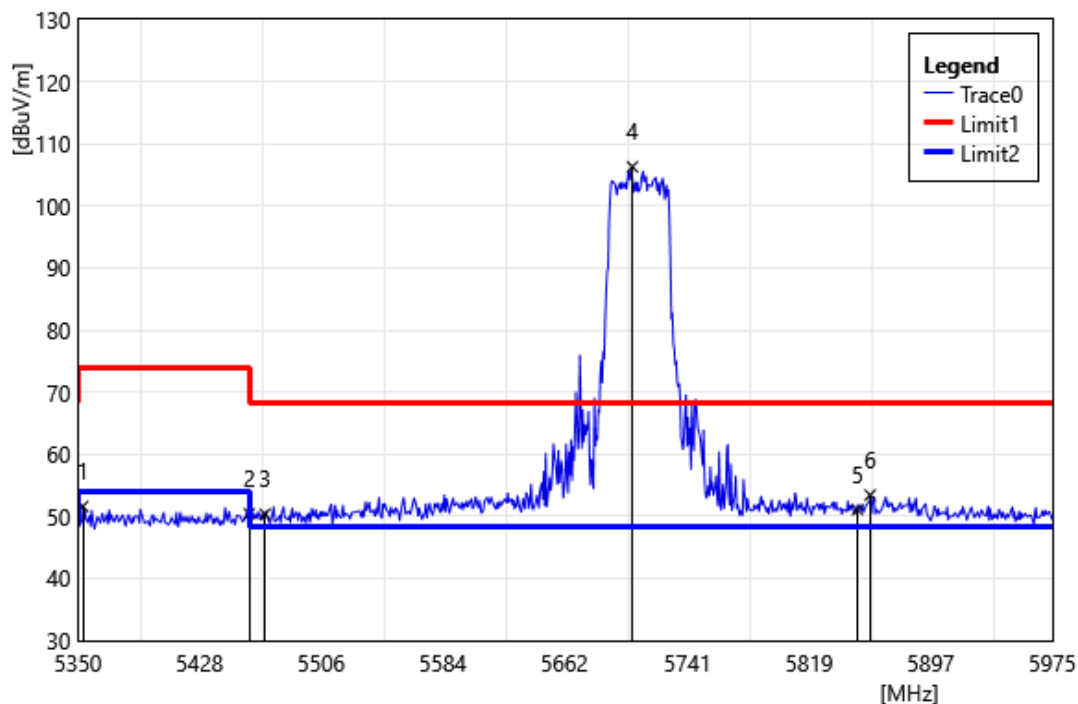


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5353.13	52.85	-1.27	51.58	74.00	-22.42	PEAK
2	5460.00	50.97	-0.57	50.40	74.00	-23.60	PEAK
3	5470.00	50.92	-0.56	50.36	68.20	-17.84	PEAK
4	5705.63	106.85	-0.55	106.30	68.20	38.10	PEAK
5	5850.00	50.80	0.28	51.08	68.20	-17.12	PEAK
6	5858.13	53.13	0.30	53.43	68.20	-14.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

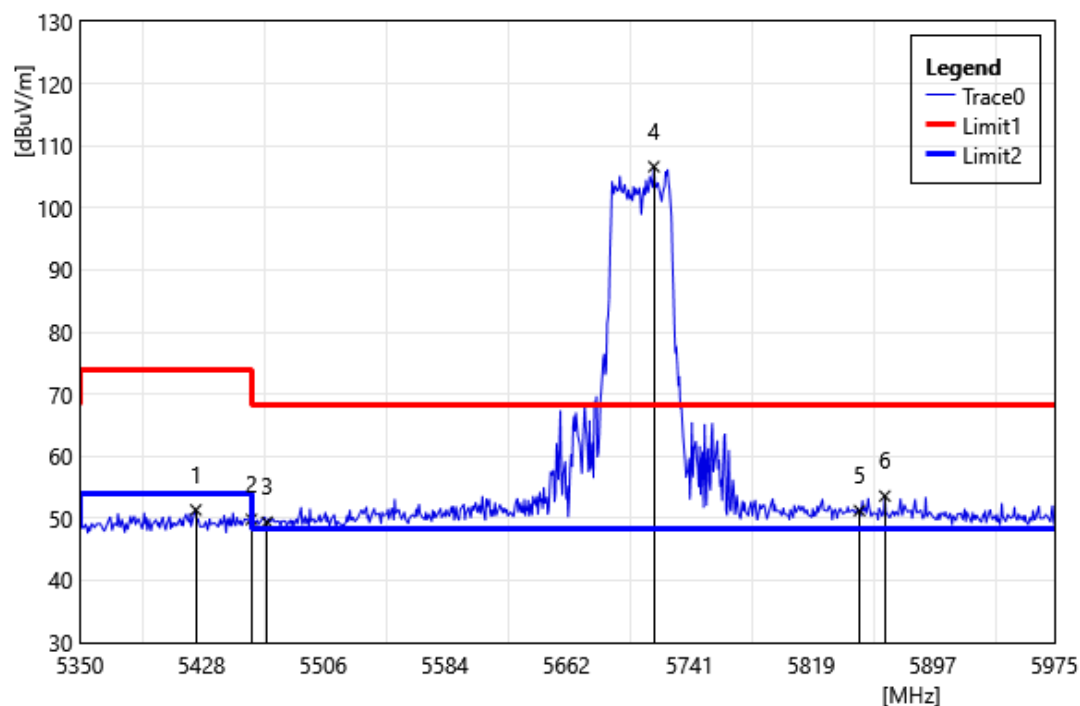


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5424.38	52.12	-0.77	51.35	74.00	-22.65	PEAK
2	5460.00	50.39	-0.57	49.82	74.00	-24.18	PEAK
3	5470.00	49.95	-0.56	49.39	68.20	-18.81	PEAK
4	5718.13	107.07	-0.42	106.65	68.20	38.45	PEAK
5	5850.00	50.96	0.28	51.24	68.20	-16.96	PEAK
6	5866.25	53.27	0.32	53.59	68.20	-14.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

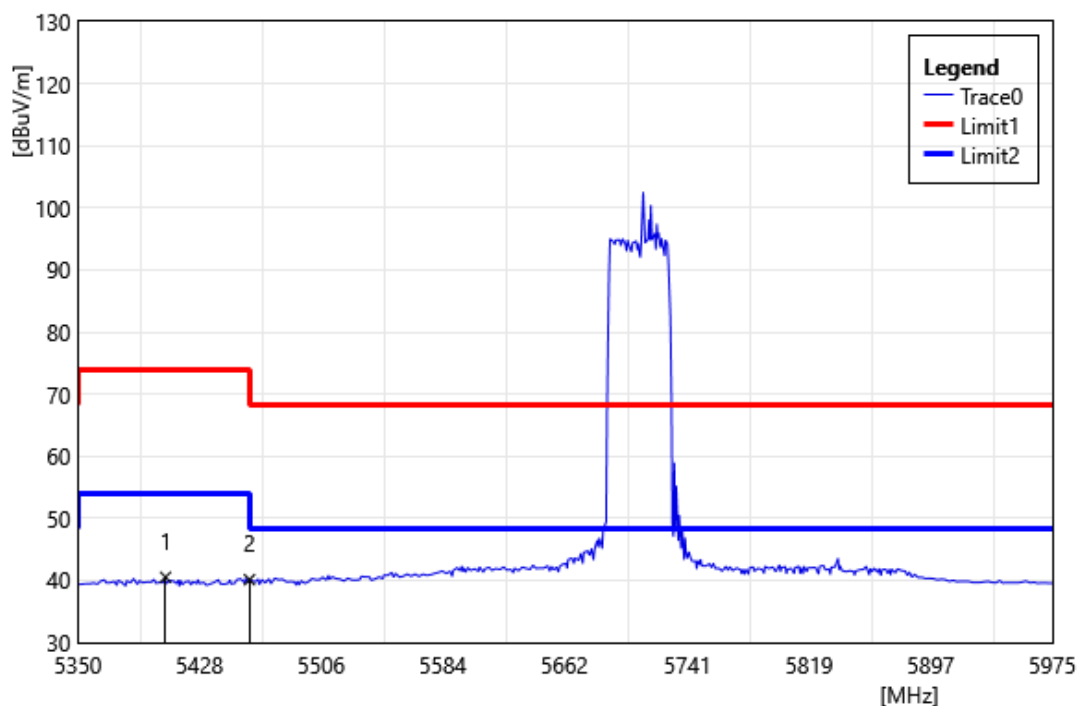


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5406.25	41.41	-0.89	40.52	54.00	-13.48	AVG
2	5460.00	40.69	-0.57	40.12	54.00	-13.88	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

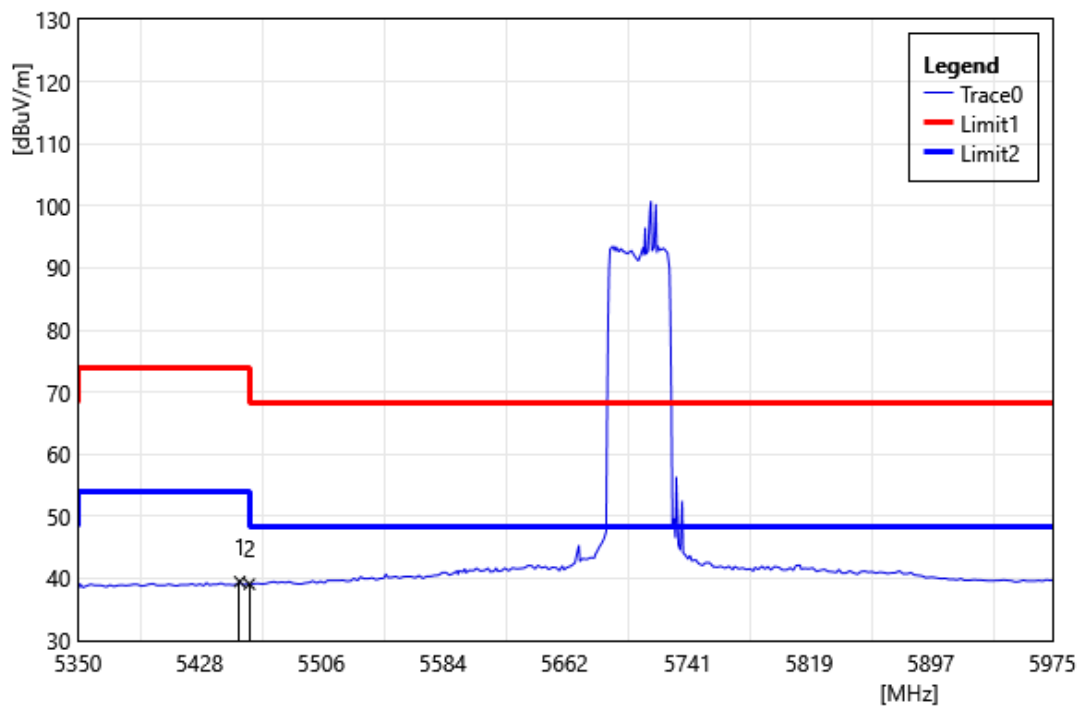


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.75	40.07	-0.58	39.49	54.00	-14.51	AVG
2	5460.00	39.66	-0.57	39.09	54.00	-14.91	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

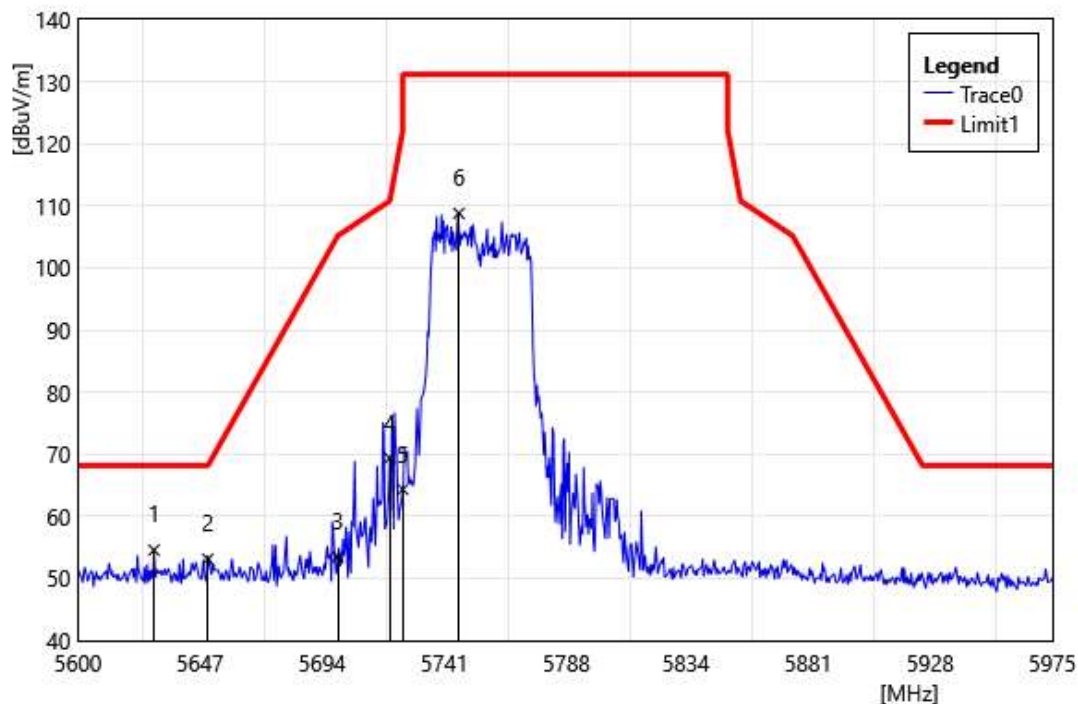


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5629.25	55.18	-0.61	54.57	68.20	-13.63	PEAK
2	5650.00	53.75	-0.64	53.11	68.20	-15.09	PEAK
3	5700.00	54.06	-0.61	53.45	105.20	-51.75	PEAK
4	5720.00	69.80	-0.40	69.40	110.80	-41.40	PEAK
5	5725.00	64.69	-0.34	64.35	131.20	-66.85	PEAK
6	5746.63	108.92	-0.12	108.80	131.20	-22.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

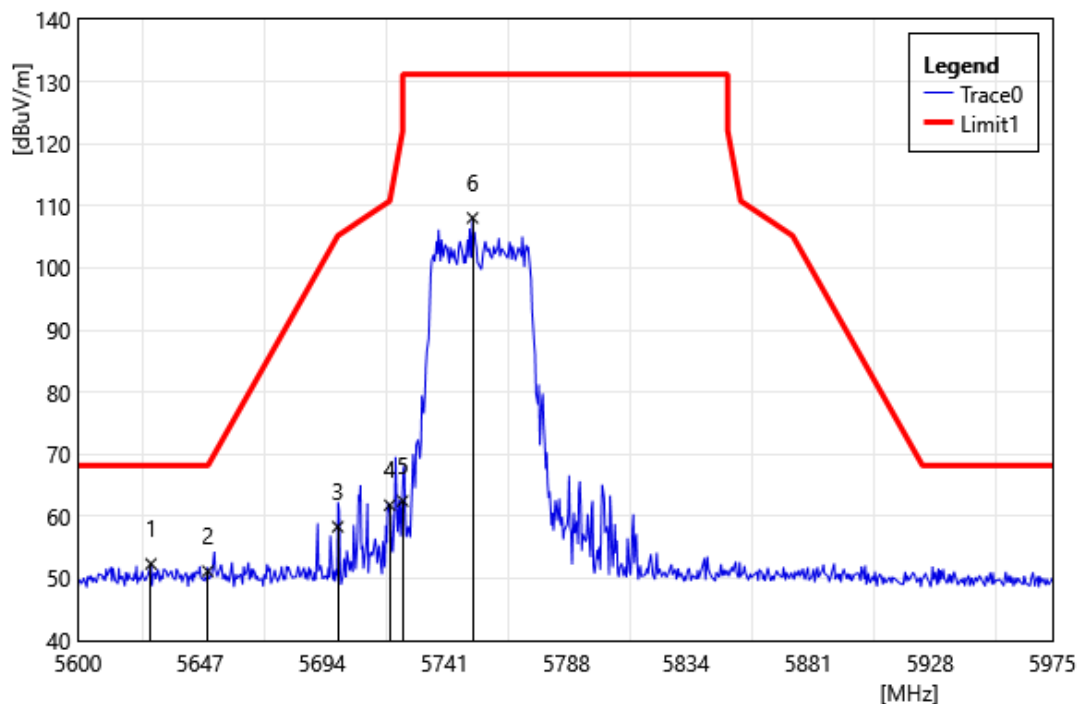


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5628.13	52.96	-0.61	52.35	68.20	-15.85	PEAK
2	5650.00	51.81	-0.64	51.17	68.20	-17.03	PEAK
3	5700.00	58.93	-0.61	58.32	105.20	-46.88	PEAK
4	5720.00	62.19	-0.40	61.79	110.80	-49.01	PEAK
5	5725.00	62.82	-0.34	62.48	131.20	-68.72	PEAK
6	5751.88	108.13	-0.07	108.06	131.20	-23.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

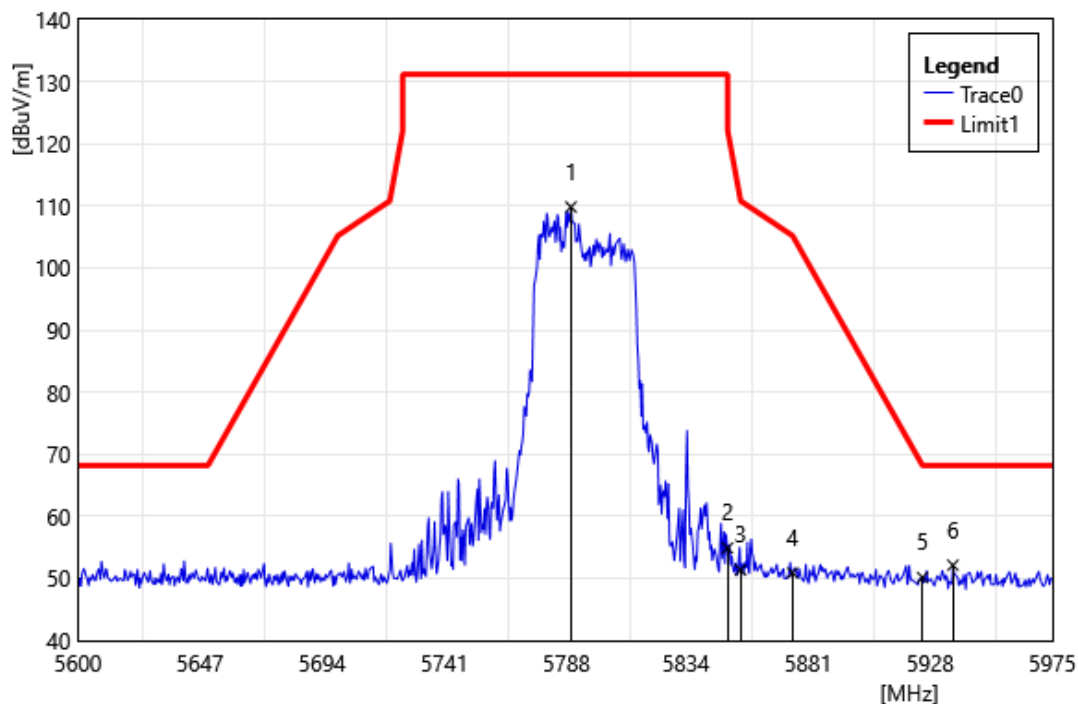


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5789.75	109.73	0.10	109.83	131.20	-21.37	PEAK
2	5850.00	54.63	0.28	54.91	122.20	-67.29	PEAK
3	5855.00	51.08	0.29	51.37	110.80	-59.43	PEAK
4	5875.00	50.55	0.34	50.89	105.20	-54.31	PEAK
5	5925.00	49.88	0.28	50.16	68.20	-18.04	PEAK
6	5936.75	51.92	0.21	52.13	68.20	-16.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5795 MHz		
Polarization:	Horizontal		
Remark:			

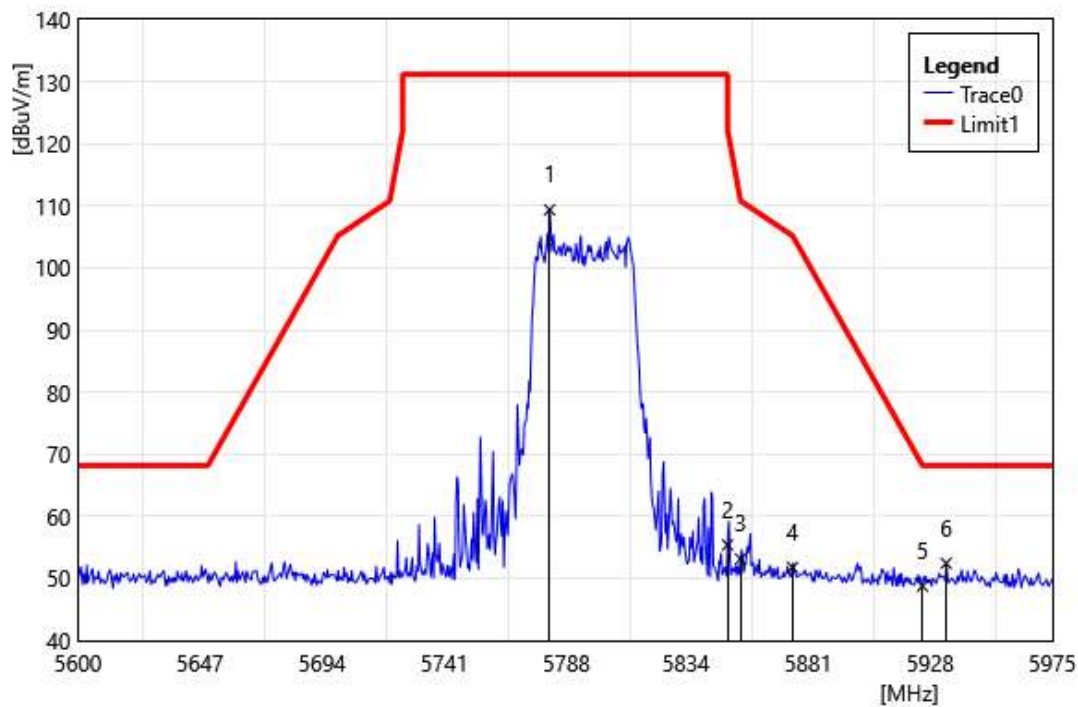


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5781.50	109.31	0.06	109.37	131.20	-21.83	PEAK
2	5850.00	55.10	0.28	55.38	122.20	-66.82	PEAK
3	5855.00	52.85	0.29	53.14	110.80	-57.66	PEAK
4	5875.00	51.43	0.34	51.77	105.20	-53.43	PEAK
5	5925.00	48.50	0.28	48.78	68.20	-19.42	PEAK
6	5934.13	52.22	0.23	52.45	68.20	-15.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

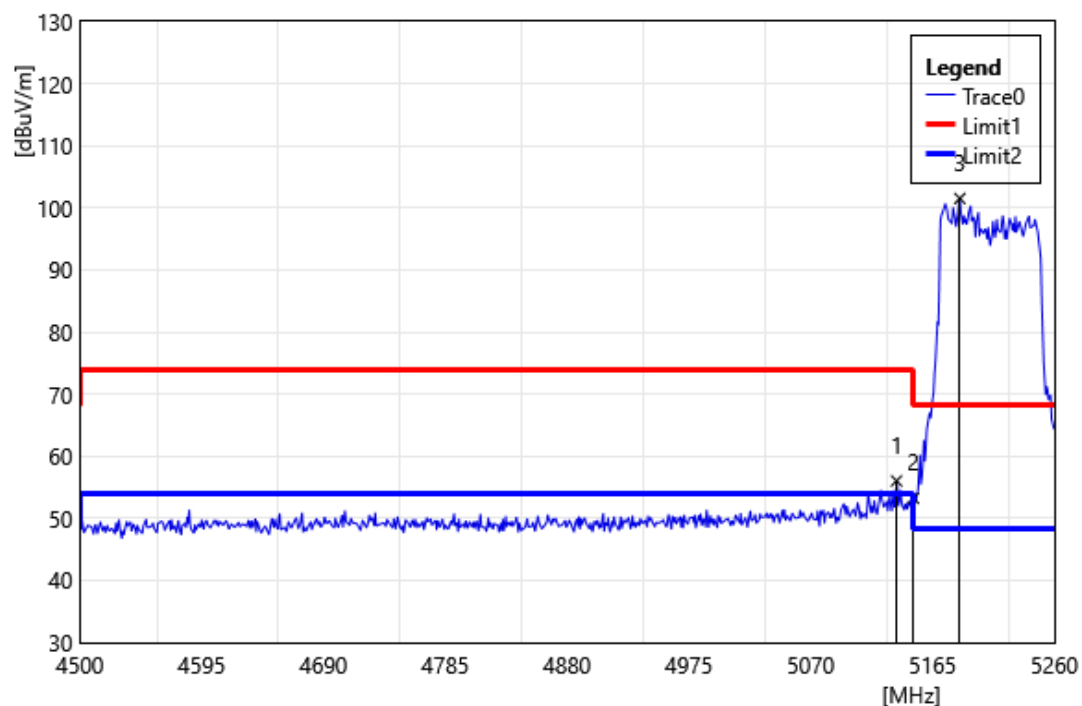


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	56.93	-0.90	56.03	74.00	-17.97	PEAK
2	5150.00	54.15	-0.91	53.24	74.00	-20.76	PEAK
3	5186.28	102.60	-1.09	101.51	68.20	33.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

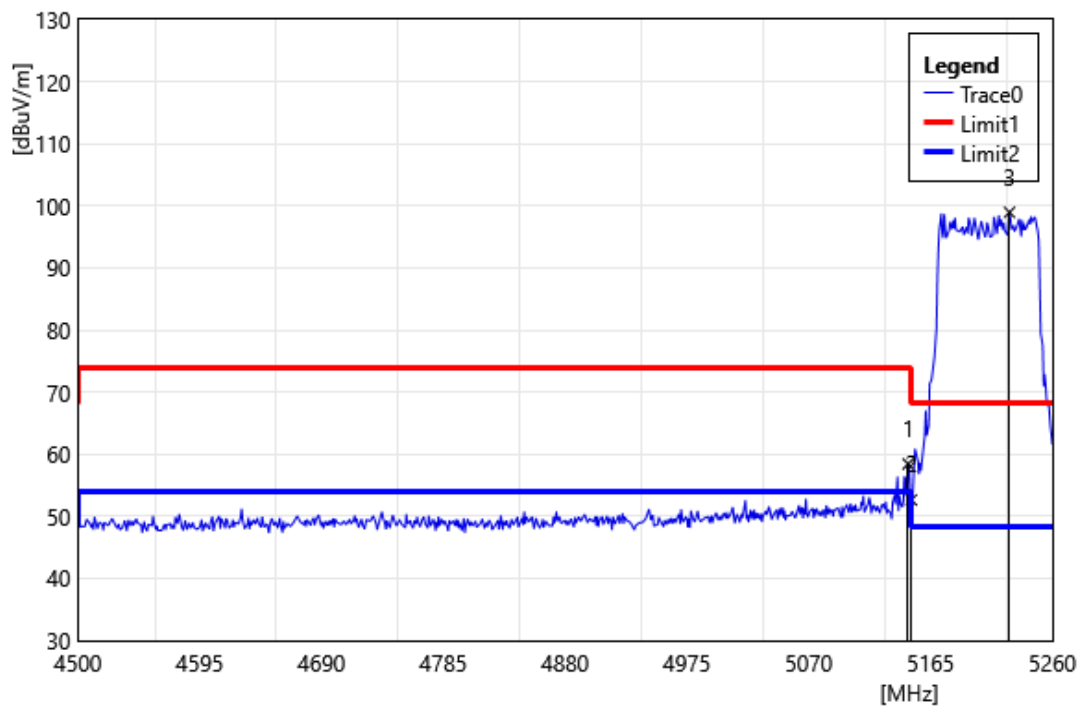


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	59.35	-0.91	58.44	74.00	-15.56	PEAK
2	5150.00	53.56	-0.91	52.65	74.00	-21.35	PEAK
3	5226.56	100.31	-1.34	98.97	68.20	30.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

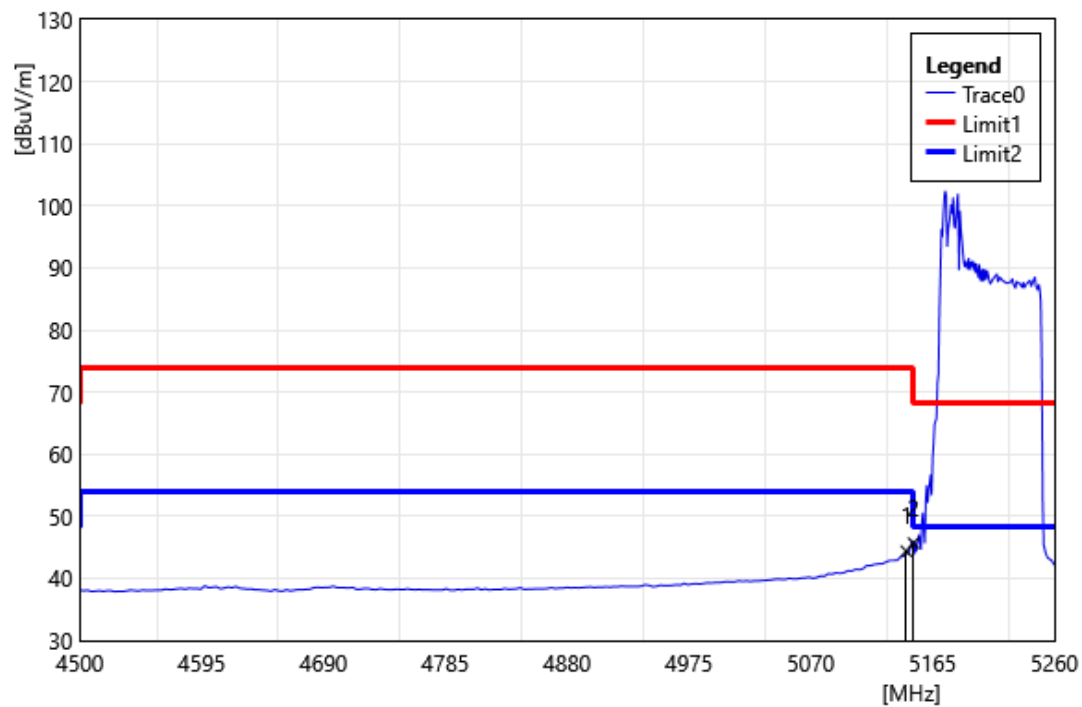


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	45.31	-0.90	44.41	54.00	-9.59	AVG
2	5150.00	46.60	-0.91	45.69	54.00	-8.31	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

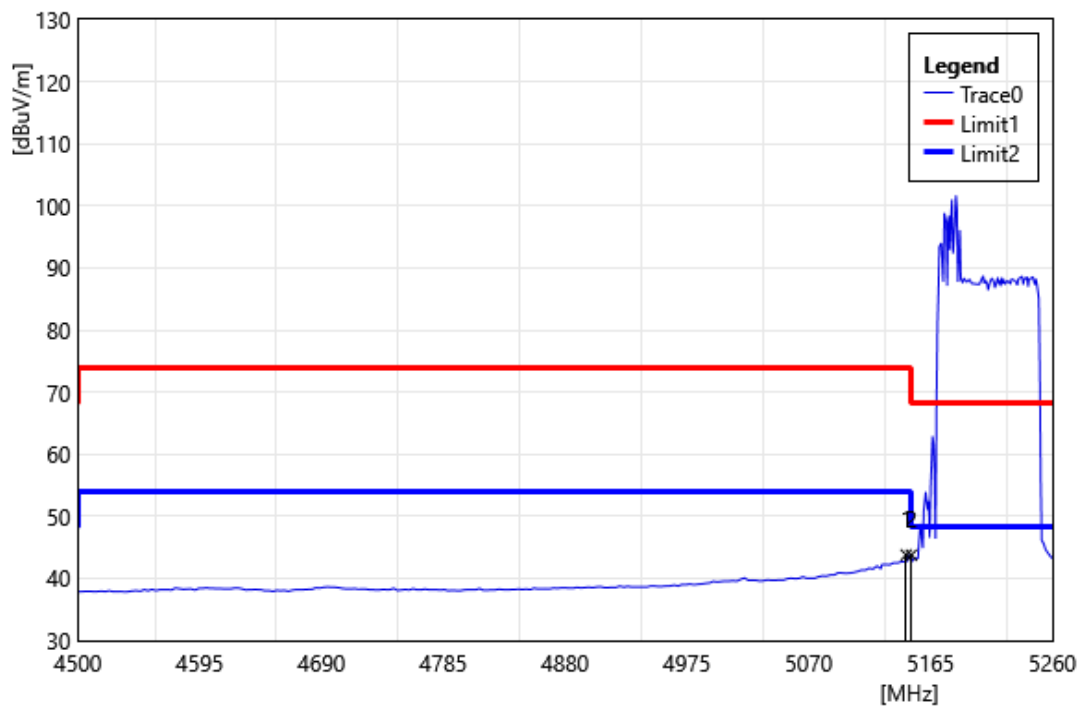


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	44.70	-0.90	43.80	54.00	-10.20	AVG
2	5150.00	44.66	-0.91	43.75	54.00	-10.25	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

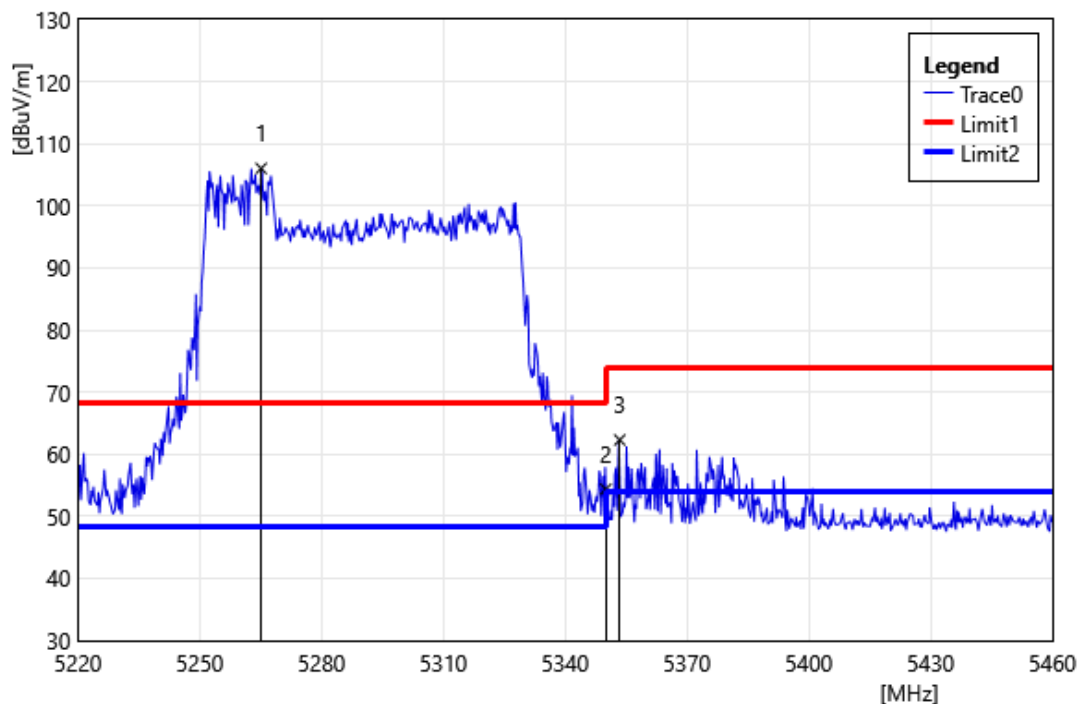


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5265.12	107.58	-1.54	106.04	68.20	37.84	PEAK
2	5350.00	55.66	-1.29	54.37	74.00	-19.63	PEAK
3	5353.44	63.59	-1.27	62.32	74.00	-11.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

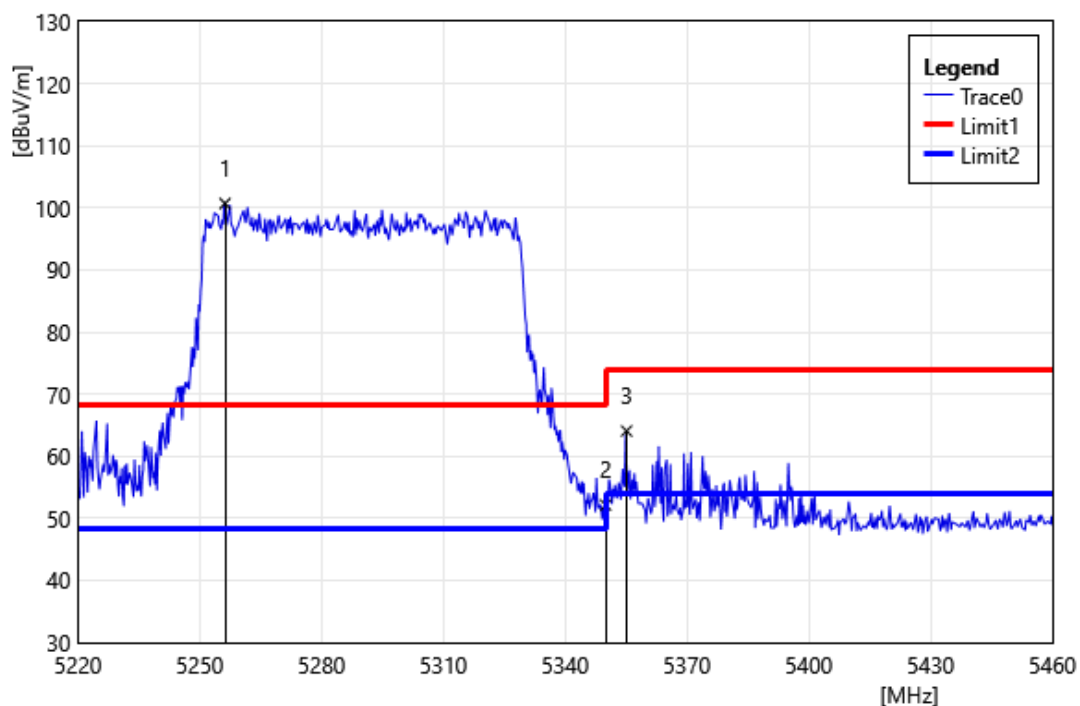


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5256.24	102.22	-1.52	100.71	68.20	32.51	PEAK
2	5350.00	53.44	-1.29	52.15	74.00	-21.86	PEAK
3	5355.12	65.33	-1.26	64.07	74.00	-9.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

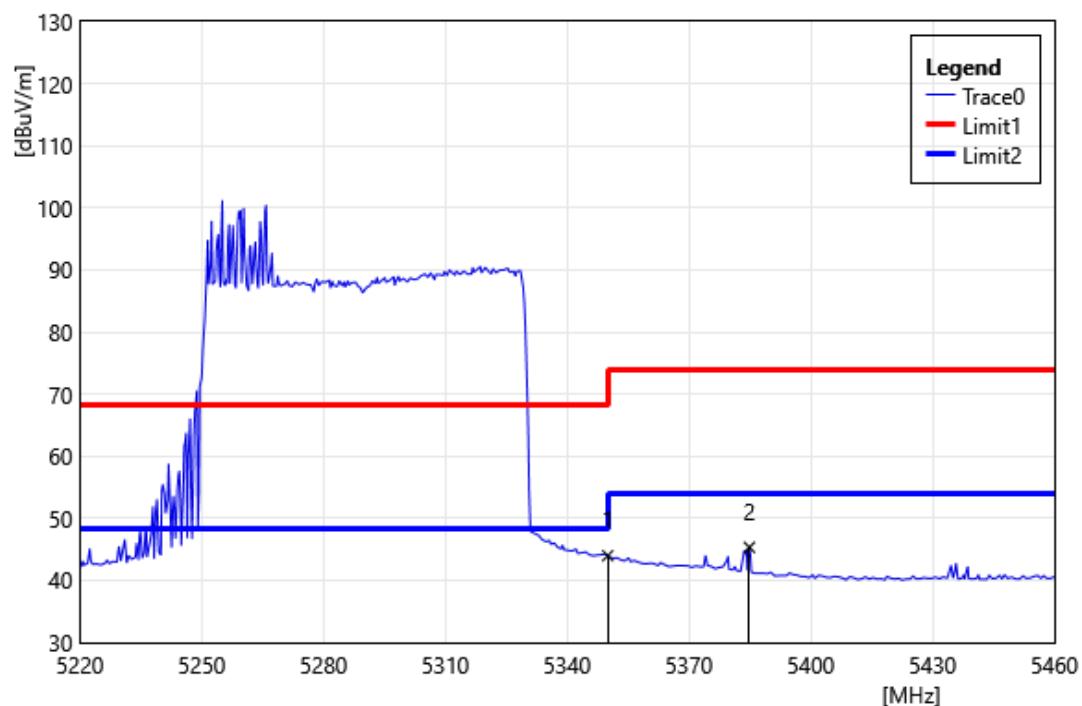


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	45.27	-1.29	43.98	54.00	-10.02	AVG
2	5384.88	46.37	-1.04	45.33	54.00	-8.67	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5290 MHz		
Polarization:	Horizontal		
Remark:			

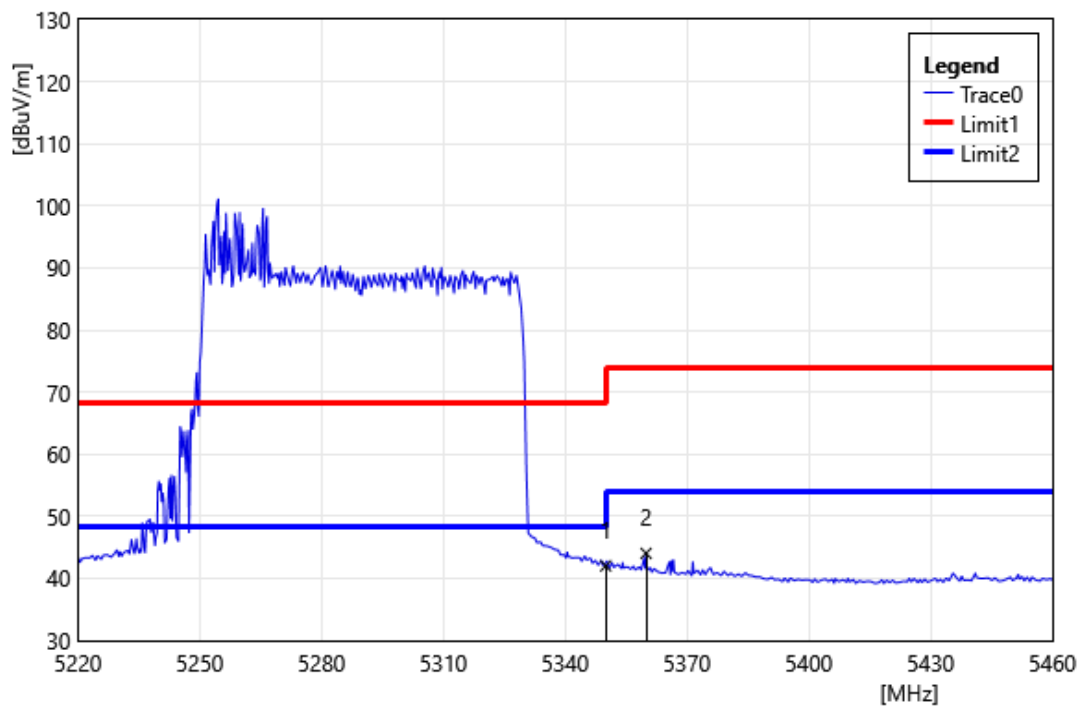


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	43.32	-1.29	42.02	54.00	-11.98	AVG
2	5359.92	45.25	-1.22	44.03	54.00	-9.97	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

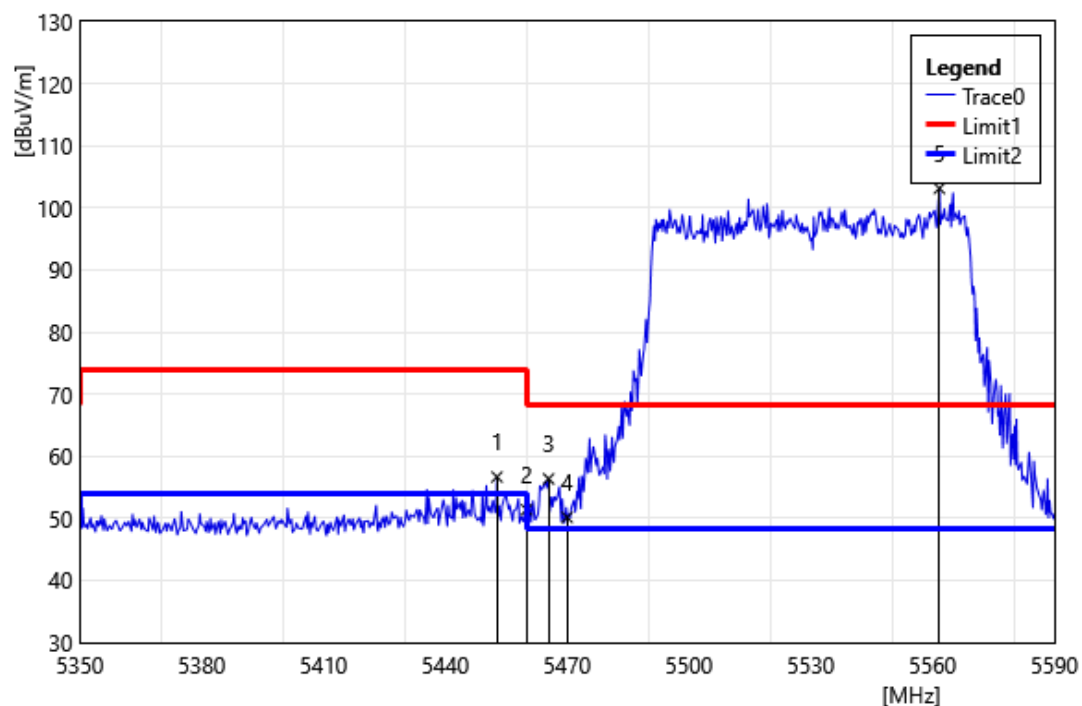


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.72	57.24	-0.58	56.67	74.00	-17.34	PEAK
2	5460.00	51.95	-0.57	51.38	74.00	-22.62	PEAK
3	5465.44	56.93	-0.57	56.36	68.20	-11.84	PEAK
4	5470.00	50.72	-0.56	50.16	68.20	-18.04	PEAK
5	5561.68	103.65	-0.52	103.13	68.20	34.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

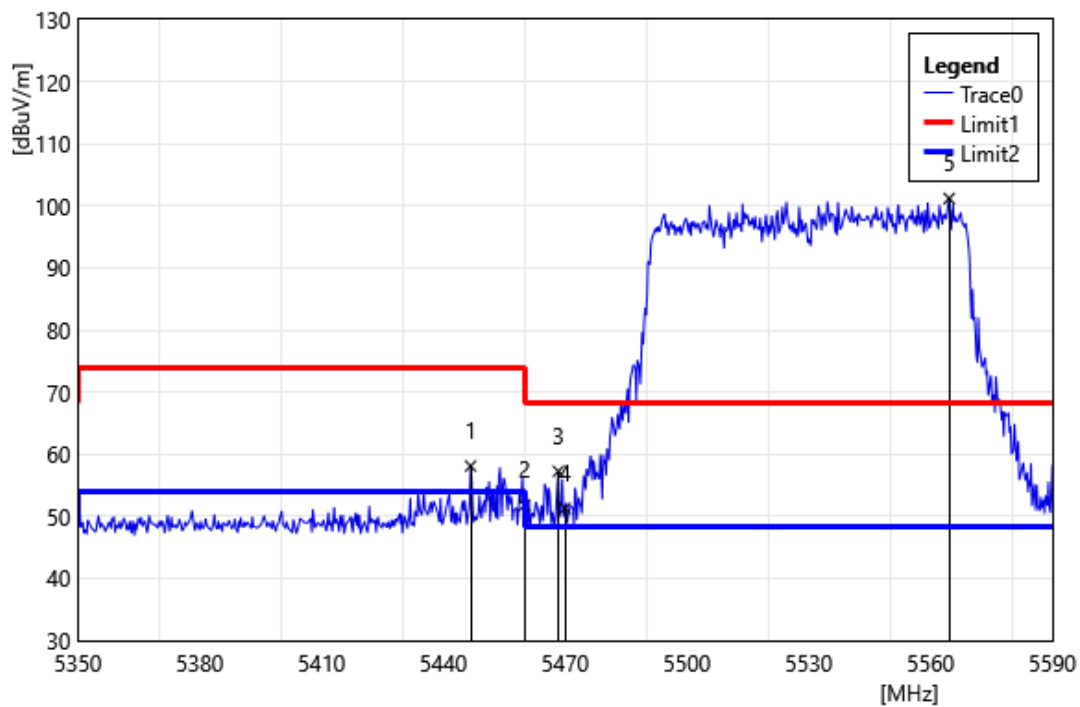


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5446.72	58.72	-0.61	58.11	74.00	-15.89	PEAK
2	5460.00	52.36	-0.57	51.79	74.00	-22.21	PEAK
3	5468.32	57.82	-0.56	57.26	68.20	-10.94	PEAK
4	5470.00	51.86	-0.56	51.30	68.20	-16.90	PEAK
5	5564.56	101.71	-0.52	101.19	68.20	32.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

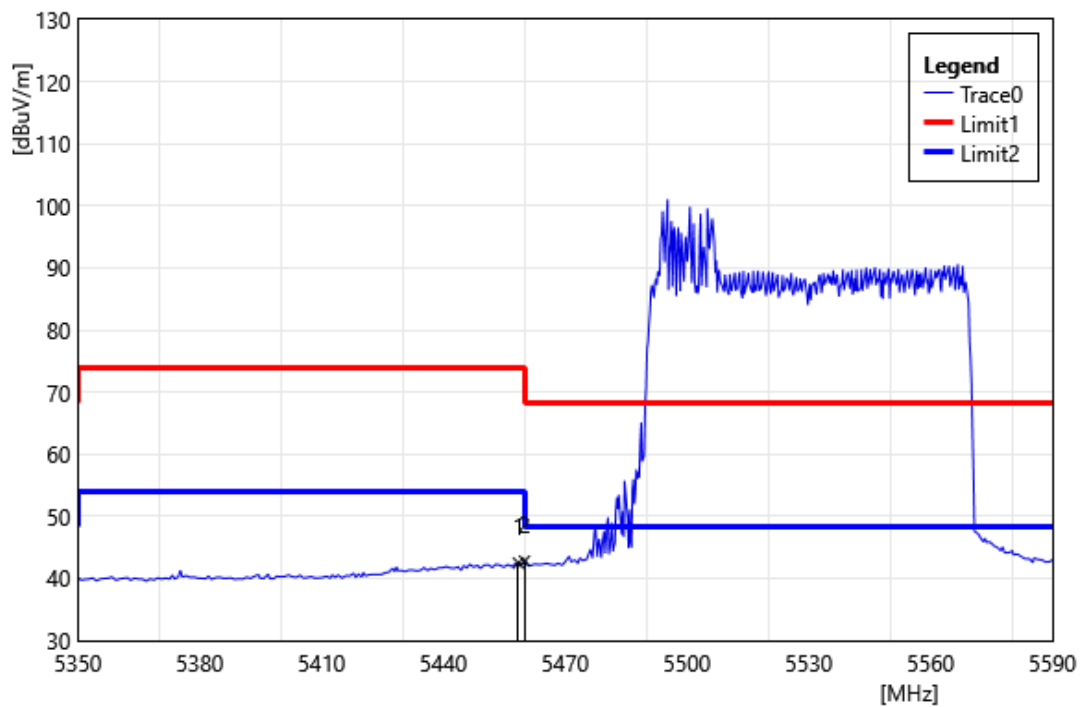


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.48	43.05	-0.57	42.48	54.00	-11.52	AVG
2	5460.00	43.36	-0.57	42.79	54.00	-11.21	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

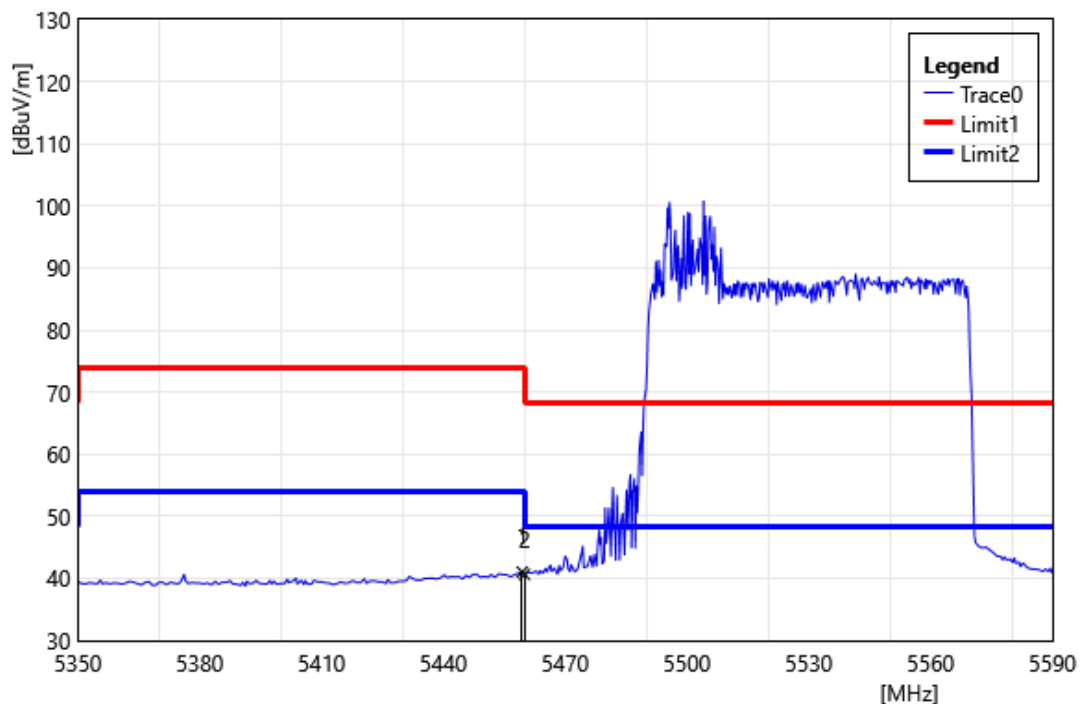


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.44	41.60	-0.57	41.04	54.00	-12.97	AVG
2	5460.00	41.21	-0.57	40.64	54.00	-13.36	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

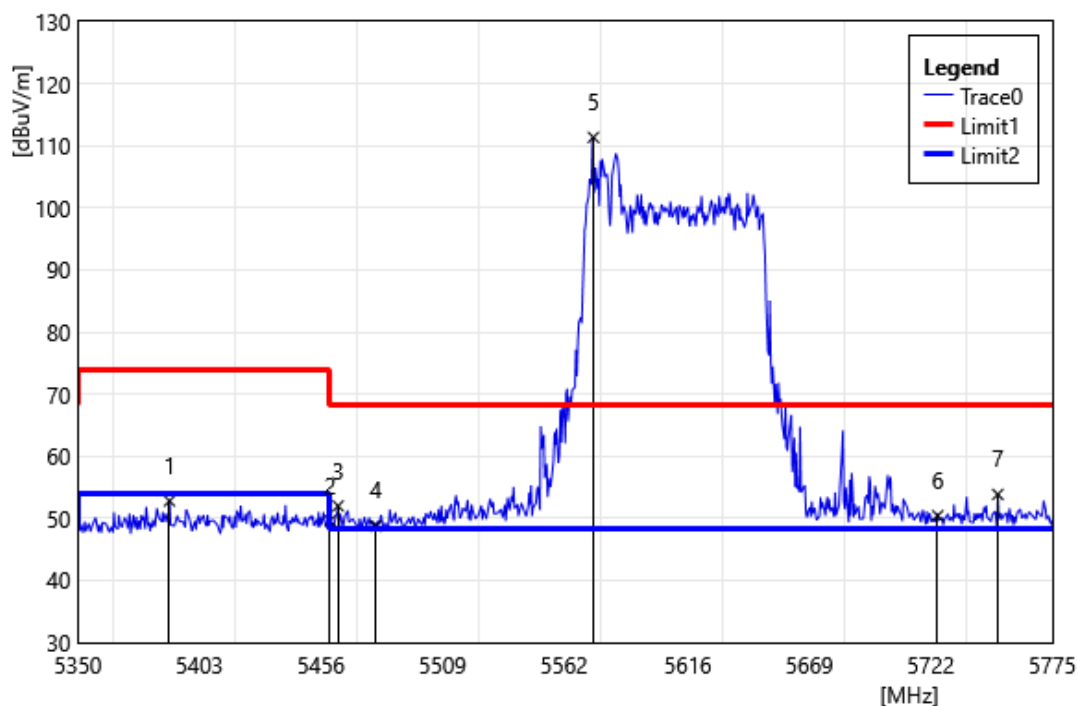


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5389.95	53.82	-1.01	52.81	74.00	-21.19	PEAK
2	5460.00	50.16	-0.57	49.59	74.00	-24.41	PEAK
3	5463.48	52.56	-0.57	51.99	68.20	-16.21	PEAK
4	5480.00	49.30	-0.55	48.75	68.20	-19.45	PEAK
5	5574.83	111.88	-0.53	111.35	68.20	43.15	PEAK
6	5725.00	50.77	-0.34	50.43	68.20	-17.77	PEAK
7	5751.20	53.92	-0.07	53.85	68.20	-14.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

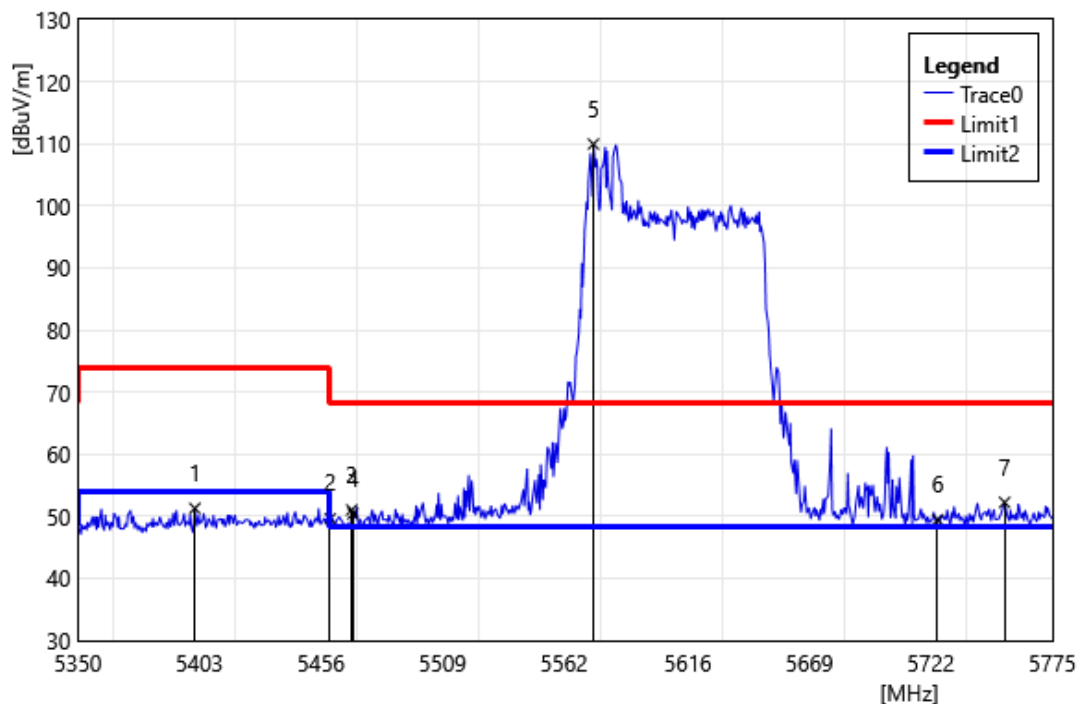


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5401.00	52.22	-0.93	51.29	74.00	-22.71	PEAK
2	5460.00	50.19	-0.57	49.62	74.00	-24.38	PEAK
3	5469.43	51.59	-0.56	51.03	68.20	-17.17	PEAK
4	5470.00	50.98	-0.56	50.42	68.20	-17.78	PEAK
5	5574.83	110.49	-0.53	109.96	68.20	41.76	PEAK
6	5725.00	49.79	-0.34	49.45	68.20	-18.75	PEAK
7	5754.18	52.31	-0.06	52.25	68.20	-15.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

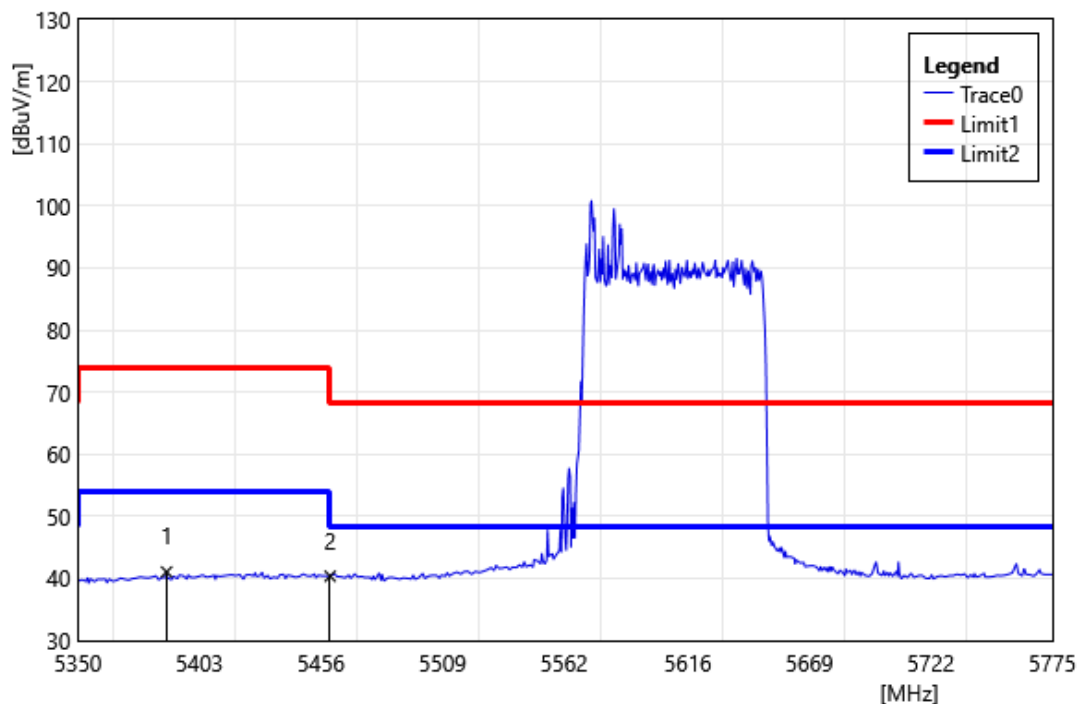


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5388.68	42.07	-1.02	41.05	54.00	-12.95	AVG
2	5460.00	40.94	-0.57	40.37	54.00	-13.64	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

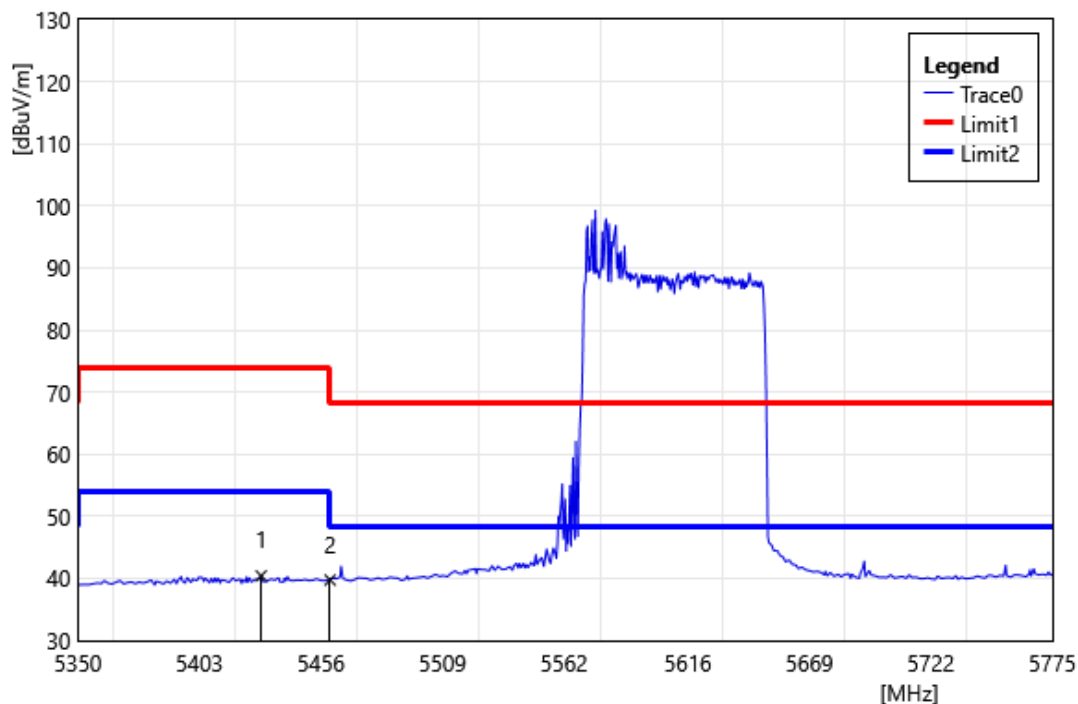


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5429.90	41.14	-0.73	40.41	54.00	-13.59	AVG
2	5460.00	40.31	-0.57	39.74	54.00	-14.26	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

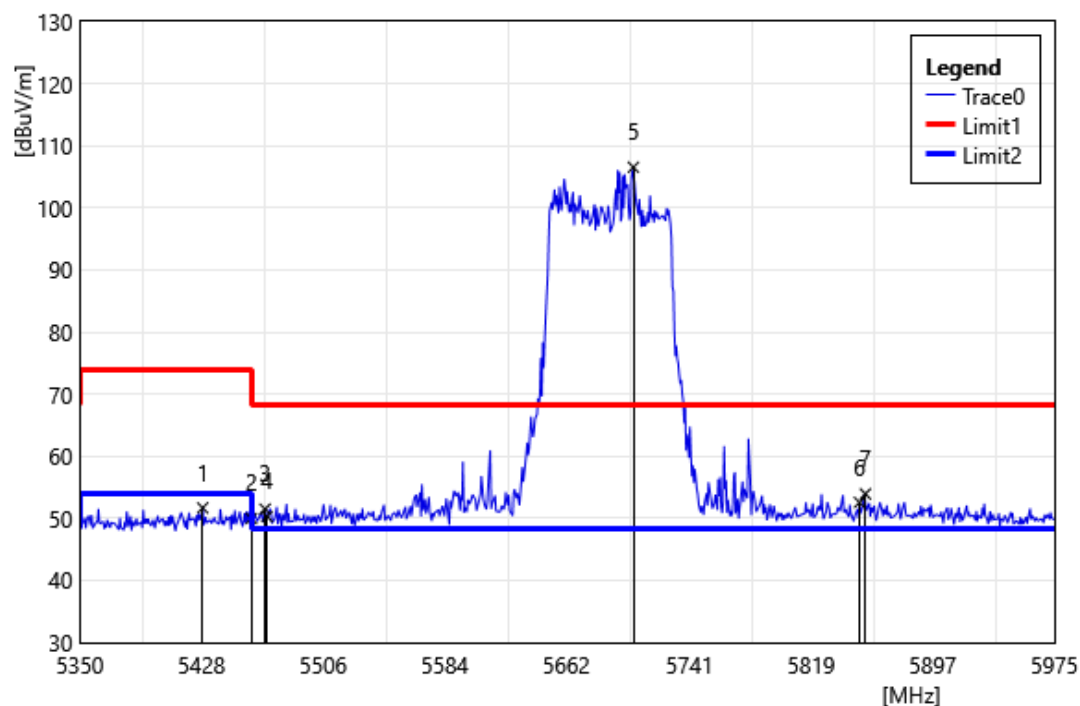


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5428.75	52.42	-0.73	51.69	74.00	-22.31	PEAK
2	5460.00	50.56	-0.57	49.99	74.00	-24.01	PEAK
3	5468.75	52.05	-0.56	51.49	68.20	-16.71	PEAK
4	5470.00	50.87	-0.56	50.31	68.20	-17.89	PEAK
5	5705.00	107.11	-0.56	106.55	68.20	38.35	PEAK
6	5850.00	52.28	0.28	52.56	68.20	-15.64	PEAK
7	5853.75	53.65	0.29	53.94	68.20	-14.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

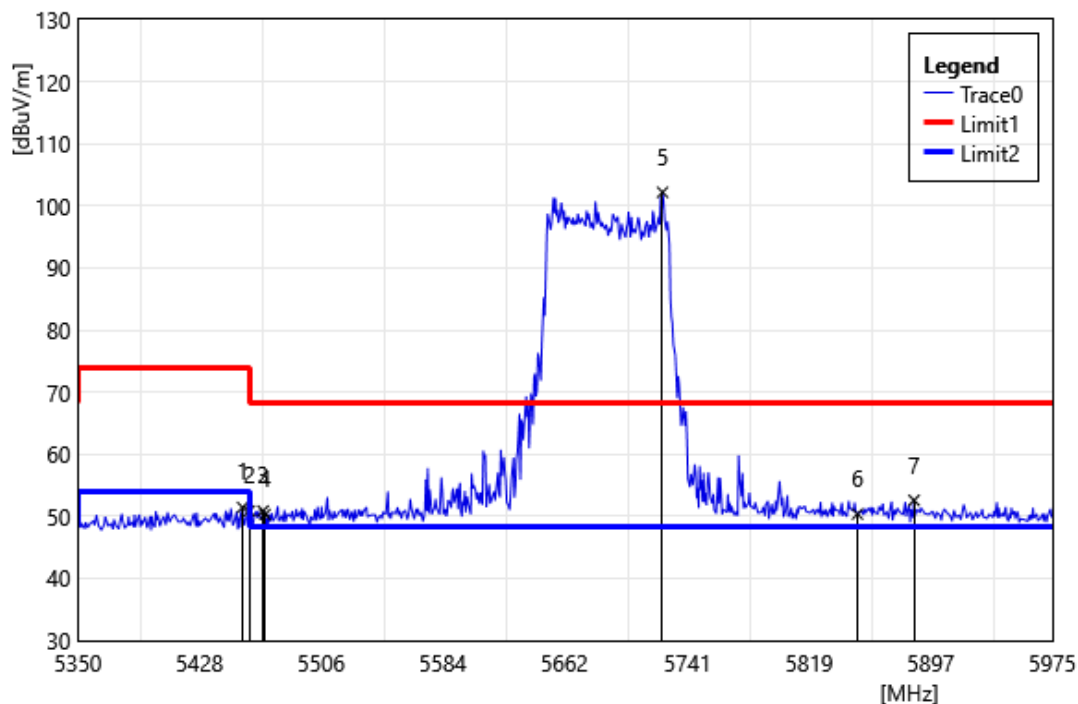


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.63	52.01	-0.58	51.43	74.00	-22.57	PEAK
2	5460.00	51.45	-0.57	50.88	74.00	-23.12	PEAK
3	5468.75	51.43	-0.56	50.87	68.20	-17.33	PEAK
4	5470.00	50.86	-0.56	50.30	68.20	-17.90	PEAK
5	5725.00	102.53	-0.34	102.19	68.20	33.99	PEAK
6	5850.00	50.10	0.28	50.38	68.20	-17.82	PEAK
7	5886.25	52.21	0.37	52.58	68.20	-15.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

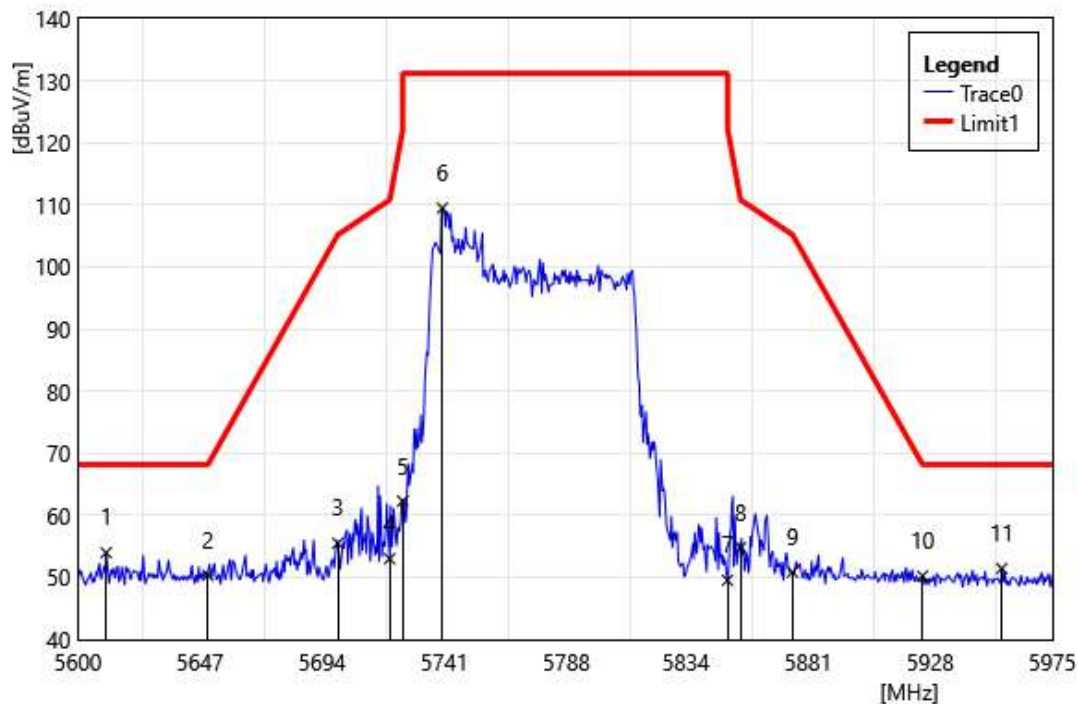


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5610.88	54.57	-0.59	53.98	68.20	-14.22	PEAK
2	5650.00	50.98	-0.64	50.34	68.20	-17.86	PEAK
3	5700.00	56.11	-0.61	55.50	105.20	-49.70	PEAK
4	5720.00	53.42	-0.40	53.02	110.80	-57.78	PEAK
5	5725.00	62.62	-0.34	62.28	131.20	-68.92	PEAK
6	5740.25	109.66	-0.18	109.48	131.20	-21.72	PEAK
7	5850.00	49.26	0.28	49.54	122.20	-72.66	PEAK
8	5855.00	54.51	0.29	54.80	110.80	-56.00	PEAK
9	5875.00	50.52	0.34	50.86	105.20	-54.34	PEAK
10	5925.00	49.95	0.28	50.23	68.20	-17.97	PEAK
11	5955.50	51.29	0.15	51.44	68.20	-16.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			

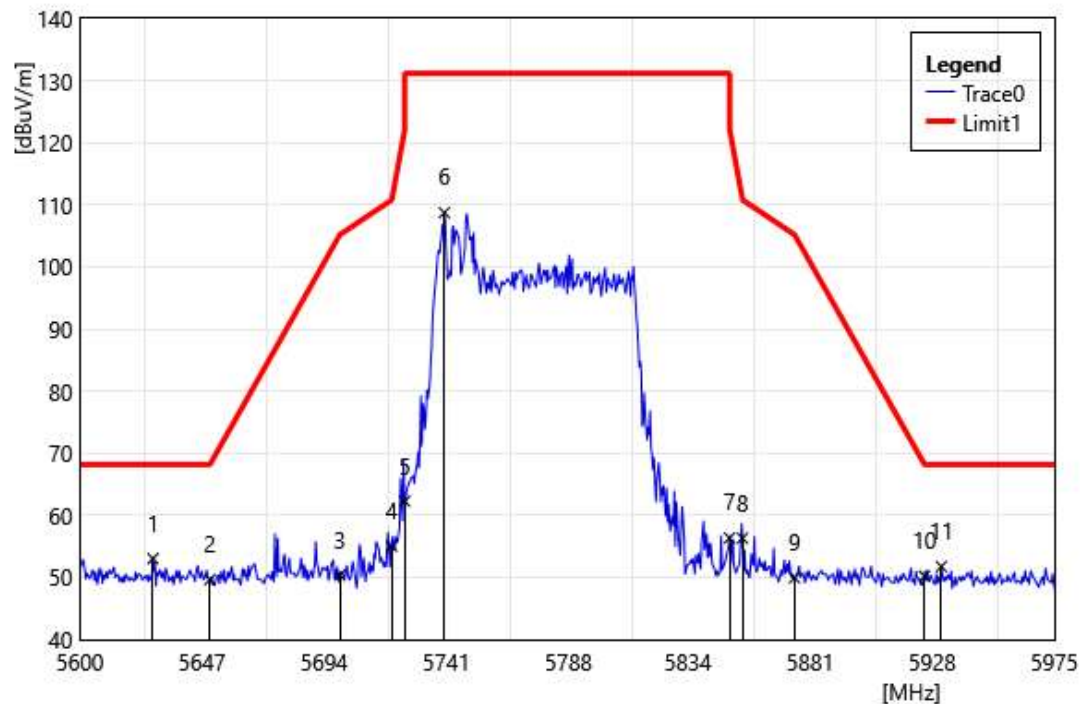


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5628.13	53.64	-0.61	53.03	68.20	-15.17	PEAK
2	5650.00	50.28	-0.64	49.64	68.20	-18.56	PEAK
3	5700.00	50.99	-0.61	50.38	105.20	-54.82	PEAK
4	5720.00	55.44	-0.40	55.04	110.80	-55.76	PEAK
5	5725.00	62.61	-0.34	62.27	131.20	-68.93	PEAK
6	5740.25	108.93	-0.18	108.75	131.20	-22.45	PEAK
7	5850.00	56.08	0.28	56.36	122.20	-65.84	PEAK
8	5855.00	56.04	0.29	56.33	110.80	-54.47	PEAK
9	5875.00	49.60	0.34	49.94	105.20	-55.26	PEAK
10	5925.00	49.93	0.28	50.21	68.20	-17.99	PEAK
11	5931.50	51.51	0.24	51.75	68.20	-16.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

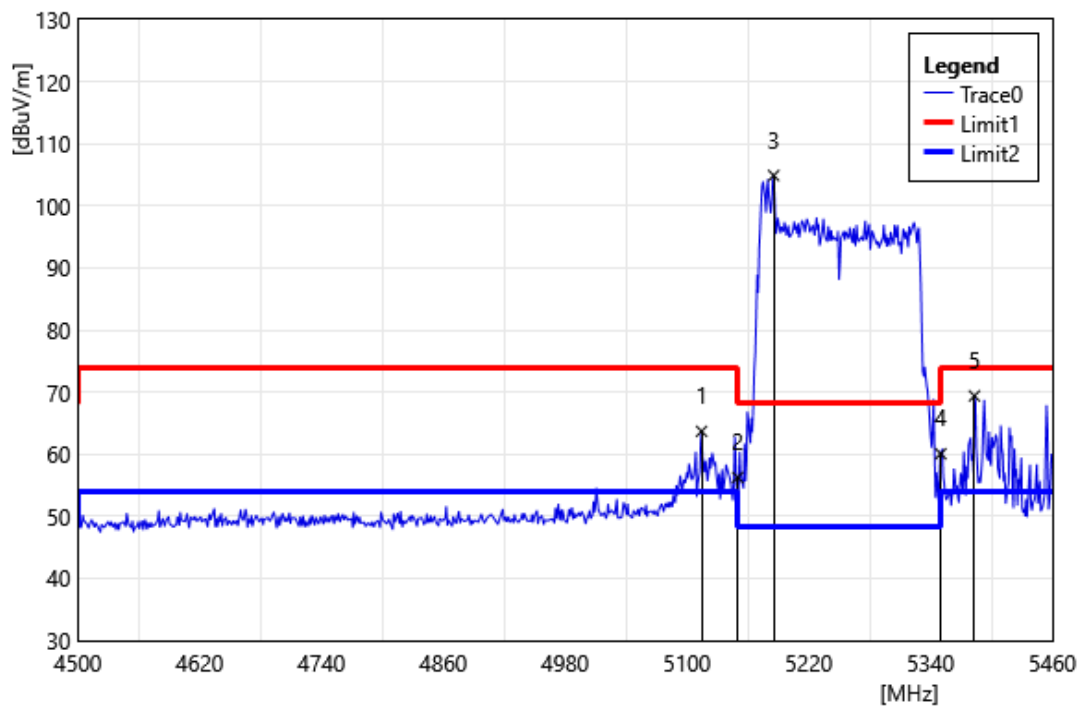


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5114.40	64.57	-0.88	63.69	74.00	-10.31	PEAK
2	5150.00	57.18	-0.91	56.28	74.00	-17.72	PEAK
3	5185.44	105.98	-1.08	104.90	68.20	36.70	PEAK
4	5350.00	61.37	-1.29	60.07	74.00	-13.93	PEAK
5	5383.20	70.46	-1.06	69.40	74.00	-4.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

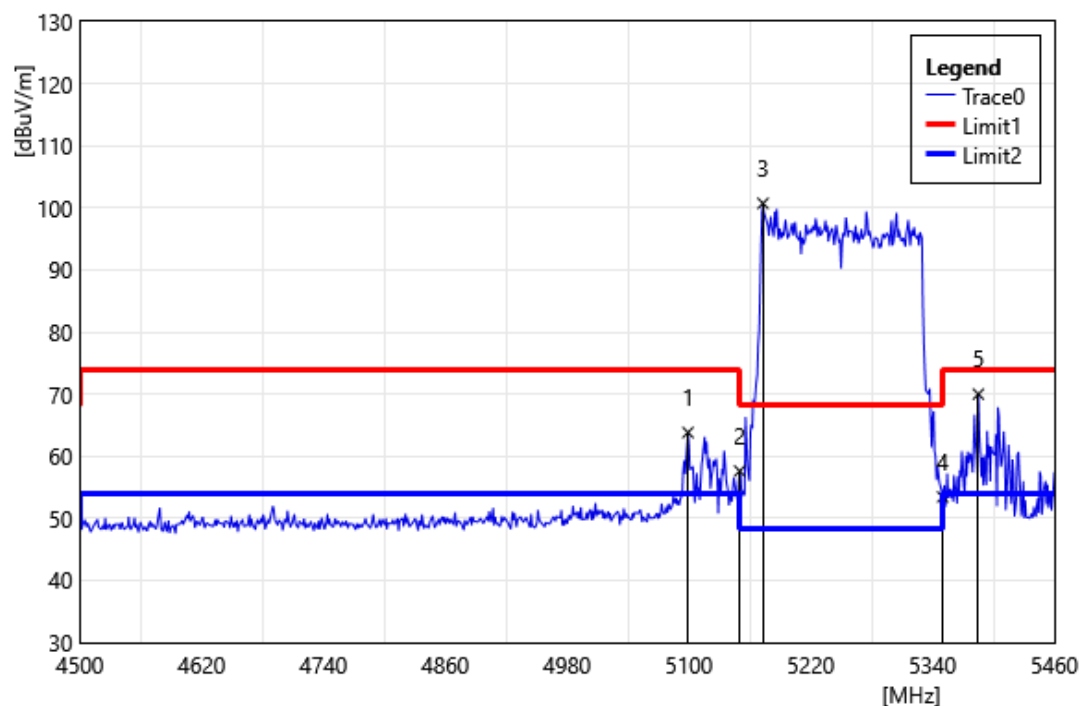


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5099.04	64.70	-0.87	63.83	74.00	-10.17	PEAK
2	5150.00	58.53	-0.91	57.63	74.00	-16.37	PEAK
3	5172.96	101.76	-1.02	100.74	68.20	32.54	PEAK
4	5350.00	54.73	-1.29	53.44	74.00	-20.56	PEAK
5	5385.12	71.06	-1.04	70.02	74.00	-3.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

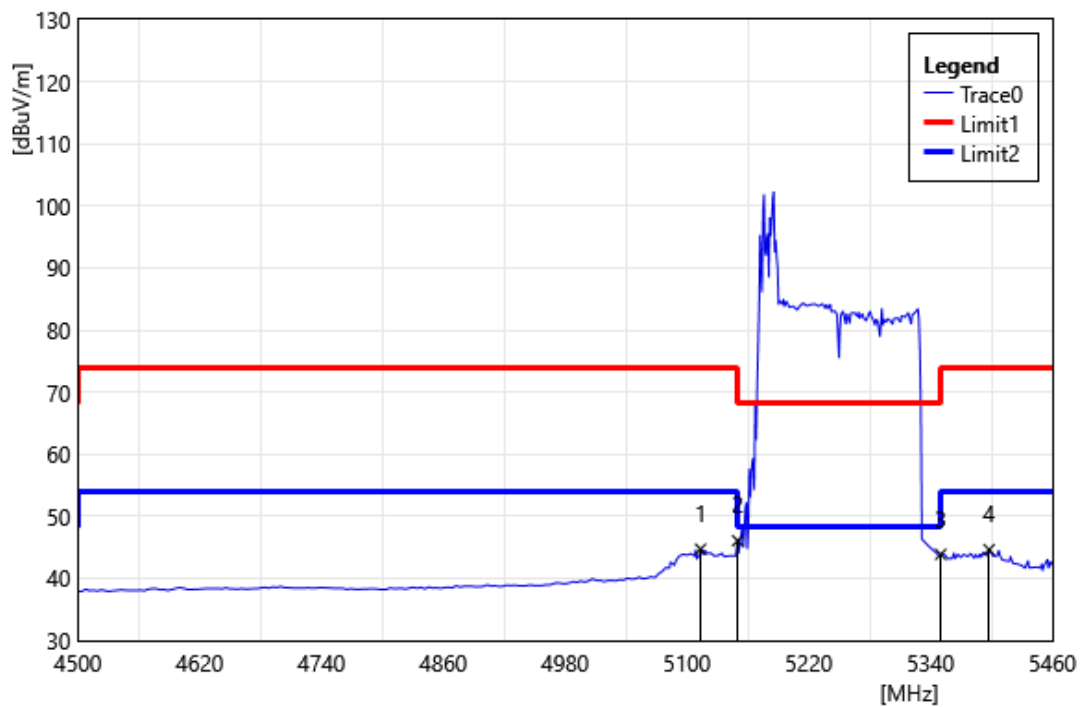


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5113.44	45.60	-0.87	44.73	54.00	-9.27	AVG
2	5150.00	46.98	-0.91	46.07	54.00	-7.93	AVG
3	5350.00	45.18	-1.29	43.89	54.00	-10.11	AVG
4	5397.60	45.60	-0.96	44.65	54.00	-9.36	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

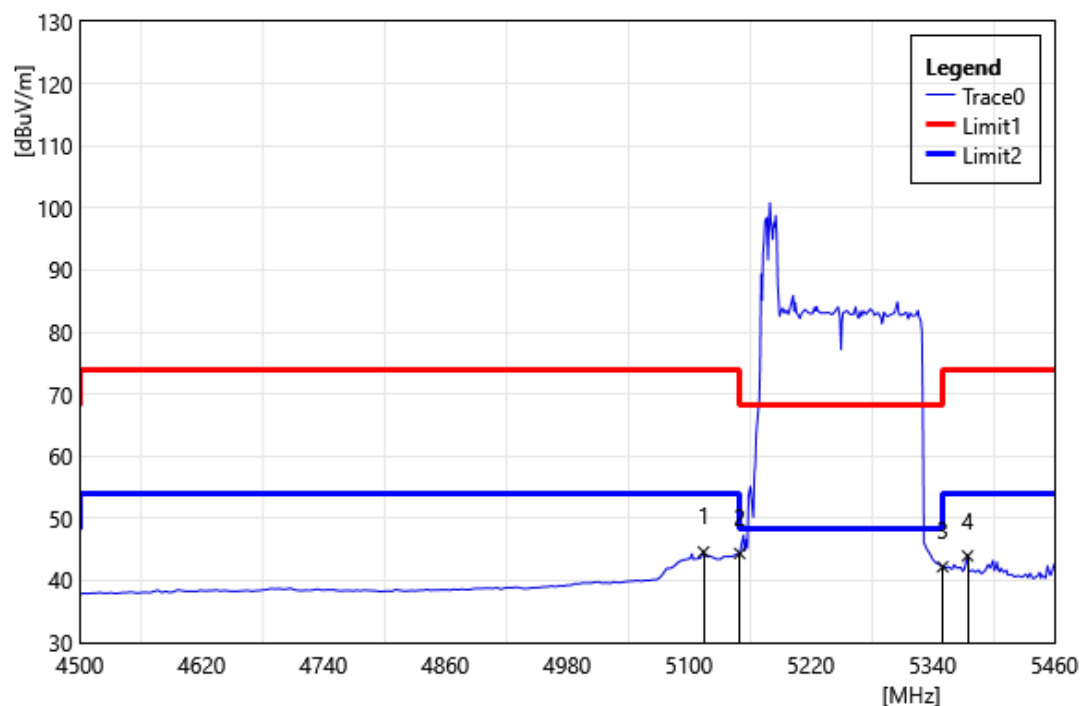


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5114.40	45.47	-0.88	44.59	54.00	-9.41	AVG
2	5150.00	45.26	-0.91	44.35	54.00	-9.65	AVG
3	5350.00	43.49	-1.29	42.20	54.00	-11.80	AVG
4	5374.56	45.06	-1.12	43.94	54.00	-10.06	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

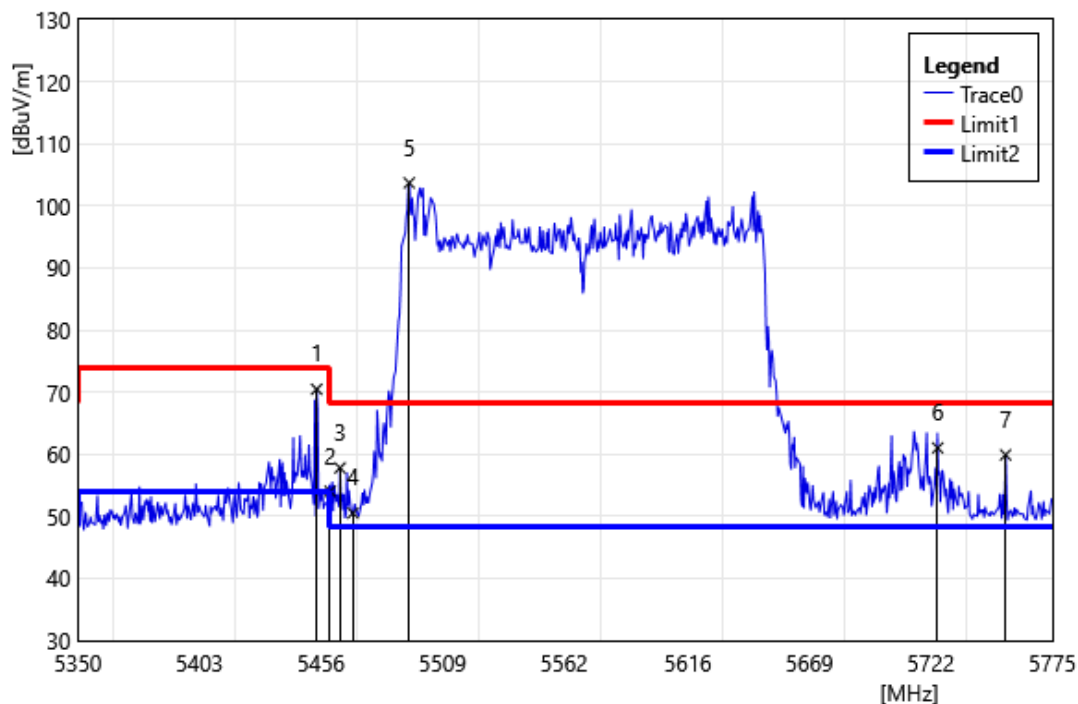


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.13	71.05	-0.58	70.47	74.00	-3.53	PEAK
2	5460.00	54.60	-0.57	54.03	74.00	-19.97	PEAK
3	5464.33	58.37	-0.57	57.80	68.20	-10.40	PEAK
4	5470.00	51.08	-0.56	50.52	68.20	-17.68	PEAK
5	5494.50	104.26	-0.54	103.72	68.20	35.52	PEAK
6	5725.00	61.37	-0.34	61.03	68.20	-7.17	PEAK
7	5754.60	59.96	-0.06	59.90	68.20	-8.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

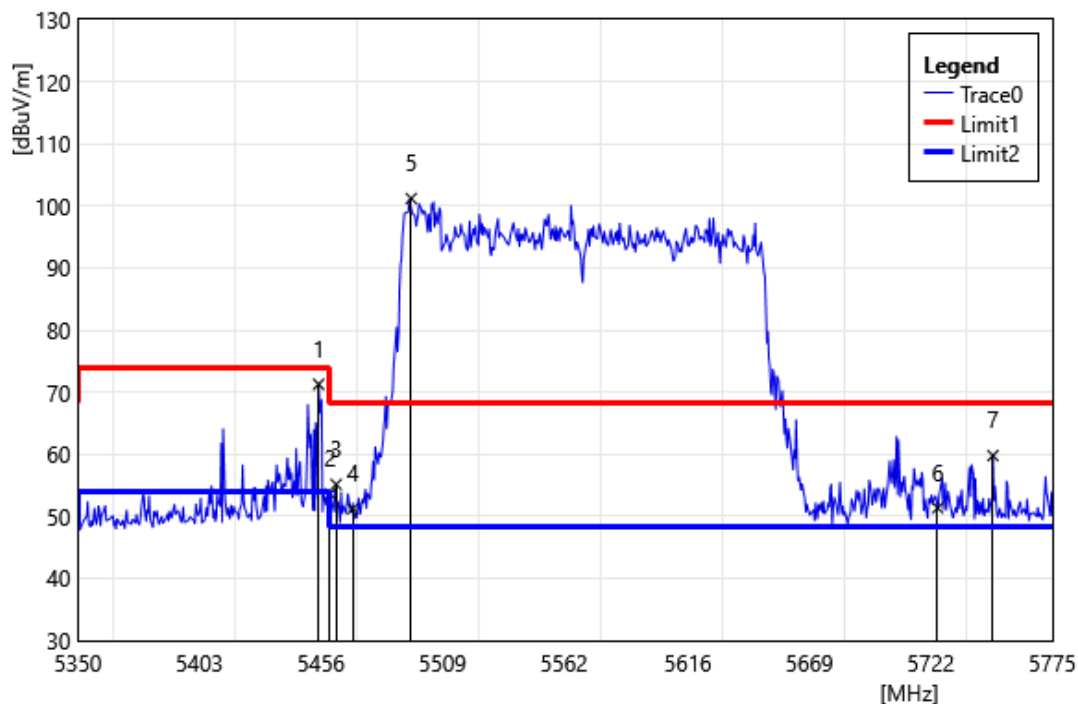


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.98	71.85	-0.58	71.27	74.00	-2.73	PEAK
2	5460.00	54.18	-0.57	53.61	74.00	-20.39	PEAK
3	5462.63	55.73	-0.57	55.16	68.20	-13.04	PEAK
4	5470.00	51.79	-0.56	51.23	68.20	-16.97	PEAK
5	5495.35	101.73	-0.54	101.19	68.20	32.99	PEAK
6	5725.00	51.70	-0.34	51.36	68.20	-16.84	PEAK
7	5749.08	59.88	-0.09	59.79	68.20	-8.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

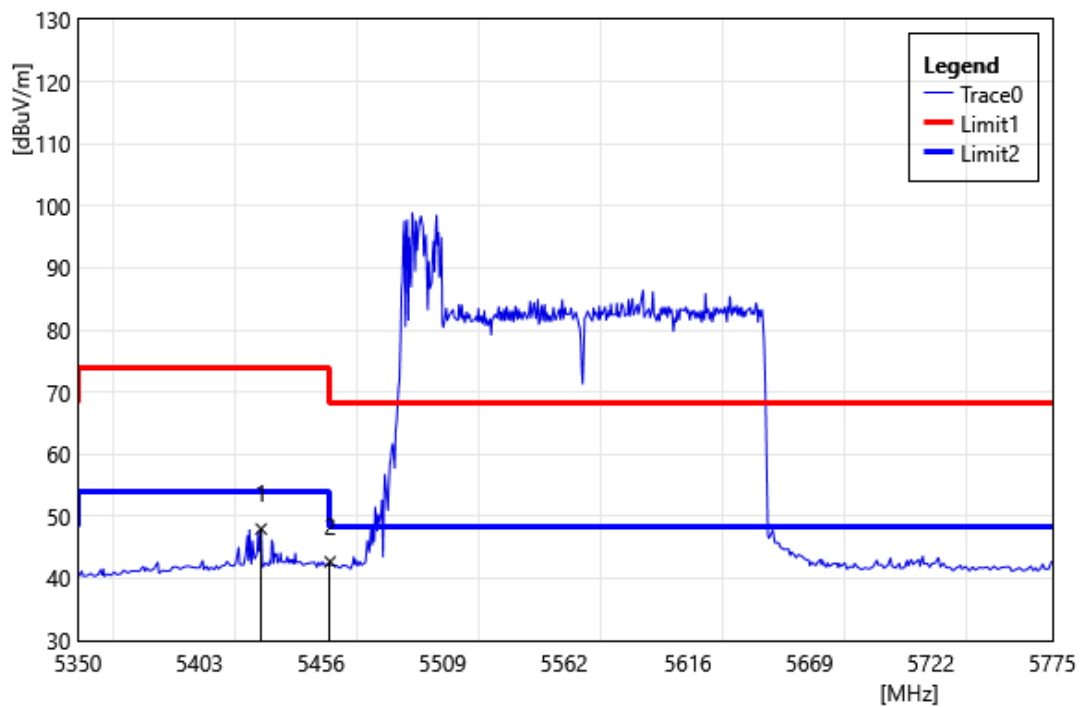

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5429.90	48.69	-0.73	47.96	54.00	-6.04	AVG
2	5460.00	43.25	-0.57	42.68	54.00	-11.32	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

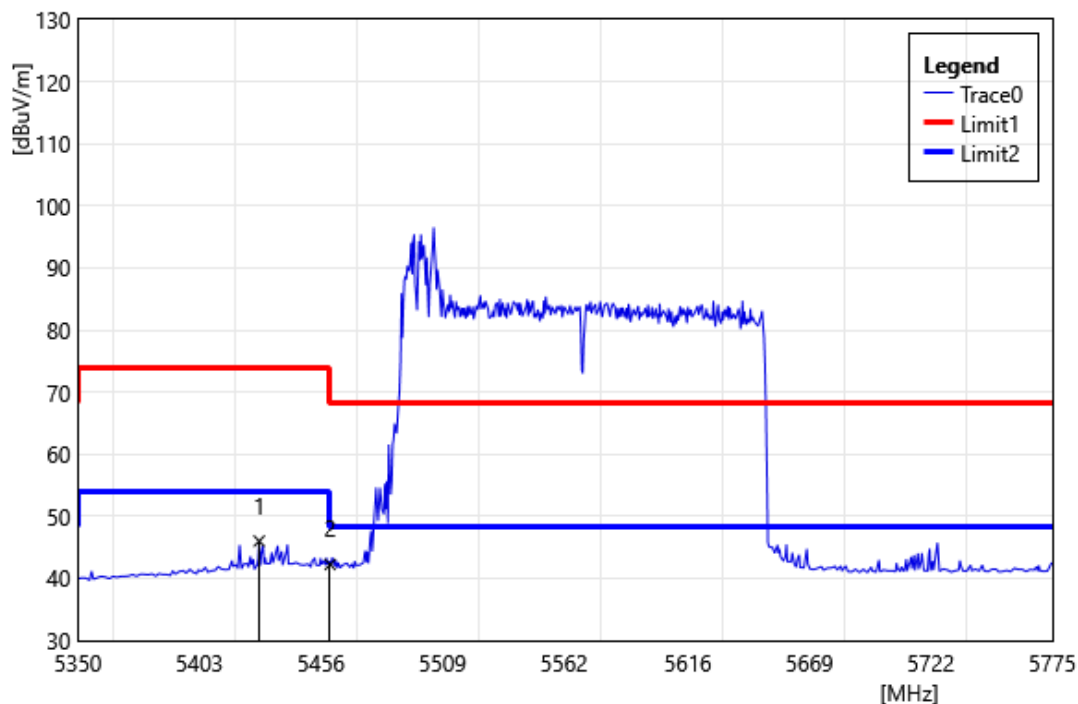

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5429.05	46.76	-0.73	46.03	54.00	-7.97	AVG
2	5460.00	42.82	-0.57	42.25	54.00	-11.75	AVG

5.3. Conducted Test Results

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power Measurement

Reference Appendix A

Maximum Conducted Output Power and Transmit power control Measurement

Reference Appendix A

26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

---END---