



Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025 MHz		
Polarization:	Horizontal		
Remark:			

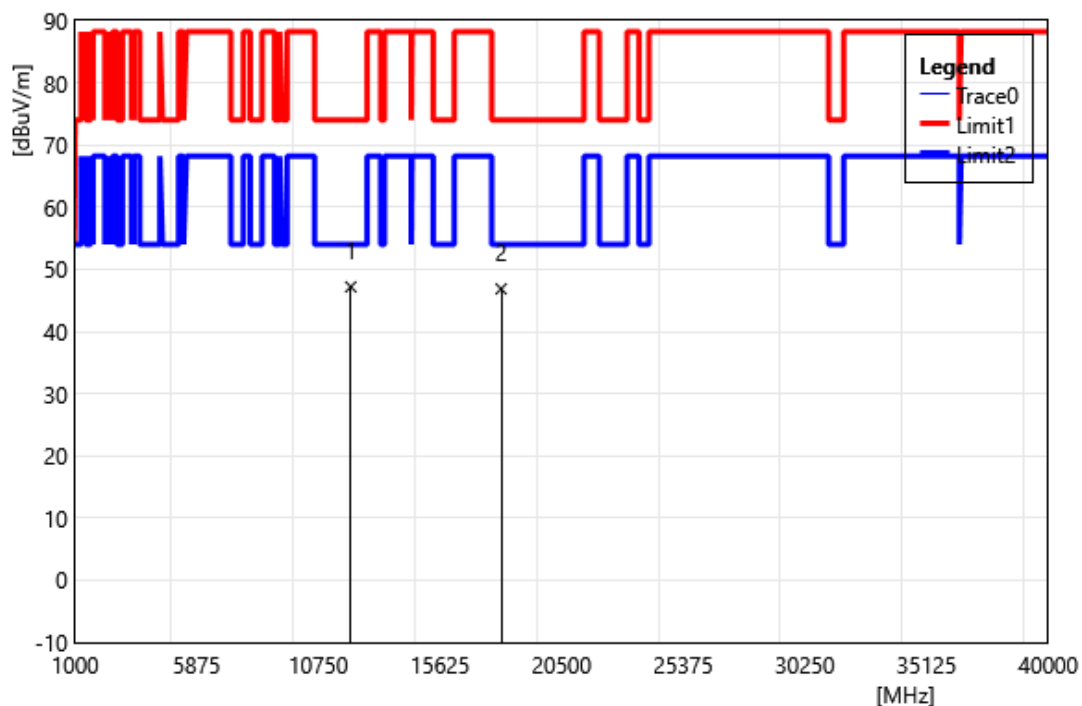


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.30	11.88	47.18	74.00	-26.82	PEAK
2	18075.00	32.59	14.27	46.86	74.00	-27.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Vertical		
Remark:			

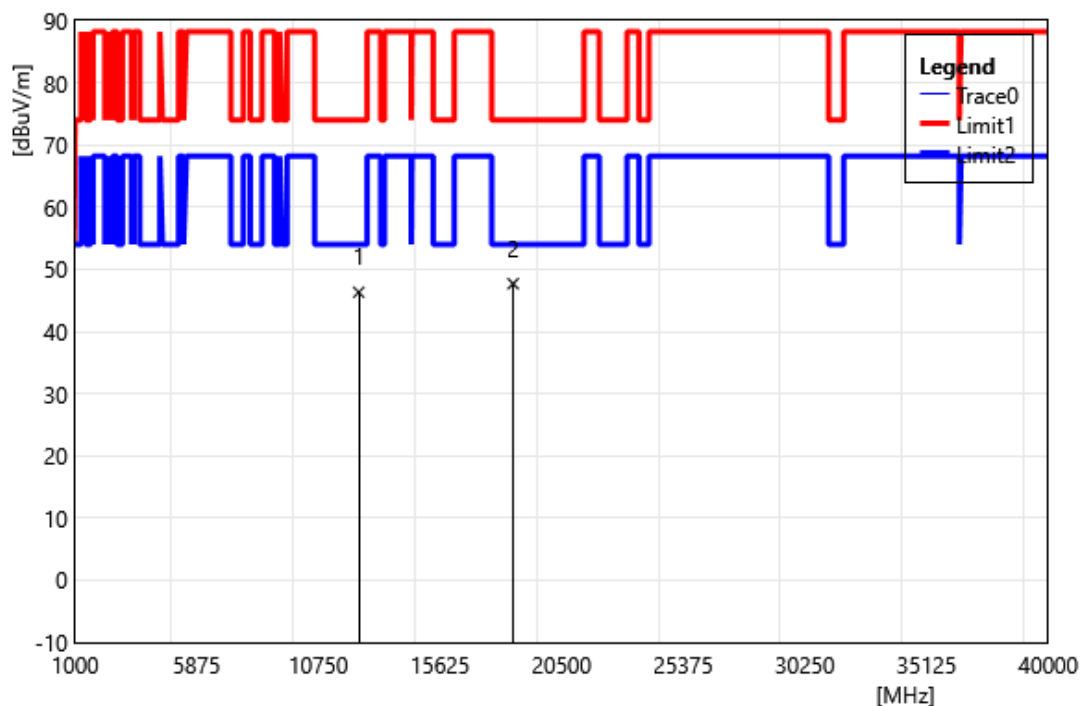


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	34.66	11.66	46.32	74.00	-27.68	PEAK
2	18555.00	32.72	14.97	47.69	74.00	-26.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Horizontal		
Remark:			

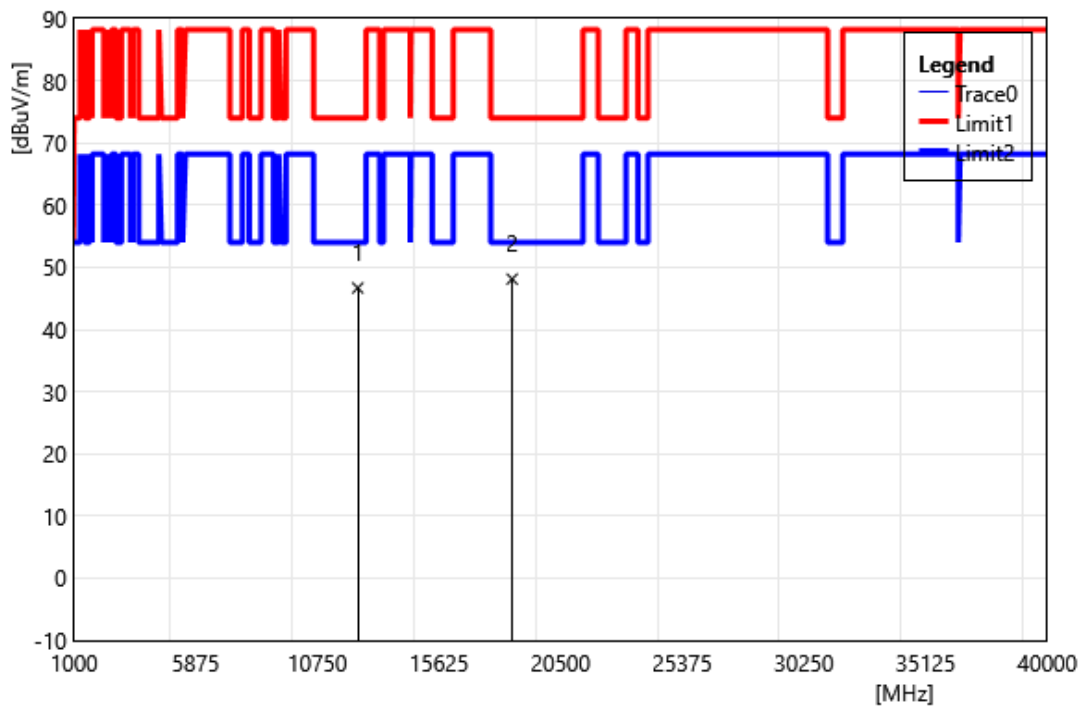


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	35.03	11.66	46.69	74.00	-27.31	PEAK
2	18555.00	33.15	14.97	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Vertical		
Remark:			

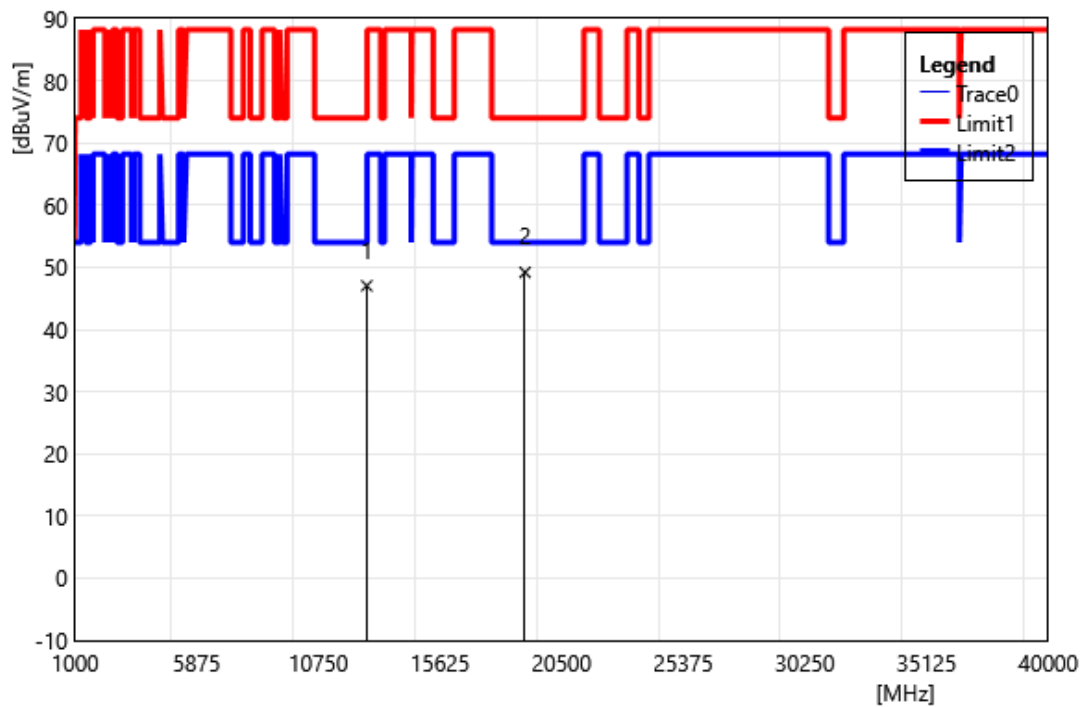


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.83	12.21	47.04	74.00	-26.96	PEAK
2	19035.00	33.56	15.64	49.20	74.00	-24.80	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Horizontal		
Remark:			

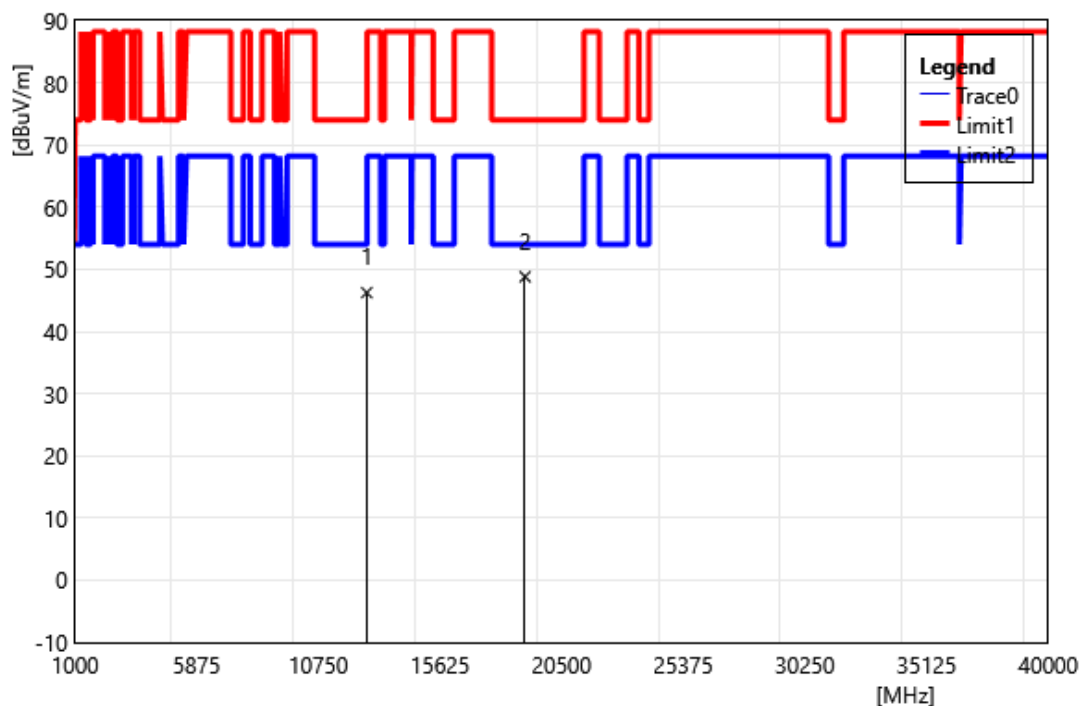


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.05	12.21	46.26	74.00	-27.74	PEAK
2	19035.00	33.17	15.64	48.81	74.00	-25.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Vertical		
Remark:			

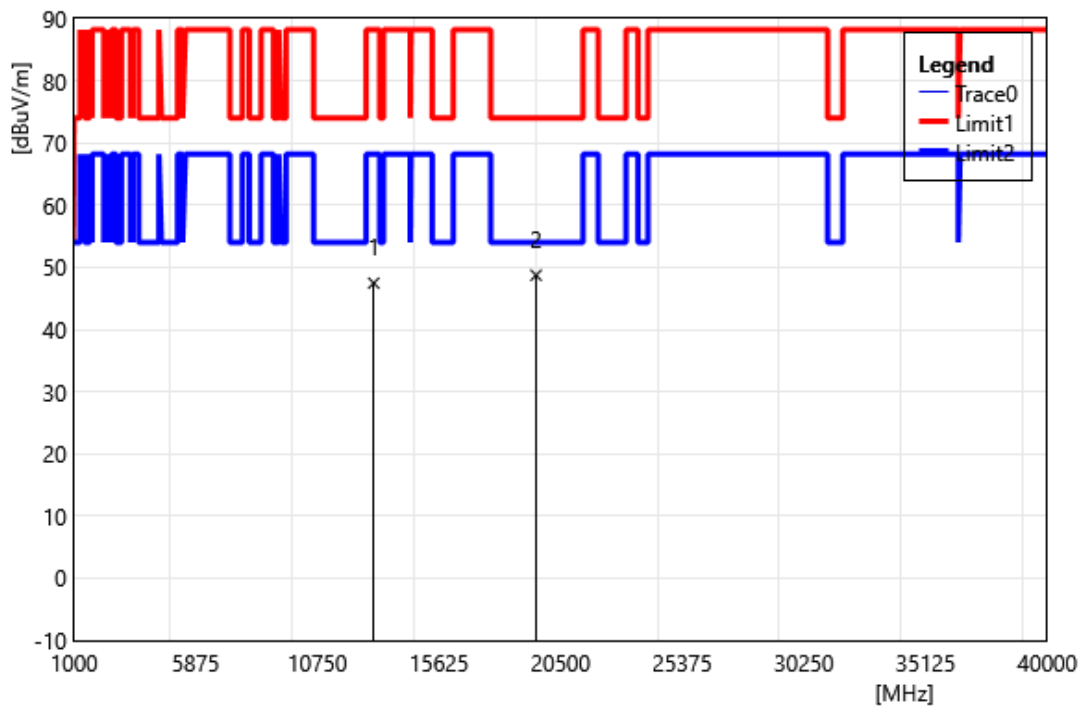


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	34.42	13.03	47.45	88.20	-40.75	PEAK
2	19515.00	32.94	15.80	48.74	74.00	-25.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Horizontal		
Remark:			

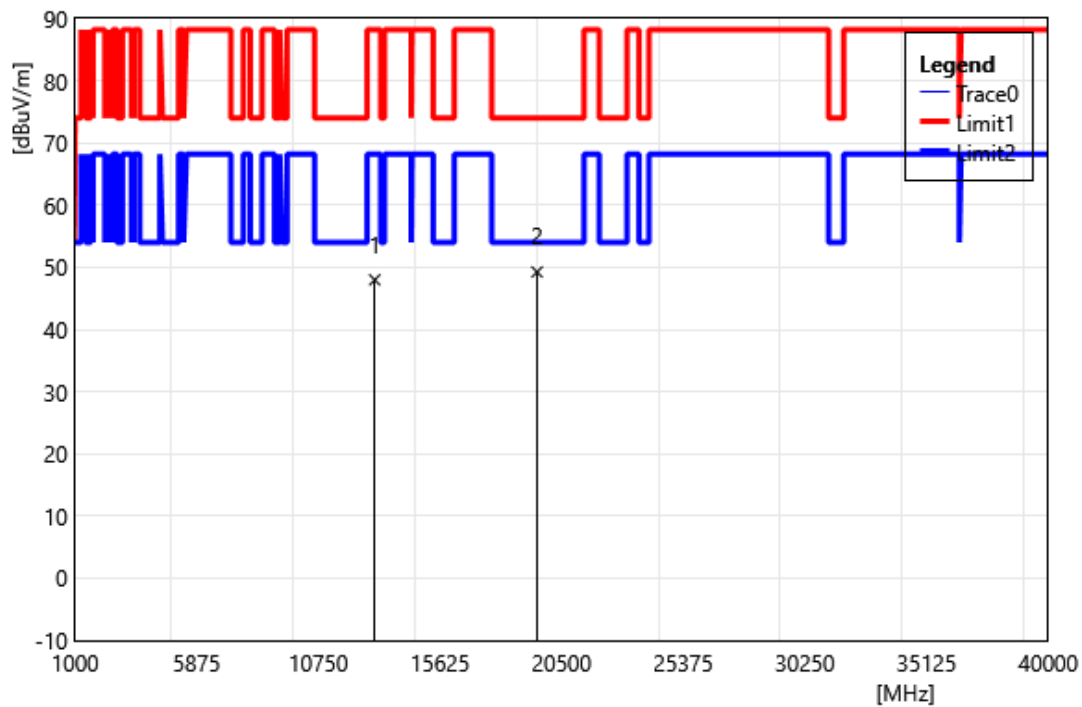


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	34.96	13.03	47.99	88.20	-40.21	PEAK
2	19515.00	33.46	15.80	49.26	74.00	-24.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Vertical		
Remark:			

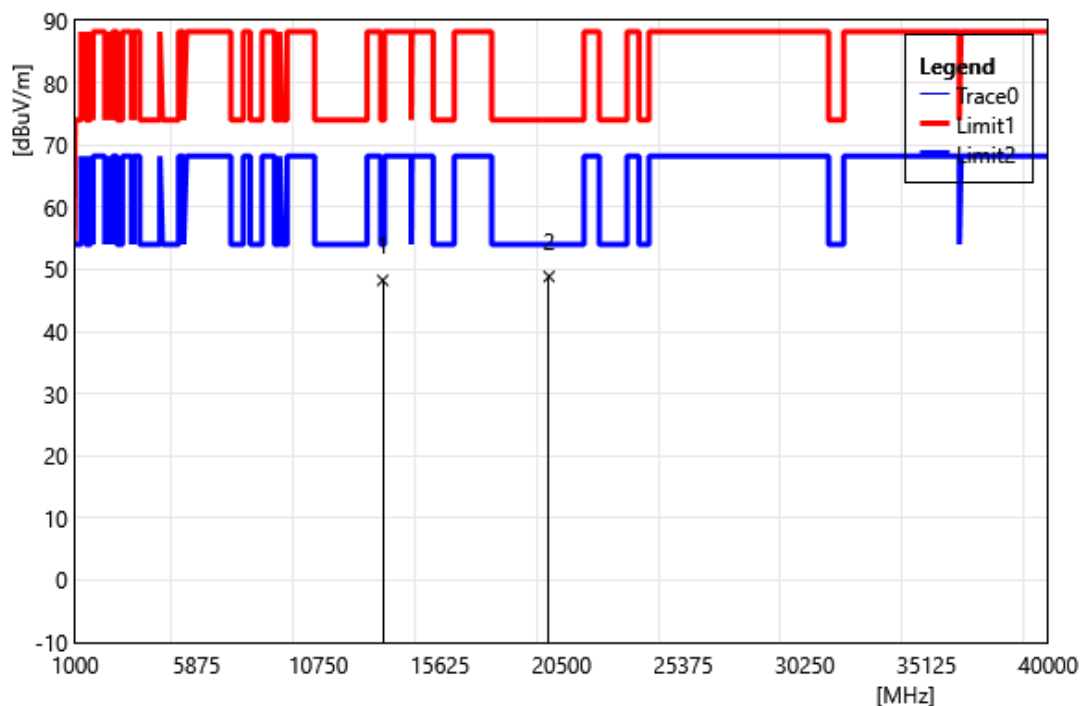


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	34.75	13.48	48.23	74.00	-25.77	PEAK
2	19995.00	32.32	16.53	48.85	74.00	-25.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Horizontal		
Remark:			

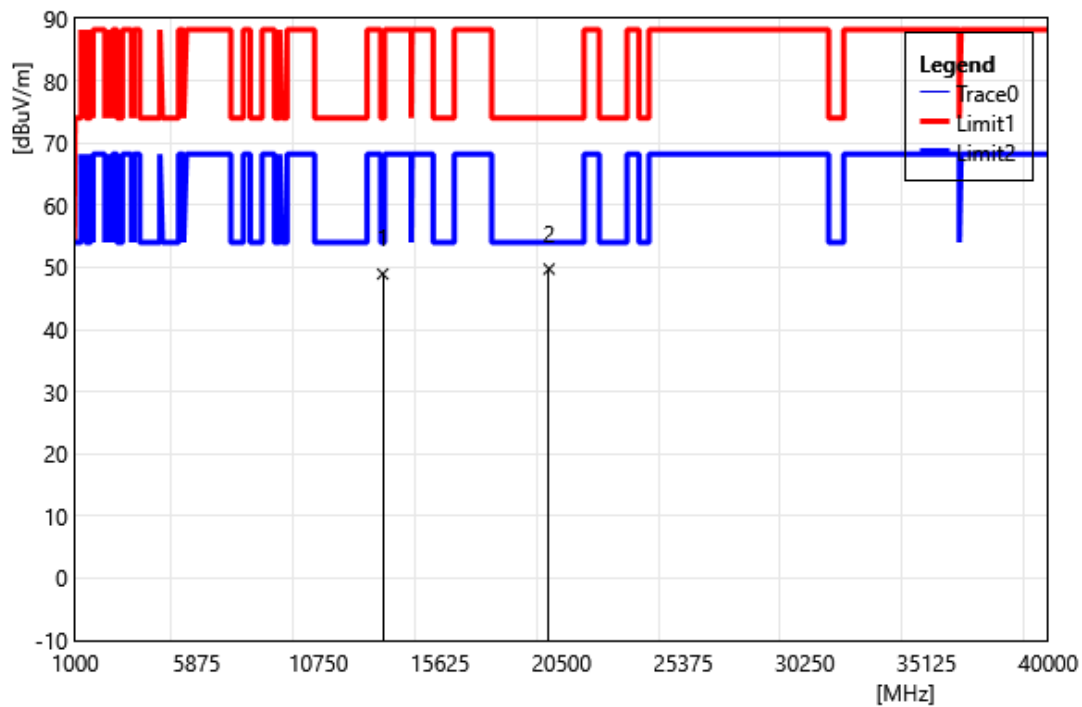


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	35.45	13.48	48.93	74.00	-25.07	PEAK
2	19995.00	33.20	16.53	49.73	74.00	-24.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825		
	MHz		
Polarization:	Vertical		
Remark:			

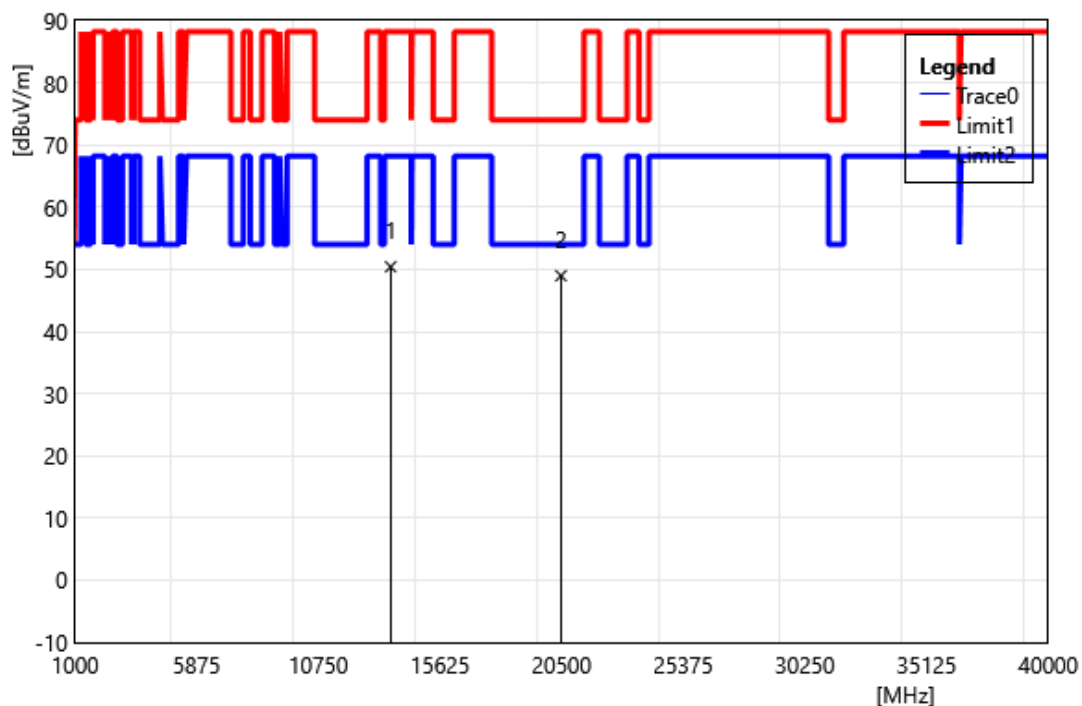


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	35.90	14.51	50.41	88.20	-37.79	PEAK
2	20475.00	32.22	16.76	48.98	74.00	-25.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825		
	MHz		
Polarization:	Horizontal		
Remark:			

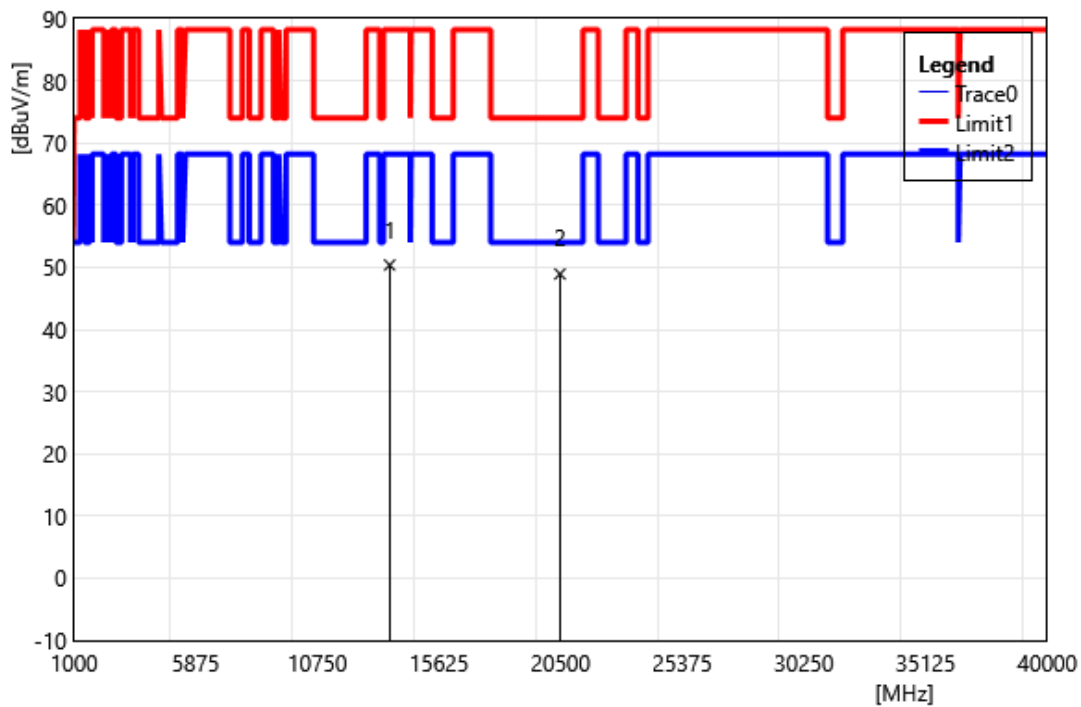


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	35.86	14.51	50.37	88.20	-37.83	PEAK
2	20475.00	32.17	16.76	48.93	74.00	-25.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

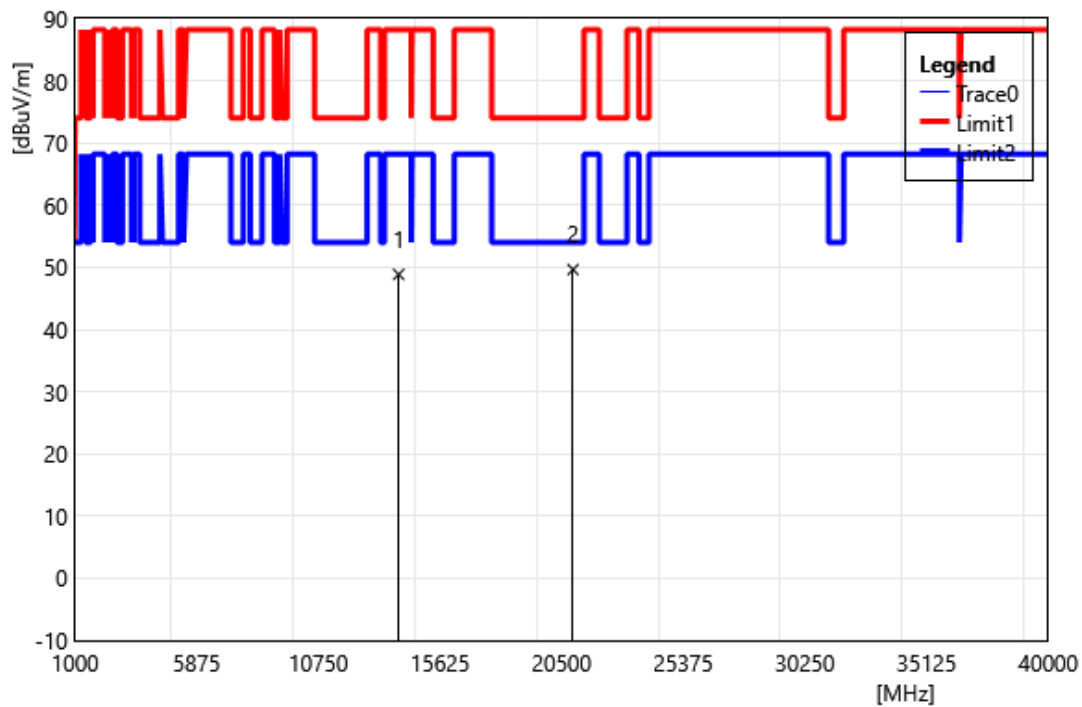


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	34.02	14.85	48.87	88.20	-39.33	PEAK
2	20955.00	32.57	17.08	49.65	74.00	-24.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

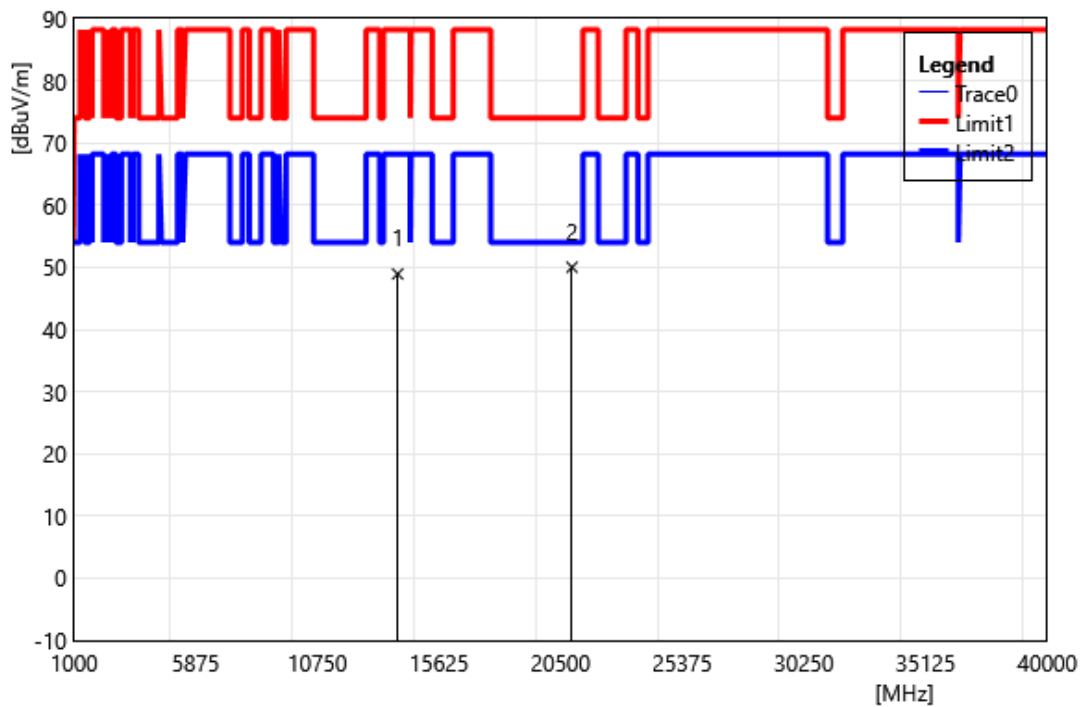


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	34.10	14.85	48.95	88.20	-39.25	PEAK
2	20955.00	32.94	17.08	50.02	74.00	-23.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

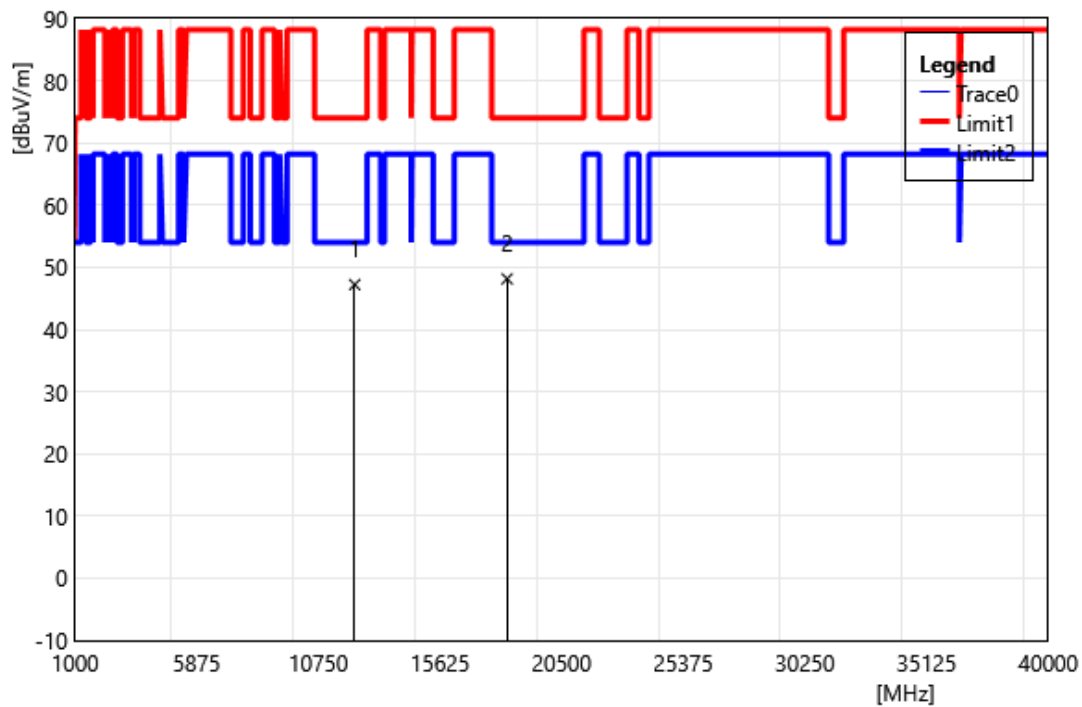


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	35.28	11.96	47.24	74.00	-26.76	PEAK
2	18315.00	33.21	14.93	48.14	74.00	-25.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

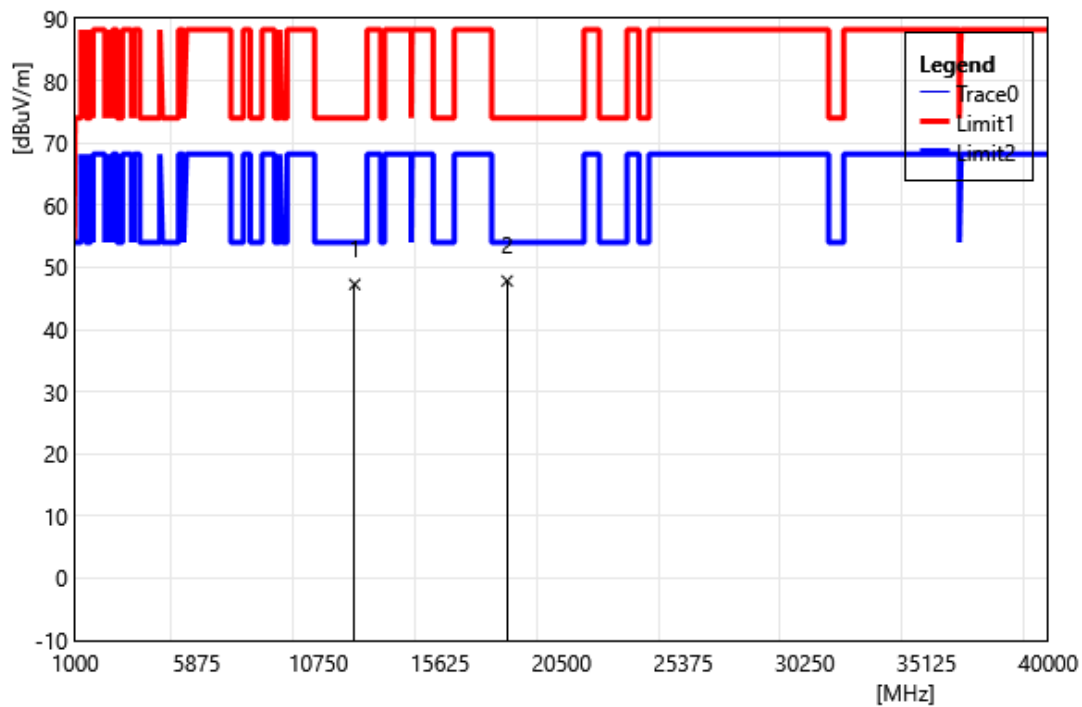


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	35.31	11.96	47.27	74.00	-26.73	PEAK
2	18315.00	32.88	14.93	47.81	74.00	-26.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Vertical		
Remark:			

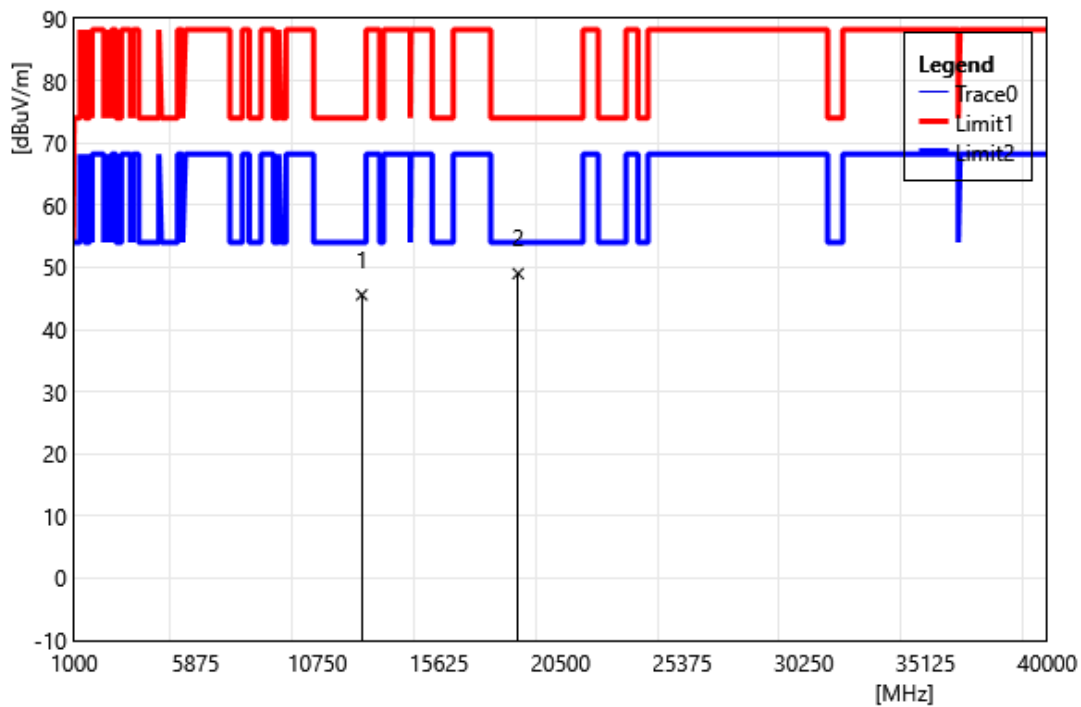


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	33.93	11.64	45.57	74.00	-28.43	PEAK
2	18795.00	33.50	15.49	48.99	74.00	-25.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Horizontal		
Remark:			

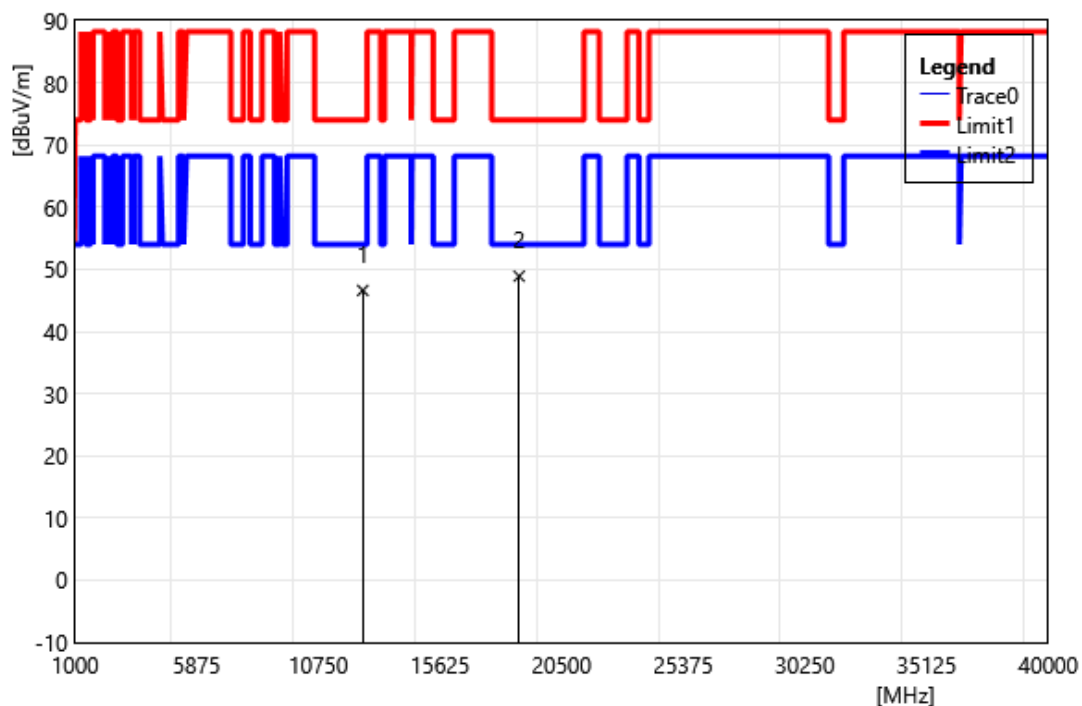


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	34.97	11.64	46.61	74.00	-27.39	PEAK
2	18795.00	33.41	15.49	48.90	74.00	-25.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Vertical		
Remark:			

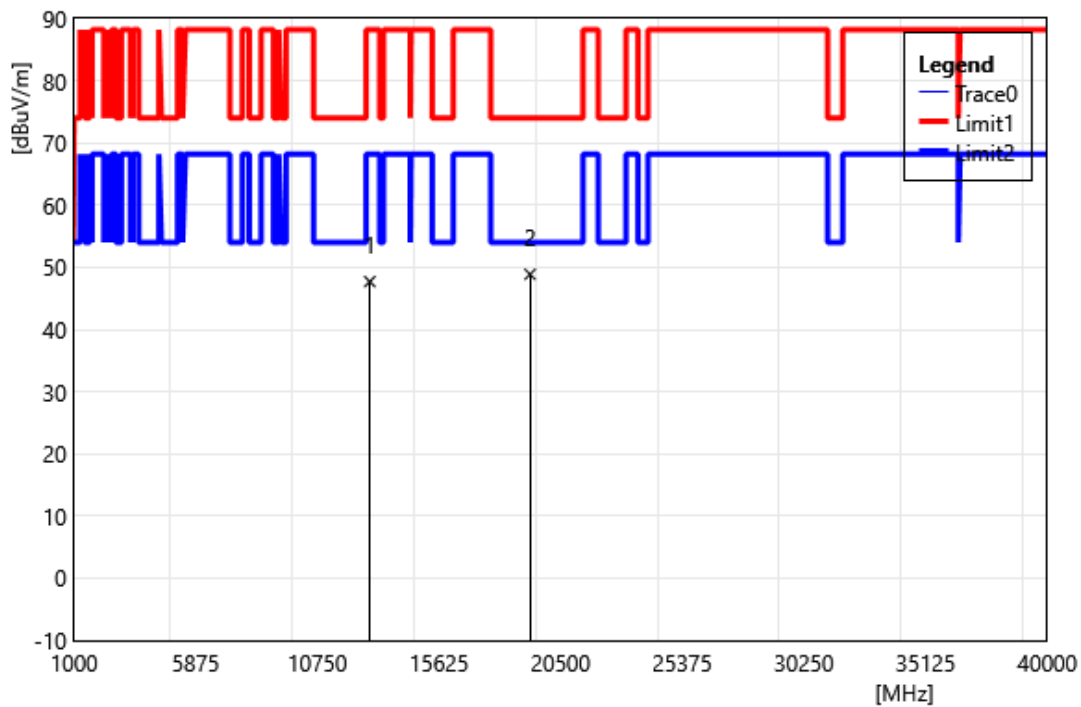


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	34.92	12.79	47.71	88.20	-40.49	PEAK
2	19275.00	32.79	16.10	48.89	74.00	-25.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Horizontal		
Remark:			

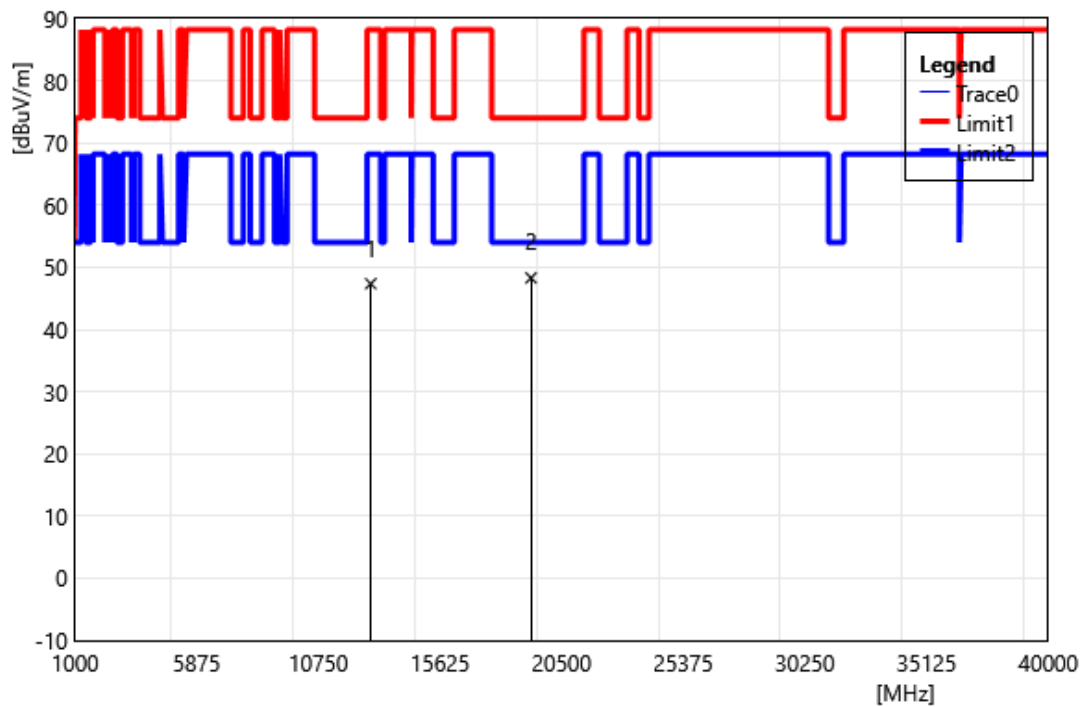


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	34.57	12.79	47.36	88.20	-40.84	PEAK
2	19275.00	32.20	16.10	48.30	74.00	-25.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585		
	MHz		
Polarization:	Vertical		
Remark:			

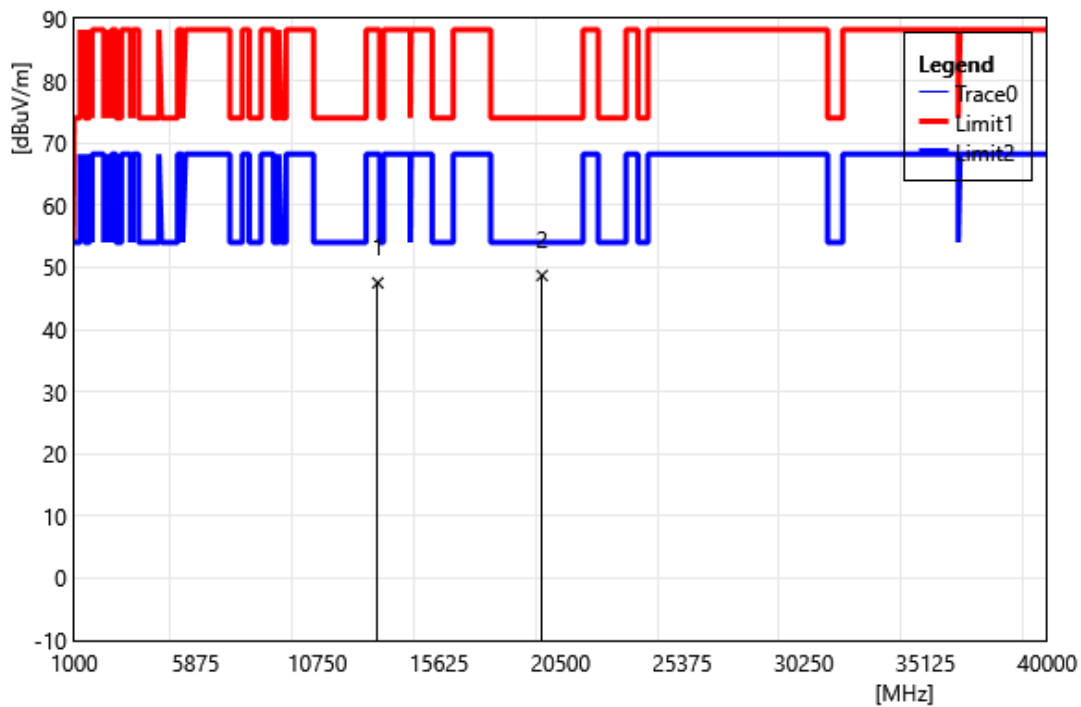


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	34.42	13.08	47.50	88.20	-40.70	PEAK
2	19755.00	32.53	16.16	48.69	74.00	-25.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585		
	MHz		
Polarization:	Horizontal		
Remark:			

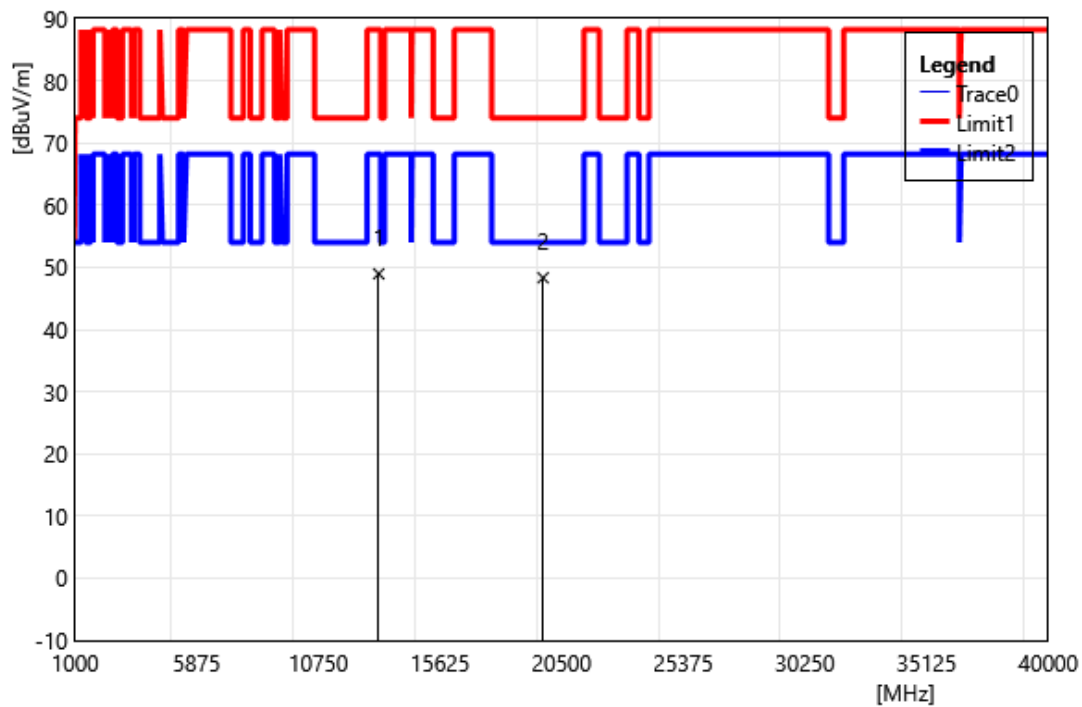


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	35.88	13.08	48.96	88.20	-39.24	PEAK
2	19755.00	32.17	16.16	48.33	74.00	-25.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745		
	MHz		
Polarization:	Vertical		
Remark:			

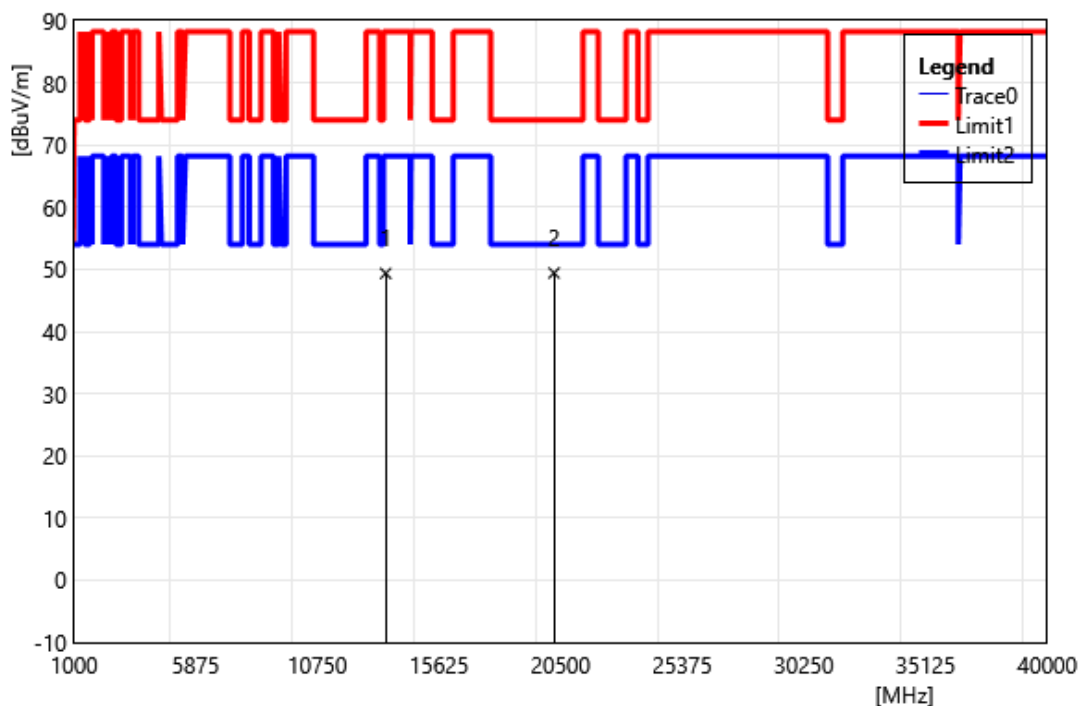


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	35.08	14.28	49.36	88.20	-38.84	PEAK
2	20235.00	32.99	16.43	49.42	74.00	-24.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745		
	MHz		
Polarization:	Horizontal		
Remark:			

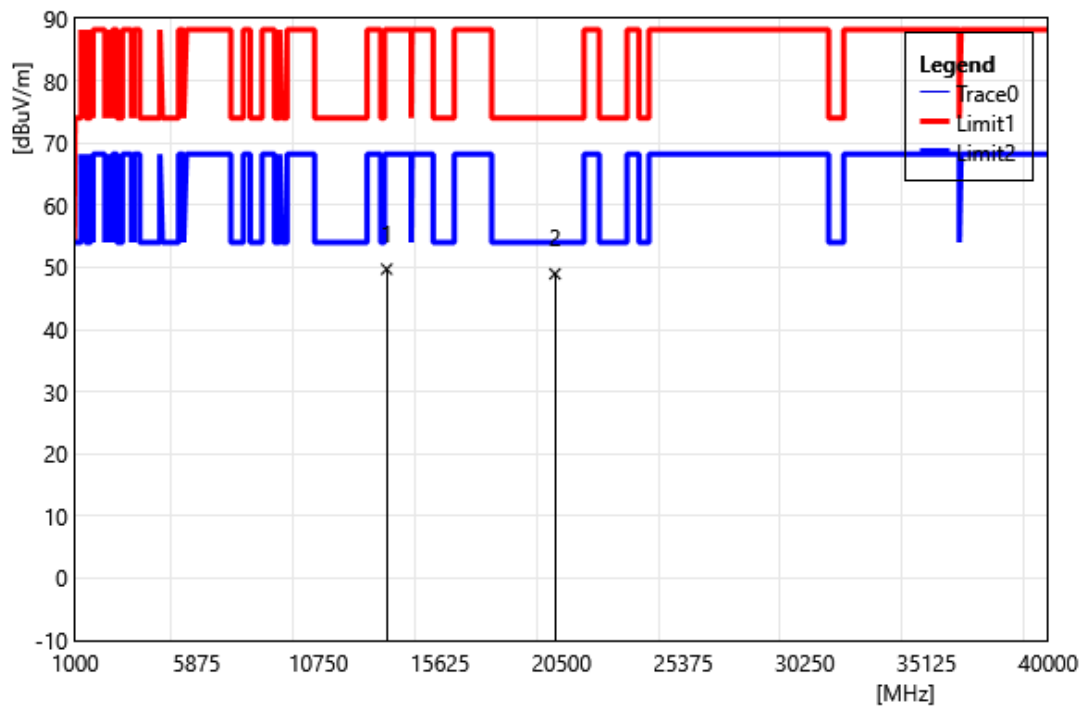


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	35.42	14.28	49.70	88.20	-38.50	PEAK
2	20235.00	32.52	16.43	48.95	74.00	-25.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

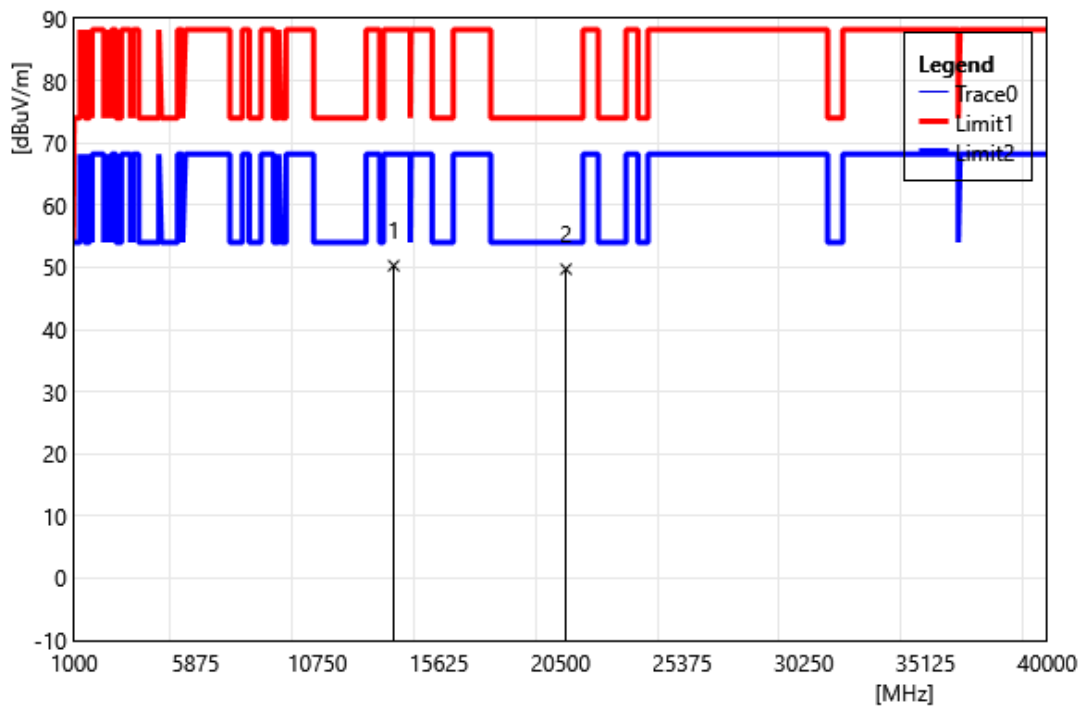

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	35.93	14.34	50.27	88.20	-37.93	PEAK
2	20715.00	32.93	16.78	49.71	74.00	-24.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Horizontal		
Remark:			

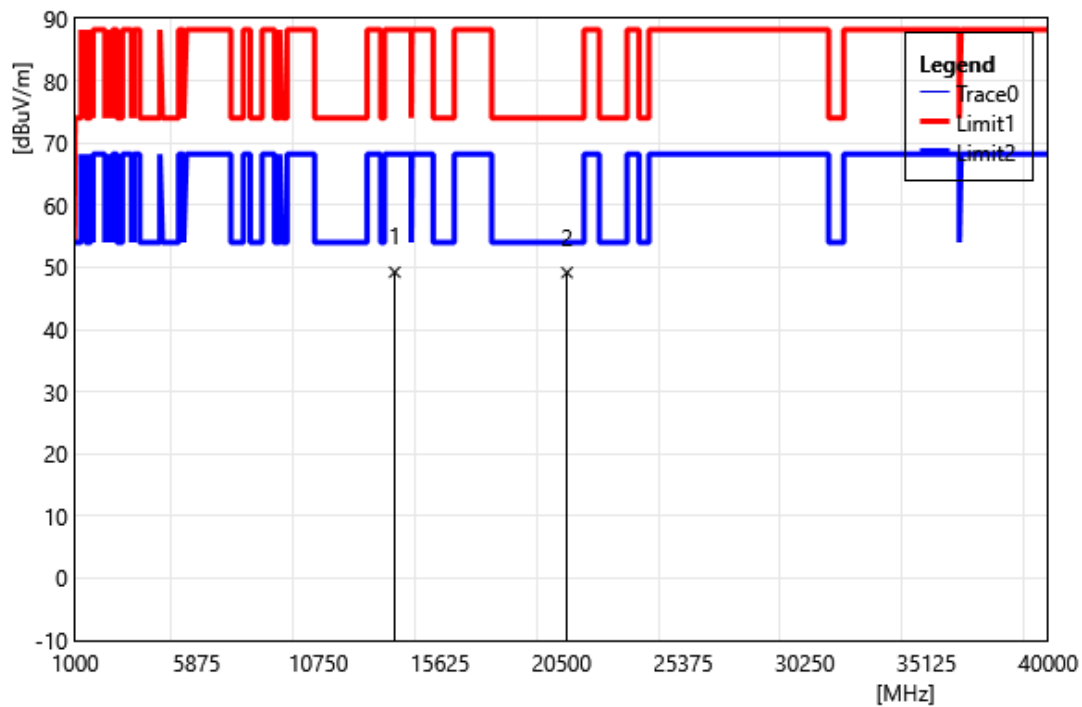


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	34.88	14.34	49.22	88.20	-38.98	PEAK
2	20715.00	32.39	16.78	49.17	74.00	-24.83	PEAK

2X2


Below 1 GHz

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

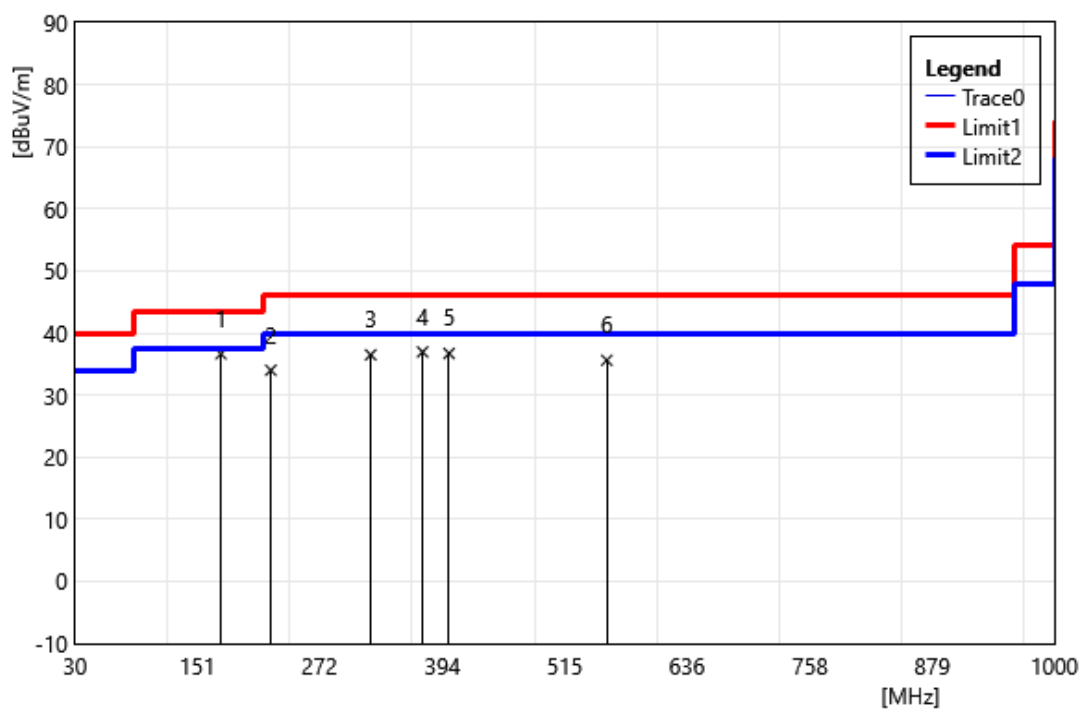

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	174.53	44.08	-7.43	36.65	43.50	-6.85	QP
2	224.00	42.40	-8.39	34.01	46.00	-11.99	QP
3	322.94	41.86	-5.36	36.50	46.00	-9.50	QP
4	374.35	41.11	-4.15	36.96	46.00	-9.04	QP
5	400.54	40.47	-3.75	36.72	46.00	-9.28	QP
6	556.71	36.37	-0.75	35.62	46.00	-10.38	QP

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

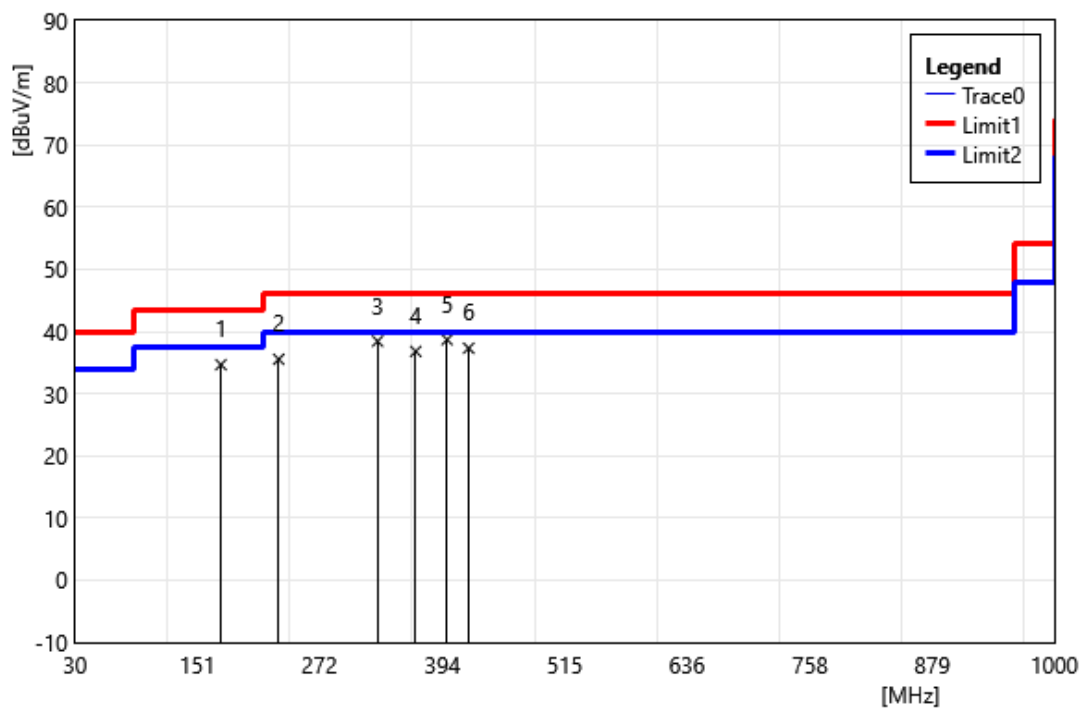


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	174.53	42.09	-7.43	34.66	43.50	-8.84	QP
2	231.76	43.29	-7.75	35.54	46.00	-10.46	QP
3	329.73	43.62	-5.18	38.45	46.00	-7.56	QP
4	367.56	41.12	-4.32	36.80	46.00	-9.20	QP
5	398.60	42.22	-3.52	38.70	46.00	-7.30	QP
6	419.94	40.60	-3.28	37.32	46.00	-8.68	QP

Harmonic


Above 1 GHz

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

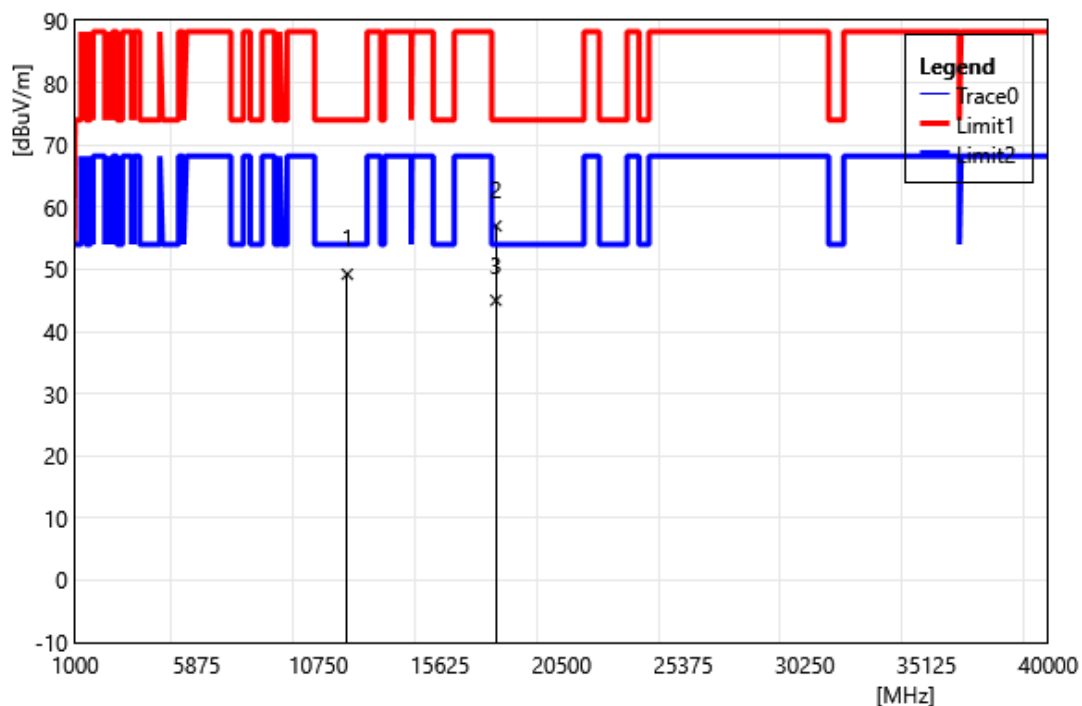


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	37.56	11.66	49.22	74.00	-24.78	PEAK
2	17865.00	32.84	24.14	56.98	74.00	-17.02	PEAK
3	17865.00	20.88	24.14	45.02	54.00	-8.98	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

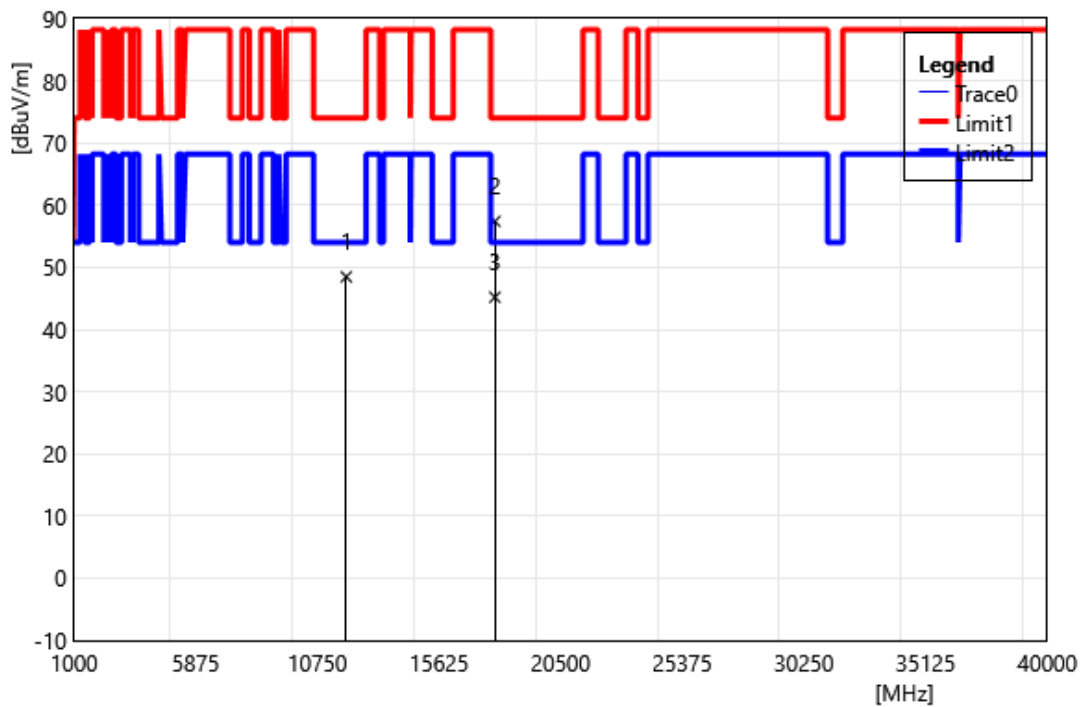


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	36.82	11.66	48.48	74.00	-25.52	PEAK
2	17865.00	33.27	24.14	57.41	74.00	-16.59	PEAK
3	17865.00	21.07	24.14	45.21	54.00	-8.79	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6175		
	MHz		
Polarization:	Vertical		
Remark:			

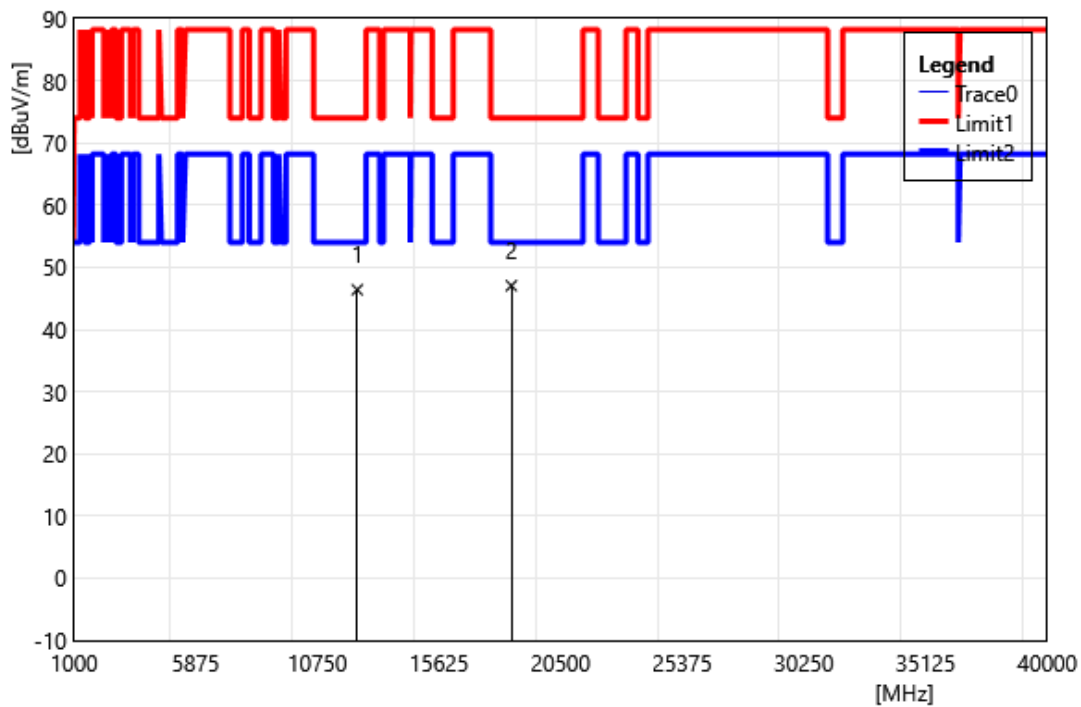


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	34.69	11.71	46.40	74.00	-27.60	PEAK
2	18525.00	32.13	14.91	47.04	74.00	-26.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6175		
	MHz		
Polarization:	Horizontal		
Remark:			

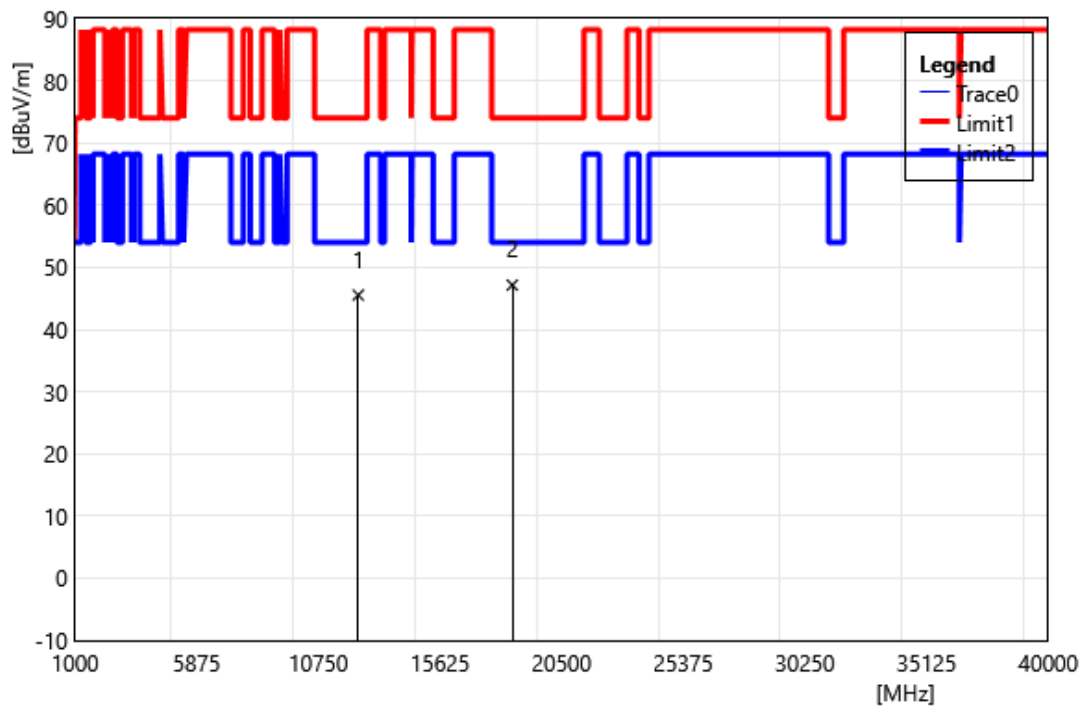


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	33.83	11.71	45.54	74.00	-28.46	PEAK
2	18525.00	32.24	14.91	47.15	74.00	-26.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6415		
	MHz		
Polarization:	Vertical		
Remark:			

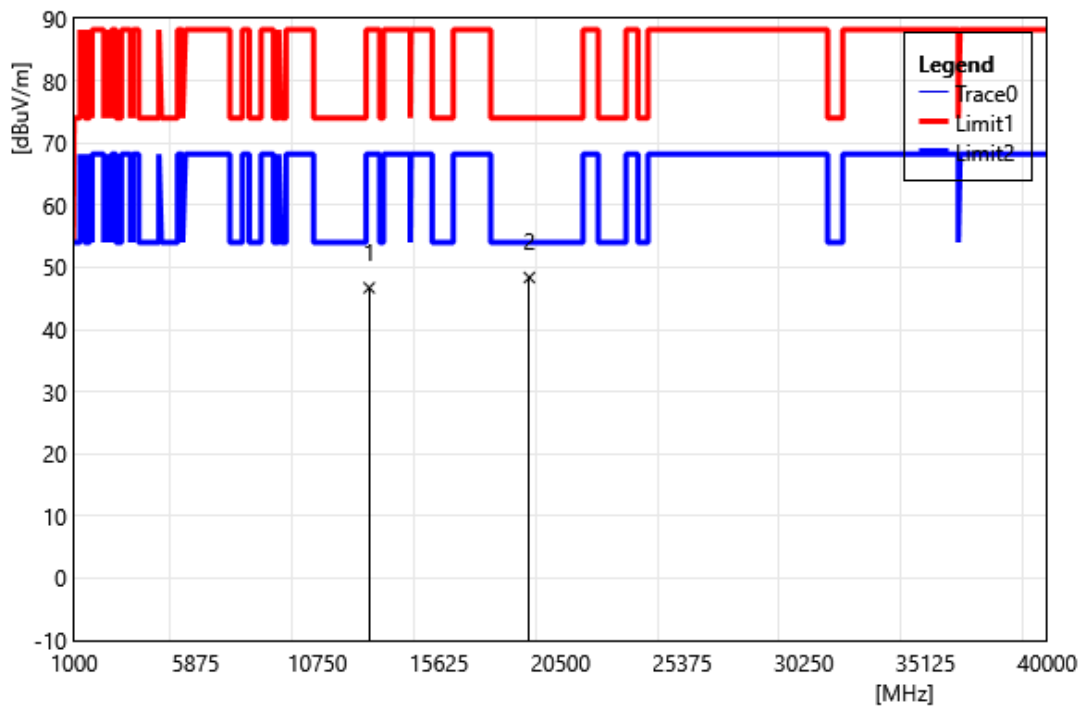


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	33.94	12.77	46.71	88.20	-41.49	PEAK
2	19245.00	32.33	16.04	48.37	74.00	-25.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6415		
	MHz		
Polarization:	Horizontal		
Remark:			

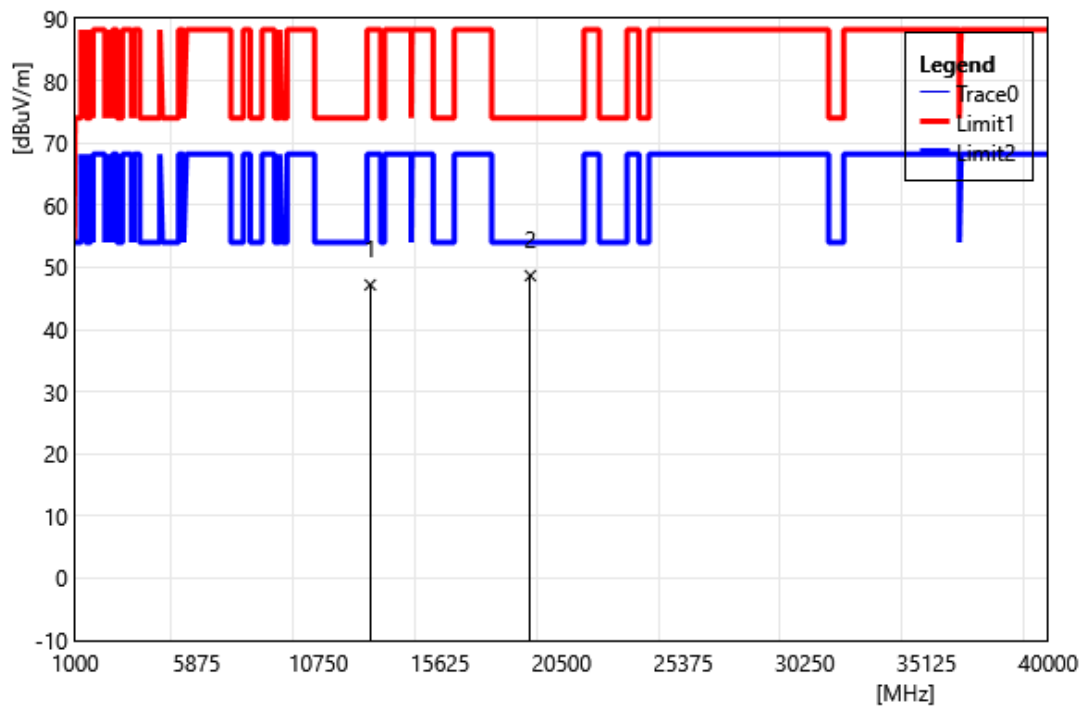


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	34.41	12.77	47.18	88.20	-41.02	PEAK
2	19245.00	32.63	16.04	48.67	74.00	-25.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6435		
	MHz		
Polarization:	Vertical		
Remark:			

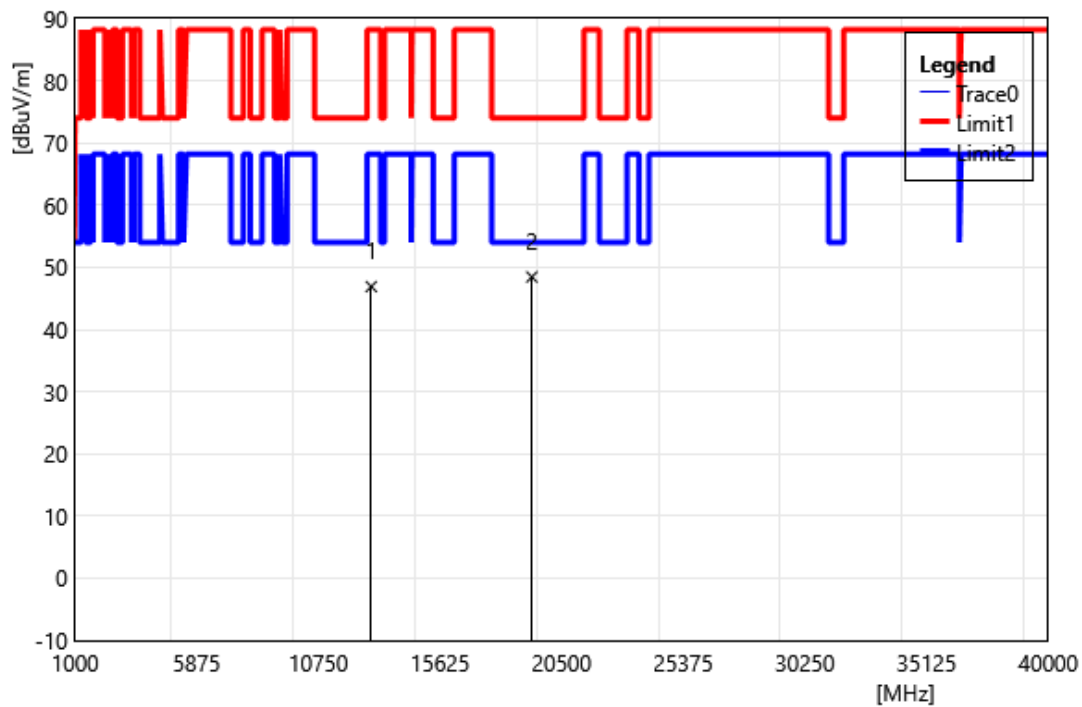


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	34.09	12.81	46.90	88.20	-41.30	PEAK
2	19305.00	32.31	16.15	48.46	74.00	-25.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6435		
	MHz		
Polarization:	Horizontal		
Remark:			

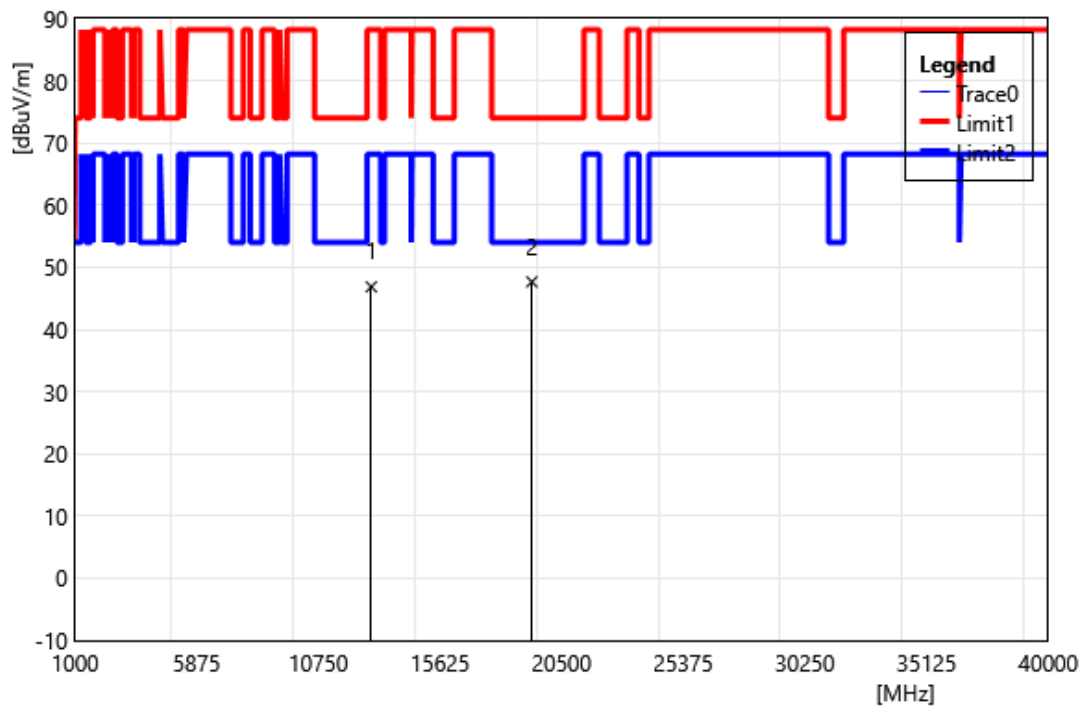


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	34.06	12.81	46.87	88.20	-41.33	PEAK
2	19305.00	31.51	16.15	47.66	74.00	-26.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6475		
	MHz		
Polarization:	Vertical		
Remark:			

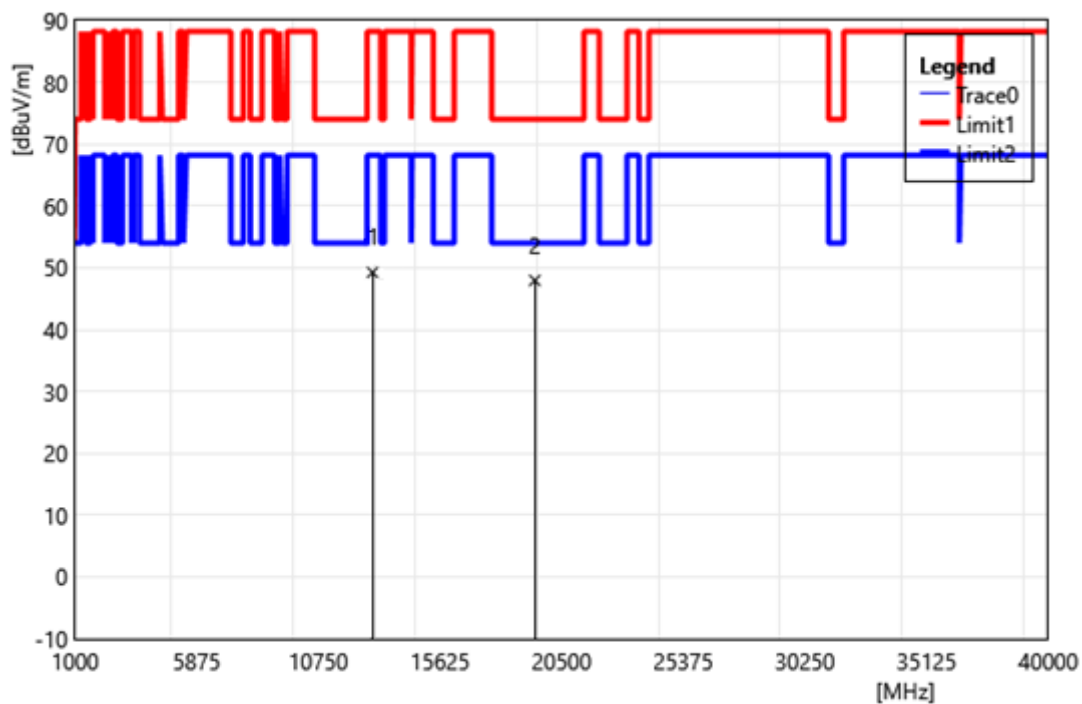


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	36.34	12.94	49.28	88.20	-38.92	PEAK
2	19425.00	31.57	16.38	47.95	74.00	-26.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6475		
	MHz		
Polarization:	Horizontal		
Remark:			

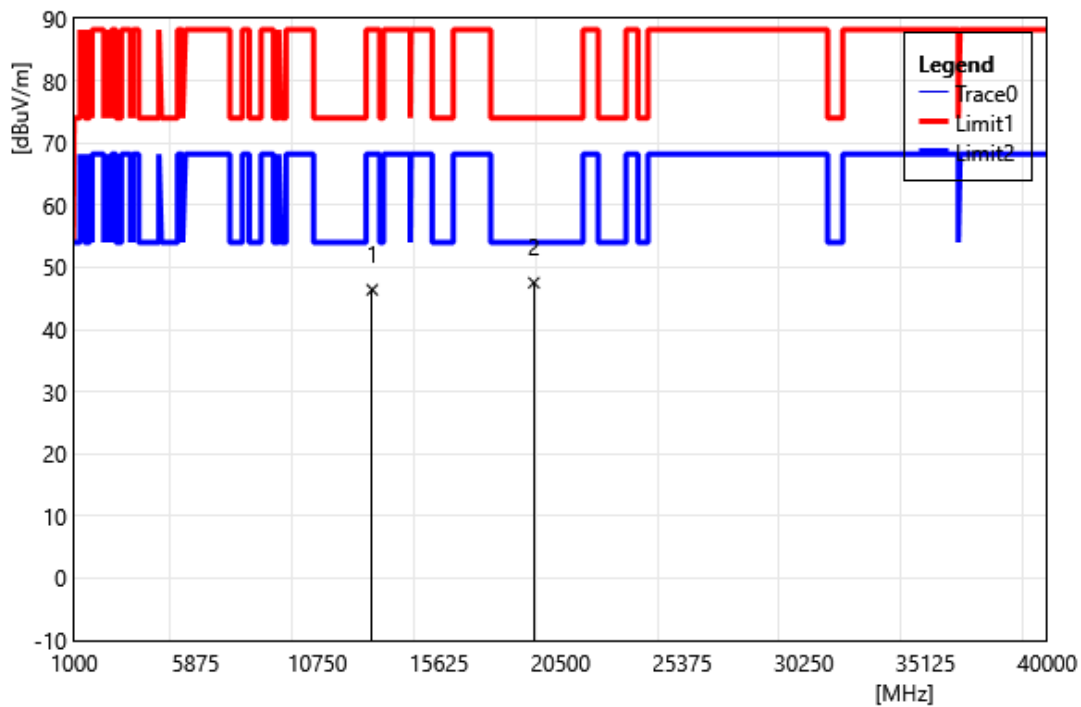


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	33.45	12.94	46.39	88.20	-41.81	PEAK
2	19425.00	31.14	16.38	47.52	74.00	-26.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6515		
	MHz		
Polarization:	Vertical		
Remark:			

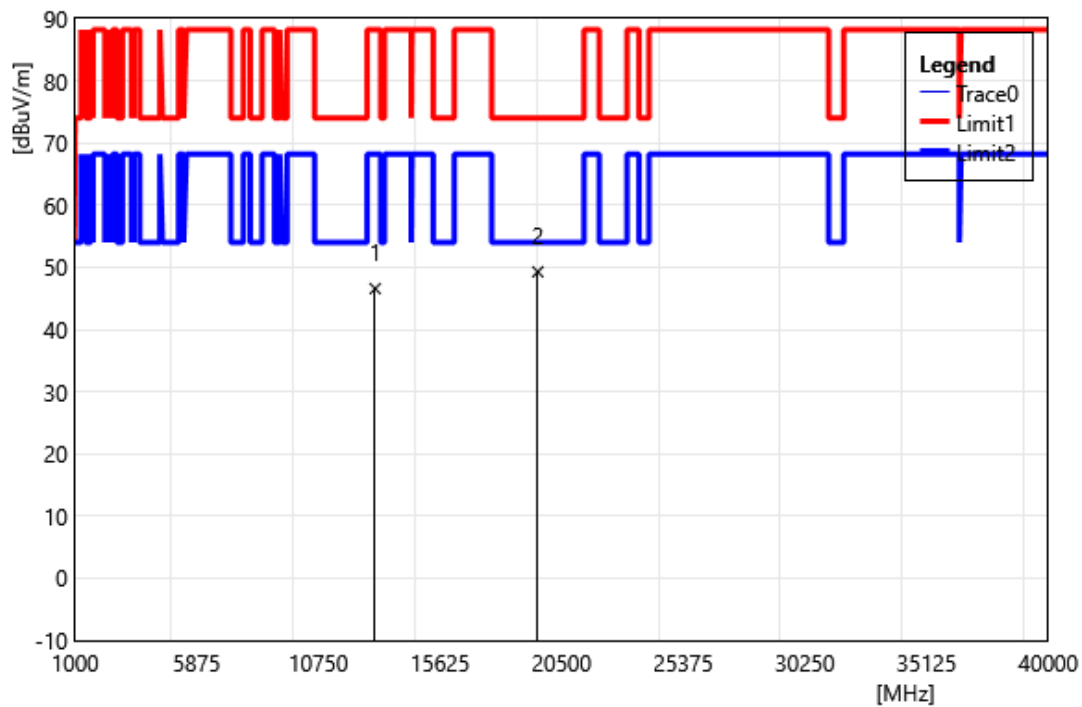


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	33.58	13.01	46.59	88.20	-41.61	PEAK
2	19545.00	33.44	15.84	49.28	74.00	-24.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6515		
	MHz		
Polarization:	Horizontal		
Remark:			

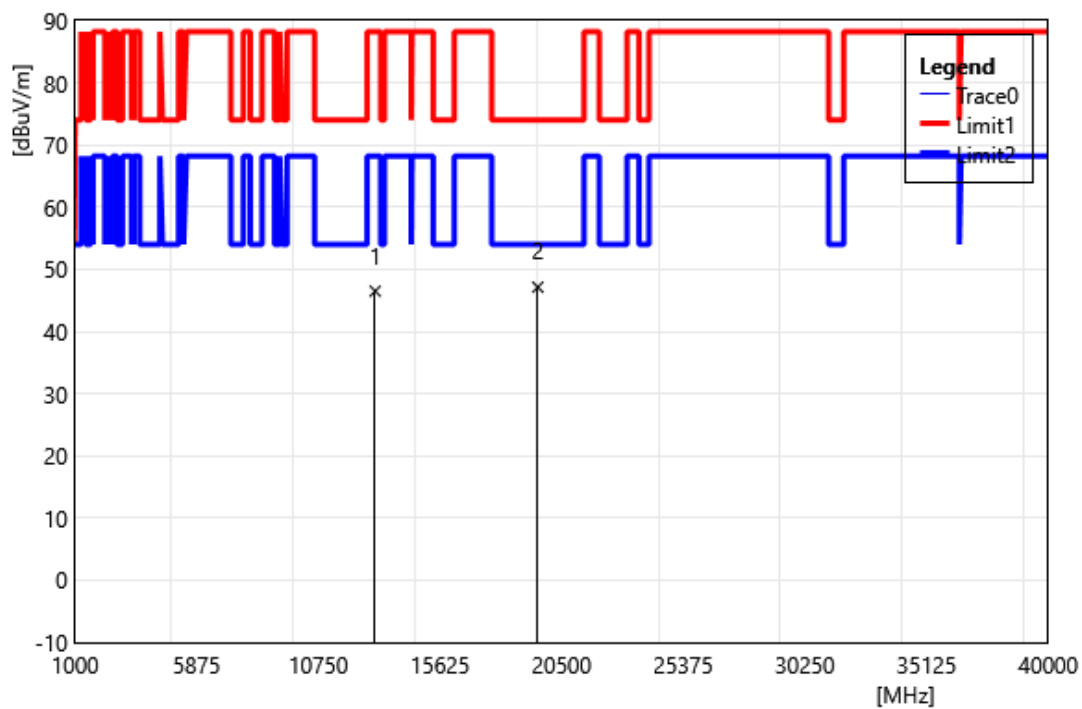


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	33.48	13.01	46.49	88.20	-41.71	PEAK
2	19545.00	31.29	15.84	47.13	74.00	-26.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6535		
	MHz		
Polarization:	Vertical		
Remark:			

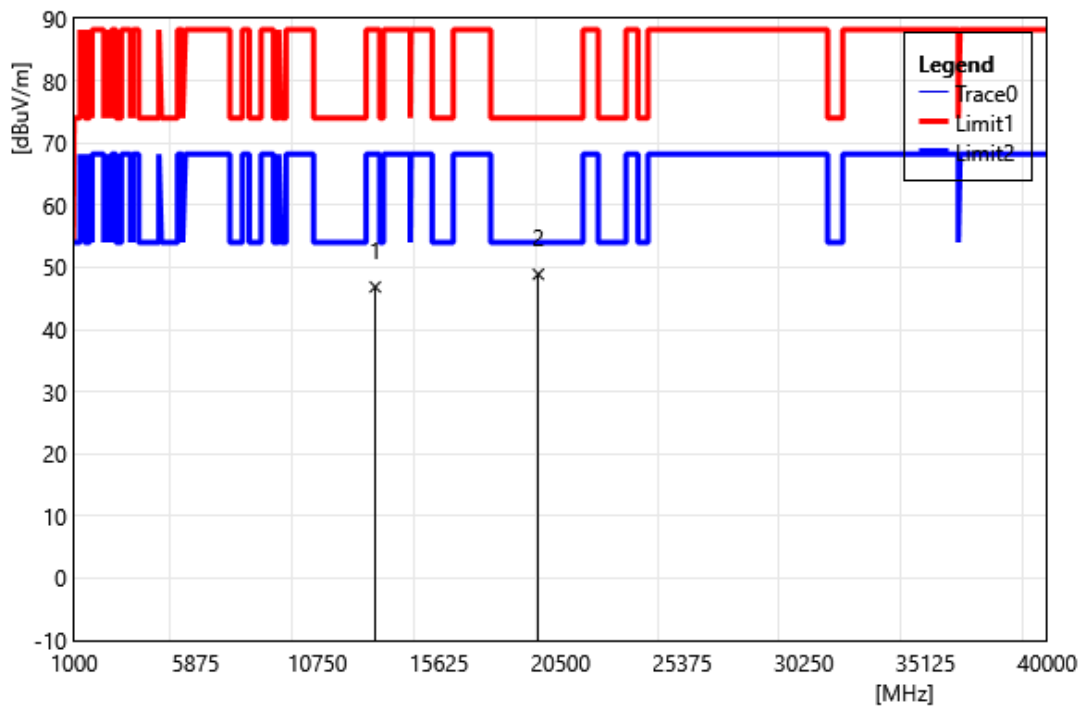


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	33.87	12.97	46.84	88.20	-41.36	PEAK
2	19605.00	32.96	15.93	48.89	74.00	-25.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6535		
	MHz		
Polarization:	Horizontal		
Remark:			

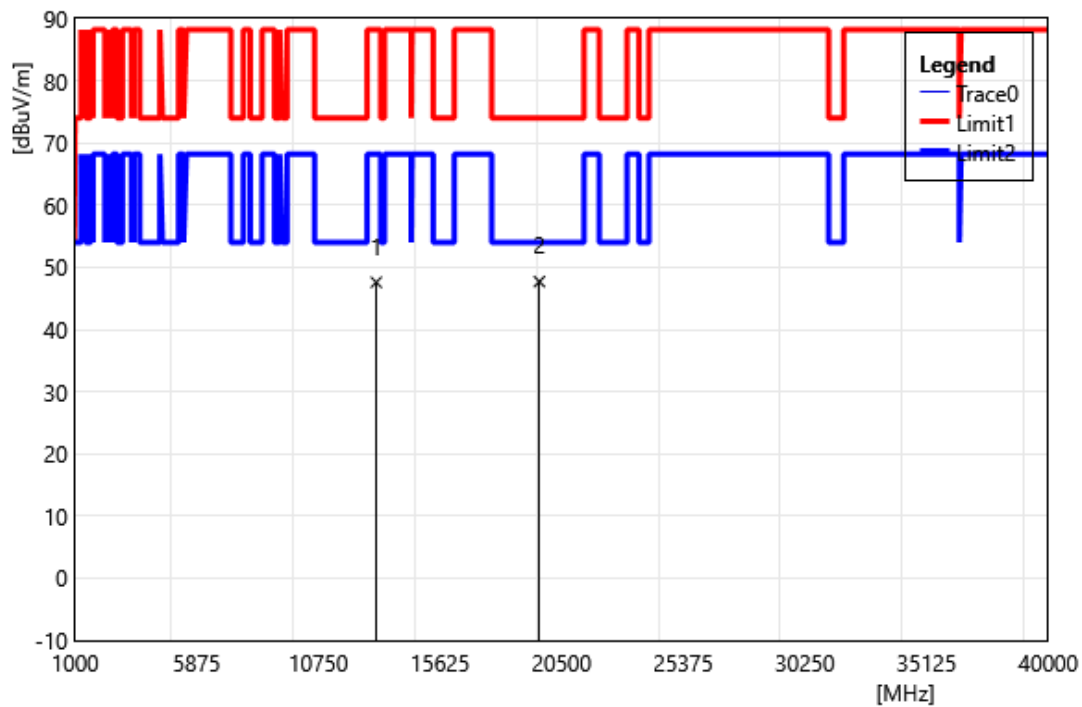


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	34.62	12.97	47.59	88.20	-40.61	PEAK
2	19605.00	31.78	15.93	47.71	74.00	-26.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6695		
	MHz		
Polarization:	Vertical		
Remark:			

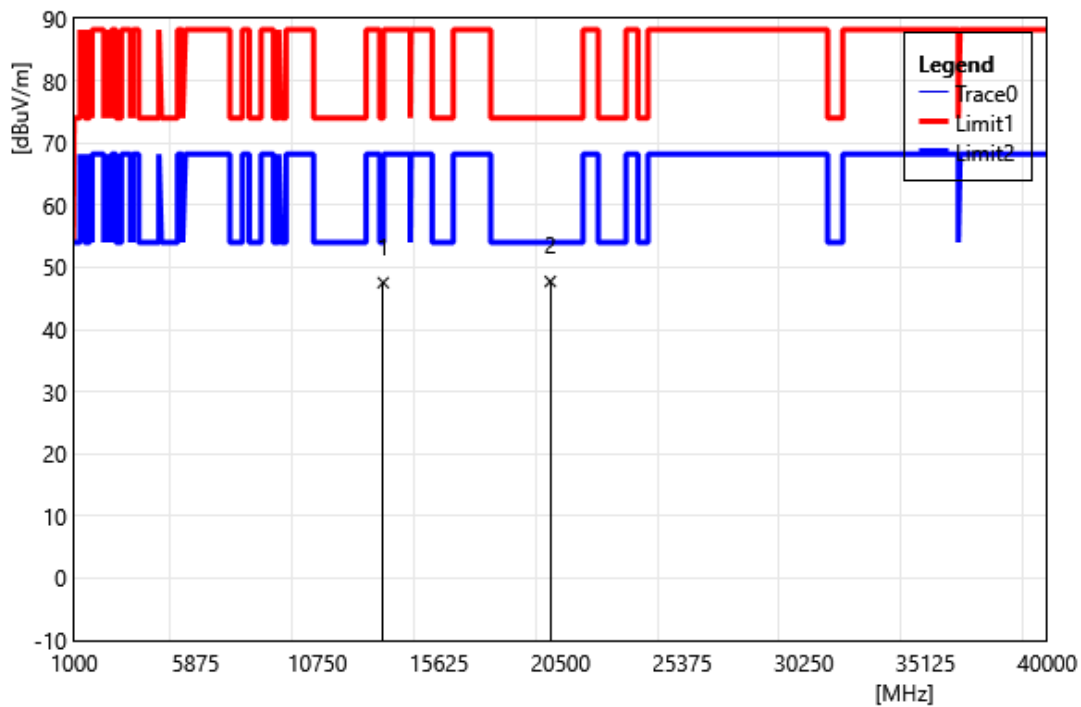


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	33.75	13.78	47.53	74.00	-26.47	PEAK
2	20085.00	31.51	16.22	47.73	74.00	-26.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6695		
	MHz		
Polarization:	Horizontal		
Remark:			

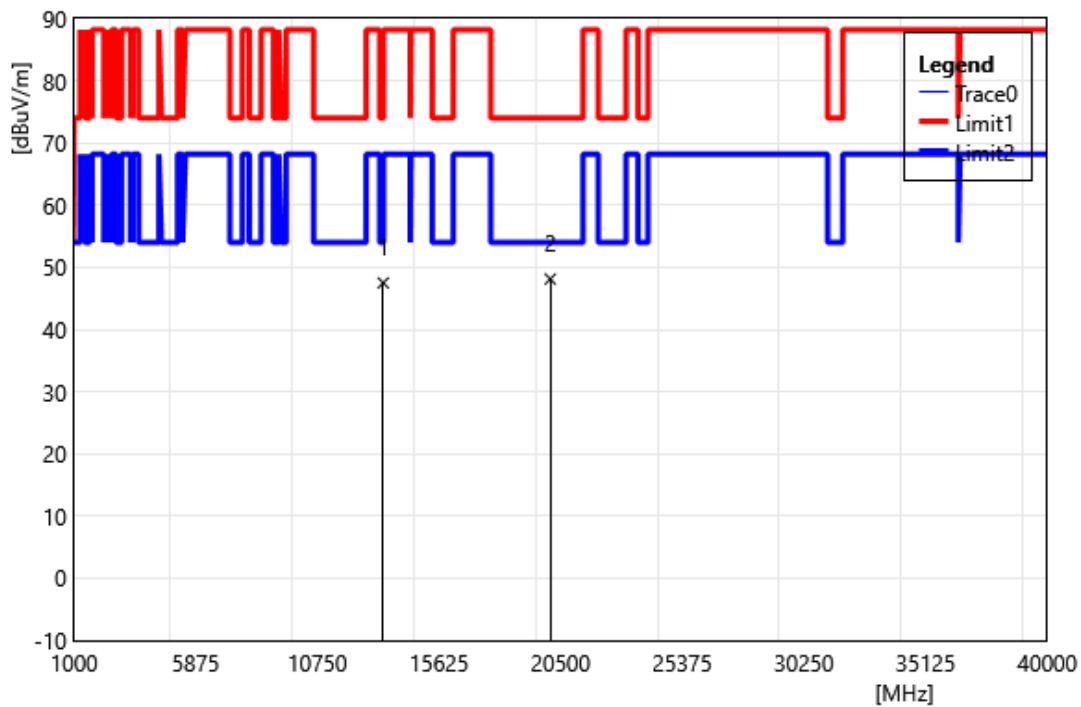


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	33.71	13.78	47.49	74.00	-26.51	PEAK
2	20085.00	31.90	16.22	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6855		
	MHz		
Polarization:	Vertical		
Remark:			

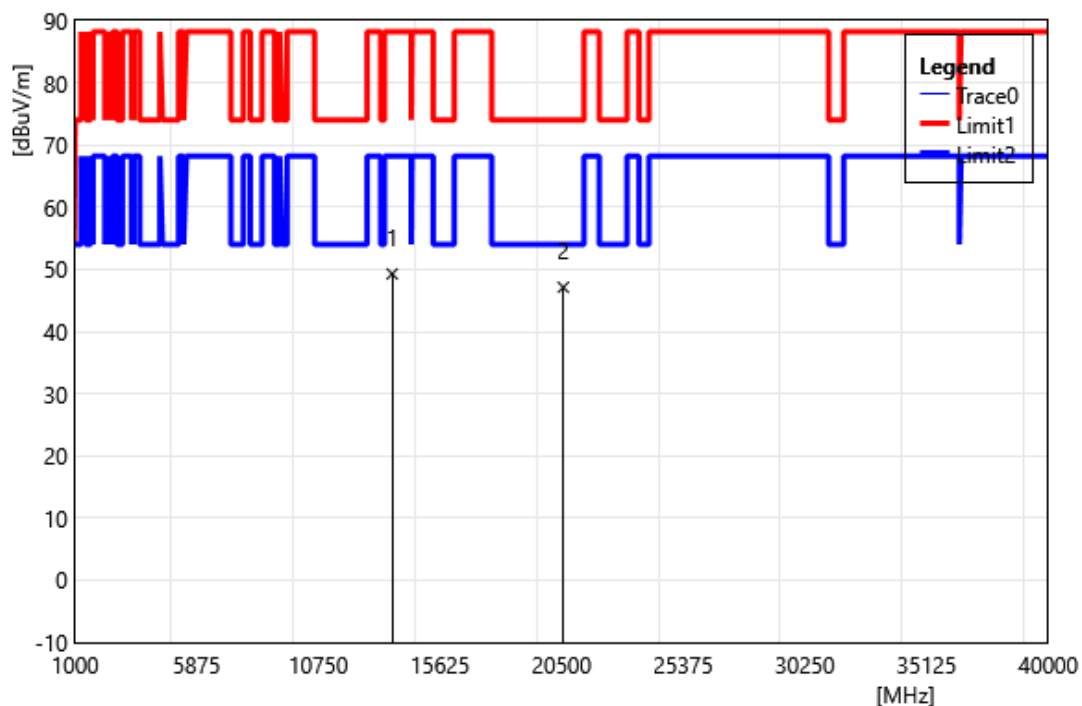


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	34.70	14.57	49.27	88.20	-38.93	PEAK
2	20565.00	30.53	16.59	47.12	74.00	-26.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6855		
	MHz		
Polarization:	Horizontal		
Remark:			

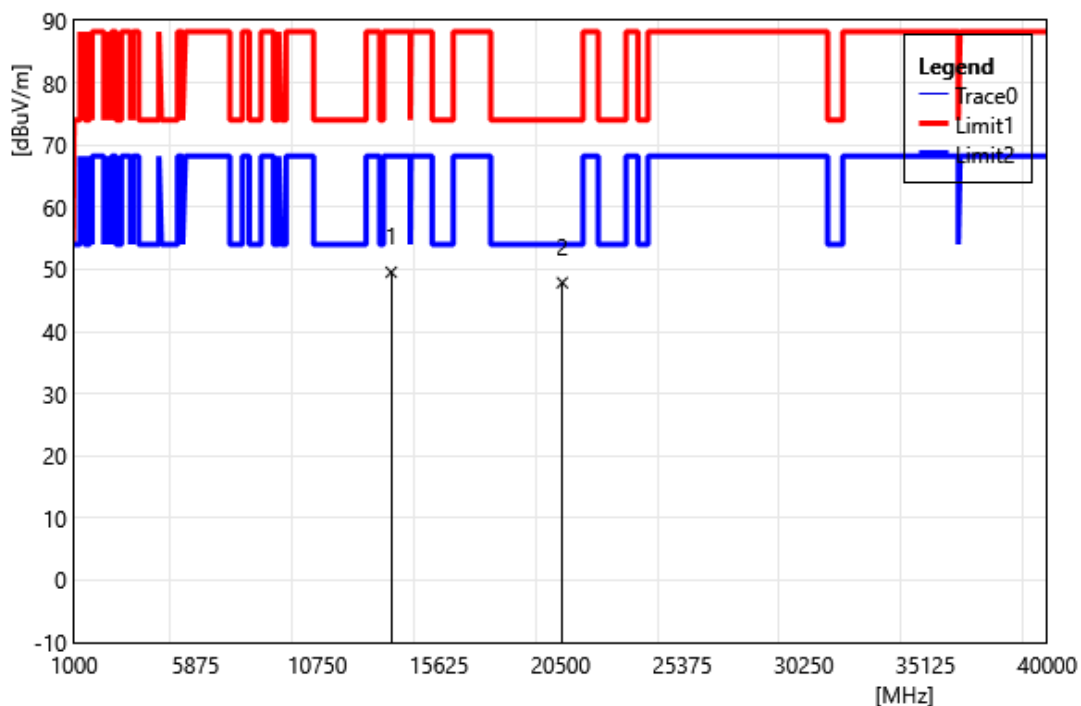


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	34.97	14.57	49.54	88.20	-38.66	PEAK
2	20565.00	31.26	16.59	47.85	74.00	-26.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6875		
	MHz		
Polarization:	Vertical		
Remark:			

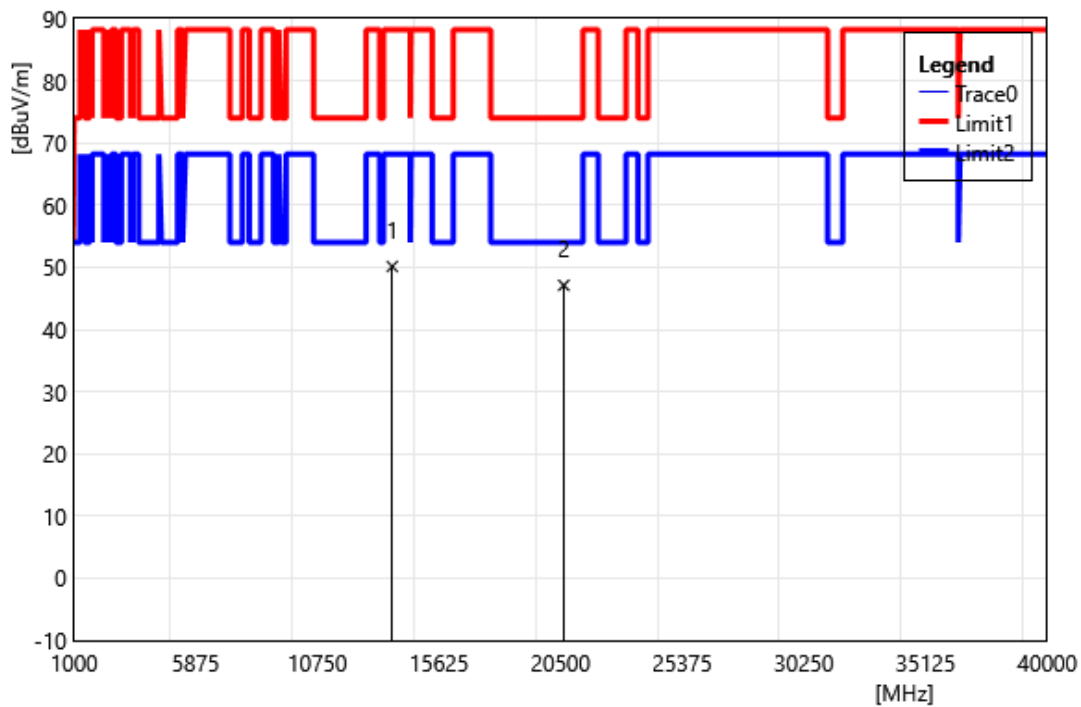


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	35.71	14.44	50.15	88.20	-38.05	PEAK
2	20625.00	30.45	16.66	47.11	74.00	-26.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6875		
	MHz		
Polarization:	Horizontal		
Remark:			

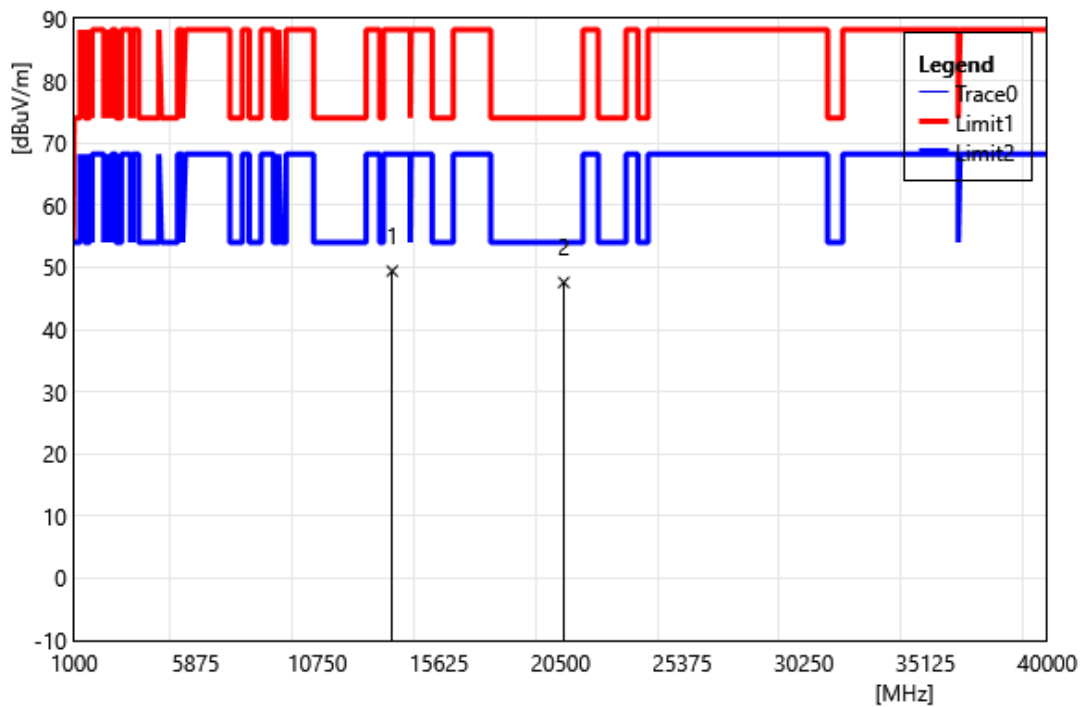


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	34.96	14.44	49.40	88.20	-38.80	PEAK
2	20625.00	30.90	16.66	47.56	74.00	-26.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6895		
	MHz		
Polarization:	Vertical		
Remark:			

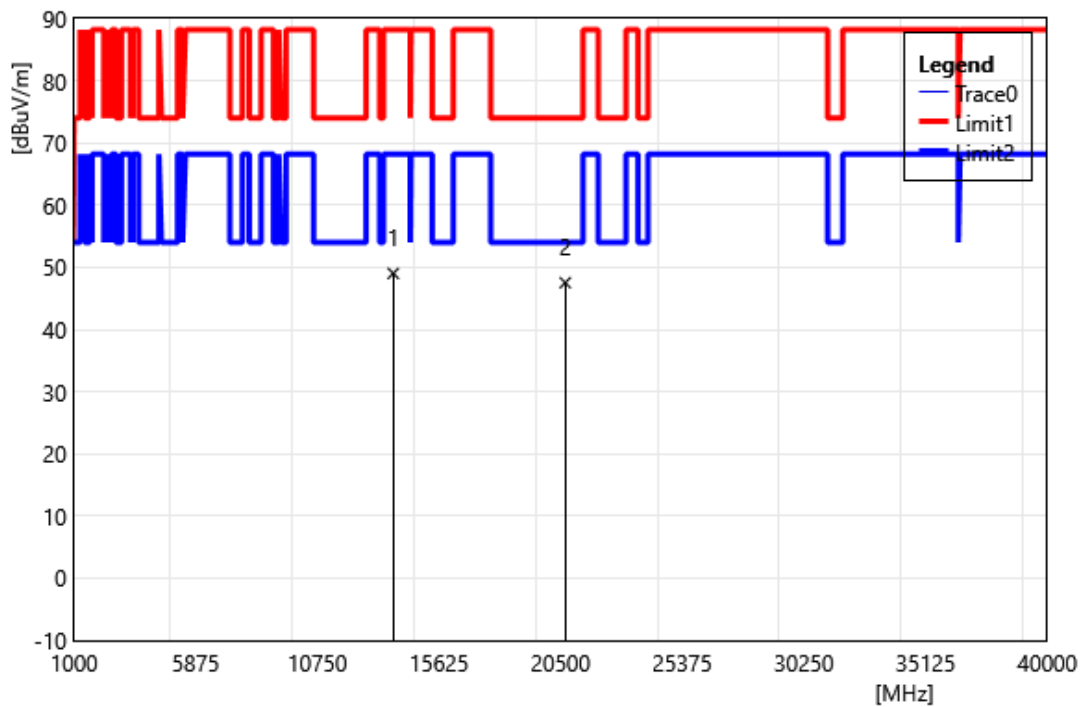


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	34.72	14.31	49.03	88.20	-39.17	PEAK
2	20685.00	30.80	16.74	47.54	74.00	-26.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6895		
	MHz		
Polarization:	Horizontal		
Remark:			

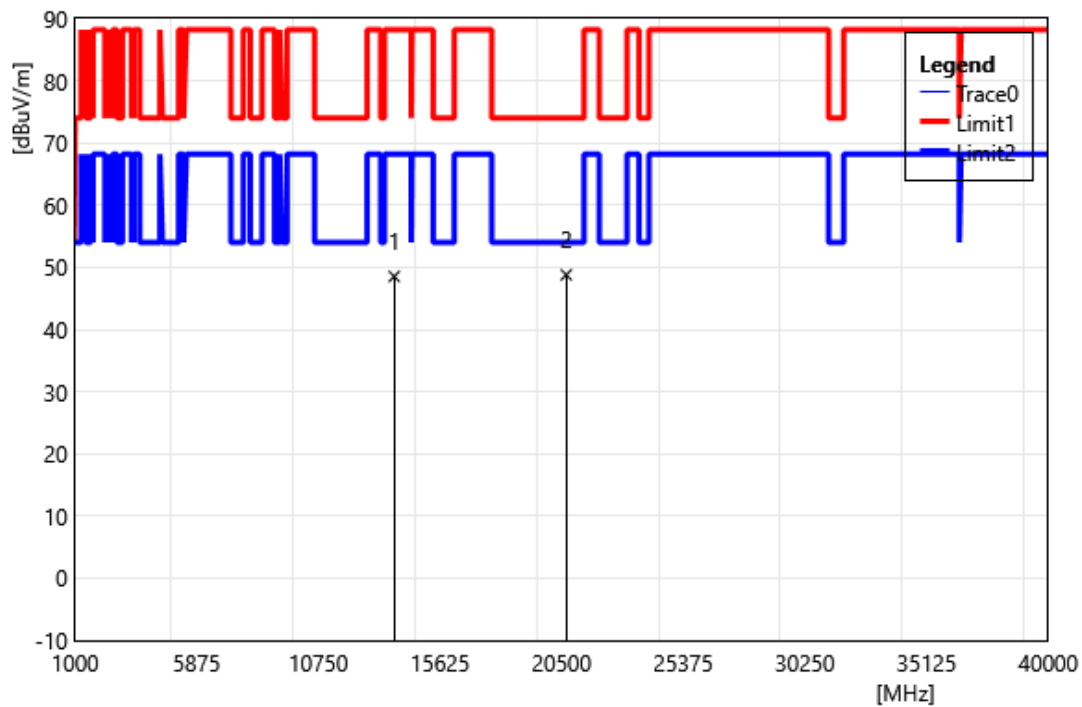


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	34.23	14.31	48.54	88.20	-39.66	PEAK
2	20685.00	32.06	16.74	48.80	74.00	-25.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6995		
	MHz		
Polarization:	Vertical		
Remark:			

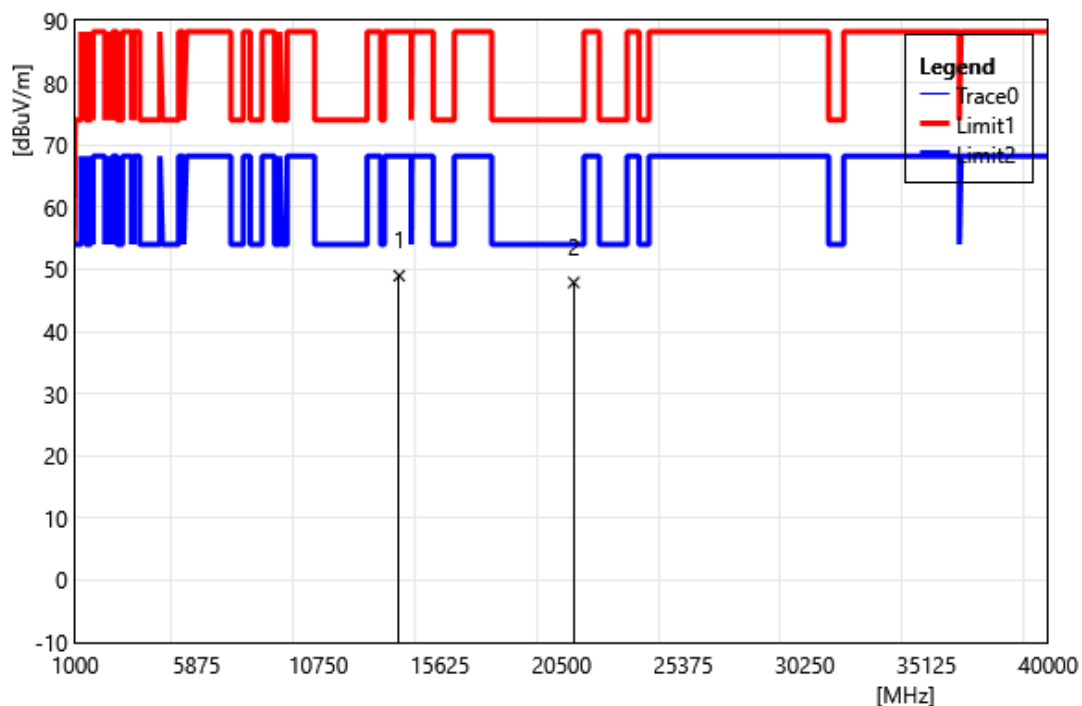


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	34.12	14.85	48.97	88.20	-39.23	PEAK
2	20985.00	30.77	17.12	47.89	74.00	-26.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6995		
	MHz		
Polarization:	Horizontal		
Remark:			

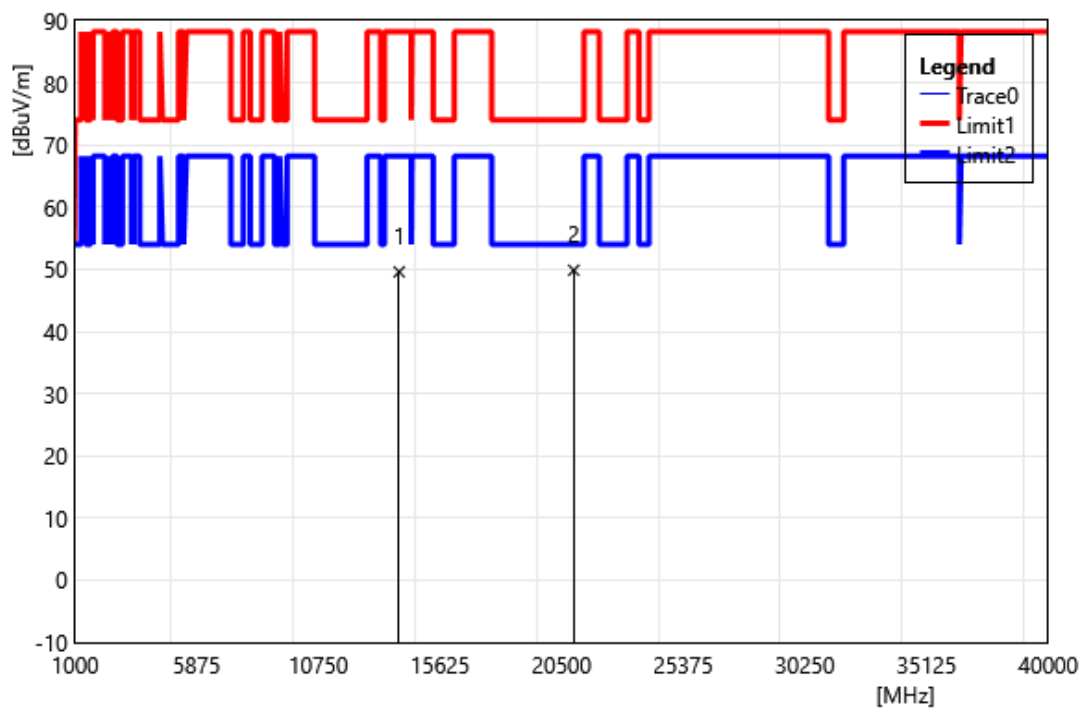


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	34.74	14.85	49.59	88.20	-38.61	PEAK
2	20985.00	32.73	17.12	49.85	74.00	-24.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

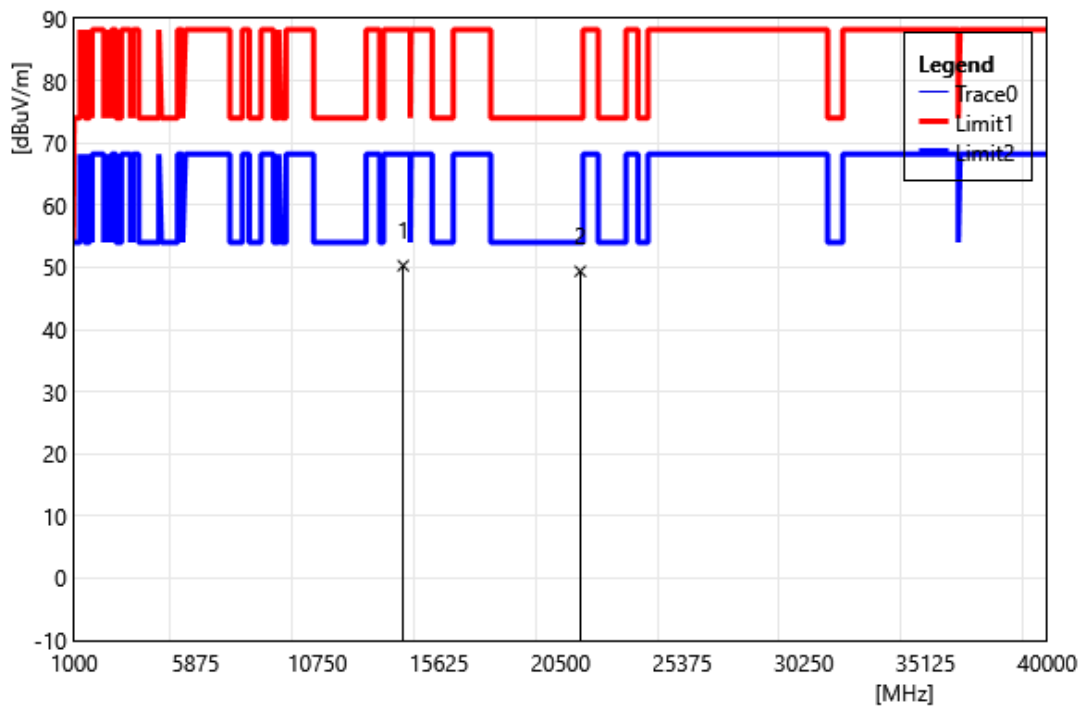


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14190.00	34.77	15.49	50.26	88.20	-37.94	PEAK
2	21285.00	32.98	16.39	49.37	74.00	-24.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

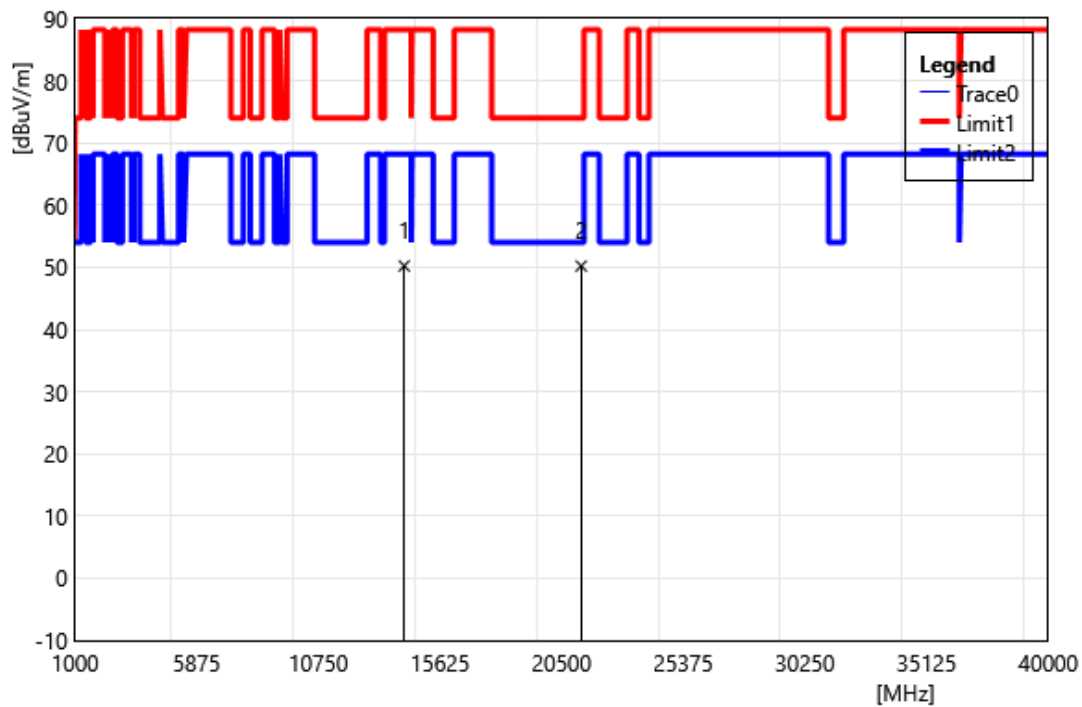


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14190.00	34.73	15.49	50.22	88.20	-37.98	PEAK
2	21285.00	33.82	16.39	50.21	74.00	-23.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

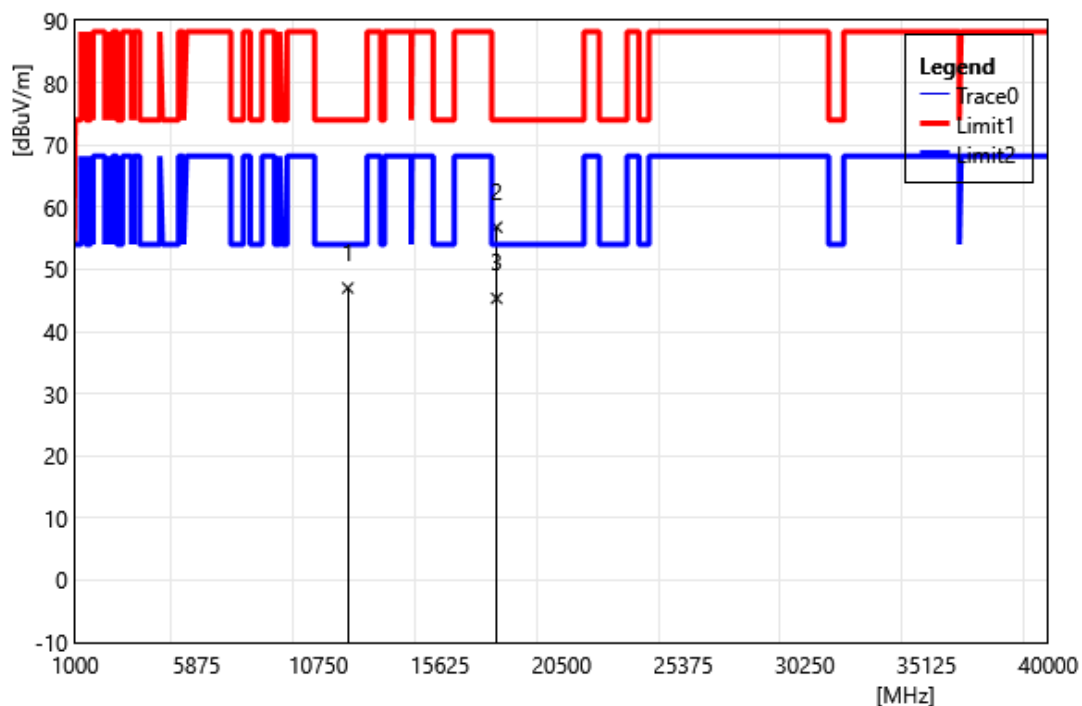


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	35.31	11.70	47.01	74.00	-26.99	PEAK
2	17895.00	32.18	24.60	56.78	74.00	-17.22	PEAK
3	17895.00	20.74	24.60	45.34	54.00	-8.66	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

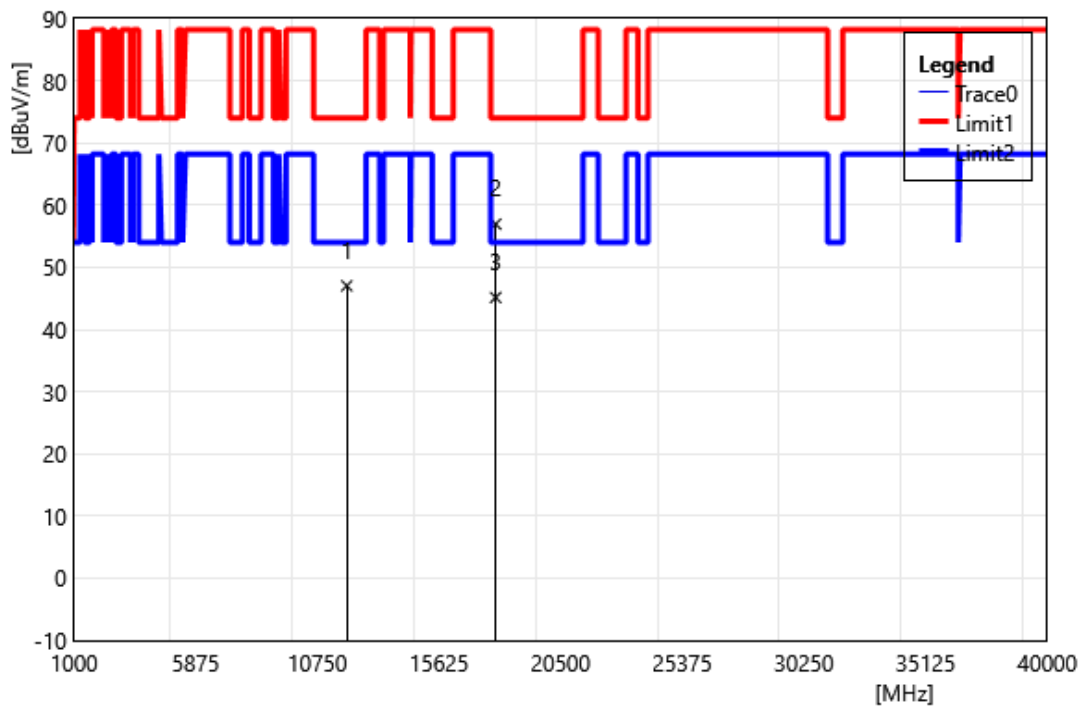


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	35.33	11.70	47.03	74.00	-26.97	PEAK
2	17895.00	32.36	24.60	56.96	74.00	-17.04	PEAK
3	17895.00	20.55	24.60	45.15	54.00	-8.85	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6165		
	MHz		
Polarization:	Vertical		
Remark:			

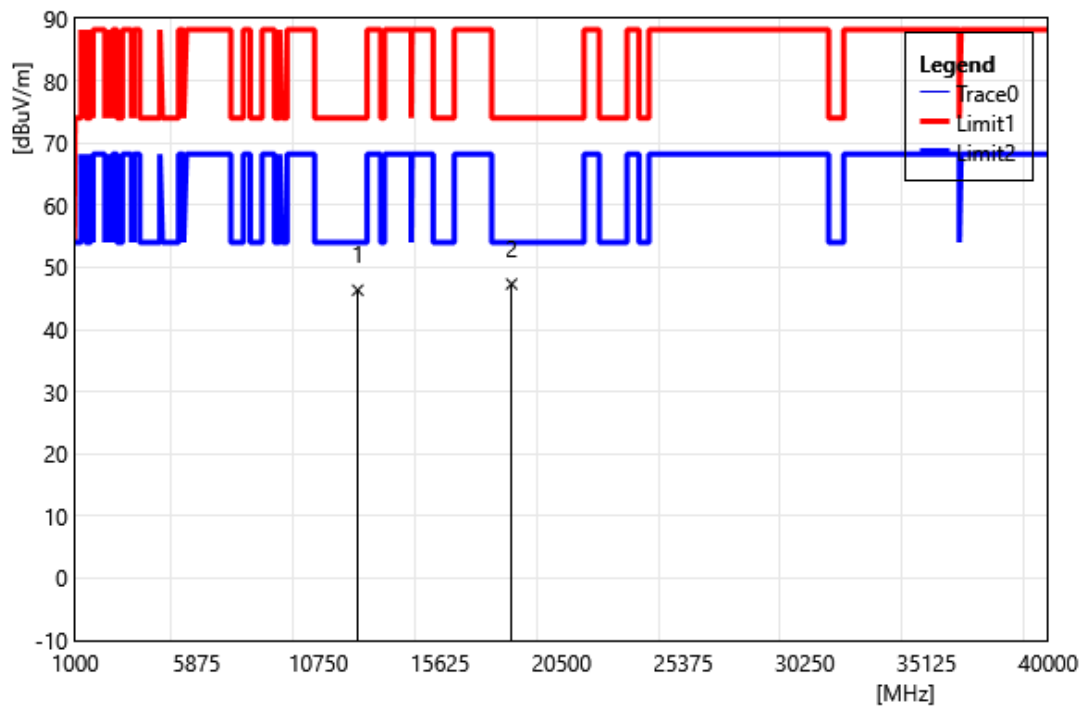


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	34.56	11.76	46.32	74.00	-27.68	PEAK
2	18495.00	31.88	15.42	47.30	74.00	-26.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6165		
	MHz		
Polarization:	Horizontal		
Remark:			

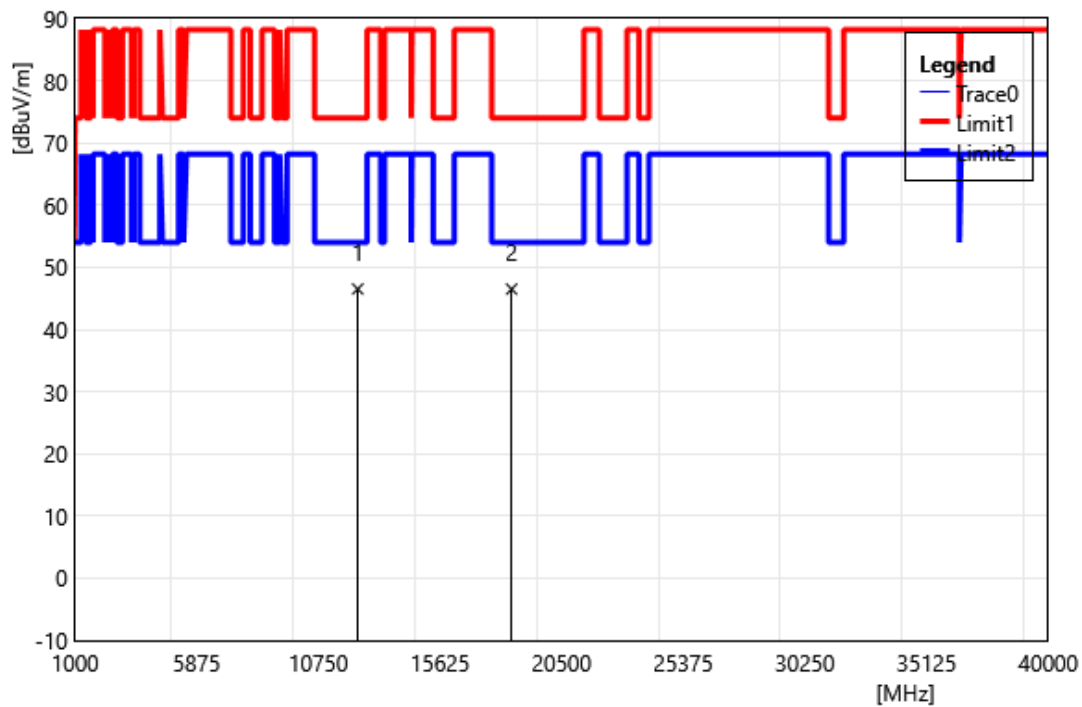


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	34.76	11.76	46.52	74.00	-27.48	PEAK
2	18495.00	31.09	15.42	46.51	74.00	-27.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6405		
	MHz		
Polarization:	Vertical		
Remark:			

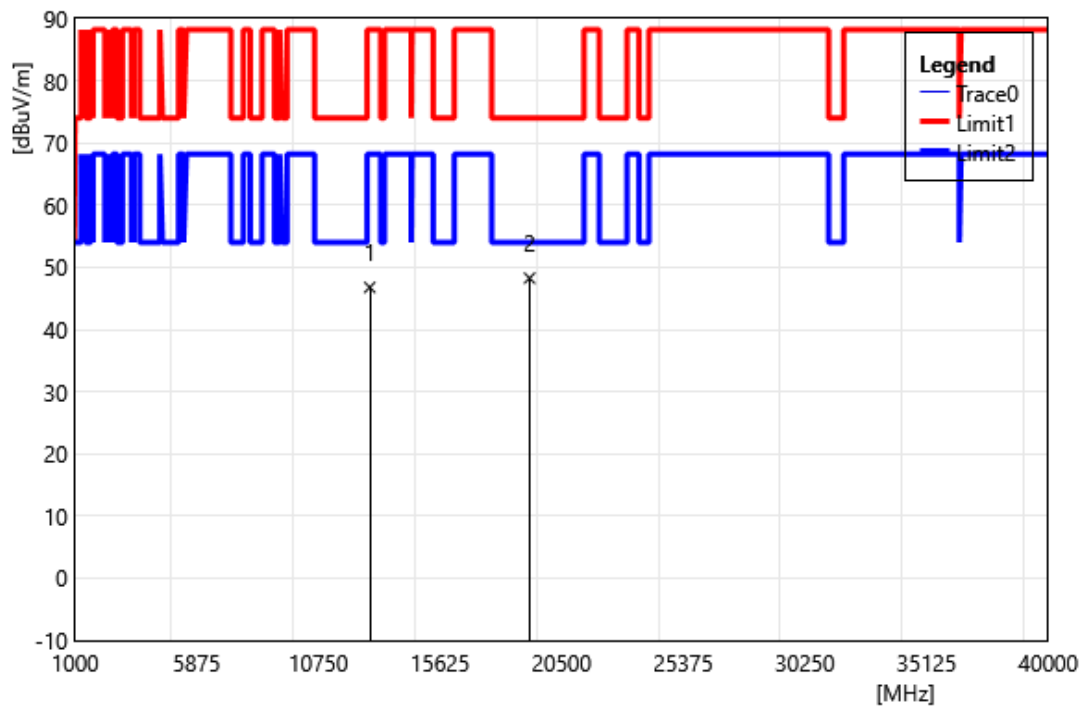


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	34.02	12.75	46.77	88.20	-41.43	PEAK
2	19215.00	32.29	15.98	48.27	74.00	-25.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6405		
	MHz		
Polarization:	Horizontal		
Remark:			

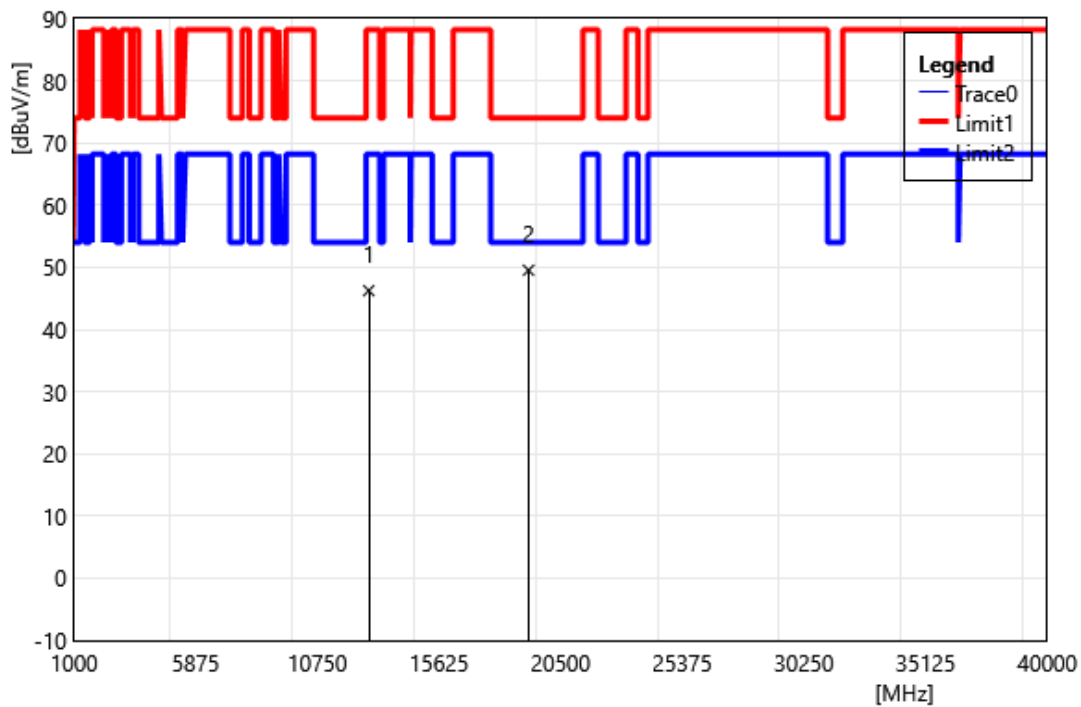


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	33.49	12.75	46.25	88.20	-41.96	PEAK
2	19215.00	33.57	15.98	49.55	74.00	-24.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6445		
	MHz		
Polarization:	Vertical		
Remark:			

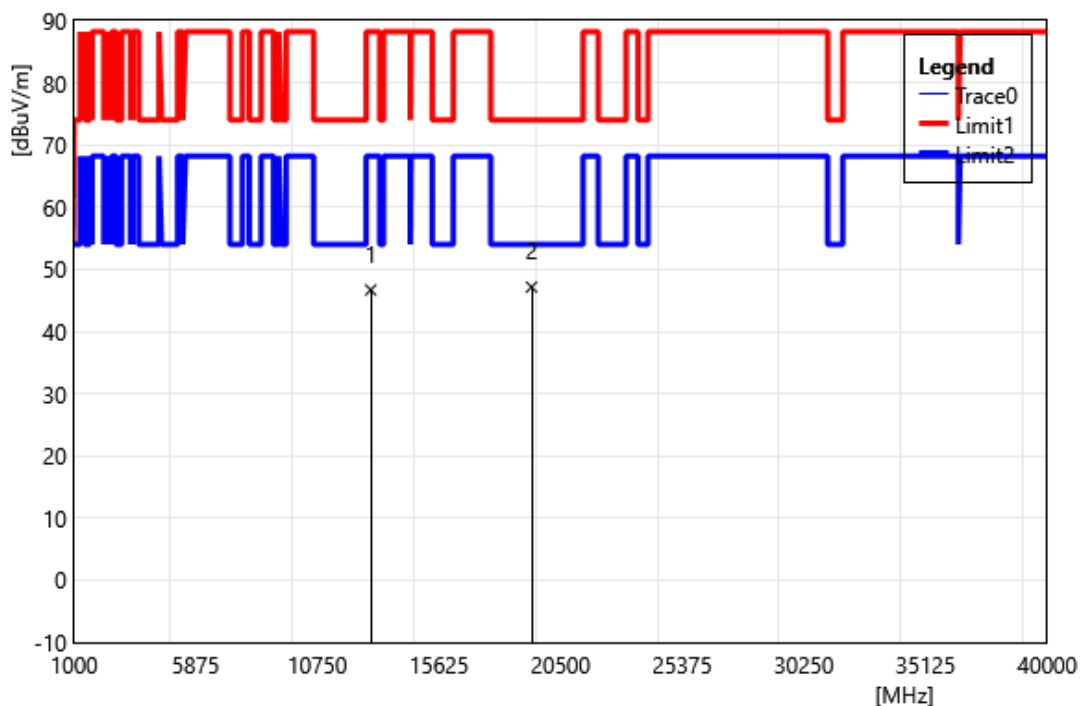


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	33.87	12.83	46.70	88.20	-41.50	PEAK
2	19335.00	30.93	16.21	47.14	74.00	-26.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6445		
	MHz		
Polarization:	Horizontal		
Remark:			

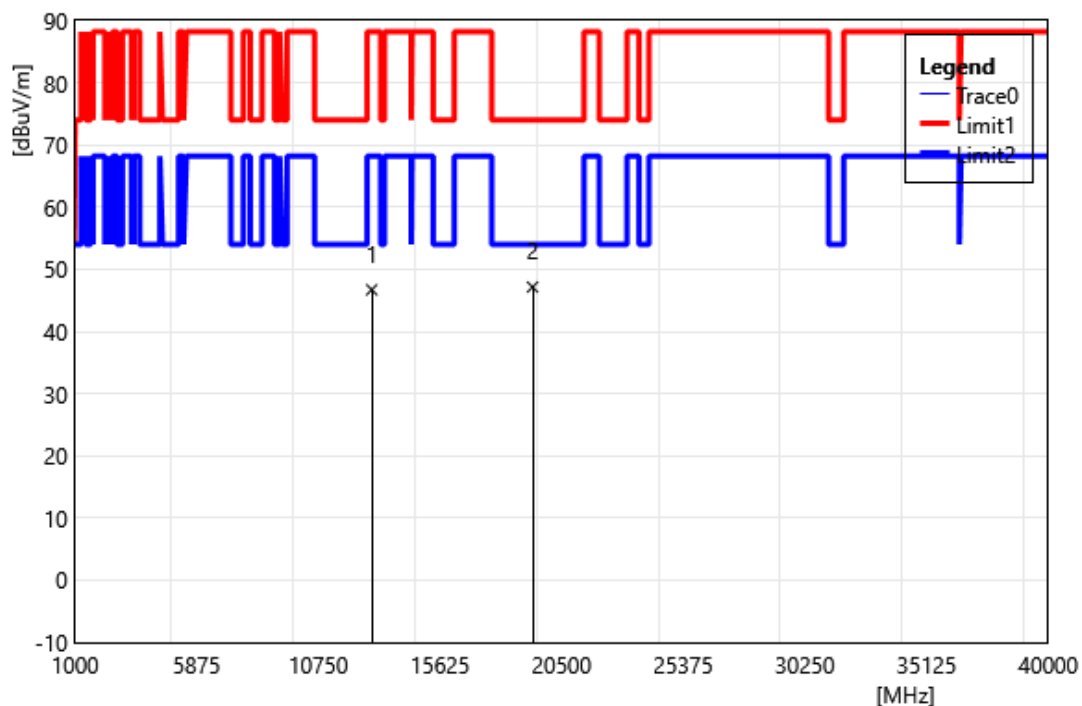


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	33.89	12.83	46.72	88.20	-41.48	PEAK
2	19335.00	30.95	16.21	47.16	74.00	-26.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6485		
	MHz		
Polarization:	Vertical		
Remark:			

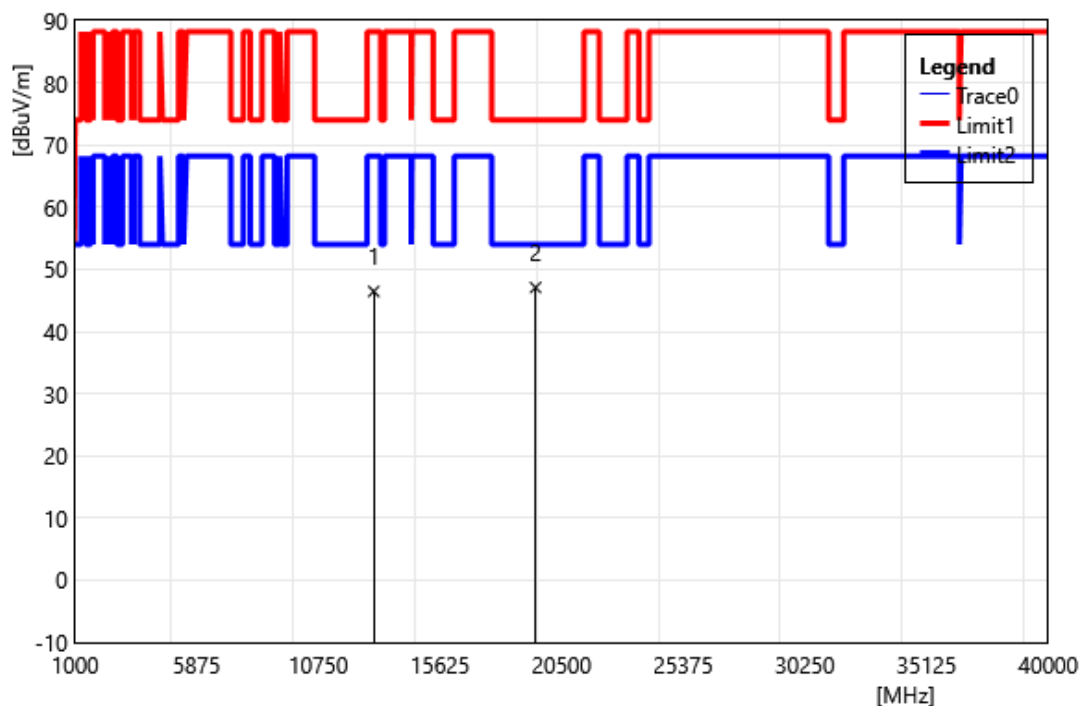


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	33.48	12.98	46.46	88.20	-41.74	PEAK
2	19455.00	30.64	16.44	47.08	74.00	-26.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6485		
	MHz		
Polarization:	Horizontal		
Remark:			

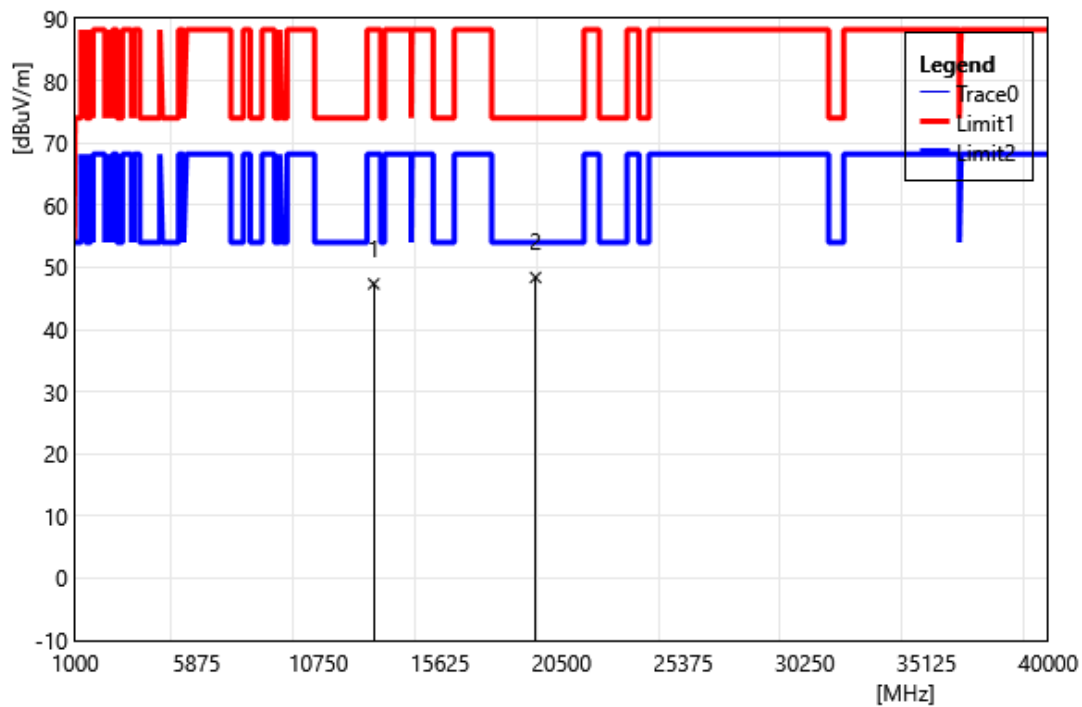


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	34.37	12.98	47.35	88.20	-40.85	PEAK
2	19455.00	31.93	16.44	48.37	74.00	-25.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6525		
	MHz		
Polarization:	Vertical		
Remark:			

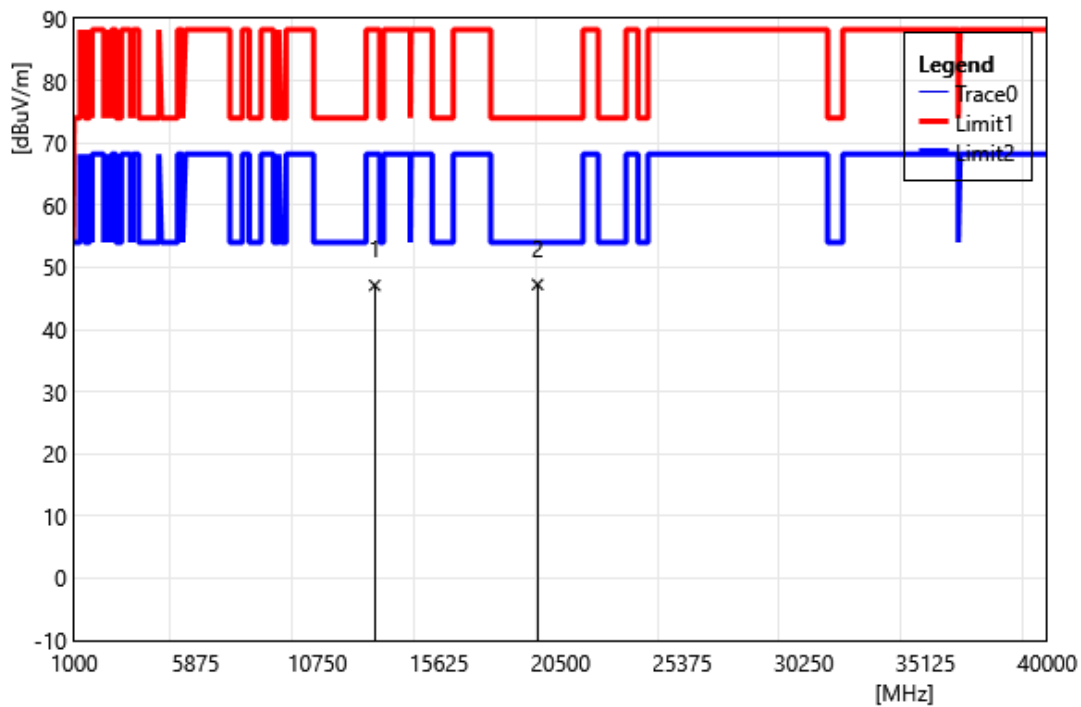


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	34.12	12.99	47.11	88.20	-41.09	PEAK
2	19575.00	31.35	15.89	47.24	74.00	-26.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6525		
	MHz		
Polarization:	Horizontal		
Remark:			

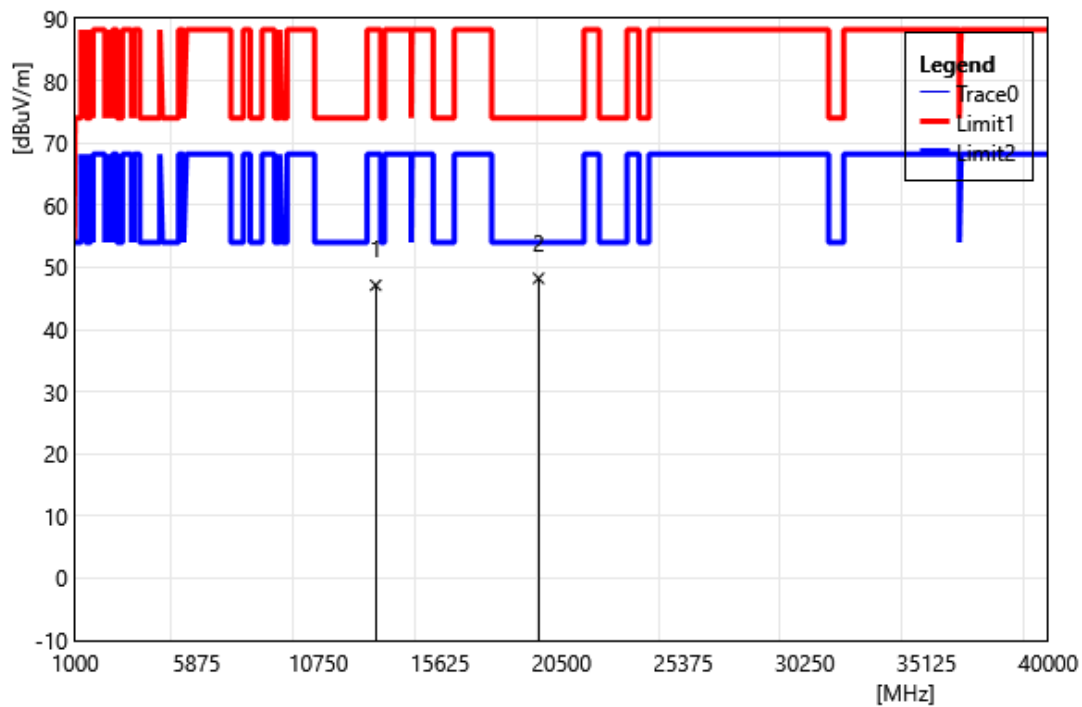


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	34.14	12.99	47.13	88.20	-41.07	PEAK
2	19575.00	32.34	15.89	48.23	74.00	-25.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6565		
	MHz		
Polarization:	Vertical		
Remark:			

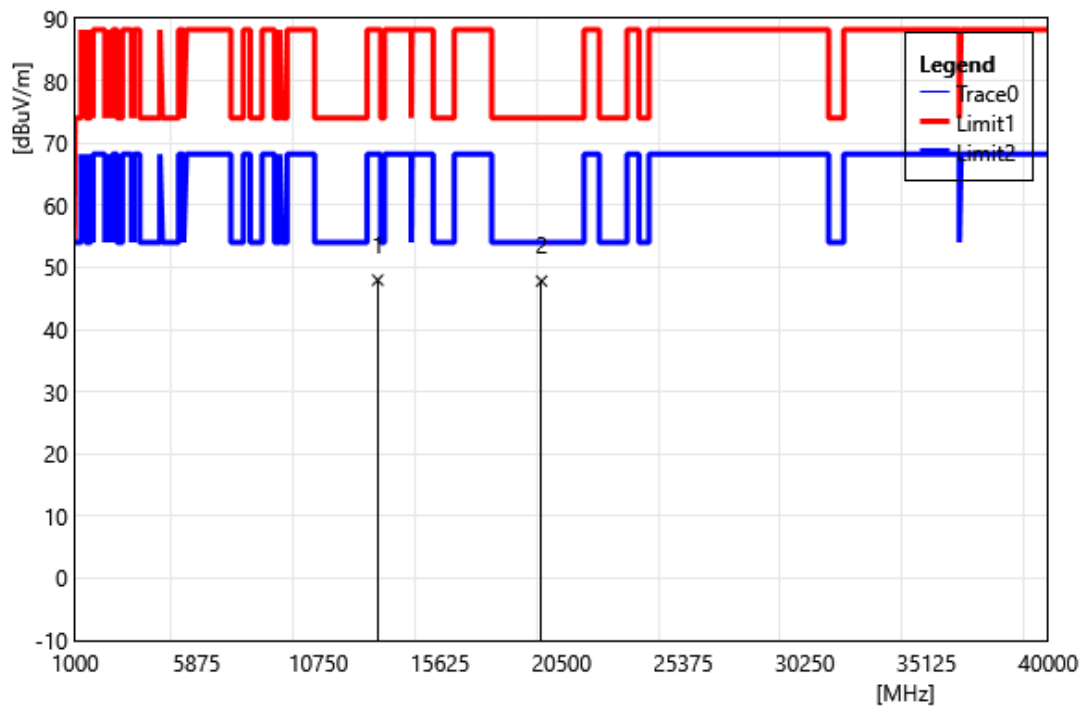


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	34.94	13.00	47.94	88.20	-40.26	PEAK
2	19695.00	31.72	16.07	47.79	74.00	-26.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6565		
	MHz		
Polarization:	Horizontal		
Remark:			

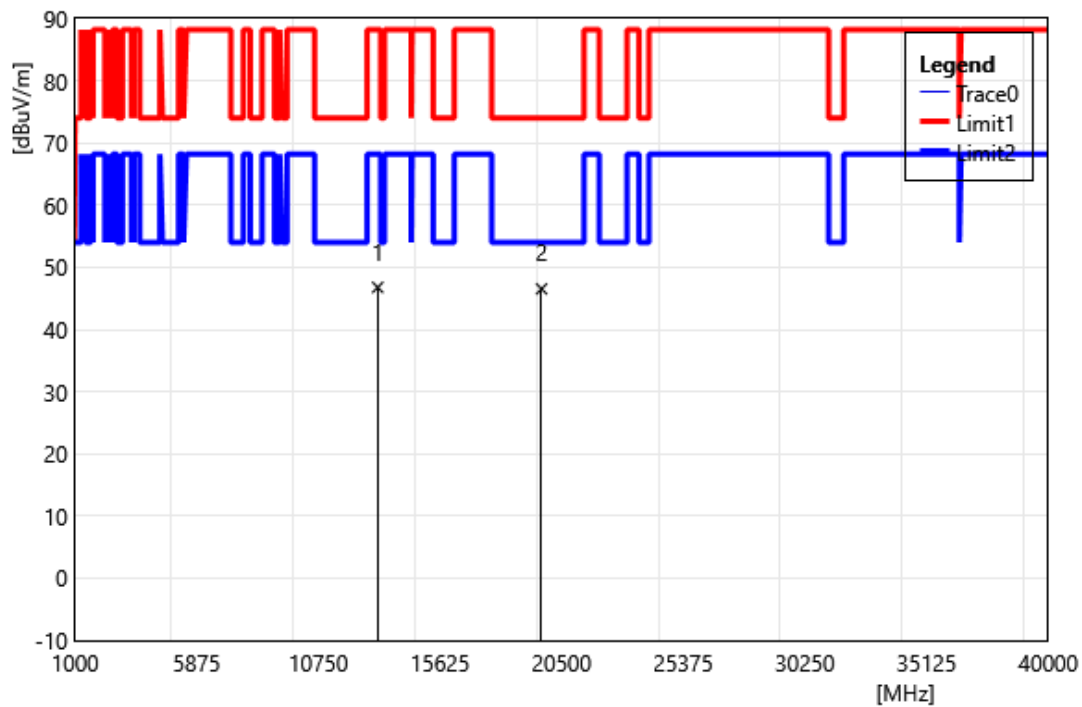


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	33.78	13.00	46.78	88.20	-41.42	PEAK
2	19695.00	30.47	16.07	46.54	74.00	-27.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6685		
	MHz		
Polarization:	Vertical		
Remark:			

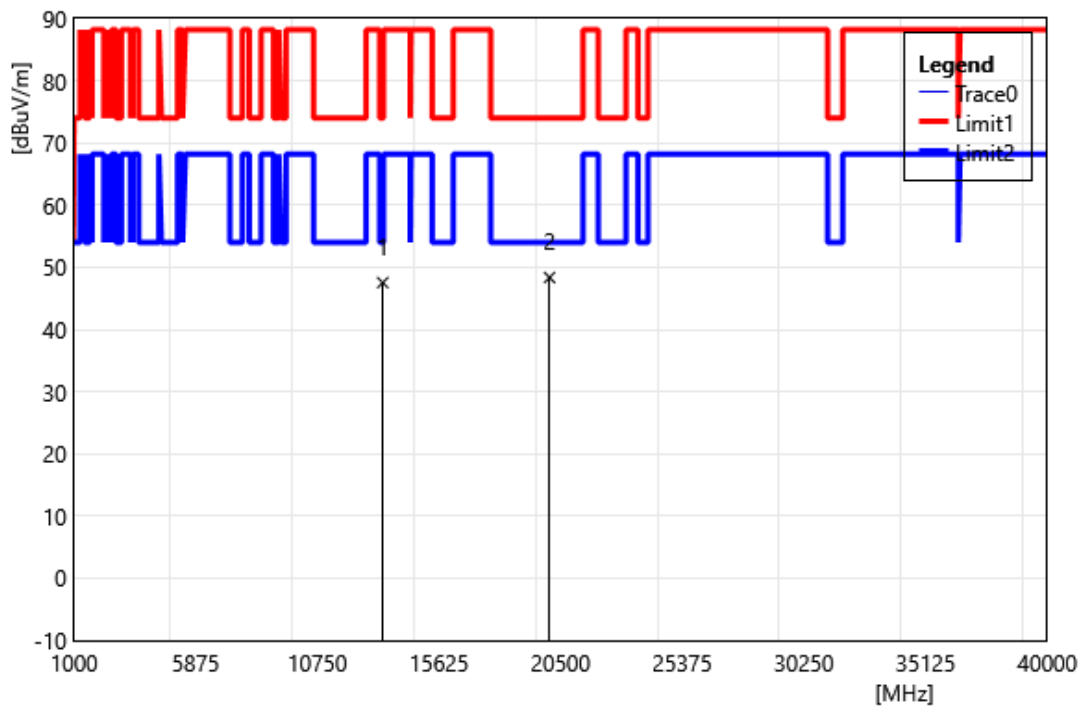


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	33.86	13.68	47.54	74.00	-26.46	PEAK
2	20055.00	32.18	16.18	48.36	74.00	-25.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6685		
	MHz		
Polarization:	Horizontal		
Remark:			

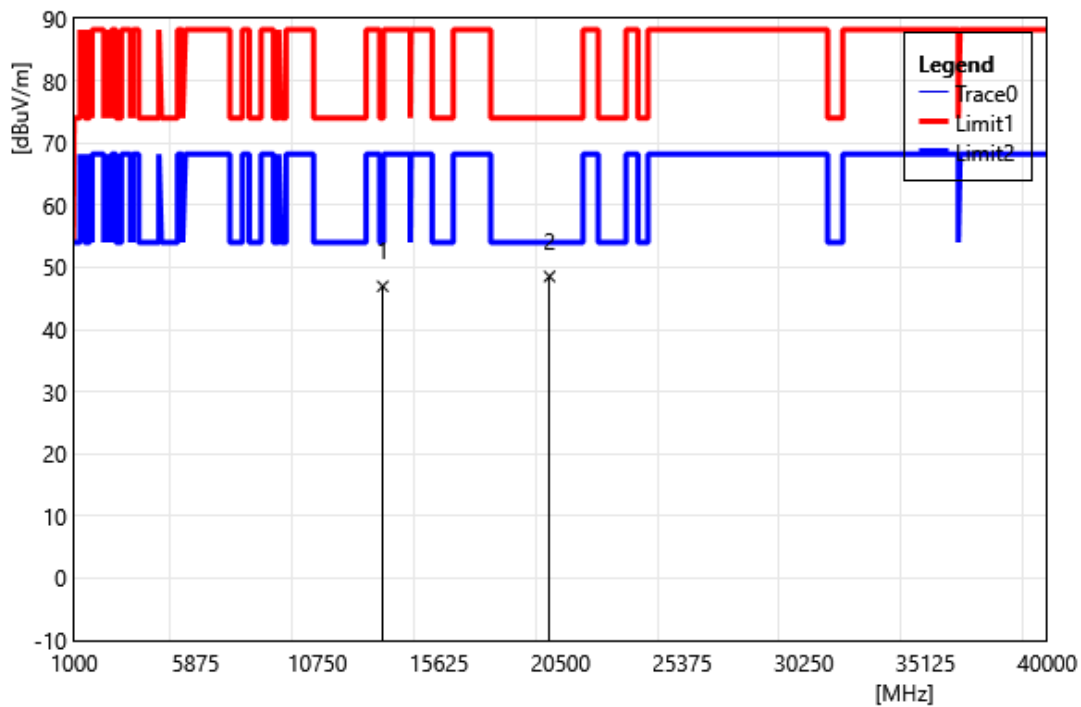


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	33.28	13.68	46.96	74.00	-27.04	PEAK
2	20055.00	32.35	16.18	48.53	74.00	-25.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6845		
	MHz		
Polarization:	Vertical		
Remark:			

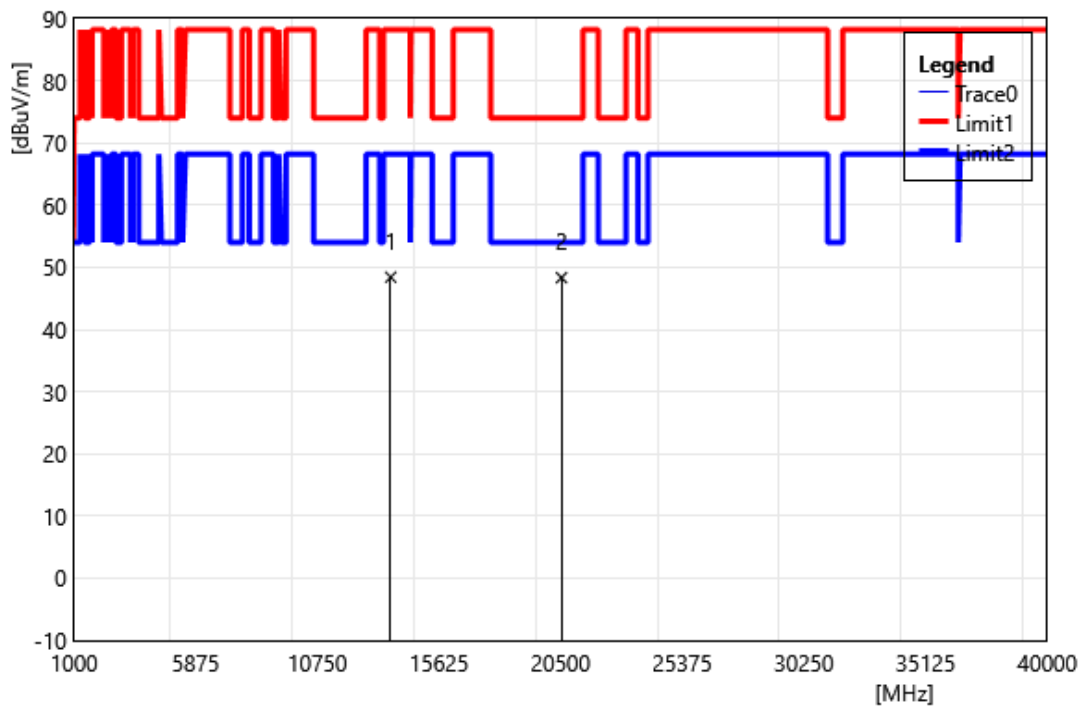


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	33.84	14.58	48.42	88.20	-39.78	PEAK
2	20535.00	31.79	16.55	48.34	74.00	-25.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6845		
	MHz		
Polarization:	Horizontal		
Remark:			

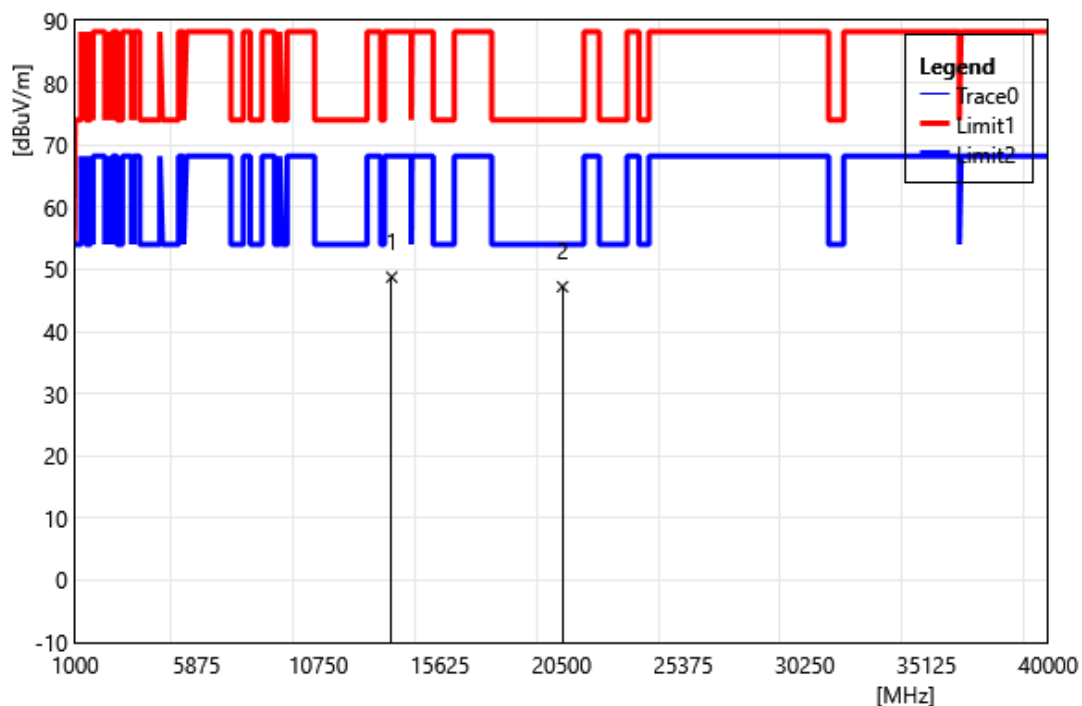


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	34.18	14.58	48.76	88.20	-39.44	PEAK
2	20535.00	30.66	16.55	47.21	74.00	-26.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6885		
	MHz		
Polarization:	Vertical		
Remark:			

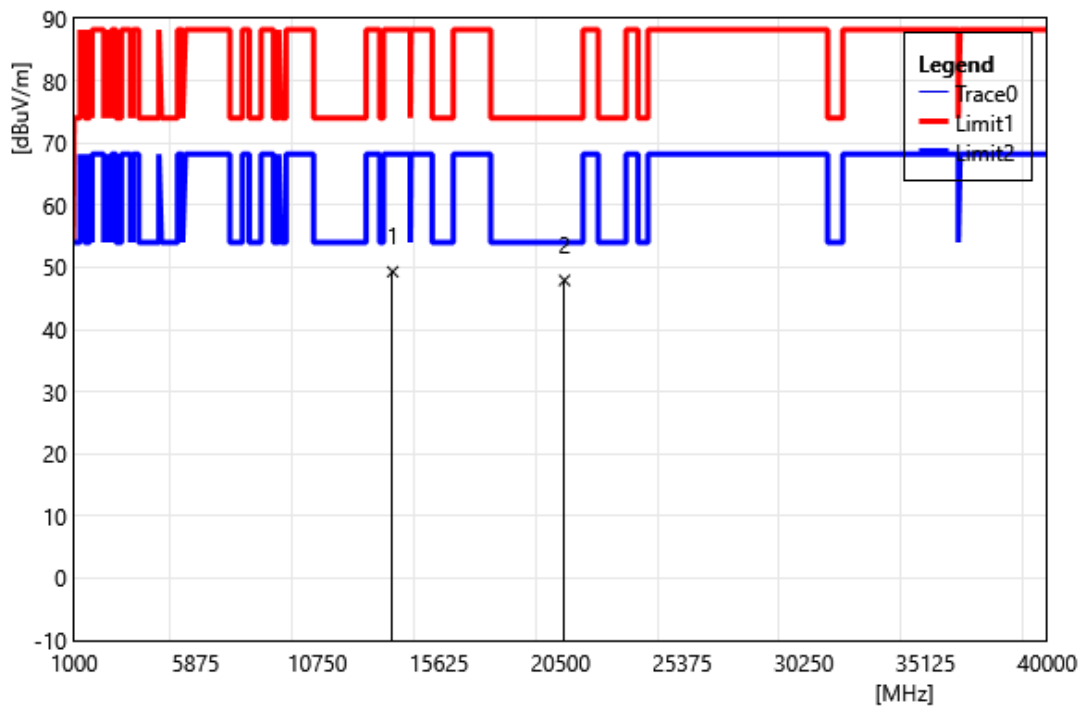


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	34.91	14.38	49.29	88.20	-38.91	PEAK
2	20655.00	31.20	16.70	47.90	74.00	-26.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6885		
	MHz		
Polarization:	Horizontal		
Remark:			

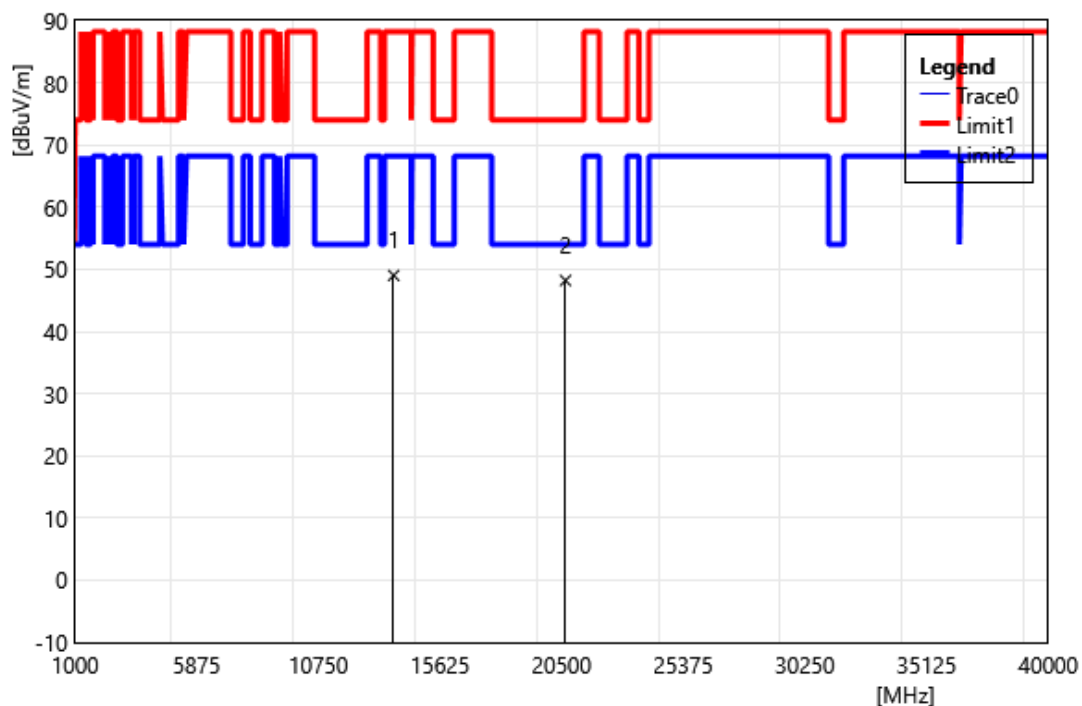


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	34.64	14.38	49.02	88.20	-39.18	PEAK
2	20655.00	31.52	16.70	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6925		
	MHz		
Polarization:	Vertical		
Remark:			

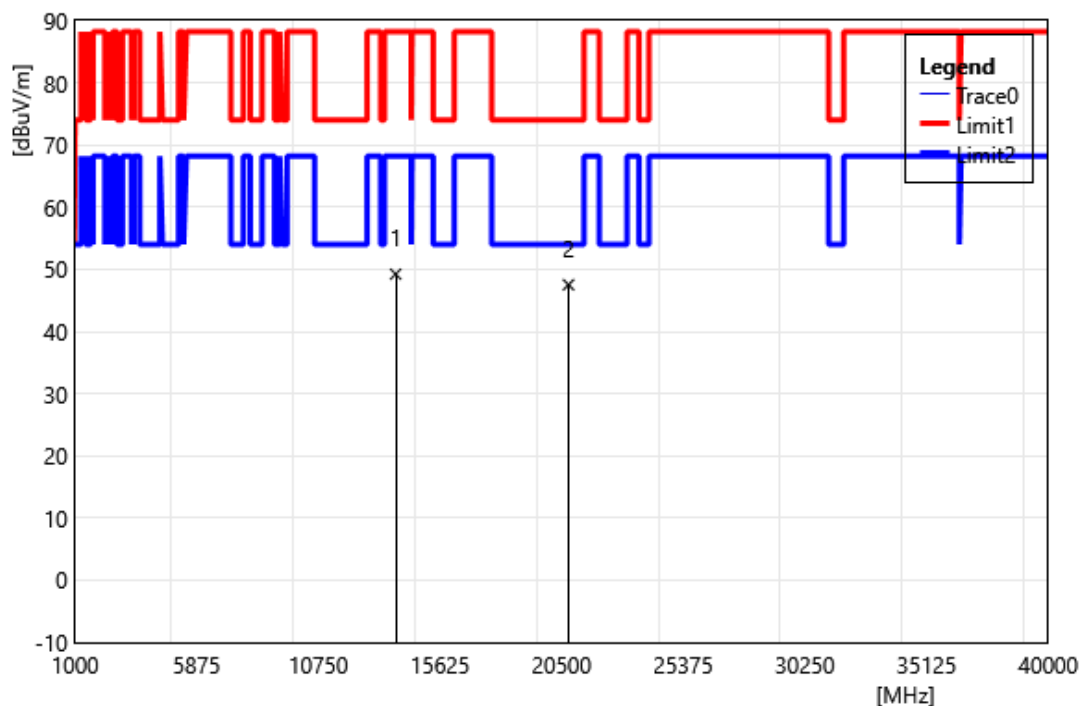


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	34.65	14.57	49.22	88.20	-38.98	PEAK
2	20775.00	30.67	16.85	47.52	74.00	-26.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6925		
	MHz		
Polarization:	Horizontal		
Remark:			

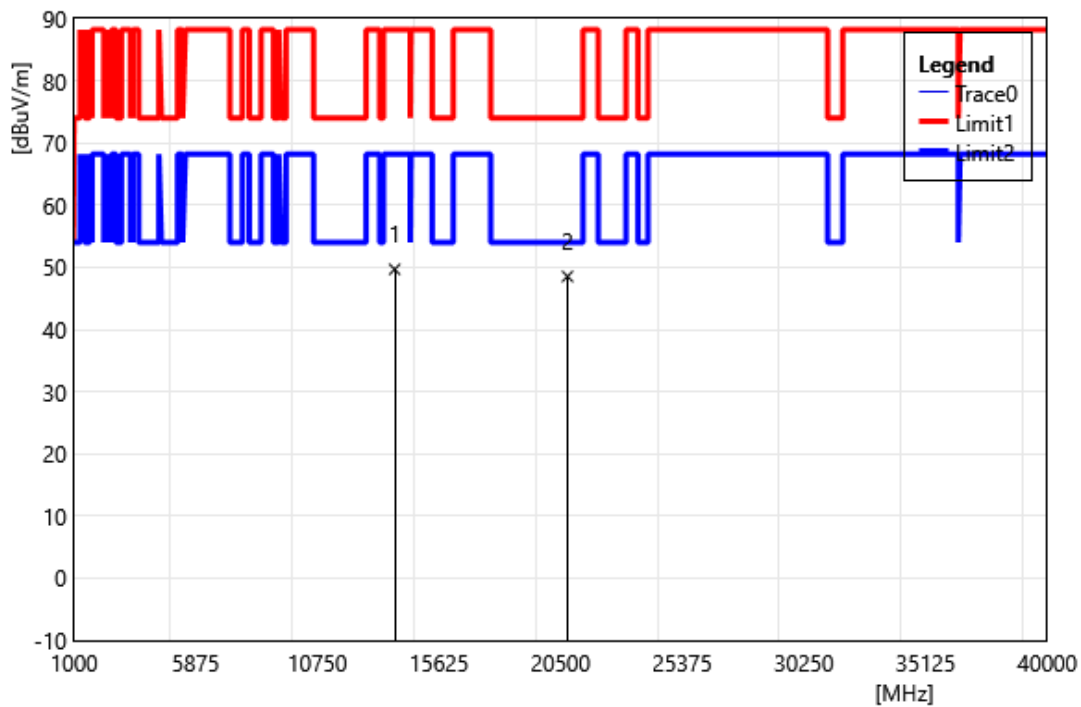


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	35.12	14.57	49.69	88.20	-38.51	PEAK
2	20775.00	31.69	16.85	48.54	74.00	-25.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7005		
	MHz		
Polarization:	Vertical		
Remark:			

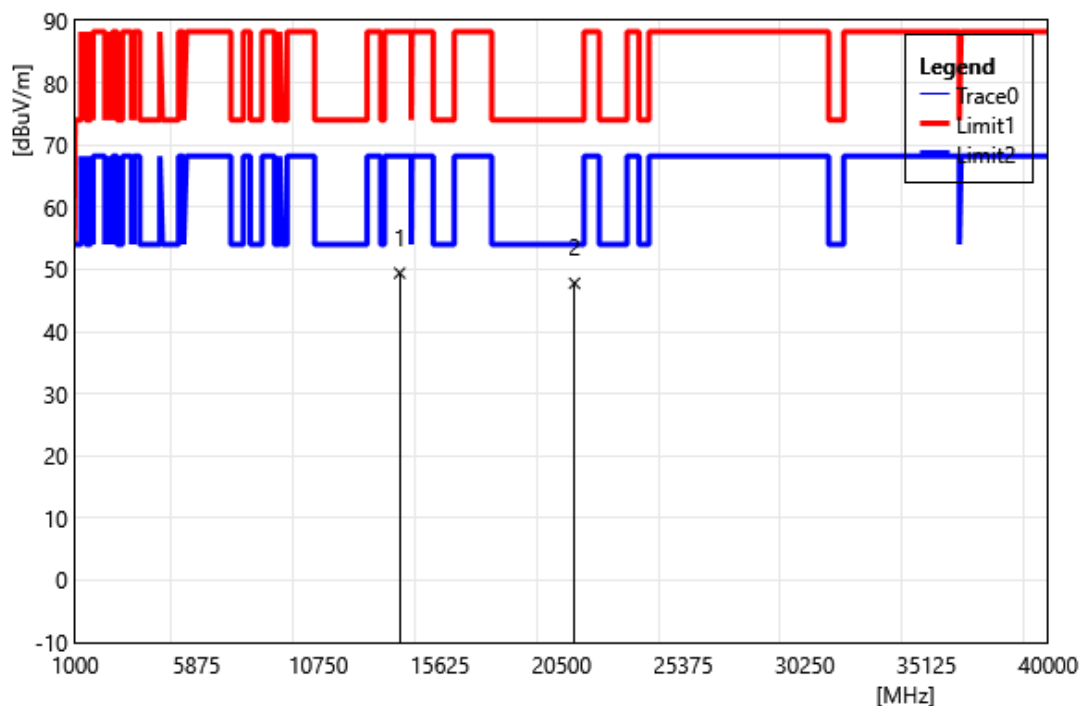


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	34.47	14.92	49.39	88.20	-38.81	PEAK
2	21015.00	31.65	16.12	47.77	74.00	-26.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7005		
	MHz		
Polarization:	Horizontal		
Remark:			

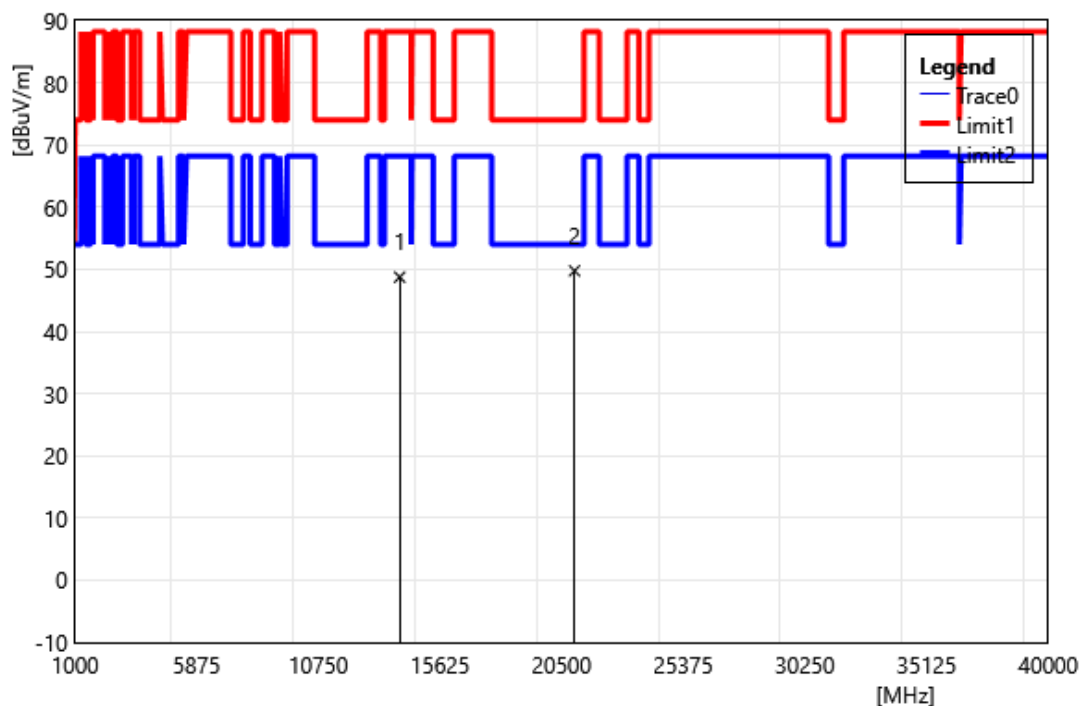


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	33.83	14.92	48.75	88.20	-39.45	PEAK
2	21015.00	33.64	16.12	49.76	74.00	-24.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

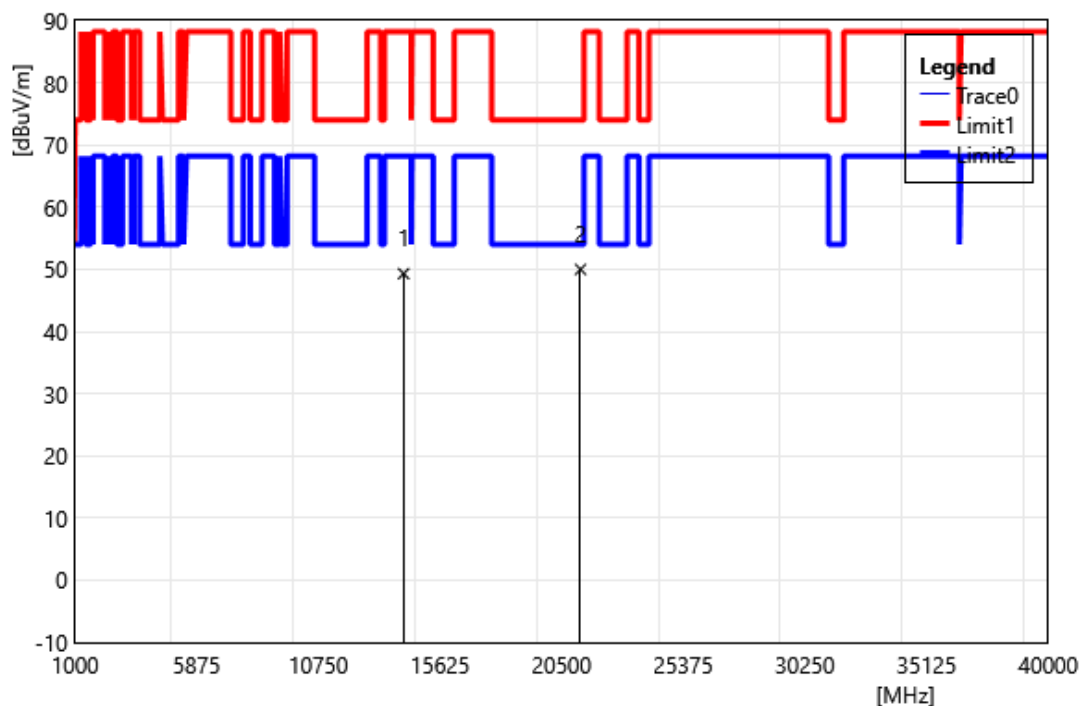


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	33.80	15.51	49.31	88.20	-38.89	PEAK
2	21255.00	33.62	16.36	49.98	74.00	-24.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

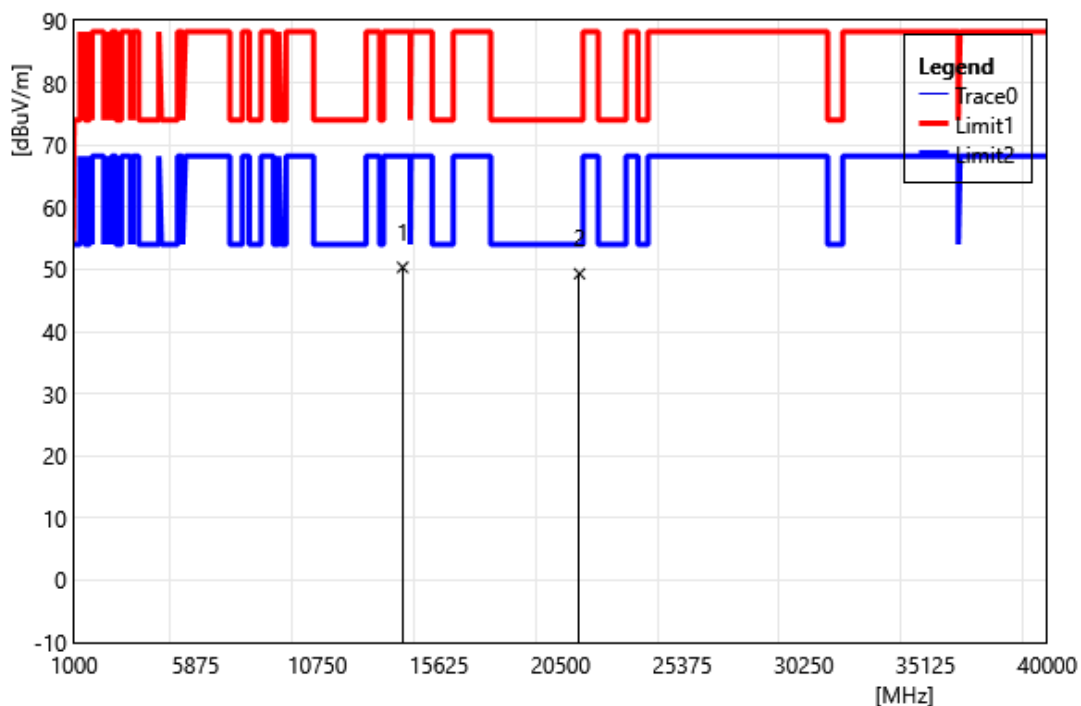


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	34.81	15.51	50.32	88.20	-37.88	PEAK
2	21255.00	32.94	16.36	49.30	74.00	-24.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

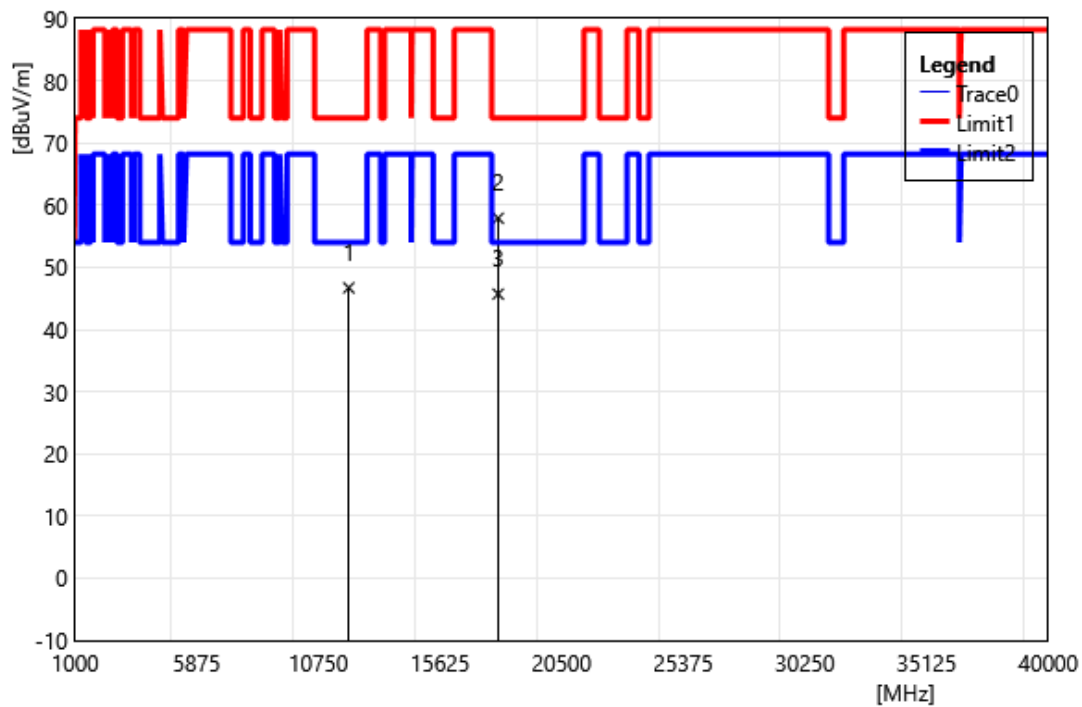


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	34.92	11.79	46.71	74.00	-27.29	PEAK
2	17955.00	32.37	25.54	57.91	74.00	-16.09	PEAK
3	17955.00	20.17	25.54	45.71	54.00	-8.29	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

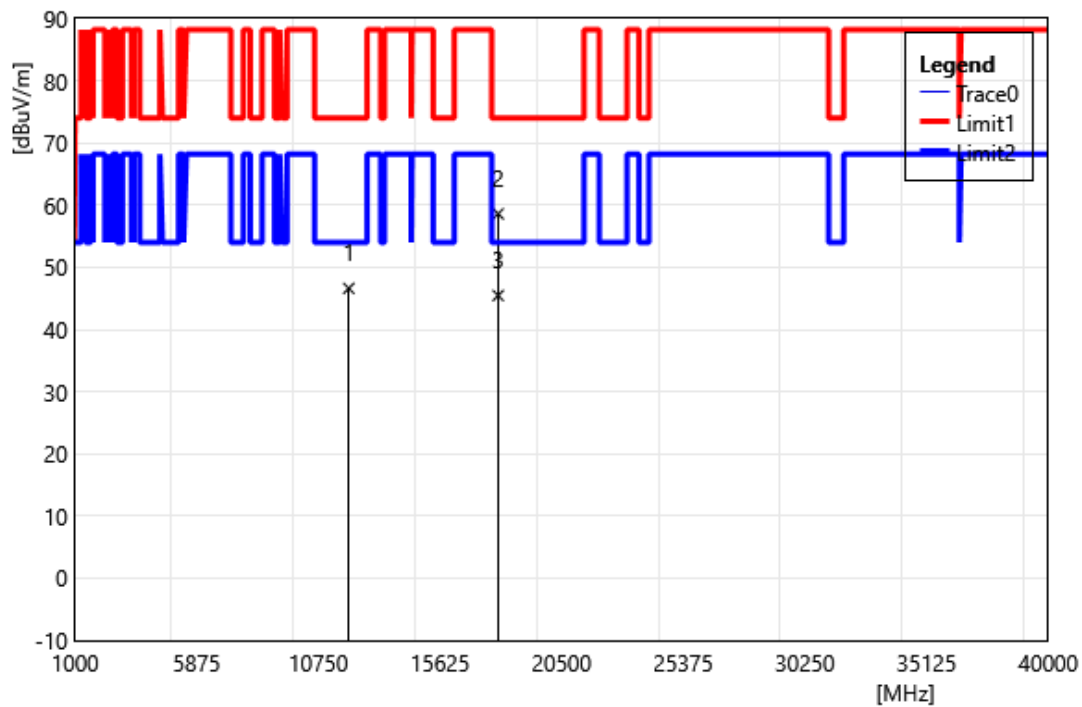


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	34.82	11.79	46.61	74.00	-27.39	PEAK
2	17955.00	33.07	25.54	58.61	74.00	-15.39	PEAK
3	17955.00	19.92	25.54	45.46	54.00	-8.54	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6145		
	MHz		
Polarization:	Vertical		
Remark:			

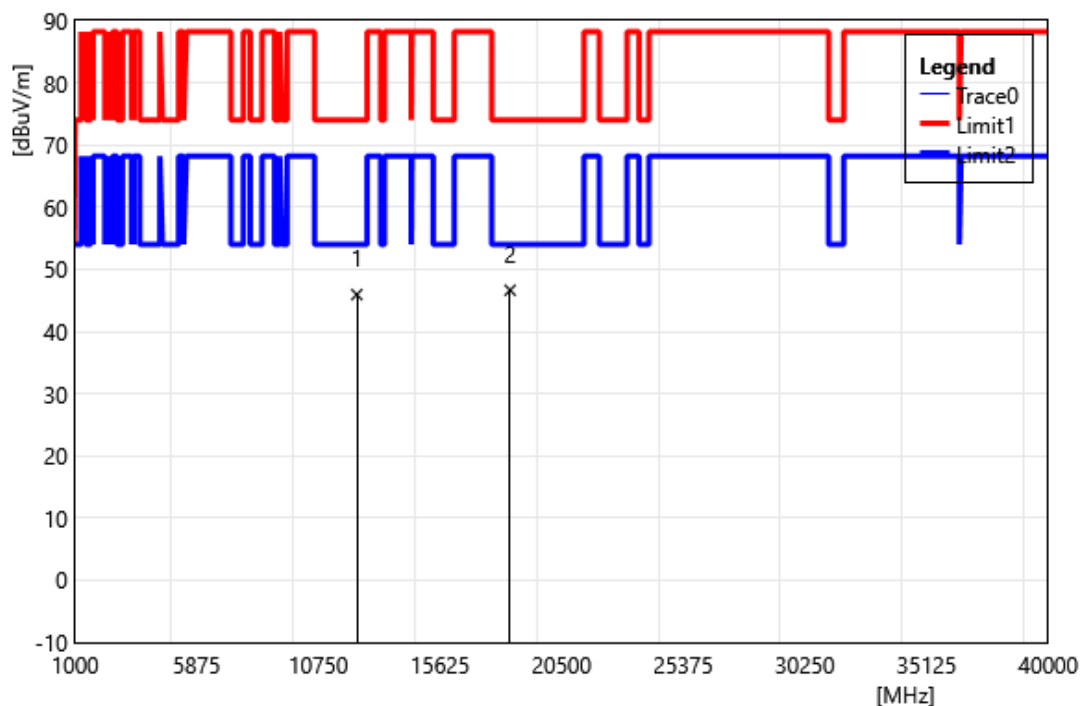


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	34.10	11.84	45.94	74.00	-28.06	PEAK
2	18435.00	31.39	15.26	46.65	74.00	-27.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6145		
	MHz		
Polarization:	Horizontal		
Remark:			

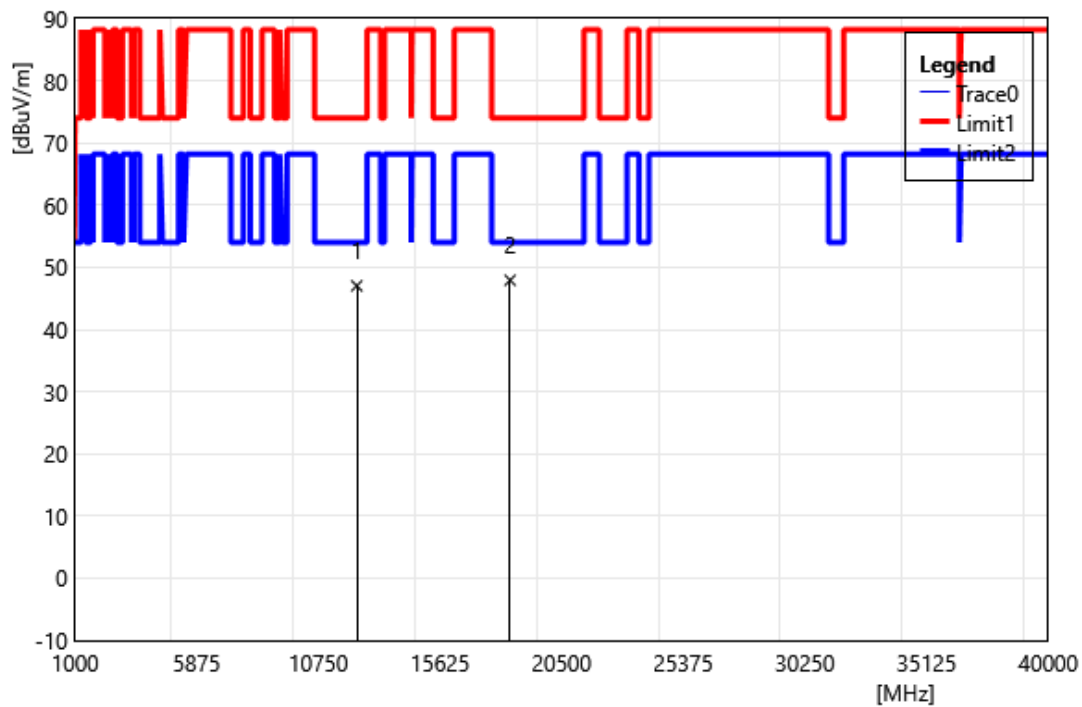


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	35.19	11.84	47.04	74.00	-26.97	PEAK
2	18435.00	32.66	15.26	47.92	74.00	-26.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6385		
	MHz		
Polarization:	Vertical		
Remark:			

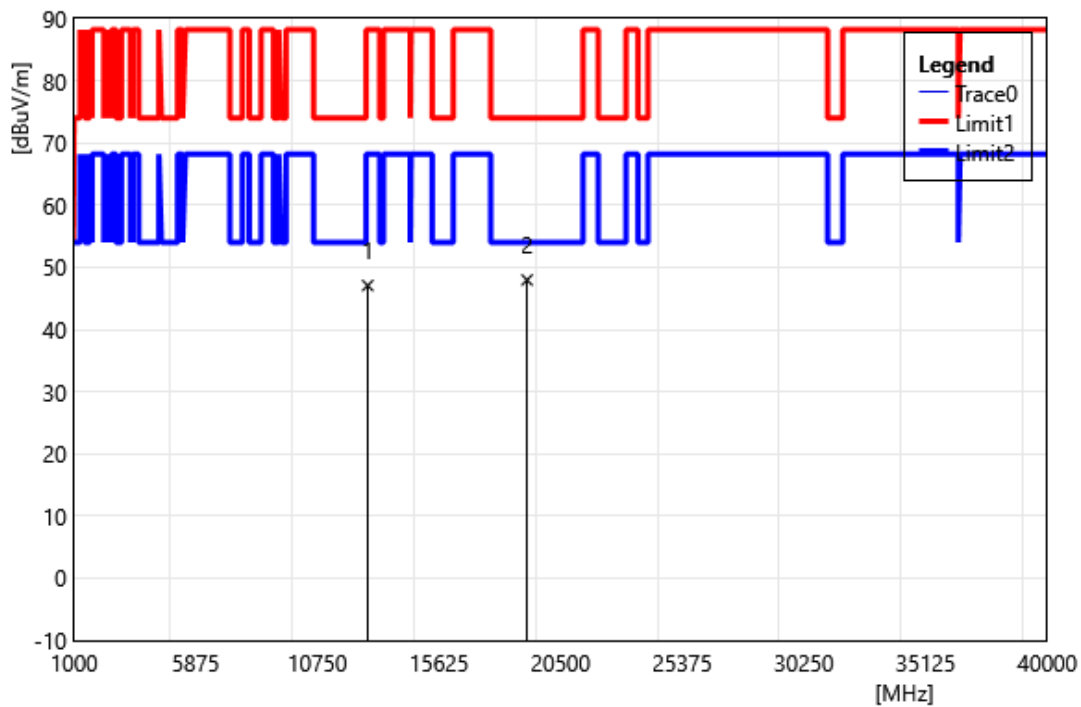


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	34.49	12.59	47.08	88.20	-41.12	PEAK
2	19155.00	32.10	15.87	47.97	74.00	-26.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6385		
	MHz		
Polarization:	Horizontal		
Remark:			

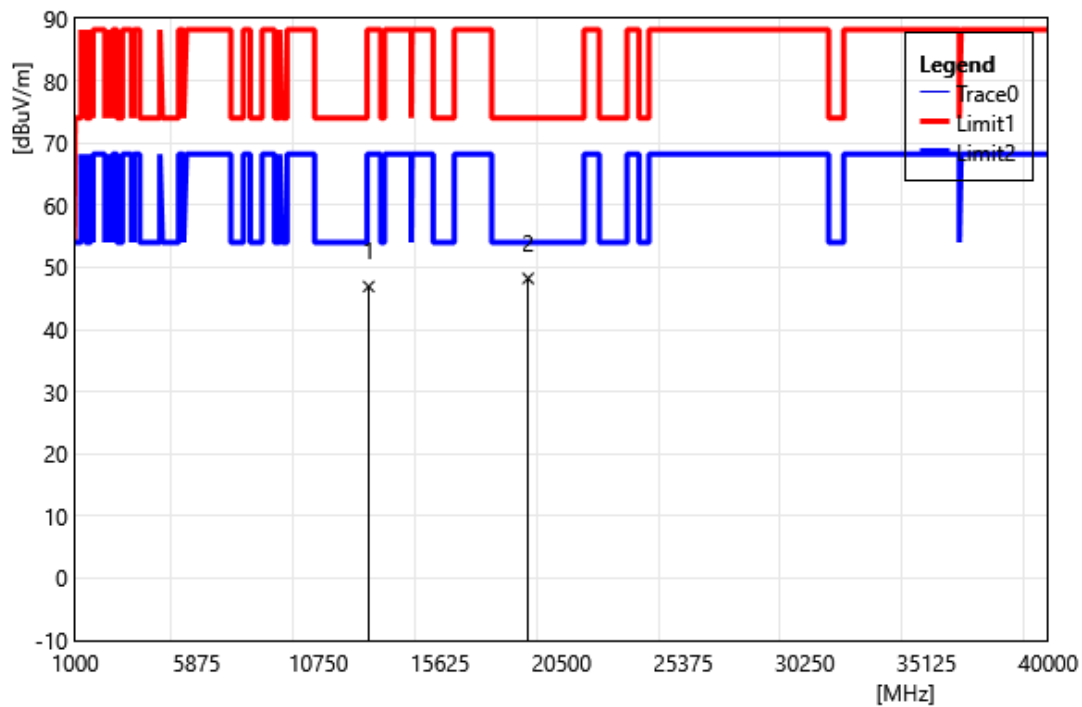


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	34.33	12.59	46.92	88.20	-41.28	PEAK
2	19155.00	32.35	15.87	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6465		
	MHz		
Polarization:	Vertical		
Remark:			

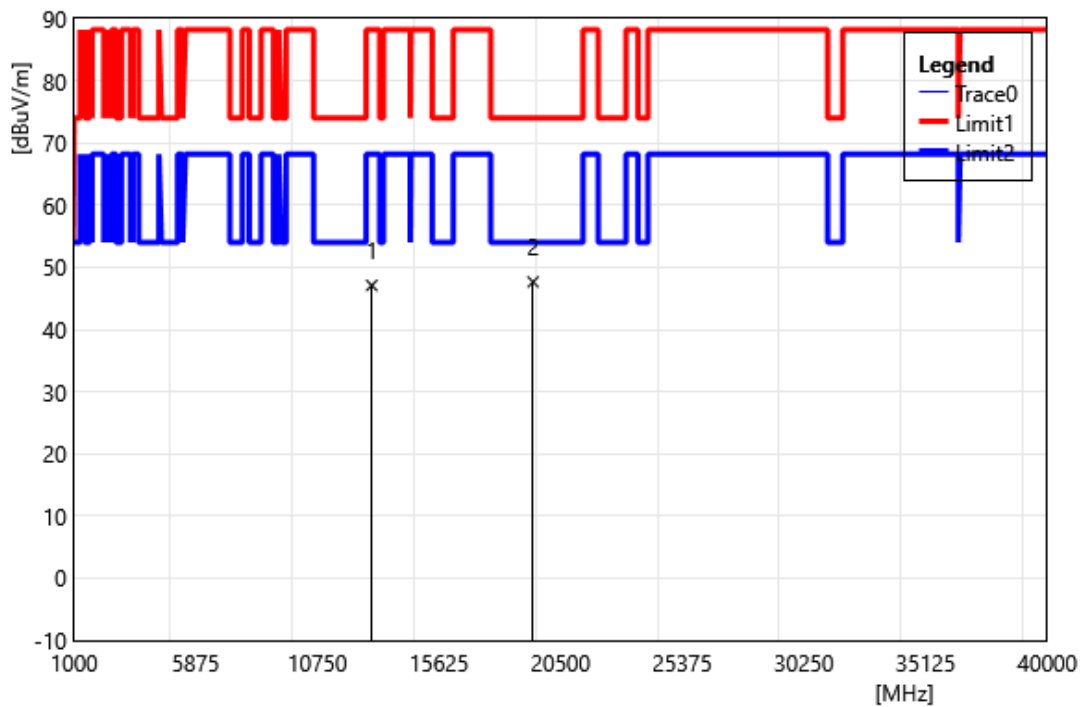


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	34.19	12.90	47.09	88.20	-41.11	PEAK
2	19395.00	31.34	16.32	47.66	74.00	-26.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6465		
	MHz		
Polarization:	Horizontal		
Remark:			

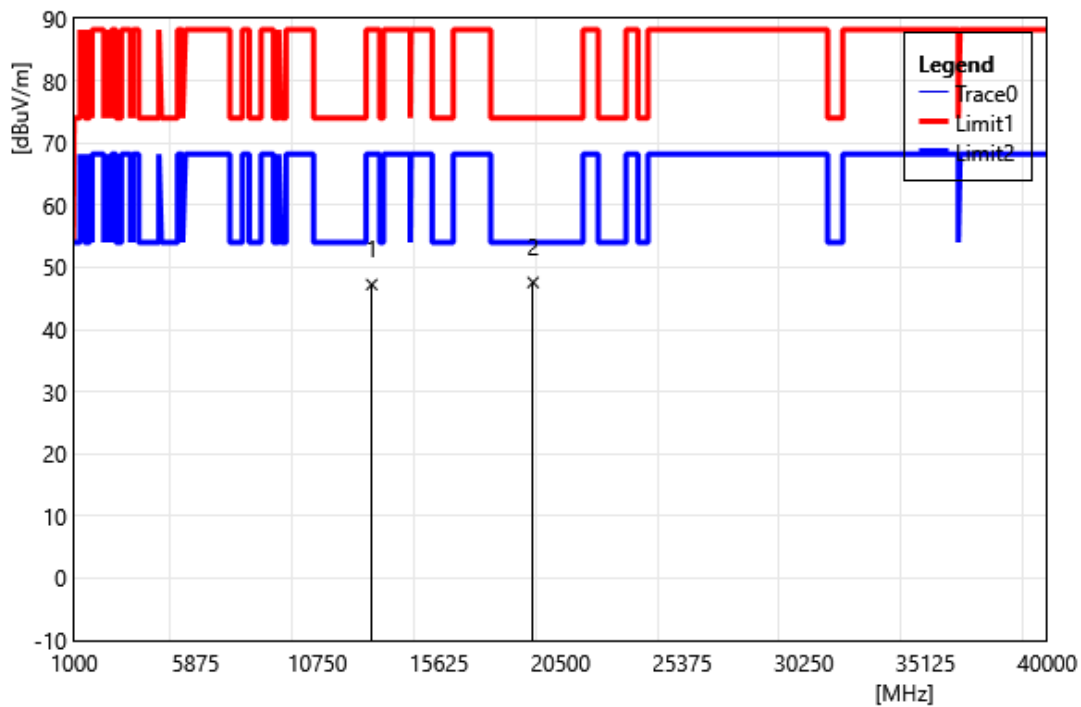


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	34.34	12.90	47.24	88.20	-40.96	PEAK
2	19395.00	31.24	16.32	47.56	74.00	-26.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6545		
	MHz		
Polarization:	Vertical		
Remark:			

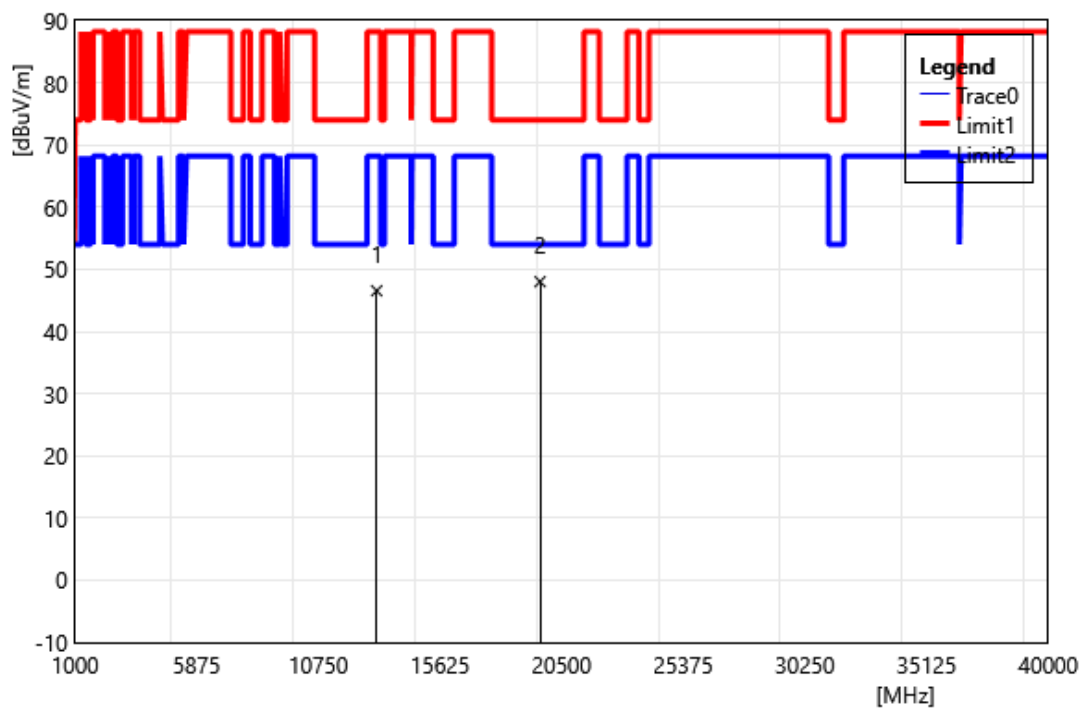


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	33.61	12.95	46.56	88.20	-41.64	PEAK
2	19635.00	32.04	15.98	48.02	74.00	-25.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6545		
	MHz		
Polarization:	Horizontal		
Remark:			

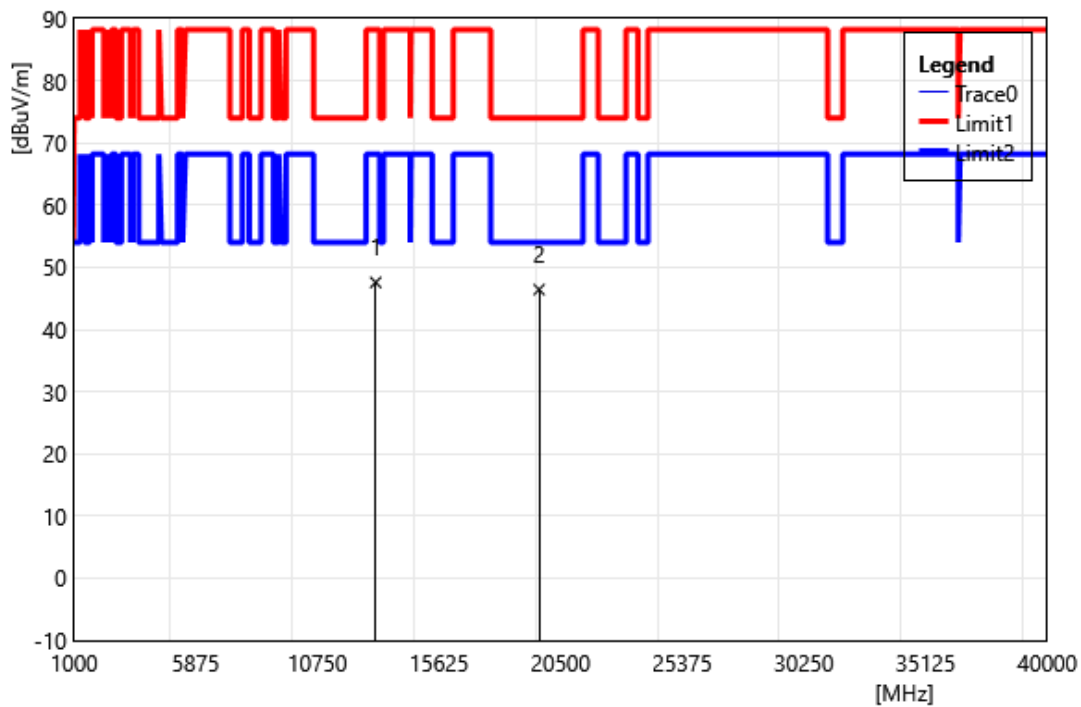


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	34.62	12.95	47.58	88.20	-40.63	PEAK
2	19635.00	30.45	15.98	46.43	74.00	-27.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6625		
	MHz		
Polarization:	Vertical		
Remark:			

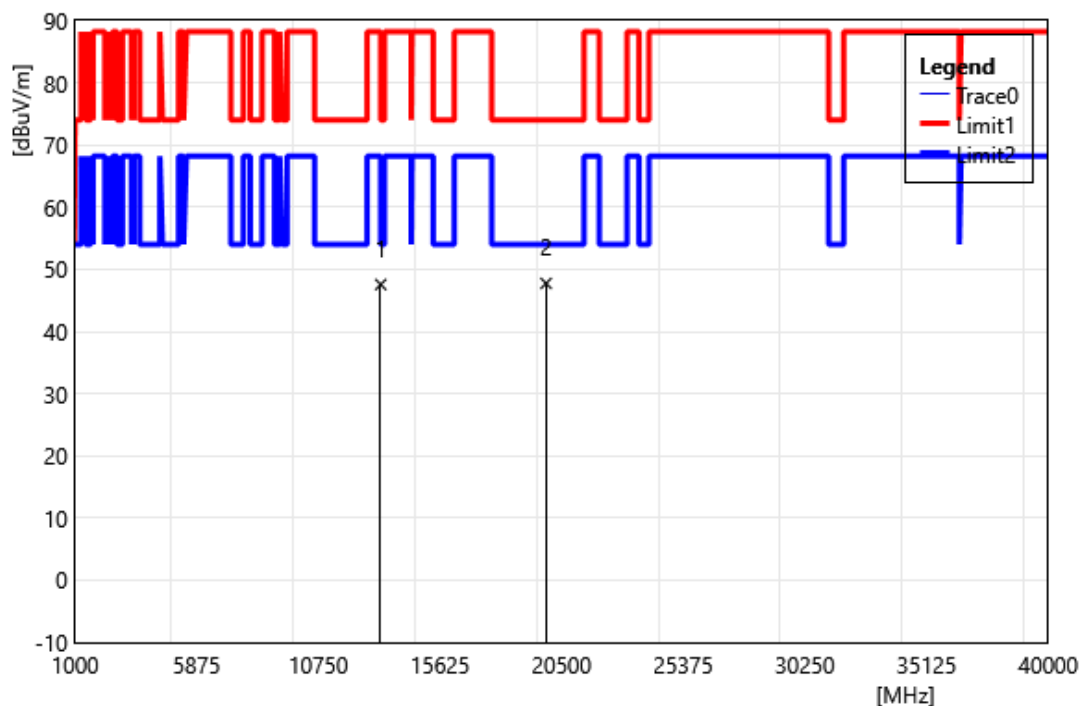


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	34.32	13.24	47.56	74.00	-26.44	PEAK
2	19875.00	31.40	16.35	47.75	74.00	-26.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6625		
	MHz		
Polarization:	Horizontal		
Remark:			

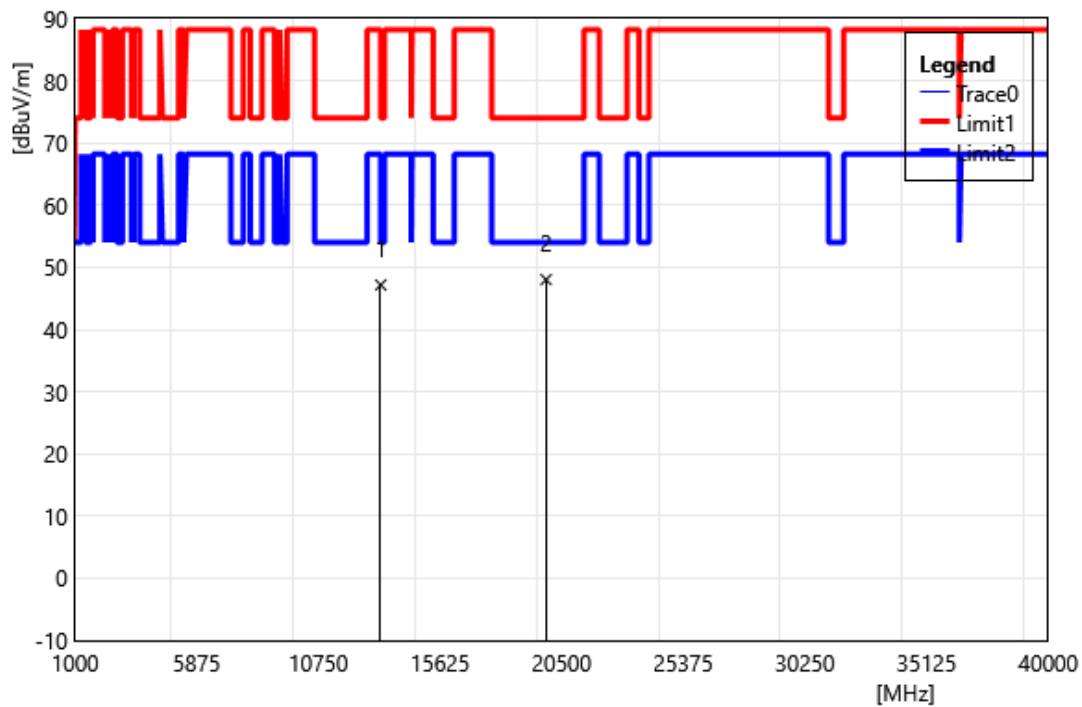


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	33.93	13.24	47.17	74.00	-26.83	PEAK
2	19875.00	31.69	16.35	48.04	74.00	-25.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6705		
	MHz		
Polarization:	Vertical		
Remark:			

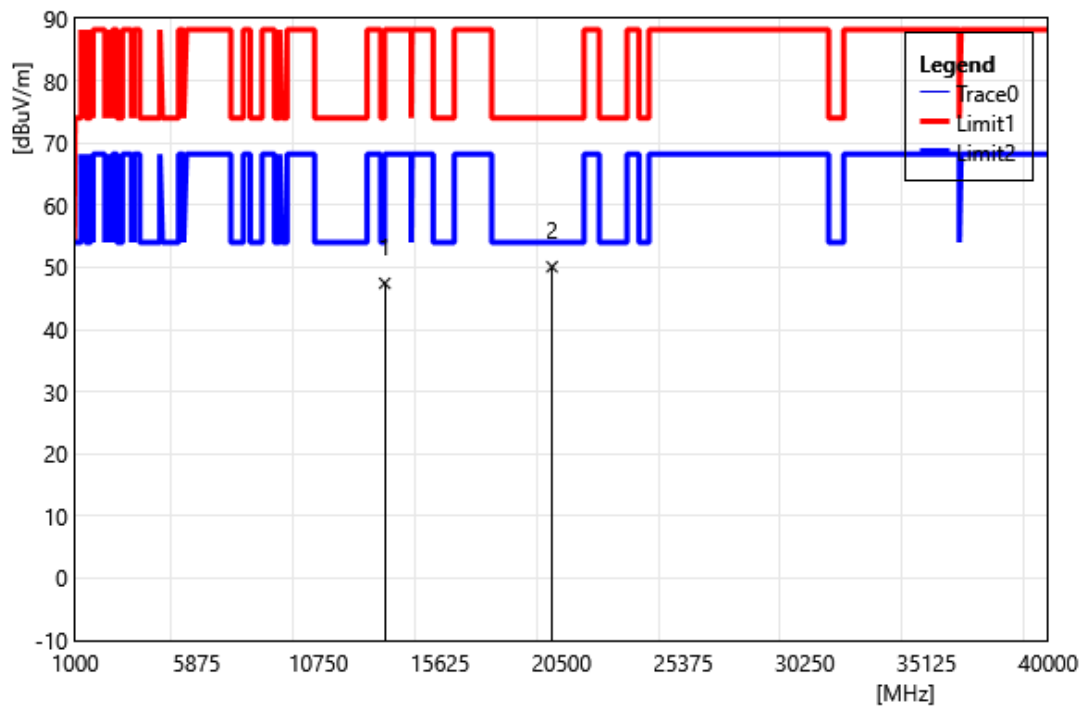


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	33.56	13.88	47.44	88.20	-40.76	PEAK
2	20115.00	33.81	16.27	50.08	74.00	-23.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6705		
	MHz		
Polarization:	Horizontal		
Remark:			

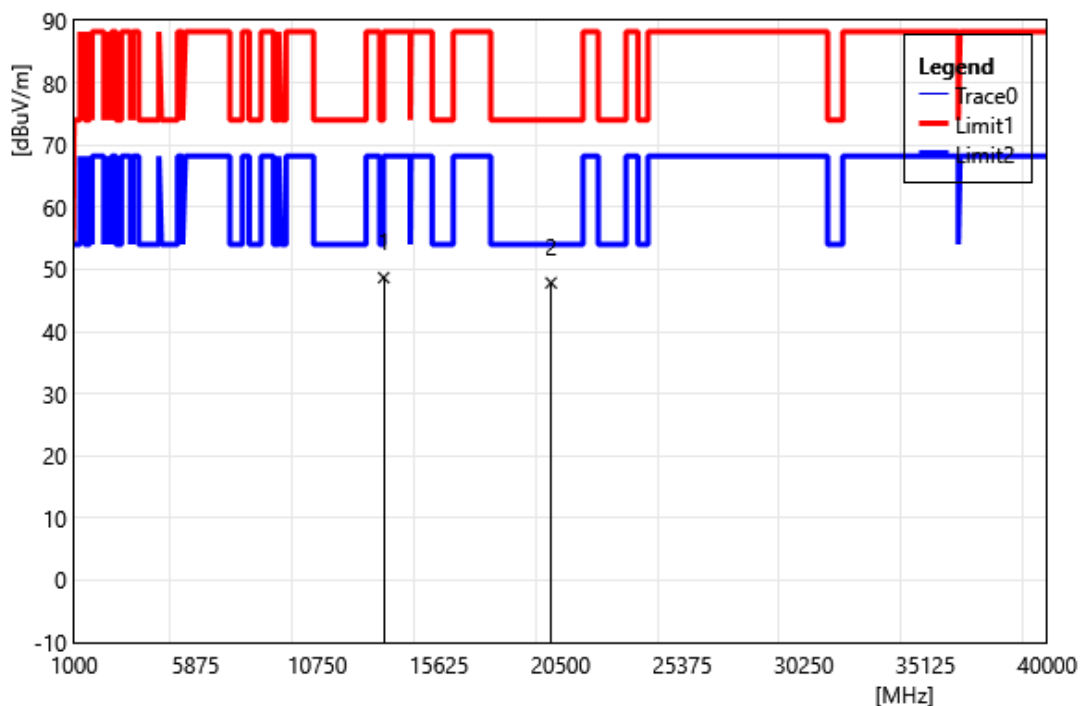


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	34.79	13.88	48.67	88.20	-39.53	PEAK
2	20115.00	31.56	16.27	47.83	74.00	-26.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6785		
	MHz		
Polarization:	Vertical		
Remark:			

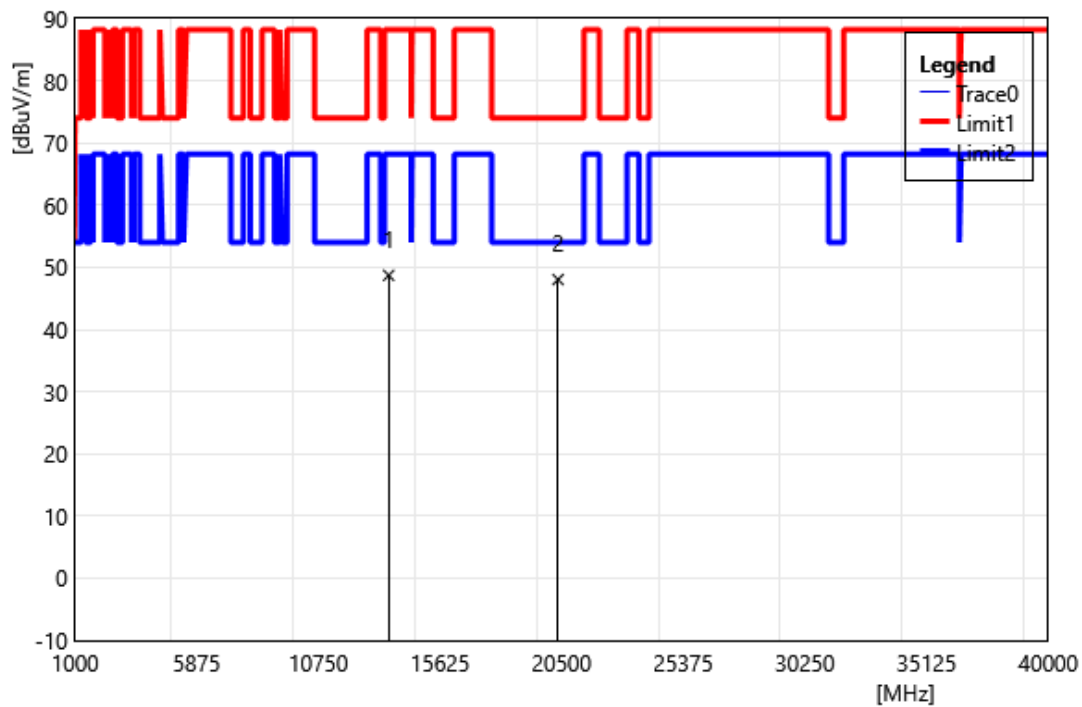


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	34.33	14.39	48.72	88.20	-39.48	PEAK
2	20355.00	31.45	16.59	48.04	74.00	-25.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6785		
	MHz		
Polarization:	Horizontal		
Remark:			

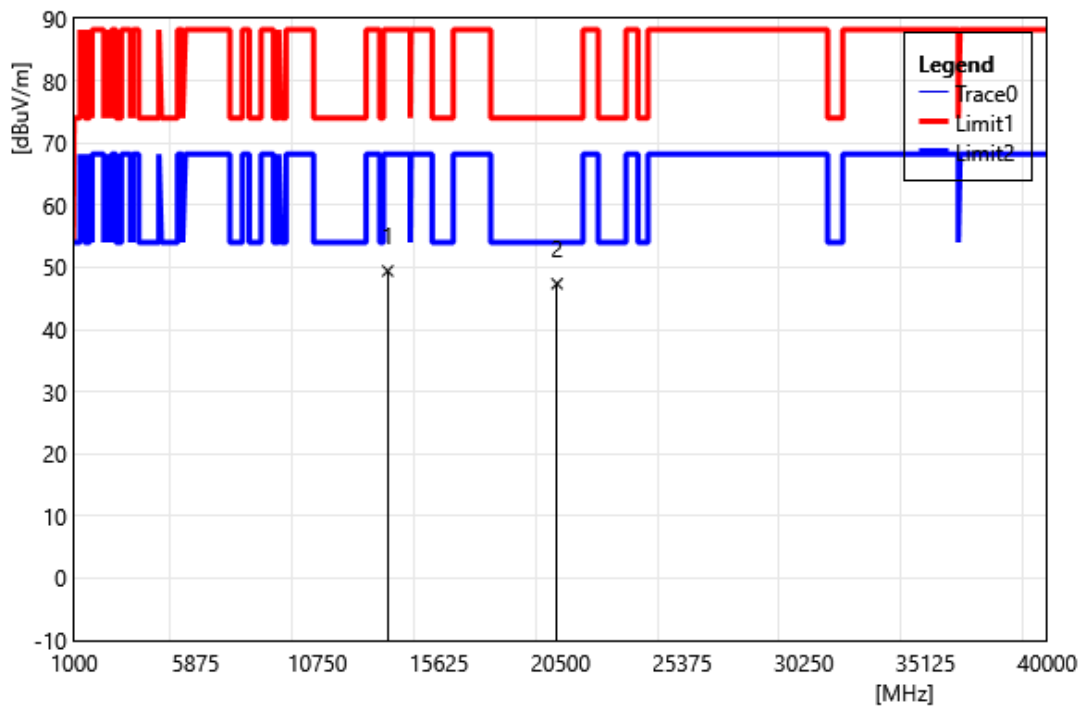


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	35.03	14.39	49.42	88.20	-38.78	PEAK
2	20355.00	30.77	16.59	47.36	74.00	-26.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6865		
	MHz		
Polarization:	Vertical		
Remark:			

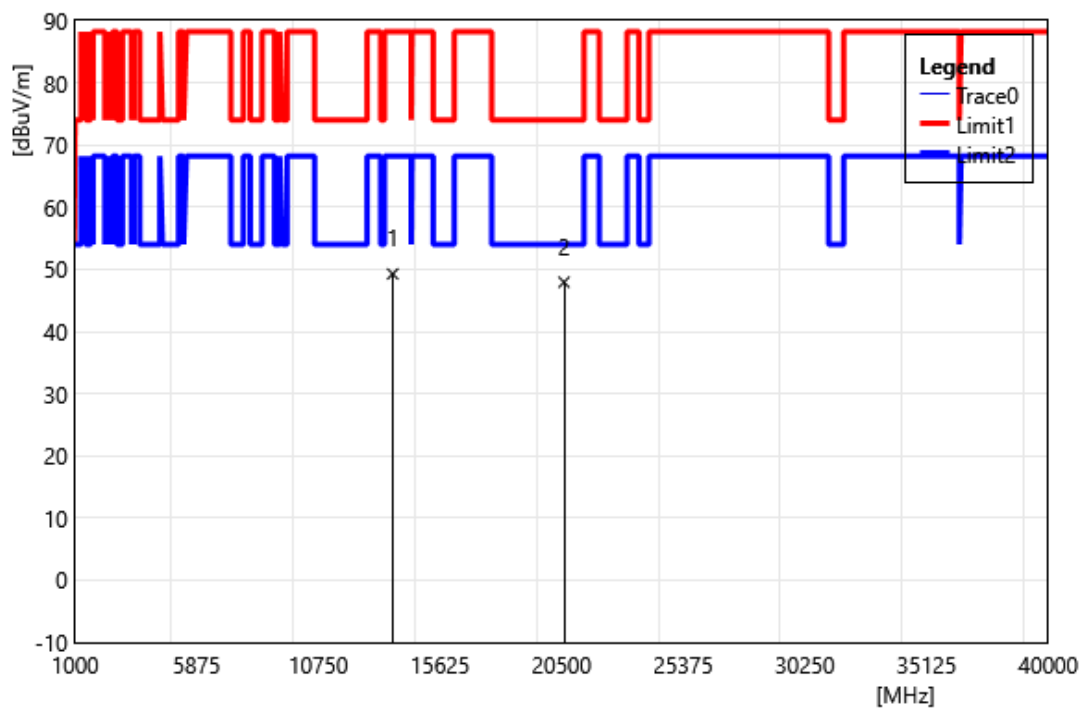


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	34.76	14.50	49.26	88.20	-38.94	PEAK
2	20595.00	31.31	16.63	47.94	74.00	-26.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6865		
	MHz		
Polarization:	Horizontal		
Remark:			

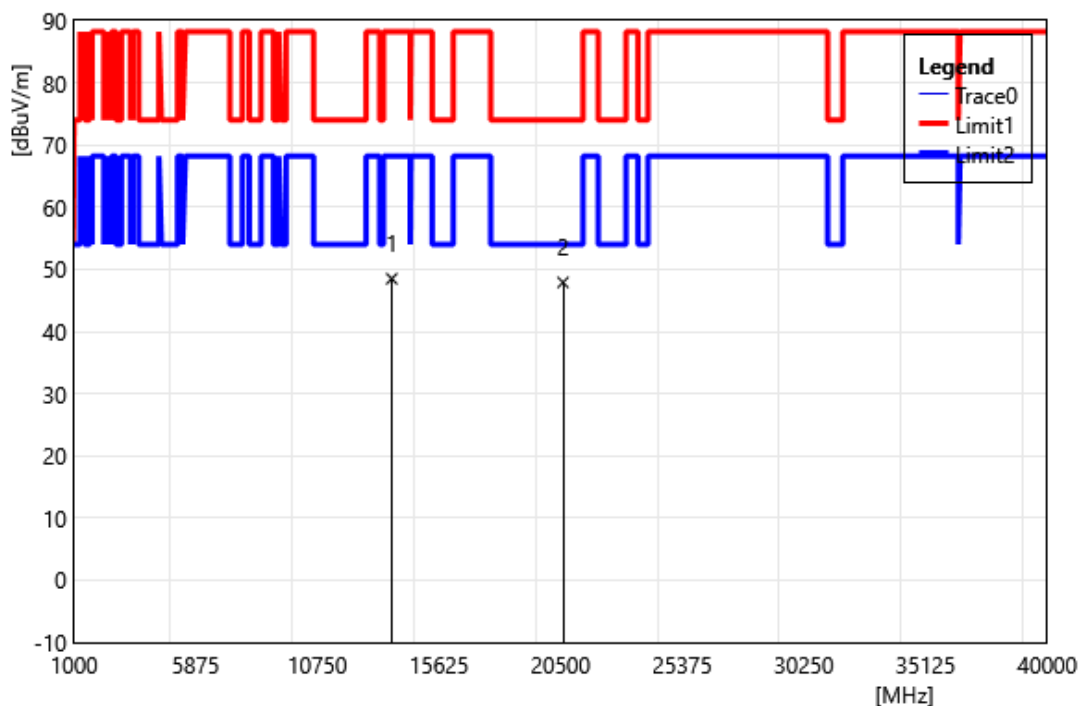


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	33.99	14.50	48.49	88.20	-39.71	PEAK
2	20595.00	31.28	16.63	47.91	74.00	-26.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6945		
	MHz		
Polarization:	Vertical		
Remark:			

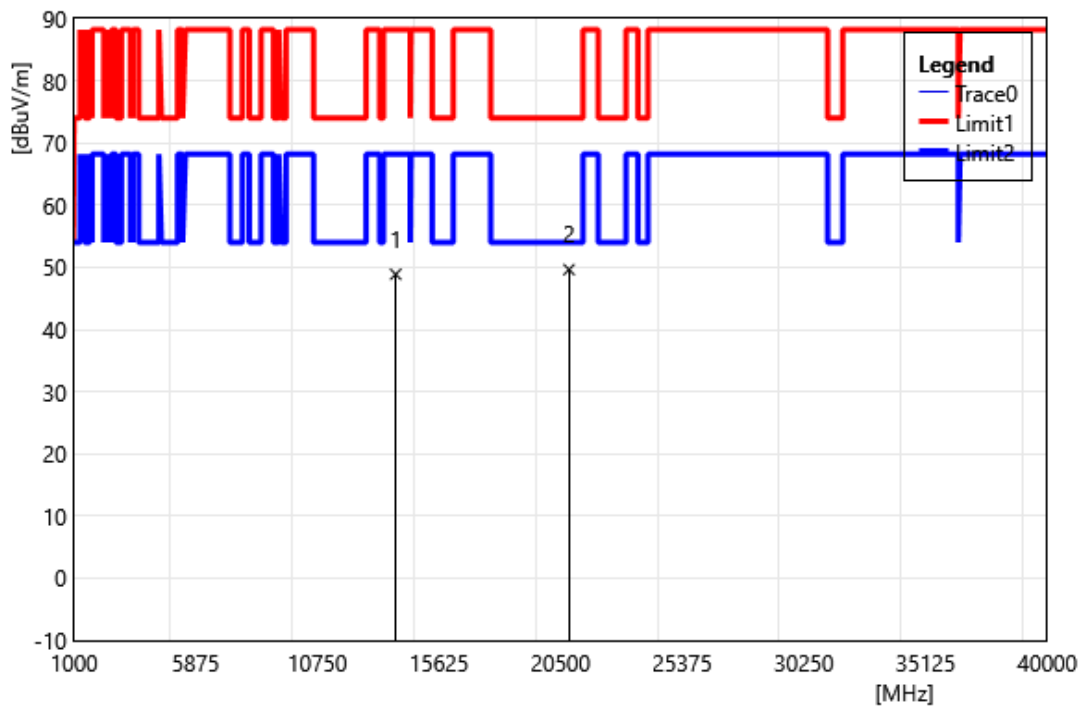


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	34.07	14.81	48.88	88.20	-39.32	PEAK
2	20835.00	32.70	16.93	49.63	74.00	-24.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6945		
	MHz		
Polarization:	Horizontal		
Remark:			

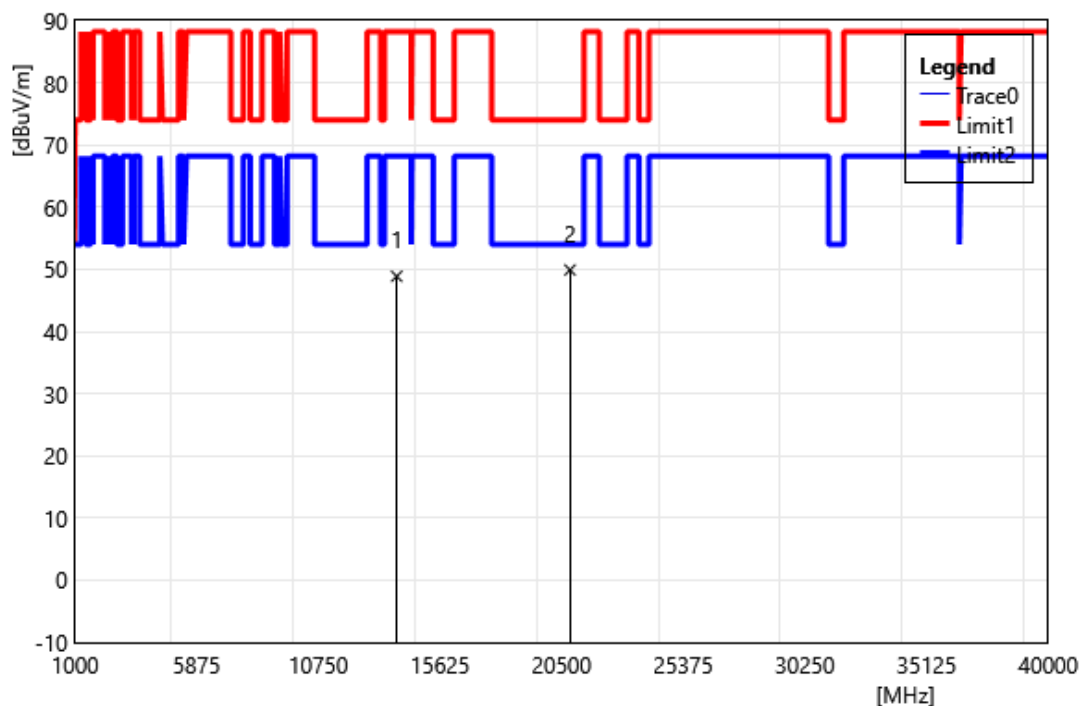


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	34.08	14.81	48.89	88.20	-39.31	PEAK
2	20835.00	32.99	16.93	49.92	74.00	-24.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

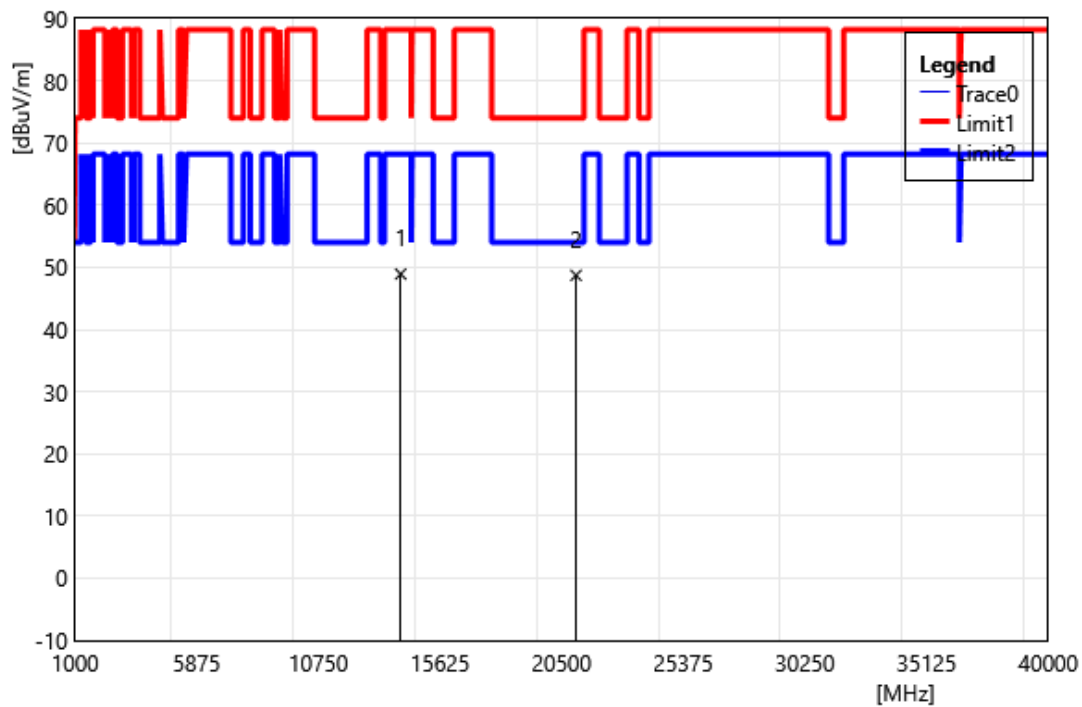


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	33.71	15.21	48.92	88.20	-39.28	PEAK
2	21075.00	32.55	16.18	48.73	74.00	-25.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

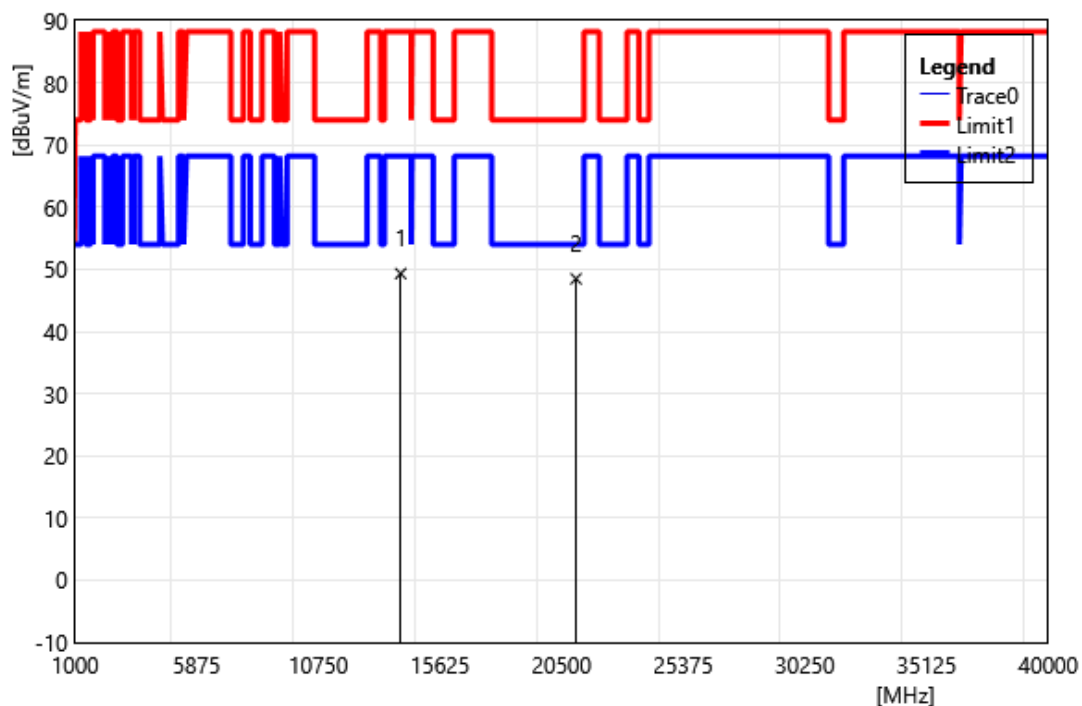


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	34.10	15.21	49.31	88.20	-38.89	PEAK
2	21075.00	32.29	16.18	48.47	74.00	-25.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

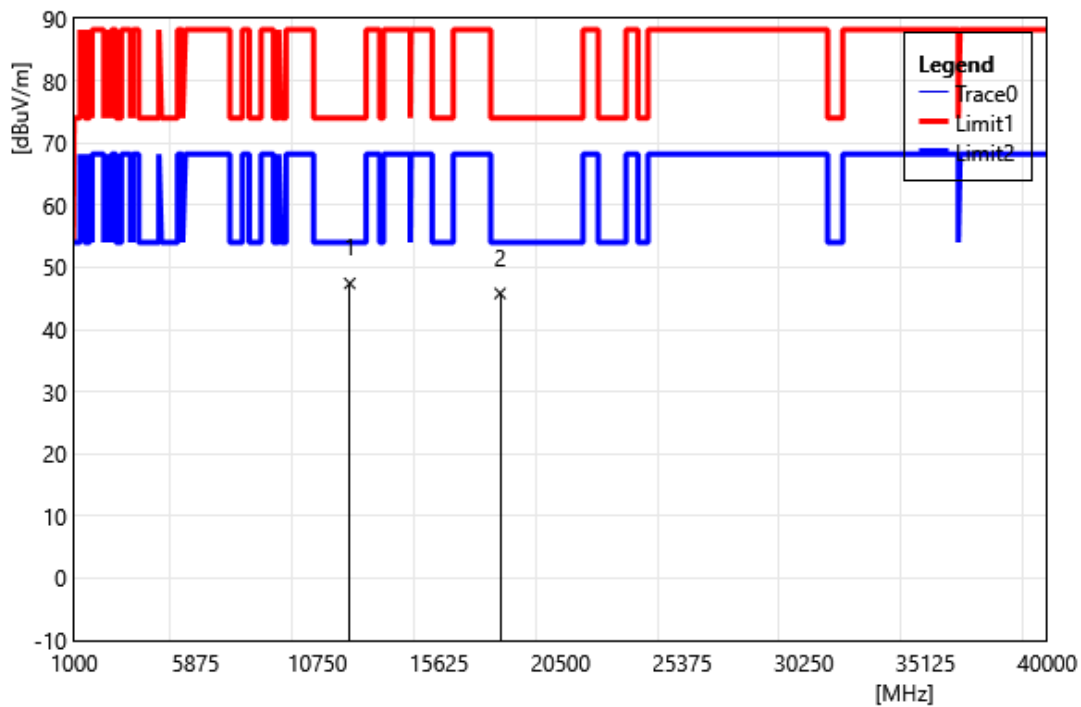


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.54	11.88	47.42	74.00	-26.58	PEAK
2	18075.00	31.54	14.27	45.81	74.00	-28.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

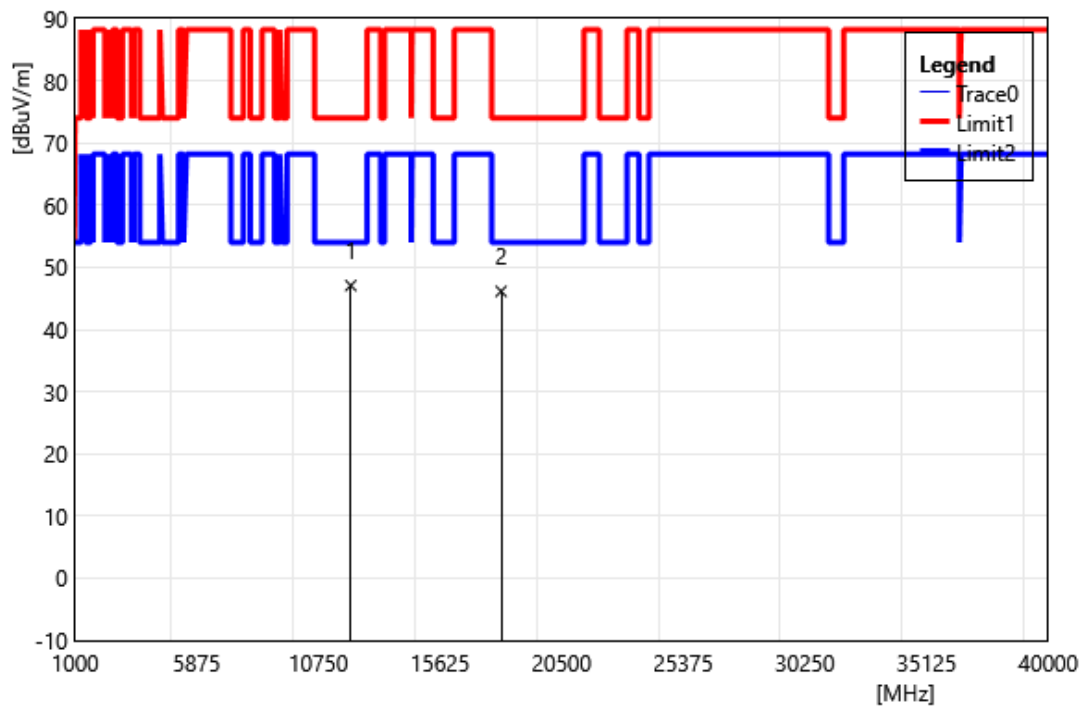


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.19	11.88	47.07	74.00	-26.93	PEAK
2	18075.00	31.87	14.27	46.14	74.00	-27.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Vertical		
Remark:			

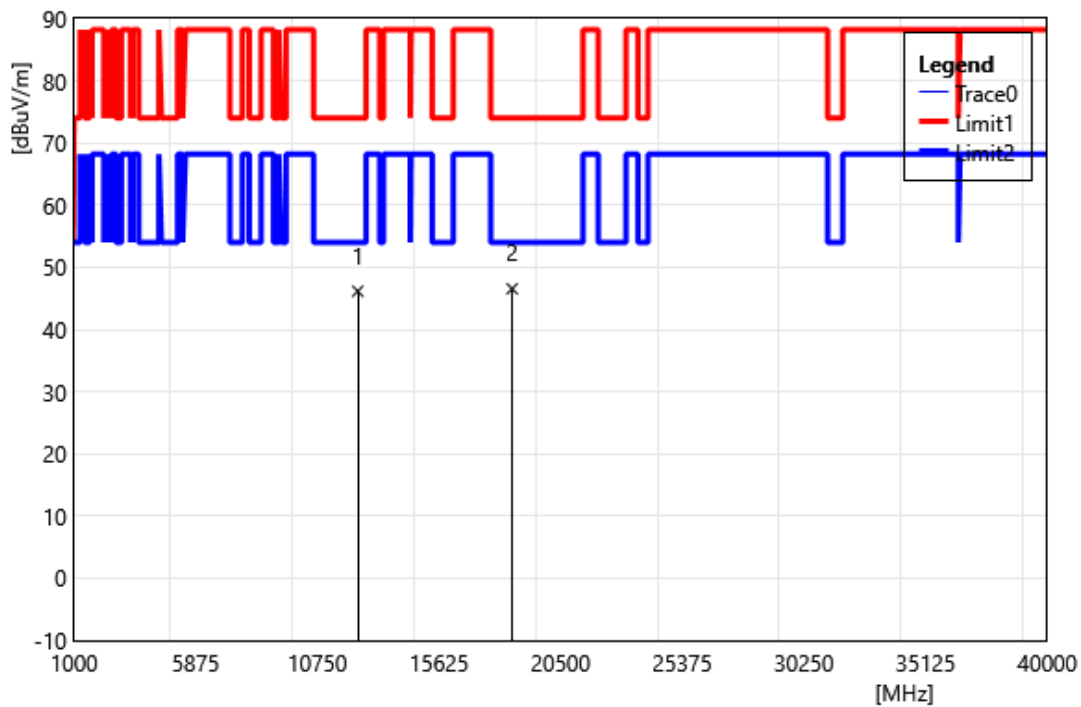


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	34.50	11.66	46.16	74.00	-27.84	PEAK
2	18555.00	31.57	14.97	46.54	74.00	-27.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Horizontal		
Remark:			

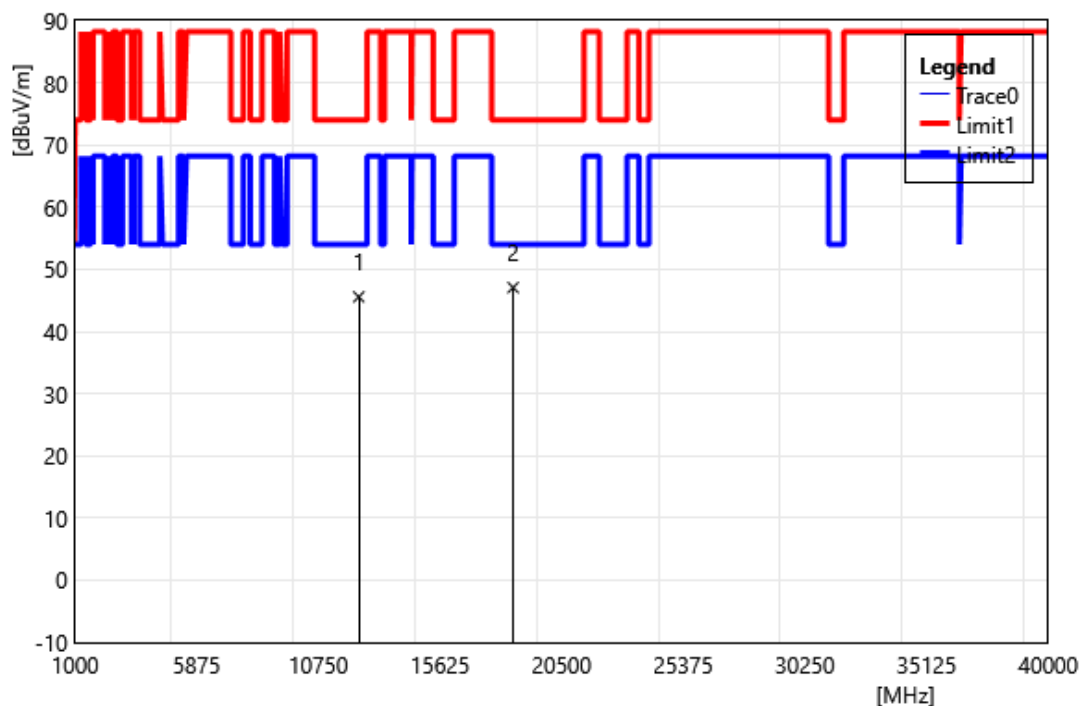


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	33.92	11.66	45.58	74.00	-28.42	PEAK
2	18555.00	32.10	14.97	47.07	74.00	-26.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Vertical		
Remark:			

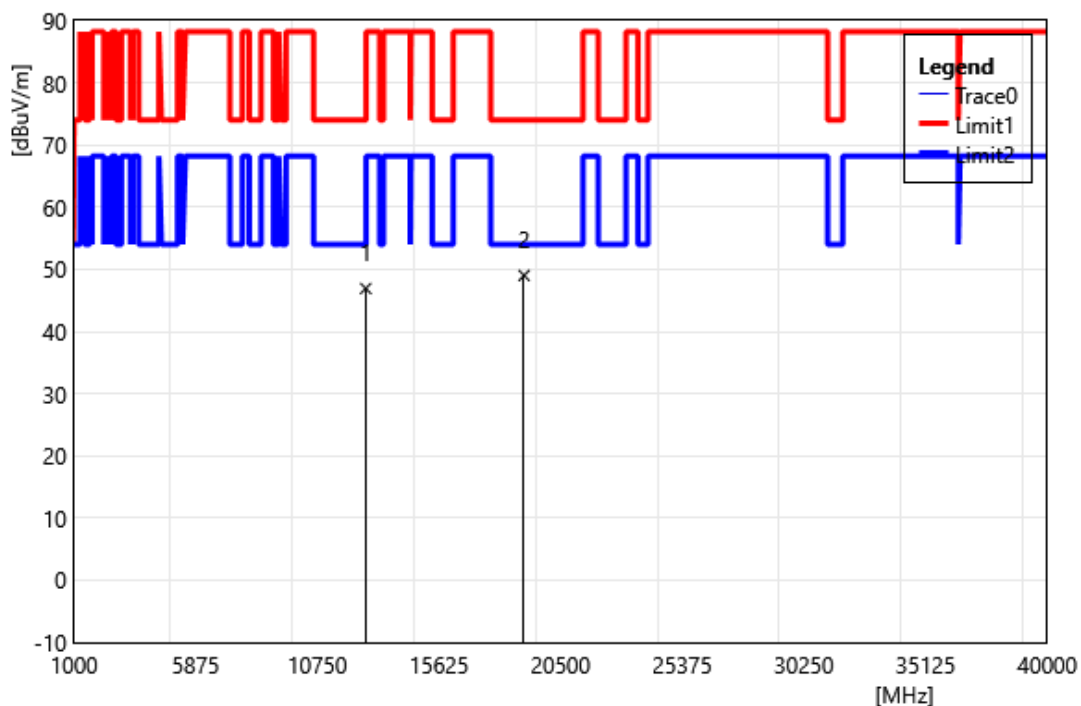


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.71	12.21	46.92	74.00	-27.08	PEAK
2	19035.00	33.38	15.64	49.02	74.00	-24.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Horizontal		
Remark:			

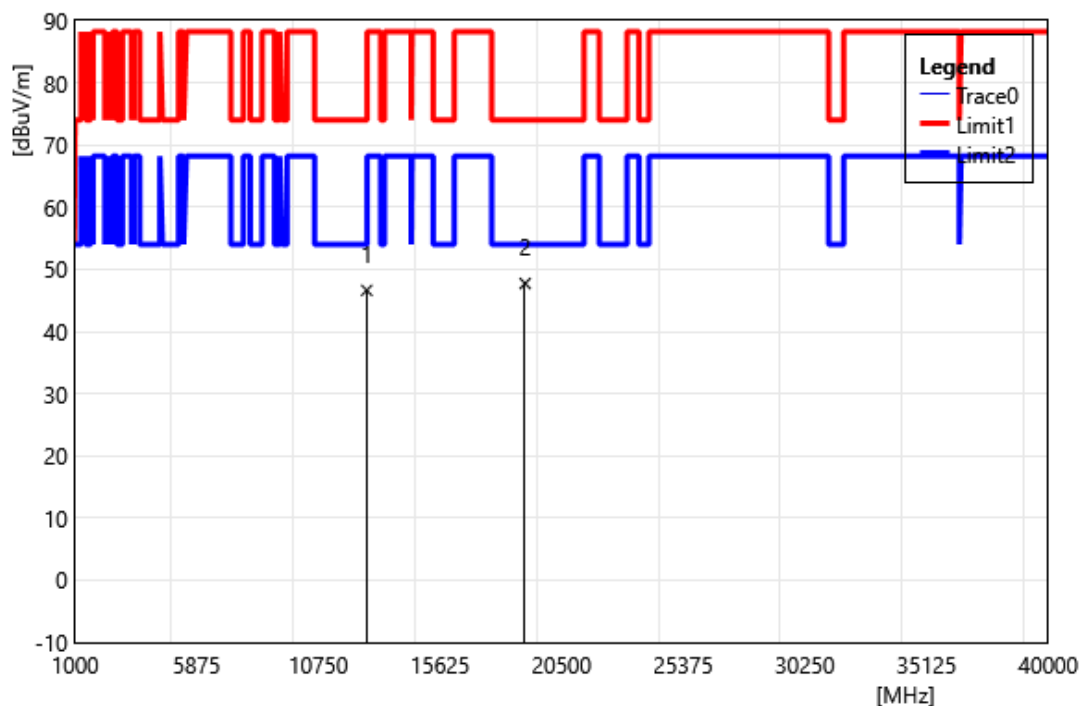


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.41	12.21	46.62	74.00	-27.38	PEAK
2	19035.00	32.09	15.64	47.73	74.00	-26.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Vertical		
Remark:			

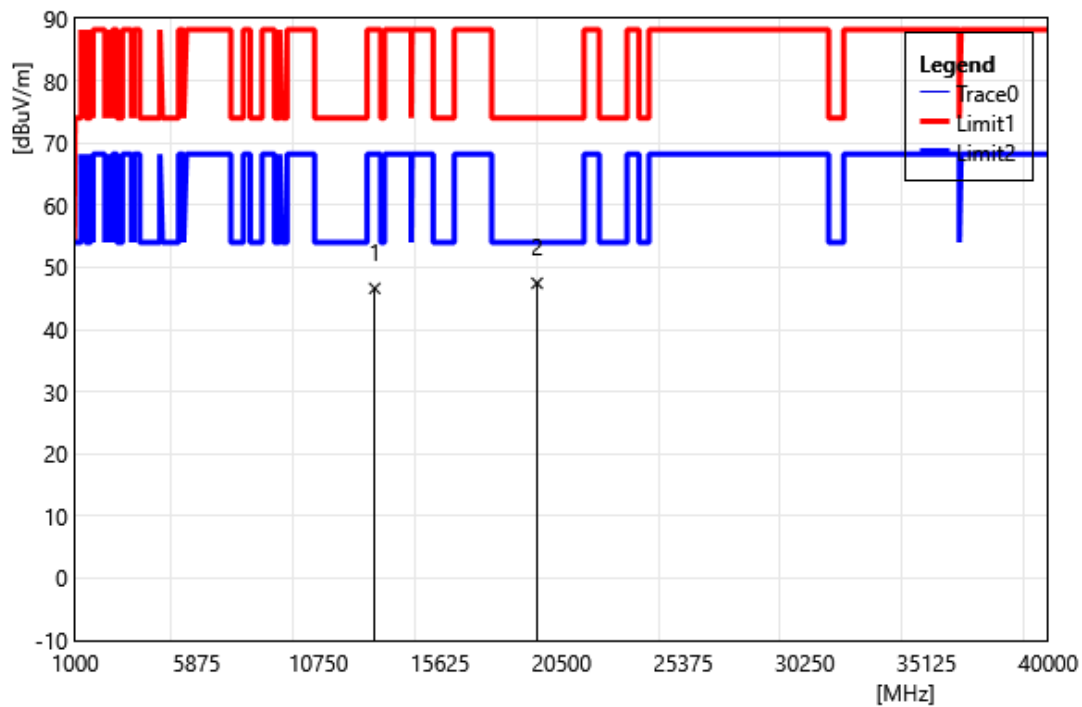


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	33.58	13.03	46.61	88.20	-41.59	PEAK
2	19515.00	31.65	15.80	47.45	74.00	-26.55	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Horizontal		
Remark:			

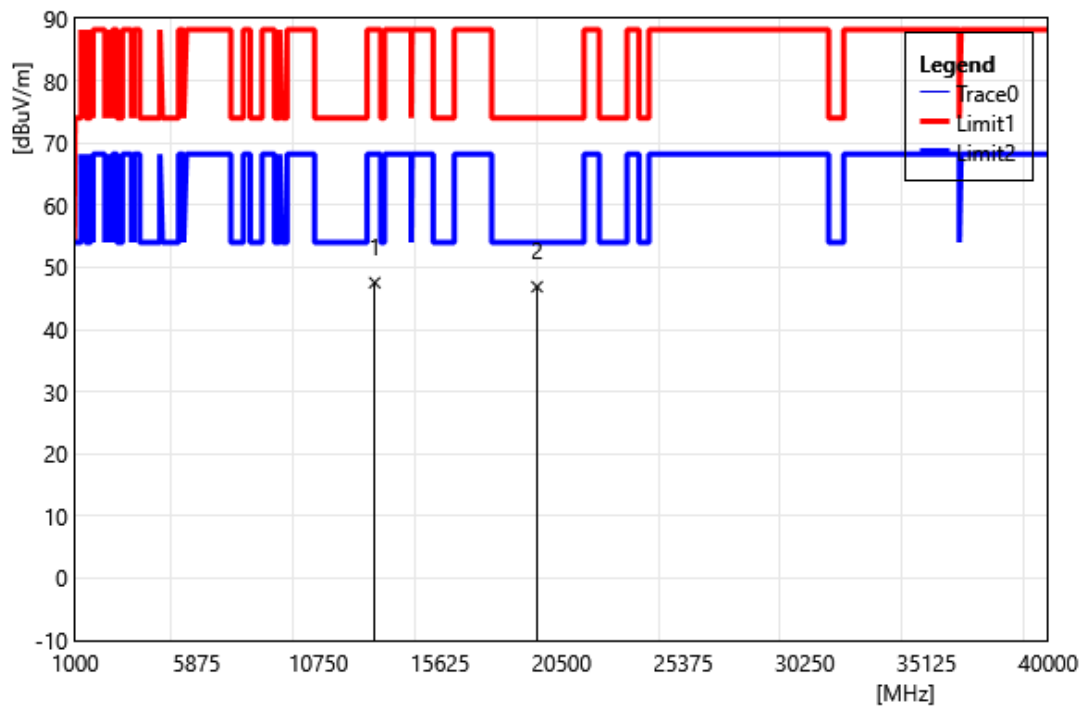


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	34.51	13.03	47.54	88.20	-40.66	PEAK
2	19515.00	31.08	15.80	46.88	74.00	-27.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Vertical		
Remark:			

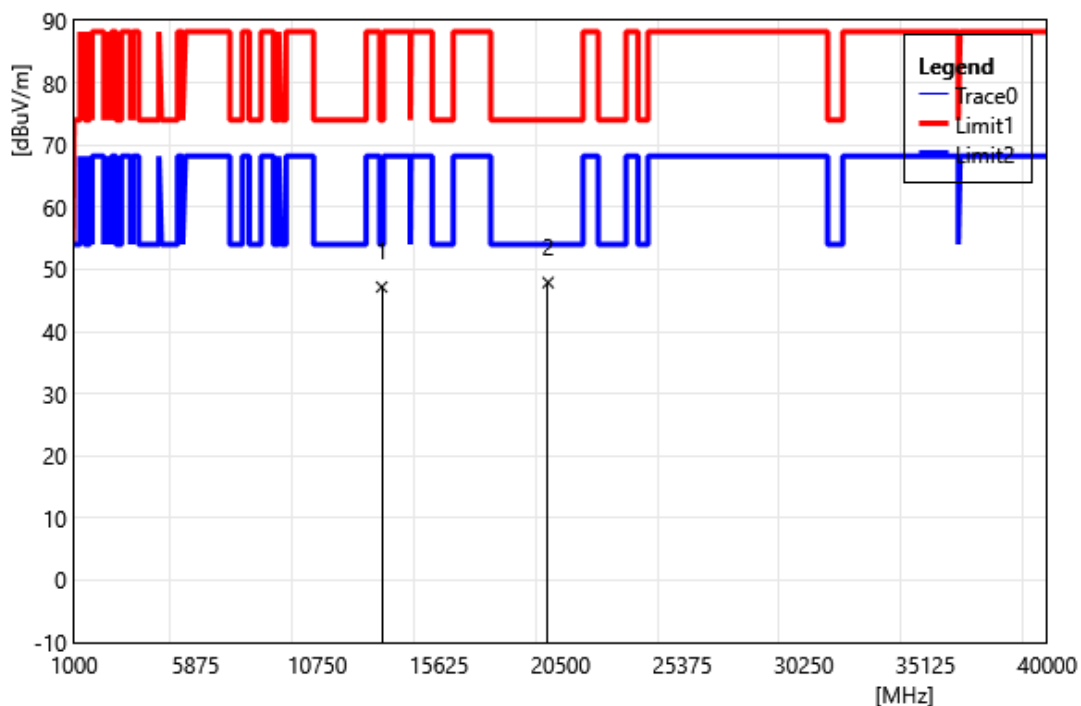


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	33.68	13.48	47.16	74.00	-26.84	PEAK
2	19995.00	31.35	16.53	47.88	74.00	-26.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Horizontal		
Remark:			

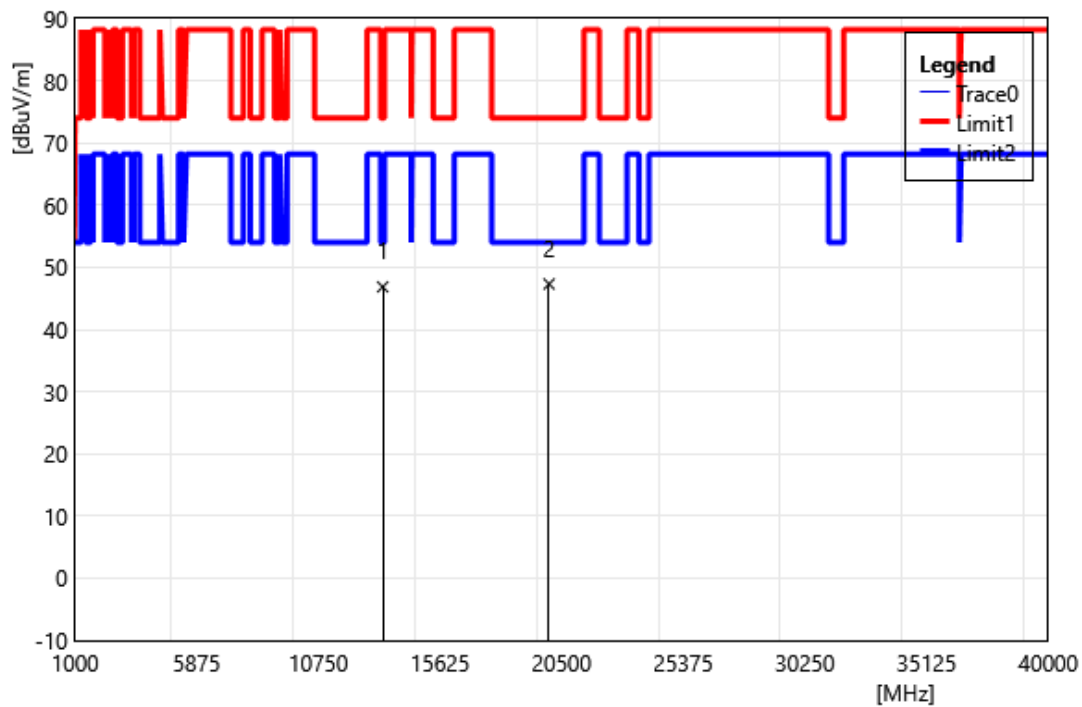


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	33.39	13.48	46.87	74.00	-27.13	PEAK
2	19995.00	30.79	16.53	47.32	74.00	-26.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825 MHz		
Polarization:	Vertical		
Remark:			

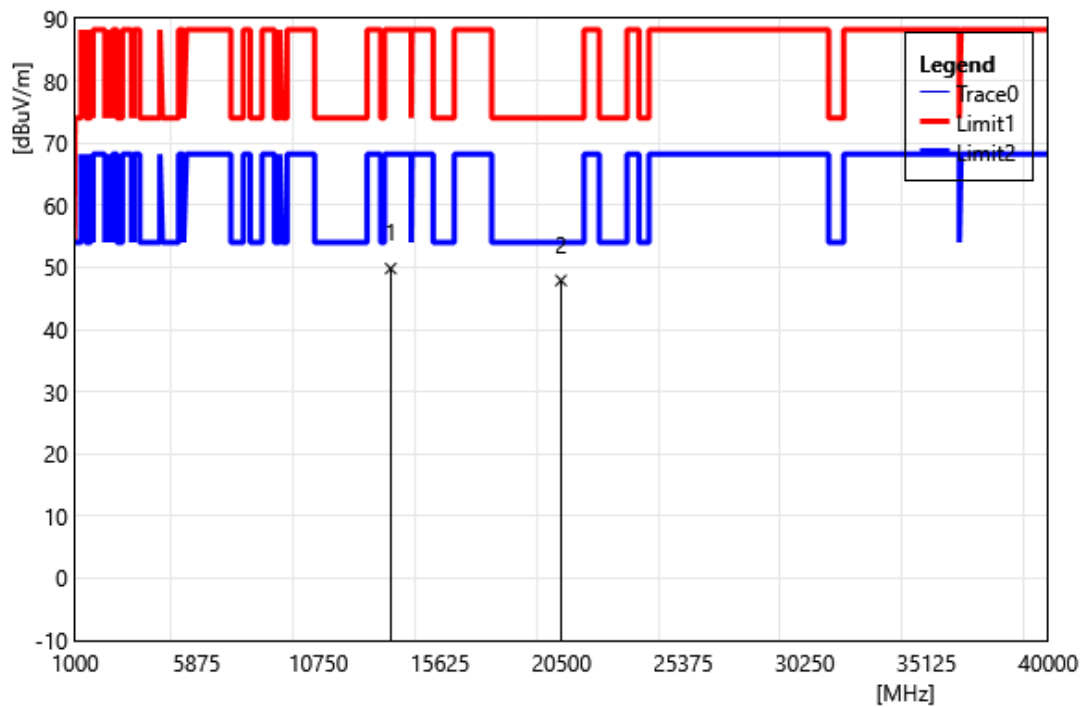


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	35.30	14.51	49.81	88.20	-38.39	PEAK
2	20475.00	31.13	16.76	47.89	74.00	-26.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825		
	MHz		
Polarization:	Horizontal		
Remark:			

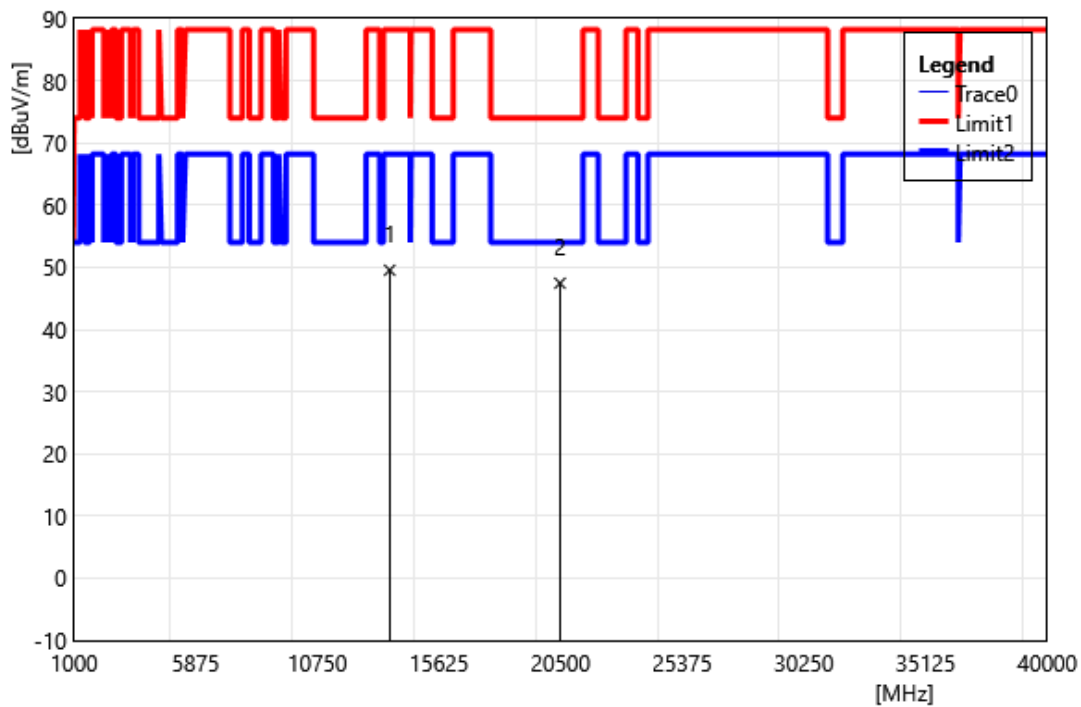


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	35.02	14.51	49.53	88.20	-38.67	PEAK
2	20475.00	30.70	16.76	47.46	74.00	-26.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

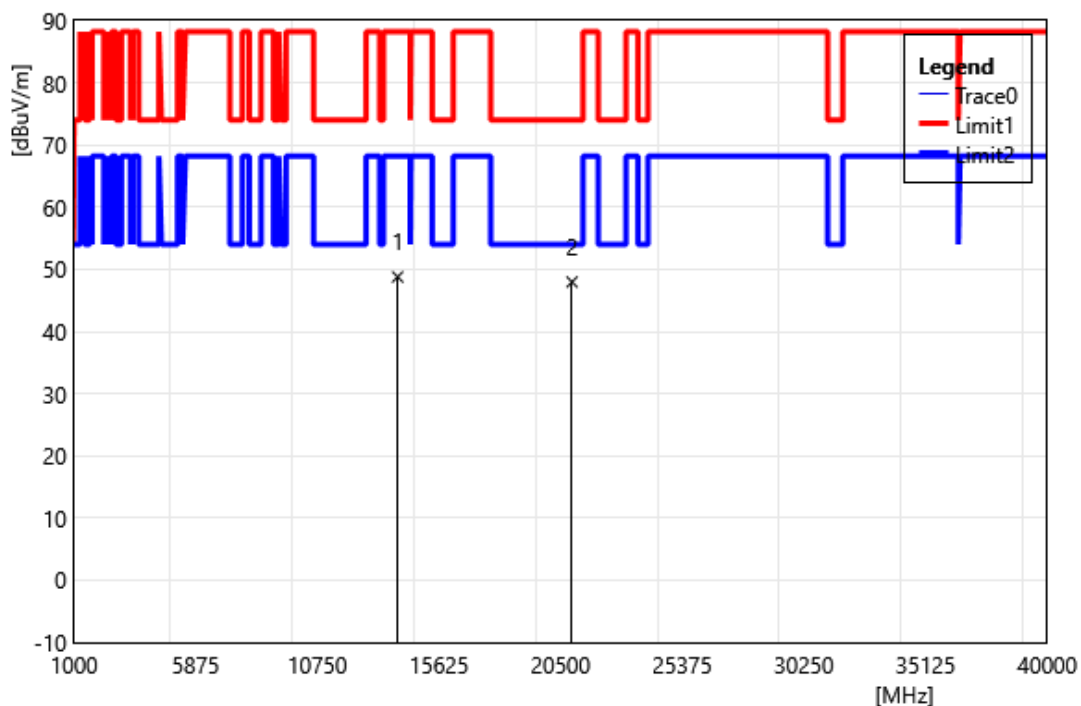


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	33.92	14.85	48.77	88.20	-39.43	PEAK
2	20955.00	30.89	17.08	47.97	74.00	-26.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

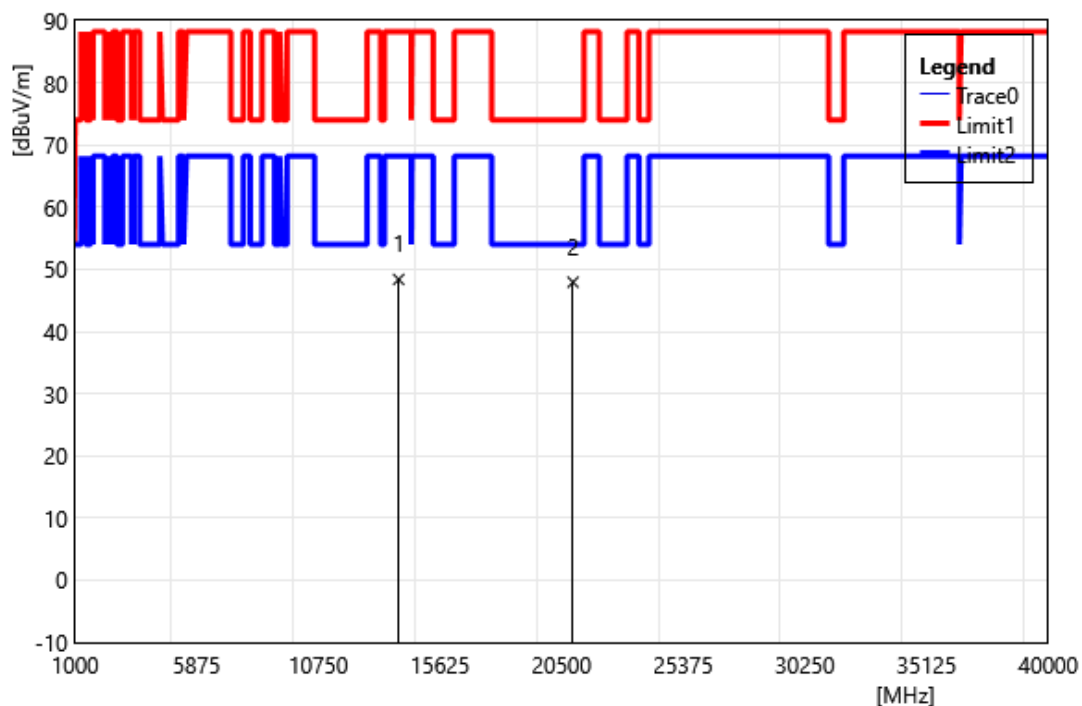


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	33.54	14.85	48.39	88.20	-39.81	PEAK
2	20955.00	30.86	17.08	47.94	74.00	-26.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

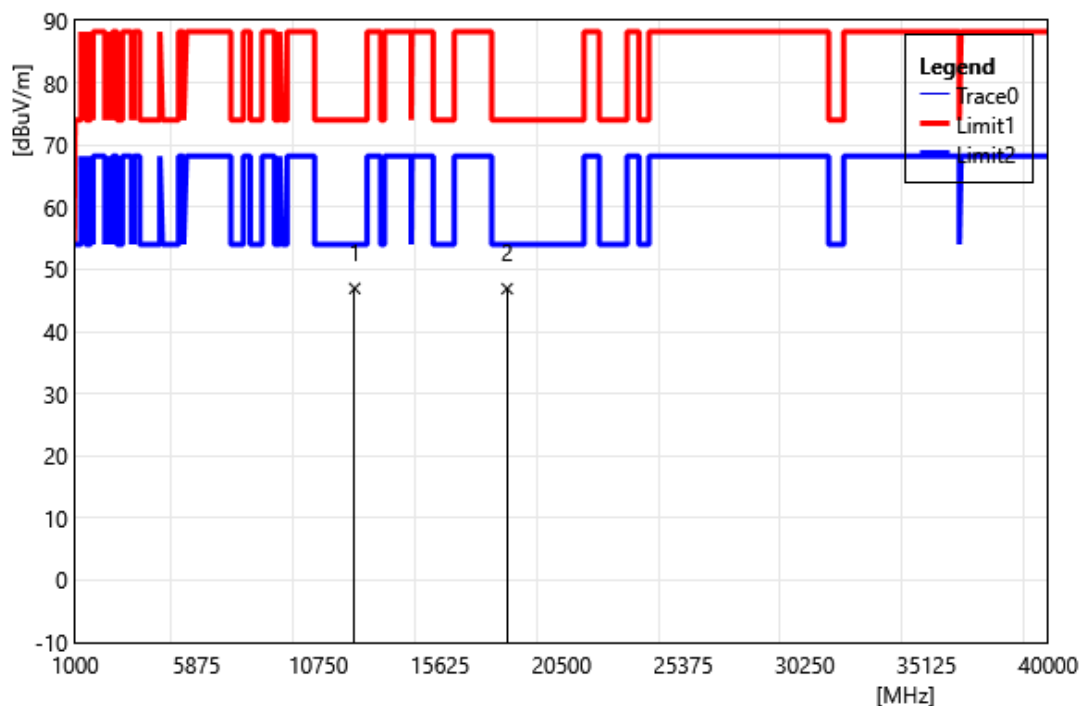


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	34.97	11.96	46.93	74.00	-27.07	PEAK
2	18315.00	31.94	14.93	46.87	74.00	-27.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Horizontal		
Remark:			

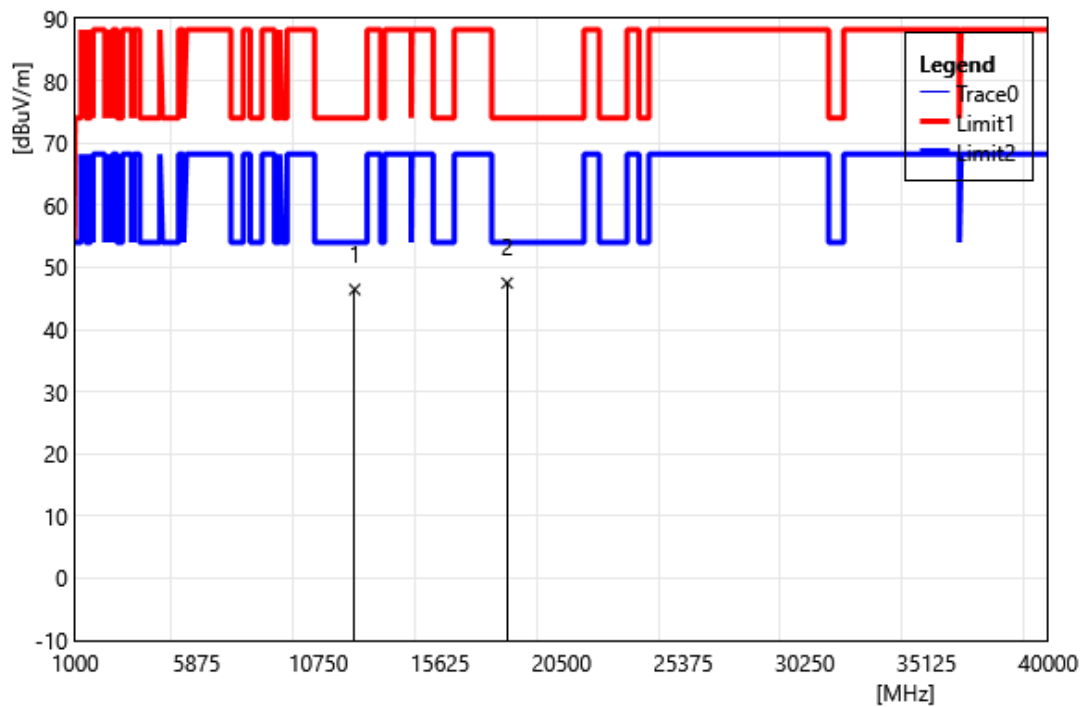


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	34.48	11.96	46.44	74.00	-27.56	PEAK
2	18315.00	32.56	14.93	47.49	74.00	-26.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265 MHz		
Polarization:	Vertical		
Remark:			

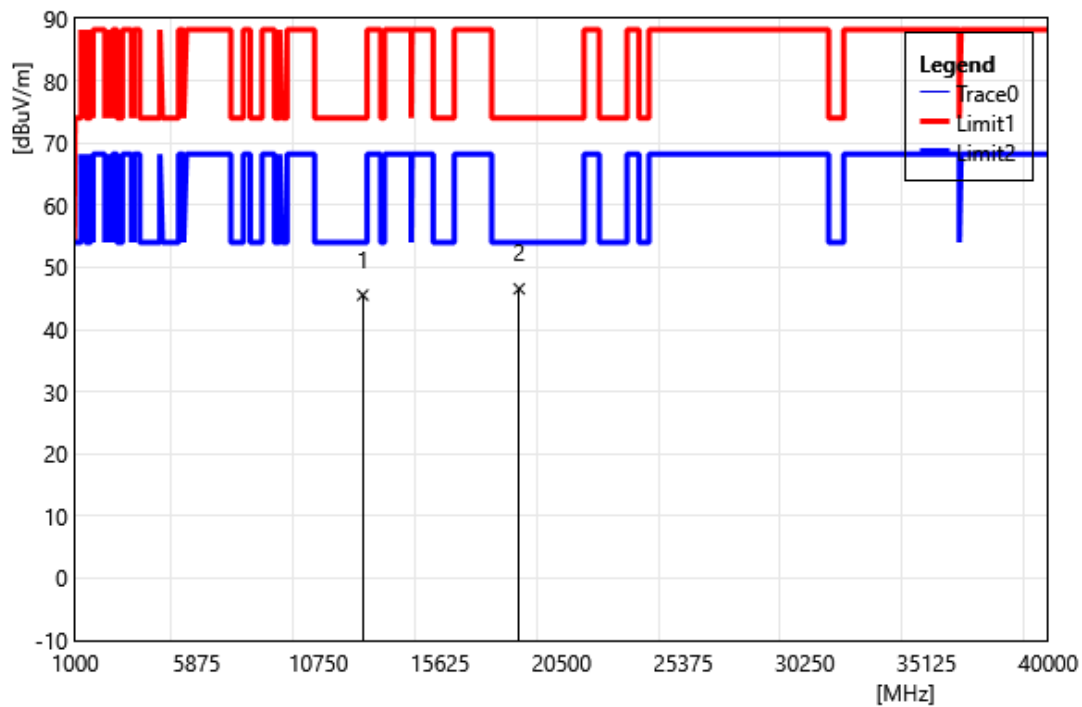


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	33.91	11.64	45.55	74.00	-28.45	PEAK
2	18795.00	31.05	15.49	46.54	74.00	-27.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Horizontal		
Remark:			

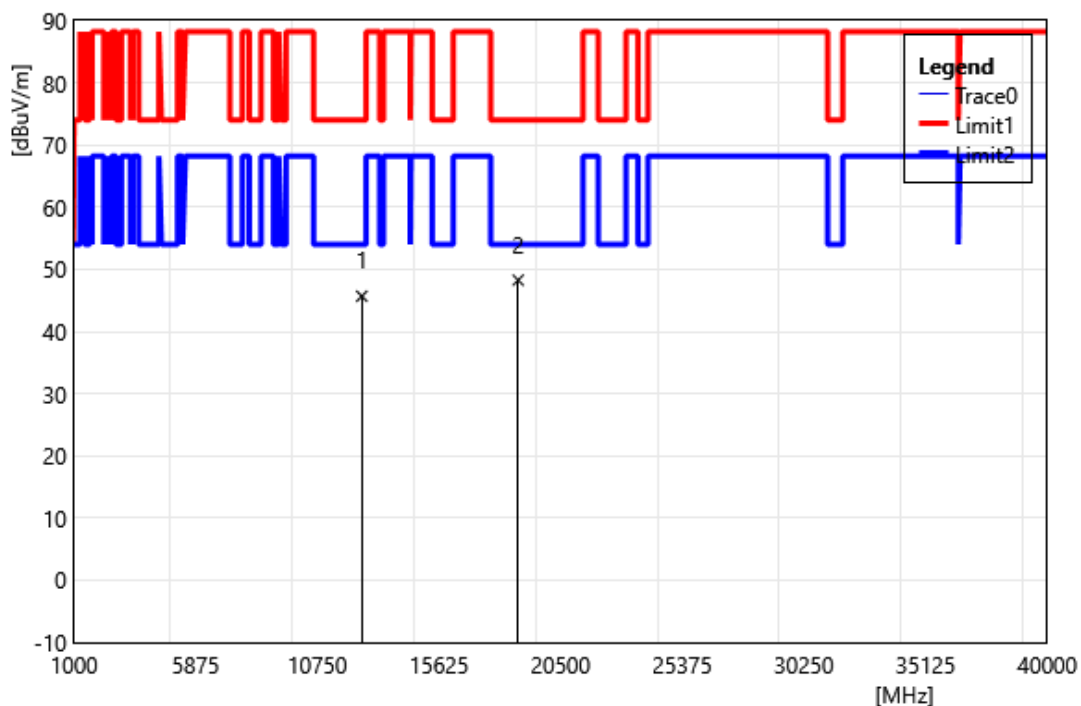


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	34.04	11.64	45.68	74.00	-28.32	PEAK
2	18795.00	32.77	15.49	48.26	74.00	-25.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Vertical		
Remark:			

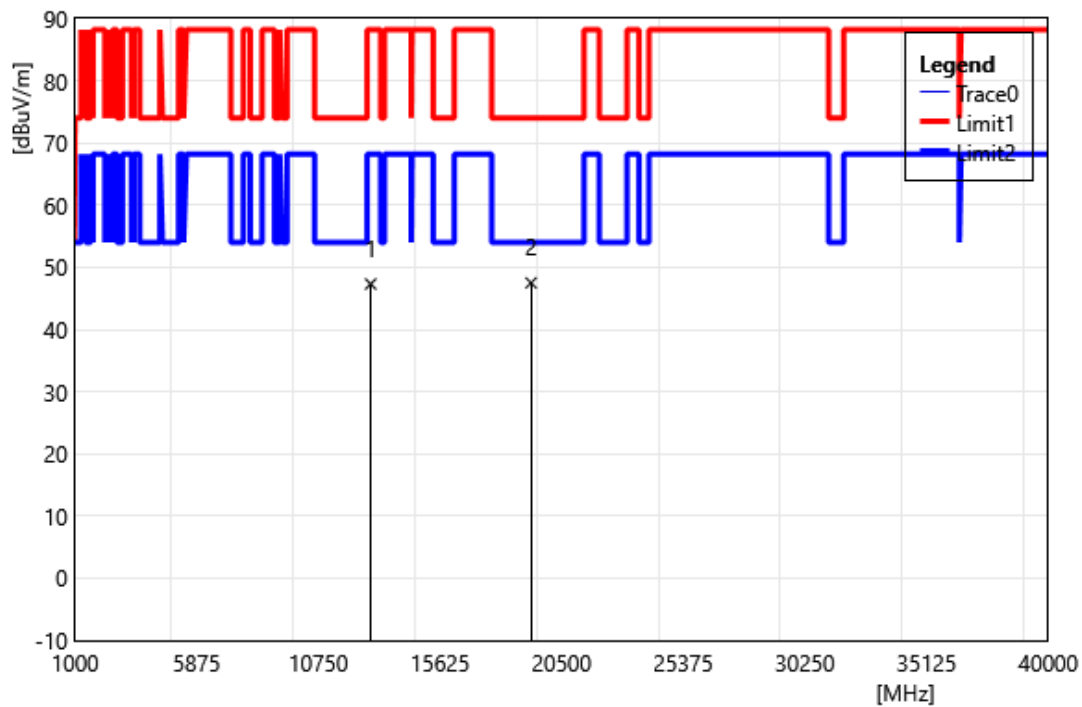


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	34.53	12.79	47.32	88.20	-40.88	PEAK
2	19275.00	31.40	16.10	47.50	74.00	-26.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Horizontal		
Remark:			

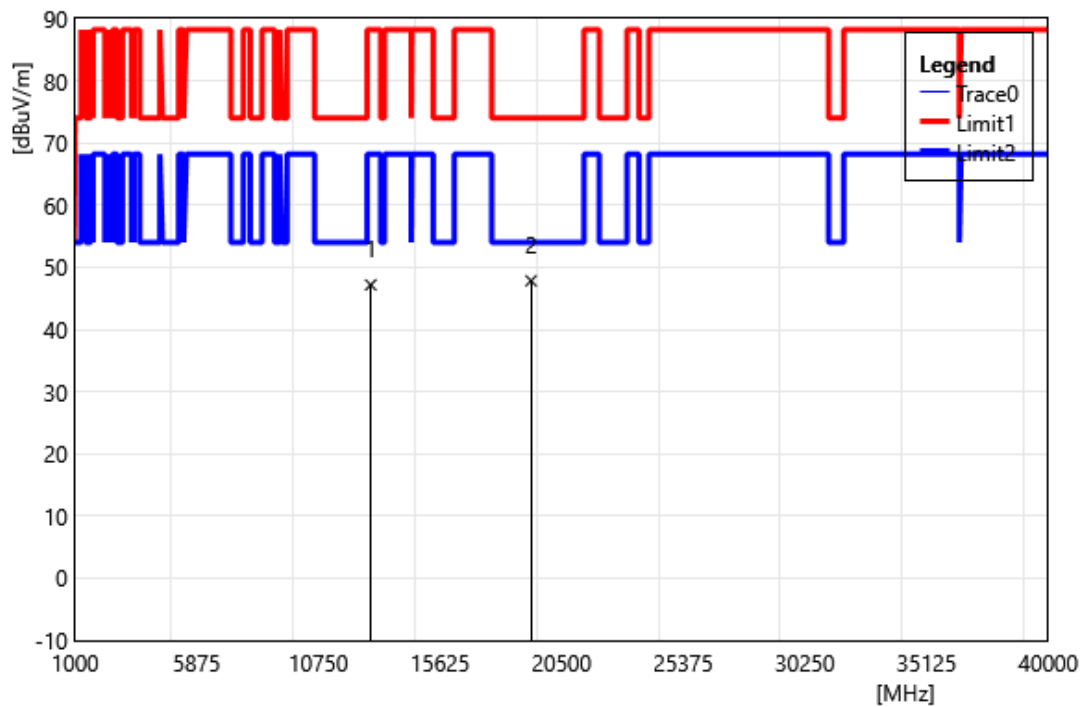


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	34.39	12.79	47.18	88.20	-41.02	PEAK
2	19275.00	31.74	16.10	47.84	74.00	-26.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585 MHz		
Polarization:	Vertical		
Remark:			

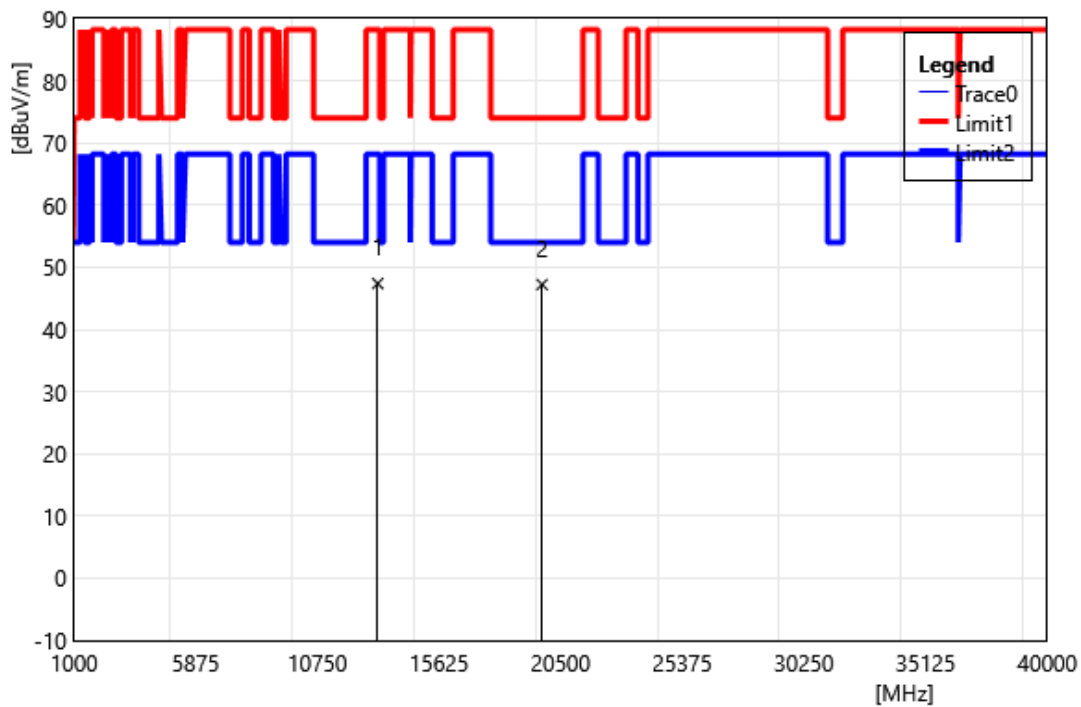


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	34.32	13.08	47.40	88.20	-40.80	PEAK
2	19755.00	31.07	16.16	47.23	74.00	-26.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585 MHz		
Polarization:	Horizontal		
Remark:			

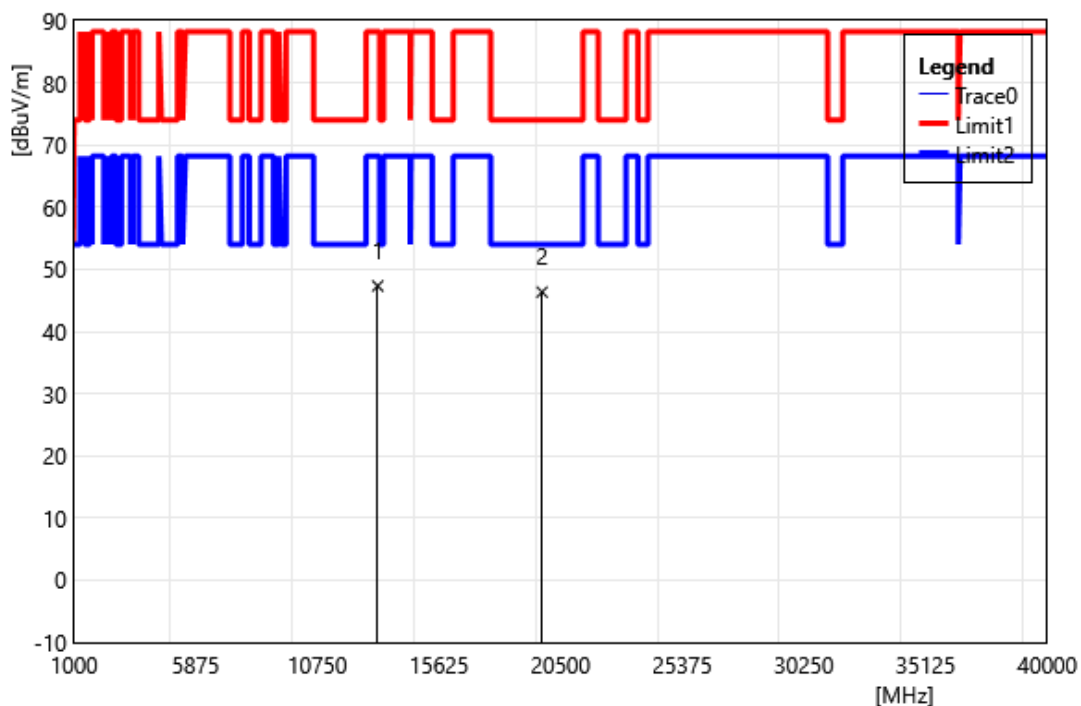


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	34.25	13.08	47.33	88.20	-40.87	PEAK
2	19755.00	30.18	16.16	46.34	74.00	-27.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745		
	MHz		
Polarization:	Vertical		
Remark:			

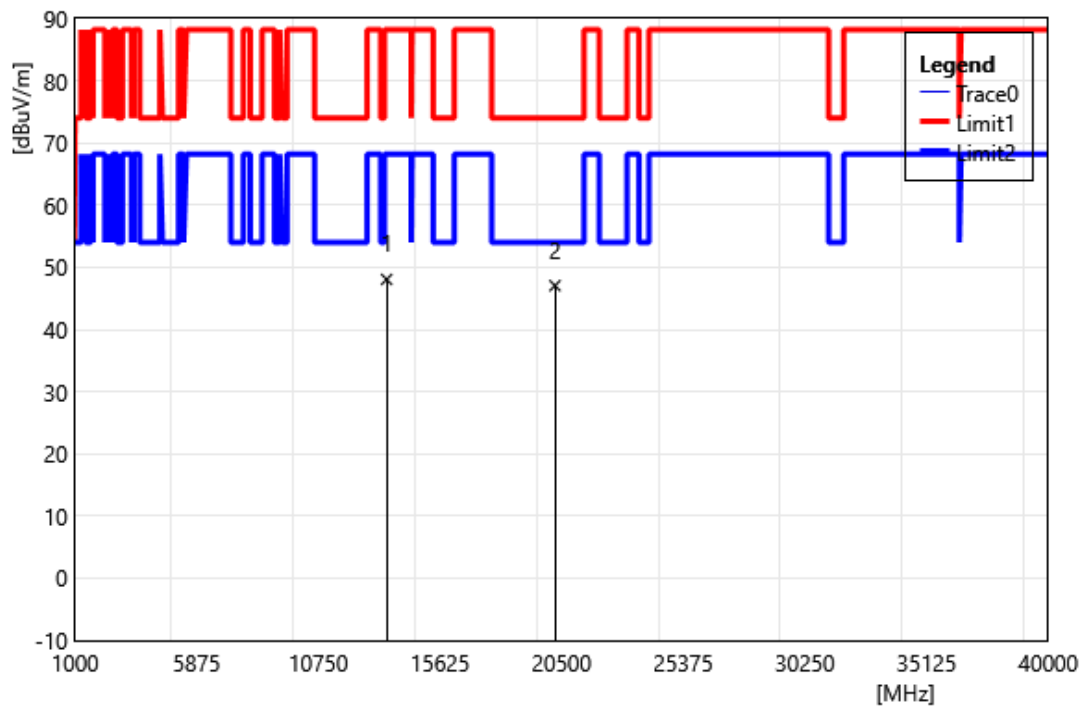


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	33.78	14.28	48.06	88.20	-40.14	PEAK
2	20235.00	30.62	16.43	47.05	74.00	-26.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745 MHz		
Polarization:	Horizontal		
Remark:			

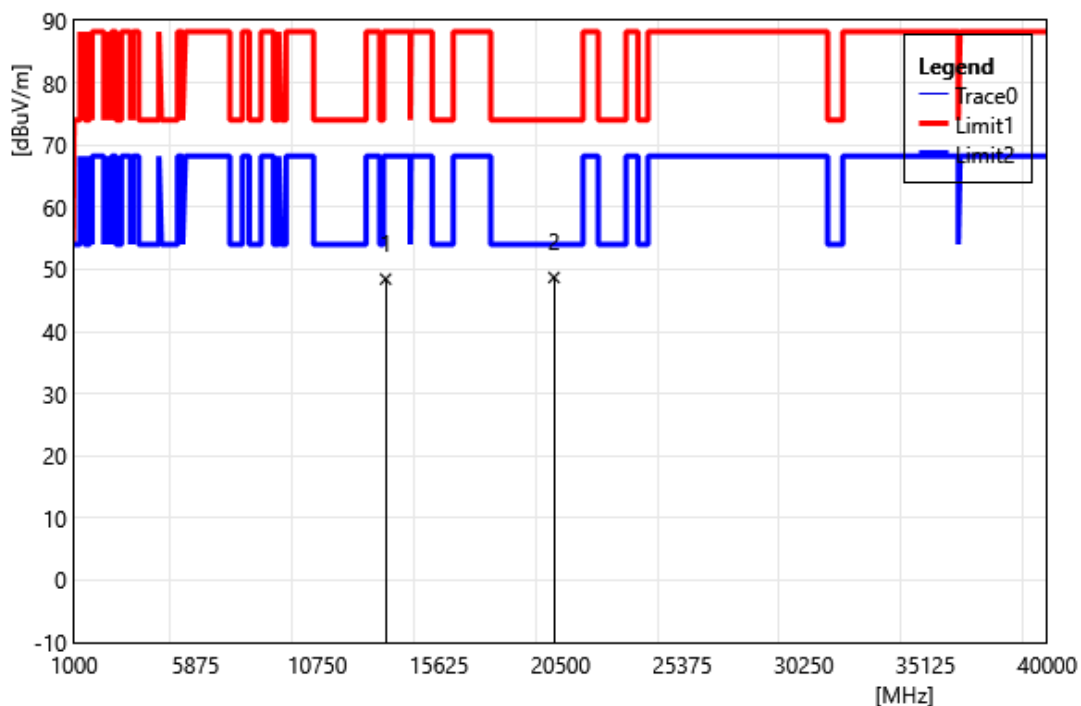


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	34.15	14.28	48.43	88.20	-39.77	PEAK
2	20235.00	32.26	16.43	48.69	74.00	-25.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Vertical		
Remark:			

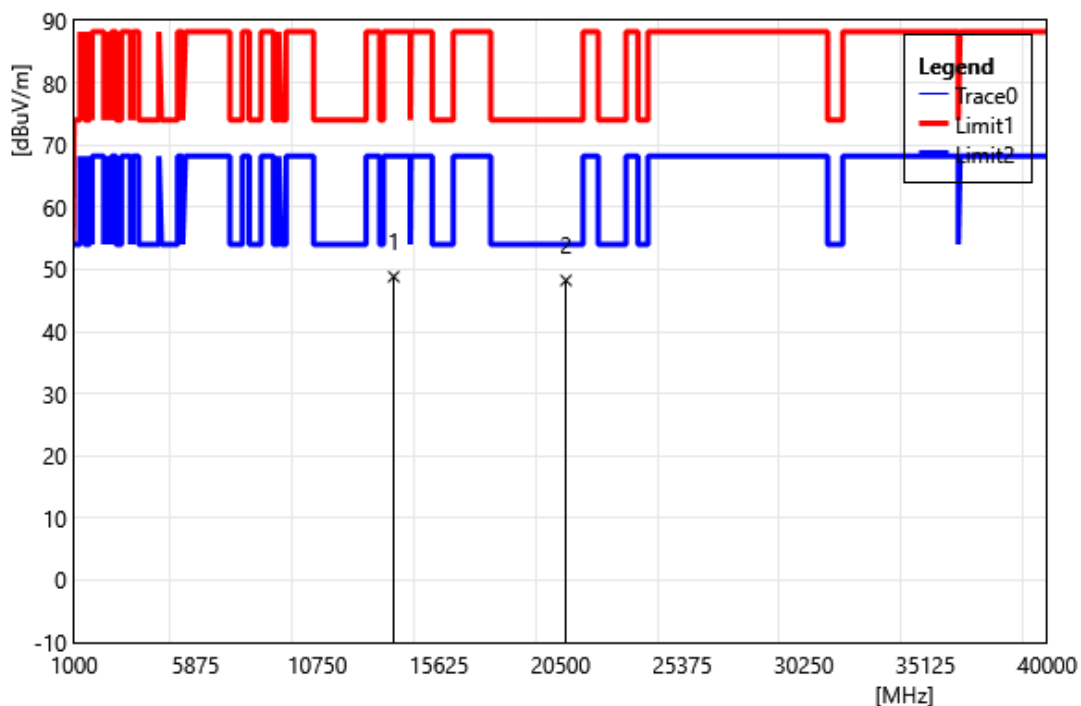

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	34.47	14.34	48.81	88.20	-39.39	PEAK
2	20715.00	31.44	16.78	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Horizontal		
Remark:			

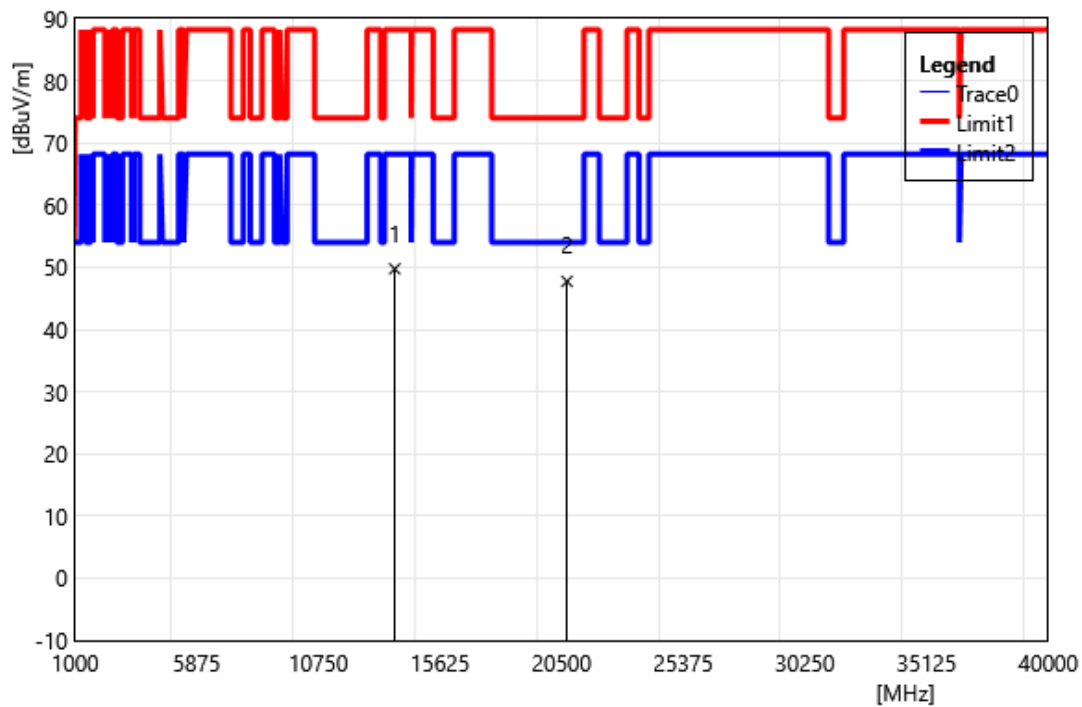

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	35.43	14.34	49.77	88.20	-38.43	PEAK
2	20715.00	30.96	16.78	47.74	74.00	-26.26	PEAK