


Beamforming on


Below 1 GHz

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Vertical		
Remark:			

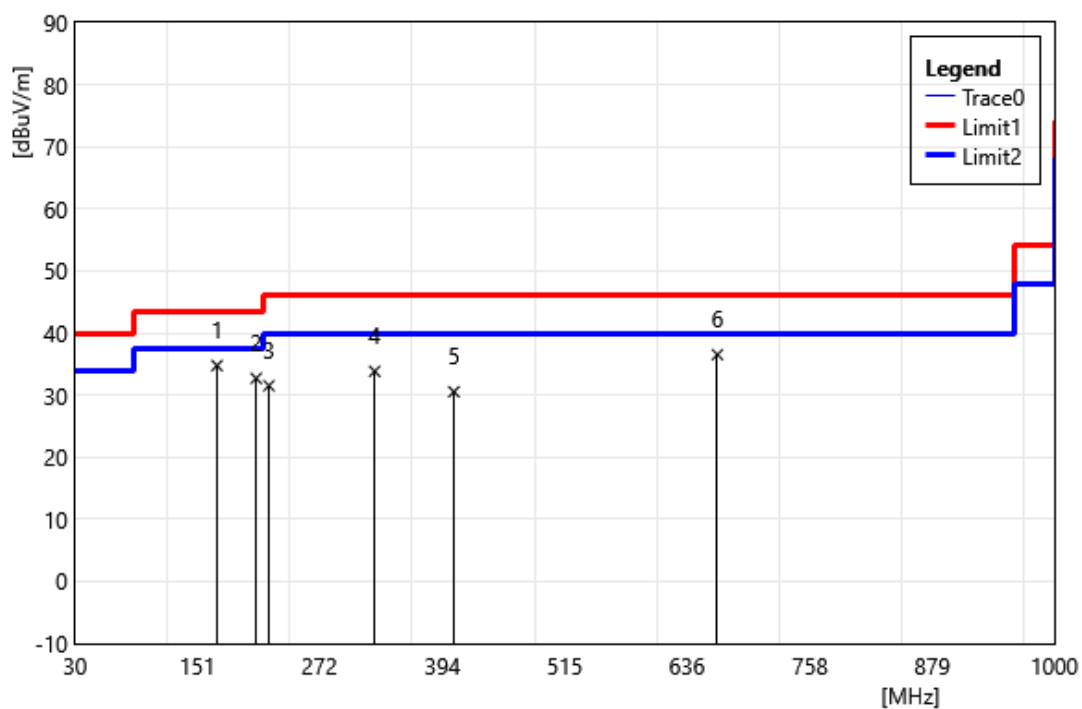

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	170.65	41.86	-7.10	34.77	43.50	-8.74	QP
2	209.45	42.14	-9.44	32.70	43.50	-10.80	QP
3	222.06	39.94	-8.41	31.53	46.00	-14.47	QP
4	326.82	39.10	-5.26	33.84	46.00	-12.16	QP
5	405.39	34.18	-3.63	30.55	46.00	-15.45	QP
6	666.32	35.38	1.14	36.52	46.00	-9.48	QP

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Horizontal		
Remark:			

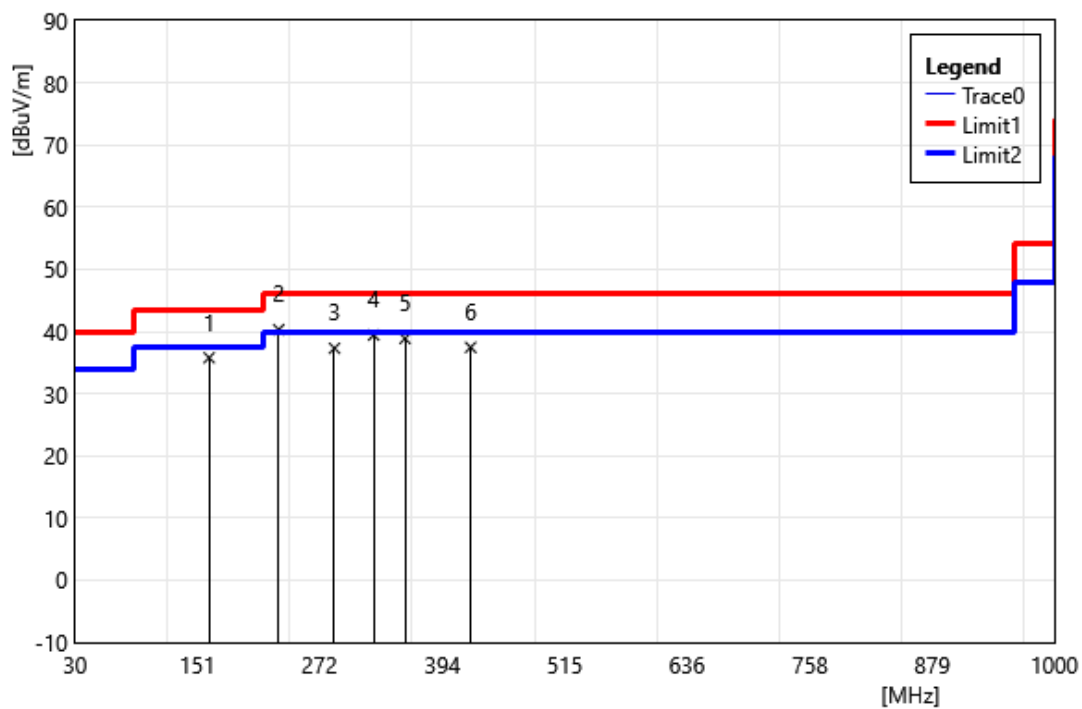


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	162.89	42.52	-6.75	35.77	43.50	-7.73	QP
2	231.76	48.04	-7.75	40.29	46.00	-5.71	QP
3	287.05	42.94	-5.64	37.30	46.00	-8.70	QP
4	325.85	44.71	-5.28	39.43	46.00	-6.57	QP
5	356.89	43.48	-4.60	38.88	46.00	-7.12	QP
6	421.88	40.68	-3.23	37.45	46.00	-8.55	QP

Harmonic


Above 1 GHz

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

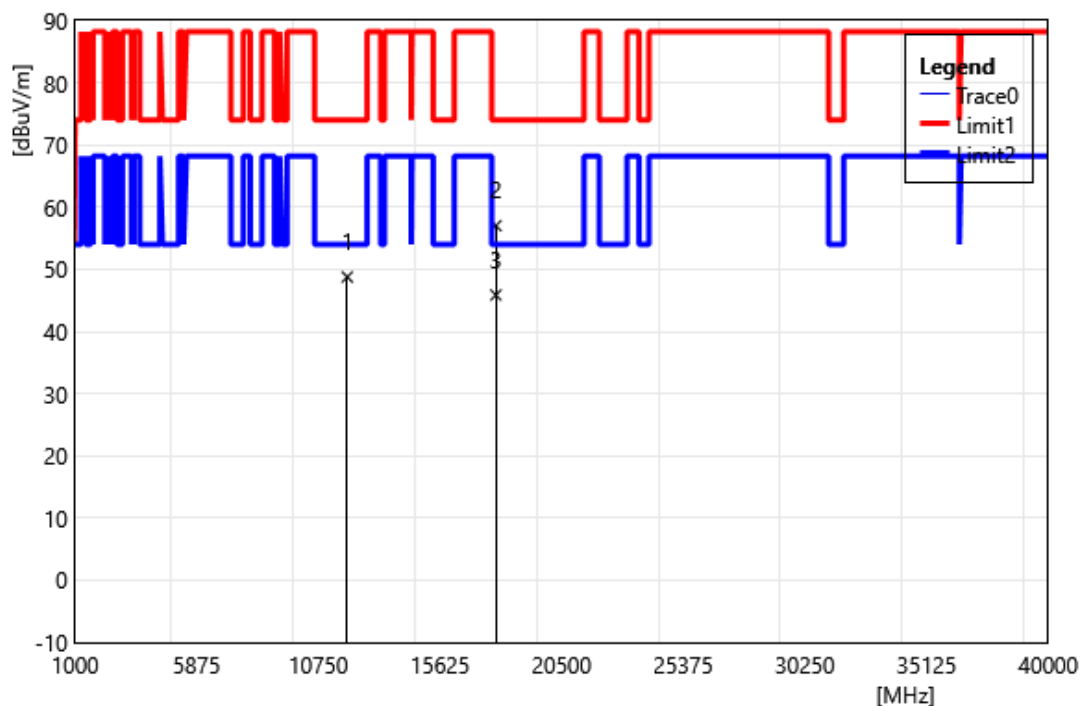


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	37.12	11.66	48.78	74.00	-25.22	PEAK
2	17865.00	32.88	24.14	57.02	74.00	-16.98	PEAK
3	17865.00	21.74	24.14	45.88	54.00	-8.12	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

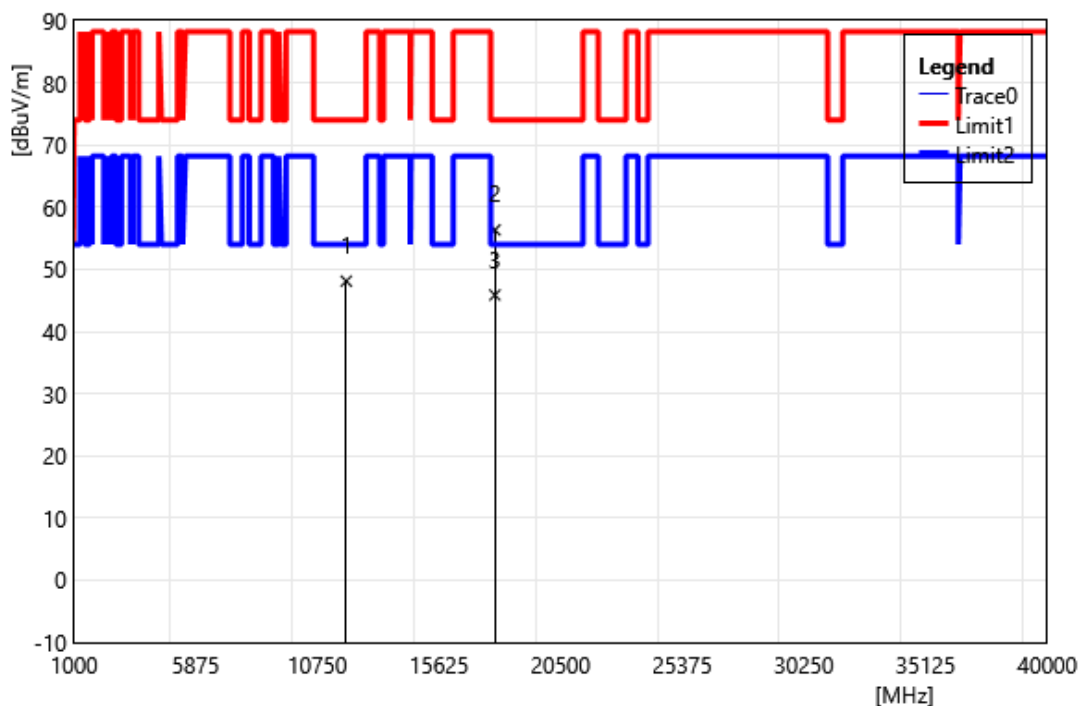


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	36.45	11.66	48.11	74.00	-25.89	PEAK
2	17865.00	32.20	24.14	56.34	74.00	-17.66	PEAK
3	17865.00	21.73	24.14	45.87	54.00	-8.13	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6175		
	MHz		
Polarization:	Vertical		
Remark:			

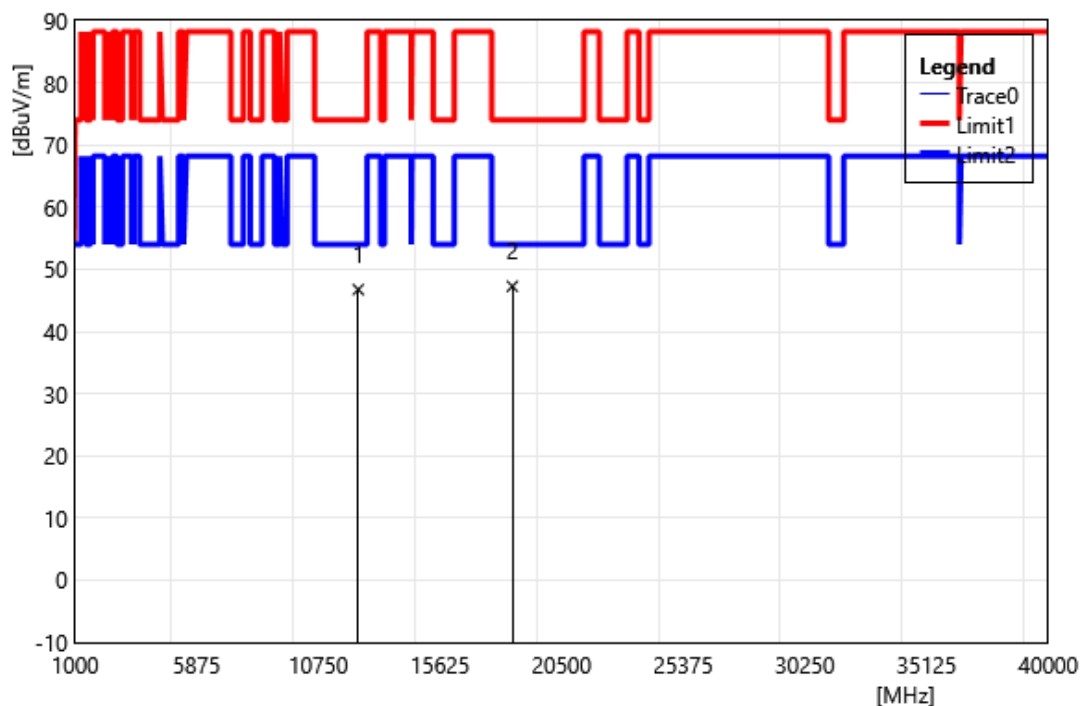


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	35.04	11.71	46.75	74.00	-27.25	PEAK
2	18525.00	32.35	14.91	47.26	74.00	-26.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6175		
	MHz		
Polarization:	Horizontal		
Remark:			

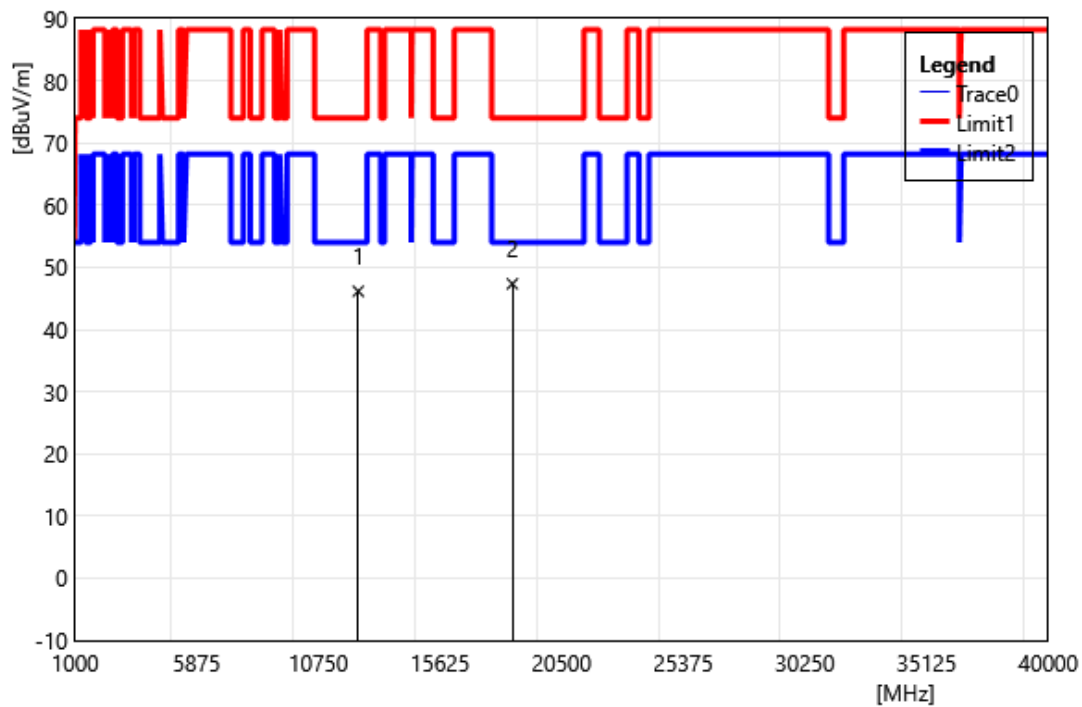


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	34.45	11.71	46.16	74.00	-27.84	PEAK
2	18525.00	32.44	14.91	47.35	74.00	-26.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6415		
	MHz		
Polarization:	Vertical		
Remark:			

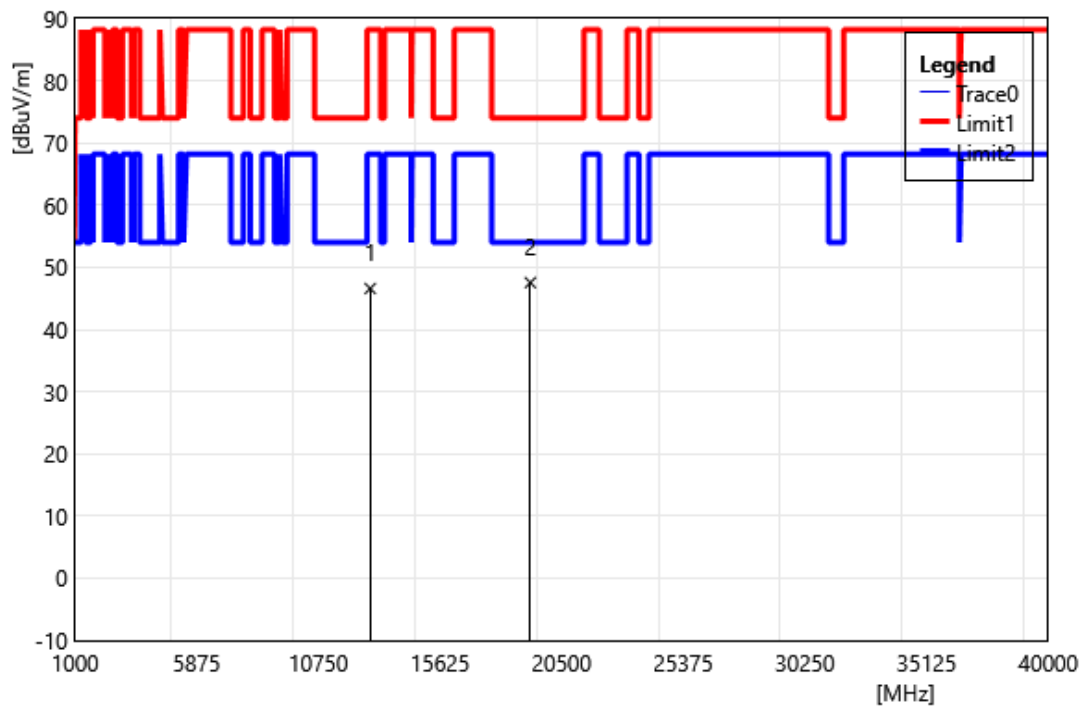


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	33.83	12.77	46.60	88.20	-41.60	PEAK
2	19245.00	31.51	16.04	47.55	74.00	-26.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6415		
	MHz		
Polarization:	Horizontal		
Remark:			

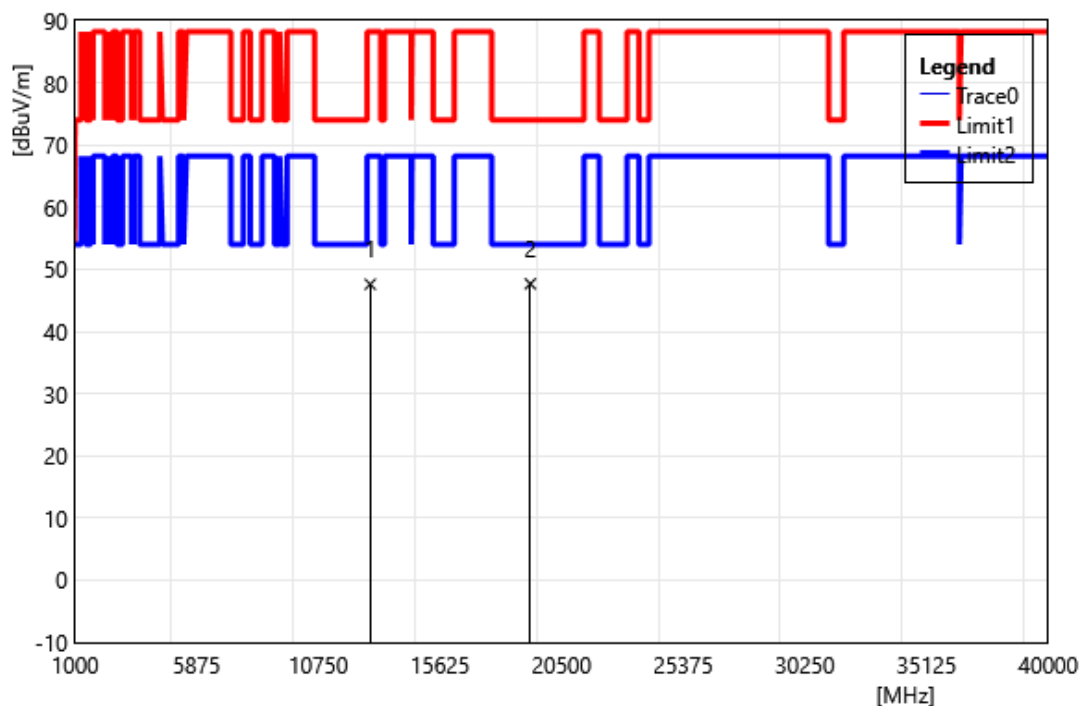


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	34.82	12.77	47.59	88.20	-40.61	PEAK
2	19245.00	31.63	16.04	47.67	74.00	-26.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6435		
	MHz		
Polarization:	Vertical		
Remark:			

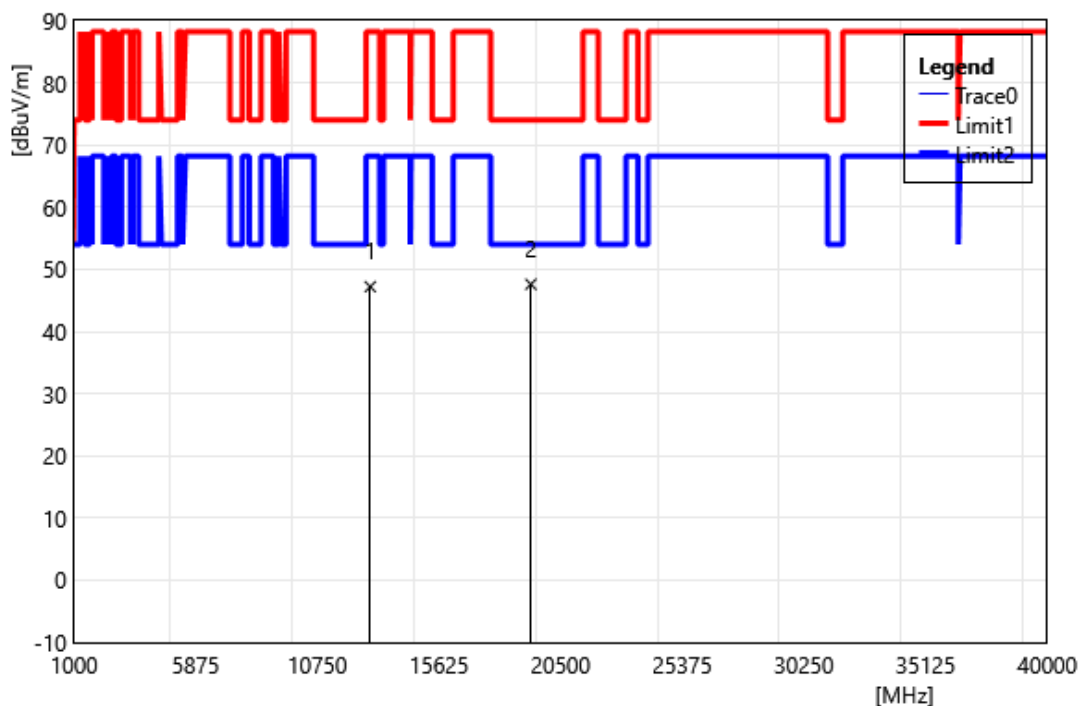


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	34.40	12.81	47.21	88.20	-40.99	PEAK
2	19305.00	31.45	16.15	47.60	74.00	-26.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6435		
	MHz		
Polarization:	Horizontal		
Remark:			

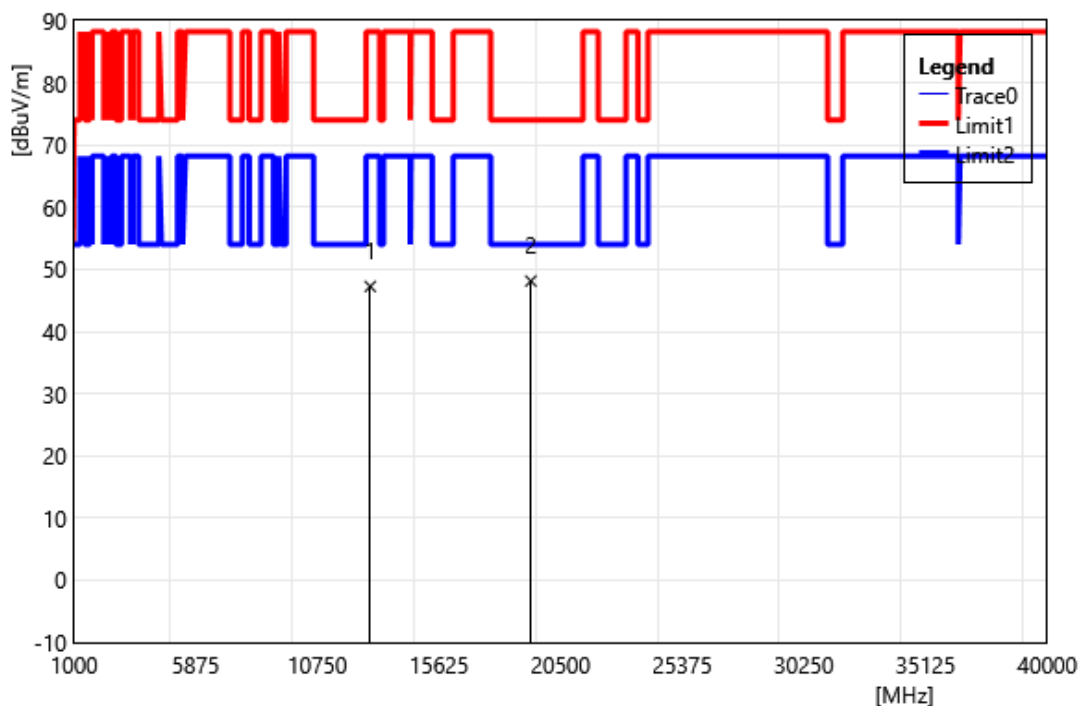


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	34.44	12.81	47.25	88.20	-40.95	PEAK
2	19305.00	31.97	16.15	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6475		
	MHz		
Polarization:	Vertical		
Remark:			

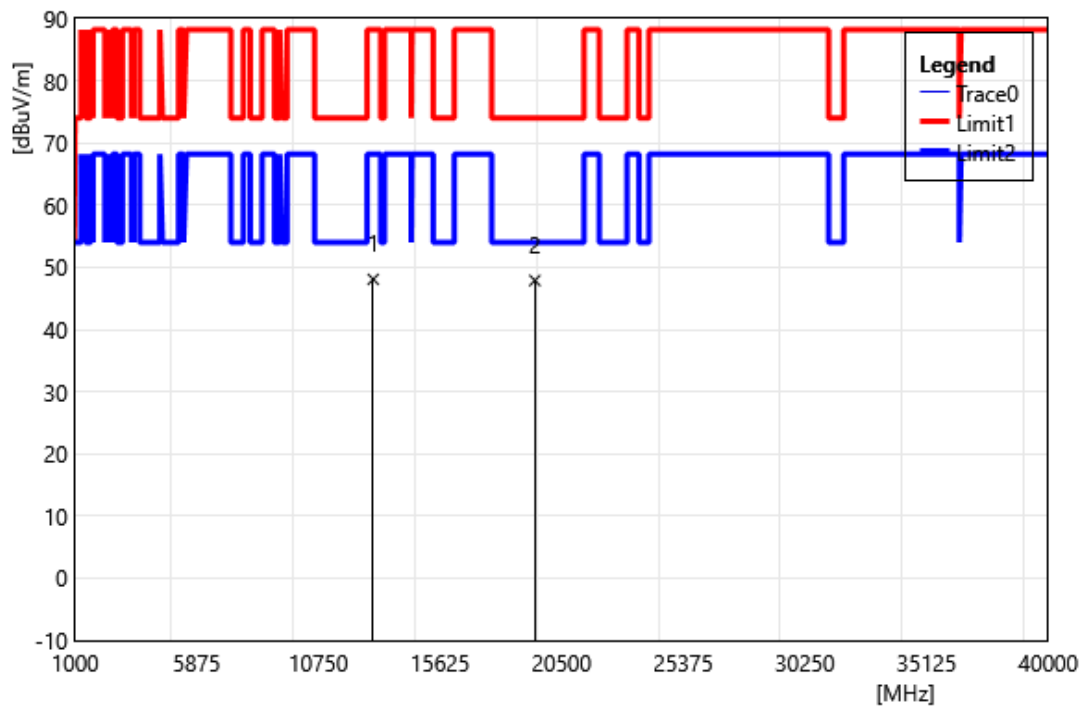


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	35.13	12.94	48.07	88.20	-40.13	PEAK
2	19425.00	31.50	16.38	47.88	74.00	-26.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6475		
	MHz		
Polarization:	Horizontal		
Remark:			

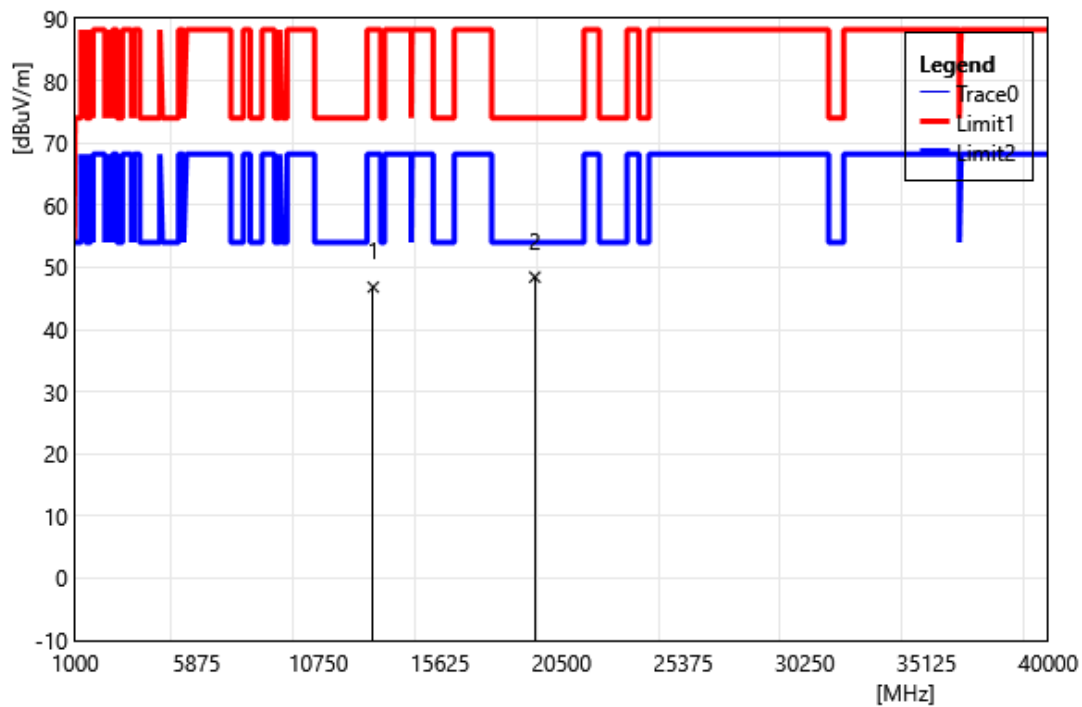


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	33.88	12.94	46.82	88.20	-41.38	PEAK
2	19425.00	32.05	16.38	48.43	74.00	-25.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6515		
	MHz		
Polarization:	Vertical		
Remark:			

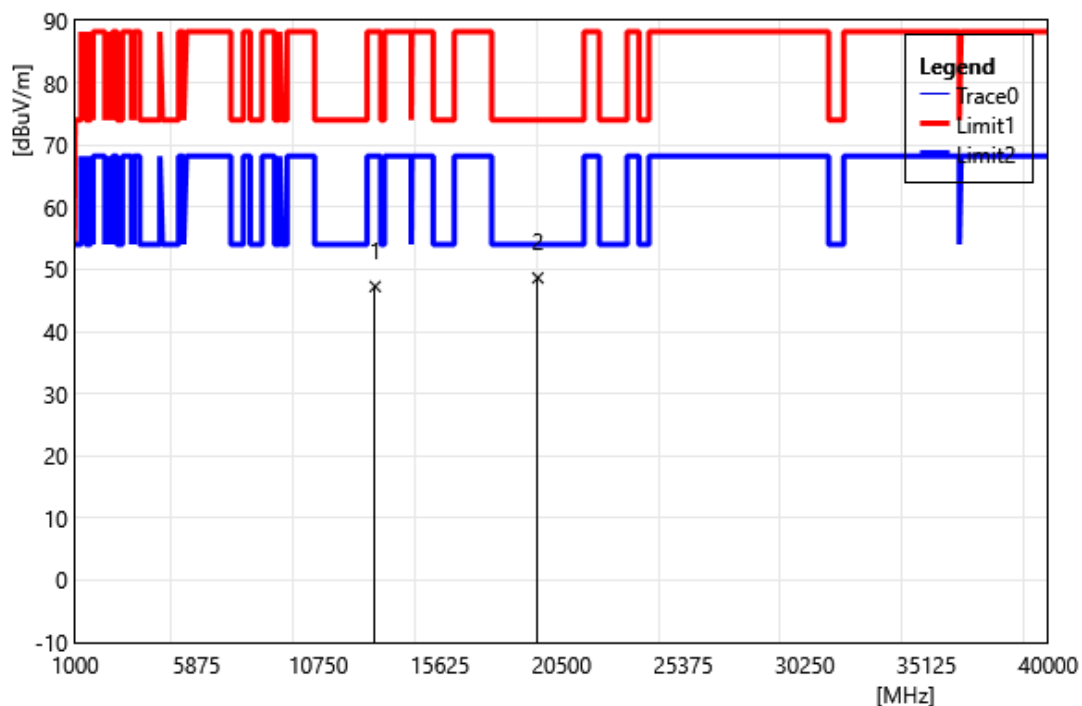


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	34.22	13.01	47.23	88.20	-40.97	PEAK
2	19545.00	32.79	15.84	48.63	74.00	-25.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6515		
	MHz		
Polarization:	Horizontal		
Remark:			

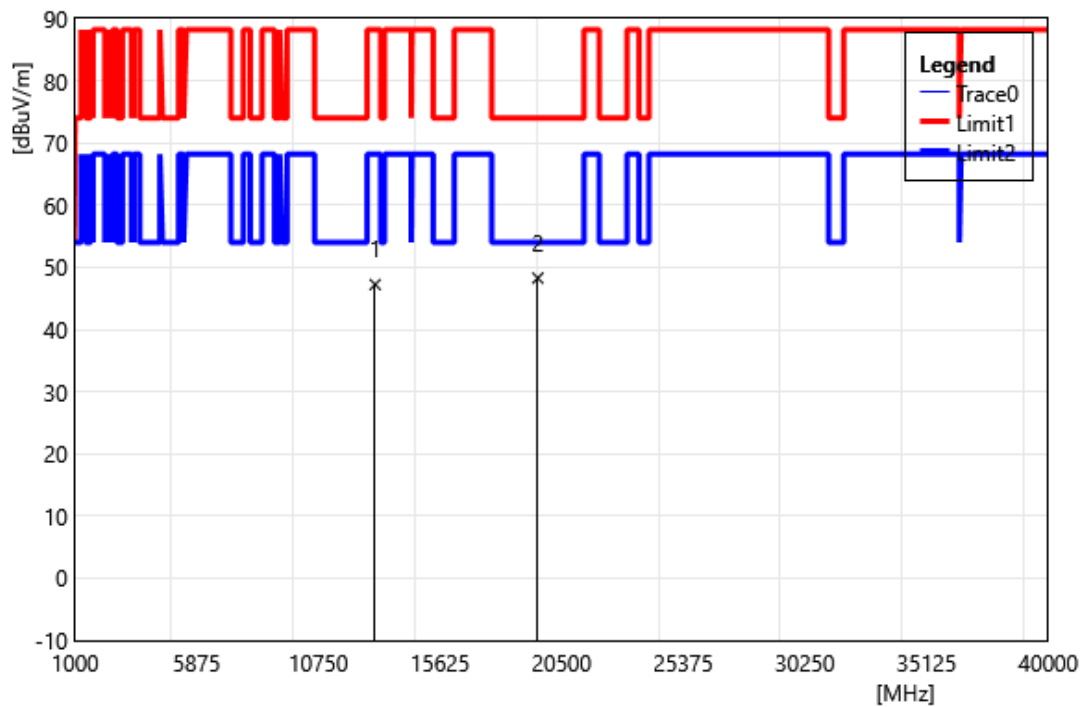


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	34.22	13.01	47.23	88.20	-40.97	PEAK
2	19545.00	32.44	15.84	48.28	74.00	-25.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6535		
	MHz		
Polarization:	Vertical		
Remark:			

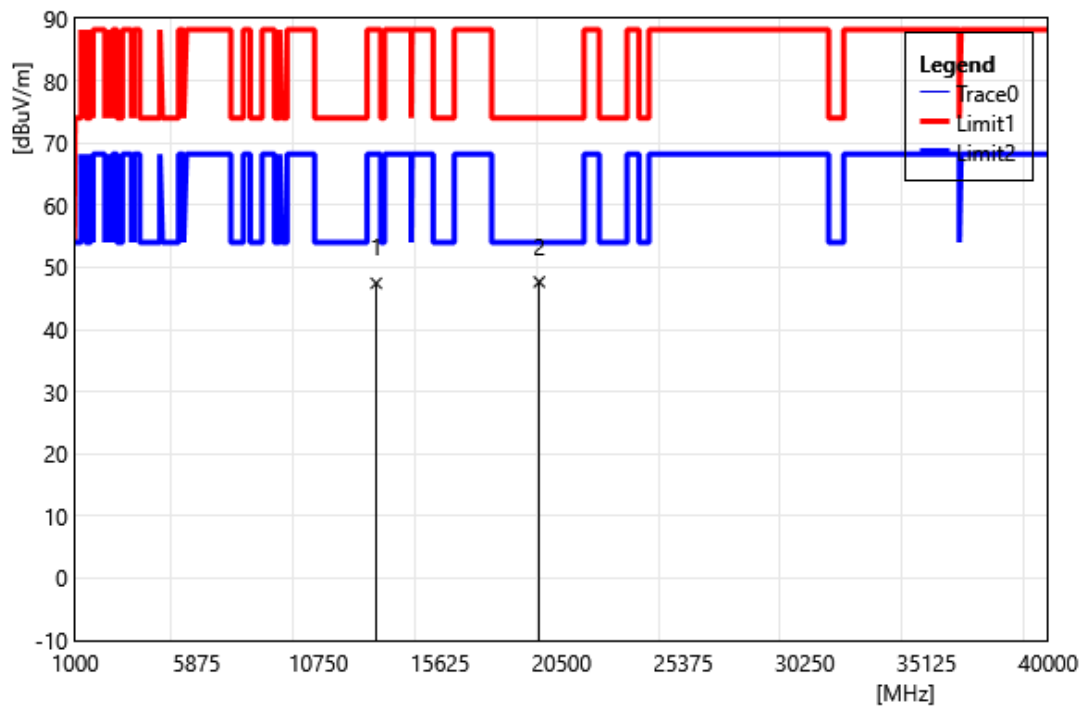


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	34.46	12.97	47.43	88.20	-40.77	PEAK
2	19605.00	31.72	15.93	47.65	74.00	-26.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6535		
	MHz		
Polarization:	Horizontal		
Remark:			

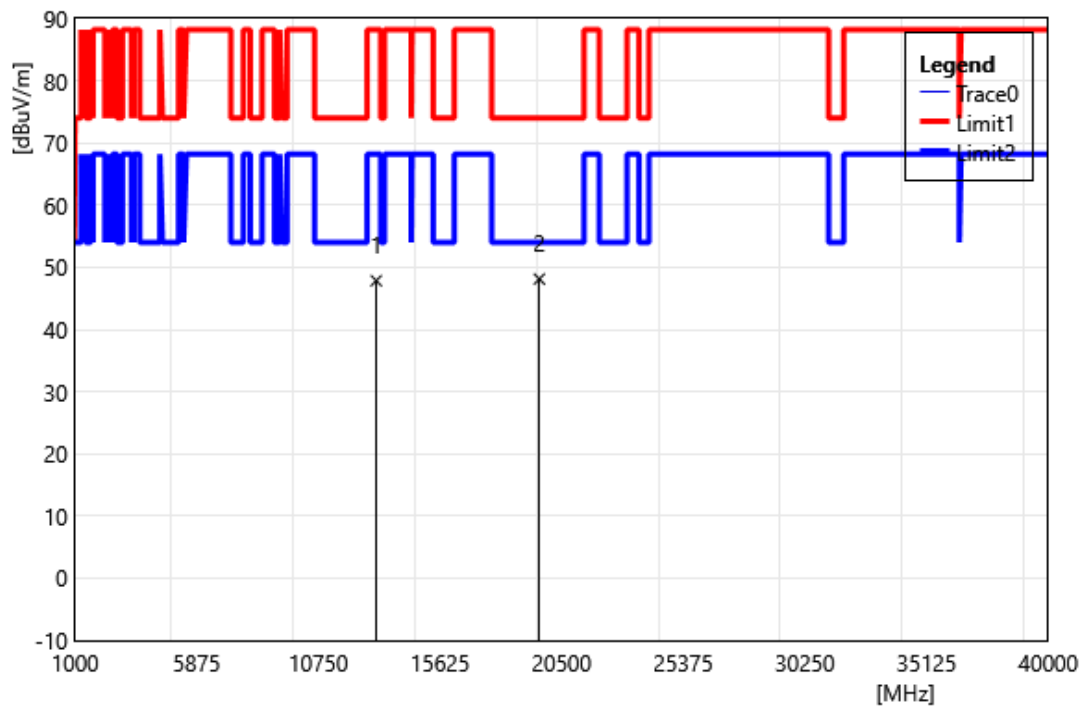


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	34.88	12.97	47.85	88.20	-40.35	PEAK
2	19605.00	32.19	15.93	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6695		
	MHz		
Polarization:	Vertical		
Remark:			

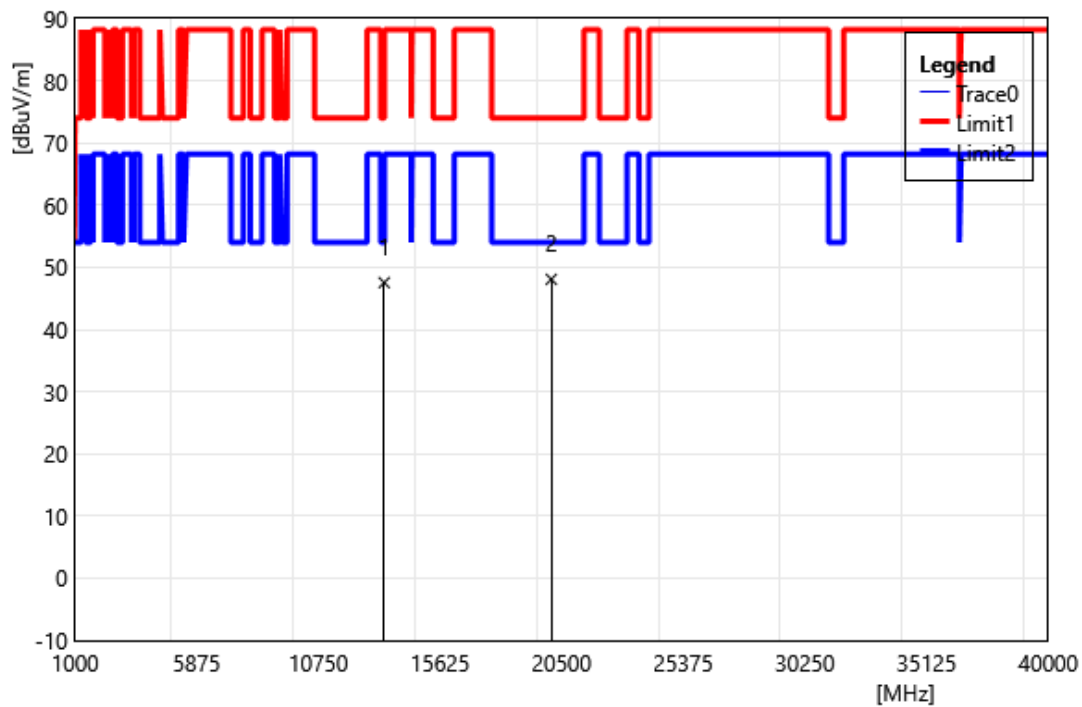


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	33.77	13.78	47.55	74.00	-26.45	PEAK
2	20085.00	31.86	16.22	48.08	74.00	-25.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6695		
	MHz		
Polarization:	Horizontal		
Remark:			

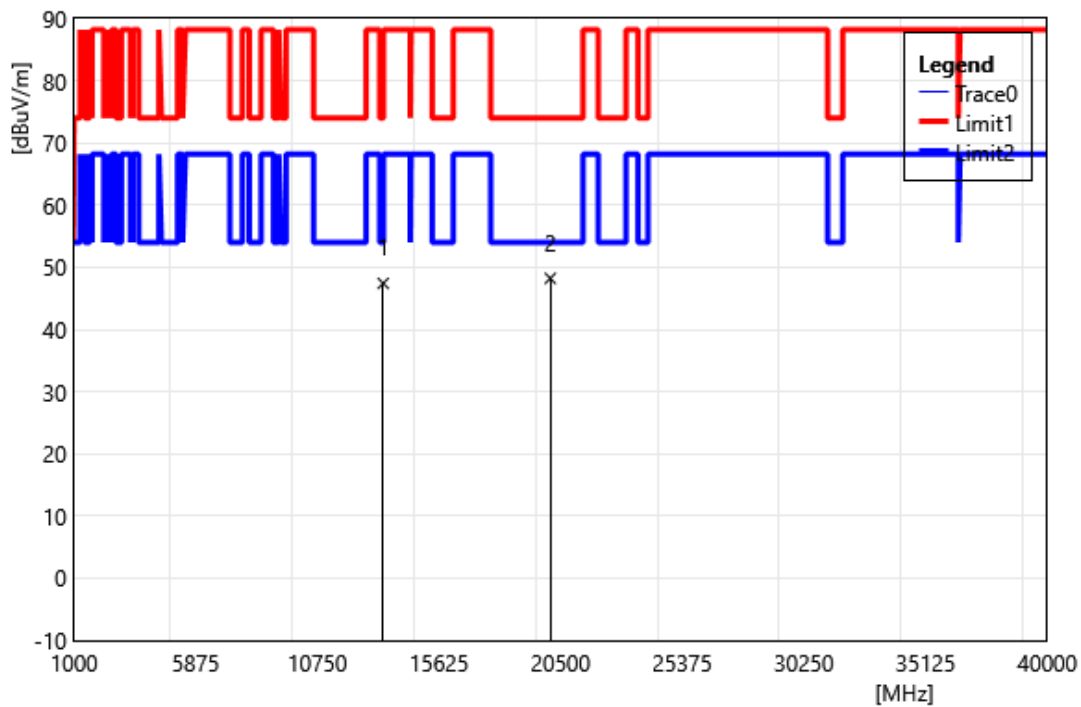


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	33.64	13.78	47.42	74.00	-26.58	PEAK
2	20085.00	32.01	16.22	48.23	74.00	-25.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6855		
	MHz		
Polarization:	Vertical		
Remark:			

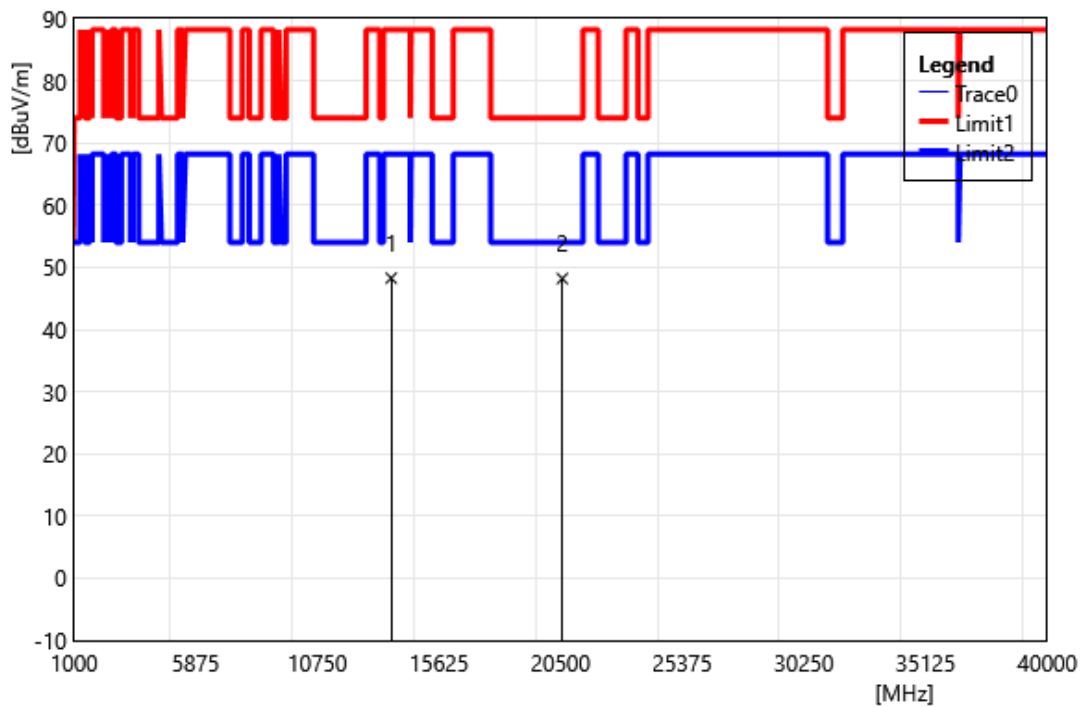


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	33.70	14.57	48.27	88.20	-39.93	PEAK
2	20565.00	31.61	16.59	48.20	74.00	-25.80	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6855		
	MHz		
Polarization:	Horizontal		
Remark:			

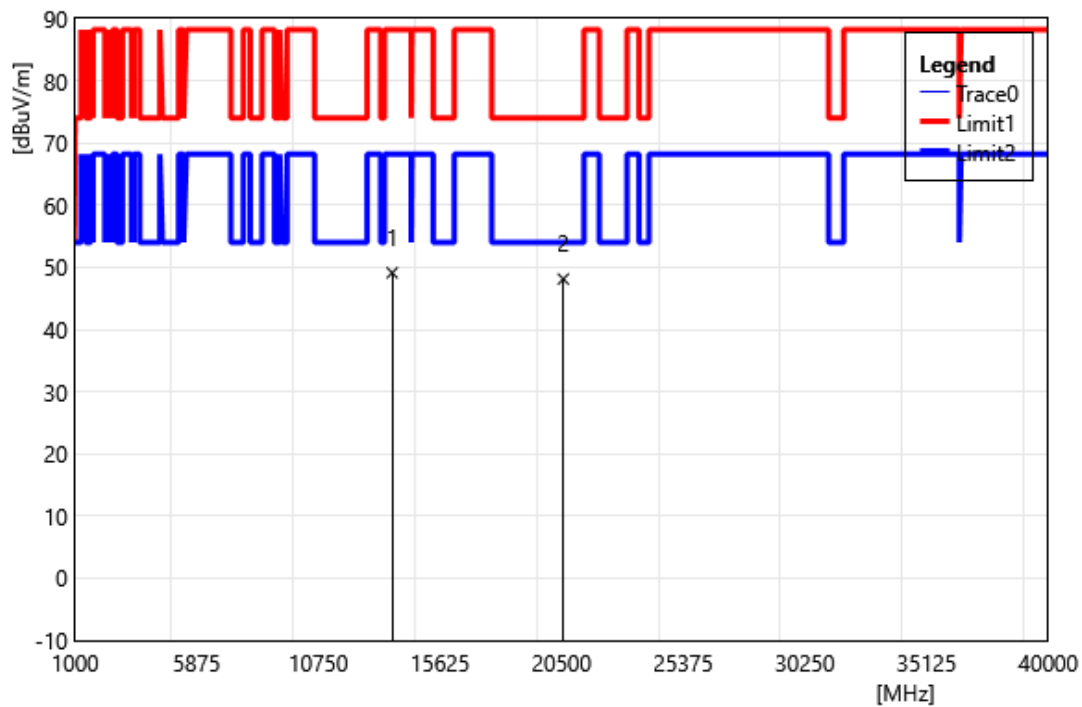


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	34.55	14.57	49.12	88.20	-39.08	PEAK
2	20565.00	31.53	16.59	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6875		
	MHz		
Polarization:	Vertical		
Remark:			

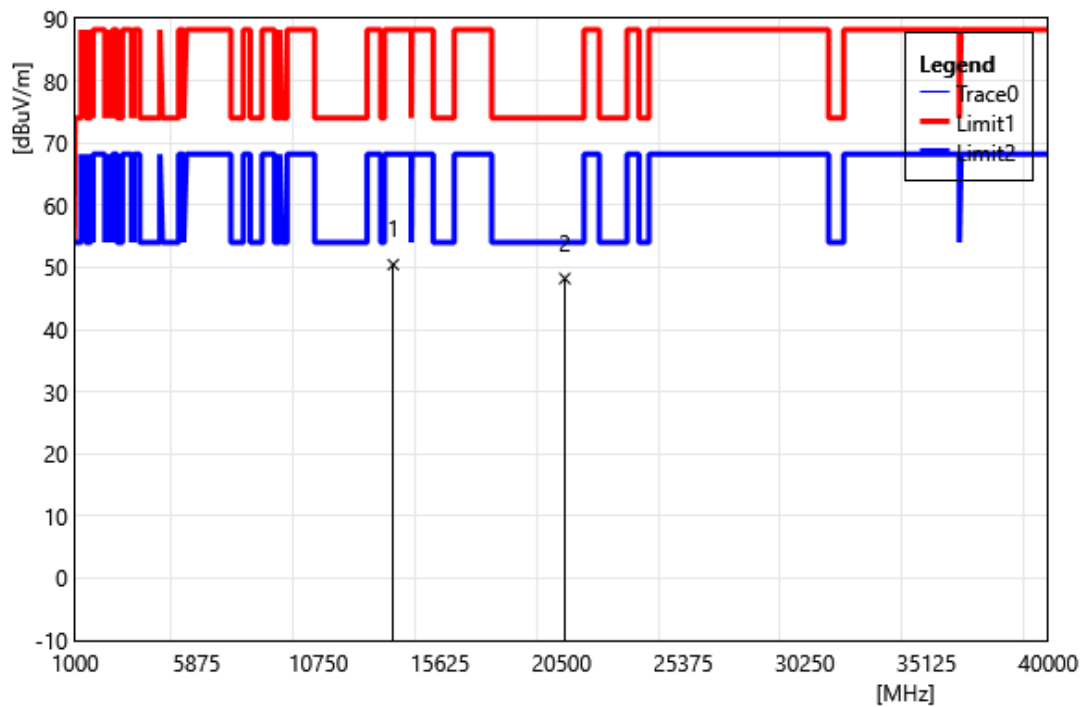


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	36.00	14.44	50.44	88.20	-37.76	PEAK
2	20625.00	31.54	16.66	48.20	74.00	-25.80	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6875		
	MHz		
Polarization:	Horizontal		
Remark:			

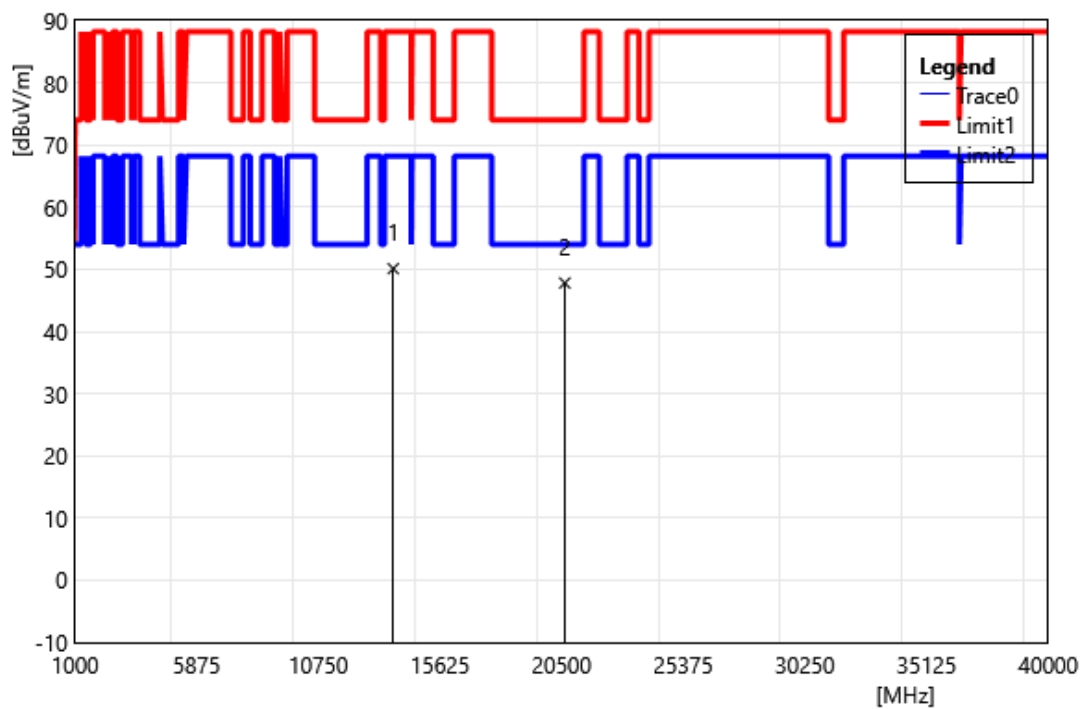


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	35.68	14.44	50.12	88.20	-38.08	PEAK
2	20625.00	31.15	16.66	47.81	74.00	-26.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6895		
	MHz		
Polarization:	Vertical		
Remark:			

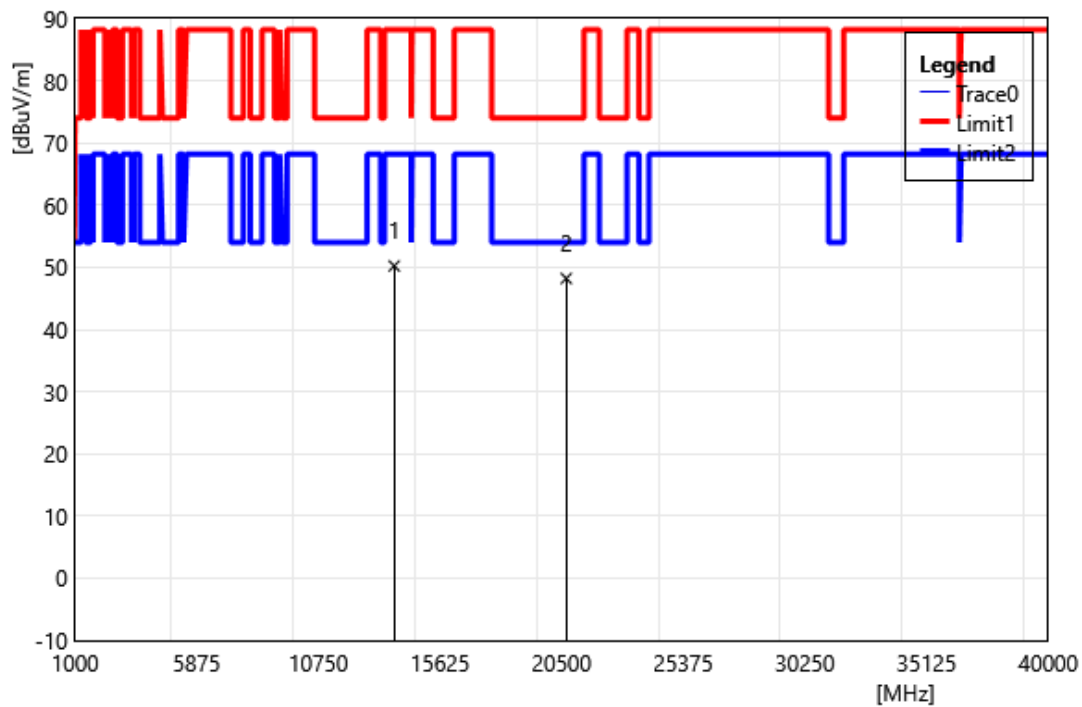


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	35.92	14.31	50.23	88.20	-37.97	PEAK
2	20685.00	31.48	16.74	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6895		
	MHz		
Polarization:	Horizontal		
Remark:			

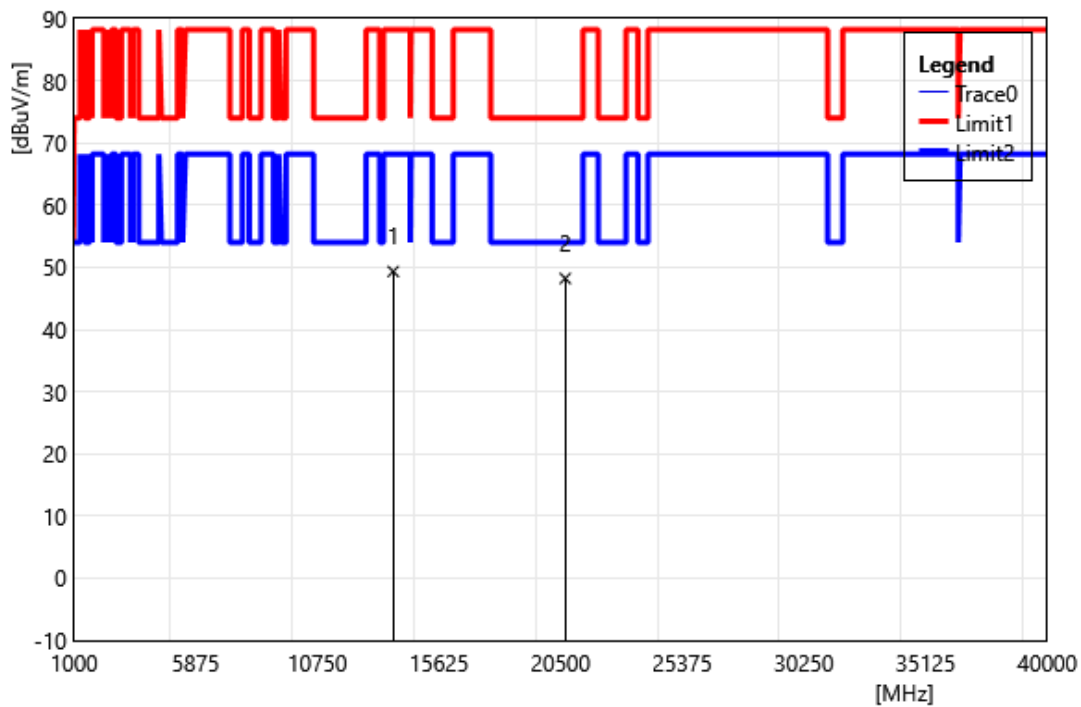


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	35.03	14.31	49.34	88.20	-38.86	PEAK
2	20685.00	31.48	16.74	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6995		
	MHz		
Polarization:	Vertical		
Remark:			

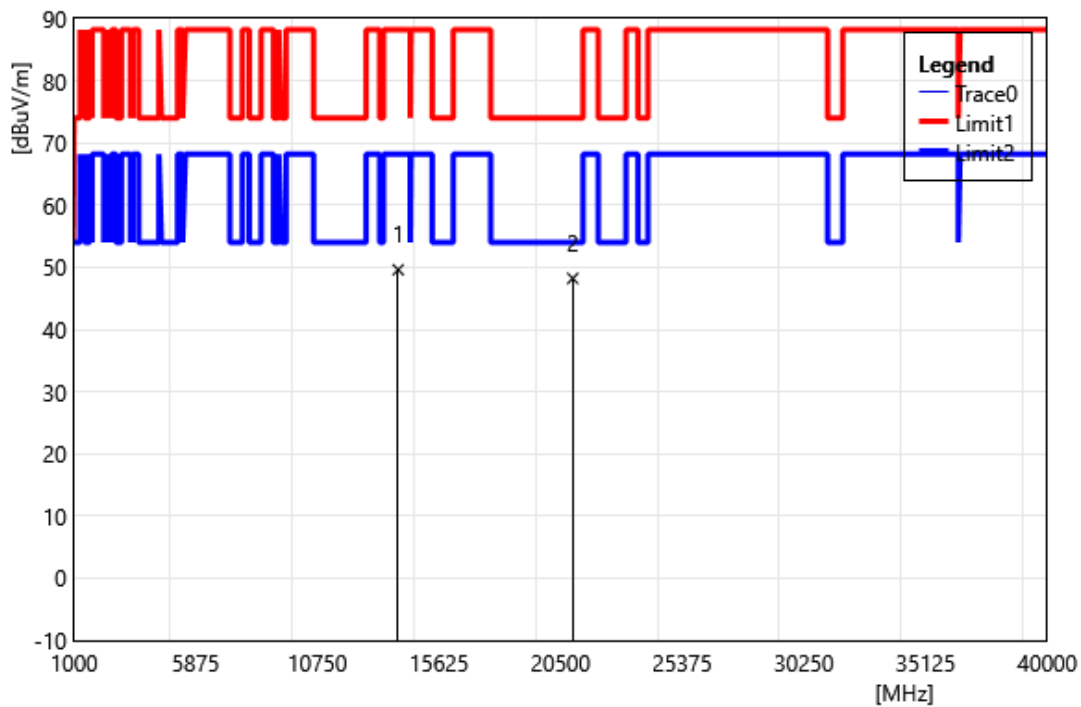


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	34.76	14.85	49.61	88.20	-38.59	PEAK
2	20985.00	31.10	17.12	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6995		
	MHz		
Polarization:	Horizontal		
Remark:			

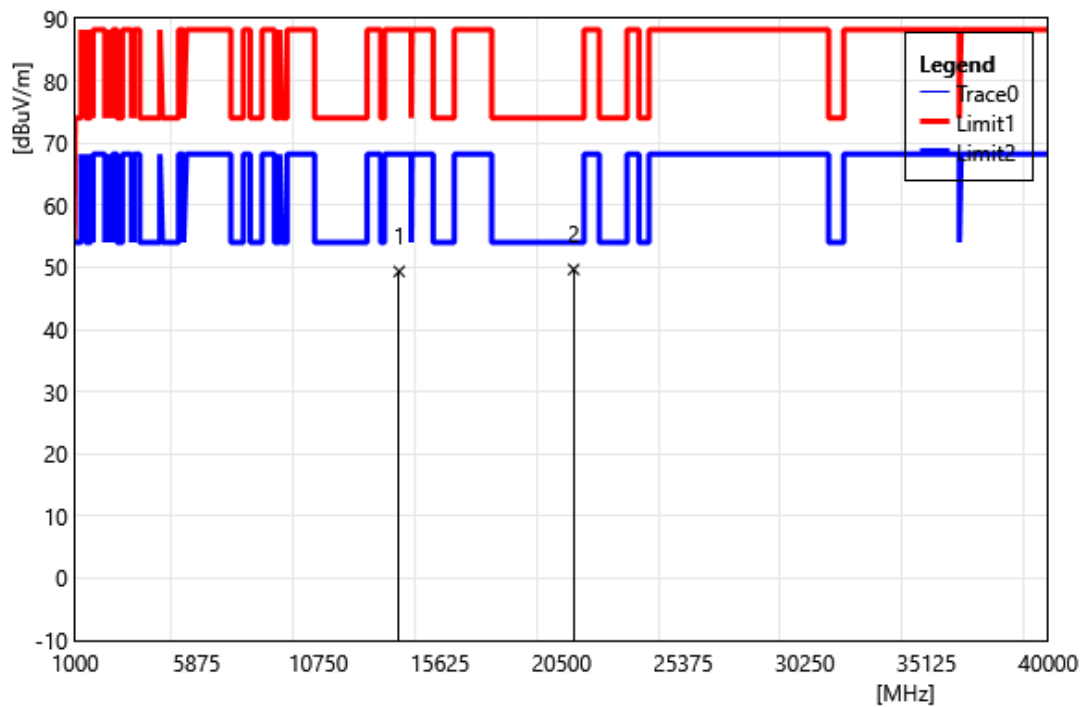


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	34.49	14.85	49.34	88.20	-38.86	PEAK
2	20985.00	32.54	17.12	49.66	74.00	-24.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

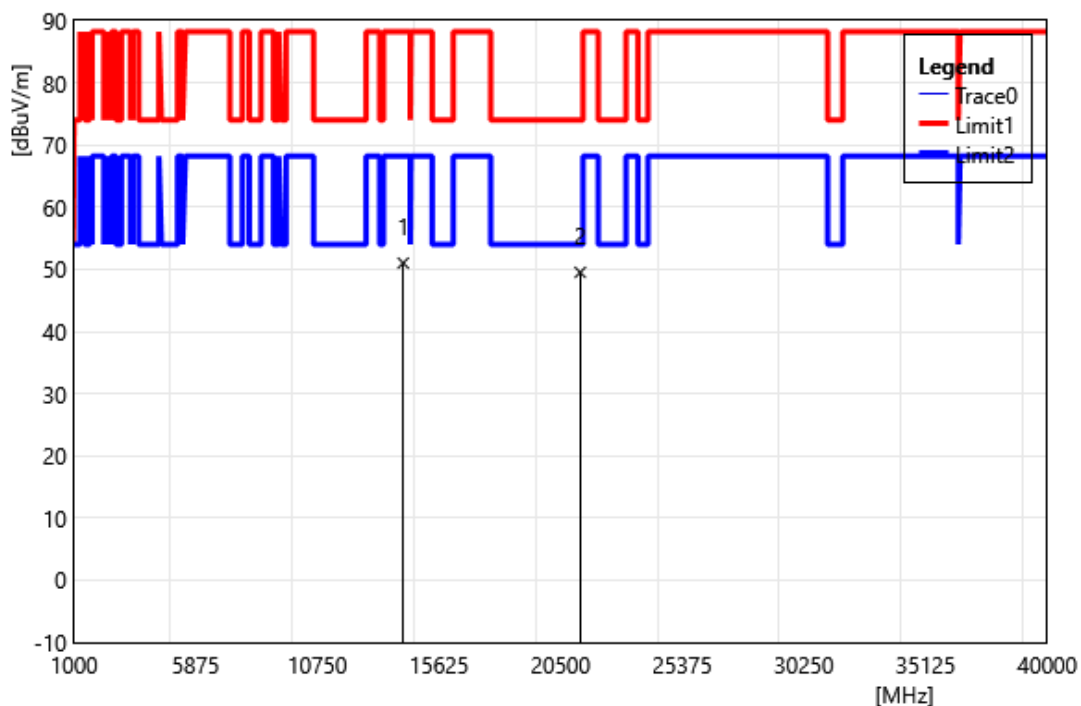


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14190.00	35.52	15.49	51.01	88.20	-37.19	PEAK
2	21285.00	33.13	16.39	49.52	74.00	-24.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

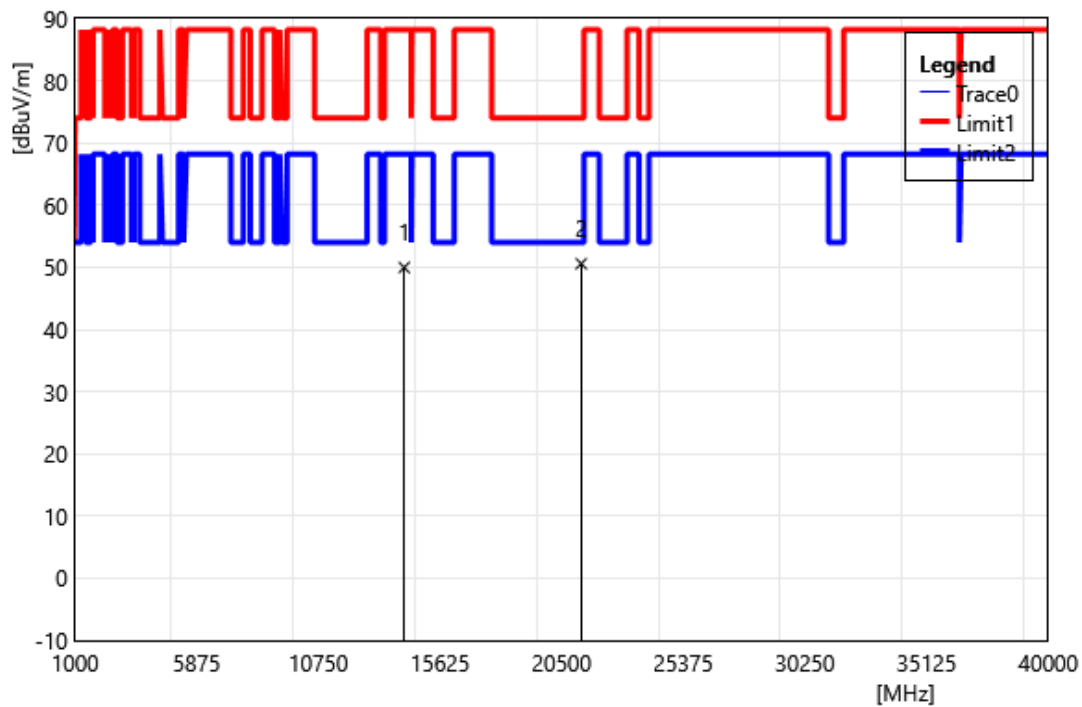


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14190.00	34.49	15.49	49.98	88.20	-38.22	PEAK
2	21285.00	34.19	16.39	50.58	74.00	-23.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

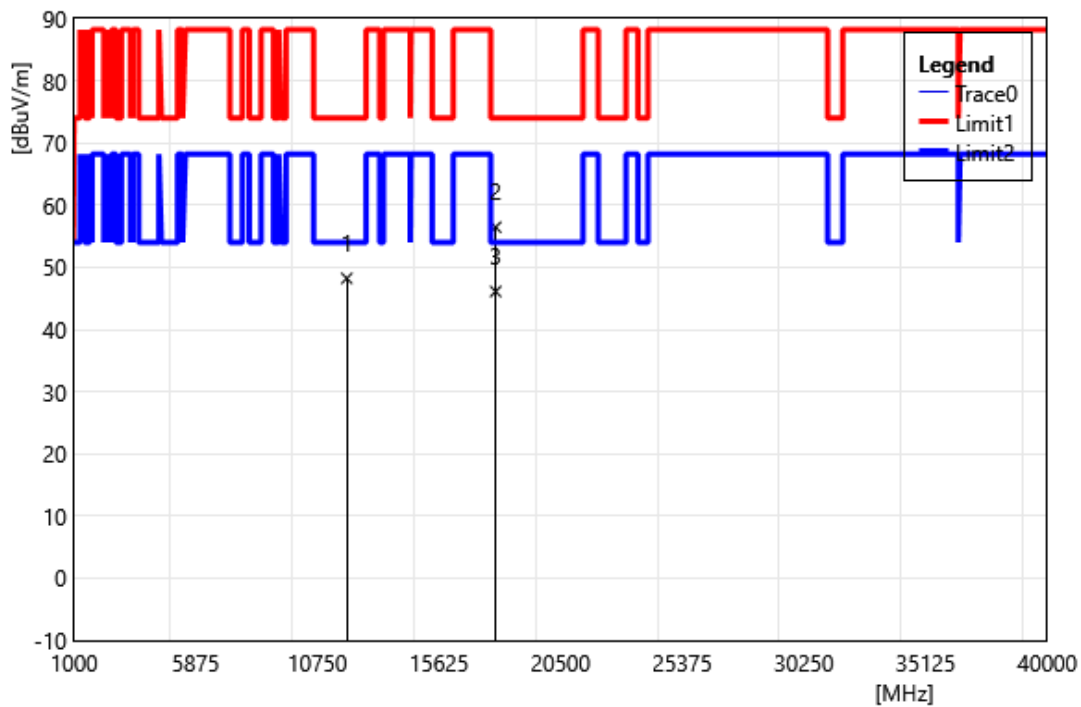


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	36.53	11.70	48.23	74.00	-25.77	PEAK
2	17895.00	31.85	24.60	56.45	74.00	-17.55	PEAK
3	17895.00	21.52	24.60	46.12	54.00	-7.88	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

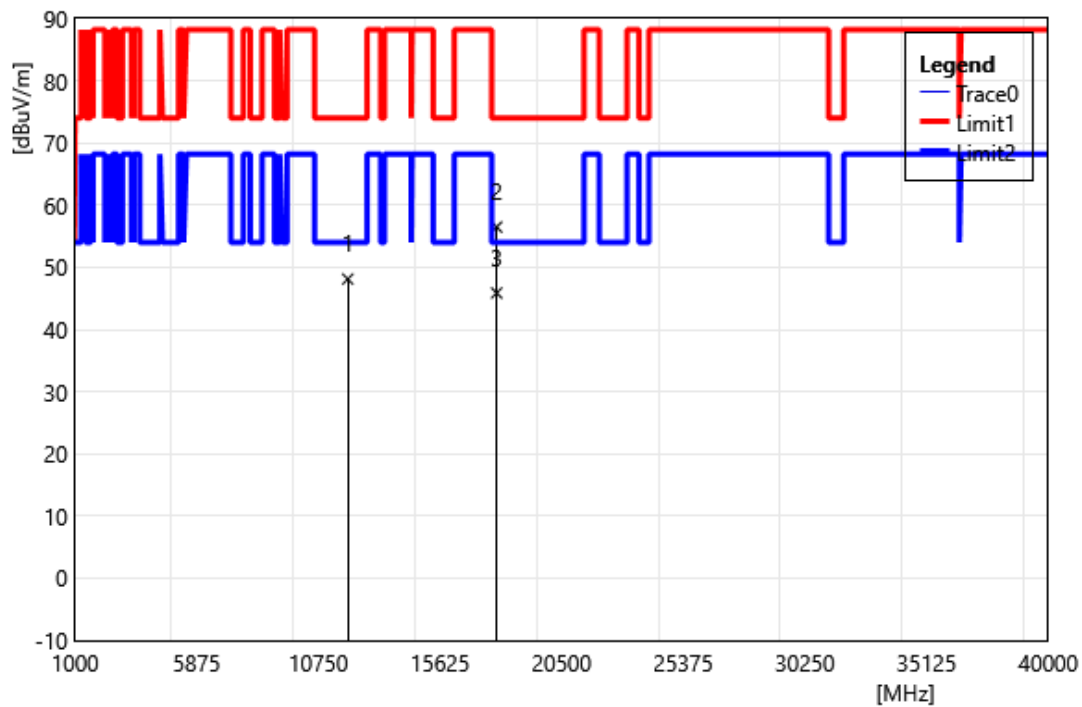


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	36.42	11.70	48.12	74.00	-25.88	PEAK
2	17895.00	31.88	24.60	56.48	74.00	-17.52	PEAK
3	17895.00	21.27	24.60	45.87	54.00	-8.13	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6165		
	MHz		
Polarization:	Vertical		
Remark:			

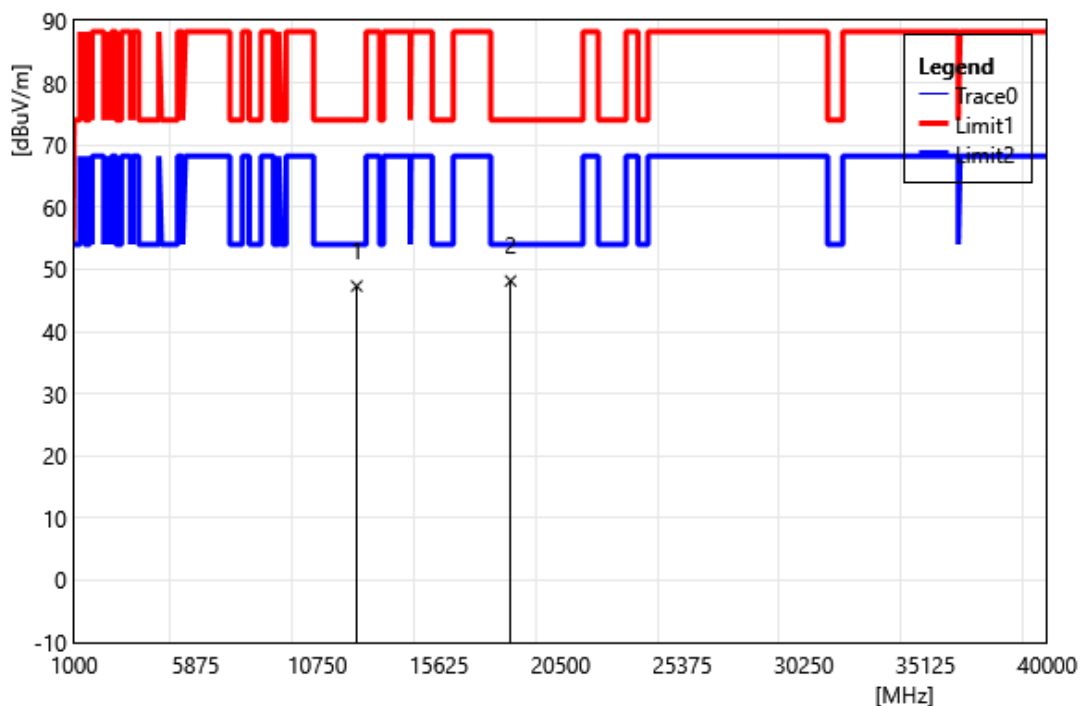


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	35.55	11.76	47.31	74.00	-26.69	PEAK
2	18495.00	32.70	15.42	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6165		
	MHz		
Polarization:	Horizontal		
Remark:			

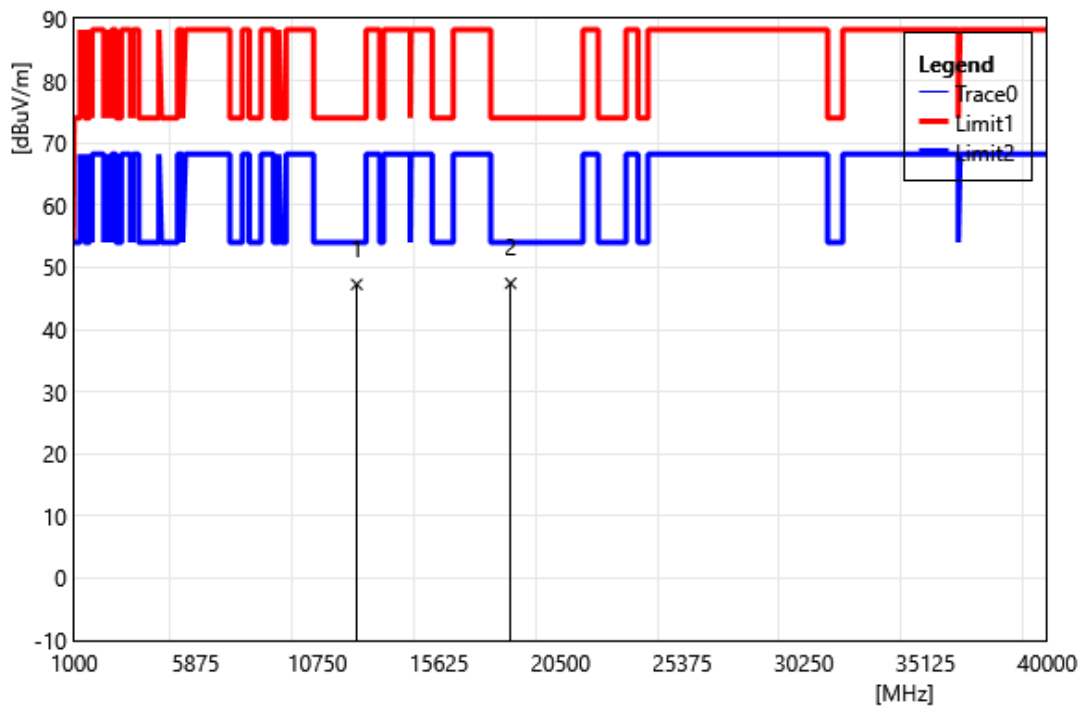


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	35.49	11.76	47.25	74.00	-26.75	PEAK
2	18495.00	32.01	15.42	47.43	74.00	-26.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6405		
	MHz		
Polarization:	Vertical		
Remark:			

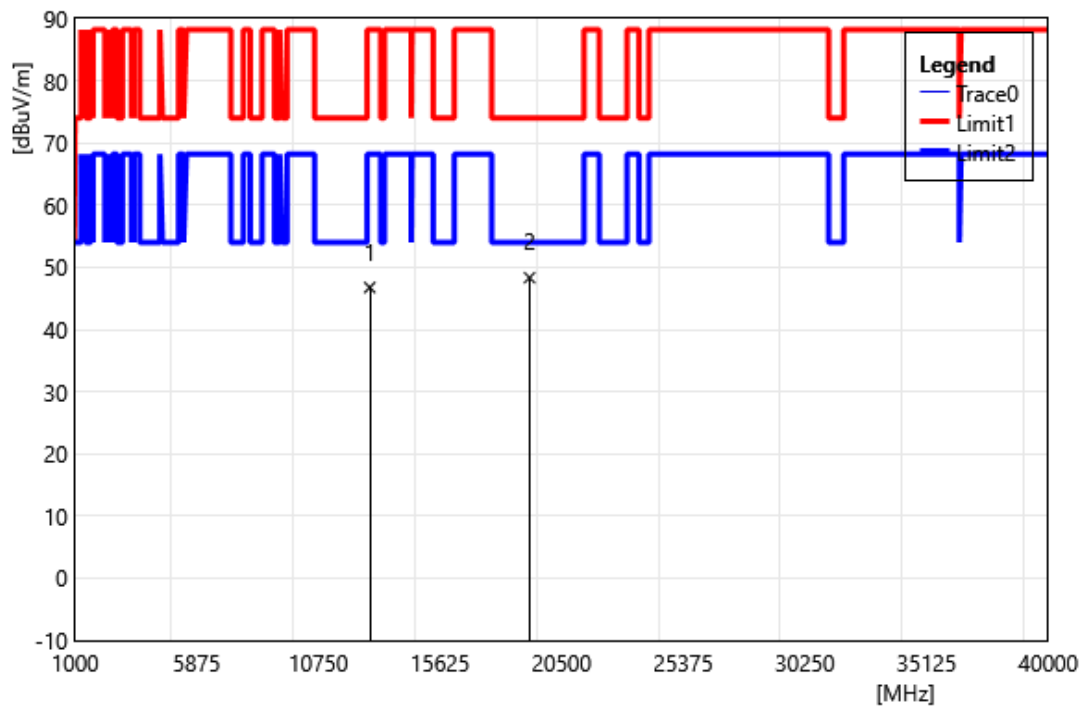


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	34.01	12.75	46.76	88.20	-41.44	PEAK
2	19215.00	32.35	15.98	48.33	74.00	-25.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6405		
	MHz		
Polarization:	Horizontal		
Remark:			

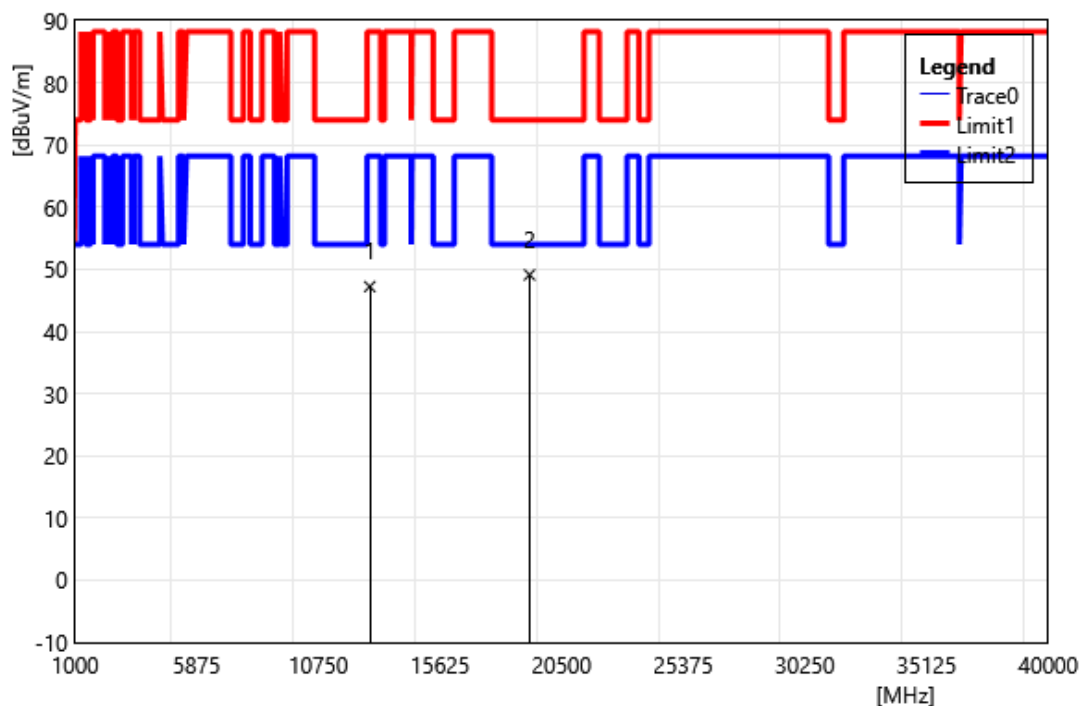


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	34.47	12.75	47.22	88.20	-40.98	PEAK
2	19215.00	33.13	15.98	49.11	74.00	-24.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6445		
	MHz		
Polarization:	Vertical		
Remark:			

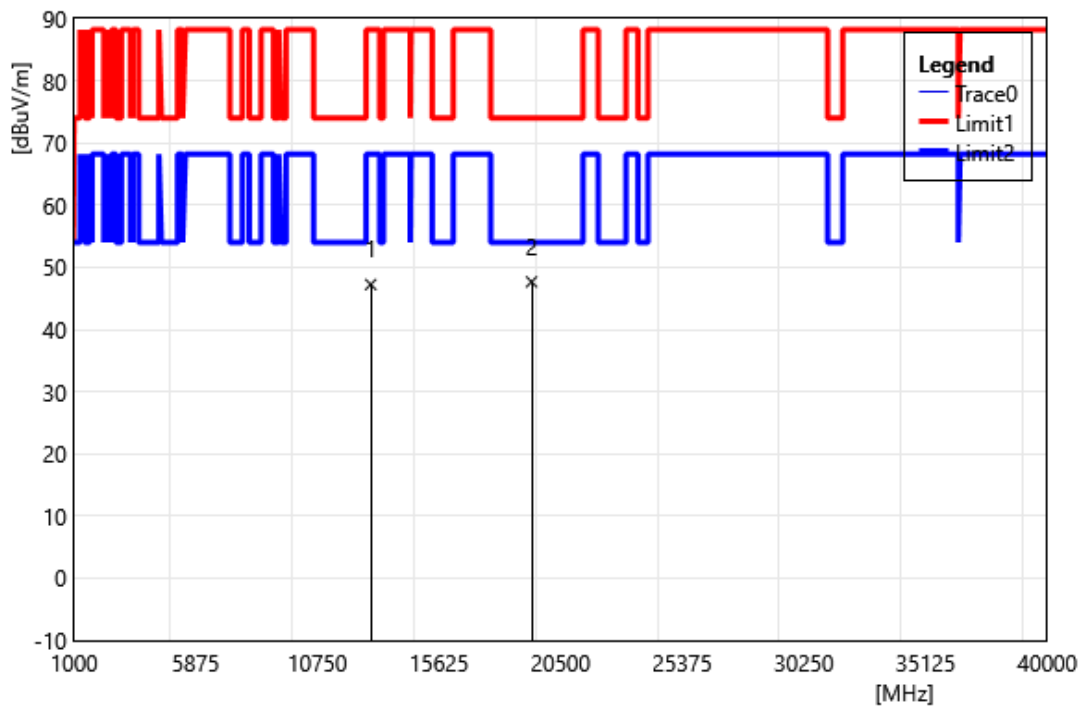


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	34.40	12.83	47.23	88.20	-40.97	PEAK
2	19335.00	31.45	16.21	47.66	74.00	-26.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6445		
	MHz		
Polarization:	Horizontal		
Remark:			

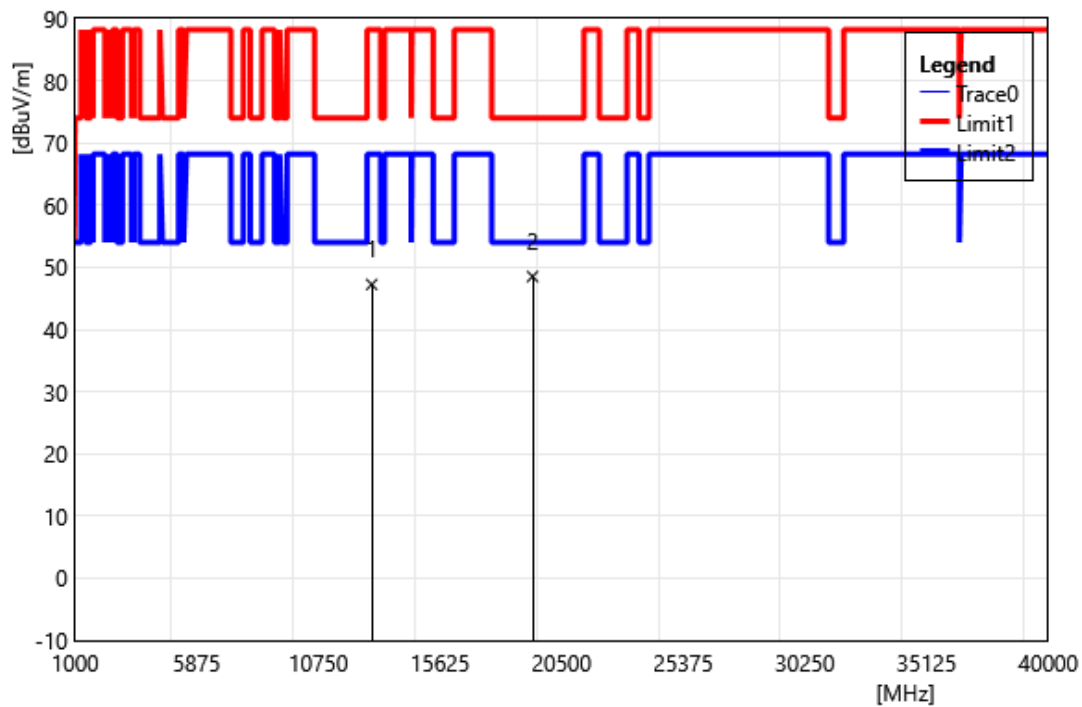


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	34.42	12.83	47.25	88.20	-40.95	PEAK
2	19335.00	32.30	16.21	48.51	74.00	-25.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6485		
	MHz		
Polarization:	Vertical		
Remark:			

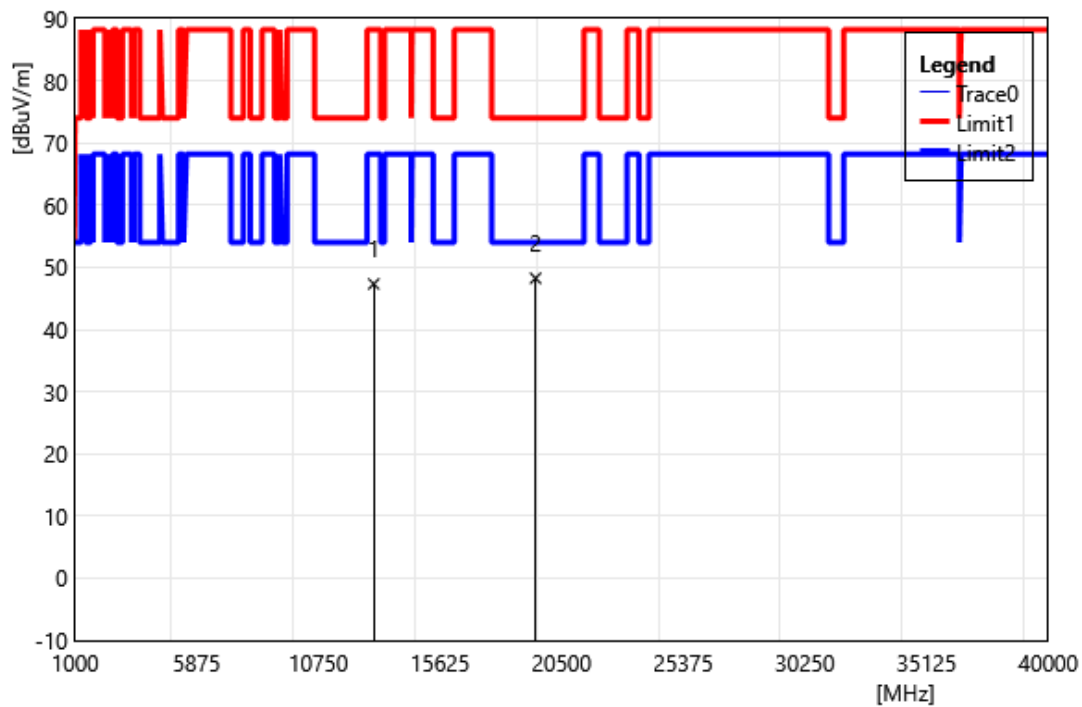


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	34.35	12.98	47.33	88.20	-40.87	PEAK
2	19455.00	31.81	16.44	48.25	74.00	-25.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6485		
	MHz		
Polarization:	Horizontal		
Remark:			

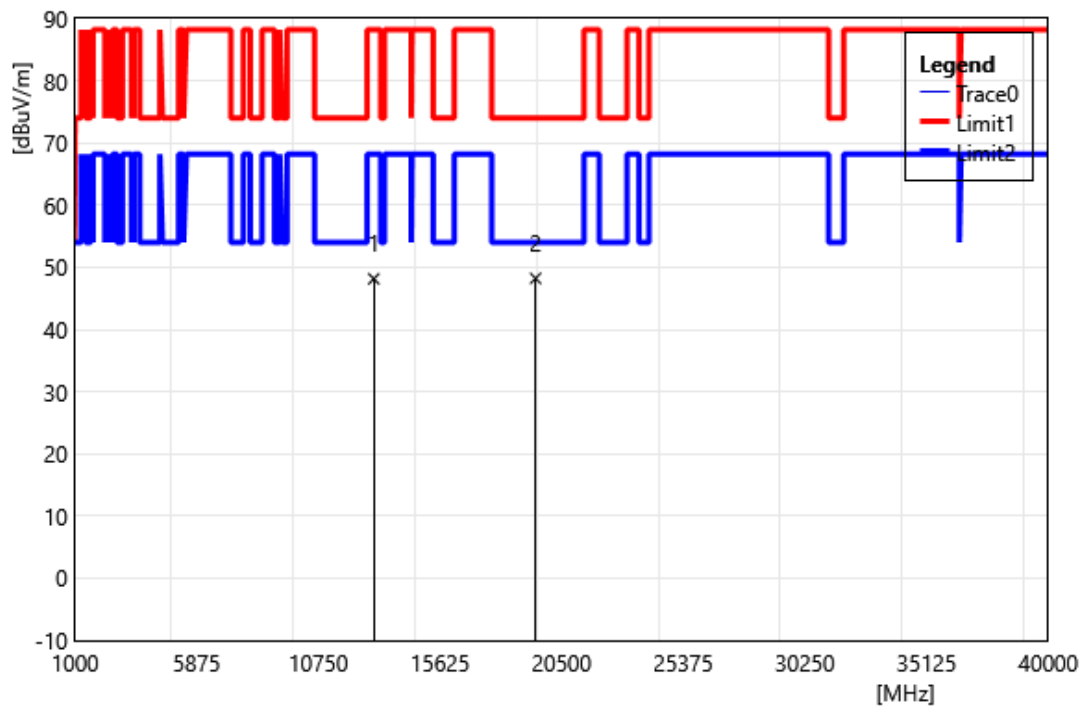


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	35.17	12.98	48.15	88.20	-40.05	PEAK
2	19455.00	31.79	16.44	48.23	74.00	-25.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6525		
	MHz		
Polarization:	Vertical		
Remark:			

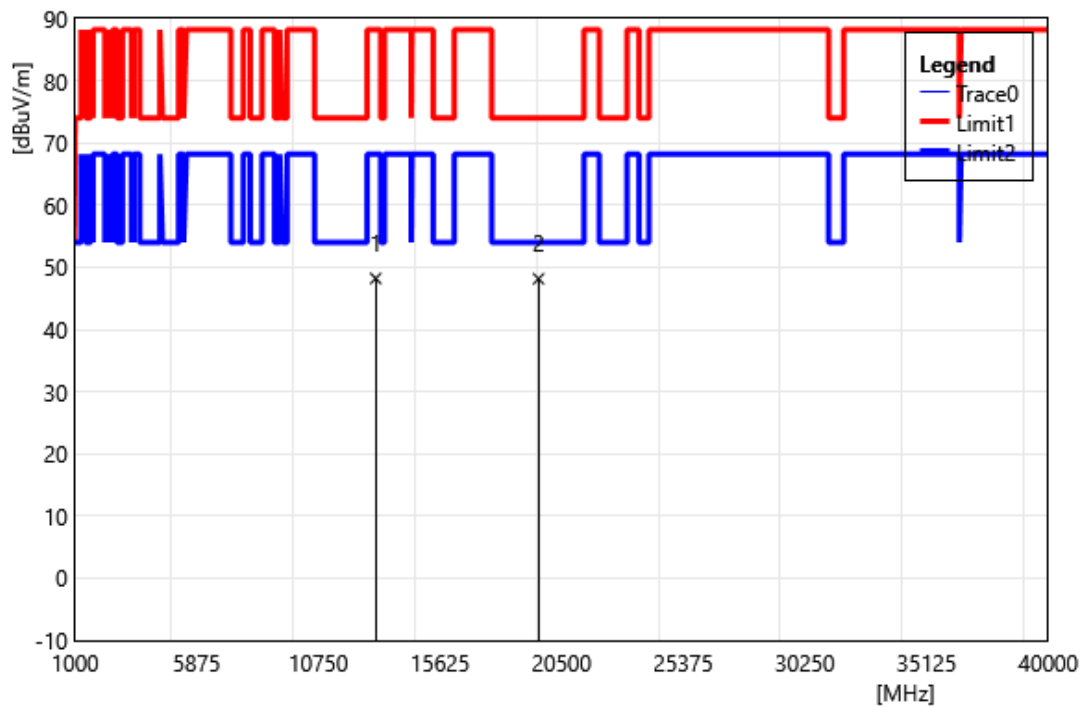


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	35.22	12.99	48.21	88.20	-39.99	PEAK
2	19575.00	32.27	15.89	48.16	74.00	-25.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6525		
	MHz		
Polarization:	Horizontal		
Remark:			

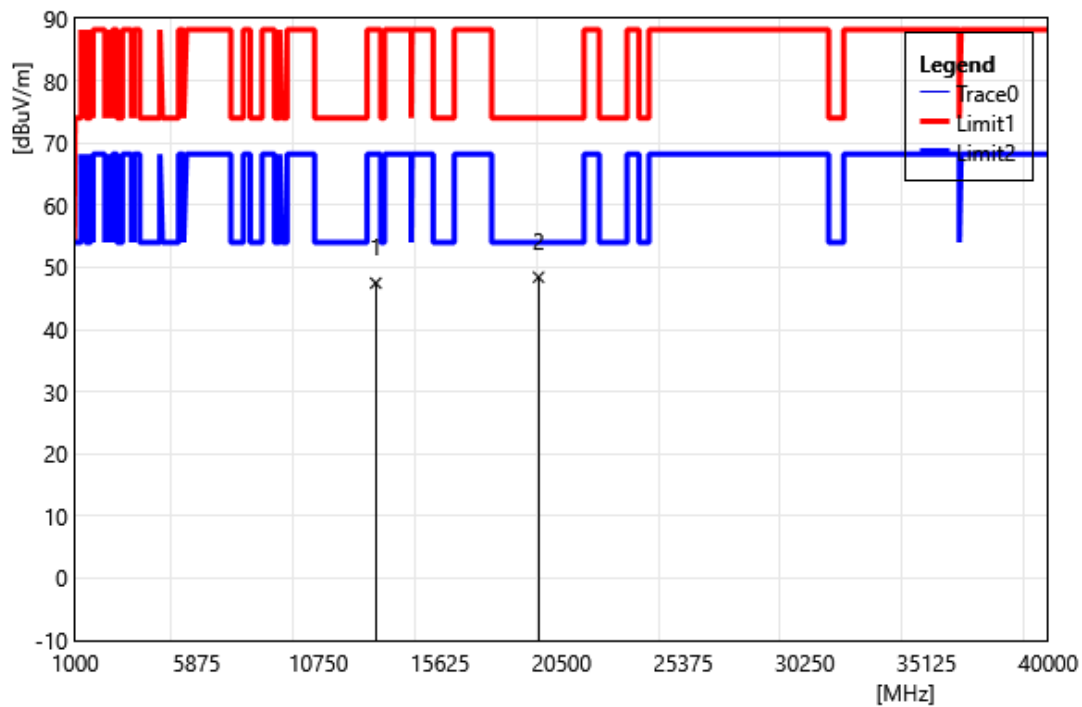


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	34.48	12.99	47.47	88.20	-40.73	PEAK
2	19575.00	32.53	15.89	48.42	74.00	-25.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6565		
	MHz		
Polarization:	Vertical		
Remark:			

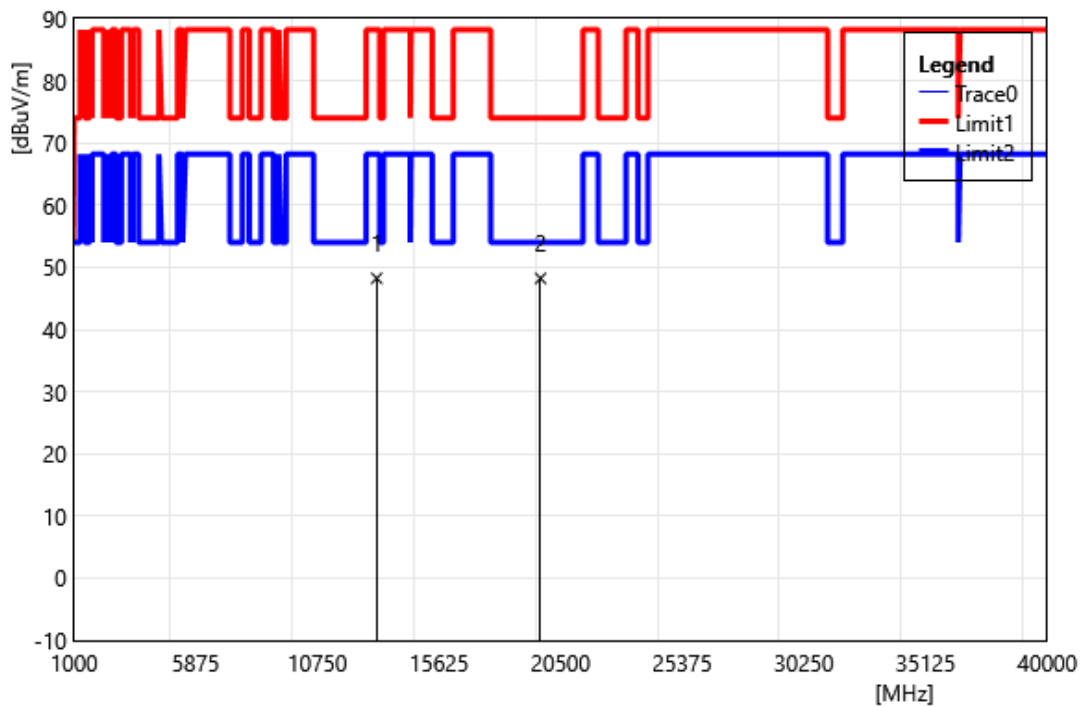


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	35.23	13.00	48.23	88.20	-39.97	PEAK
2	19695.00	32.15	16.07	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6565		
	MHz		
Polarization:	Horizontal		
Remark:			

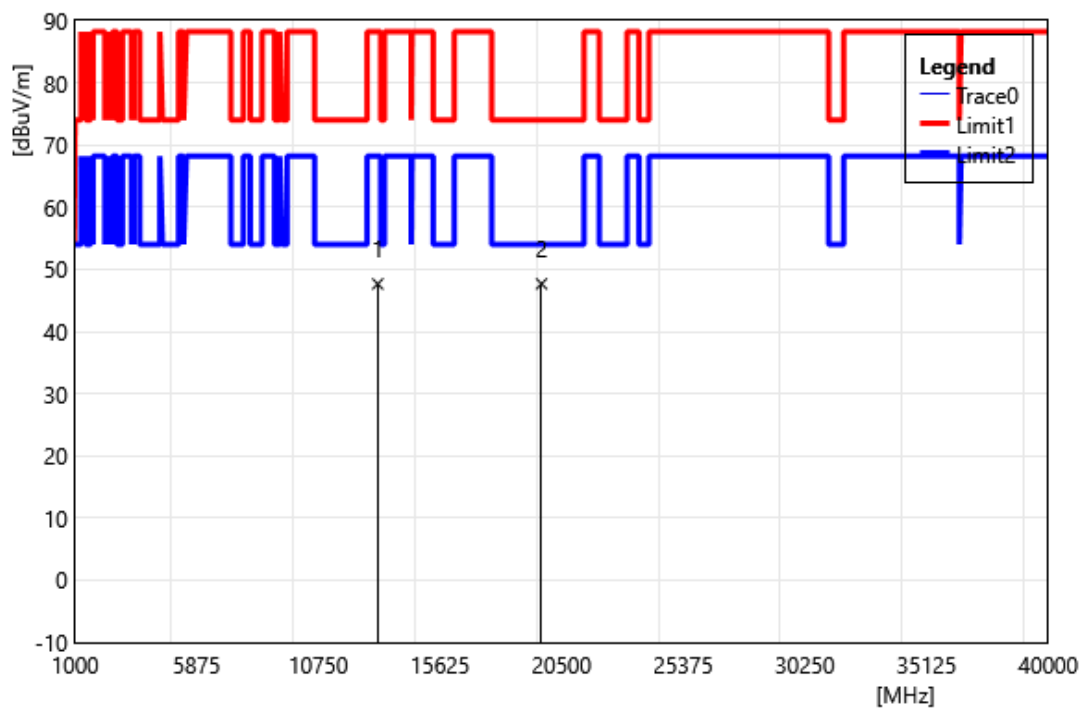


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	34.65	13.00	47.65	88.20	-40.55	PEAK
2	19695.00	31.59	16.07	47.66	74.00	-26.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6685		
	MHz		
Polarization:	Vertical		
Remark:			

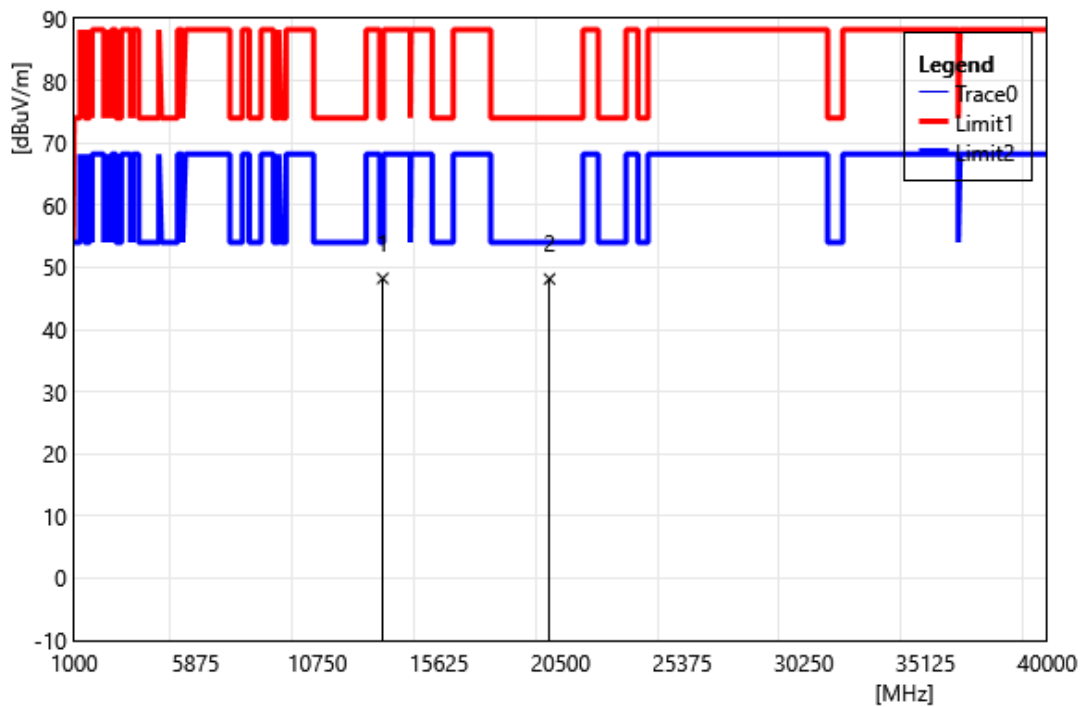


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	34.54	13.68	48.22	74.00	-25.78	PEAK
2	20055.00	31.94	16.18	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6685		
	MHz		
Polarization:	Horizontal		
Remark:			

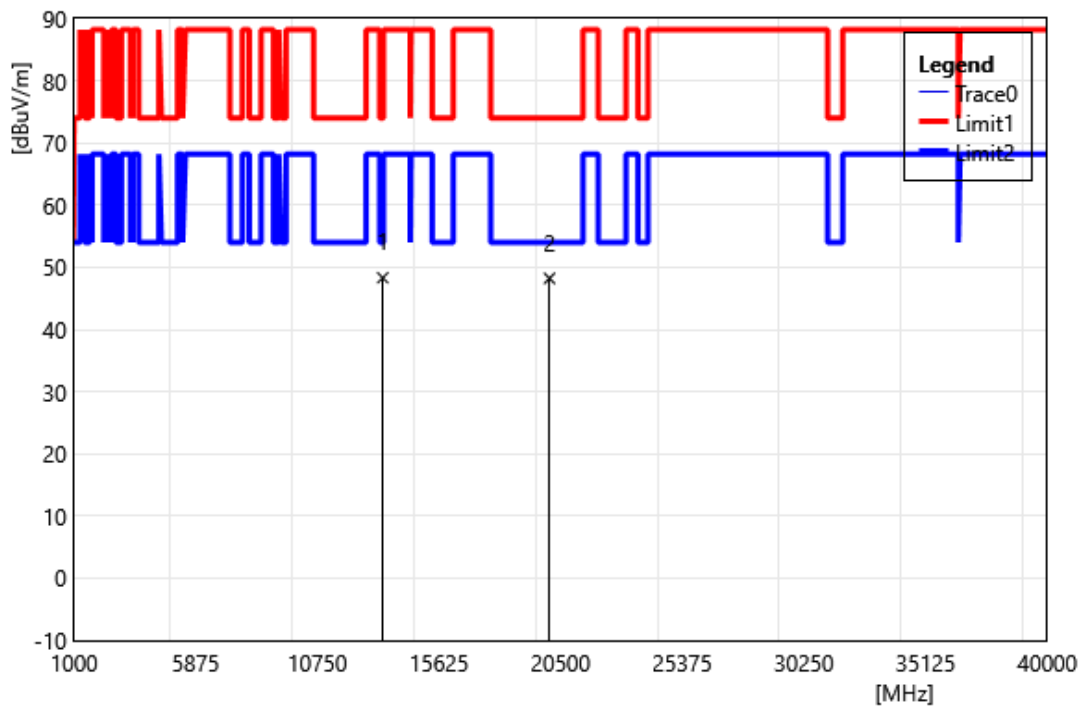


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	34.65	13.68	48.33	74.00	-25.67	PEAK
2	20055.00	32.05	16.18	48.23	74.00	-25.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6845		
	MHz		
Polarization:	Vertical		
Remark:			

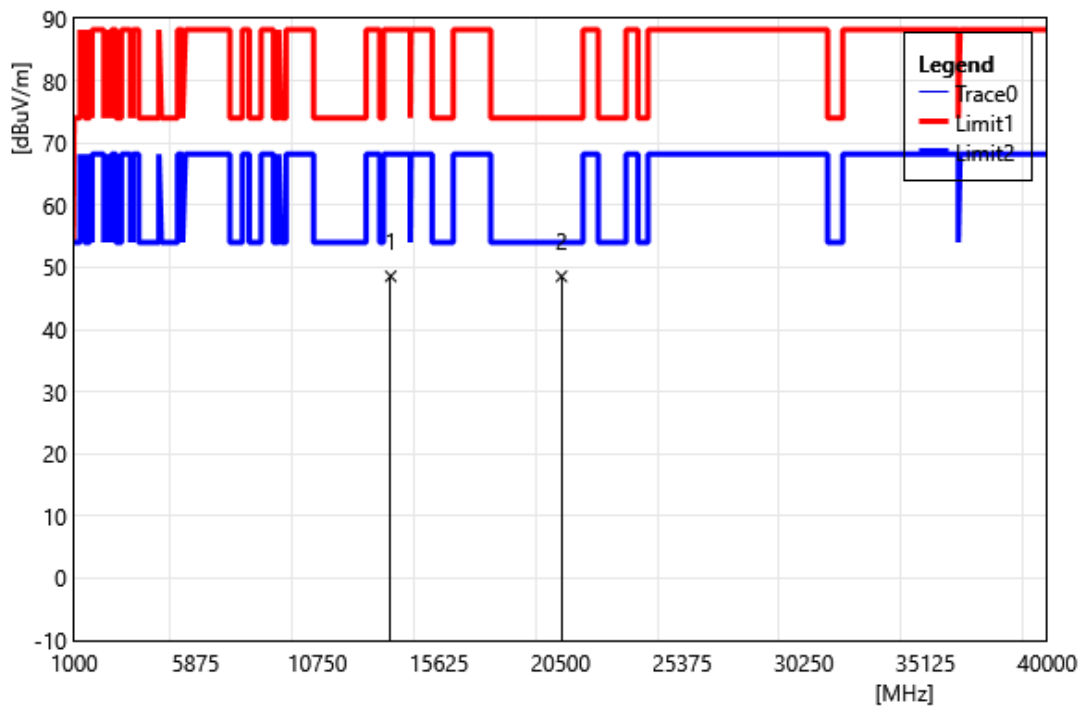


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	33.98	14.58	48.56	88.20	-39.64	PEAK
2	20535.00	31.99	16.55	48.54	74.00	-25.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6845		
	MHz		
Polarization:	Horizontal		
Remark:			

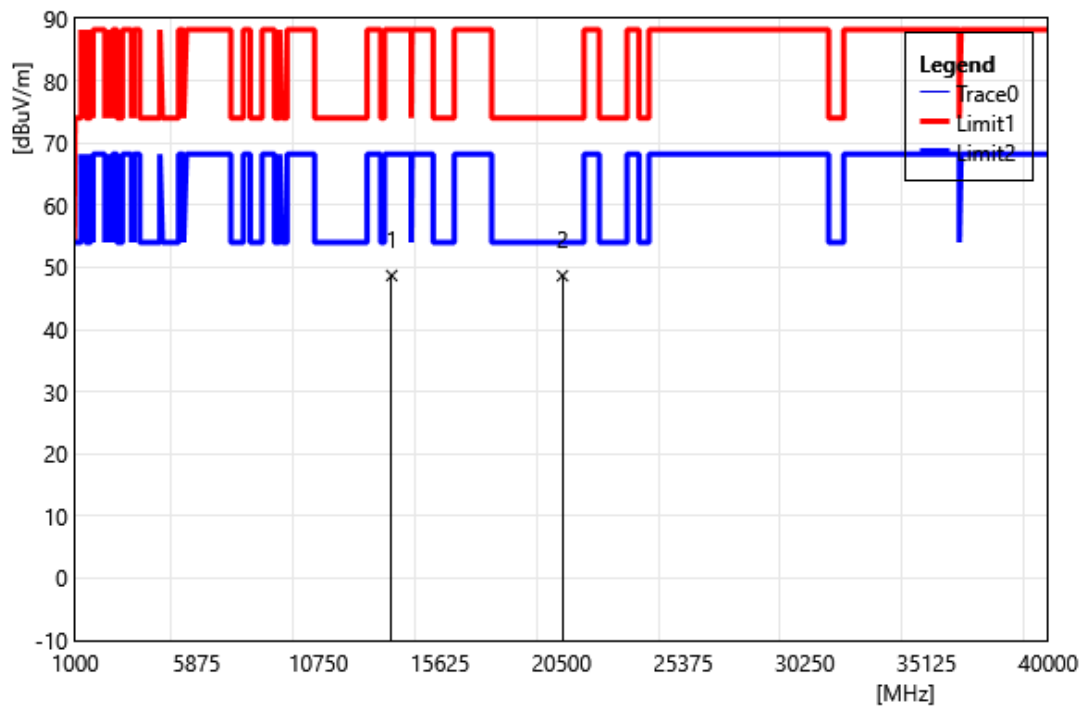


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	34.11	14.58	48.69	88.20	-39.51	PEAK
2	20535.00	32.10	16.55	48.65	74.00	-25.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6885		
	MHz		
Polarization:	Vertical		
Remark:			

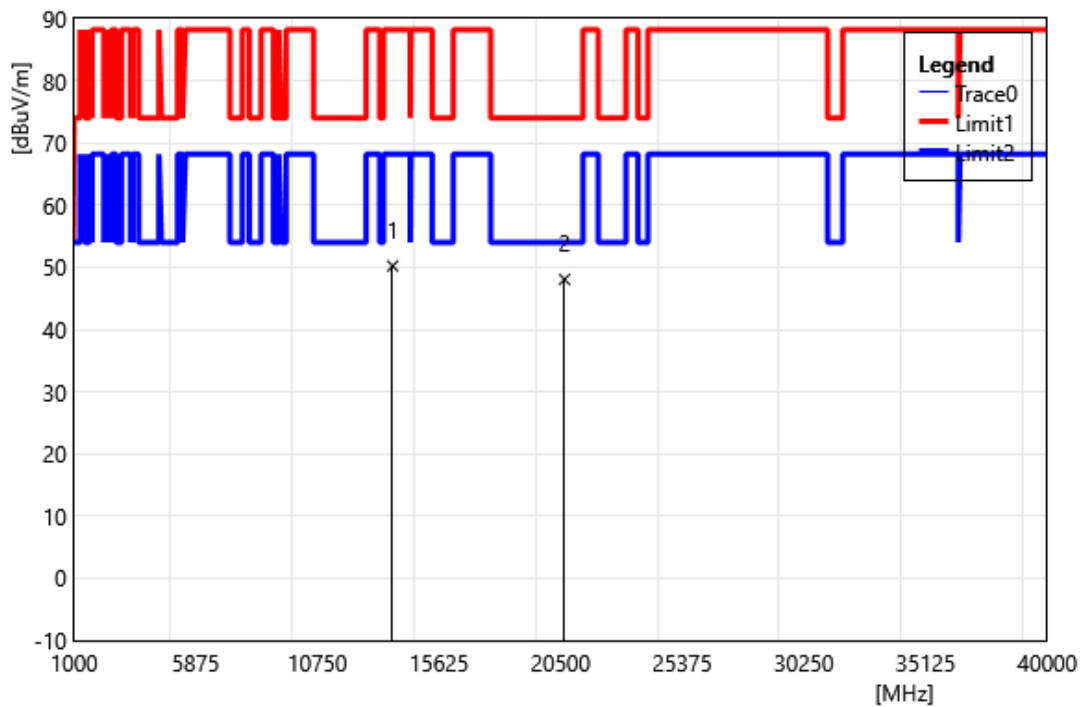


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	35.84	14.38	50.22	88.20	-37.98	PEAK
2	20655.00	31.35	16.70	48.05	74.00	-25.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6885		
	MHz		
Polarization:	Horizontal		
Remark:			

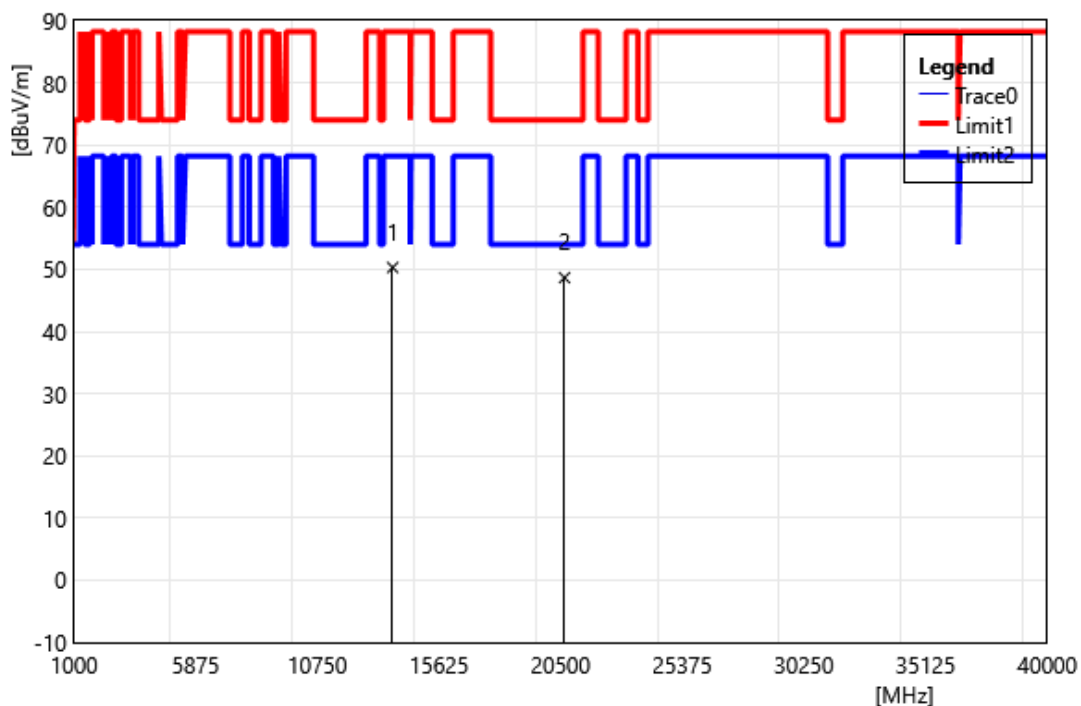


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	35.92	14.38	50.30	88.20	-37.90	PEAK
2	20655.00	31.96	16.70	48.66	74.00	-25.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6925		
	MHz		
Polarization:	Vertical		
Remark:			

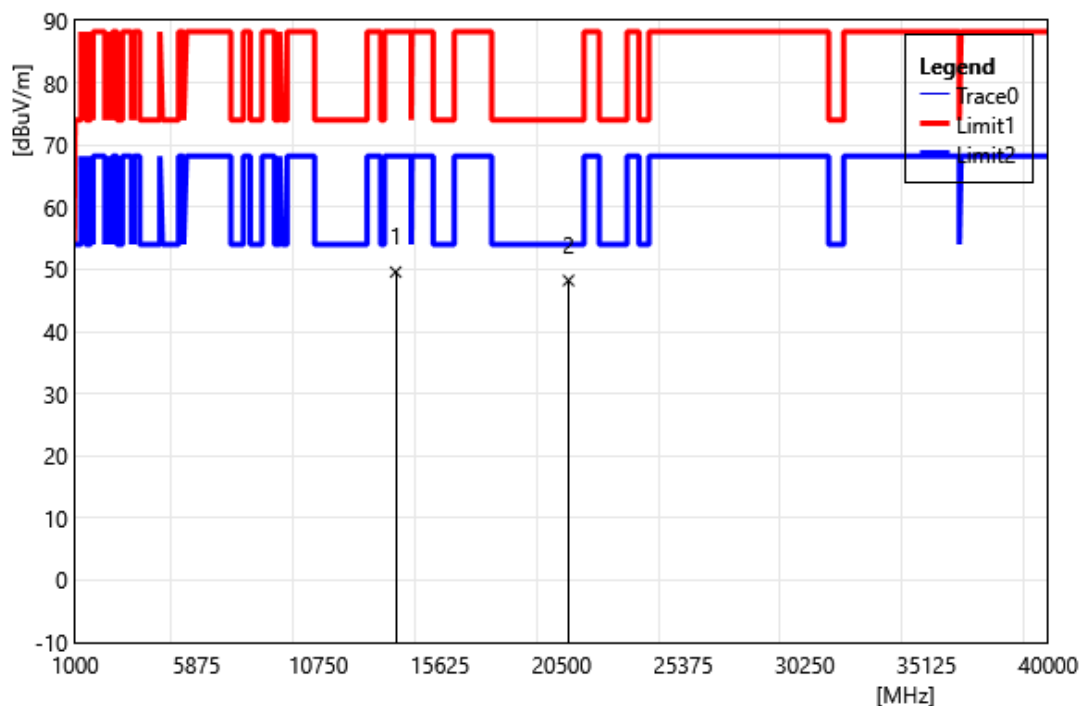


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	34.99	14.57	49.56	88.20	-38.64	PEAK
2	20775.00	31.36	16.85	48.21	74.00	-25.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6925		
	MHz		
Polarization:	Horizontal		
Remark:			

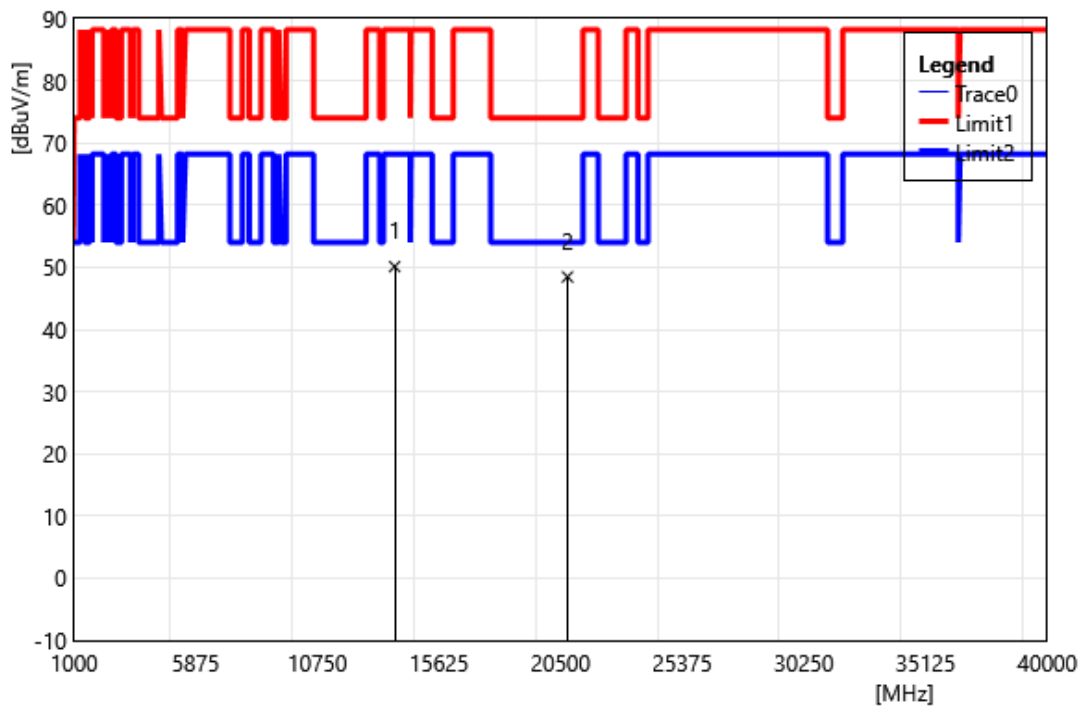


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	35.54	14.57	50.11	88.20	-38.09	PEAK
2	20775.00	31.61	16.85	48.46	74.00	-25.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7005		
	MHz		
Polarization:	Vertical		
Remark:			

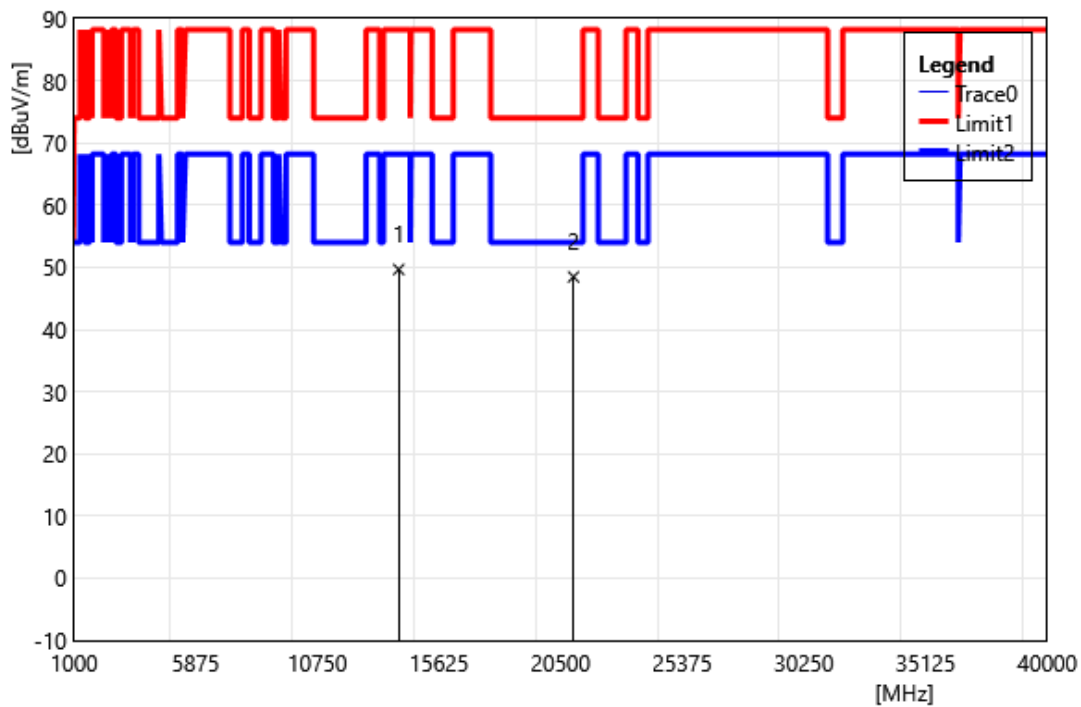


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	34.74	14.92	49.66	88.20	-38.54	PEAK
2	21015.00	32.35	16.12	48.47	74.00	-25.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7005		
	MHz		
Polarization:	Horizontal		
Remark:			

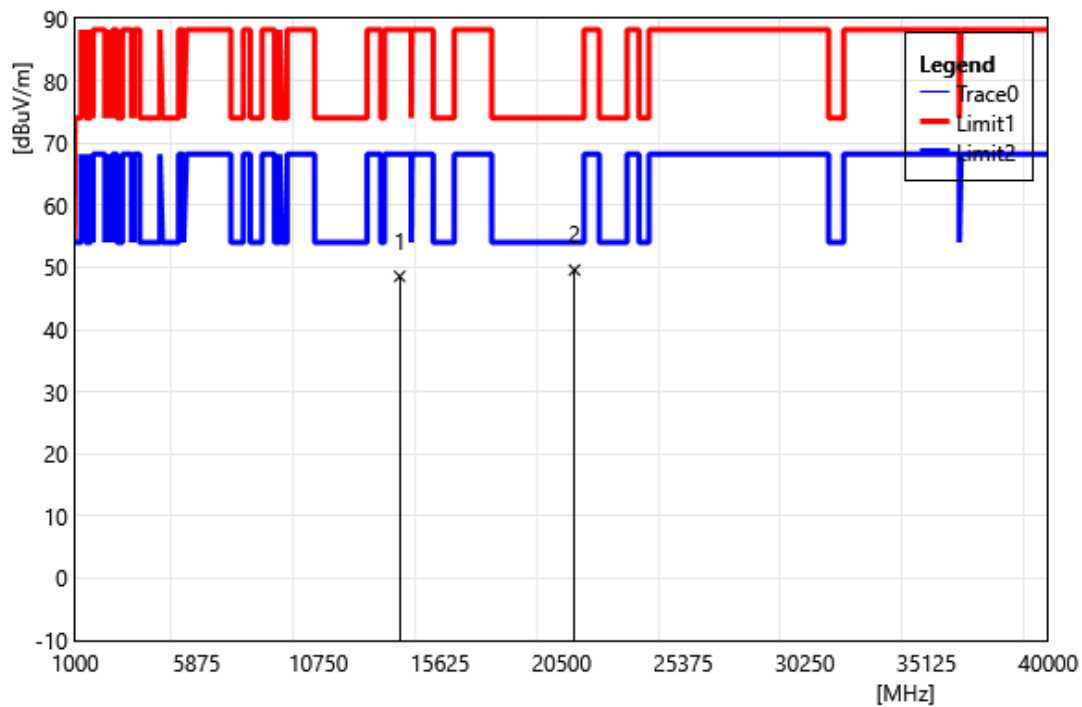


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	33.63	14.92	48.55	88.20	-39.65	PEAK
2	21015.00	33.44	16.12	49.56	74.00	-24.44	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

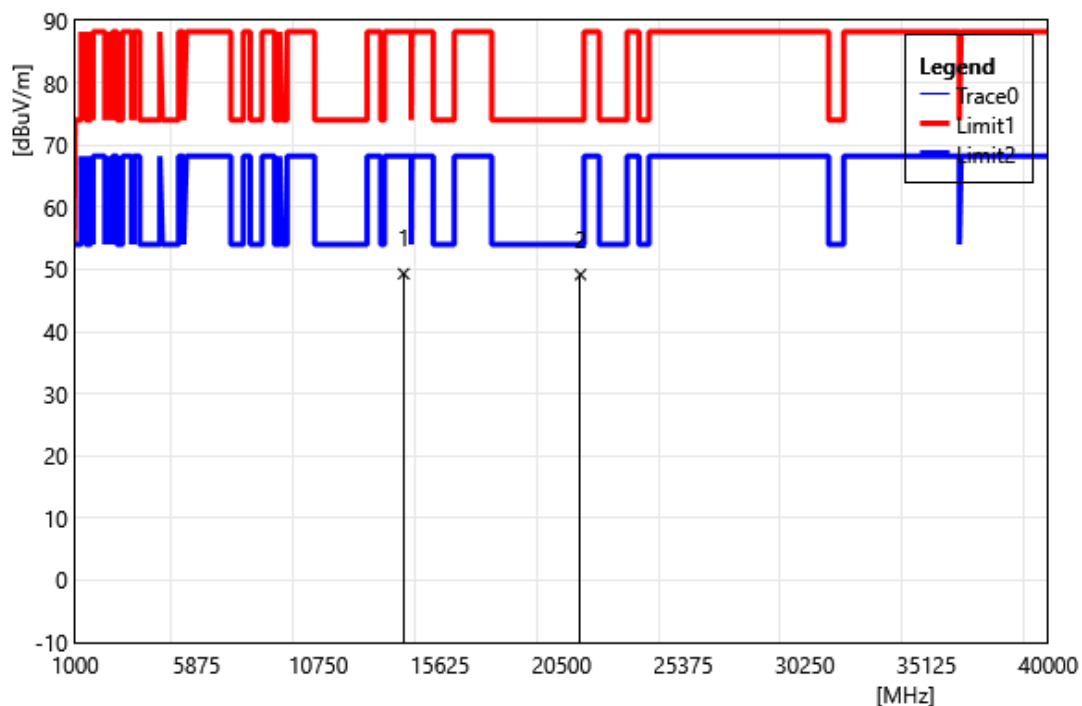


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	33.79	15.51	49.30	88.20	-38.90	PEAK
2	21255.00	32.79	16.36	49.15	74.00	-24.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

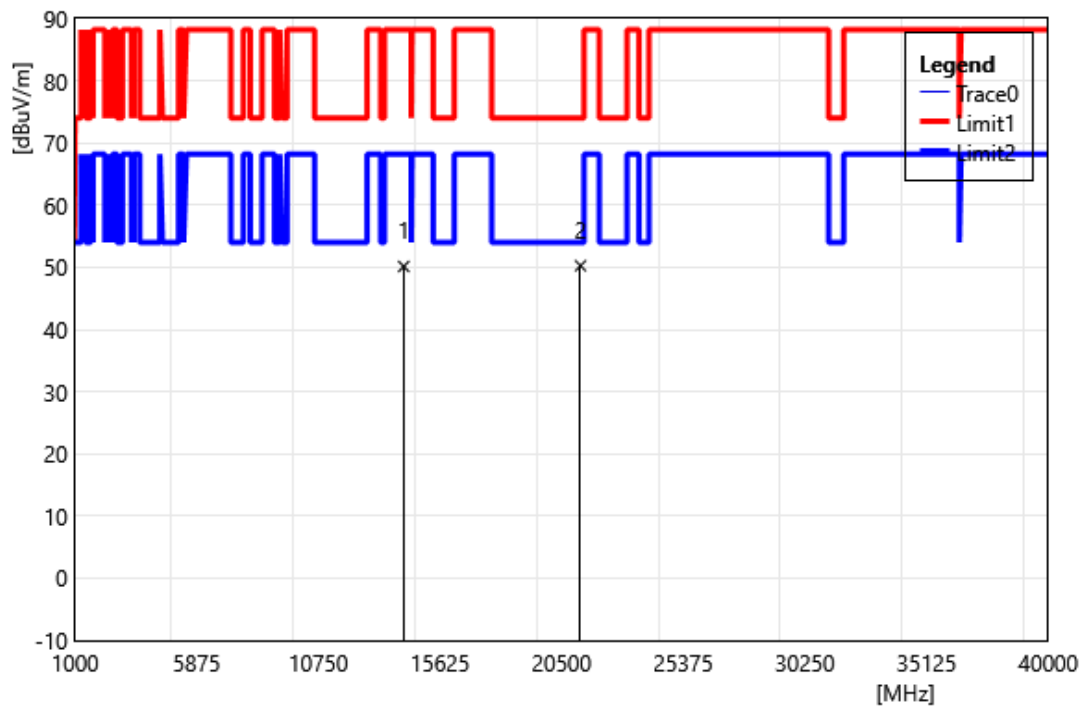


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	34.63	15.51	50.14	88.20	-38.06	PEAK
2	21255.00	33.90	16.36	50.26	74.00	-23.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

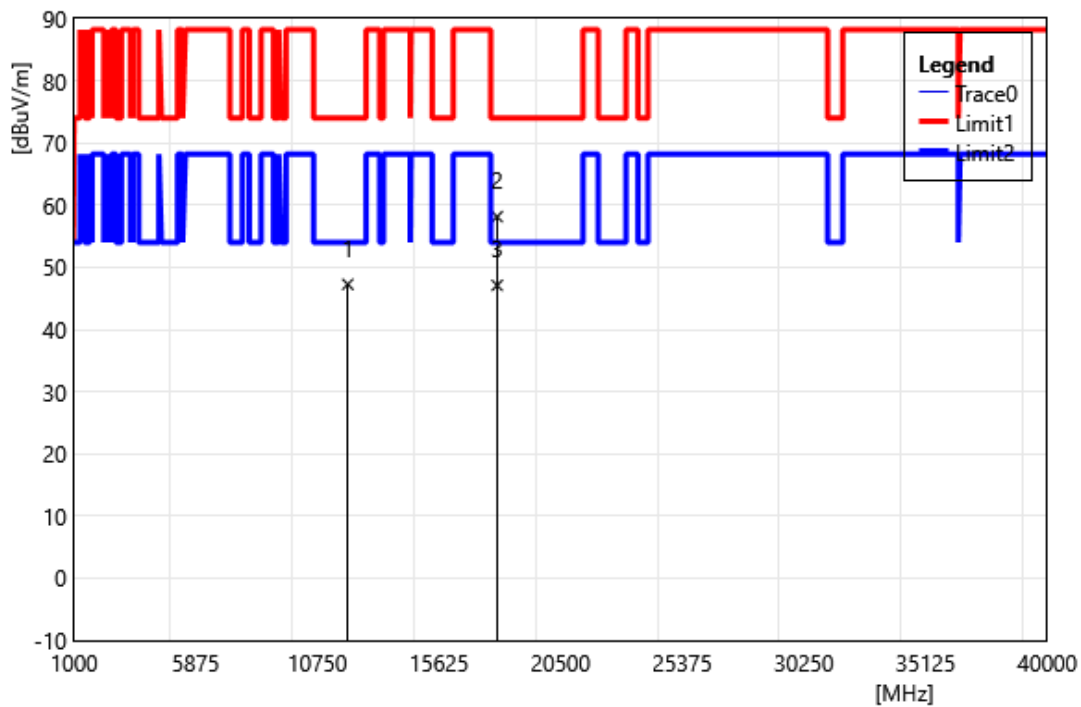


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	35.47	11.79	47.26	74.00	-26.74	PEAK
2	17955.00	32.61	25.54	58.15	74.00	-15.85	PEAK
3	17955.00	21.56	25.54	47.10	54.00	-6.90	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

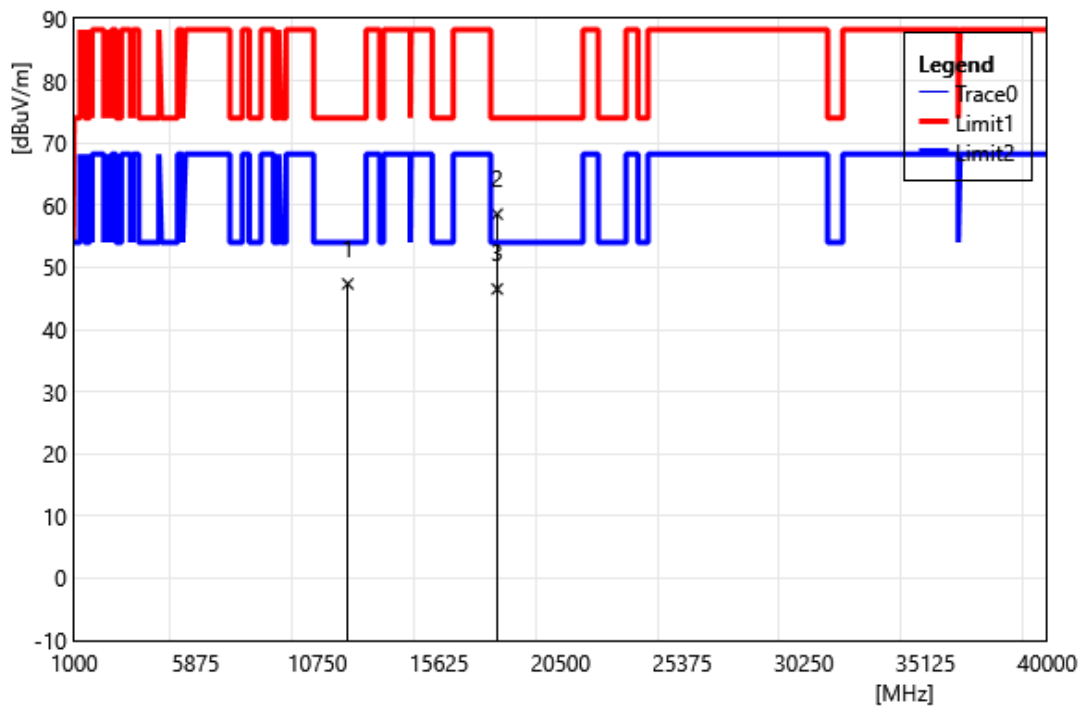


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	35.55	11.79	47.34	74.00	-26.66	PEAK
2	17955.00	33.01	25.54	58.55	74.00	-15.45	PEAK
3	17955.00	20.98	25.54	46.52	54.00	-7.48	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6145		
	MHz		
Polarization:	Vertical		
Remark:			

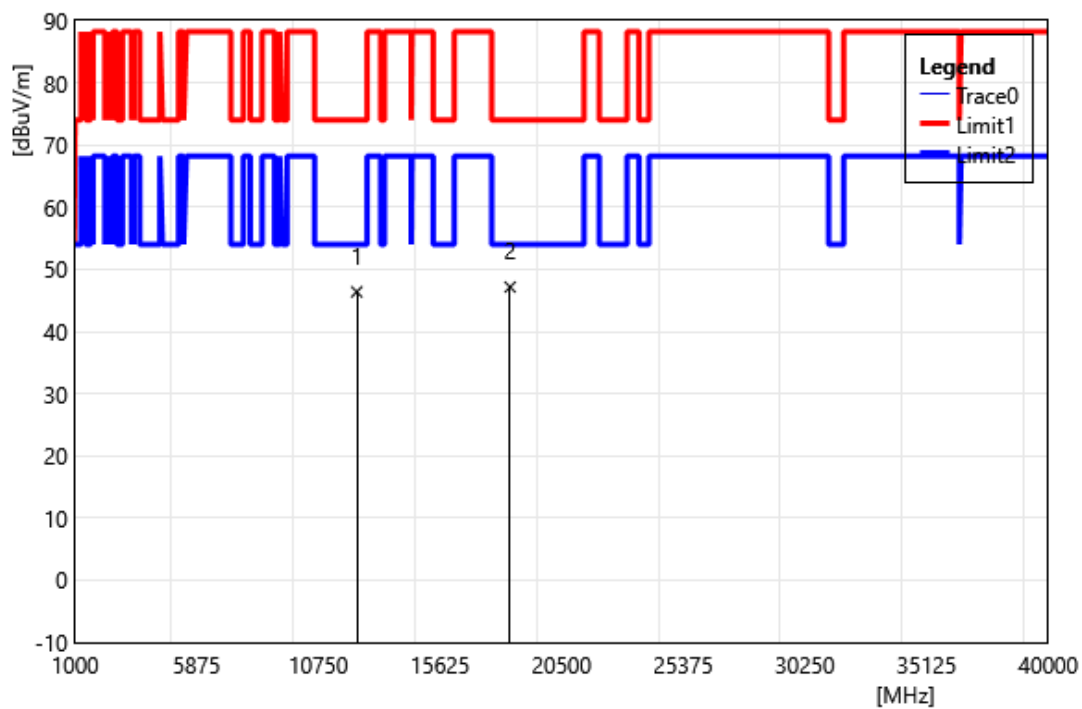


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	34.53	11.84	46.37	74.00	-27.63	PEAK
2	18435.00	31.89	15.26	47.15	74.00	-26.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6145		
	MHz		
Polarization:	Horizontal		
Remark:			

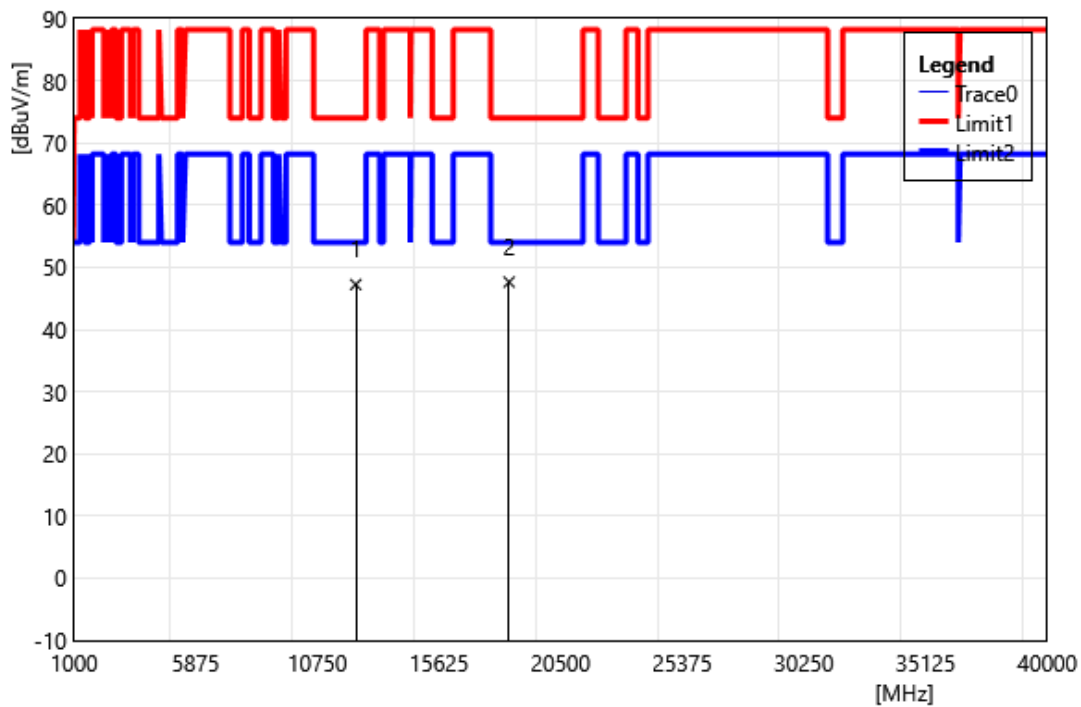


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	35.39	11.84	47.23	74.00	-26.77	PEAK
2	18435.00	32.38	15.26	47.64	74.00	-26.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6385		
	MHz		
Polarization:	Vertical		
Remark:			

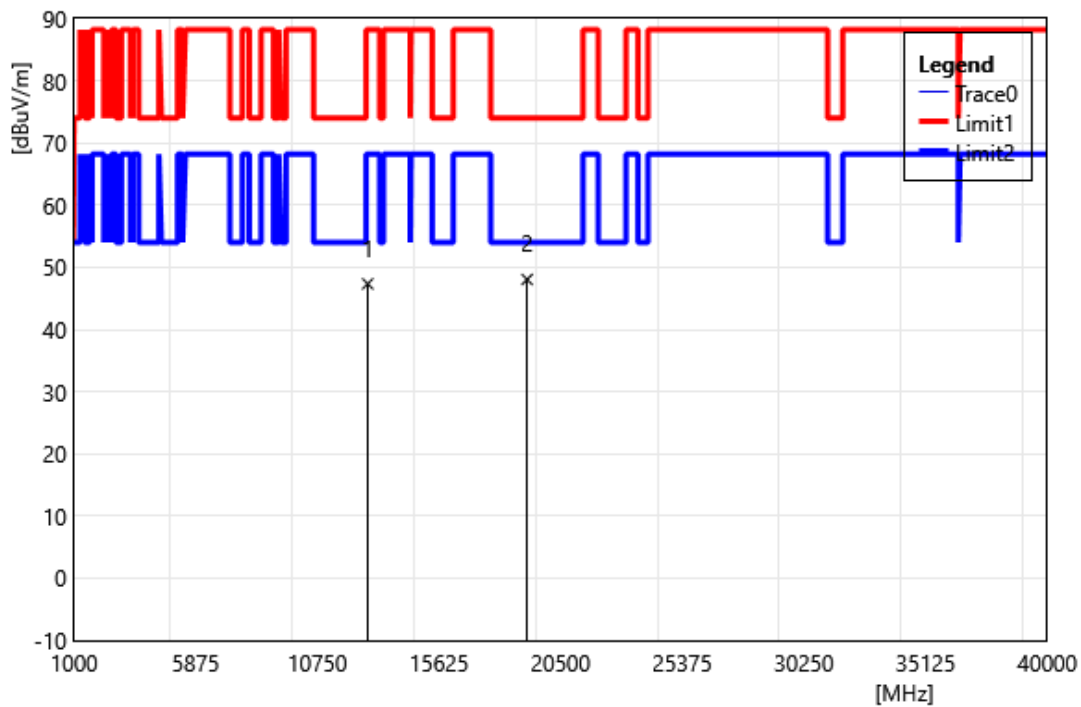


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	34.76	12.59	47.35	88.20	-40.85	PEAK
2	19155.00	32.18	15.87	48.05	74.00	-25.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6385		
	MHz		
Polarization:	Horizontal		
Remark:			

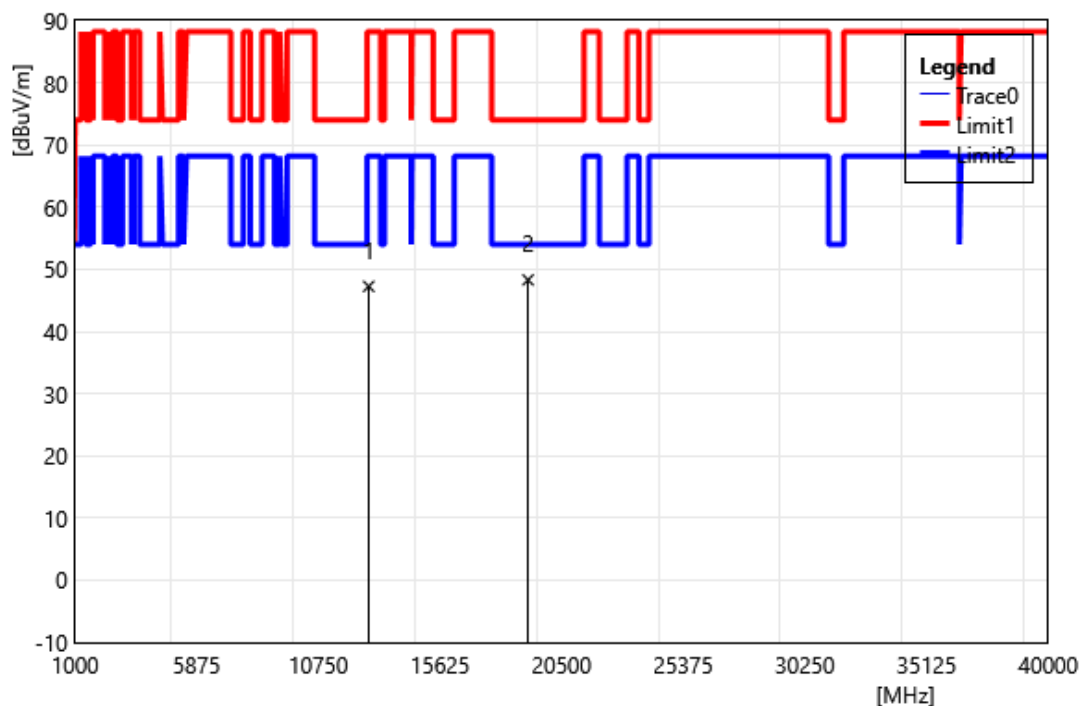


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	34.67	12.59	47.26	88.20	-40.94	PEAK
2	19155.00	32.43	15.87	48.30	74.00	-25.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6465		
	MHz		
Polarization:	Vertical		
Remark:			

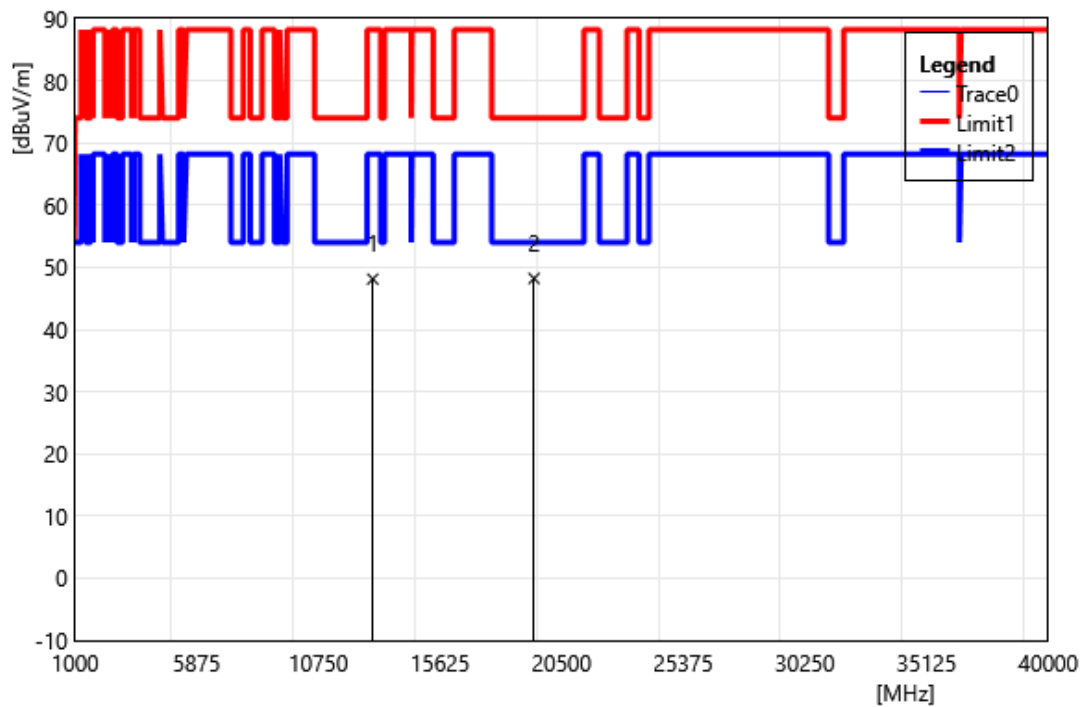


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	35.21	12.90	48.11	88.20	-40.09	PEAK
2	19395.00	31.90	16.32	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6465		
	MHz		
Polarization:	Horizontal		
Remark:			

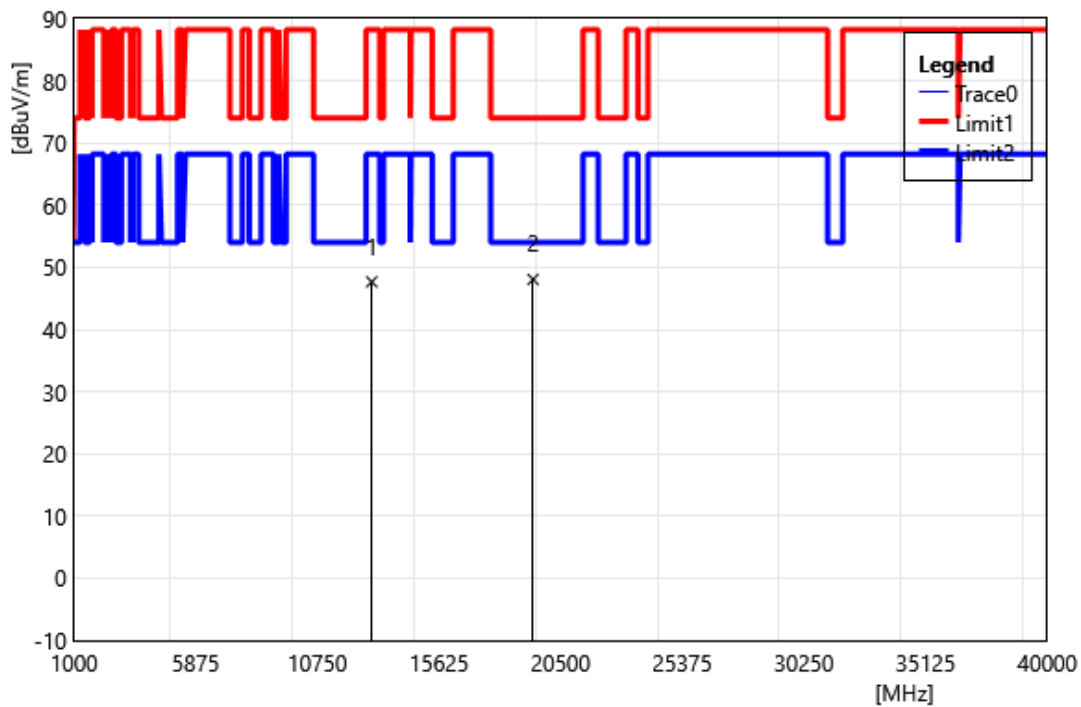


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	34.76	12.90	47.66	88.20	-40.54	PEAK
2	19395.00	31.73	16.32	48.05	74.00	-25.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6545		
	MHz		
Polarization:	Vertical		
Remark:			

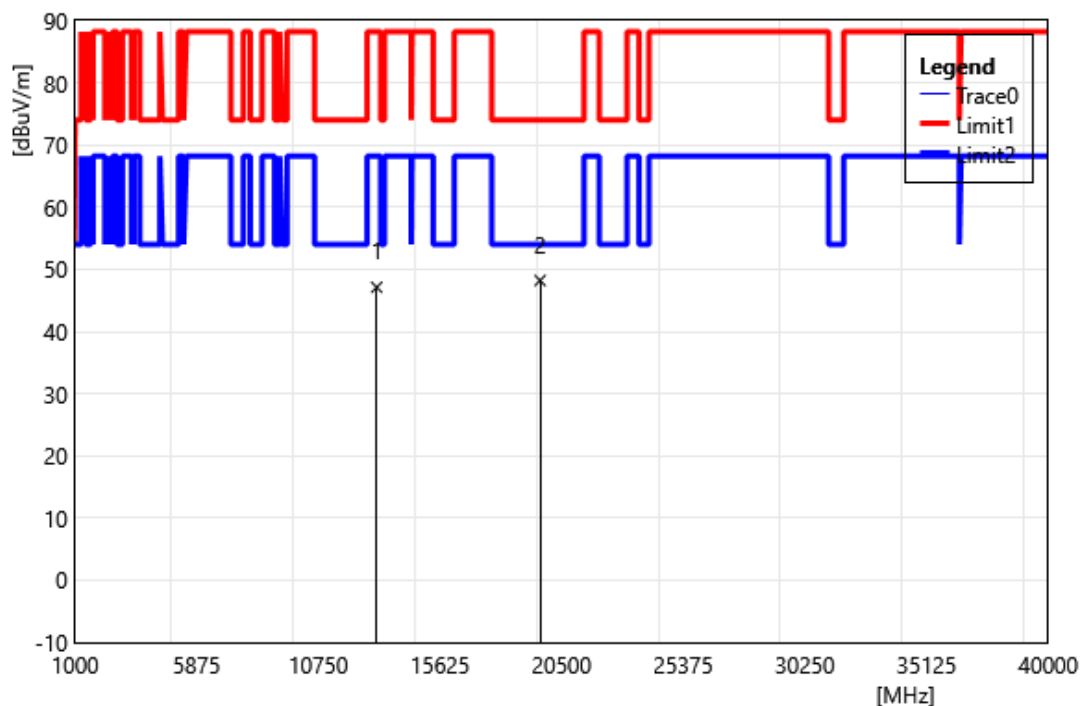


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	34.17	12.95	47.12	88.20	-41.08	PEAK
2	19635.00	32.23	15.98	48.21	74.00	-25.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6545		
	MHz		
Polarization:	Horizontal		
Remark:			

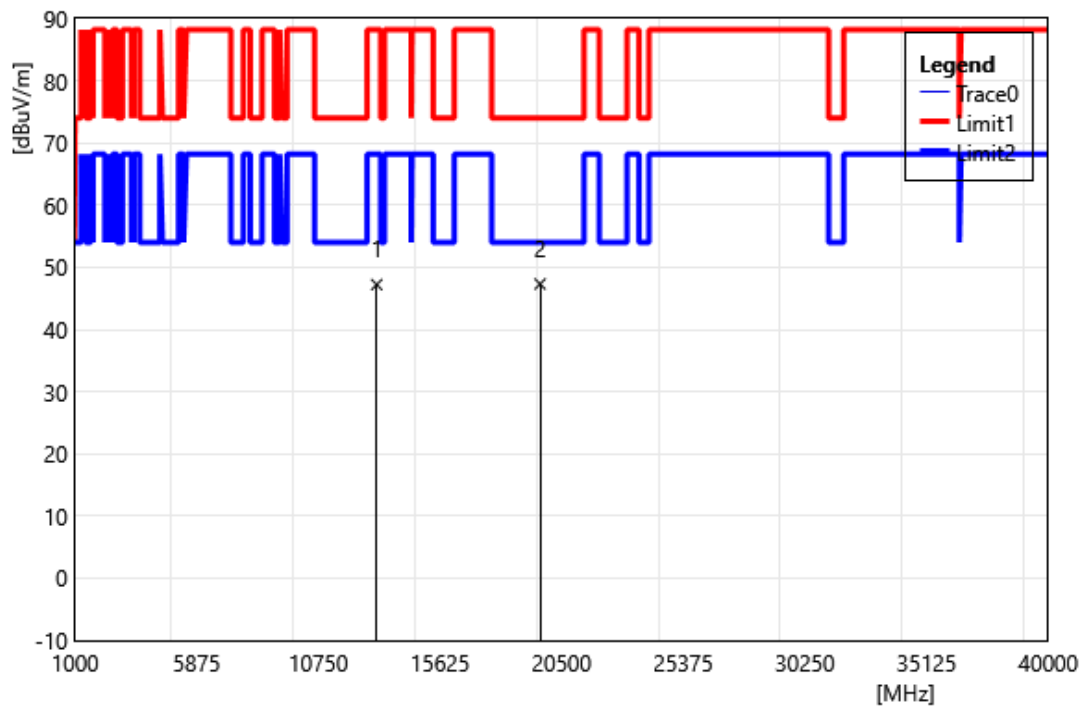


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	34.28	12.95	47.23	88.20	-40.97	PEAK
2	19635.00	31.35	15.98	47.33	74.00	-26.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6625		
	MHz		
Polarization:	Vertical		
Remark:			

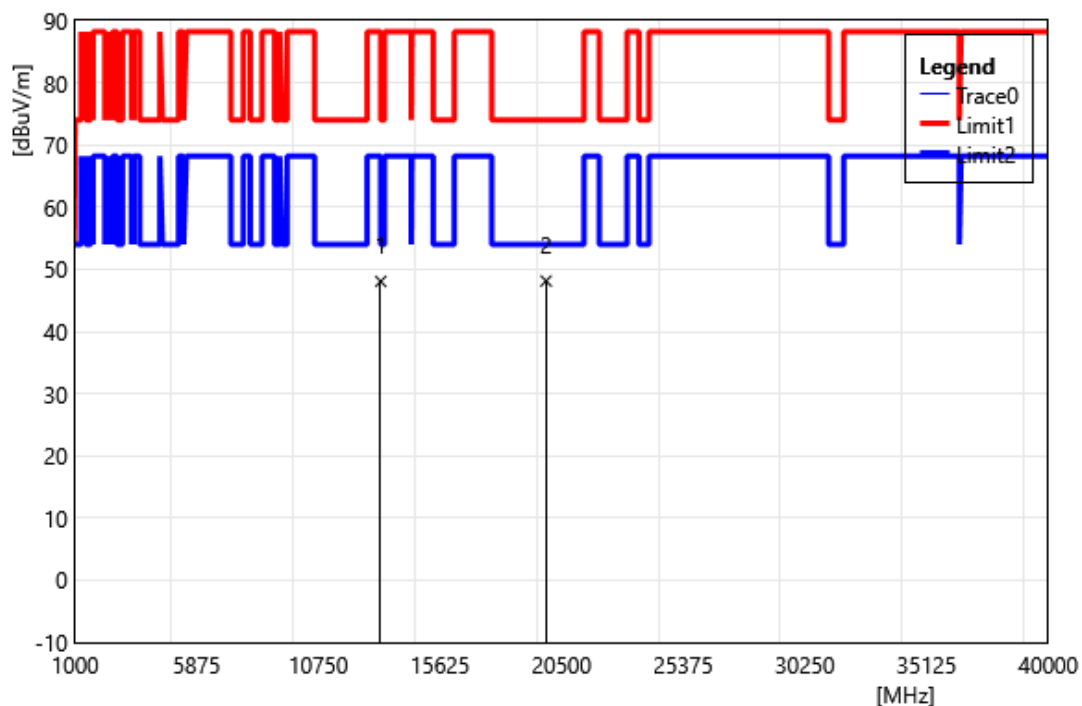


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	34.82	13.24	48.06	74.00	-25.94	PEAK
2	19875.00	31.77	16.35	48.12	74.00	-25.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6625		
	MHz		
Polarization:	Horizontal		
Remark:			

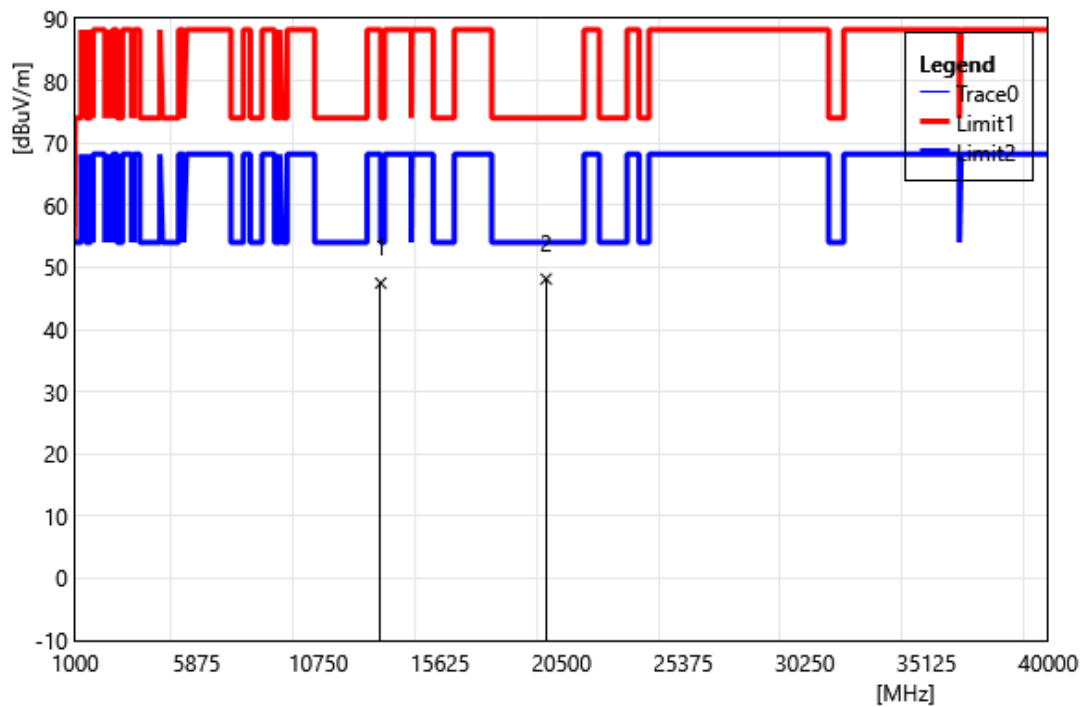


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	34.22	13.24	47.46	74.00	-26.54	PEAK
2	19875.00	31.78	16.35	48.13	74.00	-25.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6705		
	MHz		
Polarization:	Vertical		
Remark:			

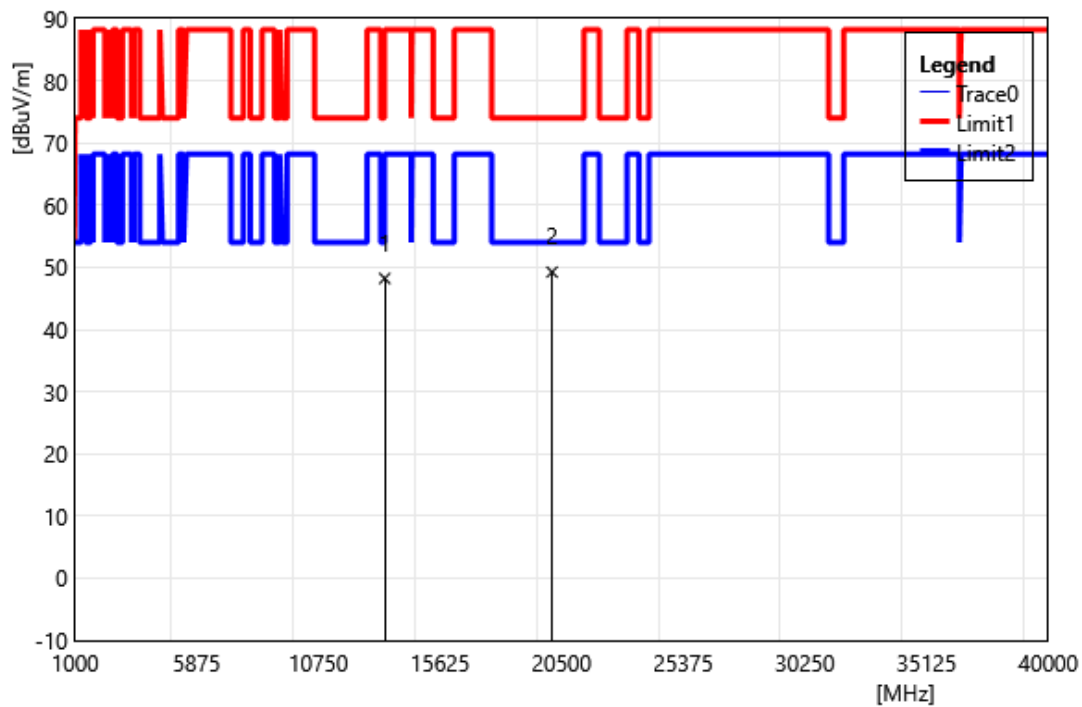


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	34.34	13.88	48.22	88.20	-39.98	PEAK
2	20115.00	32.98	16.27	49.25	74.00	-24.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6705		
	MHz		
Polarization:	Horizontal		
Remark:			

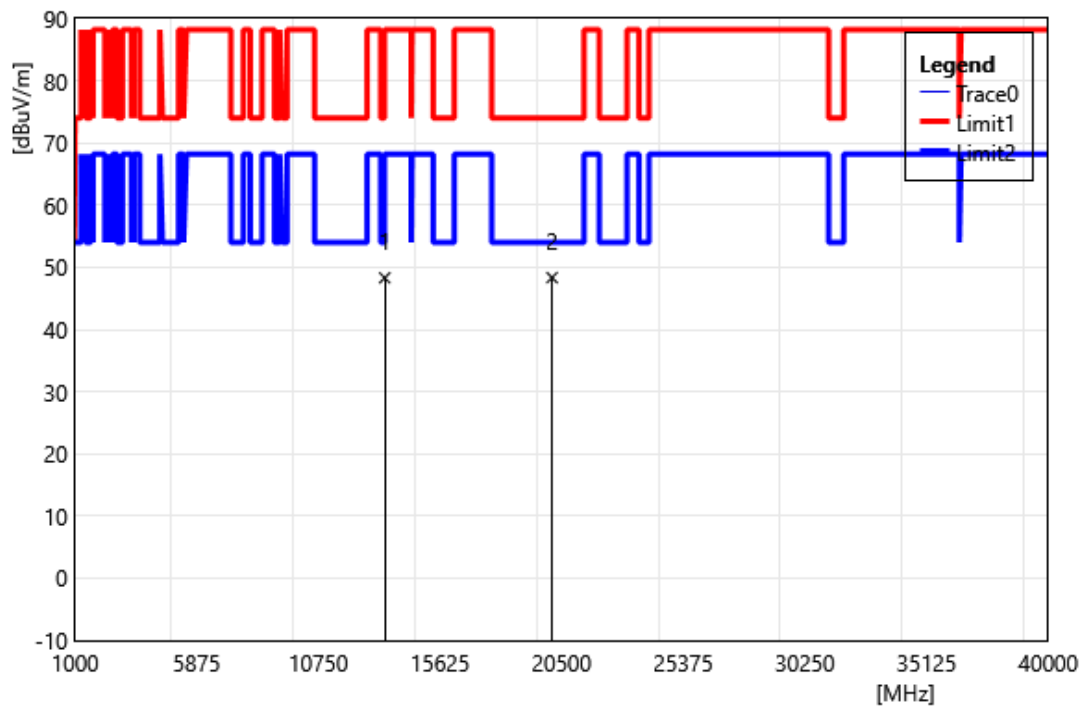


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	34.43	13.88	48.31	88.20	-39.89	PEAK
2	20115.00	32.08	16.27	48.35	74.00	-25.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6785		
	MHz		
Polarization:	Vertical		
Remark:			

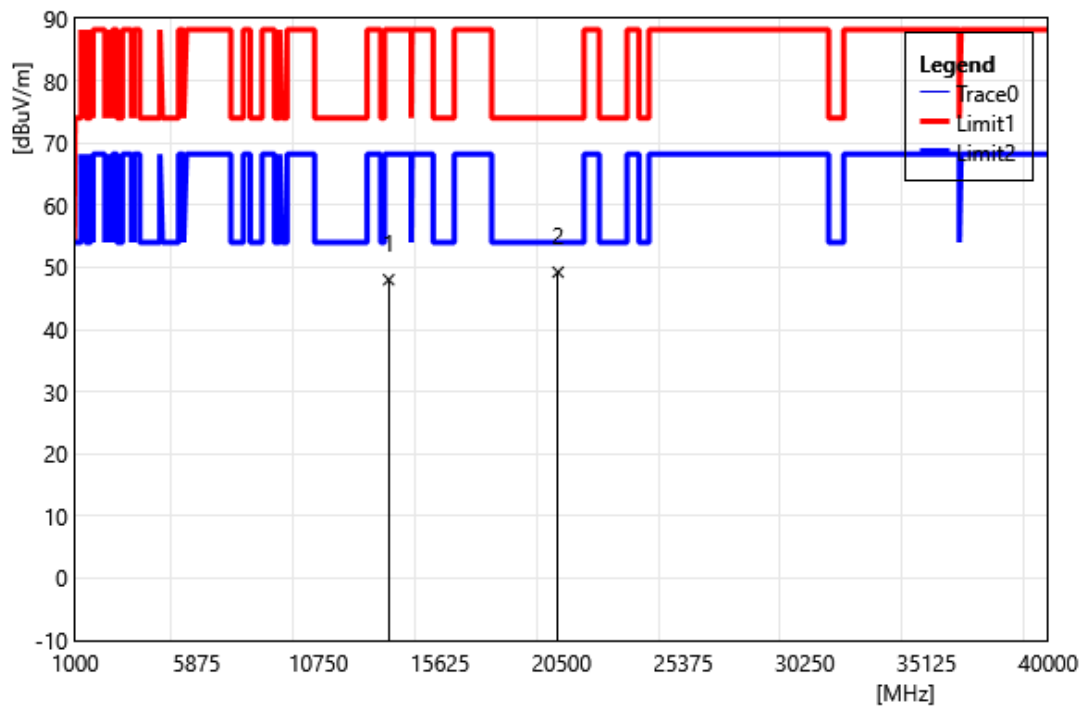


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	33.63	14.39	48.02	88.20	-40.18	PEAK
2	20355.00	32.64	16.59	49.23	74.00	-24.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6785		
	MHz		
Polarization:	Horizontal		
Remark:			

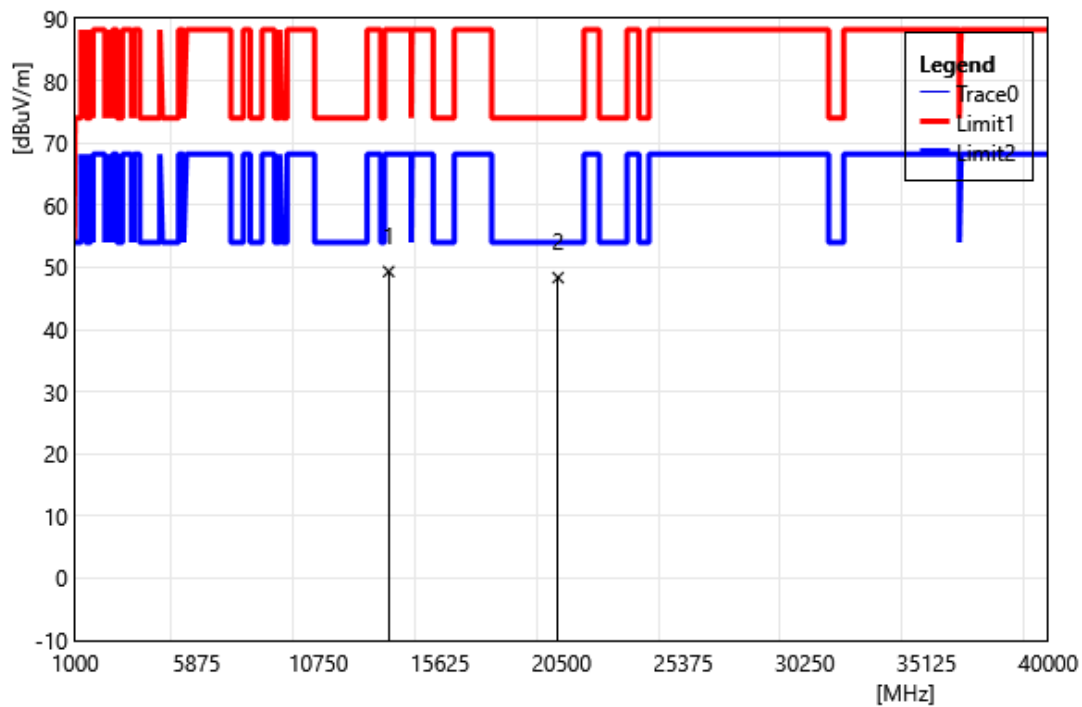


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	34.93	14.39	49.32	88.20	-38.88	PEAK
2	20355.00	31.76	16.59	48.35	74.00	-25.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6865		
	MHz		
Polarization:	Vertical		
Remark:			

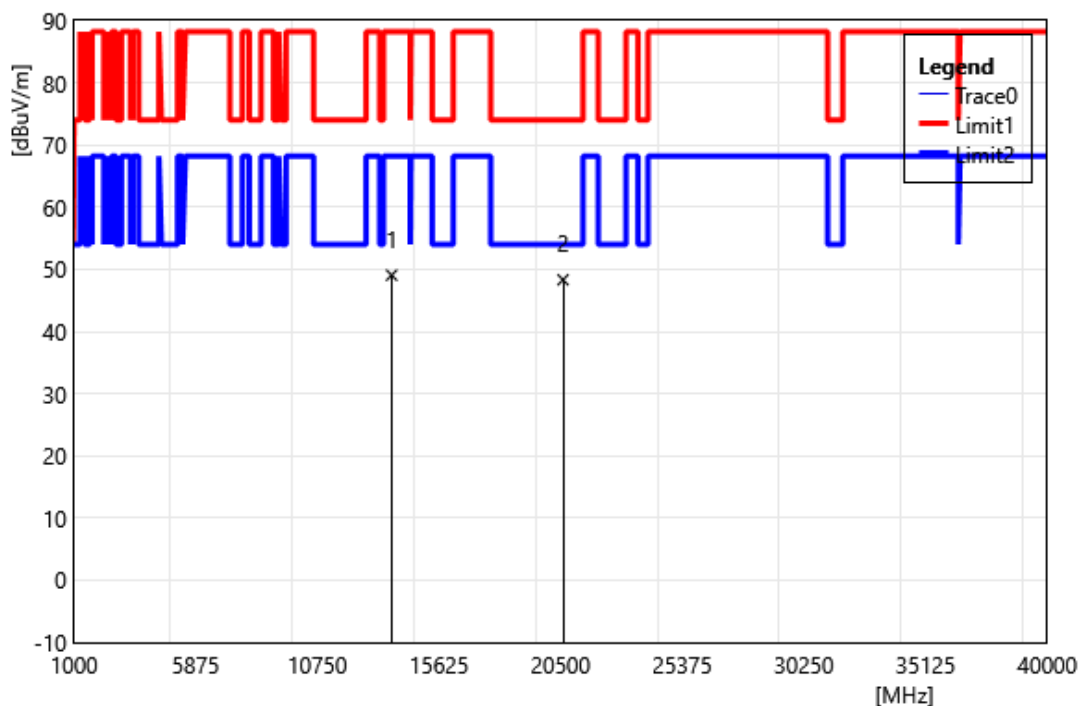


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	34.56	14.50	49.06	88.20	-39.14	PEAK
2	20595.00	31.69	16.63	48.32	74.00	-25.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6865		
	MHz		
Polarization:	Horizontal		
Remark:			

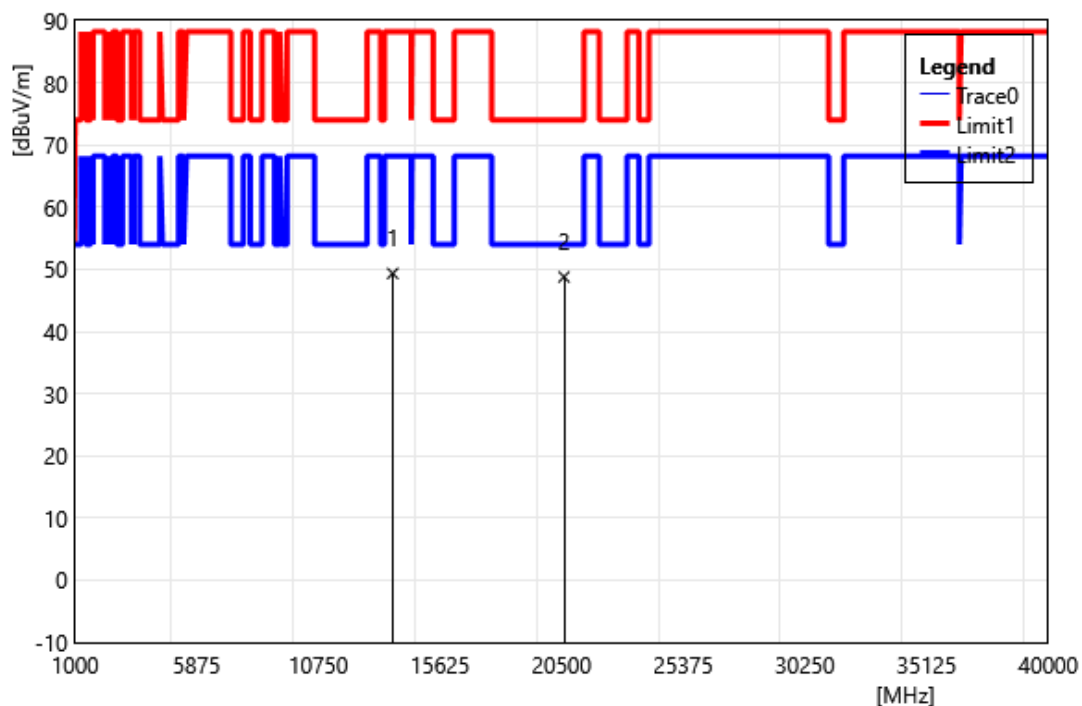


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	34.84	14.50	49.34	88.20	-38.86	PEAK
2	20595.00	32.14	16.63	48.77	74.00	-25.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6945		
	MHz		
Polarization:	Vertical		
Remark:			

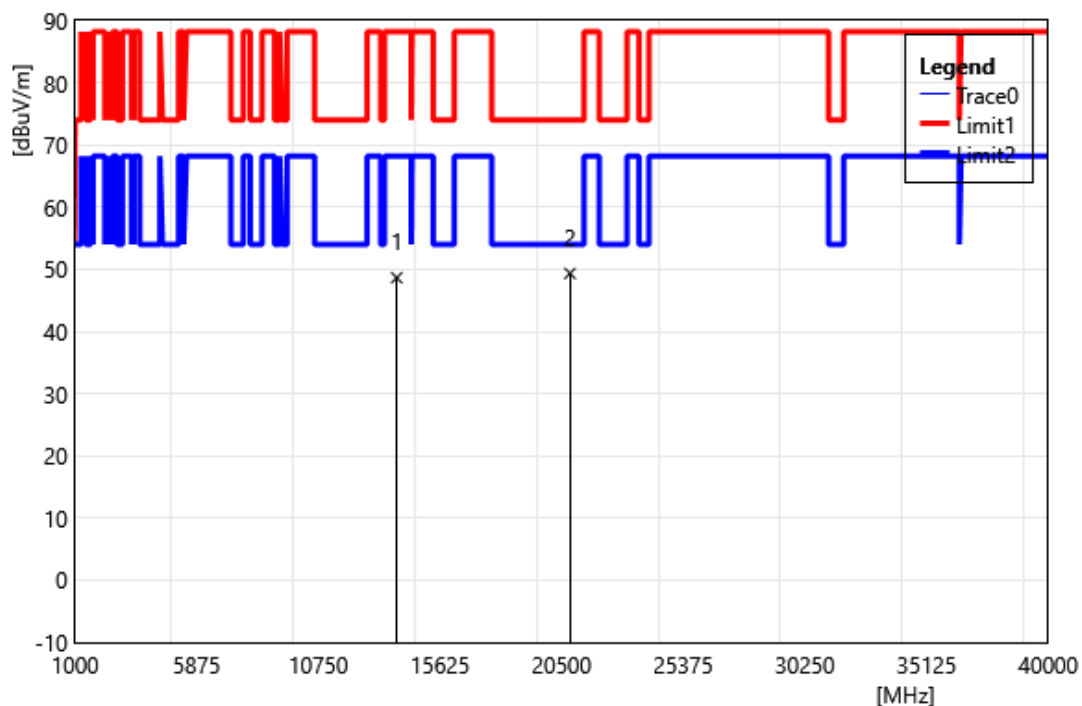


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	33.86	14.81	48.67	88.20	-39.53	PEAK
2	20835.00	32.41	16.93	49.34	74.00	-24.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6945		
	MHz		
Polarization:	Horizontal		
Remark:			

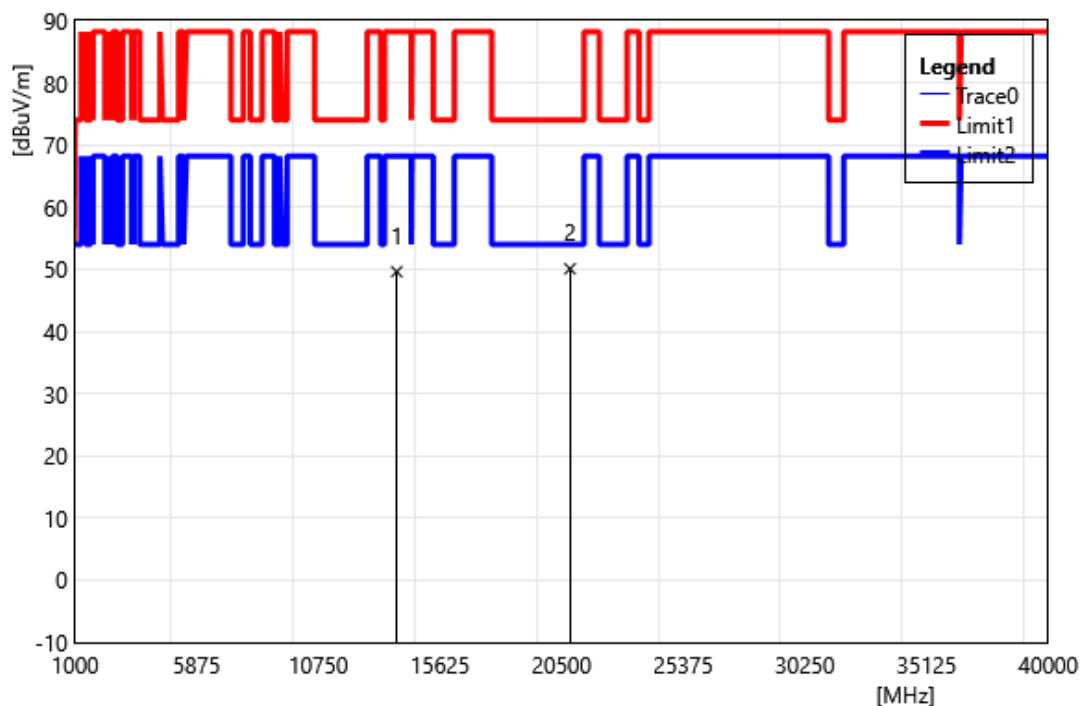


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	34.81	14.81	49.62	88.20	-38.58	PEAK
2	20835.00	33.16	16.93	50.09	74.00	-23.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

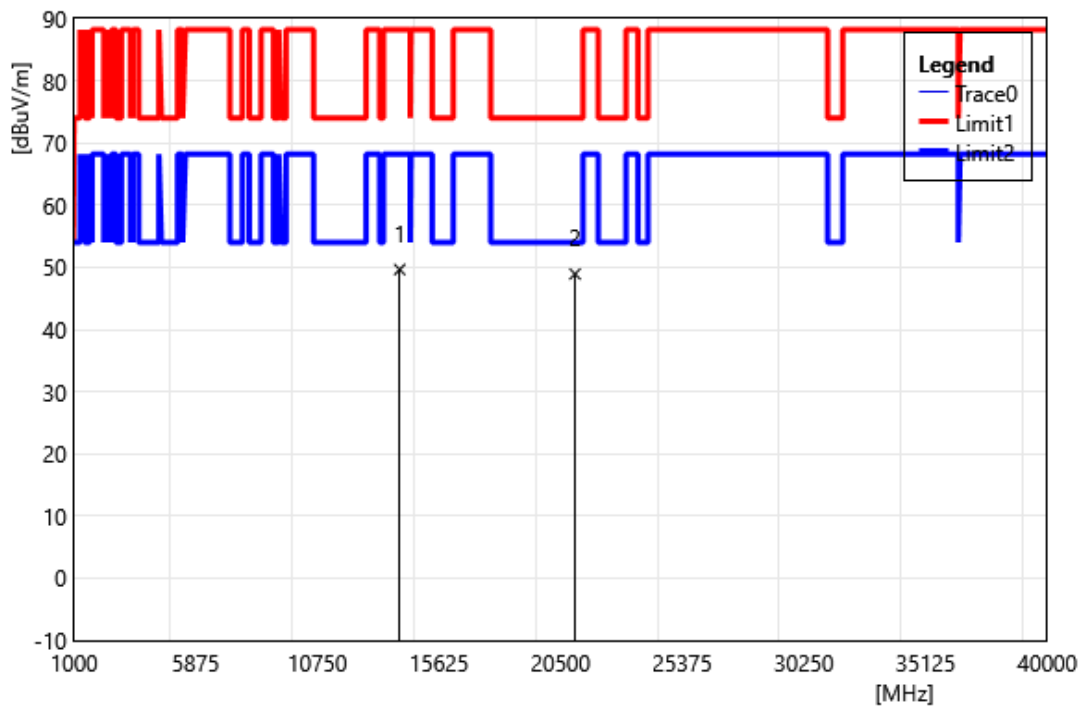


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	34.44	15.21	49.65	88.20	-38.55	PEAK
2	21075.00	32.75	16.18	48.93	74.00	-25.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

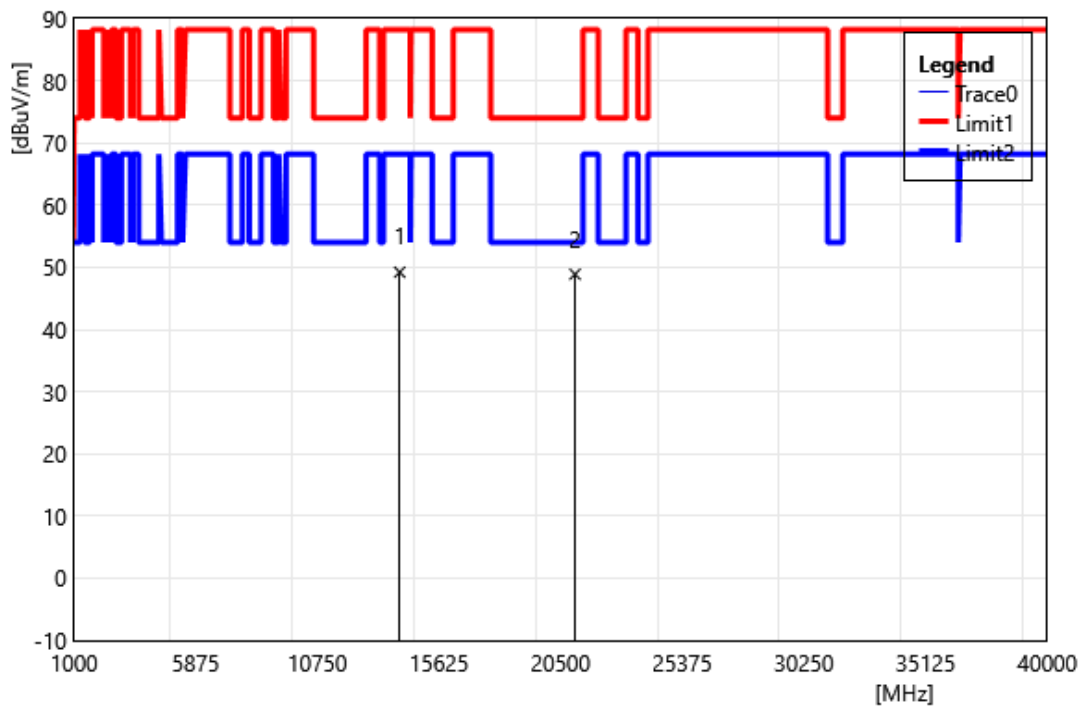


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	34.02	15.21	49.23	88.20	-38.97	PEAK
2	21075.00	32.71	16.18	48.89	74.00	-25.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

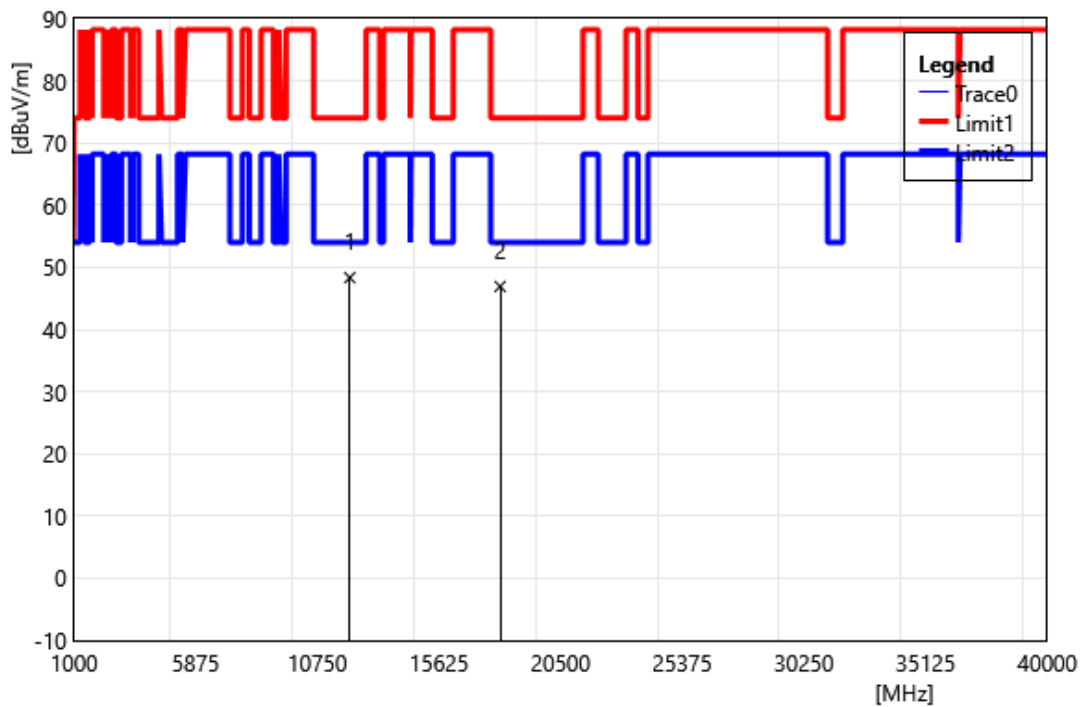


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	36.47	11.88	48.35	74.00	-25.65	PEAK
2	18075.00	32.65	14.27	46.92	74.00	-27.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

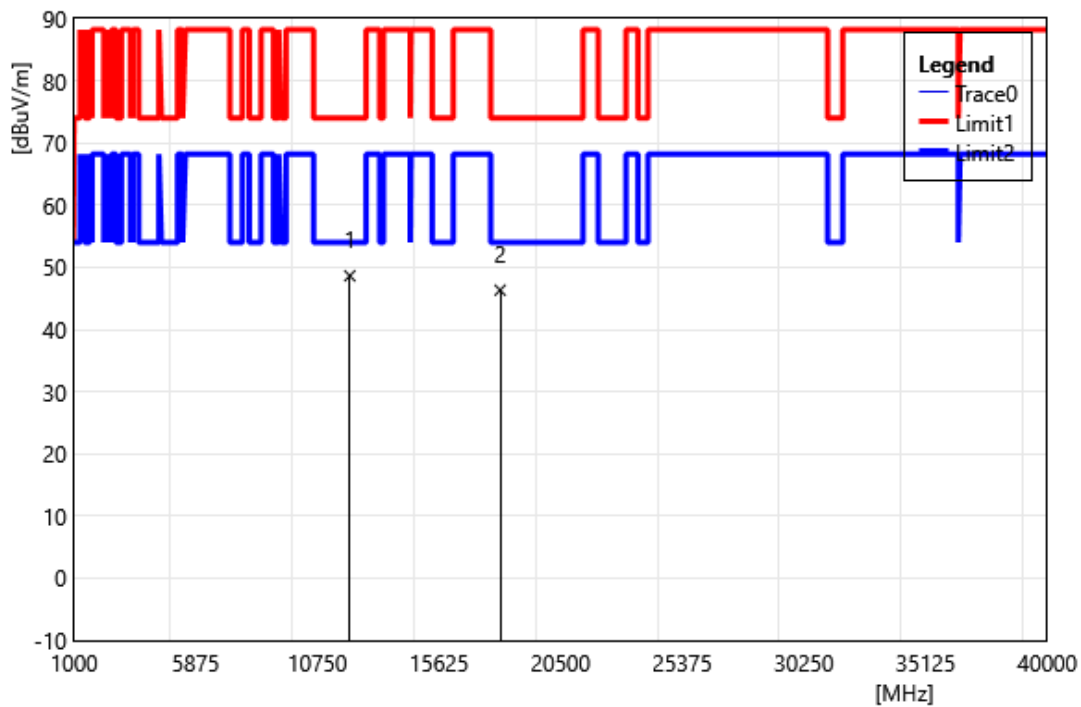


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	36.76	11.88	48.64	74.00	-25.36	PEAK
2	18075.00	32.06	14.27	46.33	74.00	-27.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Vertical		
Remark:			

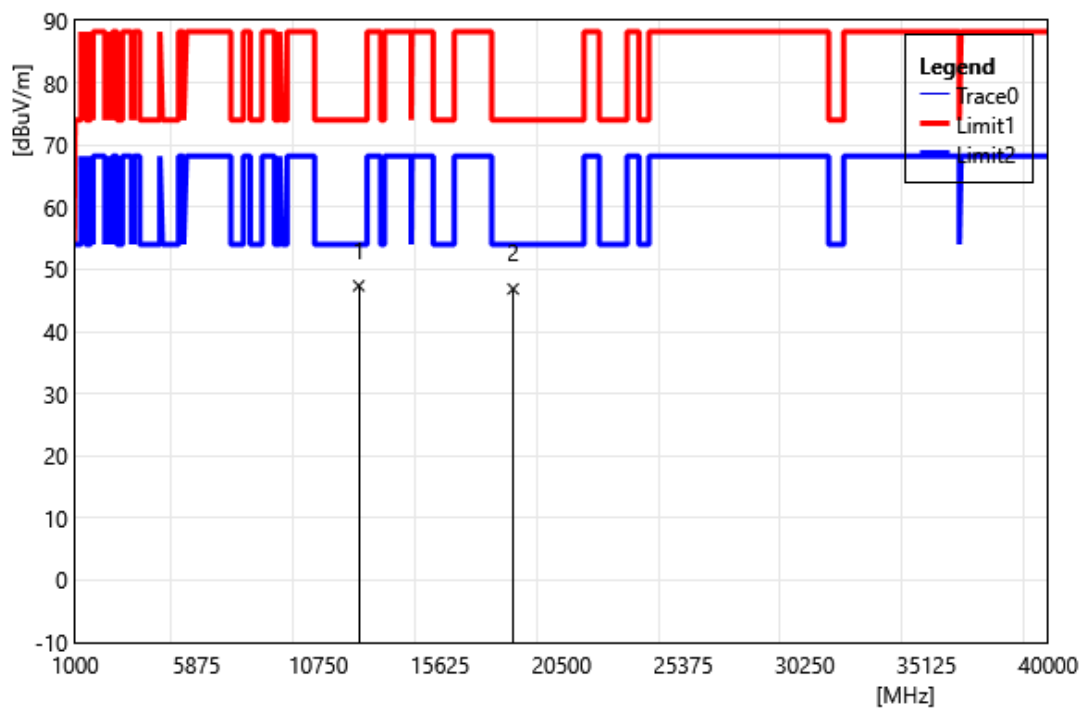


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	35.68	11.66	47.34	74.00	-26.66	PEAK
2	18555.00	31.87	14.97	46.84	74.00	-27.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185 MHz		
Polarization:	Horizontal		
Remark:			

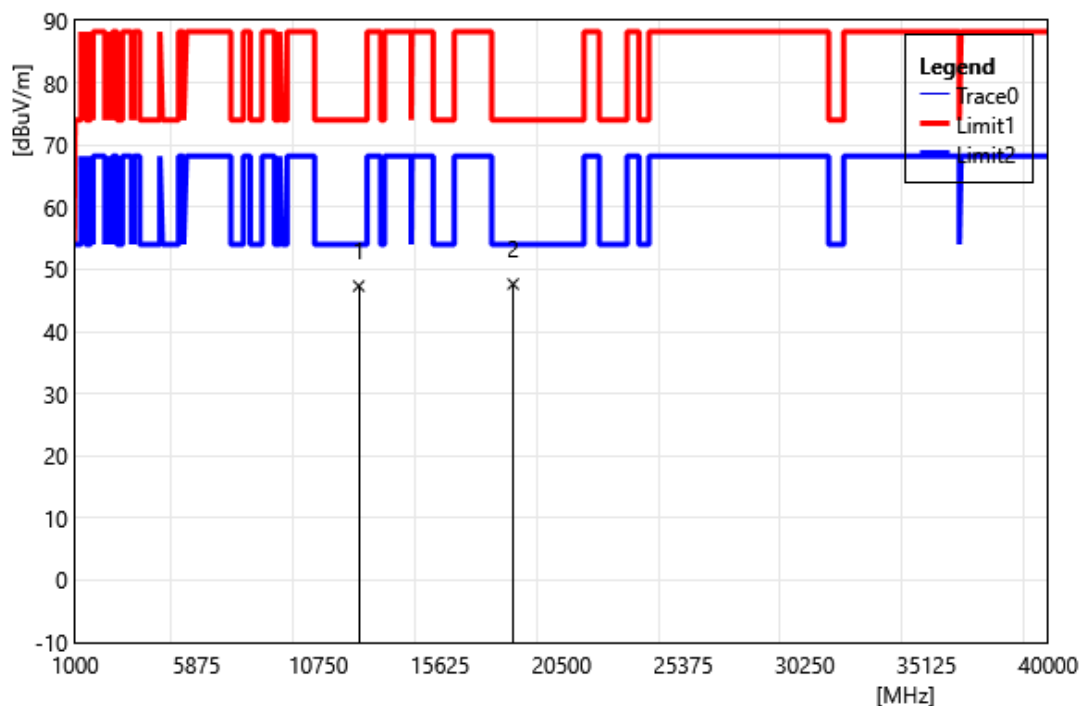


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	35.64	11.66	47.30	74.00	-26.70	PEAK
2	18555.00	32.66	14.97	47.63	74.00	-26.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Vertical		
Remark:			

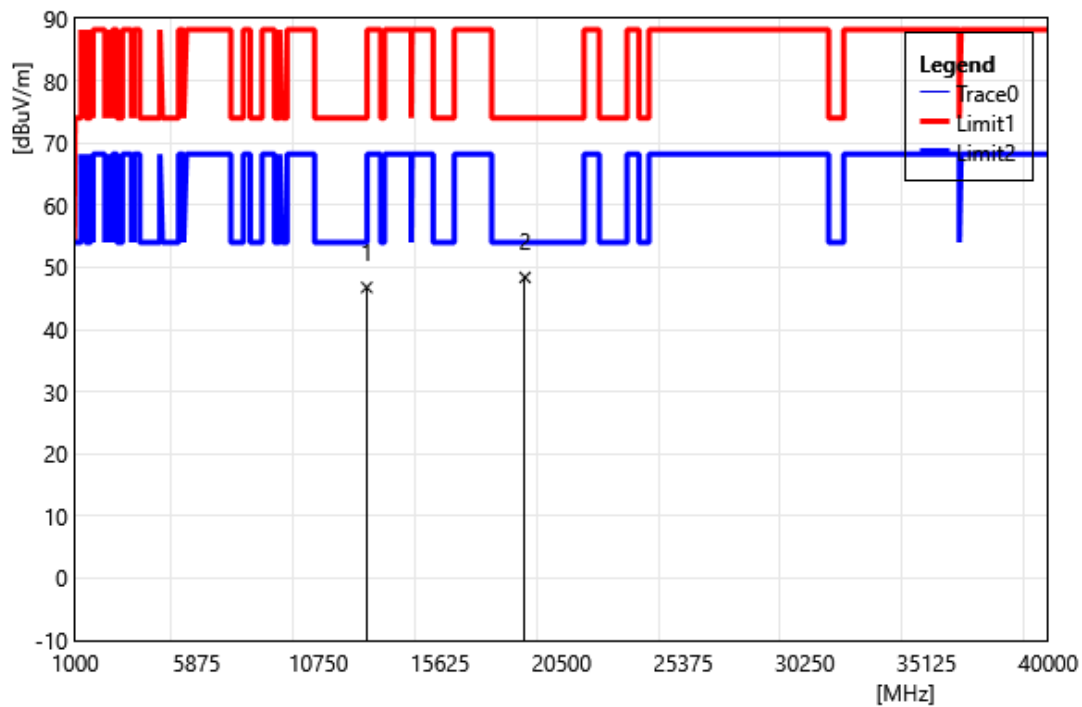


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.56	12.21	46.77	74.00	-27.23	PEAK
2	19035.00	32.74	15.64	48.38	74.00	-25.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Horizontal		
Remark:			

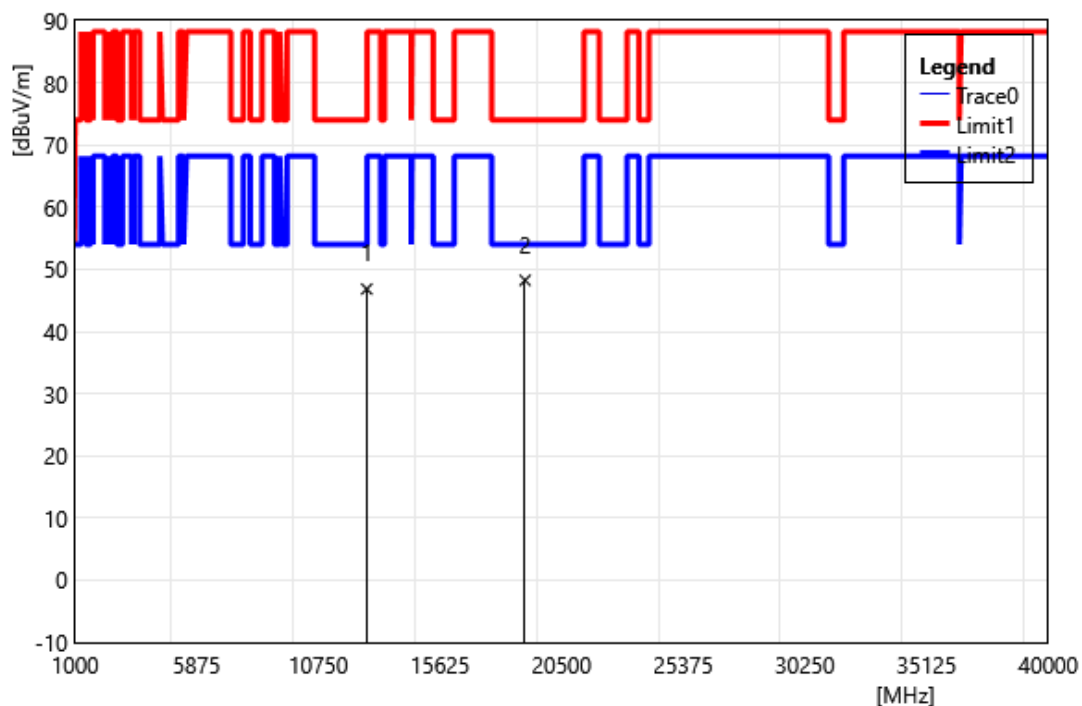


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.62	12.21	46.83	74.00	-27.17	PEAK
2	19035.00	32.60	15.64	48.24	74.00	-25.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Vertical		
Remark:			

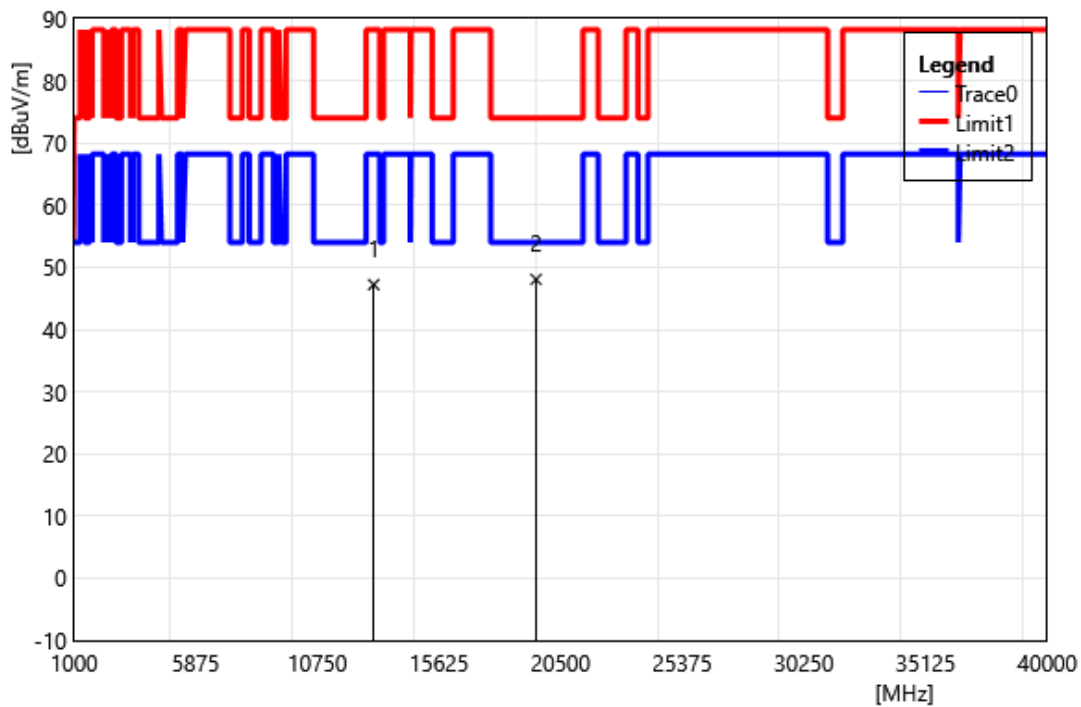


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	34.20	13.03	47.23	88.20	-40.97	PEAK
2	19515.00	32.27	15.80	48.07	74.00	-25.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Horizontal		
Remark:			

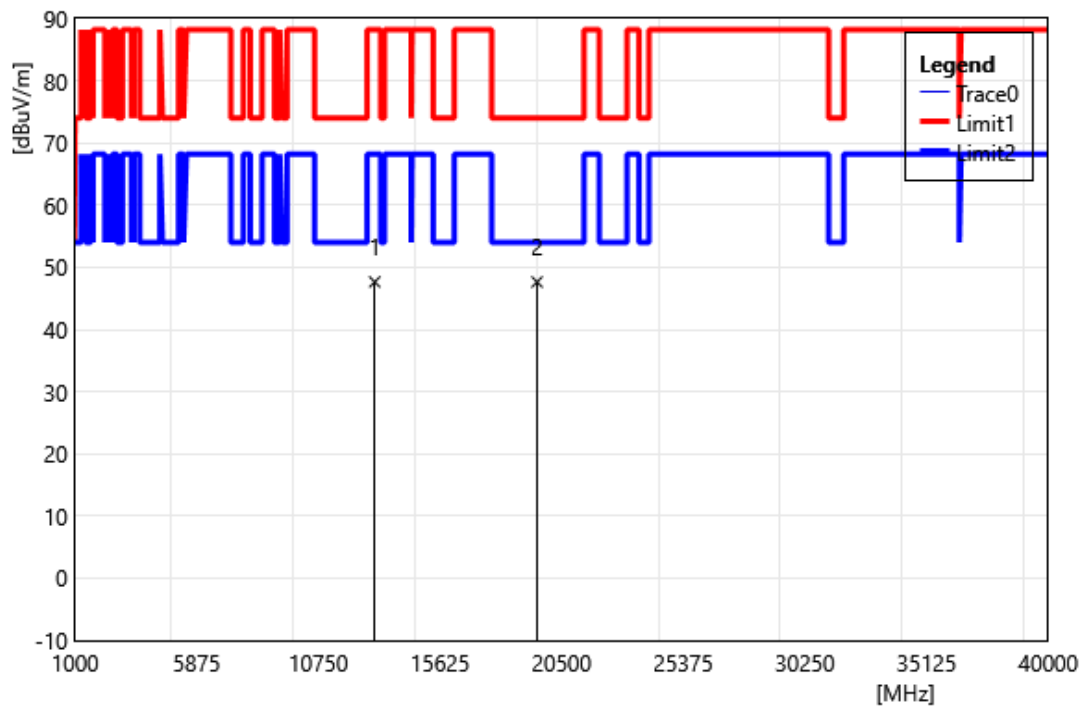


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	34.63	13.03	47.66	88.20	-40.54	PEAK
2	19515.00	31.84	15.80	47.64	74.00	-26.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Vertical		
Remark:			

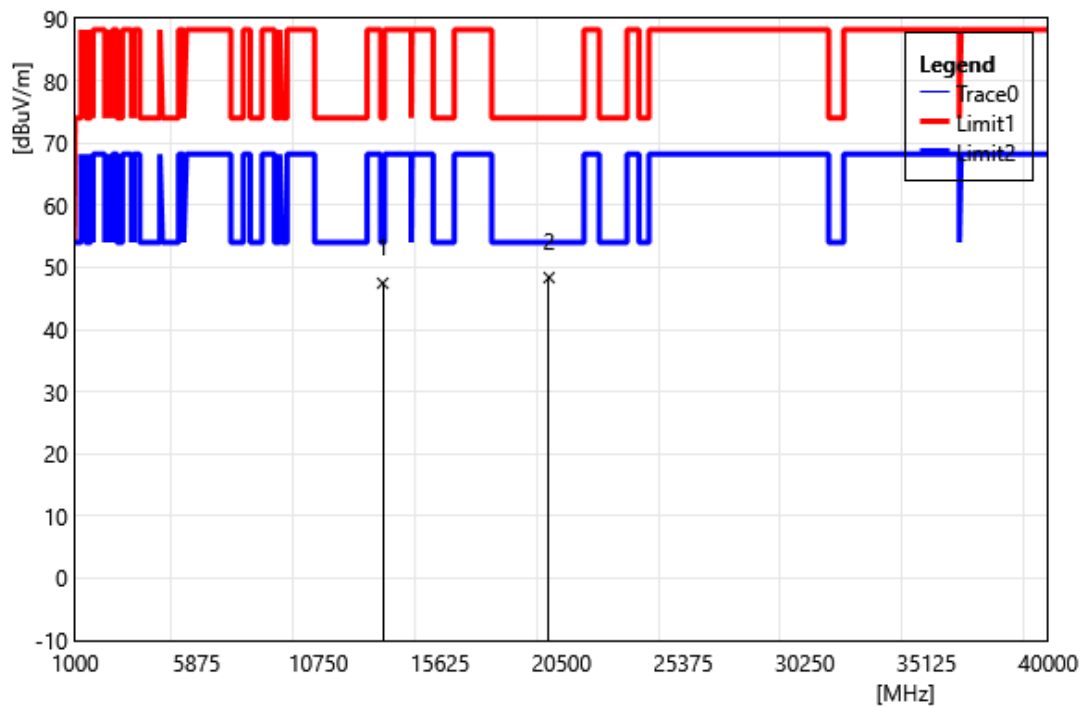


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	33.97	13.48	47.45	74.00	-26.55	PEAK
2	19995.00	31.82	16.53	48.35	74.00	-25.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665 MHz		
Polarization:	Horizontal		
Remark:			

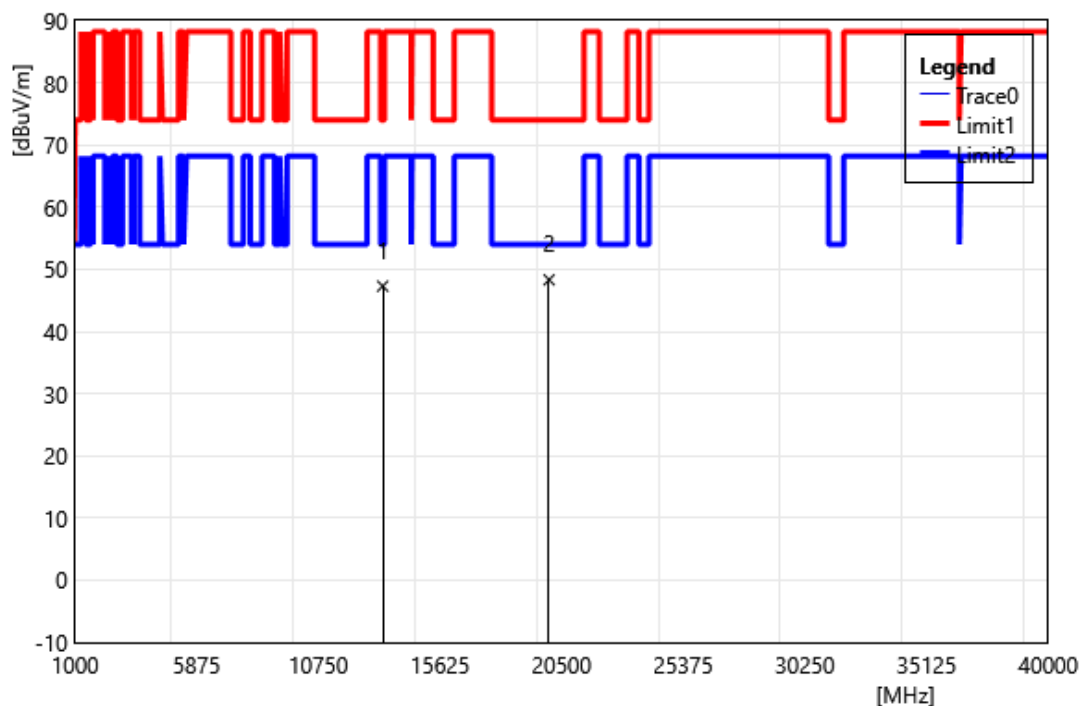


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	33.81	13.48	47.29	74.00	-26.71	PEAK
2	19995.00	31.78	16.53	48.31	74.00	-25.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825 MHz		
Polarization:	Vertical		
Remark:			

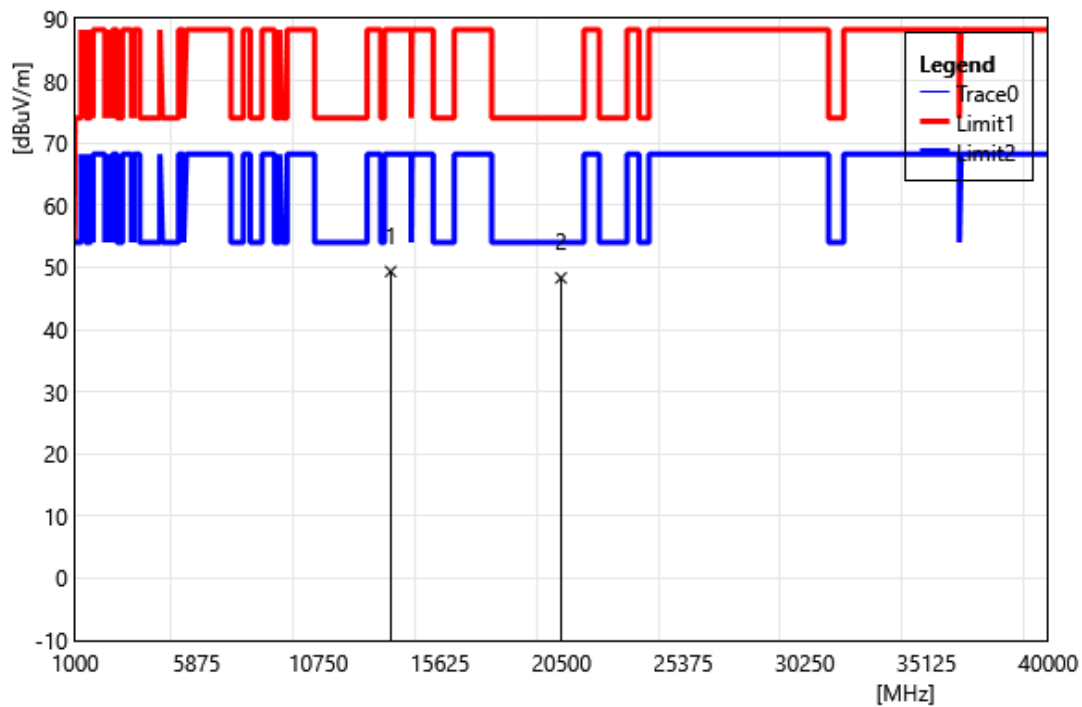


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	34.83	14.51	49.34	88.20	-38.86	PEAK
2	20475.00	31.55	16.76	48.31	74.00	-25.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825 MHz		
Polarization:	Horizontal		
Remark:			

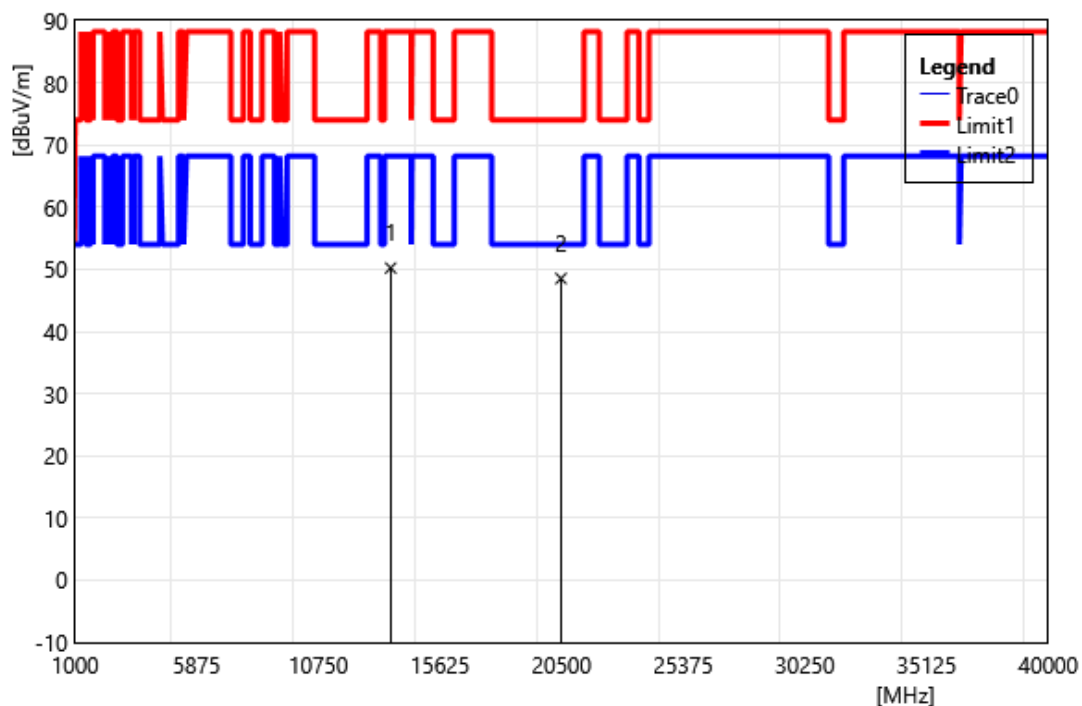


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	35.70	14.51	50.21	88.20	-37.99	PEAK
2	20475.00	31.77	16.76	48.53	74.00	-25.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

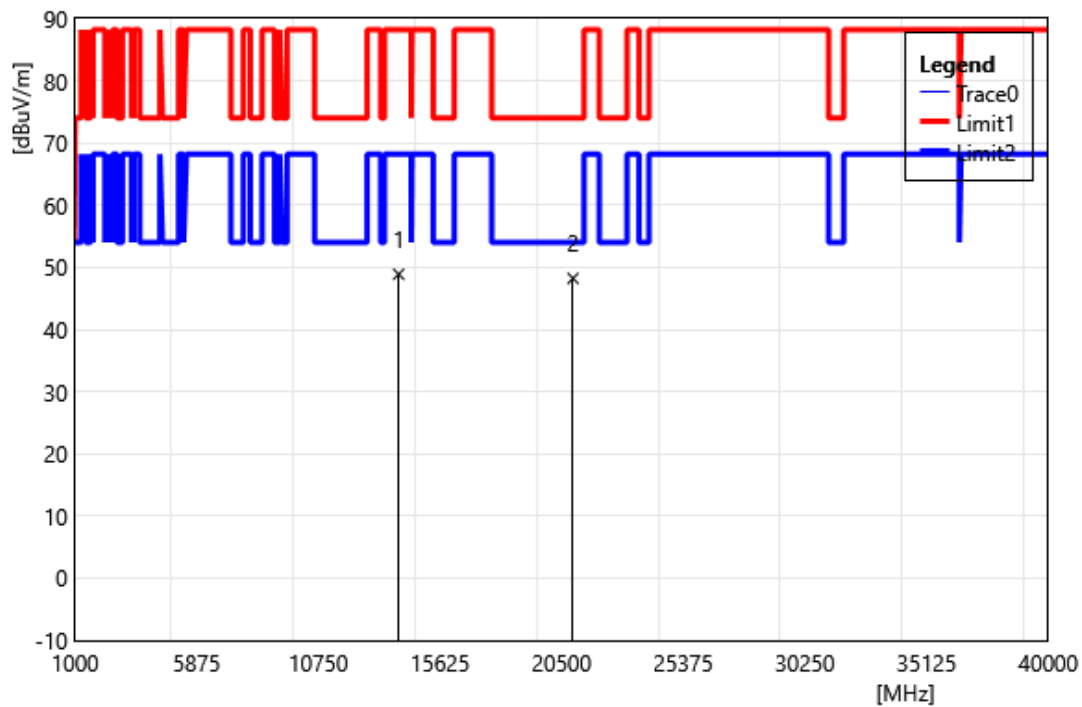


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	34.03	14.85	48.88	88.20	-39.32	PEAK
2	20955.00	31.14	17.08	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

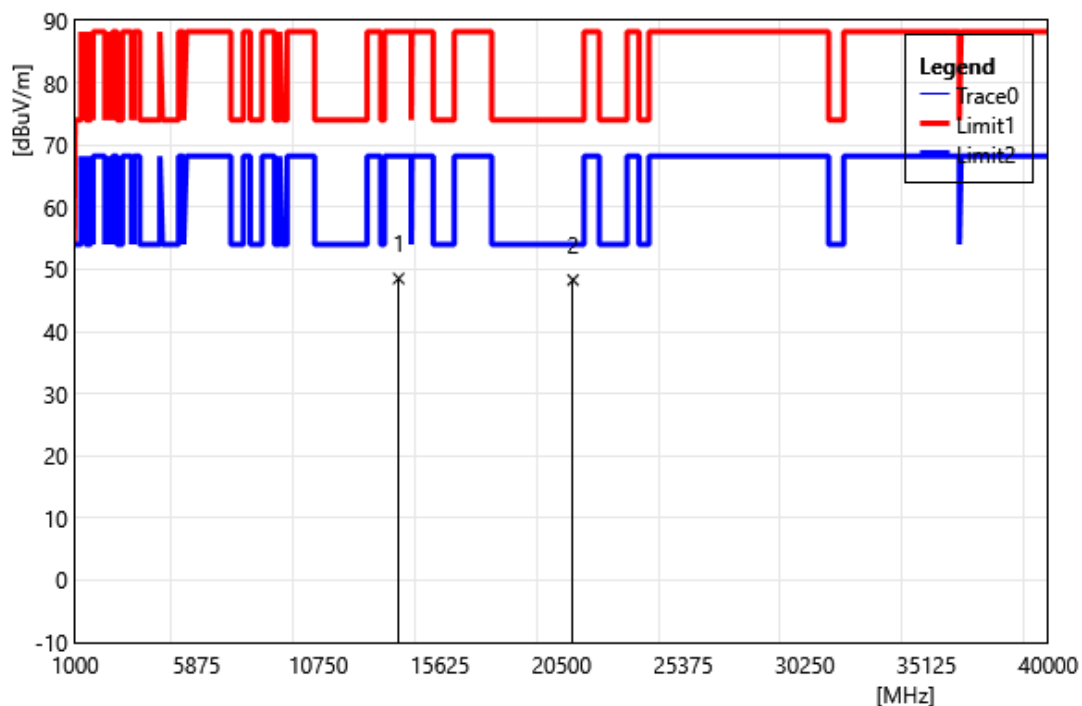


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	33.66	14.85	48.51	88.20	-39.69	PEAK
2	20955.00	31.20	17.08	48.28	74.00	-25.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

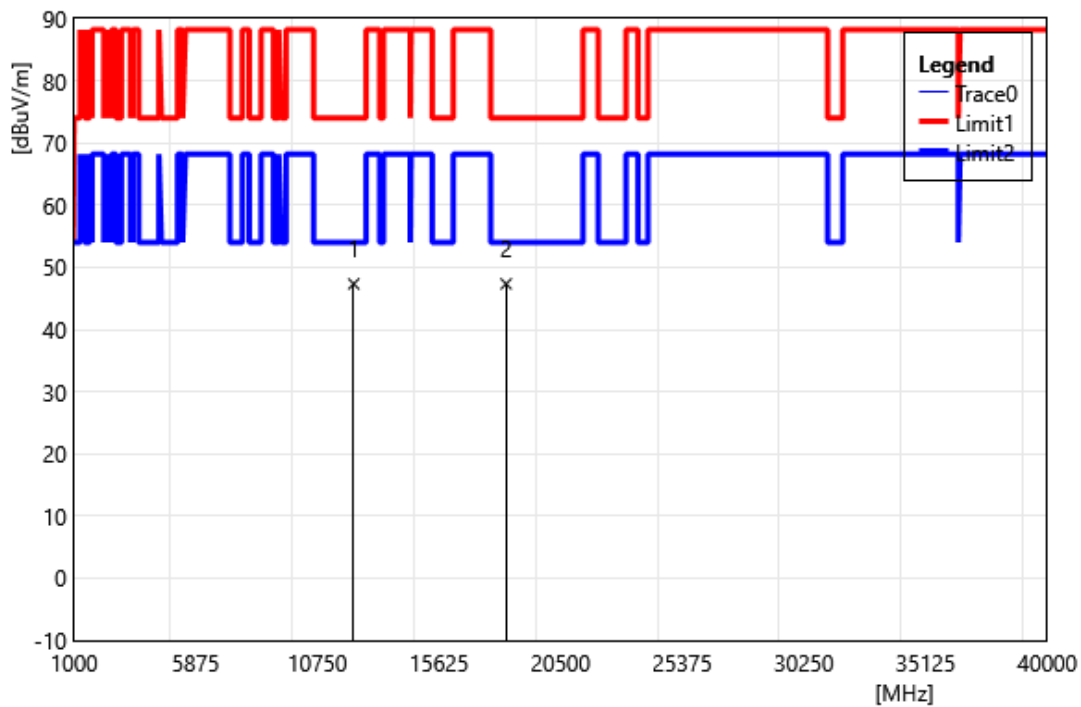


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	35.37	11.96	47.33	74.00	-26.67	PEAK
2	18315.00	32.41	14.93	47.34	74.00	-26.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

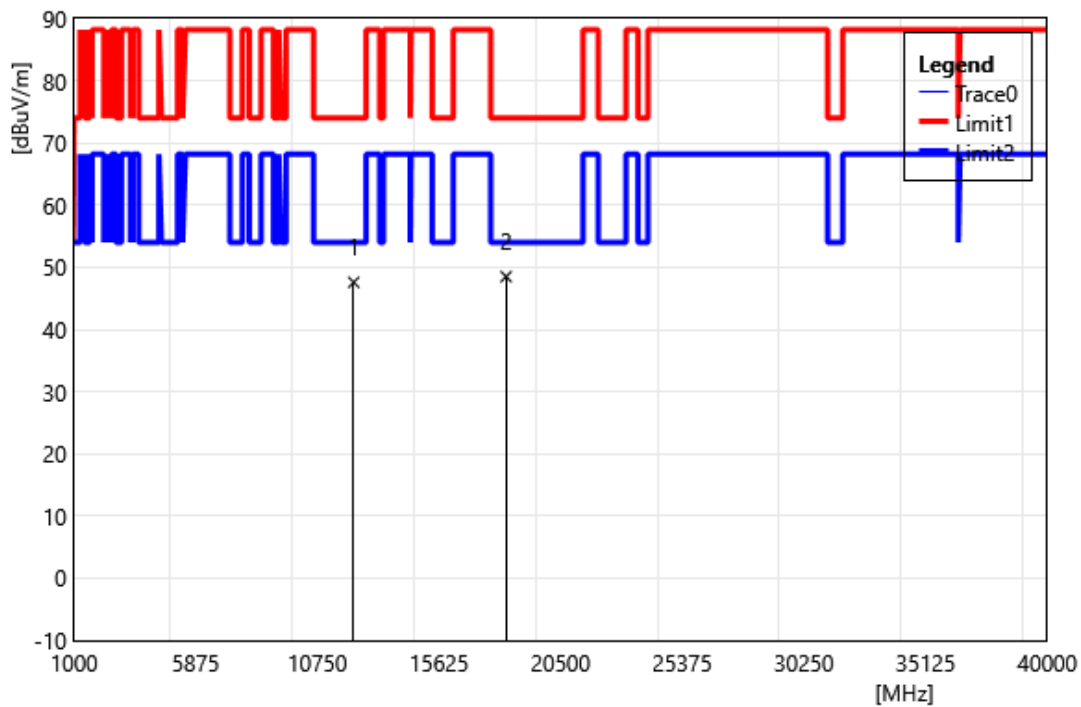


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	35.63	11.96	47.59	74.00	-26.41	PEAK
2	18315.00	33.57	14.93	48.50	74.00	-25.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Vertical		
Remark:			

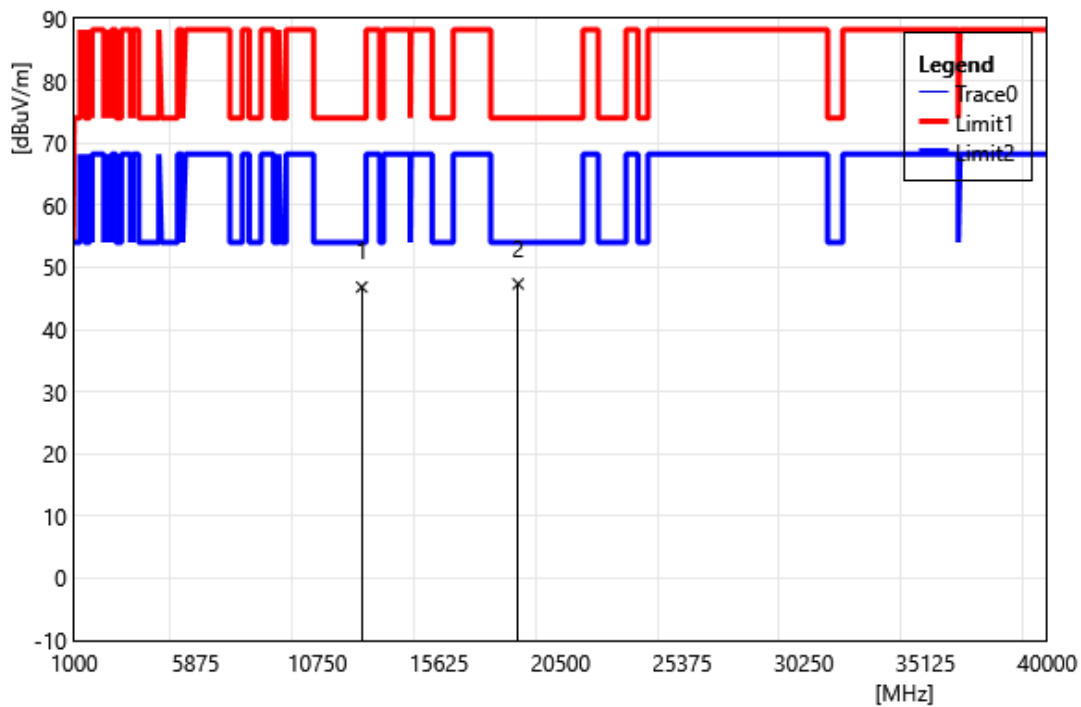


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	35.19	11.64	46.83	74.00	-27.17	PEAK
2	18795.00	31.86	15.49	47.35	74.00	-26.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Horizontal		
Remark:			

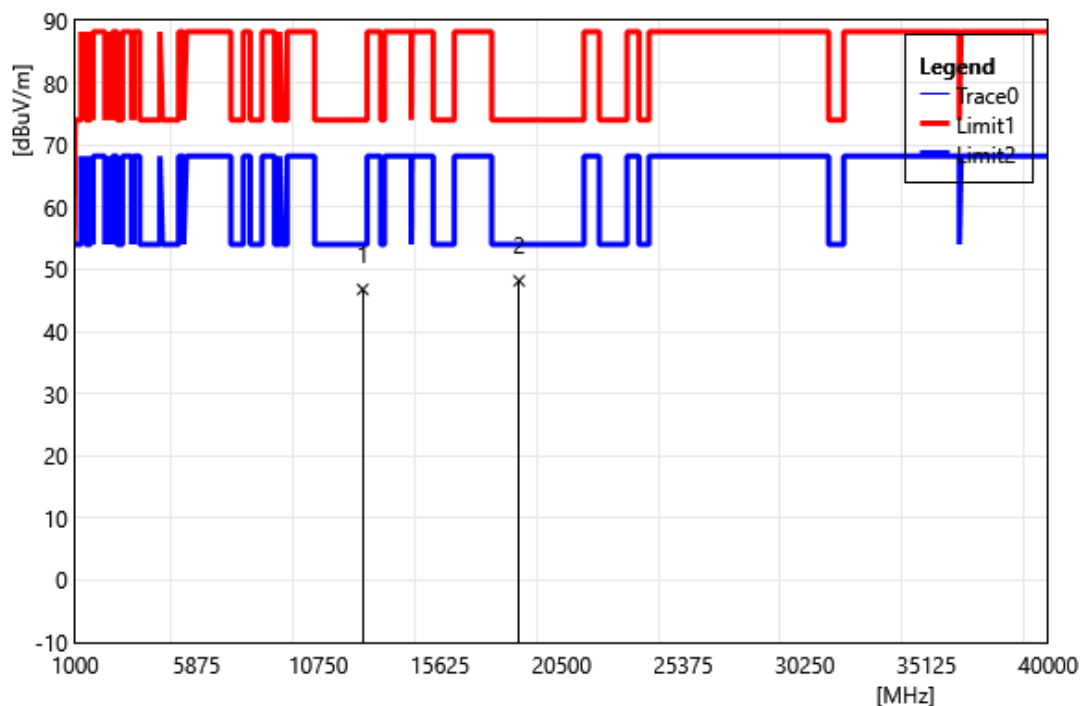


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	35.13	11.64	46.77	74.00	-27.23	PEAK
2	18795.00	32.67	15.49	48.16	74.00	-25.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Vertical		
Remark:			

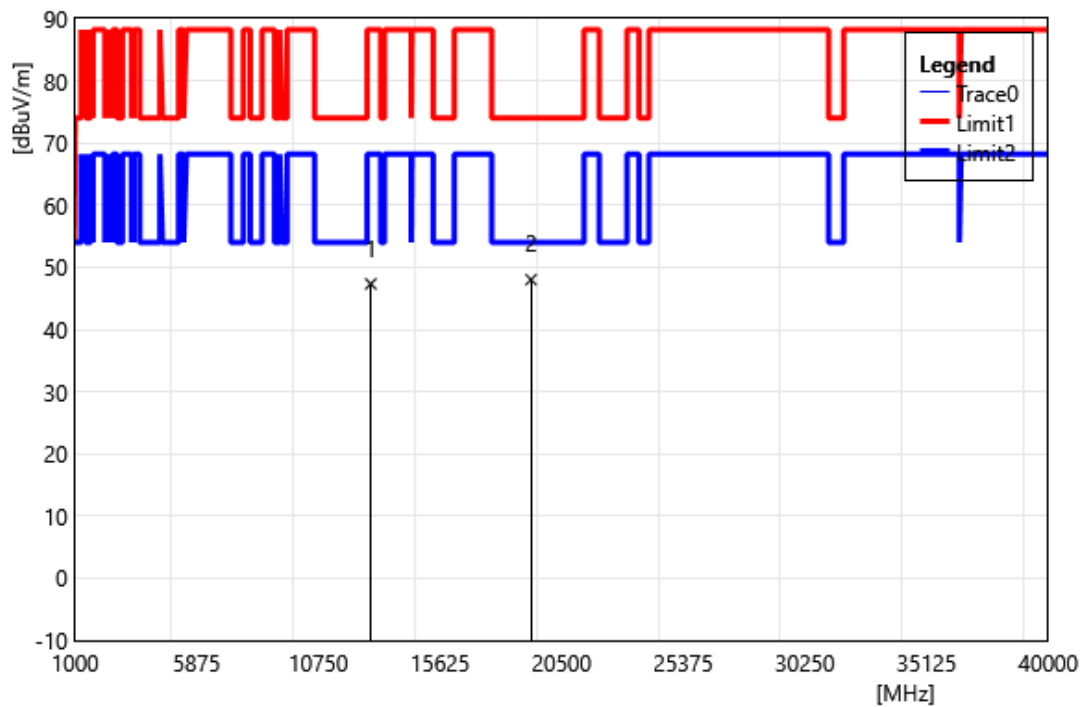


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	34.54	12.79	47.33	88.20	-40.87	PEAK
2	19275.00	31.93	16.10	48.03	74.00	-25.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Horizontal		
Remark:			

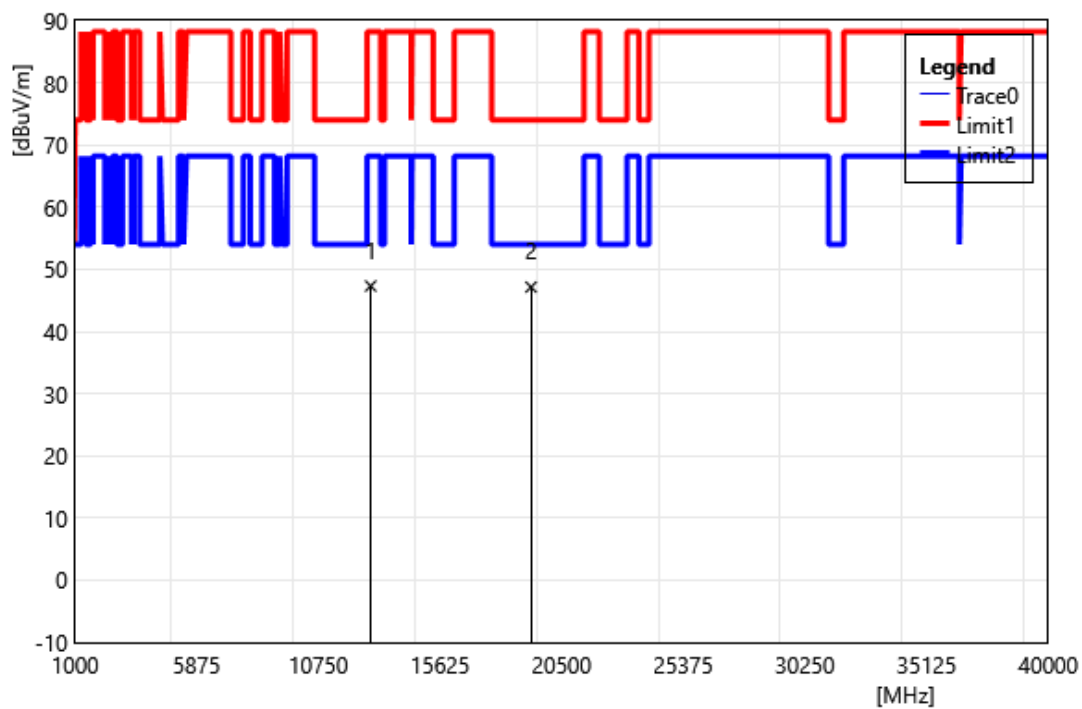


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	34.53	12.79	47.32	88.20	-40.88	PEAK
2	19275.00	31.05	16.10	47.15	74.00	-26.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585 MHz		
Polarization:	Vertical		
Remark:			

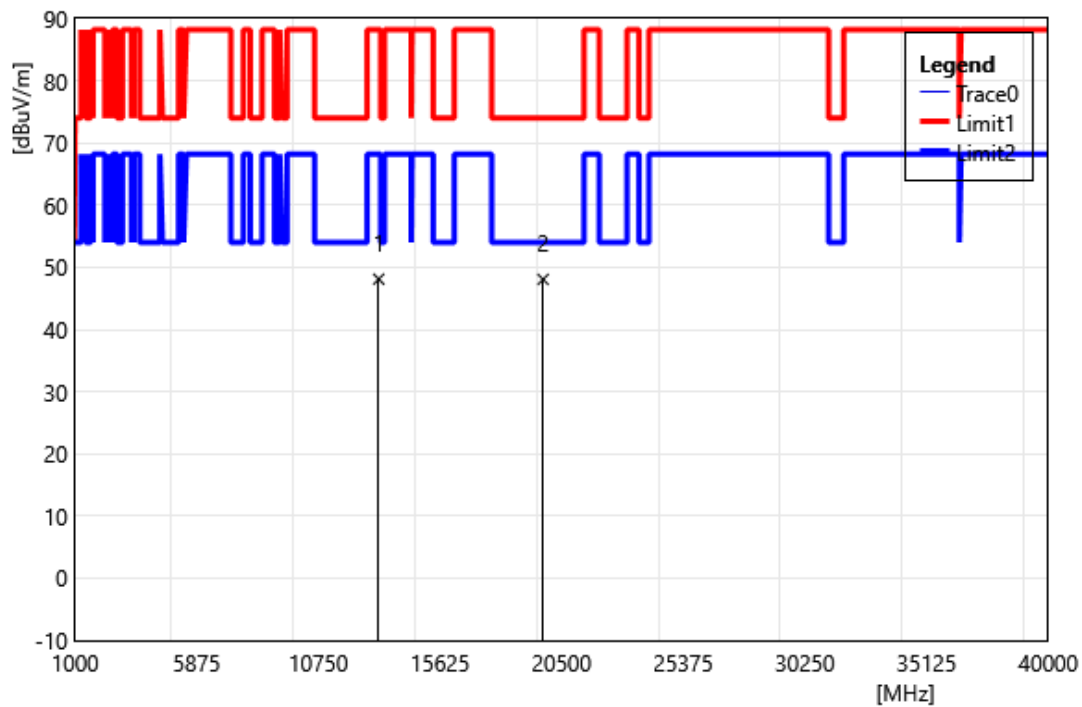


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	35.03	13.08	48.11	88.20	-40.09	PEAK
2	19755.00	31.91	16.16	48.07	74.00	-25.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585 MHz		
Polarization:	Horizontal		
Remark:			

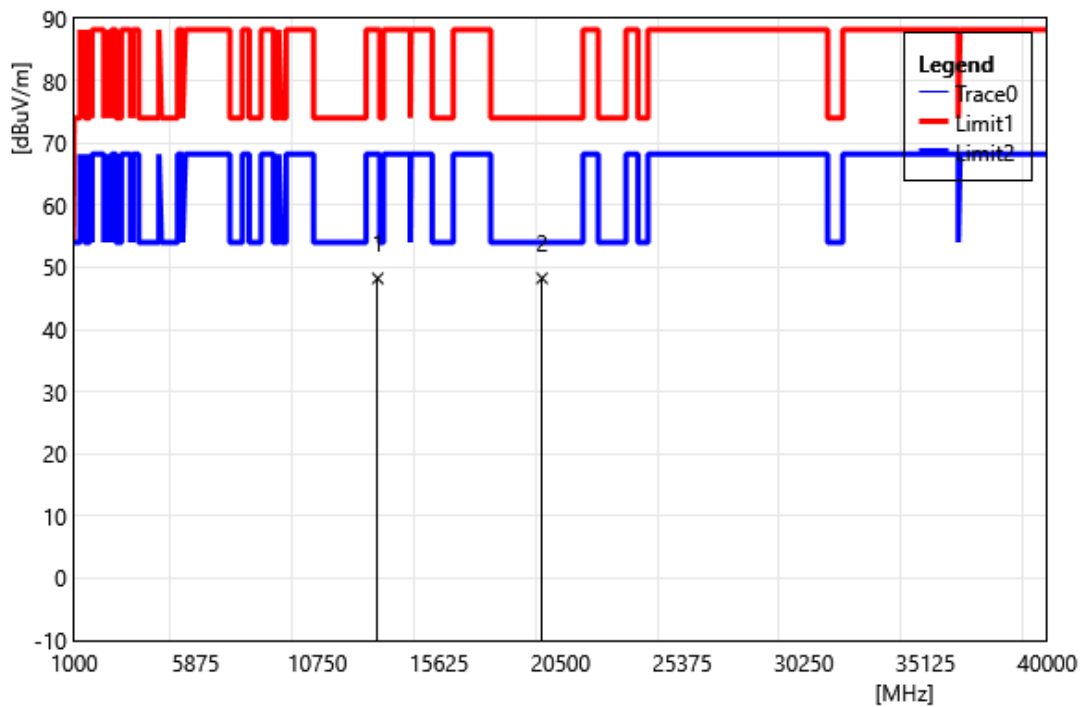


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	35.14	13.08	48.22	88.20	-39.98	PEAK
2	19755.00	32.07	16.16	48.23	74.00	-25.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745 MHz		
Polarization:	Vertical		
Remark:			

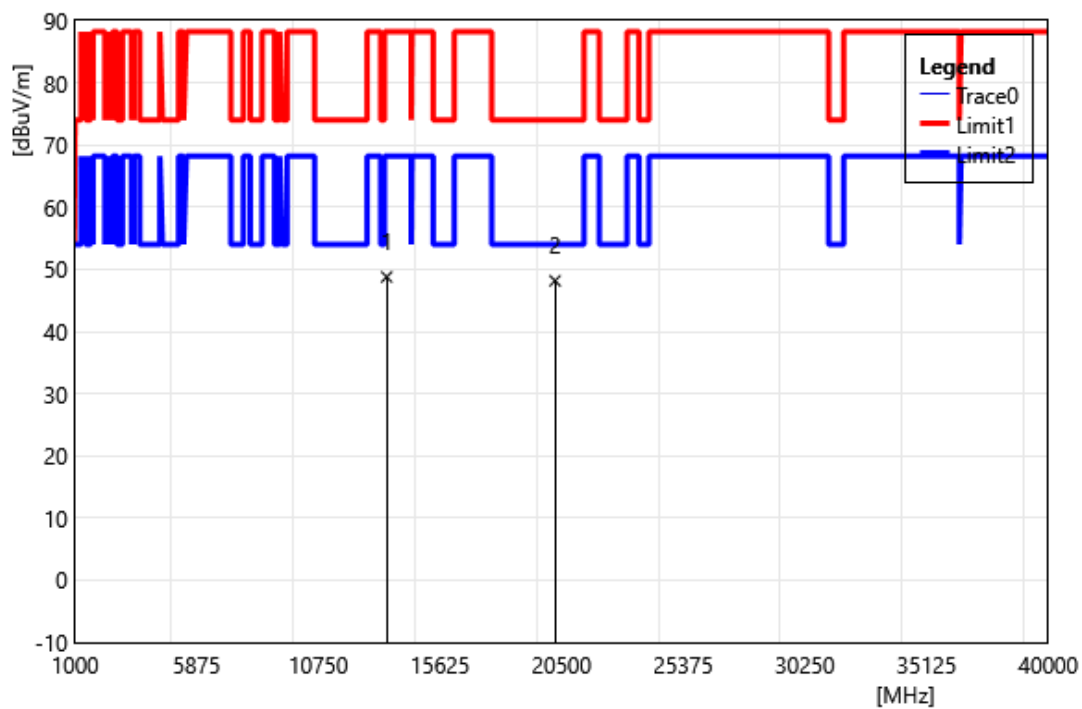


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	34.49	14.28	48.77	88.20	-39.43	PEAK
2	20235.00	31.73	16.43	48.16	74.00	-25.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745		
	MHz		
Polarization:	Horizontal		
Remark:			

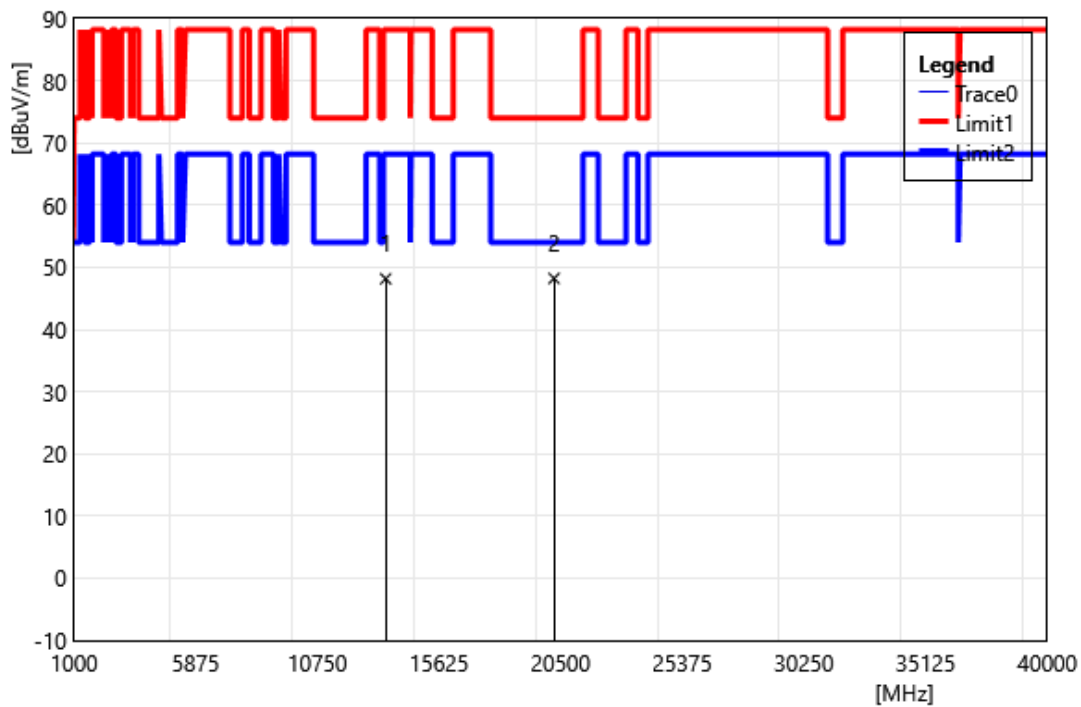


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	33.88	14.28	48.16	88.20	-40.04	PEAK
2	20235.00	31.79	16.43	48.22	74.00	-25.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Vertical		
Remark:			

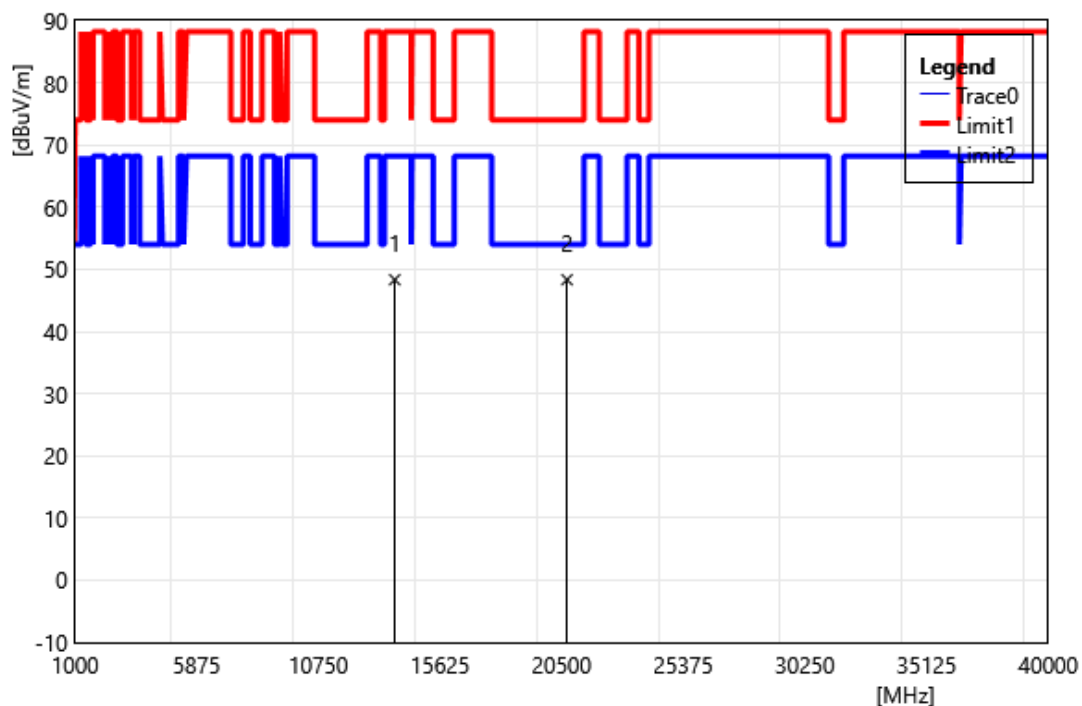


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	33.99	14.34	48.33	88.20	-39.87	PEAK
2	20715.00	31.55	16.78	48.33	74.00	-25.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Horizontal		
Remark:			

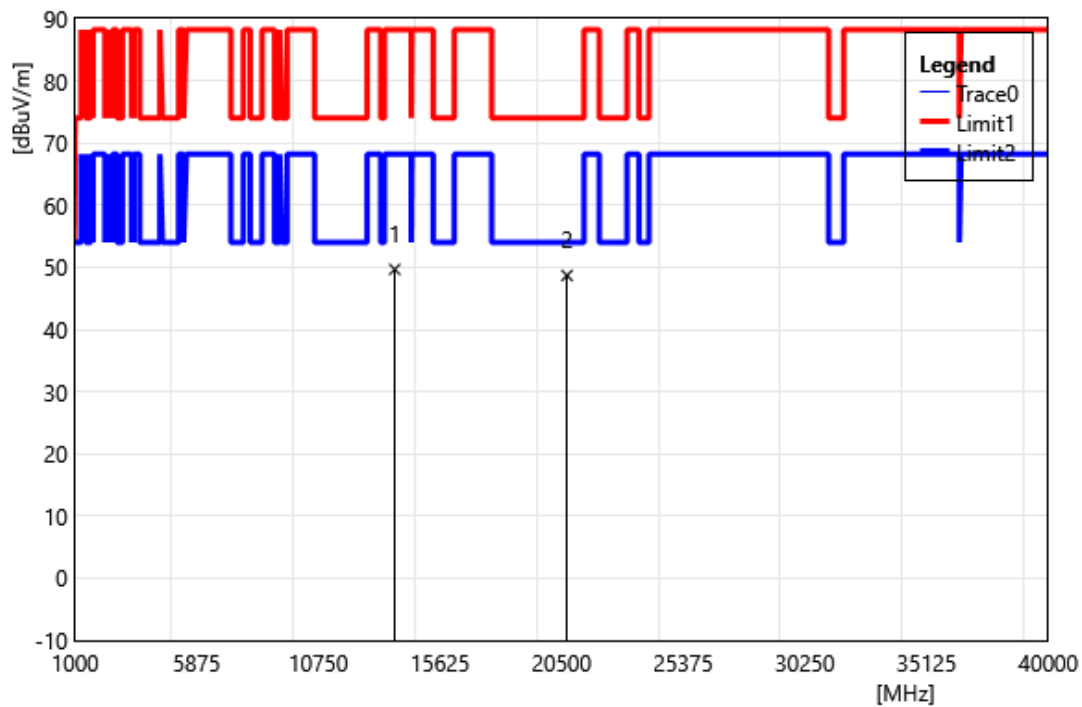


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13810.00	35.32	14.34	49.66	88.20	-38.54	PEAK
2	20715.00	31.91	16.78	48.69	74.00	-25.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	2.4G+5G+6G+BLE		
Polarization:	Vertical		
Remark:			

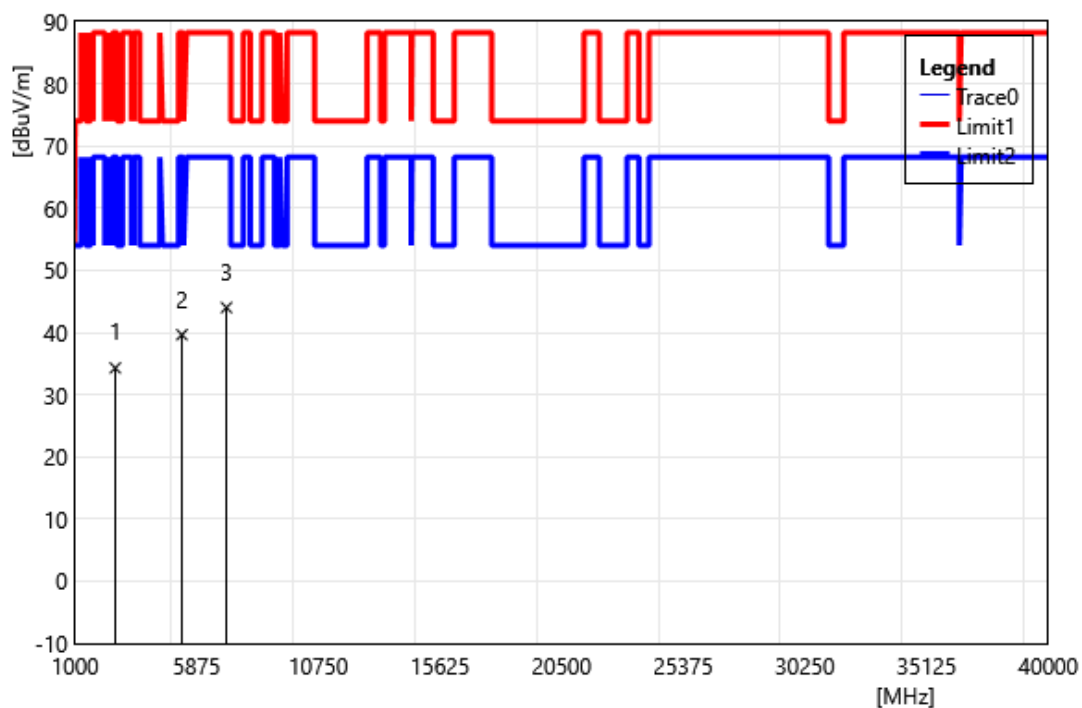

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2615.00	41.81	-7.50	34.31	88.20	-53.89	PEAK
2	5284.00	41.24	-1.60	39.64	88.20	-48.56	PEAK
3	7069.00	39.36	4.65	44.01	88.20	-44.19	PEAK


Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	2.4G+5G+6G+BLE		
Polarization:	Horizontal		
Remark:			

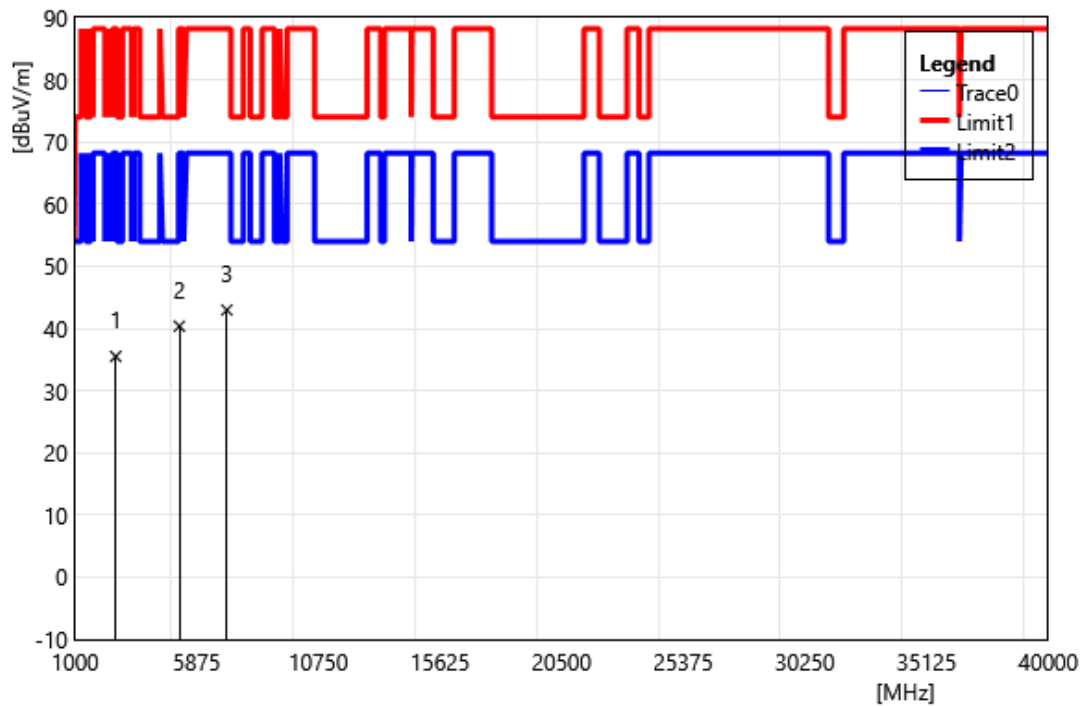

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2632.00	42.92	-7.41	35.51	88.20	-52.69	PEAK
2	5182.00	41.44	-1.07	40.37	88.20	-47.83	PEAK
3	7086.00	38.17	4.80	42.97	88.20	-45.23	PEAK


1X1- Band Edge

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

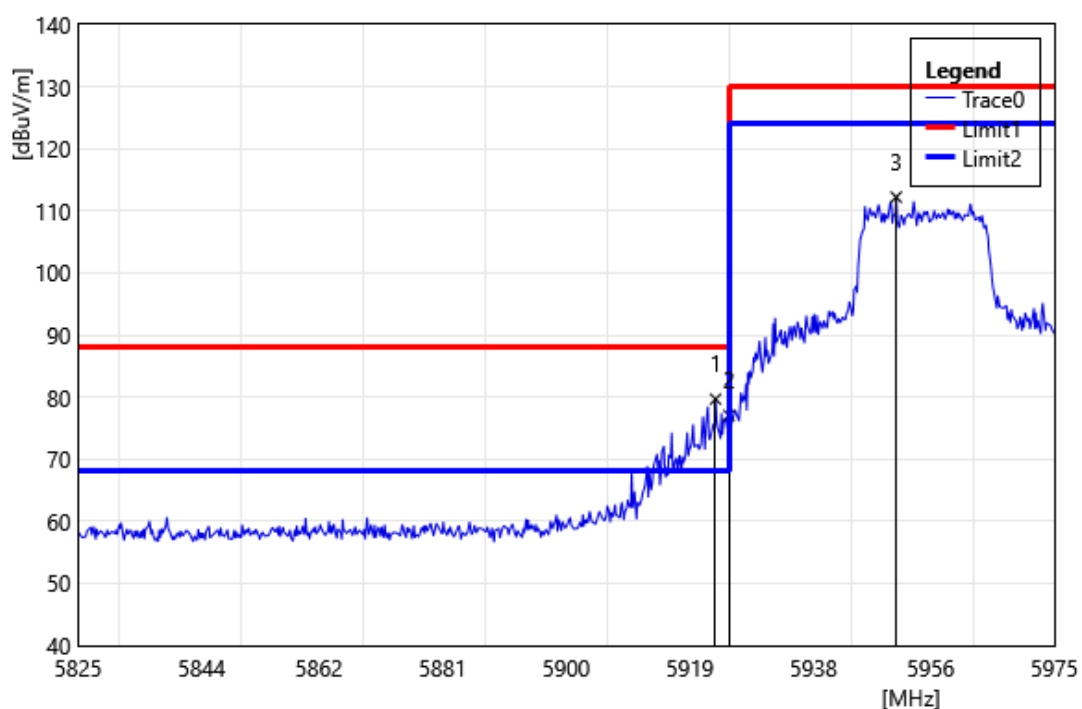


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.95	79.00	0.69	79.69	88.20	-8.51	PEAK
2	5925.00	76.37	0.68	77.05	88.20	-11.15	PEAK
3	5950.70	111.65	0.57	112.22	130.00	-17.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

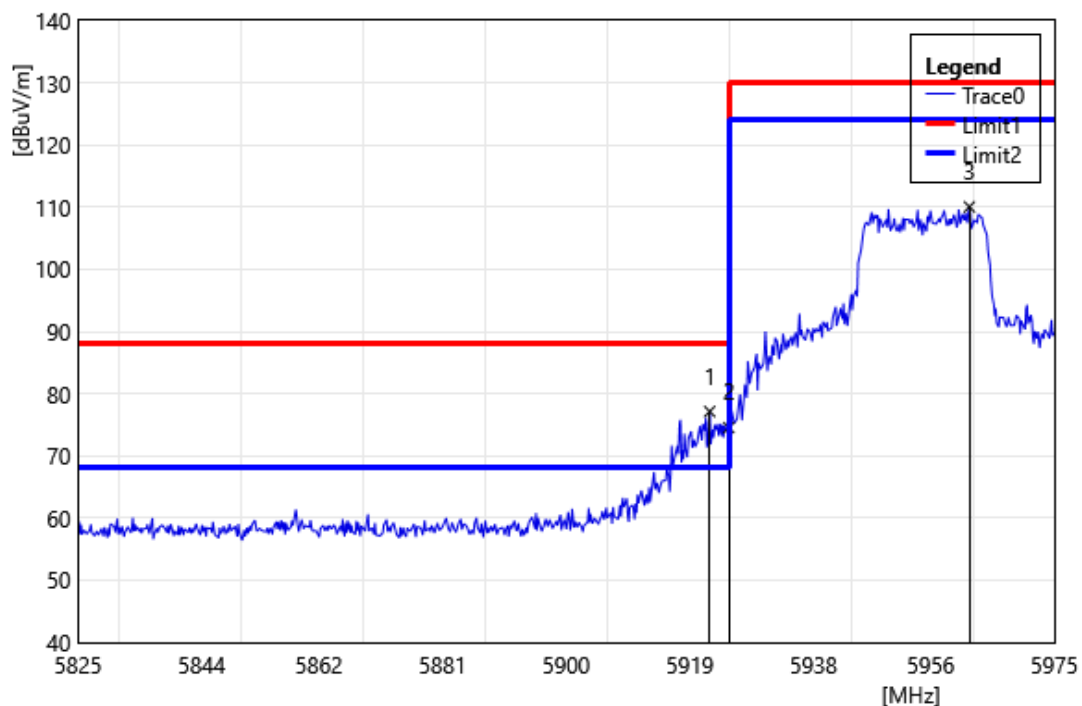


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.05	76.43	0.70	77.13	88.20	-11.07	PEAK
2	5925.00	73.86	0.68	74.54	88.20	-13.66	PEAK
3	5961.95	109.45	0.60	110.05	130.00	-19.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

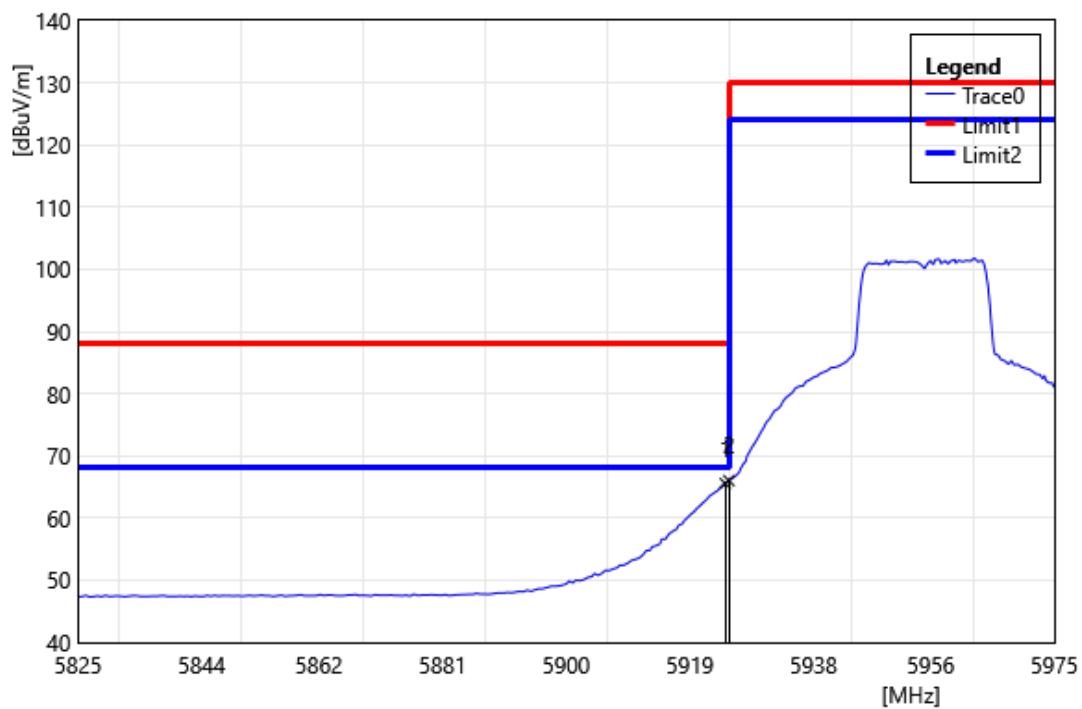


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.45	64.87	0.69	65.56	68.20	-2.64	AVG
2	5925.00	65.34	0.68	66.02	68.20	-2.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

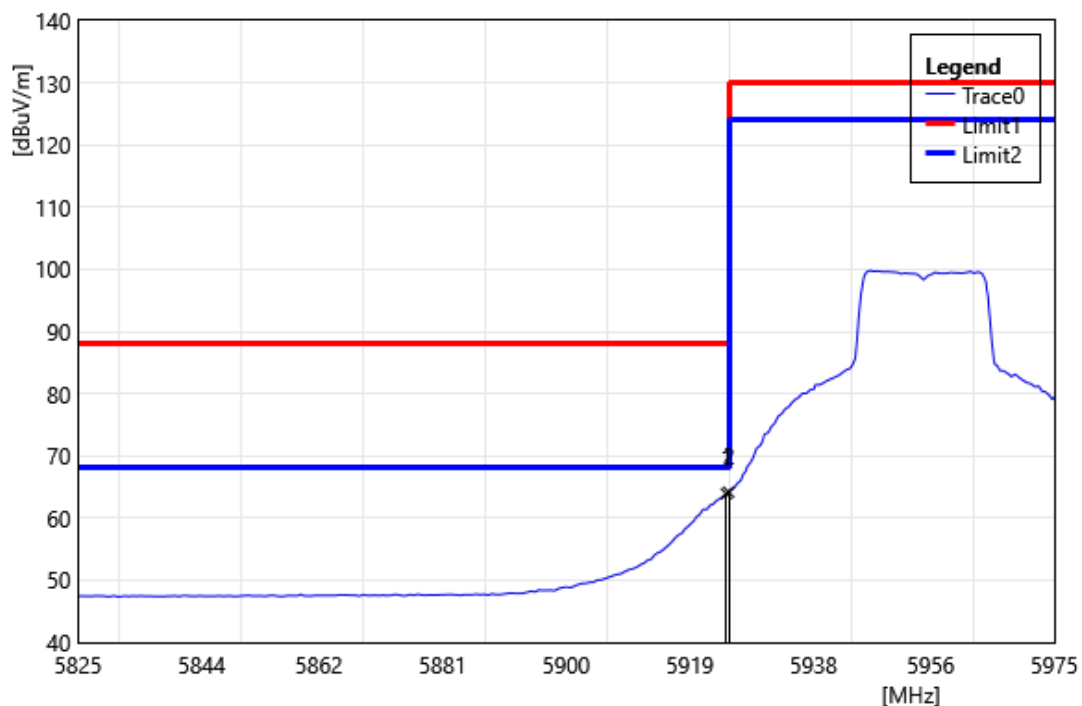


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.60	63.22	0.69	63.92	68.20	-4.29	AVG
2	5925.00	63.49	0.68	64.17	68.20	-4.03	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

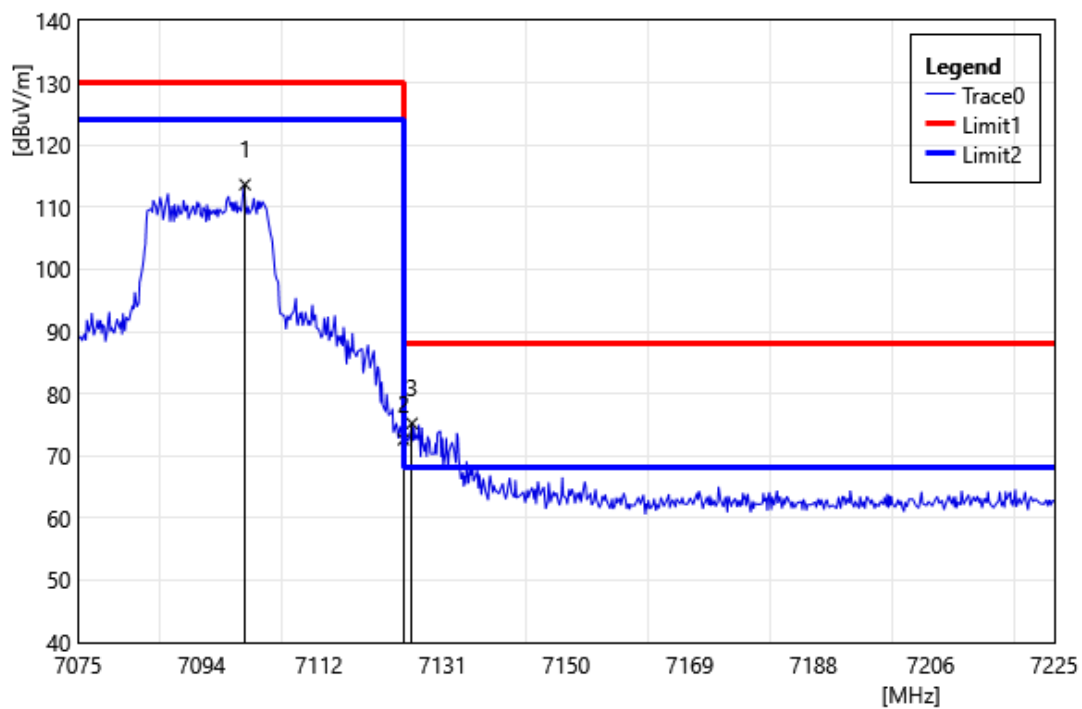


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7100.65	108.71	4.92	113.63	130.00	-16.37	PEAK
2	7125.00	67.64	4.98	72.62	88.20	-15.58	PEAK
3	7126.30	70.25	4.98	75.23	88.20	-12.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

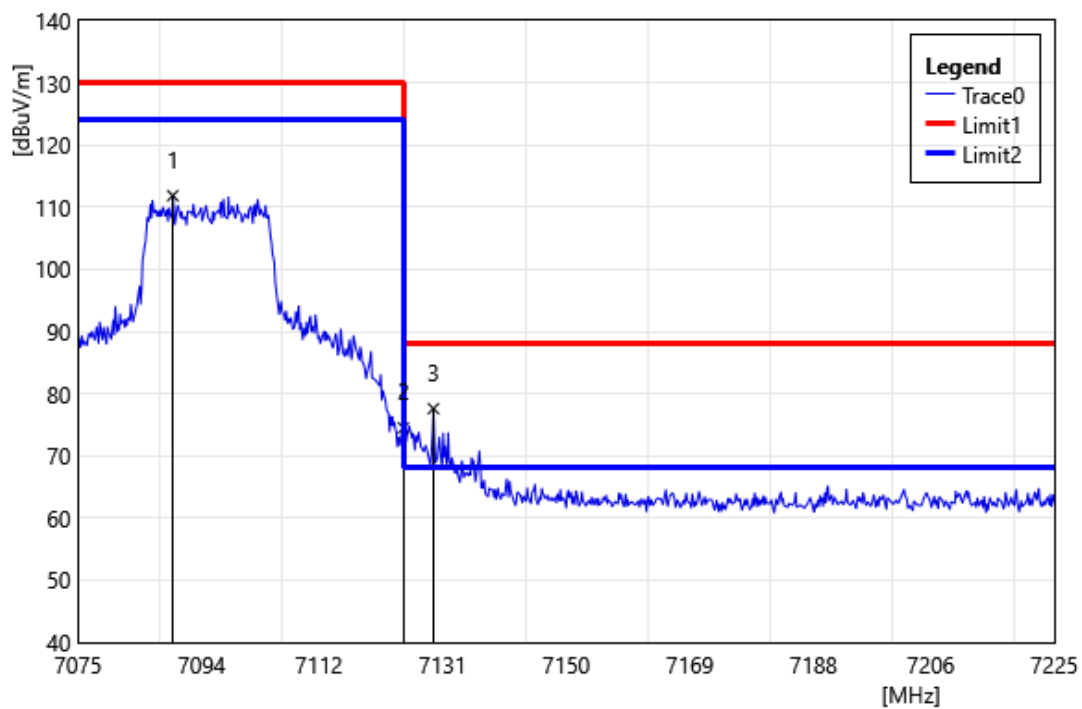


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7089.55	107.02	4.83	111.85	130.00	-18.15	PEAK
2	7125.00	69.54	4.98	74.52	88.20	-13.68	PEAK
3	7129.60	72.60	4.99	77.60	88.20	-10.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

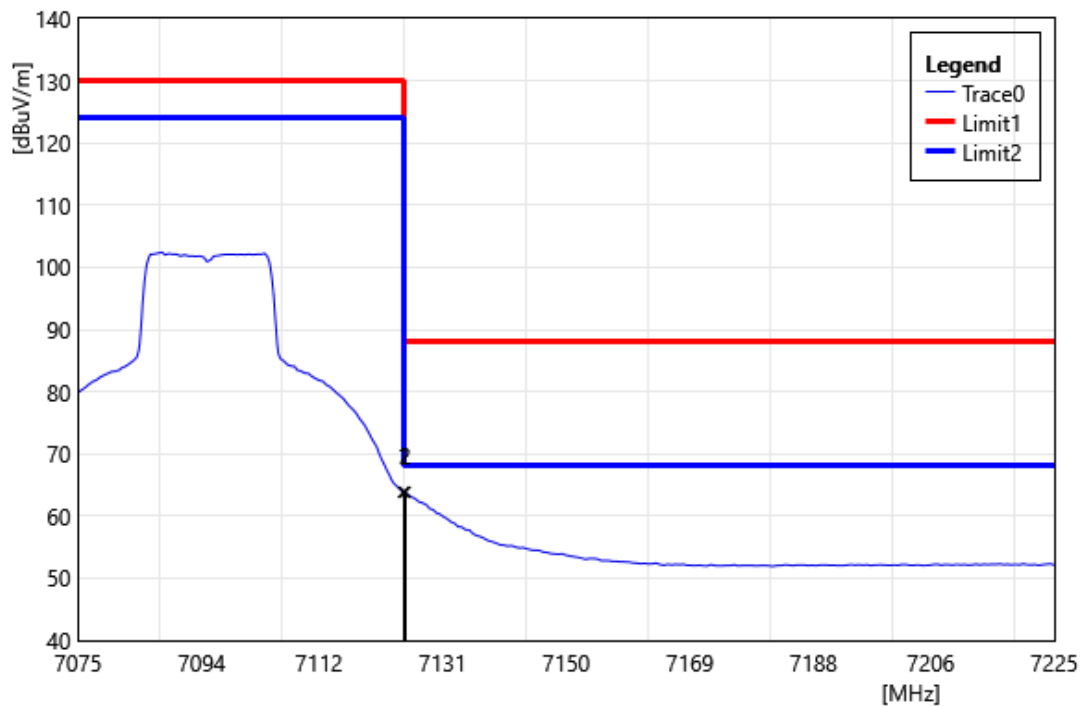


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	58.87	4.98	63.85	68.20	-4.35	AVG
2	7125.25	58.85	4.98	63.83	68.20	-4.37	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

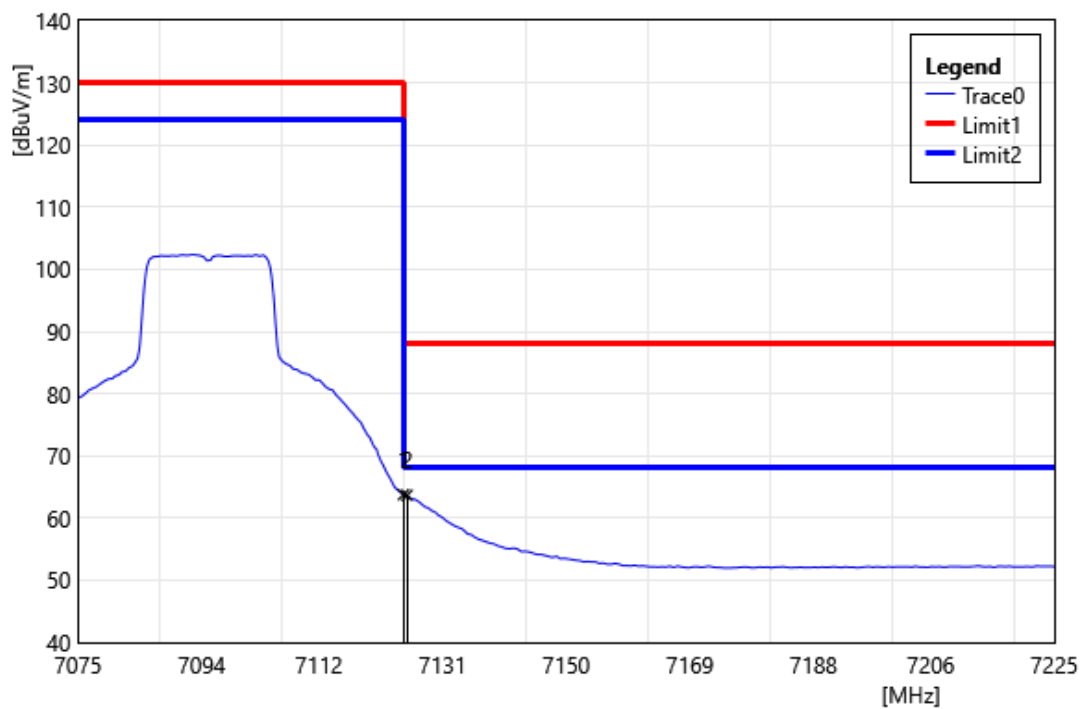


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	58.79	4.98	63.77	68.20	-4.43	AVG
2	7125.55	58.70	4.98	63.68	68.20	-4.52	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

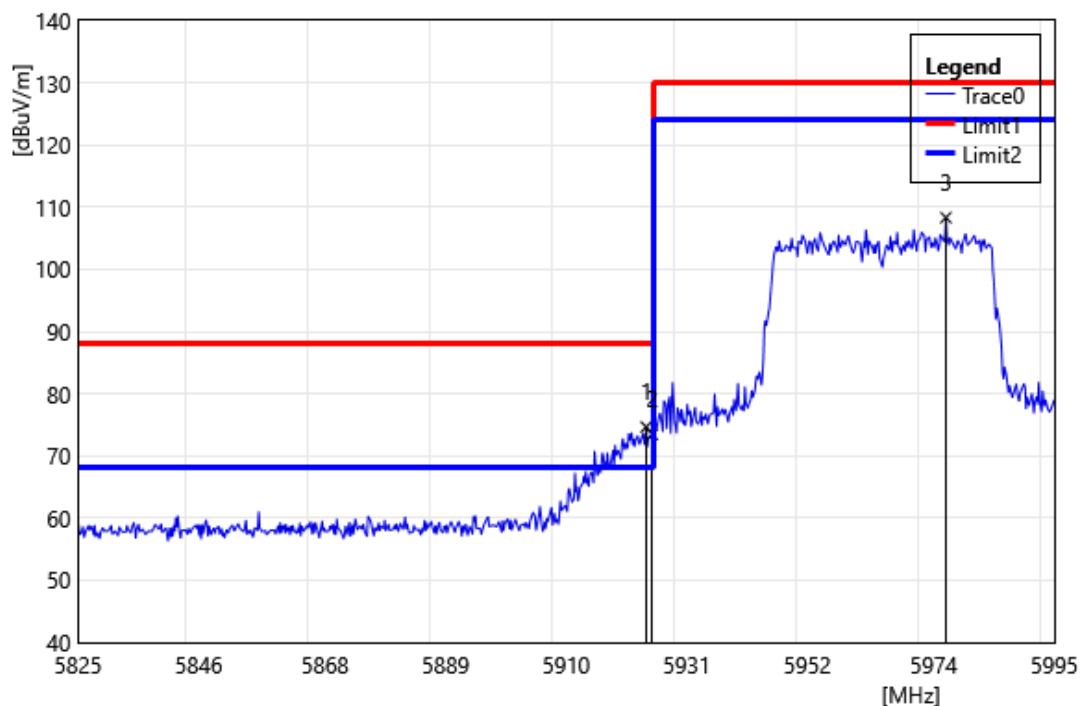


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.94	73.96	0.69	74.65	88.20	-13.55	PEAK
2	5925.00	72.77	0.68	73.45	88.20	-14.75	PEAK
3	5976.13	107.67	0.64	108.31	130.00	-21.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

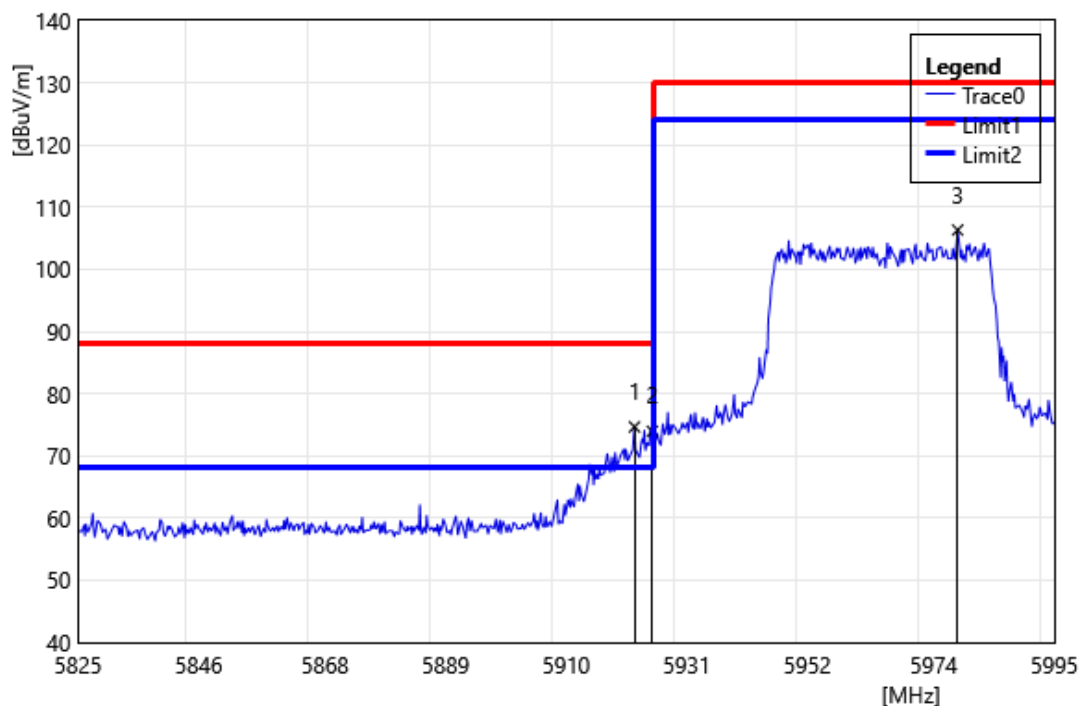


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.90	73.97	0.70	74.67	88.20	-13.53	PEAK
2	5925.00	73.28	0.68	73.96	88.20	-14.24	PEAK
3	5978.17	105.68	0.65	106.33	130.00	-23.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

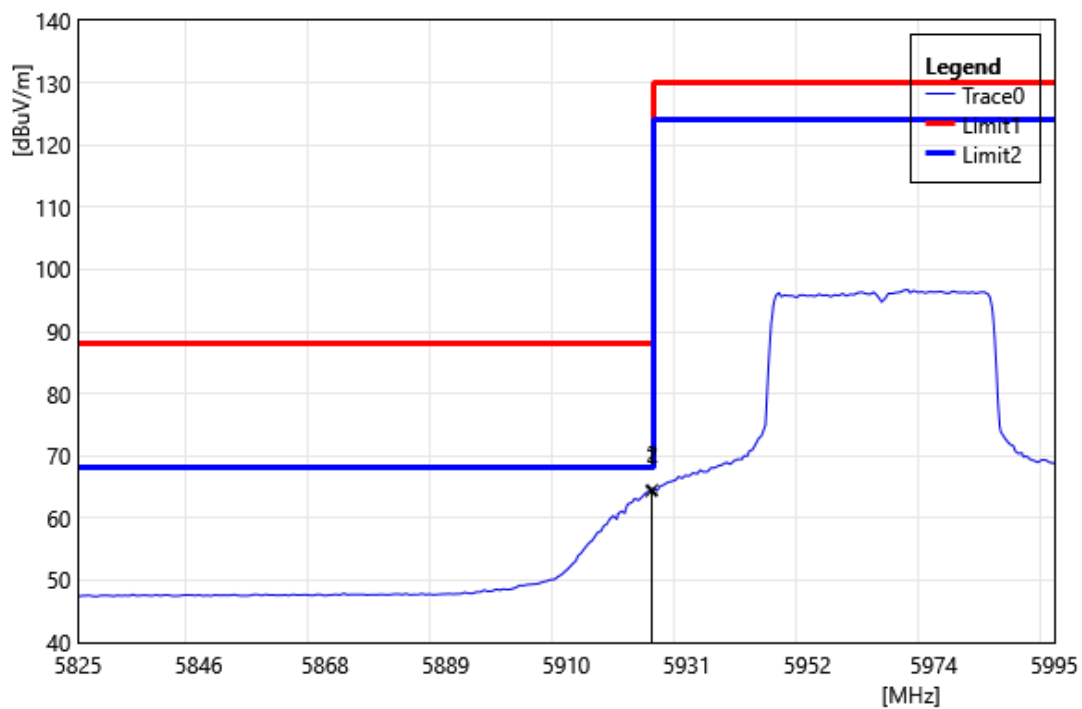


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.79	63.63	0.69	64.32	68.20	-3.88	AVG
2	5925.00	63.86	0.68	64.54	68.20	-3.66	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

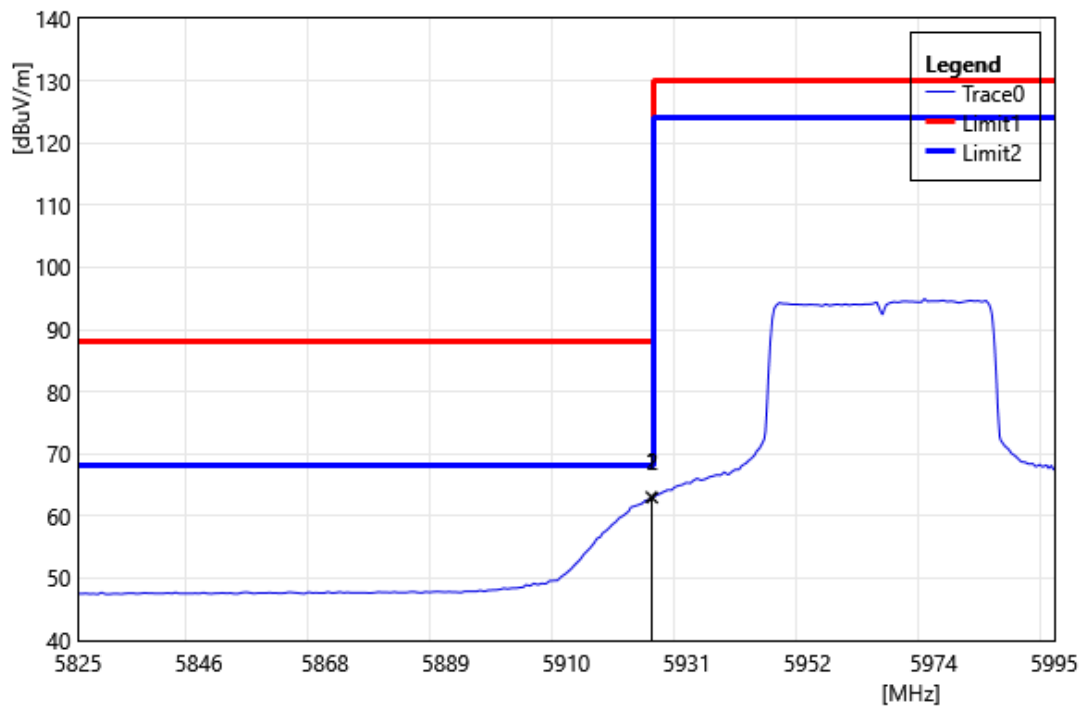


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.79	62.38	0.69	63.07	68.20	-5.13	AVG
2	5925.00	62.27	0.68	62.95	68.20	-5.25	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

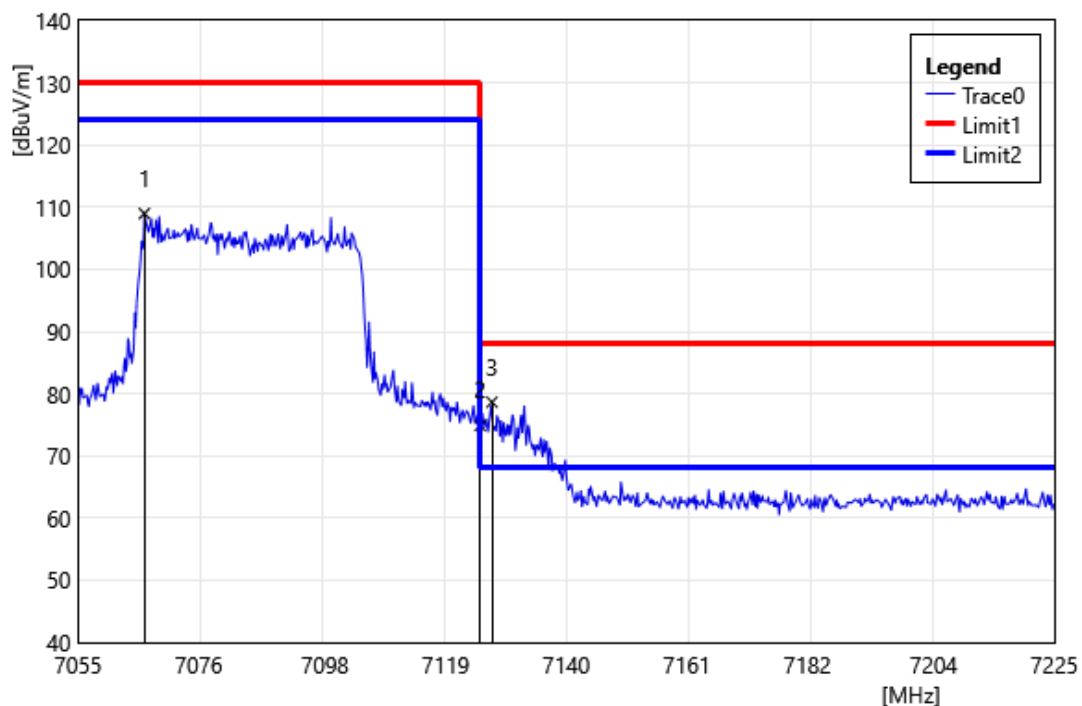


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7066.56	104.35	4.63	108.98	130.00	-21.02	PEAK
2	7125.00	69.90	4.98	74.88	88.20	-13.32	PEAK
3	7127.08	73.65	4.99	78.64	88.20	-9.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

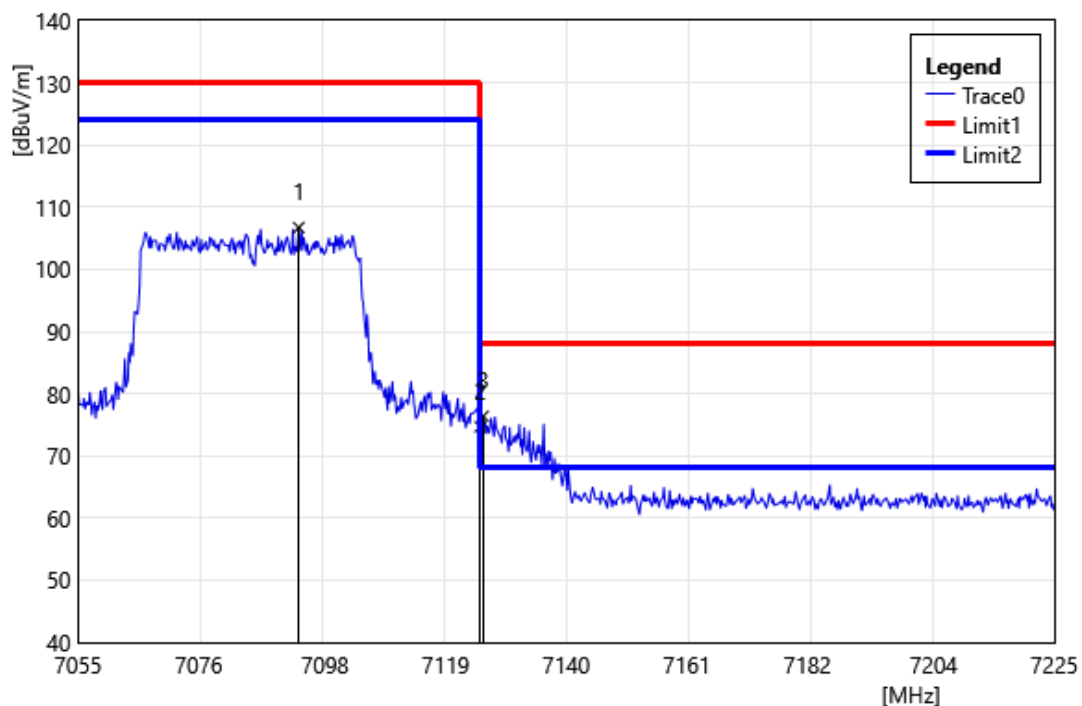


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7093.42	101.86	4.86	106.72	130.00	-23.28	PEAK
2	7125.00	69.70	4.98	74.68	88.20	-13.52	PEAK
3	7125.55	71.40	4.98	76.38	88.20	-11.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

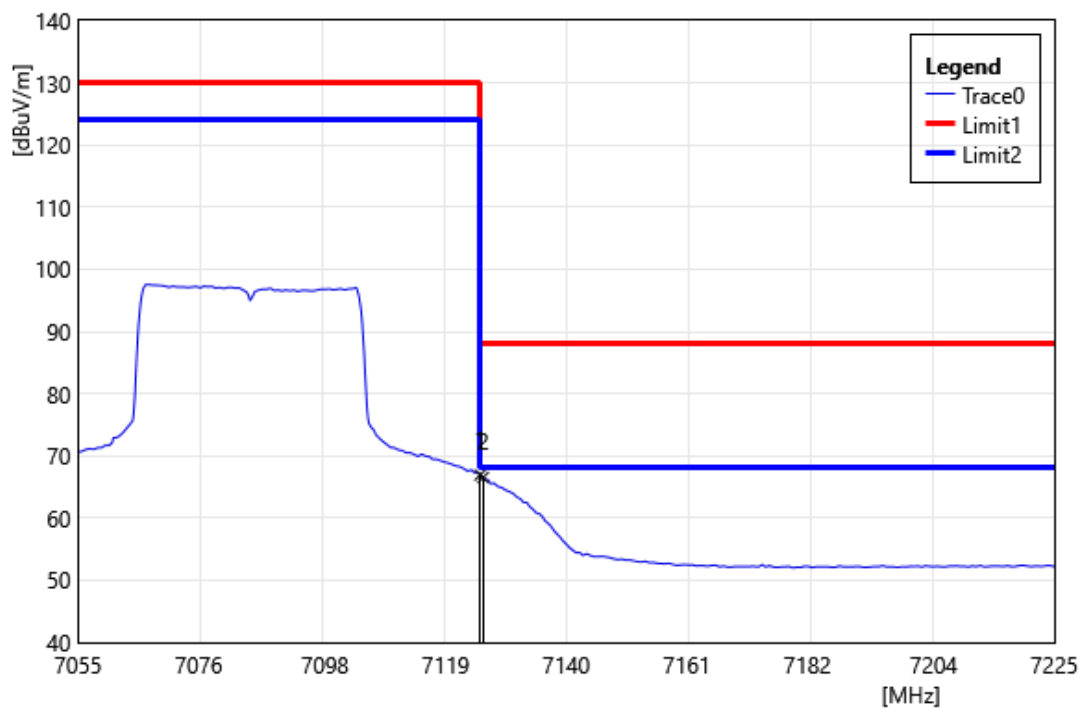


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.93	4.98	66.91	68.20	-1.29	AVG
2	7125.55	61.55	4.98	66.53	68.20	-1.67	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Horizontal		
Remark:			

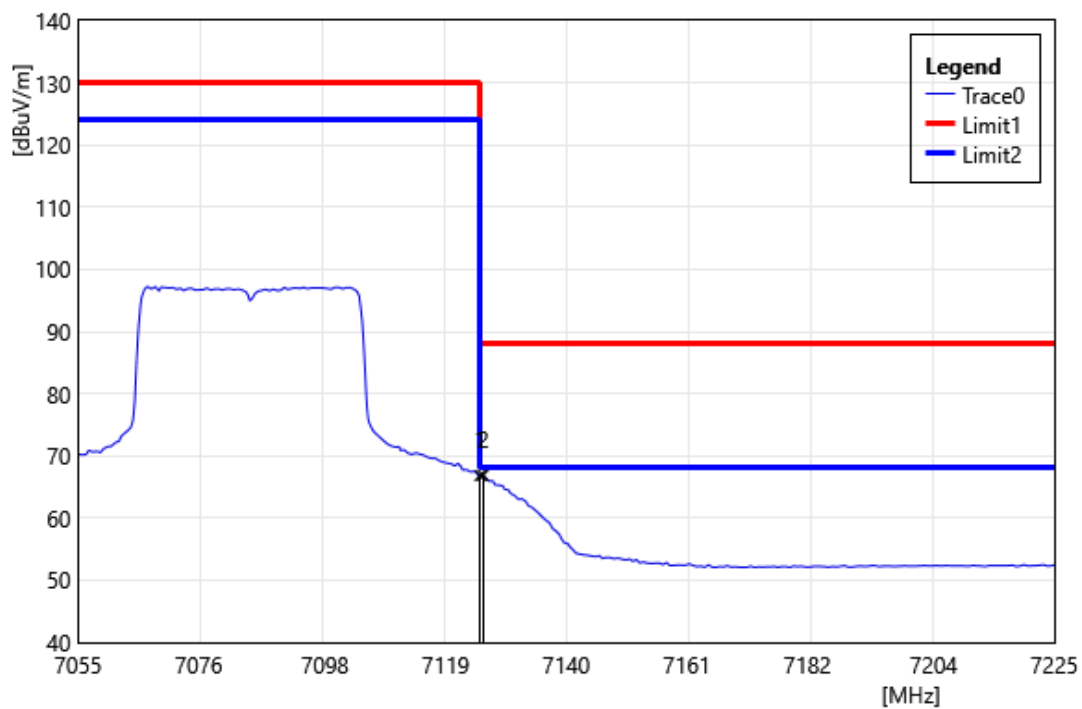


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.86	4.98	66.84	68.20	-1.36	AVG
2	7125.55	61.90	4.98	66.88	68.20	-1.32	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

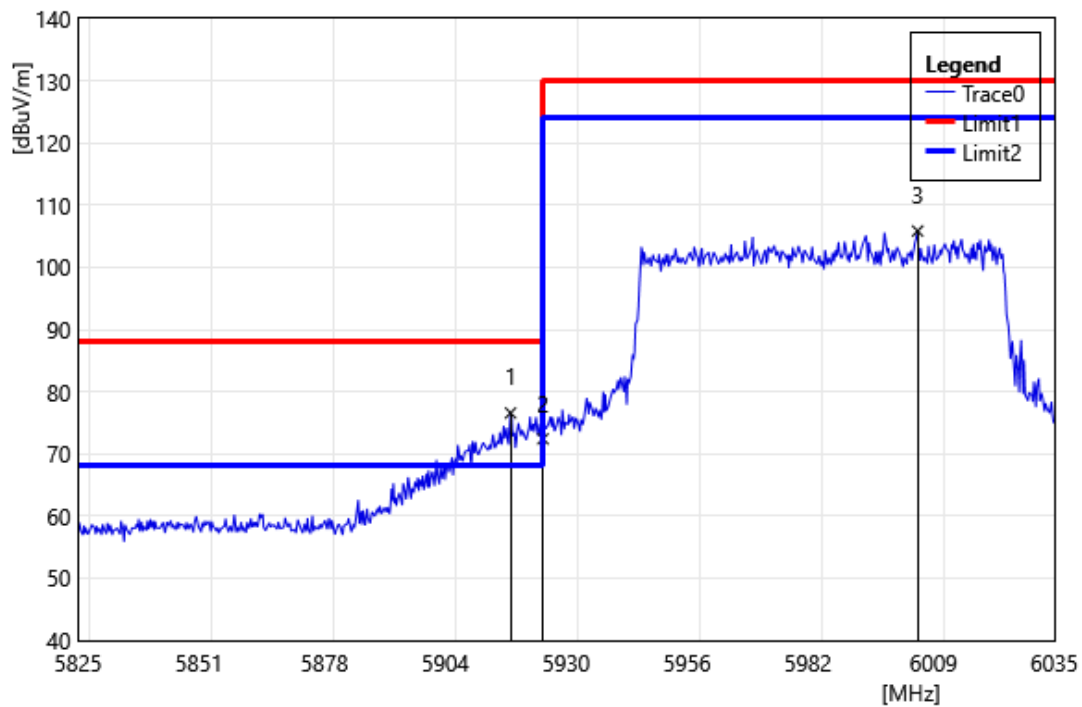


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.03	75.86	0.72	76.58	88.20	-11.62	PEAK
2	5925.00	71.72	0.68	72.40	88.20	-15.80	PEAK
3	6005.60	105.10	0.74	105.84	130.00	-24.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

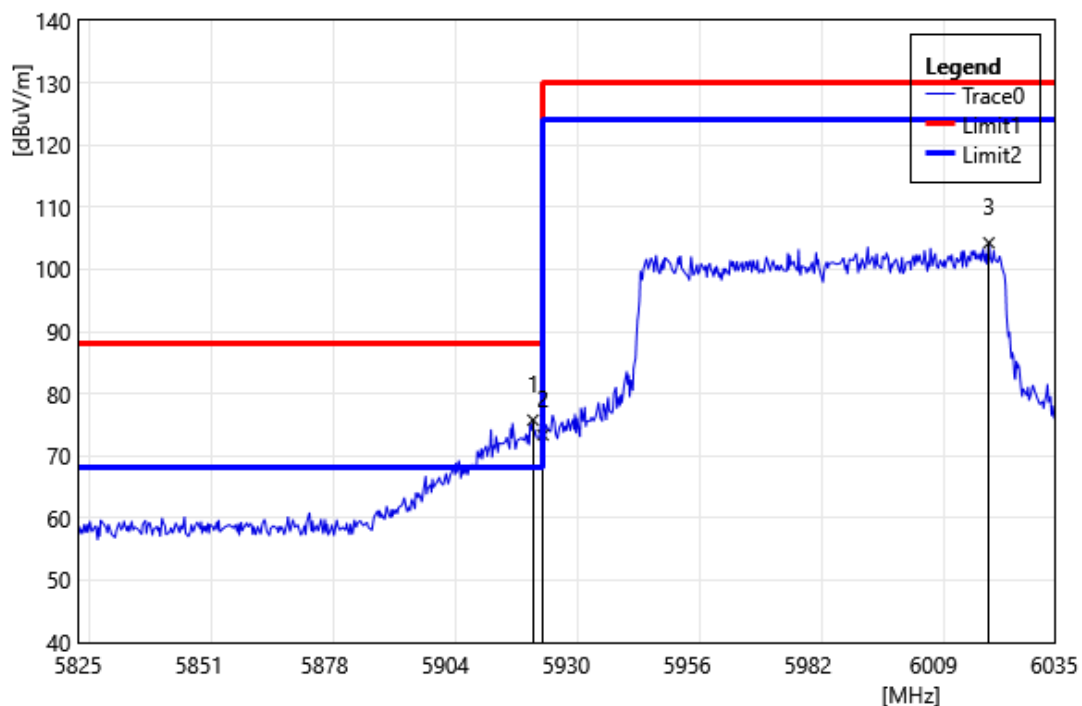


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.86	75.06	0.69	75.76	88.20	-12.45	PEAK
2	5925.00	72.68	0.68	73.36	88.20	-14.84	PEAK
3	6020.93	103.48	0.78	104.26	130.00	-25.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

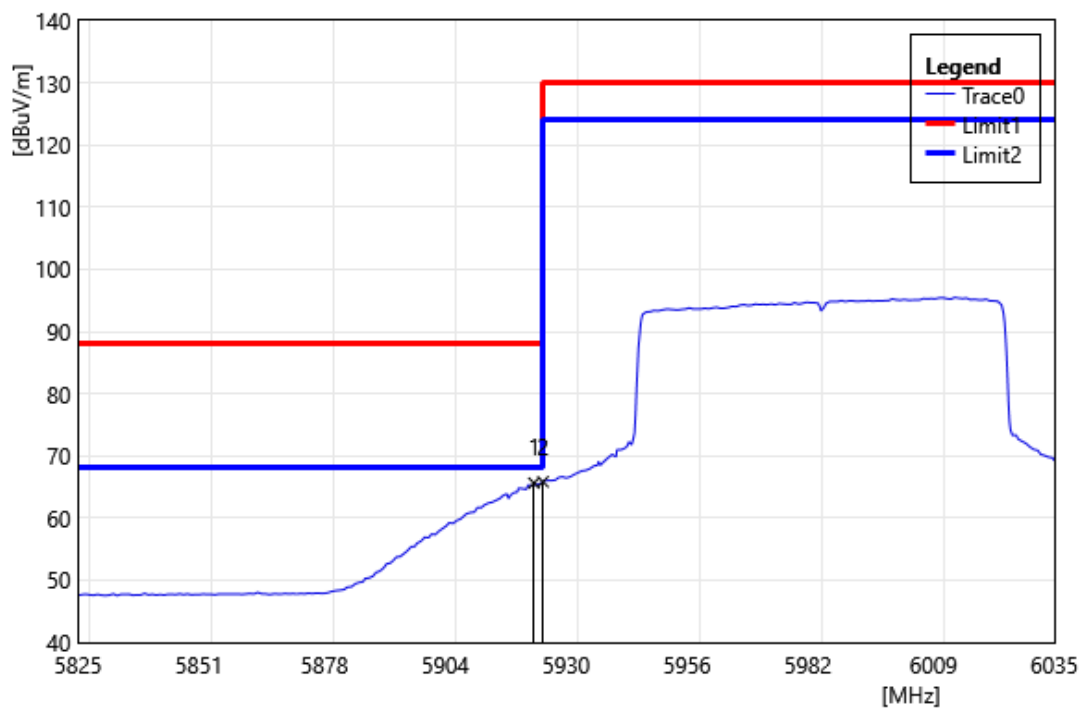


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.07	64.94	0.69	65.63	68.20	-2.57	AVG
2	5925.00	65.16	0.68	65.84	68.20	-2.36	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

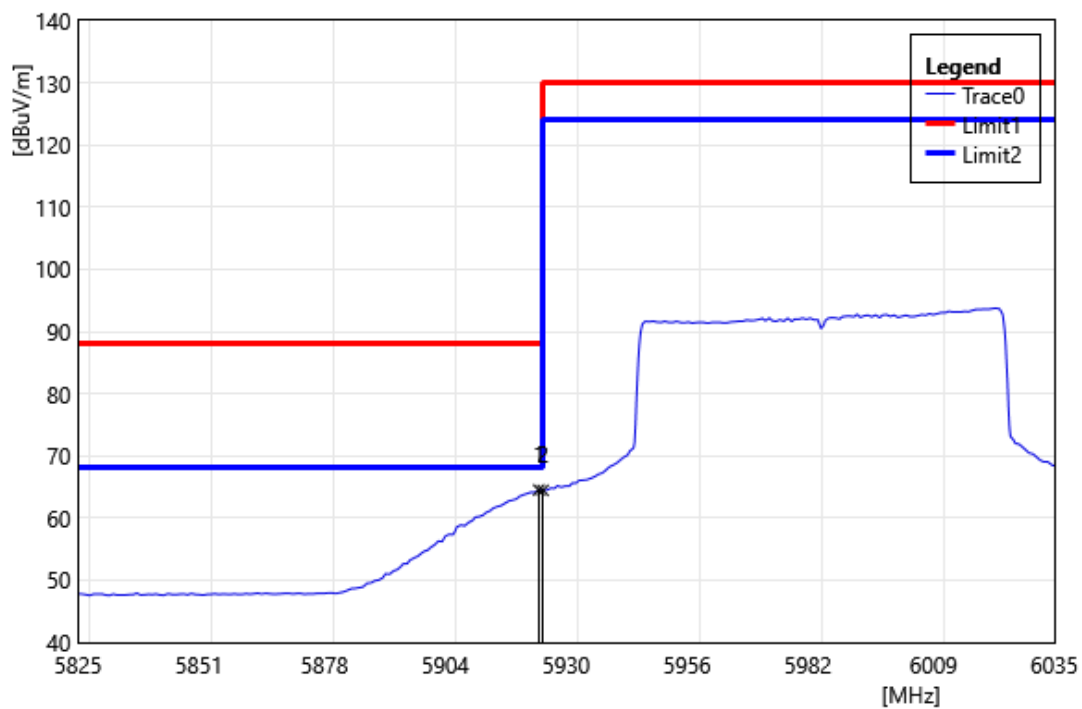

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.12	63.82	0.69	64.51	68.20	-3.69	AVG
2	5925.00	63.78	0.68	64.46	68.20	-3.74	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

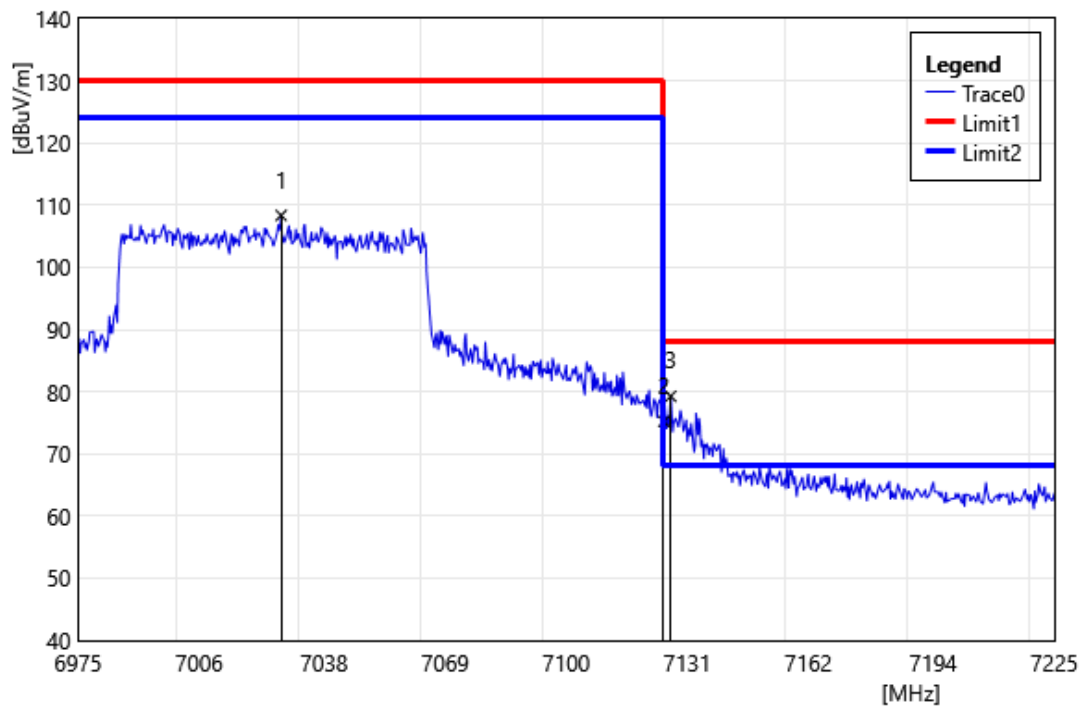

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7027.00	104.02	4.33	108.36	130.00	-21.65	PEAK
2	7125.00	70.25	4.98	75.23	88.20	-12.97	PEAK
3	7126.75	74.28	4.99	79.27	88.20	-8.93	PEAK