



Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

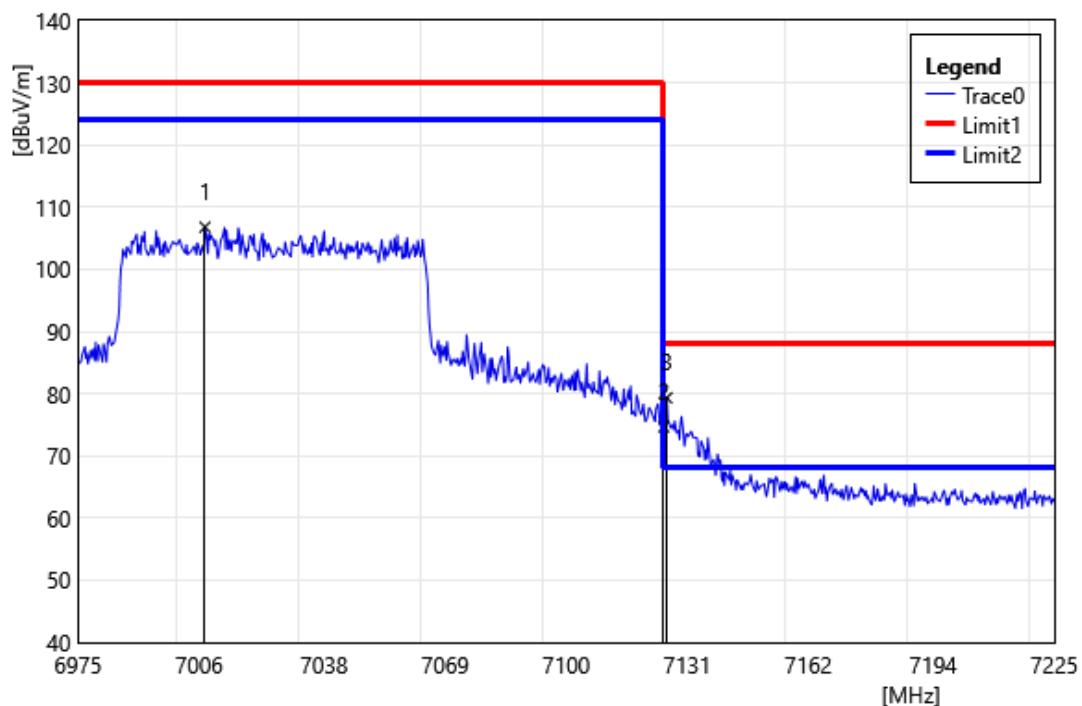


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7007.50	102.58	4.21	106.79	130.00	-23.21	PEAK
2	7125.00	69.70	4.98	74.68	88.20	-13.52	PEAK
3	7125.75	74.34	4.98	79.33	88.20	-8.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

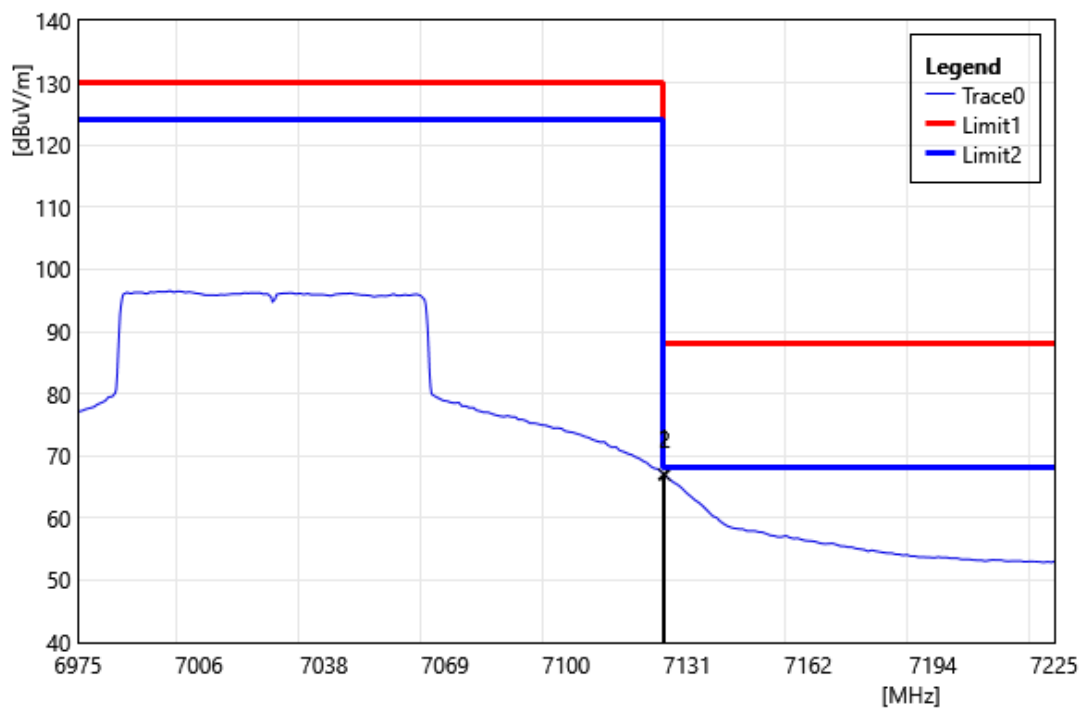


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	62.09	4.98	67.07	68.20	-1.13	AVG
2	7125.25	61.92	4.98	66.91	68.20	-1.30	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

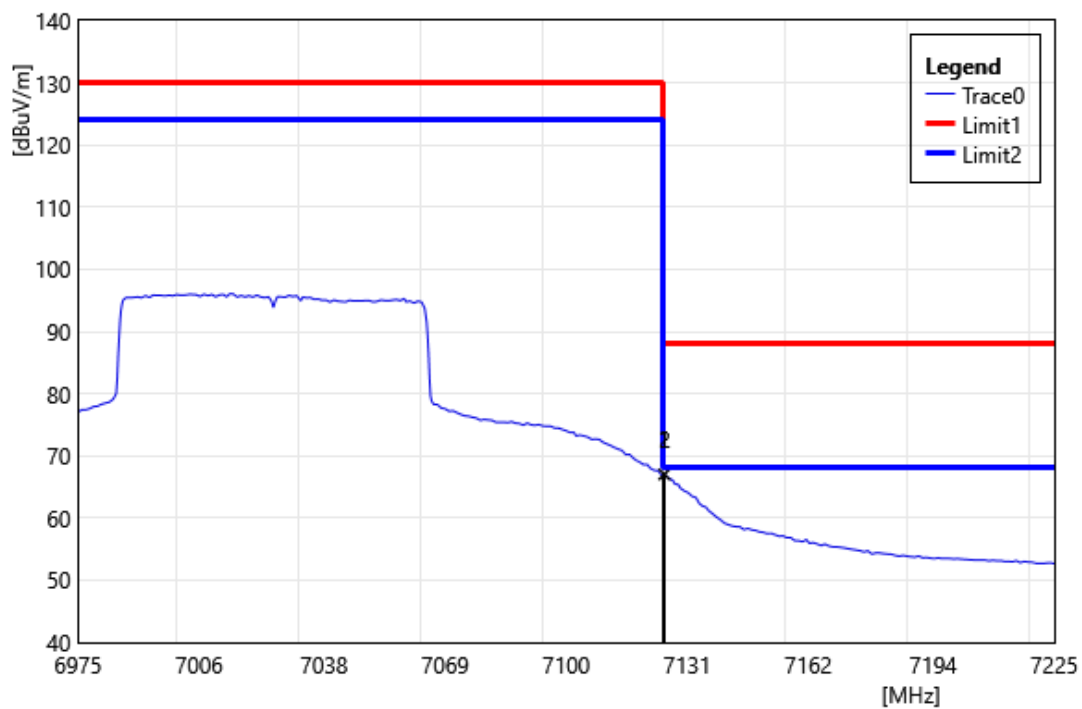


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	62.06	4.98	67.04	68.20	-1.16	AVG
2	7125.25	62.04	4.98	67.02	68.20	-1.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

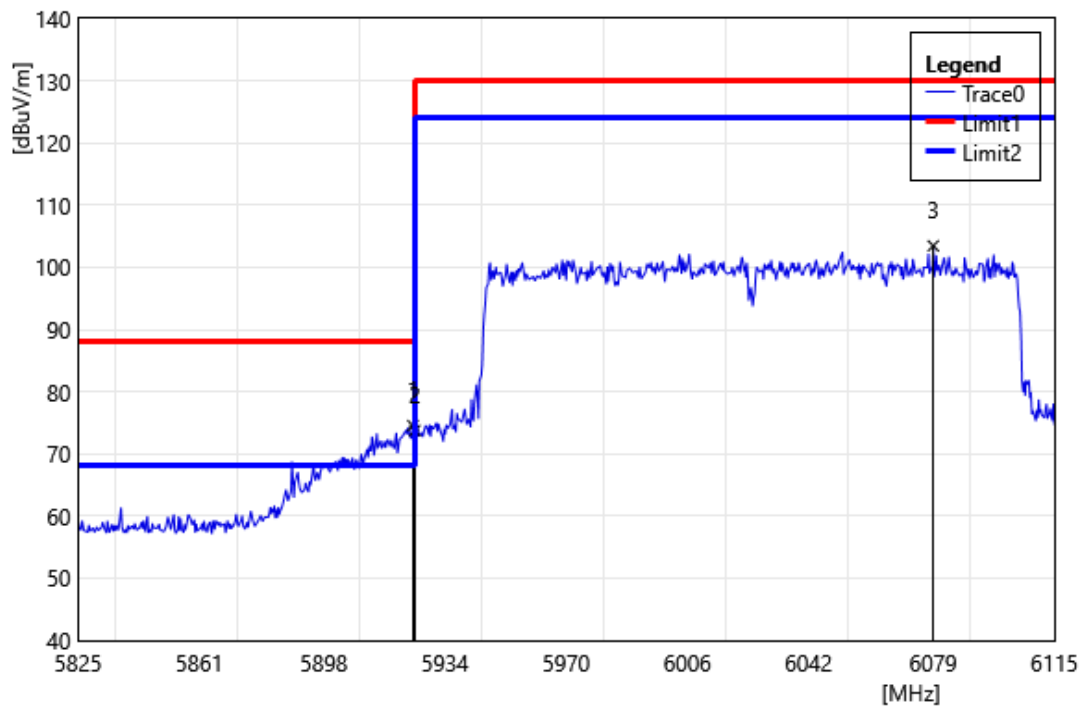


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.47	73.86	0.69	74.55	88.20	-13.66	PEAK
2	5925.00	73.06	0.68	73.74	88.20	-14.46	PEAK
3	6079.04	102.48	0.99	103.47	130.00	-26.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

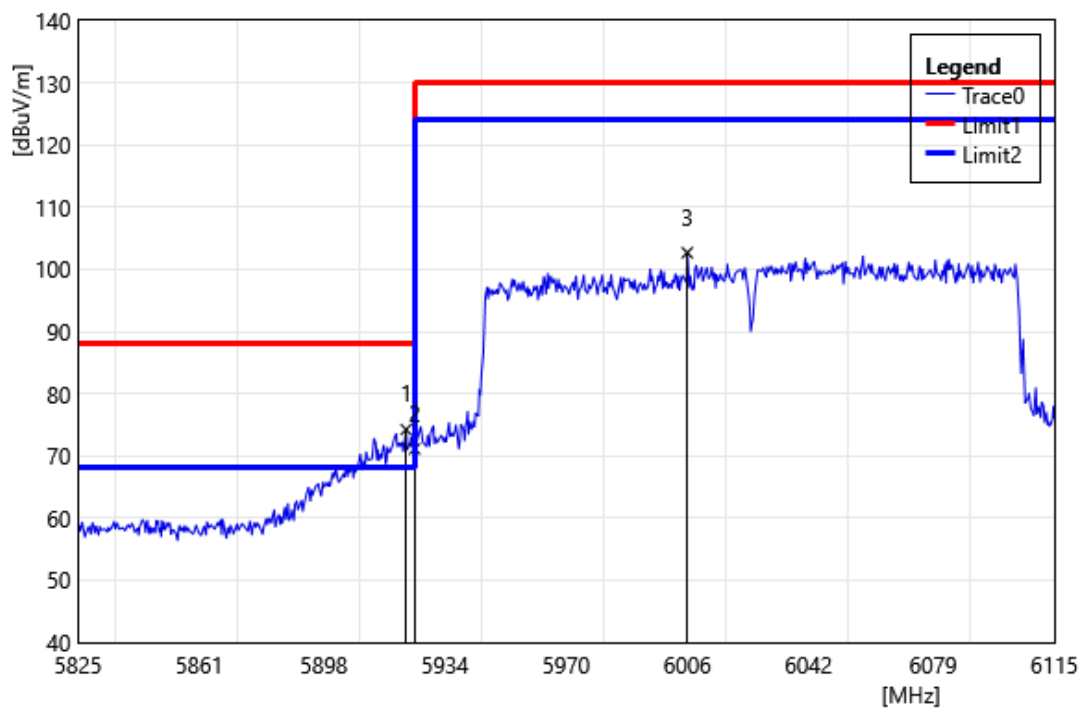


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.44	73.54	0.70	74.24	88.20	-13.96	PEAK
2	5925.00	70.47	0.68	71.15	88.20	-17.05	PEAK
3	6005.96	101.93	0.74	102.67	130.00	-27.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

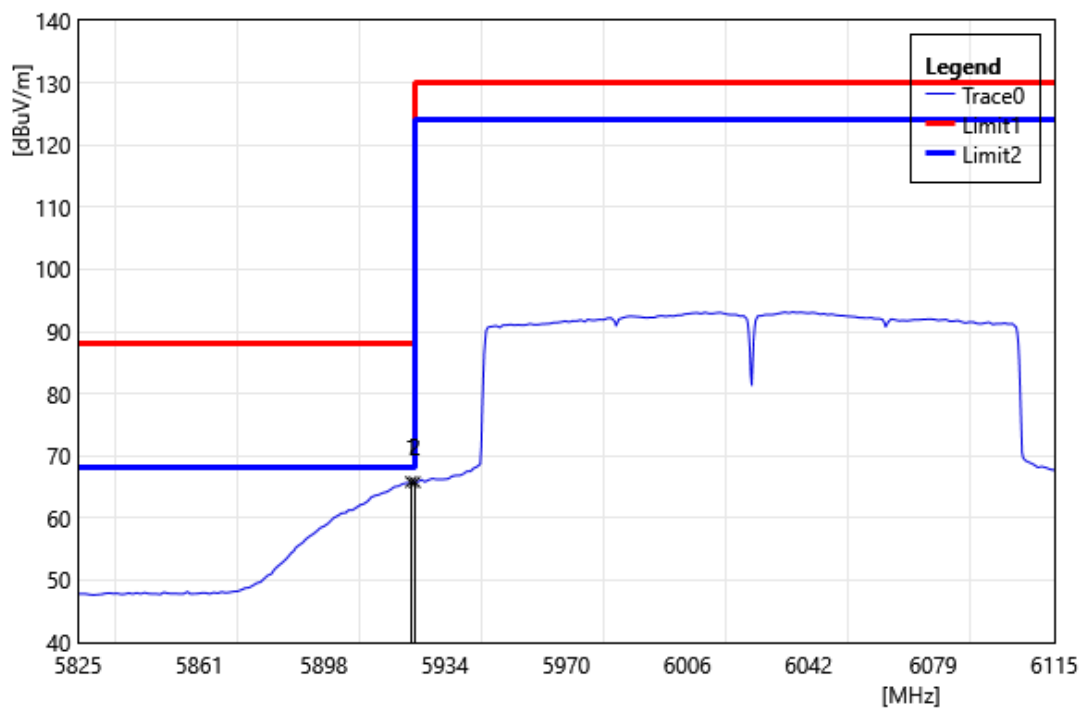


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.89	65.11	0.69	65.80	68.20	-2.40	AVG
2	5925.00	65.09	0.68	65.77	68.20	-2.43	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

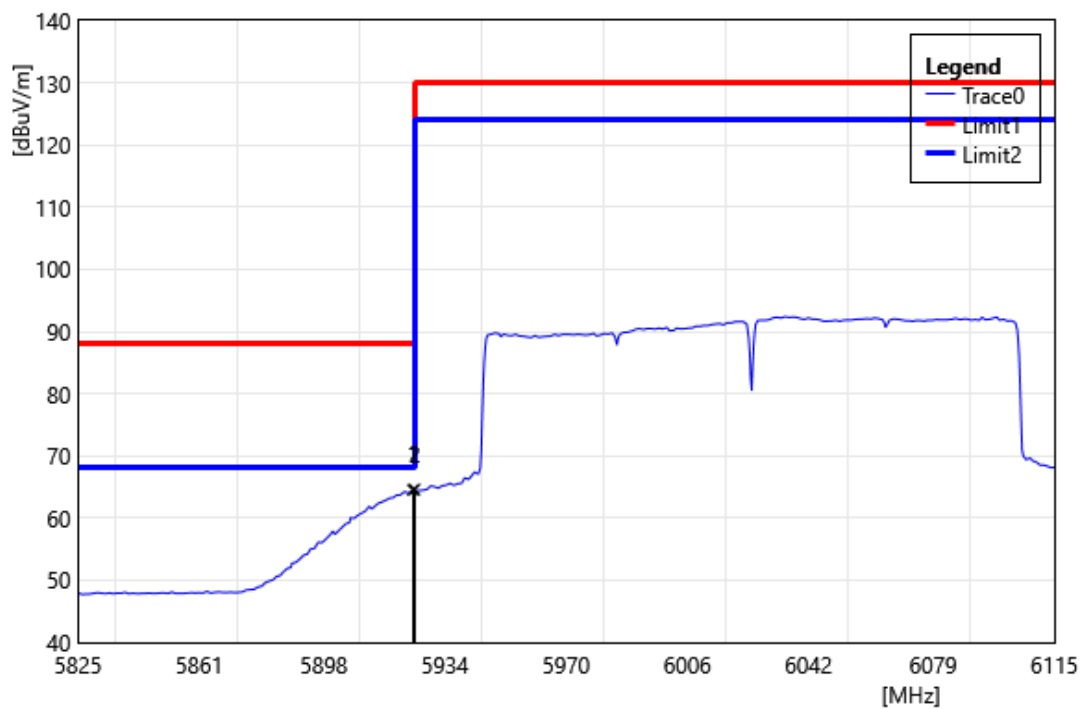


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.47	63.83	0.69	64.52	68.20	-3.68	AVG
2	5925.00	63.91	0.68	64.59	68.20	-3.61	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

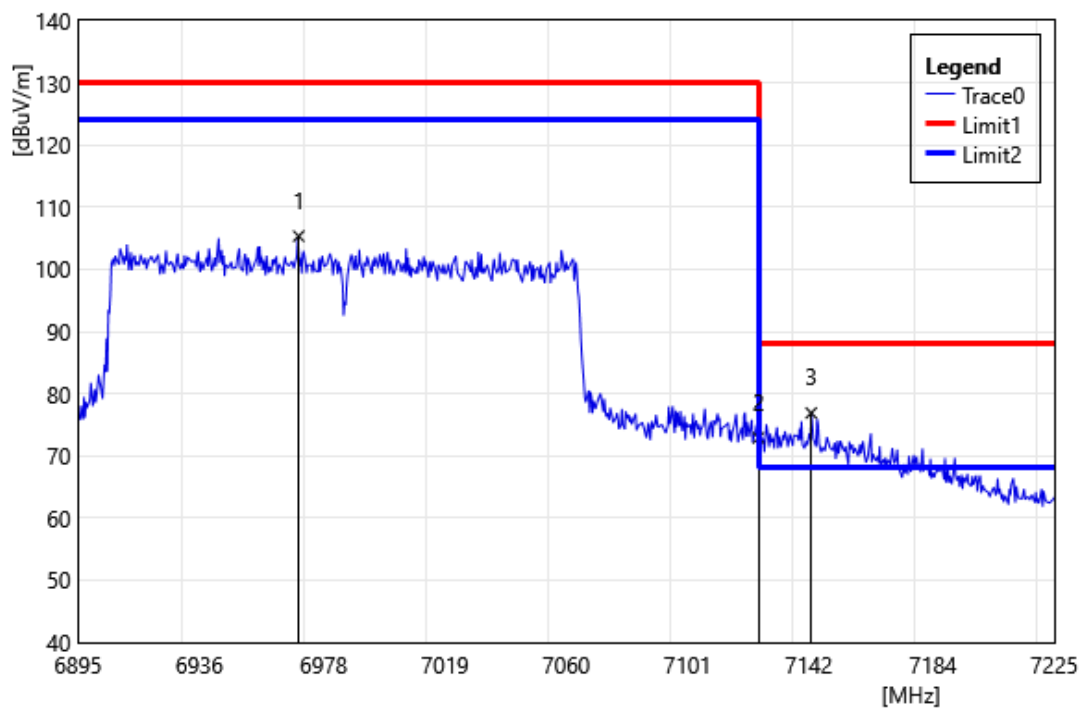


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6969.58	101.28	4.07	105.35	130.00	-24.65	PEAK
2	7125.00	67.93	4.98	72.91	88.20	-15.29	PEAK
3	7142.83	71.87	5.03	76.90	88.20	-11.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Horizontal		
Remark:			

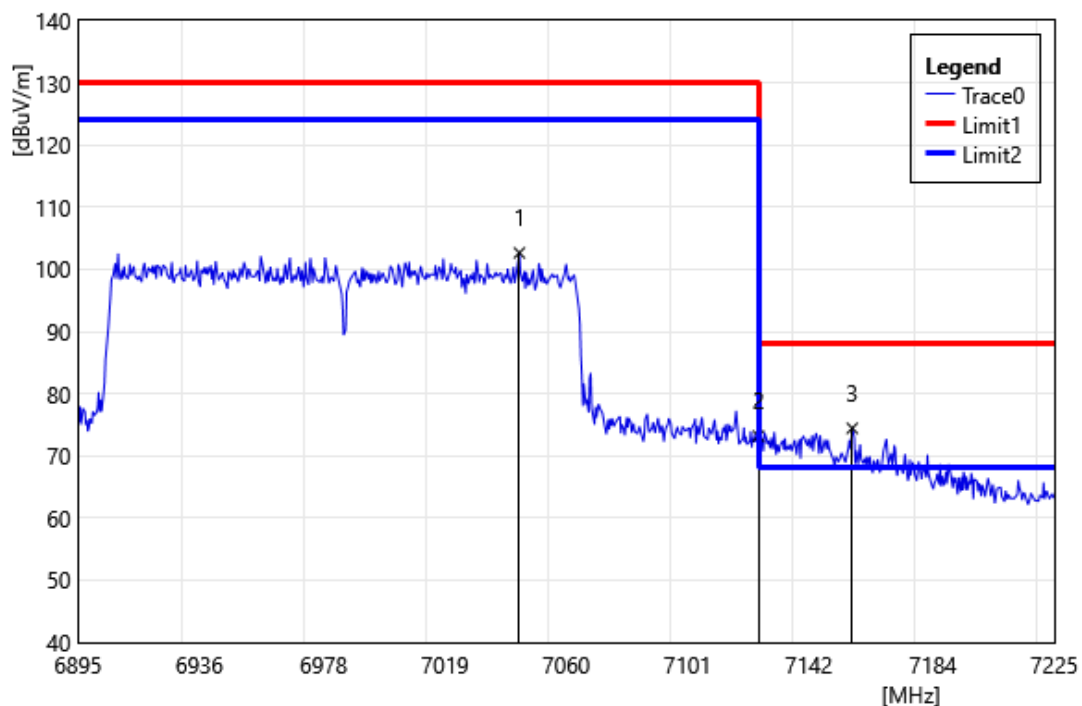


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7044.16	98.21	4.45	102.66	130.00	-27.34	PEAK
2	7125.00	68.22	4.98	73.20	88.20	-15.00	PEAK
3	7156.69	69.36	5.08	74.44	88.20	-13.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

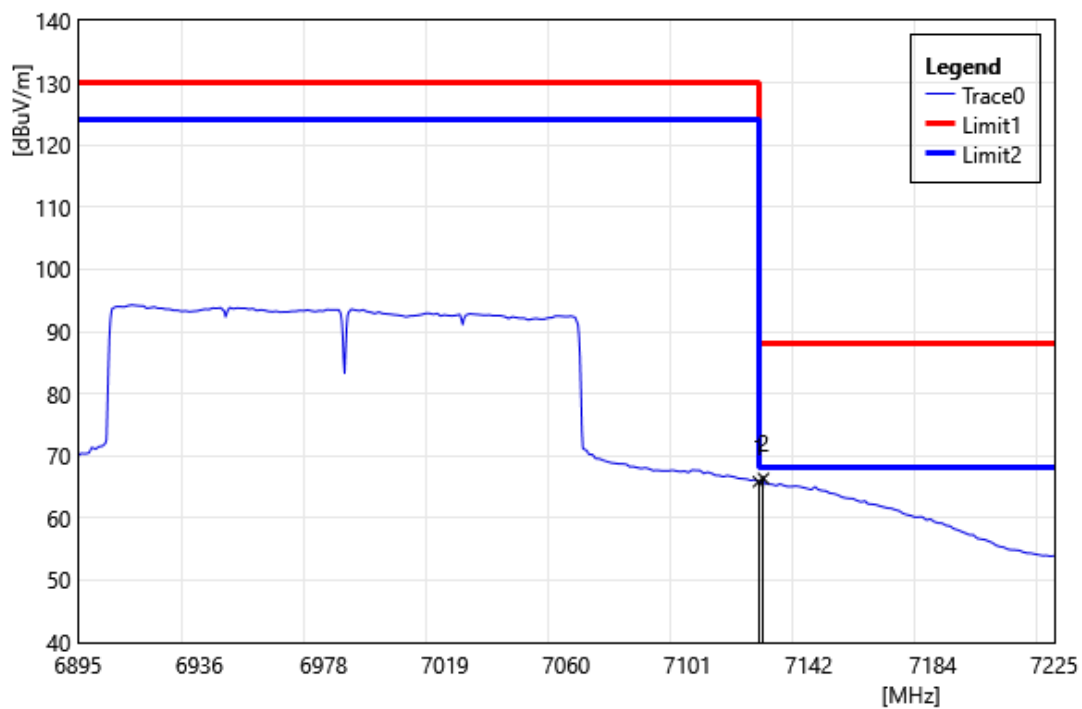


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.86	4.98	65.84	68.20	-2.36	AVG
2	7126.66	61.36	4.99	66.35	68.20	-1.85	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

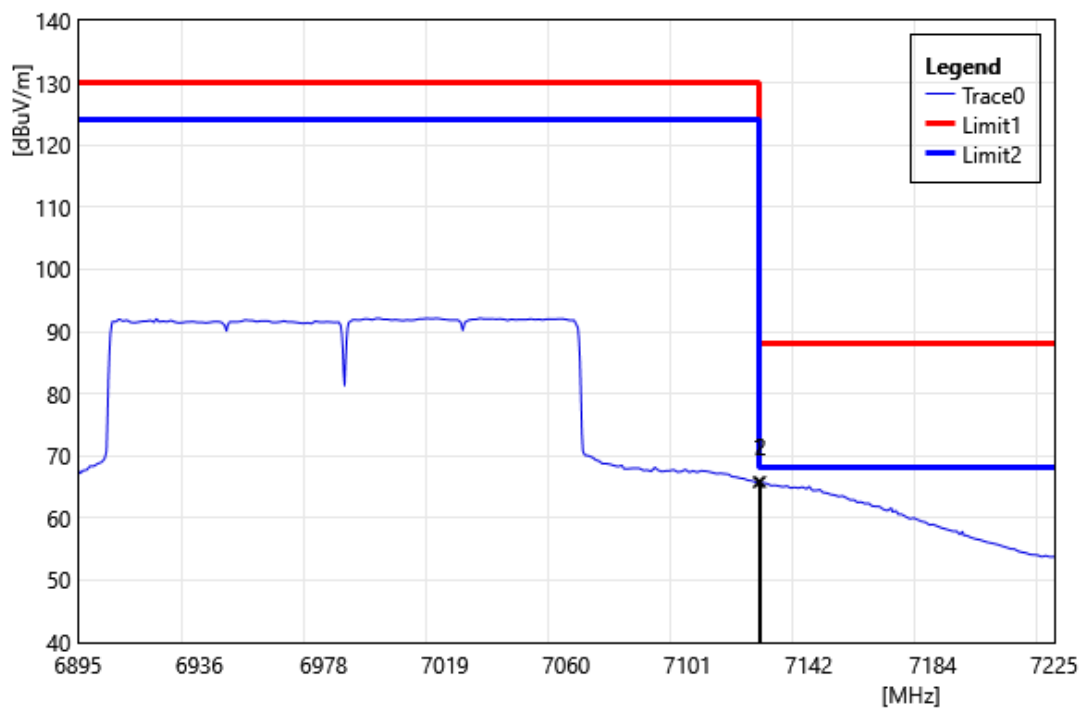


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.80	4.98	65.78	68.20	-2.42	AVG
2	7125.67	60.83	4.98	65.82	68.20	-2.39	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

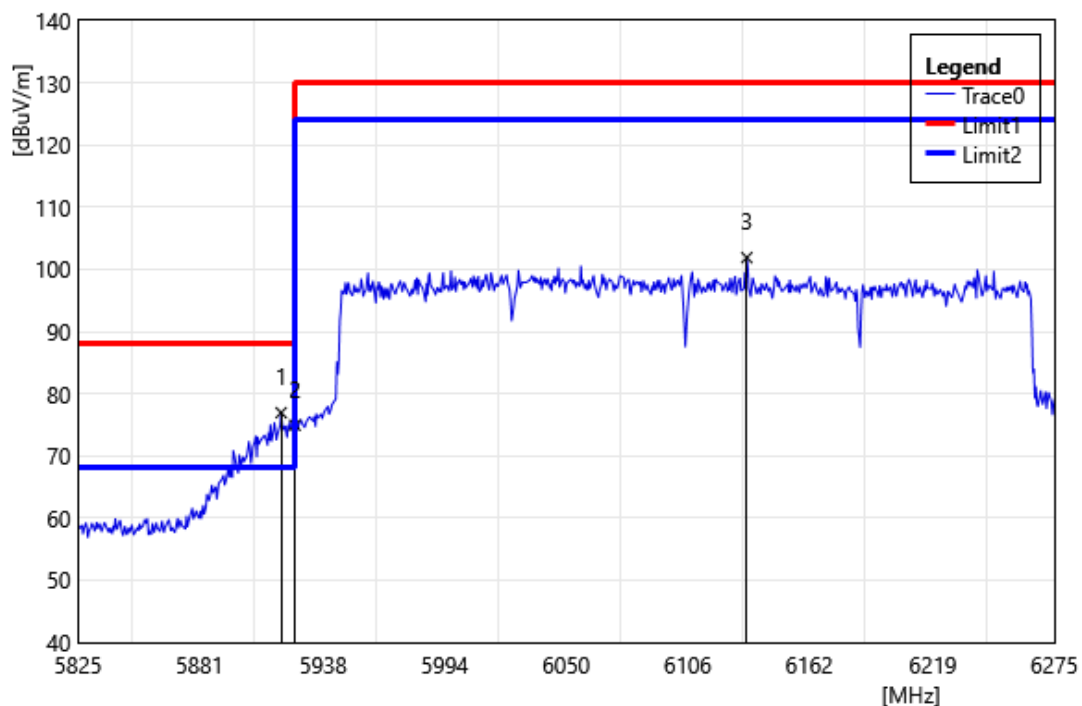


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.60	76.23	0.72	76.95	88.20	-11.25	PEAK
2	5925.00	74.26	0.68	74.94	88.20	-13.26	PEAK
3	6133.25	100.71	1.18	101.89	130.00	-28.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

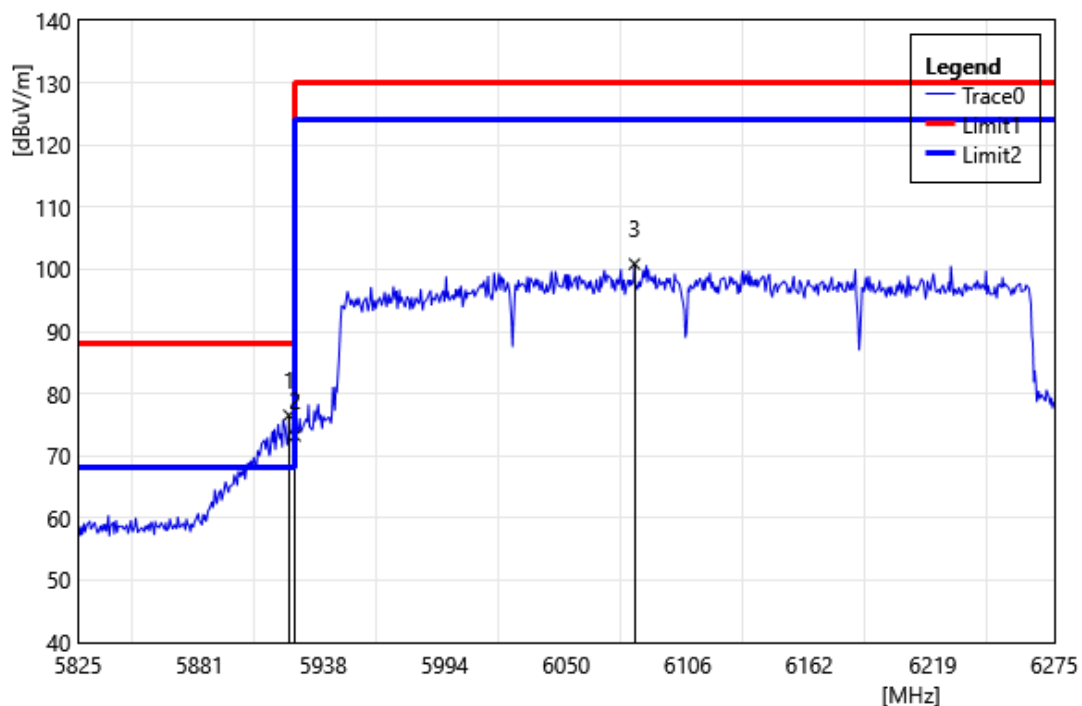


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.20	75.81	0.70	76.51	88.20	-11.69	PEAK
2	5925.00	72.57	0.68	73.25	88.20	-14.95	PEAK
3	6081.50	99.85	1.01	100.86	130.00	-29.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Vertical		
Remark:			

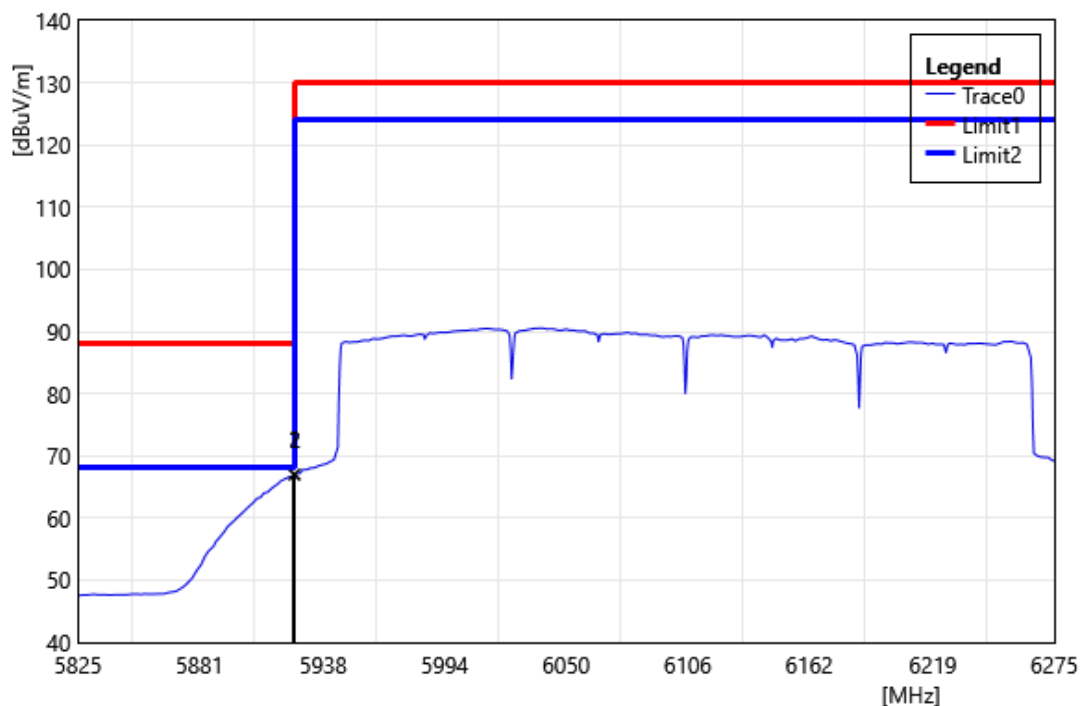


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.45	66.28	0.69	66.97	68.20	-1.23	AVG
2	5925.00	66.34	0.68	67.02	68.20	-1.18	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Horizontal		
Remark:			

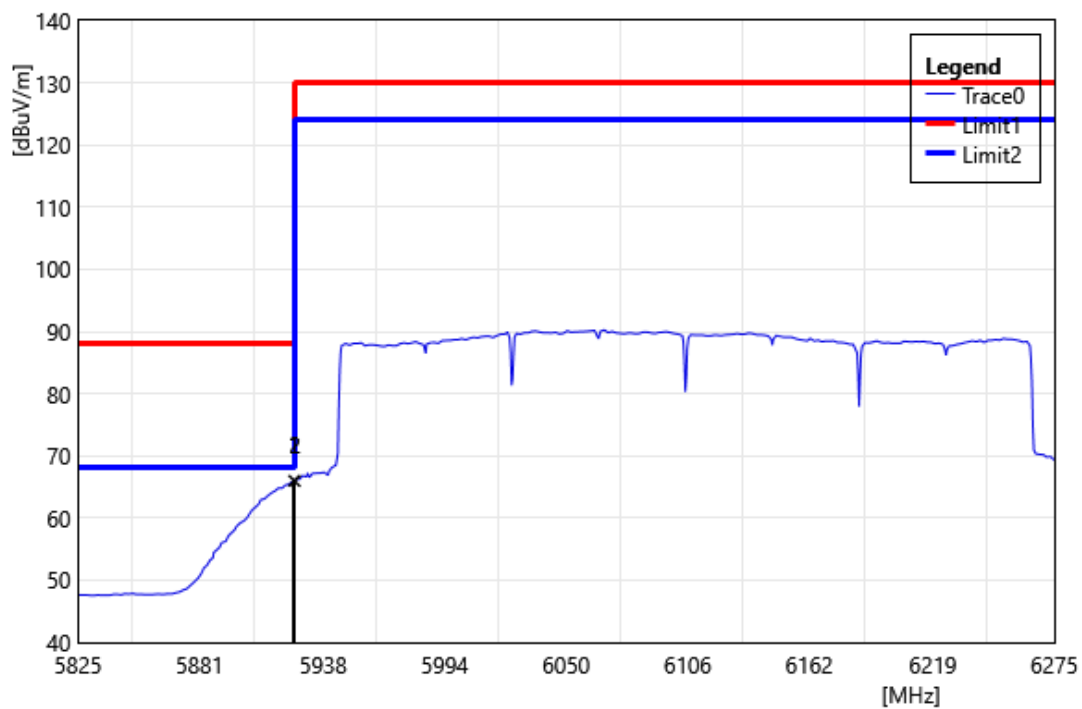


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.45	65.31	0.69	66.00	68.20	-2.20	AVG
2	5925.00	65.27	0.68	65.95	68.20	-2.25	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

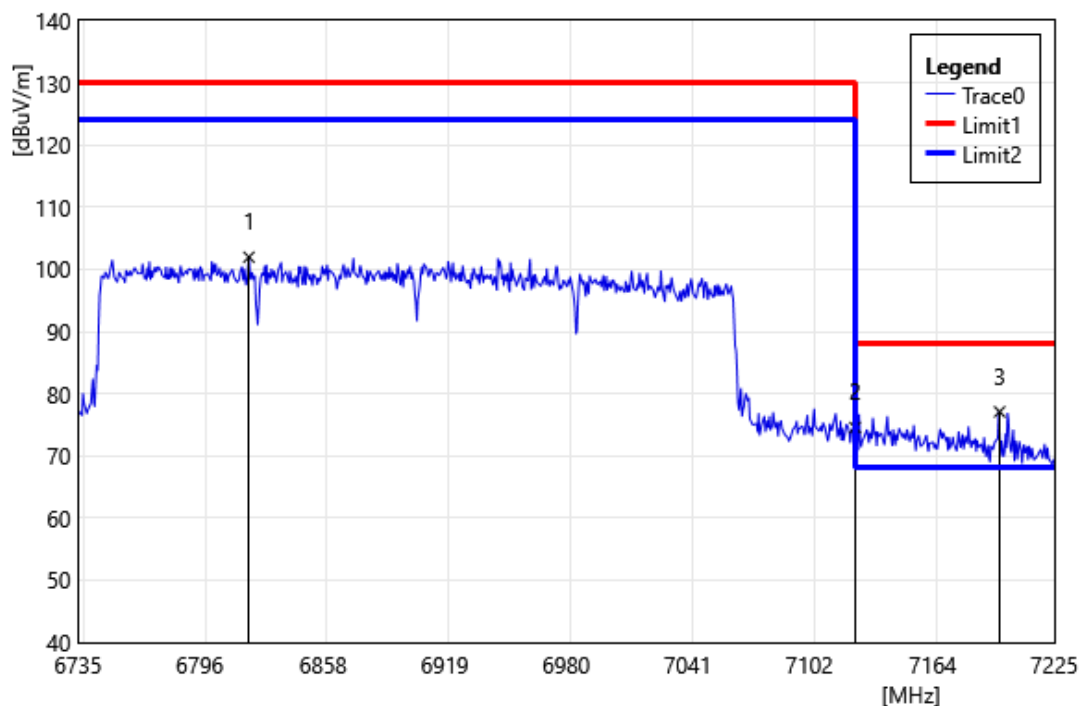


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6820.75	98.40	3.56	101.96	130.00	-28.04	PEAK
2	7125.00	69.58	4.98	74.56	88.20	-13.64	PEAK
3	7197.56	71.82	5.27	77.10	88.20	-11.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Horizontal		
Remark:			

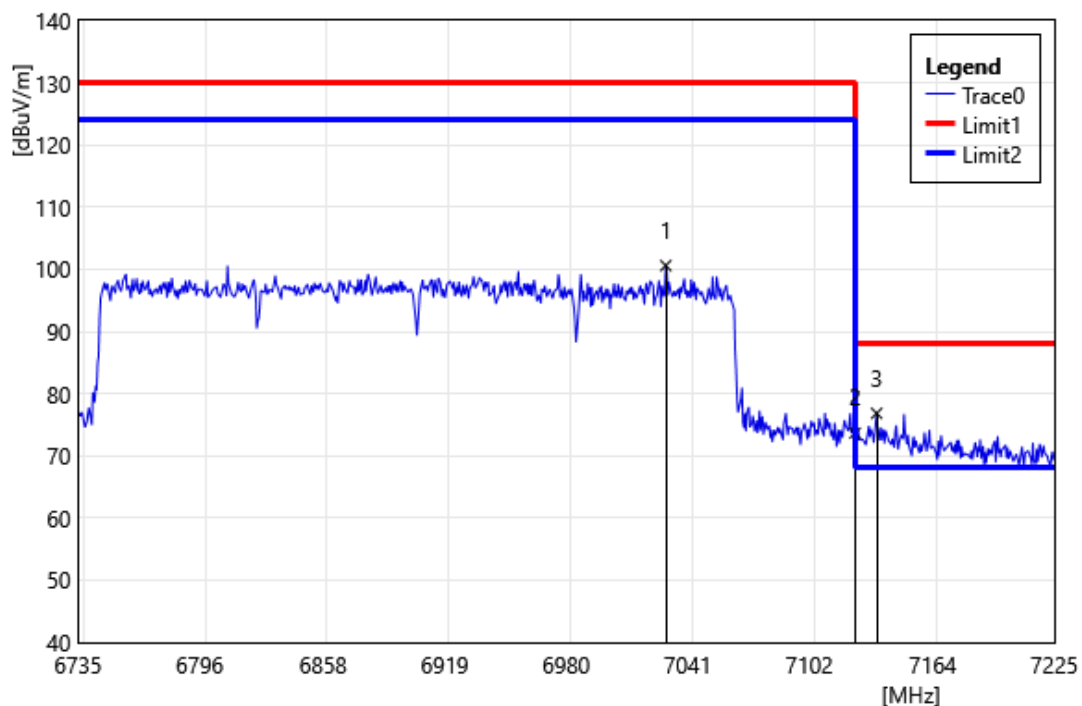


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7029.98	96.26	4.35	100.61	130.00	-29.39	PEAK
2	7125.00	68.69	4.98	73.67	88.20	-14.53	PEAK
3	7135.82	71.85	5.01	76.86	88.20	-11.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

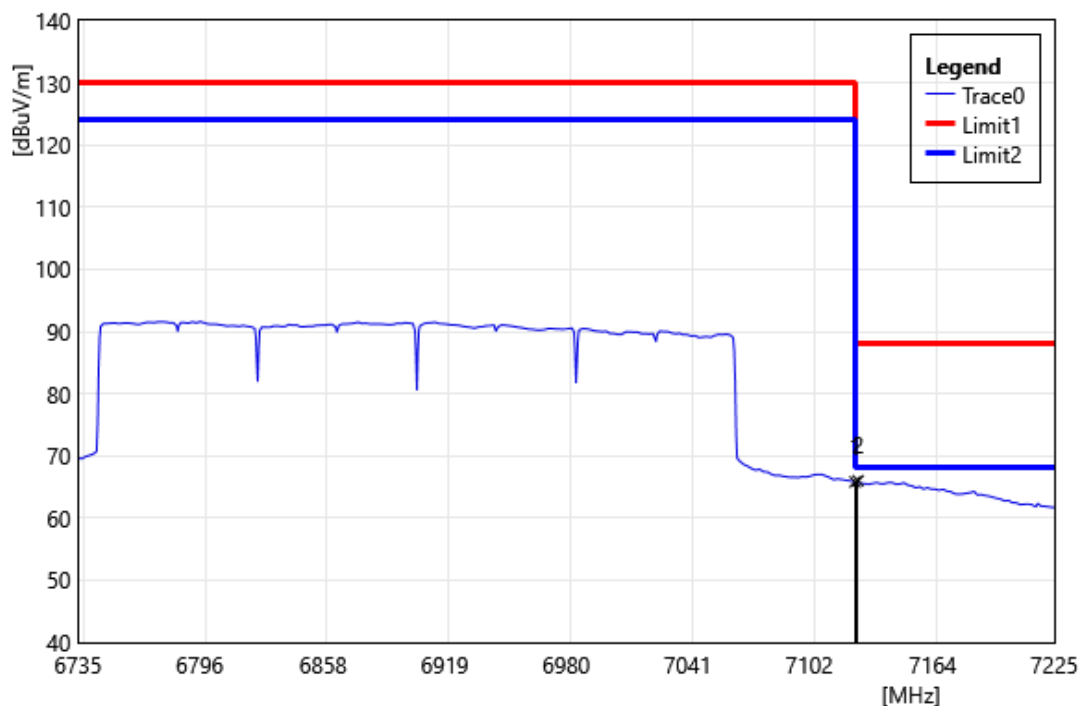

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.82	4.98	65.80	68.20	-2.40	AVG
2	7126.51	61.01	4.99	66.00	68.20	-2.20	AVG


Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Horizontal		
Remark:			

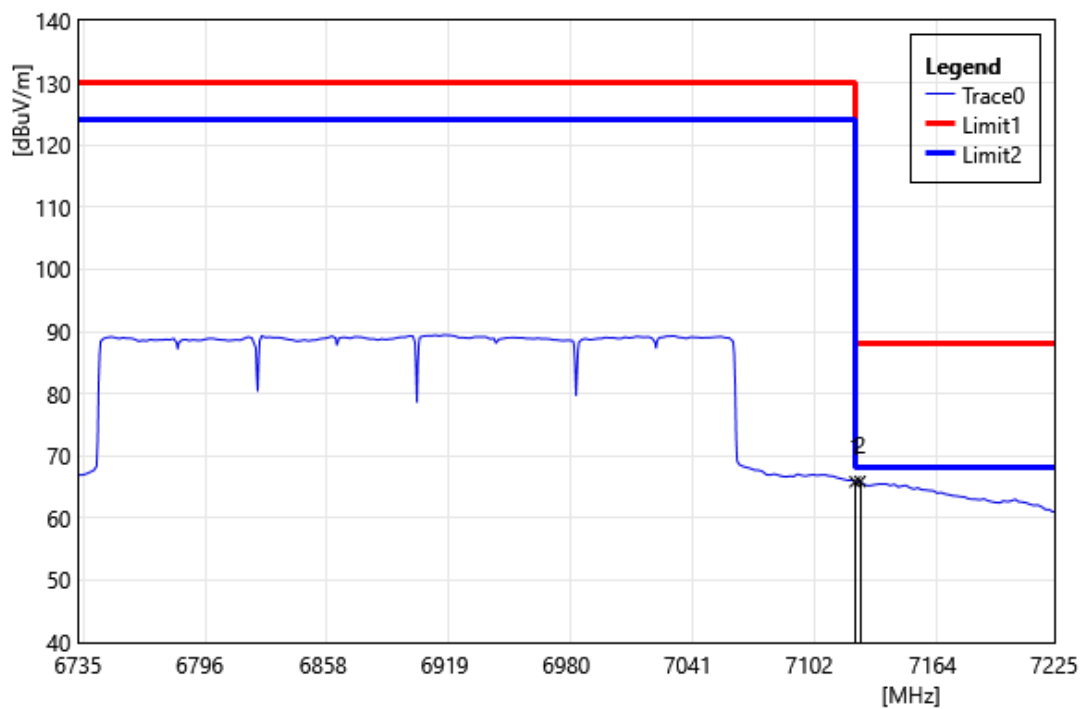

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.84	4.98	65.82	68.20	-2.38	AVG
2	7127.49	60.90	4.99	65.89	68.20	-2.31	AVG


2X2- Band Edge

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

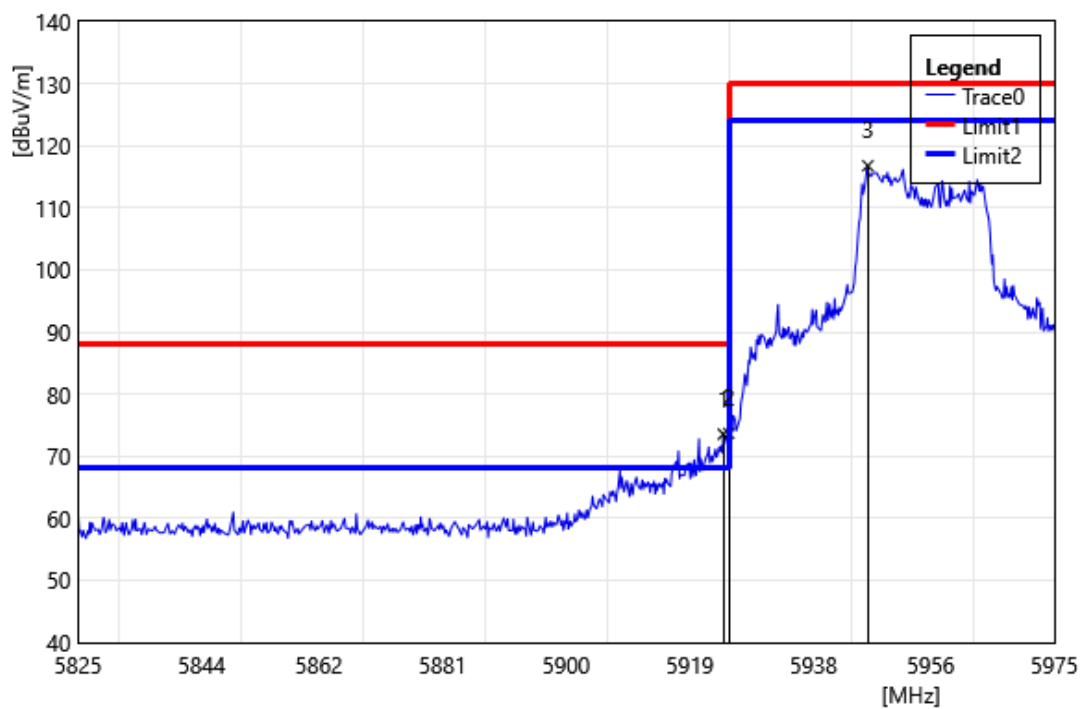


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.15	72.86	0.69	73.55	88.20	-14.65	PEAK
2	5925.00	73.01	0.68	73.69	88.20	-14.51	PEAK
3	5946.35	116.20	0.58	116.79	130.00	-13.22	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

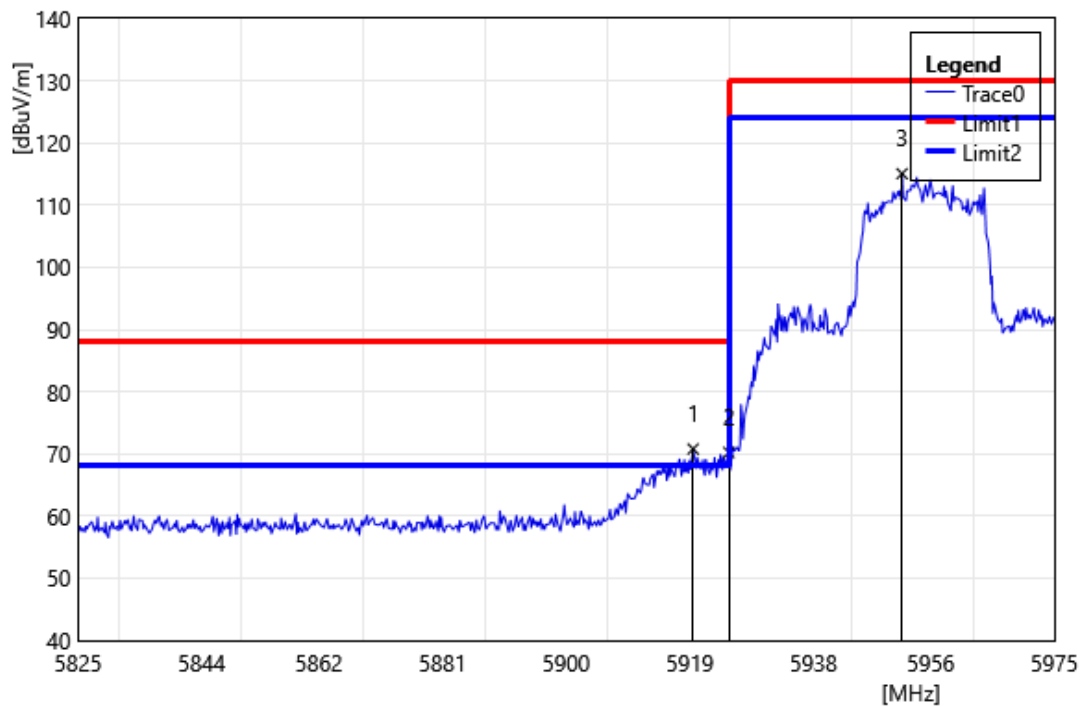


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5919.50	70.08	0.71	70.79	88.20	-17.41	PEAK
2	5925.00	69.55	0.68	70.23	88.20	-17.97	PEAK
3	5951.60	114.50	0.57	115.07	130.00	-14.93	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

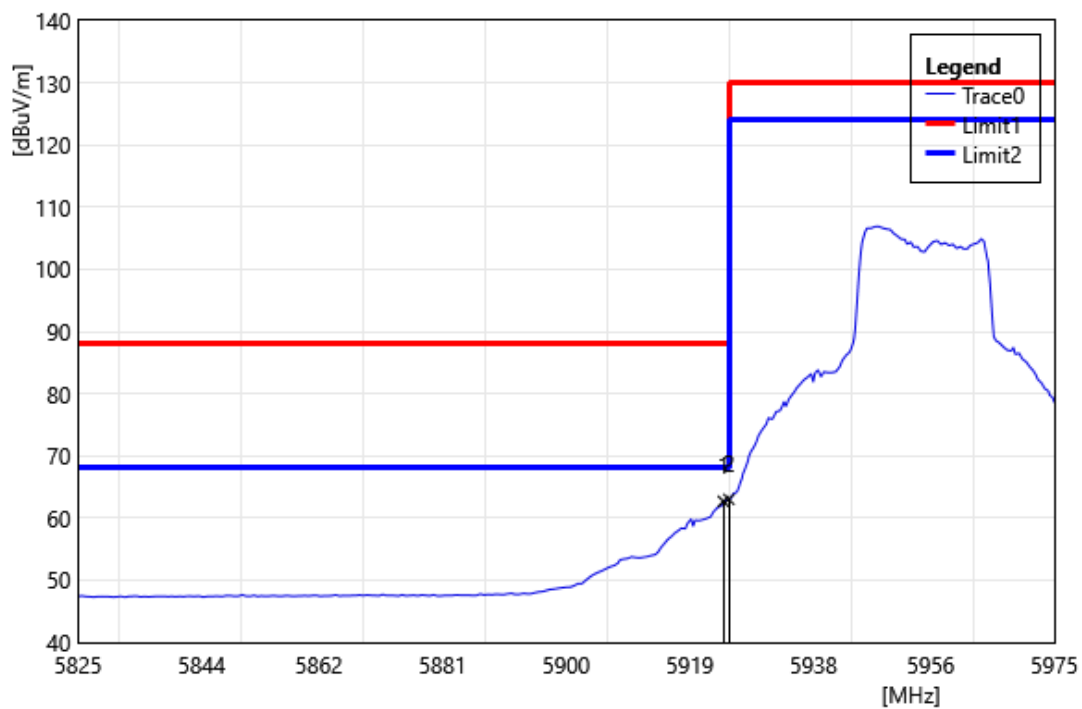


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.15	62.00	0.69	62.69	68.20	-5.51	AVG
2	5925.00	62.34	0.68	63.02	68.20	-5.18	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

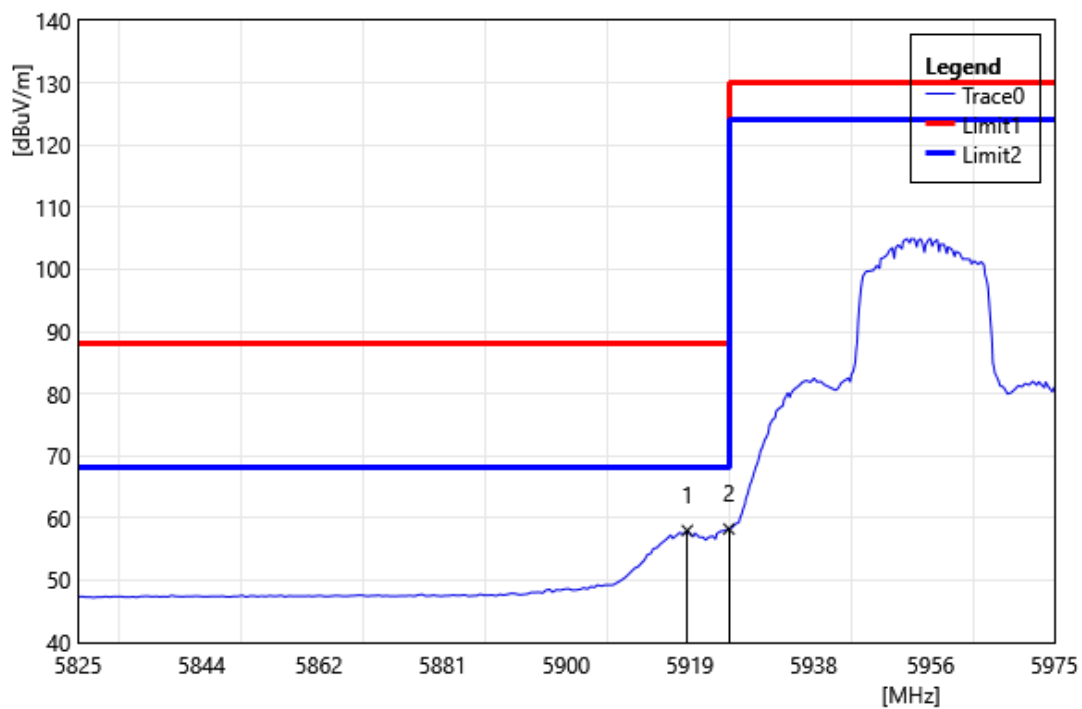


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.60	57.27	0.72	57.99	68.20	-10.21	AVG
2	5925.00	57.55	0.68	58.23	68.20	-9.97	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

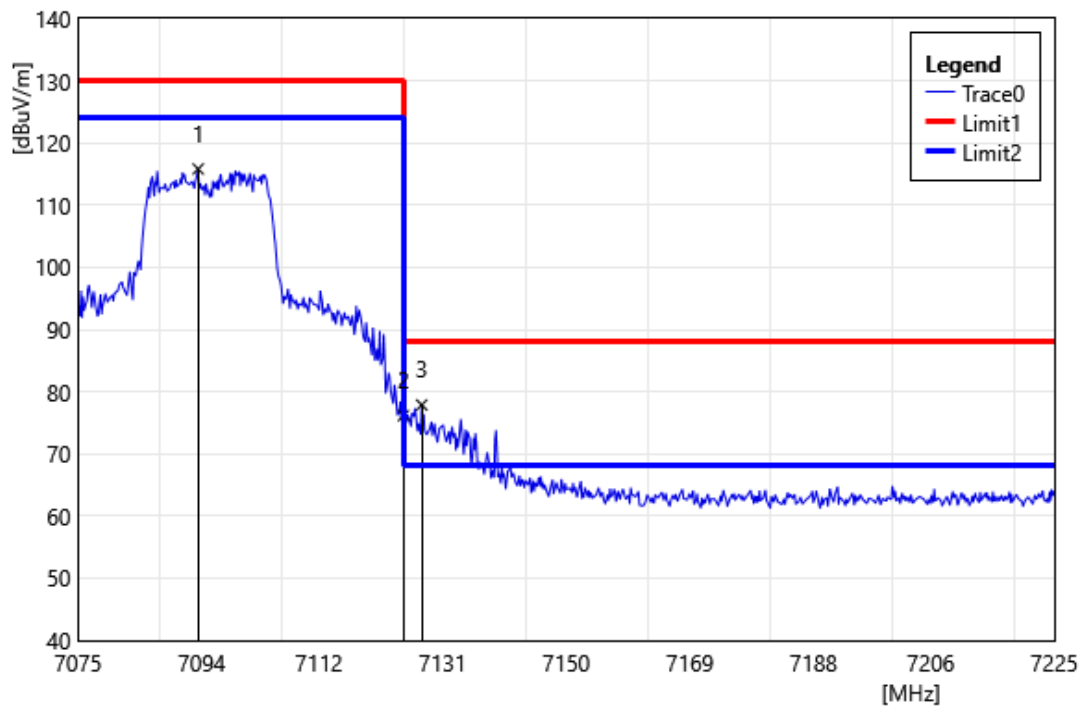


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7093.45	110.96	4.86	115.82	130.00	-14.18	PEAK
2	7125.00	71.18	4.98	76.16	88.20	-12.04	PEAK
3	7127.80	72.89	4.99	77.88	88.20	-10.32	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

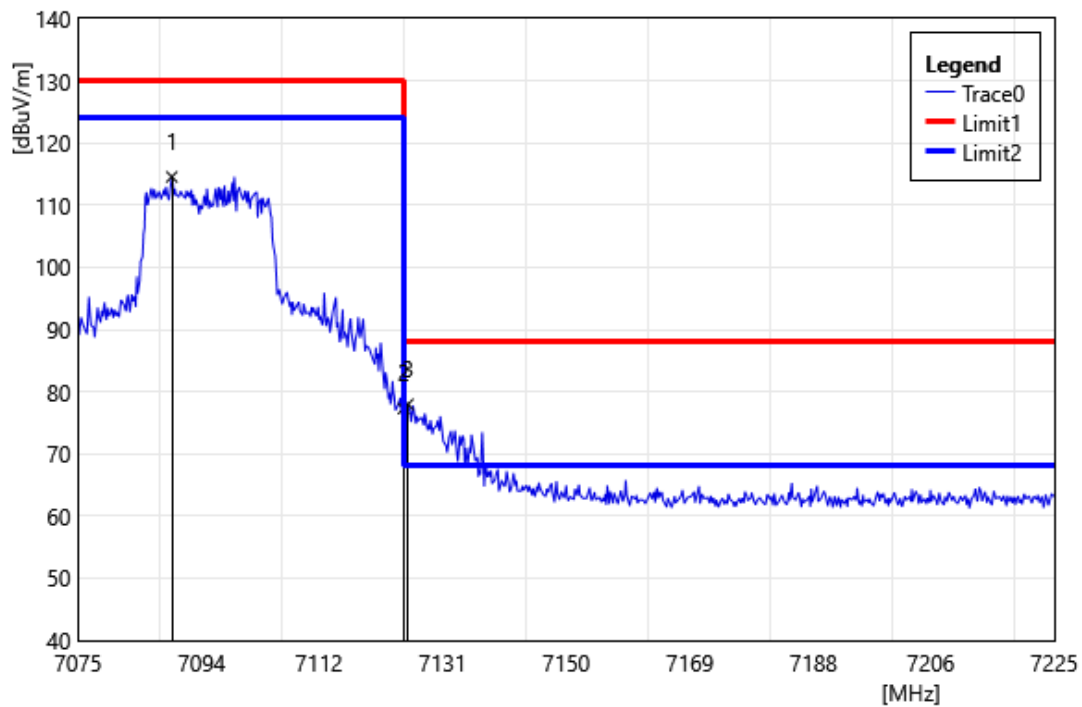


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7089.40	109.73	4.82	114.55	130.00	-15.45	PEAK
2	7125.00	72.30	4.98	77.28	88.20	-10.92	PEAK
3	7125.70	72.99	4.98	77.97	88.20	-10.23	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

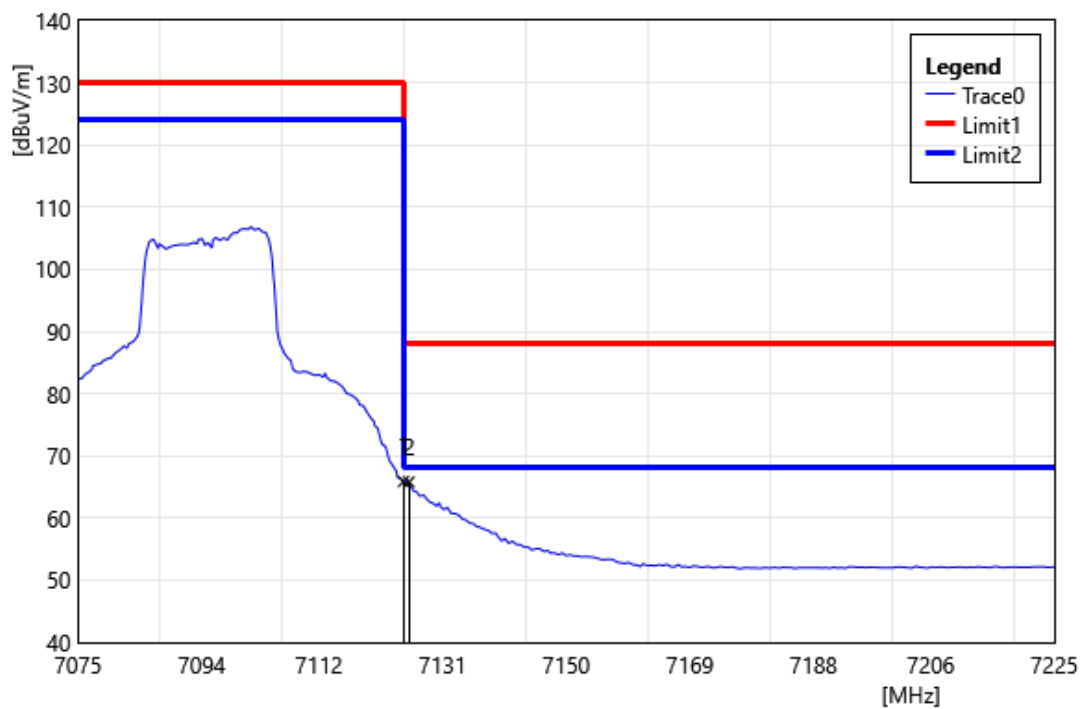


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.90	4.98	65.88	68.20	-2.32	AVG
2	7125.85	60.82	4.98	65.80	68.20	-2.40	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

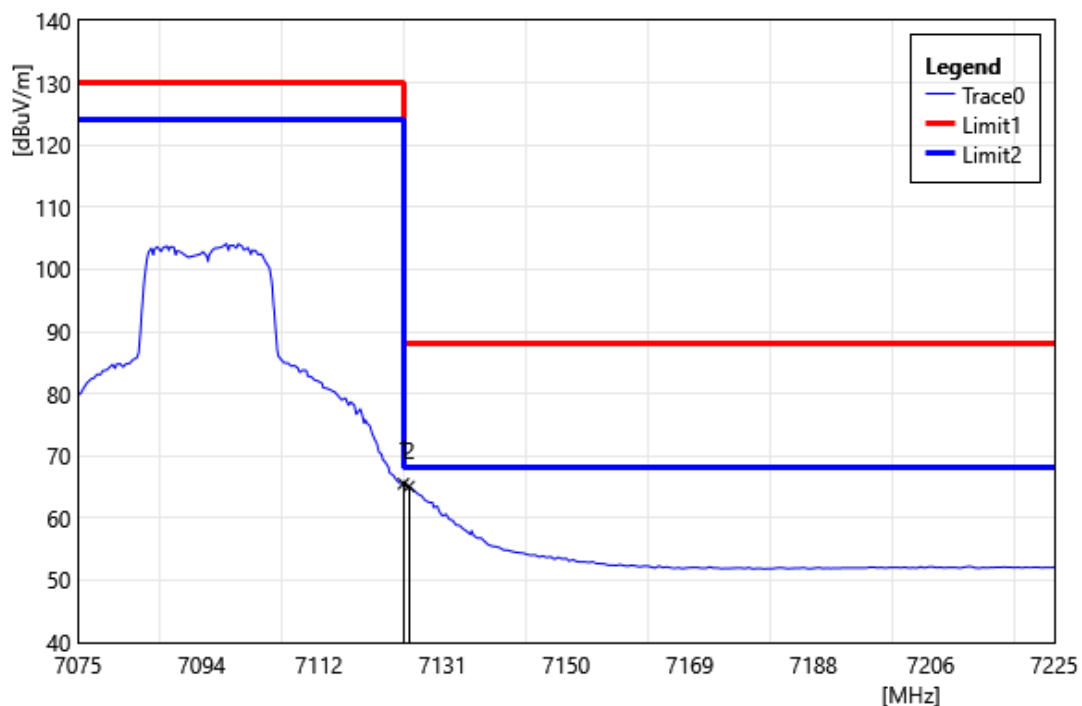


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.54	4.98	65.52	68.20	-2.68	AVG
2	7125.85	60.10	4.98	65.08	68.20	-3.12	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

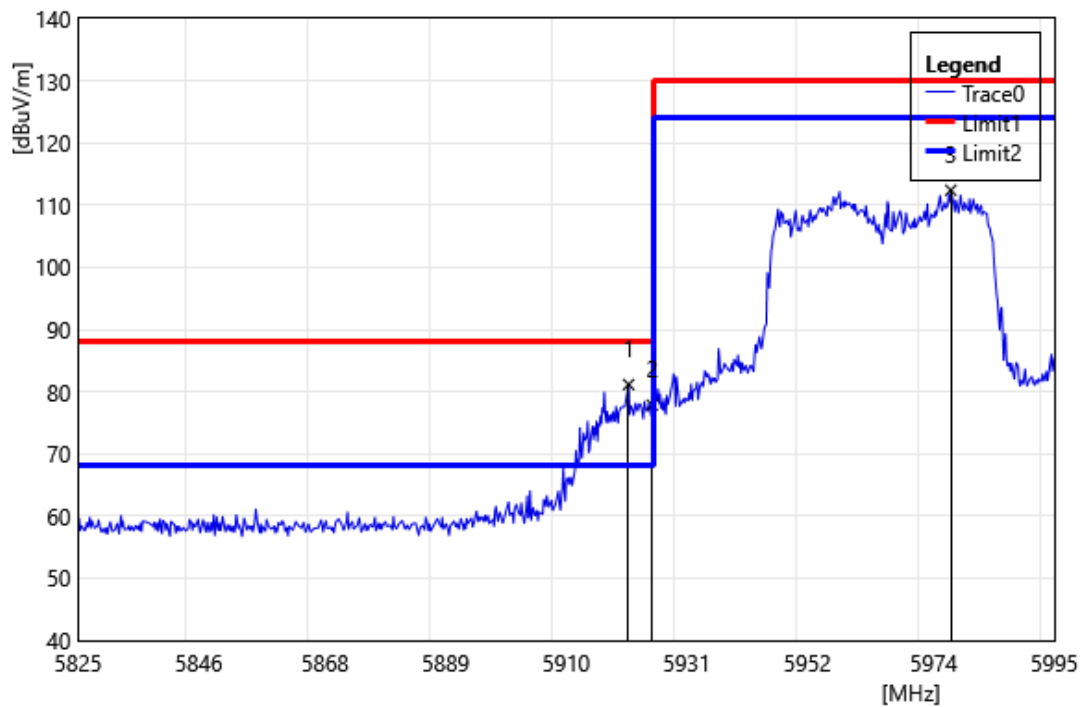


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.88	80.46	0.70	81.16	88.20	-7.04	PEAK
2	5925.00	77.18	0.68	77.86	88.20	-10.34	PEAK
3	5976.98	111.76	0.65	112.41	130.00	-17.59	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

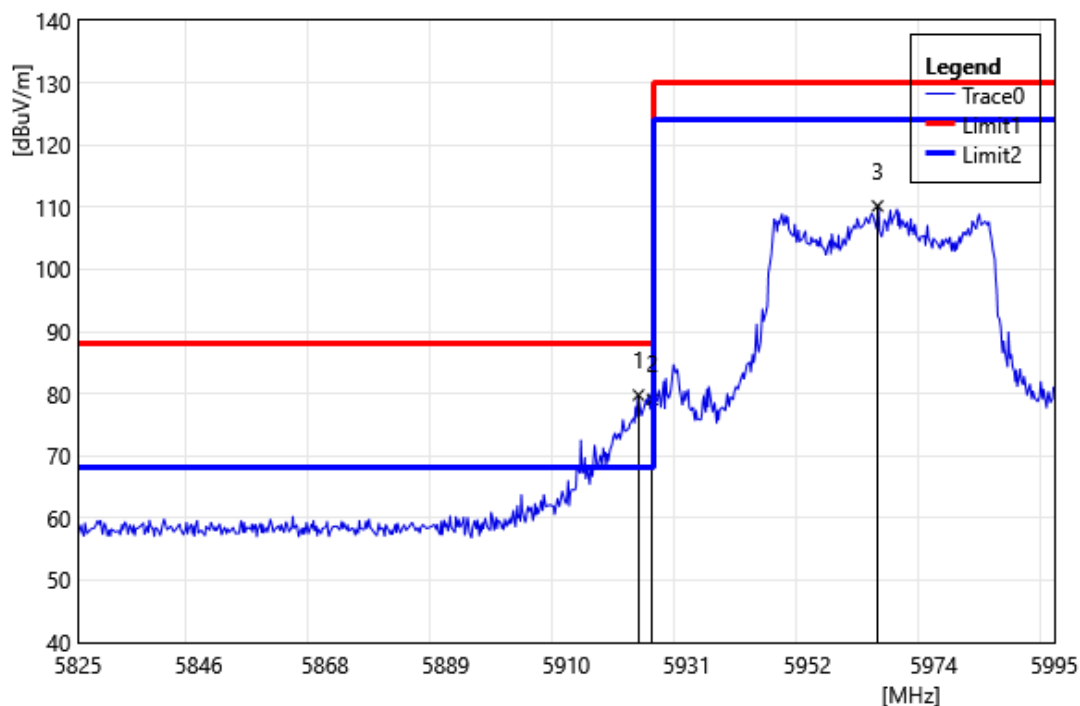


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.58	79.08	0.70	79.78	88.20	-8.42	PEAK
2	5925.00	78.39	0.68	79.07	88.20	-9.13	PEAK
3	5964.23	109.58	0.61	110.19	130.00	-19.82	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

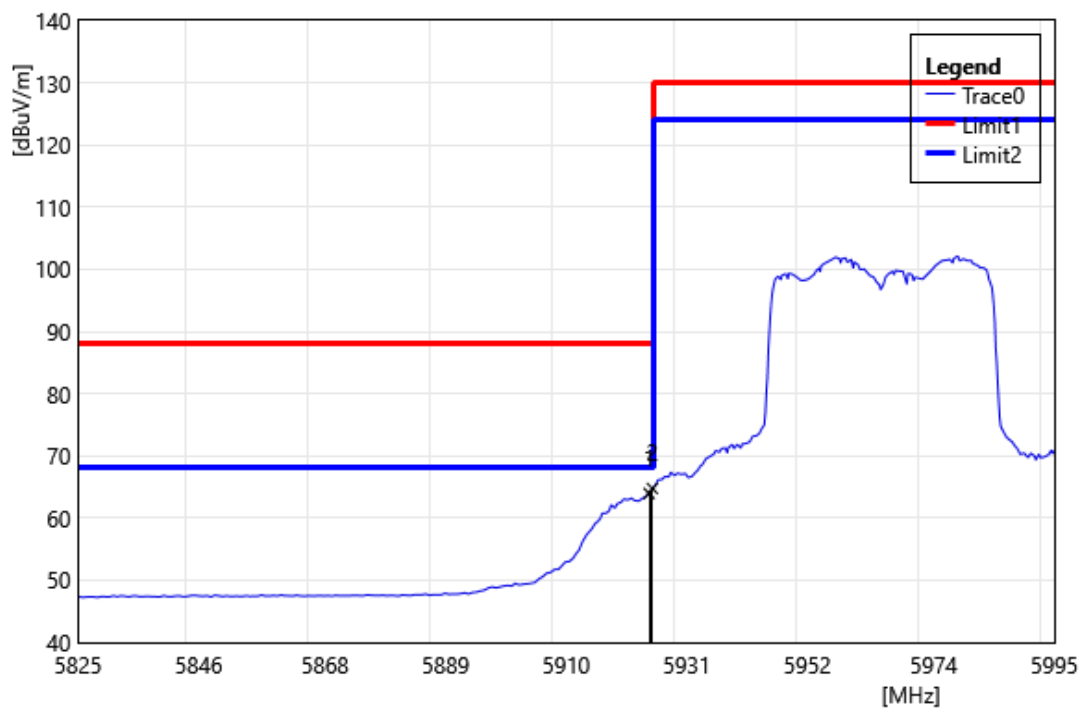


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.45	63.27	0.69	63.96	68.20	-4.24	AVG
2	5925.00	64.09	0.68	64.77	68.20	-3.43	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

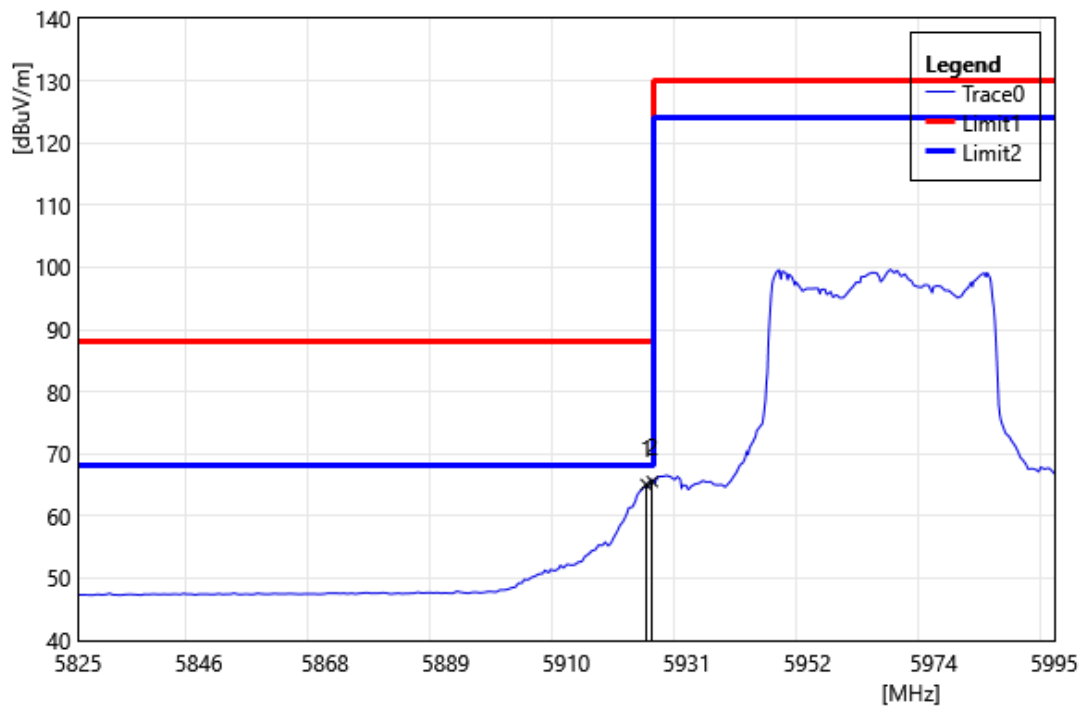


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.94	64.39	0.69	65.08	68.20	-3.12	AVG
2	5925.00	64.86	0.68	65.54	68.20	-2.66	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

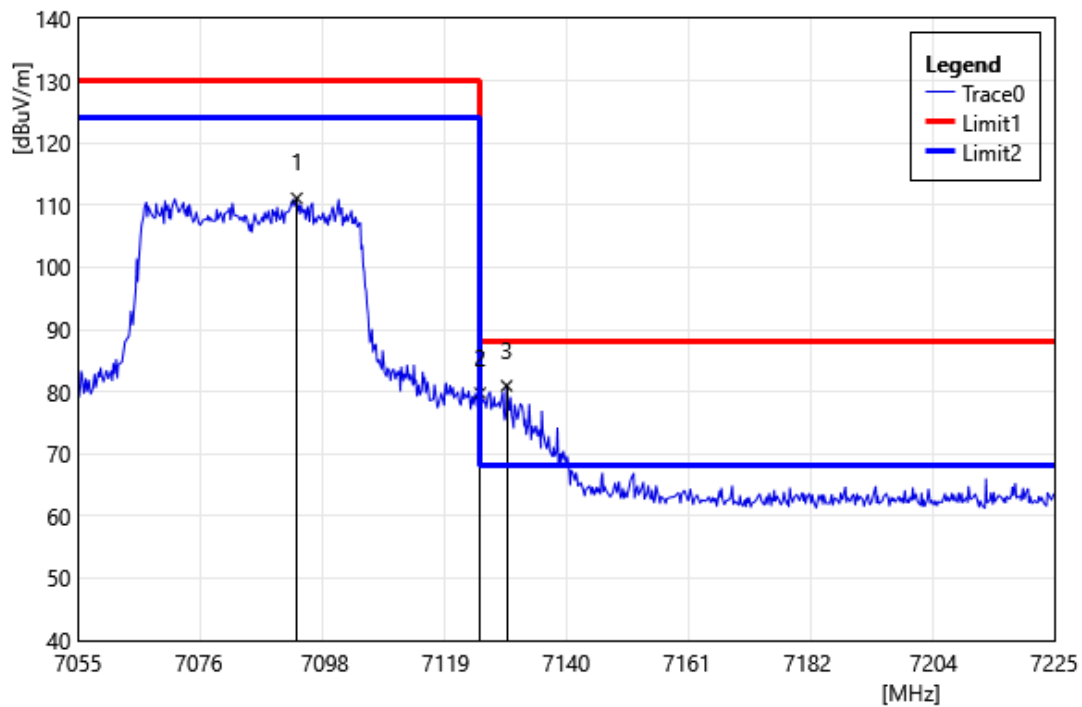


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7093.08	106.26	4.86	111.12	130.00	-18.88	PEAK
2	7125.00	74.81	4.98	79.79	88.20	-8.41	PEAK
3	7129.63	75.96	4.99	80.96	88.20	-7.25	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

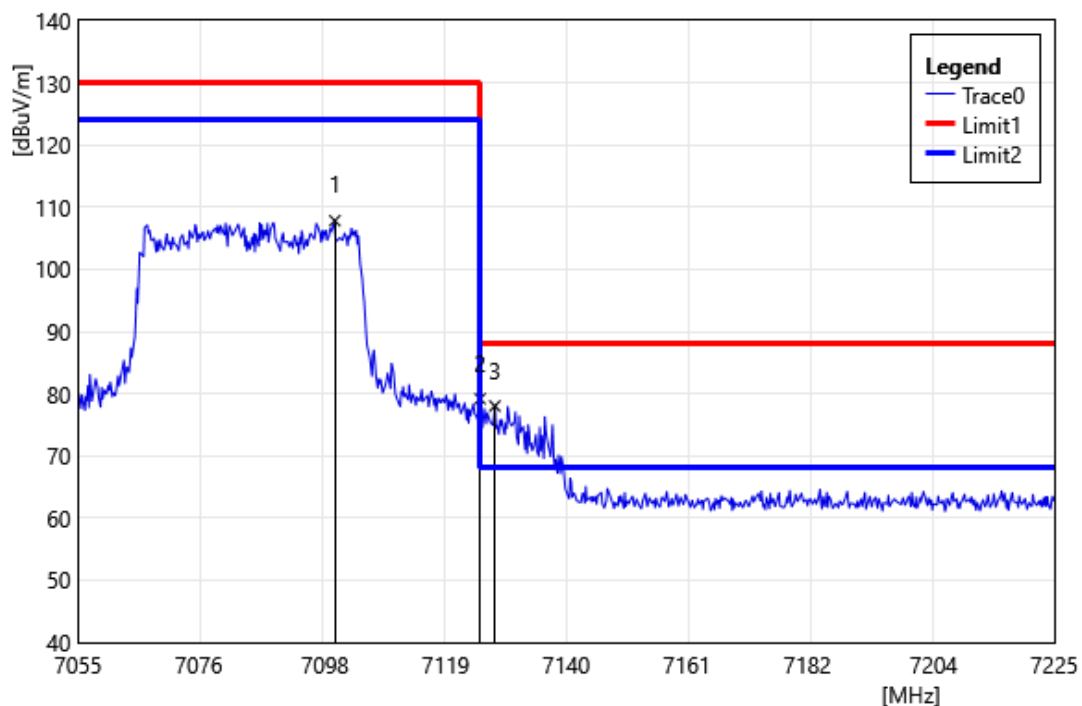


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7099.71	102.91	4.91	107.82	130.00	-22.18	PEAK
2	7125.00	74.22	4.98	79.20	88.20	-9.00	PEAK
3	7127.59	73.02	4.99	78.01	88.20	-10.19	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Vertical		
Remark:			

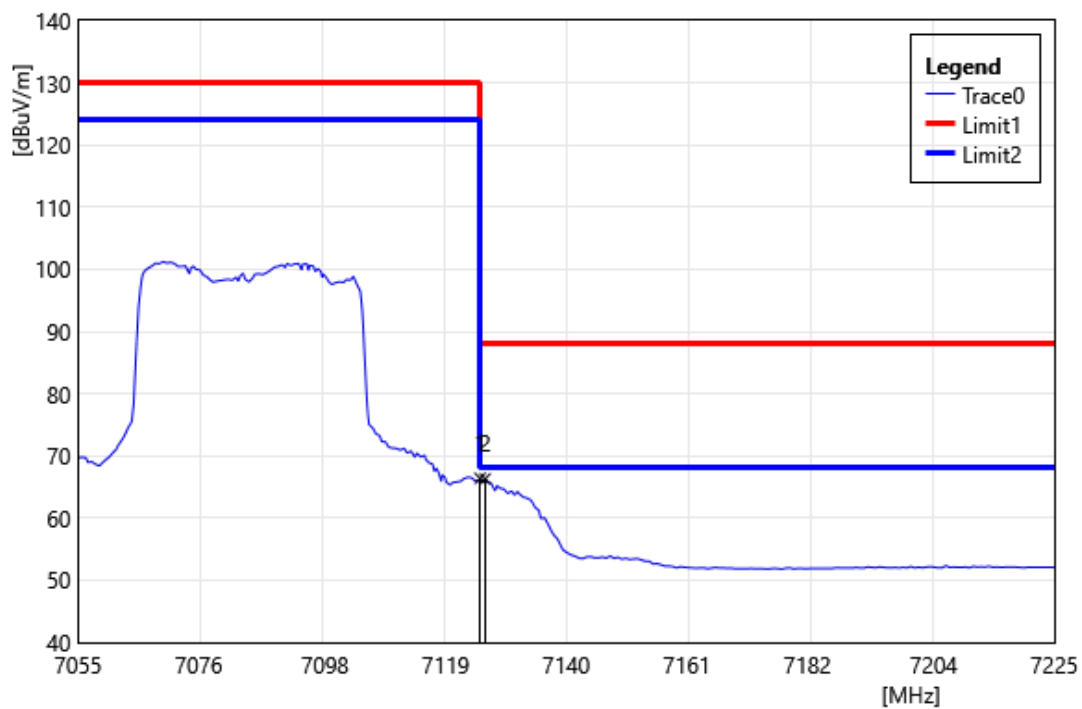


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.42	4.98	66.40	68.20	-1.80	AVG
2	7125.89	61.33	4.98	66.31	68.20	-1.89	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Horizontal		
Remark:			

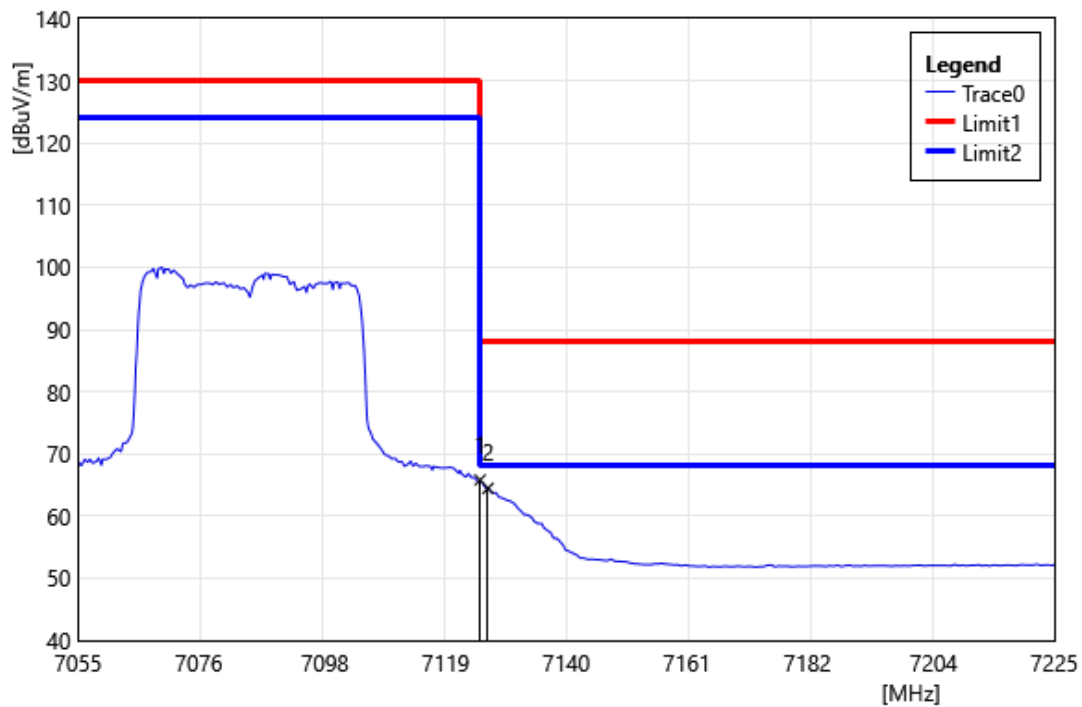


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.83	4.98	65.81	68.20	-2.39	AVG
2	7126.40	59.47	4.99	64.46	68.20	-3.74	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

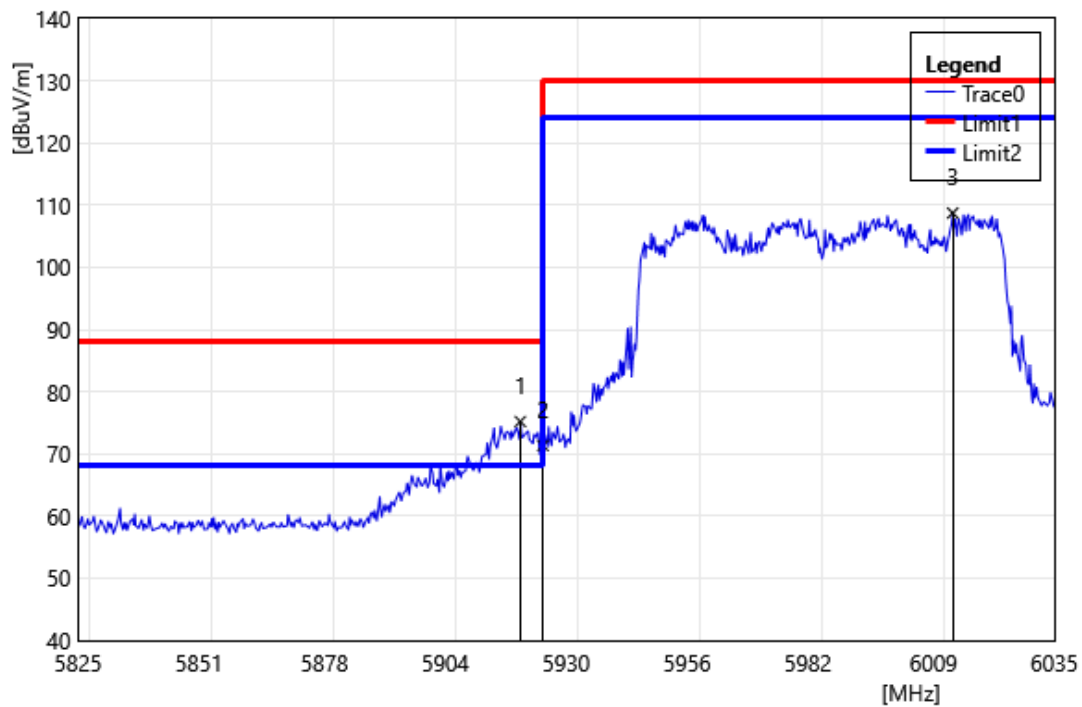


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.13	74.49	0.71	75.20	88.20	-13.00	PEAK
2	5925.00	70.67	0.68	71.35	88.20	-16.85	PEAK
3	6013.16	107.98	0.76	108.74	130.00	-21.27	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

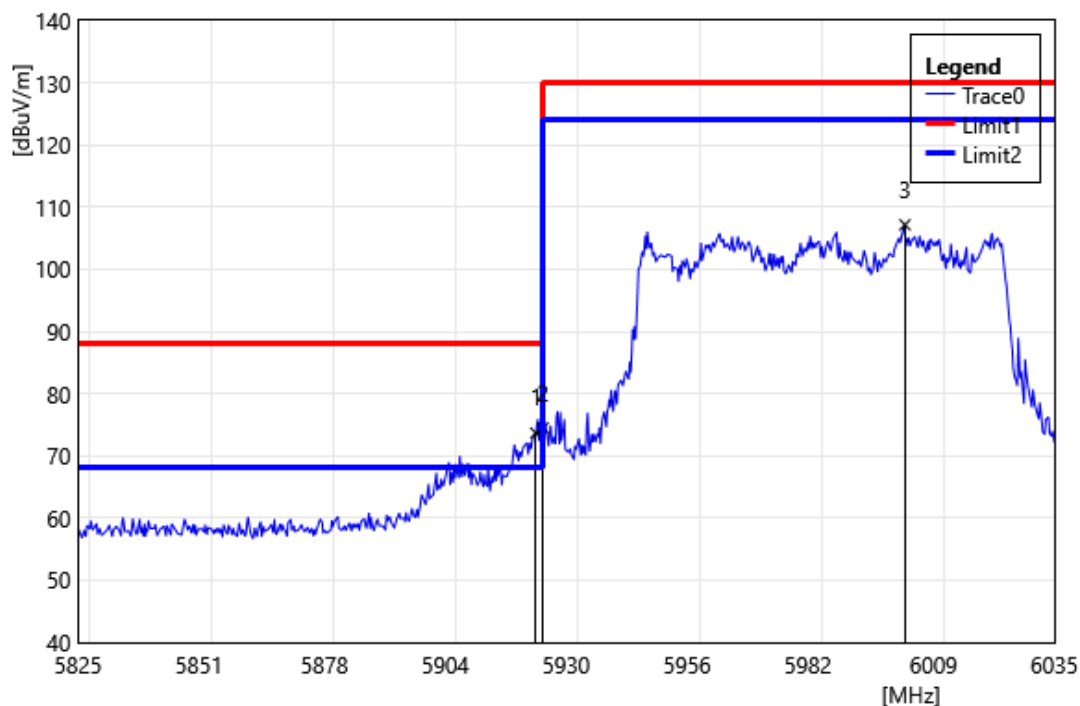


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.49	72.98	0.69	73.68	88.20	-14.53	PEAK
2	5925.00	73.78	0.68	74.46	88.20	-13.74	PEAK
3	6002.87	106.44	0.73	107.17	130.00	-22.83	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

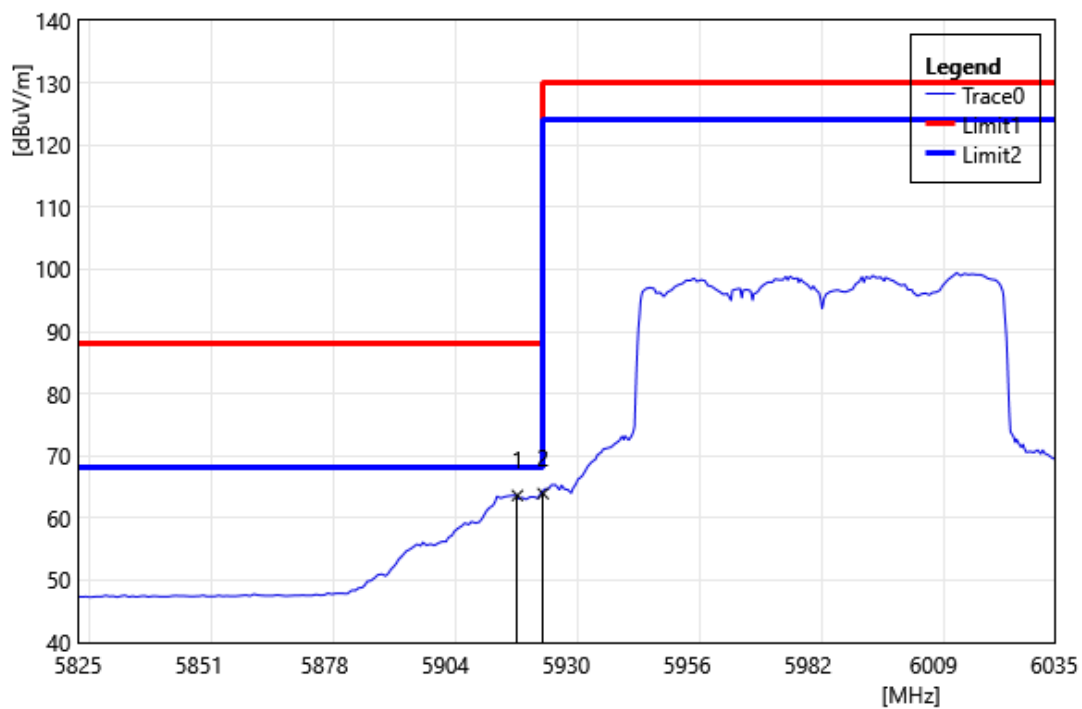


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5919.50	62.92	0.71	63.63	68.20	-4.57	AVG
2	5925.00	63.24	0.68	63.92	68.20	-4.28	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

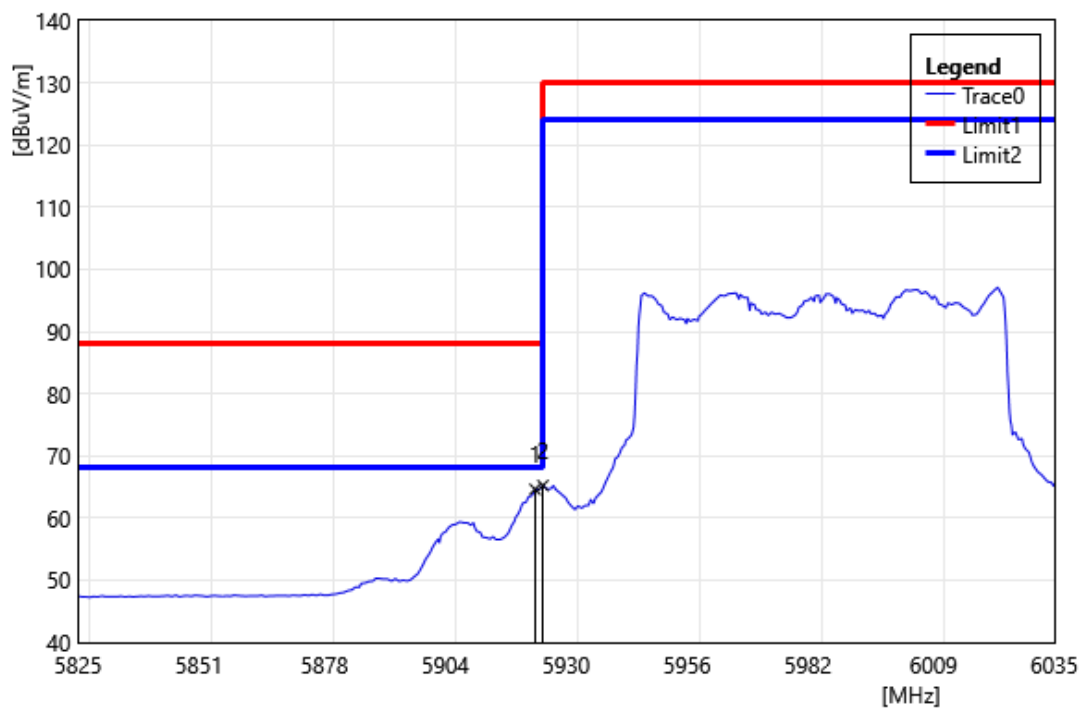


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.28	63.94	0.69	64.63	68.20	-3.58	AVG
2	5925.00	64.54	0.68	65.22	68.20	-2.98	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

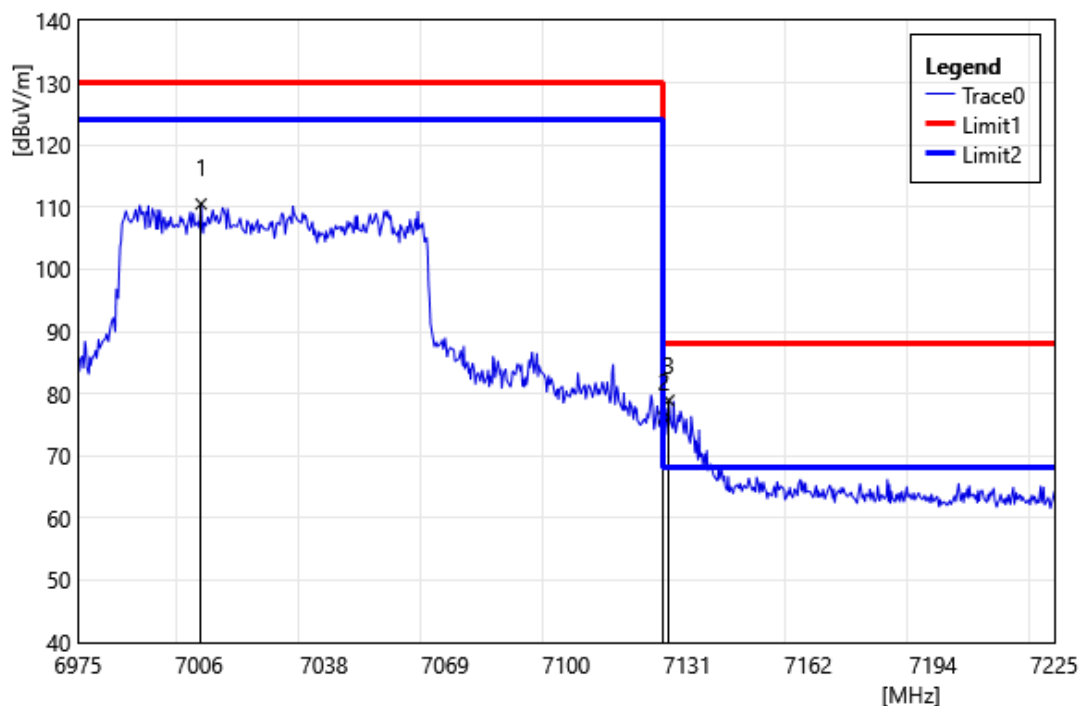


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7006.50	106.32	4.20	110.52	130.00	-19.48	PEAK
2	7125.00	71.22	4.98	76.20	88.20	-12.00	PEAK
3	7126.25	73.93	4.98	78.91	88.20	-9.29	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

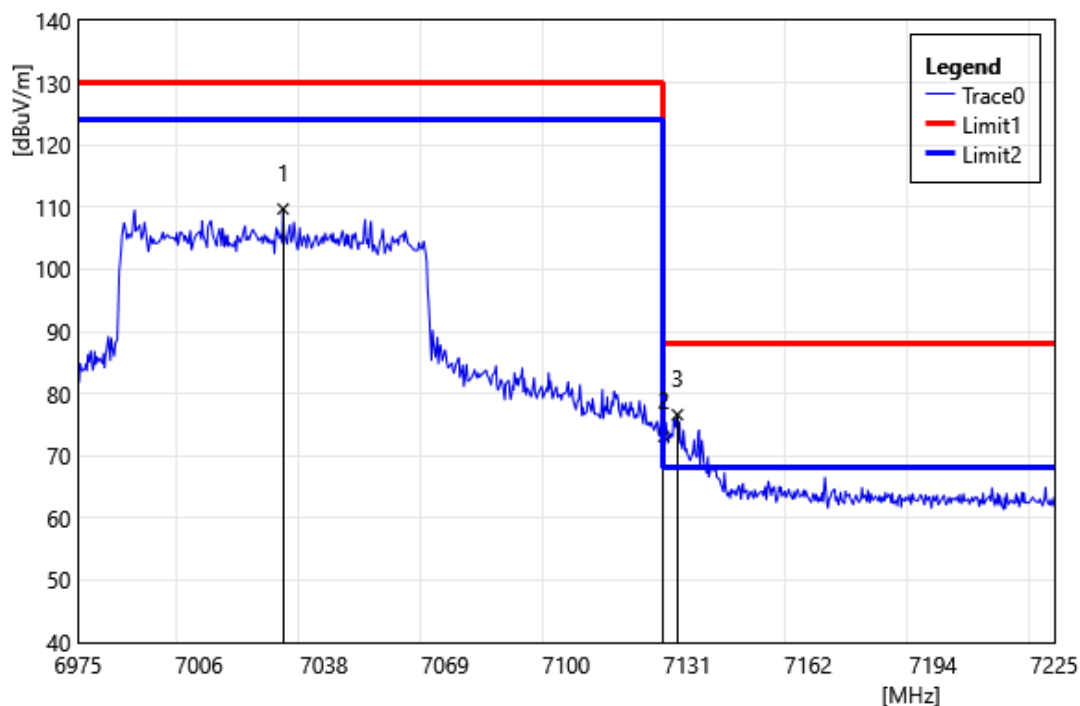


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7027.50	105.37	4.34	109.71	130.00	-20.29	PEAK
2	7125.00	68.15	4.98	73.13	88.20	-15.07	PEAK
3	7128.50	71.63	4.99	76.62	88.20	-11.58	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

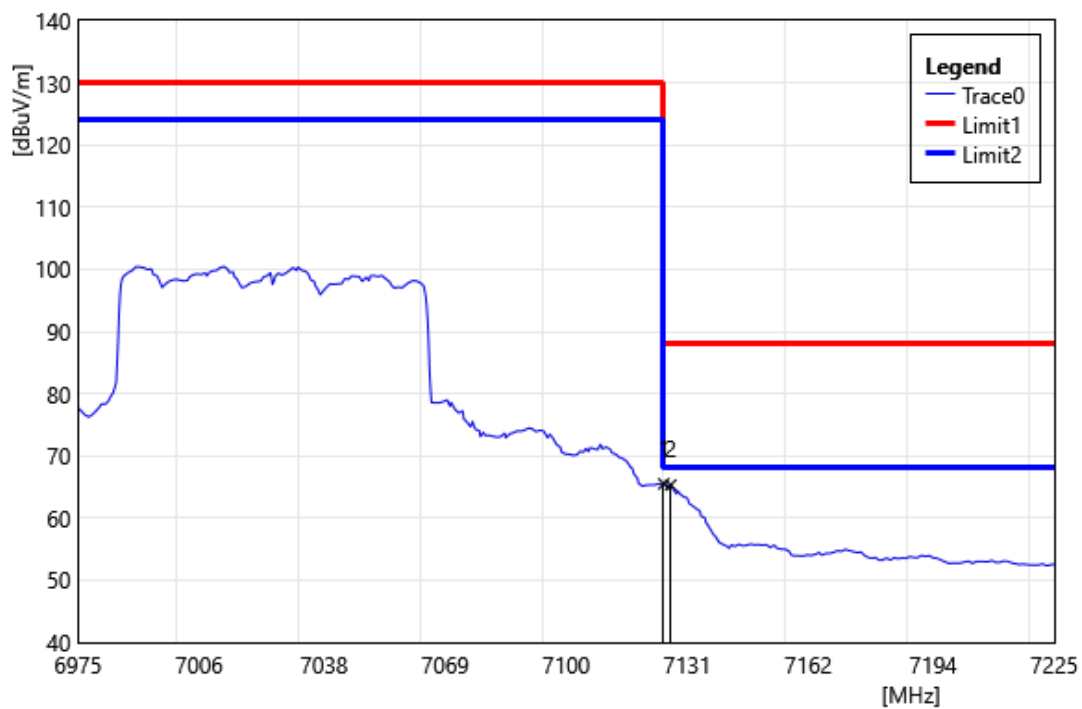


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.52	4.98	65.50	68.20	-2.70	AVG
2	7126.75	60.32	4.99	65.31	68.20	-2.89	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

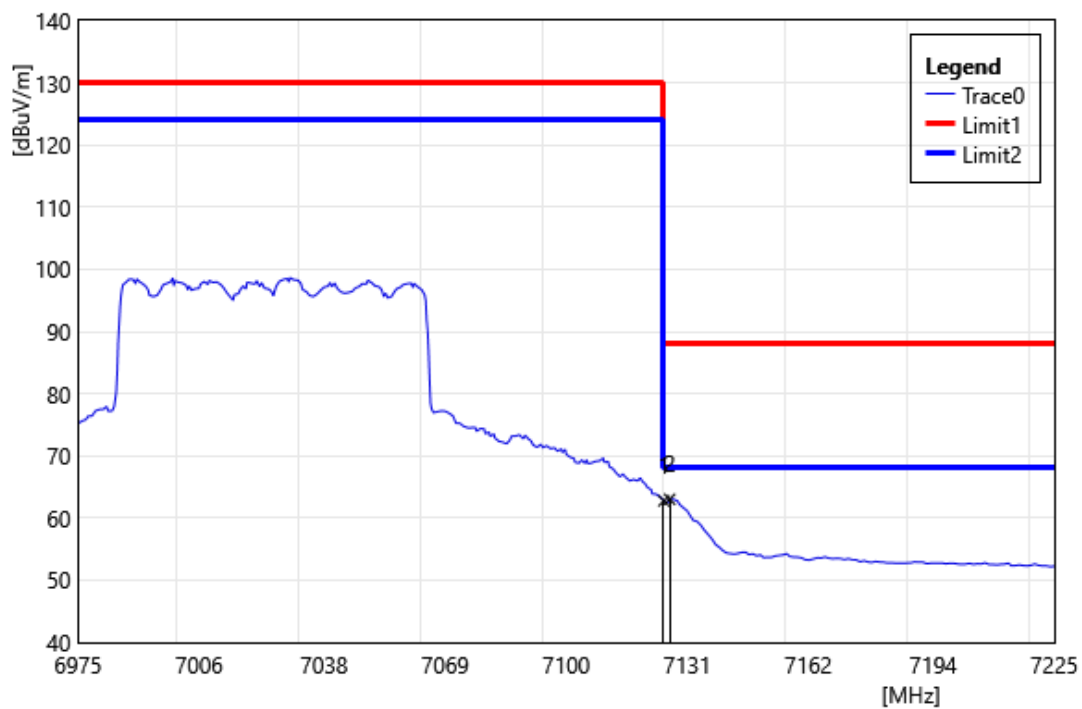


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	57.80	4.98	62.78	68.20	-5.42	AVG
2	7126.50	58.04	4.99	63.03	68.20	-5.17	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

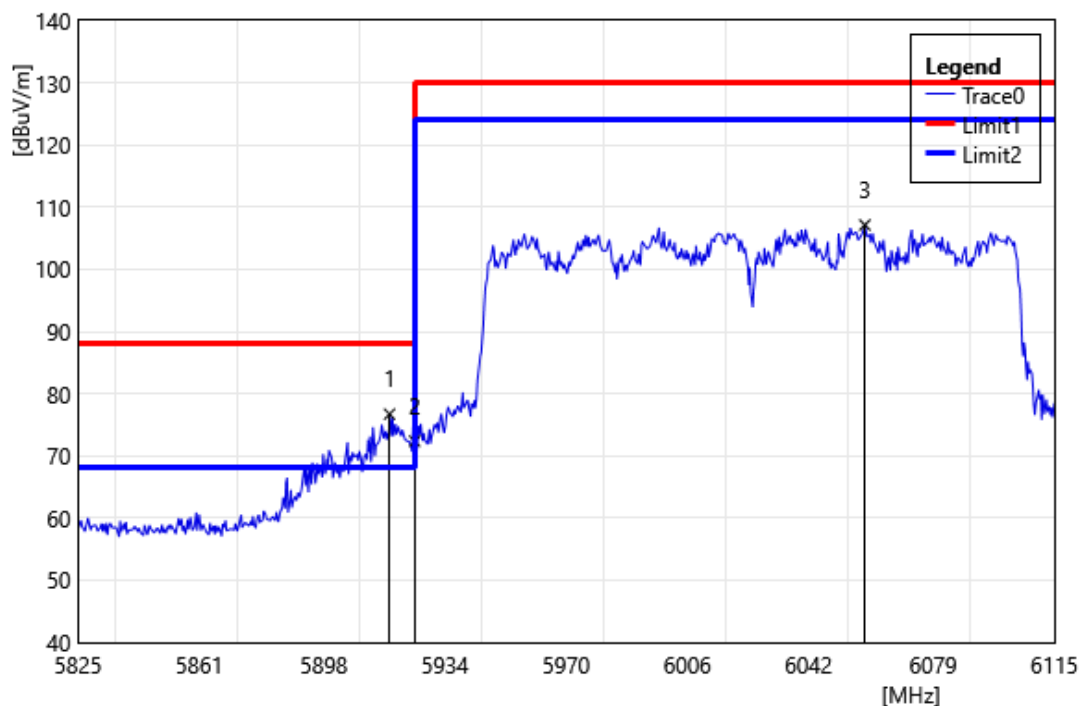


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5917.51	76.01	0.72	76.73	88.20	-11.47	PEAK
2	5925.00	71.70	0.68	72.38	88.20	-15.82	PEAK
3	6058.74	106.24	0.90	107.14	130.00	-22.87	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

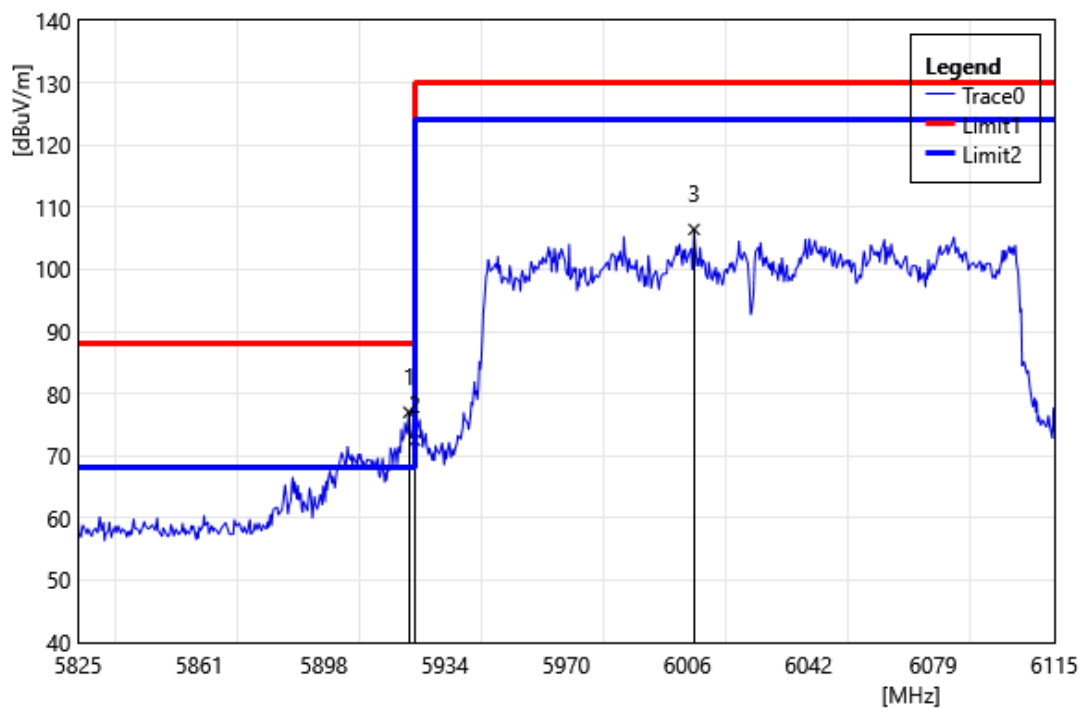


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.31	76.32	0.69	77.01	88.20	-11.19	PEAK
2	5925.00	71.84	0.68	72.52	88.20	-15.68	PEAK
3	6007.99	105.67	0.74	106.41	130.00	-23.59	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

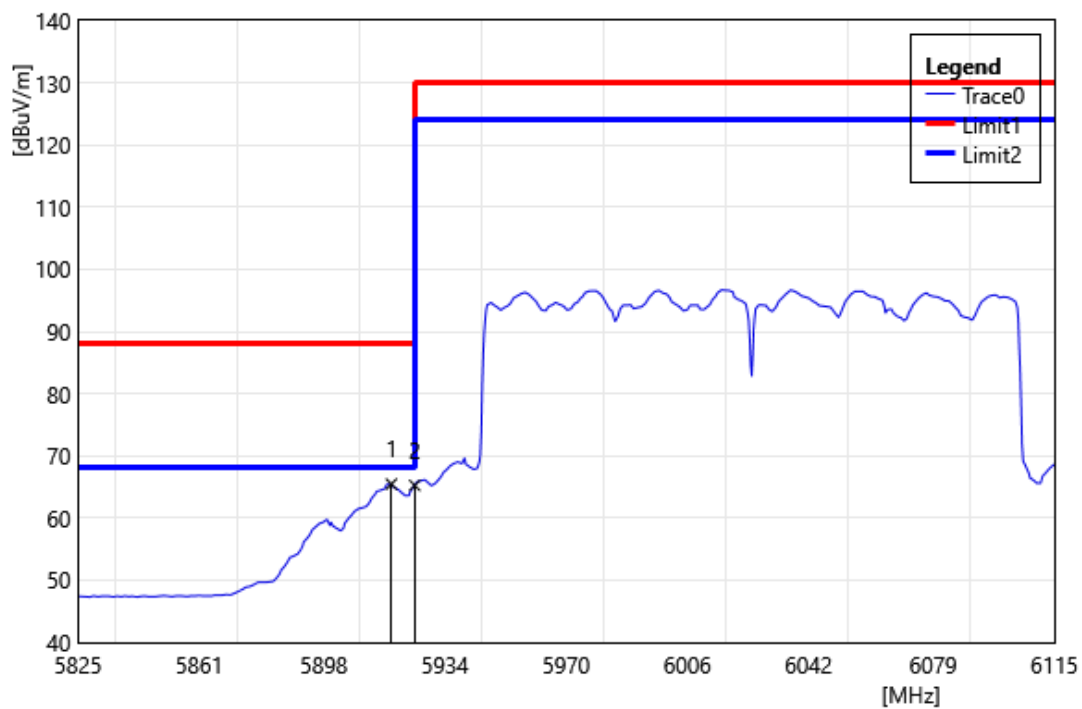


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.09	64.74	0.72	65.46	68.20	-2.74	AVG
2	5925.00	64.58	0.68	65.26	68.20	-2.94	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

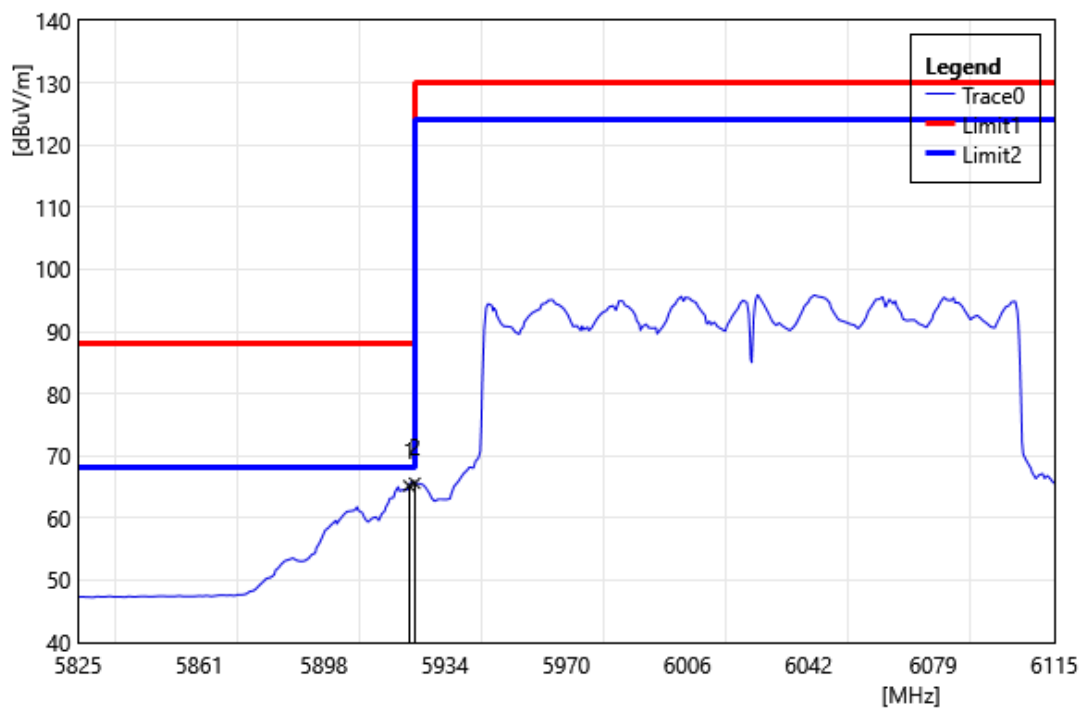


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.31	64.49	0.69	65.18	68.20	-3.02	AVG
2	5925.00	64.93	0.68	65.61	68.20	-2.59	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

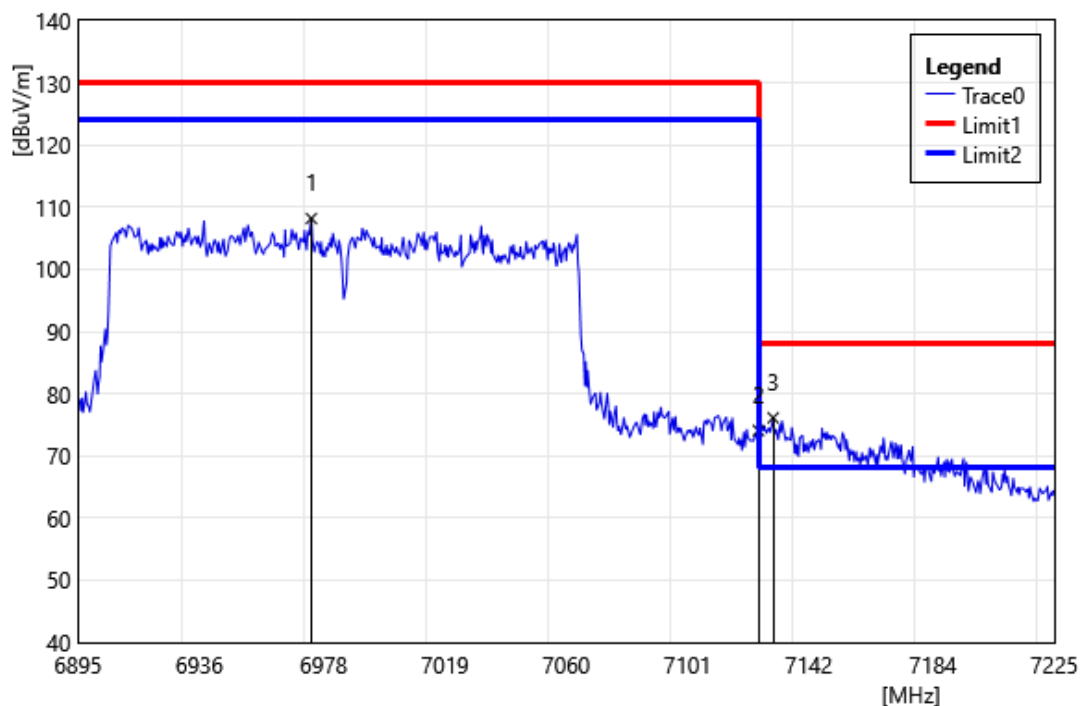


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6973.87	104.08	4.08	108.16	130.00	-21.84	PEAK
2	7125.00	69.09	4.98	74.07	88.20	-14.13	PEAK
3	7129.96	71.13	4.99	76.12	88.20	-12.08	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

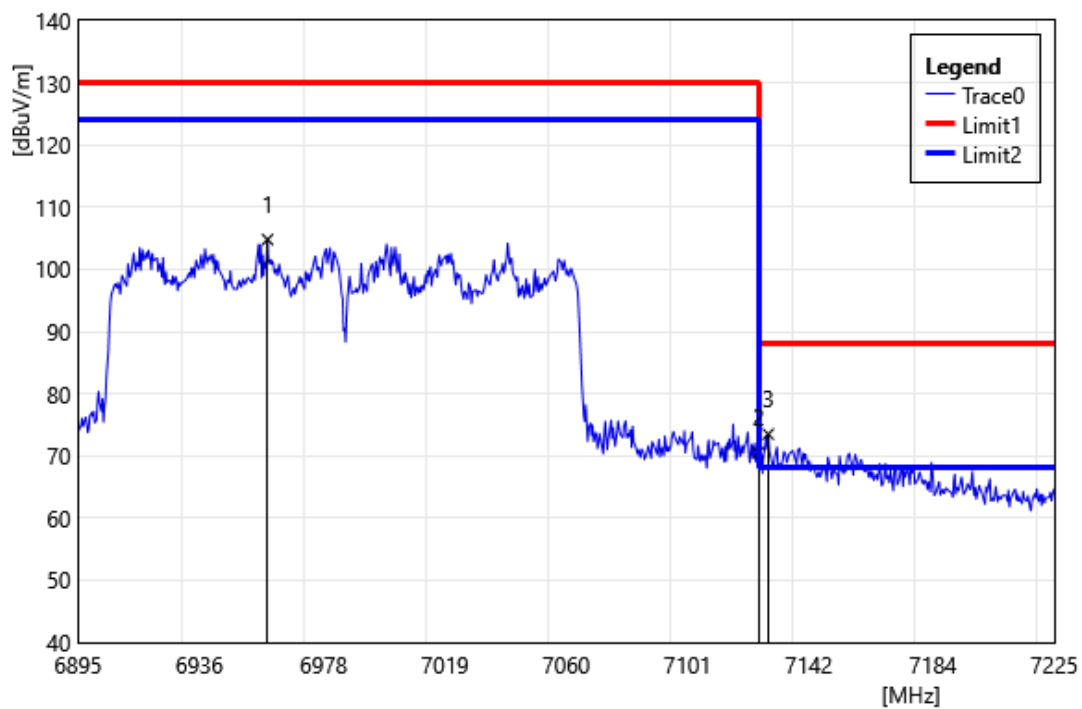


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6959.02	100.75	4.04	104.79	130.00	-25.21	PEAK
2	7125.00	65.56	4.98	70.54	88.20	-17.66	PEAK
3	7128.31	68.50	4.99	73.49	88.20	-14.71	PEAK

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985 MHz		
Polarization:	Vertical		
Remark:			

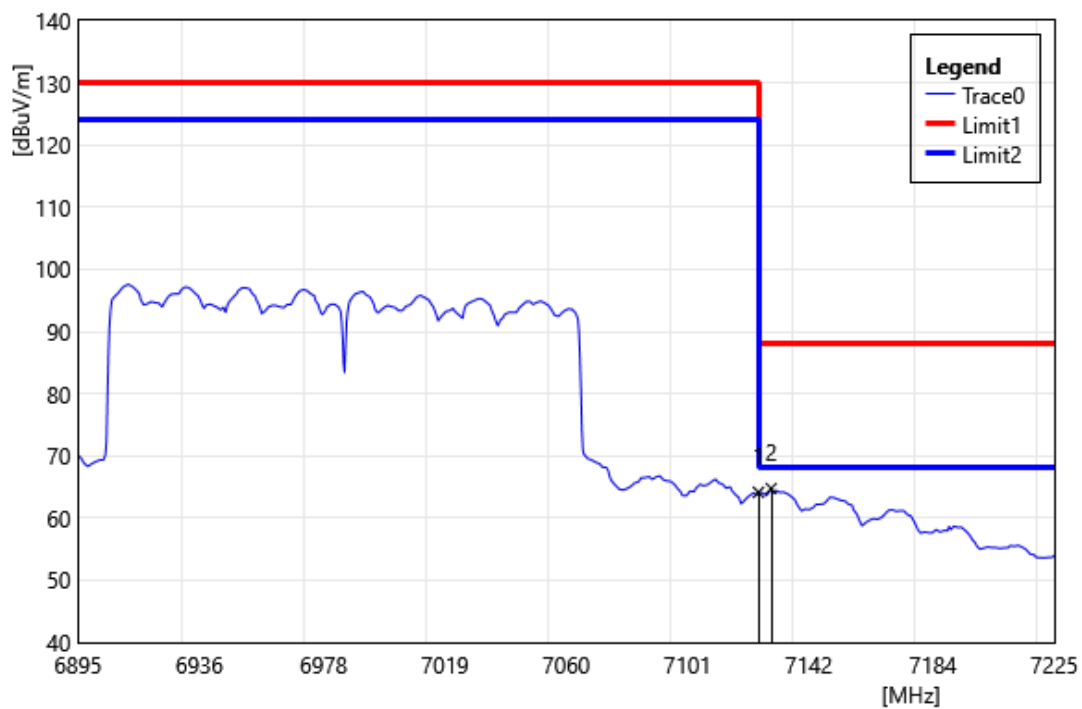


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	59.16	4.98	64.14	68.20	-4.06	AVG
2	7129.30	59.76	4.99	64.75	68.20	-3.45	AVG

Test Site:	966C Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

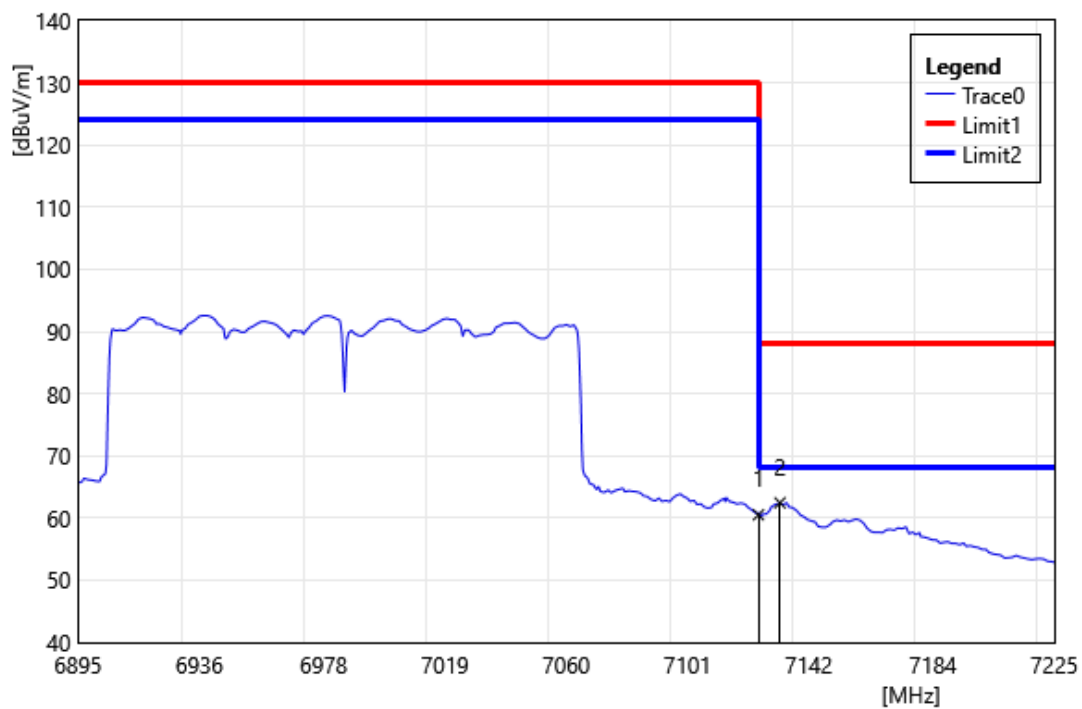


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	55.54	4.98	60.52	68.20	-7.68	AVG
2	7132.27	57.45	5.00	62.45	68.20	-5.75	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

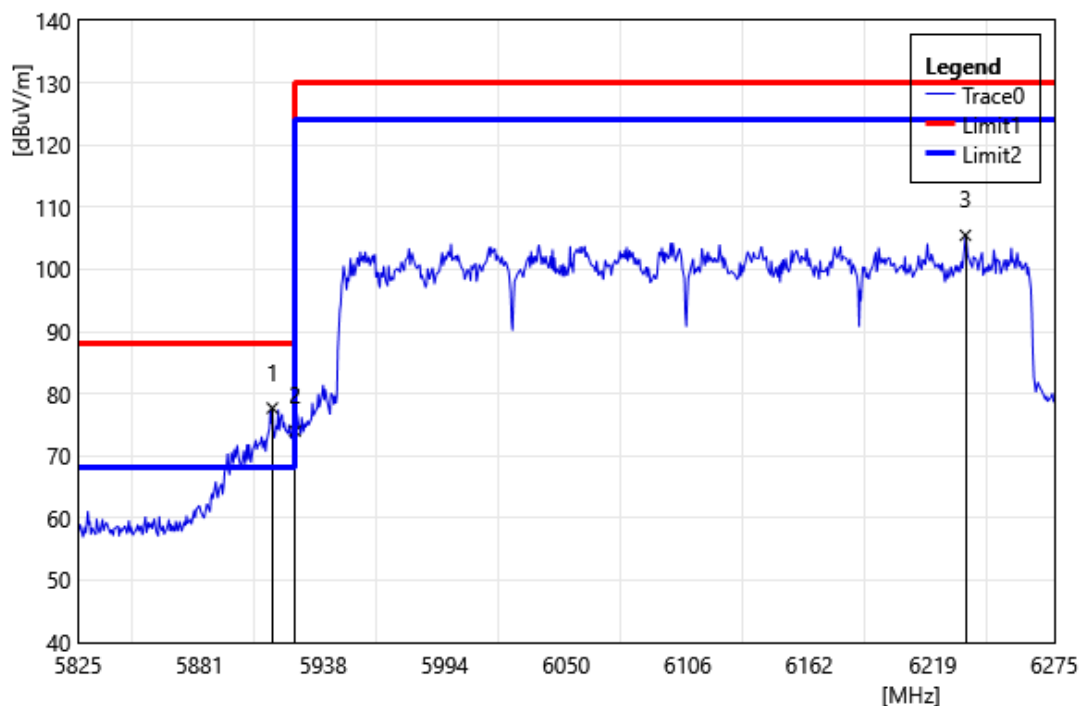


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5914.55	76.95	0.74	77.69	88.20	-10.51	PEAK
2	5925.00	73.32	0.68	74.00	88.20	-14.20	PEAK
3	6234.05	103.88	1.59	105.48	130.00	-24.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

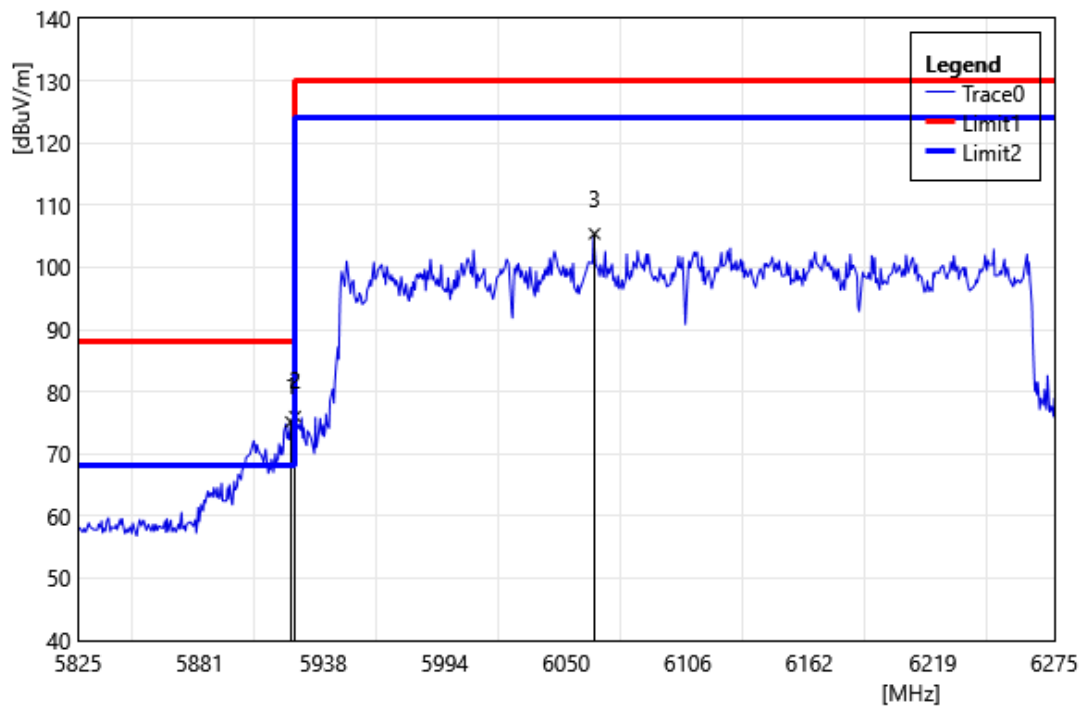


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.10	74.44	0.69	75.13	88.20	-13.07	PEAK
2	5925.00	75.33	0.68	76.01	88.20	-12.19	PEAK
3	6063.05	104.48	0.92	105.40	130.00	-24.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Vertical		
Remark:			

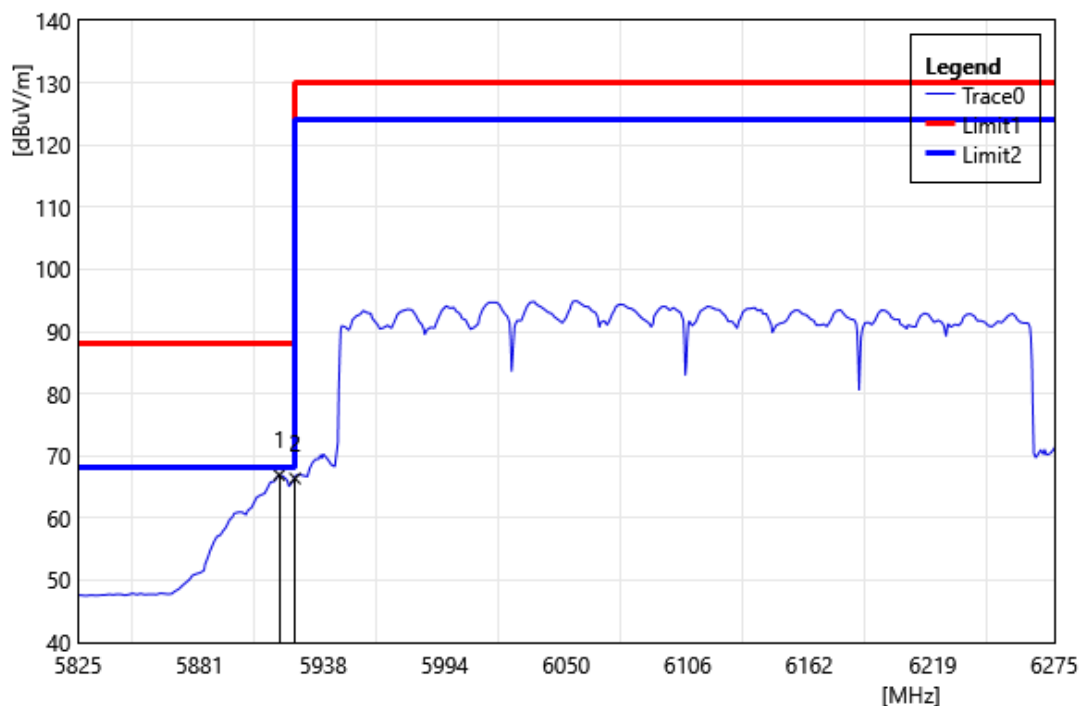


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5917.70	66.19	0.72	66.91	68.20	-1.29	AVG
2	5925.00	65.69	0.68	66.37	68.20	-1.83	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Horizontal		
Remark:			

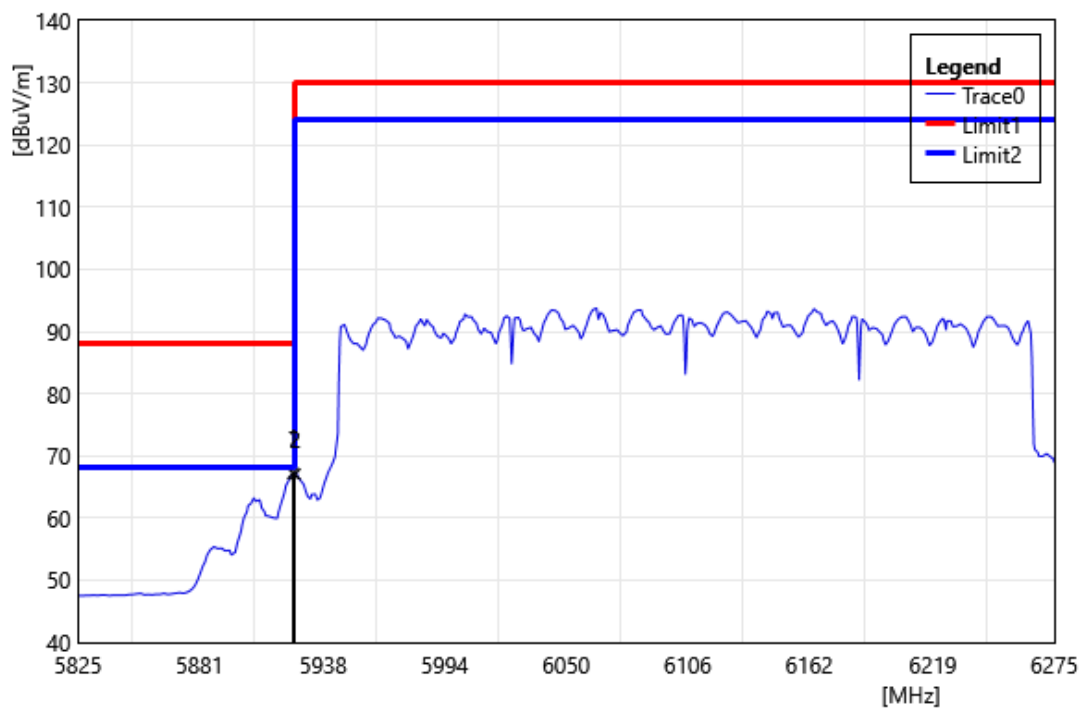


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.00	66.51	0.69	67.20	68.20	-1.00	AVG
2	5925.00	66.37	0.68	67.05	68.20	-1.15	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

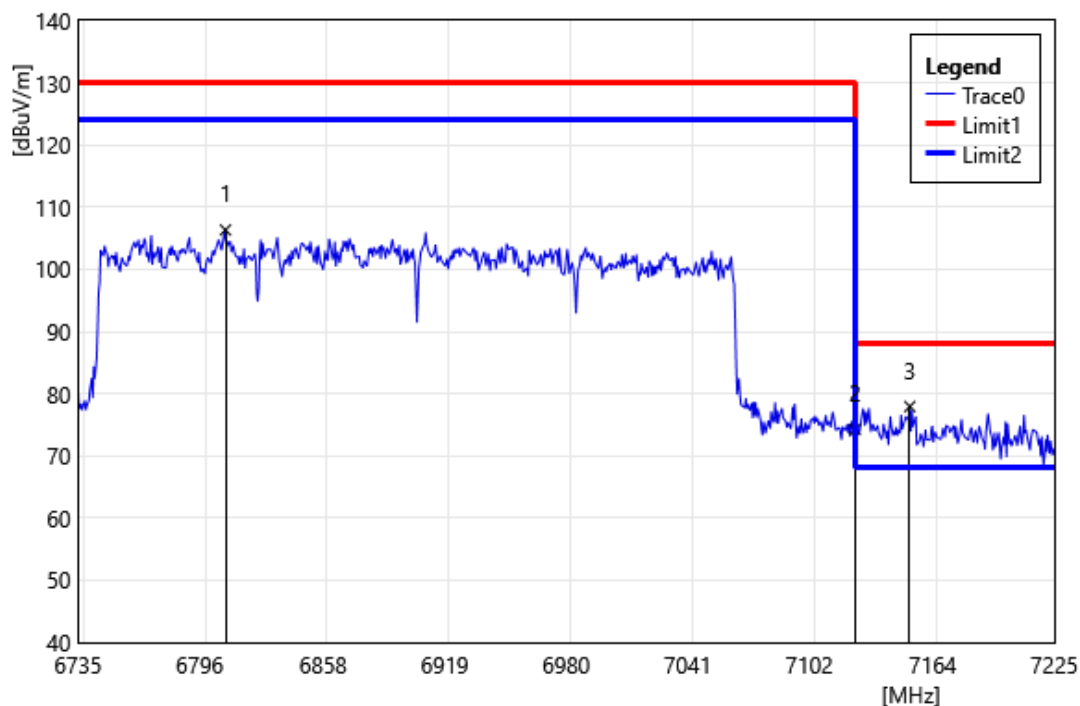


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6808.99	102.81	3.53	106.34	130.00	-23.66	PEAK
2	7125.00	69.26	4.98	74.24	88.20	-13.96	PEAK
3	7152.48	72.86	5.06	77.93	88.20	-10.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Horizontal		
Remark:			

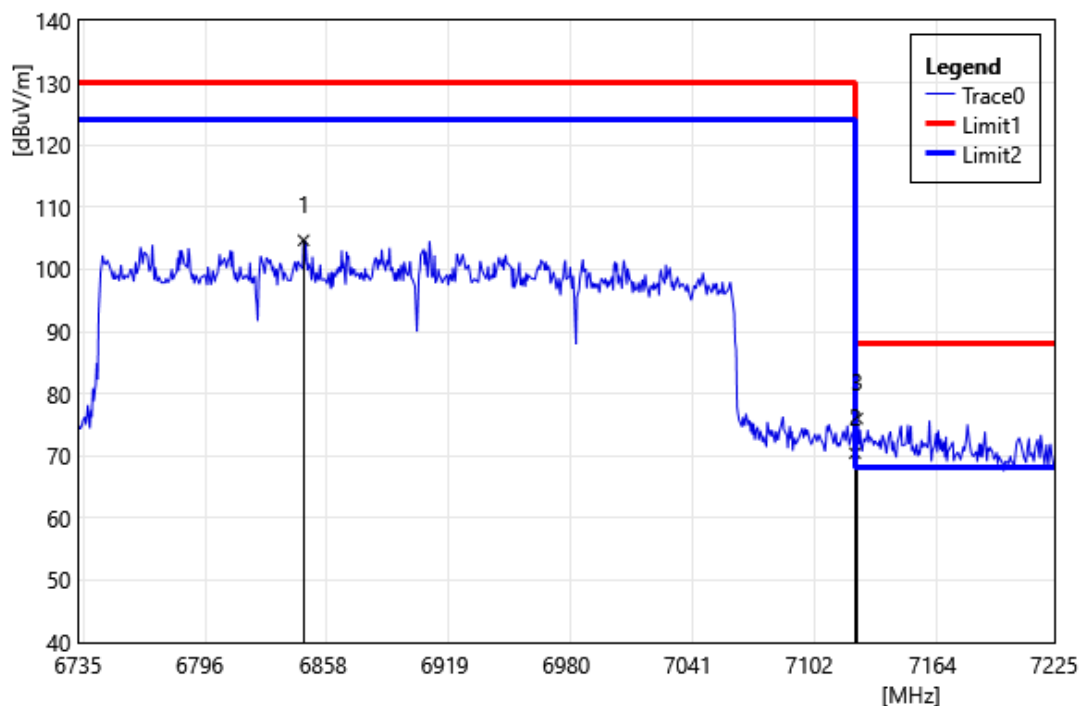


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6848.19	101.04	3.64	104.68	130.00	-25.32	PEAK
2	7125.00	65.47	4.98	70.45	88.20	-17.75	PEAK
3	7126.02	71.03	4.98	76.01	88.20	-12.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

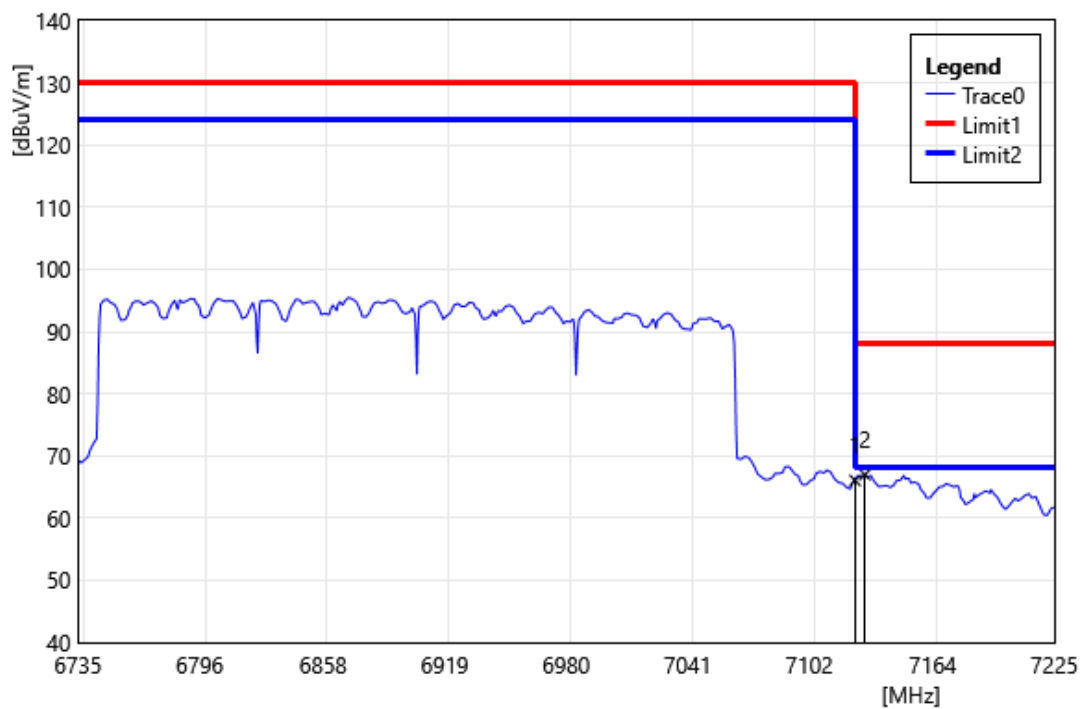

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.07	4.98	66.05	68.20	-2.15	AVG
2	7129.94	61.99	4.99	66.98	68.20	-1.23	AVG


Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Horizontal		
Remark:			

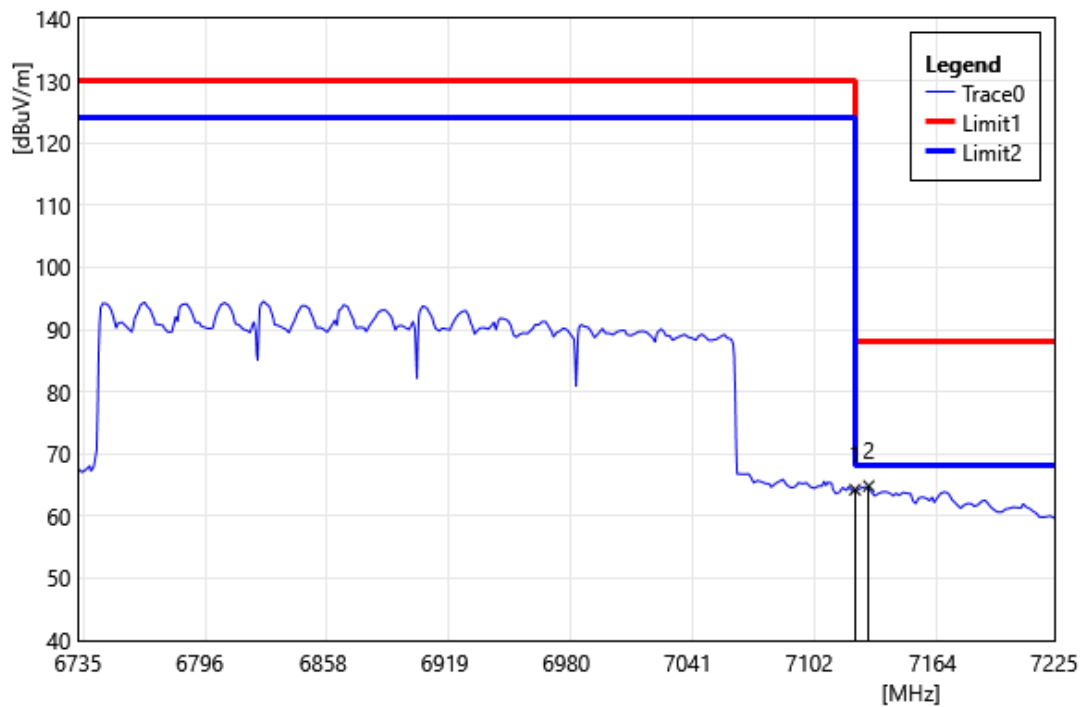

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	59.25	4.98	64.23	68.20	-3.97	AVG
2	7131.90	59.82	5.00	64.82	68.20	-3.38	AVG


Beamforming on- Band Edge

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

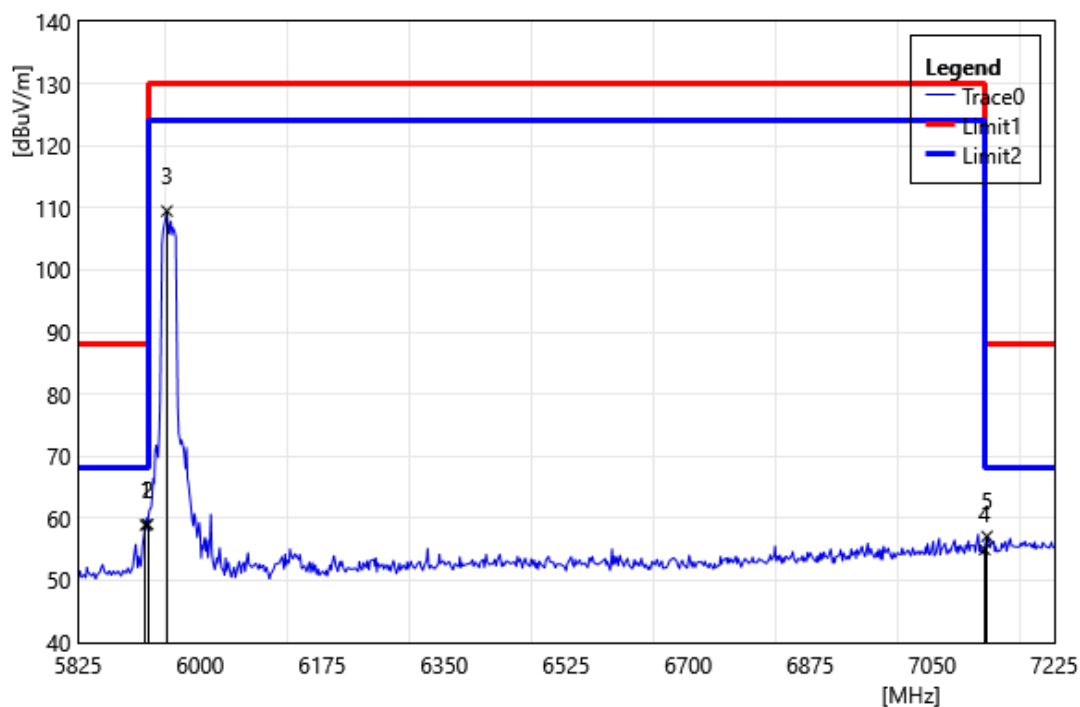


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.60	58.63	0.29	58.92	88.20	-29.28	PEAK
2	5925.00	58.73	0.28	59.01	88.20	-29.19	PEAK
3	5952.40	109.34	0.15	109.49	130.00	-20.51	PEAK
4	7125.00	49.99	4.99	54.98	88.20	-33.22	PEAK
5	7128.40	52.10	5.00	57.10	88.20	-31.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

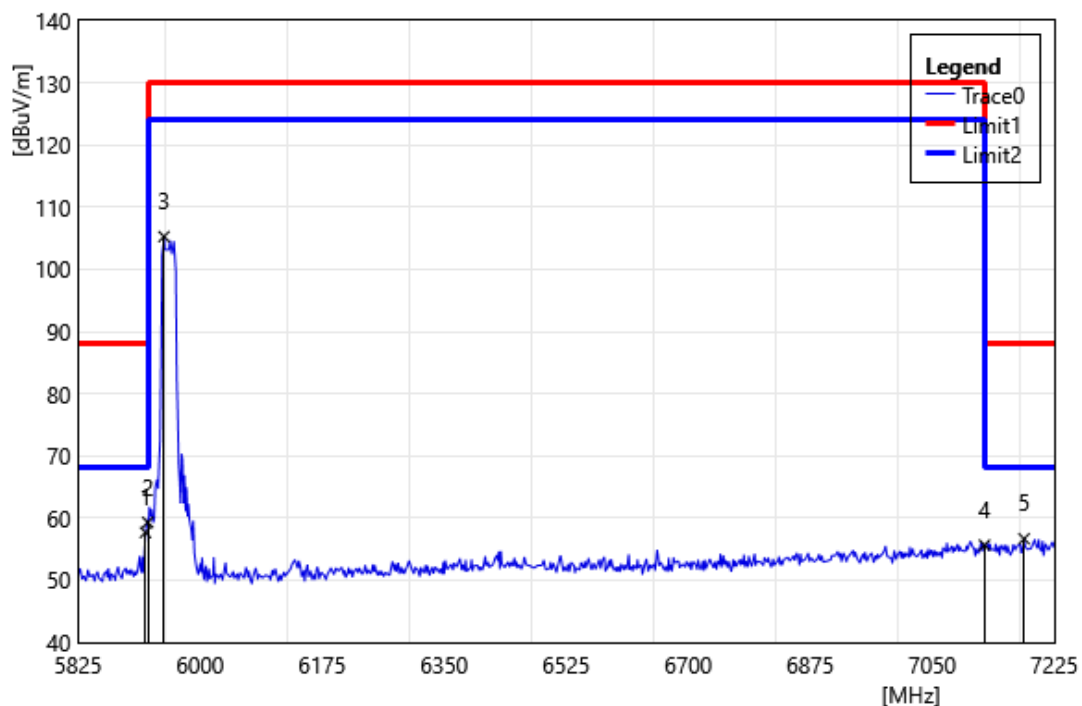


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.60	57.39	0.29	57.68	88.20	-30.52	PEAK
2	5925.00	59.03	0.28	59.31	88.20	-28.89	PEAK
3	5948.20	105.12	0.15	105.27	130.00	-24.73	PEAK
4	7125.00	50.65	4.99	55.64	88.20	-32.56	PEAK
5	7181.60	51.47	5.20	56.67	88.20	-31.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

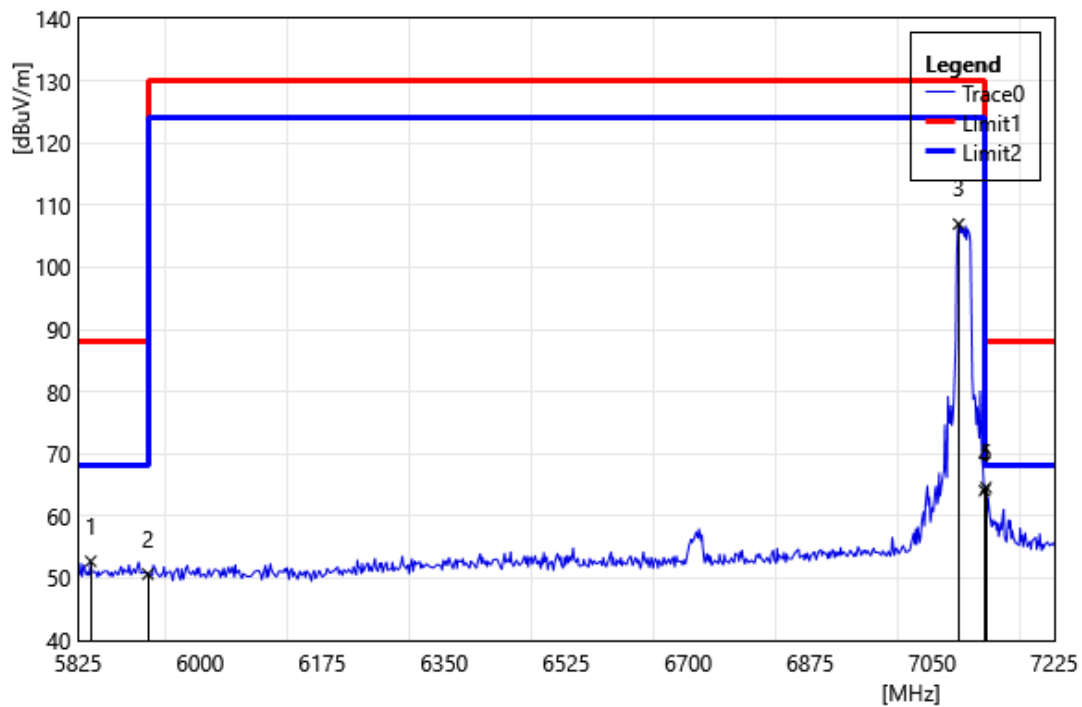


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5843.20	52.46	0.26	52.72	88.20	-35.48	PEAK
2	5925.00	50.38	0.28	50.66	88.20	-37.54	PEAK
3	7087.80	102.15	4.82	106.97	130.00	-23.03	PEAK
4	7125.00	59.10	4.99	64.09	88.20	-24.11	PEAK
5	7127.00	59.60	4.99	64.59	88.20	-23.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

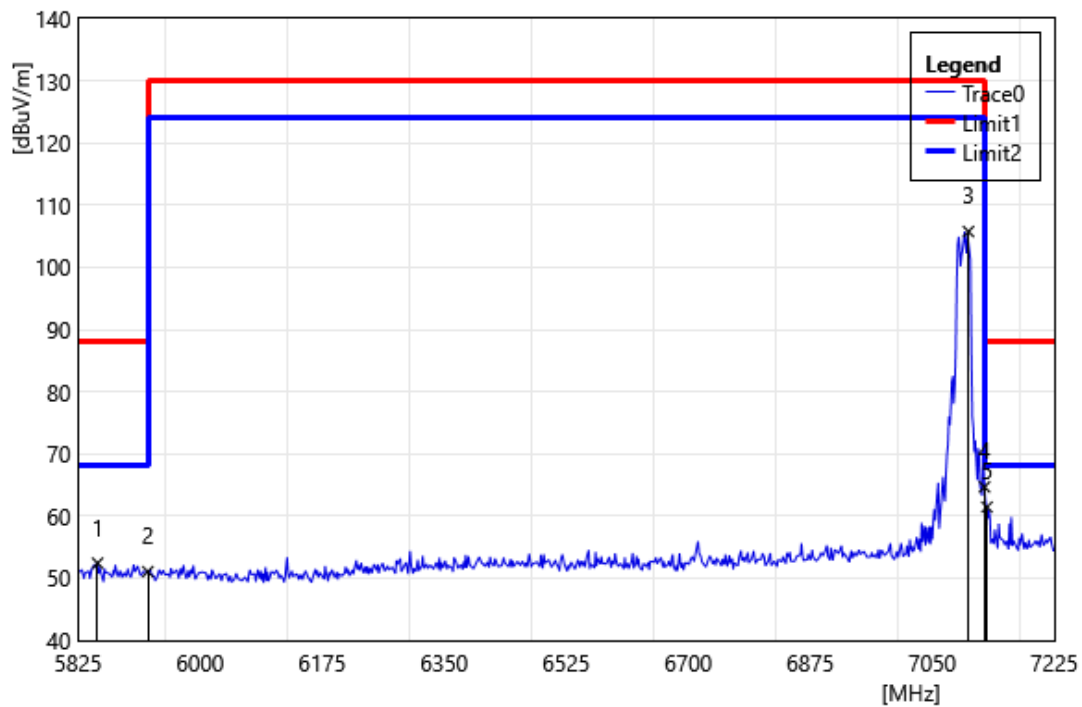


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5853.00	52.14	0.29	52.43	88.20	-35.77	PEAK
2	5925.00	50.79	0.28	51.07	88.20	-37.13	PEAK
3	7101.80	100.83	4.93	105.76	130.00	-24.24	PEAK
4	7125.00	59.69	4.99	64.68	88.20	-23.52	PEAK
5	7128.40	56.45	5.00	61.45	88.20	-26.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

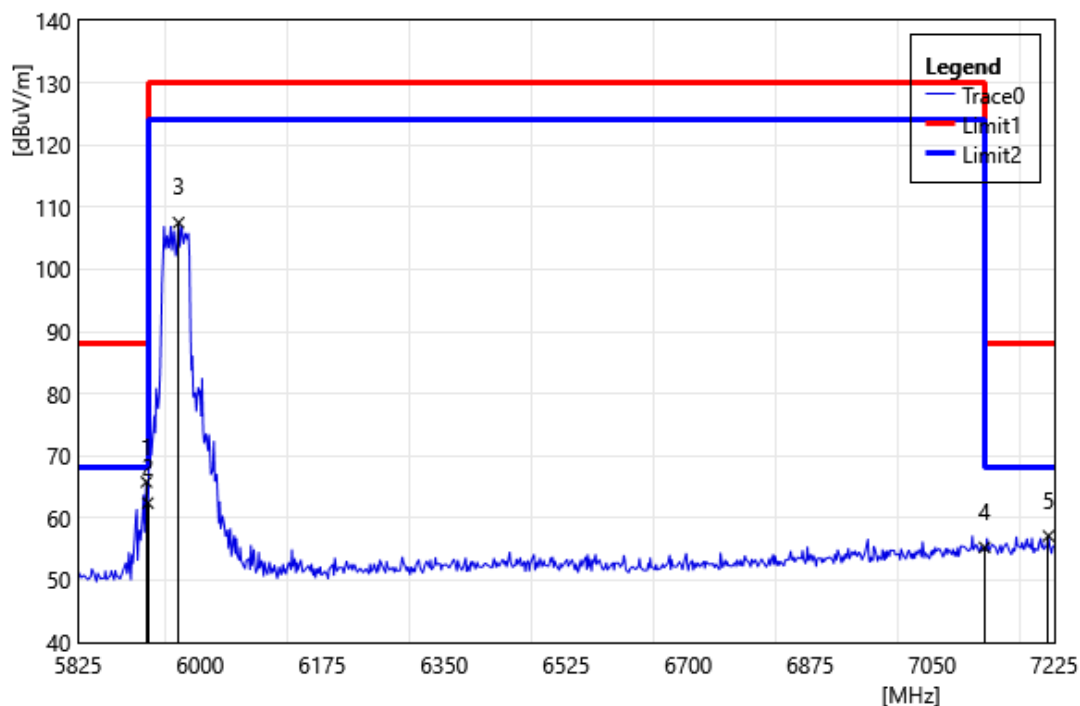


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.00	65.52	0.29	65.81	88.20	-22.39	PEAK
2	5925.00	62.14	0.28	62.42	88.20	-25.78	PEAK
3	5969.20	107.33	0.19	107.52	130.00	-22.48	PEAK
4	7125.00	50.28	4.99	55.27	88.20	-32.93	PEAK
5	7216.60	51.79	5.33	57.12	88.20	-31.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

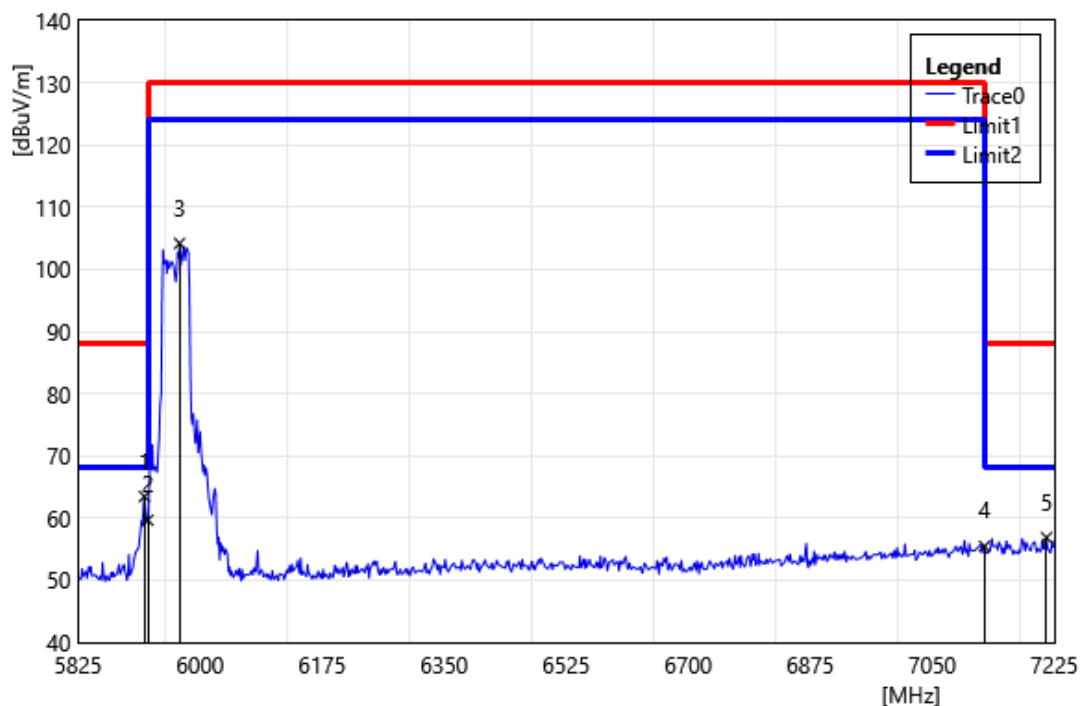


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.20	63.16	0.30	63.46	88.20	-24.74	PEAK
2	5925.00	59.39	0.28	59.67	88.20	-28.53	PEAK
3	5970.60	103.98	0.19	104.17	130.00	-25.83	PEAK
4	7125.00	50.48	4.99	55.47	88.20	-32.73	PEAK
5	7213.80	51.54	5.32	56.86	88.20	-31.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

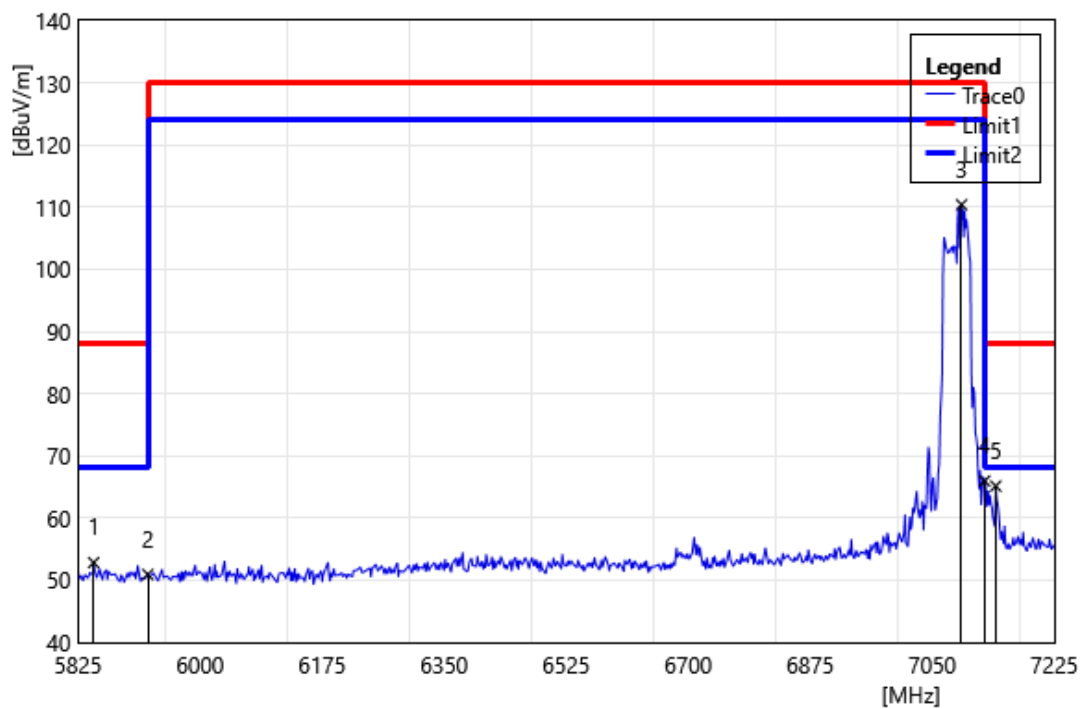


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5847.40	52.57	0.27	52.84	88.20	-35.36	PEAK
2	5925.00	50.65	0.28	50.93	88.20	-37.27	PEAK
3	7092.00	105.55	4.85	110.40	130.00	-19.60	PEAK
4	7125.00	60.98	4.99	65.97	88.20	-22.23	PEAK
5	7141.00	60.12	5.03	65.15	88.20	-23.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

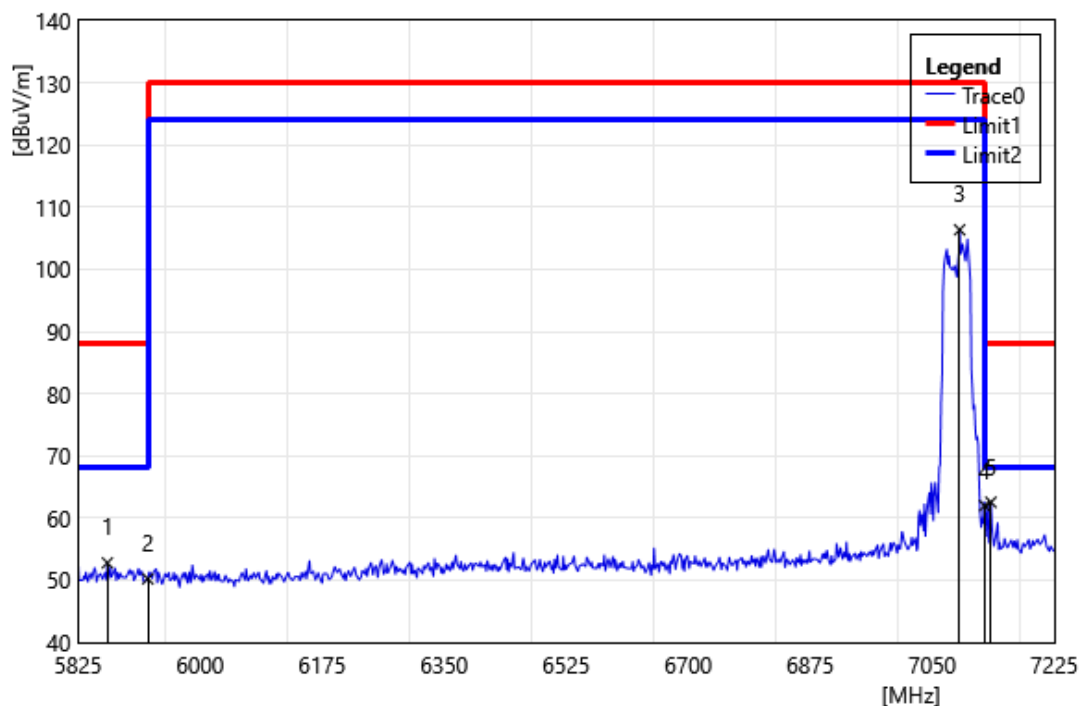


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5867.00	52.47	0.32	52.79	88.20	-35.41	PEAK
2	5925.00	49.95	0.28	50.23	88.20	-37.97	PEAK
3	7089.20	101.54	4.83	106.37	130.00	-23.63	PEAK
4	7125.00	57.00	4.99	61.99	88.20	-26.21	PEAK
5	7134.00	57.53	5.01	62.54	88.20	-25.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

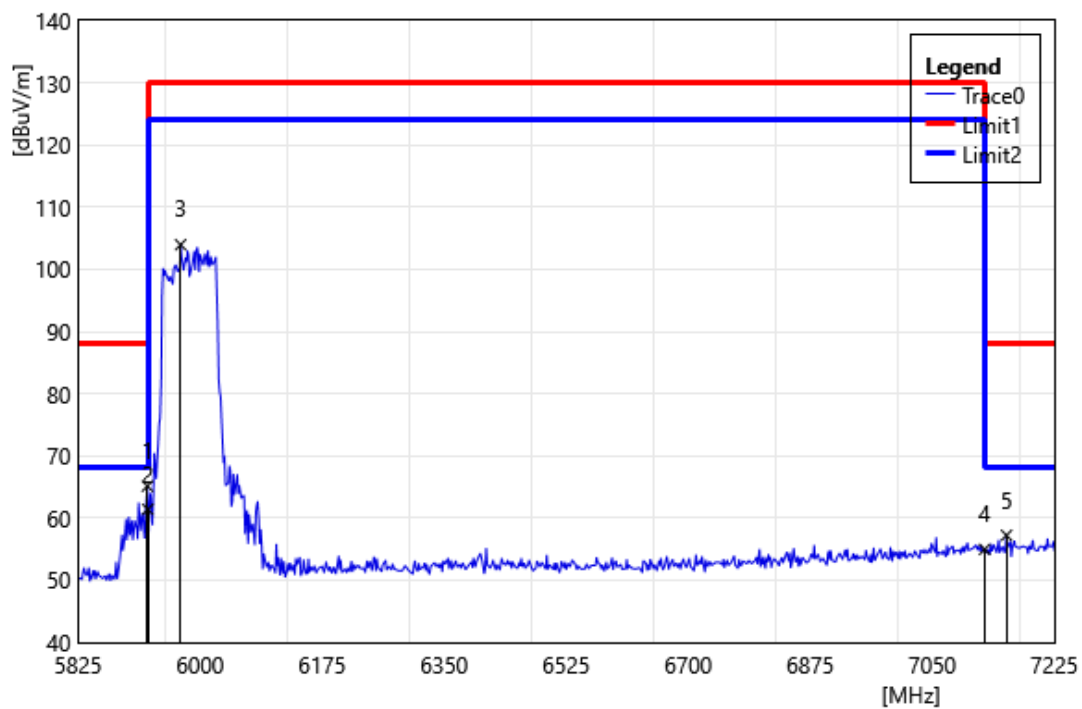


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.40	64.86	0.28	65.14	88.20	-23.06	PEAK
2	5925.00	61.12	0.28	61.40	88.20	-26.81	PEAK
3	5972.00	103.76	0.20	103.96	130.00	-26.04	PEAK
4	7125.00	49.97	4.99	54.96	88.20	-33.24	PEAK
5	7156.40	52.15	5.08	57.23	88.20	-30.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

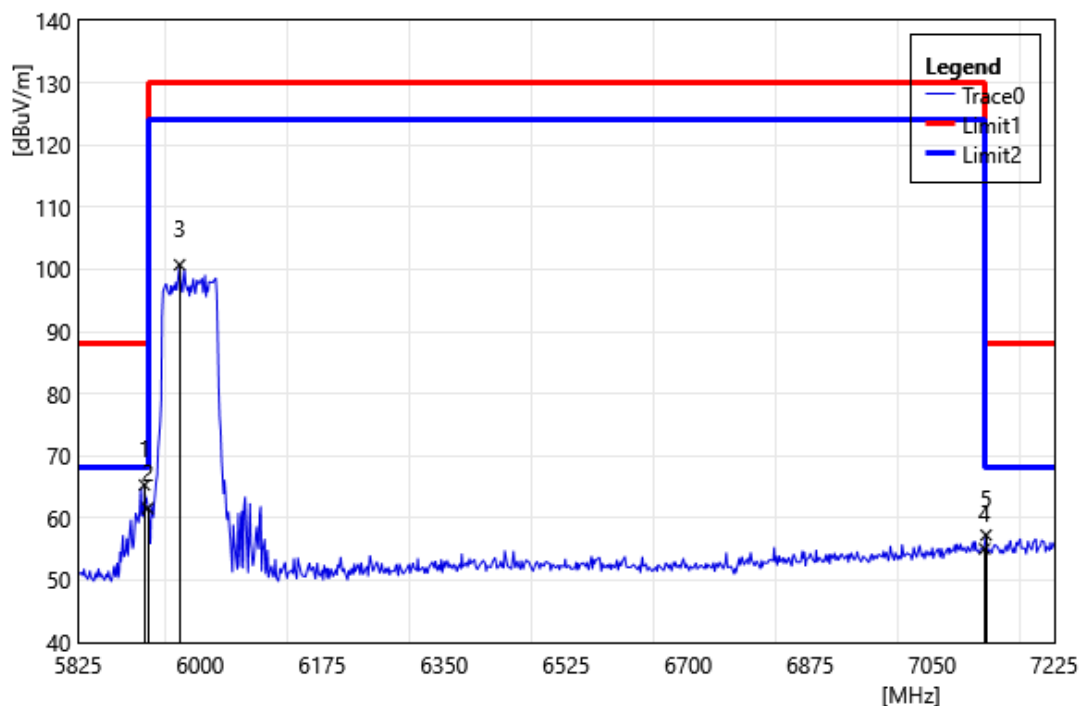


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.20	65.03	0.30	65.33	88.20	-22.87	PEAK
2	5925.00	61.30	0.28	61.58	88.20	-26.62	PEAK
3	5970.60	100.53	0.19	100.72	130.00	-29.28	PEAK
4	7125.00	50.06	4.99	55.05	88.20	-33.15	PEAK
5	7127.00	52.27	4.99	57.26	88.20	-30.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

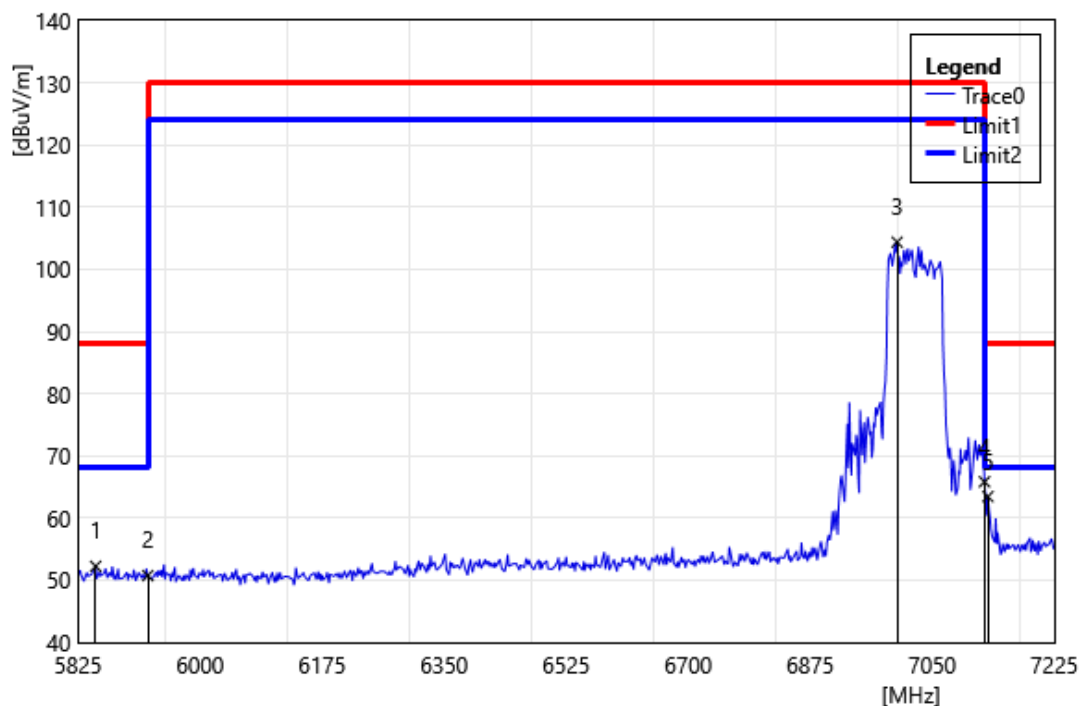


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5850.20	51.97	0.28	52.25	88.20	-35.95	PEAK
2	5925.00	50.46	0.28	50.74	88.20	-37.46	PEAK
3	6999.60	100.22	4.16	104.38	130.00	-25.62	PEAK
4	7125.00	60.85	4.99	65.84	88.20	-22.36	PEAK
5	7129.80	58.45	5.00	63.45	88.20	-24.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

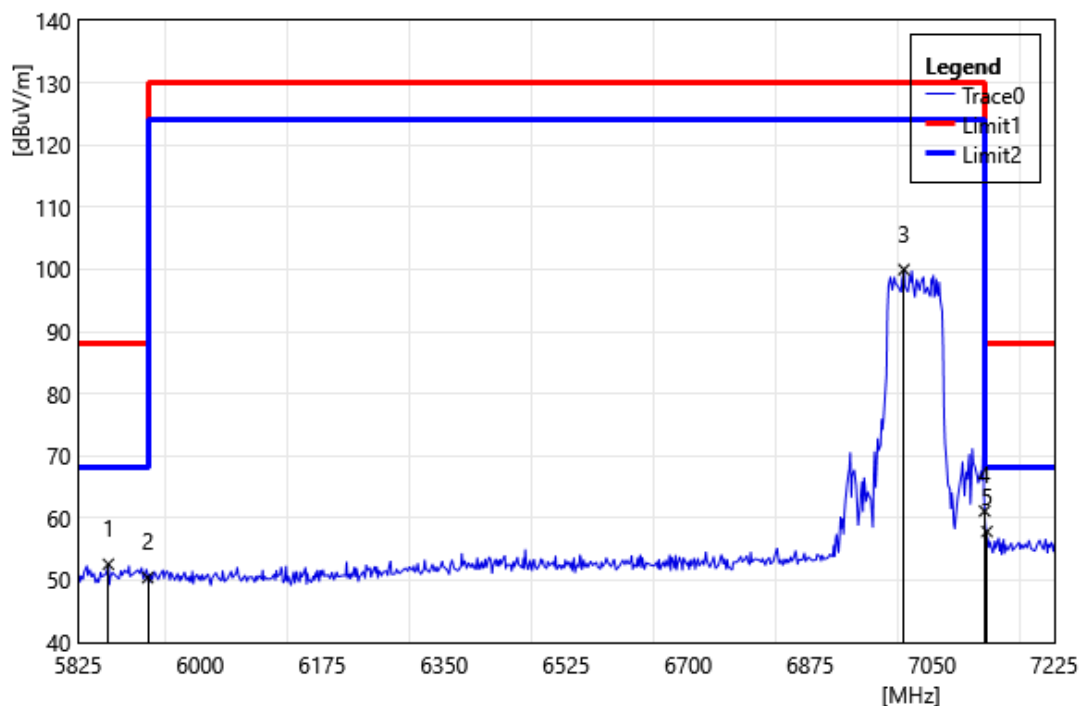


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5868.40	52.25	0.33	52.58	88.20	-35.62	PEAK
2	5925.00	50.14	0.28	50.42	88.20	-37.78	PEAK
3	7009.40	95.74	4.22	99.96	130.00	-30.05	PEAK
4	7125.00	56.14	4.99	61.13	88.20	-27.07	PEAK
5	7128.40	52.82	5.00	57.82	88.20	-30.38	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

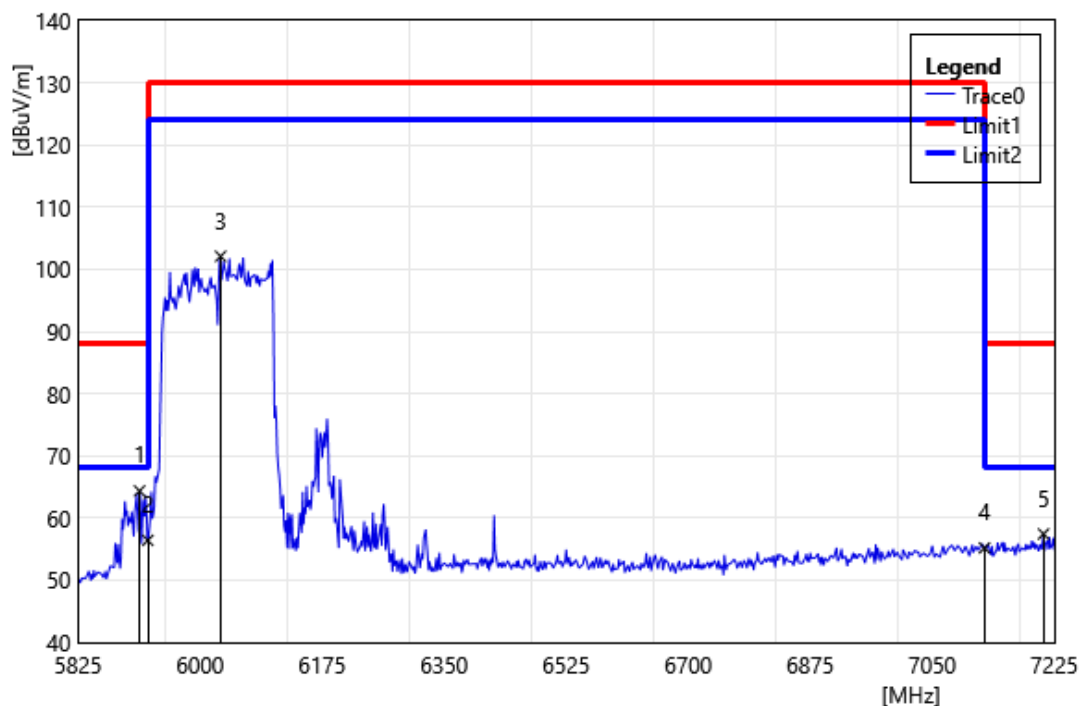


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5913.20	64.04	0.34	64.38	88.20	-23.83	PEAK
2	5925.00	56.14	0.28	56.42	88.20	-31.78	PEAK
3	6029.40	101.75	0.36	102.11	130.00	-27.89	PEAK
4	7125.00	50.21	4.99	55.20	88.20	-33.00	PEAK
5	7209.60	52.12	5.31	57.43	88.20	-30.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

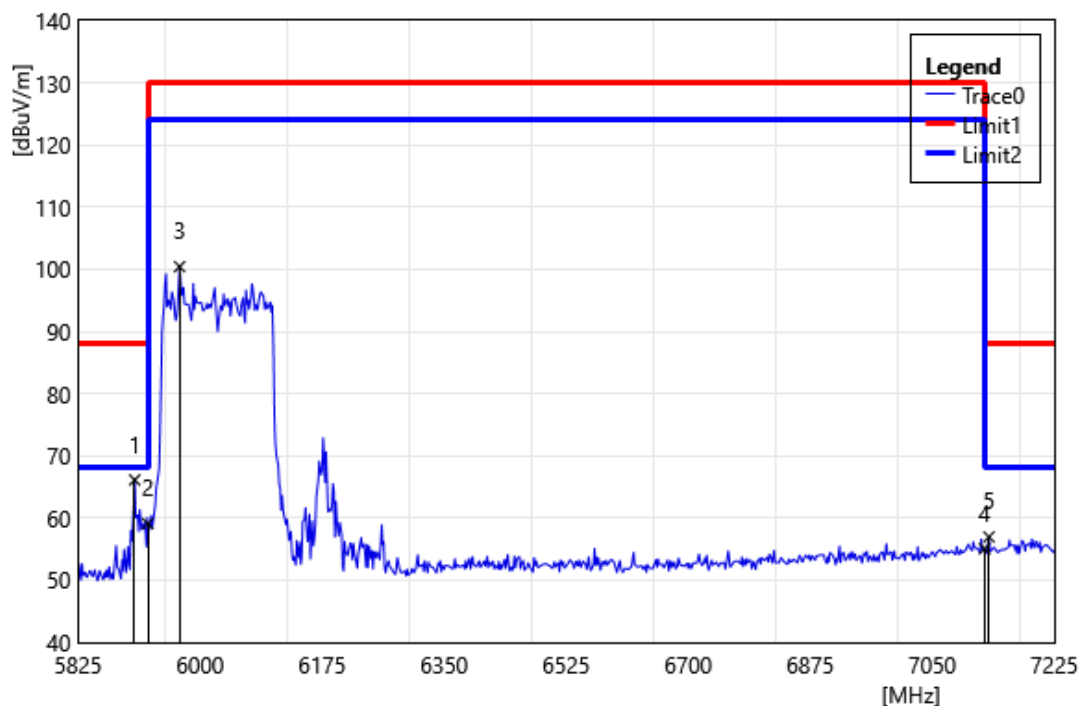


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5906.20	65.75	0.38	66.13	88.20	-22.07	PEAK
2	5925.00	58.83	0.28	59.11	88.20	-29.09	PEAK
3	5970.60	100.24	0.19	100.43	130.00	-29.57	PEAK
4	7125.00	50.08	4.99	55.07	88.20	-33.13	PEAK
5	7131.20	51.96	5.00	56.96	88.20	-31.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

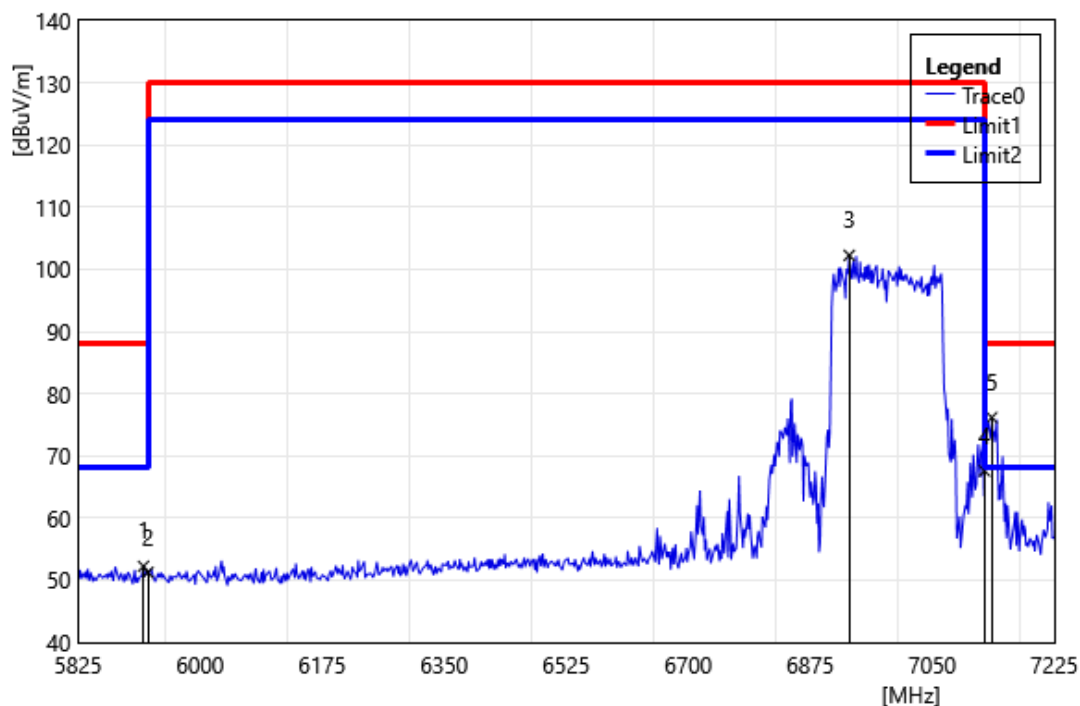


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.80	51.93	0.31	52.24	88.20	-35.96	PEAK
2	5925.00	50.97	0.28	51.25	88.20	-36.95	PEAK
3	6931.00	98.30	3.94	102.24	130.00	-27.76	PEAK
4	7125.00	62.60	4.99	67.59	88.20	-20.61	PEAK
5	7135.40	71.16	5.01	76.17	88.20	-12.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

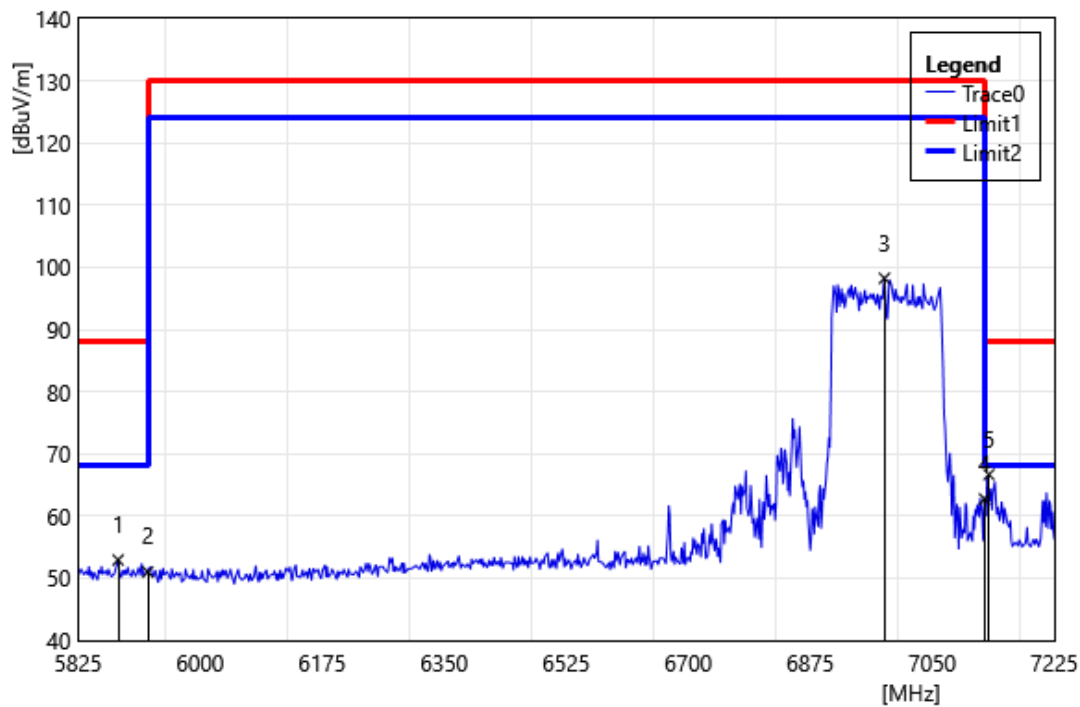


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5882.40	52.58	0.36	52.94	88.20	-35.27	PEAK
2	5925.00	50.72	0.28	51.00	88.20	-37.20	PEAK
3	6981.40	94.13	4.10	98.23	130.00	-31.77	PEAK
4	7125.00	57.76	4.99	62.75	88.20	-25.45	PEAK
5	7131.20	61.68	5.00	66.68	88.20	-21.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

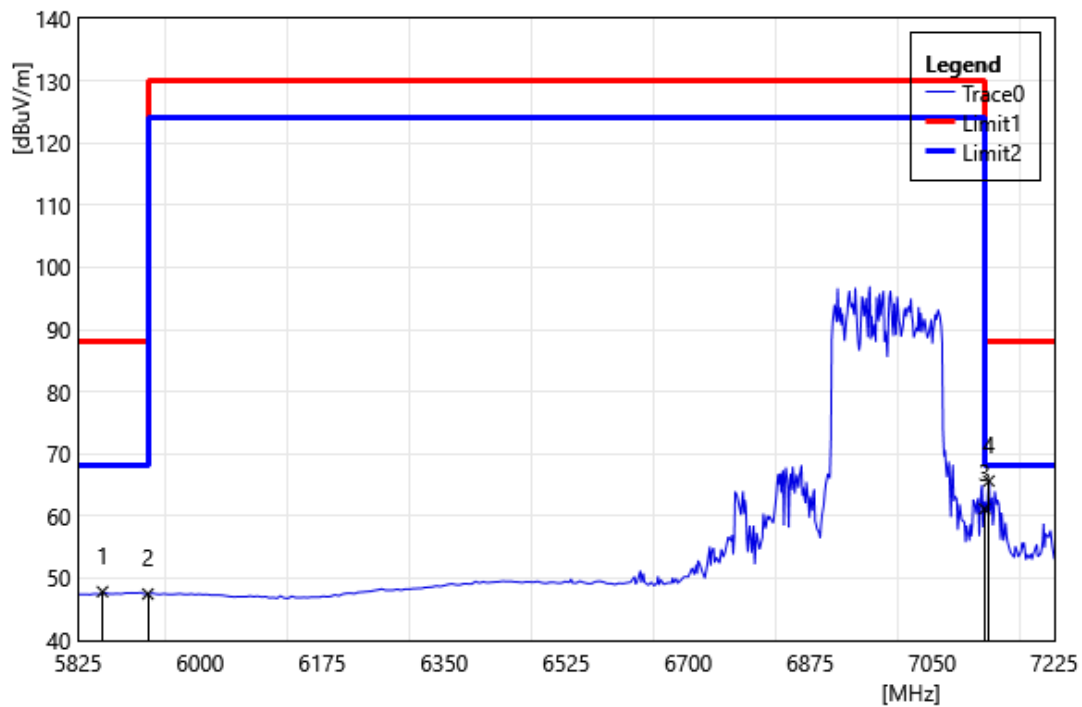


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5860.00	47.51	0.31	47.82	68.20	-20.38	AVG
2	5925.00	47.18	0.28	47.46	68.20	-20.74	AVG
3	7125.00	56.14	4.99	61.13	68.20	-7.07	AVG
4	7131.20	60.64	5.00	65.64	68.20	-2.56	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

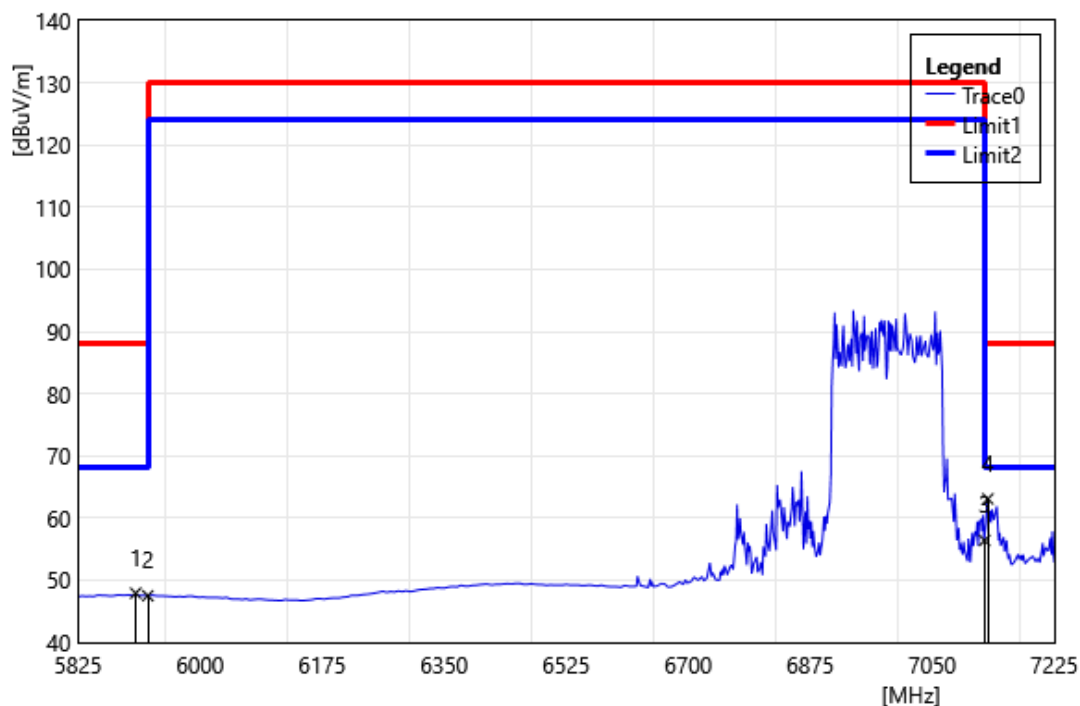


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5907.60	47.55	0.37	47.92	68.20	-20.28	AVG
2	5925.00	47.23	0.28	47.51	68.20	-20.69	AVG
3	7125.00	51.41	4.99	56.40	68.20	-11.80	AVG
4	7129.80	58.09	5.00	63.09	68.20	-5.11	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105 MHz		
Polarization:	Vertical		
Remark:			

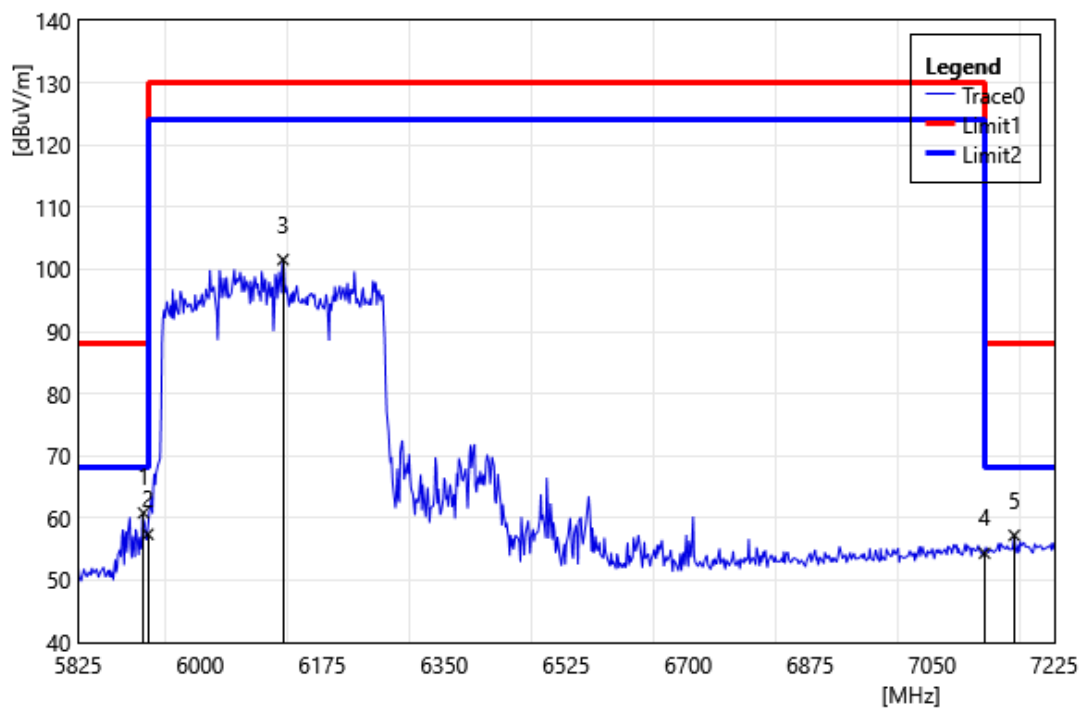


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.80	60.52	0.31	60.83	88.20	-27.37	PEAK
2	5925.00	57.11	0.28	57.39	88.20	-30.81	PEAK
3	6119.00	100.81	0.75	101.56	130.00	-28.44	PEAK
4	7125.00	49.36	4.99	54.35	88.20	-33.85	PEAK
5	7167.60	52.10	5.13	57.23	88.20	-30.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

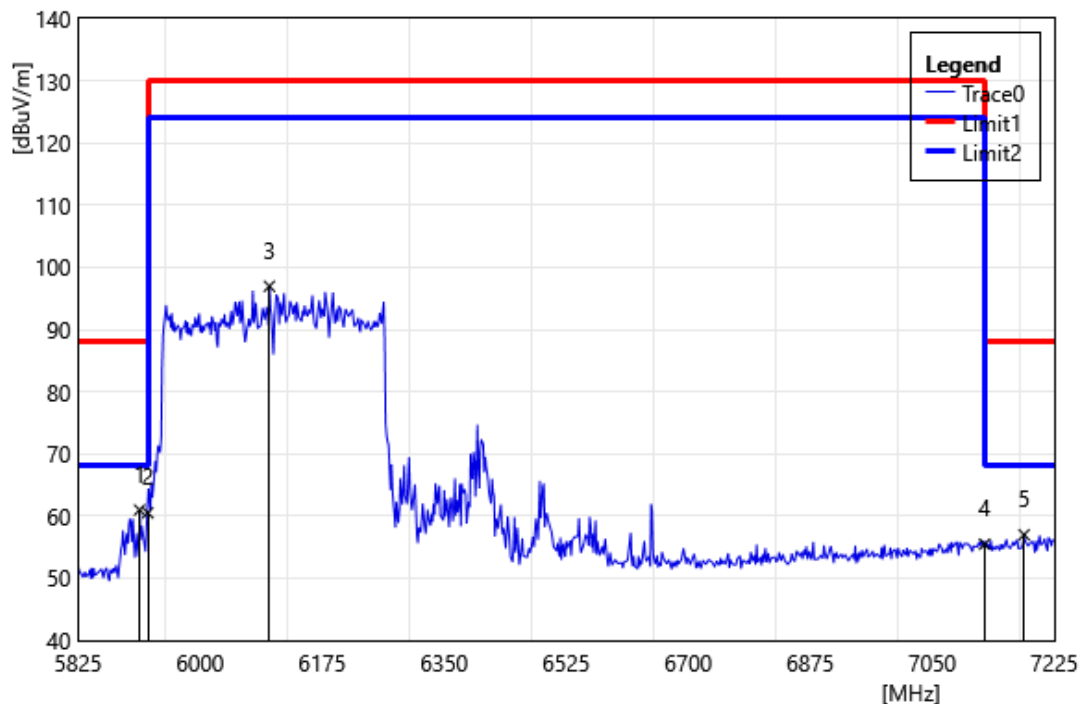

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5913.20	60.64	0.34	60.98	88.20	-27.22	PEAK
2	5925.00	60.24	0.28	60.52	88.20	-27.68	PEAK
3	6099.40	96.26	0.69	96.95	130.00	-33.05	PEAK
4	7125.00	50.49	4.99	55.48	88.20	-32.72	PEAK
5	7181.60	51.79	5.20	56.99	88.20	-31.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Vertical		
Remark:			

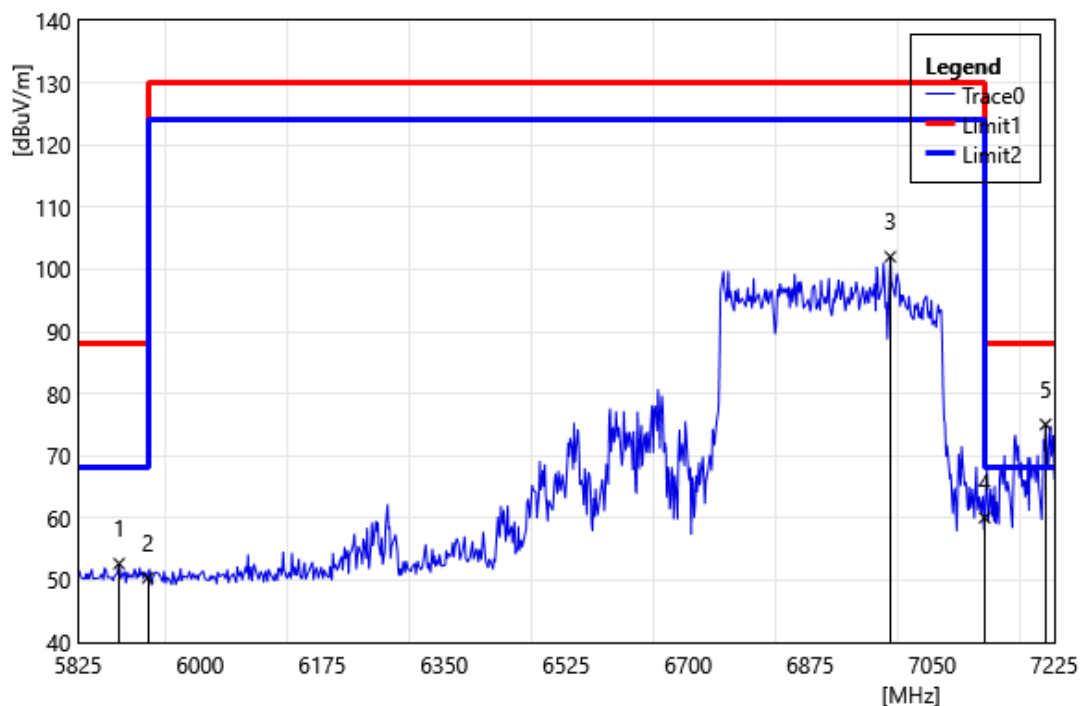

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5883.80	52.30	0.37	52.67	88.20	-35.53	PEAK
2	5925.00	50.09	0.28	50.37	88.20	-37.83	PEAK
3	6989.80	97.90	4.13	102.03	130.00	-27.97	PEAK
4	7125.00	55.06	4.99	60.05	88.20	-28.15	PEAK
5	7212.40	69.75	5.31	75.06	88.20	-13.14	PEAK