



Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905 MHz		
Polarization:	Horizontal		
Remark:			

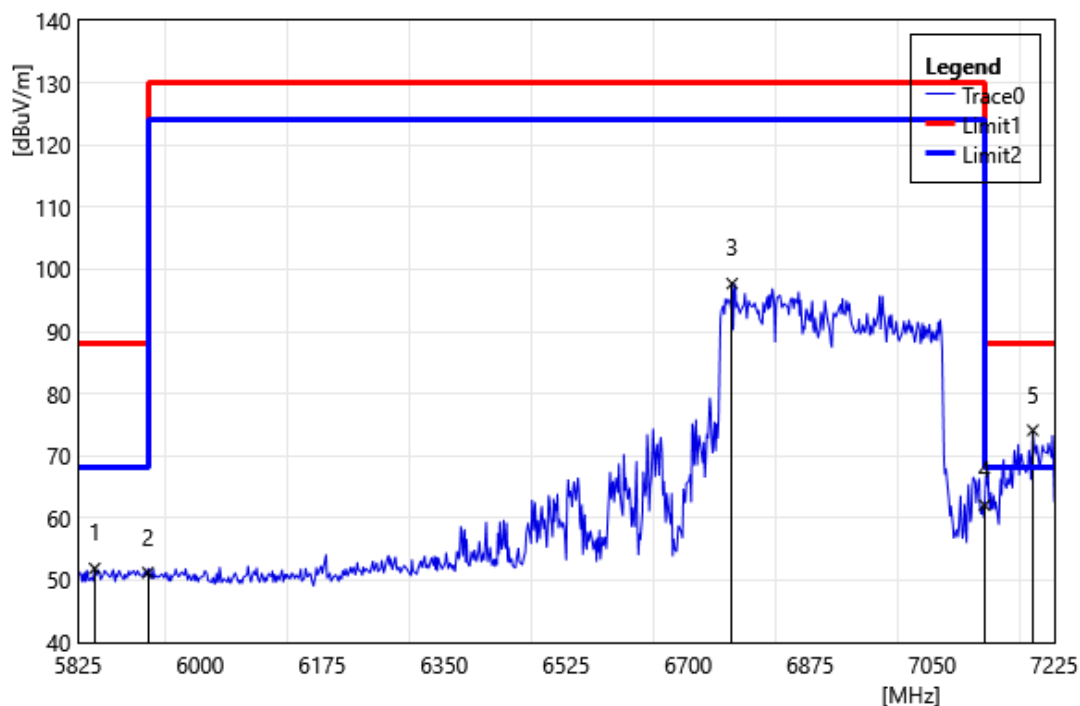


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5848.80	51.61	0.28	51.89	88.20	-36.31	PEAK
2	5925.00	50.94	0.28	51.22	88.20	-36.98	PEAK
3	6763.00	94.48	3.24	97.72	130.00	-32.28	PEAK
4	7125.00	57.07	4.99	62.06	88.20	-26.14	PEAK
5	7194.20	68.86	5.26	74.12	88.20	-14.08	PEAK

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Vertical		
Remark:			

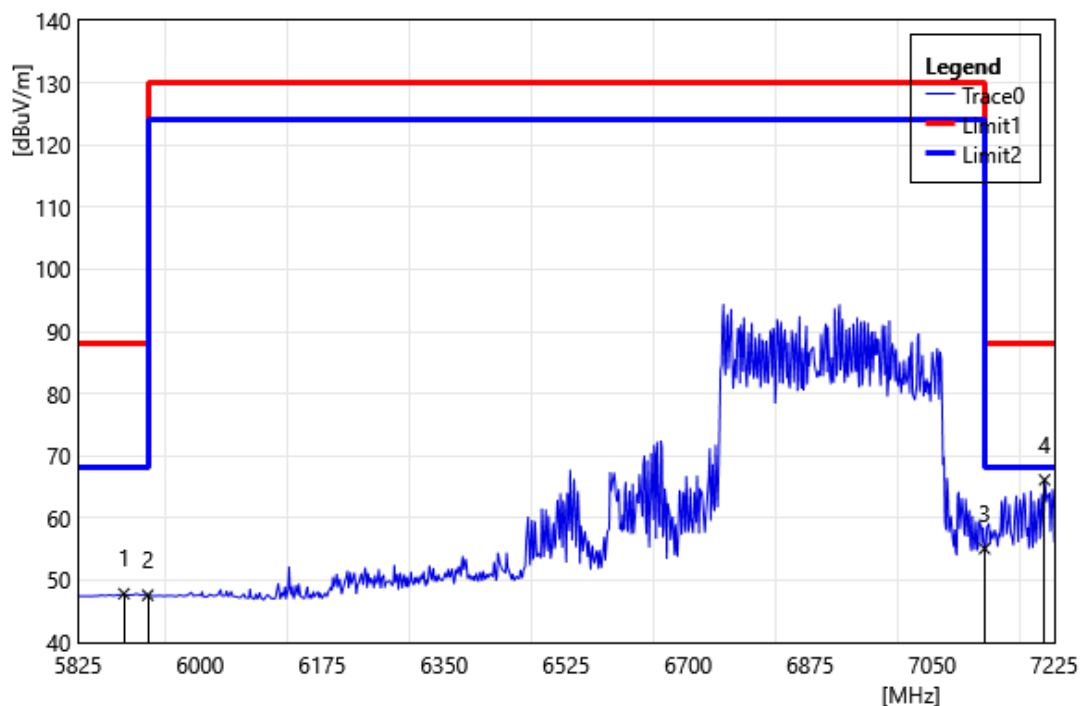

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5890.80	47.43	0.39	47.82	68.20	-20.38	AVG
2	5925.00	47.31	0.28	47.59	68.20	-20.61	AVG
3	7125.00	50.10	4.99	55.09	68.20	-13.11	AVG
4	7211.00	60.83	5.31	66.14	68.20	-2.06	AVG

Test Site:	966 Chamber	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Horizontal		
Remark:			

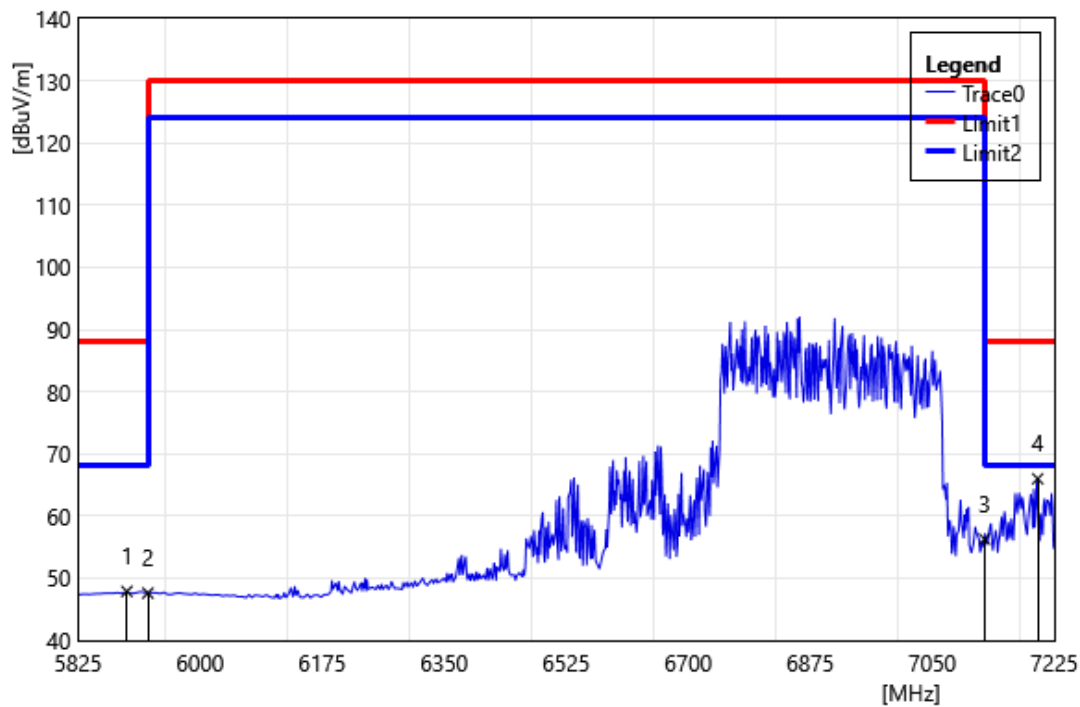

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5895.00	47.48	0.40	47.88	68.20	-20.32	AVG
2	5925.00	47.33	0.28	47.61	68.20	-20.59	AVG
3	7125.00	51.29	4.99	56.28	68.20	-11.92	AVG
4	7201.20	60.70	5.29	65.99	68.20	-2.21	AVG

5.3. Conducted Test Results

5.3.1. Duty cycle

Duty cycle

1X1							
Duty Cycle							
Mode	Frequency (MHz)	On time (ms)	On+off time (ms)	Duty cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11ax_20	5955	5.452	5.458	99.89	0.00	0.00	0.01
802.11ax_40	5965	5.462	5.638	96.88	0.14	0.18	1.00
802.11ax_80	5985	5.462	5.628	97.05	0.13	0.18	1.00
802.11ax_160	6025	5.462	5.638	96.88	0.14	0.18	1.00
802.11be_20	5955	5.458	5.464	99.89	0.00	0.00	0.01
802.11be_40	5965	5.468	5.654	96.71	0.15	0.18	1.00
802.11be_80	5985	5.468	5.654	96.71	0.15	0.18	1.00
802.11be_160	6025	5.468	5.644	96.88	0.14	0.18	1.00
802.11be_320	6105	5.485	5.605	97.86	0.09	0.18	1.00

2X2							
Duty Cycle							
Mode	Frequency (MHz)	On time (ms)	On+off time (ms)	Duty cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11ax_20	5955	5.452	5.458	99.89	0.00	0.00	0.01
802.11ax_40	5965	5.462	5.638	96.88	0.14	0.18	1.00
802.11ax_80	5985	5.462	5.628	97.05	0.13	0.18	1.00
802.11ax_160	6025	5.462	5.638	96.88	0.14	0.18	1.00
802.11be_20	5955	5.458	5.464	99.89	0.00	0.00	0.01
802.11be_40	5965	5.468	5.654	96.71	0.15	0.18	1.00
802.11be_80	5985	5.468	5.654	96.71	0.15	0.18	1.00
802.11be_160	6025	5.468	5.644	96.88	0.14	0.18	1.00
802.11be_320	6105	5.485	5.605	97.86	0.09	0.18	1.00

Beamforming on							
Duty Cycle							
Mode	Frequency (MHz)	On time (ms)	On+off time (ms)	Duty cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11ax_20	5955	6.340	8.260	76.76	1.15	0.16	1.00
802.11ax_40	5965	3.480	5.080	68.50	1.64	0.29	1.00
802.11ax_80	5985	1.980	3.680	53.80	2.69	0.51	1.00
802.11ax_160	6025	1.280	3.200	40.00	3.98	0.78	1.00
802.11be_20	5955	6.420	8.920	71.97	1.43	0.16	1.00
802.11be_40	5965	3.420	5.020	68.13	1.67	0.29	1.00
802.11be_80	5985	1.840	3.700	49.73	3.03	0.54	1.00
802.11be_160	6025	1.140	3.180	35.85	4.46	0.88	1.00
802.11be_320	6105	0.980	2.960	33.11	4.80	1.02	2.00

■ **Test Graphs**
Reference Appendix B

5.3.2. Maximum Output Power Measurement

1X1

EIRP										
Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE20	1	5955	H	16.31	0.28	0.00	16.59	16.590	30.00	18
			V	9.69	0.39		10.08			
	45	6175	H	15.22	1.23	0.00	16.45	16.450	30.00	17.5
			V	6.71	1.37		8.08			
	93	6415	H	14.11	2.47	0.00	16.58	16.580	30.00	18.5
			V	8.61	2.63		11.24			
	97	6435	H	13.64	2.53	0.00	16.17	16.170	30.00	19
			V	9.62	2.68		12.30			
	105	6475	H	13.65	2.65	0.00	16.30	16.300	30.00	19
			V	9.90	2.78		12.68			
	113	6515	H	13.30	2.75	0.00	16.05	16.050	30.00	19
			V	10.20	2.88		13.08			
	117	6535	H	13.19	2.78	0.00	15.97	15.970	30.00	19
			V	10.02	2.92		12.94			
	149	6695	H	13.50	2.93	0.00	16.43	16.430	30.00	19.5
			V	10.60	2.88		13.48			
	181	6855	H	13.00	3.17	0.00	16.17	16.170	30.00	20.5
			V	11.57	3.27		14.84			
	185	6875	H	13.14	3.17	0.00	16.31	16.310	30.00	20.5
			V	12.03	3.21		15.24			
	189	6895	H	12.80	3.17	0.00	15.97	15.970	30.00	20
			V	11.63	3.14		14.77			
	209	6995	H	12.40	2.88	0.00	15.28	16.090	30.00	21.5
			V	12.79	3.30		16.09			
	229	7095	H	11.73	3.72	0.00	15.45	16.130	30.00	21
			V	12.26	3.87		16.13			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE40	3	5965	H	18.55	0.37	0.14	19.06	19.060	30.00	20.5
			V	10.99	0.46		11.59			
	43	6165	H	17.65	1.19	0.14	18.98	18.980	30.00	21
			V	9.98	1.33		11.45			
	91	6405	H	16.70	2.44	0.14	19.28	19.280	30.00	22.5
			V	12.37	2.60		15.11			
	99	6445	H	15.68	2.56	0.14	18.38	18.380	30.00	21.5
			V	11.62	2.71		14.47			
	107	6485	H	16.29	2.68	0.14	19.11	19.110	30.00	22
			V	12.52	2.81		15.47			
	115	6525	H	15.40	2.76	0.14	18.30	18.300	30.00	21.5
			V	12.41	2.90		15.45			
	123	6565	H	14.80	2.82	0.14	17.76	17.760	30.00	21.5
			V	11.70	2.98		14.82			
	147	6685	H	15.83	2.92	0.14	18.89	18.890	30.00	22
			V	12.86	2.90		15.90			
	179	6845	H	14.30	3.17	0.14	17.61	17.610	30.00	22
			V	12.33	3.30		15.77			
	187	6885	H	13.64	3.17	0.14	16.95	16.950	30.00	22
			V	12.69	3.18		16.01			
	195	6925	H	13.96	3.10	0.14	17.20	17.200	30.00	22.5
			V	13.28	3.17		16.59			
	211	7005	H	12.09	2.91	0.14	15.14	16.250	30.00	22
			V	12.77	3.34		16.25			
	227	7085	H	11.58	3.63	0.14	15.35	16.470	30.00	21
			V	12.52	3.81		16.47			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE80	7	5985	H	20.23	0.56	0.13	20.92	20.920	30.00	22
			V	12.44	0.62		13.19			
	39	6145	H	19.13	1.11	0.13	20.37	20.370	30.00	22
			V	9.99	1.26		11.38			
	87	6385	H	17.13	2.34	0.13	19.60	19.600	30.00	22.5
			V	11.65	2.53		14.31			
	103	6465	H	16.31	2.62	0.13	19.06	19.060	30.00	22
			V	11.80	2.76		14.69			
	119	6545	H	15.63	2.79	0.13	18.55	18.550	30.00	21.5
			V	12.28	2.94		15.35			
	135	6625	H	15.29	2.89	0.13	18.31	18.310	30.00	22
			V	12.51	3.01		15.65			
	151	6705	H	14.40	2.94	0.13	17.47	17.470	30.00	22.5
			V	12.67	2.90		15.70			
	167	6785	H	15.18	3.14	0.13	18.45	18.450	30.00	22.5
			V	12.06	3.36		15.55			
	183	6865	H	14.54	3.17	0.13	17.84	17.840	30.00	22.5
			V	13.14	3.24		16.51			
	199	6945	H	13.12	3.04	0.13	16.29	16.290	30.00	22
			V	12.69	3.21		16.03			
	215	7025	H	12.41	3.09	0.13	15.63	16.390	30.00	22
			V	12.80	3.46		16.39			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE160	15	6025	H	20.29	0.76	0.14	21.19	21.190	30.00	21.5
			V	12.15	0.82		13.11			
	47	6185	H	18.65	1.27	0.14	20.06	20.060	30.00	21.5
			V	9.75	1.41		11.30			
	79	6345	H	17.00	2.14	0.14	19.28	19.280	30.00	22
			V	11.14	2.36		13.64			
	111	6505	H	15.64	2.73	0.14	18.51	18.510	30.00	21
			V	11.93	2.86		14.93			
	143	6665	H	15.49	2.91	0.14	18.54	18.540	30.00	21.5
			V	12.42	2.93		15.49			
	175	6825	H	14.08	3.17	0.14	17.39	17.390	30.00	21.5
			V	11.73	3.37		15.24			
	207	6985	H	11.38	2.91	0.14	14.43	15.120	30.00	21
			V	11.70	3.28		15.12			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT20	1	5955	H	16.34	0.28	0.00	16.62	16.620	30.00	18
			V	9.74	0.39		10.13			
	45	6175	H	15.26	1.23	0.00	16.49	16.490	30.00	17.5
			V	6.75	1.37		8.12			
	93	6415	H	14.13	2.47	0.00	16.60	16.600	30.00	18.5
			V	8.64	2.63		11.27			
	97	6435	H	13.67	2.53	0.00	16.20	16.200	30.00	19
			V	9.65	2.68		12.33			
	105	6475	H	13.68	2.65	0.00	16.33	16.330	30.00	19
			V	9.93	2.78		12.71			
	113	6515	H	13.33	2.75	0.00	16.08	16.080	30.00	19
			V	10.23	2.88		13.11			
	117	6535	H	13.22	2.78	0.00	16.00	16.000	30.00	19
			V	10.05	2.92		12.97			
	149	6695	H	13.53	2.93	0.00	16.46	16.460	30.00	19.5
			V	10.63	2.88		13.51			
	181	6855	H	13.03	3.17	0.00	16.20	16.200	30.00	20.5
			V	11.60	3.27		14.87			
	185	6875	H	13.17	3.17	0.00	16.34	16.340	30.00	20.5
			V	12.06	3.21		15.27			
	189	6895	H	12.84	3.17	0.00	16.01	16.010	30.00	20
			V	11.66	3.14		14.80			
	209	6995	H	12.44	2.88	0.00	15.32	16.130	30.00	21.5
			V	12.83	3.30		16.13			
	229	7095	H	11.85	3.72	0.00	15.57	16.150	30.00	21
			V	12.28	3.87		16.15			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT40	3	5965	H	18.58	0.37	0.15	19.10	19.100	30.00	20.5
			V	11.03	0.46		11.64			
	43	6165	H	17.69	1.19	0.15	19.03	19.030	30.00	21
			V	10.02	1.33		11.50			
	91	6405	H	16.74	2.44	0.15	19.33	19.330	30.00	22.5
			V	12.40	2.60		15.15			
	99	6445	H	15.71	2.56	0.15	18.42	18.420	30.00	21.5
			V	11.65	2.71		14.51			
	107	6485	H	16.33	2.68	0.15	19.16	19.160	30.00	22
			V	12.55	2.81		15.51			
	115	6525	H	15.45	2.76	0.15	18.36	18.360	30.00	21.5
			V	12.46	2.90		15.51			
	123	6565	H	14.83	2.82	0.15	17.80	17.800	30.00	21.5
			V	11.74	2.98		14.87			
	147	6685	H	15.86	2.92	0.15	18.93	18.930	30.00	22
			V	12.89	2.90		15.94			
	179	6845	H	14.33	3.17	0.15	17.65	17.650	30.00	22
			V	12.36	3.30		15.81			
	187	6885	H	13.68	3.17	0.15	17.00	17.000	30.00	22
			V	12.72	3.18		16.05			
	195	6925	H	13.99	3.10	0.15	17.24	17.240	30.00	22.5
			V	13.31	3.17		16.63			
	211	7005	H	12.14	2.91	0.15	15.20	16.300	30.00	22
			V	12.81	3.34		16.30			
	227	7085	H	11.61	3.63	0.15	15.39	16.520	30.00	21
			V	12.56	3.81		16.52			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT80	7	5985	H	20.29	0.56	0.15	21.00	21.000	30.00	22
			V	12.51	0.62		13.28			
	39	6145	H	19.16	1.11	0.15	20.42	20.420	30.00	22
			V	10.03	1.26		11.44			
	87	6385	H	17.17	2.34	0.15	19.66	19.660	30.00	22.5
			V	11.68	2.53		14.36			
	103	6465	H	16.35	2.62	0.15	19.12	19.120	30.00	22
			V	11.84	2.76		14.75			
	119	6545	H	15.66	2.79	0.15	18.60	18.600	30.00	21.5
			V	12.31	2.94		15.40			
	135	6625	H	15.33	2.89	0.15	18.37	18.370	30.00	22
			V	12.54	3.01		15.70			
	151	6705	H	14.43	2.94	0.15	17.52	17.520	30.00	22.5
			V	12.73	2.90		15.78			
	167	6785	H	15.21	3.14	0.15	18.50	18.500	30.00	22.5
			V	12.09	3.36		15.60			
	183	6865	H	14.58	3.17	0.15	17.90	17.900	30.00	22.5
			V	13.18	3.24		16.57			
	199	6945	H	13.15	3.04	0.15	16.34	16.340	30.00	22
			V	12.72	3.21		16.08			
	215	7025	H	12.44	3.09	0.15	15.68	16.440	30.00	22
			V	12.83	3.46		16.44			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT160	15	6025	H	20.36	0.76	0.14	21.26	21.260	30.00	21.5
			V	12.18	0.82		13.14			
	47	6185	H	18.68	1.27	0.14	20.09	20.090	30.00	21.5
			V	9.78	1.41		11.33			
	79	6345	H	17.04	2.14	0.14	19.32	19.320	30.00	22
			V	11.18	2.36		13.68			
	111	6505	H	15.68	2.73	0.14	18.55	18.550	30.00	21
			V	11.97	2.86		14.97			
	143	6665	H	15.53	2.91	0.14	18.58	18.580	30.00	21.5
			V	12.46	2.93		15.53			
	175	6825	H	14.11	3.17	0.14	17.42	17.420	30.00	21.5
			V	11.76	3.37		15.27			
	207	6985	H	11.41	2.91	0.14	14.46	15.150	30.00	21
			V	11.73	3.28		15.15			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT320	31	6105	H	19.22	0.96	0.09	20.27	20.270	30.00	21
			V	10.45	1.11		11.65			
	63	6265	H	16.78	1.71	0.09	18.58	18.580	30.00	21
			V	9.89	1.92		11.90			
	95	6425	H	15.57	2.50	0.09	18.16	18.160	30.00	21
			V	10.34	2.65		13.08			
	127	6585	H	14.65	2.86	0.09	17.60	17.600	30.00	20.5
			V	11.61	3.02		14.72			
	159	6745	H	14.64	3.04	0.09	17.77	17.770	30.00	21
			V	11.61	3.13		14.83			
	191	6905	H	13.39	3.16	0.09	16.64	16.640	30.00	21
			V	12.22	3.14		15.45			

2X2

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE20	1	5955	H	13.00	0.28	0.00	13.28	13.280	30.00	12.5
			V	8.51	0.39		8.90			
	45	6175	H	12.58	1.23	0.00	13.81	13.810	30.00	12
			V	9.01	1.37		10.38			
	93	6415	H	11.27	2.47	0.00	13.74	13.740	30.00	14.5
			V	9.58	2.63		12.21			
	97	6435	H	10.82	2.53	0.00	13.35	13.350	30.00	13.5
			V	8.86	2.68		11.54			
	105	6475	H	10.86	2.65	0.00	13.51	13.510	30.00	13.5
			V	9.68	2.78		12.46			
	113	6515	H	10.76	2.75	0.00	13.51	13.510	30.00	13.5
			V	10.18	2.88		13.06			
	117	6535	H	10.60	2.78	0.00	13.38	13.380	30.00	13.5
			V	10.06	2.92		12.98			
	149	6695	H	11.01	2.93	0.00	13.94	13.940	30.00	14
			V	10.49	2.88		13.37			
	181	6855	H	10.41	3.17	0.00	13.58	13.580	30.00	15.5
			V	9.27	3.27		12.54			
	185	6875	H	10.17	3.17	0.00	13.34	13.340	30.00	15
			V	8.98	3.21		12.19			
	189	6895	H	10.50	3.17	0.00	13.67	13.670	30.00	15
			V	9.16	3.14		12.30			
	209	6995	H	11.57	2.88	0.00	14.45	14.450	30.00	17
			V	10.63	3.30		13.93			
	229	7095	H	10.33	3.72	0.00	14.05	14.050	30.00	16.5
			V	9.24	3.87		13.11			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE40	3	5965	H	15.91	0.37	0.14	16.42	16.420	30.00	15.5
			V	11.99	0.46		12.59			
	43	6165	H	15.25	1.19	0.14	16.58	16.580	30.00	14.5
			V	11.80	1.33		13.27			
	91	6405	H	13.97	2.44	0.14	16.55	16.550	30.00	17
			V	11.80	2.60		14.54			
	99	6445	H	14.25	2.56	0.14	16.95	16.950	30.00	17.5
			V	12.80	2.71		15.65			
	107	6485	H	14.03	2.68	0.14	16.85	16.850	30.00	16.5
			V	12.57	2.81		15.52			
	115	6525	H	13.97	2.76	0.14	16.87	16.870	30.00	17
			V	13.11	2.90		16.15			
	123	6565	H	13.72	2.82	0.14	16.68	16.680	30.00	17
			V	12.88	2.98		16.00			
	147	6685	H	13.95	2.92	0.14	17.01	17.010	30.00	17.5
			V	13.30	2.90		16.34			
	179	6845	H	13.47	3.17	0.14	16.78	16.780	30.00	18.5
			V	11.95	3.30		15.39			
	187	6885	H	13.51	3.17	0.14	16.82	16.820	30.00	18
			V	11.60	3.18		14.92			
	195	6925	H	13.41	3.10	0.14	16.65	16.650	30.00	18.5
			V	11.75	3.17		15.06			
	211	7005	H	13.59	2.91	0.14	16.64	16.640	30.00	19
			V	12.28	3.34		15.76			
	227	7085	H	12.81	3.63	0.14	16.58	16.580	30.00	19
			V	11.91	3.81		15.86			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE80	7	5985	H	18.84	0.56	0.13	19.53	19.530	30.00	18.5
			V	13.21	0.62		13.96			
	39	6145	H	17.84	1.11	0.13	19.08	19.080	30.00	17.5
			V	13.75	1.26		15.14			
	87	6385	H	16.72	2.34	0.13	19.19	19.190	30.00	19.5
			V	14.42	2.53		17.08			
	103	6465	H	16.92	2.62	0.13	19.67	19.670	30.00	20
			V	15.28	2.76		18.17			
	119	6545	H	17.13	2.79	0.13	20.05	20.050	30.00	19.5
			V	15.83	2.94		18.90			
	135	6625	H	16.68	2.89	0.13	19.70	19.700	30.00	20
			V	15.92	3.01		19.06			
	151	6705	H	17.06	2.94	0.13	20.13	20.130	30.00	20
			V	16.02	2.90		19.05			
	167	6785	H	16.32	3.14	0.13	19.59	19.590	30.00	20
			V	15.05	3.36		18.54			
	183	6865	H	16.73	3.17	0.13	20.03	20.030	30.00	21
			V	14.95	3.24		18.32			
	199	6945	H	16.13	3.04	0.13	19.30	19.300	30.00	21
			V	14.67	3.21		18.01			
	215	7025	H	15.25	3.09	0.13	18.47	18.470	30.00	21
			V	14.08	3.46		17.67			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE160	15	6025	H	21.20	0.76	0.14	22.10	22.100	30.00	20.5
			V	16.71	0.82		17.67			
	47	6185	H	20.60	1.27	0.14	22.01	22.010	30.00	20.5
			V	16.37	1.41		17.92			
	79	6345	H	20.00	2.14	0.14	22.28	22.280	30.00	22
			V	17.09	2.36		19.59			
	111	6505	H	18.89	2.73	0.14	21.76	21.760	30.00	21
			V	17.66	2.86		20.66			
	143	6665	H	19.23	2.91	0.14	22.28	22.280	30.00	21.5
			V	18.20	2.93		21.27			
	175	6825	H	17.53	3.17	0.14	20.84	20.840	30.00	21.5
			V	15.81	3.37		19.32			
	207	6985	H	15.35	2.91	0.14	18.40	18.400	30.00	20.5
			V	14.02	3.28		17.44			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT20	1	5955	H	13.03	0.28	0.00	13.31	13.310	30.00	12.5
			V	8.54	0.39		8.93			
	45	6175	H	12.61	1.23	0.00	13.84	13.840	30.00	12
			V	9.05	1.37		10.42			
	93	6415	H	11.31	2.47	0.00	13.78	13.780	30.00	14.5
			V	9.61	2.63		12.24			
	97	6435	H	10.86	2.53	0.00	13.39	13.390	30.00	13.5
			V	8.89	2.68		11.57			
	105	6475	H	10.88	2.65	0.00	13.53	13.530	30.00	13.5
			V	9.71	2.78		12.49			
	113	6515	H	10.78	2.75	0.00	13.53	13.530	30.00	13.5
			V	10.22	2.88		13.10			
	117	6535	H	10.62	2.78	0.00	13.40	13.400	30.00	13.5
			V	10.10	2.92		13.02			
	149	6695	H	11.06	2.93	0.00	13.99	13.990	30.00	14
			V	10.53	2.88		13.41			
	181	6855	H	10.44	3.17	0.00	13.61	13.610	30.00	15.5
			V	9.30	3.27		12.57			
	185	6875	H	10.20	3.17	0.00	13.37	13.370	30.00	15
			V	9.04	3.21		12.25			
	189	6895	H	10.56	3.17	0.00	13.73	13.730	30.00	15
			V	9.19	3.14		12.33			
	209	6995	H	11.60	2.88	0.00	14.48	14.480	30.00	17
			V	10.68	3.30		13.98			
	229	7095	H	10.41	3.72	0.00	14.13	14.130	30.00	16.5
			V	9.32	3.87		13.19			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT40	3	5965	H	15.93	0.37	0.15	16.45	16.450	30.00	15.5
			V	12.03	0.46		12.64			
	43	6165	H	15.32	1.19	0.15	16.66	16.660	30.00	14.5
			V	11.83	1.33		13.31			
	91	6405	H	14.01	2.44	0.15	16.60	16.600	30.00	17
			V	11.83	2.60		14.58			
	99	6445	H	14.30	2.56	0.15	17.01	17.010	30.00	17.5
			V	12.82	2.71		15.68			
	107	6485	H	14.06	2.68	0.15	16.89	16.890	30.00	16.5
			V	12.81	2.81		15.77			
	115	6525	H	14.03	2.76	0.15	16.94	16.940	30.00	17
			V	13.15	2.90		16.20			
	123	6565	H	13.76	2.82	0.15	16.73	16.730	30.00	17
			V	12.99	2.98		16.12			
	147	6685	H	14.04	2.92	0.15	17.11	17.110	30.00	17.5
			V	13.33	2.90		16.38			
	179	6845	H	13.49	3.17	0.15	16.81	16.810	30.00	18.5
			V	11.97	3.30		15.42			
	187	6885	H	13.58	3.17	0.15	16.90	16.900	30.00	18
			V	11.62	3.18		14.95			
	195	6925	H	13.44	3.10	0.15	16.69	16.690	30.00	18.5
			V	11.78	3.17		15.10			
	211	7005	H	13.69	2.91	0.15	16.75	16.750	30.00	19
			V	12.31	3.34		15.80			
	227	7085	H	12.84	3.63	0.15	16.62	16.620	30.00	19
			V	11.95	3.81		15.91			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT80	7	5985	H	18.90	0.56	0.15	19.61	19.610	30.00	18.5
			V	13.25	0.62		14.02			
	39	6145	H	17.89	1.11	0.15	19.15	19.150	30.00	17.5
			V	13.78	1.26		15.19			
	87	6385	H	16.75	2.34	0.15	19.24	19.240	30.00	19.5
			V	14.47	2.53		17.15			
	103	6465	H	16.98	2.62	0.15	19.75	19.750	30.00	20
			V	15.32	2.76		18.23			
	119	6545	H	17.17	2.79	0.15	20.11	20.110	30.00	19.5
			V	15.87	2.94		18.96			
	135	6625	H	16.73	2.89	0.15	19.77	19.770	30.00	20
			V	15.95	3.01		19.11			
	151	6705	H	17.09	2.94	0.15	20.18	20.180	30.00	20
			V	16.07	2.90		19.12			
	167	6785	H	16.35	3.14	0.15	19.64	19.640	30.00	20
			V	15.08	3.36		18.59			
	183	6865	H	16.76	3.17	0.15	20.08	20.080	30.00	21
			V	14.98	3.24		18.37			
	199	6945	H	16.16	3.04	0.15	19.35	19.350	30.00	21
			V	14.70	3.21		18.06			
	215	7025	H	15.28	3.09	0.15	18.52	18.520	30.00	21
			V	14.16	3.46		17.77			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT160	15	6025	H	21.24	0.76	0.14	22.14	22.140	30.00	20.5
			V	16.75	0.82		17.71			
	47	6185	H	20.63	1.27	0.14	22.04	22.040	30.00	20.5
			V	16.41	1.41		17.96			
	79	6345	H	20.04	2.14	0.14	22.32	22.320	30.00	22
			V	17.15	2.36		19.65			
	111	6505	H	18.93	2.73	0.14	21.80	21.800	30.00	21
			V	17.71	2.86		20.71			
	143	6665	H	19.28	2.91	0.14	22.33	22.330	30.00	21.5
			V	18.22	2.93		21.29			
	175	6825	H	17.63	3.17	0.14	20.94	20.940	30.00	21.5
			V	15.85	3.37		19.36			
	207	6985	H	15.39	2.91	0.14	18.44	18.440	30.00	20.5
			V	14.04	3.28		17.46			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT320	31	6105	H	21.93	0.96	0.09	22.98	22.980	30.00	21
			V	17.00	1.11		18.20			
	63	6265	H	20.05	1.71	0.09	21.85	21.850	30.00	21
			V	16.18	1.92		18.19			
	95	6425	H	17.77	2.50	0.09	20.36	20.360	30.00	20.5
			V	15.72	2.65		18.46			
	127	6585	H	17.44	2.86	0.09	20.39	20.390	30.00	20
			V	16.41	3.02		19.52			
	159	6745	H	17.21	3.04	0.09	20.34	20.340	30.00	20.5
			V	16.09	3.13		19.31			
	191	6905	H	15.54	3.16	0.09	18.79	18.790	30.00	20
			V	14.12	3.14		17.35			

Beamforming on

EIRP										
Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE20	1	5955	H	13.84	0.28	1.15	15.27	15.270	30.00	22
			V	10.41	0.39		11.95			
	45	6175	H	13.43	1.23	1.15	15.81	15.810	30.00	21
			V	10.28	1.37		12.80			
	93	6415	H	9.68	2.47	1.15	13.30	13.300	30.00	22
			V	6.80	2.63		10.58			
	97	6435	H	9.09	2.53	1.15	12.77	12.770	30.00	24
			V	7.10	2.68		10.93			
	105	6475	H	9.16	2.65	1.15	12.96	12.960	30.00	24
			V	7.85	2.78		11.78			
	113	6515	H	9.20	2.75	1.15	13.10	13.100	30.00	24
			V	8.58	2.88		12.61			
	117	6535	H	9.51	2.78	1.15	13.44	13.440	30.00	24
			V	8.76	2.92		12.83			
	149	6695	H	9.10	2.93	1.15	13.18	13.180	30.00	24
			V	8.62	2.88		12.65			
	181	6855	H	7.90	3.17	1.15	12.22	12.220	30.00	24
			V	7.30	3.27		11.72			
	185	6875	H	8.10	3.17	1.15	12.42	12.420	30.00	24
			V	7.70	3.21		12.06			
	189	6895	H	7.97	3.17	1.15	12.29	12.290	30.00	24
			V	7.69	3.14		11.98			
	209	6995	H	7.00	2.88	1.15	11.03	12.280	30.00	24
			V	7.83	3.30		12.28			
	229	7095	H	7.00	3.72	1.15	11.87	12.790	30.00	24
			V	7.77	3.87		12.79			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE40	3	5965	H	11.01	0.37	1.64	13.02	13.020	30.00	23
			V	8.70	0.46		10.80			
	43	6165	H	10.82	1.19	1.64	13.65	13.650	30.00	23
			V	6.81	1.33		9.78			
	91	6405	H	8.04	2.44	1.64	12.12	12.120	30.00	23
			V	6.09	2.60		10.33			
	99	6445	H	8.63	2.56	1.64	12.83	12.830	30.00	24
			V	5.88	2.71		10.23			
	107	6485	H	8.04	2.68	1.64	12.36	12.360	30.00	24
			V	7.65	2.81		12.10			
	115	6525	H	8.11	2.76	1.64	12.51	12.510	30.00	24
			V	7.14	2.90		11.68			
	123	6565	H	8.02	2.82	1.64	12.48	12.840	30.00	24
			V	8.22	2.98		12.84			
	147	6685	H	8.05	2.92	1.64	12.61	12.610	30.00	24
			V	7.53	2.90		12.07			
	179	6845	H	6.65	3.17	1.64	11.46	11.460	30.00	24
			V	5.58	3.30		10.52			
	187	6885	H	6.56	3.17	1.64	11.37	11.900	30.00	24
			V	7.08	3.18		11.90			
	195	6925	H	6.80	3.10	1.64	11.54	11.990	30.00	24
			V	7.18	3.17		11.99			
	211	7005	H	5.43	2.91	1.64	9.98	11.920	30.00	24
			V	6.94	3.34		11.92			
	227	7085	H	5.35	3.63	1.64	10.62	13.150	30.00	24
			V	7.70	3.81		13.15			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE80	7	5985	H	13.79	0.56	2.69	17.04	17.040	30.00	23
			V	10.48	0.62		13.79			
	39	6145	H	13.78	1.11	2.69	17.58	17.580	30.00	23
			V	10.42	1.26		14.37			
	87	6385	H	9.45	2.34	2.69	14.48	14.480	30.00	23
			V	6.72	2.53		11.94			
	103	6465	H	9.27	2.62	2.69	14.58	14.580	30.00	24
			V	8.52	2.76		13.97			
	119	6545	H	10.22	2.79	2.69	15.70	15.700	30.00	24
			V	9.01	2.94		14.64			
	135	6625	H	11.47	2.89	2.69	17.05	17.050	30.00	24
			V	8.88	3.01		14.58			
	151	6705	H	9.54	2.94	2.69	15.17	15.170	30.00	24
			V	9.10	2.90		14.69			
	167	6785	H	8.75	3.14	2.69	14.58	14.580	30.00	24
			V	7.49	3.36		13.54			
	183	6865	H	7.77	3.17	2.69	13.63	13.630	30.00	24
			V	7.02	3.24		12.95			
	199	6945	H	6.05	3.04	2.69	11.78	12.630	30.00	24
			V	6.73	3.21		12.63			
	215	7025	H	5.86	3.09	2.69	11.64	14.410	30.00	24
			V	8.26	3.46		14.41			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11ax HE160	15	6025	H	10.46	0.76	3.98	15.20	15.200	30.00	23
			V	8.45	0.82		13.25			
	47	6185	H	12.03	1.27	3.98	17.28	17.280	30.00	23
			V	8.26	1.41		13.65			
	79	6345	H	9.14	2.14	3.98	15.26	15.260	30.00	23
			V	7.02	2.36		13.36			
	111	6505	H	8.63	2.73	3.98	15.34	15.340	30.00	23
			V	6.13	2.86		12.97			
	143	6665	H	10.03	2.91	3.98	16.92	16.920	30.00	23
			V	6.18	2.93		13.09			
	175	6825	H	5.24	3.17	3.98	12.39	12.390	30.00	23
			V	4.53	3.37		11.88			
	207	6985	H	4.49	2.91	3.98	11.38	12.320	30.00	23
			V	5.06	3.28		12.32			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT20	1	5955	H	13.87	0.28	1.43	15.58	15.580	30.00	22
			V	10.47	0.39		12.29			
	45	6175	H	13.50	1.23	1.43	16.16	16.160	30.00	21
			V	10.33	1.37		13.13			
	93	6415	H	9.87	2.47	1.43	13.77	13.770	30.00	22
			V	6.86	2.63		10.92			
	97	6435	H	9.16	2.53	1.43	13.12	13.120	30.00	24
			V	7.22	2.68		11.33			
	105	6475	H	9.32	2.65	1.43	13.40	13.400	30.00	24
			V	7.93	2.78		12.14			
	113	6515	H	9.47	2.75	1.43	13.65	13.650	30.00	24
			V	8.67	2.88		12.98			
	117	6535	H	9.69	2.78	1.43	13.90	13.900	30.00	24
			V	8.78	2.92		13.13			
	149	6695	H	9.15	2.93	1.43	13.51	13.510	30.00	24
			V	8.68	2.88		12.99			
	181	6855	H	7.98	3.17	1.43	12.58	12.580	30.00	24
			V	7.37	3.27		12.07			
	185	6875	H	8.15	3.17	1.43	12.75	12.750	30.00	24
			V	7.79	3.21		12.43			
	189	6895	H	8.03	3.17	1.43	12.63	12.630	30.00	24
			V	7.74	3.14		12.31			
	209	6995	H	7.06	2.88	1.43	11.37	12.590	30.00	24
			V	7.86	3.30		12.59			
	229	7095	H	7.05	3.72	1.43	12.20	13.110	30.00	24
			V	7.81	3.87		13.11			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT40	3	5965	H	11.06	0.37	1.67	13.10	13.100	30.00	23
			V	8.73	0.46		10.86			
	43	6165	H	10.85	1.19	1.67	13.71	13.710	30.00	23
			V	6.89	1.33		9.89			
	91	6405	H	8.07	2.44	1.67	12.18	12.180	30.00	23
			V	6.11	2.60		10.38			
	99	6445	H	8.69	2.56	1.67	12.92	12.920	30.00	24
			V	5.92	2.71		10.30			
	107	6485	H	8.09	2.68	1.67	12.44	12.440	30.00	24
			V	7.78	2.81		12.26			
	115	6525	H	8.19	2.76	1.67	12.62	12.620	30.00	24
			V	7.21	2.90		11.78			
	123	6565	H	8.08	2.82	1.67	12.57	12.900	30.00	24
			V	8.25	2.98		12.90			
	147	6685	H	8.08	2.92	1.67	12.67	12.670	30.00	24
			V	7.65	2.90		12.22			
	179	6845	H	6.68	3.17	1.67	11.52	11.520	30.00	24
			V	5.65	3.30		10.62			
	187	6885	H	6.66	3.17	1.67	11.50	11.960	30.00	24
			V	7.11	3.18		11.96			
	195	6925	H	6.88	3.10	1.67	11.65	12.050	30.00	24
			V	7.21	3.17		12.05			
	211	7005	H	5.48	2.91	1.67	10.06	12.010	30.00	24
			V	7.00	3.34		12.01			
	227	7085	H	5.41	3.63	1.67	10.71	13.220	30.00	24
			V	7.74	3.81		13.22			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT80	7	5985	H	13.89	0.56	3.03	17.48	17.480	30.00	23
			V	10.54	0.62		14.19			
	39	6145	H	13.83	1.11	3.03	17.97	17.970	30.00	23
			V	10.48	1.26		14.77			
	87	6385	H	9.50	2.34	3.03	14.87	14.870	30.00	23
			V	6.80	2.53		12.36			
	103	6465	H	9.31	2.62	3.03	14.96	14.960	30.00	24
			V	8.59	2.76		14.38			
	119	6545	H	10.25	2.79	3.03	16.07	16.070	30.00	24
			V	9.04	2.94		15.01			
	135	6625	H	11.50	2.89	3.03	17.42	17.420	30.00	24
			V	8.96	3.01		15.00			
	151	6705	H	9.57	2.94	3.03	15.54	15.540	30.00	24
			V	9.19	2.90		15.12			
	167	6785	H	8.78	3.14	3.03	14.95	14.950	30.00	24
			V	7.54	3.36		13.93			
	183	6865	H	7.83	3.17	3.03	14.03	14.030	30.00	24
			V	7.05	3.24		13.32			
	199	6945	H	6.12	3.04	3.03	12.19	13.010	30.00	24
			V	6.77	3.21		13.01			
	215	7025	H	5.97	3.09	3.03	12.09	14.830	30.00	24
			V	8.34	3.46		14.83			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT160	15	6025	H	10.46	0.76	4.46	15.68	15.680	30.00	23
			V	8.63	0.82		13.91			
	47	6185	H	12.13	1.27	4.46	17.86	17.860	30.00	23
			V	8.47	1.41		14.34			
	79	6345	H	9.40	2.14	4.46	16.00	16.000	30.00	23
			V	7.10	2.36		13.92			
	111	6505	H	8.72	2.73	4.46	15.91	15.910	30.00	23
			V	6.29	2.86		13.61			
	143	6665	H	10.23	2.91	4.46	17.60	17.600	30.00	23
			V	6.37	2.93		13.76			
	175	6825	H	5.34	3.17	4.46	12.97	12.970	30.00	23
			V	4.60	3.37		12.43			
	207	6985	H	4.70	2.91	4.46	12.07	12.930	30.00	23
			V	5.19	3.28		12.93			

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP(dBm)	Max. EIRP(dBm)	Limit	Setting
11be_EHT320	31	6105	H	9.74	0.96	4.80	15.50	15.500	30.00	19
			V	8.83	1.11		14.74			
	63	6265	H	11.35	1.71	4.80	17.86	17.860	30.00	20
			V	4.67	1.92		11.39			
	95	6425	H	8.52	2.50	4.80	15.82	15.820	30.00	19
			V	5.50	2.65		12.95			
	127	6585	H	6.79	2.86	4.80	14.45	14.630	30.00	18
			V	6.81	3.02		14.63			
	159	6745	H	6.14	3.04	4.80	13.98	13.980	30.00	19
			V	5.16	3.13		13.09			
	191	6905	H	5.14	3.16	4.80	13.10	13.100	30.00	19
			V	3.92	3.14		11.86			

5.3.3. Maximum Power Spectral Density Measurement

1X1

EIRP PSD										
Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT20	1	5955	H	4.600	0.28	0.00	4.880	4.880	5.00	18
			V	-1.615	0.39		-1.225			
	45	6175	H	3.683	1.23	0.00	4.913	4.913	5.00	17.5
			V	-4.632	1.37		-3.262			
	93	6415	H	1.967	2.47	0.00	4.437	4.437	5.00	18.5
			V	-2.712	2.63		-0.082			
	97	6435	H	2.338	2.53	0.00	4.868	4.868	5.00	19
			V	-1.920	2.68		0.760			
	105	6475	H	2.322	2.65	0.00	4.972	4.972	5.00	19
			V	-1.561	2.78		1.219			
	113	6515	H	1.895	2.75	0.00	4.645	4.645	5.00	19
			V	-1.502	2.88		1.378			
	117	6535	H	1.800	2.78	0.00	4.580	4.580	5.00	19
			V	-1.394	2.92		1.526			
	149	6695	H	1.912	2.93	0.00	4.842	4.842	5.00	19.5
			V	-0.848	2.88		2.032			
	181	6855	H	1.551	3.17	0.00	4.721	4.721	5.00	20.5
			V	-0.021	3.27		3.249			
	185	6875	H	1.774	3.17	0.00	4.944	4.944	5.00	20.5
			V	0.473	3.21		3.683			
	189	6895	H	1.823	3.17	0.00	4.993	4.993	5.00	20
			V	0.050	3.14		3.190			
	209	6995	H	1.102	2.88	0.00	3.982	4.924	5.00	21.5
			V	1.624	3.30		4.924			
	229	7095	H	0.439	3.72	0.00	4.159	4.862	5.00	21
			V	0.992	3.87		4.862			

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT40	3	5965	H	3.999	0.37	0.15	4.519	4.519	5.00	20.5
			V	-3.384	0.46		-2.774			
	43	6165	H	3.491	1.19	0.15	4.831	4.831	5.00	21
			V	-4.318	1.33		-2.838			
	91	6405	H	2.145	2.44	0.15	4.735	4.735	5.00	22.5
			V	-2.023	2.60		0.727			
	99	6445	H	1.299	2.56	0.15	4.009	4.009	5.00	21.5
			V	-2.978	2.71		-0.118			
	107	6485	H	1.763	2.68	0.15	4.593	4.593	5.00	22
			V	-1.747	2.81		1.213			
	115	6525	H	0.880	2.76	0.15	3.790	3.790	5.00	21.5
			V	-2.145	2.90		0.905			
	123	6565	H	0.393	2.82	0.15	3.363	3.363	5.00	21.5
			V	-2.547	2.98		0.583			
	147	6685	H	1.351	2.92	0.15	4.421	4.421	5.00	22
			V	-1.370	2.90		1.680			
	179	6845	H	-0.392	3.17	0.15	2.928	2.928	5.00	22
			V	-2.040	3.30		1.410			
	187	6885	H	-0.348	3.17	0.15	2.972	2.972	5.00	22
			V	-1.826	3.18		1.504			
	195	6925	H	-0.193	3.10	0.15	3.057	3.057	5.00	22.5
			V	-0.954	3.17		2.366			
	211	7005	H	-2.096	2.91	0.15	0.964	1.981	5.00	22
			V	-1.509	3.34		1.981			
	227	7085	H	-2.683	3.63	0.15	1.097	2.118	5.00	21
			V	-1.842	3.81		2.118			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT80	7	5985	H	3.244	0.56	0.15	3.954	3.954	5.00	22
			V	-5.345	0.62		-4.575			
	39	6145	H	2.838	1.11	0.15	4.098	4.098	5.00	22
			V	-6.016	1.26		-4.606			
	87	6385	H	-0.457	2.34	0.15	2.033	2.033	5.00	22.5
			V	-5.662	2.53		-2.982			
	103	6465	H	-0.995	2.62	0.15	1.775	1.775	5.00	22
			V	-5.727	2.76		-2.817			
	119	6545	H	-1.738	2.79	0.15	1.202	1.202	5.00	21.5
			V	-5.245	2.94		-2.155			
	135	6625	H	-2.265	2.89	0.15	0.775	0.775	5.00	22
			V	-4.738	3.01		-1.578			
	151	6705	H	-2.625	2.94	0.15	0.465	0.465	5.00	22.5
			V	-4.368	2.90		-1.318			
	167	6785	H	-1.804	3.14	0.15	1.486	1.486	5.00	22.5
			V	-4.529	3.36		-1.019			
	183	6865	H	-2.579	3.17	0.15	0.741	0.741	5.00	22.5
			V	-4.323	3.24		-0.933			
	199	6945	H	-3.522	3.04	0.15	-0.332	-0.332	5.00	22
			V	-4.269	3.21		-0.909			
	215	7025	H	-4.399	3.09	0.15	-1.159	-0.803	5.00	22
			V	-4.413	3.46		-0.803			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT160	15	6025	H	0.330	0.76	0.14	1.230	1.230	5.00	21.5
			V	-8.039	0.82		-7.079			
	47	6185	H	-0.788	1.27	0.14	0.622	0.622	5.00	21.5
			V	-9.225	1.41		-7.675			
	79	6345	H	-3.071	2.14	0.14	-0.791	-0.791	5.00	22
			V	-9.009	2.36		-6.509			
	111	6505	H	-4.010	2.73	0.14	-1.140	-1.140	5.00	21
			V	-8.481	2.86		-5.481			
	143	6665	H	-4.937	2.91	0.14	-1.887	-1.887	5.00	21.5
			V	-7.785	2.93		-4.715			
	175	6825	H	-5.406	3.17	0.14	-2.096	-2.096	5.00	21.5
			V	-8.264	3.37		-4.754			
	207	6985	H	-7.346	2.91	0.14	-4.296	-4.296	5.00	21
			V	-7.894	3.28		-4.474			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT320	31	6105	H	-2.462	0.96	0.09	-1.412	-1.412	5.00	21
			V	-11.510	1.11		-10.310			
	63	6265	H	-4.657	1.71	0.09	-2.857	-2.857	5.00	21
			V	-12.994	1.92		-10.984			
	95	6425	H	-7.179	2.50	0.09	-4.589	-4.589	5.00	21
			V	-12.623	2.65		-9.883			
	127	6585	H	-8.139	2.86	0.09	-5.189	-5.189	5.00	20.5
			V	-11.692	3.02		-8.582			
	159	6745	H	-8.234	3.04	0.09	-5.104	-5.104	5.00	21
			V	-10.644	3.13		-7.424			
	191	6905	H	-8.369	3.16	0.09	-5.119	-5.119	5.00	21
			V	-11.147	3.14		-7.917			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

2X2

PSD										
Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT20	1	5955	H	4.285	0.28	0.00	4.565	4.565	5.00	12.5
			V	-0.540	0.39		-0.150			
	45	6175	H	3.623	1.23	0.00	4.853	4.853	5.00	12
			V	-1.193	1.37		0.177			
	93	6415	H	2.455	2.47	0.00	4.925	4.925	5.00	14.5
			V	-0.317	2.63		2.313			
	97	6435	H	2.148	2.53	0.00	4.678	4.678	5.00	13.5
			V	0.128	2.68		2.808			
	105	6475	H	1.967	2.65	0.00	4.617	4.617	5.00	13.5
			V	-0.085	2.78		2.695			
	113	6515	H	1.955	2.75	0.00	4.705	4.705	5.00	13.5
			V	0.552	2.88		3.432			
	117	6535	H	2.015	2.78	0.00	4.795	4.795	5.00	13.5
			V	0.232	2.92		3.152			
	149	6695	H	1.667	2.93	0.00	4.597	4.597	5.00	14
			V	0.803	2.88		3.683			
	181	6855	H	1.605	3.17	0.00	4.775	4.775	5.00	15.5
			V	0.029	3.27		3.299			
	185	6875	H	1.452	3.17	0.00	4.622	4.622	5.00	15
			V	0.089	3.21		3.299			
	189	6895	H	1.649	3.17	0.00	4.819	4.819	5.00	15
			V	-0.021	3.14		3.119			
	209	6995	H	2.086	2.88	0.00	4.966	4.966	5.00	17
			V	1.339	3.30		4.639			
	229	7095	H	1.249	3.72	0.00	4.969	4.969	5.00	16.5
			V	0.434	3.87		4.304			

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT40	3	5965	H	4.215	0.37	0.15	4.735	4.735	5.00	15.5
			V	-0.807	0.46		-0.197			
	43	6165	H	3.547	1.19	0.15	4.887	4.887	5.00	14.5
			V	-0.946	1.33		0.534			
	91	6405	H	2.158	2.44	0.15	4.748	4.748	5.00	17
			V	-0.454	2.60		2.296			
	99	6445	H	2.232	2.56	0.15	4.942	4.942	5.00	17.5
			V	1.006	2.71		3.866			
	107	6485	H	1.946	2.68	0.15	4.776	4.776	5.00	16.5
			V	0.831	2.81		3.791			
	115	6525	H	2.028	2.76	0.15	4.938	4.938	5.00	17
			V	1.238	2.90		4.288			
	123	6565	H	1.732	2.82	0.15	4.702	4.702	5.00	17
			V	0.871	2.98		4.001			
	147	6685	H	1.869	2.92	0.15	4.939	4.939	5.00	17.5
			V	1.531	2.90		4.581			
	179	6845	H	1.412	3.17	0.15	4.732	4.732	5.00	18.5
			V	0.286	3.30		3.736			
	187	6885	H	1.452	3.17	0.15	4.772	4.772	5.00	18
			V	-0.100	3.18		3.230			
	195	6925	H	1.505	3.10	0.15	4.755	4.755	5.00	18.5
			V	-0.470	3.17		2.850			
	211	7005	H	1.732	2.91	0.15	4.792	4.792	5.00	19
			V	0.651	3.34		4.141			
	227	7085	H	0.874	3.63	0.15	4.654	4.654	5.00	19
			V	0.187	3.81		4.147			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT80	7	5985	H	4.059	0.56	0.15	4.769	4.769	5.00	18.5
			V	-1.812	0.62		-1.042			
	39	6145	H	3.352	1.11	0.15	4.612	4.612	5.00	17.5
			V	-1.849	1.26		-0.439			
	87	6385	H	2.012	2.34	0.15	4.502	4.502	5.00	19.5
			V	-0.340	2.53		2.340			
	103	6465	H	2.084	2.62	0.15	4.854	4.854	5.00	20
			V	0.242	2.76		3.152			
	119	6545	H	1.735	2.79	0.15	4.675	4.675	5.00	19.5
			V	0.912	2.94		4.002			
	135	6625	H	1.861	2.89	0.15	4.901	4.901	5.00	20
			V	0.915	3.01		4.075			
	151	6705	H	1.813	2.94	0.15	4.903	4.903	5.00	20
			V	1.372	2.90		4.422			
	167	6785	H	1.414	3.14	0.15	4.704	4.704	5.00	20
			V	0.663	3.36		4.173			
	183	6865	H	1.640	3.17	0.15	4.960	4.960	5.00	21
			V	0.692	3.24		4.082			
	199	6945	H	1.731	3.04	0.15	4.921	4.921	5.00	21
			V	-0.259	3.21		3.101			
	215	7025	H	0.325	3.09	0.15	3.565	3.878	5.00	21
			V	0.268	3.46		3.878			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT160	15	6025	H	3.965	0.76	0.14	4.865	4.865	5.00	20.5
			V	-1.990	0.82		-1.030			
	47	6185	H	3.407	1.27	0.14	4.817	4.817	5.00	20.5
			V	-1.885	1.41		-0.335			
	79	6345	H	2.244	2.14	0.14	4.524	4.524	5.00	22
			V	-0.671	2.36		1.829			
	111	6505	H	1.286	2.73	0.14	4.156	4.156	5.00	21
			V	0.300	2.86		3.300			
	143	6665	H	1.095	2.91	0.14	4.145	4.145	5.00	21.5
			V	0.785	2.93		3.855			
	175	6825	H	0.134	3.17	0.14	3.444	3.444	5.00	21.5
			V	-1.624	3.37		1.886			
	207	6985	H	-1.670	2.91	0.14	1.380	1.380	5.00	20.5
			V	-3.107	3.28		0.313			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT320	31	6105	H	2.060	0.96	0.09	3.110	3.110	5.00	21
			V	-4.007	1.11		-2.807			
	63	6265	H	0.950	1.71	0.09	2.750	2.750	5.00	21
			V	-4.646	1.92		-2.636			
	95	6425	H	-2.609	2.50	0.09	-0.019	-0.019	5.00	20.5
			V	-4.929	2.65		-2.189			
	127	6585	H	-2.948	2.86	0.09	0.002	0.002	5.00	20
			V	-4.074	3.02		-0.964			
	159	6745	H	-3.087	3.04	0.09	0.043	0.043	5.00	20.5
			V	-4.010	3.13		-0.790			
	191	6905	H	-4.149	3.16	0.09	-0.899	-0.899	5.00	20
			V	-5.955	3.14		-2.725			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Beamforming on

EIRP PSD										
Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT20	1	5955	H	2.572	0.28	1.43	4.282	4.282	5.00	22
			V	-0.651	0.39		1.169			
	45	6175	H	2.175	1.23	1.43	4.835	4.835	5.00	21
			V	-1.300	1.37		1.500			
	93	6415	H	-1.689	2.47	1.43	2.211	2.211	5.00	22
			V	-4.192	2.63		-0.132			
	97	6435	H	-2.403	2.53	1.43	1.557	1.557	5.00	24
			V	-3.658	2.68		0.452			
	105	6475	H	-2.729	2.65	1.43	1.351	1.351	5.00	24
			V	-3.857	2.78		0.353			
	113	6515	H	-1.742	2.75	1.43	2.438	2.438	5.00	24
			V	-2.599	2.88		1.711			
	117	6535	H	-2.335	2.78	1.43	1.875	2.047	5.00	24
			V	-2.303	2.92		2.047			
	149	6695	H	-1.664	2.93	1.43	2.696	2.696	5.00	24
			V	-2.268	2.88		2.042			
	181	6855	H	-3.175	3.17	1.43	1.425	1.425	5.00	24
			V	-3.793	3.27		0.907			
	185	6875	H	-3.047	3.17	1.43	1.553	1.553	5.00	24
			V	-3.217	3.21		1.423			
	189	6895	H	-3.255	3.17	1.43	1.345	1.345	5.00	24
			V	-3.348	3.14		1.222			
	209	6995	H	-3.869	2.88	1.43	0.441	0.878	5.00	24
			V	-3.852	3.30		0.878			
	229	7095	H	-4.196	3.72	1.43	0.954	1.967	5.00	24
			V	-3.333	3.87		1.967			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT40	3	5965	H	-2.139	0.37	1.67	-0.099	-0.099	5.00	23
			V	-5.547	0.46		-3.417			
	43	6165	H	-2.269	1.19	1.67	0.591	0.591	5.00	23
			V	-6.649	1.33		-3.649			
	91	6405	H	-5.148	2.44	1.67	-1.038	-1.038	5.00	23
			V	-7.741	2.60		-3.471			
	99	6445	H	-5.321	2.56	1.67	-1.091	-1.091	5.00	24
			V	-7.726	2.71		-3.346			
	107	6485	H	-5.123	2.68	1.67	-0.773	-0.773	5.00	24
			V	-6.136	2.81		-1.656			
	115	6525	H	-5.197	2.76	1.67	-0.767	-0.767	5.00	24
			V	-6.235	2.90		-1.665			
	123	6565	H	-5.044	2.82	1.67	-0.554	-0.554	5.00	24
			V	-5.354	2.98		-0.704			
	147	6685	H	-5.541	2.92	1.67	-0.951	-0.951	5.00	24
			V	-6.645	2.90		-2.075			
	179	6845	H	-7.150	3.17	1.67	-2.310	-2.310	5.00	24
			V	-7.519	3.30		-2.549			
	187	6885	H	-6.838	3.17	1.67	-1.998	-1.998	5.00	24
			V	-7.254	3.18		-2.404			
	195	6925	H	-7.181	3.10	1.67	-2.411	-2.086	5.00	24
			V	-6.926	3.17		-2.086			
	211	7005	H	-7.537	2.91	1.67	-2.957	-2.168	5.00	24
			V	-7.178	3.34		-2.168			
	227	7085	H	-8.435	3.63	1.67	-3.135	-0.749	5.00	24
			V	-6.229	3.81		-0.749			

Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT80	7	5985	H	-2.339	0.56	3.03	1.251	1.251	5.00	23
			V	-6.680	0.62		-3.030			
	39	6145	H	-2.576	1.11	3.03	1.564	1.564	5.00	23
			V	-5.909	1.26		-1.619			
	87	6385	H	-6.770	2.34	3.03	-1.400	-1.400	5.00	23
			V	-10.014	2.53		-4.454			
	103	6465	H	-7.379	2.62	3.03	-1.729	-1.729	5.00	24
			V	-8.789	2.76		-2.999			
	119	6545	H	-6.044	2.79	3.03	-0.224	-0.224	5.00	24
			V	-8.184	2.94		-2.214			
	135	6625	H	-5.290	2.89	3.03	0.630	0.630	5.00	24
			V	-7.220	3.01		-1.180			
	151	6705	H	-7.036	2.94	3.03	-1.066	-1.066	5.00	24
			V	-7.817	2.90		-1.887			
	167	6785	H	-7.863	3.14	3.03	-1.693	-1.693	5.00	24
			V	-8.575	3.36		-2.185			
	183	6865	H	-8.968	3.17	3.03	-2.768	-2.768	5.00	24
			V	-9.854	3.24		-3.584			
	199	6945	H	-9.536	3.04	3.03	-3.466	-3.336	5.00	24
			V	-9.576	3.21		-3.336			
	215	7025	H	-10.956	3.09	3.03	-4.836	-2.206	5.00	24
			V	-8.696	3.46		-2.206			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT160	15	6025	H	-8.258	0.76	4.46	-3.038	-3.038	5.00	23
			V	-11.151	0.82		-5.871			
	47	6185	H	-7.343	1.27	4.46	-1.613	-1.613	5.00	23
			V	-12.474	1.41		-6.604			
	79	6345	H	-9.881	2.14	4.46	-3.281	-3.281	5.00	23
			V	-14.077	2.36		-7.257			
	111	6505	H	-9.501	2.73	4.46	-2.311	-2.311	5.00	23
			V	-12.660	2.86		-5.340			
	143	6665	H	-12.872	2.91	4.46	-5.502	-5.245	5.00	23
			V	-12.635	2.93		-5.245			
	175	6825	H	-12.768	3.17	4.46	-5.138	-5.138	5.00	23
			V	-13.446	3.37		-5.616			
	207	6985	H	-14.171	2.91	4.46	-6.801	-6.801	5.00	23
			V	-14.930	3.28		-7.190			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

Mode	Channel	Frequency (MHz)	Polarization (H/V)	Reading (dBm)	Correction Factor(dB)	Duty Factor (dB)	EIRP PSD (dBm/MHz)	Max. EIRP PSD (dBm/MHz)	Limit	Setting
11be_EHT320	31	6105	H	-8.940	0.96	4.80	-3.180	-3.180	5.00	19
			V	-12.890	1.11		-6.980			
	63	6265	H	-10.324	1.71	4.80	-3.814	-3.814	5.00	20
			V	-14.356	1.92		-7.636			
	95	6425	H	-12.895	2.50	4.80	-5.595	-5.595	5.00	19
			V	-15.823	2.65		-8.373			
	127	6585	H	-14.236	2.86	4.80	-6.576	-6.576	5.00	18
			V	-16.374	3.02		-8.554			
	159	6745	H	-15.733	3.04	4.80	-7.893	-7.893	5.00	19
			V	-16.184	3.13		-8.254			
	191	6905	H	-15.669	3.16	4.80	-7.709	-7.709	5.00	19
			V	-17.133	3.14		-9.193			
Note: EIRP PSD (dBm) = Reading (dBm) + Correction Factor(dB) + Duty Factor(dB)										

■ **Test Graphs**
Reference Appendix B

5.3.4. Emission Bandwidth Measurement

Reference Appendix A

5.3.5. In-Band Emission (Mask) Measurement

Reference Appendix A

5.3.6. Contention Based Protocol Measurement

Contention Based Protocol							
Band	Bandwidth (MHz)	AWGN Freq. (MHz)	Number of Times	Number of Detection	AWGN Detection Probability (%)	Limit Probability (%)	Result
U-NII-5	20	6135	10	10	100	90	PASS
	320	5950	10	10	100	90	PASS
		6105	10	10	100	90	PASS
		6260	10	10	100	90	PASS
U-NII-6	20	6455	10	10	100	90	PASS
	320	6430	10	10	100	90	PASS
		6585	10	10	100	90	PASS
		6740	10	10	100	90	PASS
U-NII-7	20	6695	10	10	100	90	PASS
	320	6750	10	10	100	90	PASS
		6905	10	10	100	90	PASS
		7060	10	10	100	90	PASS
U-NII-8	20	7015	10	10	100	90	PASS
	320	6750	10	10	100	90	PASS
		6905	10	10	100	90	PASS
		7060	10	10	100	90	PASS

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Contention Based Protocol Threshold Level Verify									
Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-5	20	37	6135	6135	-57.8	4.20	-62.00	-62.00	OFF
					-64.8	4.20	-69.00	-62.00	Minimal
					-71.8	4.20	-76.00	-62.00	ON
	320	31	6105	5950	-57.8	4.20	-62.00	-62.00	OFF
					-67.8	4.20	-72.00	-62.00	Minimal
					-70.8	4.20	-75.00	-62.00	ON
				6105	-57.8	4.20	-62.00	-62.00	OFF
					-68.8	4.20	-73.00	-62.00	Minimal
					-71.8	4.20	-76.00	-62.00	ON
				6260	-57.8	4.20	-62.00	-62.00	OFF
					-74.8	4.20	-79.00	-62.00	Minimal
					-76.8	4.20	-81.00	-62.00	ON
U-NII-6	20	101	6455	6455	-57.2	4.80	-62.00	-62.00	OFF
					-64.2	4.80	-69.00	-62.00	Minimal
					-72.2	4.80	-77.00	-62.00	ON
	320	127	6585	6430	-57.2	4.80	-62.00	-62.00	OFF
					-63.2	4.80	-68.00	-62.00	Minimal
					-68.2	4.80	-73.00	-62.00	ON
				6585	-57.2	4.80	-62.00	-62.00	OFF
					-61.2	4.80	-66.00	-62.00	Minimal
					-67.2	4.80	-72.00	-62.00	ON
				6740	-57.2	4.80	-62.00	-62.00	OFF
					-70.2	4.80	-75.00	-62.00	Minimal
					-73.2	4.80	-78.00	-62.00	ON
U-NII-7	20	149	6695	6695	-57.1	4.90	-62.00	-62.00	OFF
					-62.1	4.90	-67.00	-62.00	Minimal
					-69.1	4.90	-74.00	-62.00	ON
	320	191	6905	6750	-59.1	2.90	-62.00	-62.00	OFF
					-73.1	2.90	-76.00	-62.00	Minimal
					-76.1	2.90	-79.00	-62.00	ON
				6905	-59.1	2.90	-62.00	-62.00	OFF
					-61.1	2.90	-64.00	-62.00	Minimal
					-69.1	2.90	-72.00	-62.00	ON
				7060	-59.1	2.90	-62.00	-62.00	OFF
					-72.1	2.90	-75.00	-62.00	Minimal
					-74.1	2.90	-77.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

Contention Based Protocol Threshold Level Verify									
Band	Bandwidth (MHz)	Channel	Frequency (MHz)	Injected signal (AWGN)		Antenna Gain (dBi)	Adjusted Power (dBm)	Detection Level	EUT Tx Status
				Freq. (MHz)	Power (dBm)				
U-NII-8	20	213	7015	7015	-59.1	2.90	-62.00	-62.00	OFF
					-63.1	2.90	-66.00	-62.00	Minimal
					-70.1	2.90	-73.00	-62.00	ON
	320	191	6905	6750	ss	2.90	-62.00	-62.00	OFF
					-73.1	2.90	-76.00	-62.00	Minimal
					-76.1	2.90	-79.00	-62.00	ON
				6905	-59.1	2.90	-62.00	-62.00	OFF
					-61.1	2.90	-64.00	-62.00	Minimal
					-69.1	2.90	-72.00	-62.00	ON
				7060	-59.1	2.90	-62.00	-62.00	OFF
					-72.1	2.90	-75.00	-62.00	Minimal
					-74.1	2.90	-77.00	-62.00	ON

Note 1 : Adjusted power = Injected (AWGN) power (dBm) – Antenna Gain (dBi).

Note 2 : Injected (AWGN) power Include Path Loss.

■ Test Graphs**Threshold level of AWGN interference Plot**

Reference Appendix B

Contention Based Protocol Plot

Reference Appendix B

Contention Based Protocol Threshold Level Verify

Reference Appendix B

--- END---