

2BH5BKRF-WIN-SENSOR


About WINDOW SENSOR:

When the smart window sensor detects that the window is opened, the thermostat will automatically adjust the air conditioner to air supply mode to avoid wasting energy.


This wireless alarm is of high quality and small size, suitable for most doors and windows (sliding/crank/hanging...doors and windows), cabinets and drawers...

EASY TO INSTALL: Simply peel and stick the sensor to any window or glass, double sided tape included! No wiring required! No screws required!

Insert a flat-blade screwdriver into the groove, open the machine, and replace the battery.

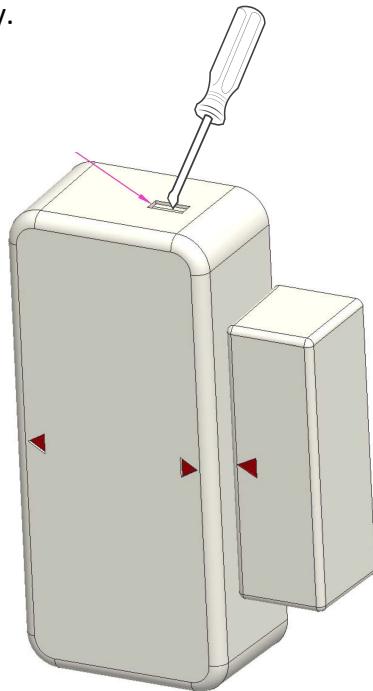

Press and hold "RF Connect" for 5 seconds to enter pairing mode.

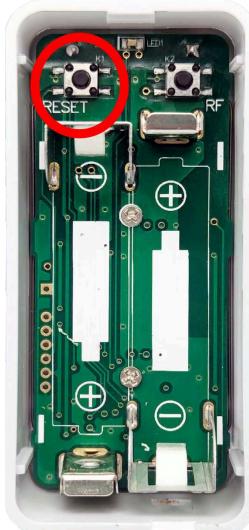

Warning:

1. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.
2. To comply with FCC RF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.
3. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
4. This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- Specifications:
- Power: two AA batteries
- Operating frequency: 915 MHz
- Working distance up to: 30 m.