

FCC TEST REPORT

FCC ID:2BH5M-HCS-P1

Product : SmartWatch
Model Name : HCS-P1
Brand : /
Report No. : NCT24029473E

Prepared for

Shenzhen Hechuang Shun Technology Co., Ltd
103, No. 8, Underground Second Lane, Anliang Community, Yuanshan Street,
Longgang District, Shenzhen

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.
A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Hechuang Shun Technology Co., Ltd
Address : 103, No. 8, Underground Second Lane, Anliang Community,
Yuanshan Street, Longgang District, Shenzhen
Manufacture's name : Shenzhen Hechuang Shun Technology Co., Ltd
Address : 103, No. 8, Underground Second Lane, Anliang Community,
Yuanshan Street, Longgang District, Shenzhen
Product name : SmartWatch
Model name : HCS-P1
Standards : FCC CFR47 Part 15 Section 15.247
ANSI C63.10:2013
Test procedure : KDB 558074 D01 v05r02
Test Date : Jul. 23, 2024 - Aug. 02, 2024
Date of Issue : Aug. 02, 2024
Test Result : Pass

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:



/ Engineer

Technical Manager:



Henry Wang / Manager


Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	6
3 TEST FACILITY	7
4 GENERAL INFORMATION	8
4.1 GENERAL DESCRIPTION OF E.U.T.....	8
4.2 CHANNEL LIST	9
4.3 TEST SETUP CONFIGURATION	11
4.4 TEST MODE	11
5 EQUIPMENT DURING TEST	12
5.1 EQUIPMENTS LIST	12
5.2 MEASUREMENT UNCERTAINTY	14
5.3 DESCRIPTION OF SUPPORT UNITS.....	14
6 CONDUCTED EMISSION	15
6.1 E.U.T. OPERATION	15
6.2 EUT SETUP	15
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
6.4 MEASUREMENT PROCEDURE:.....	16
6.5 CONDUCTED EMISSION LIMIT.....	16
6.6 MEASUREMENT DESCRIPTION	16
6.7 CONDUCTED EMISSION TEST RESULT.....	16
7 RADIATED SPURIOUS EMISSIONS	21
7.1 EUT OPERATION.....	21
7.2 TEST SETUP	22
7.3 SPECTRUM ANALYZER SETUP	23
7.4 TEST PROCEDURE.....	24
7.5 SUMMARY OF TEST RESULTS	25
8 MAXIMUM PEAK OUTPUT POWER TEST(FOR FHSS)	41
8.1 TEST STANDARD AND LIMIT	41
8.2 TEST SETUP	41

8.3	TEST PROCEDURE.....	41
8.4	TEST DATA	42
9	20DB OCCUPY BANDWIDTH TEST(FOR FHSS).....	47
9.1	TEST STANDARD	47
9.2	TEST SETUP	47
9.3	TEST PROCEDURE.....	47
9.4	TEST DATA	48
10	CARRIER FREQUENCY SEPARATION TEST(FOR FHSS)	52
10.1	TEST STANDARD AND LIMIT	52
10.2	TEST SETUP	52
10.3	TEST PROCEDURE.....	52
10.4	TEST DATA	53
11	NUMBER OF HOPPING CHANNEL TEST(FOR FHSS).....	57
11.1	TEST STANDARD AND LIMIT	57
11.2	TEST SETUP	57
11.3	TEST PROCEDURE.....	57
11.4	TEST DATA	57
12	DWELL TIME TEST(FOR FHSS).....	60
12.1	TEST STANDARD AND LIMIT.....	60
12.2	TEST SETUP	60
12.3	TEST PROCEDURE.....	60
12.4	TEST DATA.....	61
13	100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT	63
13.1	TEST STANDARD AND LIMIT.....	65
13.2	TEST SETUP	65
13.3	TEST PROCEDURE.....	65
13.4	TEST DATA.....	65
14	ANTENNA REQUIREMENT.....	80
14.1	TEST STANDARD AND REQUIREMENT	80
14.2	ANTENNA CONNECTED CONSTRUCTION.....	80
15	6DB BANDWIDTH MEASUREMENT(FOR OTHER THAN FHSS).....	81
15.1	TEST PROCEDURE.....	81

15.2	TEST RESULT	81
16	MAXIMUM PEAK OUTPUT POWER(FOR OTHER THAN FHSS).....	85
16.1	TEST PROCEDURE.....	85
16.2	TEST RESULT	85
17	POWER SPECTRAL DENSITY(FOR OTHER THAN FHSS).....	89
17.1	TEST PROCEDURE.....	89
17.2	TEST RESULT	89
18	TEST SETUP & EUT PHOTOGRAPH.....	93

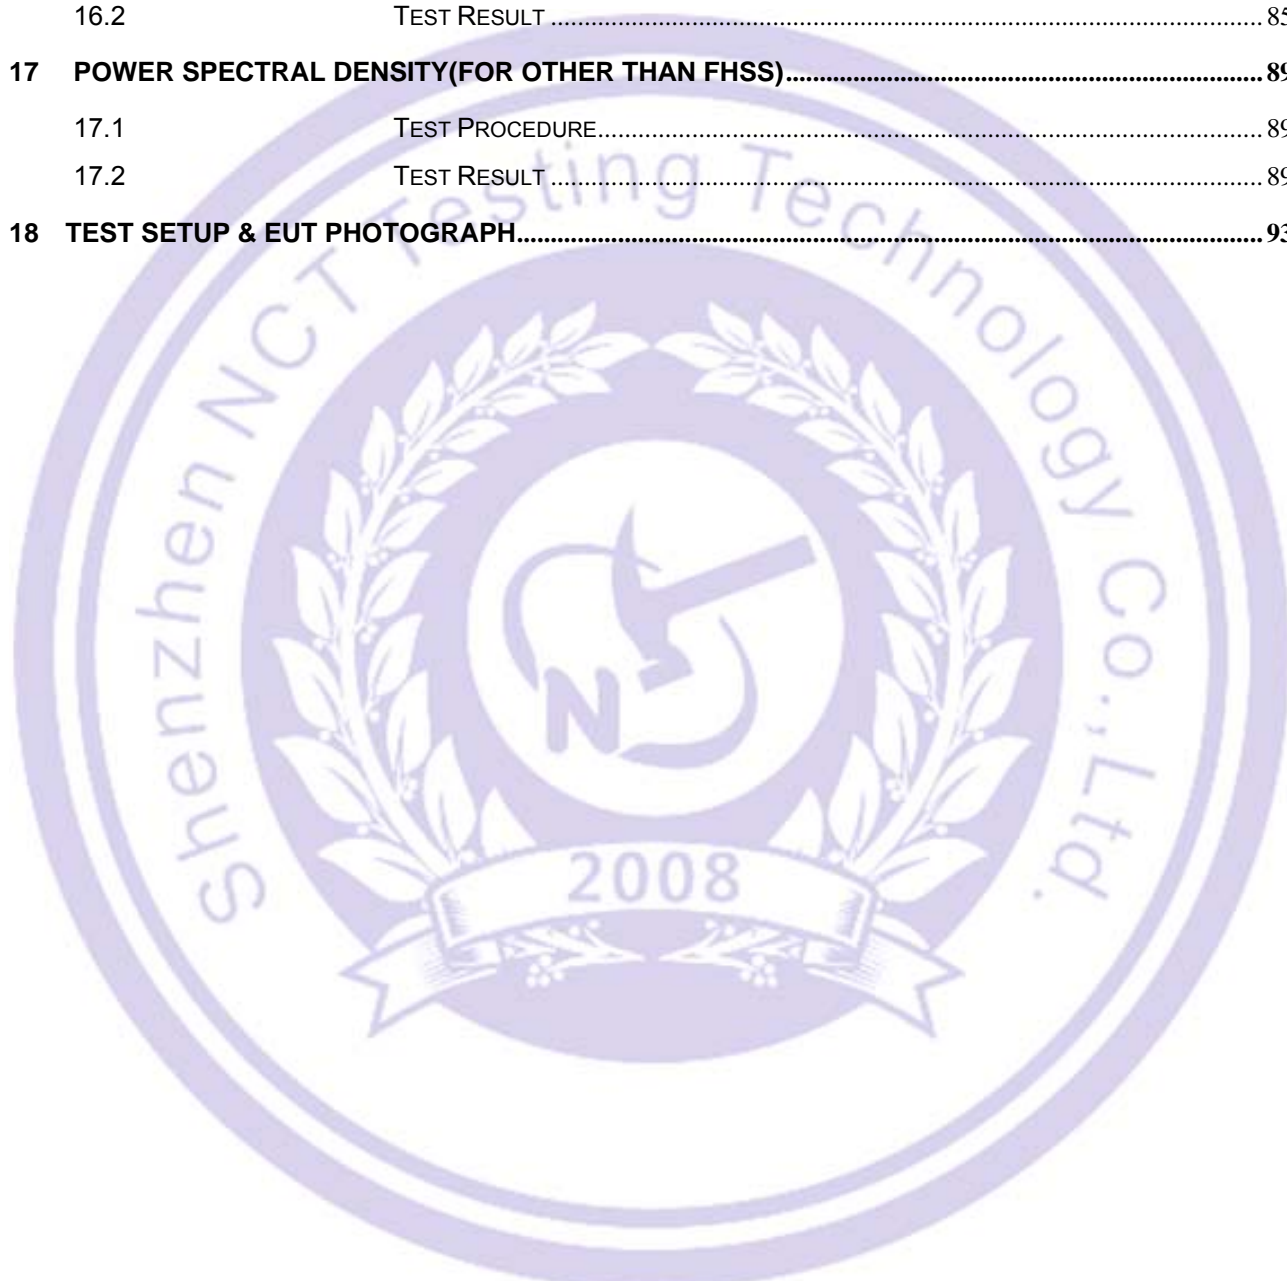

2 Test Summary

BT

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.205/15.209	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203/15.247 (c)	PASS

BLE

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205/15.209	PASS
Conducted Spurious Emission	15.205/15.209	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB&99% Bandwidth	15.247 (a)(2)	PASS
Maximum Peak Output Power	15.247 (b)(3)	PASS
Power Spectral Density	15.247 (e)	PASS
Antenna Requirement	15.203/15.247 (c)	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

3 TEST FACILITY

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

4 General Information

4.1 General Description of E.U.T.

Product Name	:	SmartWatch
Model Name	:	HCS-P1
Sample ID	:	NCT24029473-001
Sample(s) Status:	:	Engineer sample
Additional model	:	N/A
Difference	:	N/A
Operating frequency	:	BT:2402-2480MHz BLE:2402-2480MHz
Numbers of Channel	:	BT: 79 channels BLE: 40 channels
Antenna Type	:	PCB Antenna
Antenna Gain	:	1.2dBi
Type of Modulation	:	BT:GFSK, $\pi/4$ -DQPSK ,8DPSK BLE: GFSK
Power supply	:	DC 3.7V from Battery or DC 5V from adapter input AC 120V/60Hz
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

4.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

BT

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	P20	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

Channel	Frequency(MHz)
0	2402
39	2441
78	2480

BLE

The details of test channels and bandwidth were for RF conductive measurement. The 3 channels of lower, medium and higher were chosen for test.


Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		


Channel	Frequency(MHz)
0	2402
19	2440
39	2480

4.3 Test Setup Configuration

Conducted Emission



Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



Conducted Spurious



4.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

BT

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	39	2441	78	2480

BLE

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	19	2440	39	2480

5 Equipment During Test

5.1 Equipments List

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2024/6/21	2025/6/20
LISN	ENV 216	102796	Rohde & Schwarz	2024/6/21	2025/6/20
LISN	VN1-13S	004023	CRANAGE	2024/6/21	2025/6/20
Cable	RG223-1500MM	NA	RG	2024/6/21	2025/6/20

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2024/6/21	2025/6/20
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2024/6/21	2025/6/20
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2023/3/19	2025/3/18
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	2024/6/21	2025/6/20
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2024/6/21	2025/6/20
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZBECK	2024/6/21	2025/6/20
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00115	SCHNWARZBECK	2024/6/21	2025/6/20
Amplifier (9KHz-30MHz)	BBV 9745	00109	CHNWARZBECK	2024/6/21	2025/6/20

MXG Signal Analyzer	N9020A	MY50510202	Agilent	2024/6/21	2025/6/20
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2024/6/21	2025/6/20
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2024/6/21	2025/6/20
Power Sensor	TR1029-2	512364	Techoy	2024/6/21	2025/6/20
RF Swith	TR1029-1	512364	Techoy	2024/6/21	2025/6/20
Cable	DA800-4000MM	NA	DA	2024/6/21	2025/6/20
Cable	DA800-11000MM	NA	DA	2024/6/21	2025/6/20

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	SmartWatch	N/A	HCS-P1	N/A	EUT
E-2	Adapter	anju	A18A-050100U-US2	AJ-230600002514	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
Test Method: : ANSI C63.10:2013
Test Result: : PASS
Frequency Range: : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :


Temperature: : 23.2°C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.12 kPa
Test Voltage : AC 120V/60Hz

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

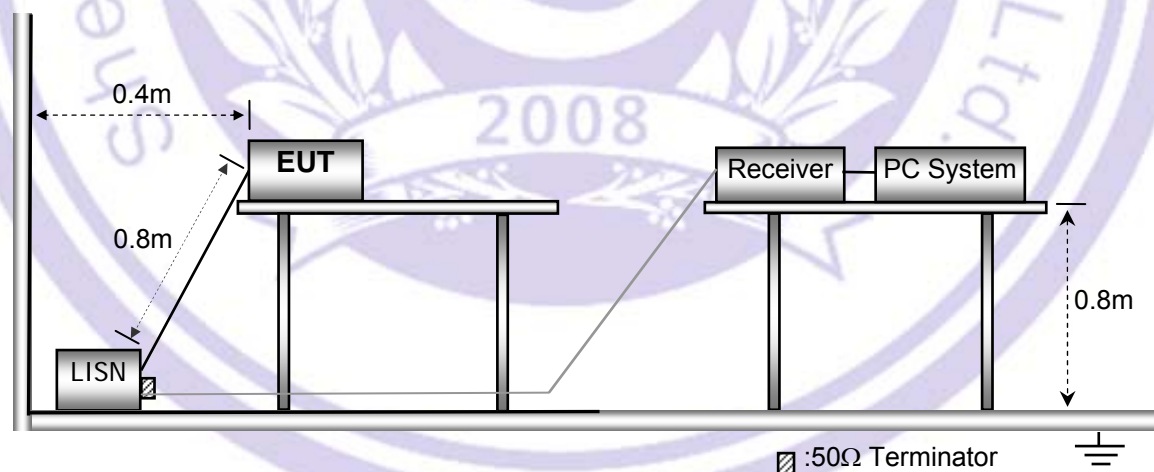

6.3 Test SET-UP (Block Diagram of Configuration)

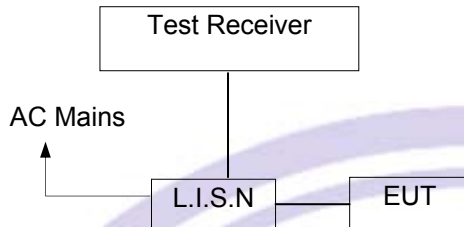

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.7 Conducted Emission Test Result

Pass

BT


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	Highest	Phase :	L
----------	---------	---------	---

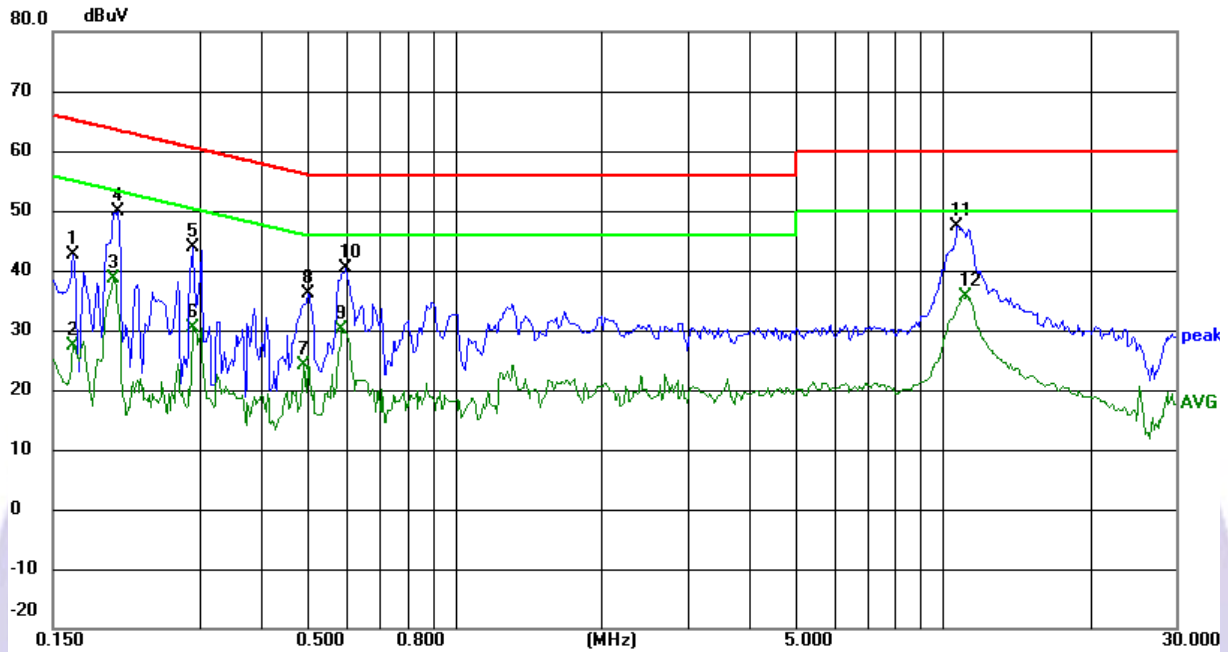

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	32.79	9.77	42.56	65.18	-22.62	peak	P
2	0.1655	17.59	9.77	27.36	55.18	-27.82	AVG	P
3	0.2006	28.91	9.75	38.66	53.59	-14.93	AVG	P
4	0.2046	40.01	9.75	49.76	63.42	-13.66	peak	P
5	0.2903	34.16	9.76	43.92	60.52	-16.60	peak	P
6	0.2903	20.59	9.76	30.35	50.52	-20.17	AVG	P
7	0.4893	14.48	9.77	24.25	46.18	-21.93	AVG	P
8	0.5010	26.32	9.77	36.09	56.00	-19.91	peak	P
9	0.5866	20.30	9.77	30.07	46.00	-15.93	AVG	P
10	0.5985	30.53	9.77	40.30	56.00	-15.70	peak	P
11 *	10.7103	26.52	20.90	47.42	60.00	-12.58	peak	P
12	11.1783	14.35	21.39	35.74	50.00	-14.26	AVG	P

Channel:	Highest	Phase :	N
----------	---------	---------	---

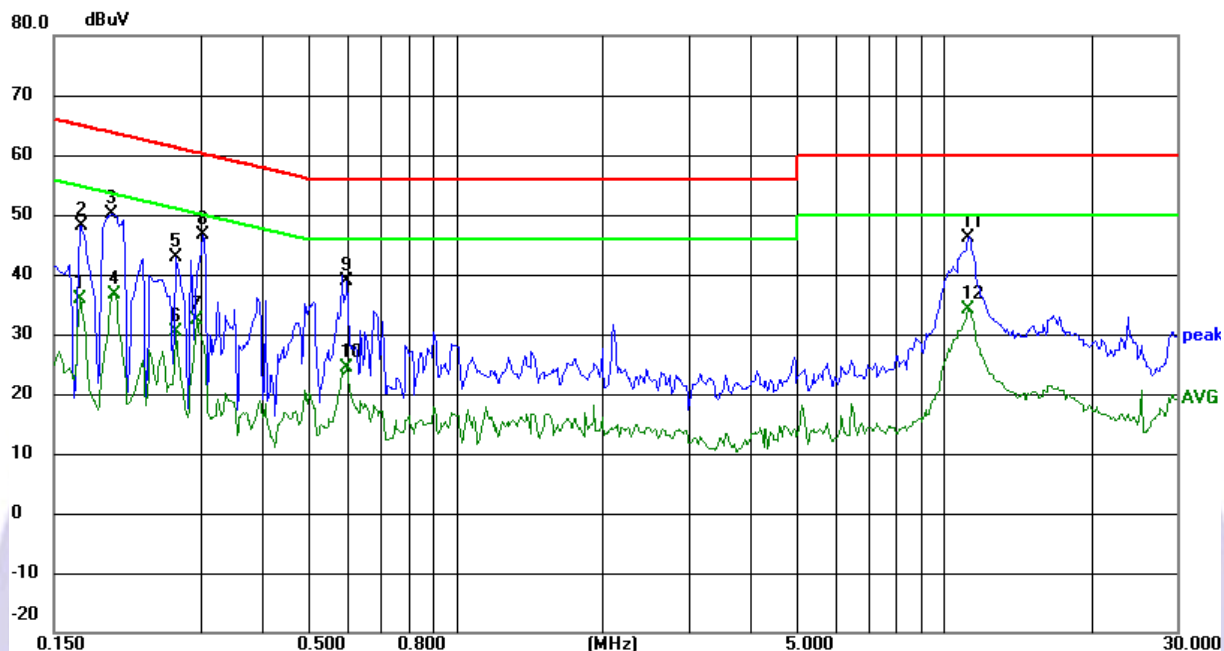

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	26.18	9.77	35.95	54.98	-19.03	AVG	P
2	0.1703	38.33	9.77	48.10	64.95	-16.85	peak	P
3	0.1968	40.43	9.75	50.18	63.74	-13.56	peak	P
4	0.2006	26.98	9.75	36.73	53.59	-16.86	AVG	P
5	0.2670	33.10	9.75	42.85	61.21	-18.36	peak	P
6	0.2670	20.62	9.75	30.37	51.21	-20.84	AVG	P
7	0.2943	22.52	9.76	32.28	50.40	-18.12	AVG	P
8 *	0.3019	36.99	9.76	46.75	60.19	-13.44	peak	P
9	0.5985	29.08	9.77	38.85	56.00	-17.15	peak	P
10	0.5985	14.73	9.77	24.50	46.00	-21.50	AVG	P
11	11.1978	24.78	21.41	46.19	60.00	-13.81	peak	P
12	11.1978	12.74	21.41	34.15	50.00	-15.85	AVG	P


Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

BLE


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK 1M, Highest channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	Highest	Phase :	L
----------	---------	---------	---

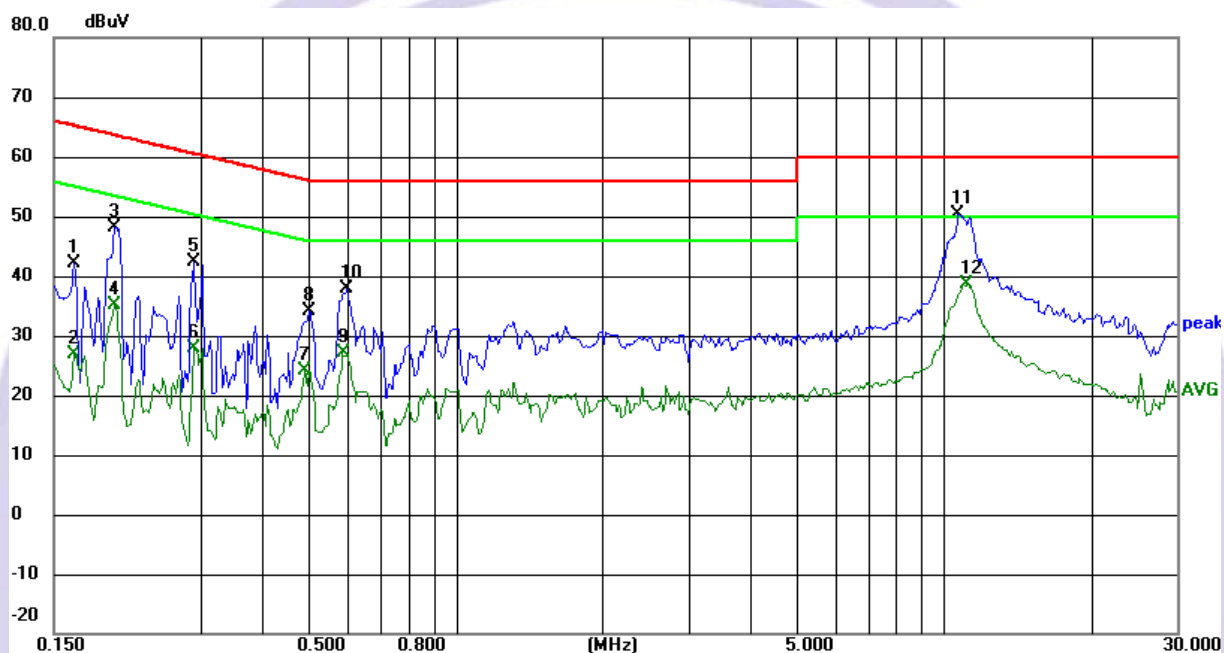

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1655	32.29	9.77	42.06	65.18	-23.12	peak	P
2	0.1655	17.09	9.77	26.86	55.18	-28.32	AVG	P
3	0.2006	38.46	9.75	48.21	63.59	-15.38	peak	P
4	0.2006	25.41	9.75	35.16	53.59	-18.43	AVG	P
5	0.2903	32.66	9.76	42.42	60.52	-18.10	peak	P
6	0.2903	18.09	9.76	27.85	50.52	-22.67	AVG	P
7	0.4893	14.48	9.77	24.25	46.18	-21.93	AVG	P
8	0.5010	24.32	9.77	34.09	56.00	-21.91	peak	P
9	0.5867	17.30	9.77	27.07	46.00	-18.93	AVG	P
10	0.5985	28.03	9.77	37.80	56.00	-18.20	peak	P
11 *	10.7103	29.52	20.90	50.42	60.00	-9.58	peak	P
12	11.1783	17.35	21.39	38.74	50.00	-11.26	AVG	P

Channel:	Highest	Phase :	N
----------	---------	---------	---

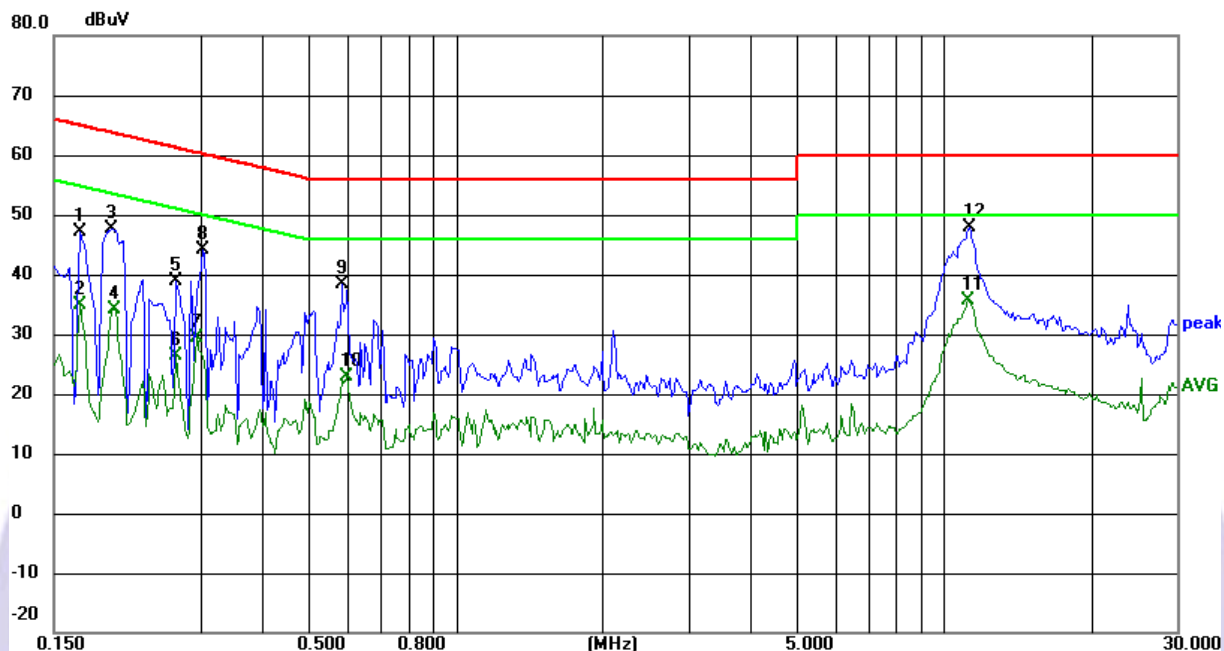

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	37.33	9.77	47.10	64.98	-17.88	peak	P
2	0.1695	25.18	9.77	34.95	54.98	-20.03	AVG	P
3	0.1968	37.93	9.75	47.68	63.74	-16.06	peak	P
4	0.2006	24.48	9.75	34.23	53.59	-19.36	AVG	P
5	0.2670	29.10	9.75	38.85	61.21	-22.36	peak	P
6	0.2670	16.62	9.75	26.37	51.21	-24.84	AVG	P
7	0.2943	19.52	9.76	29.28	50.40	-21.12	AVG	P
8	0.3020	34.49	9.76	44.25	60.19	-15.94	peak	P
9	0.5828	28.53	9.77	38.30	56.00	-17.70	peak	P
10	0.5985	13.23	9.77	23.00	46.00	-23.00	AVG	P
11	11.1978	14.24	21.41	35.65	50.00	-14.35	AVG	P
12 *	11.2680	26.40	21.49	47.89	60.00	-12.11	peak	P

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor

7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
 Humidity : 55.5% RH
 Atmospheric Pressure : 101.3kPa
 Test Voltage : DC 3.7V


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

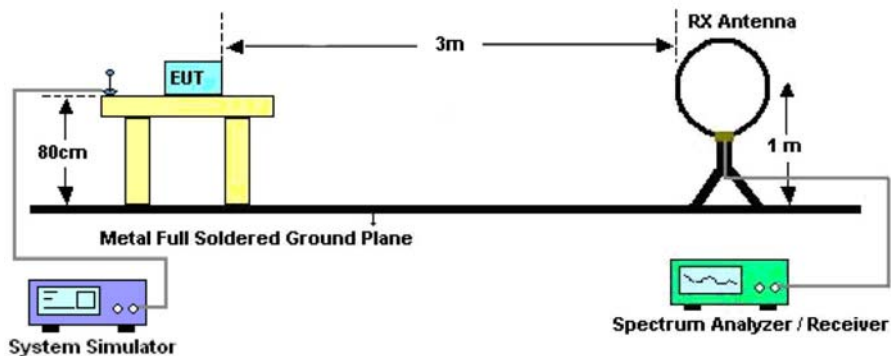

The test setup for emission measurement from 30 MHz to 1 GHz.

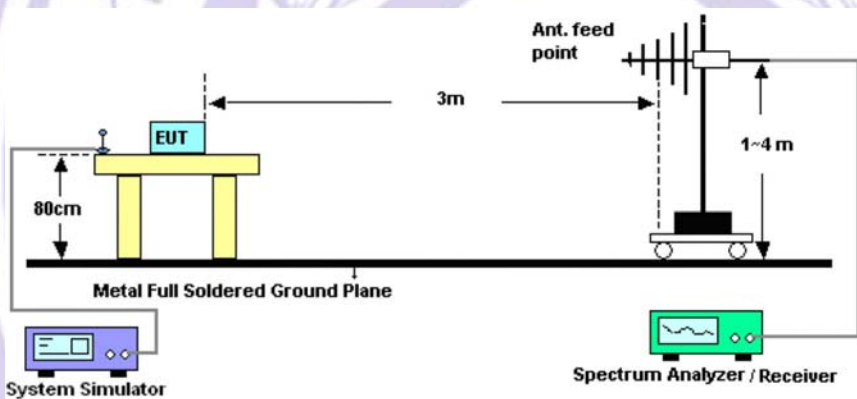

The test setup for emission measurement above 1 GHz.

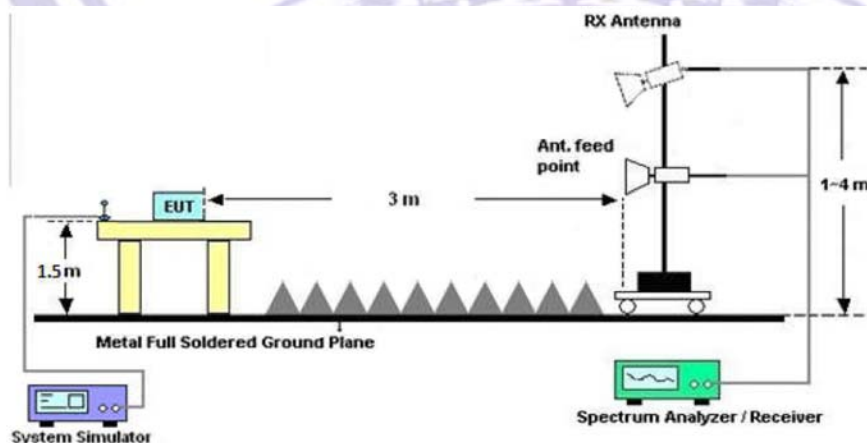

7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

BT

Please refer to the following test plots, High Channel (2480MHz) Worst case GFSK for record:


Test plot for Horizontal

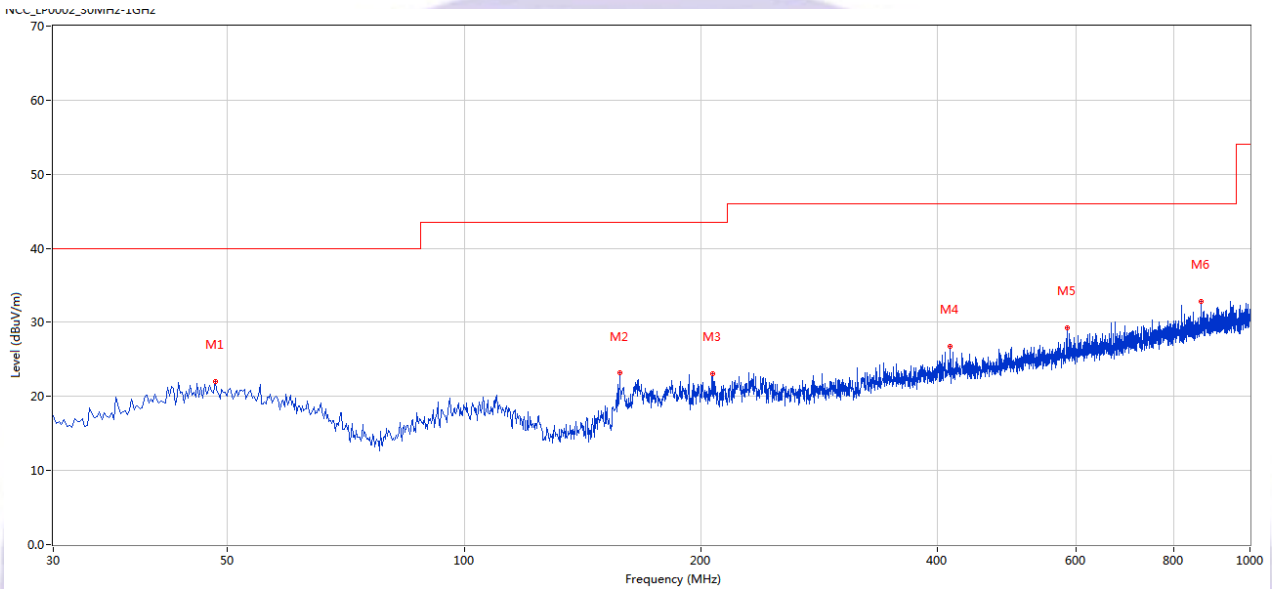

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	48.183	21.98	-11.26	40.0	18.02	Peak	Horizontal	Pass
2	157.766	23.14	-16.55	43.5	20.36	Peak	Horizontal	Pass
3	206.981	23.09	-13.67	43.5	20.41	Peak	Horizontal	Pass
4	414.994	26.75	-8.24	46.0	19.25	Peak	Horizontal	Pass
5	585.914	29.22	-5.48	46.0	16.78	Peak	Horizontal	Pass
6	866.416	32.77	-2.39	46.0	13.23	Peak	Horizontal	Pass

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test plot for Vertical

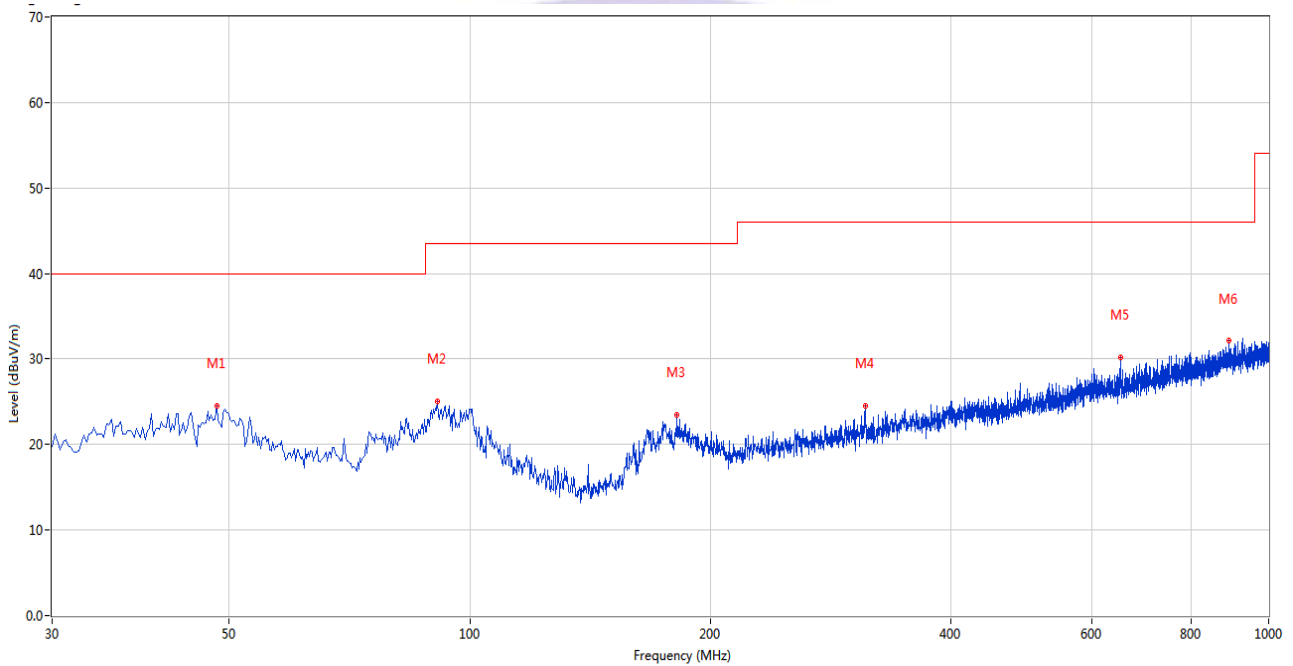


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	48.183	24.56	-11.26	40.0	15.44	Peak	Vertical	Pass
2	91.095	25.07	-14.89	43.5	18.43	Peak	Vertical	Pass
3	181.767	23.46	-15.05	43.5	20.04	Peak	Vertical	Pass
4	312.442	24.57	-10.78	46.0	21.43	Peak	Vertical	Pass
5	653.069	30.15	-4.53	46.0	15.85	Peak	Vertical	Pass
6	891.145	32.23	-1.92	46.0	13.77	Peak	Vertical	Pass

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

BLE

Please refer to the following test plots for the worst test mode (GFSK, Highest Channel).


Test plot for Horizontal

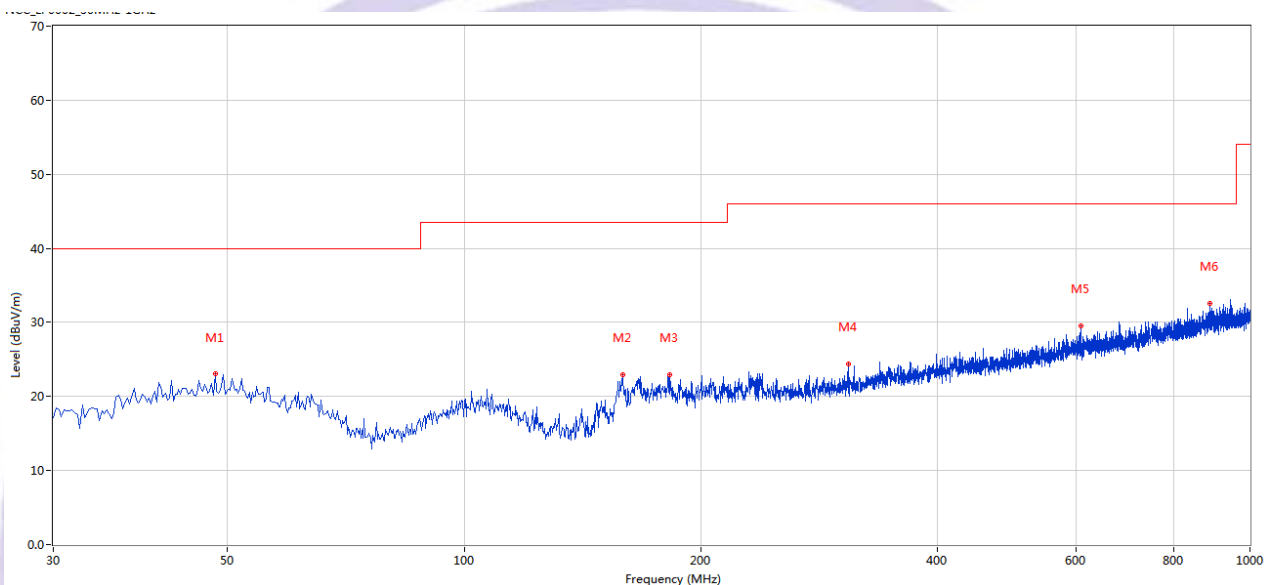

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	48.183	23.01	-11.26	40.0	16.99	Peak	Horizontal	Pass
2	158.978	22.99	-16.44	43.5	20.51	Peak	Horizontal	Pass
3	182.494	22.91	-14.98	43.5	20.59	Peak	Horizontal	Pass
4	308.078	24.39	-10.91	46.0	21.61	Peak	Horizontal	Pass
5	608.703	29.56	-5.00	46.0	16.44	Peak	Horizontal	Pass
6	889.690	32.52	-1.90	46.0	13.48	Peak	Horizontal	Pass

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor

Test plot for Vertical

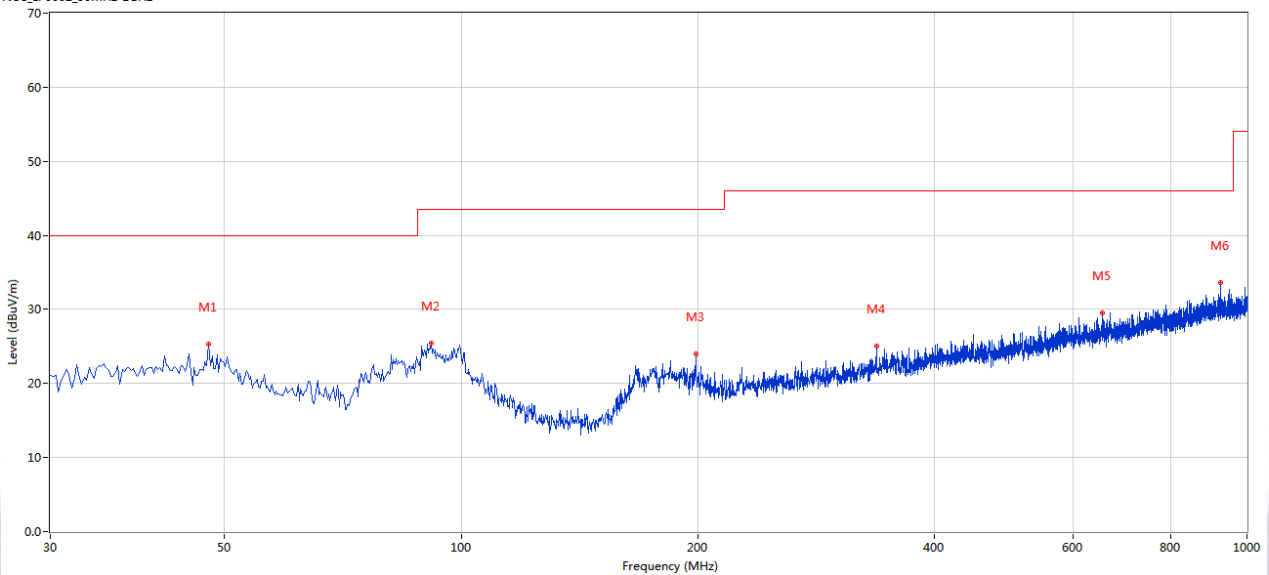

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	ANT	Verdict
1	47.698	25.32	-11.34	40.0	14.68	Peak	Vertical	Pass
2	91.580	25.48	-14.78	43.5	18.02	Peak	Vertical	Pass
3	198.980	24.03	-13.50	43.5	19.47	Peak	Vertical	Pass
4	337.898	24.99	-9.79	46.0	21.01	Peak	Vertical	Pass
5	654.766	29.52	-4.49	46.0	16.48	Peak	Vertical	Pass
6	926.541	33.63	-1.65	46.0	12.37	Peak	Vertical	Pass

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Test Frequency 1GHz-25GHz

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	55.73	34.12	5.03	32.39	59.03	74.00	-14.97	Pk
V	4804.00	41.22	34.12	5.03	32.39	44.52	54.00	-9.48	AV
V	7206.00	45.09	32.54	6.29	35.86	54.7	74.00	-19.3	Pk
V	7206.00	32.29	32.54	6.29	35.86	41.9	54.00	-12.1	AV
V	9608.00	41.77	32.98	7.55	38.4	54.74	74.00	-19.26	Pk
V	9608.00	30.53	32.98	7.55	38.4	43.5	54.00	-10.5	AV
V	12010.00	41.56	32.09	8.93	39	57.4	74.00	-16.6	Pk
V	12010.00	25.52	32.09	8.93	39	41.36	54.00	-12.64	AV
H	4804.00	51.03	34.12	5.03	32.39	54.33	74.00	-19.67	Pk
H	4804.00	38.41	34.12	5.03	32.39	41.71	54.00	-12.29	AV
H	7206.00	46.88	32.54	6.29	35.86	56.49	74.00	-17.51	Pk
H	7206.00	33.21	32.54	6.29	35.86	42.82	54.00	-11.18	AV
H	9608.00	45.23	32.98	7.55	38.4	58.2	74.00	-15.8	Pk
H	9608.00	31.02	32.98	7.55	38.4	43.99	54.00	-10.01	AV
H	12010.00	36.59	32.09	8.93	39	52.43	74.00	-21.57	Pk
H	12010.00	25.78	32.09	8.93	39	41.62	54.00	-12.38	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2441MHz									
V	4882.00	52.95	34.07	5.09	32.59	56.56	74.00	-17.44	Pk
V	4882.00	40.02	34.07	5.09	32.59	43.63	54.00	-10.37	AV
V	7323.00	46.35	32.63	6.34	35.96	56.02	74.00	-17.98	Pk
V	7323.00	33.85	32.63	6.34	35.96	43.52	54.00	-10.48	AV
V	9764.00	41.25	32.92	7.59	38.4	54.32	74.00	-19.68	Pk
V	9764.00	29.16	32.92	7.59	38.4	42.23	54.00	-11.77	AV
V	12205.00	40.52	31.96	8.88	39.04	56.48	74.00	-17.52	Pk
V	12205.00	27.41	31.96	8.88	39.04	43.37	54.00	-10.63	AV
H	4882.00	50.02	34.07	5.09	32.59	53.63	74.00	-20.37	Pk
H	4882.00	36.36	34.07	5.09	32.59	39.97	54.00	-14.03	AV
H	7323.00	46.11	32.63	6.34	35.96	55.78	74.00	-18.22	Pk
H	7323.00	32.02	32.63	6.34	35.96	41.69	54.00	-12.31	AV
H	9764.00	41.58	32.92	7.59	38.4	54.65	74.00	-19.35	Pk
H	9764.00	26.21	32.92	7.59	38.4	39.28	54.00	-14.72	AV
H	12205.00	40.02	31.96	8.88	39.04	55.98	74.00	-18.02	Pk
H	12205.00	26.33	31.96	8.88	39.04	42.29	54.00	-11.71	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	51.59	34.02	5.15	32.8	55.52	74.00	-18.48	Pk
V	4960.00	39.96	34.02	5.15	32.8	43.89	54.00	-10.11	AV
V	7440.00	46.95	32.71	6.4	36.05	56.69	74.00	-17.31	Pk
V	7440.00	34.05	32.71	6.4	36.05	43.79	54.00	-10.21	AV
V	9920.00	41.23	32.86	7.62	38.4	54.39	74.00	-19.61	Pk
V	9920.00	30.58	32.86	7.62	38.4	43.74	54.00	-10.26	AV
V	12400.00	42.56	31.82	8.84	39.08	58.66	74.00	-15.34	Pk
V	12400.00	27.56	31.82	8.84	39.08	43.66	54.00	-10.34	AV
H	4960.00	50.26	34.02	5.15	32.8	54.19	74.00	-19.81	Pk
H	4960.00	39.12	34.02	5.15	32.8	43.05	54.00	-10.95	AV
H	7440.00	45.23	32.71	6.4	36.05	54.97	74.00	-19.03	Pk
H	7440.00	34.52	32.71	6.4	36.05	44.26	54.00	-9.74	AV
H	9920.00	44.02	32.86	7.62	38.4	57.18	74.00	-16.82	Pk
H	9920.00	30.57	32.86	7.62	38.4	43.73	54.00	-10.27	AV
H	12400.00	40.21	31.82	8.84	39.08	56.31	74.00	-17.69	Pk
H	12400.00	25.53	31.82	8.84	39.08	41.63	54.00	-12.37	AV

Note: 1. The testing has been conformed to $10 \times 2480\text{MHz} = 24800\text{MHz}$.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

4. All the modes have tested and recorded the worst mode(GFSK) in the report

BLE

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	53.02	34.12	5.03	32.39	56.32	74.00	-17.68	Pk
V	4804.00	42.22	34.12	5.03	32.39	45.52	54.00	-8.48	AV
V	7206.00	47.86	32.54	6.29	35.86	57.47	74.00	-16.53	Pk
V	7206.00	37.01	32.54	6.29	35.86	46.62	54.00	-7.38	AV
V	9608.00	47.75	32.98	7.55	38.4	60.72	74.00	-13.28	Pk
V	9608.00	33.24	32.98	7.55	38.4	46.21	54.00	-7.79	AV
V	12010.00	43.58	32.09	8.93	39	59.42	74.00	-14.58	Pk
V	12010.00	31.08	32.09	8.93	39	46.92	54.00	-7.08	AV
H	4804.00	51.22	34.12	5.03	32.39	54.52	74.00	-19.48	Pk
H	4804.00	38.63	34.12	5.03	32.39	41.93	54.00	-12.07	AV
H	7206.00	46.89	32.54	6.29	35.86	56.5	74.00	-17.5	Pk
H	7206.00	35.23	32.54	6.29	35.86	44.84	54.00	-9.16	AV
H	9608.00	47.89	32.98	7.55	38.4	60.86	74.00	-13.14	Pk
H	9608.00	33.02	32.98	7.55	38.4	45.99	54.00	-8.01	AV
H	12010.00	41.77	32.09	8.93	39	57.61	74.00	-16.39	Pk
H	12010.00	30.75	32.09	8.93	39	46.59	54.00	-7.41	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2440MHz									
V	4880.00	53.35	34.07	5.09	32.59	56.96	74.00	-17.04	Pk
V	4880.00	42.23	34.07	5.09	32.59	45.84	54.00	-8.16	AV
V	7320.00	45.89	32.63	6.34	35.96	55.56	74.00	-18.44	Pk
V	7320.00	35.12	32.63	6.34	35.96	44.79	54.00	-9.21	AV
V	9760.00	42.2	32.92	7.59	38.4	55.27	74.00	-18.73	Pk
V	9760.00	31.55	32.92	7.59	38.4	44.62	54.00	-9.38	AV
V	12200.00	40.13	31.96	8.88	39.04	56.09	74.00	-17.91	Pk
V	12200.00	29.85	31.96	8.88	39.04	45.81	54.00	-8.19	AV
H	4880.00	50.12	34.07	5.09	32.59	53.73	74.00	-20.27	Pk
H	4880.00	40.08	34.07	5.09	32.59	43.69	54.00	-10.31	AV
H	7320.00	45.21	32.63	6.34	35.96	54.88	74.00	-19.12	Pk
H	7320.00	33.54	32.63	6.34	35.96	43.21	54.00	-10.79	AV
H	9760.00	42.04	32.92	7.59	38.4	55.11	74.00	-18.89	Pk
H	9760.00	29.96	32.92	7.59	38.4	43.03	54.00	-10.97	AV
H	12200.00	40.95	31.96	8.88	39.04	56.91	74.00	-17.09	Pk
H	12200.00	27.02	31.96	8.88	39.04	42.98	54.00	-11.02	AV

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2480MHz									
V	4960.00	46.9	34.02	5.15	32.8	50.83	74.00	-23.17	Pk
V	4960.00	36.77	34.02	5.15	32.8	40.7	54.00	-13.3	AV
V	7440.00	45.99	32.71	6.4	36.05	55.73	74.00	-18.27	Pk
V	7440.00	35.18	32.71	6.4	36.05	44.92	54.00	-9.08	AV
V	9920.00	41.19	32.86	7.62	38.4	54.35	74.00	-19.65	Pk
V	9920.00	27.68	32.86	7.62	38.4	40.84	54.00	-13.16	AV
V	12400.00	39.29	31.82	8.84	39.08	55.39	74.00	-18.61	Pk
V	12400.00	28.08	31.82	8.84	39.08	44.18	54.00	-9.82	AV
H	4960.00	49.56	34.02	5.15	32.8	53.49	74.00	-20.51	Pk
H	4960.00	37.9	34.02	5.15	32.8	41.83	54.00	-12.17	AV
H	7440.00	46.05	32.71	6.4	36.05	55.79	74.00	-18.21	Pk
H	7440.00	32.35	32.71	6.4	36.05	42.09	54.00	-11.91	AV
H	9920.00	38.97	32.86	7.62	38.4	52.13	74.00	-21.87	Pk
H	9920.00	28.05	32.86	7.62	38.4	41.21	54.00	-12.79	AV
H	12400.00	39.94	31.82	8.84	39.08	56.04	74.00	-17.96	Pk
H	12400.00	27.82	31.82	8.84	39.08	43.92	54.00	-10.08	AV

Note: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. All the modes have tested and recorded the worst mode(GFSK 1M) in the report

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

BT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
GFSK	Low Channel: 2402MHz									
	H	2310.00	55.68	35.17	3.48	27.49	51.48	74.00	PK	PASS
	H	2310.00	46.96	35.17	3.48	27.49	42.76	54.00	AV	PASS
	H	2390.00	58.49	35.17	3.48	27.49	54.29	74.00	PK	PASS
	H	2390.00	50.59	35.17	3.48	27.49	46.39	54.00	AV	PASS
	H	2400.00	61.50	35.16	3.49	27.52	57.35	74.00	PK	PASS
	H	2400.00	50.74	35.16	3.49	27.52	46.59	54.00	AV	PASS
	V	2310.00	54.99	35.17	3.48	27.49	50.79	74.00	PK	PASS
	V	2310.00	46.06	35.17	3.48	27.49	41.86	54.00	AV	PASS
	V	2390.00	58.05	35.17	3.48	27.49	53.85	74.00	PK	PASS
	V	2390.00	51.40	35.17	3.48	27.49	47.2	54.00	AV	PASS
	V	2400.00	60.00	35.16	3.49	27.52	55.85	74.00	PK	PASS
	V	2400.00	51.14	35.16	3.49	27.52	46.99	54.00	AV	PASS
	High Channel: 2480MHz									
	H	2483.50	58.96	35.11	3.56	27.75	55.16	74.00	PK	PASS
	H	2483.50	50.07	35.11	3.56	27.75	46.27	54.00	AV	PASS
	H	2500.00	59.51	35.1	3.57	27.8	55.78	74.00	PK	PASS
	H	2500.00	49.42	35.1	3.57	27.8	45.69	54.00	AV	PASS
V	2483.50	58.33	35.11	3.56	27.75	54.53	74.00	PK	PASS	
V	2483.50	49.12	35.11	3.56	27.75	45.32	54.00	AV	PASS	
V	2500.00	58.88	35.1	3.57	27.8	55.15	74.00	PK	PASS	
V	2500.00	49.41	35.1	3.57	27.8	45.68	54.00	AV	PASS	

		Low Channel: 2402MHz									
π/4-DQPSK	H	2310.00	55.43	35.17	3.48	27.49	51.23	74.00	PK	PASS	
	H	2310.00	47.13	35.17	3.48	27.49	42.93	54.00	AV	PASS	
	H	2390.00	58.70	35.17	3.48	27.49	54.5	74.00	PK	PASS	
	H	2390.00	50.07	35.17	3.48	27.49	45.87	54.00	AV	PASS	
	H	2400.00	59.68	35.16	3.49	27.52	55.53	74.00	PK	PASS	
	H	2400.00	51.00	35.16	3.49	27.52	46.85	54.00	AV	PASS	
	V	2310.00	54.40	35.17	3.48	27.49	50.2	74.00	PK	PASS	
	V	2310.00	44.88	35.17	3.48	27.49	40.68	54.00	AV	PASS	
	V	2390.00	58.53	35.17	3.48	27.49	54.33	74.00	PK	PASS	
	V	2390.00	49.59	35.17	3.48	27.49	45.39	54.00	AV	PASS	
	V	2400.00	59.00	35.16	3.49	27.52	54.85	74.00	PK	PASS	
	V	2400.00	50.35	35.16	3.49	27.52	46.2	54.00	AV	PASS	
			High Channel: 2480MHz								
		H	2483.50	57.69	35.11	3.56	27.75	53.89	74.00	PK	PASS
	H	2483.50	49.79	35.11	3.56	27.75	45.99	54.00	AV	PASS	
	H	2500.00	60.33	35.10	3.57	27.80	56.6	74.00	PK	PASS	
	H	2500.00	50.51	35.10	3.57	27.80	46.78	54.00	AV	PASS	
	V	2483.50	59.25	35.11	3.56	27.75	55.45	74.00	PK	PASS	
	V	2483.50	51.14	35.11	3.56	27.75	47.34	54.00	AV	PASS	
	V	2500.00	59.34	35.10	3.57	27.80	55.61	74.00	PK	PASS	
	V	2500.00	49.50	35.10	3.57	27.80	45.77	54.00	AV	PASS	
		Low Channel: 2402MHz									
8-DPSK	H	2310.00	55.03	35.17	3.48	27.49	50.83	74.00	PK	PASS	
	H	2310.00	46.57	35.17	3.48	27.49	42.37	54.00	AV	PASS	
	H	2390.00	58.12	35.17	3.48	27.49	53.92	74.00	PK	PASS	
	H	2390.00	49.86	35.17	3.48	27.49	45.66	54.00	AV	PASS	

H	2400.00	60.52	35.16	3.49	27.52	56.37	74.00	PK	PASS	
H	2400.00	49.95	35.16	3.49	27.52	45.8	54.00	AV	PASS	
V	2310.00	54.02	35.17	3.48	27.49	49.82	74.00	PK	PASS	
V	2310.00	44.65	35.17	3.48	27.49	40.45	54.00	AV	PASS	
V	2390.00	58.11	35.17	3.48	27.49	53.91	74.00	PK	PASS	
V	2390.00	50.42	35.17	3.48	27.49	46.22	54.00	AV	PASS	
V	2400.00	59.89	35.16	3.49	27.52	55.74	74.00	PK	PASS	
V	2400.00	50.03	35.16	3.49	27.52	45.88	54.00	AV	PASS	
High Channel: 2480MHz										
H	2483.50	57.56	35.11	3.56	27.75	53.76	74.00	PK	PASS	
H	2483.50	50.02	35.11	3.56	27.75	46.22	54.00	AV	PASS	
H	2500.00	59.98	35.1	3.57	27.8	56.25	74.00	PK	PASS	
H	2500.00	50.85	35.1	3.57	27.8	47.12	54.00	AV	PASS	
V	2483.50	58.74	35.11	3.56	27.75	54.94	74.00	PK	PASS	
V	2483.50	60.12	35.11	3.56	27.75	56.32	54.00	AV	PASS	
V	2500.00	59.23	35.1	3.57	27.8	55.5	74.00	PK	PASS	
V	2500.00	49.57	35.1	3.57	27.8	45.84	54.00	AV	PASS	

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

BLE

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result	
Low Channel: 2402MHz											
GFSK 1M	H	2310.00	53.57	35.17	3.48	27.49	49.37	74.00	PK	PASS	
	H	2310.00	46.44	35.17	3.48	27.49	42.24	54.00	AV	PASS	
	H	2390.00	59.07	35.17	3.48	27.49	54.87	74.00	PK	PASS	
	H	2390.00	50.22	35.17	3.48	27.49	46.02	54.00	AV	PASS	
	H	2400.00	61.04	35.16	3.49	27.52	56.89	74.00	PK	PASS	
	H	2400.00	50.52	35.16	3.49	27.52	46.37	54.00	AV	PASS	
	V	2310.00	53.07	35.17	3.48	27.49	48.87	74.00	PK	PASS	
	V	2310.00	46.7	35.17	3.48	27.49	42.5	54.00	AV	PASS	
	V	2390.00	59.66	35.17	3.48	27.49	55.46	74.00	PK	PASS	
	V	2390.00	50.58	35.17	3.48	27.49	46.38	54.00	AV	PASS	
	V	2400.00	60.78	35.16	3.49	27.52	56.63	74.00	PK	PASS	
	V	2400.00	51.26	35.16	3.49	27.52	47.11	54.00	AV	PASS	
	High Channel: 2480MHz										
	H	2483.50	58.77	35.11	3.56	27.75	54.97	74.00	PK	PASS	
H	2483.50	49.2	35.11	3.56	27.75	45.4	54.00	AV	PASS		
H	2500.00	59.74	35.1	3.57	27.8	56.01	74.00	PK	PASS		
H	2500.00	49.44	35.1	3.57	27.8	45.71	54.00	AV	PASS		
V	2483.50	59.47	35.11	3.56	27.75	55.67	74.00	PK	PASS		
V	2483.50	51.52	35.11	3.56	27.75	47.72	54.00	AV	PASS		
V	2500.00	60.11	35.1	3.57	27.8	56.38	74.00	PK	PASS		
V	2500.00	50.76	35.1	3.57	27.8	47.03	54.00	AV	PASS		
Low Channel: 2402MHz											

GFSK 2M	H	2310.00	53.22	35.17	3.48	27.49	49.02	74.00	PK	PASS	
	H	2310.00	46.05	35.17	3.48	27.49	41.85	54.00	AV	PASS	
	H	2390.00	58.33	35.17	3.48	27.49	54.13	74.00	PK	PASS	
	H	2390.00	50.64	35.17	3.48	27.49	46.44	54.00	AV	PASS	
	H	2400.00	60.55	35.16	3.49	27.52	56.4	74.00	PK	PASS	
	H	2400.00	50.79	35.16	3.49	27.52	46.64	54.00	AV	PASS	
	V	2310.00	53.43	35.17	3.48	27.49	49.23	74.00	PK	PASS	
	V	2310.00	46.69	35.17	3.48	27.49	42.49	54.00	AV	PASS	
	V	2390.00	59.76	35.17	3.48	27.49	55.56	74.00	PK	PASS	
	V	2390.00	50.59	35.17	3.48	27.49	46.39	54.00	AV	PASS	
	V	2400.00	60.63	35.16	3.49	27.52	56.48	74.00	PK	PASS	
	V	2400.00	51.09	35.16	3.49	27.52	46.94	54.00	AV	PASS	
	High Channel: 2480MHz										
	H	2483.50	58.83	35.11	3.56	27.75	55.03	74.00	PK	PASS	
H	2483.50	49.69	35.11	3.56	27.75	45.89	54.00	AV	PASS		
H	2500.00	60.22	35.1	3.57	27.8	56.49	74.00	PK	PASS		
H	2500.00	50.24	35.1	3.57	27.8	46.51	54.00	AV	PASS		
V	2483.50	60	35.11	3.56	27.75	56.2	74.00	PK	PASS		
V	2483.50	51.56	35.11	3.56	27.75	47.76	54.00	AV	PASS		
V	2500.00	59.84	35.1	3.57	27.8	56.11	74.00	PK	PASS		
V	2500.00	51.04	35.1	3.57	27.8	47.31	54.00	AV	PASS		

Remark:


1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

8 Maximum Peak Output Power Test(For FHSS)

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(1)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

8.2 Test Setup




8.3 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold


8.4 Test Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	0.317	30.00	Pass
	Middle	1.527		
	Highest	2.374		
$\pi/4$ -DQPSK	Lowest	-1.136	20.97	Pass
	Middle	0.074		
	Highest	1.030		
8-DPSK	Lowest	-0.644	20.97	Pass
	Middle	0.594		
	Highest	1.529		


Test plots
GFSK Low Channel

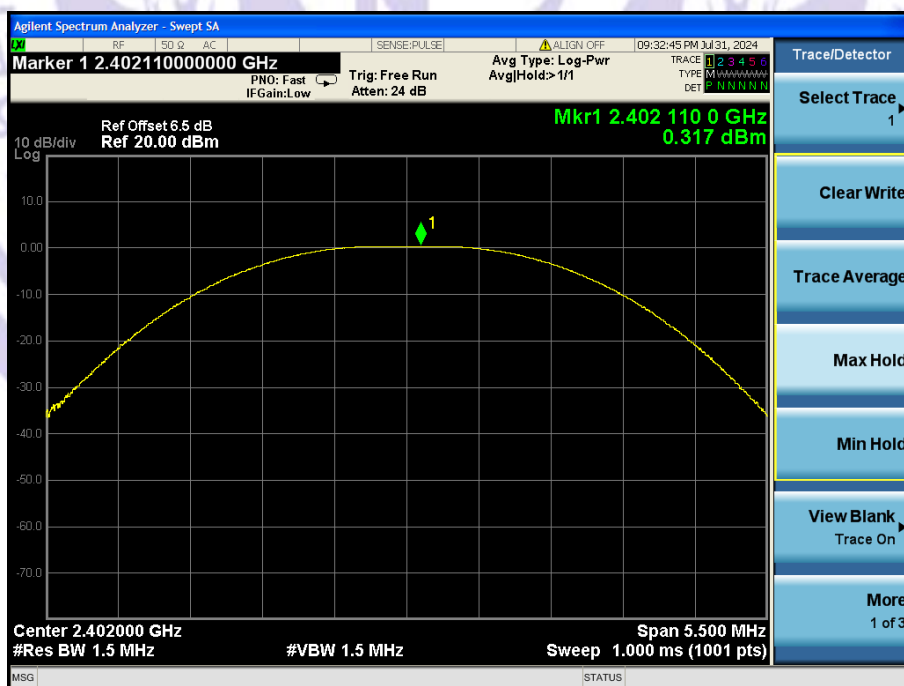


GFSK Middle Channel

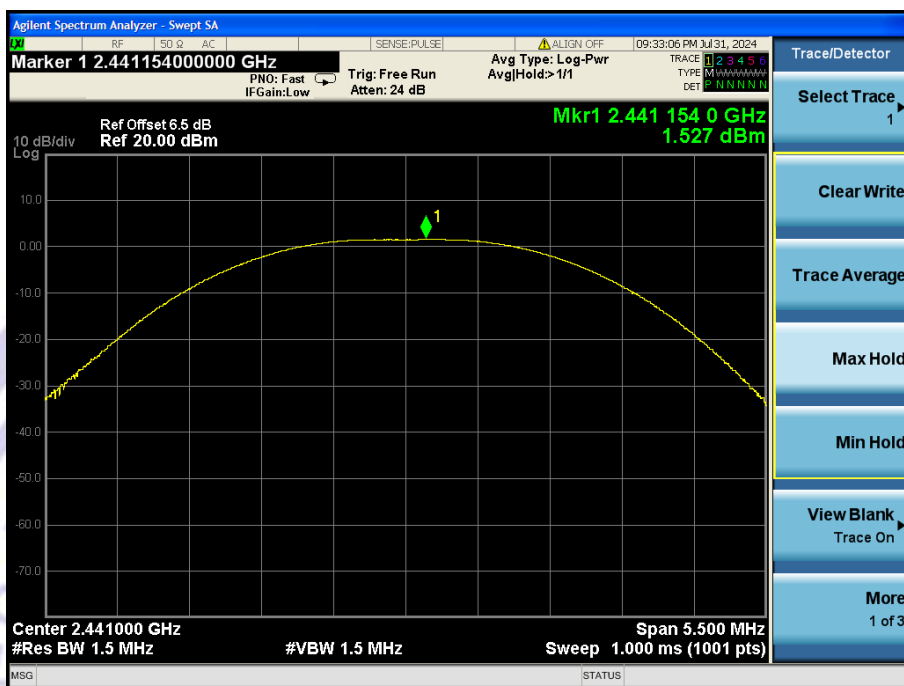


GFSK High Channel

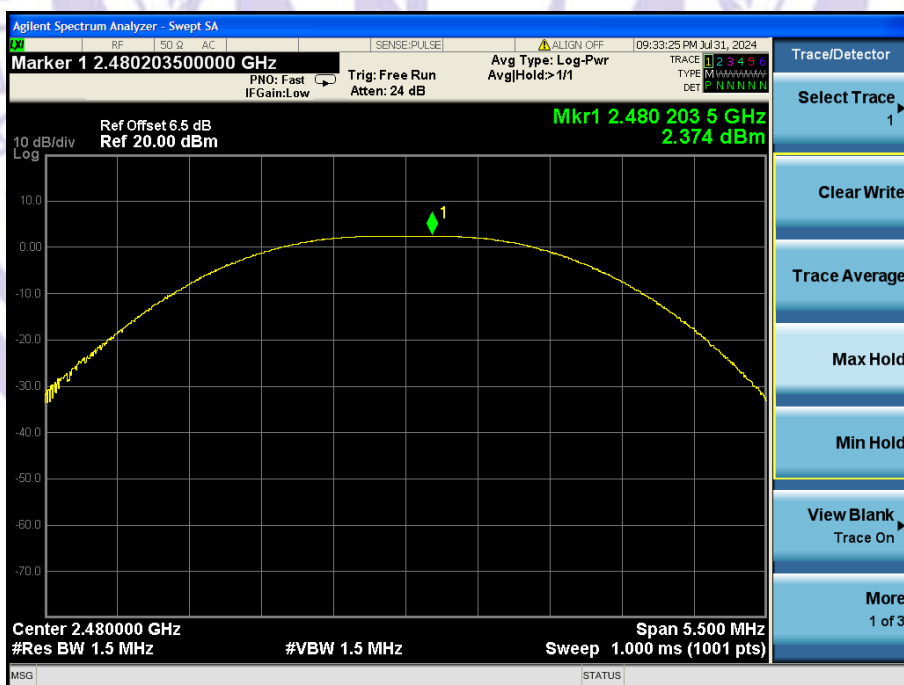


$\pi/4$ -DQPSK Low Channel

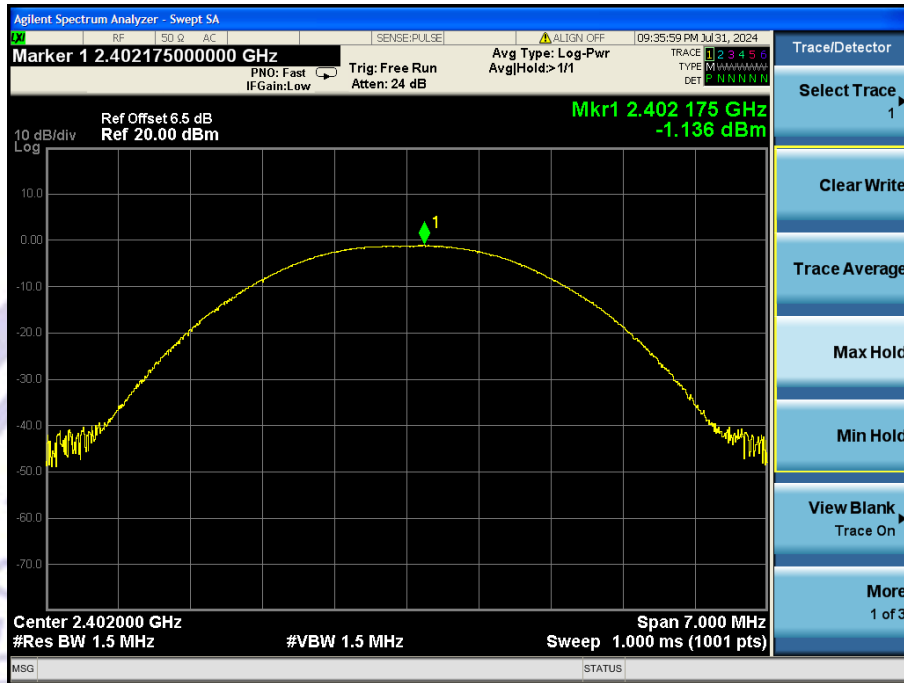


$\pi/4$ -DQPSK Middle Channel

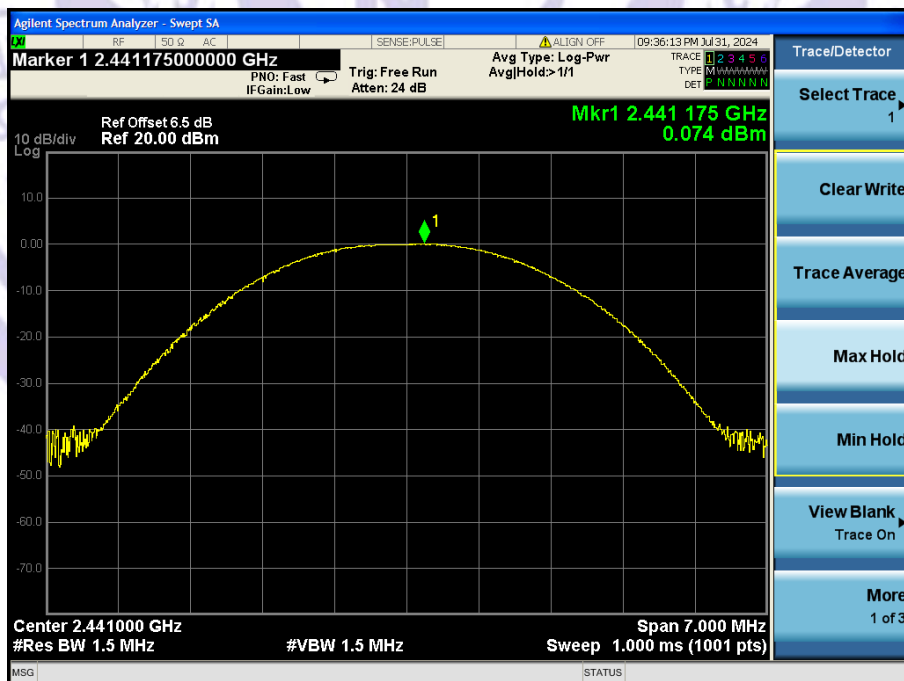


$\pi/4$ -DQPSK High Channel

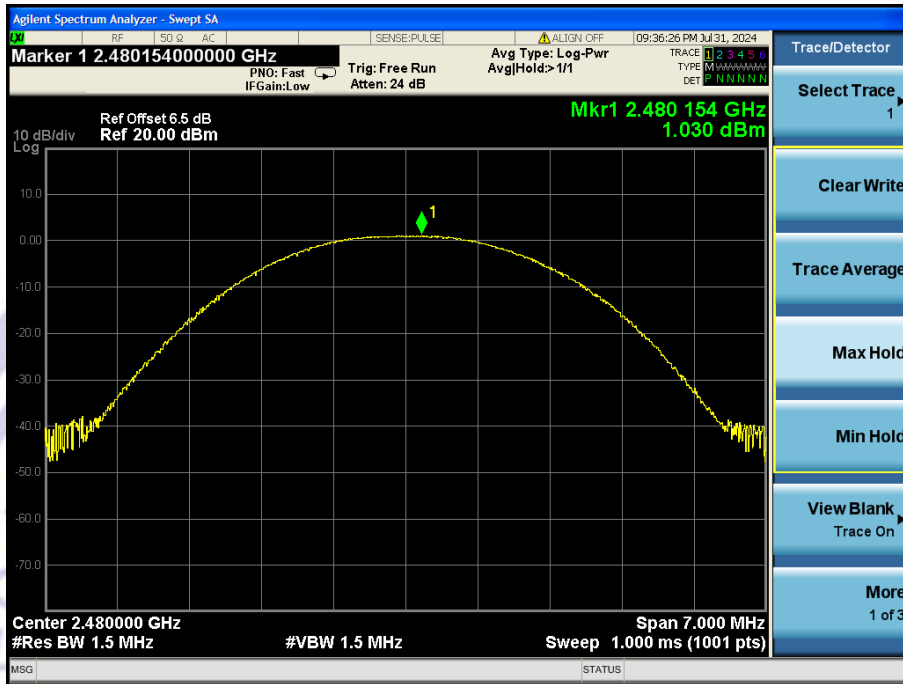


8-DPSK Low Channel

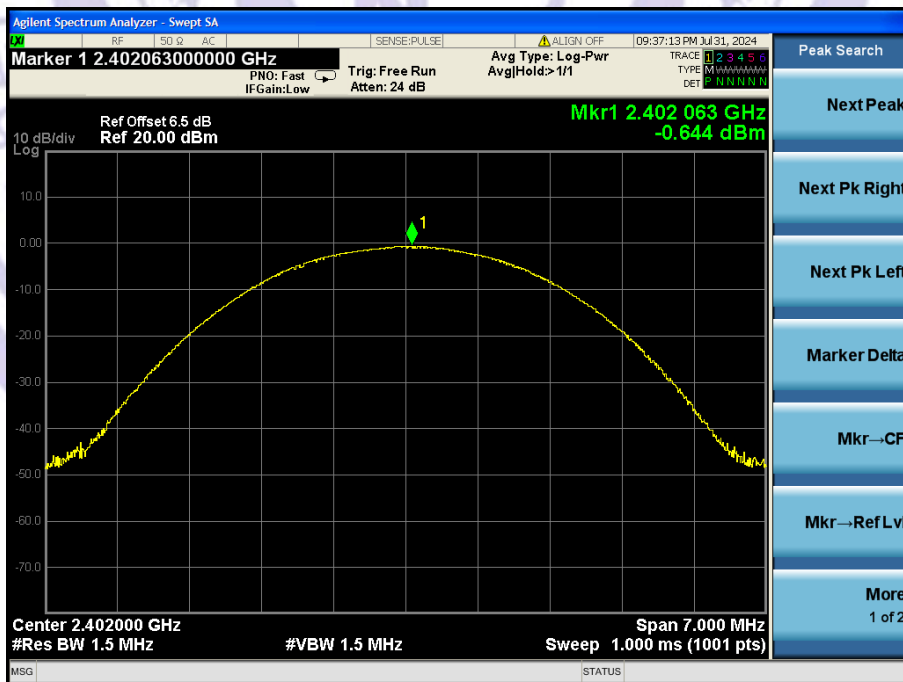

8-DPSK Middle Channel

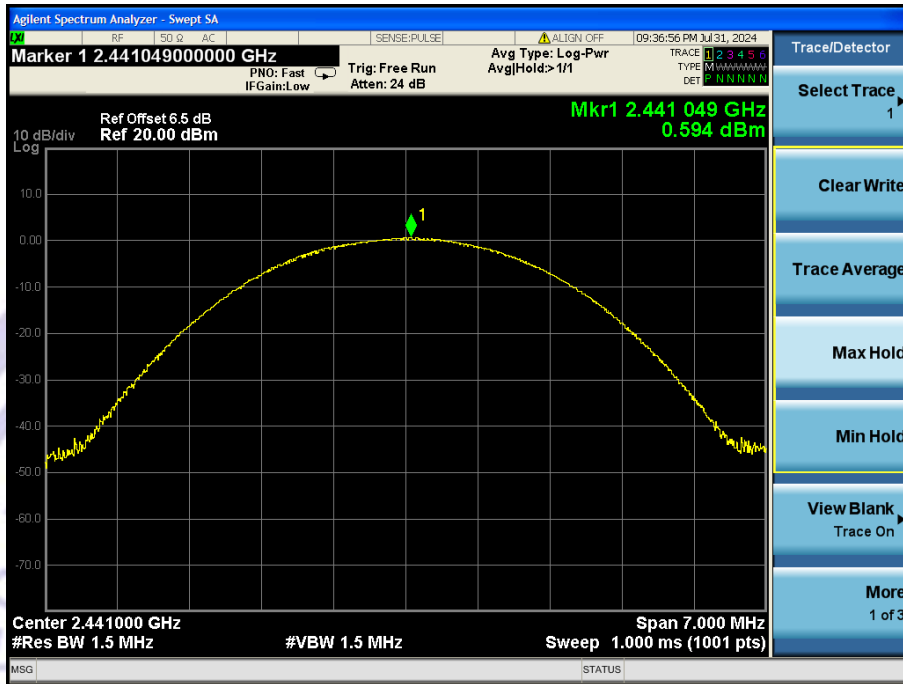

8-DPSK High Channel

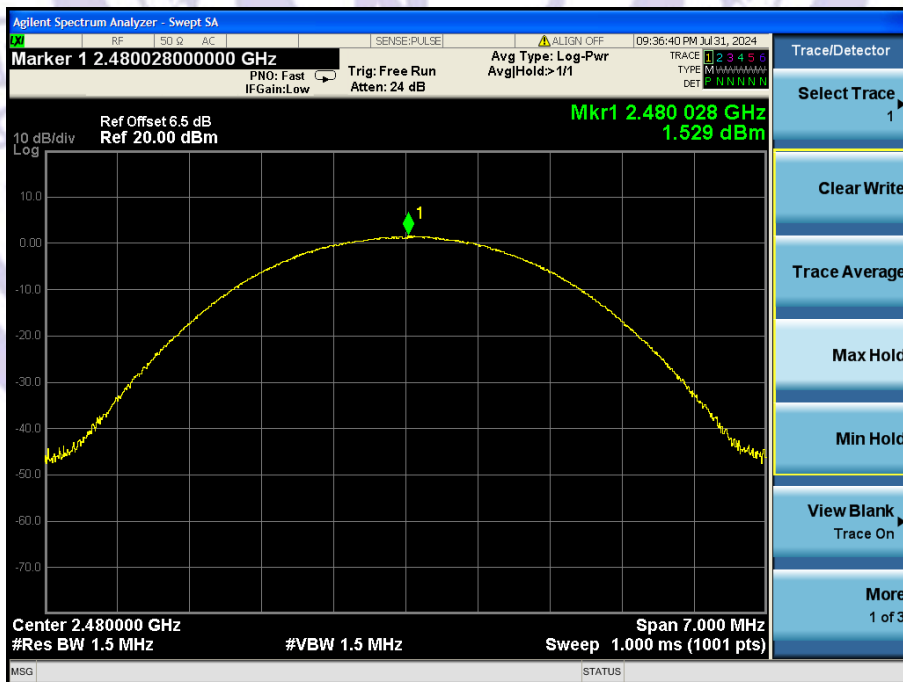


9 20DB Occupy Bandwidth Test(For FHSS)

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

9.2 Test Setup



9.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4 Test Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	1.022	Pass
	Middle	1.032	
	Highest	1.037	
8-DPSK	Lowest	1.263	Pass
	Middle	1.265	
	Highest	1.266	


Test plots
GFSK Low Channel



GFSK Middle Channel



GFSK High Channel

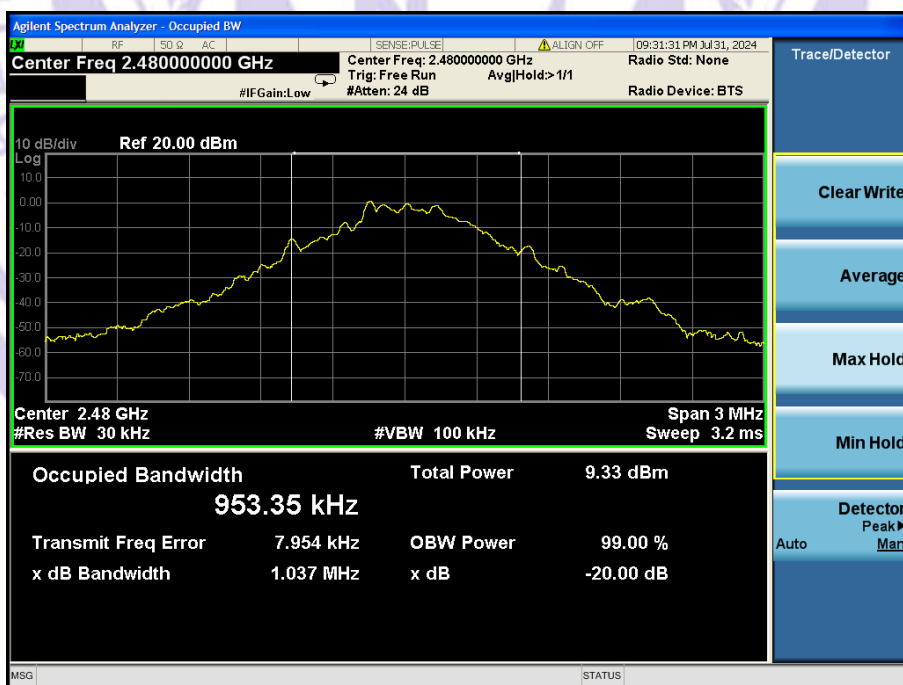


8-DPSK Low Channel



8-DPSK Middle Channel



8-DPSK High Channel

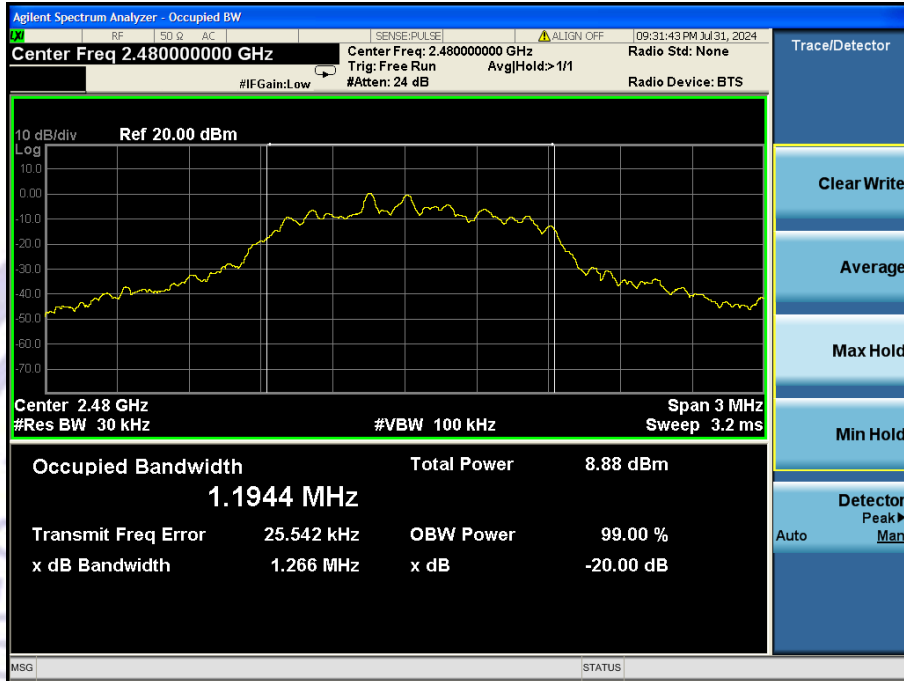


10 Carrier Frequency Separation Test(For FHSS)

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure


The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 300 kHz.
3. Set the VBW = 1 MHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


10.4 Test Data

Mode	Test channel	Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	Low	1.002	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1.002		Pass
	High	1.002		Pass
8-DPSK	Low	1.002	25KHz or 2/3*20dB bandwidth	Pass
	Middle	1.002		Pass
	High	1.002		Pass


Test plots
GFSK Low Channel

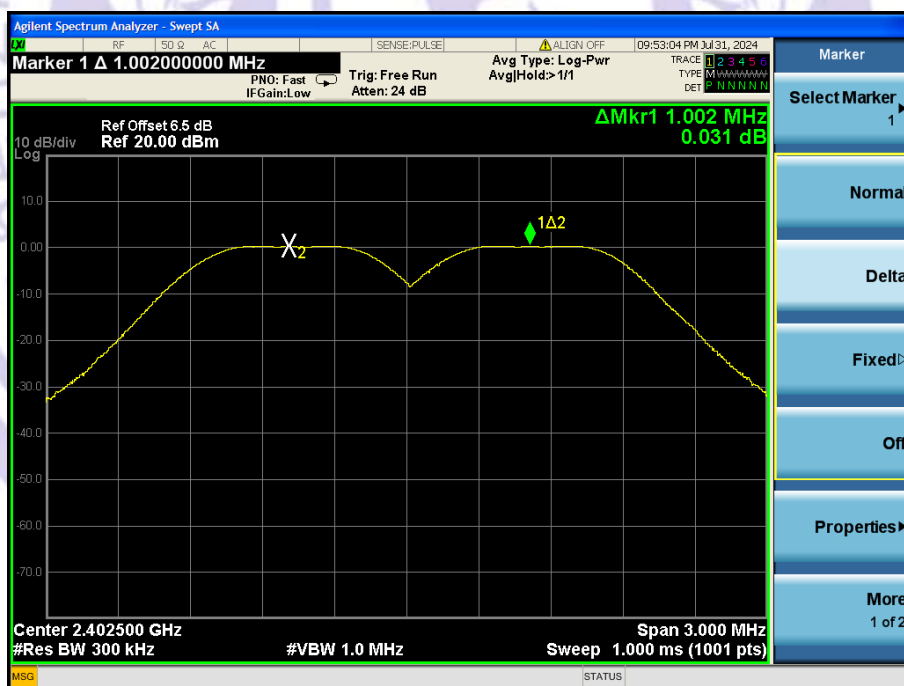

GFSK Middle Channel

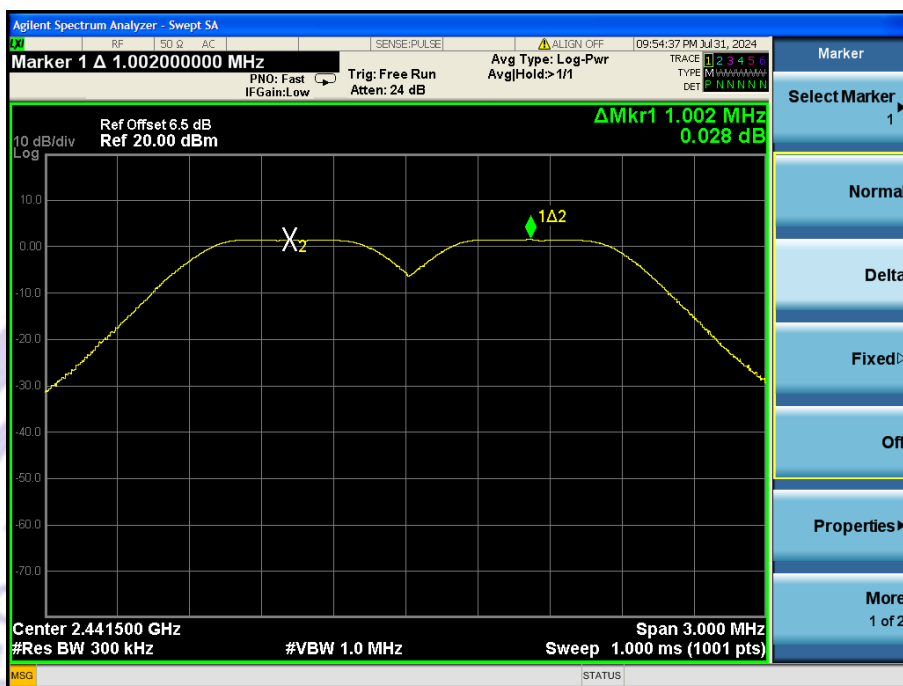


GFSK High Channel

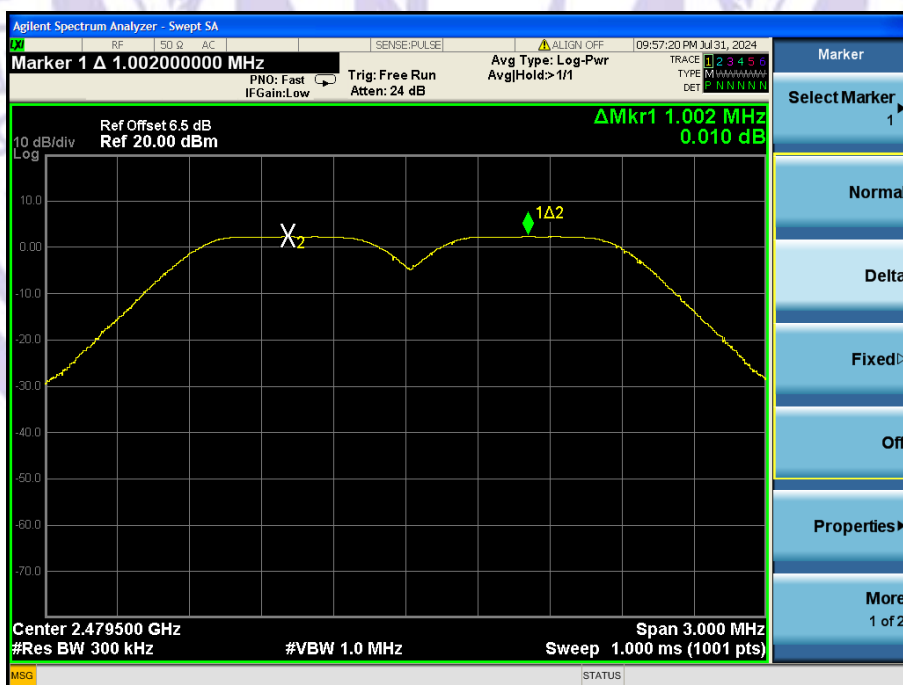


8-DPSK Low Channel



8-DPSK Middle Channel

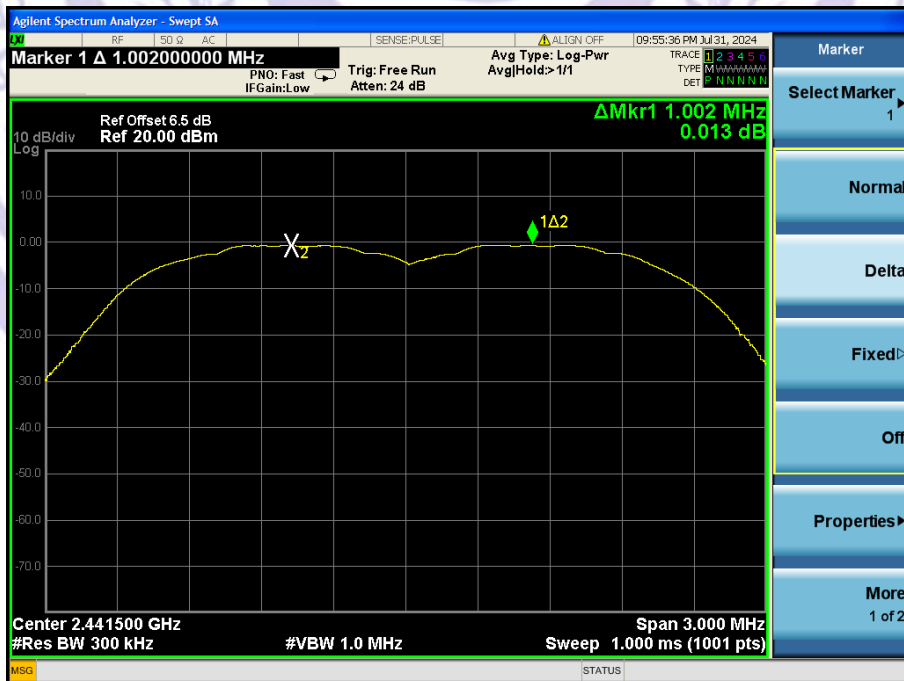

8-DPSK High Channel

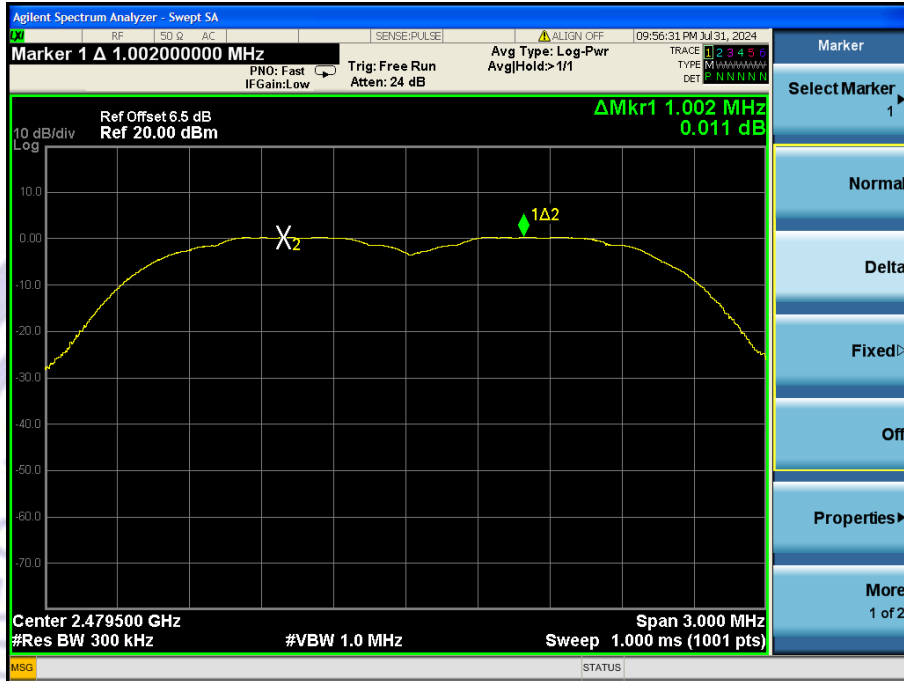


11 Number of Hopping Channel Test(For FHSS)

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure



The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 300kHz.
3. Set the VBW = 1MHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



11.4 Test Data

Mode	Hopping channel numbers	Limit	Result
GFSK	79	≥15	Pass
8-DPSK	79		Pass

Test Plots:
79 Channels in total
GFSK

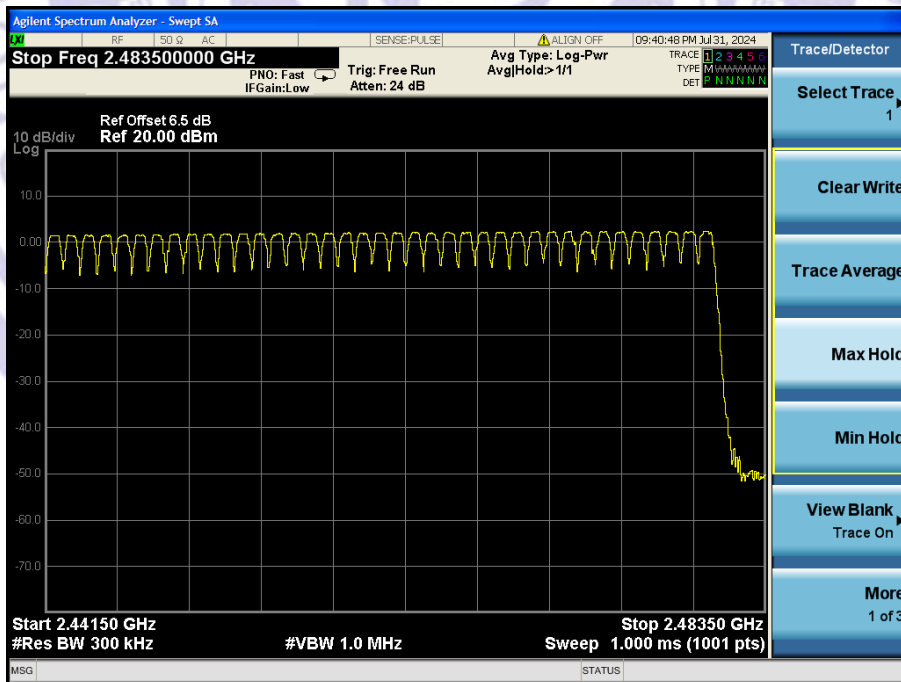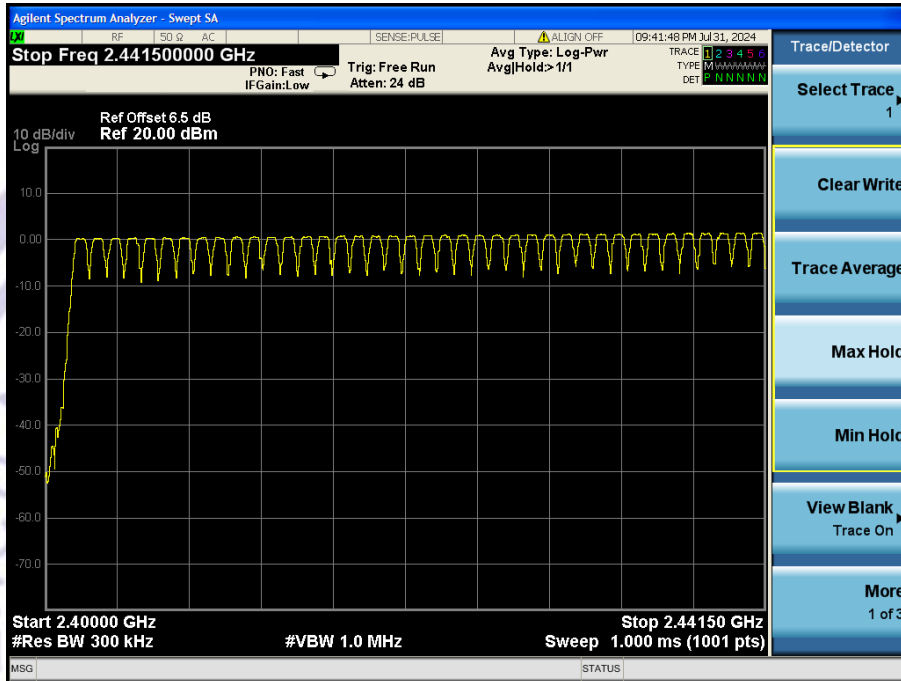

8-DPSK

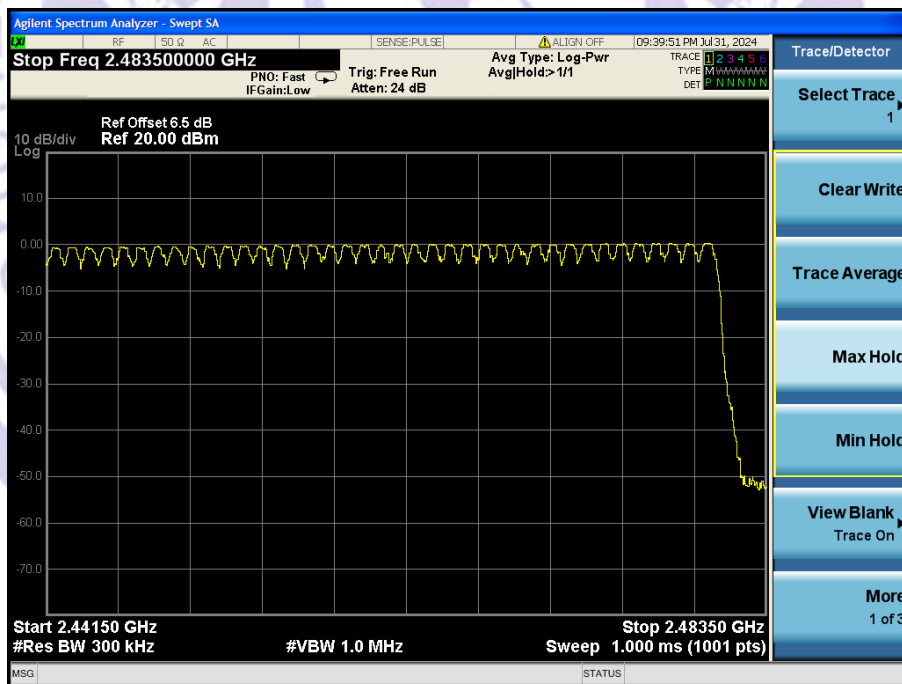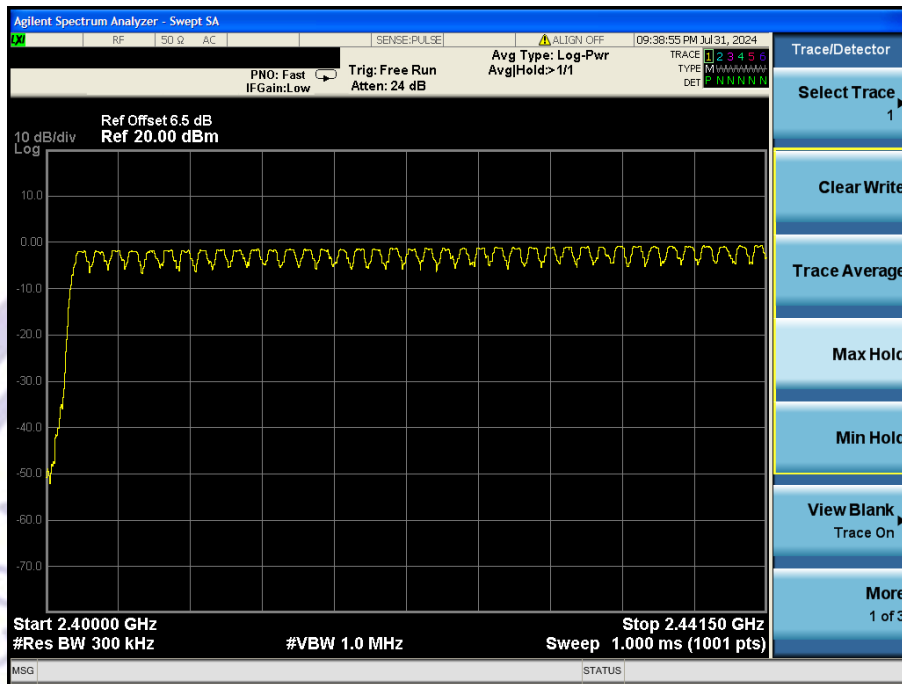


12 Dwell Time Test(For FHSS)

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

12.4 Test Data

GFSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.376	120	400	Pass
Hopping	DH3	1.626	260	400	Pass
Hopping	DH5	2.876	307	400	Pass

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.

Dwell time = Pulse time (ms) × (1600 ÷ 2 ÷ 79) × 31.6 Second for DH1, 3-DH1

Dwell time = Pulse time (ms) × (1600 ÷ 4 ÷ 79) × 31.6 Second for DH3, 3-DH3

Dwell time = Pulse time (ms) × (1600 ÷ 6 ÷ 79) × 31.6 Second for DH5, 3-DH5

8-DPSK mode:

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	3DH1	0.382	122	400	Pass
Hopping	3DH3	1.634	261	400	Pass
Hopping	3DH5	2.888	308	400	Pass

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.


Dwell time = Pulse time (ms) × (1600 ÷ 2 ÷ 79) × 31.6 Second for DH1, 3-DH1

Dwell time = Pulse time (ms) × (1600 ÷ 4 ÷ 79) × 31.6 Second for DH3, 3-DH3


Dwell time = Pulse time (ms) × (1600 ÷ 6 ÷ 79) × 31.6 Second for DH5, 3-DH5

Test Plots


GFSK DH1 2402MHz

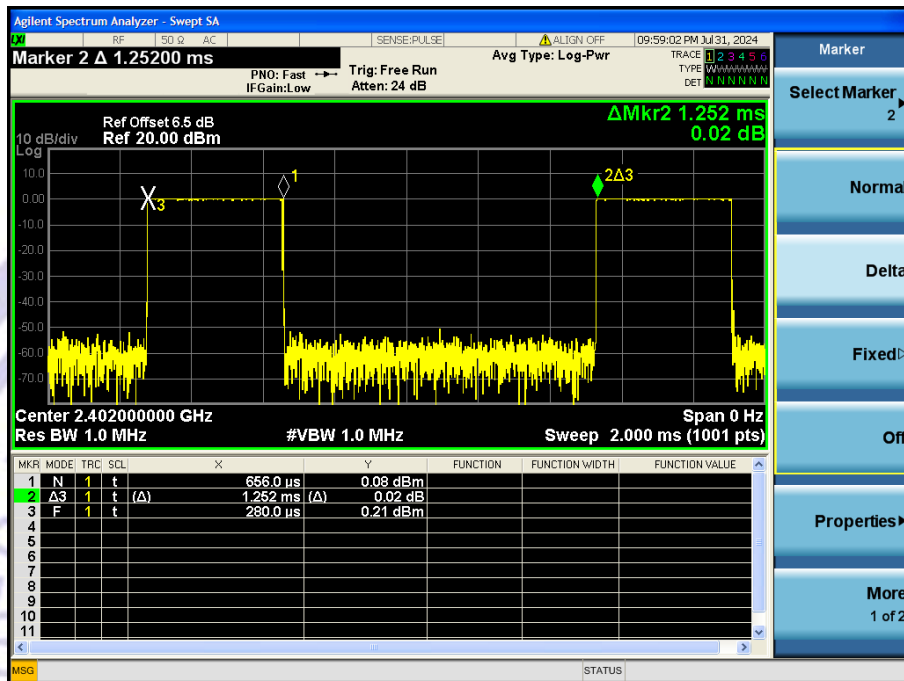


GFSK DH3 2402MHz

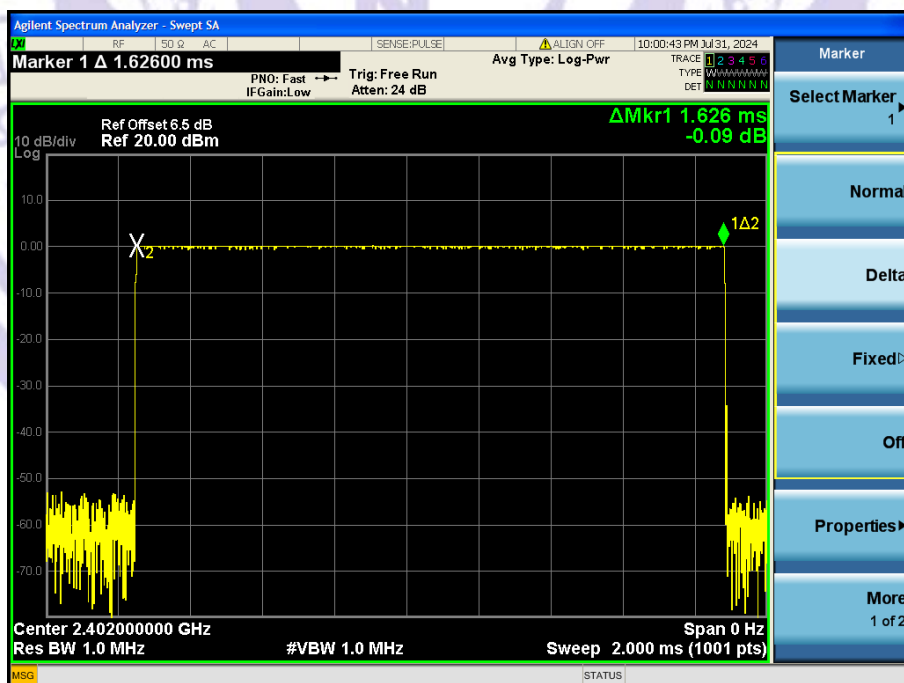


GFSK DH5 2402MHz

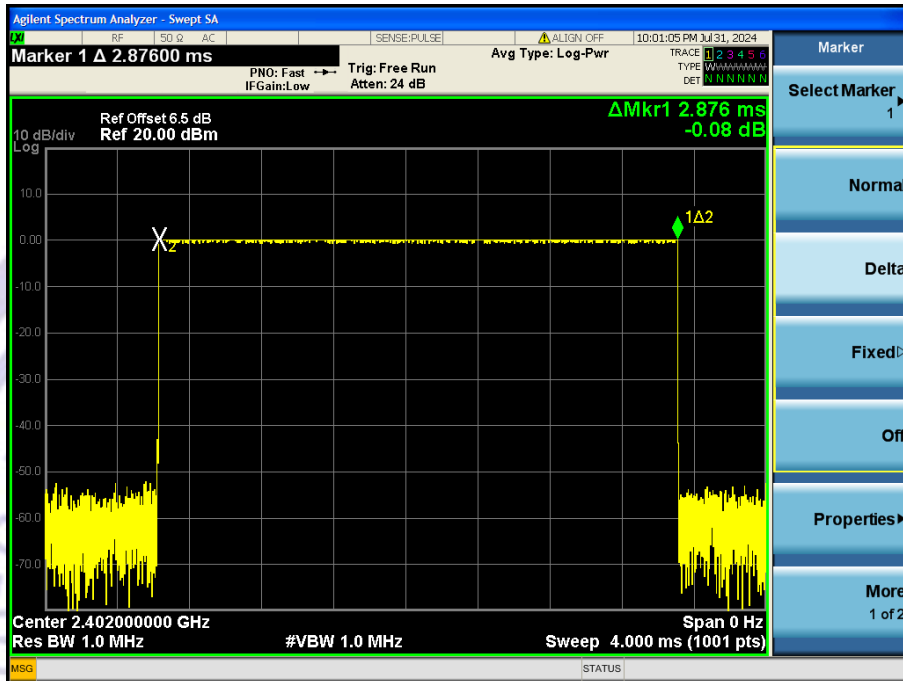


8-DPSK 3DH1 2402MHz

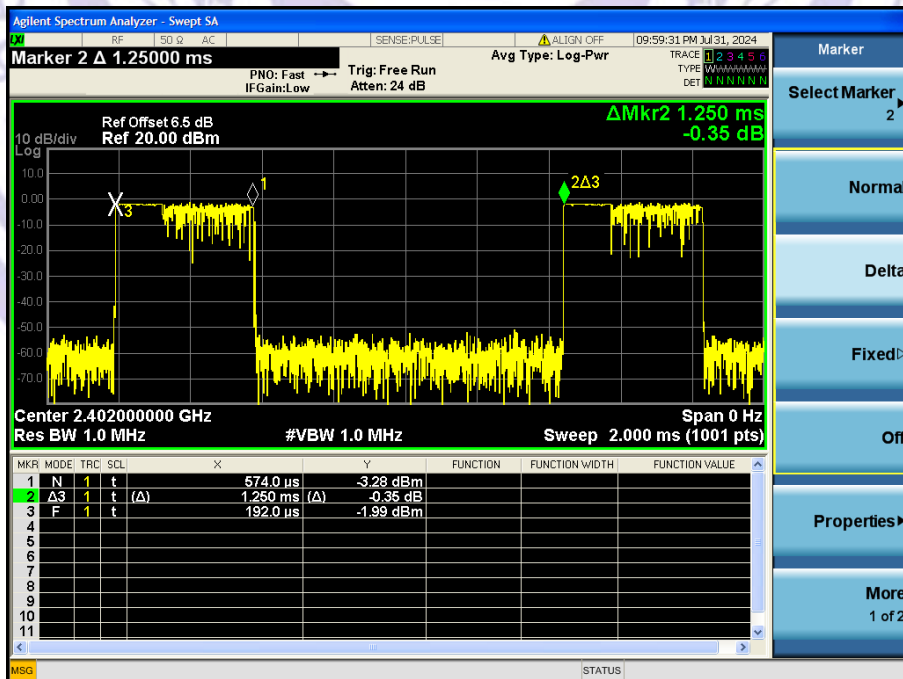

8-DPSK 3DH3 2402MHz

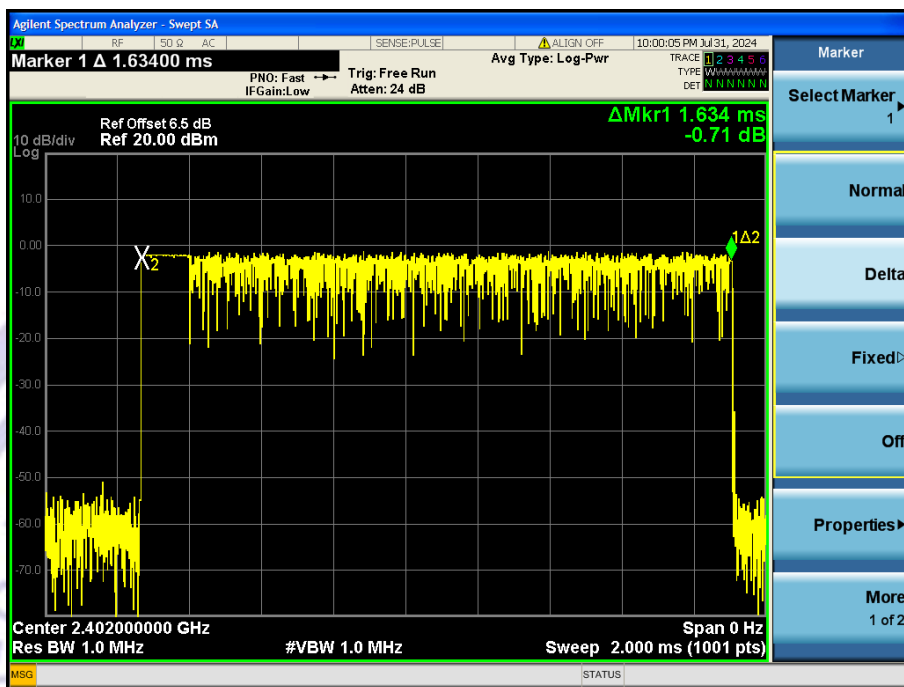

8-DPSK 3DH5 2402MHz

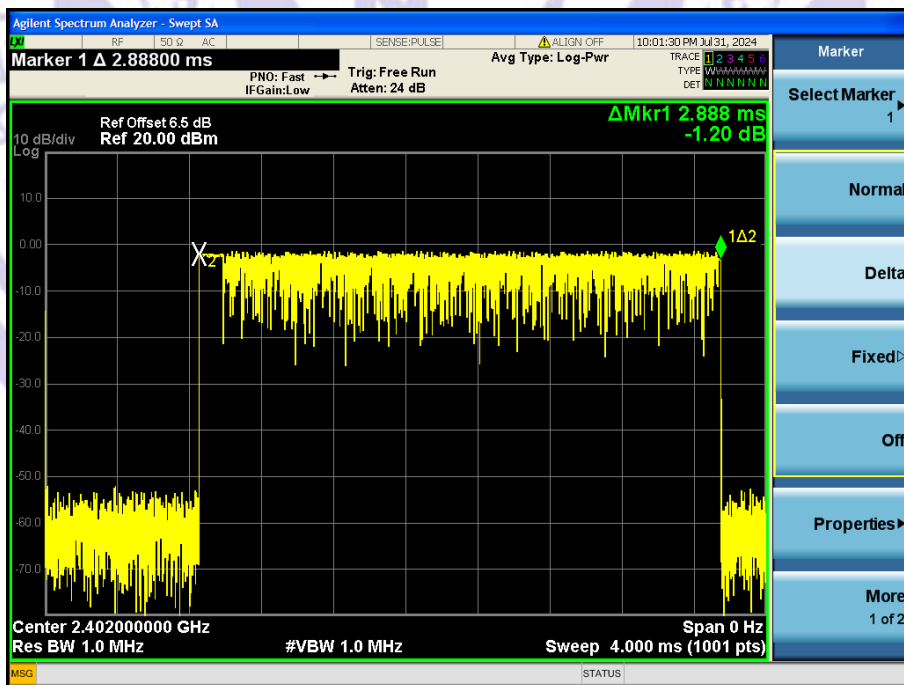


13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup



13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:


1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

13.4 Test Data


BT

GFSK mode:


Data rate 1Mbps

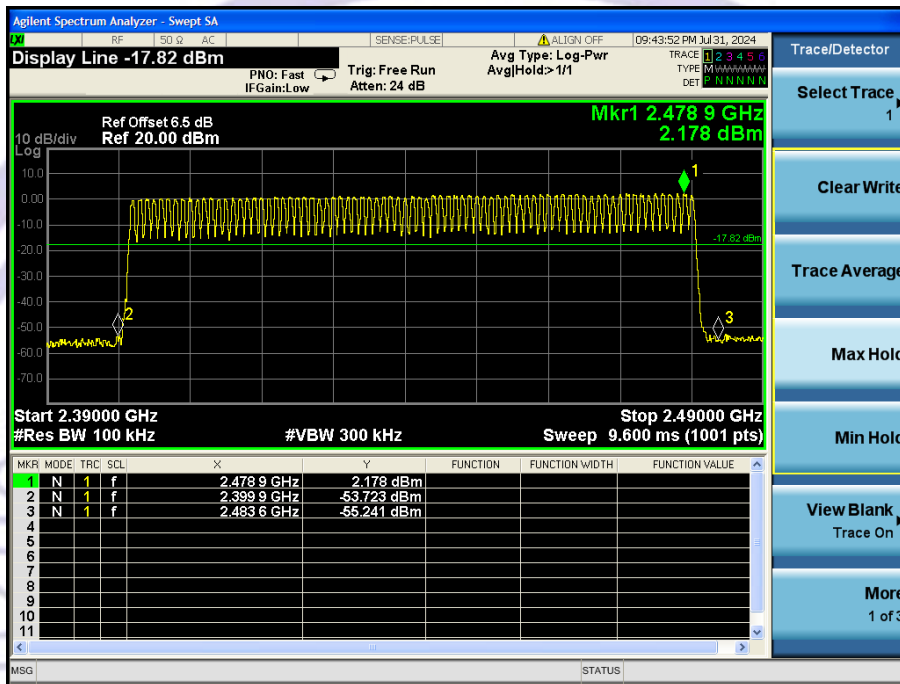


CH00 (Lower) Data rate 1Mbps

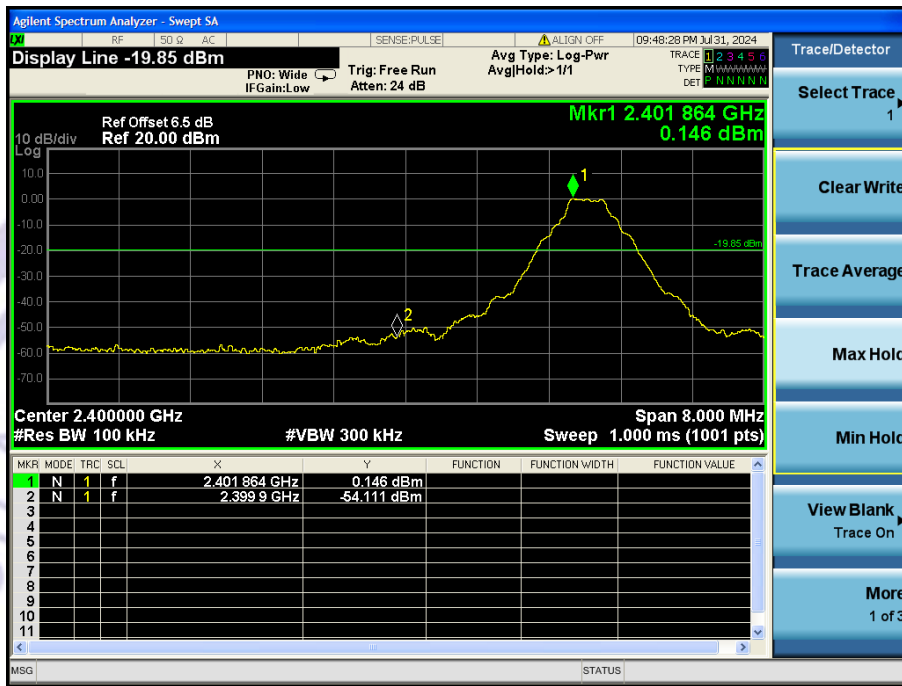


CH 78 (Upper) Data rate 1Mbps

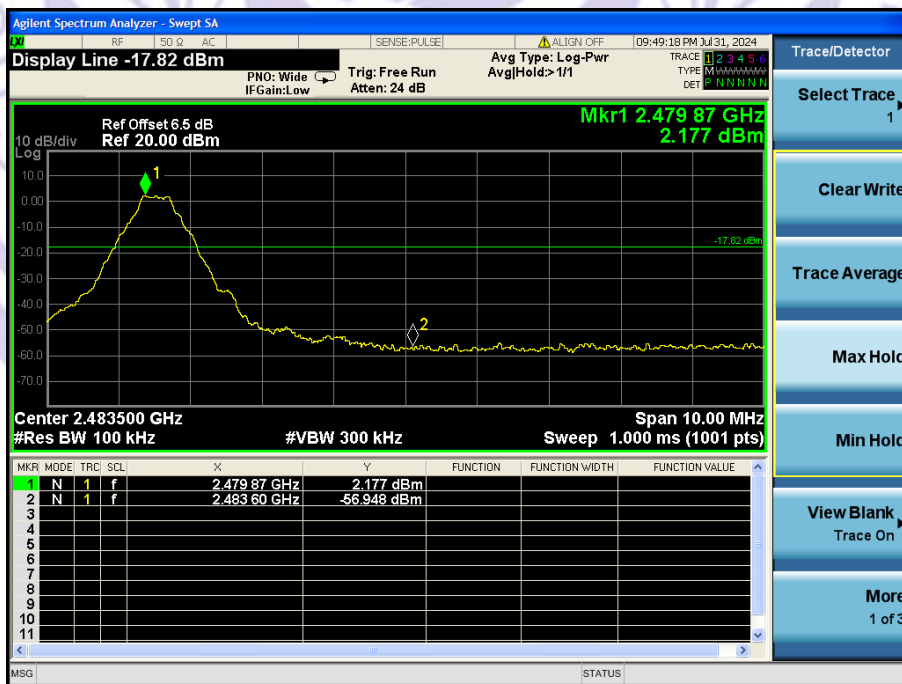


CH01

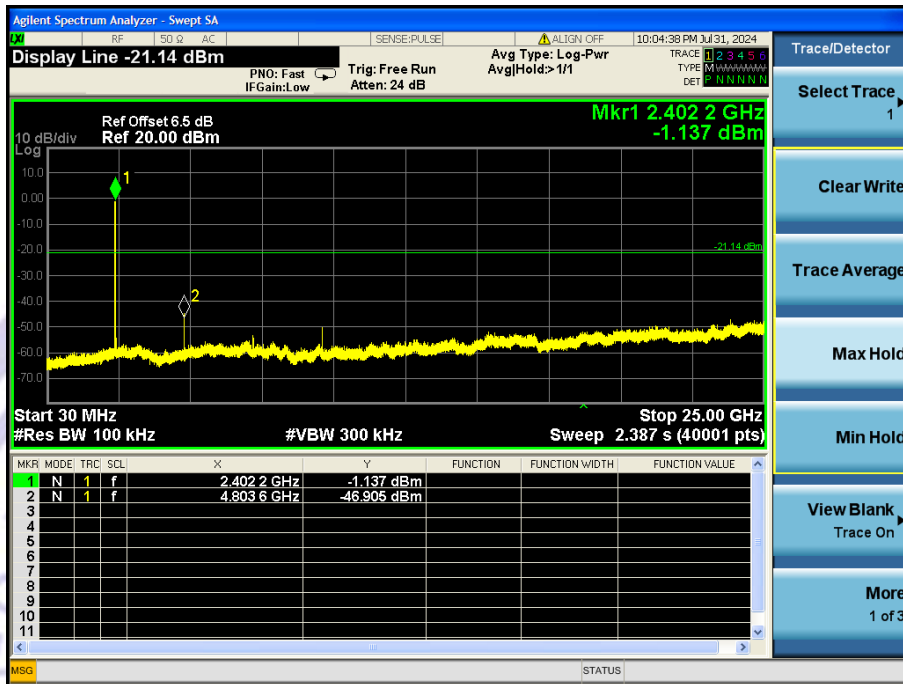

CH39


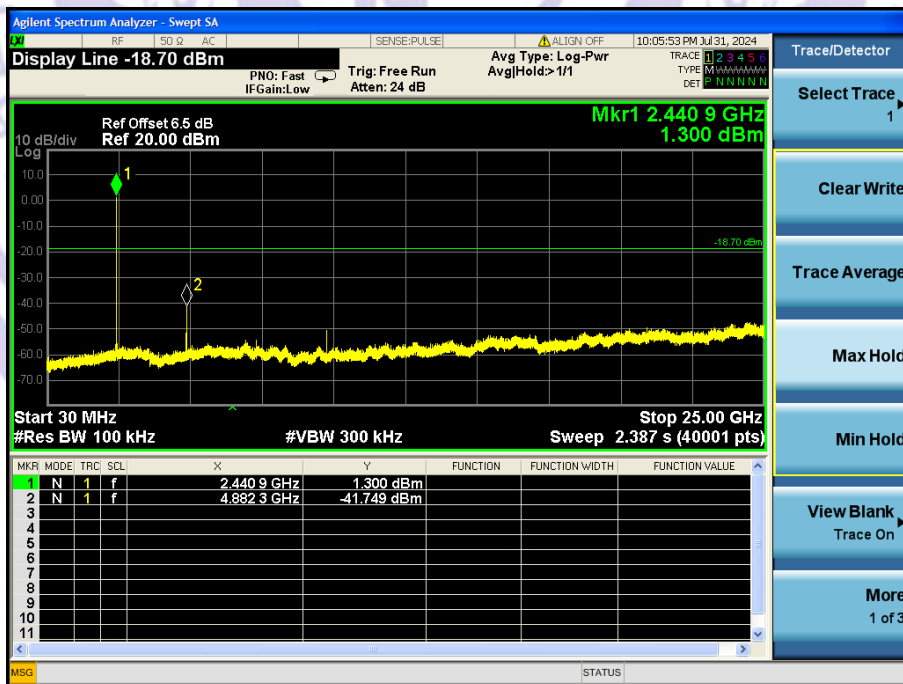


CH78

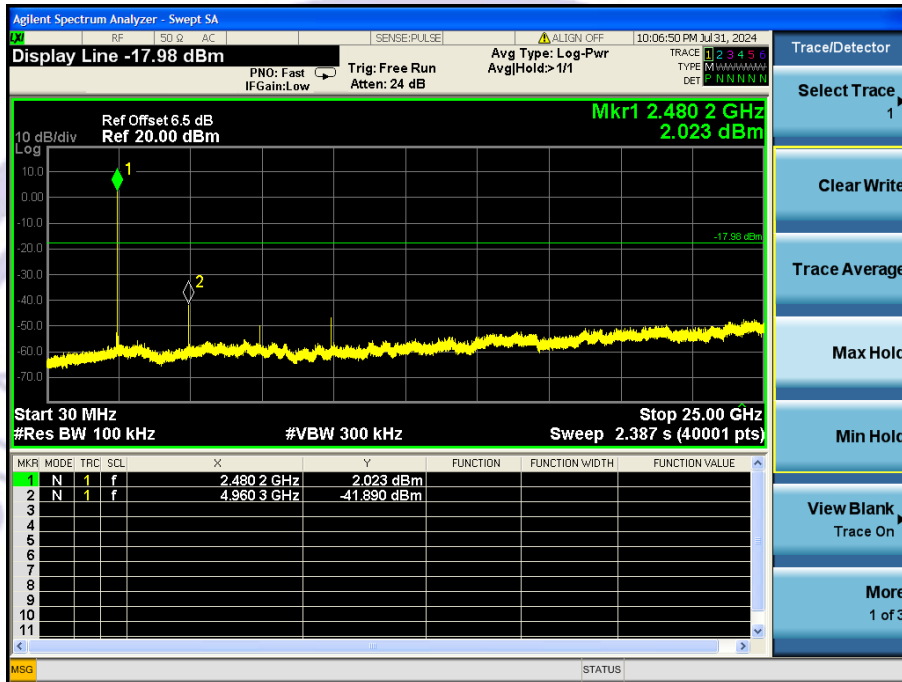


8-DPSK mode


Data rate 3Mbps

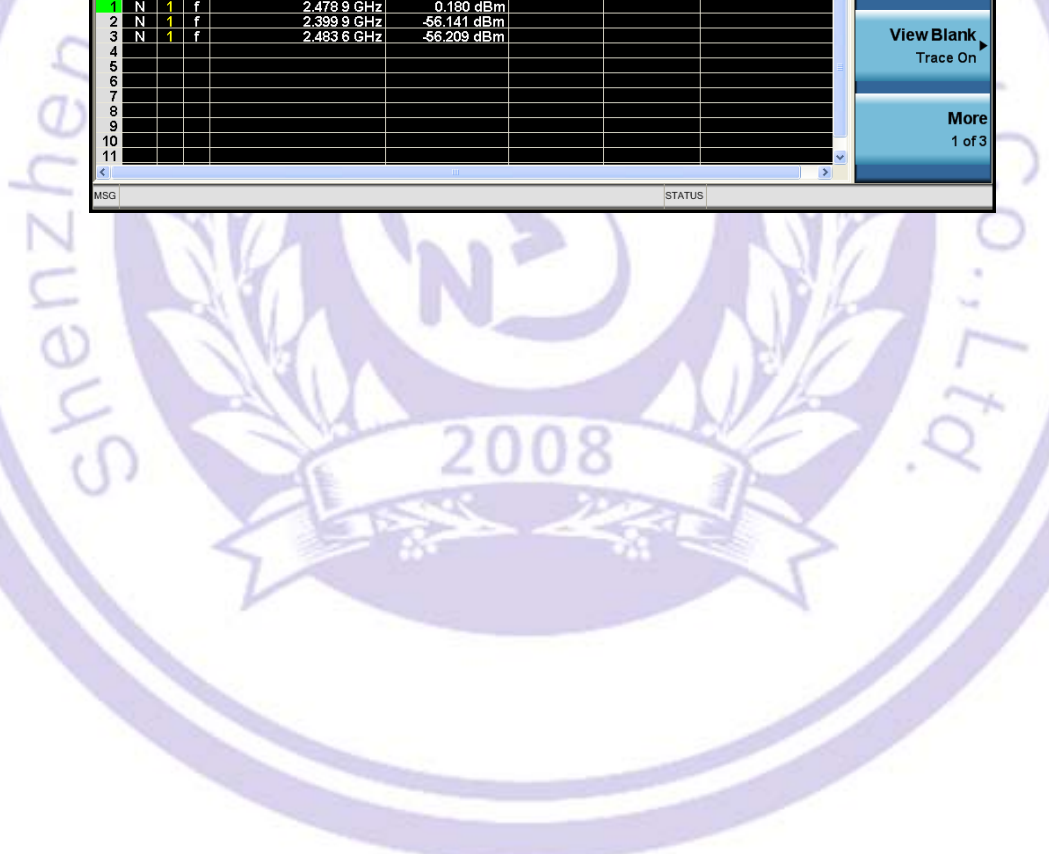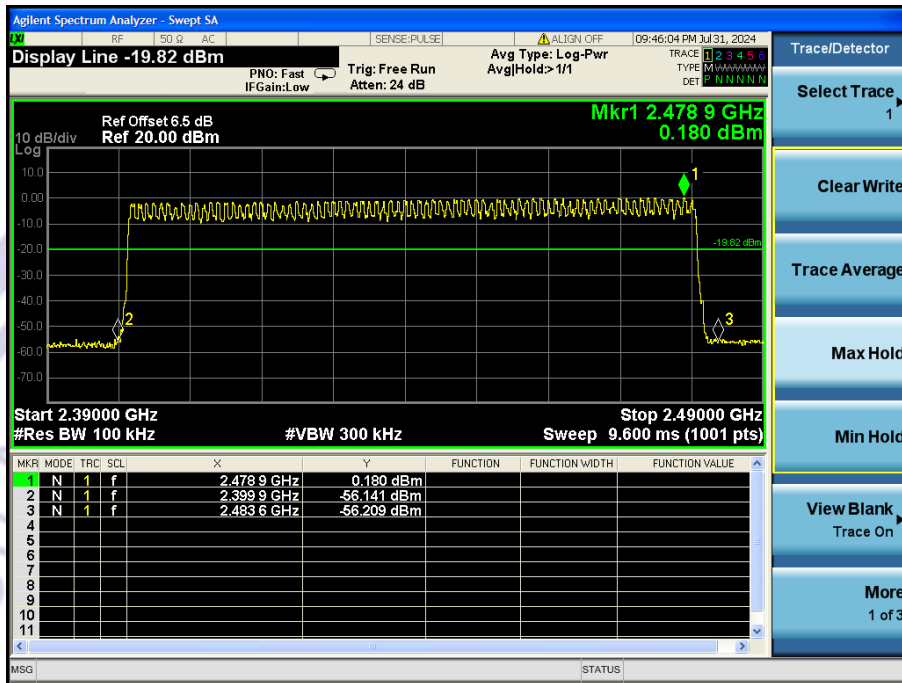


CH00 (Lower) Data rate 3Mbps

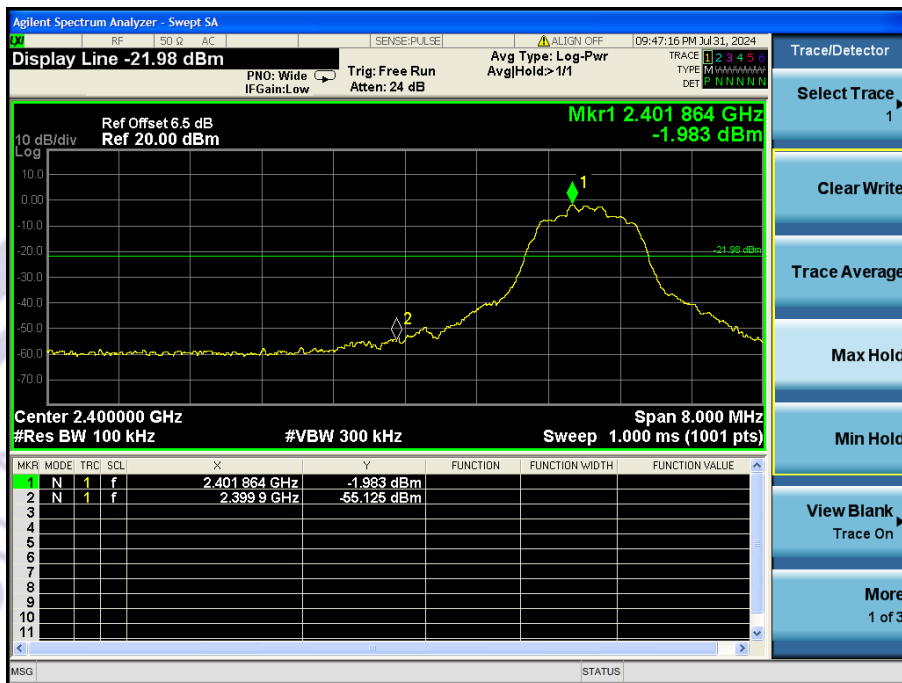


CH 78 (Upper) Data rate 3Mbps

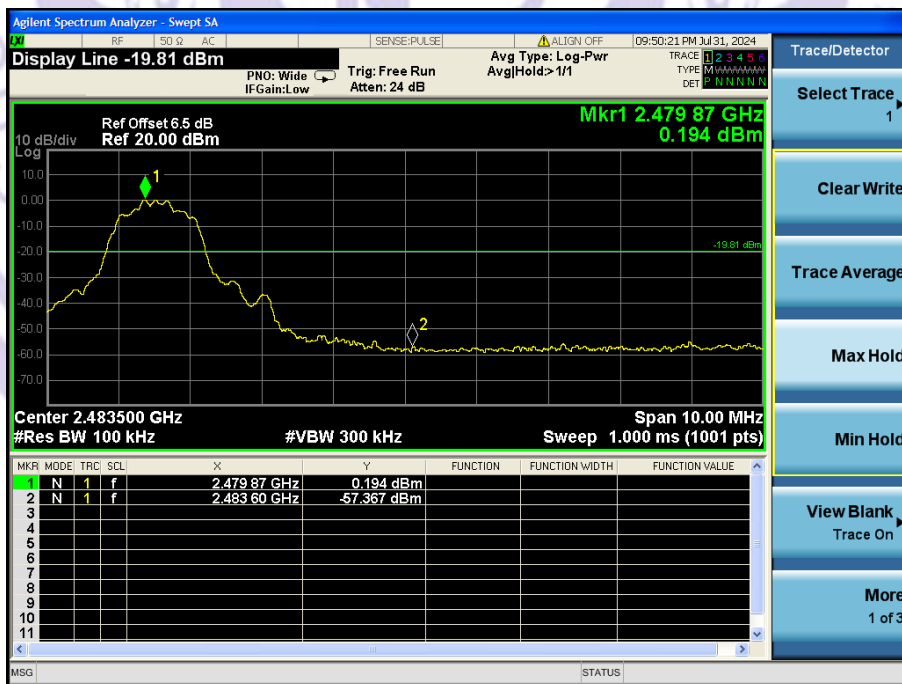


CH01

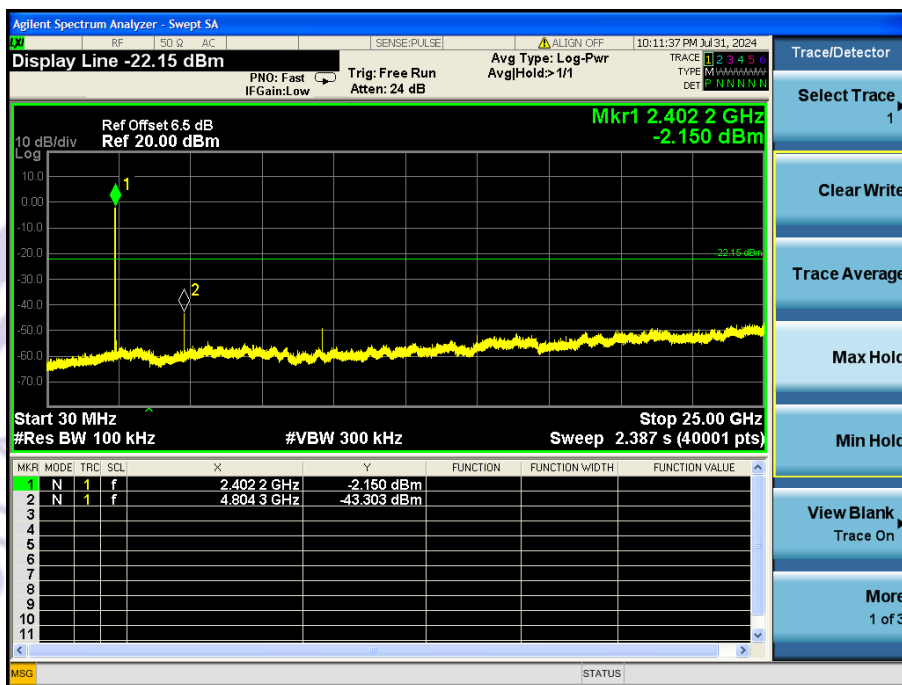


CH39

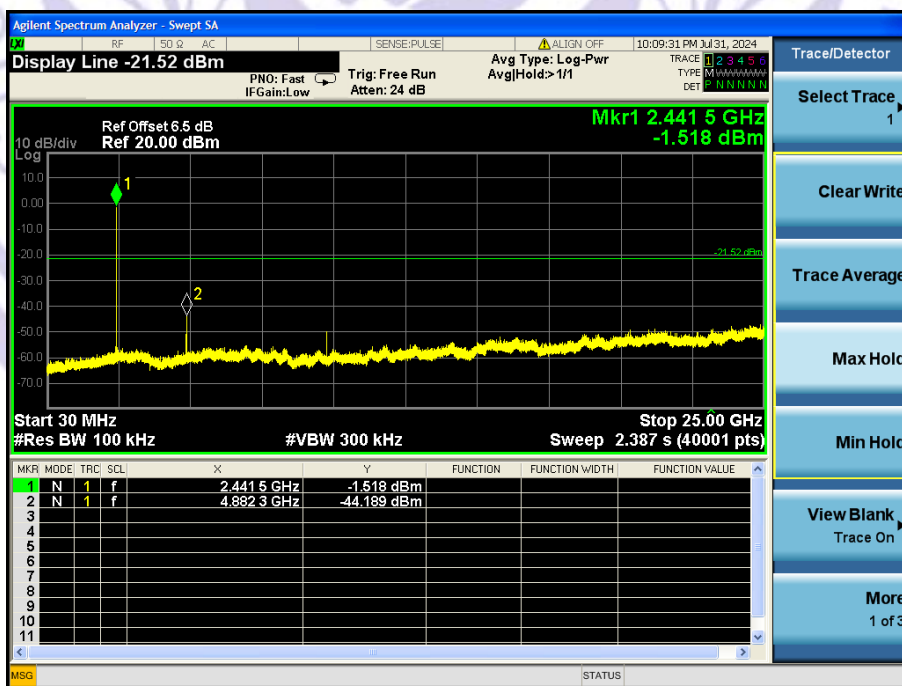


CH78

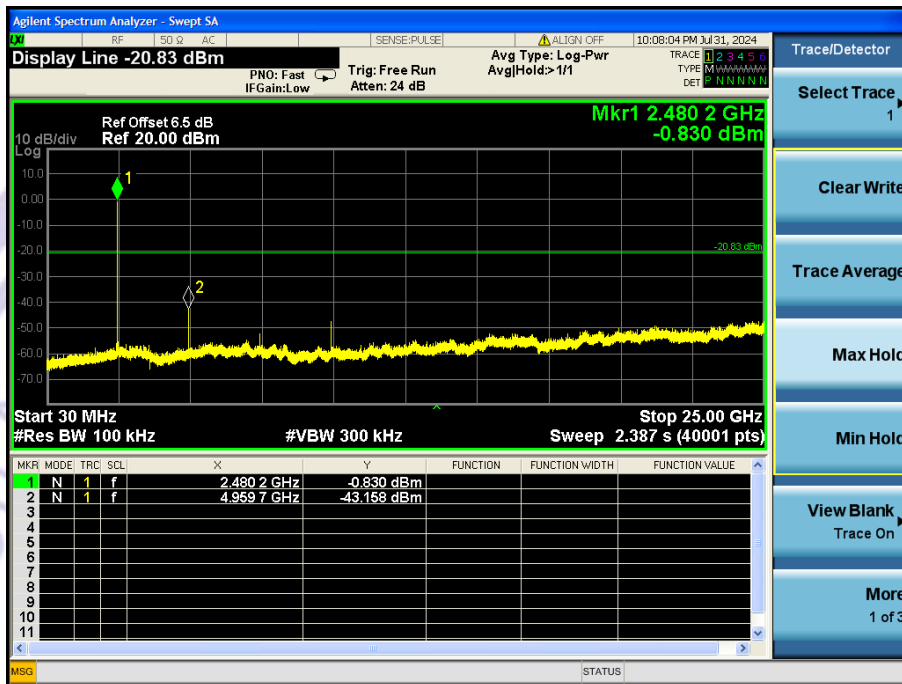


BLE-1M CH00 (Lower)

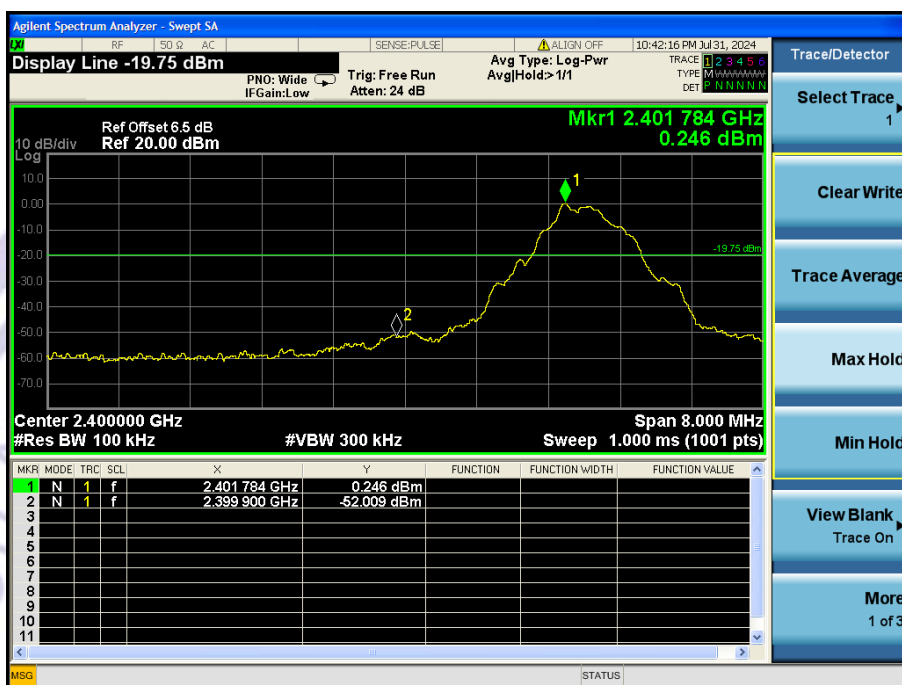


CH 39 (Upper)

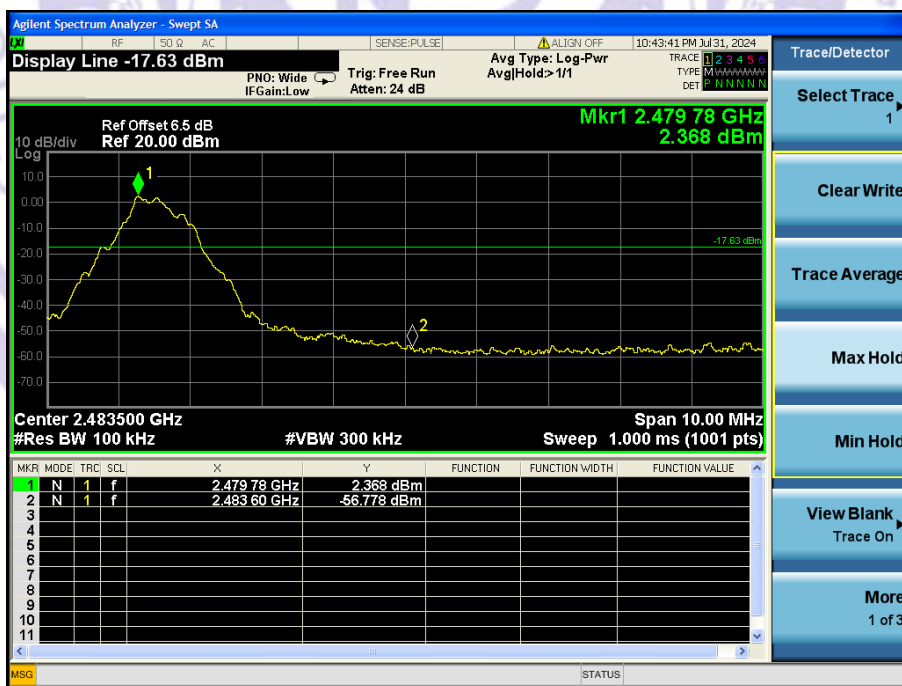



CH00

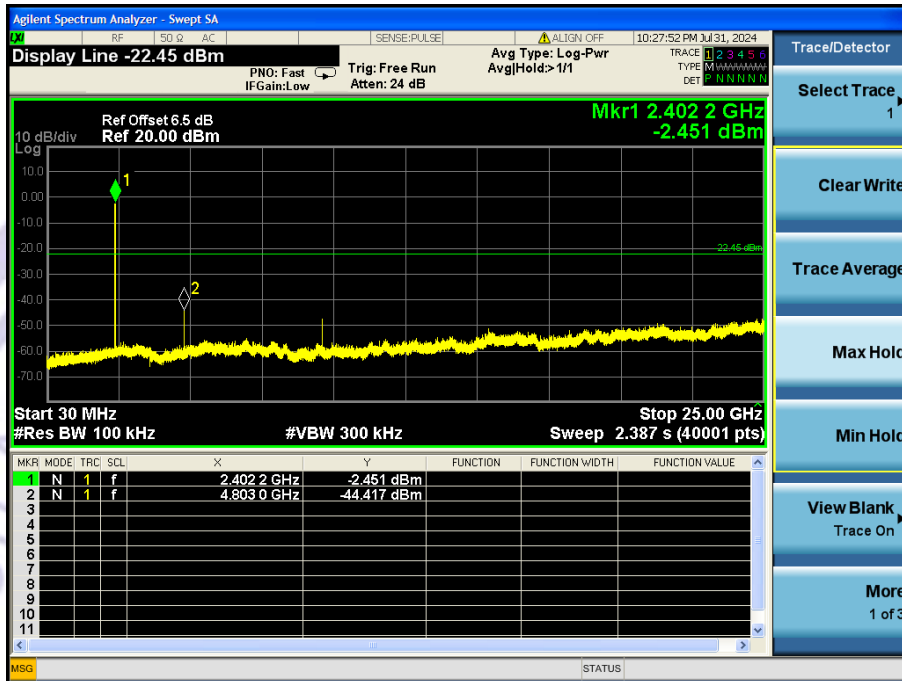

CH19

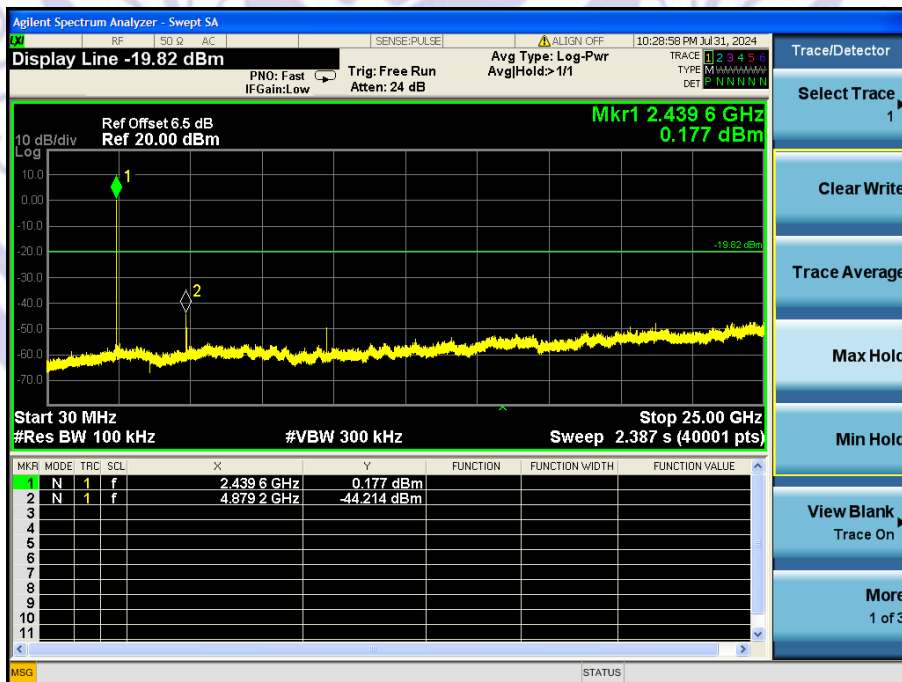

CH39

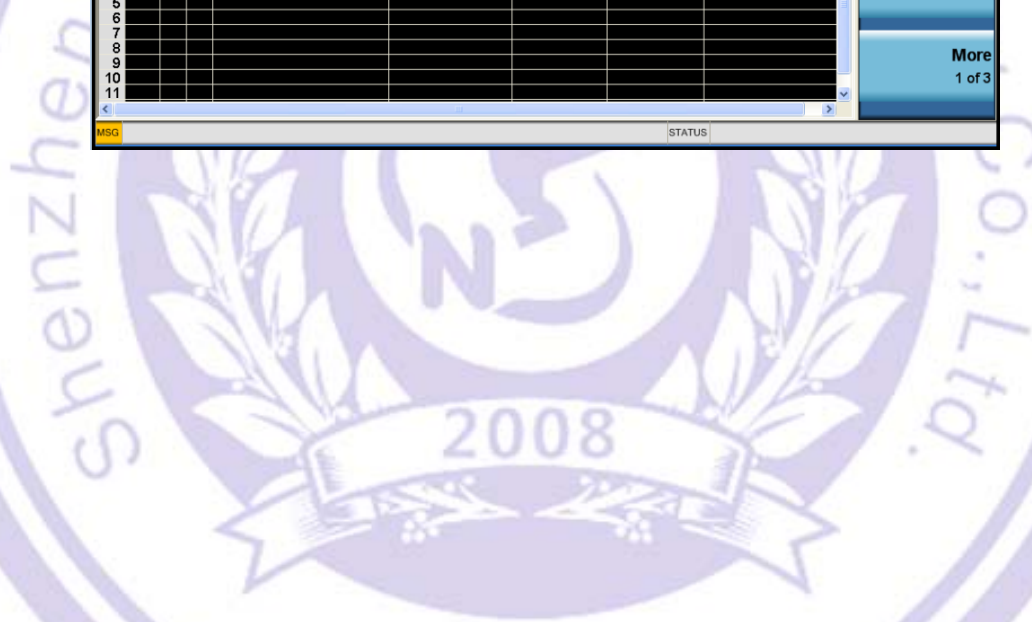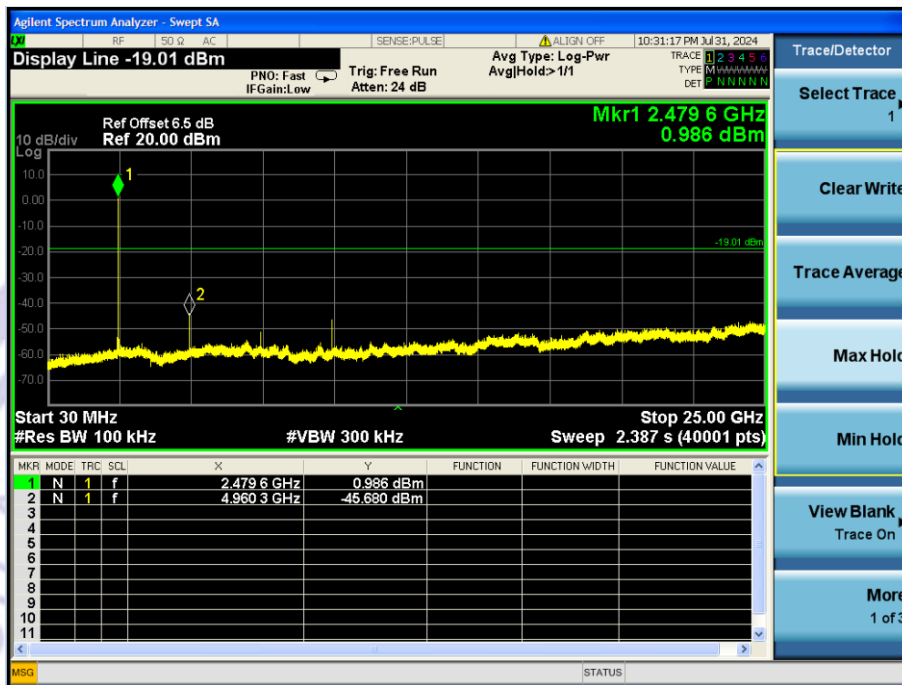


BLE-2M CH00 (Lower)




CH 39 (Upper)




CH00

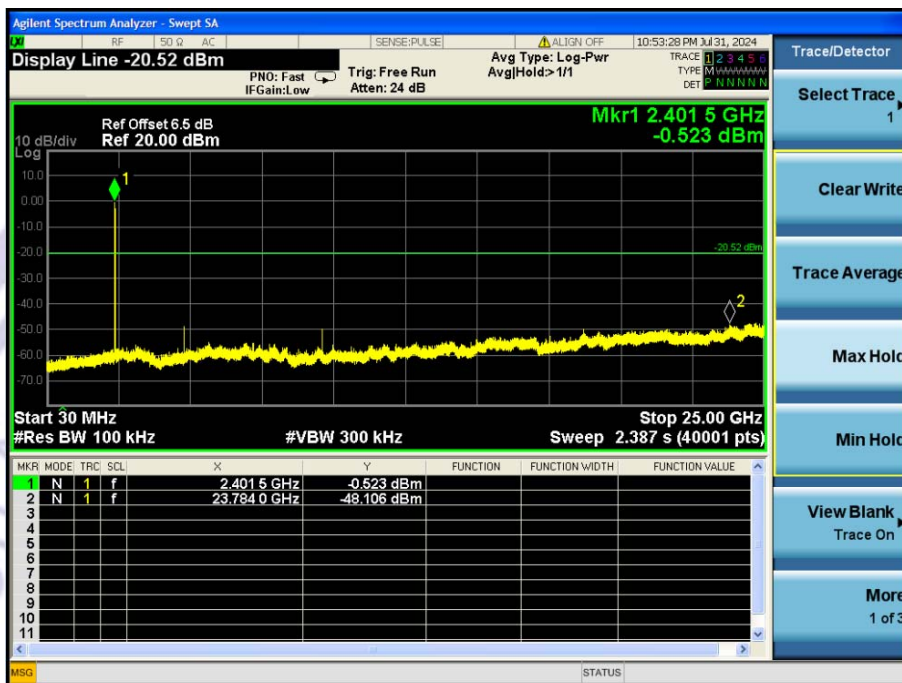

CH19

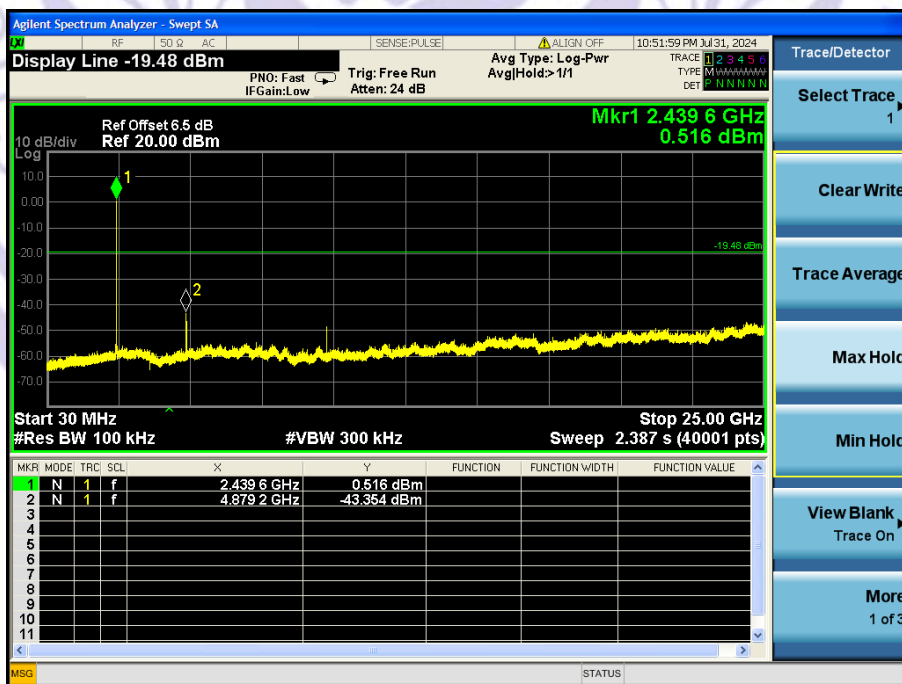

CH39

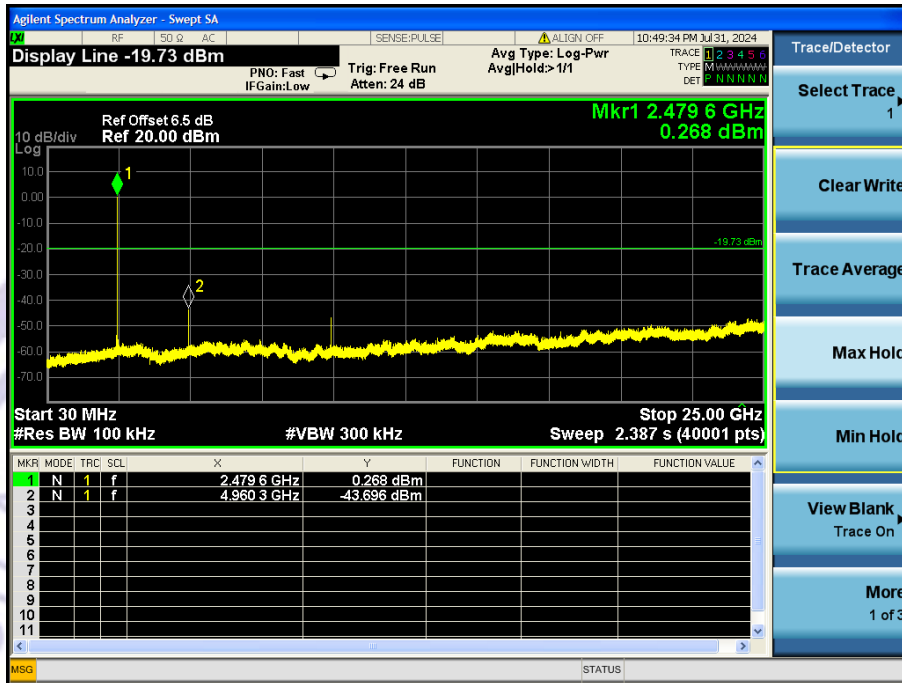

14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

14.2 Antenna Connected Construction

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is 1.2dBi. It complies with the standard requirement.

15 6dB Bandwidth Measurement(For Other than FHSS)

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

15.2 Test Result


1M

Test Mode	Test Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)
Mode 1	CH01	2402	511.3	≧ 500
	CH19	2440	505.0	≧ 500
	CH39	2480	527.5	≧ 500

2M

Test Mode	Test Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)
Mode 1	CH01	2402	875.3	≧ 500
	CH19	2440	865.2	≧ 500
	CH39	2480	850.9	≧ 500

1M-CH00 2402MHz

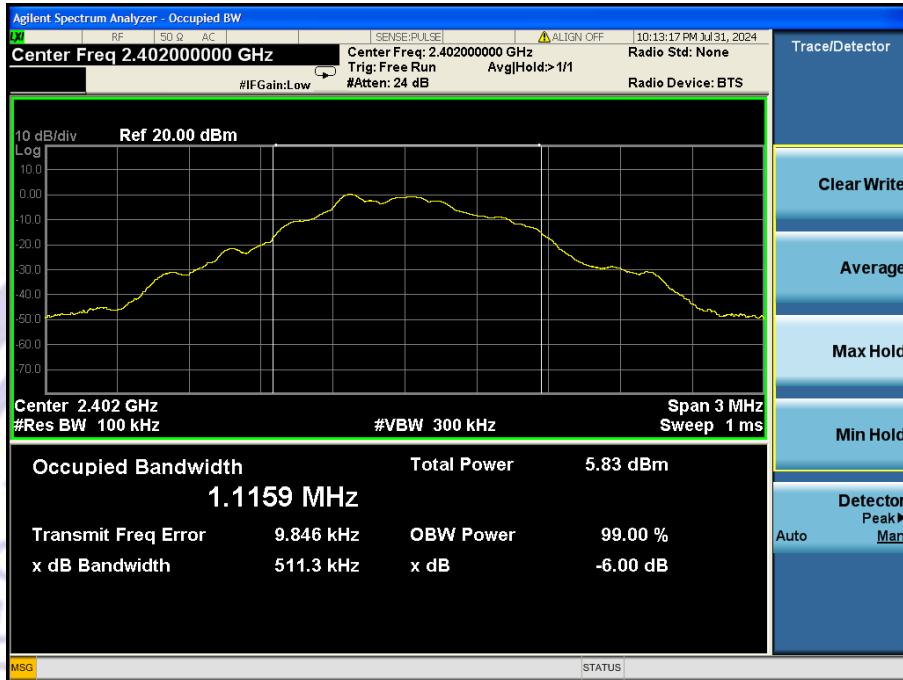


1M-CH19 2440MHz




1M-CH39 2480MHz




2M-CH00 2402MHz

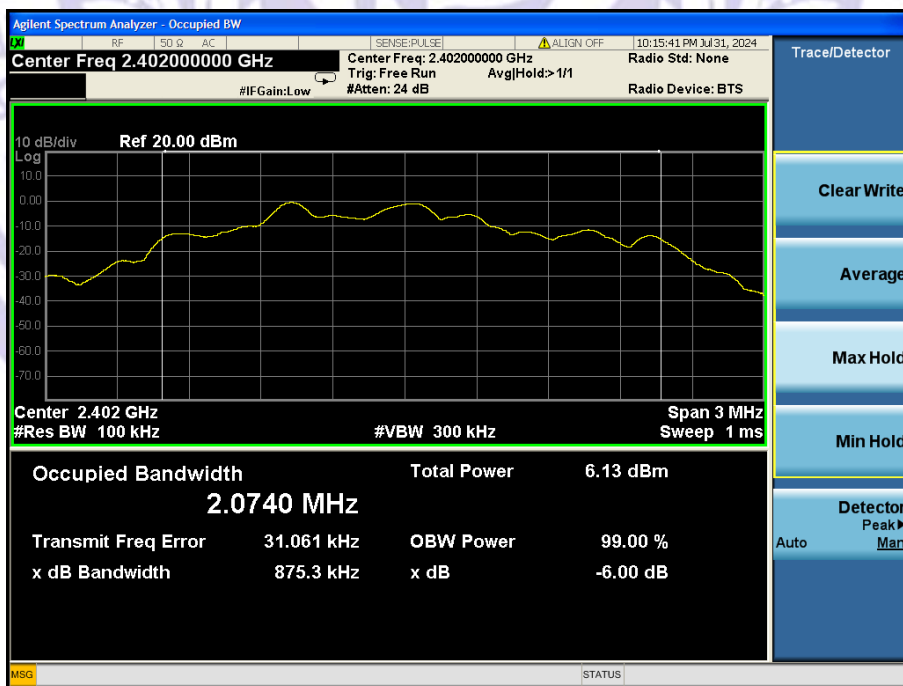

2M-CH19 2440MHz

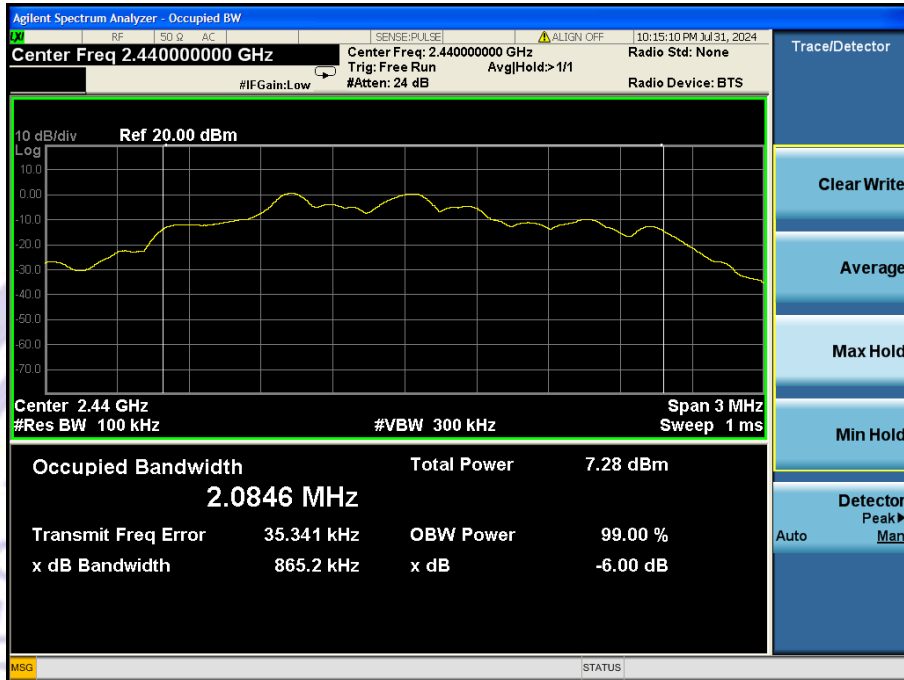

2M-CH39 2480MHz

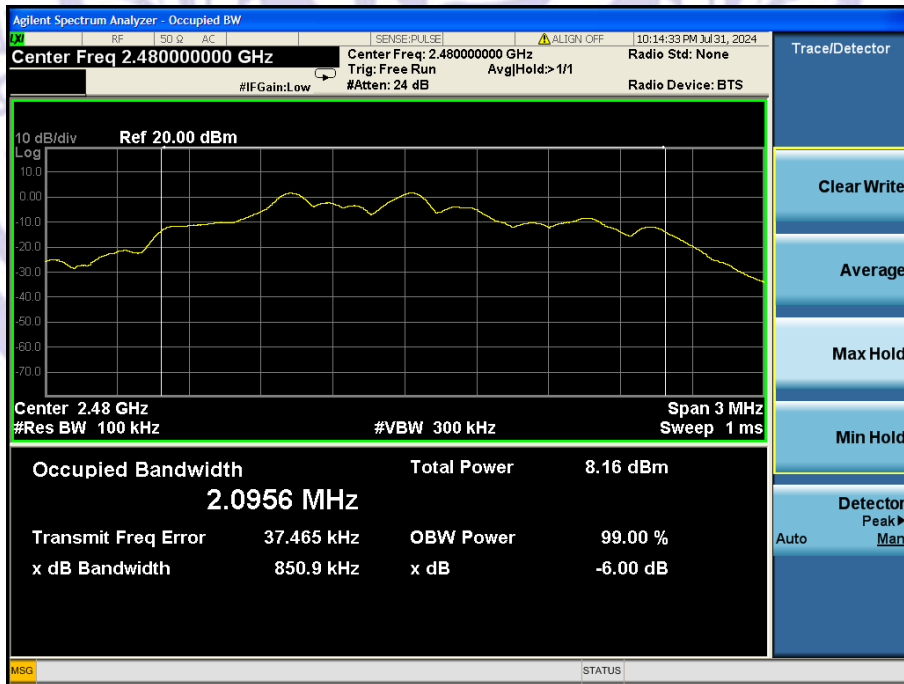

16 Maximum Peak Output Power(For Other than FHSS)

Test Requirement : FCC CFR47 Part 15 Section 15.247,
 Test Method : ANSI C63.10:2013
 Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

16.1 Test Procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

16.2 Test Result


1M

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit(dBm)	Result
CH01	2402 MHz	0.323	30	PASS
CH19	2440MHz	1.483	30	PASS
CH39	2480 MHz	2.379	30	PASS


2M

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit(dBm)	Result
CH01	2402 MHz	0.321	30	PASS
CH19	2440MHz	1.506	30	PASS
CH39	2480 MHz	2.387	30	PASS


1M-CH00 2402MHz

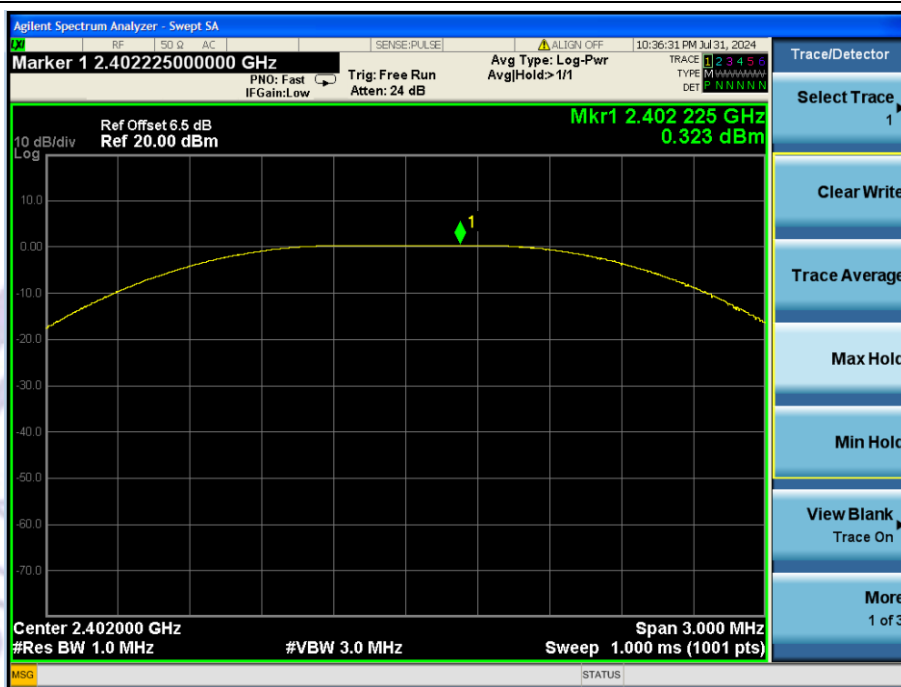

1M-CH19 2440MHz

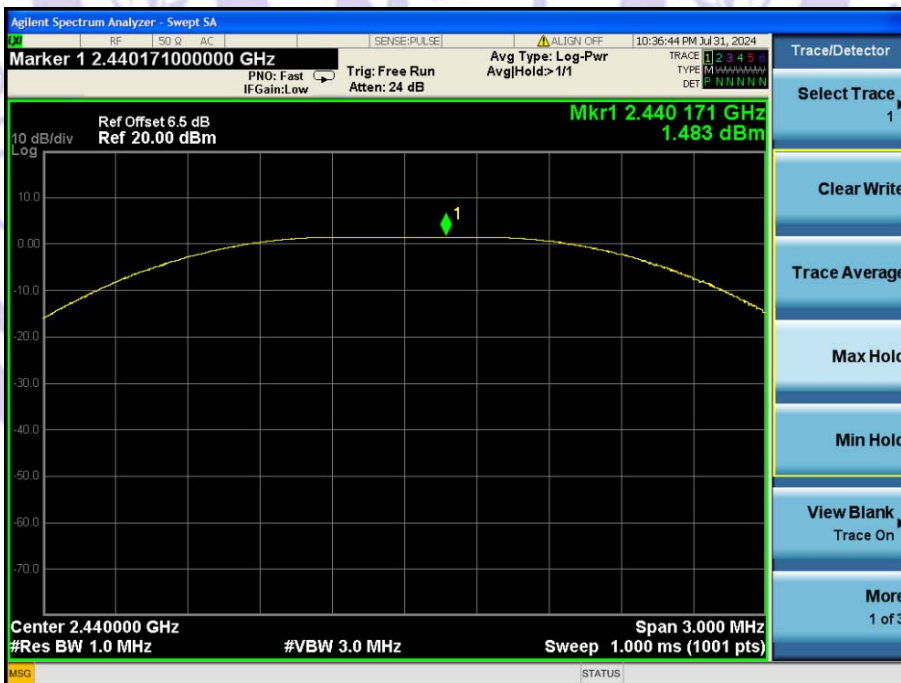


1M-CH39 2480MHz

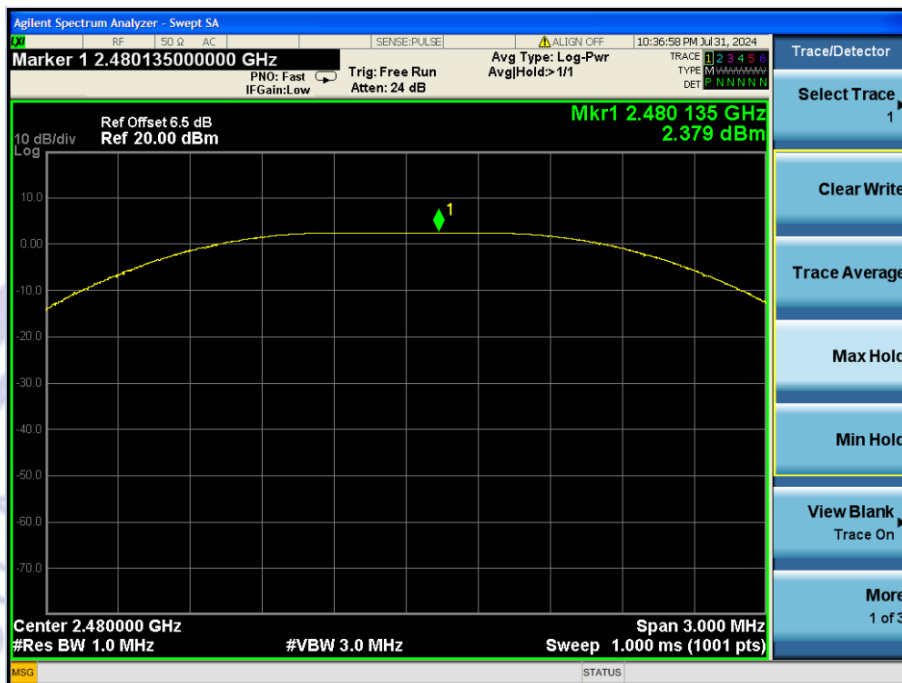


2M-CH00 2402MHz



2M-CH19 2440MHz

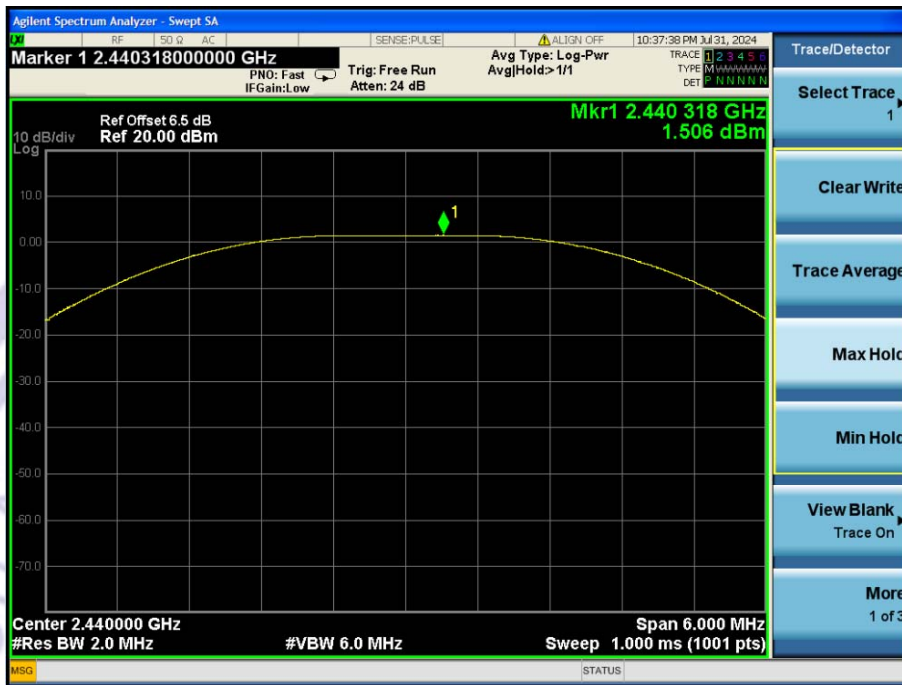

2M-CH39 2480MHz

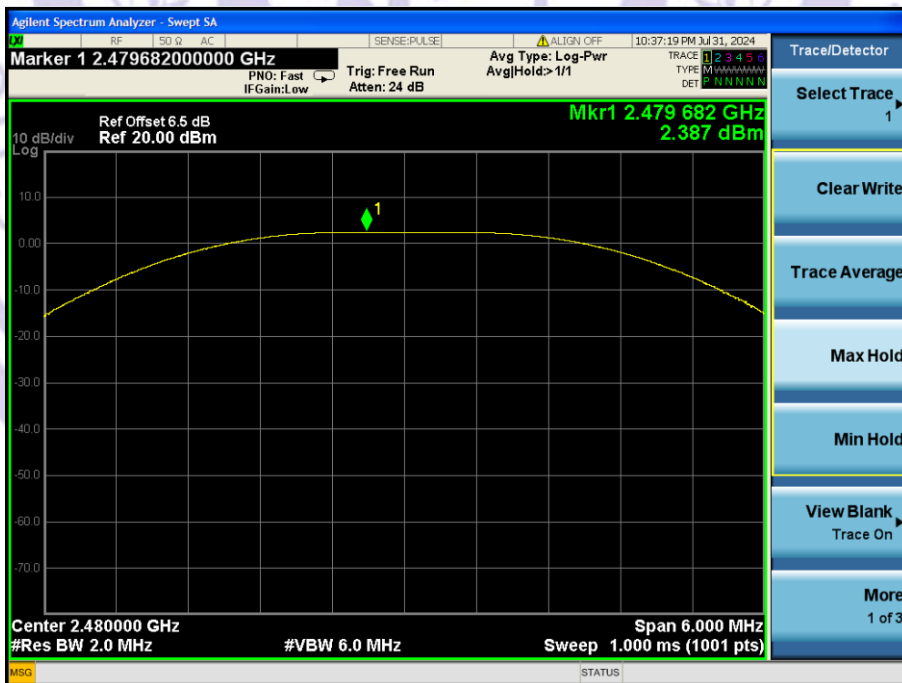

17 Power Spectral density(For Other than FHSS)

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

17.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

17.2 Test Result


1M

Test Channel	Frequency(MHz)	Power Density(dBm)	LIMIT(dBm)
CH01	2402 MHz	-19.252	8.00
CH19	2440 MHz	-18.645	8.00
CH39	2480 MHz	-17.702	8.00


2M

Test Channel	Frequency(MHz)	Power Density(dBm)	LIMIT(dBm)
CH01	2402 MHz	-22.191	8.00
CH19	2440 MHz	-21.016	8.00
CH39	2480 MHz	-20.032	8.00


1M-CH00 2402MHz

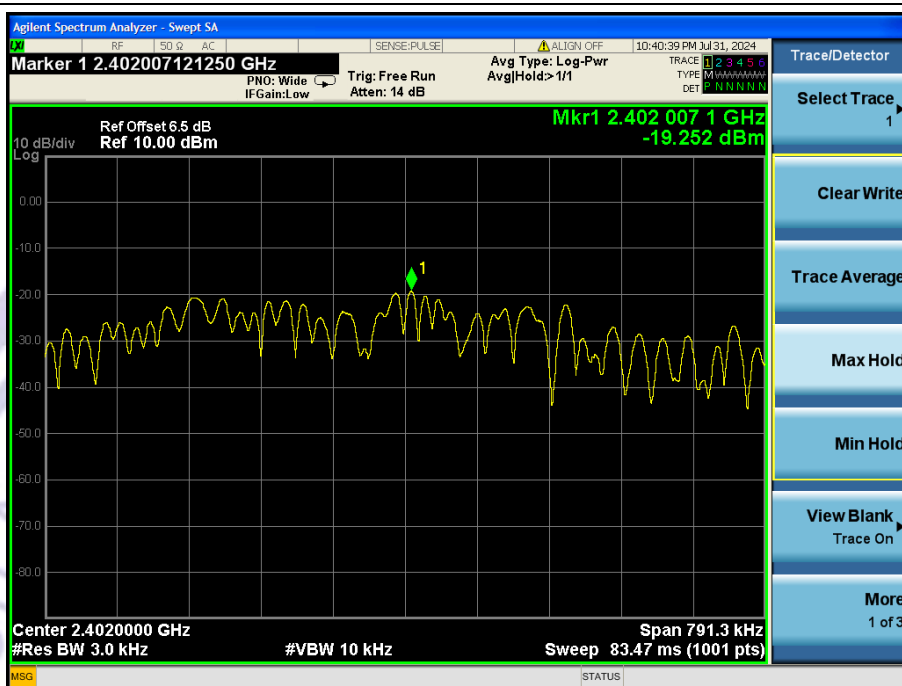


1M-CH19 2440MHz

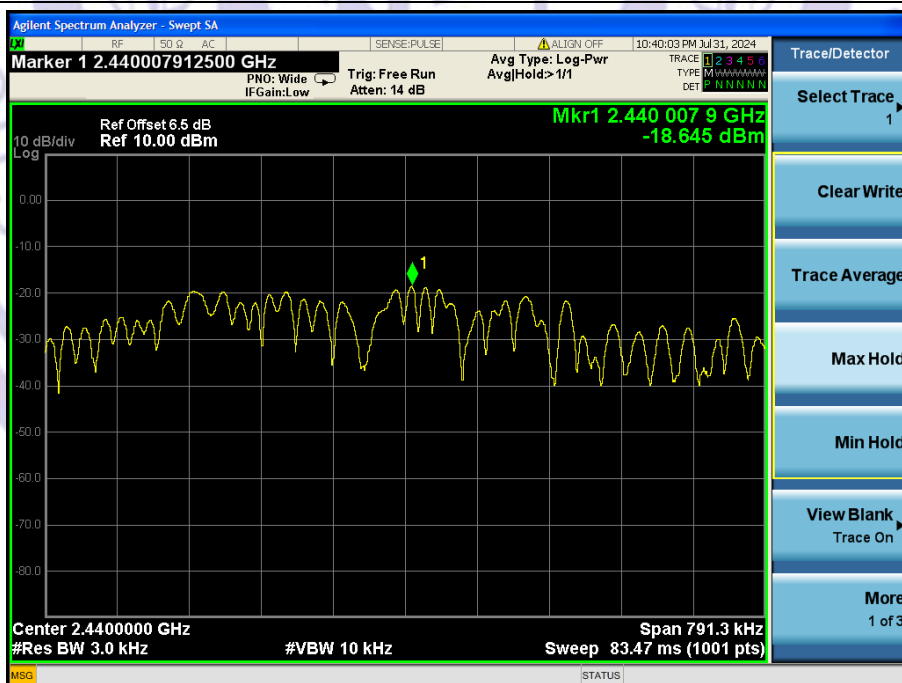


1M-CH39 2480MHz

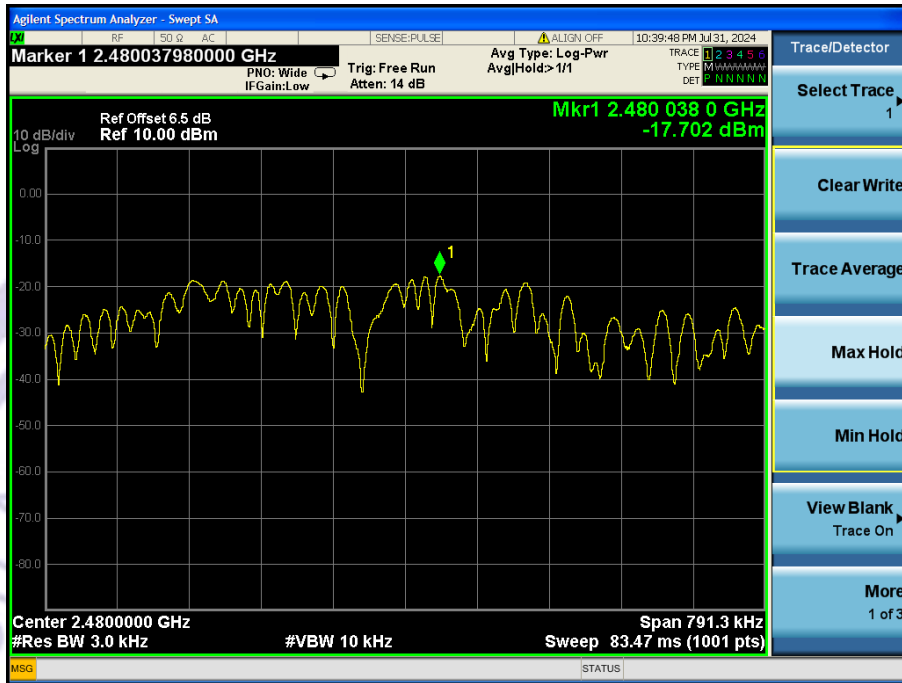


2M-CH00 2402MHz

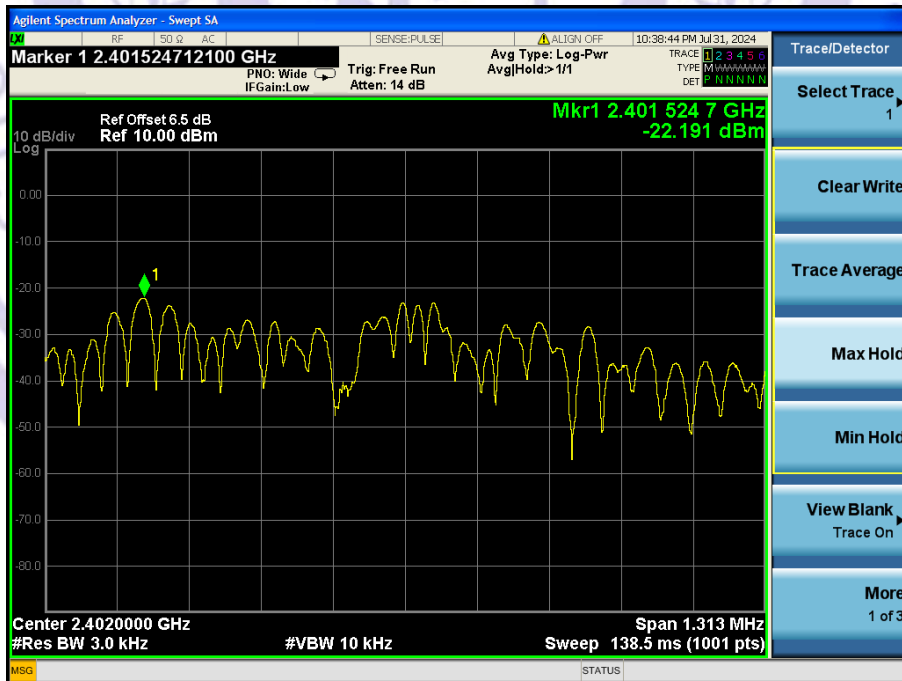

2M-CH19 2440MHz

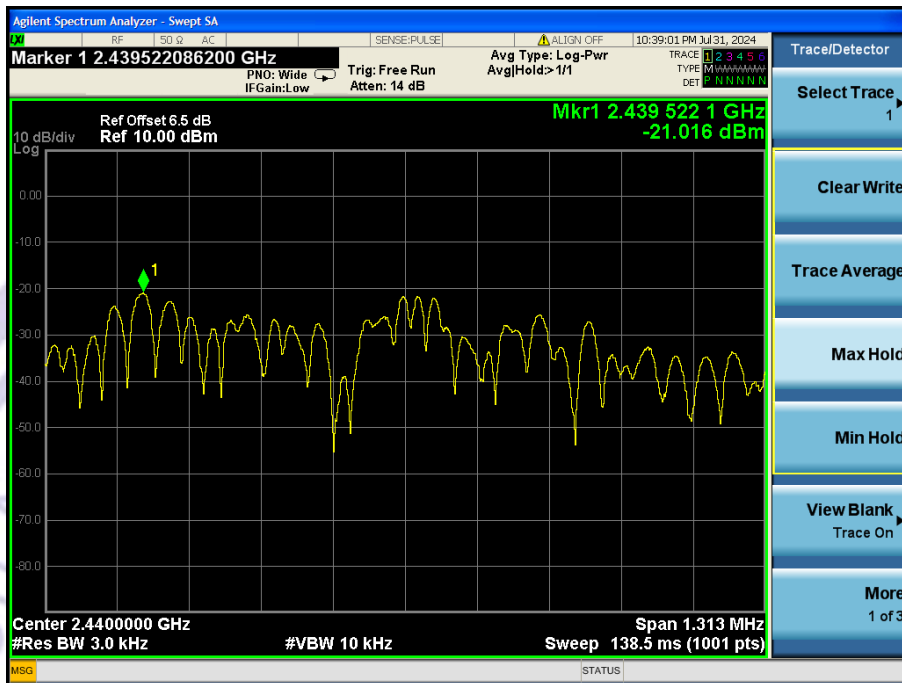

2M-CH39 2480MHz

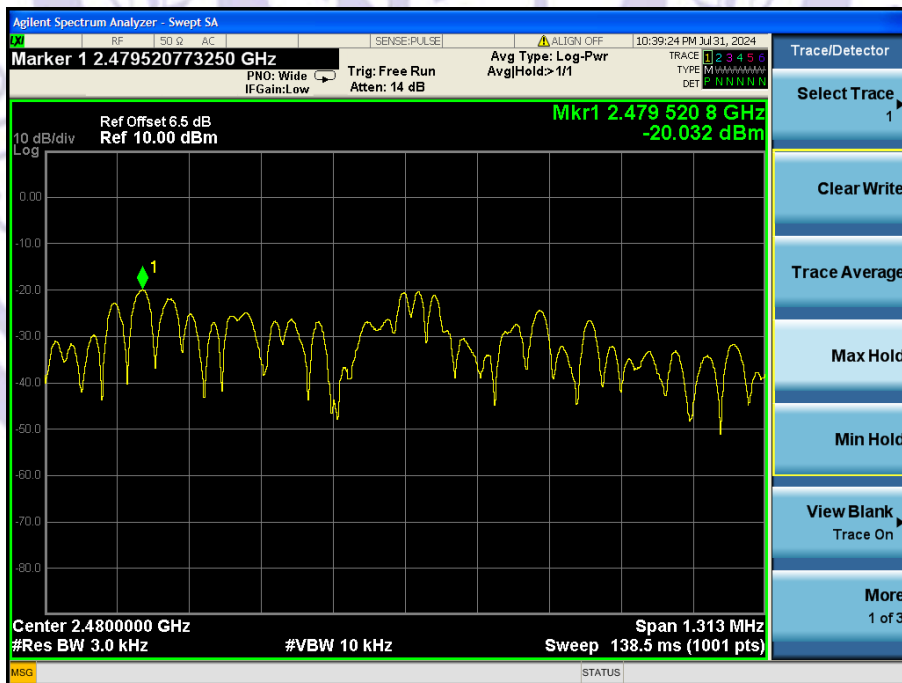

18 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

