


Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5180	2.09	2.176	96.05	0.18	0.48	0.29
NVNT	a	5200	2.088	2.174	96.04	0.18	0.48	0.28
NVNT	a	5240	2.088	2.176	95.96	0.18	0.48	0.28
NVNT	n20	5180	7.97	8.06	98.88	0.05	0.13	/
NVNT	n20	5200	7.97	8.06	98.88	0.05	0.13	/
NVNT	n20	5240	7.98	8.06	99.01	0.04	0.13	/
NVNT	n40	5190	7.96	8.05	98.88	0.05	0.13	/
NVNT	n40	5230	7.96	8.05	98.88	0.05	0.13	/

Test Graphs


Duty Cycle NVNT a 5180MHz

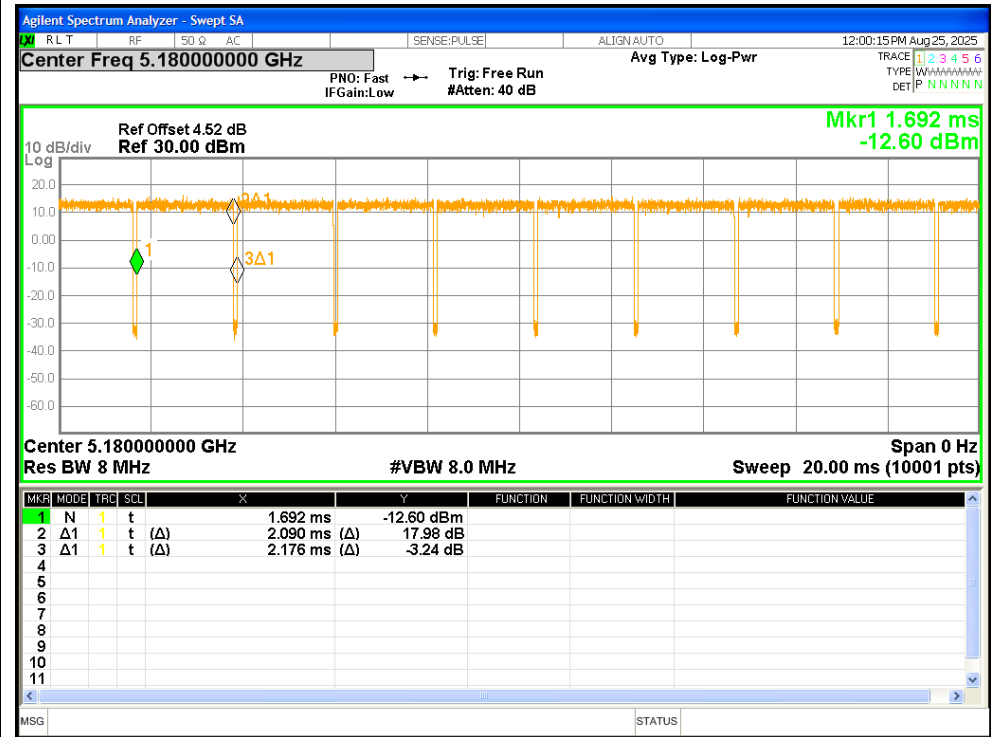


Duty Cycle NVNT a 5200MHz

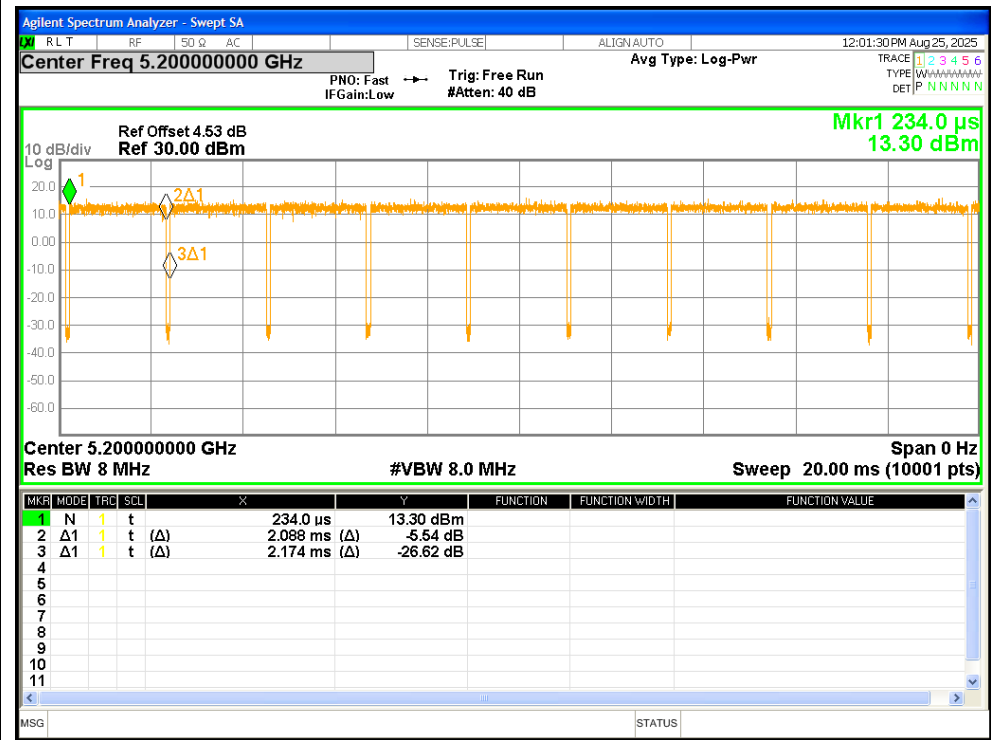


Duty Cycle NVNT a 5240MHz

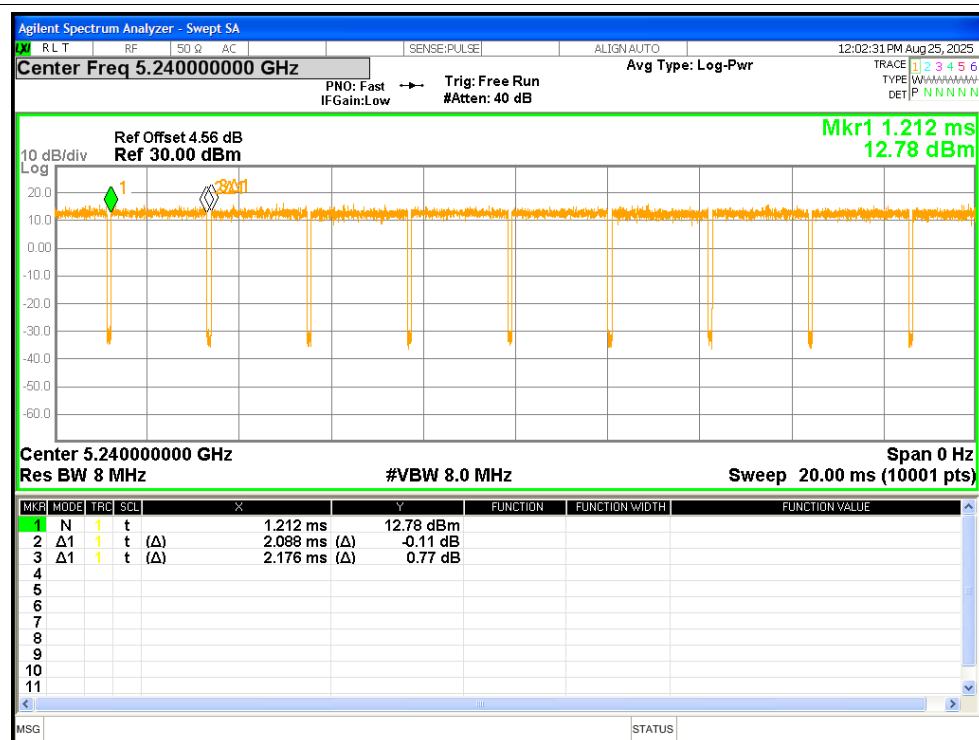


Duty Cycle NVNT n20 5180MHz


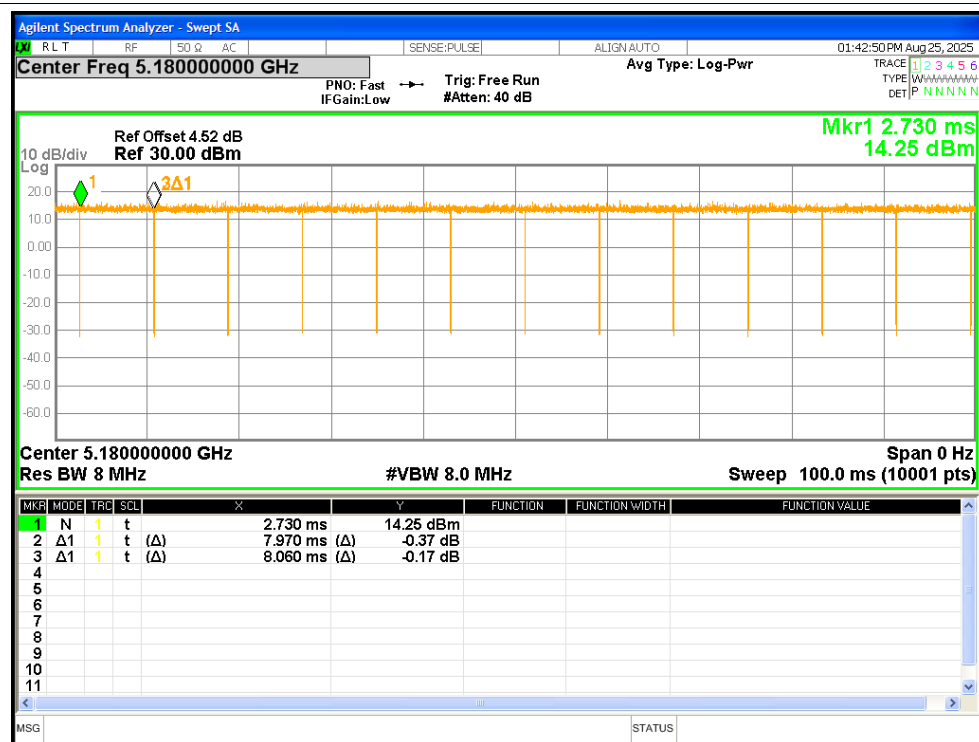


Duty Cycle NVNT n20 5200MHz

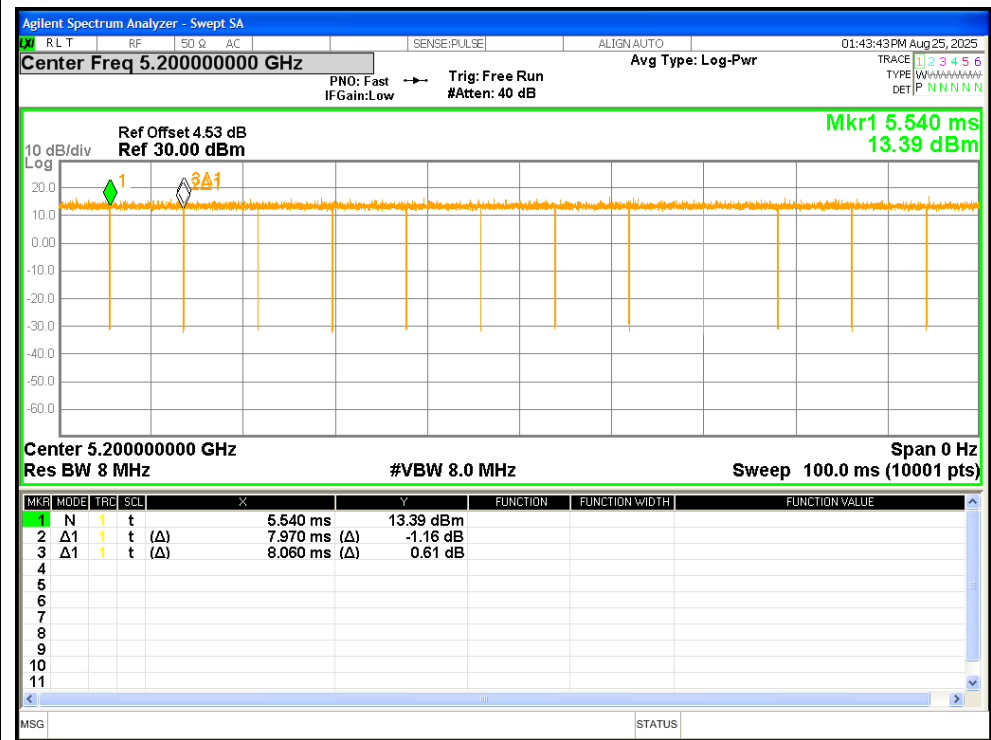

Duty Cycle NVNT n20 5240MHz

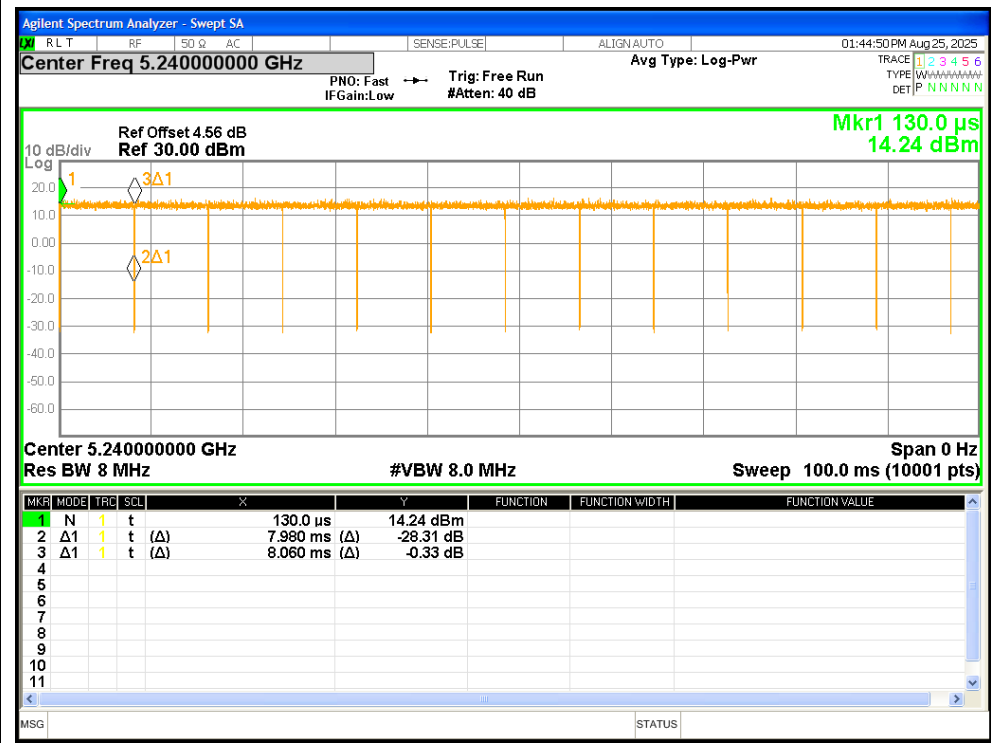

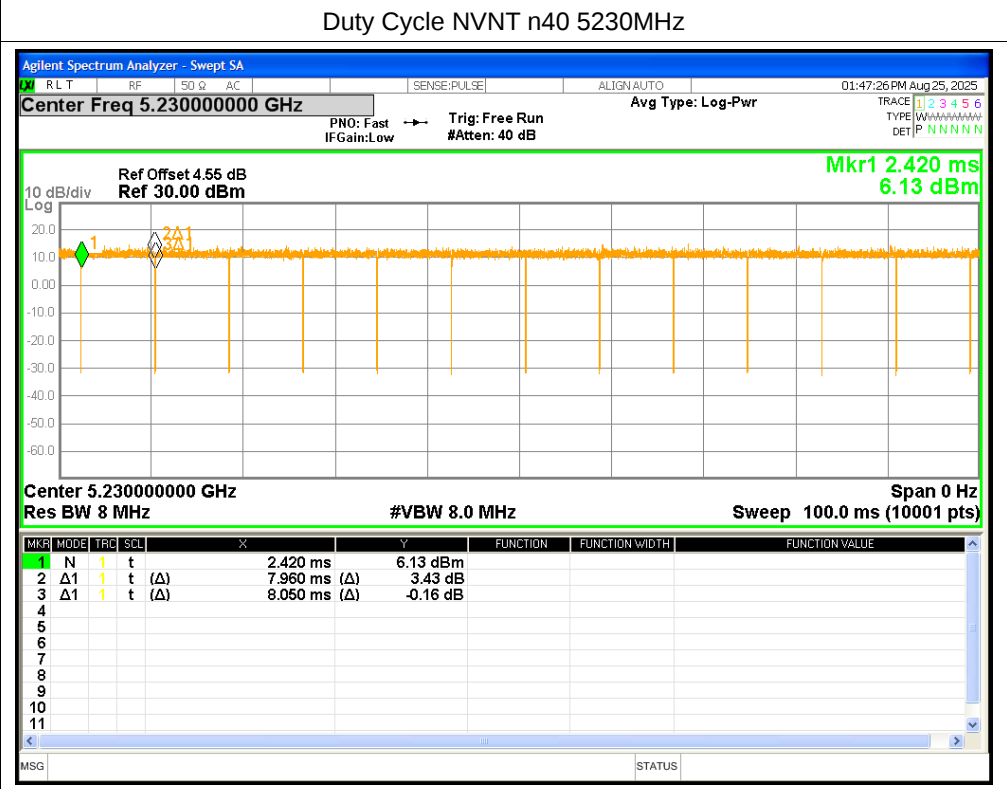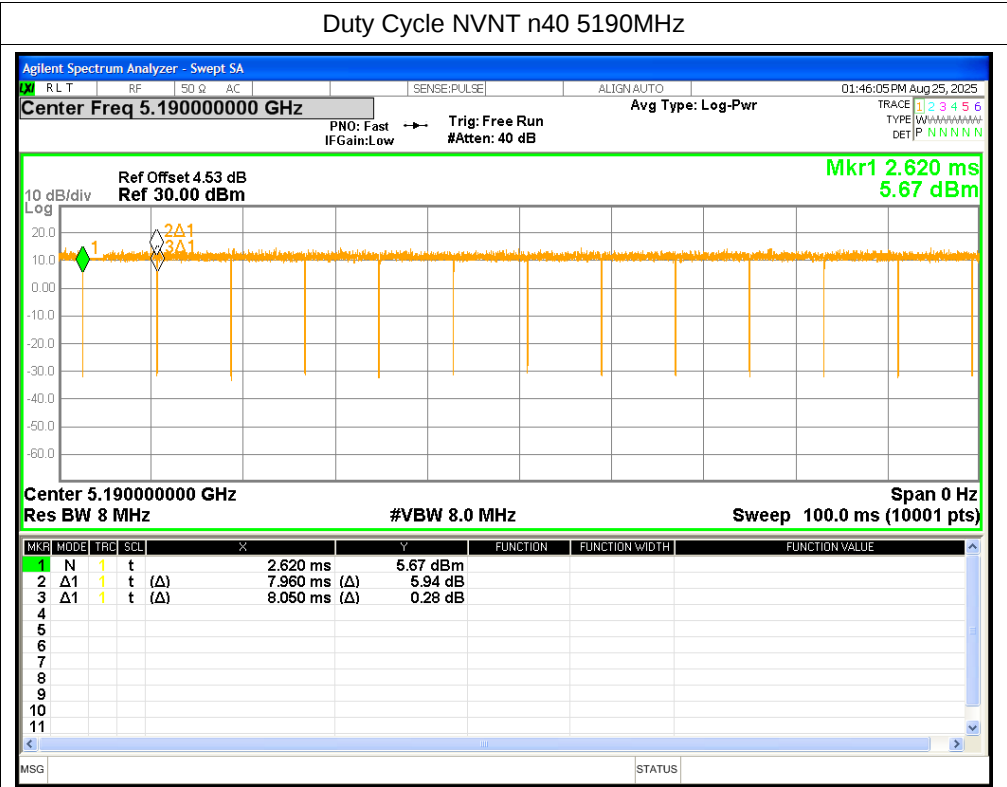


Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	10.47	10.47	<=24	Pass
NVNT	a	5200	10.08	10.08	<=24	Pass
NVNT	a	5240	10.38	10.38	<=24	Pass
NVNT	n20	5180	10.84	10.84	<=24	Pass
NVNT	n20	5200	10.51	10.51	<=24	Pass
NVNT	n20	5240	10.82	10.82	<=24	Pass
NVNT	n40	5190	11.24	11.24	<=24	Pass
NVNT	n40	5230	11.39	11.39	<=24	Pass


Test Graphs



Power NVNT a 5180MHz


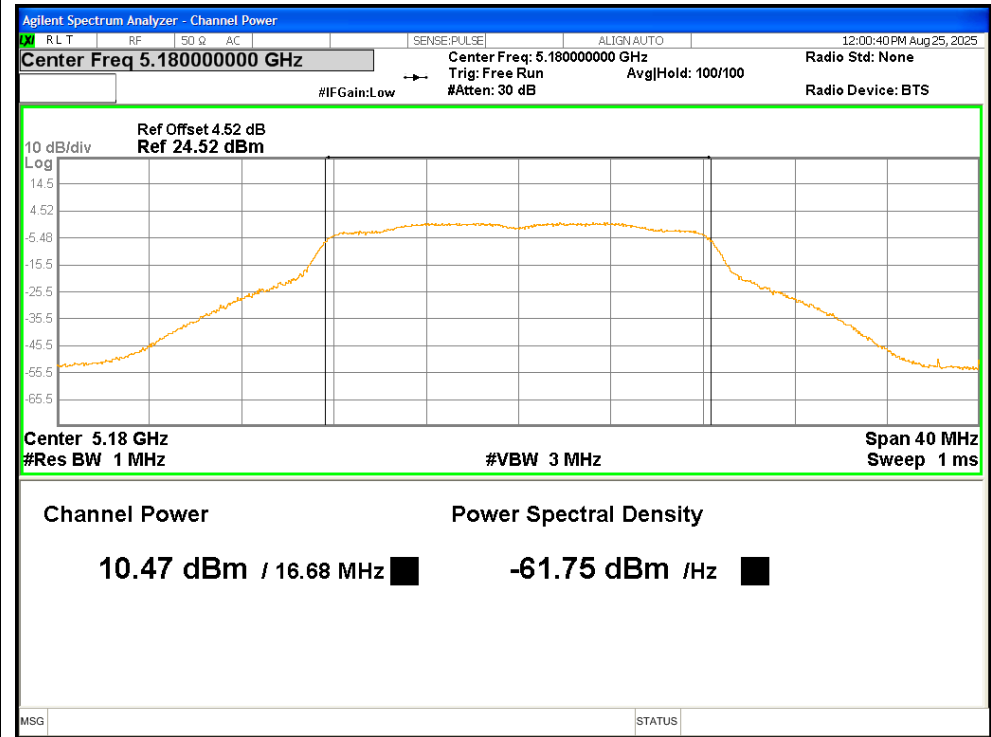


Power NVNT a 5200MHz

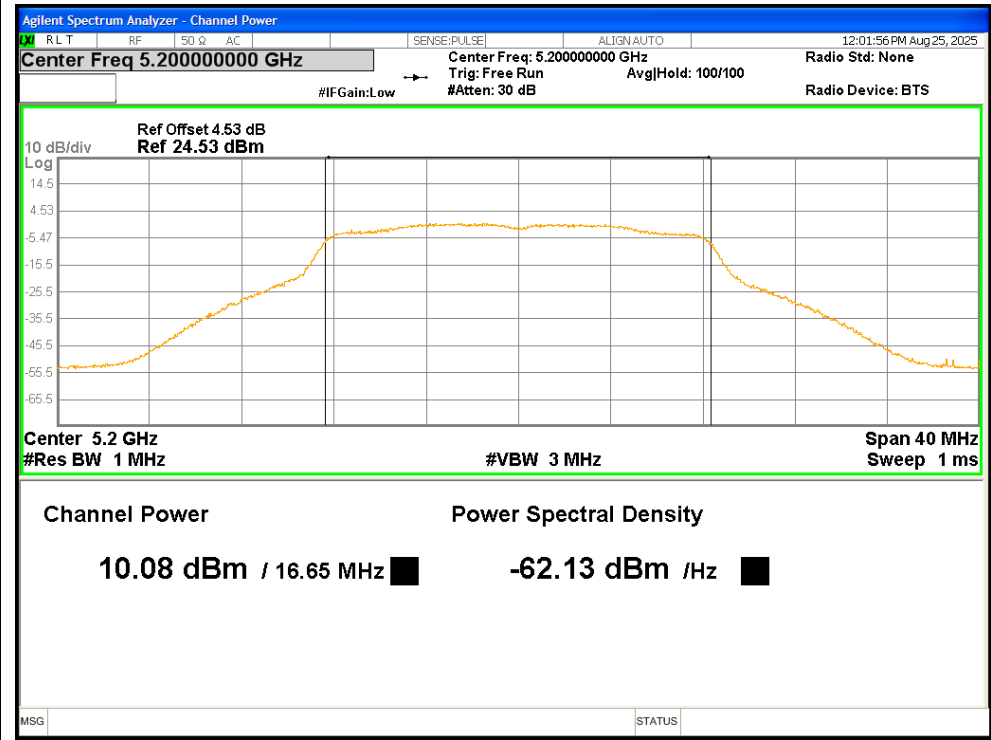

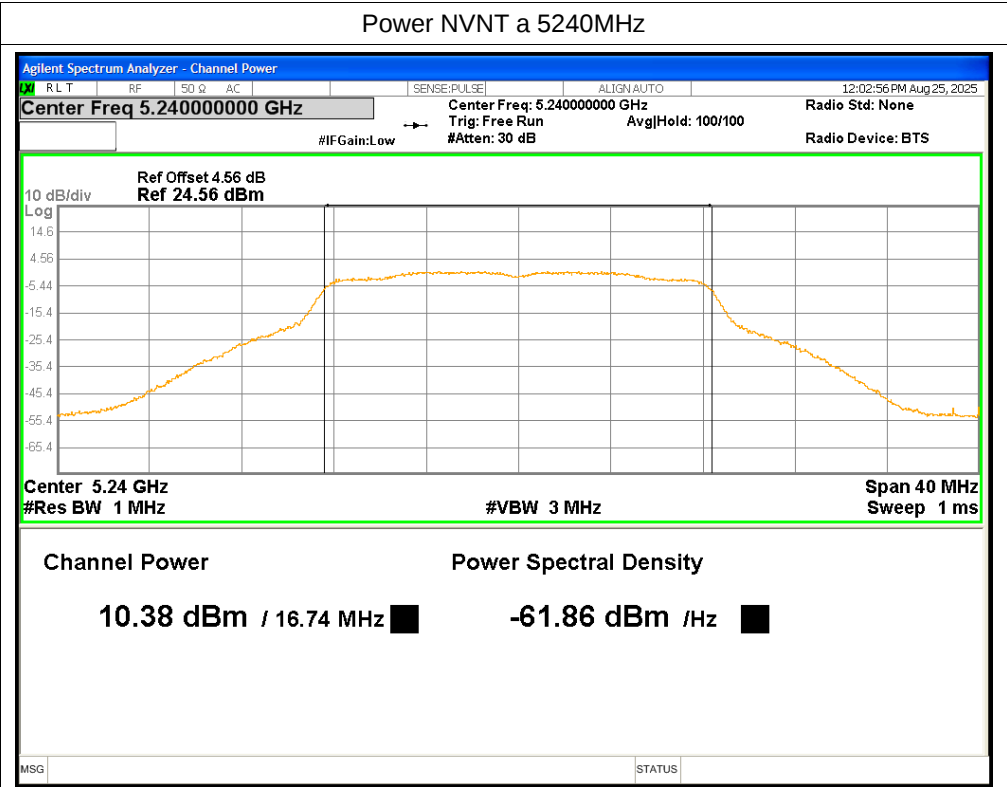

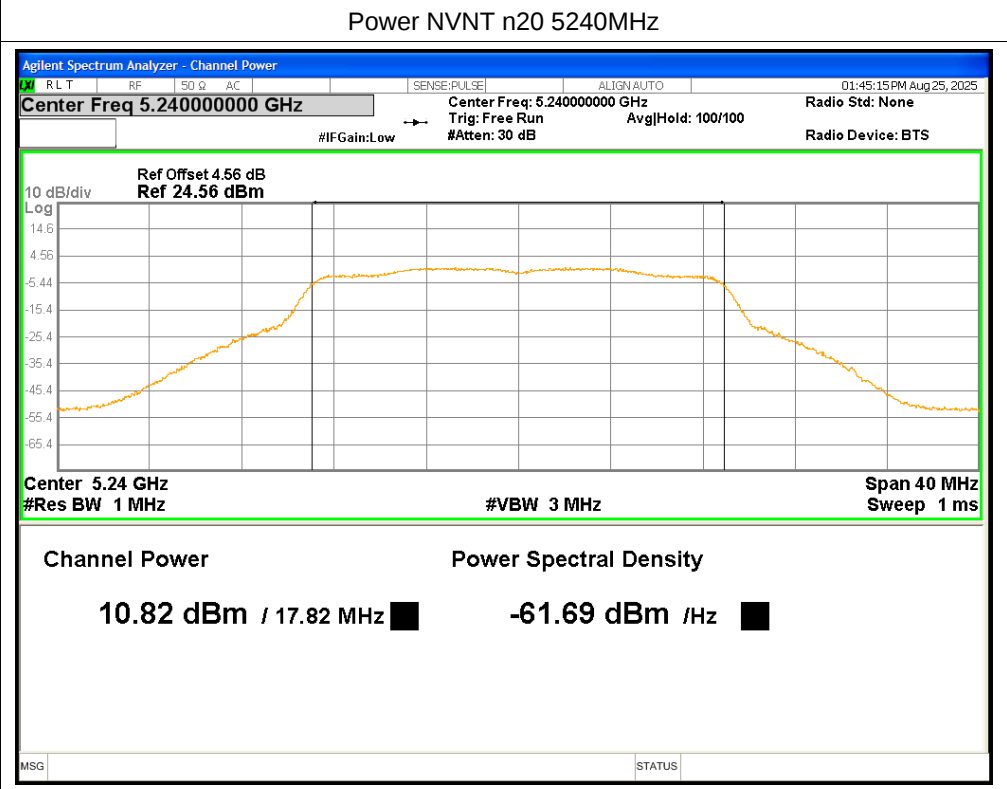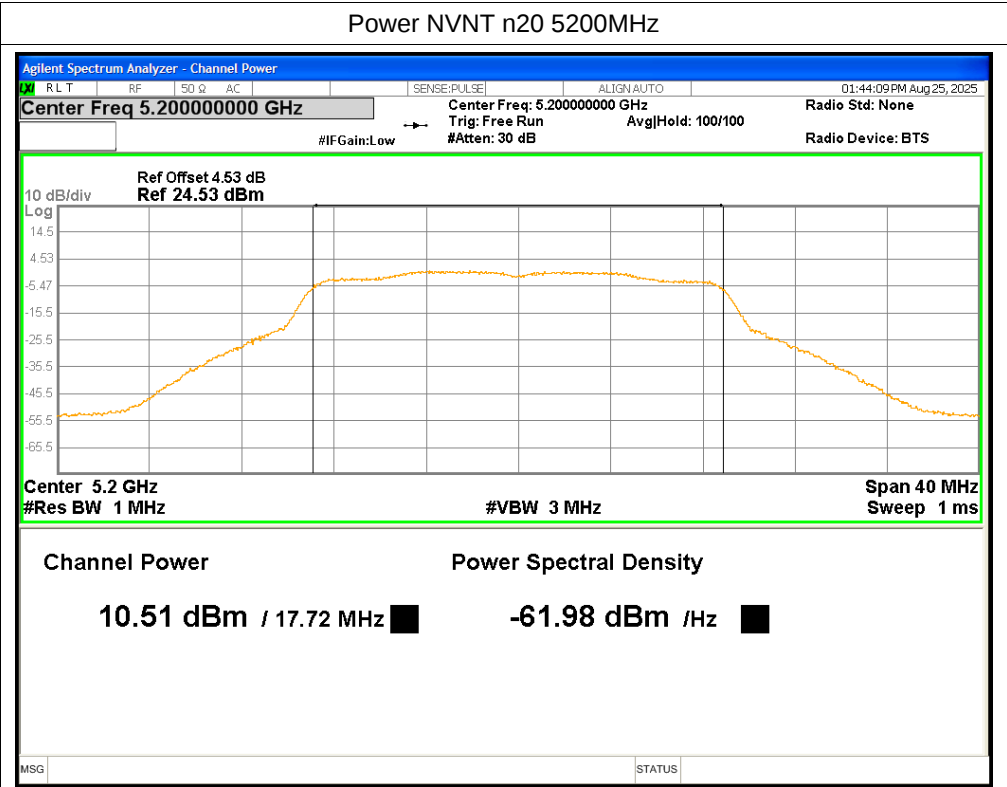

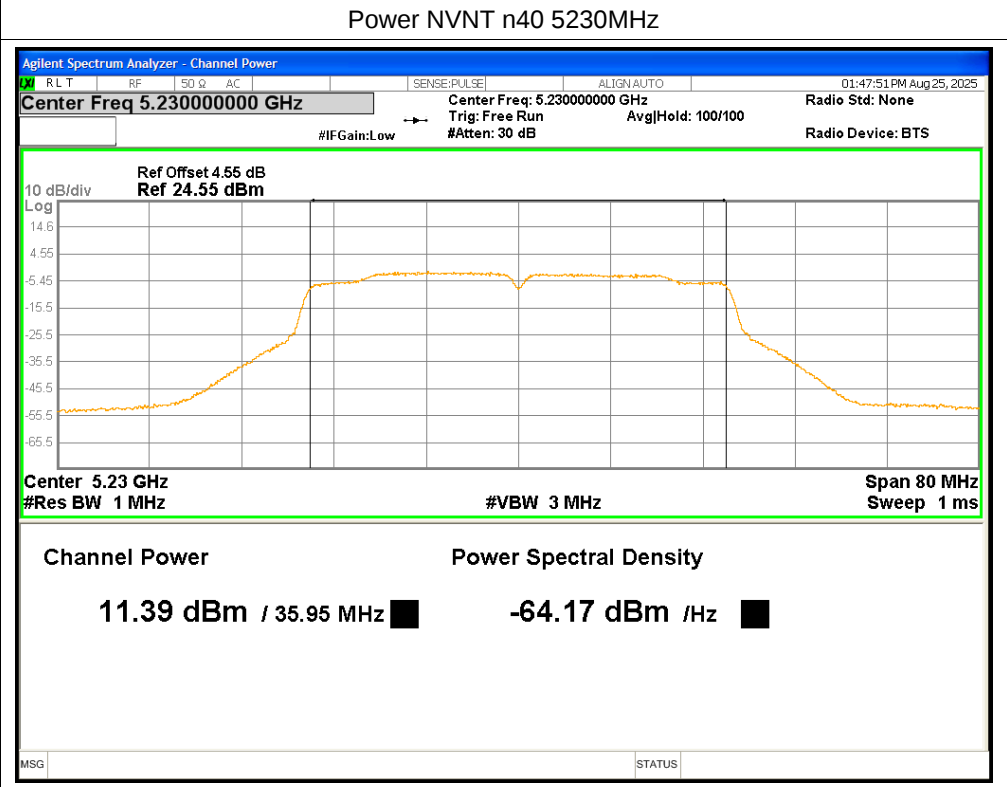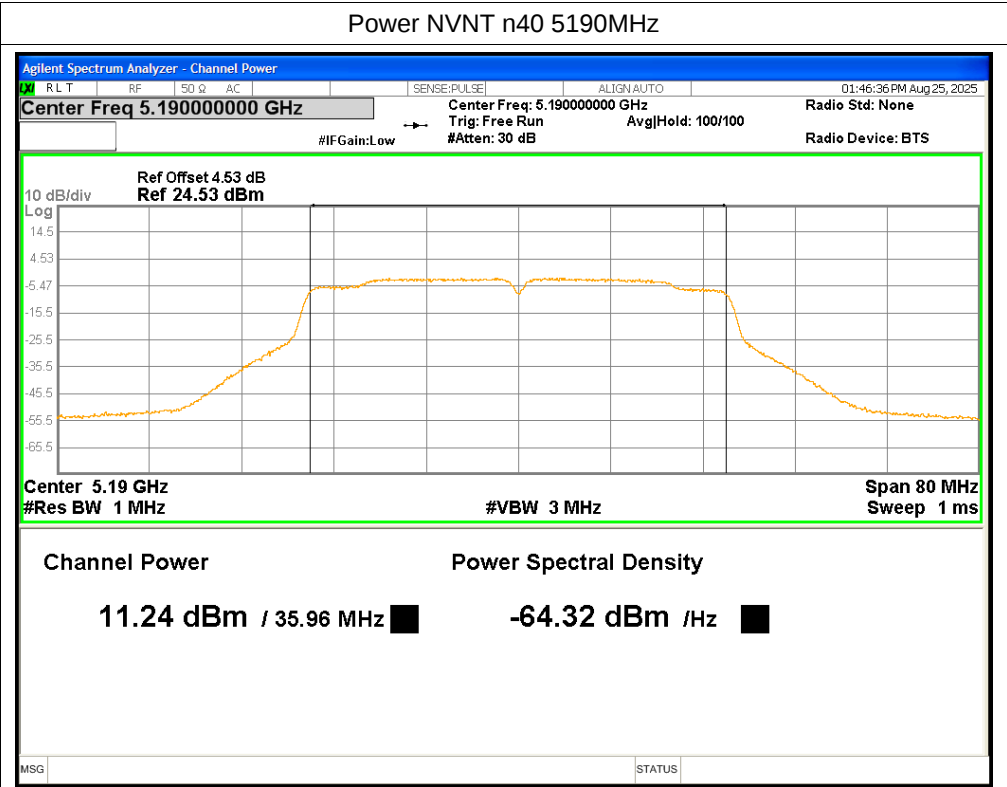


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	23.7	Pass
NVNT	a	5200	23.45	Pass
NVNT	a	5240	24.62	Pass
NVNT	n20	5180	24.12	Pass
NVNT	n20	5200	24.71	Pass
NVNT	n20	5240	24.32	Pass
NVNT	n40	5190	42.43	Pass
NVNT	n40	5230	44.04	Pass

Test Graphs


-26dB Bandwidth NVNT a 5180MHz

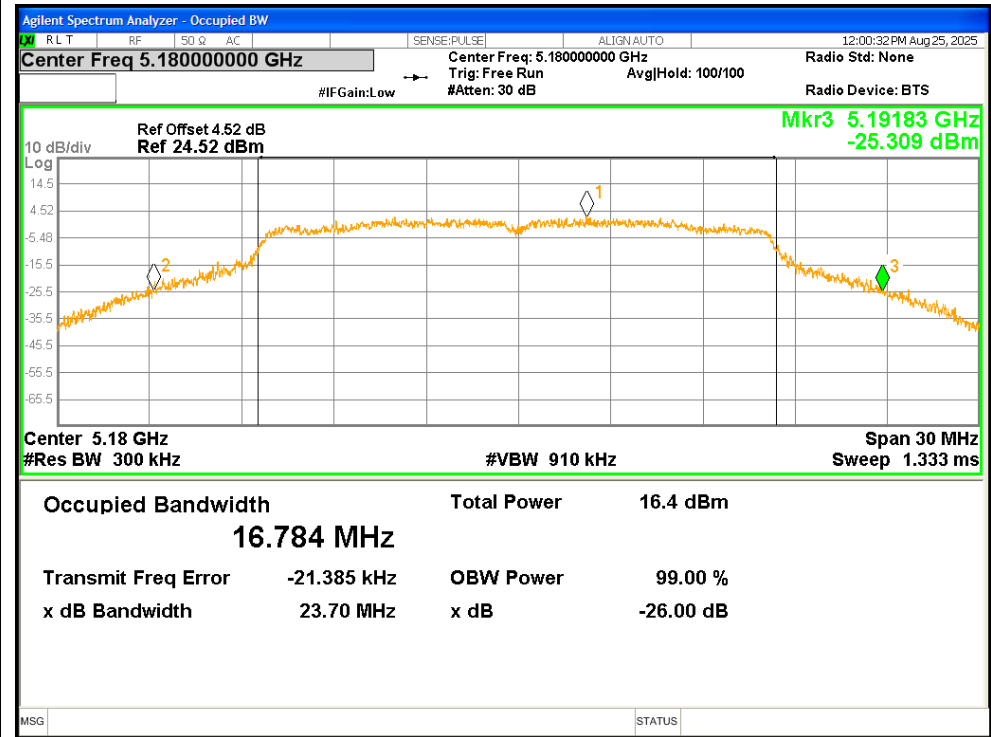


-26dB Bandwidth NVNT a 5200MHz


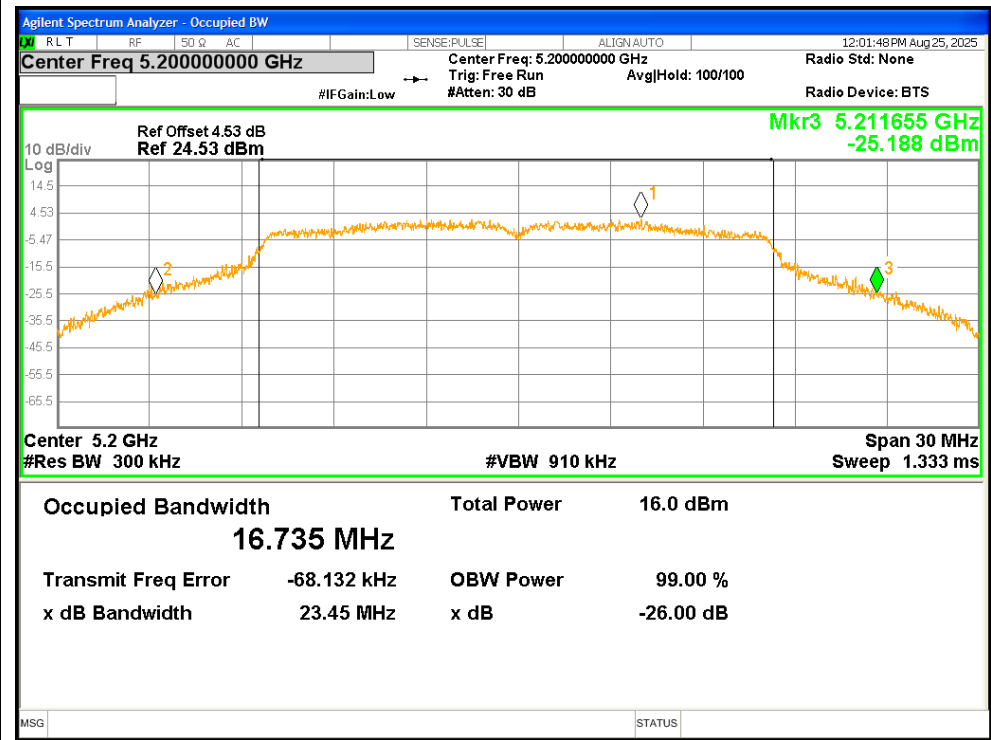


-26dB Bandwidth NVNT a 5240MHz

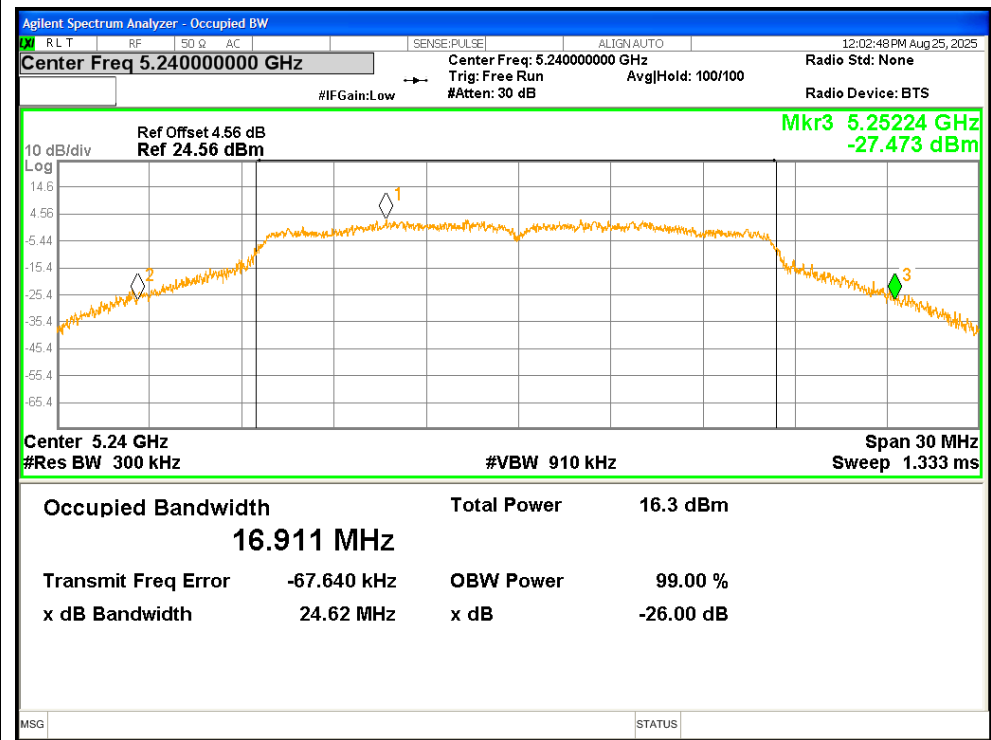


-26dB Bandwidth NVNT n20 5180MHz

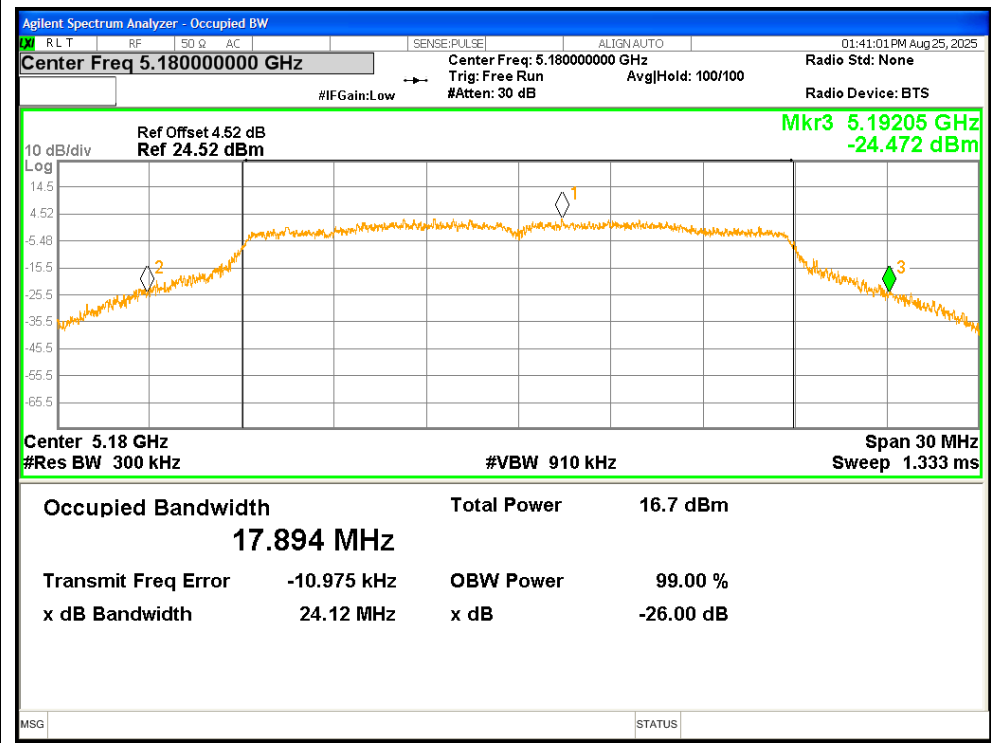


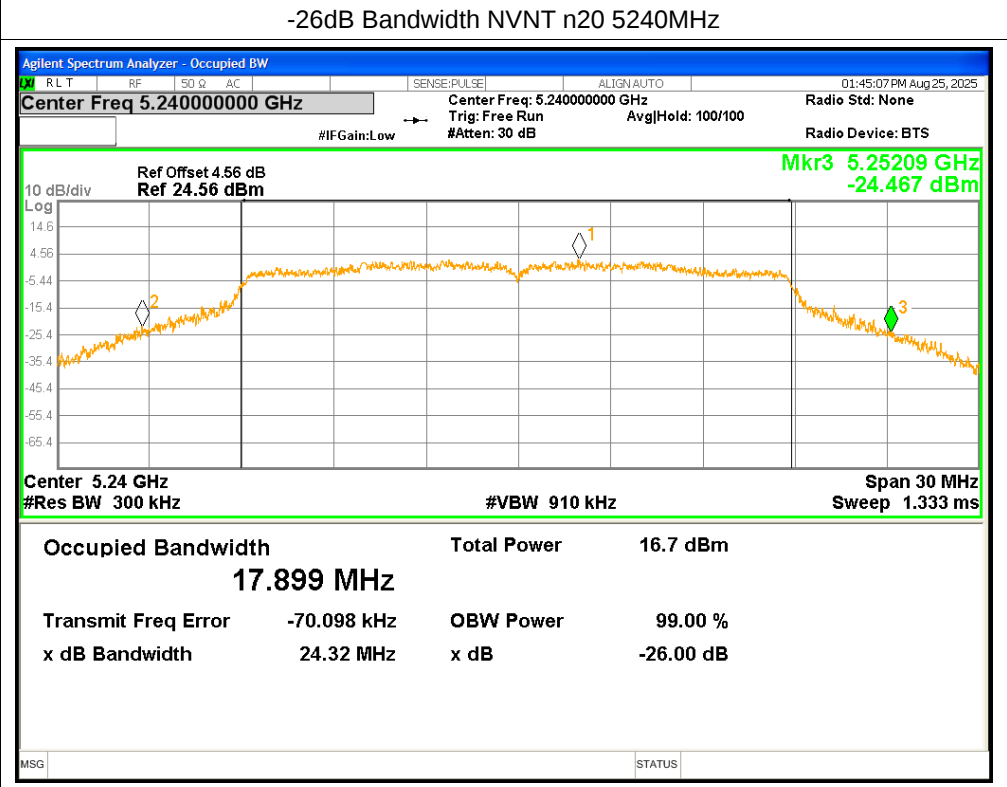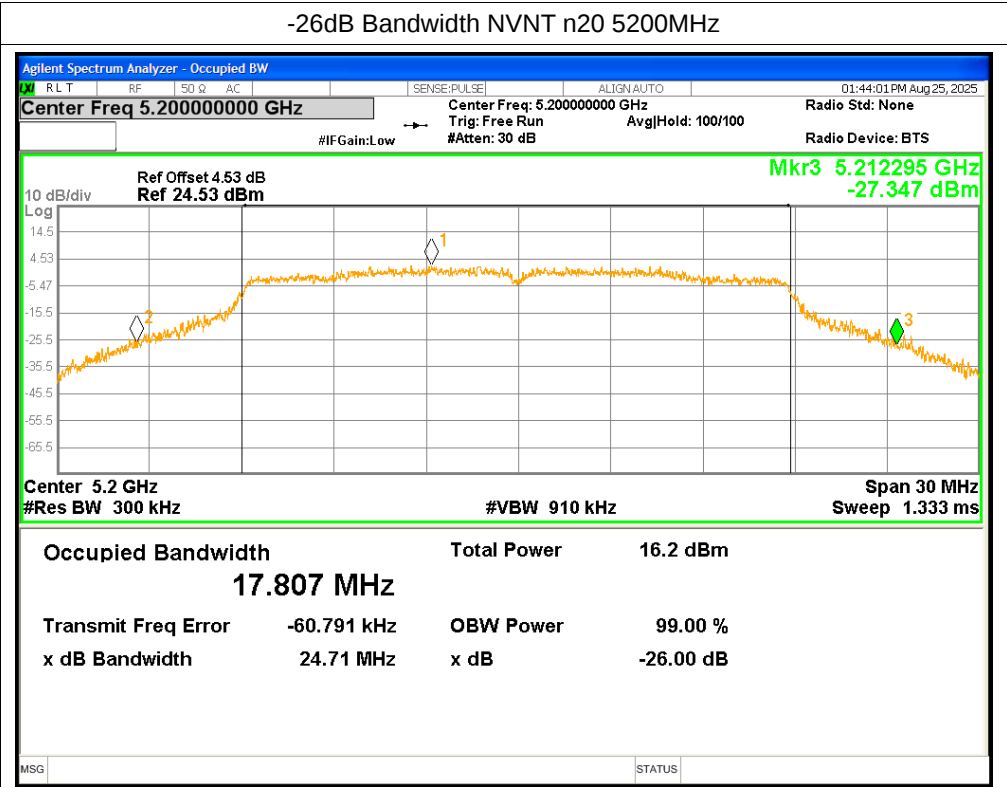

-26dB Bandwidth NVNT n40 5190MHz


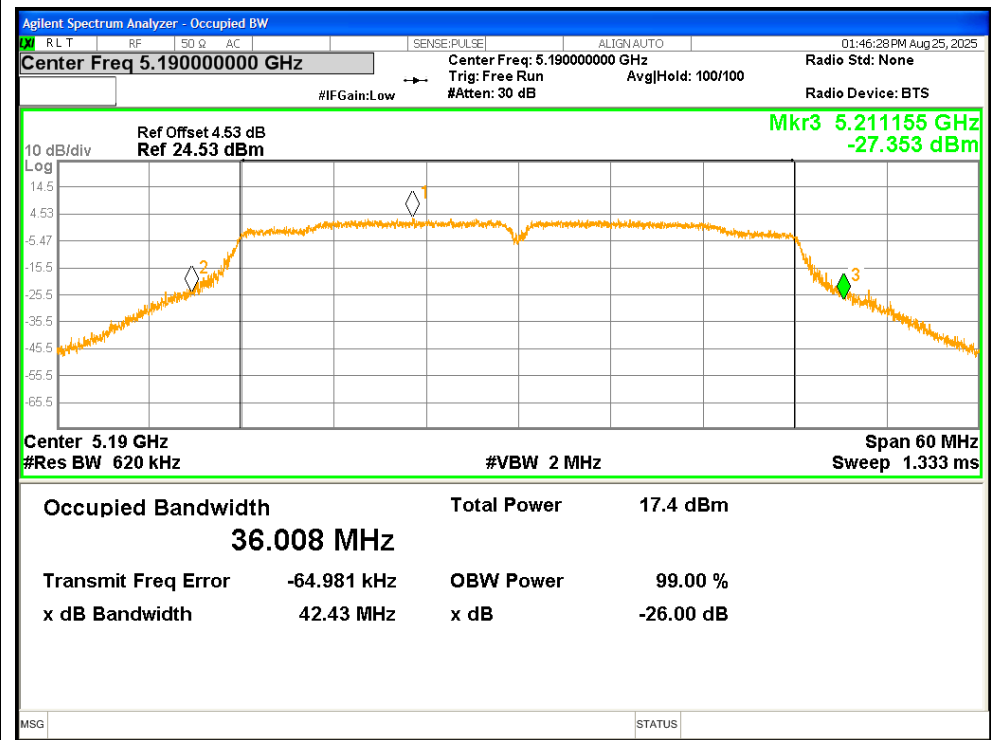




-26dB Bandwidth NVNT n40 5230MHz


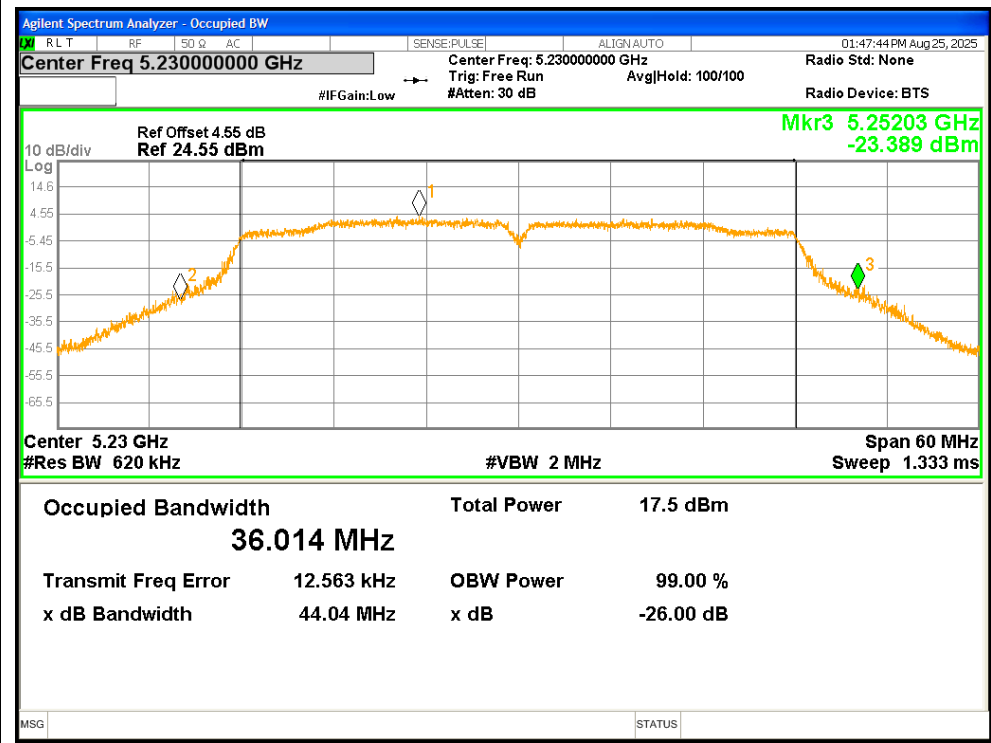




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.675
NVNT	a	5200	16.645
NVNT	a	5240	16.738
NVNT	n20	5180	17.774
NVNT	n20	5200	17.724
NVNT	n20	5240	17.815
NVNT	n40	5190	35.956
NVNT	n40	5230	35.945

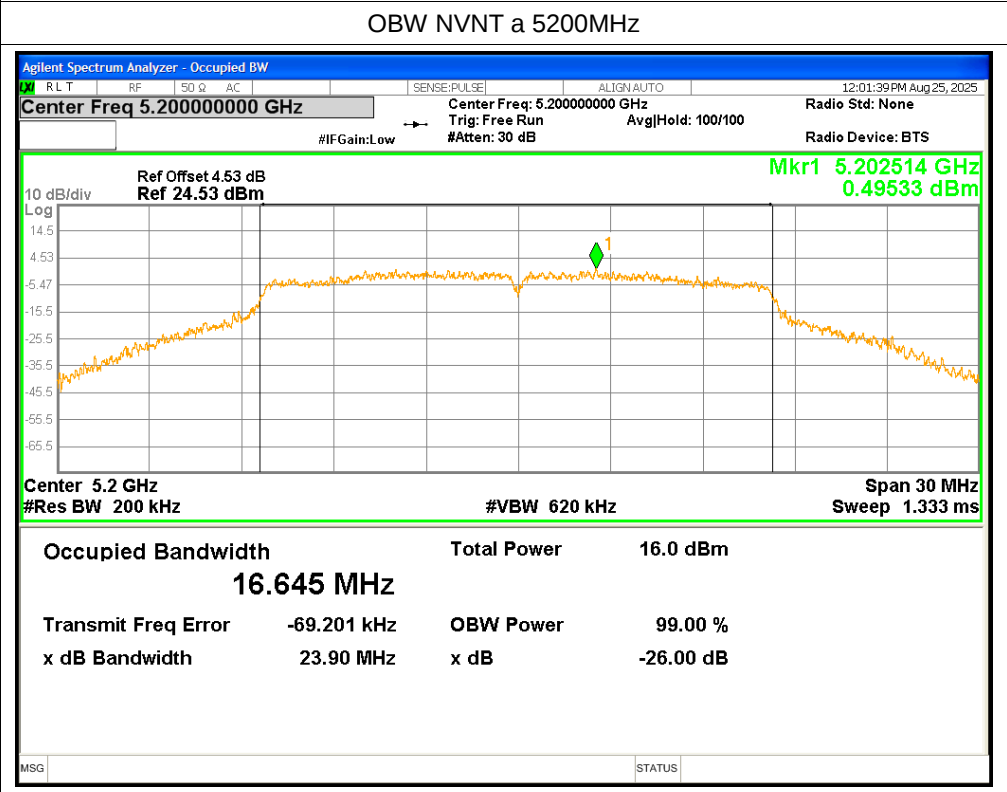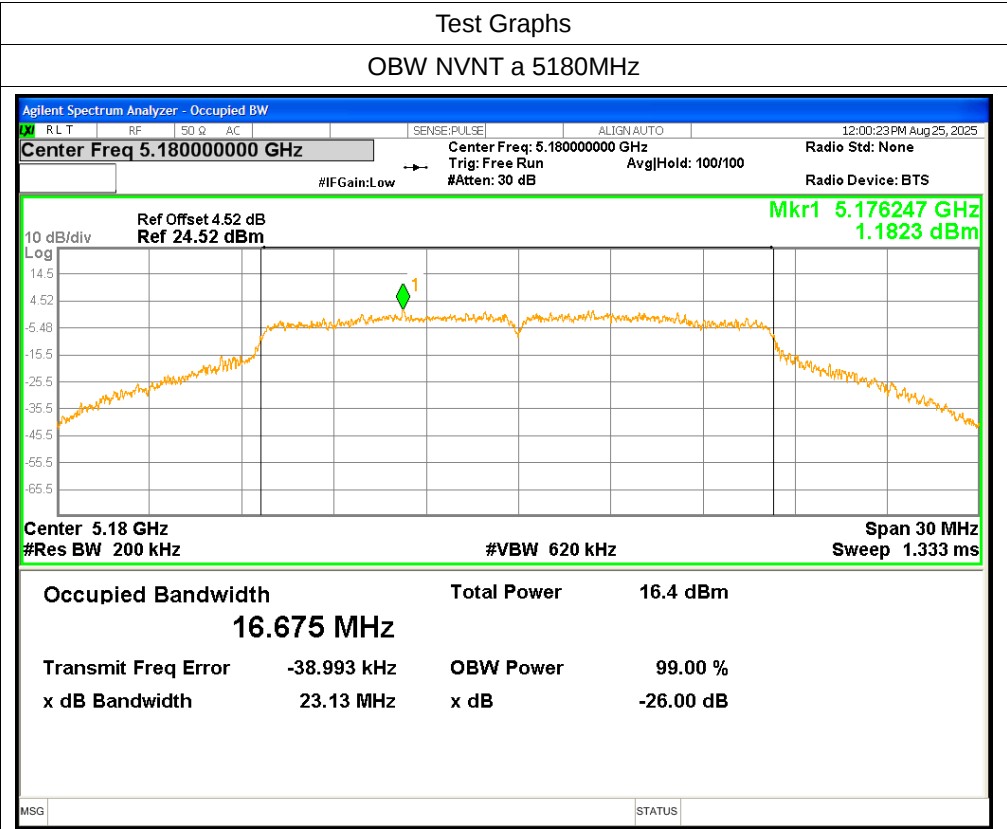

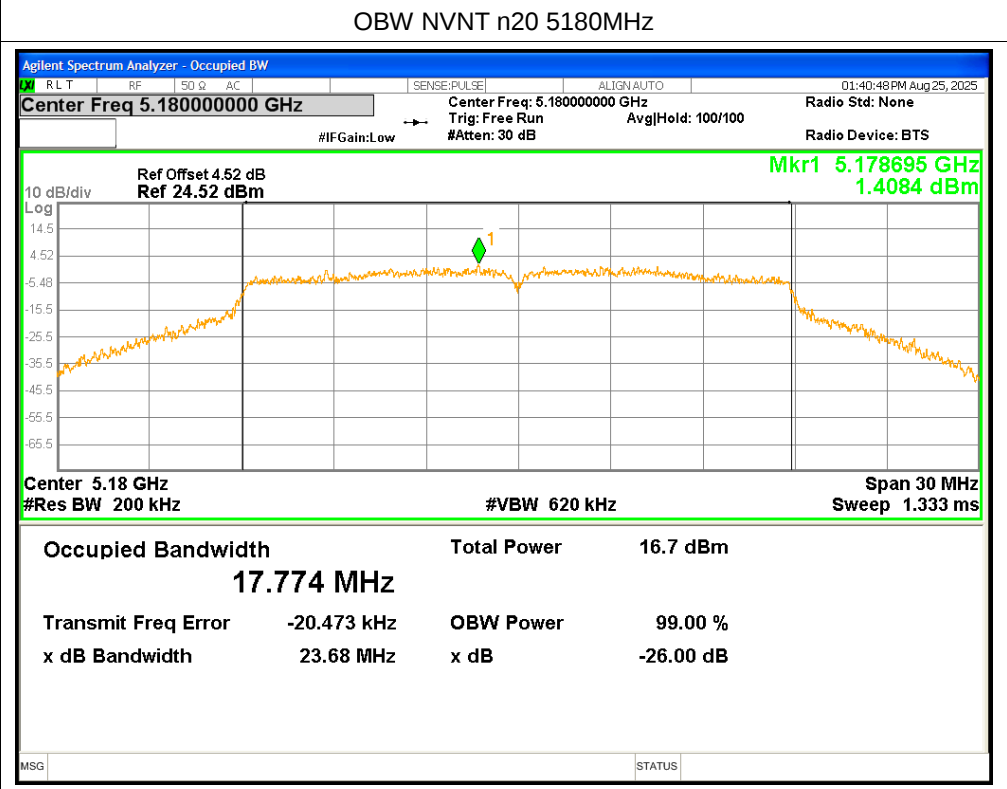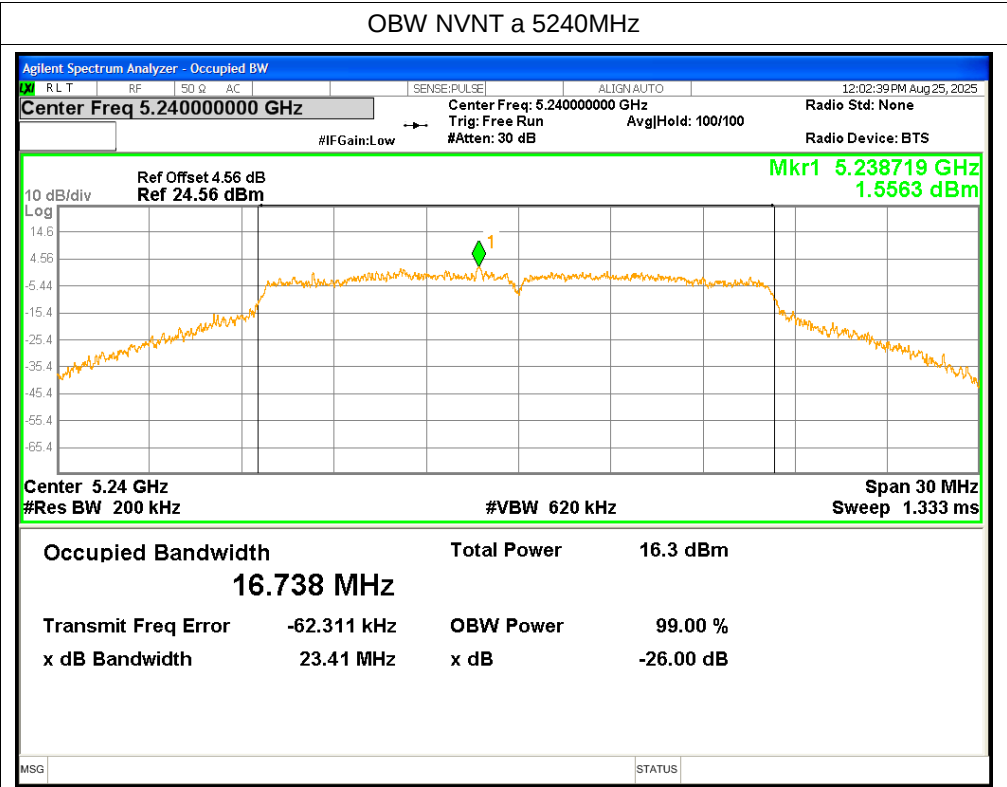

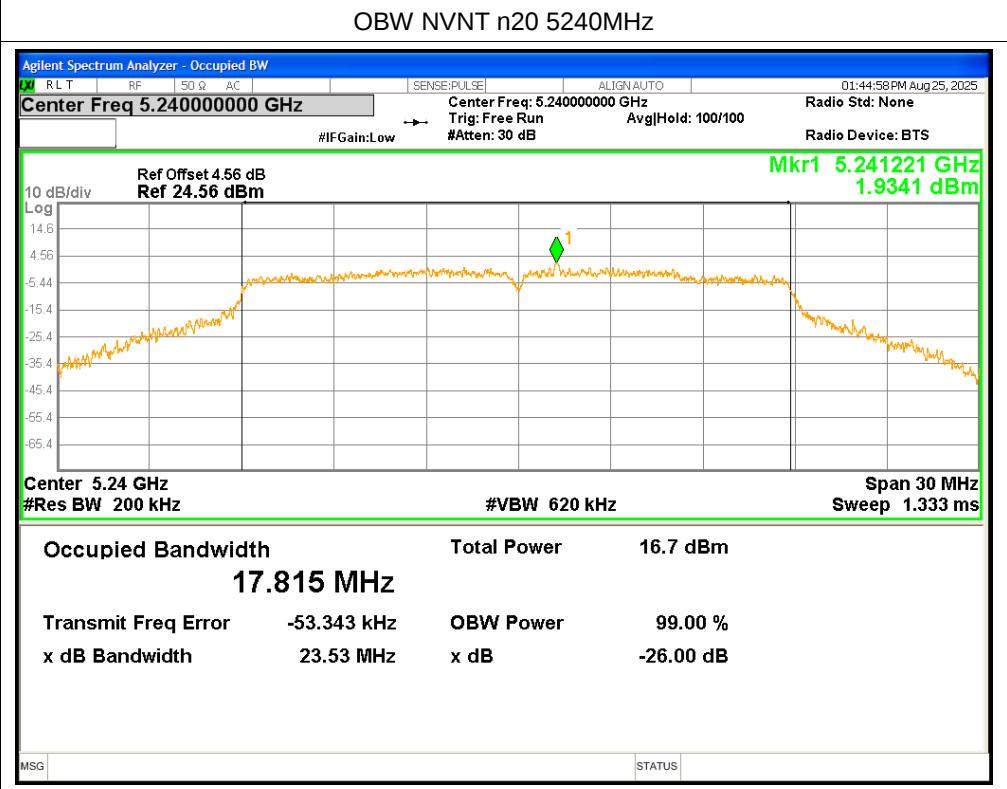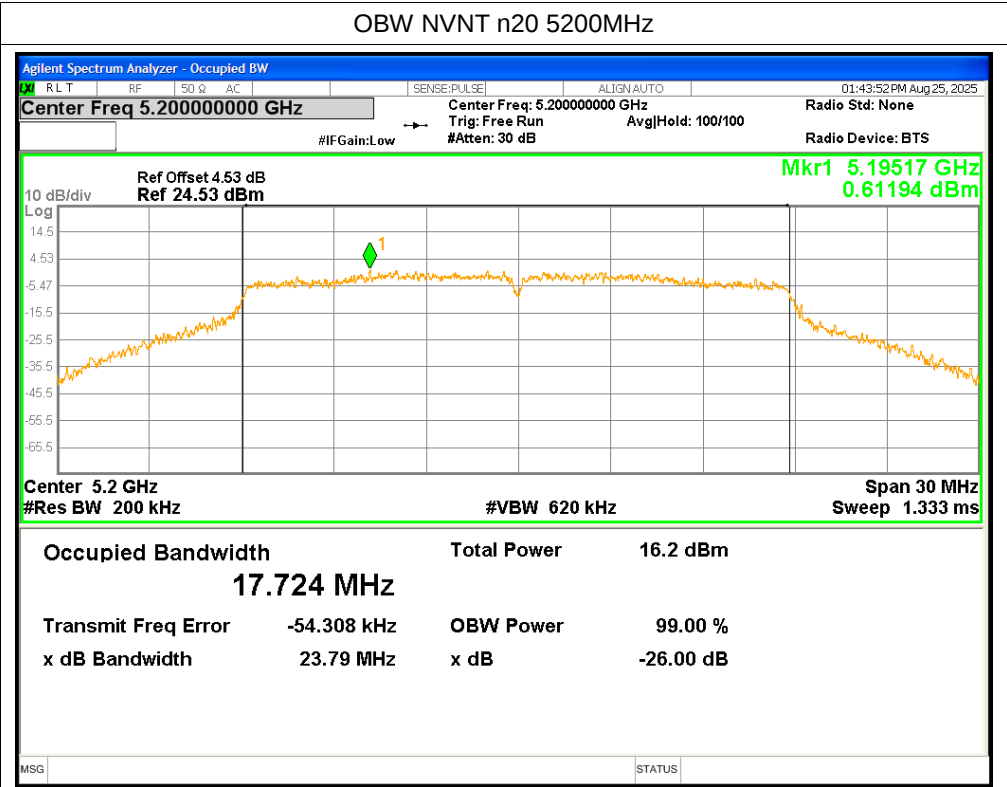

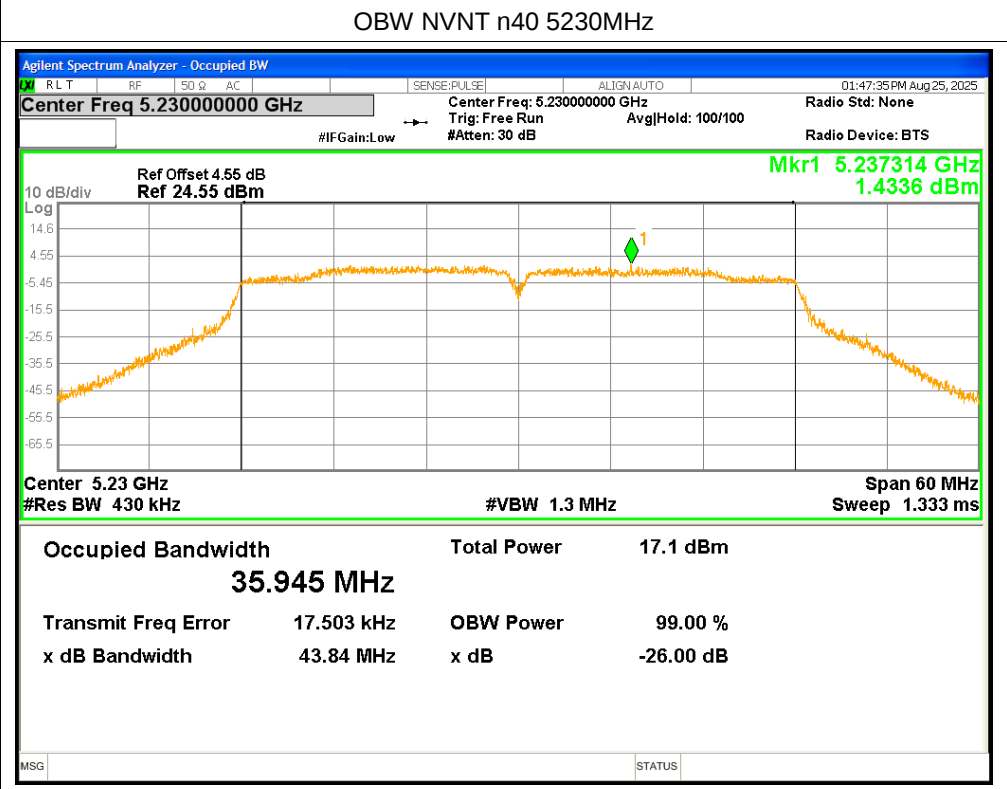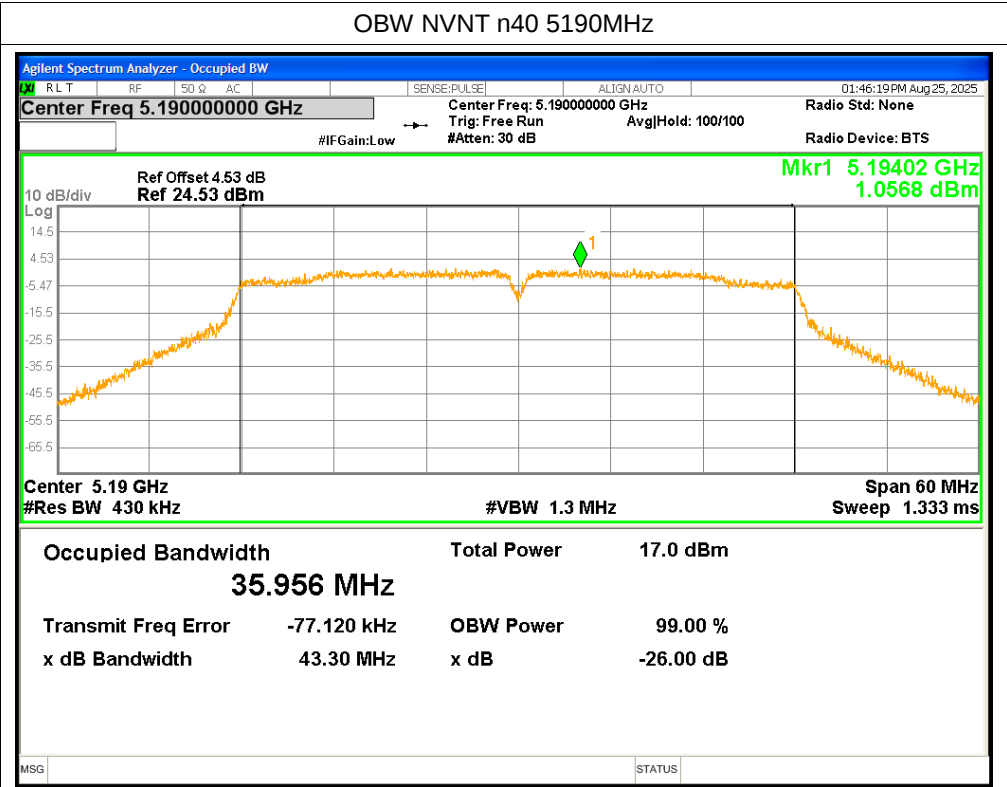

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	0.61	0.61	<=11	Pass
NVNT	a	5200	0.461	0.461	<=11	Pass
NVNT	a	5240	0.547	0.547	<=11	Pass
NVNT	n20	5180	0.717	0.717	<=11	Pass
NVNT	n20	5200	0.541	0.541	<=11	Pass
NVNT	n20	5240	0.887	0.887	<=11	Pass
NVNT	n40	5190	-1.998	-1.998	<=11	Pass
NVNT	n40	5230	-1.587	-1.587	<=11	Pass

