

# Report on the FCC and IC Testing of the Nuki Home Solutions GmbH

Model: Smart Lock Ultra Article type:  
012.518

In accordance with FCC 47 CFR Part 15 C  
and ISED RSS-247 and ISED RSS-GEN

Prepared for: Nuki Home Solutions GmbH  
Münzgrabenstr. 92/4  
8010 Graz  
Austria

FCC ID: 2BH6T012518  
IC: 32893-012518



Product Service

Add value.  
Inspire trust.

## COMMERCIAL-IN-CONFIDENCE

Date: 2025-06-12

Document Number: TR-713334509-03 | Revision 3

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Alexander Deese	2025-06-12	 SIGN-ID 1051653
Authorised Signatory	Alex Fink	2025-06-12	 SIGN-ID 1051656

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15 C and ISED RSS-247 and RSS-GEN.

The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Alexander Deese	2025-06-12	 SIGN-ID 1051653

Laboratory Accreditation  
DAkkS Reg. No. D-PL-11321-11-03  
DAkkS Reg. No. D-PL-11321-11-04

Laboratory recognition  
Registration No. BNetzA-CAB-16/21-15

Industry Canada test site registration  
3050A-2

### Executive Statement:

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15 C:2023 and ISED RSS247 Issue 3: 2023 and RSS-GEN Issue 5 Amd. 1 : 2019, Amd. 2 : 2021

#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2025 TÜV SÜD Product Service.

Trade Register Munich  
HRB 85742  
VAT ID No. DE129484267  
Information pursuant to Section 2(1)  
DL-InfoV (Germany) at  
[www.tuv sud.com/imprint](http://www.tuv sud.com/imprint)

Managing Directors:  
Walter Reithmaier (Sprecher / CEO)  
Patrick van Welij

Phone: +49 (0) 9421 56 82-0  
Fax: +49 (0) 9421 56 82-199  
[www.tuv sud.com](http://www.tuv sud.com)

TÜV SÜD Product Service GmbH  
Äußere Frühlingstraße 45  
94315 Straubing  
Germany



## Content

1	Report Summary.....	2
1.1	Modification Report.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results.....	3
1.4	Product Information.....	4
1.5	Test Configuration .....	4
1.6	Modes of Operation .....	5
1.7	Deviations from Standard .....	5
1.8	EUT Modifications Record.....	6
1.9	Test Location .....	6
2	Test Details.....	7
2.1	Emission Bandwidth .....	7
2.2	Output Power.....	21
2.3	Power Spectral Density .....	25
2.4	Frequency Band Edge .....	33
2.5	Spurious emissions .....	41
2.6	Temperature Stability .....	58
3	Measurement Uncertainty .....	62
	TR-713334509-03 rev0 (FCC) Annex A: Test setup photos	4 pages
	TR-713334509-01 rev0 (FCC) Annex B: External photos	2 pages
	TR-713334509-01 rev0 (FCC) Annex C: Internal photos	4 pages



# 1 Report Summary

## 1.1 Modification Report

Alternations and additions of this report will be issued to the holders of each copy in the form of a complete document.

Revision	Description of changes	Date of Issue
0	First Issue	2025-02-03
1	FCC ID and IC added	2025-03-11
2	Instrument settings added to chapters 2.1.7, 2.2.7, 2.3.7, 2.4.7 and 2.5.7. Specific test method section added to chapters 2.2.6, 2.3.6 and 2.4.6.	2025-04-24
3	Statement about worst case added, chapter 2.5.7	2025-06-12

Table 1: Report of Modifications

## 1.2 Introduction

Applicant	Nuki Home Solutions GmbH
Manufacturer	Nuki Home Solutions GmbH
Model Number(s)	Smart Lock Ultra Article type: 012.518
Serial Number(s)	---
Hardware Version(s)	---
Software Version(s)	---
Number of Samples Tested	1
Test Specification(s) /	FCC 47 CFR Part 15 C : 2023
Issue / Date	ISED RSS-247, Issue 3 : 2023
Test Plan/Issue/Date	ISED RSS-GEN, Issue 5, Amd. 1 : 2019, Amd. 2 : 2021
Order Number	102573
Date	2024-03-29
Date of Receipt of EUT	2024-08-26
Start of Test	2024-08-27
Finish of Test	2024-09-05
Name of Engineer(s)	Alexander Deese
Related Document(s)	ANSI C63.4: 2014 ANSI C63.10: 2013 FCC 47 CFR Part 2 J : 2023 KDB 558074 D01 V05R02 ISED RSS-102, Issue 6, 2023



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15 C, ISED RSS-247 and ISED RSS-GEN is shown below.

Section	Specification Clause	Test Description	Result
---	15.203, 15.247(b)	Antenna requirement	N/T
2.1	15.247(a)(2)	Emission Bandwidth	Pass
2.2	15.247(b)(3)	Output Power	Pass
2.3	15.247(e)	Power Spectral Density	Pass
2.4	15.247(d)	Frequency Band Edge	Pass
2.5	15.247(d), 15.205, 15.209	Spurious Emissions	Pass
---	15.207	Conducted Emissions on Mains Terminals	N/T

Table 2: Results according to FCC 47 CFR Part 15 C

Section	Specification Clause	Test Description	Result
2.1	5.2 a	Emission Bandwidth	Pass
2.2	5.4 d	Output Power	Pass
2.3	5.2 b	Power Spectral Density	Pass
2.4	5.5	Frequency Band Edge	Pass
2.5	5.5	Spurious Emissions	Pass

Table 3: Results according to ISED RSS-247

Section	Specification Clause	Test Description	Result
2.1	6.7	Emission Bandwidth	Pass
2.5	8.9, 8.10	Spurious Emissions	Pass
2.6	8.11	Frequency Stability	Pass
---	8.8	Conducted Emissions on Mains Terminals	Pass

Table 4: Results according to RSS-Gen



## 1.4 Product Information

### 1.4.1 Technical Description

#### Nuki Smart Lock

The Nuki Smart Lock motorizes most standard door locks and creates a digital access system when combined with a smartphone.

The Nuki Smart Lock is placed on the inside of the door using the included Nuki Universal Cylinder (Ultra variant) or on the existing cylinder with the key inserted (Pro Variant). The locking mechanism is turned by the motor of the Nuki Smart Lock. Even if a Nuki Smart Lock is installed, the lock can be turned manually.

The Nuki Smart Lock contains a wi-fi module, which allows connectivity to the Nuki Smart Lock via the Internet. The Nuki Smart Lock system can be set up in such a way as to allow access online and connection to other smart home products. See also below "Wi-Fi Module."

The Nuki Smart Lock has a built-in Lithium Polymer (Ultra variant) or Lithium Ion (Pro variant) battery that can be charged using the charging cable (which is included with the set) and a suitable USB-C charger (which is not included with the set).

*Frequency Band:* 2400.0 MHz – 2483.5 MHz

*Supply Voltage:* 11.1 V (Ultra)

14.8 V (Pro)

*Supply Frequency:* DC, battery powered

*Antenna Gain:* 2.62 dBi

*Temperature Range:* 10 °C – 40 °C

## 1.5 Test Configuration

The EUT was battery powered. Channel and power were configured via test software provided by the customer.



## 1.6 Modes of Operation

**Mode 1:**

802.11b, Ch 1, 2412 MHz, 20 MHz, 7 dB Backoff, 1 Mbps

**Mode 2:**

802.11b, Ch 7, 2442 MHz, 20 MHz, 7 dB Backoff, 1 Mbps

**Mode 3:**

802.11b, Ch 11, 2462 MHz, 20 MHz, 7 dB Backoff, 1 Mbps

**Mode 4:**

802.11g, Ch 1, 2412 MHz, 20 MHz, 7 dB Backoff, 6 Mbps

**Mode 5:**

802.11g, Ch 7, 2442 MHz, 20 MHz, 7 dB Backoff, 6 Mbps

**Mode 6:**

802.11g, Ch 11, 2462 MHz, 20 MHz, 7 dB Backoff, 6 Mbps

**Mode 7:**

802.11n, Ch 1, 2412 MHz, 20 MHz, 7 dB Backoff, MCS0

**Mode 8:**

802.11n, Ch 7, 2442 MHz, 20 MHz, 7 dB Backoff, MCS0

**Mode 9:**

802.11n, Ch 11, 2462 MHz, 20 MHz, 7 dB Backoff, MCS0

## 1.7 Deviations from Standard

---



## 1.8 EUT Modifications Record

The table below details modifications made to the EUT during the test program.  
The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 5

## 1.9 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing test laboratory:

Test Name	Name of Engineer(s)
Configuration according to 1.5 and 1.6	
Emission Bandwidth	Alexander Deese
Output Power	Alexander Deese
Power Spectral Density	Alexander Deese
Frequency Band Edge	Alexander Deese
Spurious Emissions	Alexander Deese
Temperature Stability	Alexander Deese

**Office Address:**

Äußere Frühlingstraße 45  
94315 Straubing  
Germany



## 2 Test Details

### 2.1 Emission Bandwidth

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(a)(2)

ISED RSS-247, Clause 5.2 a

ISED RSS-Gen, Clause 6.7

#### 2.1.2 Equipment under Test and Modification State

Smart Lock Ultra Article type: 012.518; S/N ---; Modification state 0

#### 2.1.3 Date of Test

2024-09-04 to 2024-09-05

#### 2.1.4 Environmental Conditions

Ambient Temperature	25 °C
Relative Humidity	54 %

#### 2.1.5 Specification Limits

For systems using digital modulation techniques, operating in the 902 MHz – 928 MHz, 2400 MHz – 2483.5 MHz and/or 5725 MHz – 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz

##### ISED RSS-GEN:

The occupied (99 %) bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSS.

#### 2.1.6 Test Method

The test was performed according to ANSI C63.10, clauses 6.9.3 and 11.8.1




## 2.1.7 Test Results

Mode	Frequency Channel	6 dB Bandwidth (MHz)	Limit (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
1	1	8.150000	0.500	2407.925000	2416.075000
2	7	7.150000	0.500	2438.425000	2445.575000
3	11	8.150000	0.500	2457.925000	2466.075000
4	1	15.200000	0.500	2404.425000	2419.625000
5	7	15.200000	0.500	2434.425000	2449.625000
6	11	15.200000	0.500	2454.425000	2469.625000
7	1	15.200000	0.500	2404.425000	2419.625000
8	7	15.200000	0.500	2434.425000	2449.625000
9	11	15.200000	0.500	2454.425000	2469.625000

Table 6: 6 dB bandwidth


Instrument Settings	Instrument Value	Target Value
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	56.836 µs	AUTO
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

6 dB Bandwidth

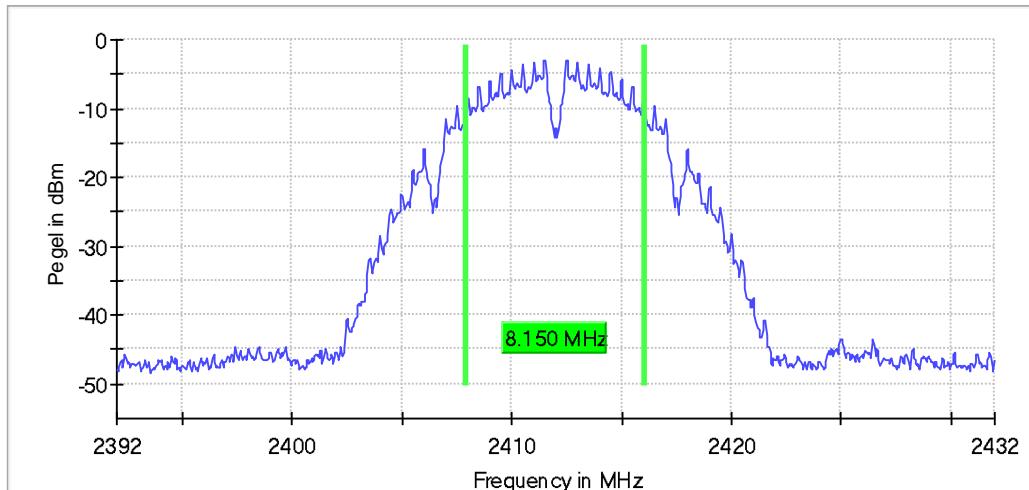


**Mode 1**

6 dB Bandwidth

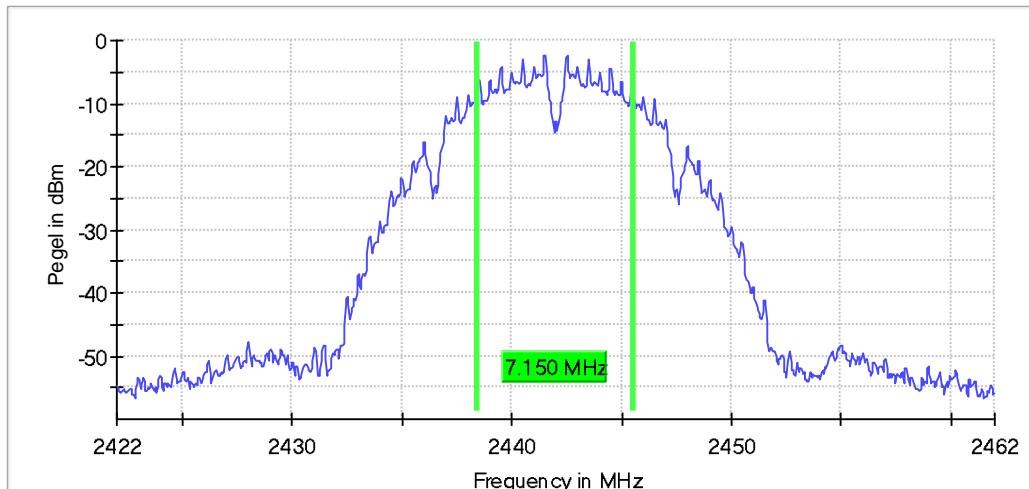


**Mode 2**

6 dB Bandwidth

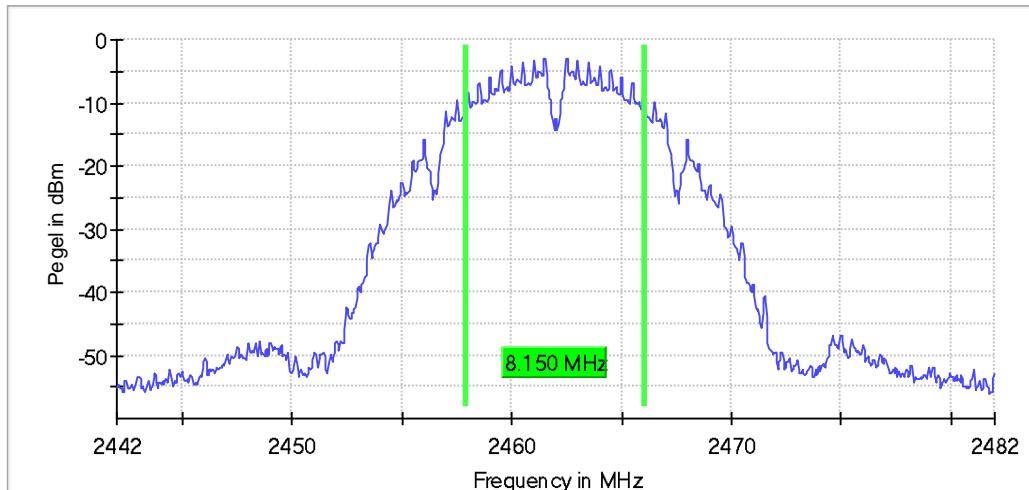


**Mode 3**

6 dB Bandwidth

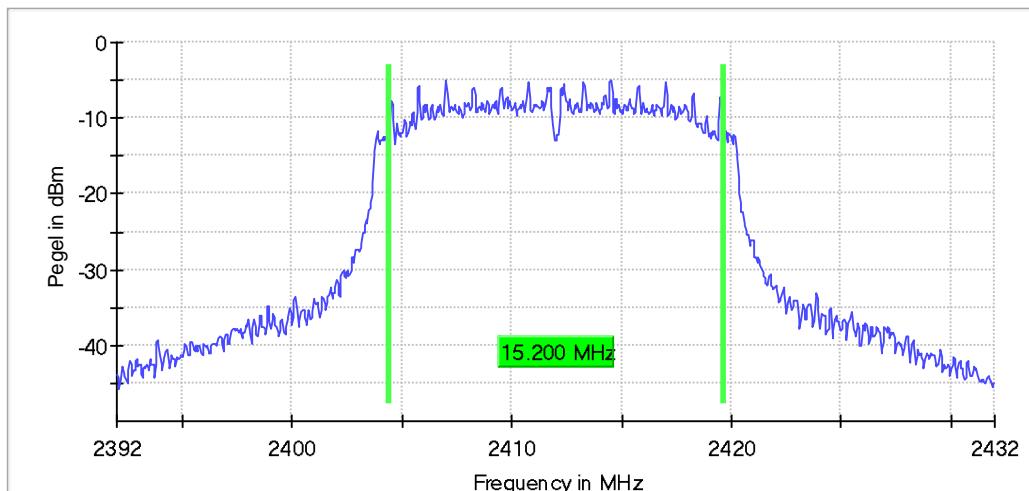


**Mode 4**

6 dB Bandwidth

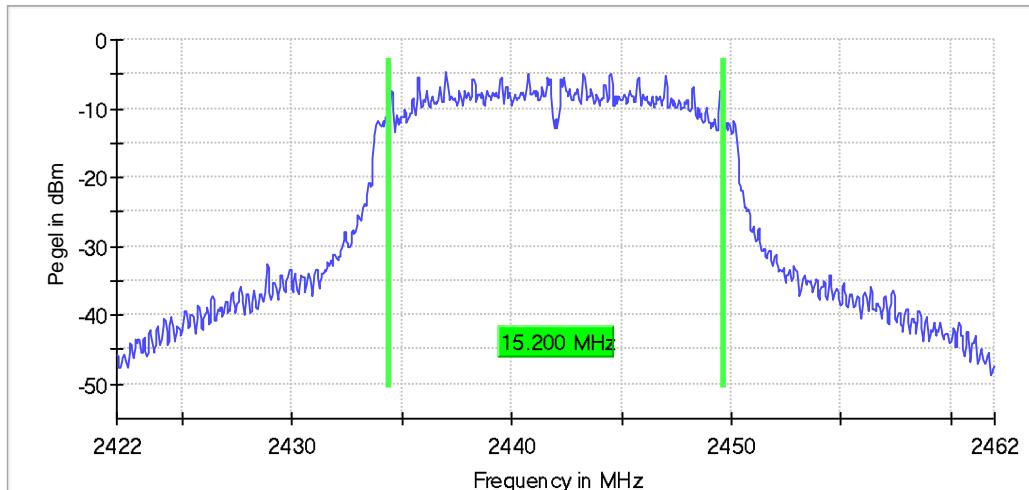

**Mode 5**


6 dB Bandwidth

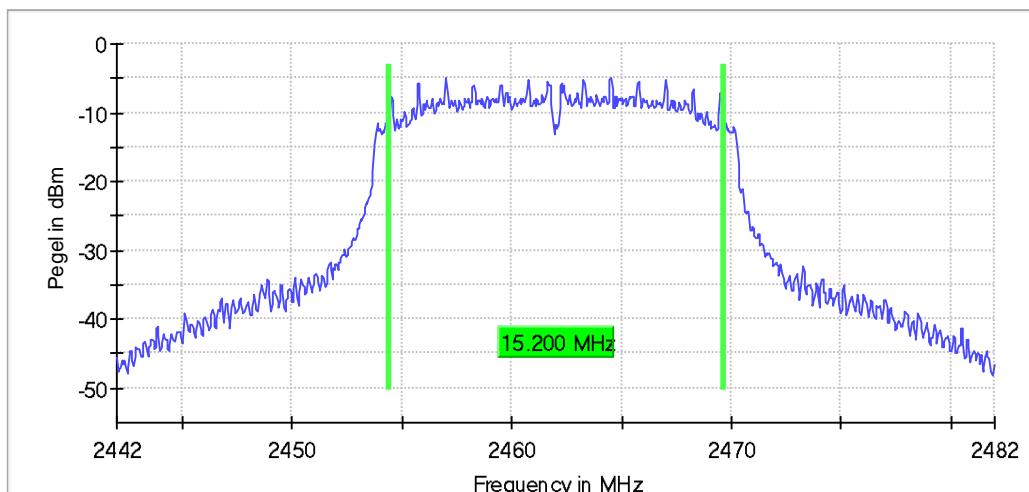


**Mode 6**



**Mode 7**

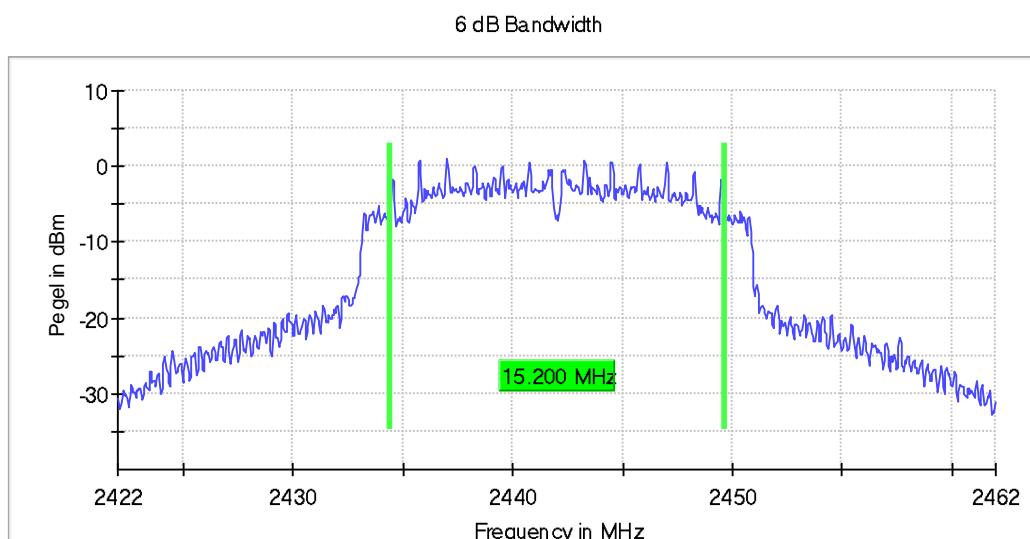

**Mode 8**

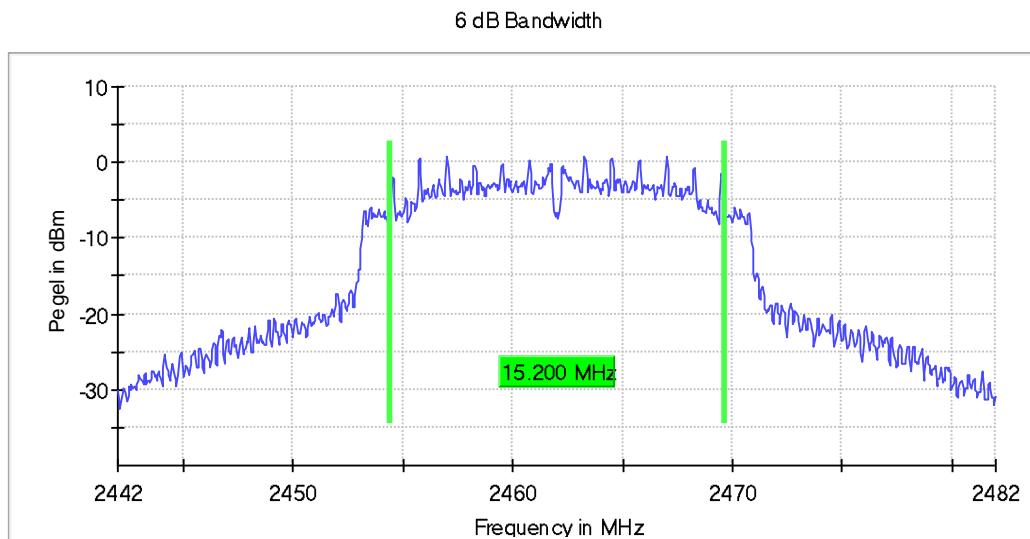




Mode	Frequency Channel	99% Bandwidth (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
1	1	12.500000	2405.750000	2418.250000
2	7	12.500000	2435.750000	2448.250000
3	11	12.500000	2455.750000	2468.250000
4	1	16.500000	2403.750000	2420.250000
5	7	16.400000	2433.850000	2450.250000
6	11	16.400000	2453.850000	2470.250000
7	1	20.200000	2401.950000	2422.150000
8	7	20.600000	2431.450000	2452.020000
9	11	20.000000	2451.950000	2471.950000

Table 7: 99% bandwidth


Instrument Settings	Instrument Value	Target Value
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

99 %Bandwidth

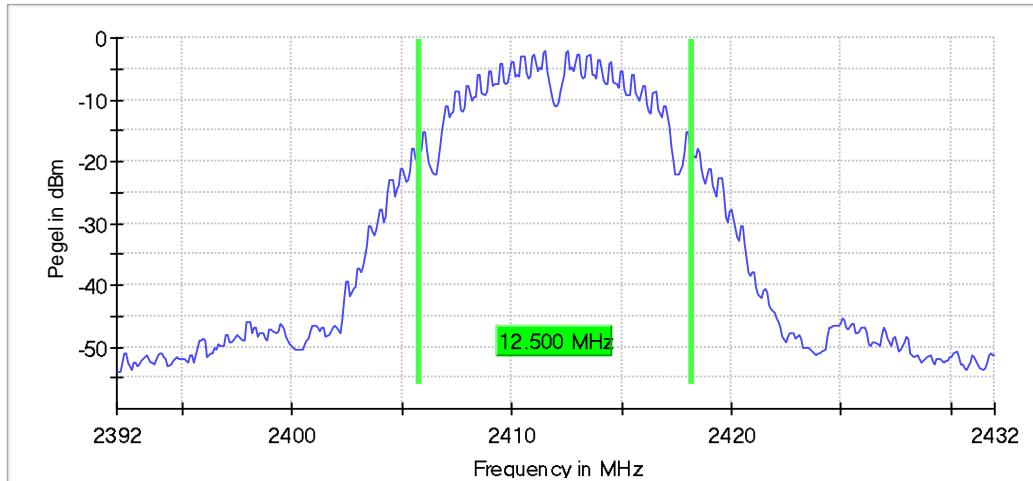


**Mode 1**

99 %Bandwidth

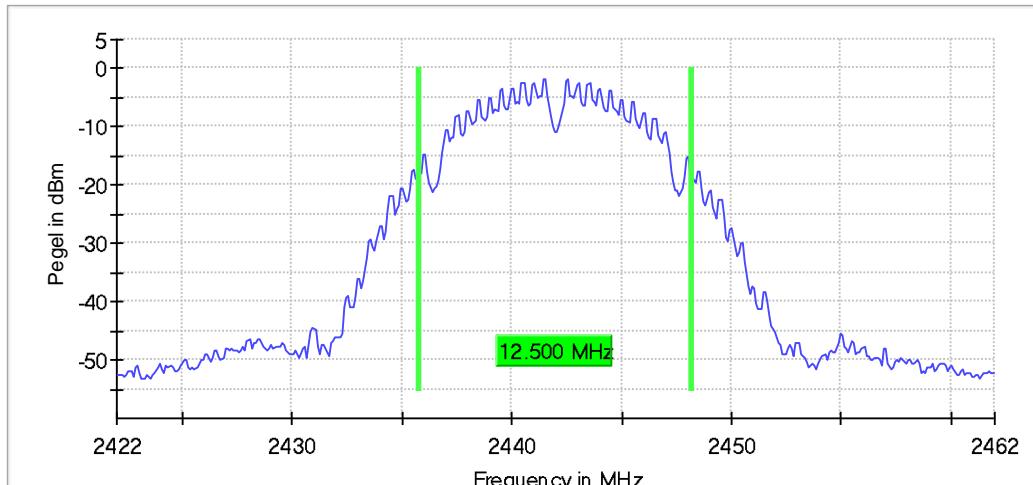


**Mode 2**

99 %Bandwidth

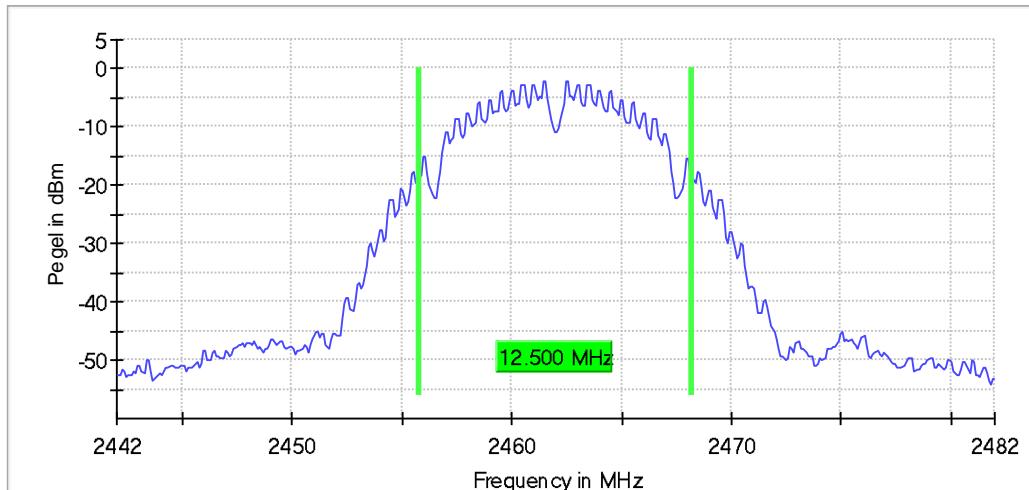


**Mode 3**

99 %Bandwidth

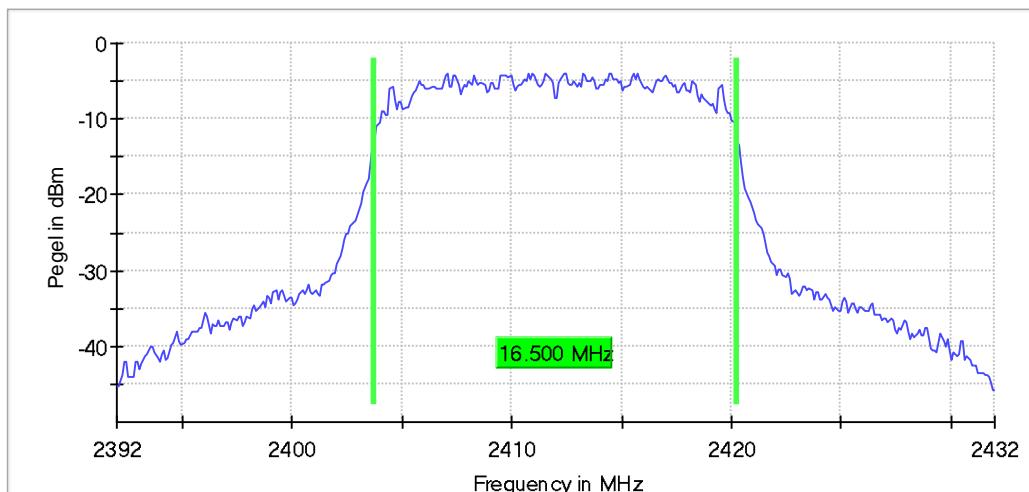


**Mode 4**

99 %Bandwidth

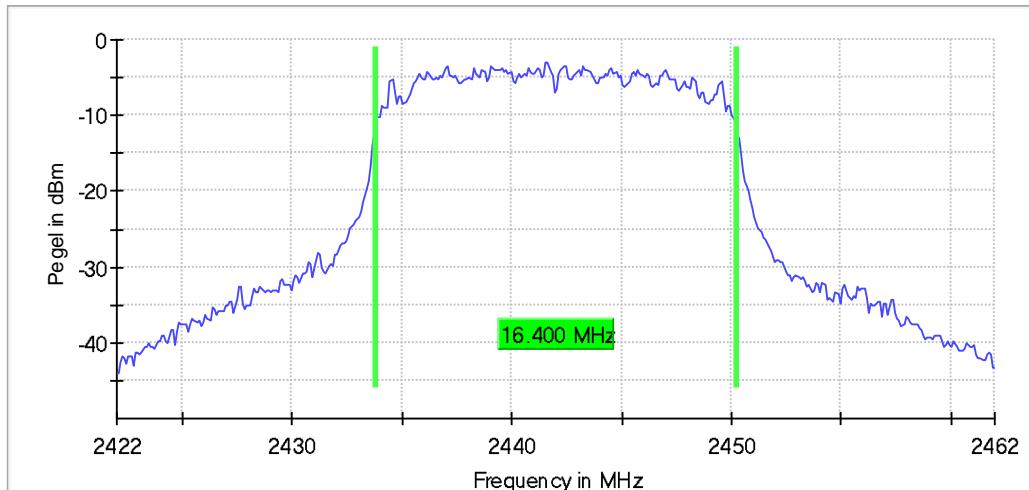


**Mode 5**

99 %Bandwidth

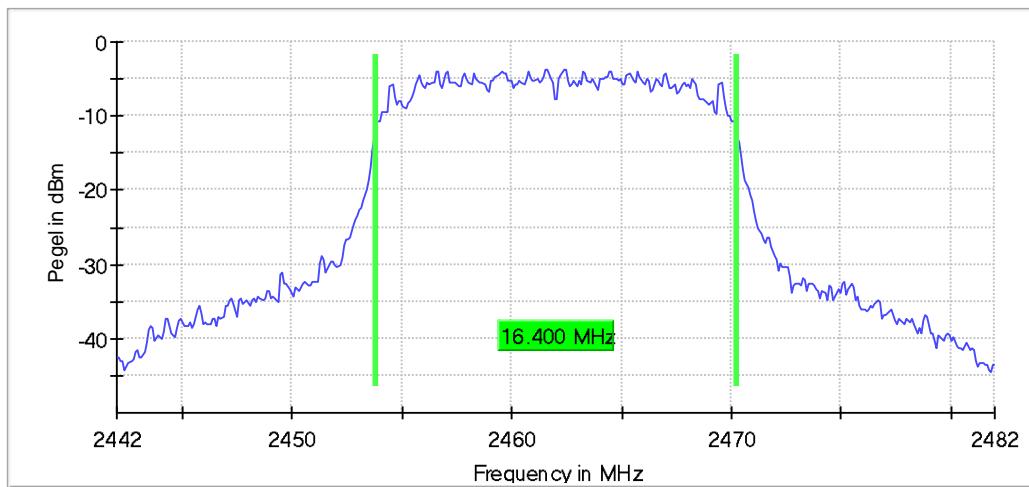


**Mode 6**

99 %Bandwidth

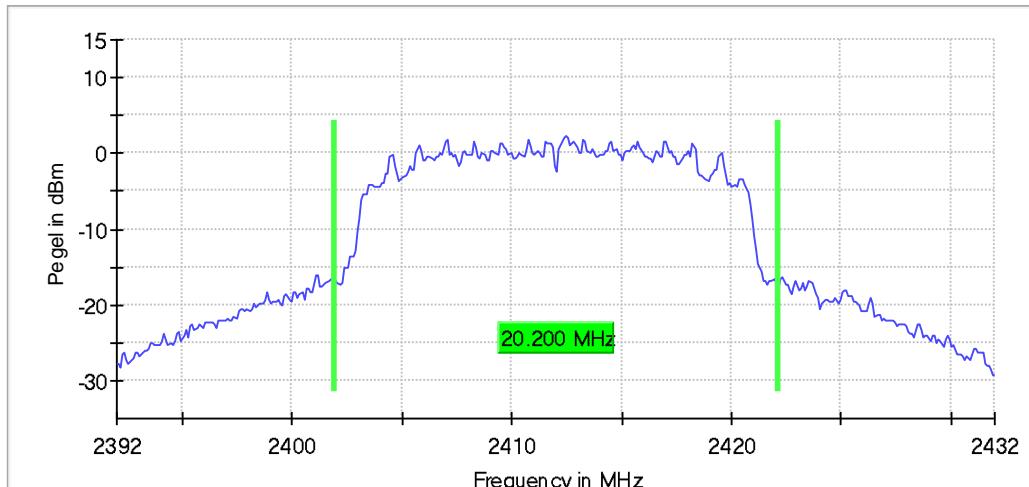

Mode 7

99 %Bandwidth

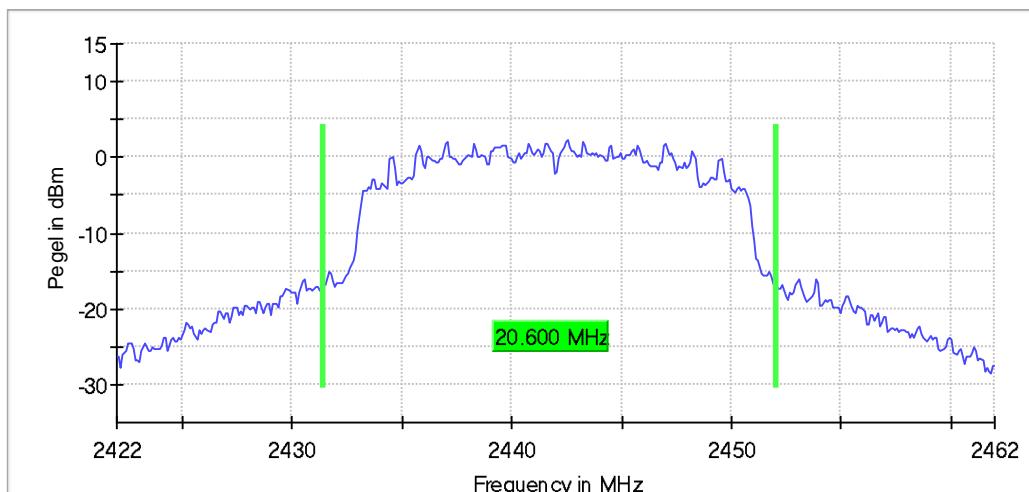

Mode 8





## 2.1.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra-tion Pe-riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 8



## 2.2 Output Power

### 2.2.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(b)(3)  
ISED RSS-247, Clause 5.4 d

### 2.2.2 Equipment under Test and Modification State

Smart Lock Ultra Article type: 012.518; S/N ---; Modification state 0

### 2.2.3 Date of Test

2024-09-04 to 2024-09-05

### 2.2.4 Environmental Conditions

Ambient Temperature	25 °C
Relative Humidity	54 %

### 2.2.5 Specification Limits

The maximum conducted output power shall not exceed 1 W (30 dBm).  
The e.i.r.p. shall not exceed 4 W (36 dBm).

### 2.2.6 Test Method

The test was performed according to ANSI C63.10, section 11.9, specifically 11.9.2



## 2.2.7 Test Results

Mode	Frequency Channel	Detector	Conducted Output Power (dBm)	Limit (dBm)
1	1	RMS	8.303	30.0
2	7	RMS	8.548	30.0
3	11	RMS	8.453	30.0
4	1	RMS	9.399	30.0
5	7	RMS	9.775	30.0
6	11	RMS	9.578	30.0
7	1	RMS	9.039	30.0
8	7	RMS	9.328	30.0
9	11	RMS	9.152	30.0


Table 9: Conducted Output Power

Mode	Frequency Channel	Detector	EIRP (dBm)	Limit (dBm)
1	1	RMS	10.9	36.0
2	7	RMS	11.2	36.0
3	11	RMS	11.1	36.0
4	1	RMS	12.0	36.0
5	7	RMS	12.4	36.0
6	11	RMS	12.2	36.0
7	1	RMS	11.7	36.0
8	7	RMS	11.9	36.0
9	11	RMS	11.8	36.0

Table 10: EIRP



Instrument Settings	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 $\mu$ s	1.000 $\mu$ s

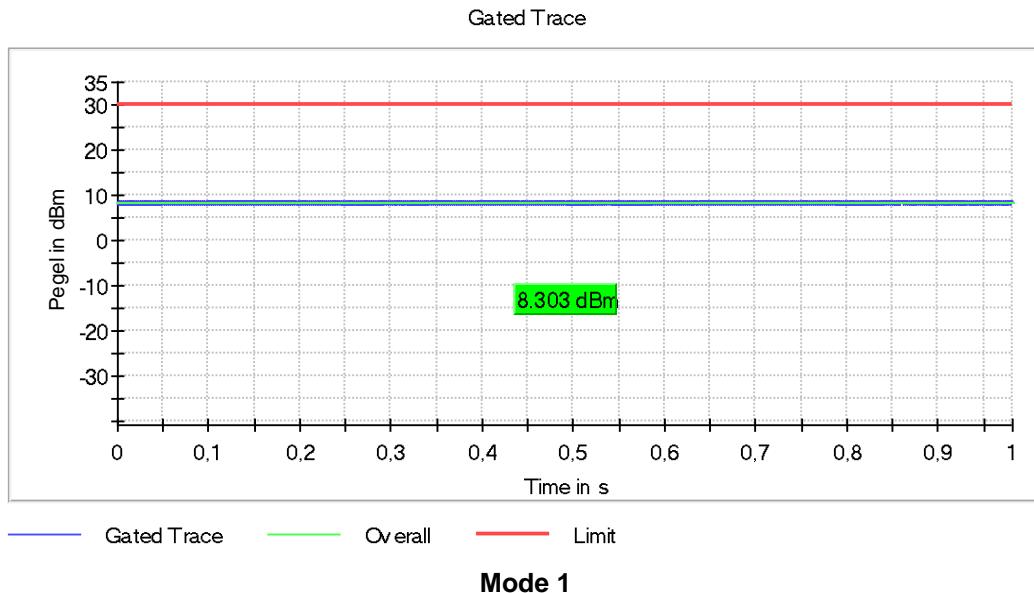



## 2.2.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra-tion Pe-riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 11



## 2.3 Power Spectral Density

### 2.3.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(e)  
ISED RSS-247, Clause 5.2 b

### 2.3.2 Equipment under Test and Modification State

Smart Lock Ultra Article type: 012.518; S/N ---; Modification state 0

### 2.3.3 Date of Test

2024-09-04 to 2024-09-05

### 2.3.4 Environmental Conditions

Ambient Temperature	25 °C
Relative Humidity	54 %

### 2.3.5 Specification Limits

FCC 47 CFR, section 15.257(e)

ISED RSS-247, Clause 5.2.(b)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

The same method (detector) of determining the conducted output power shall be used to determine the power spectral density.

### 2.3.6 Test Method

The test was performed according to ANSI C63.10, section 11.10, specifically 11.10.3




### 2.3.7 Test Results

Mode	Frequency Channel	Detector	Spectral Power Density (dBm)	Limit (dBm)
1	1	RMS	-6.152	8.0
2	7	RMS	-5.616	8.0
3	11	RMS	-6.110	8.0
4	1	RMS	-8.123	8.0
5	7	RMS	-8.293	8.0
6	11	RMS	-8.522	8.0
7	1	RMS	-8.251	8.0
8	7	RMS	-7.700	8.0
9	11	RMS	-8.301	8.0


Table 12: Spectral Power Density

Instrument Settings	Instrument Value	Target Value
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweeptime	12.000 ms	12.000 ms
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off


Power Spectral Density

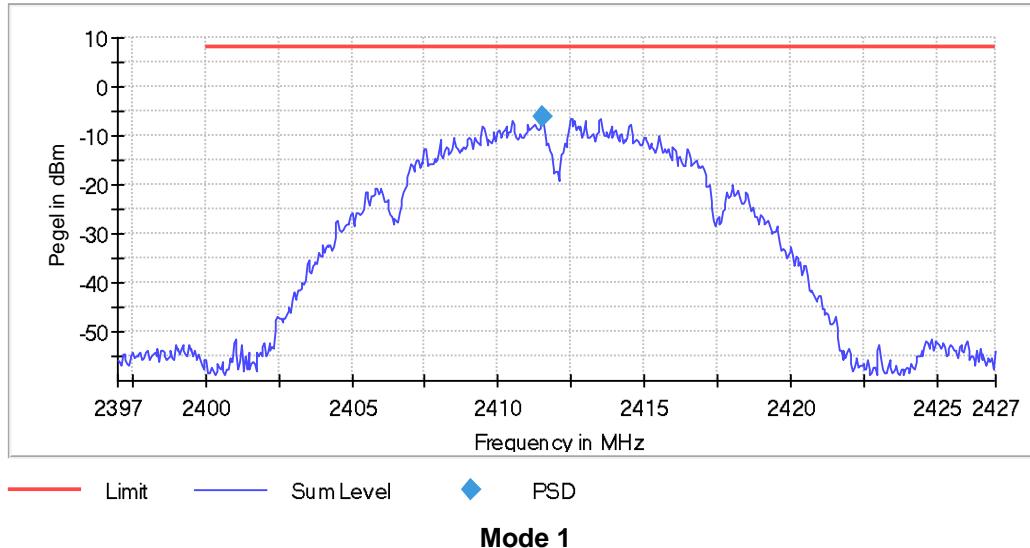


Power Spectral Density

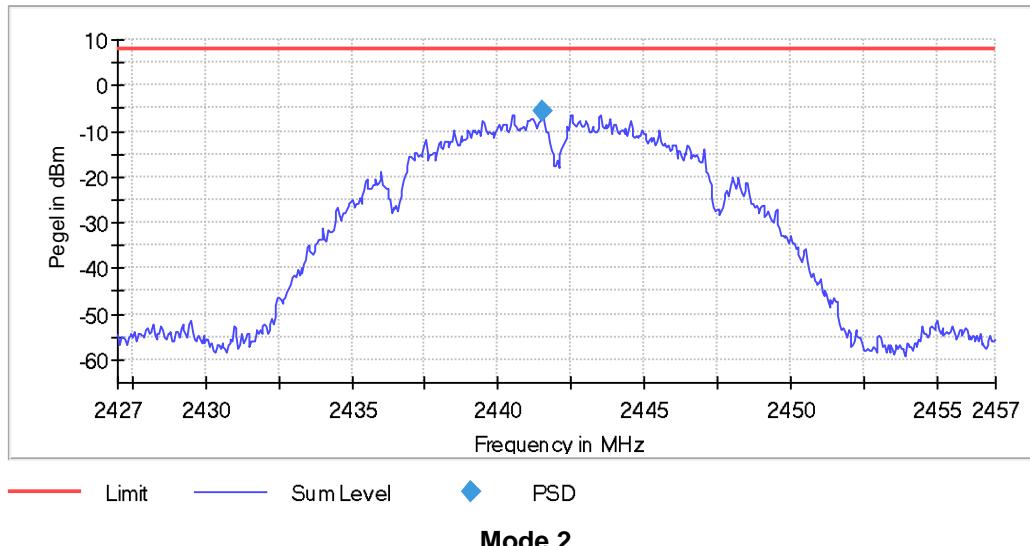


Power Spectral Density

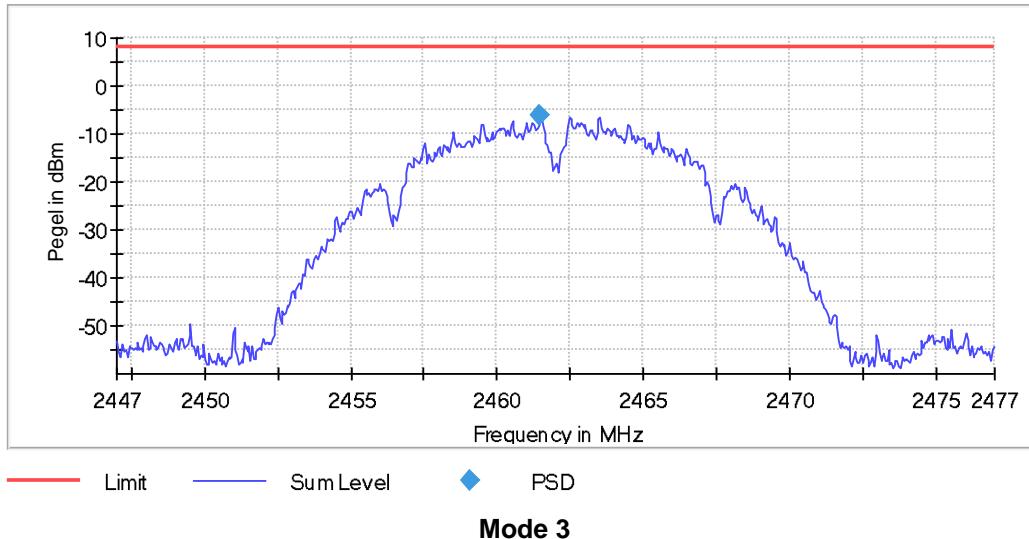


Power Spectral Density

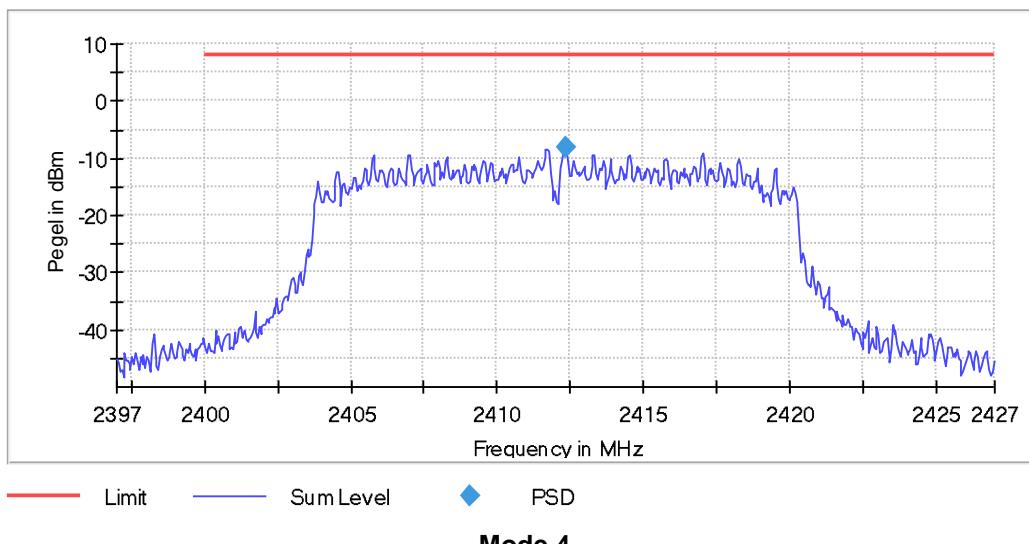


Power Spectral Density

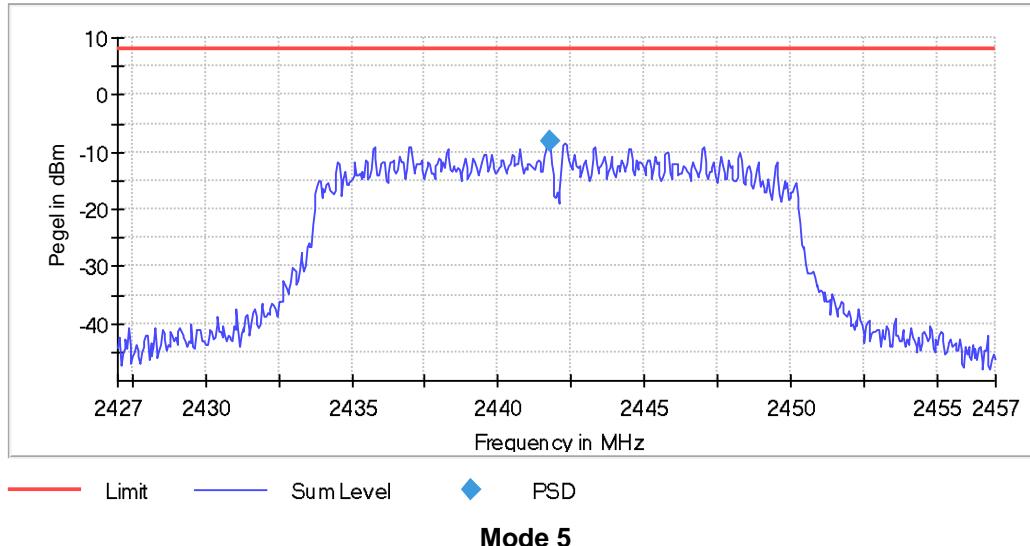


Power Spectral Density

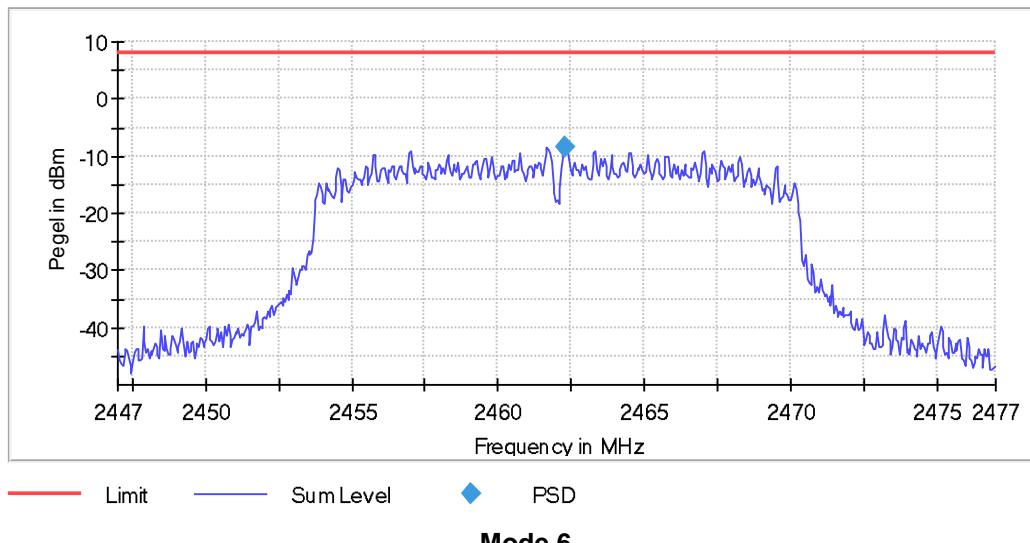


Power Spectral Density

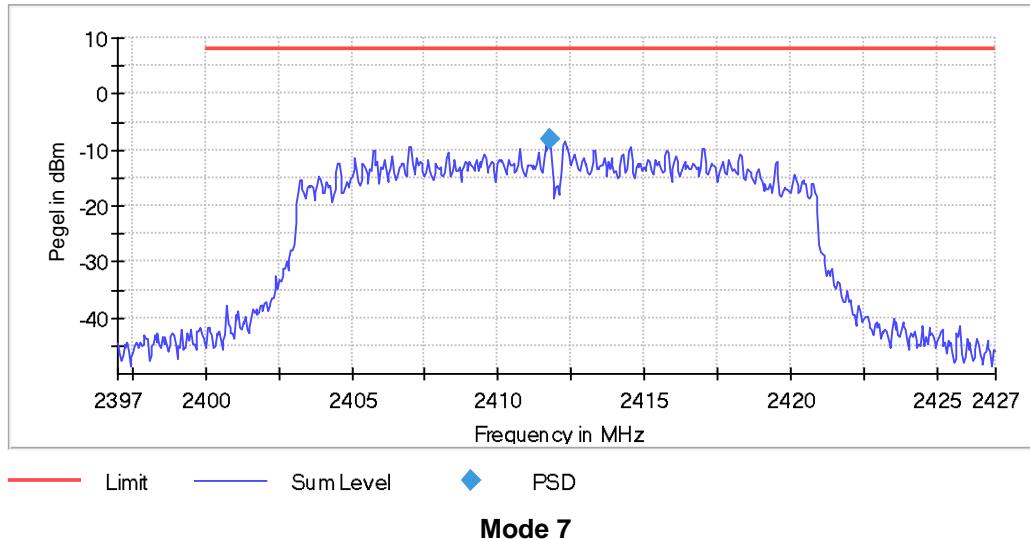

Power Spectral Density

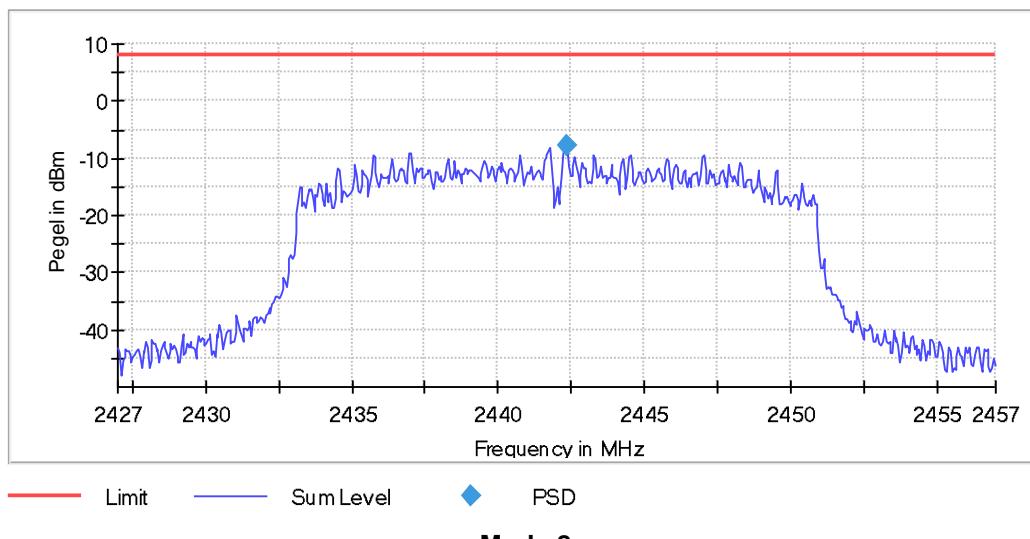

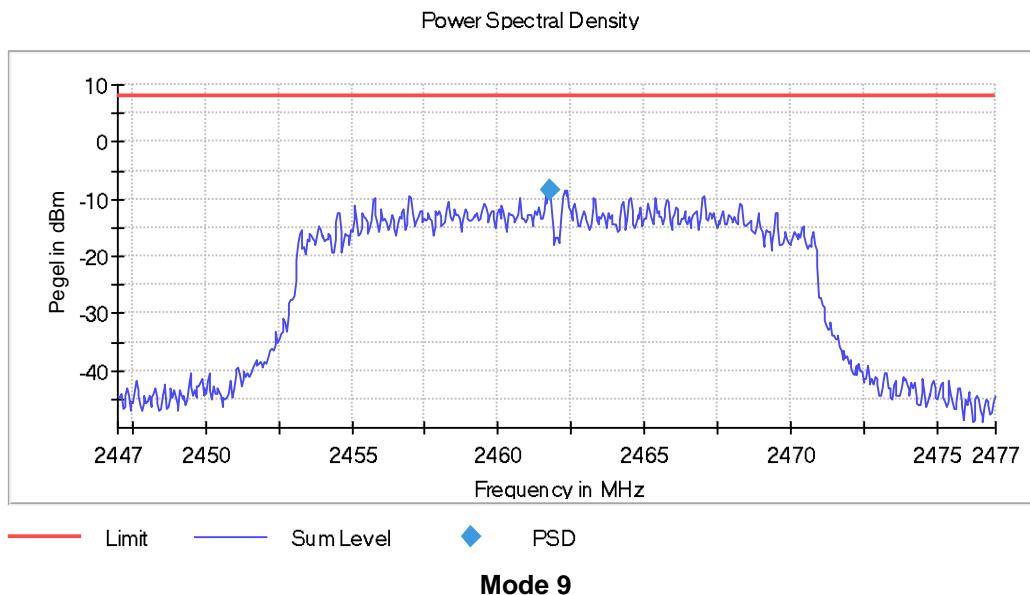



### 2.3.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra-tion Pe-riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 13



## 2.4 Frequency Band Edge

### 2.4.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.247(d)  
ISED RSS-247, Clause 5.5

### 2.4.2 Equipment under Test and Modification State

Smart Lock Ultra Article type: 012.518; S/N ---; Modification state 0

### 2.4.3 Date of Test

2024-09-04 to 2024-09-05

### 2.4.4 Environmental Conditions

Ambient Temperature	25 °C
Relative Humidity	54 %

### 2.4.5 Specification Limits


In any 100 kHz bandwidth outside the frequency band in which the device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either conducted or radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits is not required.

In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 2.4.6 Test Method


The test was performed according to ANSI C63.10, sections 11.13

## 2.4.7 Test Results

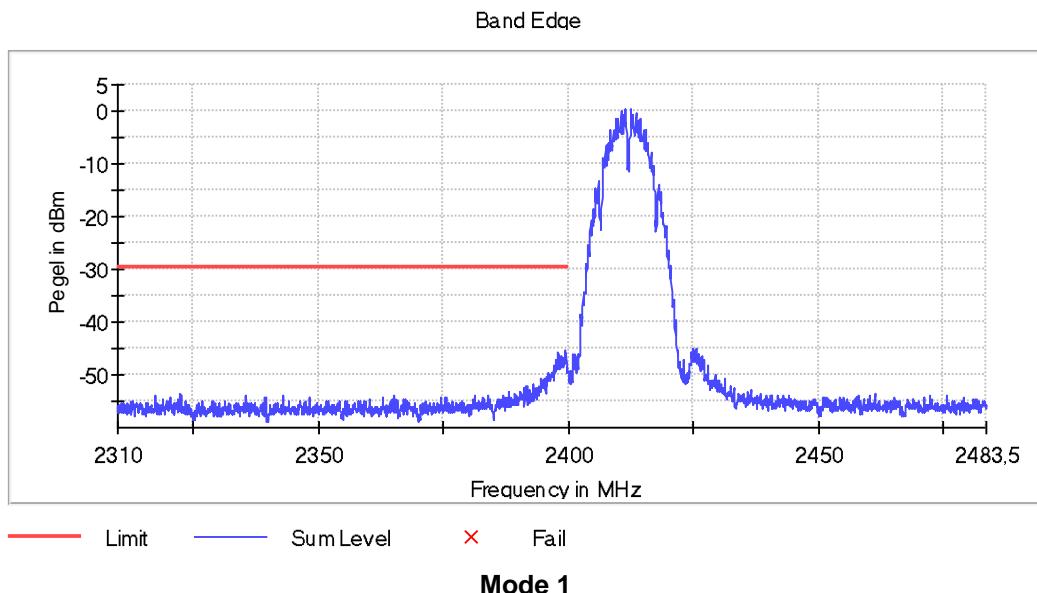


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.475000	-45.5	16.0	-29.5	PASS
2398.025000	-45.5	16.0	-29.5	PASS
2399.525000	-45.6	16.1	-29.5	PASS
2399.325000	-45.6	16.1	-29.5	PASS
2397.975000	-45.6	16.1	-29.5	PASS
2399.275000	-45.7	16.2	-29.5	PASS
2398.075000	-46.5	17.0	-29.5	PASS
2398.475000	-46.5	17.0	-29.5	PASS
2398.525000	-46.8	17.2	-29.5	PASS
2398.625000	-46.9	17.4	-29.5	PASS
2398.975000	-47.0	17.4	-29.5	PASS
2397.525000	-47.0	17.5	-29.5	PASS
2399.025000	-47.0	17.5	-29.5	PASS
2398.575000	-47.0	17.5	-29.5	PASS
2399.375000	-47.1	17.6	-29.5	PASS

Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

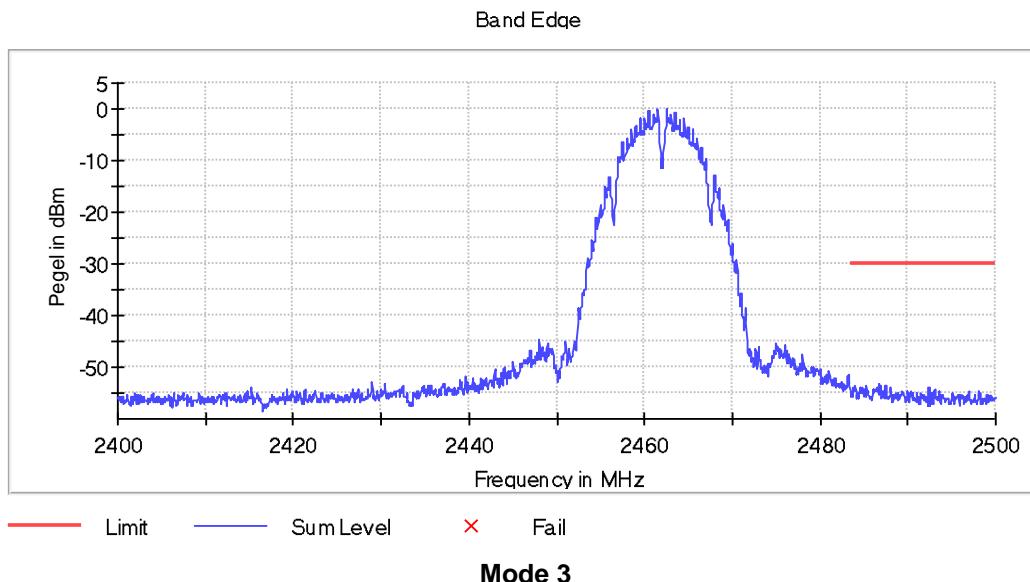


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2486.725000	-53.0	23.2	-29.8	PASS
2483.975000	-53.5	23.6	-29.8	PASS
2487.475000	-53.5	23.7	-29.8	PASS
2484.025000	-53.7	23.8	-29.8	PASS
2486.675000	-53.7	23.8	-29.8	PASS
2487.425000	-53.7	23.8	-29.8	PASS
2485.325000	-53.7	23.8	-29.8	PASS
2486.875000	-53.7	23.9	-29.8	PASS
2485.275000	-53.8	23.9	-29.8	PASS
2484.825000	-53.8	23.9	-29.8	PASS
2486.825000	-53.9	24.0	-29.8	PASS
2484.575000	-53.9	24.0	-29.8	PASS
2483.825000	-53.9	24.0	-29.8	PASS
2486.525000	-53.9	24.1	-29.8	PASS
2484.875000	-54.0	24.1	-29.8	PASS

Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

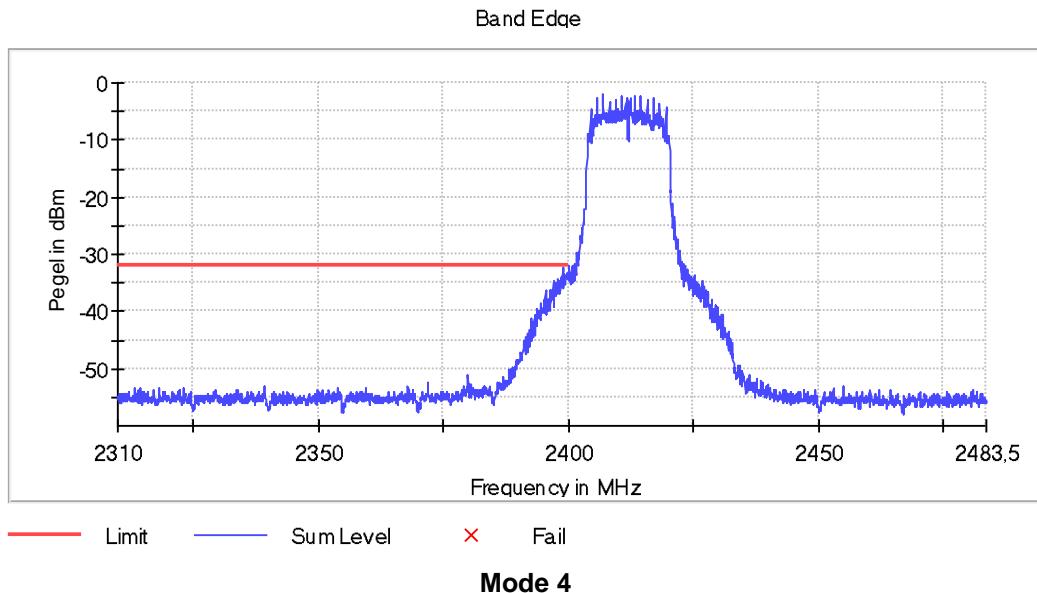


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.875000	-32.4	0.3	-32.1	PASS
2398.925000	-32.6	0.5	-32.1	PASS
2398.825000	-32.9	0.8	-32.1	PASS
2399.875000	-33.2	1.1	-32.1	PASS
2399.125000	-33.3	1.2	-32.1	PASS
2399.775000	-33.4	1.3	-32.1	PASS
2399.175000	-33.4	1.3	-32.1	PASS
2399.825000	-33.4	1.3	-32.1	PASS
2399.725000	-33.5	1.4	-32.1	PASS
2399.525000	-33.8	1.7	-32.1	PASS
2399.275000	-33.9	1.8	-32.1	PASS
2399.225000	-33.9	1.8	-32.1	PASS
2399.625000	-34.0	1.9	-32.1	PASS
2399.475000	-34.0	1.9	-32.1	PASS
2399.675000	-34.0	2.0	-32.1	PASS

Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

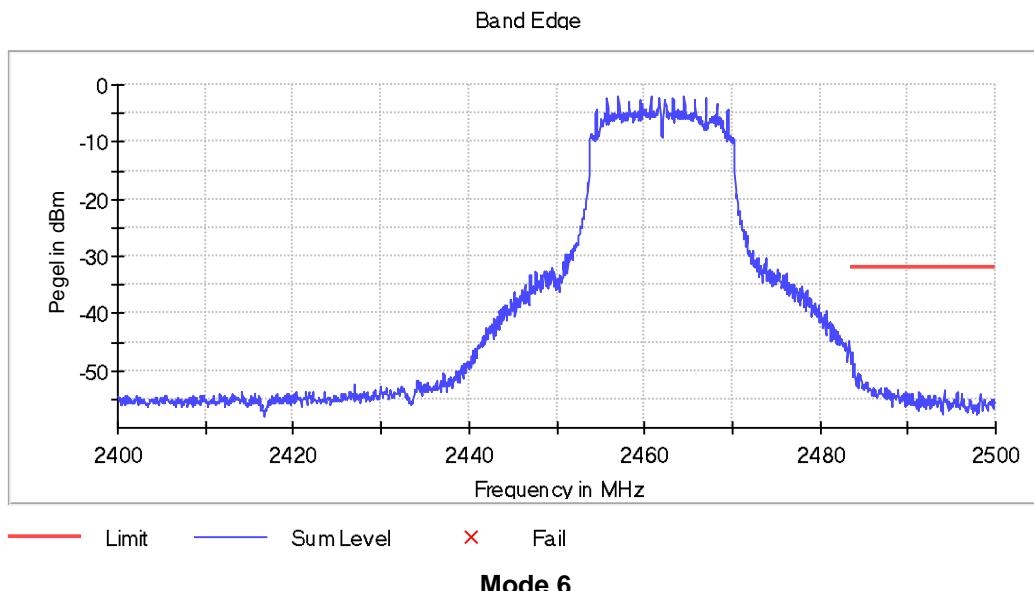


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.625000	-46.7	14.8	-31.8	PASS
2483.575000	-46.8	14.9	-31.8	PASS
2483.675000	-48.0	16.2	-31.8	PASS
2483.875000	-48.7	16.9	-31.8	PASS
2483.525000	-48.9	17.0	-31.8	PASS
2483.925000	-49.1	17.3	-31.8	PASS
2483.825000	-49.3	17.4	-31.8	PASS
2483.975000	-50.3	18.5	-31.8	PASS
2484.275000	-50.5	18.7	-31.8	PASS
2484.575000	-50.6	18.8	-31.8	PASS
2484.025000	-50.8	19.0	-31.8	PASS
2484.325000	-50.9	19.0	-31.8	PASS
2483.725000	-50.9	19.1	-31.8	PASS
2484.525000	-51.0	19.1	-31.8	PASS
2483.775000	-51.0	19.2	-31.8	PASS

Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

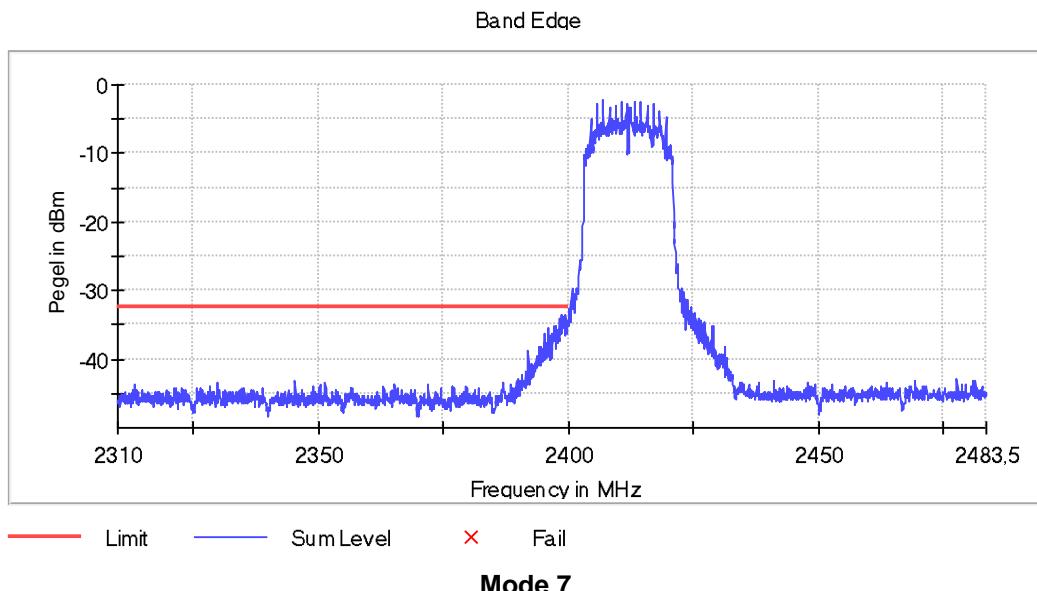

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.625000	-33.4	1.1	-32.3	PASS
2399.475000	-33.5	1.2	-32.3	PASS
2399.525000	-33.5	1.2	-32.3	PASS
2398.575000	-33.6	1.3	-32.3	PASS
2398.525000	-33.7	1.4	-32.3	PASS
2399.125000	-33.9	1.6	-32.3	PASS
2398.675000	-33.9	1.6	-32.3	PASS
2398.225000	-34.0	1.7	-32.3	PASS
2399.175000	-34.1	1.7	-32.3	PASS
2398.275000	-34.1	1.8	-32.3	PASS
2399.875000	-34.2	1.9	-32.3	PASS
2399.825000	-34.3	1.9	-32.3	PASS
2399.925000	-34.3	2.0	-32.3	PASS
2399.775000	-34.6	2.3	-32.3	PASS
2398.875000	-34.7	2.3	-32.3	PASS

Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

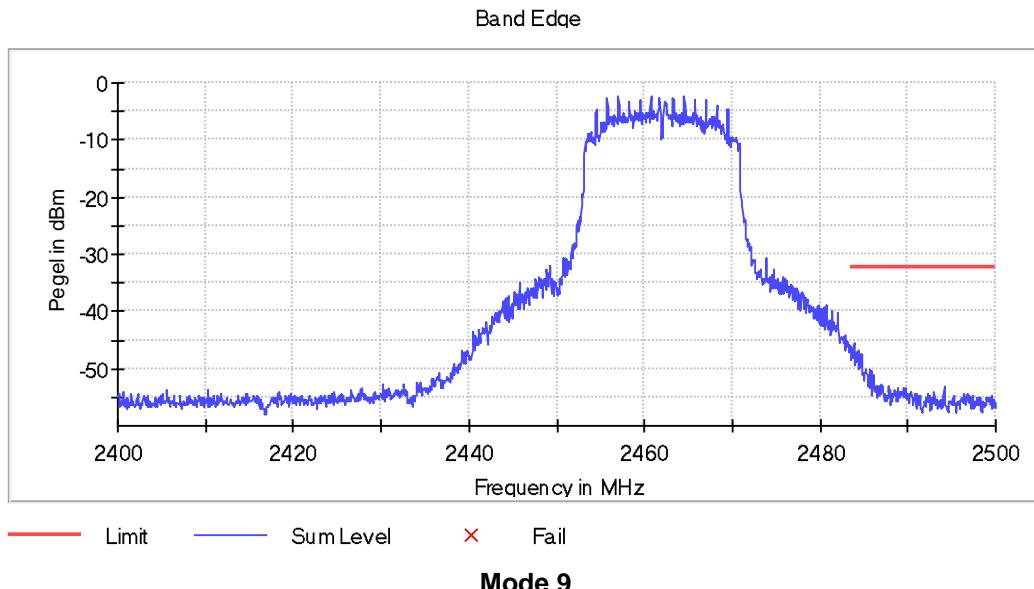

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.875000	-45.5	13.3	-32.2	PASS
2483.925000	-46.3	14.1	-32.2	PASS
2483.825000	-46.4	14.3	-32.2	PASS
2484.375000	-46.8	14.6	-32.2	PASS
2484.125000	-47.0	14.8	-32.2	PASS
2484.325000	-47.2	15.1	-32.2	PASS
2484.425000	-47.3	15.1	-32.2	PASS
2484.675000	-47.4	15.2	-32.2	PASS
2484.725000	-47.5	15.4	-32.2	PASS
2484.175000	-47.7	15.5	-32.2	PASS
2483.625000	-47.9	15.7	-32.2	PASS
2484.275000	-48.0	15.8	-32.2	PASS
2483.675000	-48.0	15.9	-32.2	PASS
2483.575000	-48.1	15.9	-32.2	PASS
2483.775000	-48.1	15.9	-32.2	PASS

Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak



## 2.4.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra-tion Pe-riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 14



## 2.5 Spurious emissions

### 2.5.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.205, 15.209, 15.247(d)

ISED RSS-247, Clause 5.5

ISED RSS-Gen, Clauses 8.9 and 8.10

### 2.5.2 Equipment under Test and Modification State

Smart Lock Ultra Article type: 012.518; S/N ---; Modification state 0

### 2.5.3 Date of Test

2024-09-04 to 2024-09-06

### 2.5.4 Environmental Conditions

Ambient Temperature	25 °C
Relative Humidity	54 %

### 2.5.5 Specification Limits

In any 100 kHz bandwidth outside the frequency band in which the device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either conducted or radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits is not required.

In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.



General radiated emission limits:					
Frequency Range (MHz)	Test distance (m)	Field strength		Field strength	
		( $\mu$ A/m)	(dB $\mu$ A/m)	( $\mu$ V/m)	(dB $\mu$ V/m)
0.009 – 0.49	300	6.37 / $f$	20*lg(6.37 / $f$ )	2400 / $f$	20*lg(2400 / $f$ )
0.49 – 1.705	30	63.7 / $f$	20*lg(63.7 / $f$ )	24000 / $f$	20*lg(24000 / $f$ )
1.705 – 30	30	0.08	20*lg(0.08 / $f$ )	30	20*lg(30 / $f$ )
30 – 88	3	---	--	100	40
88 – 216	3	--	--	150	43.5
126 – 960	3	--	--	200	46
above 960	3	--	--	500	54

Note 1:  $f$  in kHz

**Table 15 General radiated emission limits**

At frequencies at or above 30 MHz, measurements may be performed at distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempts should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

## 2.5.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11 and 11.12


Prescans are performed in six positions of the EUT to get the full spectrum of emission caused by the EUT with the measuring antenna raised and lowered from 1 m to 4 m with vertical and horizontal polarisation to find the combination of table position, antenna height and antenna polarisation for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB or exceeding the limit using subranges and limited number of maximums.

Further maximisation for adjusting the maximum position is following.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

### 2.5.6.1 Frequency range 9 kHz – 30 MHz

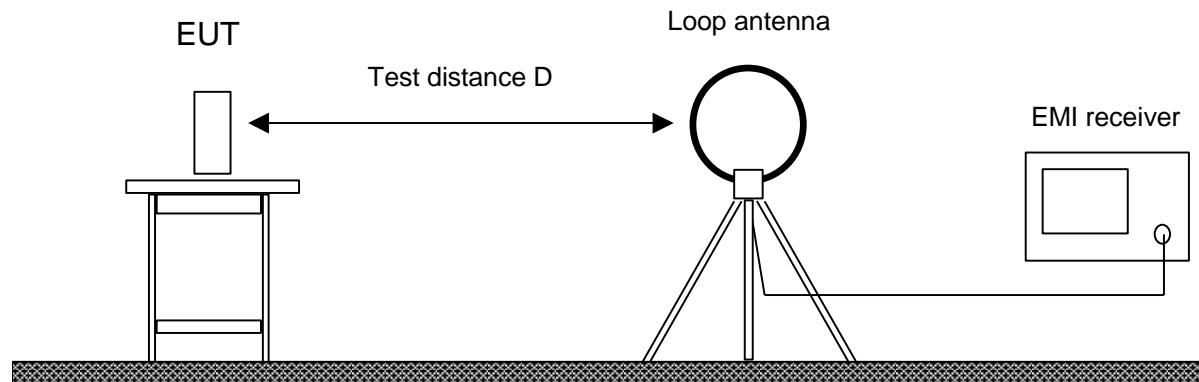


The EUT was placed on a non-conductive table, 0.8 m above the ground.

Radiated emissions in the frequency 9 kHz – 30 MHz is measured within a semi-anechoic room with an active loop antenna with the measurement detector set to peak. In addition in the frequency range 9 kHz to 490 kHz also an average detector was used. The measurement bandwidth of the receiver was set to 300 Hz in the frequency range 9 kHz to 150 kHz and 10 kHz in the frequency range 150 kHz to 30 MHz. Prescans were performed in six positions of the EUT.

For final measurements the detector was set to CISPR quasi-peak and in addition to CISPR average in the frequency range 9 kHz to 490 kHz with a resolution bandwidth 200 Hz in the frequency range 9 kHz to 150 kHz and 9 kHz in the frequency range 150 kHz to 30 MHz. Final tests were performed immediately after a final frequency and zoom (for drifting disturbances) and maximum adjustment.

### 2.5.6.2 Frequency range 30 MHz – 1 GHz

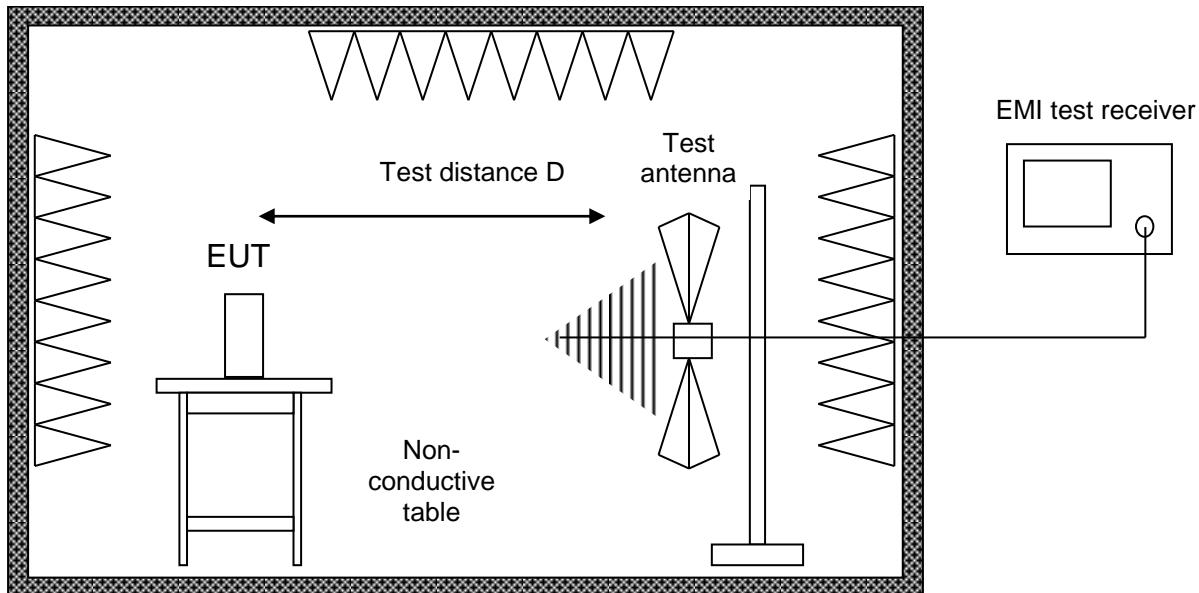


Alternate test site (semi anechoic room)

The EUT was placed on a non-conductive table, 0.8 m above the ground plane. Radiated emissions in the frequency range 30 MHz – 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4. for alternative test sites. A linear polarised logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used.

For prescan tests the test receiver is set to peak-detector with a bandwidth of 120 kHz. With the measurement bandwidth of the test receiver set to 120 kHz CISPR quasi-peak detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.

### 2.5.6.3 Frequency range above 1 GHz

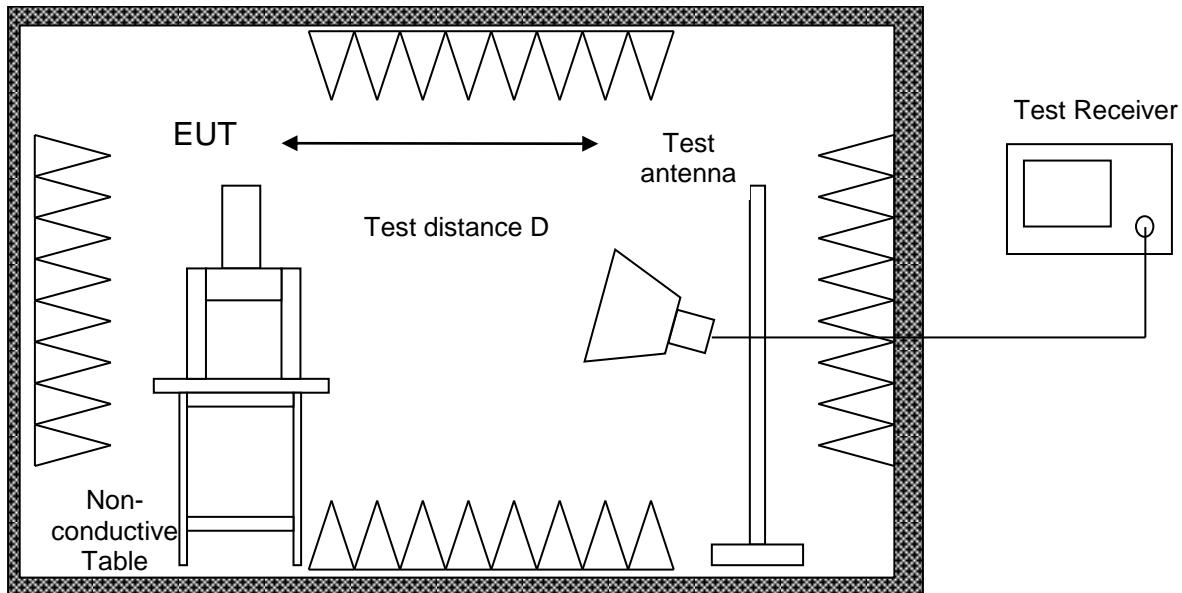

Fully anechoic room

The EUT was placed on a non-conductive table, 1.5 m above the ground plane. Radiated emission tests above 1 GHz are performed in a fully anechoic room with the  $S_{VSWR}$  requirements of ANSI C63.4. Measurements are performed both in the horizontal and vertical planes of polarisation using a test receiver with the detector function set to peak and average and the resolution bandwidth set to 1 MHz. Testing above 1 GHz is performed with horn antennas with the EUT in boresight of the antenna.

For prescan tests the test receiver is set to peak- and average-detector with a bandwidth of 1 MHz. With the measurement bandwidth of the test receiver set to 1 MHz and peak- and CISPR average-detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.



## 2.5.7 Test Results

<i>Frequency range</i>	<i>Limit applied</i>	<i>Test distance</i>
9 kHz – 30 MHz	15.209; RSS-Gen	3 m
30 MHz – 1 GHz	15.209; RSS-Gen	3 m
1 GHz – 13 GHz	15.209; RSS-Gen	1 m
13 GHz – 18 GHz	15.209; RSS-Gen	1 m
18 GHz – 25 GHz	15.209; RSS-Gen	3 m

Table 16

### Sample calculation:


$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable attenuation (dB)} + \text{Antenna Transducer (dB(1/m)))}$$

Additional correction of limit in the frequency range 9 – 490 kHz (300 m to 3 m): +80.0 dB

Additional correction of limit in the frequency range 490 kHz – 30 MHz (30 m to 3 m): +40.0 dB


Additional correction of limit in the frequency ranges above 1 GHz (3 m to 1 m): +9.54 dB

**Conducted Tx spurious emissions Mode 1:**

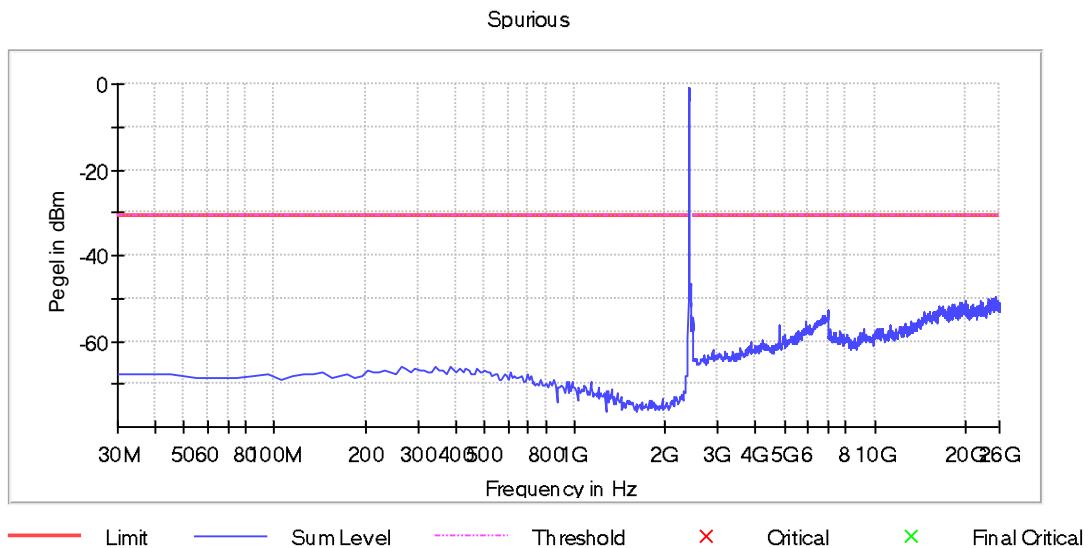


Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

**Conducted Tx spurious emissions Mode 2:**

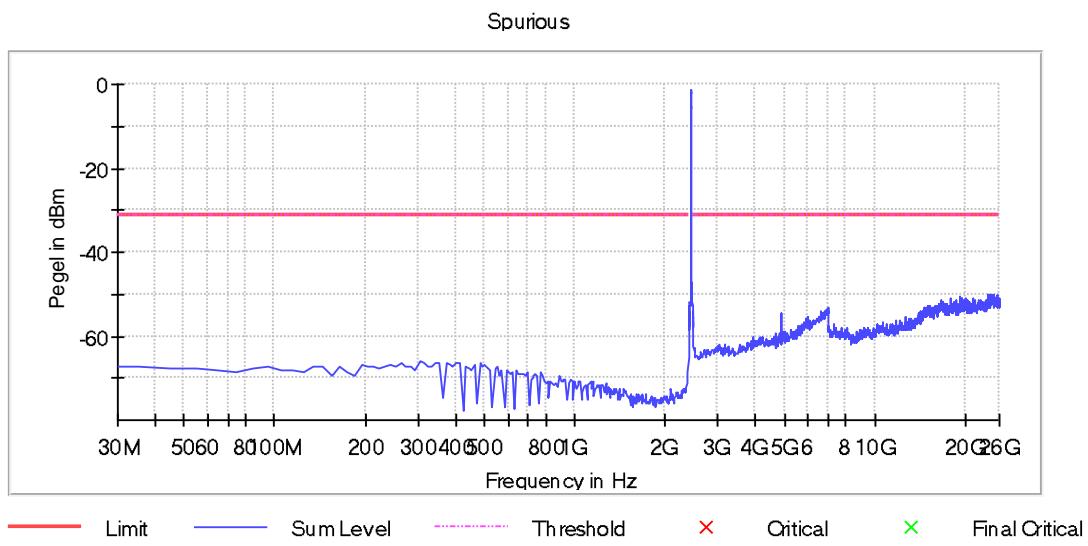


Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

### Conducted Tx spurious emissions Mode 3:

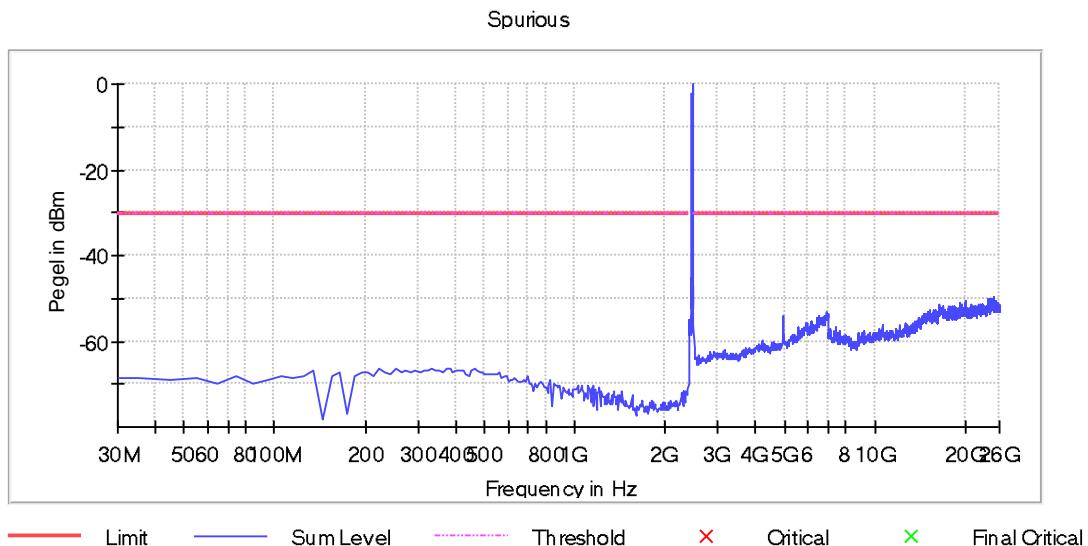


Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

### Conducted Tx spurious emissions Mode 4:

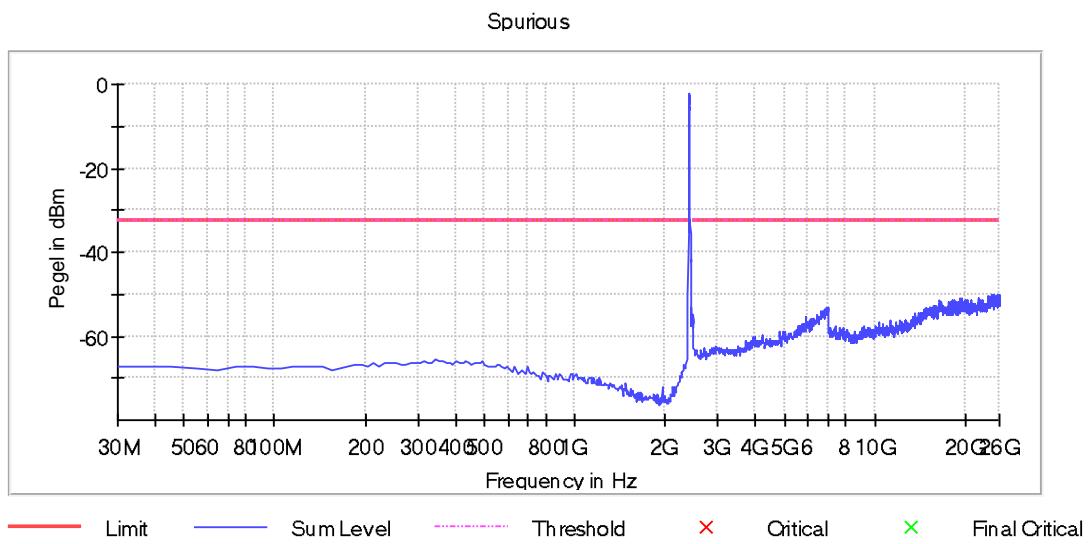


Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

### Conducted Tx spurious emissions Mode 5:

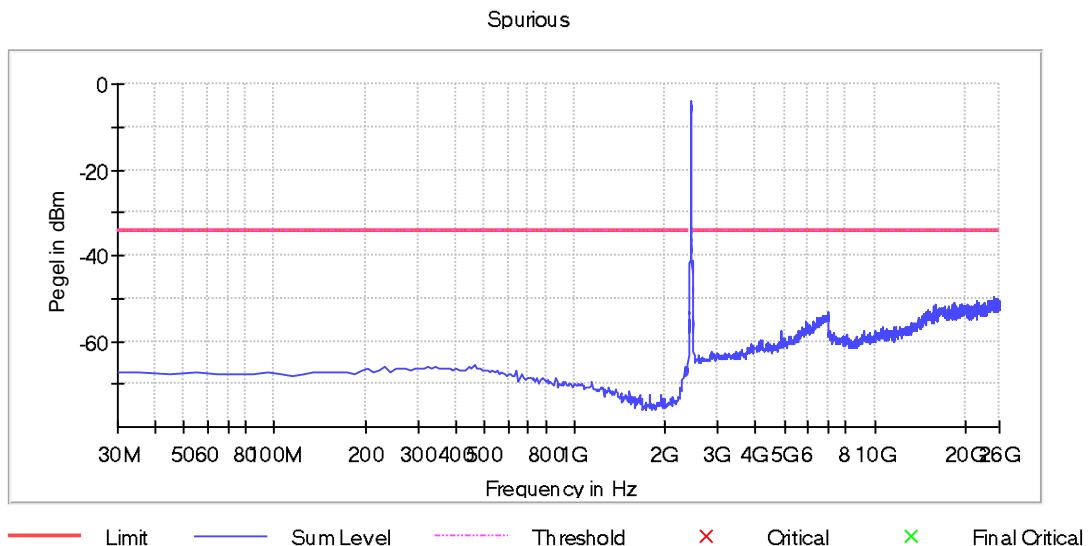


Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

### Conducted Tx spurious emissions Mode 6:

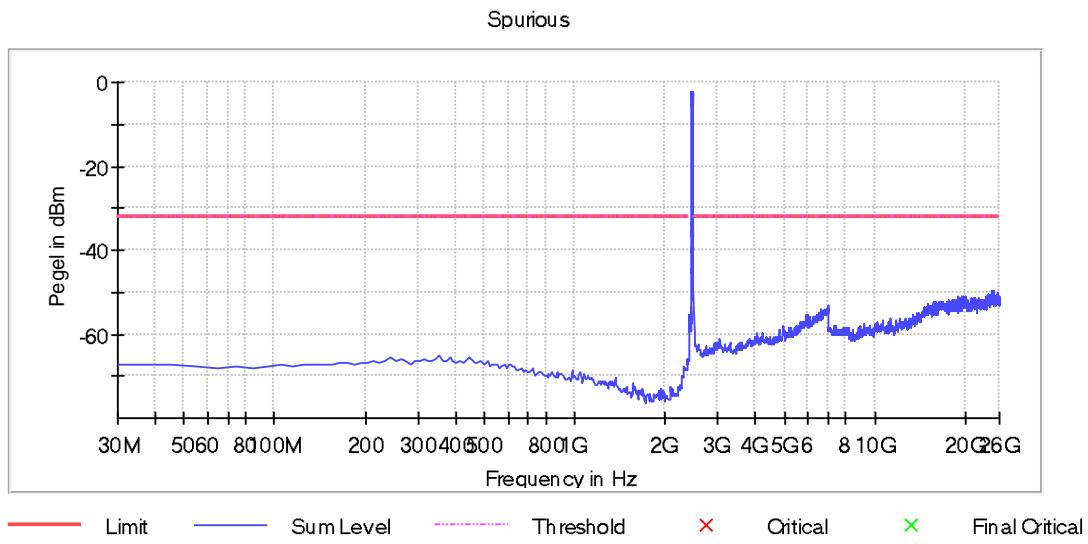


Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak


**Conducted Tx spurious emissions Mode 7:**

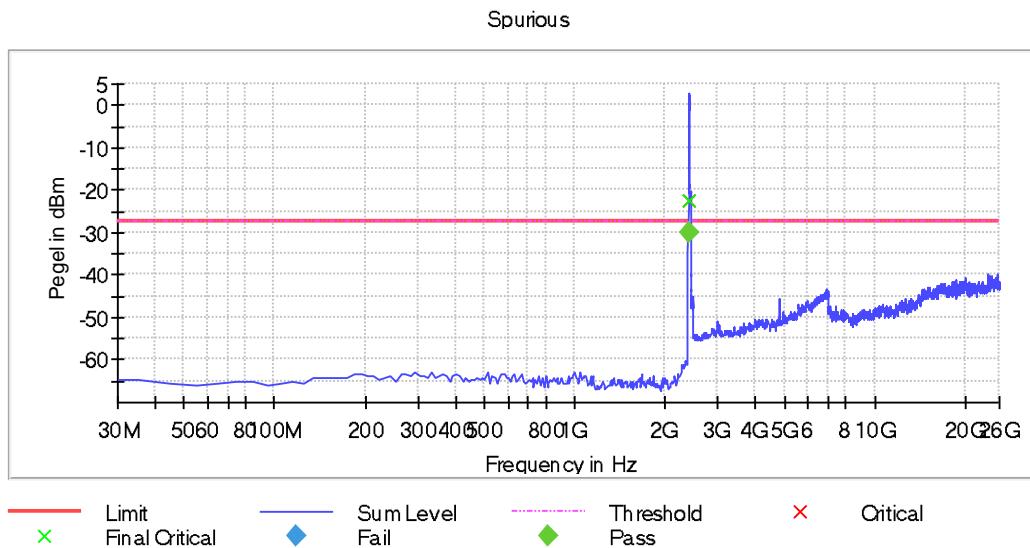

Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak

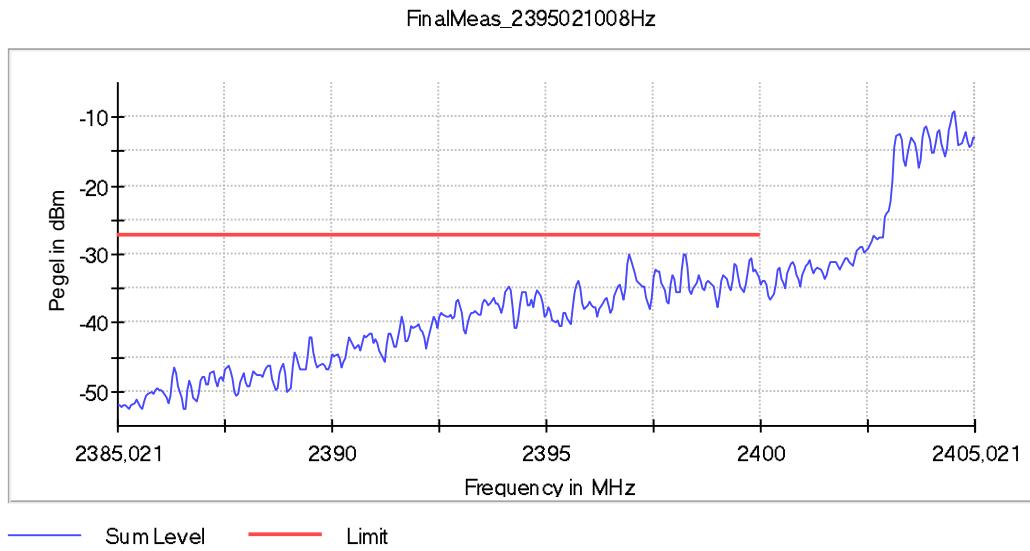


**Conducted Tx spurious emissions Mode 8:**

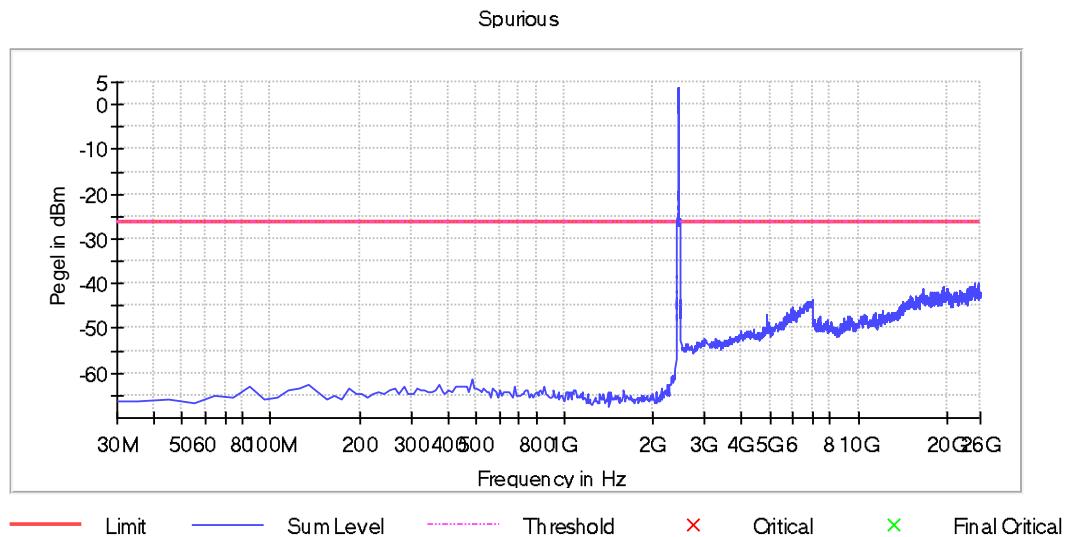

Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak


**Conducted Tx spurious emissions Mode 9:**

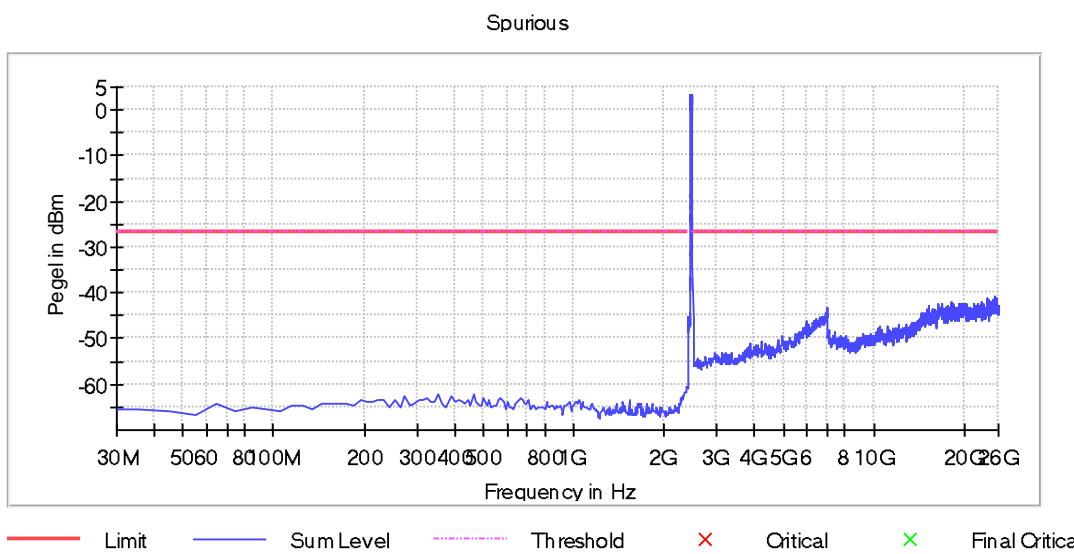


Instrument Settings	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
Detector	MaxPeak	MaxPeak



Premeasurements were performed for worst case evaluation. Final testing was performed in the chosen worst-case Mode, see section 2.2. Mode 5 was found to be the most critical configuration. Following radiated Tx spurious emissions were captured with Mode 5 active. The device was positioned along the following axis:

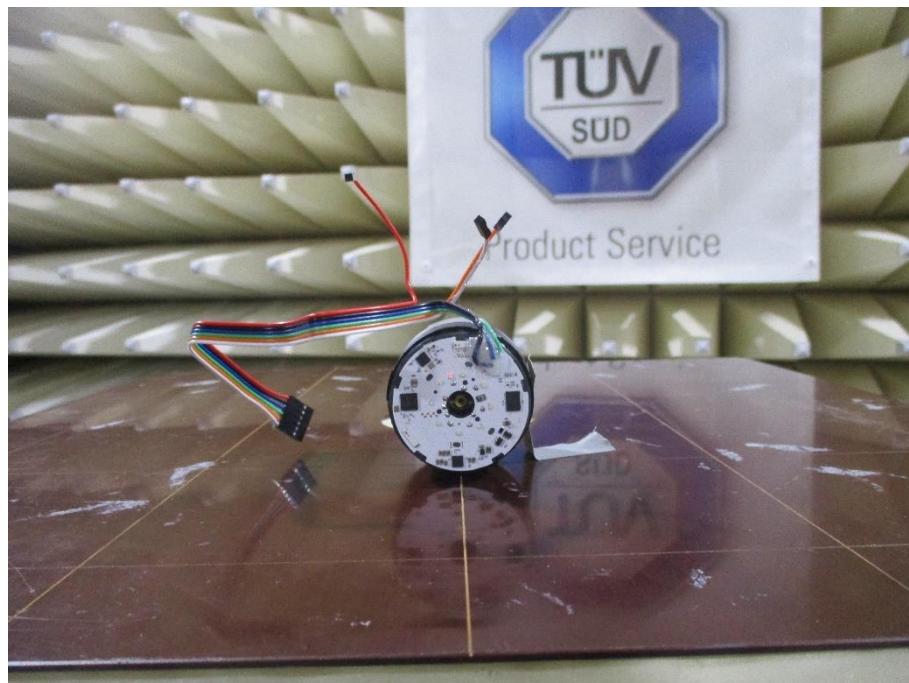


**Radiated Tx spurious emissions Mode 5:**

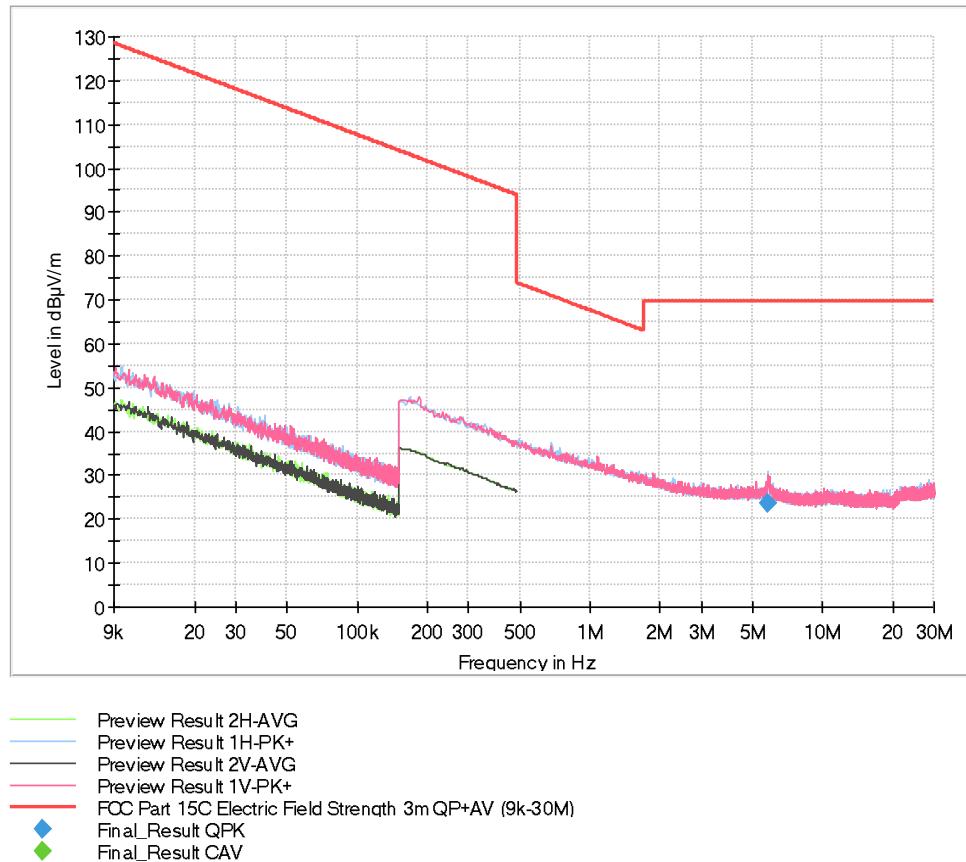


**Final Results:**

Frequency MHz	Qua- siPeak dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
5.811250	23.44	69.54	46.10	1000.0	9.000	100.0	H	139.0	19.4

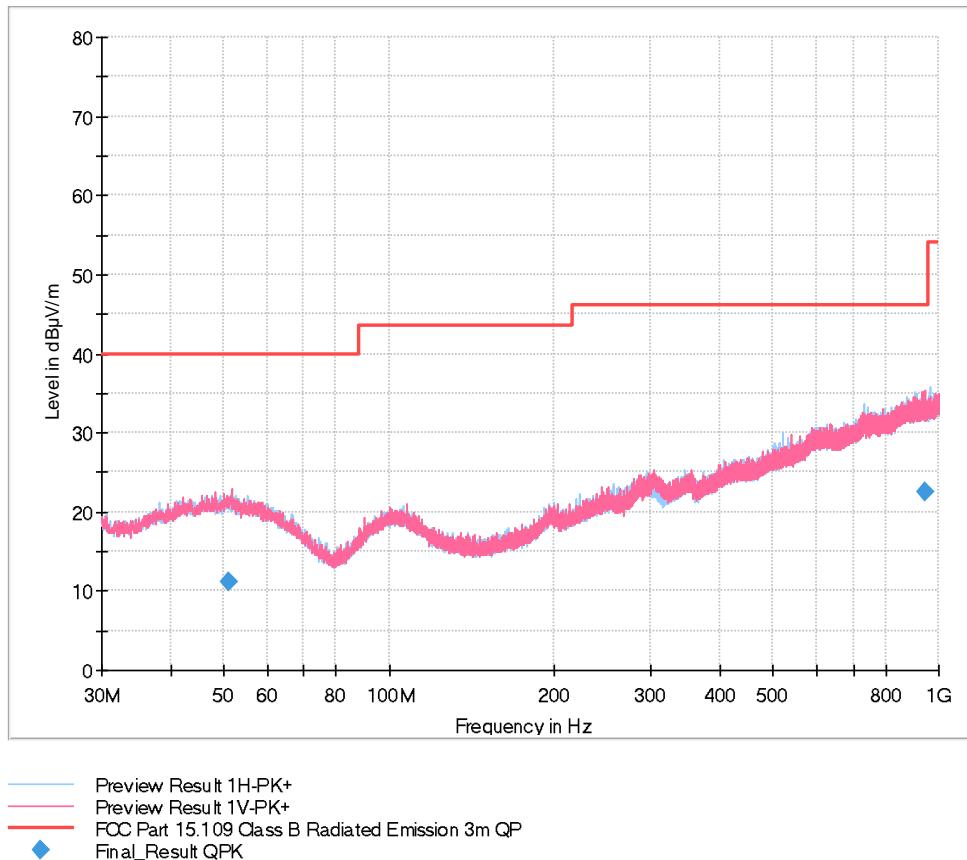

### Final Results:

Frequency MHz	QuasiPeak dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azimuth deg	Corr. dB/m
51.150000	11.18	40.00	28.82	1000.0	120.000	110.0	V	95.0	21.9
945.180000	22.42	46.02	23.60	1000.0	120.000	275.0	V	74.0	32.3

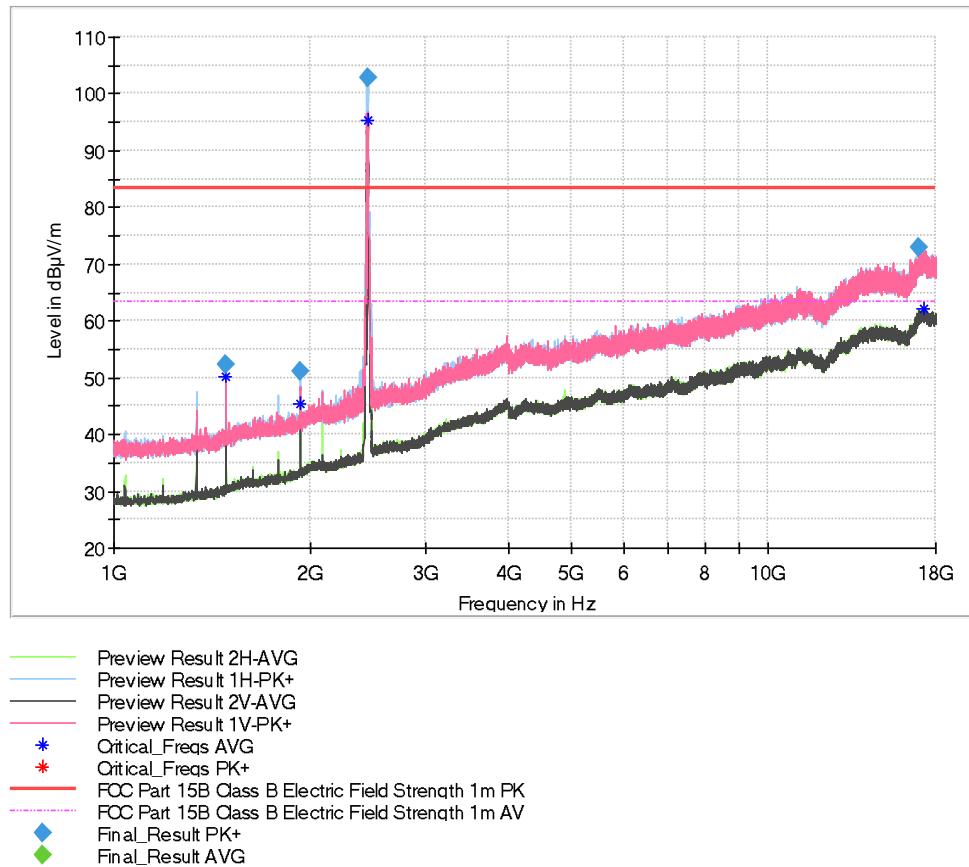


### Final Results:

Frequency MHz	MaxPeak at 1m dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
1485.000000	52.22	83.50	31.28	1000.0	1000.000	300.0	H	150.0	30.6
1930.000000	51.19	83.50	32.31	1000.0	1000.000	100.0	H	-150.0	33.1
2443.000000	102.71	*	*	1000.0	1000.000	100.0	H	30.0	35.0
17008.500000	72.87	83.50	10.63	1000.0	1000.000	100.0	H	-150.0	57.2

\*: Intentional radiation not evaluated.

### Restricted Bands:

Frequency MHz	MaxPeak at 3m dBµV/m	Limit dBµV/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azi- muth deg
1485.000000	42.68	74.00	31.32	1000.0	1000.000	300.0	H	150.0

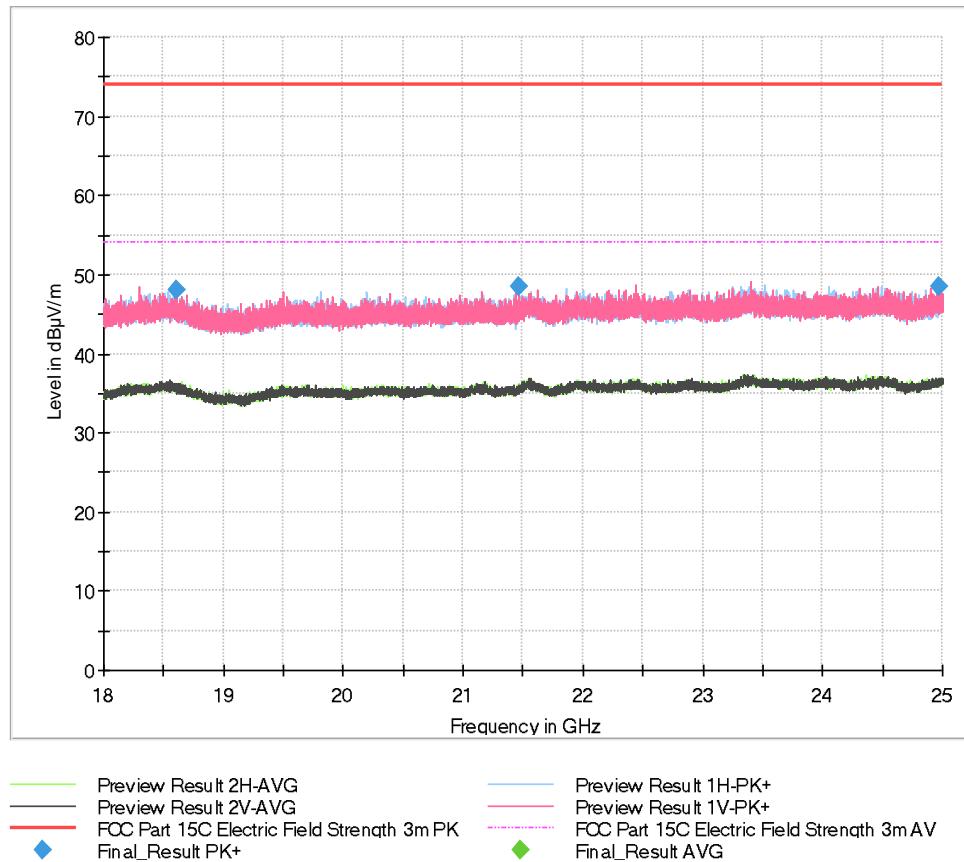

### Final Results:

Frequency MHz	MaxPeak dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB	Meas. Time ms	Bandwidth kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
18605.000000	48.12	73.98	25.86	1000.0	1000.000	200.0	V	90.0	11.6
21469.500000	48.52	73.98	25.46	1000.0	1000.000	100.0	V	-150.0	12.7
24967.000000	48.49	73.98	25.49	1000.0	1000.000	100.0	V	-150.0	14.5



## 2.5.8 Test Location and Test Equipment

The test was carried out in a non-shielded room and semi anechoic room no. 3:

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
Signal and Spectrum Analyser	Rohde & Schwarz	FSW43	53496	12	2025-04-30
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	19691	36	2027-04-30
Double ridged horn antenna	Rohde & Schwarz	HF907	40089	24	2024-10-31
Horn Antenna with preamplifier	Rohde & Schwarz	A-INFOMW LB-180400H-KF + TS-LNA 1840	43661	24	2025-01-17
Loop antenna	Schwarzbeck	FMZB 1519 B	44334	36	2026-06-30
EMI test receiver	Rohde & Schwarz	ESR7	61814	12	2025-06-30
Semi anechoic room	Frankonia	Cabin no. 3	56331	35	2025-07-07
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 17



## 2.6 Temperature Stability

### 2.6.1 Specification Reference

ISED RSS-Gen, Clause 6.11, 8.11

### 2.6.2 Equipment under Test and Modification State

Smart Lock Ultra Article type: 012.518; S/N ---; Modification state 0

### 2.6.3 Date of Test

2024-09-04 to 2024-09-05

### 2.6.4 Environmental Conditions


Ambient Temperature	25 °C
Relative Humidity	54 %

### 2.6.5 Specification Limits

If the stability of the license-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80 % of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 85 MHz – 72 MHz, 76 MHz – 88 MHz, 174 MHz – 216 MHz, and 470 MHz – 602 MHz, unless otherwise indicated.

## 2.6.6 Test Method

The test was performed according to ANSI C63.10, section 6.8.

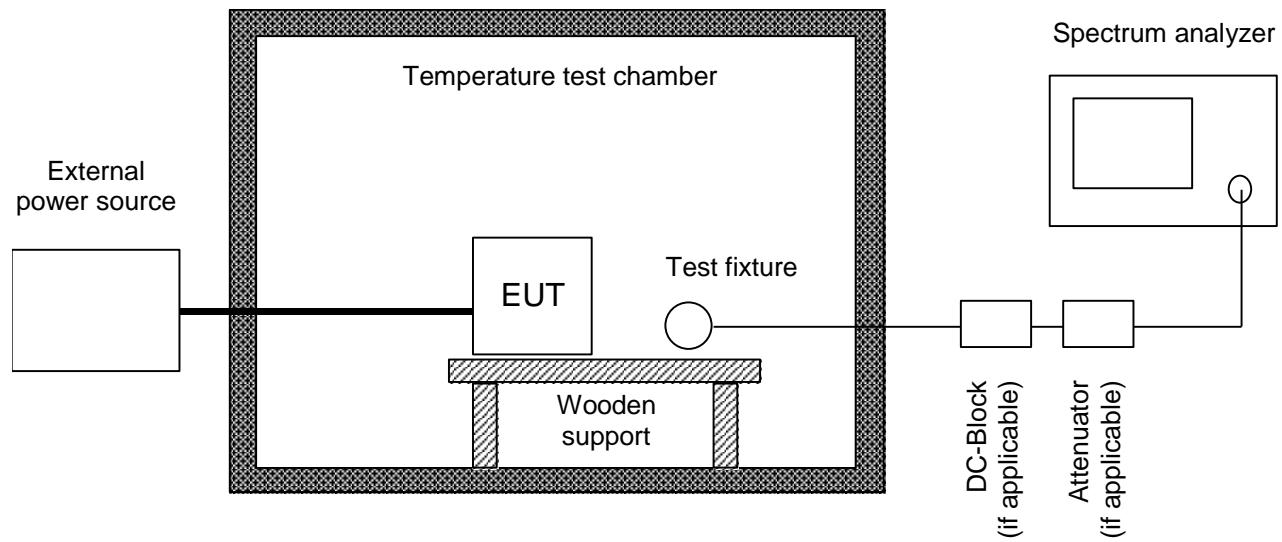

The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C. Temperature and voltage range may vary if the manufacturer states another temperature or voltage range.

If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as a DC block and appropriate (50 Ω) attenuators. In case where the EUT does not provide an antenna connector, or a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- The maximum battery voltage as delivered by a new battery or 115 % of the battery nominal voltage
- The battery nominal voltage
- 85 % of the battery nominal voltage
- The battery operating end point voltage which shall be specified by the equipment manufacturer.

The EUT is operating providing an unmodulated carrier for frequency error tests. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point of the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1 % of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance is larger than the uncertainty of the measured frequency tolerance.



## 2.6.7 Test Results

Temperature	Mode	Channel	Supply Voltage	Band Edge Left (MHz)	Band Edge Right (MHz)	Center Frequency (MHz)	Frequency drift (%)
20 °C	1	1	14.8 V	2405.750000	2418.250000	2412.000000	0
20 °C	2	7	14.8 V	2435.750000	2448.250000	2442.000000	0
20 °C	3	11	14.8 V	2455.750000	2468.250000	2462.000000	0
20 °C	4	1	14.8 V	2403.750000	2420.250000	2412.000000	0
20 °C	5	7	14.8 V	2433.850000	2450.250000	2442.050000	0
20 °C	6	11	14.8 V	2453.850000	2470.250000	2462.050000	0
20 °C	7	1	14.8 V	2401.950000	2422.150000	2412.050000	0
20 °C	8	7	14.8 V	2431.450000	2452.050000	2441.750000	0
20 °C	9	11	14.8 V	2451.950000	2471.950000	2461.950000	0
10 °C	1	1	14.8 V	2405.750000	2418.250000	2412.000000	0
10 °C	2	7	14.8 V	2435.650000	2448.250000	2441.950000	-0.02047502048
10 °C	3	11	14.8 V	2455.750000	2468.250000	2462.000000	0
10 °C	4	1	14.8 V	2403.850000	2420.150000	2412.000000	0
10 °C	5	7	14.8 V	2433.850000	2450.250000	2442.050000	0
10 °C	6	11	14.8 V	2453.750000	2470.250000	2462.000000	-0.02030827969
10 °C	7	1	14.8 V	2403.250000	2420.750000	2412.000000	-0.02072925520
10 °C	8	7	14.8 V	2433.250000	2450.750000	2442.000000	0.1023855841
10 °C	9	11	14.8 V	2453.250000	2470.750000	2462.000000	0.02030910457
40 °C	1	1	14.8 V	2405.750000	2418.150000	2411.950000	-0.02072968491
40 °C	2	7	14.8 V	2435.650000	2448.150000	2441.900000	-0.02047543971
40 °C	3	11	14.8 V	2455.750000	2468.150000	2461.950000	-0.02030869212
40 °C	4	1	14.8 V	2403.850000	2420.150000	2412.000000	0
40 °C	5	7	14.8 V	2433.750000	2450.150000	2441.950000	-0.04094920251
40 °C	6	11	14.8 V	2453.750000	2470.150000	2461.950000	-0.02030869212
40 °C	7	1	14.8 V	2403.250000	2420.750000	2412.000000	0
40 °C	8	7	14.8 V	2433.250000	2450.750000	2442.000000	0
40 °C	9	11	14.8 V	2453.250000	2470.750000	2462.000000	0

Table 18



## 2.6.8 Test Location and Test Equipment

The test was carried out in a non-shielded room:

<i>Instrument</i>	<i>Manufacturer</i>	<i>Type No</i>	<i>TE No</i>	<i>Calibra-tion Pe-riod (months)</i>	<i>Calibration Due</i>
Climatic test chamber	ESPEC	PL-4 J	38958	18	2025-01-31
Switching device	Rohde & Schwarz	OSP120	20248	36	2026-07-31
Switching device	Rohde & Schwarz	OSP120	38807	36	2026-08-31
Signal and Spectrum Analysator	Rohde & Schwarz	FSV40	20219	24	2026-03-31
EMC measurement software	Rohde & Schwarz	EMC32 TS8997 – V10.60.00	44381	---	---

Table 19

### 3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Conducted Voltage Emission		
9 kHz to 150 kHz (50Ω/50µH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50µH AMN)	2	± 3.4 dB
100 kHz to 200 MHz (50Ω/5µH AMN)	2	± 3.6 dB
Discontinuous Conducted Emission		
9 kHz to 150 kHz (50Ω/50µH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50µH AMN)	2	± 3.4 dB
Conducted Current Emission		
9 kHz to 200 MHz	2	± 3.5 dB
Magnetic Fieldstrength		
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB
Radiated Emission		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 5.0 dB
1 GHz to 6 GHz	2	± 4.6 dB
Test distance 10 m		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 4.9 dB
The expanded uncertainty reported according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 is based on a standard uncertainty multiplied by a coverage factor of kp = 2, providing a level of confidence of p = 95.45%		

Table 20 Measurement uncertainty based on CISPR 16-4-2



<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	2	± 5 %
Conducted Power		
9 kHz ≤ f < 30 MHz	2	± 1.0 dB
30 MHz ≤ f < 1 GHz	2	± 1.5 dB
1 GHz ≤ f ≤ 40 GHz	2	± 2.5 dB
1 MS/s power sensor (TS8997)	2	± 1.5 dB
Occupied Bandwidth	2	± 5 %
Power Spectral Density	2	± 3.0 dB
Radiated Power		
25 MHz – 6 GHz	1.96	±4.4 dB
1 GHz – 18 GHz	1.96	±4.7 dB
18 GHz – 40 GHz	1.96	±4.9 dB
40 GHz – 325 GHz	1.96	±6.1 dB
Conducted Spurious Emissions	2	± 3.0 dB
Radiated Spurious Emissions	2	± 6.0 dB
Voltage		
DC	2	± 1.0 %
AC	2	± 2.0 %
Time (automatic)	2	± 5 %
Frequency	2	± 10 <sup>-7</sup>

The expanded uncertainty reported according to ETSI TR 100 028:2001 is based on a standard uncertainty multiplied by a coverage factor of  $kp = 2$ , providing a level of confidence of  $p = 95.45\%$

Table 21 Measurement uncertainty based on ETSI TR 100 028

The measurement uncertainty in the laboratory is less than or equal to the maximum measurement uncertainty according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 ( $U_{CISPR}$ ) and as specified in the test report below. This normative regulation means that the measured value is also the value to be assessed in relation to the limit value.



<i>Test Name</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	±5 %
Conducted Power	
9 kHz ≤ f < 30 MHz	±1.0 dB
30 MHz ≤ f < 1 GHz	±1.5 dB
1 GHz ≤ f ≤ 40 GHz	±2.5 dB
1 MS/s power sensor (2.4 / 5 GHz band)	±1.5 dB
Power Spectral Density	±3.0 dB
Radiated Power	
25 MHz – 26.5 GHz	±6.0 dB
26.5 GHz – 66 GHz	±8.0 dB
40 GHz – 325 GHz	±10.0 dB
Conducted Spurious Emissions	±3.0 dB
Radiated Field Strength 9 kHz – 40 GHz	±6.0 dB
Voltage	
DC	± 1.0 %
AC	± 2.0 %
Time (automatic)	± 5 %
Frequency	± 10 <sup>-7</sup>

**Table 22 Decision Rule: Maximum allowed measurement uncertainty**