


EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2437 MHz	Test Voltage	AC 120V/60Hz

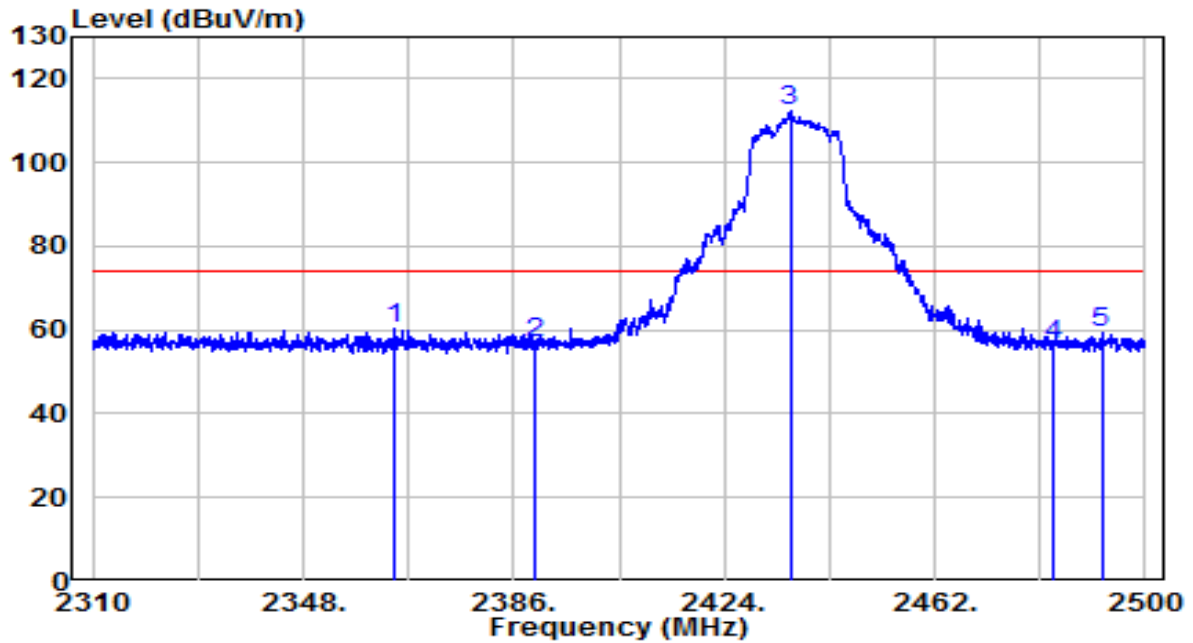


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2364.340	28.19	32.11	60.30	-13.70	74.00	Peak
2	2390.000	24.78	32.22	57.00	-17.00	74.00	Peak
3	* 2435.875	79.83	32.41	112.24	N/A	N/A	Peak
4	2483.500	23.75	32.61	56.36	-17.64	74.00	Peak
5	2492.115	26.60	32.65	59.25	-14.75	74.00	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2437 MHz	Test Voltage	AC 120V/60Hz

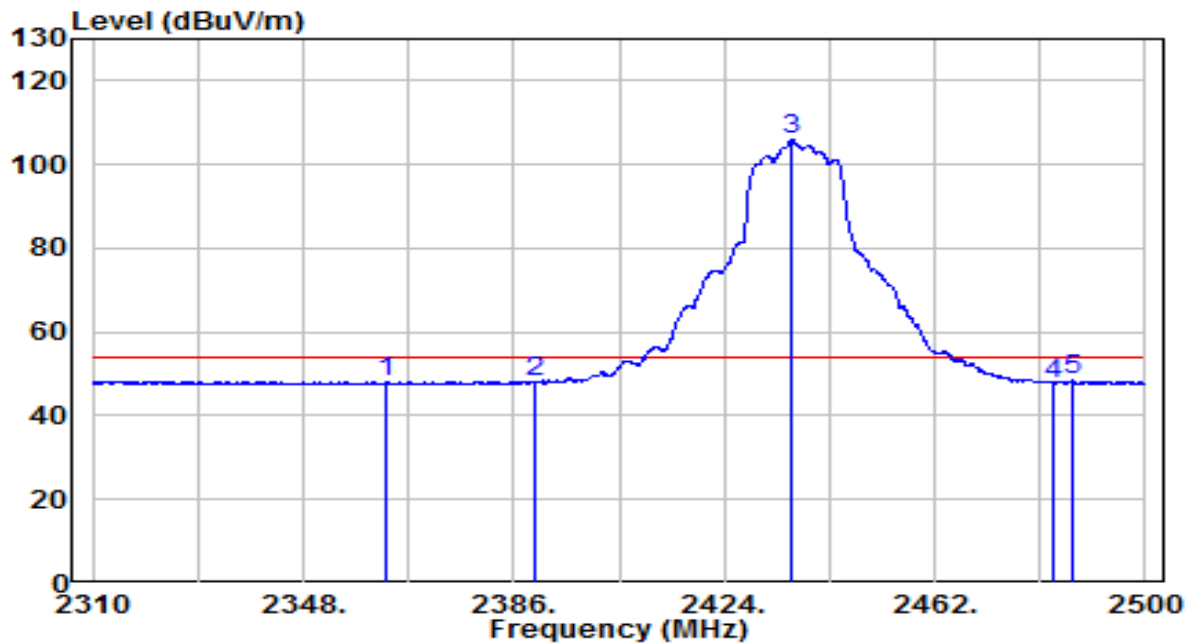


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2362.915	16.18	32.10	48.29	-5.71	54.00	Average
2	2390.000	15.64	32.22	47.86	-6.14	54.00	Average
3	* 2436.160	73.54	32.41	105.95	N/A	N/A	Average
4	2483.500	15.17	32.61	47.78	-6.22	54.00	Average
5	2486.890	15.70	32.62	48.33	-5.67	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2437 MHz	Test Voltage	AC 120V/60Hz

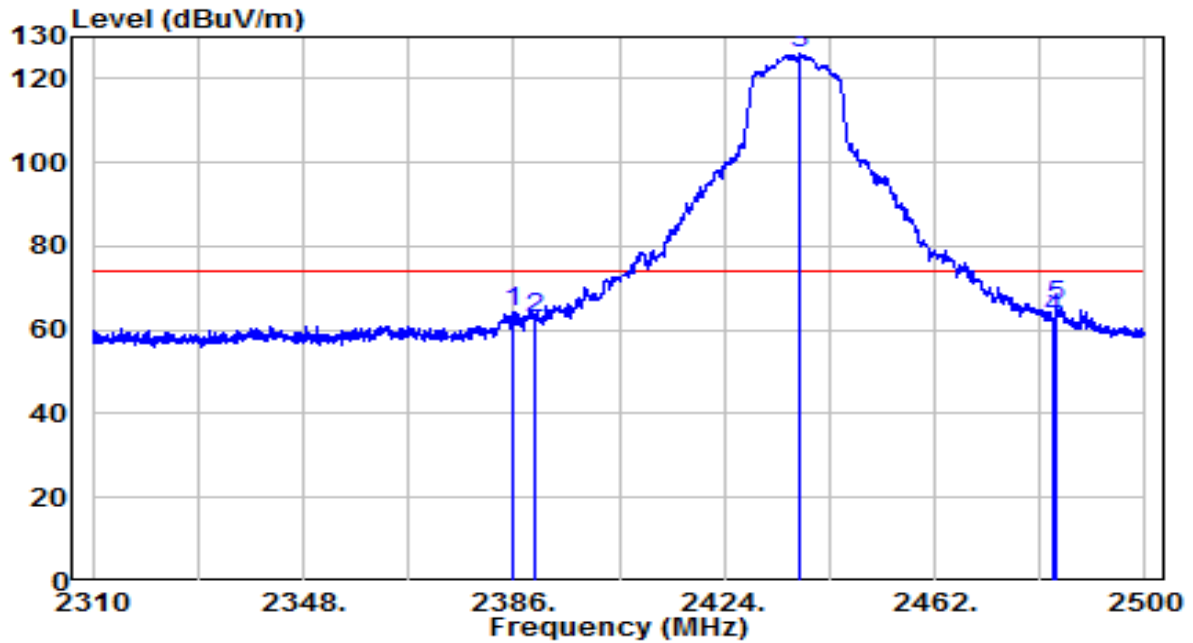


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2385.620	32.16	32.20	64.36	-9.64	74.00	Peak
2	2390.000	30.41	32.22	62.62	-11.38	74.00	Peak
3	* 2437.585	93.71	32.42	126.13	N/A	N/A	Peak
4	2483.500	30.01	32.61	62.62	-11.38	74.00	Peak
5	2484.135	32.89	32.61	65.50	-8.50	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2437 MHz	Test Voltage	AC 120V/60Hz

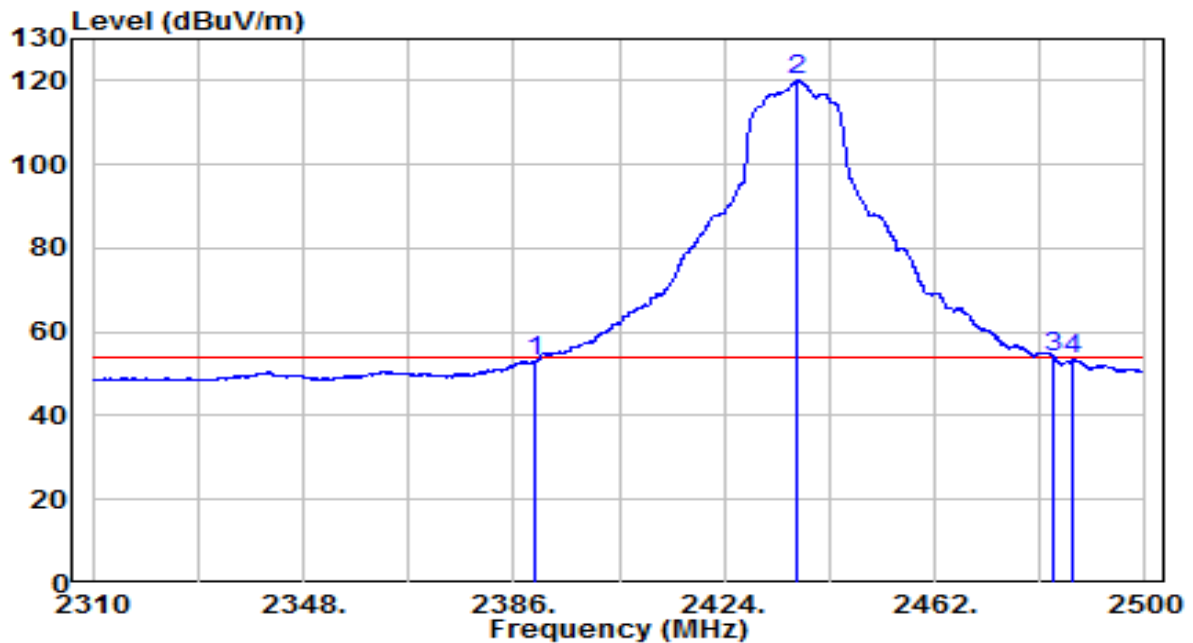


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	20.89	32.22	53.11	-0.89	54.00	Average
2 *	2437.205	87.68	32.42	120.10	N/A	N/A	Average
3	2483.500	21.26	32.61	53.87	-0.13	54.00	Average
4	2487.080	20.93	32.63	53.55	-0.45	54.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462 MHz	Test Voltage	AC 120V/60Hz

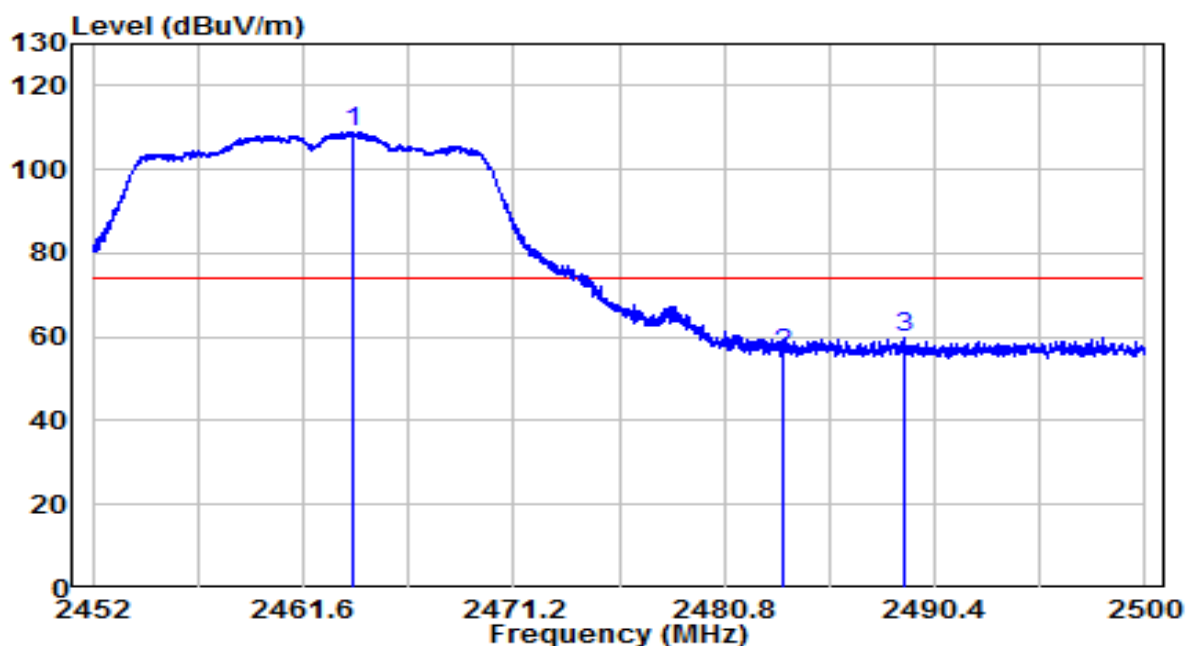


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2463.832	76.38	32.53	108.91	N/A	N/A	Peak
2		2483.500	23.49	32.61	56.10	-17.90	74.00	Peak
3		2488.984	26.98	32.63	59.62	-14.38	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462 MHz	Test Voltage	AC 120V/60Hz

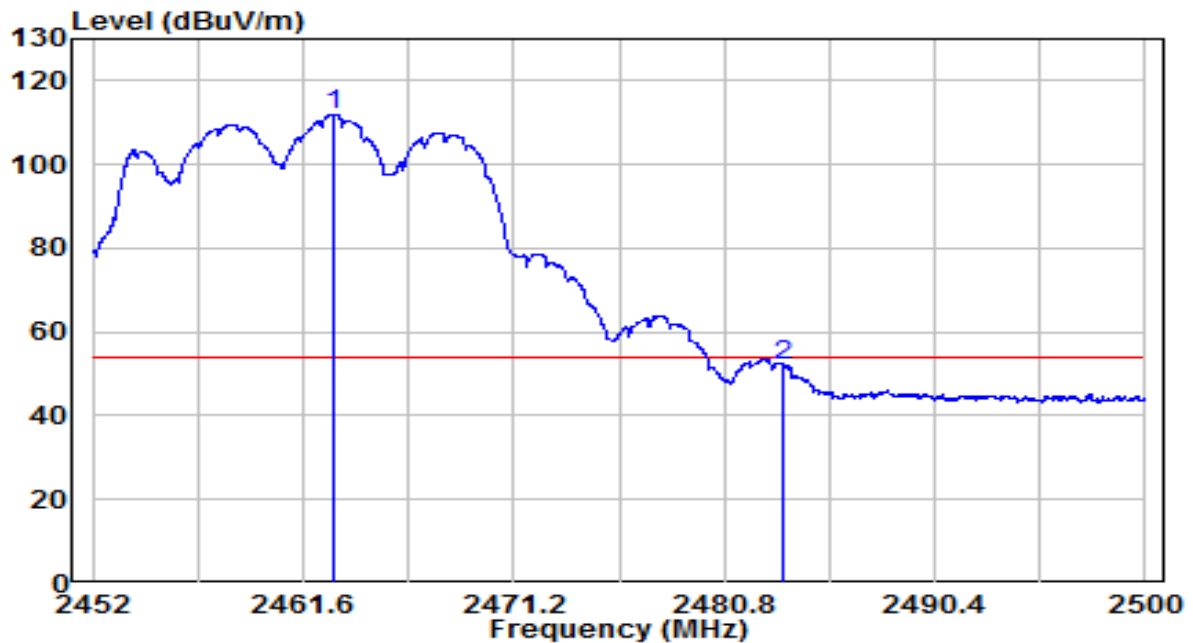


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.968	79.51	32.52	112.04	N/A	N/A	Average
2		2483.500	19.48	32.61	52.10	-1.90	54.00	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462 MHz	Test Voltage	AC 120V/60Hz

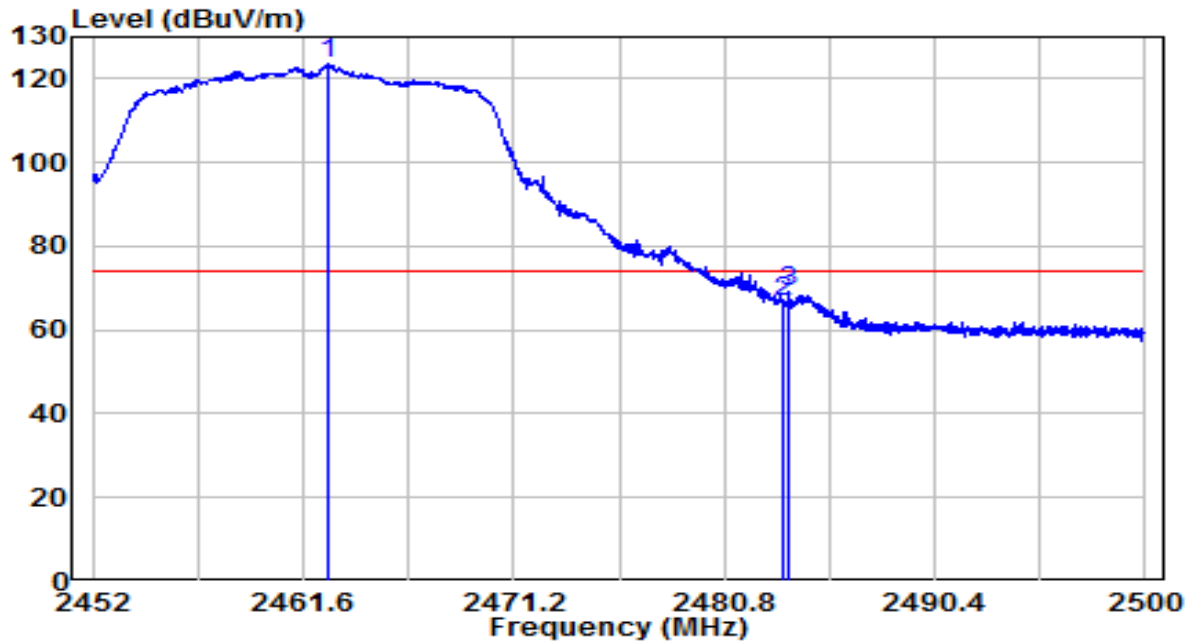


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.704	91.33	32.52	123.85	N/A	N/A	Peak
2		2483.488	34.04	32.61	66.66	-7.34	74.00	Peak
3		2483.752	36.45	32.61	69.06	-4.94	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11g at Channel 2462 MHz	Test Voltage	AC 120V/60Hz

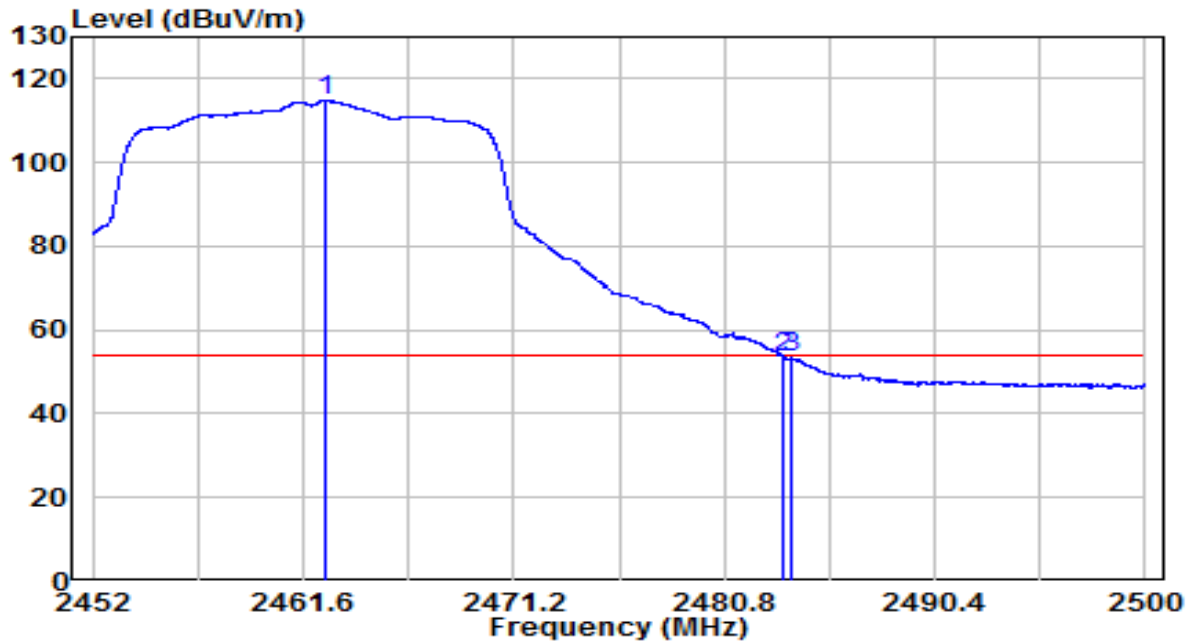


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.560	82.31	32.52	114.84	N/A	N/A	Average
2		2483.500	20.94	32.61	53.55	-0.45	54.00	Average
3		2483.848	20.61	32.61	53.23	-0.77	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2412MHz	Test Voltage	AC 120V/60Hz

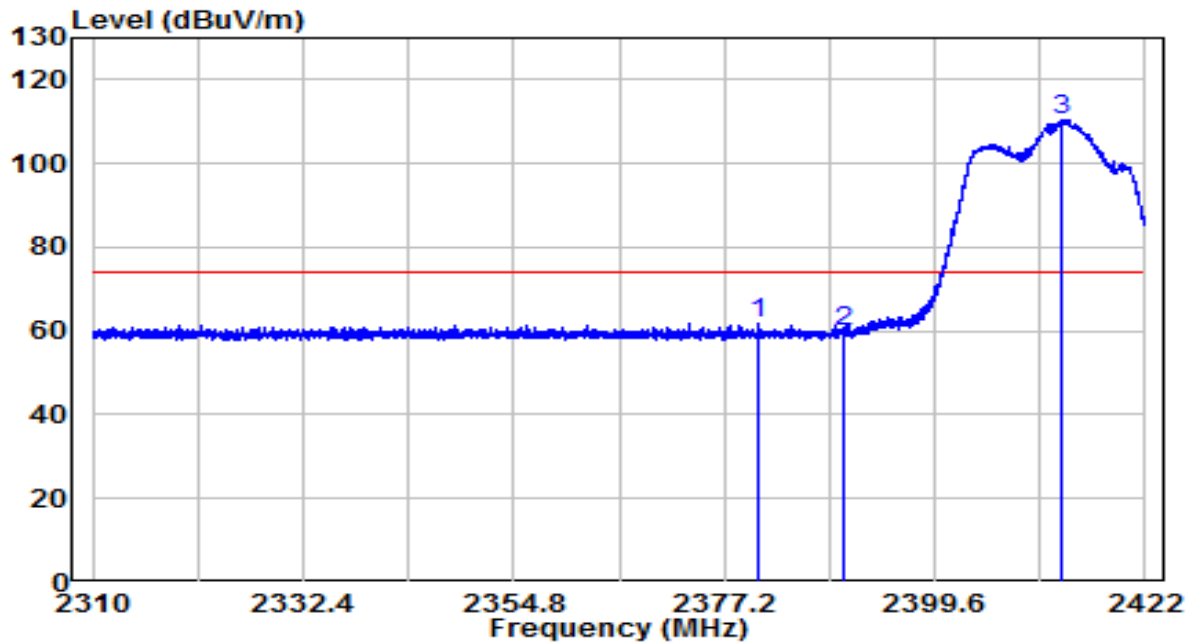


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2380.813	29.91	31.91	61.82	-12.18	74.00	Peak
2		2390.000	27.78	31.95	59.73	-14.27	74.00	Peak
3		2413.125	78.44	32.04	110.47	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2412MHz	Test Voltage	AC 120V/60Hz

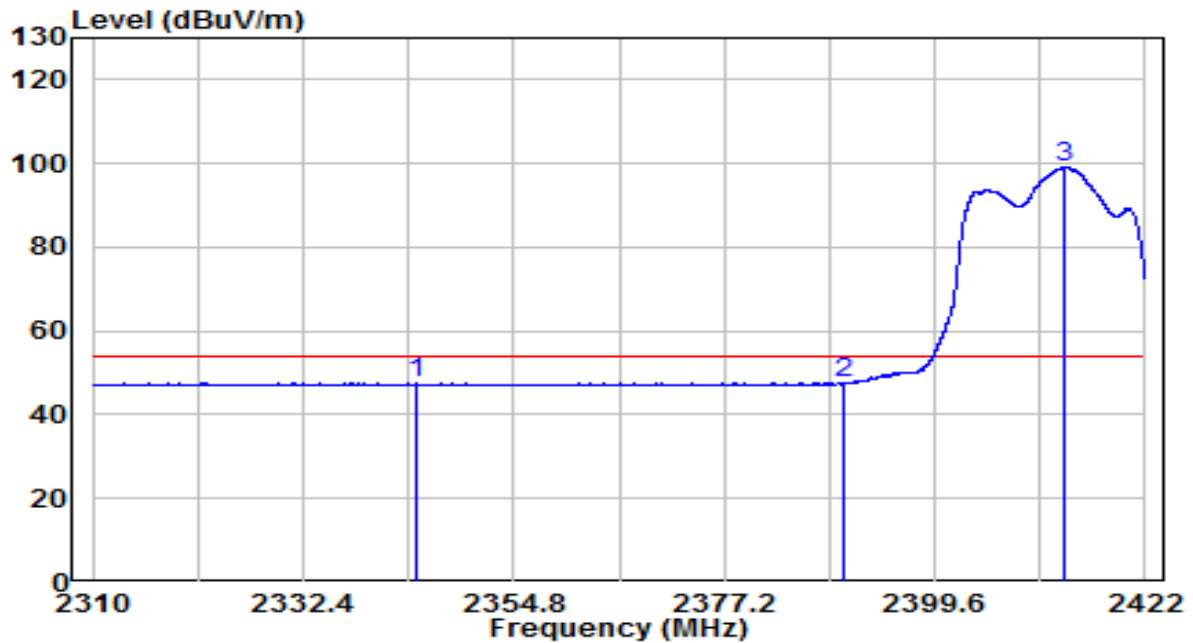


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2344.563	15.75	31.78	47.53	-6.47	54.00	Average
2	* 2390.000	15.62	31.95	47.57	-6.43	54.00	Average
3	2413.344	67.11	32.04	99.14	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2412MHz	Test Voltage	AC 120V/60Hz

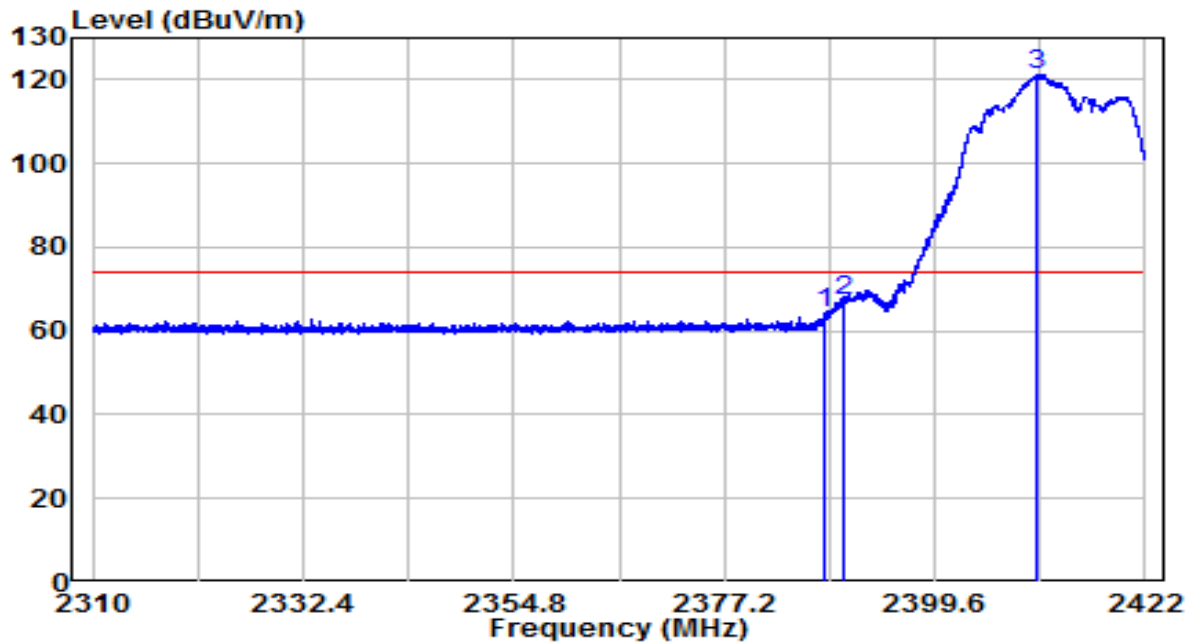


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2387.906	32.39	31.94	64.33	-9.67	74.00	Peak
2	* 2390.000	35.49	31.95	67.44	-6.56	74.00	Peak
3	2410.531	89.31	32.03	121.34	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2412MHz	Test Voltage	AC 120V/60Hz

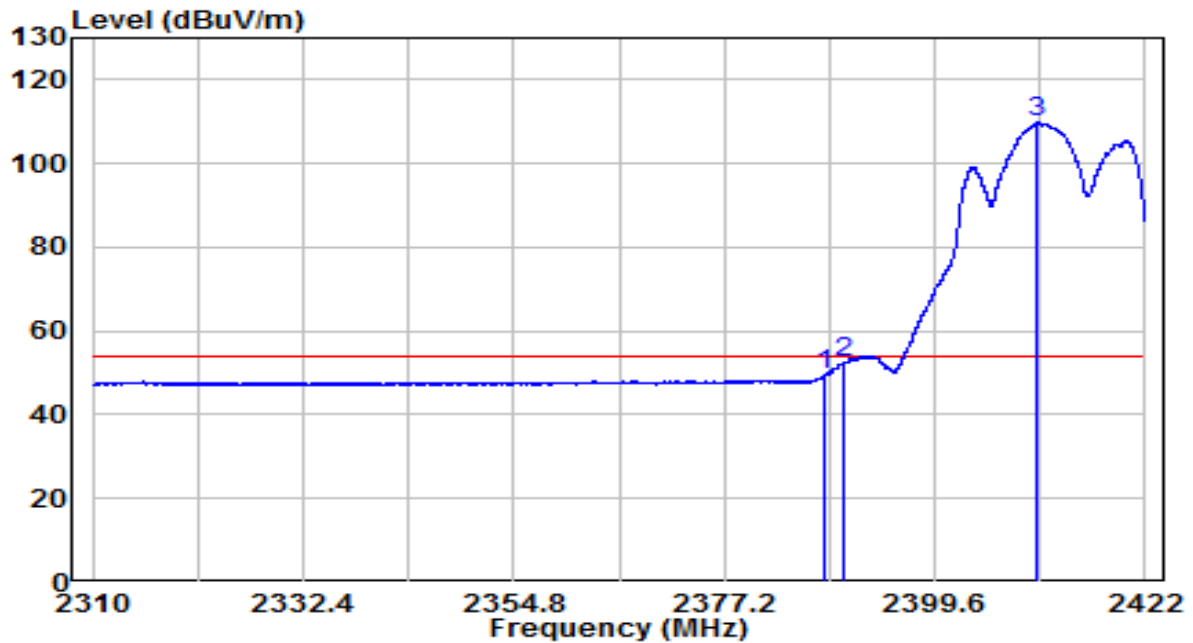


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2387.969	17.58	31.94	49.52	-4.48	54.00	Average
2	* 2390.000	20.33	31.95	52.28	-1.72	54.00	Average
3	2410.594	77.64	32.03	109.67	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2437MHz	Test Voltage	AC 120V/60Hz

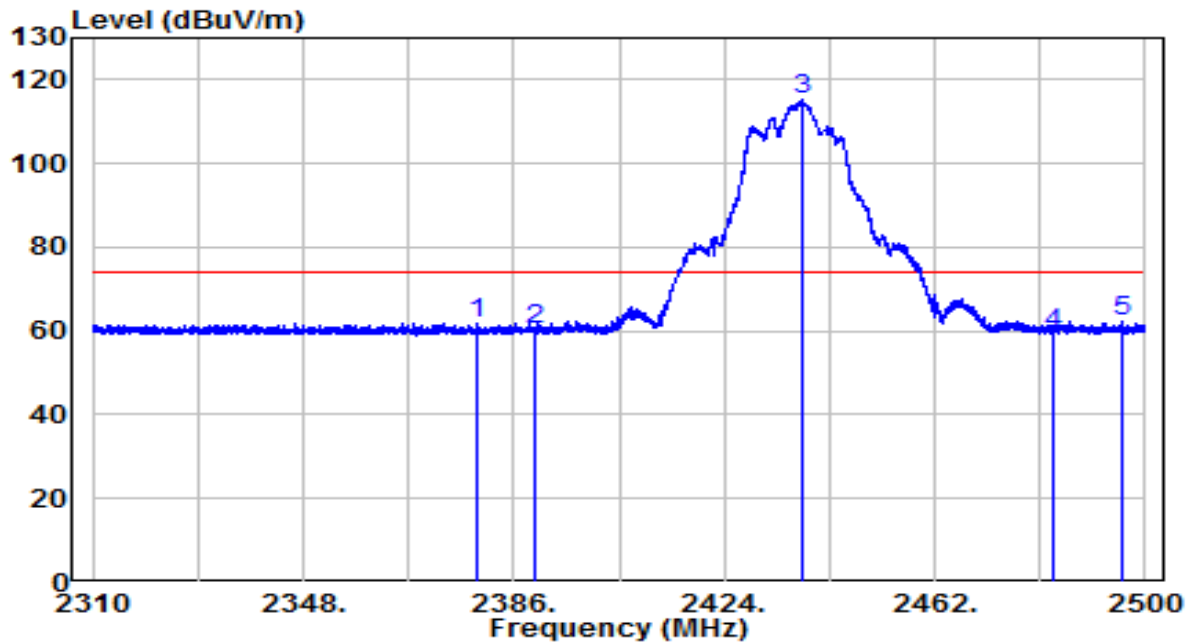


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2379.208	30.06	31.91	61.97	-12.03	74.00	Peak
2	2390.000	28.33	31.95	60.27	-13.73	74.00	Peak
3	2438.012	83.20	32.13	115.32	N/A	N/A	Peak
4	2483.500	27.11	32.30	59.41	-14.59	74.00	Peak
5	* 2495.962	30.05	32.34	62.40	-11.60	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C / 70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2437MHz	Test Voltage	AC 120V/60Hz

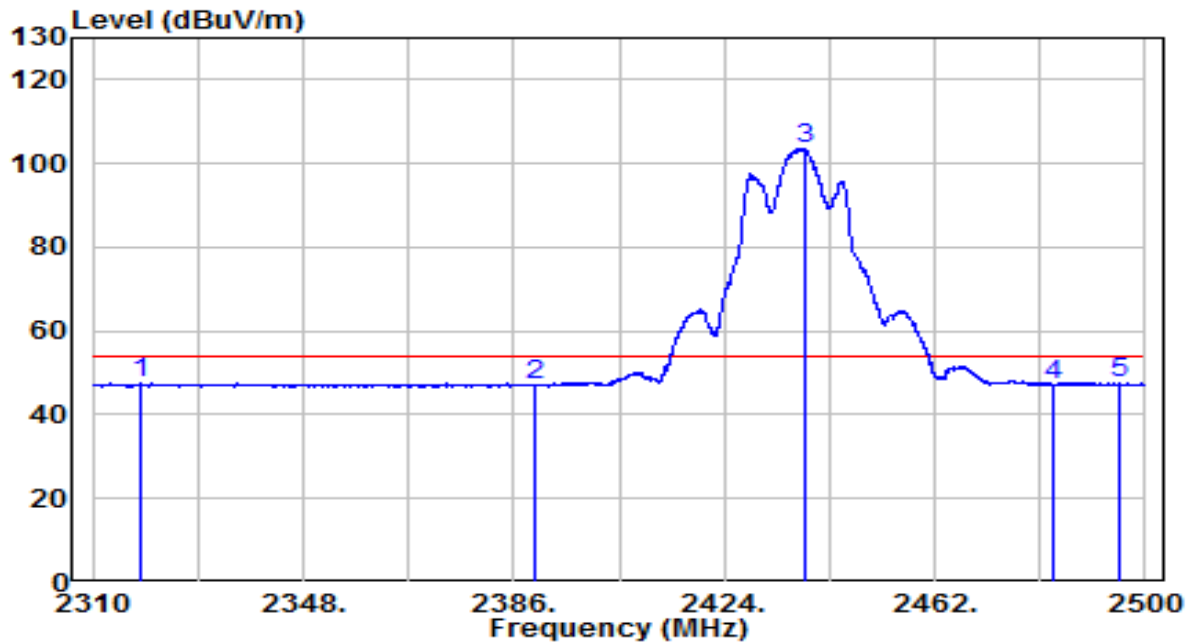


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2318.597	15.78	31.68	47.46	-6.54	54.00	Average
2	2390.000	15.14	31.95	47.09	-6.91	54.00	Average
3	2438.393	71.43	32.13	103.56	N/A	N/A	Average
4	2483.500	14.99	32.30	47.29	-6.71	54.00	Average
5	* 2495.440	15.21	32.34	47.56	-6.44	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2437MHz	Test Voltage	AC 120V/60Hz

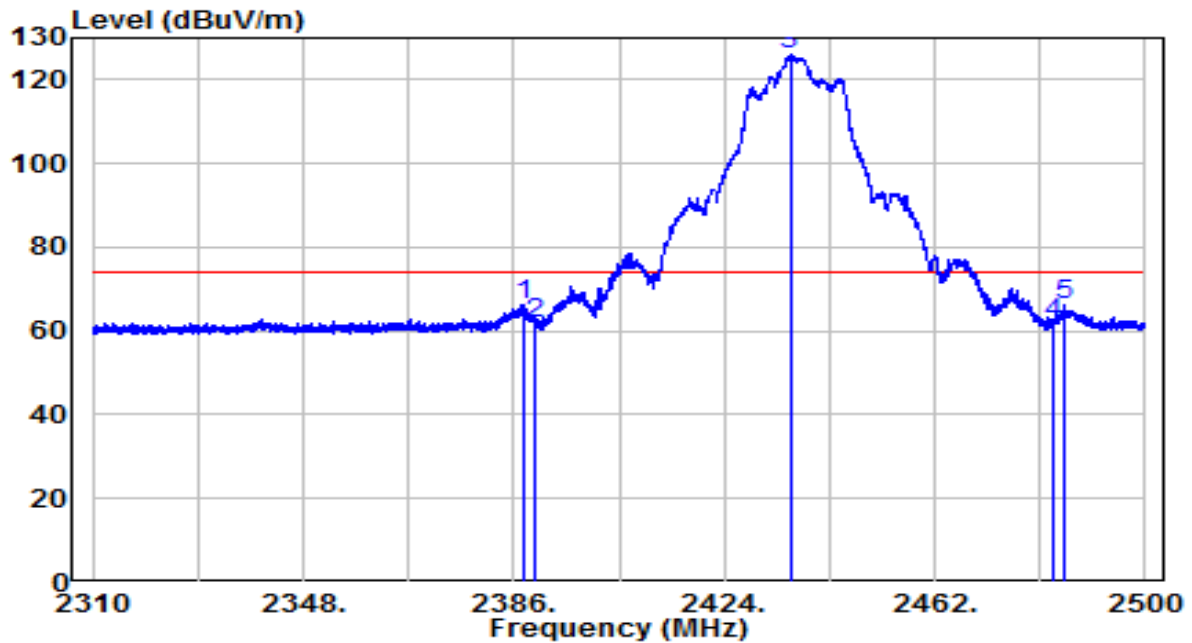


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2387.853	34.23	31.94	66.17	-7.83	74.00	Peak
2	2390.000	29.88	31.95	61.82	-12.18	74.00	Peak
3	2435.875	93.74	32.12	125.86	N/A	N/A	Peak
4	2483.500	29.31	32.30	61.61	-12.39	74.00	Peak
5	* 2485.607	34.00	32.31	66.31	-7.69	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C / 70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2437MHz	Test Voltage	AC 120V/60Hz

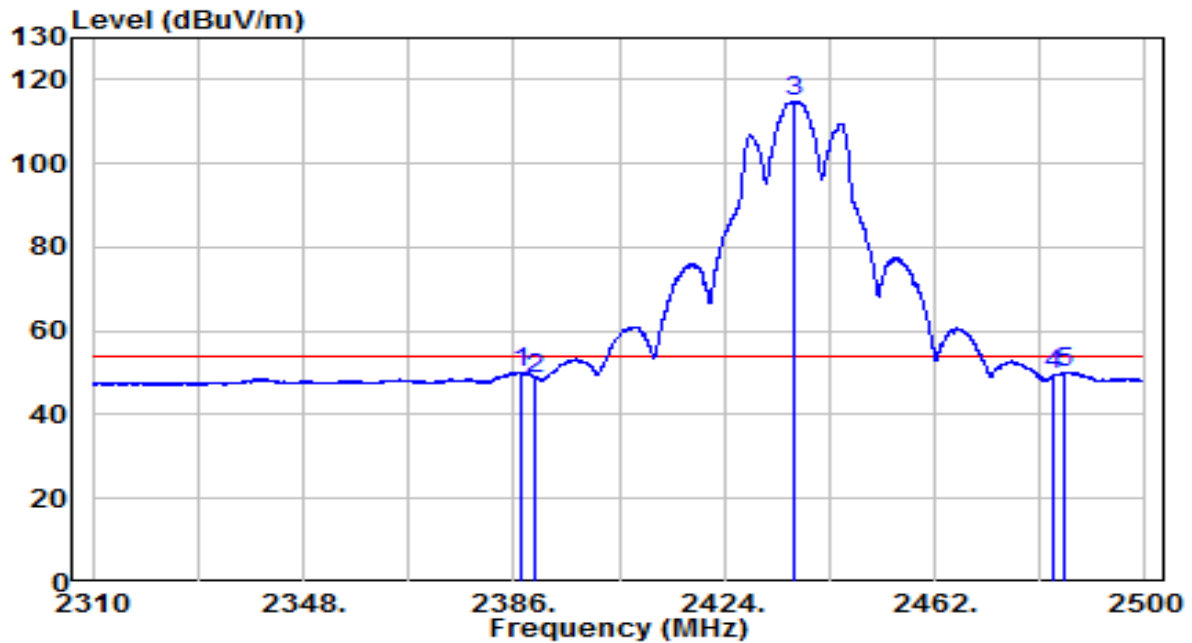


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2387.472	18.27	31.94	50.21	-3.79	54.00	Average
2		2390.000	16.79	31.95	48.73	-5.27	54.00	Average
3		2436.445	82.81	32.12	114.93	N/A	N/A	Average
4		2483.500	17.10	32.30	49.40	-4.60	54.00	Average
5		2485.465	17.77	32.31	50.07	-3.93	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2462MHz	Test Voltage	AC 120V/60Hz

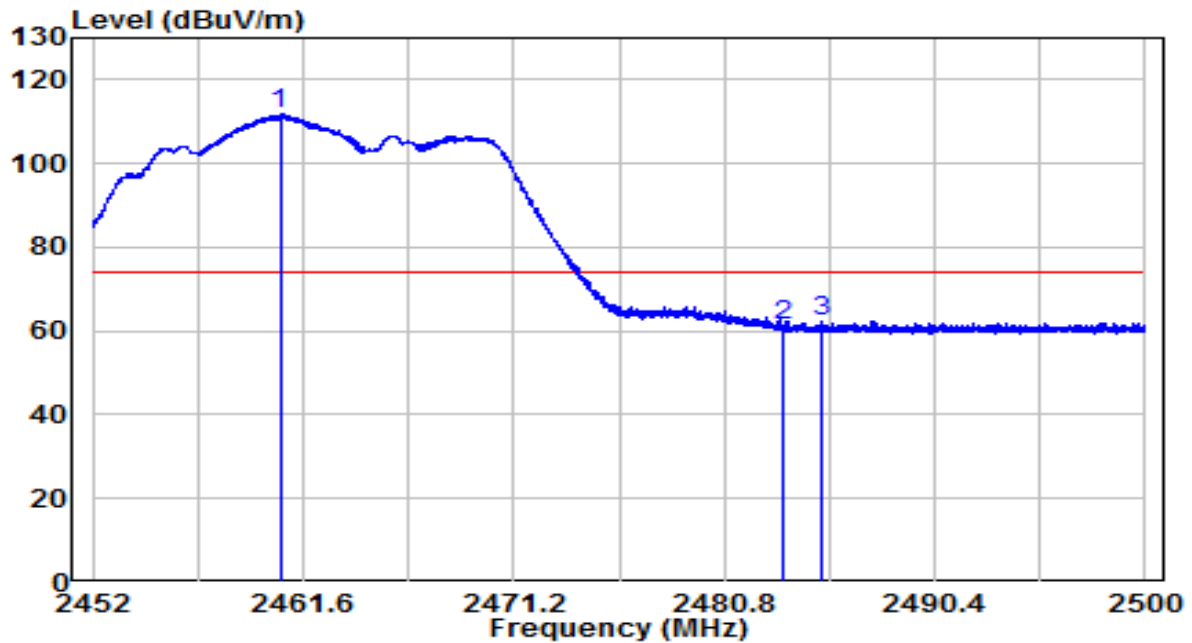


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2460.538	79.44	32.21	111.65	N/A	N/A	Peak
2	2483.500	29.02	32.30	61.31	-12.69	74.00	Peak
3	* 2485.301	30.06	32.31	62.36	-11.64	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C / 70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2462MHz	Test Voltage	AC 120V/60Hz

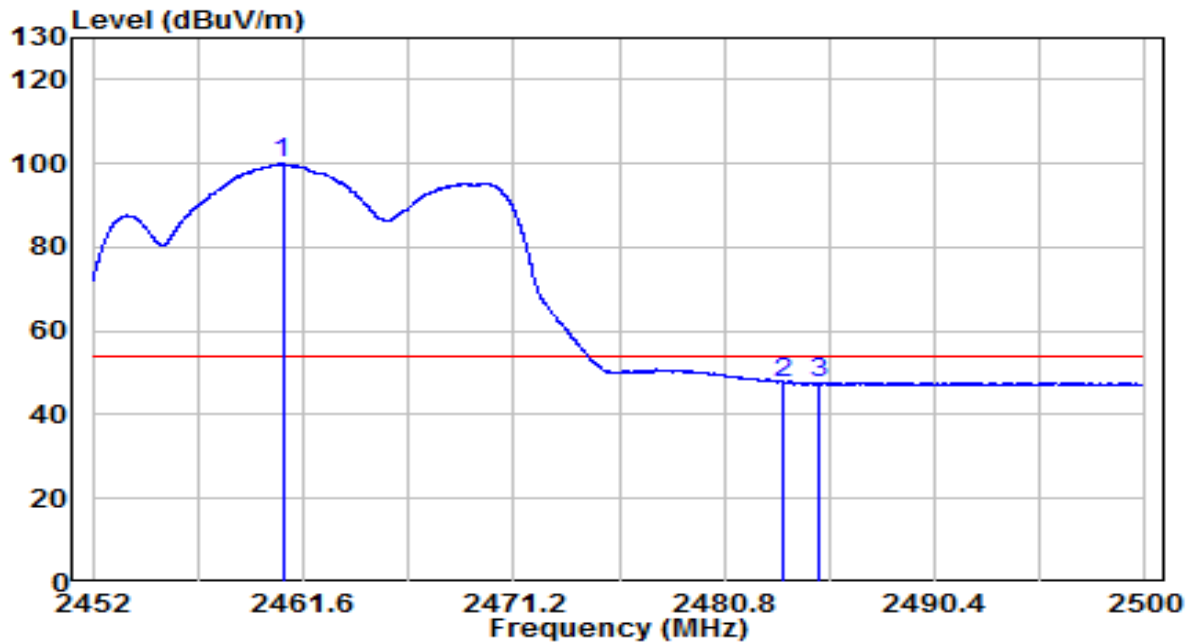


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2460.661	67.68	32.21	99.90	N/A	N/A	Average
2	* 2483.500	15.51	32.30	47.81	-6.19	54.00	Average
3	2485.067	15.37	32.30	47.68	-6.32	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2462MHz	Test Voltage	AC 120V/60Hz

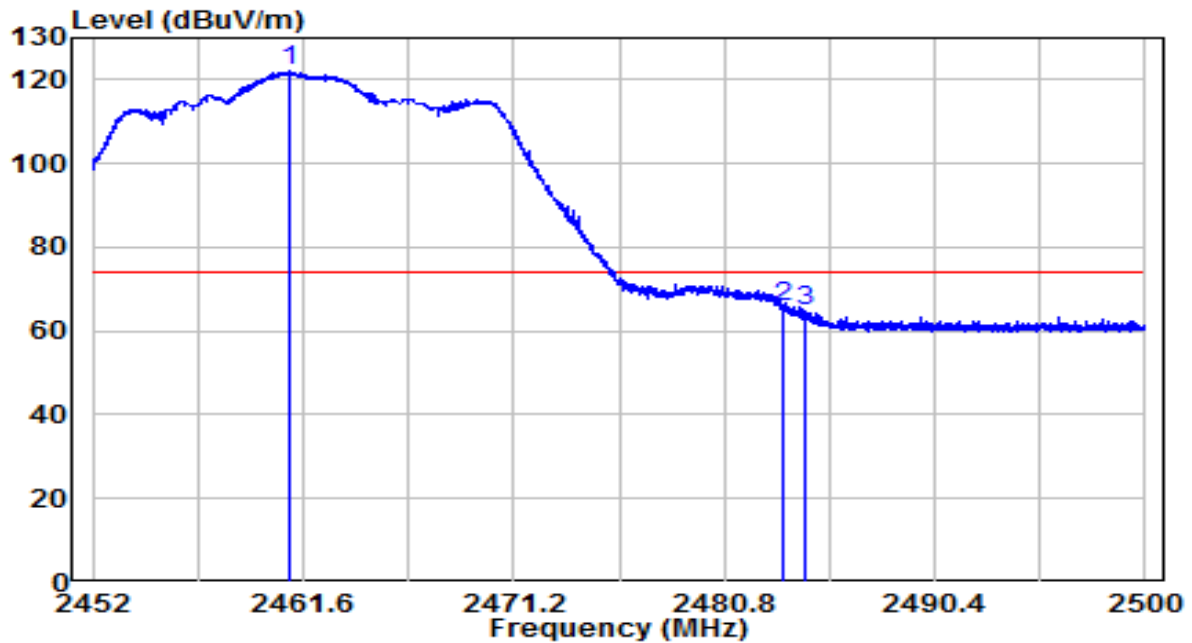


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2461.005	89.94	32.21	122.15	N/A	N/A	Peak
2	* 2483.500	33.54	32.30	65.84	-8.16	74.00	Peak
3	2484.531	32.29	32.30	64.59	-9.41	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C / 70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-20MHz at Channel 2462MHz	Test Voltage	AC 120V/60Hz

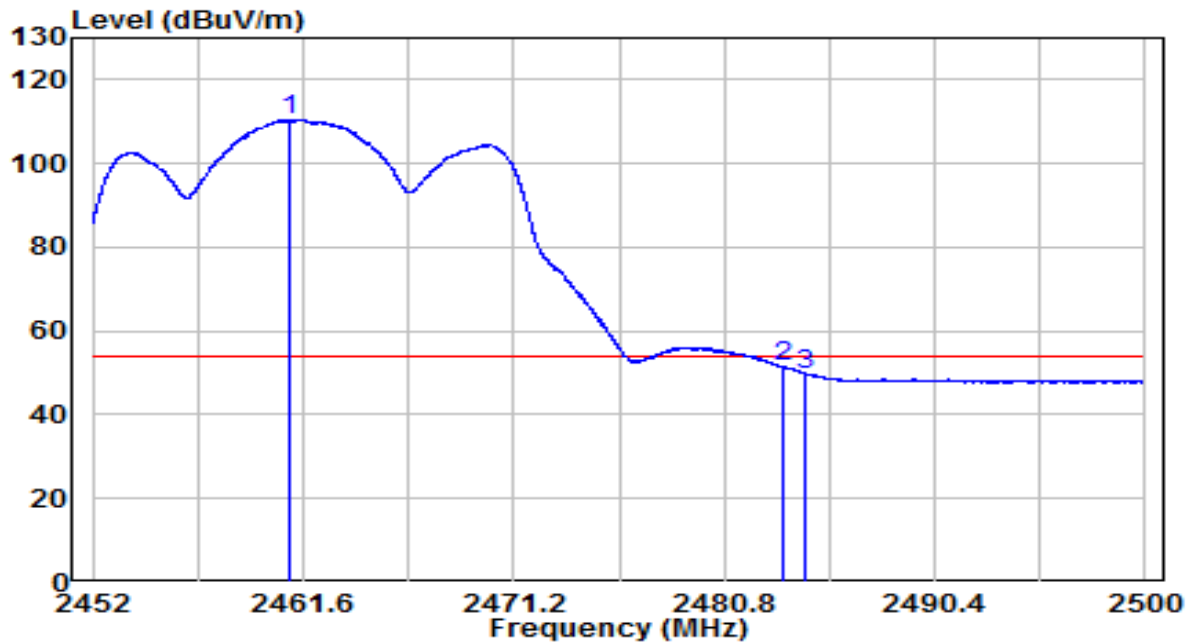


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2461.019	78.25	32.21	110.47	N/A	N/A	Average
2	* 2483.500	19.16	32.30	51.46	-2.54	54.00	Average
3	2484.490	17.48	32.30	49.78	-4.22	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2422MHz	Test Voltage	AC 120V/60Hz

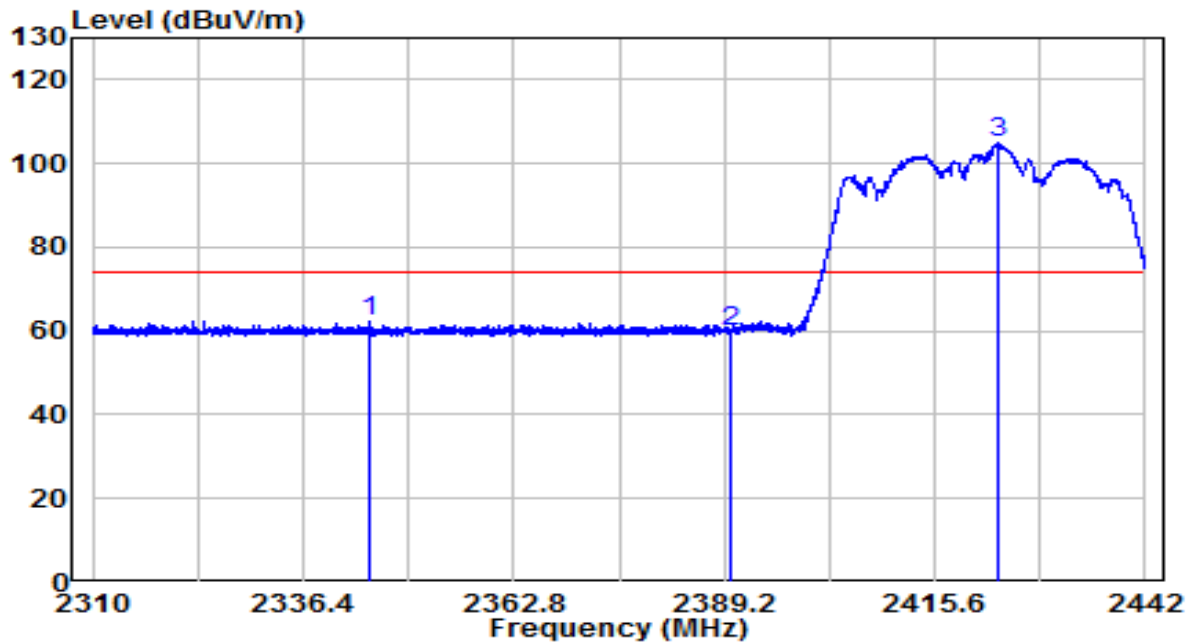


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2344.615	30.64	31.78	62.42	-11.58	74.00	Peak
2		2390.000	27.92	31.95	59.87	-14.13	74.00	Peak
3		2423.610	72.70	32.07	104.77	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2422MHz	Test Voltage	AC 120V/60Hz

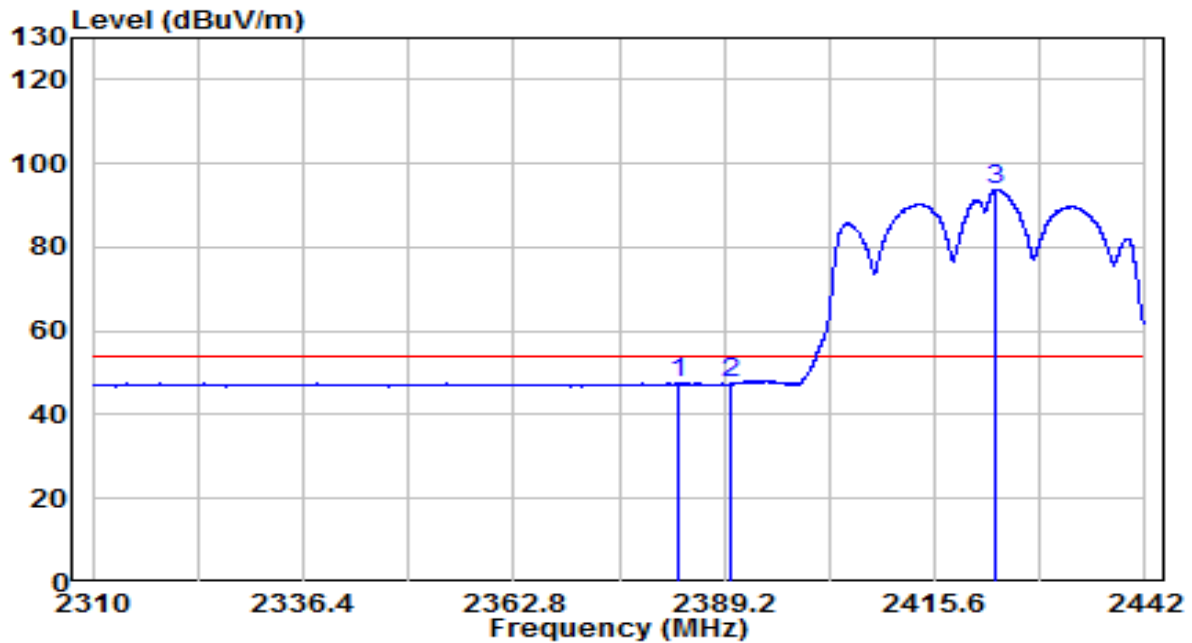


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2383.395	15.66	31.92	47.58	-6.42	54.00	Average
2		2390.000	15.49	31.95	47.44	-6.56	54.00	Average
3		2423.295	61.76	32.07	93.83	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2422MHz	Test Voltage	AC 120V/60Hz

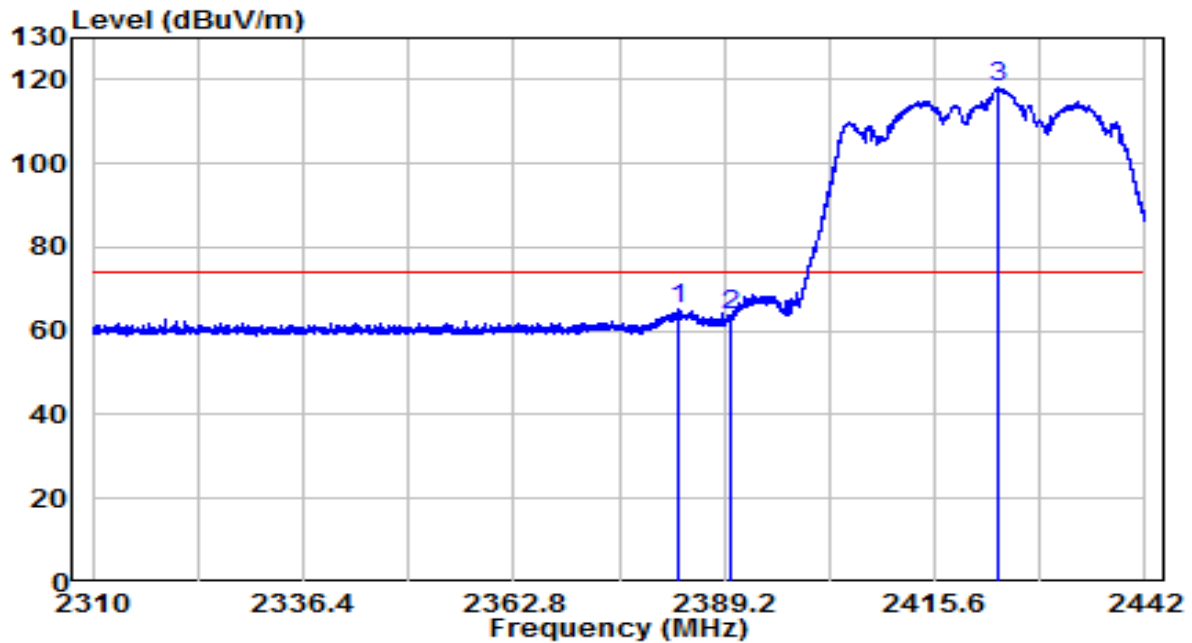


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2383.290	33.26	31.92	65.19	-8.81	74.00	Peak
2		2390.000	31.71	31.95	63.66	-10.34	74.00	Peak
3		2423.575	85.98	32.07	118.05	N/A	N/A	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2422MHz	Test Voltage	AC 120V/60Hz

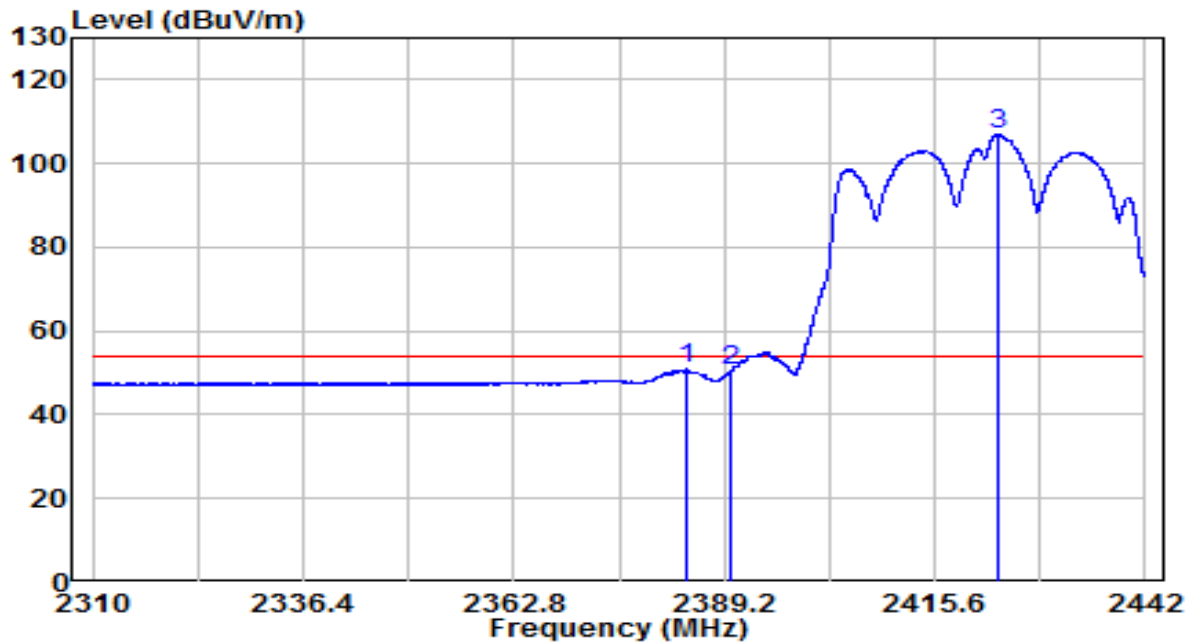


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2384.375	18.89	31.93	50.81	-3.19	54.00	Average
2		2390.000	18.50	31.95	50.44	-3.56	54.00	Average
3		2423.645	74.92	32.07	106.99	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2437MHz	Test Voltage	AC 120V/60Hz

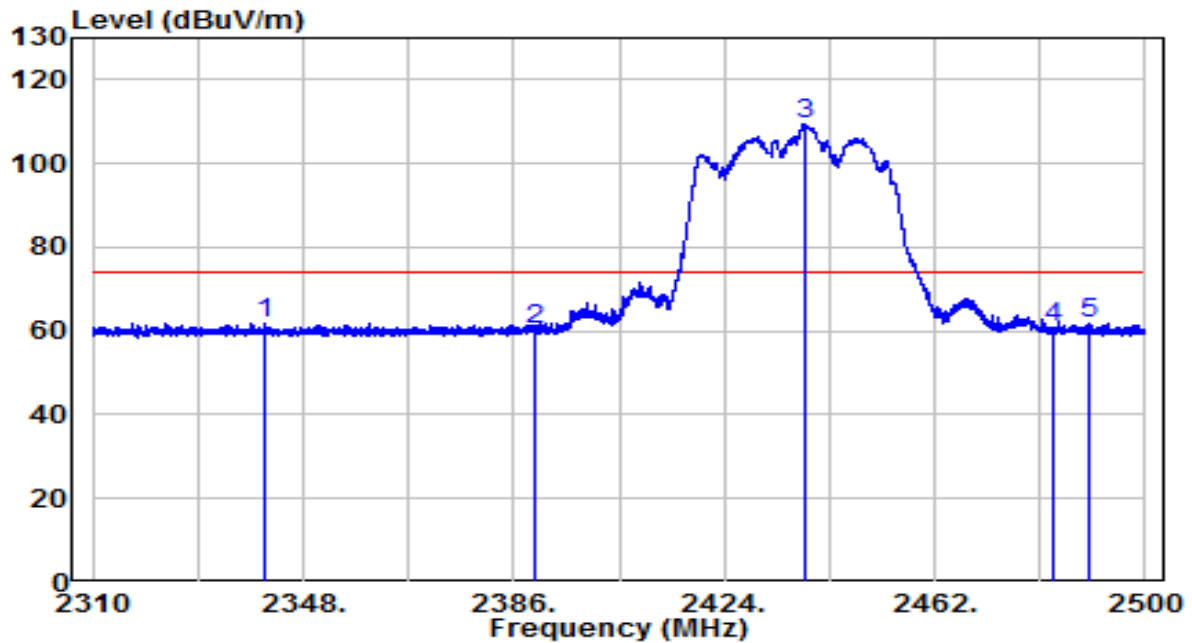


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2340.875	30.13	31.76	61.89	-12.11	74.00	Peak
2		2390.000	28.32	31.95	60.27	-13.73	74.00	Peak
3		2438.583	77.39	32.13	109.52	N/A	N/A	Peak
4		2483.500	28.29	32.30	60.59	-13.41	74.00	Peak
5		2489.692	29.47	32.32	61.80	-12.20	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C / 70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2437MHz	Test Voltage	AC 120V/60Hz

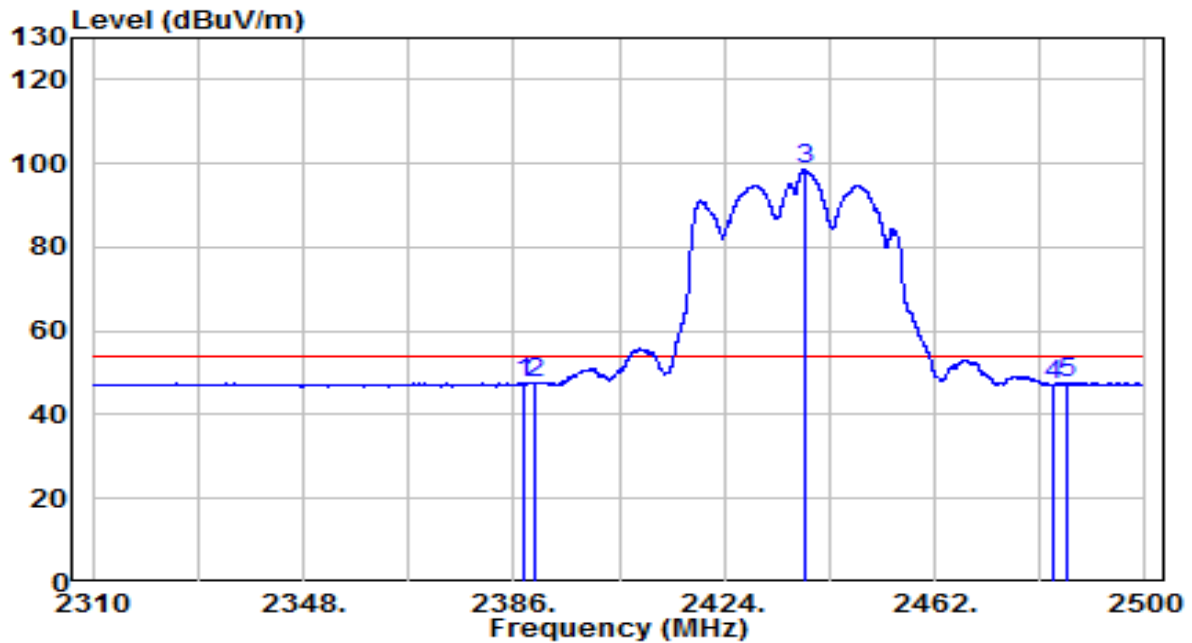


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	*	2387.615	15.56	31.94	47.50	-6.50	54.00	Average
2		2390.000	15.55	31.95	47.50	-6.50	54.00	Average
3		2438.488	66.38	32.13	98.51	N/A	N/A	Average
4		2483.500	14.92	32.30	47.22	-6.78	54.00	Average
5		2486.130	15.40	32.31	47.71	-6.29	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2437MHz	Test Voltage	AC 120V/60Hz

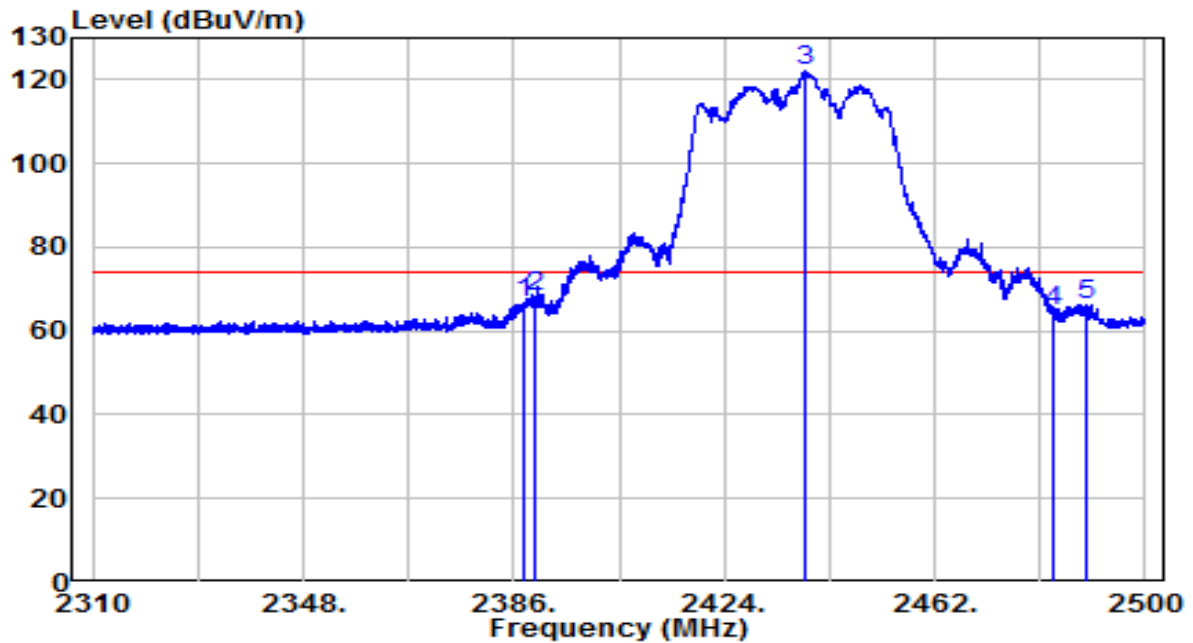


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2387.758	34.70	31.94	66.64	-7.36	74.00	Peak
2	* 2390.000	36.00	31.95	67.95	-6.05	74.00	Peak
3	2438.535	89.80	32.13	121.93	N/A	N/A	Peak
4	2483.500	32.50	32.30	64.80	-9.20	74.00	Peak
5	2489.597	34.10	32.32	66.42	-7.58	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C / 70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2437MHz	Test Voltage	AC 120V/60Hz

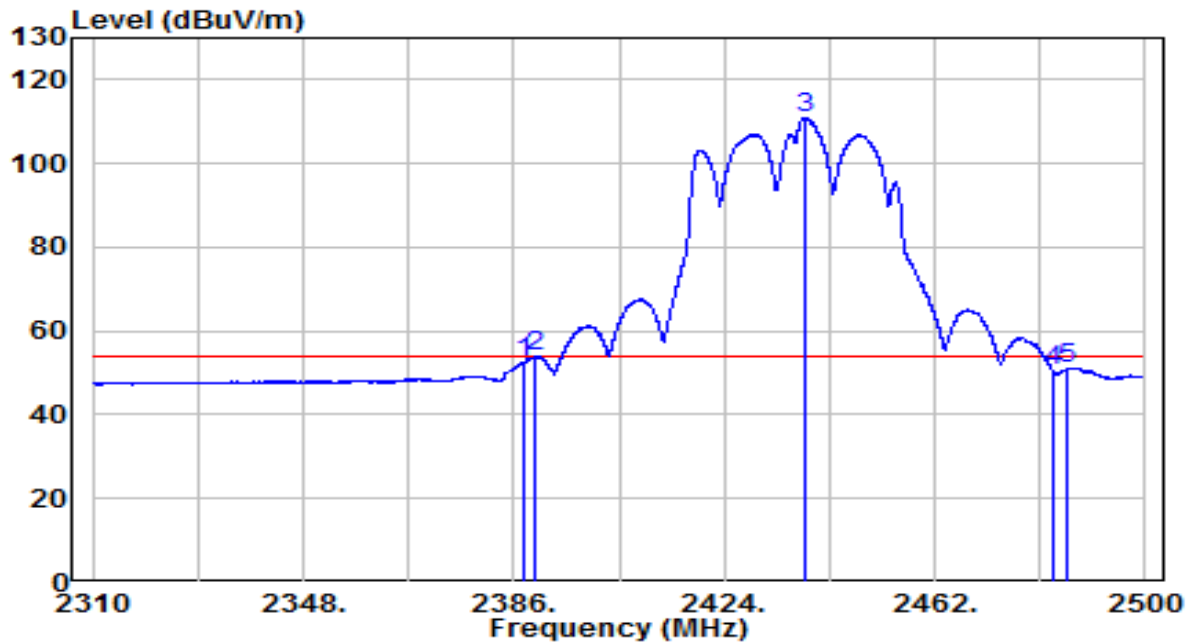


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2387.758	20.71	31.94	52.65	-1.35	54.00	Average
2	* 2390.000	21.82	31.95	53.77	-0.23	54.00	Average
3	2438.440	78.83	32.13	110.96	N/A	N/A	Average
4	2483.500	17.99	32.30	50.29	-3.71	54.00	Average
5	2486.035	18.96	32.31	51.26	-2.74	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2452MHz	Test Voltage	AC 120V/60Hz

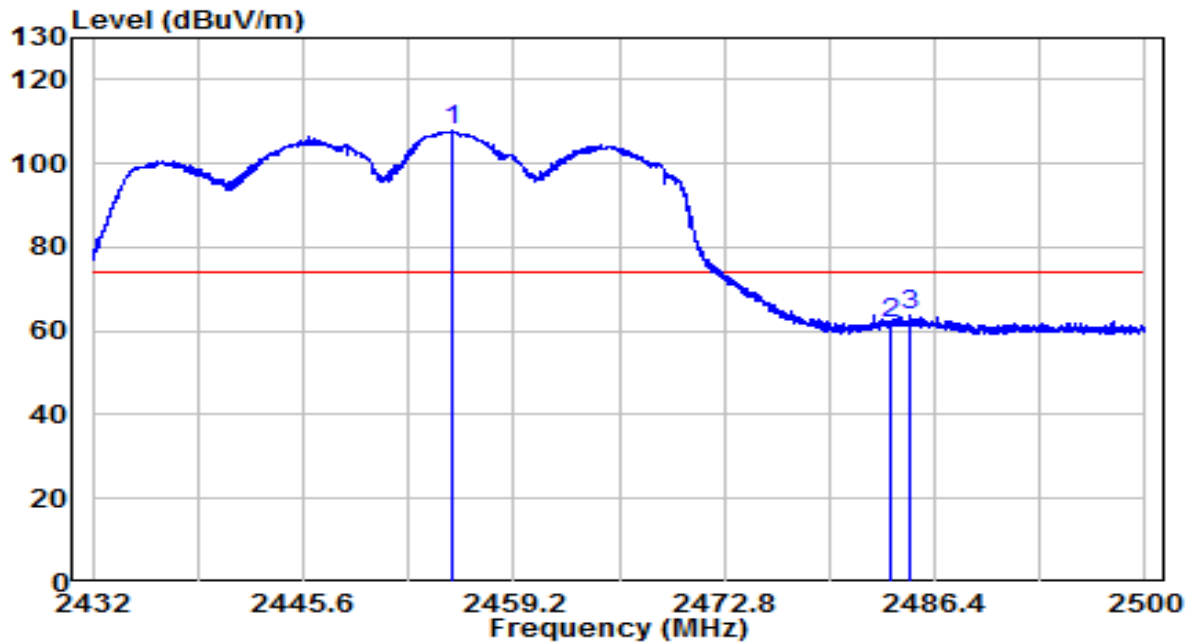


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2455.244	75.49	32.19	107.68	N/A	N/A	Peak
2	2483.500	29.34	32.30	61.64	-12.36	74.00	Peak
3	* 2484.775	31.53	32.30	63.84	-10.16	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2452MHz	Test Voltage	AC 120V/60Hz

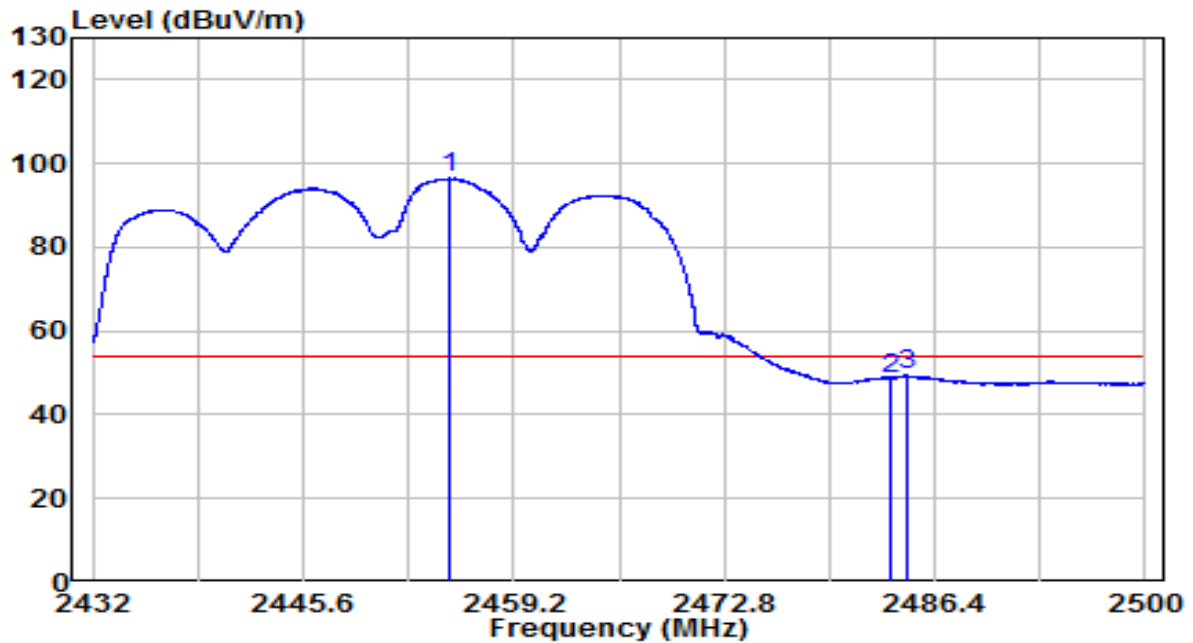


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2455.075	64.27	32.19	96.46	N/A	N/A	Average
2	2483.500	16.51	32.30	48.81	-5.19	54.00	Average
3	* 2484.663	17.04	32.30	49.34	-4.66	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2452MHz	Test Voltage	AC 120V/60Hz

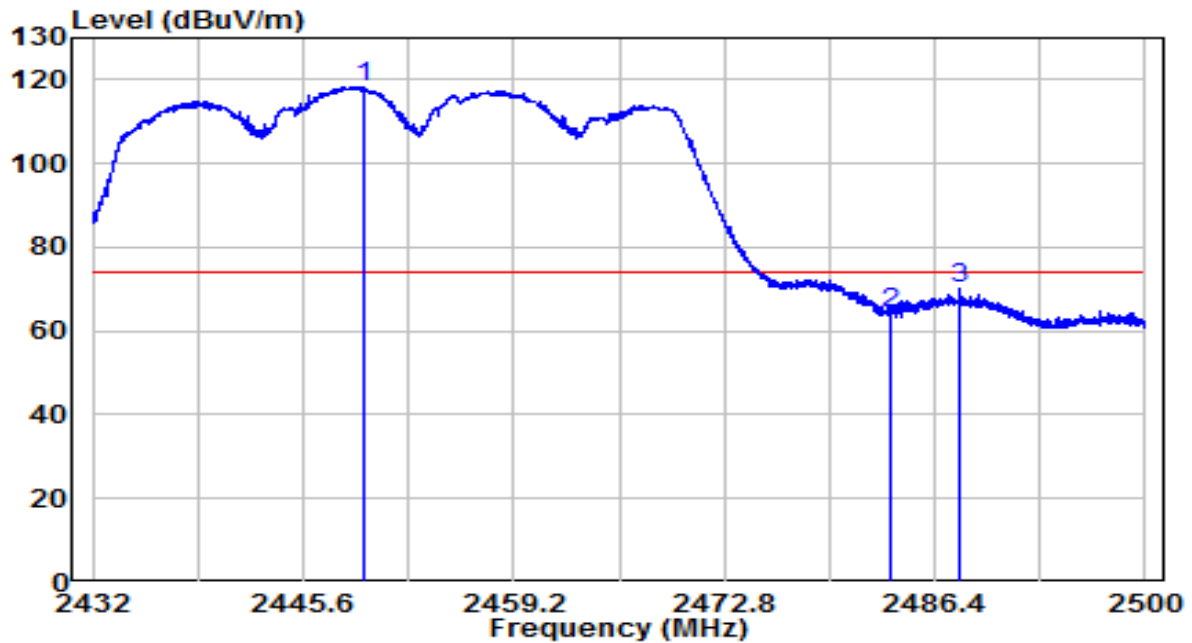


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2449.525	86.16	32.17	118.33	N/A	N/A	Peak
2	2483.500	31.80	32.30	64.09	-9.91	74.00	Peak
3	* 2488.075	37.72	32.32	70.04	-3.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /70%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	Transmit by 802.11n-40MHz at Channel 2452MHz	Test Voltage	AC 120V/60Hz

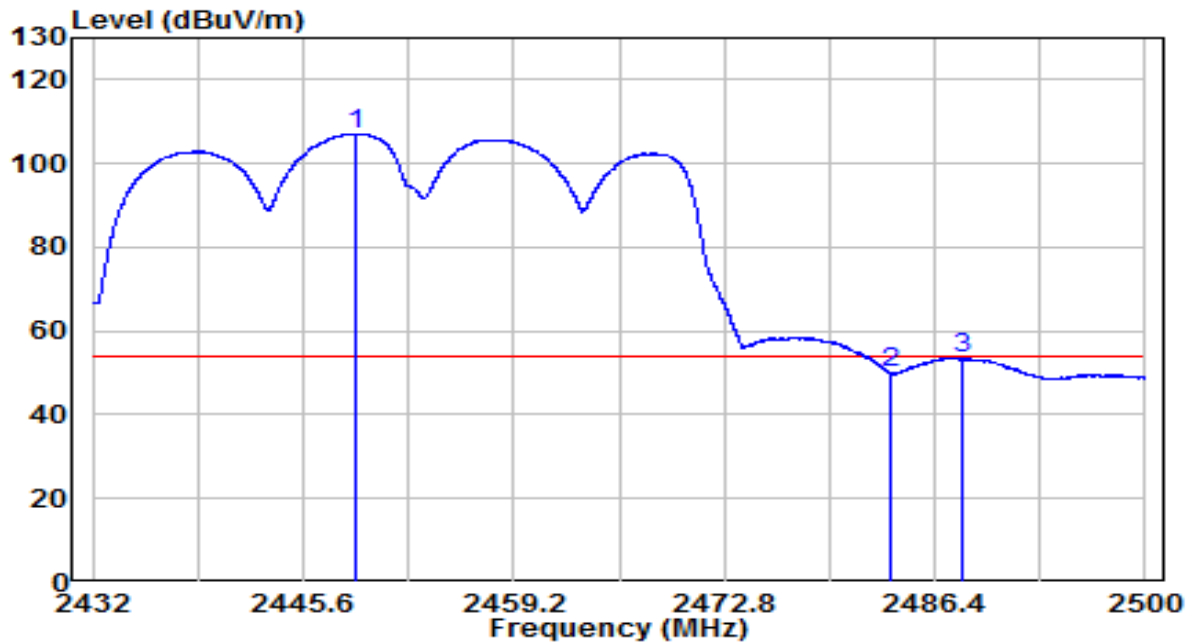


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2449.000	74.98	32.17	107.15	N/A	N/A	Average
2	2483.500	17.92	32.30	50.22	-3.78	54.00	Average
3	* 2488.225	21.40	32.32	53.71	-0.29	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412 MHz	Test Voltage	AC 120V/60Hz

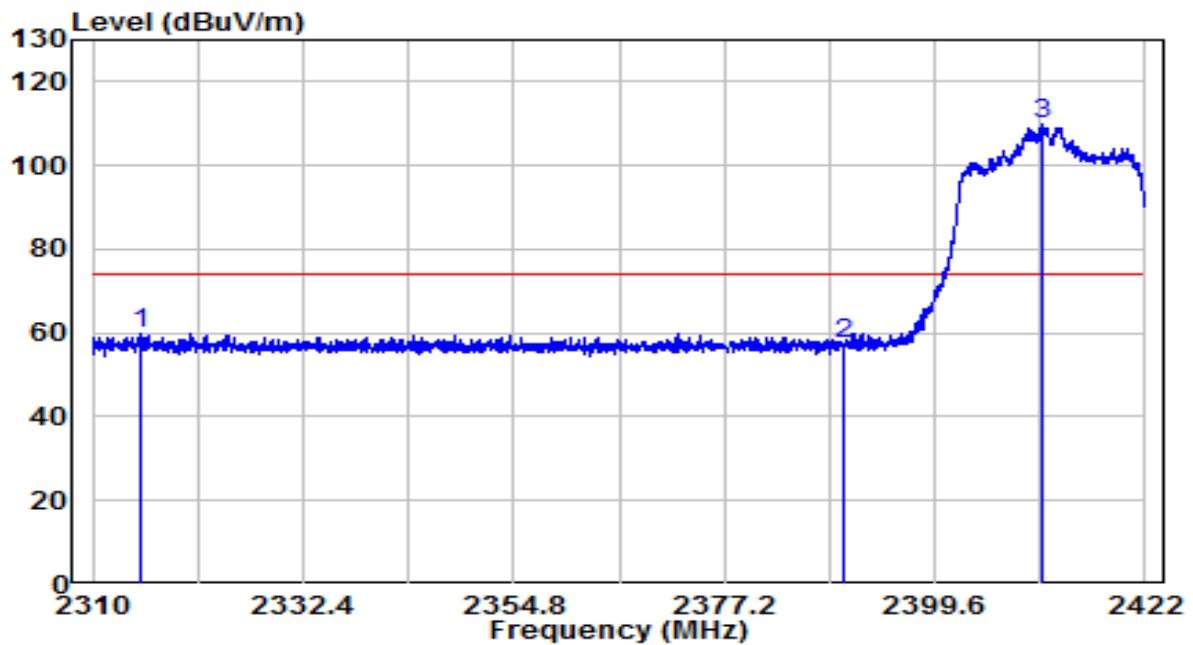


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2315.096	28.00	31.90	59.90	-14.10	74.00	Peak
2	2390.000	25.26	32.22	57.48	-16.52	74.00	Peak
3	* 2410.912	77.51	32.31	109.82	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412 MHz	Test Voltage	AC 120V/60Hz

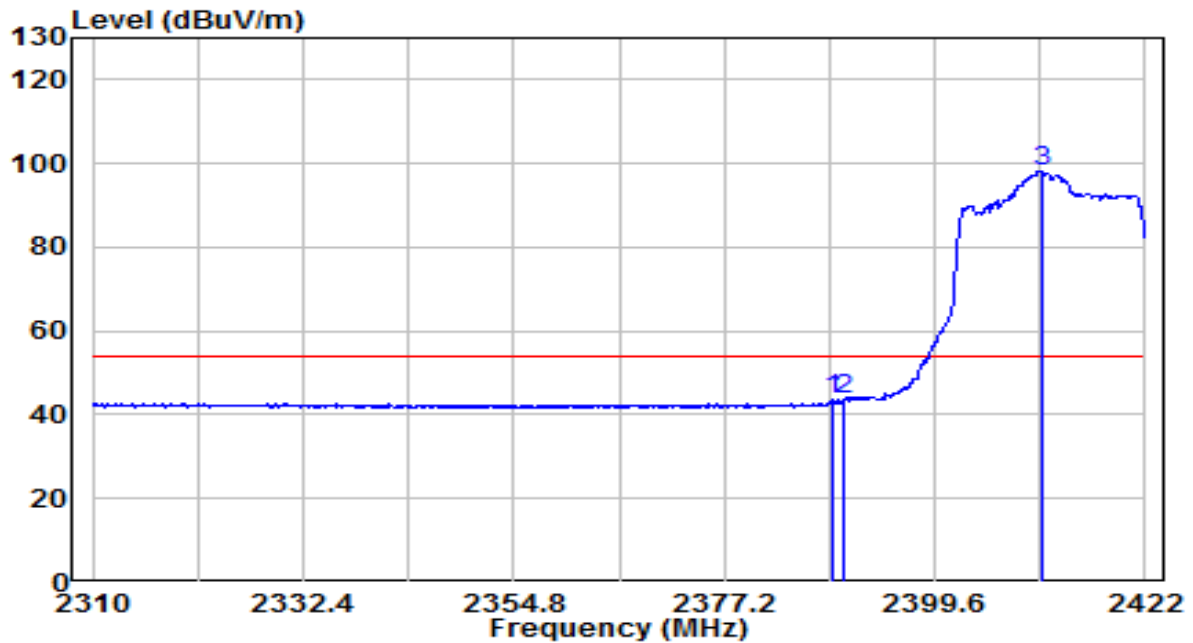


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2388.736	11.38	32.21	43.59	-10.41	54.00	Average
2	2390.000	11.37	32.22	43.59	-10.41	54.00	Average
3	* 2410.912	66.04	32.31	98.34	N/A	N/A	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412 MHz	Test Voltage	AC 120V/60Hz

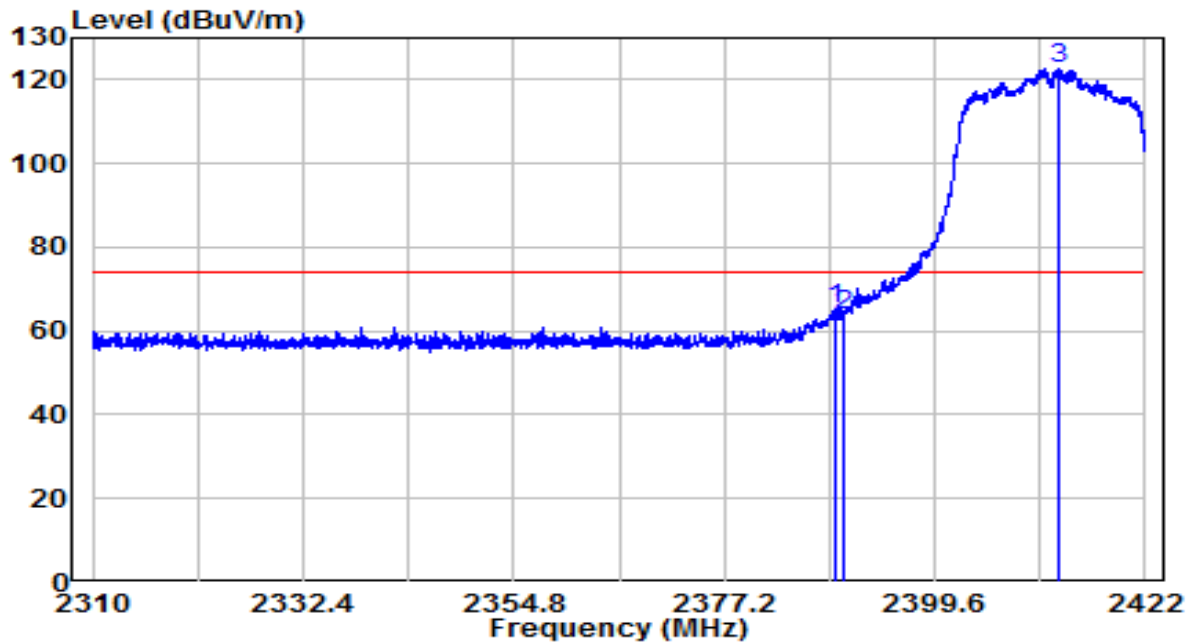


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2388.960	32.83	32.21	65.04	-8.96	74.00	Peak
2	2390.000	31.59	32.22	63.81	-10.19	74.00	Peak
3	* 2412.816	90.41	32.31	122.73	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2412 MHz	Test Voltage	AC 120V/60Hz

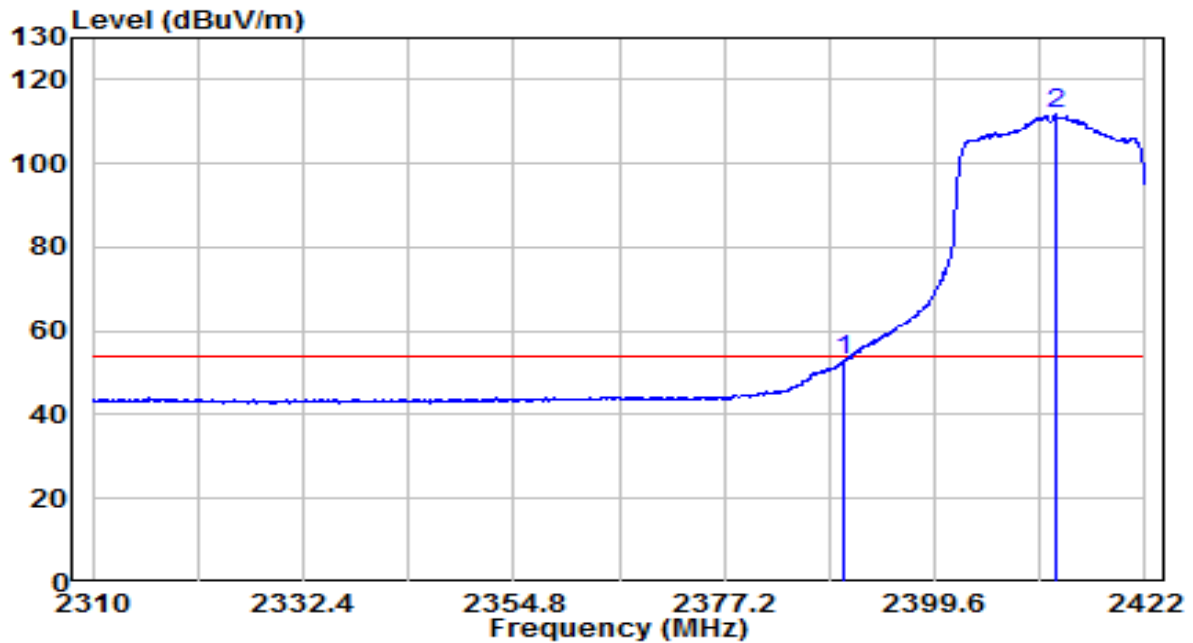


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	20.67	32.22	52.88	-1.12	54.00	Average
2	* 2412.592	79.36	32.31	111.68	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437 MHz	Test Voltage	AC 120V/60Hz

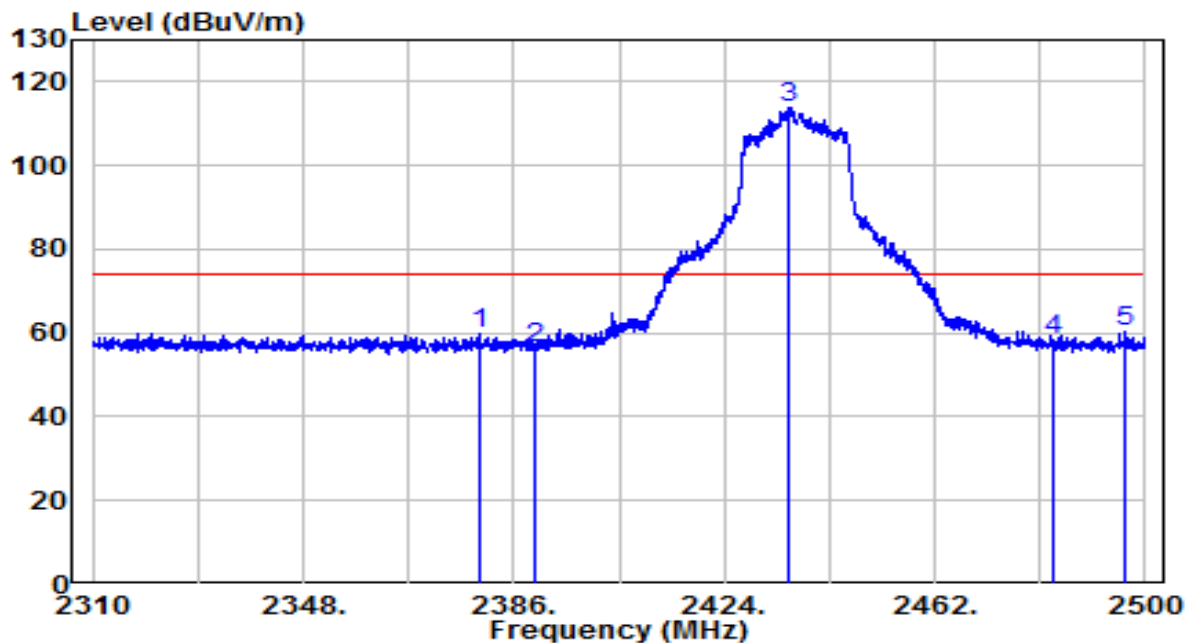


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2379.730	27.69	32.17	59.86	-14.14	74.00	Peak
2	2390.000	24.35	32.22	56.56	-17.44	74.00	Peak
3	* 2435.780	81.61	32.41	114.02	N/A	N/A	Peak
4	2483.500	25.83	32.61	58.44	-15.56	74.00	Peak
5	2496.200	27.44	32.66	60.11	-13.89	74.00	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437 MHz	Test Voltage	AC 120V/60Hz

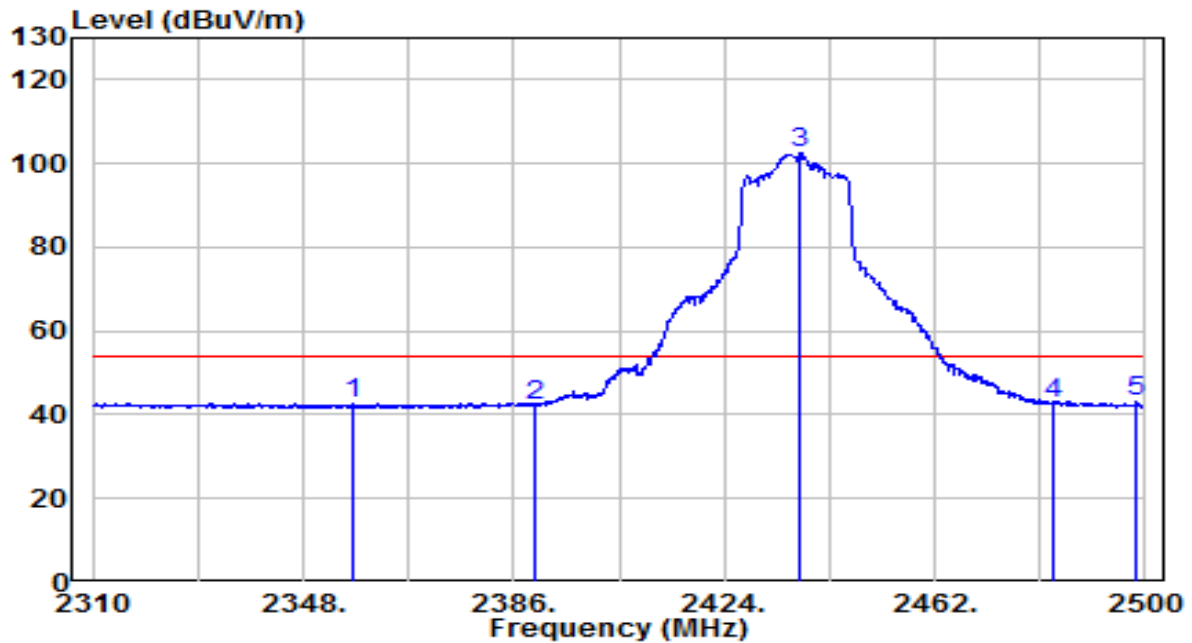


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2357.120	10.76	32.08	42.84	-11.16	54.00	Average
2	2390.000	10.05	32.22	42.27	-11.73	54.00	Average
3	* 2437.775	69.89	32.42	102.31	N/A	N/A	Average
4	2483.500	10.20	32.61	42.81	-11.19	54.00	Average
5	2498.385	10.27	32.67	42.94	-11.06	54.00	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437 MHz	Test Voltage	AC 120V/60Hz

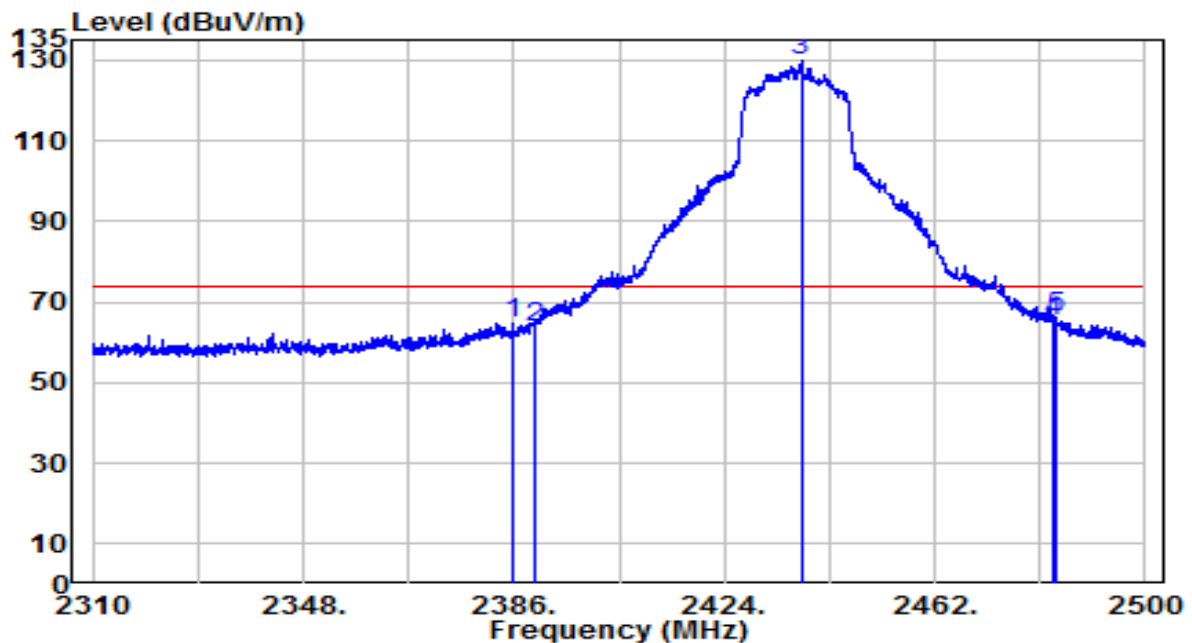


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2385.715	32.63	32.20	64.83	-9.17	74.00	Peak
2	2390.000	31.51	32.22	63.73	-10.27	74.00	Peak
3	* 2437.870	97.31	32.42	129.73	N/A	N/A	Peak
4	2483.500	32.67	32.61	65.28	-8.72	74.00	Peak
5	2484.040	33.72	32.61	66.33	-7.67	74.00	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2437 MHz	Test Voltage	AC 120V/60Hz

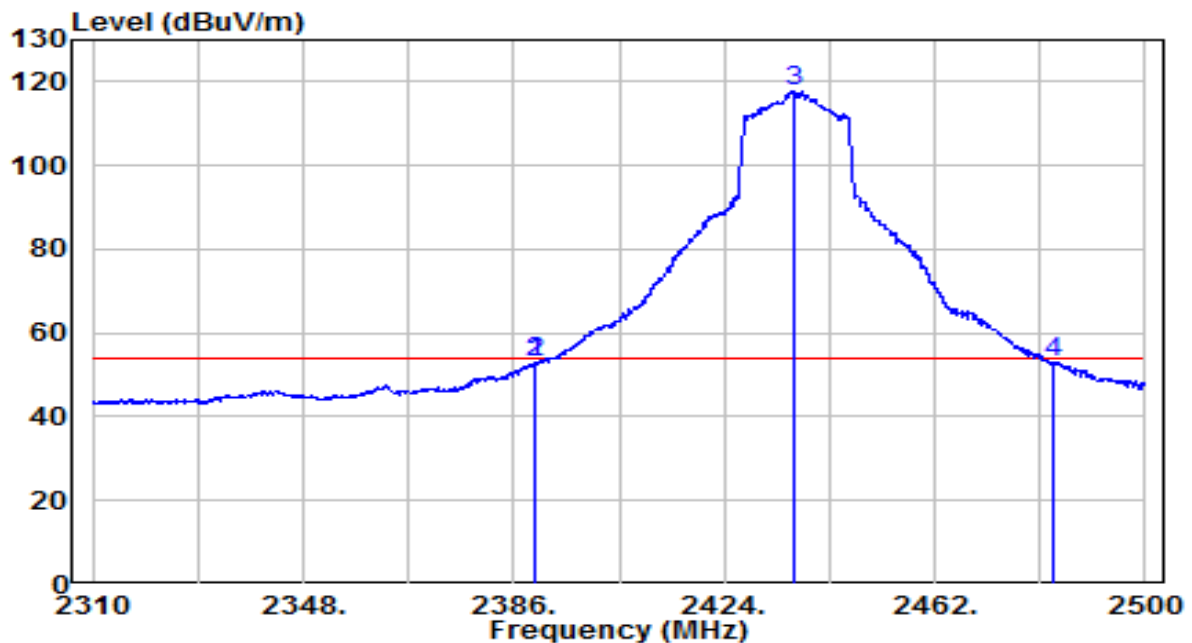


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2389.705	20.88	32.22	53.09	-0.91	54.00	Average
2	2390.000	20.85	32.22	53.07	-0.93	54.00	Average
3	* 2436.445	85.40	32.41	117.81	N/A	N/A	Average
4	2483.500	20.40	32.61	53.02	-0.98	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462 MHz	Test Voltage	AC 120V/60Hz

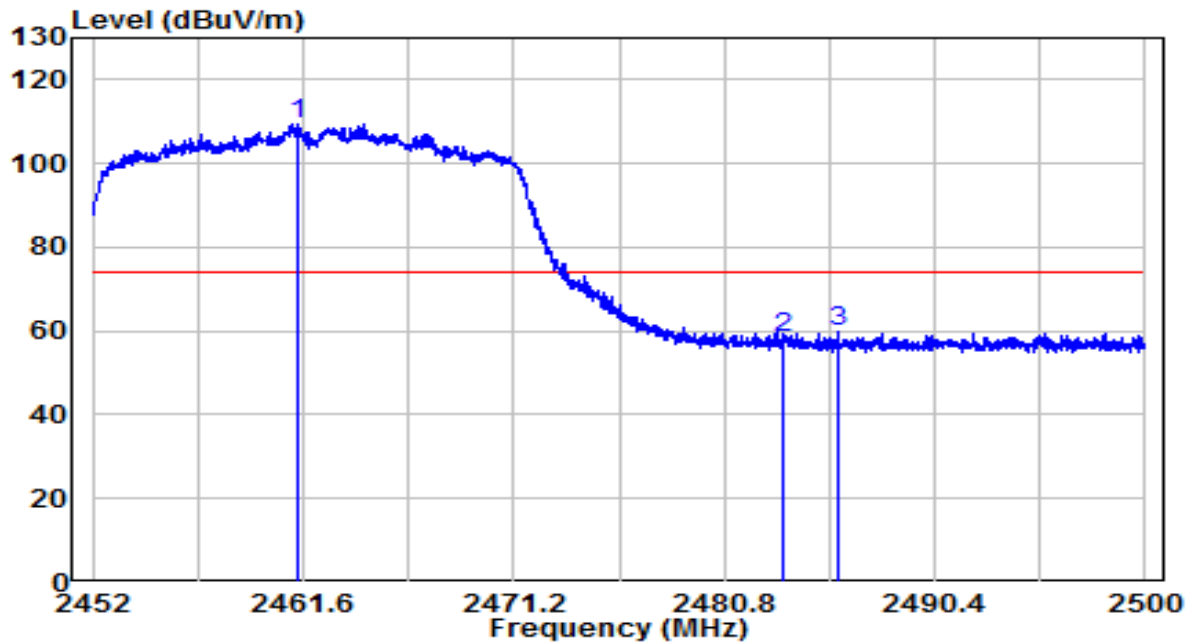


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2461.336	77.04	32.52	109.55	N/A	N/A	Peak
2		2483.500	25.99	32.61	58.60	-15.40	74.00	Peak
3		2486.032	27.42	32.62	60.04	-13.96	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462 MHz	Test Voltage	AC 120V/60Hz

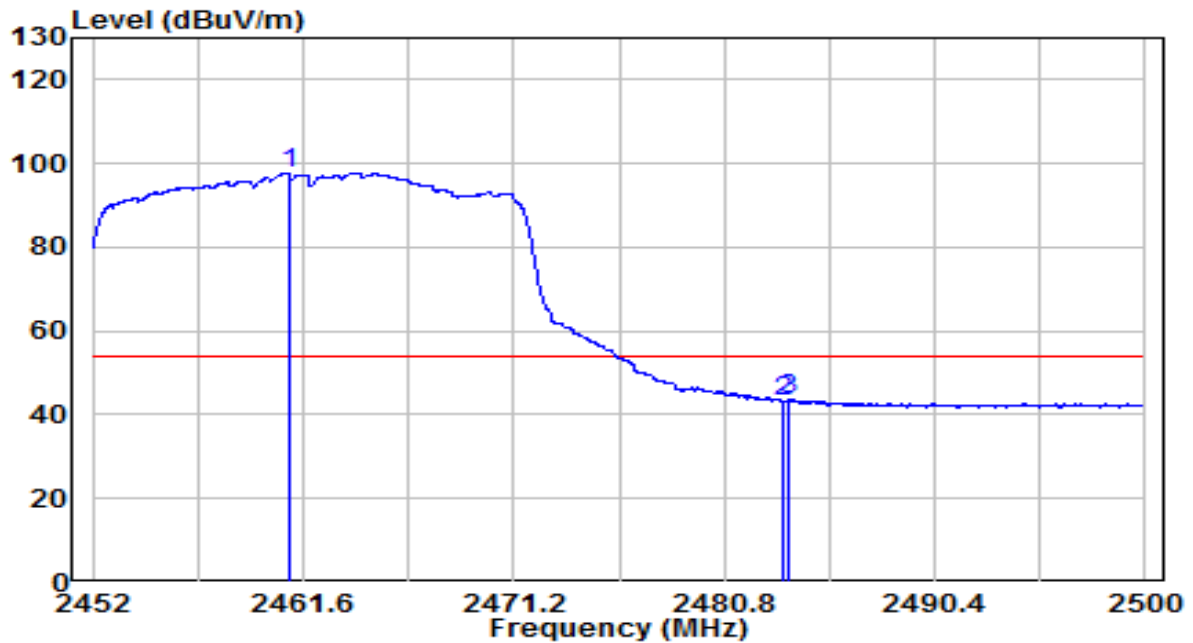


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2460.928	65.24	32.52	97.76	N/A	N/A	Average
2		2483.500	10.68	32.61	43.29	-10.71	54.00	Average
3		2483.776	11.06	32.61	43.67	-10.33	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462 MHz	Test Voltage	AC 120V/60Hz

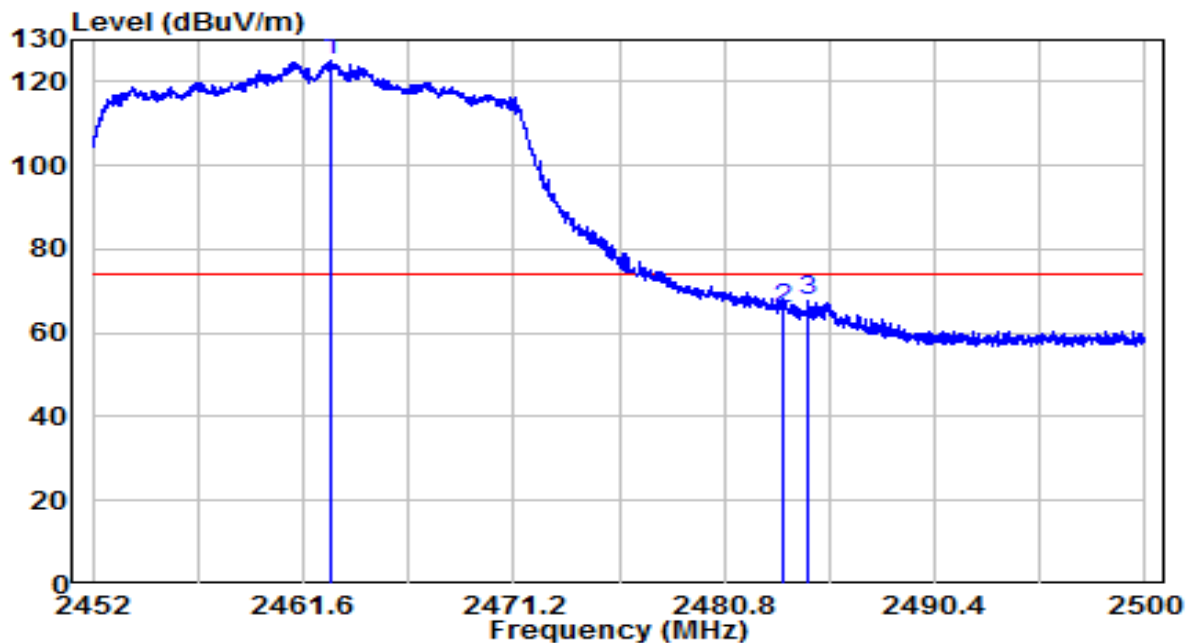


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.896	92.39	32.52	124.91	N/A	N/A	Peak
2		2483.500	33.21	32.61	65.82	-8.18	74.00	Peak
3		2484.664	34.95	32.62	67.56	-6.44	74.00	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE20 at Channel 2462 MHz	Test Voltage	AC 120V/60Hz

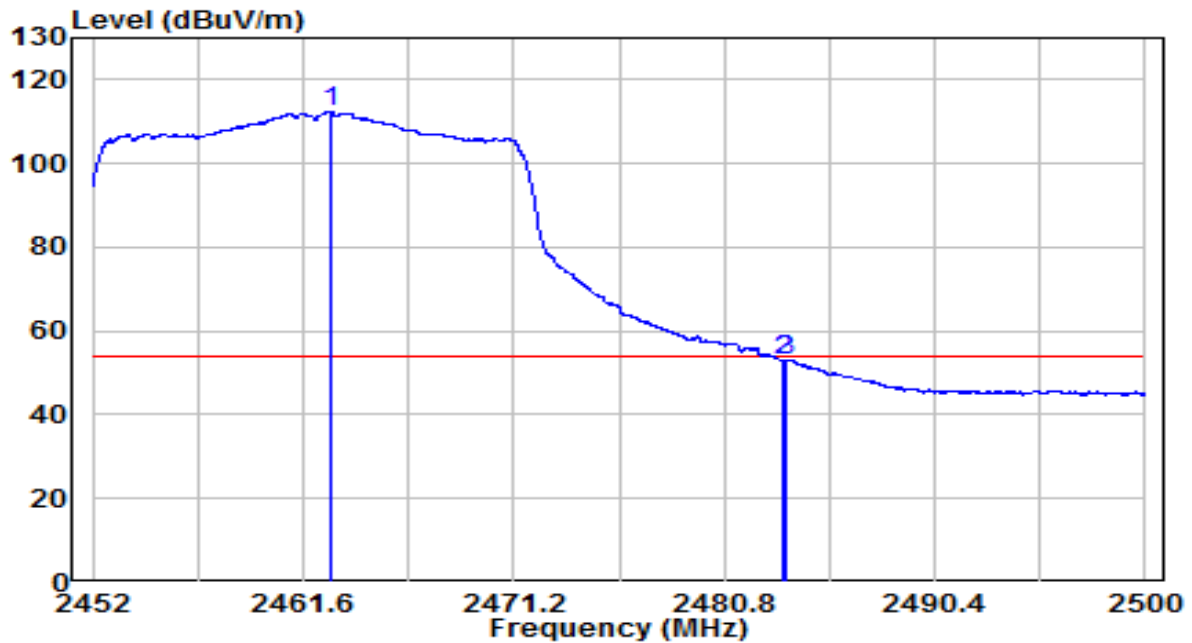


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2462.848	80.05	32.52	112.58	N/A	N/A	Average
2		2483.500	20.50	32.61	53.11	-0.89	54.00	Average
3		2483.608	20.62	32.61	53.23	-0.77	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	AC 120V/60Hz

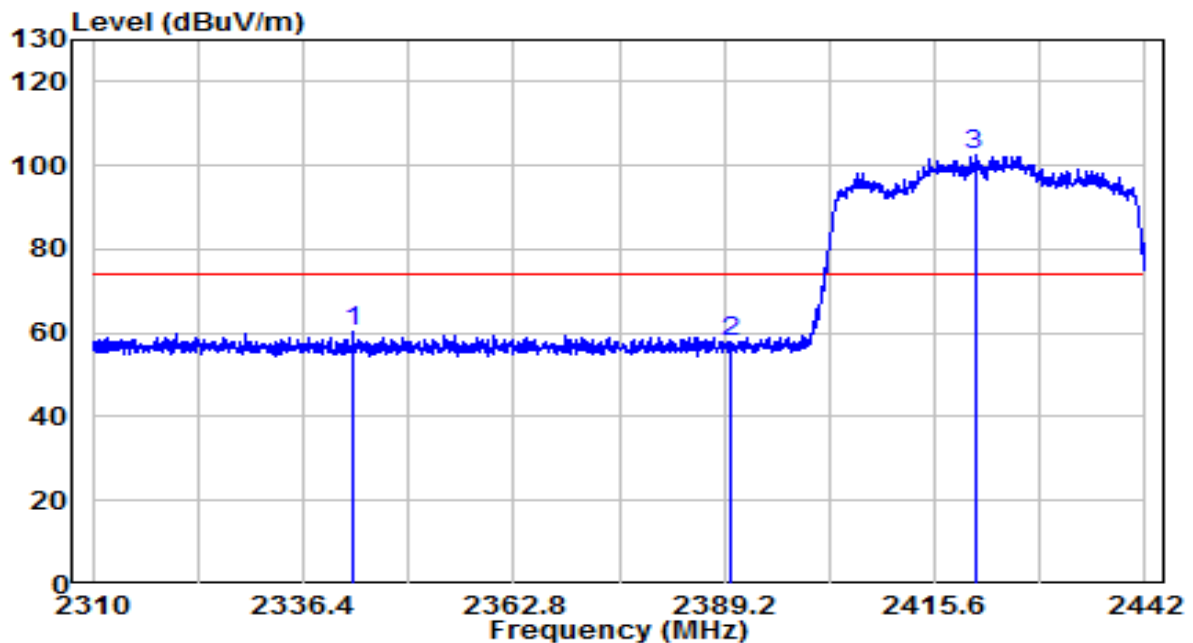


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2342.802	28.10	32.02	60.12	-13.88	74.00	Peak
2	2389.992	25.55	32.22	57.77	-16.23	74.00	Peak
3	* 2420.616	70.22	32.35	102.57	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	AC 120V/60Hz

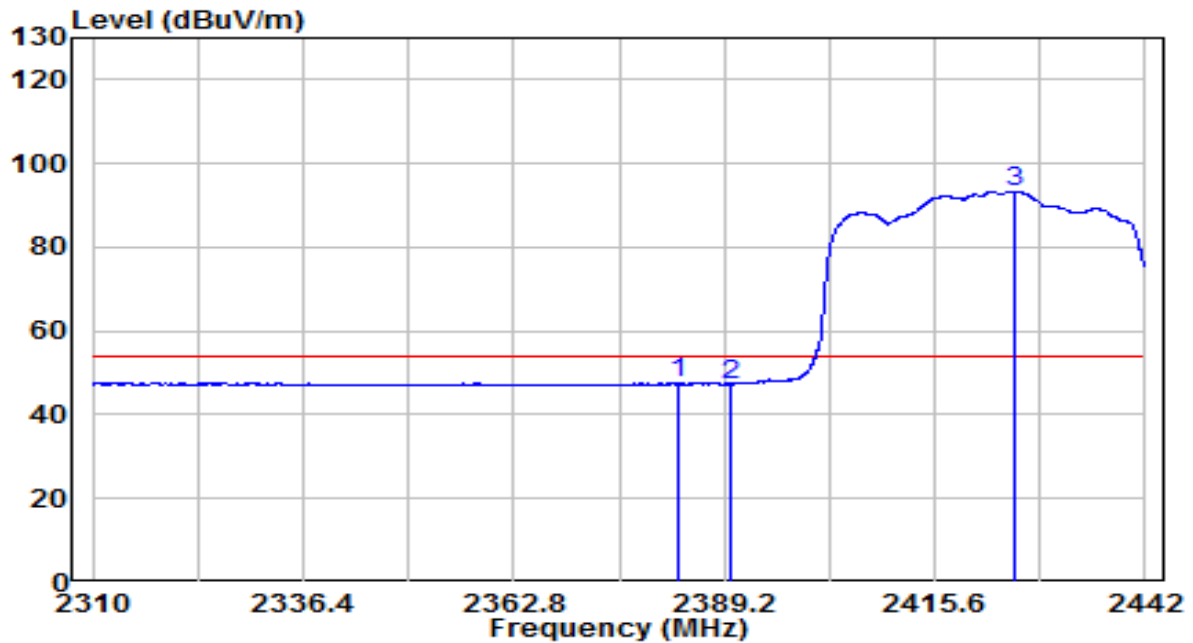


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2383.590	15.44	32.19	47.63	-6.37	54.00	Average
2	2390.000	15.10	32.22	47.32	-6.68	54.00	Average
3	* 2425.698	61.06	32.37	93.43	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	AC 120V/60Hz

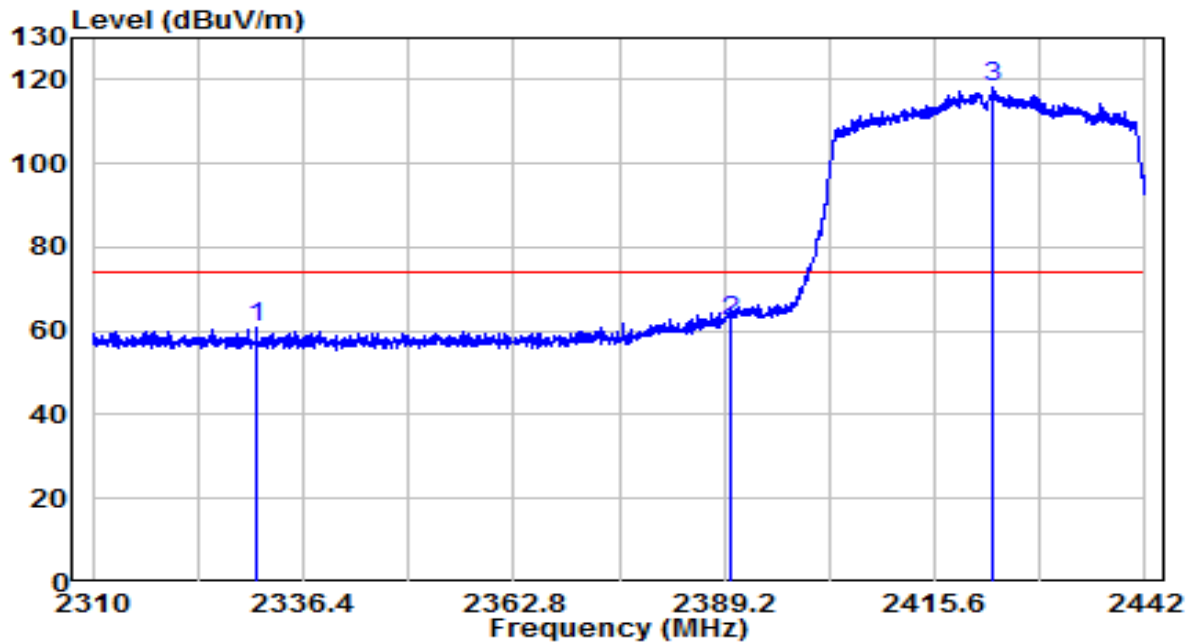


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2330.460	28.64	31.97	60.60	-13.40	74.00	Peak
2	2390.000	30.23	32.22	62.45	-11.55	74.00	Peak
3	* 2422.794	85.63	32.36	117.99	N/A	N/A	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2422MHz	Test Voltage	AC 120V/60Hz

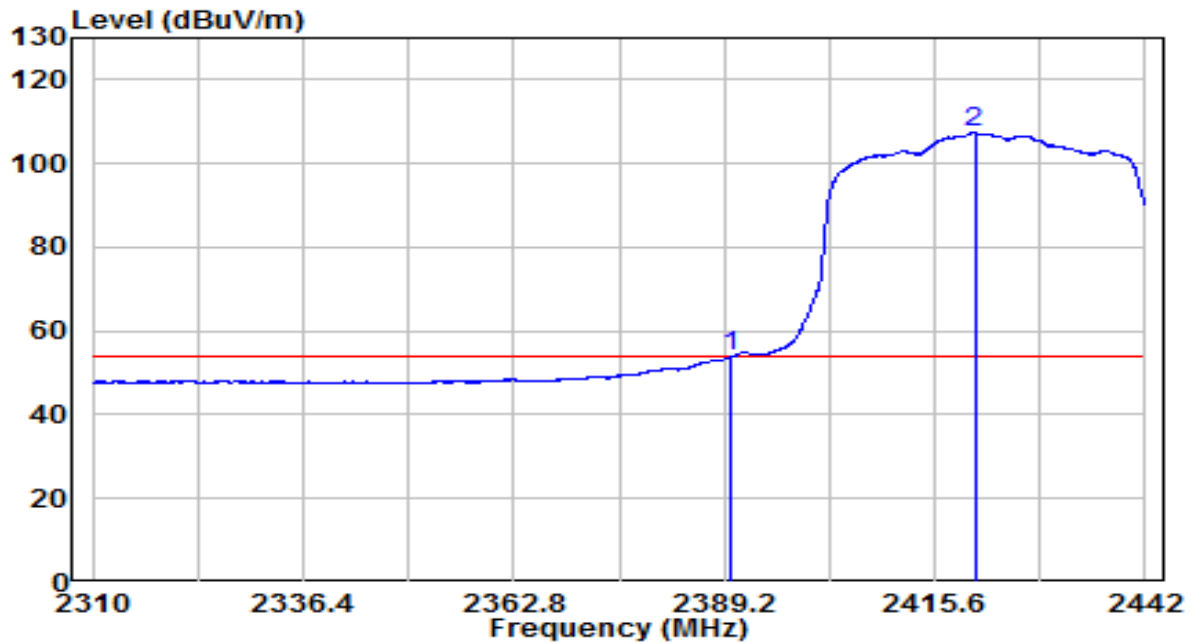


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	2390.000	21.56	32.22	53.78	-0.22	54.00	Average
2	* 2420.616	75.06	32.35	107.41	N/A	N/A	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz	Test Voltage	AC 120V/60Hz

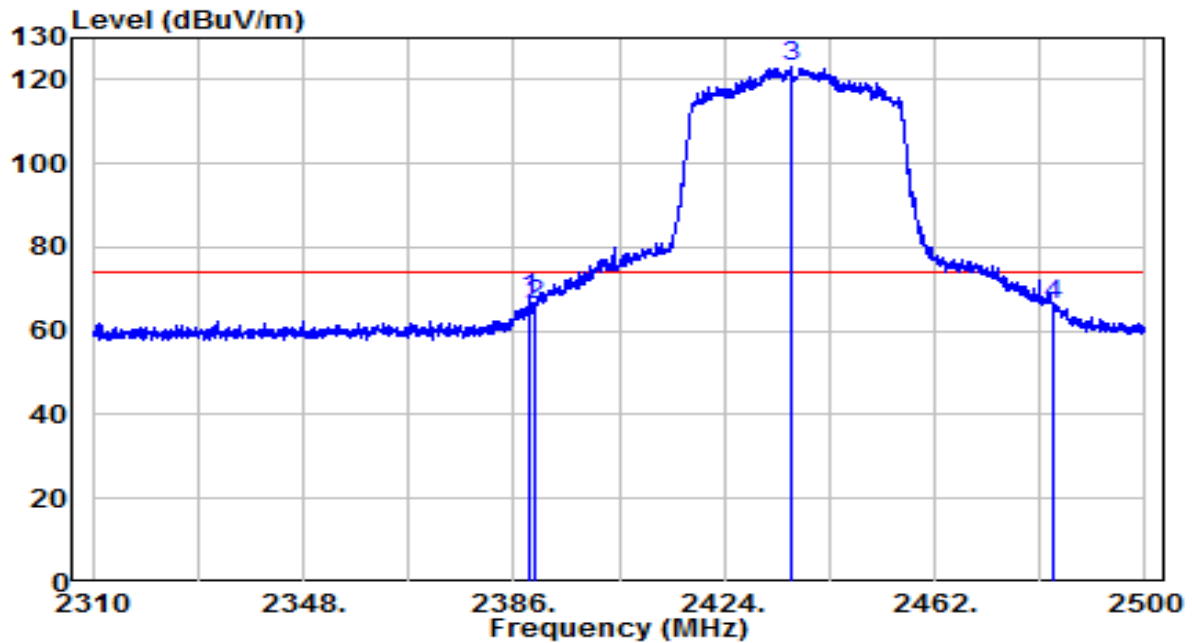


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2388.945	35.42	32.21	67.63	-6.37	74.00	Peak
2	2390.000	33.89	32.22	66.11	-7.89	74.00	Peak
3	* 2436.160	90.59	32.41	123.00	N/A	N/A	Peak
4	2483.500	33.61	32.61	66.22	-7.78	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2437MHz	Test Voltage	AC 120V/60Hz

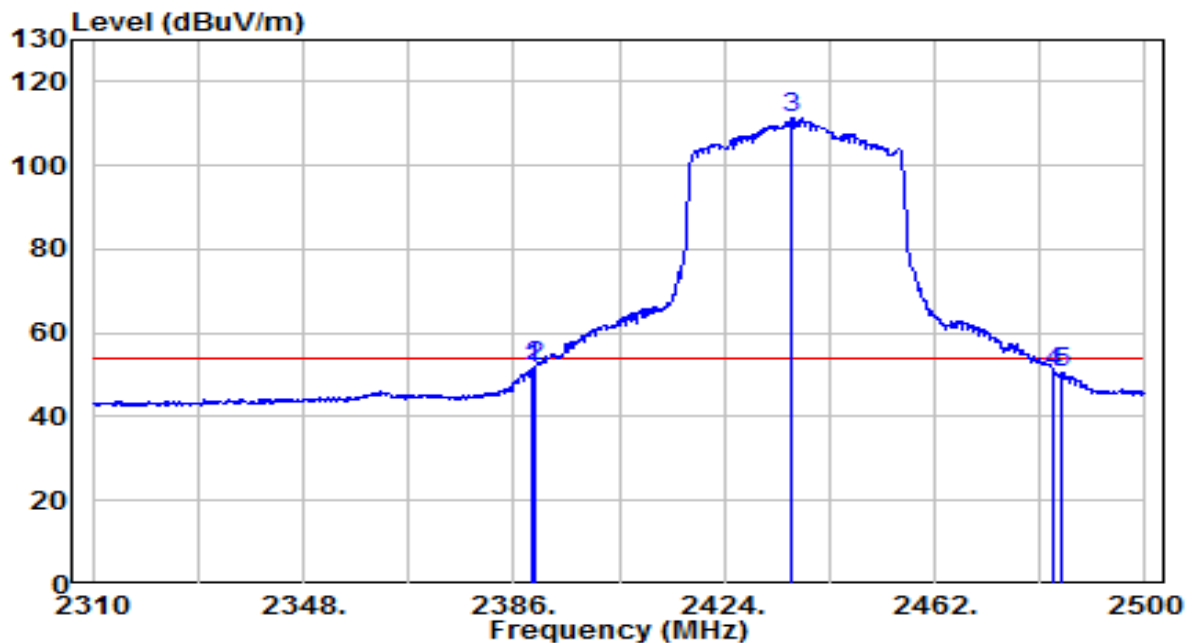


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Remark (QP/PK/AV)
1	2389.420	19.52	32.22	51.73	-2.27	54.00	Average
2	2390.000	19.76	32.22	51.98	-2.02	54.00	Average
3	* 2436.160	79.11	32.41	111.53	N/A	N/A	Average
4	2483.500	18.02	32.61	50.63	-3.37	54.00	Average
5	2485.085	17.98	32.62	50.60	-3.40	54.00	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	AC 120V/60Hz

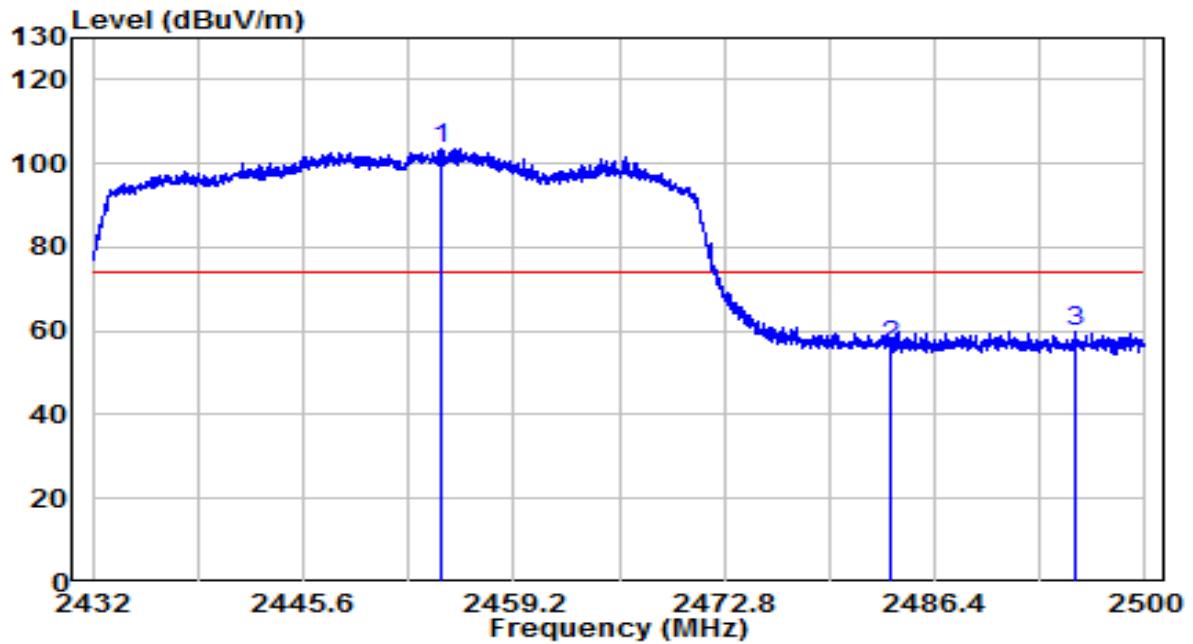


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2454.440	71.09	32.49	103.58	N/A	N/A	Peak
2		2483.500	23.77	32.61	56.38	-17.62	74.00	Peak
3		2495.546	27.11	32.66	59.77	-14.23	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Horizontal	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	AC 120V/60Hz

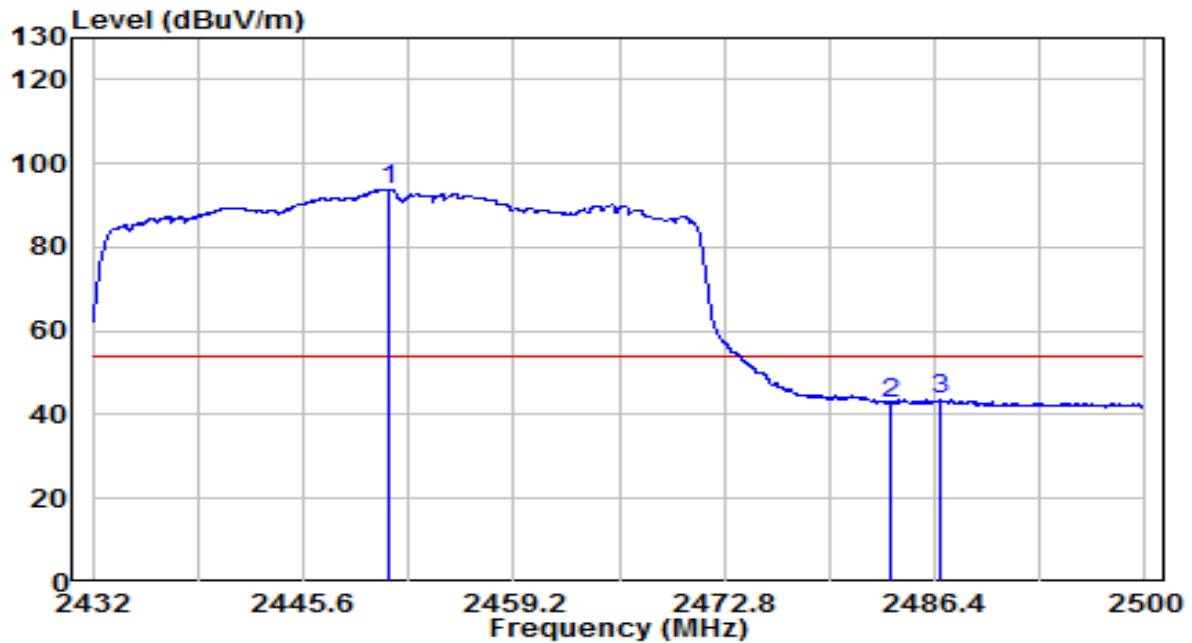


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2451.108	61.41	32.47	93.88	N/A	N/A	Average
2		2483.500	10.19	32.61	42.80	-11.20	54.00	Average
3		2486.706	10.96	32.62	43.58	-10.42	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	AC 120V/60Hz

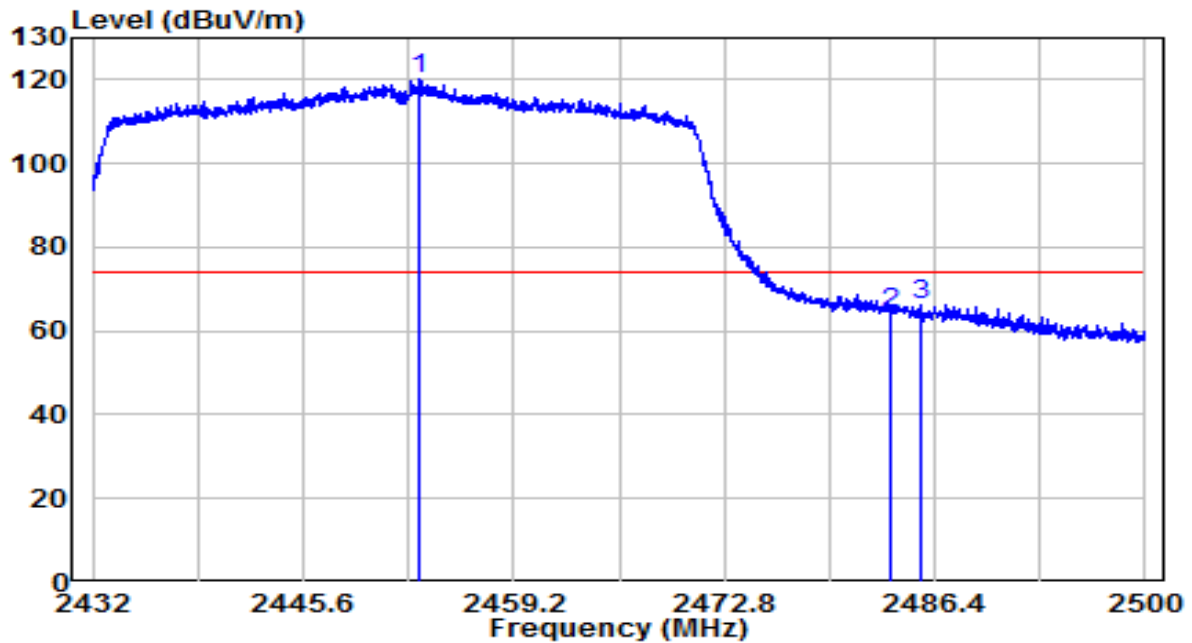


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2453.080	87.59	32.48	120.08	N/A	N/A	Peak
2		2483.500	31.65	32.61	64.26	-9.74	74.00	Peak
3		2485.448	33.59	32.62	66.21	-7.79	74.00	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2021-12-27
Factor	BBHA 9120D	Temp. / Humidity	18.2°C/32.5%
Polarity	Vertical	Site / Test Engineer	AC1 / Jay
Test Mode	Transmit by 802.11ax-HE40 at Channel 2452MHz	Test Voltage	AC 120V/60Hz

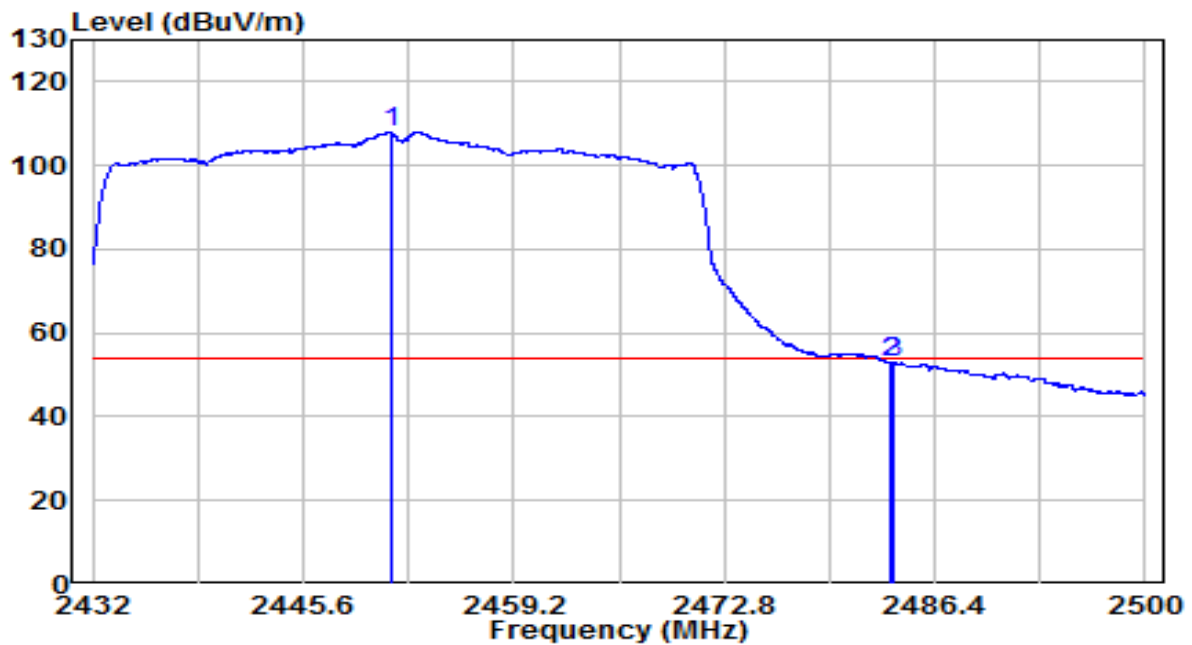

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Remark (QP/PK/AV)
1	*	2451.278	75.49	32.48	107.97	N/A	N/A	Average
2		2483.500	20.30	32.61	52.91	-1.09	54.00	Average
3		2483.714	20.46	32.61	53.07	-0.93	54.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB)
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

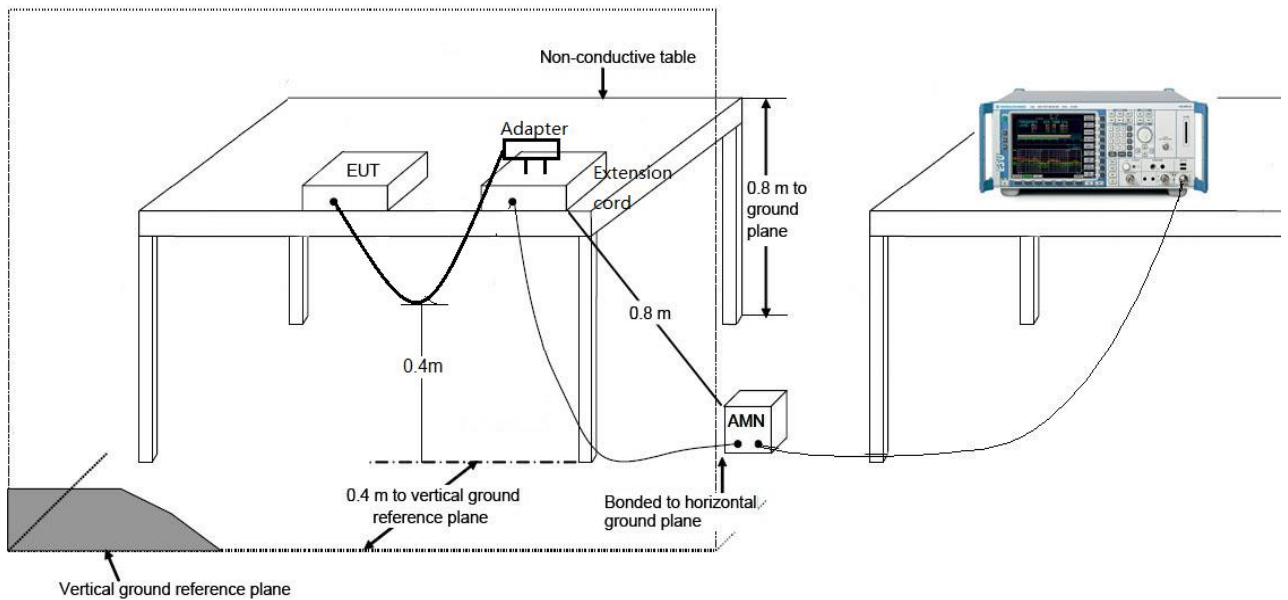

7.8.3.Test Result

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-08
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.1°C /62%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

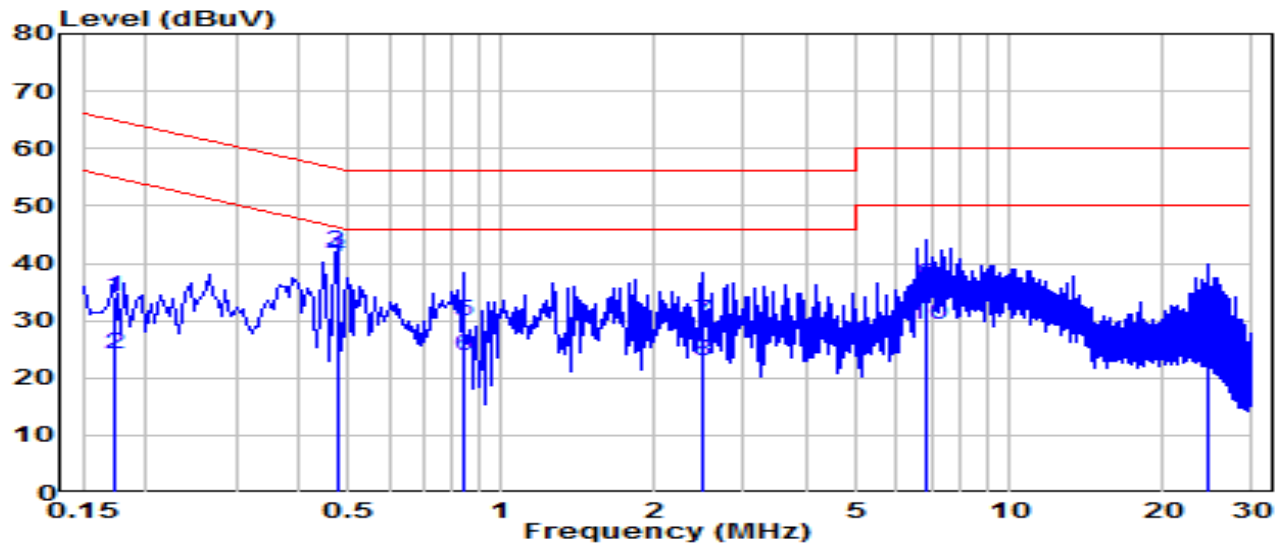


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	24.47	9.63	34.10	-30.74	64.84	QP
2	0.172	14.49	9.63	24.12	-30.72	54.84	Average
3	* 0.474	32.42	9.65	42.07	-14.38	56.44	QP
4	* 0.474	31.28	9.65	40.93	-5.52	46.44	Average
5	0.838	20.13	9.67	29.80	-26.20	56.00	QP
6	0.838	14.22	9.67	23.89	-22.11	46.00	Average
7	2.476	20.09	9.71	29.80	-26.21	56.00	QP
8	2.476	13.35	9.71	23.06	-22.94	46.00	Average
9	6.845	26.52	9.79	36.31	-23.69	60.00	QP
10	6.845	19.42	9.79	29.21	-20.79	50.00	Average
11	24.592	19.41	9.92	29.33	-30.67	60.00	QP
12	24.592	11.32	9.92	21.24	-28.76	50.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-08
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.1°C /62%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 120V/60Hz

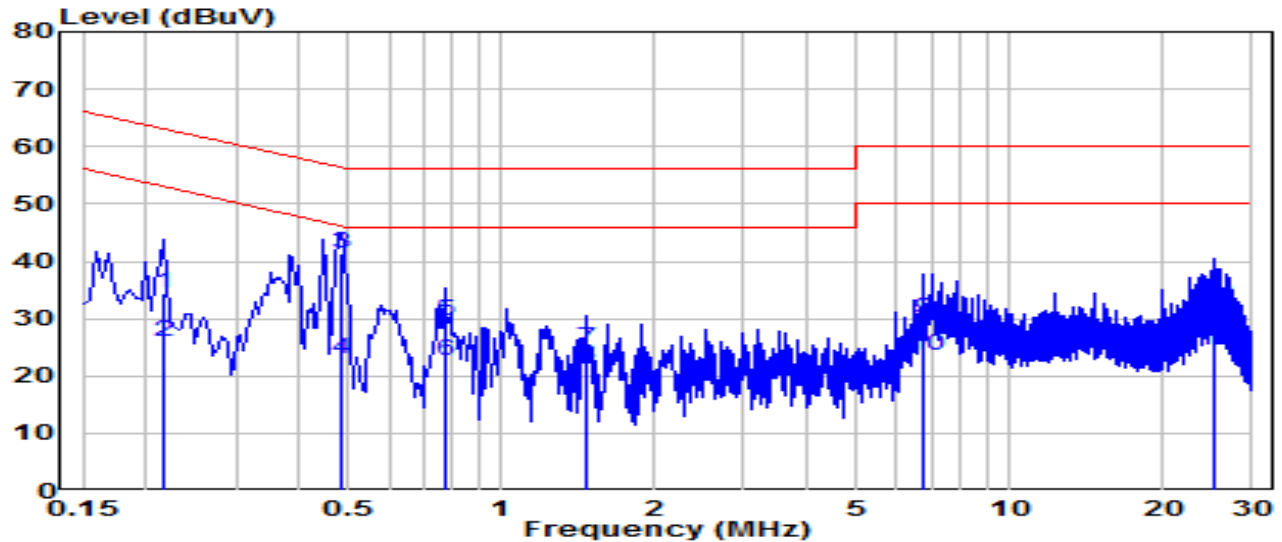


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.217	24.89	9.63	34.52	-28.39	62.91	QP
2	0.217	16.43	9.63	26.06	-26.85	52.91	Average
3	* 0.483	31.78	9.65	41.43	-14.86	56.29	QP
4	* 0.483	13.19	9.65	22.84	-23.45	46.29	Average
5	0.771	20.02	9.67	29.69	-26.31	56.00	QP
6	0.771	12.83	9.67	22.50	-23.50	46.00	Average
7	1.468	15.16	9.69	24.85	-31.15	56.00	QP
8	1.468	12.11	9.69	21.80	-24.20	46.00	Average
9	6.742	20.07	9.80	29.88	-30.12	60.00	QP
10	6.742	13.66	9.80	23.46	-26.54	50.00	Average
11	25.347	21.93	10.02	31.95	-28.05	60.00	QP
12	25.347	14.52	10.02	24.54	-25.46	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-08
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.1°C /62%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 240V/60Hz

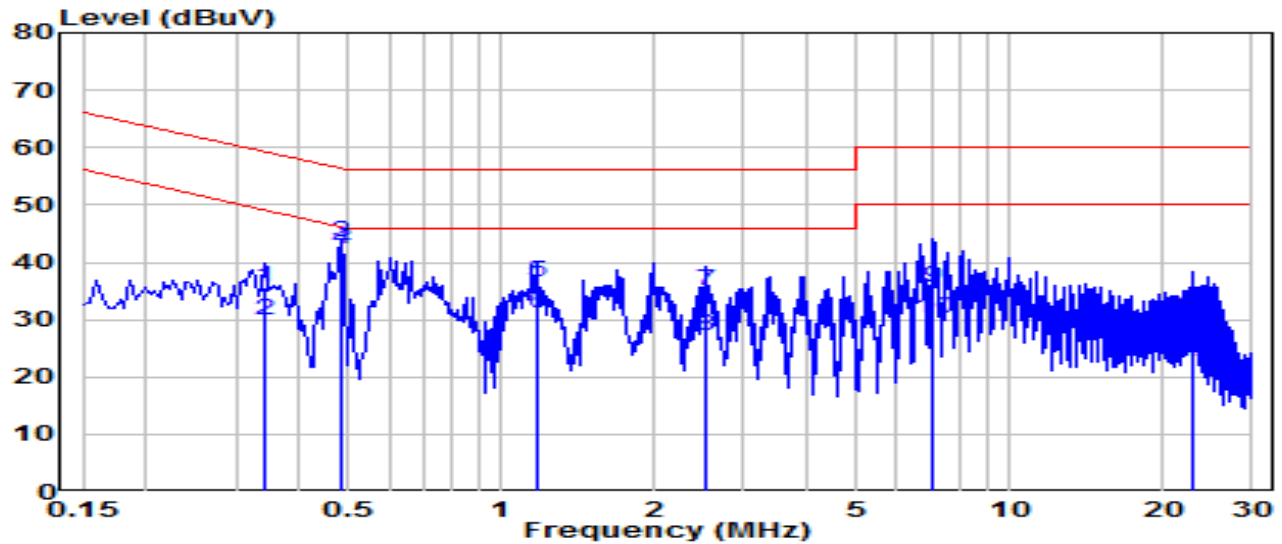


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.343	25.95	9.64	35.59	-23.52	59.12	QP
2	0.343	20.24	9.64	29.88	-19.24	49.12	Average
3	* 0.483	33.84	9.65	43.49	-12.79	56.29	QP
4	* 0.483	32.70	9.65	42.35	-3.94	46.29	Average
5	1.171	26.92	9.68	36.60	-19.40	56.00	QP
6	1.171	21.34	9.68	31.03	-14.97	46.00	Average
7	2.517	25.32	9.71	35.03	-20.97	56.00	QP
8	2.517	17.39	9.71	27.09	-18.91	46.00	Average
9	7.012	25.79	9.80	35.59	-24.41	60.00	QP
10	7.012	20.28	9.80	30.08	-19.92	50.00	Average
11	23.021	20.79	9.93	30.71	-29.29	60.00	QP
12	23.021	12.86	9.93	22.79	-27.21	50.00	Average

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Gigabit Wi-Fi 6 Router	Date of Test	2024-11-08
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.1°C /62%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0+1	Test Voltage	AC 240V/60Hz

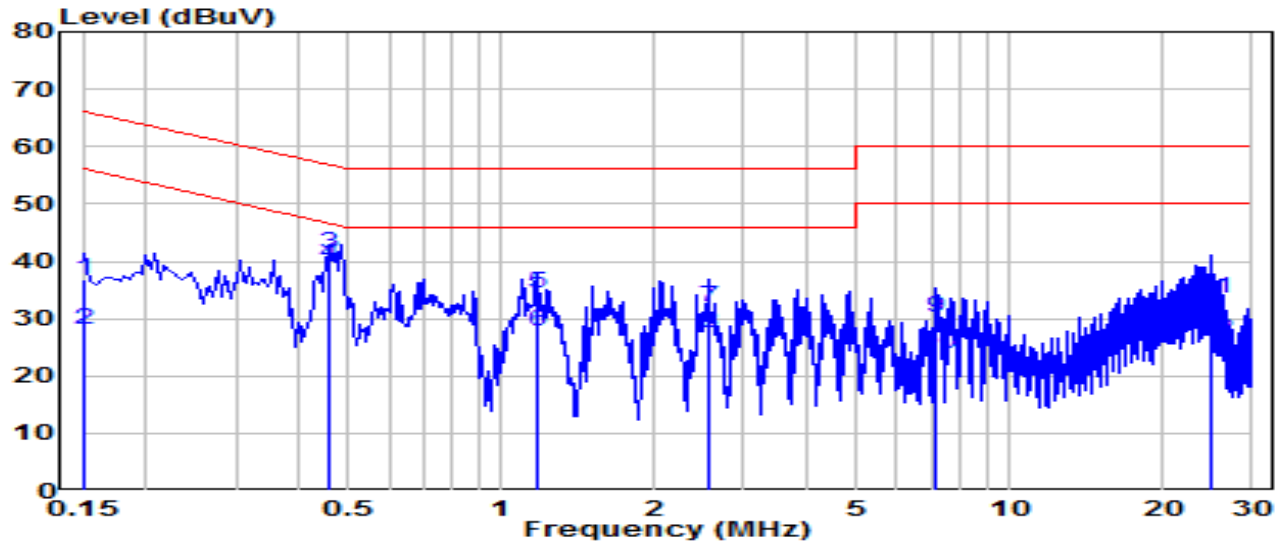

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	27.28	9.63	36.91	-29.09	66.00	QP
2	0.150	18.59	9.63	28.22	-27.78	56.00	Average
3	* 0.456	31.75	9.65	41.40	-15.36	56.77	QP
4	* 0.456	30.03	9.65	39.68	-7.09	46.77	Average
5	1.171	24.85	9.69	34.54	-21.46	56.00	QP
6	1.171	18.05	9.69	27.74	-18.26	46.00	Average
7	2.548	22.21	9.72	31.93	-24.07	56.00	QP
8	2.548	17.83	9.72	27.55	-18.45	46.00	Average
9	7.192	20.44	9.82	30.25	-29.75	60.00	QP
10	7.192	14.05	9.82	23.86	-26.14	50.00	Average
11	24.992	23.36	10.01	33.38	-26.62	60.00	QP
12	24.992	16.17	10.01	26.18	-23.82	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2411TW0101-TT” file.

Appendix B : External Photograph

Refer to “2411TW0101-TE” file.

Appendix C : Internal Photograph

Refer to “2411TW0101-TI” file.

_____ The End _____