



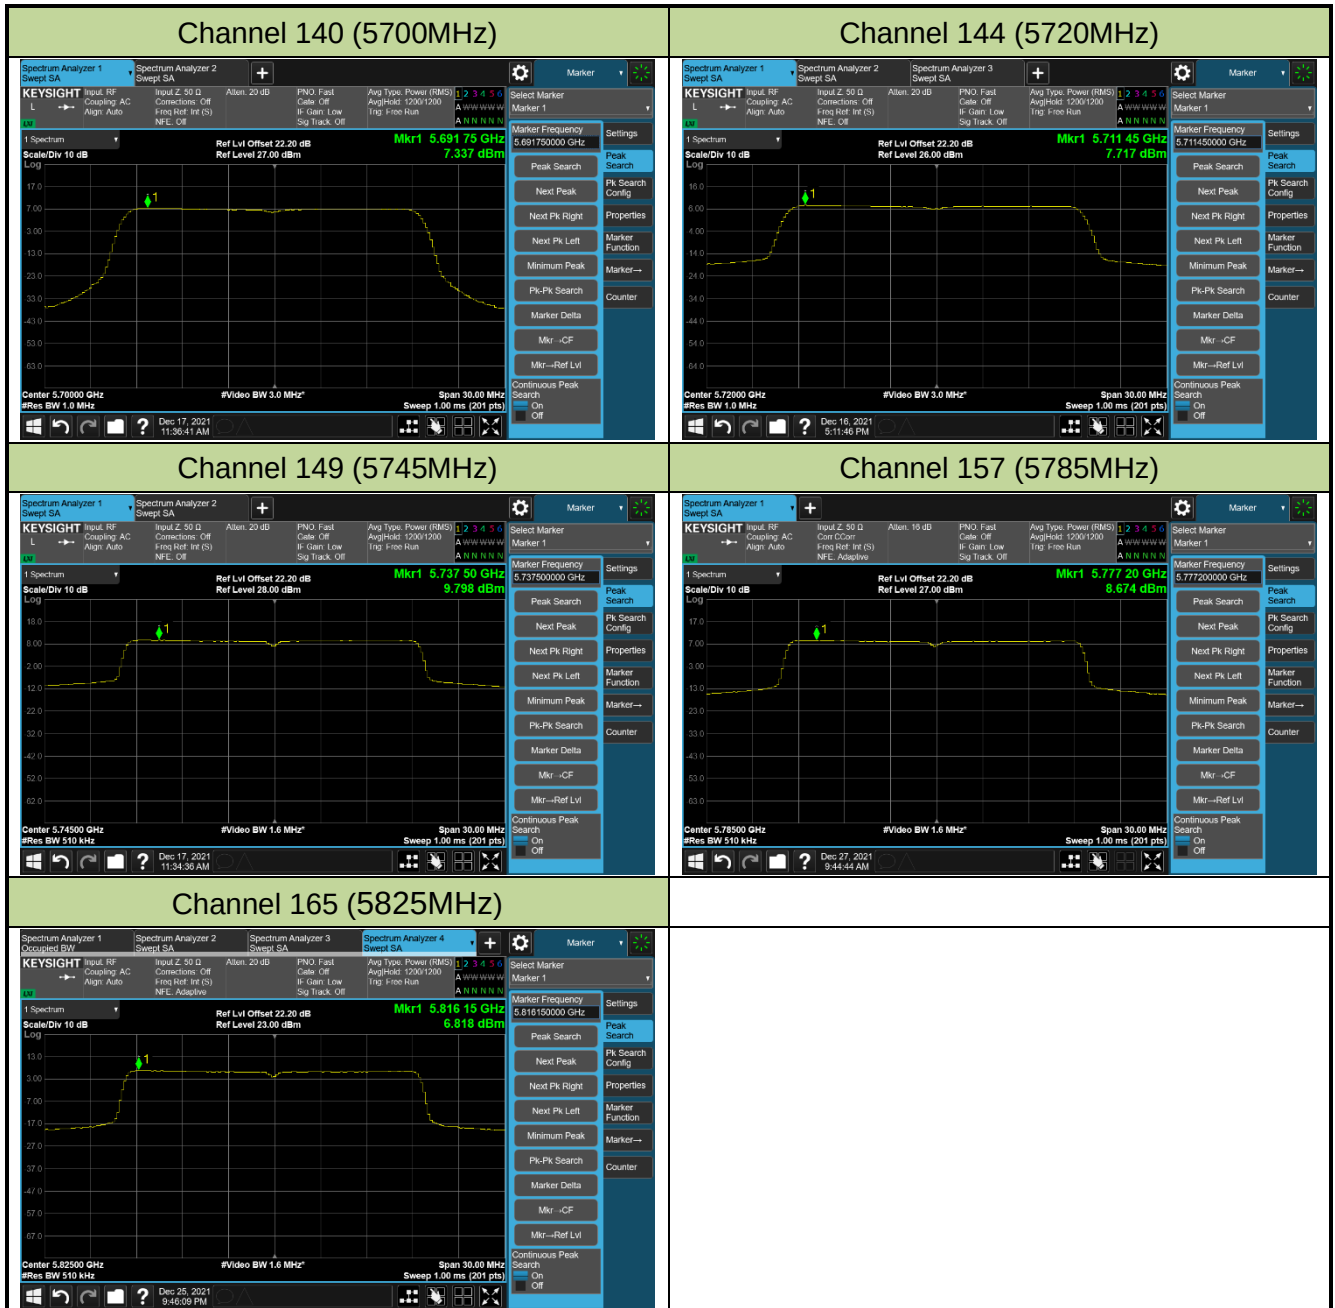

## 802.11ax-HE40 Power Spectral Density - Ant 1


## Channel 38 (5190MHz)

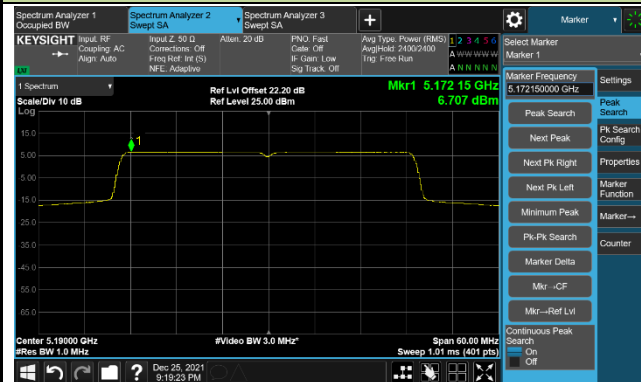

## Channel 46 (5230MHz)




## Channel 54 (5270MHz)

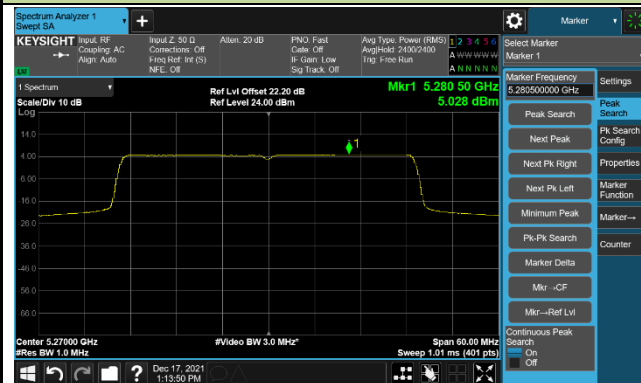

## Channel 62 (5310MHz)



## Channel 102 (5510MHz)

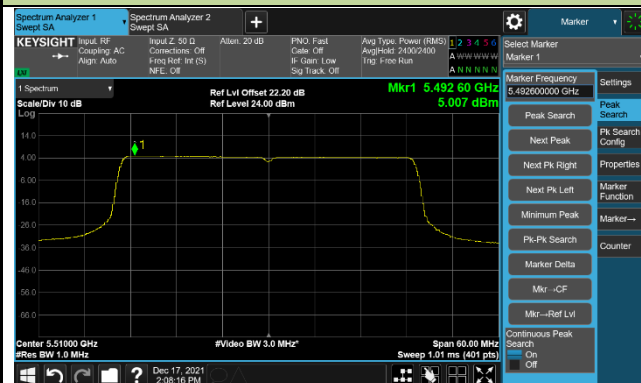

## Channel 110 (5550MHz)




## Channel 134 (5670MHz)




## Channel 142 (5710MHz)



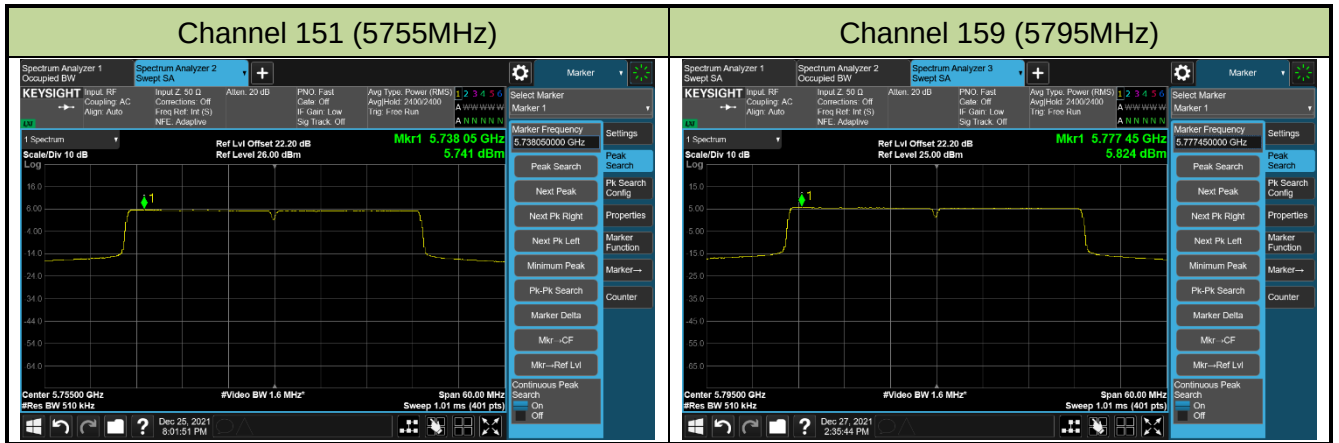


## 802.11ax-HE80 Power Spectral Density - Ant 1


## Channel 42 (5210MHz)

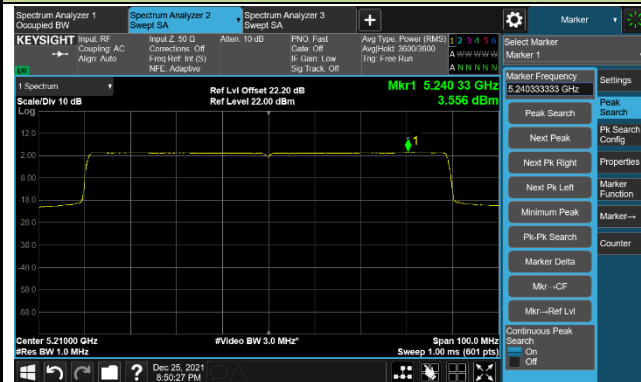


## Channel 58 (5290MHz)

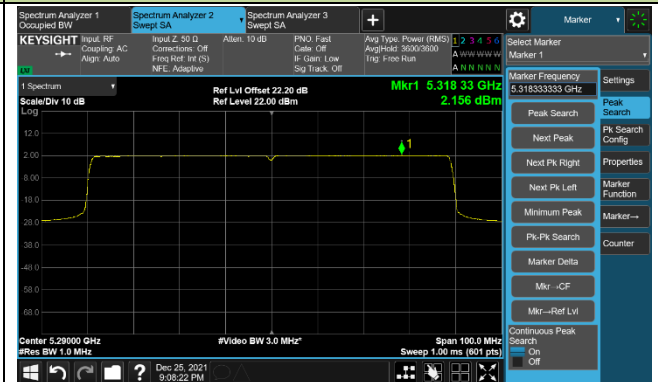


## Channel 106 (5530MHz)

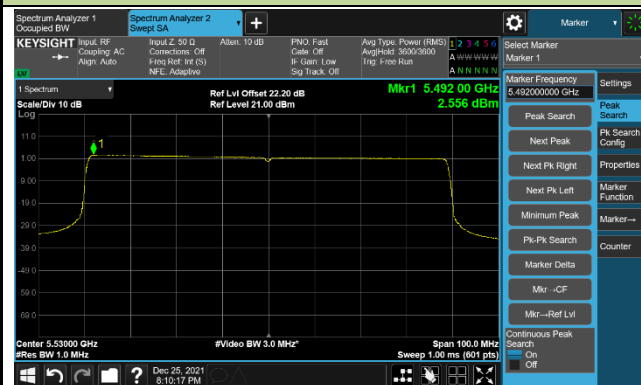


## Channel 122 (5610MHz)

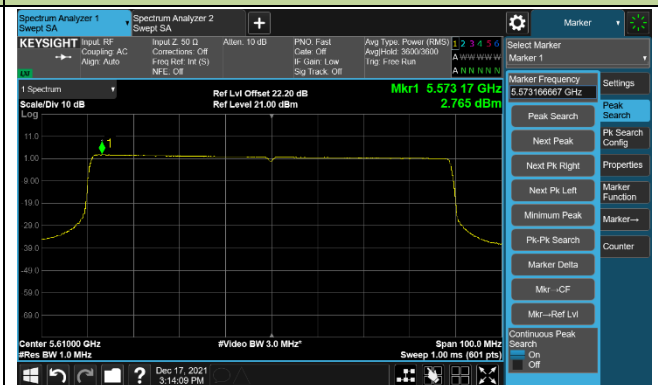

## Channel 138 (5690MHz)

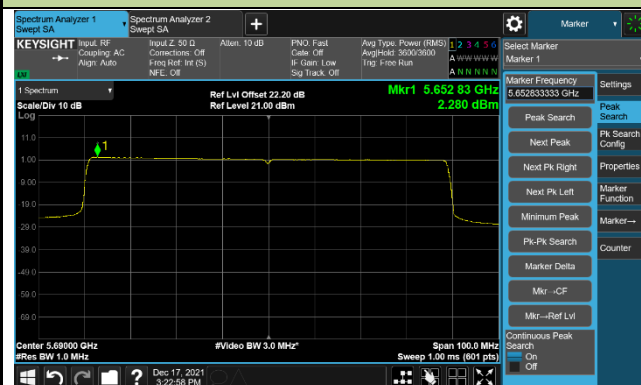


## Channel 155 (5775MHz)

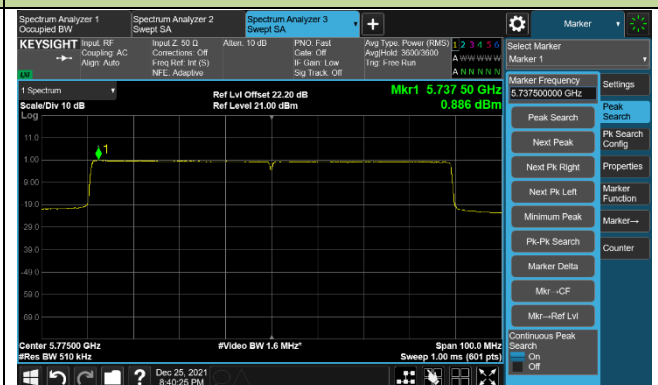


## 802.11ax-HE160 Power Spectral Density - Ant 1

## Channel 50 (5250MHz)

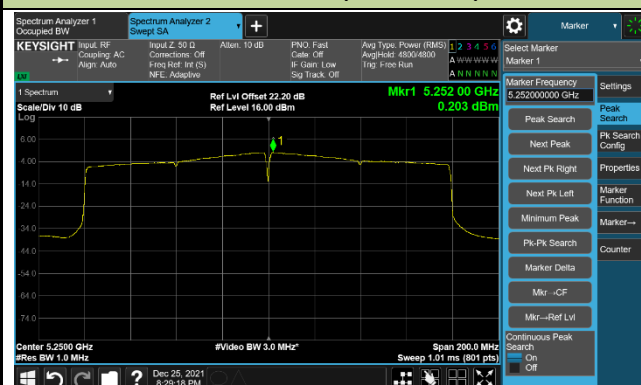

## Channel 114 (5570MHz)

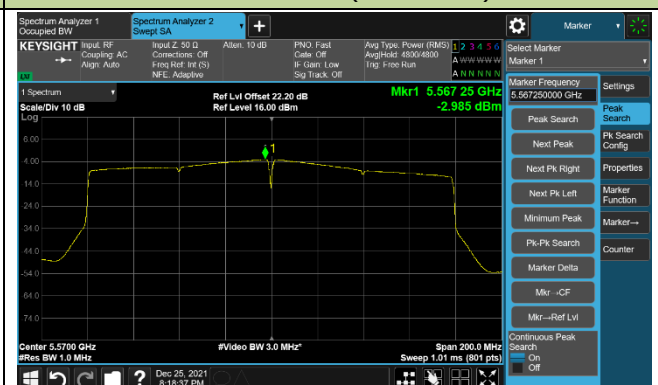

## **7.7. Frequency Stability Measurement**

### **7.7.1. Test Limit**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### **7.7.2. Test Limit**

#### **Frequency Stability Under Temperature Variations:**


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 7.7.3. Test Setup

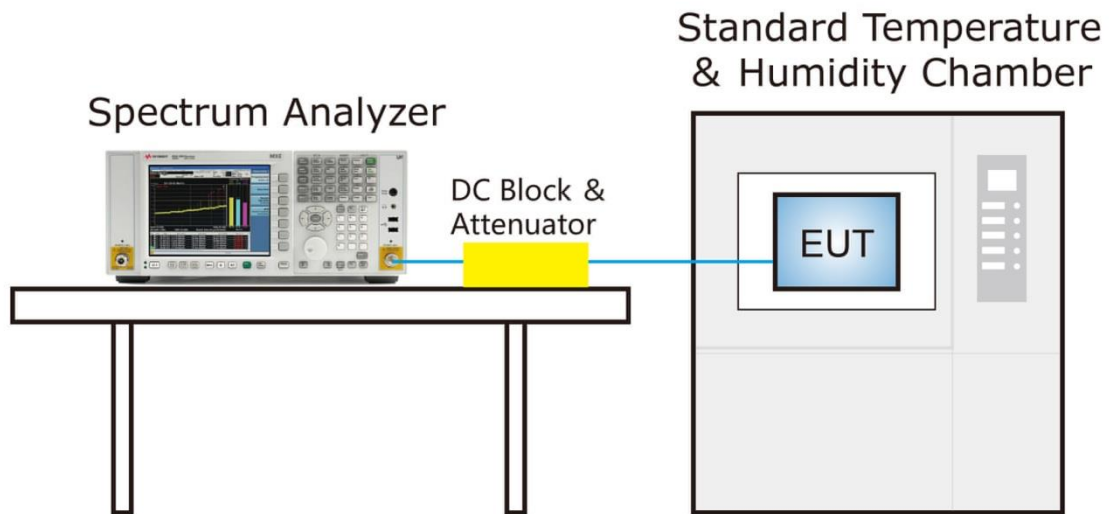

### 7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

## 7.8. Radiated Spurious Emission Measurement

### 7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

### 7.8.3. Test Setting

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |
| >1000 MHz     | 1 MHz         |

**Quasi-Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Peak Measurements above 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


**Average Measurements above 1GHz (Method VB)**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize




#### 7.8.4. Test Setup

##### Below 1GHz Test Setup:

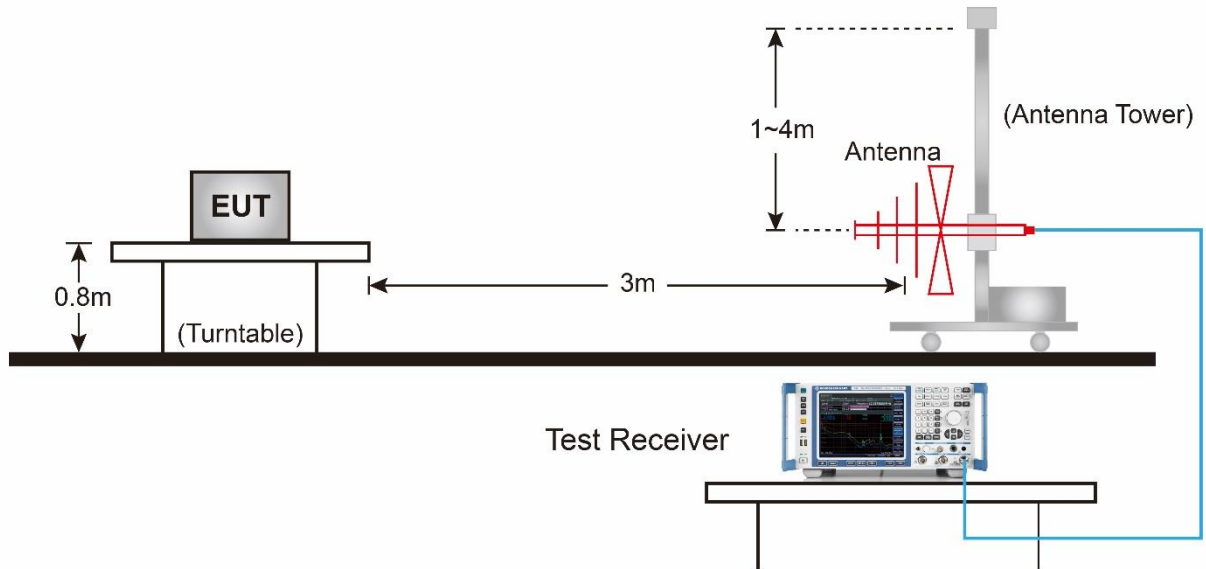


##### Above 1GHz Test Setup:

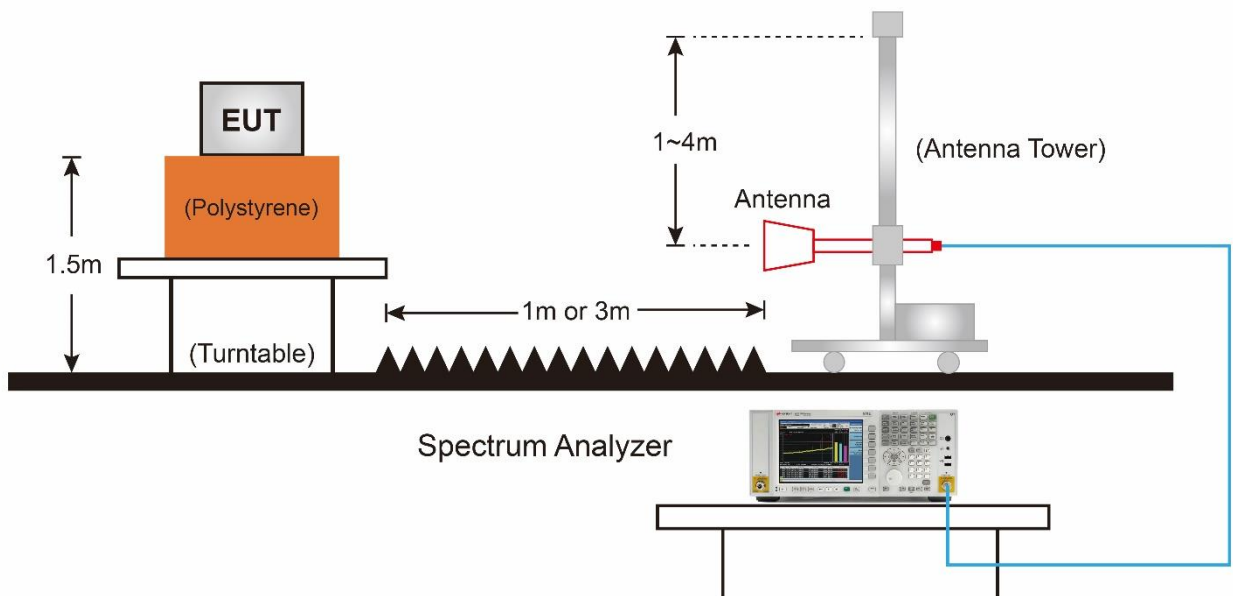

### 7.8.5. Test Result

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router       | Date of Test         | 2024-11-11   |
| Factor    | VULB 9162                           | Temp. / Humidity     | 24°C /69%    |
| Polarity  | Horizontal                          | Site / Test Engineer | AC1 / Dio    |
| Test Mode | 802.11ac-VHT20_TX_Band1_CH 40_ANT 0 | Test Voltage         | AC 120V/60Hz |

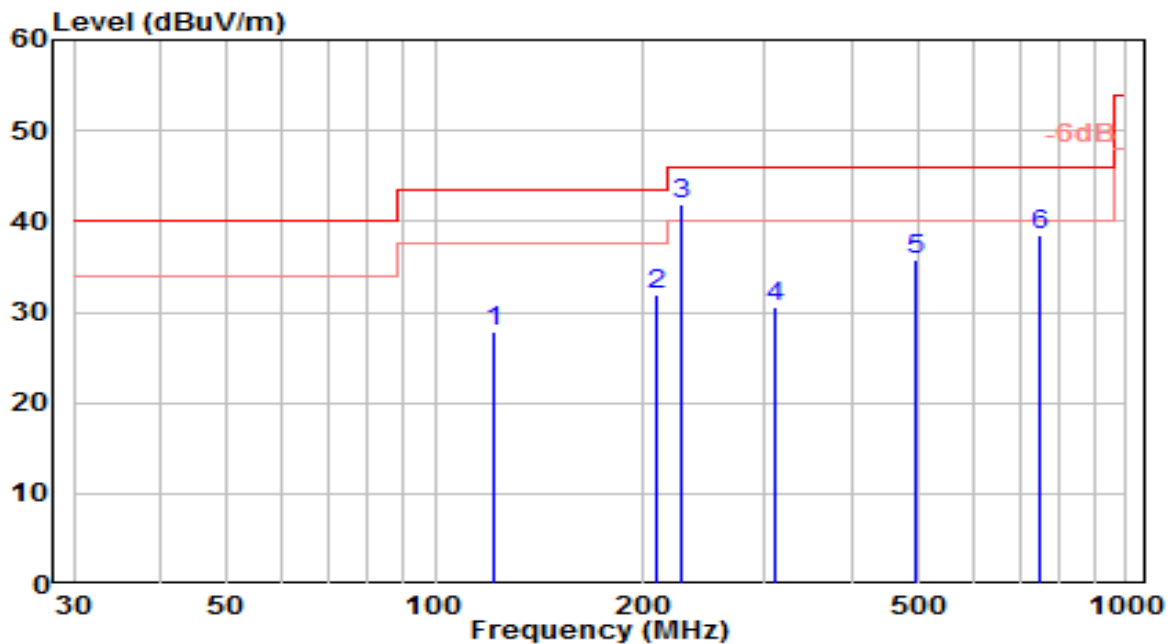


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 121.720         | 11.07          | 16.71      | 27.78                | -15.72      | 43.50          | 200         | 358         | QP                |
| 2  | 209.064         | 13.91          | 17.92      | 31.83                | -11.67      | 43.50          | 150         | 28          | QP                |
| 3  | * 226.704       | 22.99          | 18.95      | 41.94                | -4.06       | 46.00          | 100         | 0           | QP                |
| 4  | 309.142         | 9.54           | 21.10      | 30.65                | -15.35      | 46.00          | 100         | 0           | QP                |
| 5  | 497.418         | 10.62          | 25.23      | 35.84                | -10.16      | 46.00          | 200         | 18          | QP                |
| 6  | 751.378         | 9.12           | 29.41      | 38.52                | -7.48       | 46.00          | 100         | 104         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

|           |                                     |                      |              |
|-----------|-------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router       | Date of Test         | 2024-11-11   |
| Factor    | VULB 9162                           | Temp. / Humidity     | 24°C /69%    |
| Polarity  | Vertical                            | Site / Test Engineer | AC1 / Dio    |
| Test Mode | 802.11ac-VHT20_TX_Band1_CH 40_ANT 0 | Test Voltage         | AC 120V/60Hz |

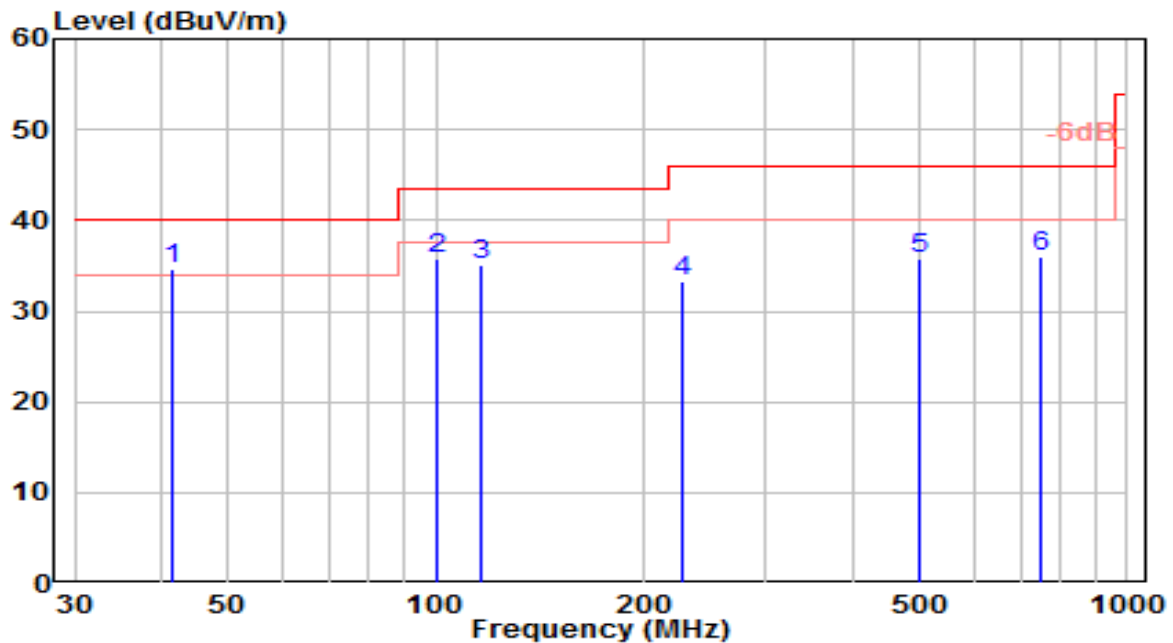


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 41.385          | 14.58          | 20.02      | 34.60                | -5.40       | 40.00          | 100         | 215         | QP                |
| 2  |   | 100.506         | 17.26          | 18.49      | 35.75                | -7.75       | 43.50          | 100         | 84          | QP                |
| 3  |   | 115.848         | 17.47          | 17.63      | 35.10                | -8.40       | 43.50          | 100         | 2           | QP                |
| 4  |   | 226.976         | 14.31          | 18.97      | 33.28                | -12.72      | 46.00          | 200         | 256         | QP                |
| 5  |   | 499.101         | 10.41          | 25.27      | 35.68                | -10.32      | 46.00          | 150         | 326         | QP                |
| 6  |   | 749.556         | 6.63           | 29.39      | 36.02                | -9.98       | 46.00          | 150         | 240         | QP                |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5180 MHz | Test Voltage         | AC 120V/60Hz |

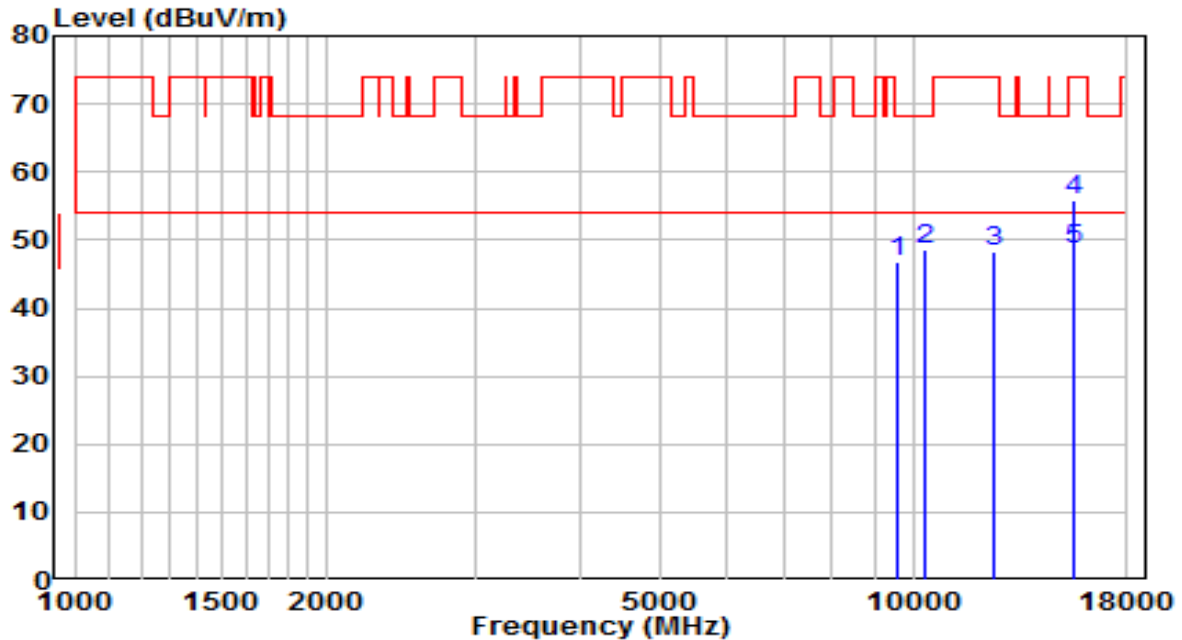


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9610.500        | 30.80          | 15.91      | 46.71                | -21.49      | 68.20          | Peak              |
| 2  | 10358.500       | 30.61          | 18.00      | 48.61                | -19.59      | 68.20          | Peak              |
| 3  | 12492.000       | 29.93          | 18.41      | 48.34                | -25.66      | 74.00          | Peak              |
| 4  | 15543.500       | 34.52          | 21.24      | 55.76                | -18.24      | 74.00          | Peak              |
| 5  | * 15543.500     | 27.27          | 21.24      | 48.51                | -5.49       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5180 MHz | Test Voltage         | AC 120V/60Hz |

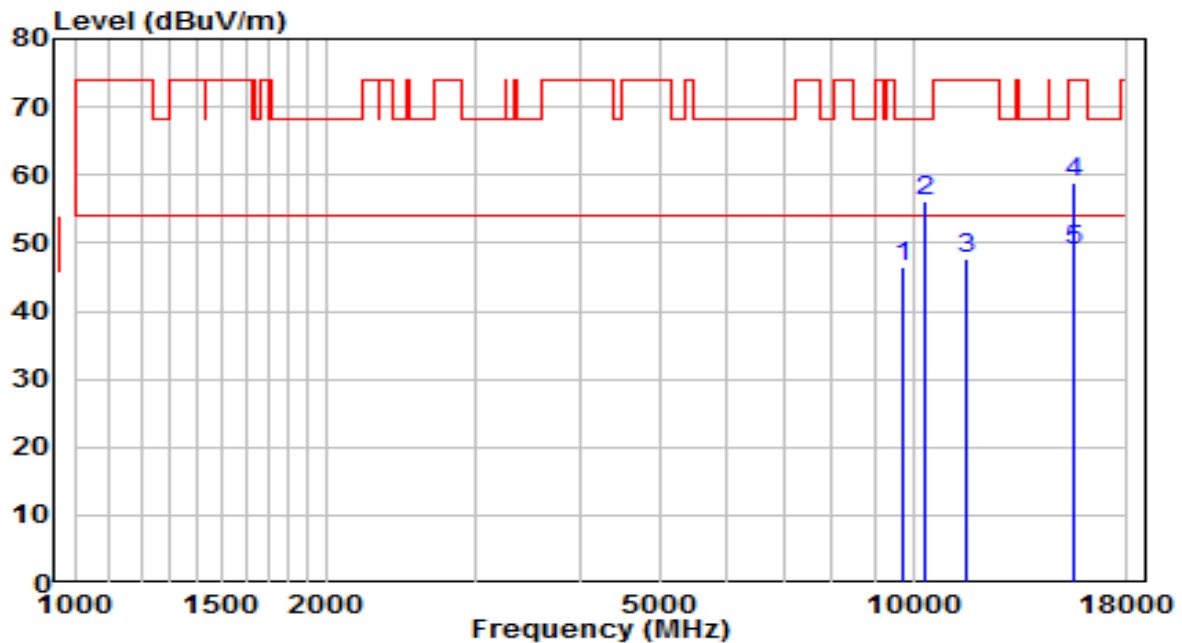


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9738.000        | 30.48          | 16.12      | 46.60                | -21.60      | 68.20          | Peak              |
| 2  | 10358.500       | 38.14          | 18.00      | 56.14                | -12.06      | 68.20          | Peak              |
| 3  | 11591.000       | 27.98          | 19.84      | 47.82                | -26.18      | 74.00          | Peak              |
| 4  | 15543.500       | 37.55          | 21.24      | 58.79                | -15.21      | 74.00          | Peak              |
| 5  | * 15543.500     | 27.64          | 21.24      | 48.88                | -5.12       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5220 MHz | Test Voltage         | AC 120V/60Hz |

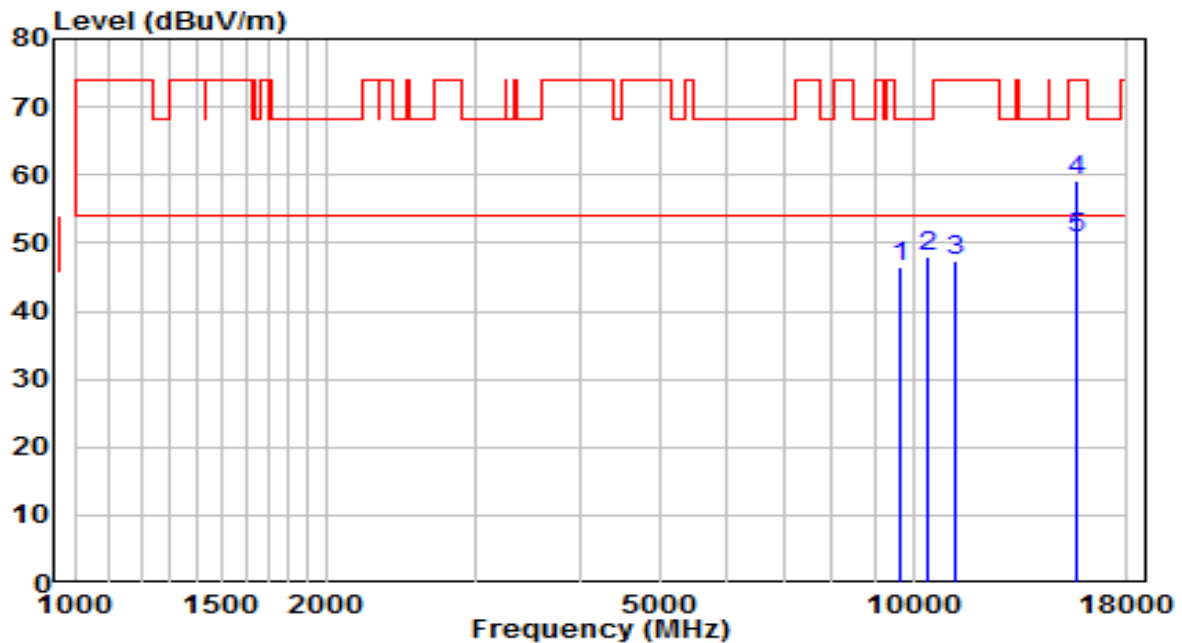


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9653.000        | 30.53          | 15.98      | 46.50                | -21.70      | 68.20          | Peak              |
| 2  | 10443.500       | 29.67          | 18.34      | 48.01                | -20.19      | 68.20          | Peak              |
| 3  | 11225.500       | 27.69          | 19.63      | 47.32                | -26.68      | 74.00          | Peak              |
| 4  | 15662.500       | 38.16          | 20.95      | 59.11                | -14.89      | 74.00          | Peak              |
| 5  | * 15662.500     | 29.76          | 20.95      | 50.71                | -3.29       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5220 MHz | Test Voltage         | AC 120V/60Hz |

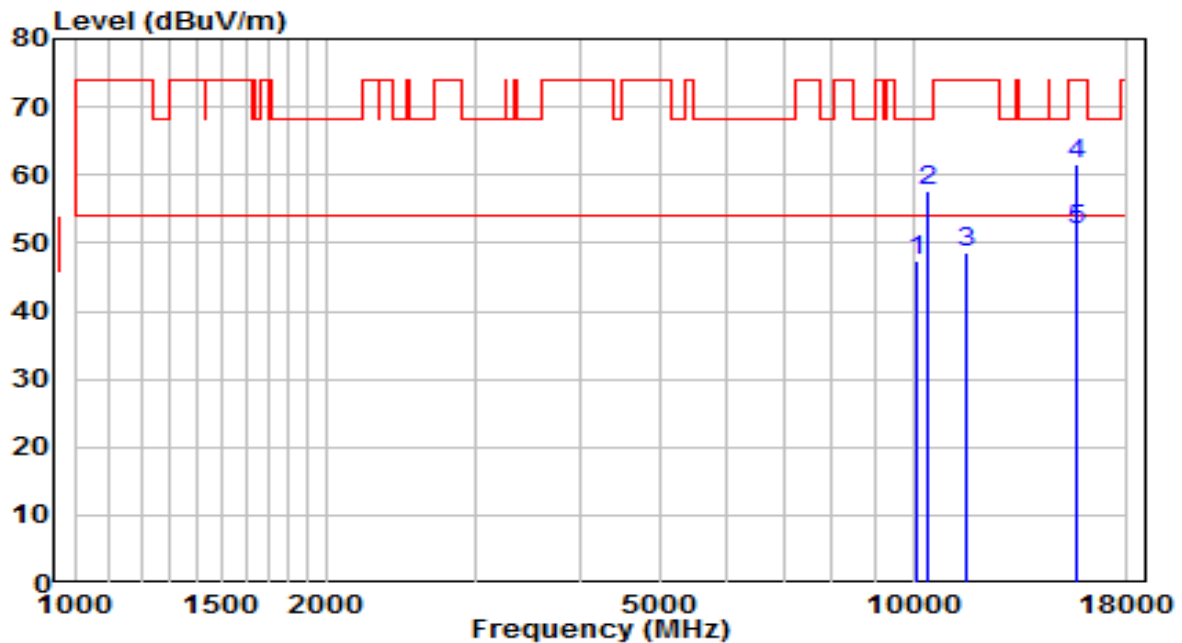


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10129.000       | 30.24          | 17.08      | 47.32                | -20.88      | 68.20          | Peak              |
| 2  | 10443.500       | 39.17          | 18.34      | 57.51                | -10.69      | 68.20          | Peak              |
| 3  | 11565.500       | 28.72          | 19.90      | 48.62                | -25.38      | 74.00          | Peak              |
| 4  | 15654.000       | 40.61          | 20.97      | 61.58                | -12.42      | 74.00          | Peak              |
| 5  | * 15654.000     | 31.06          | 20.97      | 52.03                | -1.97       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5240 MHz | Test Voltage         | AC 120V/60Hz |

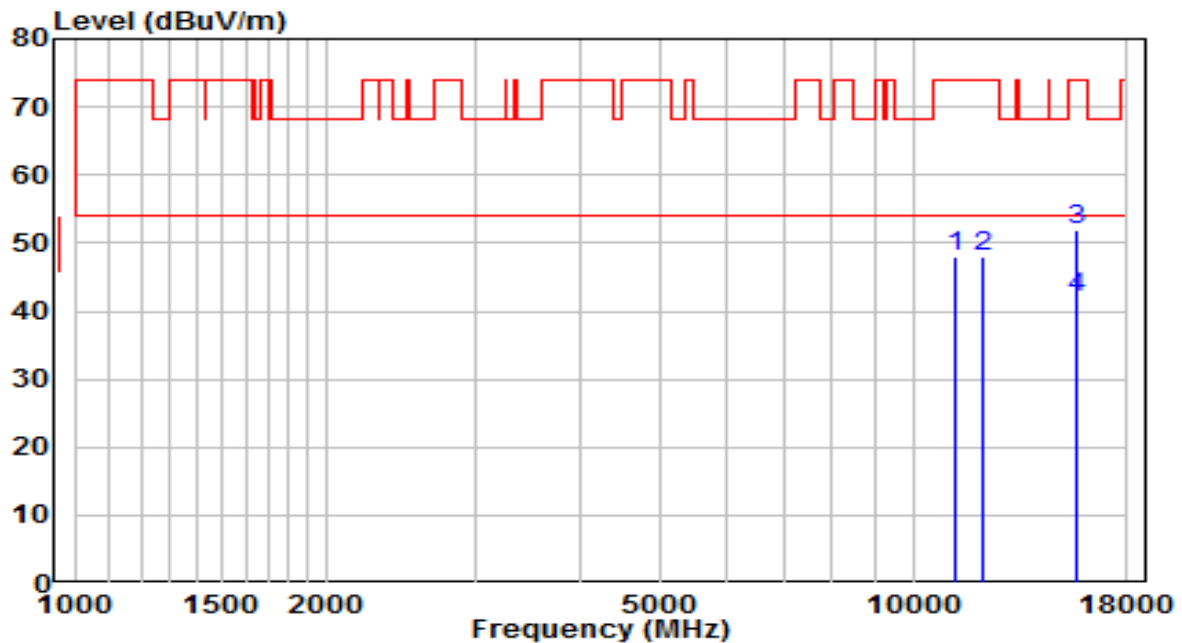


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 11242.500       | 28.37          | 19.65      | 48.02                | -25.98      | 74.00          | Peak              |
| 2  | 12118.000       | 29.32          | 18.80      | 48.12                | -25.88      | 74.00          | Peak              |
| 3  | 15722.000       | 31.14          | 20.80      | 51.94                | -22.06      | 74.00          | Peak              |
| 4  | * 15722.000     | 21.24          | 20.80      | 42.04                | -11.96      | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5240 MHz | Test Voltage         | AC 120V/60Hz |

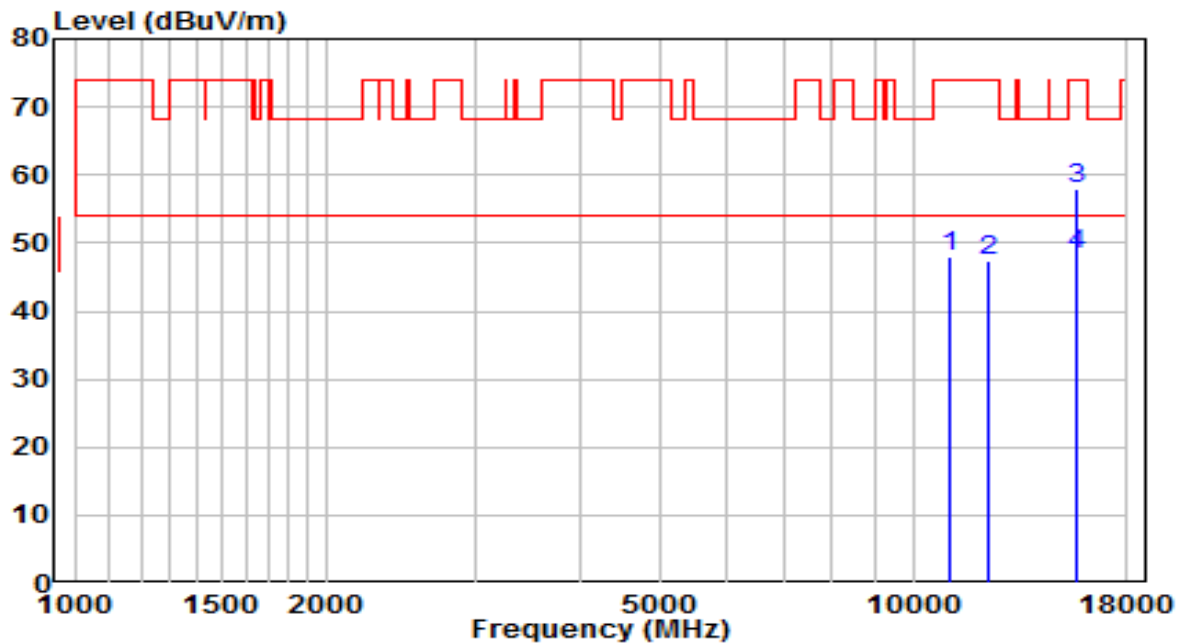


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 11047.000       | 28.60          | 19.35      | 47.95                | -26.05      | 74.00          | Peak              |
| 2  | 12271.000       | 28.89          | 18.64      | 47.53                | -26.47      | 74.00          | Peak              |
| 3  | 15722.000       | 37.15          | 20.80      | 57.95                | -16.05      | 74.00          | Peak              |
| 4  | * 15722.000     | 27.46          | 20.80      | 48.26                | -5.74       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5260 MHz | Test Voltage         | AC 120V/60Hz |

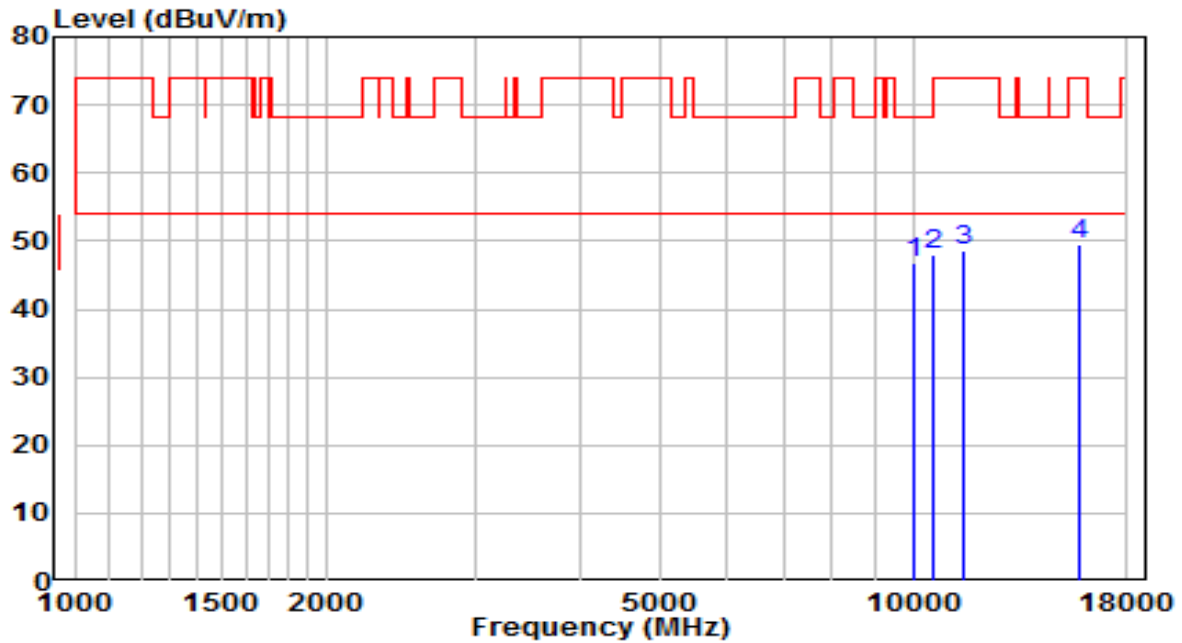


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10035.500       | 30.03          | 16.70      | 46.73                | -21.47      | 68.20          | Peak              |
| 2  | * 10596.500     | 29.40          | 18.71      | 48.11                | -20.09      | 68.20          | Peak              |
| 3  | 11523.000       | 28.74          | 20.00      | 48.74                | -25.26      | 74.00          | Peak              |
| 4  | 15798.500       | 28.75          | 20.61      | 49.36                | -24.64      | 74.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5260 MHz | Test Voltage         | AC 120V/60Hz |

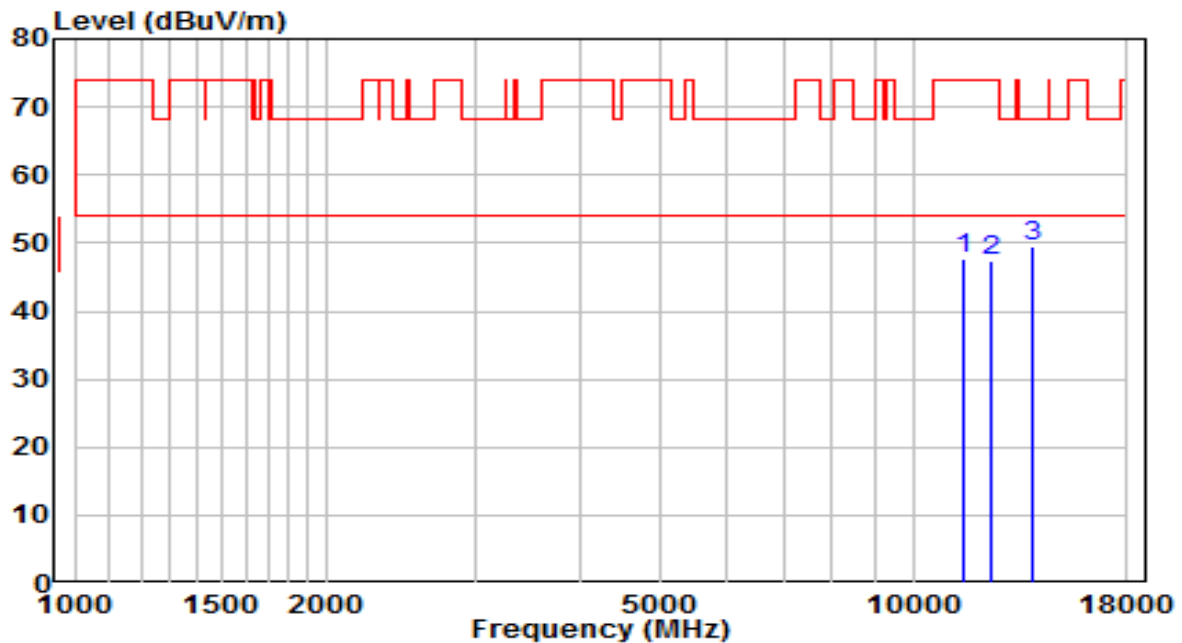


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 11523.000       | 27.56          | 20.00      | 47.55                | -26.45      | 74.00          | Peak              |
| 2  | 12398.500       | 28.95          | 18.51      | 47.46                | -26.54      | 74.00          | Peak              |
| 3  | * 13877.500     | 27.08          | 22.28      | 49.36                | -18.84      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5300 MHz | Test Voltage         | AC 120V/60Hz |

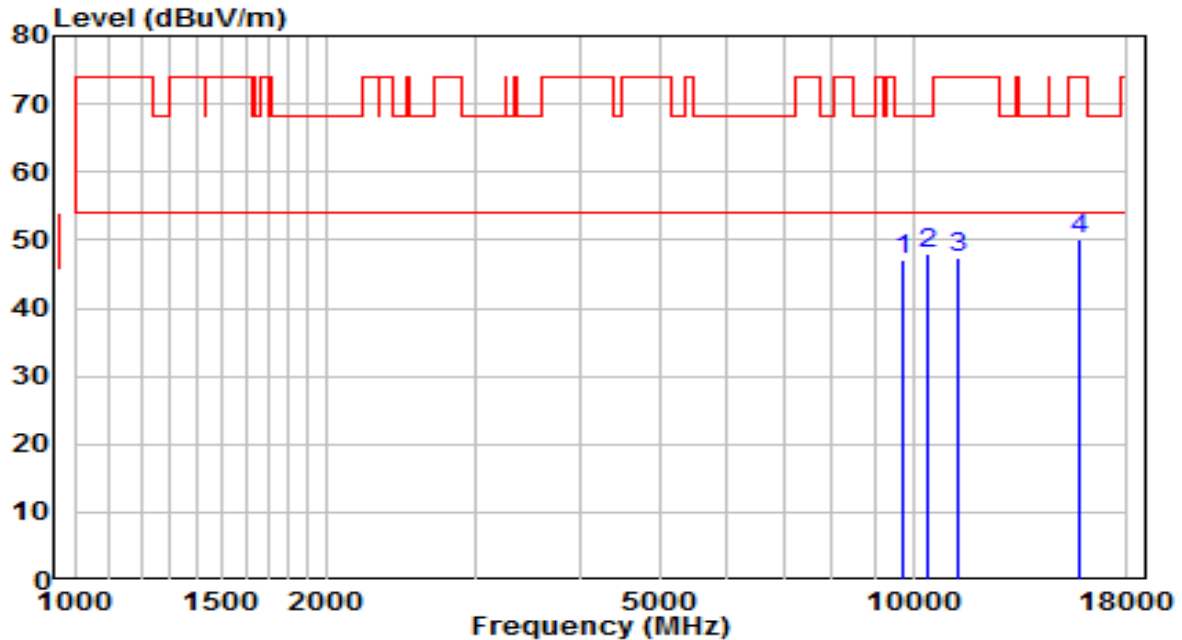


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9729.500        | 30.92          | 16.11      | 47.03                | -21.17      | 68.20          | Peak              |
| 2  | * 10375.500     | 29.96          | 18.07      | 48.03                | -20.17      | 68.20          | Peak              |
| 3  | 11285.000       | 27.78          | 19.72      | 47.50                | -26.50      | 74.00          | Peak              |
| 4  | 15798.500       | 29.60          | 20.61      | 50.21                | -23.79      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5300 MHz | Test Voltage         | AC 120V/60Hz |

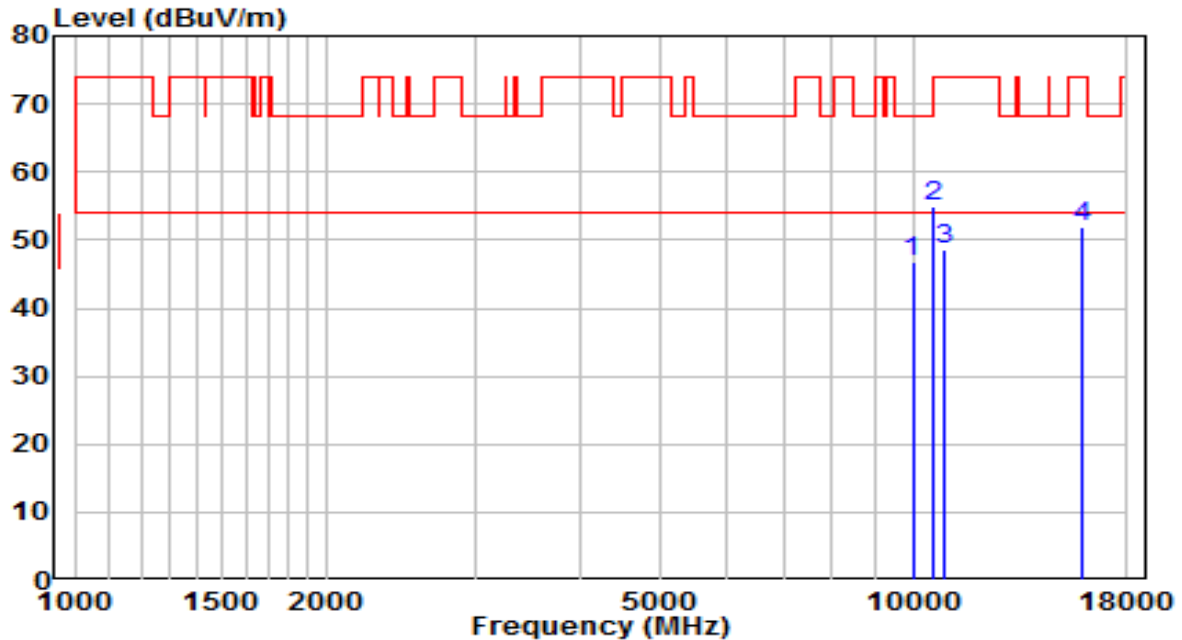


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9984.500        | 30.40          | 16.53      | 46.93                | -21.27      | 68.20          | Peak              |
| 2  | * 10605.000     | 36.16          | 18.72      | 54.88                | -19.12      | 74.00          | Peak              |
| 3  | 10911.000       | 29.40          | 19.15      | 48.55                | -25.45      | 74.00          | Peak              |
| 4  | 15900.500       | 31.57          | 20.36      | 51.93                | -22.07      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5320 MHz | Test Voltage         | AC 120V/60Hz |

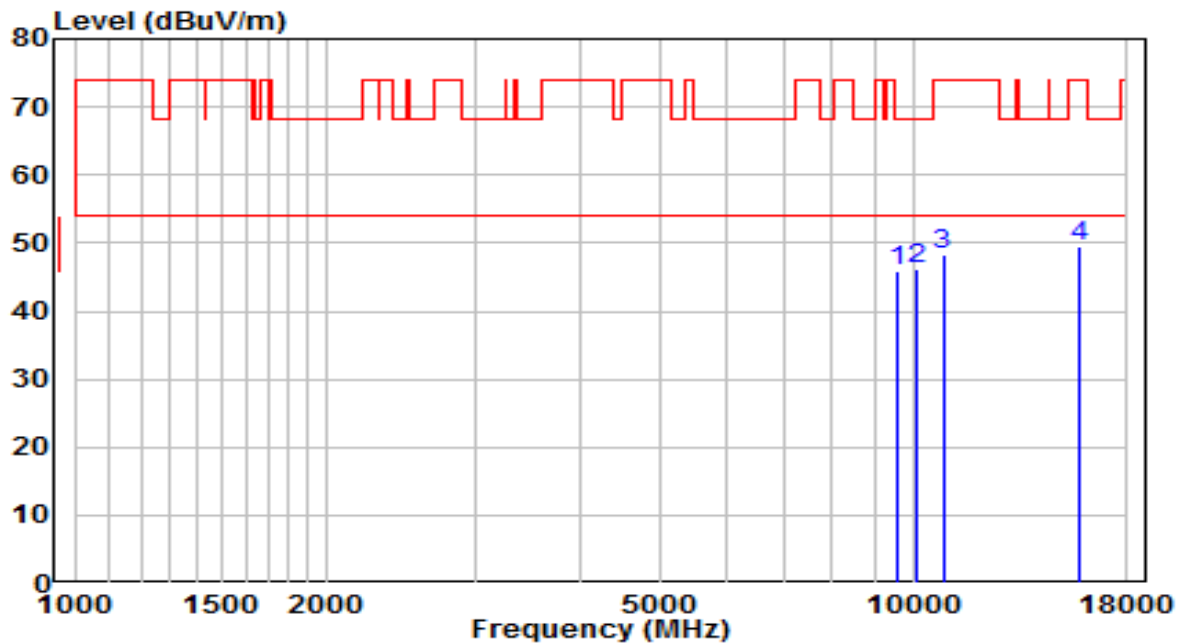


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9593.500        | 30.07          | 15.88      | 45.95                | -22.25      | 68.20          | Peak              |
| 2  | * 10120.500     | 29.11          | 17.04      | 46.15                | -22.05      | 68.20          | Peak              |
| 3  | 10851.500       | 29.14          | 19.07      | 48.21                | -25.79      | 74.00          | Peak              |
| 4  | 15730.500       | 28.82          | 20.78      | 49.60                | -24.40      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5320 MHz | Test Voltage         | AC 120V/60Hz |

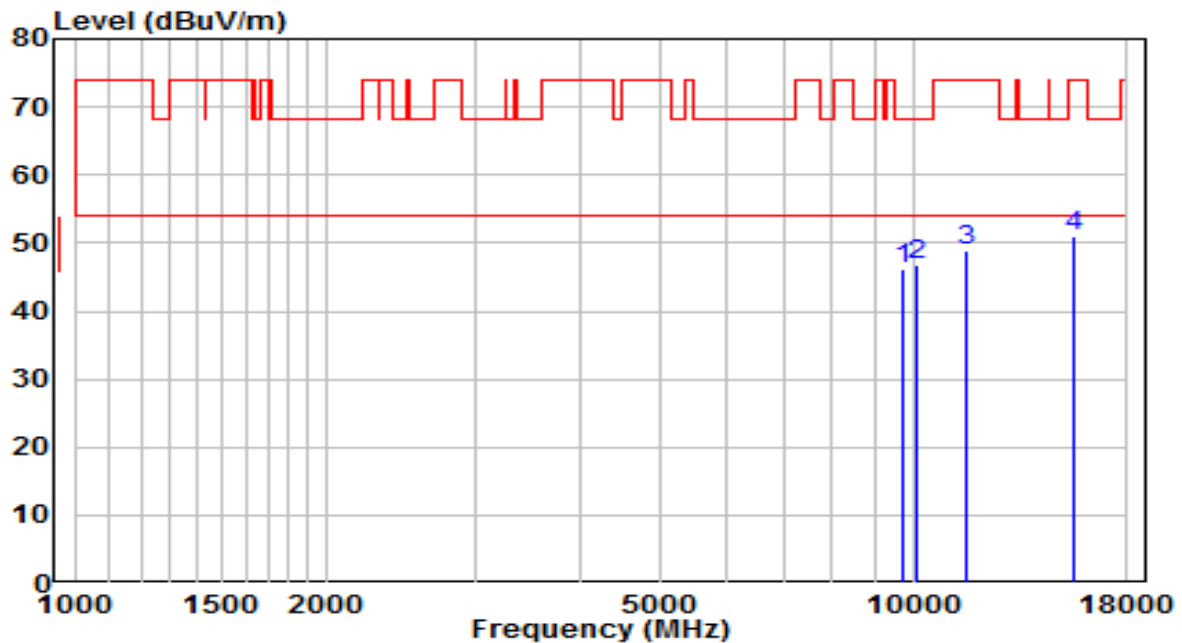


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9721.000        | 30.23          | 16.09      | 46.32                | -21.88      | 68.20          | Peak              |
| 2  | * 10086.500     | 29.80          | 16.91      | 46.71                | -21.49      | 68.20          | Peak              |
| 3  | 11565.500       | 28.95          | 19.90      | 48.85                | -25.15      | 74.00          | Peak              |
| 4  | 15518.000       | 29.66          | 21.31      | 50.97                | -23.03      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5500 MHz | Test Voltage         | AC 120V/60Hz |

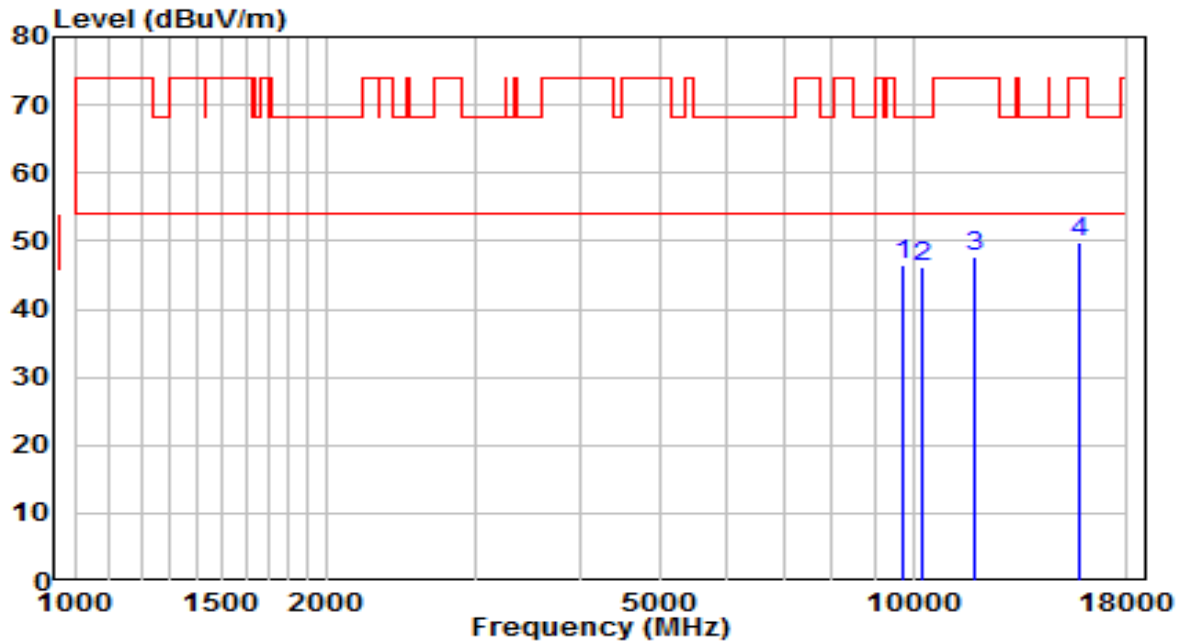


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 9712.500        | 30.45          | 16.08      | 46.53                | -21.67      | 68.20          | Peak              |
| 2  |   | 10239.500       | 28.57          | 17.52      | 46.09                | -22.11      | 68.20          | Peak              |
| 3  |   | 11871.500       | 28.56          | 19.21      | 47.77                | -26.23      | 74.00          | Peak              |
| 4  |   | 15773.000       | 29.15          | 20.67      | 49.82                | -24.18      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5500 MHz | Test Voltage         | AC 120V/60Hz |

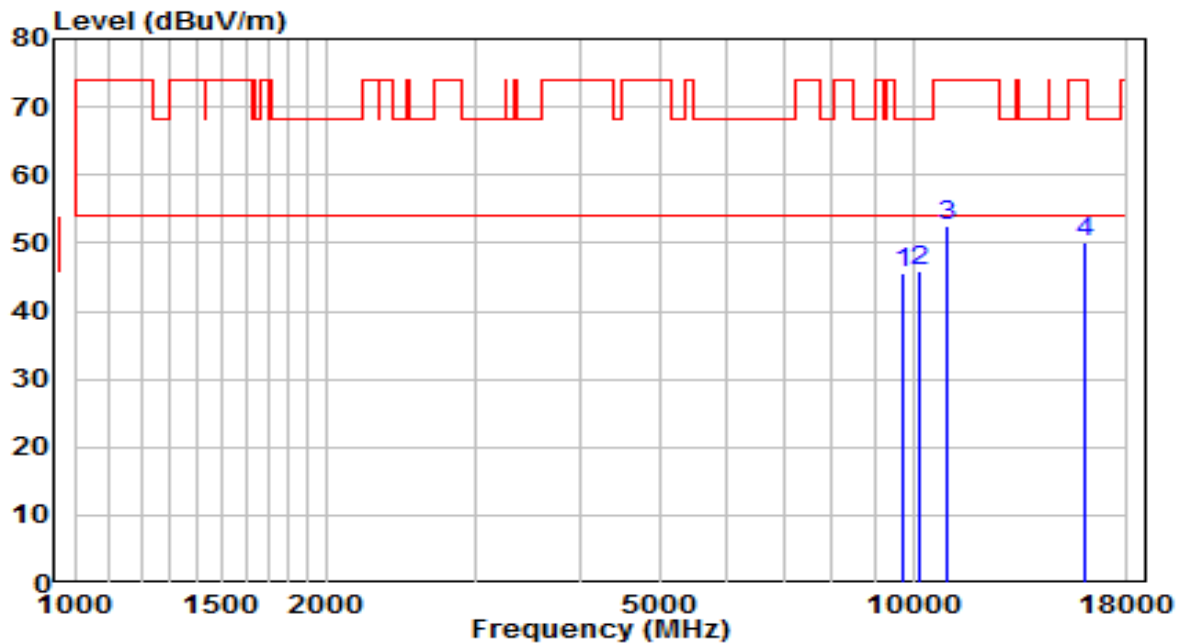


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9721.000        | 29.60          | 16.09      | 45.69                | -22.51      | 68.20          | Peak              |
| 2  | 10180.000       | 28.46          | 17.28      | 45.74                | -22.46      | 68.20          | Peak              |
| 3  | * 10996.000     | 33.33          | 19.27      | 52.60                | -21.40      | 74.00          | Peak              |
| 4  | 15977.000       | 29.93          | 20.17      | 50.10                | -23.90      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5580 MHz | Test Voltage         | AC 120V/60Hz |

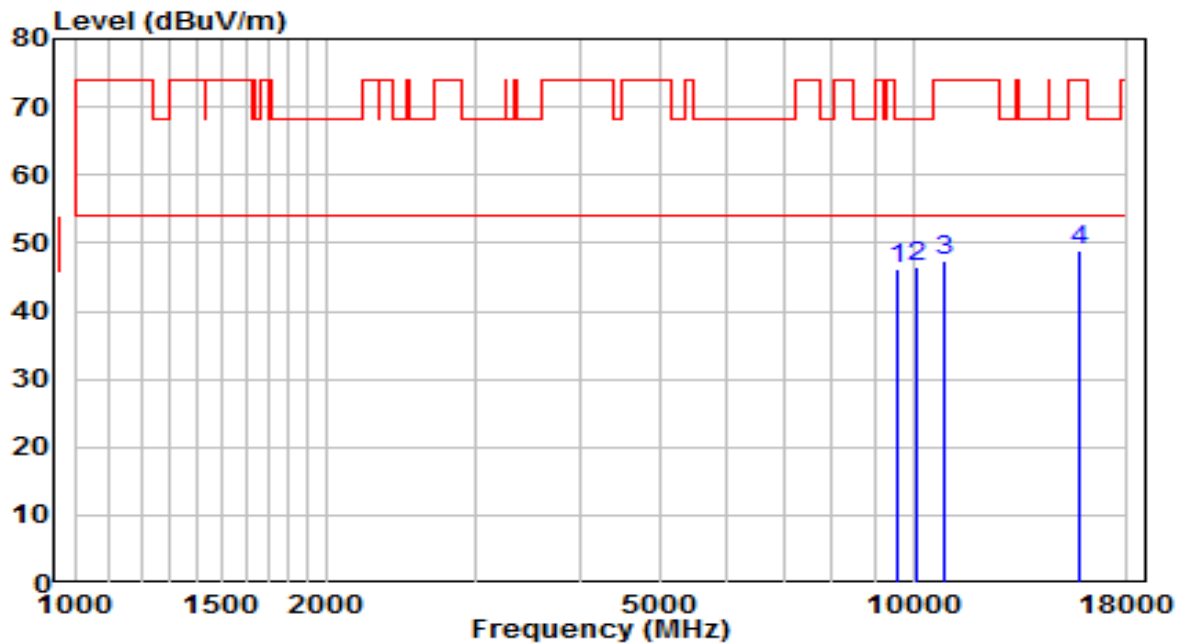


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9610.500        | 30.22          | 15.91      | 46.13                | -22.07      | 68.20          | Peak              |
| 2  | * 10120.500     | 29.51          | 17.04      | 46.56                | -21.64      | 68.20          | Peak              |
| 3  | 10868.500       | 28.21          | 19.09      | 47.30                | -26.70      | 74.00          | Peak              |
| 4  | 15798.500       | 28.42          | 20.61      | 49.03                | -24.97      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5580 MHz | Test Voltage         | AC 120V/60Hz |

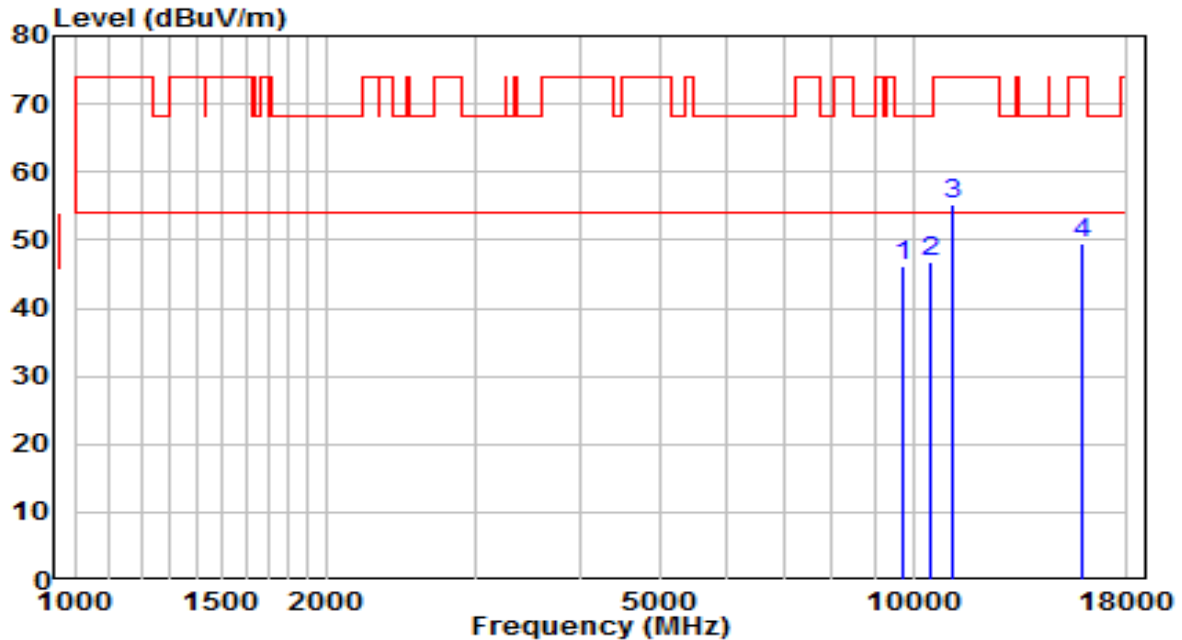


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9755.000        | 30.09          | 16.15      | 46.24                | -21.96      | 68.20          | Peak              |
| 2  | 10469.000       | 28.28          | 18.45      | 46.73                | -21.47      | 68.20          | Peak              |
| 3  | * 11157.500     | 35.87          | 19.52      | 55.39                | -18.61      | 74.00          | Peak              |
| 4  | 15926.000       | 29.13          | 20.29      | 49.42                | -24.58      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5700 MHz | Test Voltage         | AC 120V/60Hz |

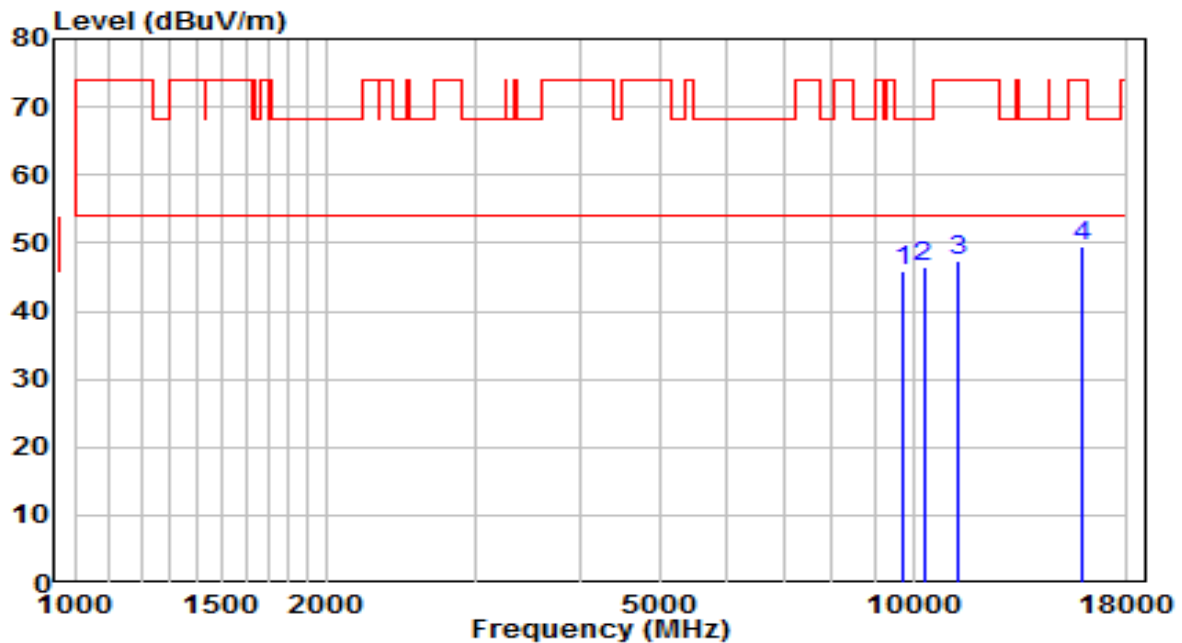


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9712.500        | 29.91          | 16.08      | 45.99                | -22.21      | 68.20          | Peak              |
| 2  | * 10290.500     | 28.70          | 17.73      | 46.43                | -21.77      | 68.20          | Peak              |
| 3  | 11293.500       | 27.79          | 19.73      | 47.52                | -26.48      | 74.00          | Peak              |
| 4  | 15892.000       | 29.28          | 20.38      | 49.66                | -24.34      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5700 MHz | Test Voltage         | AC 120V/60Hz |

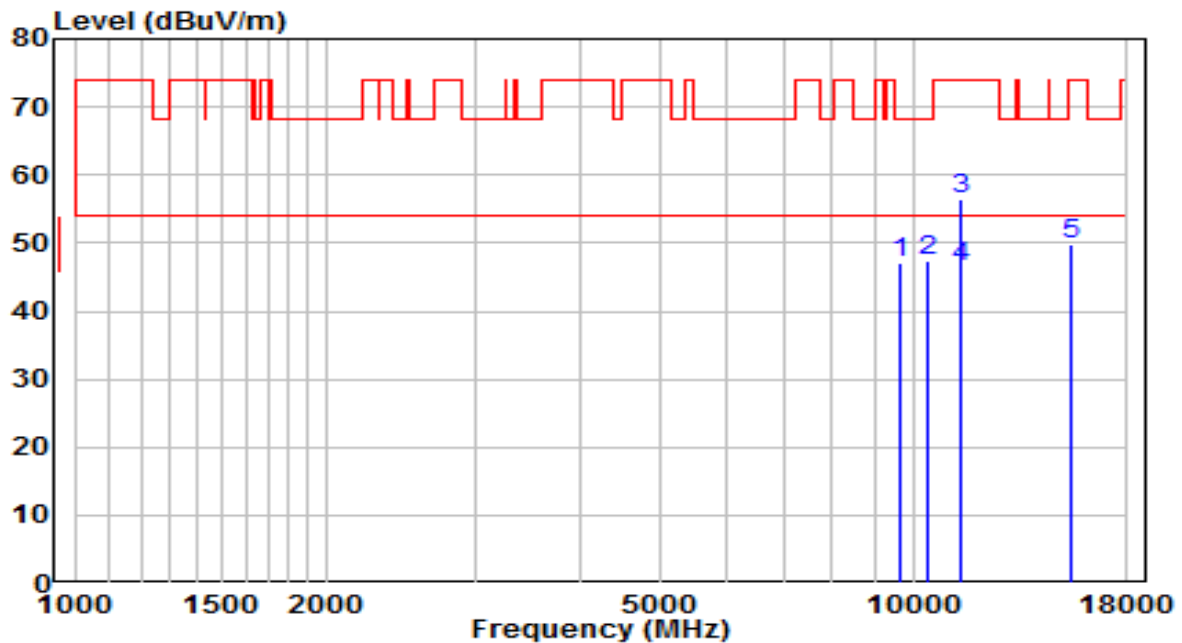


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9653.000        | 31.14          | 15.98      | 47.12                | -21.08      | 68.20          | Peak              |
| 2  | 10418.000       | 29.26          | 18.24      | 47.50                | -20.70      | 68.20          | Peak              |
| 3  | 11404.000       | 36.61          | 19.90      | 56.51                | -17.49      | 74.00          | Peak              |
| 4  | * 11404.000     | 26.64          | 19.90      | 46.54                | -7.46       | 54.00          | Average           |
| 5  | 15467.000       | 28.38          | 21.40      | 49.78                | -24.22      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5720 MHz | Test Voltage         | AC 120V/60Hz |

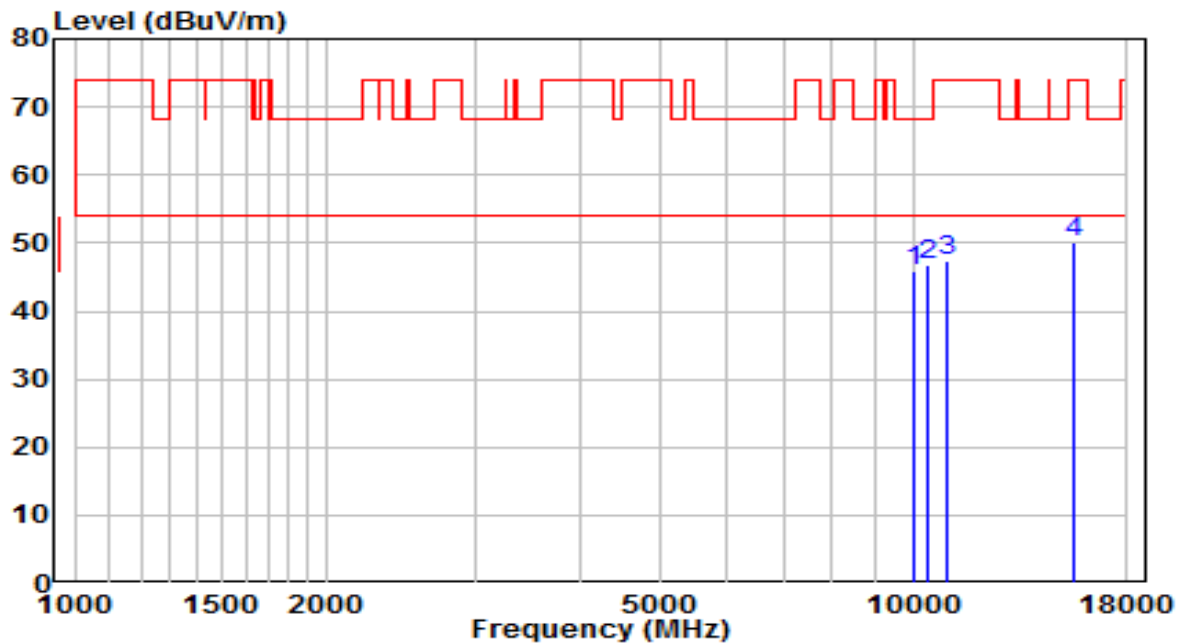


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10027.000       | 29.13          | 16.67      | 45.80                | -22.40      | 68.20          | Peak              |
| 2  | * 10401.000     | 28.51          | 18.17      | 46.68                | -21.52      | 68.20          | Peak              |
| 3  | 11013.000       | 28.01          | 19.30      | 47.31                | -26.69      | 74.00          | Peak              |
| 4  | 15552.000       | 28.77          | 21.22      | 49.99                | -24.01      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5720 MHz | Test Voltage         | AC 120V/60Hz |

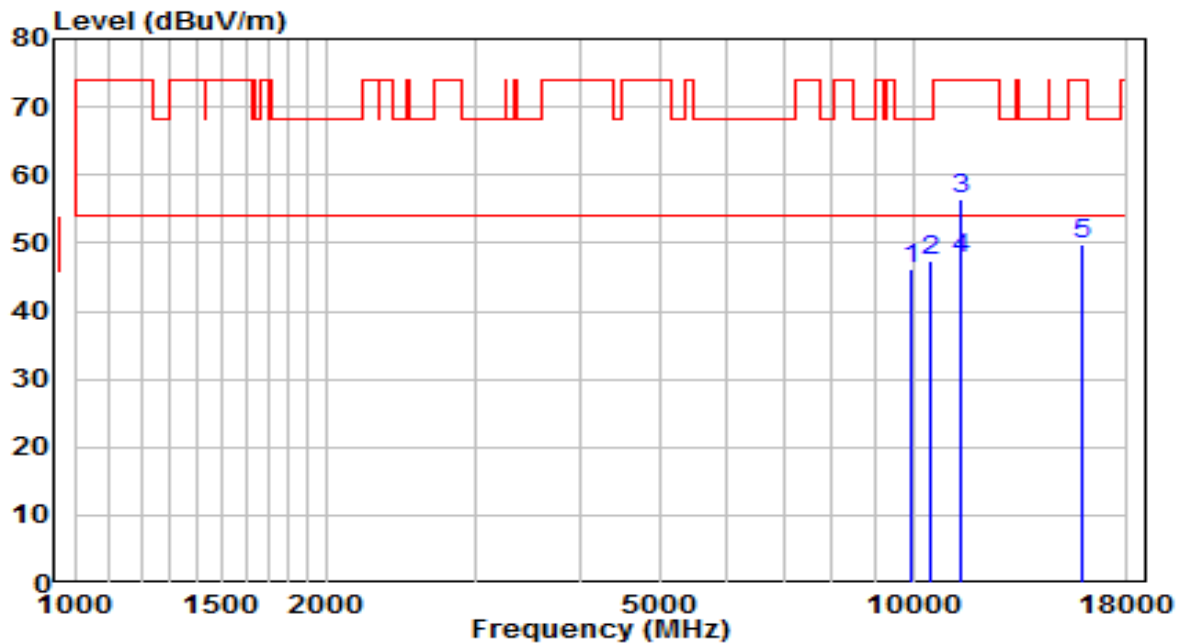


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9925.000        | 29.74          | 16.43      | 46.17                | -22.03      | 68.20          | Peak              |
| 2  | 10452.000       | 28.92          | 18.38      | 47.29                | -20.91      | 68.20          | Peak              |
| 3  | 11438.000       | 36.38          | 19.95      | 56.33                | -17.67      | 74.00          | Peak              |
| 4  | * 11438.000     | 27.88          | 19.95      | 47.83                | -6.17       | 54.00          | Average           |
| 5  | 15909.000       | 29.60          | 20.34      | 49.94                | -24.06      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5745 MHz | Test Voltage         | AC 120V/60Hz |

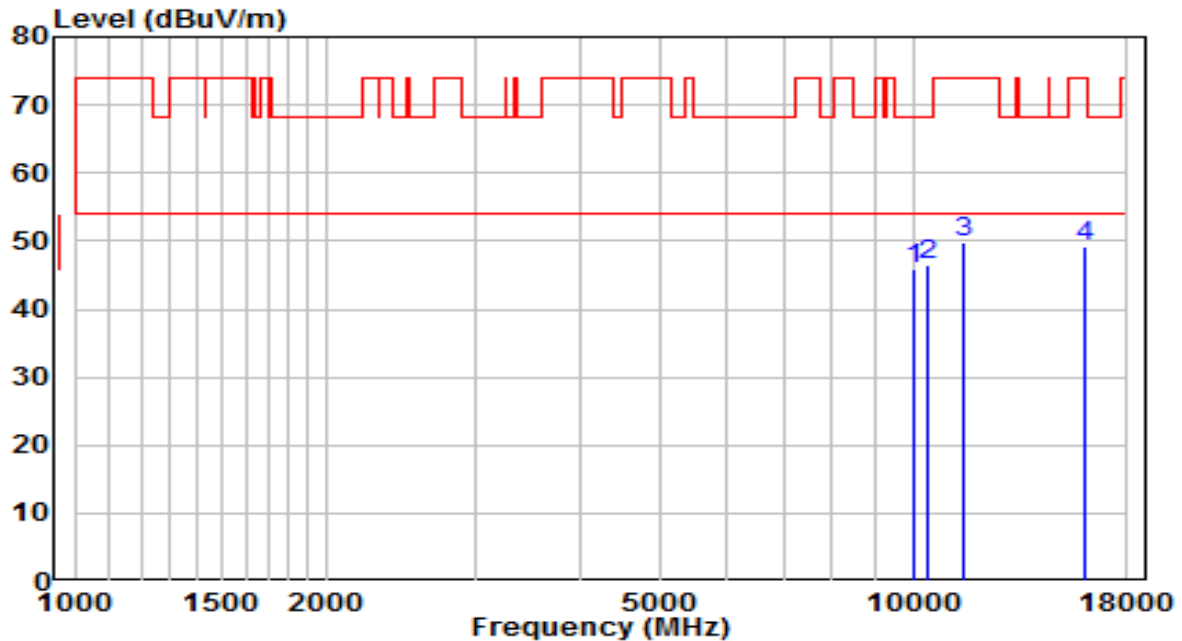


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10035.500       | 29.31          | 16.70      | 46.01                | -22.19      | 68.20          | Peak              |
| 2  | * 10443.500     | 28.00          | 18.34      | 46.34                | -21.86      | 68.20          | Peak              |
| 3  | 11489.000       | 29.86          | 20.03      | 49.89                | -24.11      | 74.00          | Peak              |
| 4  | 15977.000       | 29.08          | 20.17      | 49.25                | -24.75      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5745 MHz | Test Voltage         | AC 120V/60Hz |

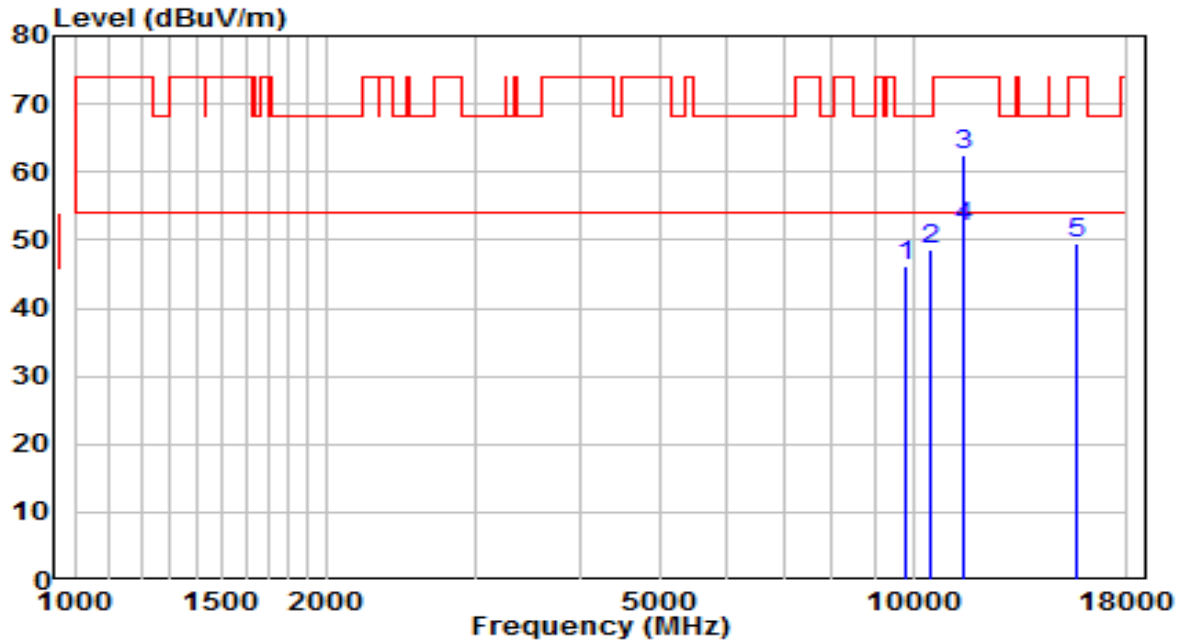


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9831.500        | 30.02          | 16.28      | 46.30                | -21.90      | 68.20          | Peak              |
| 2  | 10469.000       | 30.01          | 18.45      | 48.46                | -19.74      | 68.20          | Peak              |
| 3  | 11489.000       | 42.47          | 20.03      | 62.50                | -11.50      | 74.00          | Peak              |
| 4  | * 11489.000     | 31.75          | 20.03      | 51.78                | -2.22       | 54.00          | Average           |
| 5  | 15645.500       | 28.56          | 20.99      | 49.55                | -24.45      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5785 MHz | Test Voltage         | AC 120V/60Hz |

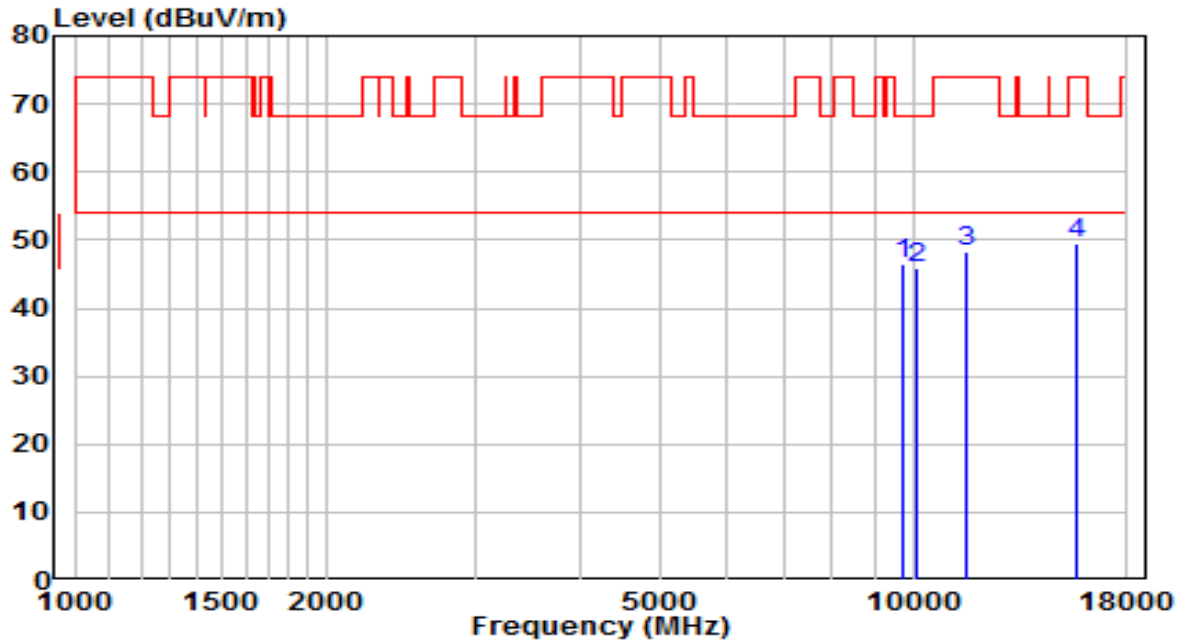


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 9746.500        | 30.22          | 16.13      | 46.35                | -21.85      | 68.20          | Peak              |
| 2  |   | 10095.000       | 28.84          | 16.94      | 45.78                | -22.42      | 68.20          | Peak              |
| 3  |   | 11574.000       | 28.31          | 19.88      | 48.19                | -25.81      | 74.00          | Peak              |
| 4  |   | 15654.000       | 28.53          | 20.97      | 49.50                | -24.50      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5785 MHz | Test Voltage         | AC 120V/60Hz |

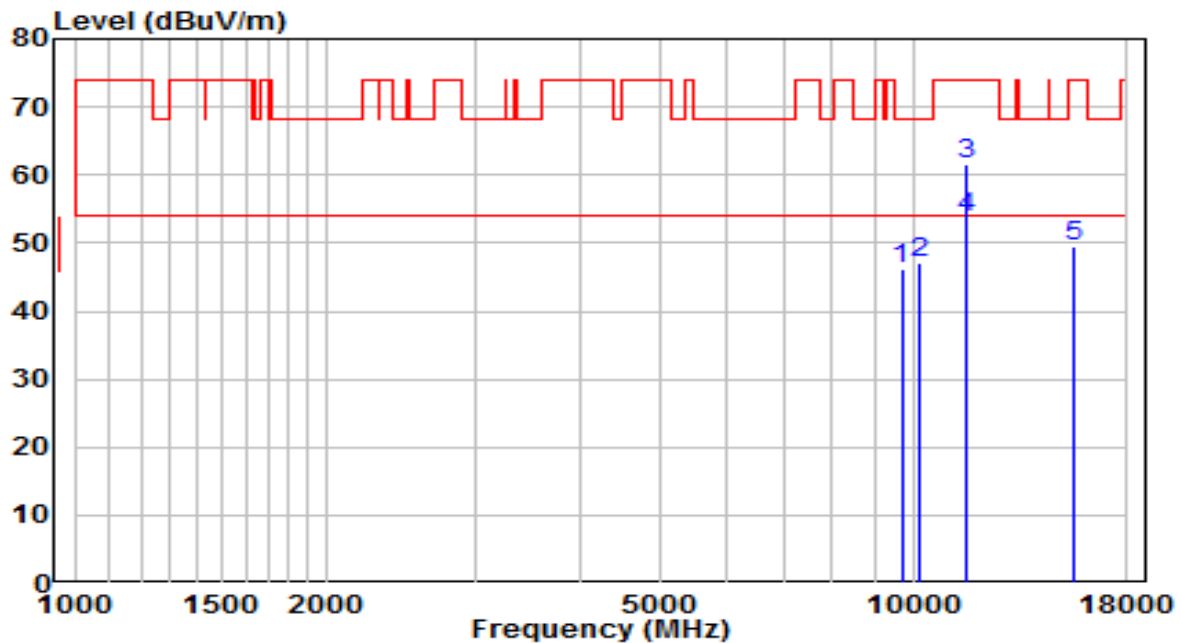


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9687.000        | 30.16          | 16.03      | 46.19                | -22.01      | 68.20          | Peak              |
| 2  | 10154.500       | 29.79          | 17.18      | 46.97                | -21.23      | 68.20          | Peak              |
| 3  | 11574.000       | 41.73          | 19.88      | 61.61                | -12.39      | 74.00          | Peak              |
| 4  | * 11574.000     | 33.81          | 19.88      | 53.69                | -0.31       | 54.00          | Average           |
| 5  | 15543.500       | 28.24          | 21.24      | 49.48                | -24.52      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                              | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5825 MHz | Test Voltage         | AC 120V/60Hz |

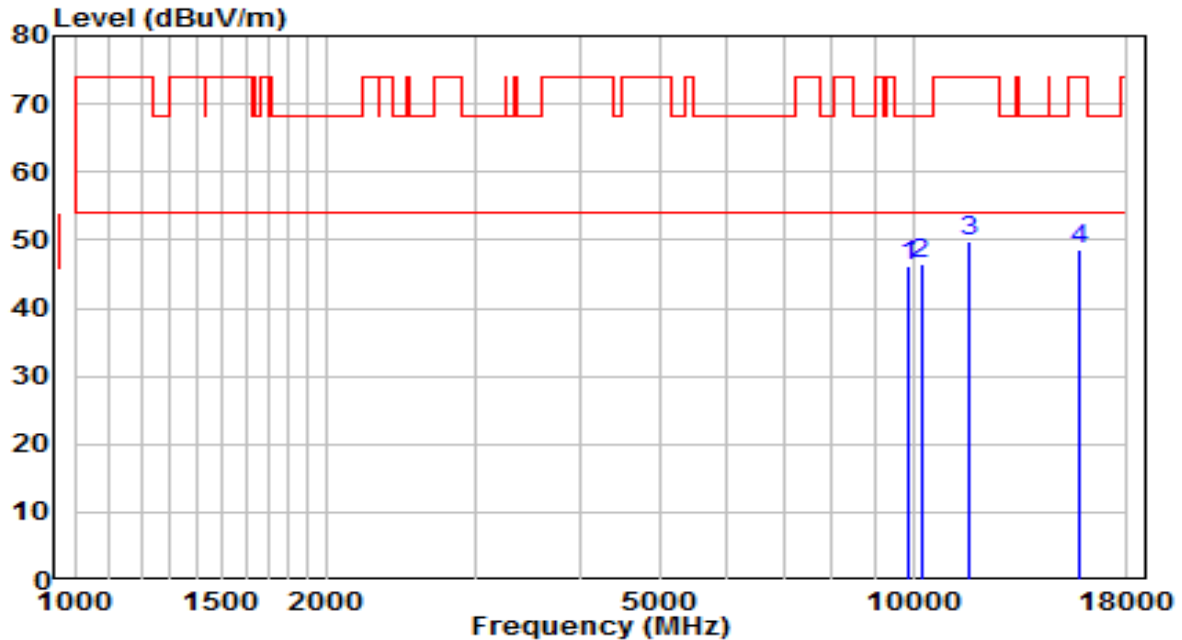


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9899.500        | 29.67          | 16.39      | 46.06                | -22.14      | 68.20          | Peak              |
| 2  | * 10214.000     | 29.05          | 17.42      | 46.47                | -21.73      | 68.20          | Peak              |
| 3  | 11650.500       | 30.01          | 19.71      | 49.72                | -24.28      | 74.00          | Peak              |
| 4  | 15747.500       | 27.83          | 20.74      | 48.57                | -25.43      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                         |                      |              |
|-----------|-----------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router           | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                              | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11a at Channel 5825 MHz | Test Voltage         | AC 120V/60Hz |

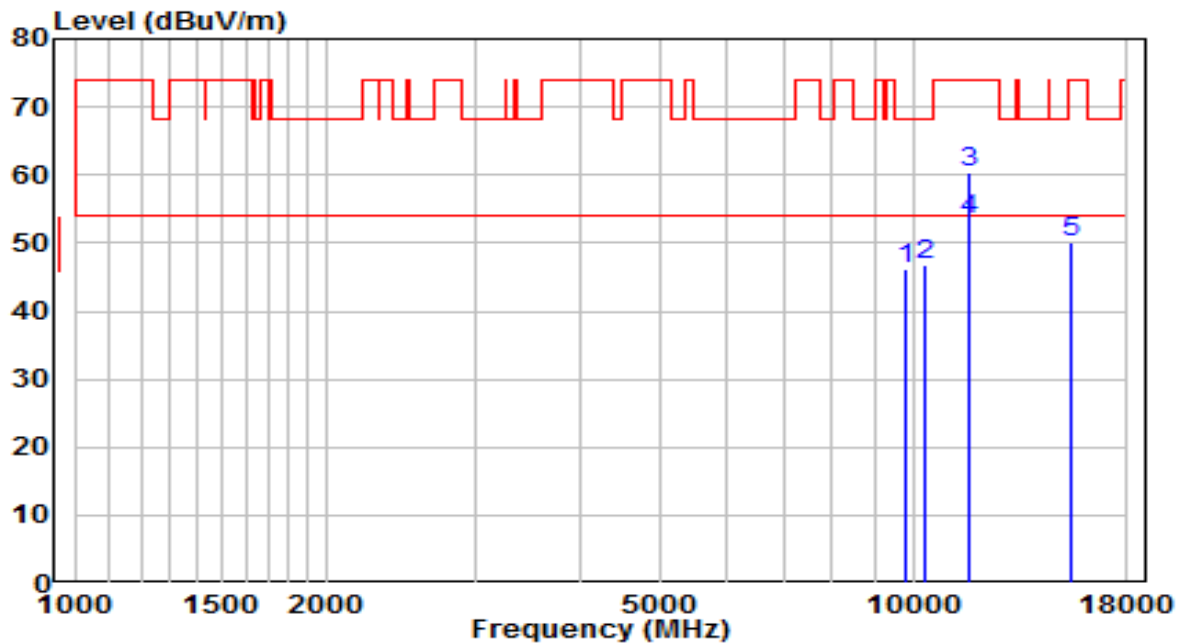


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9806.000        | 29.81          | 16.23      | 46.05                | -22.15      | 68.20          | Peak              |
| 2  | 10316.000       | 28.83          | 17.83      | 46.66                | -21.54      | 68.20          | Peak              |
| 3  | 11650.500       | 40.59          | 19.71      | 60.30                | -13.70      | 74.00          | Peak              |
| 4  | * 11650.500     | 33.71          | 19.71      | 53.42                | -0.58       | 54.00          | Average           |
| 5  | 15475.500       | 28.85          | 21.39      | 50.24                | -23.76      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5180 MHz | Test Voltage         | AC 120V/60Hz |

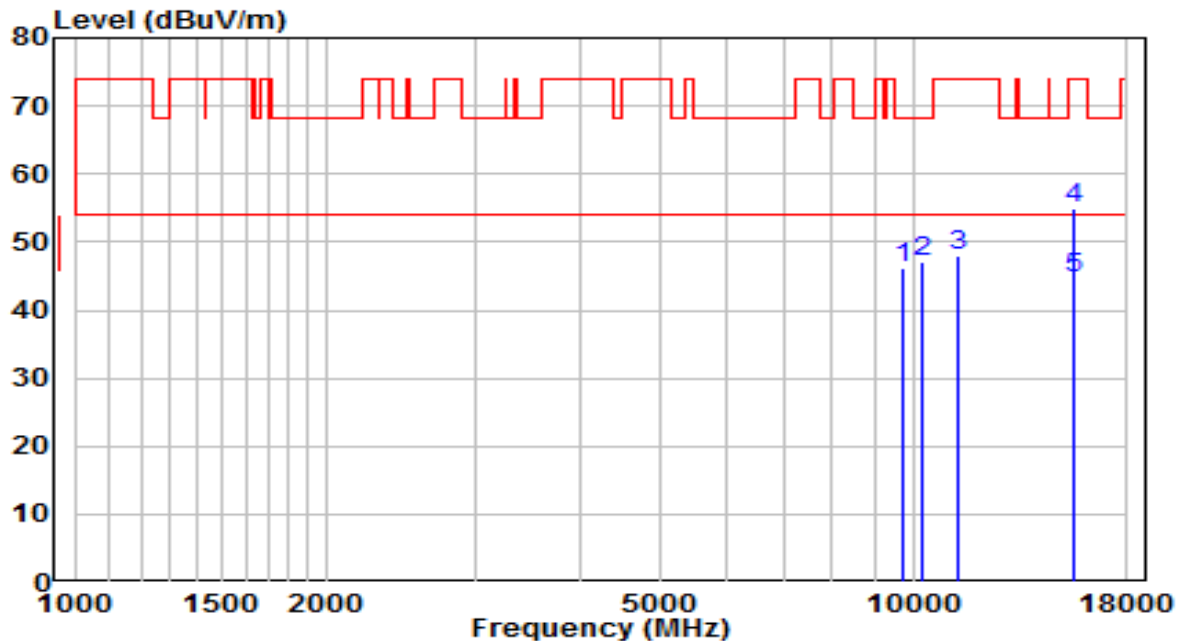


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9721.000        | 30.05          | 16.09      | 46.14                | -22.06      | 68.20          | Peak              |
| 2  | 10273.500       | 29.48          | 17.66      | 47.14                | -21.06      | 68.20          | Peak              |
| 3  | 11293.500       | 28.12          | 19.73      | 47.85                | -26.15      | 74.00          | Peak              |
| 4  | 15535.000       | 33.69          | 21.26      | 54.95                | -19.05      | 74.00          | Peak              |
| 5  | * 15535.000     | 23.37          | 21.26      | 44.63                | -9.37       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5180 MHz | Test Voltage         | AC 120V/60Hz |

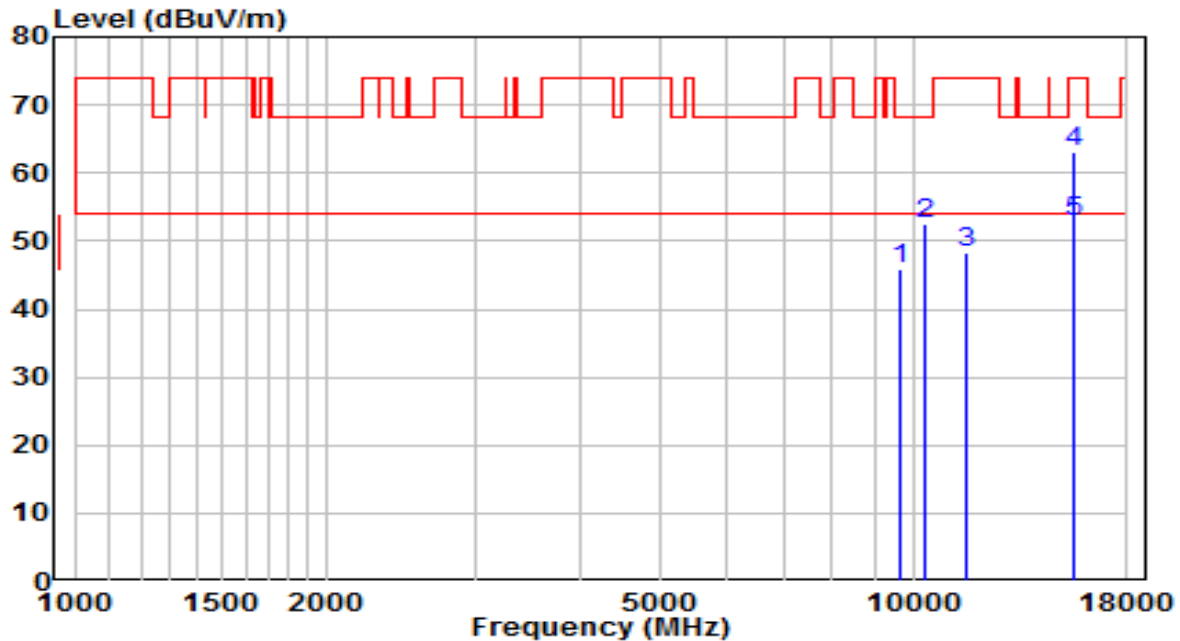


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9653.000        | 30.06          | 15.98      | 46.03                | -22.17      | 68.20          | Peak              |
| 2  | 10358.500       | 34.52          | 18.00      | 52.52                | -15.68      | 68.20          | Peak              |
| 3  | 11565.500       | 28.48          | 19.90      | 48.38                | -25.62      | 74.00          | Peak              |
| 4  | 15543.500       | 41.84          | 21.24      | 63.08                | -10.92      | 74.00          | Peak              |
| 5  | * 15543.500     | 31.58          | 21.24      | 52.82                | -1.18       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5220 MHz | Test Voltage         | AC 120V/60Hz |

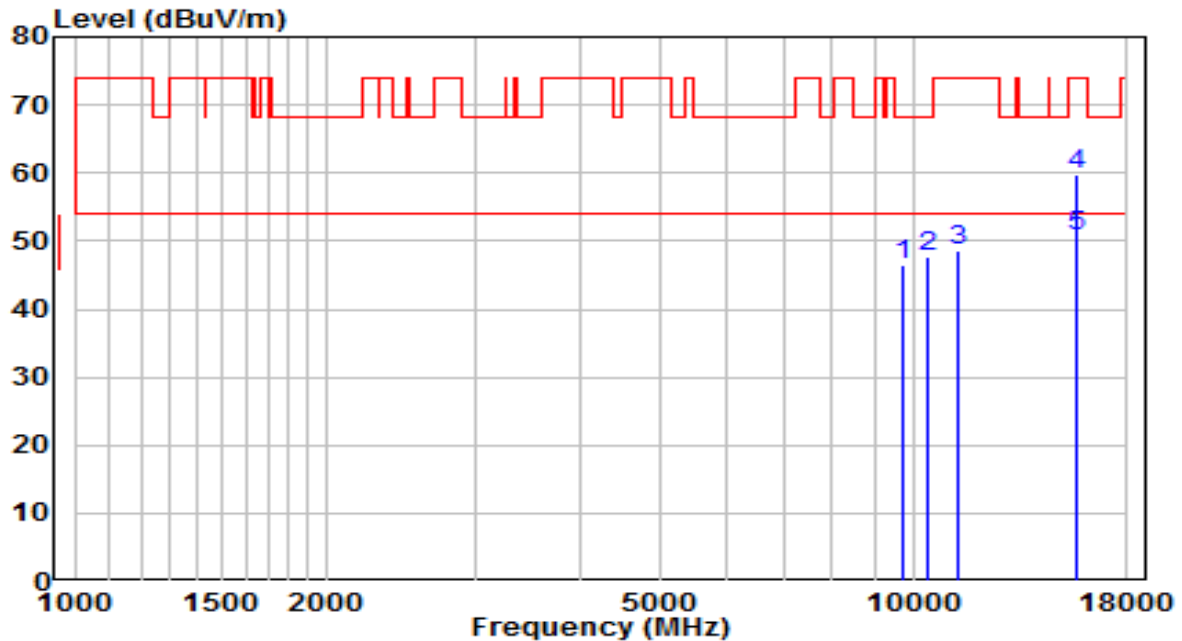


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9721.000        | 30.46          | 16.09      | 46.55                | -21.65      | 68.20          | Peak              |
| 2  | 10443.500       | 29.47          | 18.34      | 47.81                | -20.39      | 68.20          | Peak              |
| 3  | 11285.000       | 28.89          | 19.72      | 48.61                | -25.39      | 74.00          | Peak              |
| 4  | 15662.500       | 38.69          | 20.95      | 59.64                | -14.36      | 74.00          | Peak              |
| 5  | * 15662.500     | 29.76          | 20.95      | 50.71                | -3.29       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5220 MHz | Test Voltage         | AC 120V/60Hz |

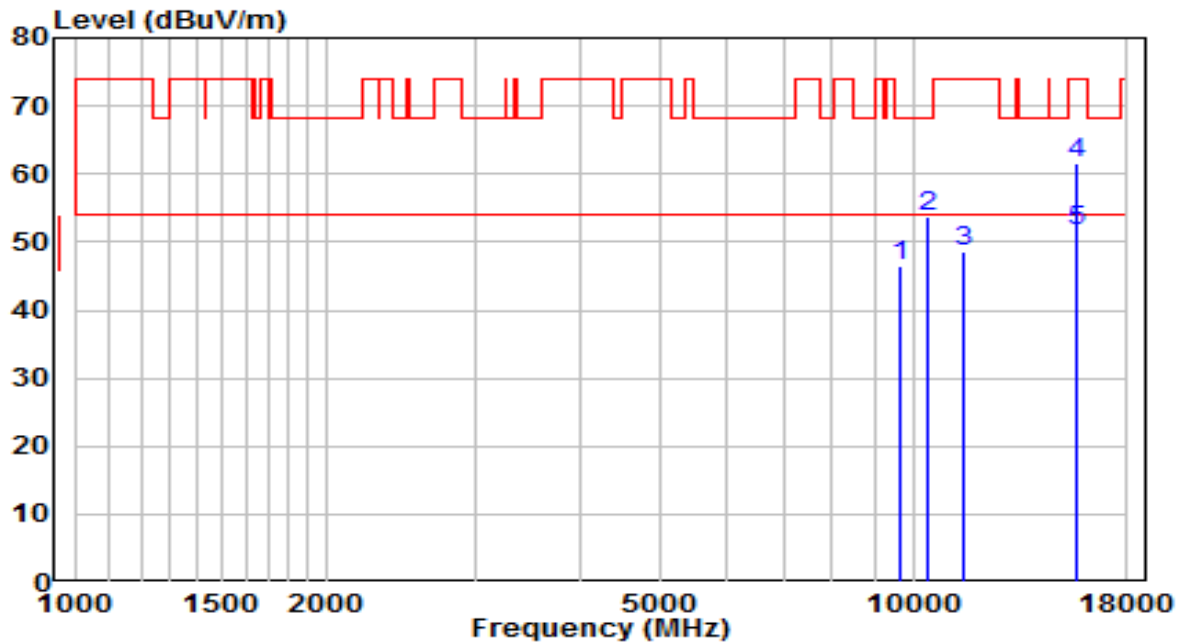


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9661.500        | 30.44          | 15.99      | 46.43                | -21.77      | 68.20          | Peak              |
| 2  | 10435.000       | 35.32          | 18.31      | 53.63                | -14.57      | 68.20          | Peak              |
| 3  | 11489.000       | 28.46          | 20.03      | 48.49                | -25.51      | 74.00          | Peak              |
| 4  | 15654.000       | 40.57          | 20.97      | 61.54                | -12.46      | 74.00          | Peak              |
| 5  | * 15654.000     | 30.61          | 20.97      | 51.58                | -2.42       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5240 MHz | Test Voltage         | AC 120V/60Hz |

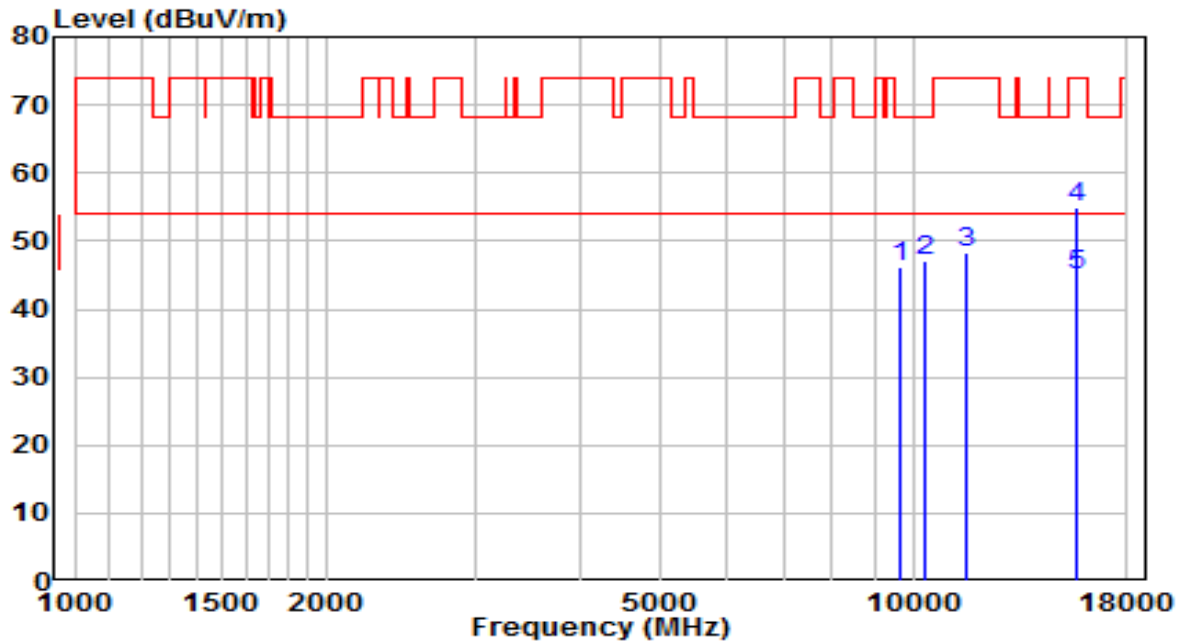


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9653.000        | 30.13          | 15.98      | 46.11                | -22.09      | 68.20          | Peak              |
| 2  | 10324.500       | 29.30          | 17.86      | 47.16                | -21.04      | 68.20          | Peak              |
| 3  | 11582.500       | 28.30          | 19.86      | 48.16                | -25.84      | 74.00          | Peak              |
| 4  | 15713.500       | 34.00          | 20.82      | 54.82                | -19.18      | 74.00          | Peak              |
| 5  | * 15713.500     | 24.04          | 20.82      | 44.86                | -9.14       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5240 MHz | Test Voltage         | AC 120V/60Hz |

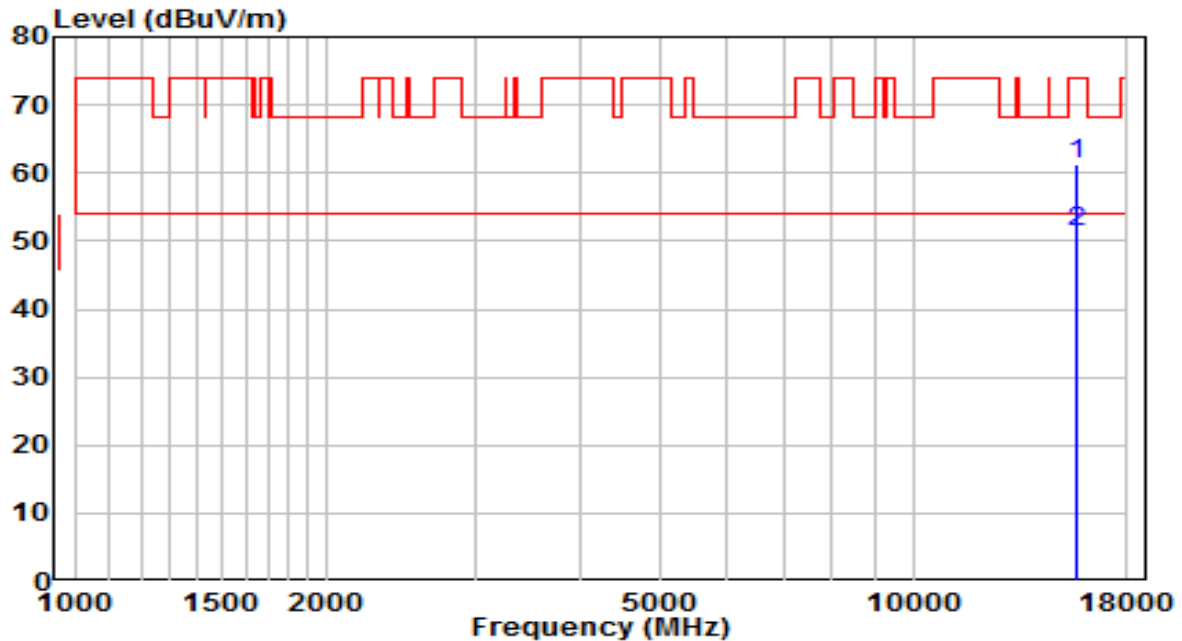


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 15722.000       | 40.51          | 20.80      | 61.31                | -12.69      | 74.00          | Peak              |
| 2  | * 15722.000     | 30.50          | 20.80      | 51.30                | -2.70       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5260 MHz | Test Voltage         | AC 120V/60Hz |

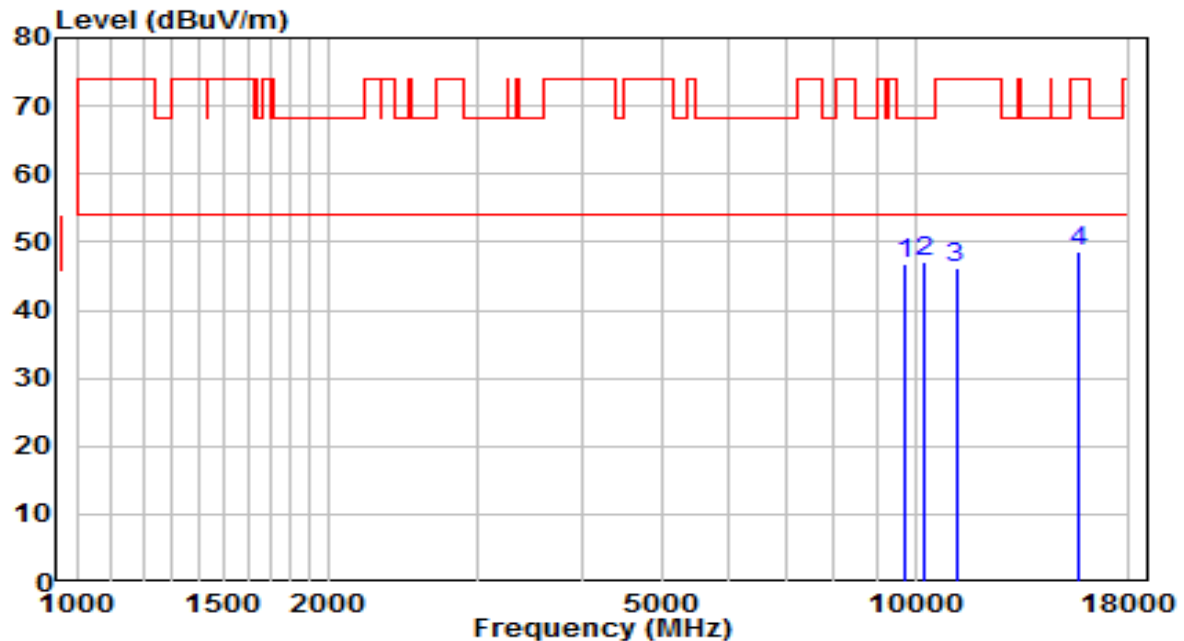


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9721.000        | 30.56          | 16.09      | 46.65                | -21.55      | 68.20          | Peak              |
| 2  | * 10239.500     | 29.67          | 17.52      | 47.19                | -21.01      | 68.20          | Peak              |
| 3  | 11183.000       | 26.58          | 19.56      | 46.14                | -27.86      | 74.00          | Peak              |
| 4  | 15654.000       | 27.77          | 20.97      | 48.74                | -25.26      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5260 MHz | Test Voltage         | AC 120V/60Hz |

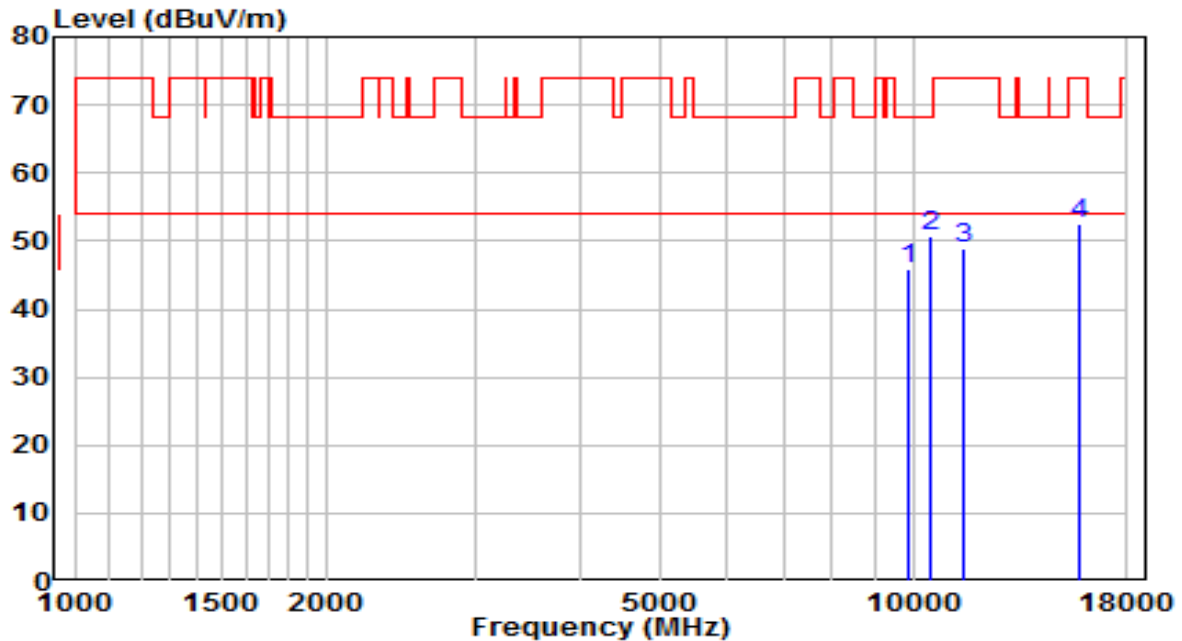


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9891.000        | 29.58          | 16.38      | 45.95                | -22.25      | 68.20          | Peak              |
| 2  | * 10503.000     | 32.21          | 18.57      | 50.78                | -17.42      | 68.20          | Peak              |
| 3  | 11497.500       | 28.99          | 20.05      | 49.04                | -24.96      | 74.00          | Peak              |
| 4  | 15773.000       | 31.83          | 20.67      | 52.50                | -21.50      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5300 MHz | Test Voltage         | AC 120V/60Hz |

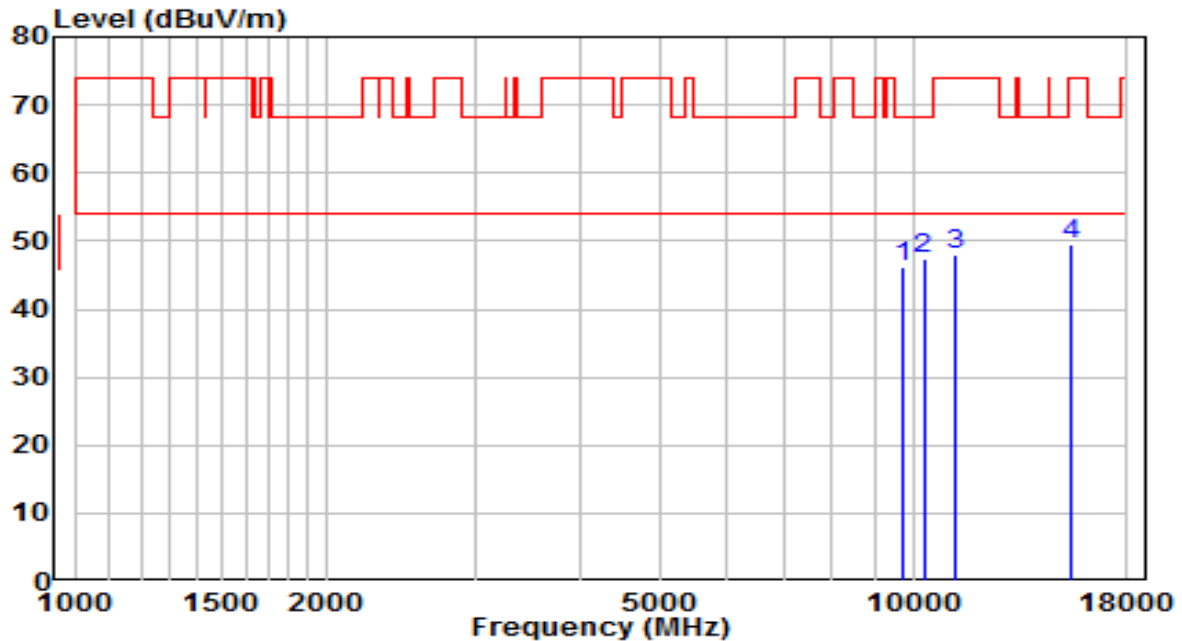


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9738.000        | 29.96          | 16.12      | 46.08                | -22.12      | 68.20          | Peak              |
| 2  | * 10290.500     | 29.65          | 17.73      | 47.37                | -20.83      | 68.20          | Peak              |
| 3  | 11225.500       | 28.35          | 19.63      | 47.98                | -26.02      | 74.00          | Peak              |
| 4  | 15450.000       | 27.94          | 21.42      | 49.36                | -24.64      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5300 MHz | Test Voltage         | AC 120V/60Hz |

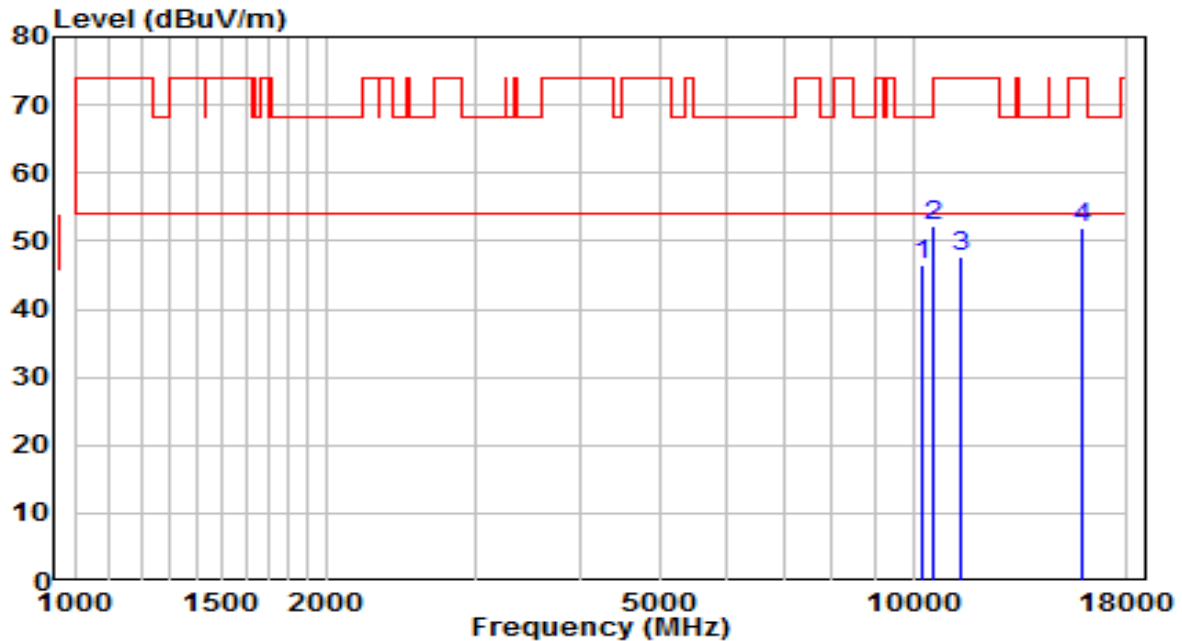


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10282.000       | 28.66          | 17.69      | 46.35                | -21.85      | 68.20          | Peak              |
| 2  | * 10596.500     | 33.58          | 18.71      | 52.29                | -15.91      | 68.20          | Peak              |
| 3  | 11378.500       | 27.97          | 19.86      | 47.83                | -26.17      | 74.00          | Peak              |
| 4  | 15900.500       | 31.48          | 20.36      | 51.84                | -22.16      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5320MHz | Test Voltage         | AC 120V/60Hz |

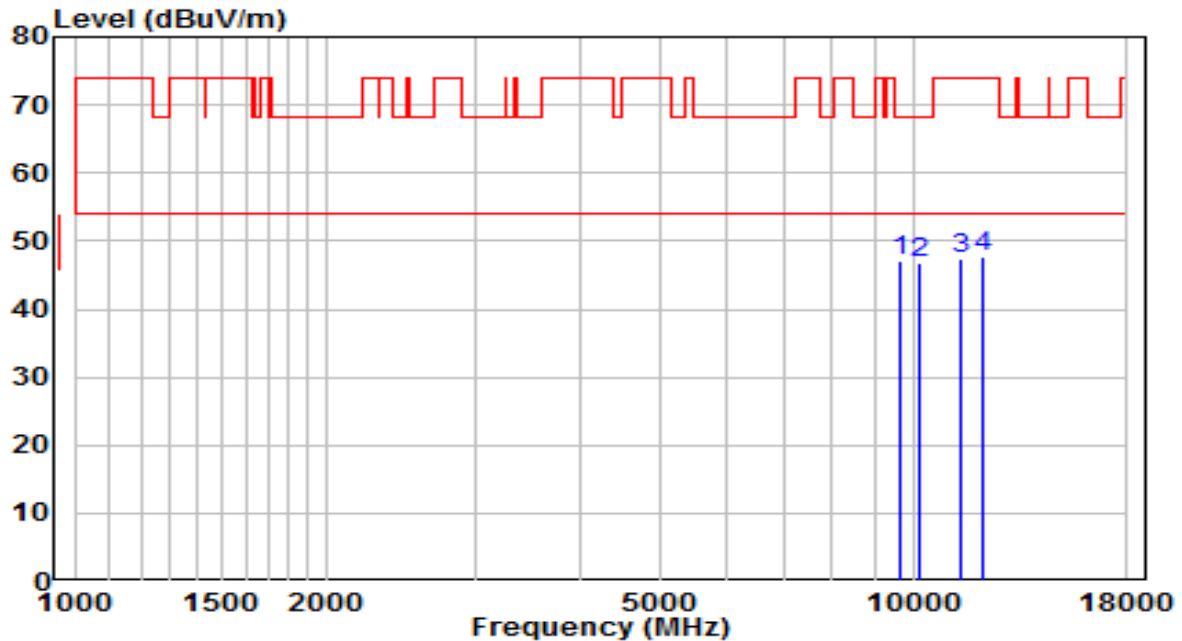


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 9653.000        | 31.15          | 15.98      | 47.13                | -21.07      | 68.20          | Peak              |
| 2  |   | 10171.500       | 29.48          | 17.25      | 46.73                | -21.47      | 68.20          | Peak              |
| 3  |   | 11438.000       | 27.52          | 19.95      | 47.47                | -26.53      | 74.00          | Peak              |
| 4  |   | 12118.000       | 29.04          | 18.80      | 47.84                | -26.16      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5320MHz | Test Voltage         | AC 120V/60Hz |

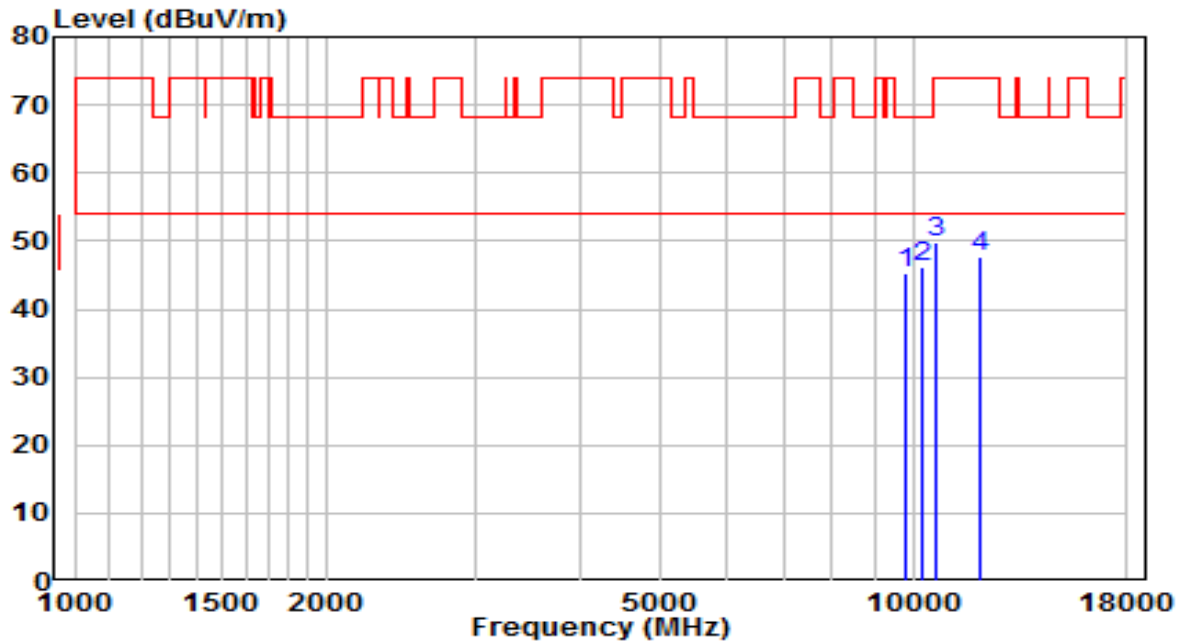


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9806.000        | 29.13          | 16.23      | 45.37                | -22.83      | 68.20          | Peak              |
| 2  | * 10282.000     | 28.60          | 17.69      | 46.30                | -21.90      | 68.20          | Peak              |
| 3  | 10639.000       | 30.97          | 18.77      | 49.73                | -24.27      | 74.00          | Peak              |
| 4  | 12058.500       | 28.71          | 18.86      | 47.57                | -26.43      | 74.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5500 MHz | Test Voltage         | AC 120V/60Hz |

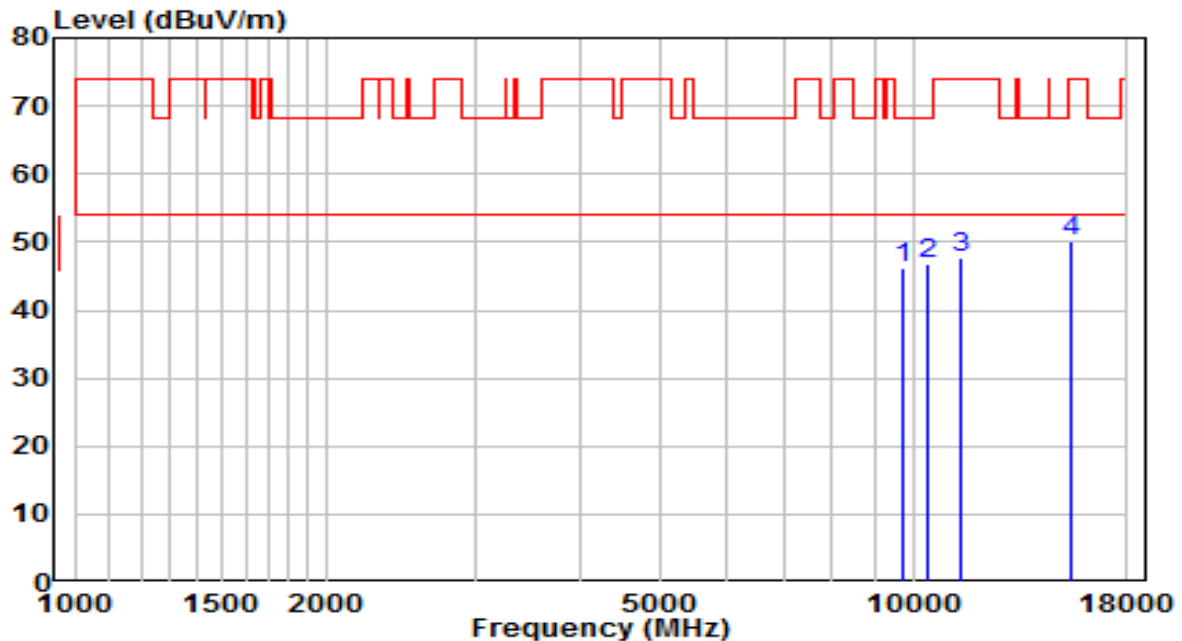


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9721.000        | 30.05          | 16.09      | 46.14                | -22.06      | 68.20          | Peak              |
| 2  | * 10426.500     | 28.67          | 18.27      | 46.94                | -21.26      | 68.20          | Peak              |
| 3  | 11421.000       | 27.62          | 19.93      | 47.55                | -26.45      | 74.00          | Peak              |
| 4  | 15441.500       | 28.59          | 21.44      | 50.03                | -23.97      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5500 MHz | Test Voltage         | AC 120V/60Hz |

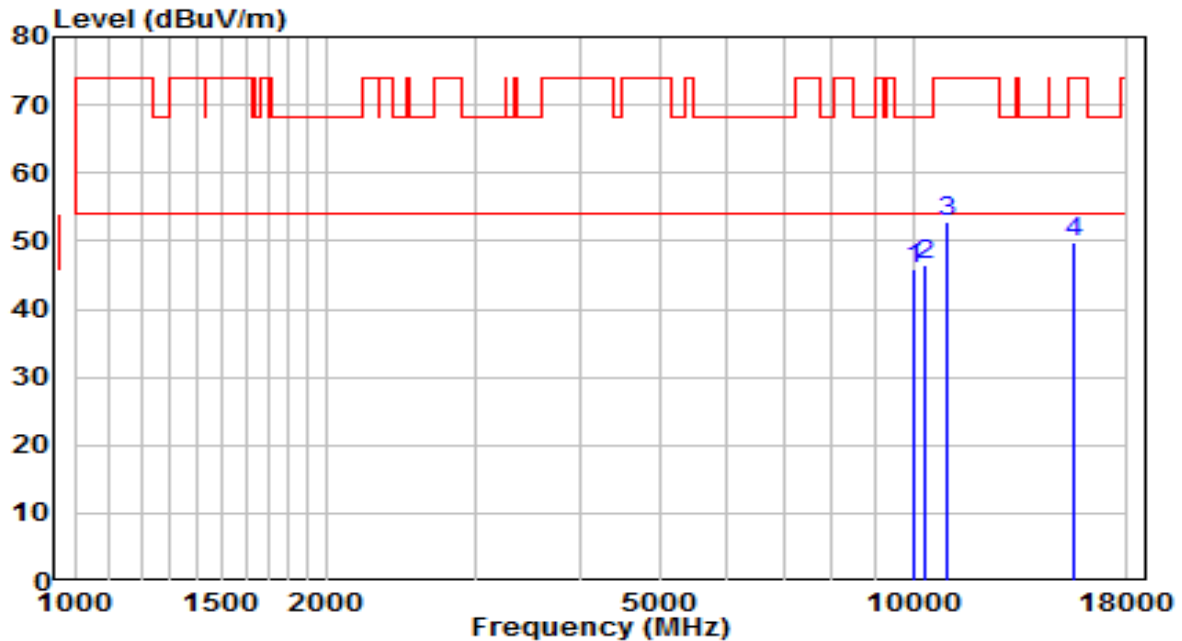


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10001.500       | 29.40          | 16.57      | 45.97                | -22.23      | 68.20          | Peak              |
| 2  | 10316.000       | 28.52          | 17.83      | 46.35                | -21.85      | 68.20          | Peak              |
| 3  | * 11004.500     | 33.49          | 19.29      | 52.78                | -21.22      | 74.00          | Peak              |
| 4  | 15501.000       | 28.45          | 21.35      | 49.80                | -24.20      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |              |
|-----------|--------------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                    | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                       | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5580<br>MHz | Test Voltage         | AC 120V/60Hz |

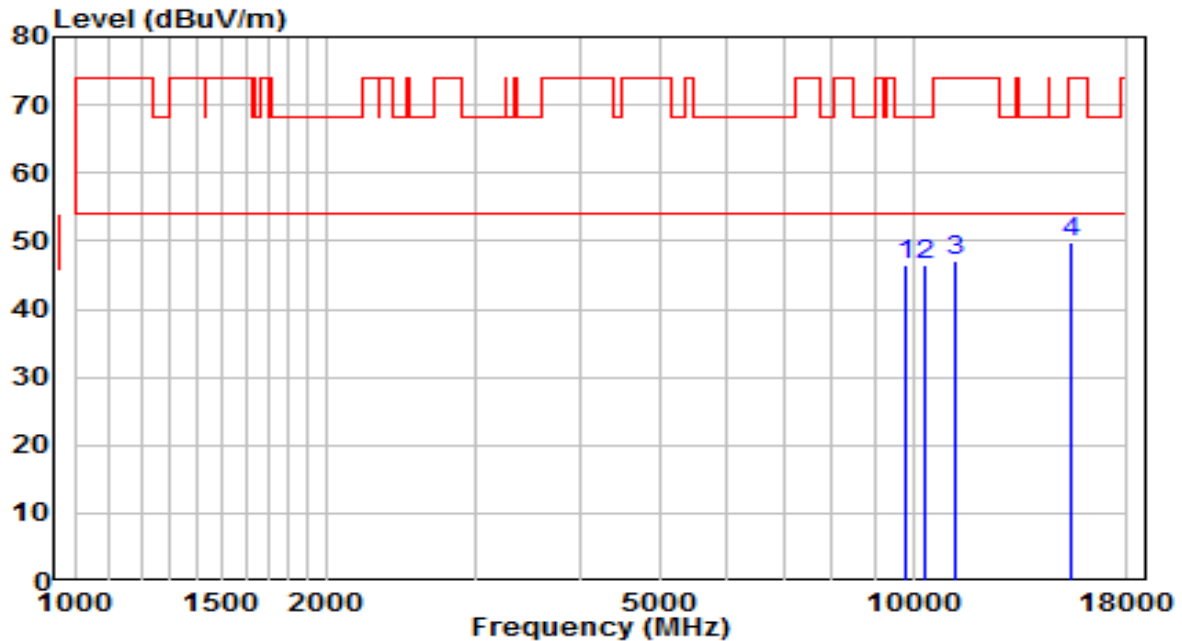


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9823.000        | 30.31          | 16.26      | 46.57                | -21.63      | 68.20          | Peak              |
| 2  | * 10341.500     | 28.67          | 17.93      | 46.60                | -21.60      | 68.20          | Peak              |
| 3  | 11259.500       | 27.52          | 19.68      | 47.20                | -26.80      | 74.00          | Peak              |
| 4  | 15441.500       | 28.29          | 21.44      | 49.73                | -24.27      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5580 MHz | Test Voltage         | AC 120V/60Hz |

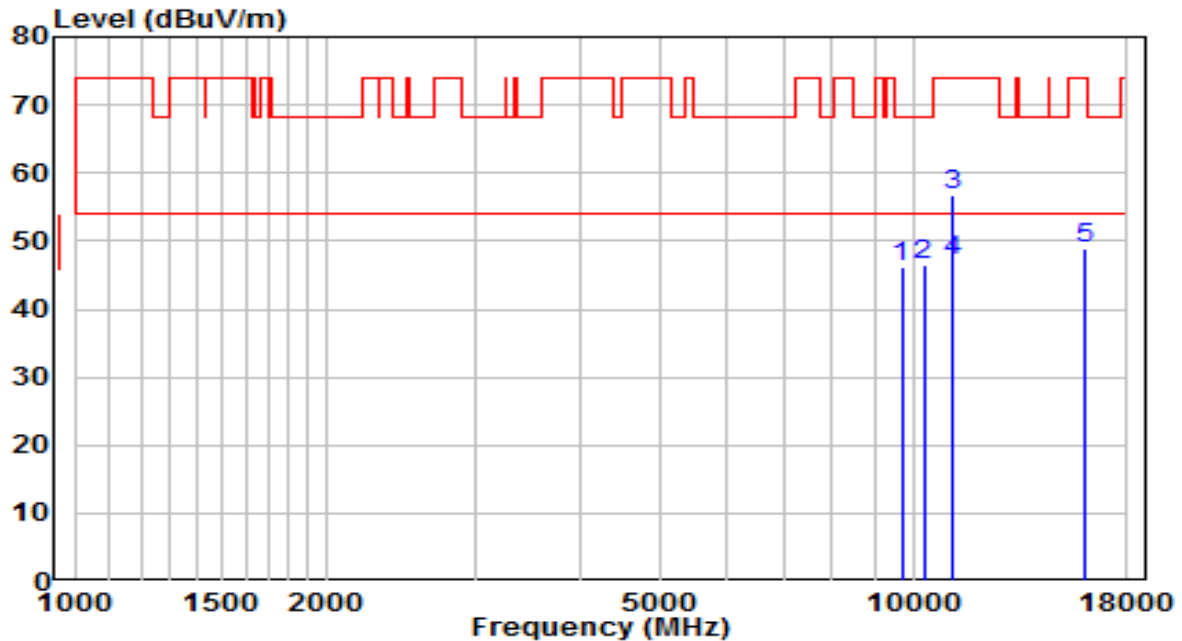


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9687.000        | 30.02          | 16.03      | 46.06                | -22.14      | 68.20          | Peak              |
| 2  | 10290.500       | 28.72          | 17.73      | 46.45                | -21.75      | 68.20          | Peak              |
| 3  | 11157.500       | 37.12          | 19.52      | 56.64                | -17.36      | 74.00          | Peak              |
| 4  | * 11157.500     | 27.53          | 19.52      | 47.05                | -6.95       | 54.00          | Average           |
| 5  | 15977.000       | 28.75          | 20.17      | 48.92                | -25.08      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5700MHz | Test Voltage         | AC 120V/60Hz |

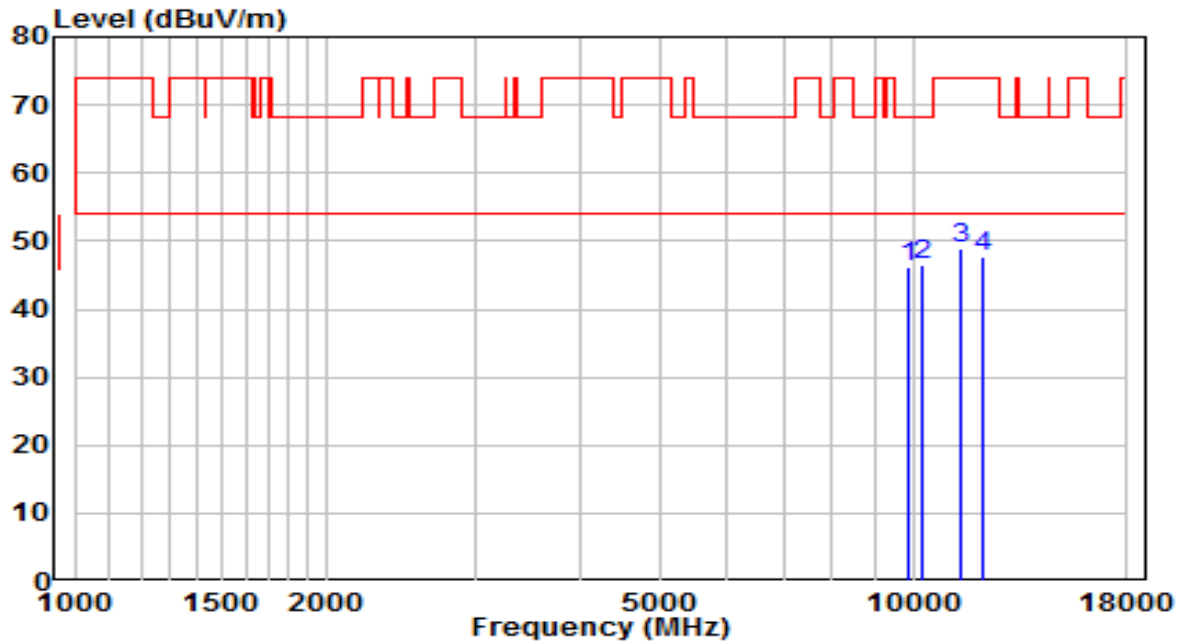


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9874.000        | 29.83          | 16.35      | 46.18                | -22.02      | 68.20          | Peak              |
| 2  | * 10248.000     | 29.01          | 17.56      | 46.56                | -21.64      | 68.20          | Peak              |
| 3  | 11395.500       | 29.04          | 19.89      | 48.93                | -25.07      | 74.00          | Peak              |
| 4  | 12101.000       | 28.96          | 18.82      | 47.77                | -26.23      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5700MHz | Test Voltage         | AC 120V/60Hz |

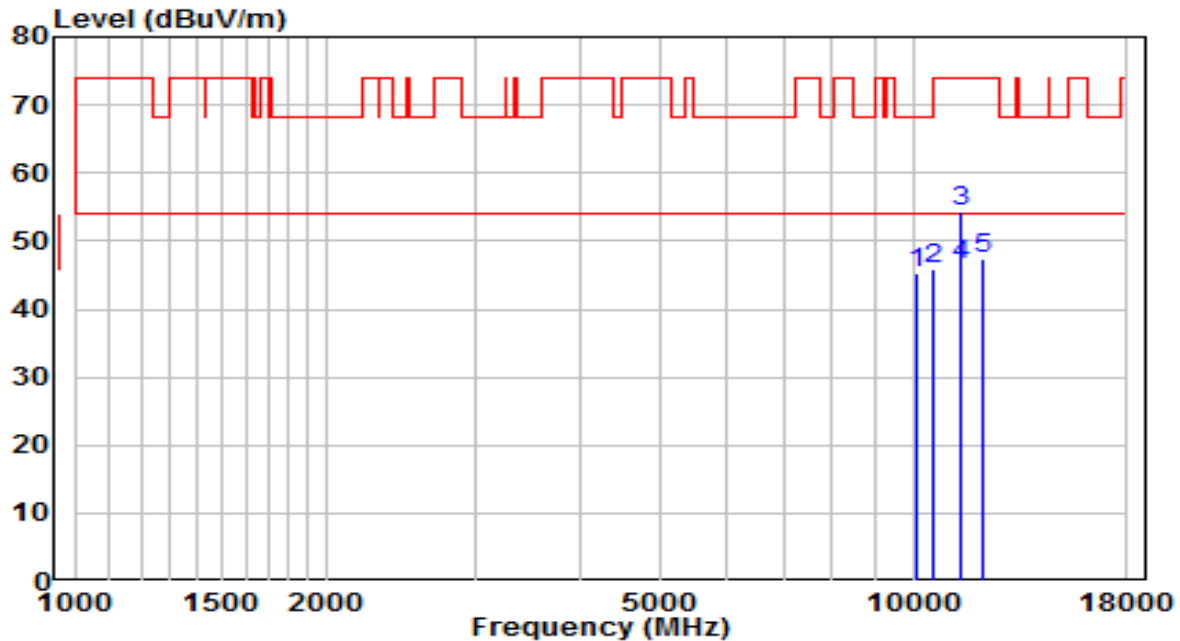


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10103.500       | 28.29          | 16.98      | 45.27                | -22.93      | 68.20          | Peak              |
| 2  | 10596.500       | 27.31          | 18.71      | 46.02                | -22.18      | 68.20          | Peak              |
| 3  | 11395.500       | 34.50          | 19.89      | 54.39                | -19.61      | 74.00          | Peak              |
| 4  | * 11395.500     | 26.72          | 19.89      | 46.61                | -7.39       | 54.00          | Average           |
| 5  | 12143.500       | 28.52          | 18.77      | 47.29                | -26.71      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5720 MHz | Test Voltage         | AC 120V/60Hz |

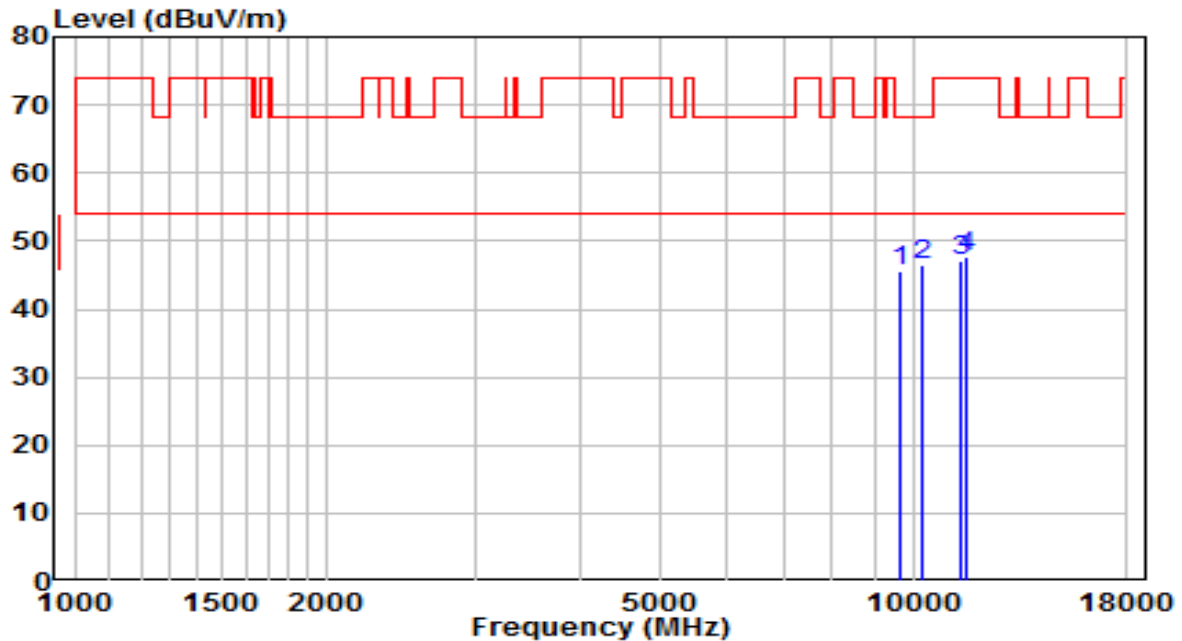


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9670.000        | 29.46          | 16.01      | 45.46                | -22.74      | 68.20          | Peak              |
| 2  | * 10256.500     | 28.98          | 17.59      | 46.57                | -21.63      | 68.20          | Peak              |
| 3  | 11387.000       | 27.28          | 19.88      | 47.16                | -26.84      | 74.00          | Peak              |
| 4  | 11574.000       | 27.73          | 19.88      | 47.61                | -26.39      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5720 MHz | Test Voltage         | AC 120V/60Hz |

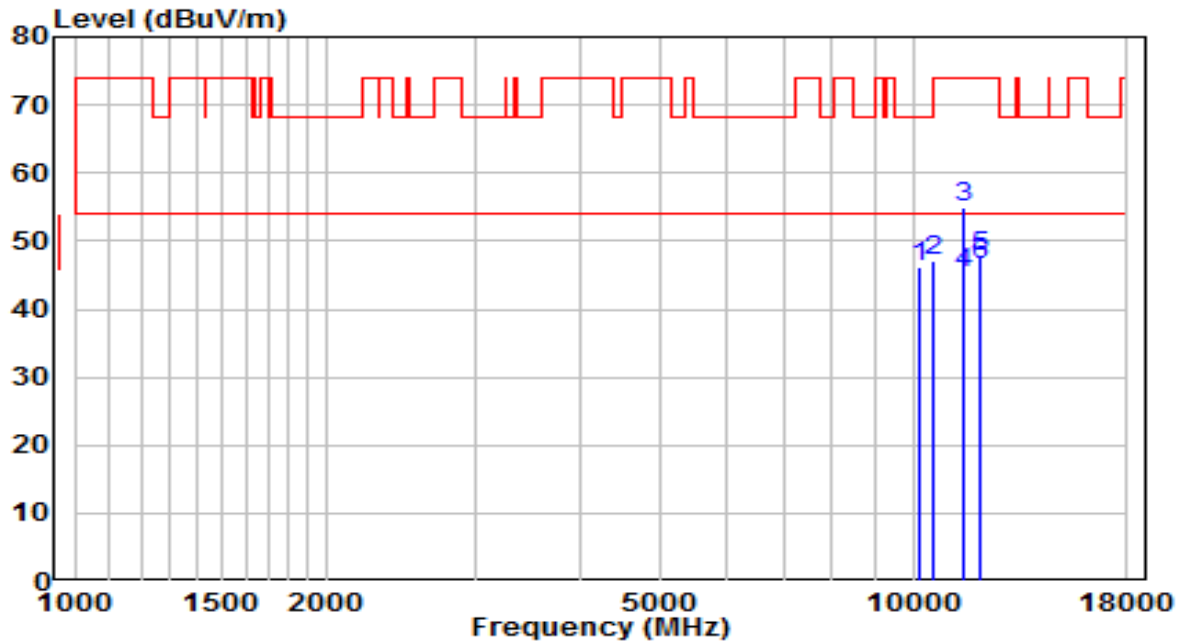


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10180.000       | 28.76          | 17.28      | 46.04                | -22.16      | 68.20          | Peak              |
| 2  | 10596.500       | 28.43          | 18.71      | 47.14                | -21.06      | 68.20          | Peak              |
| 3  | 11446.500       | 34.89          | 19.97      | 54.86                | -19.14      | 74.00          | Peak              |
| 4  | 11446.500       | 25.34          | 19.97      | 45.31                | -8.69       | 54.00          | Average           |
| 5  | 12041.500       | 28.83          | 18.88      | 47.71                | -26.29      | 74.00          | Peak              |
| 6  | * 12041.500     | 27.74          | 18.88      | 46.61                | -7.39       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5745 MHz | Test Voltage         | AC 120V/60Hz |

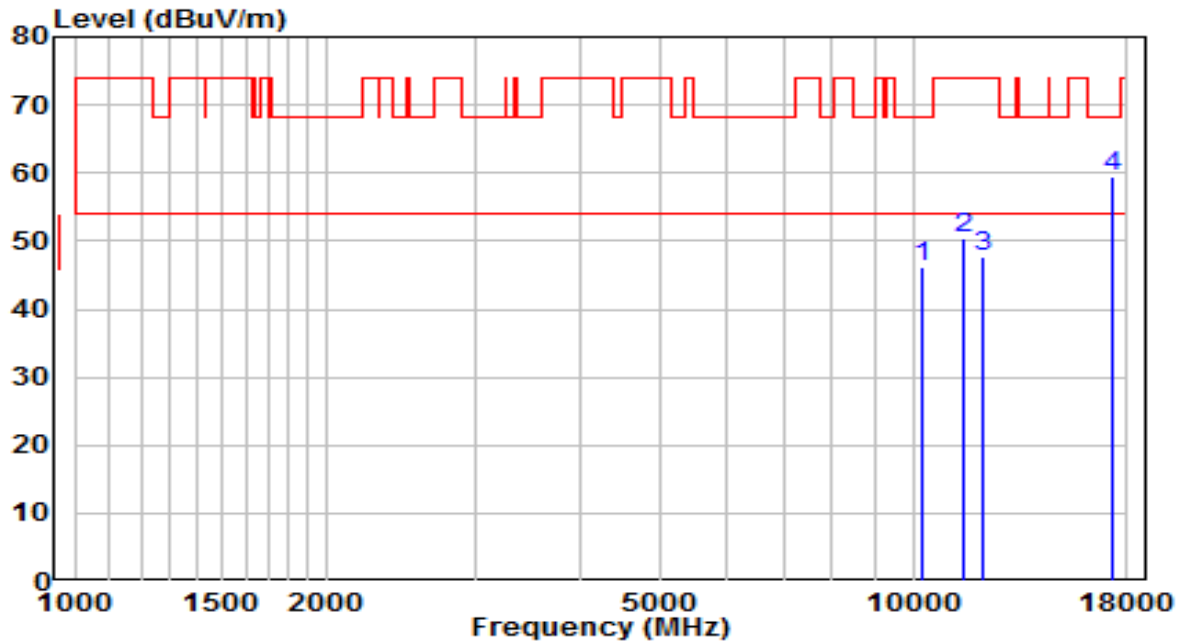


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10273.500       | 28.43          | 17.66      | 46.09                | -22.11      | 68.20          | Peak              |
| 2  | 11497.500       | 30.44          | 20.05      | 50.48                | -23.52      | 74.00          | Peak              |
| 3  | 12084.000       | 28.94          | 18.83      | 47.77                | -26.23      | 74.00          | Peak              |
| 4  | * 17235.000     | 33.26          | 26.08      | 59.33                | -8.87       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5745 MHz | Test Voltage         | AC 120V/60Hz |

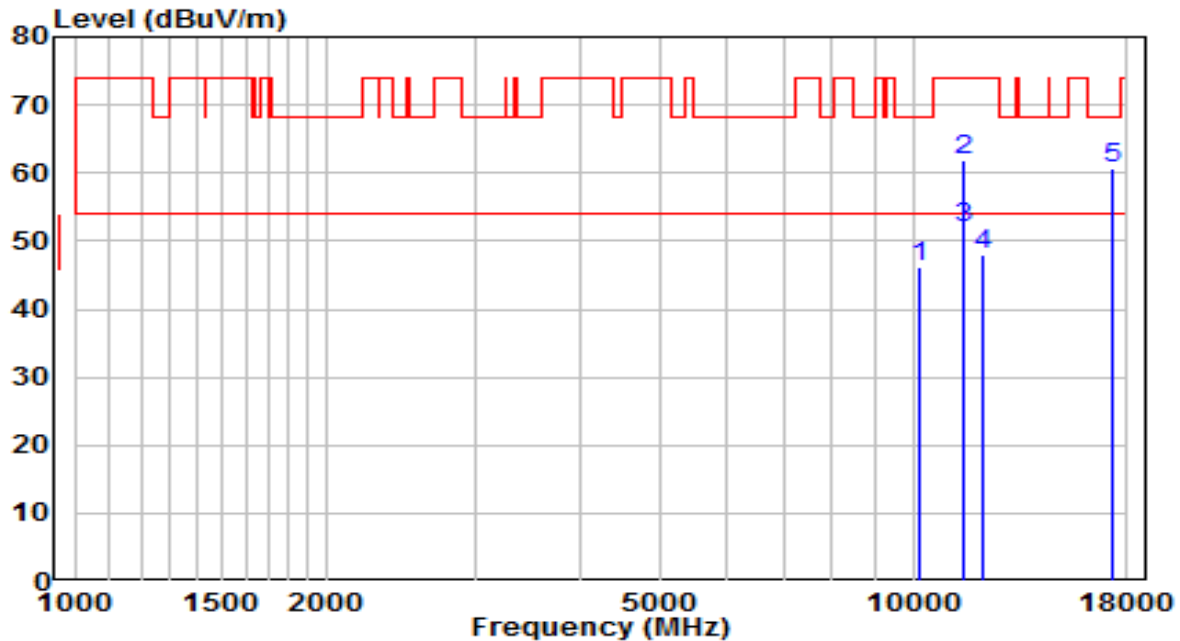


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10163.000       | 28.83          | 17.22      | 46.05                | -22.15      | 68.20          | Peak              |
| 2  | 11489.000       | 41.94          | 20.03      | 61.97                | -12.03      | 74.00          | Peak              |
| 3  | * 11489.000     | 32.00          | 20.03      | 52.04                | -1.96       | 54.00          | Average           |
| 4  | 12118.000       | 29.10          | 18.80      | 47.90                | -26.10      | 74.00          | Peak              |
| 5  | 17243.500       | 34.46          | 26.13      | 60.59                | -7.61       | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5785 MHz | Test Voltage         | AC 120V/60Hz |

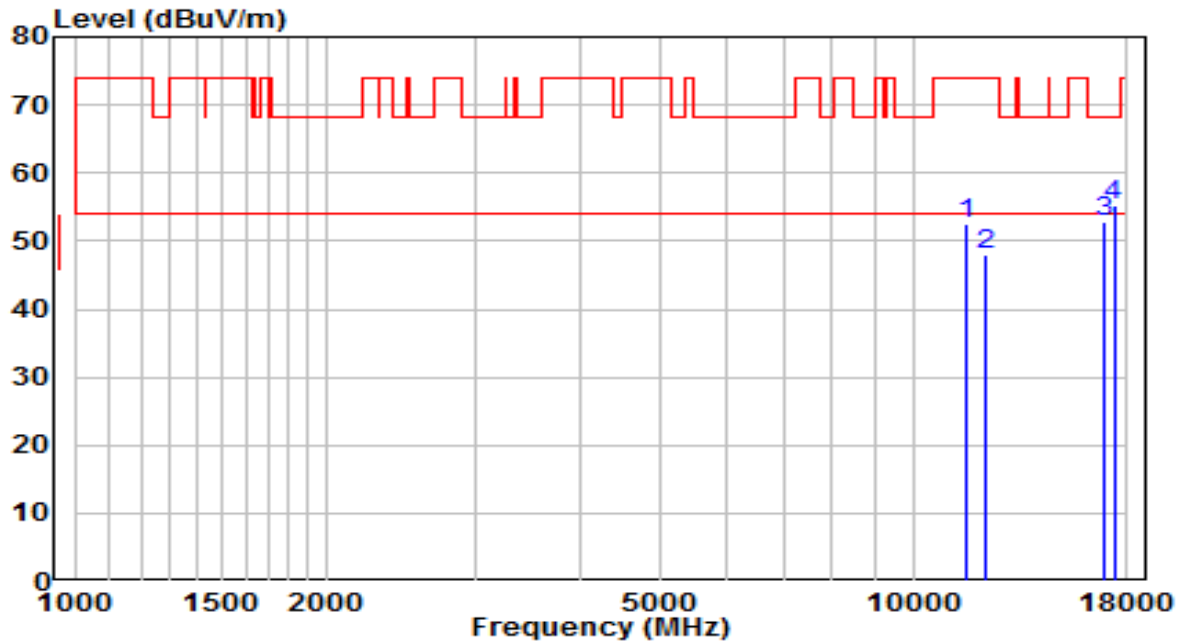


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 11565.500       | 32.48          | 19.90      | 52.38                | -21.62      | 74.00          | Peak              |
| 2  | 12220.000       | 29.39          | 18.69      | 48.08                | -25.92      | 74.00          | Peak              |
| 3  | 16852.500       | 29.37          | 23.55      | 52.92                | -15.28      | 68.20          | Peak              |
| 4  | * 17354.000     | 28.24          | 26.87      | 55.11                | -13.09      | 68.20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5785 MHz | Test Voltage         | AC 120V/60Hz |

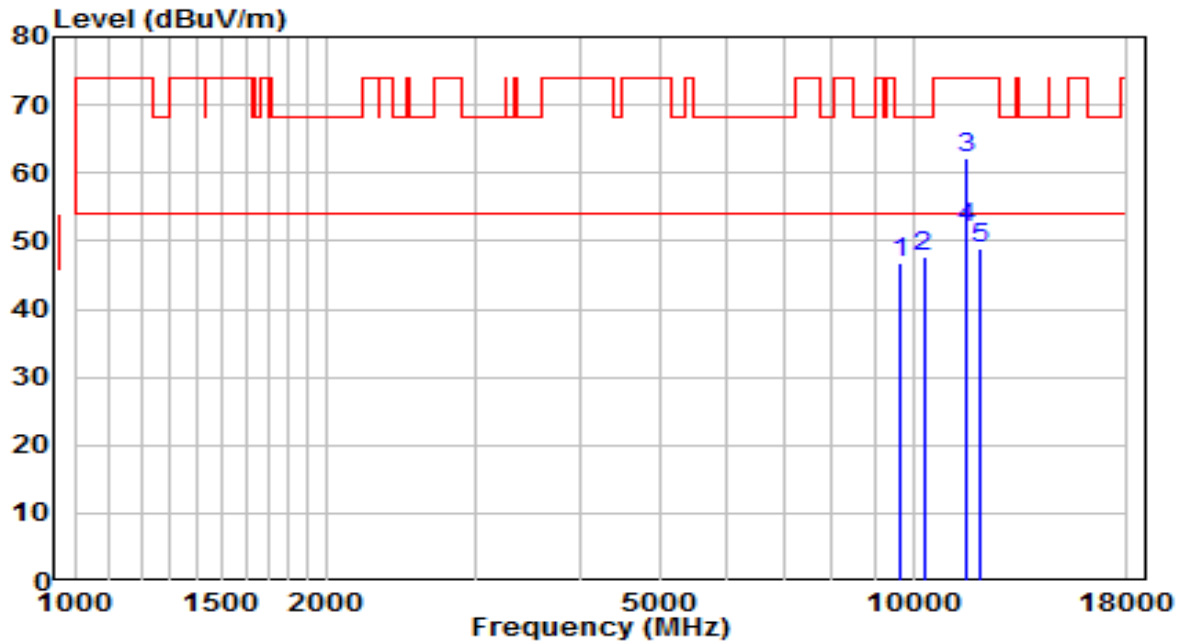


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9670.000        | 30.74          | 16.01      | 46.74                | -21.46      | 68.20          | Peak              |
| 2  | 10290.500       | 29.86          | 17.73      | 47.59                | -20.61      | 68.20          | Peak              |
| 3  | 11574.000       | 42.19          | 19.88      | 62.07                | -11.93      | 74.00          | Peak              |
| 4  | * 11574.000     | 32.06          | 19.88      | 51.95                | -2.05       | 54.00          | Average           |
| 5  | 12016.000       | 29.86          | 18.90      | 48.77                | -25.23      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5825 MHz | Test Voltage         | AC 120V/60Hz |

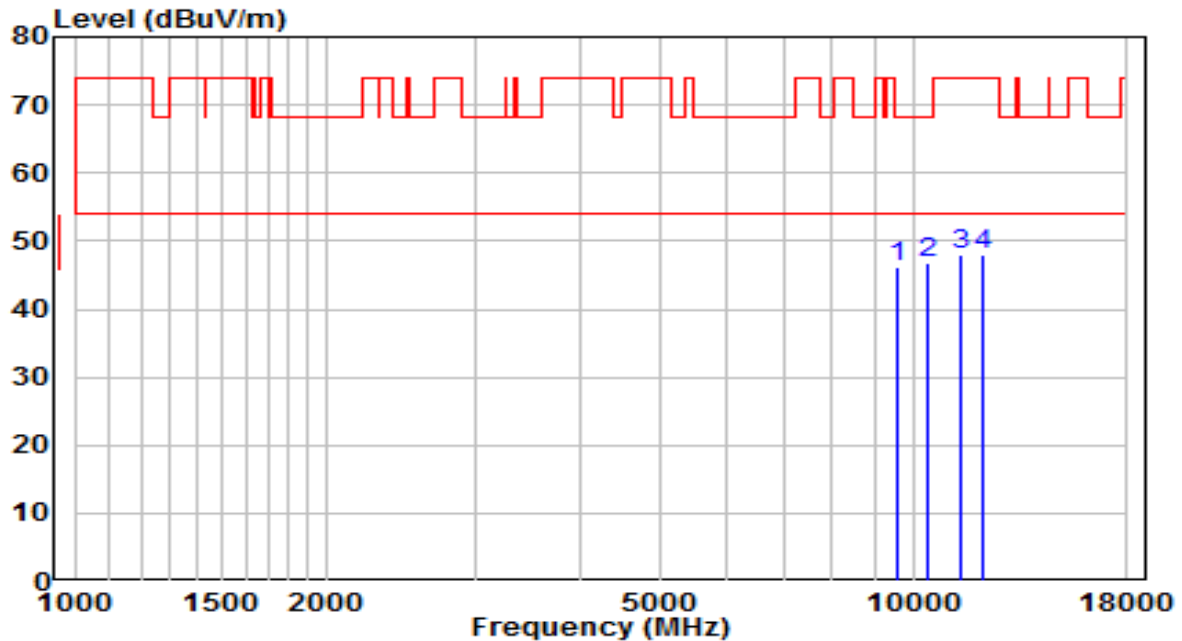


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9602.000        | 30.38          | 15.89      | 46.27                | -21.93      | 68.20          | Peak              |
| 2  | * 10384.000     | 28.82          | 18.10      | 46.92                | -21.28      | 68.20          | Peak              |
| 3  | 11395.500       | 28.02          | 19.89      | 47.91                | -26.09      | 74.00          | Peak              |
| 4  | 12126.500       | 29.29          | 18.79      | 48.08                | -25.92      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE20 at Channel 5825 MHz | Test Voltage         | AC 120V/60Hz |

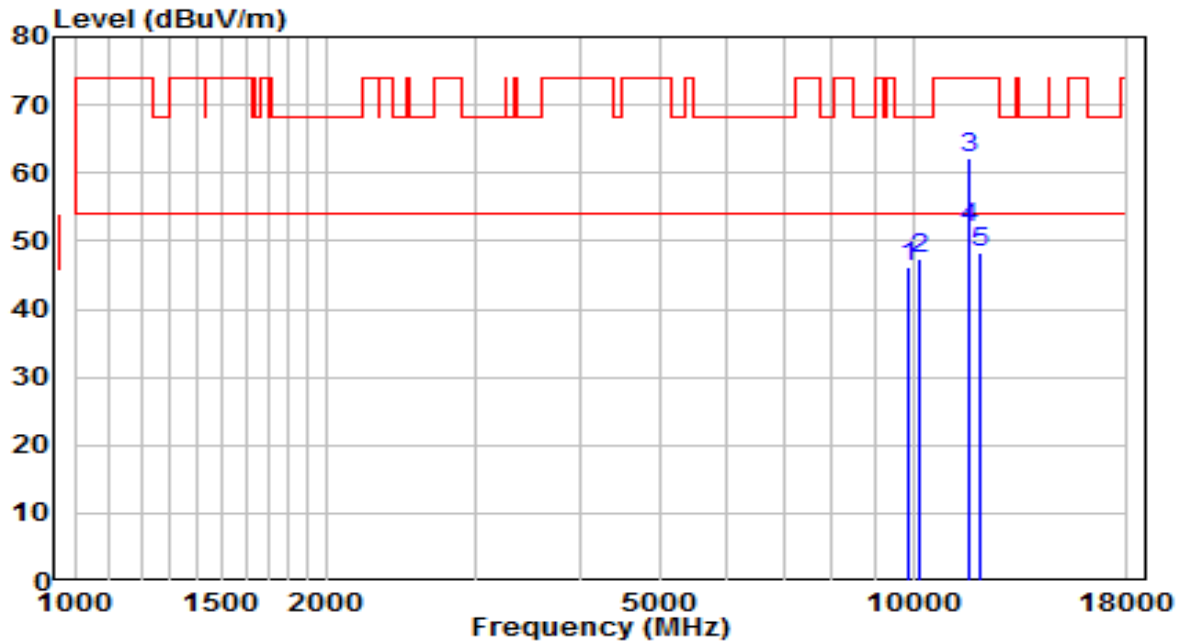


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9891.000        | 29.86          | 16.38      | 46.24                | -21.96      | 68.20          | Peak              |
| 2  | 10205.500       | 29.94          | 17.39      | 47.33                | -20.87      | 68.20          | Peak              |
| 3  | 11650.500       | 42.48          | 19.71      | 62.19                | -11.81      | 74.00          | Peak              |
| 4  | * 11650.500     | 32.25          | 19.71      | 51.96                | -2.04       | 54.00          | Average           |
| 5  | 12041.500       | 29.28          | 18.88      | 48.15                | -25.85      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5190MHz | Test Voltage         | AC 120V/60Hz |

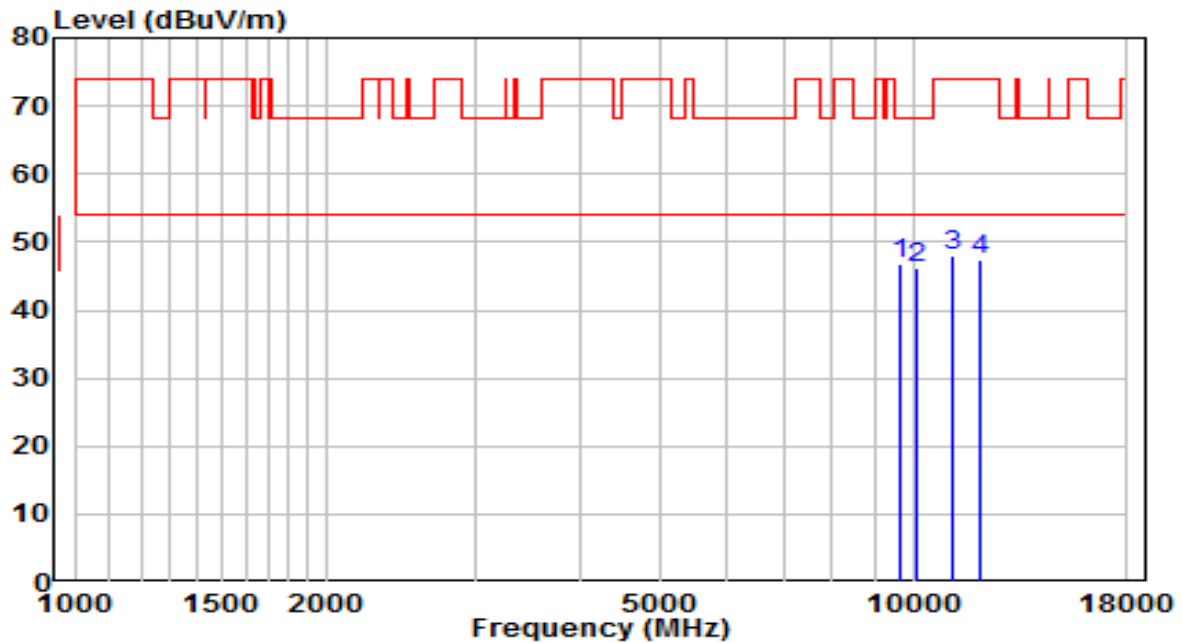


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 9644.500        | 30.78          | 15.96      | 46.74                | -21.46      | 68.20          | Peak              |
| 2  |   | 10103.500       | 29.34          | 16.98      | 46.32                | -21.88      | 68.20          | Peak              |
| 3  |   | 11149.000       | 28.56          | 19.51      | 48.07                | -25.93      | 74.00          | Peak              |
| 4  |   | 12024.500       | 28.42          | 18.89      | 47.32                | -26.68      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5190MHz | Test Voltage         | AC 120V/60Hz |

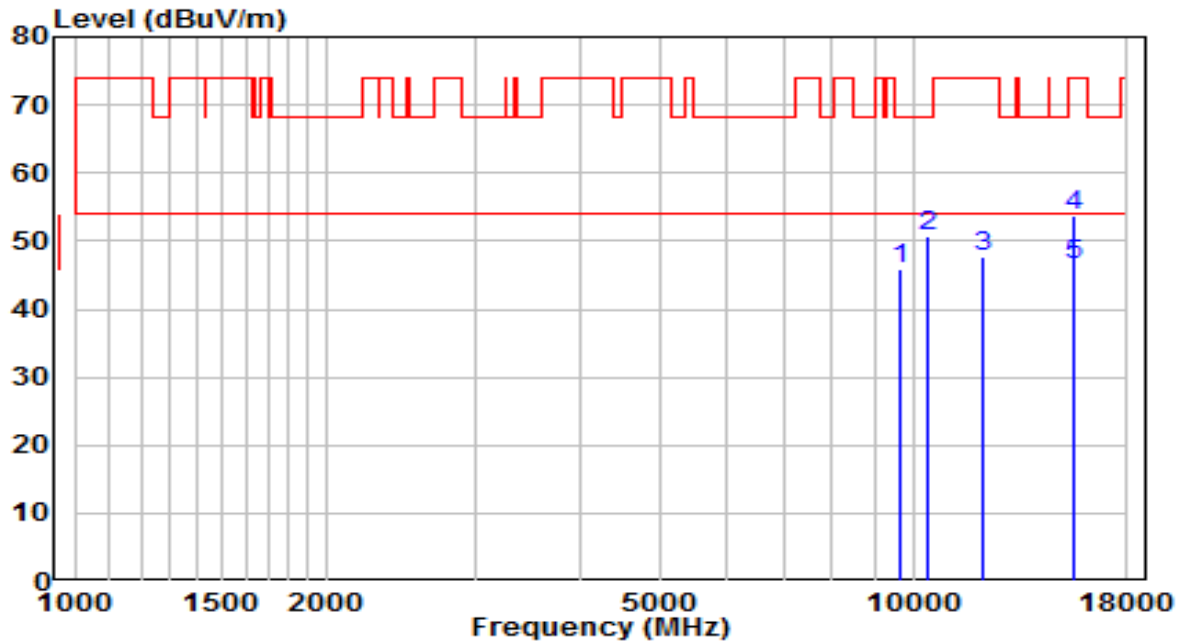


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9670.000        | 29.94          | 16.01      | 45.95                | -22.25      | 68.20          | Peak              |
| 2  | 10375.500       | 32.59          | 18.07      | 50.66                | -17.54      | 68.20          | Peak              |
| 3  | 12118.000       | 28.84          | 18.80      | 47.64                | -26.36      | 74.00          | Peak              |
| 4  | 15569.000       | 32.66          | 21.18      | 53.84                | -20.16      | 74.00          | Peak              |
| 5  | * 15569.000     | 25.34          | 21.18      | 46.52                | -7.48       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5230MHz | Test Voltage         | AC 120V/60Hz |

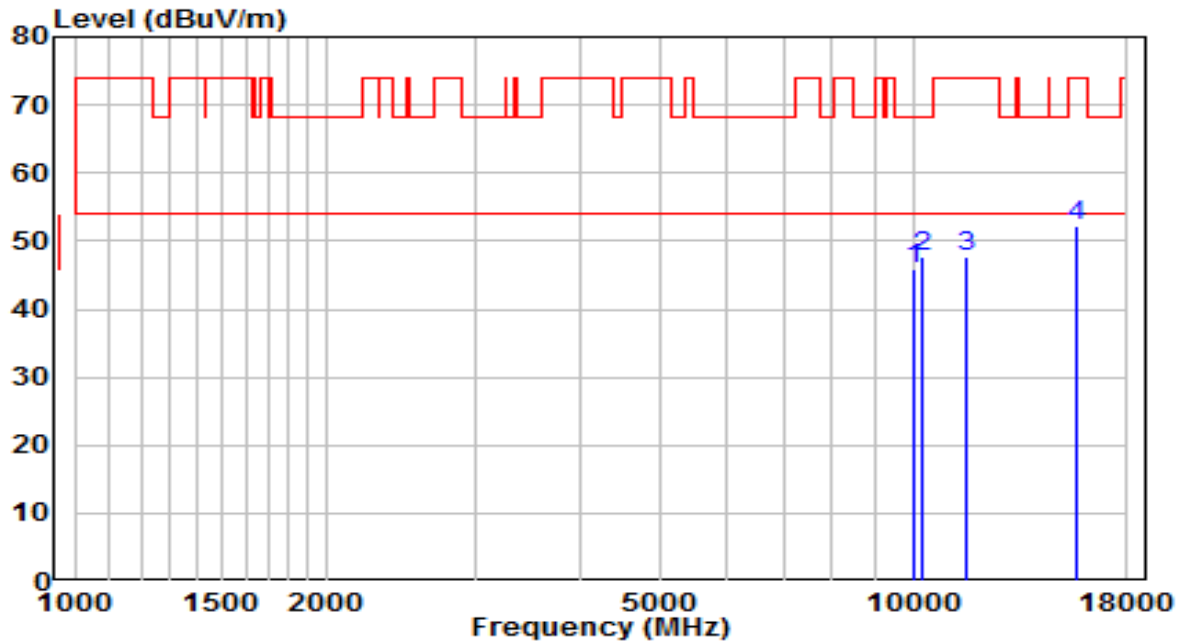


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10027.000       | 29.23          | 16.67      | 45.90                | -22.30      | 68.20          | Peak              |
| 2  | * 10265.000     | 30.17          | 17.63      | 47.80                | -20.40      | 68.20          | Peak              |
| 3  | 11540.000       | 27.66          | 19.96      | 47.62                | -26.38      | 74.00          | Peak              |
| 4  | 15620.000       | 31.13          | 21.05      | 52.18                | -21.82      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5230MHz | Test Voltage         | AC 120V/60Hz |

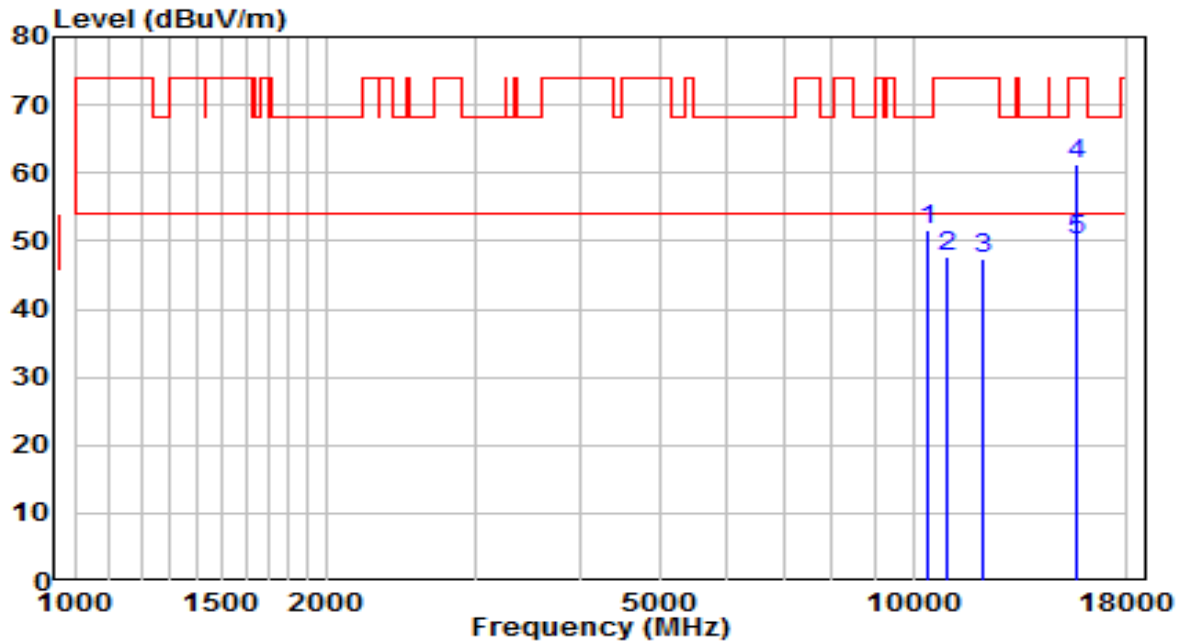


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10435.000       | 33.23          | 18.31      | 51.53                | -16.67      | 68.20          | Peak              |
| 2  | 10996.000       | 28.47          | 19.27      | 47.74                | -26.26      | 74.00          | Peak              |
| 3  | 12075.500       | 28.54          | 18.84      | 47.38                | -26.62      | 74.00          | Peak              |
| 4  | 15637.000       | 40.26          | 21.01      | 61.27                | -12.73      | 74.00          | Peak              |
| 5  | * 15637.000     | 28.96          | 21.01      | 49.97                | -4.03       | 54.00          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5270 MHz | Test Voltage         | AC 120V/60Hz |

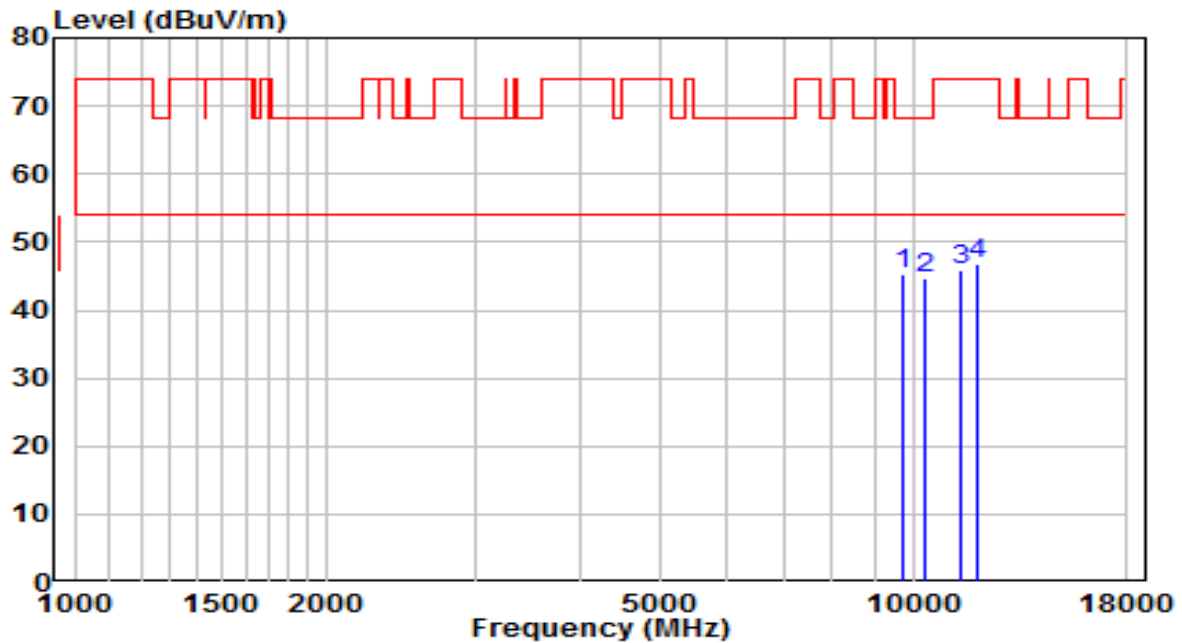


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 9738.000        | 29.27          | 16.12      | 45.39                | -22.81      | 68.20          | Peak              |
| 2  |   | 10299.000       | 27.04          | 17.76      | 44.80                | -23.40      | 68.20          | Peak              |
| 3  |   | 11395.500       | 25.94          | 19.89      | 45.83                | -28.17      | 74.00          | Peak              |
| 4  |   | 11948.000       | 27.90          | 19.04      | 46.94                | -27.06      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5270 MHz | Test Voltage         | AC 120V/60Hz |

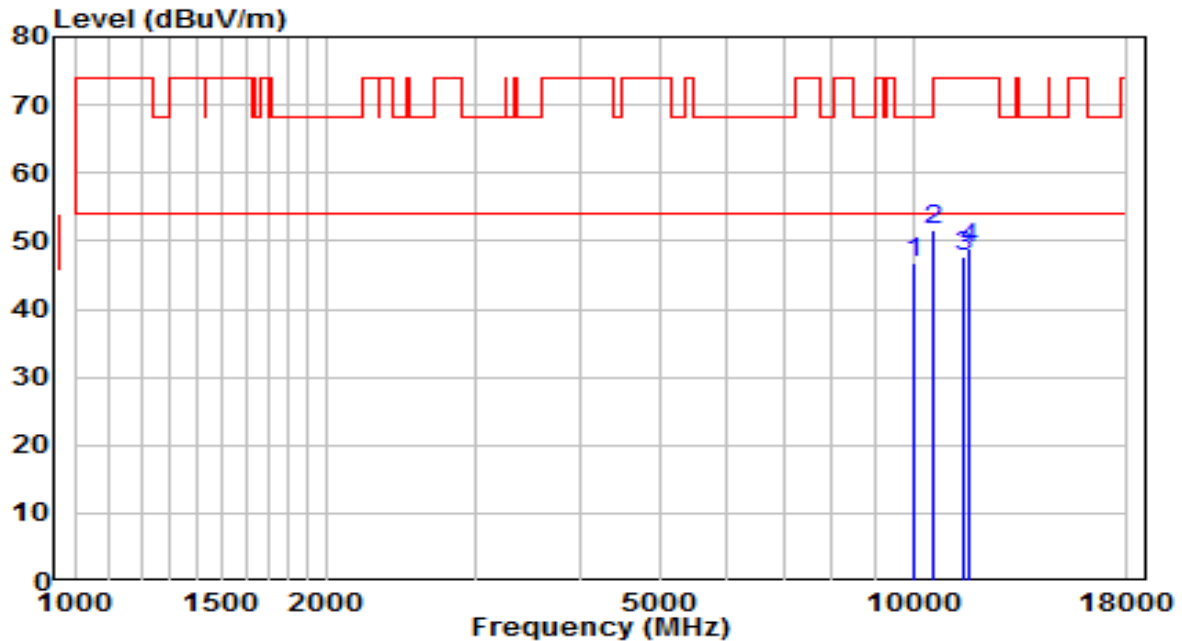


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10010.000       | 30.05          | 16.60      | 46.65                | -21.55      | 68.20          | Peak              |
| 2  | * 10545.500     | 33.02          | 18.63      | 51.66                | -16.54      | 68.20          | Peak              |
| 3  | 11472.000       | 27.79          | 20.01      | 47.80                | -26.20      | 74.00          | Peak              |
| 4  | 11667.500       | 29.20          | 19.67      | 48.87                | -25.13      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5310 MHz | Test Voltage         | AC 120V/60Hz |

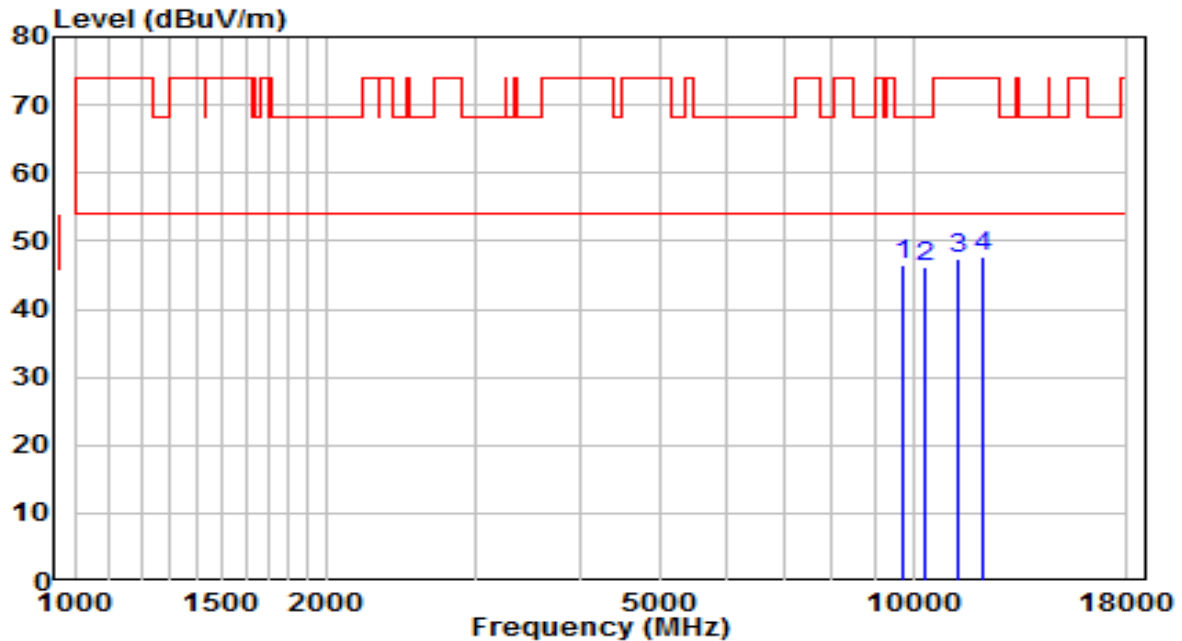


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 9738.000        | 30.29          | 16.12      | 46.41                | -21.79      | 68.20          | Peak              |
| 2  |   | 10324.500       | 28.46          | 17.86      | 46.33                | -21.87      | 68.20          | Peak              |
| 3  |   | 11327.500       | 27.53          | 19.78      | 47.32                | -26.68      | 74.00          | Peak              |
| 4  |   | 12126.500       | 28.98          | 18.79      | 47.77                | -26.23      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5310 MHz | Test Voltage         | AC 120V/60Hz |

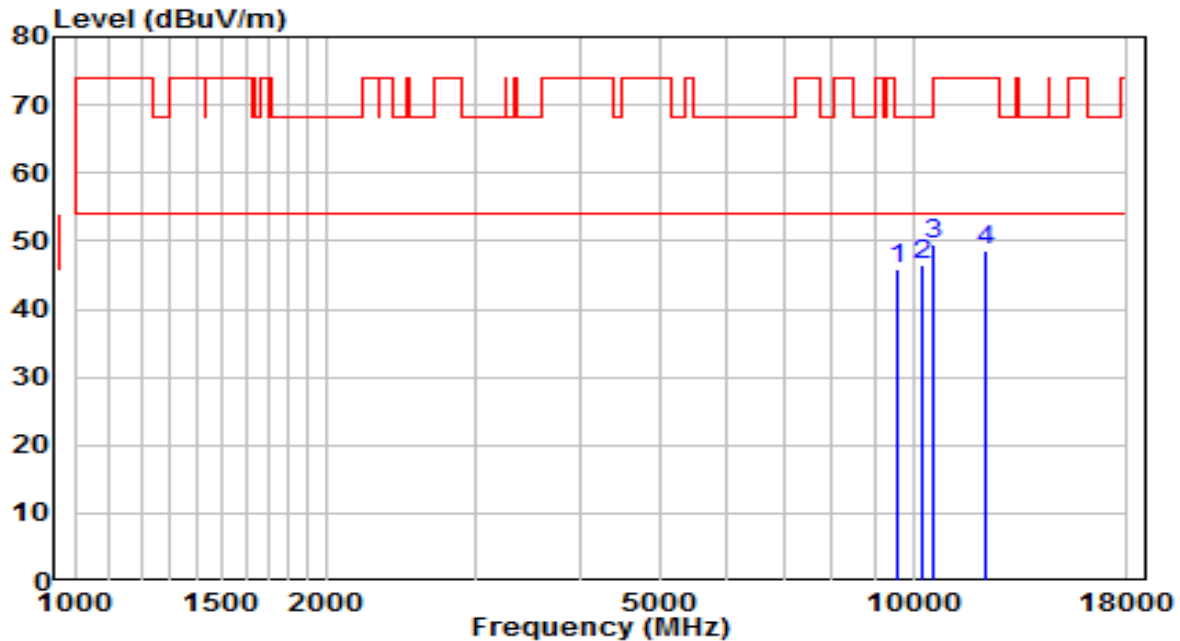


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9593.500        | 29.99          | 15.88      | 45.87                | -22.33      | 68.20          | Peak              |
| 2  | * 10256.500     | 29.04          | 17.59      | 46.64                | -21.56      | 68.20          | Peak              |
| 3  | 10605.000       | 30.69          | 18.72      | 49.41                | -24.59      | 74.00          | Peak              |
| 4  | 12211.500       | 29.81          | 18.70      | 48.51                | -25.49      | 74.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |              |
|-----------|--------------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                    | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                       | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5510<br>MHz | Test Voltage         | AC 120V/60Hz |

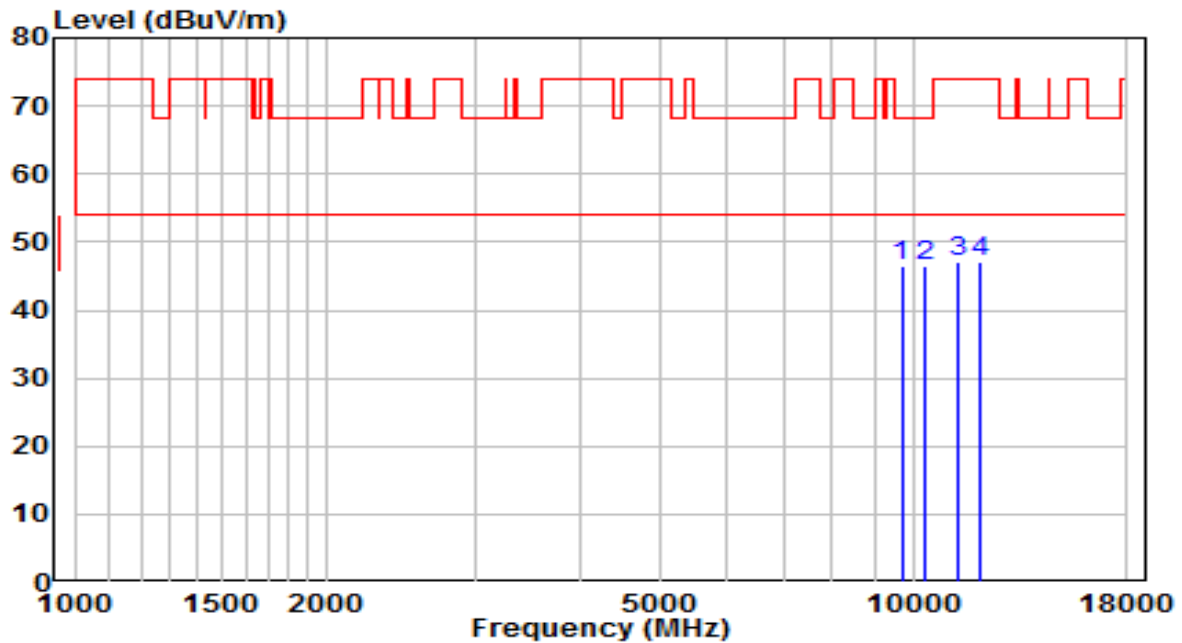


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9687.000        | 30.35          | 16.03      | 46.38                | -21.82      | 68.20          | Peak              |
| 2  | * 10307.500     | 28.64          | 17.80      | 46.44                | -21.76      | 68.20          | Peak              |
| 3  | 11276.500       | 27.31          | 19.71      | 47.02                | -26.98      | 74.00          | Peak              |
| 4  | 12058.500       | 28.09          | 18.86      | 46.95                | -27.05      | 74.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5510 MHz | Test Voltage         | AC 120V/60Hz |

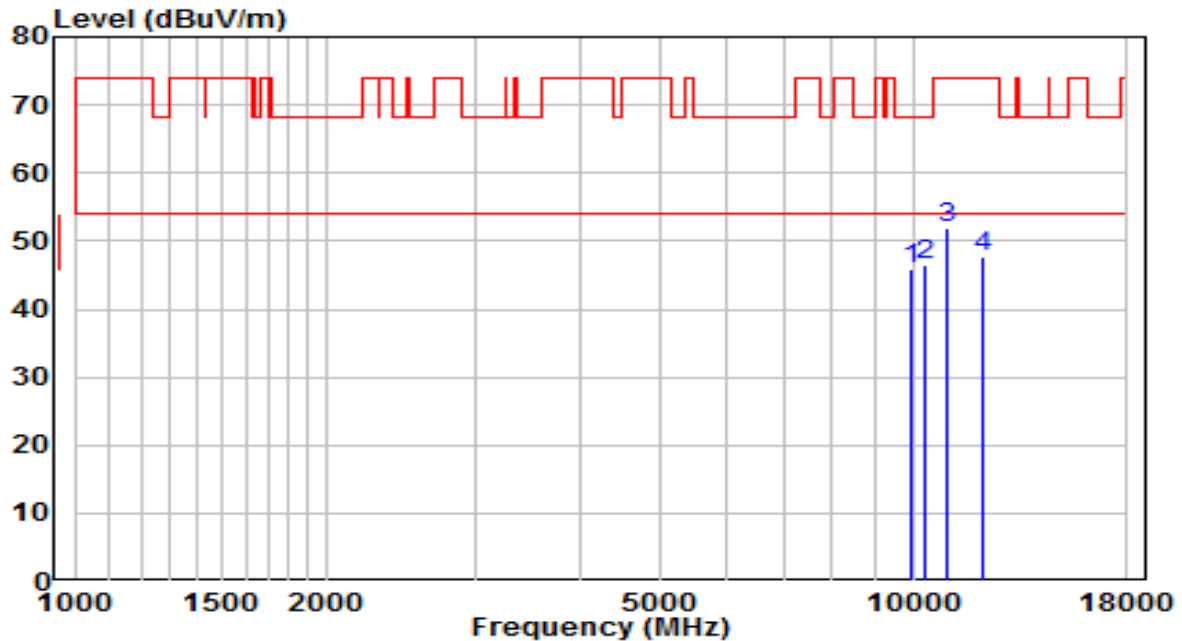


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9959.000        | 29.37          | 16.49      | 45.86                | -22.34      | 68.20          | Peak              |
| 2  | * 10307.500     | 28.69          | 17.80      | 46.48                | -21.72      | 68.20          | Peak              |
| 3  | 11004.500       | 32.64          | 19.29      | 51.93                | -22.07      | 74.00          | Peak              |
| 4  | 12084.000       | 28.77          | 18.83      | 47.60                | -26.40      | 74.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5550 MHz | Test Voltage         | AC 120V/60Hz |

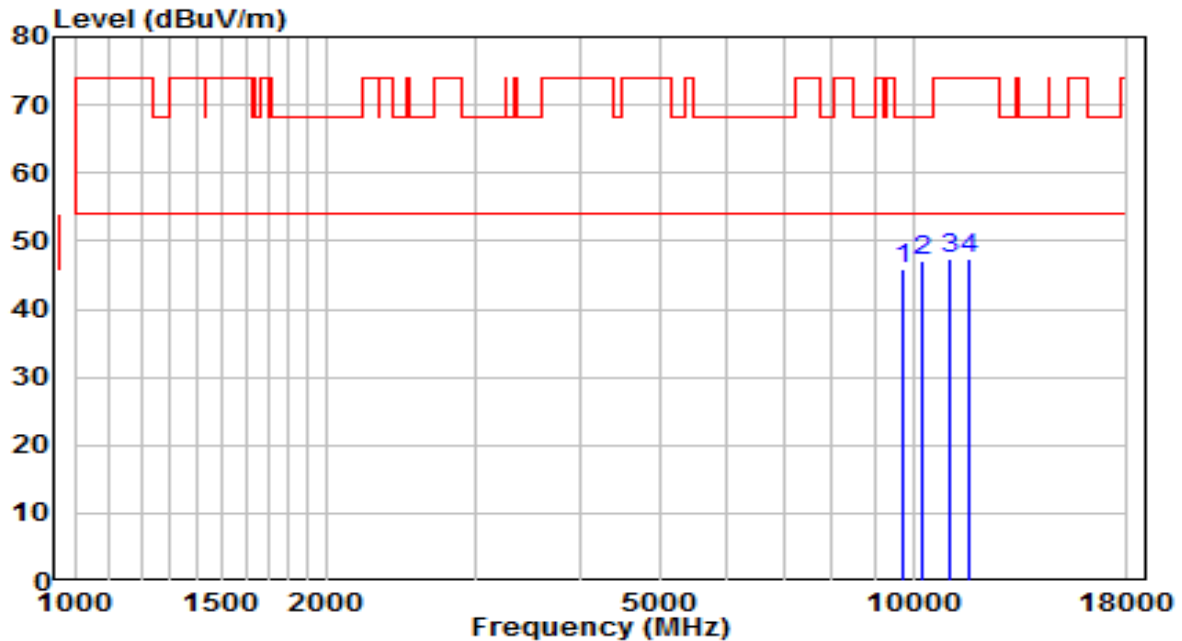


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9695.500        | 29.91          | 16.05      | 45.96                | -22.24      | 68.20          | Peak              |
| 2  | * 10273.500     | 29.54          | 17.66      | 47.20                | -21.00      | 68.20          | Peak              |
| 3  | 11064.000       | 27.97          | 19.38      | 47.35                | -26.65      | 74.00          | Peak              |
| 4  | 11659.000       | 27.79          | 19.69      | 47.49                | -26.51      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5550 MHz | Test Voltage         | AC 120V/60Hz |

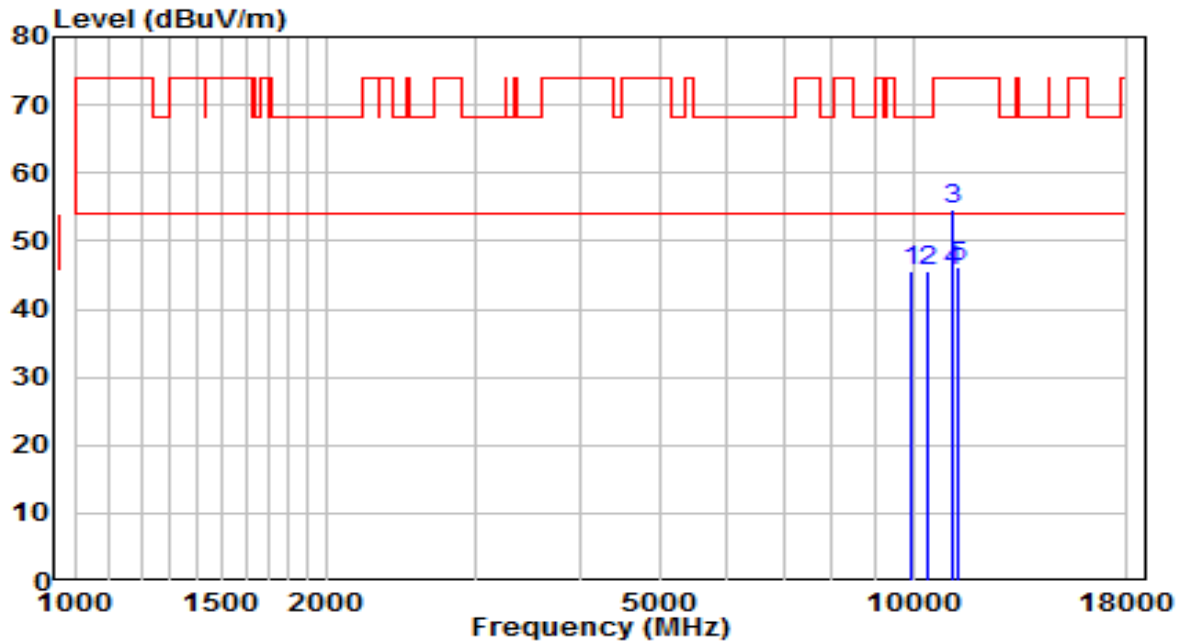


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9942.000        | 29.09          | 16.46      | 45.55                | -22.65      | 68.20          | Peak              |
| 2  | 10392.500       | 27.52          | 18.14      | 45.66                | -22.54      | 68.20          | Peak              |
| 3  | 11106.500       | 35.33          | 19.44      | 54.77                | -19.23      | 74.00          | Peak              |
| 4  | * 11106.500     | 26.23          | 19.44      | 45.67                | -8.33       | 54.00          | Average           |
| 5  | 11276.500       | 26.53          | 19.71      | 46.24                | -27.76      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |              |
|-----------|--------------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                    | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                       | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5670<br>MHz | Test Voltage         | AC 120V/60Hz |

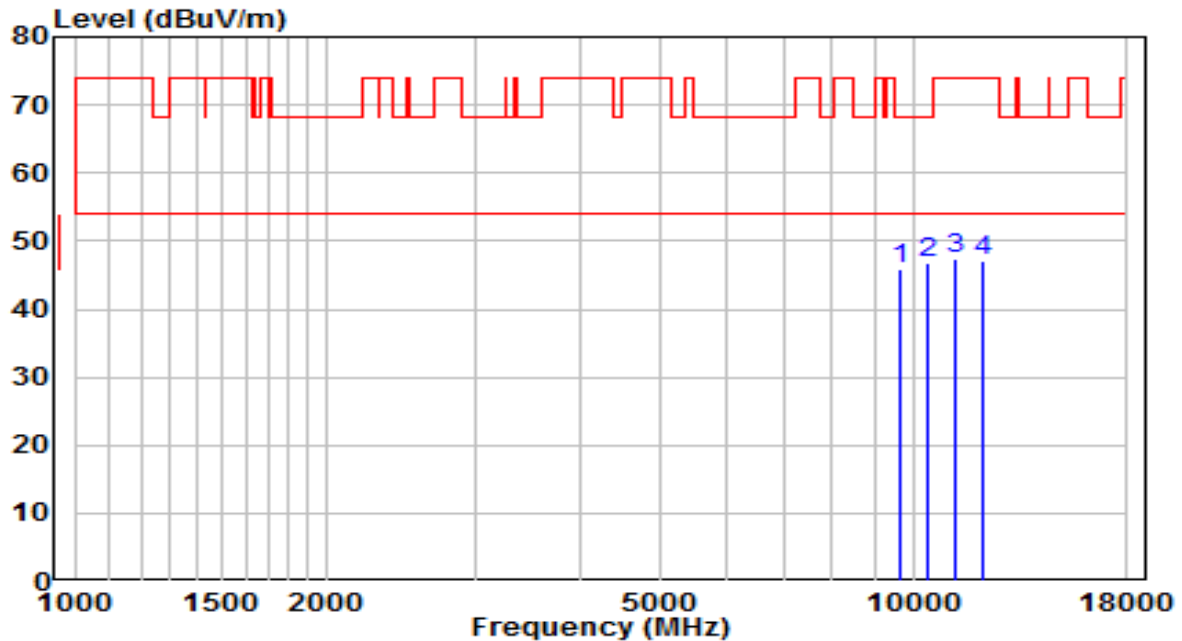


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9636.000        | 29.91          | 15.95      | 45.86                | -22.34      | 68.20          | Peak              |
| 2  | * 10375.500     | 28.66          | 18.07      | 46.73                | -21.47      | 68.20          | Peak              |
| 3  | 11251.000       | 27.60          | 19.67      | 47.27                | -26.73      | 74.00          | Peak              |
| 4  | 12075.500       | 28.11          | 18.84      | 46.96                | -27.04      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |              |
|-----------|--------------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                    | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                       | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                         | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5670<br>MHz | Test Voltage         | AC 120V/60Hz |

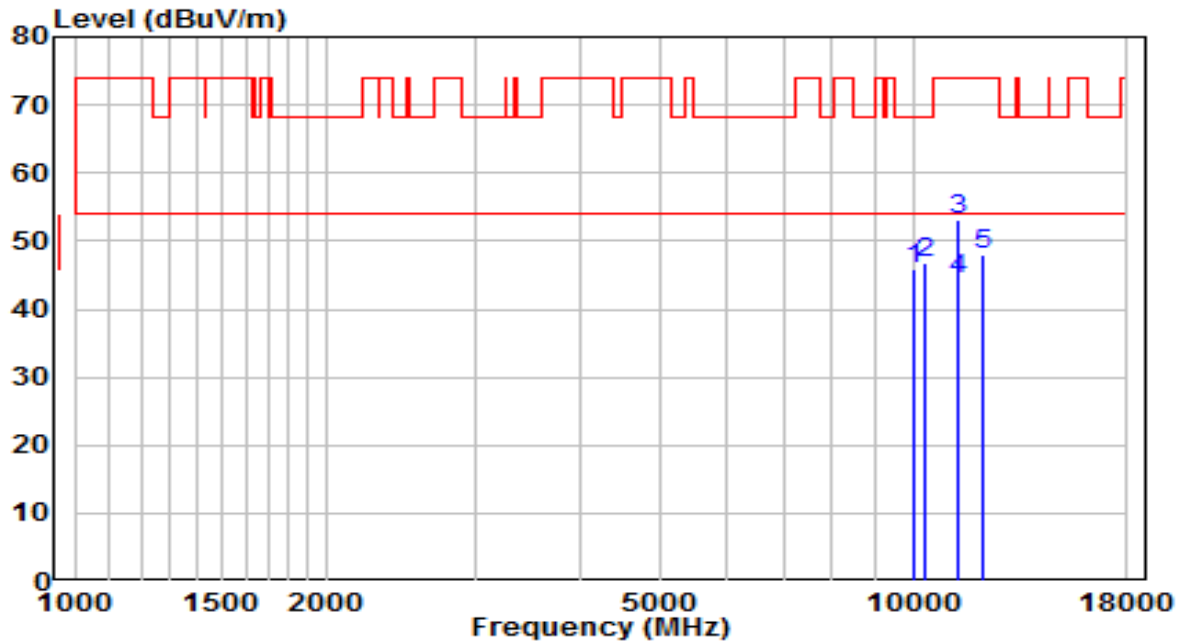


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 10018.500       | 29.29          | 16.63      | 45.93                | -22.27      | 68.20          | Peak              |
| 2  | 10299.000       | 29.10          | 17.76      | 46.86                | -21.34      | 68.20          | Peak              |
| 3  | 11344.500       | 33.36          | 19.81      | 53.17                | -20.83      | 74.00          | Peak              |
| 4  | * 11344.500     | 24.68          | 19.81      | 44.49                | -9.51       | 54.00          | Average           |
| 5  | 12101.000       | 29.30          | 18.82      | 48.11                | -25.89      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                                  |                      |              |
|-----------|--------------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                    | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                       | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                       | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5710<br>MHz | Test Voltage         | AC 120V/60Hz |

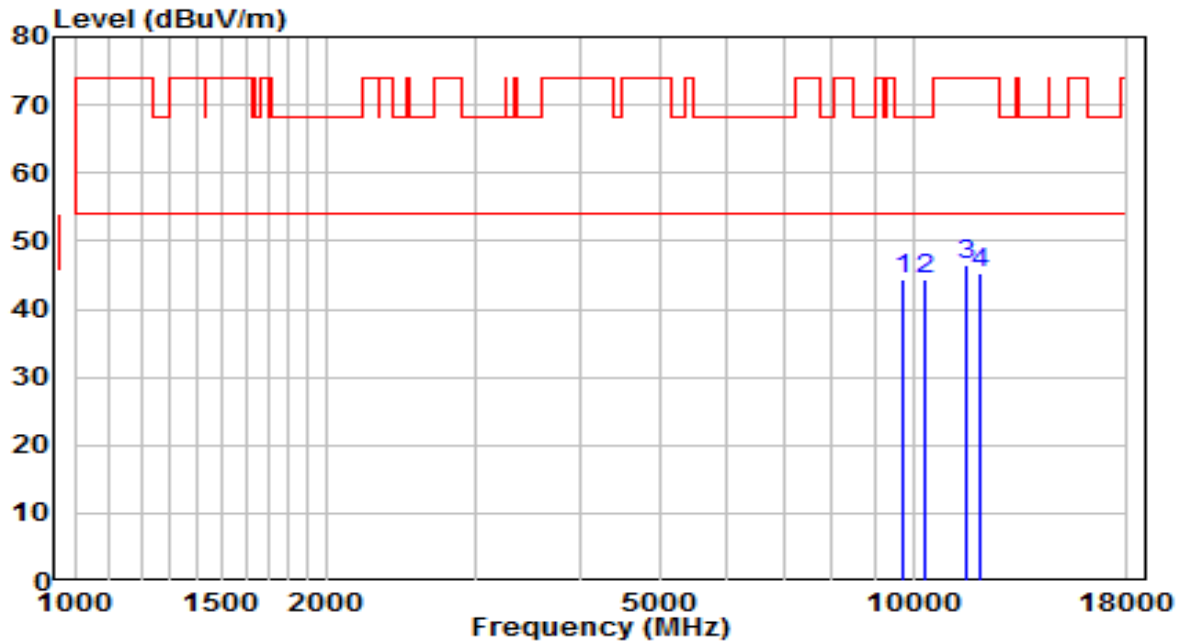


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 9738.000        | 28.37          | 16.12      | 44.49                | -23.71      | 68.20          | Peak              |
| 2  |   | 10324.500       | 26.52          | 17.86      | 44.38                | -23.82      | 68.20          | Peak              |
| 3  |   | 11599.500       | 26.65          | 19.83      | 46.47                | -27.53      | 74.00          | Peak              |
| 4  |   | 11999.000       | 26.24          | 18.92      | 45.17                | -28.83      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5710 MHz | Test Voltage         | AC 120V/60Hz |

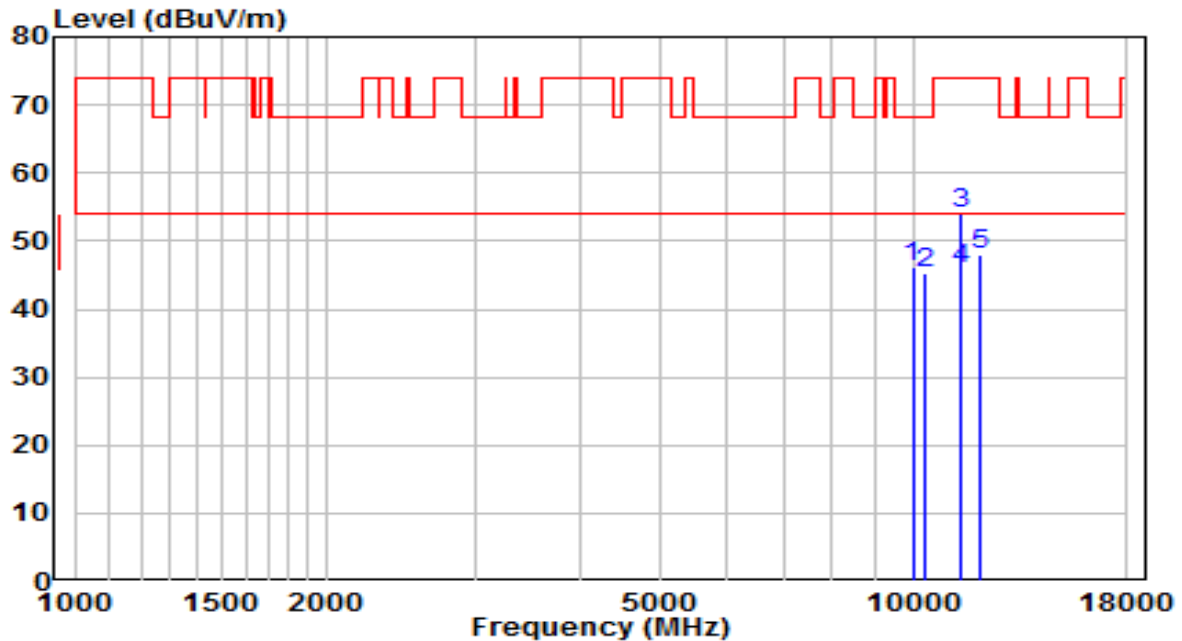


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9984.500        | 29.79          | 16.53      | 46.32                | -21.88      | 68.20          | Peak              |
| 2  | 10299.000       | 27.43          | 17.76      | 45.19                | -23.01      | 68.20          | Peak              |
| 3  | 11412.500       | 33.97          | 19.92      | 53.89                | -20.11      | 74.00          | Peak              |
| 4  | * 11412.500     | 25.85          | 19.92      | 45.76                | -8.24       | 54.00          | Average           |
| 5  | 12033.000       | 29.22          | 18.89      | 48.10                | -25.90      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5755 MHz | Test Voltage         | AC 120V/60Hz |

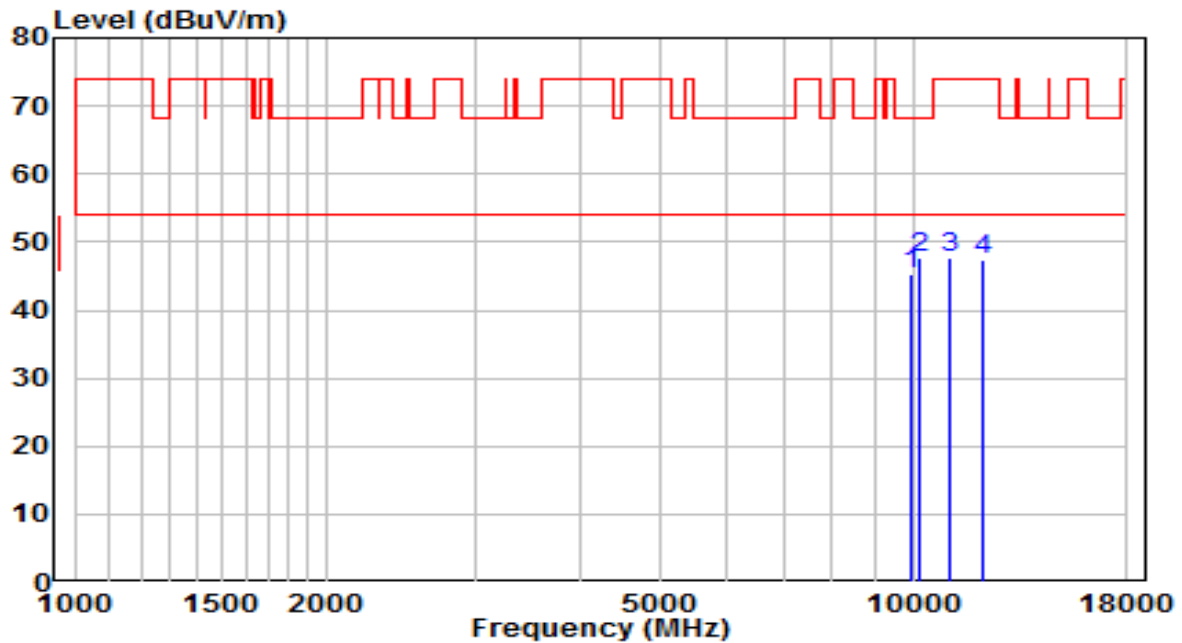


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9933.500        | 28.88          | 16.45      | 45.32                | -22.88      | 68.20          | Peak              |
| 2  | * 10197.000     | 30.22          | 17.35      | 47.57                | -20.63      | 68.20          | Peak              |
| 3  | 11072.500       | 28.30          | 19.39      | 47.69                | -26.31      | 74.00          | Peak              |
| 4  | 12135.000       | 28.67          | 18.78      | 47.45                | -26.55      | 74.00          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
- Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                               |                      |              |
|-----------|-----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                 | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                    | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                      | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5755 MHz | Test Voltage         | AC 120V/60Hz |

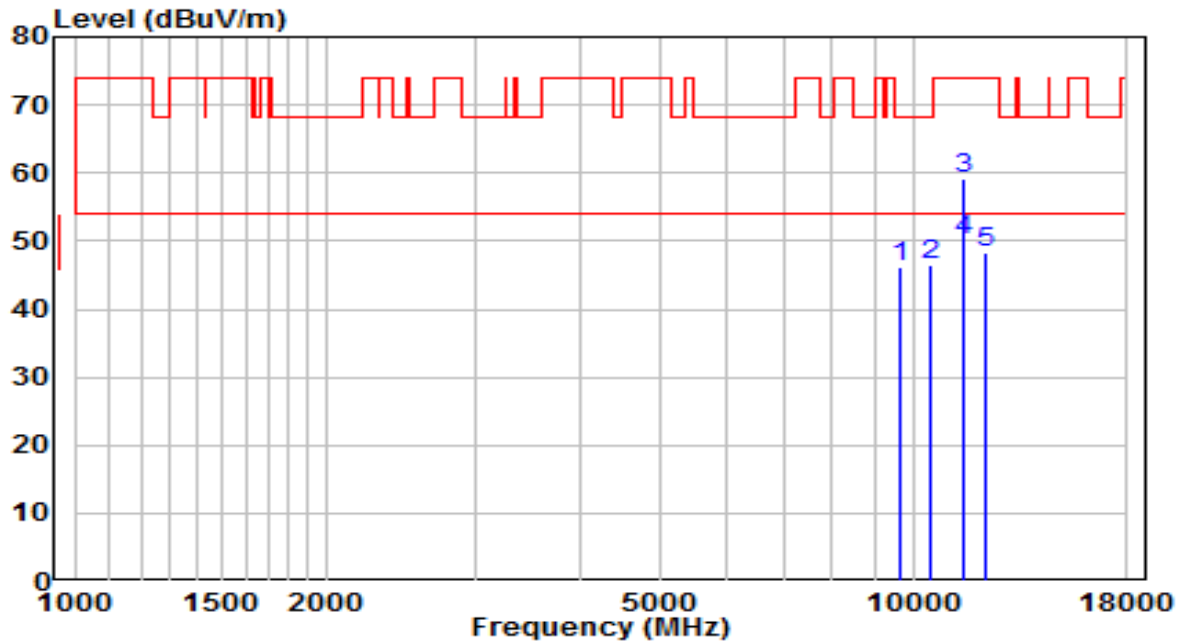


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9636.000        | 30.11          | 15.95      | 46.06                | -22.14      | 68.20          | Peak              |
| 2  | 10477.500       | 27.87          | 18.48      | 46.35                | -21.85      | 68.20          | Peak              |
| 3  | 11514.500       | 39.08          | 20.02      | 59.10                | -14.90      | 74.00          | Peak              |
| 4  | * 11514.500     | 29.97          | 20.02      | 49.99                | -4.01       | 54.00          | Average           |
| 5  | 12186.000       | 29.58          | 18.73      | 48.31                | -25.69      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5795MHz | Test Voltage         | AC 120V/60Hz |

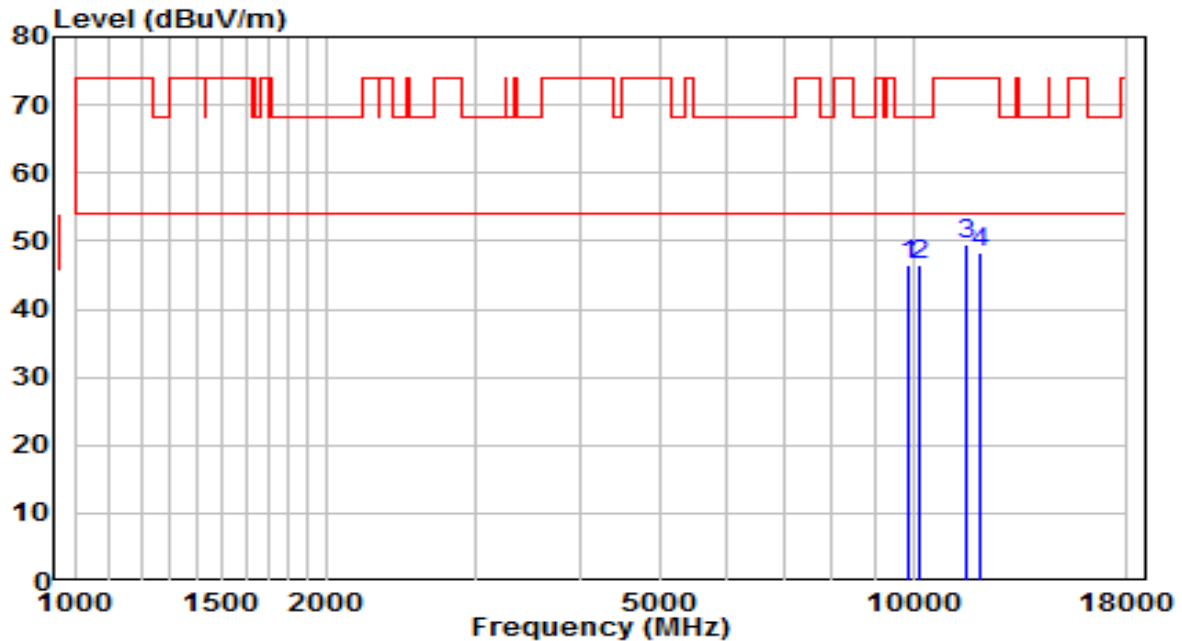


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | * | 9899.500        | 30.24          | 16.39      | 46.63                | -21.57      | 68.20          | Peak              |
| 2  |   | 10188.500       | 29.10          | 17.32      | 46.42                | -21.78      | 68.20          | Peak              |
| 3  |   | 11591.000       | 29.81          | 19.84      | 49.66                | -24.34      | 74.00          | Peak              |
| 4  |   | 12058.500       | 29.48          | 18.86      | 48.34                | -25.66      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE40 at Channel 5795MHz | Test Voltage         | AC 120V/60Hz |

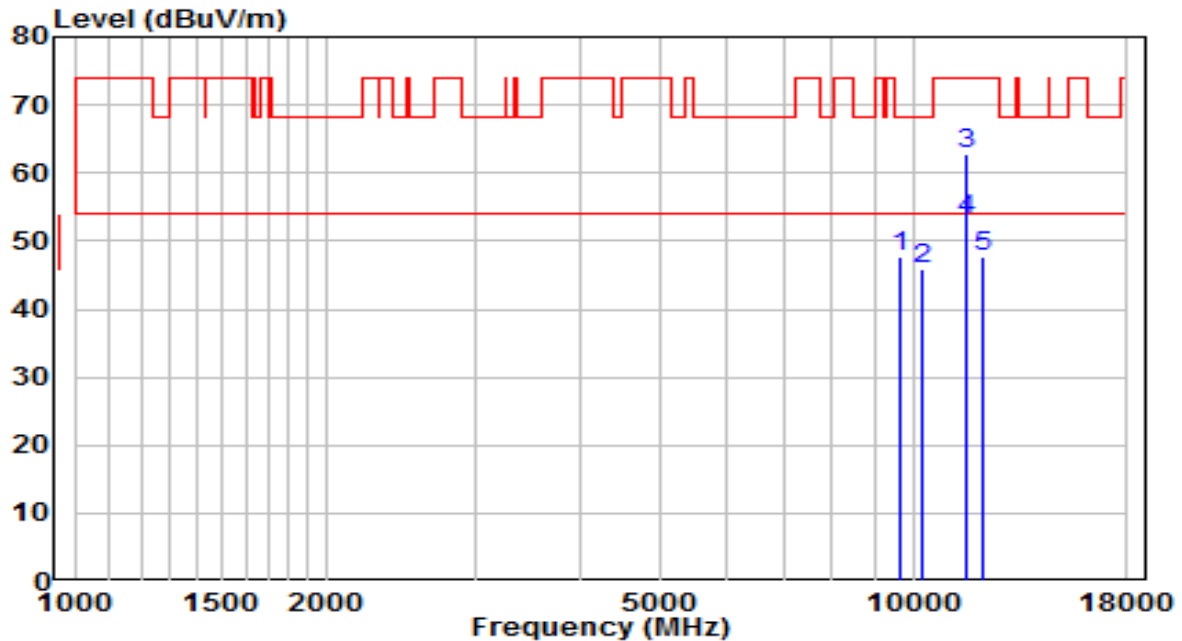


| No  | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|-----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1   | 9678.500        | 31.79          | 16.02      | 47.81                | -20.39      | 68.20          | Peak              |
| 2   | 10239.500       | 28.39          | 17.52      | 45.91                | -22.29      | 68.20          | Peak              |
| 3   | 11591.000       | 43.06          | 19.84      | 62.91                | -11.09      | 74.00          | Peak              |
| 4 * | 11591.000       | 33.16          | 19.84      | 53.00                | -1.00       | 54.00          | Average           |
| 5   | 12092.500       | 28.97          | 18.82      | 47.79                | -26.21      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5210MHz | Test Voltage         | AC 120V/60Hz |

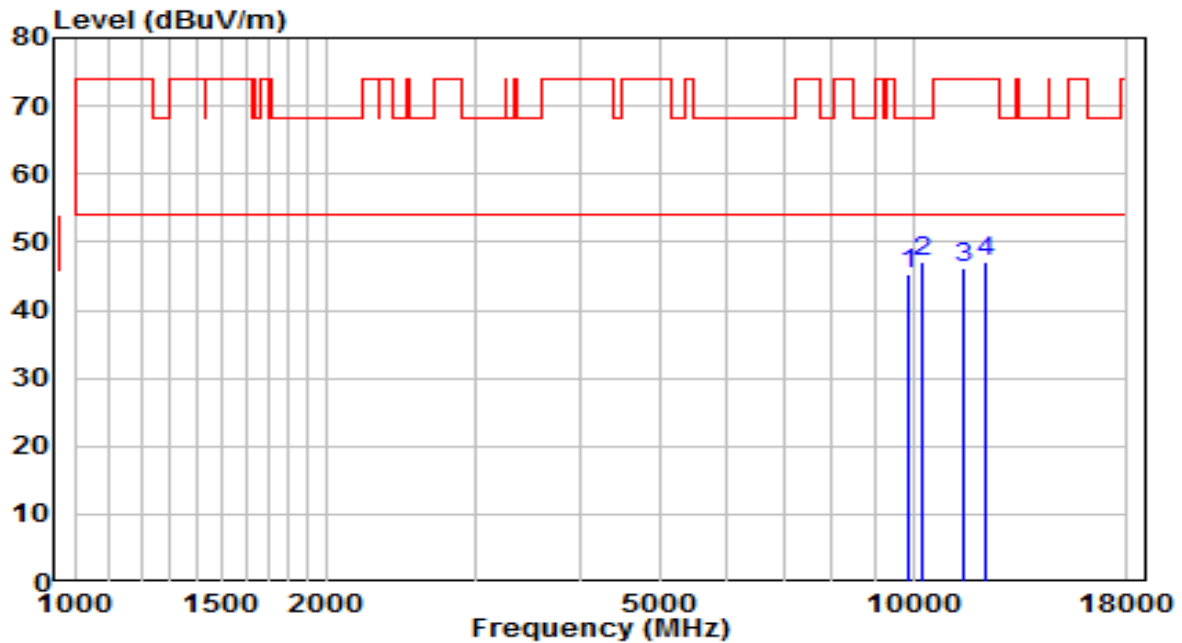


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9882.500        | 28.95          | 16.36      | 45.32                | -22.88      | 68.20          | Peak              |
| 2  | * 10265.000     | 29.35          | 17.63      | 46.98                | -21.22      | 68.20          | Peak              |
| 3  | 11463.500       | 26.23          | 19.99      | 46.22                | -27.78      | 74.00          | Peak              |
| 4  | 12194.500       | 28.23          | 18.72      | 46.95                | -27.05      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- 4.The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |              |
|-----------|----------------------------------------------|----------------------|--------------|
| EUT       | AX3000 Gigabit Wi-Fi 6 Router                | Date of Test         | 2021-12-27   |
| Factor    | BBHA 9120D                                   | Temp. / Humidity     | 22.2°C/38.5% |
| Polarity  | Vertical                                     | Site / Test Engineer | AC1 / Jay    |
| Test Mode | Transmit by 802.11ax-HE80 at Channel 5210MHz | Test Voltage         | AC 120V/60Hz |

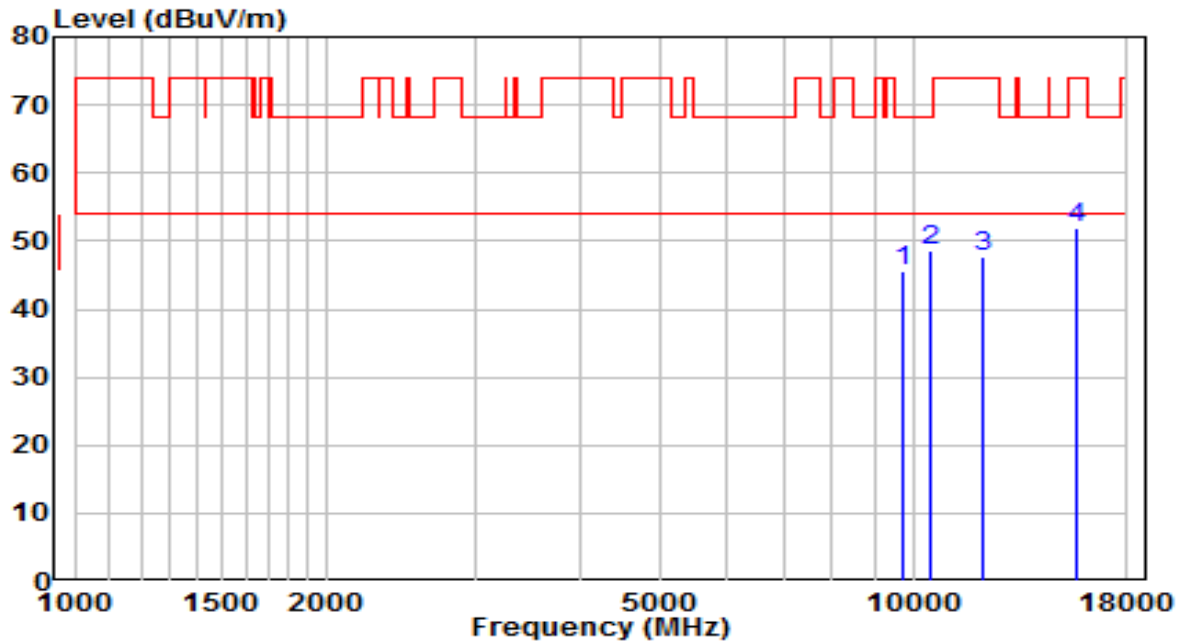

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------------|
| 1  | 9729.500        | 29.58          | 16.11      | 45.68                | -22.52      | 68.20          | Peak              |
| 2  | * 10477.500     | 30.15          | 18.48      | 48.63                | -19.57      | 68.20          | Peak              |
| 3  | 12092.500       | 28.74          | 18.82      | 47.57                | -26.43      | 74.00          | Peak              |
| 4  | 15611.500       | 30.71          | 21.07      | 51.78                | -22.22      | 74.00          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB)– Preamplifier(dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.