



# FCC Radio Test Report

## FCC ID: 2BH7FAX53

**This report concerns: Class II Permissive Change**

**Project No.** : 2504G012  
**Equipment** : 1) AX3000 Gigabit Wi-Fi 6 Router  
                  2) AX1800 Dual Band Wi-Fi 6 Router  
**Brand Name** : tp-link  
**Test Model** : 1) Archer AX53  
**Series Model** : 2) Archer AX23, Archer AX20, Archer AX1800, Archer AX21  
**Applicant** : TP-Link Systems Inc.  
**Address** : 10 Mauchly, Irvine, CA 92618  
**Manufacturer** : TP-Link Systems Inc.  
**Address** : 10 Mauchly, Irvine, CA 92618  
**Date of Receipt** : Apr. 14, 2025  
**Date of Test** : Apr. 18, 2025 ~ May 14, 2025  
**Issued Date** : May 26, 2025  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: DG20250414156  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

**Prepared by** : Sheldon Ou  
Sheldon Ou

**Approved by** : Chay Cai  
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China  
Tel: +86-769-8318-3000 Web: [www.newbtl.com](http://www.newbtl.com) Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
<b>REPORT ISSUED HISTORY</b>	<b>4</b>
<b>1 . APPLICABLE STANDARDS</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
2.1 TEST FACILITY	6
2.2 MEASUREMENT UNCERTAINTY	6
2.3 TEST ENVIRONMENT CONDITIONS	6
<b>3 . GENERAL INFORMATION</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 SUPPORT UNITS	9
3.5 CUSTOMER INFORMATION DESCRIPTION	9
<b>4 . RADIATED EMISSIONS</b>	<b>10</b>
4.1 LIMIT	10
4.2 TEST PROCEDURE	10
4.3 DEVIATION FROM TEST STANDARD	11
4.4 TEST SETUP	11
4.5 EUT OPERATION CONDITIONS	11
4.6 TEST RESULTS - 30 MHZ TO 1000 MHZ	11
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>12</b>
<b>6 . EUT TEST PHOTO</b>	<b>13</b>
<b>APPENDIX A - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>14</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2504G012	R00	Original Report.	May 26, 2025	Valid

## 1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions - 30MHz to 1000MHz	APPENDIX A	PASS	-----

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The radiated Emissions - 30MHz to 1000MHz have been re-evaluated by sample of FCC ID: 2BH7FAX53, test model name: Archer AX53. It is found that the new data are the worse, so the test data are reissue from the FCC ID: 2BH7FAX53, test model name: Archer AX53.  
The difference(s):
  - a. Update the information of the signal transformer. The only difference between the new and old materials is that the manufacturer is different. The materials are pin-to-pin. The circuit diagram and layout remain unchanged. The number of the signal transformer has been updated to T1, T5 and T8.
- (3) The other test records and results please refer to the test report number: 2411TW0101-U2, issued date is Dec. 25, 2024, and issued by:  
Test Laboratory: MRT Technology (Taiwan) Co., Ltd.  
Address: No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

This report is only valid conjunction with the above referenced test report.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

## 2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{\text{,dB}}$
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

## 2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
Radiated Emissions -30MHz to 1000MHz	23°C	52%	AC 120V/60Hz	Calvin Wen	May 14, 2025

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	1) AX3000 Gigabit Wi-Fi 6 Router 2) AX1800 Dual Band Wi-Fi 6 Router
Brand Name	tp-link
Test Model	1) Archer AX53
Series Model	2) Archer AX23, Archer AX20, Archer AX1800, Archer AX21
Model Difference(s)	Please refer to Note 2.
Power Source	DC Voltage supplied from AC adapter. Model: T120150-2B1
Power Rating	I/P: 100-240V ~ 50/60Hz 0.6A      O/P: 12V <del>====</del> 1.5A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ax: up to 574 Mbps

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Model Difference(s):

Product Name	Model Name	Difference
AX3000 Gigabit Wi-Fi 6 Router	Archer AX53	--
AX1800 Dual Band Wi-Fi 6 Router	Archer AX23, Archer AX20, Archer AX1800	Turn off the U-NII-2A, U-NI-2C functions and 160MHz bandwidth of Wi-Fi 5GHz through software.
	Archer AX21	The shell is different from AX53, PCB RJ45 port position is adjusted, and the Turn off the U-NII-2A and U-NI1-2Cfunctions of Wi-Fi 5GHz through software.

3. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20) CH03 - CH09 for IEEE 802.11n(HT40), IEEE 802.11ax(HE40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

### 3.2 DESCRIPTION OF TEST MODES


The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX AX(HE20) Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

<b>Radiated emissions test- 30MHz to 1000MHz</b>	
Final Test Mode	Description
Mode 1	TX AX(HE20) Mode Channel 06

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

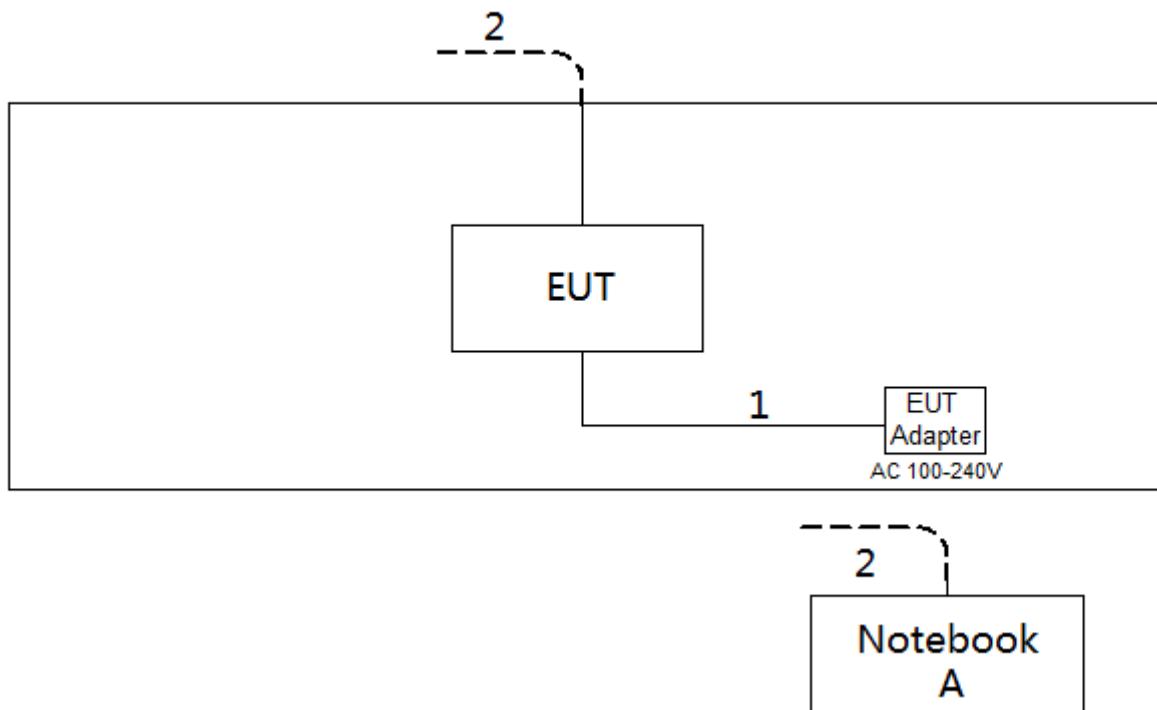

### 3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	Nbl-WAQ9HNRP	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

### 3.5 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.

## 4. RADIATED EMISSIONS

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (30 MHz-1000 MHz)

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3m)
30-88	100
88-216	150
216-960	200
Above 960	500

#### NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>u</sub>V/m)=20log Emission level (uV/m).

### 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1 GHz)
- g. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz


Receiver Parameters	Setting
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

#### 4.3 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4 TEST SETUP

30 MHz to 1 GHz

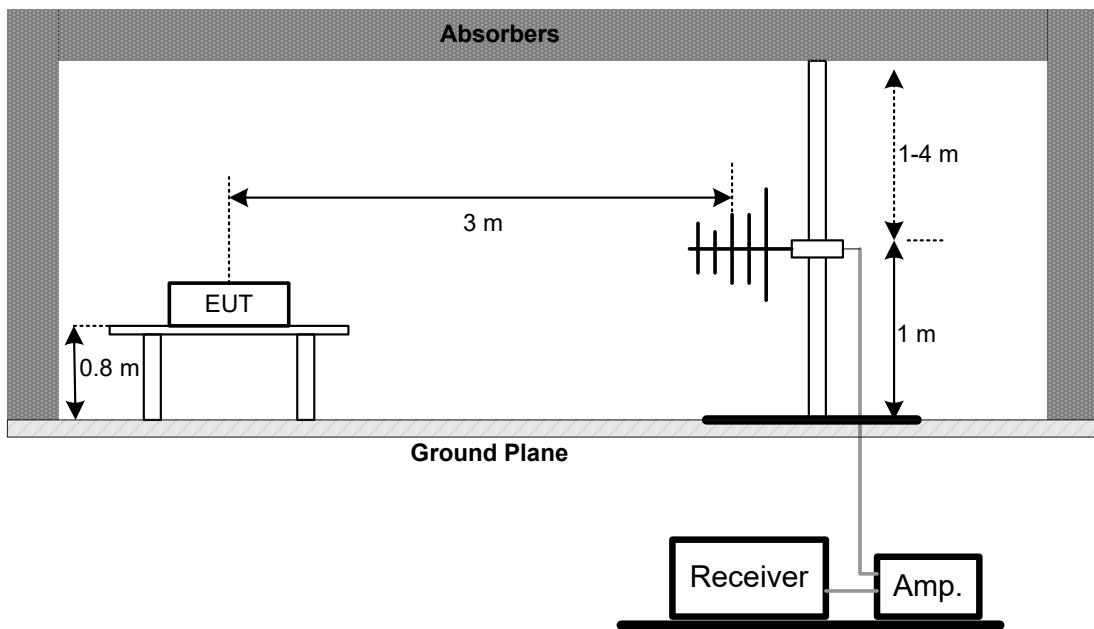

#### 4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 4.6 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX A.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

**5. MEASUREMENT INSTRUMENTS LIST**

<b>Radiated Emissions - 30 MHz to 1 GHz</b>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 31, 2025
4	Cable	RegalWay	LMR400-NMNM-12 .5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0. 5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 16, 2025



Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## 6. EUT TEST PHOTO


### Radiated Emissions Test Photos

30 MHz to 1 GHz

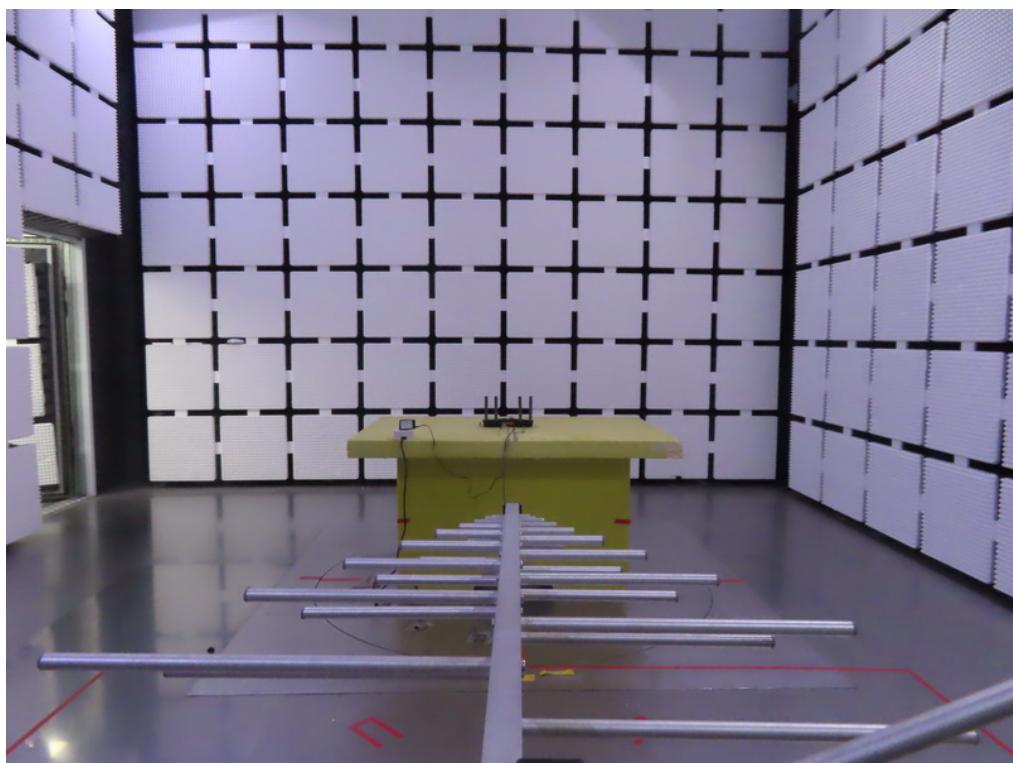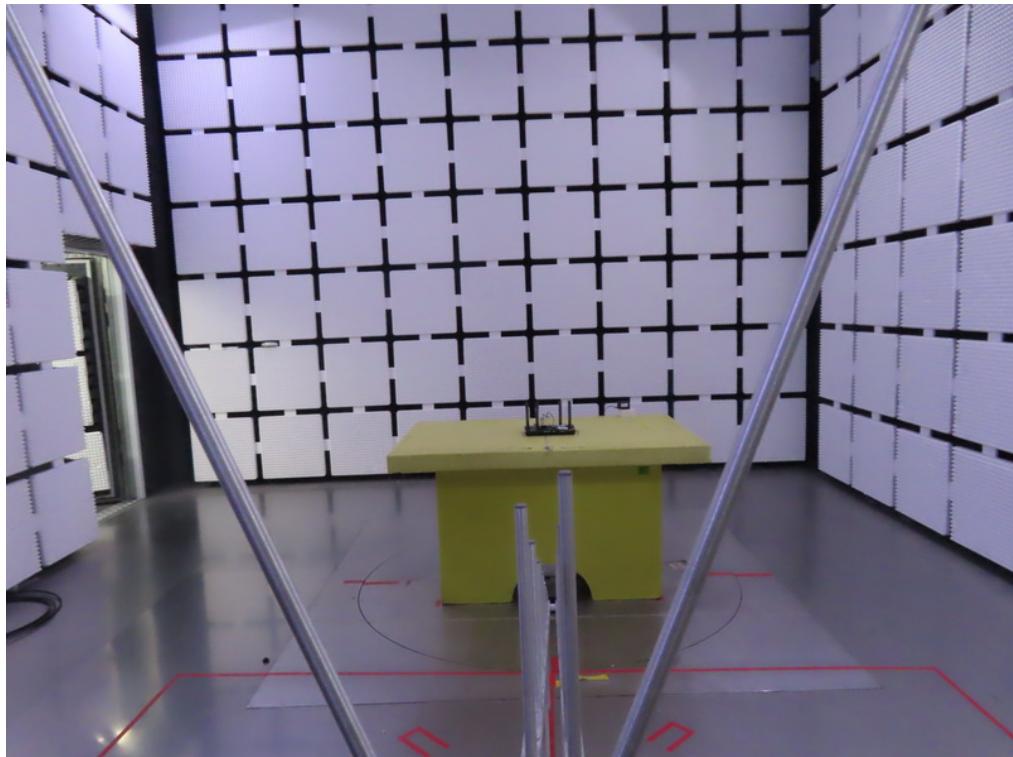

**APPENDIX A - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode	TX AX(HE20) Mode 2437 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

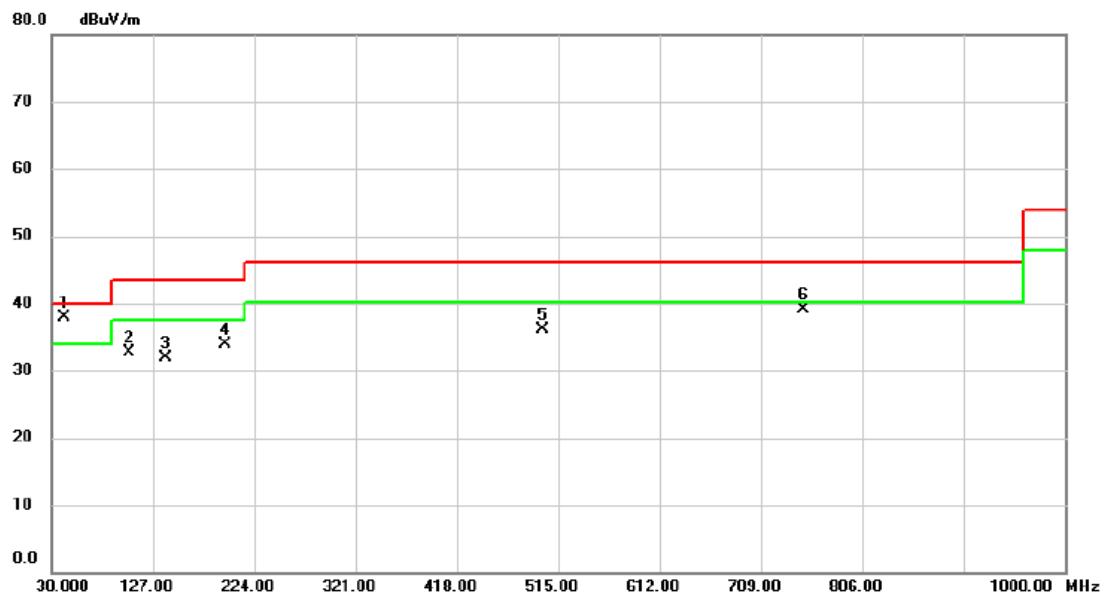


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	42.610	49.40	-11.59	37.81	40.00	-2.19	peak	
2		104.690	47.76	-15.13	32.63	43.52	-10.89	peak	
3		139.610	43.54	-11.70	31.84	43.52	-11.68	peak	
4		195.870	47.82	-13.95	33.87	43.52	-9.65	peak	
5		500.450	41.87	-5.82	36.05	46.02	-9.97	peak	
6		749.740	39.86	-0.83	39.03	46.02	-6.99	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode 2437 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

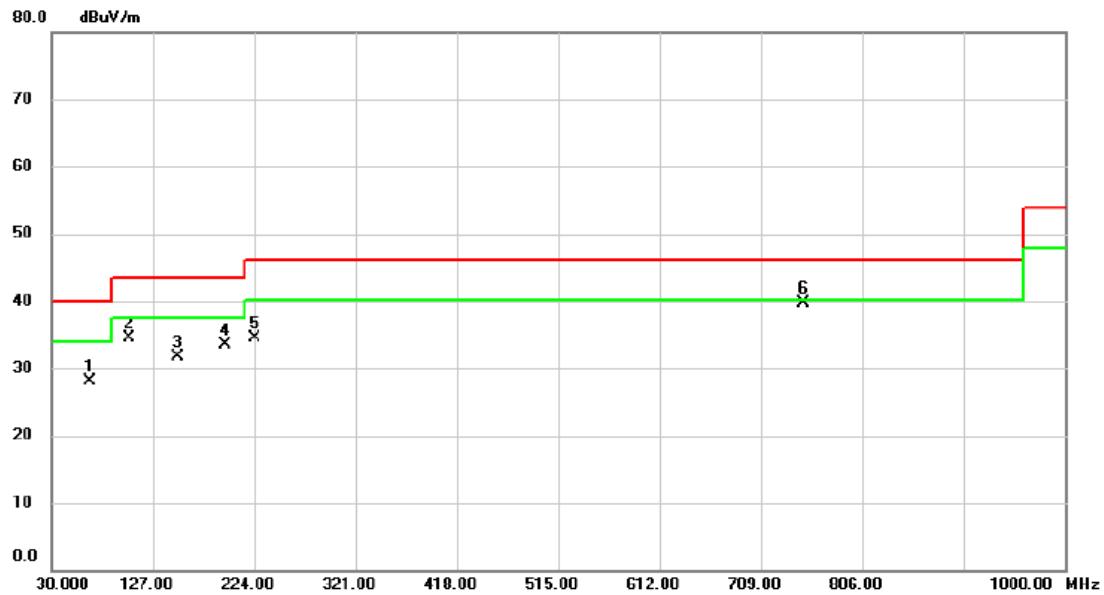

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		66.860	40.99	-12.81	28.18	40.00	-11.82	peak	
2		103.720	49.73	-15.26	34.47	43.52	-9.05	peak	
3		150.280	42.75	-11.10	31.65	43.52	-11.87	peak	
4		195.870	47.41	-13.95	33.46	43.52	-10.06	peak	
5		224.970	48.44	-13.94	34.50	46.02	-11.52	peak	
6 *		749.740	40.53	-0.83	39.70	46.02	-6.32	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**End of Test Report**