



802.11 be-EHT20 Power Spectral Density - Ant 1


Channel 169 (5845MHz)

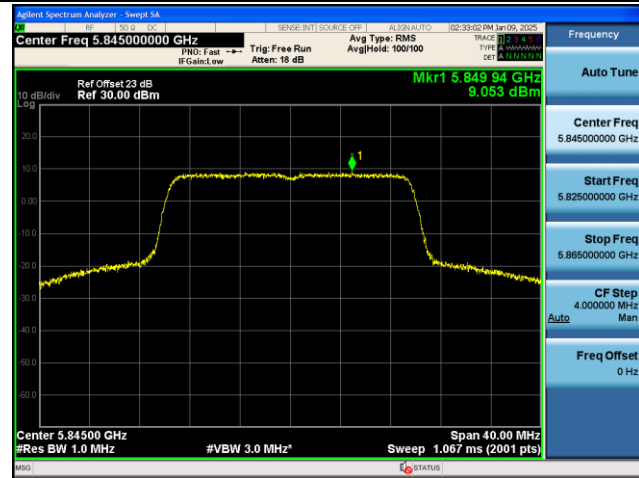

Channel 173 (5865MHz)

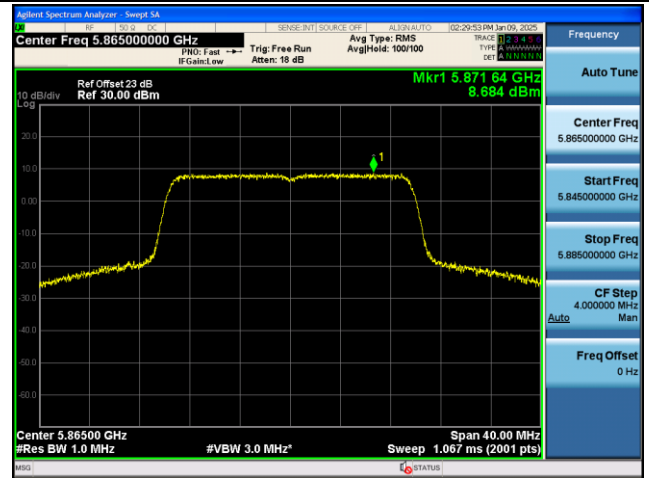


Channel 177 (5885MHz)

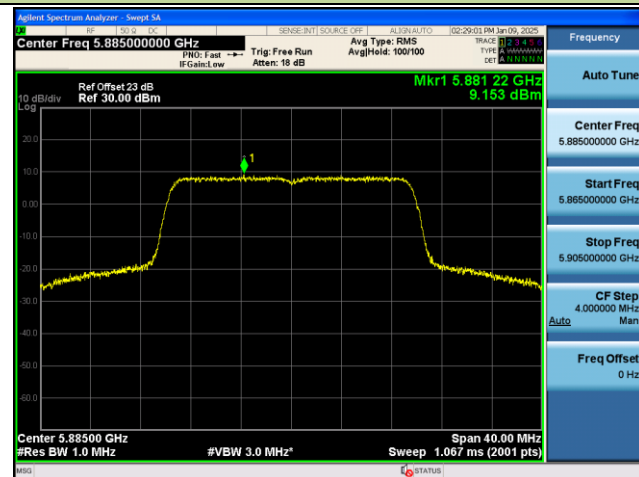


802.11 be-EHT40 Power Spectral Density - Ant 1

Channel 167 (5835MHz)

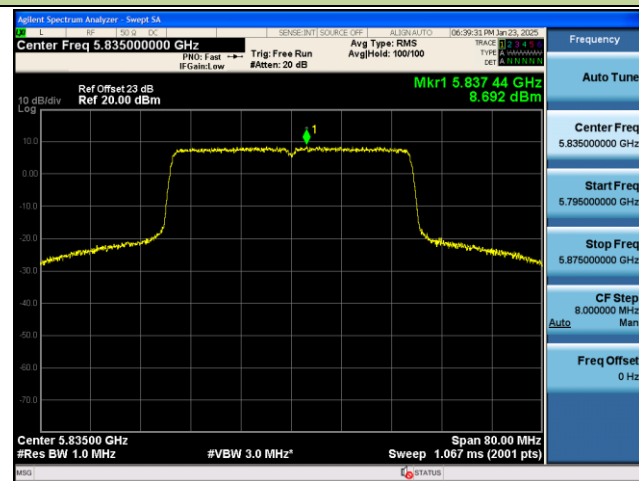


Channel 175 (5875MHz)

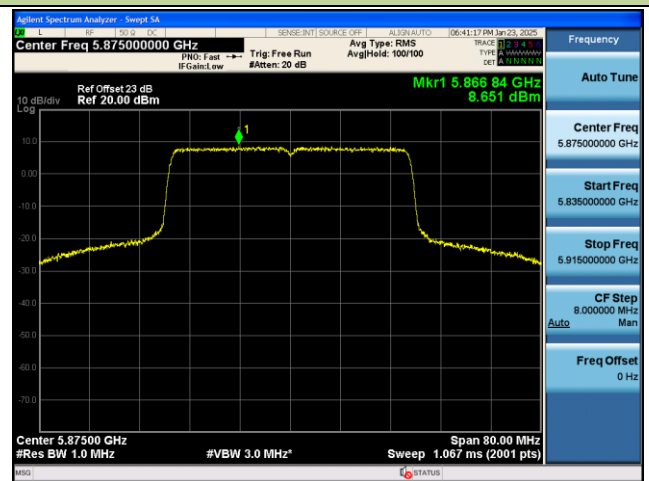


802.11 be-EHT80 Power Spectral Density - Ant 1

Channel 171 (5855MHz)

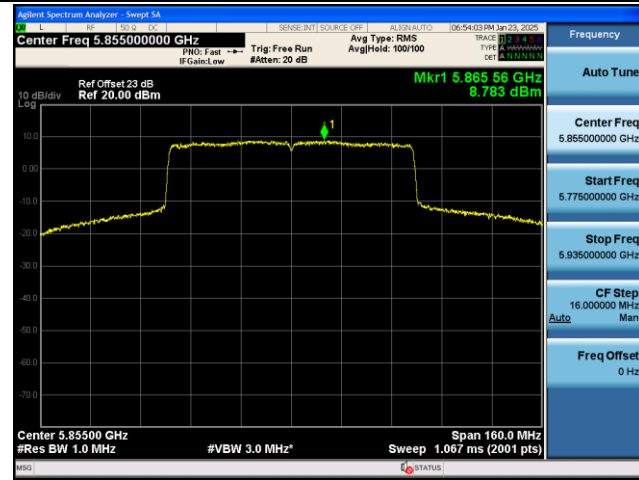

802.11be-EHT160 Power Spectral Density - Ant 1

Channel 163 (5815MHz)

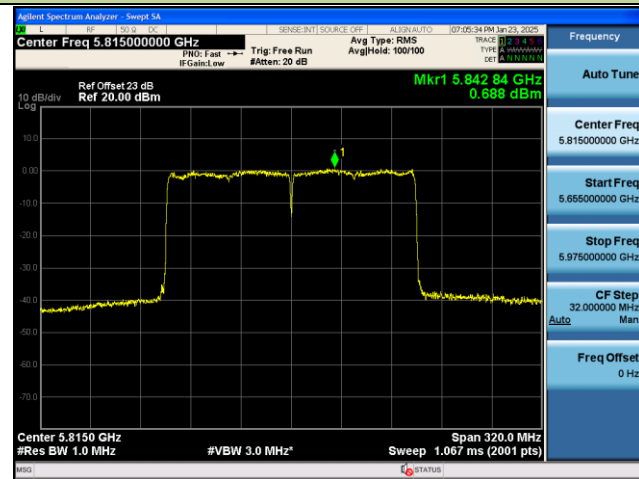

7.6. Frequency Stability Measurement

7.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.6.3.Test Procedure

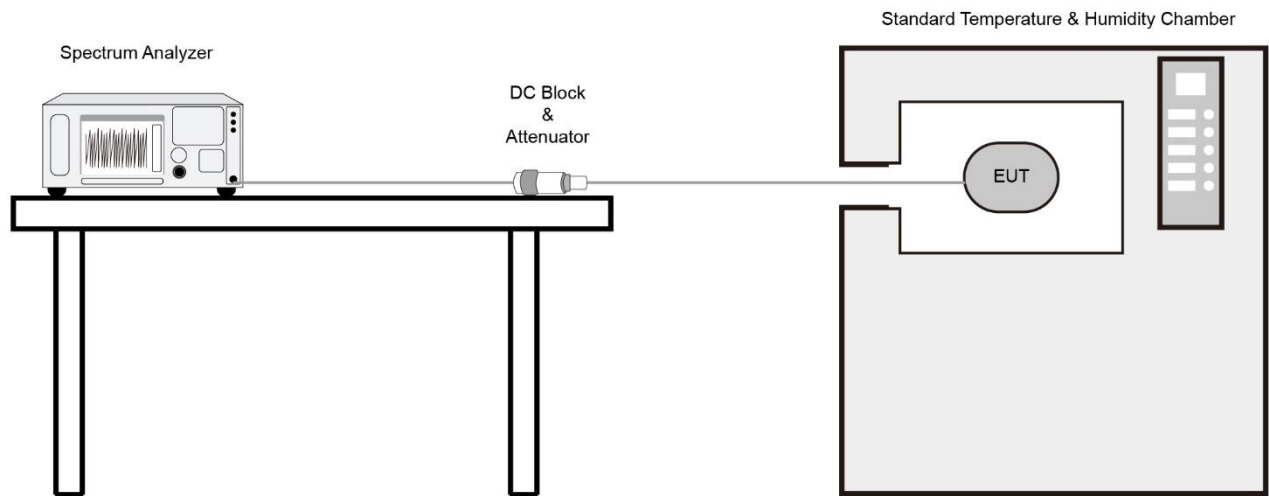

7.6.4.Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7. Radiated Spurious Emission Measurement

7.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

7.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.7.4. Test Setup

Below 1GHz Test Setup:

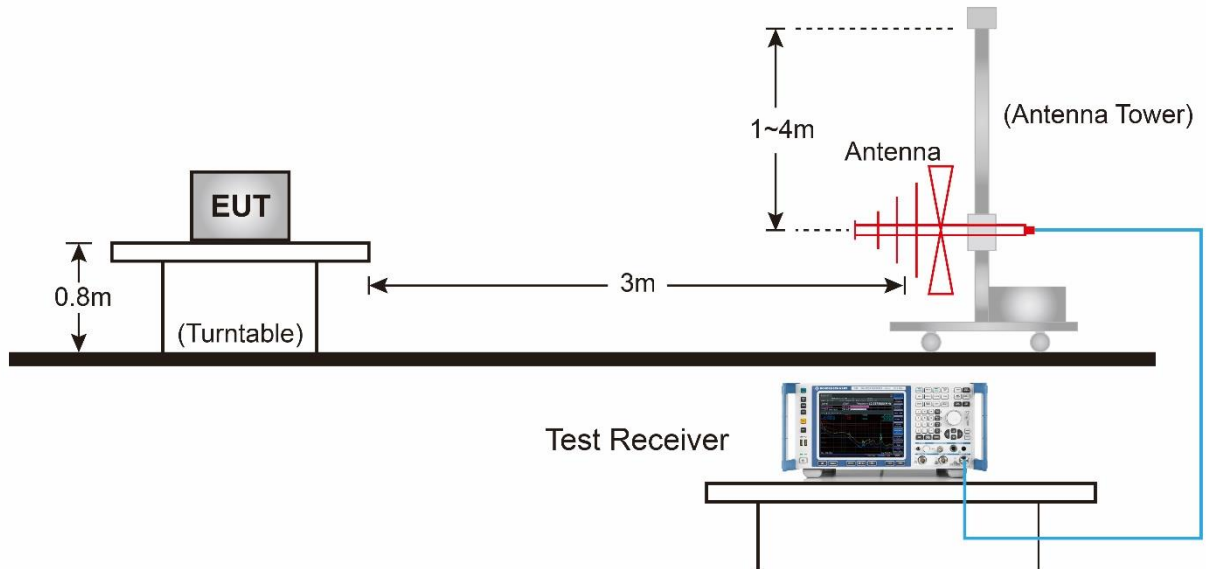


Above 1GHz Test Setup:

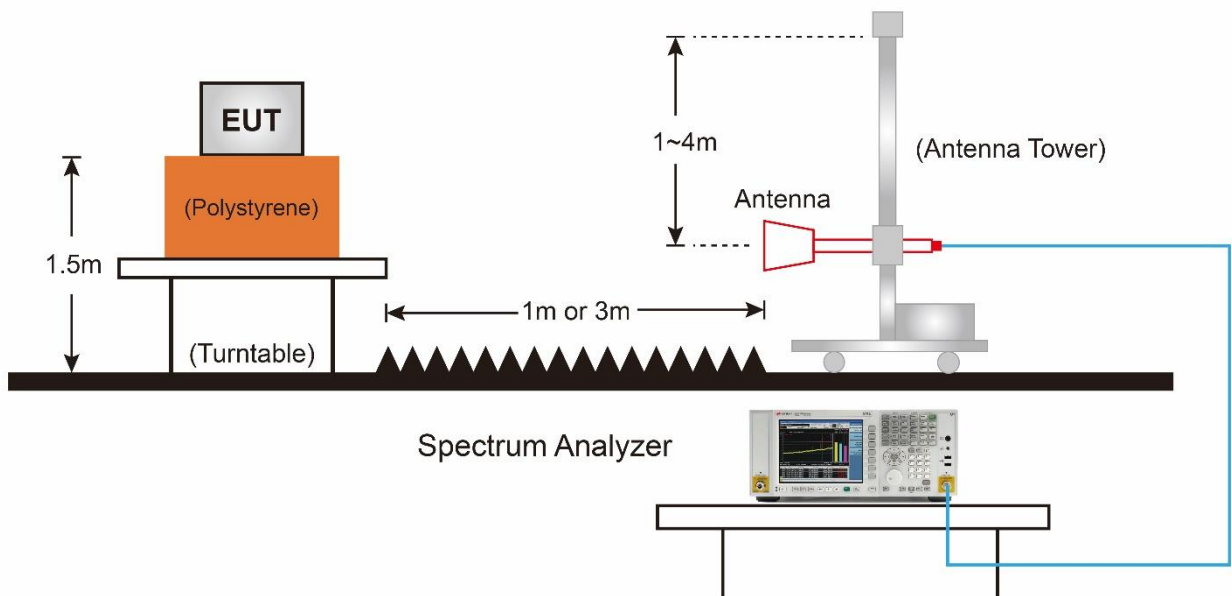

7.7.5. Test Result

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-12
Factor	VULB 9162	Temp. / Humidity	18°C /53%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

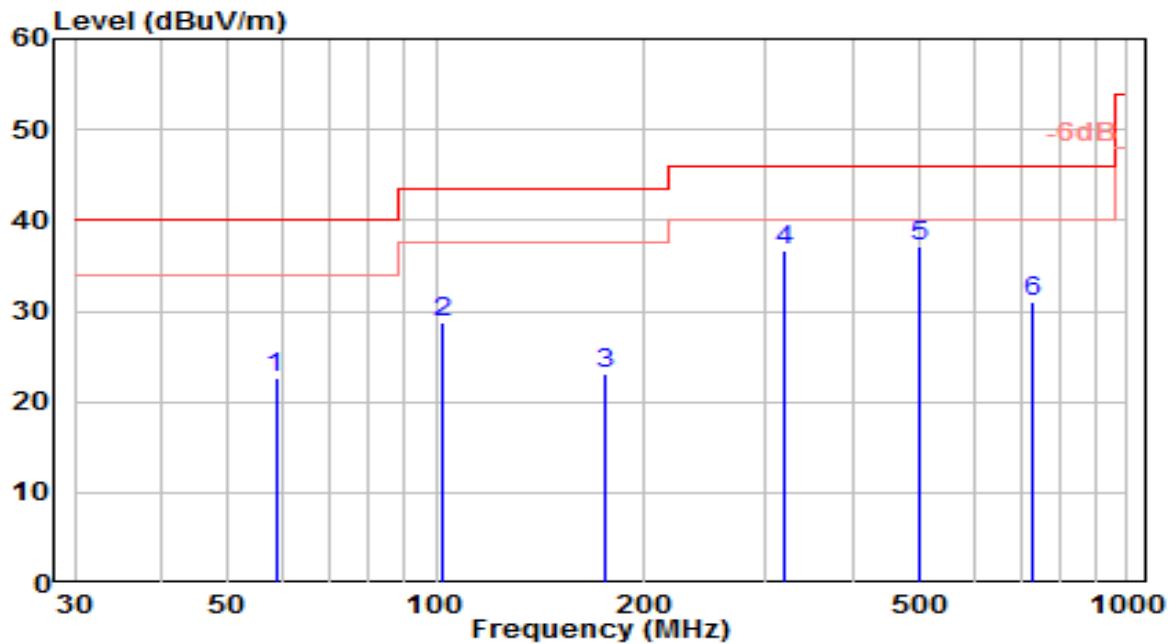


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	58.604	2.63	20.10	22.73	-17.27	40.00	150	260	QP
2	102.056	9.87	18.86	28.73	-14.77	43.50	150	70	QP
3	176.183	6.45	16.63	23.08	-20.42	43.50	150	80	QP
4	318.535	14.82	21.83	36.65	-9.35	46.00	100	240	QP
5	* 501.793	11.53	25.51	37.04	-8.96	46.00	150	240	QP
6	731.914	1.69	29.27	30.97	-15.03	46.00	150	195	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-12
Factor	VULB 9162	Temp. / Humidity	18°C /53%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

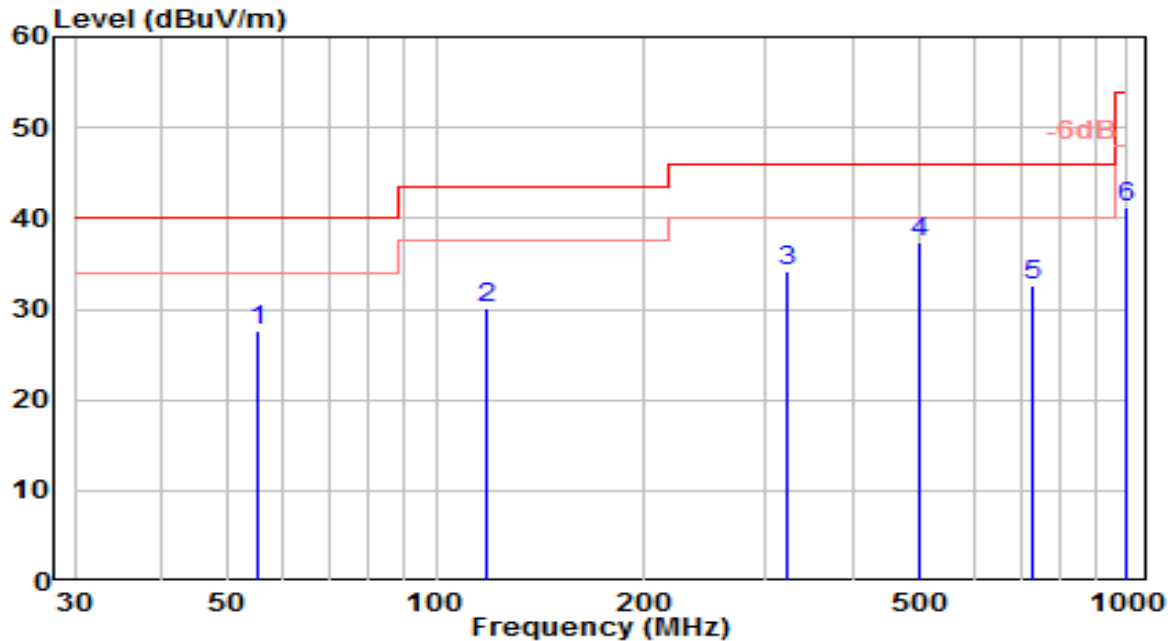


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	54.965	6.95	20.58	27.53	-12.47	40.00	100	240	QP
2	117.966	12.45	17.58	30.03	-13.47	43.50	100	280	QP
3	321.488	12.19	21.94	34.13	-11.87	46.00	150	200	QP
4	* 498.576	11.87	25.46	37.32	-8.68	46.00	100	110	QP
5	728.021	3.49	29.20	32.69	-13.31	46.00	150	175	QP
6	998.846	8.59	32.57	41.16	-12.84	54.00	100	185	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The amplitude of radiated emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which also are attenuated more than 20dB below the permissible value. Therefore, the data is not presented in the report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

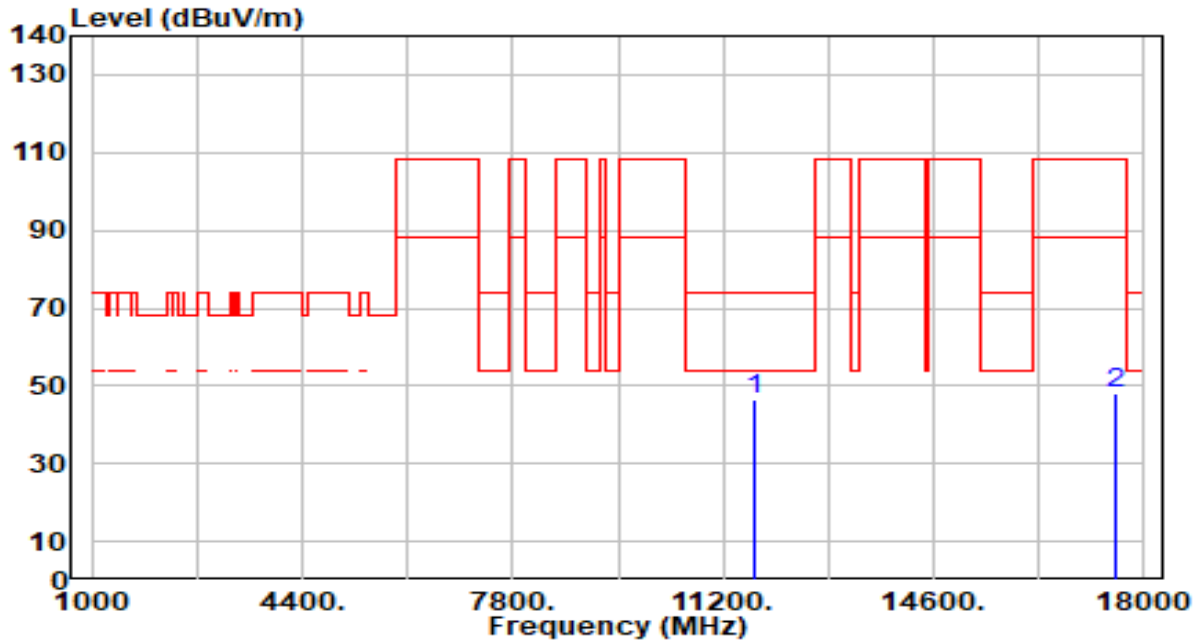


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	41.05	5.37	46.42	-27.58	74.00	289	360	Peak
2		17535.000	43.09	5.16	48.25	-59.95	108.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

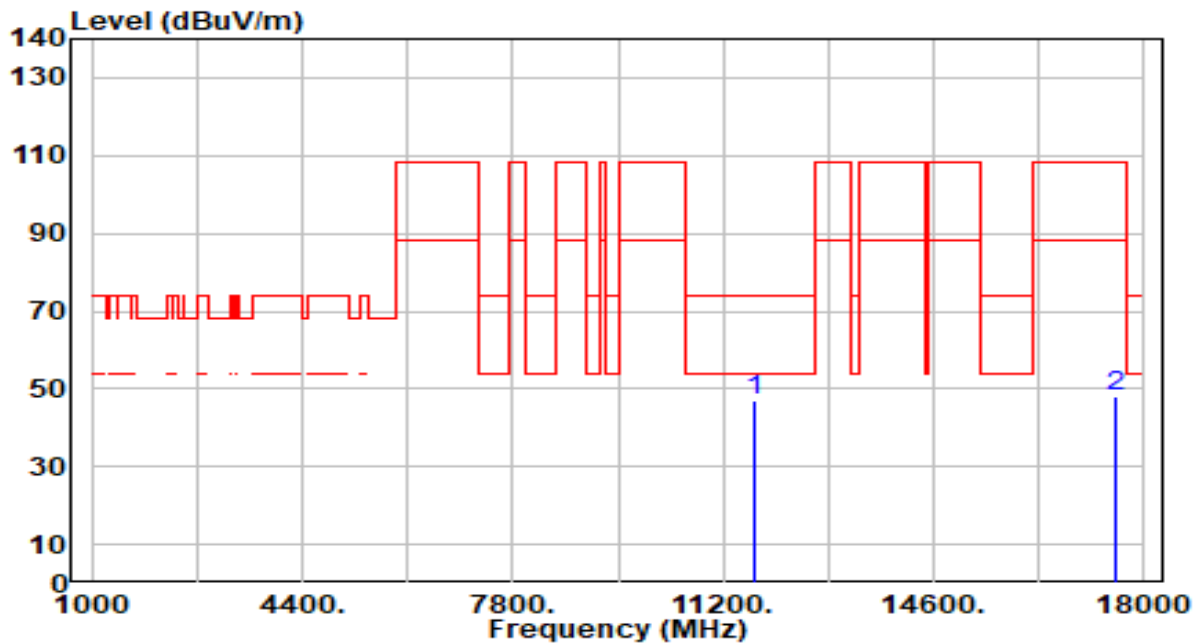


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	41.40	5.37	46.77	-27.23	74.00	300	346	Peak
2		17535.000	42.70	5.16	47.87	-60.33	108.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

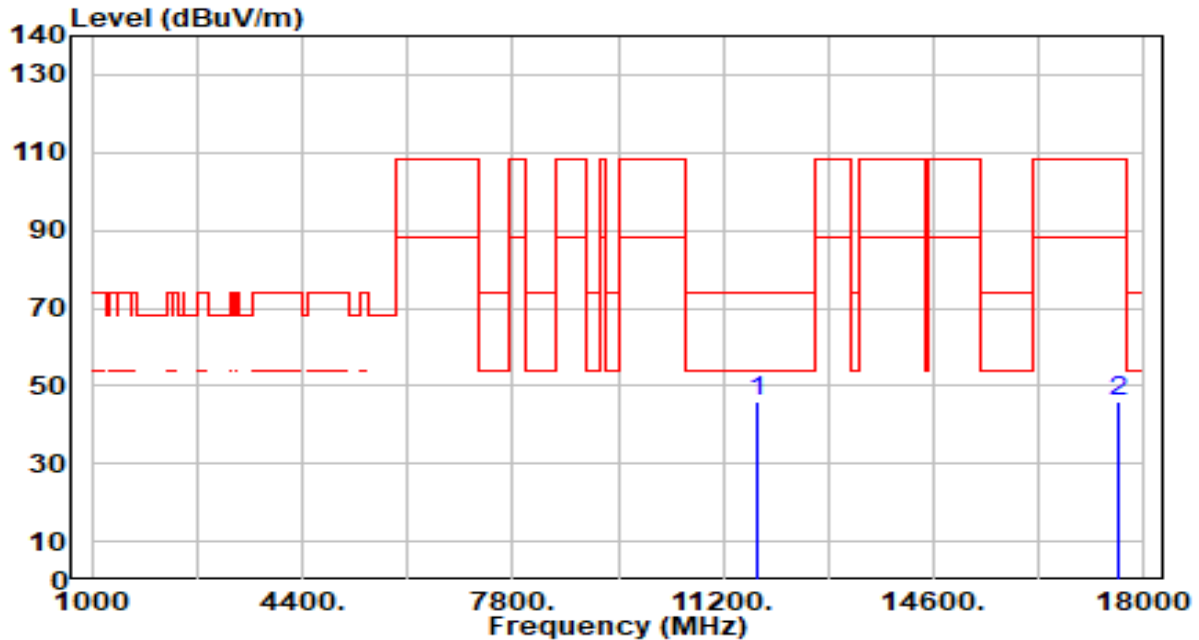


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	40.51	5.36	45.88	-28.12	74.00	300	0	Peak
2		17595.000	40.90	5.32	46.22	-61.98	108.20	300	21	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

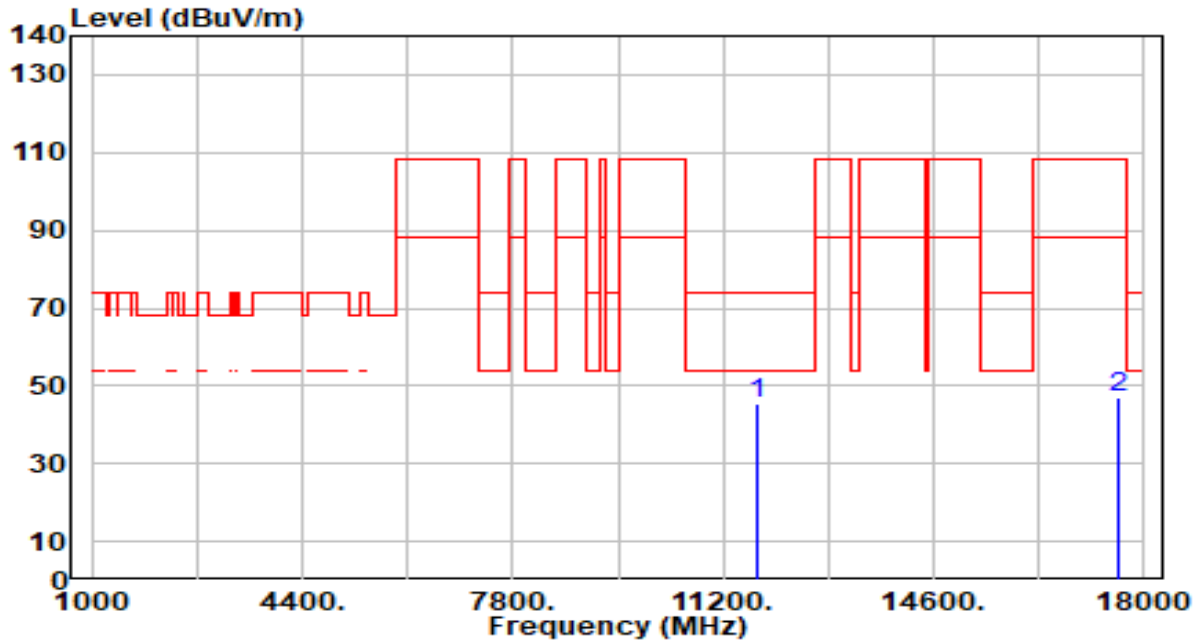


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	40.20	5.36	45.57	-28.43	74.00	300	89	Peak
2		17595.000	41.72	5.32	47.04	-61.16	108.20	300	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

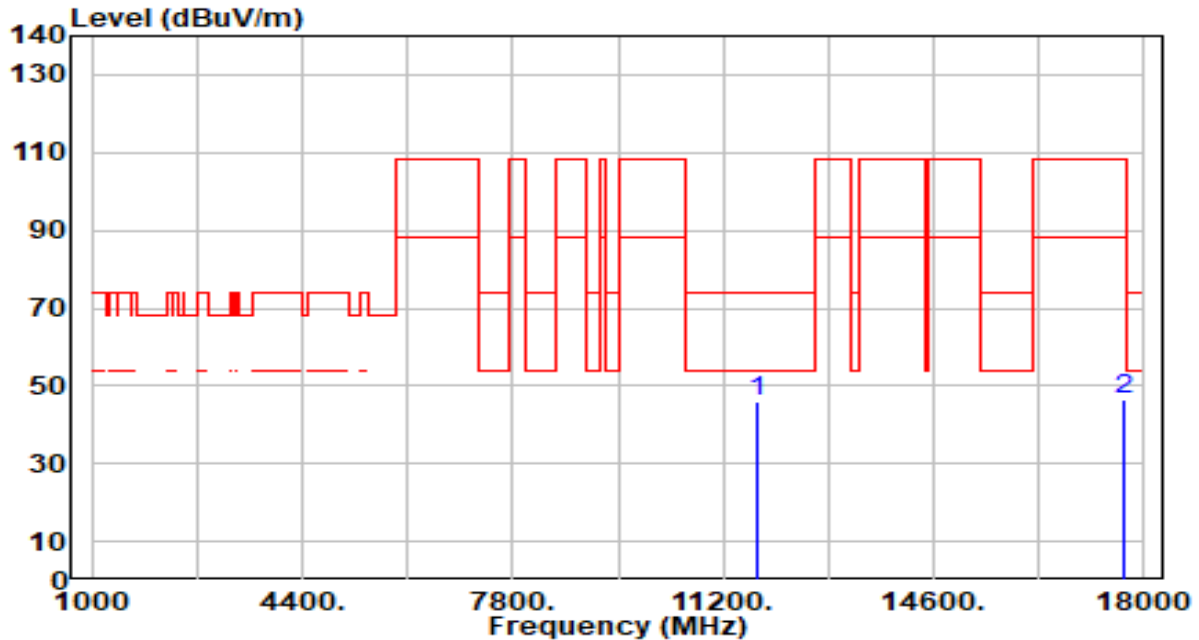


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	40.59	5.36	45.95	-28.05	74.00	300	211	Peak
2		17655.000	40.98	5.36	46.34	-61.86	108.20	300	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

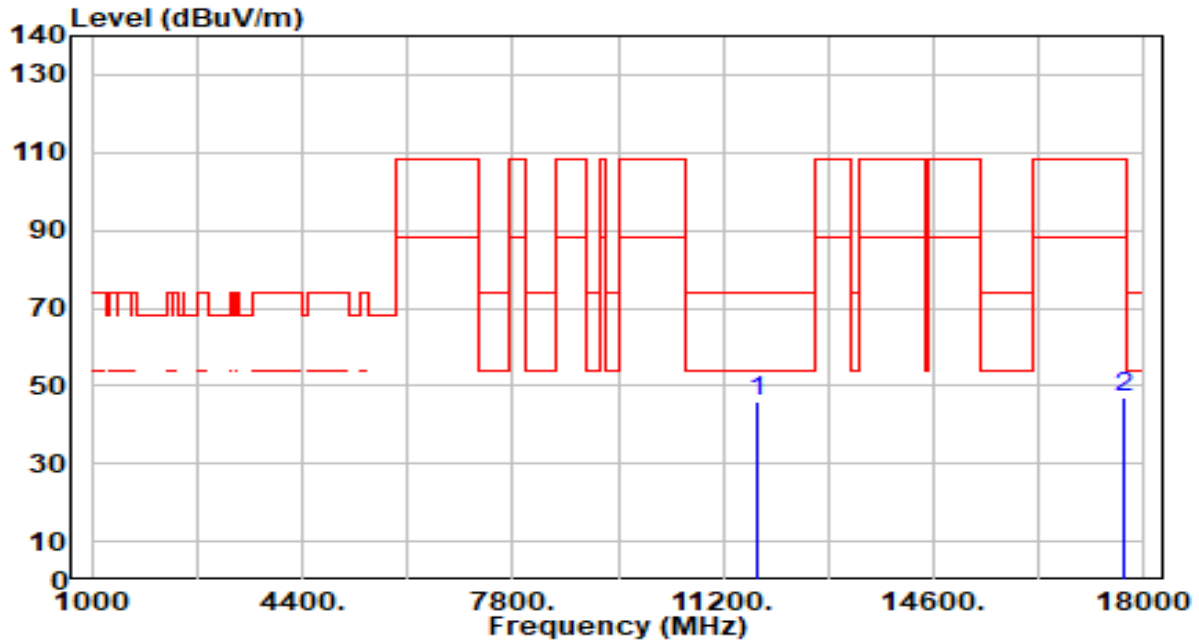


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	40.39	5.36	45.75	-28.25	74.00	300	61	Peak
2		17655.000	41.89	5.36	47.25	-60.95	108.20	300	166	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

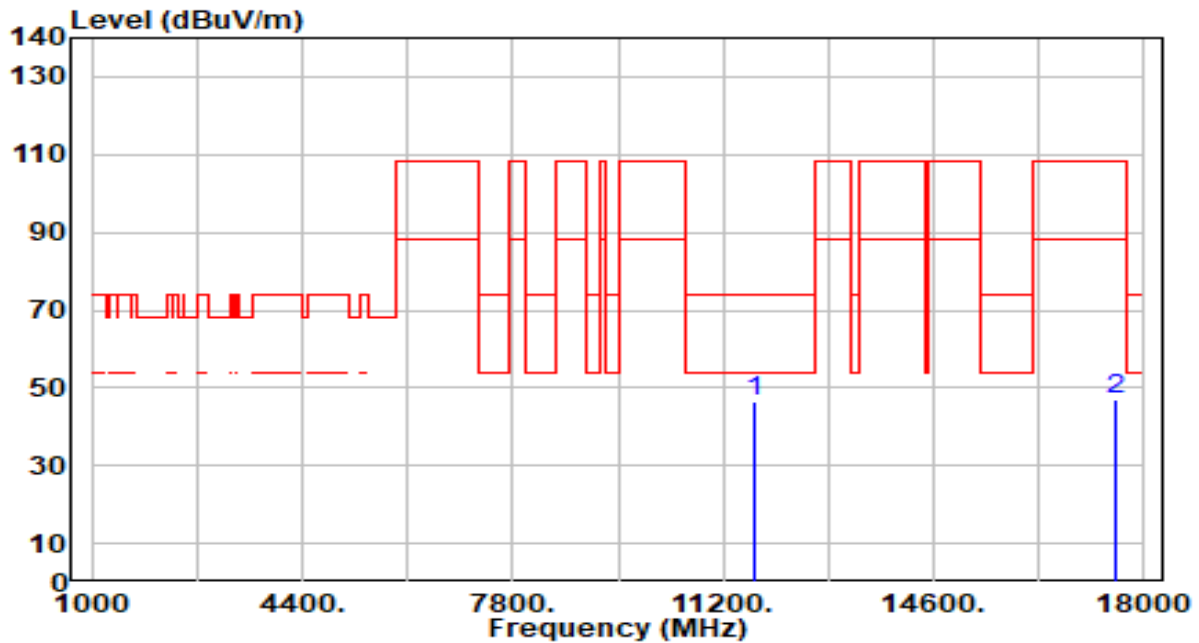


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	40.96	5.37	46.32	-27.68	74.00	300	331	Peak
2		17535.000	41.92	5.16	47.08	-61.12	108.20	300	311	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

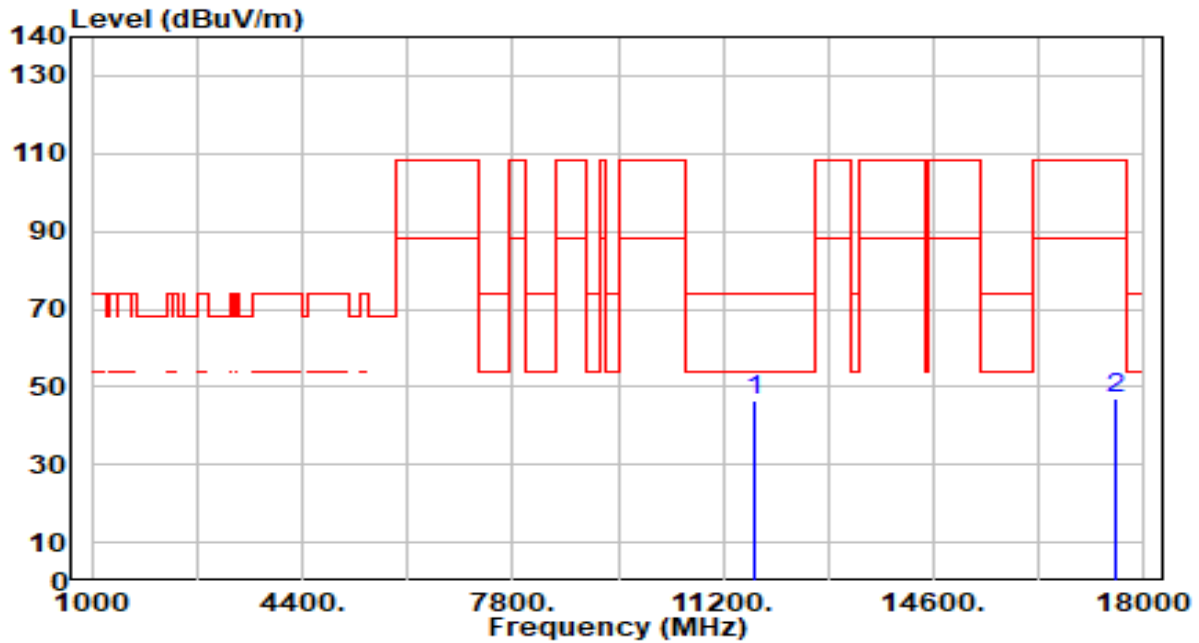


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	41.09	5.37	46.46	-27.54	74.00	300	39	Peak
2		17535.000	41.71	5.16	46.87	-61.33	108.20	300	4	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

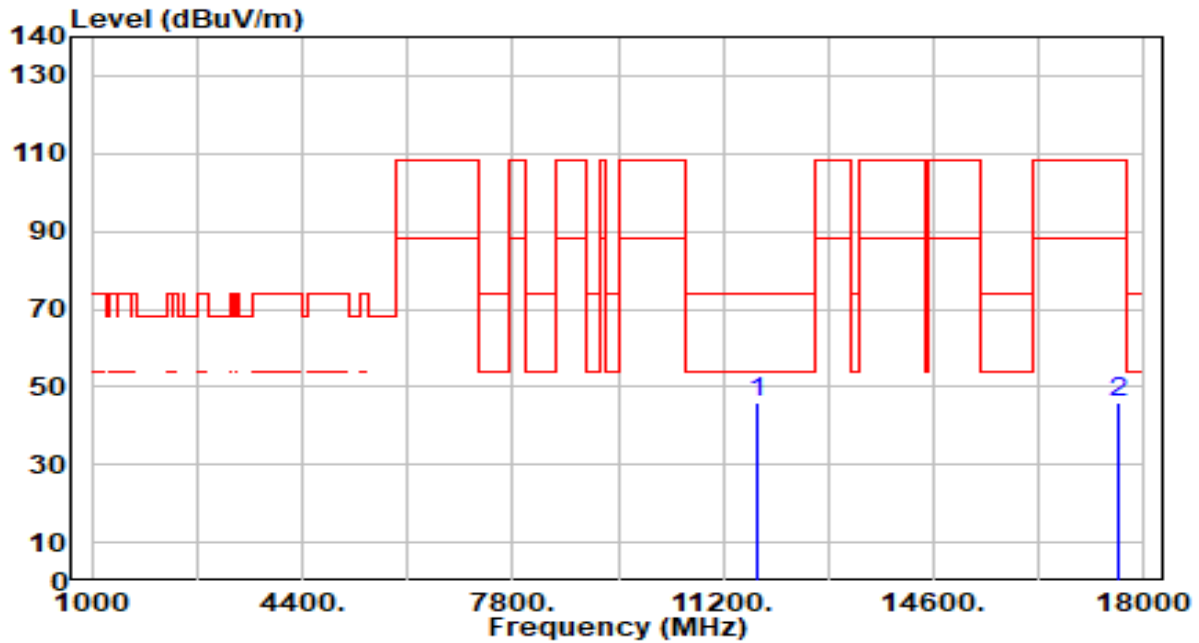


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	40.47	5.36	45.83	-28.17	74.00	300	81	Peak
2		17595.000	40.70	5.32	46.02	-62.18	108.20	300	358	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

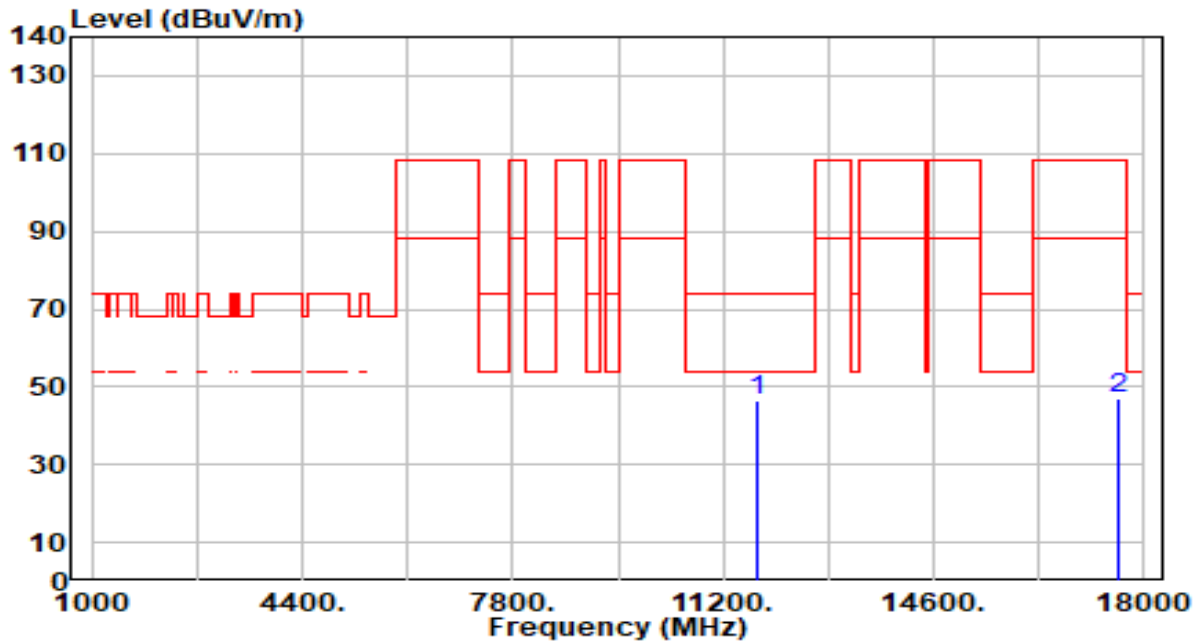


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	41.26	5.36	46.62	-27.38	74.00	300	147	Peak
2		17595.000	41.49	5.32	46.81	-61.39	108.20	300	31	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

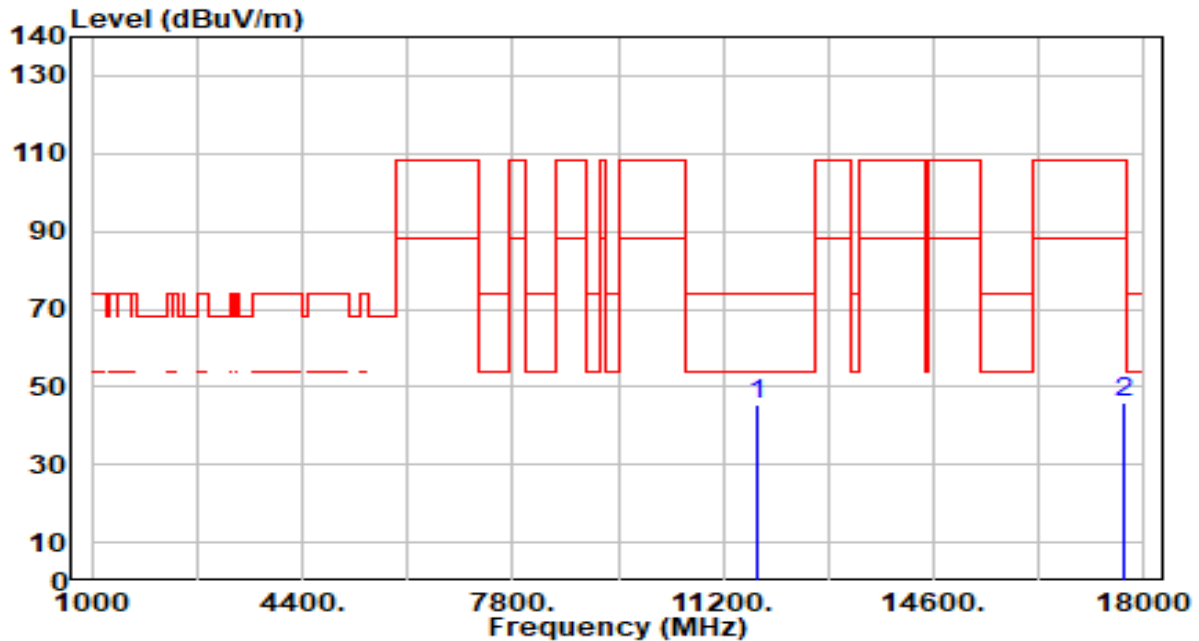


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	40.27	5.36	45.64	-28.36	74.00	300	247	Peak
2		17655.000	40.75	5.36	46.12	-62.08	108.20	300	86	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

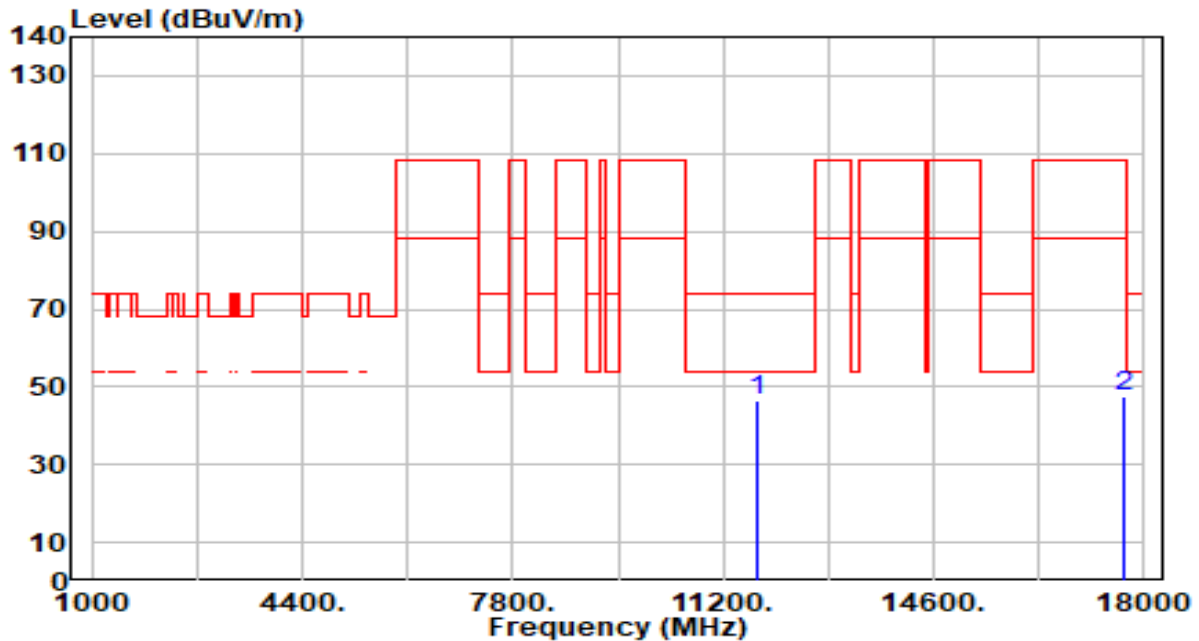


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	40.96	5.36	46.33	-27.67	74.00	300	31	Peak
2		17655.000	42.01	5.36	47.38	-60.82	108.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

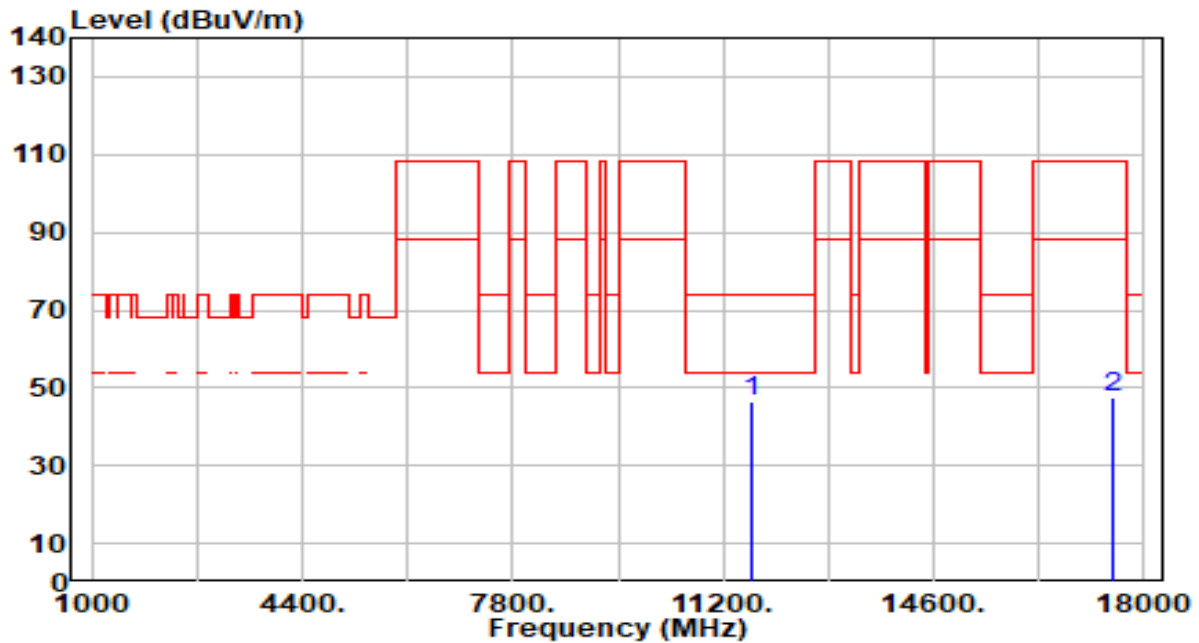


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	41.15	5.37	46.52	-27.48	74.00	300	353	Peak
2		17505.000	42.30	5.08	47.38	-60.82	108.20	300	299	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

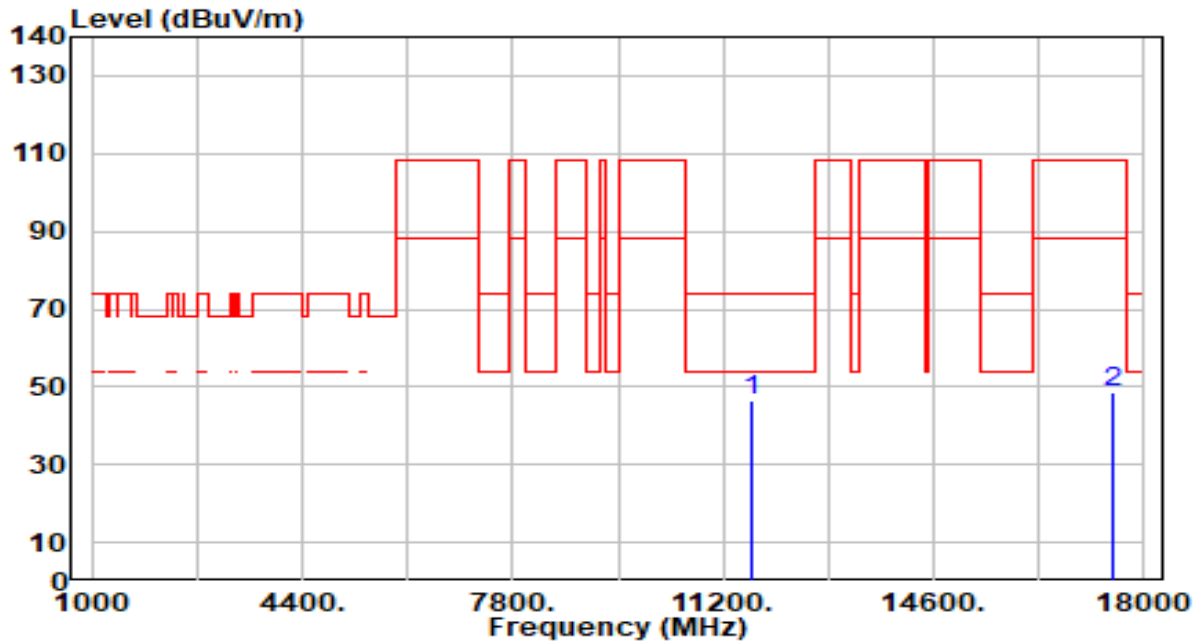


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	41.07	5.37	46.44	-27.56	74.00	300	361	Peak
2		17505.000	43.58	5.08	48.66	-59.54	108.20	300	184	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

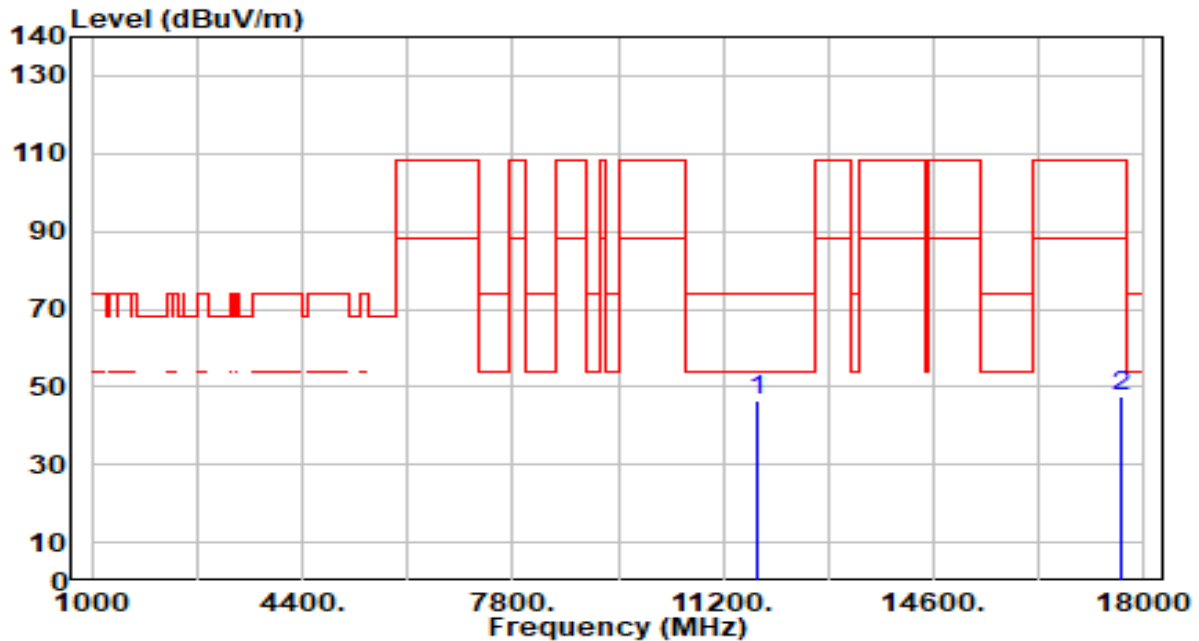


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	41.10	5.36	46.47	-27.53	74.00	300	248	Peak
2		17625.000	42.11	5.34	47.45	-60.75	108.20	300	172	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

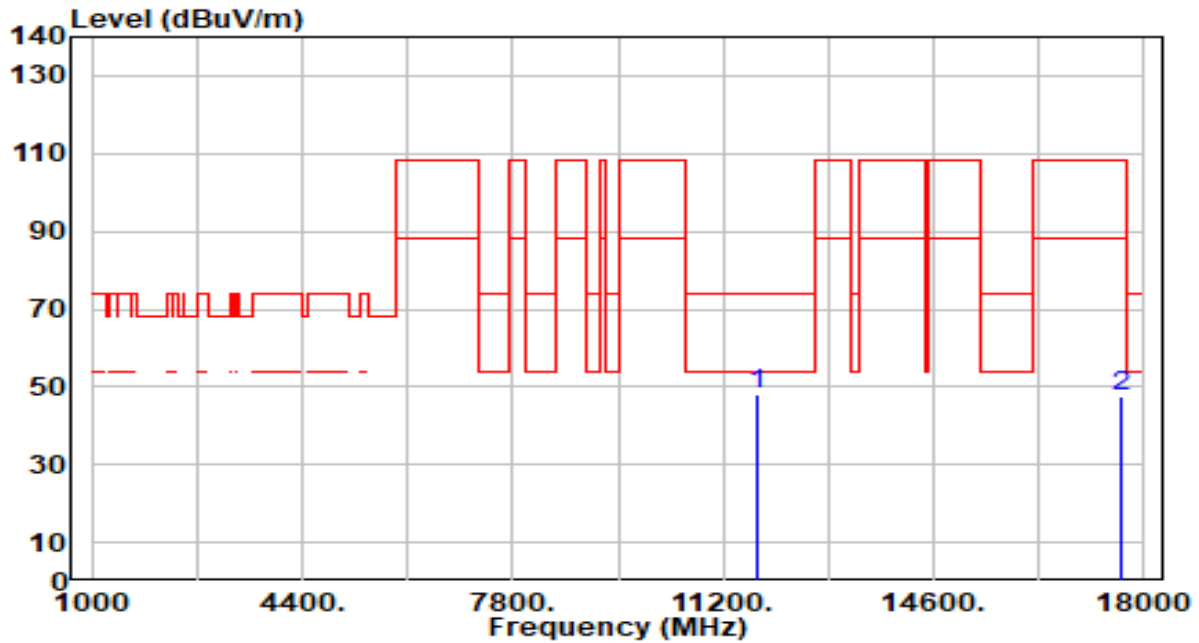


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	42.51	5.36	47.87	-26.13	74.00	300	98	Peak
2		17625.000	42.45	5.34	47.79	-60.41	108.20	300	44	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

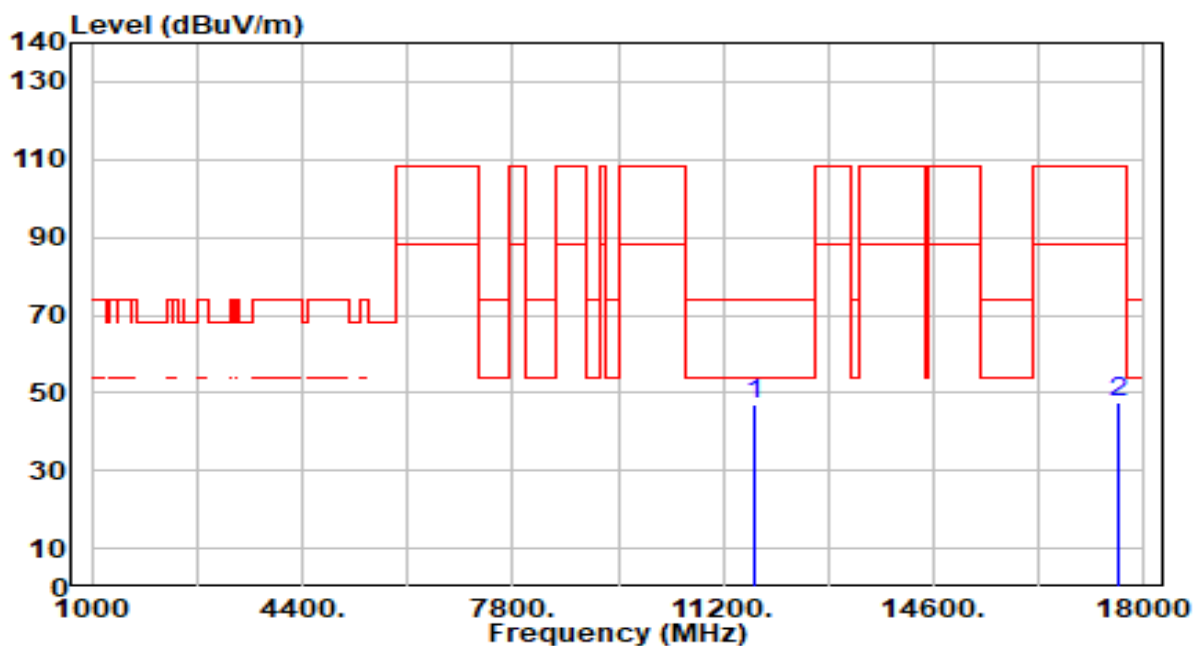


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	41.70	5.37	47.07	-26.93	74.00	300	-1	Peak
2		17565.000	42.12	5.24	47.36	-60.84	108.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

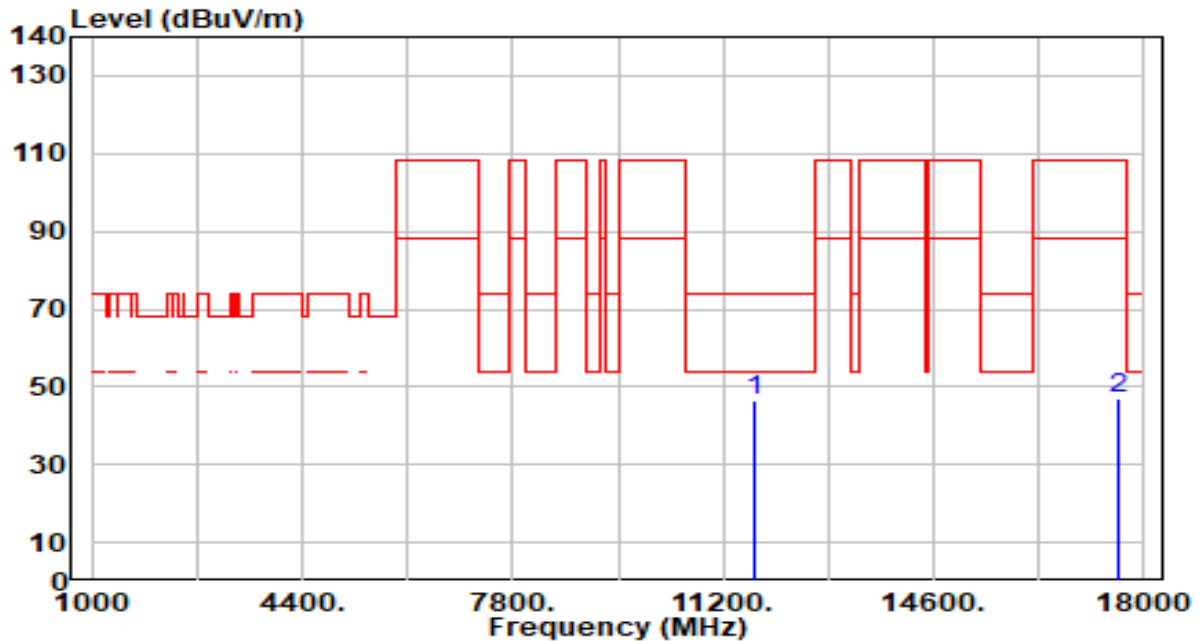


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	41.39	5.37	46.75	-27.25	74.00	300	242	Peak
2		17565.000	41.57	5.24	46.81	-61.39	108.20	300	199	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band4_CH 163_ANT 0+1	Test Voltage	AC 120V/60Hz

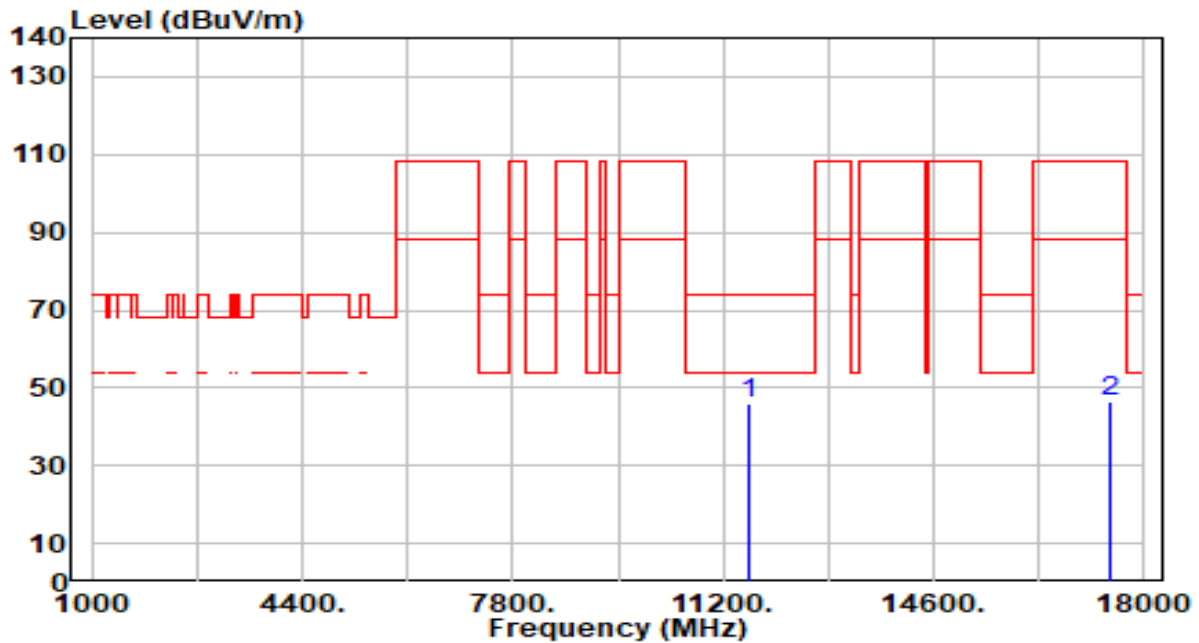


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	40.43	5.37	45.80	-28.20	74.00	300	213	Peak
2		17445.000	41.60	4.97	46.57	-61.63	108.20	300	103	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band4_CH 163_ANT 0+1	Test Voltage	AC 120V/60Hz

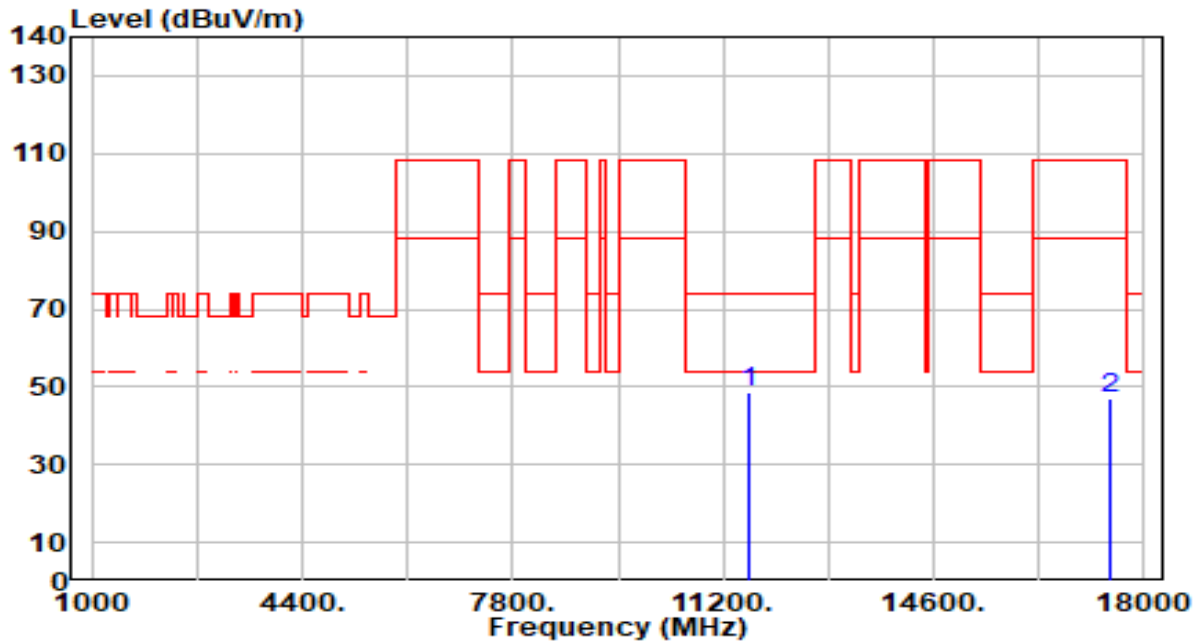


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	43.05	5.37	48.42	-25.58	74.00	300	97	Peak
2		17445.000	41.94	4.97	46.91	-61.29	108.20	300	217	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

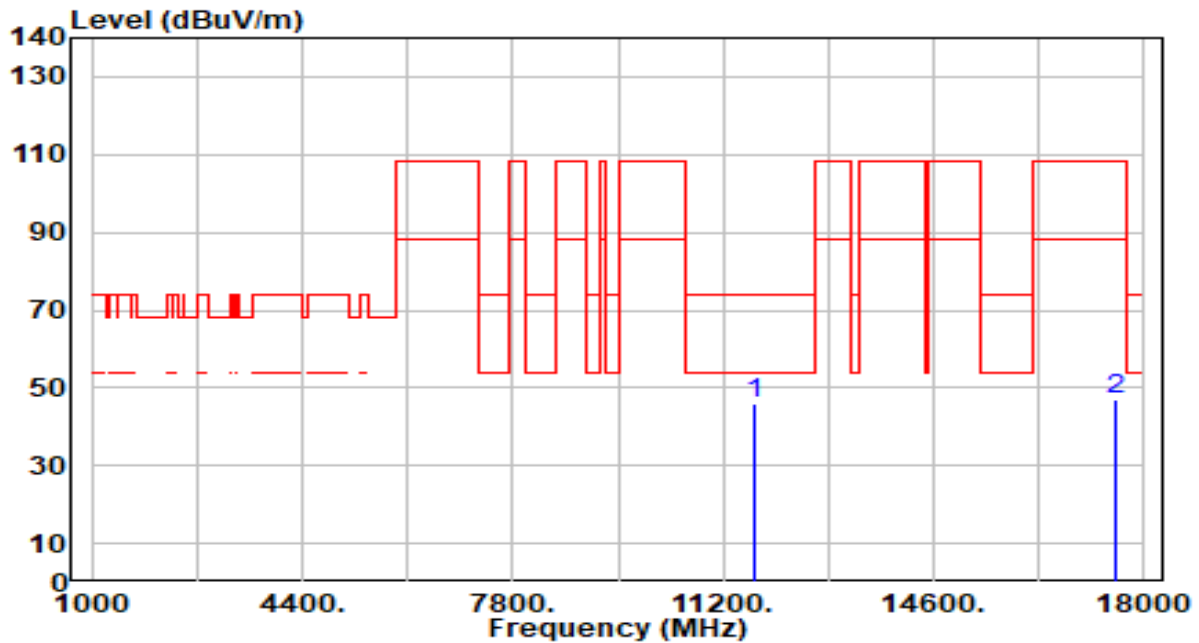


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	40.85	5.37	46.22	-27.78	74.00	300	40	Peak
2		17535.000	41.71	5.16	46.87	-61.33	108.20	300	86	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

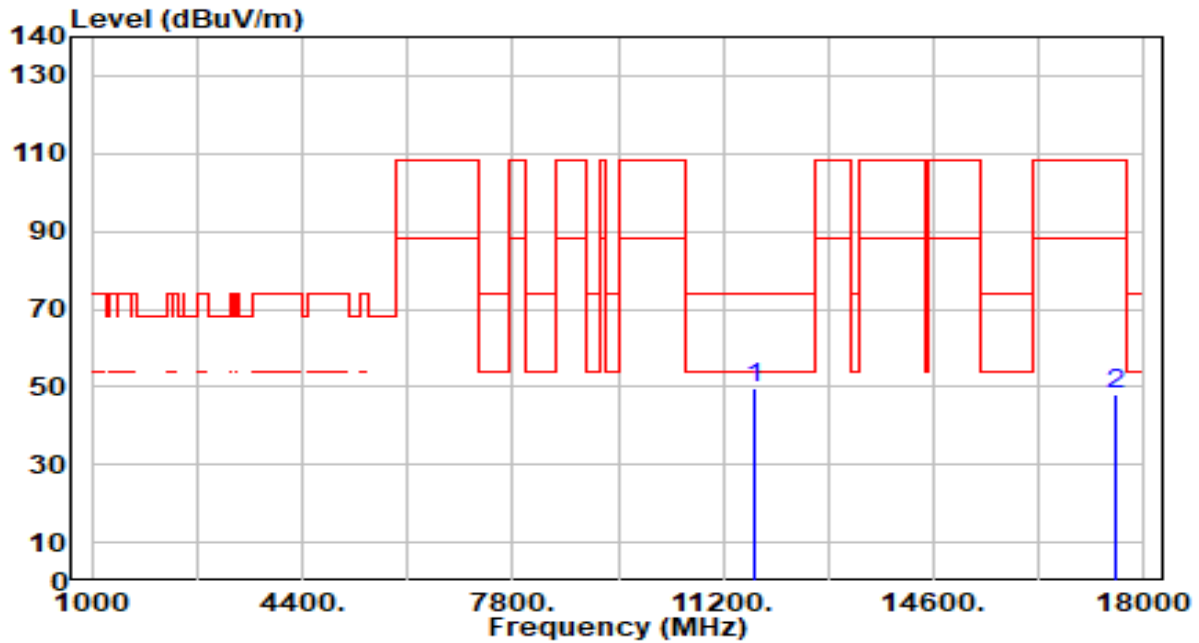


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	44.31	5.37	49.68	-24.32	74.00	300	124	Peak
2		17535.000	42.73	5.16	47.89	-60.31	108.20	300	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

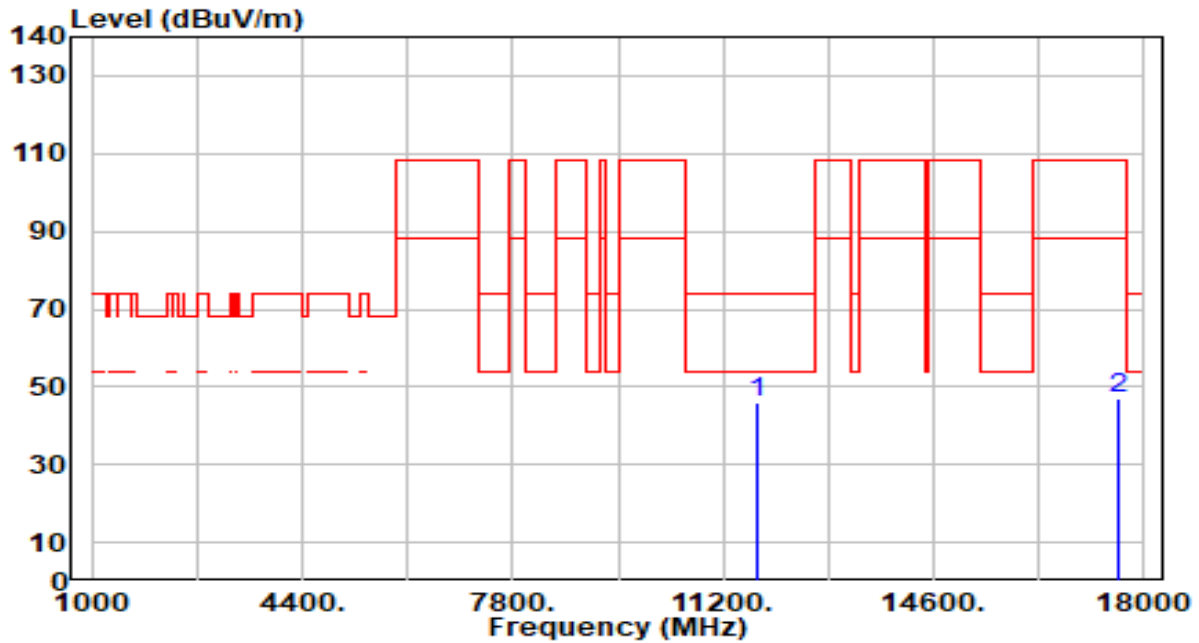


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	40.35	5.36	45.72	-28.28	74.00	300	66	Peak
2		17595.000	41.85	5.32	47.16	-61.04	108.20	300	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

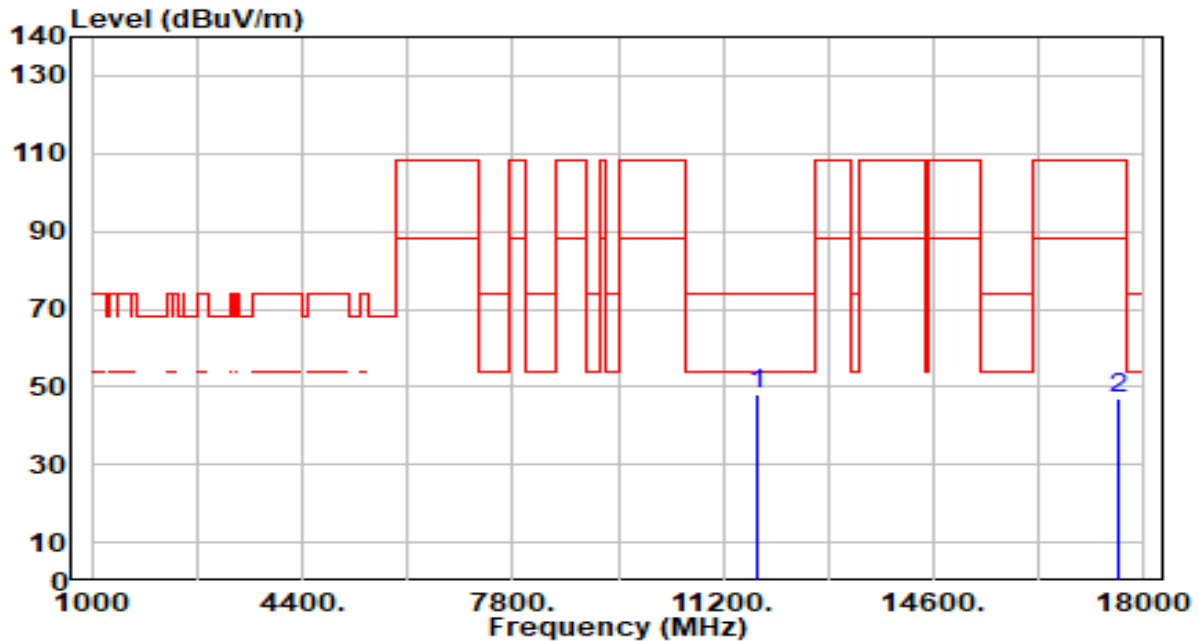


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.95	5.36	48.32	-25.68	74.00	300	139	Peak
2		17595.000	41.55	5.32	46.87	-61.33	108.20	300	264	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

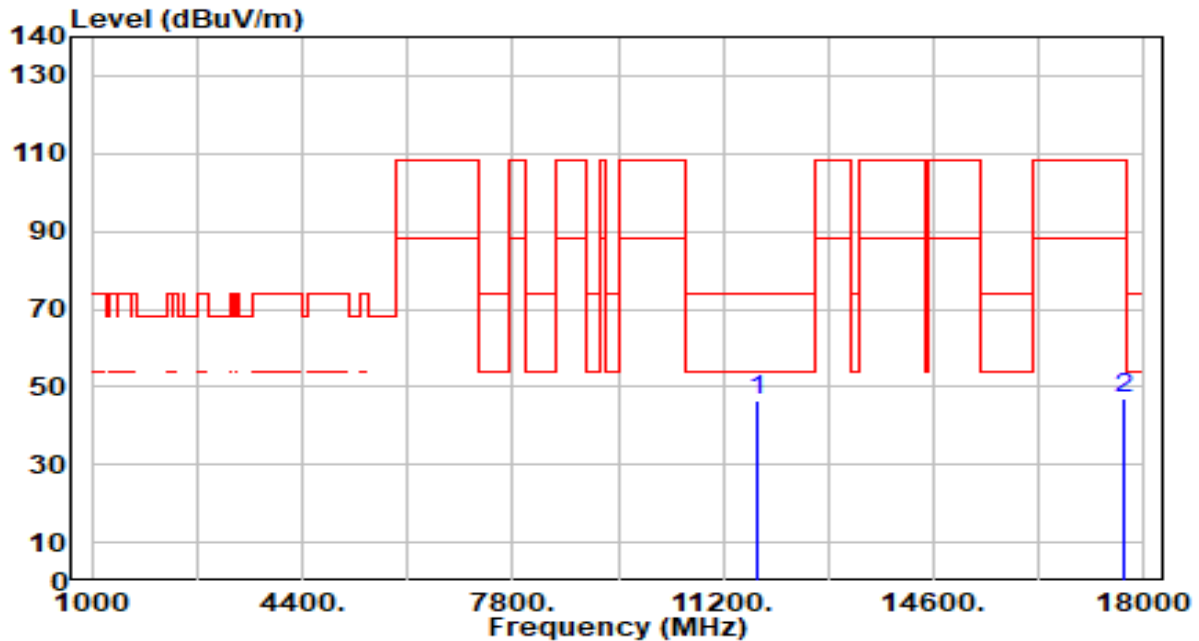


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	41.13	5.36	46.49	-27.51	74.00	300	11	Peak
2		17655.000	41.40	5.36	46.76	-61.44	108.20	300	56	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

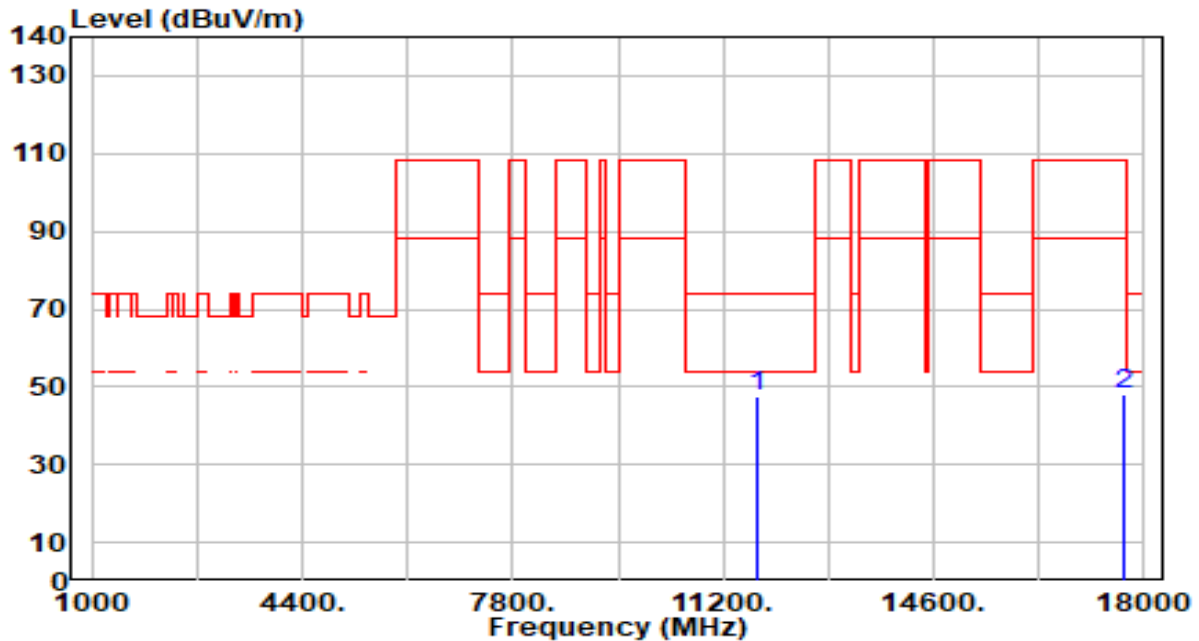


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	42.25	5.36	47.61	-26.39	74.00	300	226	Peak
2		17655.000	42.66	5.36	48.02	-60.18	108.20	300	272	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

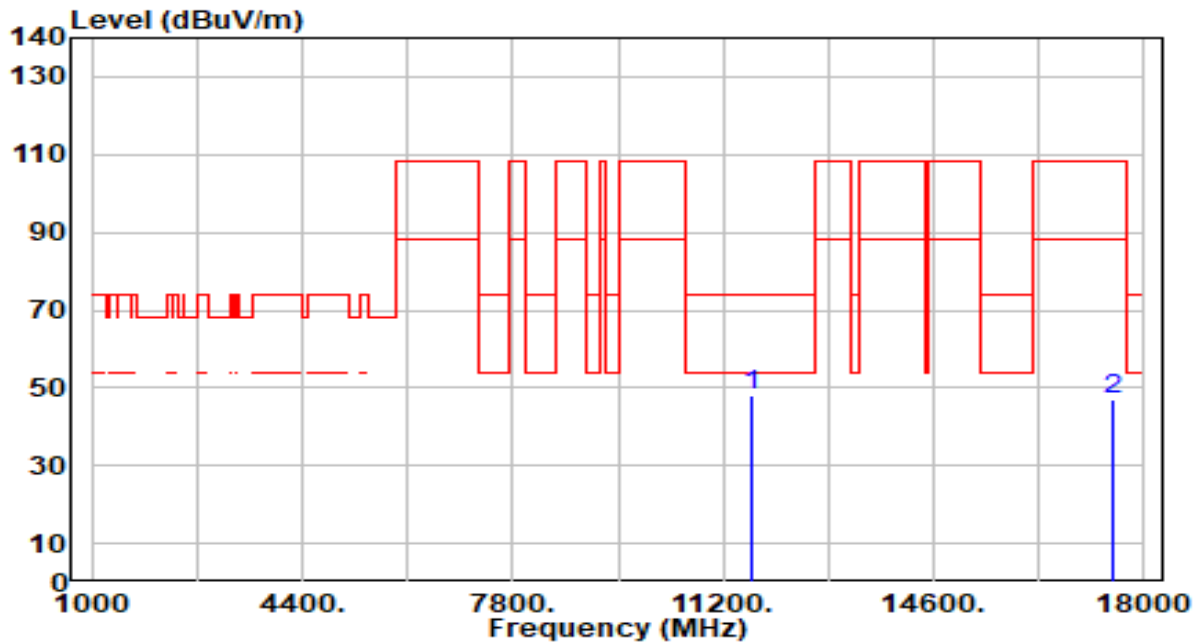


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	42.57	5.37	47.94	-26.06	74.00	300	36	Peak
2		17505.000	41.90	5.08	46.99	-61.21	108.20	300	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

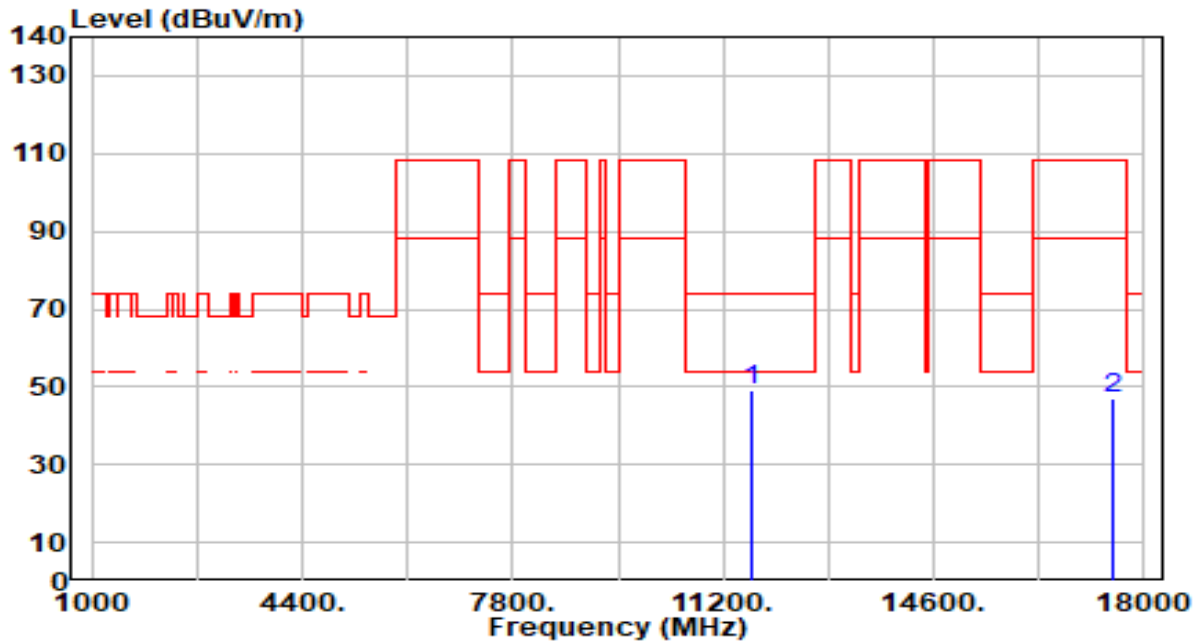


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	43.54	5.37	48.91	-25.09	74.00	300	117	Peak
2		17505.000	42.09	5.08	47.17	-61.03	108.20	300	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

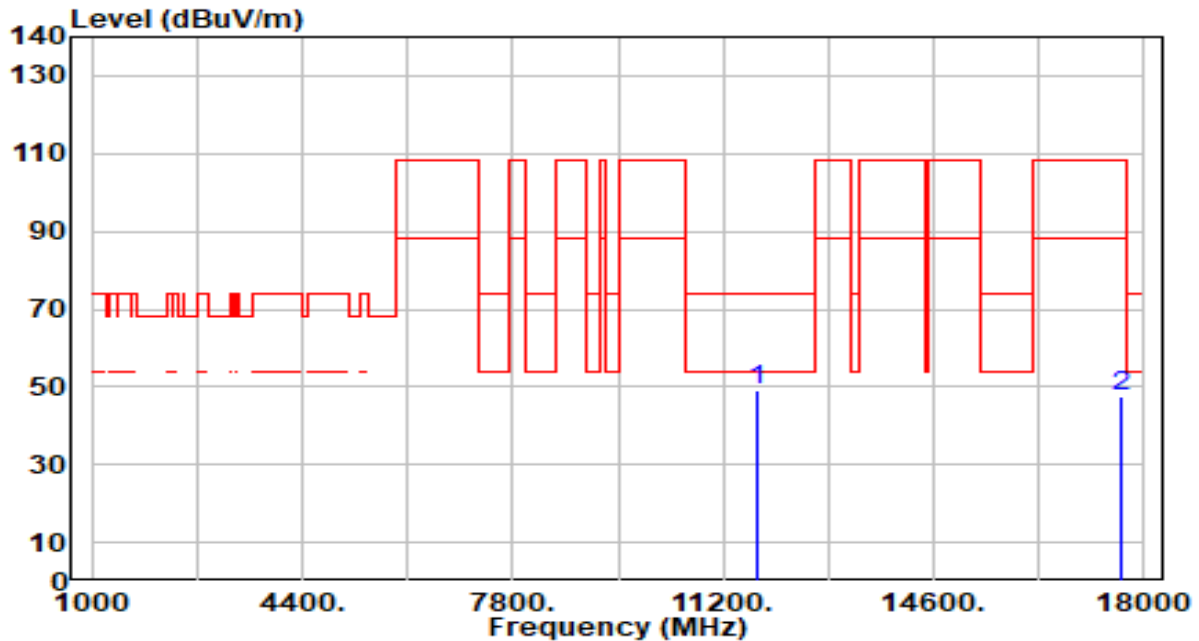


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	43.94	5.36	49.30	-24.70	74.00	300	36	Peak
2		17625.000	42.44	5.34	47.79	-60.41	108.20	300	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

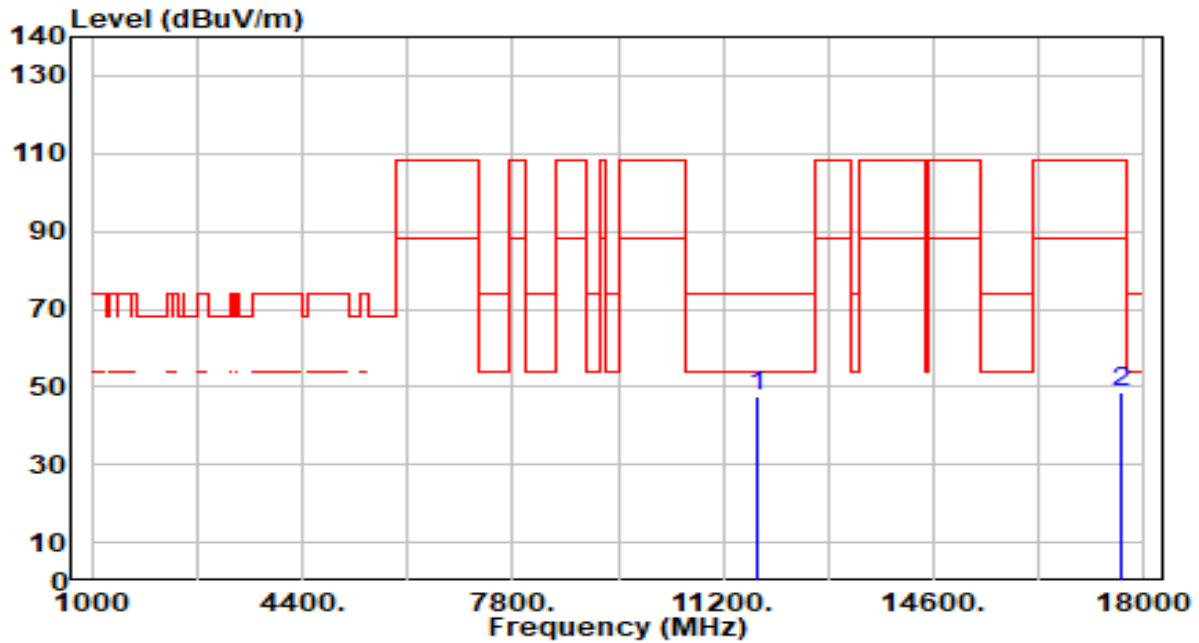


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	42.14	5.36	47.50	-26.50	74.00	300	117	Peak
2		17625.000	43.02	5.34	48.37	-59.83	108.20	300	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

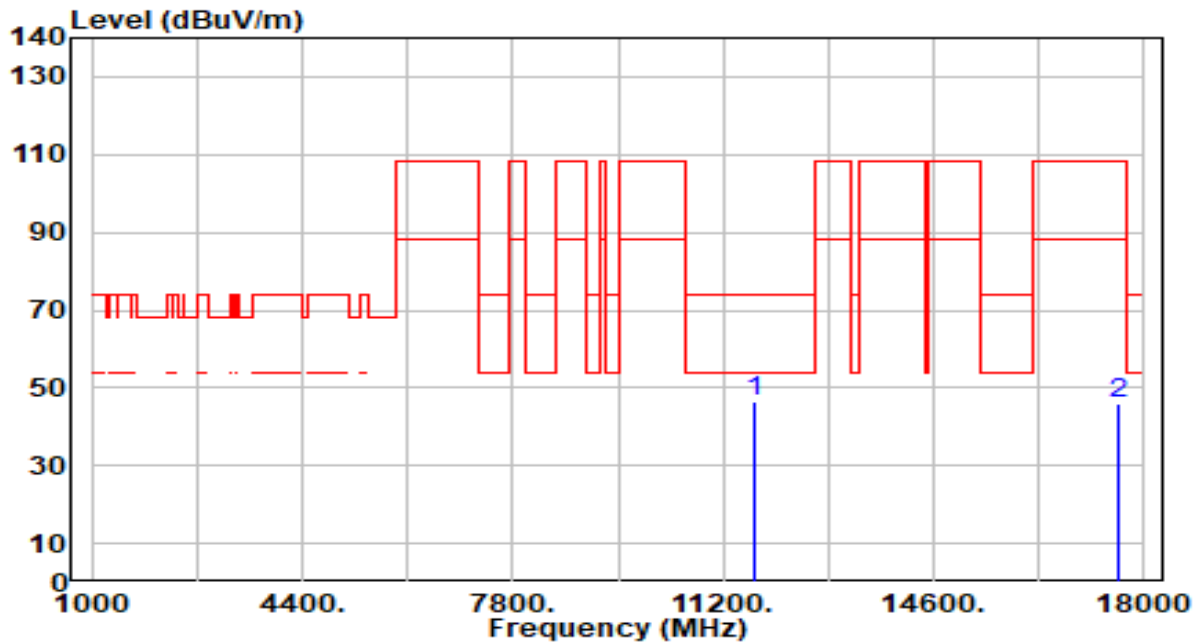


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	41.35	5.37	46.72	-27.28	74.00	300	185	Peak
2		17565.000	40.46	5.24	45.70	-62.50	108.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

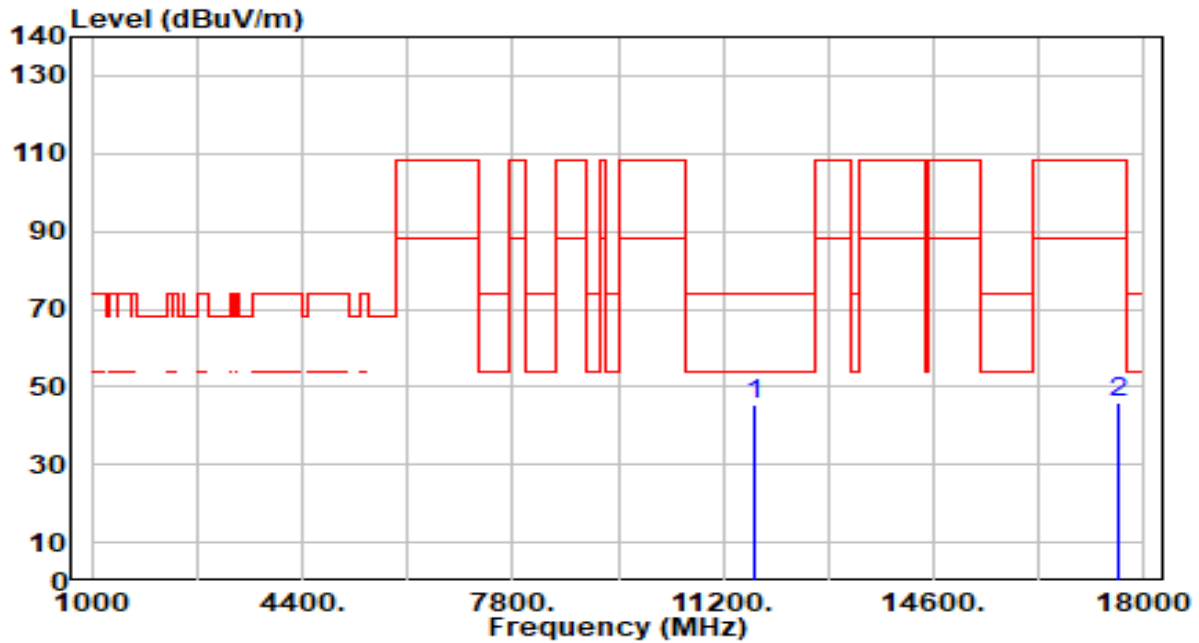


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	40.23	5.37	45.60	-28.40	74.00	300	321	Peak
2		17565.000	40.55	5.24	45.79	-62.41	108.20	300	123	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band4_CH 163_ANT 0+1	Test Voltage	AC 120V/60Hz

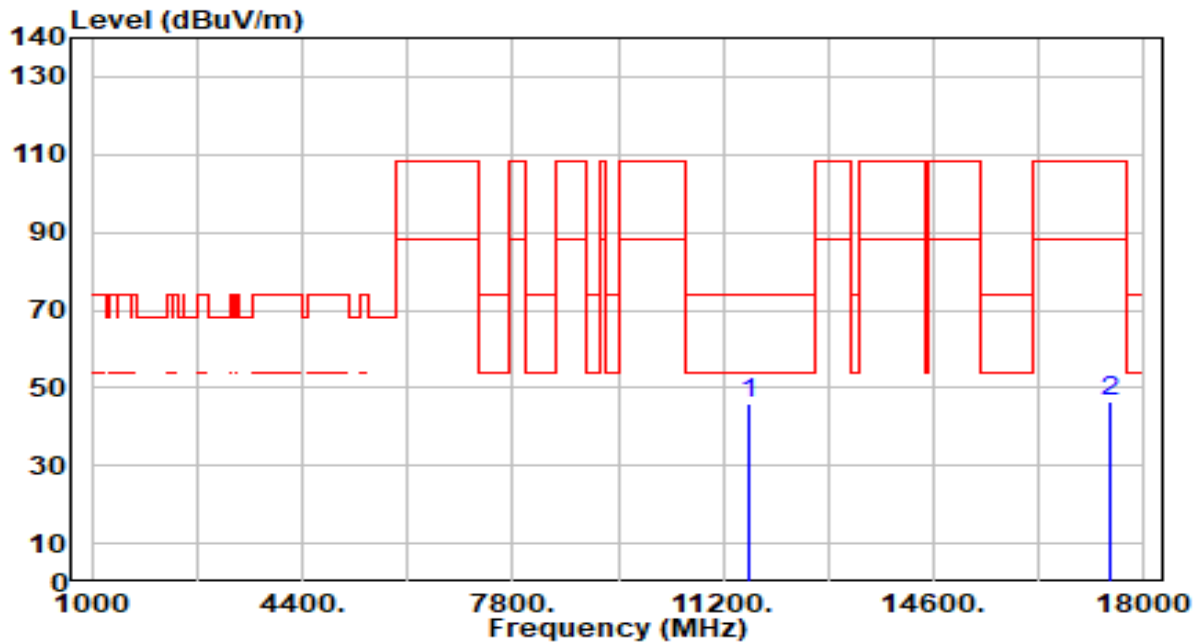


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	40.75	5.37	46.12	-27.88	74.00	300	125	Peak
2		17445.000	41.63	4.97	46.60	-61.60	108.20	300	153	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band4_CH 163_ANT 0+1	Test Voltage	AC 120V/60Hz

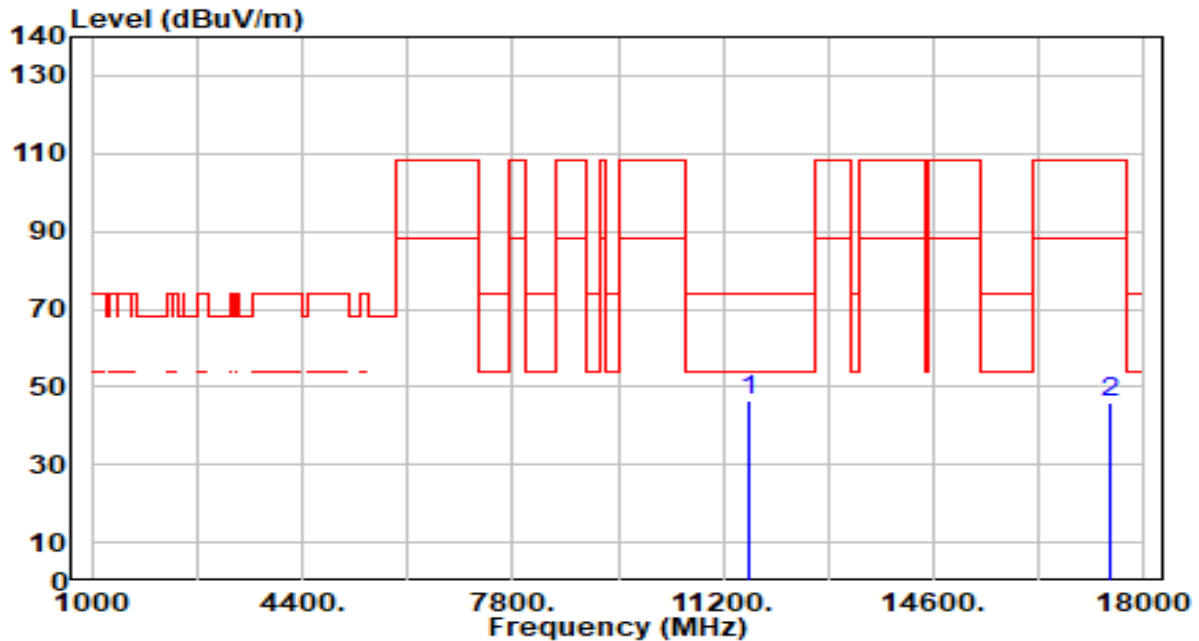


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	41.12	5.37	46.50	-27.50	74.00	300	242	Peak
2		17445.000	40.82	4.97	45.79	-62.41	108.20	300	298	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

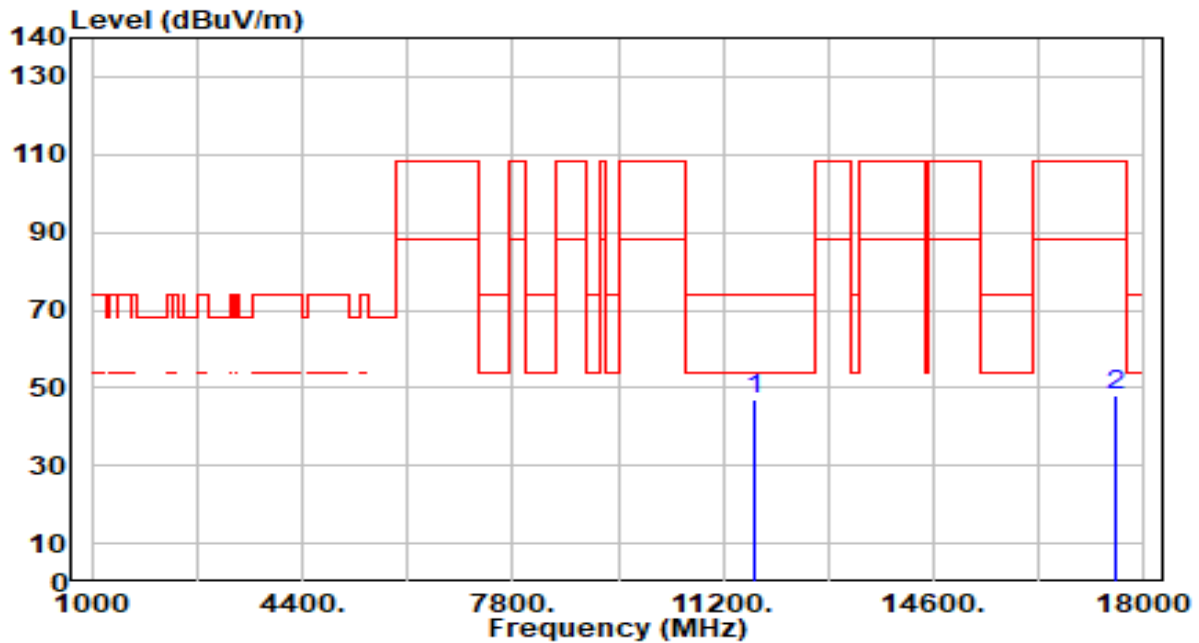


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	41.45	5.37	46.81	-27.19	74.00	300	215	Peak
2		17535.000	42.78	5.16	47.94	-60.26	108.20	300	209	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

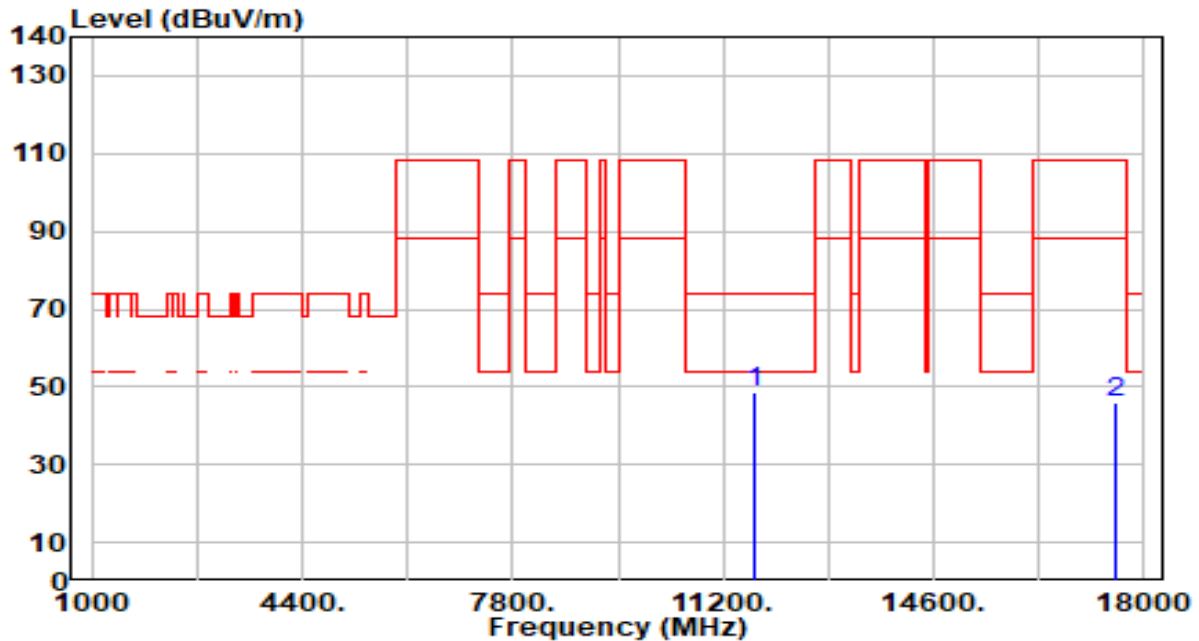


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11690.000	43.29	5.37	48.66	-25.34	74.00	300	51	Peak
2		17535.000	40.62	5.16	45.78	-62.42	108.20	300	107	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

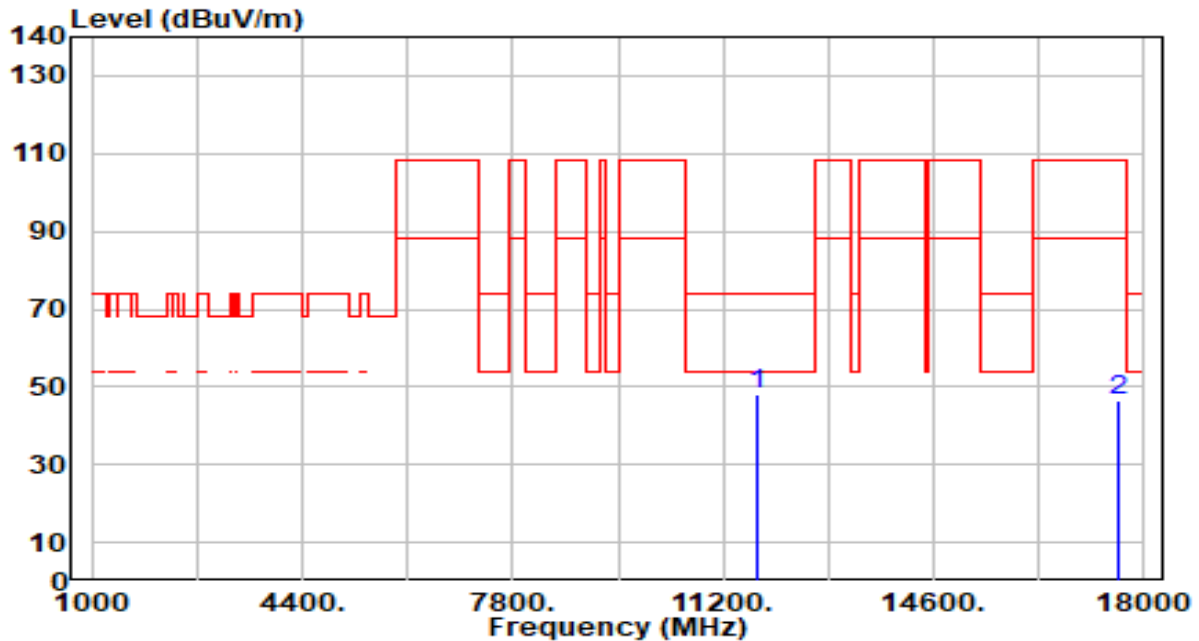


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.71	5.36	48.08	-25.92	74.00	300	161	Peak
2		17595.000	41.36	5.32	46.68	-61.52	108.20	300	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

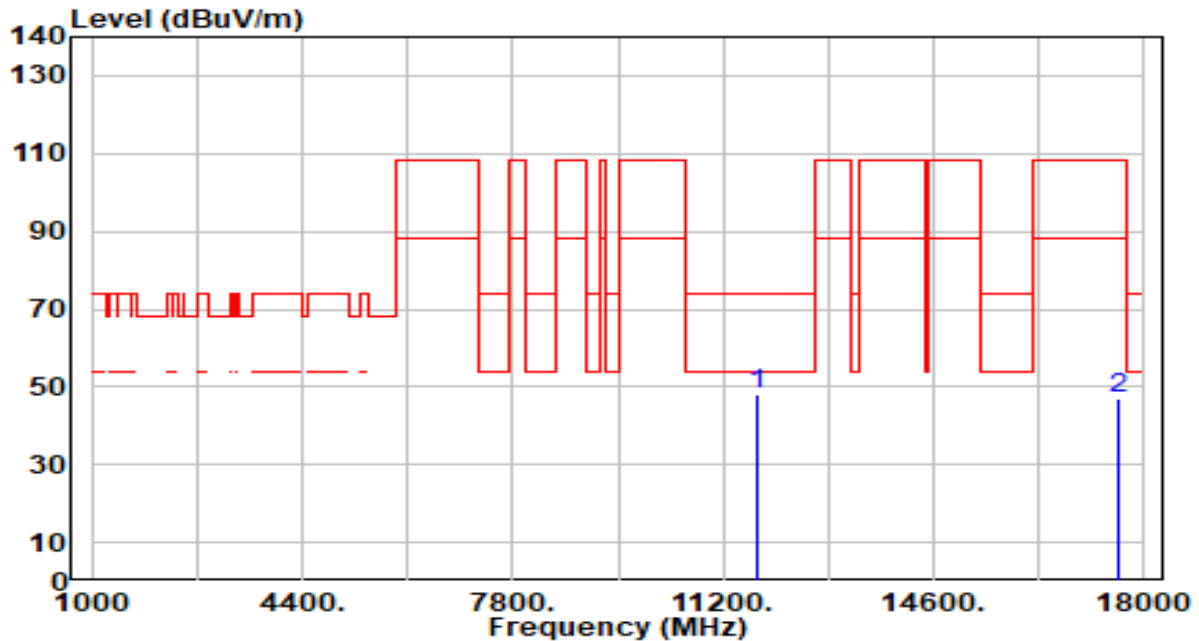


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11730.000	42.81	5.36	48.18	-25.82	74.00	300	235	Peak
2		17595.000	41.89	5.32	47.21	-60.99	108.20	300	258	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

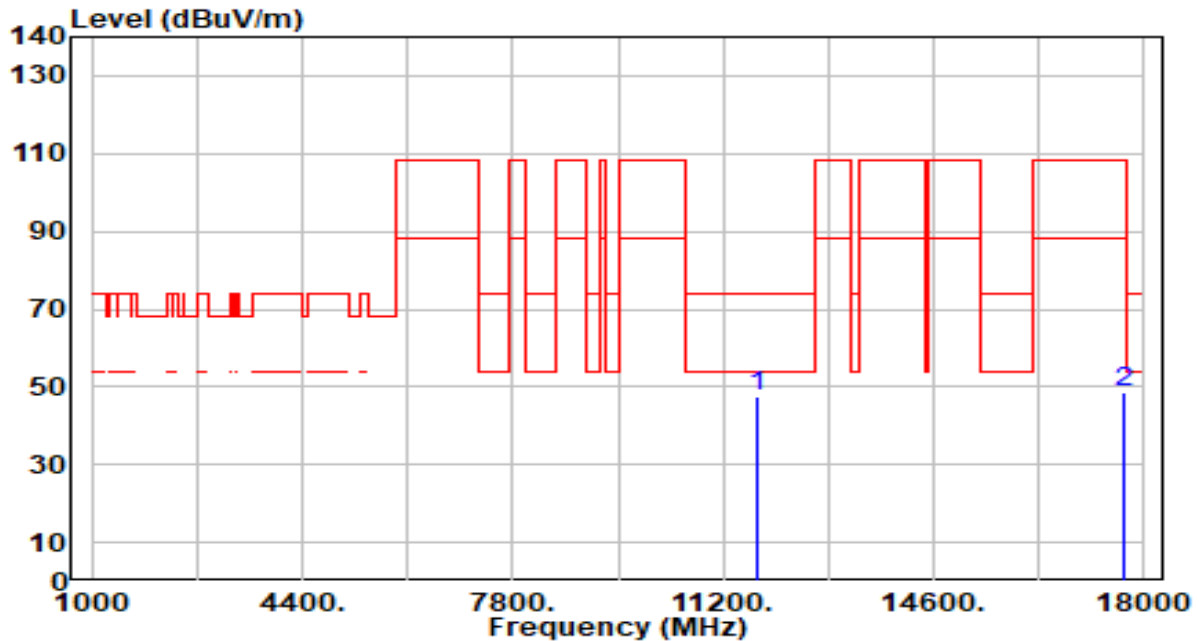


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	41.96	5.36	47.32	-26.68	74.00	300	204	Peak
2		17655.000	43.20	5.36	48.56	-59.64	108.20	300	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

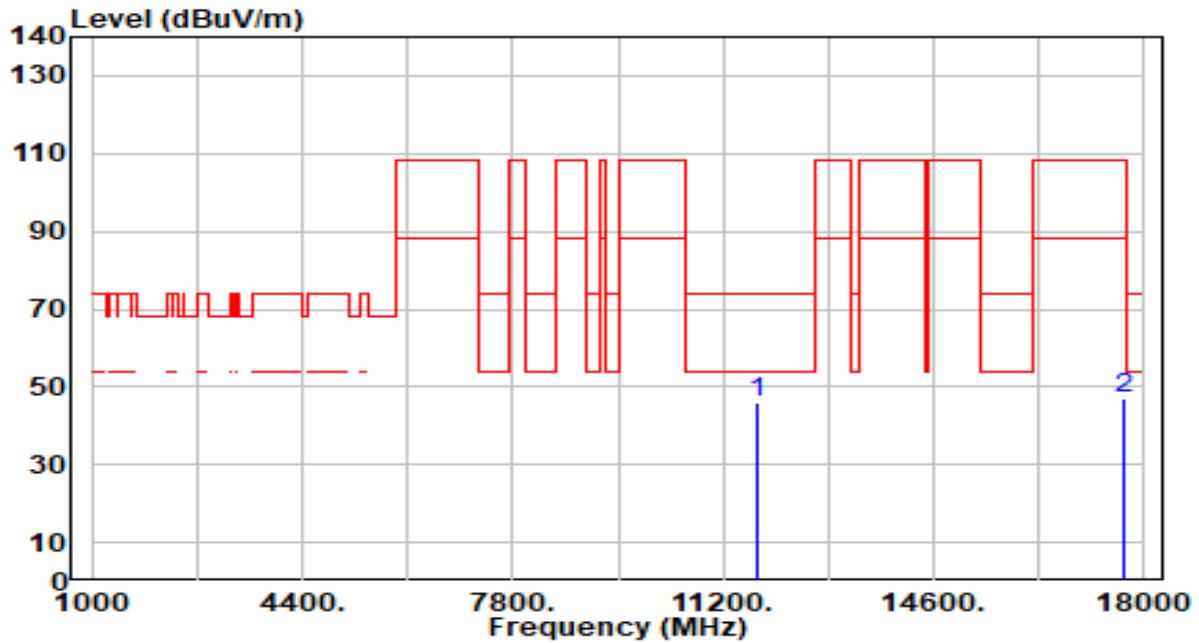


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11770.000	40.70	5.36	46.06	-27.94	74.00	300	61	Peak
2		17655.000	41.52	5.36	46.88	-61.32	108.20	300	95	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

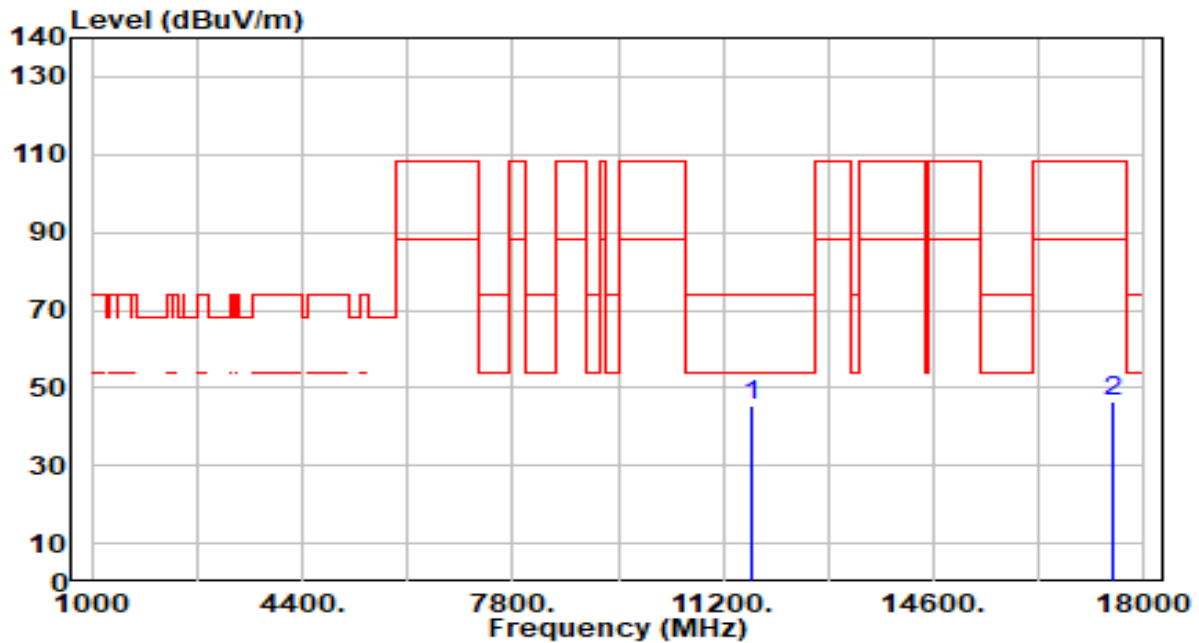


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	40.32	5.37	45.69	-28.31	74.00	300	205	Peak
2		17505.000	41.32	5.08	46.40	-61.80	108.20	300	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

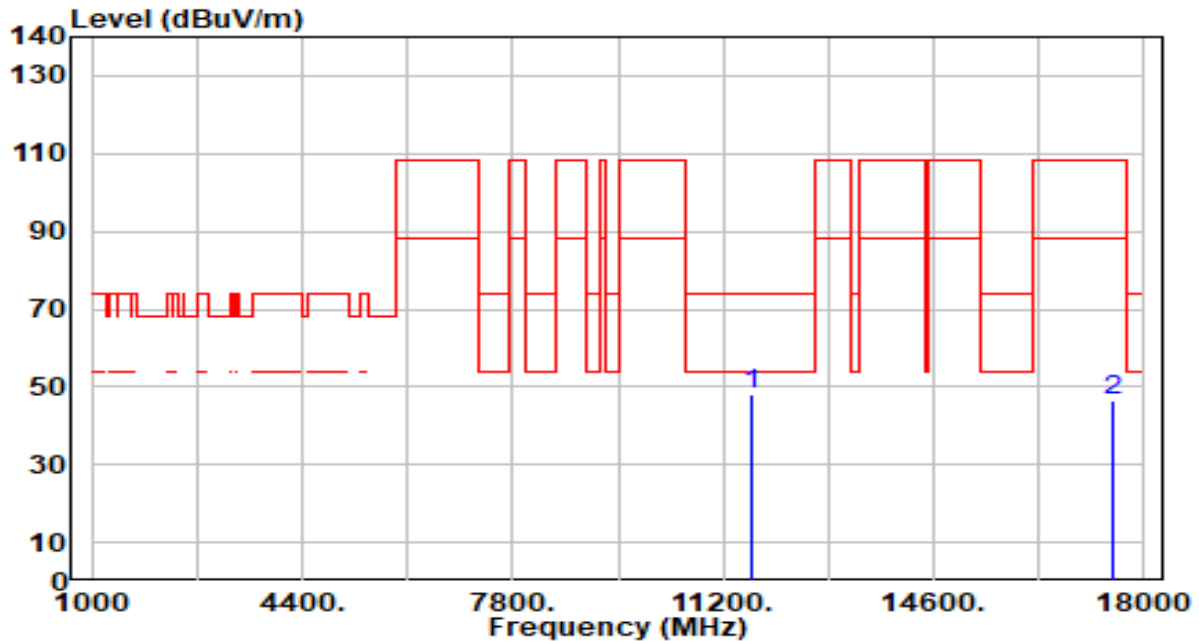


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11670.000	42.63	5.37	48.00	-26.00	74.00	300	59	Peak
2		17505.000	41.37	5.08	46.46	-61.74	108.20	300	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

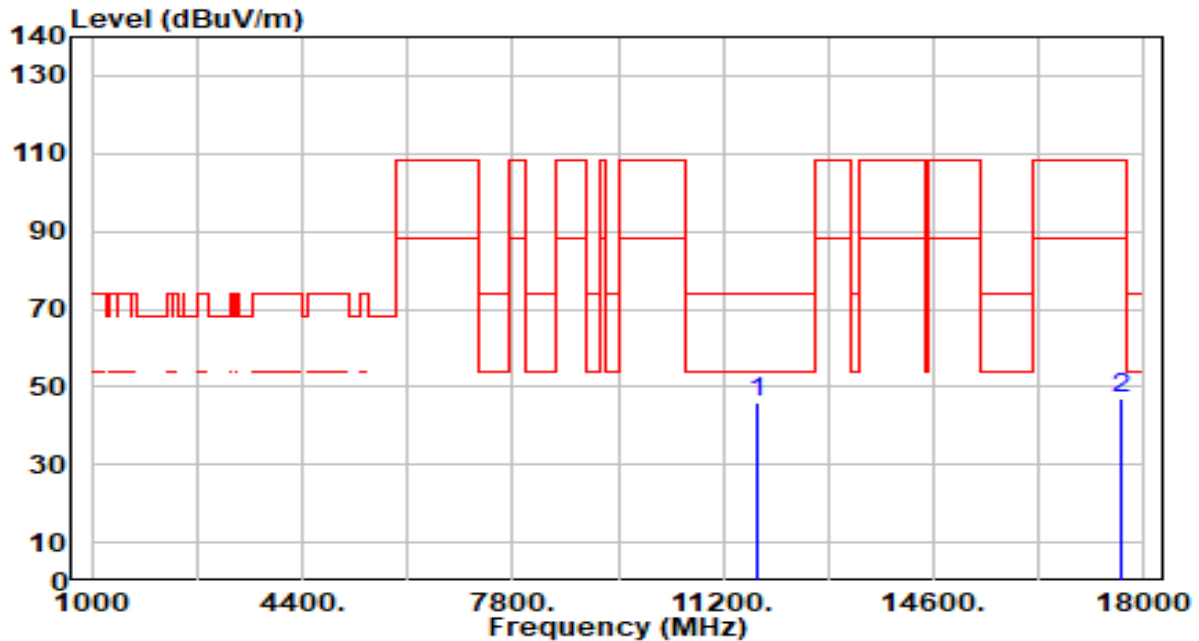


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	40.39	5.36	45.75	-28.25	74.00	300	360	Peak
2		17625.000	41.62	5.34	46.97	-61.23	108.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

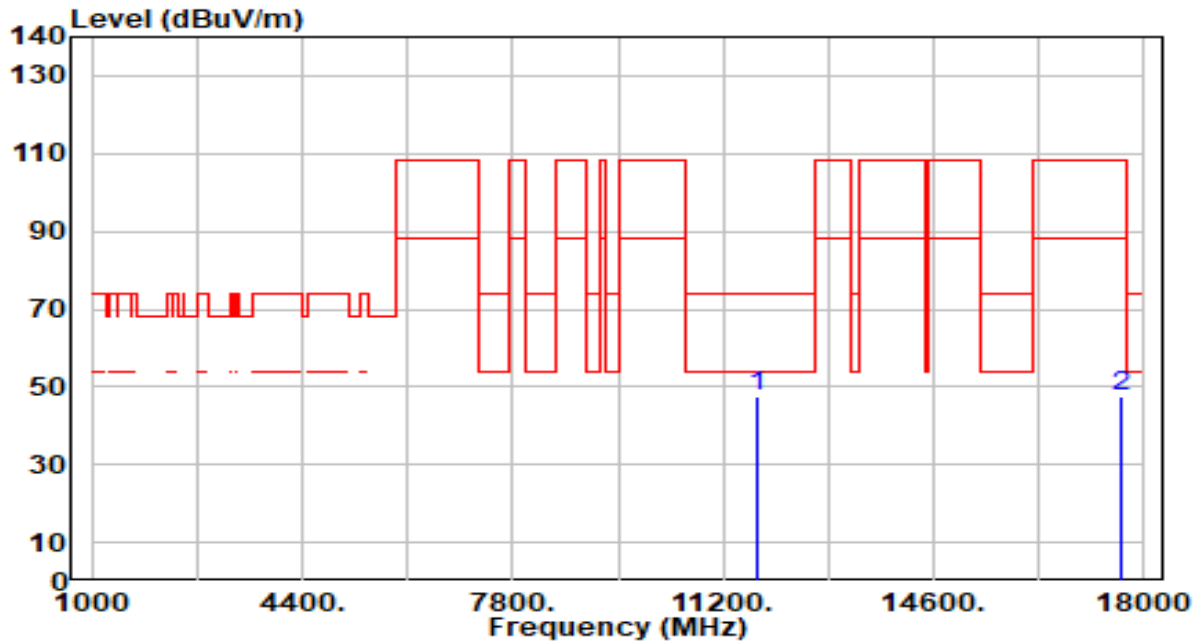


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11750.000	42.06	5.36	47.42	-26.58	74.00	300	174	Peak
2		17625.000	42.16	5.34	47.50	-60.70	108.20	300	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

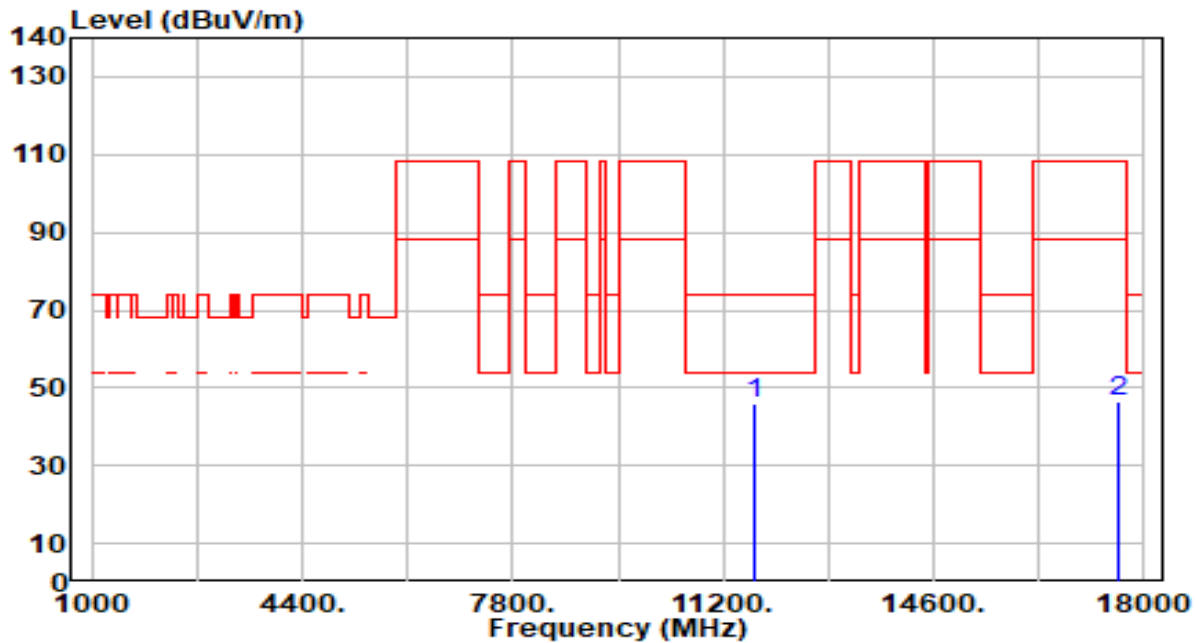


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	40.83	5.37	46.19	-27.81	74.00	300	324	Peak
2		17565.000	41.50	5.24	46.73	-61.47	108.20	300	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

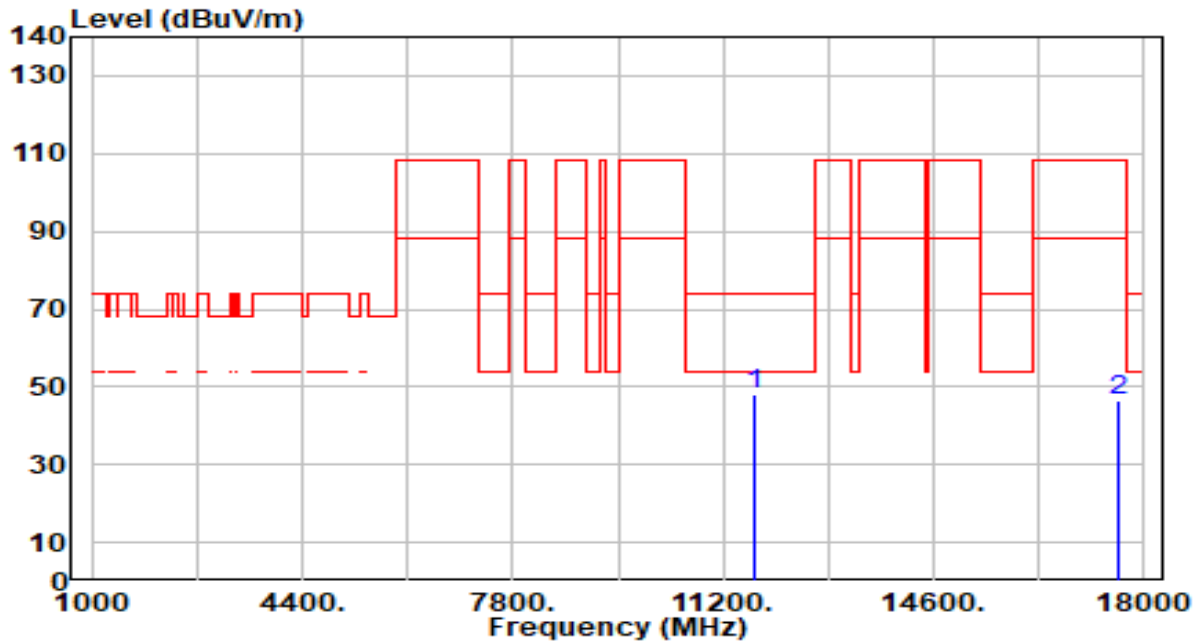


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11710.000	42.48	5.37	47.84	-26.16	74.00	300	360	Peak
2		17565.000	41.50	5.24	46.74	-61.46	108.20	300	306	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band4_CH 163_ANT 0+1	Test Voltage	AC 120V/60Hz

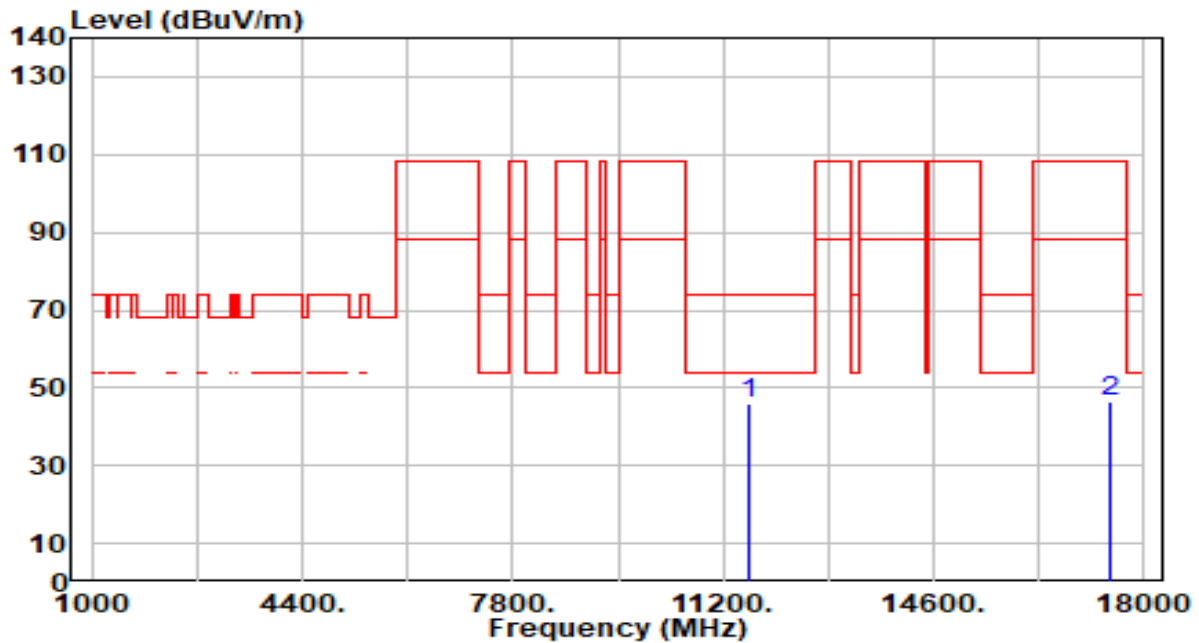


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	40.57	5.37	45.95	-28.05	74.00	300	230	Peak
2		17445.000	41.75	4.97	46.72	-61.48	108.20	300	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band4_CH 163_ANT 0+1	Test Voltage	AC 120V/60Hz

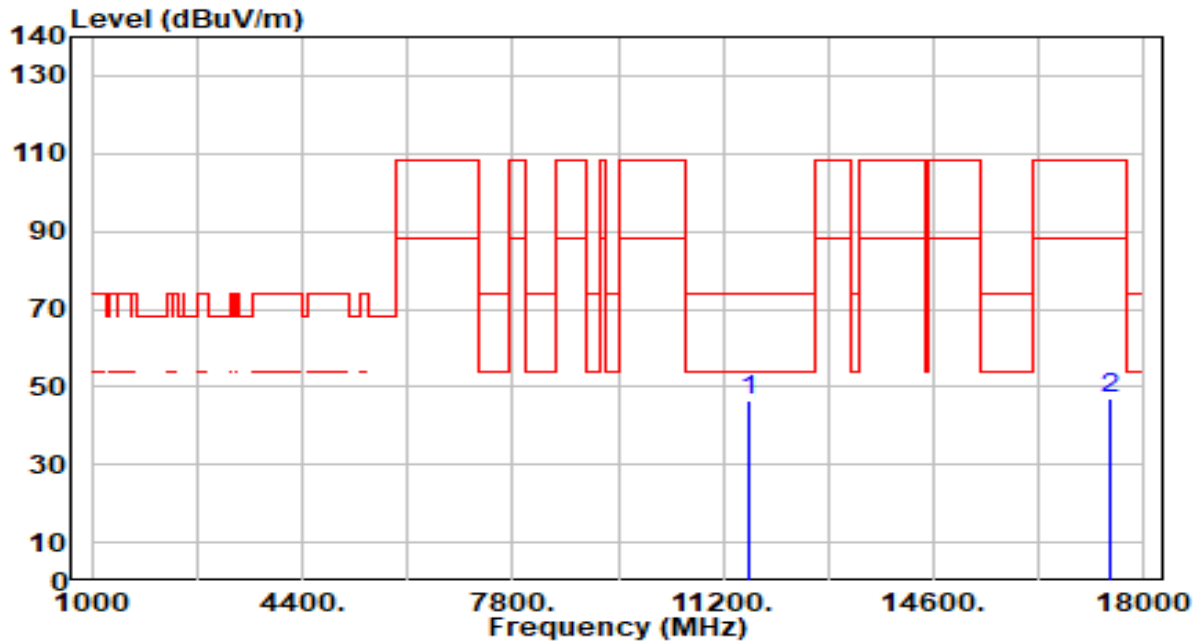


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11630.000	40.89	5.37	46.26	-27.74	74.00	300	235	Peak
2		17445.000	42.16	4.97	47.13	-61.07	108.20	300	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-13
Factor	BBHA 9170	Temp. / Humidity	21°C /45%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

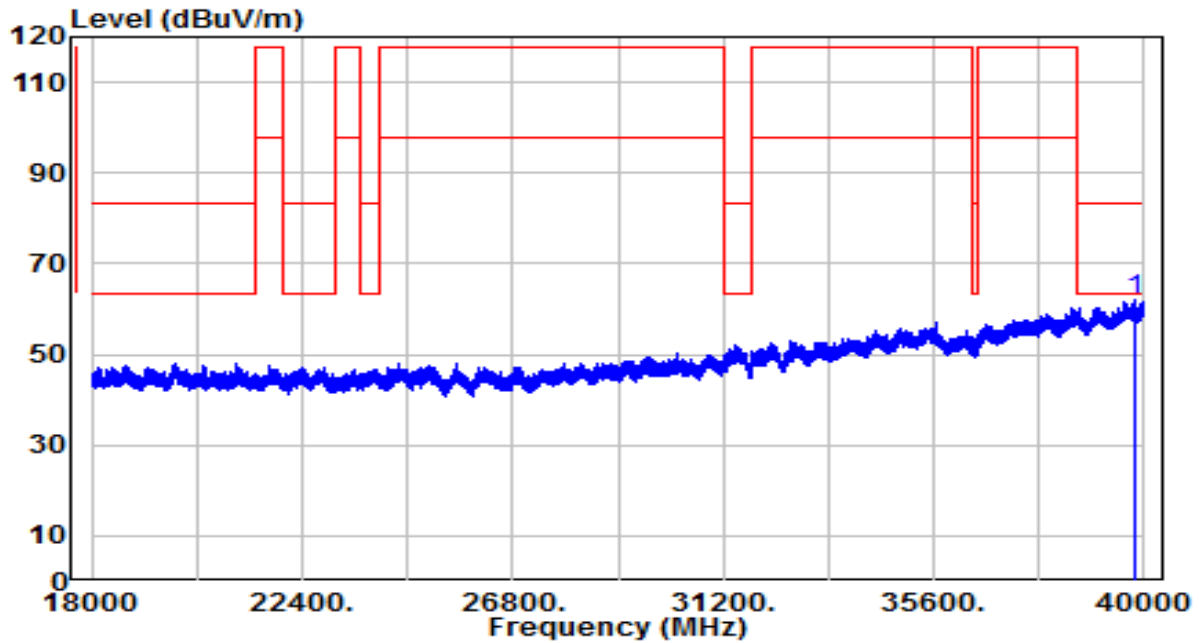


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39816.440	35.62	26.26	61.88	-21.62	83.50	150	286	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band Wi-Fi 7 Router	Date of Test	2025-01-13
Factor	BBHA 9170	Temp. / Humidity	21°C /45%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

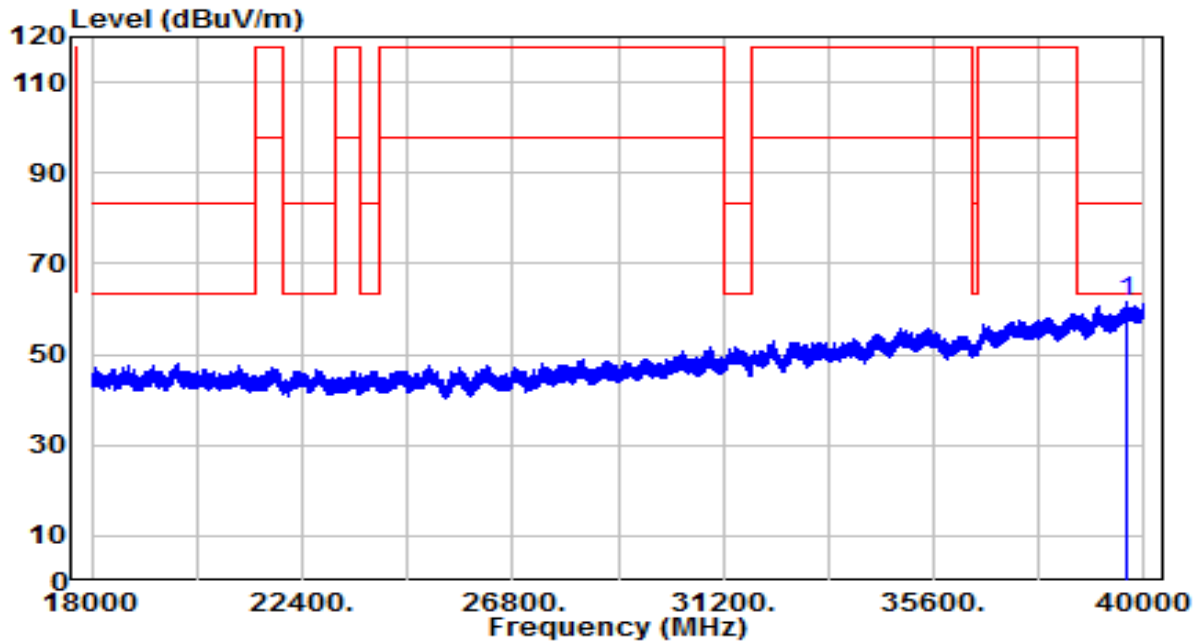

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39648.690	35.62	25.92	61.54	-21.96	83.50	150	201	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For an indoor access point, all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925GHz.

For indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

$E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for example, -27 dBm/MHz = 68.2 dB μ V/m.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2.Test Procedure Used

KDB 789033 D02v02r01- Section G


7.8.3.Test Setting

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

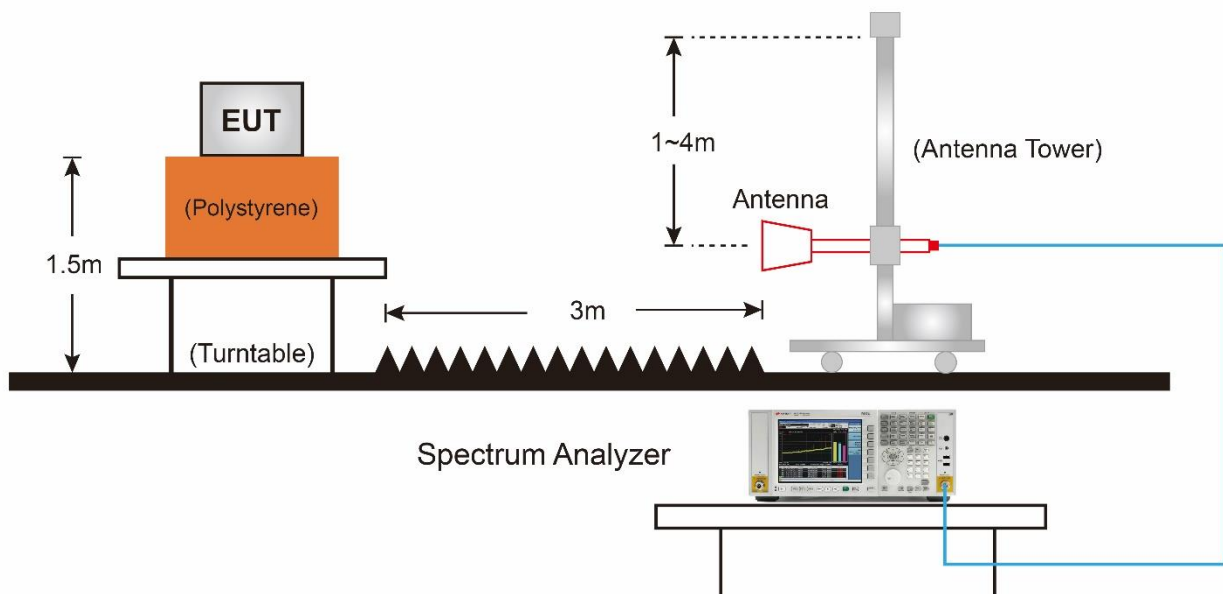7.8.4. Test Setup

7.8.5. Test Result

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

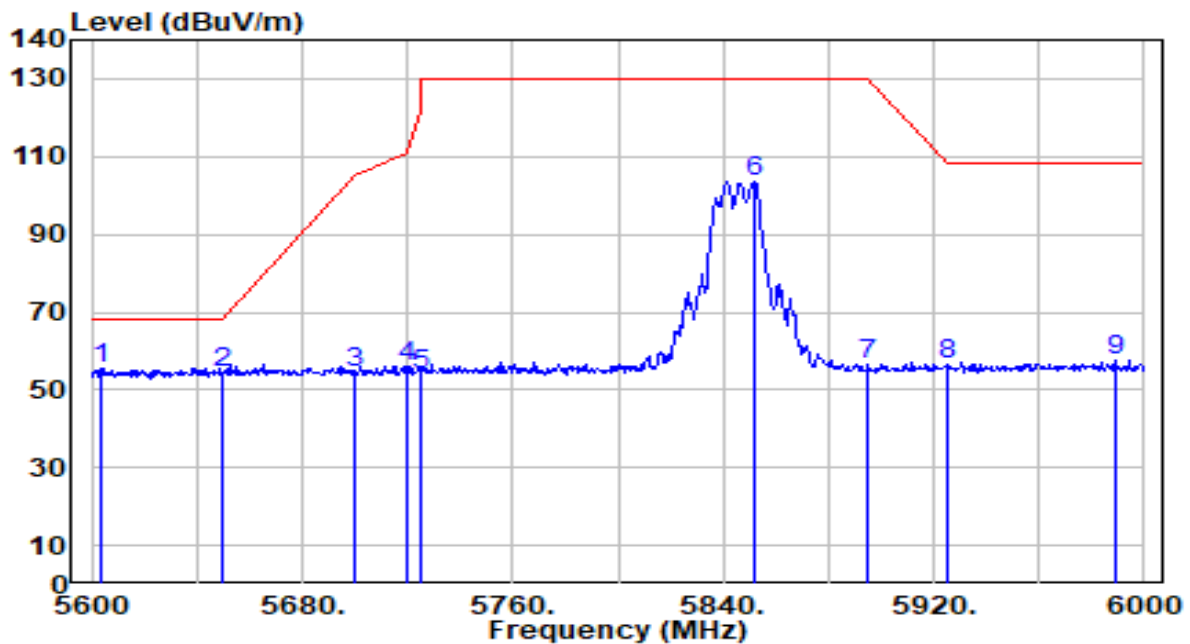


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5603.600	54.27	1.32	55.60	-12.60	68.20	100	231	Peak
2		5650.000	53.08	1.54	54.62	-13.58	68.20	100	231	Peak
3		5700.000	52.40	1.78	54.18	-51.02	105.20	100	231	Peak
4		5720.000	53.99	1.87	55.86	-54.94	110.80	100	231	Peak
5		5725.000	52.19	1.89	54.08	-68.12	122.20	100	231	Peak
6		5852.000	101.30	2.25	103.56	N/A	N/A	100	231	Peak
7		5895.000	54.30	2.26	56.57	-73.63	130.20	100	231	Peak
8		5925.000	54.46	2.27	56.72	-51.48	108.20	100	231	Peak
9		5989.600	55.35	2.28	57.63	-50.57	108.20	100	231	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

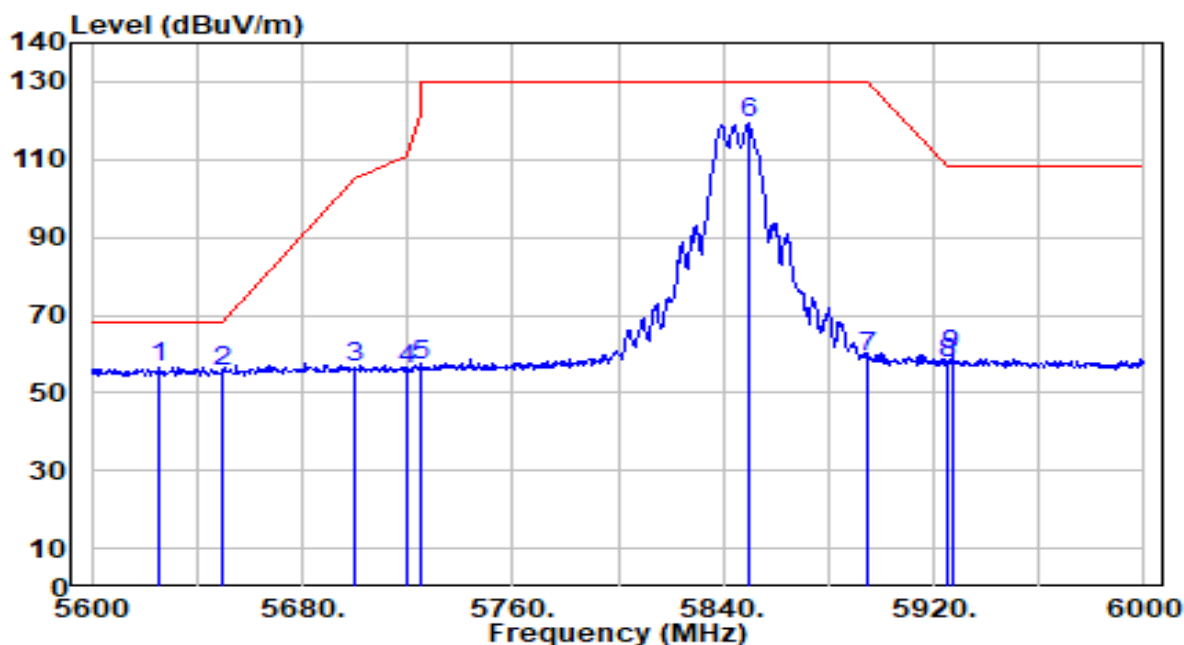


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.000	55.16	1.43	56.59	-11.61	68.20	200	245	Peak
2		5650.000	54.18	1.54	55.72	-12.48	68.20	200	245	Peak
3		5700.000	54.52	1.78	56.30	-48.90	105.20	200	245	Peak
4		5720.000	53.89	1.87	55.76	-55.04	110.80	200	245	Peak
5		5725.000	55.25	1.89	57.15	-65.05	122.20	200	245	Peak
6		5849.600	117.02	2.25	119.27	N/A	N/A	200	245	Peak
7		5895.000	56.77	2.26	59.03	-71.17	130.20	200	245	Peak
8		5925.000	55.35	2.27	57.62	-50.58	108.20	200	245	Peak
9		5926.800	57.25	2.27	59.52	-48.68	108.20	200	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

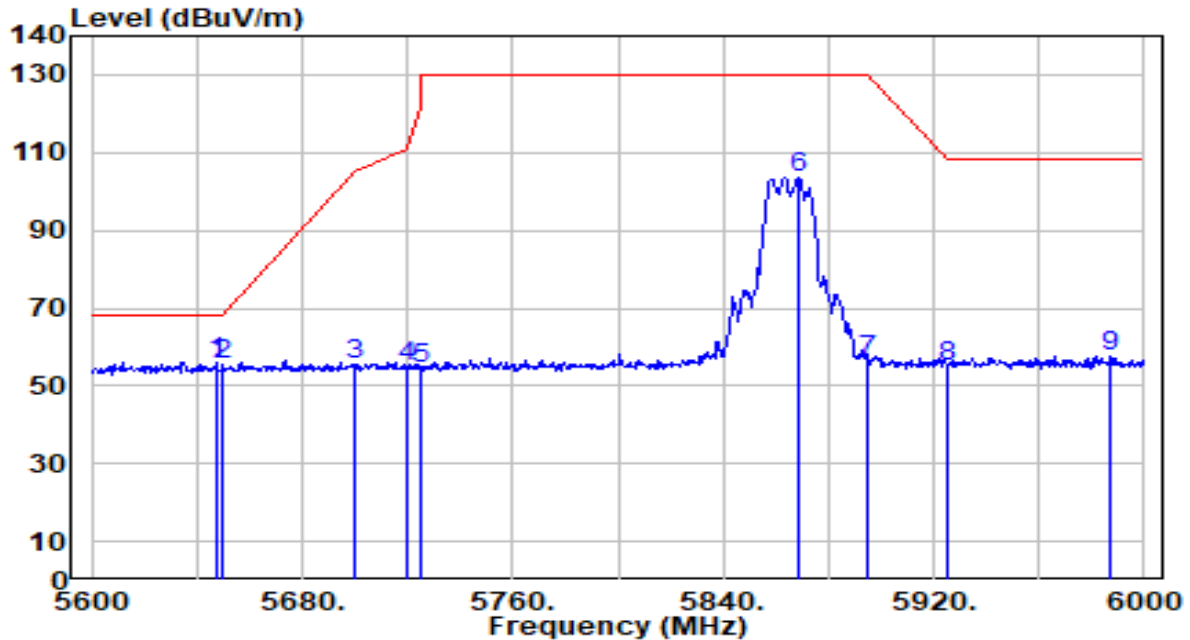


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.200	54.53	1.53	56.05	-12.15	68.20	100	178	Peak
2		5650.000	54.18	1.54	55.72	-12.48	68.20	100	178	Peak
3		5700.000	53.72	1.78	55.50	-49.70	105.20	100	178	Peak
4		5720.000	53.02	1.87	54.89	-55.91	110.80	100	178	Peak
5		5725.000	52.45	1.89	54.35	-67.85	122.20	100	178	Peak
6		5868.800	101.30	2.26	103.56	N/A	N/A	100	178	Peak
7		5895.000	54.40	2.26	56.66	-73.54	130.20	100	178	Peak
8		5925.000	52.85	2.27	55.12	-53.08	108.20	100	178	Peak
9		5987.200	55.22	2.28	57.50	-50.70	108.20	100	178	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

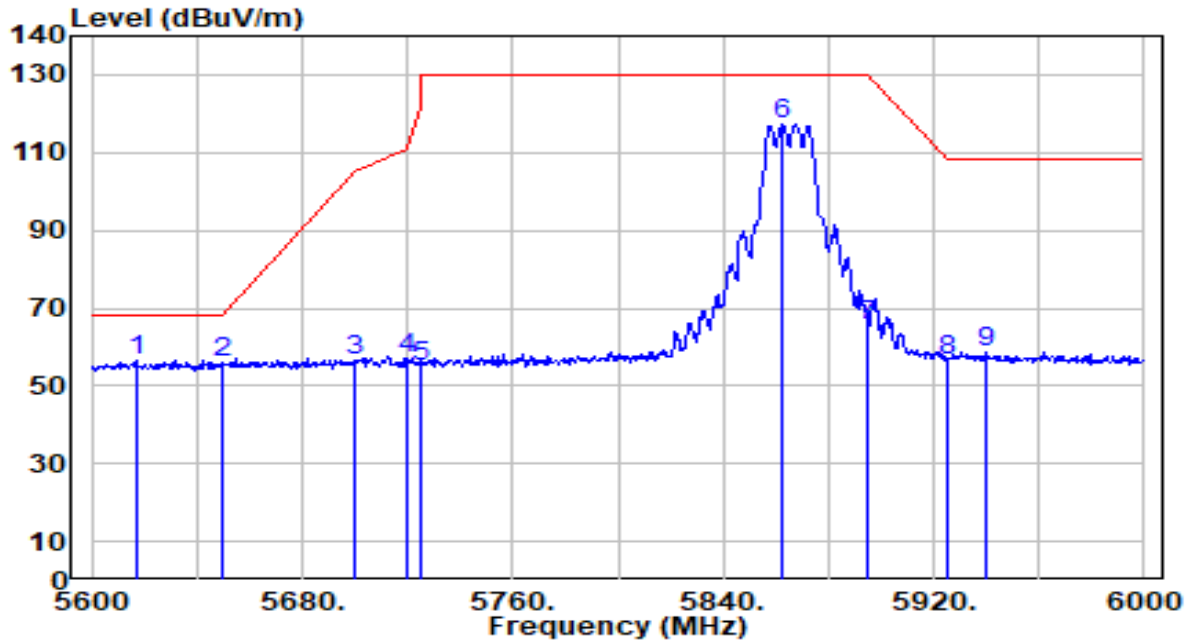


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5616.800	55.09	1.39	56.48	-11.72	68.20	180	175	Peak
2		5650.000	54.32	1.54	55.86	-12.34	68.20	180	175	Peak
3		5700.000	54.94	1.78	56.71	-48.49	105.20	180	175	Peak
4		5720.000	54.95	1.87	56.82	-53.98	110.80	180	175	Peak
5		5725.000	52.79	1.89	54.69	-67.51	122.20	180	175	Peak
6		5862.800	115.16	2.26	117.42	N/A	N/A	180	175	Peak
7		5895.000	63.46	2.26	65.72	-64.48	130.20	180	175	Peak
8		5925.000	54.31	2.27	56.57	-51.63	108.20	180	175	Peak
9		5939.600	56.32	2.27	58.59	-49.61	108.20	180	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

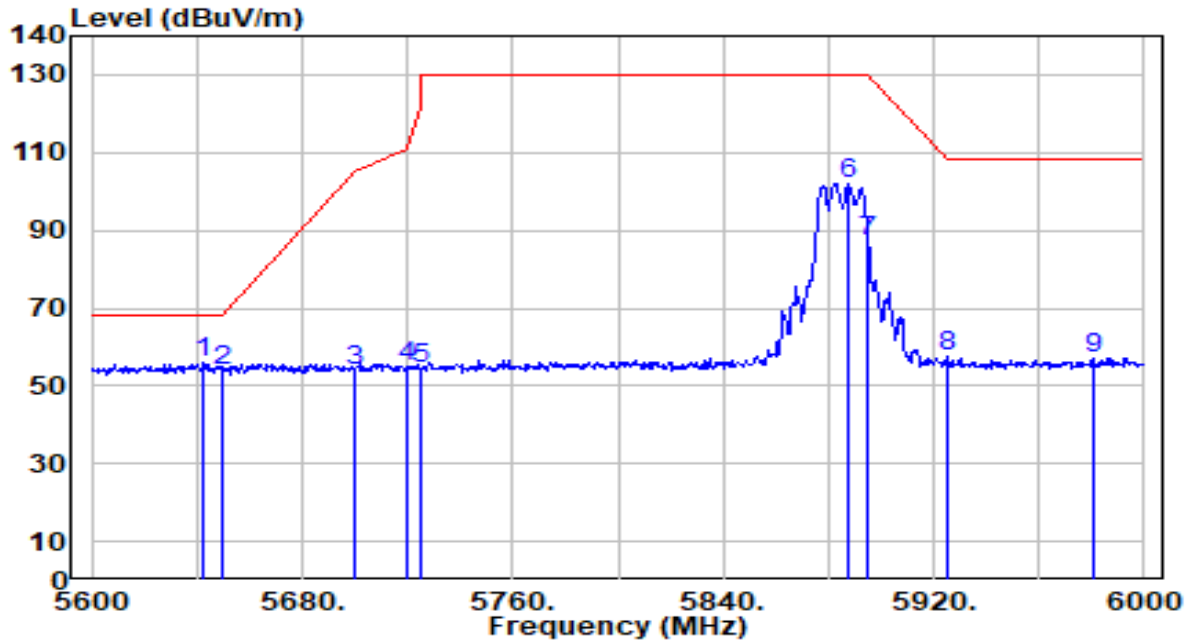


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.800	54.29	1.51	55.80	-12.40	68.20	100	302	Peak
2		5650.000	52.27	1.54	53.81	-14.39	68.20	100	302	Peak
3		5700.000	52.31	1.78	54.09	-51.11	105.20	100	302	Peak
4		5720.000	52.94	1.87	54.81	-55.99	110.80	100	302	Peak
5		5725.000	52.62	1.89	54.51	-67.69	122.20	100	302	Peak
6		5887.600	99.84	2.26	102.10	N/A	N/A	100	302	Peak
7		5895.000	84.78	2.26	87.04	-43.16	130.20	100	302	Peak
8		5925.000	55.27	2.27	57.53	-50.67	108.20	100	302	Peak
9		5980.400	54.80	2.28	57.07	-51.13	108.20	100	302	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11a_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

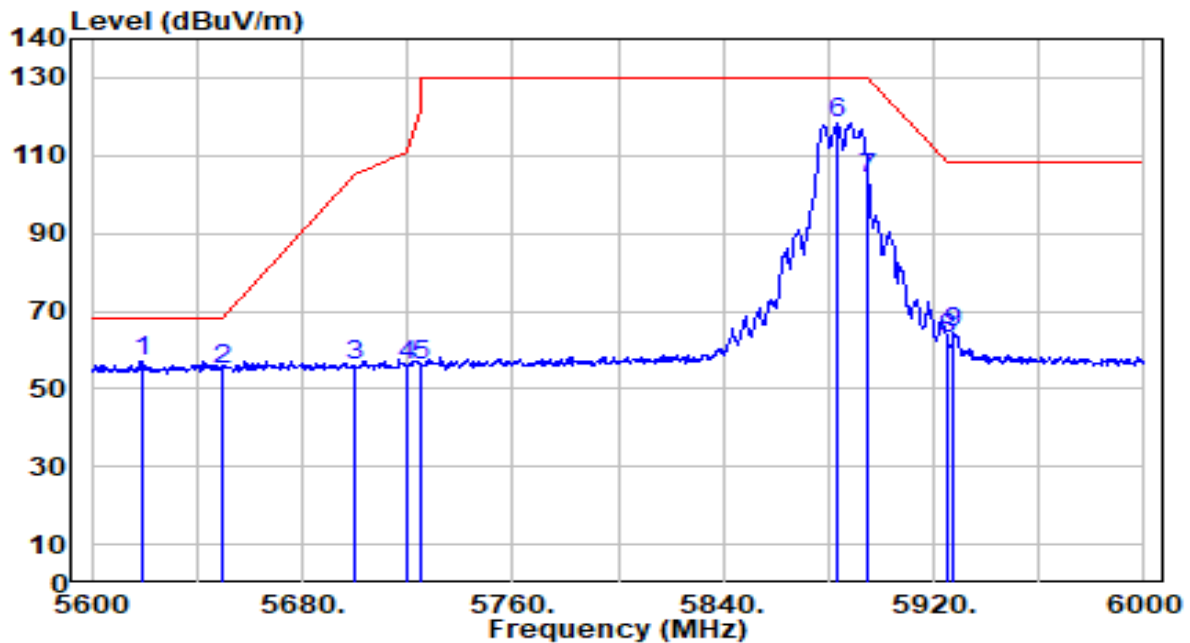


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5618.800	55.78	1.40	57.18	-11.02	68.20	181	110	Peak
2		5650.000	53.62	1.54	55.17	-13.03	68.20	181	110	Peak
3		5700.000	54.03	1.78	55.80	-49.40	105.20	181	110	Peak
4		5720.000	54.12	1.87	55.99	-54.81	110.80	181	110	Peak
5		5725.000	54.04	1.89	55.93	-66.27	122.20	181	110	Peak
6		5883.200	116.08	2.26	118.34	N/A	N/A	181	110	Peak
7		5895.000	102.03	2.26	104.29	-25.91	130.20	181	110	Peak
8		5925.000	60.73	2.27	63.00	-45.20	108.20	181	110	Peak
9		5927.600	62.16	2.27	64.43	-43.77	108.20	181	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

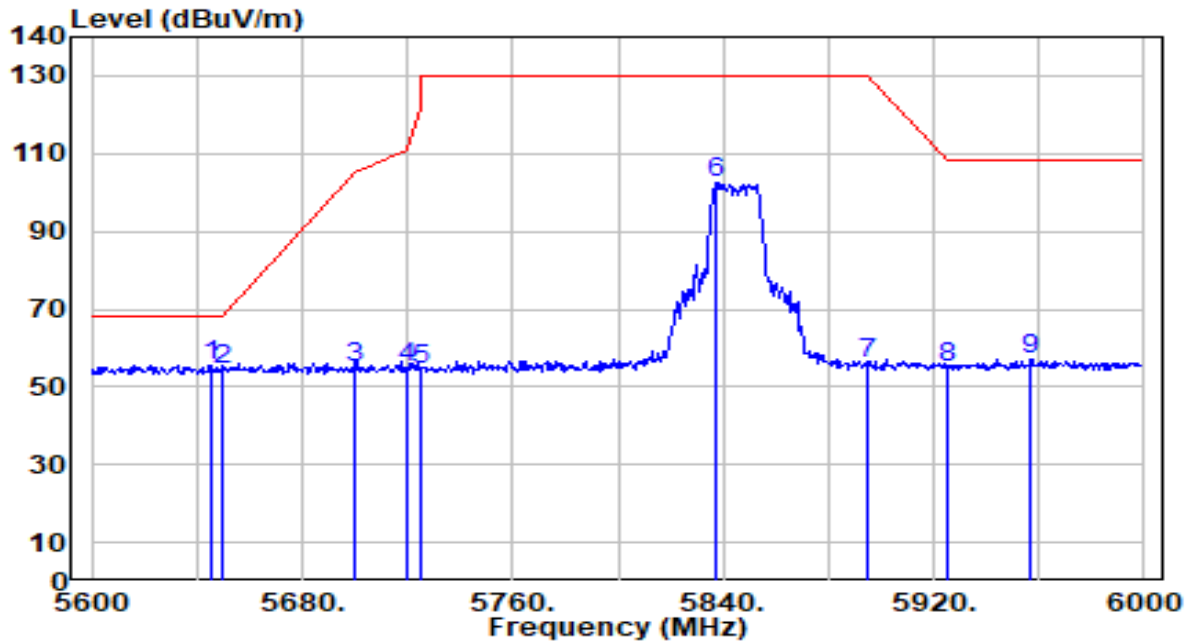


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.600	54.16	1.52	55.68	-12.52	68.20	100	20	Peak
2		5650.000	52.66	1.54	54.20	-14.00	68.20	100	20	Peak
3		5700.000	53.15	1.78	54.93	-50.27	105.20	100	20	Peak
4		5720.000	52.88	1.87	54.75	-56.05	110.80	100	20	Peak
5		5725.000	52.44	1.89	54.33	-67.87	122.20	100	20	Peak
6		5837.200	100.43	2.25	102.68	N/A	N/A	100	20	Peak
7		5895.000	53.53	2.26	55.79	-74.41	130.20	100	20	Peak
8		5925.000	52.53	2.27	54.80	-53.40	108.20	100	20	Peak
9		5956.800	54.99	2.27	57.26	-50.94	108.20	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

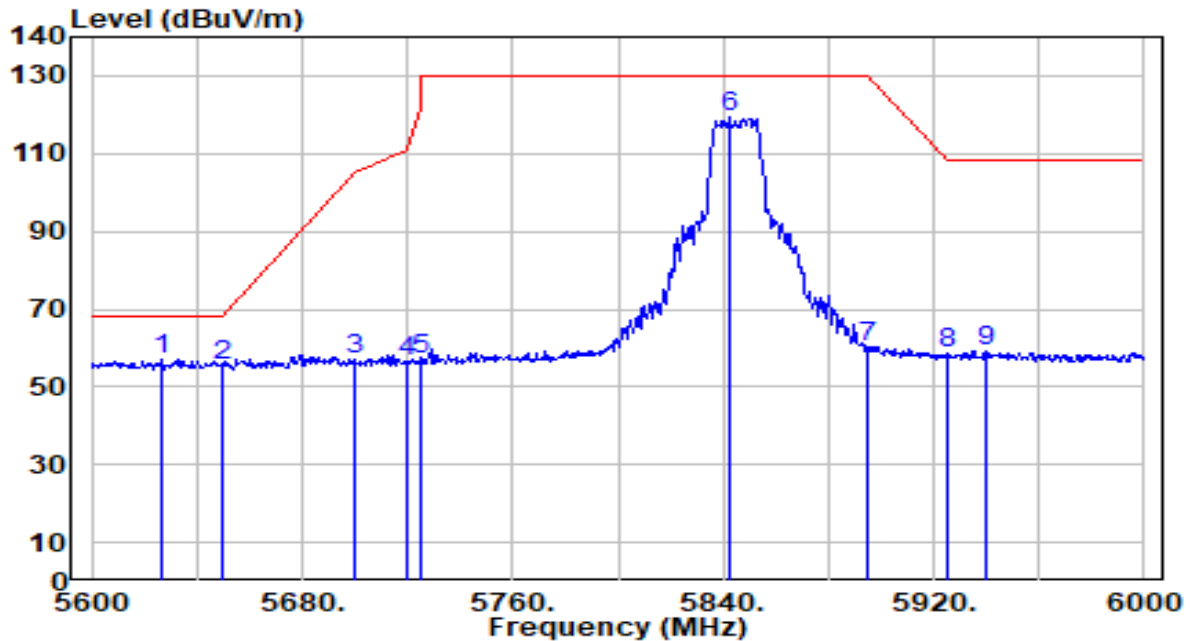


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.400	55.82	1.43	57.25	-10.95	68.20	190	247	Peak
2		5650.000	53.95	1.54	55.49	-12.71	68.20	190	247	Peak
3		5700.000	55.46	1.78	57.24	-47.96	105.20	190	247	Peak
4		5720.000	54.54	1.87	56.41	-54.39	110.80	190	247	Peak
5		5725.000	54.97	1.89	56.87	-65.33	122.20	190	247	Peak
6		5842.400	116.89	2.25	119.14	N/A	N/A	190	247	Peak
7		5895.000	58.19	2.26	60.45	-69.75	130.20	190	247	Peak
8		5925.000	56.17	2.27	58.43	-49.77	108.20	190	247	Peak
9		5939.600	56.83	2.27	59.09	-49.11	108.20	190	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

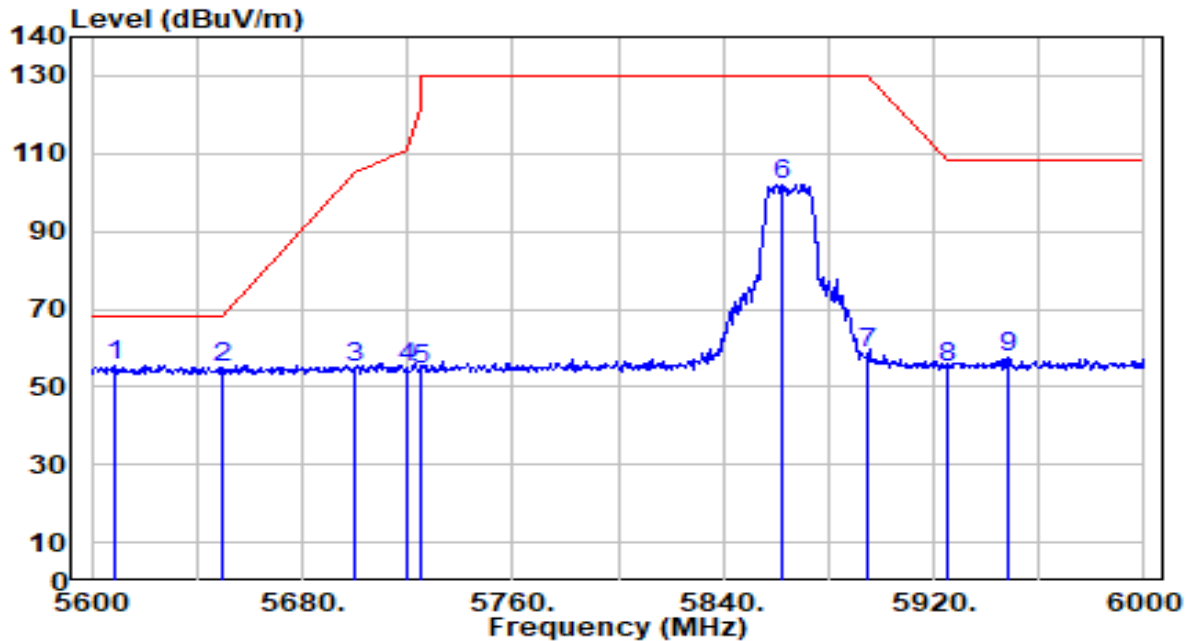


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5608.400	54.36	1.35	55.71	-12.49	68.20	100	19	Peak
2		5650.000	53.31	1.54	54.85	-13.35	68.20	100	19	Peak
3		5700.000	52.99	1.78	54.77	-50.43	105.20	100	19	Peak
4		5720.000	52.89	1.87	54.76	-56.04	110.80	100	19	Peak
5		5725.000	52.71	1.89	54.60	-67.60	122.20	100	19	Peak
6		5862.400	99.89	2.26	102.14	N/A	N/A	100	19	Peak
7		5895.000	56.36	2.26	58.62	-71.58	130.20	100	19	Peak
8		5925.000	52.84	2.27	55.11	-53.09	108.20	100	19	Peak
9		5948.400	55.33	2.27	57.60	-50.60	108.20	100	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

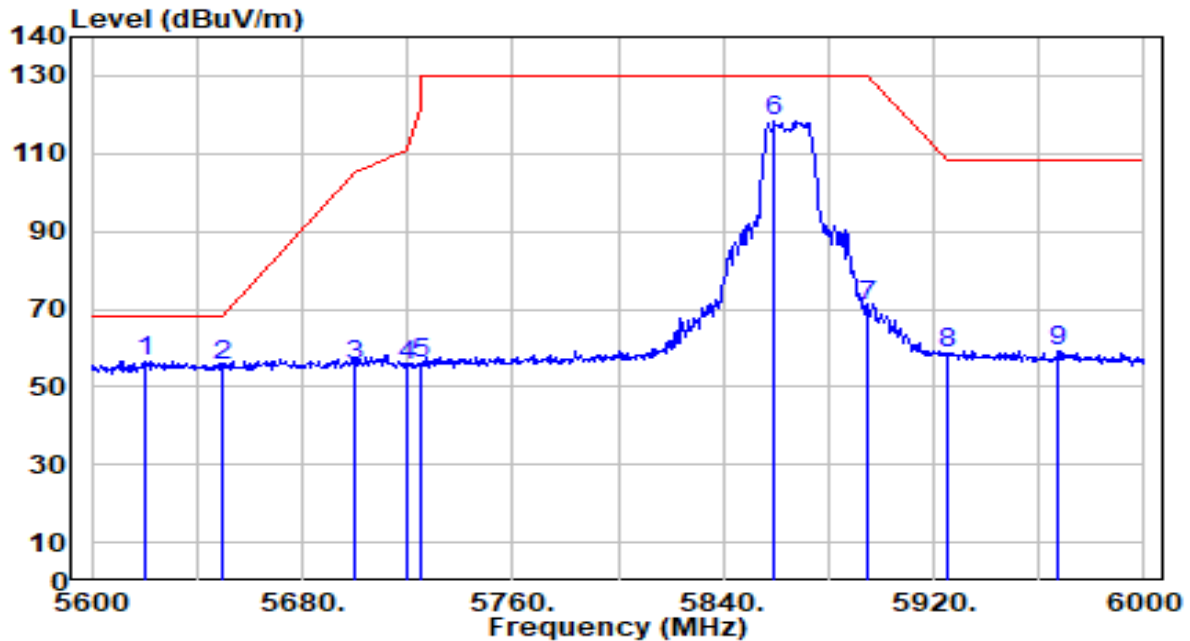


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5620.000	55.37	1.40	56.77	-11.43	68.20	200	244	Peak
2		5650.000	54.18	1.54	55.72	-12.48	68.20	200	244	Peak
3		5700.000	53.87	1.78	55.64	-49.56	105.20	200	244	Peak
4		5720.000	53.77	1.87	55.64	-55.16	110.80	200	244	Peak
5		5725.000	53.96	1.89	55.85	-66.35	122.20	200	244	Peak
6		5859.200	116.25	2.25	118.50	N/A	N/A	200	244	Peak
7		5895.000	68.61	2.26	70.87	-59.33	130.20	200	244	Peak
8		5925.000	56.25	2.27	58.51	-49.69	108.20	200	244	Peak
9		5967.600	56.87	2.27	59.15	-49.05	108.20	200	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

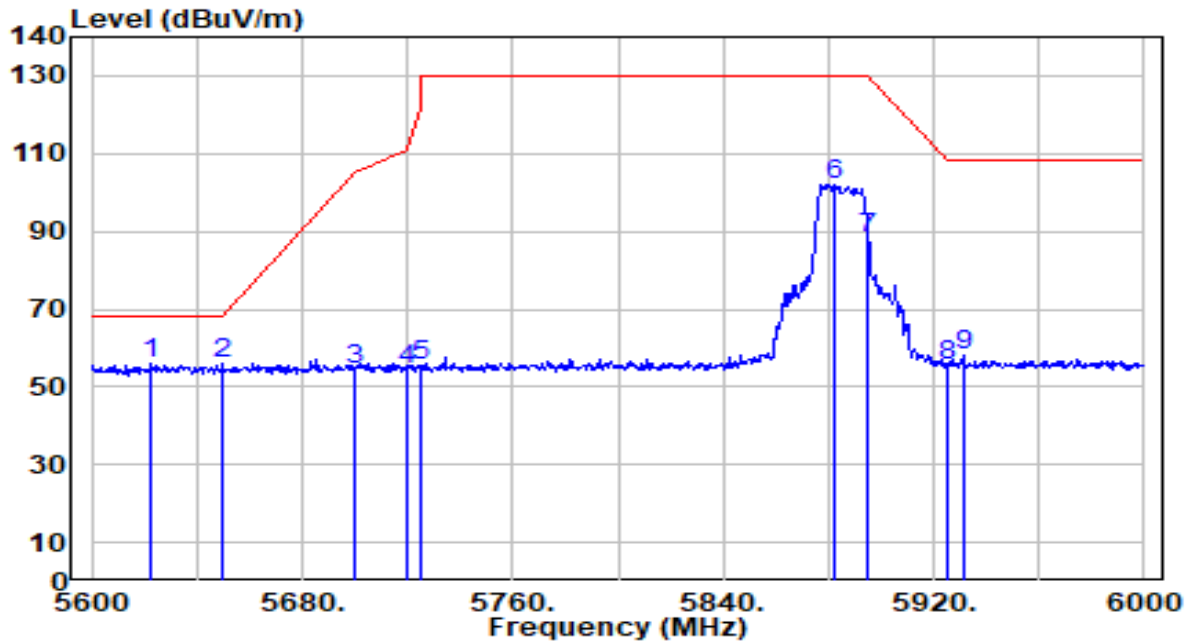


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5622.400	54.46	1.41	55.87	-12.33	68.20	100	20	Peak
2	*	5650.000	54.51	1.54	56.06	-12.14	68.20	100	20	Peak
3		5700.000	52.83	1.78	54.61	-50.59	105.20	100	20	Peak
4		5720.000	52.59	1.87	54.45	-56.35	110.80	100	20	Peak
5		5725.000	53.77	1.89	55.66	-66.54	122.20	100	20	Peak
6		5882.400	99.74	2.26	102.00	N/A	N/A	100	20	Peak
7		5895.000	86.00	2.26	88.26	-41.94	130.20	100	20	Peak
8		5925.000	53.41	2.27	55.68	-52.52	108.20	100	20	Peak
9		5931.200	55.73	2.27	58.00	-50.20	108.20	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

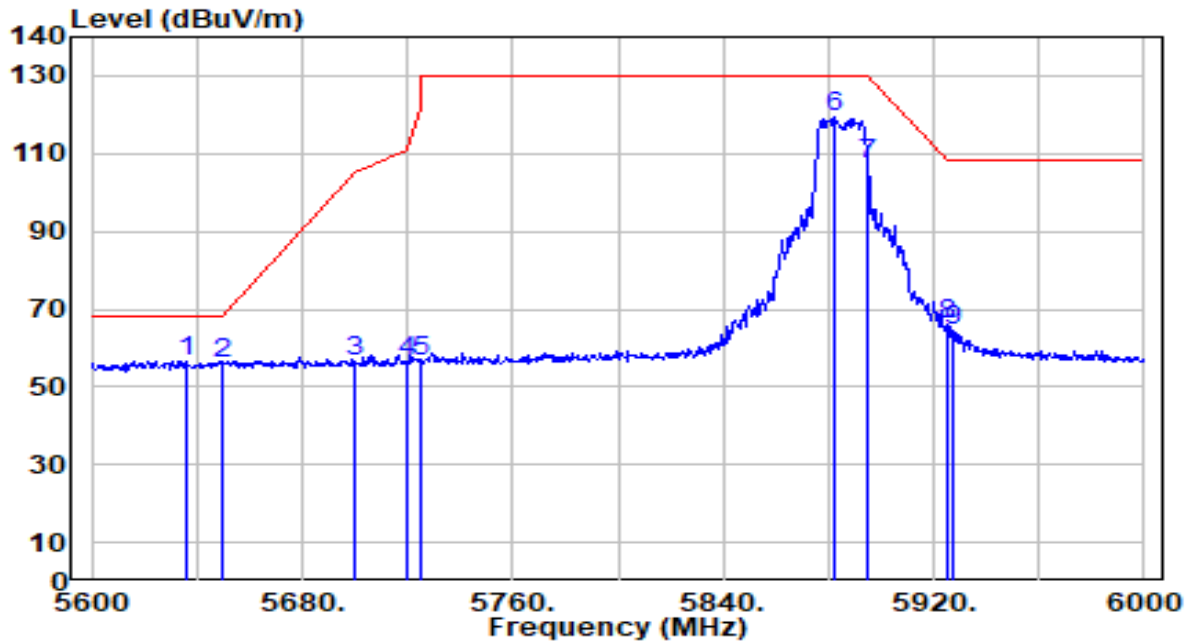


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.000	55.30	1.48	56.78	-11.42	68.20	179	246	Peak
2		5650.000	54.43	1.54	55.98	-12.22	68.20	179	246	Peak
3		5700.000	54.57	1.78	56.34	-48.86	105.20	179	246	Peak
4		5720.000	54.81	1.87	56.68	-54.12	110.80	179	246	Peak
5		5725.000	54.86	1.89	56.76	-65.44	122.20	179	246	Peak
6		5882.400	116.95	2.26	119.21	N/A	N/A	179	246	Peak
7		5895.000	105.07	2.26	107.33	-22.87	130.20	179	246	Peak
8		5925.000	63.61	2.27	65.87	-42.33	108.20	179	246	Peak
9		5927.200	62.24	2.27	64.51	-43.69	108.20	179	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

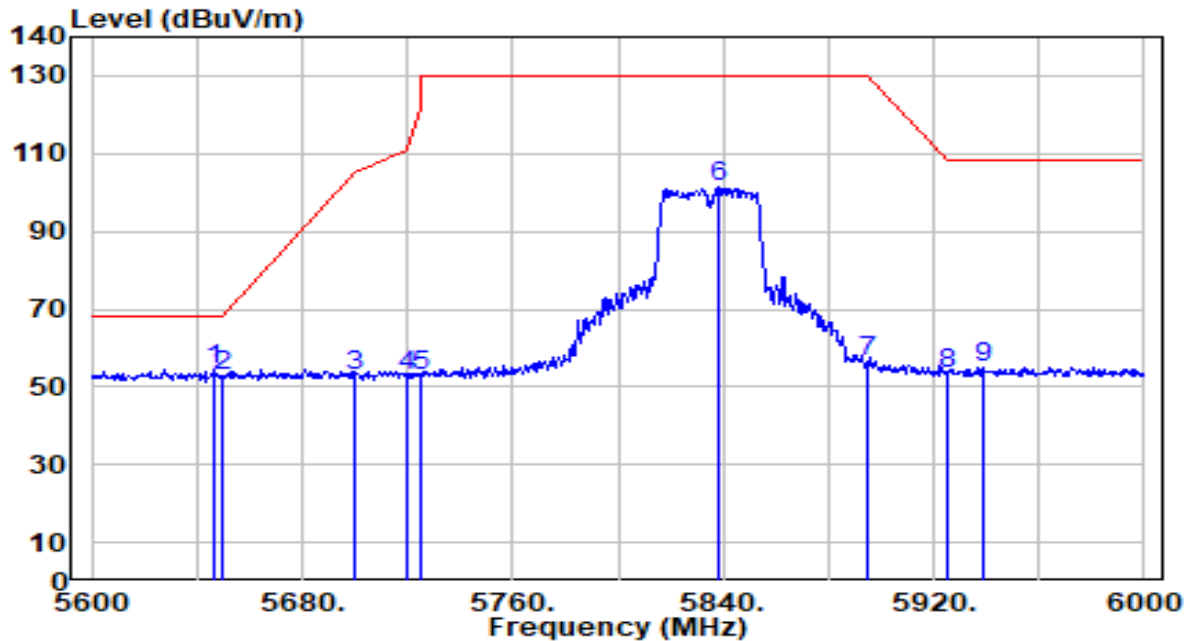


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	53.05	1.53	54.57	-13.63	68.20	100	20	Peak
2		5650.000	51.18	1.54	52.73	-15.47	68.20	100	20	Peak
3		5700.000	51.18	1.78	52.96	-52.24	105.20	100	20	Peak
4		5720.000	50.96	1.87	52.83	-57.97	110.80	100	20	Peak
5		5725.000	50.85	1.89	52.74	-69.46	122.20	100	20	Peak
6		5838.000	99.19	2.25	101.44	N/A	N/A	100	20	Peak
7		5895.000	54.27	2.26	56.53	-73.67	130.20	100	20	Peak
8		5925.000	50.86	2.27	53.12	-55.08	108.20	100	20	Peak
9		5938.800	52.80	2.27	55.07	-53.13	108.20	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

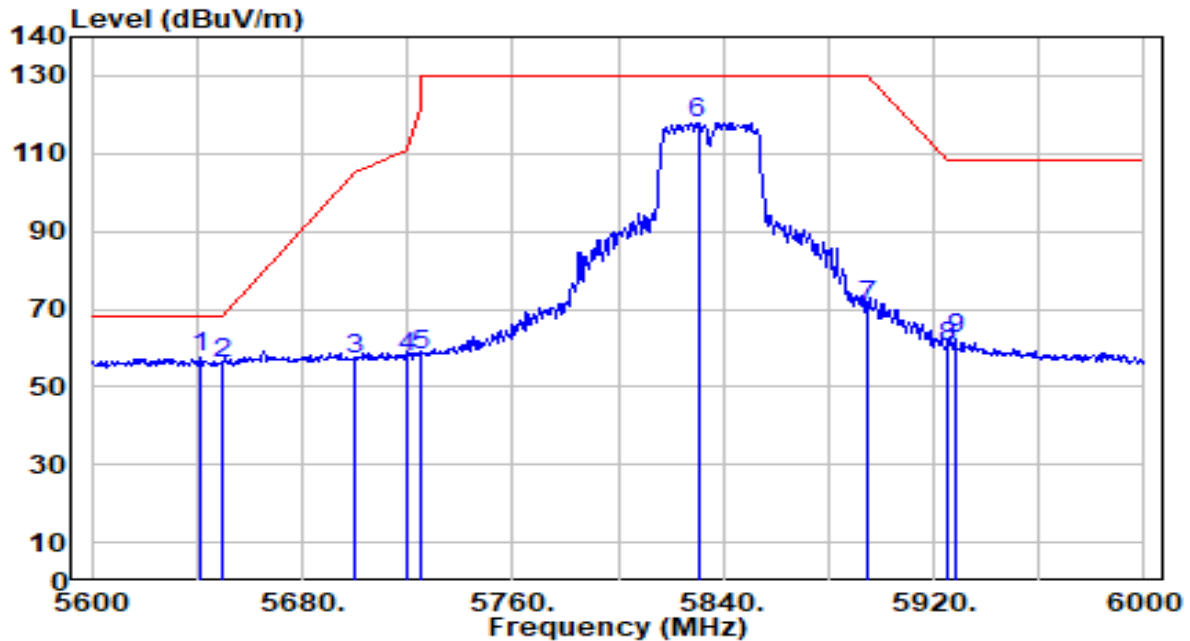


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.200	56.12	1.50	57.62	-10.58	68.20	200	6	Peak
2		5650.000	54.72	1.54	56.26	-11.94	68.20	200	6	Peak
3		5700.000	55.26	1.78	57.04	-48.16	105.20	200	6	Peak
4		5720.000	55.93	1.87	57.80	-53.00	110.80	200	6	Peak
5		5725.000	56.28	1.89	58.17	-64.03	122.20	200	6	Peak
6		5830.400	115.61	2.25	117.86	N/A	N/A	200	6	Peak
7		5895.000	68.79	2.26	71.06	-59.14	130.20	200	6	Peak
8		5925.000	57.98	2.27	60.25	-47.95	108.20	200	6	Peak
9		5928.400	59.92	2.27	62.19	-46.01	108.20	200	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

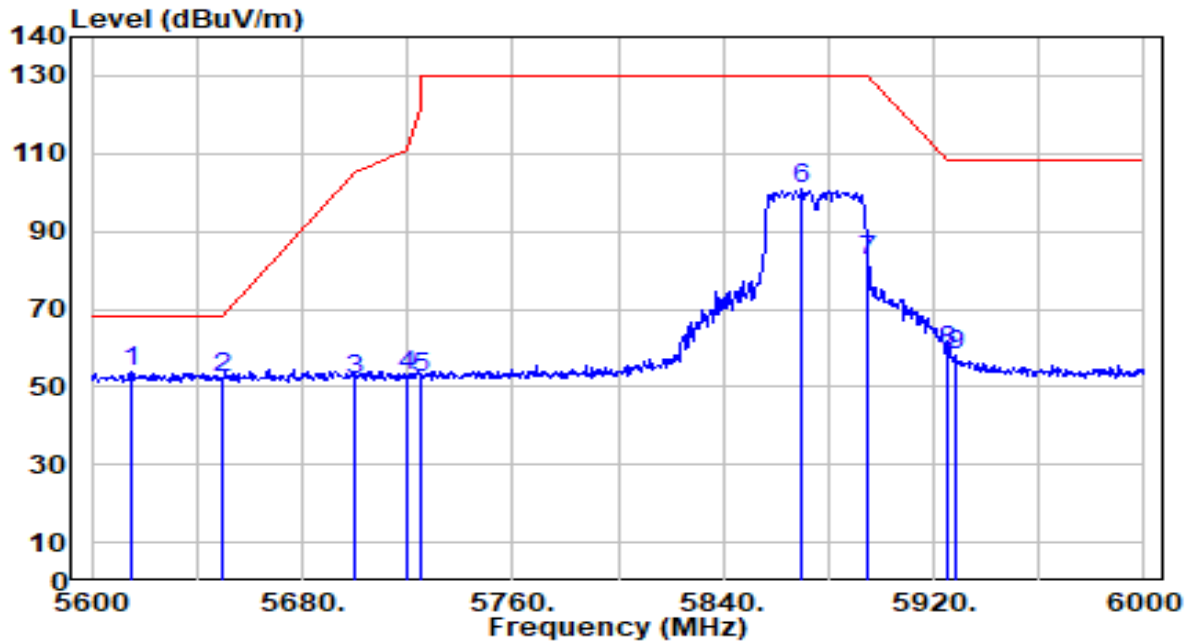


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5614.800	52.40	1.38	53.78	-14.42	68.20	100	20	Peak
2		5650.000	51.01	1.54	52.55	-15.65	68.20	100	20	Peak
3		5700.000	50.00	1.78	51.78	-53.42	105.20	100	20	Peak
4		5720.000	50.88	1.87	52.75	-58.05	110.80	100	20	Peak
5		5725.000	50.51	1.89	52.40	-69.80	122.20	100	20	Peak
6		5870.000	98.67	2.26	100.93	N/A	N/A	100	20	Peak
7		5895.000	80.18	2.26	82.44	-47.76	130.20	100	20	Peak
8		5925.000	56.78	2.27	59.05	-49.15	108.20	100	20	Peak
9		5928.400	56.01	2.27	58.28	-49.92	108.20	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

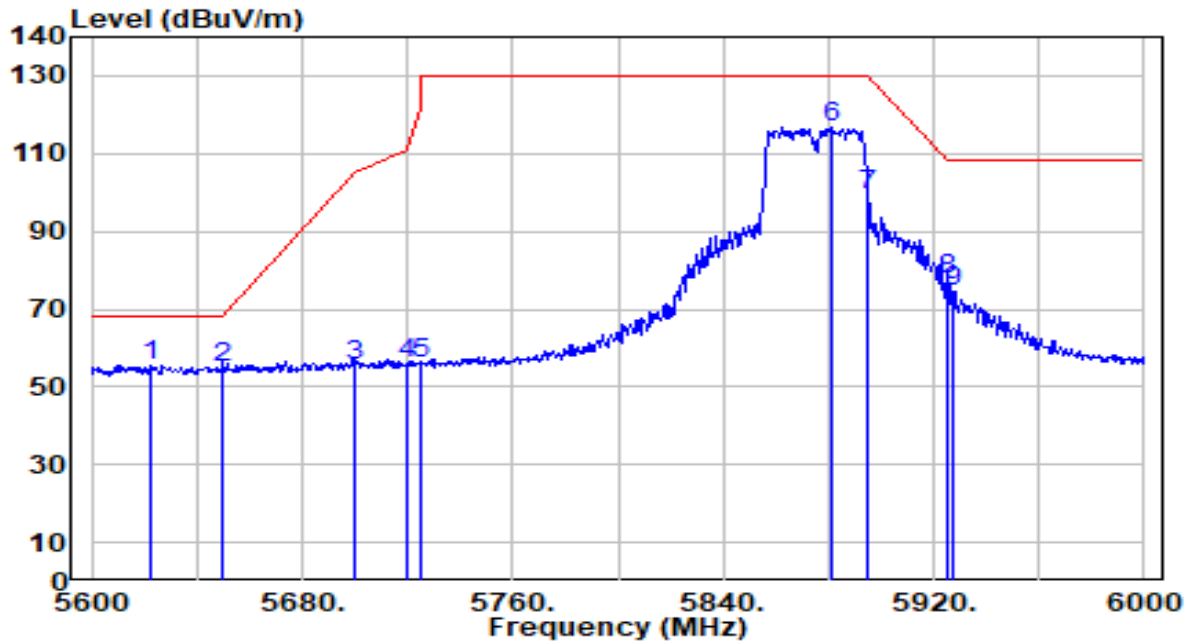


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5622.800	54.31	1.41	55.72	-12.48	68.20	184	246	Peak
2		5650.000	53.62	1.54	55.16	-13.04	68.20	184	246	Peak
3		5700.000	53.57	1.78	55.35	-49.85	105.20	184	246	Peak
4		5720.000	54.35	1.87	56.22	-54.58	110.80	184	246	Peak
5		5725.000	54.08	1.89	55.98	-66.22	122.20	184	246	Peak
6		5880.800	114.27	2.26	116.53	N/A	N/A	184	246	Peak
7		5895.000	97.07	2.26	99.33	-30.87	130.20	184	246	Peak
8		5925.000	75.14	2.27	77.41	-30.79	108.20	184	246	Peak
9		5927.600	72.45	2.27	74.71	-33.49	108.20	184	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

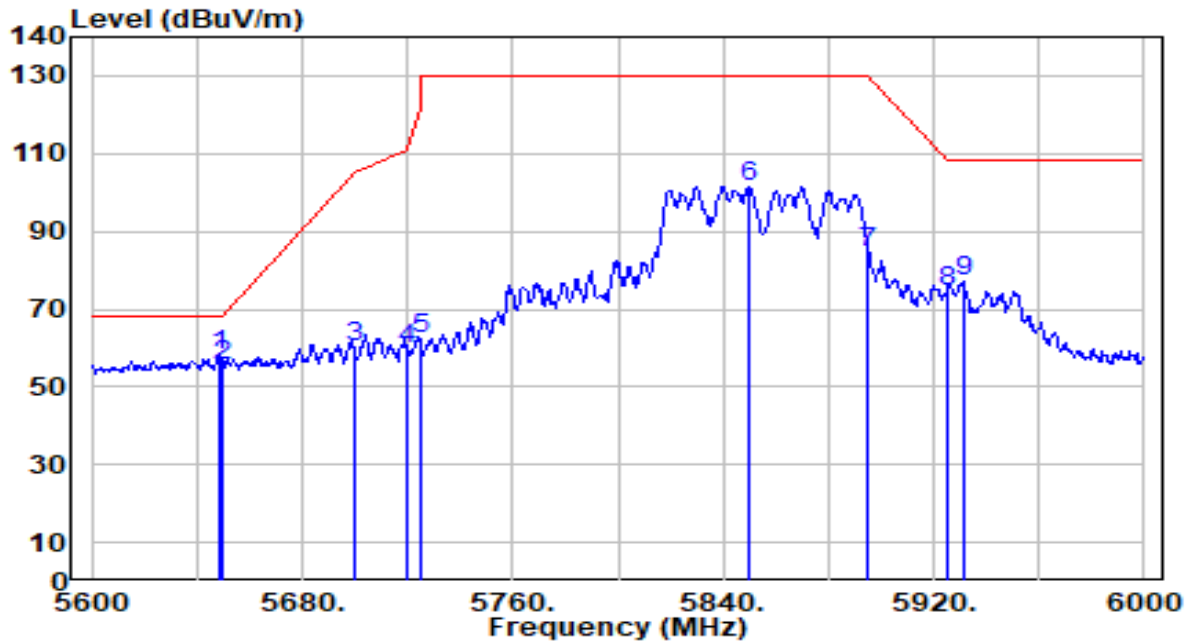


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	56.40	1.53	57.93	-10.27	68.20	100	20	Peak
2		5650.000	54.11	1.54	55.65	-12.55	68.20	100	20	Peak
3		5700.000	58.57	1.78	60.35	-44.85	105.20	100	20	Peak
4		5720.000	57.87	1.87	59.74	-51.06	110.80	100	20	Peak
5		5725.000	60.70	1.89	62.59	-59.61	122.20	100	20	Peak
6		5849.600	99.22	2.25	101.48	N/A	N/A	100	20	Peak
7		5895.000	82.24	2.26	84.50	-45.70	130.20	100	20	Peak
8		5925.000	72.42	2.27	74.69	-33.51	108.20	100	20	Peak
9		5931.600	74.72	2.27	76.99	-31.21	108.20	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

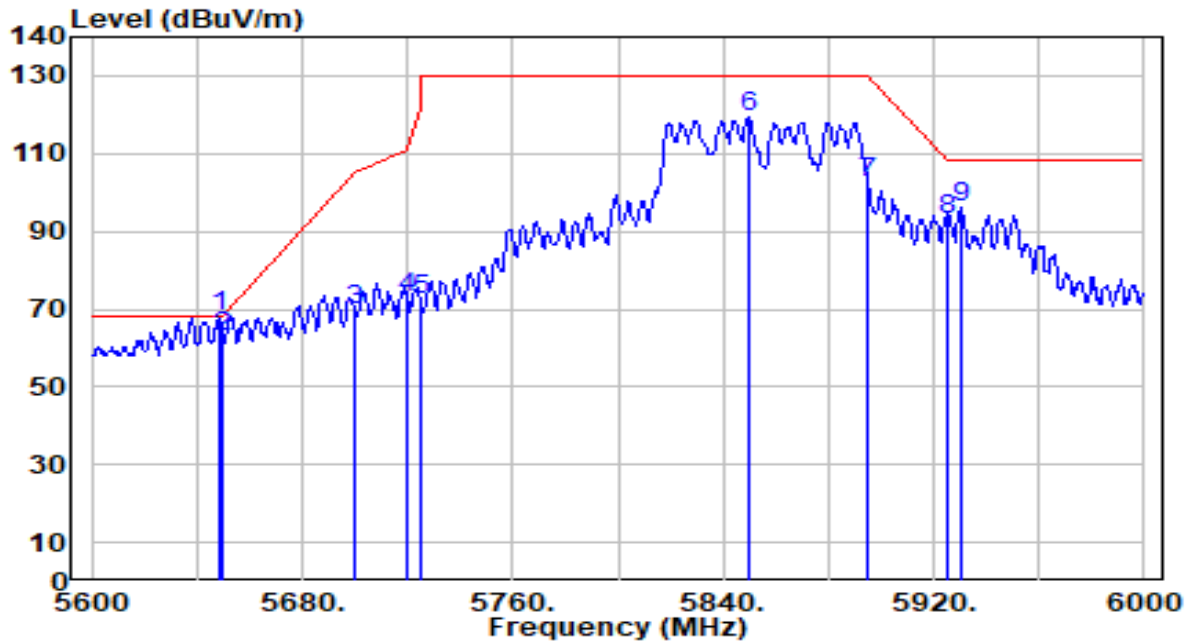


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.400	66.48	1.53	68.01	-0.19	68.20	177	244	Peak
2		5650.000	61.46	1.54	63.00	-5.20	68.20	177	244	Peak
3		5700.000	68.09	1.78	69.87	-35.33	105.20	177	244	Peak
4		5720.000	71.15	1.87	73.02	-37.78	110.80	177	244	Peak
5		5725.000	70.74	1.89	72.64	-49.56	122.20	177	244	Peak
6		5849.600	117.04	2.25	119.29	N/A	N/A	177	244	Peak
7		5895.000	100.29	2.26	102.55	-27.65	130.20	177	244	Peak
8		5925.000	90.97	2.27	93.24	-14.96	108.20	177	244	Peak
9		5930.400	93.77	2.27	96.03	-12.17	108.20	177	244	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band4_CH 163_ANT 0+1	Test Voltage	AC 120V/60Hz

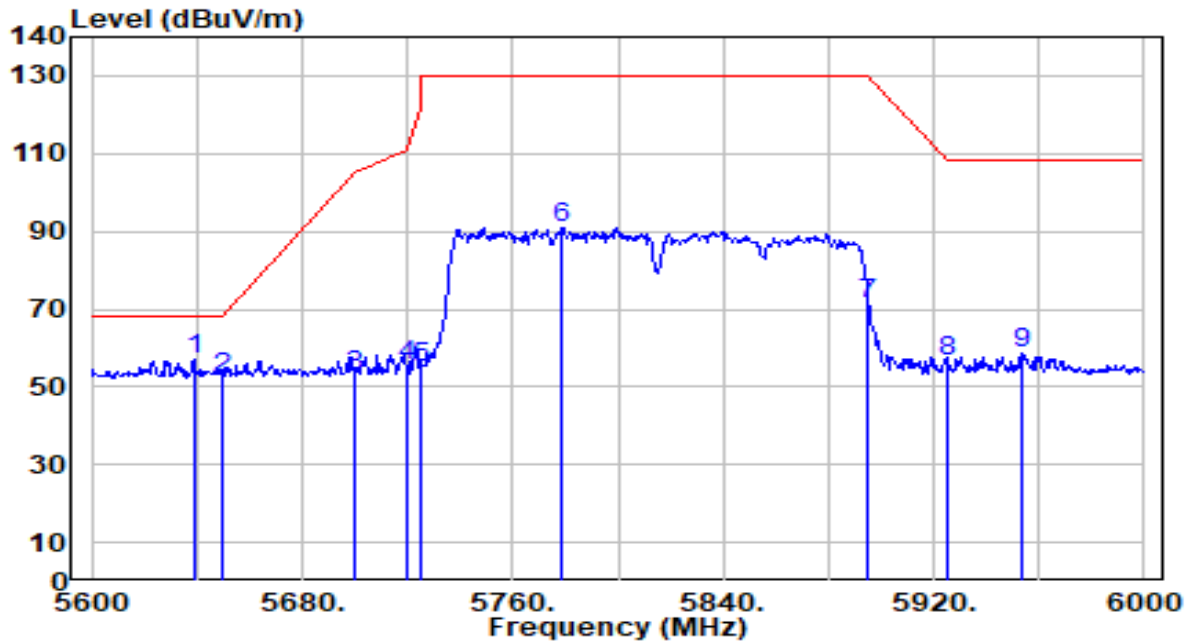


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5638.800	55.75	1.49	57.24	-10.96	68.20	100	21	Peak
2		5650.000	50.92	1.54	52.46	-15.74	68.20	100	21	Peak
3		5700.000	51.28	1.78	53.06	-52.14	105.20	100	21	Peak
4		5720.000	53.56	1.87	55.43	-55.37	110.80	100	21	Peak
5		5725.000	52.86	1.89	54.75	-67.45	122.20	100	21	Peak
6		5778.800	88.72	2.14	90.86	N/A	N/A	100	21	Peak
7		5895.000	69.12	2.26	71.39	-58.81	130.20	100	21	Peak
8		5925.000	54.47	2.27	56.73	-51.47	108.20	100	21	Peak
9		5954.000	56.29	2.27	58.56	-49.64	108.20	100	21	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band4_CH 163_ANT 0+1	Test Voltage	AC 120V/60Hz

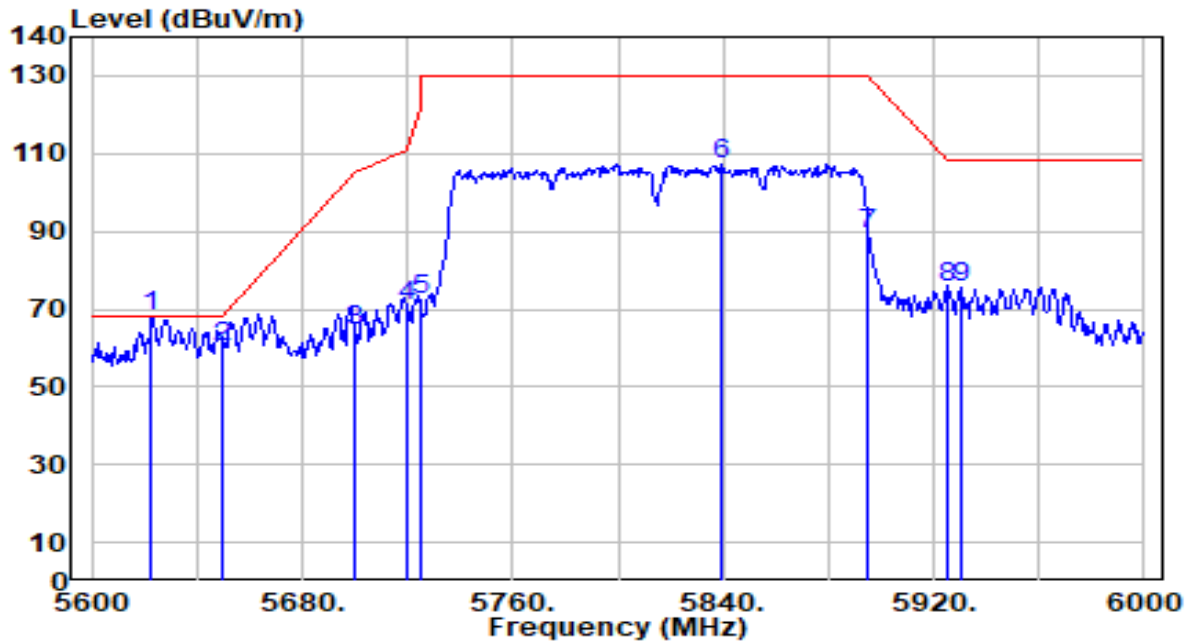


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5622.800	66.59	1.41	68.00	-0.20	68.20	180	247	Peak
2		5650.000	58.72	1.54	60.27	-7.93	68.20	180	247	Peak
3		5700.000	62.43	1.78	64.21	-40.99	105.20	180	247	Peak
4		5720.000	68.91	1.87	70.78	-40.02	110.80	180	247	Peak
5		5725.000	70.24	1.89	72.13	-50.07	122.20	180	247	Peak
6		5839.600	104.99	2.25	107.24	N/A	N/A	180	247	Peak
7		5895.000	87.16	2.26	89.42	-40.78	130.20	180	247	Peak
8		5925.000	73.05	2.27	75.31	-32.89	108.20	180	247	Peak
9		5930.000	73.21	2.27	75.48	-32.72	108.20	180	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

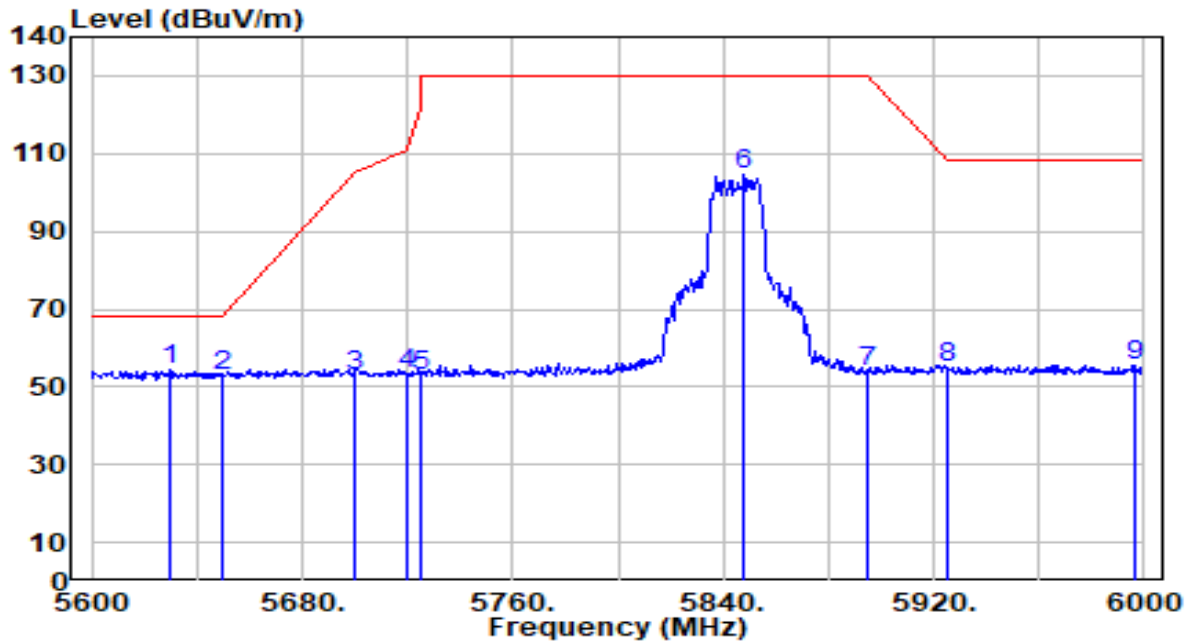


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.600	53.04	1.45	54.49	-13.71	68.20	100	126	Peak
2		5650.000	51.24	1.54	52.79	-15.41	68.20	100	126	Peak
3		5700.000	51.23	1.78	53.01	-52.19	105.20	100	126	Peak
4		5720.000	51.24	1.87	53.11	-57.69	110.80	100	126	Peak
5		5725.000	51.15	1.89	53.05	-69.15	122.20	100	126	Peak
6		5848.000	102.44	2.25	104.70	N/A	N/A	100	126	Peak
7		5895.000	51.62	2.26	53.89	-76.31	130.20	100	126	Peak
8		5925.000	52.51	2.27	54.78	-53.42	108.20	100	126	Peak
9		5996.000	53.30	2.28	55.58	-52.62	108.20	100	126	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 169_ANT 0+1	Test Voltage	AC 120V/60Hz

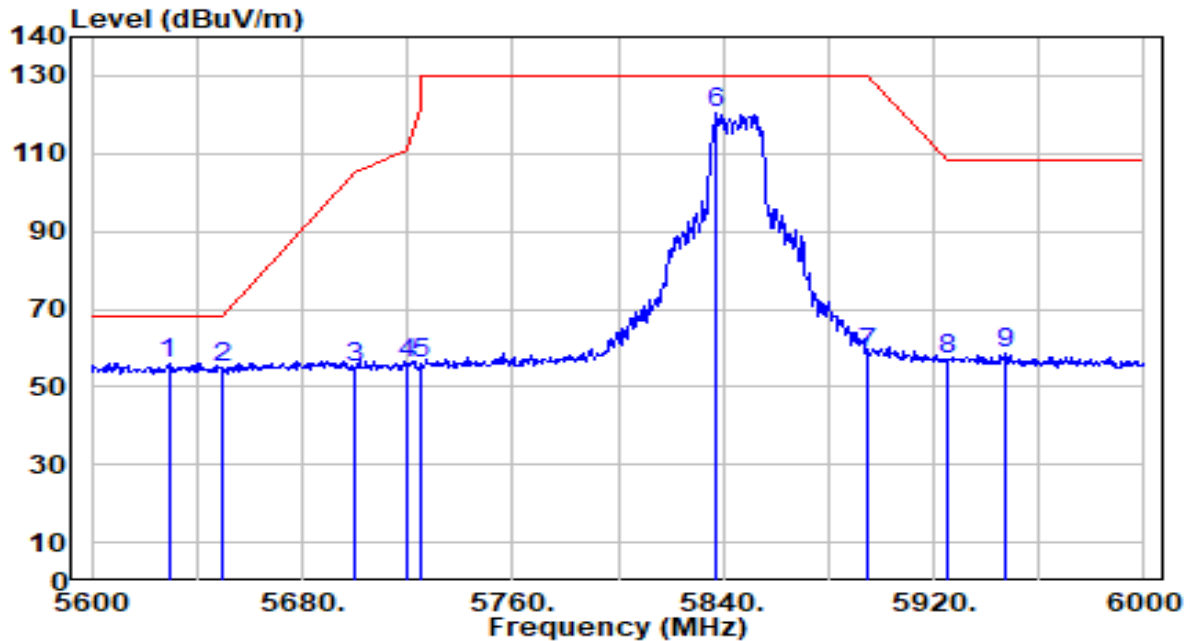


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.200	54.79	1.44	56.24	-11.96	68.20	176	247	Peak
2		5650.000	53.44	1.54	54.98	-13.22	68.20	176	247	Peak
3		5700.000	53.26	1.78	55.04	-50.16	105.20	176	247	Peak
4		5720.000	53.97	1.87	55.84	-54.96	110.80	176	247	Peak
5		5725.000	54.02	1.89	55.91	-66.29	122.20	176	247	Peak
6		5837.600	117.97	2.25	120.22	N/A	N/A	176	247	Peak
7		5895.000	56.39	2.26	58.65	-71.55	130.20	176	247	Peak
8		5925.000	54.78	2.27	57.04	-51.16	108.20	176	247	Peak
9		5946.800	56.38	2.27	58.65	-49.55	108.20	176	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

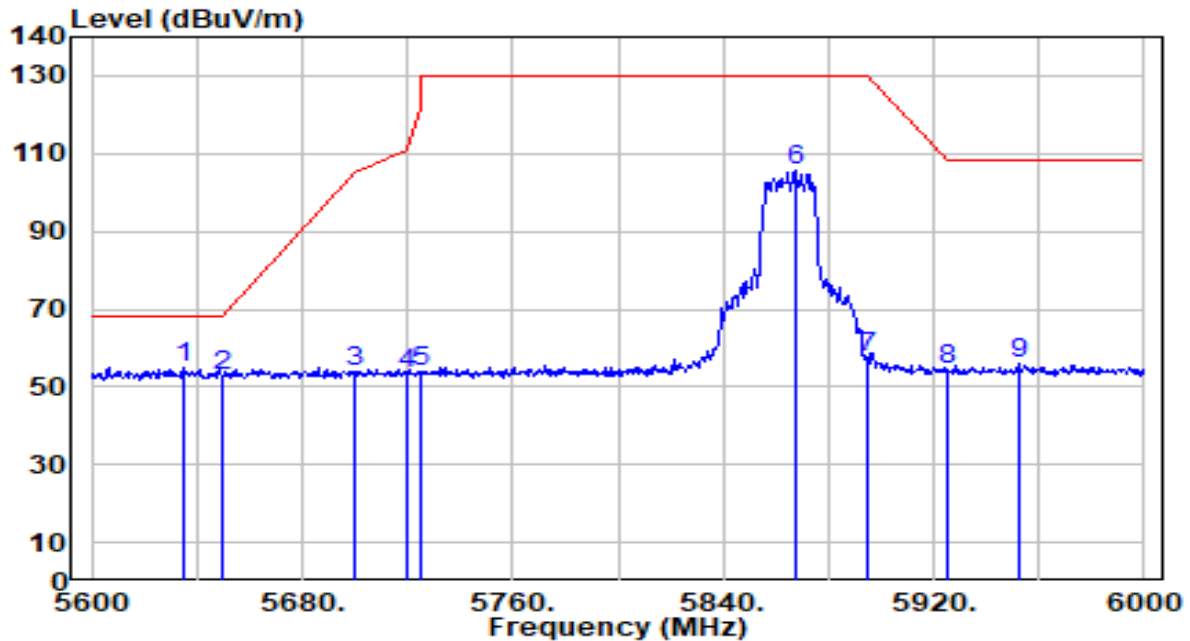


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.200	53.25	1.47	54.73	-13.47	68.20	100	179	Peak
2		5650.000	51.23	1.54	52.77	-15.43	68.20	100	179	Peak
3		5700.000	52.26	1.78	54.03	-51.17	105.20	100	179	Peak
4		5720.000	51.30	1.87	53.17	-57.63	110.80	100	179	Peak
5		5725.000	51.87	1.89	53.76	-68.44	122.20	100	179	Peak
6		5867.200	103.58	2.26	105.84	N/A	N/A	100	179	Peak
7		5895.000	55.17	2.26	57.43	-72.77	130.20	100	179	Peak
8		5925.000	52.07	2.27	54.34	-53.86	108.20	100	179	Peak
9		5952.000	53.71	2.27	55.98	-52.22	108.20	100	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 173_ANT 0+1	Test Voltage	AC 120V/60Hz

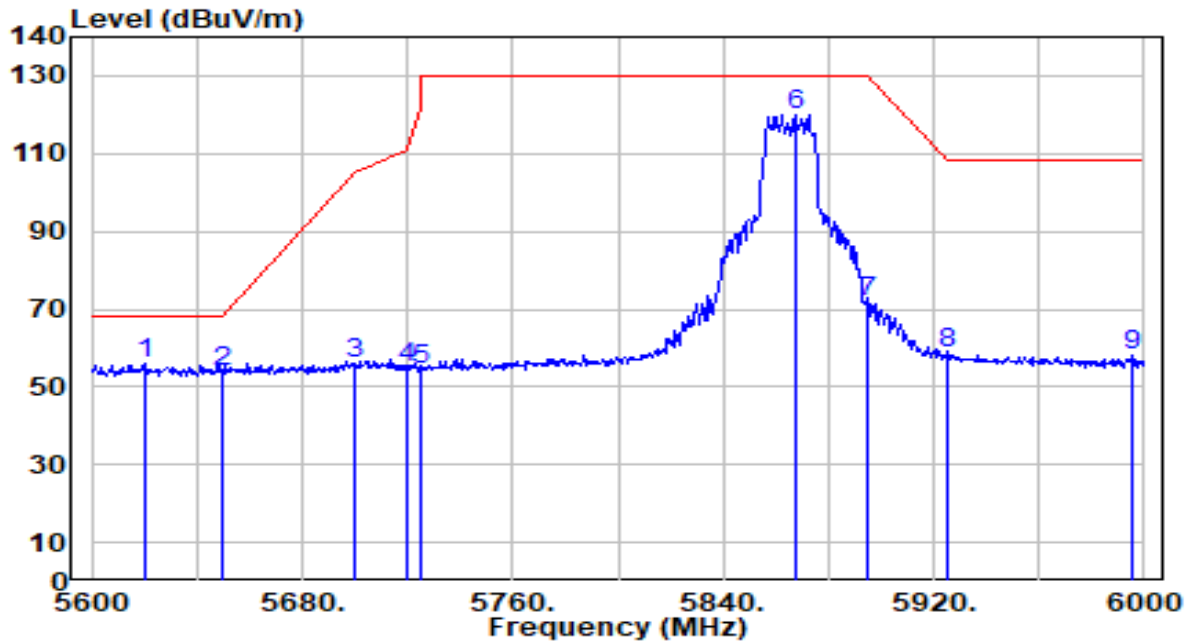


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5620.000	54.39	1.40	55.79	-12.41	68.20	200	246	Peak
2		5650.000	52.45	1.54	54.00	-14.20	68.20	200	246	Peak
3		5700.000	53.99	1.78	55.76	-49.44	105.20	200	246	Peak
4		5720.000	53.27	1.87	55.14	-55.66	110.80	200	246	Peak
5		5725.000	52.42	1.89	54.31	-67.89	122.20	200	246	Peak
6		5867.200	117.73	2.26	119.99	N/A	N/A	200	246	Peak
7		5895.000	69.60	2.26	71.86	-58.34	130.20	200	246	Peak
8		5925.000	56.39	2.27	58.65	-49.55	108.20	200	246	Peak
9		5995.600	55.86	2.28	58.14	-50.06	108.20	200	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

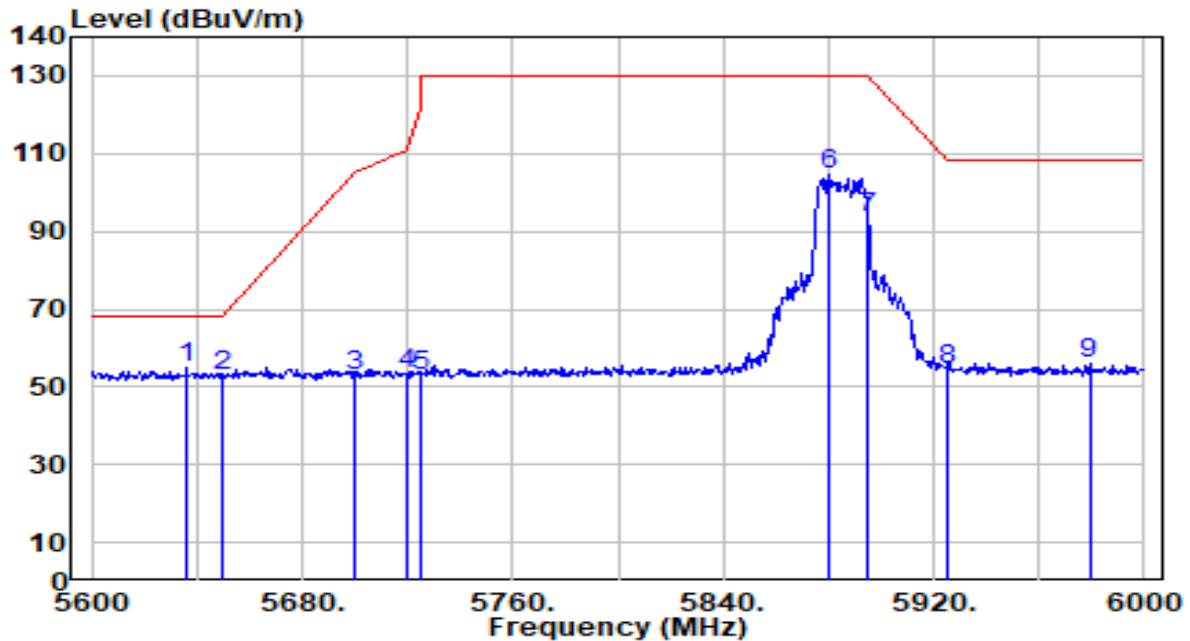


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.000	53.33	1.48	54.81	-13.39	68.20	100	20	Peak
2		5650.000	51.17	1.54	52.72	-15.48	68.20	100	20	Peak
3		5700.000	51.25	1.78	53.03	-52.17	105.20	100	20	Peak
4		5720.000	51.55	1.87	53.42	-57.38	110.80	100	20	Peak
5		5725.000	51.07	1.89	52.96	-69.24	122.20	100	20	Peak
6		5880.400	102.30	2.26	104.55	N/A	N/A	100	20	Peak
7		5895.000	91.07	2.26	93.33	-36.87	130.20	100	20	Peak
8		5925.000	52.28	2.27	54.55	-53.65	108.20	100	20	Peak
9		5979.200	53.88	2.28	56.15	-52.05	108.20	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-21
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 177_ANT 0+1	Test Voltage	AC 120V/60Hz

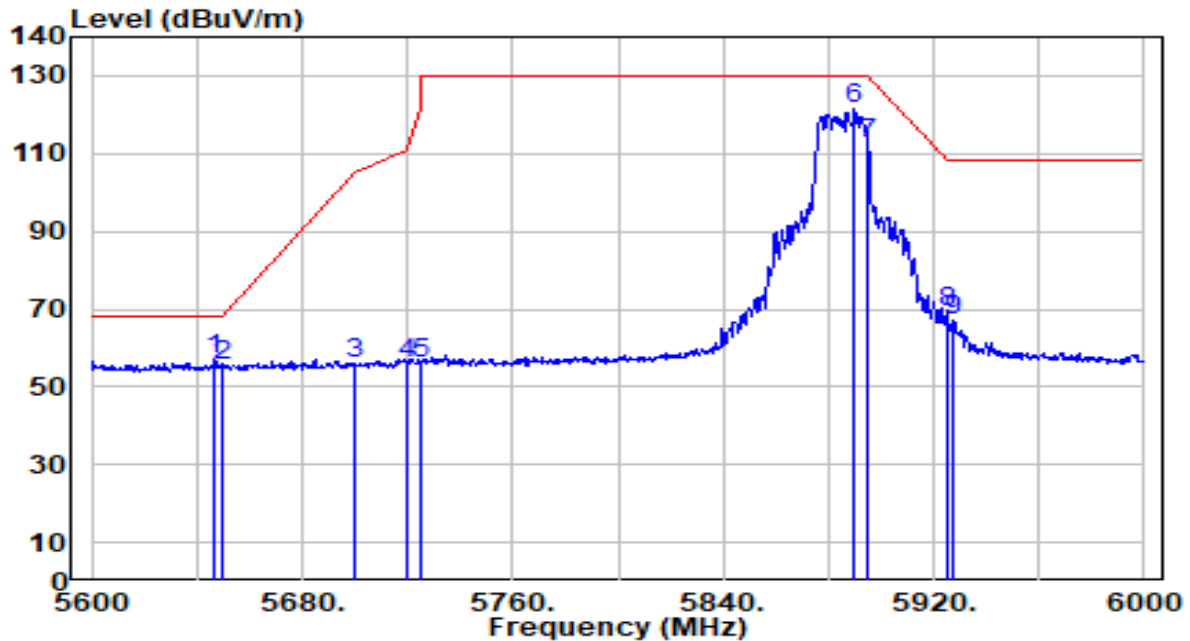


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	55.62	1.53	57.15	-11.05	68.20	200	246	Peak
2		5650.000	53.92	1.54	55.47	-12.73	68.20	200	246	Peak
3		5700.000	54.15	1.78	55.92	-49.28	105.20	200	246	Peak
4		5720.000	54.14	1.87	56.01	-54.79	110.80	200	246	Peak
5		5725.000	54.08	1.89	55.97	-66.23	122.20	200	246	Peak
6		5890.000	119.18	2.26	121.44	N/A	N/A	200	246	Peak
7		5895.000	110.06	2.26	112.32	-17.88	130.20	200	246	Peak
8		5925.000	66.90	2.27	69.17	-39.03	108.20	200	246	Peak
9		5927.600	64.71	2.27	66.98	-41.22	108.20	200	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

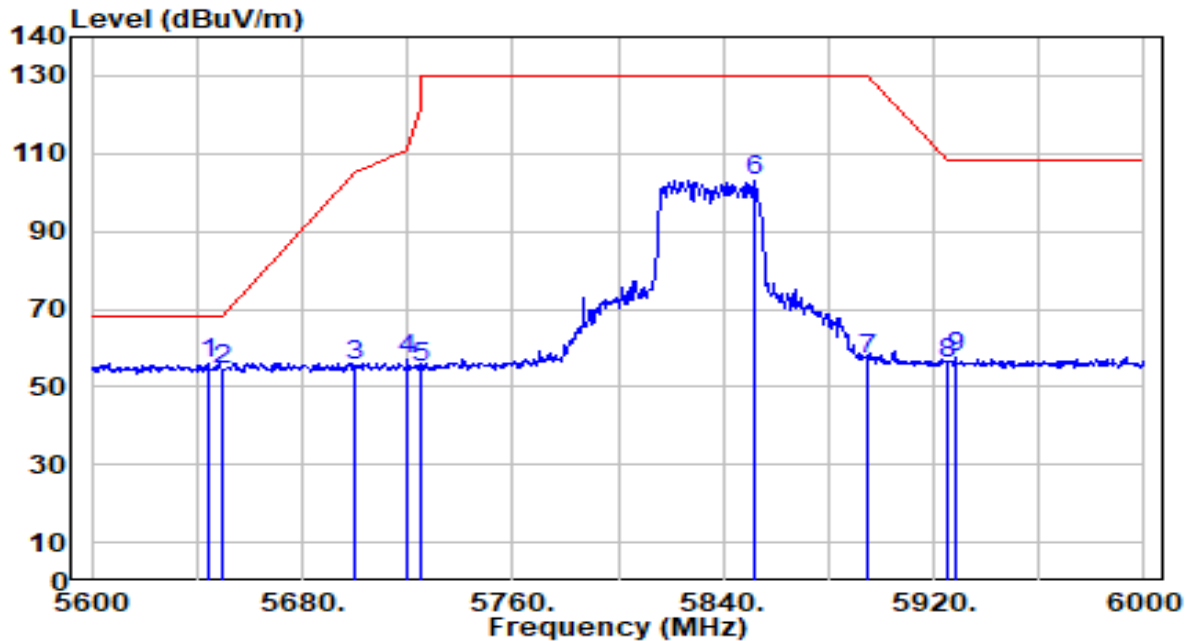


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.000	54.56	1.51	56.07	-12.13	68.20	100	179	Peak
2		5650.000	52.68	1.54	54.22	-13.98	68.20	100	179	Peak
3		5700.000	53.53	1.78	55.31	-49.89	105.20	100	179	Peak
4		5720.000	54.94	1.87	56.81	-53.99	110.80	100	179	Peak
5		5725.000	53.15	1.89	55.04	-67.16	122.20	100	179	Peak
6		5851.600	101.02	2.25	103.28	N/A	N/A	100	179	Peak
7		5895.000	54.78	2.26	57.04	-73.16	130.20	100	179	Peak
8		5925.000	53.88	2.27	56.15	-52.05	108.20	100	179	Peak
9		5928.400	55.10	2.27	57.37	-50.83	108.20	100	179	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 167_ANT 0+1	Test Voltage	AC 120V/60Hz

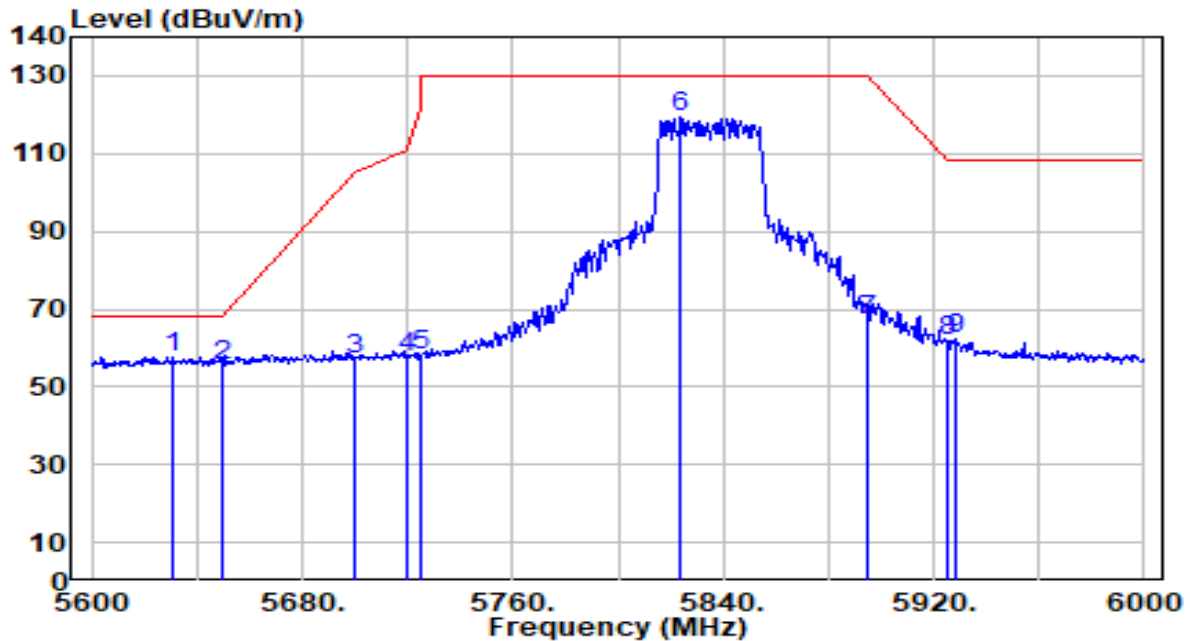


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5631.200	56.39	1.45	57.85	-10.35	68.20	200	347	Peak
2		5650.000	54.17	1.54	55.71	-12.49	68.20	200	347	Peak
3		5700.000	55.04	1.78	56.82	-48.38	105.20	200	347	Peak
4		5720.000	55.76	1.87	57.63	-53.17	110.80	200	347	Peak
5		5725.000	56.25	1.89	58.14	-64.06	122.20	200	347	Peak
6		5824.000	117.27	2.25	119.52	N/A	N/A	200	347	Peak
7		5895.000	64.99	2.26	67.25	-62.95	130.20	200	347	Peak
8		5925.000	59.44	2.27	61.71	-46.49	108.20	200	347	Peak
9		5928.800	59.82	2.27	62.09	-46.11	108.20	200	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

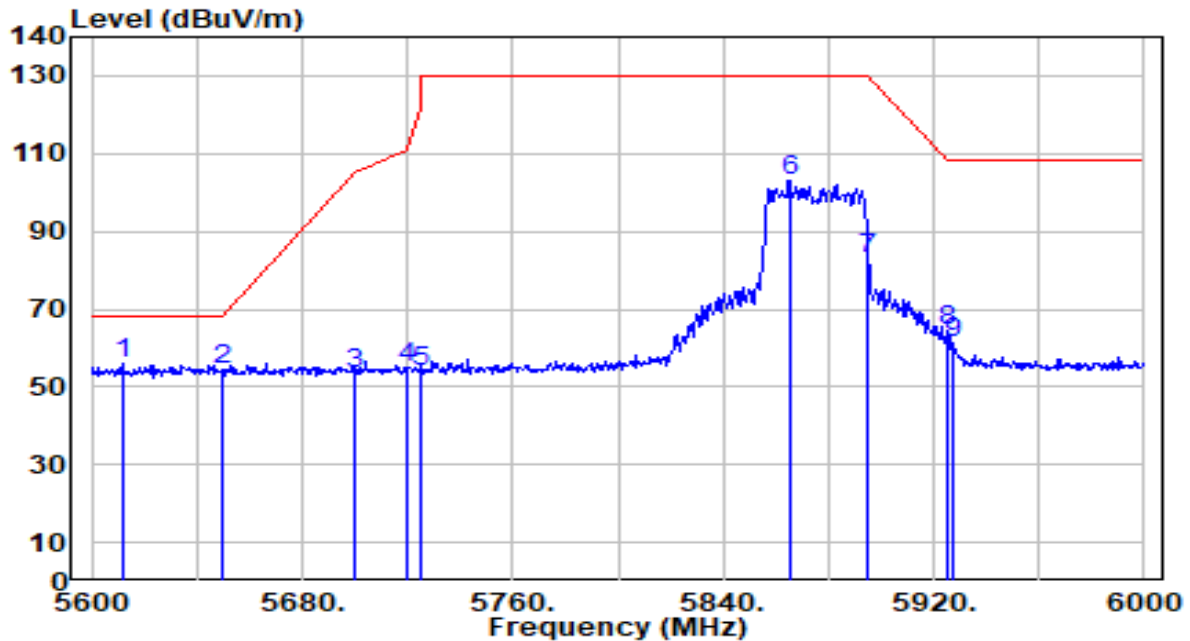


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5611.600	54.51	1.36	55.88	-12.32	68.20	100	19	Peak
2		5650.000	52.82	1.54	54.36	-13.84	68.20	100	19	Peak
3		5700.000	51.84	1.78	53.61	-51.59	105.20	100	19	Peak
4		5720.000	53.01	1.87	54.88	-55.92	110.80	100	19	Peak
5		5725.000	51.99	1.89	53.88	-68.32	122.20	100	19	Peak
6		5865.200	100.84	2.26	103.09	N/A	N/A	100	19	Peak
7		5895.000	80.91	2.26	83.17	-47.03	130.20	100	19	Peak
8		5925.000	62.13	2.27	64.39	-43.81	108.20	100	19	Peak
9		5927.200	59.22	2.27	61.49	-46.71	108.20	100	19	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 175_ANT 0+1	Test Voltage	AC 120V/60Hz

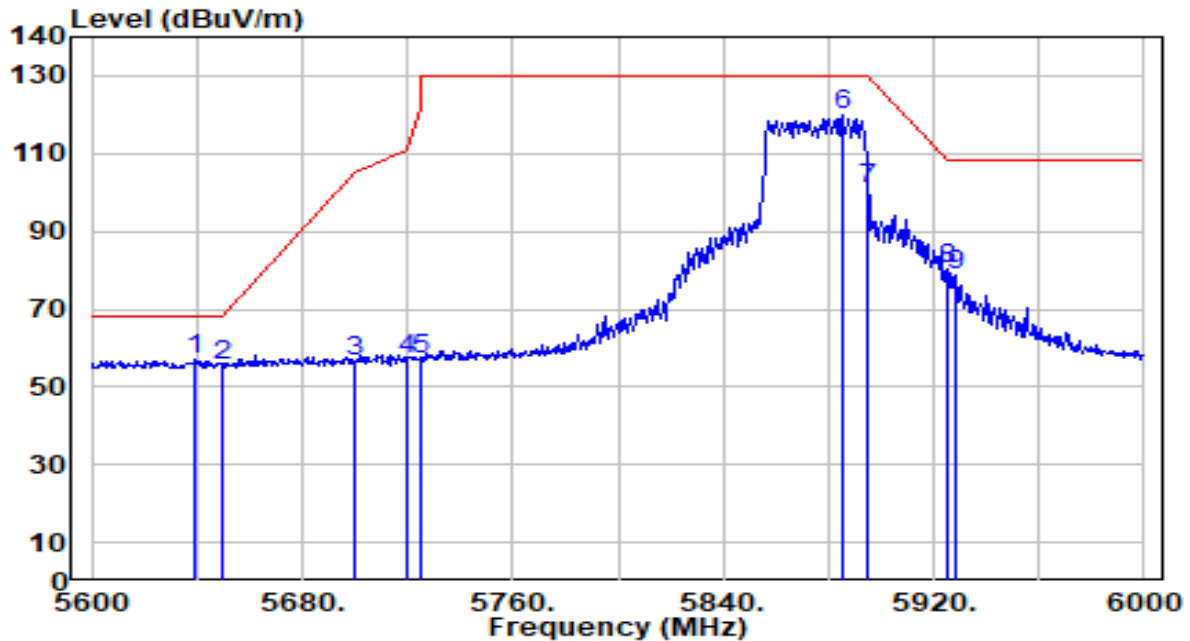


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5639.600	55.52	1.49	57.01	-11.19	68.20	200	246	Peak
2		5650.000	53.83	1.54	55.37	-12.83	68.20	200	246	Peak
3		5700.000	54.50	1.78	56.27	-48.93	105.20	200	246	Peak
4		5720.000	55.04	1.87	56.91	-53.89	110.80	200	246	Peak
5		5725.000	55.14	1.89	57.03	-65.17	122.20	200	246	Peak
6		5885.200	117.49	2.26	119.75	N/A	N/A	200	246	Peak
7		5895.000	98.87	2.26	101.13	-29.07	130.20	200	246	Peak
8		5925.000	78.26	2.27	80.53	-27.67	108.20	200	246	Peak
9		5928.000	76.55	2.27	78.82	-29.38	108.20	200	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Dual-Band WiFi 7 Router	Date of Test	2025-01-23
Factor	DRH18-E	Temp. / Humidity	23°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 171_ANT 0+1	Test Voltage	AC 120V/60Hz

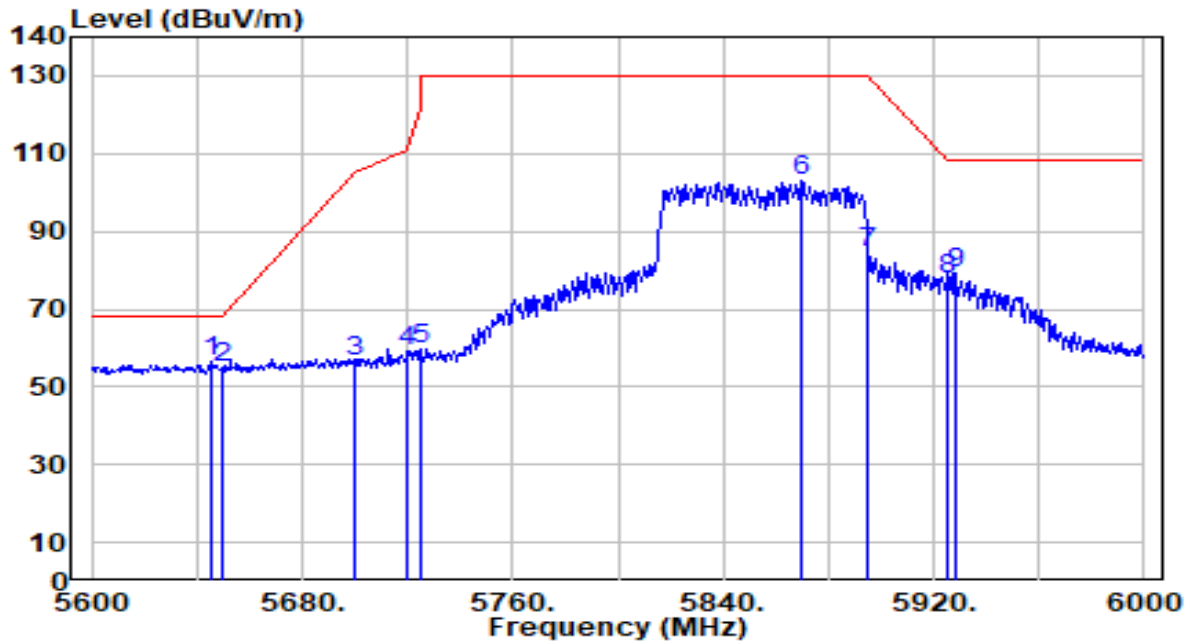

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.600	55.09	1.52	56.61	-11.59	68.20	100	127	Peak
2		5650.000	53.64	1.54	55.18	-13.02	68.20	100	127	Peak
3		5700.000	54.76	1.78	56.54	-48.66	105.20	100	127	Peak
4		5720.000	57.30	1.87	59.17	-51.63	110.80	100	127	Peak
5		5725.000	57.73	1.89	59.62	-62.58	122.20	100	127	Peak
6		5870.000	100.65	2.26	102.91	N/A	N/A	100	127	Peak
7		5895.000	82.22	2.26	84.48	-45.72	130.20	100	127	Peak
8		5925.000	75.24	2.27	77.50	-30.70	108.20	100	127	Peak
9		5928.000	77.03	2.27	79.30	-28.90	108.20	100	127	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.