


Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

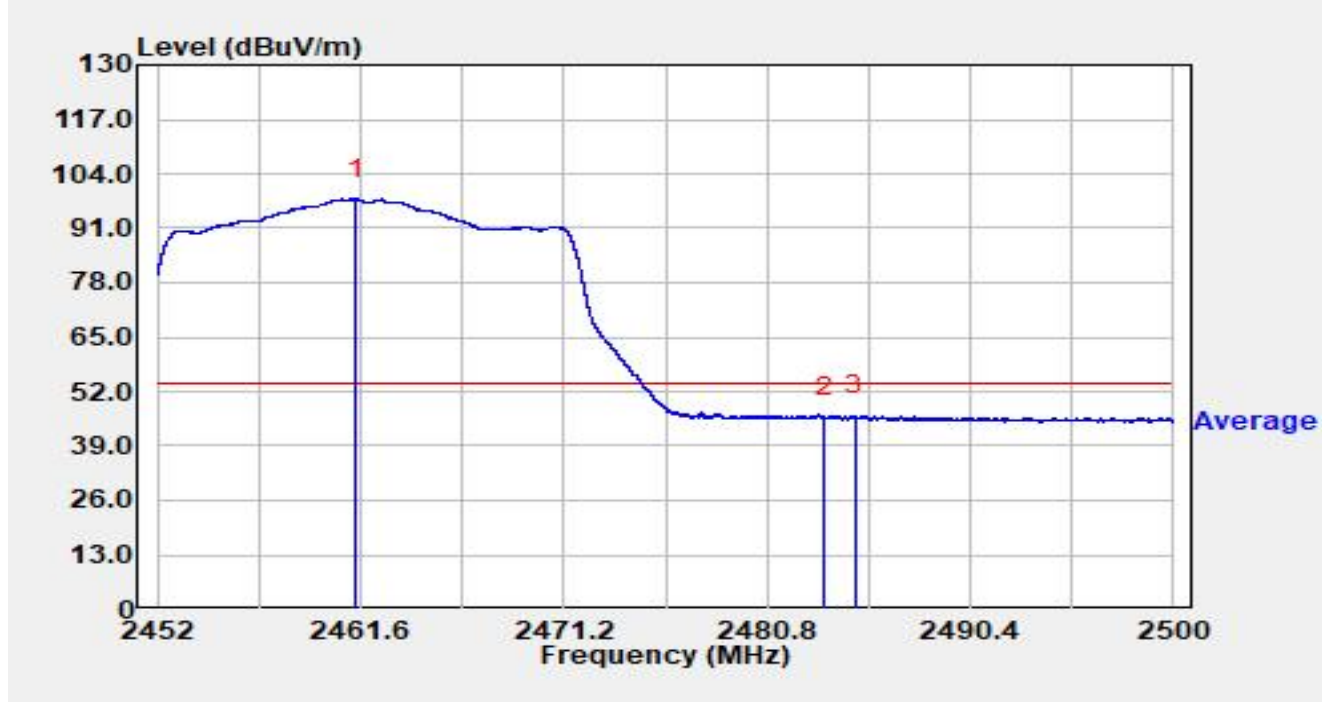


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.360	65.65	32.37	98.02	N/A	N/A	Average
2		2483.500	13.59	32.40	45.99	-8.01	54.00	Average
3	*	2484.928	13.84	32.40	46.24	-7.76	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

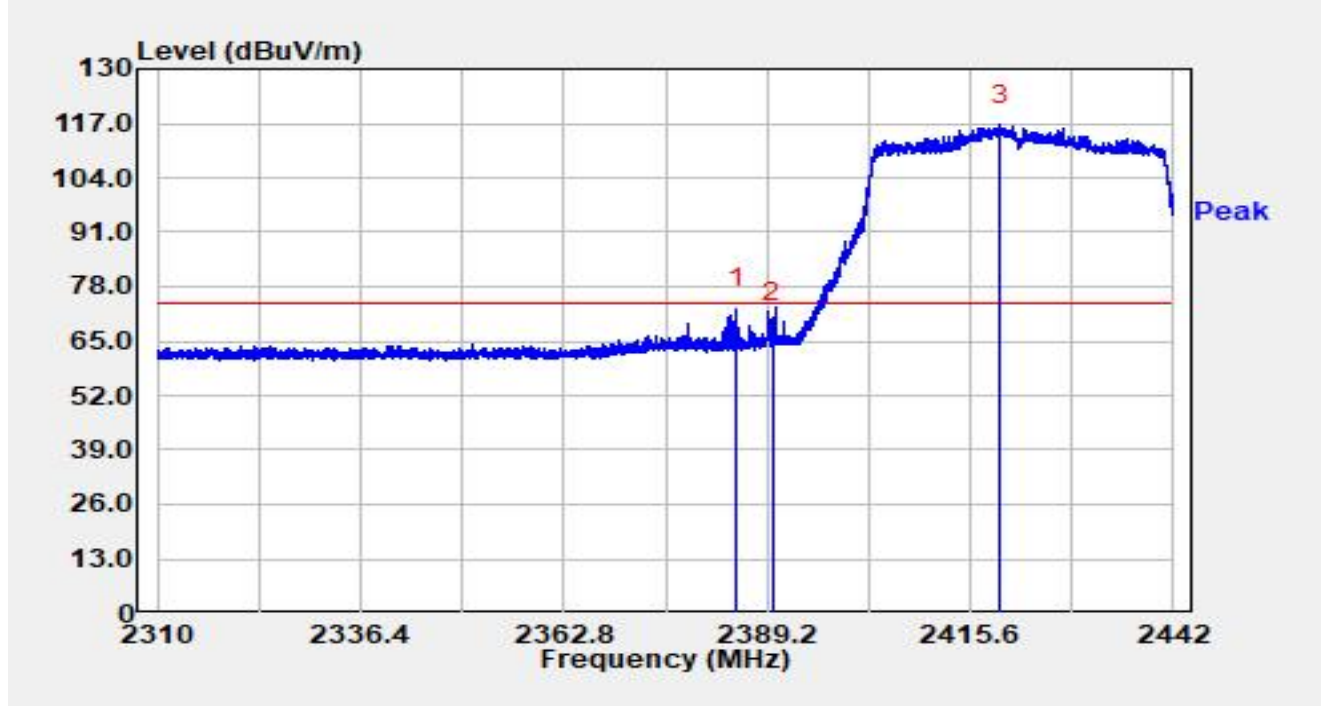


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.174	40.16	32.53	72.69	-1.31	74.00	Peak
2		2390.000	37.03	32.52	69.55	-4.45	74.00	Peak
3		2419.507	84.16	32.45	116.61	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

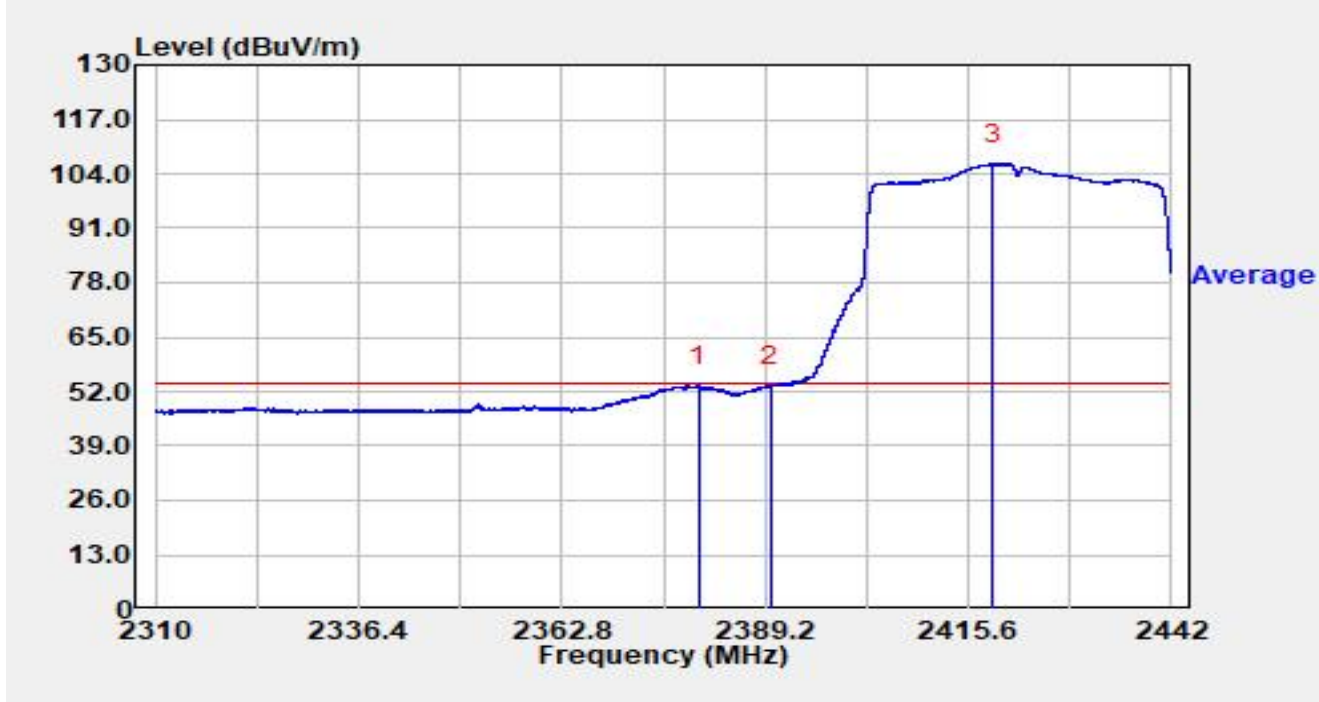


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.660	20.89	32.54	53.43	-0.57	54.00	Average
2		2390.000	20.86	32.52	53.38	-0.62	54.00	Average
3		2418.860	73.84	32.45	106.29	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

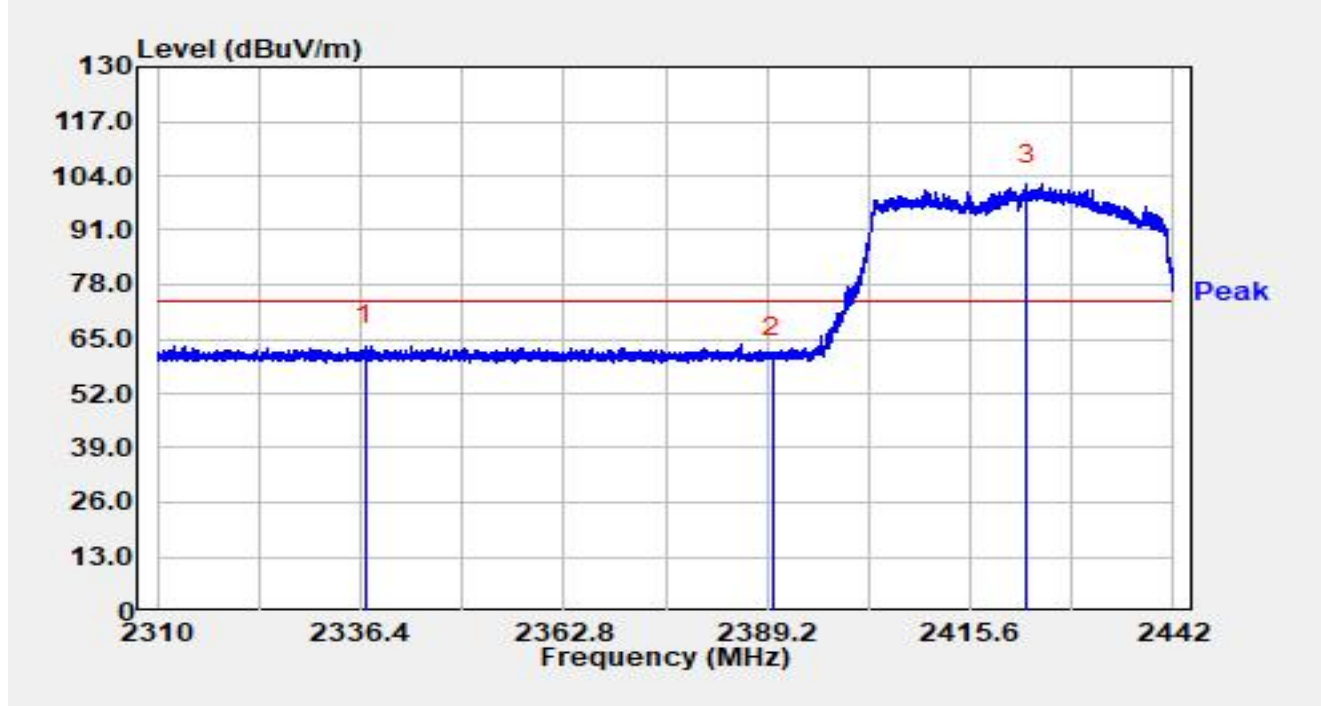


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2337.060	30.54	32.75	63.29	-10.71	74.00	Peak
2		2390.000	27.99	32.52	60.51	-13.49	74.00	Peak
3		2422.886	69.55	32.44	101.99	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

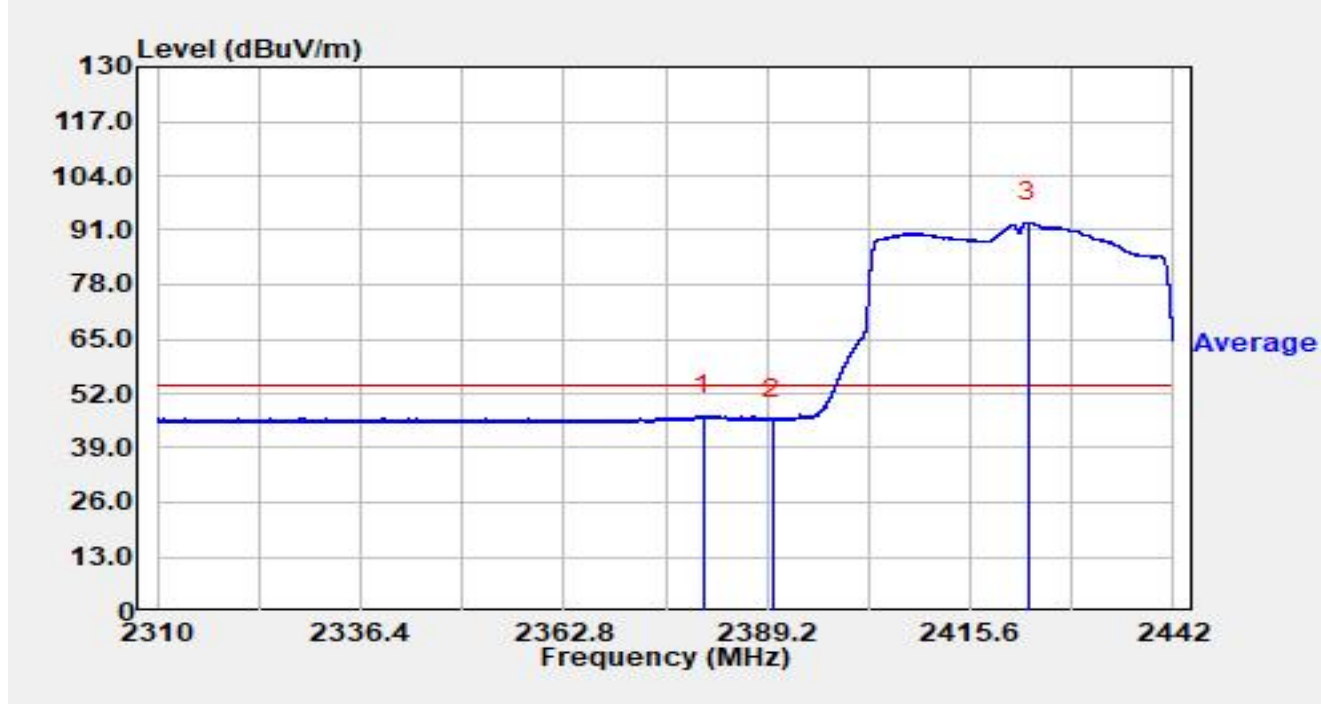


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.976	14.18	32.54	46.72	-7.28	54.00	Average
2		2390.000	13.42	32.52	45.93	-8.07	54.00	Average
3		2423.045	60.51	32.43	92.95	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2437MHz		

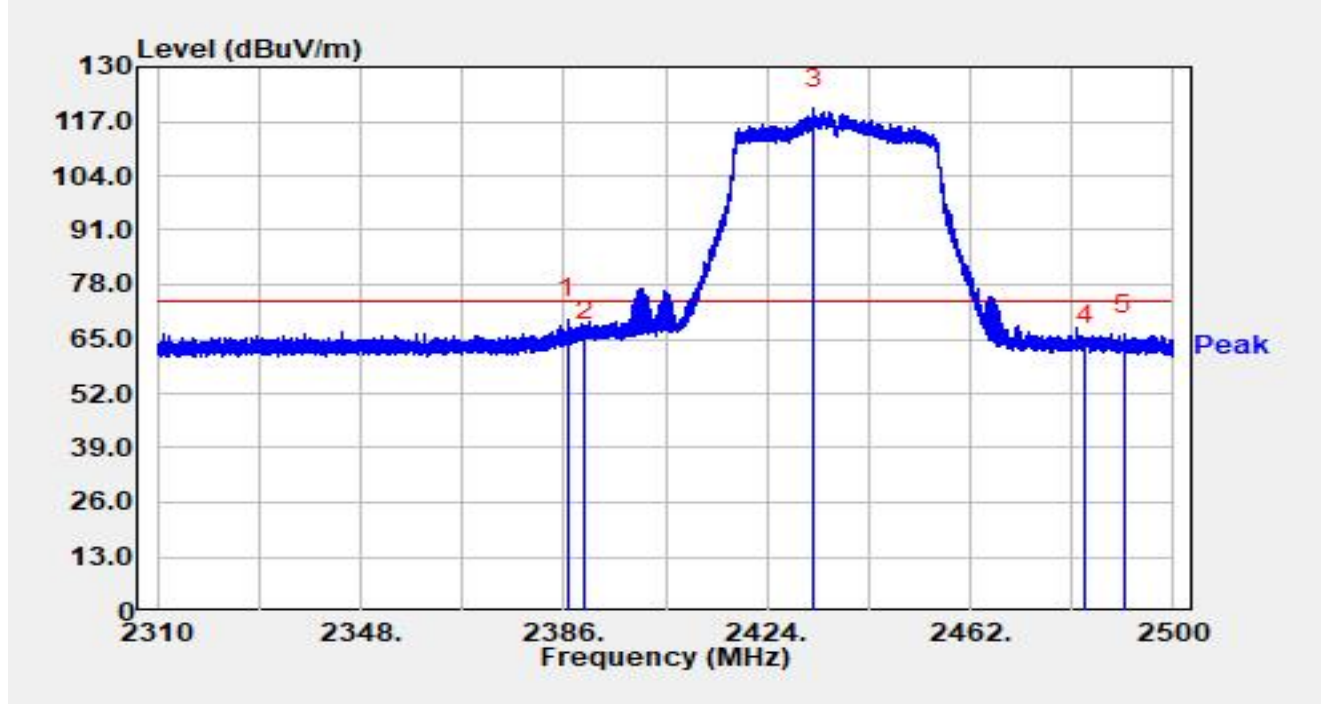


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.779	37.26	32.52	69.79	-4.21	74.00	Peak
2		2390.000	32.04	32.52	64.56	-9.44	74.00	Peak
3		2432.664	87.67	32.40	120.07	N/A	N/A	Peak
4		2483.500	31.25	32.40	63.65	-10.35	74.00	Peak
5		2490.747	33.67	32.39	66.06	-7.94	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2437MHz		

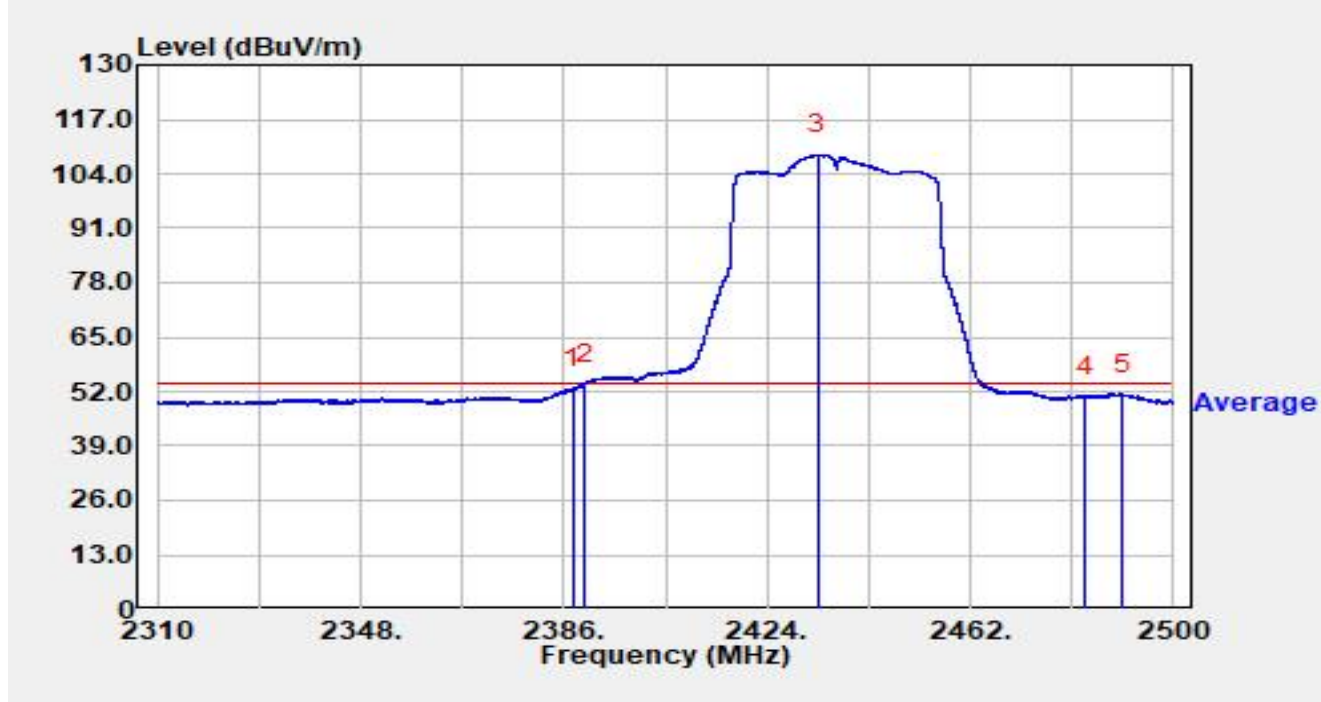


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2387.710	20.46	32.52	52.98	-1.02	54.00	Average
2	*	2390.000	21.38	32.52	53.90	-0.10	54.00	Average
3		2433.576	76.13	32.40	108.53	N/A	N/A	Average
4		2483.500	18.20	32.40	50.60	-3.40	54.00	Average
5		2490.519	19.11	32.39	51.50	-2.50	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2437MHz		

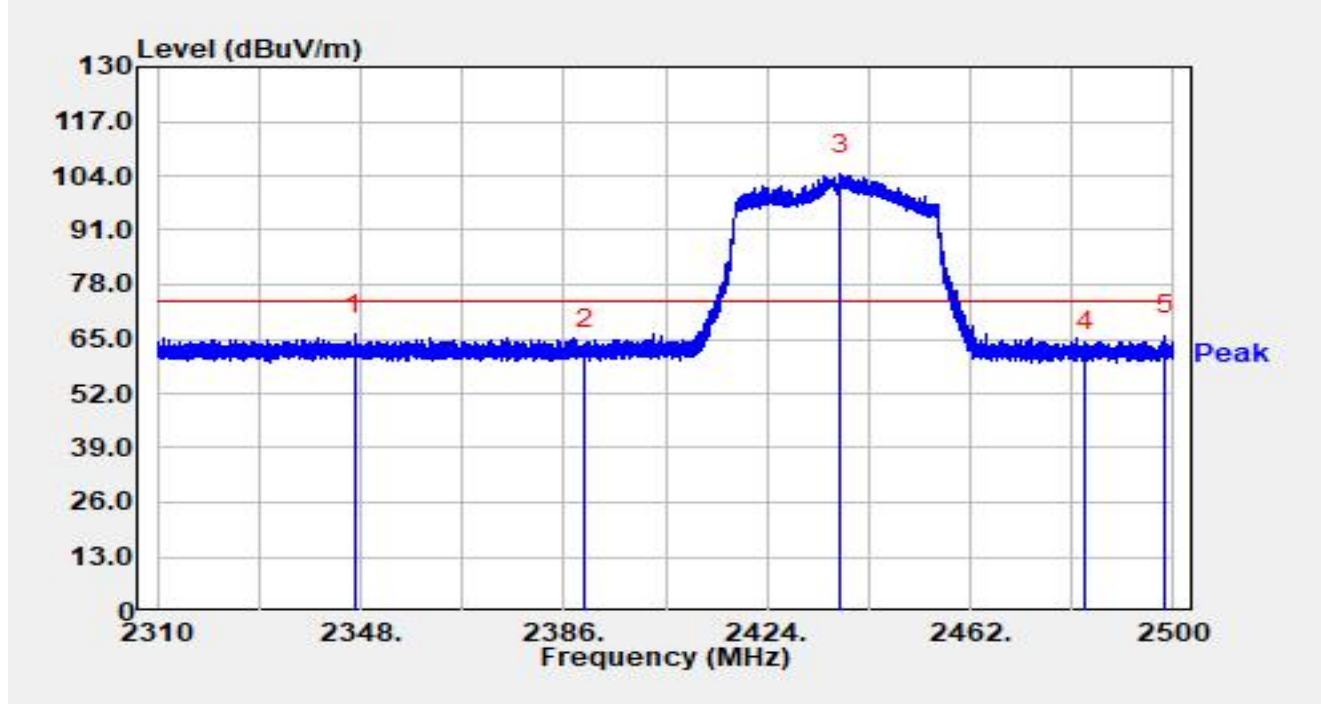


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2347.012	33.40	32.75	66.15	-7.85	74.00	Peak
2		2390.000	29.98	32.52	62.50	-11.50	74.00	Peak
3		2437.642	71.91	32.39	104.29	N/A	N/A	Peak
4		2483.500	29.55	32.40	61.95	-12.05	74.00	Peak
5		2498.556	33.38	32.40	65.78	-8.22	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2437MHz		

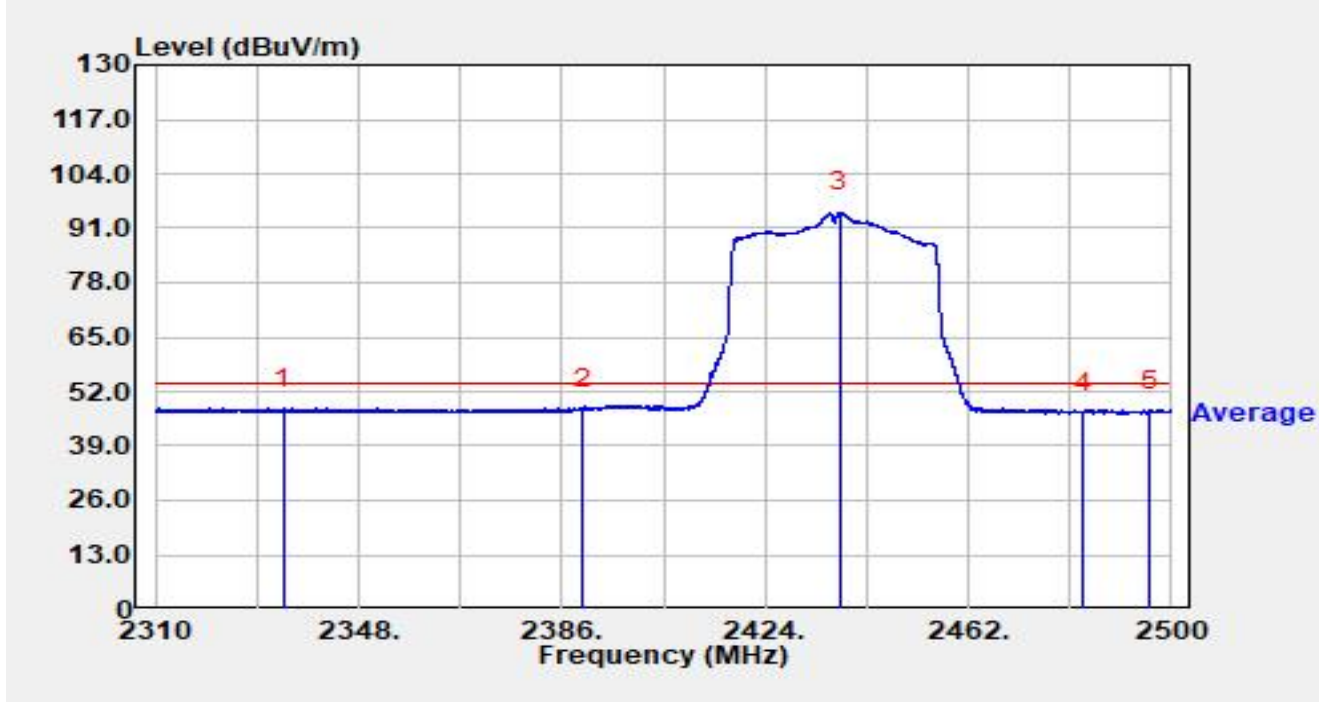


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2333.997	15.22	32.75	47.96	-6.04	54.00	Average
2		2390.000	15.14	32.52	47.65	-6.35	54.00	Average
3		2437.870	62.47	32.39	94.86	N/A	N/A	Average
4		2483.500	14.67	32.40	47.07	-6.93	54.00	Average
5		2495.839	15.18	32.40	47.58	-6.42	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

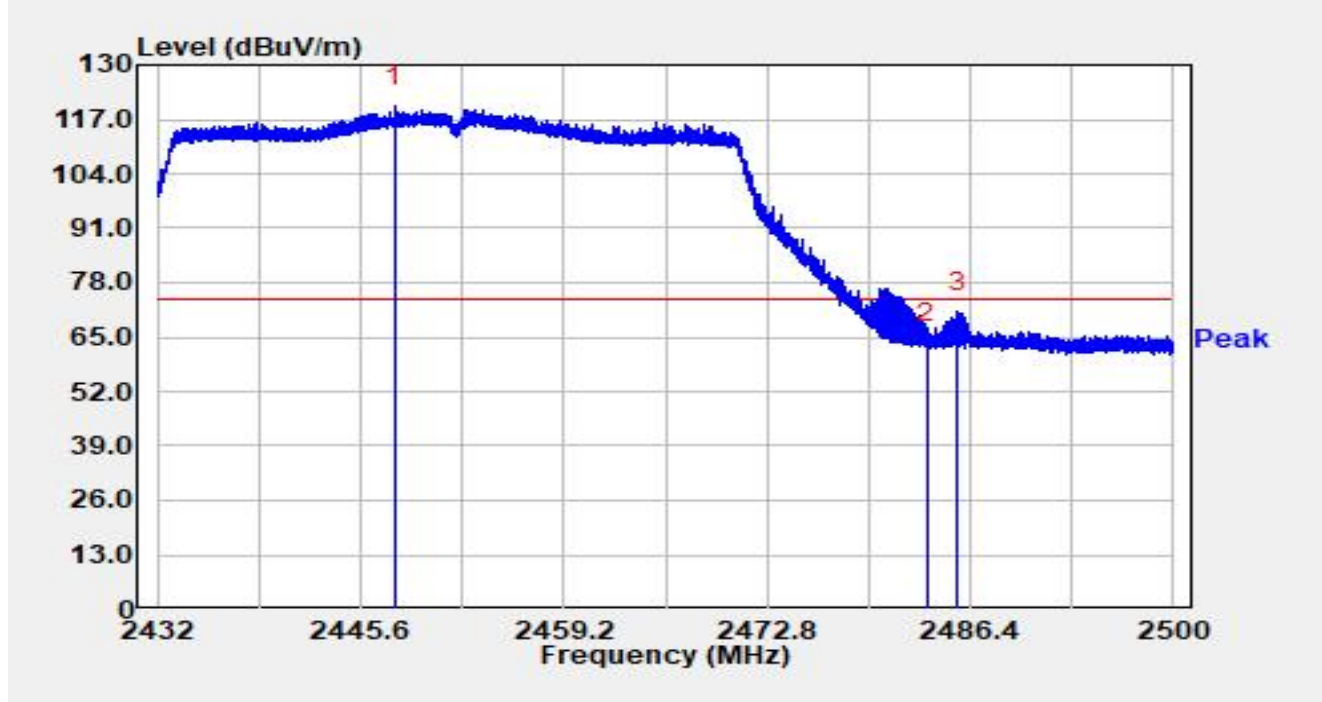


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2447.858	87.63	32.38	120.00	N/A	N/A	Peak
2		2483.500	31.09	32.40	63.48	-10.52	74.00	Peak
3	*	2485.564	38.61	32.40	71.01	-2.99	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

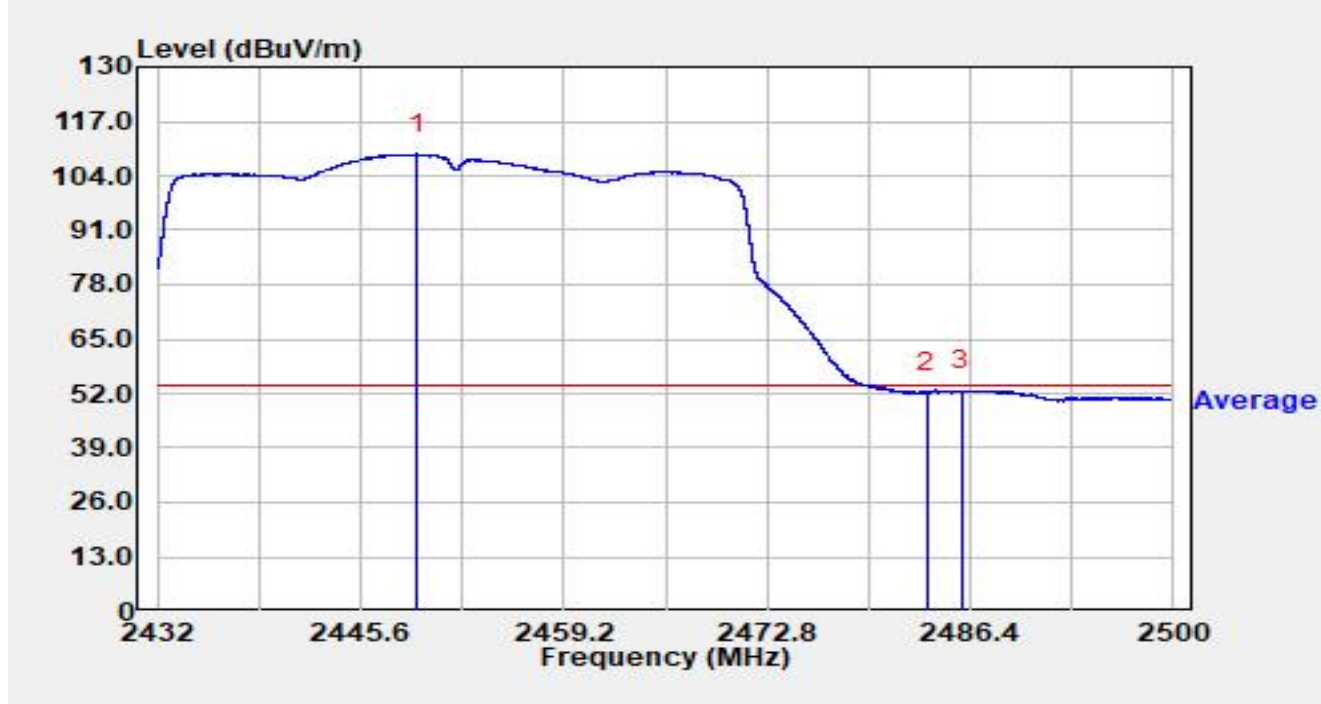


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2449.347	76.78	32.38	109.15	N/A	N/A	Average
2		2483.500	19.67	32.40	52.07	-1.93	54.00	Average
3	*	2485.788	20.33	32.40	52.73	-1.27	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

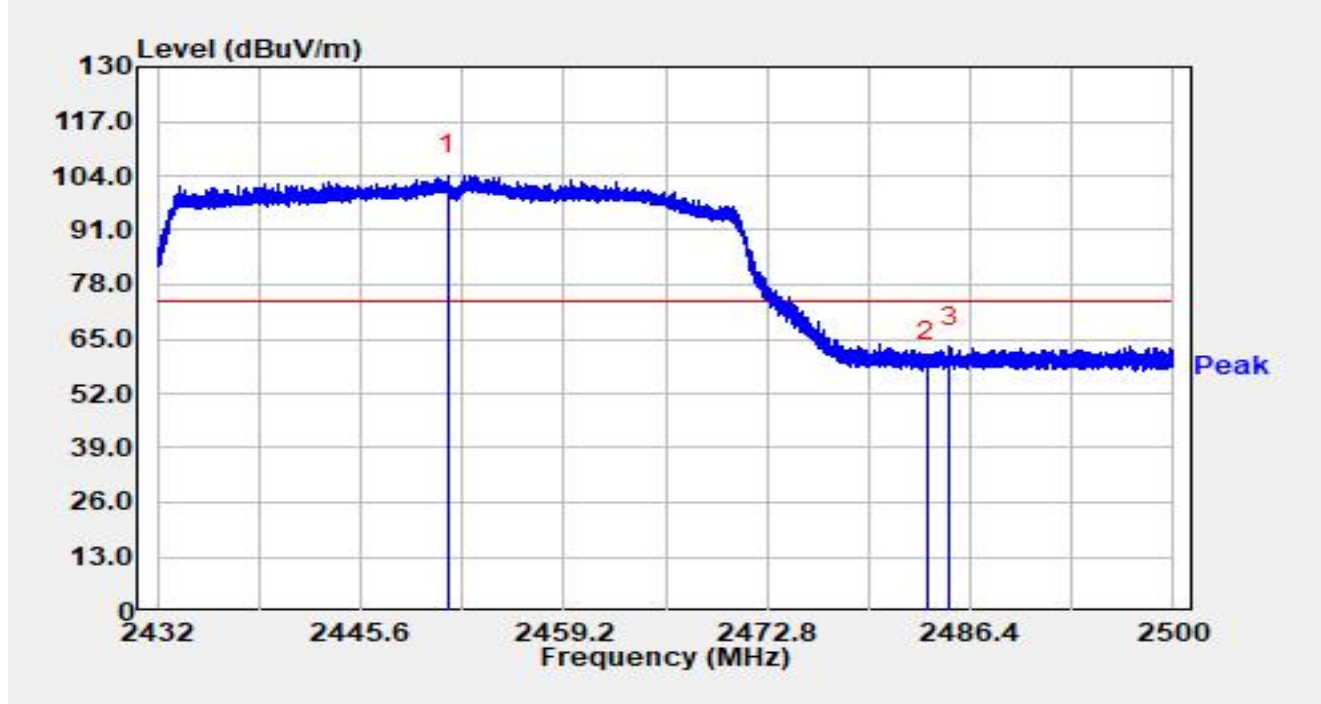


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.427	71.76	32.37	104.13	N/A	N/A	Peak
2		2483.500	27.14	32.40	59.54	-14.46	74.00	Peak
3	*	2484.992	30.76	32.40	63.16	-10.84	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

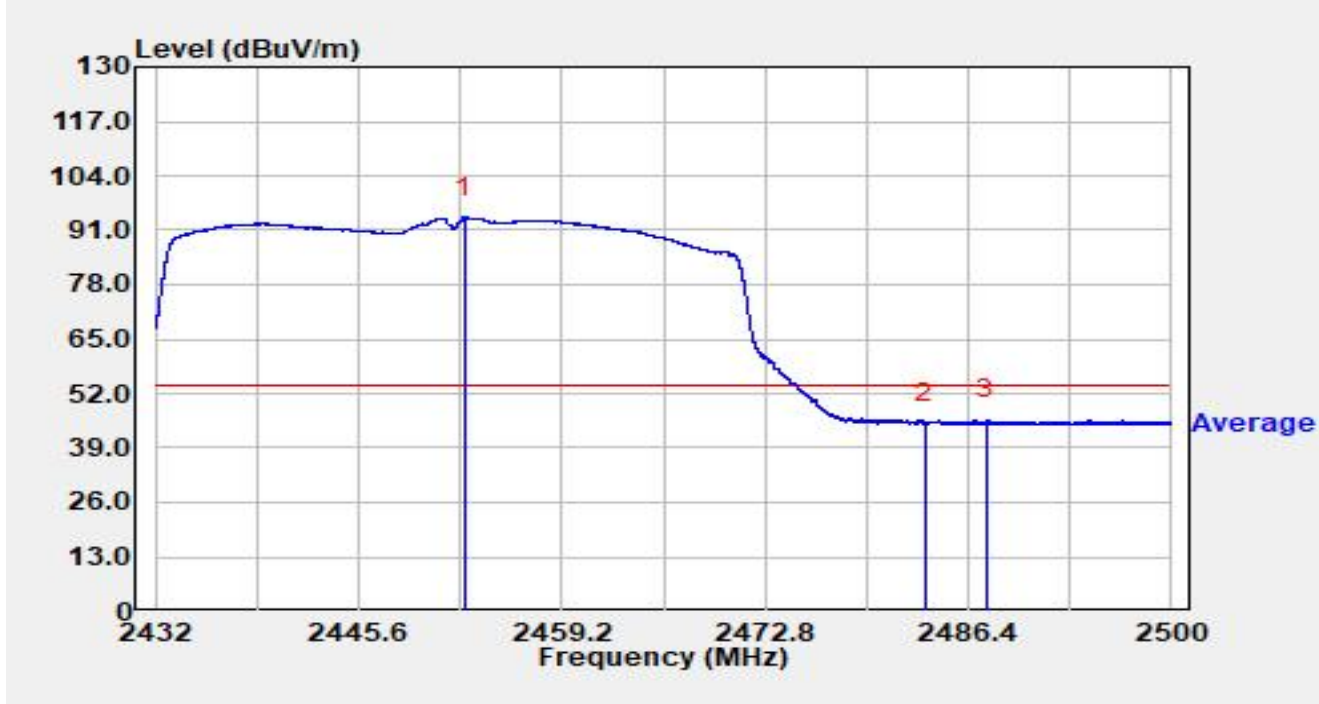


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2452.706	61.69	32.37	94.06	N/A	N/A	Average
2		2483.500	12.58	32.40	44.98	-9.02	54.00	Average
3	*	2487.631	13.44	32.39	45.83	-8.17	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

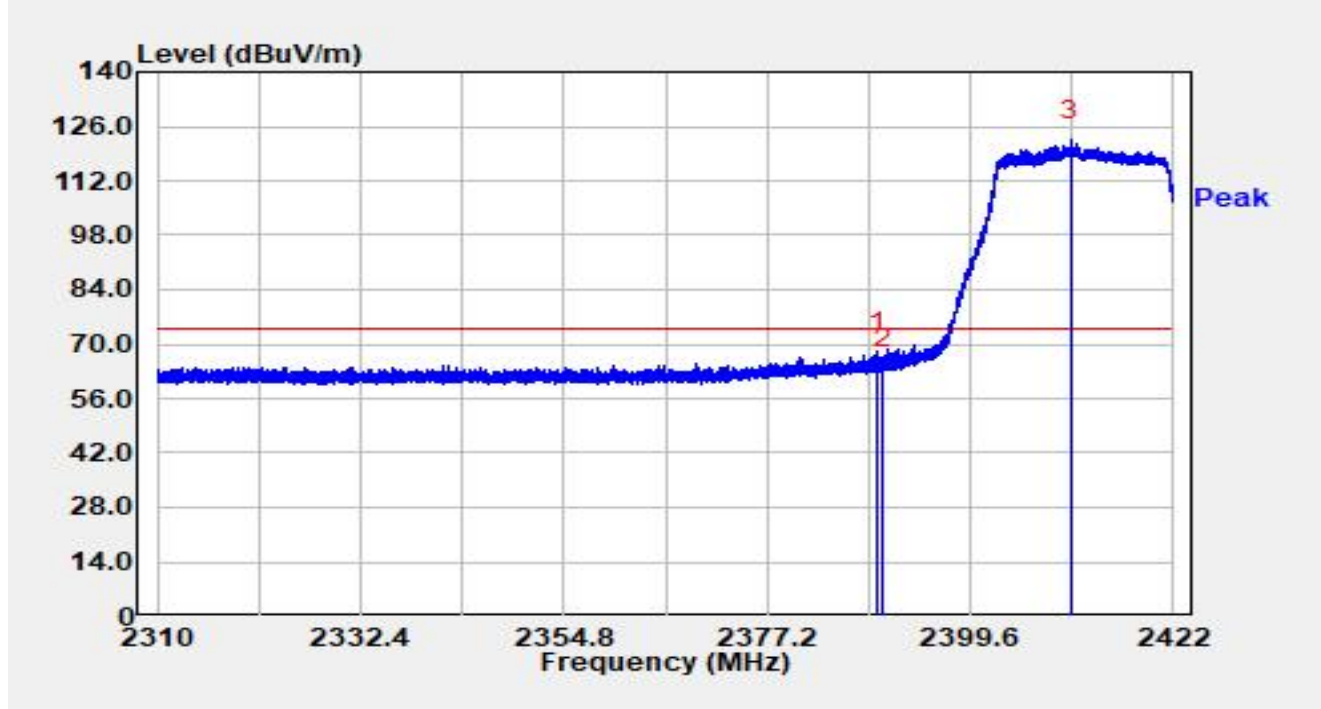


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.442	35.50	32.52	68.02	-5.98	74.00	Peak
2		2390.000	31.04	32.52	63.56	-10.44	74.00	Peak
3		2410.643	89.84	32.47	122.30	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

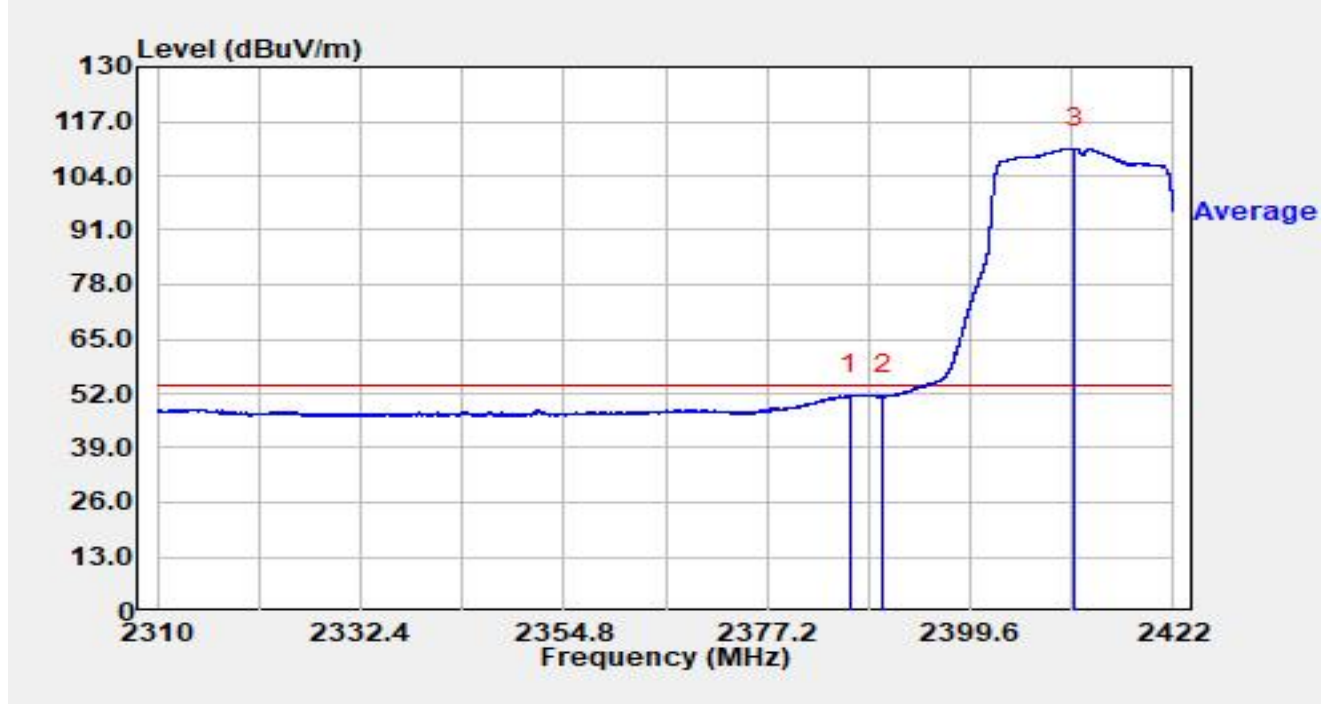


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.350	19.19	32.53	51.72	-2.28	54.00	Average
2		2390.000	19.05	32.52	51.57	-2.43	54.00	Average
3		2411.091	78.09	32.46	110.55	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

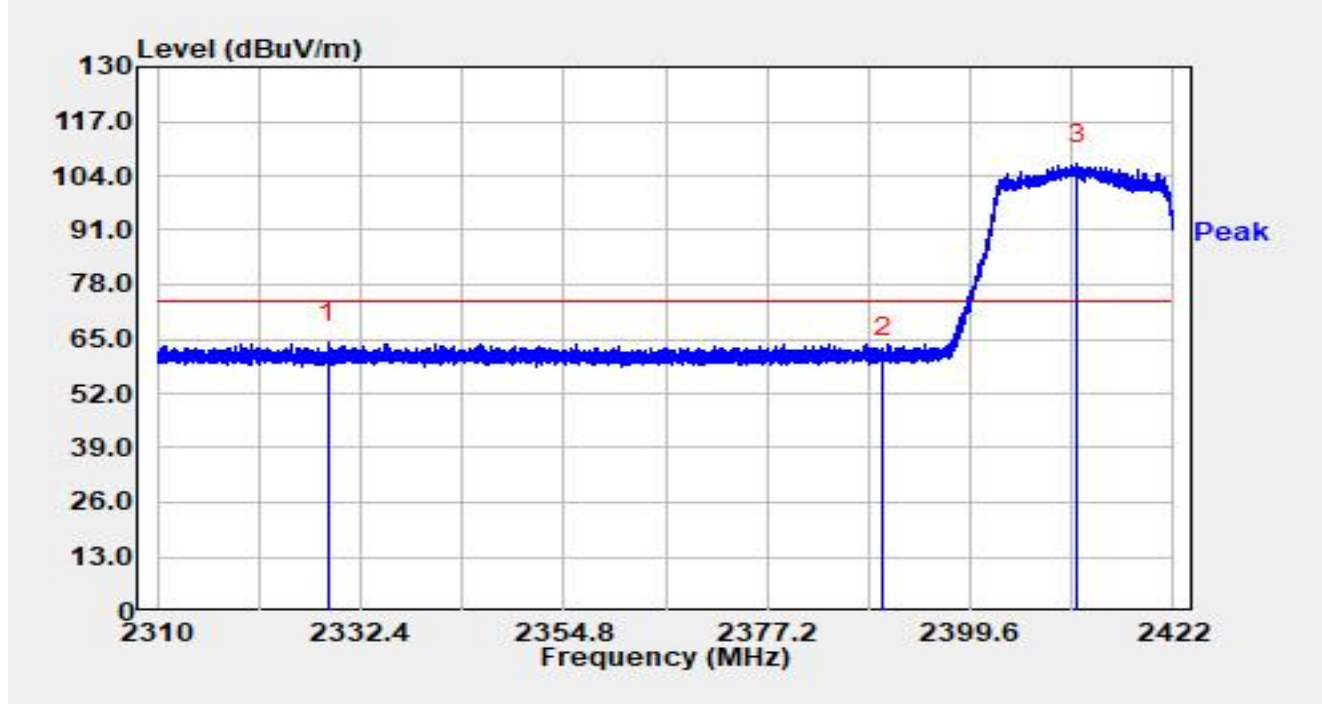


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2328.827	31.39	32.75	64.14	-9.86	74.00	Peak
2		2390.000	27.93	32.52	60.45	-13.55	74.00	Peak
3		2411.338	74.42	32.46	106.88	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

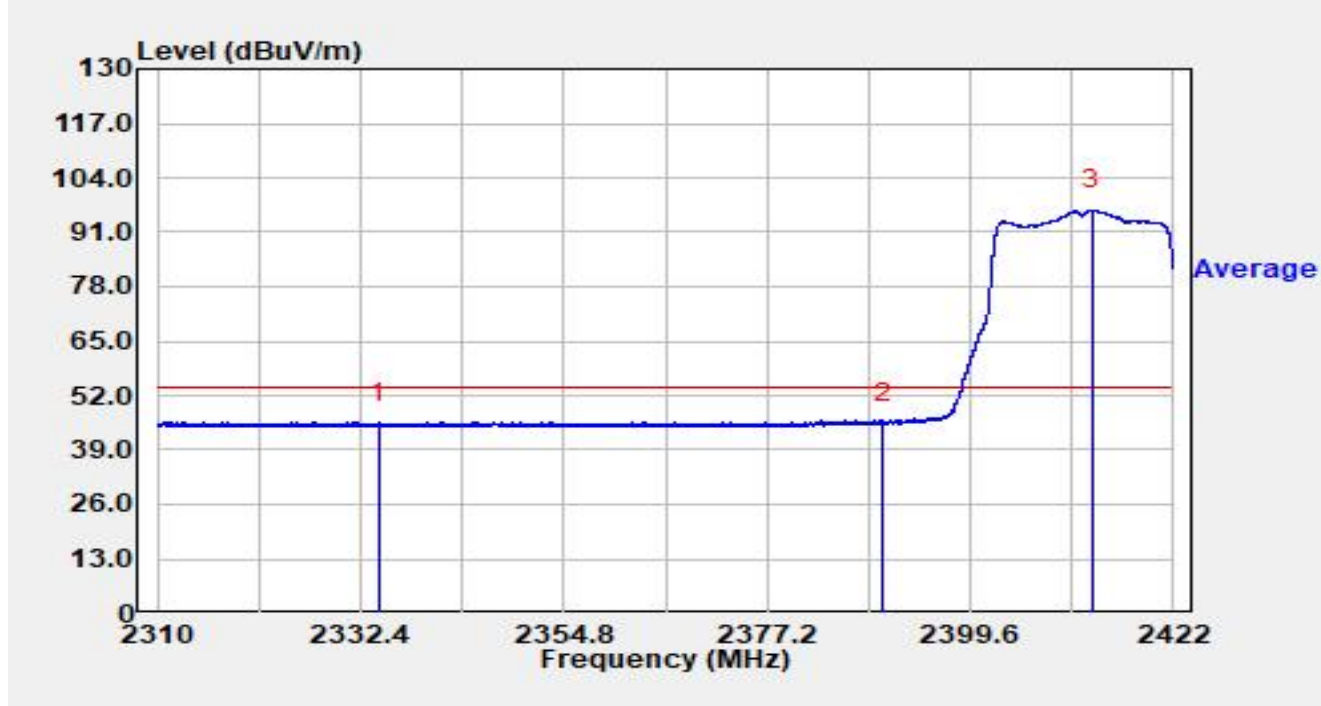


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2334.427	12.66	32.75	45.40	-8.60	54.00	Average
2	*	2390.000	12.90	32.52	45.42	-8.58	54.00	Average
3		2412.973	63.87	32.46	96.33	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

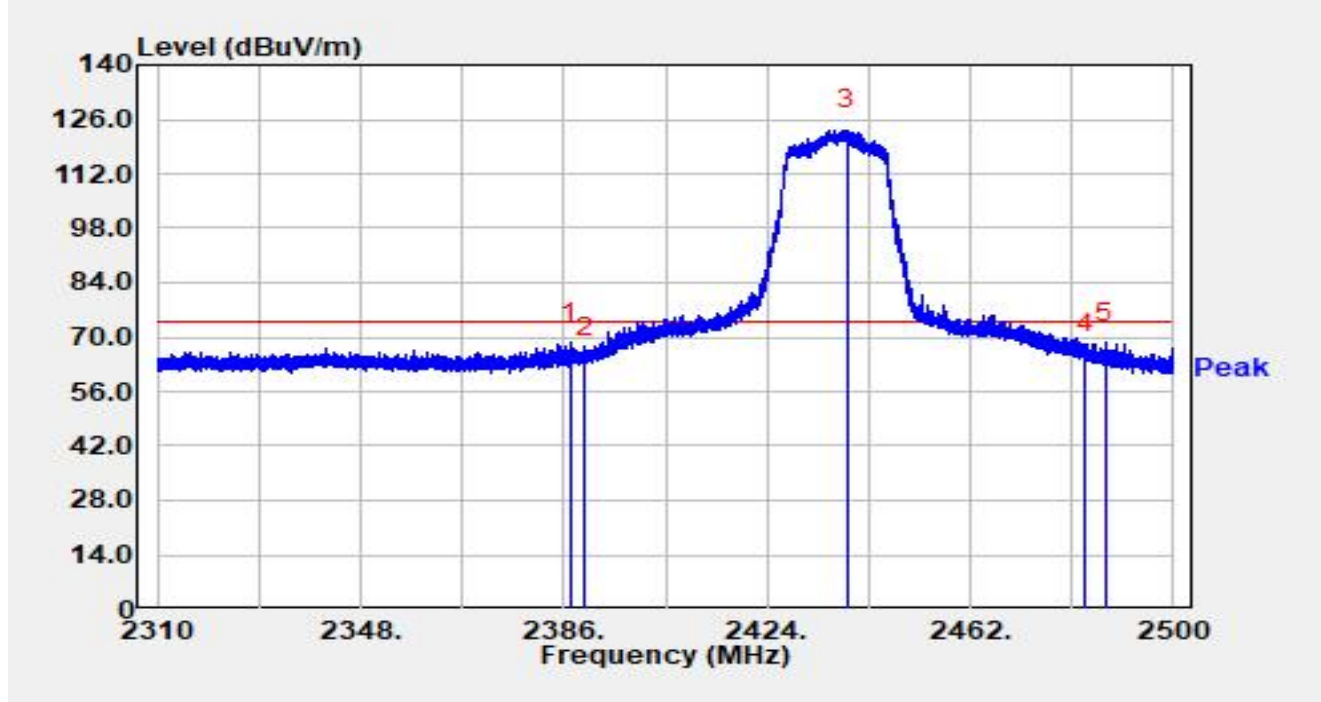


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2387.311	35.91	32.52	68.44	-5.56	74.00	Peak
2		2390.000	31.96	32.52	64.48	-9.52	74.00	Peak
3		2439.010	90.89	32.38	123.28	N/A	N/A	Peak
4		2483.500	33.23	32.40	65.63	-8.37	74.00	Peak
5	*	2487.365	36.19	32.39	68.58	-5.42	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

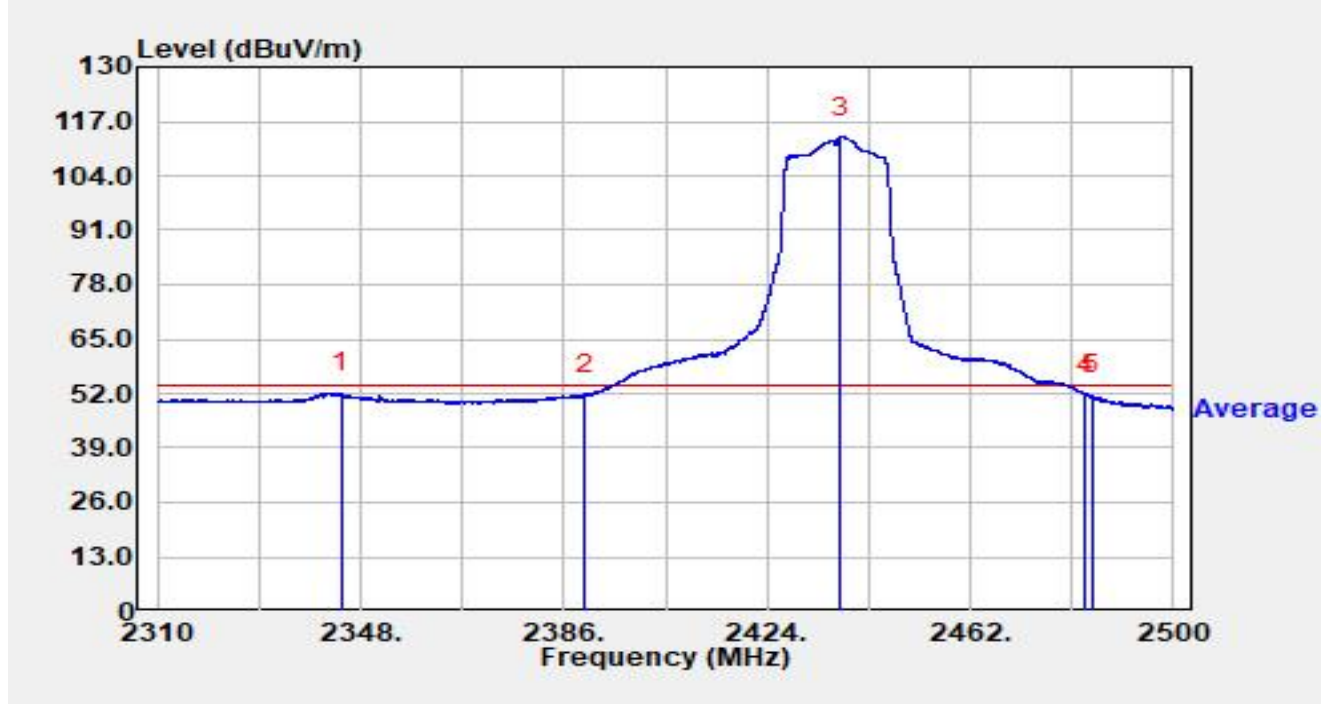


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2344.352	19.28	32.75	52.02	-1.98	54.00	Average
2		2390.000	19.27	32.52	51.78	-2.22	54.00	Average
3		2437.813	80.93	32.39	113.32	N/A	N/A	Average
4		2483.500	19.42	32.40	51.82	-2.18	54.00	Average
5		2484.724	19.18	32.40	51.57	-2.43	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

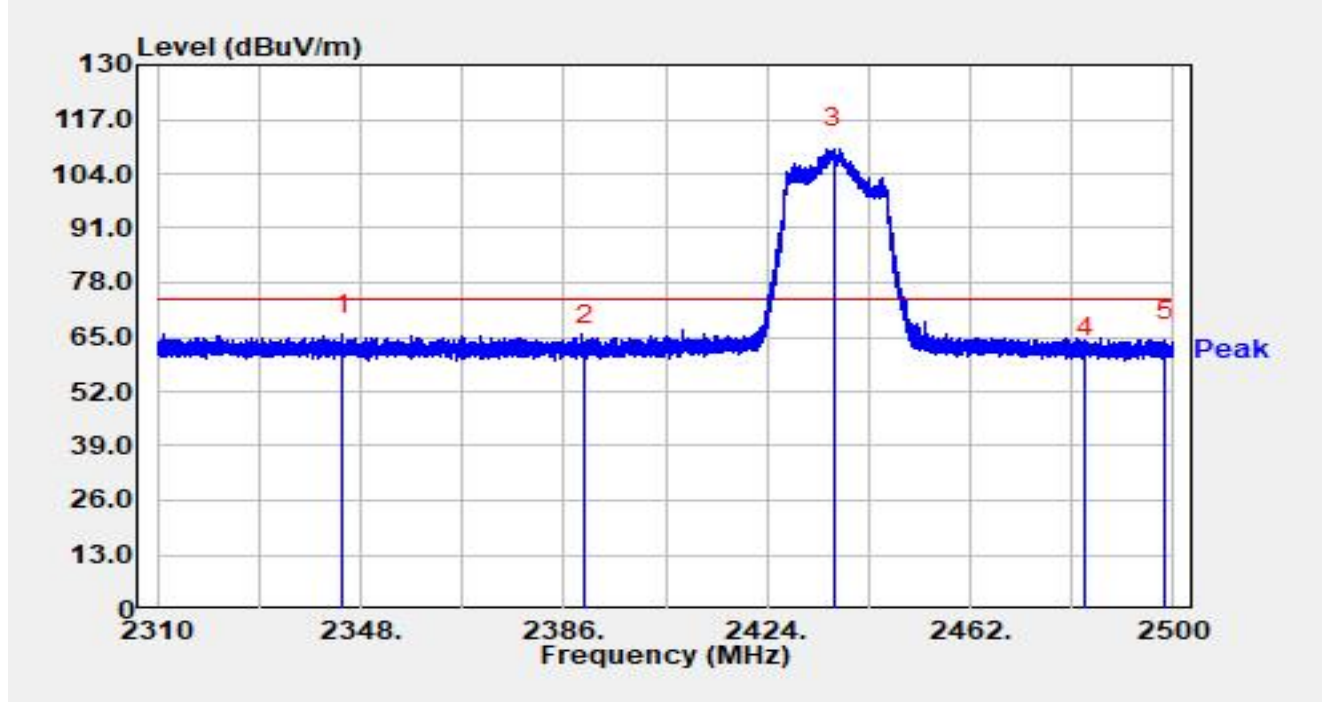


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2344.770	32.94	32.75	65.69	-8.31	74.00	Peak
2		2390.000	30.67	32.52	63.19	-10.81	74.00	Peak
3		2436.597	77.57	32.39	109.96	N/A	N/A	Peak
4		2483.500	27.84	32.40	60.24	-13.76	74.00	Peak
5		2498.461	31.86	32.40	64.26	-9.74	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

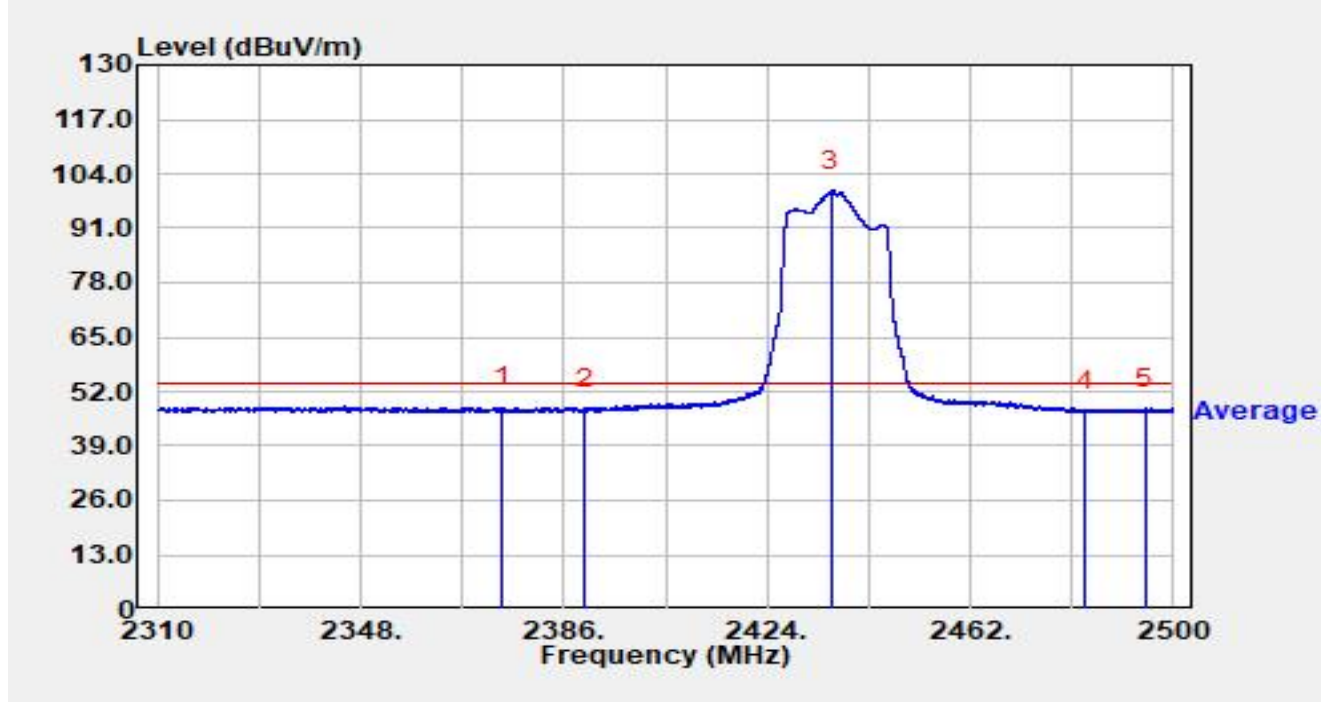


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2374.581	15.60	32.57	48.17	-5.83	54.00	Average
2		2390.000	15.09	32.52	47.61	-6.39	54.00	Average
3		2436.084	67.57	32.39	99.97	N/A	N/A	Average
4		2483.500	15.14	32.40	47.54	-6.46	54.00	Average
5		2494.661	15.63	32.39	48.02	-5.98	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

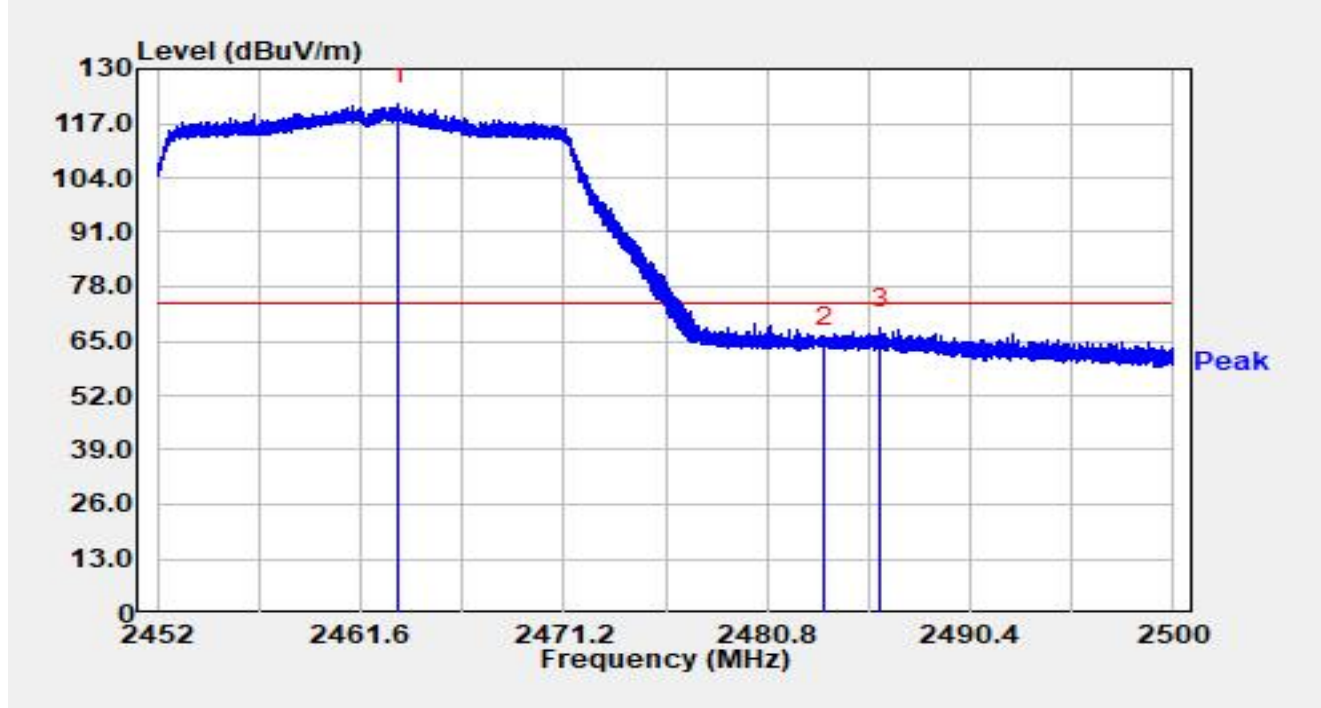


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.376	89.04	32.38	121.42	N/A	N/A	Peak
2		2483.500	31.07	32.40	63.46	-10.54	74.00	Peak
3	*	2486.123	35.68	32.40	68.08	-5.92	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

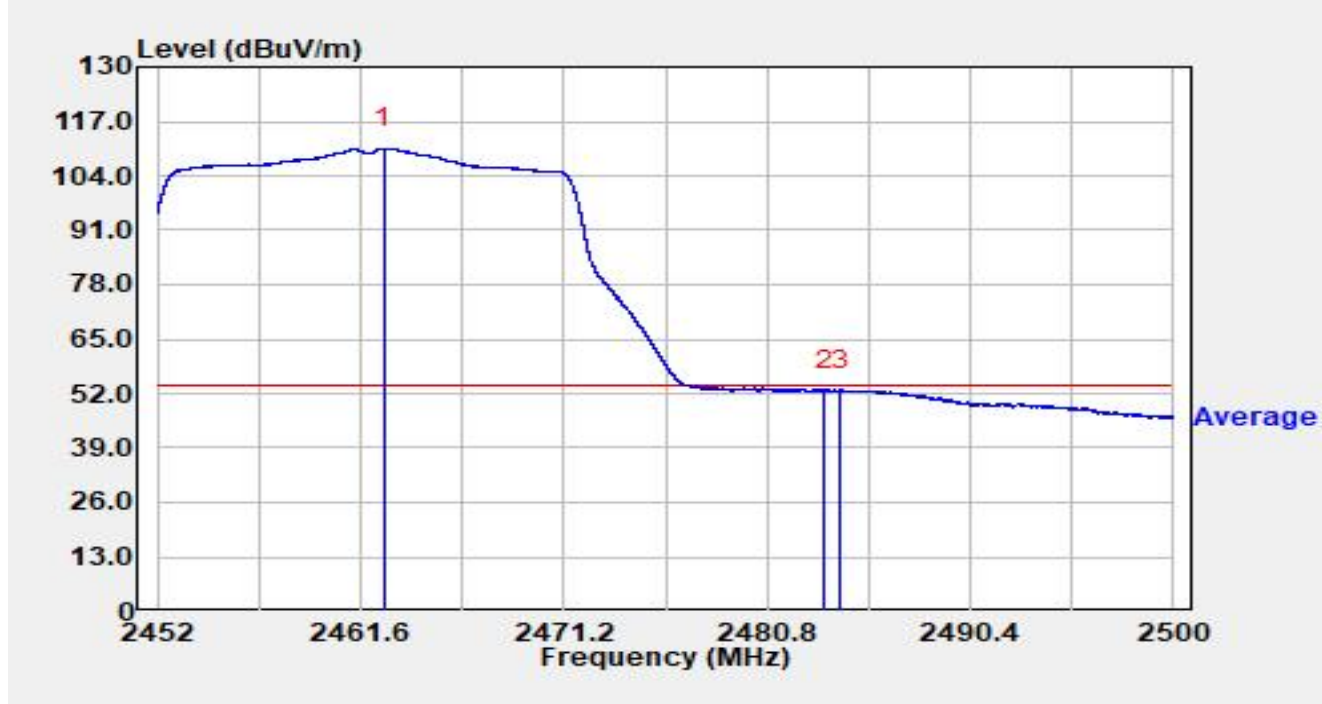


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.733	78.12	32.37	110.49	N/A	N/A	Average
2		2483.500	20.27	32.40	52.67	-1.33	54.00	Average
3	*	2484.261	20.51	32.40	52.90	-1.10	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

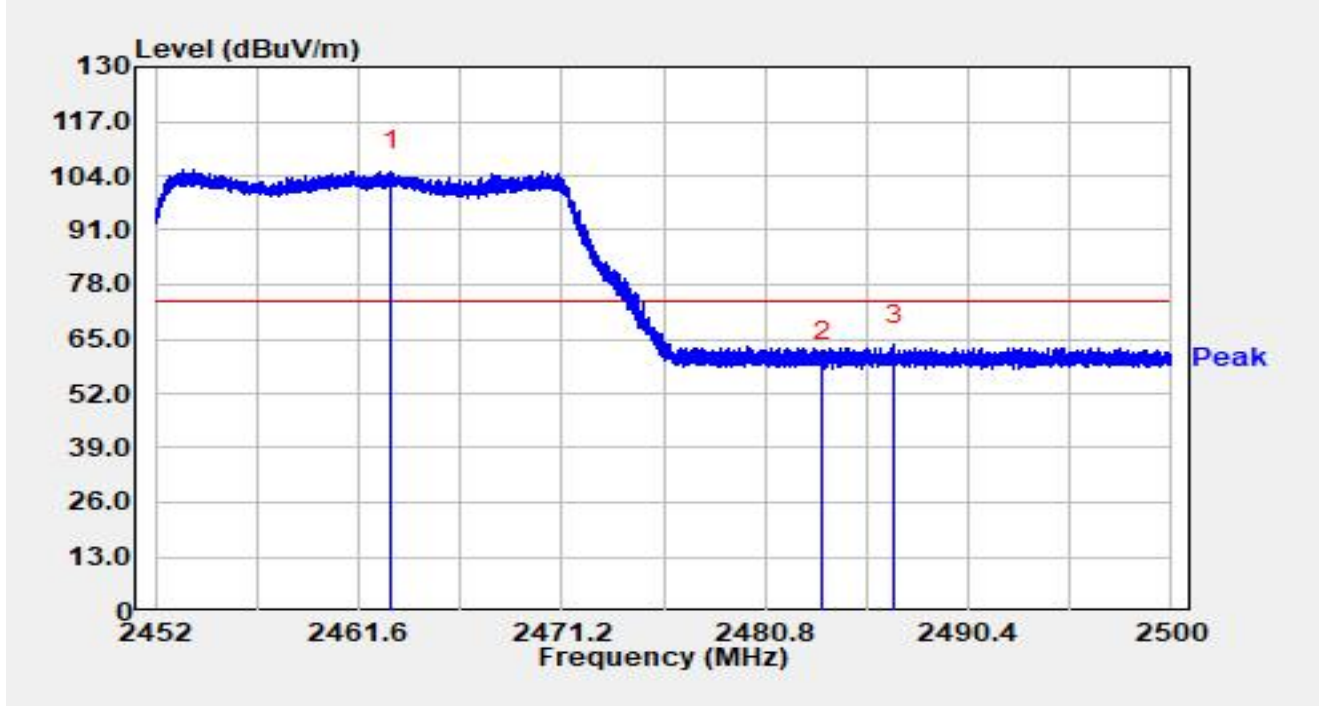


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.141	72.73	32.37	105.11	N/A	N/A	Peak
2		2483.500	27.35	32.40	59.75	-14.25	74.00	Peak
3	*	2486.901	31.32	32.39	63.72	-10.28	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

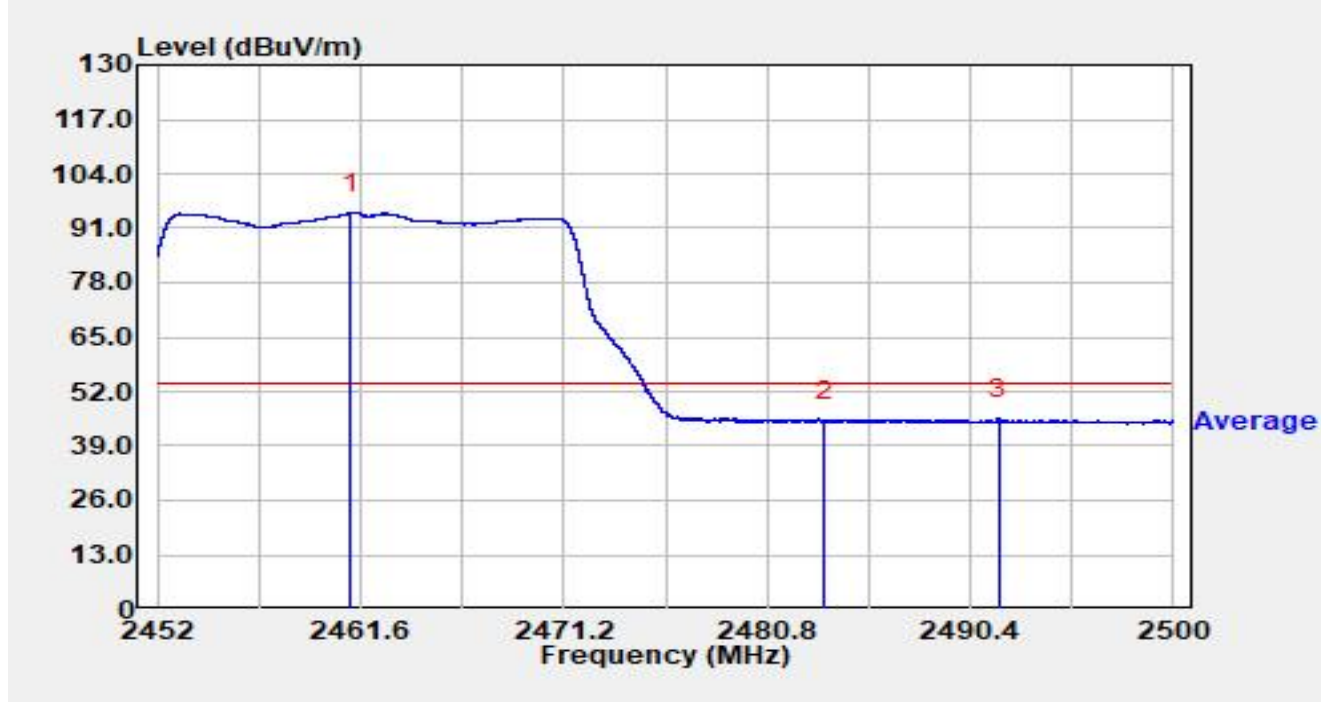


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.154	62.27	32.37	94.64	N/A	N/A	Average
2		2483.500	12.43	32.40	44.83	-9.17	54.00	Average
3	*	2491.749	13.14	32.39	45.52	-8.48	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

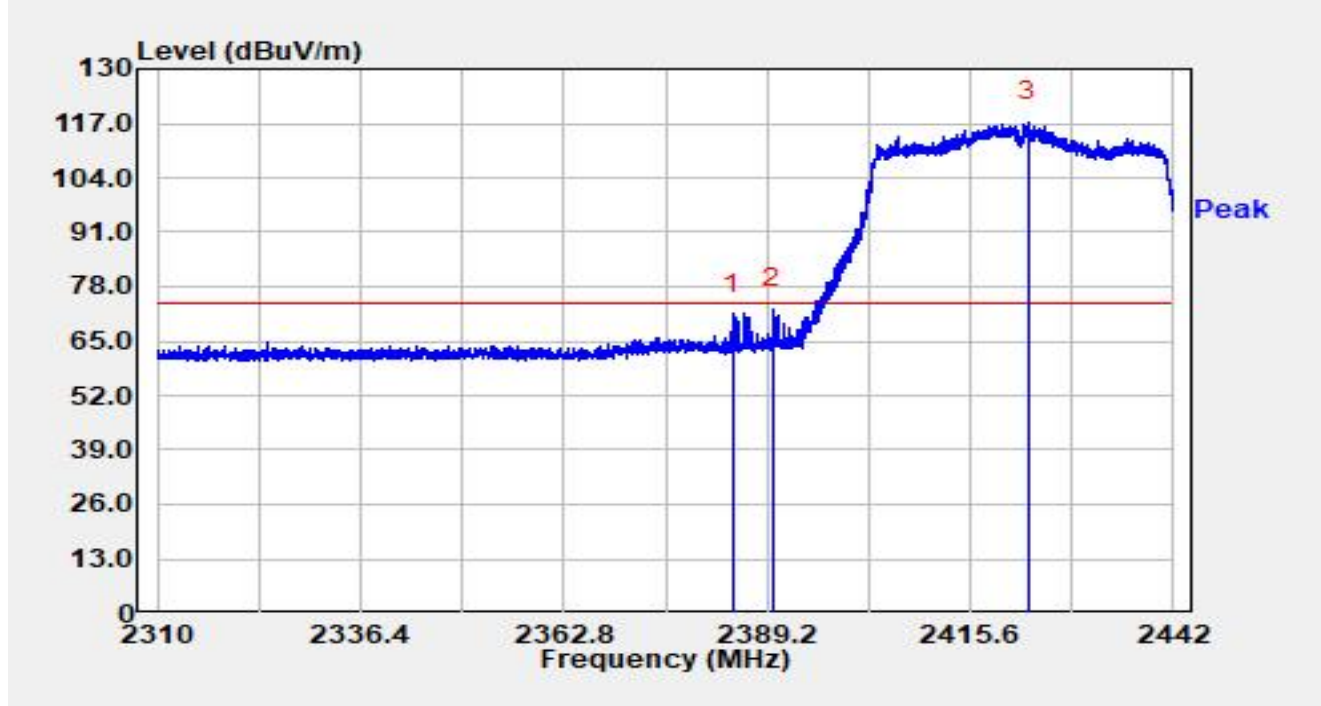


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2384.686	39.08	32.53	71.61	-2.39	74.00	Peak
2	*	2390.000	40.18	32.52	72.70	-1.30	74.00	Peak
3		2423.098	84.96	32.43	117.39	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

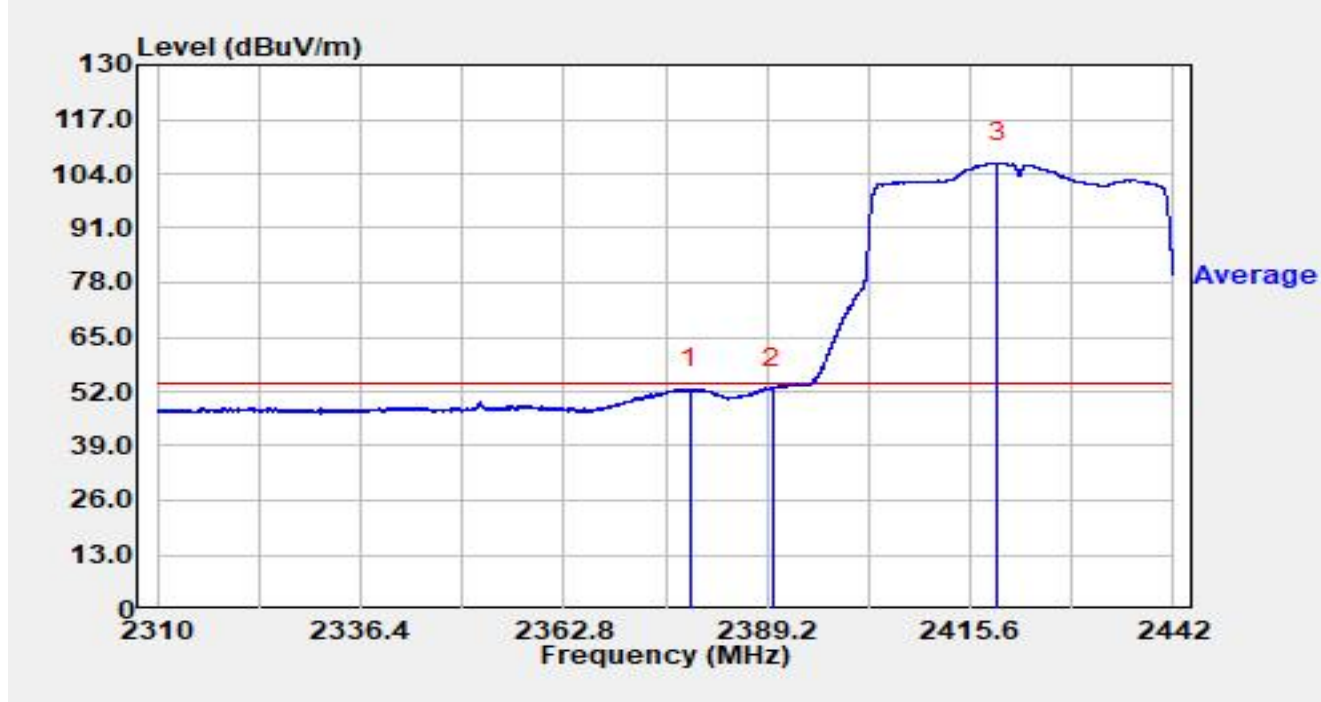


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2379.260	20.01	32.55	52.56	-1.44	54.00	Average
2	*	2390.000	20.21	32.52	52.72	-1.28	54.00	Average
3		2419.085	74.12	32.45	106.57	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

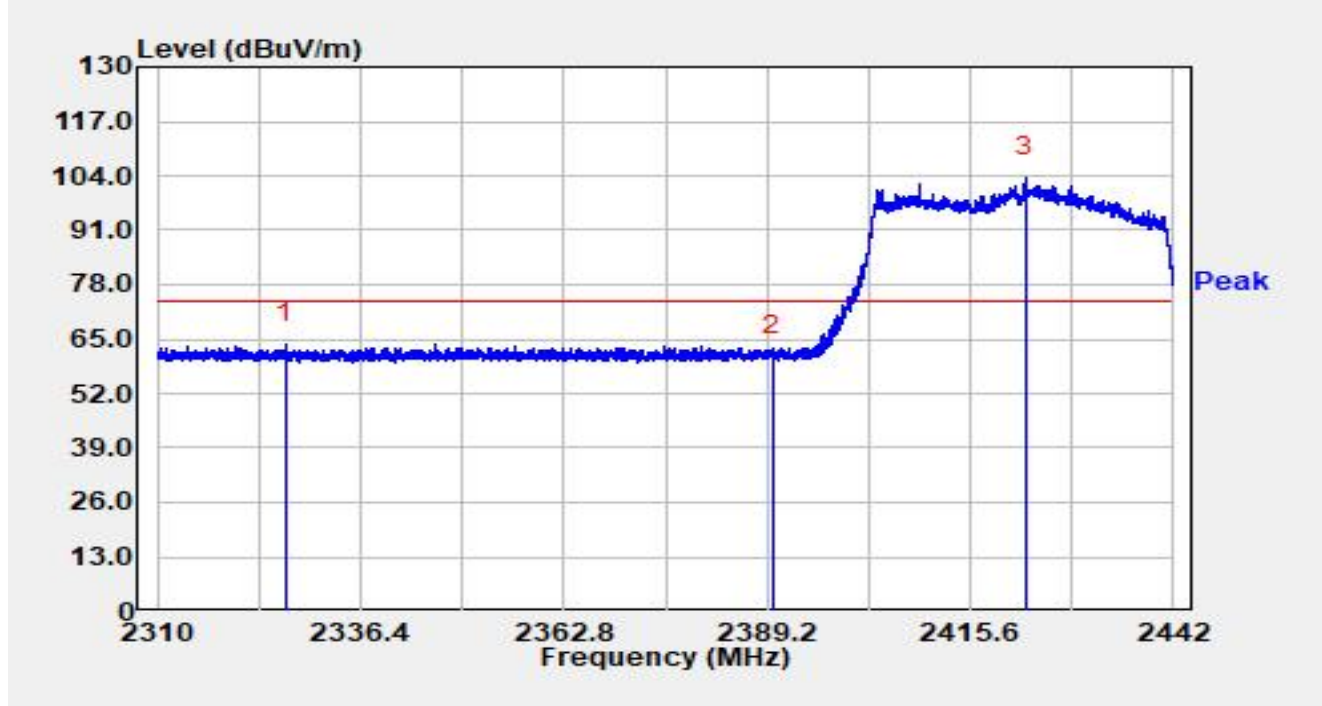


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2326.711	31.16	32.75	63.91	-10.09	74.00	Peak
2		2390.000	28.41	32.52	60.93	-13.07	74.00	Peak
3		2422.754	71.25	32.44	103.68	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

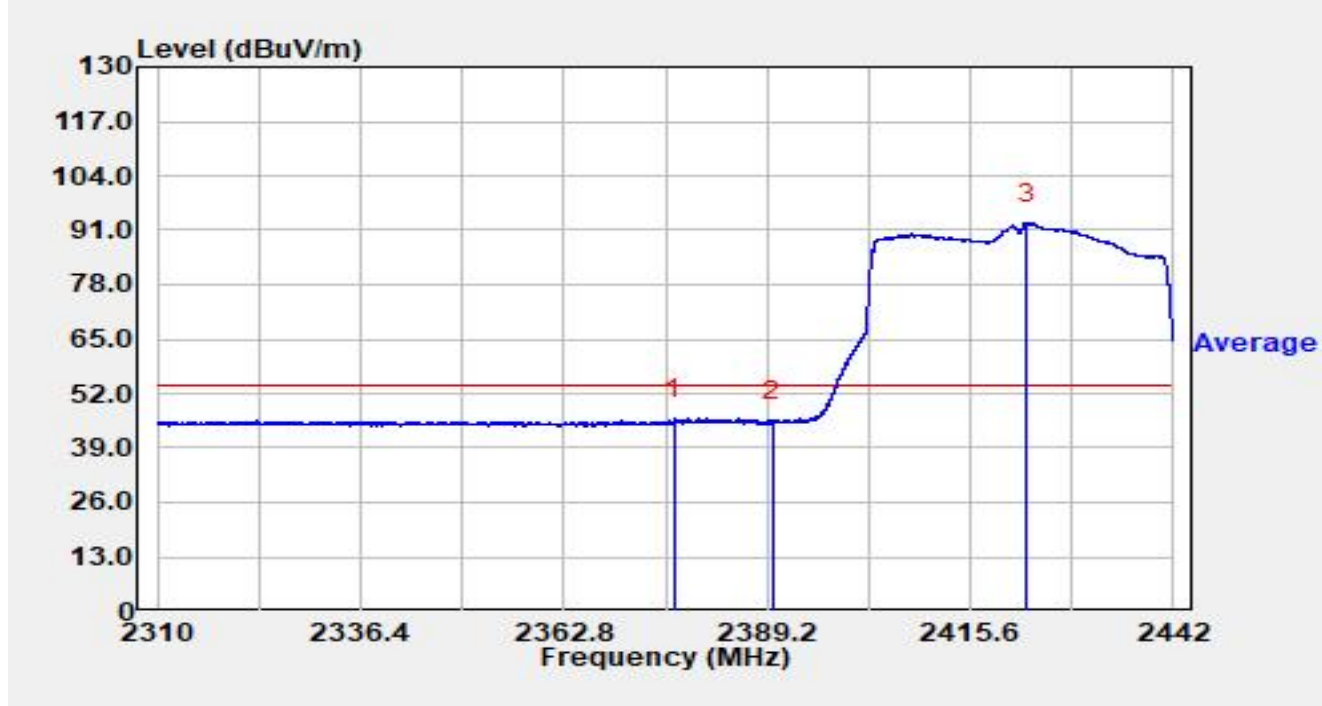


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2377.083	13.37	32.56	45.92	-8.08	54.00	Average
2		2390.000	12.84	32.52	45.36	-8.64	54.00	Average
3		2423.005	60.25	32.44	92.68	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-26
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

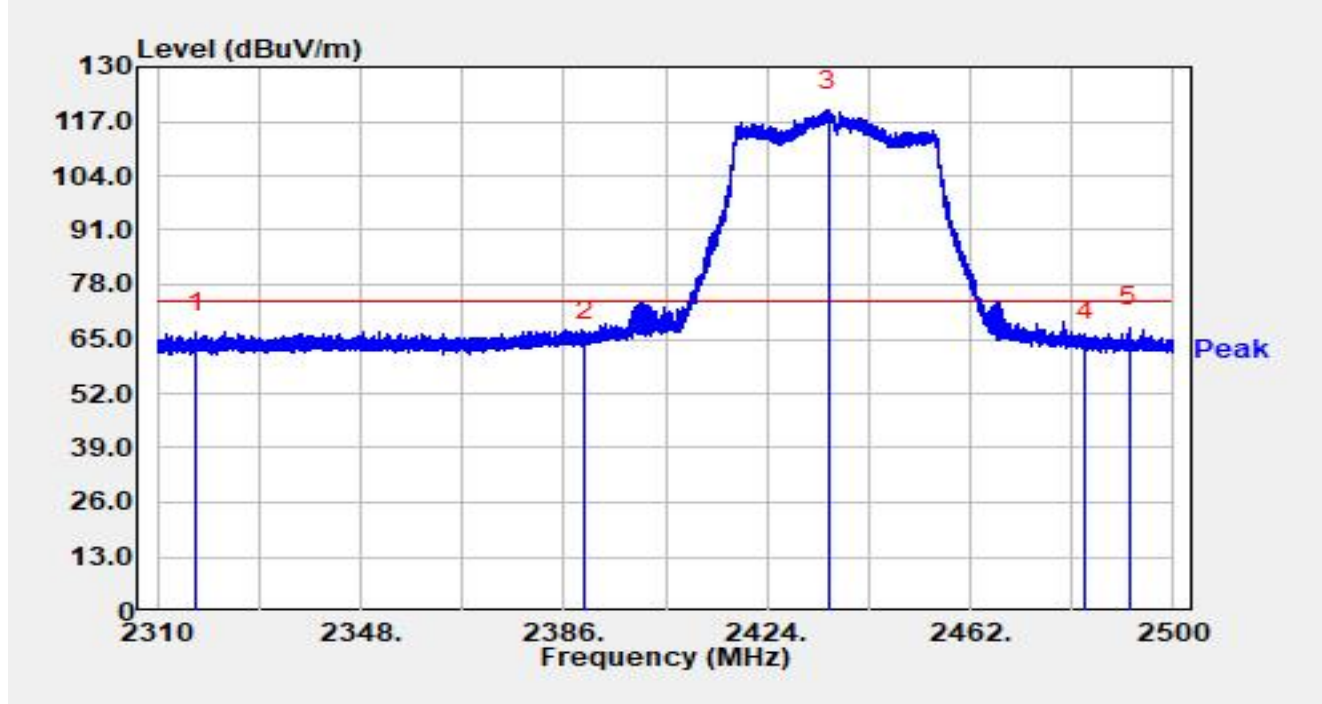


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2317.258	33.91	32.74	66.64	-7.36	74.00	Peak
2		2390.000	32.19	32.52	64.70	-9.30	74.00	Peak
3		2435.590	87.18	32.40	119.57	N/A	N/A	Peak
4		2483.500	31.92	32.40	64.32	-9.68	74.00	Peak
5	*	2491.811	35.33	32.39	67.72	-6.28	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-26
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

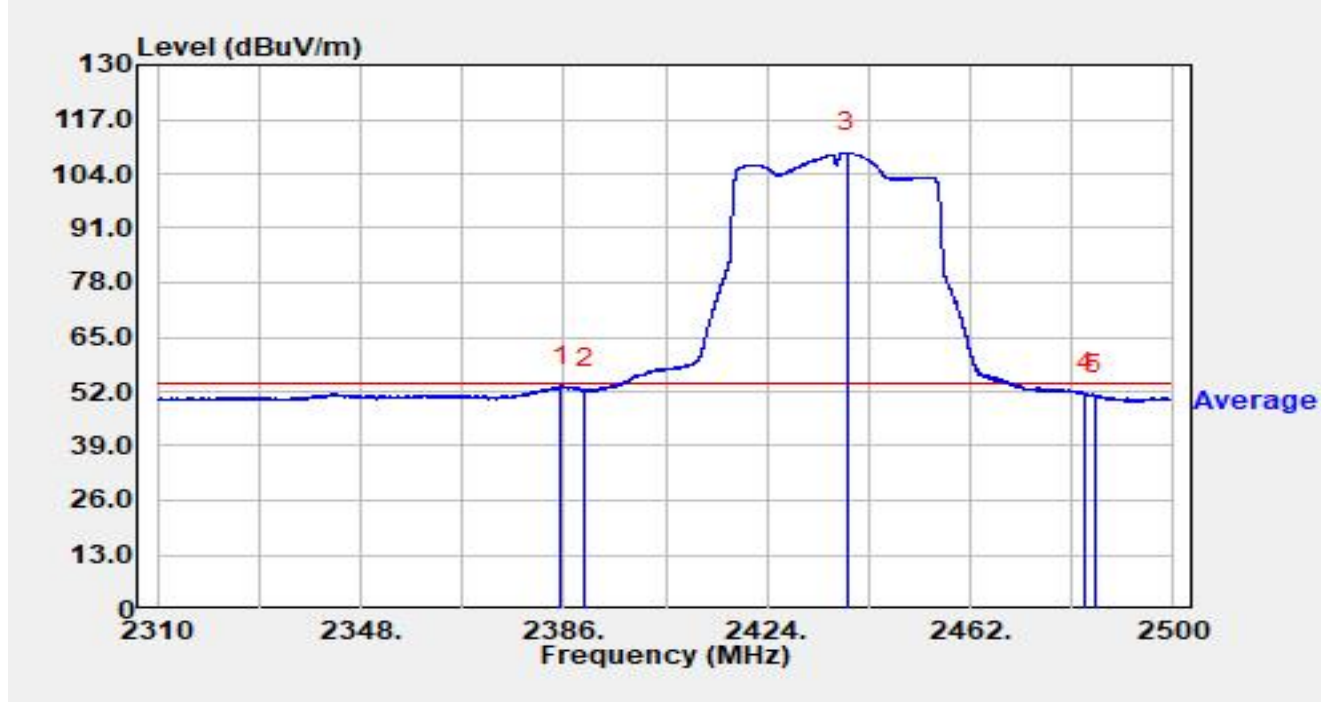


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.582	20.80	32.53	53.32	-0.68	54.00	Average
2		2390.000	19.98	32.52	52.50	-1.50	54.00	Average
3		2438.972	76.59	32.39	108.98	N/A	N/A	Average
4		2483.500	19.21	32.40	51.61	-2.39	54.00	Average
5		2485.332	18.77	32.40	51.17	-2.83	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-26
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

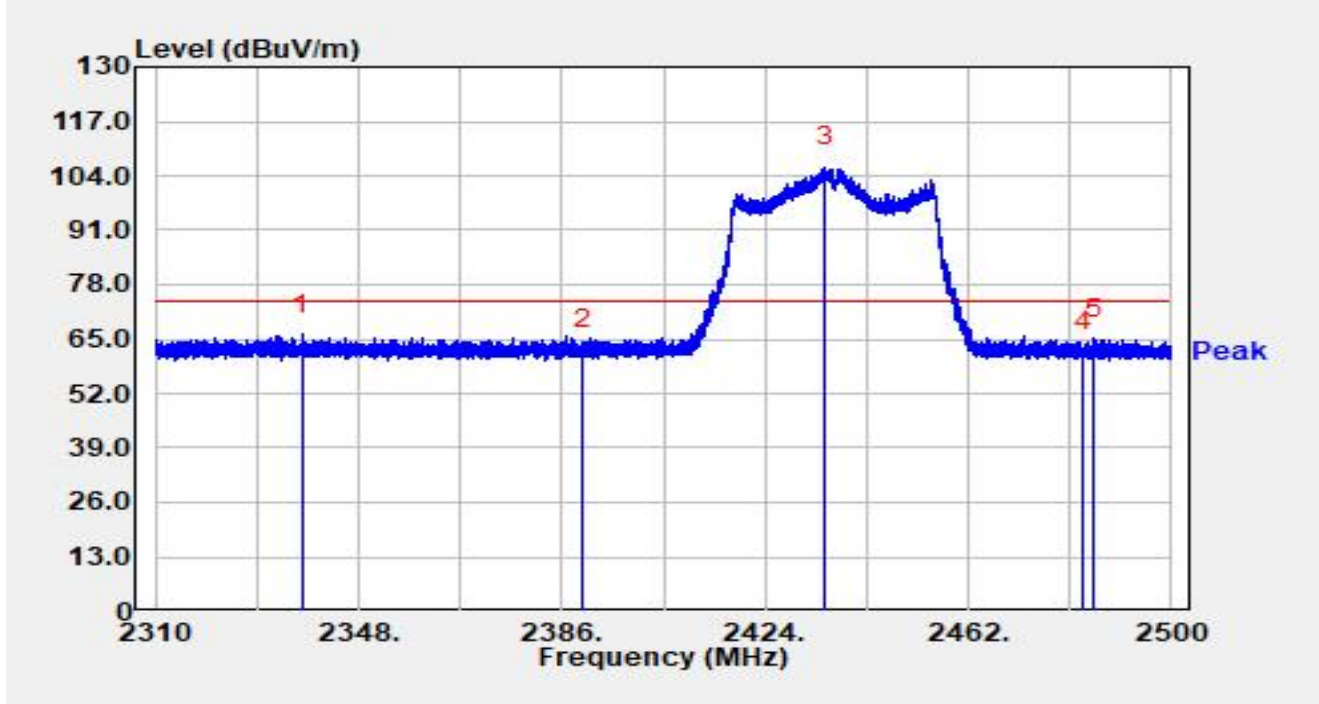


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2337.417	33.45	32.75	66.20	-7.80	74.00	Peak
2		2390.000	30.10	32.52	62.62	-11.38	74.00	Peak
3		2435.305	73.58	32.40	105.98	N/A	N/A	Peak
4		2483.500	29.66	32.40	62.05	-11.95	74.00	Peak
5		2485.522	32.70	32.40	65.09	-8.91	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-26
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

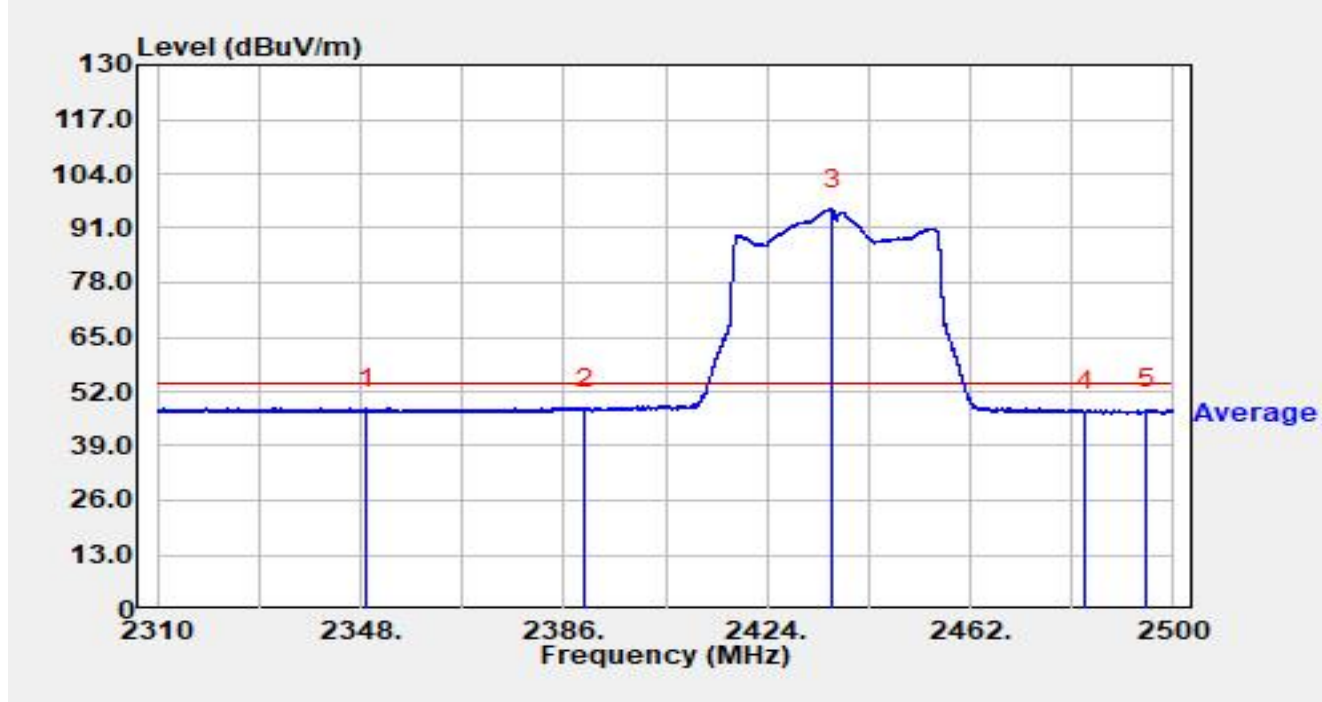


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2349.216	15.31	32.74	48.05	-5.95	54.00	Average
2		2390.000	15.34	32.52	47.86	-6.14	54.00	Average
3		2436.122	63.18	32.39	95.57	N/A	N/A	Average
4		2483.500	14.75	32.40	47.15	-6.85	54.00	Average
5		2494.965	15.23	32.39	47.63	-6.37	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

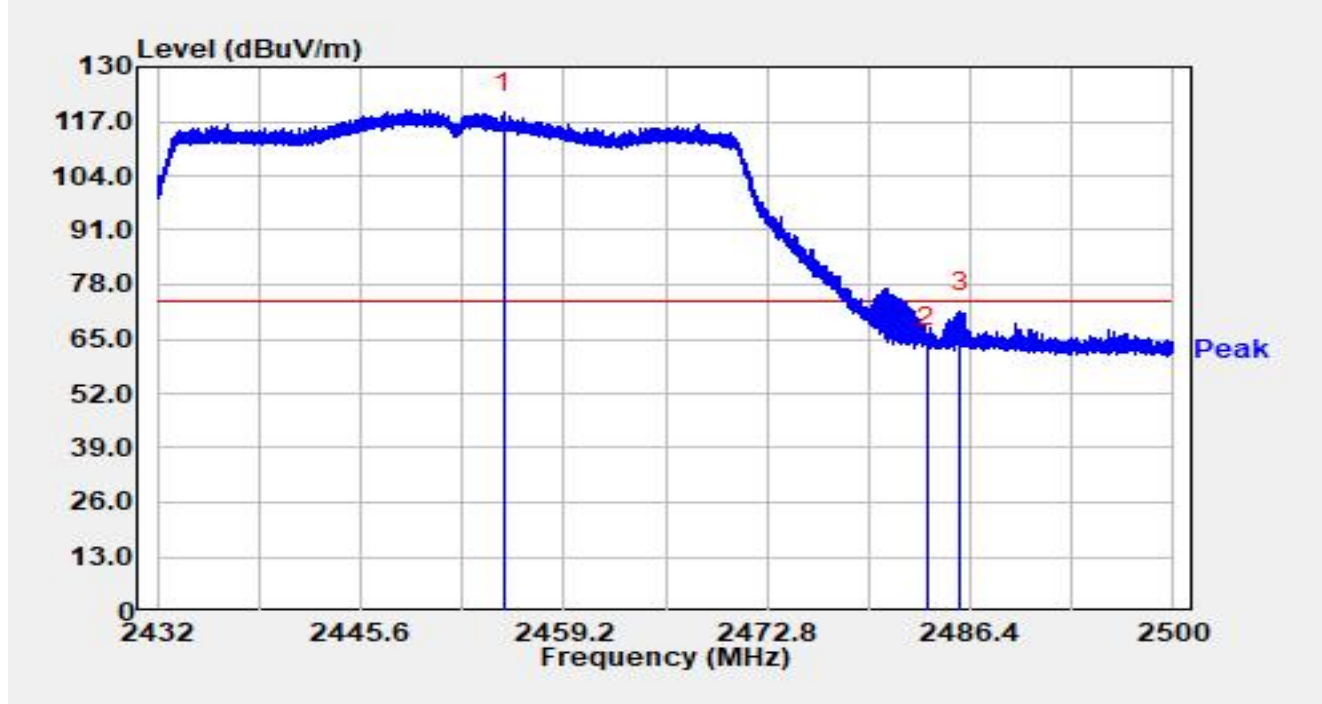


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2455.208	86.76	32.37	119.12	N/A	N/A	Peak
2		2483.500	30.80	32.40	63.20	-10.80	74.00	Peak
3	*	2485.686	39.16	32.40	71.55	-2.45	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

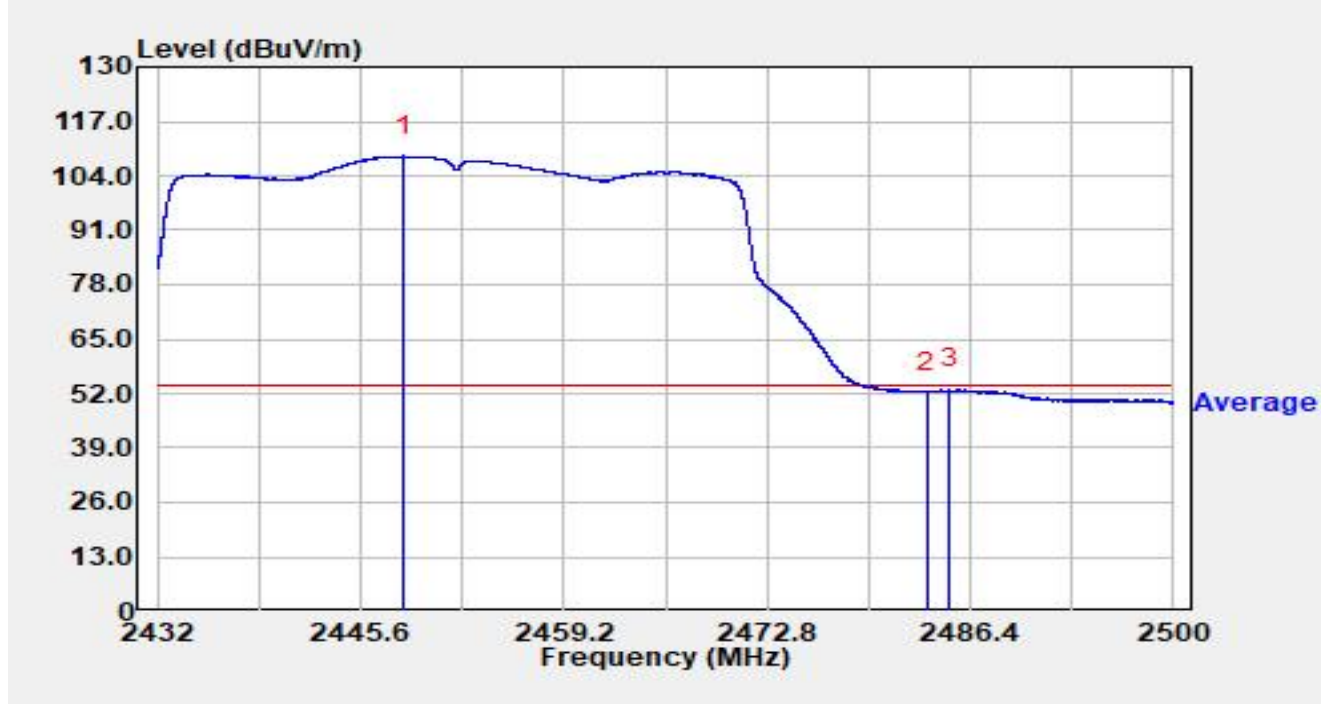


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2448.510	76.29	32.38	108.67	N/A	N/A	Average
2		2483.500	20.05	32.40	52.45	-1.55	54.00	Average
3	*	2484.972	20.67	32.40	53.07	-0.93	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

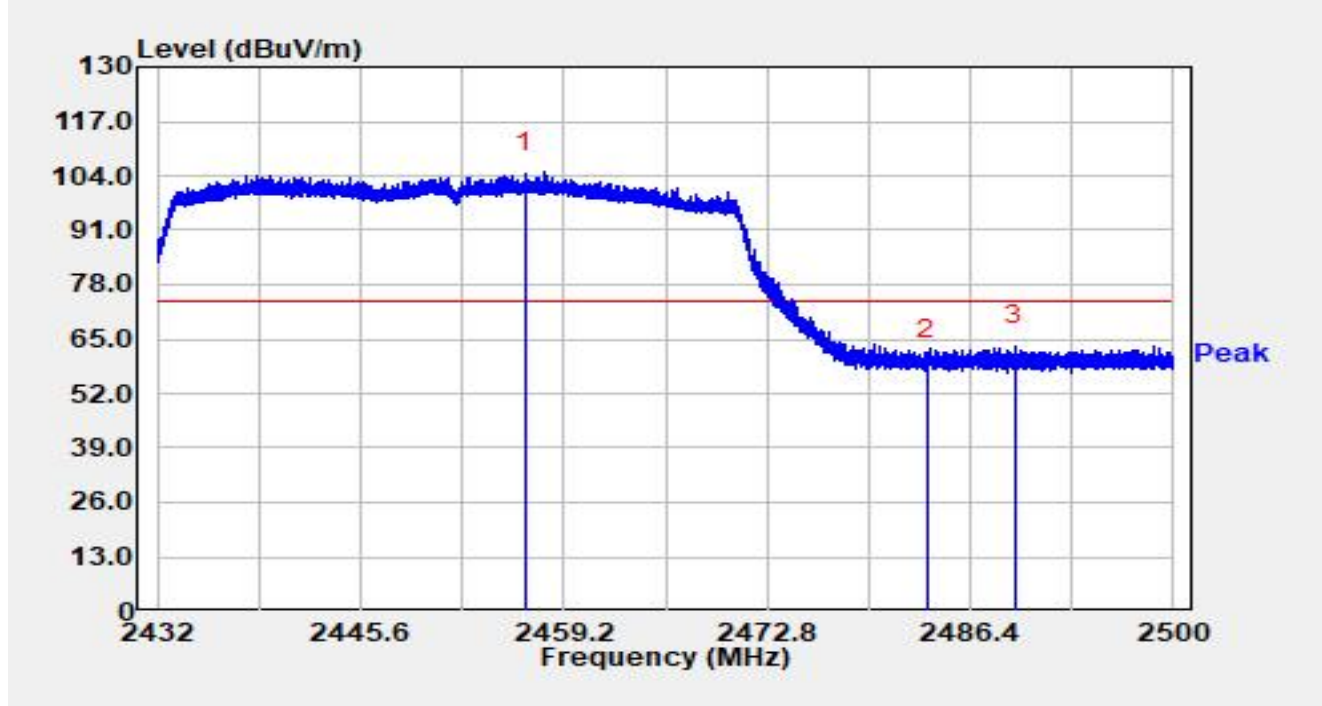


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.596	72.34	32.37	104.70	N/A	N/A	Peak
2		2483.500	27.67	32.40	60.07	-13.93	74.00	Peak
3	*	2489.351	30.92	32.39	63.31	-10.69	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-24
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

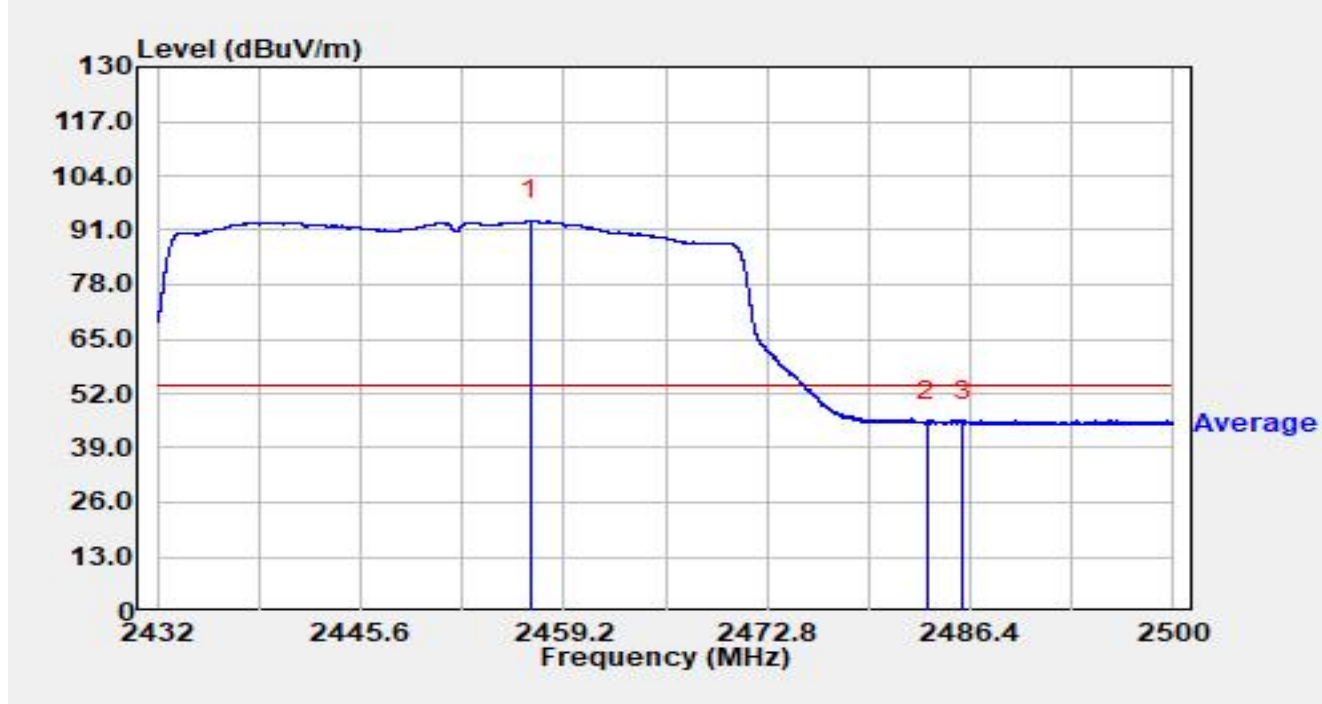


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.997	60.88	32.37	93.25	N/A	N/A	Average
2		2483.500	13.15	32.40	45.55	-8.45	54.00	Average
3	*	2485.951	13.22	32.40	45.61	-8.39	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Vertical Antenna

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

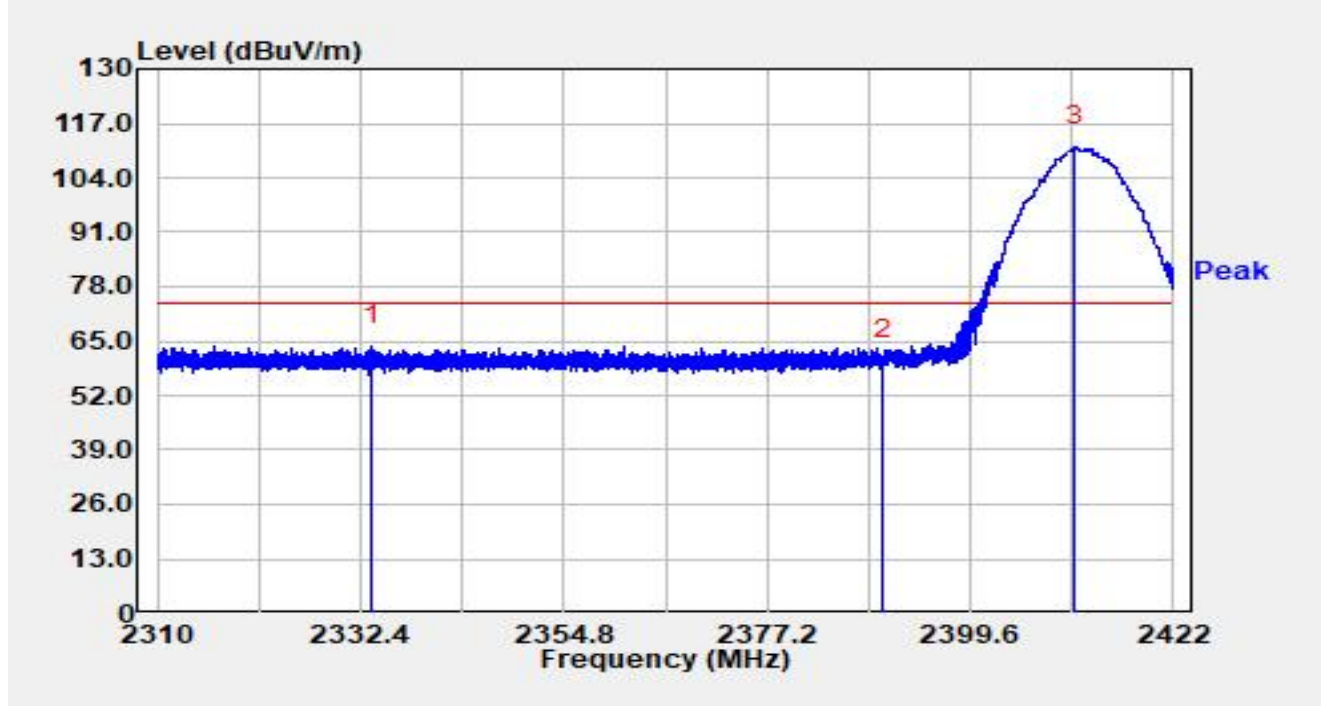


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2333.710	31.11	32.75	63.86	-10.14	74.00	Peak
2		2390.000	28.21	32.52	60.72	-13.28	74.00	Peak
3		2411.080	78.95	32.46	111.41	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

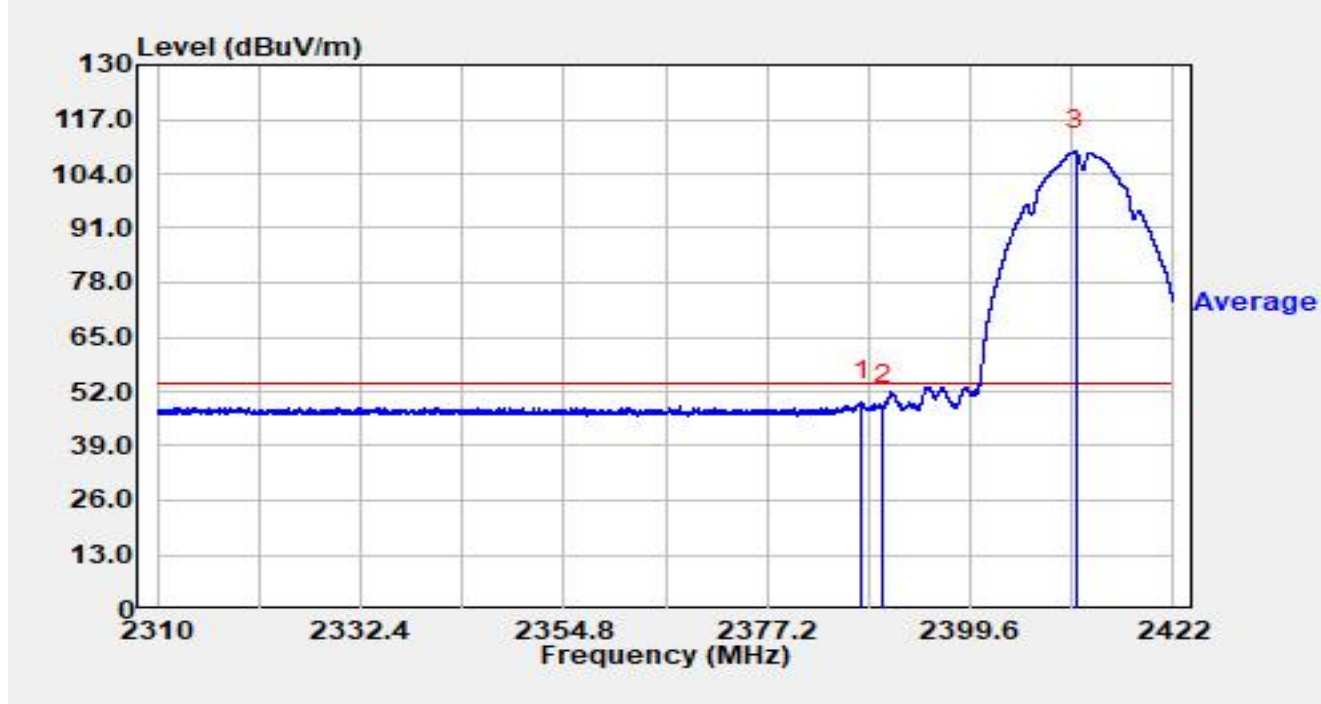


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.616	17.07	32.52	49.60	-4.40	54.00	Average
2		2390.000	16.19	32.52	48.71	-5.29	54.00	Average
3		2411.248	76.97	32.46	109.44	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

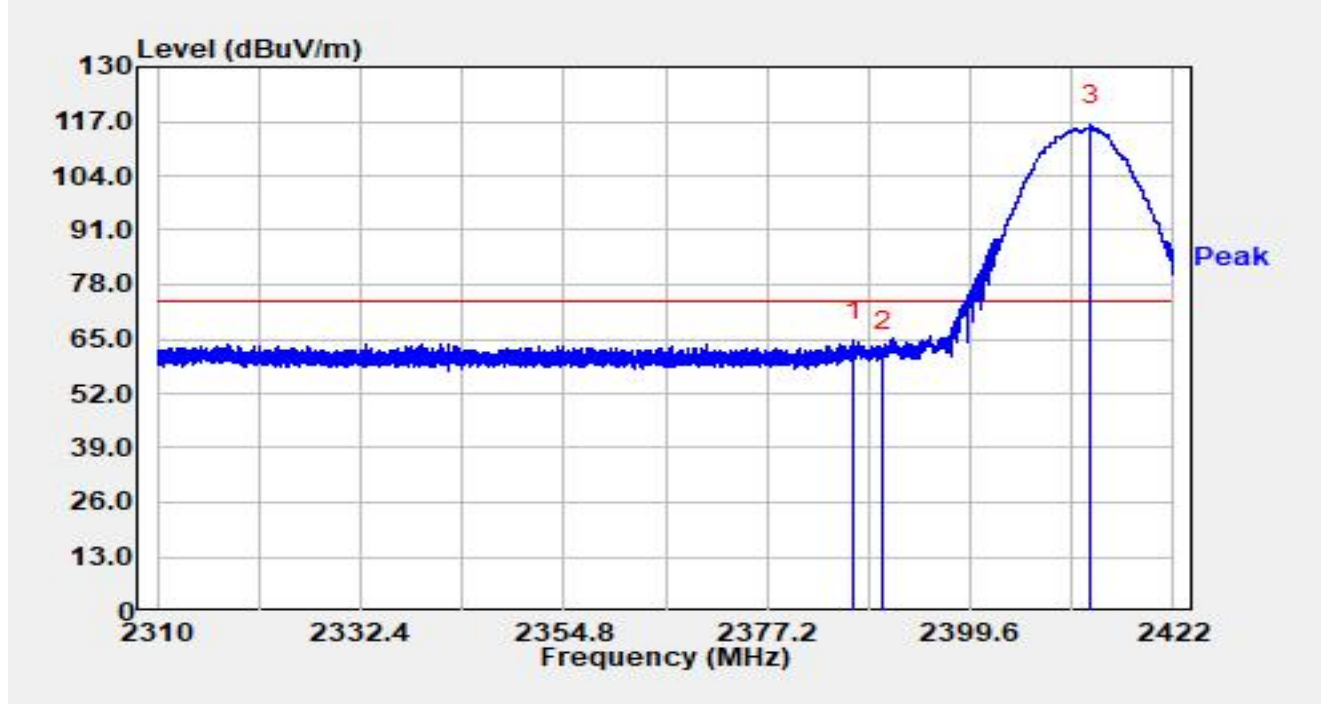


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.731	32.06	32.52	64.58	-9.42	74.00	Peak
2		2390.000	29.39	32.52	61.91	-12.09	74.00	Peak
3		2412.861	83.57	32.46	116.03	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

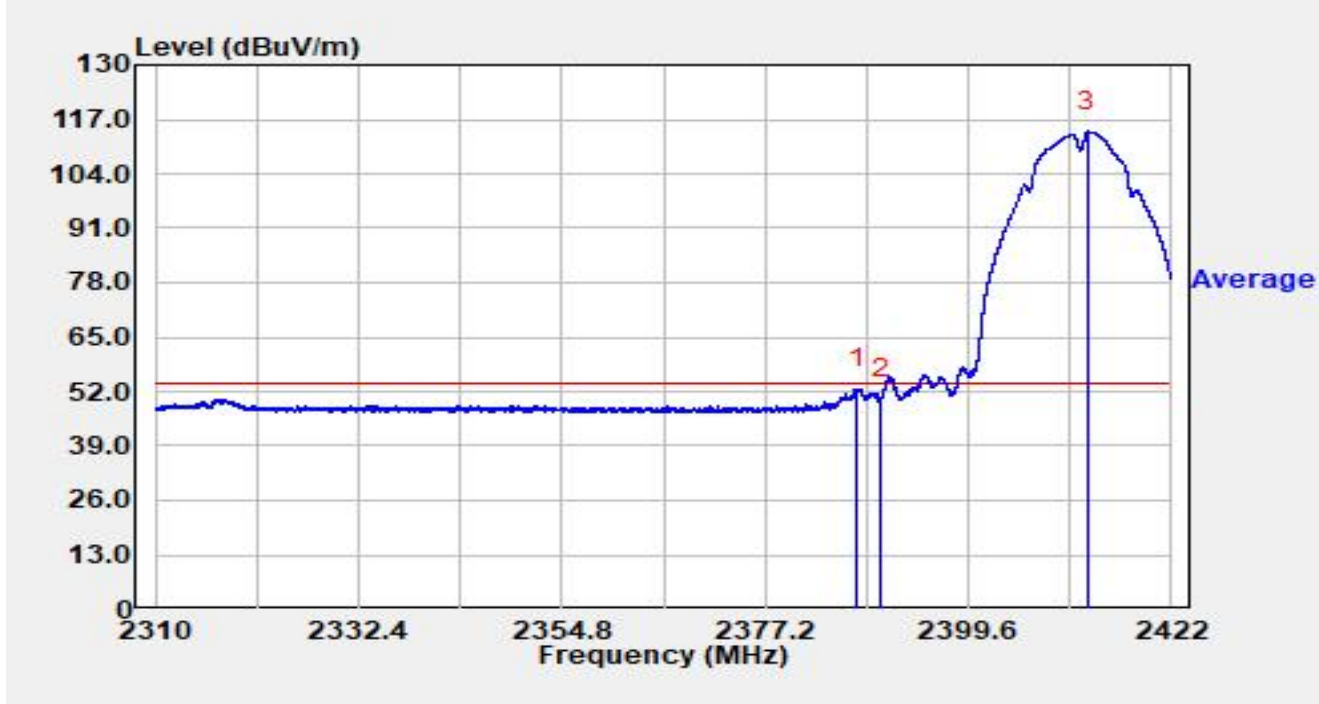


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.358	20.11	32.52	52.63	-1.37	54.00	Average
2		2390.000	17.83	32.52	50.35	-3.65	54.00	Average
3		2412.771	81.62	32.46	114.08	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

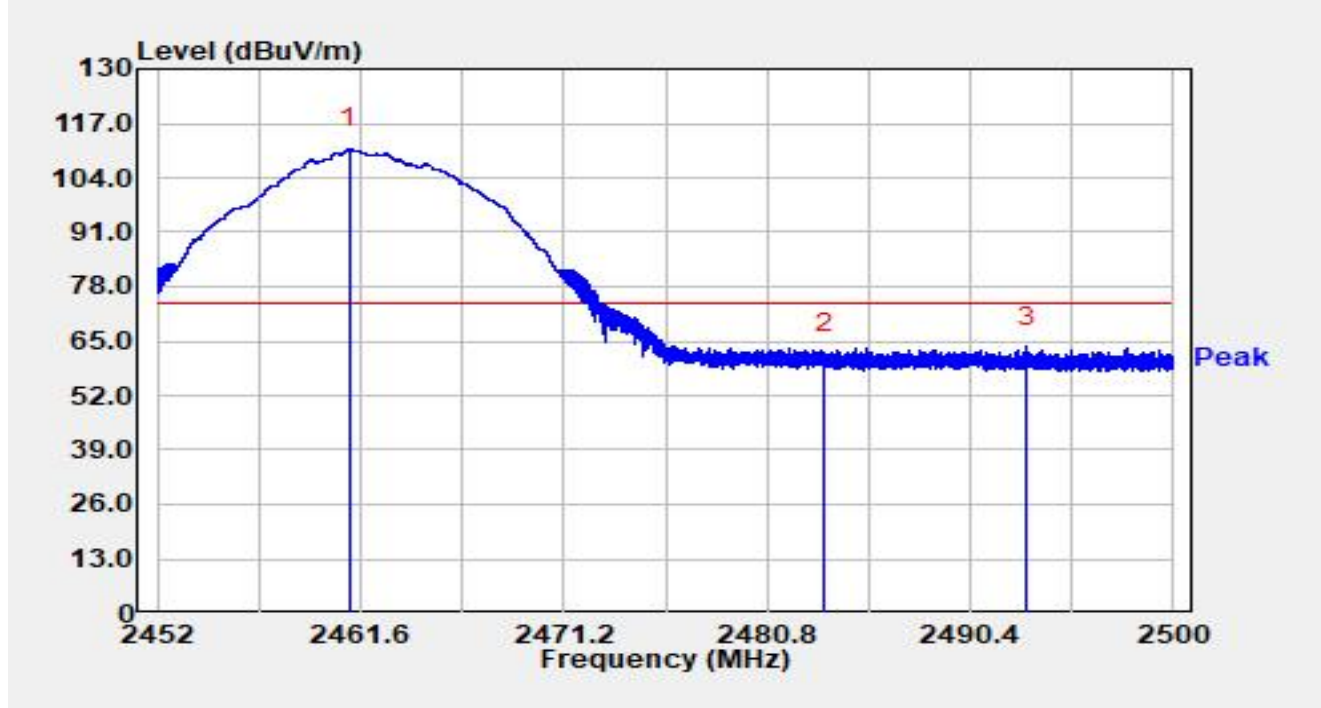


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.077	78.52	32.37	110.89	N/A	N/A	Peak
2		2483.500	29.62	32.40	62.02	-11.98	74.00	Peak
3	*	2493.078	31.32	32.39	63.71	-10.29	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

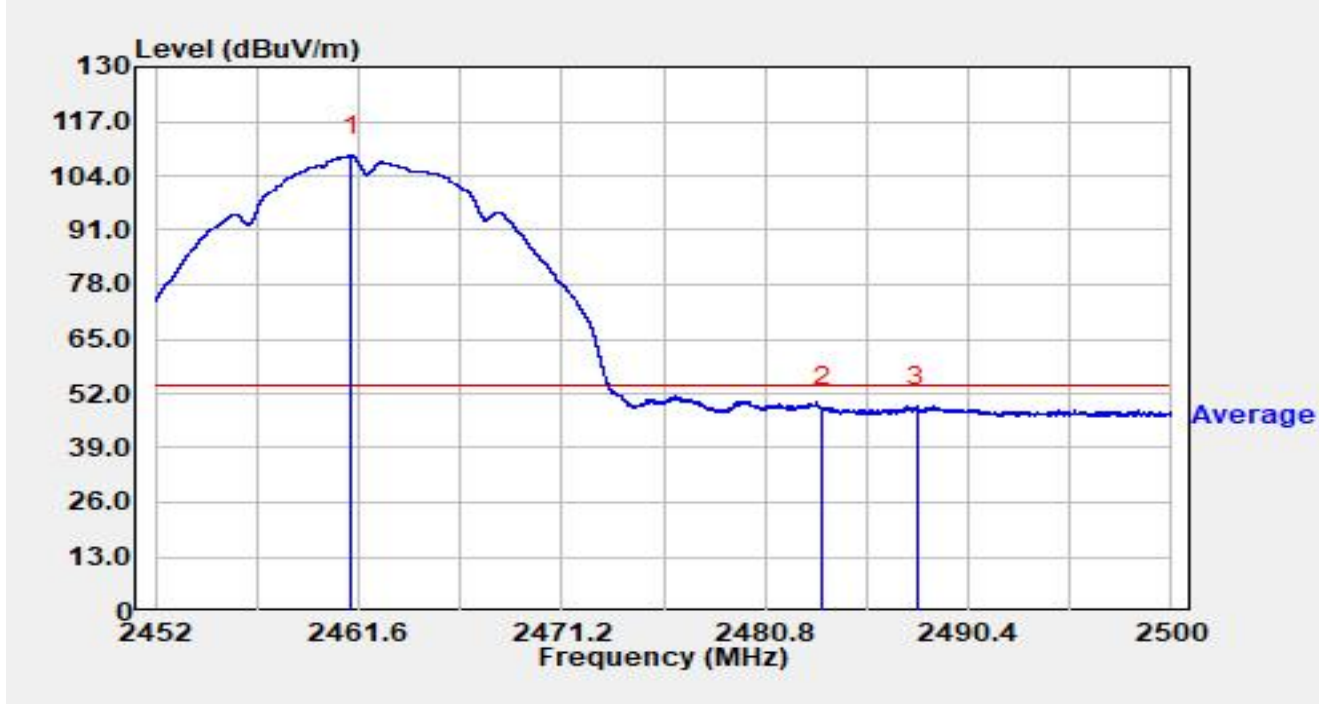


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.245	76.47	32.37	108.84	N/A	N/A	Average
2		2483.500	16.25	32.40	48.65	-5.35	54.00	Average
3	*	2488.005	16.54	32.39	48.93	-5.07	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

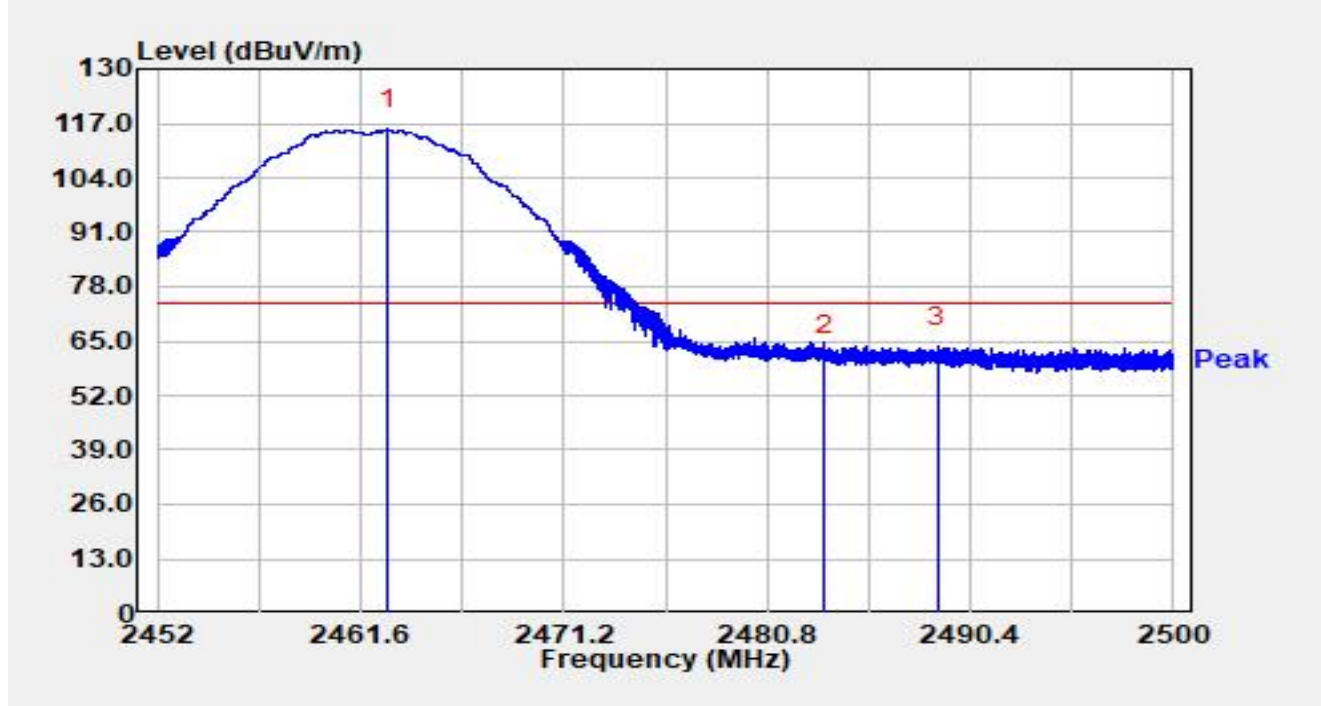


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.872	83.19	32.37	115.57	N/A	N/A	Peak
2		2483.500	29.03	32.40	61.43	-12.57	74.00	Peak
3	*	2488.888	31.36	32.39	63.75	-10.25	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

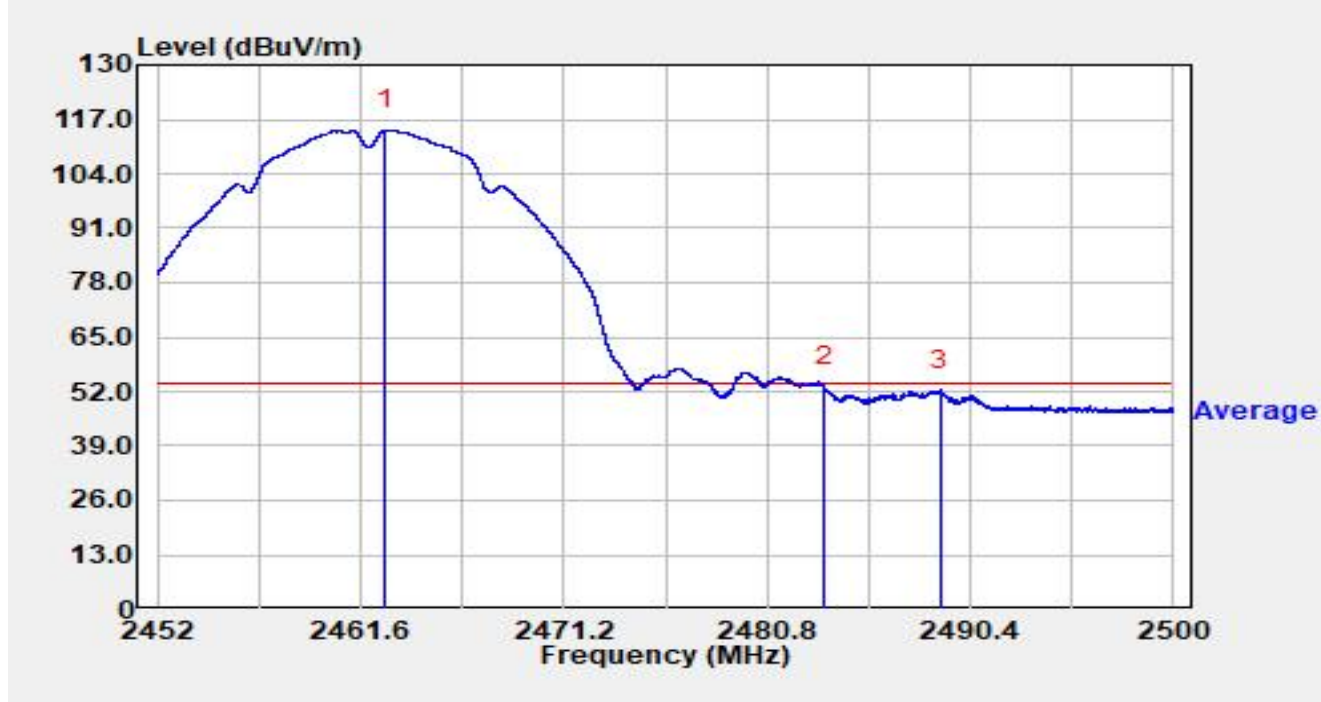


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.747	82.06	32.37	114.44	N/A	N/A	Average
2	*	2483.500	20.71	32.40	53.11	-0.89	54.00	Average
3		2488.989	20.06	32.39	52.45	-1.55	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

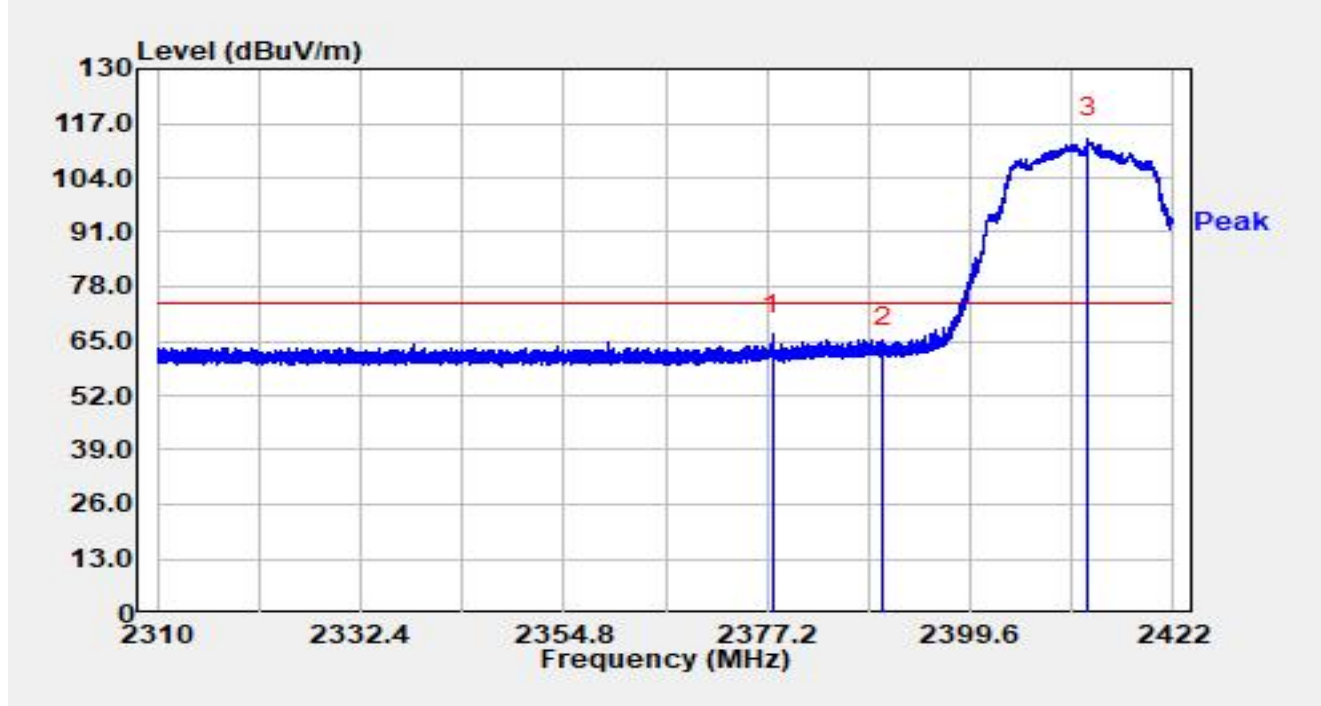


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2377.738	33.97	32.56	66.52	-7.48	74.00	Peak
2		2390.000	31.02	32.52	63.54	-10.46	74.00	Peak
3		2412.536	80.86	32.46	113.32	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

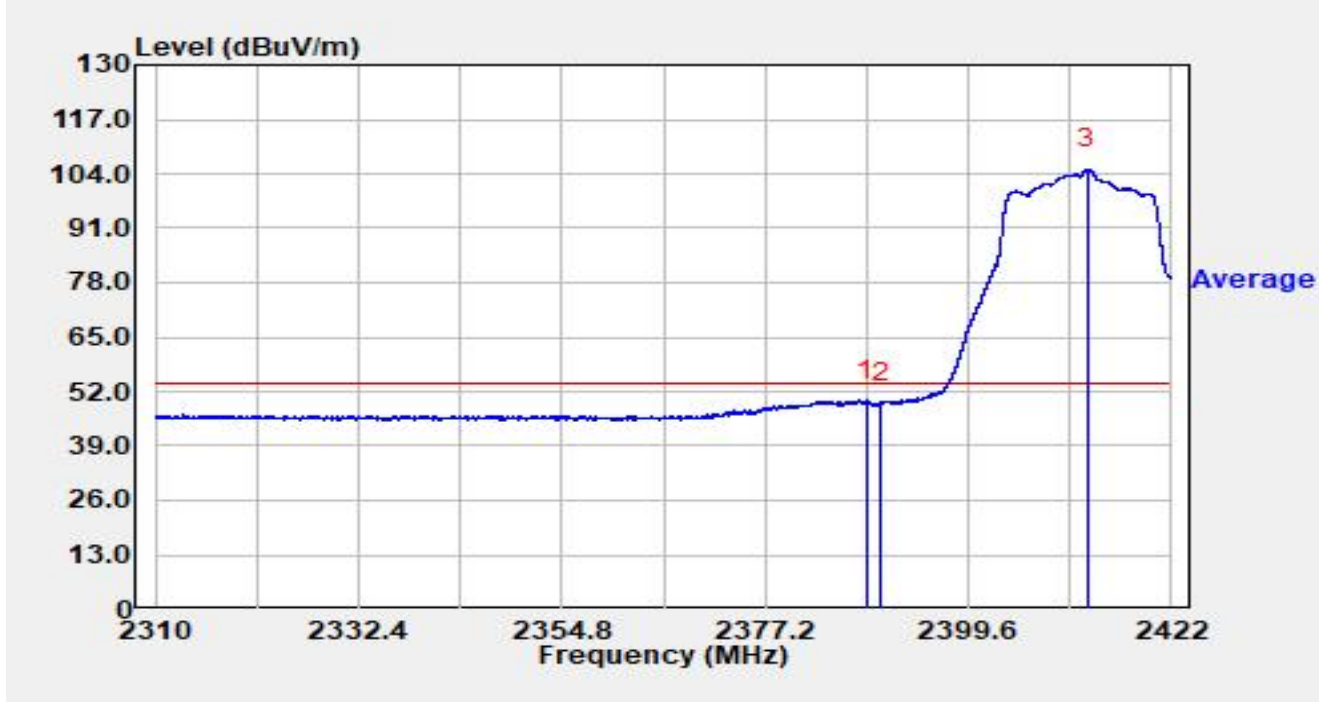


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.389	17.49	32.52	50.01	-3.99	54.00	Average
2		2390.000	16.86	32.52	49.38	-4.62	54.00	Average
3		2412.760	72.62	32.46	105.08	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

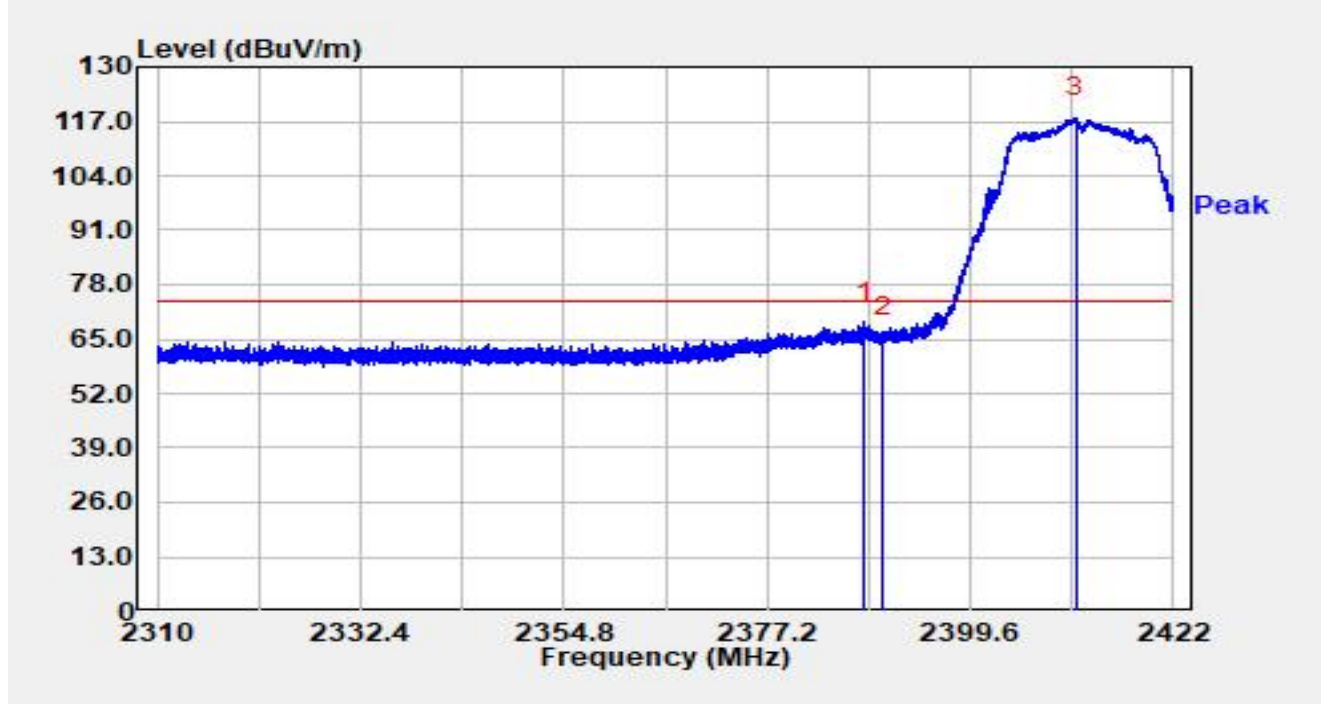


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.896	36.58	32.52	69.10	-4.90	74.00	Peak
2		2390.000	32.88	32.52	65.40	-8.60	74.00	Peak
3		2411.248	85.36	32.46	117.82	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

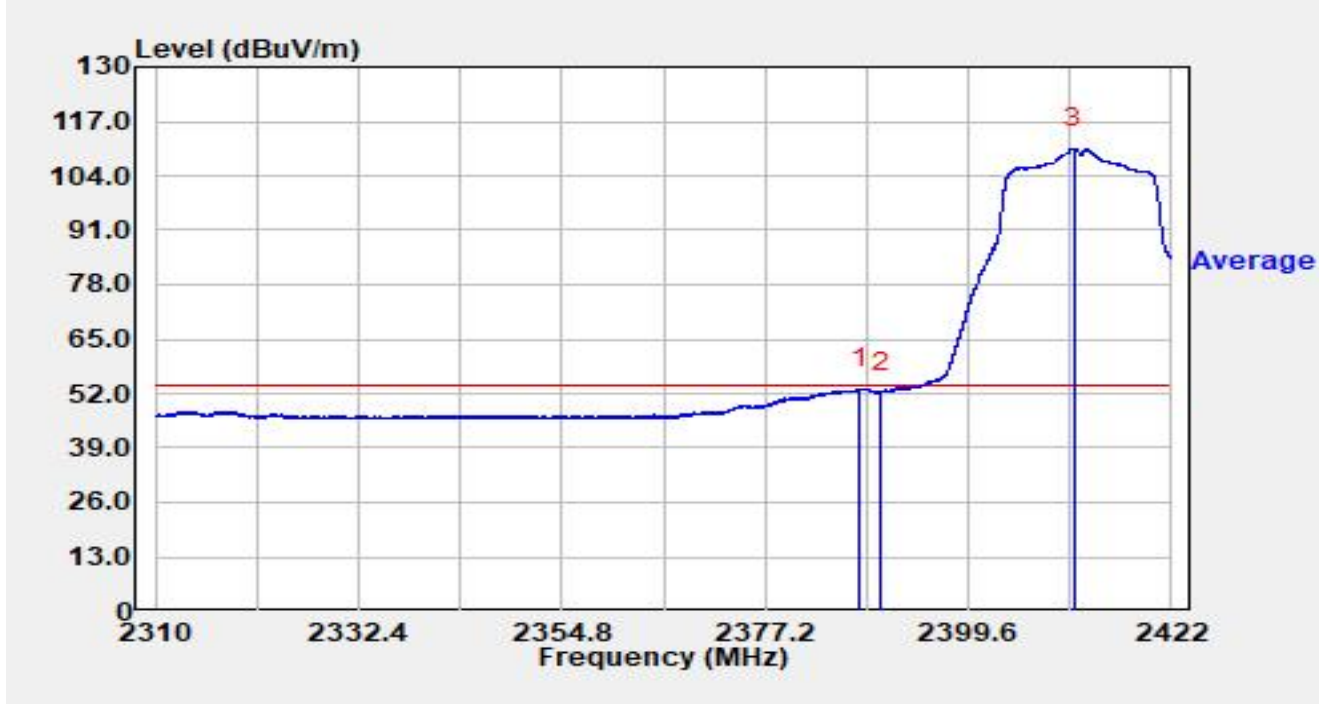


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.672	20.51	32.52	53.03	-0.97	54.00	Average
2		2390.000	19.88	32.52	52.39	-1.61	54.00	Average
3		2411.271	78.14	32.46	110.61	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

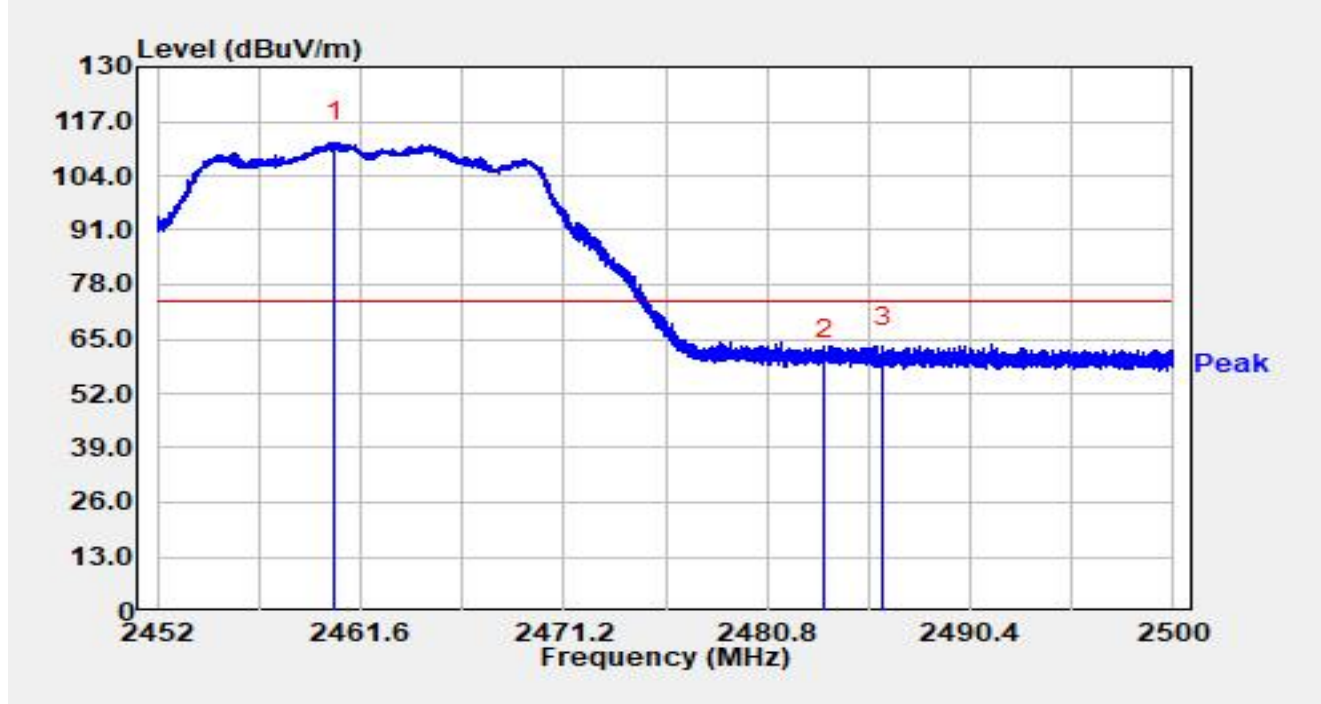


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.405	79.49	32.37	111.86	N/A	N/A	Peak
2		2483.500	27.64	32.40	60.03	-13.97	74.00	Peak
3	*	2486.296	30.84	32.39	63.24	-10.76	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

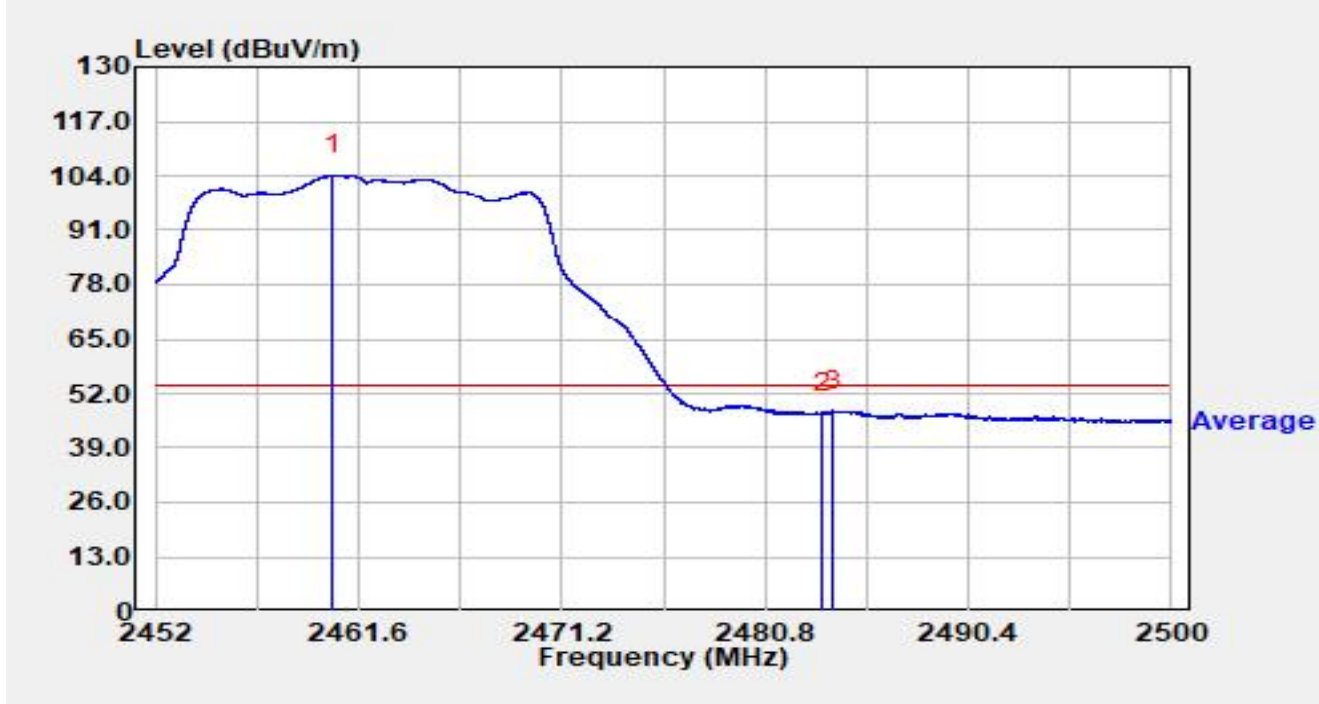


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.390	71.73	32.37	104.10	N/A	N/A	Average
2		2483.500	14.76	32.40	47.15	-6.85	54.00	Average
3	*	2484.002	15.60	32.40	48.00	-6.00	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

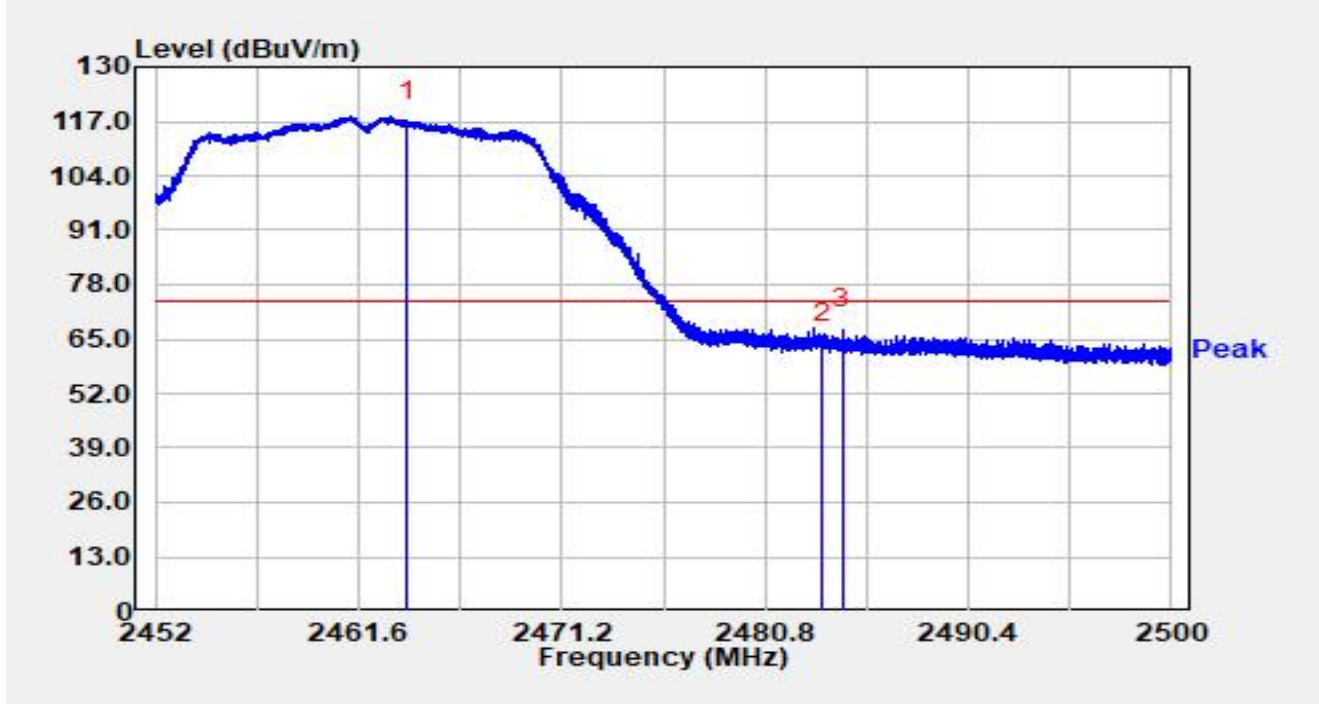


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.904	84.77	32.38	117.15	N/A	N/A	Peak
2		2483.500	31.58	32.40	63.98	-10.02	74.00	Peak
3	*	2484.448	35.03	32.40	67.43	-6.57	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

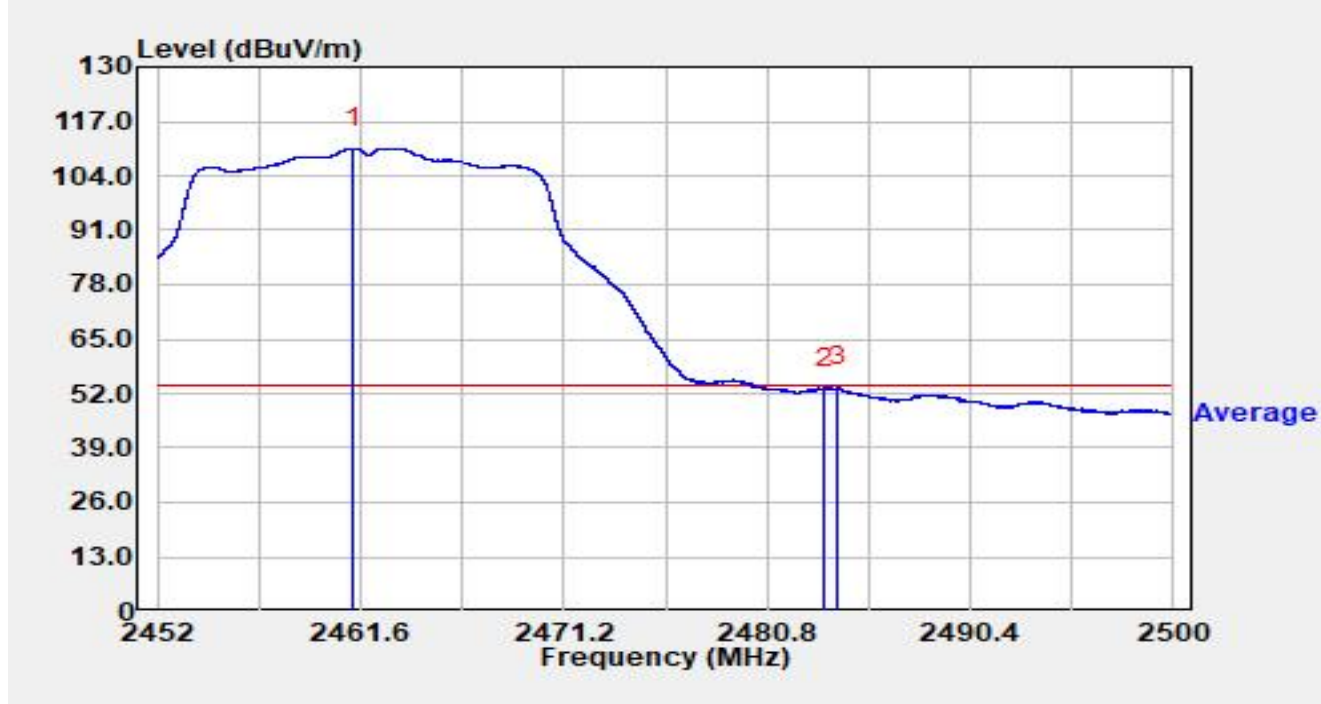


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.254	78.24	32.37	110.61	N/A	N/A	Average
2		2483.500	20.72	32.40	53.12	-0.88	54.00	Average
3	*	2484.170	21.10	32.40	53.49	-0.51	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

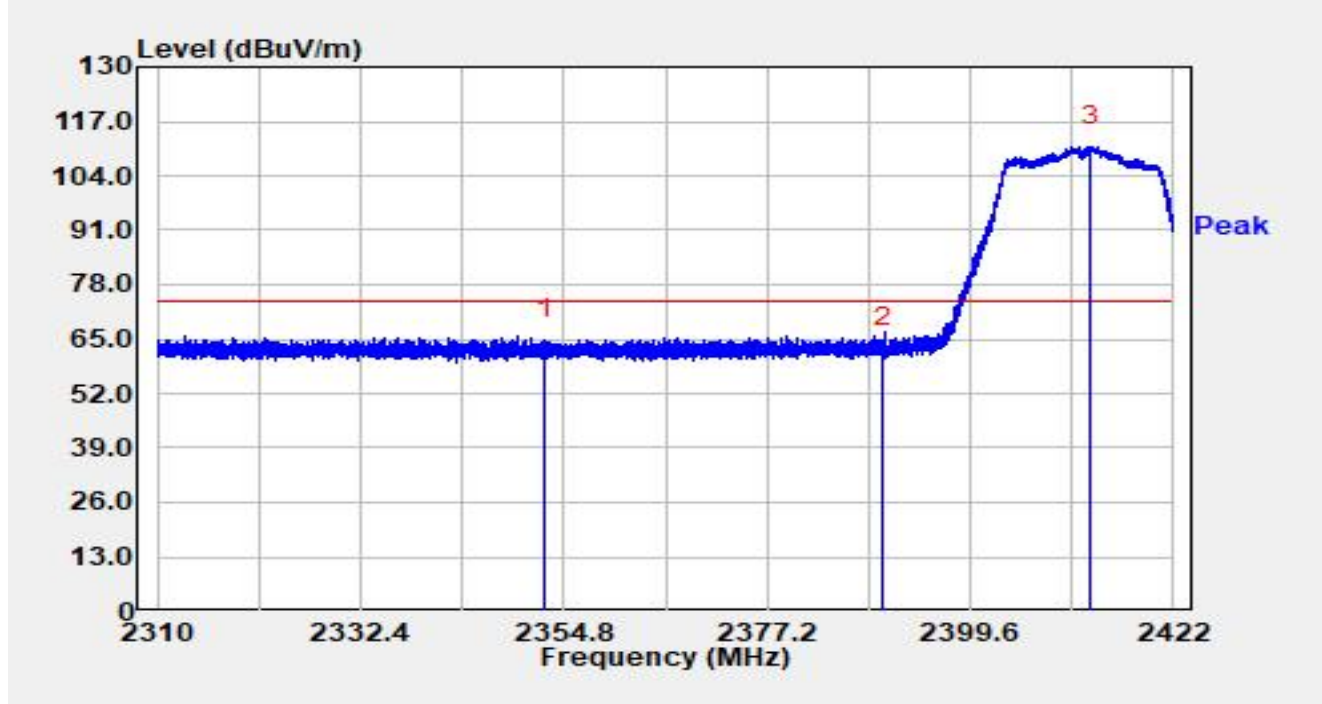


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.784	32.21	32.71	64.93	-9.07	74.00	Peak
2		2390.000	30.43	32.52	62.95	-11.05	74.00	Peak
3		2412.861	78.49	32.46	110.95	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

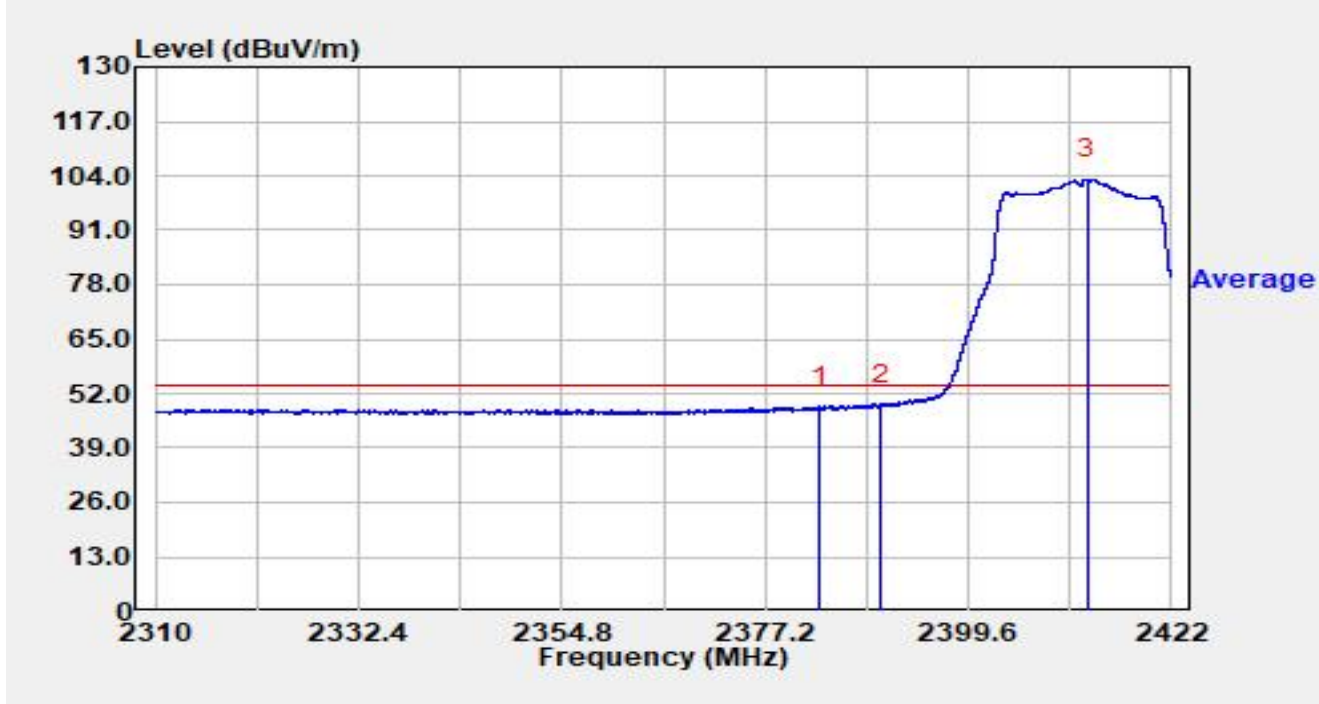


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2383.203	16.48	32.53	49.01	-4.99	54.00	Average
2	*	2390.000	16.56	32.52	49.08	-4.92	54.00	Average
3		2412.670	70.78	32.46	103.24	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

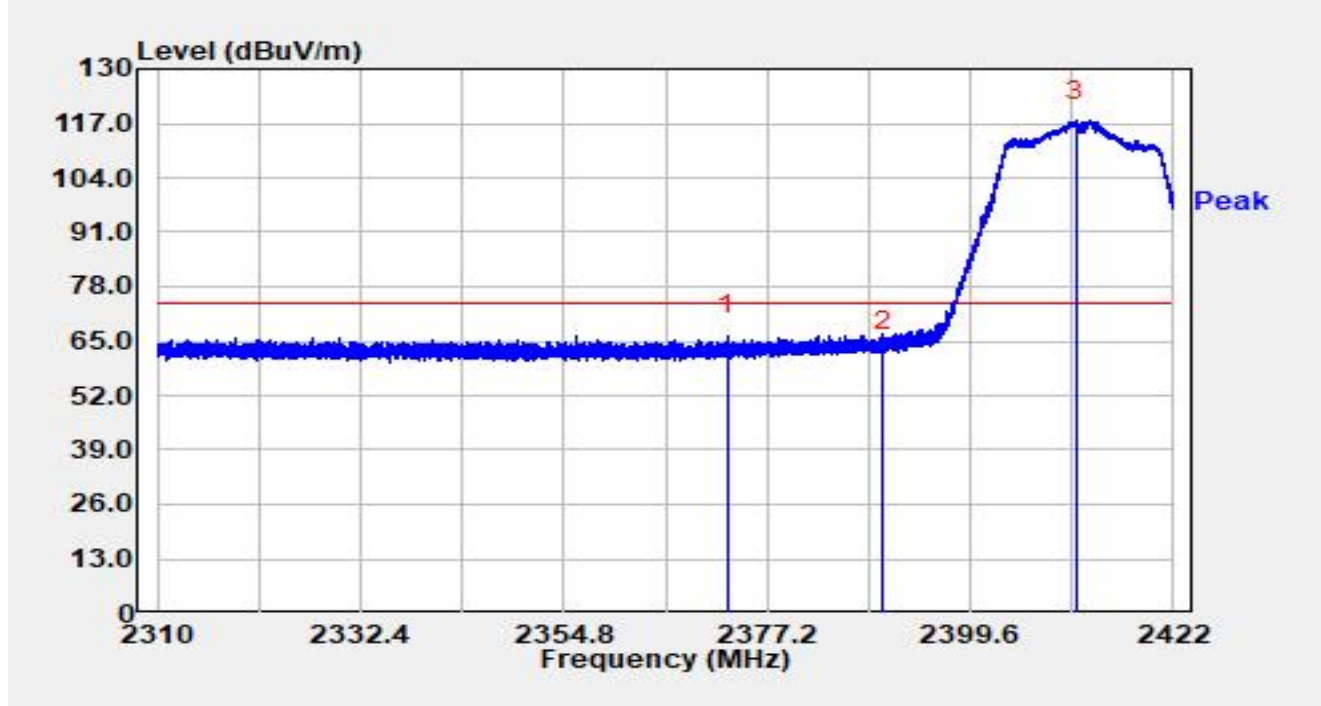


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2372.877	33.74	32.58	66.31	-7.69	74.00	Peak
2		2390.000	29.97	32.52	62.48	-11.52	74.00	Peak
3		2411.214	85.19	32.46	117.66	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

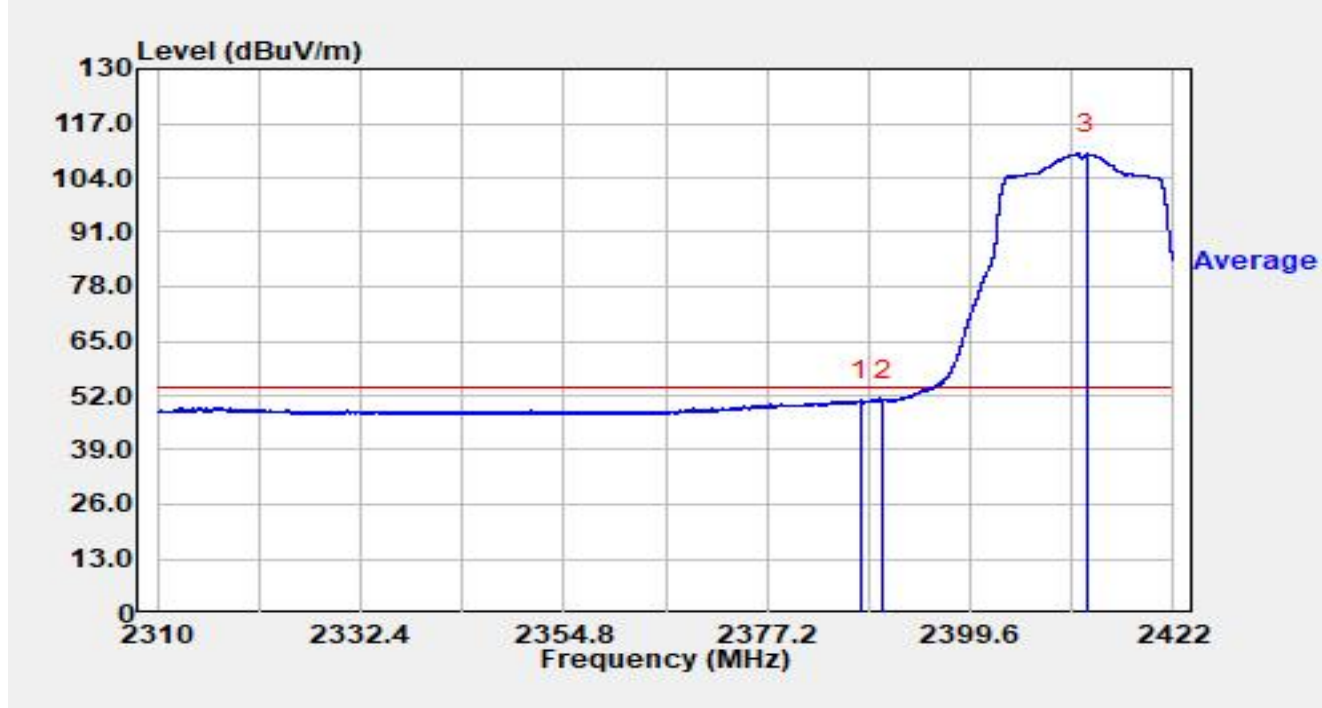


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.459	18.31	32.52	50.84	-3.16	54.00	Average
2		2390.000	18.28	32.52	50.80	-3.20	54.00	Average
3		2412.480	77.42	32.46	109.88	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2437MHz		

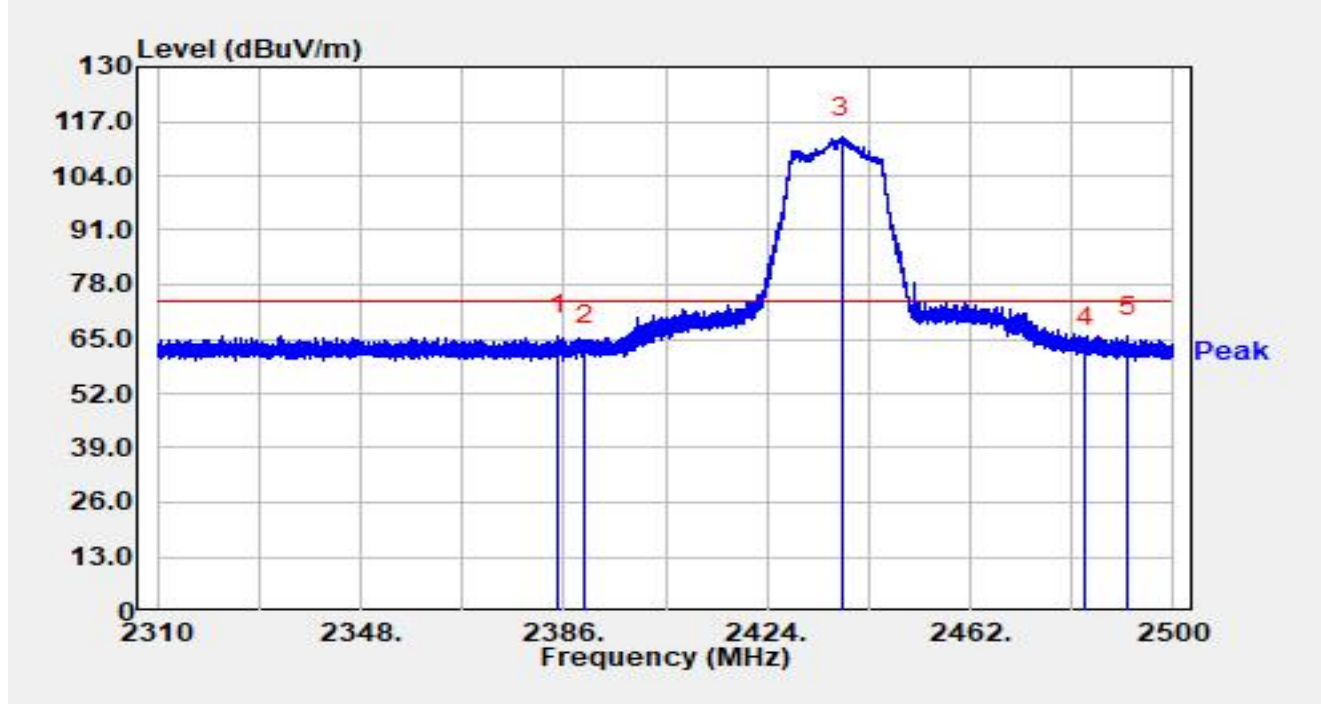


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.974	33.24	32.53	65.76	-8.24	74.00	Peak
2		2390.000	30.91	32.52	63.42	-10.58	74.00	Peak
3		2437.851	80.71	32.39	113.10	N/A	N/A	Peak
4		2483.500	30.40	32.40	62.79	-11.21	74.00	Peak
5		2491.545	33.13	32.39	65.51	-8.49	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2437MHz		

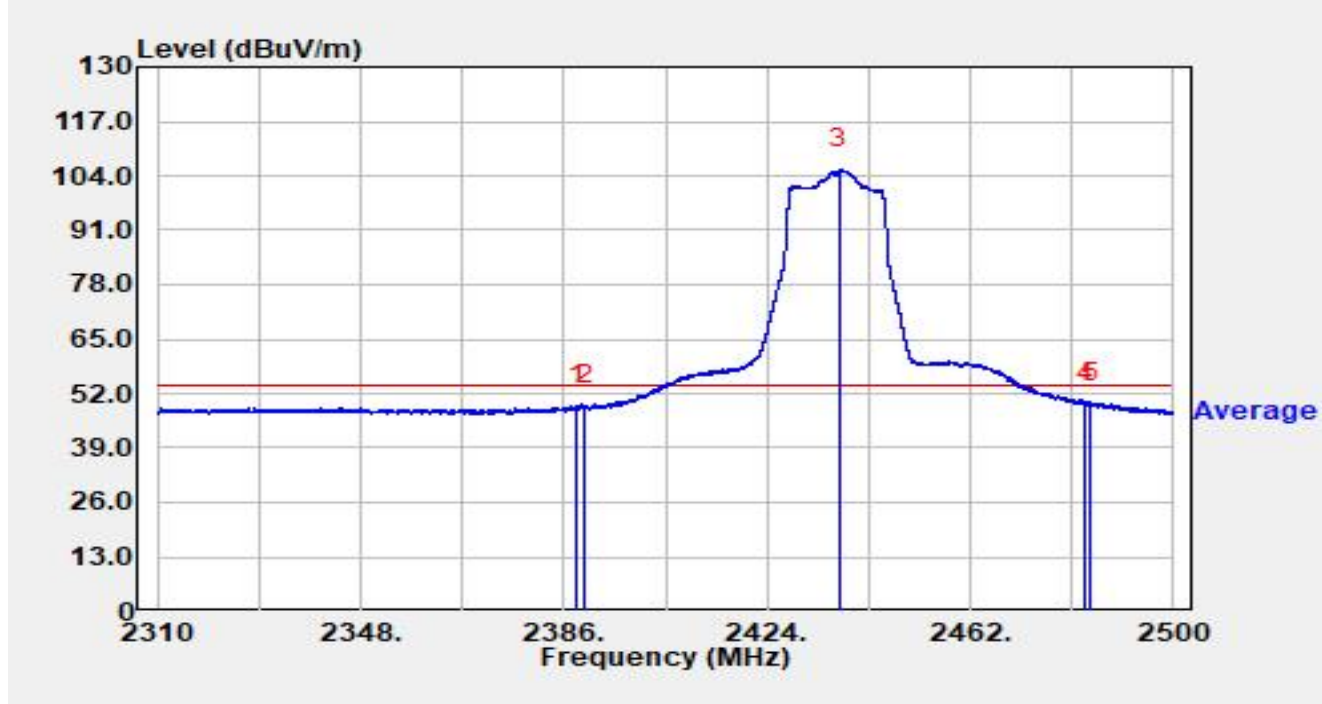


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.451	16.66	32.52	49.18	-4.82	54.00	Average
2		2390.000	16.78	32.52	49.30	-4.70	54.00	Average
3		2437.566	73.25	32.39	105.64	N/A	N/A	Average
4		2483.500	17.17	32.40	49.57	-4.43	54.00	Average
5	*	2484.496	17.31	32.40	49.71	-4.29	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2437MHz		

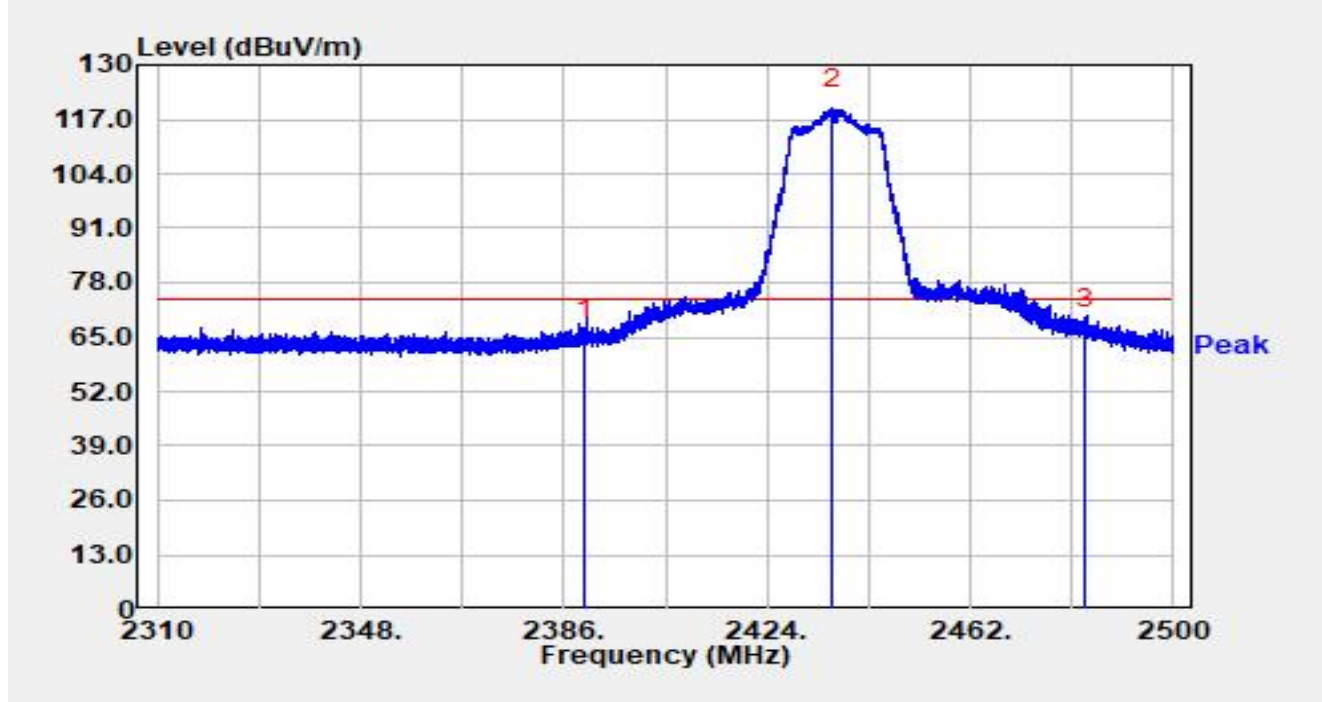


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2390.000	32.04	32.52	64.56	-9.44	74.00	Peak
2		2436.179	87.27	32.39	119.66	N/A	N/A	Peak
3	*	2483.500	34.66	32.40	67.06	-6.94	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2437MHz		

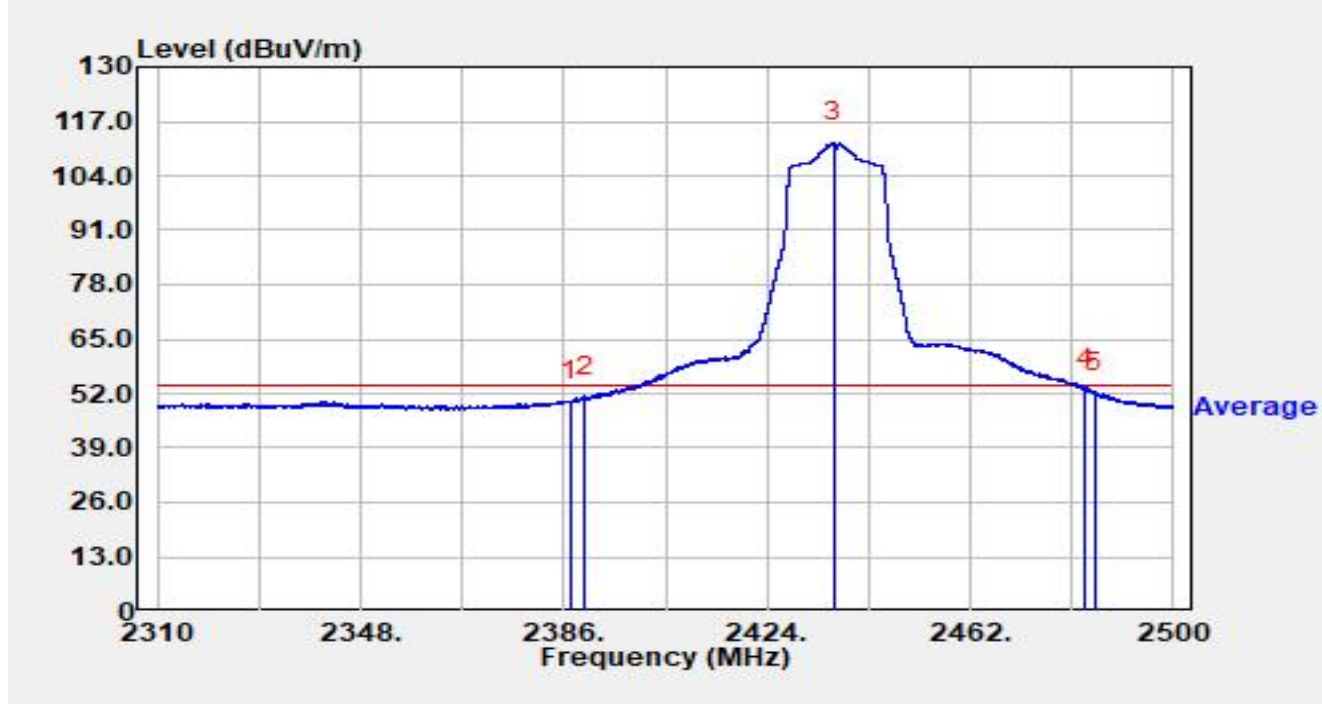


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2387.330	17.73	32.52	50.25	-3.75	54.00	Average
2		2390.000	18.59	32.52	51.11	-2.89	54.00	Average
3		2436.369	79.60	32.39	111.99	N/A	N/A	Average
4	*	2483.500	20.82	32.40	53.22	-0.78	54.00	Average
5		2485.256	20.01	32.40	52.41	-1.59	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

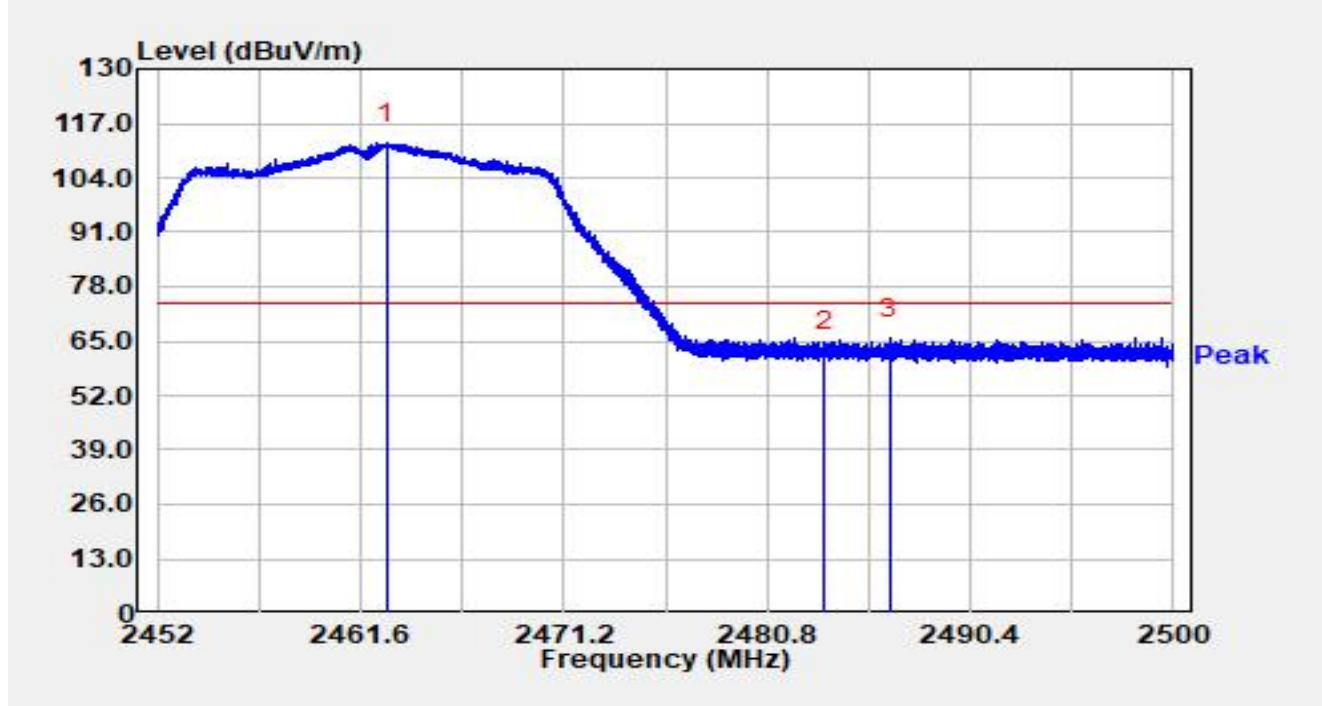


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.858	79.82	32.37	112.20	N/A	N/A	Peak
2		2483.500	30.23	32.40	62.63	-11.37	74.00	Peak
3	*	2486.622	33.23	32.39	65.63	-8.37	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

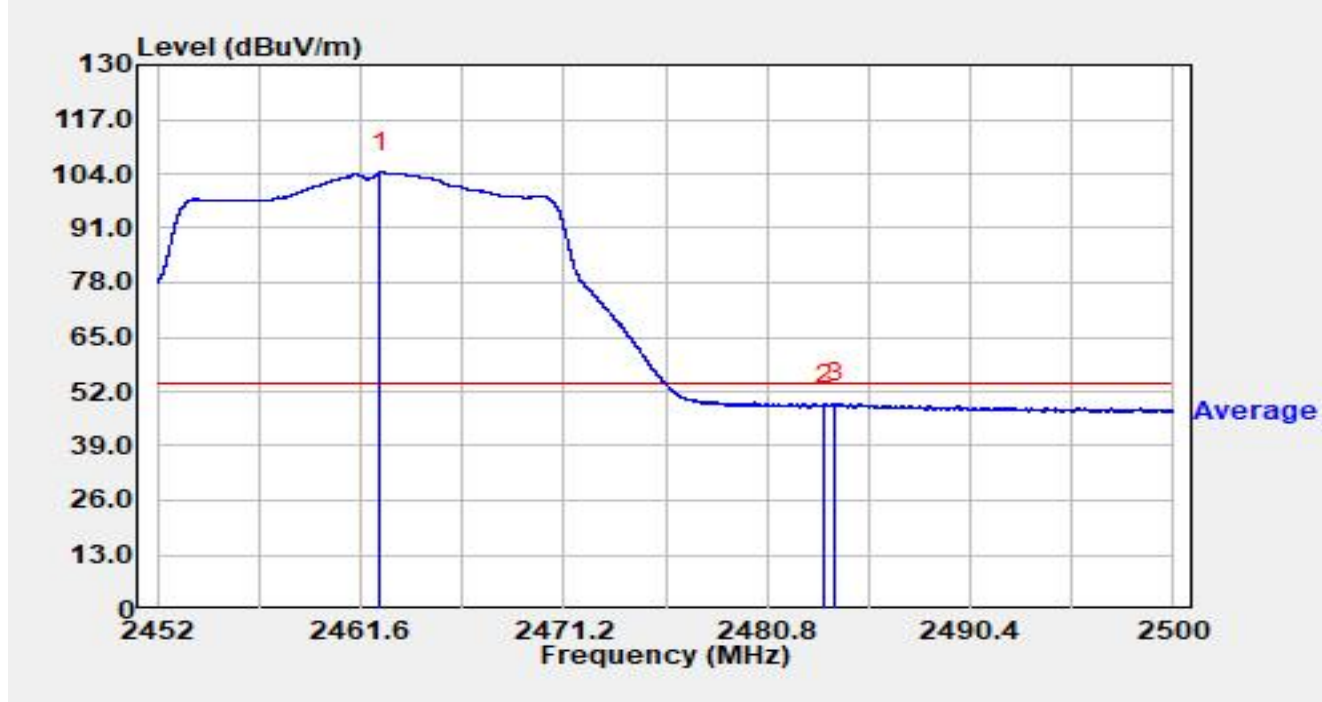


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.541	72.05	32.37	104.42	N/A	N/A	Average
2		2483.500	16.21	32.40	48.61	-5.39	54.00	Average
3	*	2484.035	16.75	32.40	49.14	-4.86	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

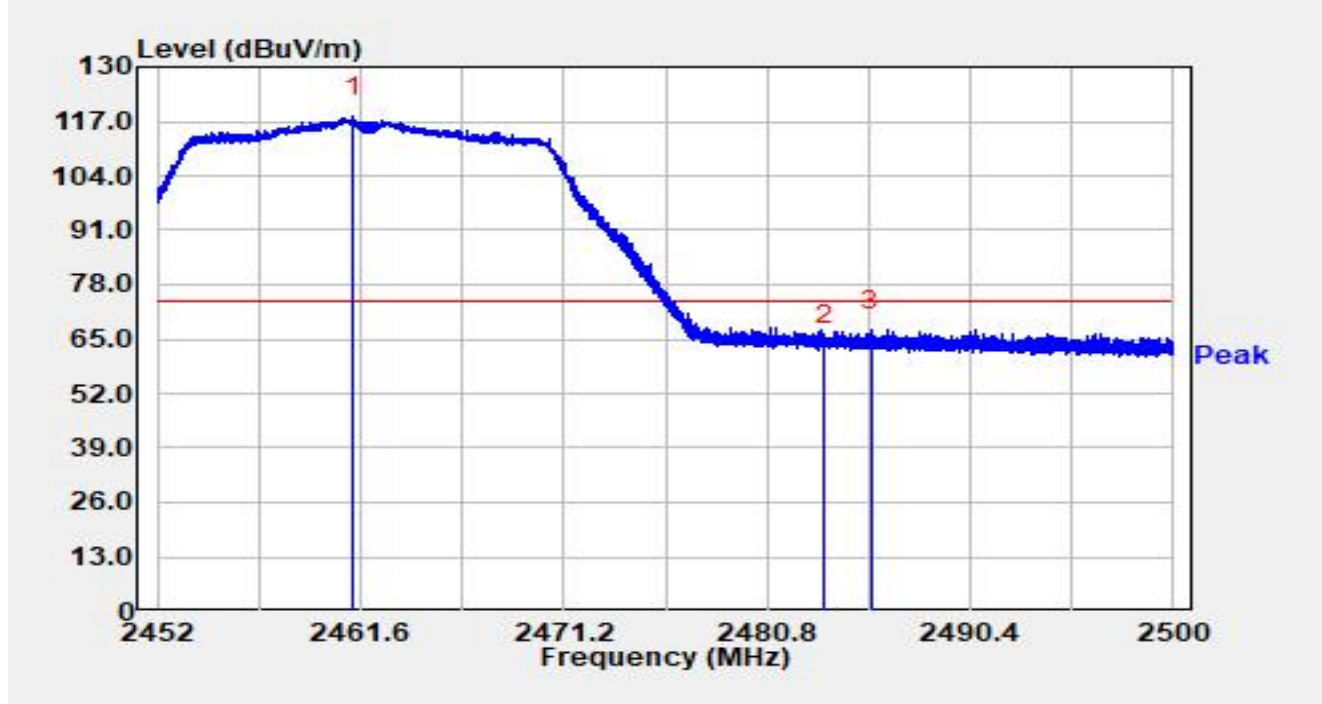


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.269	85.67	32.37	118.04	N/A	N/A	Peak
2		2483.500	31.36	32.40	63.76	-10.24	74.00	Peak
3	*	2485.706	34.73	32.40	67.13	-6.87	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

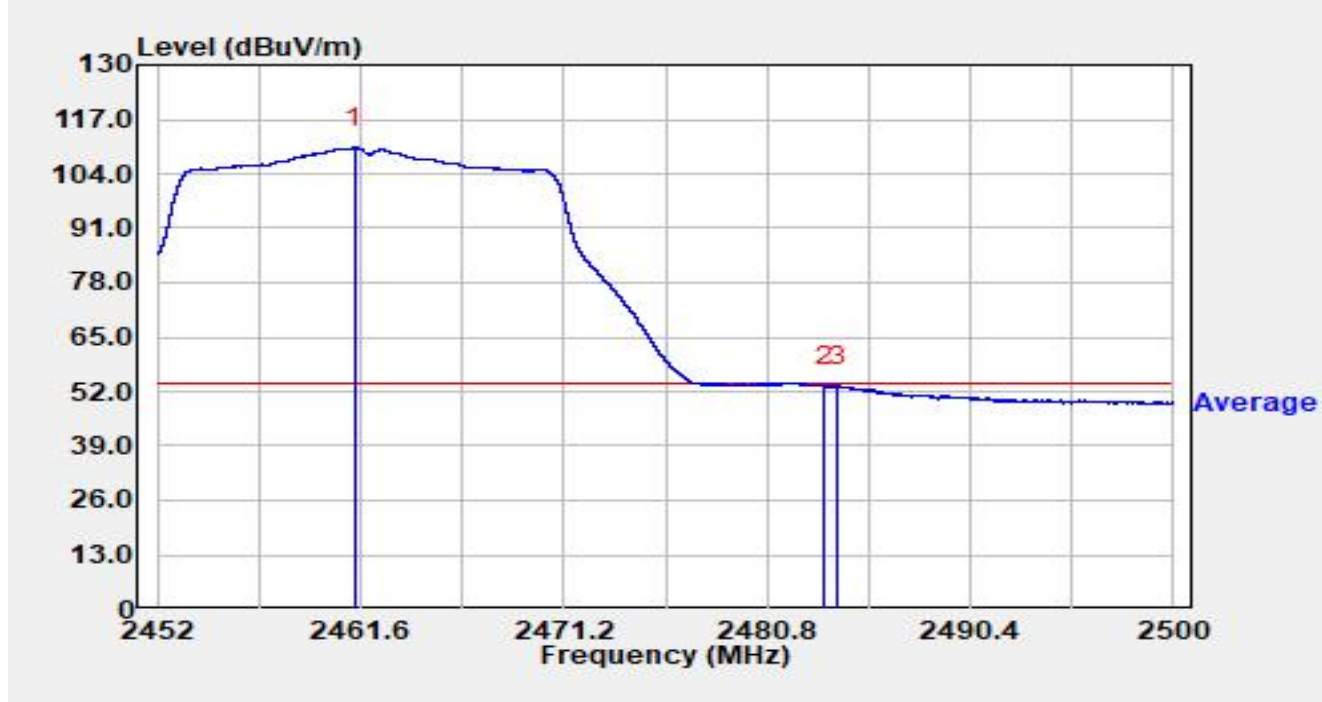


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.298	77.80	32.37	110.17	N/A	N/A	Average
2	*	2483.500	20.93	32.40	53.33	-0.67	54.00	Average
3		2484.141	20.93	32.40	53.33	-0.67	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

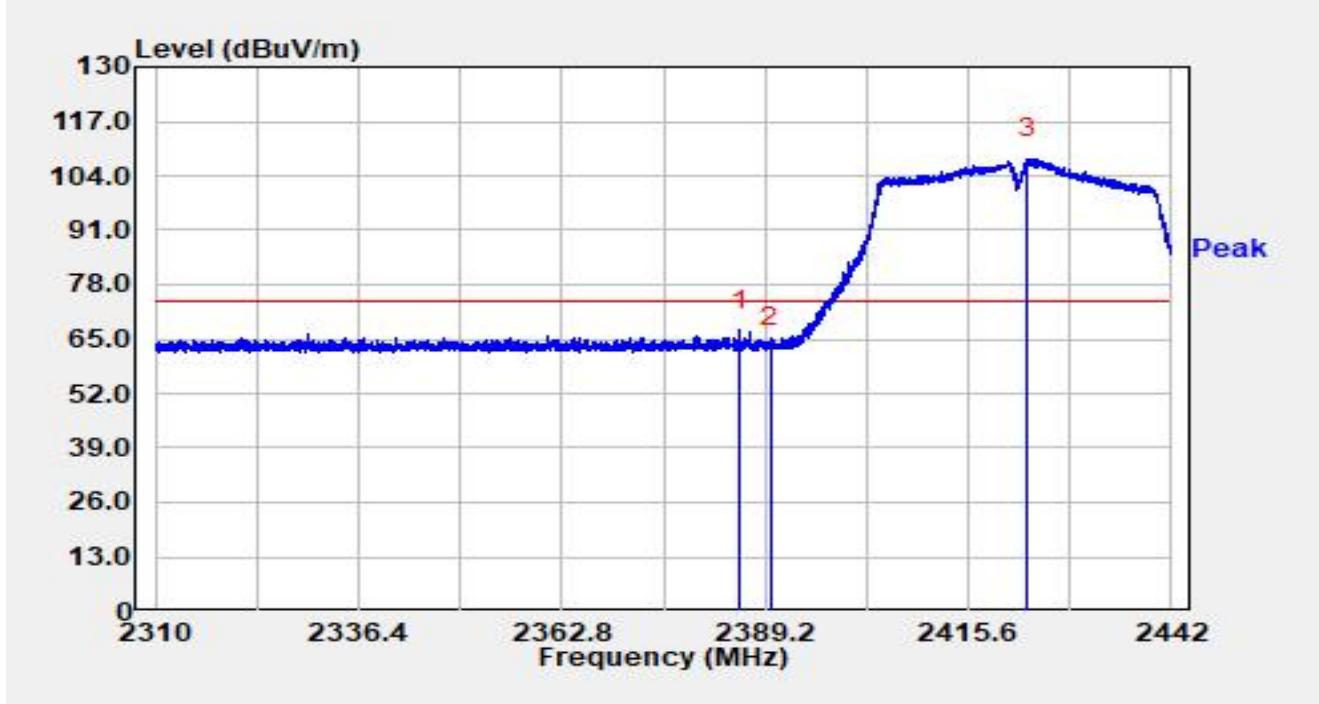


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.874	34.49	32.53	67.02	-6.98	74.00	Peak
2		2390.000	30.38	32.52	62.90	-11.10	74.00	Peak
3		2423.309	75.52	32.43	107.96	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

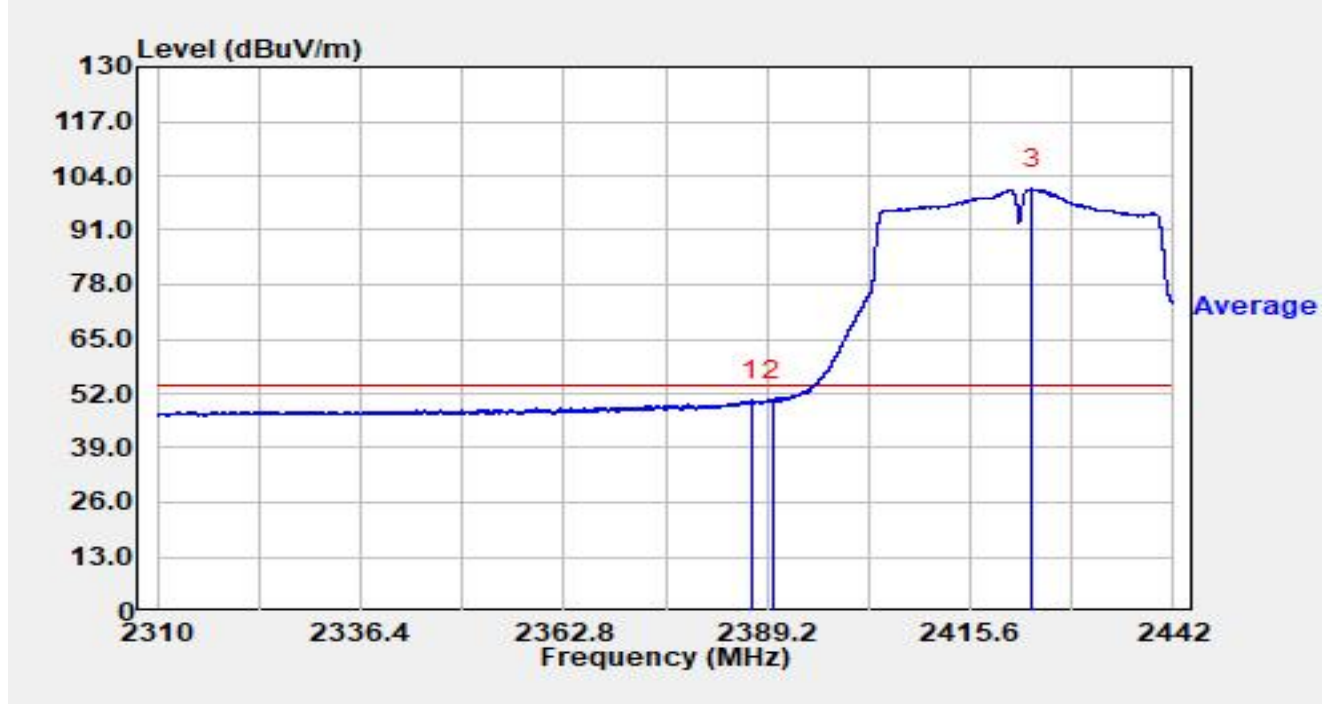


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2387.141	17.76	32.52	50.28	-3.72	54.00	Average
2	*	2390.000	17.87	32.52	50.39	-3.61	54.00	Average
3		2423.599	68.44	32.43	100.87	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

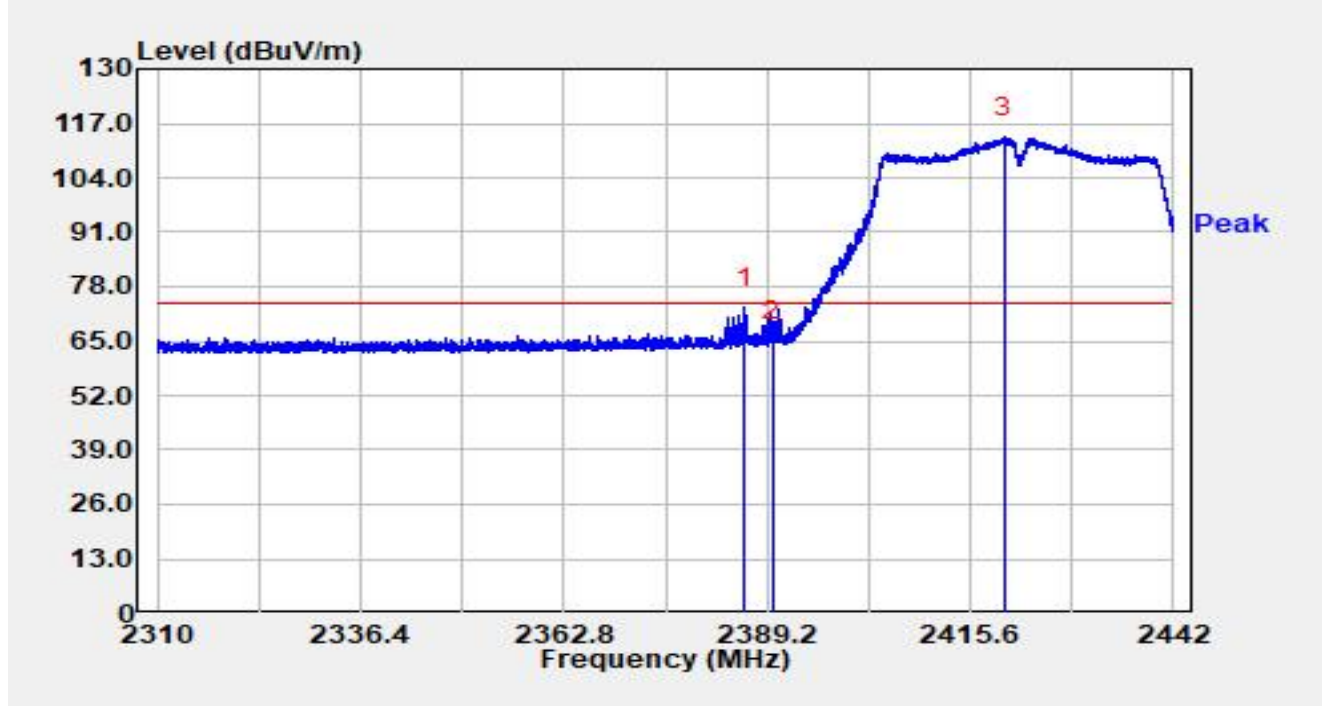


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.336	40.55	32.53	73.08	-0.92	74.00	Peak
2		2390.000	32.35	32.52	64.87	-9.13	74.00	Peak
3		2420.048	81.14	32.44	113.58	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

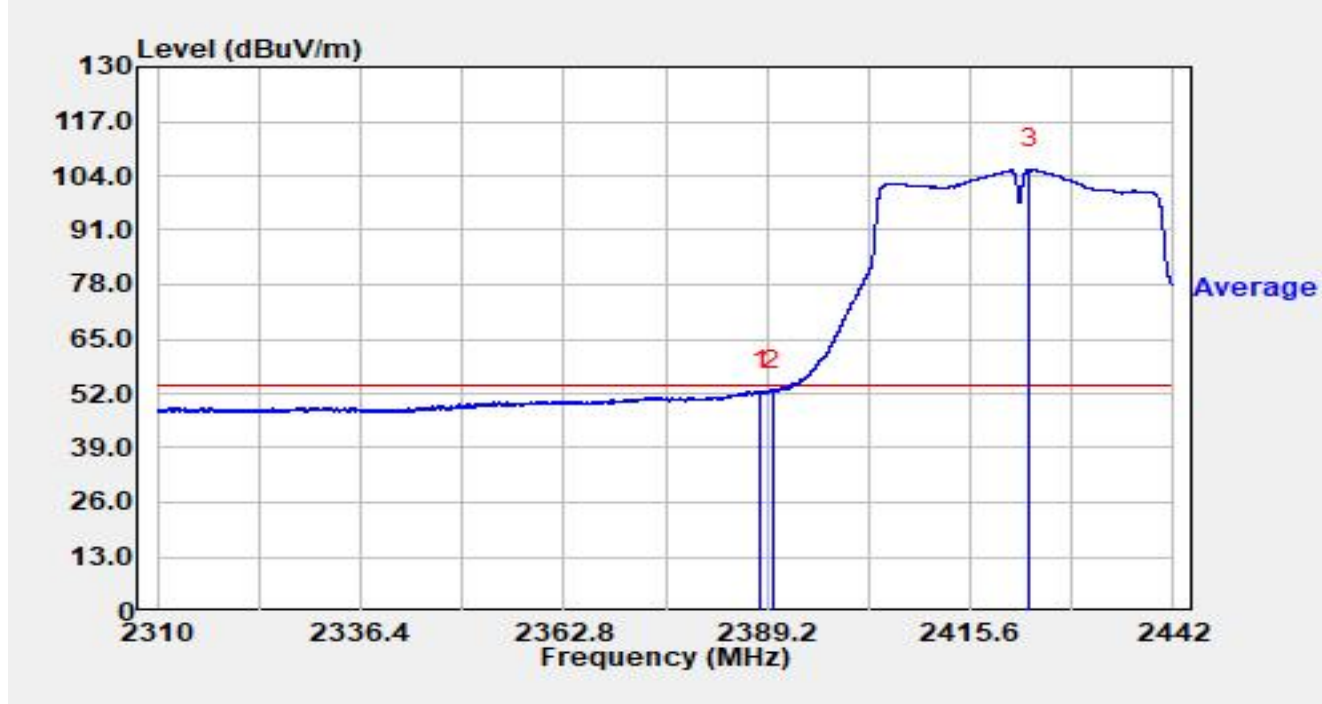


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.342	20.07	32.52	52.60	-1.40	54.00	Average
2	*	2390.000	20.11	32.52	52.63	-1.37	54.00	Average
3		2423.216	73.11	32.43	105.55	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2437MHz		

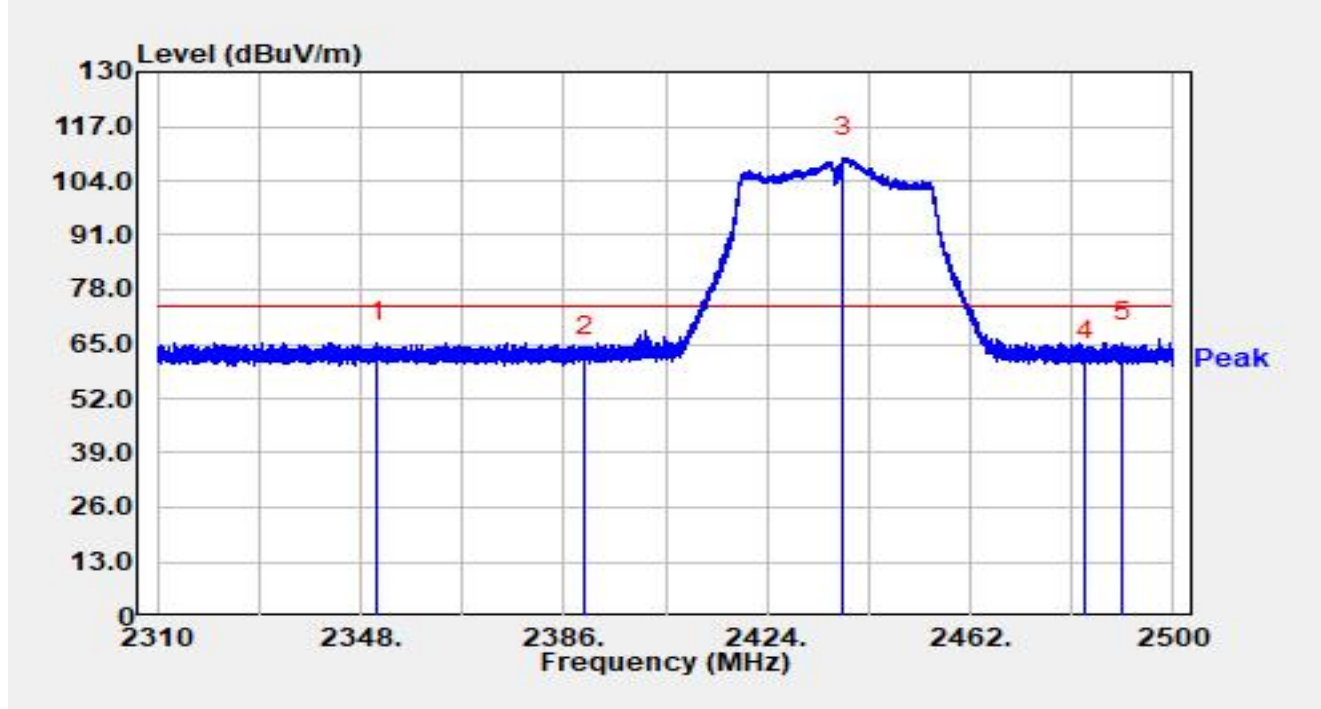


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.059	32.66	32.73	65.38	-8.62	74.00	Peak
2		2390.000	29.37	32.52	61.89	-12.11	74.00	Peak
3		2438.136	77.17	32.39	109.56	N/A	N/A	Peak
4		2483.500	28.81	32.40	61.21	-12.79	74.00	Peak
5		2490.424	32.97	32.39	65.36	-8.64	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2437MHz		

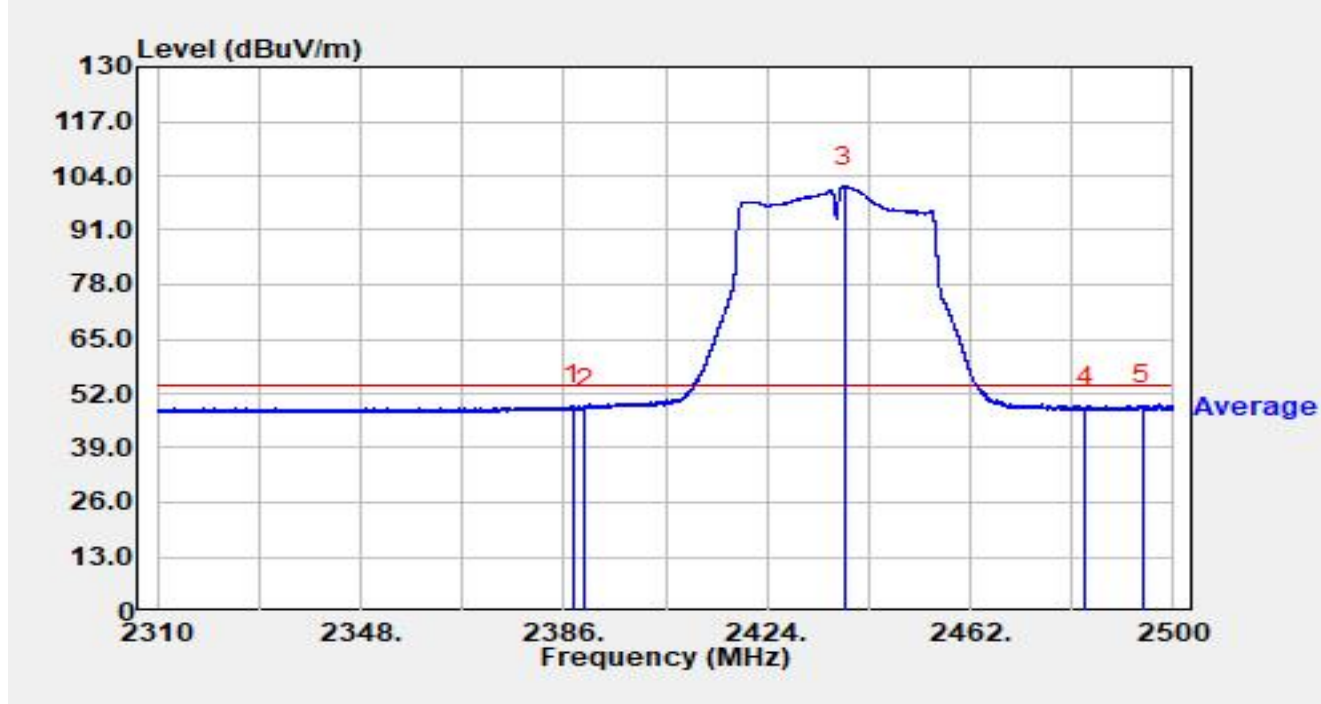


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2387.634	16.60	32.52	49.12	-4.88	54.00	Average
2		2390.000	15.96	32.52	48.48	-5.52	54.00	Average
3		2438.516	69.06	32.39	101.45	N/A	N/A	Average
4		2483.500	16.24	32.40	48.64	-5.36	54.00	Average
5	*	2494.243	16.89	32.39	49.28	-4.72	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2437MHz		

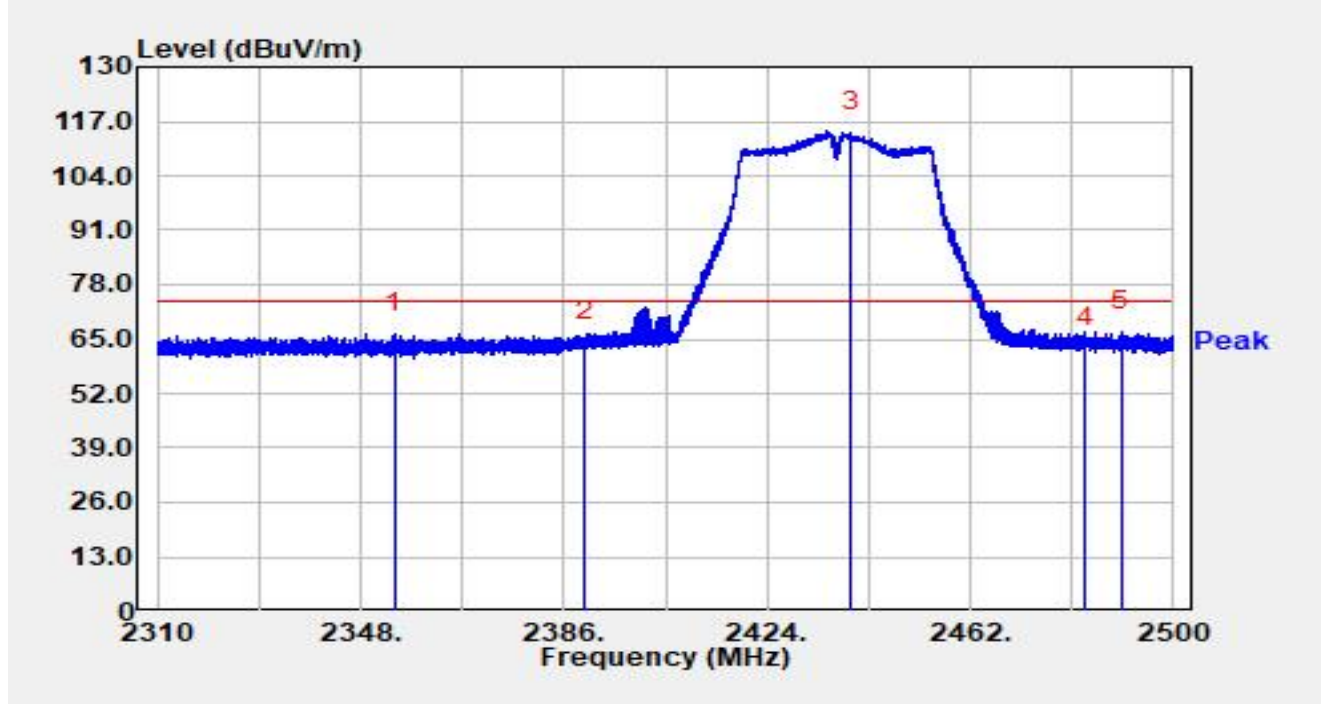


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2354.479	33.55	32.70	66.25	-7.75	74.00	Peak
2		2390.000	31.96	32.52	64.48	-9.52	74.00	Peak
3		2439.808	81.96	32.38	114.34	N/A	N/A	Peak
4		2483.500	30.62	32.40	63.02	-10.98	74.00	Peak
5	*	2490.253	34.35	32.39	66.74	-7.26	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2437MHz		

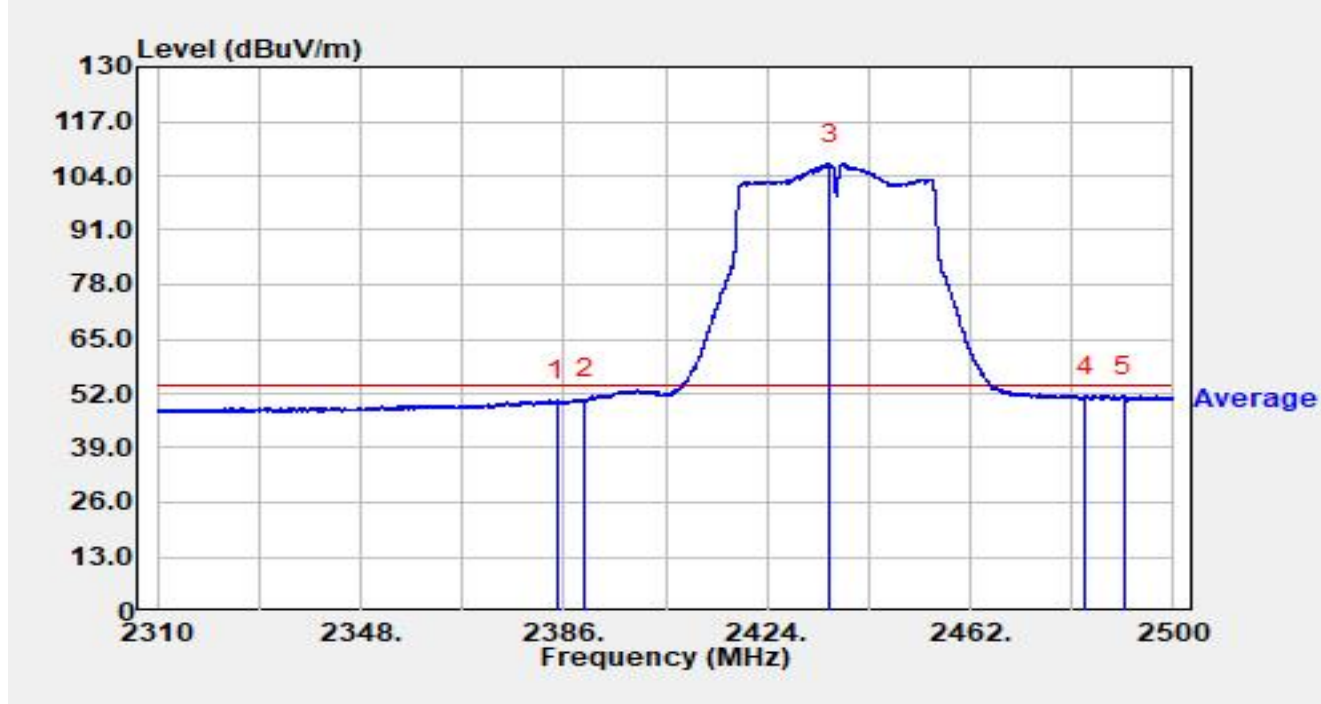


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2384.822	17.97	32.53	50.49	-3.51	54.00	Average
2		2390.000	18.05	32.52	50.57	-3.43	54.00	Average
3		2435.761	74.51	32.39	106.90	N/A	N/A	Average
4		2483.500	18.99	32.40	51.39	-2.61	54.00	Average
5	*	2490.614	19.05	32.39	51.44	-2.56	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

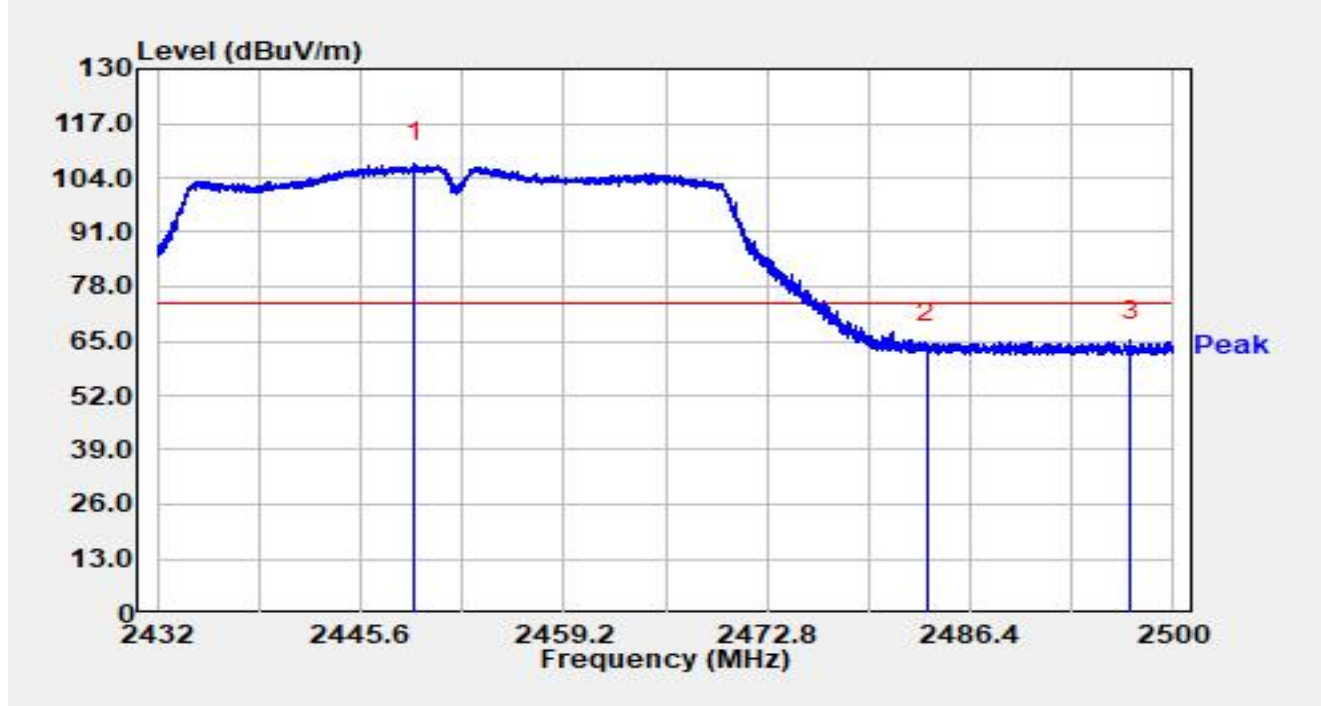


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2449.238	75.06	32.38	107.44	N/A	N/A	Peak
2		2483.500	32.08	32.40	64.48	-9.52	74.00	Peak
3	*	2497.110	32.77	32.40	65.17	-8.83	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

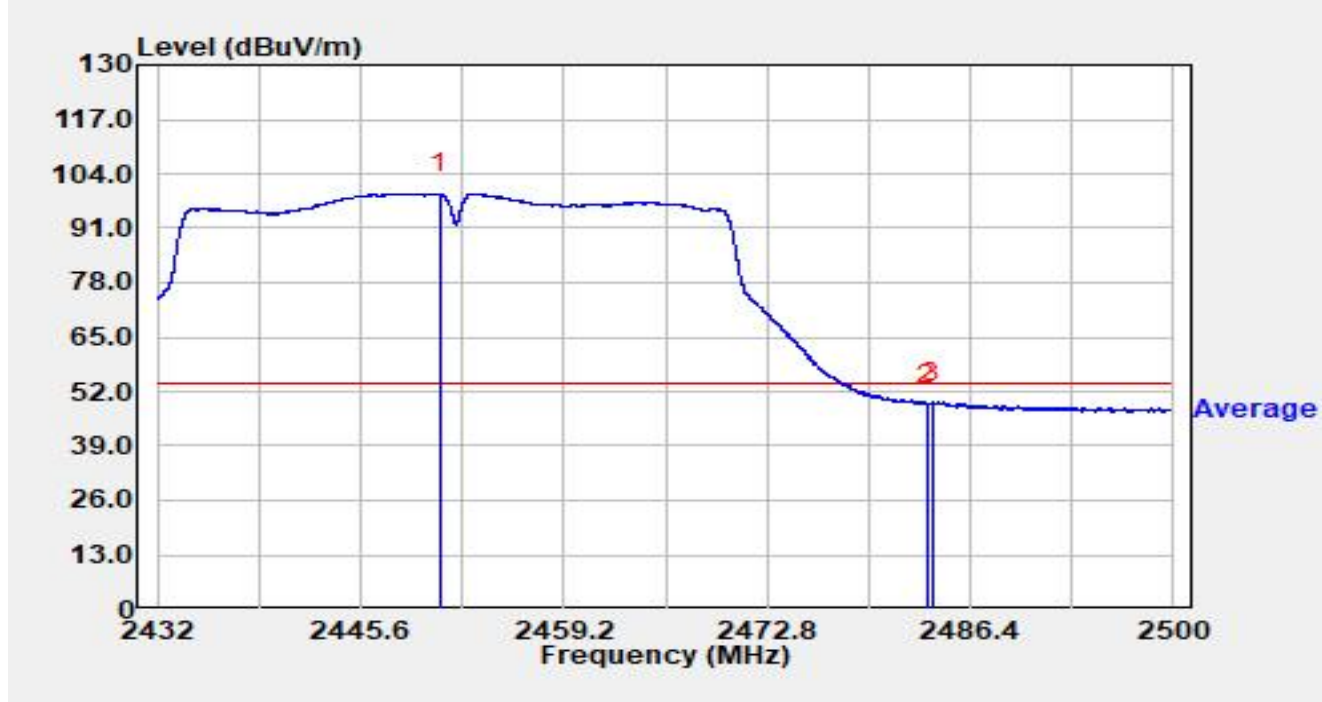


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.938	66.96	32.37	99.33	N/A	N/A	Average
2		2483.500	16.62	32.40	49.02	-4.98	54.00	Average
3	*	2483.870	17.06	32.40	49.45	-4.55	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

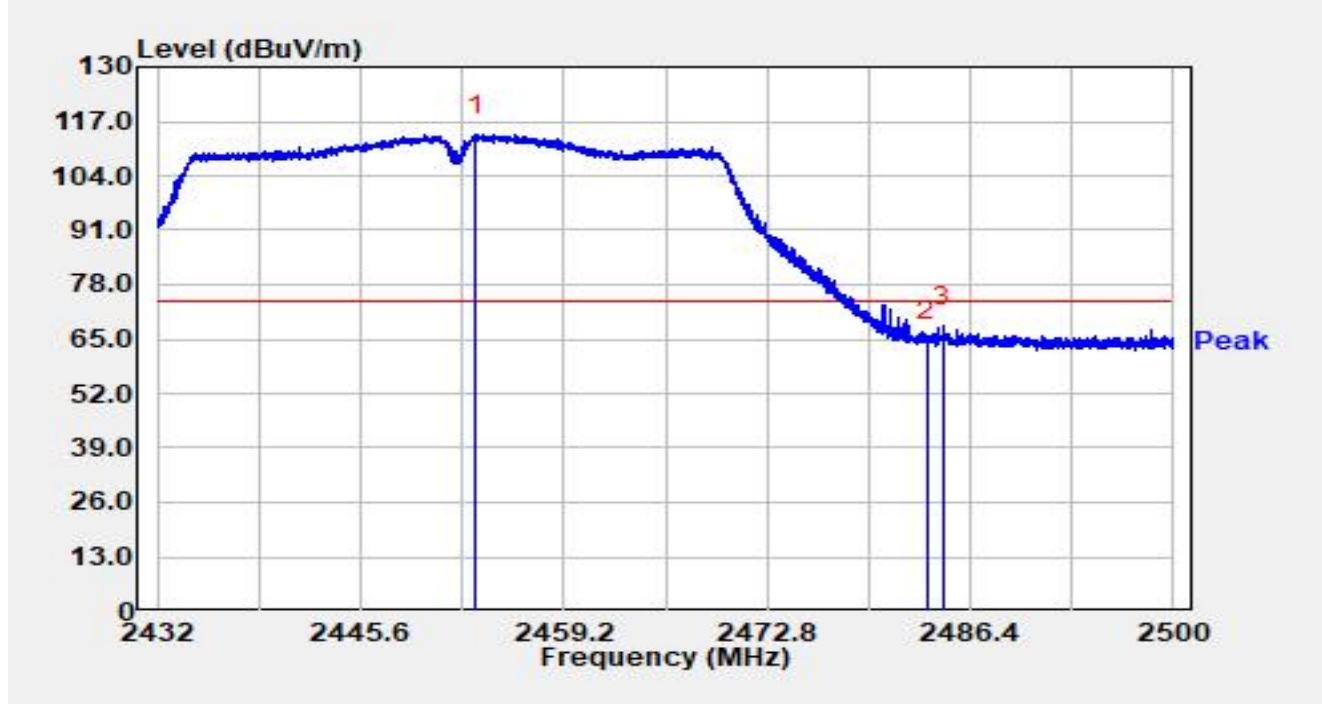


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.325	81.41	32.37	113.78	N/A	N/A	Peak
2		2483.500	31.94	32.40	64.34	-9.66	74.00	Peak
3	*	2484.584	35.73	32.40	68.13	-5.87	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

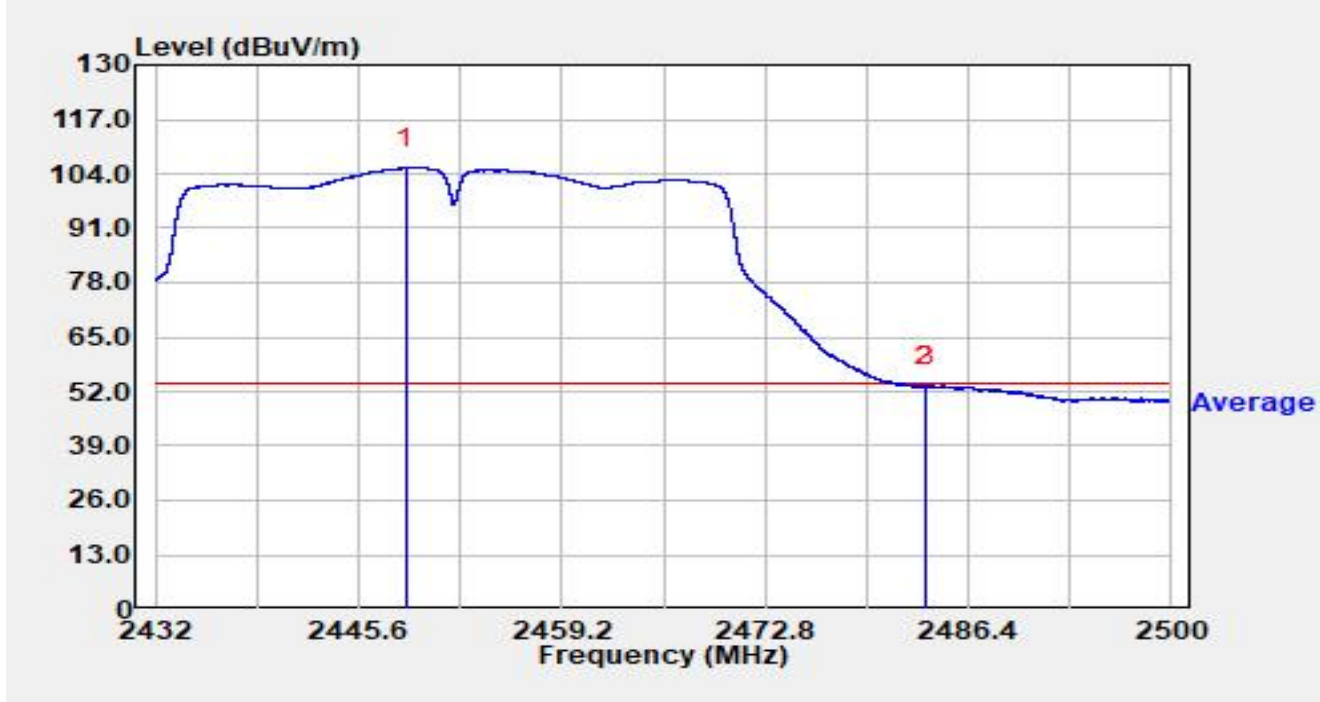


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2448.755	73.01	32.38	105.38	N/A	N/A	Average
2		2483.500	20.84	32.40	53.24	-0.76	54.00	Average
3	*	2483.625	21.04	32.40	53.44	-0.56	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

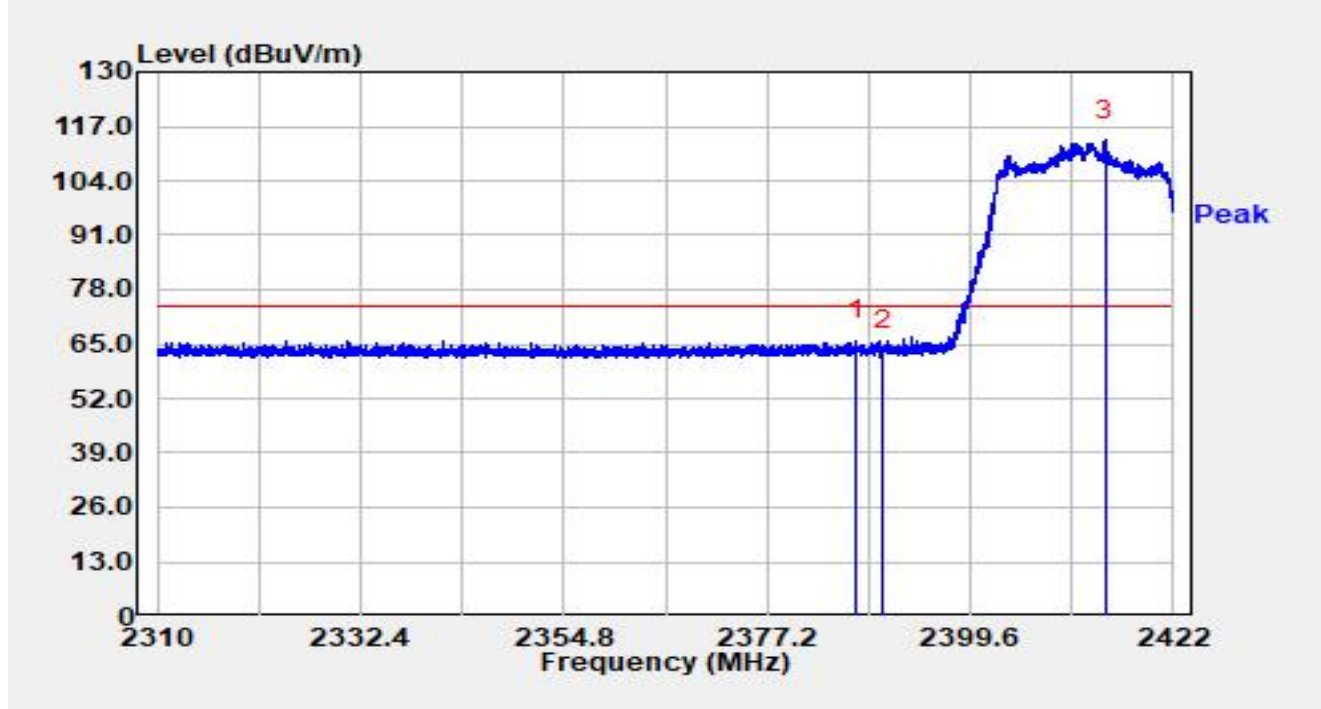


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.101	33.30	32.52	65.83	-8.17	74.00	Peak
2		2390.000	31.19	32.52	63.70	-10.30	74.00	Peak
3		2414.485	81.22	32.46	113.68	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

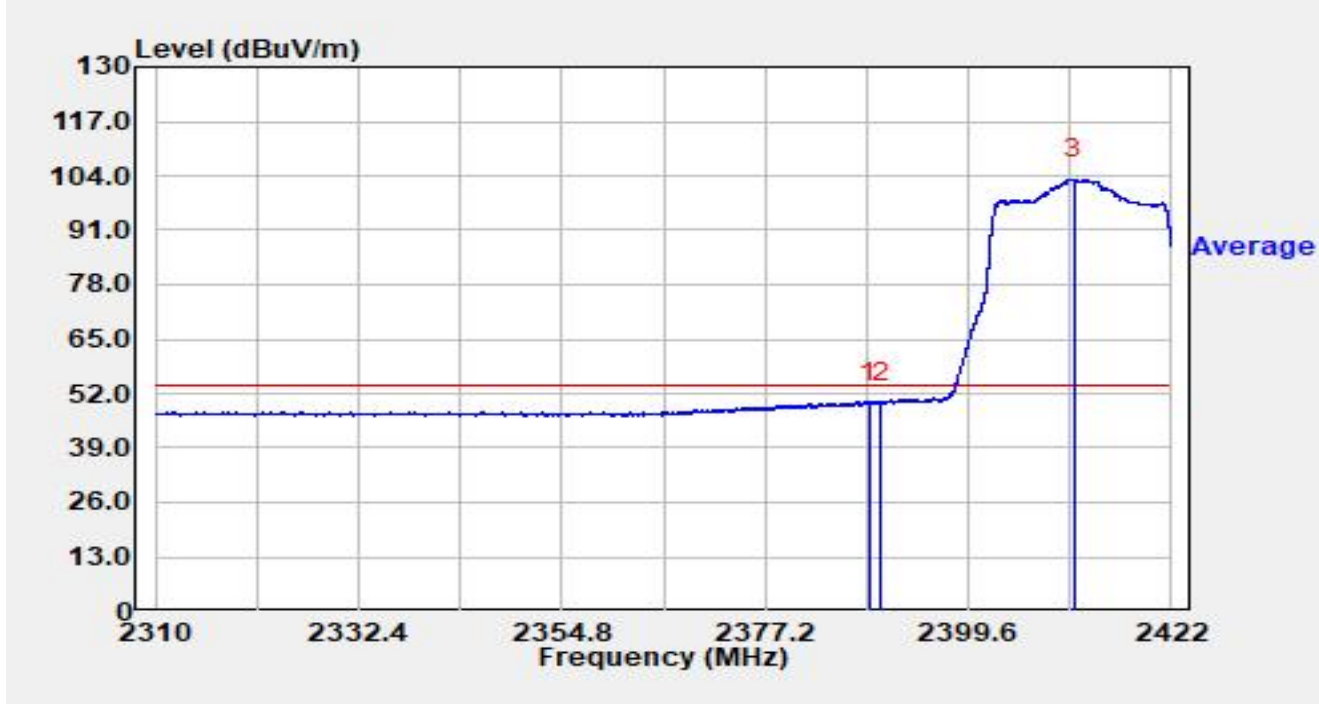


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.613	17.40	32.52	49.93	-4.07	54.00	Average
2		2390.000	17.31	32.52	49.83	-4.17	54.00	Average
3		2411.259	70.65	32.46	103.12	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

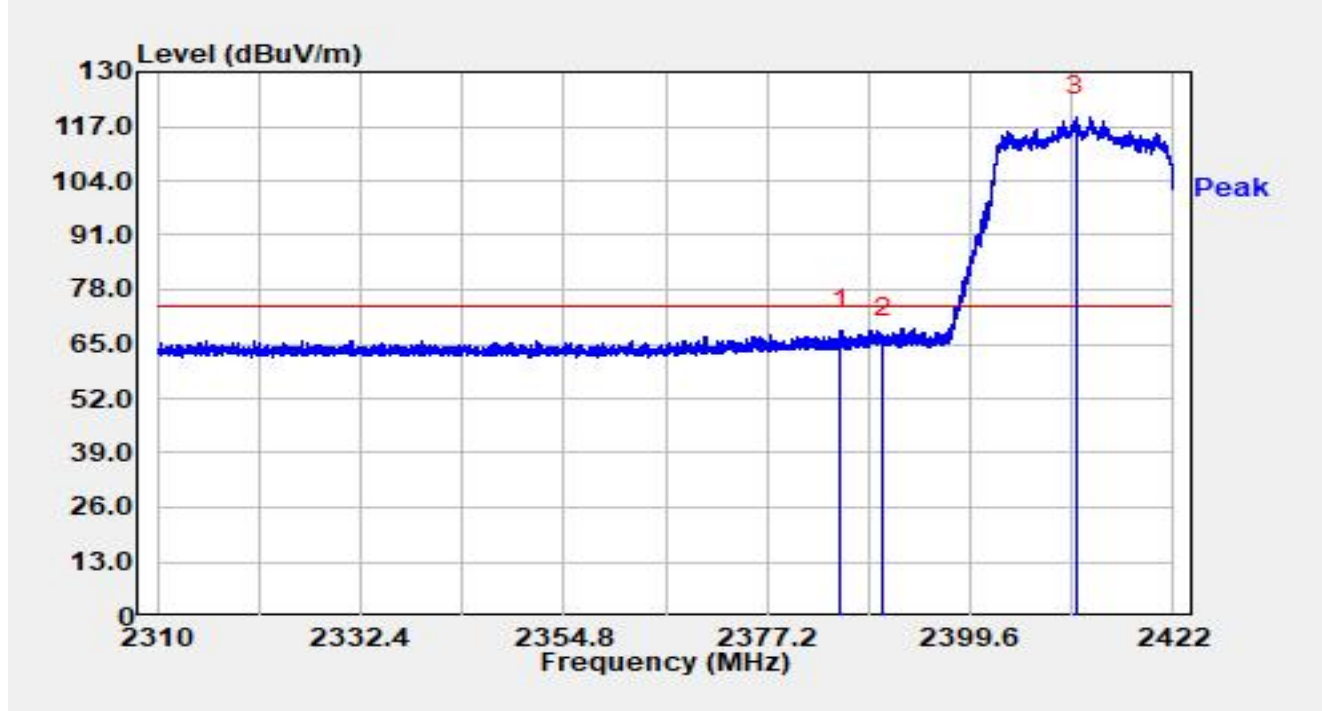


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.354	35.78	32.53	68.30	-5.70	74.00	Peak
2		2390.000	33.95	32.52	66.47	-7.53	74.00	Peak
3		2411.259	86.91	32.46	119.38	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

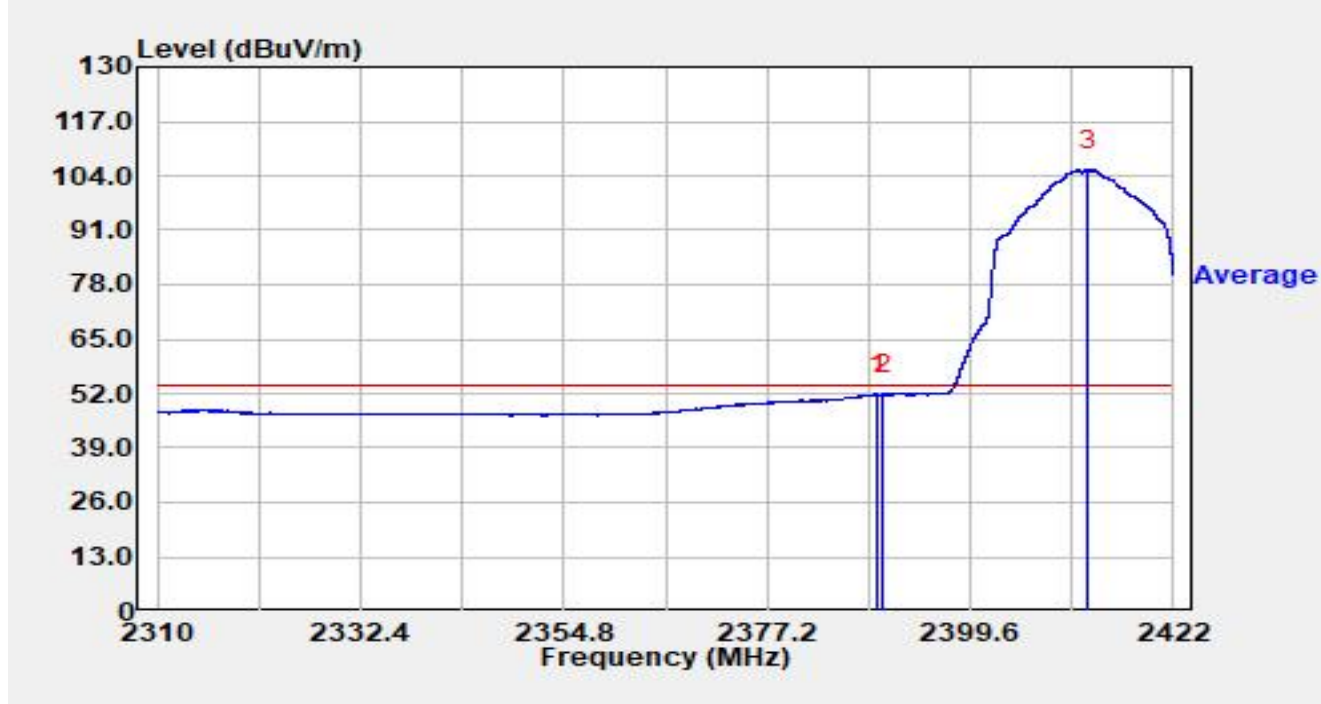


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.375	19.28	32.52	51.80	-2.20	54.00	Average
2		2390.000	19.25	32.52	51.77	-2.23	54.00	Average
3		2412.570	72.97	32.46	105.44	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

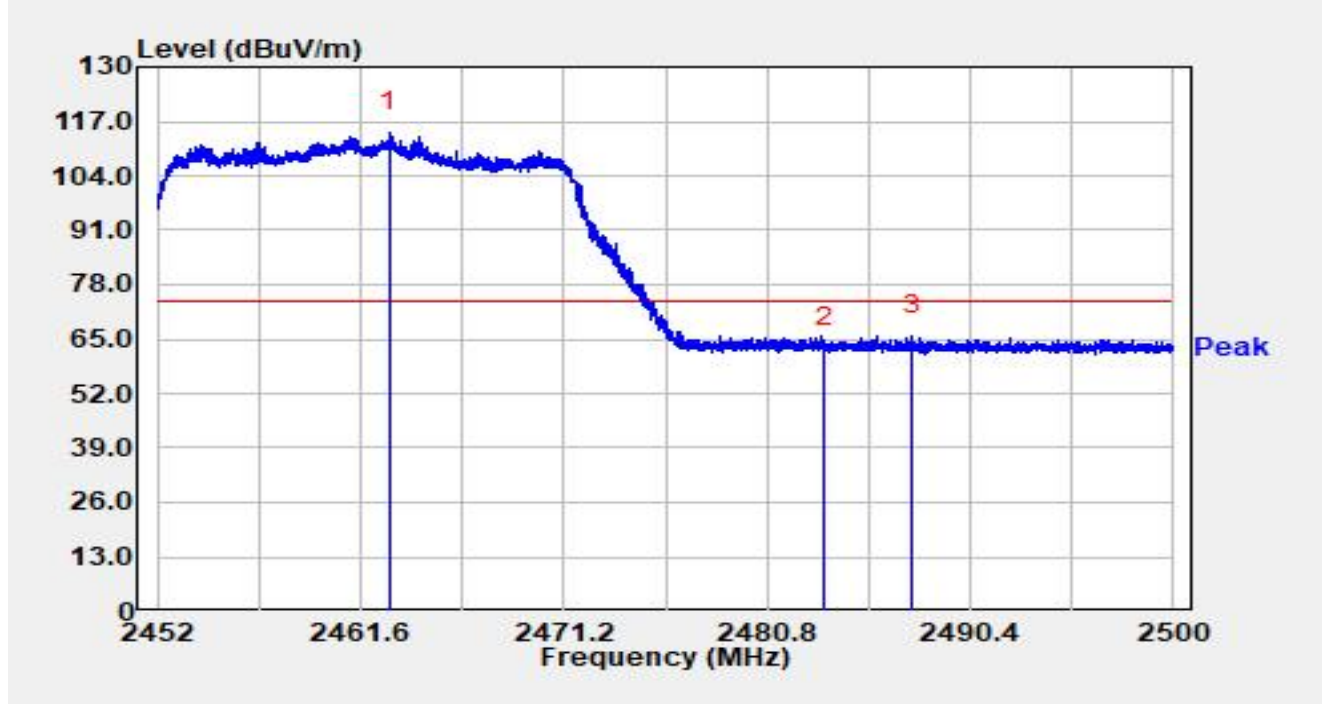


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.978	82.05	32.37	114.42	N/A	N/A	Peak
2		2483.500	30.82	32.40	63.22	-10.78	74.00	Peak
3	*	2487.645	33.52	32.39	65.91	-8.09	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

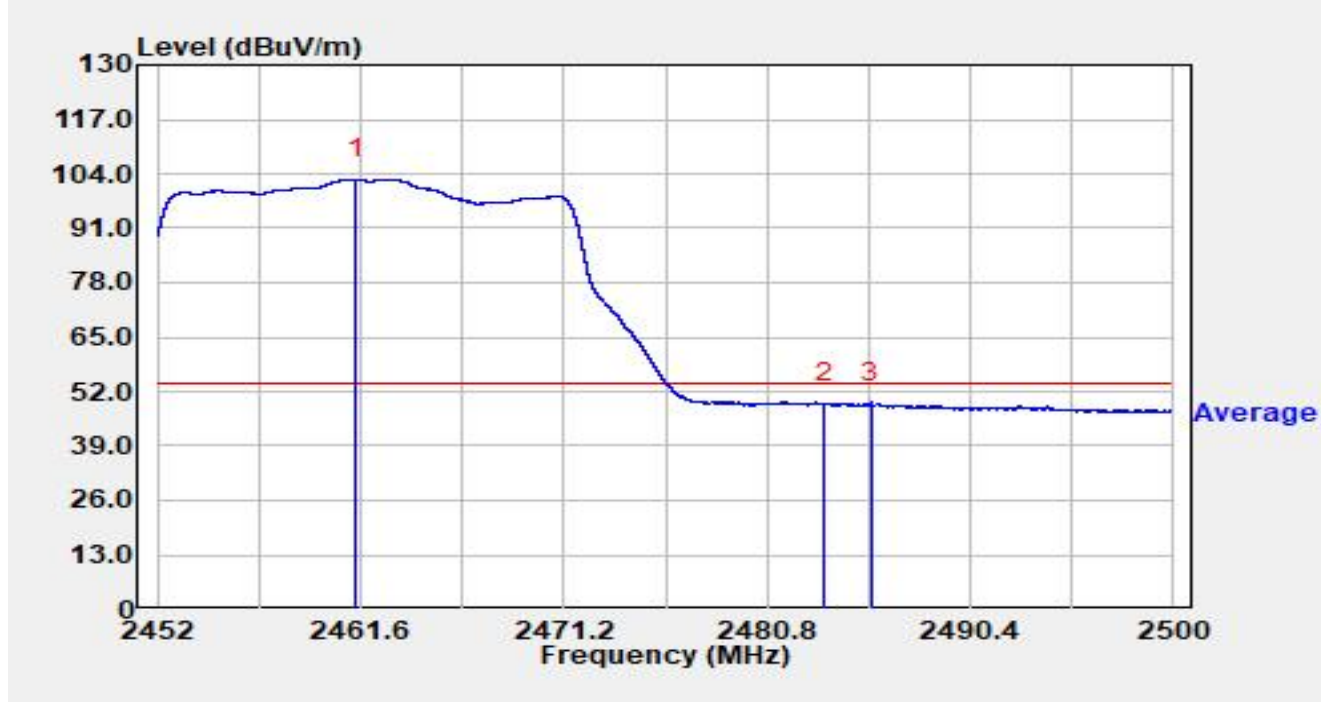


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.389	70.36	32.37	102.73	N/A	N/A	Average
2		2483.500	16.74	32.40	49.14	-4.86	54.00	Average
3	*	2485.720	16.93	32.40	49.33	-4.67	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

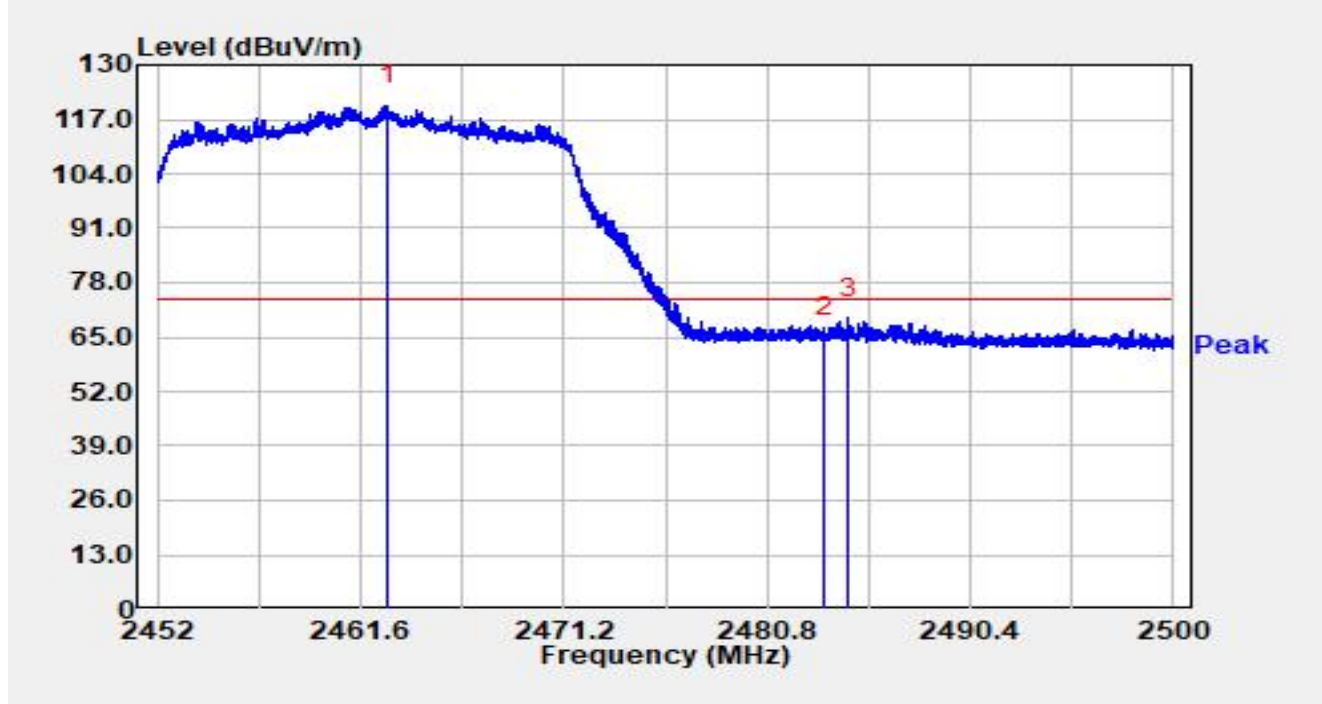


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.906	87.91	32.37	120.29	N/A	N/A	Peak
2		2483.500	32.70	32.40	65.09	-8.91	74.00	Peak
3	*	2484.635	37.24	32.40	69.64	-4.36	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Jerry Lu
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

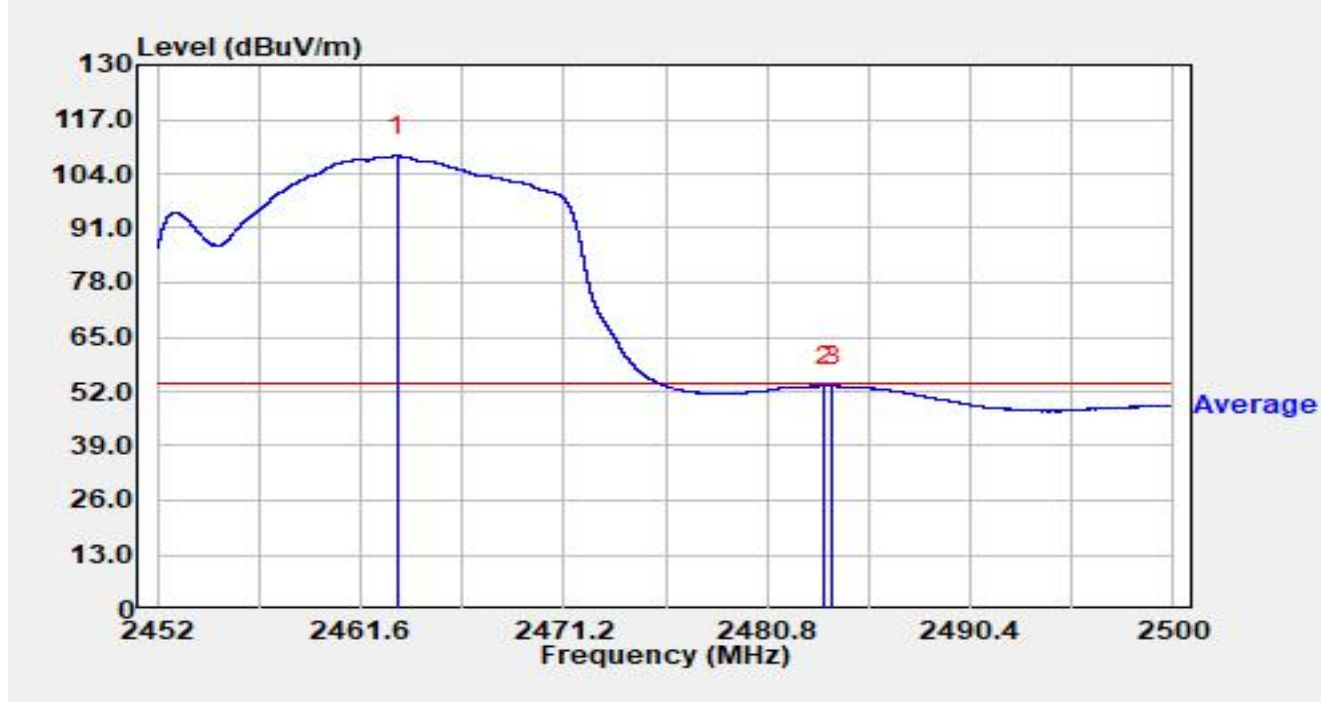


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.318	75.84	32.38	108.22	N/A	N/A	Average
2		2483.500	20.94	32.40	53.34	-0.66	54.00	Average
3	*	2483.891	20.96	32.40	53.35	-0.65	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

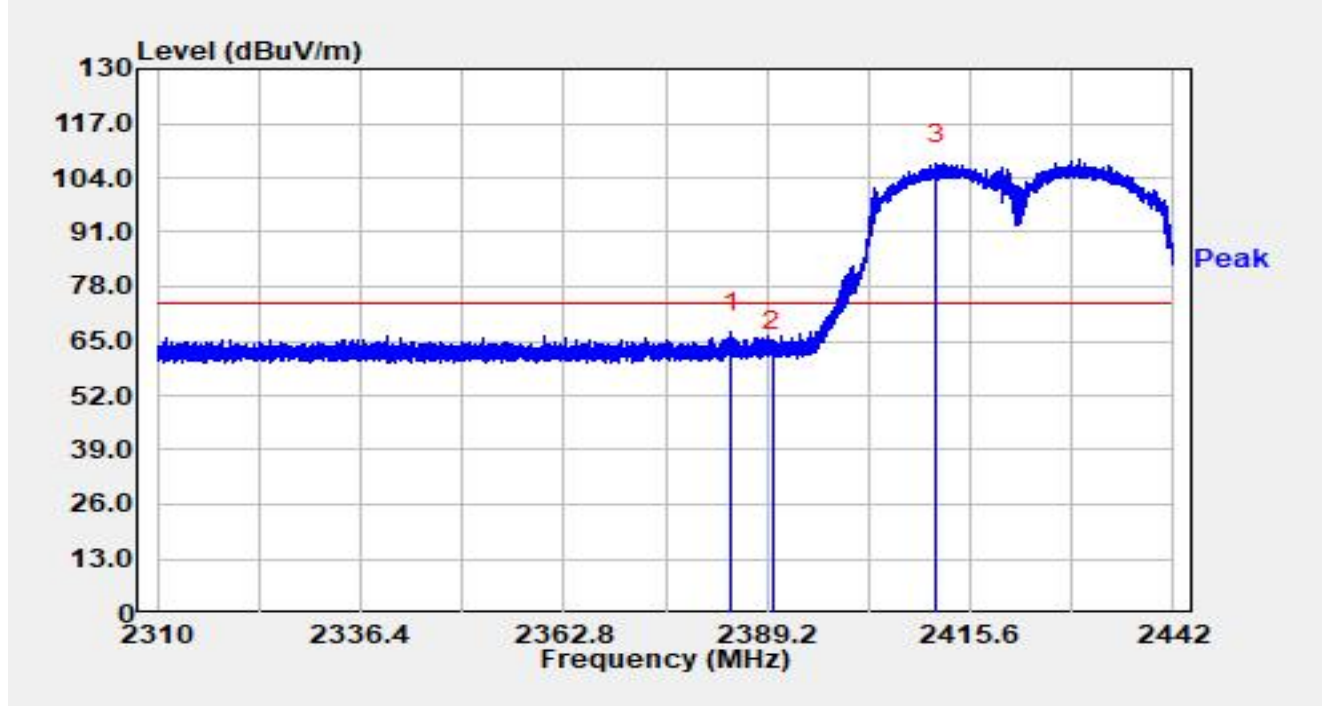


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.514	34.66	32.53	67.18	-6.82	74.00	Peak
2		2390.000	30.20	32.52	62.72	-11.28	74.00	Peak
3		2411.191	74.77	32.46	107.23	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

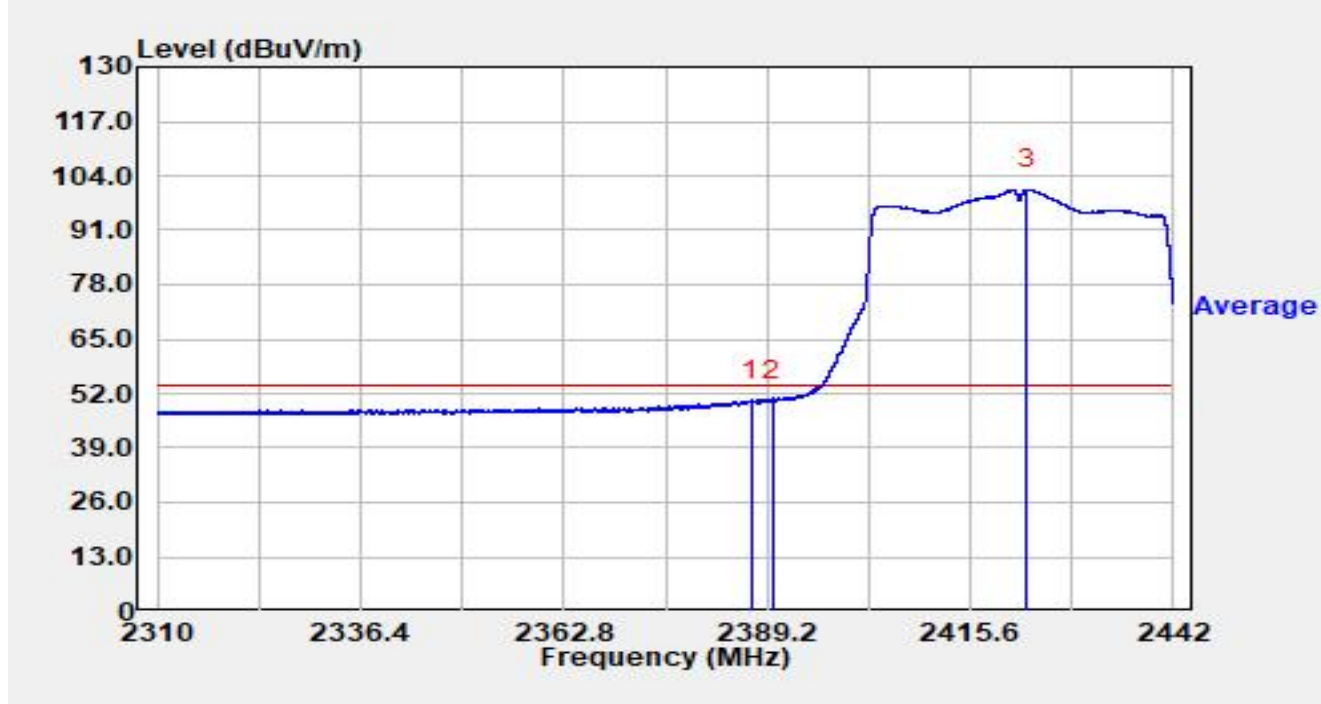


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2387.141	17.83	32.52	50.35	-3.65	54.00	Average
2	*	2390.000	17.88	32.52	50.40	-3.60	54.00	Average
3		2422.966	68.37	32.44	100.81	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

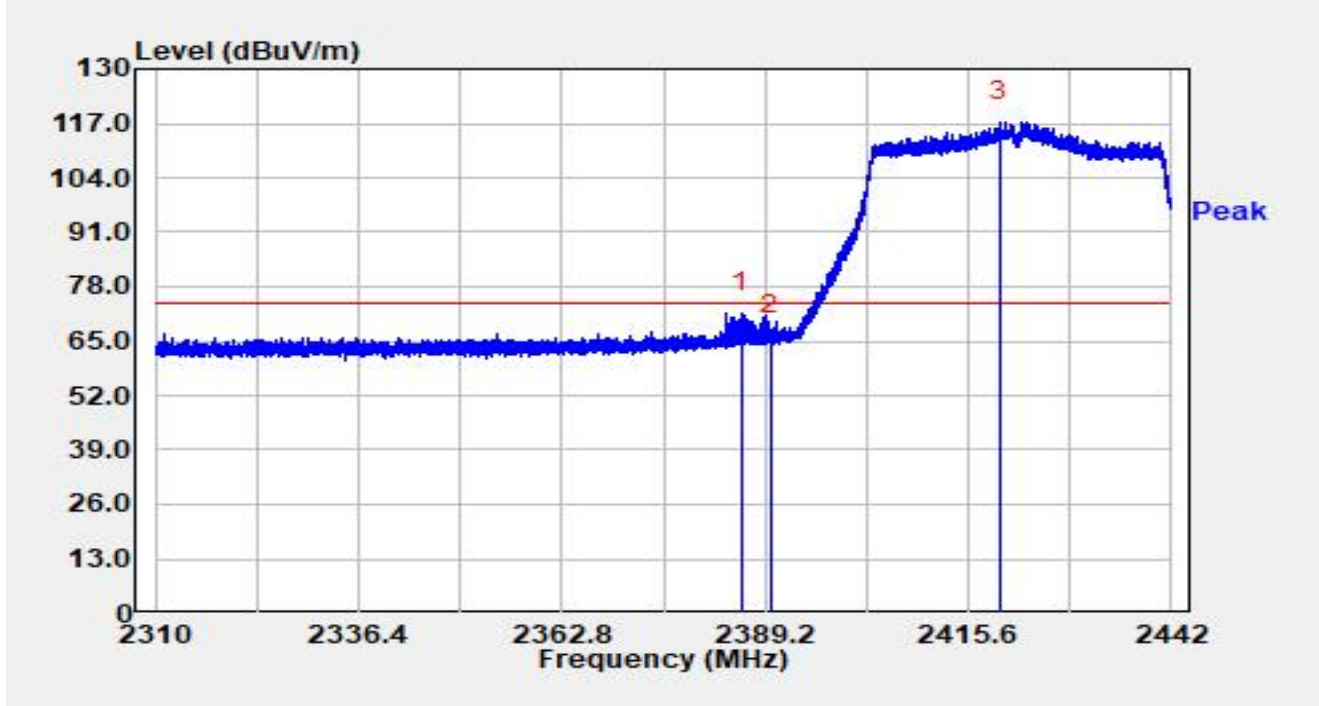


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.125	39.18	32.53	71.71	-2.29	74.00	Peak
2		2390.000	33.78	32.52	66.30	-7.70	74.00	Peak
3		2419.600	84.88	32.45	117.32	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

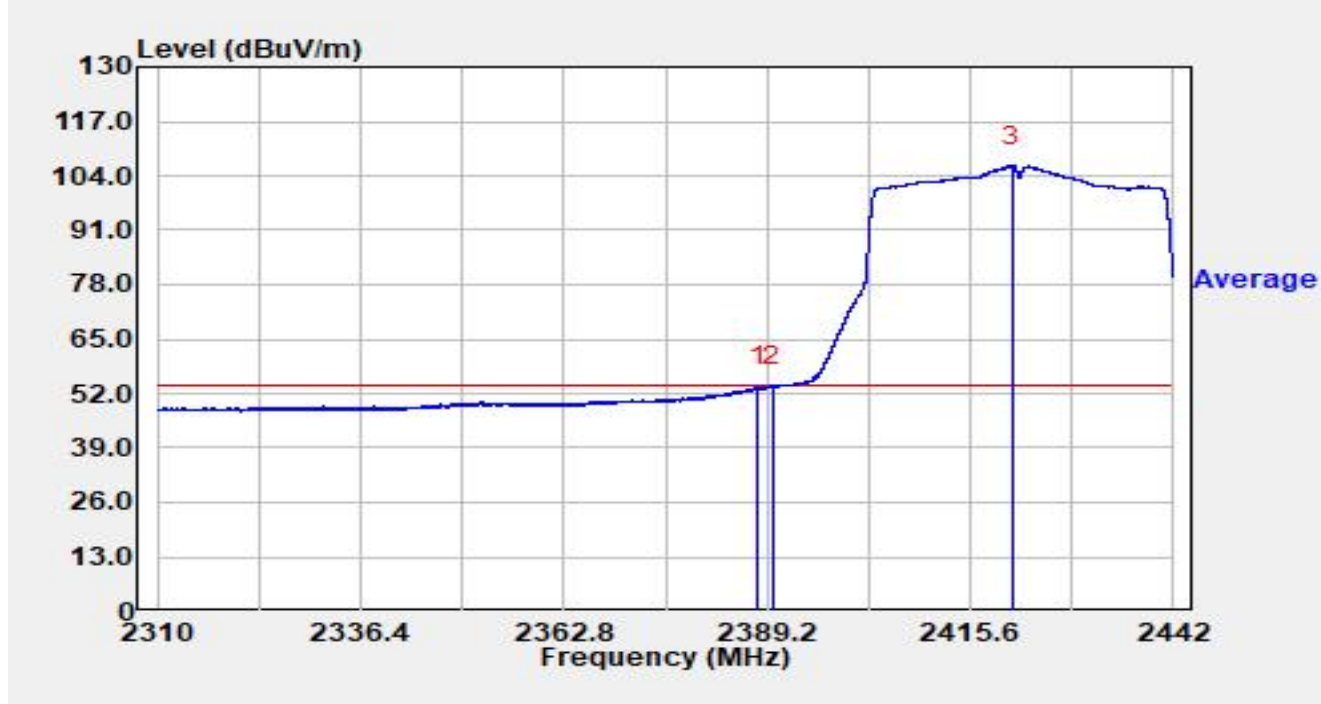


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.052	20.96	32.52	53.49	-0.51	54.00	Average
2	*	2390.000	21.10	32.52	53.62	-0.38	54.00	Average
3		2420.972	73.96	32.44	106.40	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

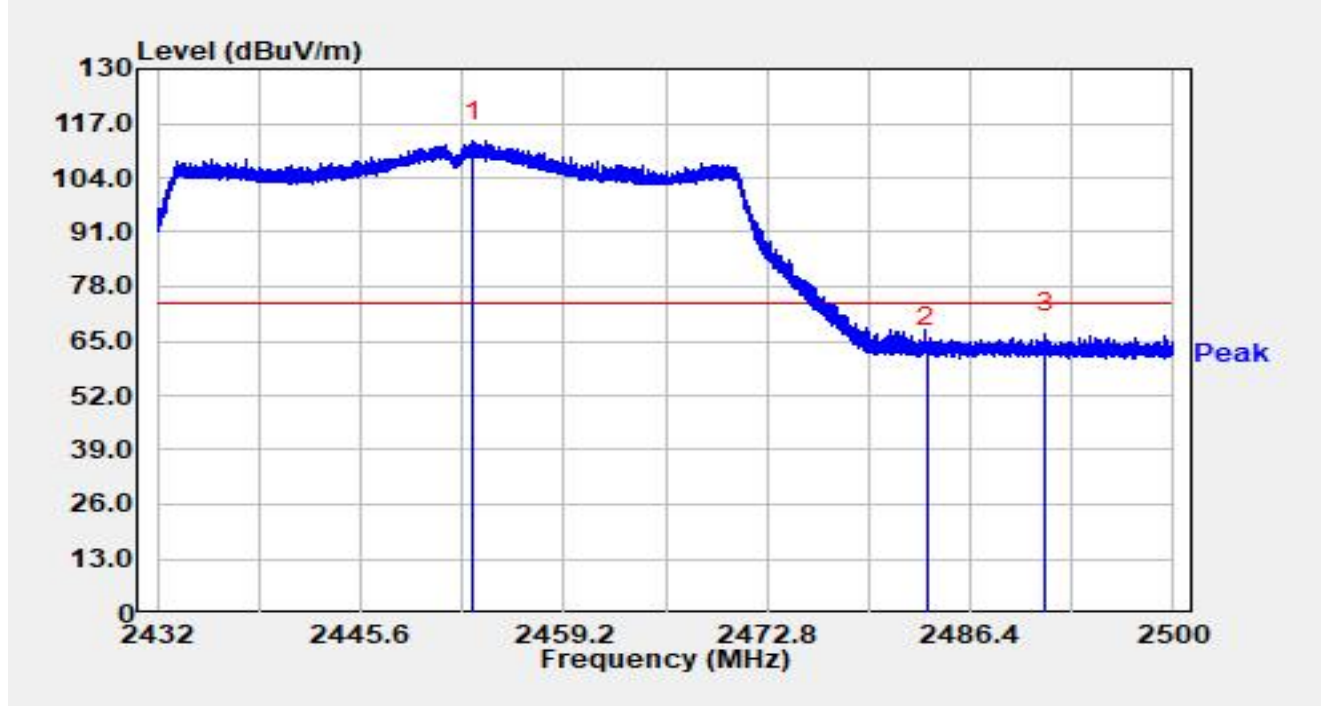


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.148	80.32	32.37	112.69	N/A	N/A	Peak
2		2483.500	31.31	32.40	63.71	-10.29	74.00	Peak
3	*	2491.452	34.37	32.39	66.76	-7.24	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

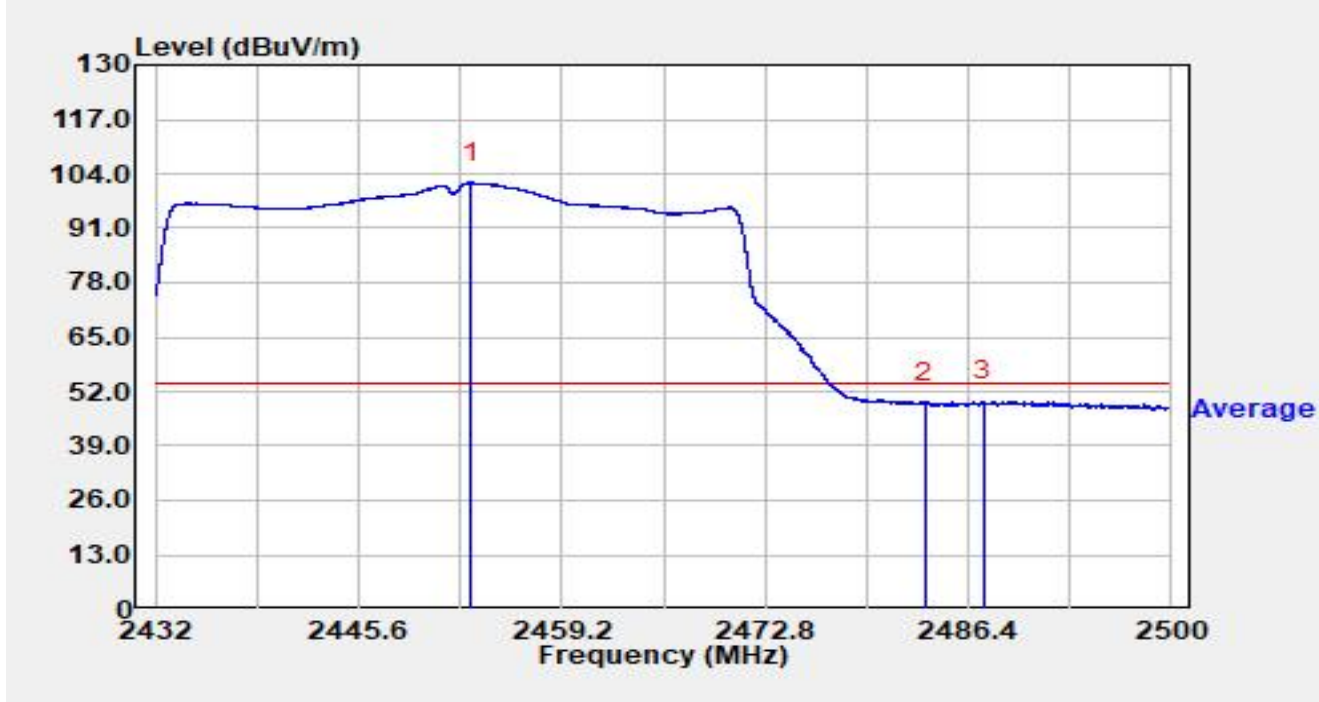


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.141	69.47	32.37	101.84	N/A	N/A	Average
2		2483.500	16.97	32.40	49.37	-4.63	54.00	Average
3	*	2487.386	17.32	32.39	49.71	-4.29	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

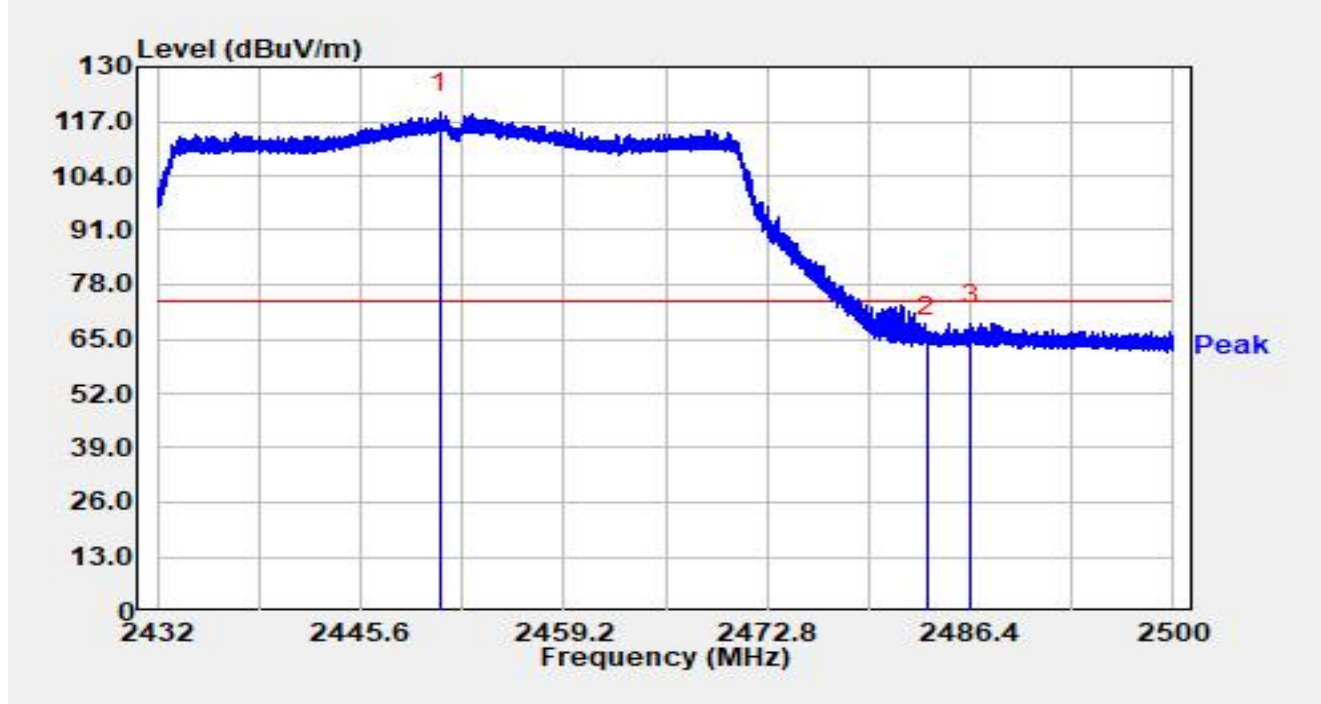


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2450.911	86.76	32.37	119.13	N/A	N/A	Peak
2		2483.500	32.96	32.40	65.36	-8.64	74.00	Peak
3	*	2486.427	36.20	32.39	68.59	-5.41	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

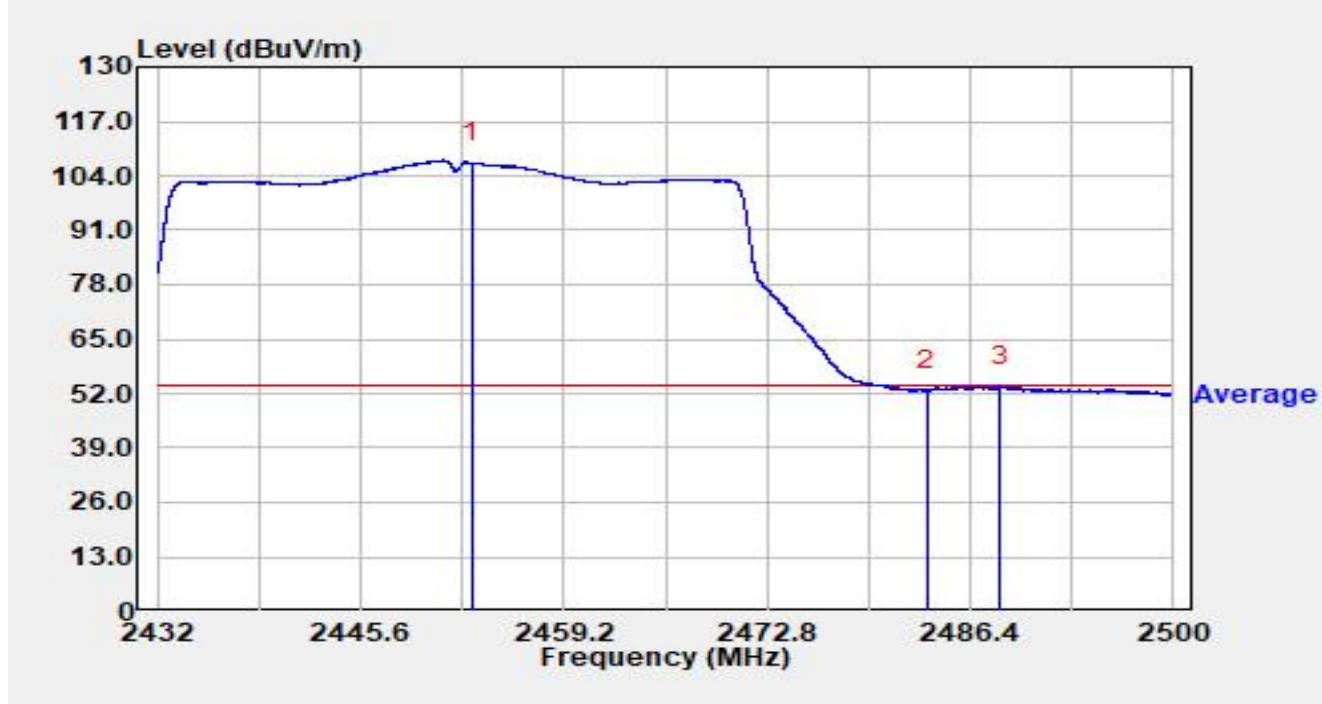


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.066	74.82	32.37	107.18	N/A	N/A	Average
2		2483.500	20.35	32.40	52.75	-1.25	54.00	Average
3	*	2488.406	21.45	32.39	53.84	-0.16	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

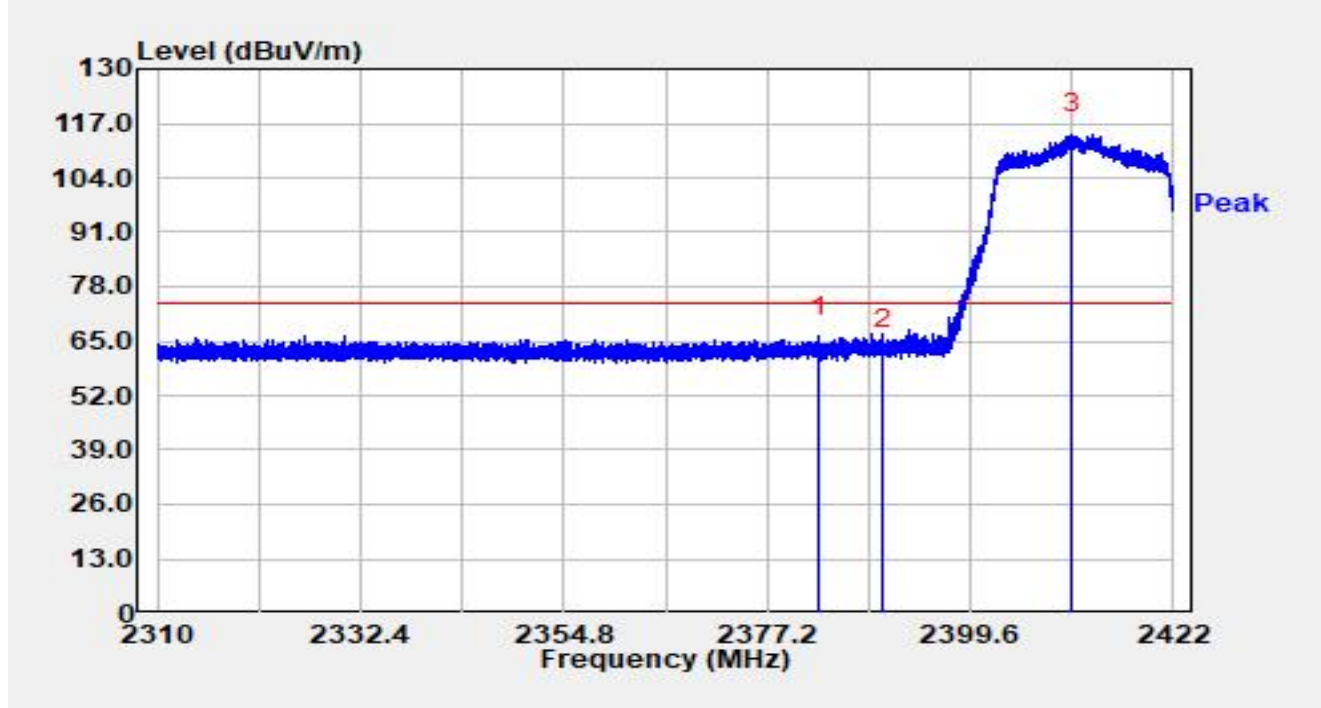


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2382.968	33.60	32.53	66.13	-7.87	74.00	Peak
2		2390.000	30.49	32.52	63.01	-10.99	74.00	Peak
3		2410.800	81.91	32.47	114.37	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

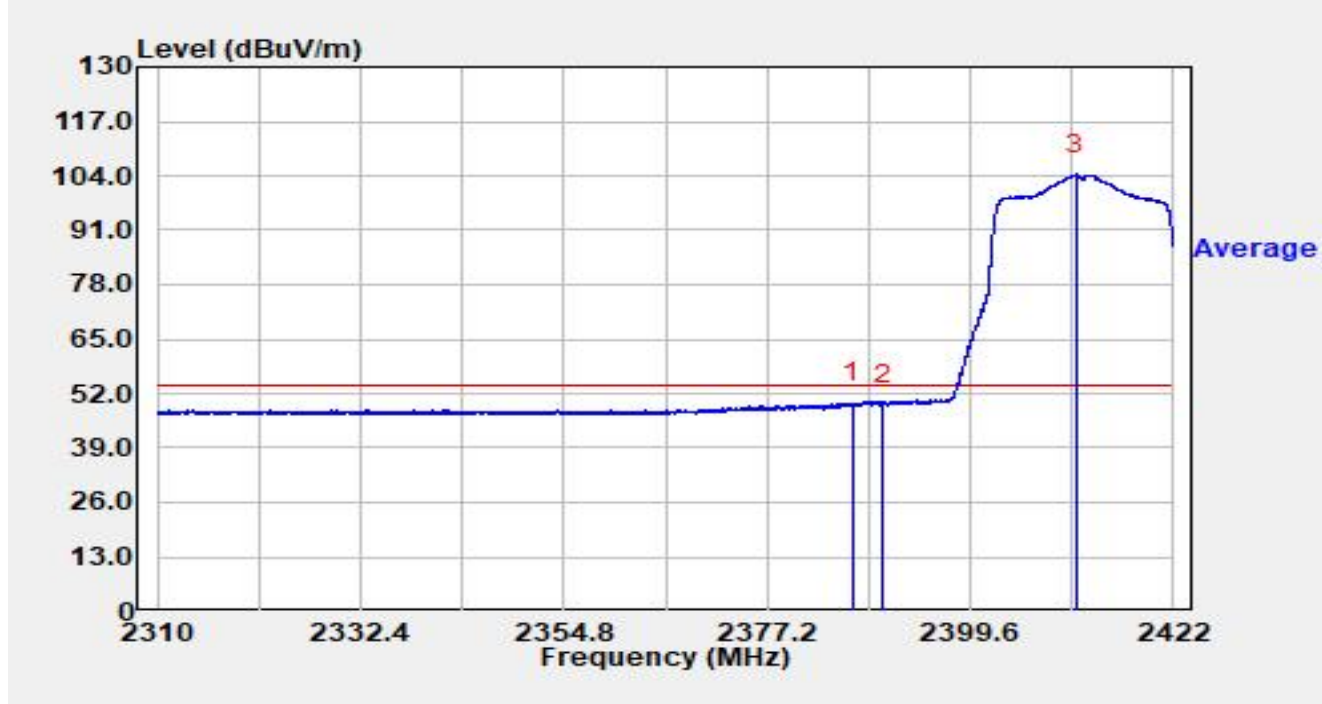


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.541	17.23	32.52	49.75	-4.25	54.00	Average
2		2390.000	16.97	32.52	49.49	-4.51	54.00	Average
3		2411.315	71.85	32.46	104.31	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

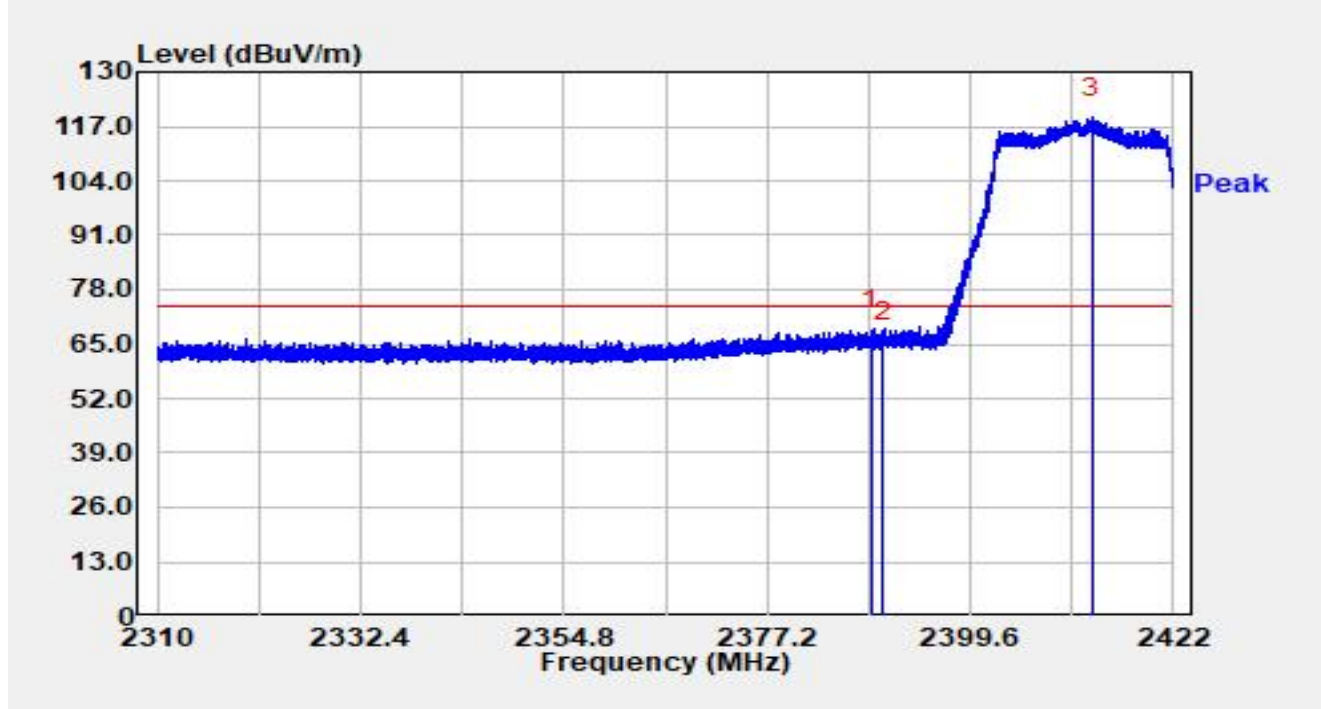


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.613	35.85	32.52	68.37	-5.63	74.00	Peak
2		2390.000	32.80	32.52	65.31	-8.69	74.00	Peak
3		2413.085	86.64	32.46	119.10	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

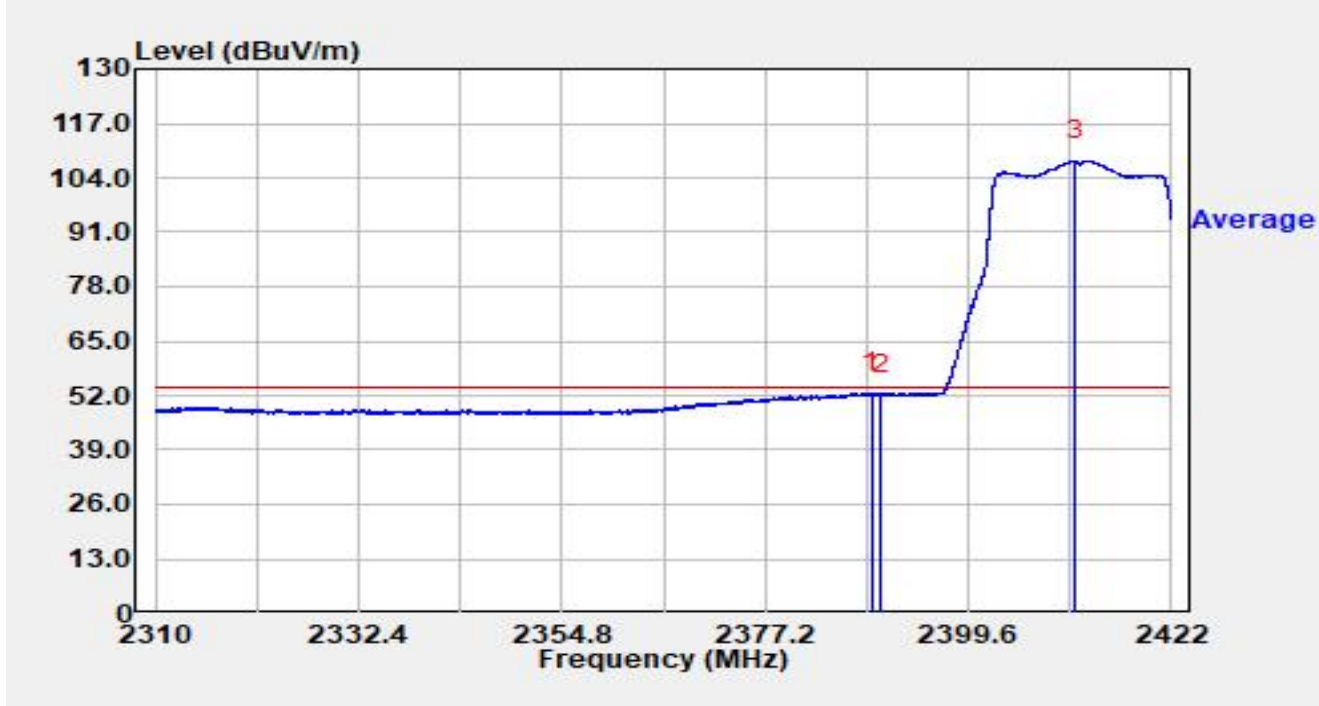


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.904	20.11	32.52	52.63	-1.37	54.00	Average
2		2390.000	19.90	32.52	52.42	-1.58	54.00	Average
3		2411.349	75.69	32.46	108.15	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

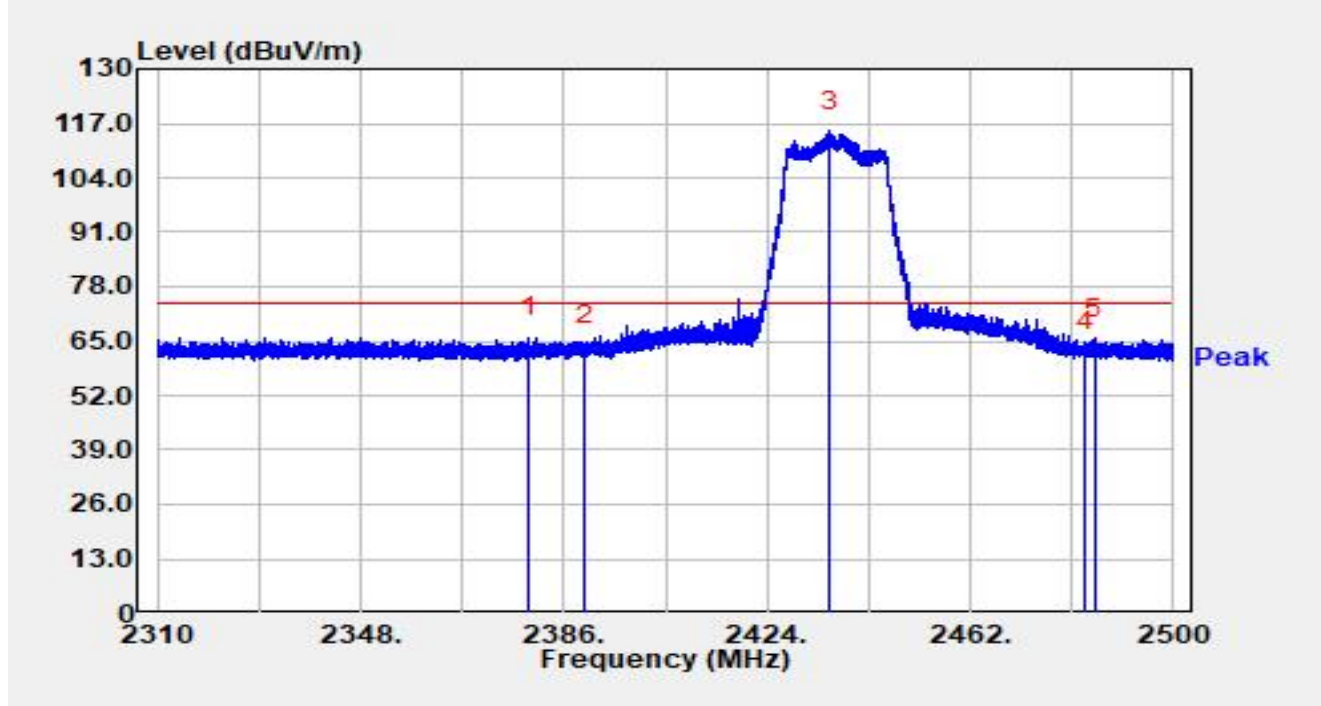


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2379.445	33.38	32.55	65.92	-8.08	74.00	Peak
2		2390.000	31.47	32.52	63.99	-10.01	74.00	Peak
3		2435.742	82.68	32.39	115.07	N/A	N/A	Peak
4		2483.500	30.34	32.40	62.74	-11.26	74.00	Peak
5		2485.332	33.30	32.40	65.69	-8.31	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

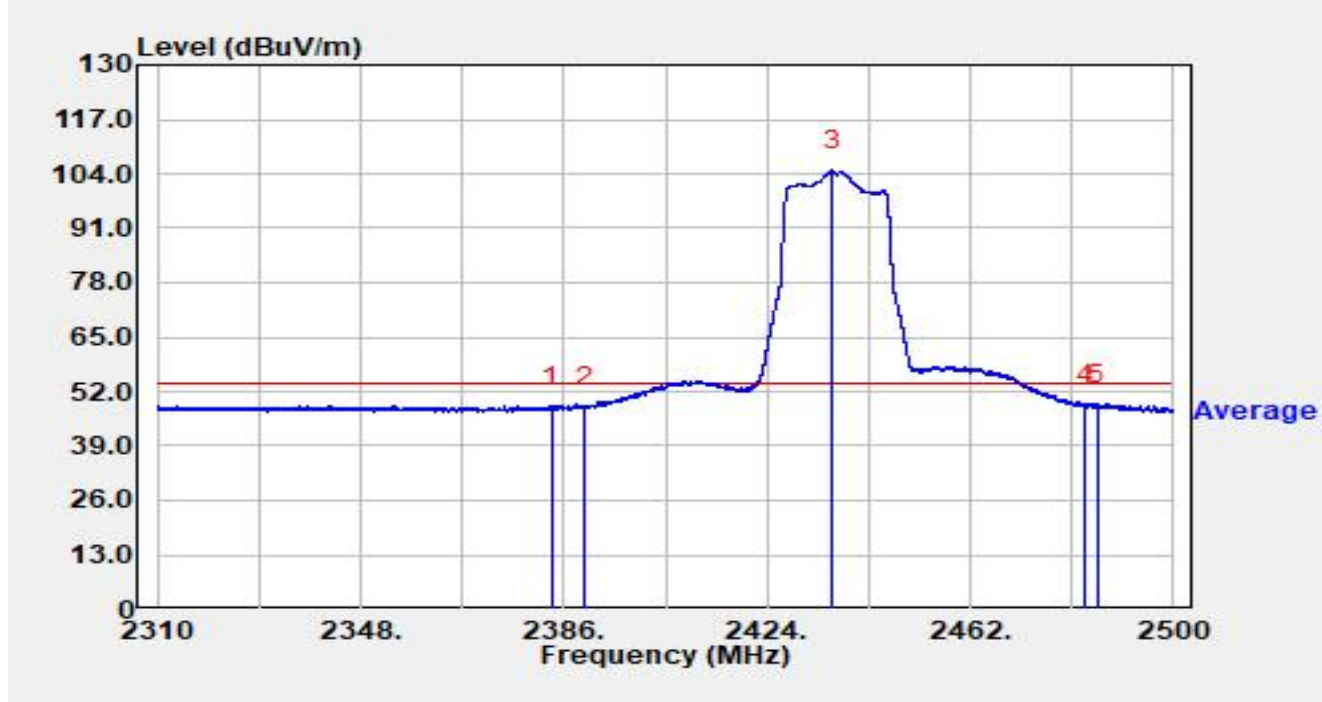


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2383.663	15.79	32.53	48.33	-5.67	54.00	Average
2		2390.000	15.88	32.52	48.40	-5.60	54.00	Average
3		2436.141	72.40	32.39	104.79	N/A	N/A	Average
4	*	2483.500	16.65	32.40	49.05	-4.95	54.00	Average
5		2485.845	16.65	32.40	49.05	-4.95	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

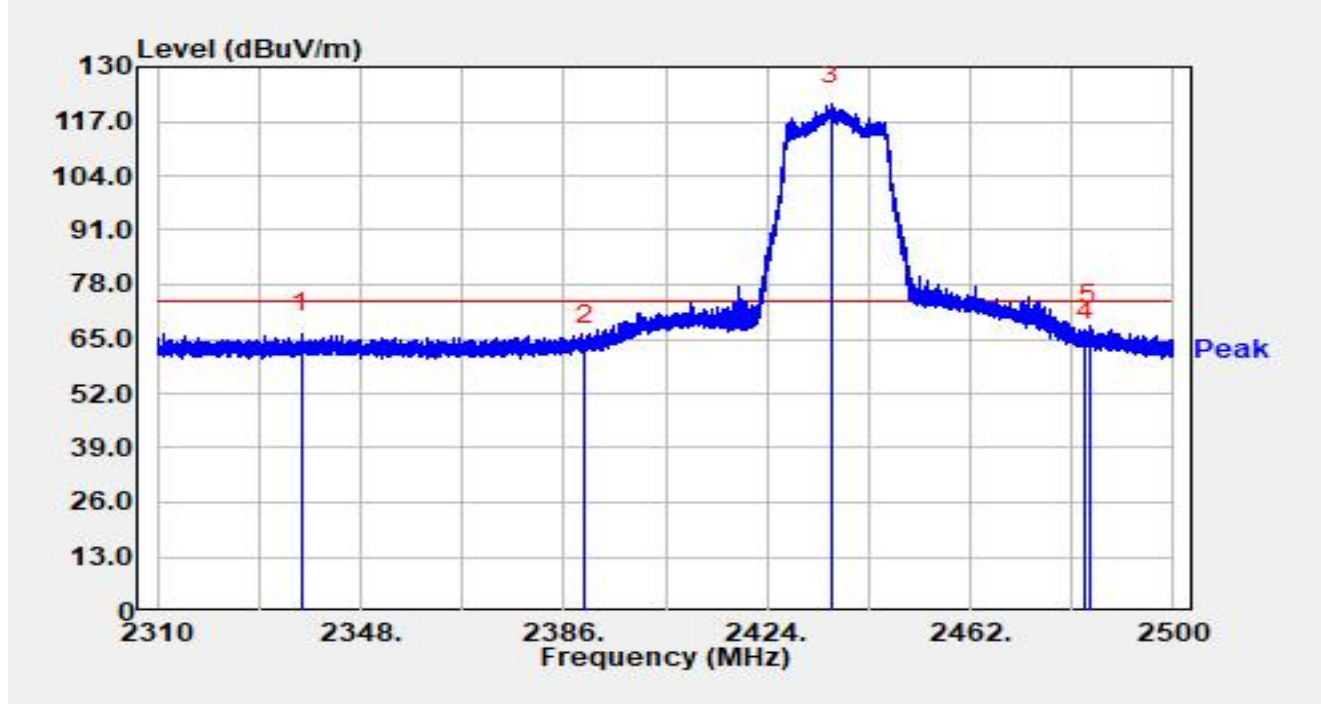


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2336.980	33.60	32.75	66.35	-7.65	74.00	Peak
2		2390.000	30.90	32.52	63.42	-10.58	74.00	Peak
3		2435.875	88.63	32.39	121.03	N/A	N/A	Peak
4		2483.500	32.30	32.40	64.70	-9.30	74.00	Peak
5	*	2484.249	35.94	32.40	68.34	-5.66	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2437MHz		

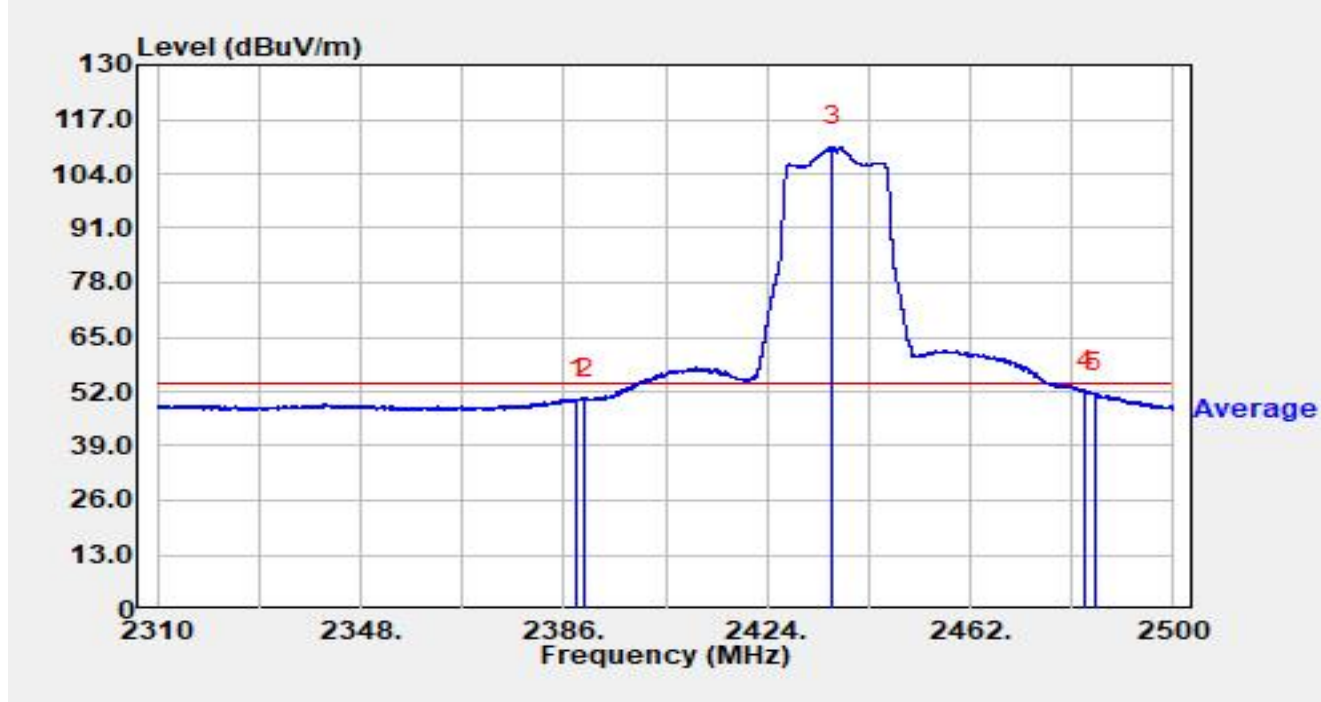


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.432	17.71	32.52	50.23	-3.77	54.00	Average
2		2390.000	17.56	32.52	50.08	-3.92	54.00	Average
3		2436.293	78.20	32.39	110.59	N/A	N/A	Average
4	*	2483.500	19.70	32.40	52.10	-1.90	54.00	Average
5		2485.180	19.20	32.40	51.60	-2.40	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

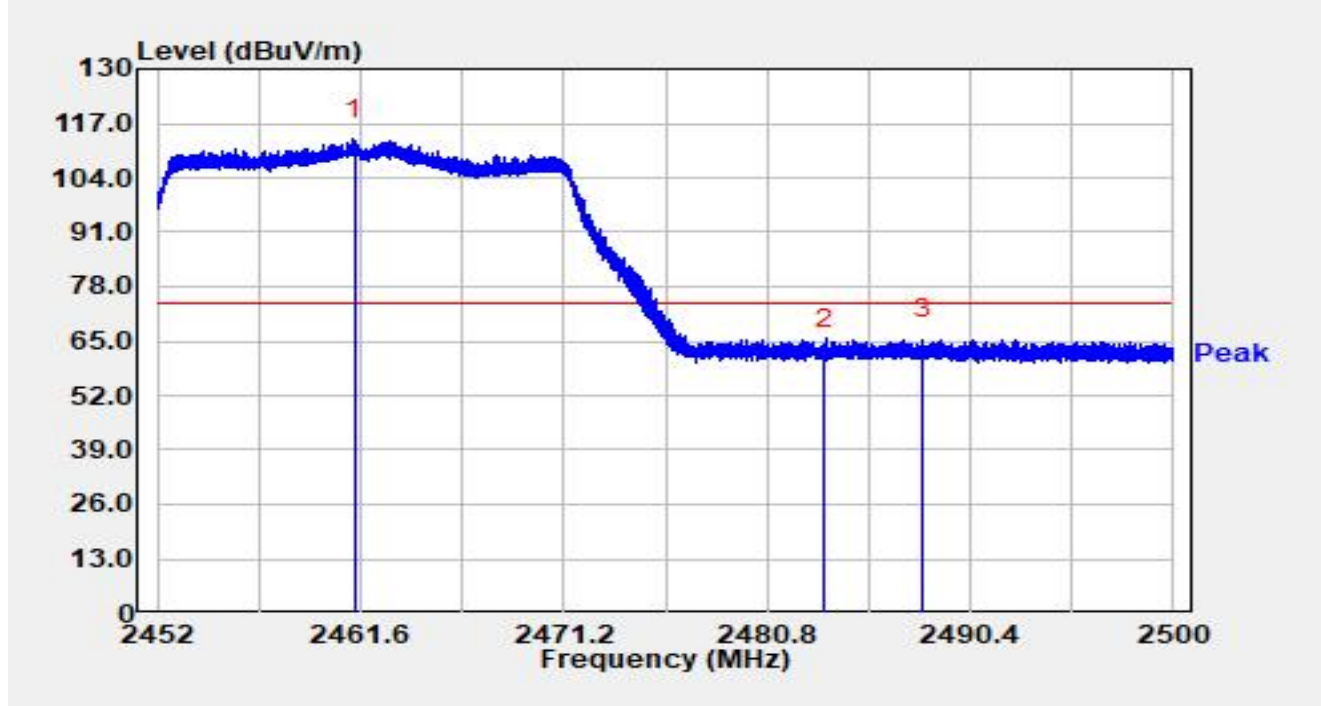


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.288	80.75	32.37	113.12	N/A	N/A	Peak
2		2483.500	30.56	32.40	62.96	-11.04	74.00	Peak
3	*	2488.187	32.91	32.39	65.30	-8.70	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

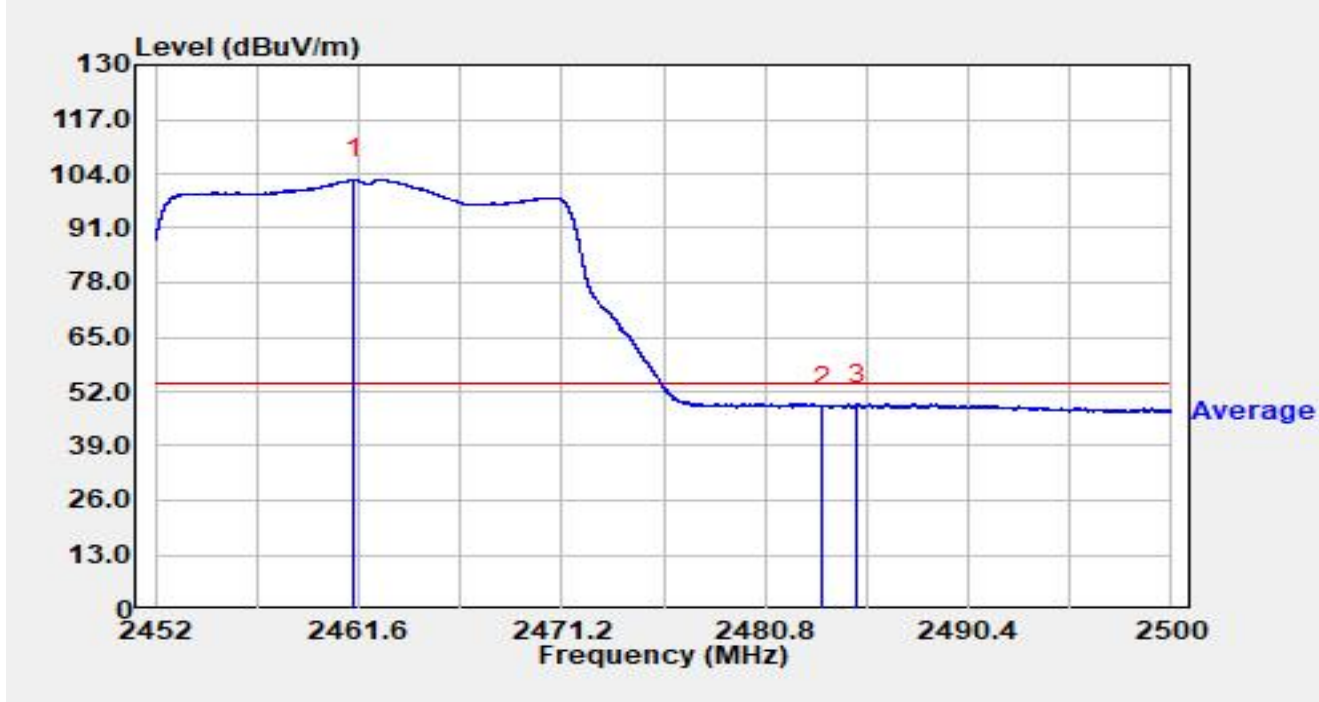


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.389	70.21	32.37	102.58	N/A	N/A	Average
2		2483.500	15.93	32.40	48.33	-5.67	54.00	Average
3	*	2485.168	16.55	32.40	48.94	-5.06	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

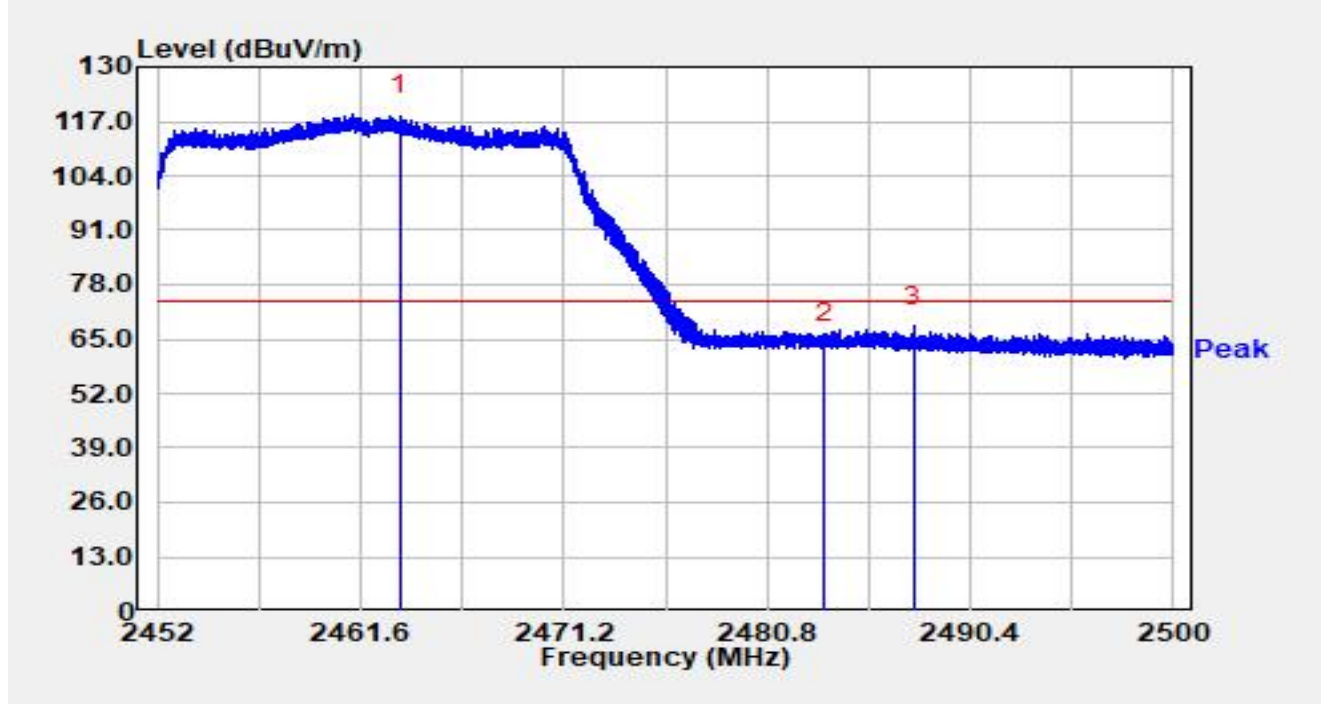


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.438	85.91	32.38	118.29	N/A	N/A	Peak
2		2483.500	31.60	32.40	64.00	-10.00	74.00	Peak
3	*	2487.698	35.78	32.39	68.17	-5.83	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

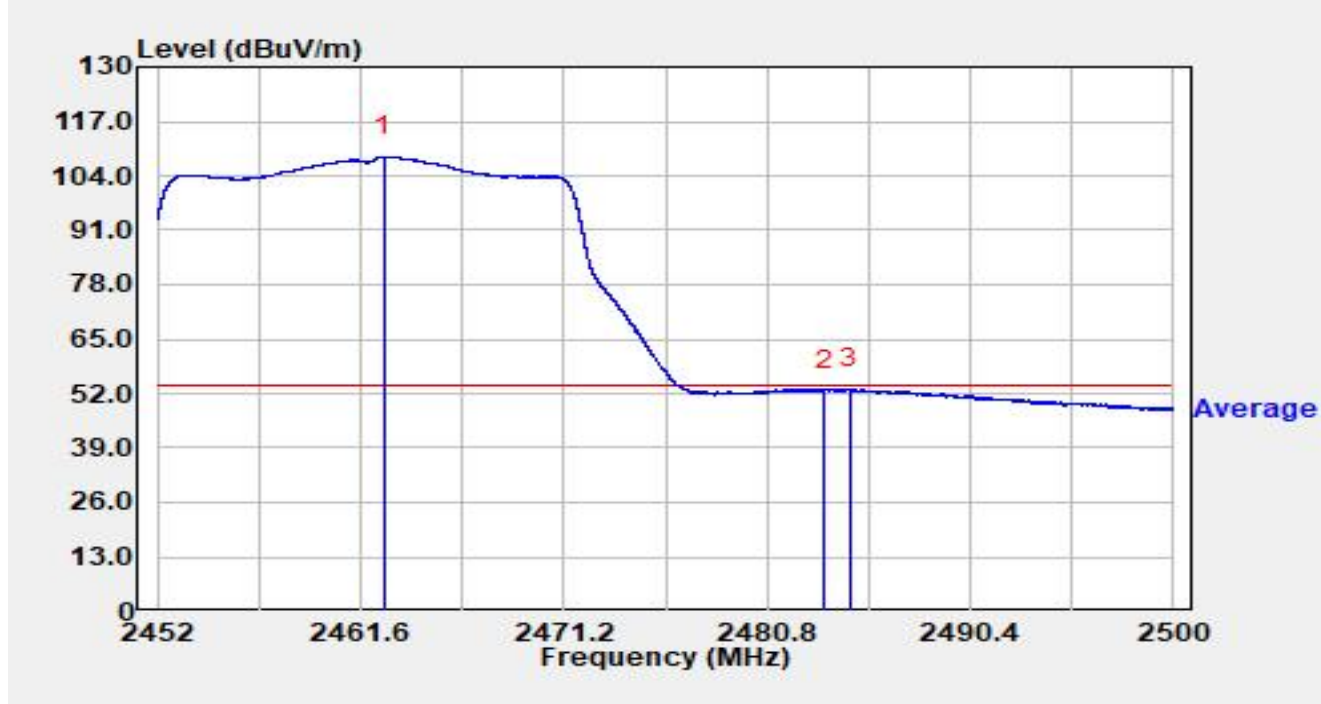


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.680	76.22	32.37	108.59	N/A	N/A	Average
2		2483.500	20.37	32.40	52.77	-1.23	54.00	Average
3	*	2484.688	20.79	32.40	53.18	-0.82	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

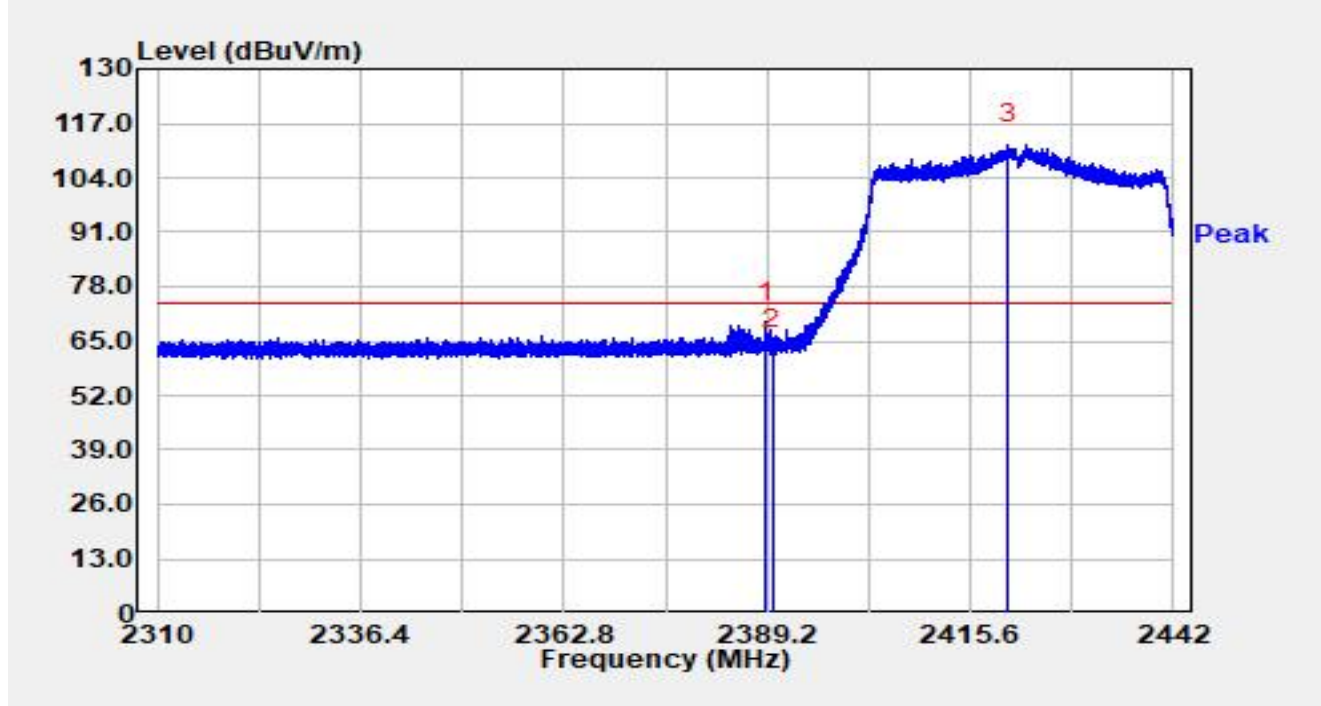


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.976	37.01	32.52	69.53	-4.47	74.00	Peak
2		2390.000	30.68	32.52	63.20	-10.80	74.00	Peak
3		2420.444	79.57	32.44	112.01	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

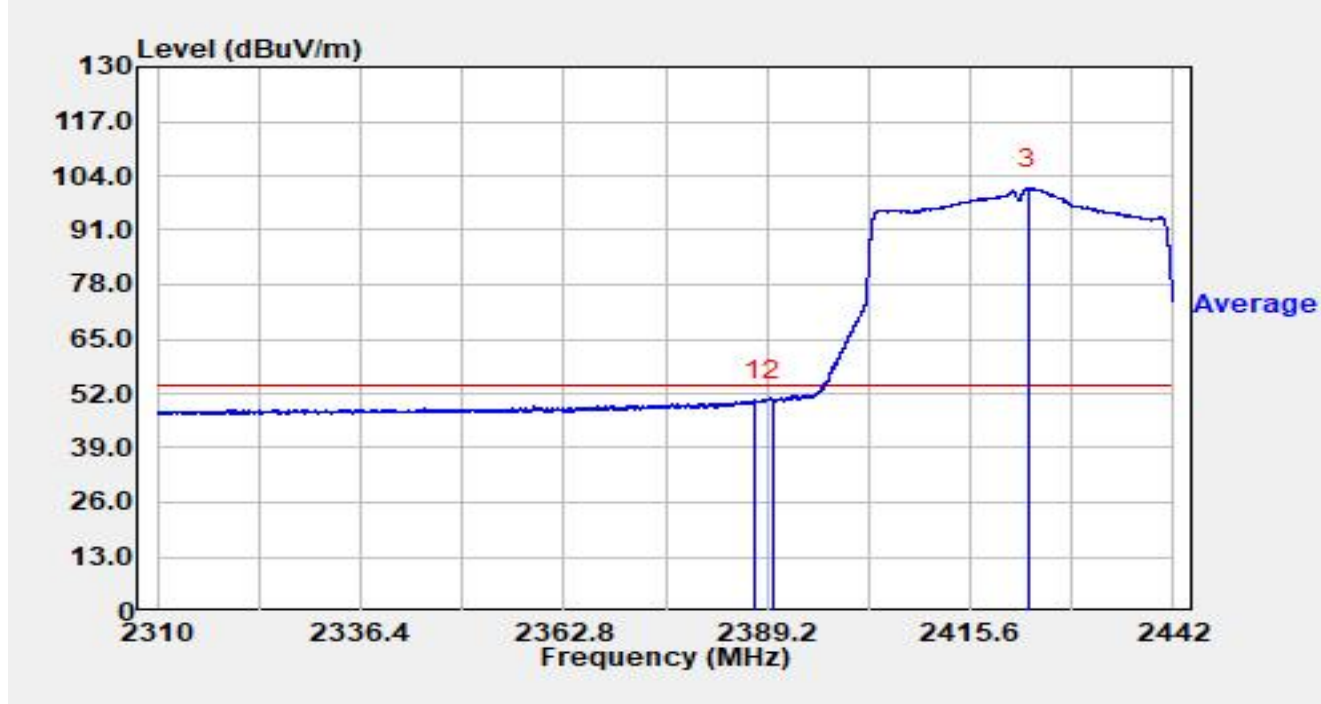


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.497	17.99	32.52	50.52	-3.48	54.00	Average
2		2390.000	17.96	32.52	50.48	-3.52	54.00	Average
3		2423.150	68.56	32.43	101.00	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

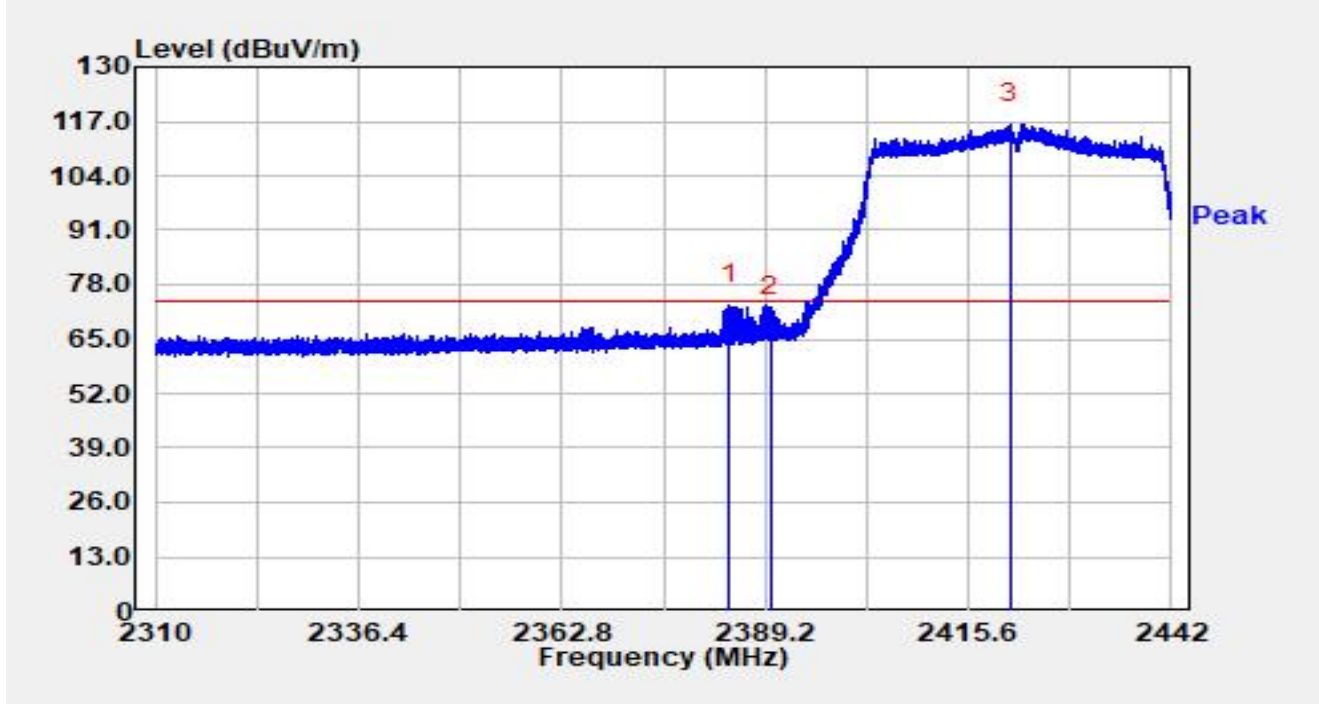


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.633	40.79	32.53	73.32	-0.68	74.00	Peak
2		2390.000	38.10	32.52	70.61	-3.39	74.00	Peak
3		2421.012	84.05	32.44	116.49	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

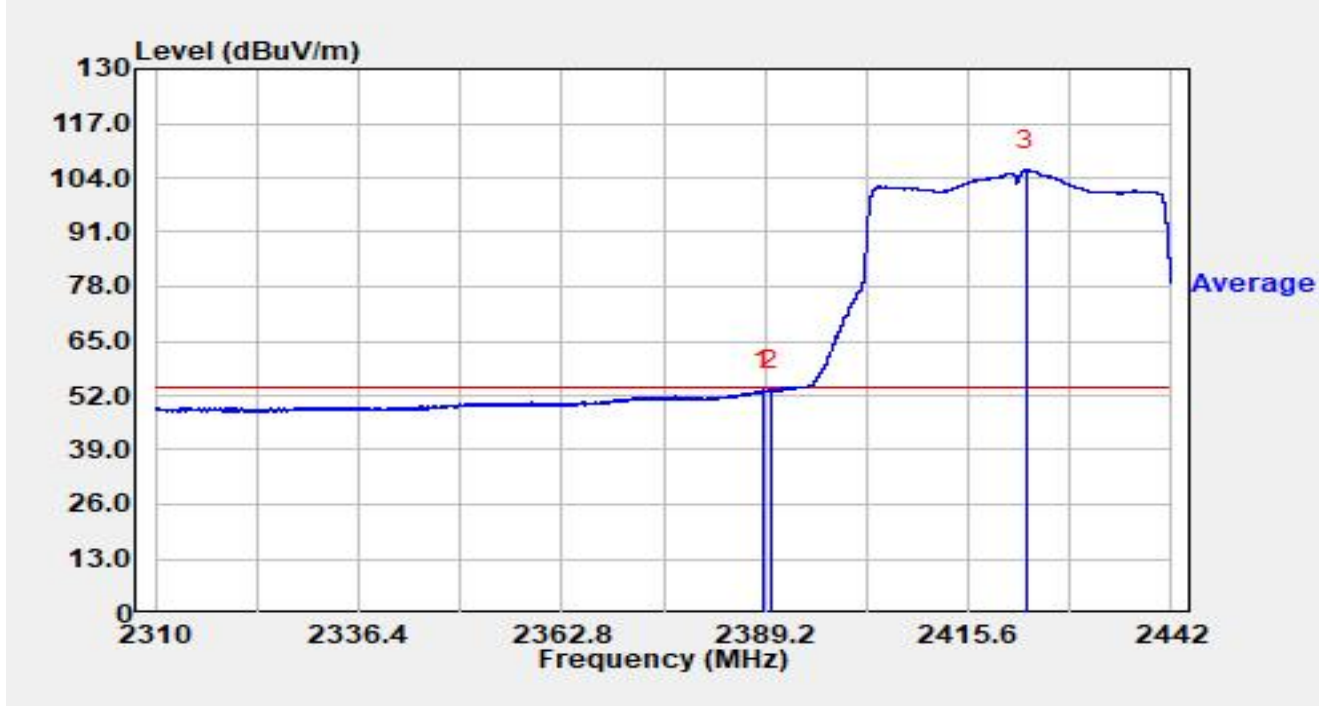


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2388.844	20.73	32.52	53.25	-0.75	54.00	Average
2	*	2390.000	20.77	32.52	53.28	-0.72	54.00	Average
3		2423.098	73.40	32.43	105.83	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

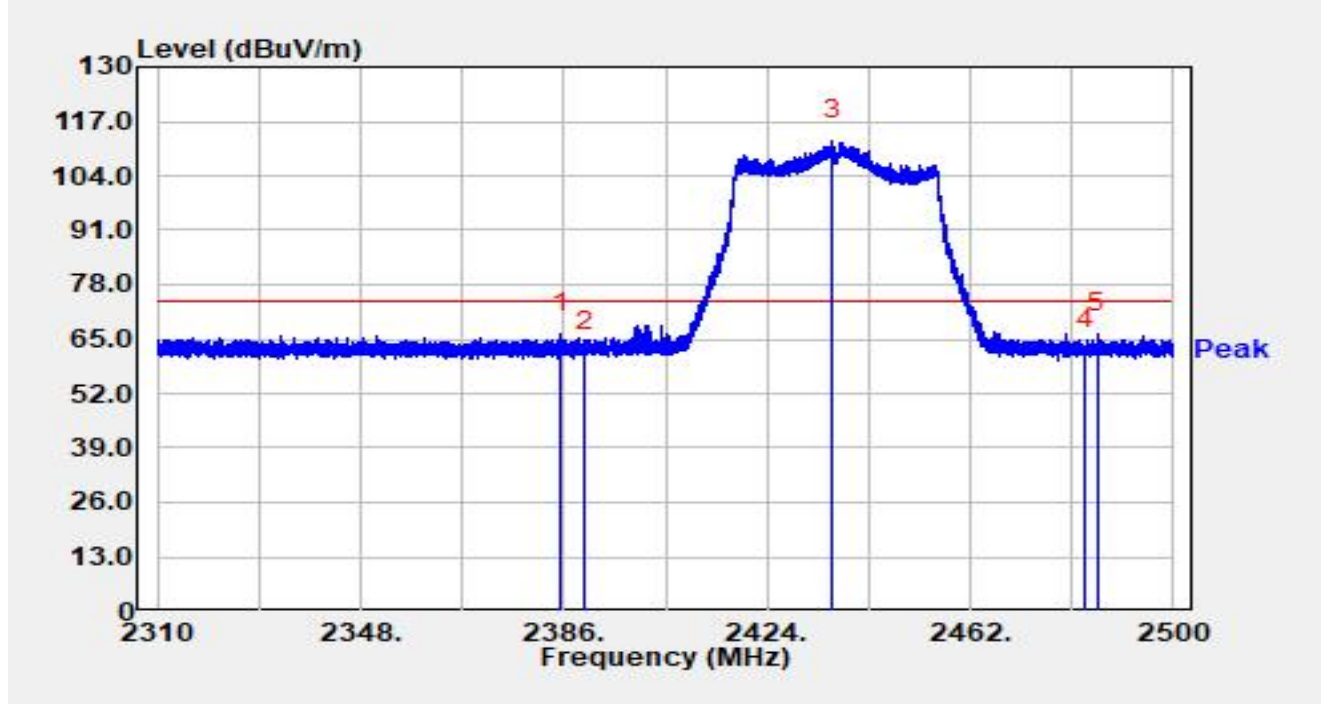


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.392	33.80	32.53	66.33	-7.67	74.00	Peak
2		2390.000	29.77	32.52	62.29	-11.71	74.00	Peak
3		2436.255	80.15	32.39	112.55	N/A	N/A	Peak
4		2483.500	30.00	32.40	62.40	-11.60	74.00	Peak
5		2485.712	33.86	32.40	66.26	-7.74	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

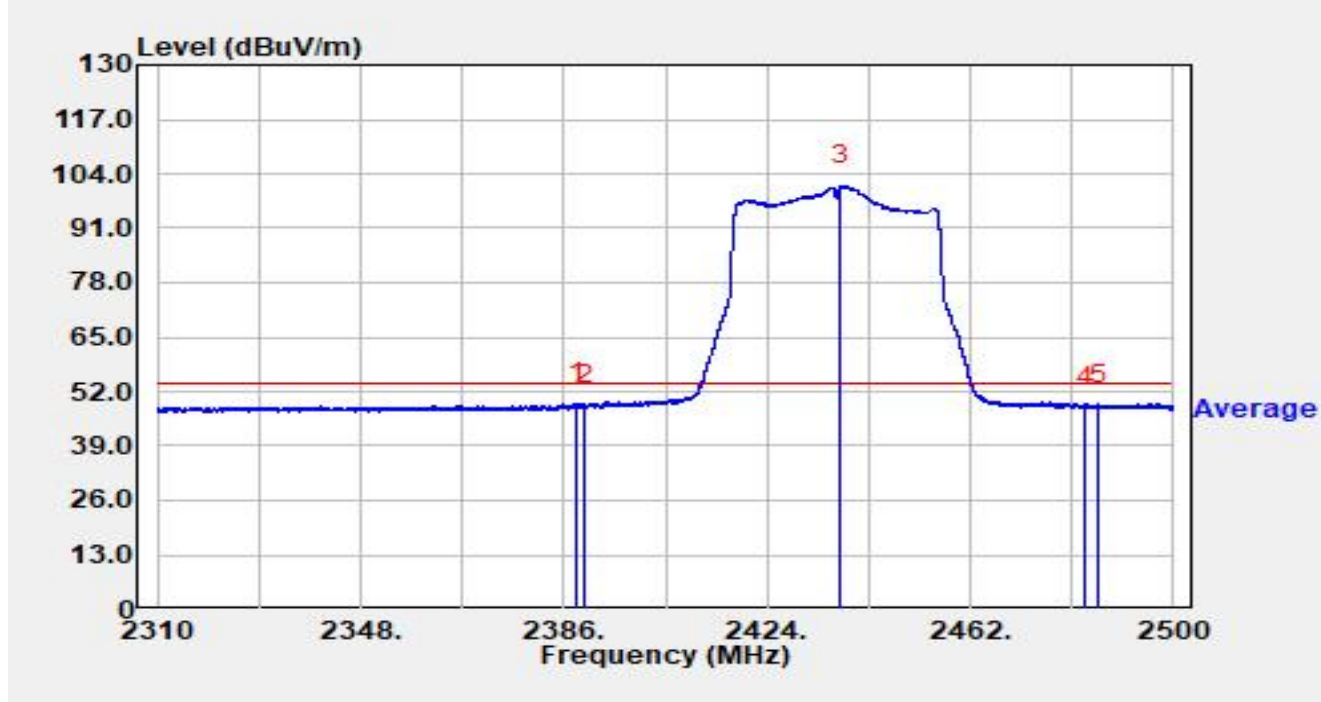


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.527	16.66	32.52	49.18	-4.82	54.00	Average
2		2390.000	16.07	32.52	48.59	-5.41	54.00	Average
3		2437.756	68.82	32.39	101.21	N/A	N/A	Average
4		2483.500	16.12	32.40	48.52	-5.48	54.00	Average
5		2486.092	16.42	32.40	48.81	-5.19	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

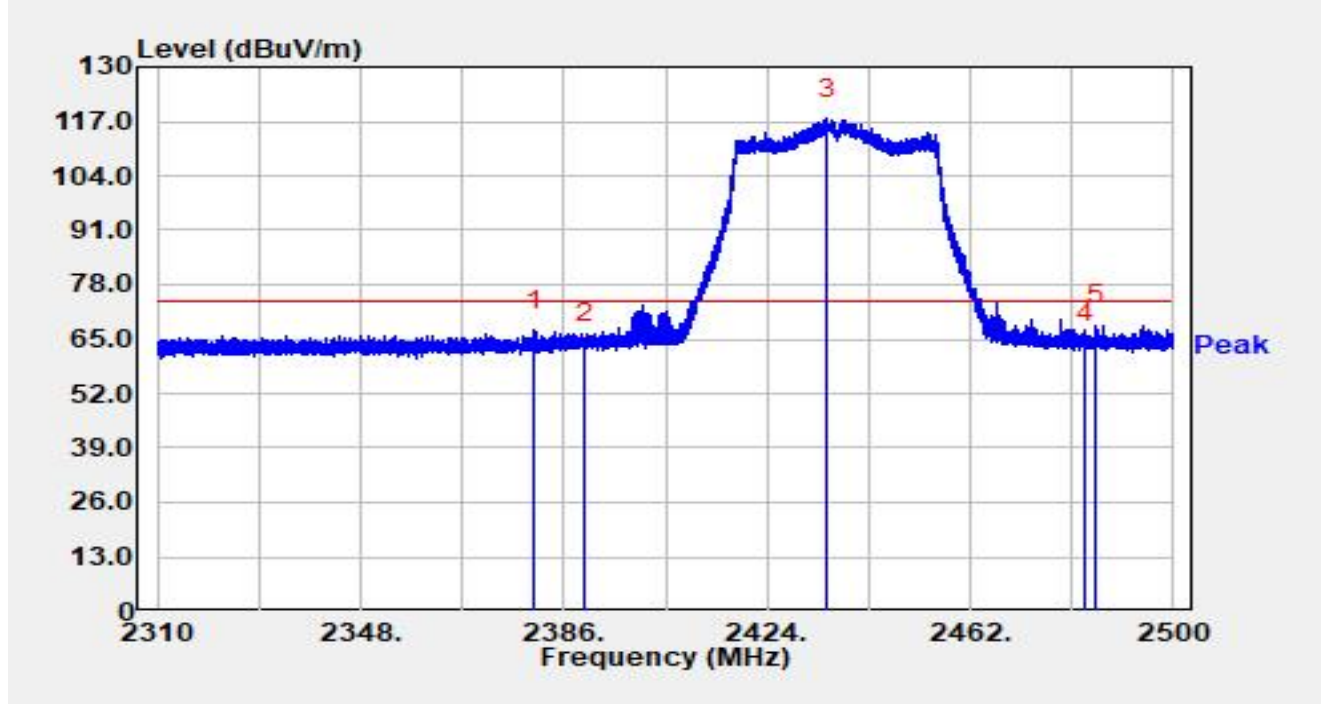


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2380.566	34.45	32.54	66.99	-7.01	74.00	Peak
2		2390.000	31.50	32.52	64.02	-9.98	74.00	Peak
3		2435.286	85.21	32.40	117.61	N/A	N/A	Peak
4		2483.500	31.52	32.40	63.92	-10.08	74.00	Peak
5	*	2485.617	35.82	32.40	68.21	-5.79	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2437MHz		

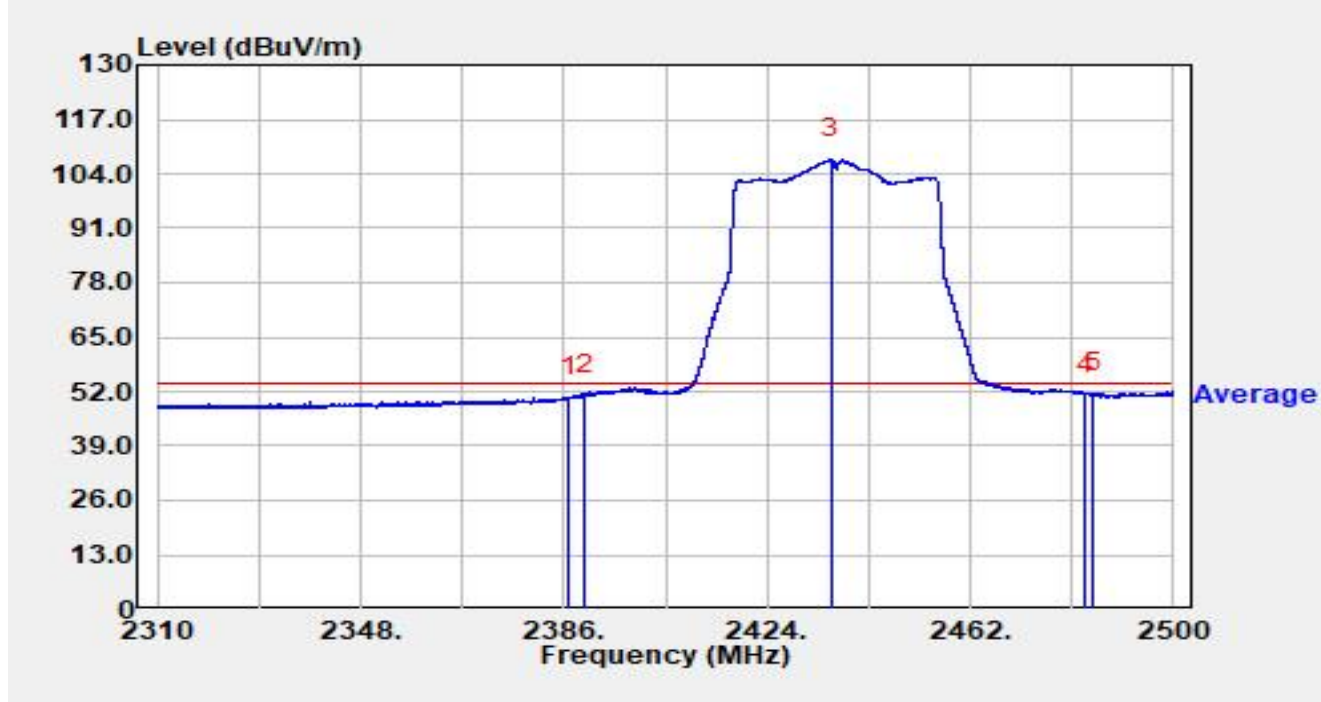


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2386.912	18.03	32.52	50.56	-3.44	54.00	Average
2		2390.000	18.72	32.52	51.24	-2.76	54.00	Average
3		2436.027	75.08	32.39	107.48	N/A	N/A	Average
4		2483.500	19.10	32.40	51.50	-2.50	54.00	Average
5	*	2484.895	19.25	32.40	51.65	-2.35	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

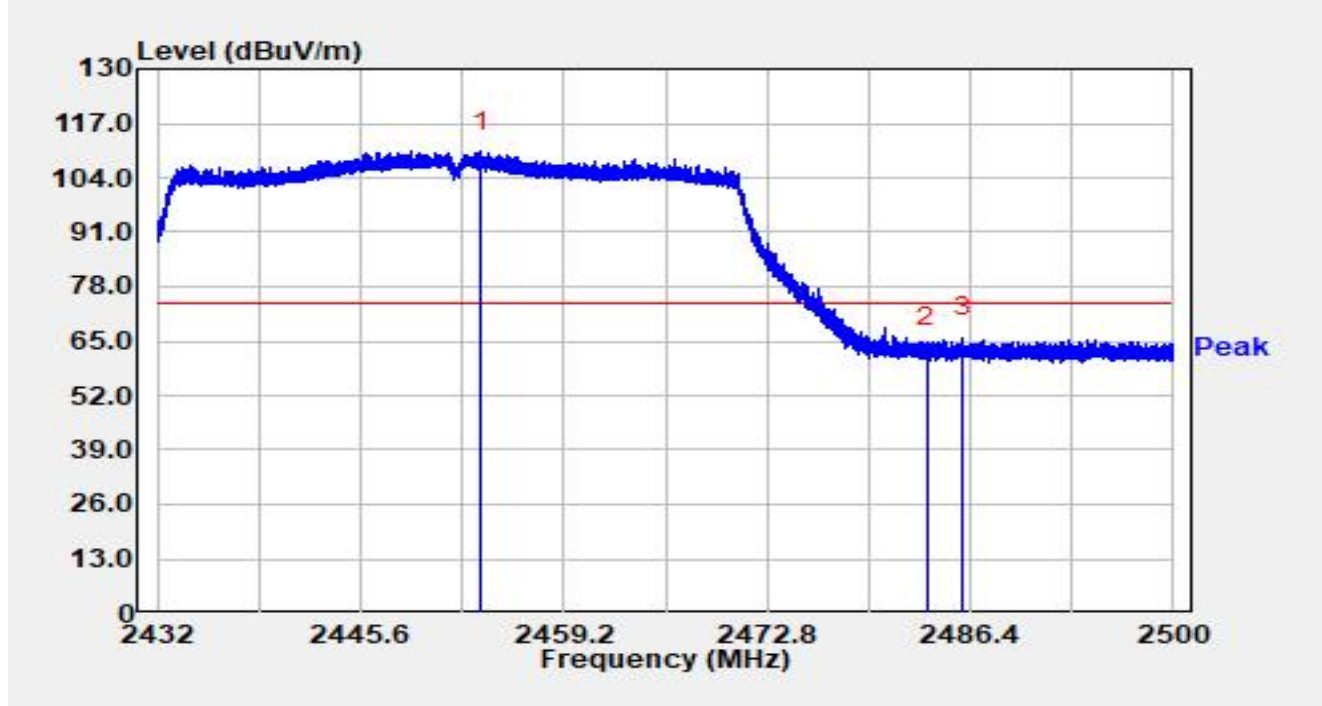


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.692	77.85	32.37	110.22	N/A	N/A	Peak
2		2483.500	30.89	32.40	63.29	-10.71	74.00	Peak
3	*	2485.931	33.36	32.40	65.75	-8.25	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

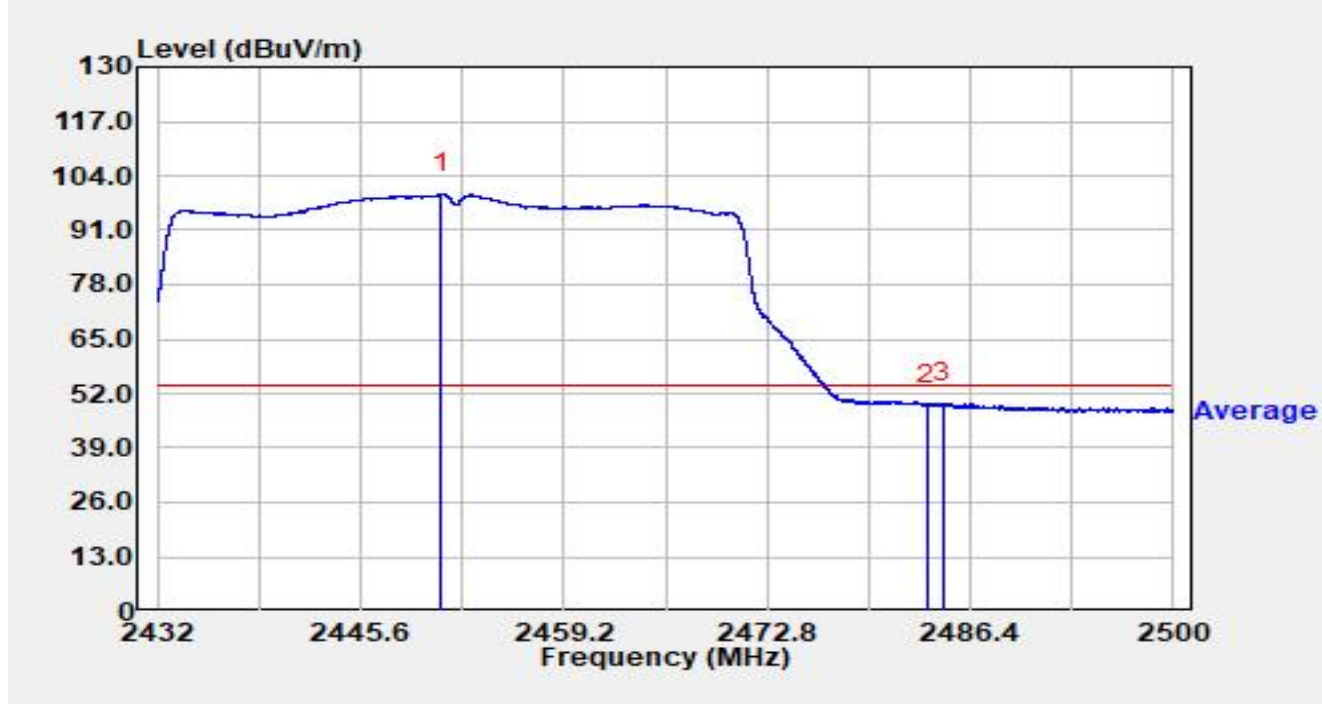


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2451.033	67.23	32.37	99.61	N/A	N/A	Average
2		2483.500	16.88	32.40	49.28	-4.72	54.00	Average
3	*	2484.612	17.16	32.40	49.56	-4.44	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

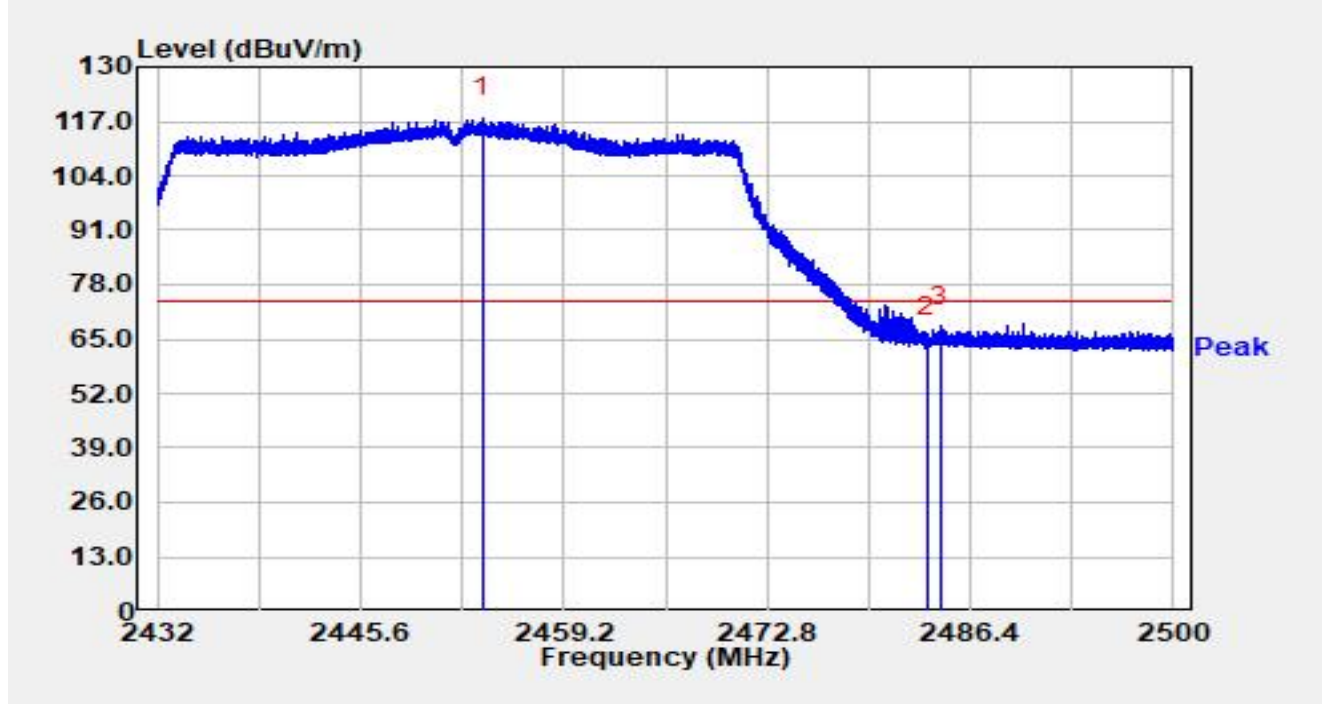


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.719	85.42	32.37	117.79	N/A	N/A	Peak
2		2483.500	33.19	32.40	65.59	-8.41	74.00	Peak
3	*	2484.360	35.67	32.40	68.07	-5.93	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-25
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

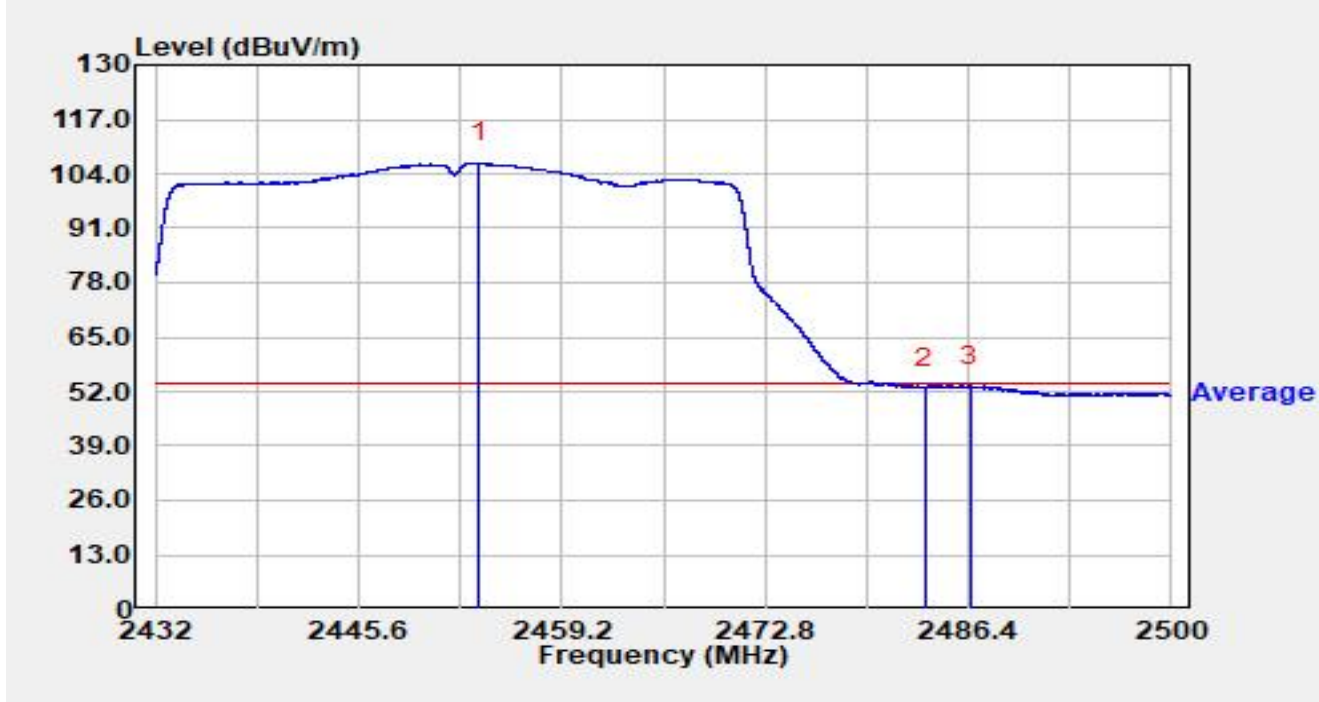


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.706	74.12	32.37	106.49	N/A	N/A	Average
2		2483.500	20.50	32.40	52.90	-1.10	54.00	Average
3	*	2486.516	20.94	32.39	53.34	-0.66	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-03-13
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_C	Polarity	Line1
EUT	Deco BE65-Outdoor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2437MHz		

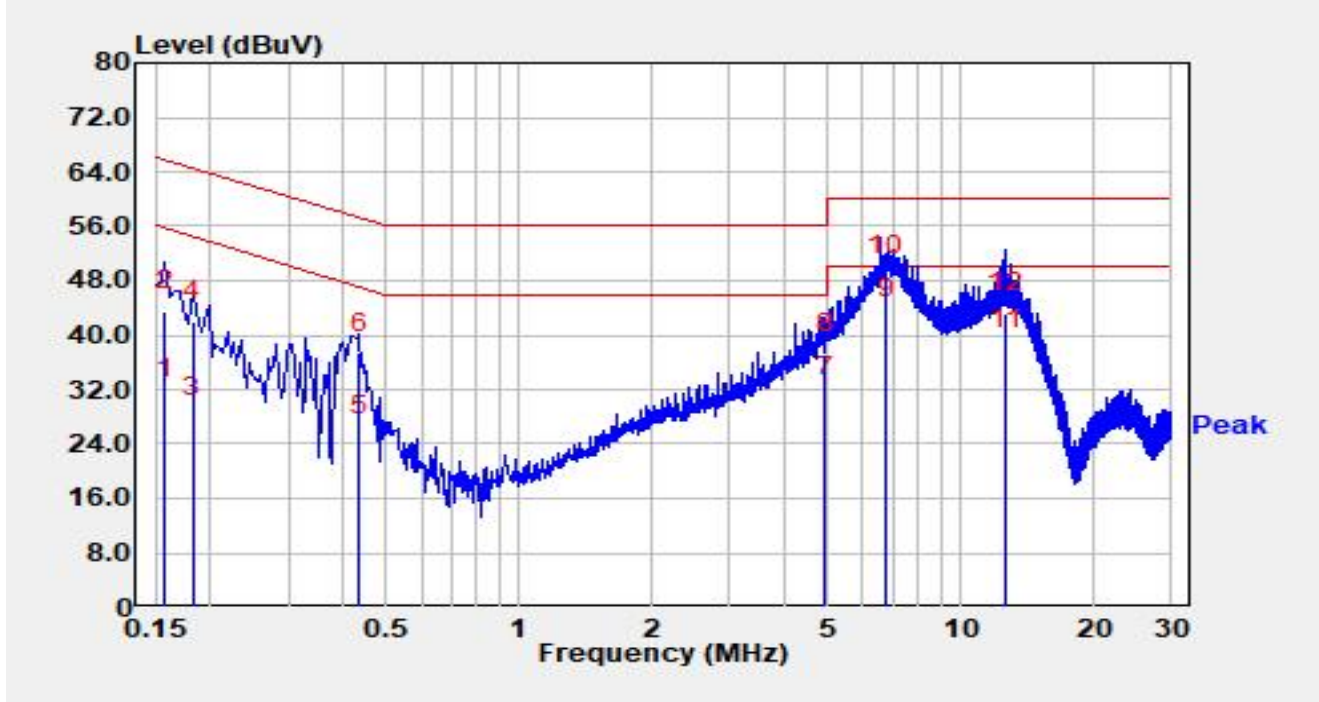


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.158	20.80	9.82	30.62	-24.95	55.57	Average
2		0.158	33.80	9.82	43.62	-21.95	65.57	QP
3		0.182	18.00	9.82	27.82	-26.58	54.39	Average
4		0.182	32.20	9.82	42.02	-22.38	64.39	QP
5		0.434	15.40	9.90	25.30	-21.88	47.18	Average
6		0.434	27.40	9.90	37.30	-19.88	57.18	QP
7		4.940	20.60	10.20	30.80	-15.20	46.00	Average
8		4.940	27.00	10.20	37.20	-18.80	56.00	QP
9	*	6.800	32.10	10.25	42.35	-7.65	50.00	Average
10		6.800	38.60	10.25	48.85	-11.15	60.00	QP
11		12.660	27.40	10.46	37.86	-12.14	50.00	Average
12		12.660	32.80	10.46	43.26	-16.74	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F \text{ (dB)} = LISN \text{ Factor (dB)} + \text{Cable Loss (dB)}$.
3. $\text{Measurement (dB}\mu\text{V)} = \text{Reading (dB}\mu\text{V)} + C.F \text{ (dB)}$.

Site	WZ-SR2	Test Date	2025-03-13
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_C	Polarity	Neutral
EUT	Deco BE65-Outdoor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2437MHz		

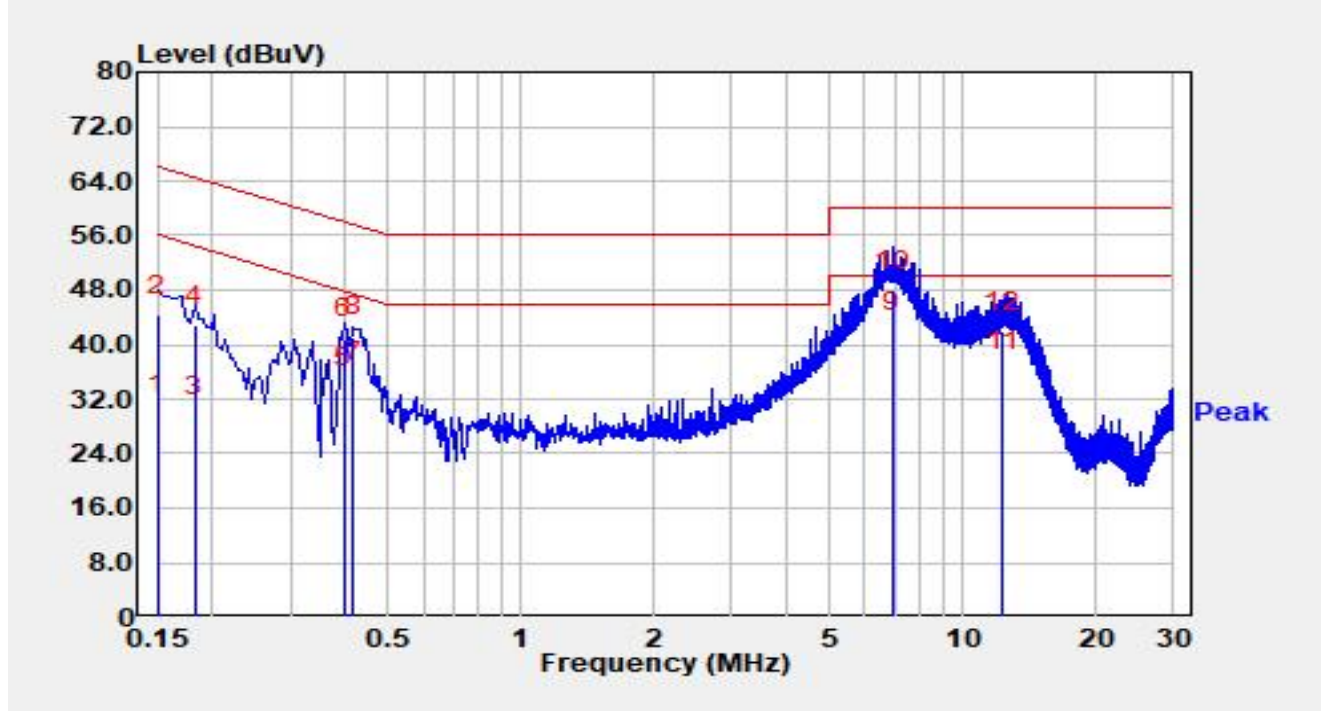

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	19.50	10.13	29.63	-26.37	56.00	Average
2		0.150	34.20	10.13	44.33	-21.67	66.00	QP
3		0.182	19.40	10.11	29.51	-24.88	54.39	Average
4		0.182	32.70	10.11	42.81	-21.58	64.39	QP
5		0.398	23.40	10.13	33.53	-14.36	47.90	Average
6		0.398	30.70	10.13	40.83	-17.06	57.90	QP
7		0.418	24.30	10.14	34.44	-13.05	47.49	Average
8		0.418	31.00	10.14	41.14	-16.35	57.49	QP
9	*	6.950	31.30	10.51	41.81	-8.19	50.00	Average
10		6.950	37.40	10.51	47.91	-12.09	60.00	QP
11		12.340	25.40	10.71	36.11	-13.89	50.00	Average
12		12.340	31.20	10.71	41.91	-18.09	60.00	QP

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).

3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1008026-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1008026-UE” file.

The End
