


802.11be-EHT20 In-Band Emission - Ant 1

Channel 33 (6115MHz)




Channel 61 (6255MHz)

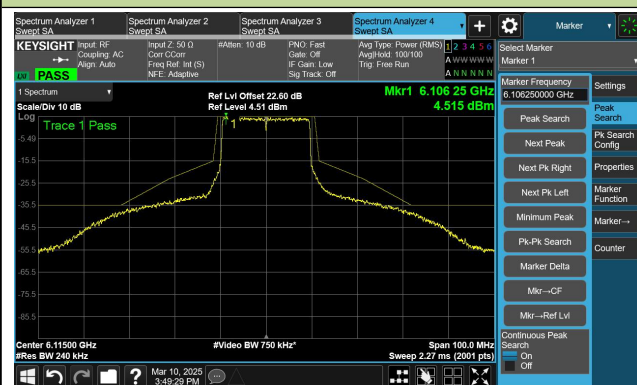


Channel 93 (6415MHz)




Channel 117 (6535MHz)

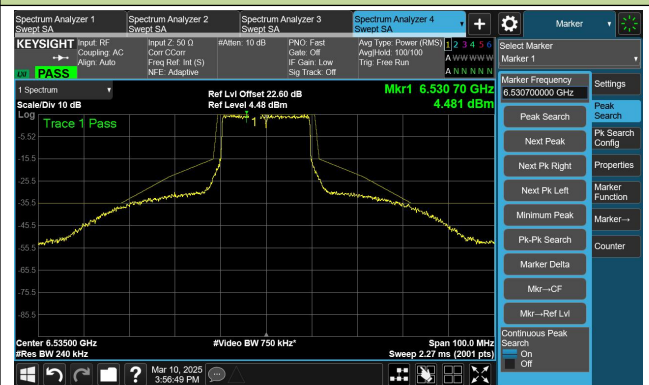

Channel 149 (6695MHz)

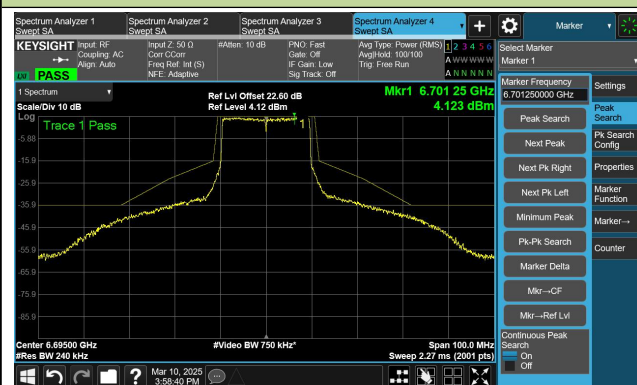


Channel 181 (6855MHz)

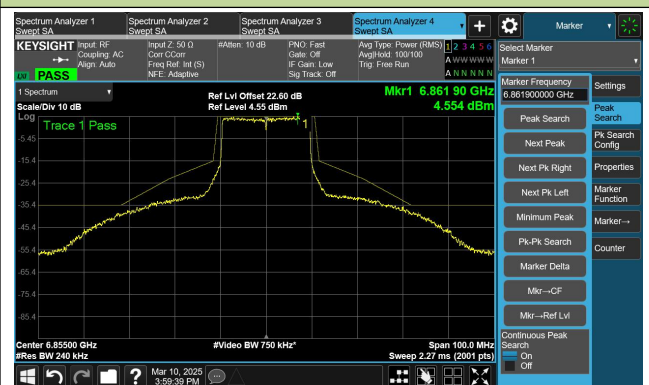


802.11be-EHT40 In-Band Emission - Ant 1


Channel 36 (6125MHz)

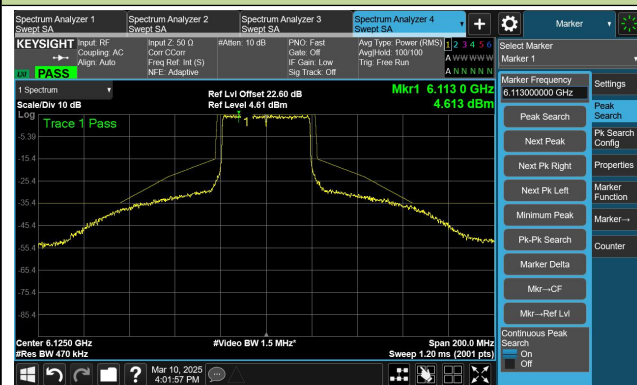


Channel 59 (6245MHz)

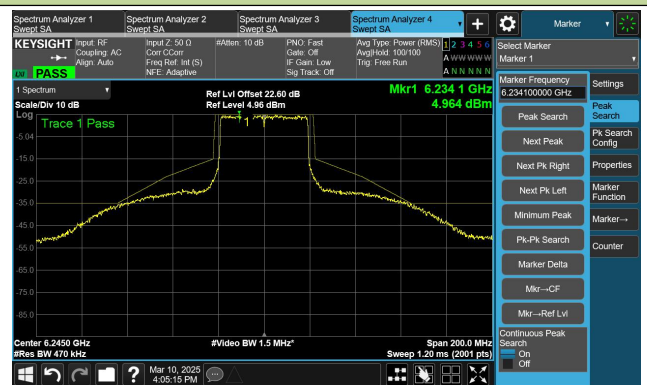

Channel 91 (6405MHz)

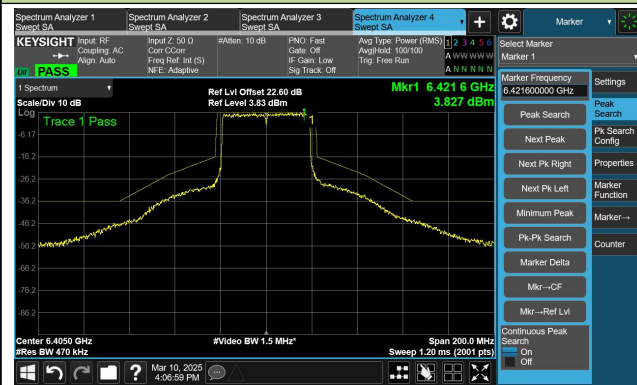

Channel 123 (6565MHz)

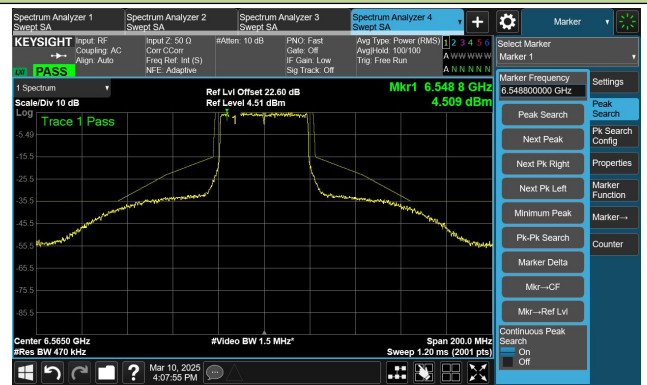

Channel 147 (6685MHz)



Channel 179 (6845MHz)




802.11be-EHT80 In-Band Emission - Ant 1

Channel 39 (6145MHz)



Channel 55 (6225MHz)

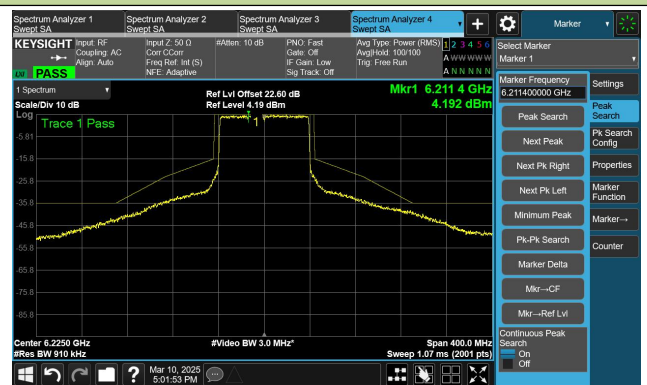

Channel 87 (6385MHz)



Channel 135 (6625MHz)



Channel 151 (6705MHz)



Channel 167 (6785MHz)



802.11be-EHT160 In-Band Emission - Ant 1


Channel 47 (6185MHz)



Channel 79 (6345MHz)



Channel 143 (6665MHz)

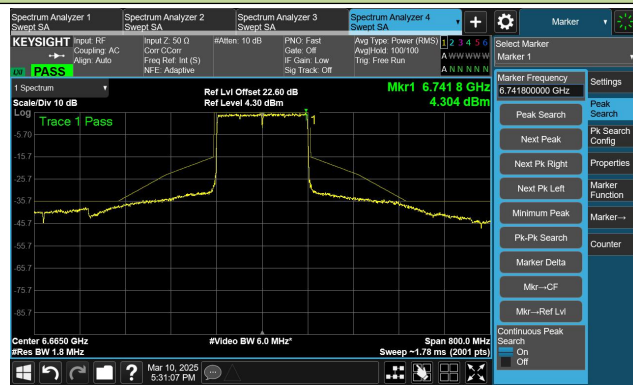

802.11be-EHT320 In-Band Emission - Ant 1

Channel 63 (6265MHz)



A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Jeff Yang
Test Date	2025-03-11		
Test Mode	6115MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	9.64	9.23	8.96	8.78
		- 20	9.35	9.74	10.09	10.15
		- 10	10.21	10.08	9.71	9.47
		0	9.20	8.47	8.05	7.72
		+ 10	7.48	6.72	5.42	5.21
		+ 20	4.07	3.39	2.37	1.21
		+ 30	-0.14	-0.71	-2.06	-3.27
		+ 40	-4.92	-5.27	-6.54	-7.47
		+ 50	-8.40	-9.17	-10.35	-11.27
115	138	+ 20	4.65	3.81	2.87	1.61
85	102	+ 20	4.29	3.61	2.58	1.40

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

A.7 Radiated Spurious Emission Test Result

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE20	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10309.2	34.3	15.0	49.3	88.2	-38.9	Peak	Horizontal
	12221.7	36.2	12.9	49.1	54.0	-4.9	Average	Horizontal
	12221.7	42.0	12.9	54.9	74.0	-19.1	Peak	Horizontal
*	16838.9	36.0	15.0	51.0	88.2	-37.2	Peak	Horizontal
	17993.2	22.3	22.8	45.1	54.0	-8.9	Average	Horizontal
	17993.2	34.0	22.8	56.8	74.0	-17.2	Peak	Horizontal
*	9931.8	35.0	14.5	49.5	88.2	-38.7	Peak	Vertical
	12223.4	31.3	12.8	44.1	54.0	-9.9	Average	Vertical
	12223.4	39.7	12.8	52.5	74.0	-21.5	Peak	Vertical
*	17000.4	36.6	15.3	51.9	88.2	-36.3	Peak	Vertical
	18000.0	22.9	22.9	45.8	54.0	-8.2	Average	Vertical
	18000.0	33.3	22.9	56.2	74.0	-17.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE20	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9923.3	35.0	14.5	49.5	88.2	-38.7	Peak	Horizontal
	12507.3	35.5	12.4	47.9	54.0	-6.1	Average	Horizontal
	12507.3	42.8	12.4	55.2	74.0	-18.8	Peak	Horizontal
*	17002.1	35.9	15.4	51.3	88.2	-36.9	Peak	Horizontal
	17994.9	23.1	22.8	45.9	54.0	-8.1	Average	Horizontal
	17994.9	34.8	22.8	57.6	74.0	-16.4	Peak	Horizontal
*	10253.1	34.5	14.8	49.3	88.2	-38.9	Peak	Vertical
	12503.9	30.6	12.4	43.0	54.0	-11.0	Average	Vertical
	12503.9	39.8	12.4	52.2	74.0	-21.8	Peak	Vertical
*	16978.3	36.1	15.4	51.5	88.2	-36.7	Peak	Vertical
	17983.0	18.2	22.7	40.9	54.0	-13.1	Average	Vertical
	17983.0	35.7	22.7	58.4	74.0	-15.6	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11291.8	36.4	14.4	50.8	74.0	-23.2	Peak	Horizontal
*	12826.9	39.8	13.0	52.8	88.2	-35.4	Peak	Horizontal
*	16787.9	35.2	14.9	50.1	88.2	-38.1	Peak	Horizontal
	17955.8	22.7	22.1	44.8	54.0	-9.2	Average	Horizontal
	17955.8	35.5	22.1	57.6	74.0	-16.4	Peak	Horizontal
	11222.1	35.4	14.4	49.8	74.0	-24.2	Peak	Vertical
*	12832.0	40.1	13.0	53.1	88.2	-35.1	Peak	Vertical
*	16731.8	35.7	14.7	50.4	88.2	-37.8	Peak	Vertical
	17984.7	23.3	22.7	46.0	54.0	-8.0	Average	Vertical
	17984.7	34.7	22.7	57.4	74.0	-16.6	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10747.8	35.5	15.1	50.6	74.0	-23.4	Peak	Horizontal
*	13070.0	41.1	13.0	54.1	88.2	-34.1	Peak	Horizontal
*	17027.6	36.1	15.6	51.7	88.2	-36.5	Peak	Horizontal
	17988.1	23.2	22.8	46.0	54.0	-8.0	Average	Horizontal
	17988.1	34.7	22.8	57.5	74.0	-16.5	Peak	Horizontal
	10996.0	34.6	15.1	49.7	74.0	-24.3	Peak	Vertical
*	13071.7	42.0	13.1	55.1	88.2	-33.1	Peak	Vertical
*	16983.4	35.9	15.3	51.2	88.2	-37.0	Peak	Vertical
	17989.8	23.1	22.8	45.9	54.0	-8.1	Average	Vertical
	17989.8	34.4	22.8	57.2	74.0	-16.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9960.7	35.1	14.2	49.3	88.2	-38.9	Peak	Horizontal
	13393.0	36.0	13.6	49.6	54.0	-4.4	Average	Horizontal
	13393.0	41.7	13.6	55.3	74.0	-18.7	Peak	Horizontal
*	17090.5	35.6	15.4	51.0	88.2	-37.2	Peak	Horizontal
	17993.2	22.7	22.8	45.5	54.0	-8.5	Average	Horizontal
	17993.2	34.9	22.8	57.7	74.0	-16.3	Peak	Horizontal
*	10112.0	36.4	14.4	50.8	88.2	-37.4	Peak	Vertical
	13386.2	37.1	13.5	50.6	54.0	-3.4	Average	Vertical
	13386.2	44.5	13.5	58.0	74.0	-16.0	Peak	Vertical
*	16995.3	36.8	15.2	52.0	88.2	-36.2	Peak	Vertical
	17986.4	23.3	22.7	46.0	54.0	-8.0	Average	Vertical
	17986.4	34.5	22.7	57.2	74.0	-16.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9790.7	35.5	14.4	49.9	88.2	-38.3	Peak	Horizontal
	10962.0	34.5	15.1	49.6	74.0	-24.4	Peak	Horizontal
*	16818.5	37.4	14.8	52.2	88.2	-36.0	Peak	Horizontal
	17988.1	23.1	22.8	45.9	54.0	-8.1	Average	Horizontal
	17988.1	35.3	22.8	58.1	74.0	-15.9	Peak	Horizontal
*	9965.8	35.5	14.3	49.8	88.2	-38.4	Peak	Vertical
	11081.0	34.9	14.7	49.6	74.0	-24.4	Peak	Vertical
*	13707.5	44.3	14.0	58.3	88.2	-29.9	Peak	Vertical
	17974.5	23.2	22.4	45.6	54.0	-8.4	Average	Vertical
	17974.5	34.5	22.4	56.9	74.0	-17.1	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE40	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9931.8	34.9	14.5	49.4	88.2	-38.8	Peak	Horizontal
	12243.8	35.1	12.8	47.9	54.0	-6.1	Average	Horizontal
	12243.8	40.8	12.8	53.6	74.0	-20.4	Peak	Horizontal
*	17075.2	36.9	15.5	52.4	88.2	-35.8	Peak	Horizontal
	17894.6	23.2	21.5	44.7	54.0	-9.3	Average	Horizontal
	17894.6	35.2	21.5	56.7	74.0	-17.3	Peak	Horizontal
*	10518.3	35.6	15.2	50.8	88.2	-37.4	Peak	Vertical
	12242.1	37.9	12.8	50.7	74.0	-23.3	Peak	Vertical
*	17049.7	36.1	15.0	51.1	88.2	-37.1	Peak	Vertical
	17993.2	23.3	22.8	46.1	54.0	-7.9	Average	Vertical
	17993.2	35.1	22.8	57.9	74.0	-16.1	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE40	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9838.3	35.7	14.4	50.1	88.2	-38.1	Peak	Horizontal
	12488.6	34.6	12.4	47.0	54.0	-7.0	Average	Horizontal
	12488.6	40.8	12.4	53.2	74.0	-20.8	Peak	Horizontal
*	17150.0	36.6	15.3	51.9	88.2	-36.3	Peak	Horizontal
	17981.3	23.1	22.7	45.8	54.0	-8.2	Average	Horizontal
	17981.3	34.7	22.7	57.4	74.0	-16.6	Peak	Horizontal
*	9926.7	35.8	14.5	50.3	88.2	-37.9	Peak	Vertical
	11361.5	35.5	14.4	49.9	74.0	-24.1	Peak	Vertical
*	16978.3	37.2	15.4	52.6	88.2	-35.6	Peak	Vertical
	17989.8	23.3	22.8	46.1	54.0	-7.9	Average	Vertical
	17989.8	35.2	22.8	58.0	74.0	-16.0	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10934.8	35.2	15.2	50.4	74.0	-23.6	Peak	Horizontal
*	12806.5	39.3	12.9	52.2	88.2	-36.0	Peak	Horizontal
*	17065.0	36.8	15.2	52.0	88.2	-36.2	Peak	Horizontal
	17969.4	23.0	22.3	45.3	54.0	-8.7	Average	Horizontal
	17969.4	35.6	22.3	57.9	74.0	-16.1	Peak	Horizontal
	10996.0	35.2	15.1	50.3	74.0	-23.7	Peak	Vertical
*	12811.6	38.8	13.0	51.8	88.2	-36.4	Peak	Vertical
*	16976.6	37.3	15.4	52.7	88.2	-35.5	Peak	Vertical
	17981.3	22.7	22.7	45.4	54.0	-8.6	Average	Vertical
	17981.3	34.8	22.7	57.5	74.0	-16.5	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11466.9	36.3	14.3	50.6	74.0	-23.4	Peak	Horizontal
*	13124.4	38.6	12.9	51.5	88.2	-36.7	Peak	Horizontal
*	16964.7	36.1	15.2	51.3	88.2	-36.9	Peak	Horizontal
	17991.5	22.9	22.8	45.7	54.0	-8.3	Average	Horizontal
	17991.5	34.9	22.8	57.7	74.0	-16.3	Peak	Horizontal
	11099.7	35.6	14.6	50.2	74.0	-23.8	Peak	Vertical
*	13131.2	42.6	12.9	55.5	88.2	-32.7	Peak	Vertical
*	16946.0	36.0	15.1	51.1	88.2	-37.1	Peak	Vertical
	17957.5	23.0	22.1	45.1	54.0	-8.9	Average	Vertical
	17957.5	35.1	22.1	57.2	74.0	-16.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9858.7	35.3	14.4	49.7	88.2	-38.5	Peak	Horizontal
	13374.3	35.2	13.4	48.6	54.0	-5.4	Average	Horizontal
	13374.3	40.3	13.4	53.7	74.0	-20.3	Peak	Horizontal
*	17003.8	36.5	15.4	51.9	88.2	-36.3	Peak	Horizontal
	17949.0	23.1	22.0	45.1	54.0	-8.9	Average	Horizontal
	17949.0	35.8	22.0	57.8	74.0	-16.2	Peak	Horizontal
*	9935.2	35.8	14.5	50.3	88.2	-37.9	Peak	Vertical
	13369.2	36.2	13.4	49.6	54.0	-4.4	Average	Vertical
	13369.2	42.1	13.4	55.5	74.0	-18.5	Peak	Vertical
*	17056.5	36.9	15.1	52.0	88.2	-36.2	Peak	Vertical
	18000.0	22.7	22.9	45.6	54.0	-8.4	Average	Vertical
	18000.0	34.6	22.9	57.5	74.0	-16.5	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10960.3	35.1	15.2	50.3	74.0	-23.7	Peak	Horizontal
*	13688.8	38.3	14.0	52.3	88.2	-35.9	Peak	Horizontal
*	17044.6	37.2	15.1	52.3	88.2	-35.9	Peak	Horizontal
	18000.0	22.8	22.9	45.7	54.0	-8.3	Average	Horizontal
	18000.0	34.4	22.9	57.3	74.0	-16.7	Peak	Horizontal
	10633.9	34.8	15.2	50.0	74.0	-24.0	Peak	Vertical
*	13688.8	36.7	14.0	50.7	88.2	-37.5	Peak	Vertical
*	16934.1	36.2	15.3	51.5	88.2	-36.7	Peak	Vertical
	17962.6	22.7	22.1	44.8	54.0	-9.2	Average	Vertical
	17962.6	35.6	22.1	57.7	74.0	-16.3	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE80	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9930.1	35.1	14.5	49.6	88.2	-38.6	Peak	Horizontal
	12318.6	35.1	12.6	47.7	54.0	-6.3	Average	Horizontal
	12318.6	39.9	12.6	52.5	74.0	-21.5	Peak	Horizontal
*	17020.8	36.3	15.5	51.8	88.2	-36.4	Peak	Horizontal
	17974.5	22.7	22.4	45.1	54.0	-8.9	Average	Horizontal
	17974.5	35.3	22.4	57.7	74.0	-16.3	Peak	Horizontal
	12281.2	37.5	12.7	50.2	74.0	-23.8	Peak	Vertical
*	14457.2	36.3	15.8	52.1	88.2	-36.1	Average	Vertical
*	16782.8	36.2	14.9	51.1	88.2	-37.1	Peak	Vertical
	17950.7	23.4	22.0	45.4	54.0	-8.6	Average	Vertical
	17950.7	35.8	22.0	57.8	74.0	-16.2	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10103.5	35.7	14.4	50.1	88.2	-38.1	Peak	Horizontal
	12444.4	33.3	12.4	45.7	54.0	-8.3	Average	Horizontal
	12444.4	39.3	12.4	51.7	74.0	-22.3	Peak	Horizontal
*	16932.4	36.6	15.3	51.9	88.2	-36.3	Peak	Horizontal
	17984.7	23.1	22.7	45.8	54.0	-8.2	Average	Horizontal
	17984.7	35.0	22.7	57.7	74.0	-16.3	Peak	Horizontal
*	10227.6	34.5	14.8	49.3	88.2	-38.9	Peak	Vertical
	10953.5	34.8	15.2	50.0	74.0	-24.0	Peak	Vertical
*	16929.0	36.3	15.3	51.6	88.2	-36.6	Peak	Vertical
	17974.5	23.2	22.4	45.6	54.0	-8.4	Average	Vertical
	17974.5	35.1	22.4	57.5	74.0	-16.5	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10922.9	34.2	15.2	49.4	74.0	-24.6	Peak	Horizontal
*	12769.1	37.7	12.9	50.6	88.2	-37.6	Peak	Horizontal
*	16918.8	35.7	15.2	50.9	88.2	-37.3	Peak	Horizontal
	17983.0	23.5	22.7	46.2	54.0	-7.8	Average	Horizontal
	17983.0	35.3	22.7	58.0	74.0	-16.0	Peak	Horizontal
*	10180.0	34.2	14.5	48.7	88.2	-39.5	Peak	Vertical
	11055.5	35.4	14.8	50.2	74.0	-23.8	Peak	Vertical
*	17226.5	35.8	16.1	51.9	88.2	-36.3	Peak	Vertical
	17991.5	22.2	22.8	45.0	54.0	-9.0	Average	Vertical
	17991.5	34.9	22.8	57.7	74.0	-16.3	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9834.9	36.5	14.5	51.0	88.2	-37.2	Peak	Horizontal
	11023.2	35.7	14.9	50.6	74.0	-23.4	Peak	Horizontal
*	17017.4	37.3	15.5	52.8	88.2	-35.4	Peak	Horizontal
	17986.4	22.7	22.7	45.4	54.0	-8.6	Average	Horizontal
	17986.4	36.3	22.7	59.0	74.0	-15.0	Peak	Horizontal
	11793.3	36.3	13.2	49.5	74.0	-24.5	Peak	Vertical
*	14086.6	37.4	15.1	52.5	88.2	-35.7	Peak	Vertical
*	17076.9	36.6	15.5	52.1	88.2	-36.1	Peak	Vertical
	17966.0	23.1	22.2	45.3	54.0	-8.7	Average	Vertical
	17966.0	35.9	22.2	58.1	74.0	-15.9	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11405.7	35.5	14.4	49.9	74.0	-24.1	Peak	Horizontal
*	13410.0	38.4	13.7	52.1	88.2	-36.1	Peak	Horizontal
*	17034.4	36.2	15.4	51.6	88.2	-36.6	Peak	Horizontal
	17991.5	23.4	22.8	46.2	54.0	-7.8	Average	Horizontal
	17991.5	34.7	22.8	57.5	74.0	-16.5	Peak	Horizontal
	11800.1	36.5	13.2	49.7	74.0	-24.3	Peak	Vertical
*	13447.4	39.1	13.7	52.8	88.2	-35.4	Peak	Vertical
*	16886.5	37.2	15.1	52.3	88.2	-35.9	Peak	Vertical
	17993.2	22.7	22.8	45.5	54.0	-8.5	Average	Vertical
	17993.2	34.8	22.8	57.6	74.0	-16.4	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11635.2	35.3	13.9	49.2	74.0	-24.8	Peak	Horizontal
*	13569.8	37.8	14.1	51.9	88.2	-36.3	Peak	Horizontal
*	16903.5	36.4	15.0	51.4	88.2	-36.8	Peak	Horizontal
	17983.0	23.3	22.7	46.0	54.0	-8.0	Average	Horizontal
	17983.0	35.3	22.7	58.0	74.0	-16.0	Peak	Horizontal
	10844.7	34.6	15.3	49.9	74.0	-24.1	Peak	Vertical
*	13559.6	40.0	14.0	54.0	88.2	-34.2	Peak	Vertical
*	17005.5	35.8	15.4	51.2	88.2	-37.0	Peak	Vertical
	17998.3	22.7	22.8	45.5	54.0	-8.5	Average	Vertical
	17998.3	34.7	22.8	57.5	74.0	-16.5	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9981.1	34.9	14.3	49.2	88.2	-39.0	Peak	Horizontal
	12396.8	36.0	12.4	48.4	54.0	-5.6	Average	Horizontal
	12396.8	40.9	12.4	53.3	74.0	-20.7	Peak	Horizontal
*	16920.5	35.6	15.2	50.8	88.2	-37.4	Peak	Horizontal
	17981.3	23.1	22.7	45.8	54.0	-8.2	Average	Horizontal
	17981.3	34.8	22.7	57.5	74.0	-16.5	Peak	Horizontal
*	10173.2	35.4	14.5	49.9	88.2	-38.3	Peak	Vertical
	11142.2	35.3	14.5	49.8	74.0	-24.2	Peak	Vertical
*	17031.0	35.9	15.6	51.5	88.2	-36.7	Peak	Vertical
	17996.6	22.9	22.8	45.7	54.0	-8.3	Average	Vertical
	17996.6	34.4	22.8	57.2	74.0	-16.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9921.6	34.7	14.5	49.2	88.2	-39.0	Peak	Horizontal
	11033.4	34.5	14.9	49.4	74.0	-24.6	Peak	Horizontal
*	16988.5	35.6	15.3	50.9	88.2	-37.3	Peak	Horizontal
	17994.9	23.1	22.8	45.9	54.0	-8.1	Average	Horizontal
	17994.9	34.3	22.8	57.1	74.0	-16.9	Peak	Horizontal
*	10113.7	35.3	14.5	49.8	88.2	-38.4	Peak	Vertical
	10968.8	35.3	15.1	50.4	74.0	-23.6	Peak	Vertical
*	16786.2	36.1	14.9	51.0	88.2	-37.2	Peak	Vertical
	17959.2	22.7	22.1	44.8	54.0	-9.2	Average	Vertical
	17959.2	36.1	22.1	58.2	74.0	-15.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10875.3	34.9	15.2	50.1	74.0	-23.9	Peak	Horizontal
*	13999.9	35.5	15.0	50.5	88.2	-37.7	Peak	Horizontal
*	16929.0	37.3	15.3	52.6	88.2	-35.6	Peak	Horizontal
	17967.7	23.2	22.2	45.4	54.0	-8.6	Average	Horizontal
	17967.7	36.3	22.2	58.5	74.0	-15.5	Peak	Horizontal
*	9919.9	34.9	14.5	49.4	88.2	-38.8	Peak	Vertical
	13369.2	37.9	13.4	51.3	74.0	-22.7	Peak	Vertical
*	16942.6	36.5	15.2	51.7	88.2	-36.5	Peak	Vertical
	17989.8	23.0	22.8	45.8	54.0	-8.2	Average	Vertical
	17989.8	34.3	22.8	57.1	74.0	-16.9	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT20	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9753.3	36.0	14.3	50.3	88.2	-37.9	Peak	Horizontal
	12223.4	36.3	12.8	49.1	54.0	-4.9	Average	Horizontal
	12223.4	45.1	12.8	57.9	74.0	-16.1	Peak	Horizontal
*	14902.6	36.4	15.2	51.6	88.2	-36.6	Peak	Horizontal
	17991.5	23.6	22.8	46.4	54.0	-7.6	Average	Horizontal
	17991.5	34.9	22.8	57.7	74.0	-16.3	Peak	Horizontal
	10773.3	28.6	15.2	43.8	54.0	-10.2	Peak	Vertical
	10773.3	36.1	15.2	51.3	74.0	-22.7	Average	Vertical
*	14146.1	37.1	15.1	52.2	88.2	-36.0	Peak	Vertical
*	14768.3	36.3	15.6	51.9	88.2	-36.3	Peak	Vertical
	17974.5	25.3	22.4	47.7	54.0	-6.3	Average	Vertical
	17974.5	35.7	22.4	58.1	74.0	-15.9	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT20	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12507.3	35.6	12.4	48.0	54.0	-6.0	Average	Horizontal
	12507.3	44.1	12.4	56.5	74.0	-17.5	Peak	Horizontal
*	14117.2	36.5	15.2	51.7	88.2	-36.5	Peak	Horizontal
*	17131.3	36.7	15.6	52.3	88.2	-35.9	Peak	Horizontal
	17947.3	24.5	22.0	46.5	54.0	-7.5	Average	Horizontal
	17947.3	35.7	22.0	57.7	74.0	-16.3	Peak	Horizontal
*	9909.7	36.0	14.5	50.5	88.2	-37.7	Peak	Vertical
	12507.3	35.2	12.4	47.6	54.0	-6.4	Average	Vertical
	12507.3	42.9	12.4	55.3	74.0	-18.7	Peak	Vertical
*	14780.2	35.6	15.6	51.2	88.2	-37.0	Peak	Vertical
	17998.3	25.2	22.8	48.0	54.0	-6.0	Average	Vertical
	17998.3	35.0	22.8	57.8	74.0	-16.2	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11693.0	29.1	13.6	42.7	54.0	-11.3	Average	Horizontal
	11693.0	37.5	13.6	51.1	74.0	-22.9	Peak	Horizontal
*	12828.6	42.9	13.0	55.9	88.2	-32.3	Peak	Horizontal
*	14033.9	35.9	15.2	51.1	88.2	-37.1	Peak	Horizontal
	17954.1	25.6	22.0	47.6	54.0	-6.4	Average	Horizontal
	17954.1	35.8	22.0	57.8	74.0	-16.2	Peak	Horizontal
	10917.8	29.4	15.2	44.6	54.0	-9.4	Average	Vertical
	10917.8	36.1	15.2	51.3	74.0	-22.7	Peak	Vertical
*	12828.6	43.1	13.0	56.1	88.2	-32.1	Peak	Vertical
*	14686.7	35.3	15.8	51.1	88.2	-37.1	Peak	Vertical
	17903.1	25.6	21.6	47.2	54.0	-6.8	Average	Vertical
	17903.1	37.0	21.6	58.6	74.0	-15.4	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10956.9	35.5	15.2	50.7	74.0	-23.3	Peak	Horizontal
*	13068.3	42.9	13.0	55.9	88.2	-32.3	Peak	Horizontal
*	14163.1	35.3	15.3	50.6	88.2	-37.6	Peak	Horizontal
	17986.4	25.9	22.7	48.6	54.0	-5.4	Average	Horizontal
	17986.4	34.6	22.7	57.3	74.0	-16.7	Peak	Horizontal
	11069.1	29.5	14.7	44.2	54.0	-9.8	Average	Vertical
	11069.1	36.4	14.7	51.1	74.0	-22.9	Peak	Vertical
*	13071.7	42.1	13.1	55.2	88.2	-33.0	Peak	Vertical
*	14418.1	35.9	15.6	51.5	88.2	-36.7	Peak	Vertical
	17984.7	25.2	22.7	47.9	54.0	-6.1	Average	Vertical
	17984.7	34.8	22.7	57.5	74.0	-16.5	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11449.9	34.8	14.4	49.2	74.0	-24.8	Peak	Horizontal
*	14125.7	36.0	15.1	51.1	88.2	-37.1	Peak	Horizontal
*	14996.1	35.8	14.8	50.6	88.2	-37.6	Peak	Horizontal
	17974.5	25.2	22.4	47.6	54.0	-6.4	Average	Horizontal
	17974.5	35.5	22.4	57.9	74.0	-16.1	Peak	Horizontal
*	9687.0	36.4	14.1	50.5	88.2	-37.7	Peak	Vertical
	13389.6	36.9	13.5	50.4	54.0	-3.6	Average	Vertical
	13389.6	45.9	13.5	59.4	74.0	-14.6	Peak	Vertical
*	14805.7	36.4	15.5	51.9	88.2	-36.3	Peak	Vertical
	17972.8	26.0	22.4	48.4	54.0	-5.6	Average	Vertical
	17972.8	36.3	22.4	58.7	74.0	-15.3	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10406.1	37.2	15.1	52.3	88.2	-35.9	Peak	Horizontal
	11269.7	29.6	14.3	43.9	54.0	-10.1	Average	Horizontal
	11269.7	37.1	14.3	51.4	74.0	-22.6	Peak	Horizontal
*	14928.1	38.2	14.9	53.1	88.2	-35.1	Peak	Horizontal
	17998.3	25.6	22.8	48.4	54.0	-5.6	Average	Horizontal
	17998.3	37.2	22.8	60.0	74.0	-14.0	Peak	Horizontal
*	9928.4	34.7	14.5	49.2	88.2	-39.0	Peak	Vertical
	11876.6	36.0	13.1	49.1	74.0	-24.9	Peak	Vertical
*	14795.5	35.3	15.5	50.8	88.2	-37.4	Peak	Vertical
	17979.6	25.9	22.6	48.5	54.0	-5.5	Average	Vertical
	17979.6	34.6	22.6	57.2	74.0	-16.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT40	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9836.6	35.3	14.4	49.7	88.2	-38.5	Peak	Horizontal
	12242.1	34.4	12.8	47.2	54.0	-6.8	Average	Horizontal
	12242.1	40.9	12.8	53.7	74.0	-20.3	Peak	Horizontal
*	14780.2	35.3	15.6	50.9	88.2	-37.3	Peak	Horizontal
	17996.6	25.6	22.8	48.4	54.0	-5.6	Average	Horizontal
	17996.6	34.4	22.8	57.2	74.0	-16.8	Peak	Horizontal
*	9914.8	34.1	14.5	48.6	88.2	-39.6	Peak	Vertical
	12248.9	31.7	12.7	44.4	54.0	-9.6	Average	Vertical
	12248.9	38.7	12.7	51.4	74.0	-22.6	Peak	Vertical
*	14940.0	36.0	15.0	51.0	88.2	-37.2	Peak	Vertical
	17998.3	25.1	22.8	47.9	54.0	-6.1	Average	Vertical
	17998.3	35.1	22.8	57.9	74.0	-16.1	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT40	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9928.4	37.9	14.5	52.4	88.2	-35.8	Peak	Horizontal
	12485.2	33.7	12.4	46.1	54.0	-7.9	Average	Horizontal
	12485.2	44.0	12.4	56.4	74.0	-17.6	Peak	Horizontal
*	13739.8	37.8	14.2	52.0	88.2	-36.2	Peak	Horizontal
	17984.7	25.6	22.7	48.3	54.0	-5.7	Average	Horizontal
	17984.7	37.2	22.7	59.9	74.0	-14.1	Peak	Horizontal
	12483.5	30.5	12.4	42.9	54.0	-11.1	Average	Vertical
	12483.5	38.6	12.4	51.0	74.0	-23.0	Peak	Vertical
*	14312.7	36.0	15.7	51.7	88.2	-36.5	Peak	Vertical
*	14897.5	36.4	15.2	51.6	88.2	-36.6	Peak	Vertical
	18000.0	26.5	22.9	49.4	54.0	-4.6	Average	Vertical
	18000.0	34.9	22.9	57.8	74.0	-16.2	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10958.6	35.2	15.2	50.4	74.0	-23.6	Peak	Horizontal
*	12789.5	40.1	12.9	53.0	88.2	-35.2	Peak	Horizontal
*	14137.6	37.0	15.0	52.0	88.2	-36.2	Peak	Horizontal
	17972.8	26.9	22.4	49.3	54.0	-4.7	Average	Horizontal
	17972.8	35.0	22.4	57.4	74.0	-16.6	Peak	Horizontal
	11031.7	34.7	14.9	49.6	74.0	-24.4	Peak	Vertical
*	12809.9	39.2	12.9	52.1	88.2	-36.1	Peak	Vertical
*	14035.6	35.6	15.2	50.8	88.2	-37.4	Peak	Vertical
	17994.9	26.0	22.8	48.8	54.0	-5.2	Average	Vertical
	17994.9	35.6	22.8	58.4	74.0	-15.6	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10977.3	34.6	15.1	49.7	74.0	-24.3	Peak	Horizontal
*	14210.7	35.0	15.5	50.5	88.2	-37.7	Peak	Horizontal
*	17080.3	36.3	15.6	51.9	88.2	-36.3	Peak	Horizontal
	17994.9	24.9	22.8	47.7	54.0	-6.3	Average	Horizontal
	17994.9	33.8	22.8	56.6	74.0	-17.4	Peak	Horizontal
	10967.1	34.9	15.1	50.0	74.0	-24.0	Peak	Vertical
*	13127.8	43.8	12.9	56.7	88.2	-31.5	Peak	Vertical
*	14006.7	36.7	15.0	51.7	88.2	-36.5	Peak	Vertical
	17993.2	24.7	22.8	47.5	54.0	-6.5	Average	Vertical
	17993.2	35.0	22.8	57.8	74.0	-16.2	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9799.2	35.0	14.5	49.5	88.2	-38.7	Peak	Horizontal
	13374.3	34.6	13.4	48.0	54.0	-6.0	Average	Horizontal
	13374.3	41.8	13.4	55.2	74.0	-18.8	Peak	Horizontal
*	17005.5	36.3	15.4	51.7	88.2	-36.5	Peak	Horizontal
	17986.4	25.1	22.7	47.8	54.0	-6.2	Average	Horizontal
	17986.4	35.7	22.7	58.4	74.0	-15.6	Peak	Horizontal
*	10037.2	35.9	14.2	50.1	88.2	-38.1	Peak	Vertical
	13367.5	33.7	13.4	47.1	54.0	-6.9	Average	Vertical
	13367.5	42.6	13.4	56.0	74.0	-18.0	Peak	Vertical
*	14895.8	36.2	15.3	51.5	88.2	-36.7	Peak	Vertical
	17932.0	25.1	21.8	46.9	54.0	-7.1	Average	Vertical
	17932.0	35.3	21.8	57.1	74.0	-16.9	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10916.1	35.0	15.2	50.2	74.0	-23.8	Peak	Horizontal
*	13695.6	40.1	14.0	54.1	88.2	-34.1	Peak	Horizontal
*	14751.3	35.6	15.5	51.1	88.2	-37.1	Peak	Horizontal
	17988.1	25.1	22.8	47.9	54.0	-6.1	Average	Horizontal
	17988.1	35.5	22.8	58.3	74.0	-15.7	Peak	Horizontal
	10948.4	34.8	15.2	50.0	74.0	-24.0	Peak	Vertical
*	13687.1	41.9	14.0	55.9	88.2	-32.3	Peak	Vertical
*	14695.2	35.2	15.8	51.0	88.2	-37.2	Peak	Vertical
	17983.0	25.4	22.7	48.1	54.0	-5.9	Average	Vertical
	17983.0	35.2	22.7	57.9	74.0	-16.1	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT80	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12299.9	32.7	12.6	45.3	54.0	-8.7	Average	Horizontal
	12299.9	39.5	12.6	52.1	74.0	-21.9	Peak	Horizontal
*	14220.9	35.6	15.3	50.9	88.2	-37.3	Peak	Horizontal
*	14929.8	36.4	14.9	51.3	88.2	-36.9	Peak	Horizontal
	17979.6	25.6	22.6	48.2	54.0	-5.8	Average	Horizontal
	17979.6	34.9	22.6	57.5	74.0	-16.5	Peak	Horizontal
*	10540.4	35.1	15.2	50.3	88.2	-37.9	Peak	Vertical
	12301.6	30.5	12.6	43.1	54.0	-10.9	Average	Vertical
	12301.6	38.6	12.6	51.2	74.0	-22.8	Peak	Vertical
*	14322.9	35.5	15.7	51.2	88.2	-37.0	Peak	Vertical
	17989.8	25.3	22.8	48.1	54.0	-5.9	Average	Vertical
	17989.8	35.5	22.8	58.3	74.0	-15.7	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10253.1	35.3	14.8	50.1	88.2	-38.1	Peak	Horizontal
	12420.6	30.2	12.4	42.6	54.0	-11.4	Average	Horizontal
	12420.6	38.8	12.4	51.2	74.0	-22.8	Peak	Horizontal
*	14832.9	35.7	15.3	51.0	88.2	-37.2	Peak	Horizontal
	17971.1	25.1	22.3	47.4	54.0	-6.6	Average	Horizontal
	17971.1	35.8	22.3	58.1	74.0	-15.9	Peak	Horizontal
	10880.4	34.5	15.2	49.7	74.0	-24.3	Peak	Vertical
*	14020.3	35.3	15.1	50.4	88.2	-37.8	Peak	Vertical
*	14795.5	35.5	15.5	51.0	88.2	-37.2	Peak	Vertical
	17988.1	25.1	22.8	47.9	54.0	-6.1	Average	Vertical
	17988.1	35.5	22.8	58.3	74.0	-15.7	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10914.4	34.9	15.2	50.1	74.0	-23.9	Peak	Horizontal
*	12769.1	39.3	12.9	52.2	88.2	-36.0	Peak	Horizontal
*	15144.0	37.0	14.3	51.3	88.2	-36.9	Peak	Horizontal
	17972.8	25.6	22.4	48.0	54.0	-6.0	Average	Horizontal
	17972.8	37.2	22.4	59.6	74.0	-14.4	Peak	Horizontal
*	10683.2	35.1	15.0	50.1	74.0	-23.9	Peak	Vertical
	14005.0	36.0	15.0	51.0	88.2	-37.2	Peak	Vertical
*	14690.1	35.4	15.8	51.2	88.2	-37.0	Peak	Vertical
	17955.8	25.1	22.1	47.2	54.0	-6.8	Average	Vertical
	17955.8	36.1	22.1	58.2	74.0	-15.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	13274.0	32.9	13.2	46.1	54.0	-7.9	Average	Horizontal
	13274.0	39.2	13.2	52.4	74.0	-21.6	Peak	Horizontal
*	14401.1	35.2	15.8	51.0	88.2	-37.2	Peak	Horizontal
*	14873.7	35.9	15.3	51.2	88.2	-37.0	Peak	Horizontal
	17976.2	25.1	22.5	47.6	54.0	-6.4	Average	Horizontal
	17976.2	35.0	22.5	57.5	74.0	-16.5	Peak	Horizontal
*	10254.8	34.8	14.8	49.6	88.2	-38.6	Peak	Vertical
	13268.9	34.6	13.2	47.8	54.0	-6.2	Average	Vertical
	13268.9	41.5	13.2	54.7	74.0	-19.3	Peak	Vertical
*	14860.1	35.7	15.3	51.0	88.2	-37.2	Peak	Vertical
	17989.8	25.3	22.8	48.1	54.0	-5.9	Average	Vertical
	17989.8	35.4	22.8	58.2	74.0	-15.8	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10543.8	35.1	15.2	50.3	88.2	-37.9	Peak	Horizontal
	13393.0	32.2	13.6	45.8	54.0	-8.2	Average	Horizontal
	13393.0	38.3	13.6	51.9	74.0	-22.1	Peak	Horizontal
*	15028.4	36.0	14.4	50.4	88.2	-37.8	Peak	Horizontal
	17960.9	25.6	22.1	47.7	54.0	-6.3	Average	Horizontal
	17960.9	35.2	22.1	57.3	74.0	-16.7	Peak	Horizontal
	10882.1	34.9	15.2	50.1	74.0	-23.9	Peak	Vertical
*	13404.9	42.1	13.6	55.7	88.2	-32.5	Peak	Vertical
*	14836.3	35.8	15.3	51.1	88.2	-37.1	Peak	Vertical
	17984.7	25.6	22.7	48.3	54.0	-5.7	Average	Vertical
	17984.7	35.2	22.7	57.9	74.0	-16.1	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11126.9	35.4	14.5	49.9	74.0	-24.1	Peak	Horizontal
*	13576.6	37.7	14.1	51.8	88.2	-36.4	Peak	Horizontal
*	14809.1	35.8	15.5	51.3	88.2	-36.9	Peak	Horizontal
	17994.9	25.4	22.8	48.2	54.0	-5.8	Average	Horizontal
	17994.9	35.0	22.8	57.8	74.0	-16.2	Peak	Horizontal
*	10443.5	35.2	15.2	50.4	88.2	-37.8	Peak	Vertical
	11147.3	35.1	14.4	49.5	74.0	-24.5	Peak	Vertical
*	13580.0	41.7	14.1	55.8	88.2	-32.4	Peak	Vertical
	17981.3	25.1	22.7	47.8	54.0	-6.2	Average	Vertical
	17981.3	35.6	22.7	58.3	74.0	-15.7	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10181.7	34.8	14.5	49.3	88.2	-38.9	Peak	Horizontal
	11033.4	35.2	14.9	50.1	74.0	-23.9	Peak	Horizontal
*	14673.1	35.9	15.7	51.6	88.2	-36.6	Peak	Horizontal
	17979.6	26.0	22.6	48.6	54.0	-5.4	Average	Horizontal
	17979.6	35.8	22.6	58.4	74.0	-15.6	Peak	Horizontal
*	10265.0	36.1	14.8	50.9	88.2	-37.3	Peak	Vertical
	11075.9	35.3	14.7	50.0	74.0	-24.0	Peak	Vertical
*	14152.9	35.9	15.2	51.1	88.2	-37.1	Peak	Vertical
	17981.3	25.7	22.7	48.4	54.0	-5.6	Average	Vertical
	17981.3	35.2	22.7	57.9	74.0	-16.1	Peak	Vertical

Note 1: “*” is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10854.9	35.0	15.2	50.2	74.0	-23.8	Peak	Horizontal
*	13964.2	34.6	15.0	49.6	88.2	-38.6	Peak	Horizontal
*	14739.4	35.3	15.5	50.8	88.2	-37.4	Peak	Horizontal
	17945.6	25.3	22.0	47.3	54.0	-6.7	Average	Horizontal
	17945.6	36.1	22.0	58.1	74.0	-15.9	Peak	Horizontal
*	10372.1	35.5	15.0	50.5	88.2	-37.7	Peak	Vertical
	10912.7	34.4	15.2	49.6	74.0	-24.4	Peak	Vertical
*	14302.5	36.5	15.7	52.2	88.2	-36.0	Peak	Vertical
	17994.9	25.6	22.8	48.4	54.0	-5.6	Average	Vertical
	17994.9	35.6	22.8	58.4	74.0	-15.6	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10025.3	35.0	14.3	49.3	88.2	-38.9	Peak	Horizontal
	10963.7	35.0	15.1	50.1	74.0	-23.9	Peak	Horizontal
*	14243.0	36.0	15.6	51.6	88.2	-36.6	Peak	Horizontal
	17916.7	25.9	21.6	47.5	54.0	-6.5	Average	Horizontal
	17916.7	36.2	21.6	57.8	74.0	-16.2	Peak	Horizontal
*	9935.2	35.1	14.5	49.6	88.2	-38.6	Peak	Vertical
	13330.1	31.3	13.3	44.6	54.0	-9.4	Average	Vertical
	13330.1	37.9	13.3	51.2	74.0	-22.8	Peak	Vertical
*	14894.1	35.2	15.3	50.5	88.2	-37.7	Peak	Vertical
	17983.0	25.1	22.7	47.8	54.0	-6.2	Average	Vertical
	17983.0	35.7	22.7	58.4	74.0	-15.6	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Deco BE65-Outdoor	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-03-05
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10533.6	34.6	15.2	49.8	88.2	-38.4	Peak	Horizontal
	11009.6	34.6	15.0	49.6	74.0	-24.4	Peak	Horizontal
*	14904.3	35.9	15.2	51.1	88.2	-37.1	Peak	Horizontal
	17996.6	25.3	22.8	48.1	54.0	-5.9	Average	Horizontal
	17996.6	34.6	22.8	57.4	74.0	-16.6	Peak	Horizontal
*	6174.8	44.9	5.1	50.0	88.2	-38.2	Peak	Vertical
*	9928.4	35.6	14.5	50.1	88.2	-38.1	Peak	Vertical
	10994.3	35.1	15.1	50.2	74.0	-23.8	Peak	Vertical
	17981.3	25.6	22.7	48.3	54.0	-5.7	Average	Vertical
	17981.3	35.2	22.7	57.9	74.0	-16.1	Peak	Vertical


Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission in 30M ~ 1GHz:

Site	WZ-AC2	Test Date	2025-03-04
Limit	FCC_6G_RE(3m)	Test Engineer	Jerry Lu
Factor	VULB 9162_00047	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 6115MHz		

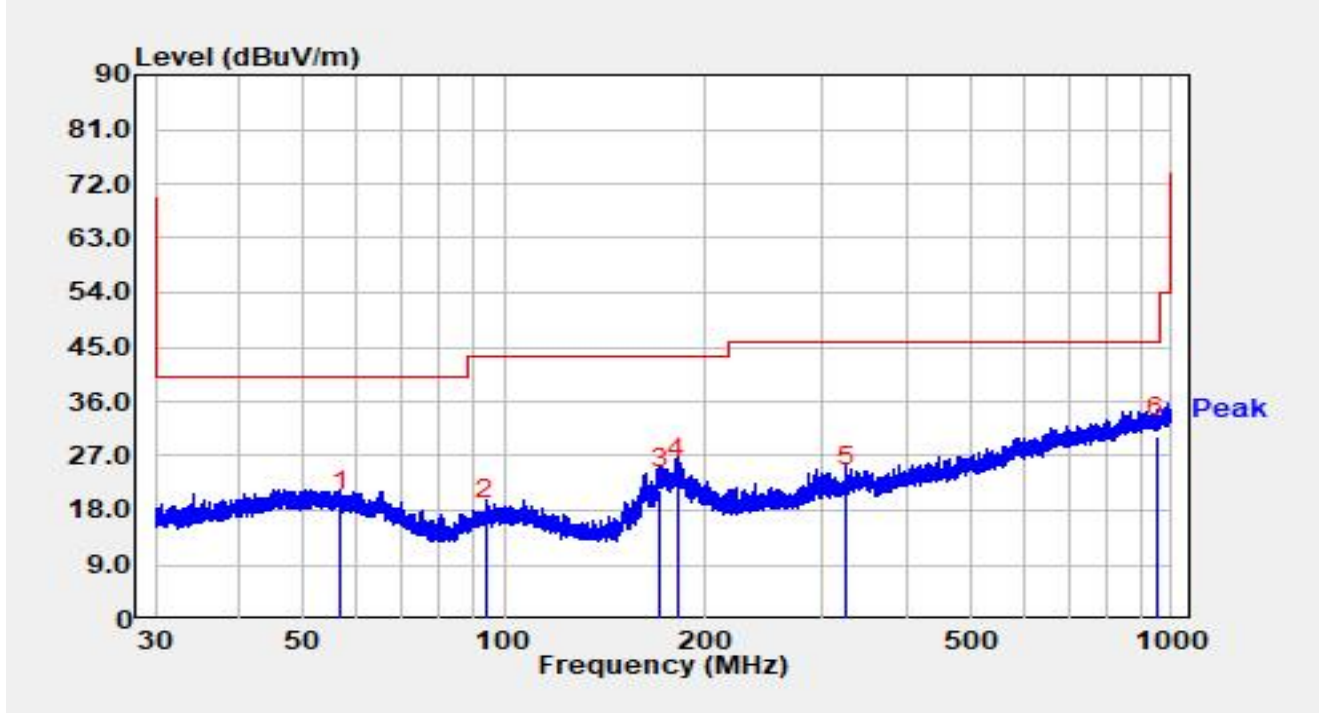


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		56.792	-2.15	19.93	17.78	-22.22	40.00	QP
2		93.966	-1.25	17.61	16.36	-27.14	43.50	QP
3		171.032	5.23	16.25	21.47	-22.03	43.50	QP
4		181.856	6.25	16.98	23.23	-20.27	43.50	QP
5		326.396	0.27	21.74	22.01	-23.99	46.00	QP
6	*	948.096	-1.23	31.41	30.19	-15.81	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WZ-AC2	Test Date	2025-03-04
Limit	FCC_6G_RE(3m)	Test Engineer	Jerry Lu
Factor	VULB 9162_00047	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 6115MHz		

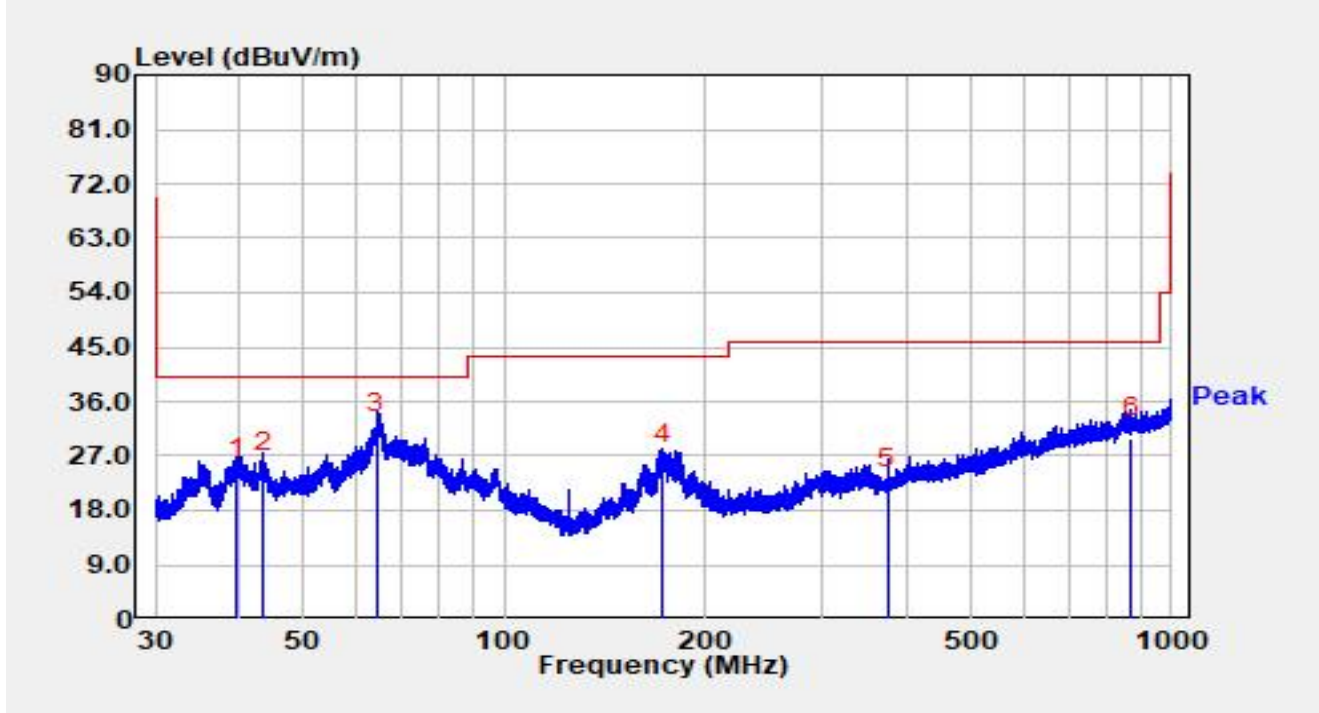


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		39.757	4.23	19.16	23.39	-16.61	40.00	QP
2		43.659	4.27	20.09	24.35	-15.65	40.00	QP
3	*	64.433	12.66	18.20	30.86	-9.14	40.00	QP
4		172.478	9.26	16.32	25.57	-17.93	43.50	QP
5		375.017	-1.21	22.68	21.47	-24.53	46.00	QP
6		871.266	-1.26	31.21	29.96	-16.04	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

Site	WZ-AC2	Test Date	2025-02-27
Limit	FCC_6G RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 6115MHz		

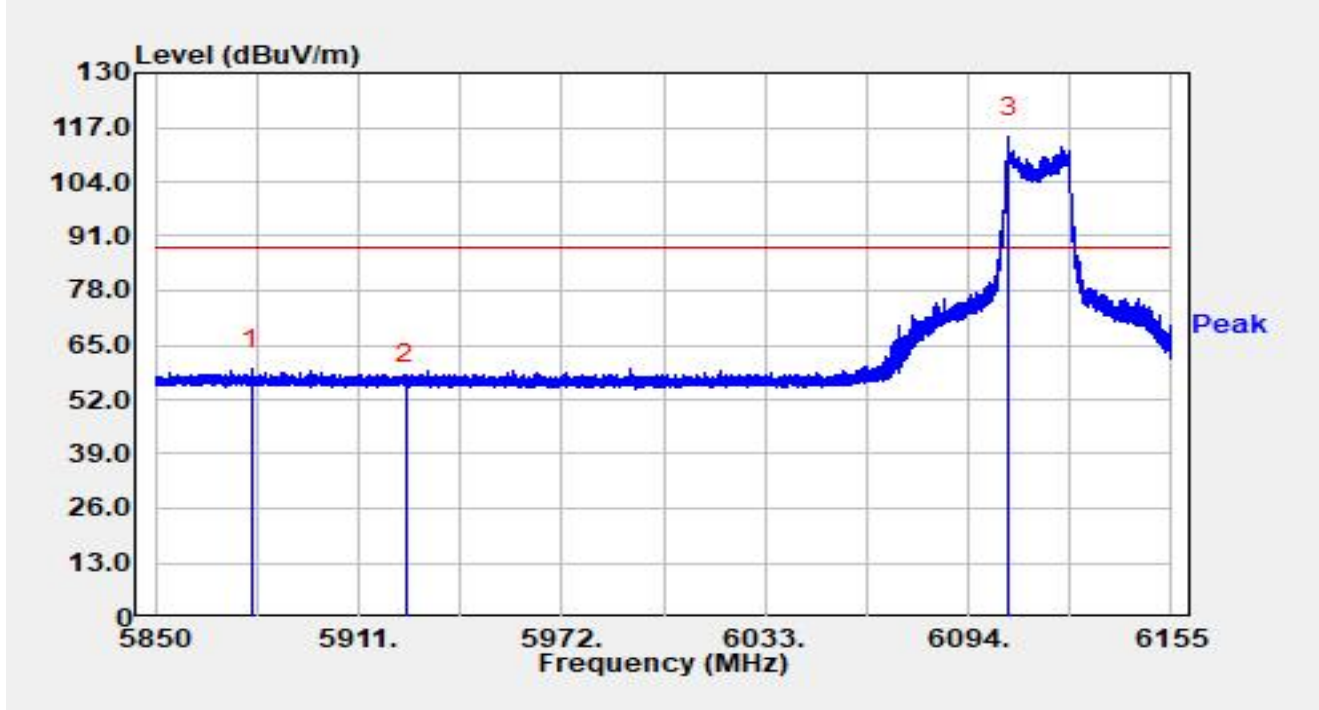


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5878.975	37.75	21.60	59.34	-28.86	88.20	Peak
2		5925.000	34.16	21.59	55.75	-32.45	88.20	Peak
3		6106.078	92.08	22.47	114.56	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-27
Limit	FCC_6G RE (3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 6115MHz		

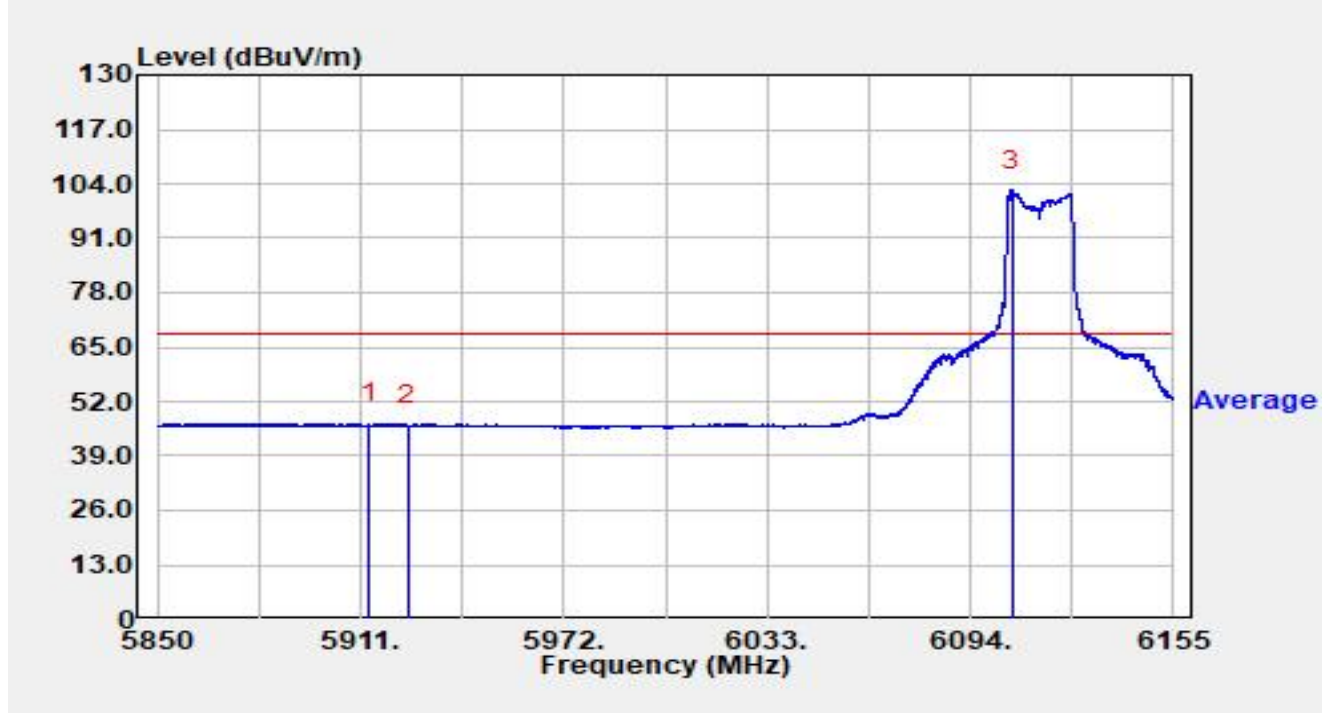


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.532	25.16	21.54	46.70	-21.50	68.20	Average
2		5925.000	24.64	21.59	46.23	-21.97	68.20	Average
3		6106.383	79.85	22.47	102.32	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-27
Limit	FCC_6G RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 6115MHz		

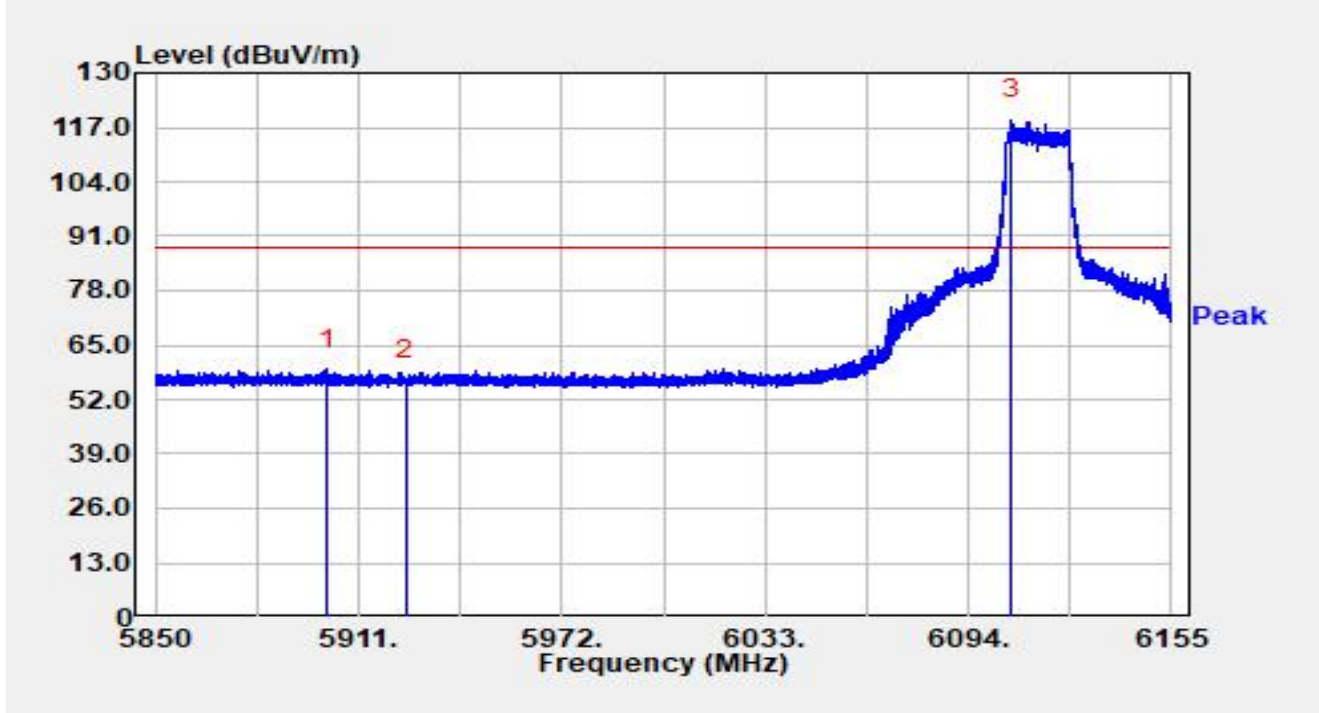


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5901.697	37.66	21.53	59.19	-29.01	88.20	Peak
2		5925.000	35.27	21.59	56.86	-31.34	88.20	Peak
3		6107.146	96.35	22.47	118.83	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-02-27
Limit	FCC_6G RE (3m)-AV	Test Engineer	Dick Shen
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 6115MHz		

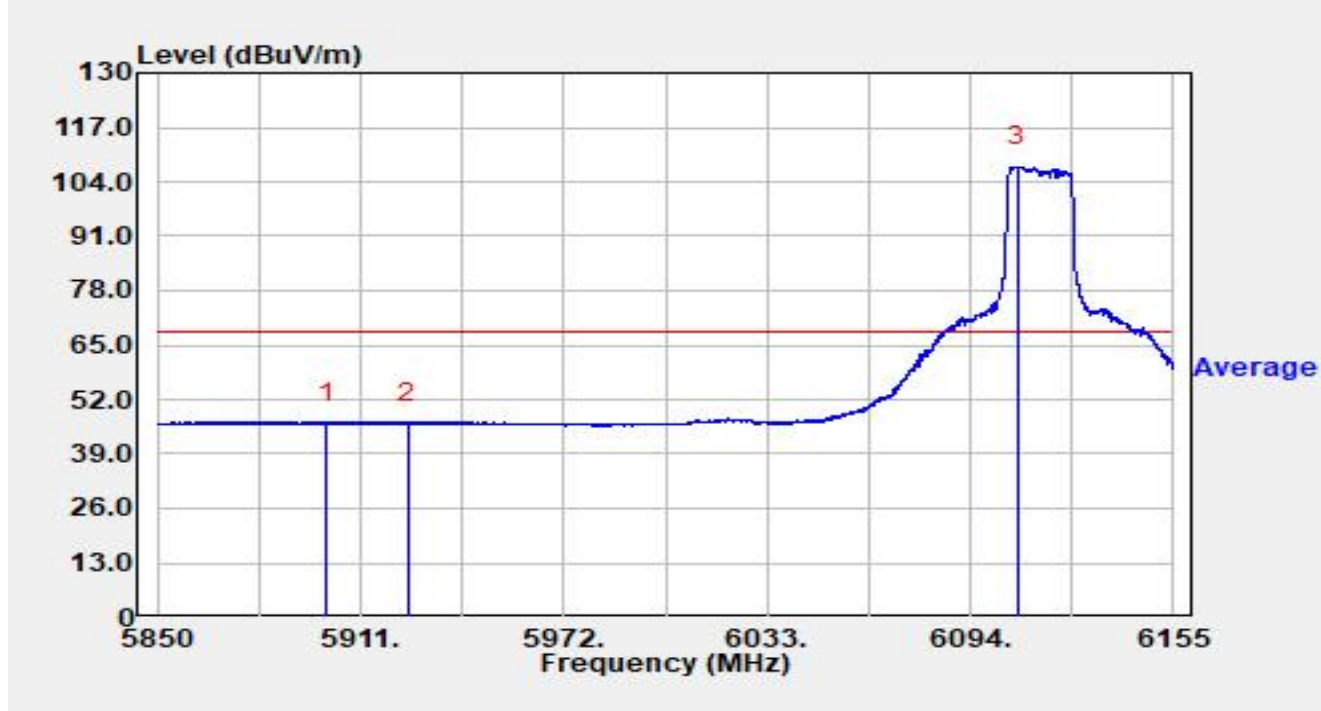


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5900.722	25.05	21.53	46.58	-21.62	68.20	Average
2		5925.000	24.73	21.59	46.33	-21.87	68.20	Average
3		6108.091	85.17	22.47	107.64	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 6125MHz		

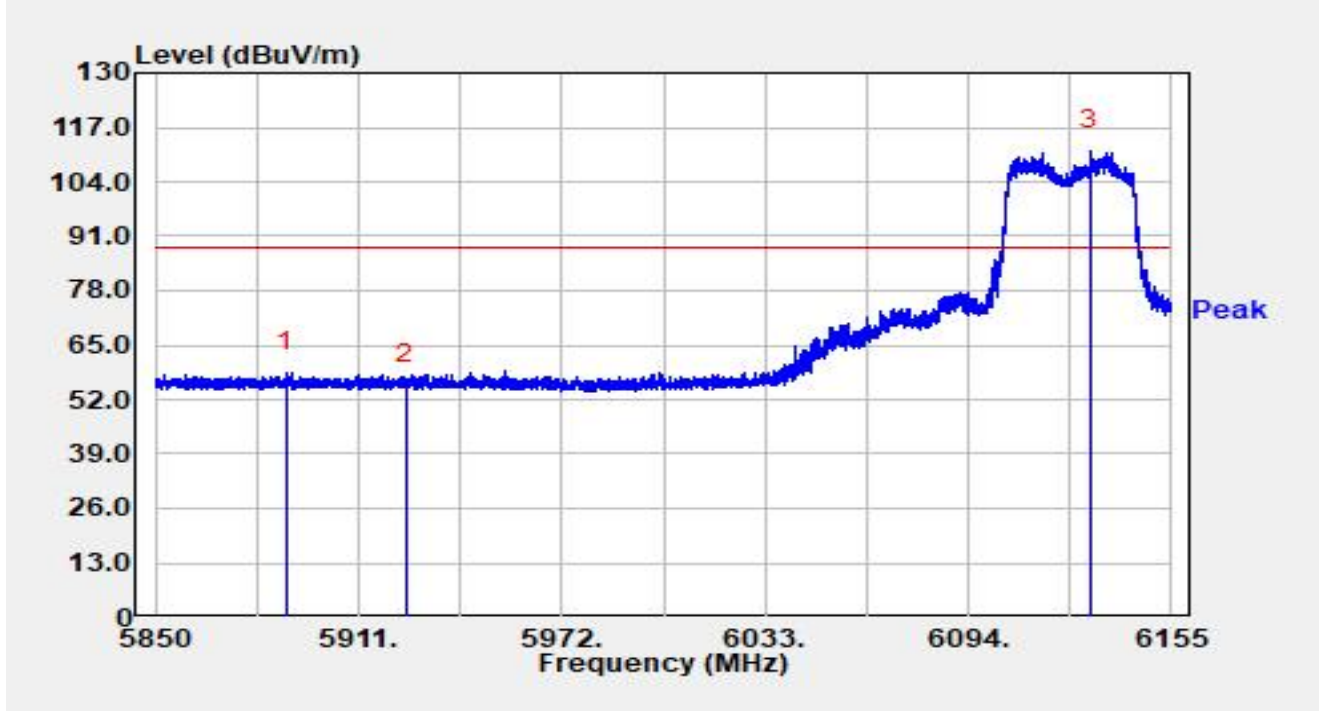


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5889.223	36.83	21.55	58.39	-29.81	88.20	Peak
2		5925.000	34.23	21.59	55.82	-32.38	88.20	Peak
3		6130.691	89.12	22.31	111.43	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 6125MHz		

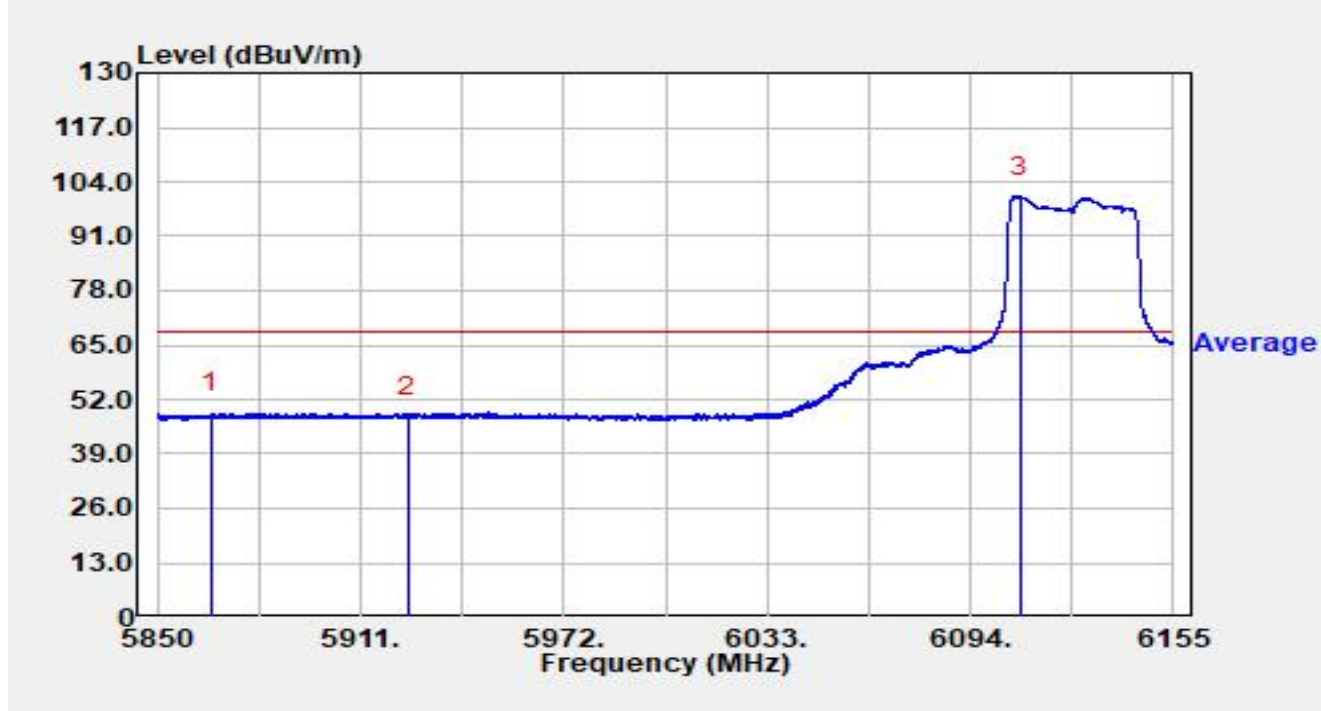


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5866.226	27.13	21.61	48.75	-19.45	68.20	Average
2		5925.000	26.42	21.59	48.02	-20.18	68.20	Average
3		6108.854	78.07	22.47	100.54	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 6125MHz		

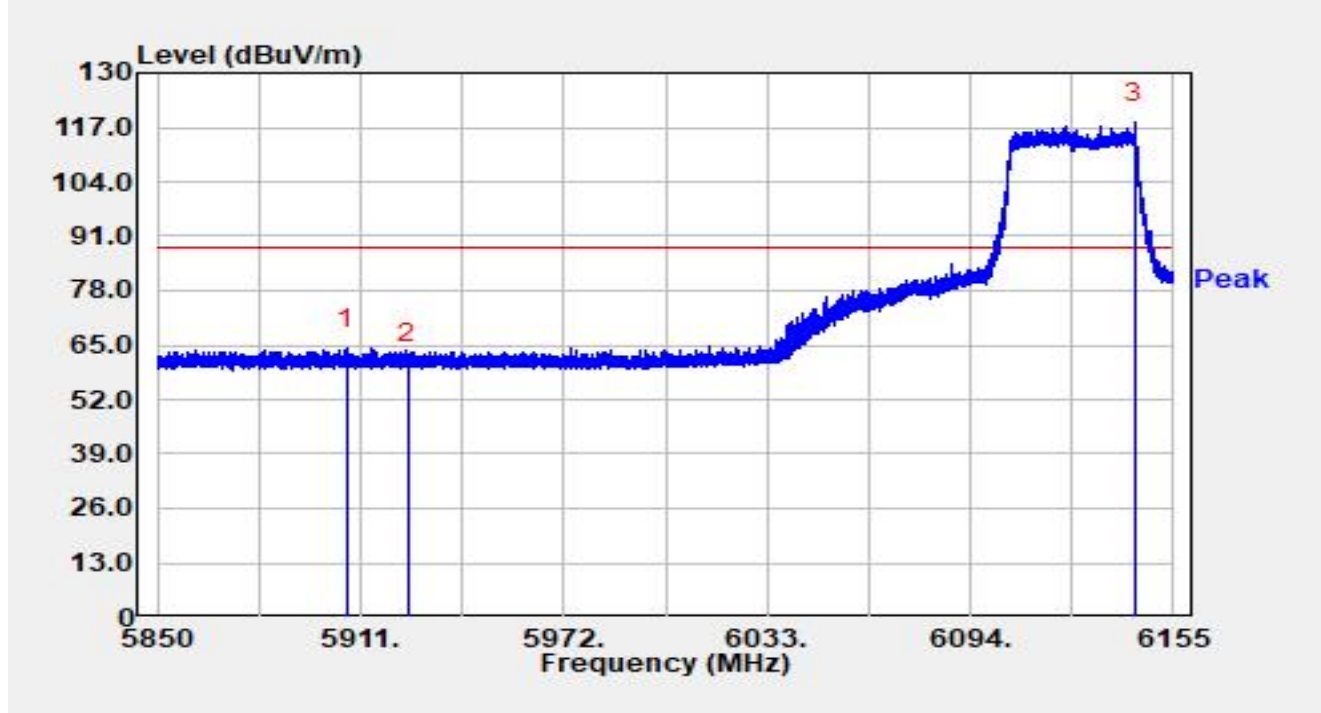


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5906.700	42.52	21.54	64.06	-24.14	88.20	Peak
2		5925.000	38.79	21.59	60.39	-27.81	88.20	Peak
3		6143.318	95.70	22.32	118.02	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 6125MHz		

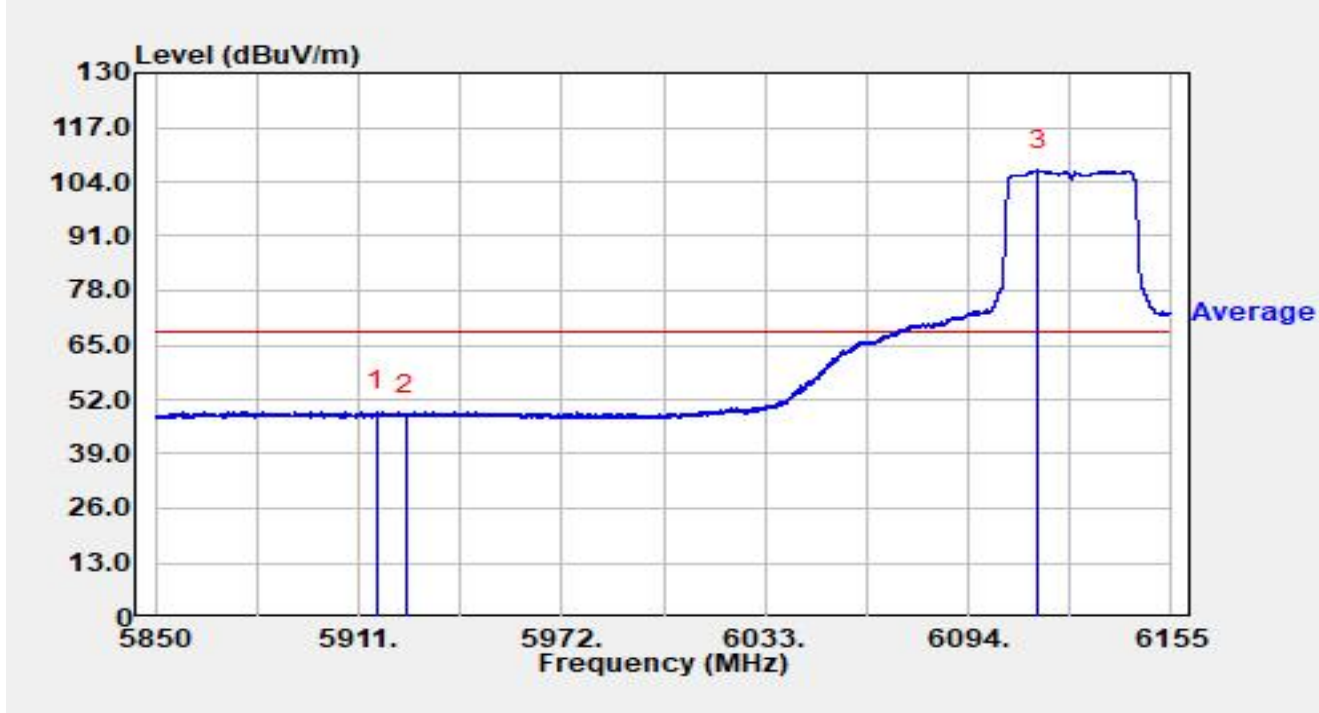


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5916.521	27.58	21.55	49.13	-19.07	68.20	Average
2		5925.000	26.64	21.59	48.23	-19.97	68.20	Average
3		6114.984	84.26	22.47	106.73	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 6145MHz		

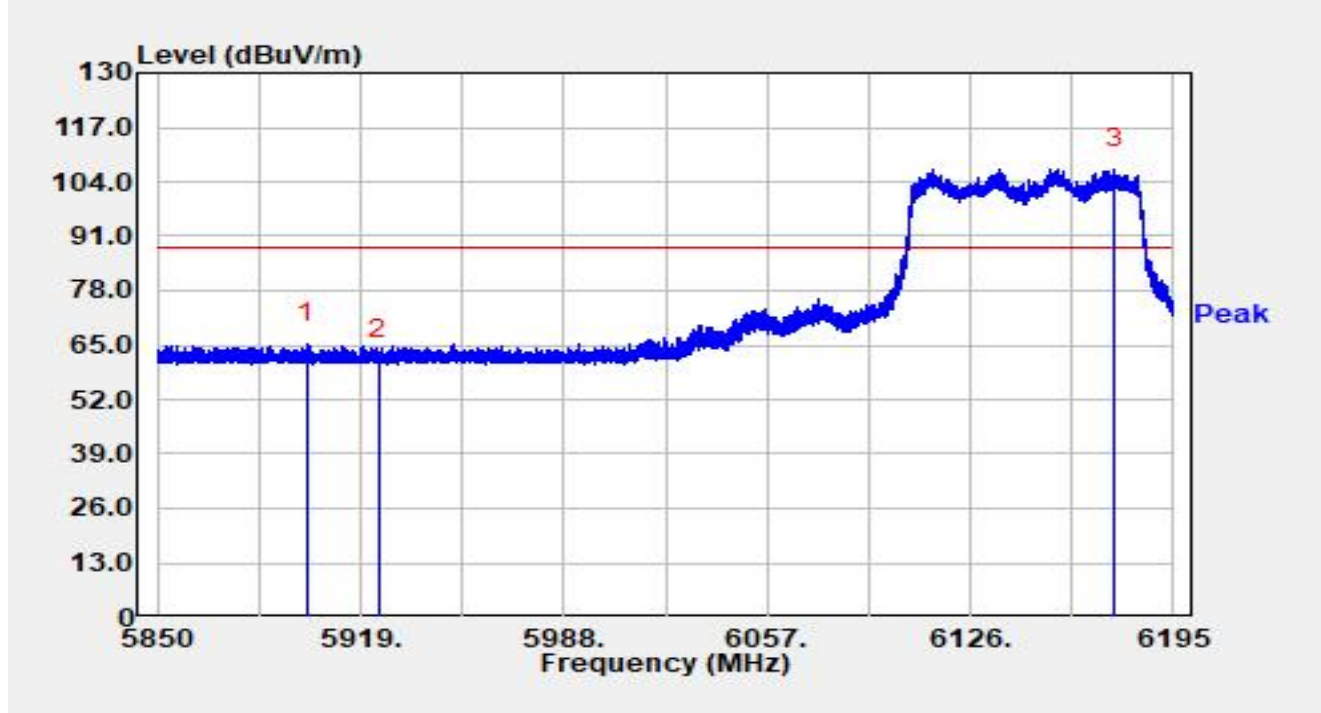


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5900.853	43.73	21.53	65.26	-22.94	88.20	Peak
2		5925.000	39.86	21.59	61.45	-26.75	88.20	Peak
3		6175.231	84.31	22.84	107.14	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 6145MHz		

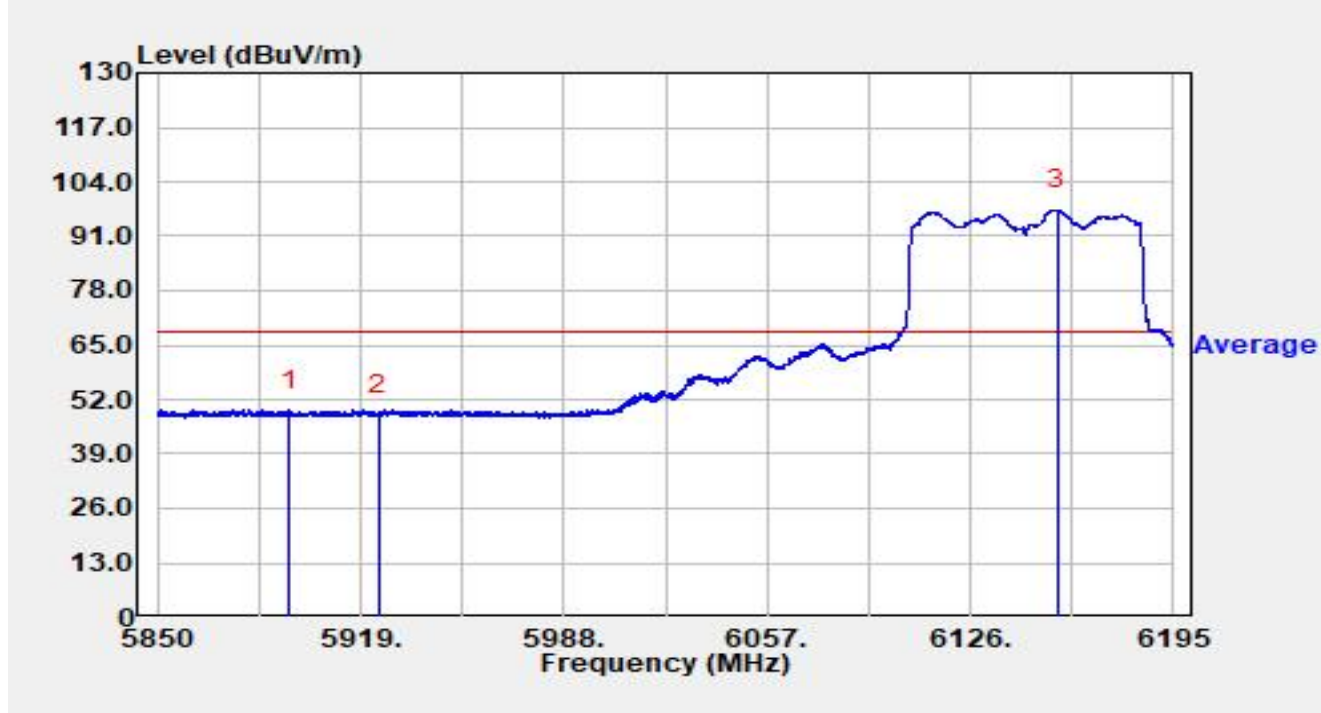


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5894.747	27.90	21.52	49.43	-18.77	68.20	Average
2		5925.000	26.93	21.59	48.52	-19.68	68.20	Average
3		6155.601	74.82	22.49	97.32	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 6145MHz		

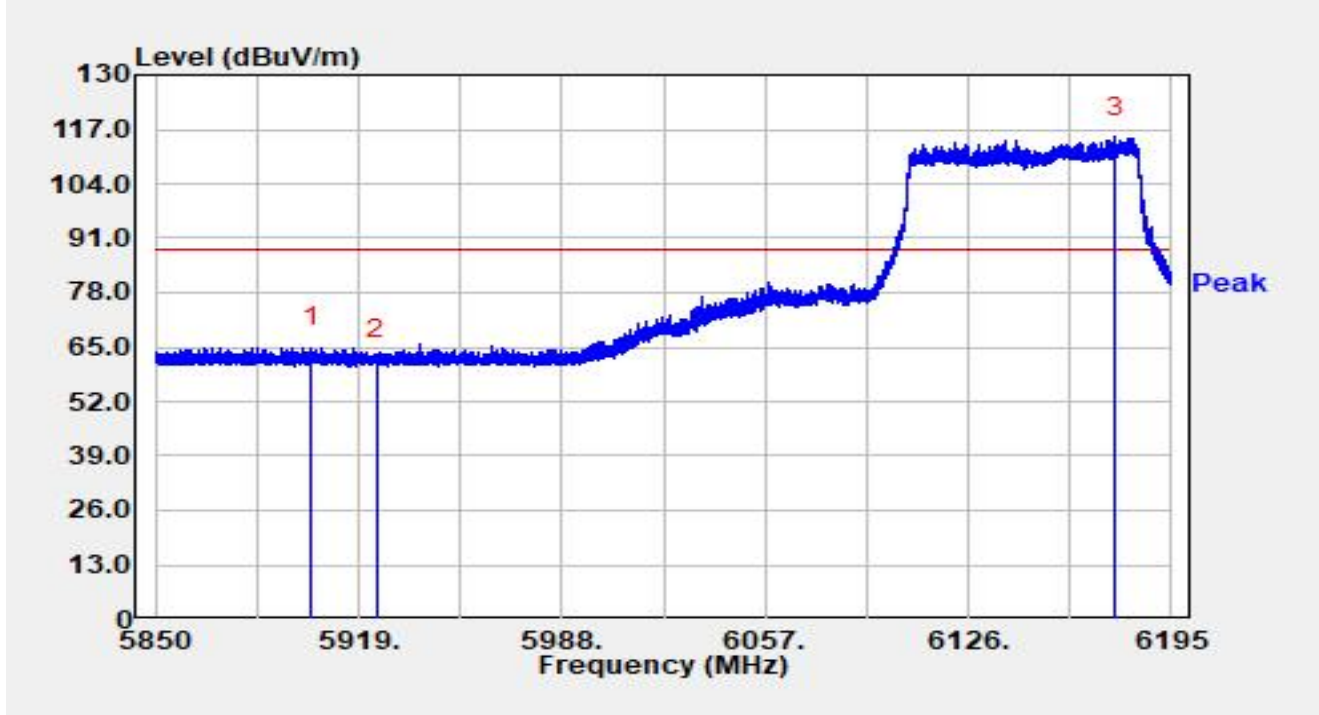


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5902.750	43.41	21.53	64.94	-23.26	88.20	Peak
2		5925.000	40.64	21.59	62.23	-25.97	88.20	Peak
3		6175.956	92.23	22.84	115.07	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 6145MHz		

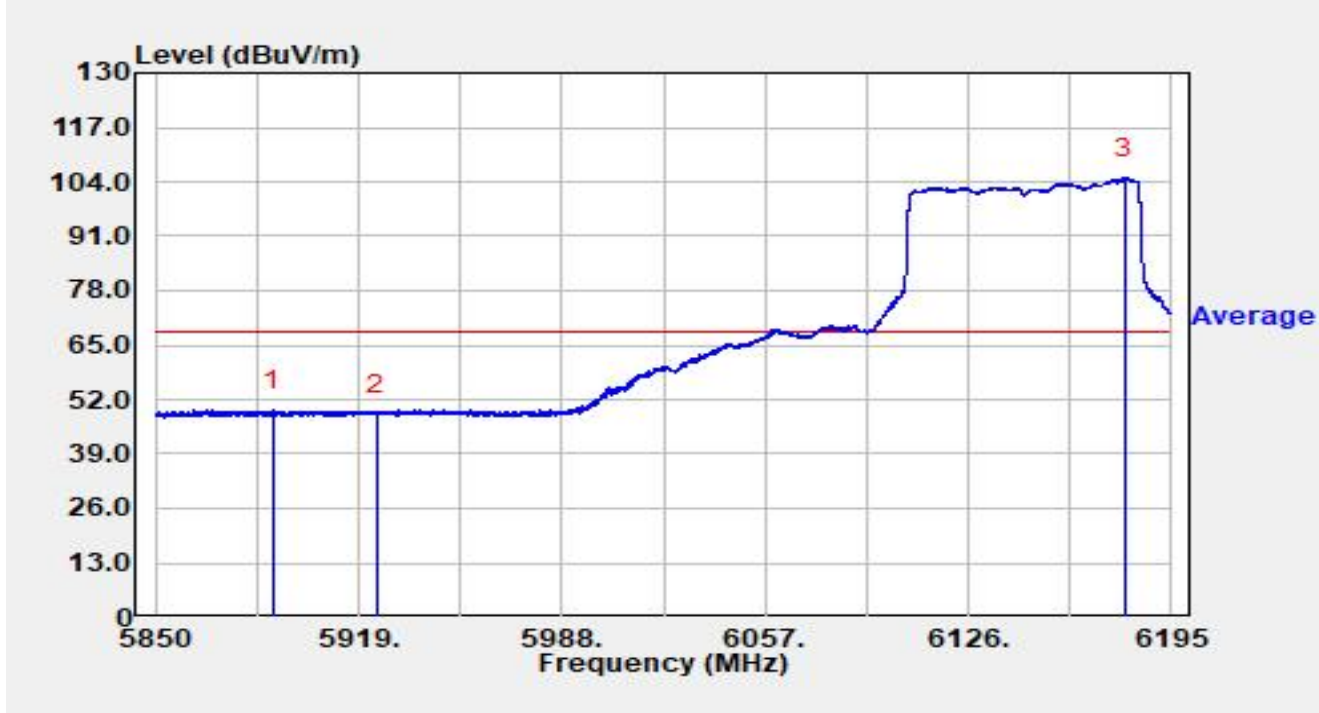


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5890.089	27.99	21.55	49.53	-18.67	68.20	Average
2		5925.000	26.86	21.59	48.45	-19.75	68.20	Average
3		6178.958	81.95	22.88	104.83	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6185MHz		

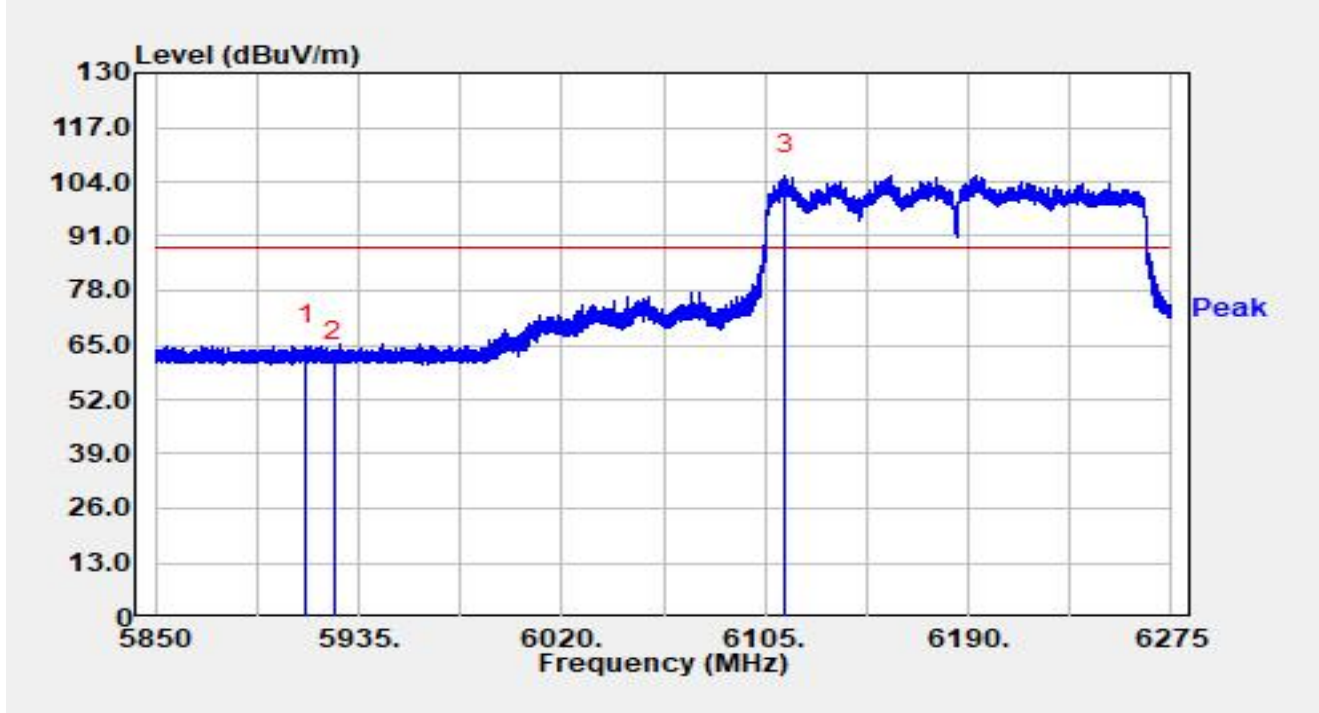


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5913.197	43.45	21.54	64.99	-23.21	88.20	Peak
2		5925.000	39.55	21.59	61.15	-27.05	88.20	Peak
3		6113.160	83.07	22.47	105.54	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6185MHz		

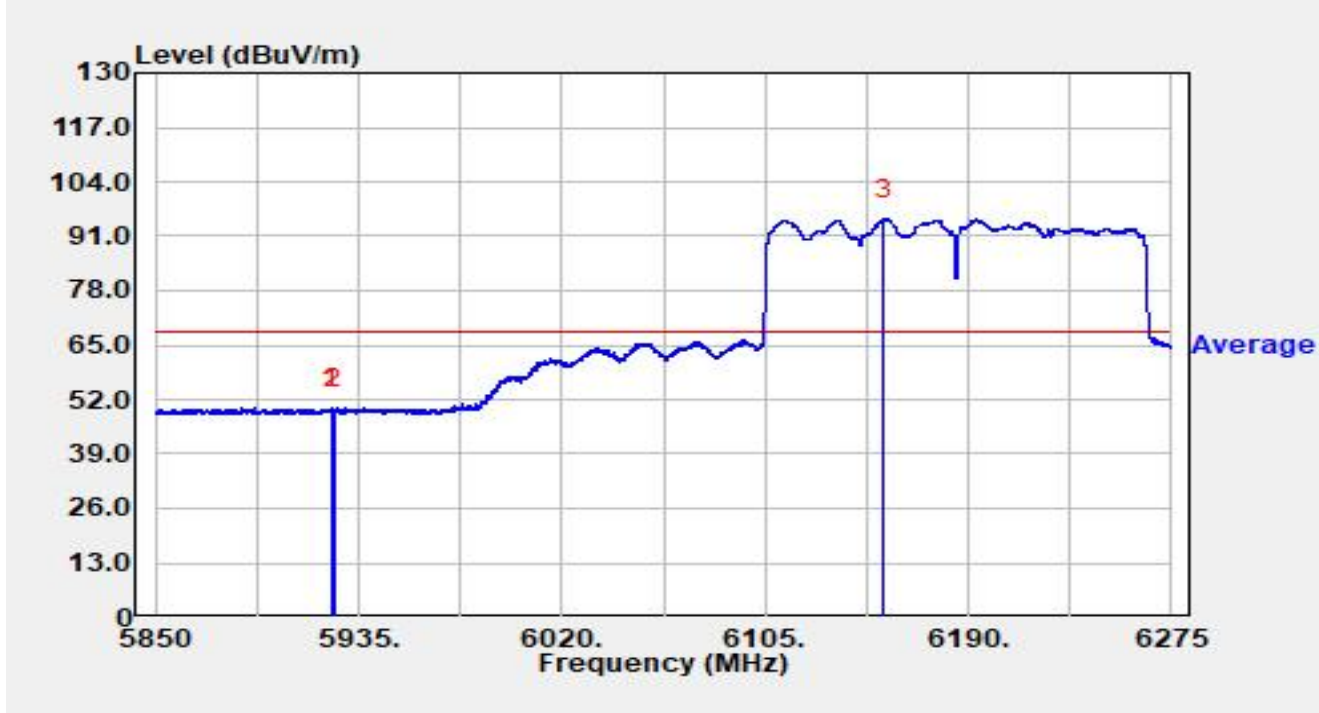


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.822	28.37	21.59	49.96	-18.24	68.20	Average
2		5925.000	28.03	21.59	49.63	-18.57	68.20	Average
3		6154.725	72.63	22.47	95.10	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6185MHz		

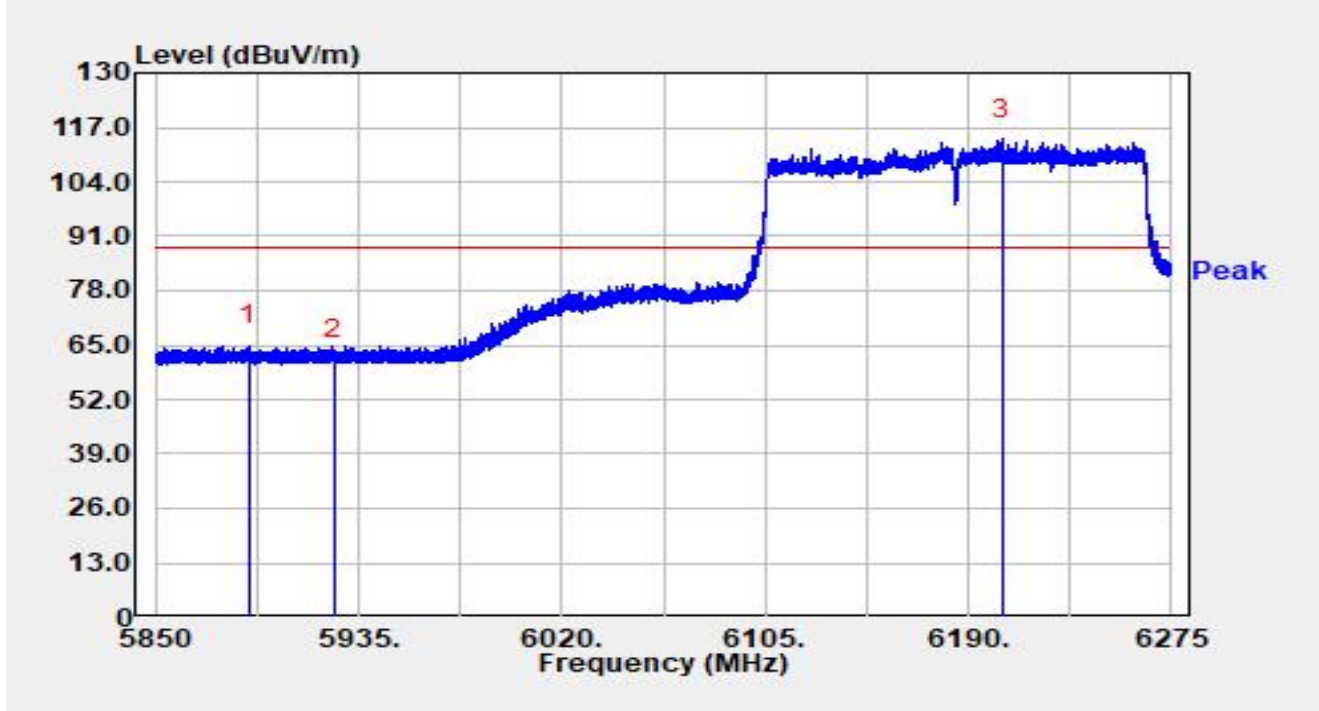


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5889.313	43.25	21.55	64.80	-23.40	88.20	Peak
2		5925.000	39.98	21.59	61.57	-26.63	88.20	Peak
3		6203.940	91.35	22.93	114.28	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6185MHz		

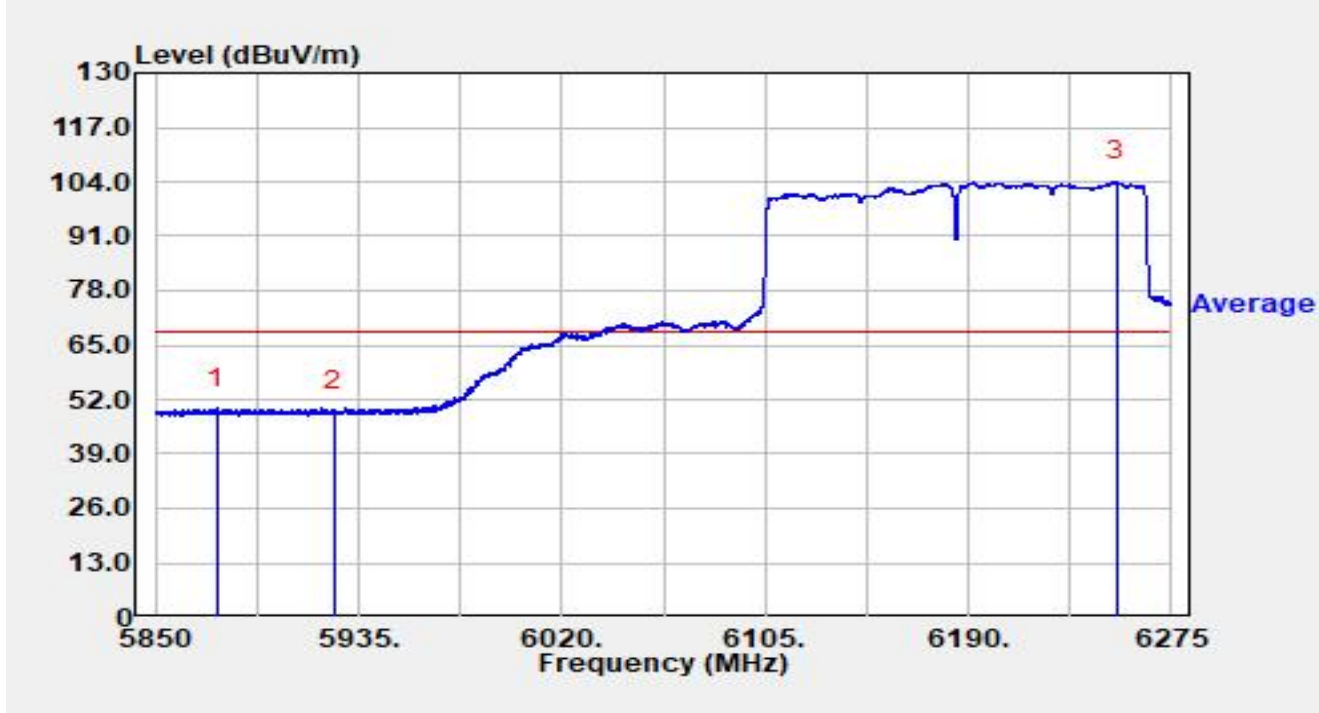


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5875.925	28.27	21.60	49.87	-18.33	68.20	Average
2		5925.000	27.47	21.59	49.07	-19.13	68.20	Average
3		6252.050	81.36	22.67	104.03	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz		

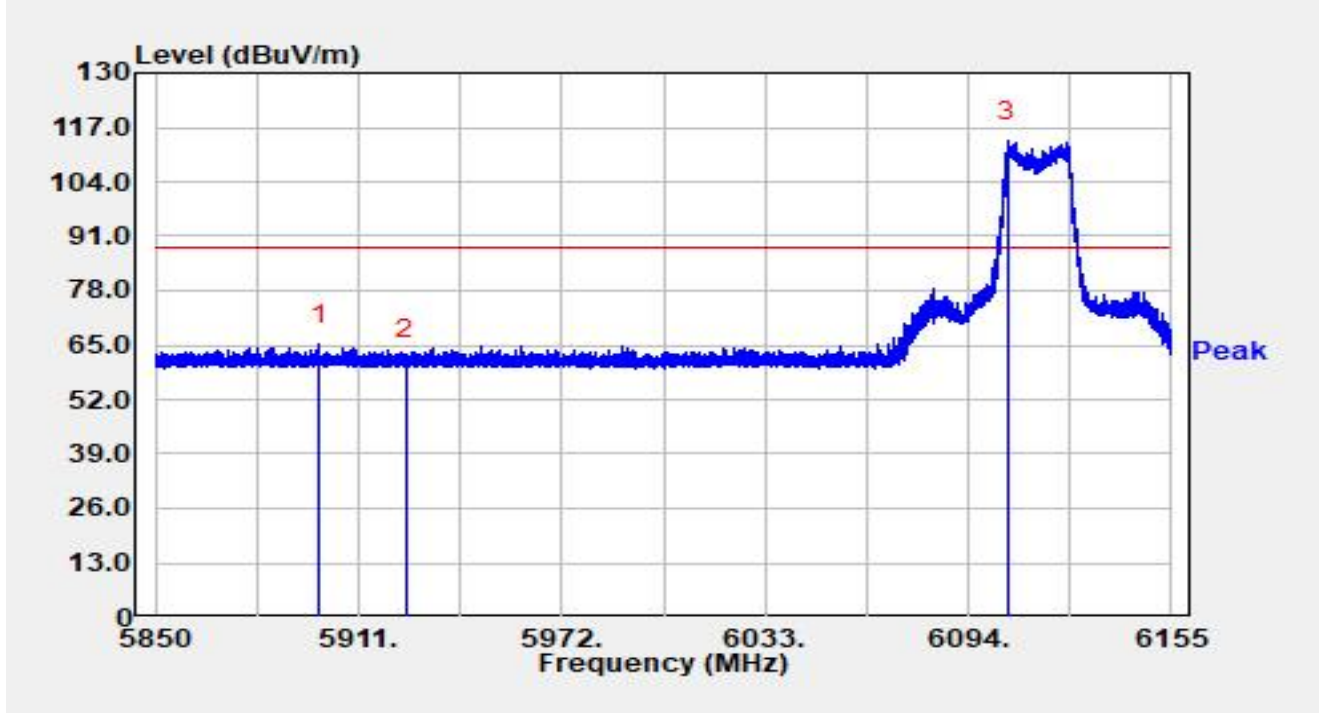


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5899.257	43.52	21.53	65.05	-23.15	88.20	Peak
2		5925.000	39.99	21.59	61.58	-26.62	88.20	Peak
3		6105.712	91.14	22.47	113.62	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz		

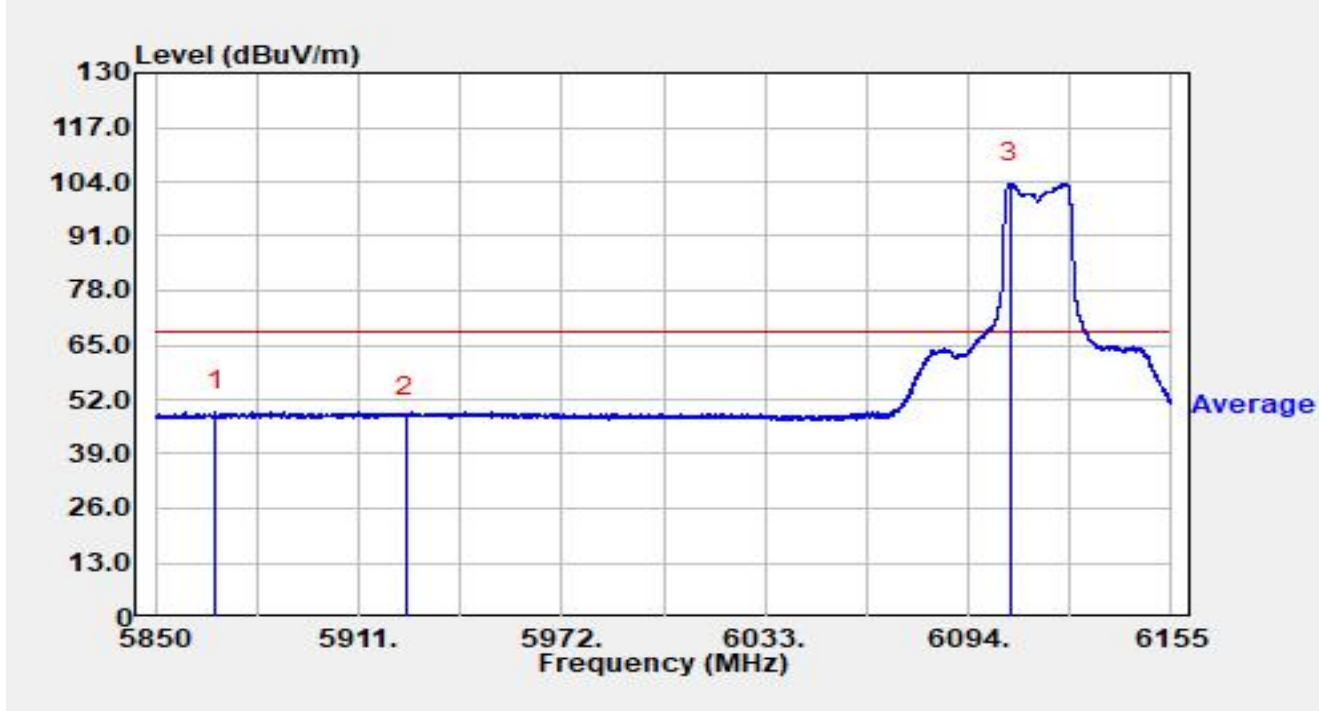


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5868.117	27.55	21.61	49.16	-19.04	68.20	Average
2		5925.000	26.42	21.59	48.01	-20.19	68.20	Average
3		6106.414	81.28	22.47	103.75	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz		

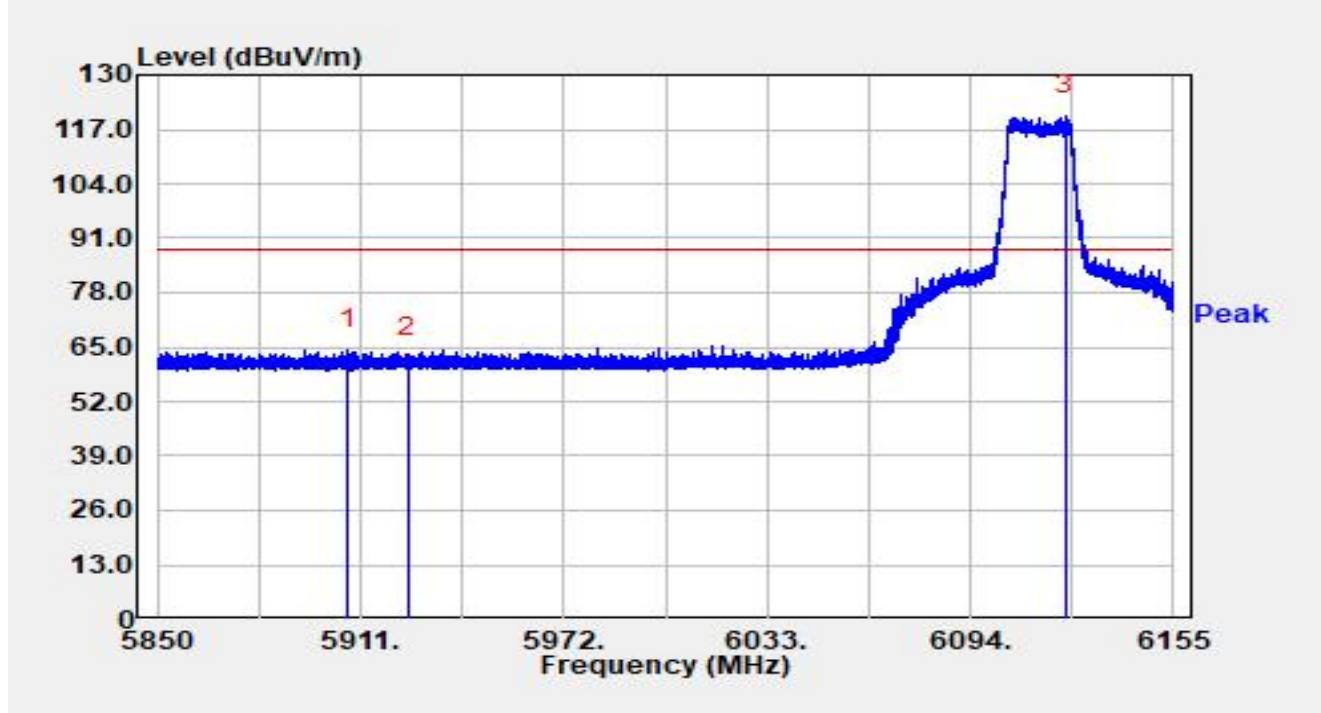


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5907.371	42.97	21.54	64.51	-23.69	88.20	Peak
2		5925.000	41.15	21.59	62.74	-25.46	88.20	Peak
3		6122.518	97.94	22.39	120.34	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz		

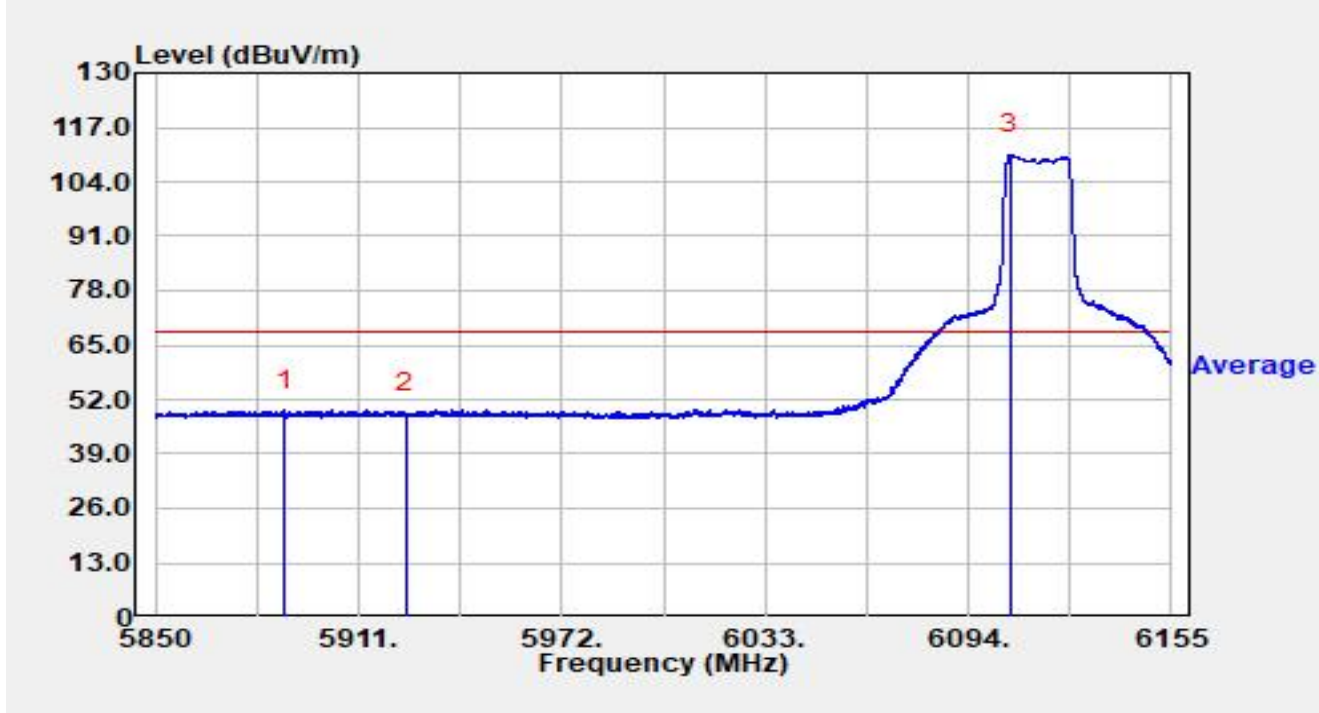


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5888.857	27.86	21.55	49.41	-18.79	68.20	Average
2		5925.000	26.98	21.59	48.57	-19.63	68.20	Average
3		6106.658	87.95	22.47	110.43	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz		

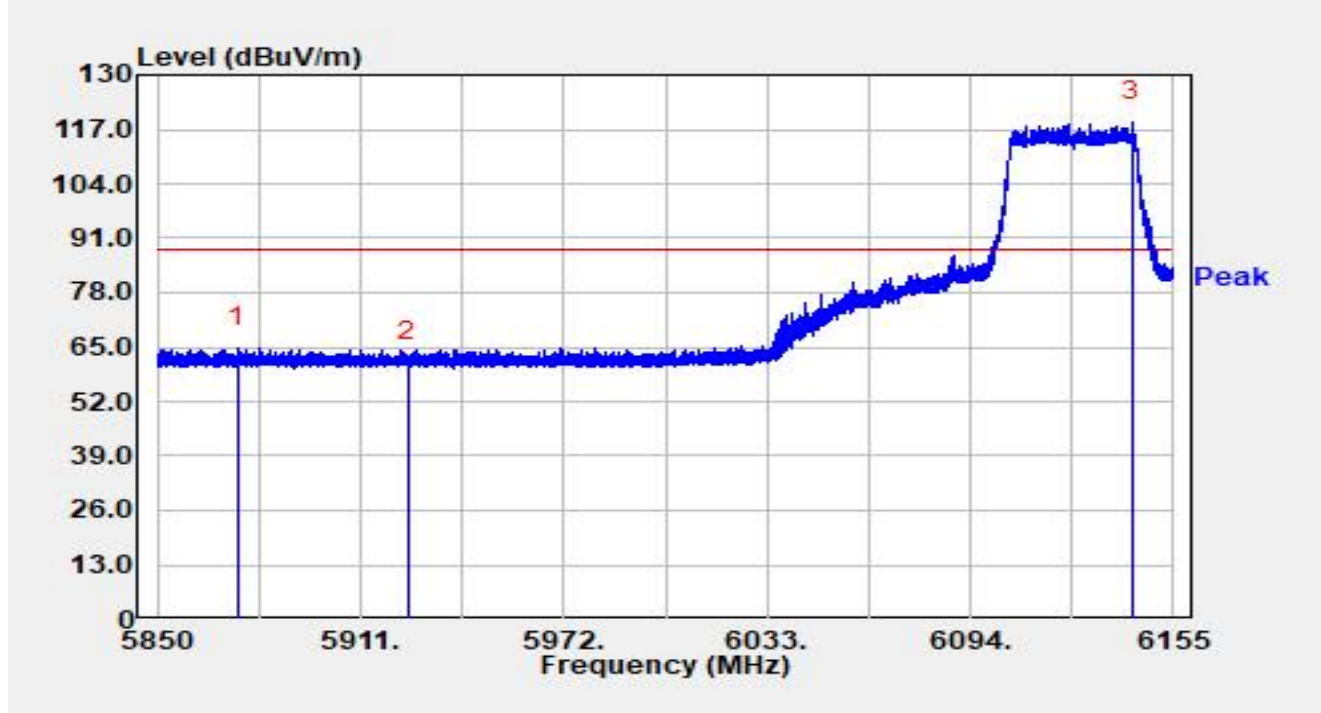


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5874.187	43.36	21.60	64.96	-23.24	88.20	Peak
2		5925.000	39.90	21.59	61.50	-26.70	88.20	Peak
3		6142.464	96.62	22.32	118.94	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz		

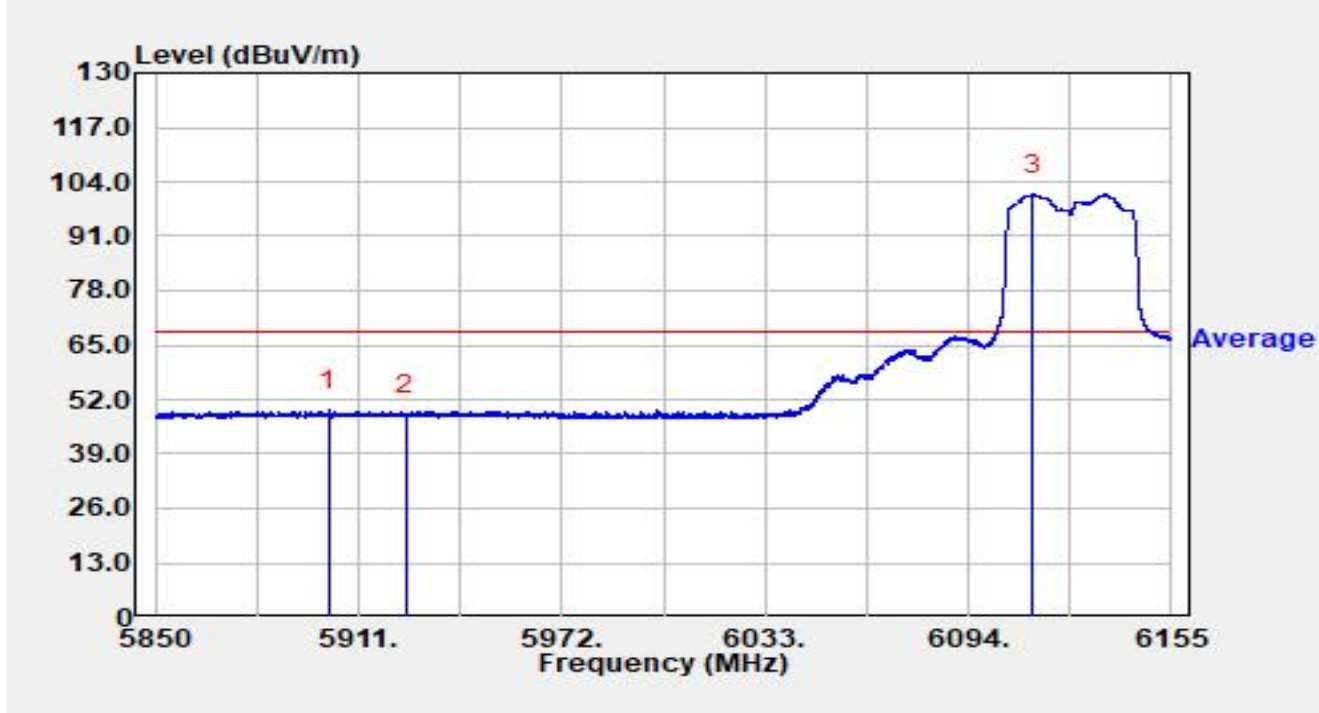


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5902.033	27.92	21.53	49.46	-18.74	68.20	Average
2		5925.000	26.82	21.59	48.41	-19.79	68.20	Average
3		6113.550	78.48	22.47	100.95	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz		

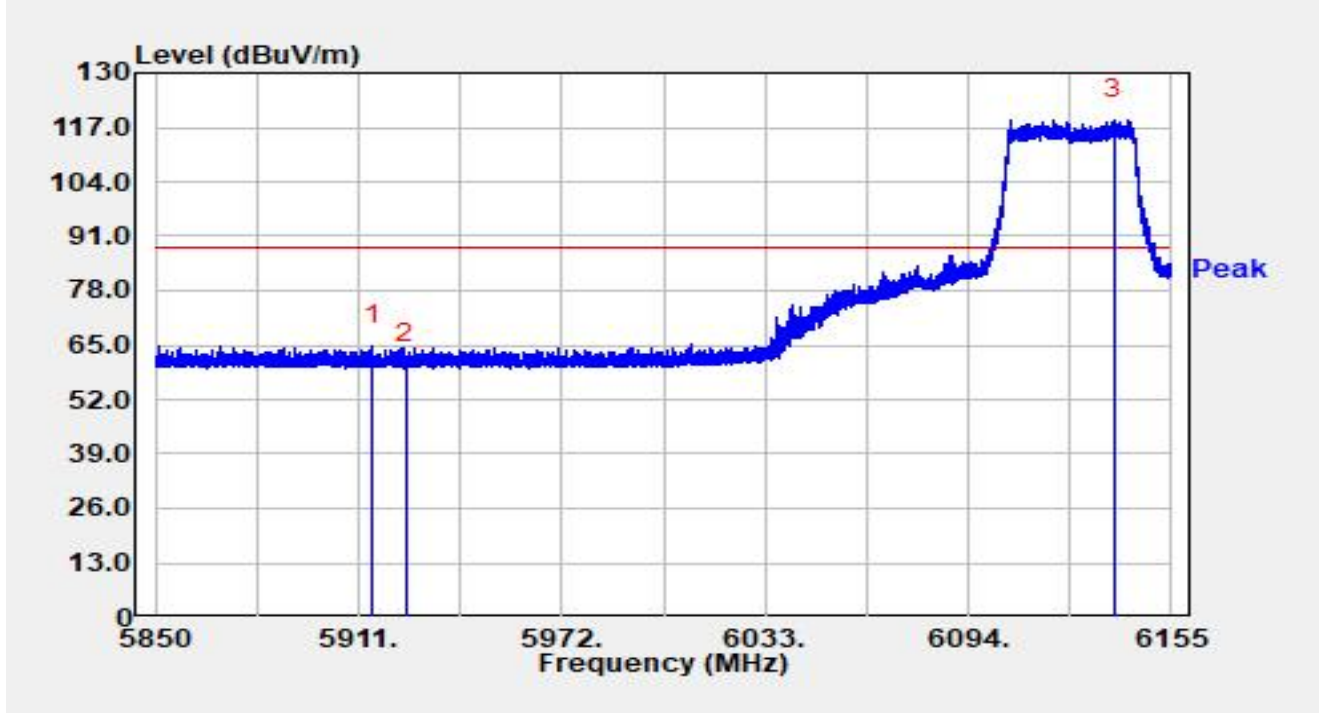


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.239	43.27	21.55	64.82	-23.38	88.20	Peak
2		5925.000	38.92	21.59	60.51	-27.69	88.20	Peak
3		6137.768	96.44	22.29	118.73	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz		

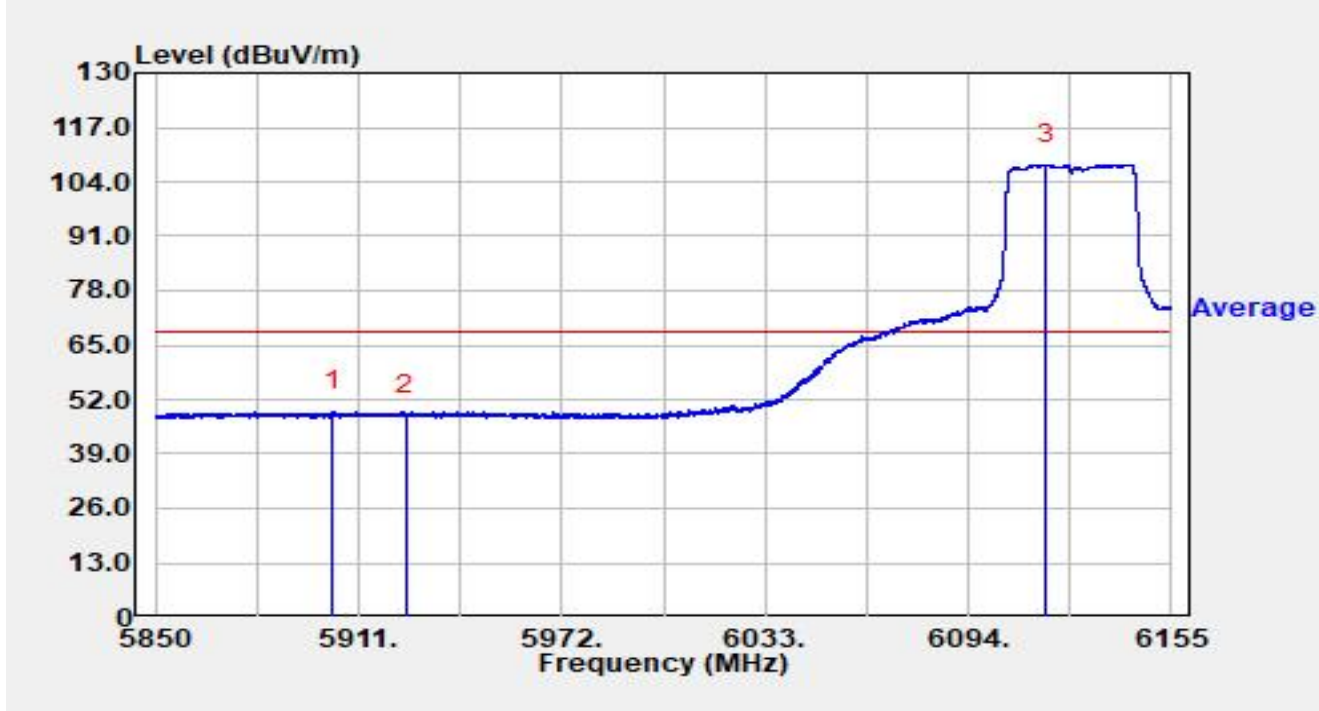


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5903.040	27.62	21.53	49.15	-19.05	68.20	Average
2		5925.000	26.64	21.59	48.23	-19.97	68.20	Average
3		6117.516	85.64	22.46	108.10	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz		

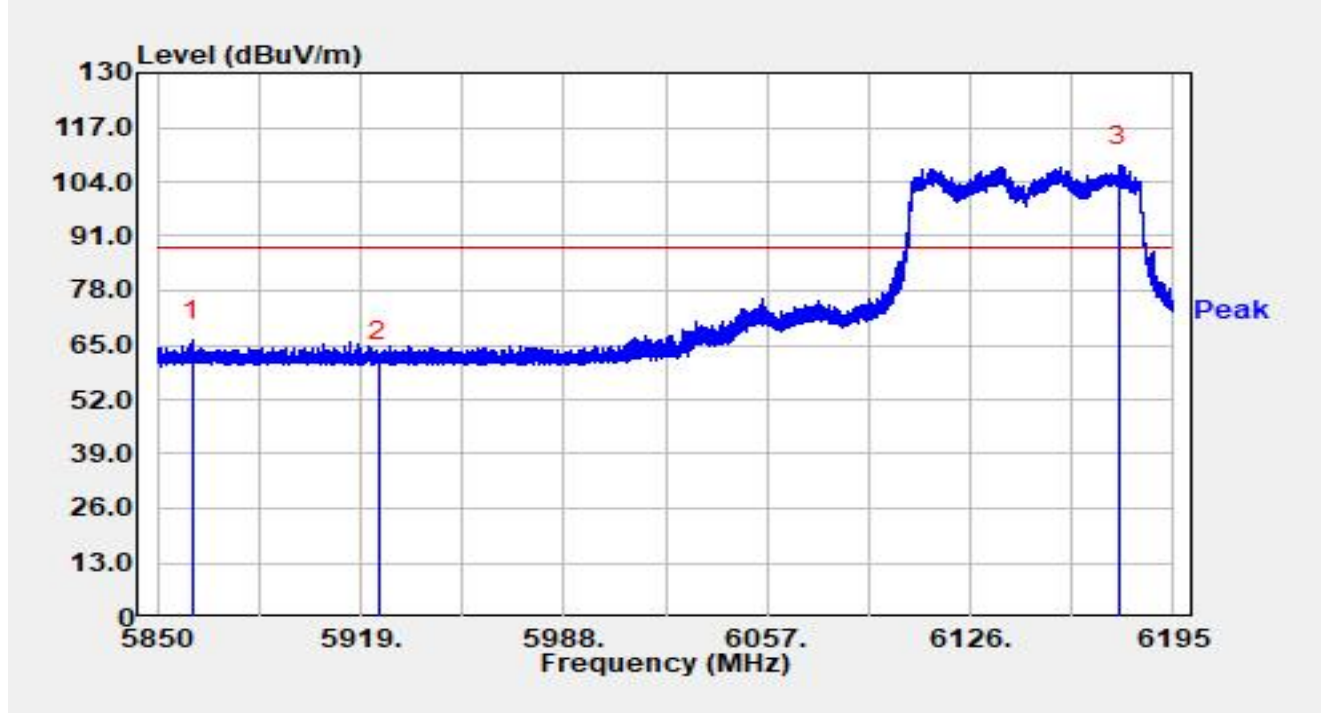


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5861.937	44.47	21.62	66.09	-22.11	88.20	Peak
2		5925.000	39.67	21.59	61.27	-26.93	88.20	Peak
3		6176.197	84.96	22.85	107.81	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz		

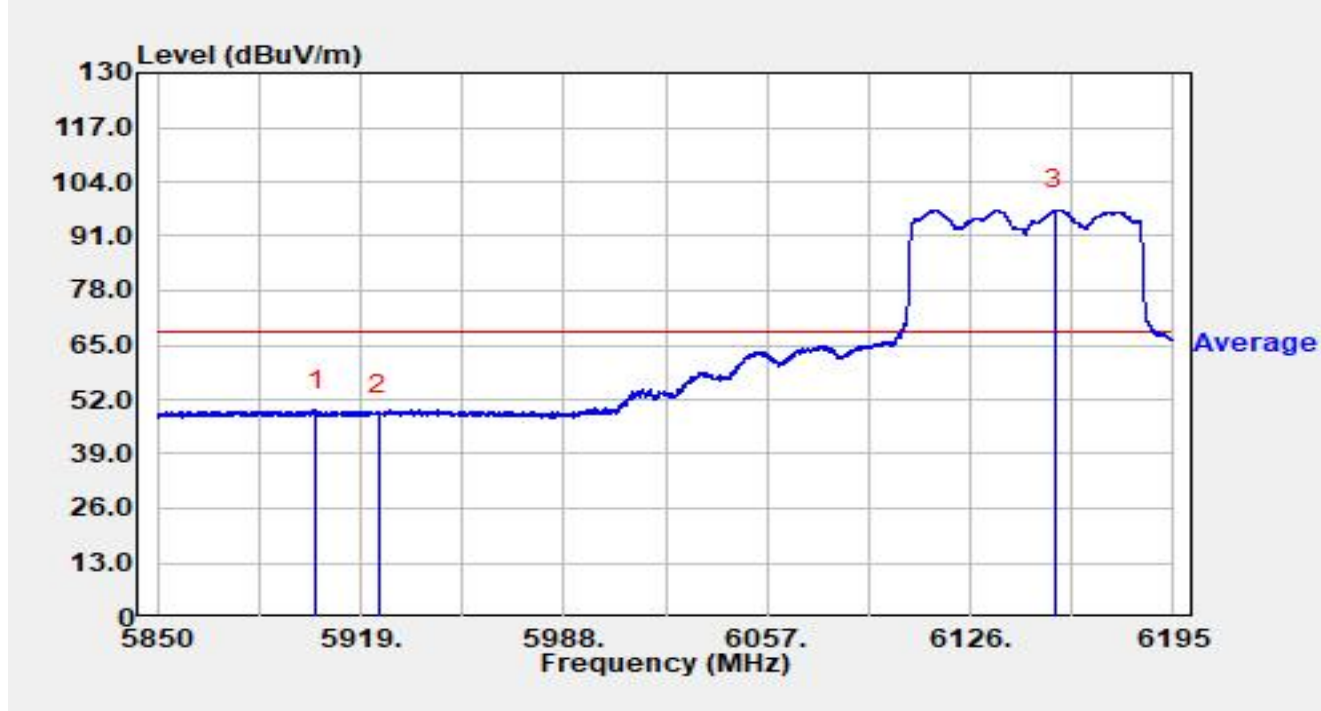


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5903.682	27.94	21.54	49.48	-18.72	68.20	Average
2		5925.000	26.86	21.59	48.45	-19.75	68.20	Average
3		6154.842	74.85	22.47	97.33	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz		

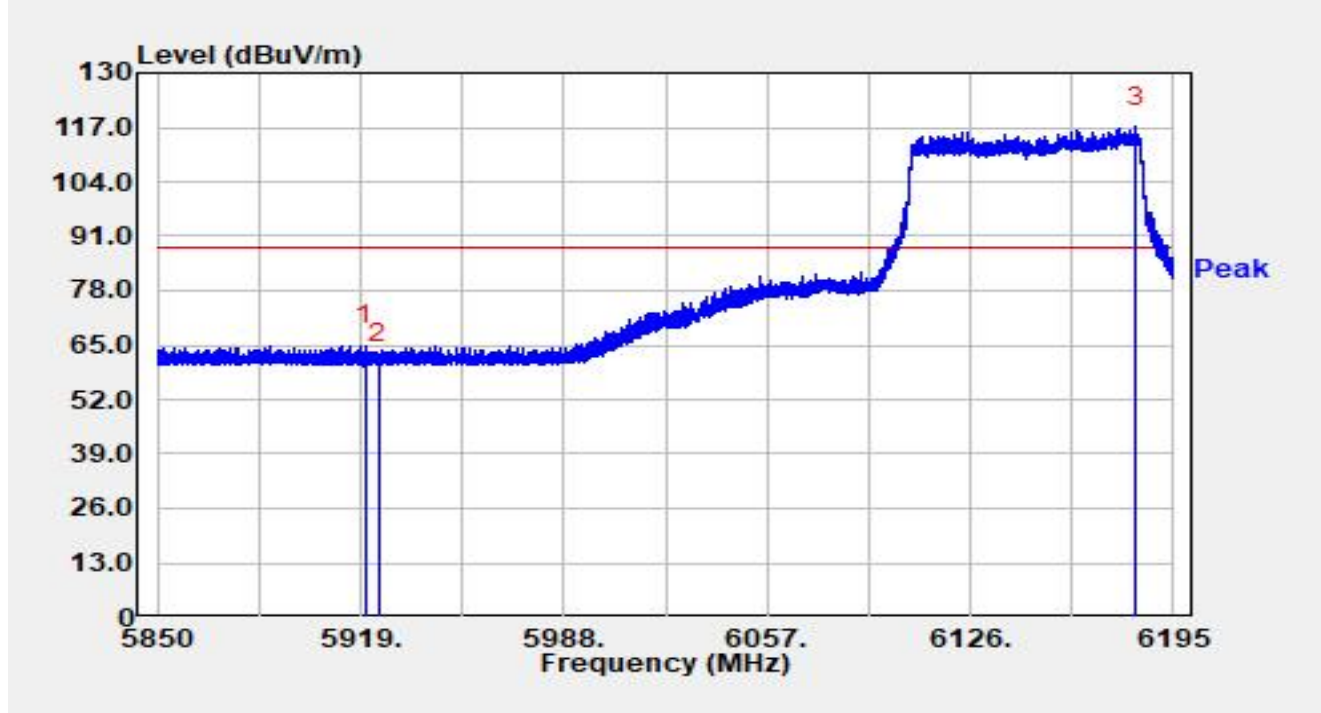


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.725	43.25	21.57	64.82	-23.38	88.20	Peak
2		5925.000	39.21	21.59	60.81	-27.39	88.20	Peak
3		6182.338	94.21	22.92	117.13	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz		

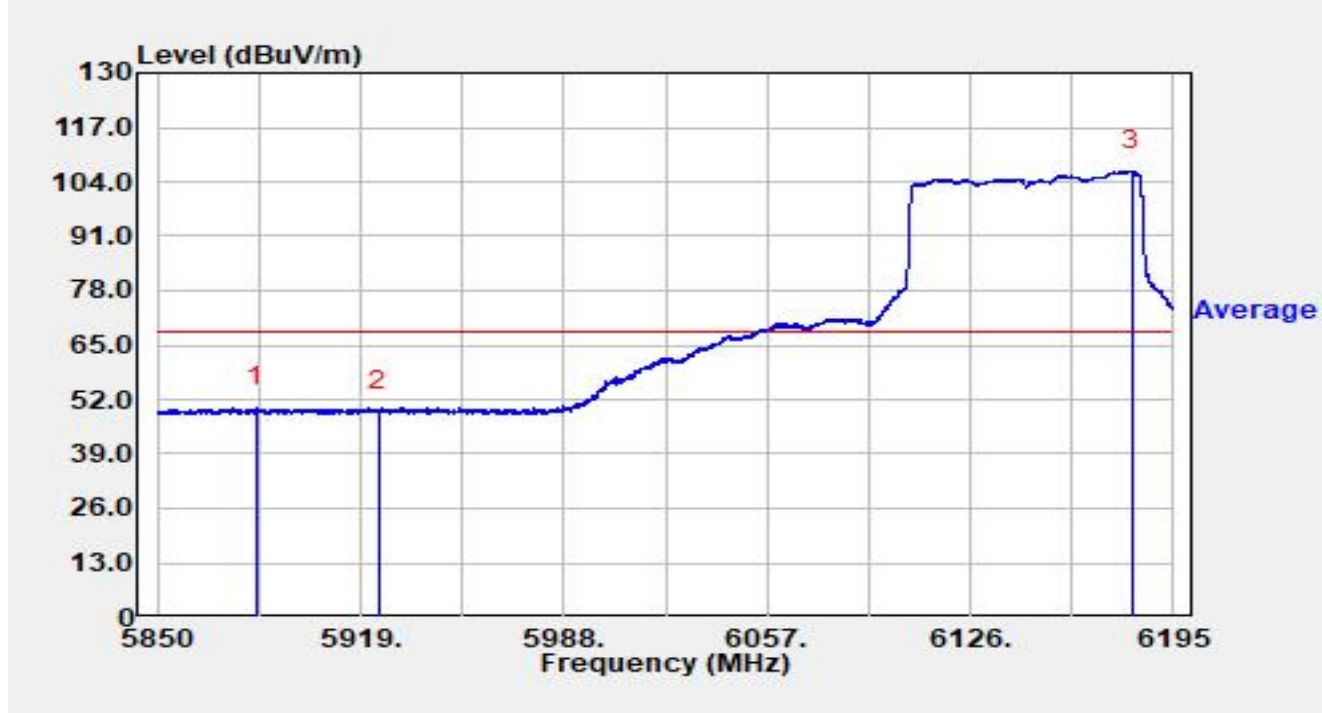


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5883.465	28.54	21.58	50.12	-18.08	68.20	Average
2		5925.000	27.48	21.59	49.08	-19.12	68.20	Average
3		6180.751	83.65	22.90	106.55	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz		

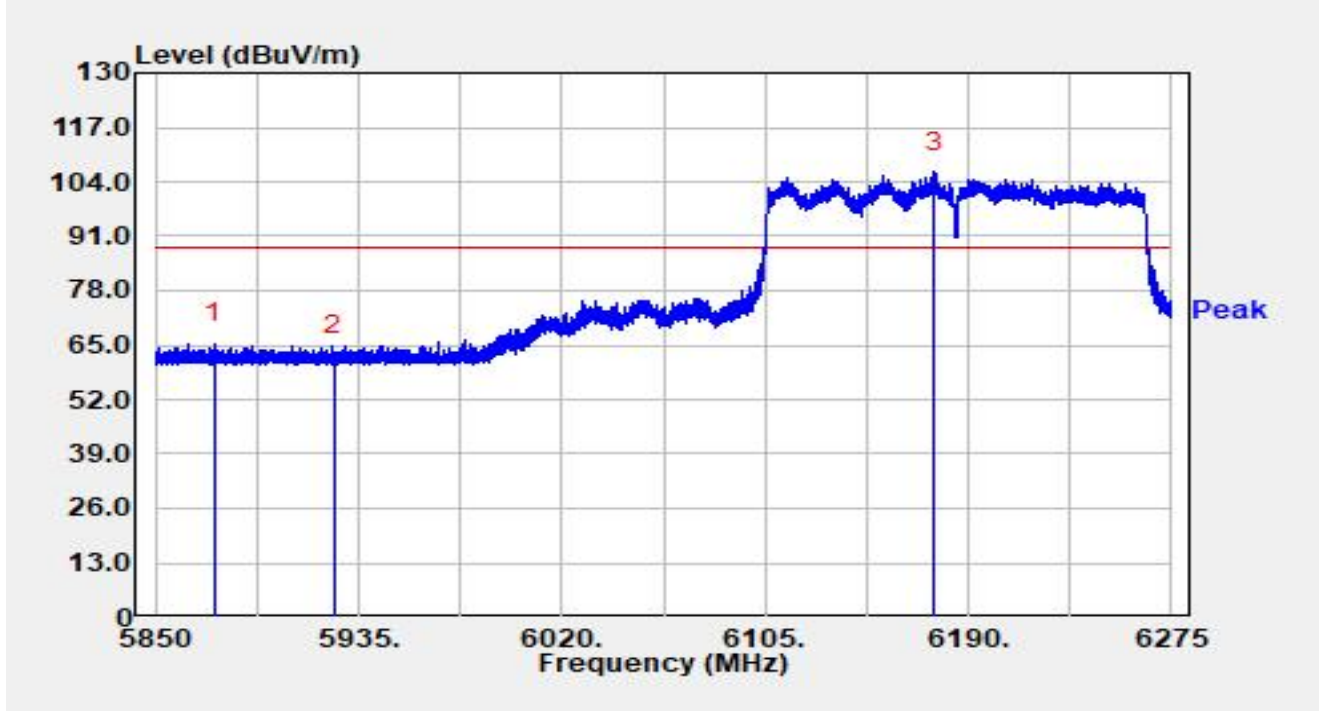


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5874.395	43.84	21.60	65.44	-22.76	88.20	Peak
2		5925.000	41.00	21.59	62.59	-25.61	88.20	Peak
3		6176.018	83.40	22.84	106.24	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz		

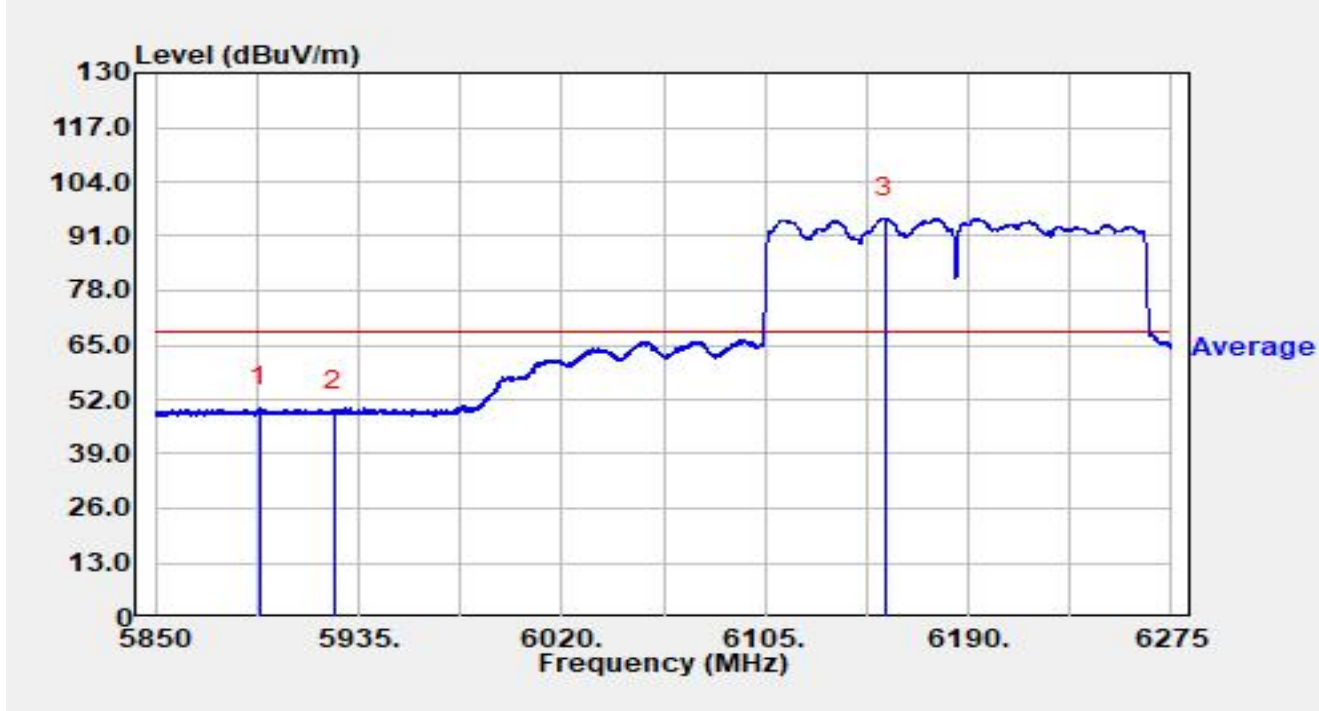


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5893.647	28.58	21.53	50.11	-18.09	68.20	Average
2		5925.000	27.49	21.59	49.08	-19.12	68.20	Average
3		6155.022	72.86	22.48	95.34	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz		

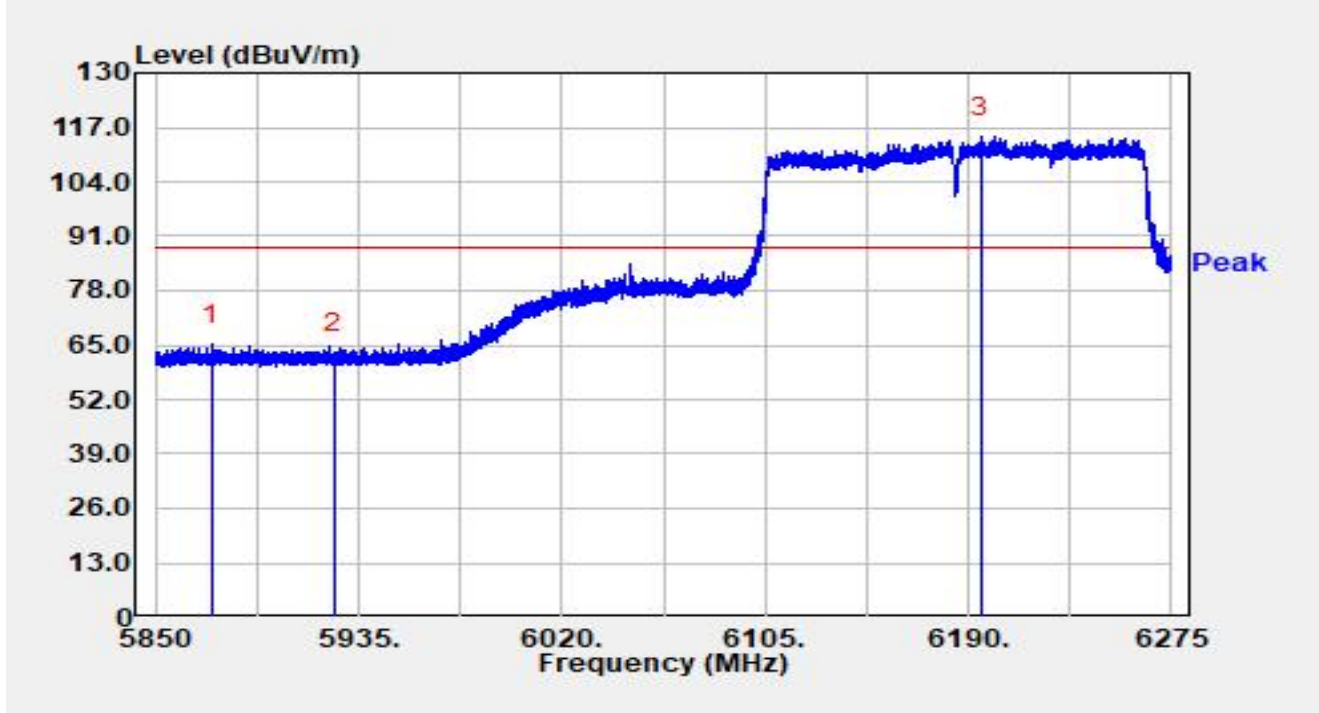


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5873.715	43.42	21.60	65.02	-23.18	88.20	Peak
2		5925.000	41.37	21.59	62.97	-25.23	88.20	Peak
3		6195.270	91.78	22.99	114.76	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz		

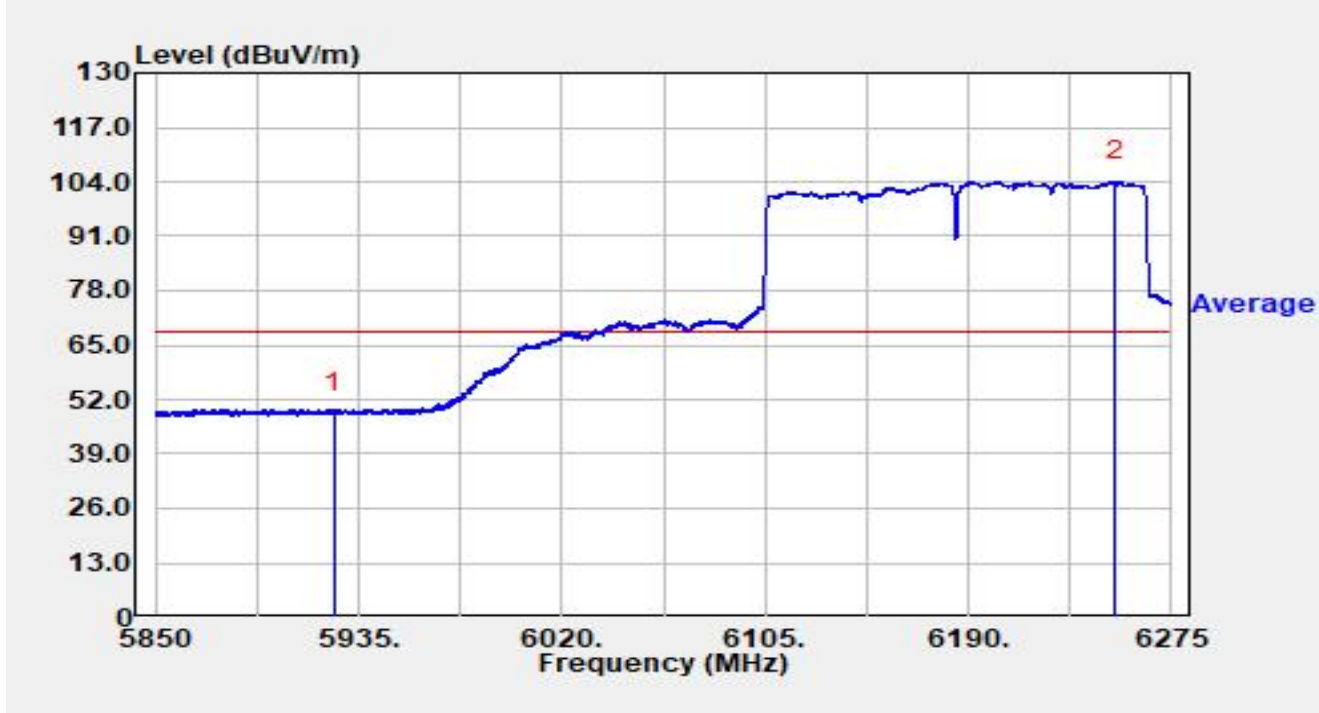


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	27.29	21.59	48.88	-19.32	68.20	Average
2		6251.285	81.57	22.67	104.24	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

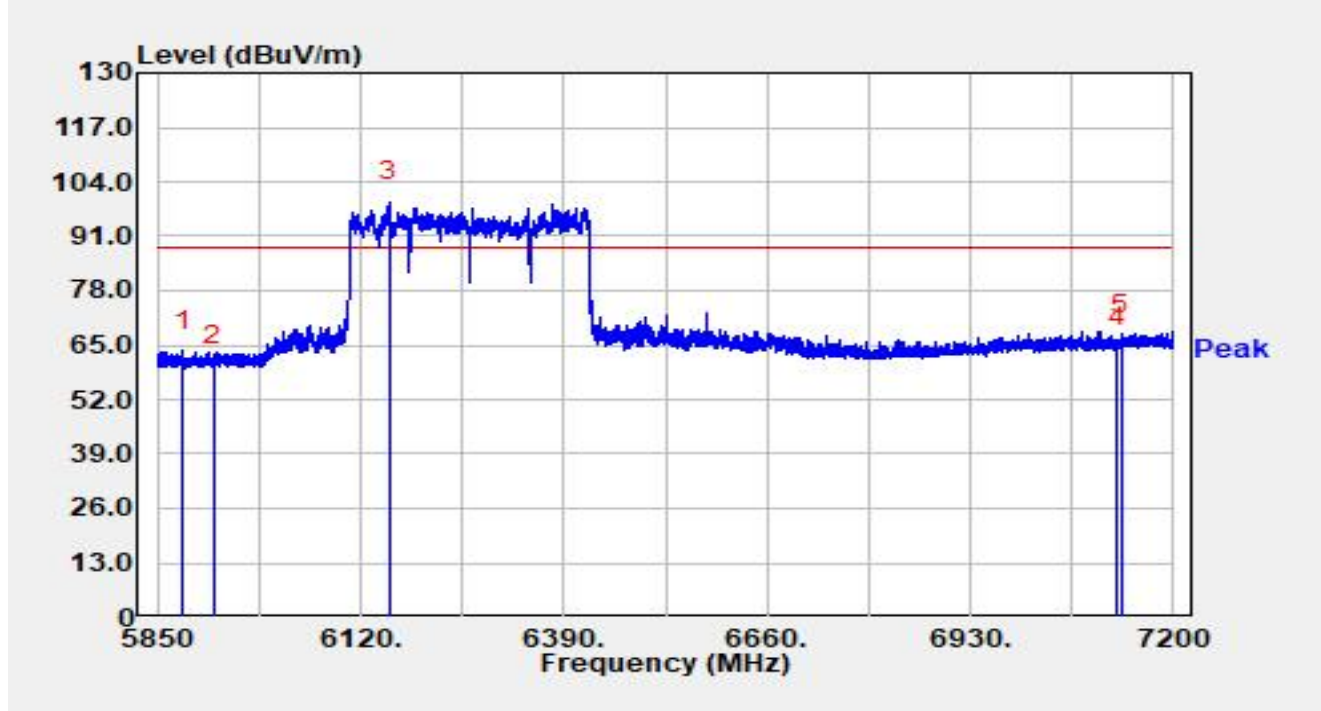


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5884.695	41.97	21.57	63.54	-24.66	88.20	Peak
2		5925.000	38.49	21.59	60.09	-28.11	88.20	Peak
3		6157.395	76.58	22.55	99.13	N/A	N/A	Peak
4		7125.000	37.67	26.94	64.61	-23.59	88.20	Peak
5	*	7129.935	40.44	27.04	67.48	-20.72	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Horizontal
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

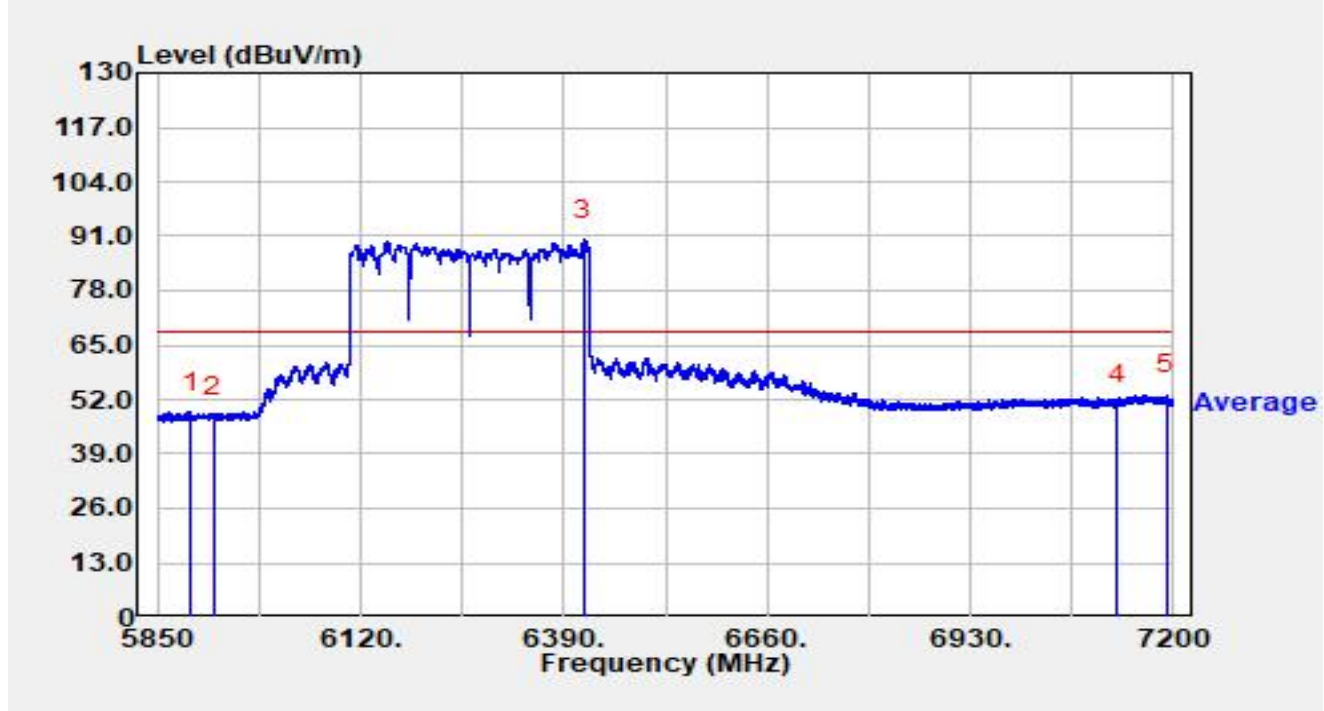


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5894.955	27.39	21.52	48.91	-19.29	68.20	Average
2		5925.000	26.25	21.59	47.85	-20.35	68.20	Average
3		6417.000	67.00	23.15	90.16	N/A	N/A	Average
4		7125.000	24.04	26.94	50.98	-17.22	68.20	Average
5	*	7190.685	26.15	26.97	53.12	-15.08	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

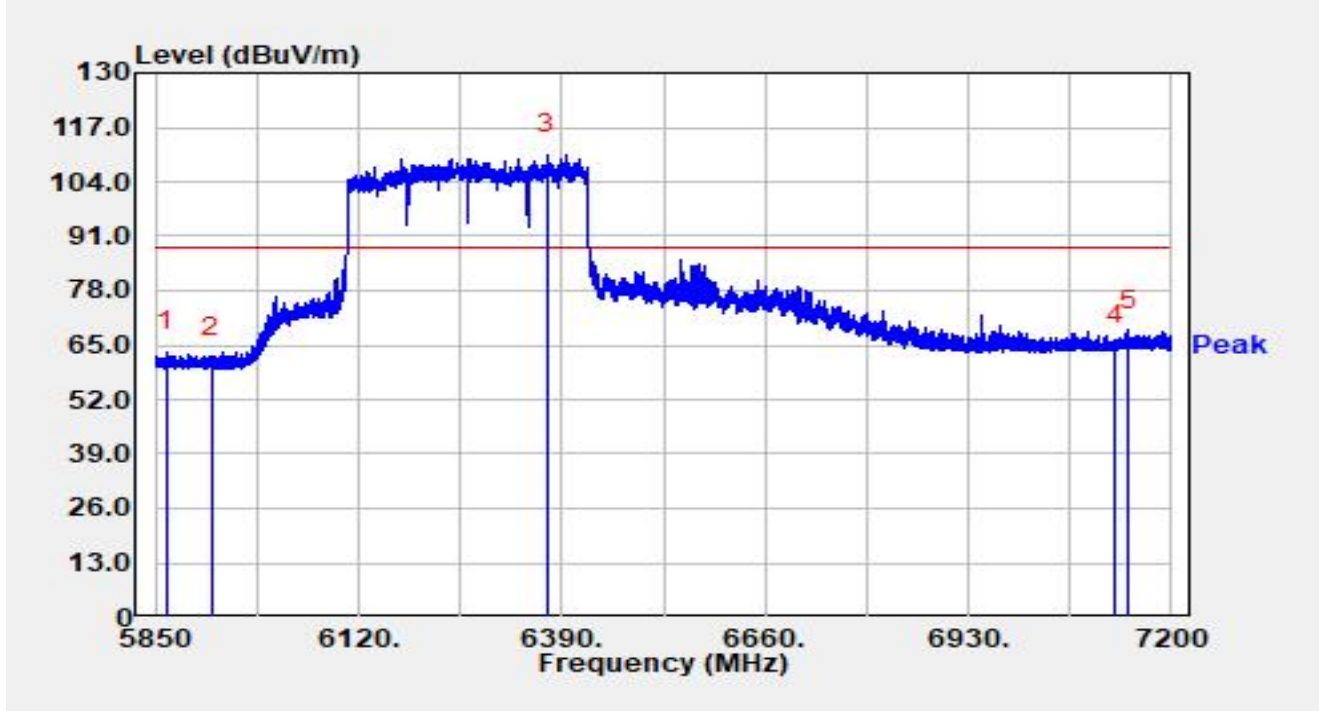


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5864.310	41.76	21.61	63.38	-24.82	88.20	Peak
2		5925.000	40.26	21.59	61.85	-26.35	88.20	Peak
3		6370.155	87.49	22.99	110.49	N/A	N/A	Peak
4		7125.000	37.83	26.94	64.77	-23.43	88.20	Peak
5	*	7143.435	41.37	27.23	68.61	-19.59	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-03-06
Limit	FCC_6G RE (3m)-AV	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01457	Polarity	Vertical
EUT	Deco BE65-Outdoor	Test Voltage	120v/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

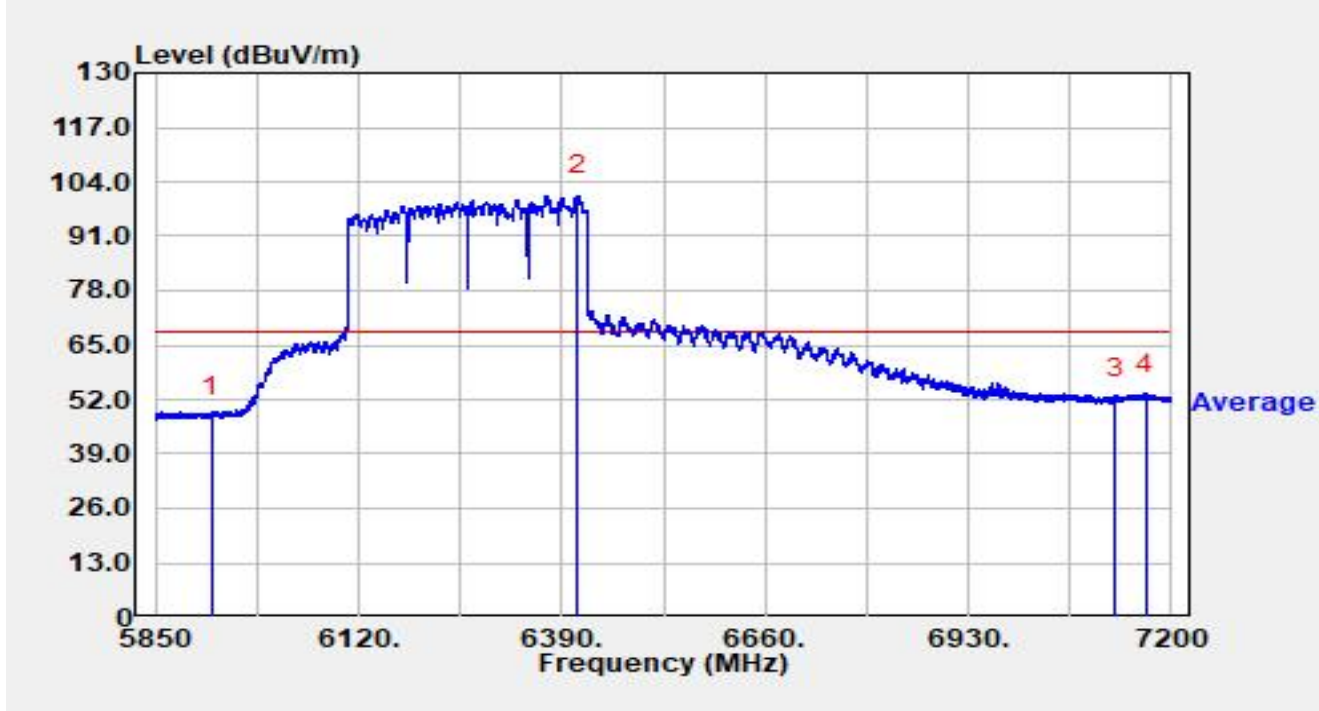


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5925.000	26.40	21.59	47.99	-20.21	68.20	Average
2		6410.115	77.67	23.08	100.75	N/A	N/A	Average
3		7125.000	25.30	26.94	52.24	-15.96	68.20	Average
4	*	7165.305	25.96	27.34	53.30	-14.90	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-03-13
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_C	Polarity	Line1
EUT	Deco BE65-Outdoor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 6115MHz		

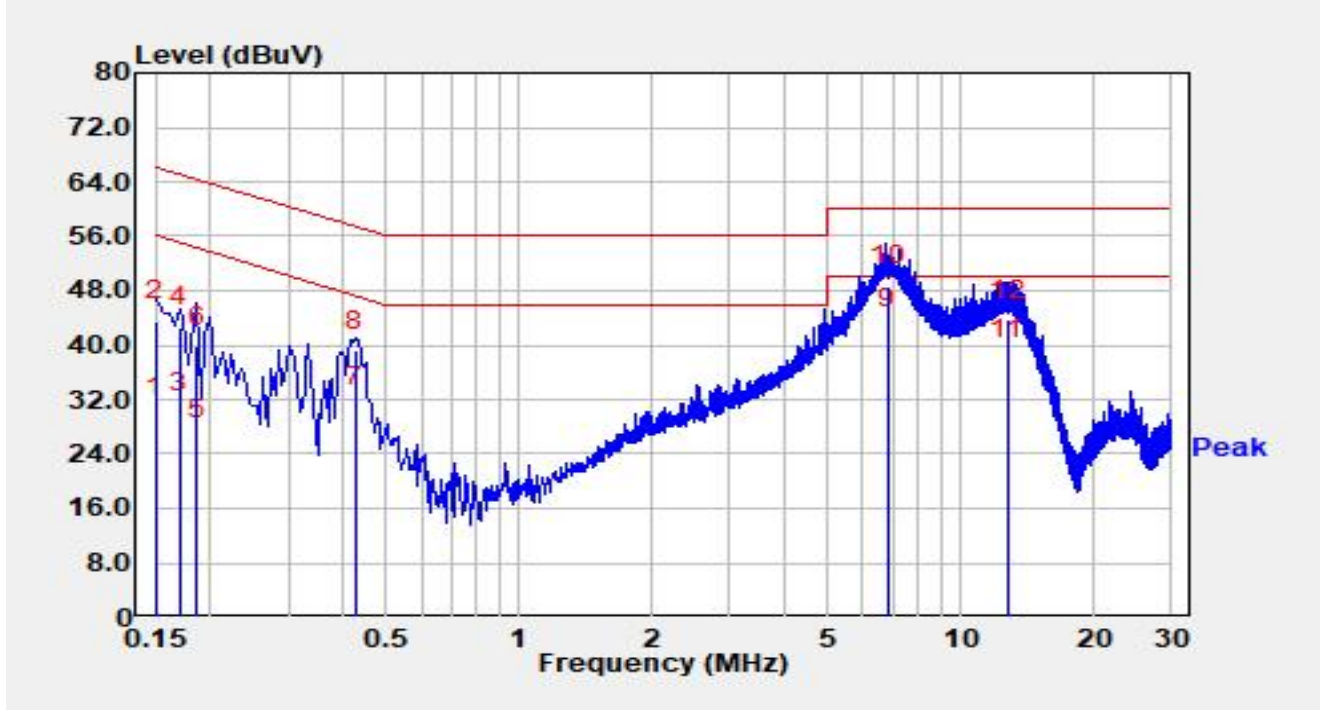


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	19.50	9.82	29.32	-26.68	56.00	Average
2		0.150	33.70	9.82	43.52	-22.48	66.00	QP
3		0.170	20.30	9.82	30.12	-24.84	54.96	Average
4		0.170	32.80	9.82	42.62	-22.34	64.96	QP
5		0.186	16.30	9.82	26.12	-28.10	54.21	Average
6		0.186	29.90	9.82	39.72	-24.50	64.21	QP
7		0.426	21.10	9.90	31.00	-16.33	47.33	Average
8		0.426	29.20	9.90	39.10	-18.23	57.33	QP
9	*	6.810	32.20	10.25	42.45	-7.55	50.00	Average
10		6.810	38.40	10.25	48.65	-11.35	60.00	QP
11		12.790	27.50	10.46	37.96	-12.04	50.00	Average
12		12.790	33.30	10.46	43.76	-16.24	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-03-13
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_C	Polarity	Neutral
EUT	Deco BE65-Outdoor	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 6115MHz		

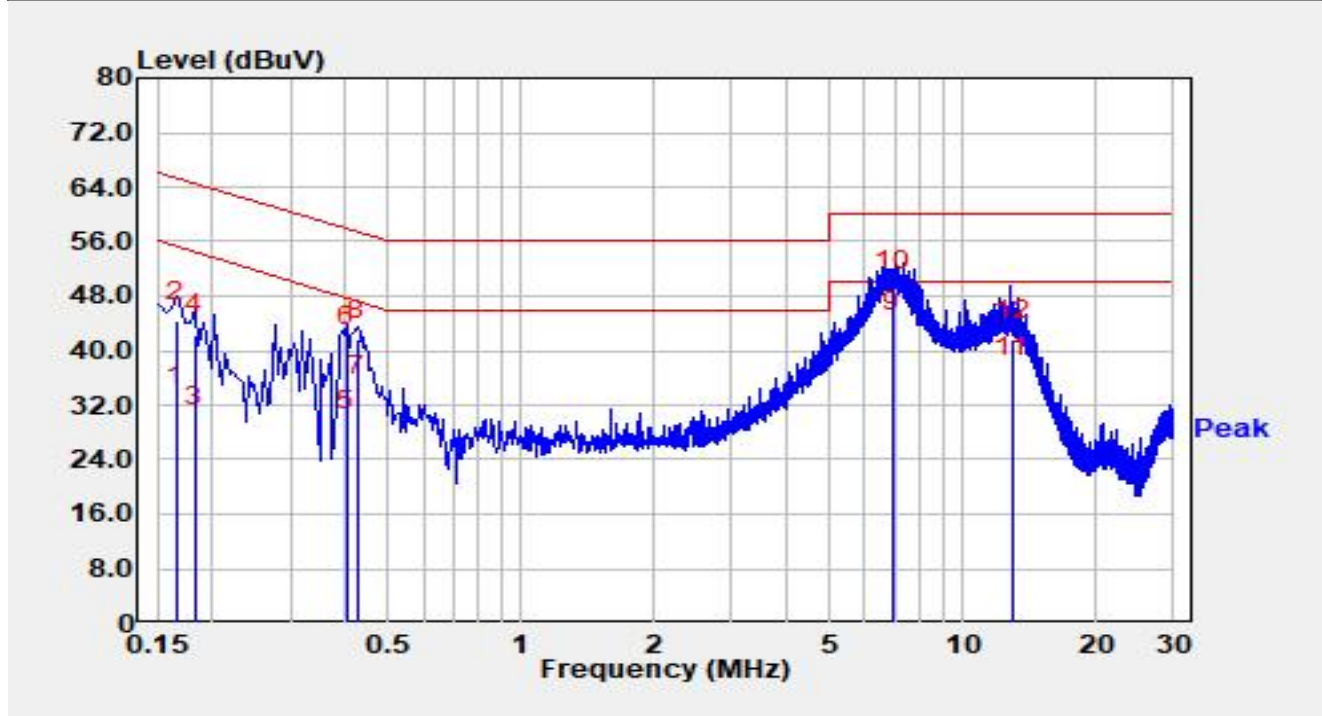

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.166	21.70	10.12	31.82	-23.34	55.16	Average
2		0.166	34.20	10.12	44.32	-20.84	65.16	QP
3		0.182	18.80	10.11	28.91	-25.48	54.39	Average
4		0.182	32.30	10.11	42.41	-21.98	64.39	QP
5		0.402	18.10	10.14	28.24	-19.58	47.81	Average
6		0.402	30.60	10.14	40.74	-17.08	57.81	QP
7		0.426	23.20	10.14	33.34	-13.99	47.33	Average
8		0.426	31.40	10.14	41.54	-15.79	57.33	QP
9	*	6.940	32.10	10.51	42.61	-7.39	50.00	Average
10		6.940	38.30	10.51	48.81	-11.19	60.00	QP
11		12.890	25.40	10.74	36.14	-13.86	50.00	Average
12		12.890	30.90	10.74	41.64	-18.36	60.00	QP

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).

3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1008026-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1008026-UE” file.

_____ The End _____