


|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

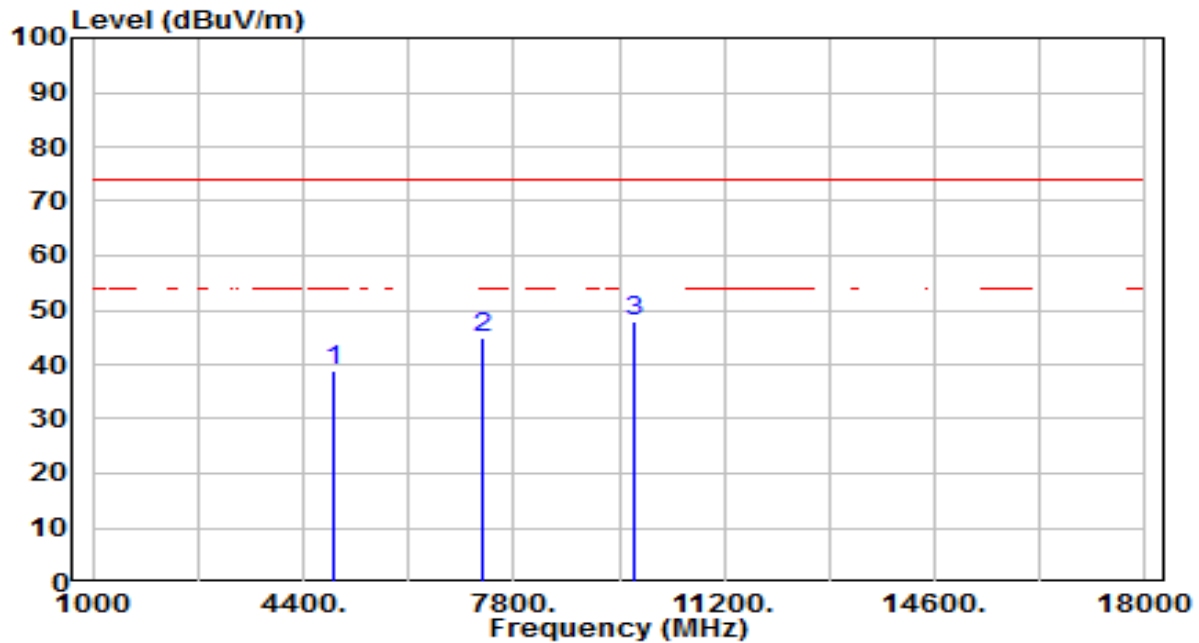


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874.000        | 35.17          | 3.84       | 39.01                | -34.99      | 74.00          | 200         | 26          | Peak              |
| 2  | 7311.000        | 33.13          | 11.94      | 45.07                | -28.93      | 74.00          | 200         | 50          | Peak              |
| 3  | * 9748.000      | 32.06          | 15.95      | 48.02                | -25.98      | 74.00          | 200         | 128         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

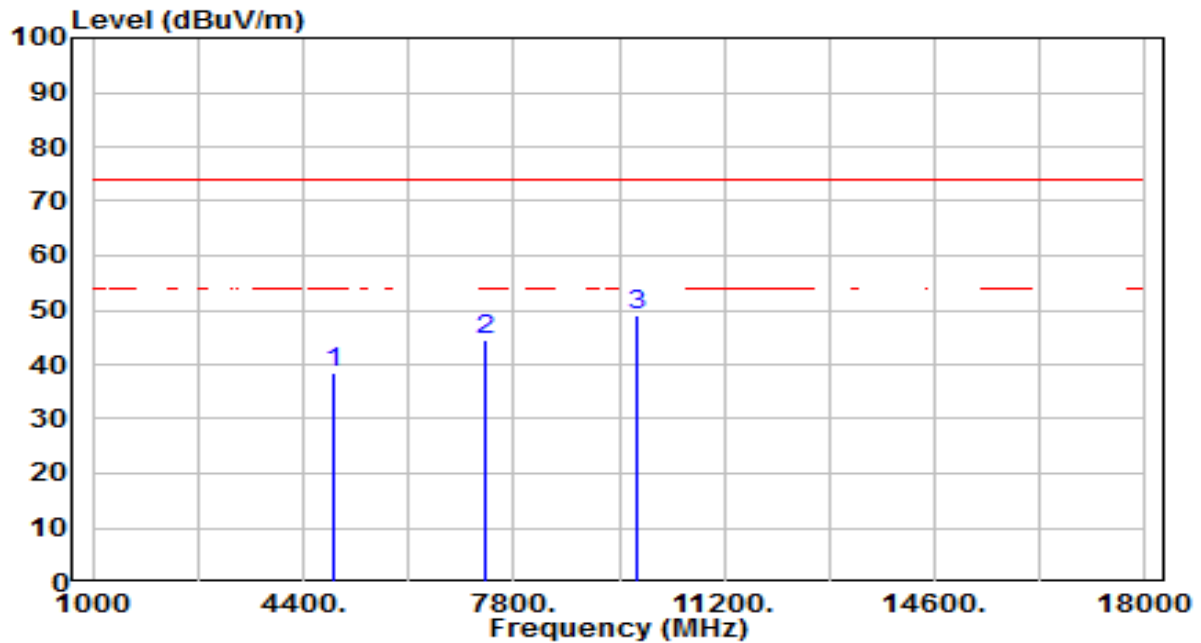


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4904.000        | 34.45          | 3.89       | 38.33                | -35.67      | 74.00          | 200         | 255         | Peak              |
| 2  |   | 7356.000        | 32.58          | 12.10      | 44.68                | -29.32      | 74.00          | 200         | 30          | Peak              |
| 3  | * | 9808.000        | 32.87          | 16.06      | 48.94                | -25.06      | 74.00          | 200         | 284         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

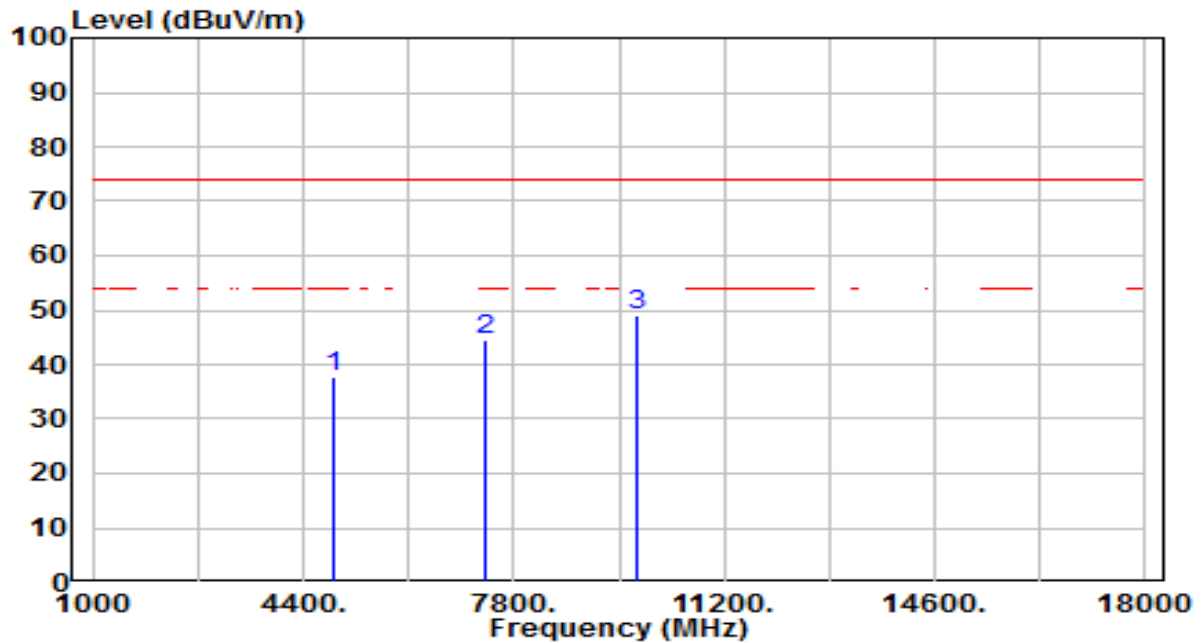


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4904.000        | 33.99          | 3.89       | 37.87                | -36.13      | 74.00          | 200         | 6           | Peak              |
| 2  |   | 7356.000        | 32.35          | 12.10      | 44.45                | -29.55      | 74.00          | 200         | 192         | Peak              |
| 3  | * | 9808.000        | 33.05          | 16.06      | 49.12                | -24.88      | 74.00          | 200         | 62          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

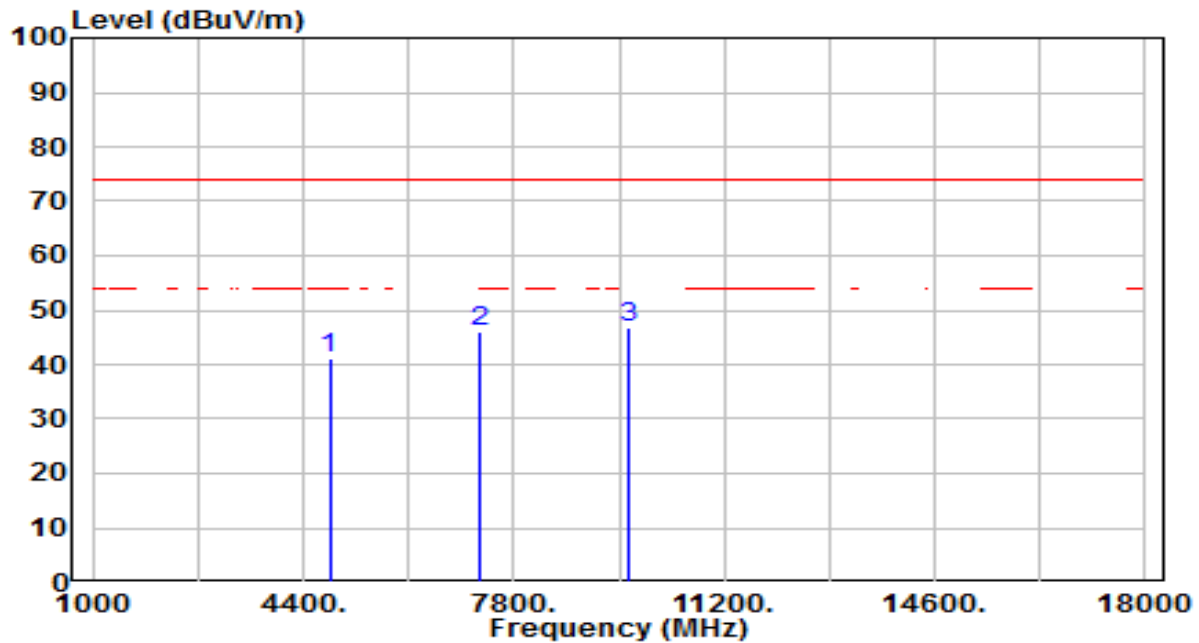


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824.000        | 37.25          | 3.75       | 40.99                | -33.01      | 74.00          | 200         | 340         | Peak              |
| 2  | 7236.000        | 34.52          | 11.68      | 46.20                | -27.80      | 74.00          | 200         | 13          | Peak              |
| 3  | * 9648.000      | 31.10          | 15.77      | 46.87                | -27.13      | 74.00          | 200         | 101         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

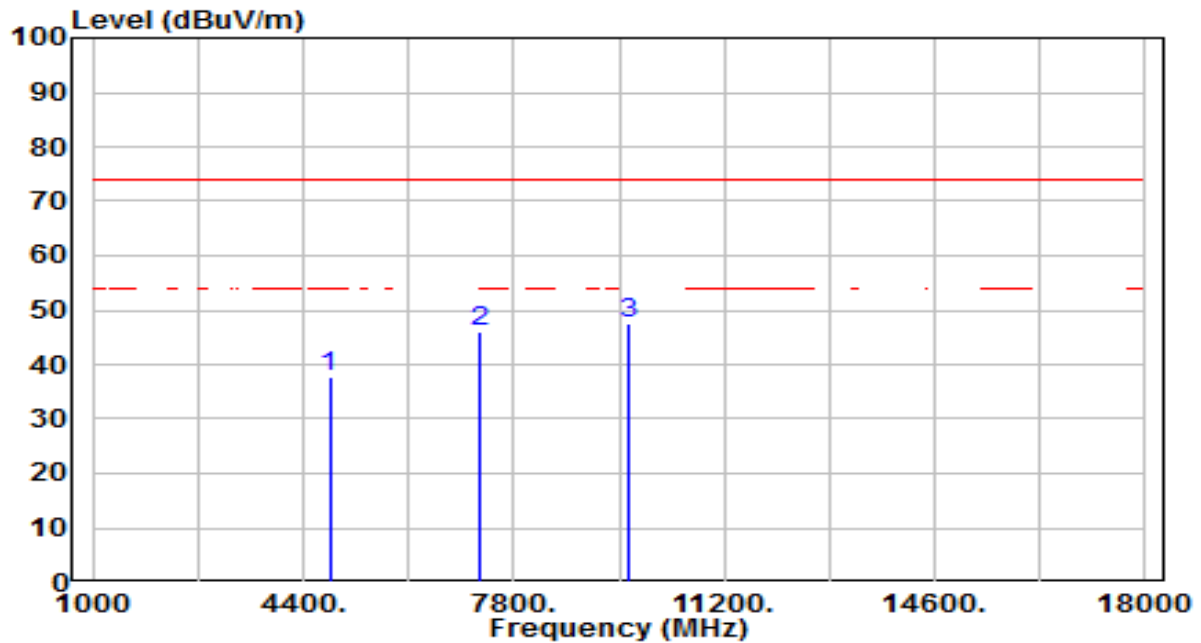


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4824.000        | 34.00          | 3.75       | 37.75                | -36.25      | 74.00          | 200         | 241         | Peak              |
| 2  | 7236.000        | 34.50          | 11.68      | 46.17                | -27.83      | 74.00          | 200         | 81          | Peak              |
| 3  | * 9648.000      | 31.77          | 15.77      | 47.54                | -26.46      | 74.00          | 200         | 116         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

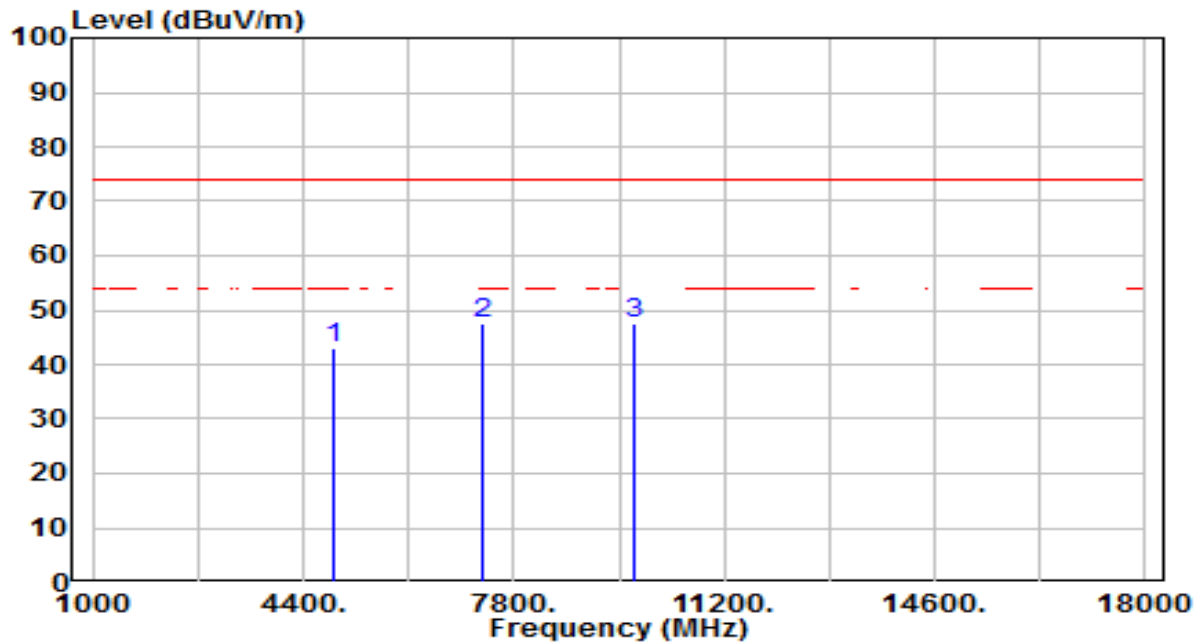


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874.000        | 39.10          | 3.84       | 42.93                | -31.07      | 74.00          | 200         | 334         | Peak              |
| 2  | 7311.000        | 35.55          | 11.94      | 47.49                | -26.51      | 74.00          | 200         | 16          | Peak              |
| 3  | * 9748.000      | 31.77          | 15.95      | 47.73                | -26.27      | 74.00          | 200         | 282         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

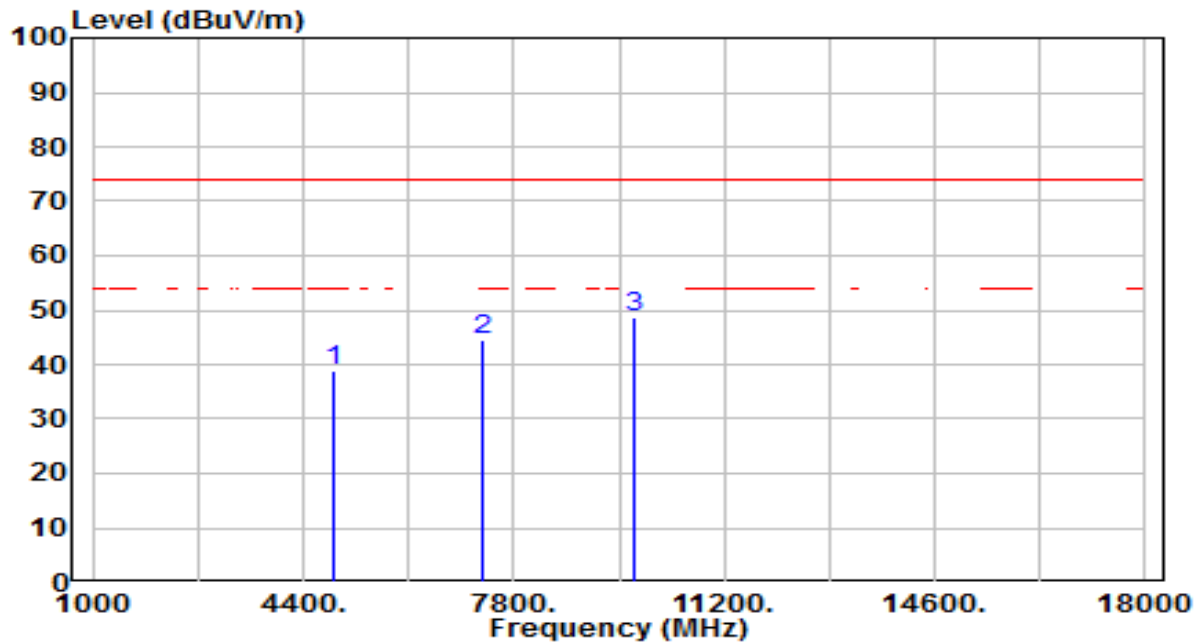


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4874.000        | 34.90          | 3.84       | 38.73                | -35.27      | 74.00          | 200         | 214         | Peak              |
| 2  |   | 7311.000        | 32.58          | 11.94      | 44.52                | -29.48      | 74.00          | 200         | 172         | Peak              |
| 3  | * | 9748.000        | 32.62          | 15.95      | 48.58                | -25.42      | 74.00          | 200         | 6           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

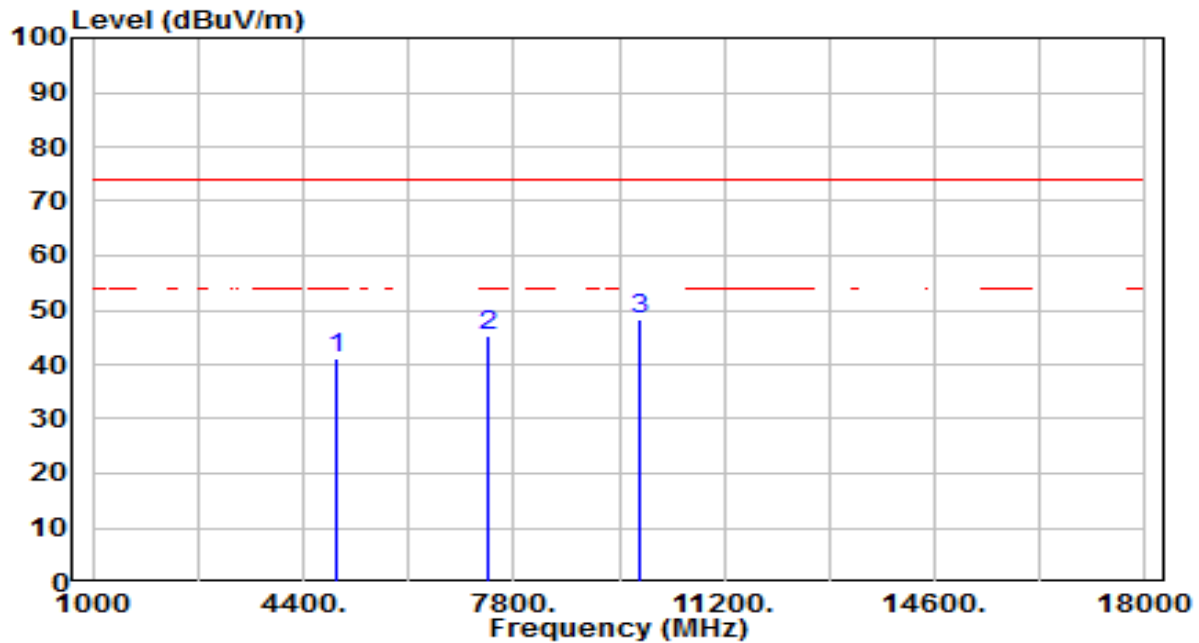


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924.000        | 37.07          | 3.92       | 41.00                | -33.00      | 74.00          | 200         | 346         | Peak              |
| 2  | 7386.000        | 32.94          | 12.21      | 45.14                | -28.86      | 74.00          | 200         | 13          | Peak              |
| 3  | * 9848.000      | 32.30          | 16.14      | 48.44                | -25.56      | 74.00          | 200         | 321         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

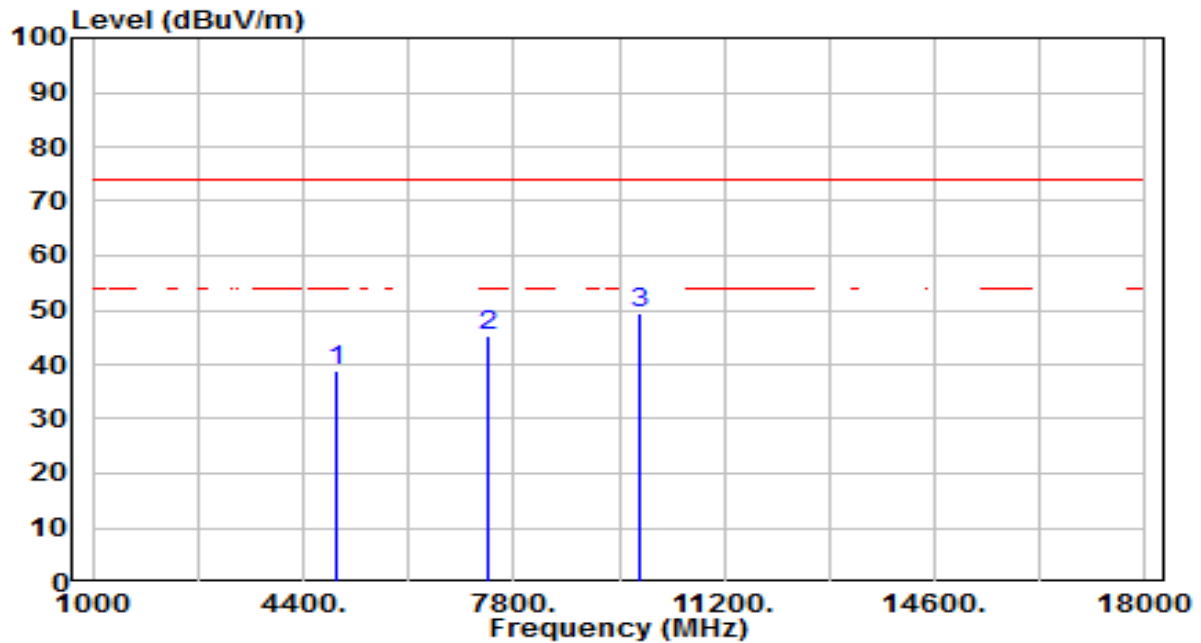


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4924.000        | 34.83          | 3.92       | 38.75                | -35.25      | 74.00          | 200         | 164         | Peak              |
| 2  | 7386.000        | 32.97          | 12.21      | 45.17                | -28.83      | 74.00          | 200         | 65          | Peak              |
| 3  | * 9848.000      | 33.42          | 16.14      | 49.56                | -24.44      | 74.00          | 200         | 100         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

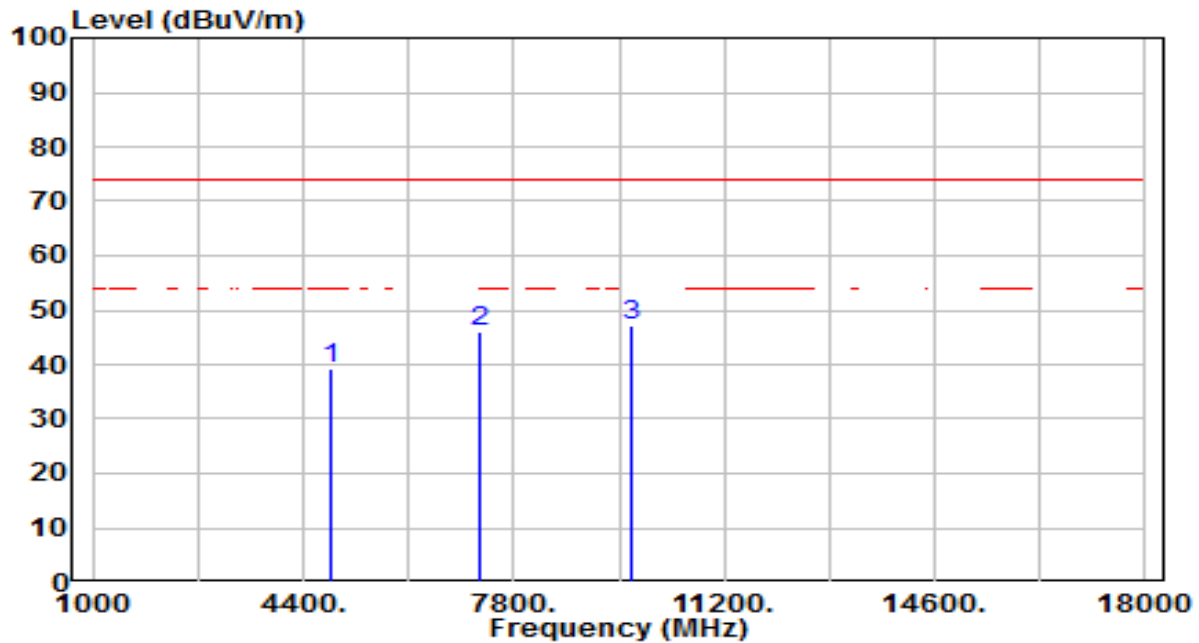


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4844.000        | 35.41          | 3.78       | 39.20                | -34.80      | 74.00          | 200         | 342         | Peak              |
| 2  |   | 7266.000        | 34.28          | 11.78      | 46.06                | -27.94      | 74.00          | 200         | 102         | Peak              |
| 3  | * | 9688.000        | 31.33          | 15.84      | 47.17                | -26.83      | 74.00          | 200         | 214         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

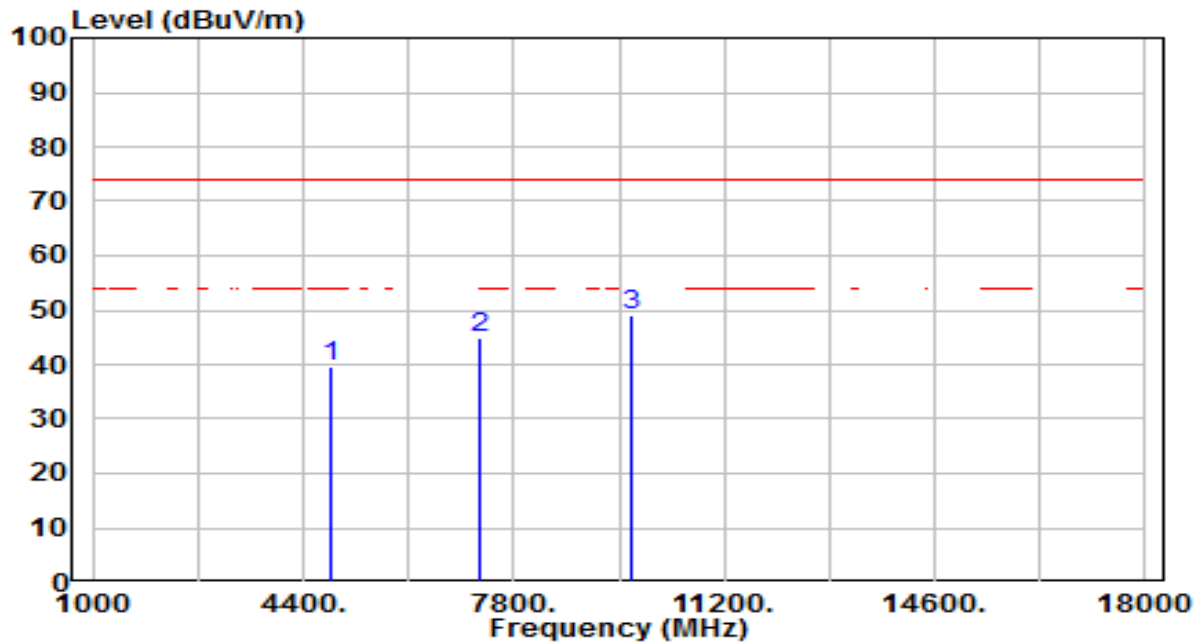


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4844.000        | 35.95          | 3.78       | 39.73                | -34.27      | 74.00          | 200         | 83          | Peak              |
| 2  |   | 7266.000        | 33.07          | 11.78      | 44.85                | -29.15      | 74.00          | 200         | 249         | Peak              |
| 3  | * | 9688.000        | 33.12          | 15.84      | 48.96                | -25.04      | 74.00          | 200         | 173         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

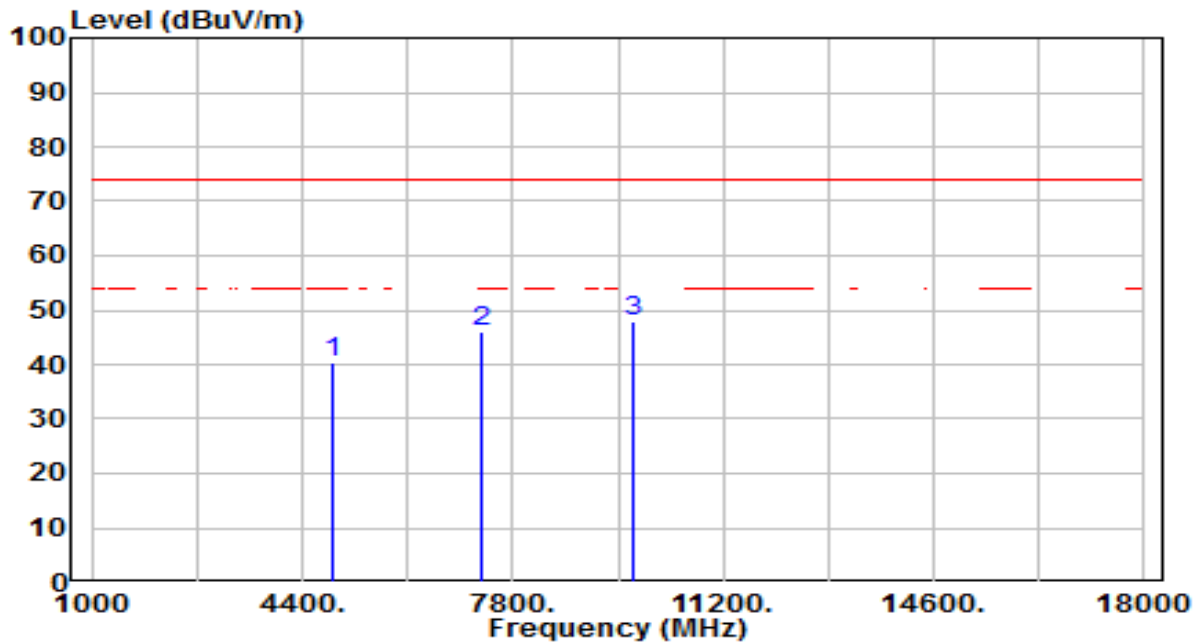


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4874.000        | 36.65          | 3.84       | 40.49                | -33.51      | 74.00          | 200         | 12          | Peak              |
| 2  | 7311.000        | 34.24          | 11.94      | 46.19                | -27.81      | 74.00          | 200         | 20          | Peak              |
| 3  | * 9748.000      | 31.96          | 15.95      | 47.91                | -26.09      | 74.00          | 200         | 87          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

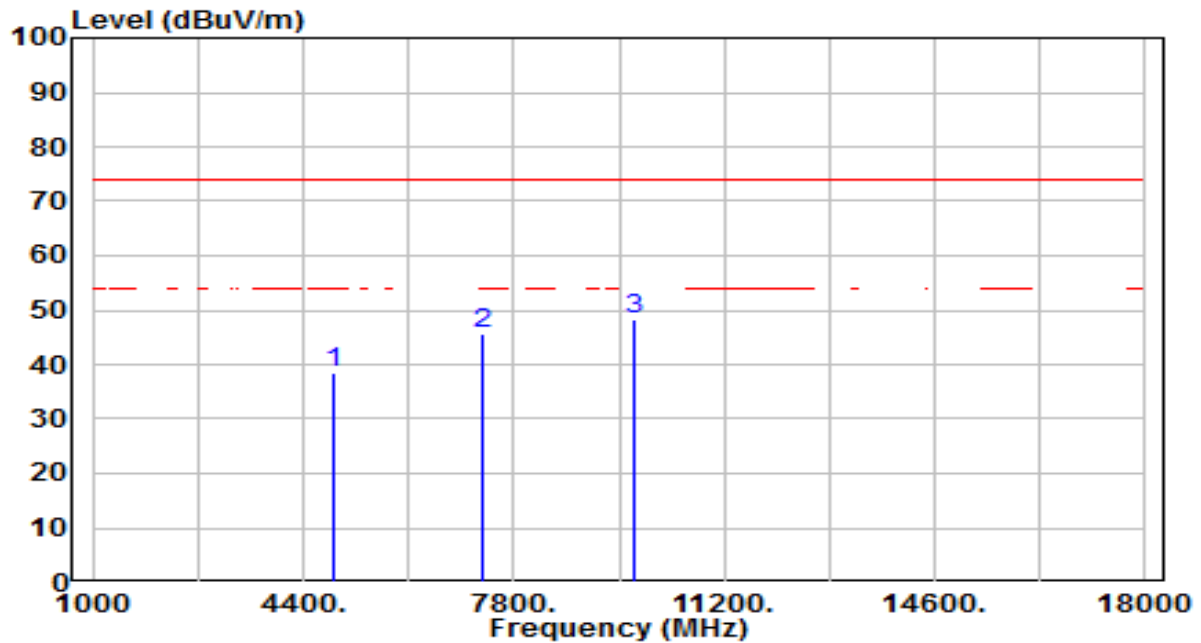


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4874.000        | 34.51          | 3.84       | 38.34                | -35.66      | 74.00          | 200         | 17          | Peak              |
| 2  |   | 7311.000        | 33.57          | 11.94      | 45.51                | -28.49      | 74.00          | 200         | 98          | Peak              |
| 3  | * | 9748.000        | 32.28          | 15.95      | 48.23                | -25.77      | 74.00          | 200         | 87          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 9_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

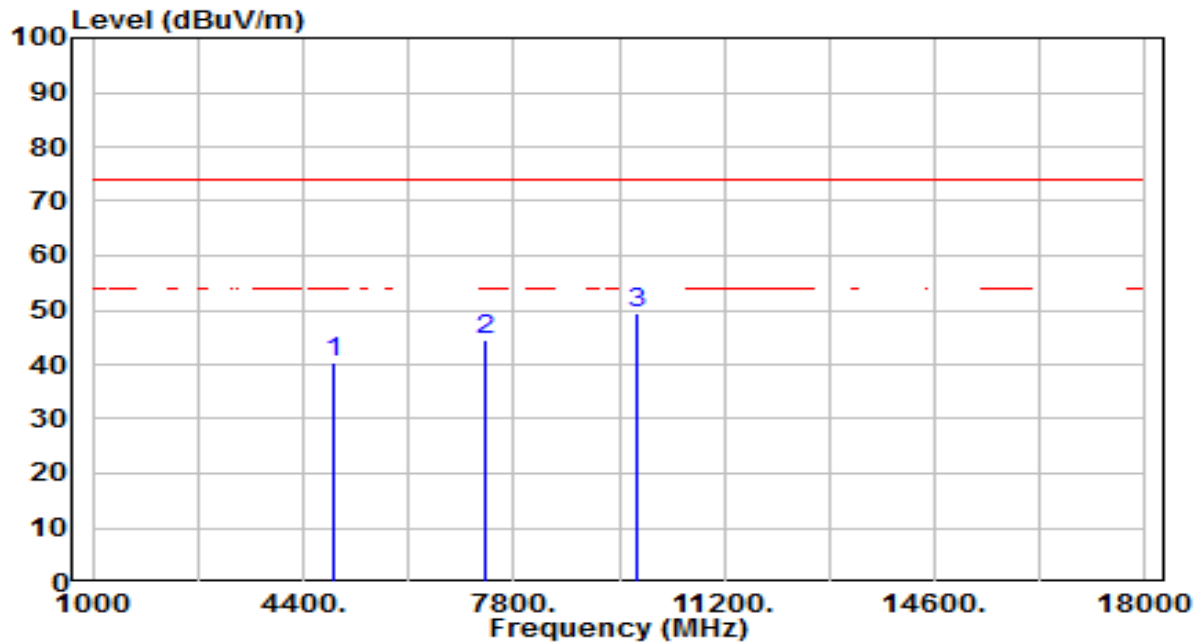


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 4904.000        | 36.58          | 3.89       | 40.47                | -33.53      | 74.00          | 200         | 332         | Peak              |
| 2  | 7356.000        | 32.41          | 12.10      | 44.51                | -29.49      | 74.00          | 200         | 178         | Peak              |
| 3  | * 9808.000      | 33.20          | 16.06      | 49.27                | -24.73      | 74.00          | 200         | 359         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 9_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

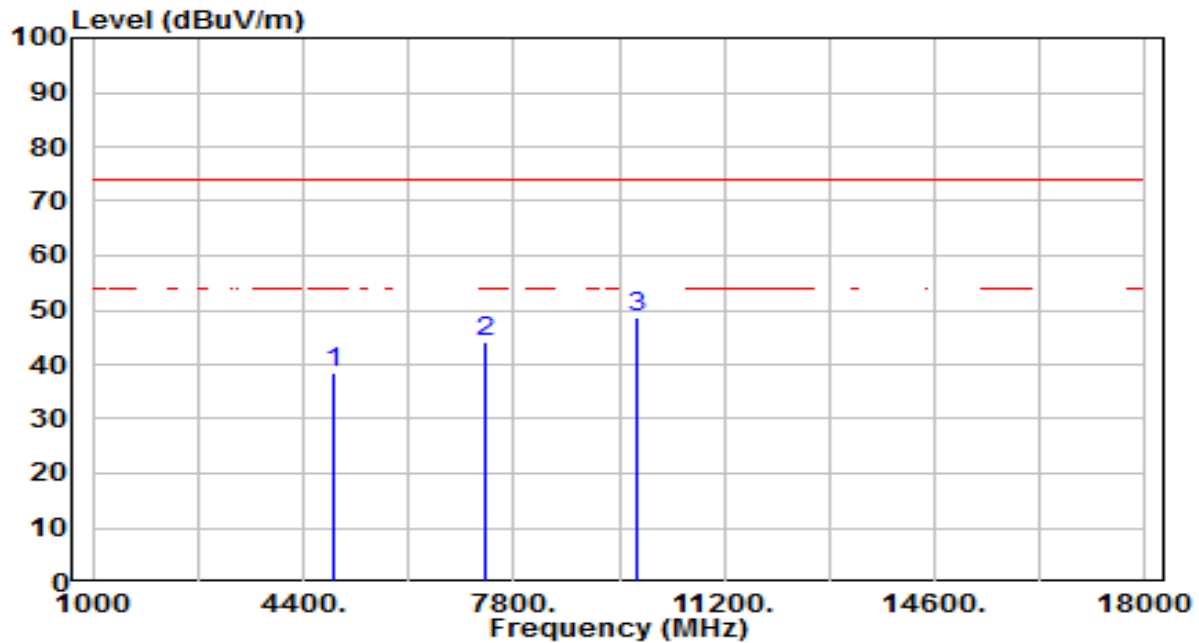


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 4904.000        | 34.63          | 3.89       | 38.52                | -35.48      | 74.00          | 200         | 131         | Peak              |
| 2  |   | 7356.000        | 32.23          | 12.10      | 44.33                | -29.67      | 74.00          | 200         | 29          | Peak              |
| 3  | * | 9808.000        | 32.55          | 16.06      | 48.61                | -25.39      | 74.00          | 200         | 235         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-13   |
| Factor    | BBHA 9170                              | Temp. / Humidity     | 21°C /45%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

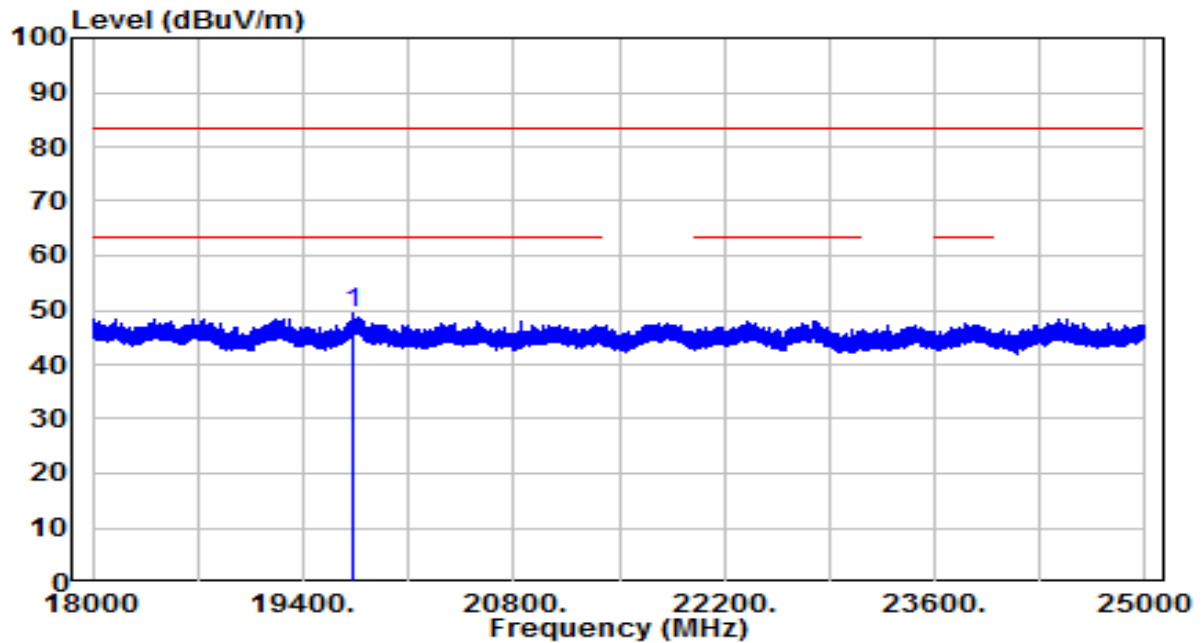


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 19724.410       | 38.46          | 10.95      | 49.41                | -34.09      | 83.50          | 150         | 215         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-13   |
| Factor    | BBHA 9170                              | Temp. / Humidity     | 21°C /45%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

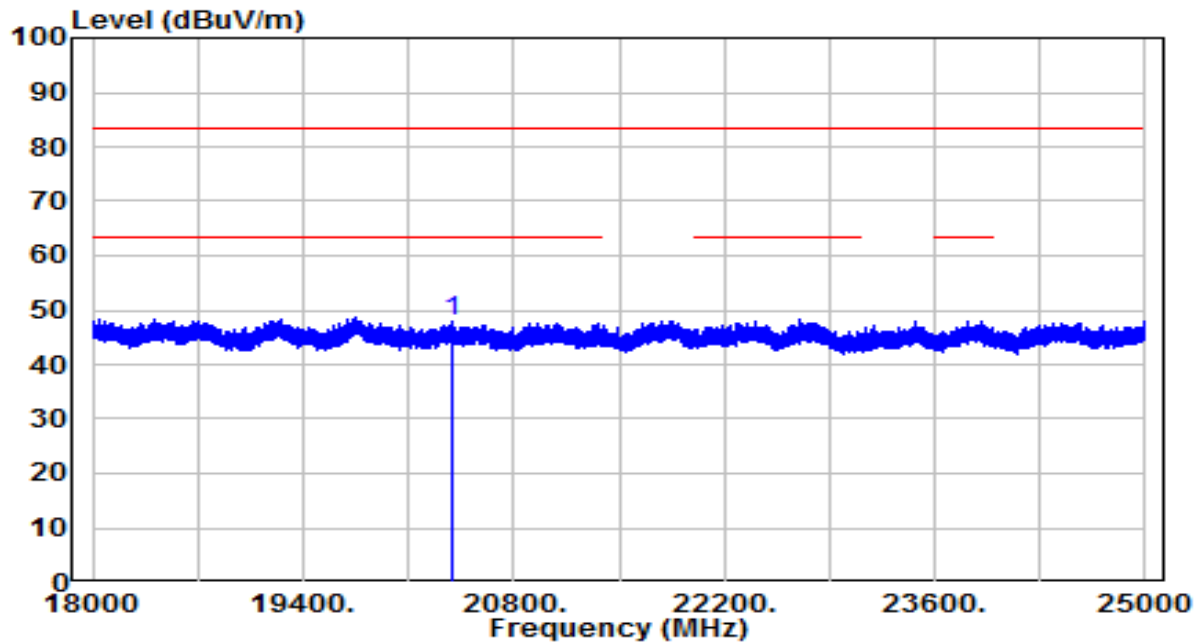

| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 20384.590       | 37.07          | 10.75      | 47.82                | -35.68      | 83.50          | 150         | 23          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)    | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                    | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 Limits |                          |                               |
|-----------------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                            | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                                 | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                                 | 24000/F (kHz)            | 30                            |
| 1.705 - 30                                    | 30                       | 30                            |
| 30 - 88                                       | 100                      | 3                             |
| 88 - 216                                      | 150                      | 3                             |
| 216 - 960                                     | 200                      | 3                             |
| Above 960                                     | 500                      | 3                             |

### 7.7.2.Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

### 7.7.3.Test Setting


#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 7.7.4.Test Setup

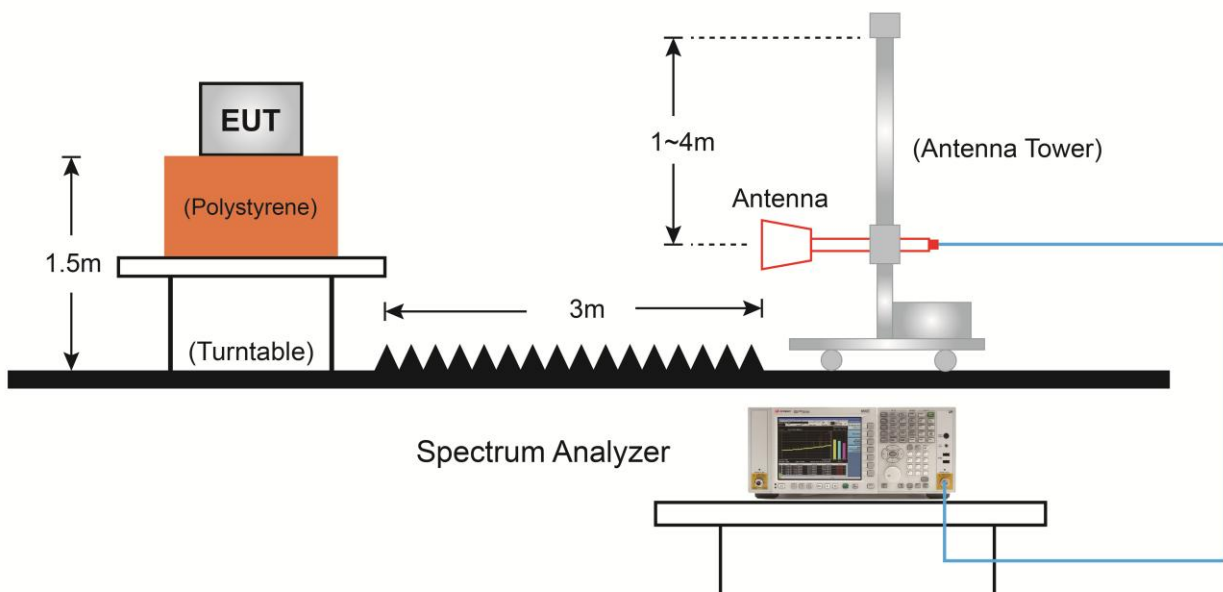

### 7.7.5. Test Result

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C / 58%   |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

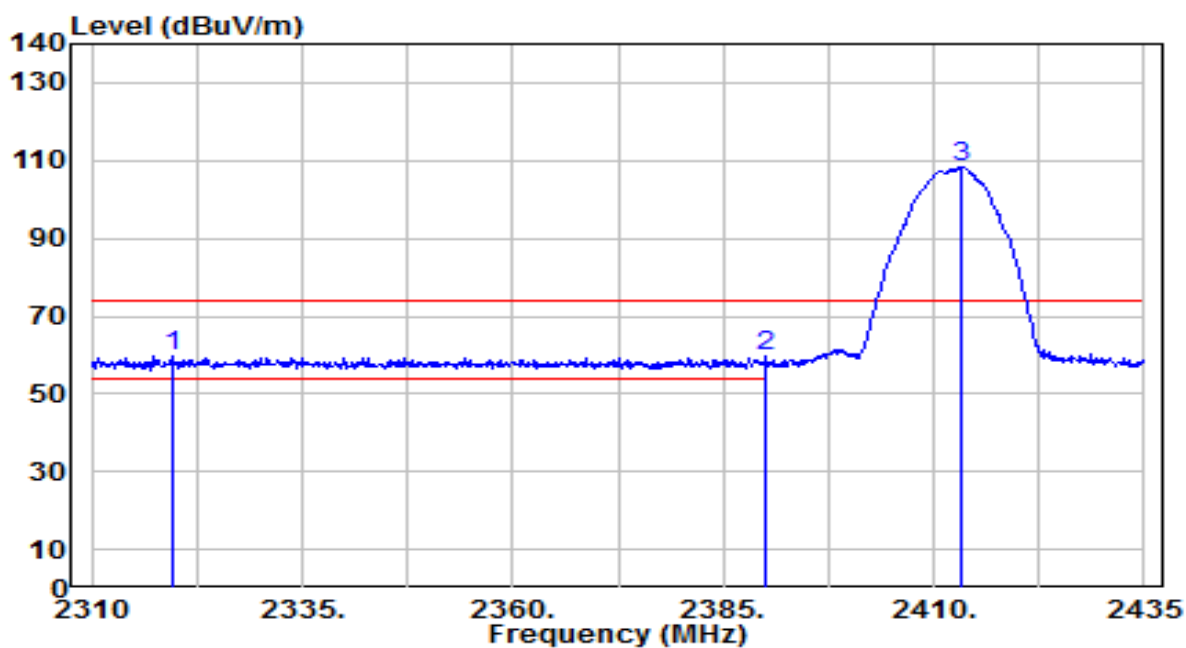


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2319.500        | 28.15          | 31.68      | 59.83                | -14.17      | 74.00          | 190         | 300         | Peak              |
| 2  |   | 2390.000        | 27.79          | 31.95      | 59.74                | -14.26      | 74.00          | 190         | 300         | Peak              |
| 3  |   | 2413.250        | 76.26          | 32.04      | 108.30               | N/A         | N/A            | 190         | 300         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

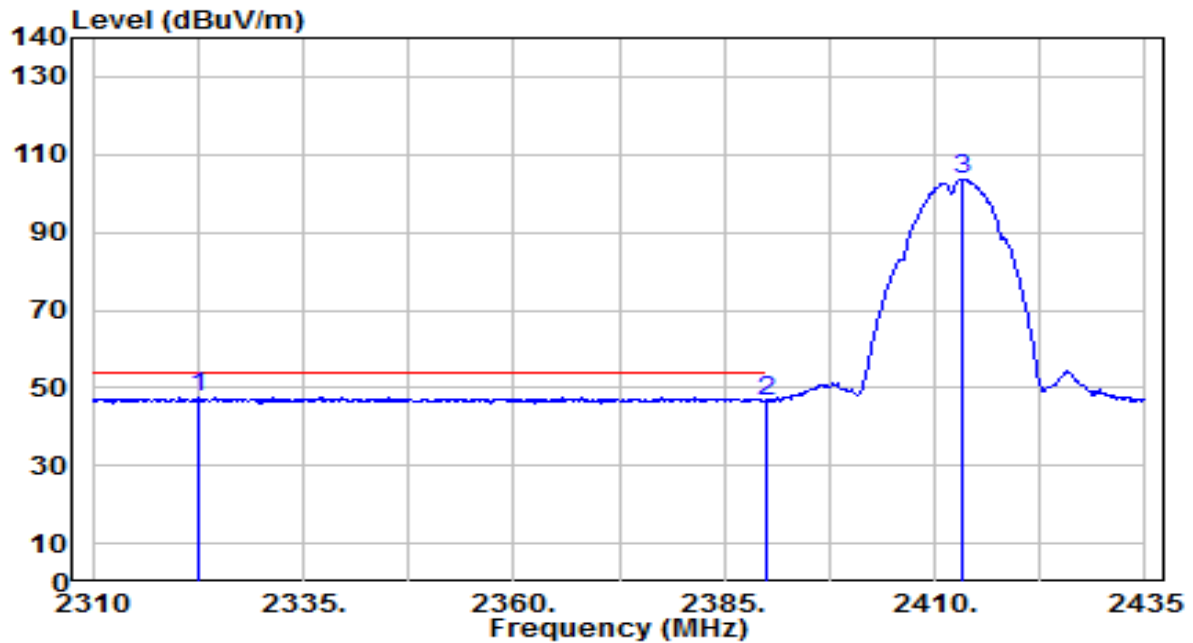


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2322.625        | 15.88          | 31.70      | 47.57                | -6.43       | 54.00          | 190         | 300         | Average           |
| 2  |   | 2390.000        | 14.75          | 31.95      | 46.69                | -7.31       | 54.00          | 190         | 300         | Average           |
| 3  |   | 2413.375        | 71.61          | 32.04      | 103.65               | N/A         | N/A            | 190         | 300         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

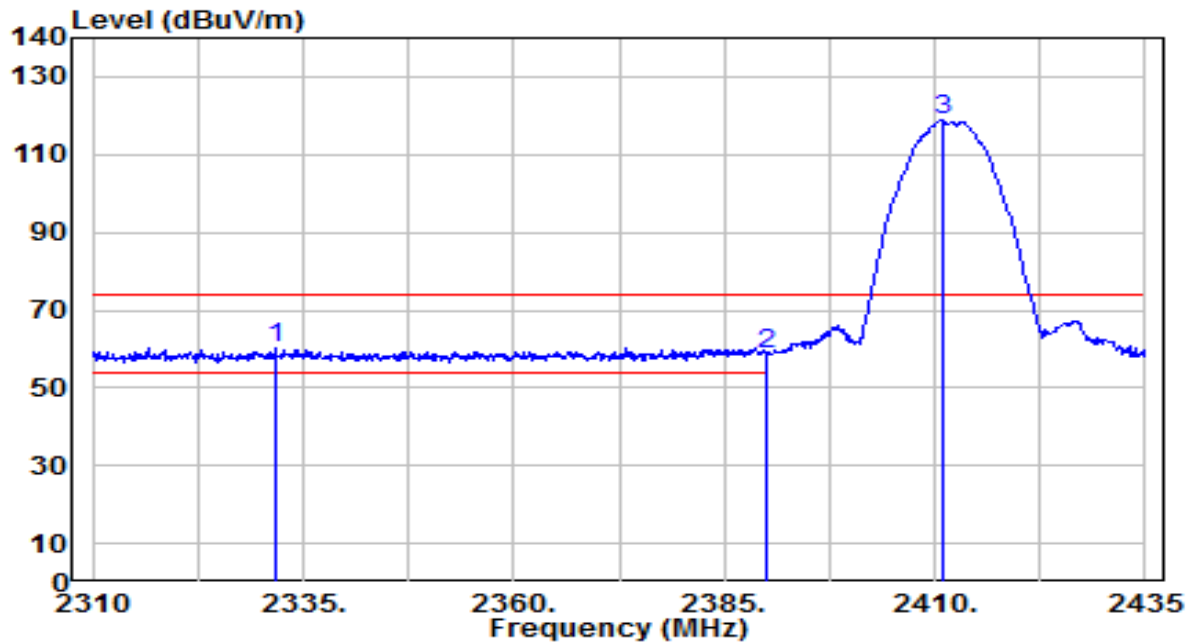


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2331.750        | 28.71          | 31.73      | 60.44                | -13.56      | 74.00          | 180         | 75          | Peak              |
| 2  |   | 2390.000        | 26.59          | 31.95      | 58.54                | -15.46      | 74.00          | 180         | 75          | Peak              |
| 3  |   | 2410.875        | 86.71          | 32.03      | 118.74               | N/A         | N/A            | 180         | 75          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 1_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

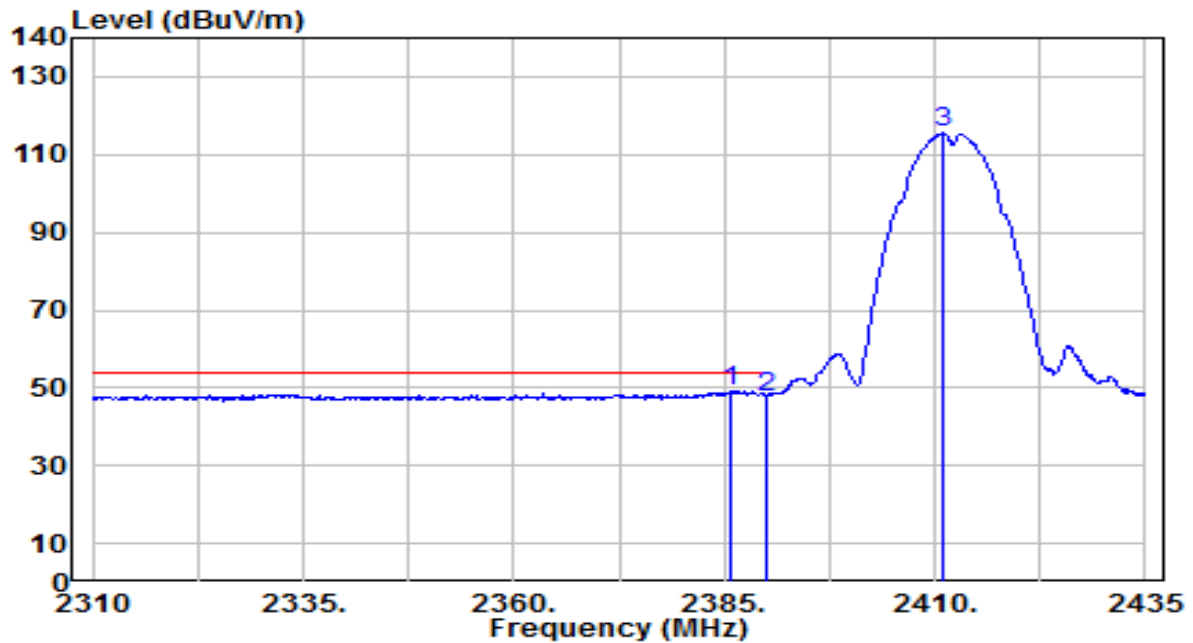


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2385.750        | 17.25          | 31.93      | 49.18                | -4.82       | 54.00          | 180         | 75          | Average           |
| 2  |   | 2390.000        | 15.77          | 31.95      | 47.72                | -6.28       | 54.00          | 180         | 75          | Average           |
| 3  |   | 2411.125        | 83.42          | 32.03      | 115.45               | N/A         | N/A            | 180         | 75          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

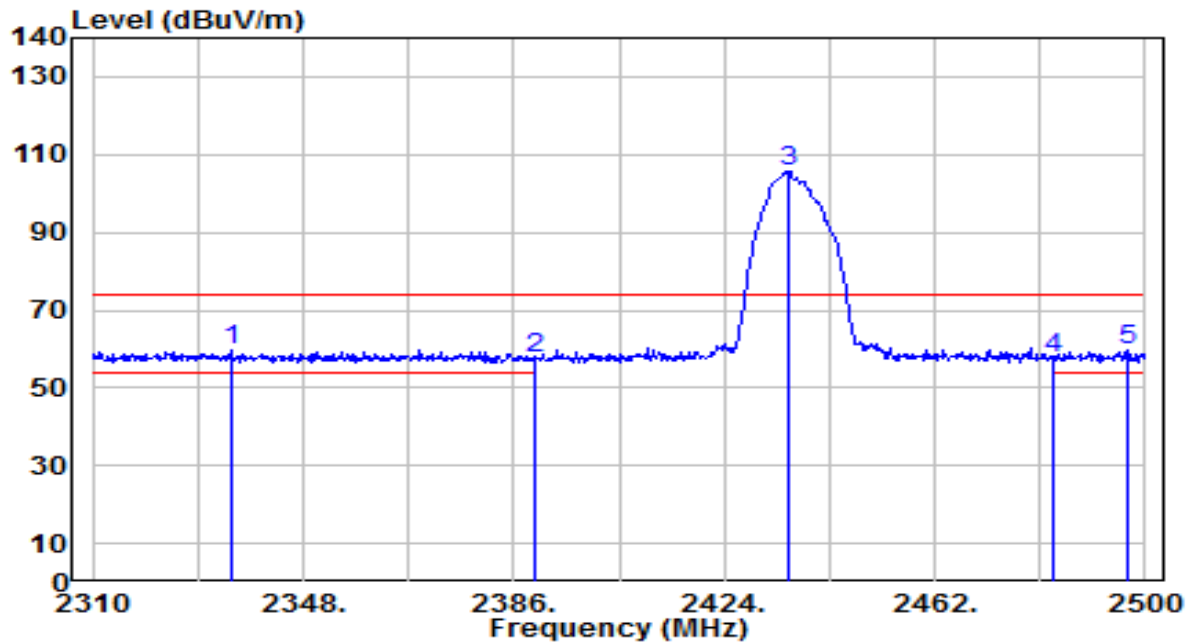


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2334.890        | 28.16          | 31.74      | 59.90                | -14.10      | 74.00          | 270         | 285         | Peak              |
| 2  |   | 2390.000        | 25.58          | 31.95      | 57.53                | -16.47      | 74.00          | 270         | 285         | Peak              |
| 3  |   | 2435.590        | 73.49          | 32.12      | 105.61               | N/A         | N/A            | 270         | 285         | Peak              |
| 4  |   | 2483.500        | 25.20          | 32.30      | 57.50                | -16.50      | 74.00          | 270         | 285         | Peak              |
| 5  |   | 2496.960        | 27.34          | 32.35      | 59.69                | -14.31      | 74.00          | 270         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

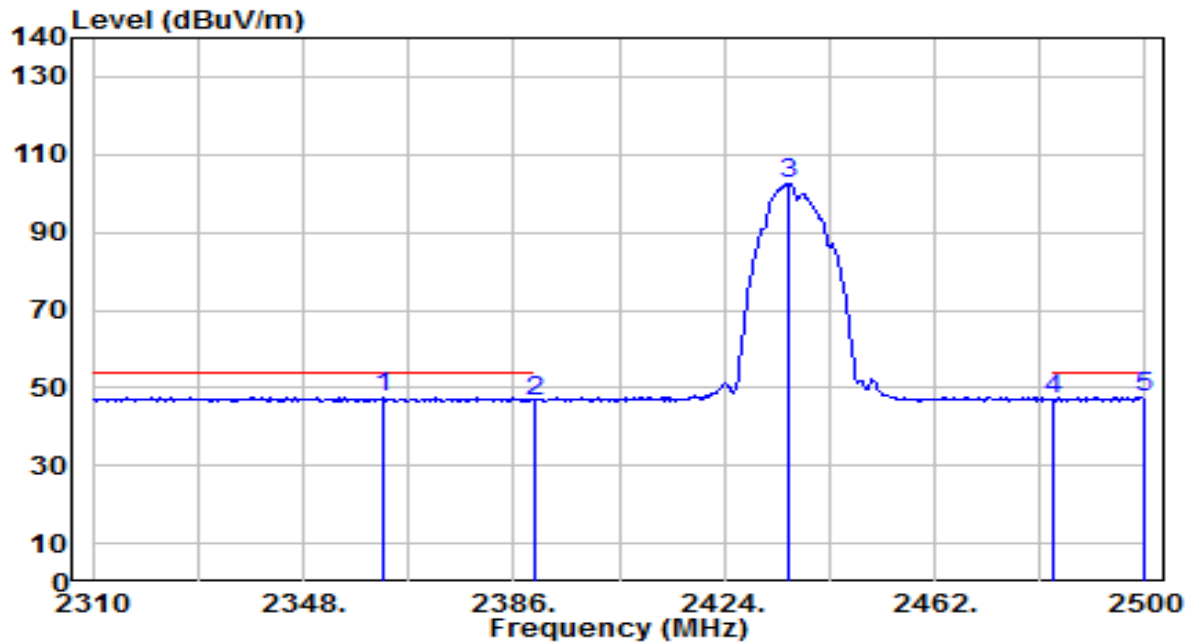


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2362.630        | 15.62          | 31.85      | 47.47                | -6.53       | 54.00          | 270         | 285         | Average           |
| 2  |   | 2390.000        | 14.67          | 31.95      | 46.61                | -7.39       | 54.00          | 270         | 285         | Average           |
| 3  |   | 2435.590        | 70.29          | 32.12      | 102.40               | N/A         | N/A            | 270         | 285         | Average           |
| 4  |   | 2483.500        | 14.60          | 32.30      | 46.90                | -7.10       | 54.00          | 270         | 285         | Average           |
| 5  | * | 2500.000        | 15.14          | 32.36      | 47.50                | -6.50       | 54.00          | 270         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

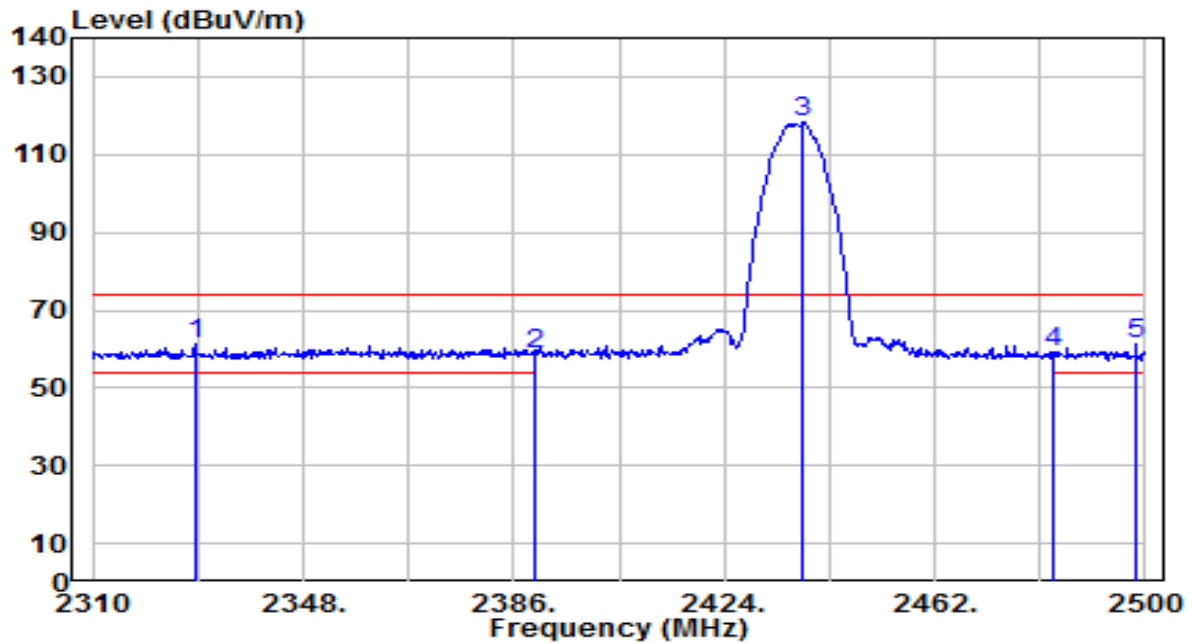


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2328.430        | 29.38          | 31.72      | 61.10                | -12.90      | 74.00          | 180         | 315         | Peak              |
| 2  |   | 2390.000        | 26.77          | 31.95      | 58.72                | -15.28      | 74.00          | 180         | 315         | Peak              |
| 3  |   | 2438.250        | 86.05          | 32.13      | 118.18               | N/A         | N/A            | 180         | 315         | Peak              |
| 4  |   | 2483.500        | 27.07          | 32.30      | 59.37                | -14.63      | 74.00          | 180         | 315         | Peak              |
| 5  |   | 2498.290        | 28.68          | 32.35      | 61.04                | -12.96      | 74.00          | 180         | 315         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 6_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

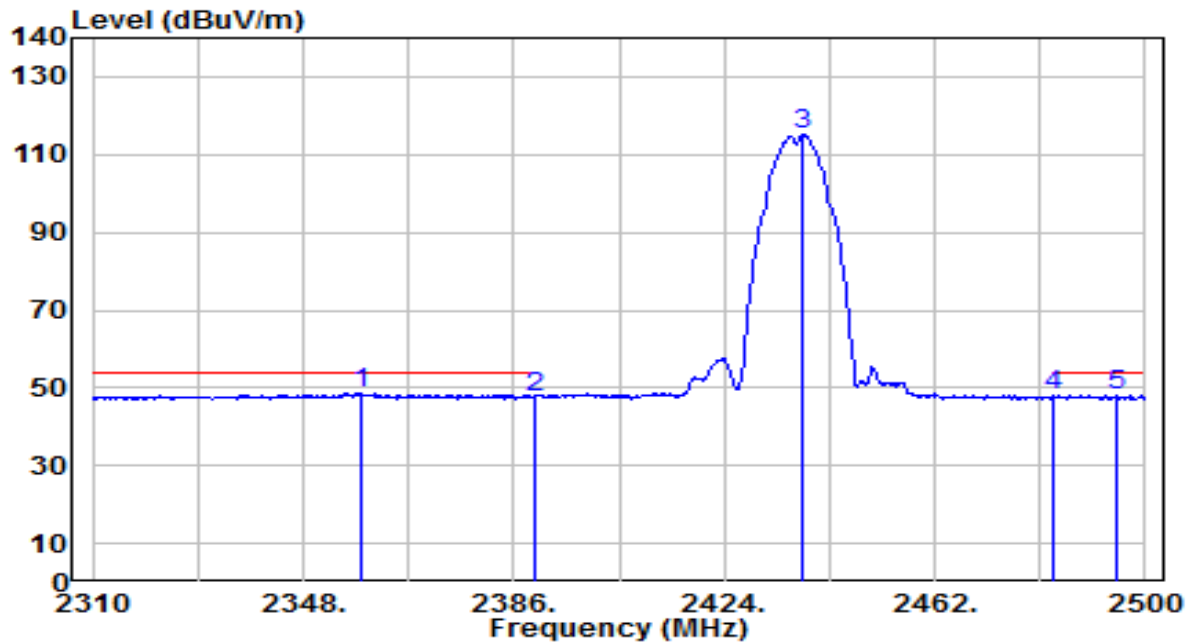


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2358.260        | 16.78          | 31.83      | 48.61                | -5.39       | 54.00          | 180         | 315         | Average           |
| 2  |   | 2390.000        | 15.85          | 31.95      | 47.80                | -6.20       | 54.00          | 180         | 315         | Average           |
| 3  |   | 2438.250        | 83.02          | 32.13      | 115.15               | N/A         | N/A            | 180         | 315         | Average           |
| 4  |   | 2483.500        | 15.55          | 32.30      | 47.85                | -6.15       | 54.00          | 180         | 315         | Average           |
| 5  |   | 2494.870        | 15.65          | 32.34      | 47.99                | -6.01       | 54.00          | 180         | 315         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1               | Test Voltage         | AC 120V/60Hz |

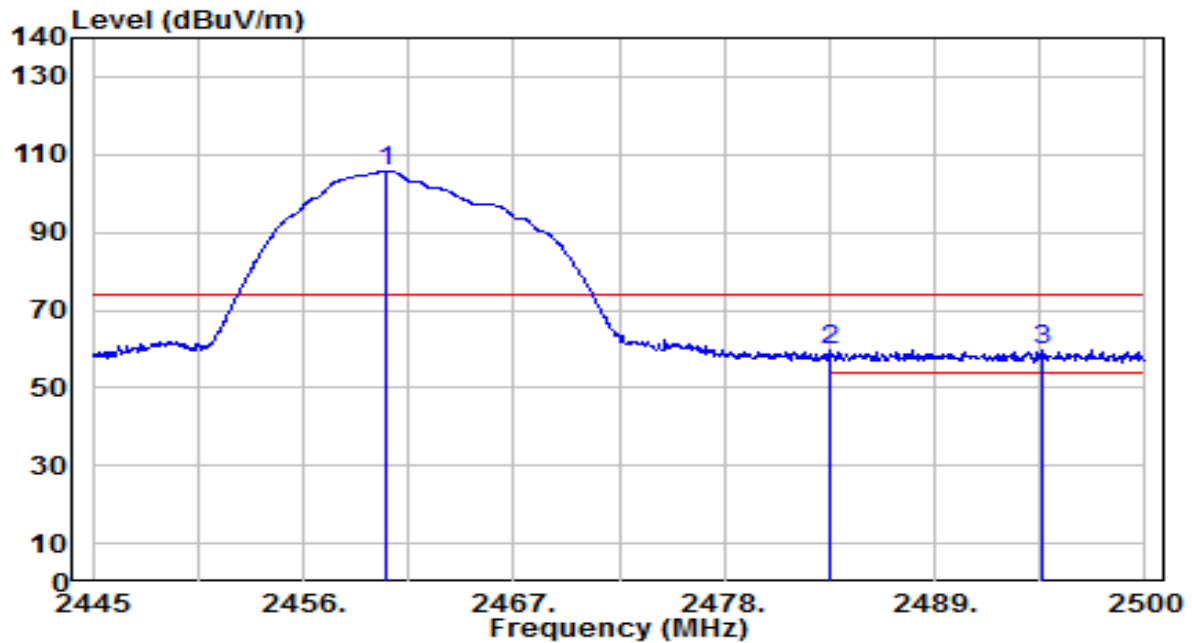


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2460.345        | 73.50          | 32.21      | 105.71               | N/A         | N/A            | 295         | 285         | Peak              |
| 2  | * | 2483.500        | 27.64          | 32.30      | 59.94                | -14.06      | 74.00          | 295         | 285         | Peak              |
| 3  |   | 2494.610        | 27.37          | 32.34      | 59.71                | -14.29      | 74.00          | 295         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1               | Test Voltage         | AC 120V/60Hz |

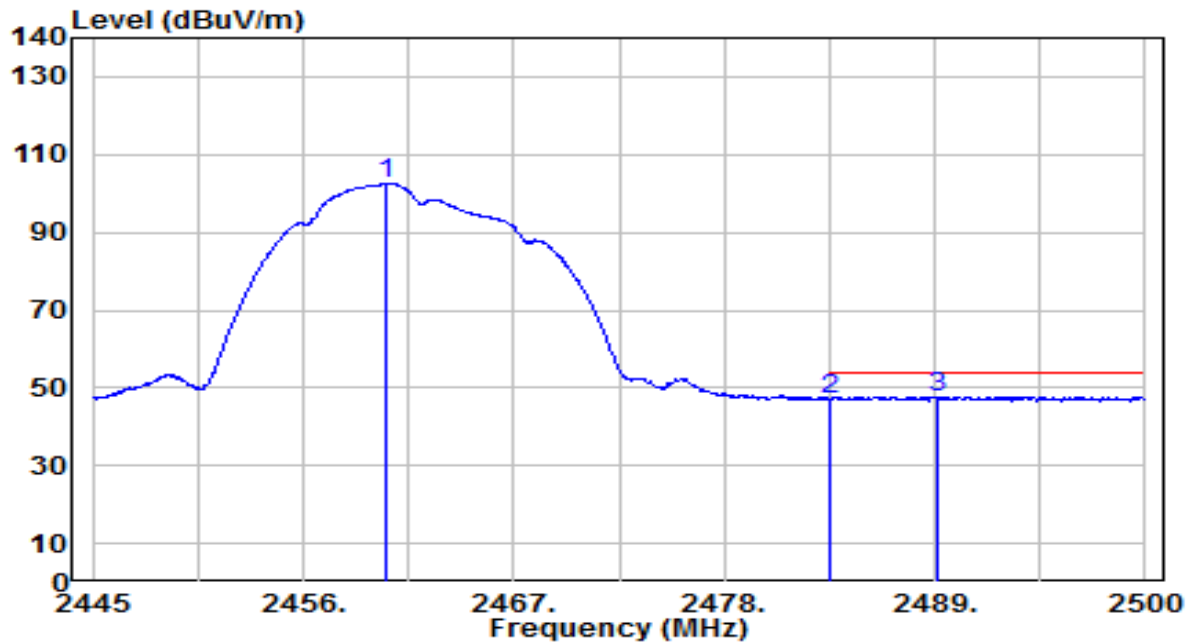


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2460.345        | 70.38          | 32.21      | 102.59               | N/A         | N/A            | 295         | 285         | Average           |
| 2  |   | 2483.500        | 14.80          | 32.30      | 47.10                | -6.90       | 54.00          | 295         | 285         | Average           |
| 3  | * | 2489.165        | 15.36          | 32.32      | 47.68                | -6.32       | 54.00          | 295         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1               | Test Voltage         | AC 120V/60Hz |

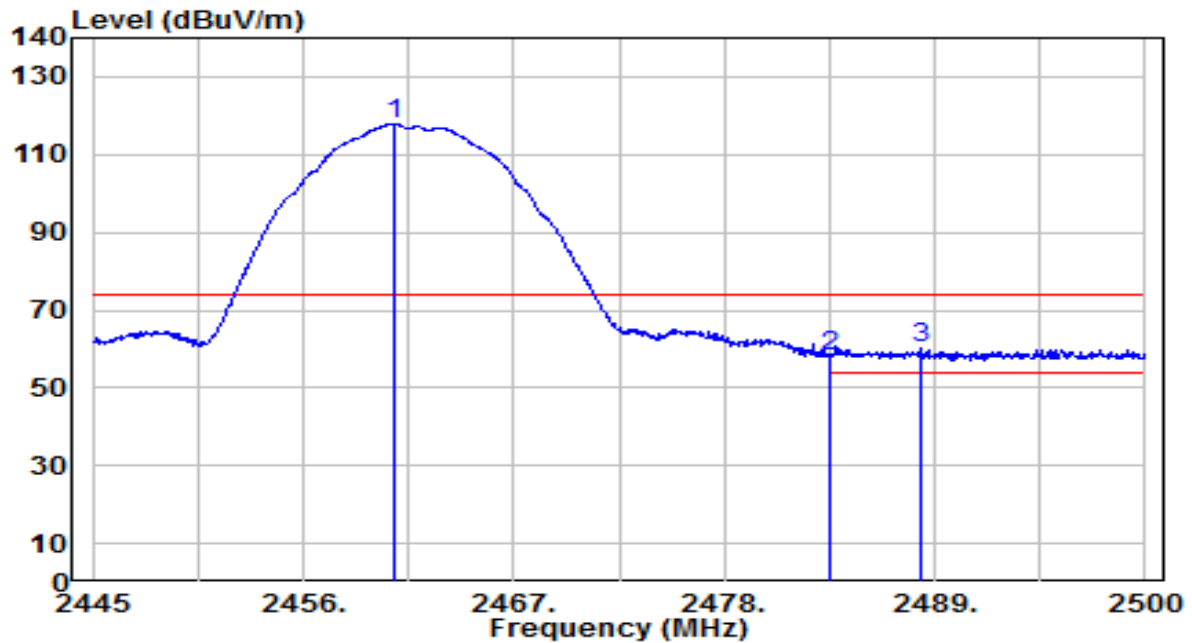


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.730        | 85.61          | 32.21      | 117.82               | N/A         | N/A            | 130         | 315         | Peak              |
| 2  | 2483.500        | 25.77          | 32.30      | 58.07                | -15.93      | 74.00          | 130         | 315         | Peak              |
| 3  | * 2488.340      | 27.65          | 32.32      | 59.97                | -14.03      | 74.00          | 130         | 315         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11b_TX_CH 11_ANT 0+1               | Test Voltage         | AC 120V/60Hz |

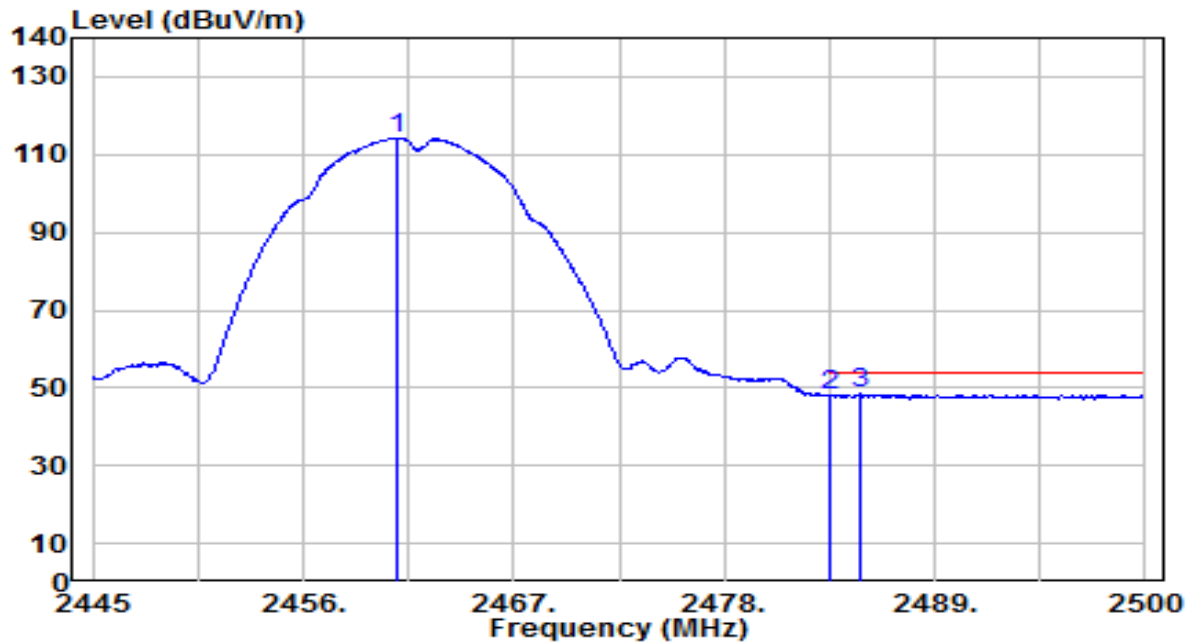


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2460.895        | 82.01          | 32.21      | 114.22               | N/A         | N/A            | 130         | 315         | Average           |
| 2  |   | 2483.500        | 15.59          | 32.30      | 47.89                | -6.11       | 54.00          | 130         | 315         | Average           |
| 3  | * | 2485.150        | 16.07          | 32.30      | 48.38                | -5.62       | 54.00          | 130         | 315         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

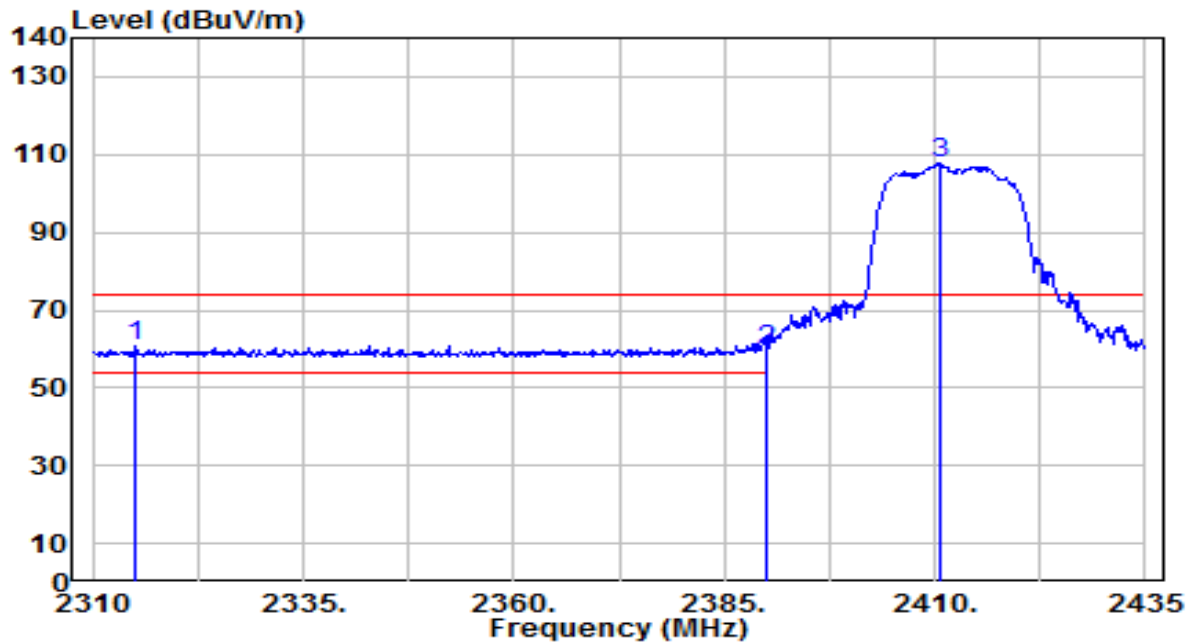


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2315.125        | 29.26          | 31.67      | 60.93                | -13.07      | 74.00          | 130         | 285         | Peak              |
| 2  |   | 2390.000        | 27.93          | 31.95      | 59.88                | -14.12      | 74.00          | 130         | 285         | Peak              |
| 3  |   | 2410.750        | 75.69          | 32.03      | 107.71               | N/A         | N/A            | 130         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

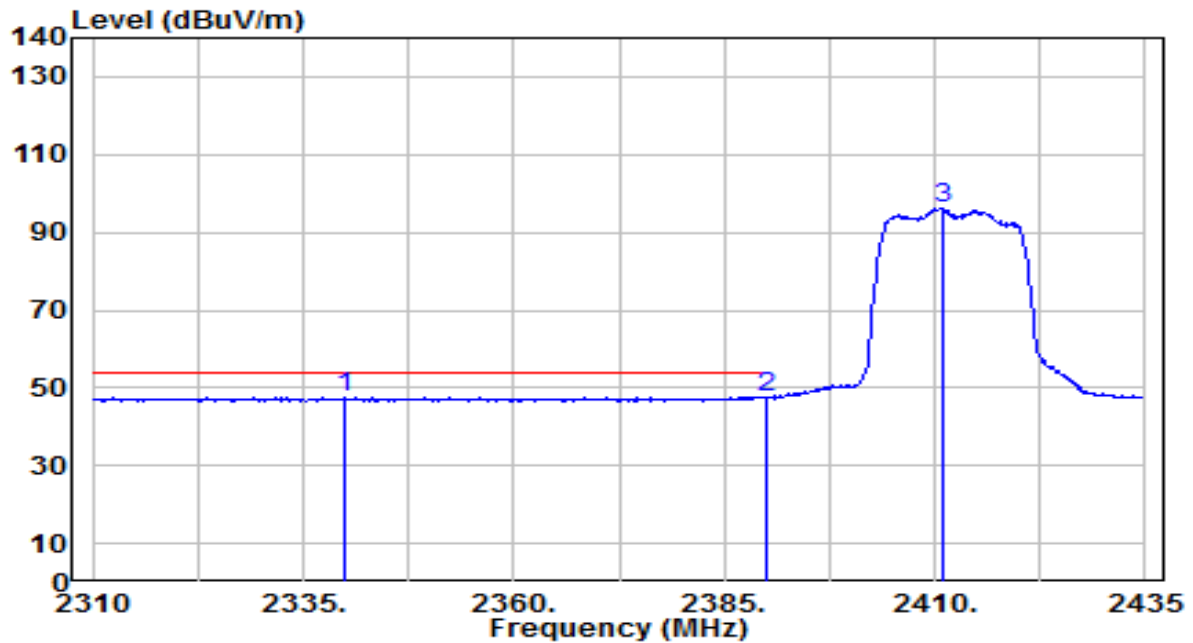


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2339.875        | 15.75          | 31.76      | 47.51                | -6.49       | 54.00          | 130         | 285         | Average           |
| 2  |   | 2390.000        | 15.49          | 31.95      | 47.44                | -6.56       | 54.00          | 130         | 285         | Average           |
| 3  |   | 2410.875        | 64.26          | 32.03      | 96.28                | N/A         | N/A            | 130         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

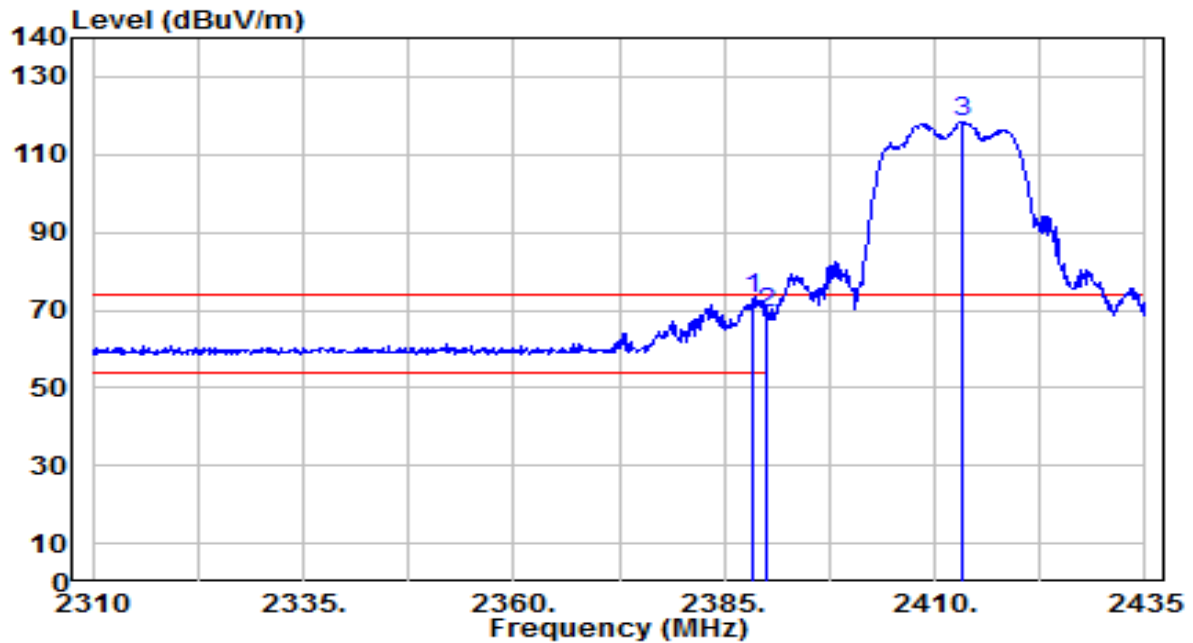


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.375        | 40.94          | 31.94      | 72.88                | -1.12       | 74.00          | 140         | 45          | Peak              |
| 2  |   | 2390.000        | 37.12          | 31.95      | 69.07                | -4.93       | 74.00          | 140         | 45          | Peak              |
| 3  |   | 2413.375        | 86.52          | 32.04      | 118.56               | N/A         | N/A            | 140         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 1_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

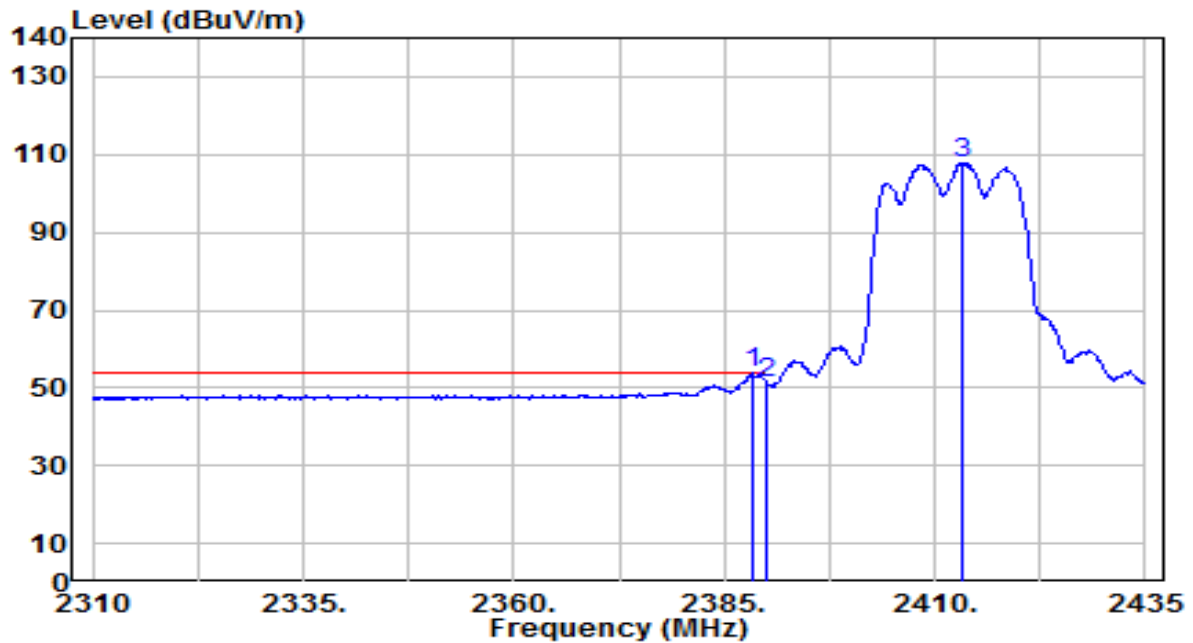


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.375        | 21.77          | 31.94      | 53.71                | -0.29       | 54.00          | 140         | 45          | Average           |
| 2  |   | 2390.000        | 19.29          | 31.95      | 51.24                | -2.76       | 54.00          | 140         | 45          | Average           |
| 3  |   | 2413.375        | 75.91          | 32.04      | 107.94               | N/A         | N/A            | 140         | 45          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

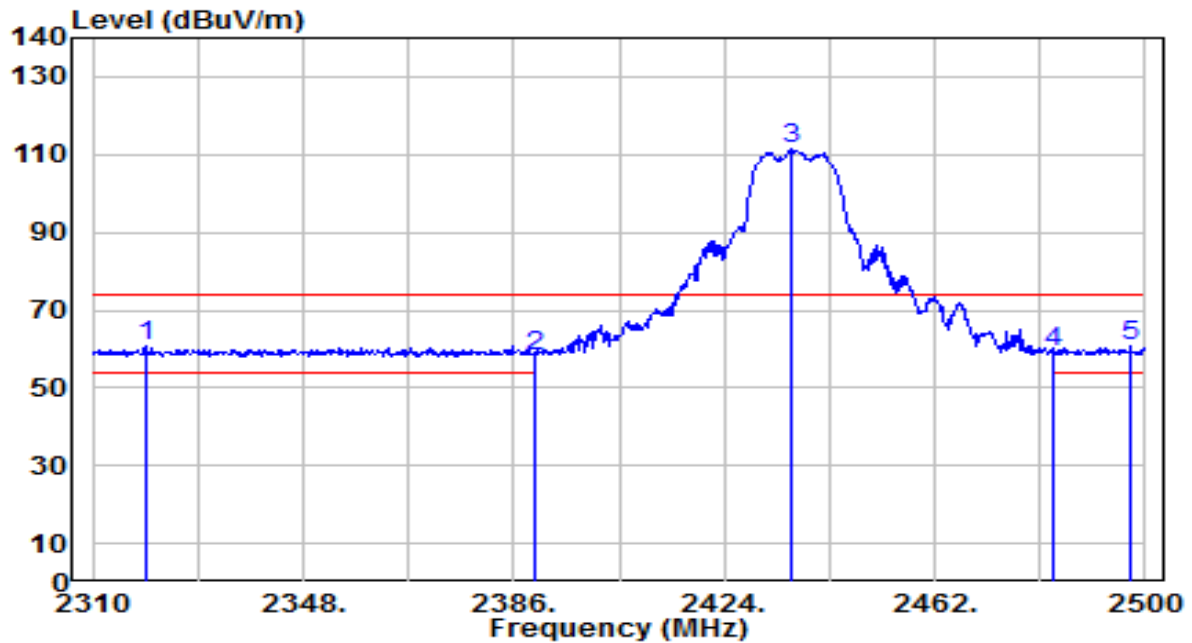


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2319.500        | 29.16          | 31.68      | 60.84                | -13.16      | 74.00          | 195         | 305         | Peak              |
| 2  |   | 2390.000        | 26.42          | 31.95      | 58.37                | -15.63      | 74.00          | 195         | 305         | Peak              |
| 3  |   | 2436.160        | 79.09          | 32.12      | 111.21               | N/A         | N/A            | 195         | 305         | Peak              |
| 4  |   | 2483.500        | 26.79          | 32.30      | 59.09                | -14.91      | 74.00          | 195         | 305         | Peak              |
| 5  |   | 2497.340        | 28.20          | 32.35      | 60.55                | -13.45      | 74.00          | 195         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

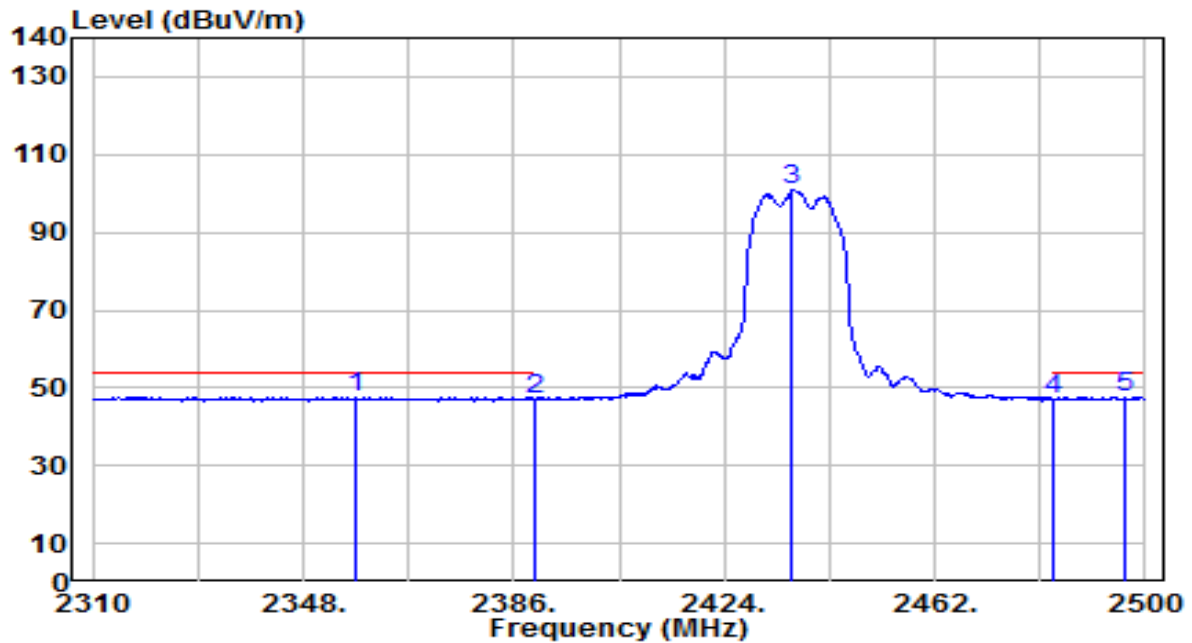


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2357.500        | 15.89          | 31.83      | 47.72                | -6.28       | 54.00          | 195         | 305         | Average           |
| 2  |   | 2390.000        | 15.15          | 31.95      | 47.10                | -6.90       | 54.00          | 195         | 305         | Average           |
| 3  |   | 2436.350        | 68.97          | 32.12      | 101.09               | N/A         | N/A            | 195         | 305         | Average           |
| 4  |   | 2483.500        | 14.81          | 32.30      | 47.11                | -6.89       | 54.00          | 195         | 305         | Average           |
| 5  |   | 2496.390        | 15.28          | 32.35      | 47.62                | -6.38       | 54.00          | 195         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

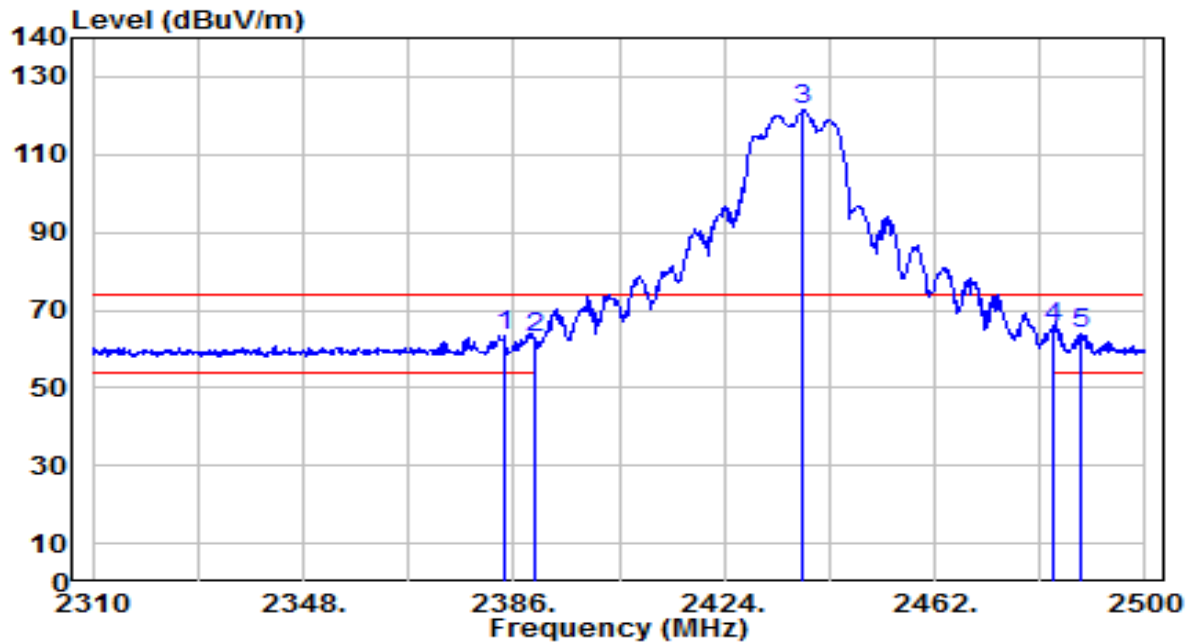


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2384.290        | 31.73          | 31.93      | 63.65                | -10.35      | 74.00          | 110         | 45          | Peak              |
| 2  |   | 2390.000        | 30.68          | 31.95      | 62.63                | -11.37      | 74.00          | 110         | 45          | Peak              |
| 3  |   | 2438.250        | 89.55          | 32.13      | 121.68               | N/A         | N/A            | 110         | 45          | Peak              |
| 4  | * | 2483.500        | 33.25          | 32.30      | 65.55                | -8.45       | 74.00          | 110         | 45          | Peak              |
| 5  |   | 2488.410        | 31.65          | 32.32      | 63.97                | -10.03      | 74.00          | 110         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 6_ANT 0+1                | Test Voltage         | AC 120V/60Hz |

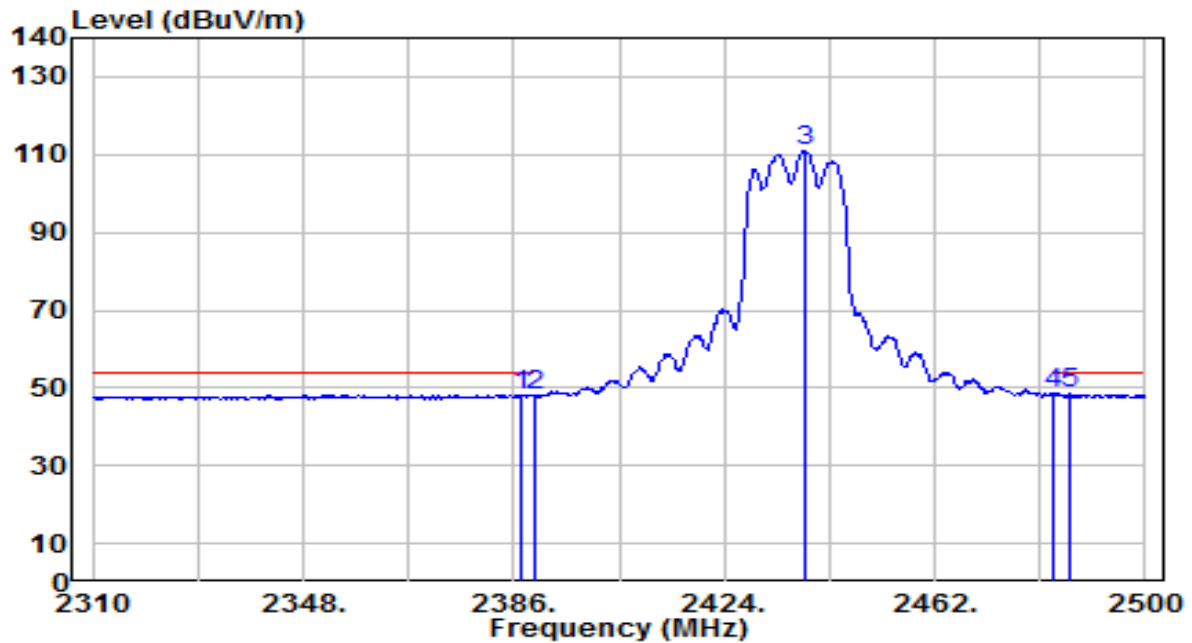


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.140        | 16.34          | 31.94      | 48.27                | -5.73       | 54.00          | 110         | 45          | Average           |
| 2  |   | 2390.000        | 16.27          | 31.95      | 48.21                | -5.79       | 54.00          | 110         | 45          | Average           |
| 3  |   | 2438.440        | 79.03          | 32.13      | 111.16               | N/A         | N/A            | 110         | 45          | Average           |
| 4  | * | 2483.500        | 16.10          | 32.30      | 48.40                | -5.60       | 54.00          | 110         | 45          | Average           |
| 5  |   | 2486.510        | 16.05          | 32.31      | 48.36                | -5.64       | 54.00          | 110         | 45          | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1               | Test Voltage         | AC 120V/60Hz |

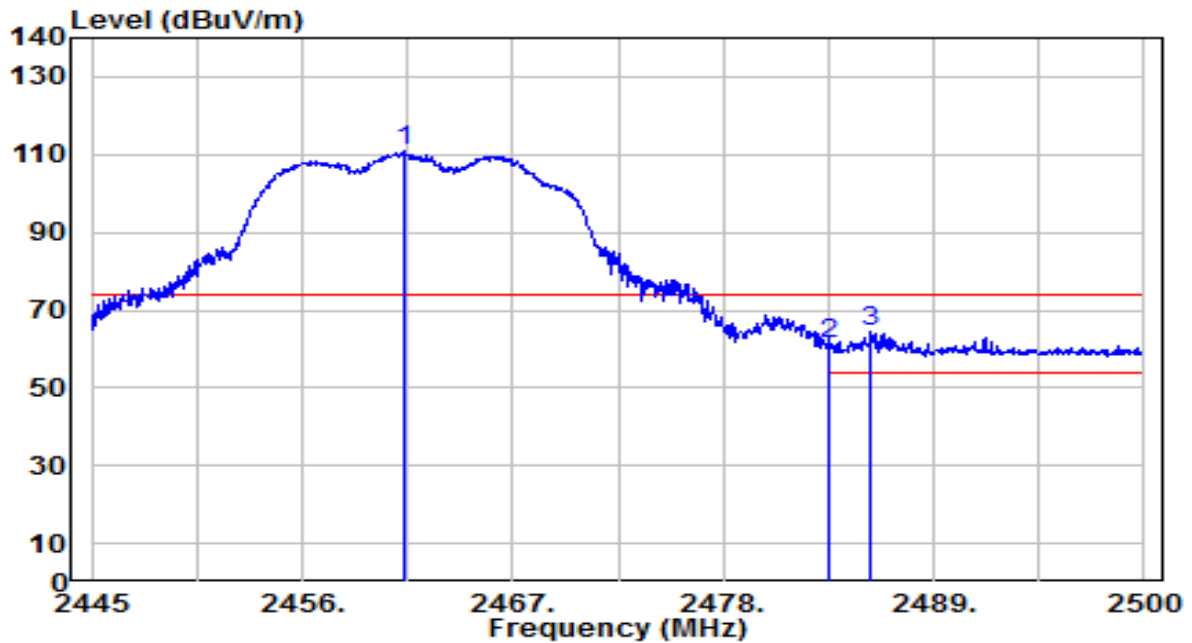


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2461.280        | 78.58          | 32.22      | 110.79               | N/A         | N/A            | 265         | 305         | Peak              |
| 2  | * | 2483.500        | 28.77          | 32.30      | 61.07                | -12.93      | 74.00          | 265         | 305         | Peak              |
| 3  |   | 2485.755        | 31.91          | 32.31      | 64.21                | -9.79       | 74.00          | 265         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1               | Test Voltage         | AC 120V/60Hz |

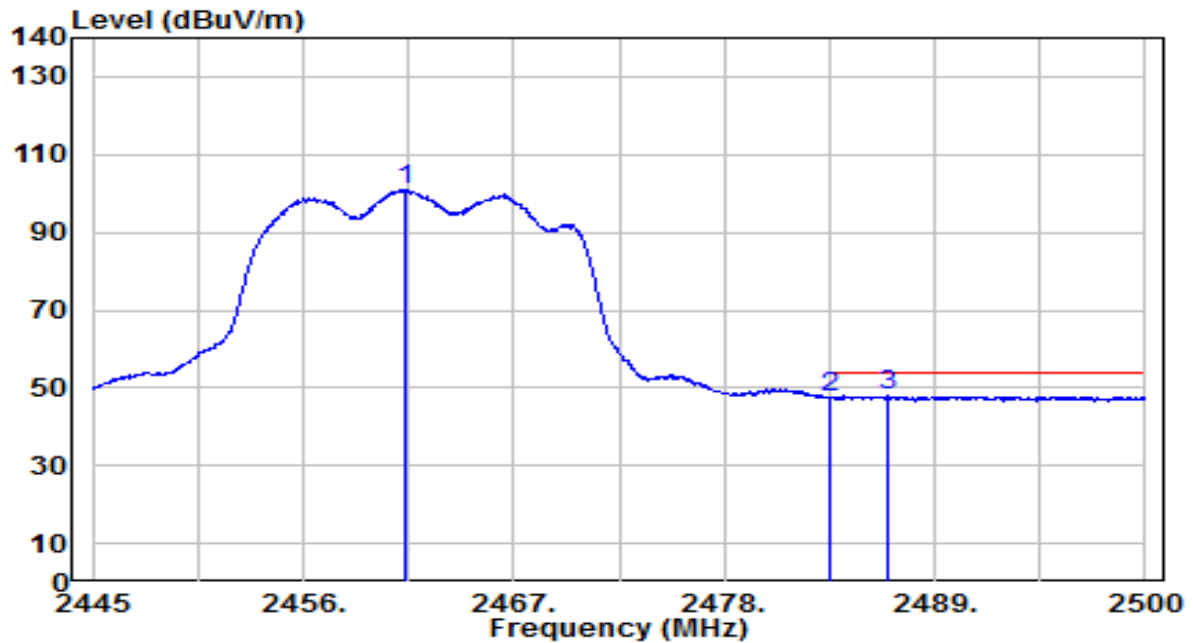


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2461.335        | 68.92          | 32.22      | 101.13               | N/A         | N/A            | 265         | 305         | Average           |
| 2  |   | 2483.500        | 15.26          | 32.30      | 47.56                | -6.44       | 54.00          | 265         | 305         | Average           |
| 3  | * | 2486.525        | 15.53          | 32.31      | 47.84                | -6.16       | 54.00          | 265         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1               | Test Voltage         | AC 120V/60Hz |

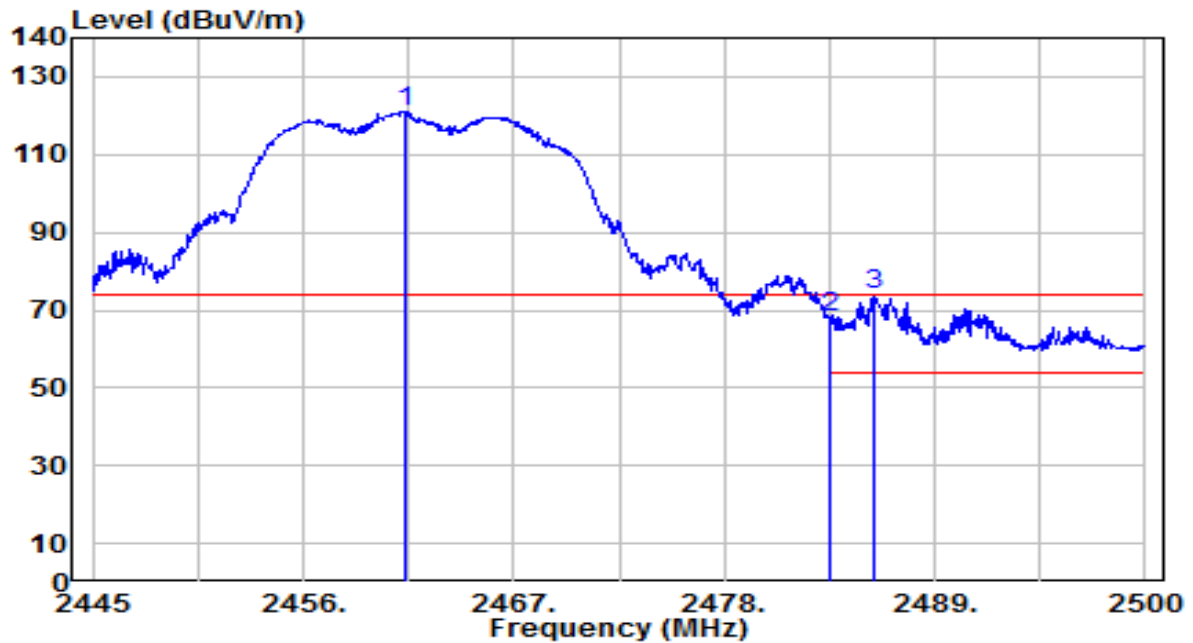


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2461.335        | 88.90          | 32.22      | 121.11               | N/A         | N/A            | 195         | 100         | Peak              |
| 2  | 2483.500        | 35.86          | 32.30      | 68.15                | -5.85       | 74.00          | 195         | 100         | Peak              |
| 3  | * 2485.865      | 41.41          | 32.31      | 73.71                | -0.29       | 74.00          | 195         | 100         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1               | Test Voltage         | AC 120V/60Hz |

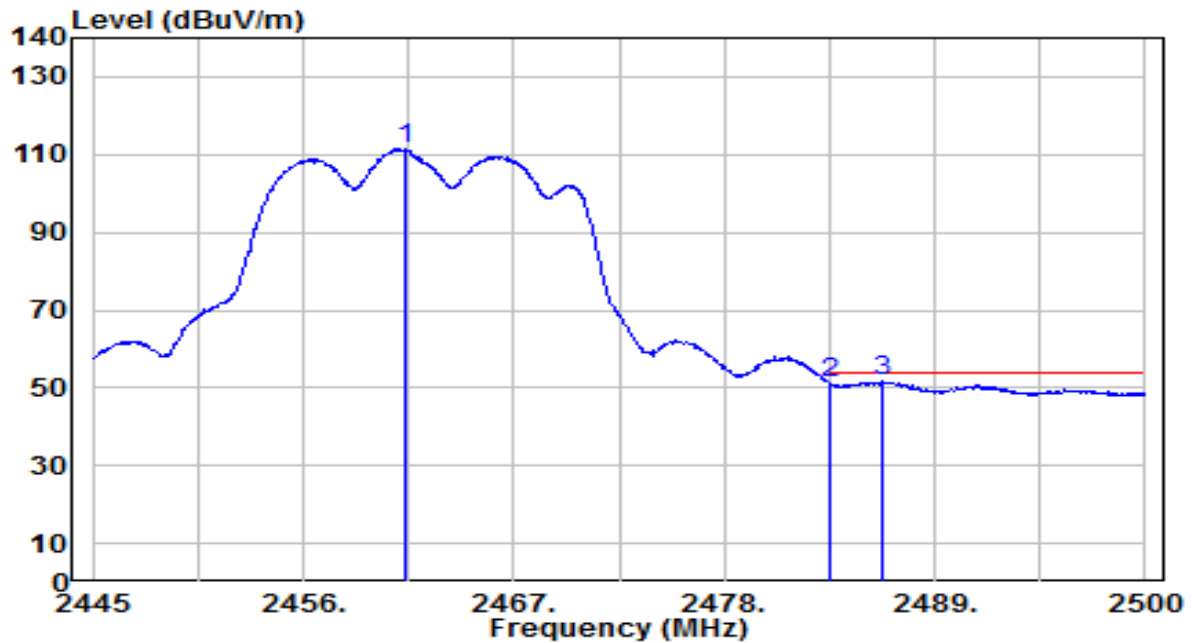


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2461.335        | 79.32          | 32.22      | 111.53               | N/A         | N/A            | 195         | 100         | Average           |
| 2  | 2483.500        | 18.91          | 32.30      | 51.21                | -2.79       | 54.00          | 195         | 100         | Average           |
| 3  | * 2486.305      | 19.31          | 32.31      | 51.62                | -2.38       | 54.00          | 195         | 100         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

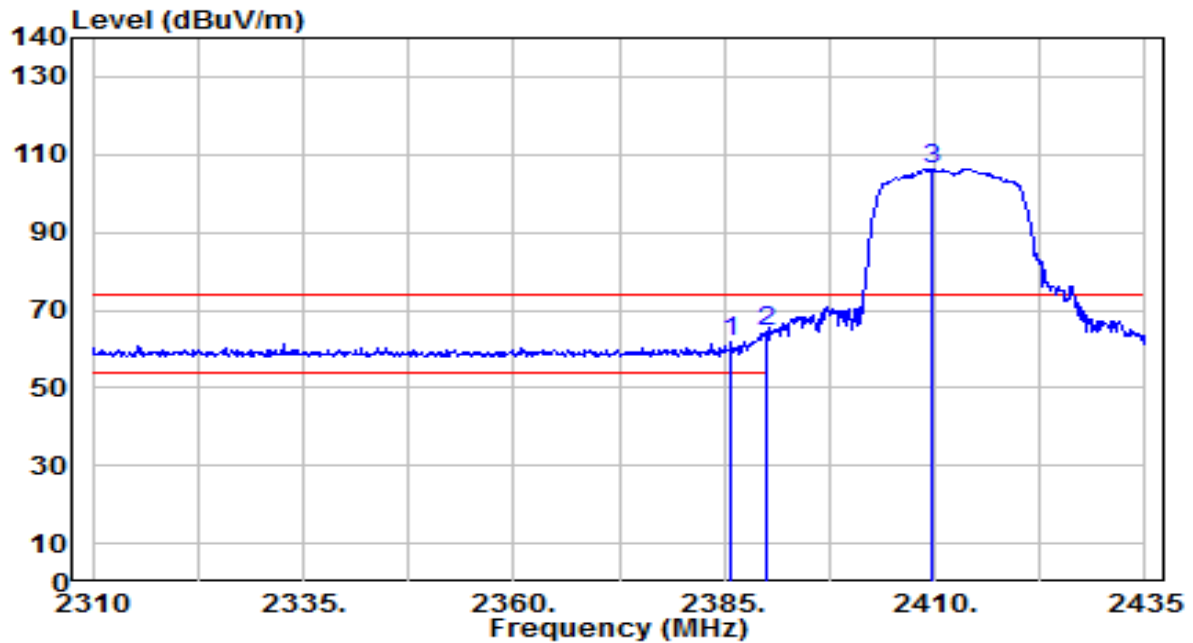


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2385.750        | 30.02          | 31.93      | 61.95                | -12.05      | 74.00          | 130         | 285         | Peak              |
| 2  | * | 2390.000        | 32.46          | 31.95      | 64.41                | -9.59       | 74.00          | 130         | 285         | Peak              |
| 3  |   | 2409.625        | 74.43          | 32.02      | 106.45               | N/A         | N/A            | 130         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

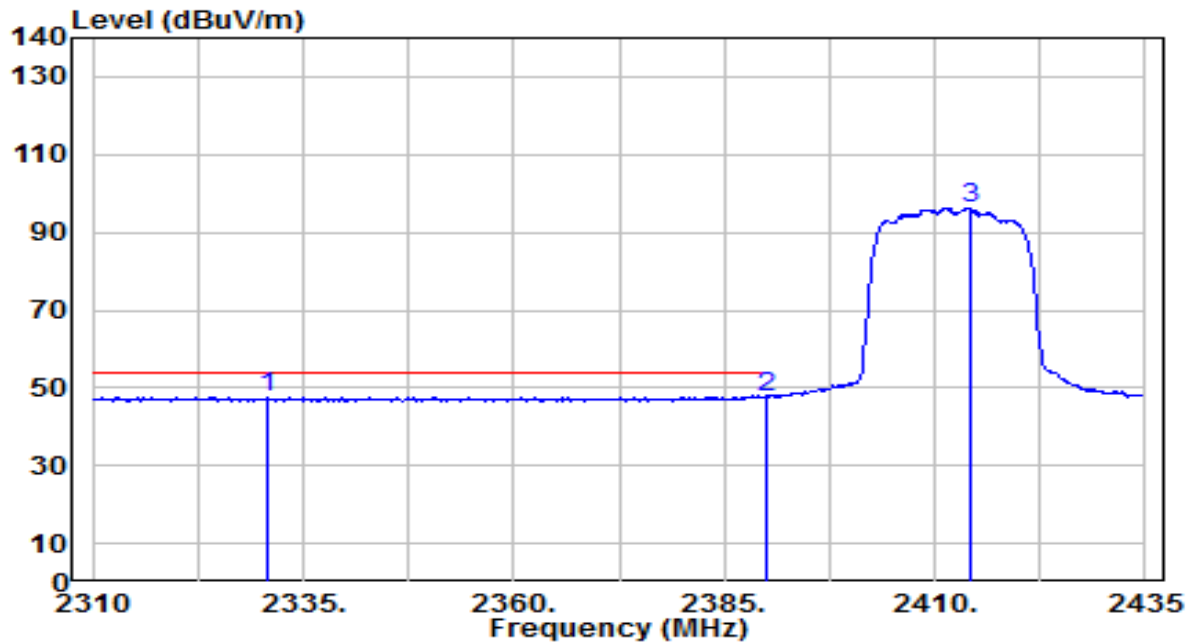


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2330.750        | 15.84          | 31.73      | 47.56                | -6.44       | 54.00          | 130         | 285         | Average           |
| 2  |   | 2390.000        | 15.44          | 31.95      | 47.38                | -6.62       | 54.00          | 130         | 285         | Average           |
| 3  |   | 2414.125        | 64.36          | 32.04      | 96.40                | N/A         | N/A            | 130         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

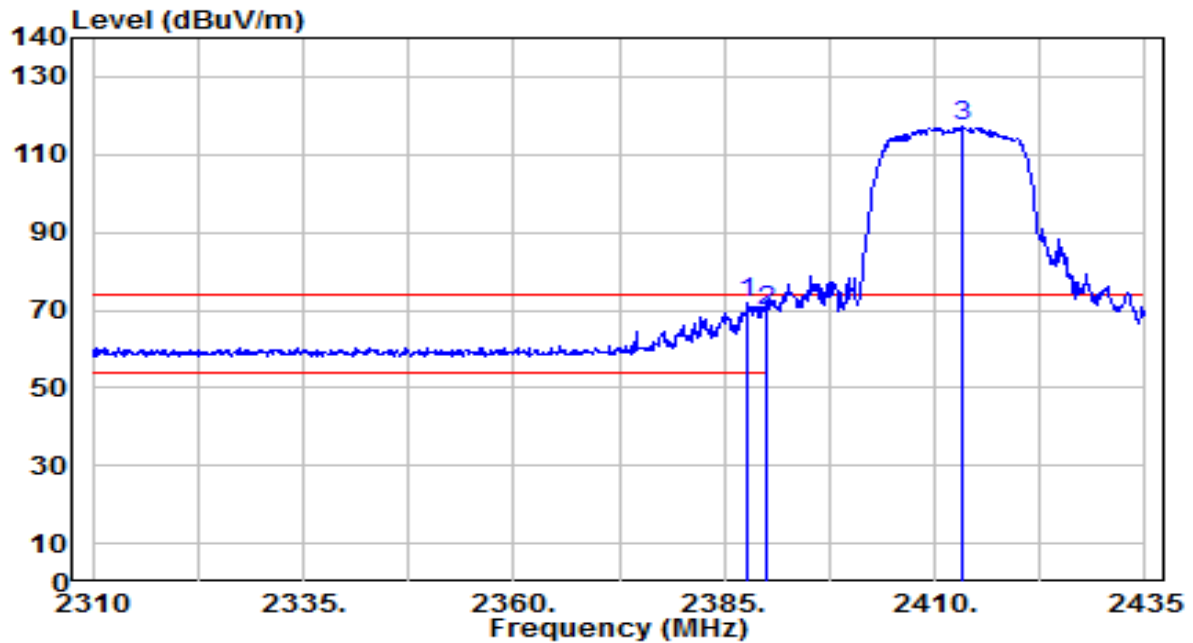


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2387.750        | 39.65          | 31.94      | 71.59                | -2.41       | 74.00          | 150         | 45          | Peak              |
| 2  |   | 2390.000        | 37.89          | 31.95      | 69.84                | -4.16       | 74.00          | 150         | 45          | Peak              |
| 3  |   | 2413.250        | 85.14          | 32.04      | 117.17               | N/A         | N/A            | 150         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

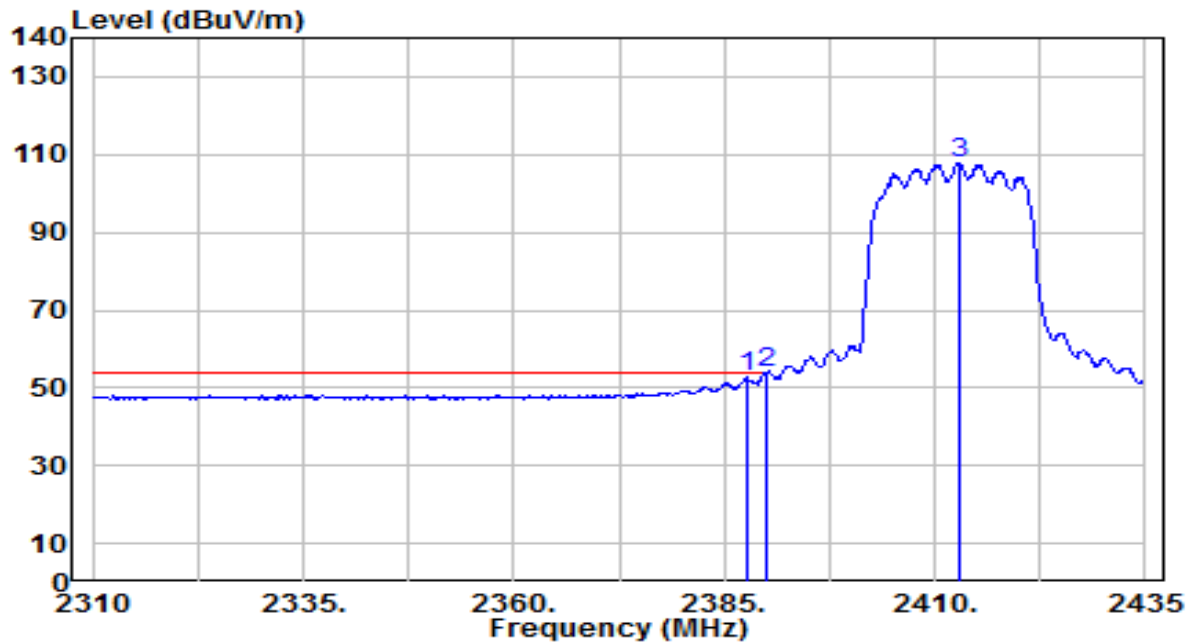


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.625        | 20.66          | 31.94      | 52.60                | -1.40       | 54.00          | 150         | 45          | Average           |
| 2  | * | 2390.000        | 21.76          | 31.95      | 53.71                | -0.29       | 54.00          | 150         | 45          | Average           |
| 3  |   | 2412.875        | 75.68          | 32.03      | 107.71               | N/A         | N/A            | 150         | 45          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

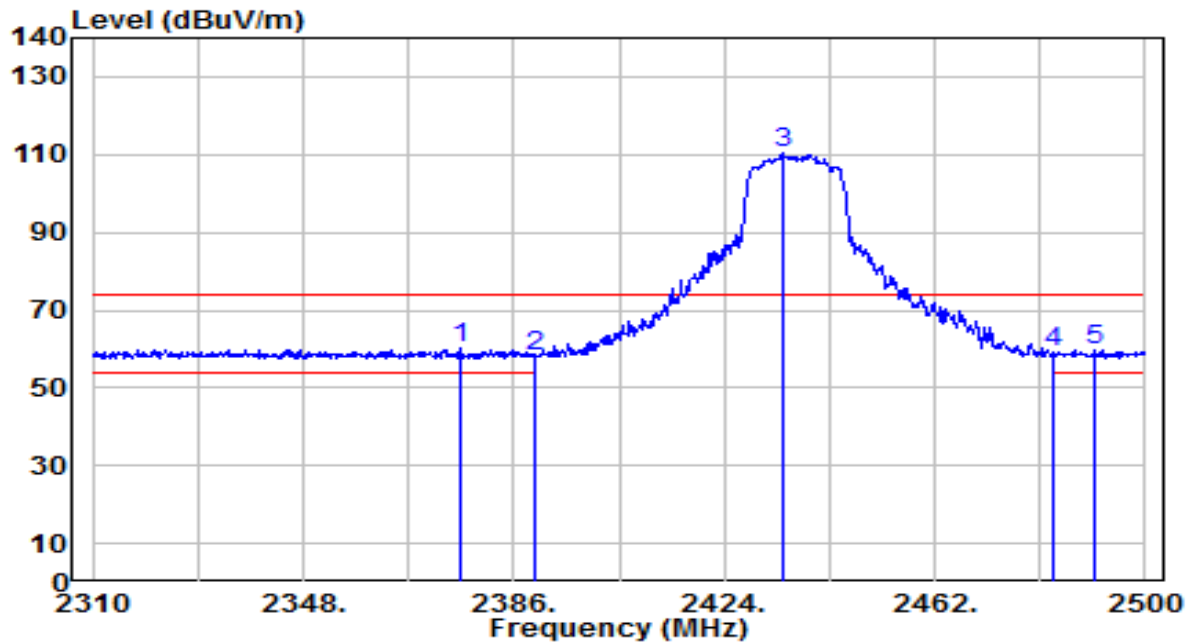


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2376.310        | 28.06          | 31.90      | 59.96                | -14.04      | 74.00          | 195         | 305         | Peak              |
| 2  |   | 2390.000        | 26.07          | 31.95      | 58.02                | -15.98      | 74.00          | 195         | 305         | Peak              |
| 3  |   | 2434.450        | 78.07          | 32.11      | 110.19               | N/A         | N/A            | 195         | 305         | Peak              |
| 4  |   | 2483.500        | 26.87          | 32.30      | 59.17                | -14.83      | 74.00          | 195         | 305         | Peak              |
| 5  |   | 2491.070        | 27.44          | 32.33      | 59.77                | -14.23      | 74.00          | 195         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

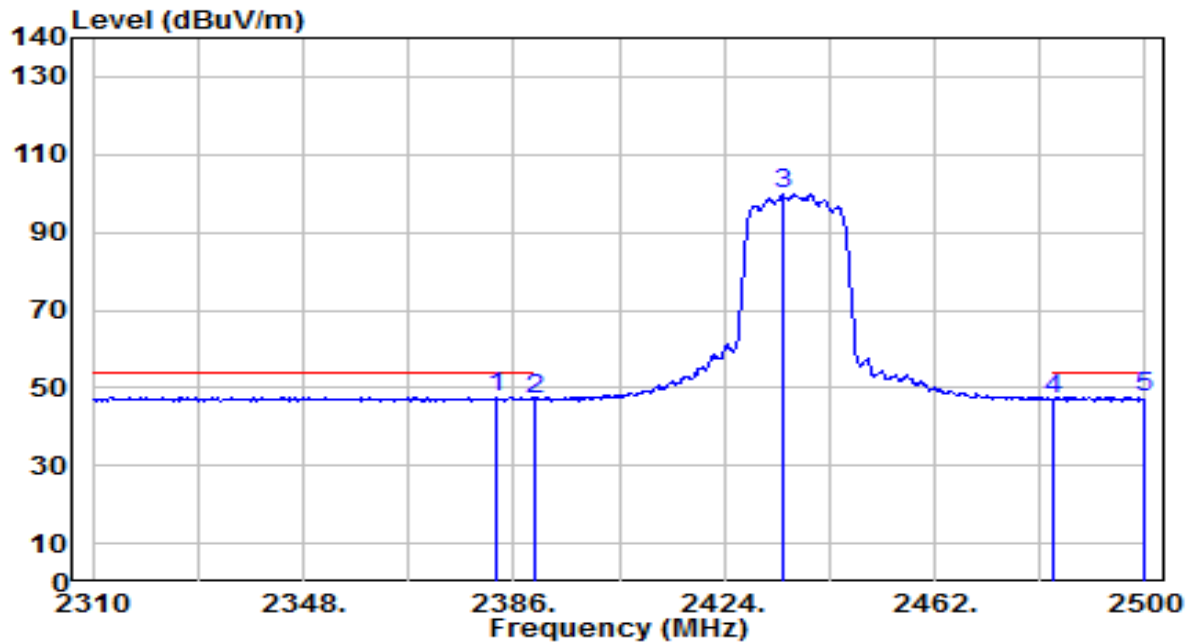


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2382.770        | 15.60          | 31.92      | 47.52                | -6.48       | 54.00          | 195         | 305         | Average           |
| 2  |   | 2390.000        | 15.10          | 31.95      | 47.05                | -6.95       | 54.00          | 195         | 305         | Average           |
| 3  |   | 2434.640        | 67.61          | 32.12      | 99.73                | N/A         | N/A            | 195         | 305         | Average           |
| 4  |   | 2483.500        | 14.94          | 32.30      | 47.23                | -6.77       | 54.00          | 195         | 305         | Average           |
| 5  | * | 2500.000        | 15.18          | 32.36      | 47.54                | -6.46       | 54.00          | 195         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

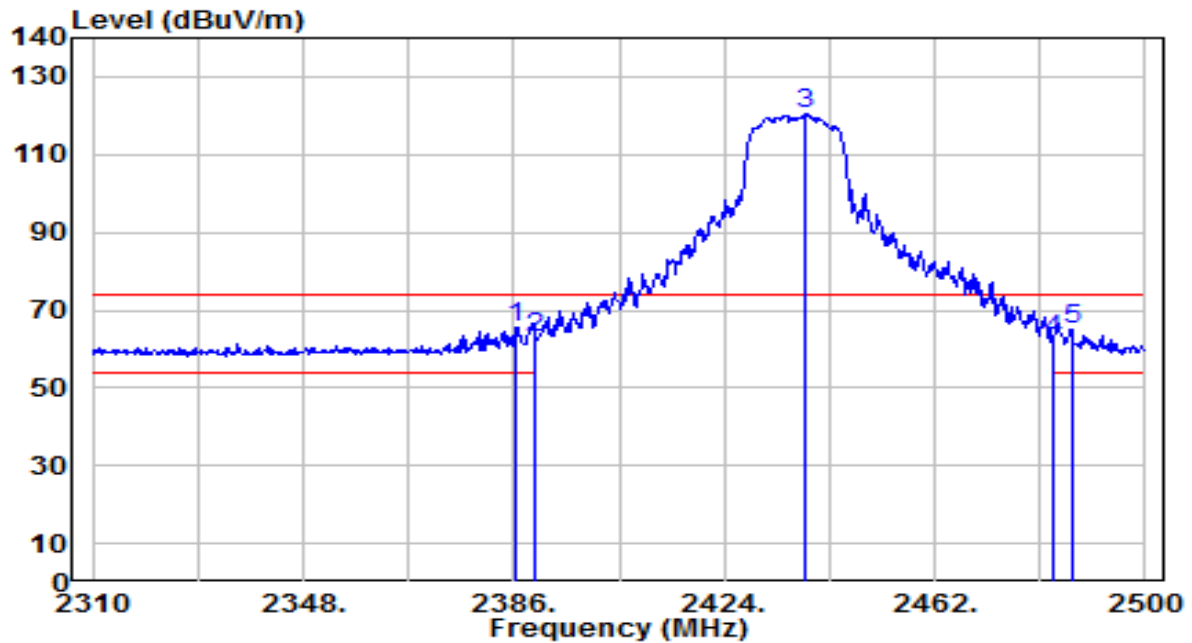


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.570        | 33.59          | 31.94      | 65.53                | -8.47       | 74.00          | 220         | 85          | Peak              |
| 2  |   | 2390.000        | 30.87          | 31.95      | 62.82                | -11.18      | 74.00          | 220         | 85          | Peak              |
| 3  |   | 2438.820        | 88.54          | 32.13      | 120.67               | N/A         | N/A            | 220         | 85          | Peak              |
| 4  |   | 2483.500        | 29.89          | 32.30      | 62.18                | -11.82      | 74.00          | 220         | 85          | Peak              |
| 5  |   | 2486.700        | 32.79          | 32.31      | 65.10                | -8.90       | 74.00          | 220         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

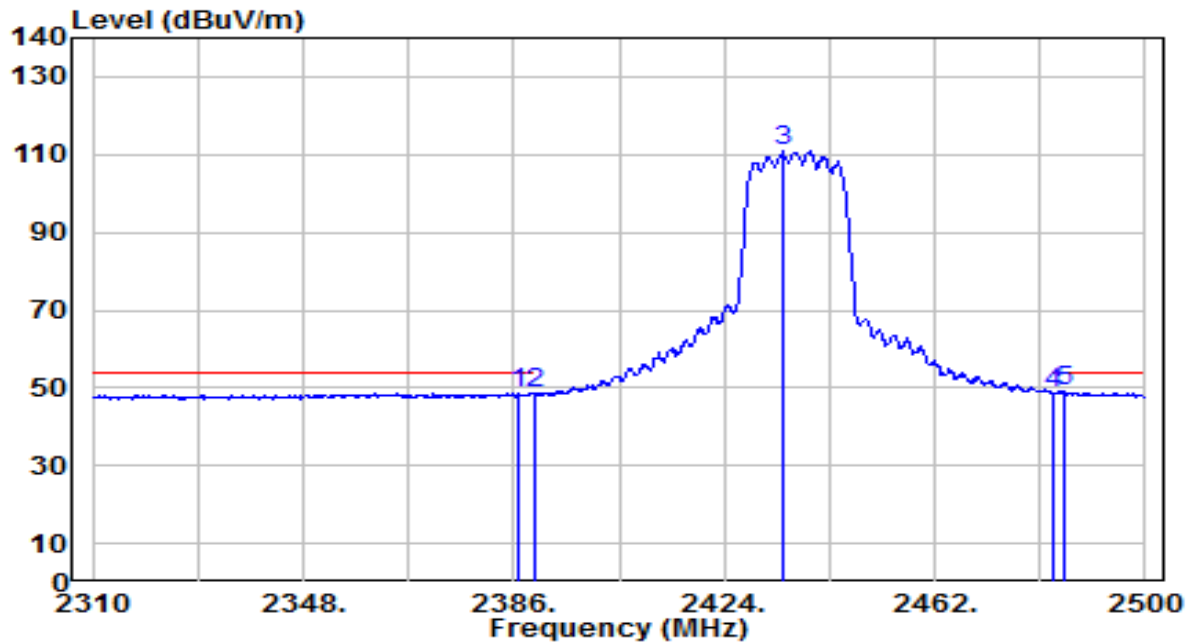


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2386.760        | 16.64          | 31.94      | 48.57                | -5.43       | 54.00          | 220         | 85          | Average           |
| 2  |   | 2390.000        | 16.41          | 31.95      | 48.36                | -5.64       | 54.00          | 220         | 85          | Average           |
| 3  |   | 2434.640        | 78.84          | 32.12      | 110.95               | N/A         | N/A            | 220         | 85          | Average           |
| 4  |   | 2483.500        | 16.48          | 32.30      | 48.78                | -5.22       | 54.00          | 220         | 85          | Average           |
| 5  | * | 2485.180        | 16.57          | 32.30      | 48.87                | -5.13       | 54.00          | 220         | 85          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

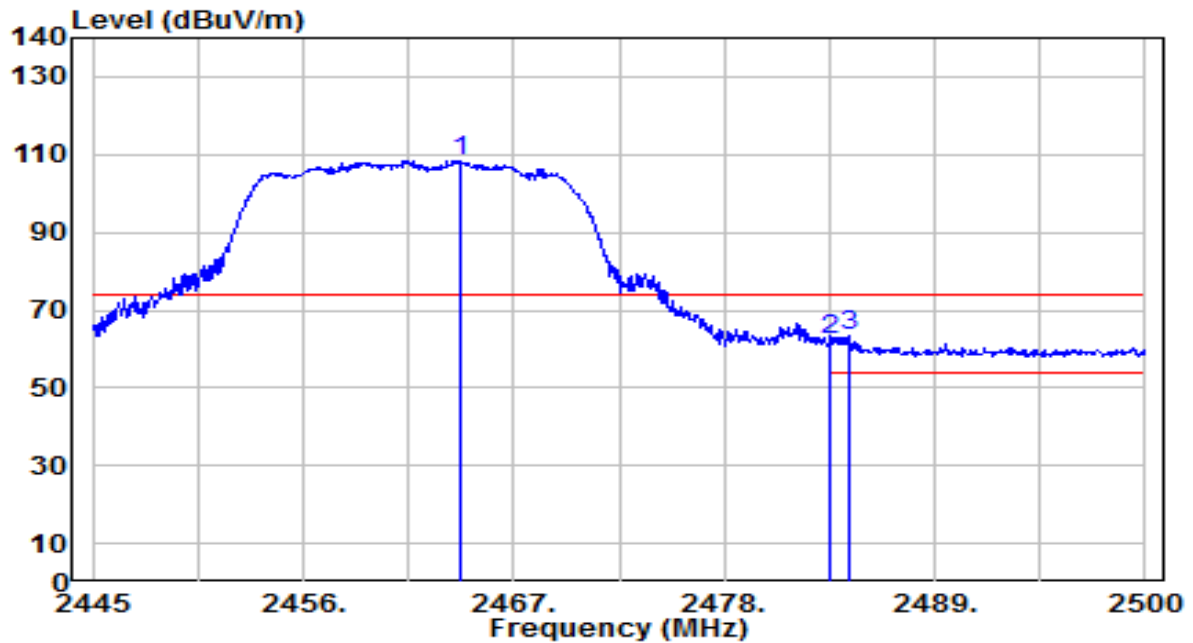


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2464.195        | 76.21          | 32.23      | 108.43               | N/A         | N/A            | 265         | 305         | Peak              |
| 2  | 2483.500        | 29.84          | 32.30      | 62.14                | -11.86      | 74.00          | 265         | 305         | Peak              |
| 3  | * 2484.545      | 31.14          | 32.30      | 63.44                | -10.56      | 74.00          | 265         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

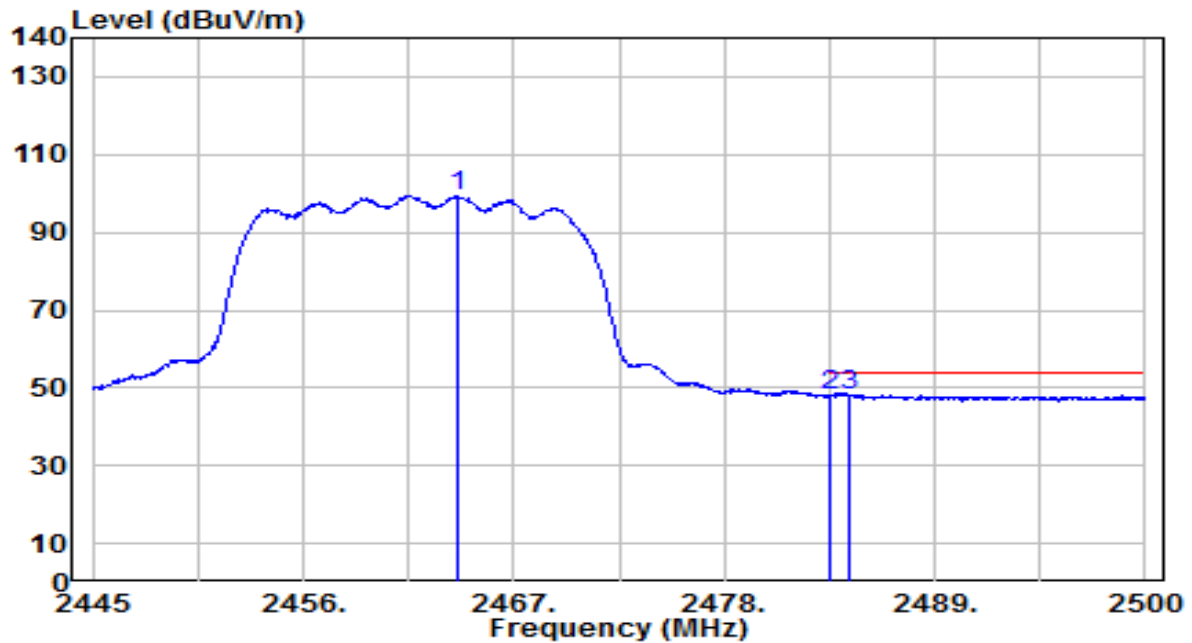


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2464.140        | 67.30          | 32.23      | 99.53                | N/A         | N/A            | 265         | 305         | Average           |
| 2  | 2483.500        | 15.61          | 32.30      | 47.91                | -6.09       | 54.00          | 265         | 305         | Average           |
| 3  | * 2484.600      | 15.92          | 32.30      | 48.22                | -5.78       | 54.00          | 265         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

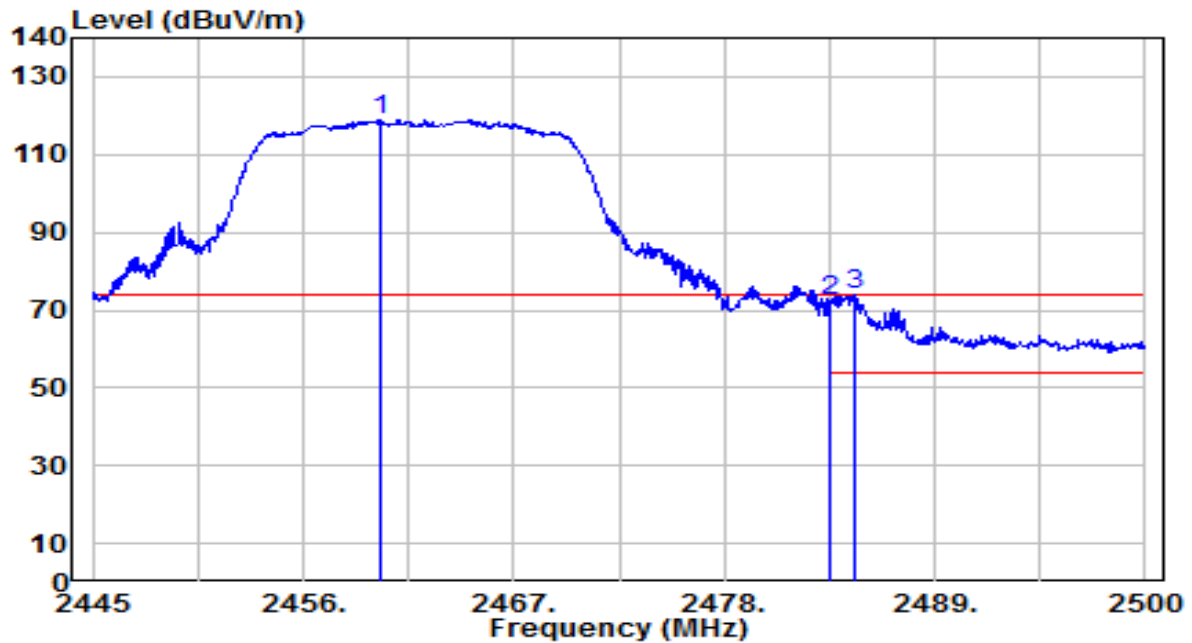


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.015        | 86.71          | 32.21      | 118.92               | N/A         | N/A            | 190         | 85          | Peak              |
| 2  | 2483.500        | 39.99          | 32.30      | 72.28                | -1.72       | 74.00          | 190         | 85          | Peak              |
| 3  | * 2484.875      | 41.40          | 32.30      | 73.70                | -0.30       | 74.00          | 190         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

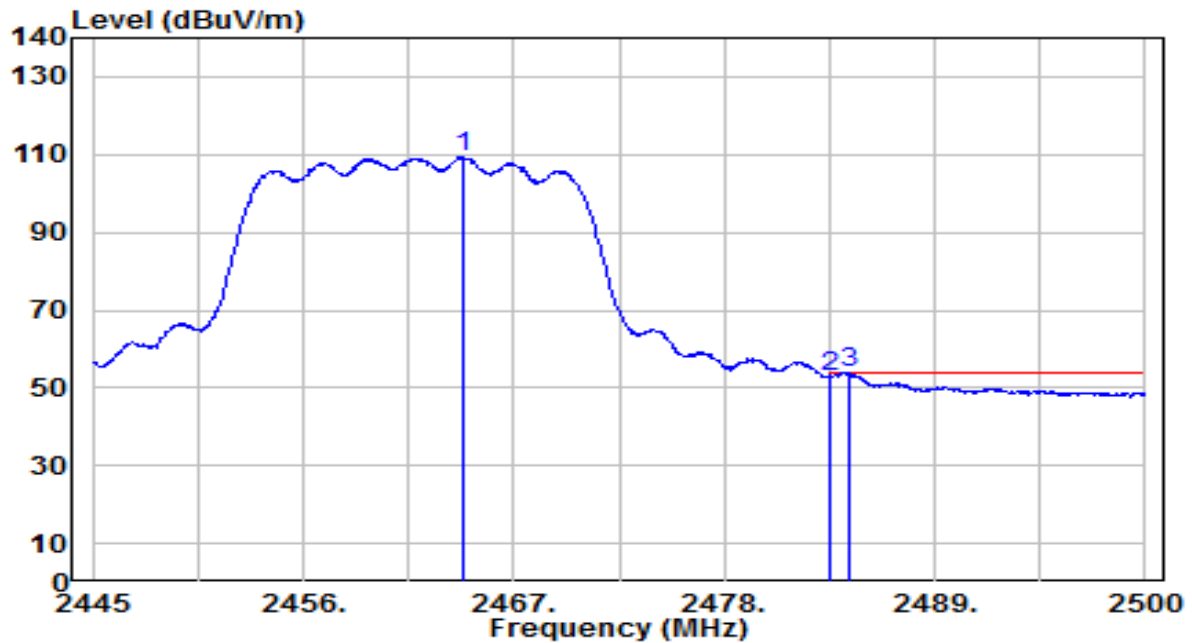


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2464.305        | 77.21          | 32.23      | 109.44               | N/A         | N/A            | 190         | 85          | Average           |
| 2  |   | 2483.500        | 20.43          | 32.30      | 52.73                | -1.27       | 54.00          | 190         | 85          | Average           |
| 3  | * | 2484.545        | 21.57          | 32.30      | 53.87                | -0.13       | 54.00          | 190         | 85          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

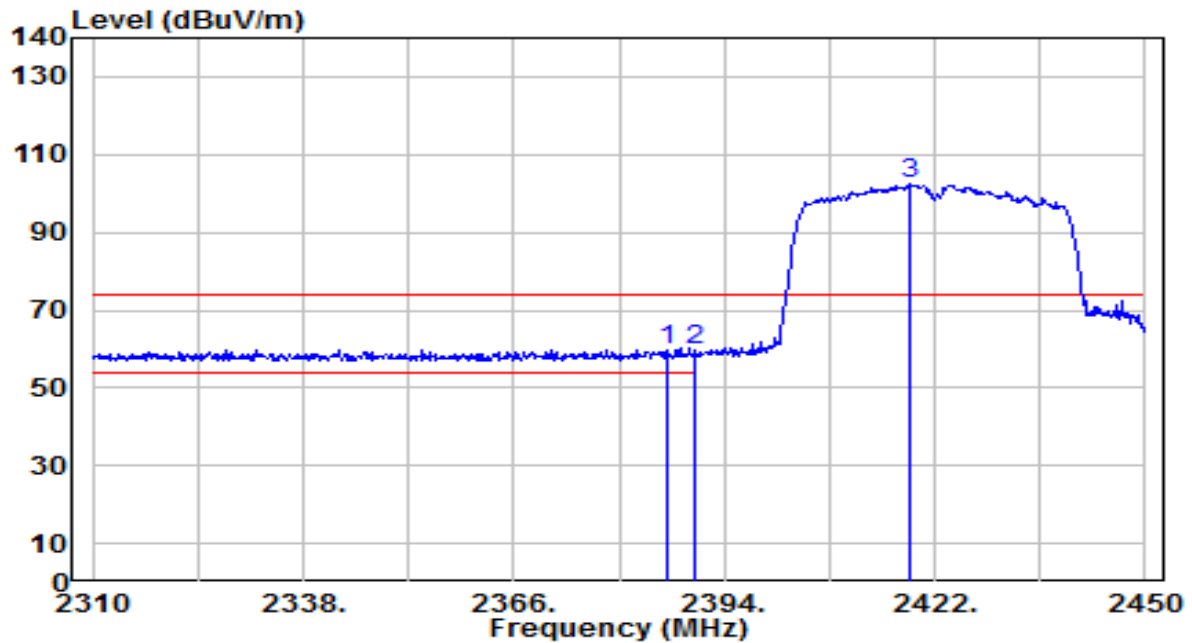


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.440        | 27.84          | 31.94      | 59.78                | -14.22      | 74.00          | 130         | 285         | Peak              |
| 2  |   | 2390.000        | 27.77          | 31.95      | 59.71                | -14.29      | 74.00          | 130         | 285         | Peak              |
| 3  |   | 2418.640        | 70.41          | 32.06      | 102.46               | N/A         | N/A            | 130         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

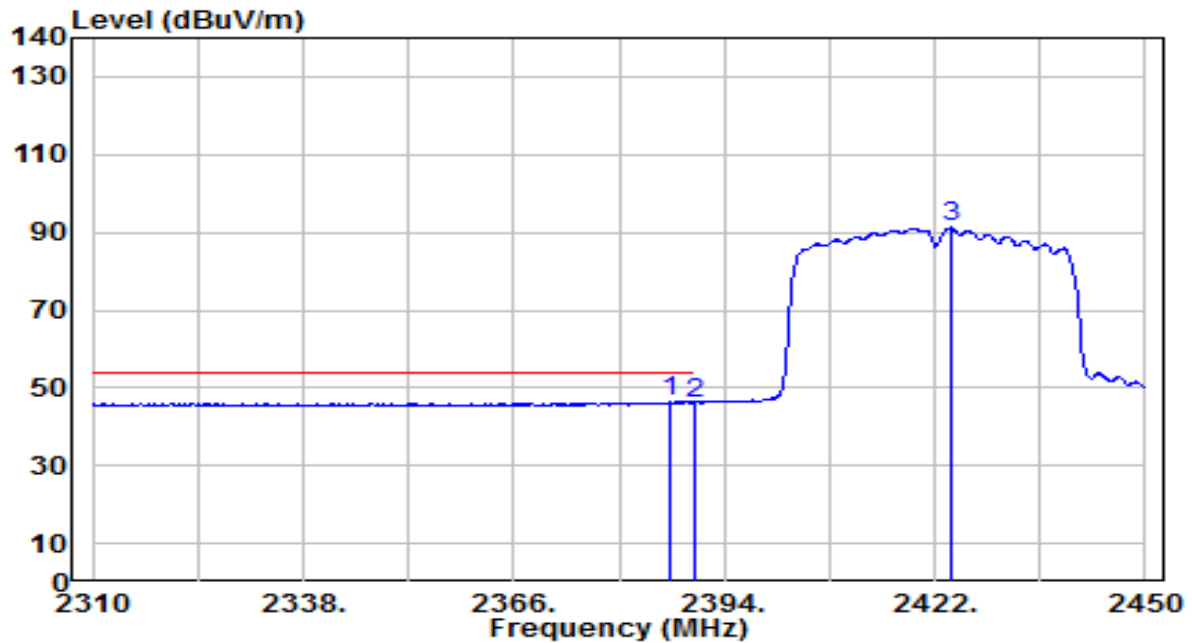


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.860        | 14.41          | 31.94      | 46.34                | -7.66       | 54.00          | 130         | 285         | Average           |
| 2  |   | 2390.000        | 14.24          | 31.95      | 46.19                | -7.81       | 54.00          | 130         | 285         | Average           |
| 3  |   | 2424.100        | 59.07          | 32.08      | 91.14                | N/A         | N/A            | 130         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

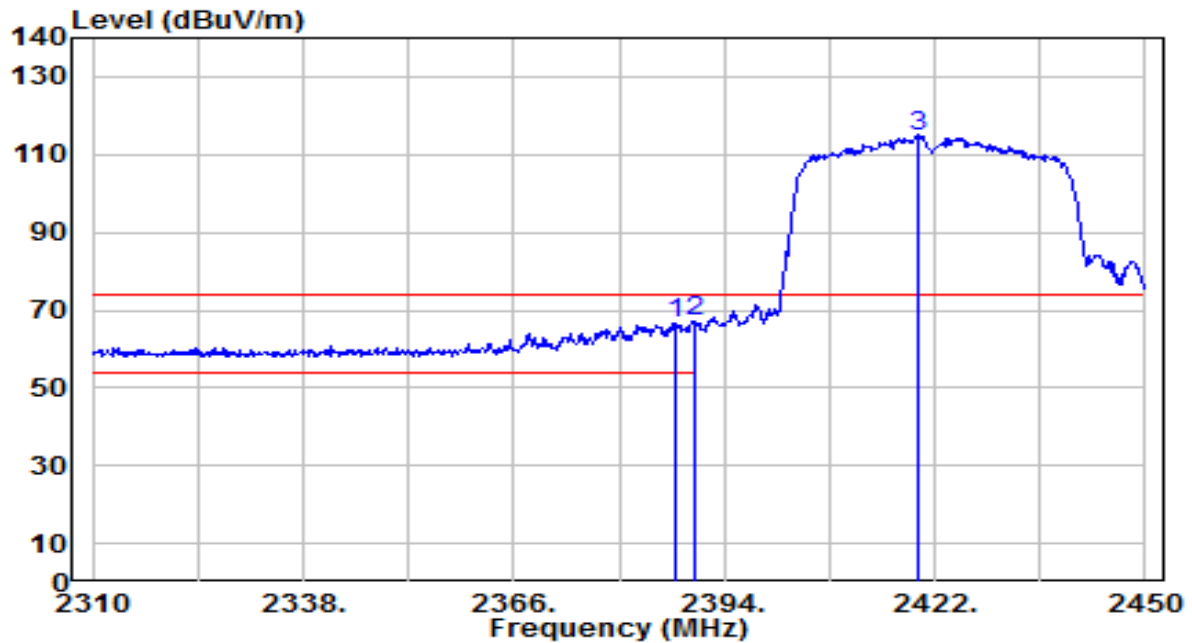


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.560        | 34.76          | 31.94      | 66.70                | -7.30       | 74.00          | 150         | 45          | Peak              |
| 2  | * | 2390.000        | 35.06          | 31.95      | 67.01                | -6.99       | 74.00          | 150         | 45          | Peak              |
| 3  |   | 2419.900        | 82.32          | 32.06      | 114.38               | N/A         | N/A            | 150         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

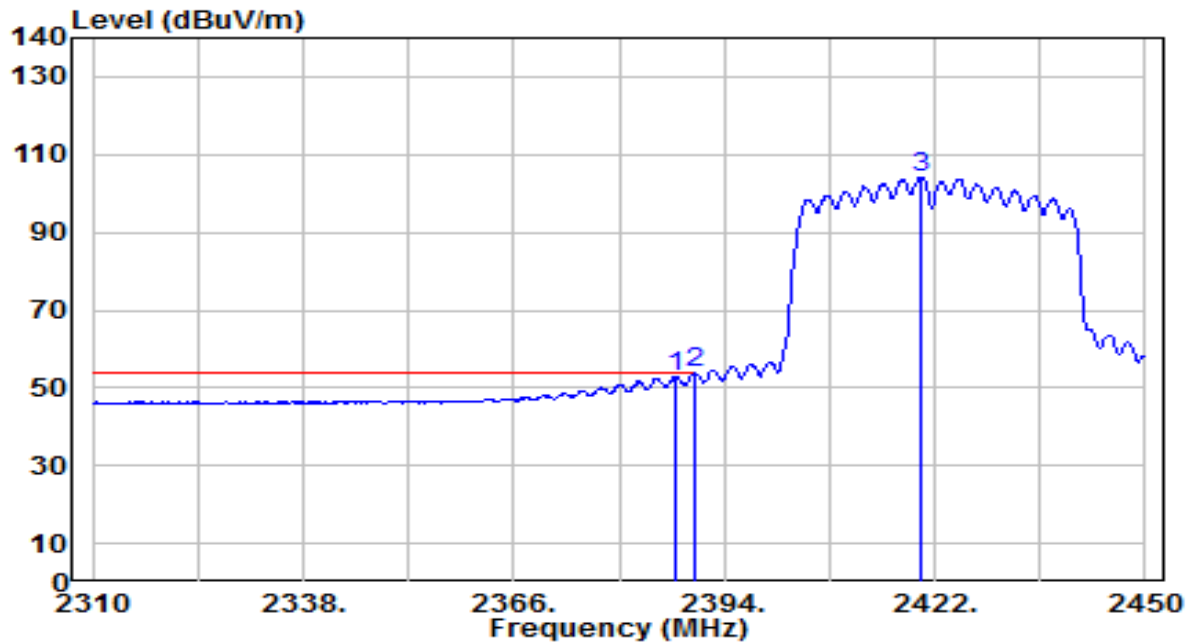


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.420        | 20.89          | 31.94      | 52.82                | -1.18       | 54.00          | 150         | 45          | Average           |
| 2  | * | 2390.000        | 21.76          | 31.95      | 53.71                | -0.29       | 54.00          | 150         | 45          | Average           |
| 3  |   | 2420.180        | 72.16          | 32.06      | 104.22               | N/A         | N/A            | 150         | 45          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

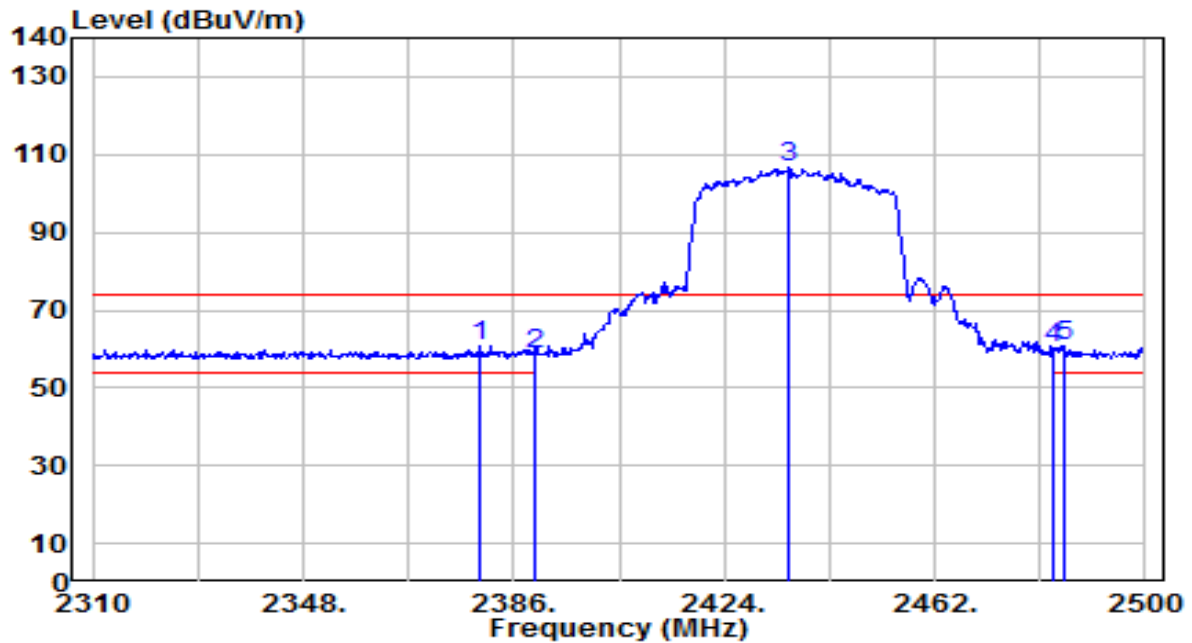


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2379.730        | 28.78          | 31.91      | 60.69                | -13.31      | 74.00          | 195         | 305         | Peak              |
| 2  | 2390.000        | 26.48          | 31.95      | 58.43                | -15.57      | 74.00          | 195         | 305         | Peak              |
| 3  | 2435.780        | 74.35          | 32.12      | 106.47               | N/A         | N/A            | 195         | 305         | Peak              |
| 4  | 2483.500        | 27.85          | 32.30      | 60.15                | -13.85      | 74.00          | 195         | 305         | Peak              |
| 5  | * 2485.370      | 28.68          | 32.31      | 60.98                | -13.02      | 74.00          | 195         | 305         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

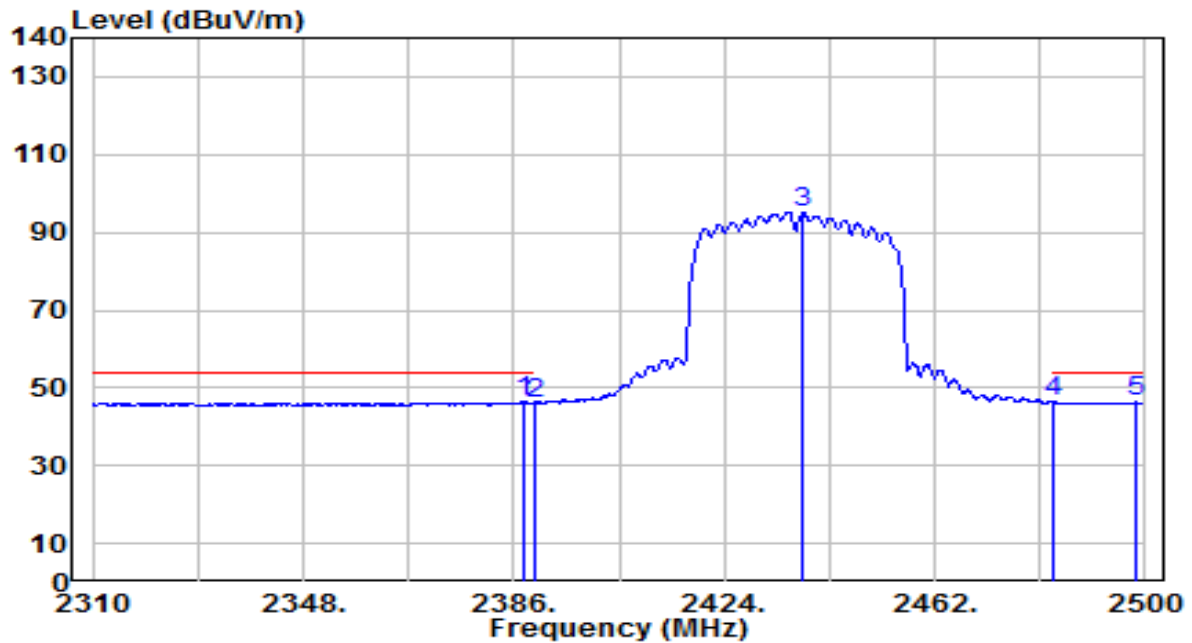


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2387.710        | 14.43          | 31.94      | 46.37                | -7.63       | 54.00          | 195         | 305         | Average           |
| 2  |   | 2390.000        | 14.24          | 31.95      | 46.19                | -7.81       | 54.00          | 195         | 305         | Average           |
| 3  |   | 2438.250        | 63.14          | 32.13      | 95.26                | N/A         | N/A            | 195         | 305         | Average           |
| 4  |   | 2483.500        | 13.95          | 32.30      | 46.25                | -7.75       | 54.00          | 195         | 305         | Average           |
| 5  |   | 2498.100        | 13.89          | 32.35      | 46.24                | -7.76       | 54.00          | 195         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

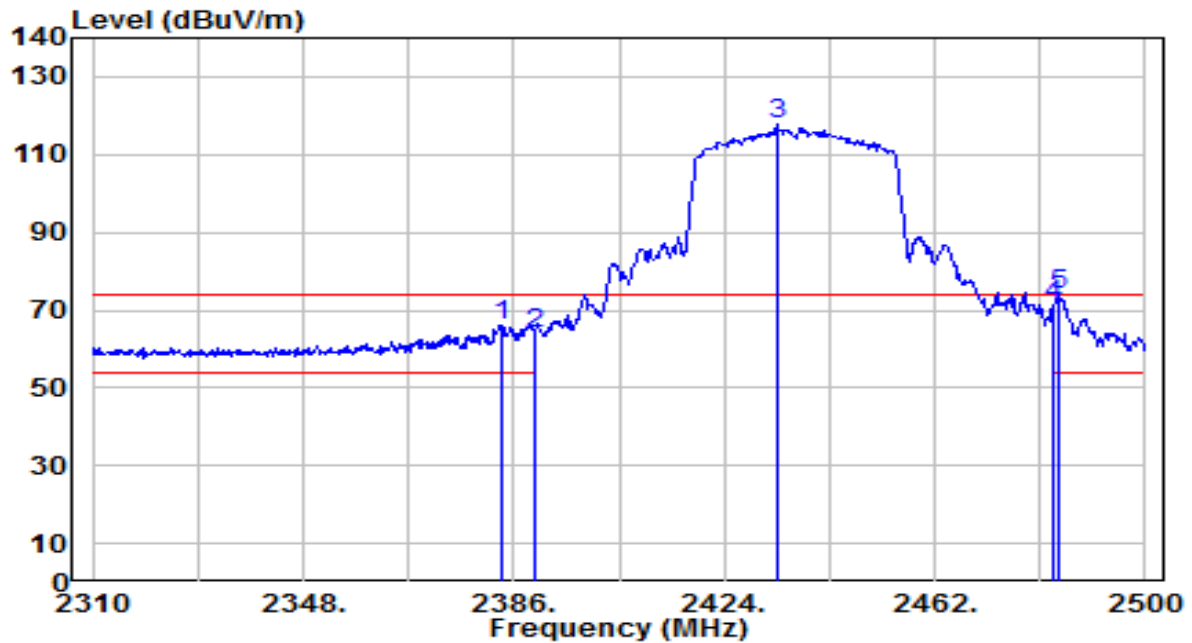


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2383.910        | 33.95          | 31.93      | 65.87                | -8.13       | 74.00          | 220         | 85          | Peak              |
| 2  |   | 2390.000        | 32.16          | 31.95      | 64.11                | -9.89       | 74.00          | 220         | 85          | Peak              |
| 3  |   | 2433.500        | 85.62          | 32.11      | 117.73               | N/A         | N/A            | 220         | 85          | Peak              |
| 4  |   | 2483.500        | 39.27          | 32.30      | 71.56                | -2.44       | 74.00          | 220         | 85          | Peak              |
| 5  | * | 2484.610        | 41.55          | 32.30      | 73.85                | -0.15       | 74.00          | 220         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 6_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

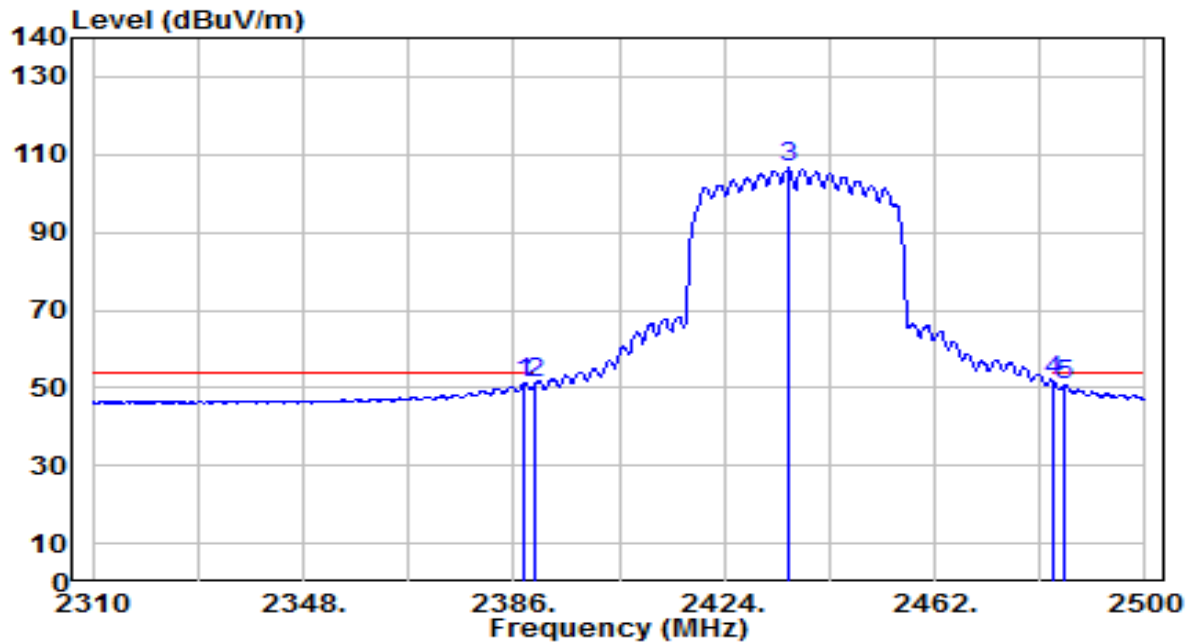


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.900        | 19.11          | 31.94      | 51.05                | -2.95       | 54.00          | 220         | 85          | Average           |
| 2  |   | 2390.000        | 19.24          | 31.95      | 51.19                | -2.81       | 54.00          | 220         | 85          | Average           |
| 3  |   | 2435.590        | 74.47          | 32.12      | 106.59               | N/A         | N/A            | 220         | 85          | Average           |
| 4  | * | 2483.500        | 19.35          | 32.30      | 51.64                | -2.36       | 54.00          | 220         | 85          | Average           |
| 5  |   | 2485.560        | 18.21          | 32.31      | 50.51                | -3.49       | 54.00          | 220         | 85          | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

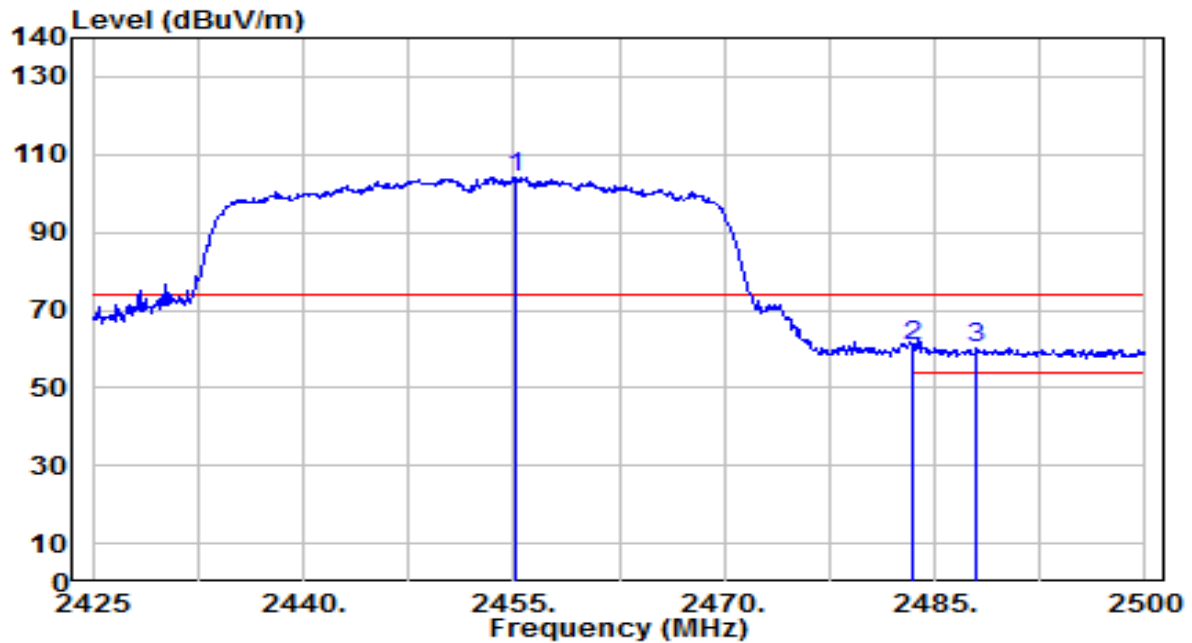


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2455.225        | 71.84          | 32.19      | 104.03               | N/A         | N/A            | 265         | 305         | Peak              |
| 2  | * | 2483.500        | 28.64          | 32.30      | 60.94                | -13.06      | 74.00          | 265         | 305         | Peak              |
| 3  |   | 2487.925        | 28.03          | 32.31      | 60.34                | -13.66      | 74.00          | 265         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

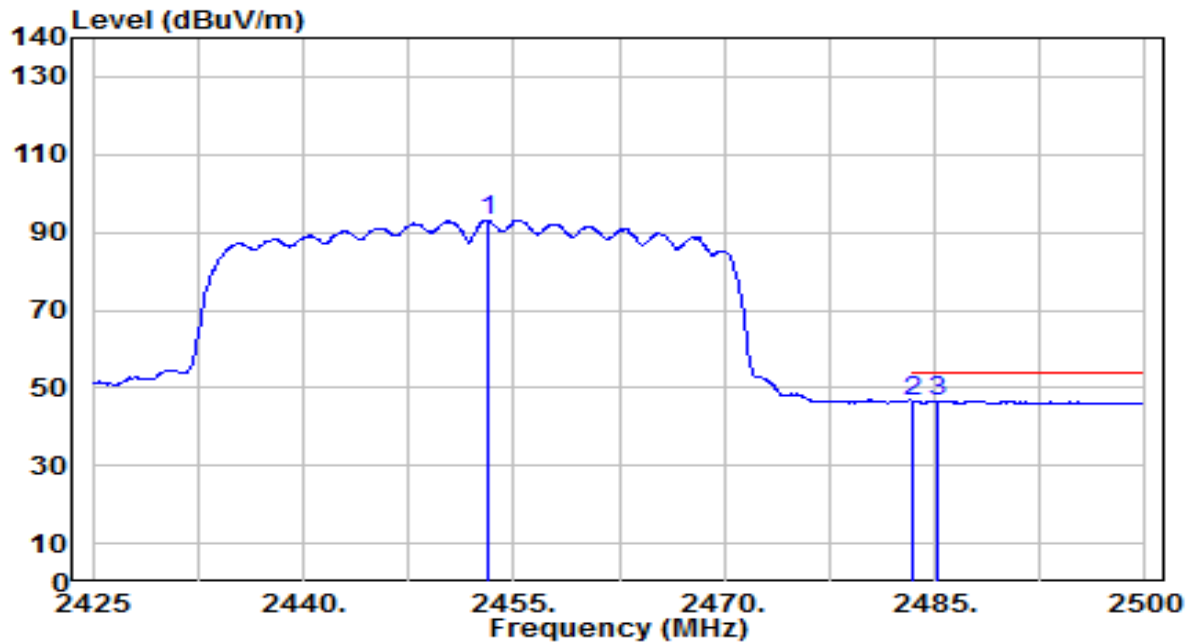


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2453.200        | 60.83          | 32.18      | 93.01                | N/A         | N/A            | 265         | 305         | Average           |
| 2  |   | 2483.500        | 14.19          | 32.30      | 46.49                | -7.51       | 54.00          | 265         | 305         | Average           |
| 3  | * | 2485.225        | 14.33          | 32.30      | 46.63                | -7.37       | 54.00          | 265         | 305         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

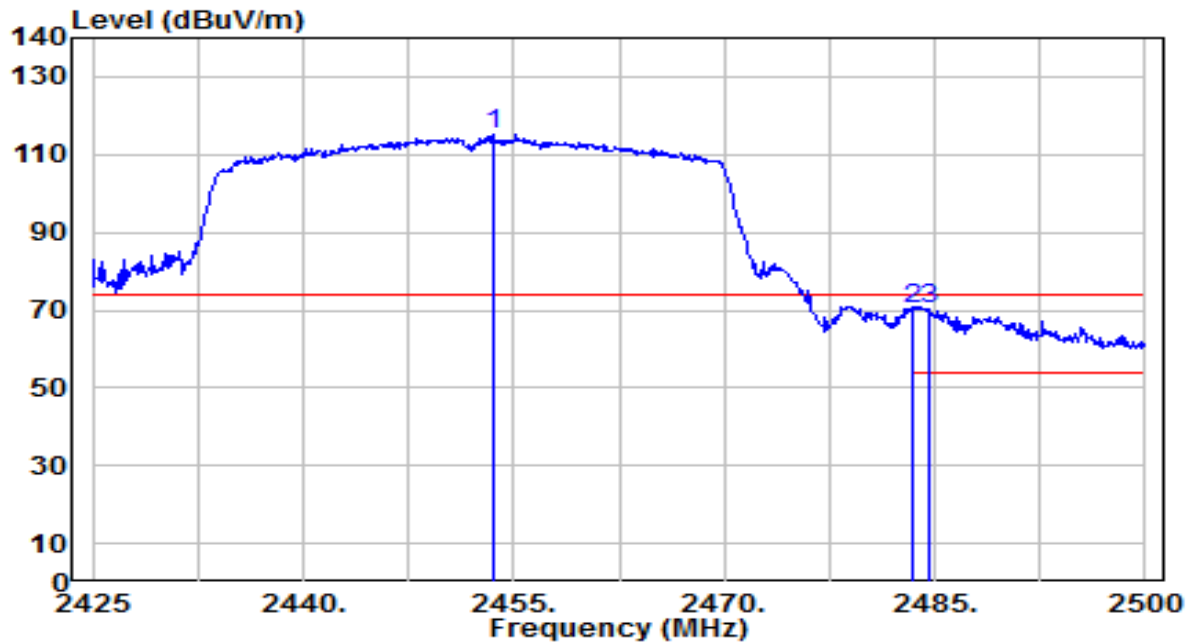


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2453.575        | 82.83          | 32.19      | 115.02               | N/A         | N/A            | 190         | 85          | Peak              |
| 2  | * | 2483.500        | 37.95          | 32.30      | 70.25                | -3.75       | 74.00          | 190         | 85          | Peak              |
| 3  |   | 2484.550        | 37.90          | 32.30      | 70.20                | -3.80       | 74.00          | 190         | 85          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1          | Test Voltage         | AC 120V/60Hz |

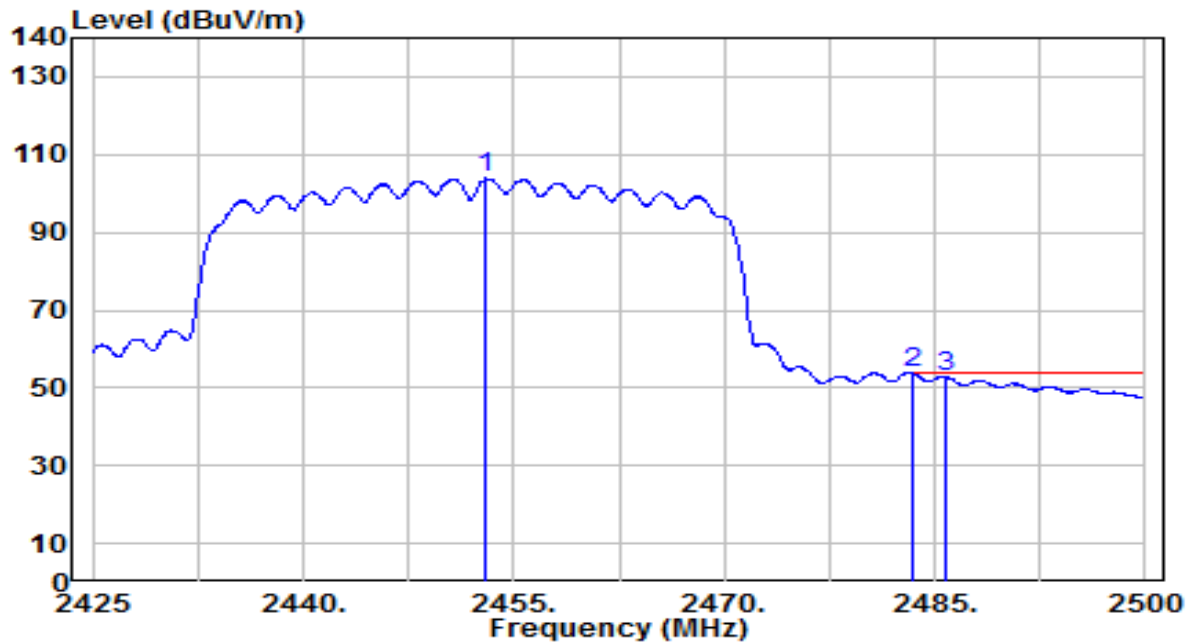


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2453.050        | 71.66          | 32.18      | 103.84               | N/A         | N/A            | 190         | 85          | Average           |
| 2  | * | 2483.500        | 21.42          | 32.30      | 53.72                | -0.28       | 54.00          | 190         | 85          | Average           |
| 3  |   | 2485.750        | 20.66          | 32.31      | 52.97                | -1.03       | 54.00          | 190         | 85          | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

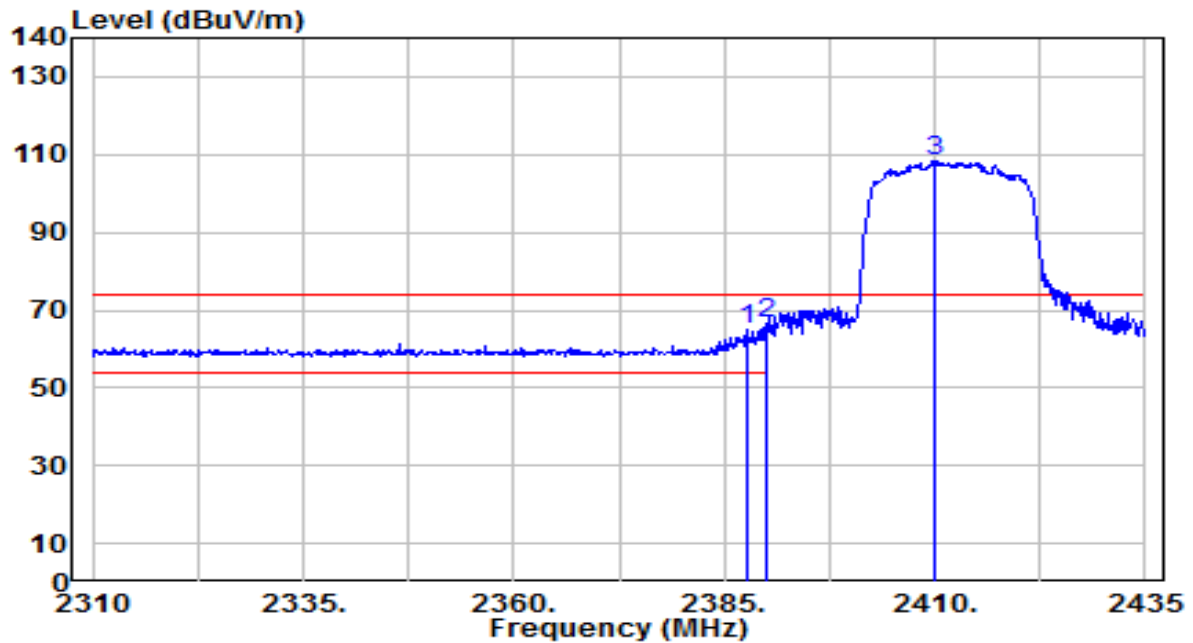


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.625        | 33.25          | 31.94      | 65.19                | -8.81       | 74.00          | 130         | 285         | Peak              |
| 2  | * | 2390.000        | 34.65          | 31.95      | 66.60                | -7.40       | 74.00          | 130         | 285         | Peak              |
| 3  |   | 2410.000        | 76.45          | 32.02      | 108.47               | N/A         | N/A            | 130         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

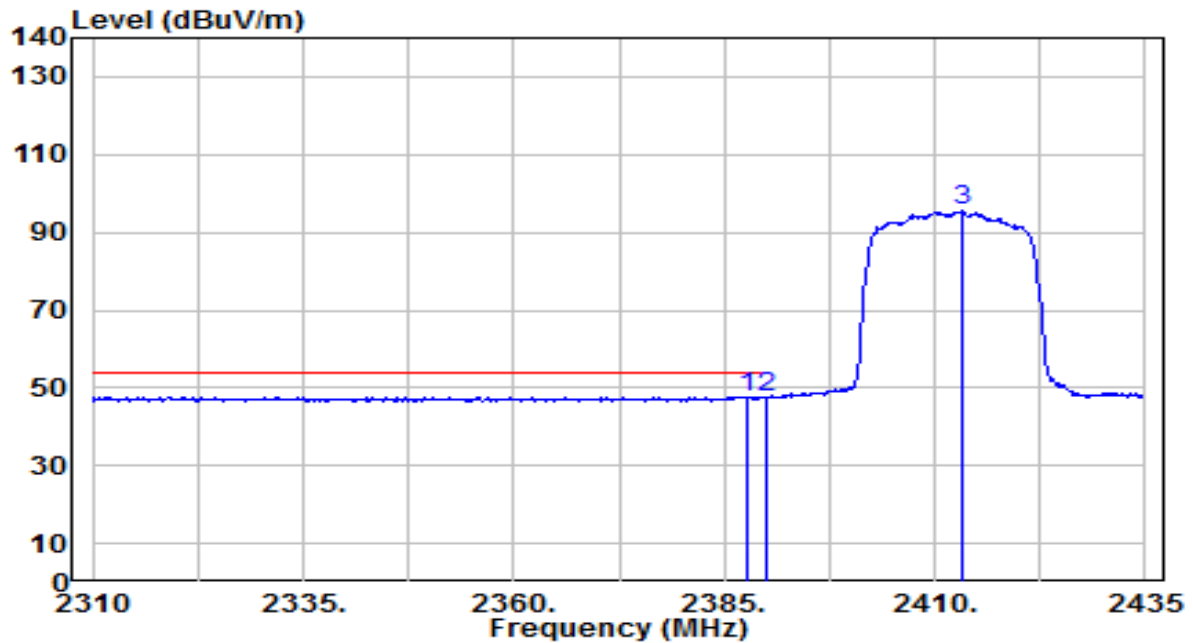


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2387.875        | 15.78          | 31.94      | 47.72                | -6.28       | 54.00          | 130         | 285         | Average           |
| 2  |   | 2390.000        | 15.45          | 31.95      | 47.39                | -6.61       | 54.00          | 130         | 285         | Average           |
| 3  |   | 2413.250        | 63.48          | 32.04      | 95.51                | N/A         | N/A            | 130         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

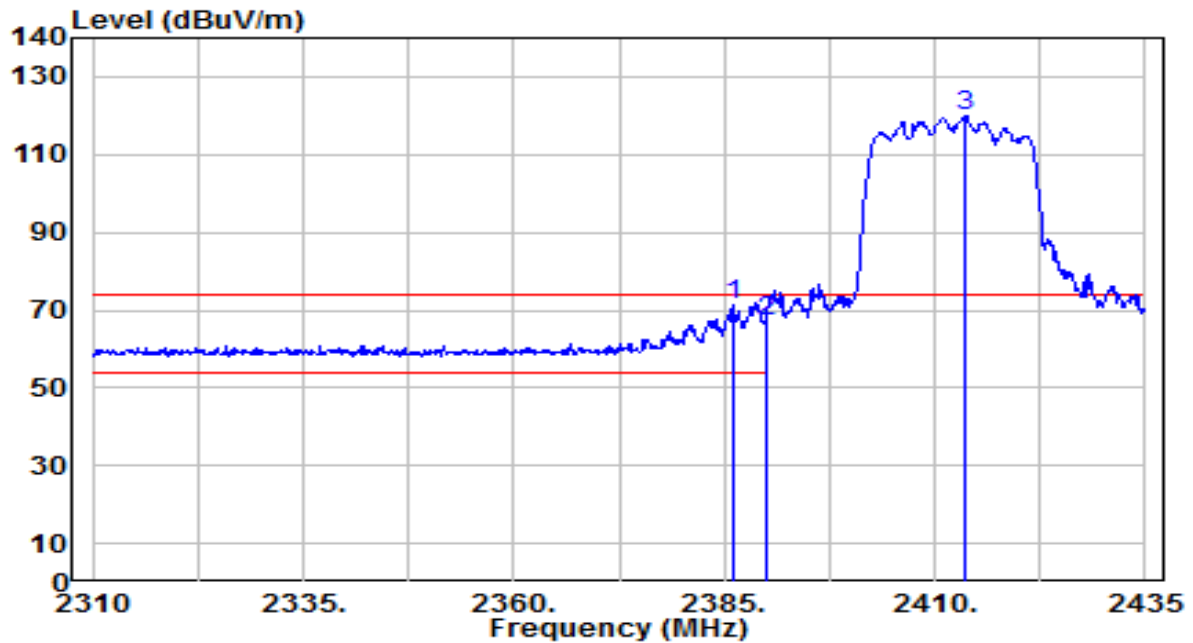


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.125        | 39.57          | 31.93      | 71.50                | -2.50       | 74.00          | 175         | 75          | Peak              |
| 2  |   | 2390.000        | 35.15          | 31.95      | 67.10                | -6.90       | 74.00          | 175         | 75          | Peak              |
| 3  |   | 2413.625        | 87.67          | 32.04      | 119.70               | N/A         | N/A            | 175         | 75          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

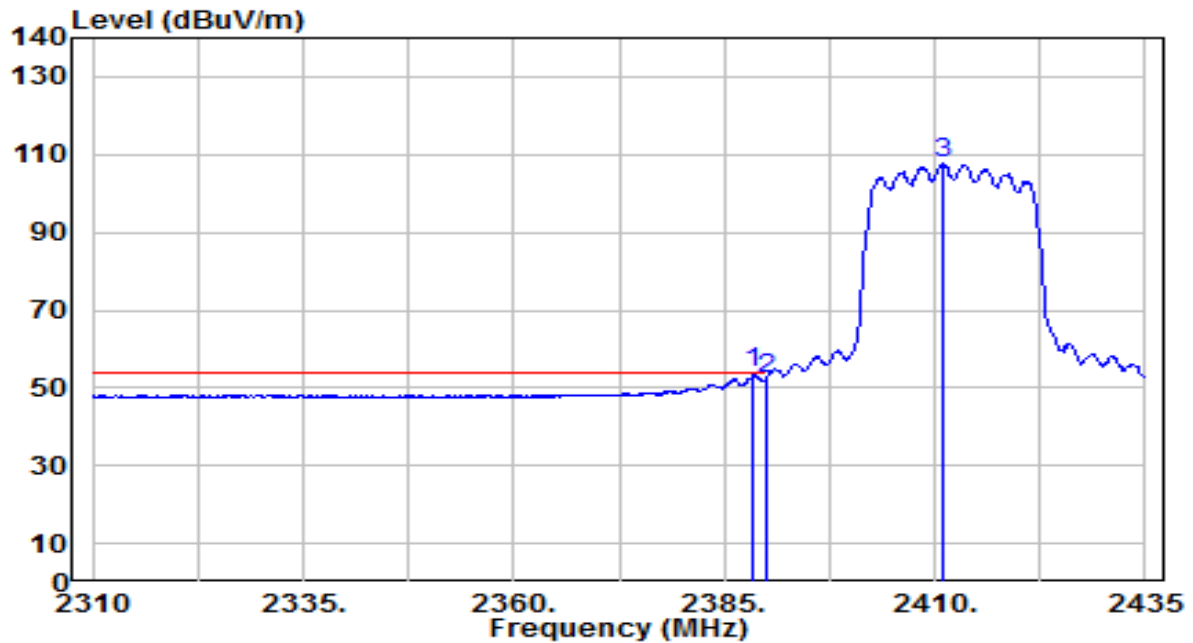


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.375        | 21.77          | 31.94      | 53.71                | -0.29       | 54.00          | 175         | 75          | Average           |
| 2  |   | 2390.000        | 20.28          | 31.95      | 52.23                | -1.77       | 54.00          | 175         | 75          | Average           |
| 3  |   | 2410.875        | 75.74          | 32.03      | 107.77               | N/A         | N/A            | 175         | 75          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

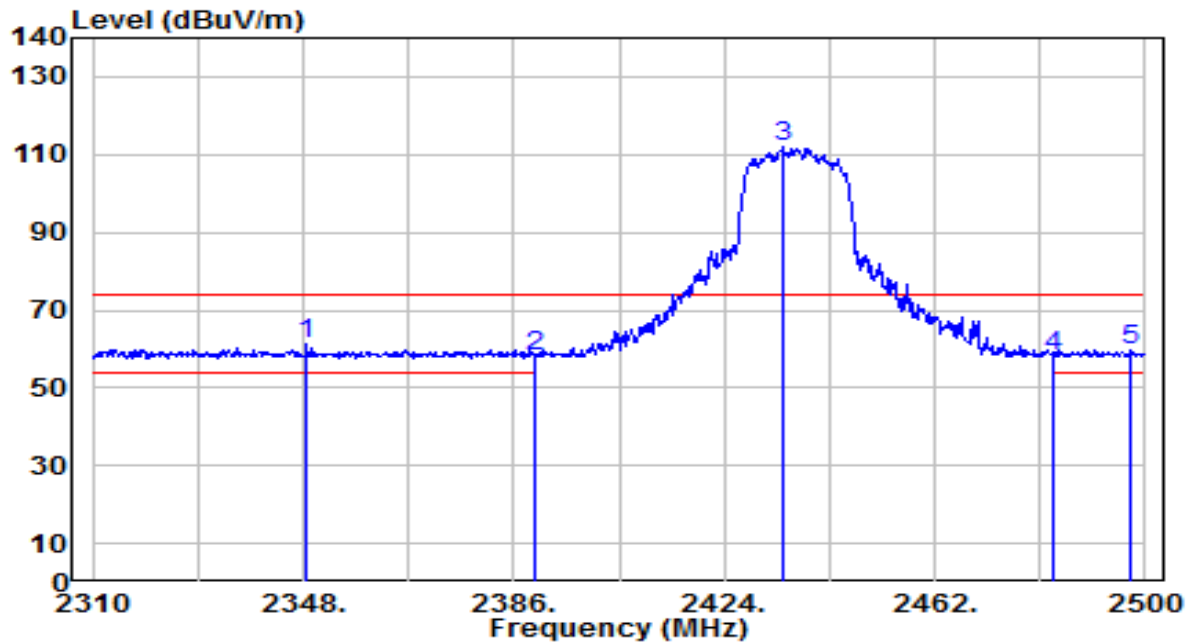


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2348.570        | 29.35          | 31.79      | 61.14                | -12.86      | 74.00          | 195         | 305         | Peak              |
| 2  |   | 2390.000        | 26.24          | 31.95      | 58.19                | -15.81      | 74.00          | 195         | 305         | Peak              |
| 3  |   | 2434.640        | 79.84          | 32.12      | 111.96               | N/A         | N/A            | 195         | 305         | Peak              |
| 4  |   | 2483.500        | 25.81          | 32.30      | 58.11                | -15.89      | 74.00          | 195         | 305         | Peak              |
| 5  |   | 2497.340        | 27.48          | 32.35      | 59.83                | -14.17      | 74.00          | 195         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

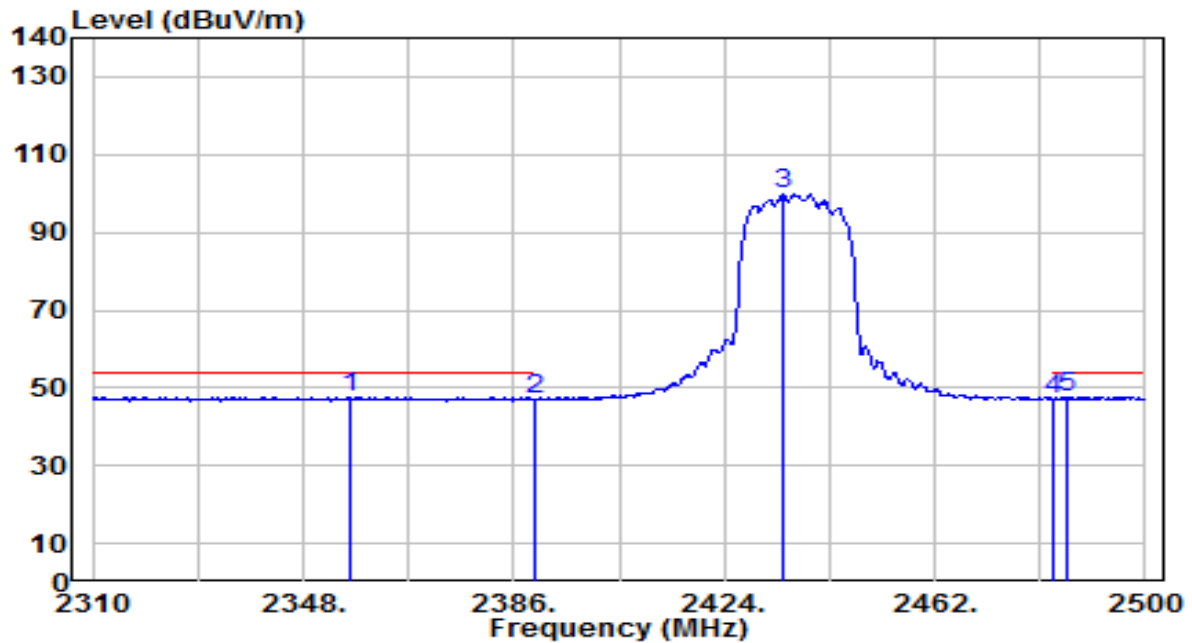


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2356.360        | 15.78          | 31.82      | 47.60                | -6.40       | 54.00          | 195         | 305         | Average           |
| 2  |   | 2390.000        | 15.27          | 31.95      | 47.22                | -6.78       | 54.00          | 195         | 305         | Average           |
| 3  |   | 2434.640        | 67.63          | 32.12      | 99.74                | N/A         | N/A            | 195         | 305         | Average           |
| 4  |   | 2483.500        | 14.62          | 32.30      | 46.92                | -7.08       | 54.00          | 195         | 305         | Average           |
| 5  | * | 2485.750        | 15.38          | 32.31      | 47.69                | -6.31       | 54.00          | 195         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

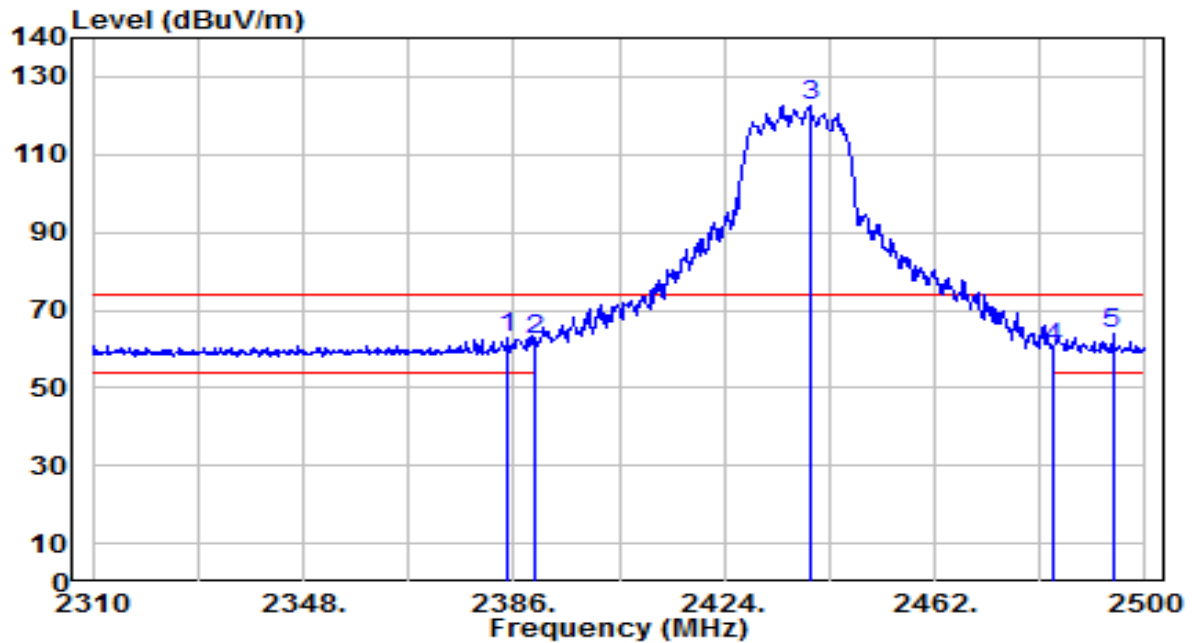


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2385.050        | 31.02          | 31.93      | 62.95                | -11.05      | 74.00          | 170         | 90          | Peak              |
| 2  |   | 2390.000        | 30.58          | 31.95      | 62.53                | -11.47      | 74.00          | 170         | 90          | Peak              |
| 3  |   | 2439.390        | 90.58          | 32.13      | 122.72               | N/A         | N/A            | 170         | 90          | Peak              |
| 4  |   | 2483.500        | 27.84          | 32.30      | 60.14                | -13.86      | 74.00          | 170         | 90          | Peak              |
| 5  | * | 2494.110        | 31.47          | 32.34      | 63.81                | -10.19      | 74.00          | 170         | 90          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

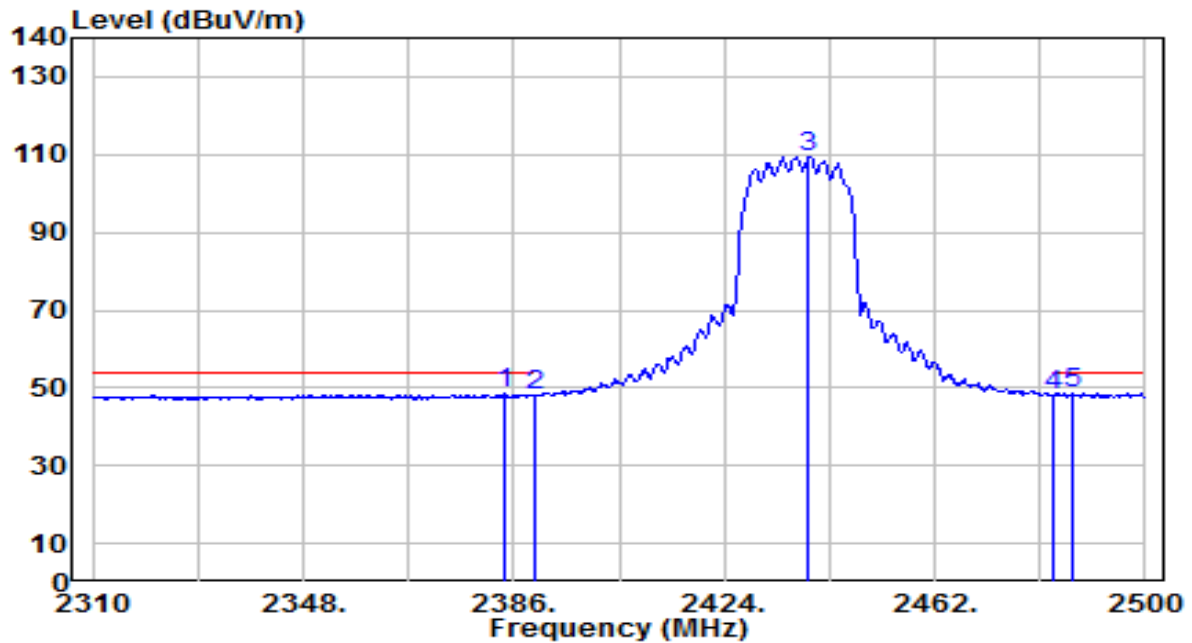


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2384.290        | 16.46          | 31.93      | 48.39                | -5.61       | 54.00          | 170         | 90          | Average           |
| 2  |   | 2390.000        | 16.20          | 31.95      | 48.15                | -5.85       | 54.00          | 170         | 90          | Average           |
| 3  |   | 2439.200        | 77.35          | 32.13      | 109.48               | N/A         | N/A            | 170         | 90          | Average           |
| 4  |   | 2483.500        | 15.93          | 32.30      | 48.23                | -5.77       | 54.00          | 170         | 90          | Average           |
| 5  | * | 2487.080        | 16.15          | 32.31      | 48.46                | -5.54       | 54.00          | 170         | 90          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

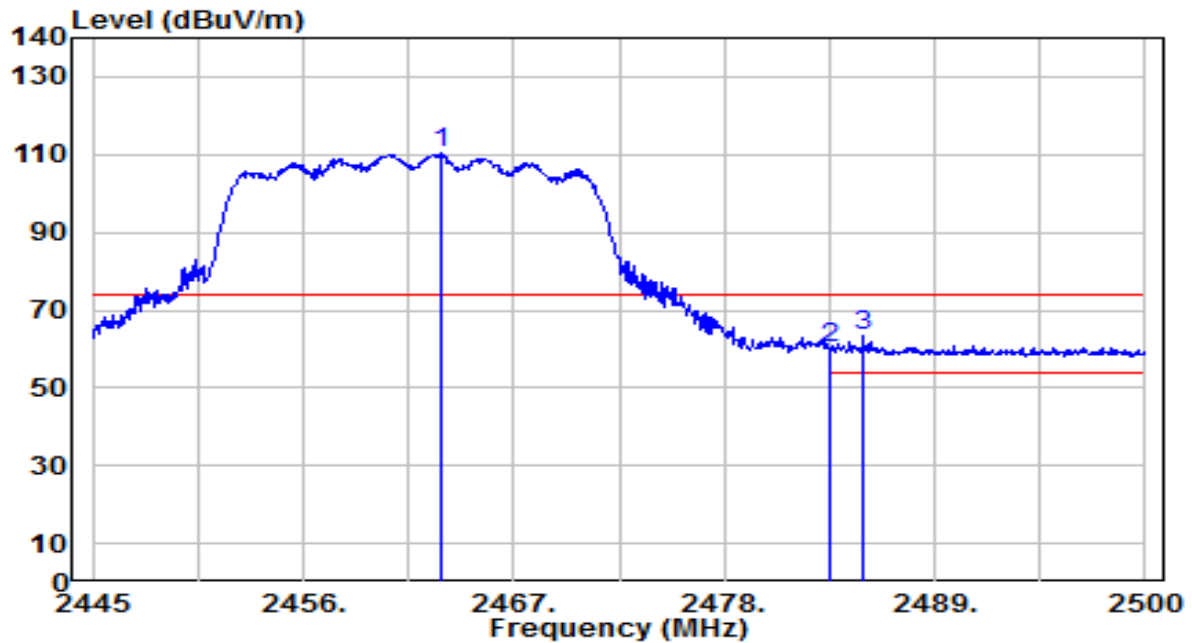


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2463.260        | 78.13          | 32.22      | 110.35               | N/A         | N/A            | 265         | 305         | Peak              |
| 2  | 2483.500        | 28.15          | 32.30      | 60.45                | -13.55      | 74.00          | 265         | 305         | Peak              |
| 3  | * 2485.260      | 30.94          | 32.30      | 63.25                | -10.75      | 74.00          | 265         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

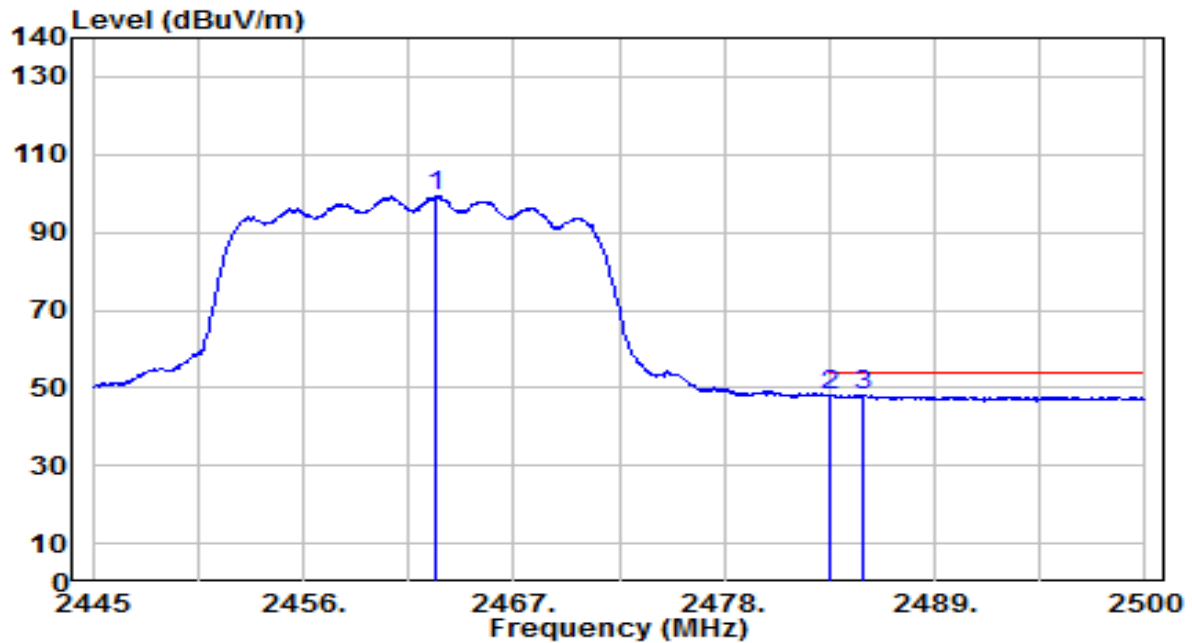


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2462.875        | 67.23          | 32.22      | 99.46                | N/A         | N/A            | 265         | 305         | Average           |
| 2  |   | 2483.500        | 15.59          | 32.30      | 47.88                | -6.12       | 54.00          | 265         | 305         | Average           |
| 3  | * | 2485.260        | 15.84          | 32.30      | 48.14                | -5.86       | 54.00          | 265         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

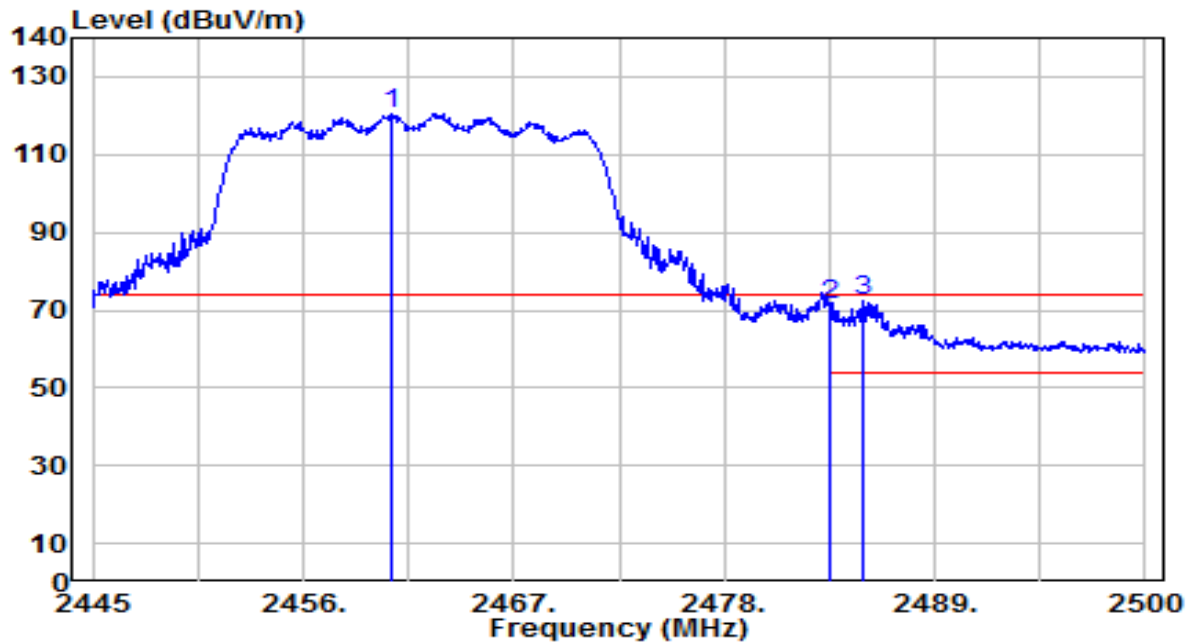


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.620        | 88.28          | 32.21      | 120.49               | N/A         | N/A            | 220         | 90          | Peak              |
| 2  | 2483.500        | 39.25          | 32.30      | 71.54                | -2.46       | 74.00          | 220         | 90          | Peak              |
| 3  | * 2485.205      | 40.25          | 32.30      | 72.56                | -1.44       | 74.00          | 220         | 90          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

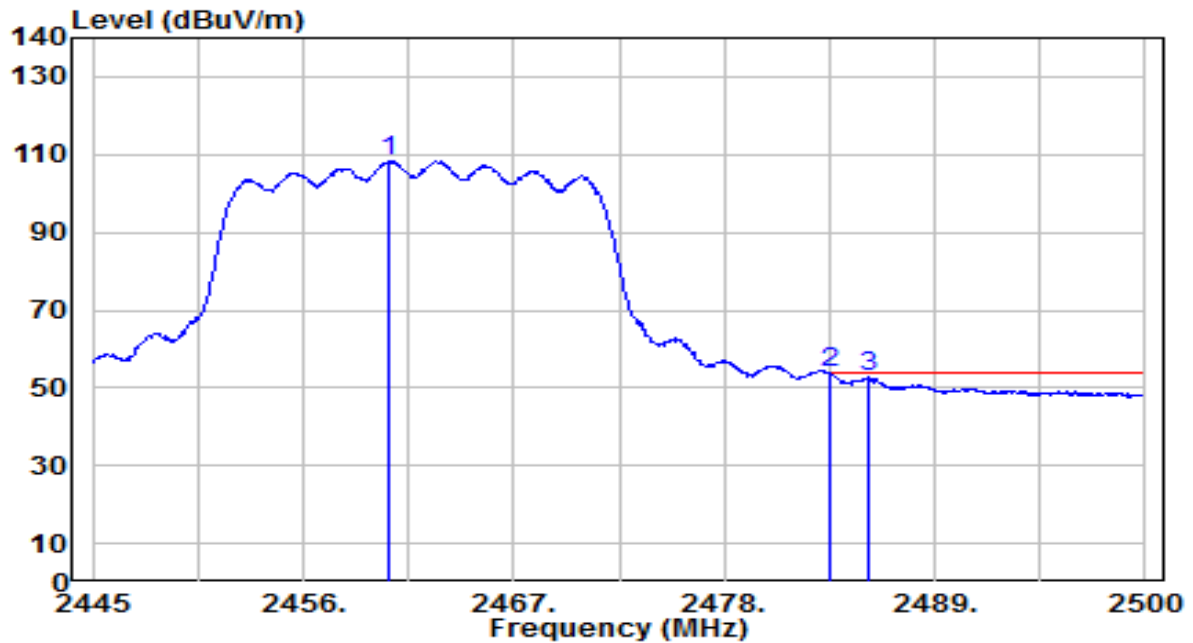


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2460.455        | 76.23          | 32.21      | 108.44               | N/A         | N/A            | 220         | 90          | Average           |
| 2  | * | 2483.500        | 21.48          | 32.30      | 53.78                | -0.22       | 54.00          | 220         | 90          | Average           |
| 3  |   | 2485.535        | 20.48          | 32.31      | 52.78                | -1.22       | 54.00          | 220         | 90          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

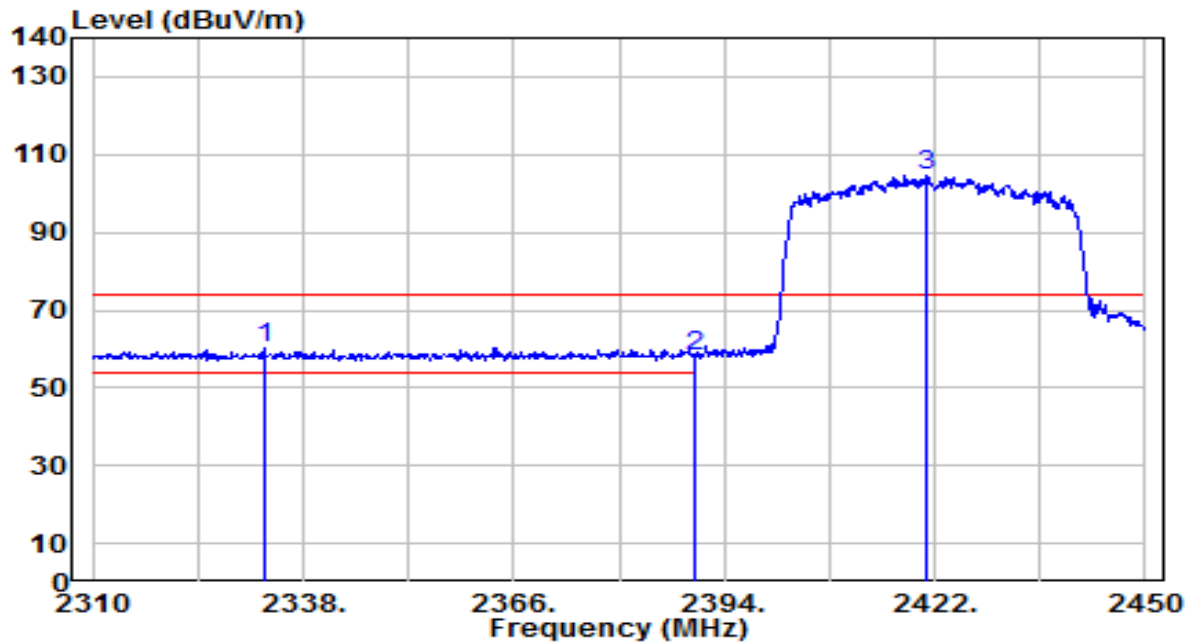


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2332.820        | 28.48          | 31.73      | 60.21                | -13.79      | 74.00          | 130         | 285         | Peak              |
| 2  |   | 2390.000        | 26.31          | 31.95      | 58.26                | -15.74      | 74.00          | 130         | 285         | Peak              |
| 3  |   | 2420.740        | 72.74          | 32.06      | 104.81               | N/A         | N/A            | 130         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

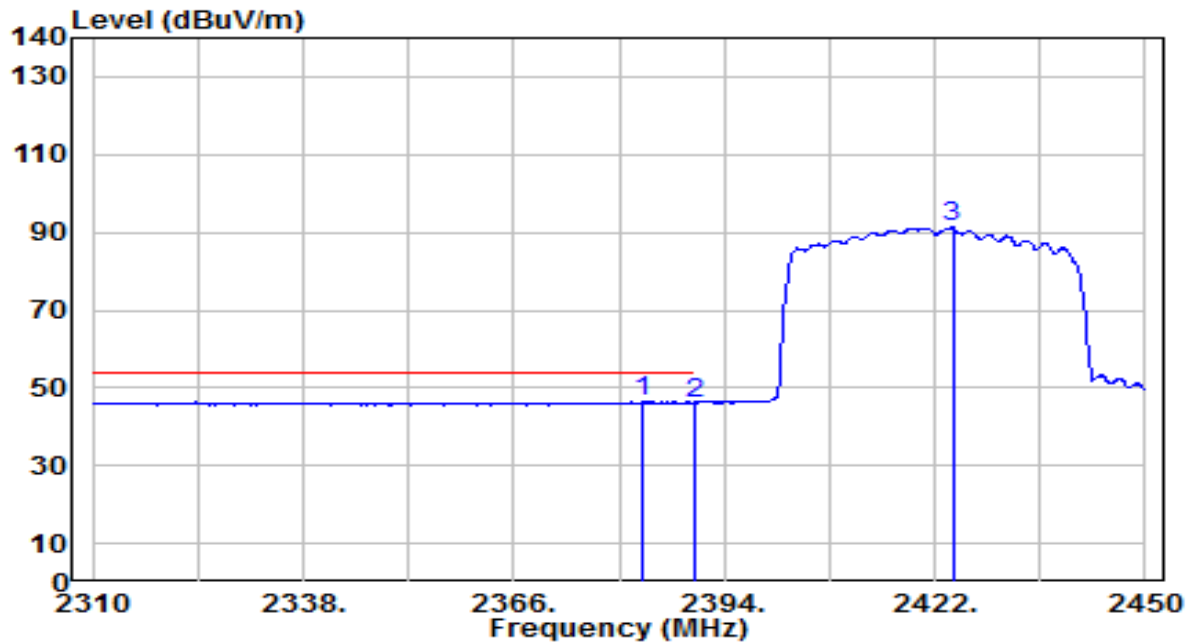


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2383.080        | 14.51          | 31.92      | 46.43                | -7.57       | 54.00          | 130         | 285         | Average           |
| 2  |   | 2390.000        | 14.24          | 31.95      | 46.18                | -7.82       | 54.00          | 130         | 285         | Average           |
| 3  |   | 2424.380        | 59.12          | 32.08      | 91.20                | N/A         | N/A            | 130         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

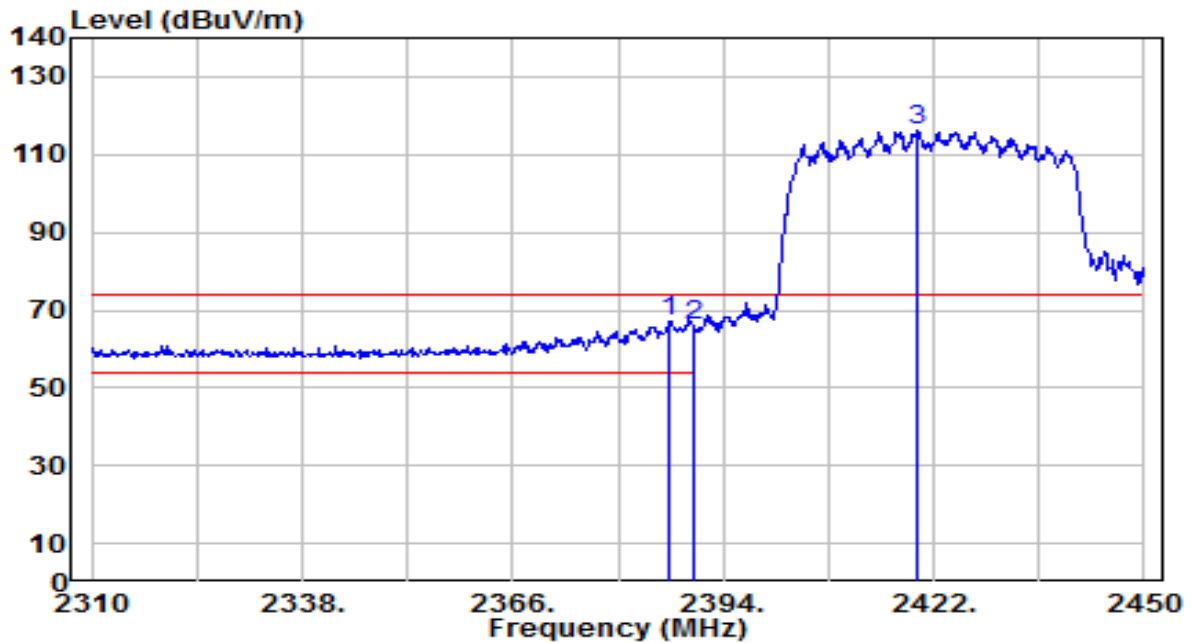


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.860        | 35.11          | 31.94      | 67.05                | -6.95       | 74.00          | 175         | 75          | Peak              |
| 2  |   | 2390.000        | 33.96          | 31.95      | 65.91                | -8.09       | 74.00          | 175         | 75          | Peak              |
| 3  |   | 2419.760        | 83.94          | 32.06      | 116.00               | N/A         | N/A            | 175         | 75          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

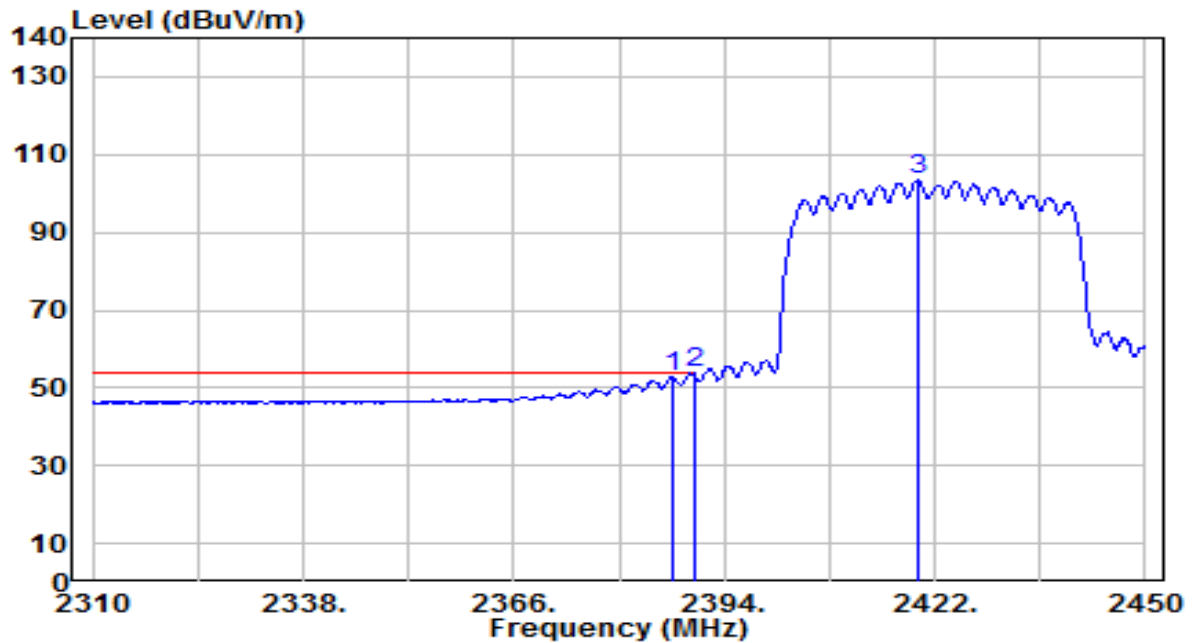


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.140        | 20.92          | 31.94      | 52.86                | -1.14       | 54.00          | 175         | 75          | Average           |
| 2  | * | 2390.000        | 21.75          | 31.95      | 53.70                | -0.30       | 54.00          | 175         | 75          | Average           |
| 3  |   | 2419.900        | 71.39          | 32.06      | 103.45               | N/A         | N/A            | 175         | 75          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

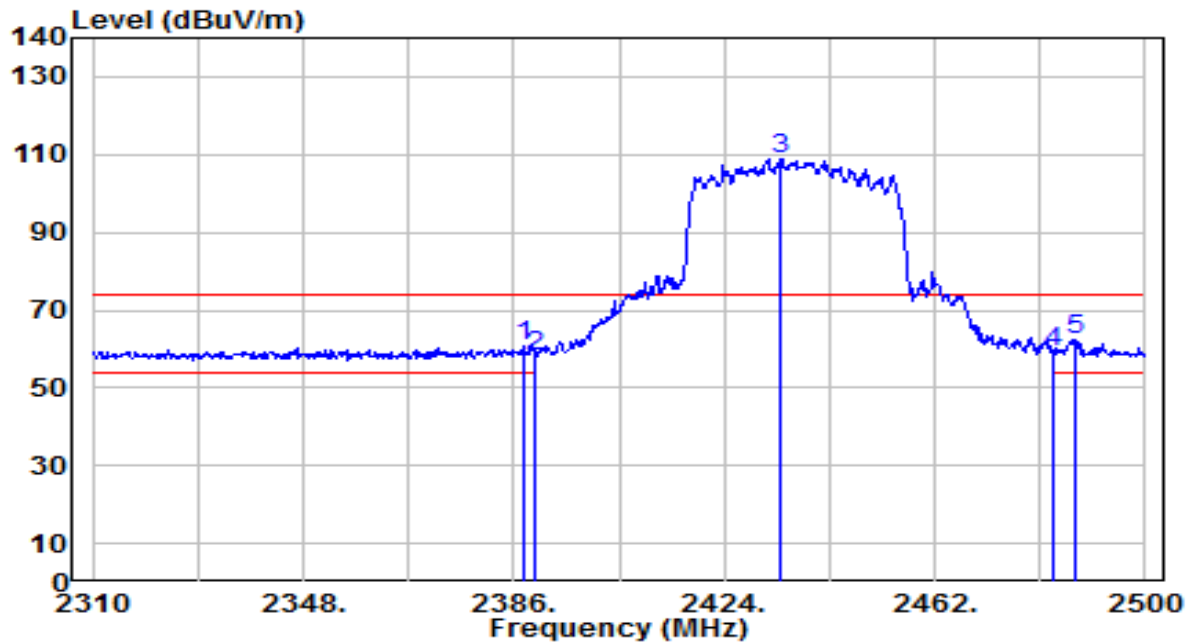


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.710        | 28.56          | 31.94      | 60.50                | -13.50      | 74.00          | 195         | 305         | Peak              |
| 2  |   | 2390.000        | 26.37          | 31.95      | 58.31                | -15.69      | 74.00          | 195         | 305         | Peak              |
| 3  |   | 2434.070        | 76.67          | 32.11      | 108.78               | N/A         | N/A            | 195         | 305         | Peak              |
| 4  |   | 2483.500        | 26.61          | 32.30      | 58.91                | -15.09      | 74.00          | 195         | 305         | Peak              |
| 5  | * | 2487.270        | 30.24          | 32.31      | 62.55                | -11.45      | 74.00          | 195         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

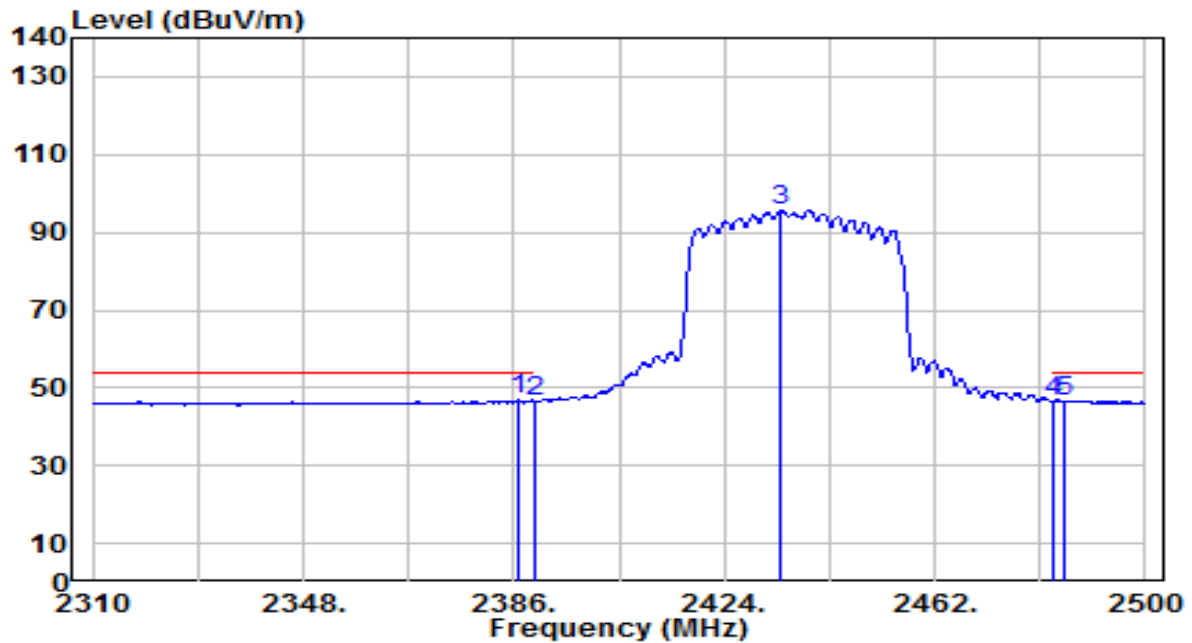


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.760        | 14.97          | 31.94      | 46.91                | -7.09       | 54.00          | 195         | 305         | Average           |
| 2  |   | 2390.000        | 14.73          | 31.95      | 46.68                | -7.32       | 54.00          | 195         | 305         | Average           |
| 3  |   | 2434.260        | 63.76          | 32.11      | 95.87                | N/A         | N/A            | 195         | 305         | Average           |
| 4  |   | 2483.500        | 14.14          | 32.30      | 46.43                | -7.57       | 54.00          | 195         | 305         | Average           |
| 5  |   | 2485.180        | 14.37          | 32.30      | 46.68                | -7.32       | 54.00          | 195         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

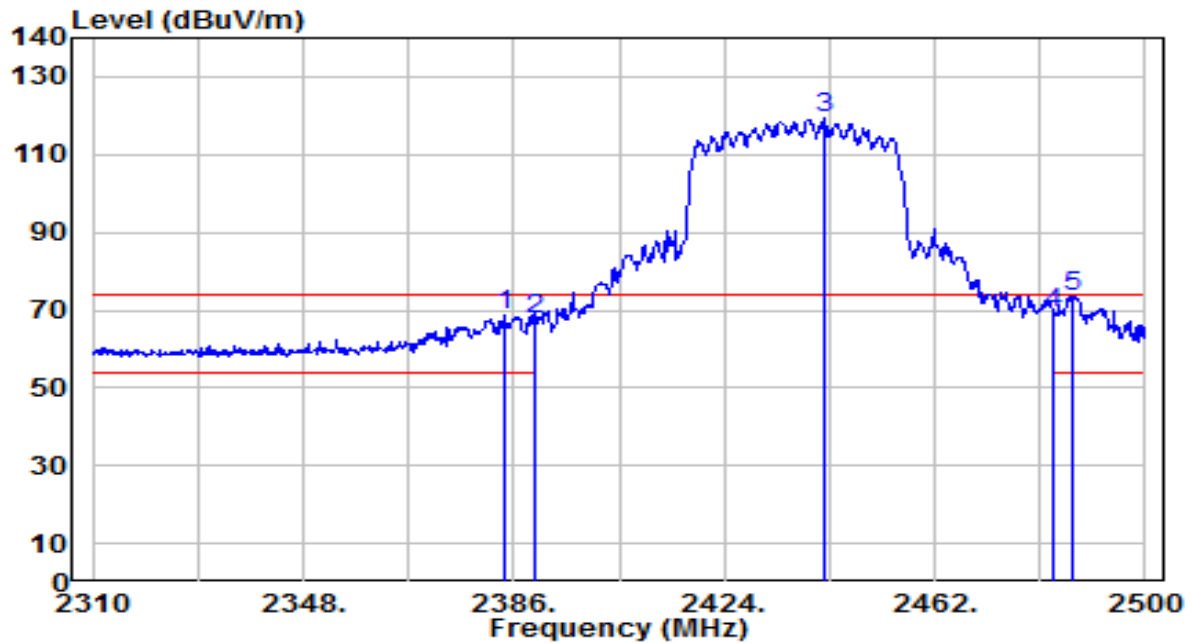


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2384.480        | 36.51          | 31.93      | 68.44                | -5.56       | 74.00          | 170         | 90          | Peak              |
| 2  |   | 2390.000        | 35.69          | 31.95      | 67.64                | -6.36       | 74.00          | 170         | 90          | Peak              |
| 3  |   | 2442.050        | 87.33          | 32.14      | 119.48               | N/A         | N/A            | 170         | 90          | Peak              |
| 4  |   | 2483.500        | 36.70          | 32.30      | 69.00                | -5.00       | 74.00          | 170         | 90          | Peak              |
| 5  | * | 2487.080        | 41.38          | 32.31      | 73.70                | -0.30       | 74.00          | 170         | 90          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

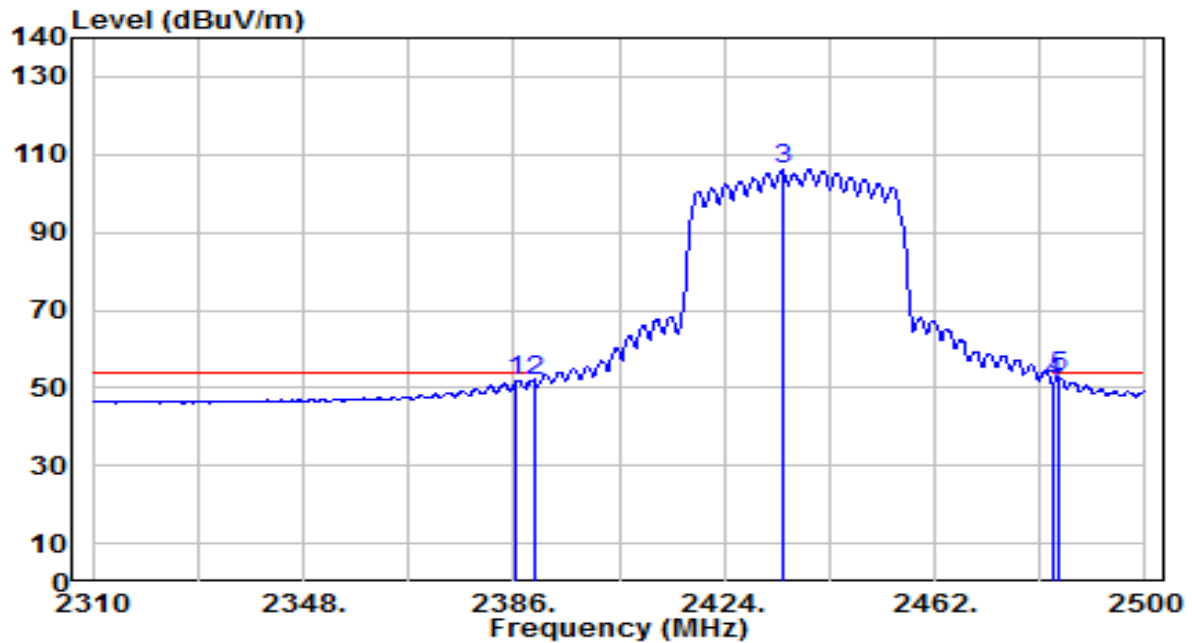


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2386.570        | 19.74          | 31.94      | 51.67                | -2.33       | 54.00          | 170         | 90          | Average           |
| 2  |   | 2390.000        | 19.60          | 31.95      | 51.55                | -2.45       | 54.00          | 170         | 90          | Average           |
| 3  |   | 2434.450        | 74.08          | 32.11      | 106.20               | N/A         | N/A            | 170         | 90          | Average           |
| 4  |   | 2483.500        | 18.85          | 32.30      | 51.15                | -2.85       | 54.00          | 170         | 90          | Average           |
| 5  | * | 2484.610        | 20.29          | 32.30      | 52.59                | -1.41       | 54.00          | 170         | 90          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 8_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

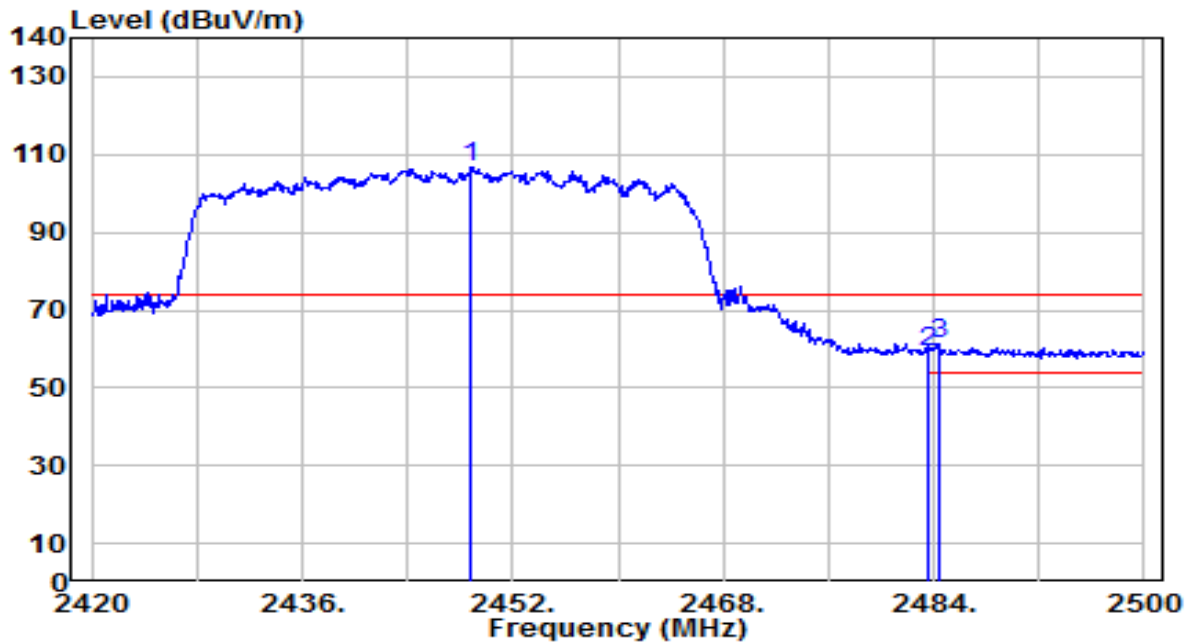


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2448.880        | 74.68          | 32.17      | 106.85               | N/A         | N/A            | 265         | 305         | Peak              |
| 2  | 2483.500        | 26.67          | 32.30      | 58.97                | -15.03      | 74.00          | 265         | 305         | Peak              |
| 3  | * 2484.480      | 29.06          | 32.30      | 61.36                | -12.64      | 74.00          | 265         | 305         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 8_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

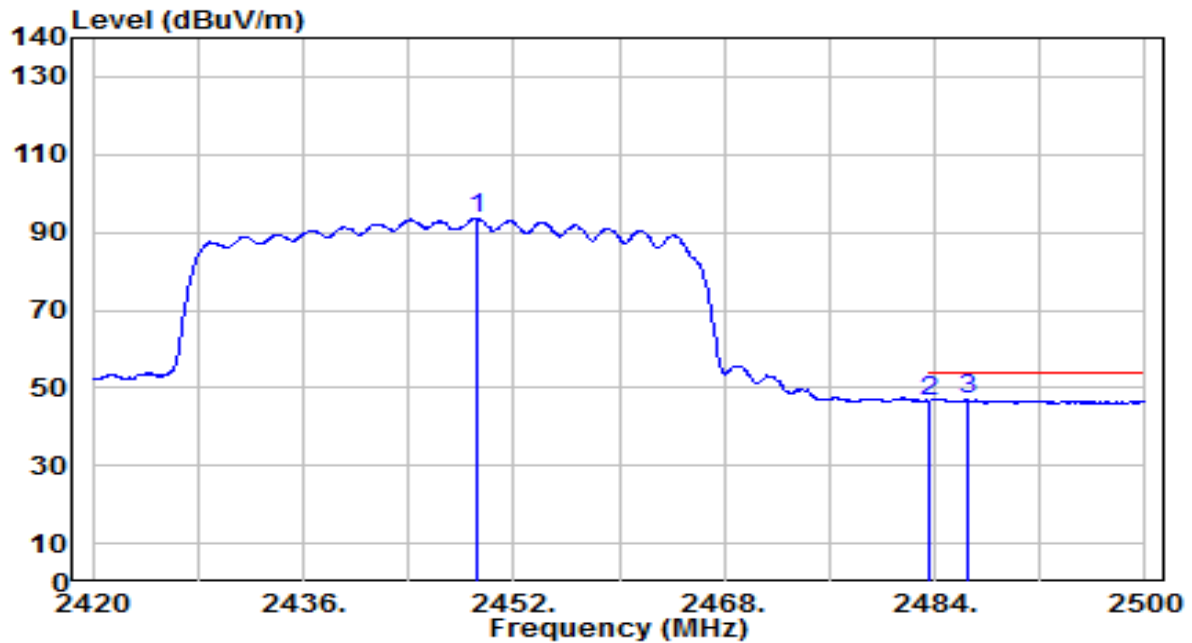


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2449.120        | 61.47          | 32.17      | 93.64                | N/A         | N/A            | 265         | 305         | Average           |
| 2  | 2483.500        | 14.40          | 32.30      | 46.70                | -7.30       | 54.00          | 265         | 305         | Average           |
| 3  | * 2486.480      | 14.71          | 32.31      | 47.02                | -6.98       | 54.00          | 265         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 8_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

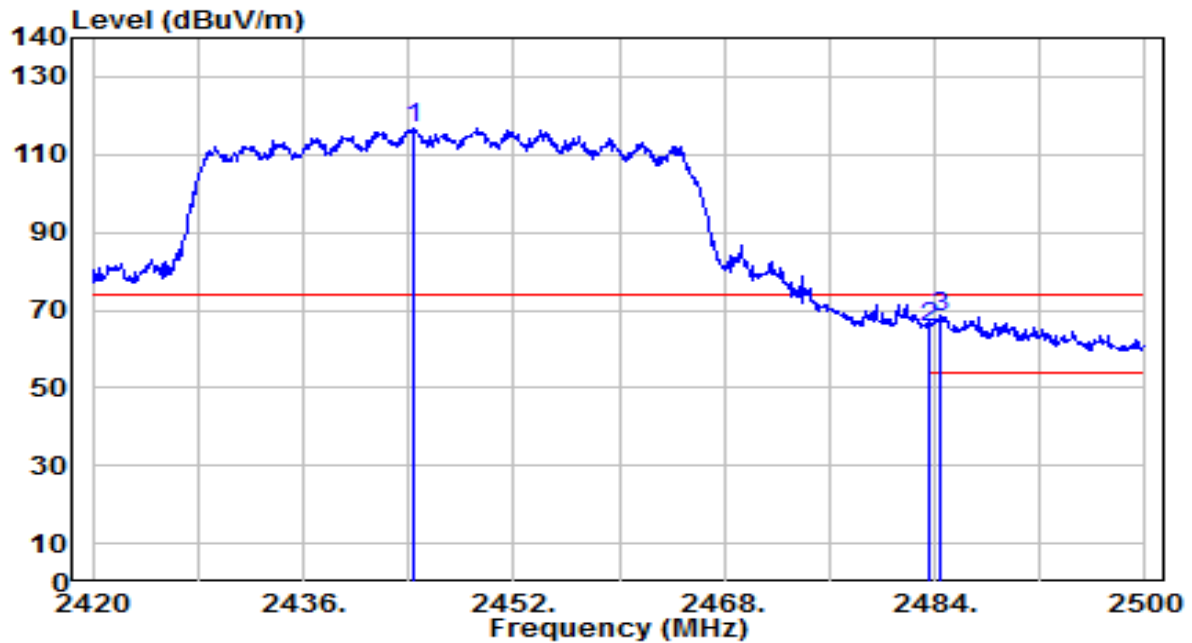


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2444.480        | 84.45          | 32.15      | 116.60               | N/A         | N/A            | 220         | 90          | Peak              |
| 2  | 2483.500        | 33.15          | 32.30      | 65.45                | -8.55       | 74.00          | 220         | 90          | Peak              |
| 3  | * 2484.480      | 36.10          | 32.30      | 68.41                | -5.59       | 74.00          | 220         | 90          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 8_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

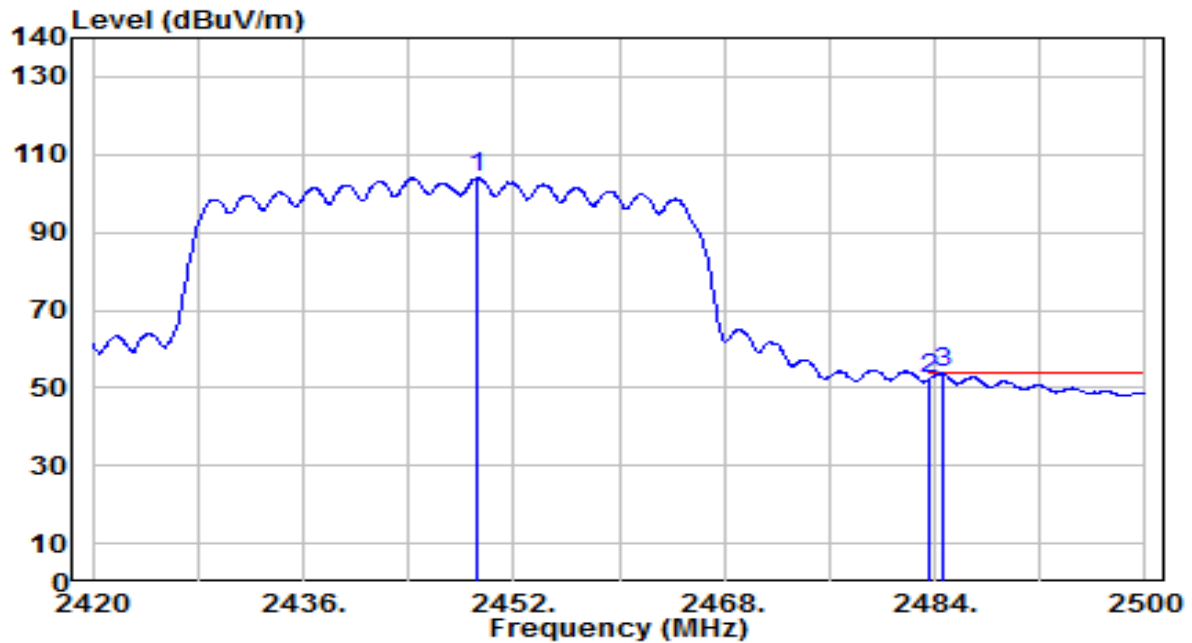


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2449.280        | 71.70          | 32.17      | 103.87               | N/A         | N/A            | 220         | 90          | Average           |
| 2  | 2483.500        | 19.78          | 32.30      | 52.08                | -1.92       | 54.00          | 220         | 90          | Average           |
| 3  | * 2484.560      | 21.41          | 32.30      | 53.71                | -0.29       | 54.00          | 220         | 90          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

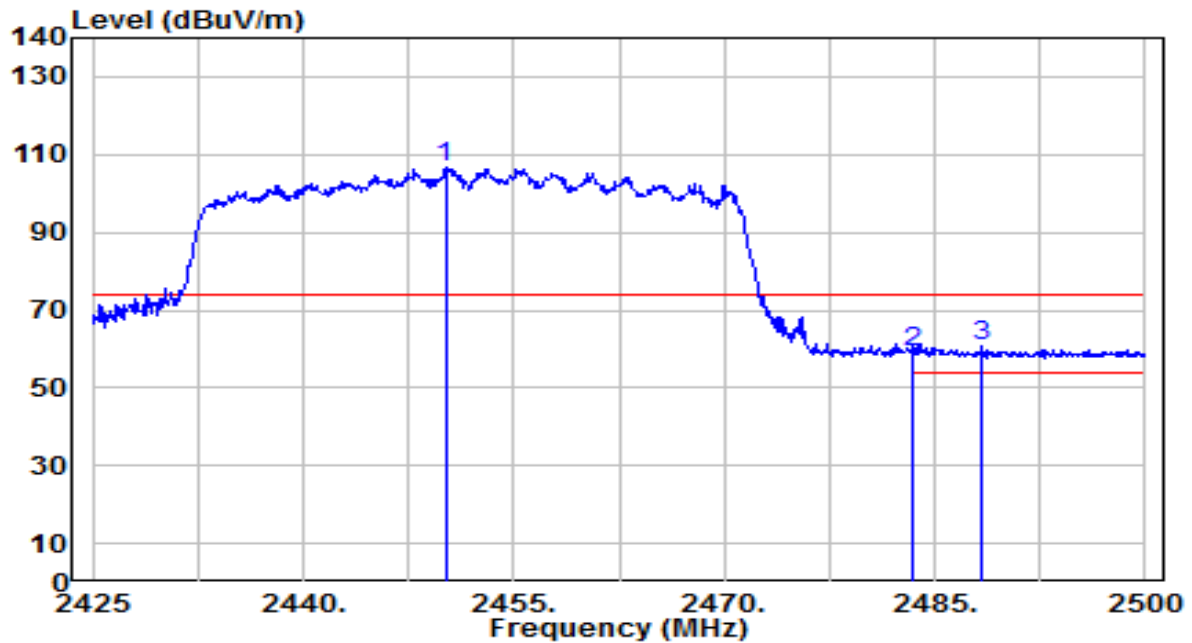


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2450.125        | 74.29          | 32.17      | 106.46               | N/A         | N/A            | 265         | 305         | Peak              |
| 2  | 2483.500        | 26.97          | 32.30      | 59.27                | -14.73      | 74.00          | 265         | 305         | Peak              |
| 3  | * 2488.375      | 28.43          | 32.32      | 60.74                | -13.26      | 74.00          | 265         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

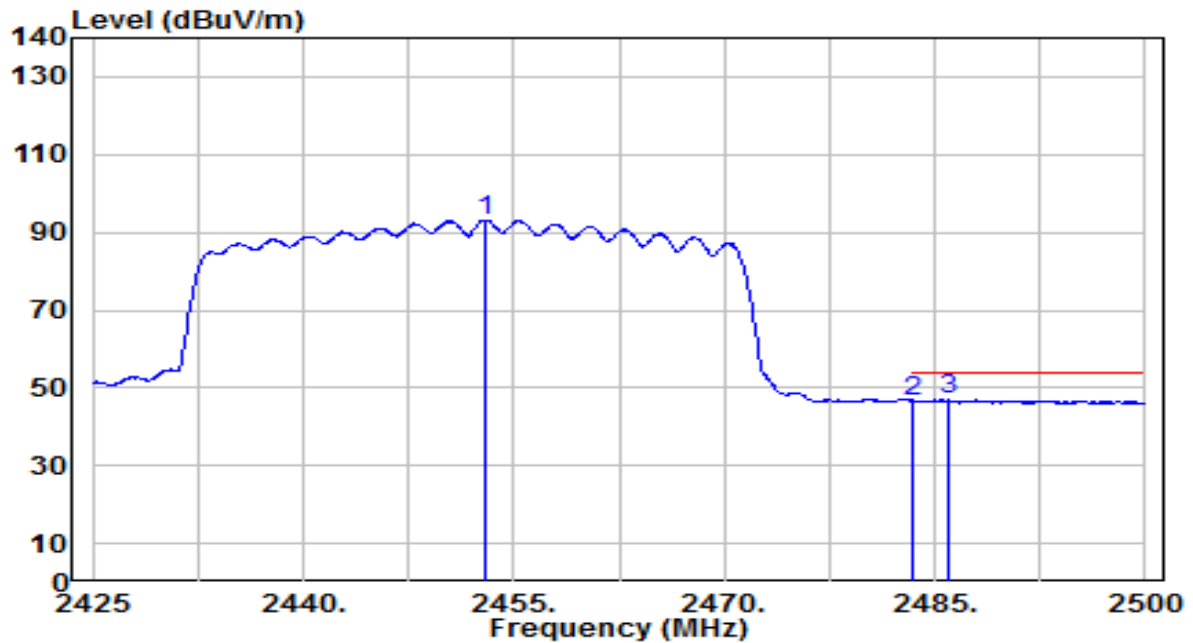


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2452.975        | 60.98          | 32.18      | 93.17                | N/A         | N/A            | 265         | 305         | Average           |
| 2  |   | 2483.500        | 14.22          | 32.30      | 46.52                | -7.48       | 54.00          | 265         | 305         | Average           |
| 3  | * | 2485.900        | 14.65          | 32.31      | 46.95                | -7.05       | 54.00          | 265         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

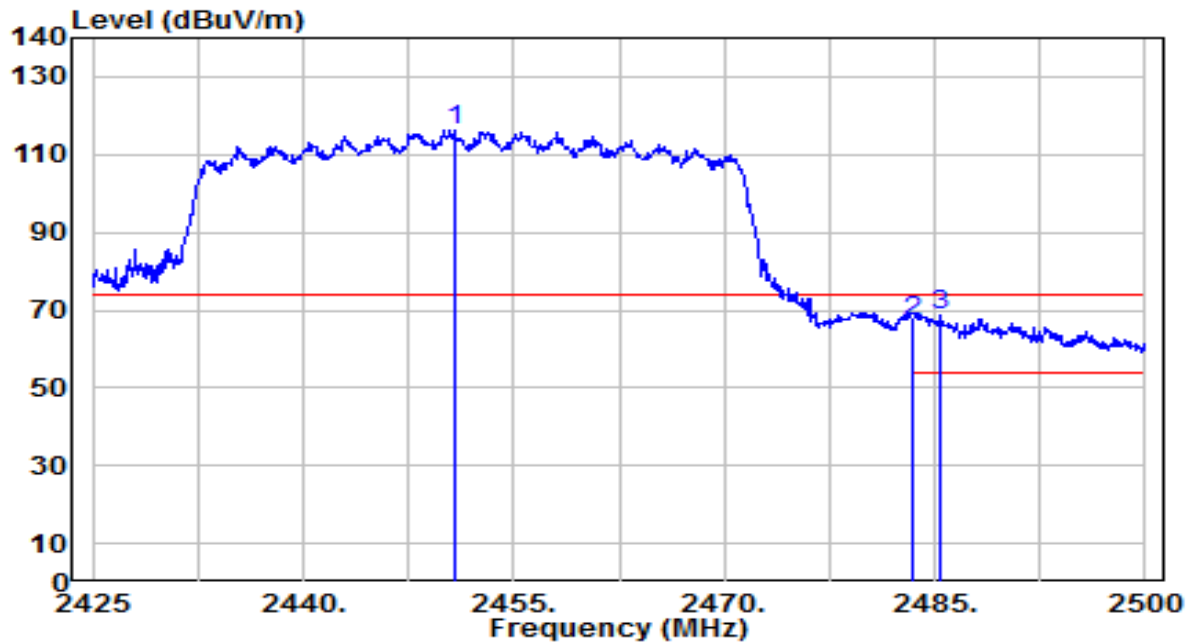


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2450.800        | 84.13          | 32.18      | 116.31               | N/A         | N/A            | 220         | 90          | Peak              |
| 2  | 2483.500        | 35.00          | 32.30      | 67.30                | -6.70       | 74.00          | 220         | 90          | Peak              |
| 3  | * 2485.375      | 36.38          | 32.31      | 68.69                | -5.31       | 74.00          | 220         | 90          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

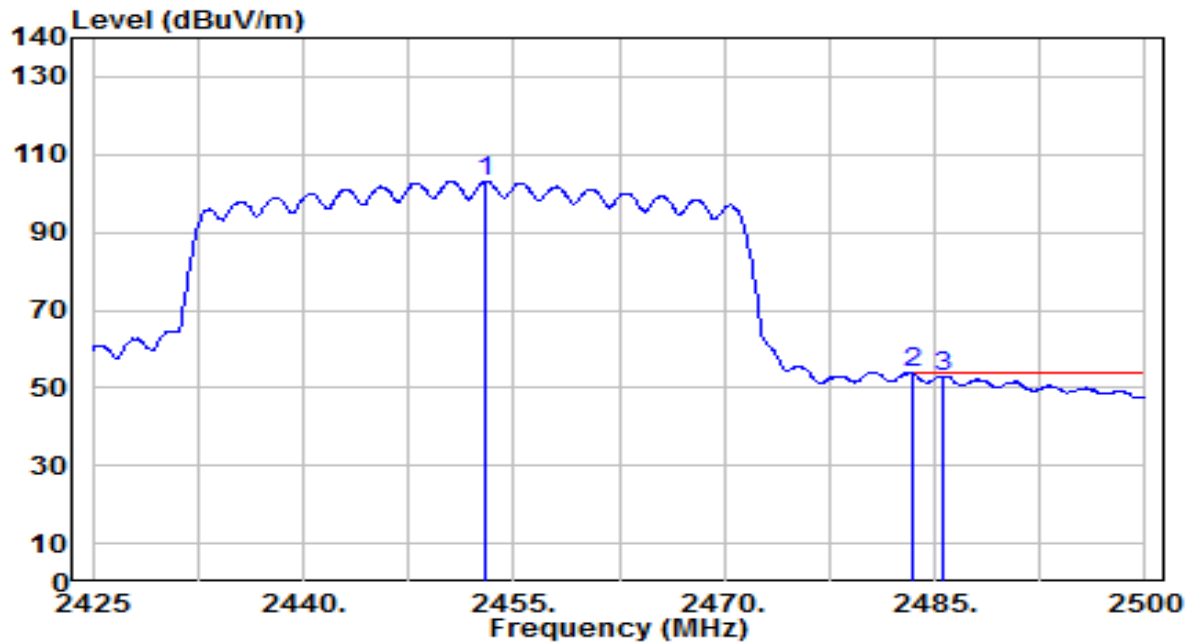


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2453.050        | 70.87          | 32.18      | 103.05               | N/A         | N/A            | 220         | 90          | Average           |
| 2  | * | 2483.500        | 21.41          | 32.30      | 53.70                | -0.30       | 54.00          | 220         | 90          | Average           |
| 3  |   | 2485.675        | 20.77          | 32.31      | 53.08                | -0.92       | 54.00          | 220         | 90          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

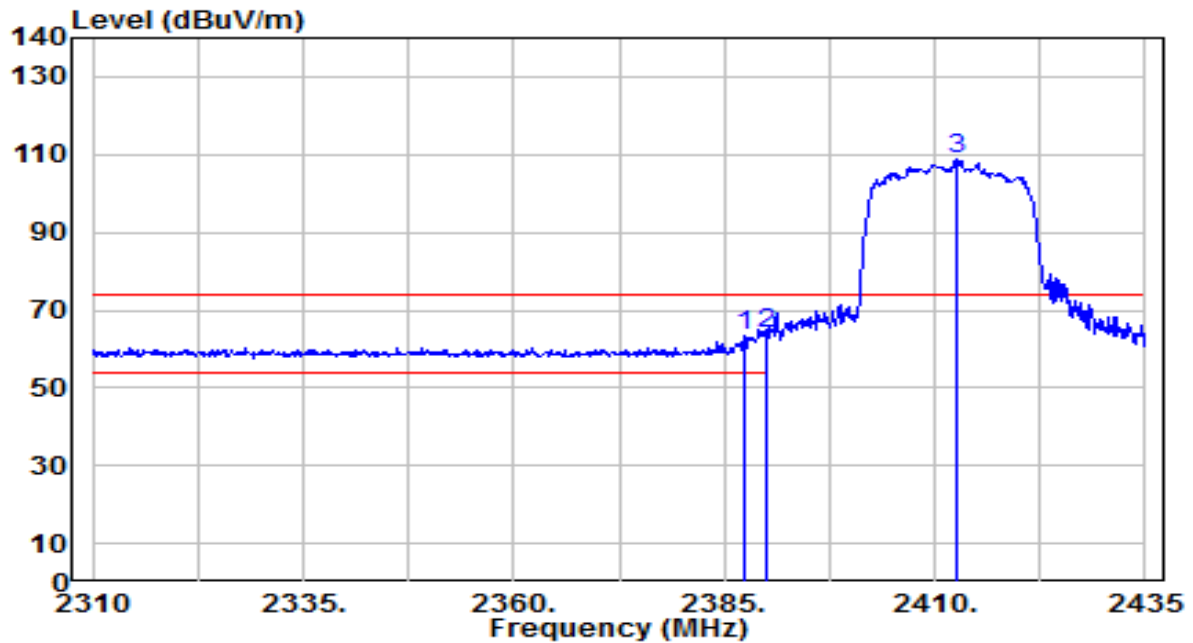


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.250        | 31.20          | 31.94      | 63.14                | -10.86      | 74.00          | 130         | 285         | Peak              |
| 2  | * | 2390.000        | 31.72          | 31.95      | 63.67                | -10.33      | 74.00          | 130         | 285         | Peak              |
| 3  |   | 2412.750        | 76.90          | 32.03      | 108.93               | N/A         | N/A            | 130         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

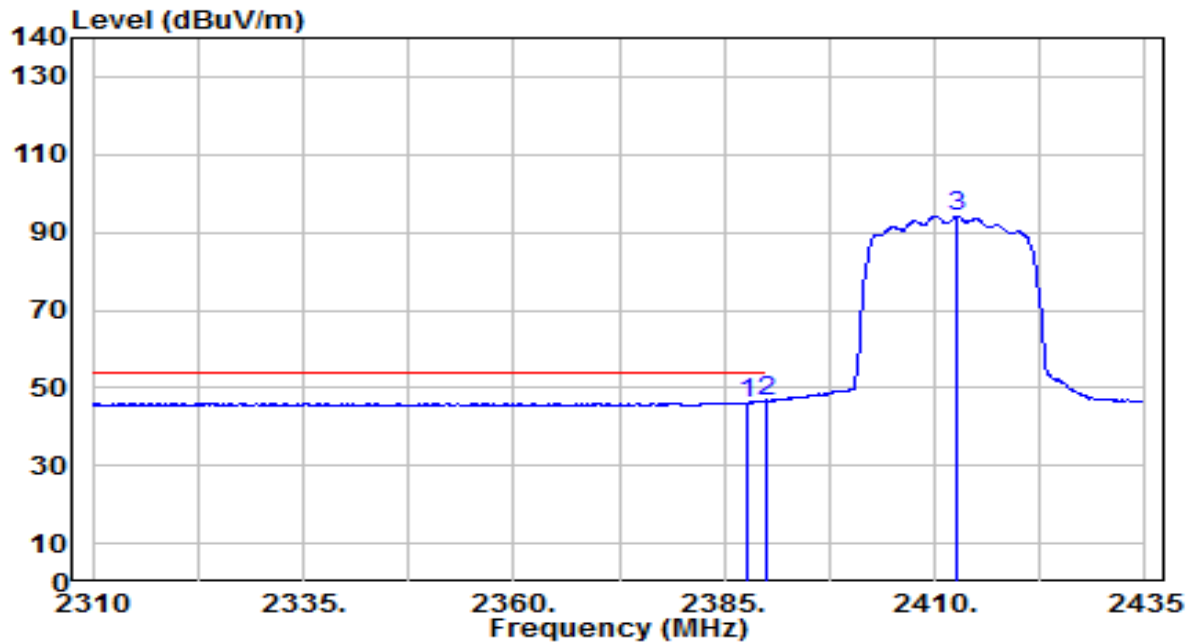


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.875        | 14.19          | 31.94      | 46.13                | -7.87       | 54.00          | 130         | 285         | Average           |
| 2  | * | 2390.000        | 14.60          | 31.95      | 46.55                | -7.45       | 54.00          | 130         | 285         | Average           |
| 3  |   | 2412.500        | 62.17          | 32.03      | 94.20                | N/A         | N/A            | 130         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

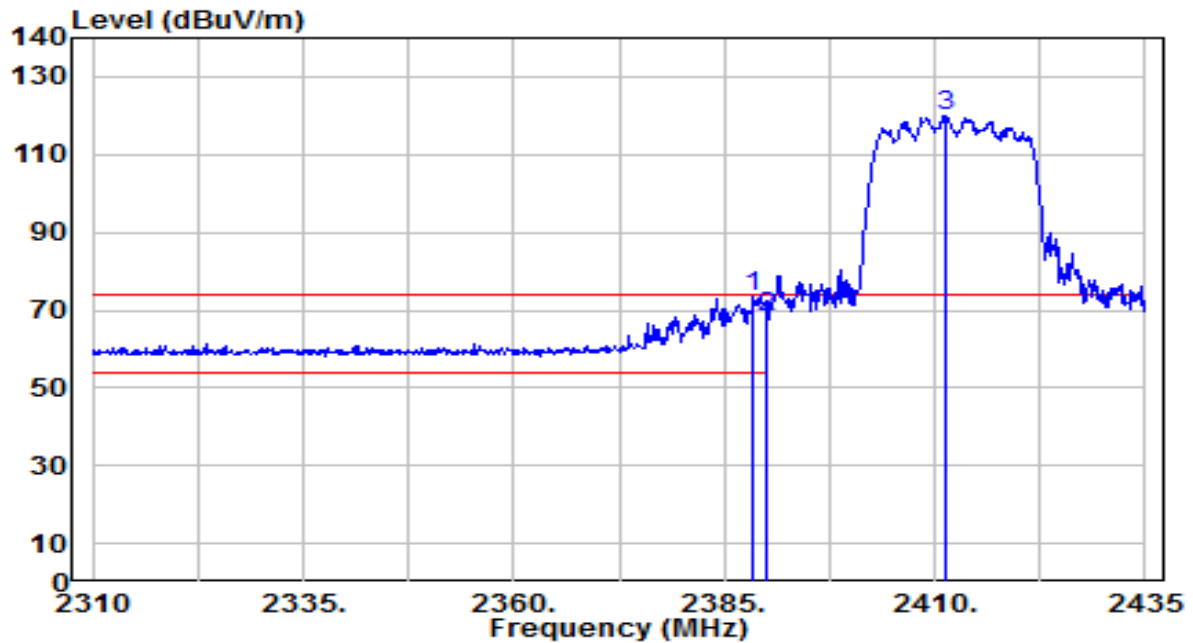


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.375        | 41.75          | 31.94      | 73.70                | -0.30       | 74.00          | 158         | 44          | Peak              |
| 2  |   | 2390.000        | 36.33          | 31.95      | 68.28                | -5.72       | 74.00          | 160         | 45          | Peak              |
| 3  |   | 2411.375        | 88.08          | 32.03      | 120.11               | N/A         | N/A            | 160         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 1_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

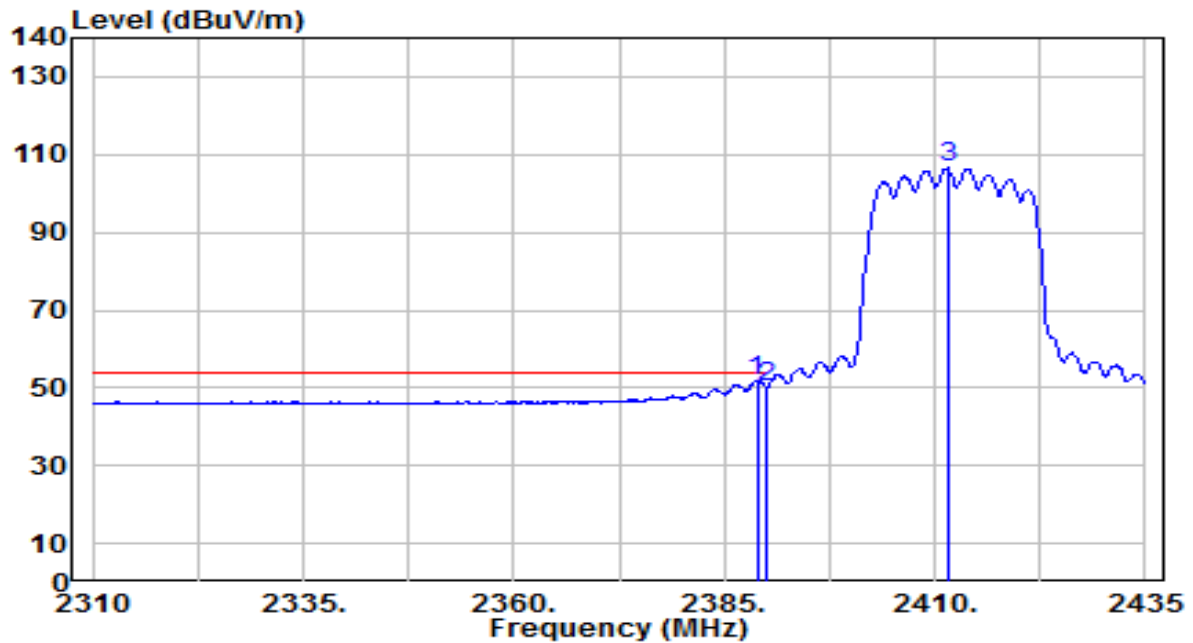


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.875        | 20.01          | 31.94      | 51.95                | -2.05       | 54.00          | 160         | 45          | Average           |
| 2  |   | 2390.000        | 18.09          | 31.95      | 50.04                | -3.96       | 54.00          | 160         | 45          | Average           |
| 3  |   | 2411.500        | 74.46          | 32.03      | 106.49               | N/A         | N/A            | 160         | 45          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

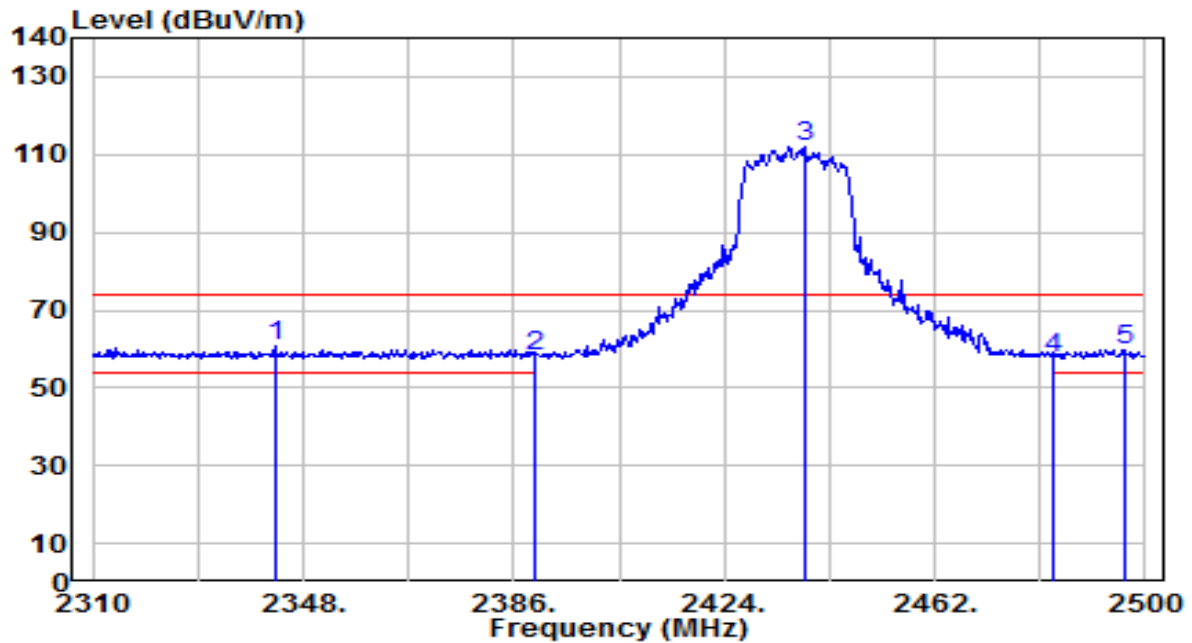


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2342.870        | 29.15          | 31.77      | 60.92                | -13.08      | 74.00          | 195         | 305         | Peak              |
| 2  |   | 2390.000        | 25.95          | 31.95      | 57.90                | -16.10      | 74.00          | 195         | 305         | Peak              |
| 3  |   | 2438.630        | 80.01          | 32.13      | 112.14               | N/A         | N/A            | 195         | 305         | Peak              |
| 4  |   | 2483.500        | 25.48          | 32.30      | 57.78                | -16.22      | 74.00          | 195         | 305         | Peak              |
| 5  |   | 2496.200        | 27.56          | 32.35      | 59.91                | -14.09      | 74.00          | 195         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

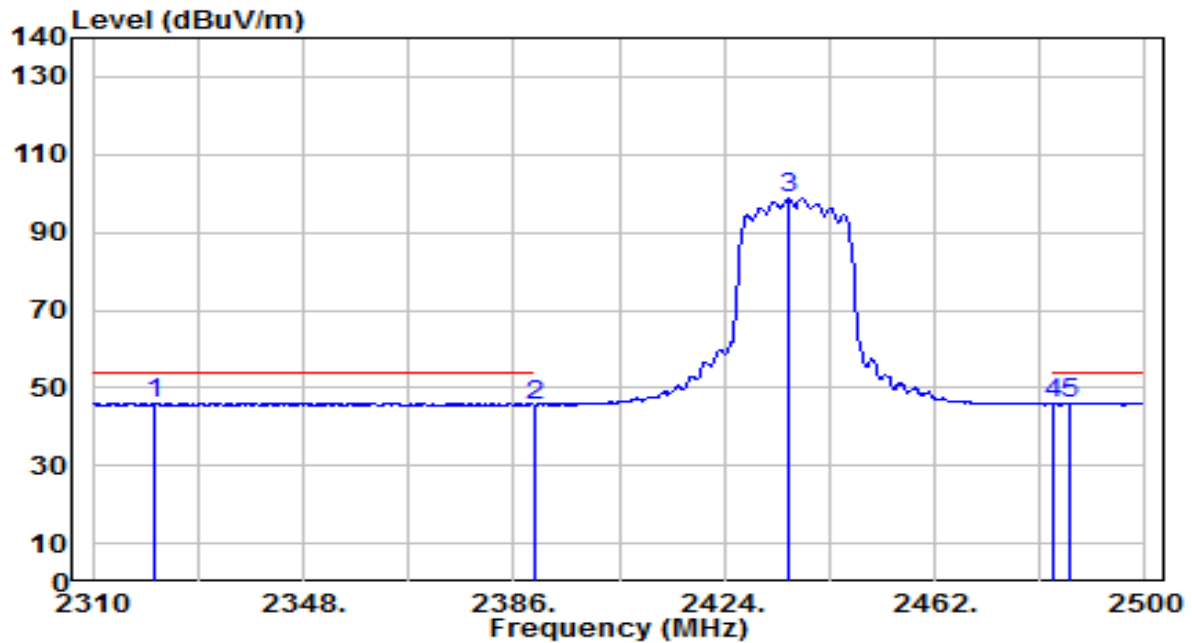


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2321.210        | 14.24          | 31.69      | 45.94                | -8.06       | 54.00          | 195         | 305         | Average           |
| 2  |   | 2390.000        | 13.68          | 31.95      | 45.63                | -8.37       | 54.00          | 195         | 305         | Average           |
| 3  |   | 2435.590        | 66.59          | 32.12      | 98.71                | N/A         | N/A            | 195         | 305         | Average           |
| 4  |   | 2483.500        | 13.51          | 32.30      | 45.81                | -8.19       | 54.00          | 195         | 305         | Average           |
| 5  | * | 2486.320        | 13.67          | 32.31      | 45.98                | -8.02       | 54.00          | 195         | 305         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

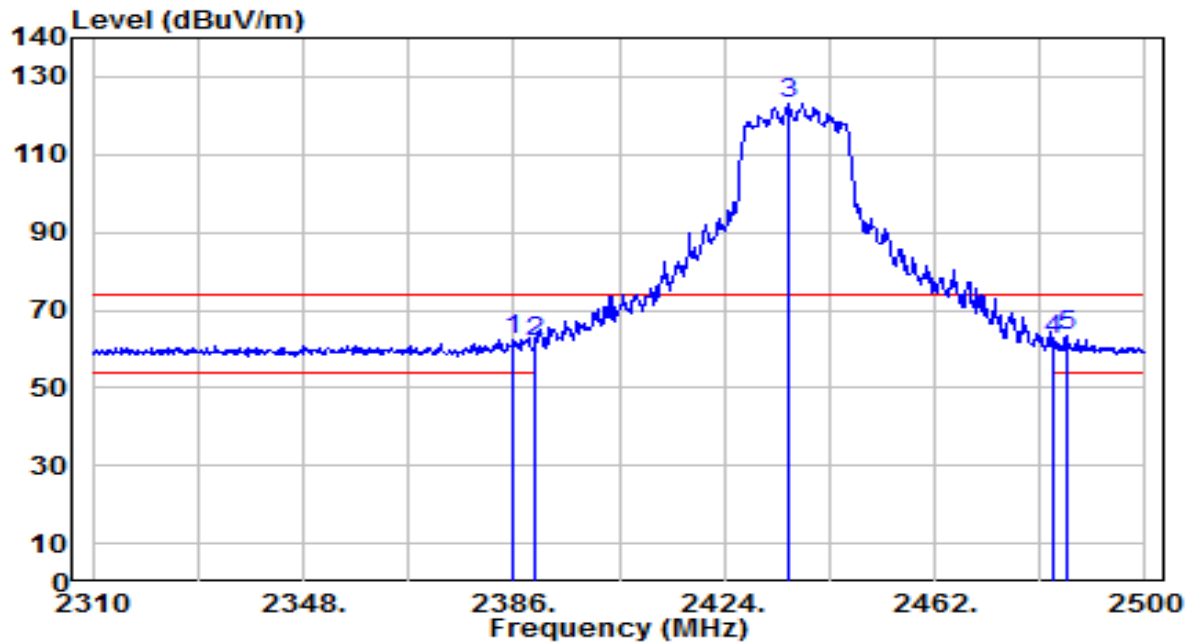


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2385.810        | 30.66          | 31.93      | 62.60                | -11.40      | 74.00          | 195         | 90          | Peak              |
| 2  |   | 2390.000        | 29.97          | 31.95      | 61.92                | -12.08      | 74.00          | 195         | 90          | Peak              |
| 3  |   | 2435.400        | 90.82          | 32.12      | 122.94               | N/A         | N/A            | 195         | 90          | Peak              |
| 4  |   | 2483.500        | 29.92          | 32.30      | 62.22                | -11.78      | 74.00          | 195         | 90          | Peak              |
| 5  | * | 2485.750        | 31.17          | 32.31      | 63.48                | -10.52      | 74.00          | 195         | 90          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

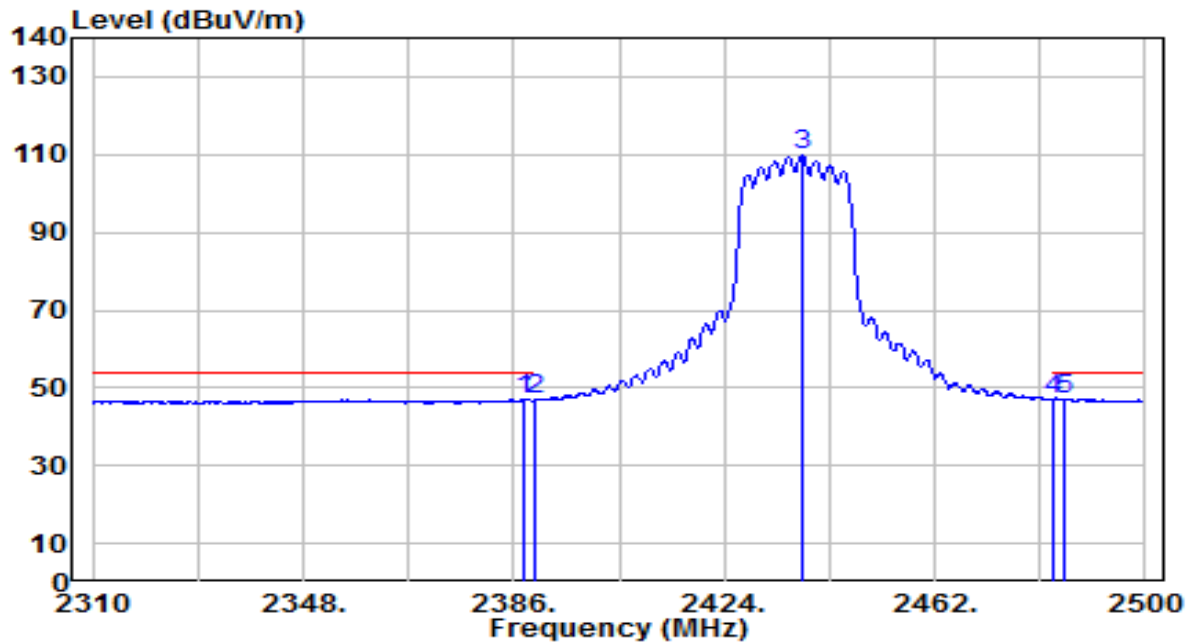


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.900        | 14.98          | 31.94      | 46.93                | -7.07       | 54.00          | 195         | 90          | Average           |
| 2  |   | 2390.000        | 15.09          | 31.95      | 47.04                | -6.96       | 54.00          | 195         | 90          | Average           |
| 3  |   | 2438.060        | 77.63          | 32.13      | 109.76               | N/A         | N/A            | 195         | 90          | Average           |
| 4  | * | 2483.500        | 14.83          | 32.30      | 47.13                | -6.87       | 54.00          | 195         | 90          | Average           |
| 5  |   | 2485.560        | 14.78          | 32.31      | 47.09                | -6.91       | 54.00          | 195         | 90          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

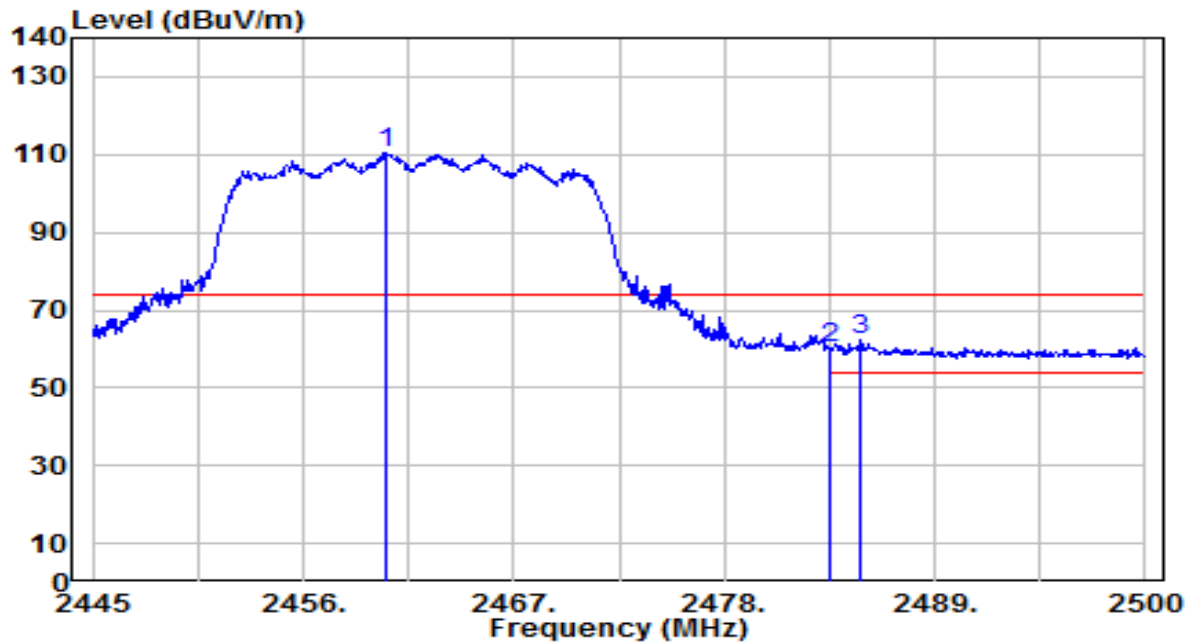


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.345        | 78.42          | 32.21      | 110.63               | N/A         | N/A            | 265         | 305         | Peak              |
| 2  | 2483.500        | 27.96          | 32.30      | 60.26                | -13.74      | 74.00          | 265         | 305         | Peak              |
| 3  | * 2485.150      | 29.93          | 32.30      | 62.23                | -11.77      | 74.00          | 265         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

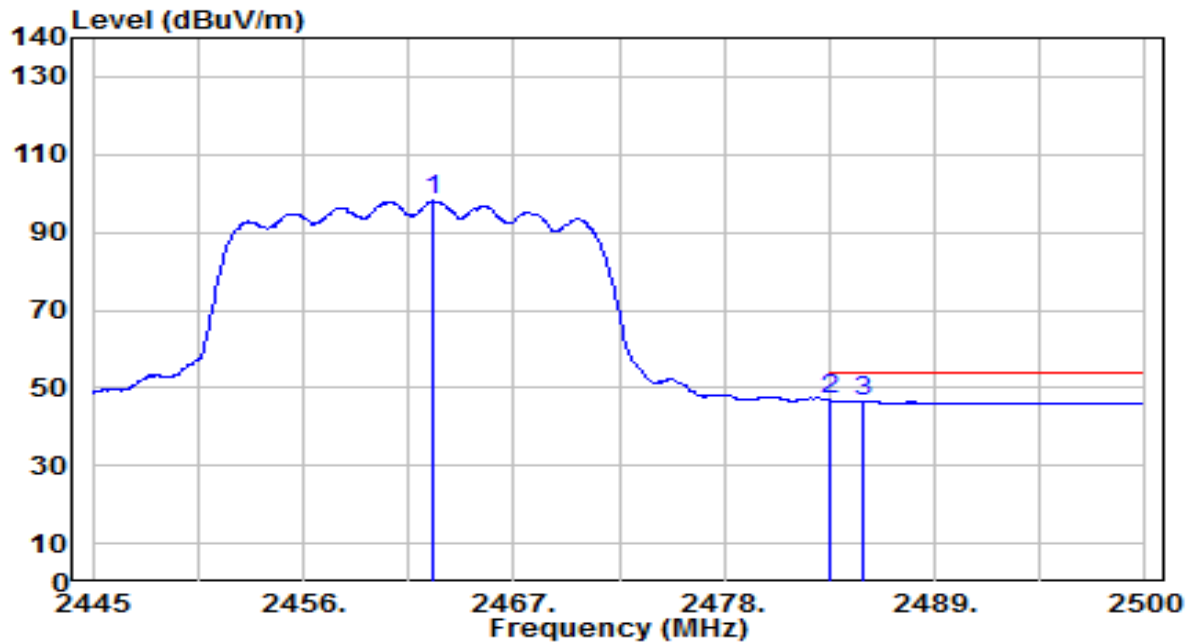


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2462.765        | 65.79          | 32.22      | 98.01                | N/A         | N/A            | 265         | 305         | Average           |
| 2  | * | 2483.500        | 14.51          | 32.30      | 46.81                | -7.19       | 54.00          | 265         | 305         | Average           |
| 3  |   | 2485.205        | 14.36          | 32.30      | 46.66                | -7.34       | 54.00          | 265         | 305         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

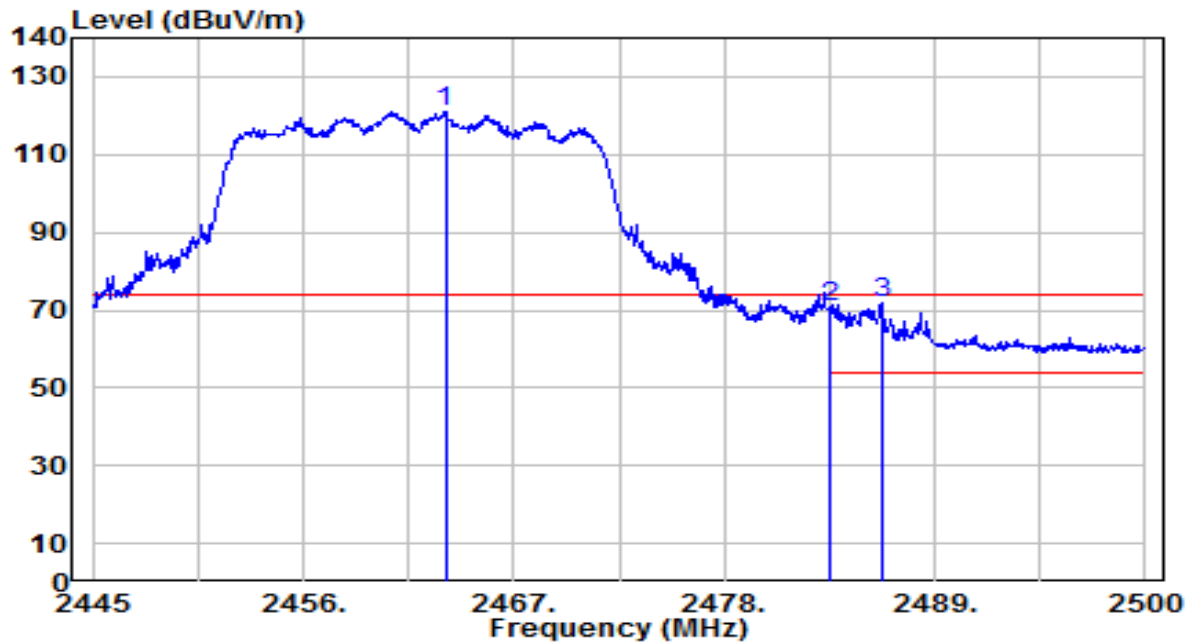


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2463.425        | 88.68          | 32.22      | 120.90               | N/A         | N/A            | 220         | 85          | Peak              |
| 2  | 2483.500        | 38.67          | 32.30      | 70.97                | -3.03       | 74.00          | 220         | 85          | Peak              |
| 3  | * 2486.195      | 39.73          | 32.31      | 72.04                | -1.96       | 74.00          | 220         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-20MHz_TX_CH 11_ANT 0+1        | Test Voltage         | AC 120V/60Hz |

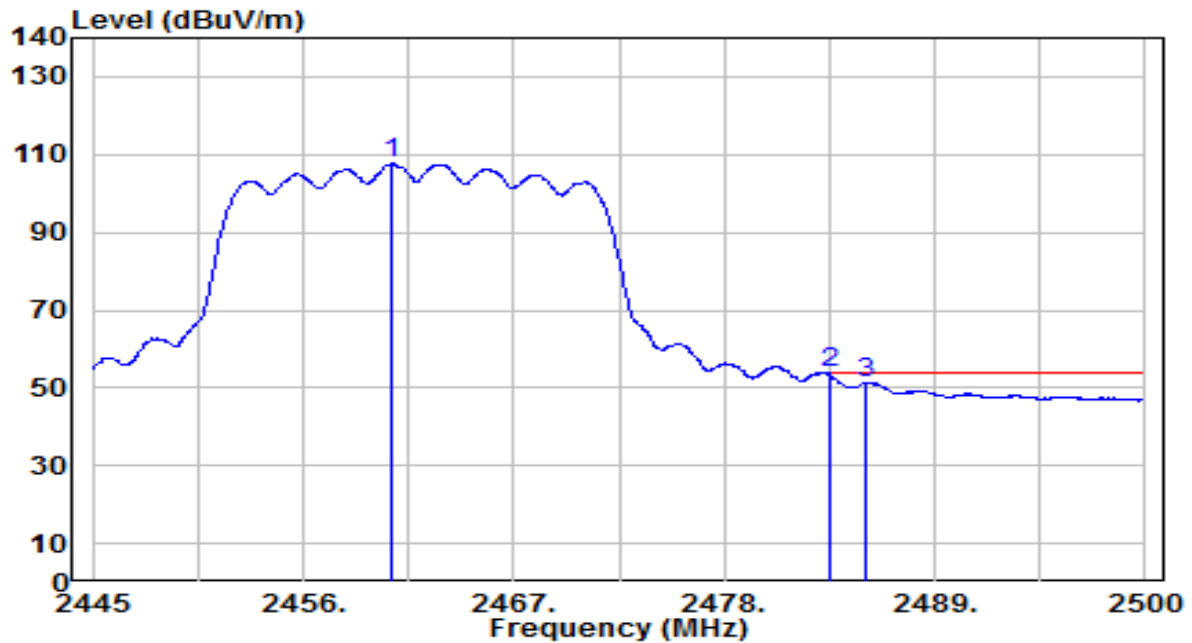


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2460.675        | 75.51          | 32.21      | 107.73               | N/A         | N/A            | 220         | 85          | Average           |
| 2  | * | 2483.500        | 21.43          | 32.30      | 53.73                | -0.27       | 54.00          | 220         | 85          | Average           |
| 3  |   | 2485.370        | 19.12          | 32.31      | 51.42                | -2.58       | 54.00          | 220         | 85          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

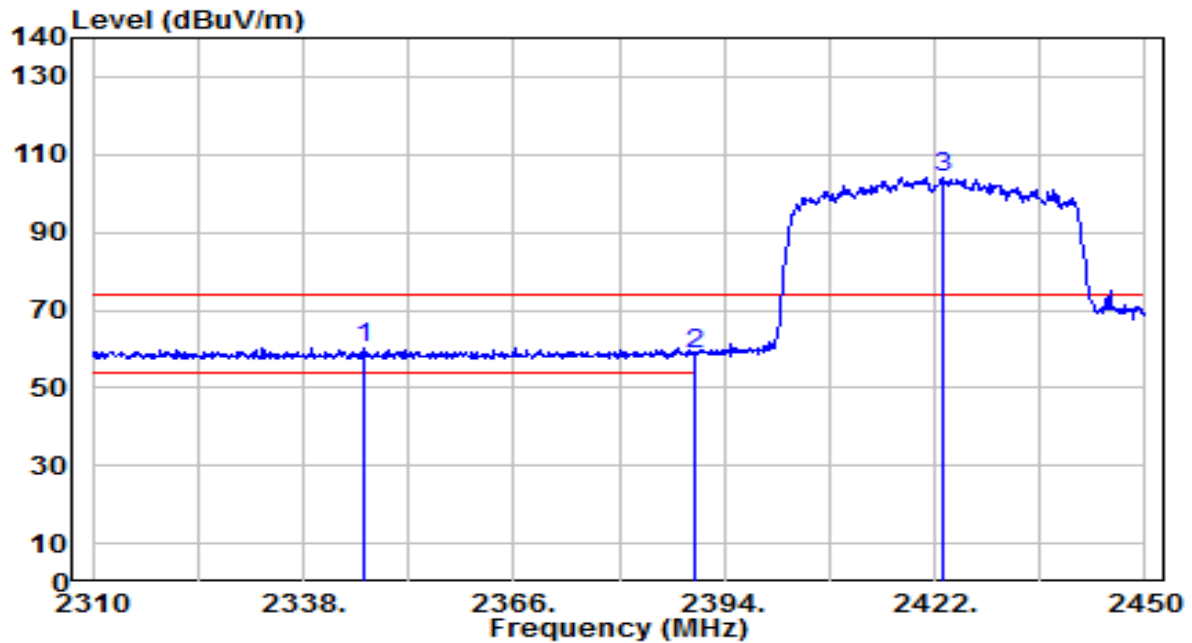


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2346.120        | 28.46          | 31.78      | 60.24                | -13.76      | 74.00          | 130         | 285         | Peak              |
| 2  |   | 2390.000        | 26.45          | 31.95      | 58.40                | -15.60      | 74.00          | 130         | 285         | Peak              |
| 3  |   | 2423.120        | 72.22          | 32.07      | 104.30               | N/A         | N/A            | 130         | 285         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

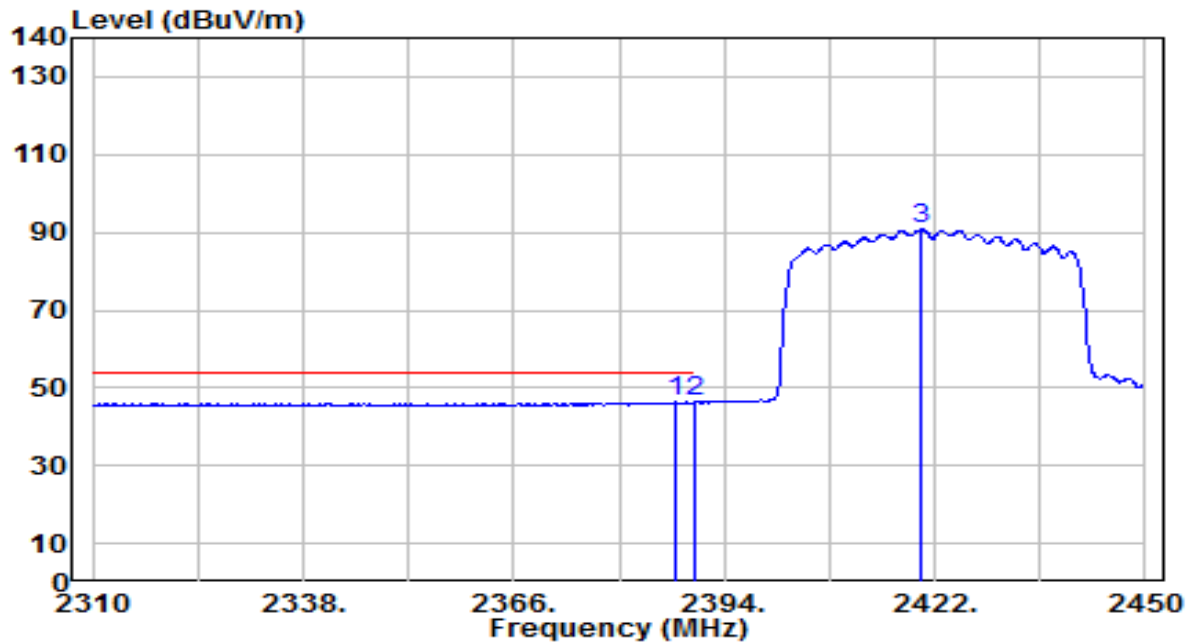


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2387.700        | 14.36          | 31.94      | 46.30                | -7.70       | 54.00          | 130         | 285         | Average           |
| 2  |   | 2390.000        | 14.31          | 31.95      | 46.26                | -7.74       | 54.00          | 130         | 285         | Average           |
| 3  |   | 2420.180        | 58.72          | 32.06      | 90.78                | N/A         | N/A            | 130         | 285         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

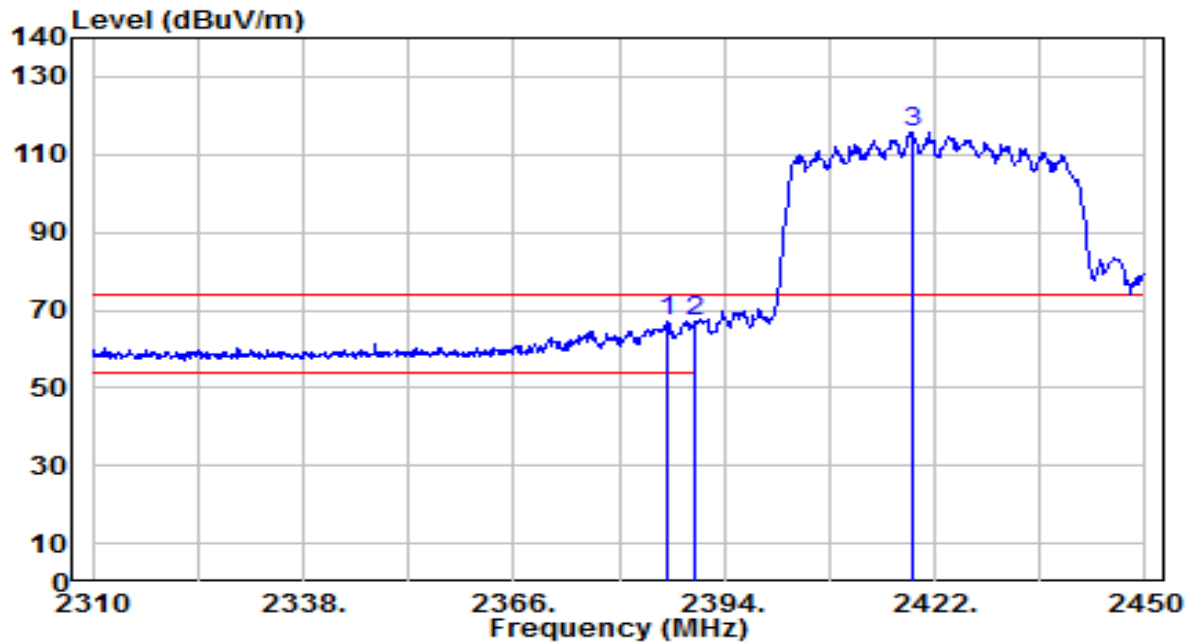


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2386.440        | 35.19          | 31.94      | 67.12                | -6.88       | 74.00          | 160         | 45          | Peak              |
| 2  |   | 2390.000        | 35.00          | 31.95      | 66.95                | -7.05       | 74.00          | 160         | 45          | Peak              |
| 3  |   | 2418.920        | 83.50          | 32.06      | 115.55               | N/A         | N/A            | 160         | 45          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 3_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

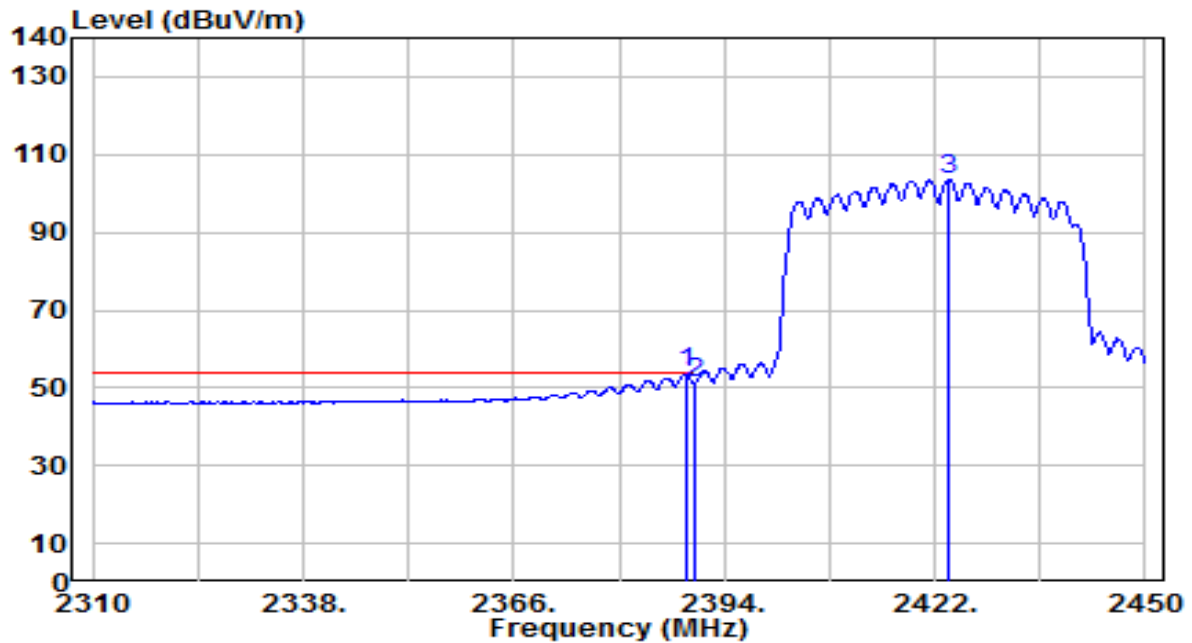


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2388.820        | 21.78          | 31.94      | 53.72                | -0.28       | 54.00          | 160         | 45          | Average           |
| 2  |   | 2390.000        | 19.05          | 31.95      | 51.00                | -3.00       | 54.00          | 160         | 45          | Average           |
| 3  |   | 2423.820        | 71.44          | 32.08      | 103.52               | N/A         | N/A            | 160         | 45          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

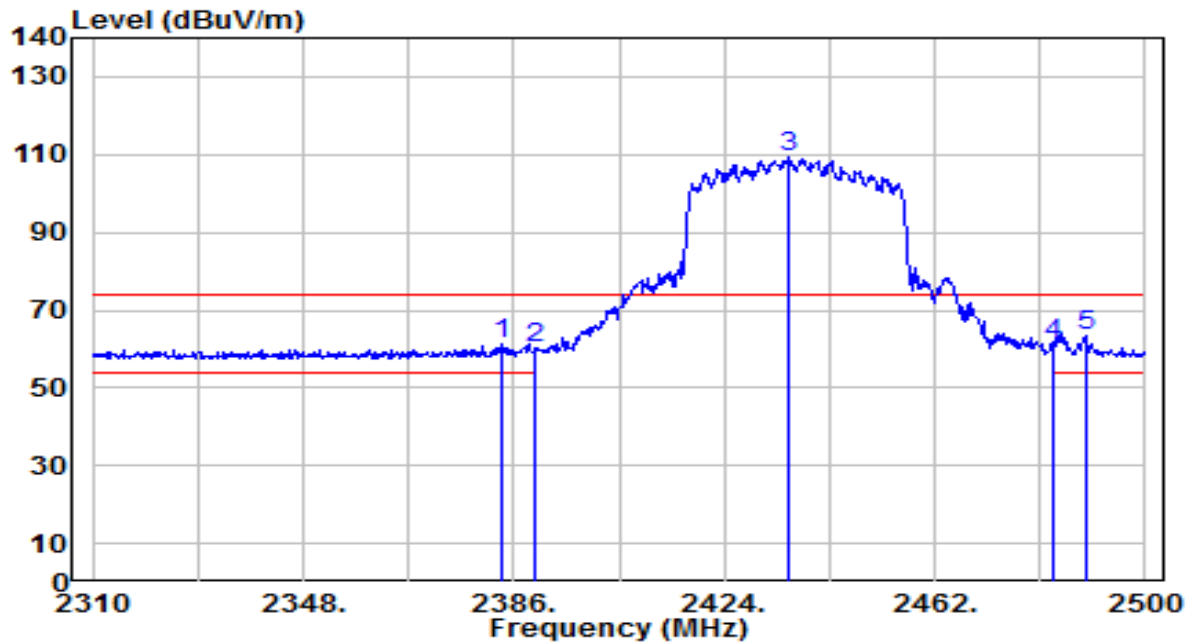


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2383.910        | 29.43          | 31.93      | 61.36                | -12.64      | 74.00          | 195         | 305         | Peak              |
| 2  | 2390.000        | 28.30          | 31.95      | 60.25                | -13.75      | 74.00          | 195         | 305         | Peak              |
| 3  | 2435.780        | 77.03          | 32.12      | 109.15               | N/A         | N/A            | 195         | 305         | Peak              |
| 4  | 2483.500        | 28.85          | 32.30      | 61.15                | -12.85      | 74.00          | 195         | 305         | Peak              |
| 5  | * 2489.170      | 31.16          | 32.32      | 63.48                | -10.52      | 74.00          | 195         | 305         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

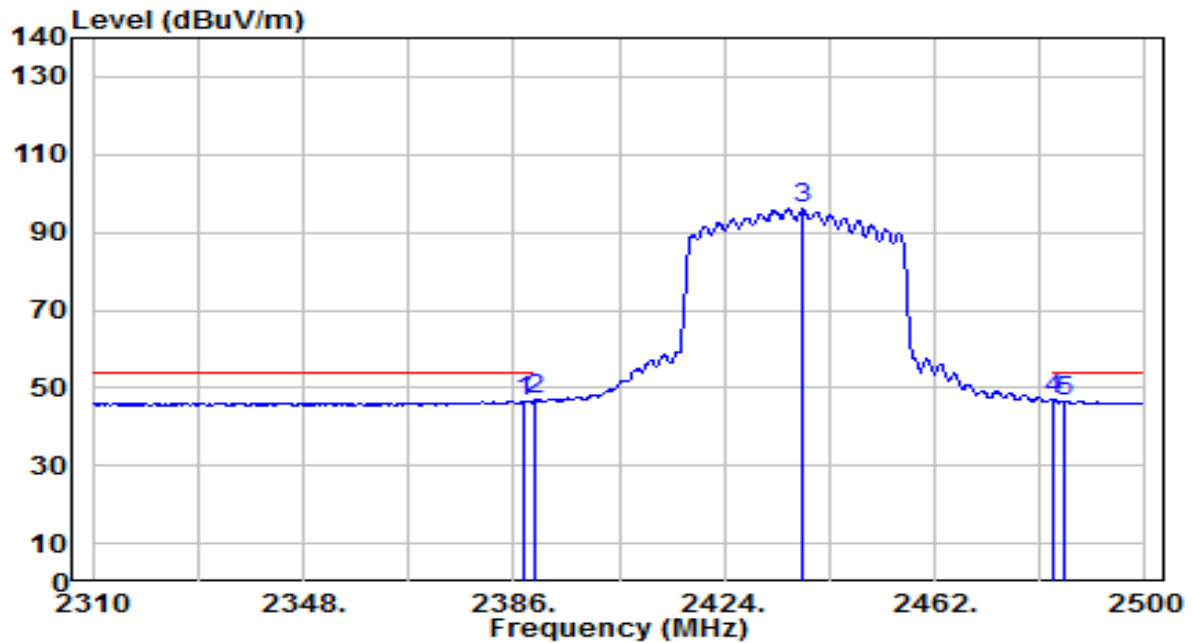


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.900        | 14.60          | 31.94      | 46.54                | -7.46       | 54.00          | 195         | 305         | Average           |
| 2  |   | 2390.000        | 14.85          | 31.95      | 46.80                | -7.20       | 54.00          | 195         | 305         | Average           |
| 3  |   | 2438.060        | 63.78          | 32.13      | 95.91                | N/A         | N/A            | 195         | 305         | Average           |
| 4  | * | 2483.500        | 14.55          | 32.30      | 46.85                | -7.15       | 54.00          | 195         | 305         | Average           |
| 5  |   | 2485.560        | 14.41          | 32.31      | 46.71                | -7.29       | 54.00          | 195         | 305         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

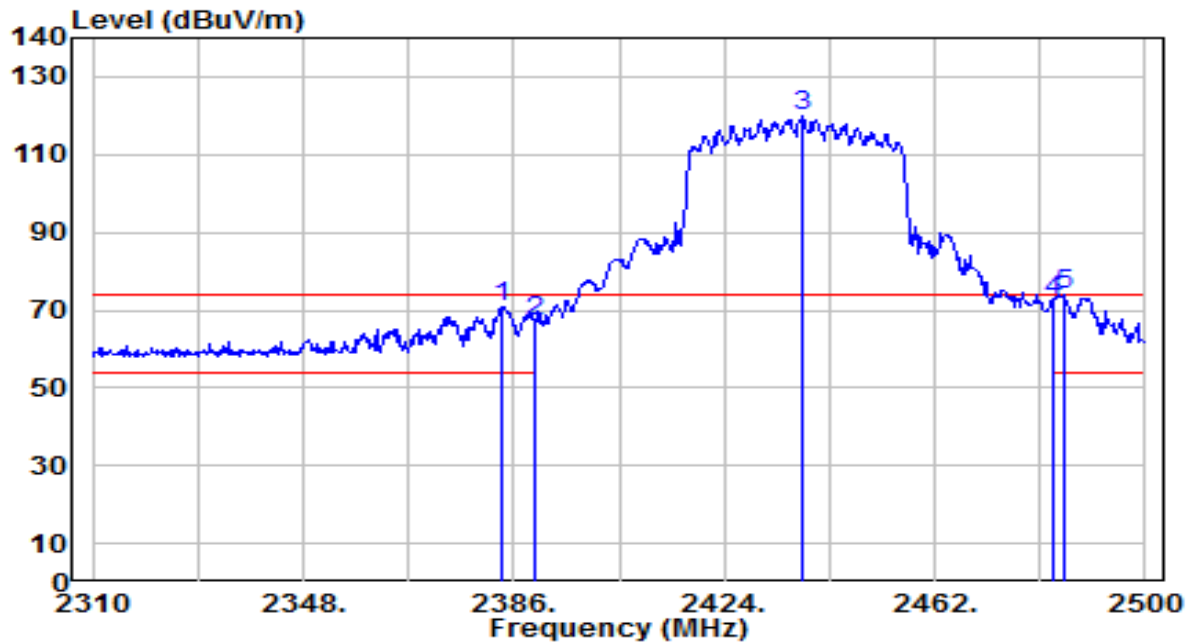


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2383.720        | 38.95          | 31.93      | 70.88                | -3.12       | 74.00          | 195         | 90          | Peak              |
| 2  | 2390.000        | 35.13          | 31.95      | 67.08                | -6.92       | 74.00          | 195         | 90          | Peak              |
| 3  | 2438.060        | 87.61          | 32.13      | 119.74               | N/A         | N/A            | 195         | 90          | Peak              |
| 4  | 2483.500        | 40.16          | 32.30      | 72.46                | -1.54       | 74.00          | 195         | 90          | Peak              |
| 5  | * 2485.180      | 41.49          | 32.30      | 73.79                | -0.21       | 74.00          | 195         | 90          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 6_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

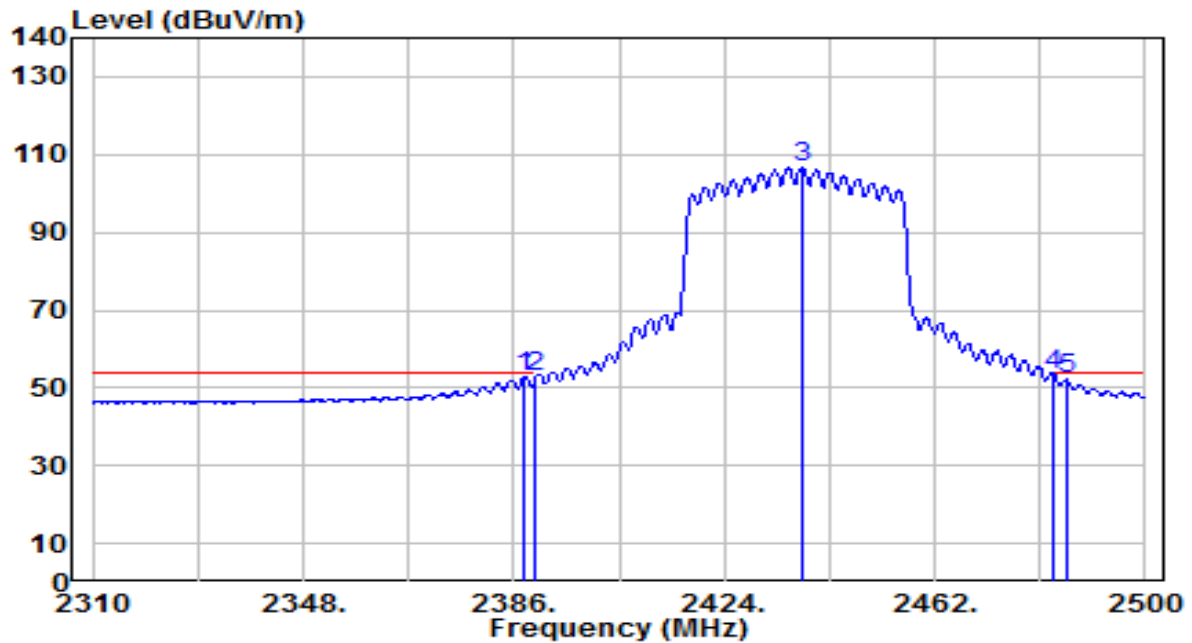


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2387.900        | 20.69          | 31.94      | 52.63                | -1.37       | 54.00          | 195         | 90          | Average           |
| 2  |   | 2390.000        | 20.64          | 31.95      | 52.59                | -1.41       | 54.00          | 195         | 90          | Average           |
| 3  |   | 2438.060        | 74.72          | 32.13      | 106.85               | N/A         | N/A            | 195         | 90          | Average           |
| 4  | * | 2483.500        | 21.19          | 32.30      | 53.49                | -0.51       | 54.00          | 195         | 90          | Average           |
| 5  |   | 2485.750        | 19.91          | 32.31      | 52.22                | -1.78       | 54.00          | 195         | 90          | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 8_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

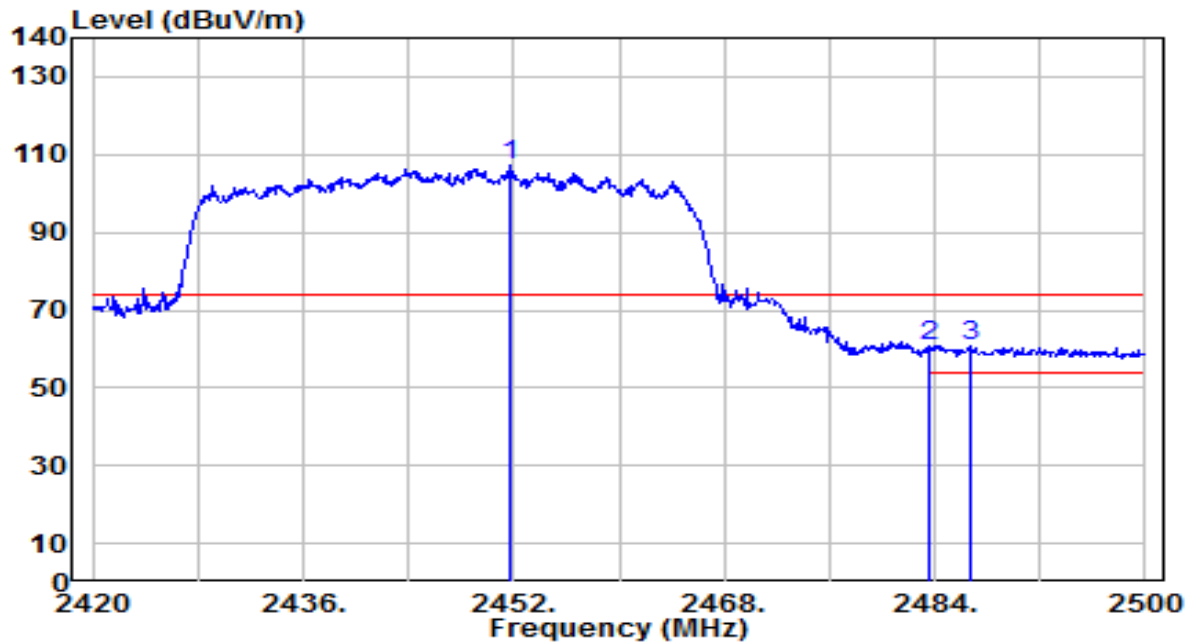


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2451.680        | 75.01          | 32.18      | 107.19               | N/A         | N/A            | 265         | 305         | Peak              |
| 2  | 2483.500        | 28.21          | 32.30      | 60.51                | -13.49      | 74.00          | 265         | 305         | Peak              |
| 3  | * 2486.720      | 28.37          | 32.31      | 60.69                | -13.31      | 74.00          | 265         | 305         | Peak              |

Note:

- " \*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 8_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

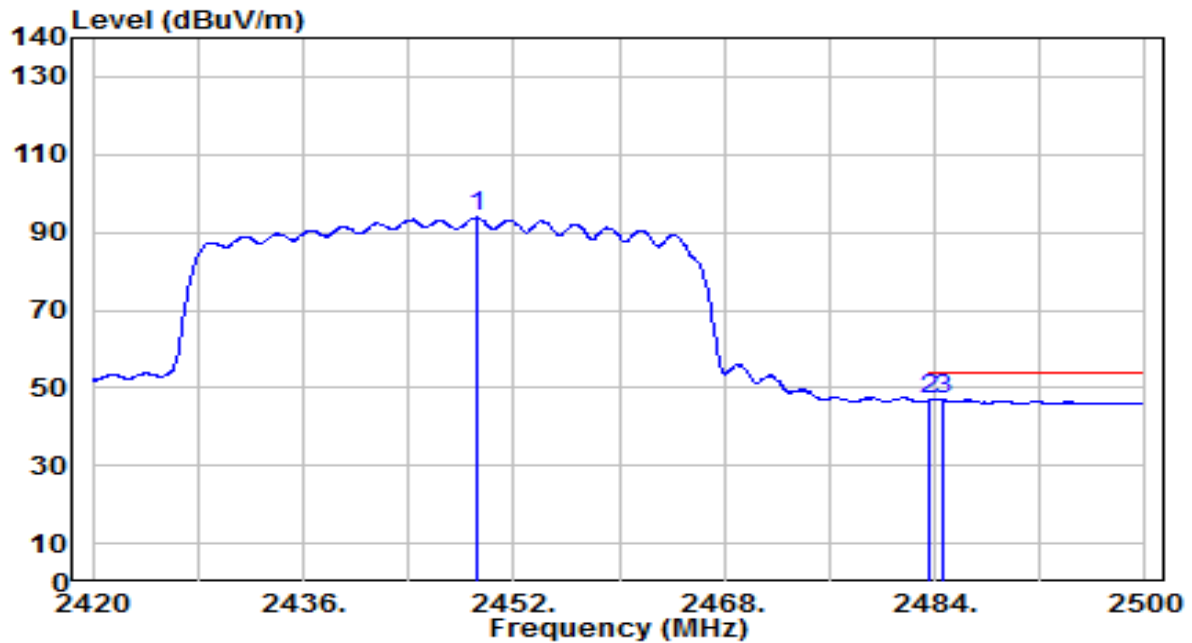


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2449.280        | 61.64          | 32.17      | 93.81                | N/A         | N/A            | 265         | 305         | Average           |
| 2  |   | 2483.500        | 14.55          | 32.30      | 46.85                | -7.15       | 54.00          | 265         | 305         | Average           |
| 3  | * | 2484.720        | 14.60          | 32.30      | 46.90                | -7.10       | 54.00          | 265         | 305         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 8_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

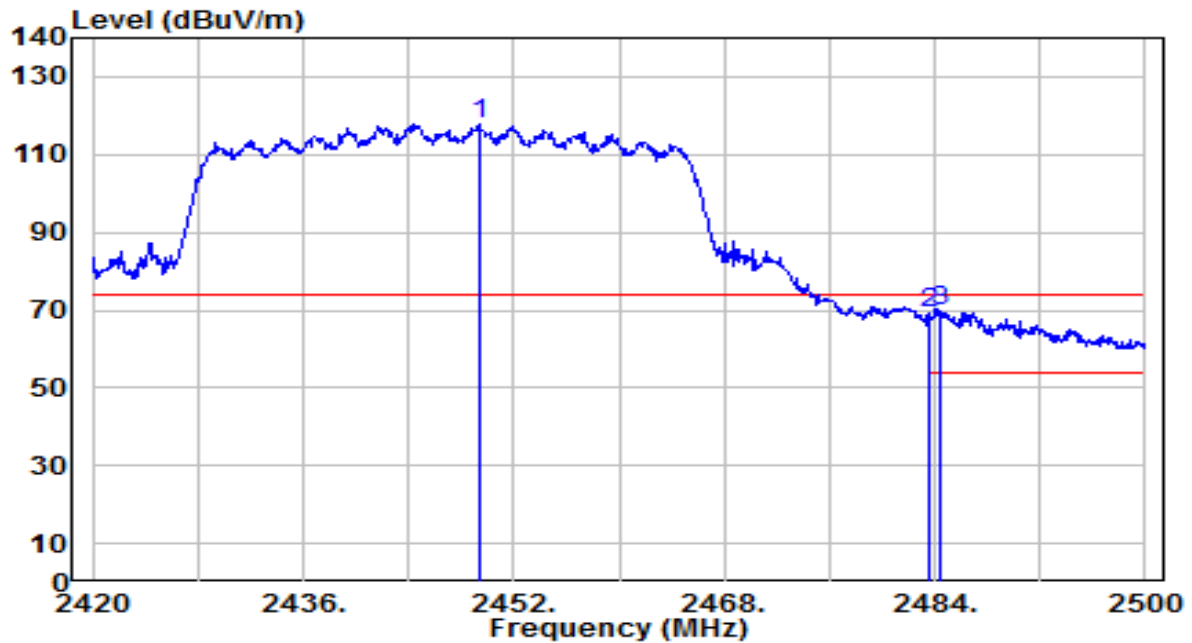


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2449.440        | 85.77          | 32.17      | 117.94               | N/A         | N/A            | 220         | 85          | Peak              |
| 2  | 2483.500        | 37.01          | 32.30      | 69.31                | -4.69       | 74.00          | 220         | 85          | Peak              |
| 3  | * 2484.480      | 37.54          | 32.30      | 69.84                | -4.16       | 74.00          | 220         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-01-02   |
| Factor    | BBHA 9120D                             | Temp. / Humidity     | 23°C /58%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11be-40MHz_TX_CH 8_ANT 0+1         | Test Voltage         | AC 120V/60Hz |

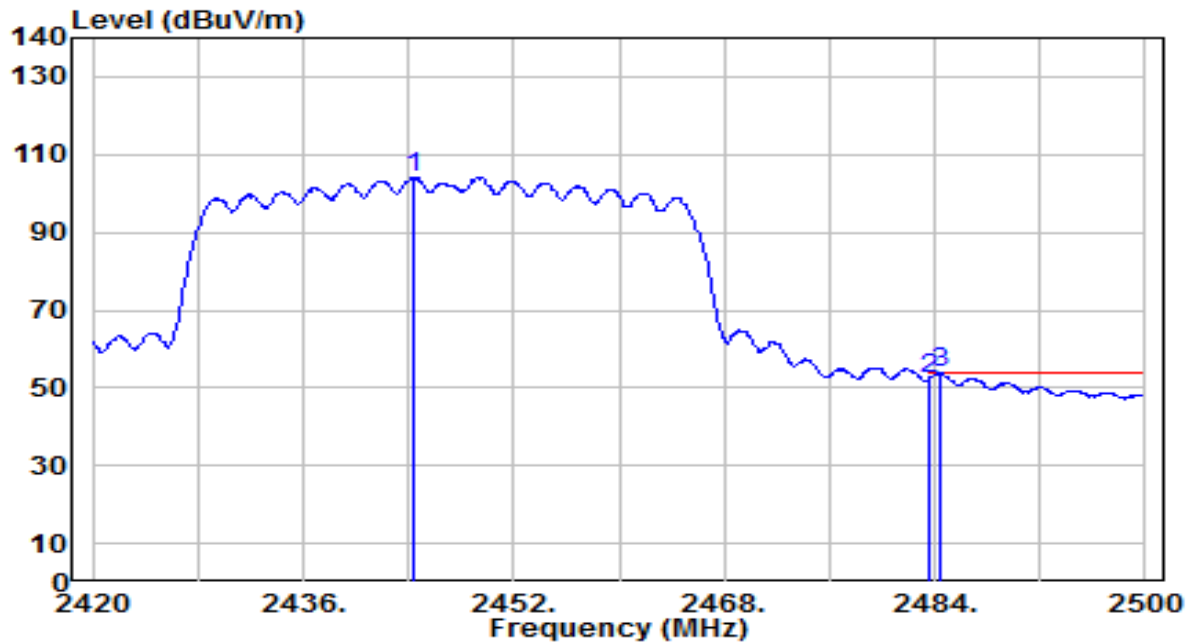

| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 2444.400        | 72.11          | 32.15      | 104.27               | N/A         | N/A            | 220         | 85          | Average           |
| 2  |   | 2483.500        | 19.89          | 32.30      | 52.19                | -1.81       | 54.00          | 220         | 85          | Average           |
| 3  | * | 2484.480        | 21.58          | 32.30      | 53.88                | -0.12       | 54.00          | 220         | 85          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.