


EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

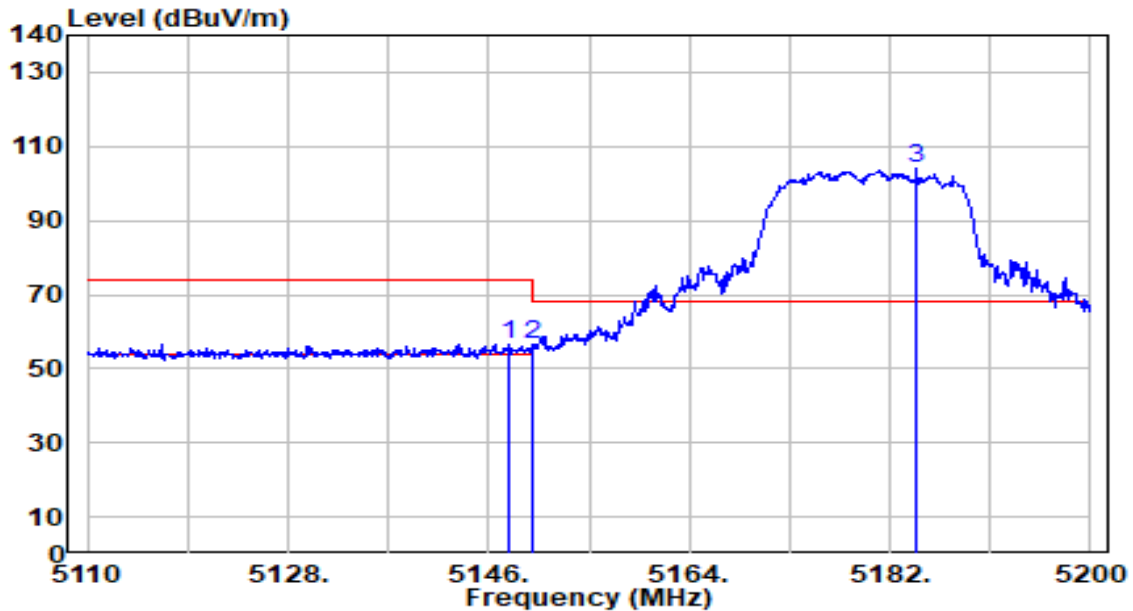


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	56.12	0.65	56.78	-17.22	74.00	318	194	Peak
2		5150.000	55.80	0.65	56.46	-17.54	74.00	318	194	Peak
3		5184.340	103.55	0.69	104.24	N/A	N/A	318	194	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

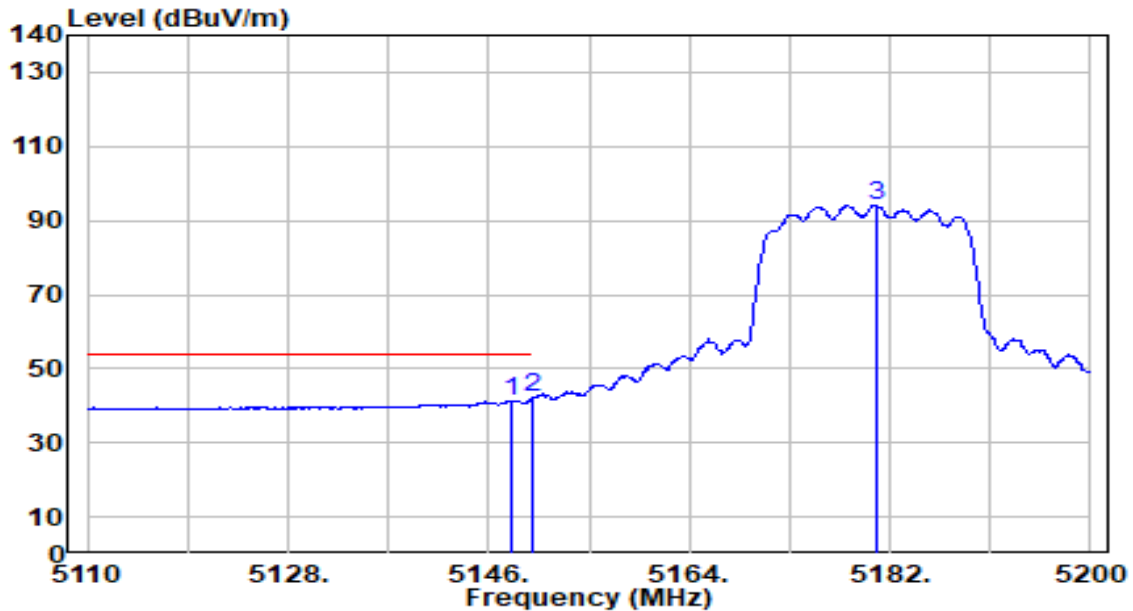


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5147.980	40.73	0.65	41.38	-12.62	54.00	318	194	Average
2	*	5150.000	41.49	0.65	42.14	-11.86	54.00	318	194	Average
3		5180.830	93.43	0.68	94.11	N/A	N/A	318	194	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

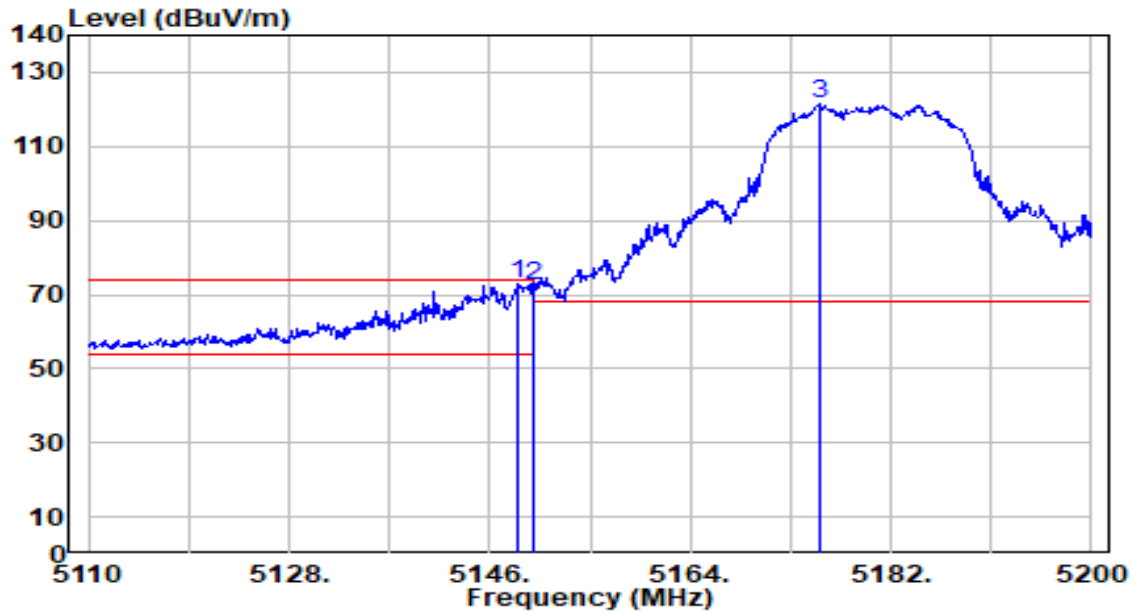


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.520	72.22	0.65	72.87	-1.13	74.00	200	196	Peak
2		5150.000	71.87	0.65	72.53	-1.47	74.00	200	196	Peak
3		5175.610	120.73	0.68	121.41	N/A	N/A	200	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

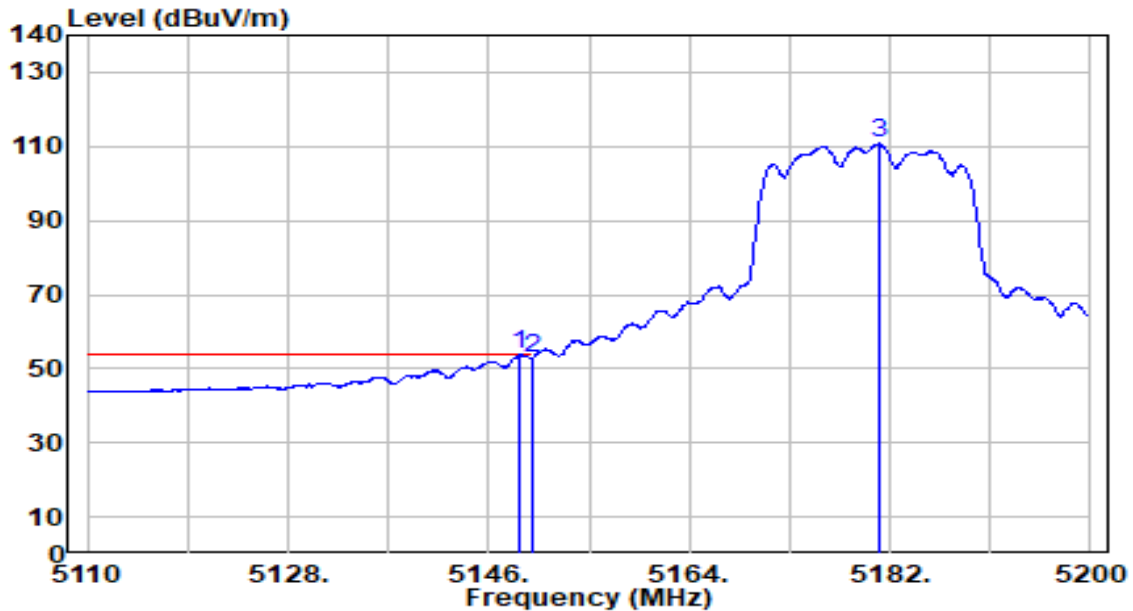


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.790	53.20	0.65	53.85	-0.15	54.00	200	196	Average
2		5150.000	52.37	0.65	53.02	-0.98	54.00	200	196	Average
3		5181.010	110.06	0.68	110.74	N/A	N/A	200	196	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

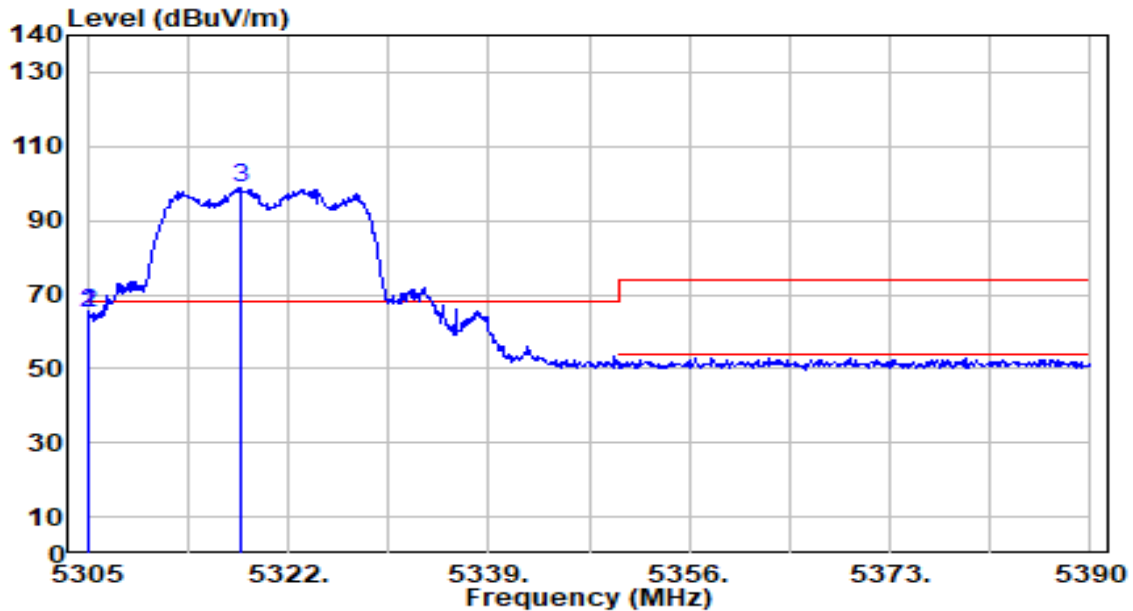


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5305.000	64.31	0.54	64.85	-3.35	68.20	300	160	Peak
2	*	5305.000	64.31	0.54	64.85	-3.35	68.20	300	160	Peak
3		5318.005	98.50	0.52	99.02	N/A	N/A	300	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

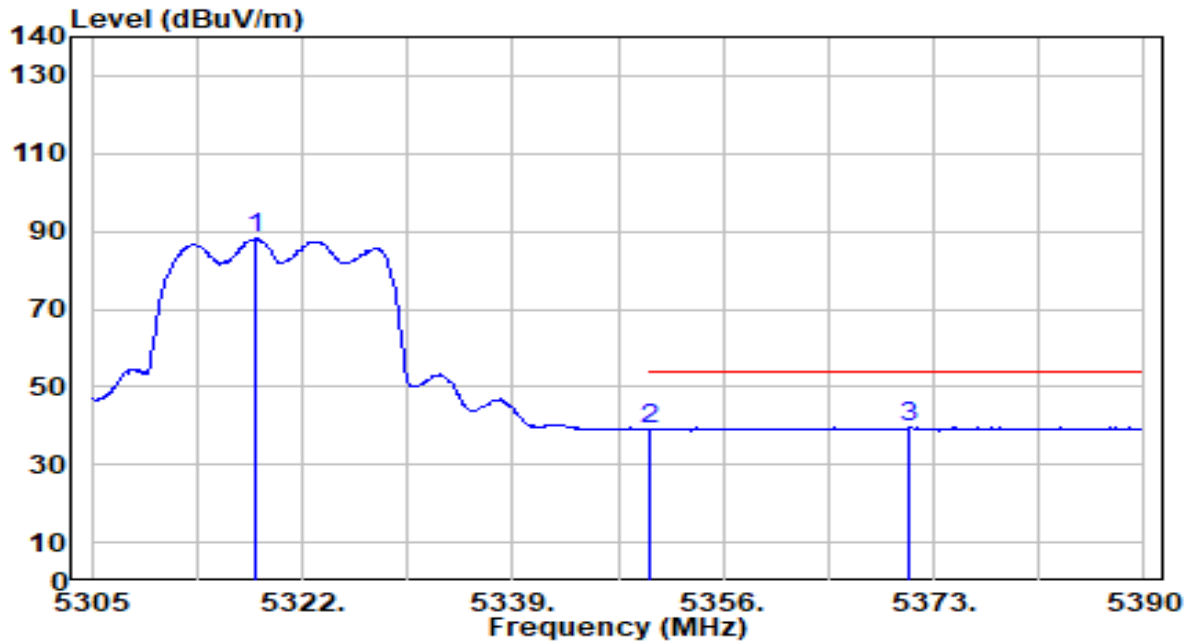


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.260	87.58	0.52	88.10	N/A	N/A	300	160	Average
2	5350.000	38.74	0.47	39.21	-14.79	54.00	300	160	Average
3	* 5371.045	39.13	0.44	39.57	-14.43	54.00	300	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

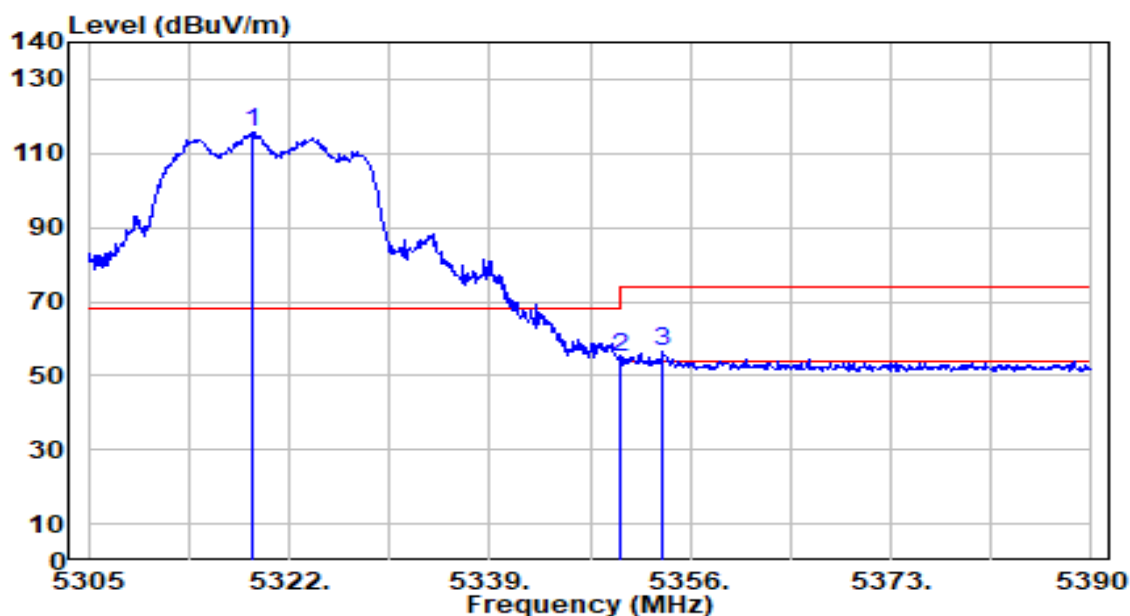


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.940	115.23	0.52	115.75	N/A	N/A	200	165	Peak
2	5350.000	54.44	0.47	54.91	-19.09	74.00	200	165	Peak
3	* 5353.705	55.93	0.47	56.40	-17.60	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

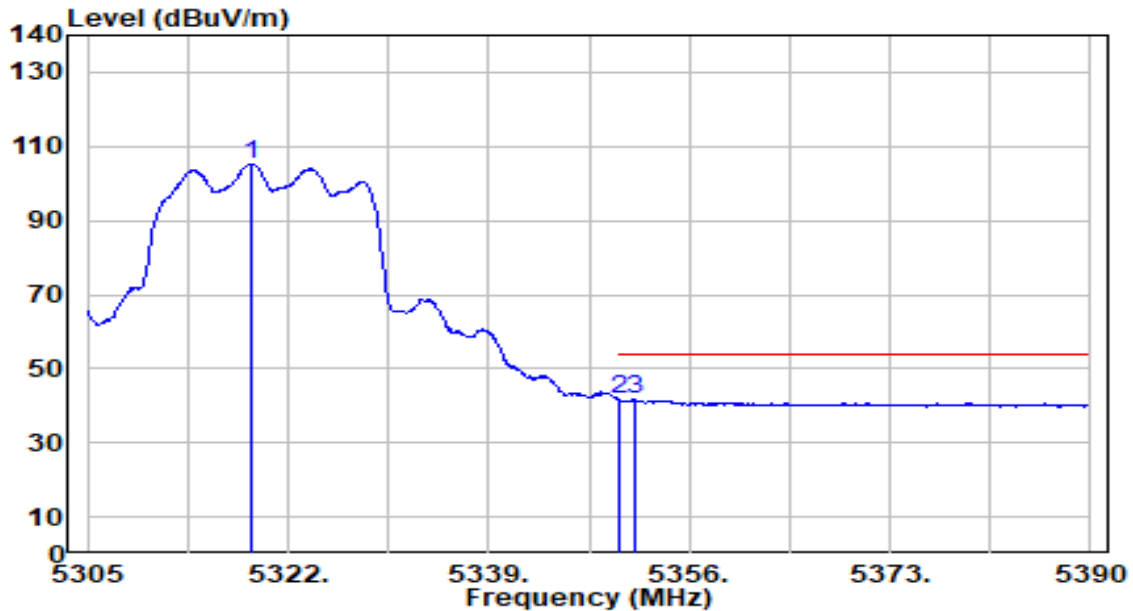


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5318.855	104.86	0.52	105.38	N/A	N/A	200	165	Average
2	*	5350.000	41.27	0.47	41.74	-12.26	54.00	200	165	Average
3		5351.495	41.09	0.47	41.56	-12.44	54.00	200	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

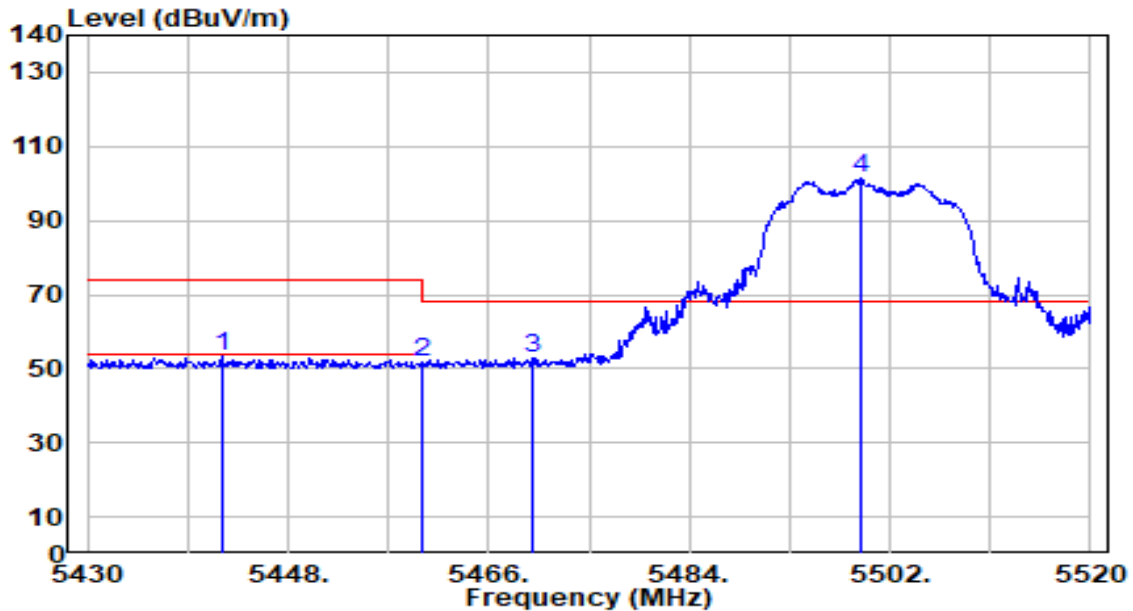


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5442.060	52.85	0.58	53.43	-20.57	74.00	248	186	Peak
2	5460.000	51.18	0.66	51.84	-22.16	74.00	248	186	Peak
3	* 5470.000	52.31	0.71	53.01	-15.19	68.20	248	186	Peak
4	5499.480	100.40	0.84	101.23	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

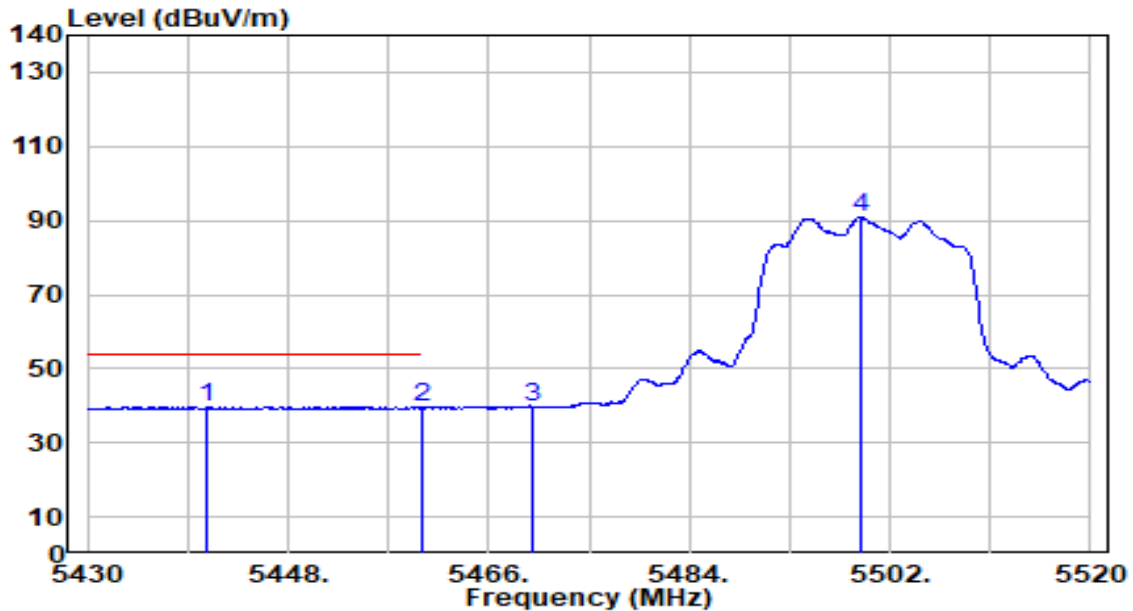


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5440.800	39.11	0.58	39.68	-14.32	54.00	248	186	Average
2		5460.000	38.79	0.66	39.45	-14.55	54.00	248	186	Average
3		5470.000	39.13	0.71	39.84	N/A	N/A	248	186	Average
4		5499.480	90.07	0.84	90.91	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

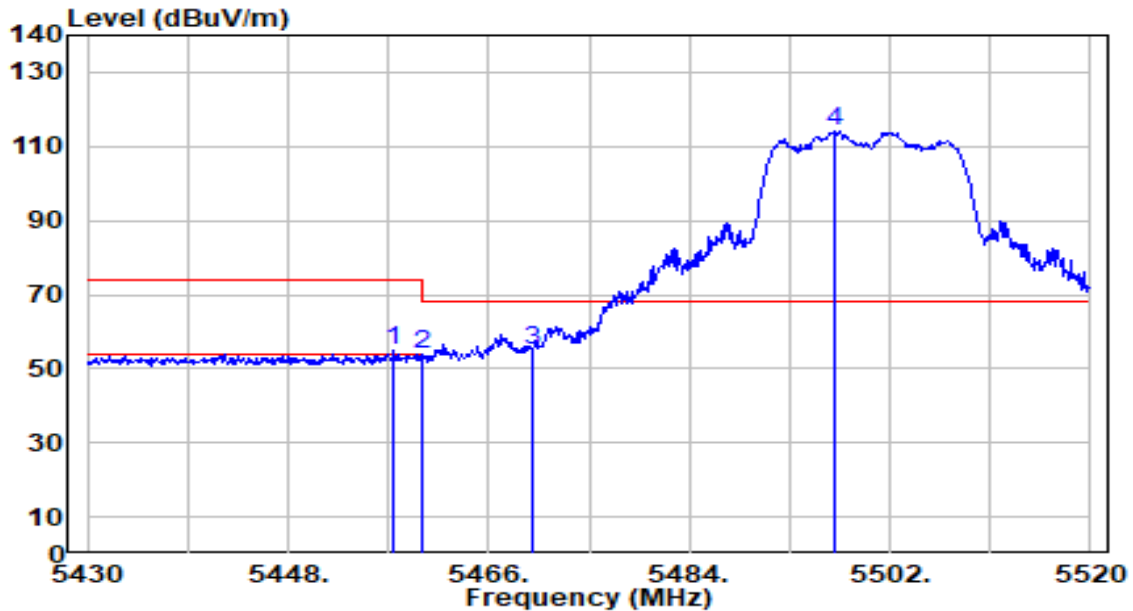


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.450	54.29	0.65	54.94	-19.06	74.00	184	192	Peak
2	5460.000	53.10	0.66	53.77	-20.23	74.00	184	192	Peak
3	* 5470.000	54.29	0.71	54.99	-13.21	68.20	184	192	Peak
4	5497.140	113.43	0.83	114.26	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

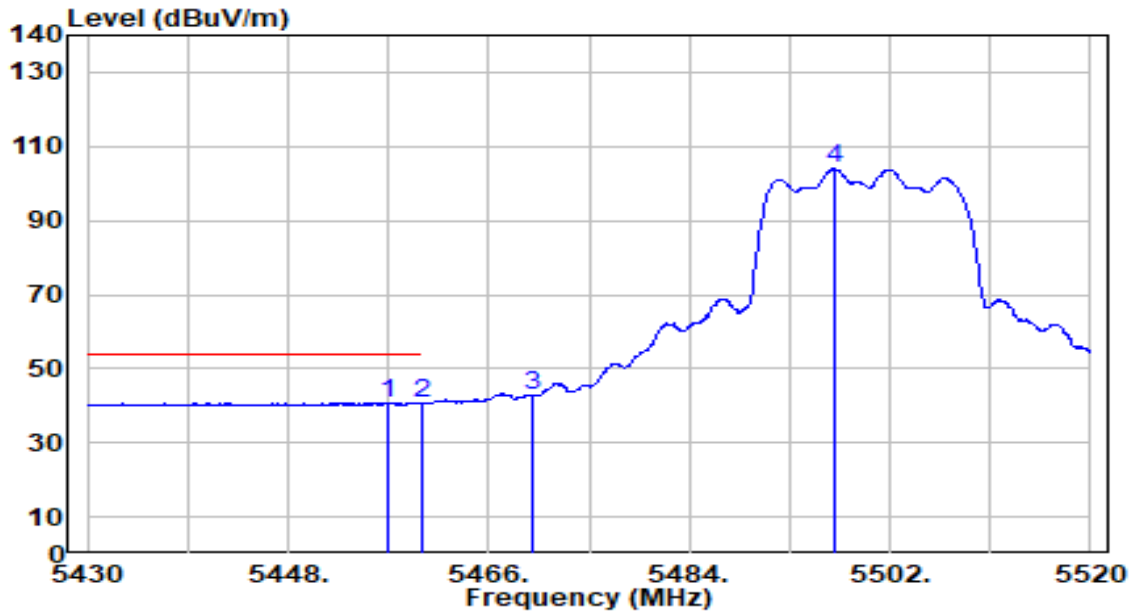


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.910	40.17	0.65	40.82	-13.18	54.00	184	192	Average
2		5460.000	39.97	0.66	40.64	-13.36	54.00	184	192	Average
3		5470.000	42.17	0.71	42.88	N/A	N/A	184	192	Average
4		5496.960	103.17	0.83	104.00	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

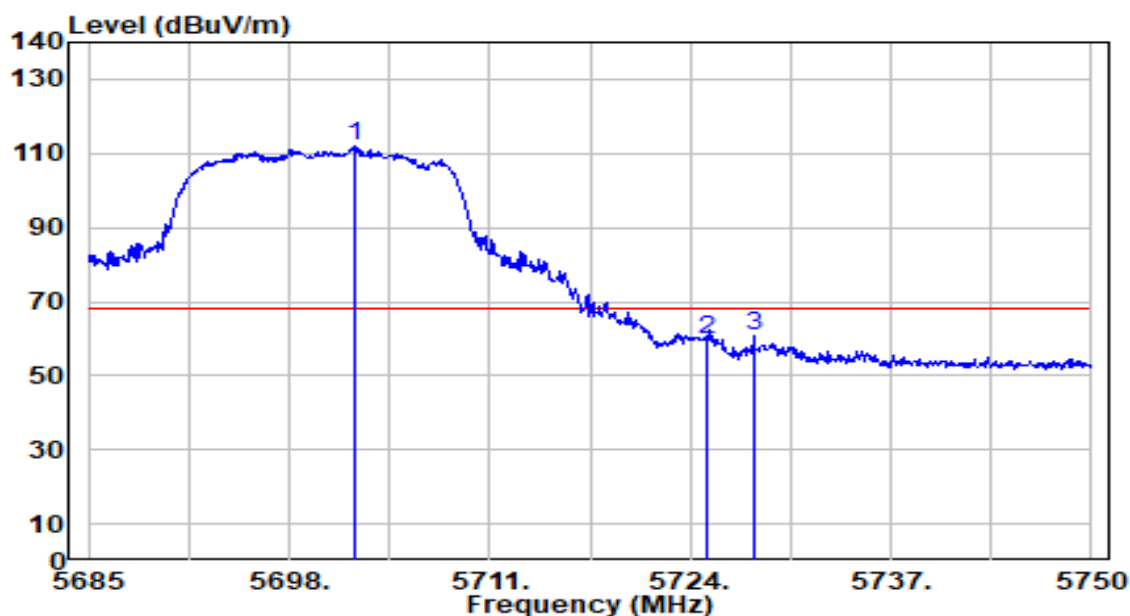


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.225	109.95	1.79	111.74	N/A	N/A	216	196	Peak
2	5725.000	57.90	1.89	59.79	-8.41	68.20	216	196	Peak
3	* 5728.160	58.89	1.91	60.80	-7.40	68.20	216	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

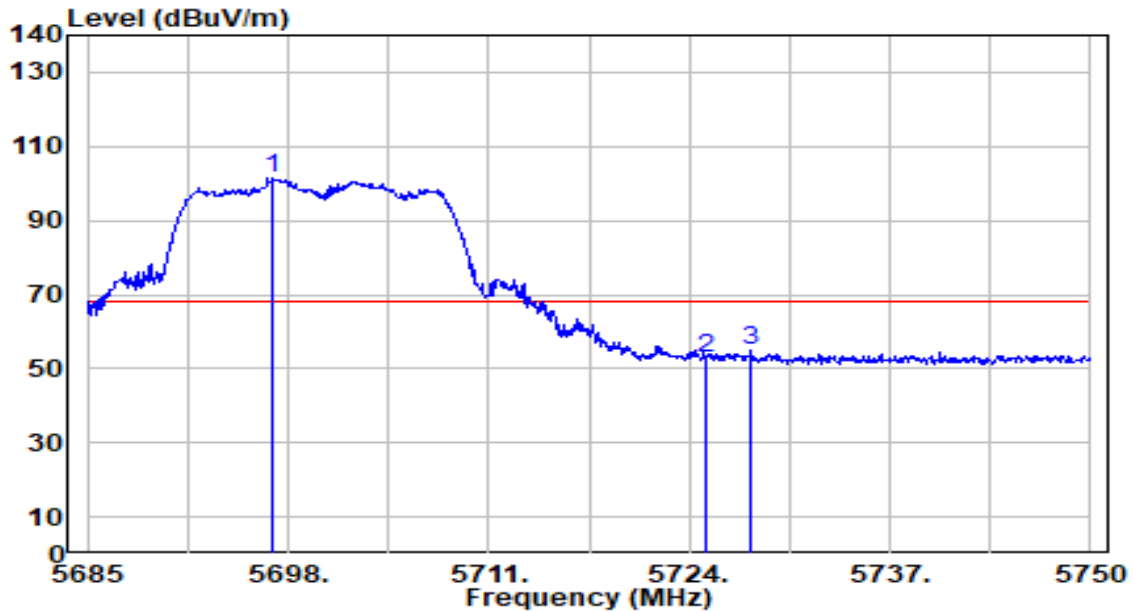


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.025	99.53	1.76	101.29	N/A	N/A	174	91	Peak
2	5725.000	51.16	1.89	53.05	-15.15	68.20	174	91	Peak
3	* 5728.030	53.13	1.91	55.04	-13.16	68.20	174	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

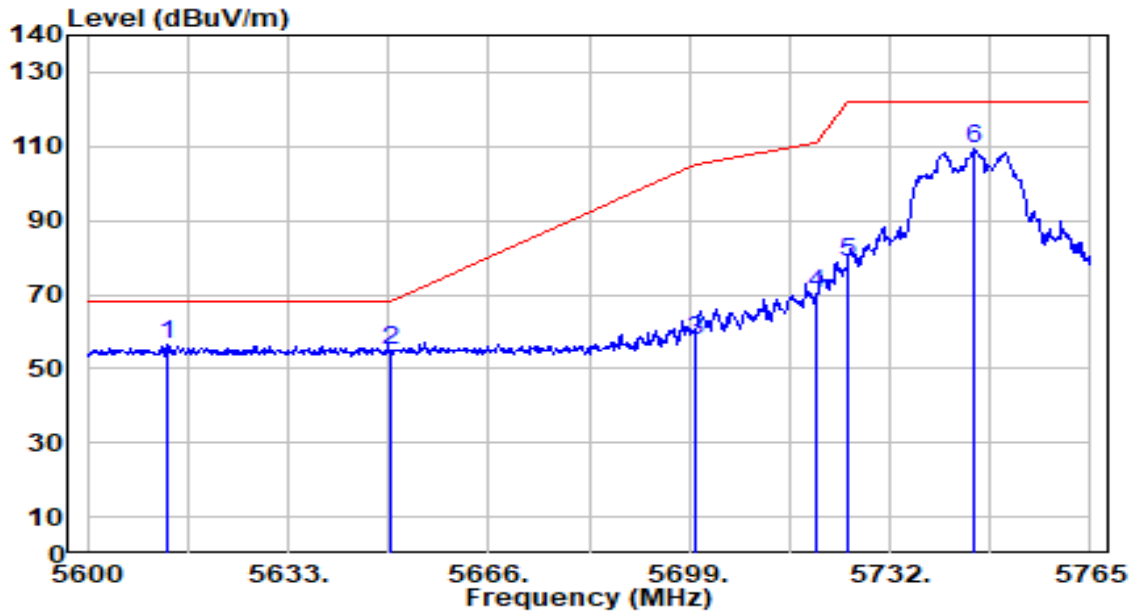


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5613.035	54.97	1.37	56.34	-11.86	68.20	183	168	Peak
2		5650.000	53.27	1.54	54.81	-13.39	68.20	183	168	Peak
3		5700.000	56.04	1.78	57.82	-47.38	105.20	183	168	Peak
4		5720.000	68.26	1.87	70.13	-40.67	110.80	183	168	Peak
5		5725.000	76.57	1.89	78.46	-43.74	122.20	183	168	Peak
6		5746.025	107.27	1.99	109.26	N/A	N/A	183	168	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

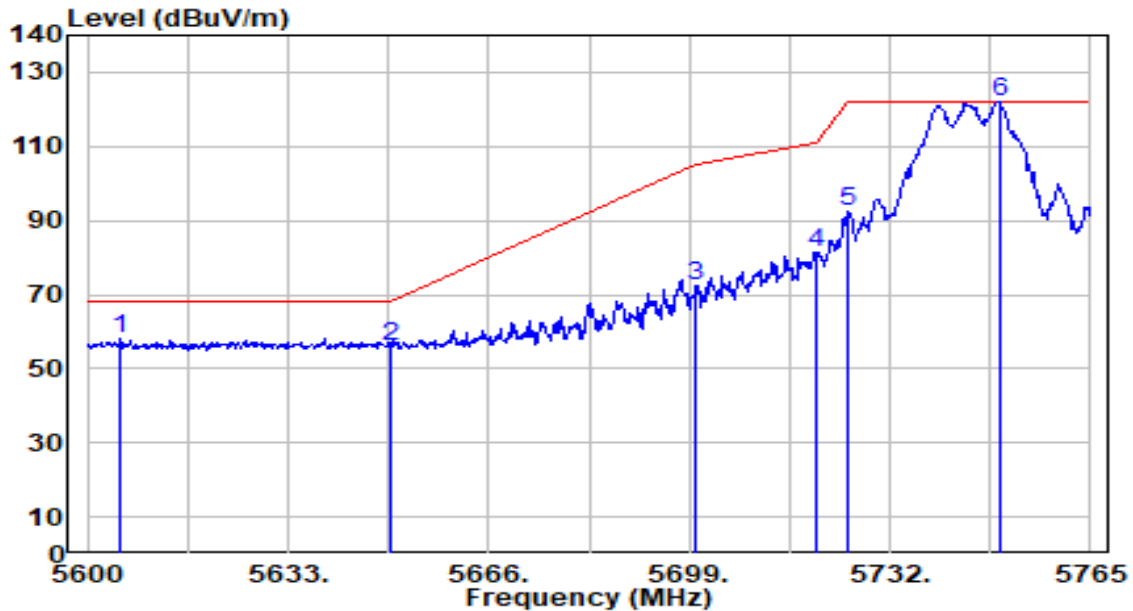


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5605.445	56.91	1.33	58.25	-9.95	68.20	181	165	Peak
2		5650.000	54.63	1.54	56.18	-12.02	68.20	181	165	Peak
3		5700.000	70.82	1.78	72.60	-32.60	105.20	181	165	Peak
4		5720.000	79.33	1.87	81.20	-29.60	110.80	181	165	Peak
5		5725.000	90.32	1.89	92.21	-29.99	122.20	181	165	Peak
6		5749.985	120.27	2.01	122.28	N/A	N/A	181	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

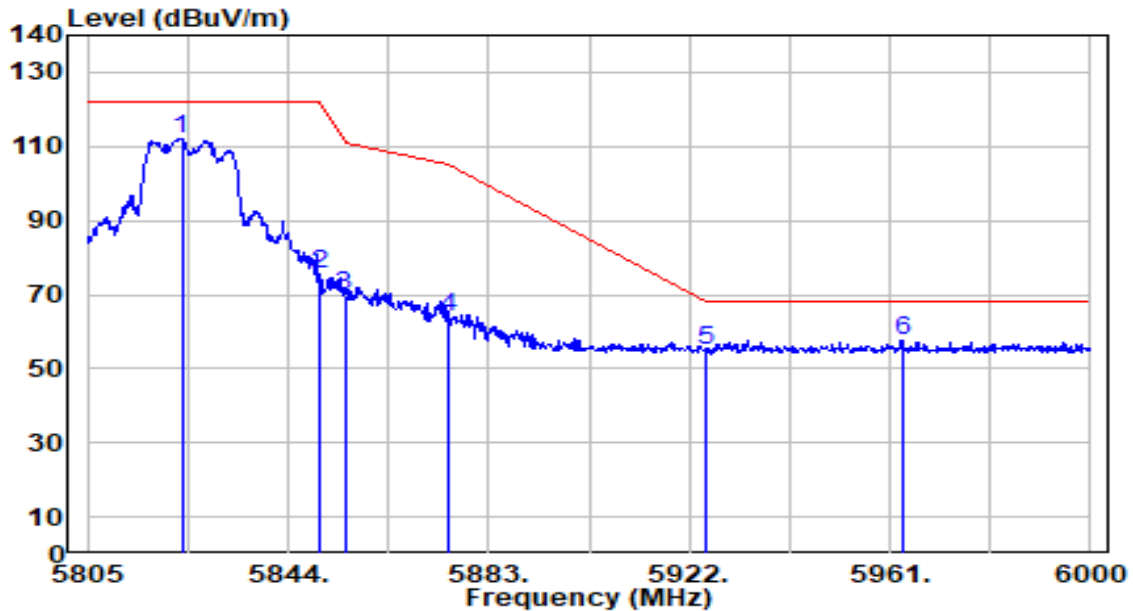


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.330	109.88	2.25	112.13	N/A	N/A	315	164	Peak
2	5850.000	73.35	2.25	75.61	-46.59	122.20	315	164	Peak
3	5855.000	67.33	2.25	69.58	-41.22	110.80	315	164	Peak
4	5875.000	61.91	2.26	64.17	-41.03	105.20	315	164	Peak
5	5925.000	52.44	2.27	54.71	-13.49	68.20	315	164	Peak
6	* 5963.340	55.37	2.27	57.65	-10.55	68.20	315	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

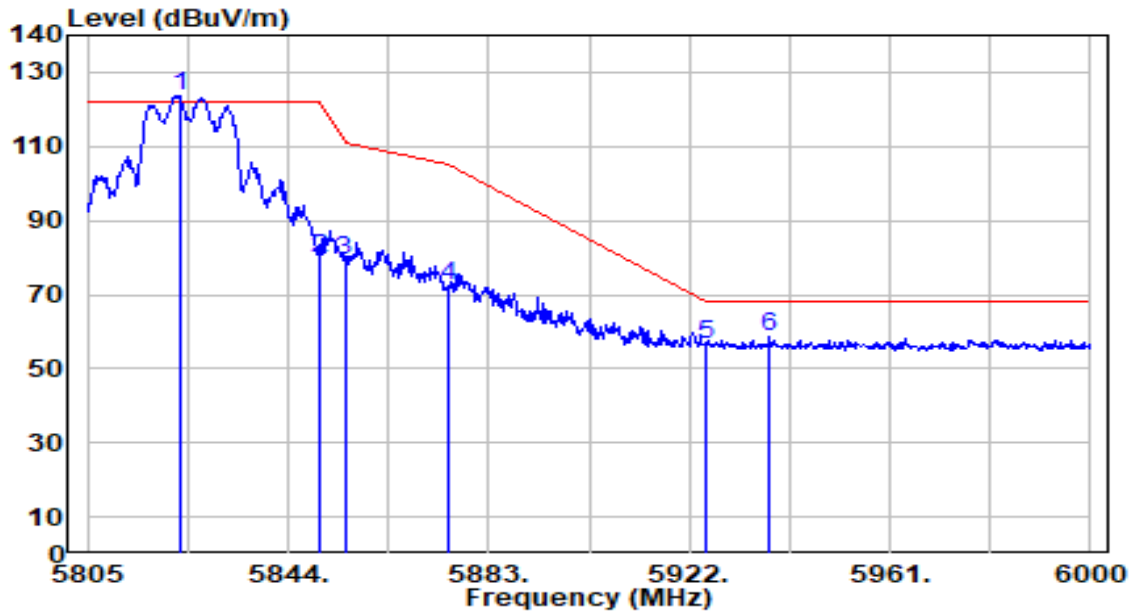


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.940	121.46	2.25	123.71	N/A	N/A	115	163	Peak
2	5850.000	77.35	2.25	79.60	-42.60	122.20	115	163	Peak
3	5855.000	77.19	2.25	79.44	-31.36	110.80	115	163	Peak
4	5875.000	70.13	2.26	72.39	-32.81	105.20	115	163	Peak
5	5925.000	54.30	2.27	56.57	-11.63	68.20	115	163	Peak
6	* 5937.600	56.14	2.27	58.41	-9.79	68.20	115	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

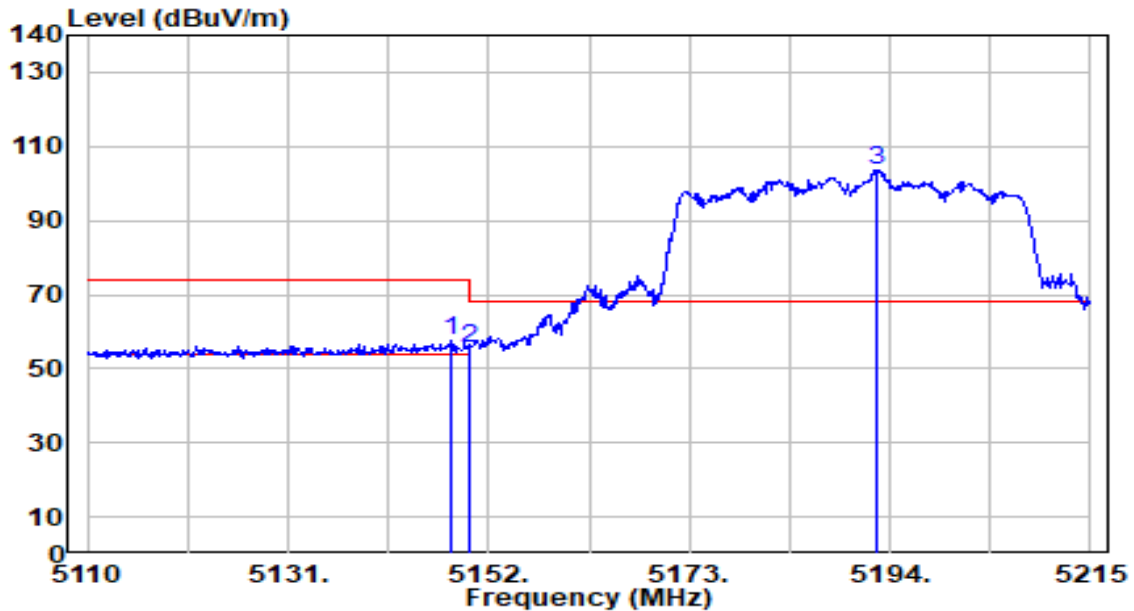


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.115	56.84	0.65	57.49	-16.51	74.00	318	197	Peak
2		5150.000	54.94	0.65	55.59	-18.41	74.00	318	197	Peak
3		5192.635	102.87	0.69	103.56	N/A	N/A	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

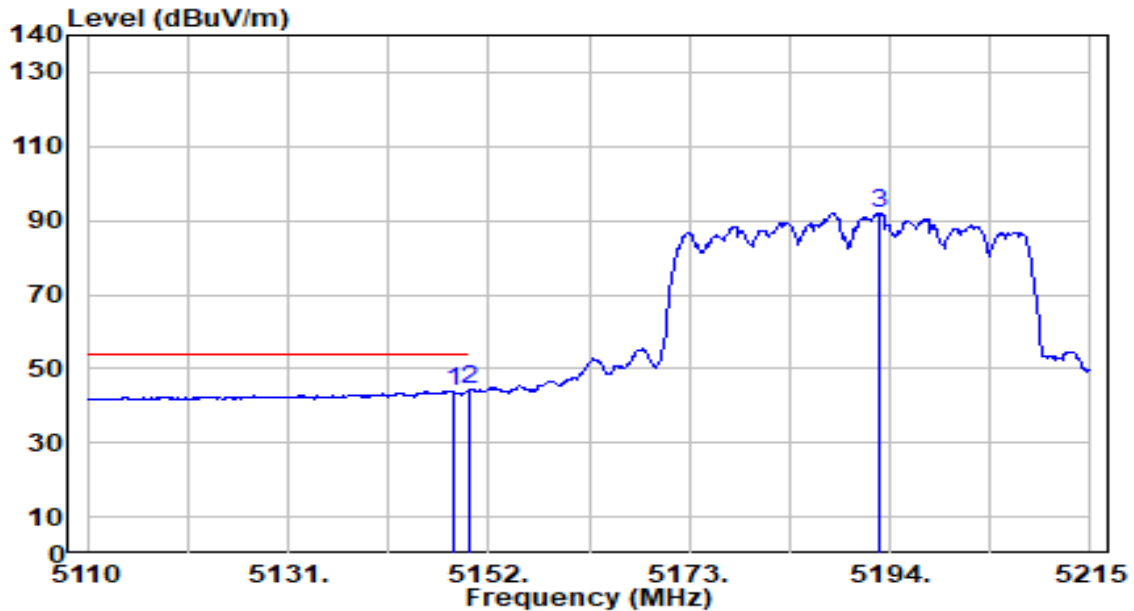


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.430	43.31	0.65	43.97	-10.03	54.00	318	197	Average
2	* 5150.000	43.47	0.65	44.12	-9.88	54.00	318	197	Average
3	5192.845	91.47	0.70	92.16	N/A	N/A	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

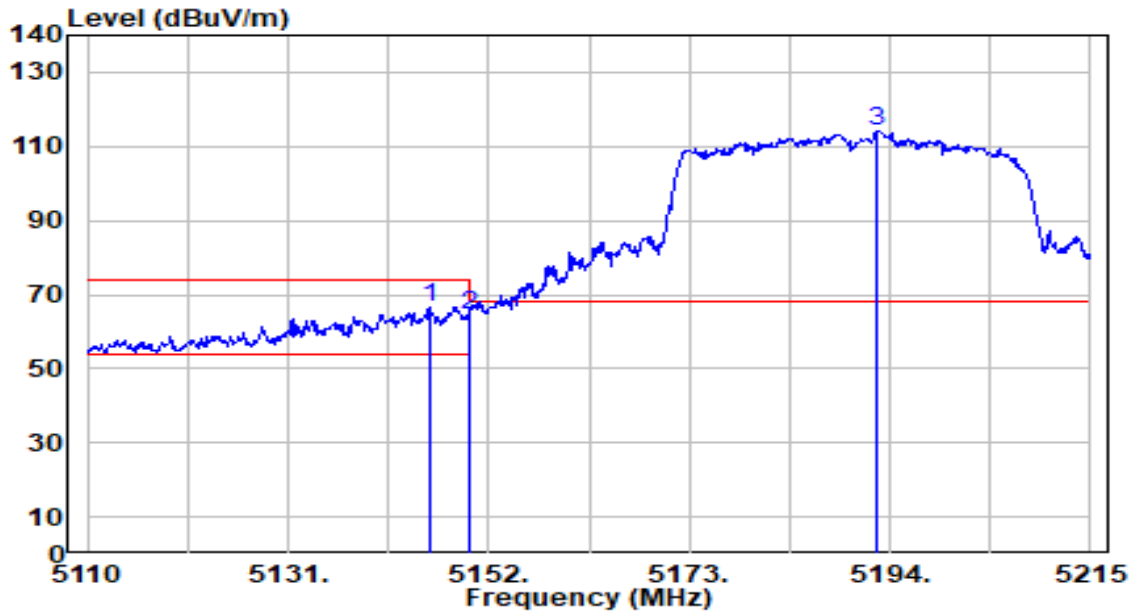


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.805	66.01	0.65	66.66	-7.34	74.00	200	290	Peak
2		5150.000	63.86	0.65	64.52	-9.48	74.00	200	290	Peak
3		5192.740	113.34	0.70	114.03	N/A	N/A	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

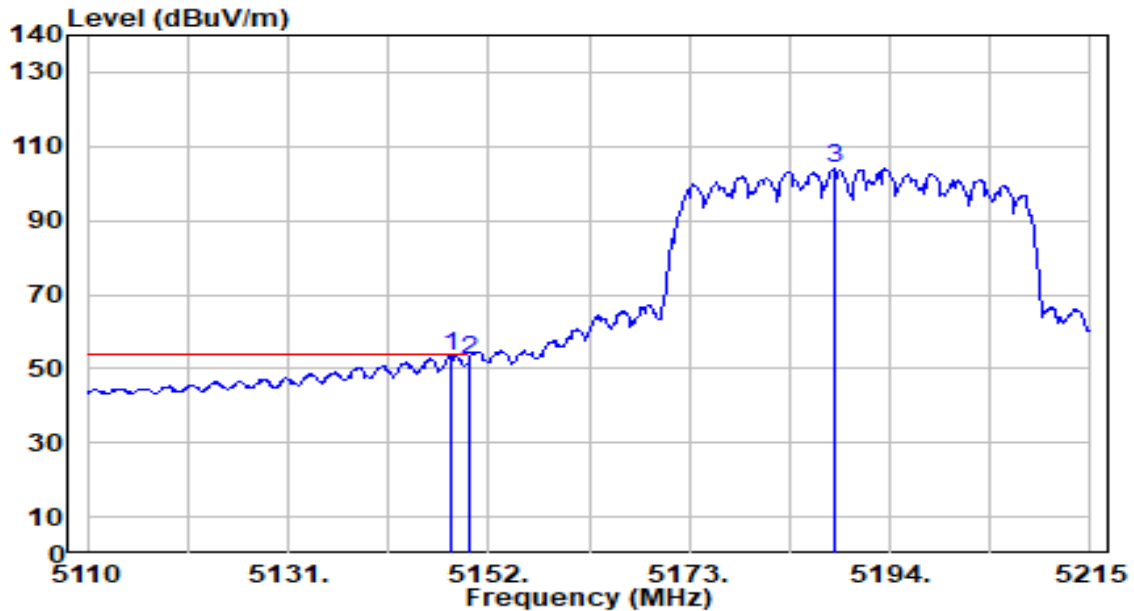


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.010	52.82	0.65	53.47	-0.53	54.00	200	290	Average
2		5150.000	51.81	0.65	52.47	-1.53	54.00	200	290	Average
3		5188.225	103.27	0.69	103.96	N/A	N/A	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

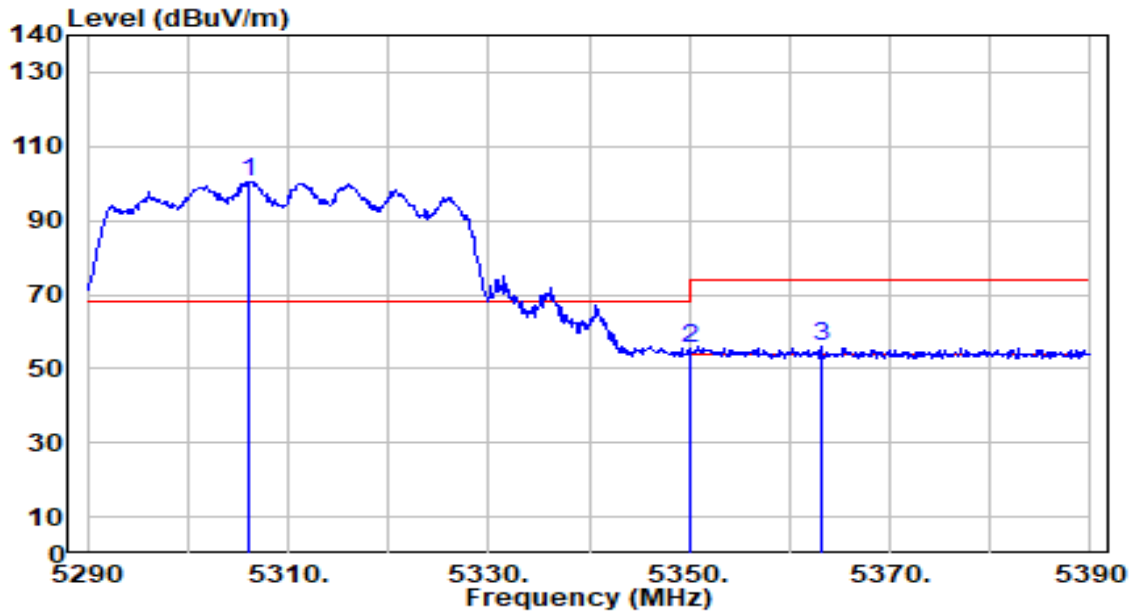


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.000	99.79	0.54	100.33	N/A	N/A	300	186	Peak
2	5350.000	54.92	0.47	55.39	-18.61	74.00	300	186	Peak
3	* 5363.200	55.45	0.45	55.90	-18.10	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

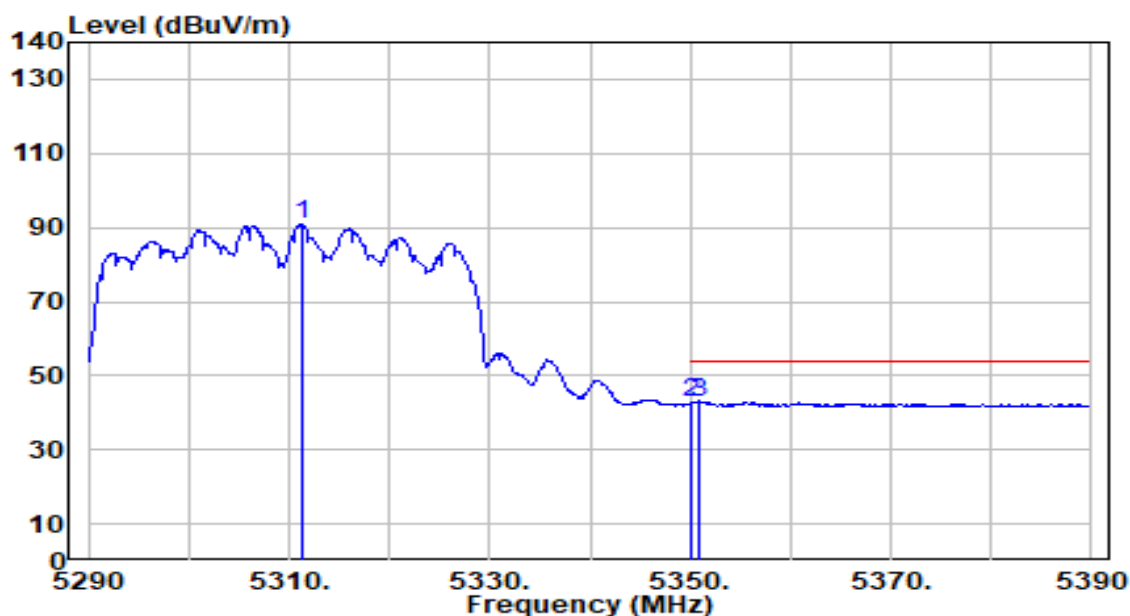


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.200	90.22	0.53	90.75	N/A	N/A	300	186	Average
2	5350.000	42.08	0.47	42.56	-11.44	54.00	300	186	Average
3	* 5351.000	42.56	0.47	43.03	-10.97	54.00	300	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

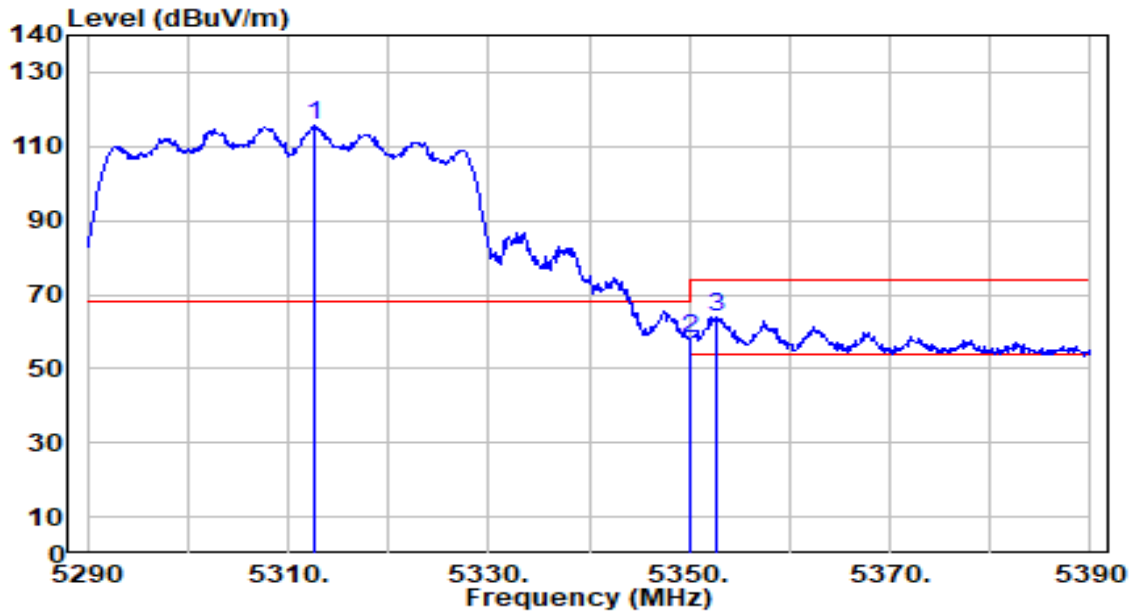


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.600	114.95	0.53	115.48	N/A	N/A	200	165	Peak
2	5350.000	57.70	0.47	58.17	-15.83	74.00	200	165	Peak
3	* 5352.600	63.44	0.47	63.91	-10.09	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

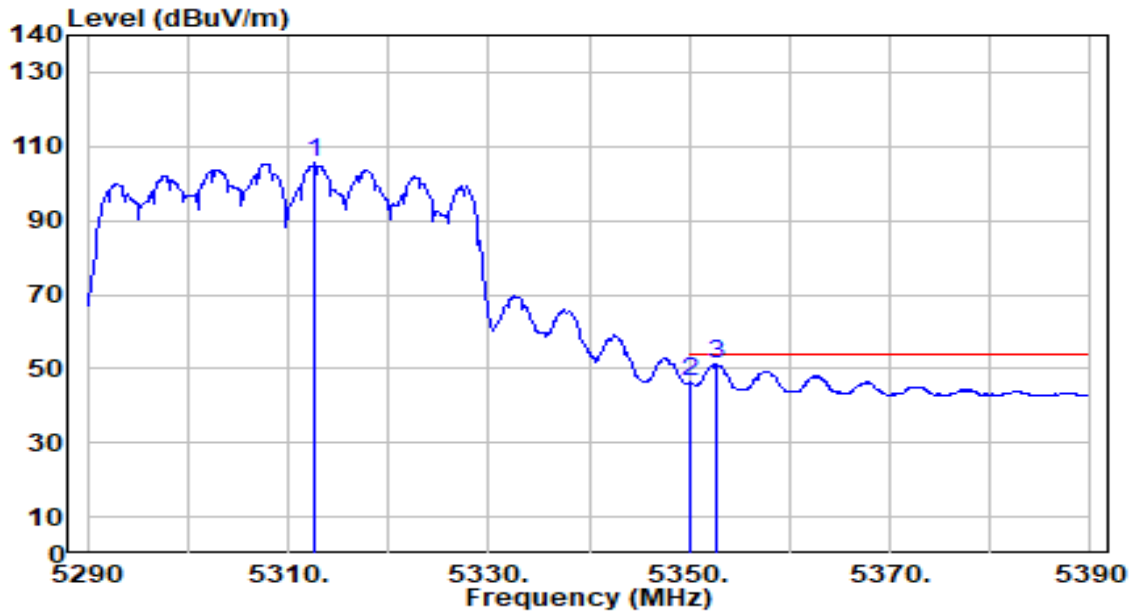


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.700	104.90	0.53	105.43	N/A	N/A	200	165	Average
2	5350.000	45.90	0.47	46.37	-7.63	54.00	200	165	Average
3	* 5352.600	50.67	0.47	51.13	-2.87	54.00	200	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

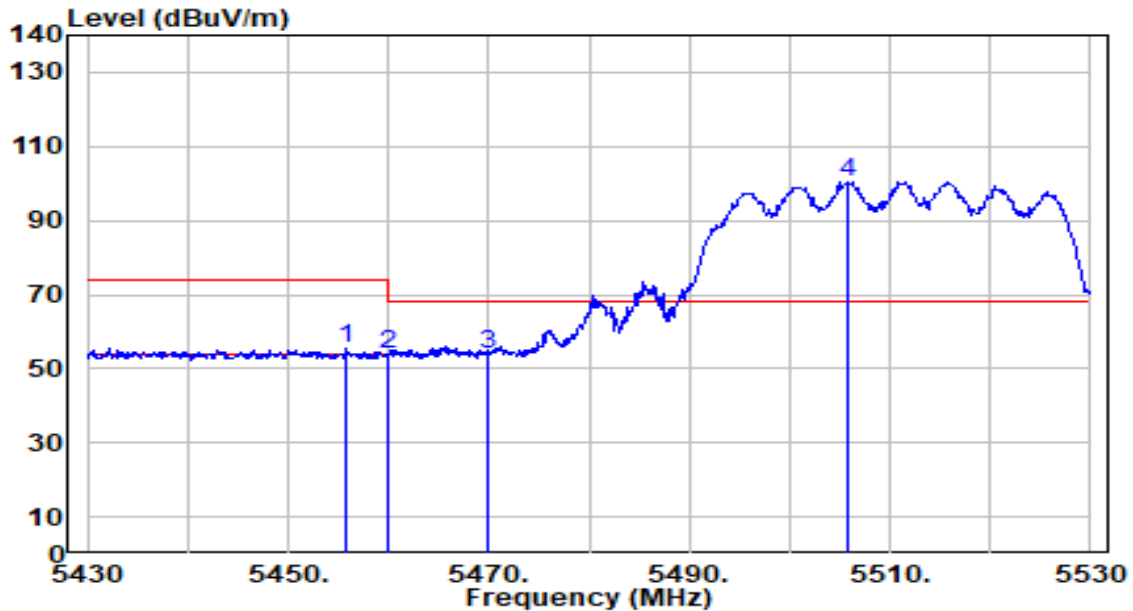


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.800	54.83	0.64	55.47	-18.53	74.00	248	186	Peak
2	5460.000	53.35	0.66	54.01	-19.99	74.00	248	186	Peak
3	* 5470.000	53.31	0.71	54.01	-14.19	68.20	248	186	Peak
4	5505.900	99.58	0.87	100.44	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

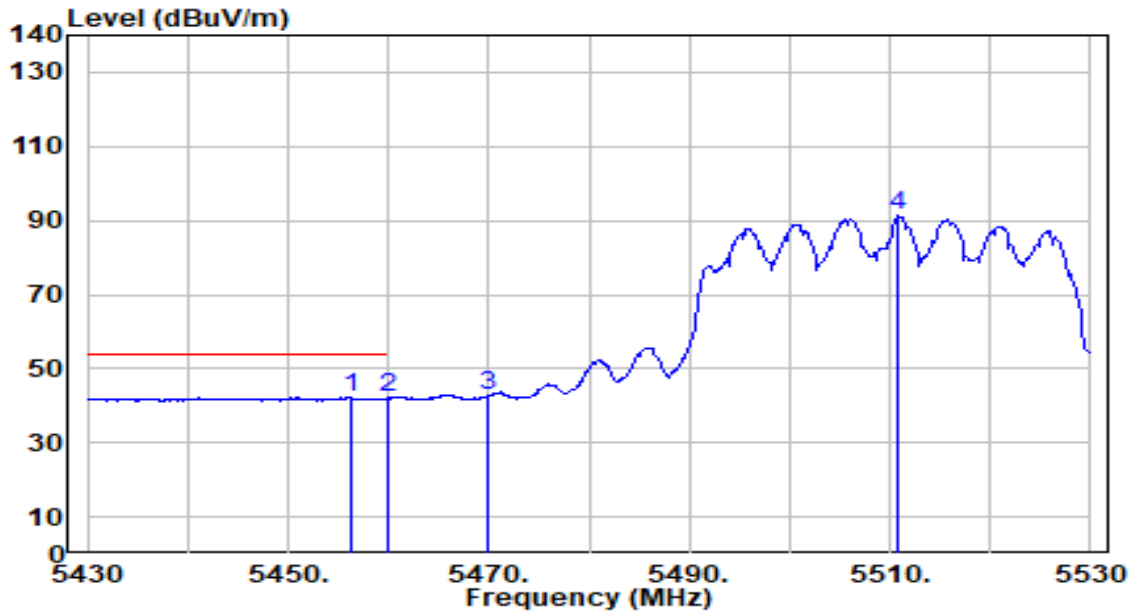


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.300	41.57	0.65	42.21	-11.79	54.00	248	186	Average
2		5460.000	41.52	0.66	42.18	-11.82	54.00	248	186	Average
3		5470.000	41.93	0.71	42.63	N/A	N/A	248	186	Average
4		5510.900	90.24	0.89	91.13	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

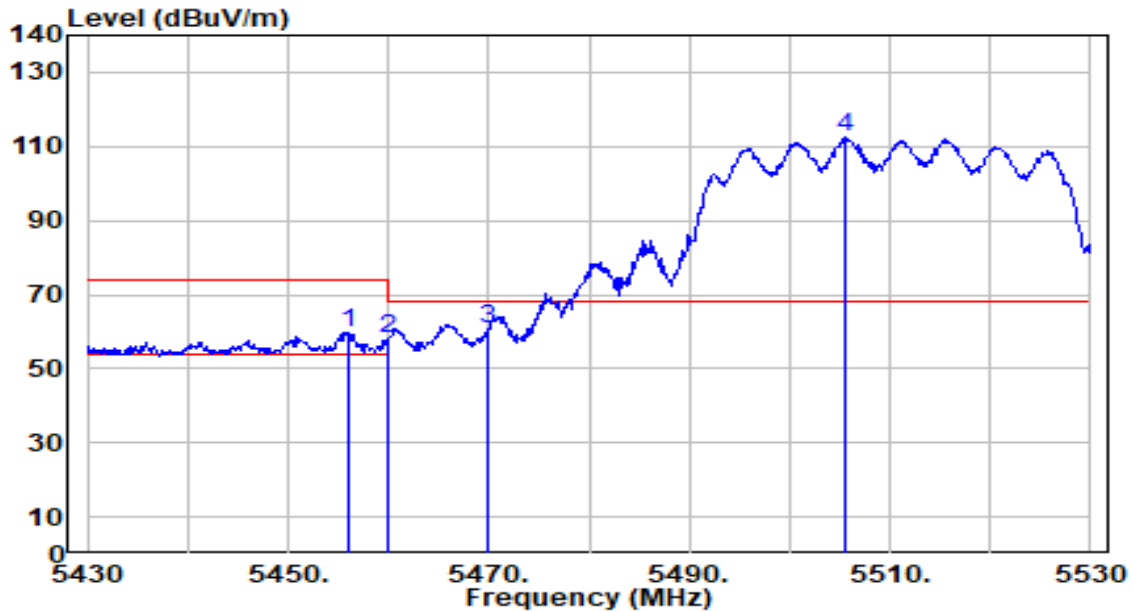


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.000	59.25	0.64	59.90	-14.10	74.00	184	192	Peak
2	5460.000	57.36	0.66	58.02	-15.98	74.00	184	192	Peak
3	* 5470.000	60.14	0.71	60.84	-7.36	68.20	184	192	Peak
4	5505.500	111.49	0.87	112.36	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

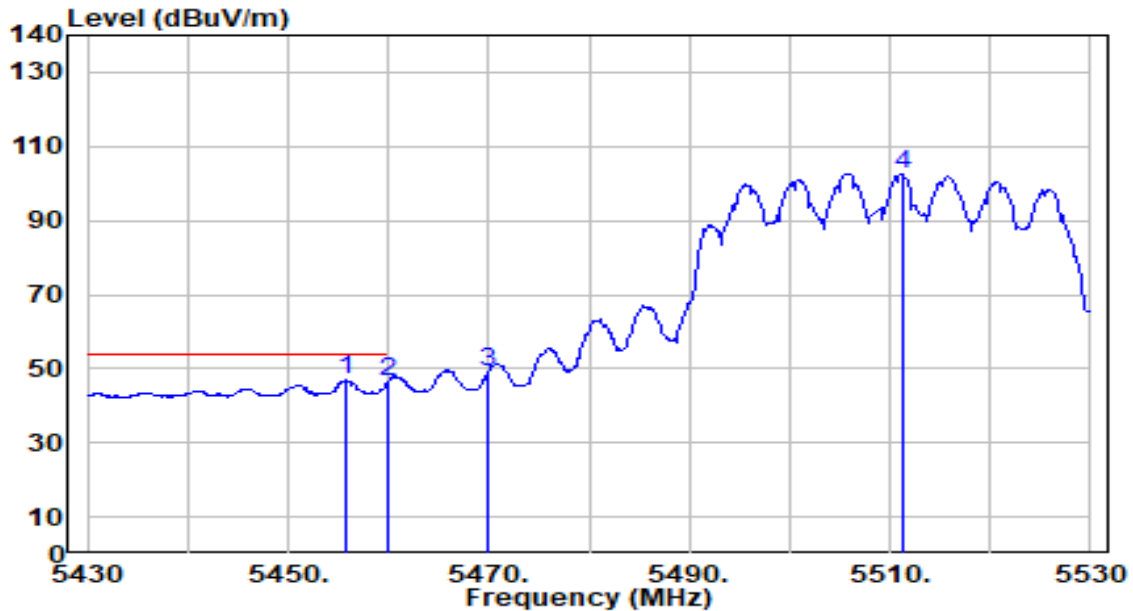


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.800	46.18	0.64	46.82	-7.18	54.00	184	192	Average
2		5460.000	45.93	0.66	46.59	-7.41	54.00	184	192	Average
3		5470.000	48.62	0.71	49.33	N/A	N/A	184	192	Average
4		5511.200	101.86	0.89	102.75	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

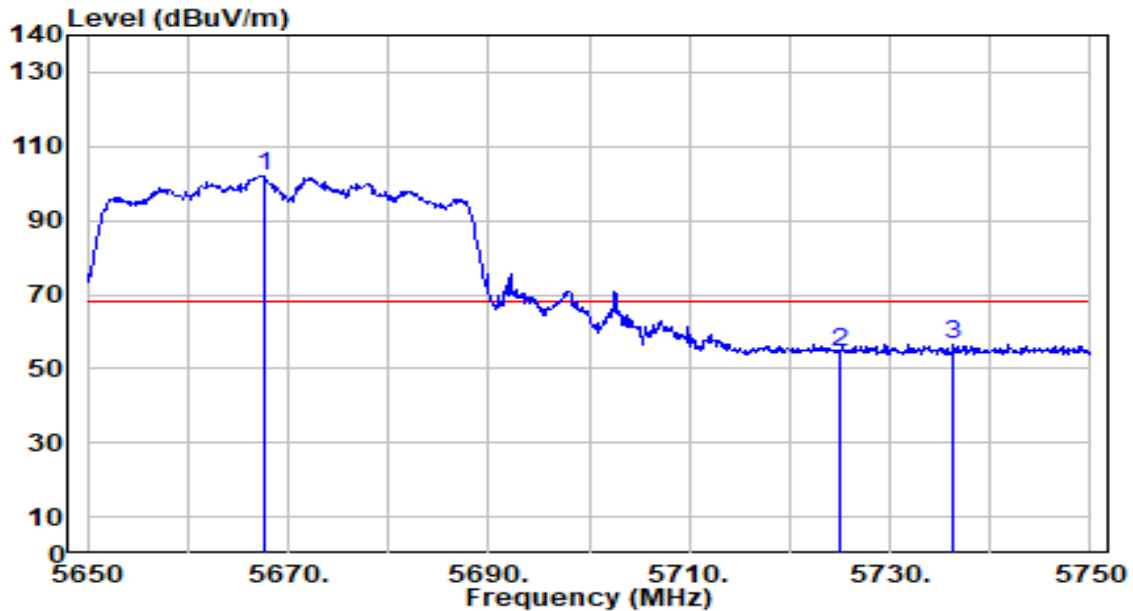


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5667.600	100.27	1.62	101.90	N/A	N/A	174	91	Peak
2	5725.000	52.53	1.89	54.43	-13.77	68.20	174	91	Peak
3	* 5736.300	54.57	1.95	56.52	-11.68	68.20	174	91	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

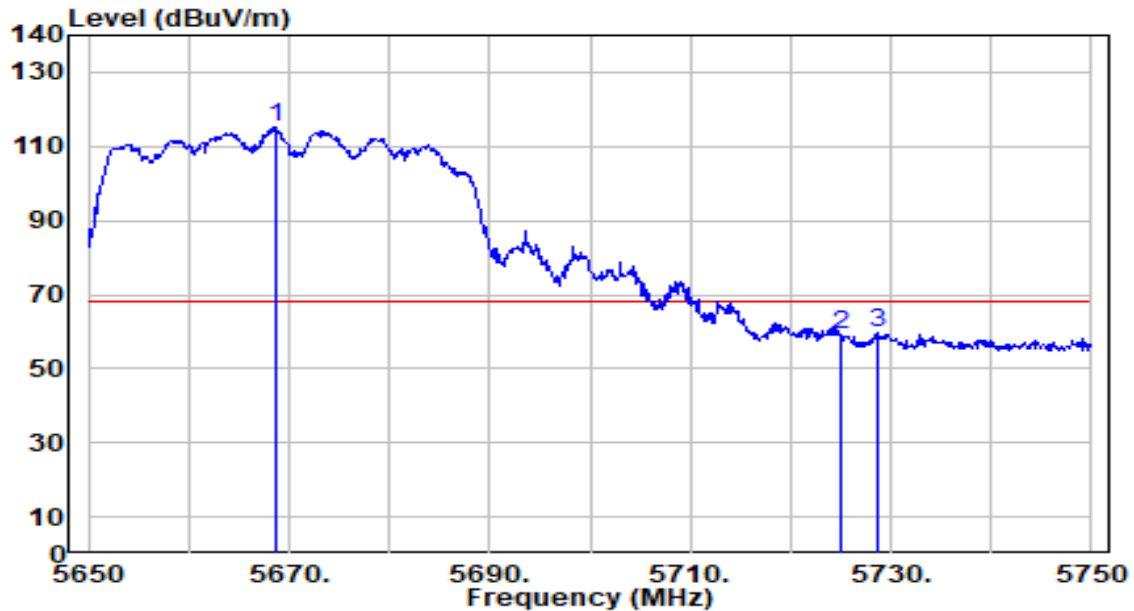


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.600	113.41	1.63	115.03	N/A	N/A	248	186	Peak
2	5725.000	57.12	1.89	59.01	-9.19	68.20	248	186	Peak
3	* 5728.700	57.85	1.91	59.76	-8.44	68.20	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

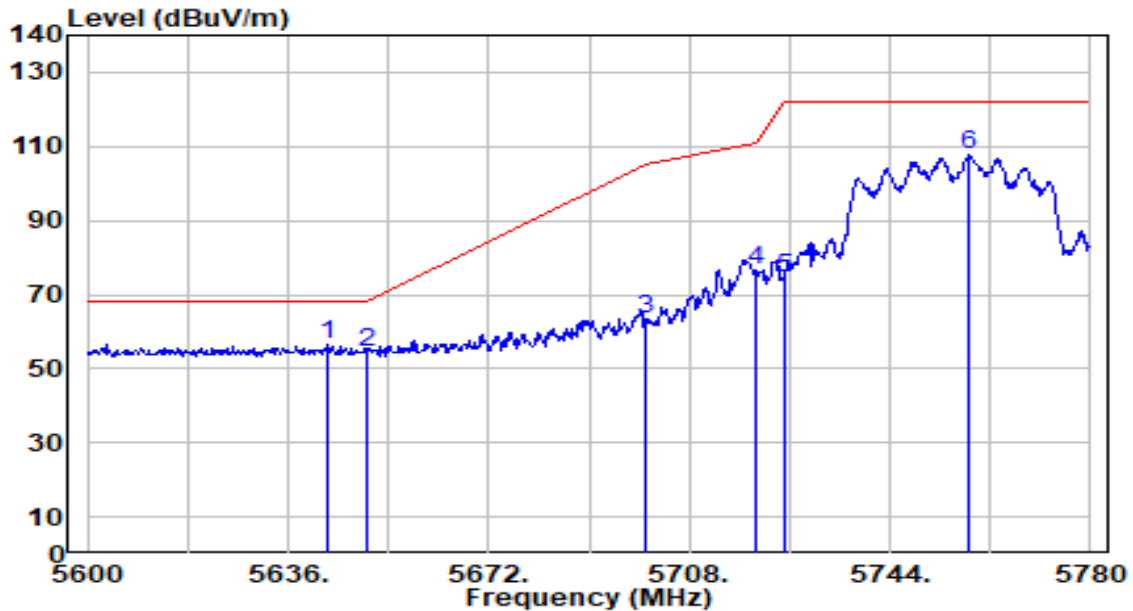


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.200	54.84	1.51	56.35	-11.85	68.20	183	168	Peak
2		5650.000	52.87	1.54	54.41	-13.79	68.20	183	168	Peak
3		5700.000	61.52	1.78	63.30	-41.90	105.20	183	168	Peak
4		5720.000	74.72	1.87	76.59	-34.21	110.80	183	168	Peak
5		5725.000	72.73	1.89	74.62	-47.58	122.20	183	168	Peak
6		5758.220	105.61	2.05	107.66	N/A	N/A	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

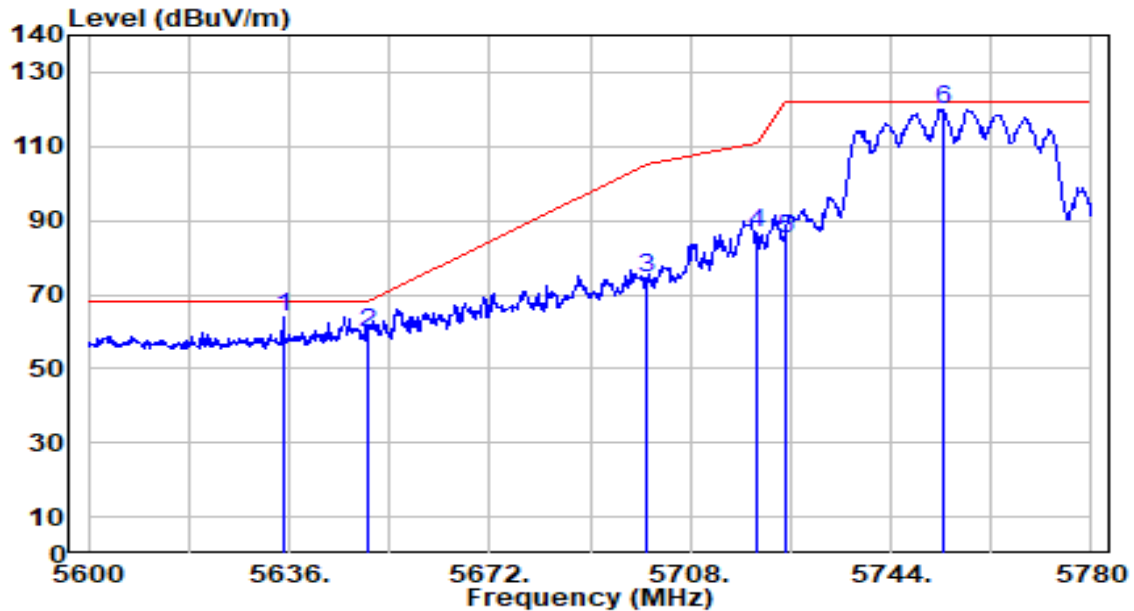


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5635.100	62.60	1.47	64.07	-4.13	68.20	181	156	Peak
2		5650.000	58.28	1.54	59.82	-8.38	68.20	181	156	Peak
3		5700.000	72.57	1.78	74.34	-30.86	105.20	181	156	Peak
4		5720.000	84.67	1.87	86.54	-24.26	110.80	181	156	Peak
5		5725.000	83.05	1.89	84.94	-37.26	122.20	181	156	Peak
6		5753.540	117.89	2.03	119.91	N/A	N/A	181	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

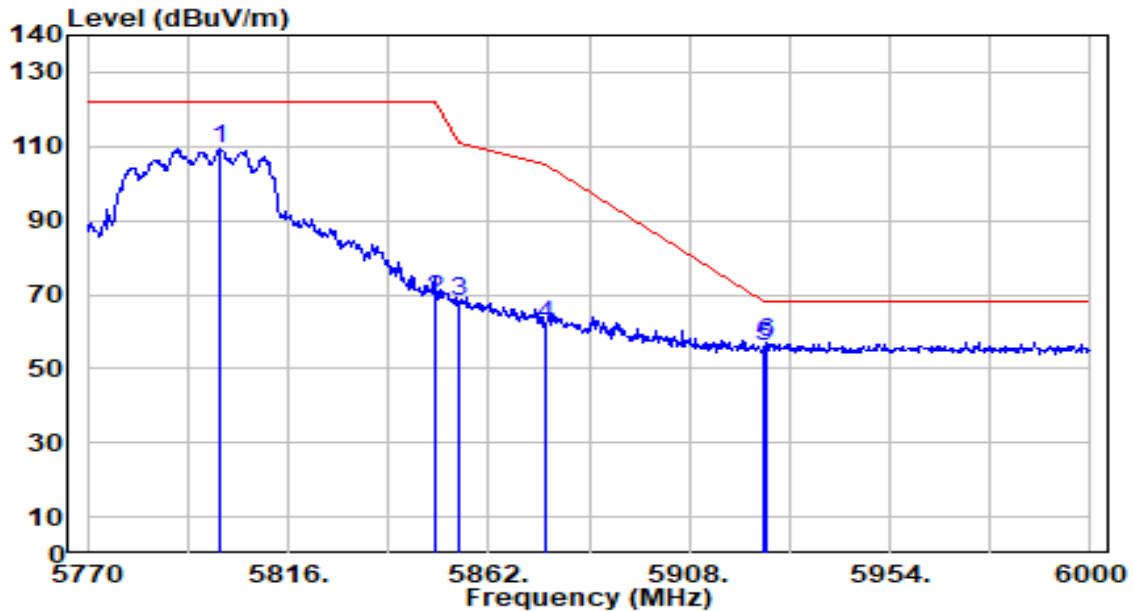


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5800.130	107.08	2.24	109.32	N/A	N/A	315	164	Peak
2	5850.000	66.52	2.25	68.77	-53.43	122.20	315	164	Peak
3	5855.000	65.74	2.25	67.99	-42.81	110.80	315	164	Peak
4	5875.000	59.43	2.26	61.69	-43.51	105.20	315	164	Peak
5	5925.000	53.89	2.27	56.16	-12.04	68.20	315	164	Peak
6	* 5925.940	54.99	2.27	57.26	-10.94	68.20	315	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

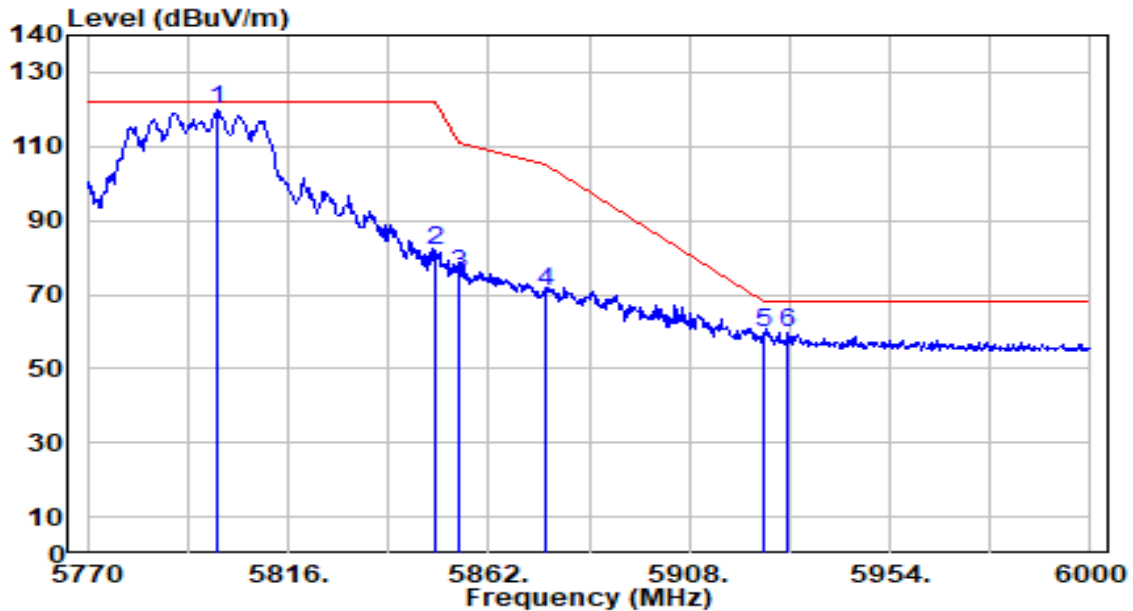


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5799.900	117.67	2.24	119.92	N/A	N/A	115	163	Peak
2	5850.000	79.87	2.25	82.12	-40.08	122.20	115	163	Peak
3	5855.000	73.18	2.25	75.43	-35.37	110.80	115	163	Peak
4	5875.000	68.71	2.26	70.96	-34.24	105.20	115	163	Peak
5	5925.000	57.22	2.27	59.48	-8.72	68.20	115	163	Peak
6	* 5930.540	57.57	2.27	59.84	-8.36	68.20	115	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

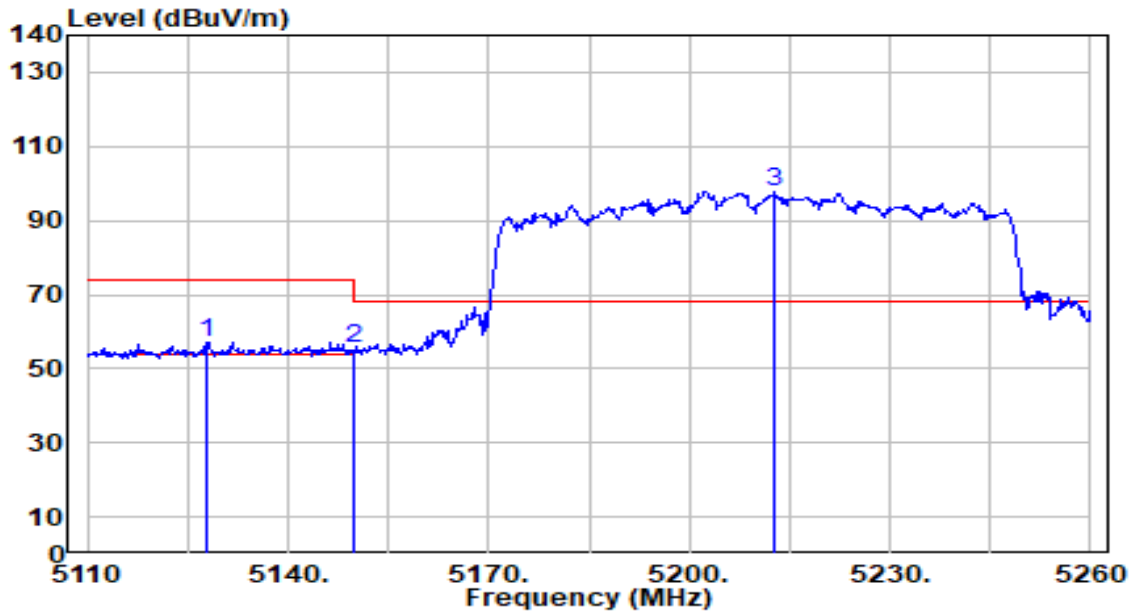


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5128.000	56.56	0.63	57.19	-16.81	74.00	318	197	Peak
2		5150.000	54.88	0.65	55.53	-18.47	74.00	318	197	Peak
3		5212.750	97.25	0.68	97.94	N/A	N/A	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

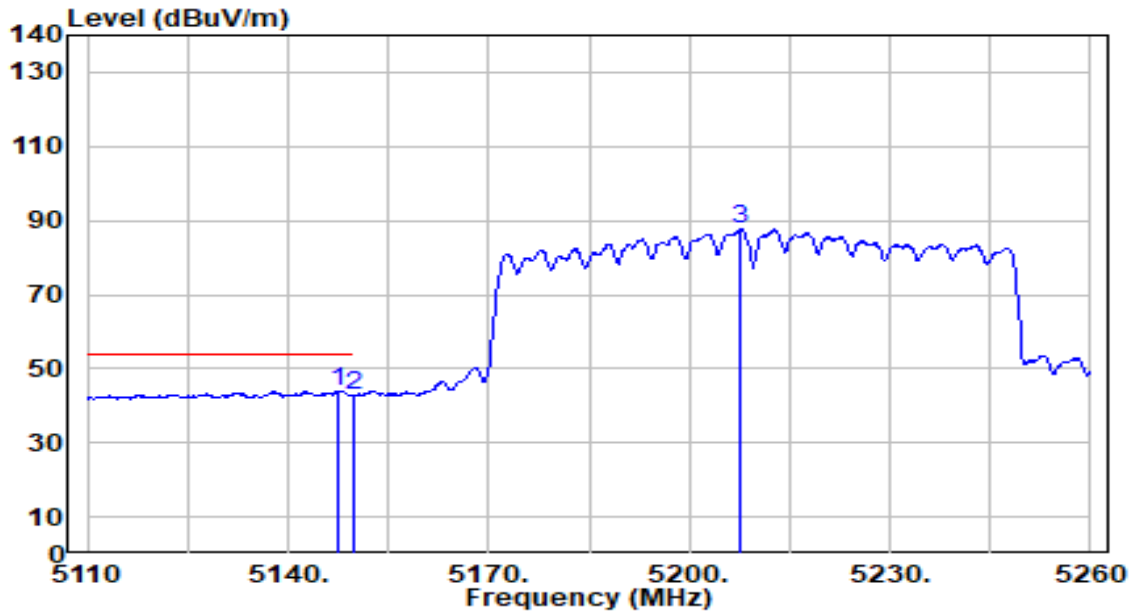


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.650	43.41	0.65	44.06	-9.94	54.00	318	197	Average
2		5150.000	42.32	0.65	42.97	-11.03	54.00	318	197	Average
3		5207.650	86.99	0.69	87.68	N/A	N/A	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

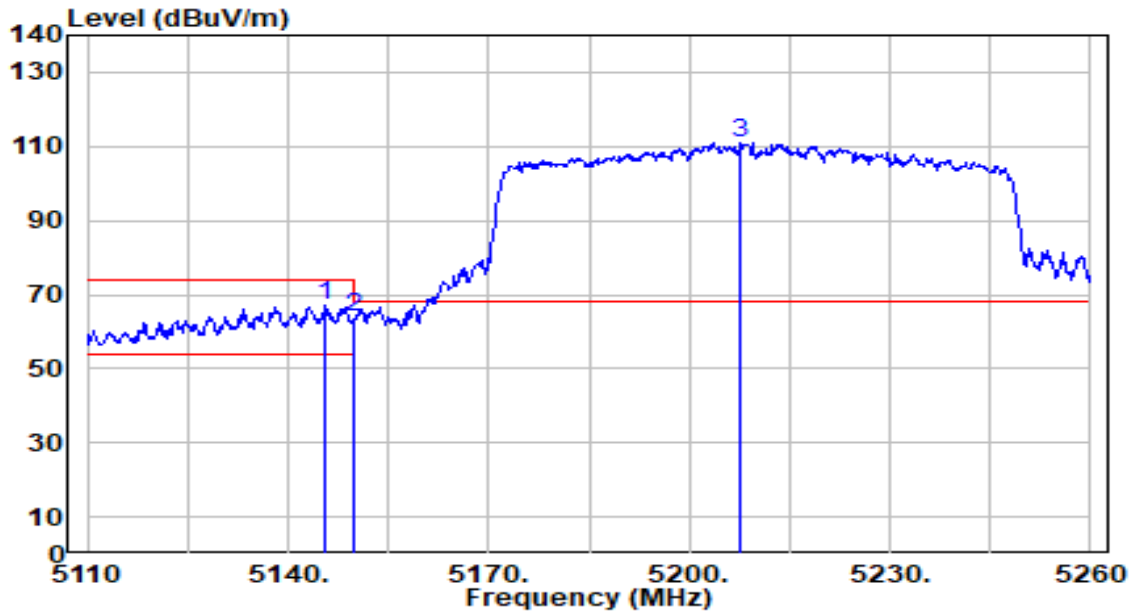


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.700	66.50	0.65	67.15	-6.85	74.00	200	290	Peak
2		5150.000	63.15	0.65	63.81	-10.19	74.00	200	290	Peak
3		5207.650	110.20	0.69	110.89	N/A	N/A	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

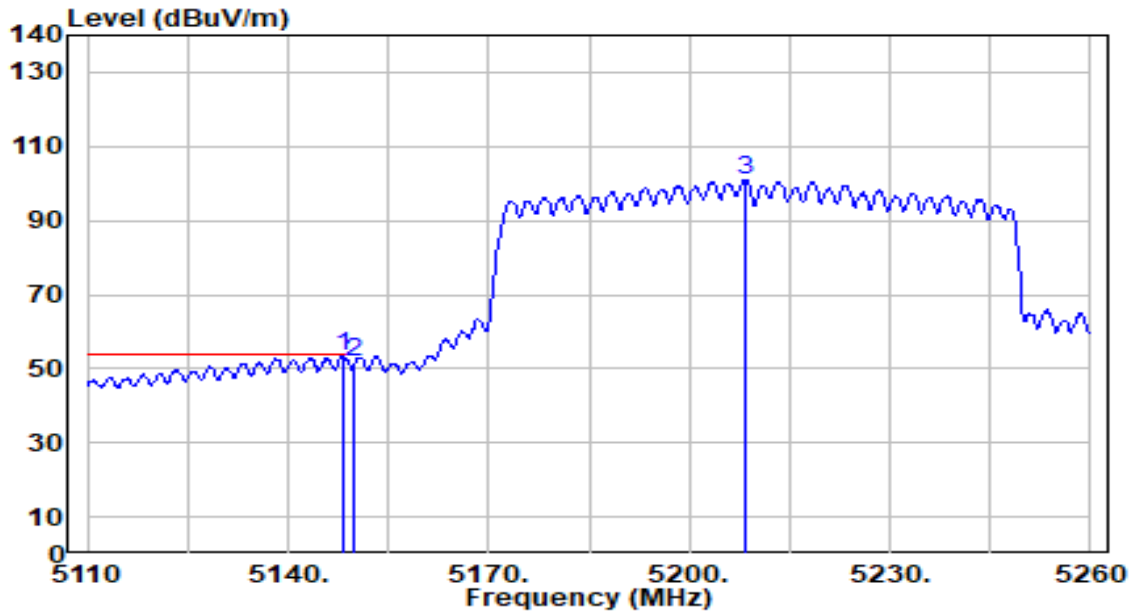


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.400	52.80	0.65	53.46	-0.54	54.00	200	290	Average
2		5150.000	50.87	0.65	51.53	-2.47	54.00	200	290	Average
3		5208.550	100.36	0.69	101.05	N/A	N/A	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

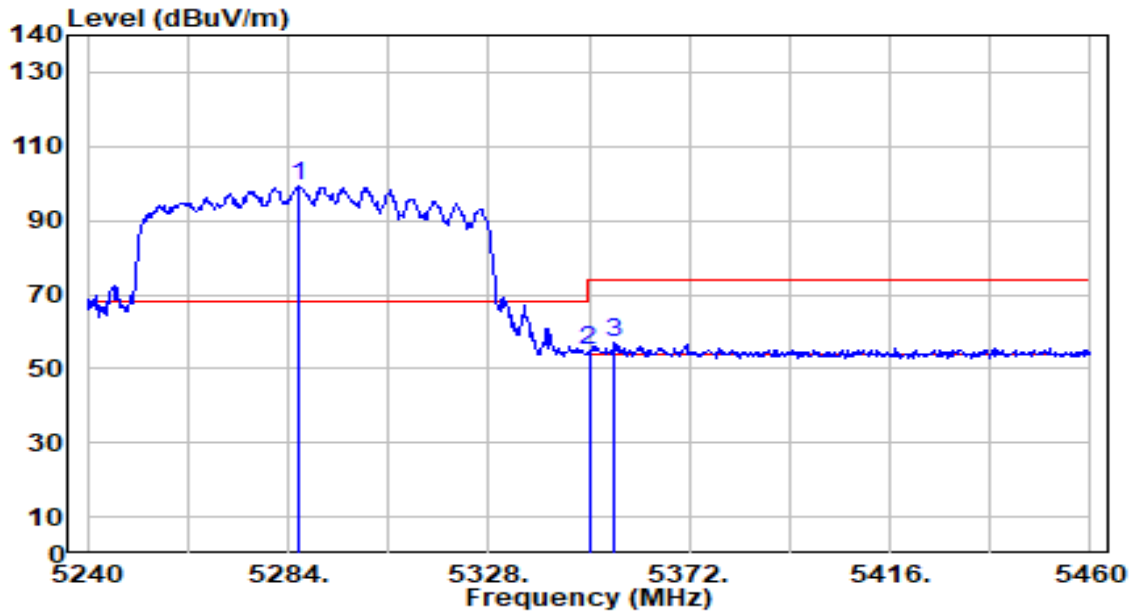


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.420	98.61	0.57	99.18	N/A	N/A	300	186	Peak
2	5350.000	54.43	0.47	54.90	-19.10	74.00	300	186	Peak
3	* 5355.720	56.35	0.46	56.81	-17.19	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

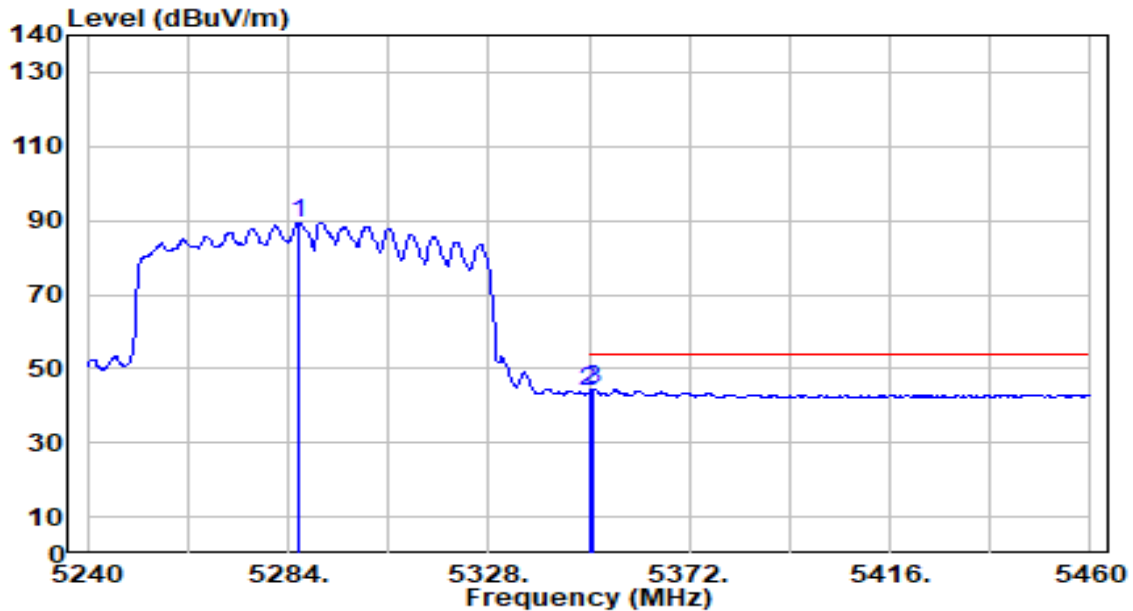


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.200	88.86	0.57	89.43	N/A	N/A	300	186	Average
2	5350.000	43.55	0.47	44.02	-9.98	54.00	300	186	Average
3	* 5350.880	44.17	0.47	44.64	-9.36	54.00	300	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

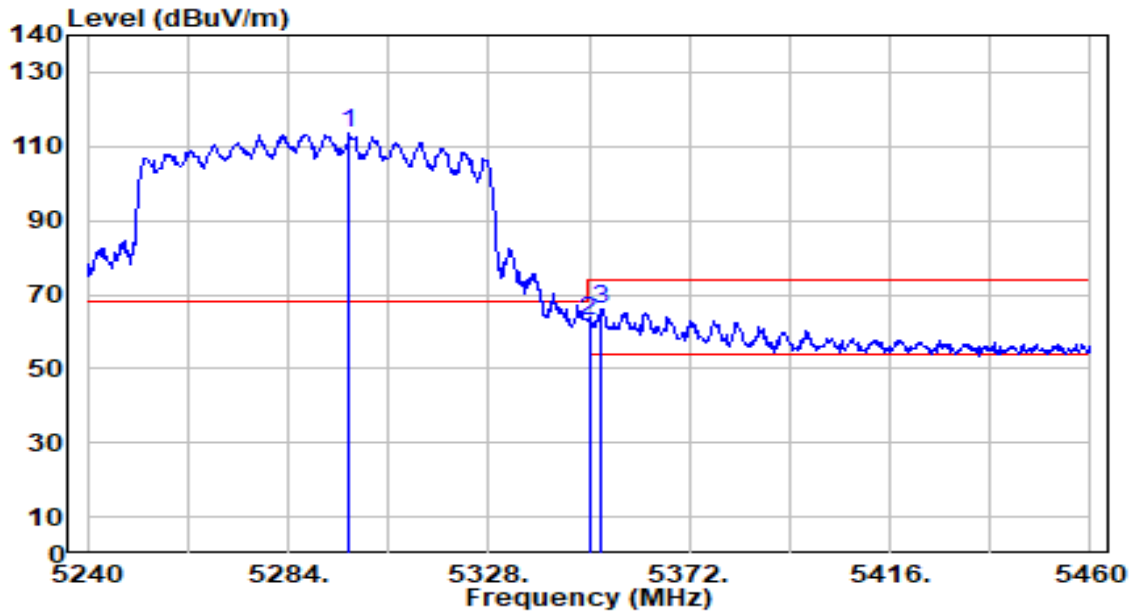


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5297.420	113.27	0.55	113.83	N/A	N/A	200	165	Peak
2	5350.000	62.51	0.47	62.98	-11.02	74.00	200	165	Peak
3	* 5352.640	65.72	0.47	66.19	-7.81	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

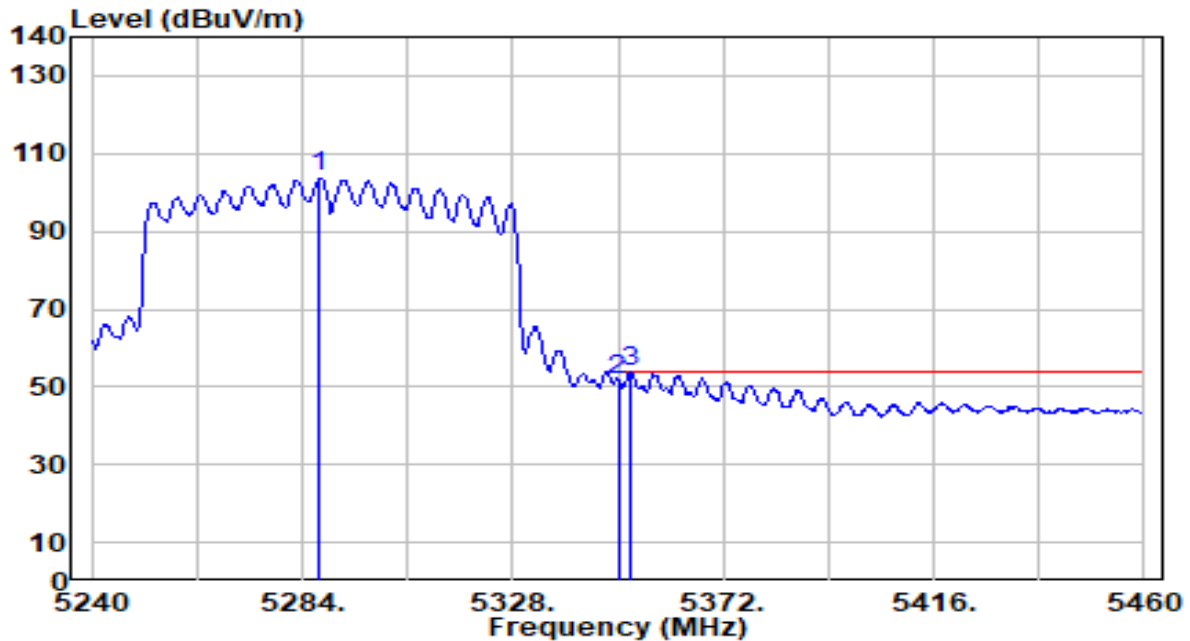


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.740	103.34	0.57	103.91	N/A	N/A	200	165	Average
2	5350.000	51.38	0.47	51.86	-2.14	54.00	200	165	Average
3	* 5352.420	53.40	0.47	53.87	-0.13	54.00	200	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-06
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

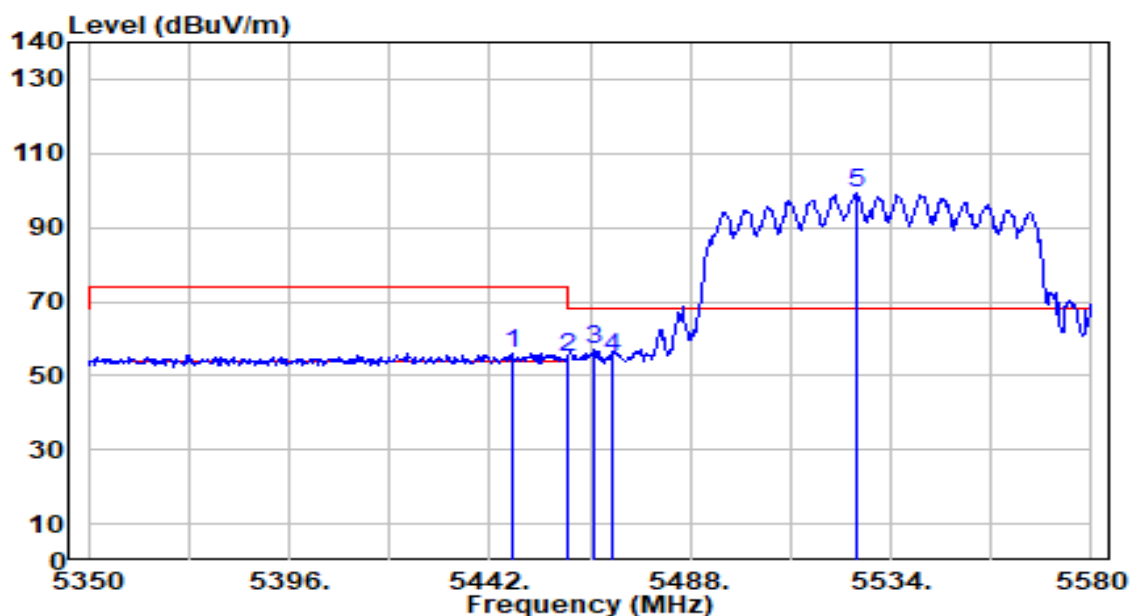


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.520	55.52	0.61	56.13	-17.87	74.00	248	186	Peak
2	5460.000	54.26	0.66	54.92	-19.08	74.00	248	186	Peak
3	* 5465.920	56.13	0.69	56.82	-11.38	68.20	248	186	Peak
4	5470.000	54.21	0.71	54.92	-13.28	68.20	248	186	Peak
5	5525.950	98.14	0.96	99.10	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-06
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

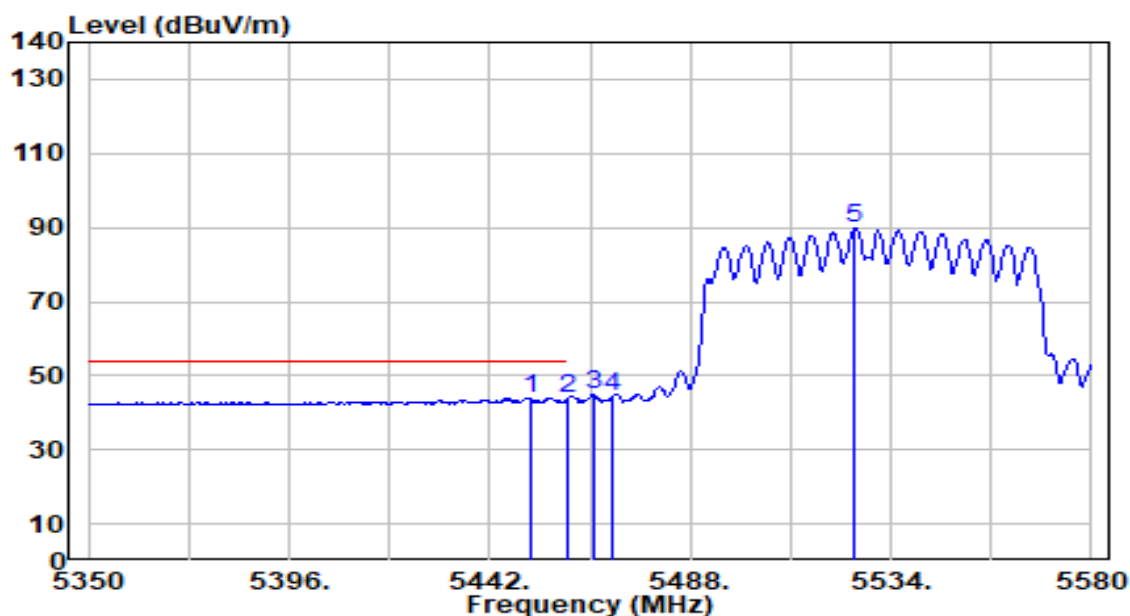


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5451.430	43.37	0.62	43.99	-10.01	54.00	248	186	Average
2		5460.000	43.12	0.66	43.78	-10.22	54.00	248	186	Average
3		5465.920	44.21	0.69	44.89	N/A	N/A	248	186	Average
4		5470.000	43.63	0.71	44.33	N/A	N/A	248	186	Average
5		5525.720	89.01	0.96	89.97	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-06
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

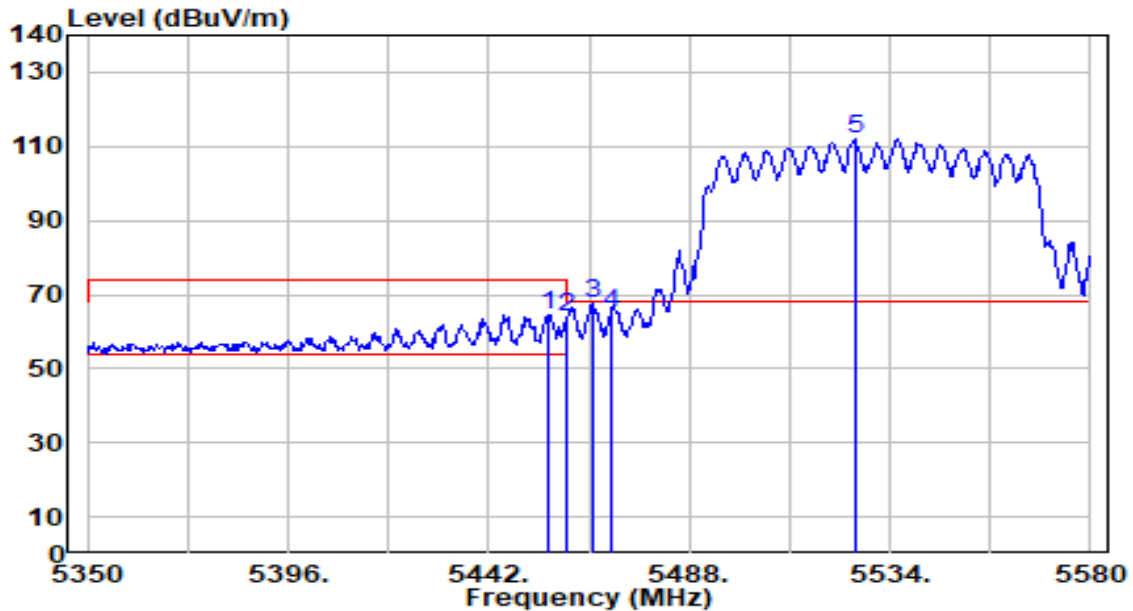


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.800	63.90	0.64	64.54	-9.46	74.00	184	192	Peak
2	5460.000	63.28	0.66	63.95	-10.05	74.00	184	192	Peak
3	* 5465.690	66.68	0.69	67.37	-0.83	68.20	184	192	Peak
4	5470.000	64.40	0.71	65.11	-3.09	68.20	184	192	Peak
5	5525.950	110.87	0.96	111.84	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-06
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

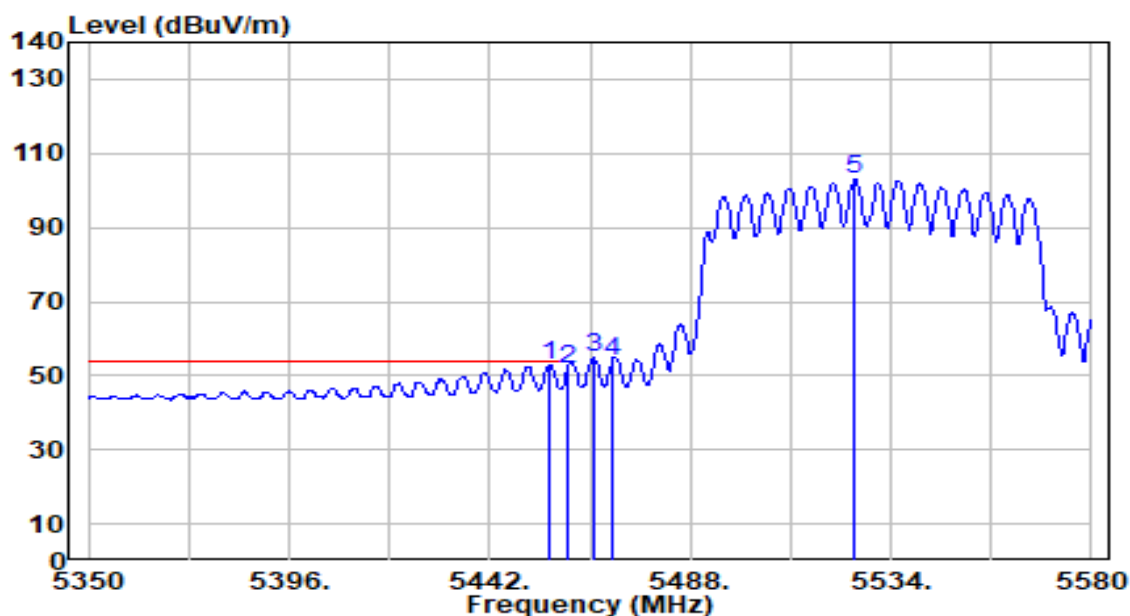


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.800	52.37	0.64	53.01	-0.99	54.00	184	192	Average
2		5460.000	51.34	0.66	52.00	-2.00	54.00	184	192	Average
3		5465.920	54.24	0.69	54.92	N/A	N/A	184	192	Average
4		5470.000	53.11	0.71	53.82	N/A	N/A	184	192	Average
5		5525.720	101.83	0.96	102.79	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

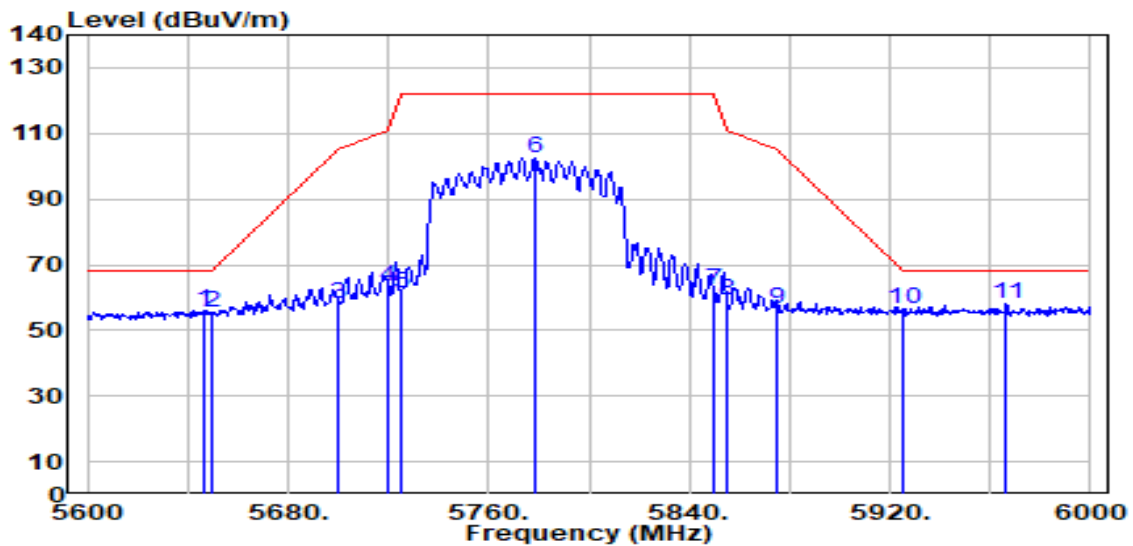


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5646.800	54.35	1.53	55.88	-12.32	68.20	183	168	Peak
2	5650.000	53.90	1.54	55.44	-12.76	68.20	183	168	Peak
3	5700.000	56.56	1.78	58.34	-46.86	105.20	183	168	Peak
4	5720.000	61.72	1.87	63.59	-47.21	110.80	183	168	Peak
5	5725.000	59.41	1.89	61.31	-60.89	122.20	183	168	Peak
6	5778.400	100.61	2.14	102.75	N/A	N/A	183	168	Peak
7	5850.000	60.13	2.25	62.38	-59.82	122.20	183	168	Peak
8	5855.000	56.82	2.25	59.08	-51.72	110.80	183	168	Peak
9	5875.000	54.29	2.26	56.54	-48.66	105.20	183	168	Peak
10	5925.000	54.12	2.27	56.39	-11.81	68.20	183	168	Peak
11	* 5966.400	55.72	2.27	58.00	-10.20	68.20	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

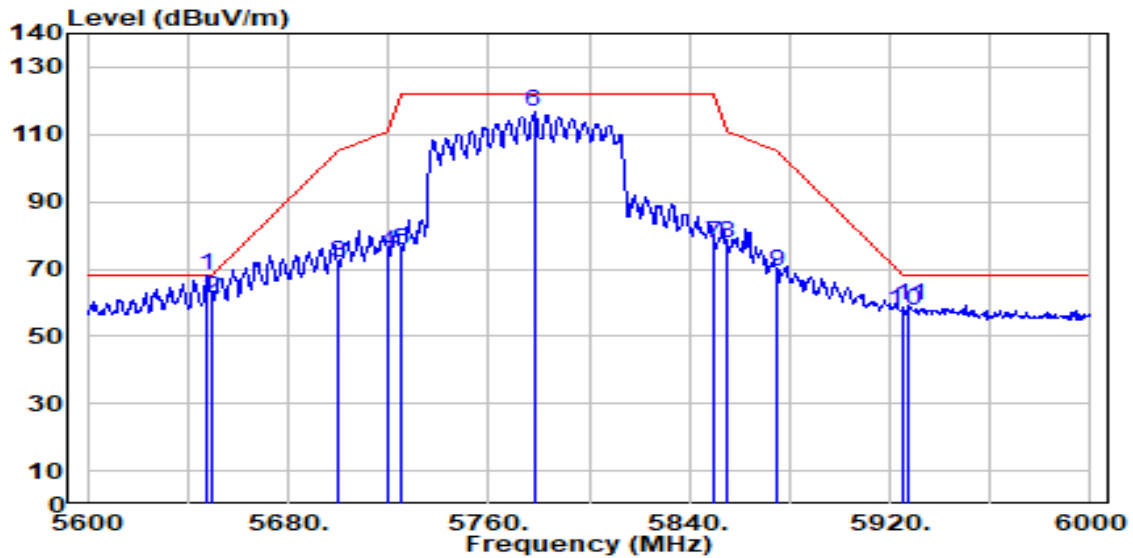


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.000	66.37	1.53	67.90	-0.30	68.20	181	156	Peak
2		5650.000	59.81	1.54	61.35	-6.85	68.20	181	156	Peak
3		5700.000	70.10	1.78	71.88	-33.32	105.20	181	156	Peak
4		5720.000	72.90	1.87	74.77	-36.03	110.80	181	156	Peak
5		5725.000	73.77	1.89	75.67	-46.53	122.20	181	156	Peak
6		5778.000	114.67	2.14	116.81	N/A	N/A	181	156	Peak
7		5850.000	75.48	2.25	77.73	-44.47	122.20	181	156	Peak
8		5855.000	75.60	2.25	77.85	-32.95	110.80	181	156	Peak
9		5875.000	66.74	2.26	69.00	-36.20	105.20	181	156	Peak
10		5925.000	55.55	2.27	57.81	-10.39	68.20	181	156	Peak
11		5927.600	57.06	2.27	59.33	-8.87	68.20	181	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

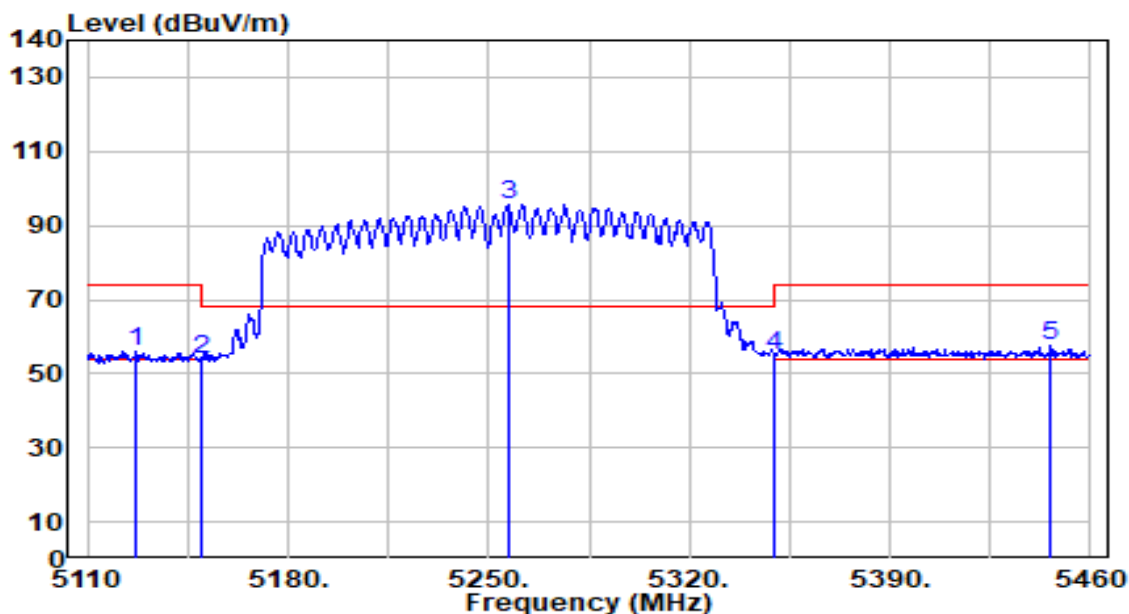


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5126.800	55.33	0.63	55.97	-18.03	74.00	318	197	Peak
2	5150.000	53.12	0.65	53.78	-20.22	74.00	318	197	Peak
3	5256.650	94.93	0.61	95.54	N/A	N/A	318	197	Peak
4	5350.000	54.62	0.47	55.09	-18.91	74.00	318	197	Peak
5	* 5446.000	57.16	0.60	57.75	-16.25	74.00	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

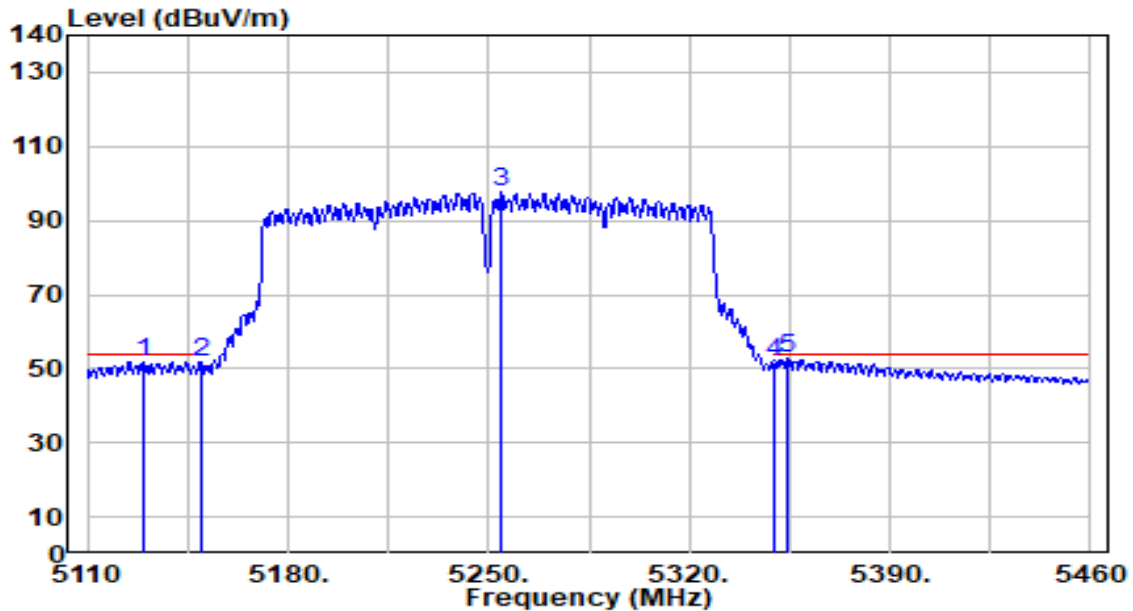


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5129.950	51.28	0.63	51.91	-2.09	54.00	200	290	Average
2	5150.000	50.90	0.65	51.56	-2.44	54.00	200	290	Average
3	5254.550	97.24	0.62	97.86	N/A	N/A	200	290	Average
4	5350.000	51.25	0.47	51.73	-2.27	54.00	200	290	Average
5	* 5354.300	52.36	0.46	52.83	-1.17	54.00	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

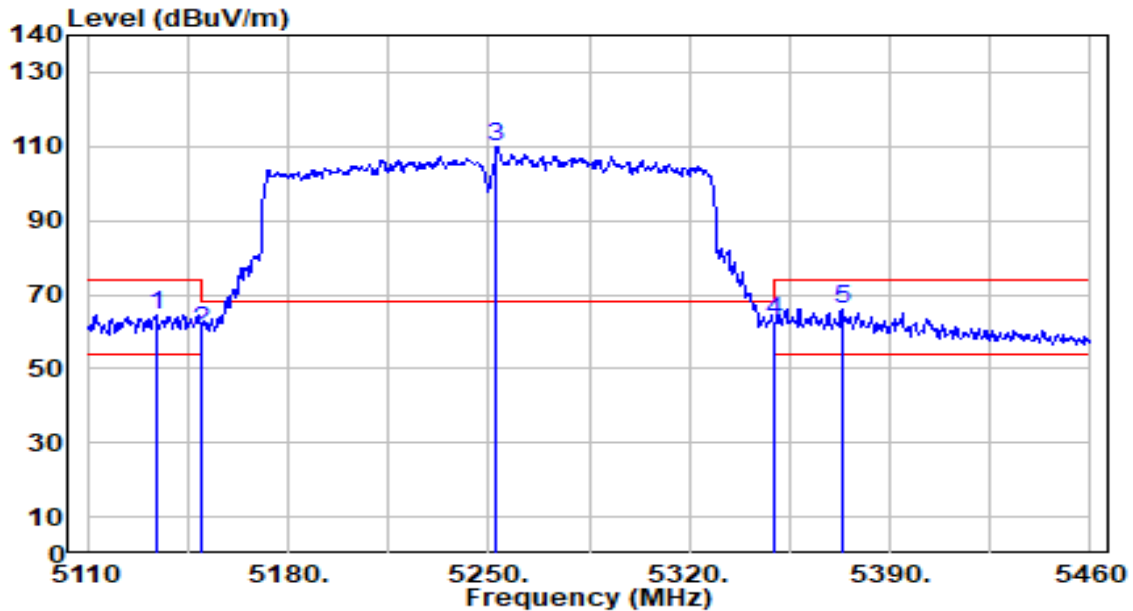


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.800	63.86	0.64	64.50	-9.50	74.00	200	290	Peak
2	5150.000	59.74	0.65	60.39	-13.61	74.00	200	290	Peak
3	5252.800	109.17	0.62	109.79	N/A	N/A	200	290	Peak
4	5350.000	62.25	0.47	62.72	-11.28	74.00	200	290	Peak
5	* 5373.200	65.60	0.44	66.03	-7.97	74.00	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

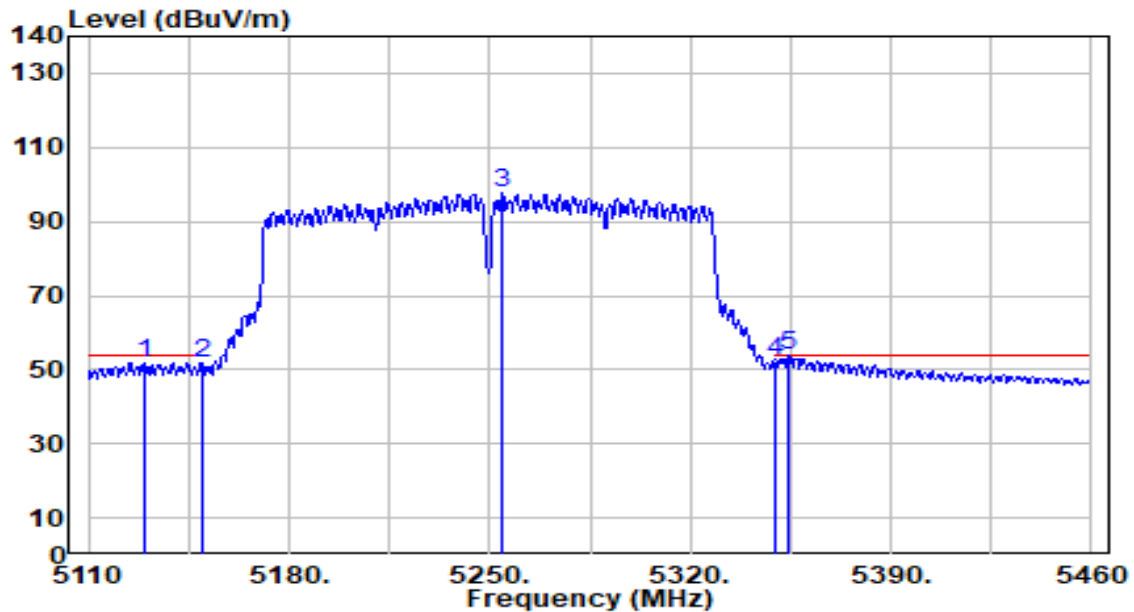


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5129.950	51.28	0.63	51.91	-2.09	54.00	200	290	Average
2	5150.000	50.90	0.65	51.56	-2.44	54.00	200	290	Average
3	5254.550	97.24	0.62	97.86	N/A	N/A	200	290	Average
4	5350.000	51.75	0.47	52.23	-1.77	54.00	200	290	Average
5	* 5354.300	53.36	0.46	53.83	-0.17	54.00	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

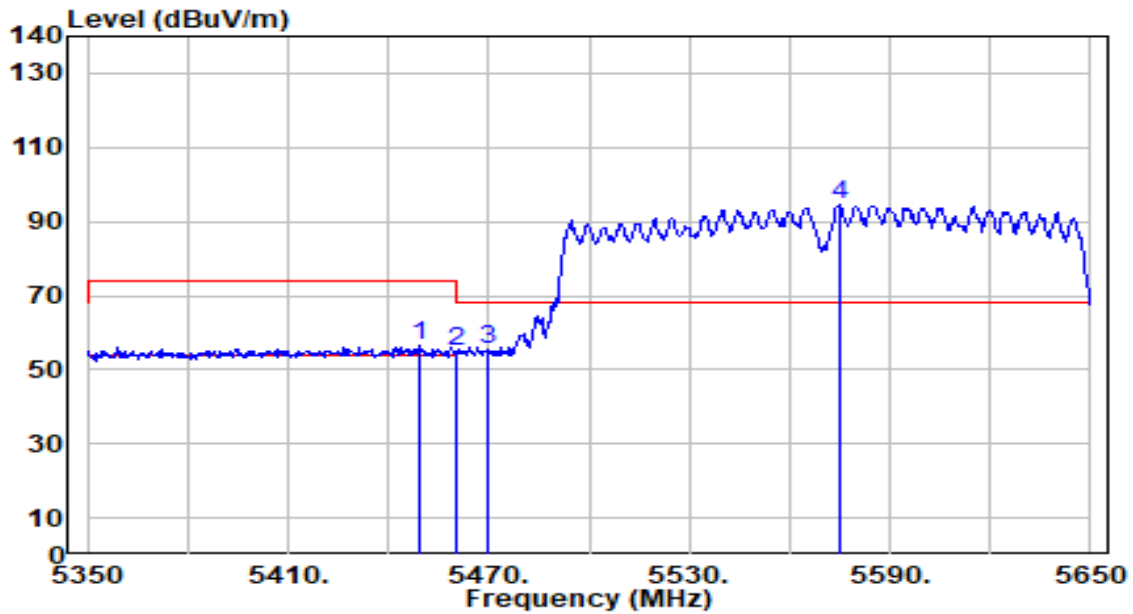


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5449.300	55.80	0.61	56.41	-17.59	74.00	248	186	Peak
2	5460.000	54.31	0.66	54.97	-19.03	74.00	248	186	Peak
3	* 5470.000	54.53	0.71	55.23	-12.97	68.20	248	186	Peak
4	5575.300	93.60	1.19	94.79	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

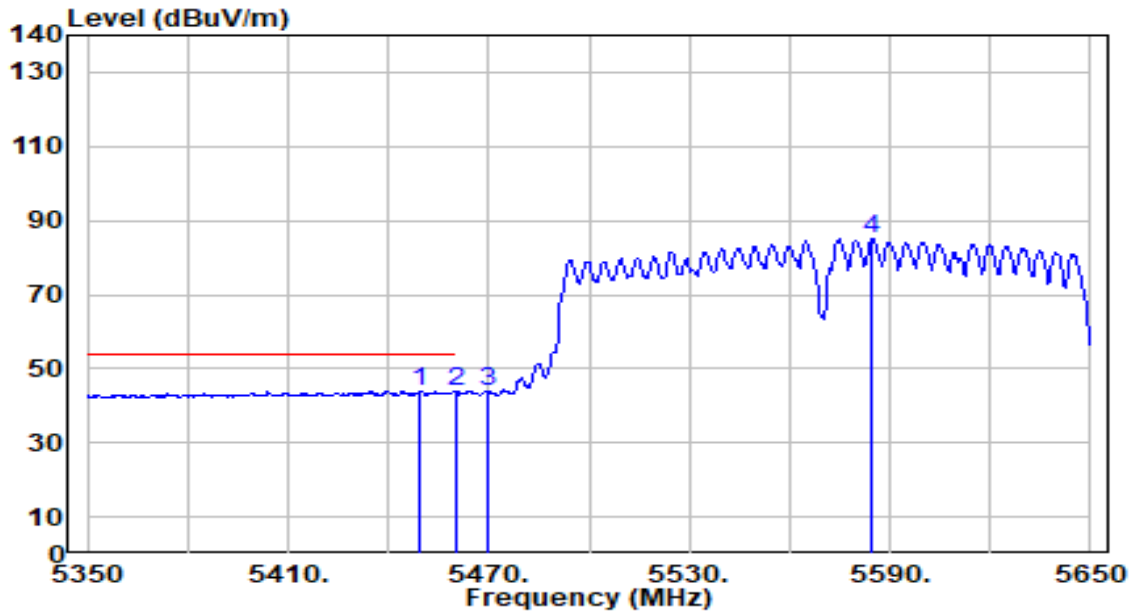


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5449.600	43.32	0.62	43.94	-10.06	54.00	248	186	Average
2		5460.000	42.95	0.66	43.61	-10.39	54.00	248	186	Average
3		5470.000	42.98	0.71	43.68	N/A	N/A	248	186	Average
4		5584.600	83.68	1.24	84.92	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

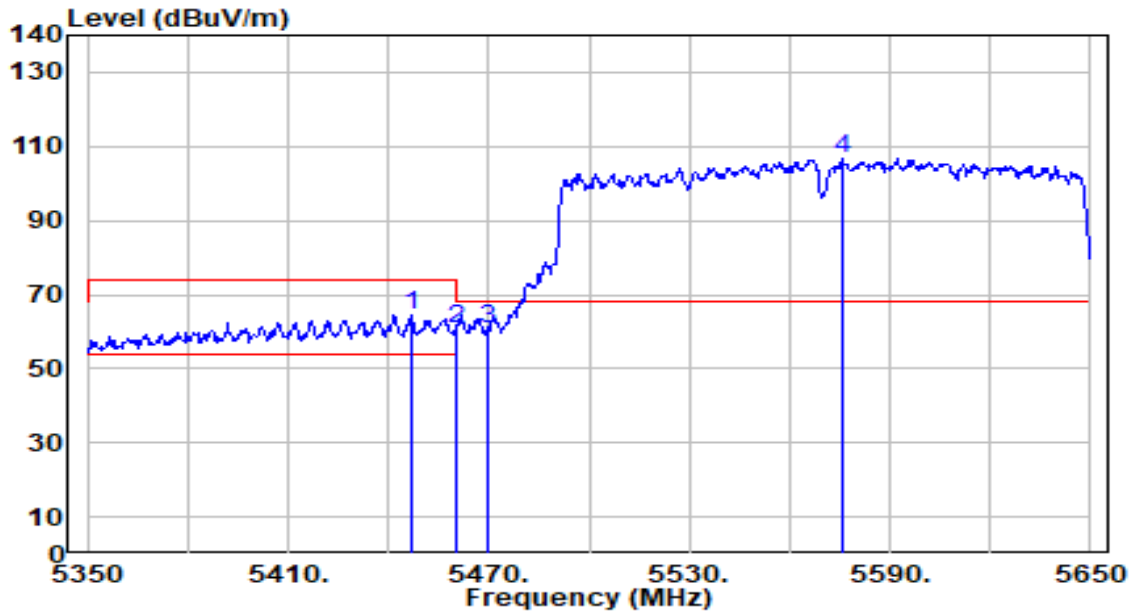


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5446.600	63.84	0.60	64.44	-9.56	74.00	184	192	Peak
2	5460.000	59.89	0.66	60.55	-13.45	74.00	184	192	Peak
3	* 5470.000	60.15	0.71	60.86	-7.34	68.20	184	192	Peak
4	5575.600	105.72	1.19	106.91	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

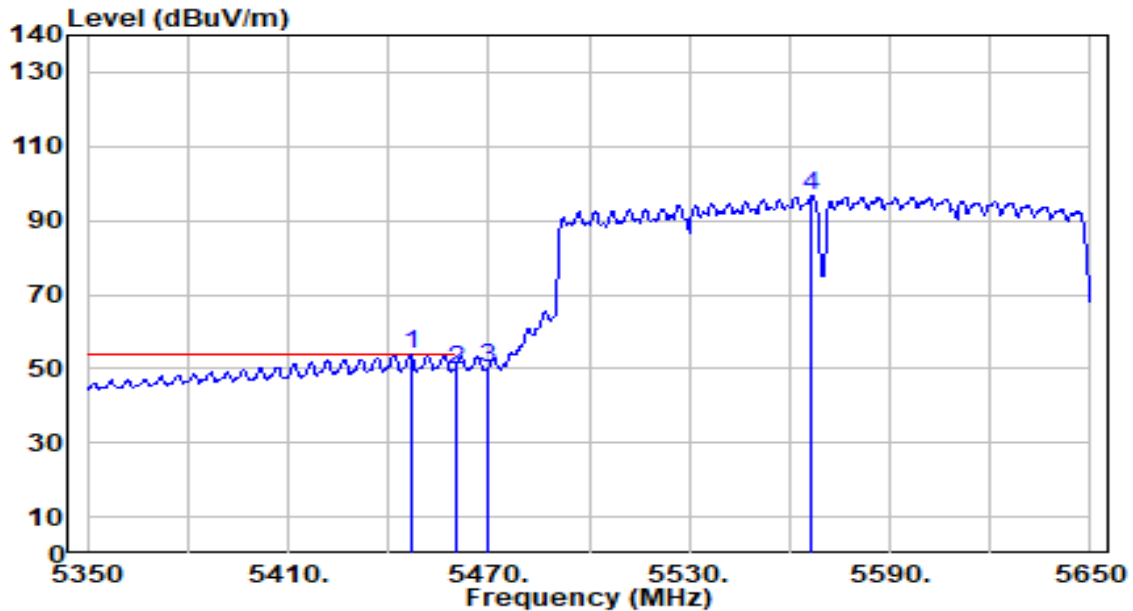


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5446.600	53.21	0.60	53.81	-0.19	54.00	184	192	Average
2		5460.000	49.26	0.66	49.92	-4.08	54.00	184	192	Average
3		5470.000	49.50	0.71	50.21	N/A	N/A	184	192	Average
4		5566.600	95.68	1.15	96.83	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

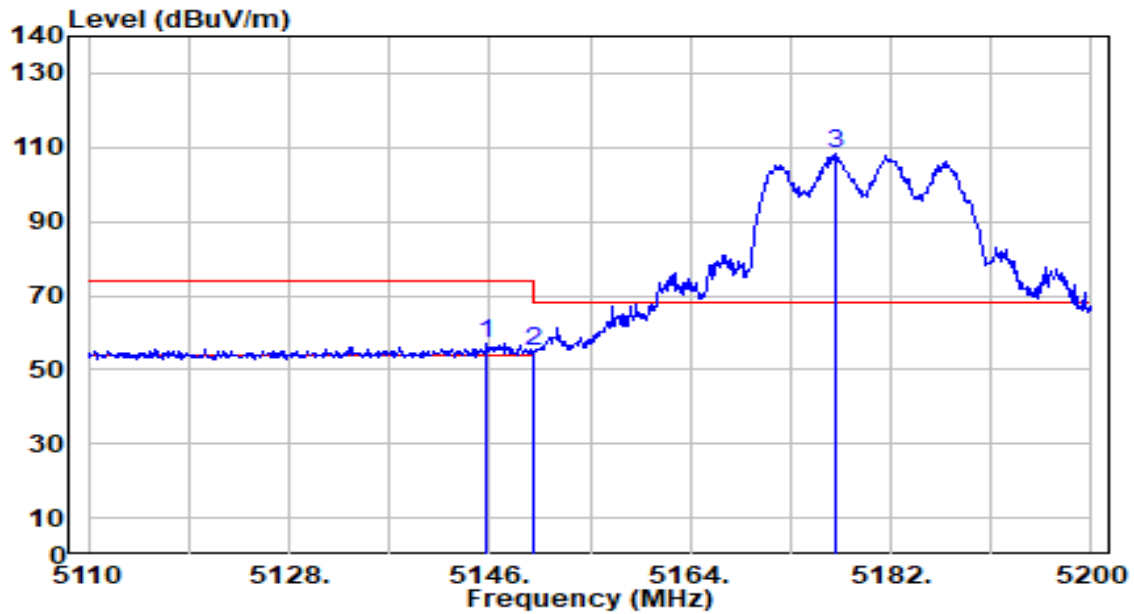


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.730	56.39	0.65	57.04	-16.96	74.00	318	197	Peak
2		5150.000	54.34	0.65	55.00	-19.00	74.00	318	197	Peak
3		5177.050	107.54	0.68	108.22	N/A	N/A	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

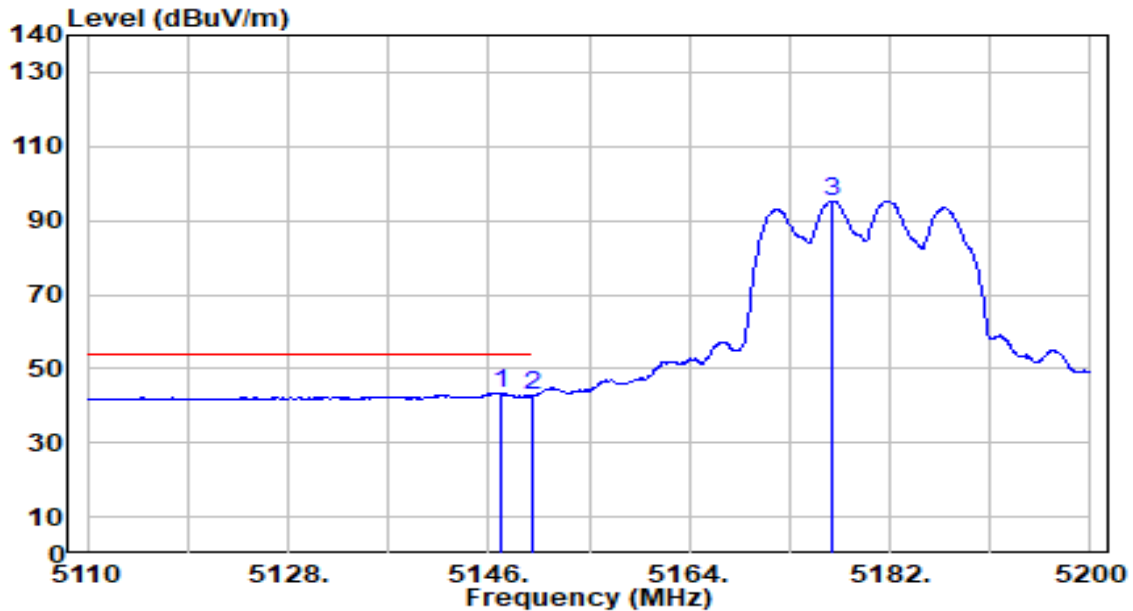


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.170	42.84	0.65	43.49	-10.51	54.00	318	197	Average
2		5150.000	42.11	0.65	42.77	-11.23	54.00	318	197	Average
3		5176.780	94.60	0.68	95.28	N/A	N/A	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

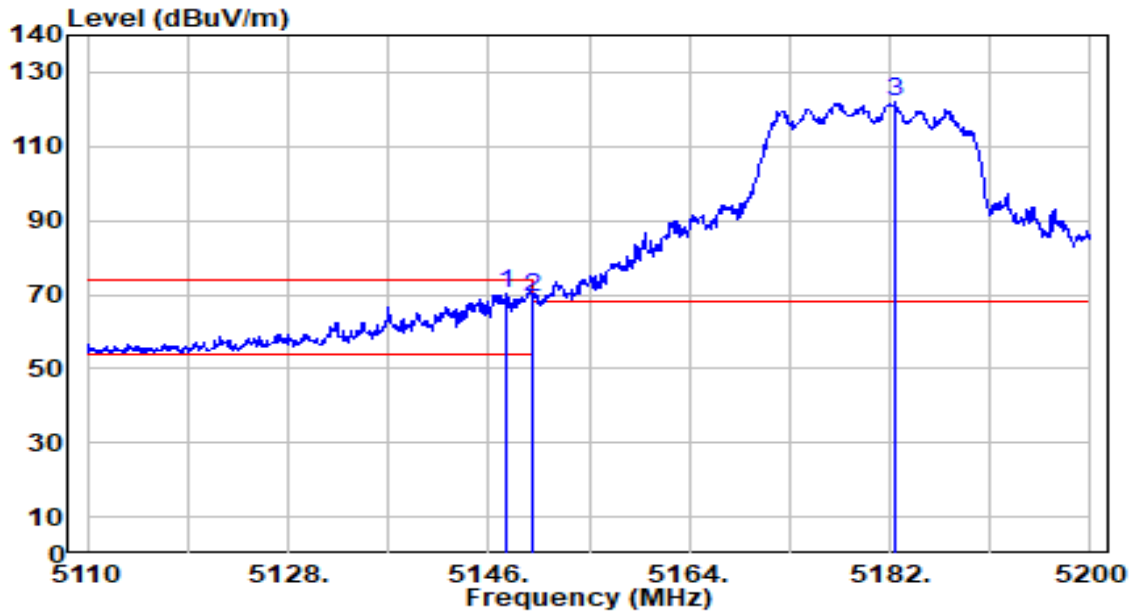


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.620	69.43	0.65	70.09	-3.91	74.00	200	290	Peak
2		5150.000	68.49	0.65	69.14	-4.86	74.00	200	290	Peak
3		5182.540	121.22	0.69	121.90	N/A	N/A	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

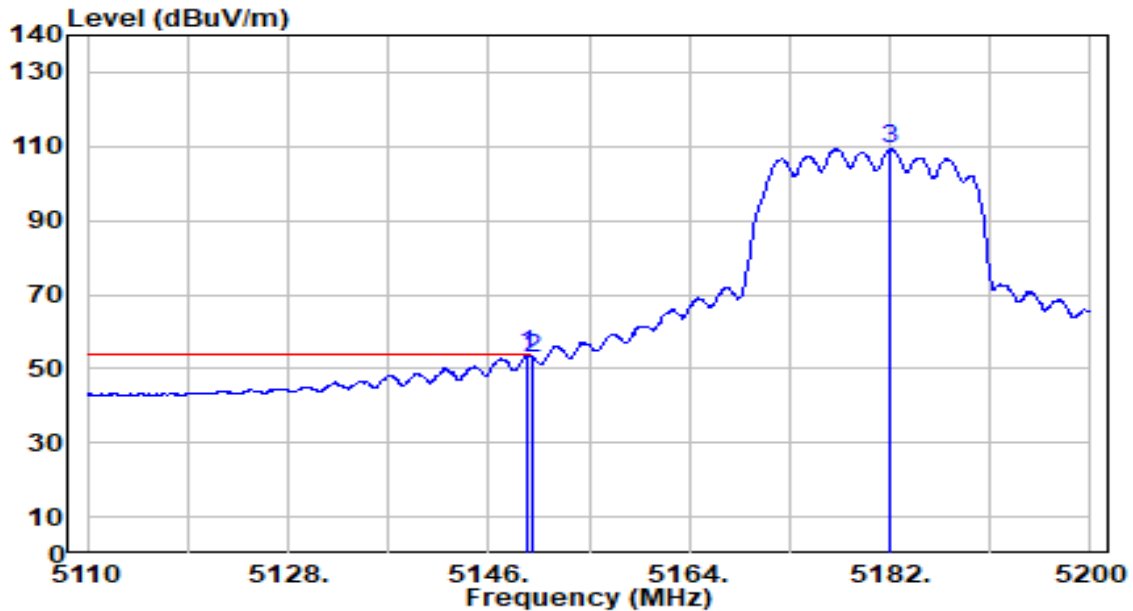


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	53.11	0.65	53.76	-0.24	54.00	200	290	Average
2		5150.000	52.43	0.65	53.08	-0.92	54.00	200	290	Average
3		5182.090	108.52	0.68	109.20	N/A	N/A	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

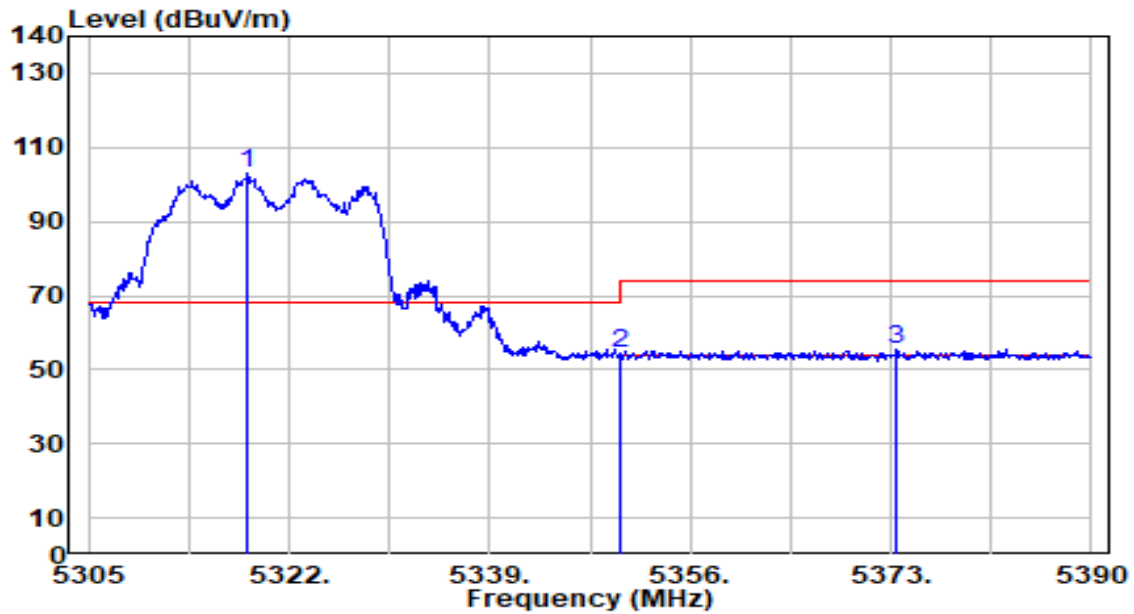


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.515	102.61	0.52	103.13	N/A	N/A	300	186	Peak
2	5350.000	53.94	0.47	54.41	-19.59	74.00	300	186	Peak
3	* 5373.510	54.95	0.43	55.38	-18.62	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

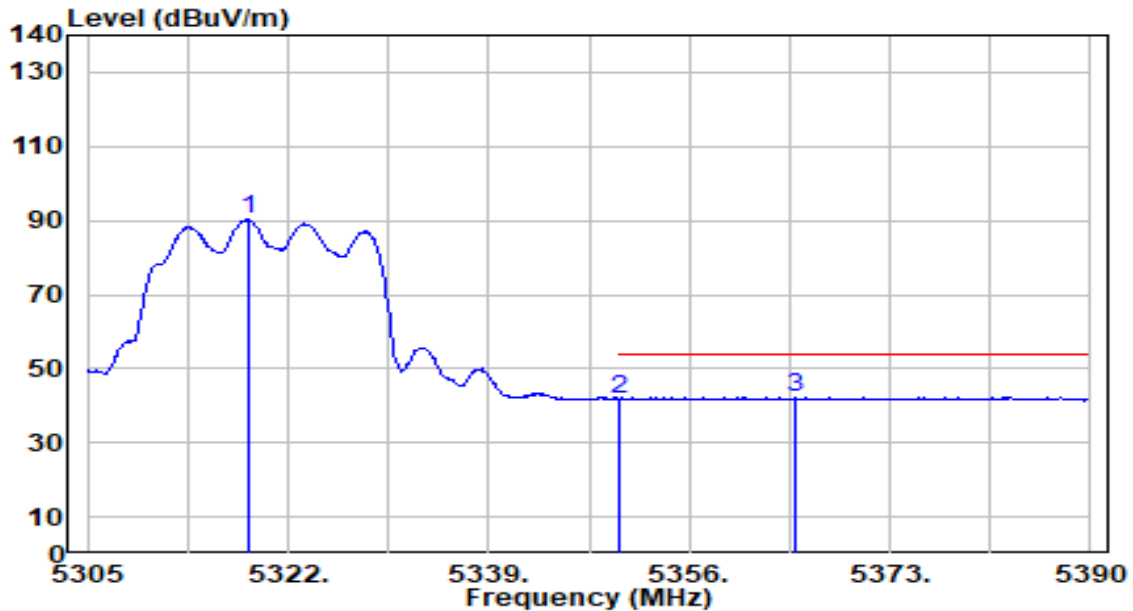


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.600	89.69	0.52	90.21	N/A	N/A	300	186	Average
2	5350.000	41.26	0.47	41.73	-12.27	54.00	300	186	Average
3	* 5364.925	41.75	0.45	42.19	-11.81	54.00	300	186	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

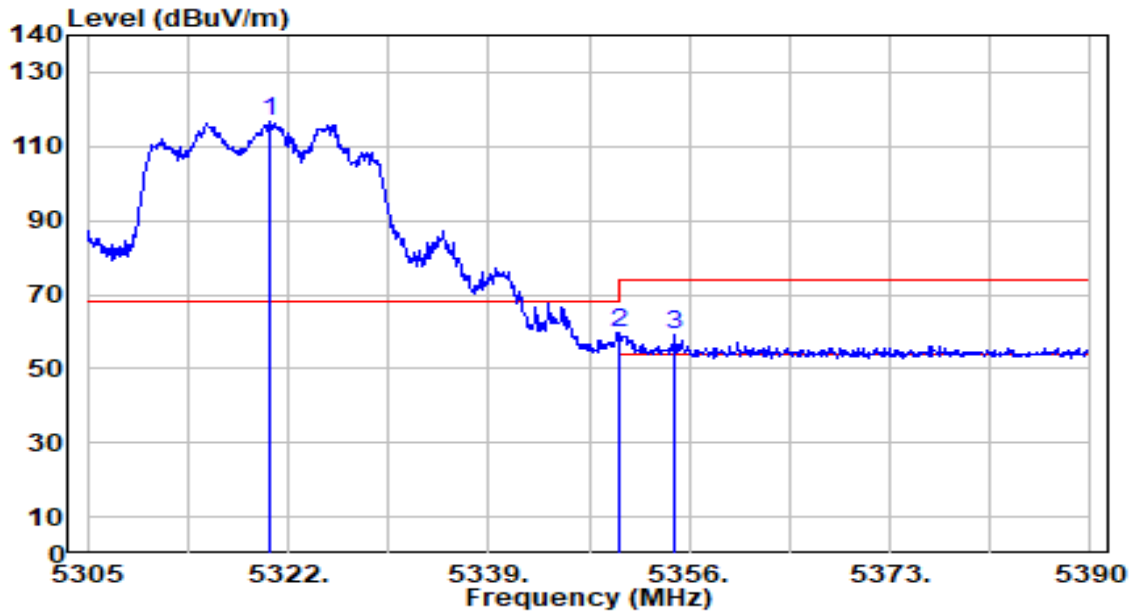


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.385	116.16	0.52	116.68	N/A	N/A	200	165	Peak
2	* 5350.000	59.03	0.47	59.50	-14.50	74.00	200	165	Peak
3	5354.810	58.73	0.46	59.19	-14.81	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

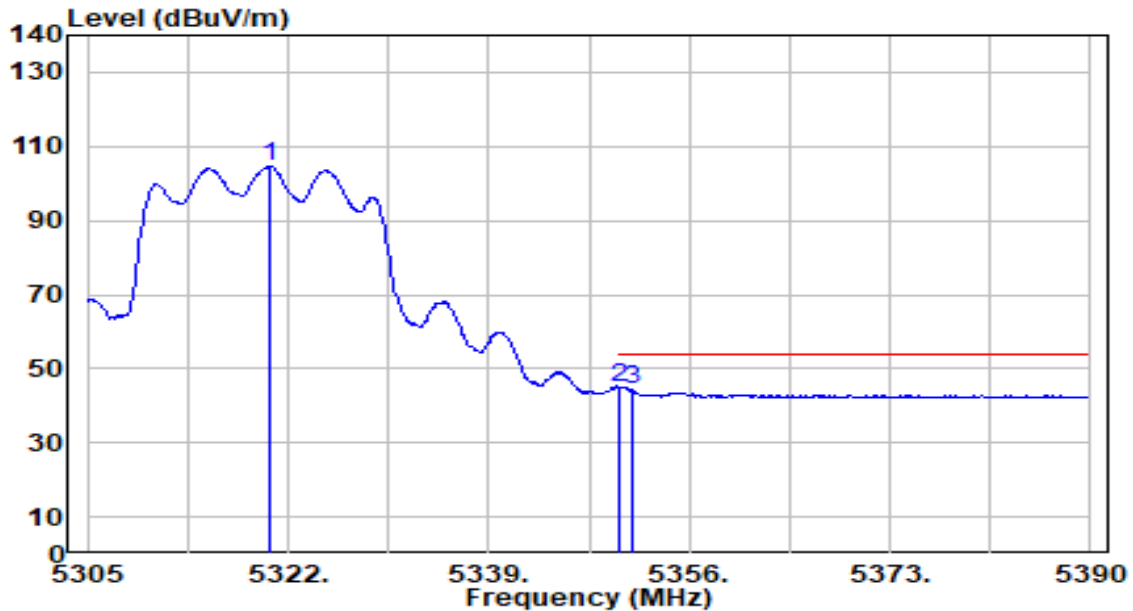


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5320.470	104.02	0.52	104.53	N/A	N/A	200	165	Average
2	*	5350.000	44.57	0.47	45.04	-8.96	54.00	200	165	Average
3		5351.155	43.70	0.47	44.17	-9.83	54.00	200	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

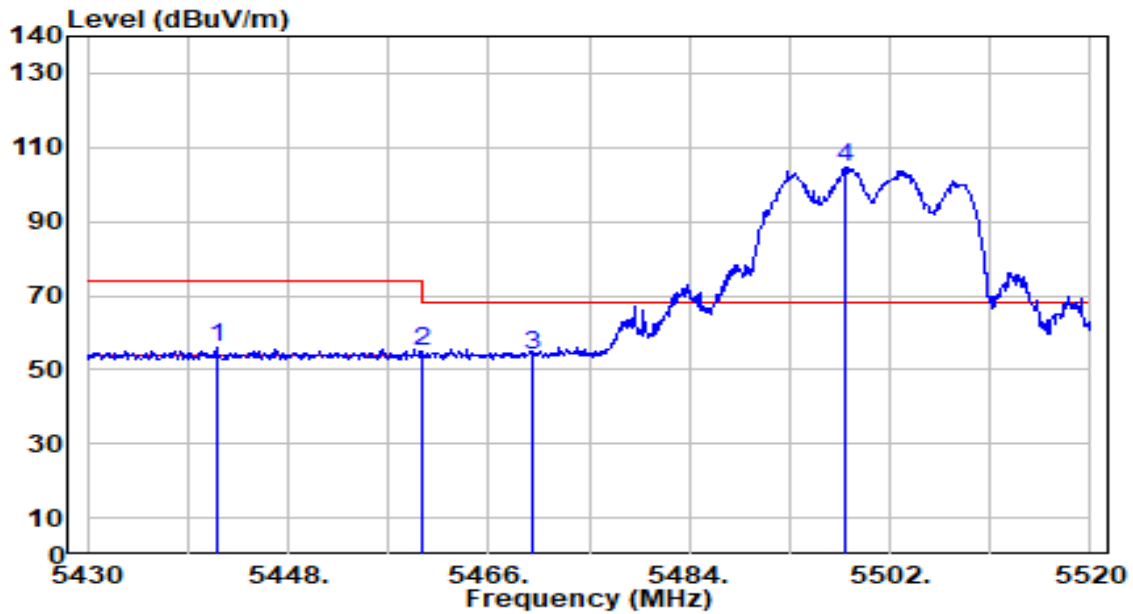


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.610	55.30	0.58	55.88	-18.12	74.00	248	186	Peak
2	5460.000	54.45	0.66	55.11	-18.89	74.00	248	186	Peak
3	* 5470.000	53.24	0.71	53.94	-14.26	68.20	248	186	Peak
4	5497.950	103.69	0.83	104.52	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

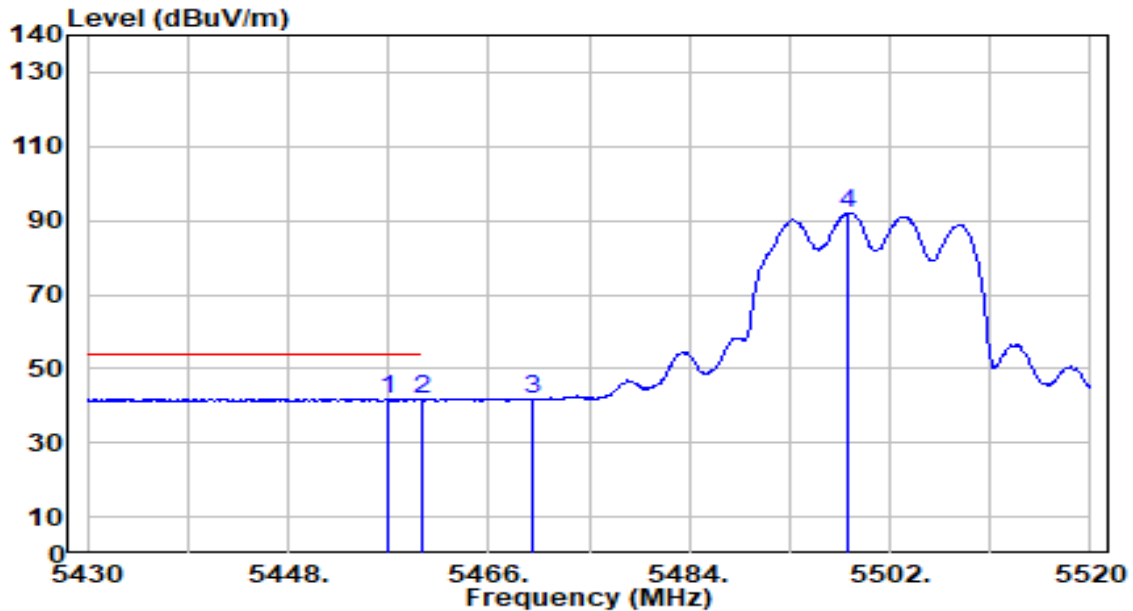


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.000	41.25	0.65	41.90	-12.10	54.00	248	186	Average
2		5460.000	40.97	0.66	41.64	-12.36	54.00	248	186	Average
3		5470.000	40.97	0.71	41.68	N/A	N/A	248	186	Average
4		5498.220	91.27	0.83	92.11	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

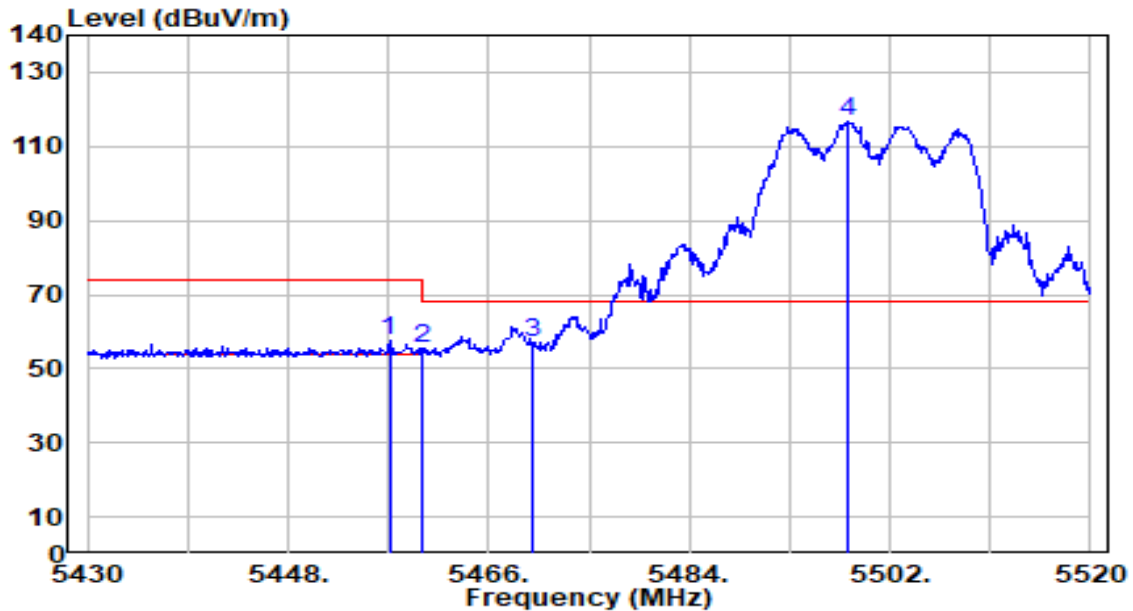


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.090	57.07	0.65	57.71	-16.29	74.00	184	192	Peak
2	5460.000	54.64	0.66	55.30	-18.70	74.00	184	192	Peak
3	* 5470.000	56.30	0.71	57.00	-11.20	68.20	184	192	Peak
4	5498.220	116.05	0.83	116.89	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

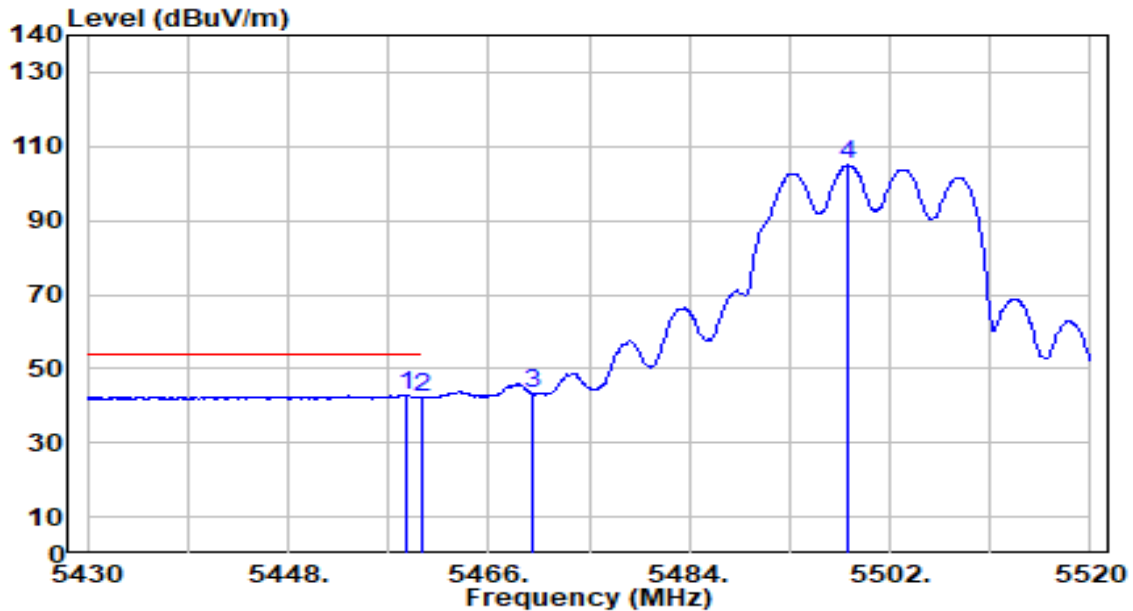


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.620	42.24	0.66	42.90	-11.10	54.00	184	192	Average
2		5460.000	41.54	0.66	42.20	-11.80	54.00	184	192	Average
3		5470.000	42.48	0.71	43.18	N/A	N/A	184	192	Average
4		5498.220	104.05	0.83	104.88	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

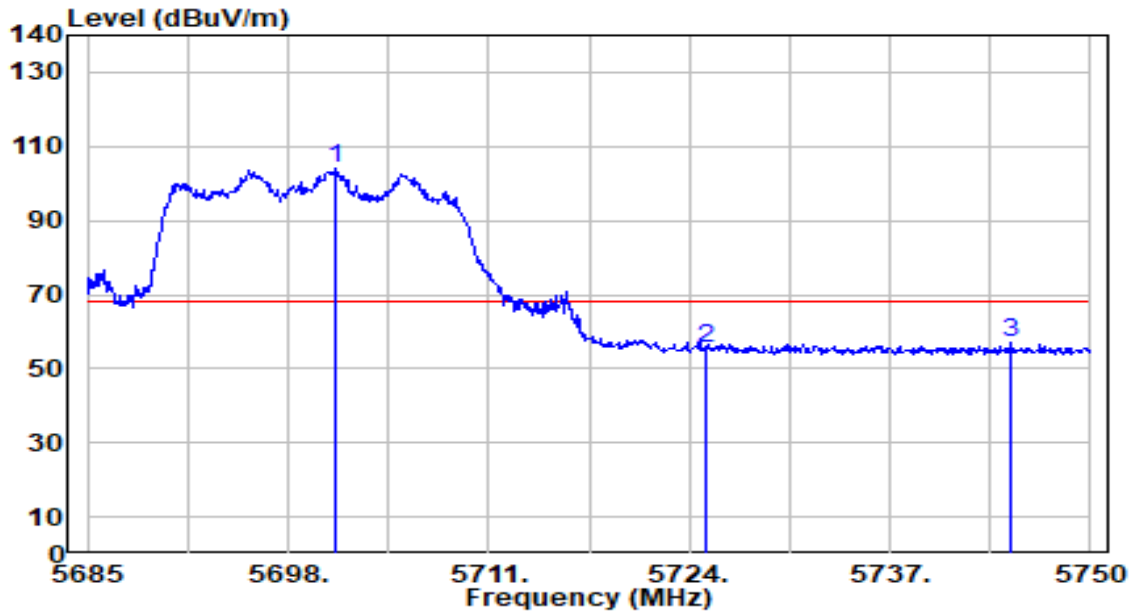


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.055	102.27	1.78	104.05	N/A	N/A	174	91	Peak
2	5725.000	53.62	1.89	55.51	-12.69	68.20	174	91	Peak
3	* 5744.865	55.08	1.99	57.07	-11.13	68.20	174	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

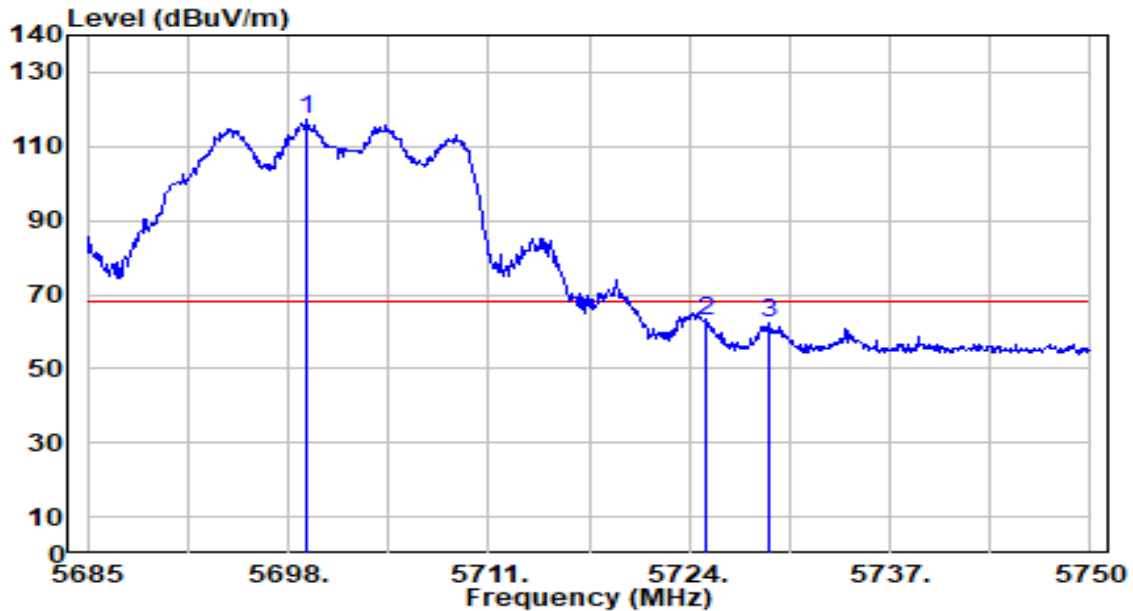


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.235	115.74	1.77	117.51	N/A	N/A	216	196	Peak
2	* 5725.000	60.83	1.89	62.73	-5.47	68.20	216	196	Peak
3	5729.135	60.31	1.91	62.22	-5.98	68.20	216	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

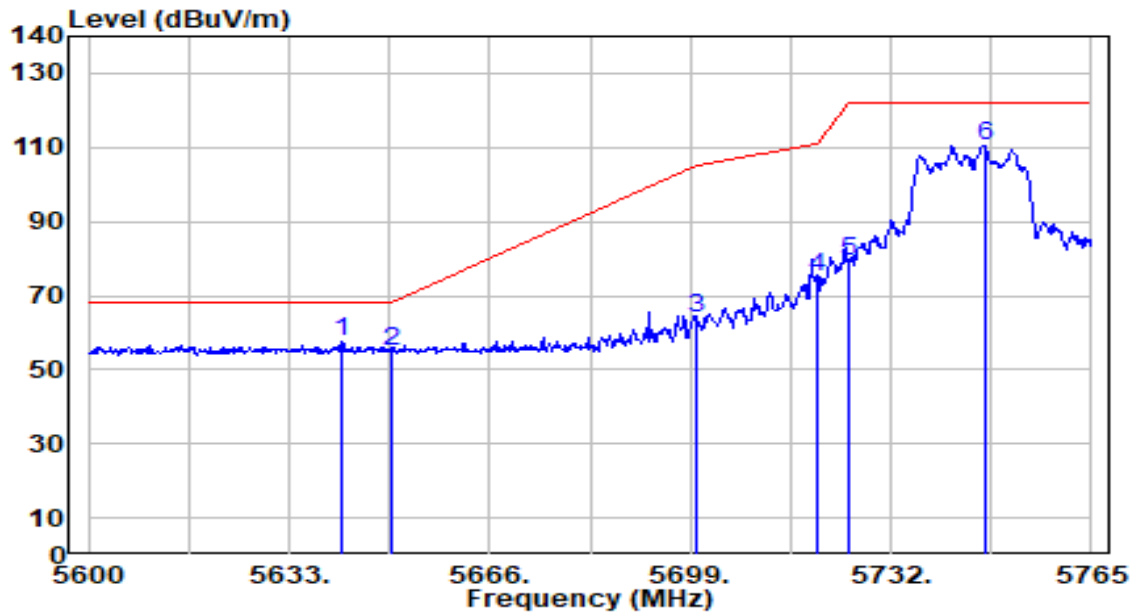


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5641.580	56.02	1.50	57.53	-10.67	68.20	183	168	Peak
2		5650.000	53.61	1.54	55.15	-13.05	68.20	183	168	Peak
3		5700.000	62.30	1.78	64.08	-41.12	105.20	183	168	Peak
4		5720.000	73.15	1.87	75.01	-35.79	110.80	183	168	Peak
5		5725.000	77.27	1.89	79.16	-43.04	122.20	183	168	Peak
6		5747.510	108.38	2.00	110.38	N/A	N/A	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

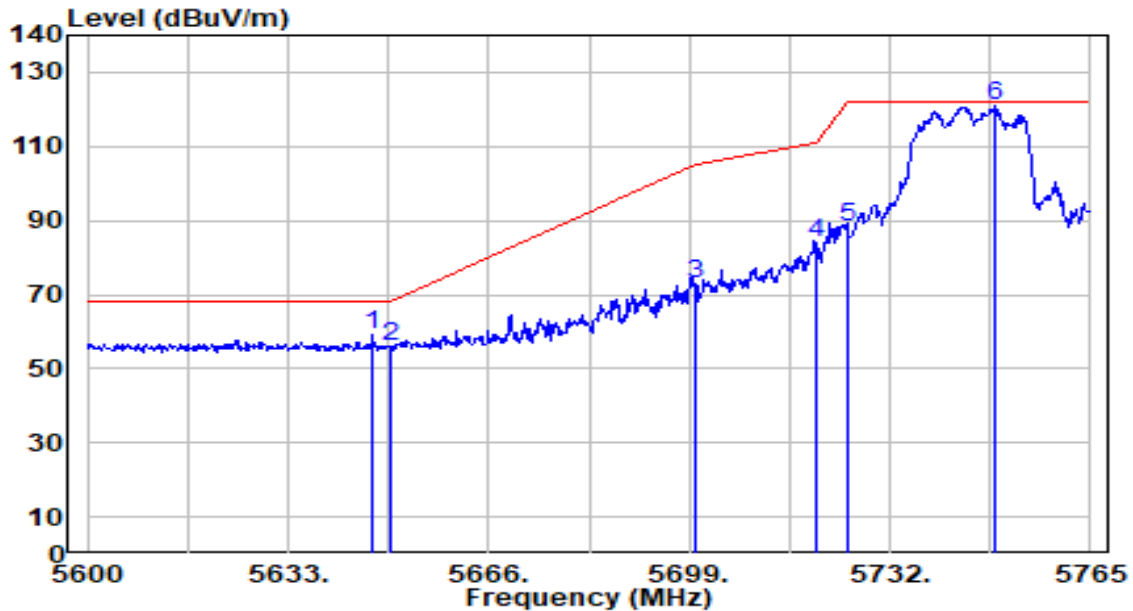


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.025	57.47	1.53	59.00	-9.20	68.20	181	156	Peak
2		5650.000	54.39	1.54	55.93	-12.27	68.20	181	156	Peak
3		5700.000	70.94	1.78	72.72	-32.48	105.20	181	156	Peak
4		5720.000	82.02	1.87	83.89	-26.91	110.80	181	156	Peak
5		5725.000	86.32	1.89	88.22	-33.98	122.20	181	156	Peak
6		5749.325	119.02	2.01	121.02	N/A	N/A	181	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

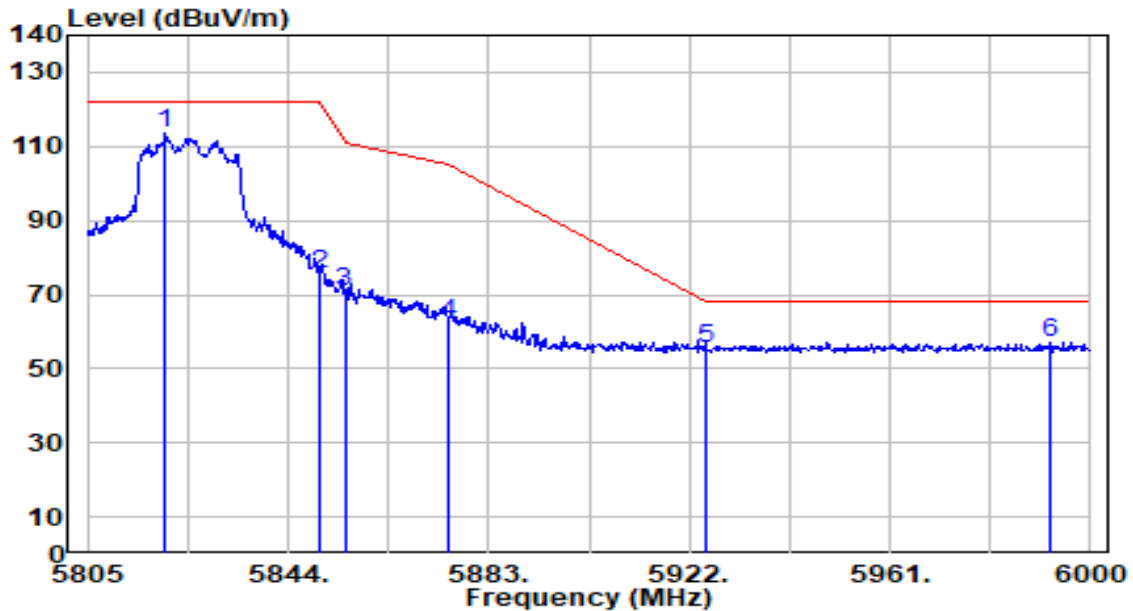


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.210	111.20	2.25	113.44	N/A	N/A	315	164	Peak
2	5850.000	73.49	2.25	75.74	-46.46	122.20	315	164	Peak
3	5855.000	68.61	2.25	70.86	-39.94	110.80	315	164	Peak
4	5875.000	60.13	2.26	62.39	-42.81	105.20	315	164	Peak
5	5925.000	53.08	2.27	55.35	-12.85	68.20	315	164	Peak
6	* 5992.395	54.90	2.28	57.18	-11.02	68.20	315	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

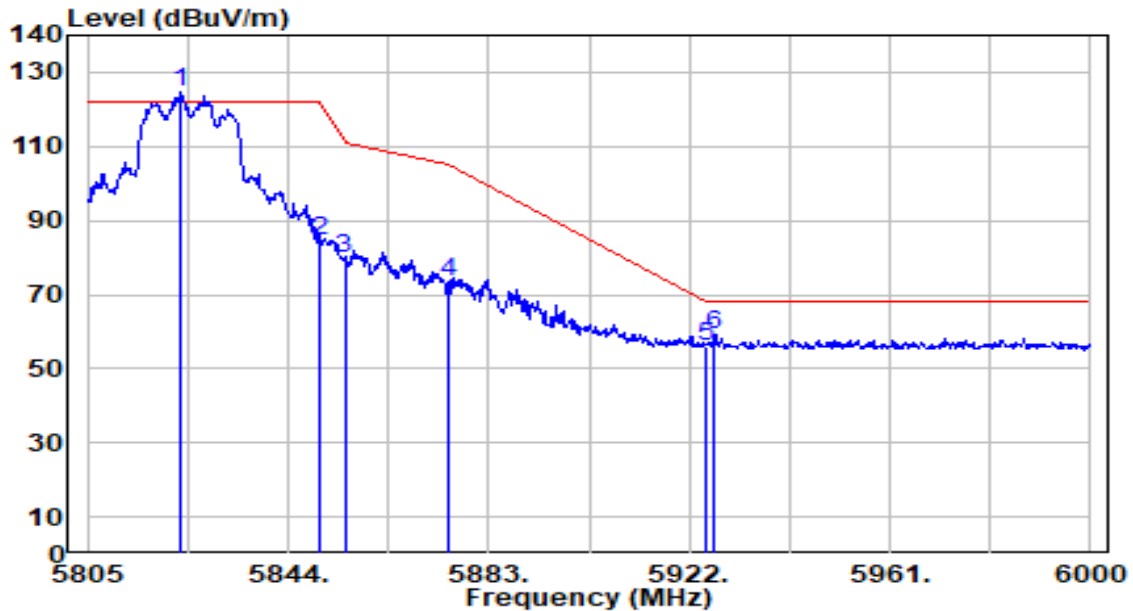


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.135	122.37	2.25	124.62	N/A	N/A	115	163	Peak
2	5850.000	82.35	2.25	84.60	-37.60	122.20	115	163	Peak
3	5855.000	77.69	2.25	79.95	-30.85	110.80	115	163	Peak
4	5875.000	71.00	2.26	73.26	-31.94	105.20	115	163	Peak
5	5925.000	53.96	2.27	56.22	-11.98	68.20	115	163	Peak
6	* 5926.875	56.88	2.27	59.15	-9.05	68.20	115	163	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

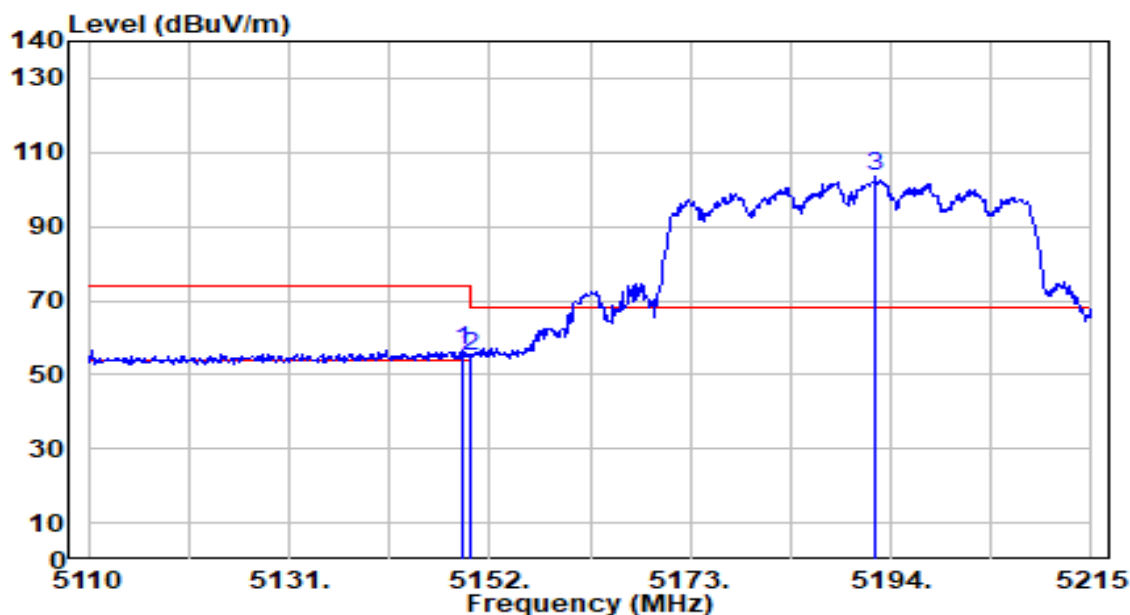


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	55.81	0.65	56.46	-17.54	74.00	318	197	Peak
2		5150.000	54.47	0.65	55.12	-18.88	74.00	318	197	Peak
3		5192.320	103.08	0.69	103.78	N/A	N/A	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

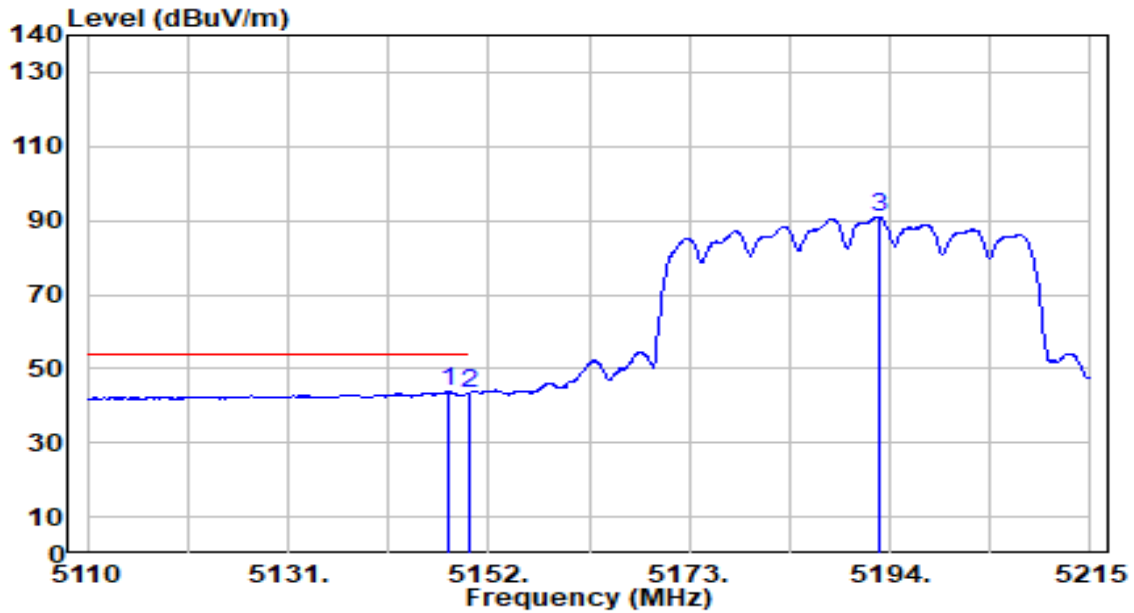


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.905	43.04	0.65	43.69	-10.31	54.00	318	197	Average
2		5150.000	42.81	0.65	43.47	-10.53	54.00	318	197	Average
3		5192.845	90.07	0.70	90.76	N/A	N/A	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

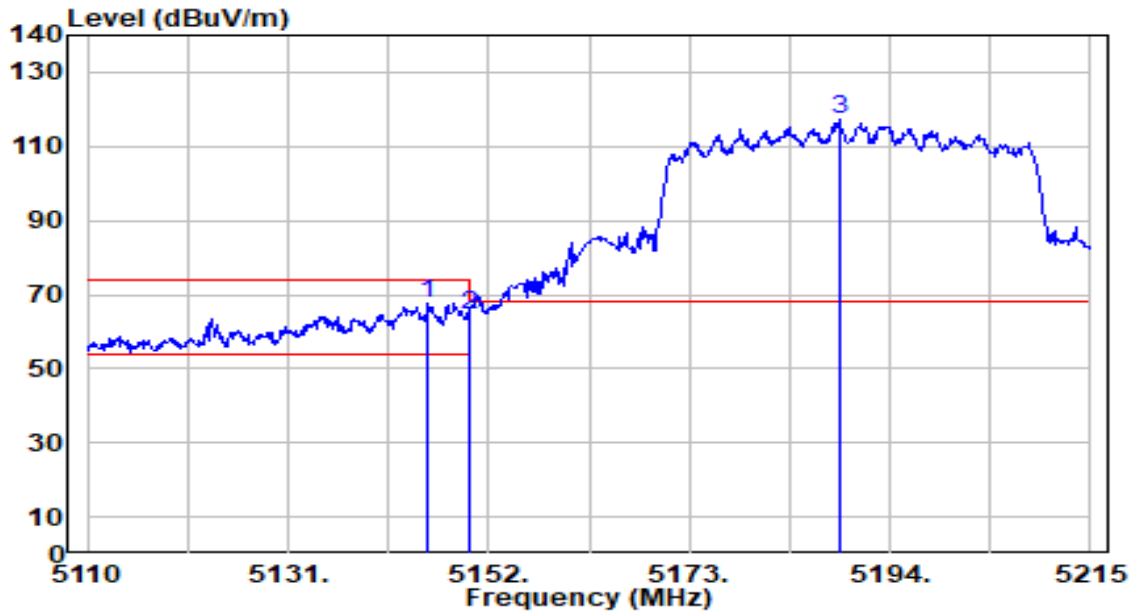


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.595	66.96	0.65	67.61	-6.39	74.00	200	290	Peak
2		5150.000	64.01	0.65	64.67	-9.33	74.00	200	290	Peak
3		5188.645	116.68	0.69	117.37	N/A	N/A	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

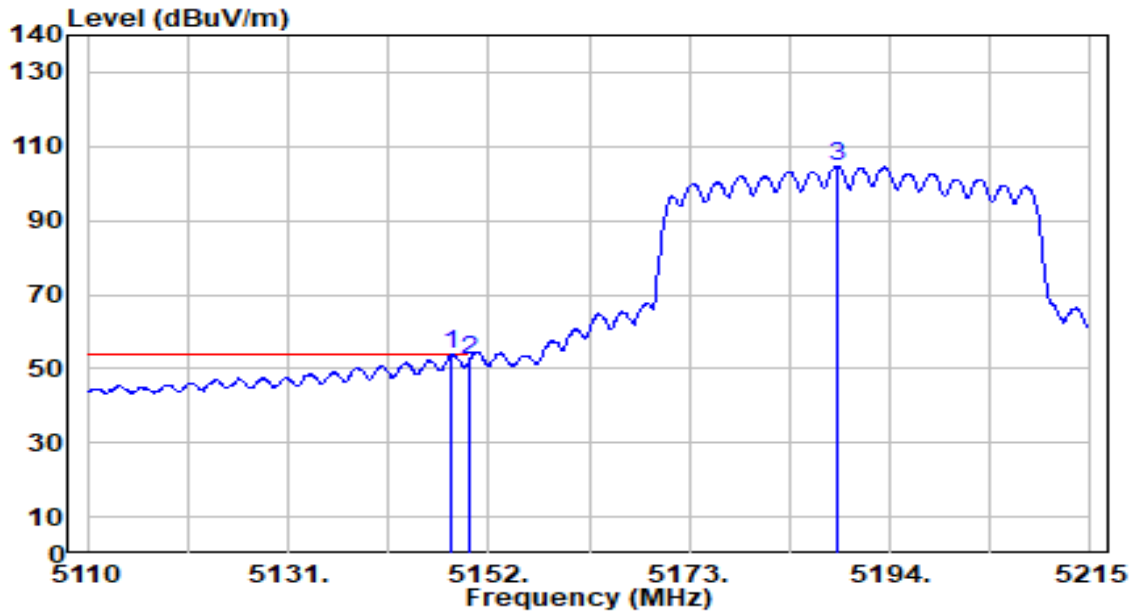


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.115	53.19	0.65	53.84	-0.16	54.00	200	290	Average
2		5150.000	51.60	0.65	52.26	-1.74	54.00	200	290	Average
3		5188.540	103.89	0.69	104.58	N/A	N/A	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

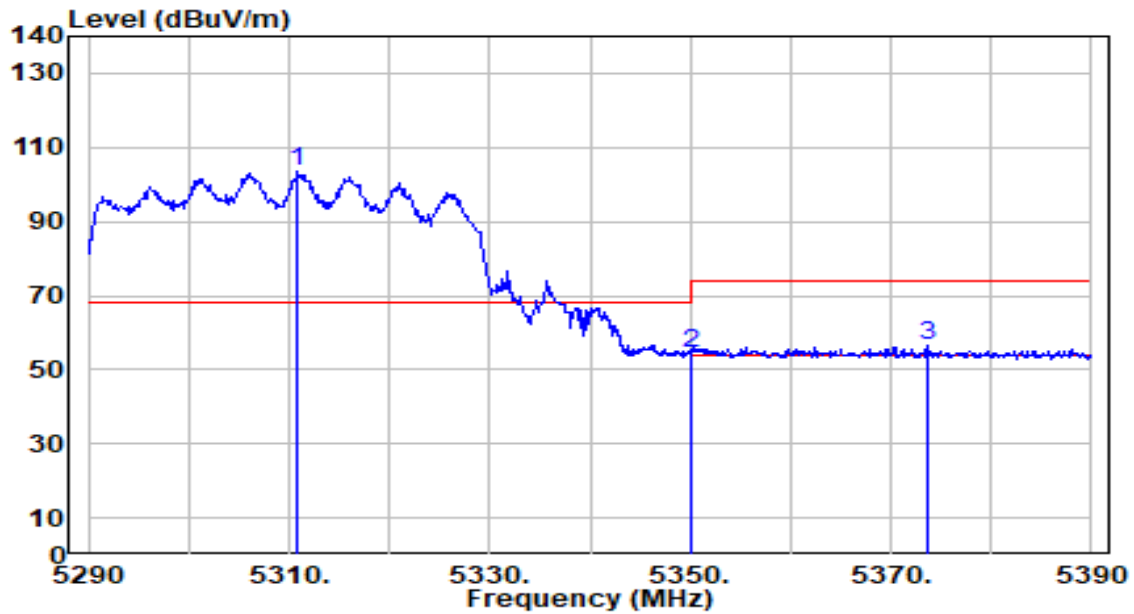


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5310.900	103.23	0.53	103.76	N/A	N/A	300	186	Peak
2	5350.000	53.94	0.47	54.41	-19.59	74.00	300	186	Peak
3	* 5373.700	56.04	0.43	56.48	-17.52	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

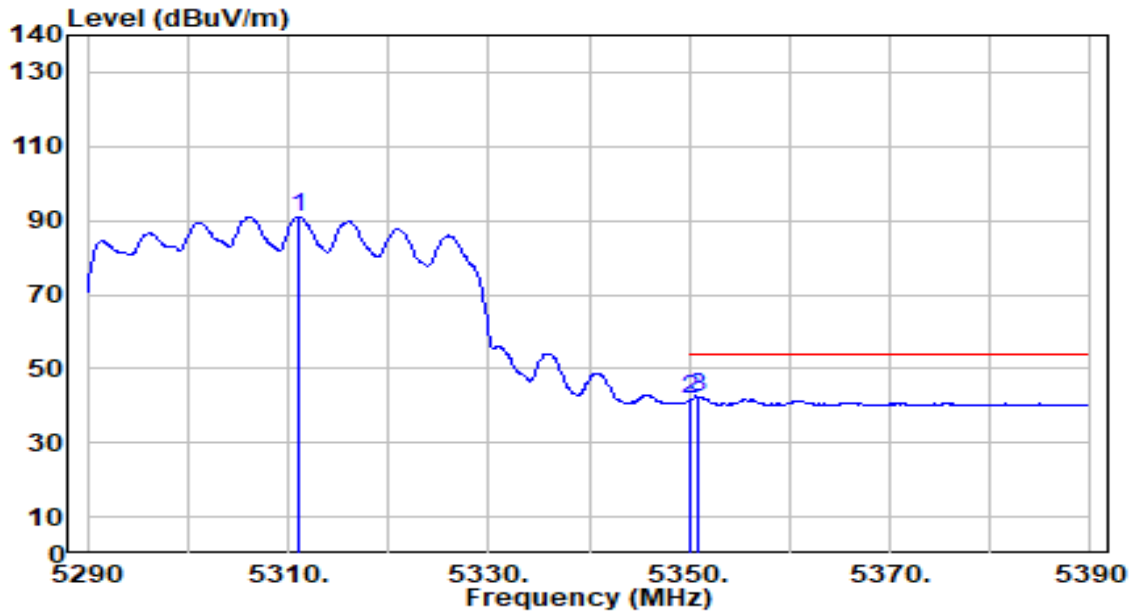


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.000	90.54	0.53	91.07	N/A	N/A	300	186	Average
2	5350.000	41.03	0.47	41.51	-12.49	54.00	300	186	Average
3	* 5351.000	41.89	0.47	42.36	-11.64	54.00	300	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

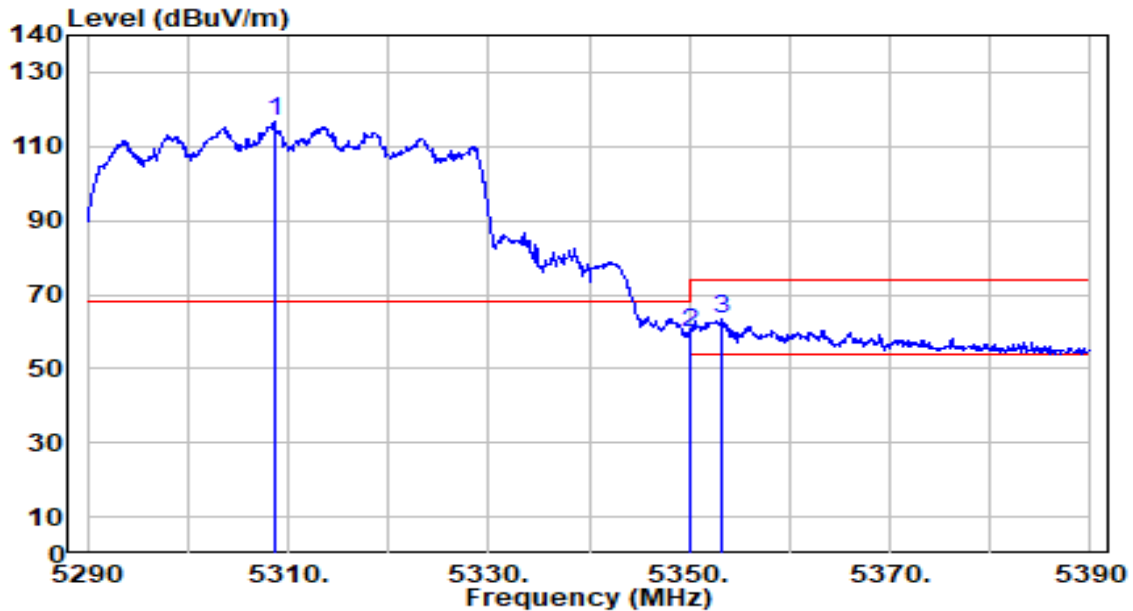


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5308.600	116.22	0.53	116.76	N/A	N/A	216	196	Peak
2	5350.000	59.31	0.47	59.78	-14.22	74.00	216	196	Peak
3	* 5353.300	63.03	0.47	63.49	-10.51	74.00	216	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

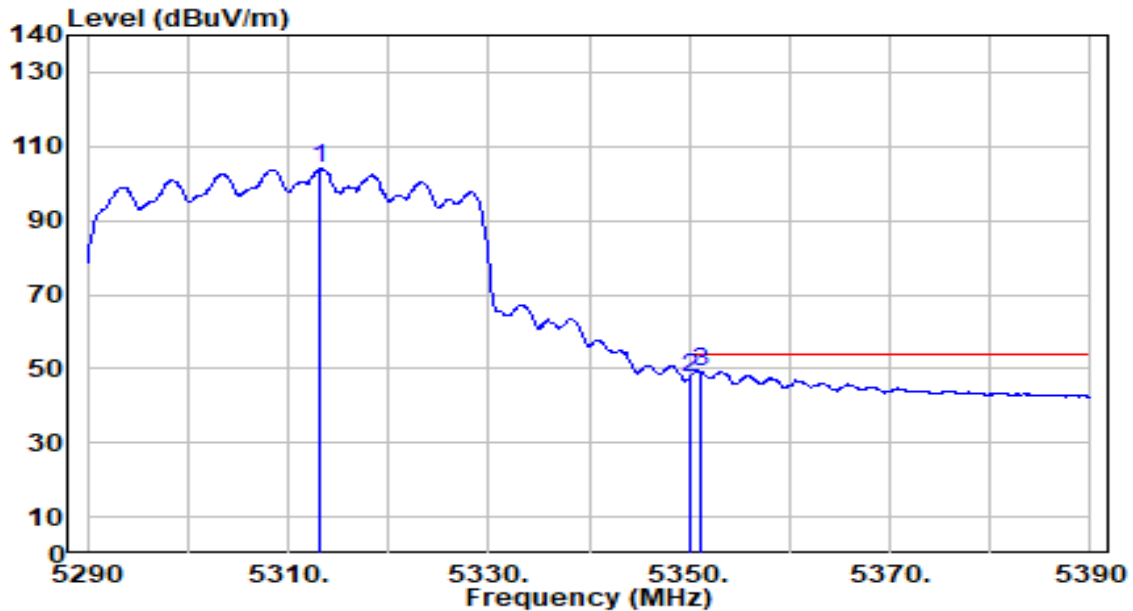


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.200	103.38	0.53	103.91	N/A	N/A	216	196	Average
2	5350.000	47.23	0.47	47.70	-6.30	54.00	216	196	Average
3	* 5351.200	48.92	0.47	49.39	-4.61	54.00	216	196	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

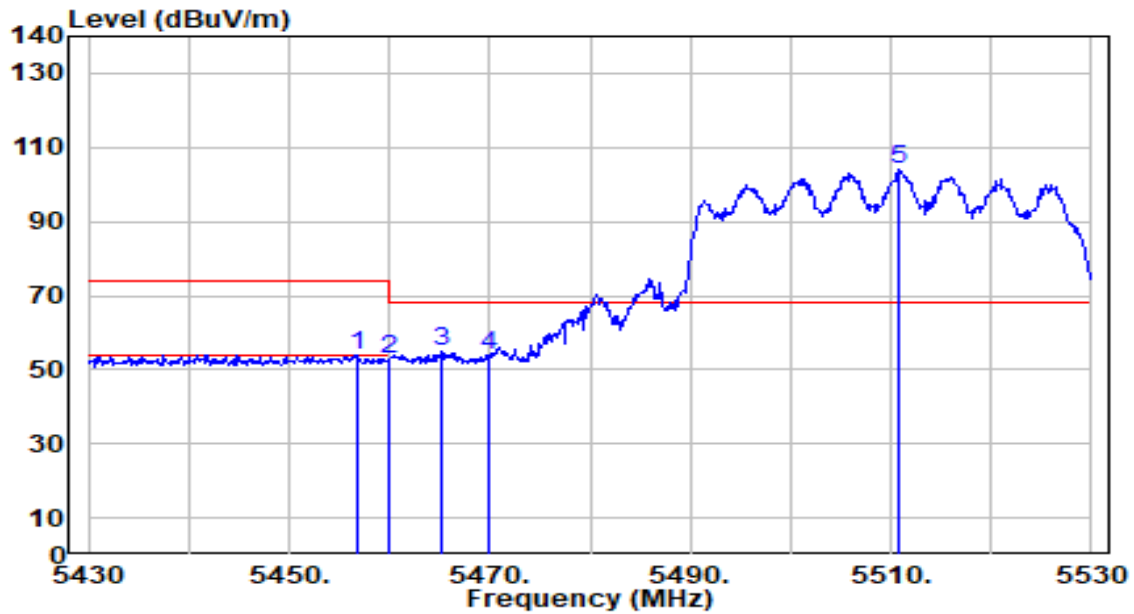


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.700	53.39	0.65	54.04	-19.96	74.00	248	186	Peak
2	5460.000	52.42	0.66	53.08	-20.92	74.00	248	186	Peak
3	* 5465.300	54.31	0.69	54.99	-13.21	68.20	248	186	Peak
4	5470.000	53.30	0.71	54.01	-14.19	68.20	248	186	Peak
5	5510.800	103.33	0.89	104.22	N/A	N/A	248	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

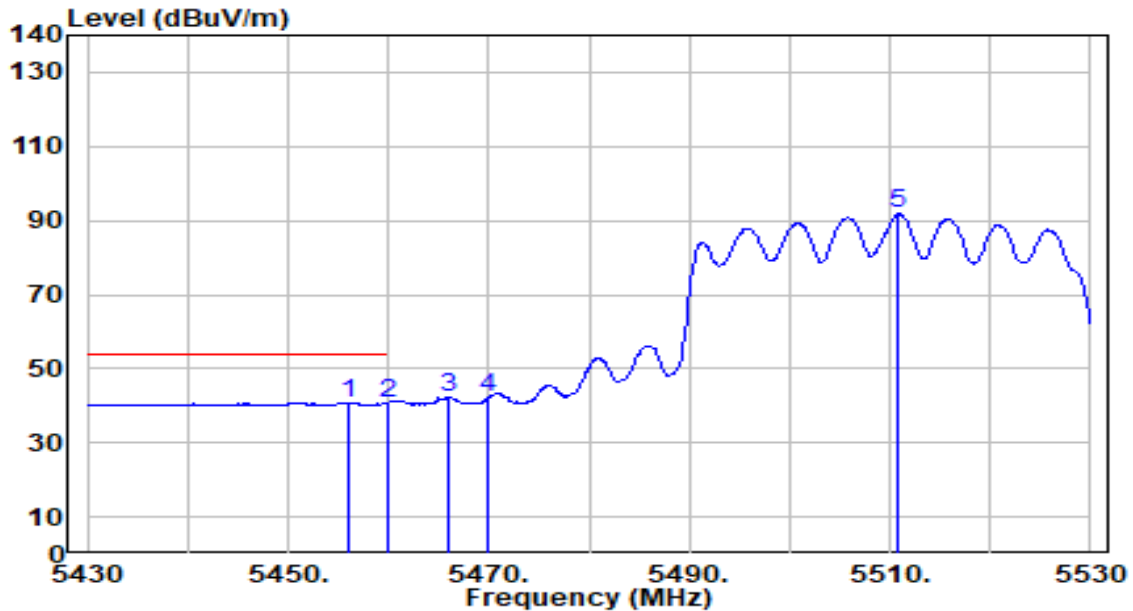


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.000	40.22	0.64	40.87	-13.13	54.00	248	186	Average
2		5460.000	40.08	0.66	40.74	-13.26	54.00	248	186	Average
3		5466.100	41.58	0.69	42.27	N/A	N/A	248	186	Average
4		5470.000	41.52	0.71	42.23	N/A	N/A	248	186	Average
5		5510.800	90.97	0.89	91.86	N/A	N/A	248	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

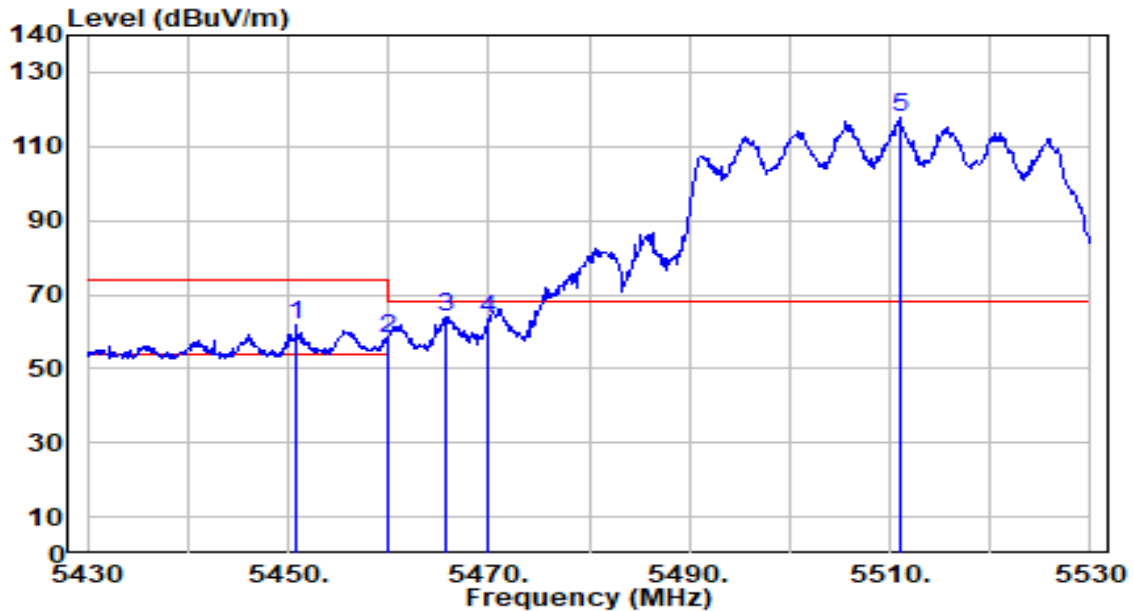


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.800	61.06	0.62	61.68	-12.32	74.00	184	192	Peak
2	5460.000	57.63	0.66	58.29	-15.71	74.00	184	192	Peak
3	* 5465.800	63.24	0.69	63.93	-4.27	68.20	184	192	Peak
4	5470.000	62.84	0.71	63.54	-4.66	68.20	184	192	Peak
5	5511.000	116.66	0.89	117.56	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

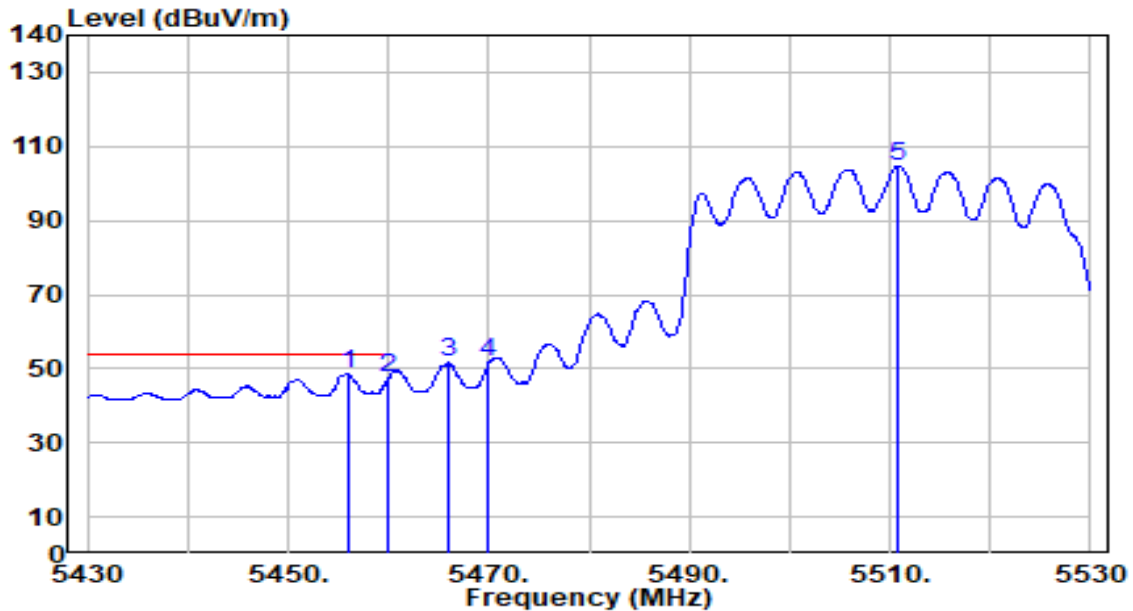


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.000	48.11	0.64	48.76	-5.24	54.00	184	192	Average
2		5460.000	47.04	0.66	47.70	-6.30	54.00	184	192	Average
3		5466.100	50.98	0.69	51.67	N/A	N/A	184	192	Average
4		5470.000	50.83	0.71	51.53	N/A	N/A	184	192	Average
5		5510.800	103.83	0.89	104.72	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

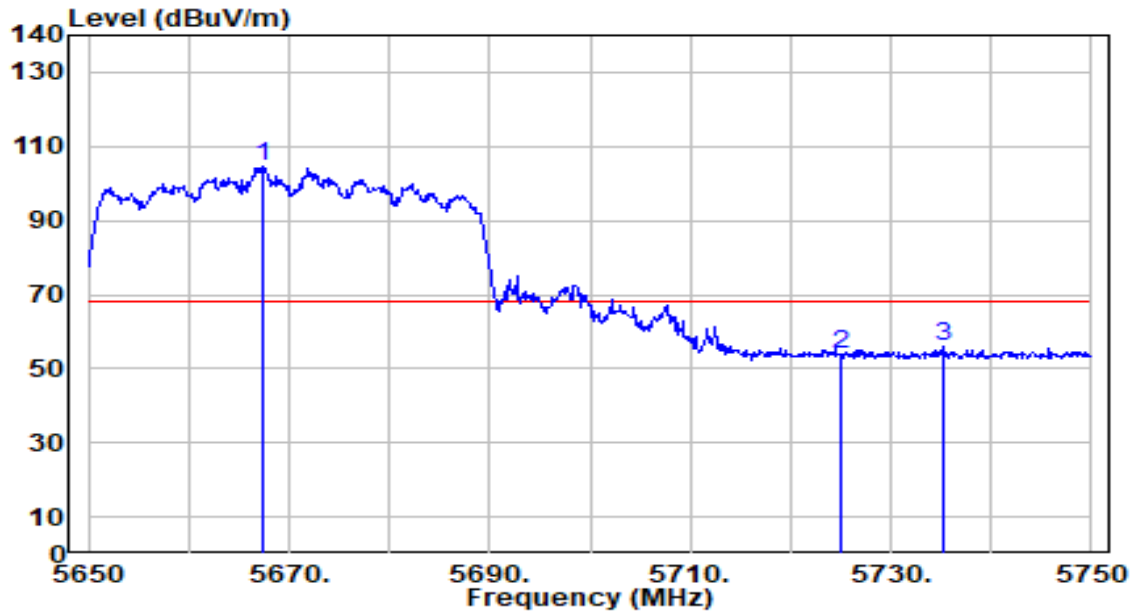


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5667.300	102.89	1.62	104.52	N/A	N/A	174	91	Peak
2	5725.000	51.85	1.89	53.74	-14.46	68.20	174	91	Peak
3	* 5735.200	53.96	1.94	55.90	-12.30	68.20	174	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

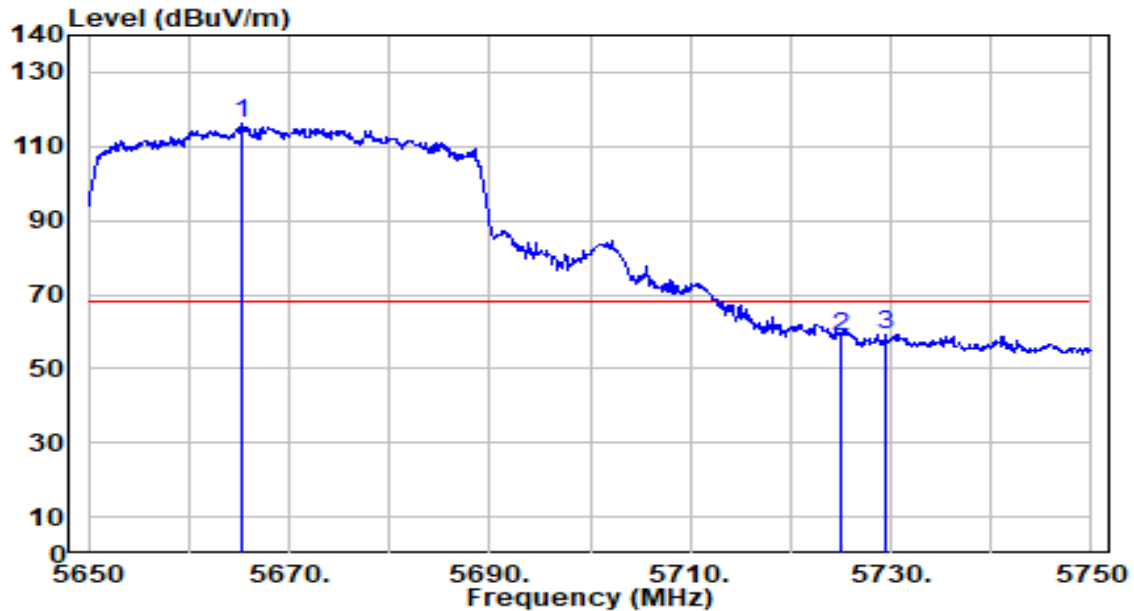


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.300	114.39	1.61	116.01	N/A	N/A	216	196	Peak
2	5725.000	56.62	1.89	58.51	-9.69	68.20	216	196	Peak
3	* 5729.500	57.50	1.91	59.42	-8.78	68.20	216	196	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

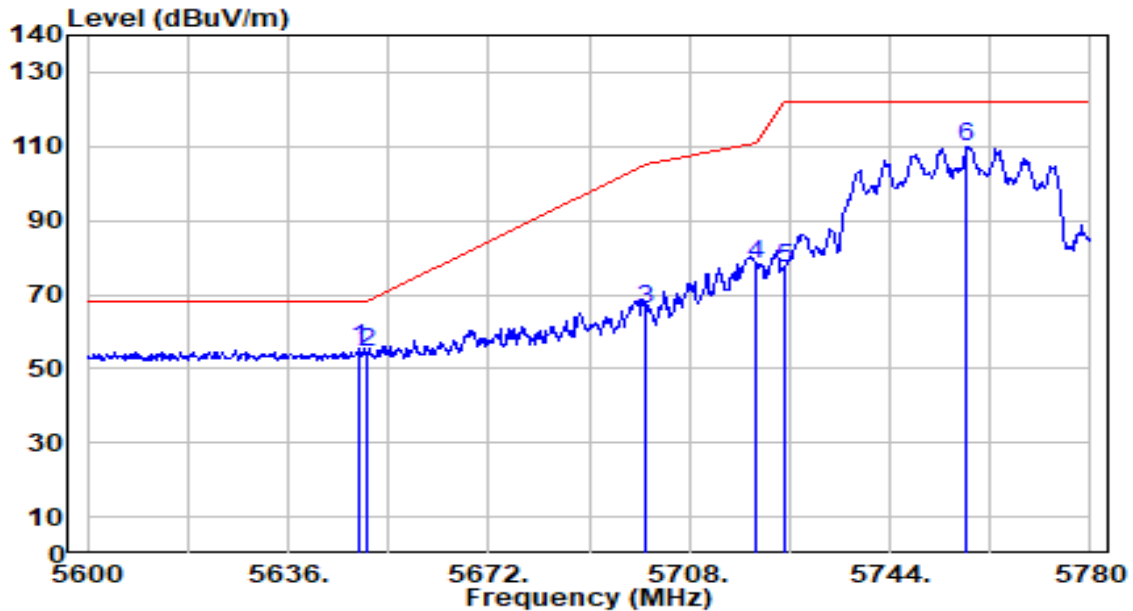


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.780	53.75	1.54	55.29	-12.91	68.20	183	168	Peak
2		5650.000	52.90	1.54	54.44	-13.76	68.20	183	168	Peak
3		5700.000	64.18	1.78	65.96	-39.24	105.20	183	168	Peak
4		5720.000	76.10	1.87	77.97	-32.83	110.80	183	168	Peak
5		5725.000	75.00	1.89	76.90	-45.30	122.20	183	168	Peak
6		5757.680	107.84	2.05	109.89	N/A	N/A	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

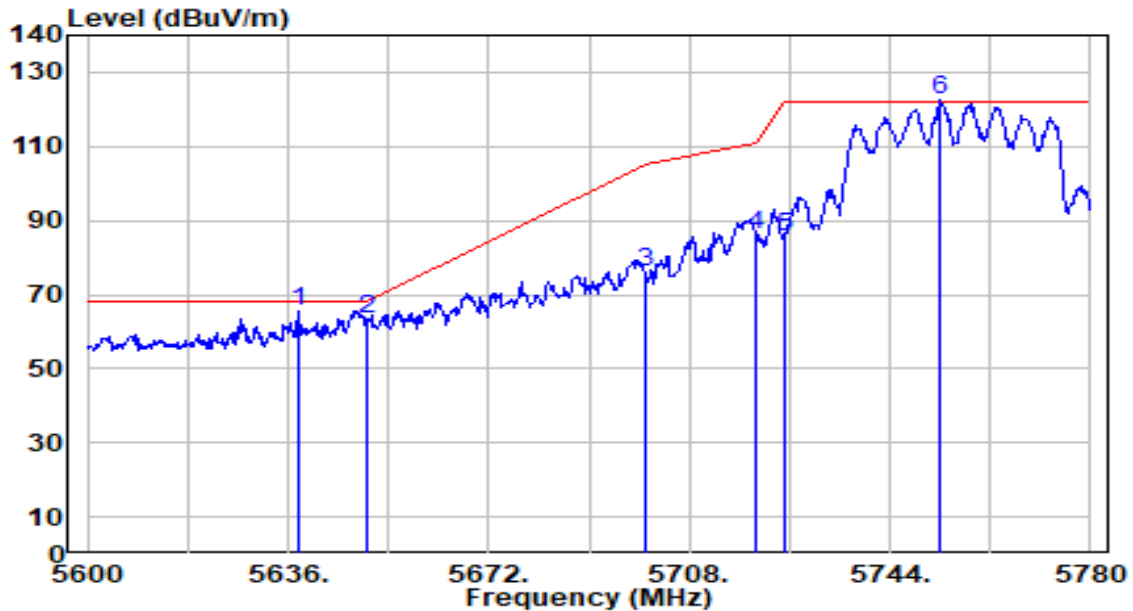


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5637.980	64.20	1.49	65.68	-2.52	68.20	181	156	Peak
2		5650.000	61.98	1.54	63.52	-4.68	68.20	181	156	Peak
3		5700.000	74.16	1.78	75.93	-29.27	105.20	181	156	Peak
4		5720.000	83.99	1.87	85.86	-24.94	110.80	181	156	Peak
5		5725.000	83.93	1.89	85.83	-36.37	122.20	181	156	Peak
6		5753.180	120.74	2.02	122.77	N/A	N/A	181	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

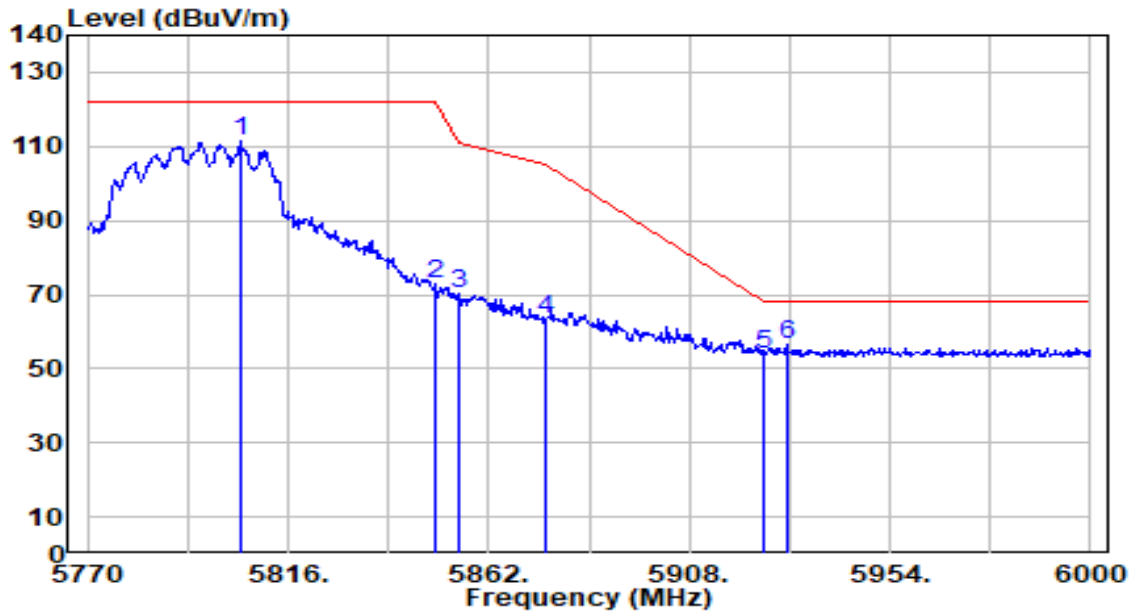


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5804.960	109.04	2.24	111.28	N/A	N/A	315	164	Peak
2	5850.000	70.79	2.25	73.05	-49.15	122.20	315	164	Peak
3	5855.000	67.87	2.25	70.12	-40.68	110.80	315	164	Peak
4	5875.000	61.04	2.26	63.29	-41.91	105.20	315	164	Peak
5	5925.000	51.88	2.27	54.15	-14.05	68.20	315	164	Peak
6	* 5930.310	54.12	2.27	56.39	-11.81	68.20	315	164	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

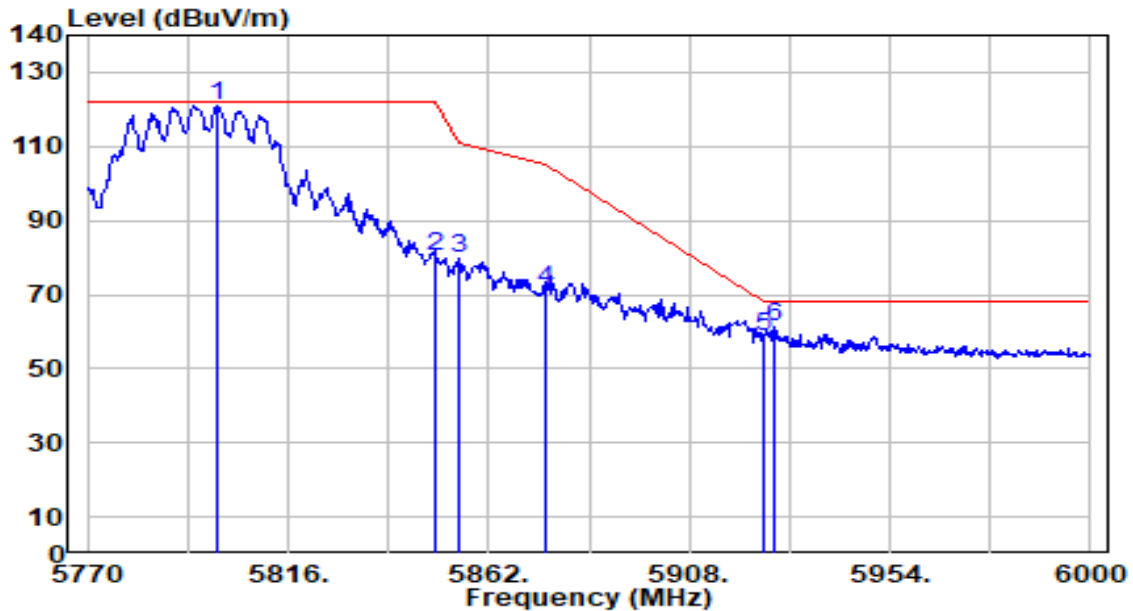


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5799.900	118.71	2.24	120.95	N/A	N/A	115	163	Peak
2	5850.000	78.03	2.25	80.29	-41.91	122.20	115	163	Peak
3	5855.000	77.31	2.25	79.56	-31.24	110.80	115	163	Peak
4	5875.000	69.02	2.26	71.28	-33.92	105.20	115	163	Peak
5	5925.000	56.57	2.27	58.84	-9.36	68.20	115	163	Peak
6	* 5927.320	58.78	2.27	61.05	-7.15	68.20	115	163	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

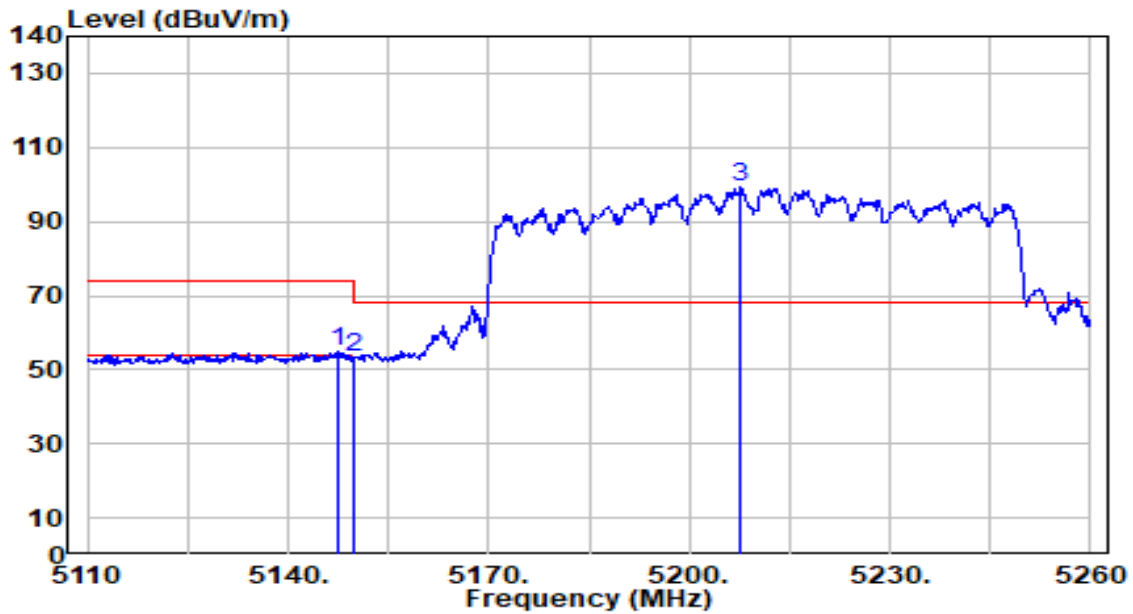


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.500	54.39	0.65	55.05	-18.95	74.00	318	197	Peak
2		5150.000	52.69	0.65	53.35	-20.65	74.00	318	197	Peak
3		5207.650	98.40	0.69	99.09	N/A	N/A	318	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

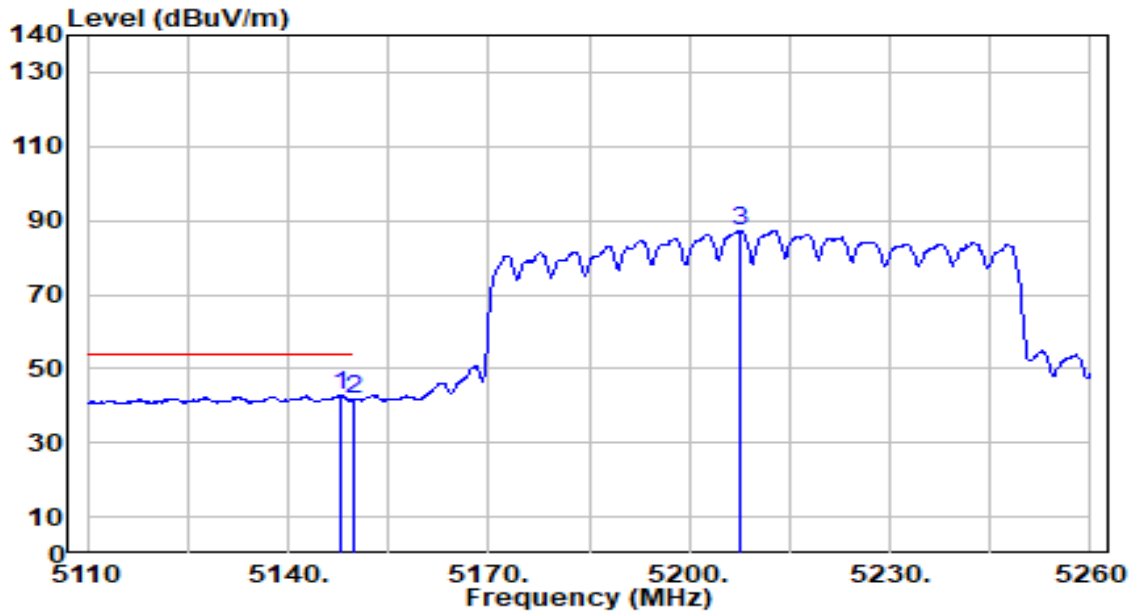


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	41.98	0.65	42.64	-11.36	54.00	318	197	Average
2		5150.000	41.06	0.65	41.71	-12.29	54.00	318	197	Average
3		5207.500	86.50	0.69	87.19	N/A	N/A	318	197	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

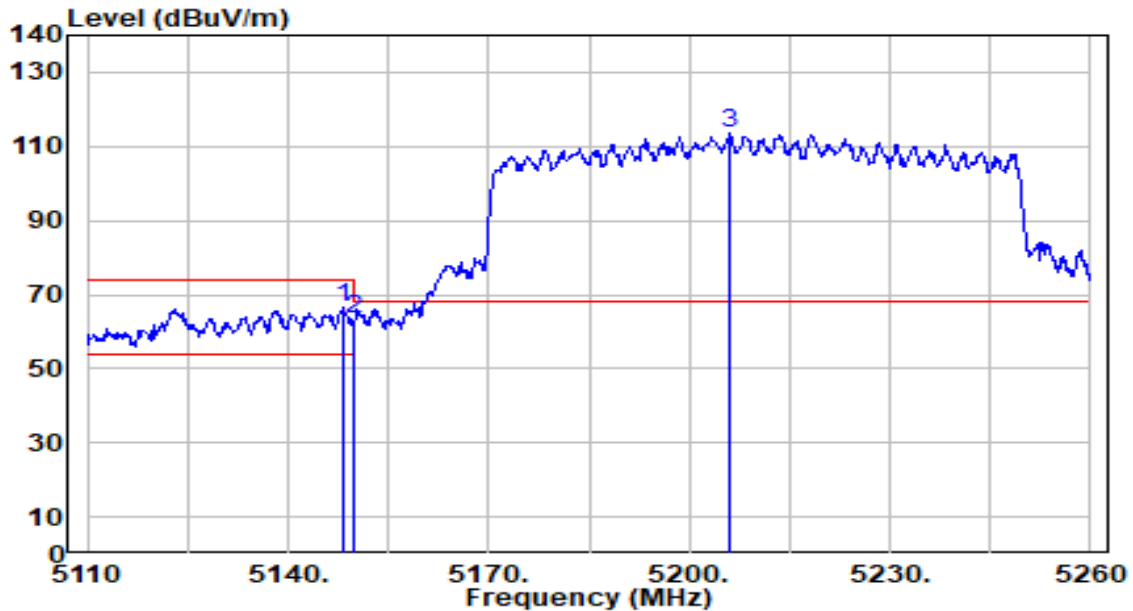


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	65.74	0.65	66.39	-7.61	74.00	200	290	Peak
2		5150.000	62.62	0.65	63.28	-10.72	74.00	200	290	Peak
3		5206.150	113.03	0.69	113.72	N/A	N/A	200	290	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

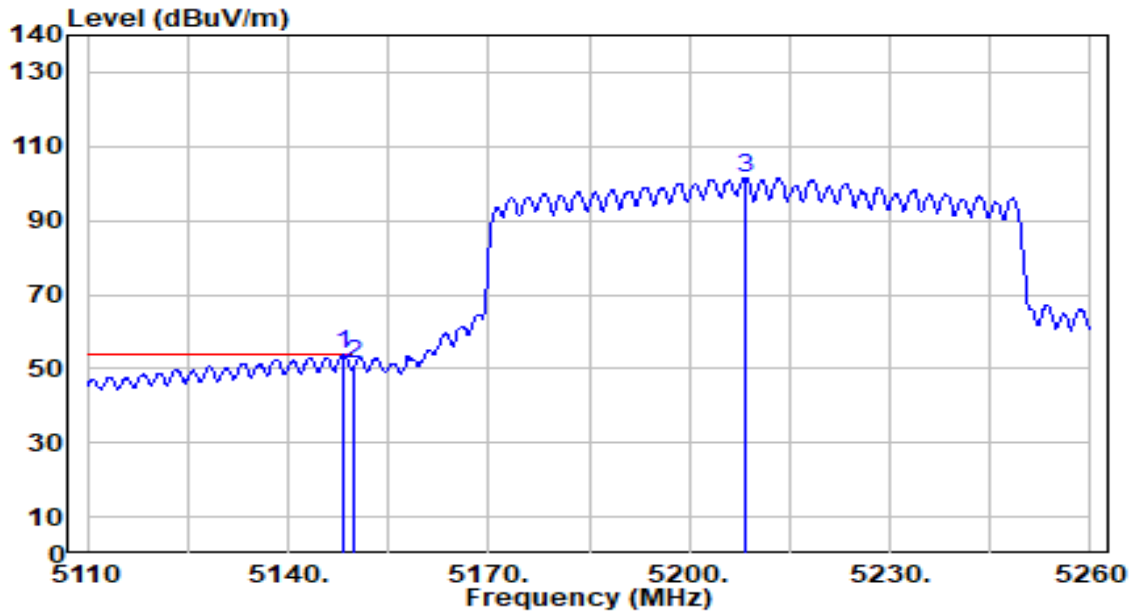


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.250	53.25	0.65	53.90	-0.10	54.00	200	290	Average
2		5150.000	50.66	0.65	51.32	-2.68	54.00	200	290	Average
3		5208.250	100.86	0.69	101.55	N/A	N/A	200	290	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

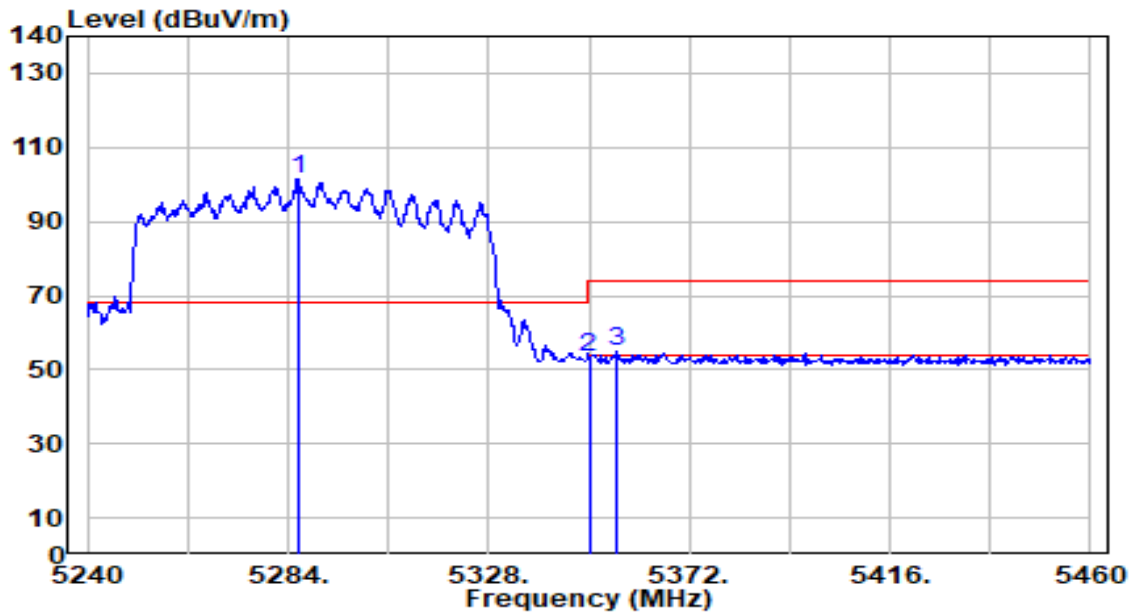


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.200	100.83	0.57	101.40	N/A	N/A	300	186	Peak
2	5350.000	52.63	0.47	53.10	-20.90	74.00	300	186	Peak
3	* 5356.160	54.32	0.46	54.78	-19.22	74.00	300	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

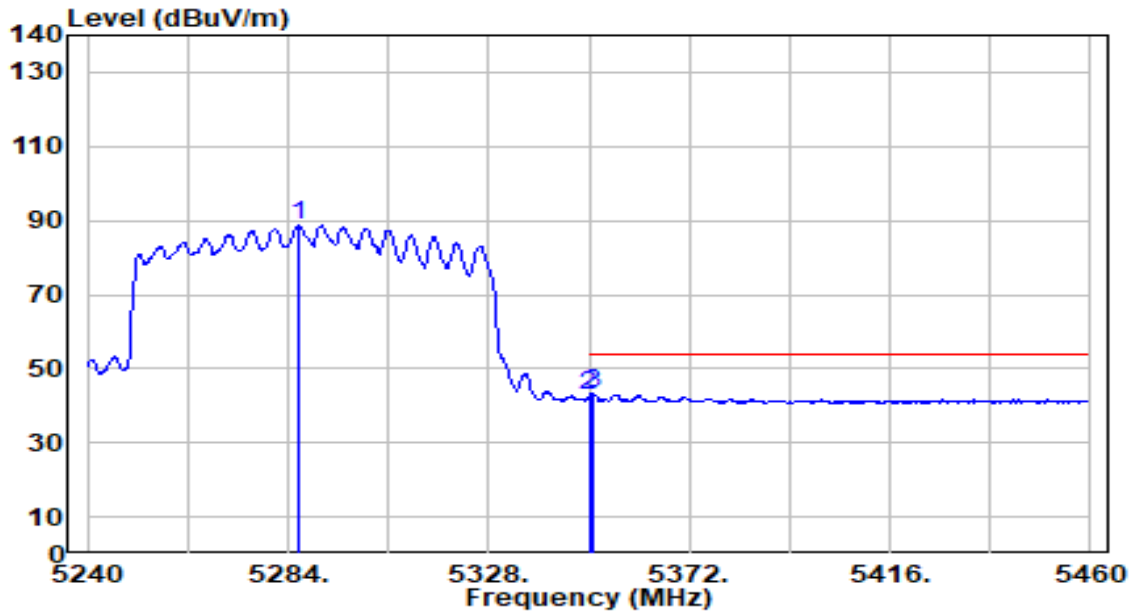


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.200	88.24	0.57	88.81	N/A	N/A	300	186	Average
2	5350.000	42.07	0.47	42.54	-11.46	54.00	300	186	Average
3	* 5350.880	42.65	0.47	43.12	-10.88	54.00	300	186	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

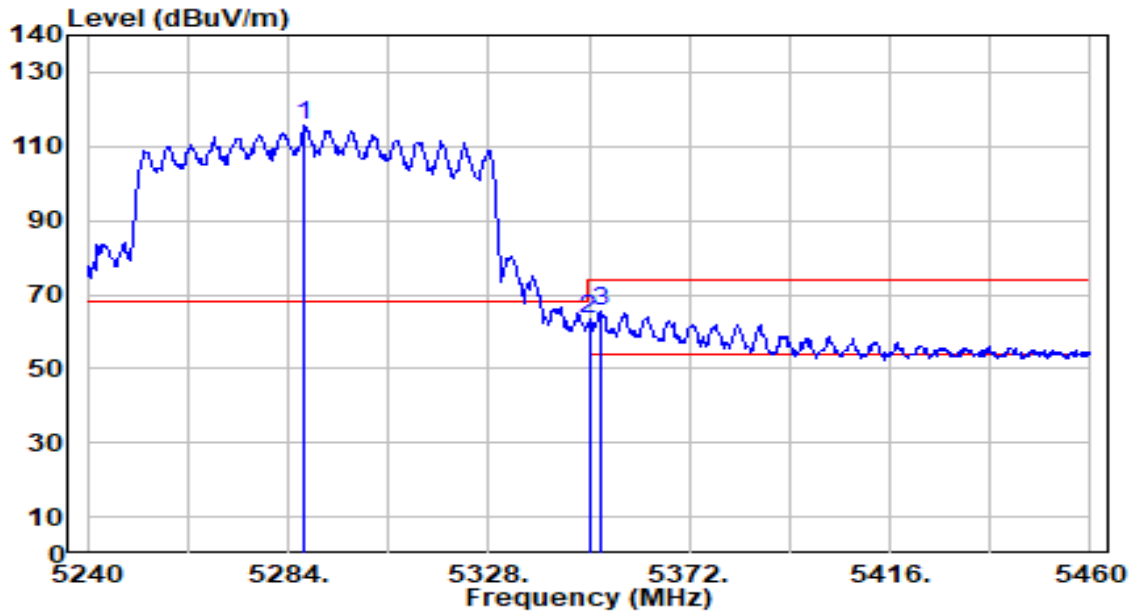


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.520	115.15	0.57	115.72	N/A	N/A	200	165	Peak
2	5350.000	62.72	0.47	63.19	-10.81	74.00	200	165	Peak
3	* 5352.860	65.26	0.47	65.73	-8.27	74.00	200	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

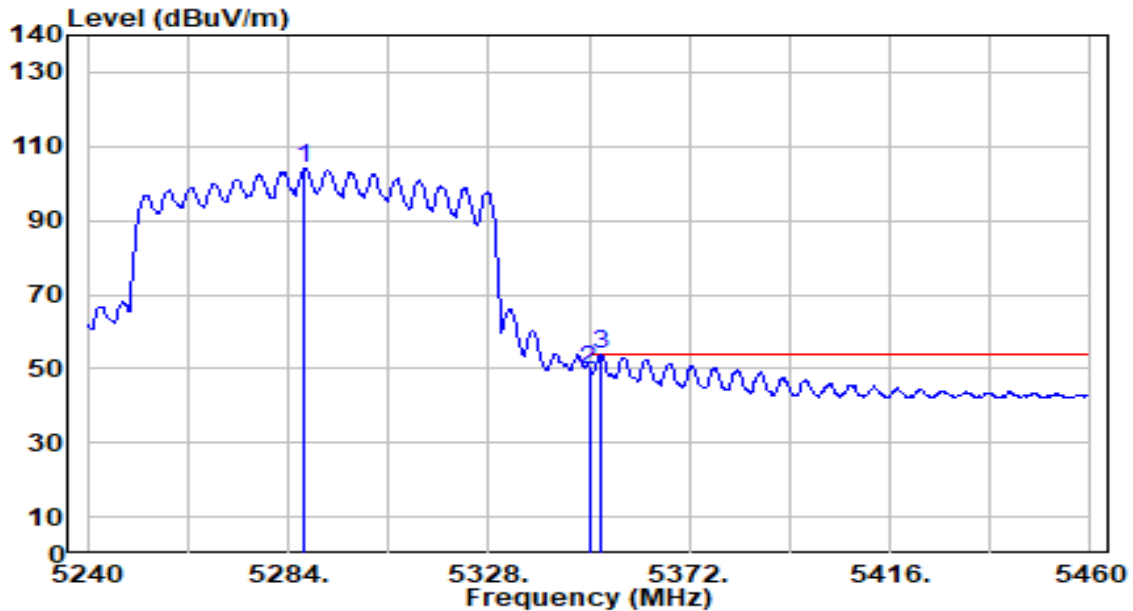


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.740	103.38	0.57	103.95	N/A	N/A	200	165	Average
2	5350.000	49.37	0.47	49.84	-4.16	54.00	200	165	Average
3	* 5352.640	53.36	0.47	53.83	-0.17	54.00	200	165	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

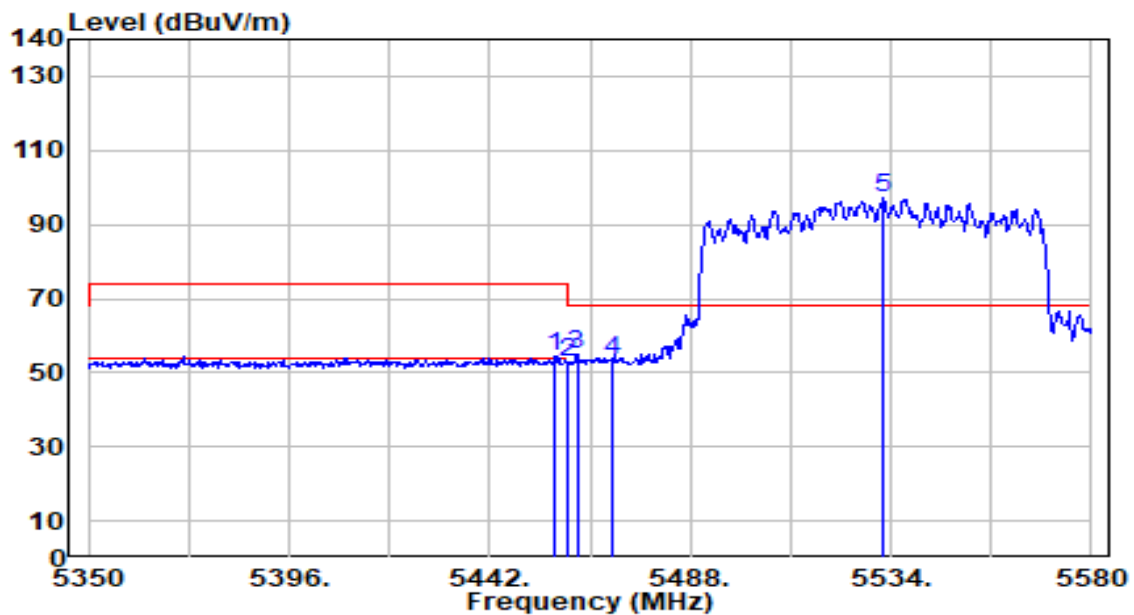


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.950	53.82	0.65	54.47	-19.53	74.00	174	91	Peak
2	5460.000	52.34	0.66	53.00	-21.00	74.00	174	91	Peak
3	* 5462.010	54.11	0.67	54.78	-13.42	68.20	174	91	Peak
4	5470.000	52.75	0.71	53.46	-14.74	68.20	174	91	Peak
5	5532.160	96.32	0.99	97.31	N/A	N/A	174	91	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

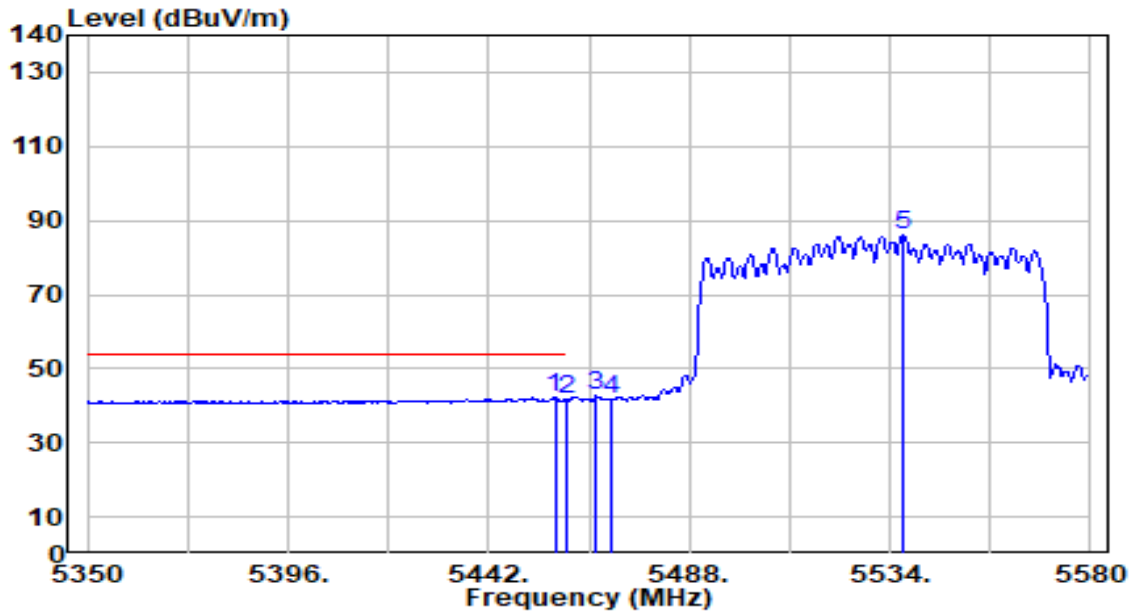


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.180	41.56	0.65	42.21	-11.79	54.00	174	91	Average
2		5460.000	40.99	0.66	41.65	-12.35	54.00	174	91	Average
3		5466.610	41.89	0.69	42.58	N/A	N/A	174	91	Average
4		5470.000	40.95	0.71	41.66	N/A	N/A	174	91	Average
5		5536.760	85.23	1.01	86.24	N/A	N/A	174	91	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

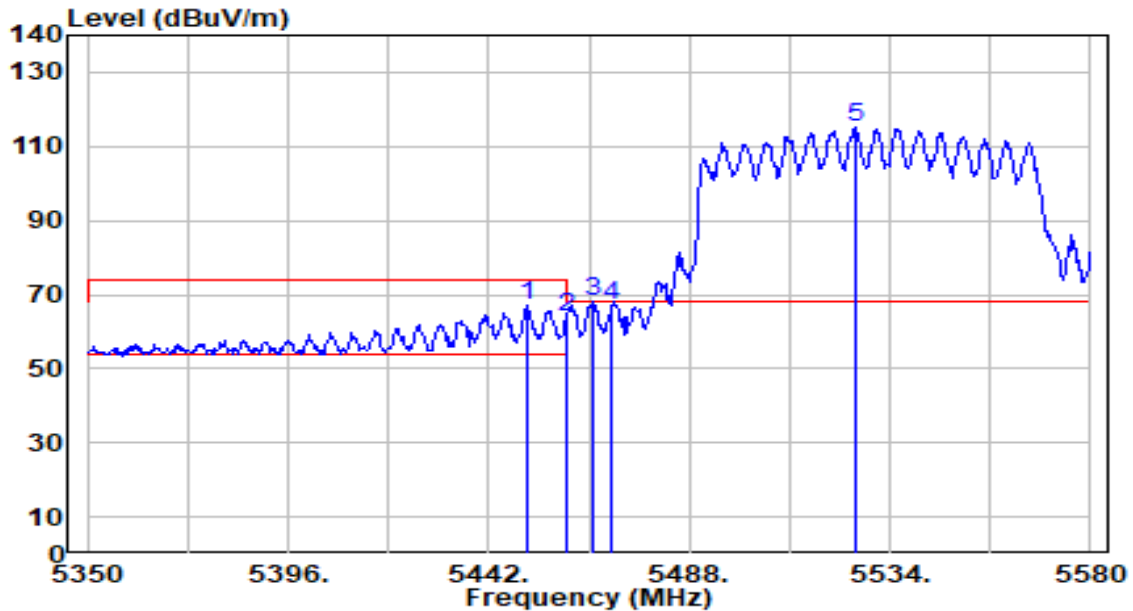


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.740	66.72	0.62	67.35	-6.65	74.00	184	192	Peak
2	5460.000	63.31	0.66	63.97	-10.03	74.00	184	192	Peak
3	* 5465.920	67.32	0.69	68.01	-0.19	68.20	184	192	Peak
4	5470.000	66.35	0.71	67.06	-1.14	68.20	184	192	Peak
5	5525.950	113.96	0.96	114.92	N/A	N/A	184	192	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

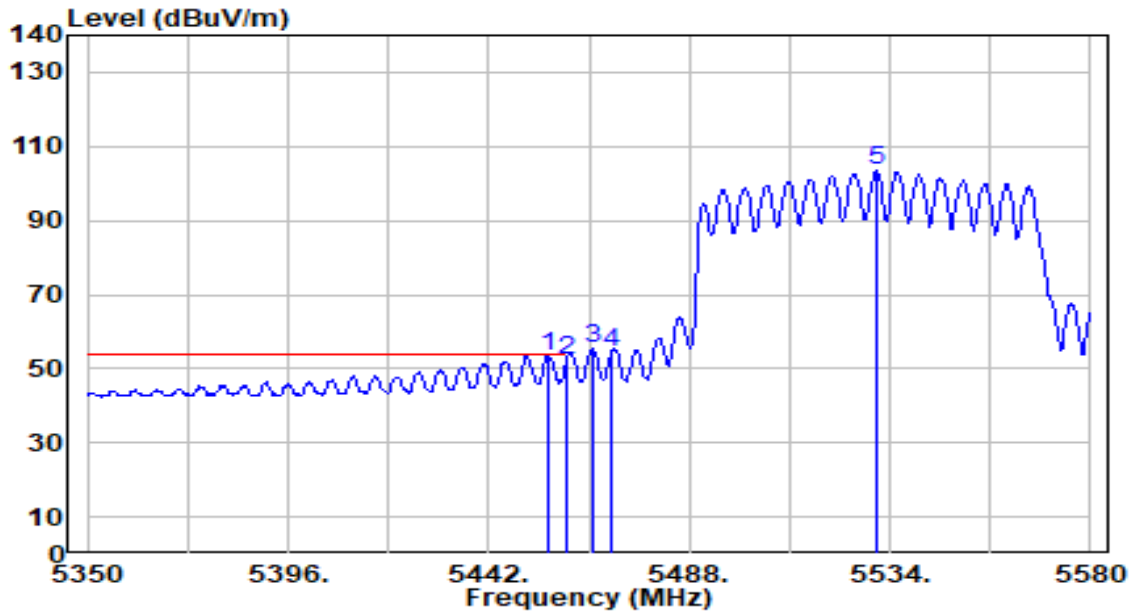


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.800	52.93	0.64	53.58	-0.42	54.00	184	192	Average
2		5460.000	51.71	0.66	52.37	-1.63	54.00	184	192	Average
3		5465.690	54.72	0.69	55.40	N/A	N/A	184	192	Average
4		5470.000	53.64	0.71	54.34	N/A	N/A	184	192	Average
5		5530.780	102.32	0.98	103.30	N/A	N/A	184	192	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

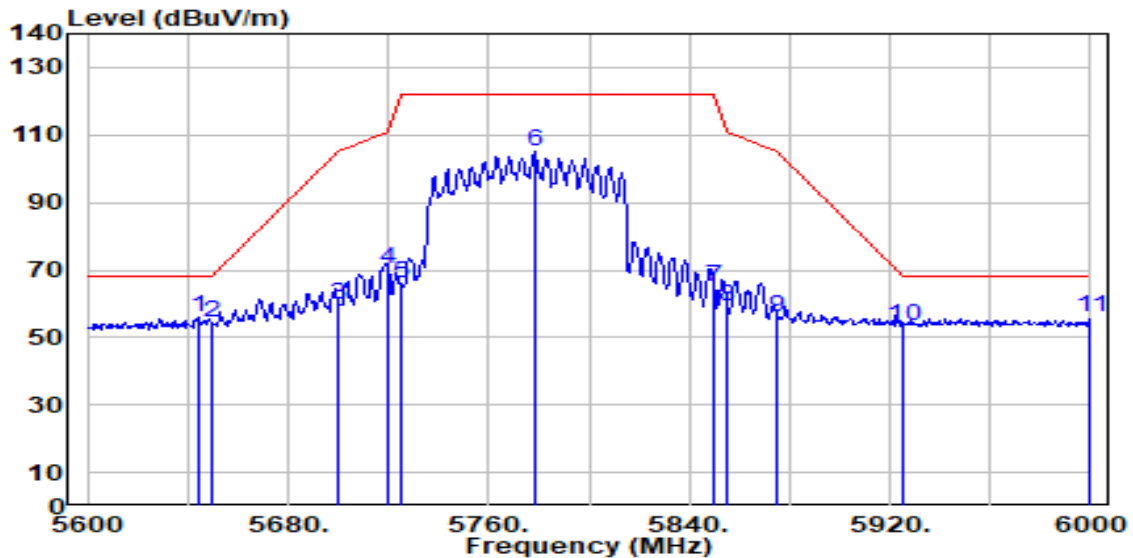


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5644.400	54.38	1.52	55.89	-12.31	68.20	183	168	Peak
2	5650.000	53.03	1.54	54.57	-13.63	68.20	183	168	Peak
3	5700.000	58.03	1.78	59.81	-45.39	105.20	183	168	Peak
4	5720.000	68.22	1.87	70.09	-40.71	110.80	183	168	Peak
5	5725.000	63.99	1.89	65.88	-56.32	122.20	183	168	Peak
6	5778.400	103.23	2.14	105.37	N/A	N/A	183	168	Peak
7	5850.000	62.50	2.25	64.76	-57.44	122.20	183	168	Peak
8	5855.000	56.74	2.25	59.00	-51.80	110.80	183	168	Peak
9	5875.000	53.72	2.26	55.98	-49.22	105.20	183	168	Peak
10	5925.000	51.28	2.27	53.54	-14.66	68.20	183	168	Peak
11	* 6000.000	53.66	2.28	55.94	-12.26	68.20	183	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-02-05
Factor	DRH18-E	Temp. / Humidity	21°C /62%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

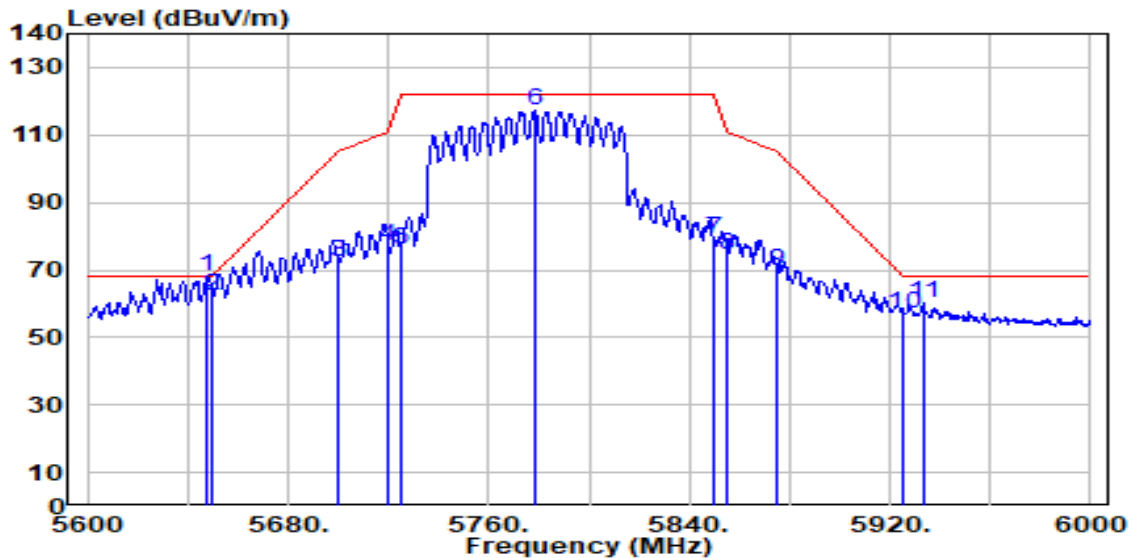

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.000	66.57	1.53	68.10	-0.10	68.20	181	156	Peak
2		5650.000	60.91	1.54	62.45	-5.75	68.20	181	156	Peak
3		5700.000	70.60	1.78	72.38	-32.82	105.20	181	156	Peak
4		5720.000	75.31	1.87	77.18	-33.62	110.80	181	156	Peak
5		5725.000	74.21	1.89	76.10	-46.10	122.20	181	156	Peak
6		5778.800	115.22	2.14	117.36	N/A	N/A	181	156	Peak
7		5850.000	76.88	2.25	79.13	-43.07	122.20	181	156	Peak
8		5855.000	72.36	2.25	74.61	-36.19	110.80	181	156	Peak
9		5875.000	67.39	2.26	69.65	-35.55	105.20	181	156	Peak
10		5925.000	54.57	2.27	56.84	-11.36	68.20	181	156	Peak
11		5933.200	57.85	2.27	60.12	-8.08	68.20	181	156	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.