


Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz (Nss=3)		

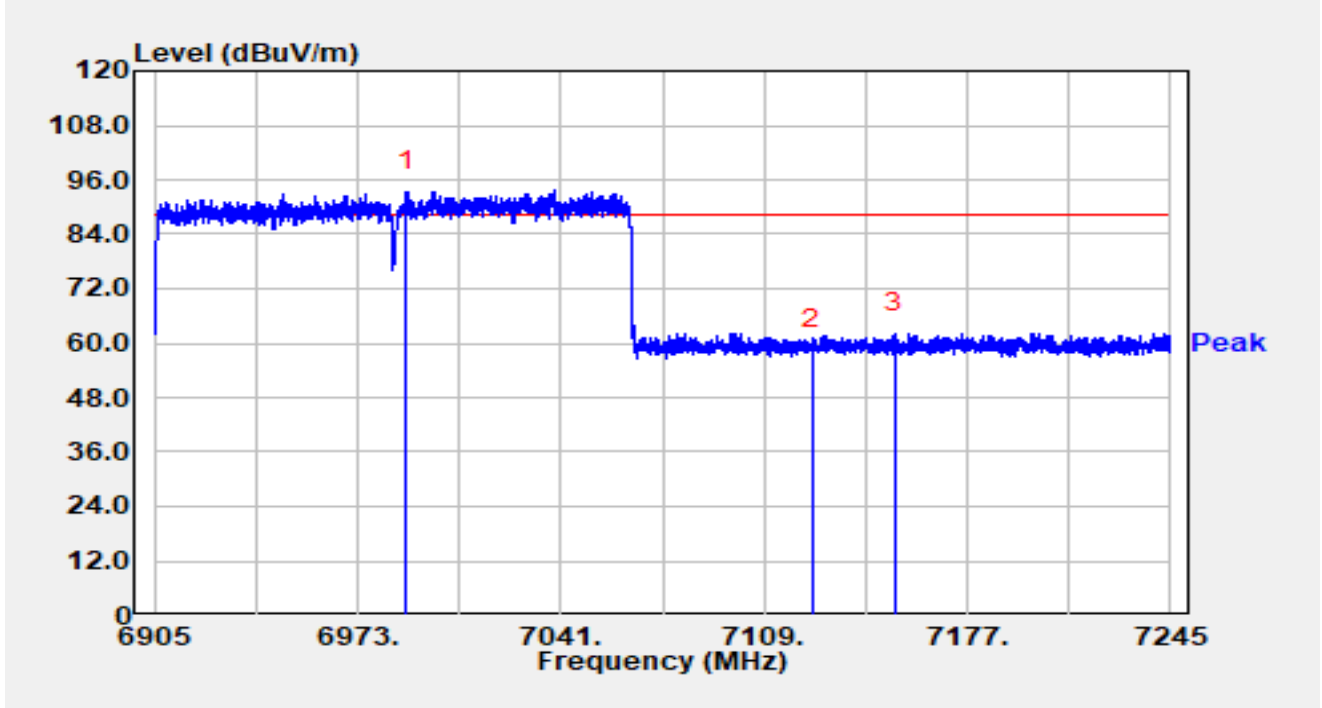


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6989.184	73.14	20.29	93.43	N/A	N/A	Peak
2		7125.000	38.42	20.42	58.84	-29.36	88.20	Peak
3	*	7152.656	41.74	20.37	62.12	-26.08	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz (Nss=3)		

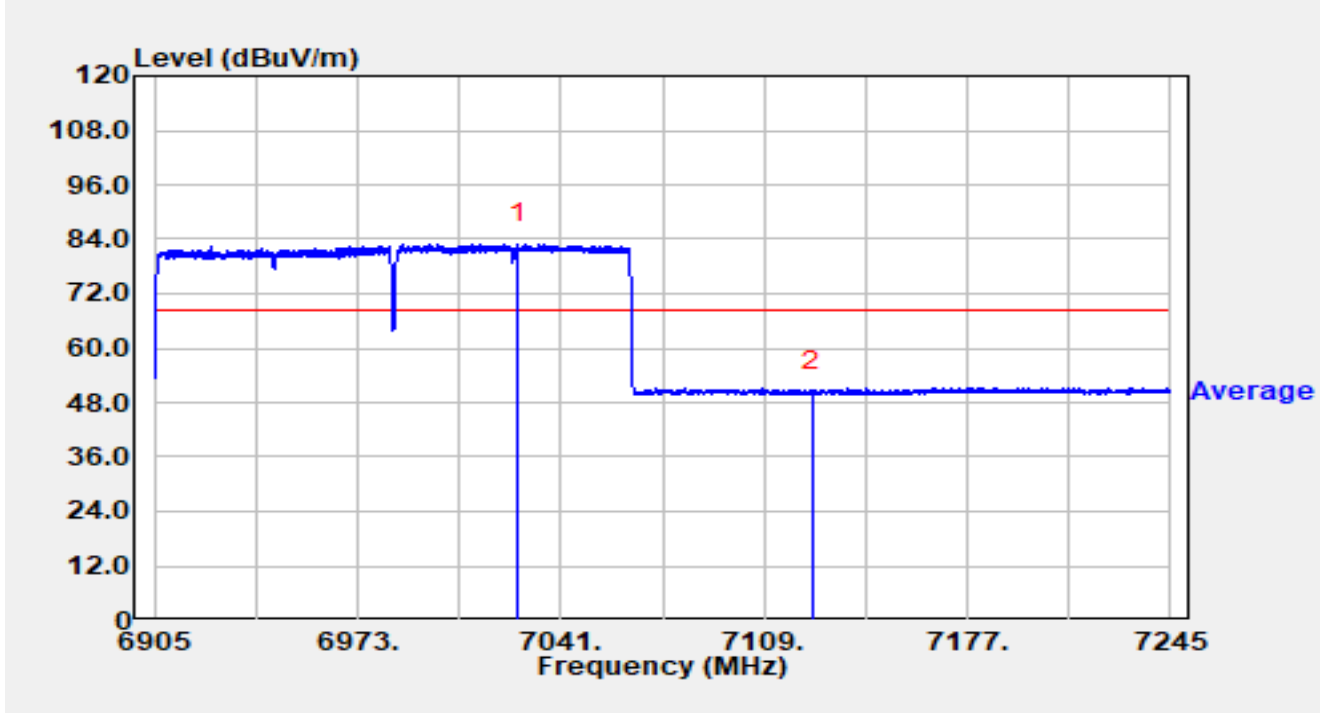


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7026.584	62.65	20.30	82.95	N/A	N/A	Average
2	*	7125.000	30.08	20.42	50.50	-17.70	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz (Nss=3)		

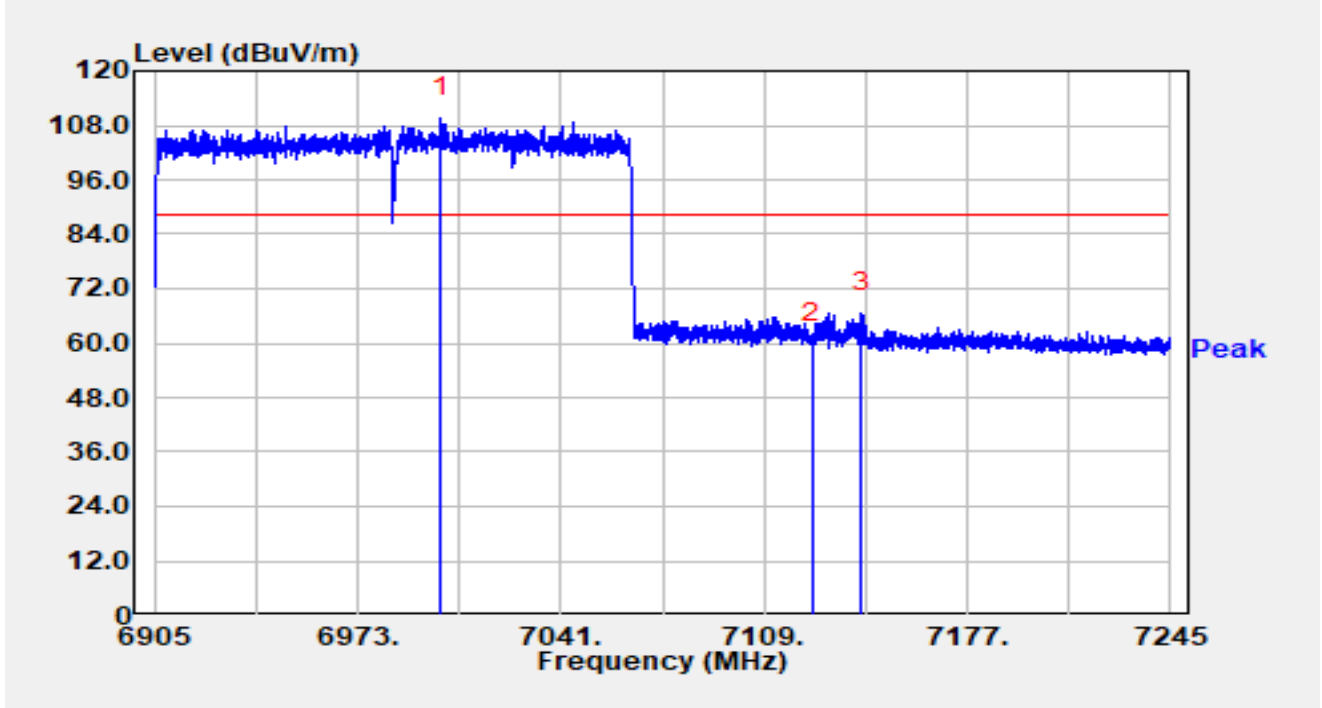


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7000.744	89.53	20.26	109.79	N/A	N/A	Peak
2		7125.000	39.45	20.42	59.88	-28.32	88.20	Peak
3	*	7141.742	46.38	20.40	66.77	-21.43	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 6985MHz (Nss=3)		

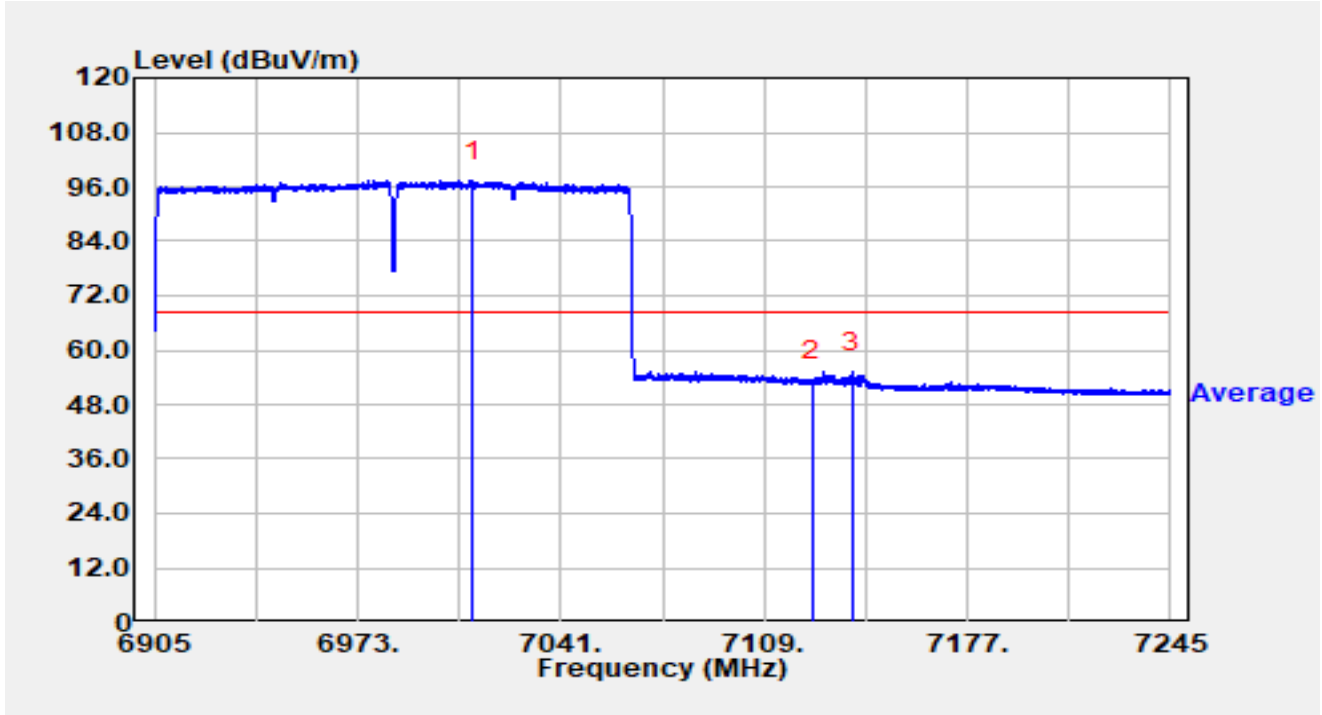


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7011.454	76.97	20.35	97.32	N/A	N/A	Average
2		7125.000	32.68	20.42	53.10	-15.10	68.20	Average
3	*	7138.614	34.76	20.42	55.18	-13.02	68.20	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz (Nss=3)		

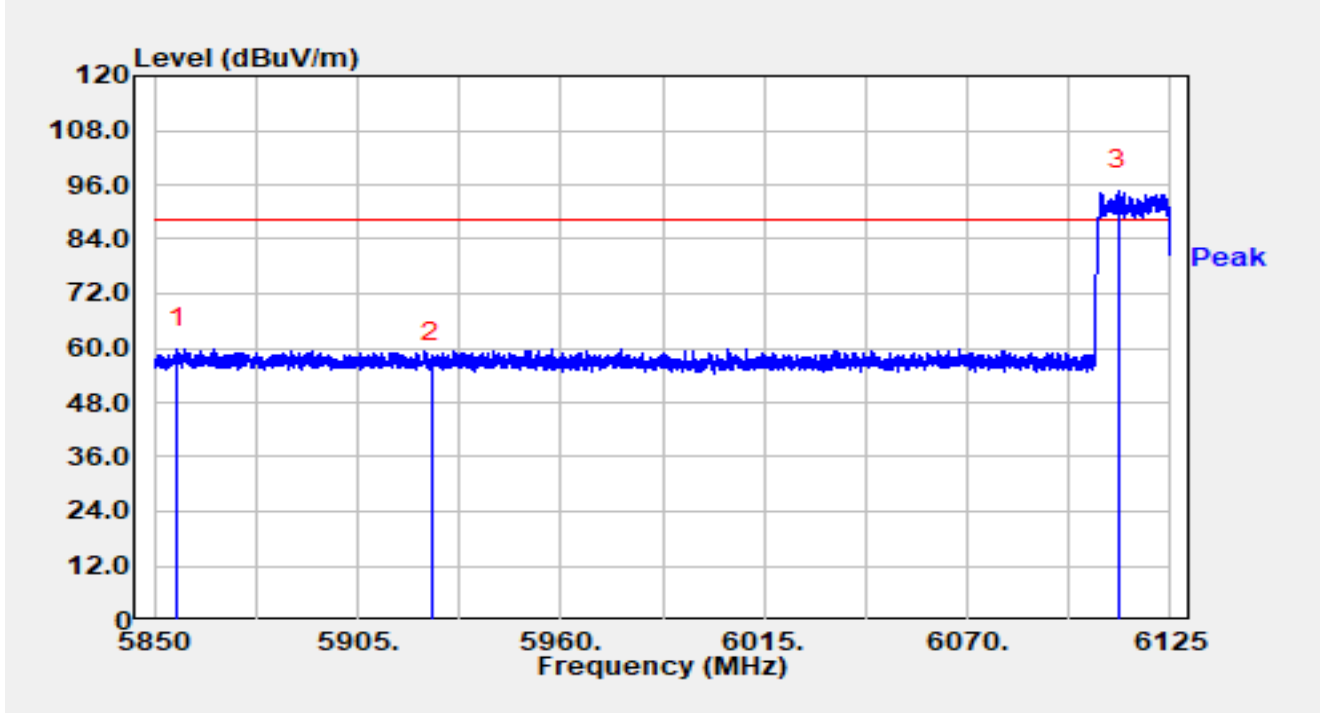


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5856.078	42.64	17.33	59.96	-28.24	88.20	Peak
2		5925.000	39.27	17.36	56.63	-31.57	88.20	Peak
3		6110.728	76.60	18.15	94.74	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz (Nss=3)		

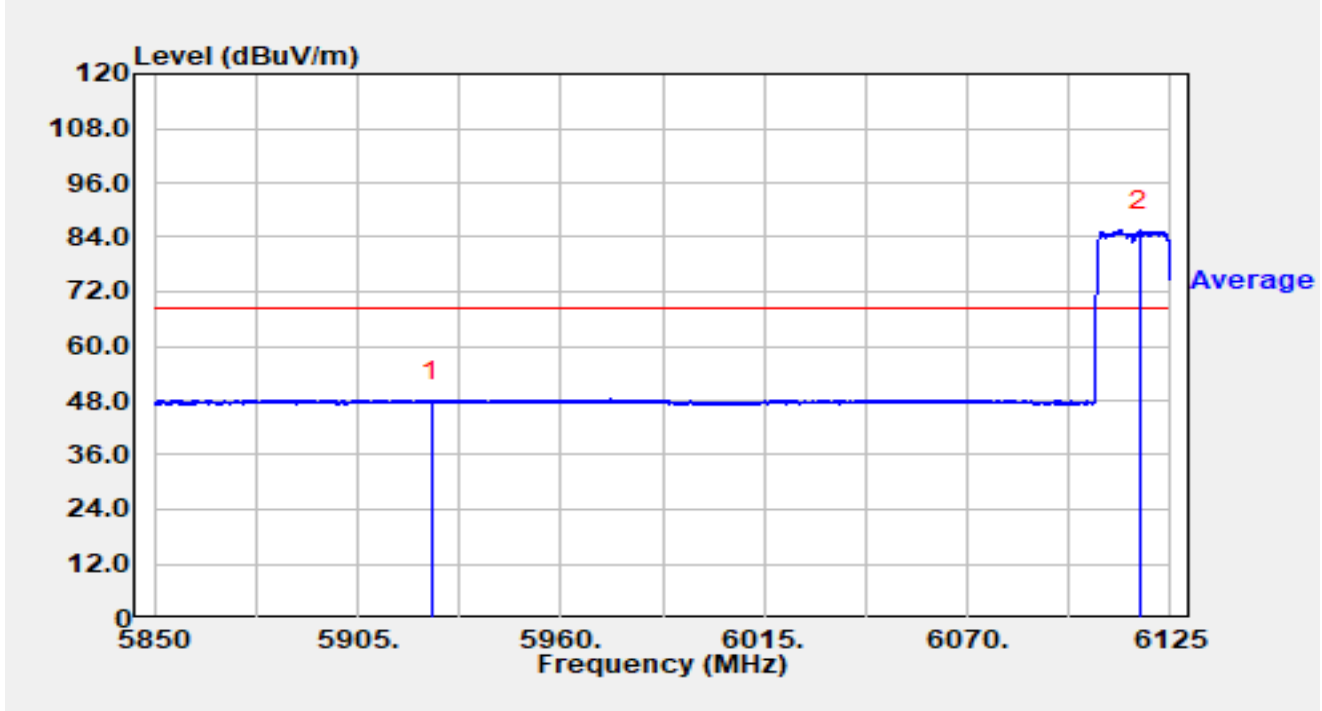


No	Mark	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector
1	*	5925.000	30.50	17.36	47.86	-20.34	68.20	Average
2		6116.695	67.21	18.26	85.47	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBuV/m) = Reading (dBuV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz (Nss=3)		

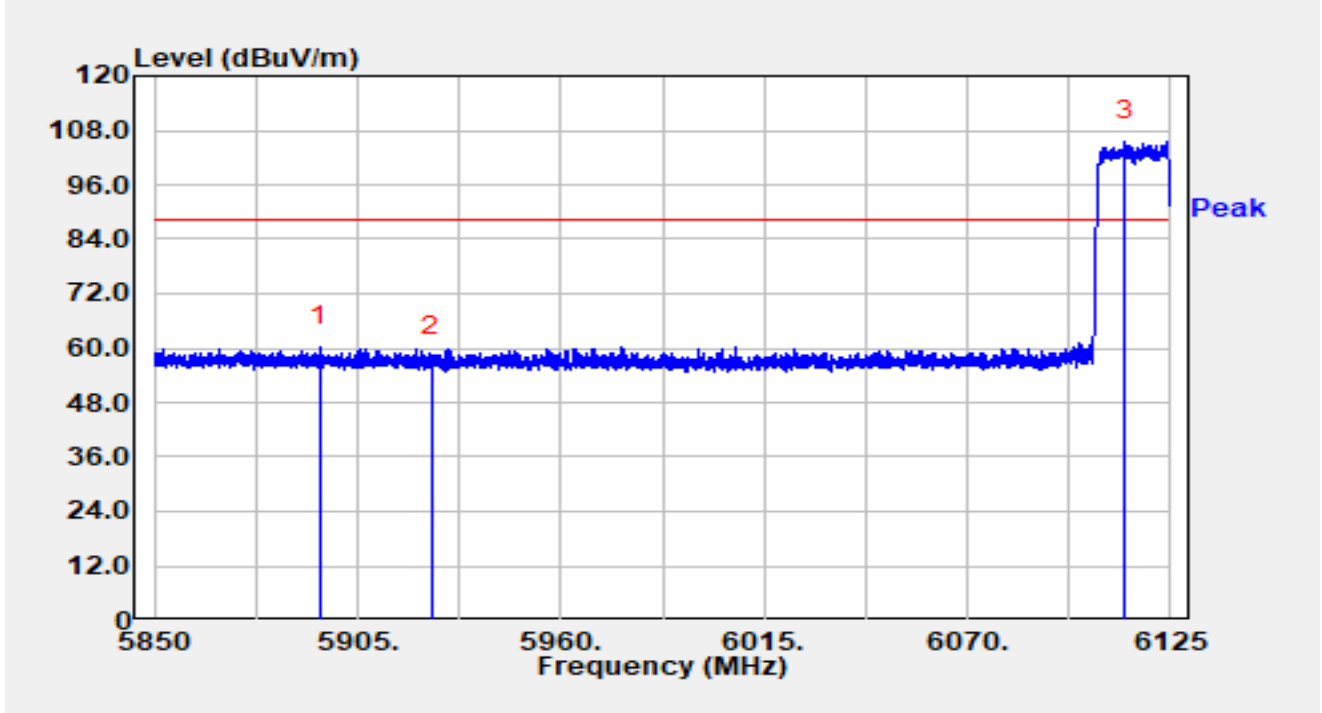


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5894.880	43.01	17.38	60.38	-27.82	88.20	Peak
2		5925.000	40.72	17.36	58.09	-30.11	88.20	Peak
3		6112.625	87.50	18.18	105.68	N/A	N/A	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 6115MHz (Nss=3)		

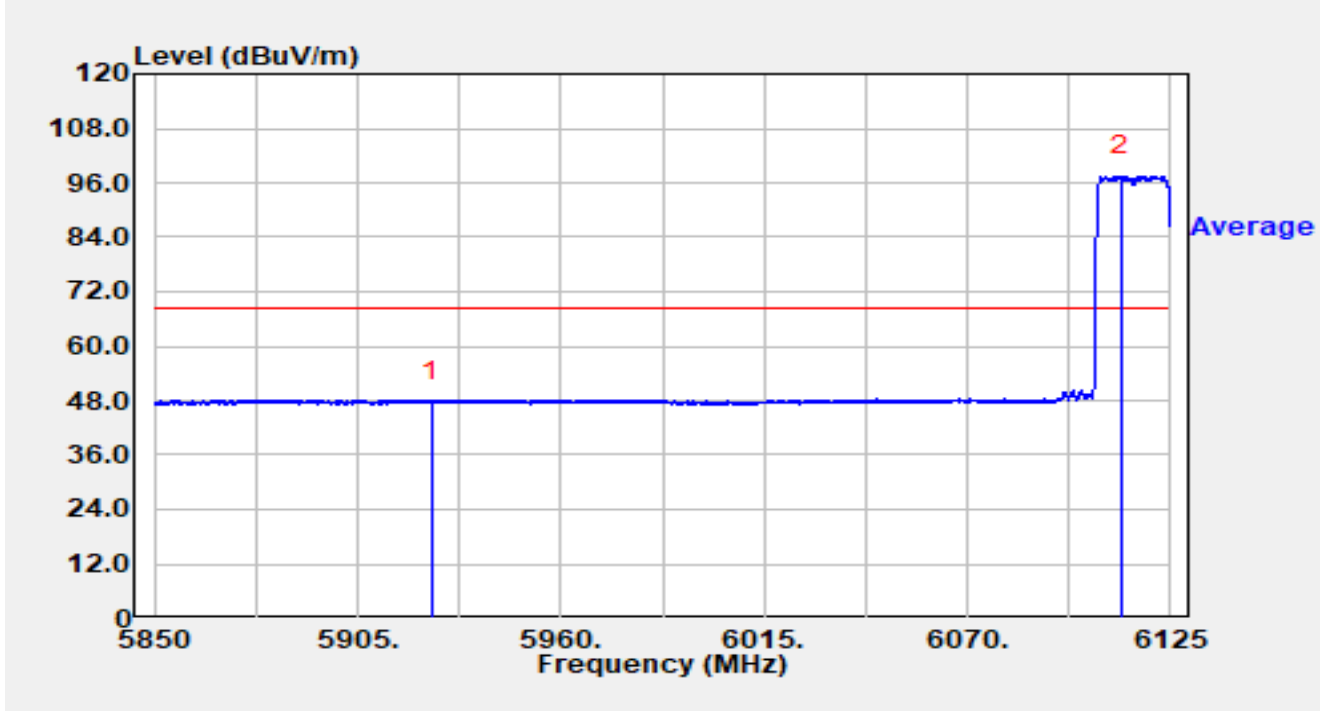


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	30.50	17.36	47.87	-20.33	68.20	Average
2		6111.498	79.38	18.16	97.55	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz (Nss=3)		

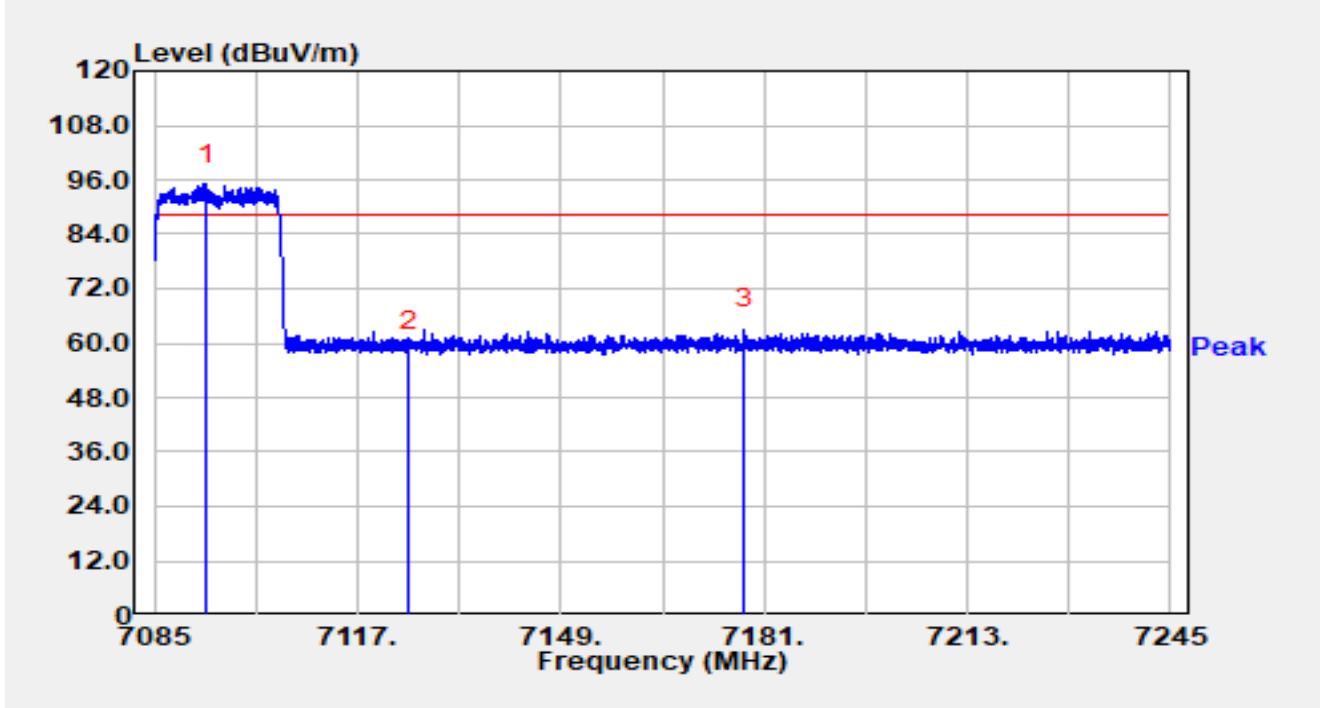


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7093.256	74.54	20.50	95.04	N/A	N/A	Peak
2		7125.000	37.93	20.42	58.35	-29.85	88.20	Peak
3	*	7177.960	42.32	20.72	63.04	-25.16	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz (Nss=3)		

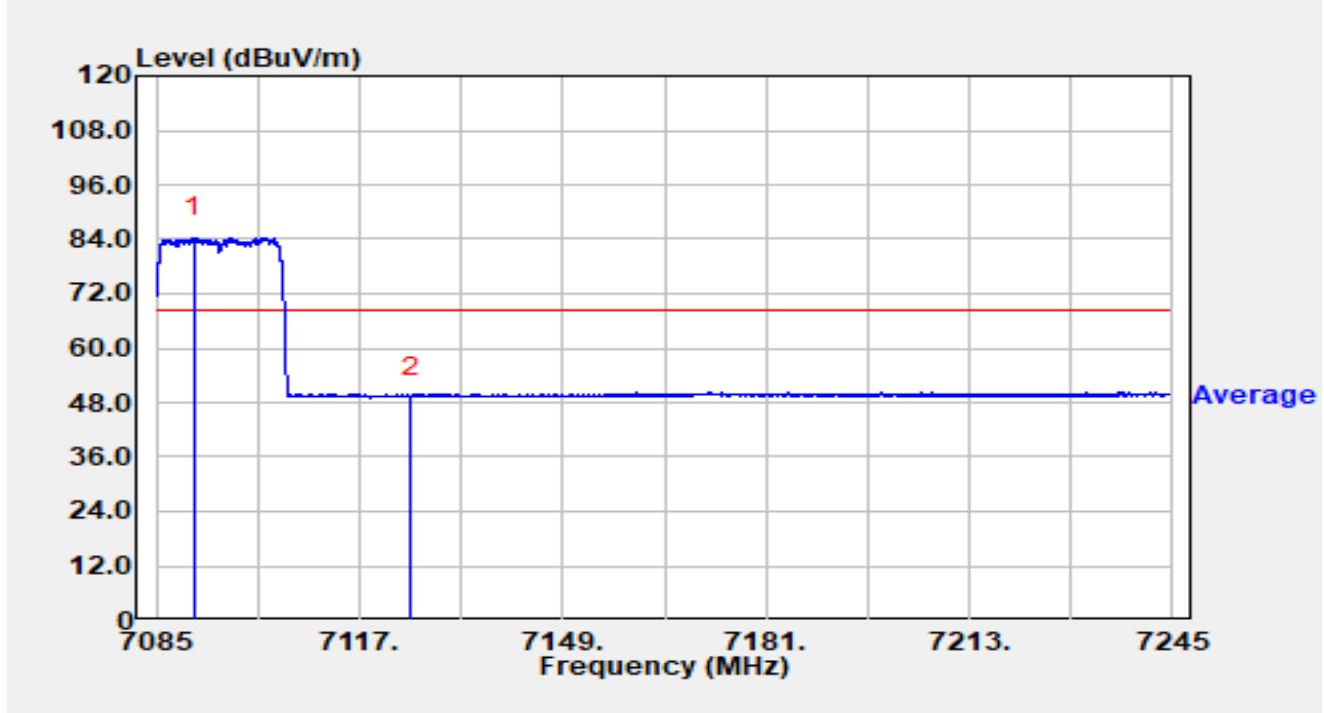


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7090.984	63.93	20.50	84.42	N/A	N/A	Average
2	*	7125.000	28.92	20.42	49.35	-18.85	68.20	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz (Nss=3)		

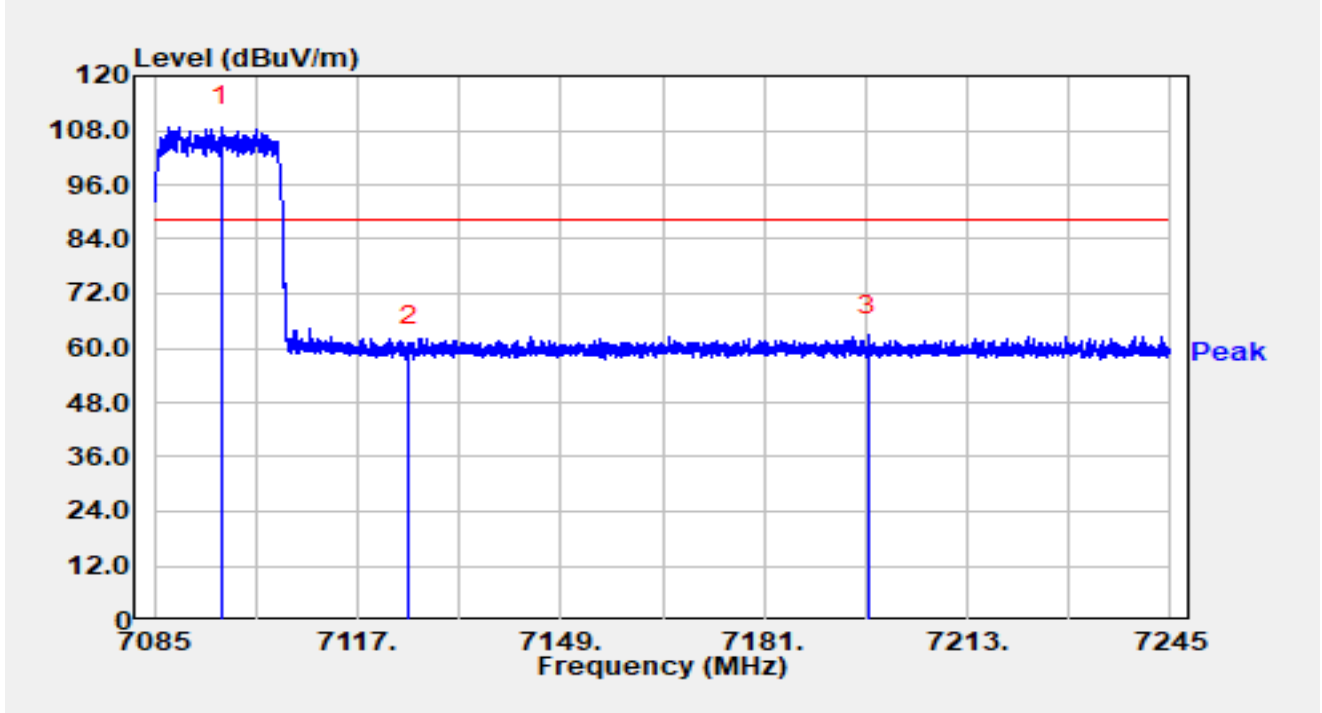


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7095.464	88.24	20.50	108.73	N/A	N/A	Peak
2		7125.000	39.85	20.42	60.27	-27.93	88.20	Peak
3	*	7197.448	42.27	20.65	62.92	-25.28	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 7095MHz (Nss=3)		

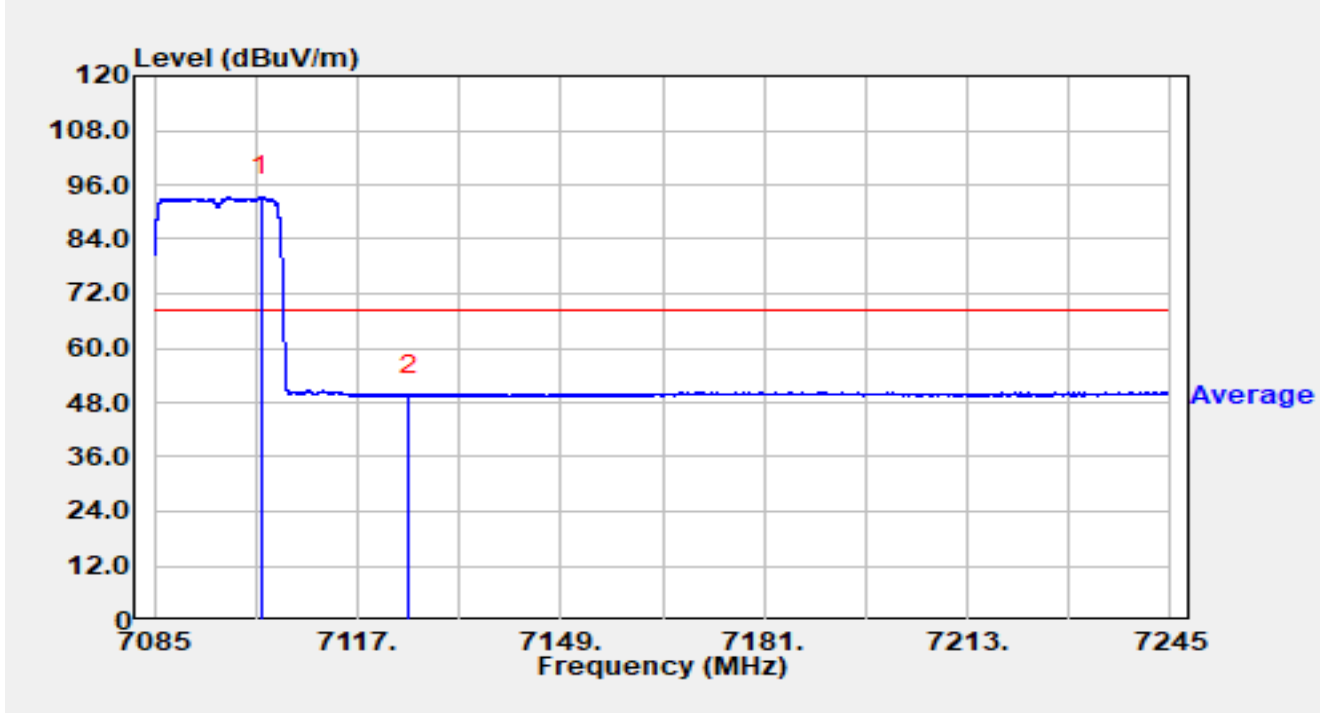


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.848	72.86	20.49	93.36	N/A	N/A	Average
2	*	7125.000	29.27	20.42	49.69	-18.51	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz (Nss=3)		

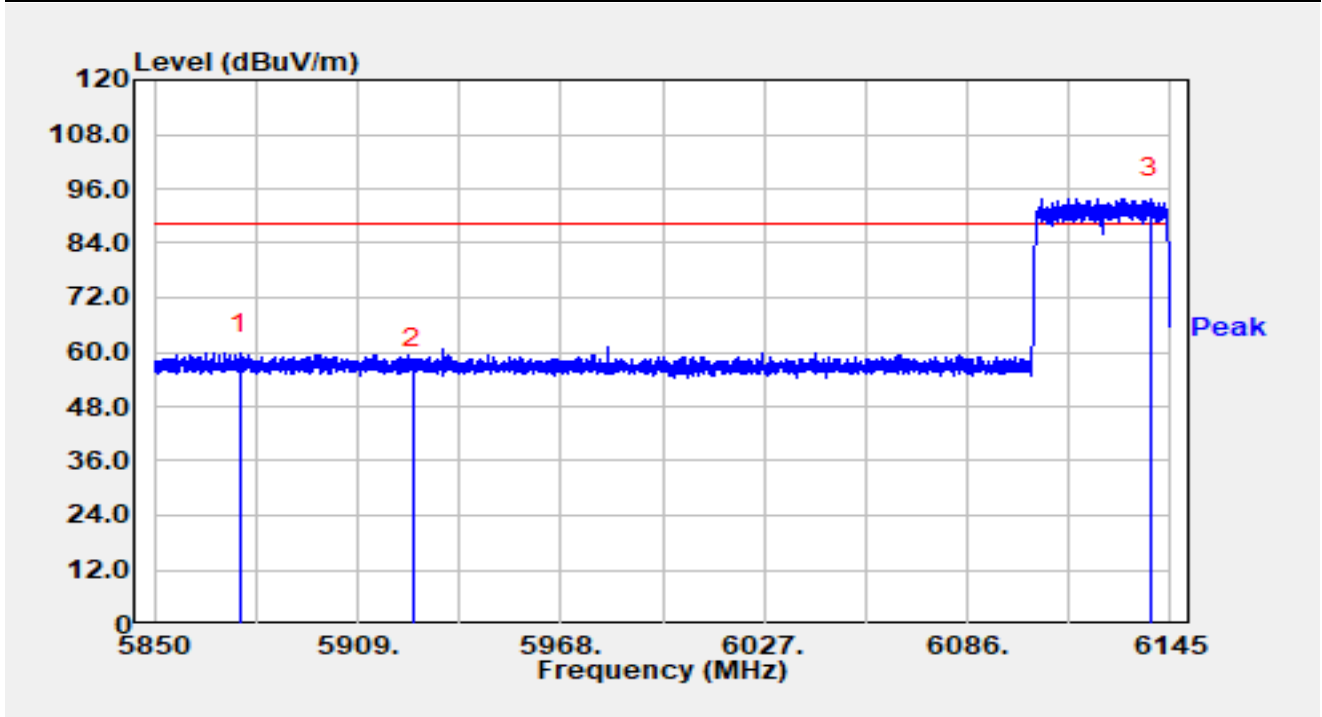


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5874.957	42.33	17.38	59.71	-28.49	88.20	Peak
2		5925.000	38.85	17.36	56.21	-31.99	88.20	Peak
3		6139.307	75.46	18.43	93.89	N/A	N/A	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz (Nss=3)		

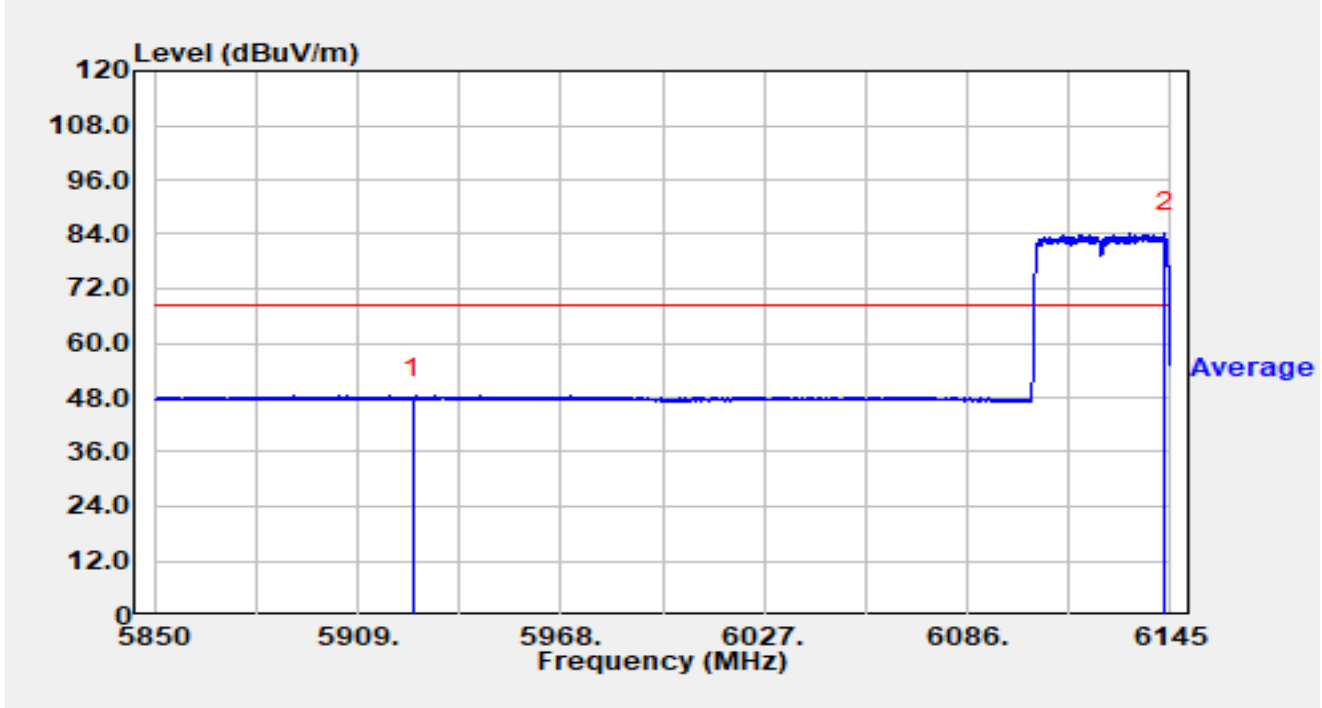


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	30.37	17.36	47.73	-20.47	68.20	Average
2		6143.437	65.83	18.45	84.28	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz (Nss=3)		

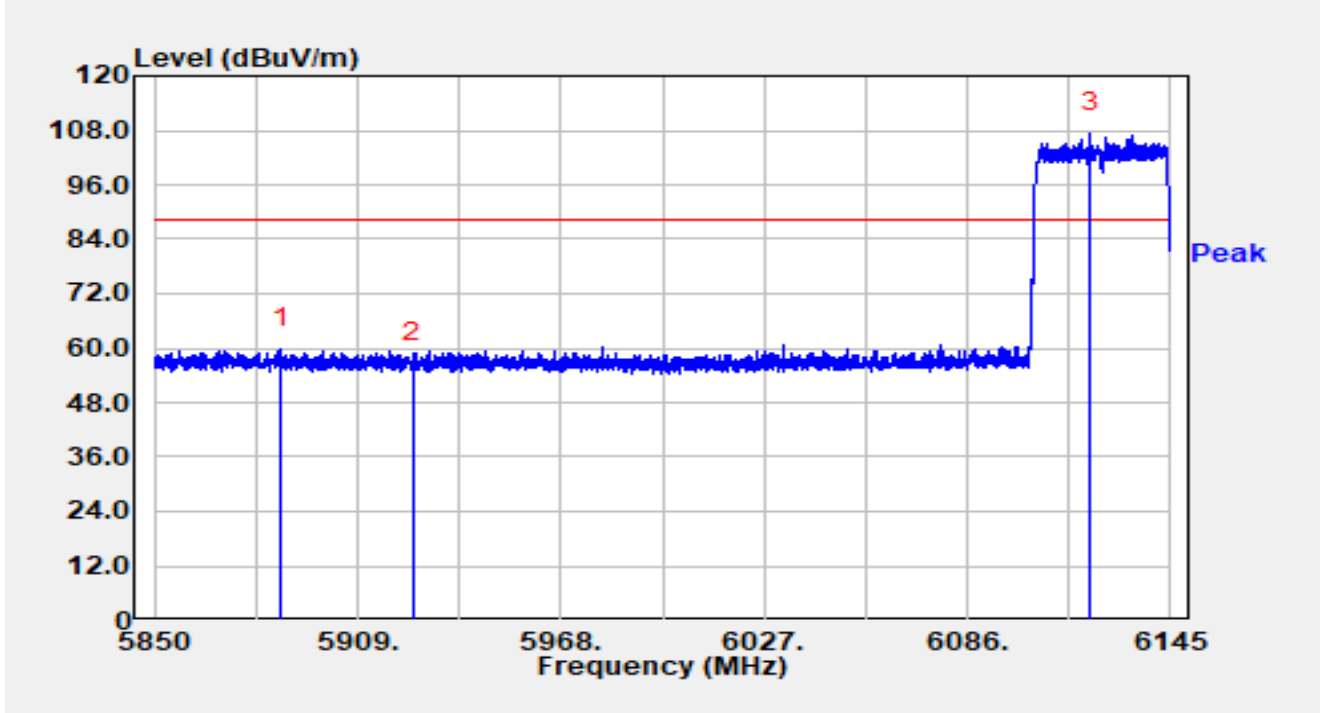


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5886.728	42.43	17.40	59.83	-28.37	88.20	Peak
2		5925.000	39.36	17.36	56.72	-31.48	88.20	Peak
3		6121.636	89.18	18.31	107.49	N/A	N/A	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 6125MHz (Nss=3)		

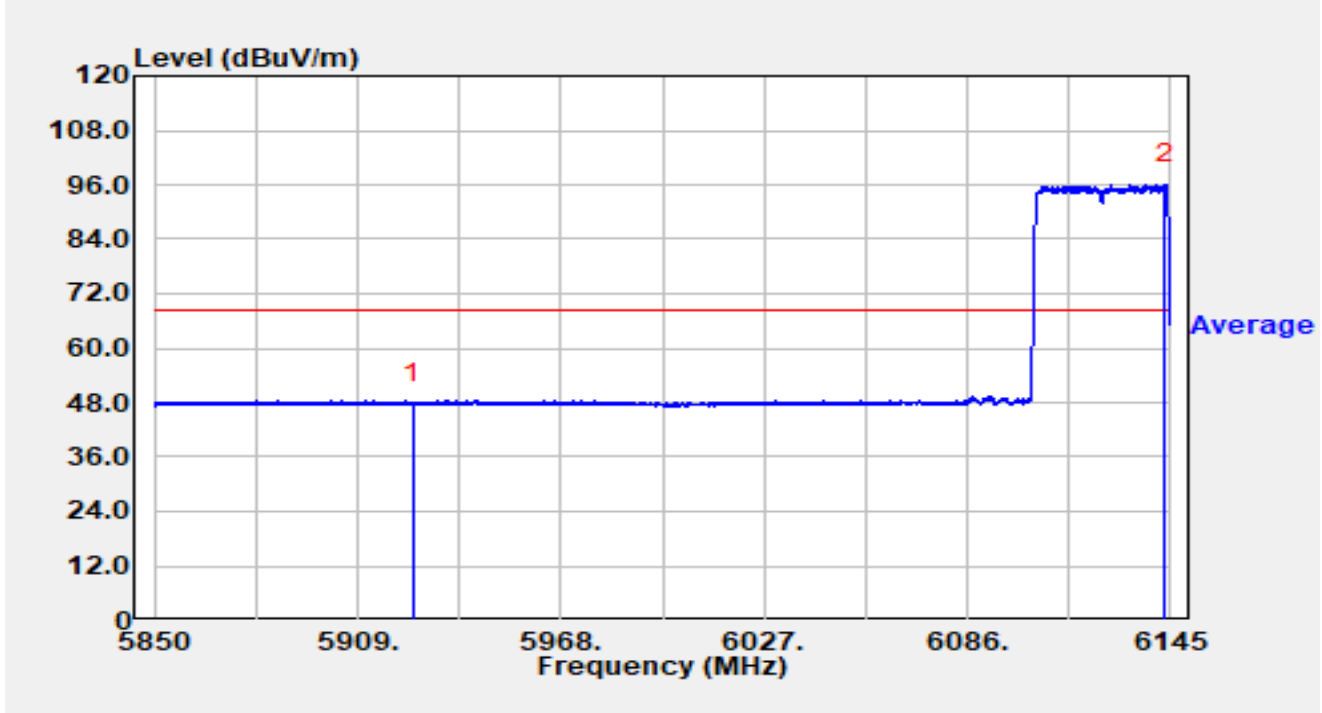


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	30.44	17.36	47.80	-20.40	68.20	Average
2		6143.466	77.77	18.45	96.22	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz (Nss=3)		

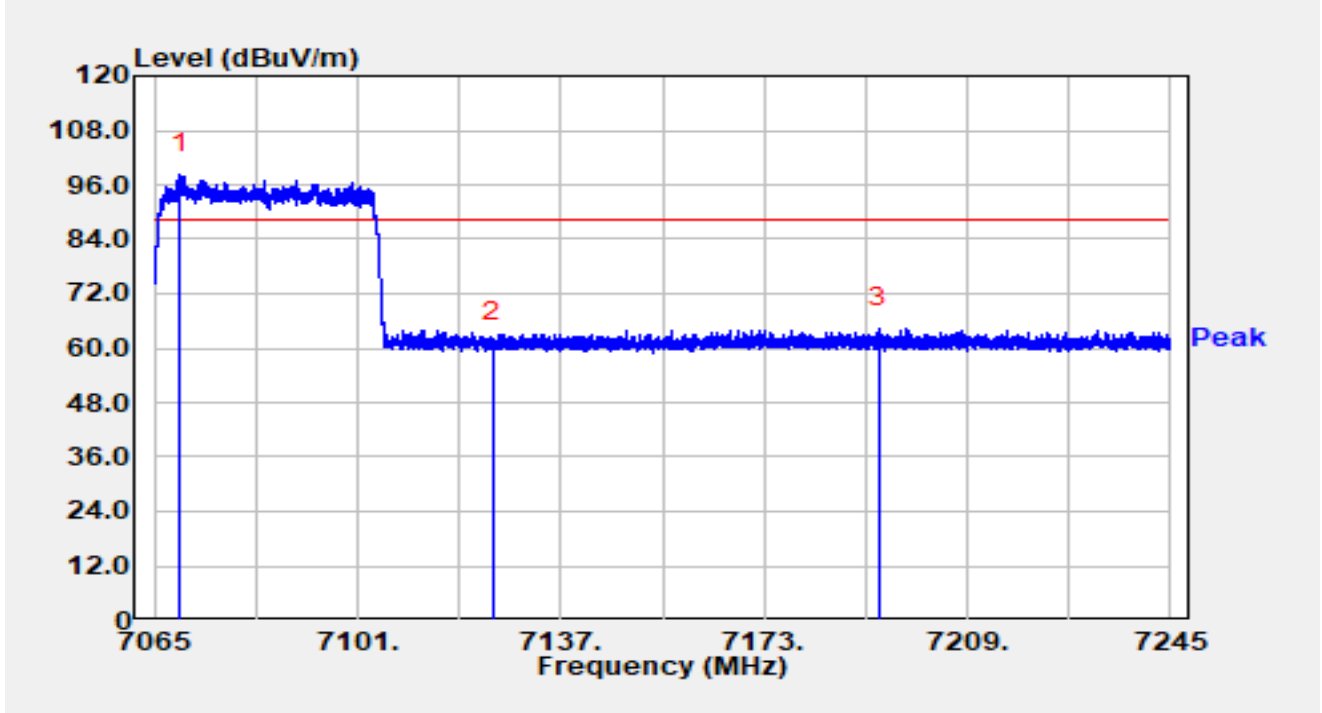


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7069.482	77.96	20.33	98.28	N/A	N/A	Peak
2		7125.000	41.06	20.42	61.49	-26.71	88.20	Peak
3	*	7193.250	43.84	20.67	64.51	-23.69	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz (Nss=3)		

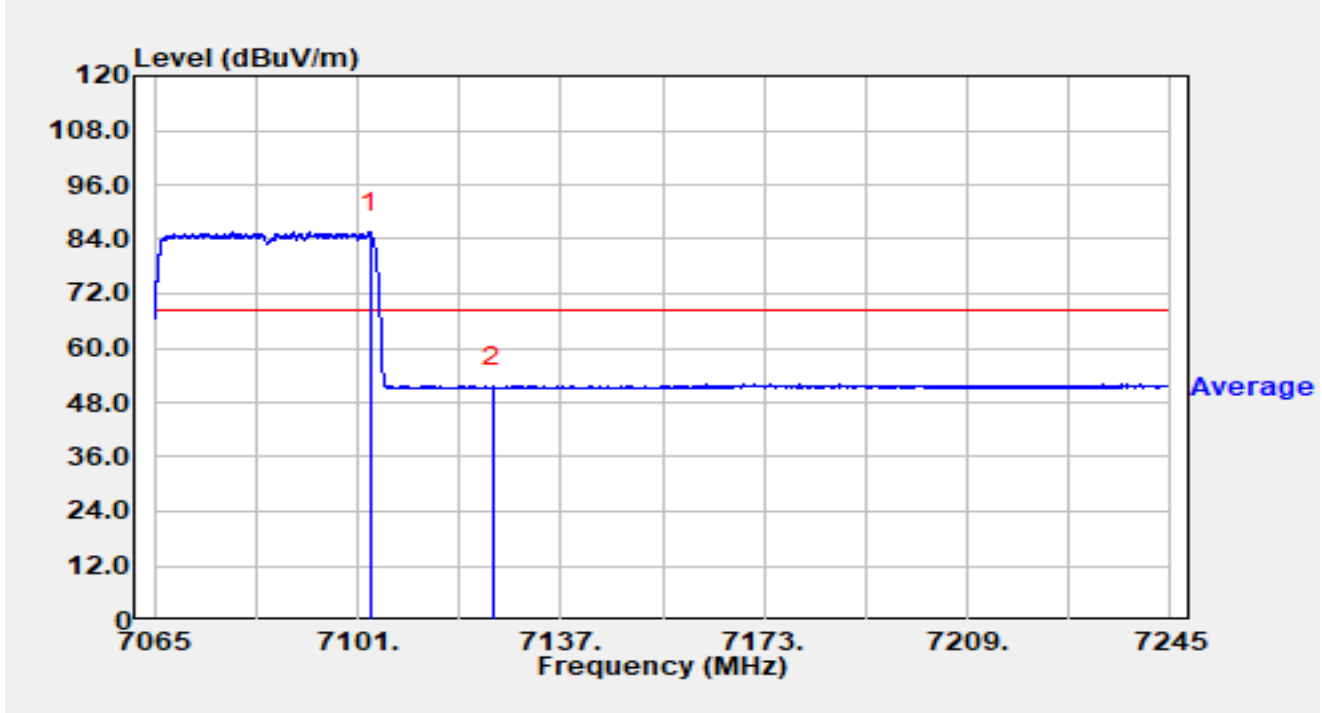


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7103.214	65.06	20.49	85.55	N/A	N/A	Average
2	*	7125.000	30.87	20.42	51.29	-16.91	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz (Nss=3)		

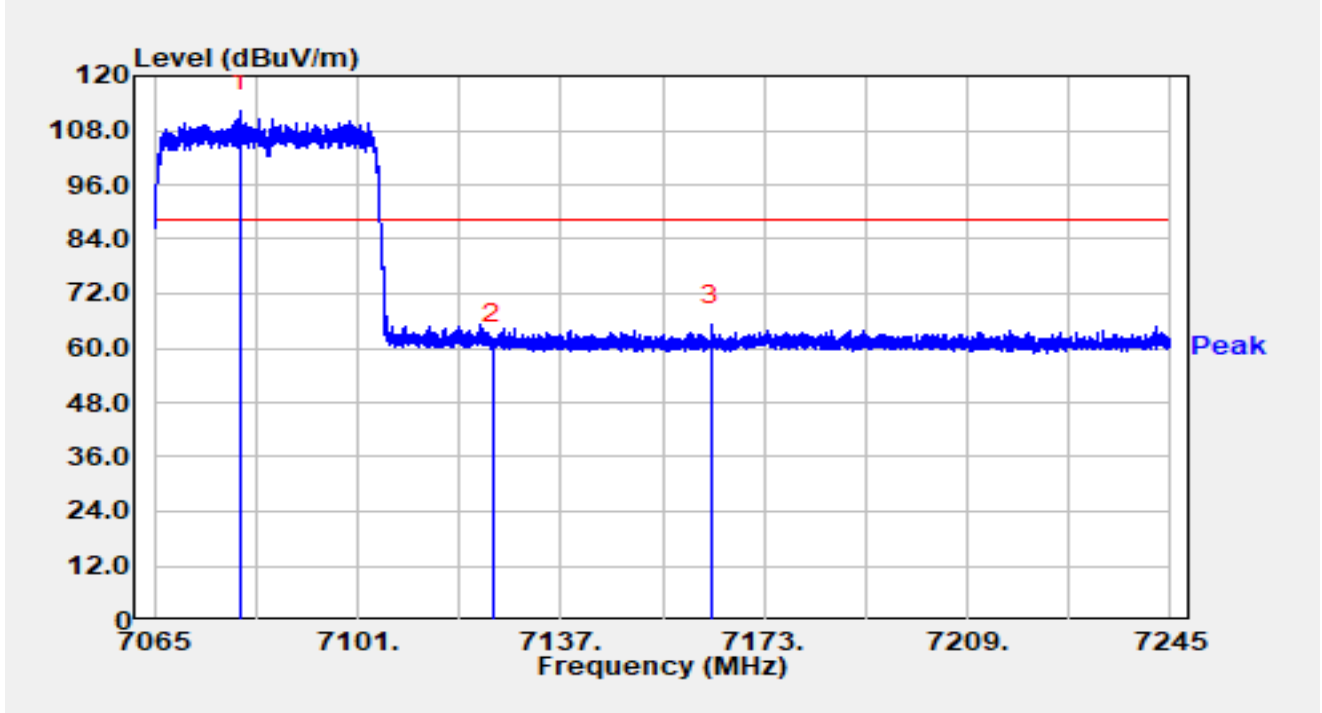


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7080.102	91.66	20.43	112.10	N/A	N/A	Peak
2		7125.000	40.67	20.42	61.09	-27.11	88.20	Peak
3	*	7163.640	44.39	20.60	64.99	-23.21	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 7085MHz (Nss=3)		

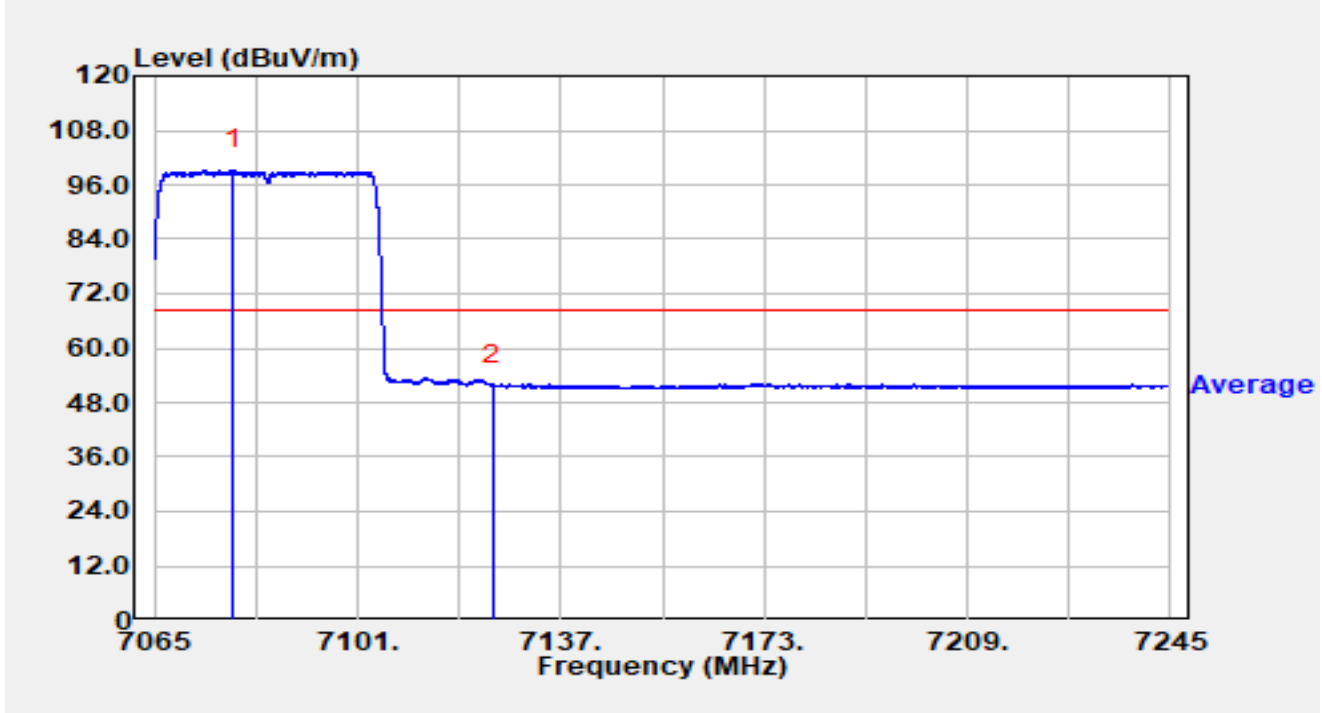


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7078.896	78.90	20.42	99.32	N/A	N/A	Average
2	*	7125.000	31.35	20.42	51.78	-16.42	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz (Nss=3)		

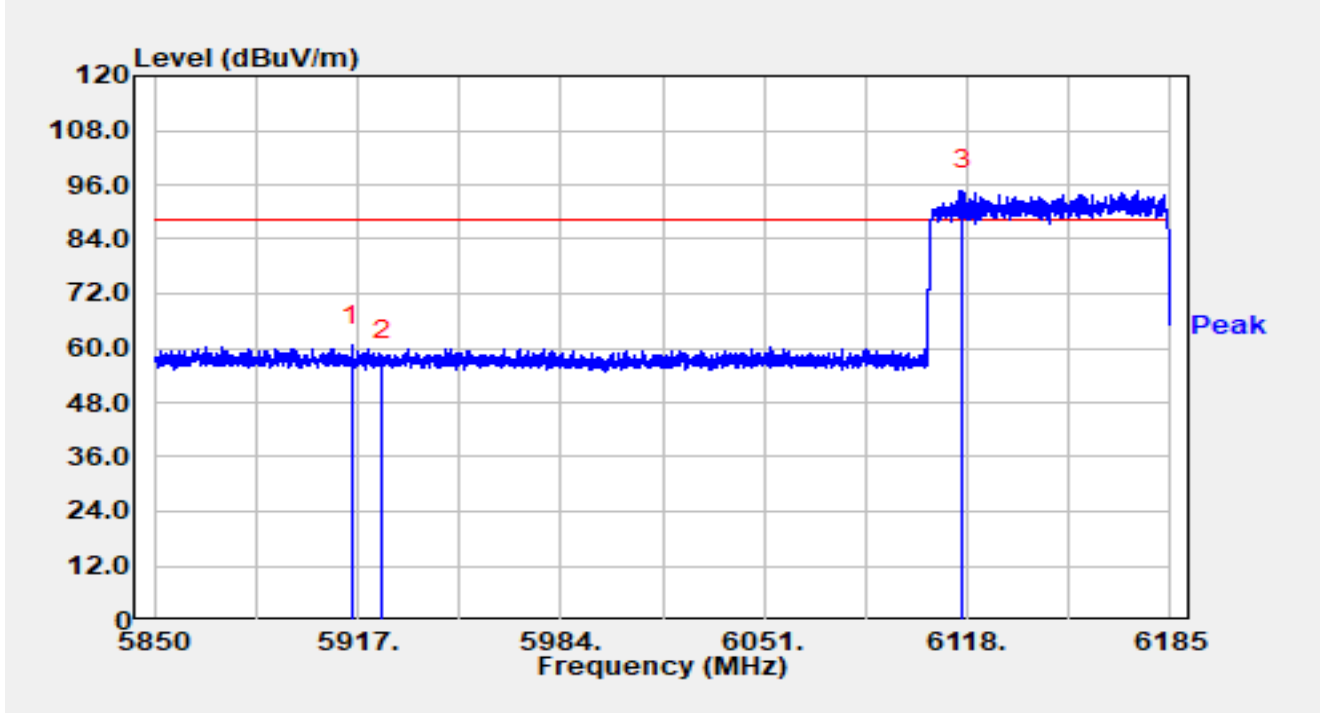


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.124	43.19	17.35	60.54	-27.66	88.20	Peak
2		5925.000	39.81	17.36	57.18	-31.02	88.20	Peak
3		6116.325	76.39	18.25	94.64	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz (Nss=3)		

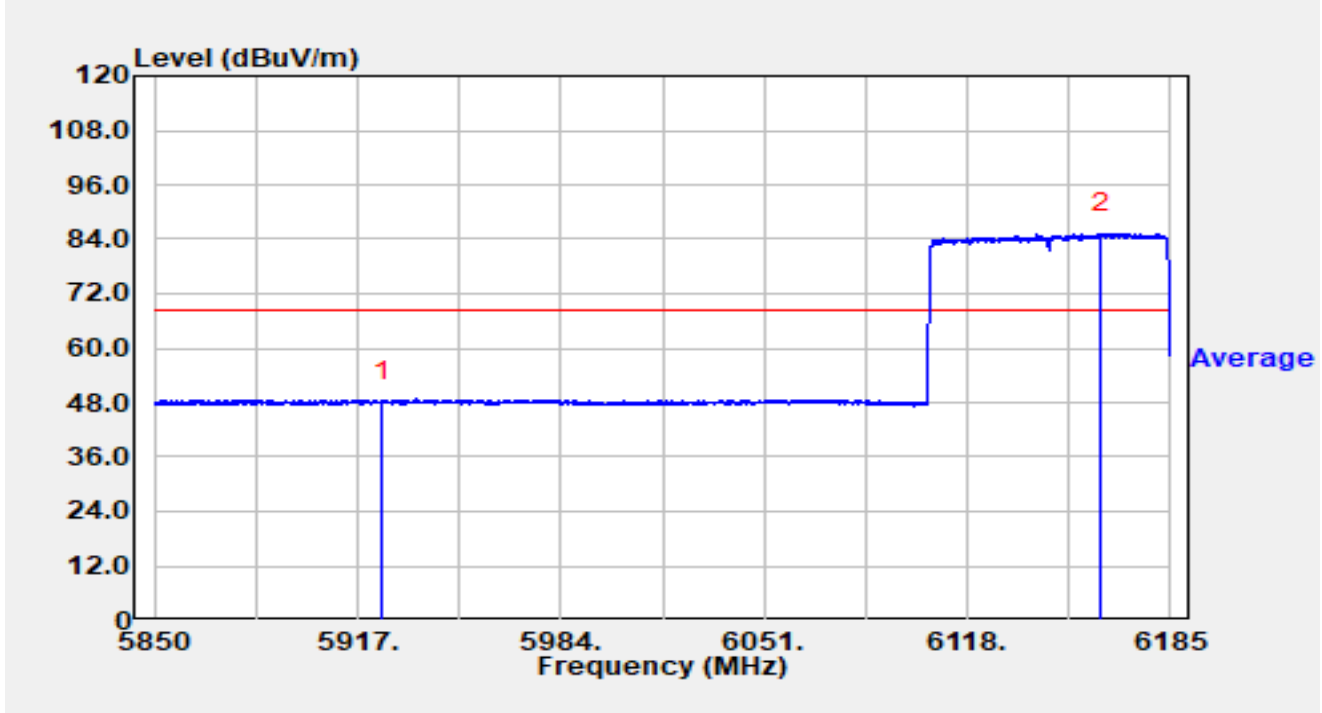


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	30.67	17.36	48.03	-20.17	68.20	Average
2		6162.187	66.62	18.57	85.19	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz (Nss=3)		

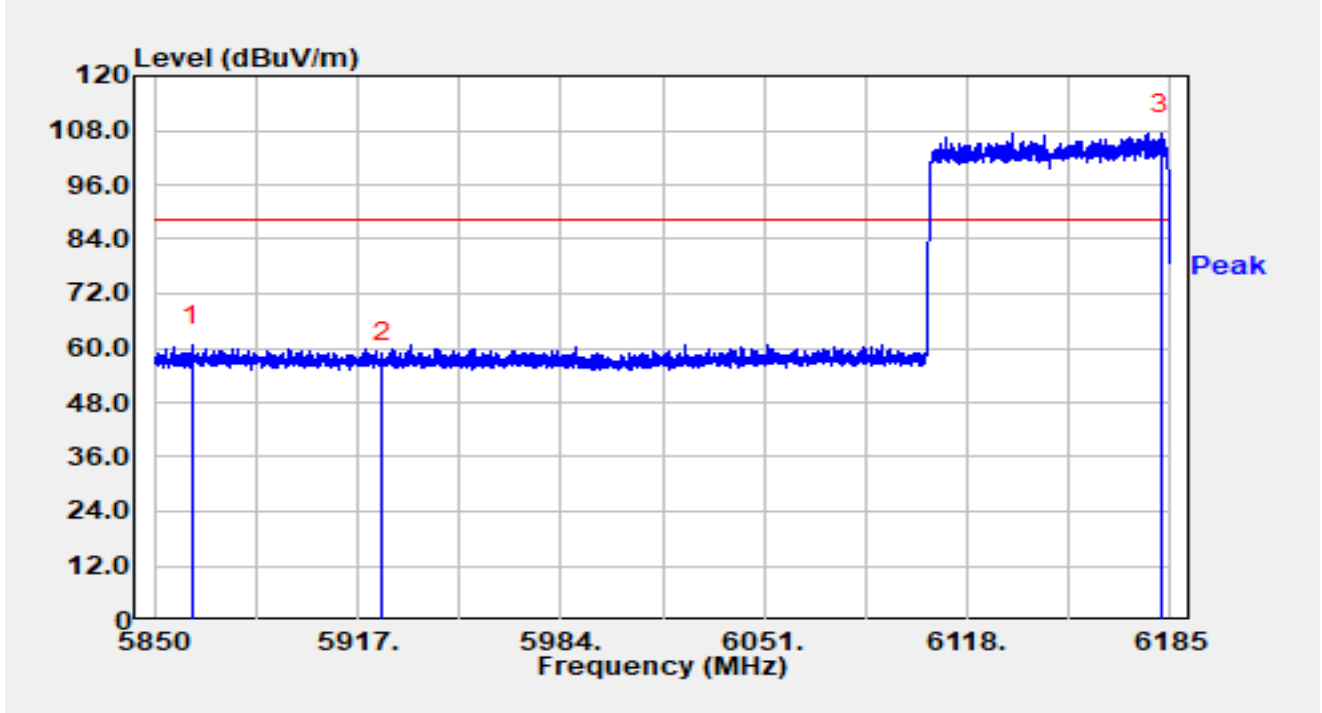


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5862.294	43.16	17.33	60.49	-27.71	88.20	Peak
2		5925.000	39.58	17.36	56.94	-31.26	88.20	Peak
3		6181.918	88.69	18.52	107.20	N/A	N/A	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 6145MHz (Nss=3)		

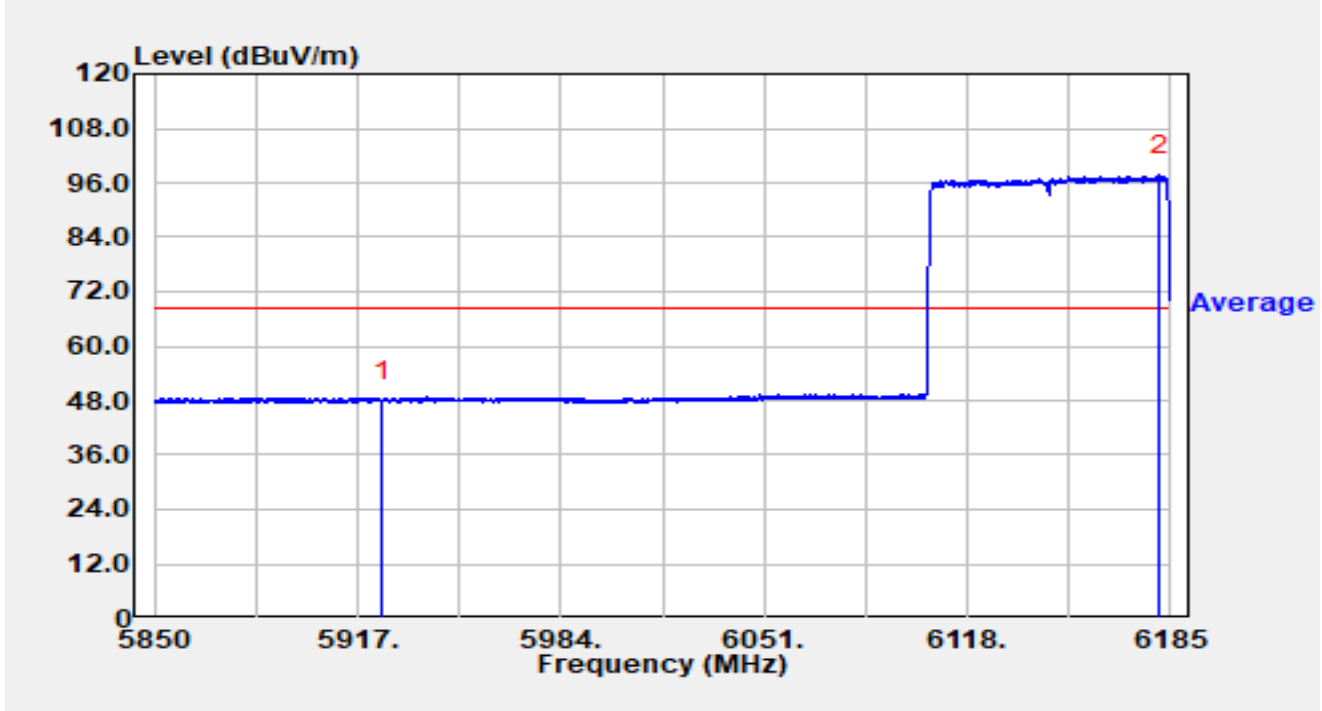


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	30.50	17.36	47.86	-20.34	68.20	Average
2		6181.583	79.11	18.52	97.62	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz (Nss=3)		

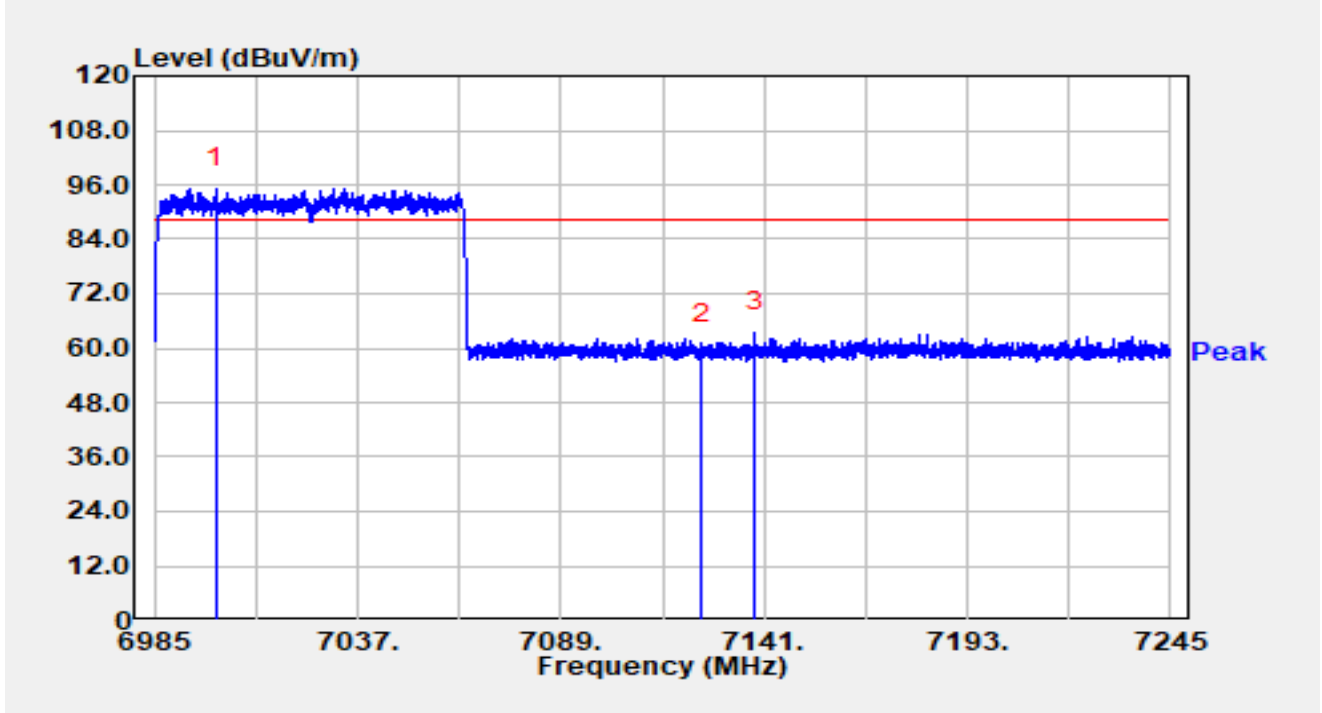


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7000.704	75.02	20.26	95.28	N/A	N/A	Peak
2		7125.000	40.34	20.42	60.77	-27.43	88.20	Peak
3	*	7138.634	43.10	20.42	63.52	-24.68	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz (Nss=3)		

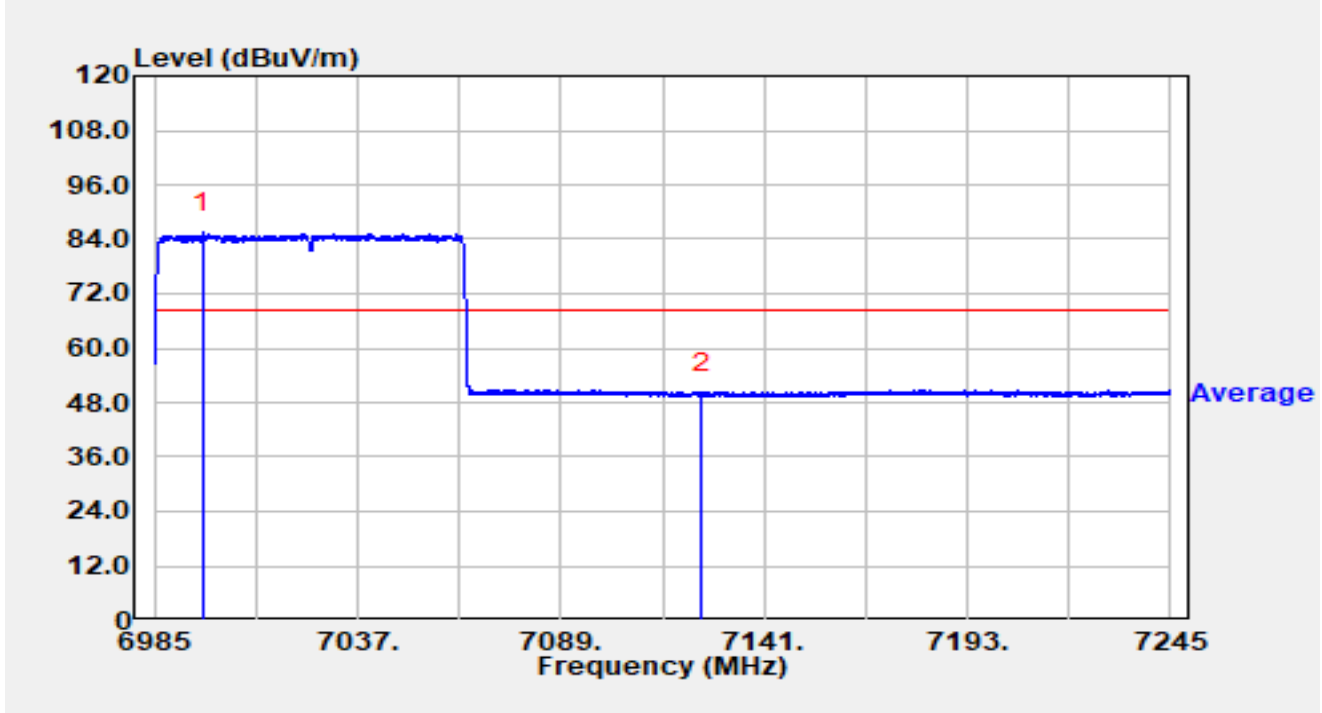


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6997.376	65.24	20.27	85.51	N/A	N/A	Average
2	*	7125.000	29.46	20.42	49.88	-18.32	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz (Nss=3)		

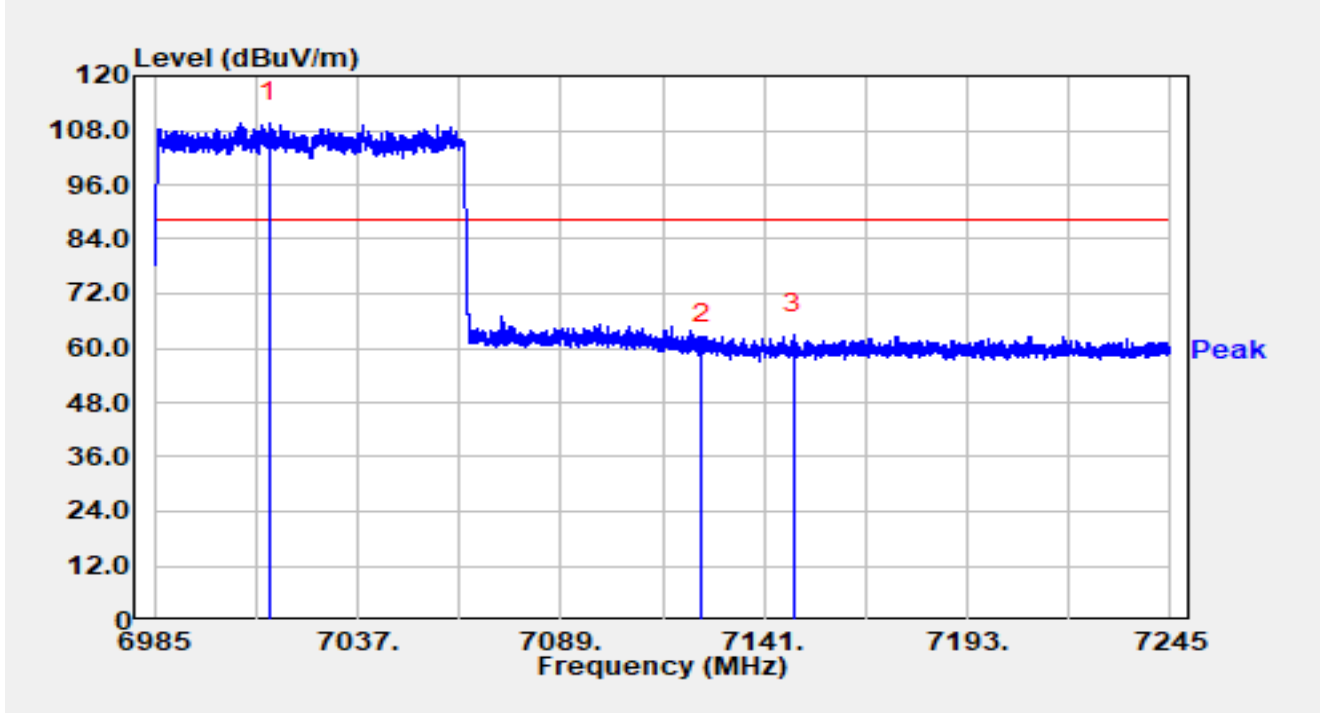


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7014.354	89.22	20.37	109.59	N/A	N/A	Peak
2		7125.000	40.65	20.42	61.08	-27.12	88.20	Peak
3	*	7148.566	42.66	20.37	63.03	-25.17	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 7025MHz (Nss=3)		

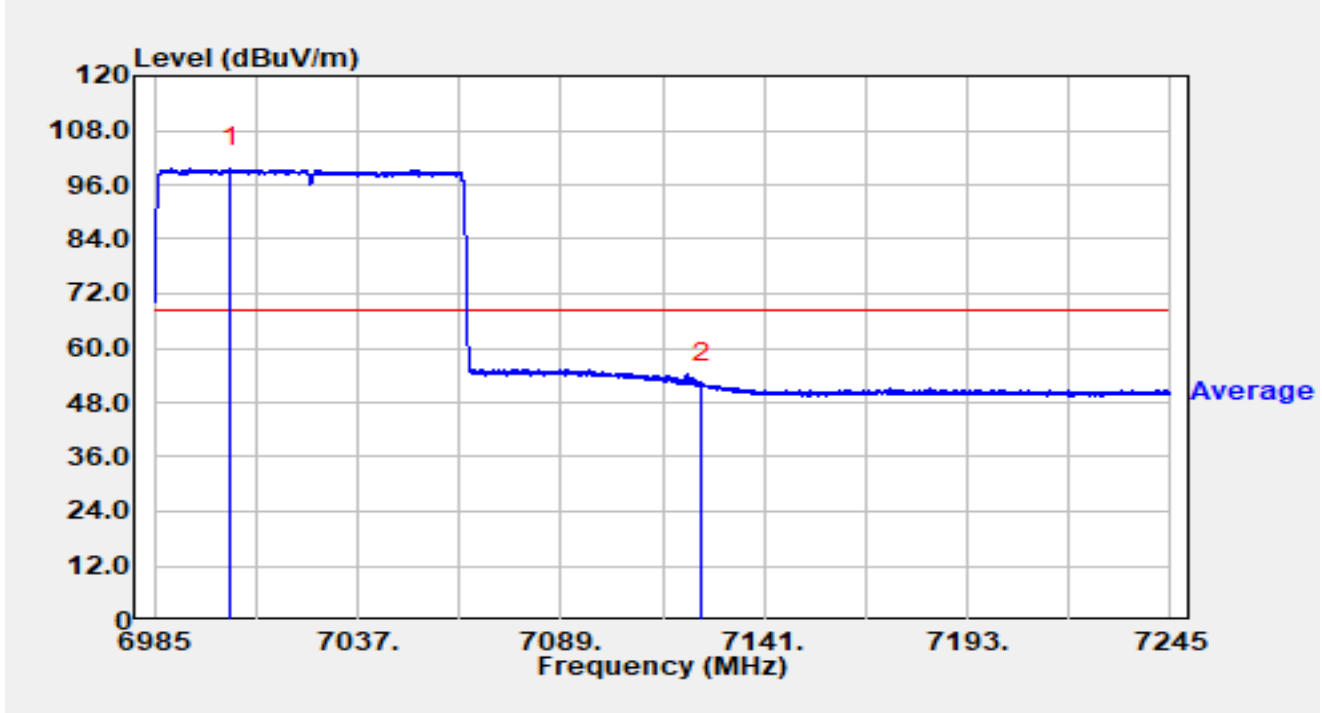


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7004.396	79.55	20.29	99.84	N/A	N/A	Average
2	*	7125.000	31.80	20.42	52.22	-15.98	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz (Nss=3)		

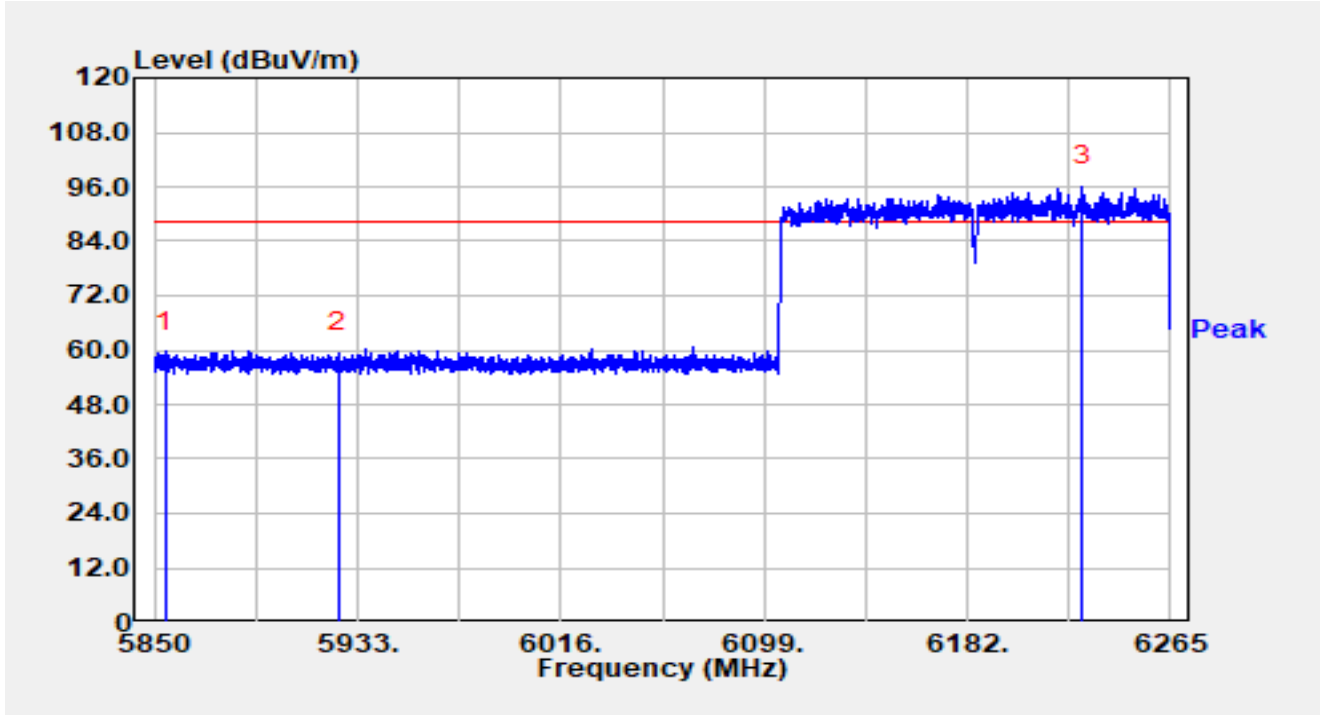


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5854.399	42.31	17.32	59.63	-28.57	88.20	Peak
2		5925.000	41.98	17.36	59.35	-28.85	88.20	Peak
3		6228.771	77.27	18.74	96.01	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz (Nss=3)		

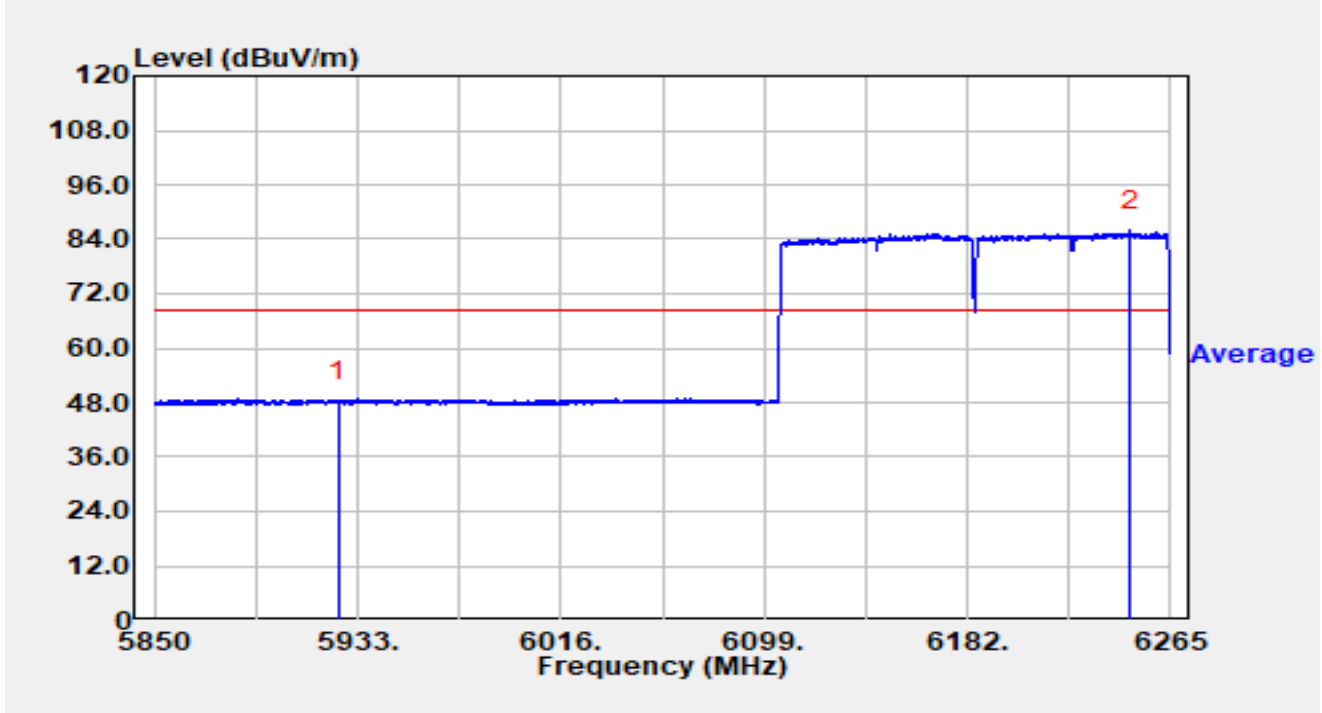


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	30.80	17.36	48.16	-20.04	68.20	Average
2		6248.732	67.12	18.81	85.92	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz (Nss=3)		

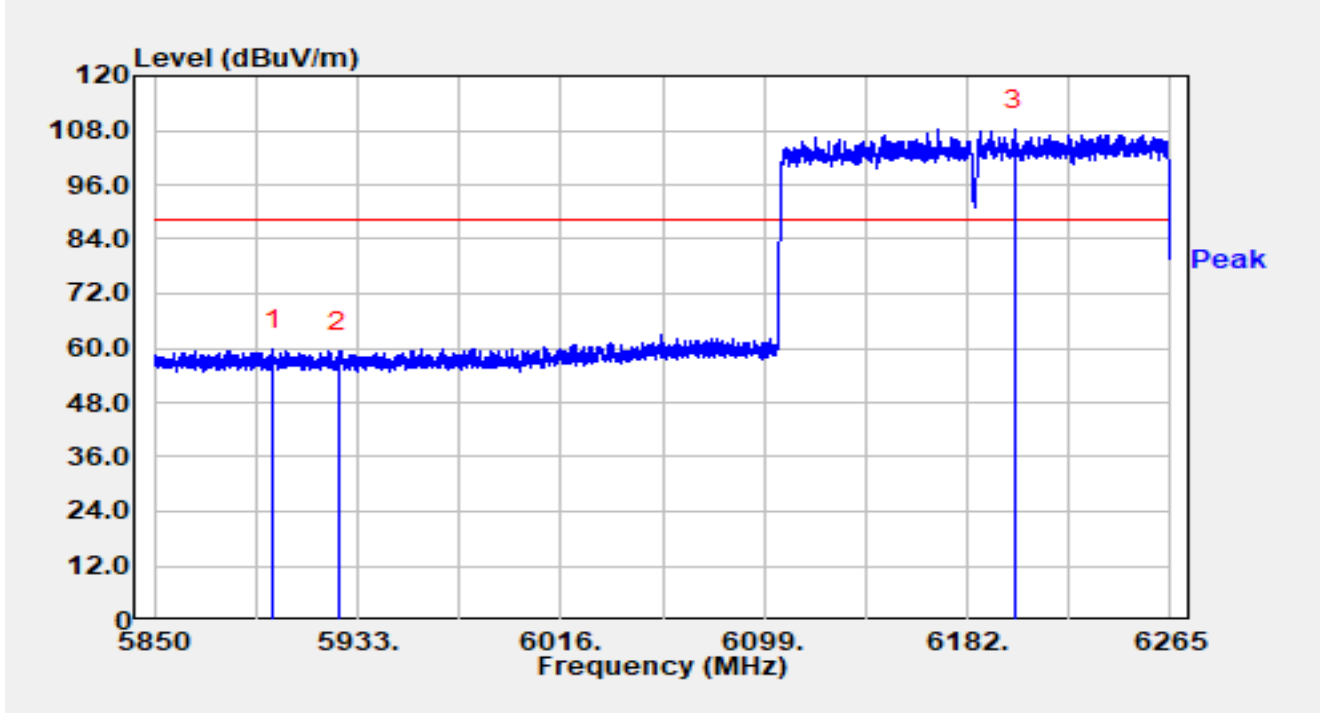


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5898.265	42.40	17.37	59.77	-28.43	88.20	Peak
2		5925.000	41.55	17.36	58.91	-29.29	88.20	Peak
3		6201.297	89.67	18.55	108.22	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6185MHz (Nss=3)		

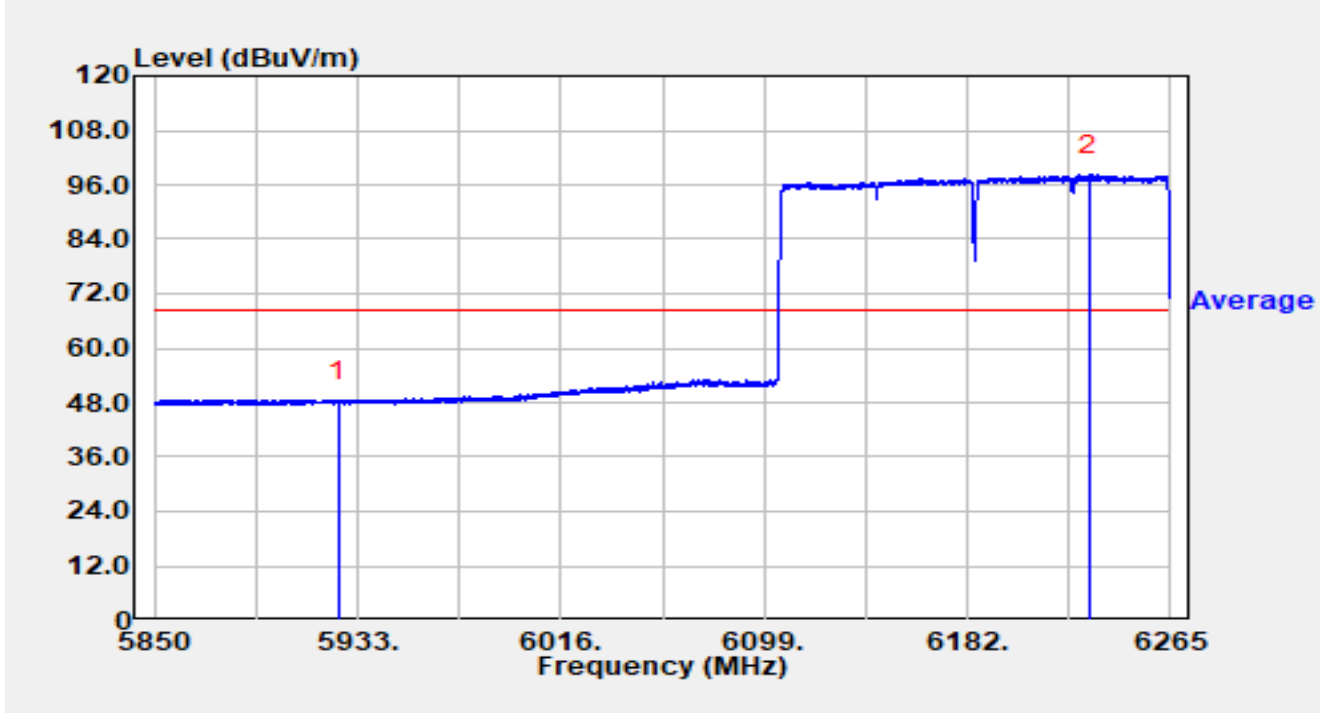


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	30.72	17.36	48.08	-20.12	68.20	Average
2		6231.675	79.40	18.75	98.16	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz (Nss=3)		

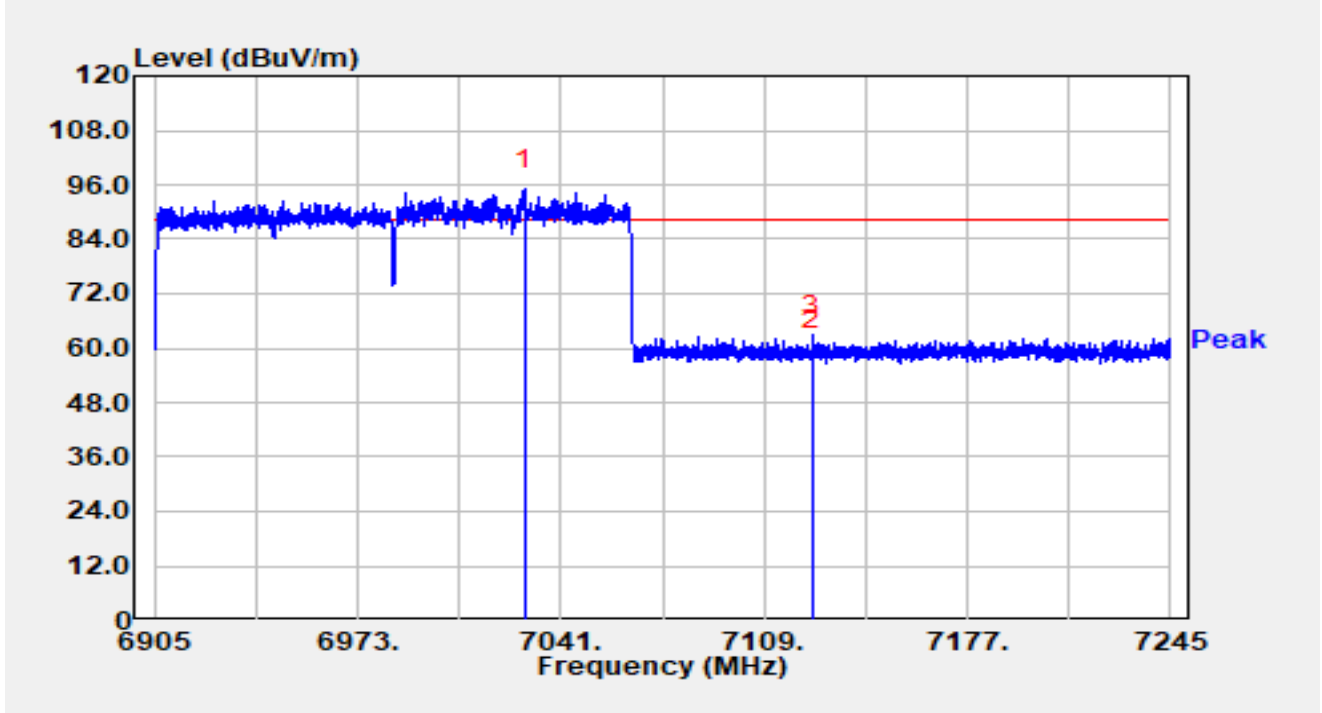


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7028.828	74.73	20.27	95.00	N/A	N/A	Peak
2		7125.000	38.95	20.42	59.37	-28.83	88.20	Peak
3	*	7125.218	42.49	20.43	62.91	-25.29	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz (Nss=3)		

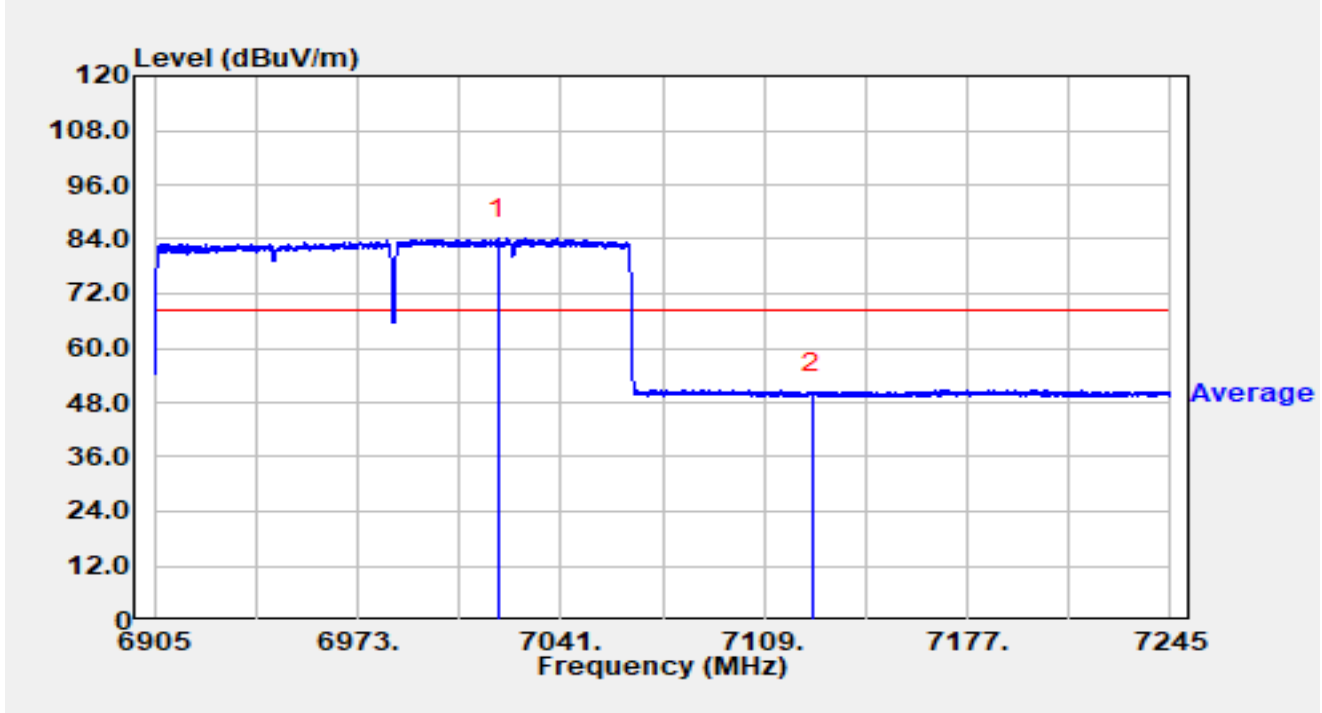


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7019.920	63.77	20.37	84.14	N/A	N/A	Average
2	*	7125.000	29.80	20.42	50.22	-17.98	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz (Nss=3)		

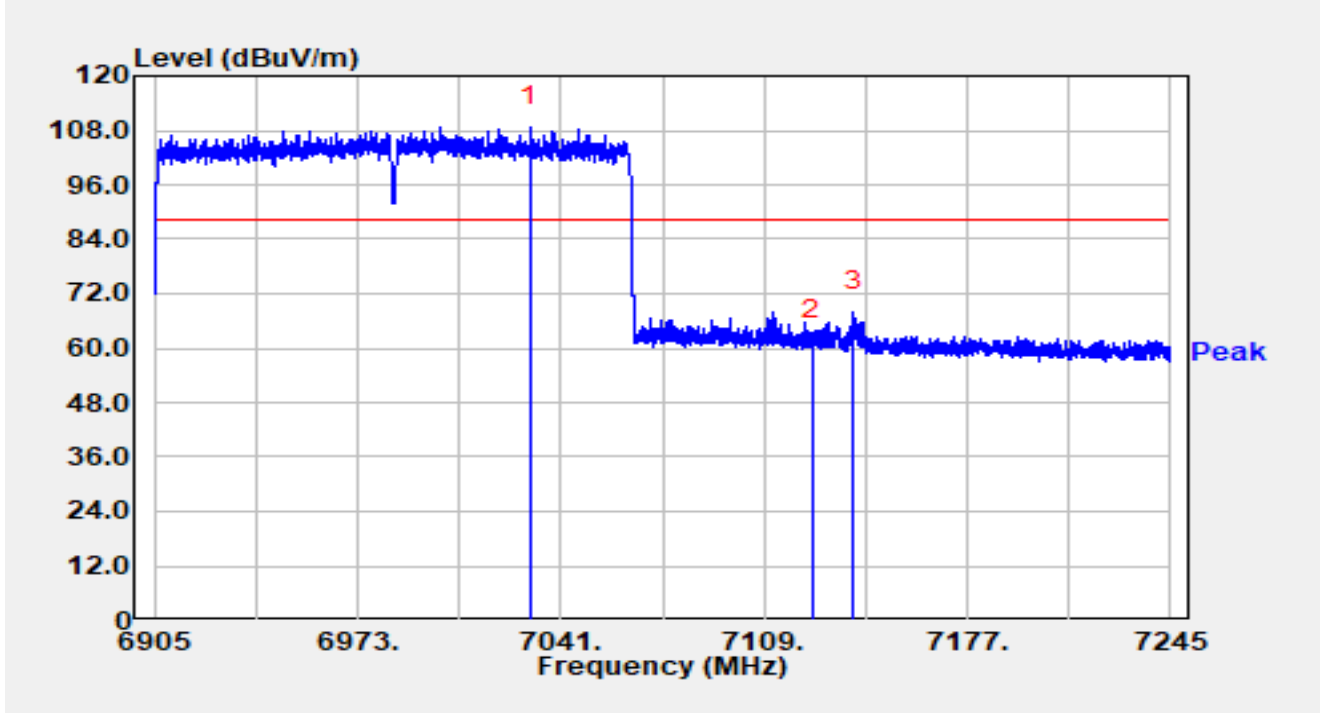


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7030.630	88.65	20.26	108.90	N/A	N/A	Peak
2		7125.000	41.42	20.42	61.85	-26.35	88.20	Peak
3	*	7138.750	47.69	20.42	68.11	-20.09	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 6985MHz (Nss=3)		

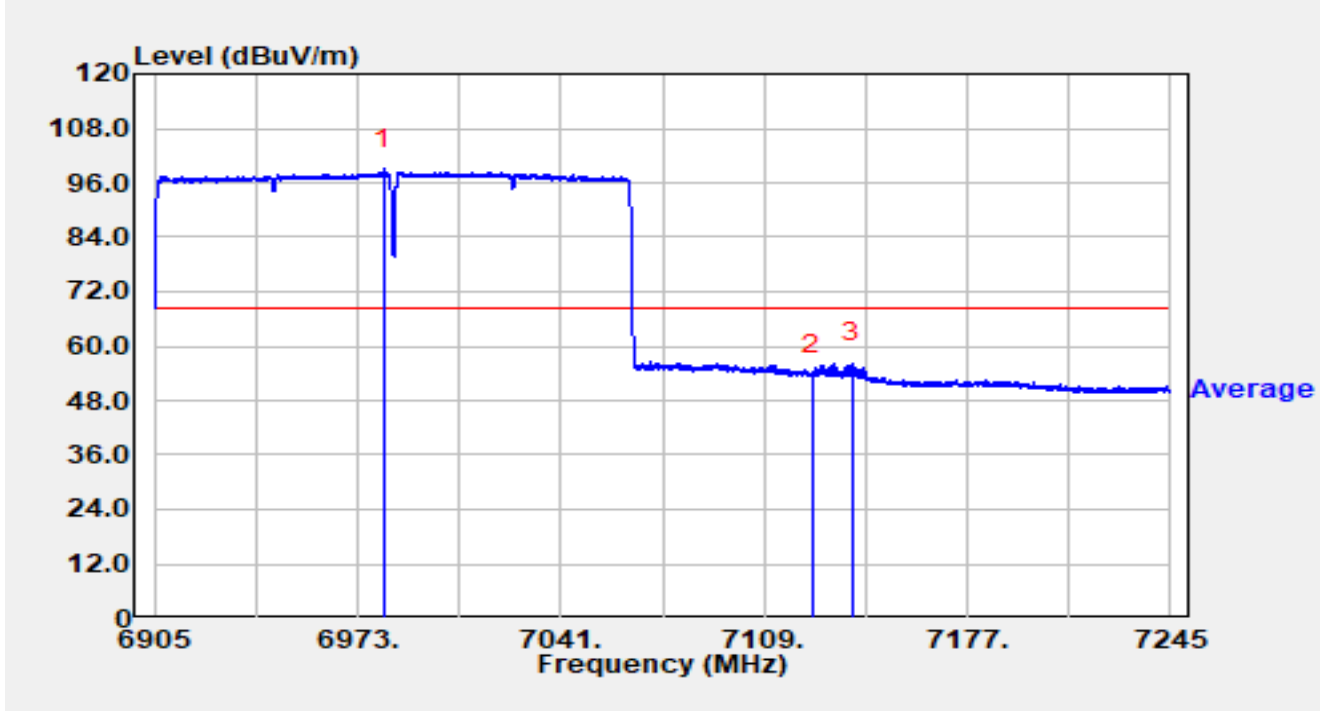


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6981.602	78.74	20.29	99.02	N/A	N/A	Average
2		7125.000	33.17	20.42	53.60	-14.60	68.20	Average
3	*	7138.682	35.87	20.42	56.29	-11.91	68.20	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6425MHz (Nss=3)		

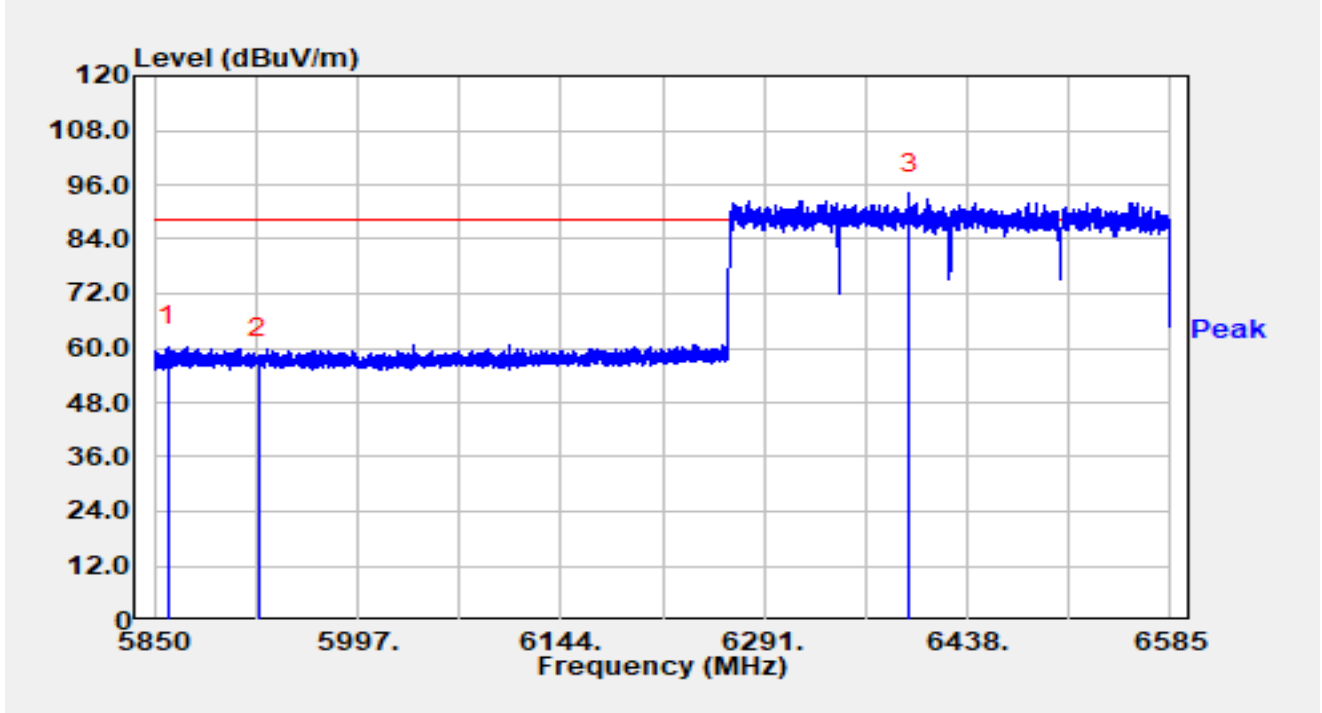


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5859.408	42.92	17.33	60.25	-27.95	88.20	Peak
2		5925.000	40.51	17.36	57.88	-30.32	88.20	Peak
3		6396.399	74.55	19.45	94.00	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6425MHz (Nss=3)		

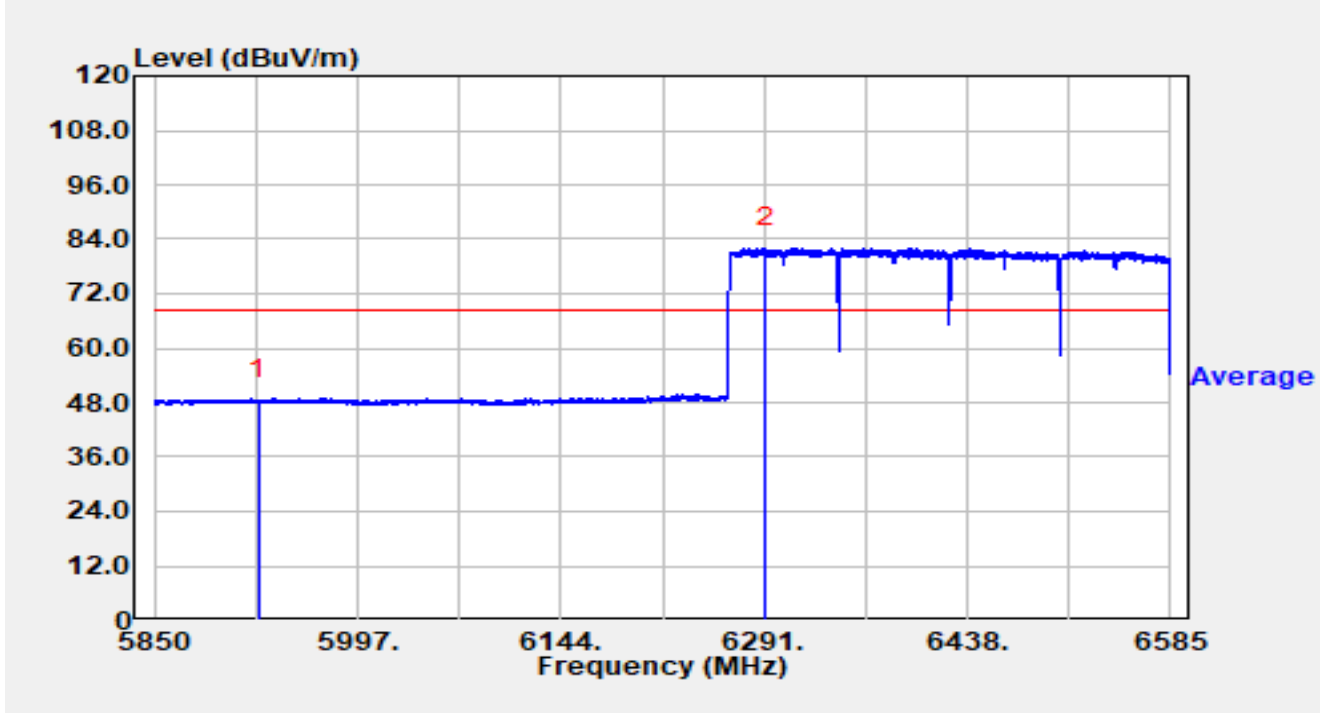


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	31.15	17.36	48.52	-19.68	68.20	Average
2		6292.029	63.06	19.04	82.10	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6425MHz (Nss=3)		

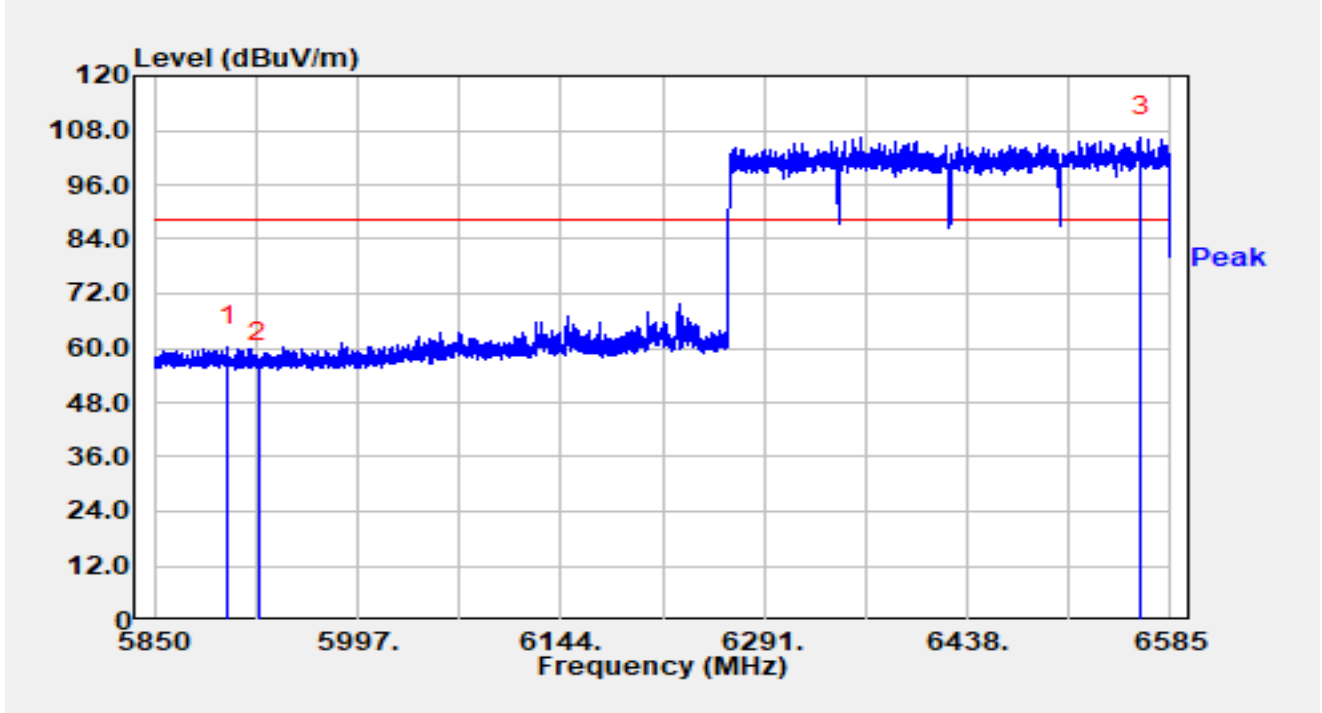


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5902.994	42.99	17.36	60.36	-27.84	88.20	Peak
2		5925.000	39.38	17.36	56.74	-31.46	88.20	Peak
3		6563.905	86.37	20.08	106.45	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6425MHz (Nss=3)		

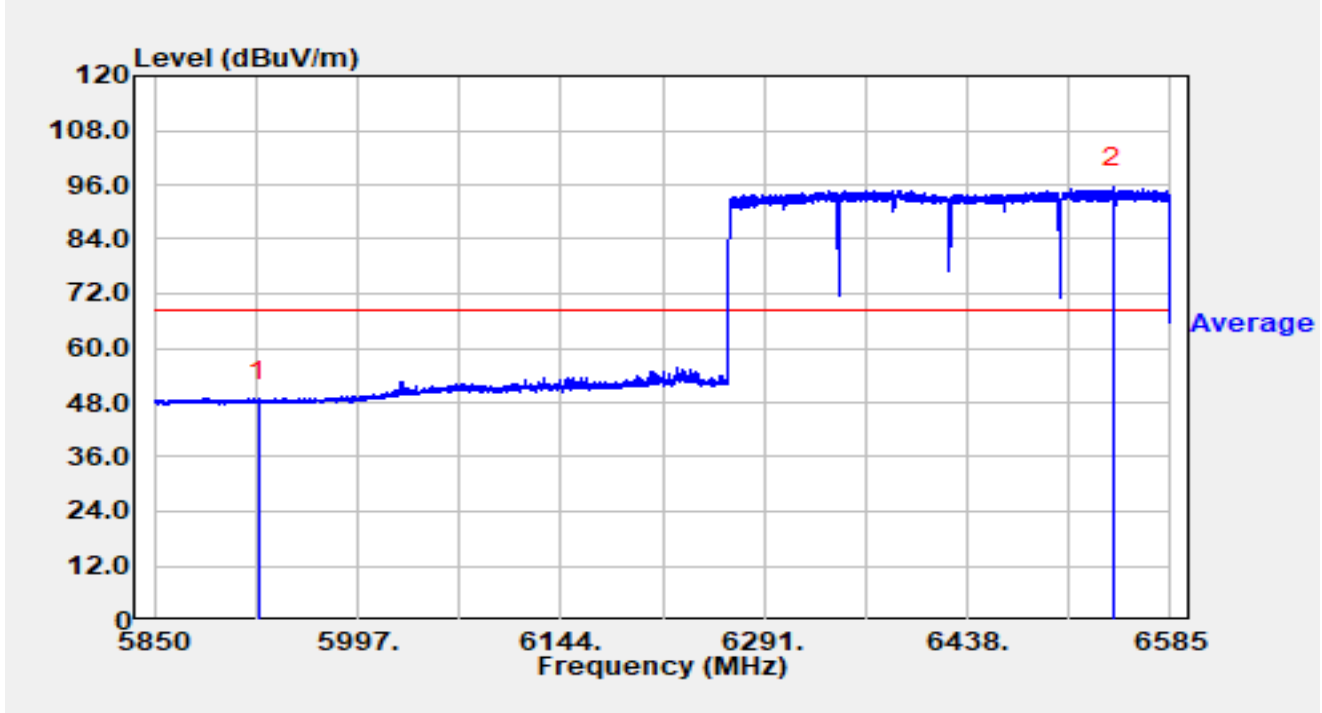


No	Mark	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector
1	*	5925.000	30.67	17.36	48.03	-20.17	68.20	Average
2		6543.767	75.43	20.09	95.52	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBuV/m) = Reading (dBuV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz (Nss=3)		

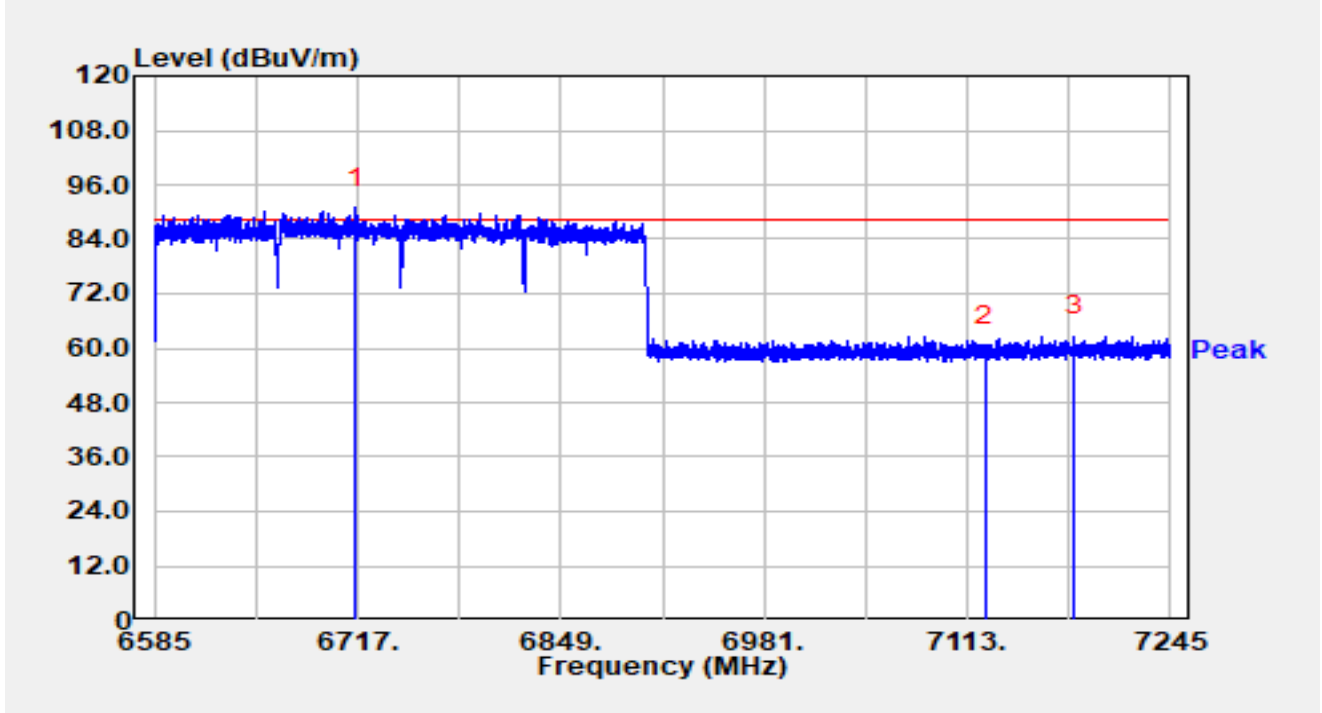


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6715.944	70.41	20.39	90.80	N/A	N/A	Peak
2		7125.000	39.93	20.42	60.36	-27.84	88.20	Peak
3	*	7182.498	41.81	20.70	62.51	-25.69	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz (Nss=3)		

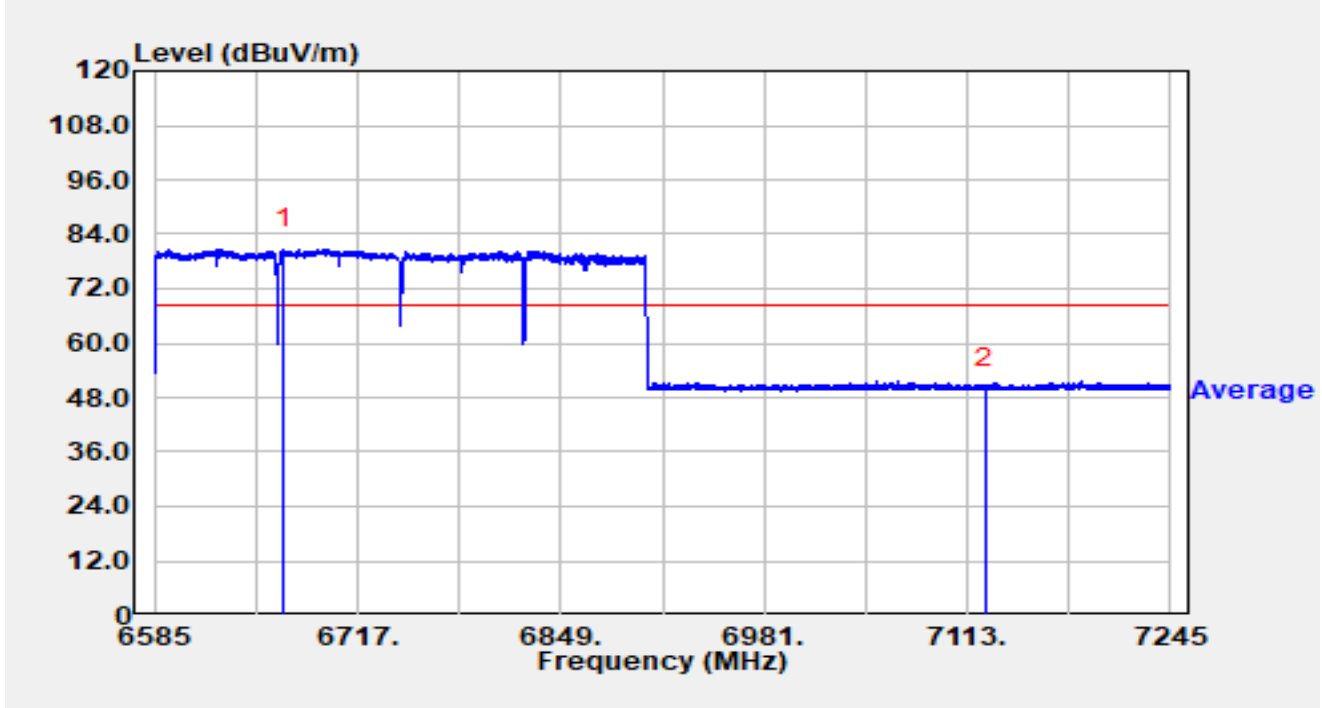


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6668.688	60.47	20.26	80.73	N/A	N/A	Average
2	*	7125.000	29.61	20.42	50.04	-18.16	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz (Nss=3)		

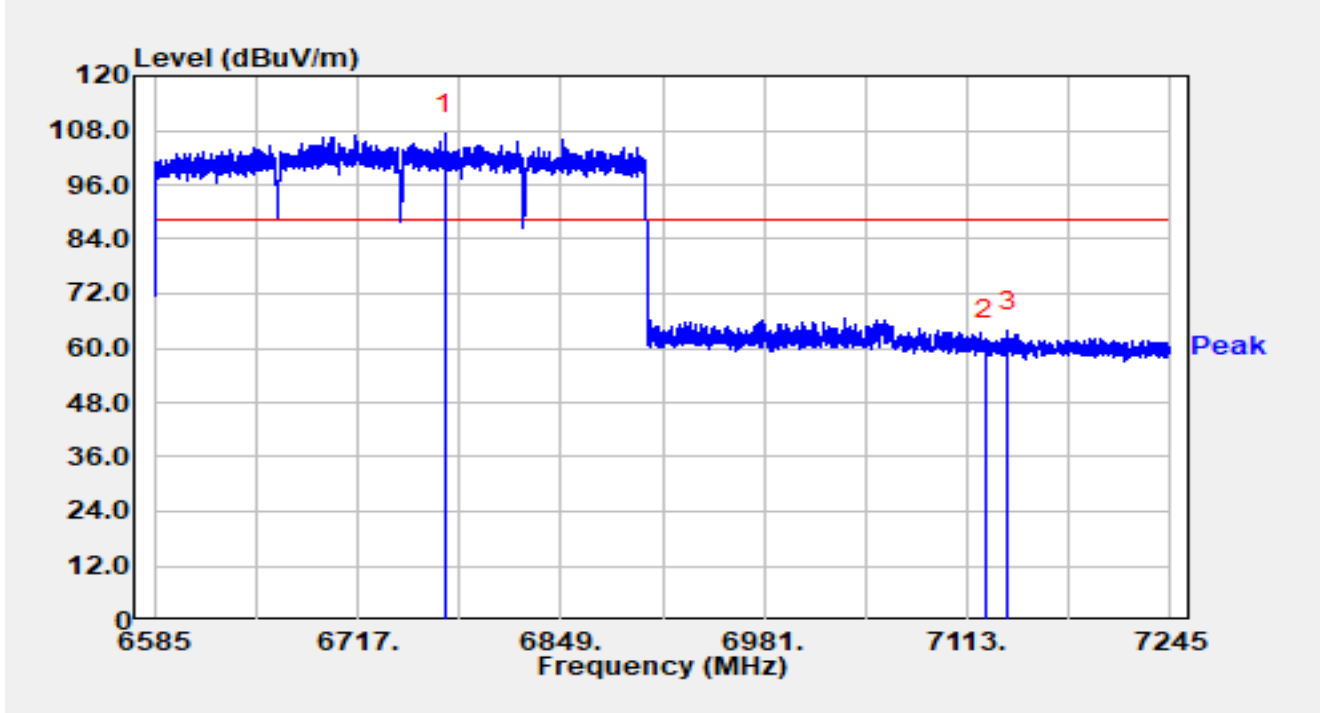


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6773.562	86.84	20.41	107.25	N/A	N/A	Peak
2		7125.000	41.25	20.42	61.67	-26.53	88.20	Peak
3	*	7139.466	43.31	20.41	63.72	-24.48	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-1 at 6745MHz (Nss=3)		

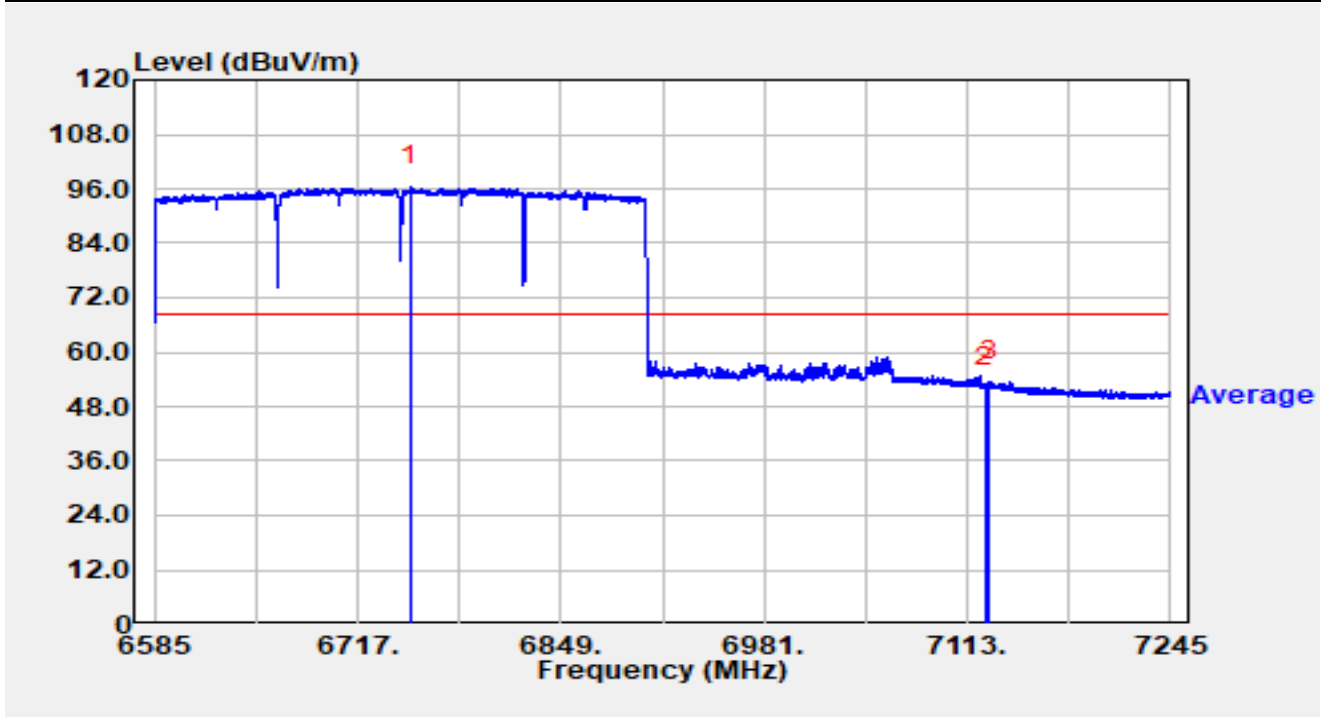


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6751.122	76.17	20.37	96.54	N/A	N/A	Average
2		7125.000	32.03	20.42	52.45	-15.75	68.20	Average
3	*	7127.388	33.00	20.44	53.44	-14.76	68.20	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz (Nss=3)		

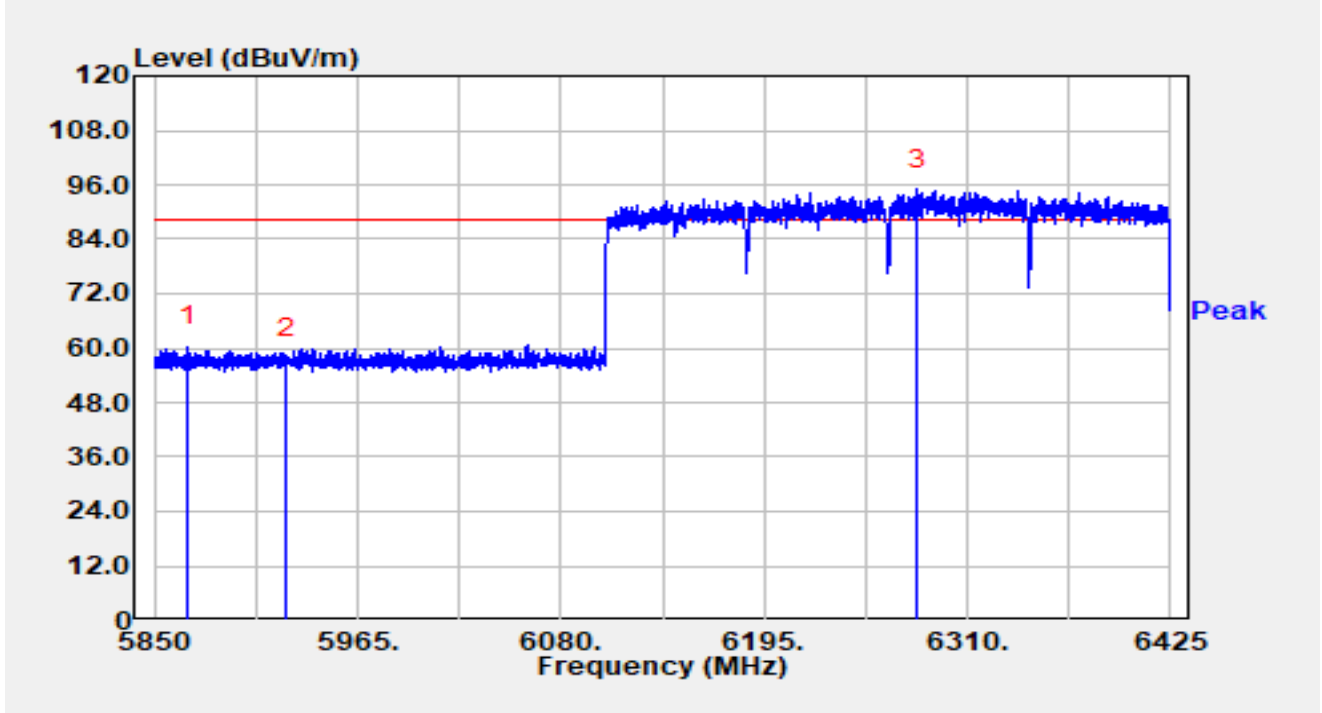


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5869.263	42.90	17.34	60.25	-27.95	88.20	Peak
2		5925.000	40.16	17.36	57.52	-30.68	88.20	Peak
3		6281.710	76.10	18.97	95.07	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz (Nss=3)		

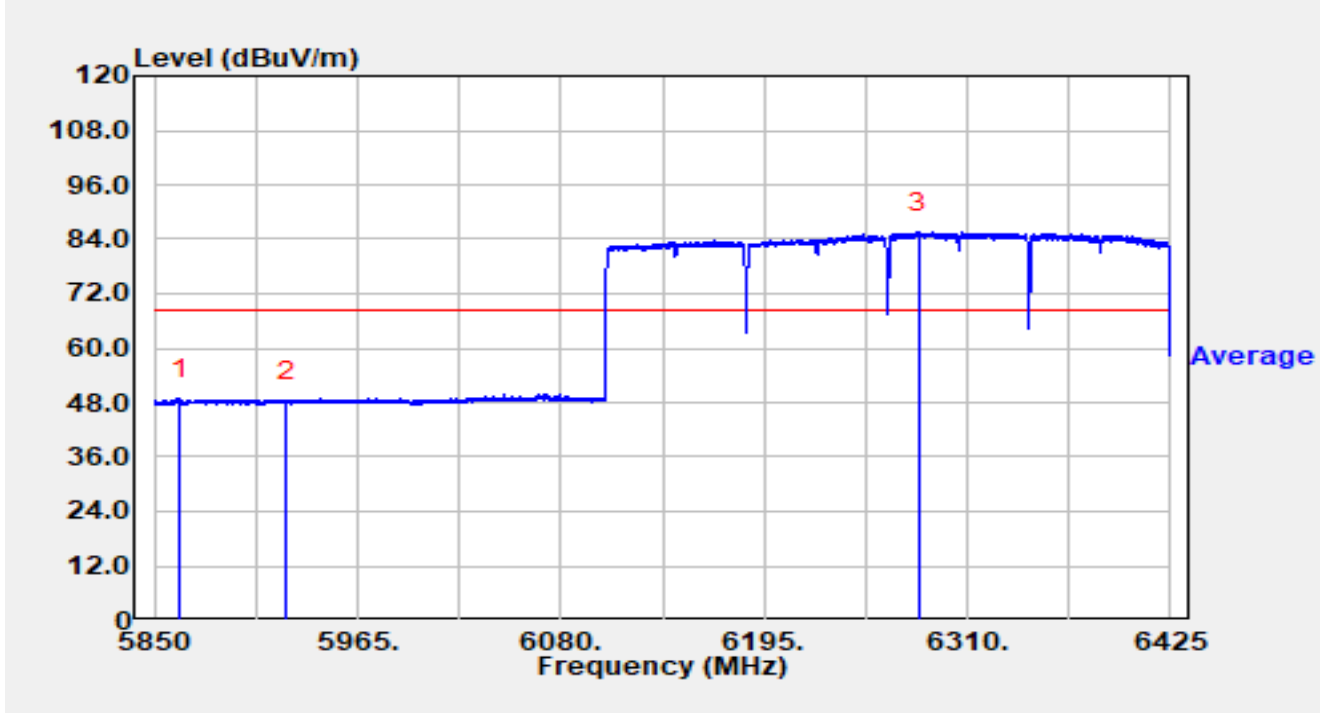


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5864.720	31.38	17.34	48.71	-19.49	68.20	Average
2		5925.000	30.68	17.36	48.05	-20.15	68.20	Average
3		6282.112	66.48	18.98	85.45	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz (Nss=3)		

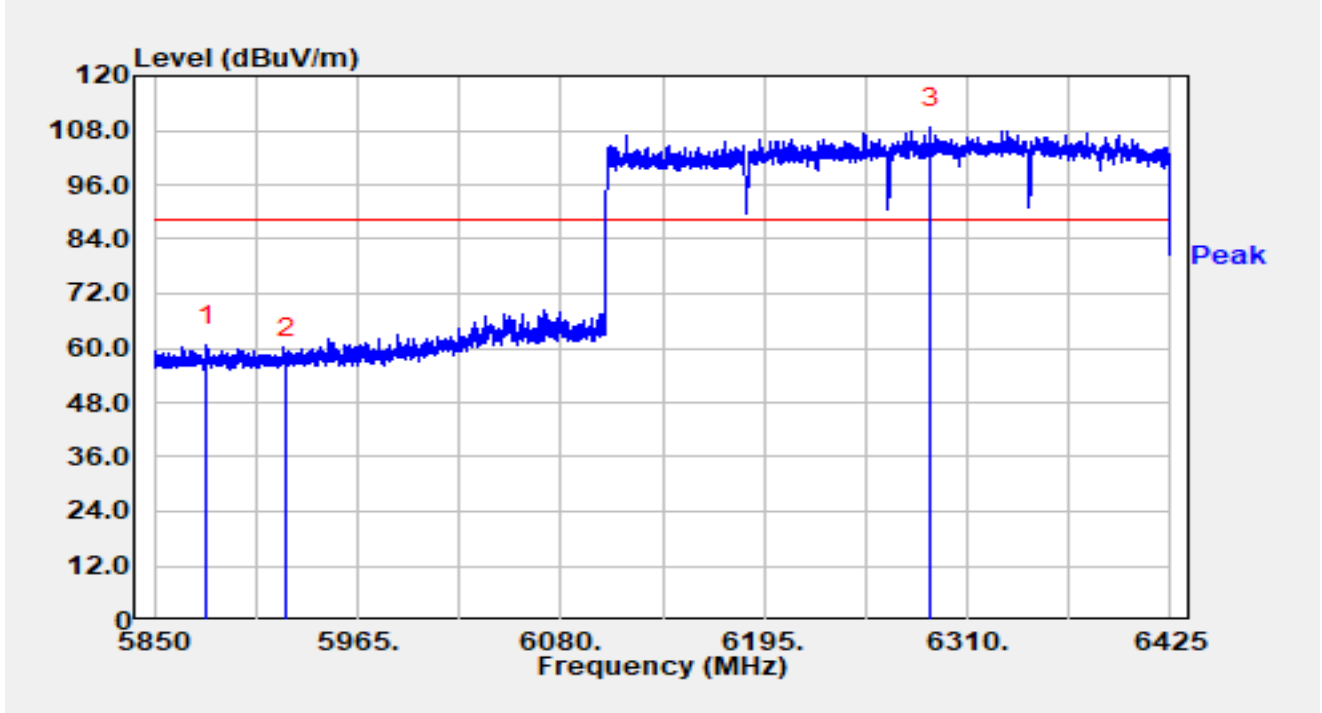


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5879.842	43.17	17.40	60.57	-27.63	88.20	Peak
2		5925.000	40.23	17.36	57.60	-30.60	88.20	Peak
3		6289.300	89.55	19.02	108.57	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6265MHz (Nss=3)		

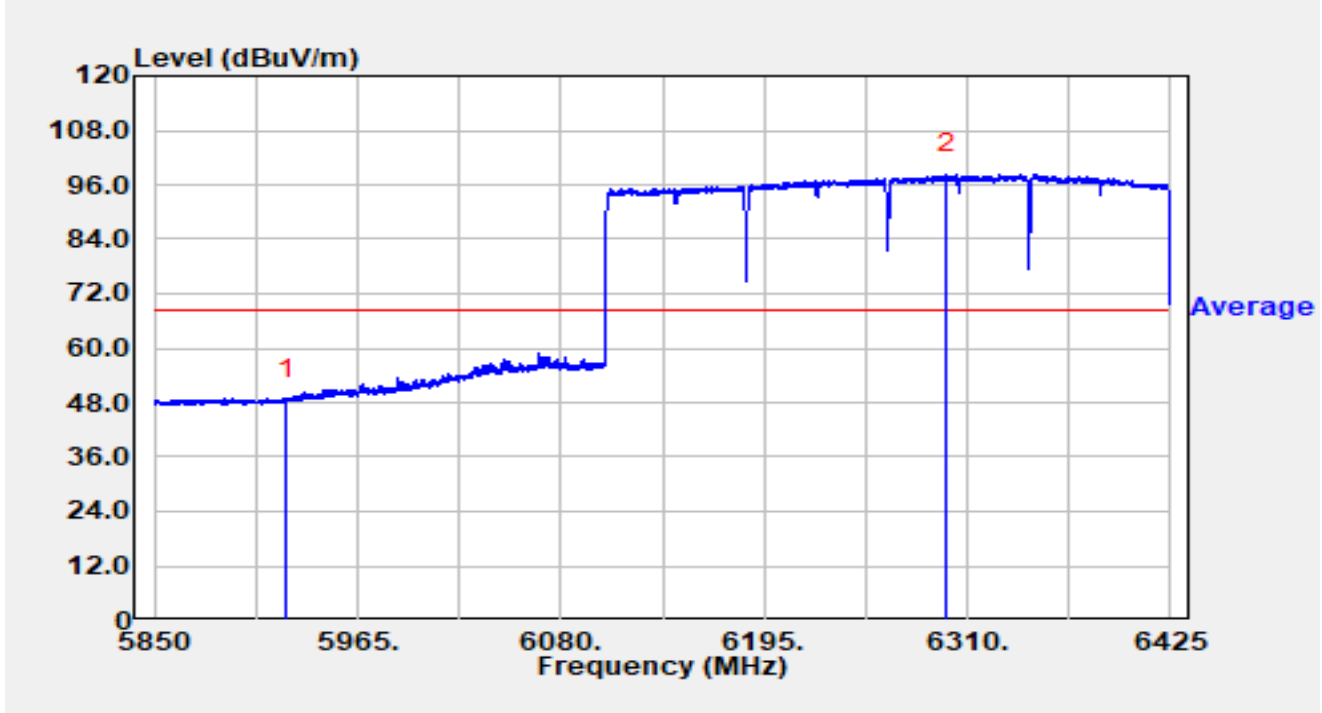


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.000	31.16	17.36	48.52	-19.68	68.20	Average
2		6298.328	79.24	19.07	98.32	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz (Nss=3)		

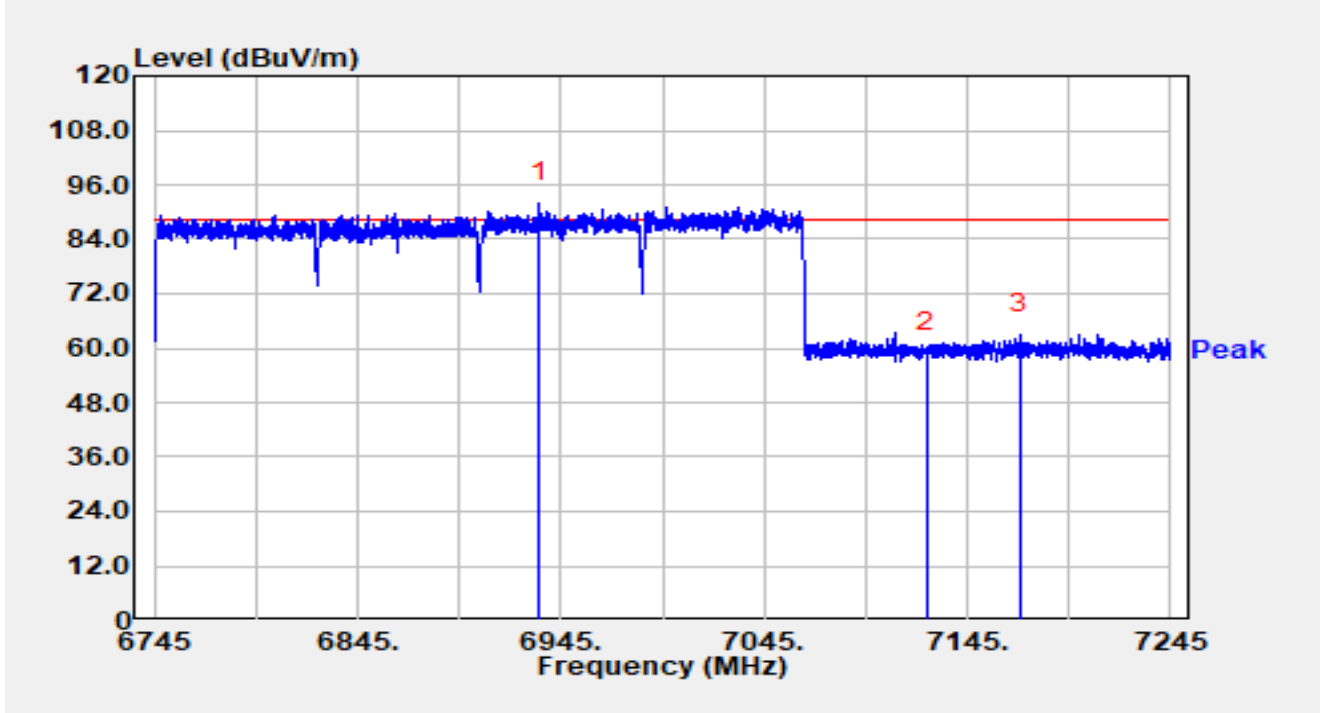


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6934.100	71.56	20.42	91.99	N/A	N/A	Peak
2		7125.000	38.65	20.42	59.08	-29.12	88.20	Peak
3	*	7170.800	42.22	20.75	62.97	-25.23	88.20	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Horizontal
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz (Nss=3)		

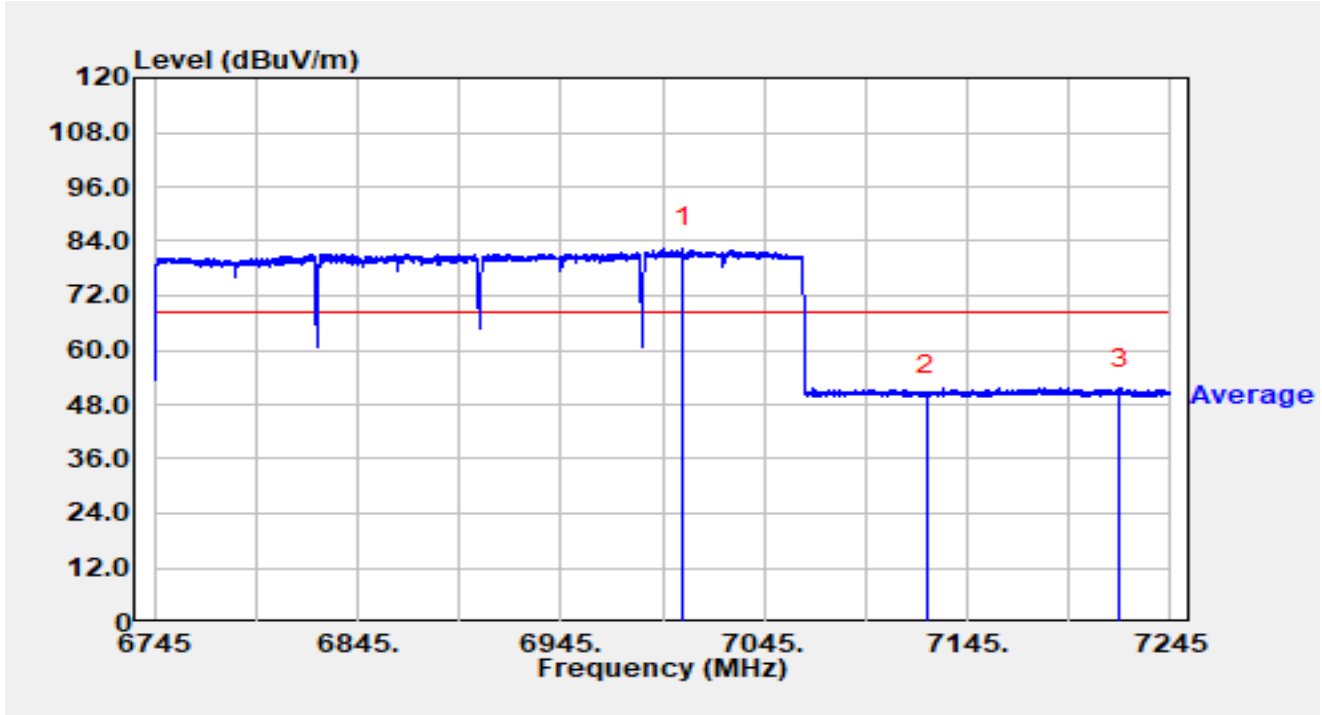


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7005.150	62.22	20.30	82.52	N/A	N/A	Average
2		7125.000	29.74	20.42	50.17	-18.03	68.20	Average
3	*	7219.900	31.04	20.56	51.60	-16.60	68.20	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz (Nss=3)		

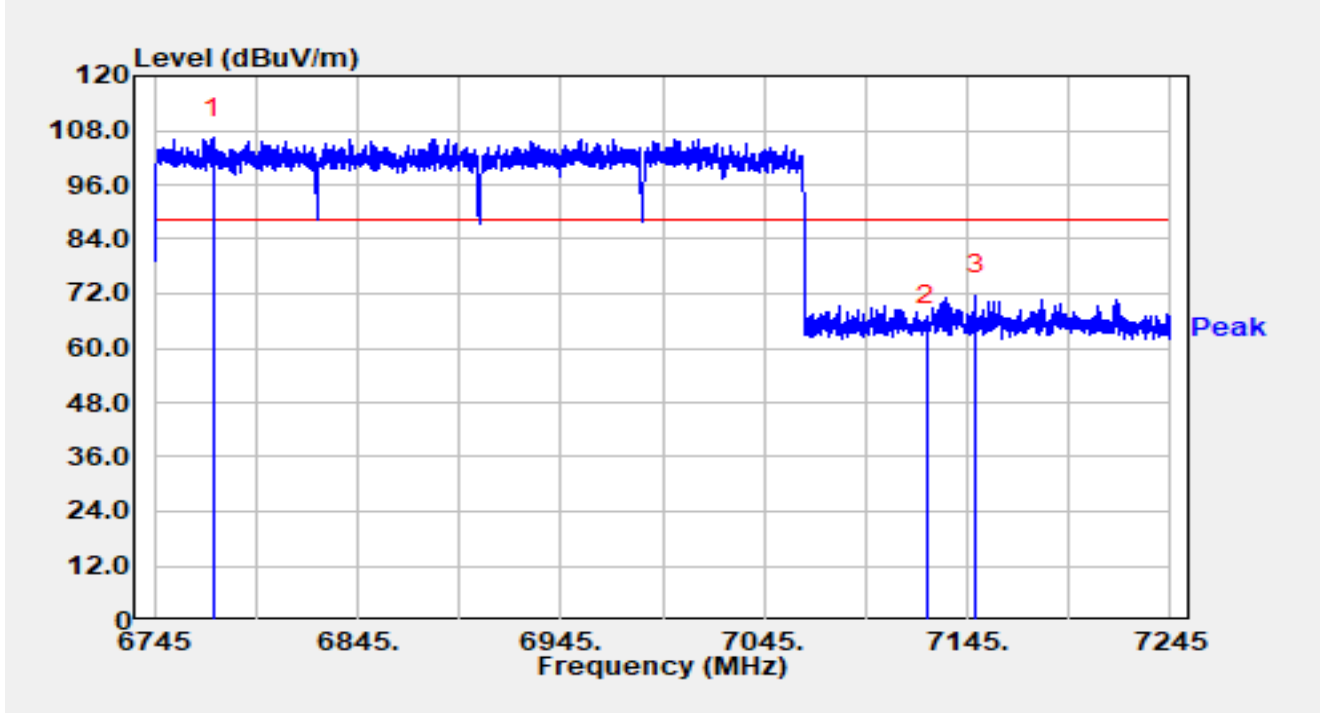


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6773.700	85.97	20.41	106.38	N/A	N/A	Peak
2		7125.000	44.51	20.42	64.93	-23.27	88.20	Peak
3	*	7149.250	51.21	20.37	71.58	-16.62	88.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-08
Temperature	18.4 °C	Humidity	23.5 %
Limit	FCC_6G RE(3m)	Test Engineer	Bob Zhang
Factor	DRH18-E_07105	Polarity	Vertical
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320-2 at 6905MHz (Nss=3)		

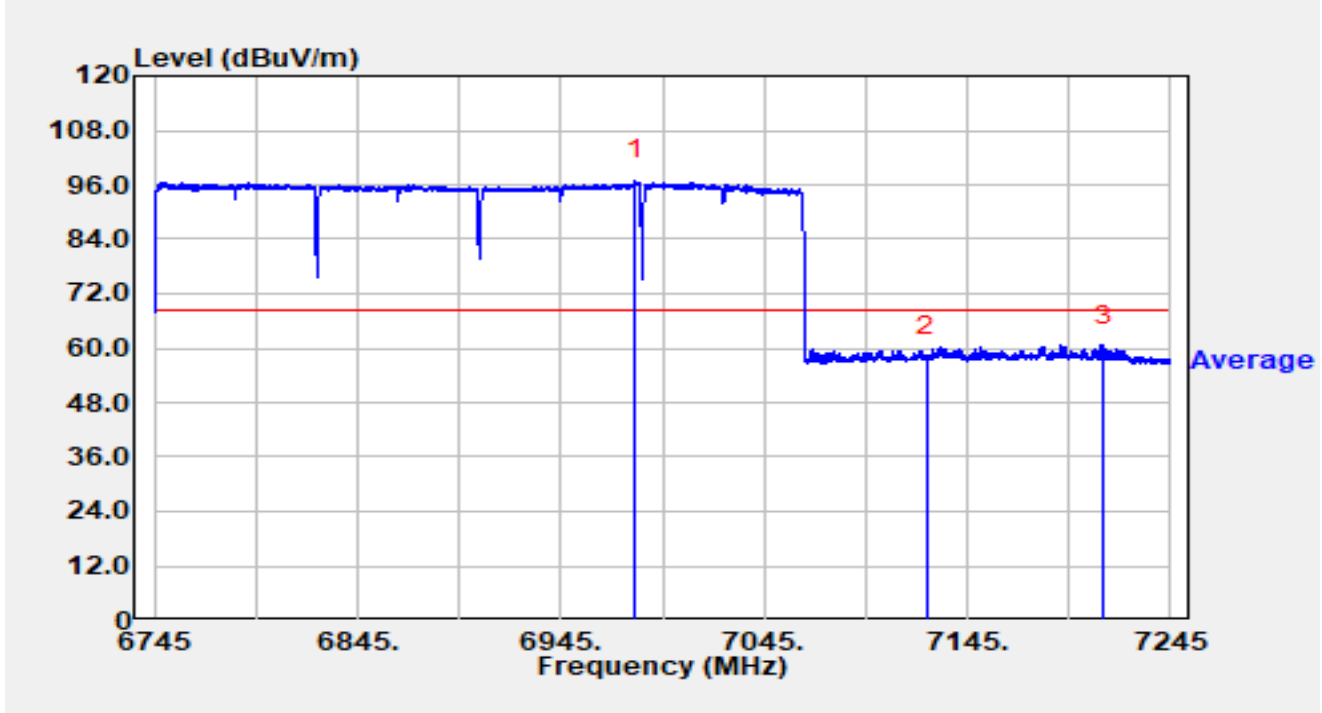


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6981.700	76.65	20.29	96.94	N/A	N/A	Average
2		7125.000	37.57	20.42	57.99	-10.21	68.20	Average
3	*	7211.950	39.99	20.60	60.59	-7.61	68.20	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Site	WJ-SR5	Test Date	2025-02-11
Temperature	18.1 °C	Humidity	40.5 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_L1_Filter Off_E	Polarity	Line
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

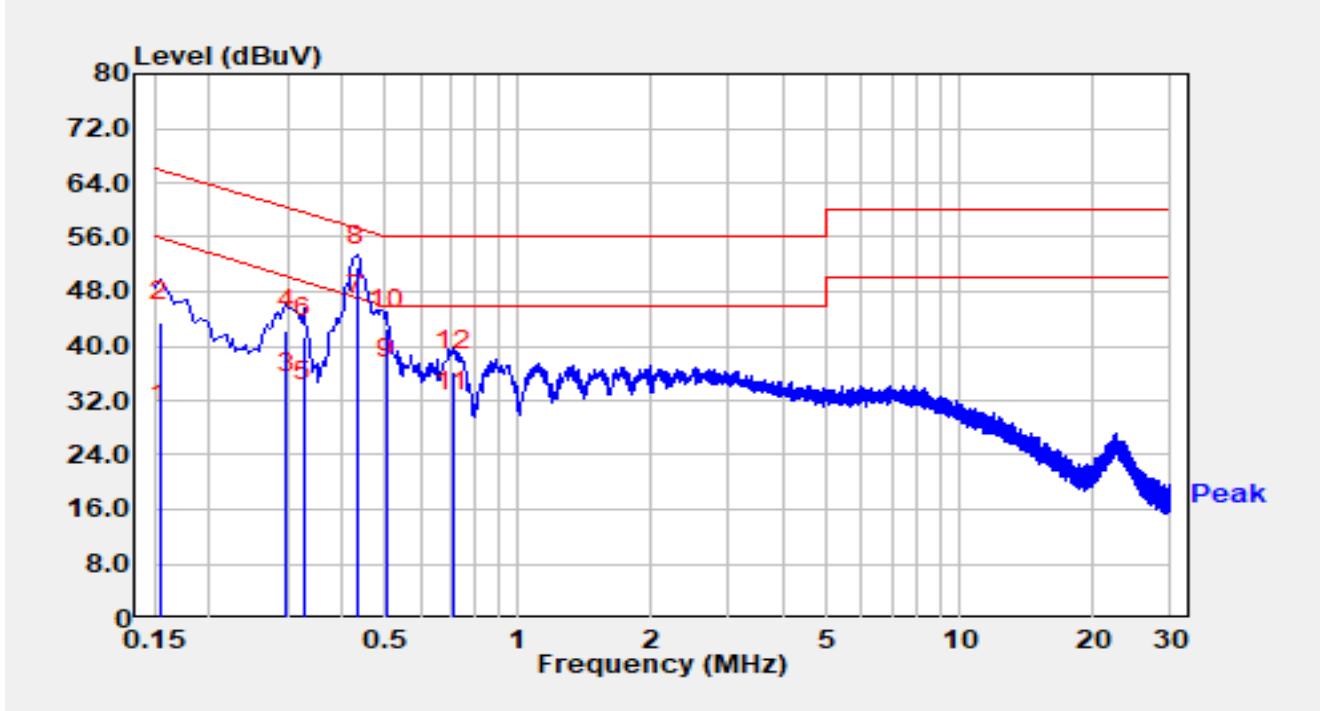


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	18.70	9.89	28.59	-27.19	55.78	Average
2		0.154	33.60	9.89	43.49	-22.29	65.78	QP
3		0.298	23.20	9.90	33.10	-17.20	50.30	Average
4		0.298	32.40	9.90	42.30	-18.00	60.30	QP
5		0.326	21.80	9.90	31.70	-17.85	49.55	Average
6		0.326	31.40	9.90	41.30	-18.25	59.55	QP
7	*	0.430	34.60	9.94	44.54	-2.72	47.25	Average
8		0.430	41.70	9.94	51.64	-5.62	57.25	QP
9		0.502	25.20	9.96	35.16	-10.84	46.00	Average
10		0.502	32.50	9.96	42.46	-13.54	56.00	QP
11		0.710	20.40	10.05	30.45	-15.55	46.00	Average

12		0.710	26.30	10.05	36.35	-19.65	56.00	QP
----	--	-------	-------	-------	-------	--------	-------	----

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WJ-SR5	Test Date	2025-02-11
Temperature	18.1 °C	Humidity	40.5 %
Limit	FCC Part 15.207_CE	Test Engineer	Carl Jiang
Factor	ENV216-07202_N_Filter Off_E	Polarity	Neutral
EUT	BE14000 Whole Home Mesh Wi-Fi 7 System	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT320 at 6265MHz		

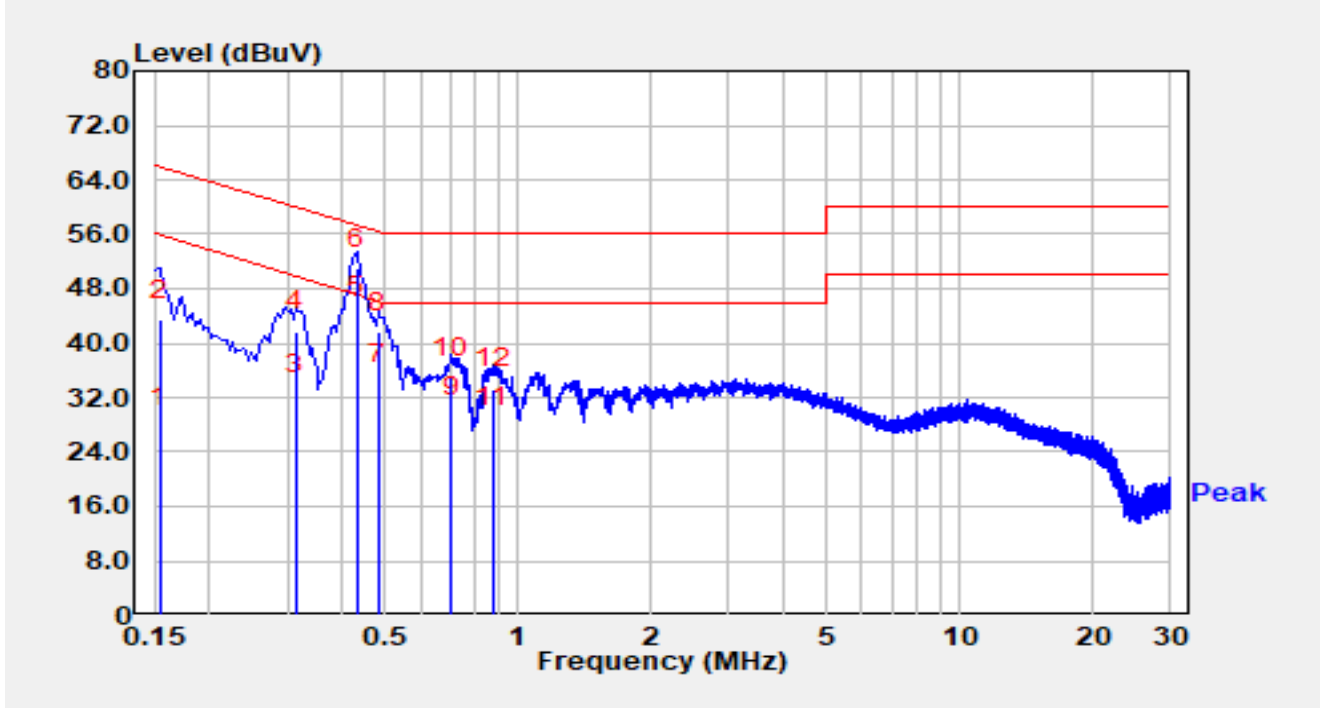

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	17.80	9.90	27.70	-28.08	55.78	Average
2		0.154	33.50	9.90	43.40	-22.38	65.78	QP
3		0.314	22.40	9.91	32.31	-17.55	49.86	Average
4		0.314	31.80	9.91	41.71	-18.15	59.86	QP
5	*	0.430	34.00	9.95	43.95	-3.30	47.25	Average
6		0.430	41.00	9.95	50.95	-6.30	57.25	QP
7		0.482	24.10	9.97	34.07	-12.23	46.30	Average
8		0.482	31.60	9.97	41.57	-14.73	56.30	QP
9		0.706	19.00	10.08	29.08	-16.92	46.00	Average
10		0.706	24.90	10.08	34.98	-21.02	56.00	QP
11		0.874	17.60	10.15	27.75	-18.25	46.00	Average
12		0.874	23.20	10.15	33.35	-22.65	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2412RSU044-UT” file.

Appendix C – EUT Photograph

Refer to “2412RSU044-UE” file.

_____ The End _____