




802.11 g CH01 (2412MHz)

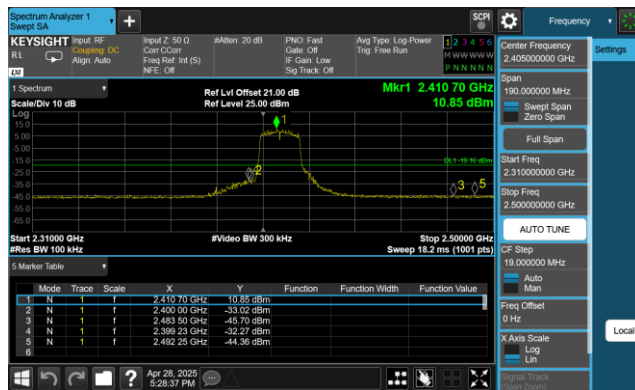


802.11 g CH01 (2412MHz)

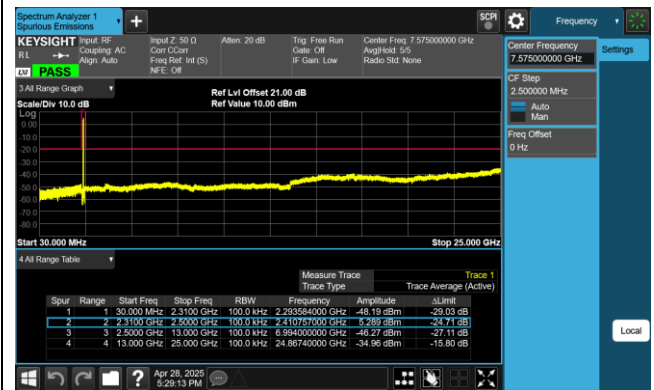


802.11 g CH06 (2437MHz)

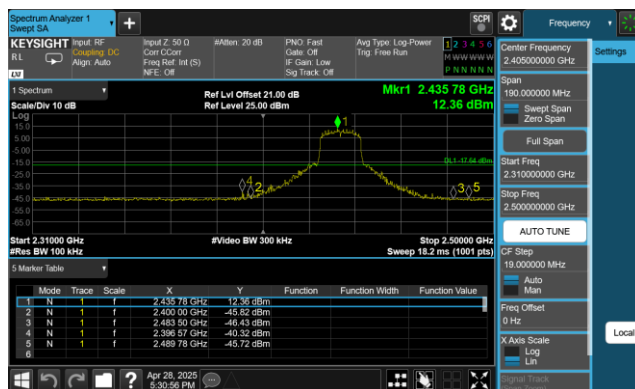


802.11 g CH06 (2437MHz)

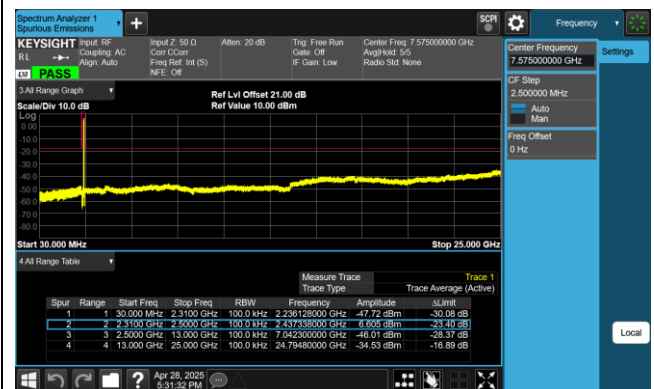


802.11 g CH11 (2462MHz)

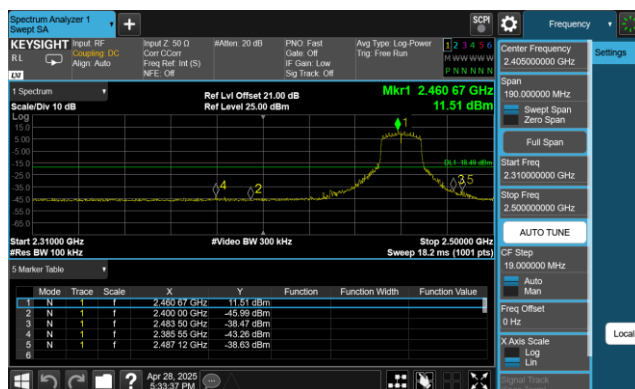


802.11 g CH11 (2462MHz)

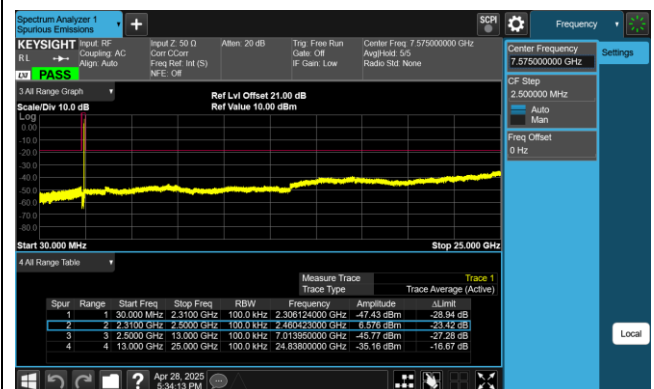


802.11 n20 CH01 (2412MHz)

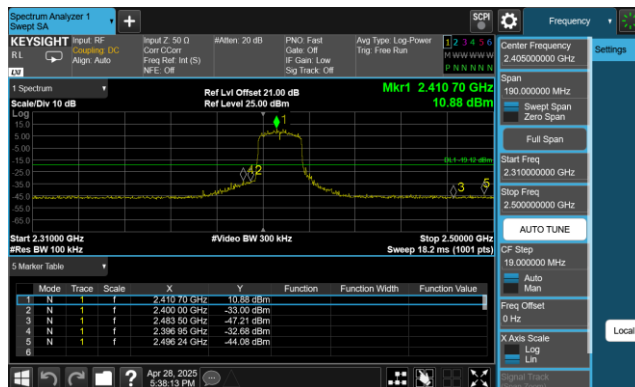


802.11 n20 CH01 (2412MHz)

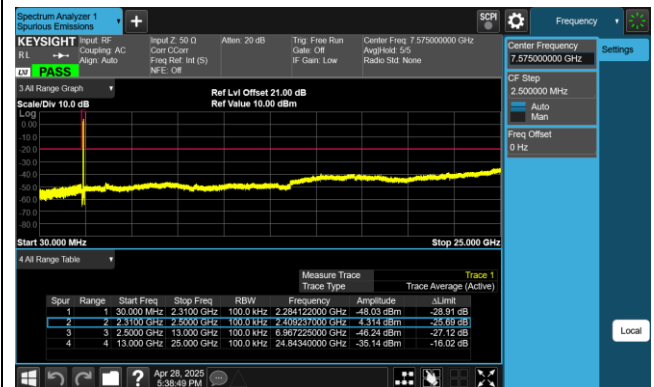


802.11 n20 CH06 (2437MHz)

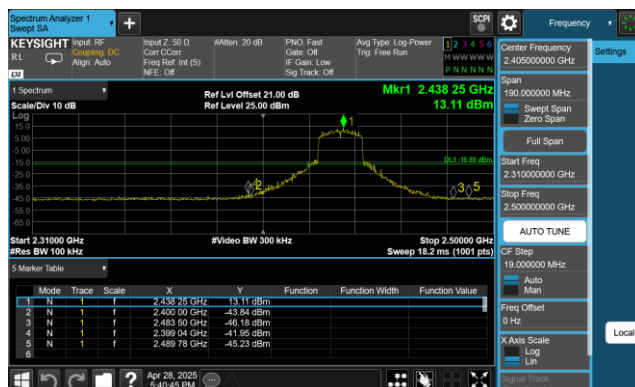


802.11 n20 CH06 (2437MHz)

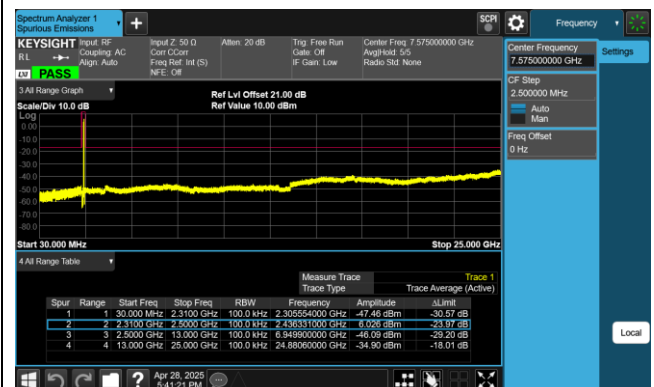


802.11 n20 CH11 (2462MHz)

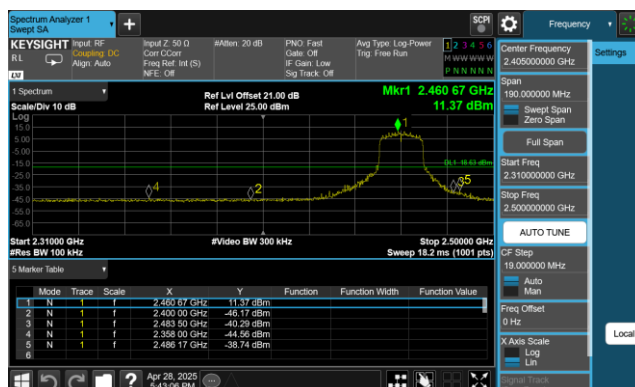


802.11 n20 CH11 (2462MHz)

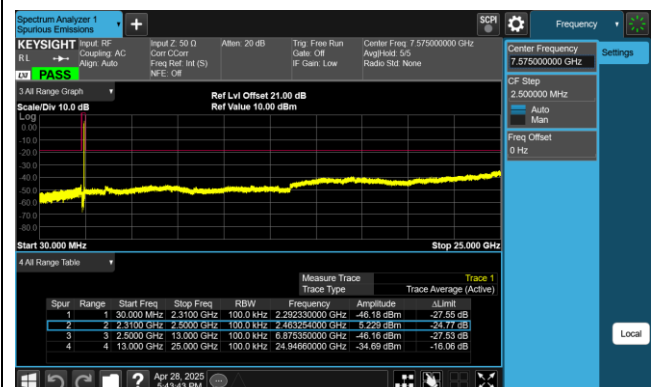


802.11 n40 CH03 (2422MHz)

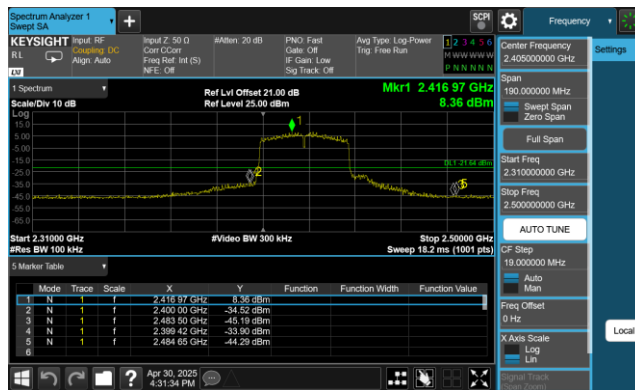


802.11 n40 CH03 (2422MHz)

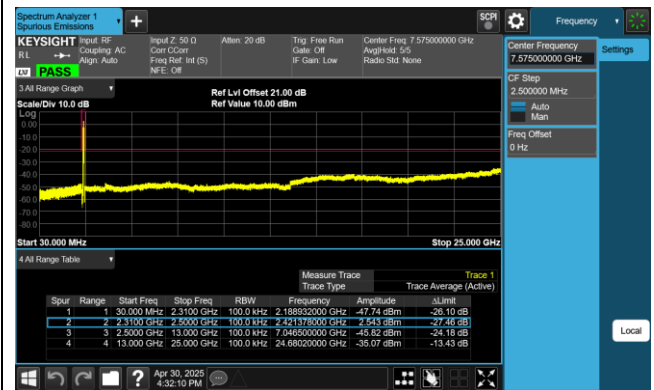


802.11 n40 CH06 (2437MHz)

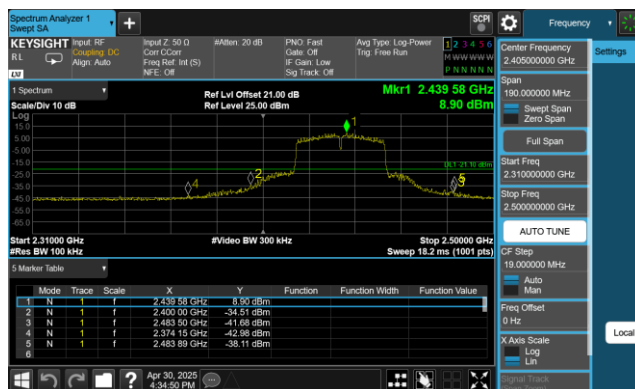


802.11 n40 CH06 (2437MHz)

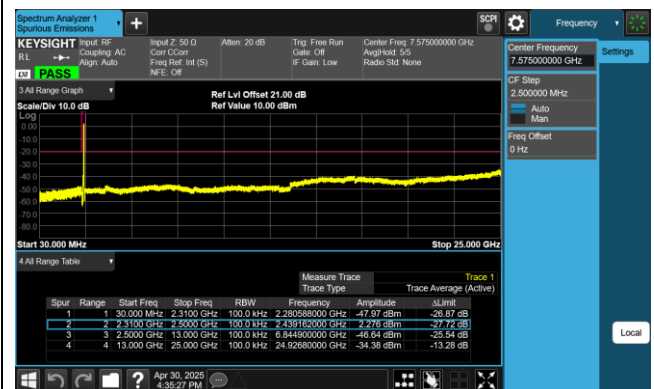


802.11 n40 CH09 (2452MHz)

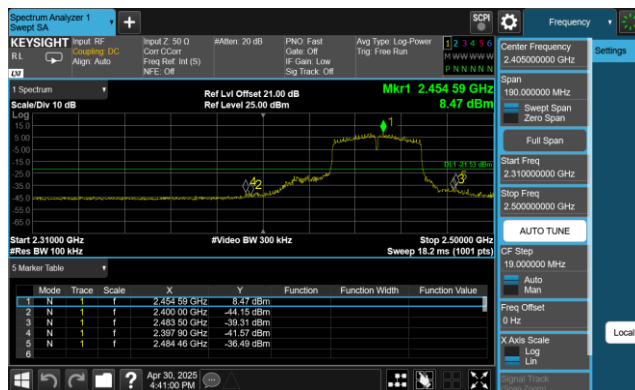


802.11 n40 CH09 (2452MHz)

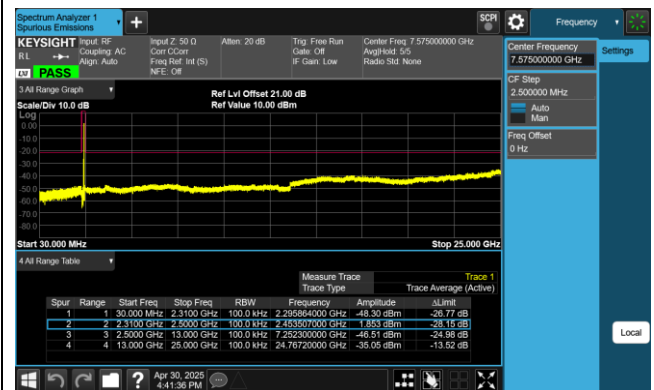


802.11 ax20 CH01 (2412MHz)

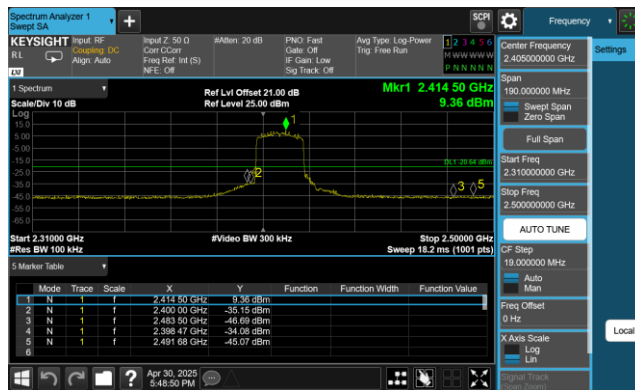


802.11 ax20 CH01 (2412MHz)

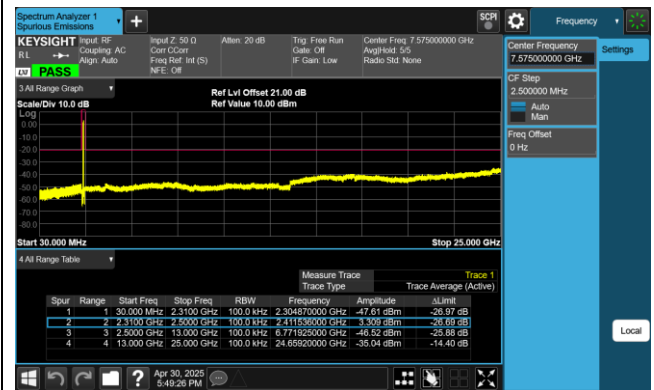


802.11 ax20 CH06 (2437MHz)

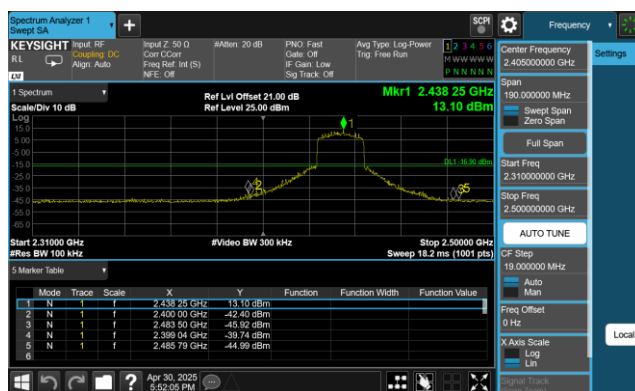


802.11 ax20 CH06 (2437MHz)

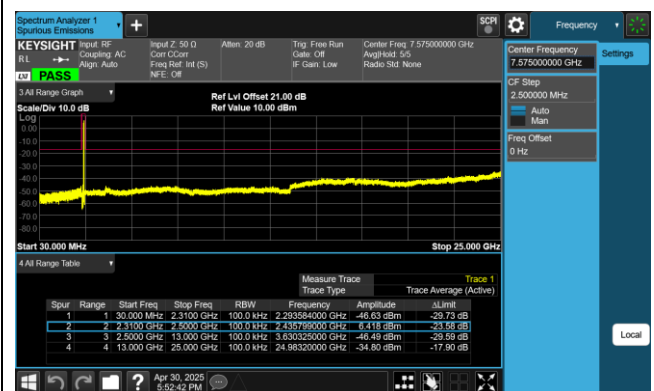


802.11 ax20 CH11 (2462MHz)

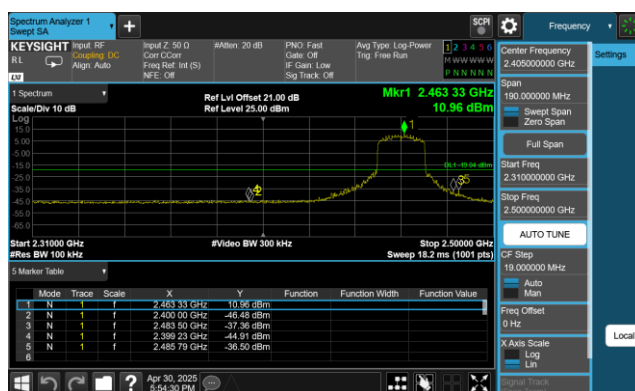


802.11 ax20 CH11 (2462MHz)

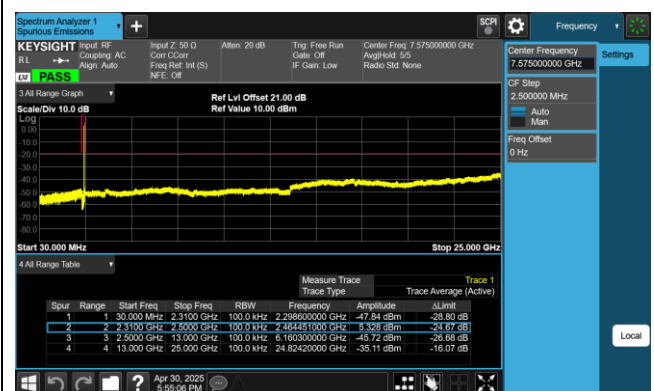


802.11 ax40 CH03 (2422MHz)

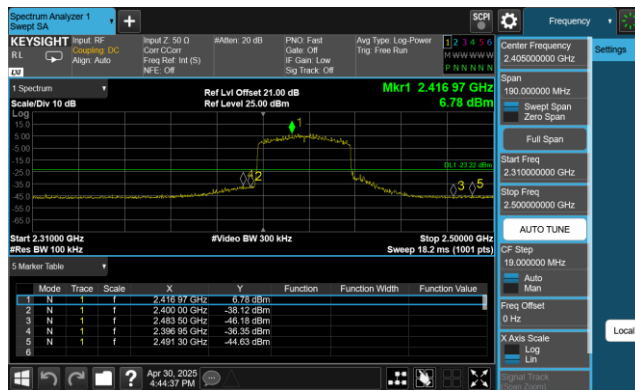


802.11 ax40 CH03 (2422MHz)

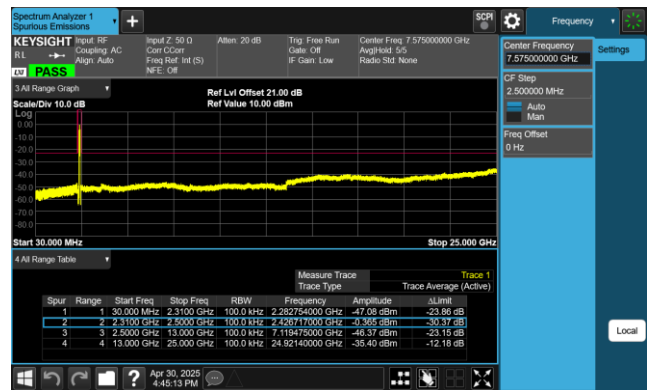

802.11 ax40 CH06 (2437MHz)

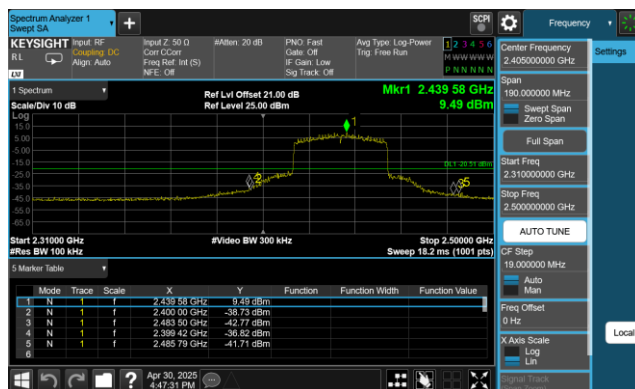


802.11 ax40 CH06 (2437MHz)

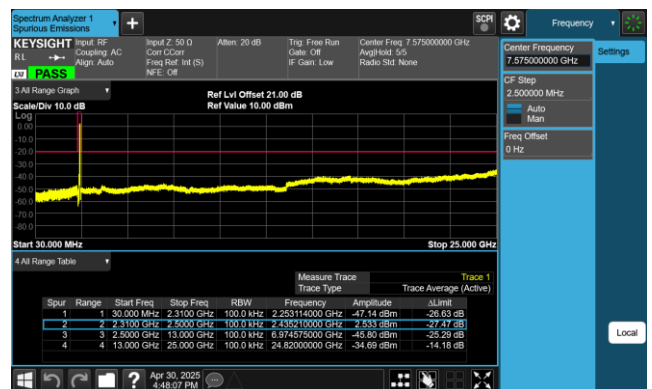


802.11 ax40 CH09 (2452MHz)




802.11 ax40 CH09 (2452MHz)

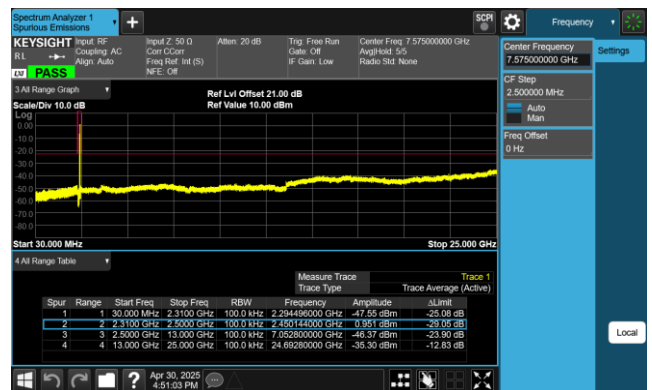


802.11be20 CH01 (2412MHz)

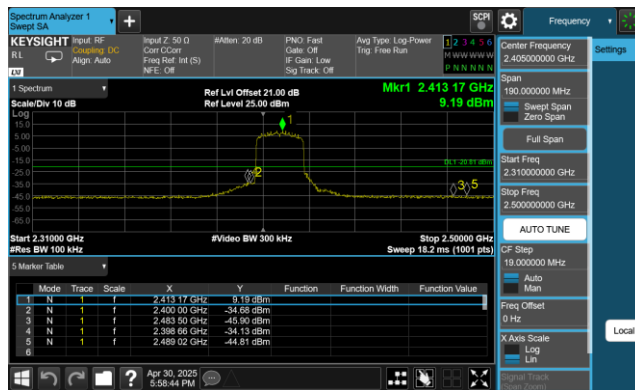


802.11be20 CH01 (2412MHz)

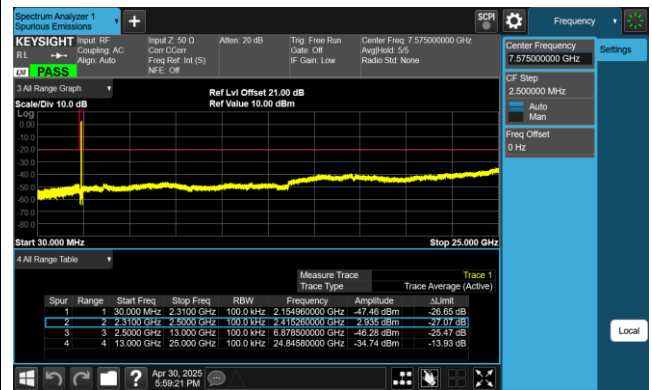


802.11be20 CH06 (2437MHz)

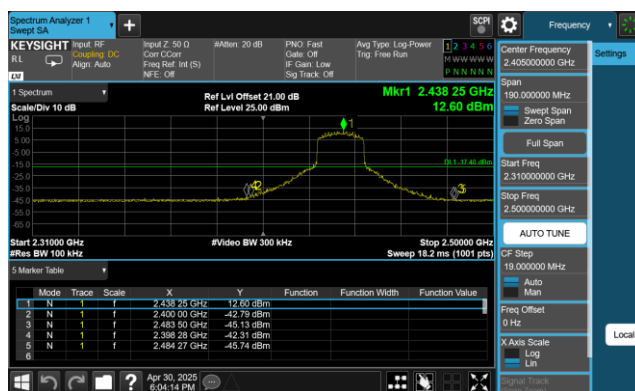


802.11be20 CH06 (2437MHz)

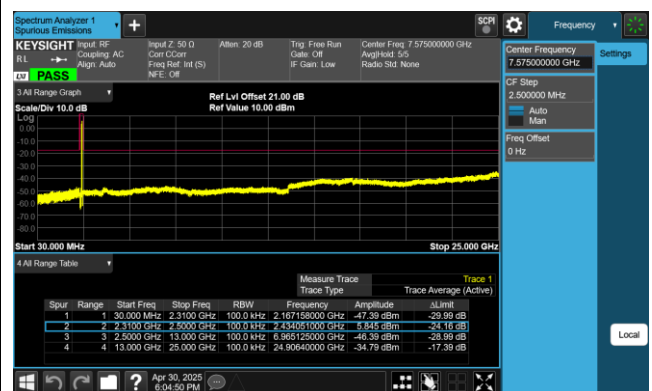


802.11be20 CH11 (2462MHz)

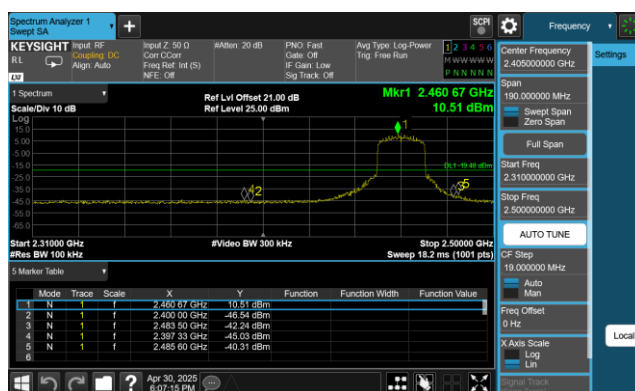


802.11be20 CH11 (2462MHz)

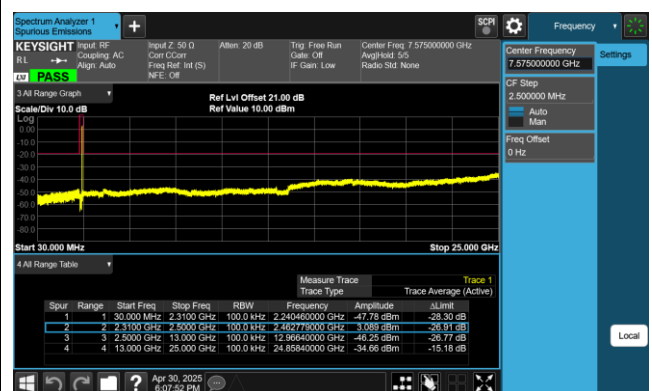


802.11be40 CH03 (2422MHz)

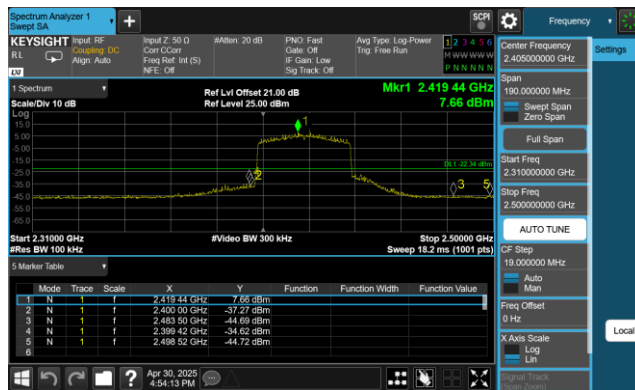


802.11be40 CH03 (2422MHz)

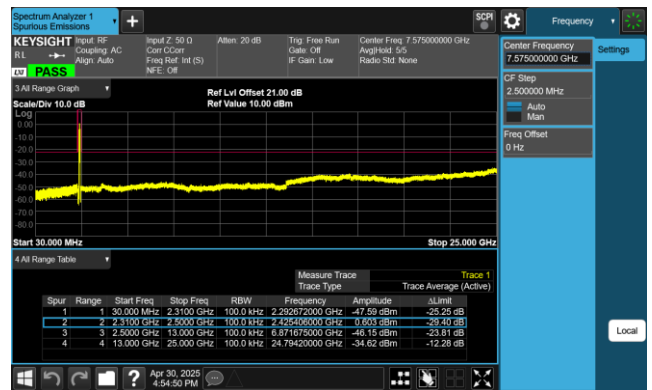


802.11be40 CH06 (2437MHz)

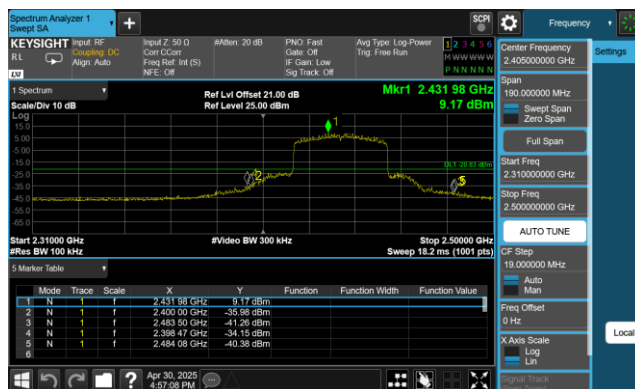


802.11be40 CH06 (2437MHz)

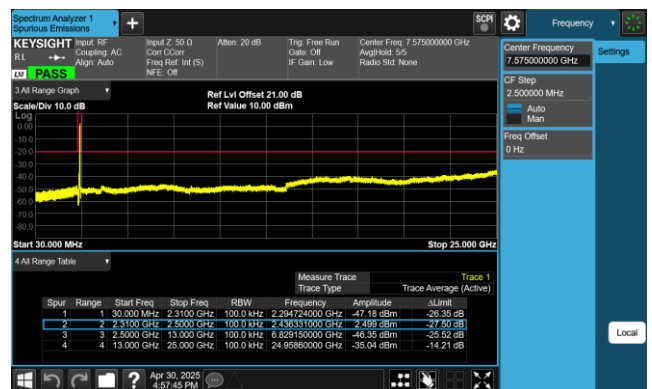

802.11be40 CH09 (2452MHz)

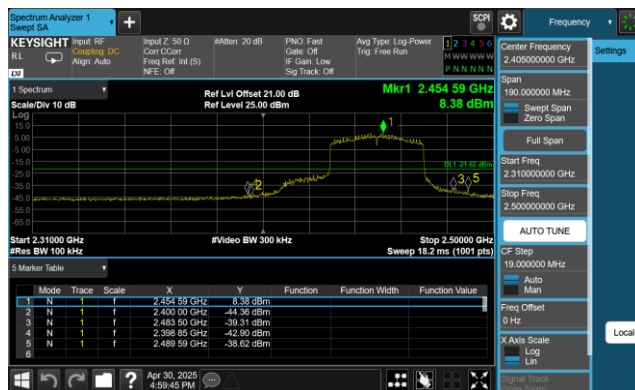

802.11be40 CH09 (2452MHz)

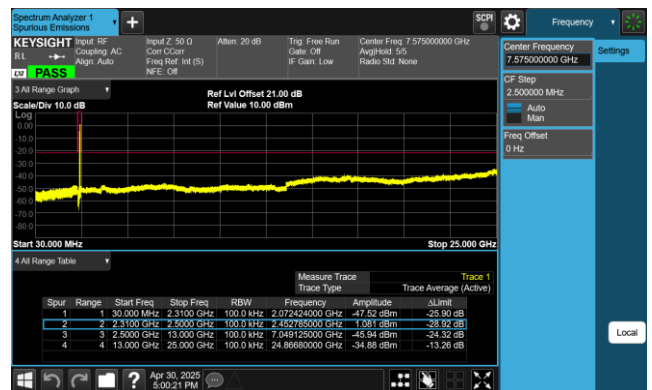

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

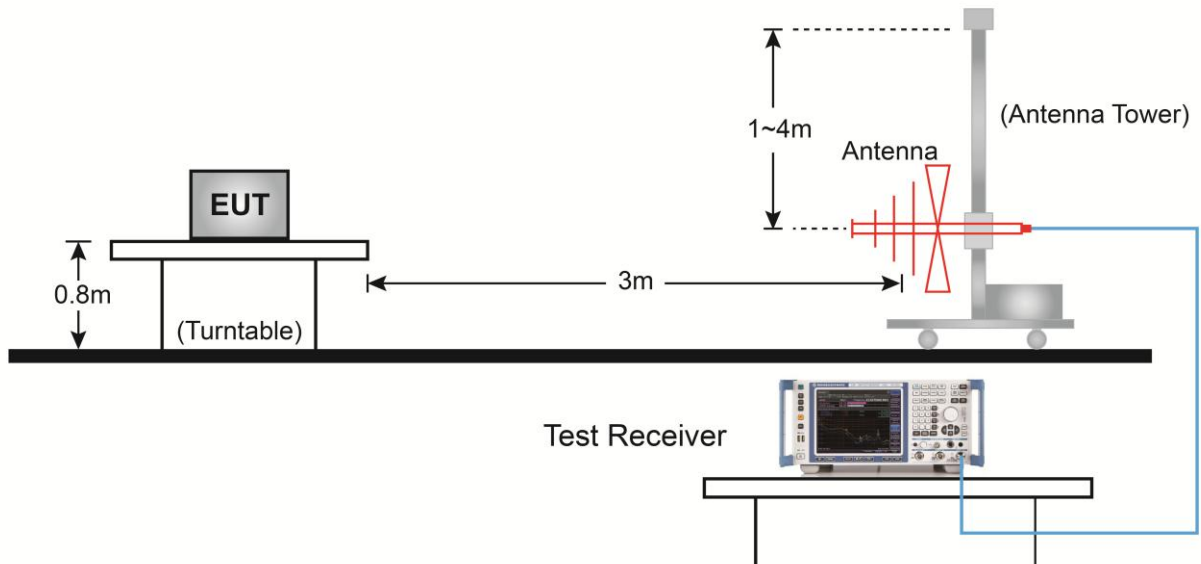


Above 1GHz Test Setup:

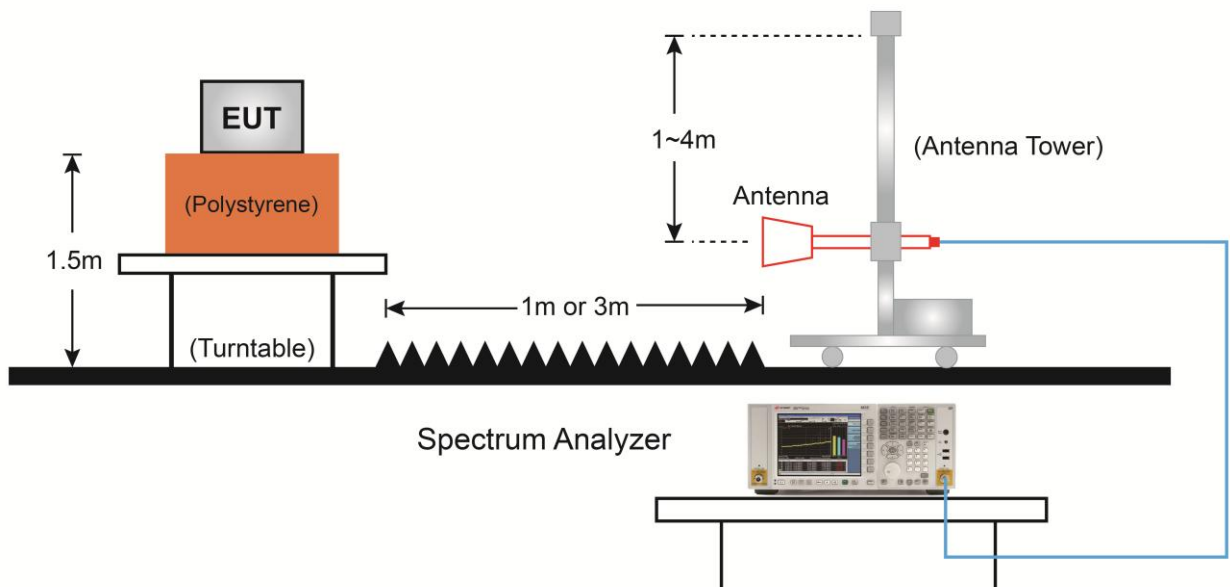

7.6.5. Test Result

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-10
Factor	VULB 9162	Temp. / Humidity	25°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

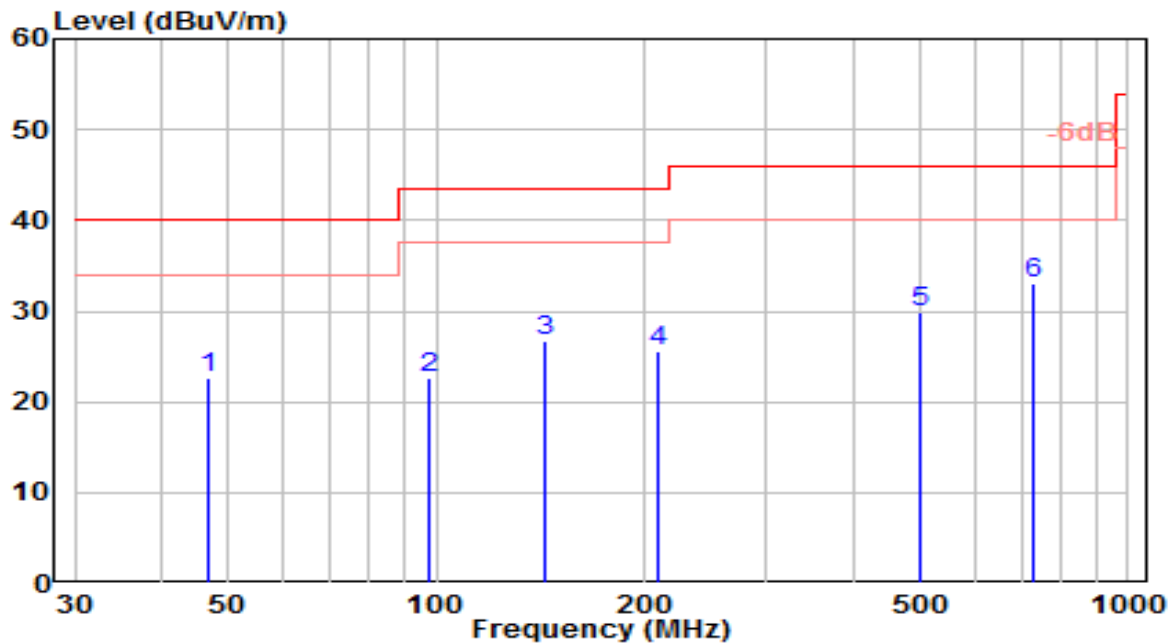


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	46.855	1.54	21.10	22.64	-17.36	40.00	100	230	QP
2	97.394	4.22	18.44	22.65	-20.85	43.50	150	250	QP
3	143.218	11.34	15.36	26.70	-16.80	43.50	150	265	QP
4	208.674	7.16	18.33	25.49	-18.01	43.50	150	280	QP
5	502.309	4.36	25.52	29.88	-16.12	46.00	150	60	QP
6	* 729.636	3.83	29.23	33.06	-12.94	46.00	100	355	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-10
Factor	VULB 9162	Temp. / Humidity	25°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

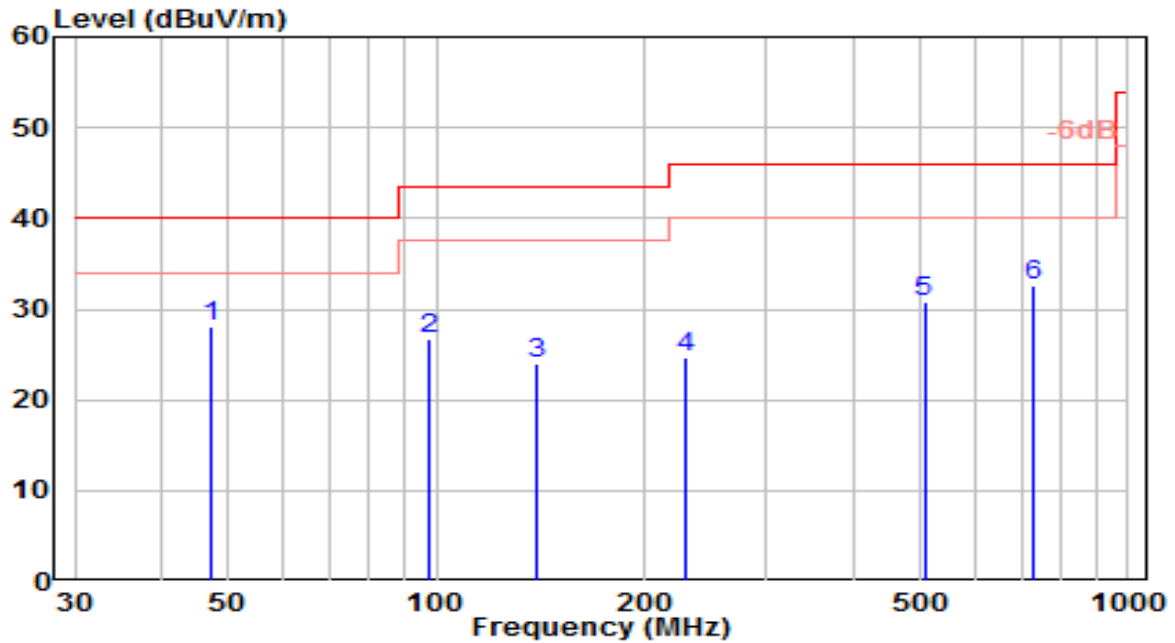


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	47.285	6.98	21.12	28.10	-11.90	40.00	100	215	QP
2		97.818	8.17	18.51	26.68	-16.82	43.50	100	330	QP
3		139.886	8.69	15.26	23.94	-19.56	43.50	100	185	QP
4		229.536	5.04	19.53	24.57	-21.43	46.00	100	260	QP
5		507.497	5.16	25.58	30.74	-15.26	46.00	100	90	QP
6		732.162	3.29	29.28	32.57	-13.43	46.00	100	190	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

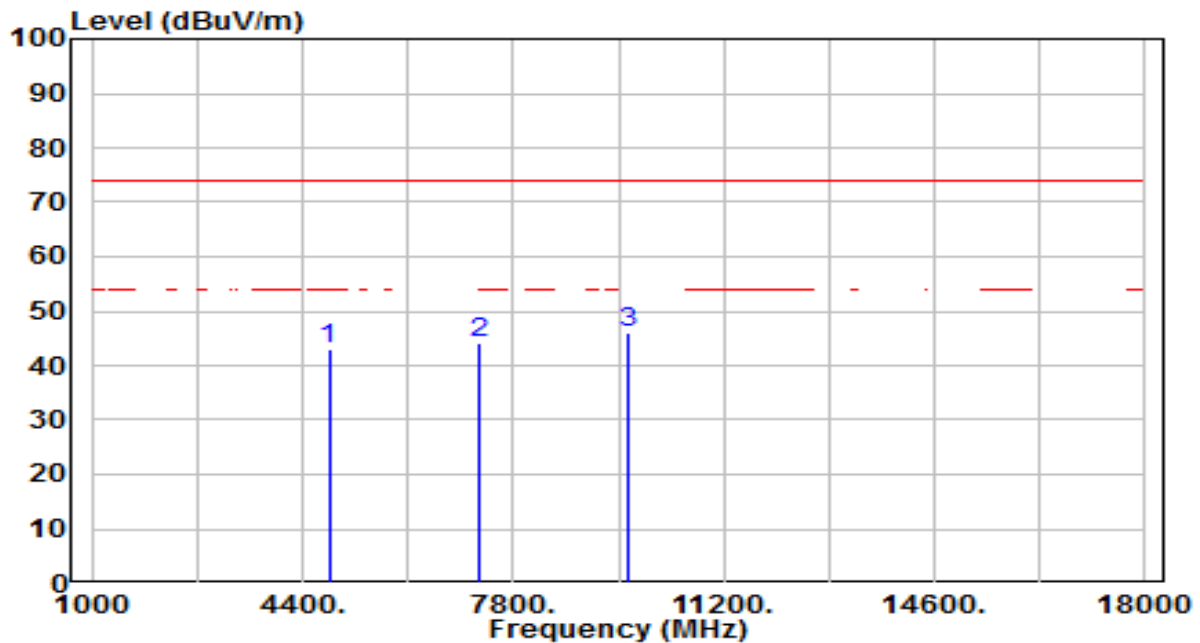


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	38.58	4.34	42.92	-31.08	74.00	100	355	Peak
2	7236.000	31.52	12.73	44.25	-29.75	74.00	100	166	Peak
3	* 9648.000	29.44	16.74	46.18	-27.82	74.00	100	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

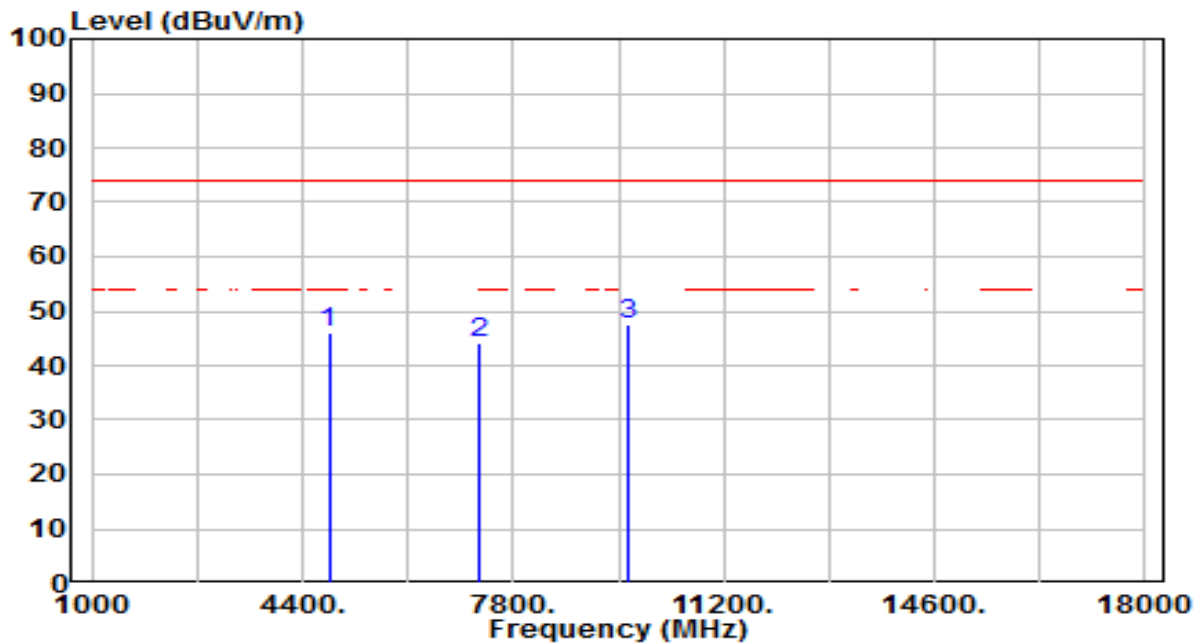


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	41.52	4.34	45.87	-28.13	74.00	100	50	Peak
2	7236.000	31.49	12.73	44.22	-29.78	74.00	100	360	Peak
3	* 9648.000	30.85	16.74	47.59	-26.41	74.00	100	354	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

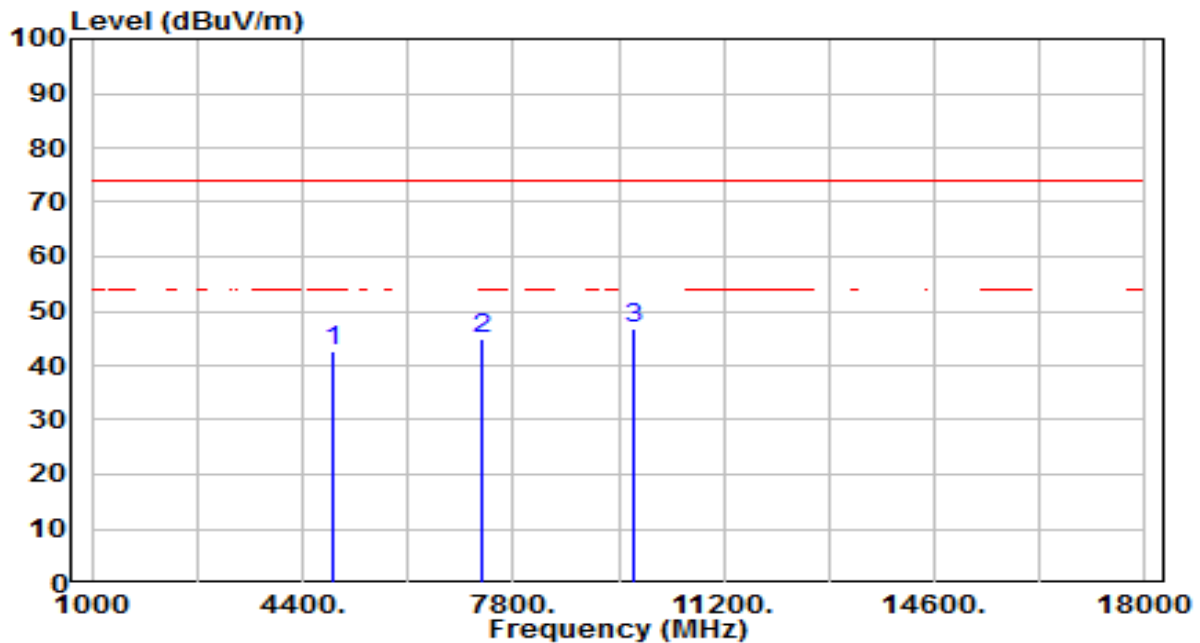


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.07	4.46	42.53	-31.47	74.00	100	356	Peak
2	7311.000	31.79	13.13	44.92	-29.08	74.00	100	272	Peak
3	* 9748.000	29.76	16.92	46.67	-27.33	74.00	100	86	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

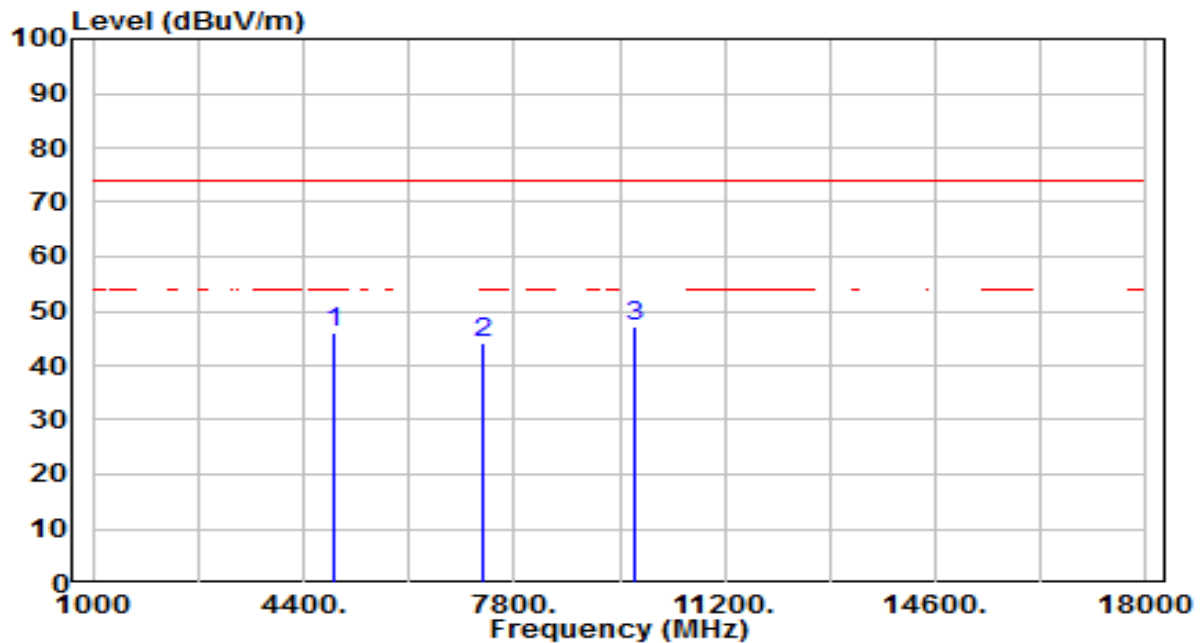


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	41.55	4.46	46.02	-27.98	74.00	100	62	Peak
2	7311.000	31.19	13.13	44.32	-29.68	74.00	100	353	Peak
3	* 9748.000	30.20	16.92	47.12	-26.88	74.00	100	186	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

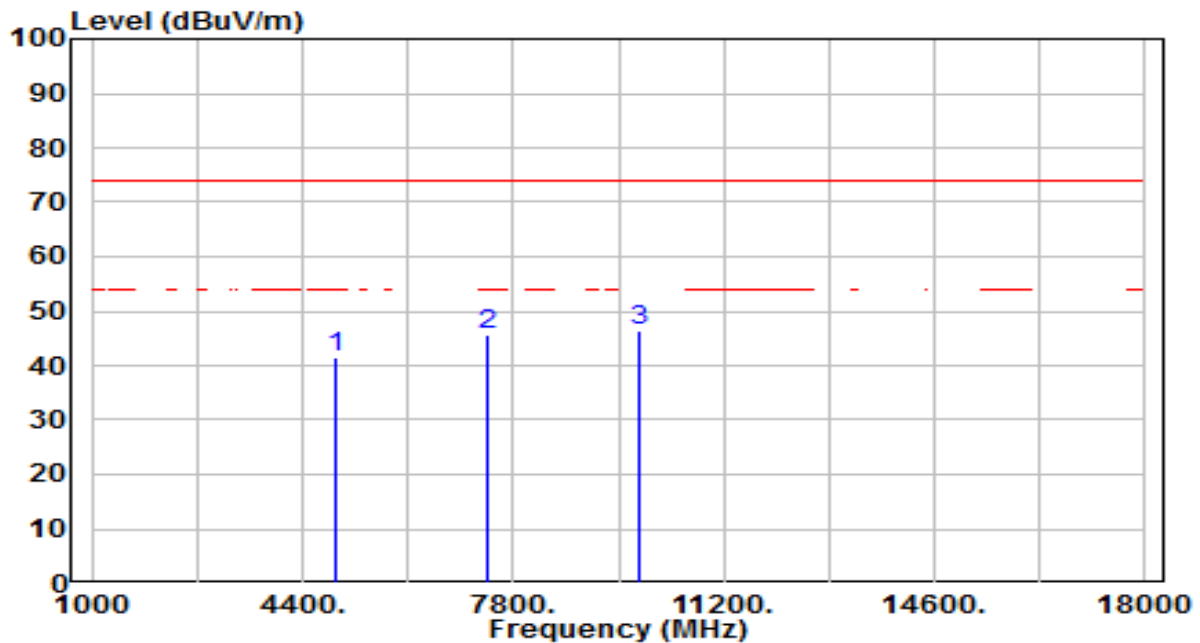


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.81	4.61	41.42	-32.58	74.00	100	360	Peak
2	7386.000	32.26	13.49	45.76	-28.24	74.00	100	84	Peak
3	* 9848.000	29.38	17.14	46.52	-27.48	74.00	100	271	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

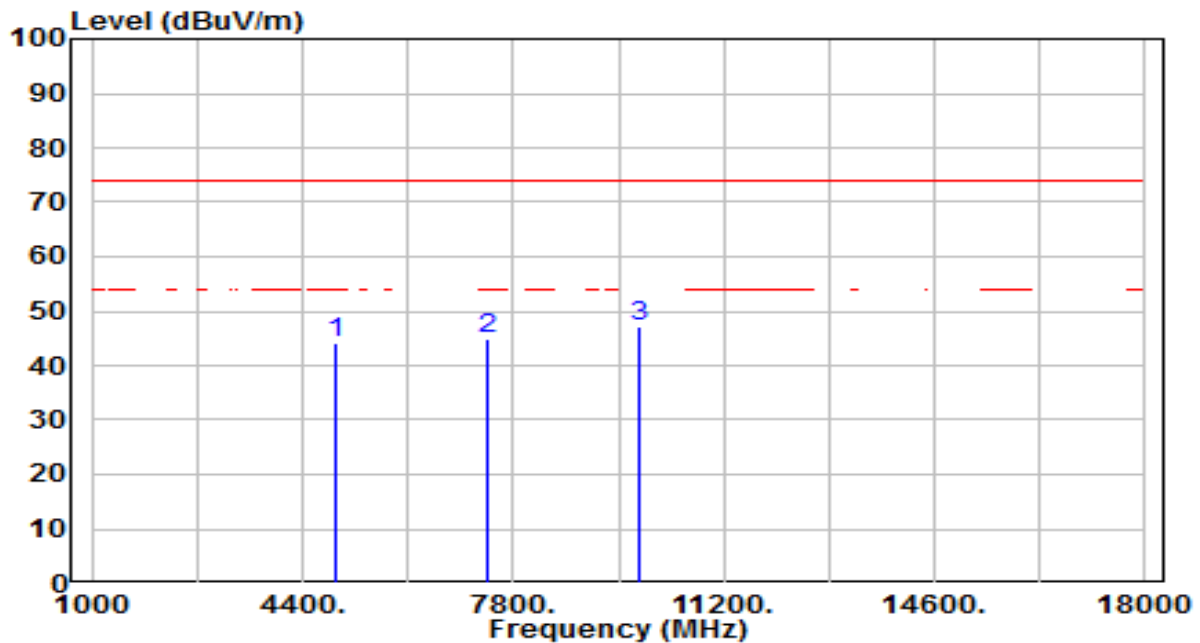


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	39.69	4.61	44.30	-29.70	74.00	100	47	Peak
2	7386.000	31.31	13.49	44.80	-29.20	74.00	100	63	Peak
3	* 9848.000	30.20	17.14	47.34	-26.66	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

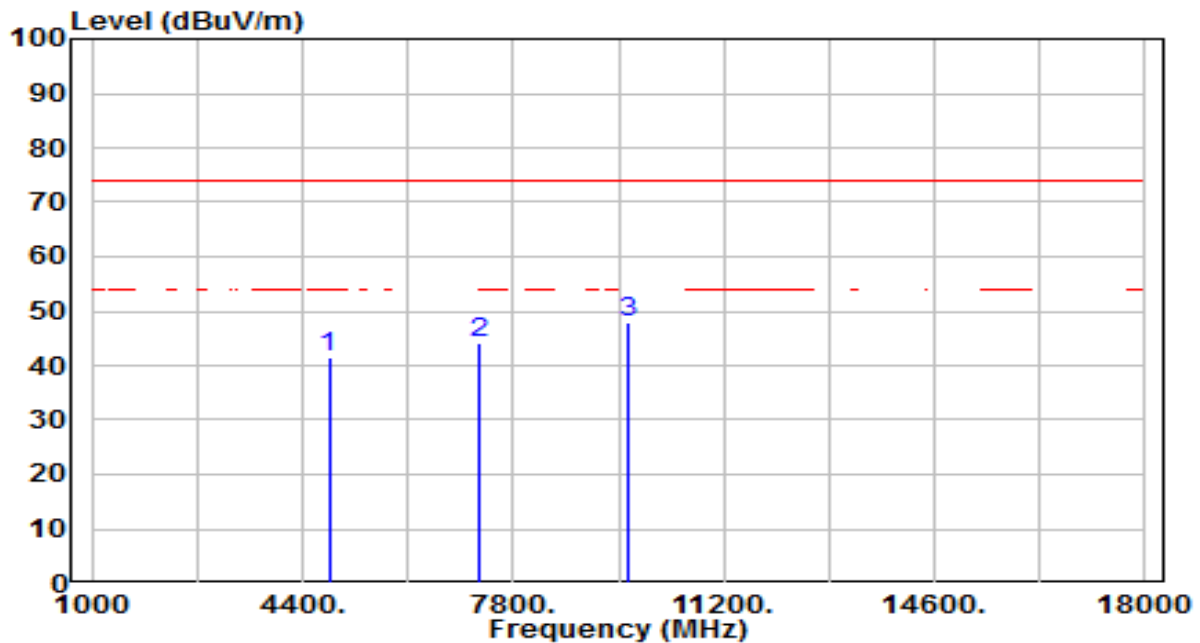


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.09	4.34	41.44	-32.56	74.00	100	48	Peak
2	7236.000	31.28	12.73	44.01	-29.99	74.00	100	115	Peak
3	* 9648.000	31.20	16.74	47.93	-26.07	74.00	100	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

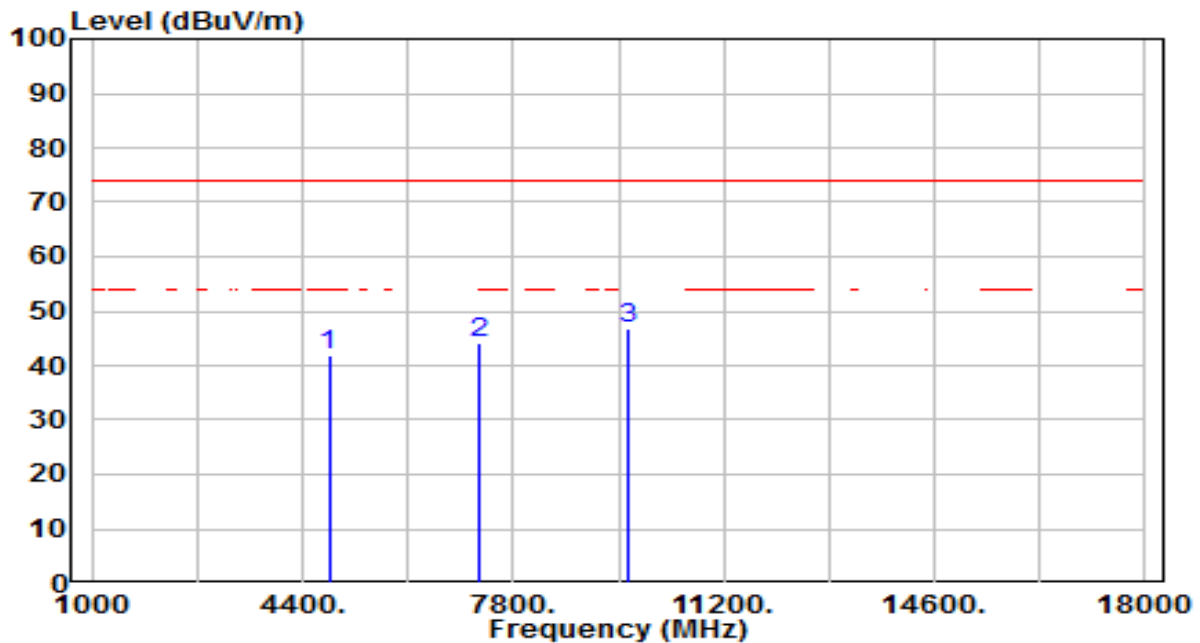


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.48	4.34	41.83	-32.17	74.00	100	63	Peak
2	7236.000	31.52	12.73	44.25	-29.75	74.00	100	348	Peak
3	* 9648.000	29.89	16.74	46.63	-27.37	74.00	100	223	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

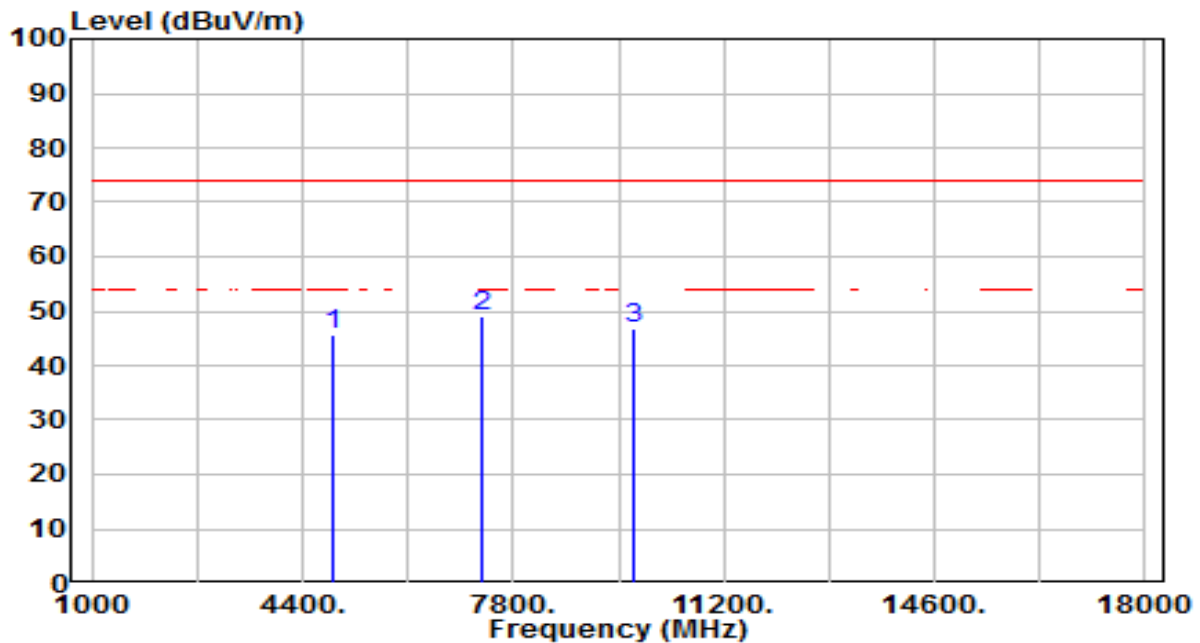


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		4874.000	41.25	4.46	45.71	-28.29	74.00	100	0	Peak
2	*	7311.000	35.78	13.13	48.90	-25.10	74.00	100	318	Peak
3		9748.000	29.78	16.92	46.70	-27.30	74.00	100	324	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

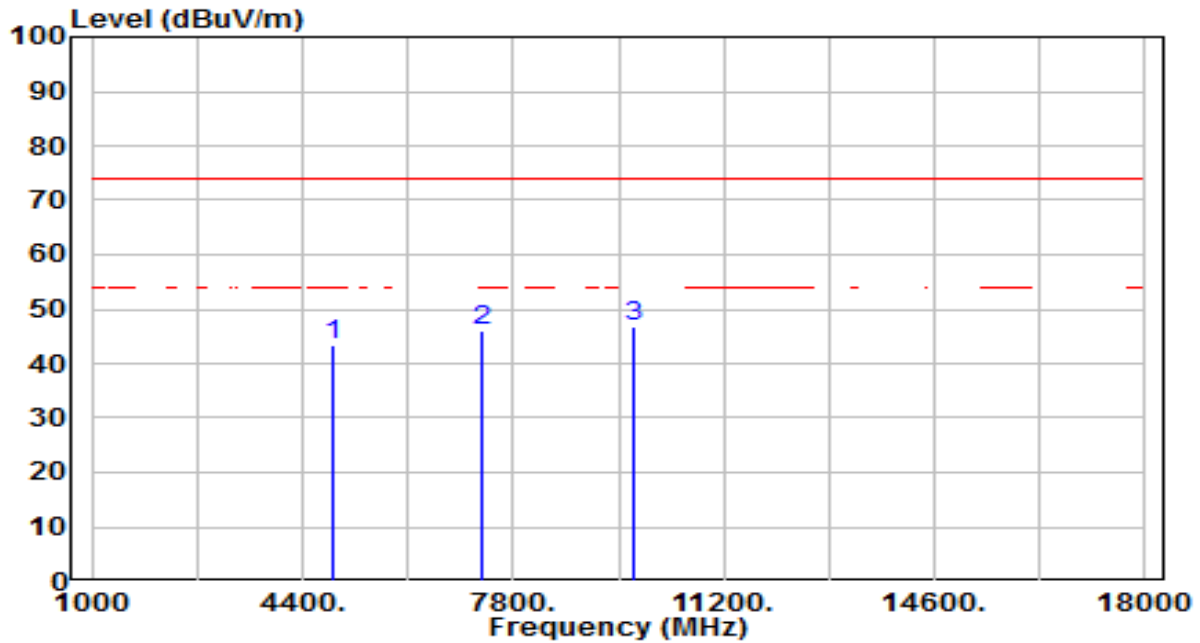


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.92	4.46	43.38	-30.62	74.00	100	296	Peak
2	7311.000	33.01	13.13	46.14	-27.86	74.00	100	290	Peak
3	* 9748.000	30.03	16.92	46.94	-27.06	74.00	100	88	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

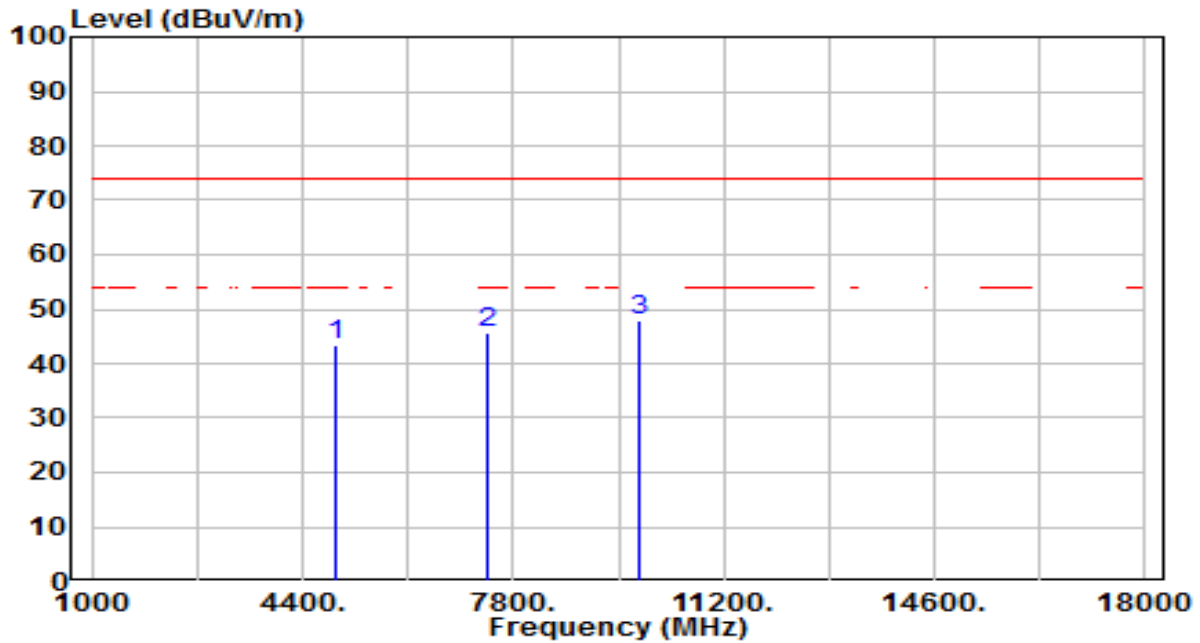


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.87	4.61	43.48	-30.52	74.00	100	354	Peak
2	7386.000	32.30	13.49	45.79	-28.21	74.00	100	224	Peak
3	* 9848.000	30.67	17.14	47.81	-26.19	74.00	100	229	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

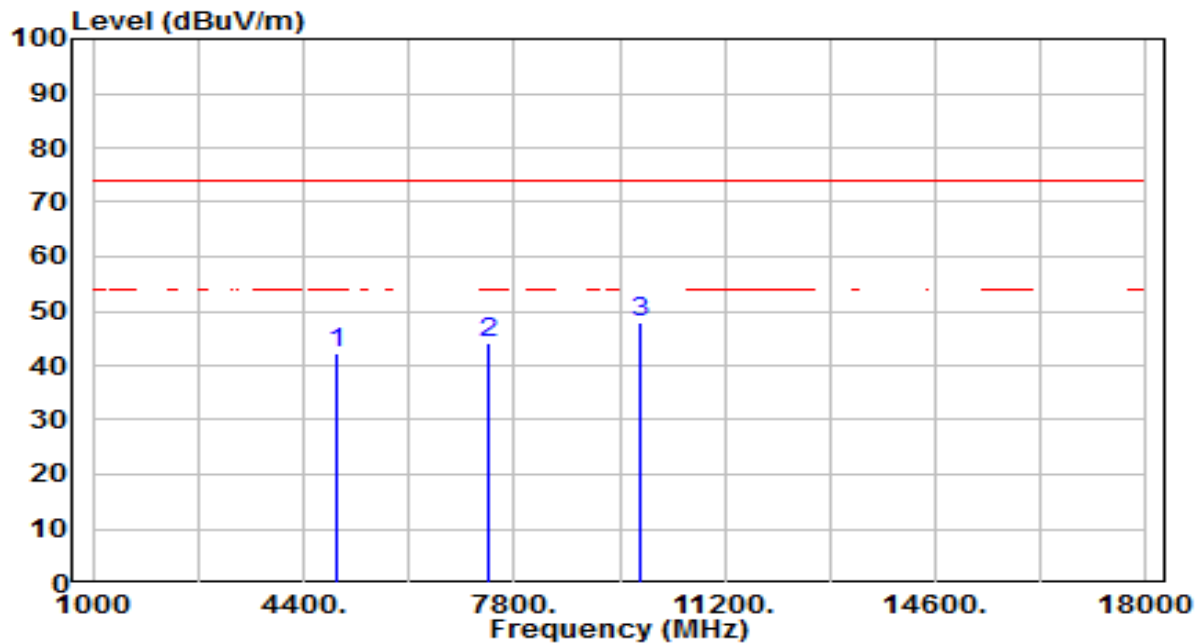


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.52	4.61	42.14	-31.86	74.00	100	79	Peak
2	7386.000	30.81	13.49	44.31	-29.69	74.00	100	89	Peak
3	* 9848.000	30.73	17.14	47.87	-26.13	74.00	100	116	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

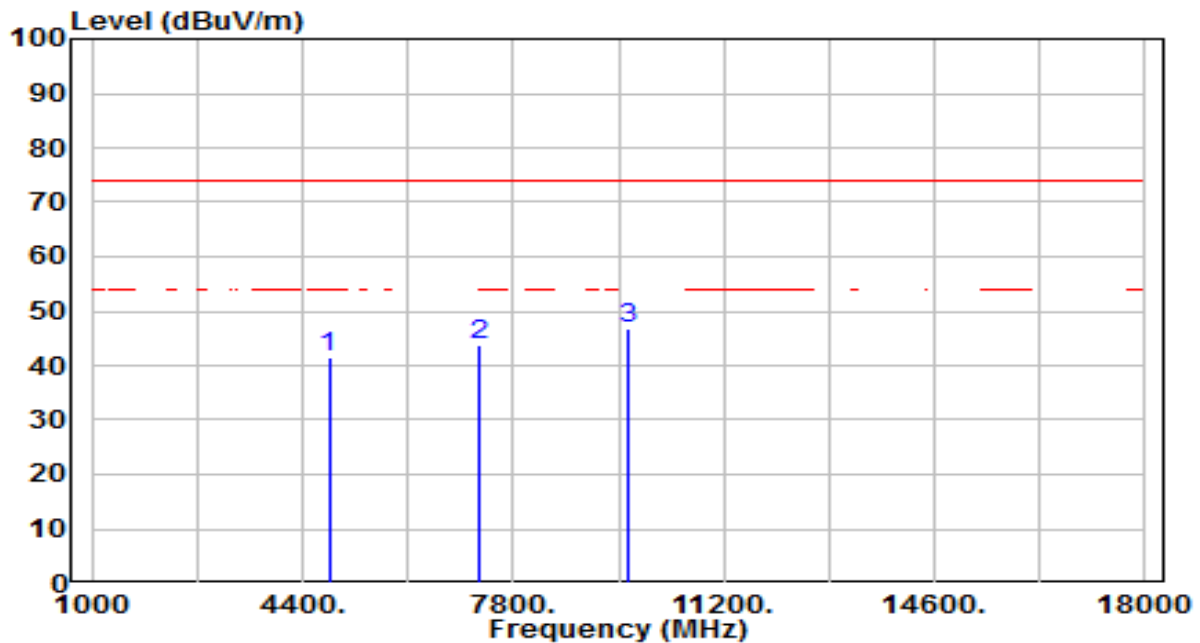


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.01	4.34	41.35	-32.65	74.00	100	0	Peak
2	7236.000	30.96	12.73	43.69	-30.31	74.00	100	261	Peak
3	* 9648.000	30.09	16.74	46.83	-27.17	74.00	100	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

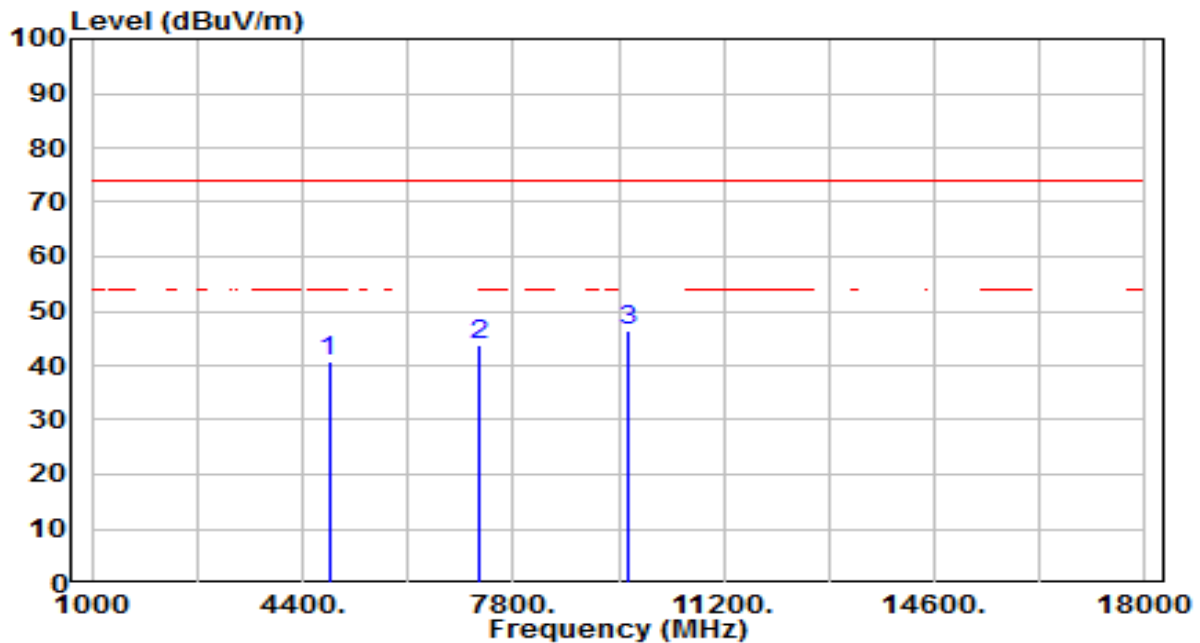


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	36.46	4.34	40.80	-33.20	74.00	100	306	Peak
2	7236.000	31.12	12.73	43.85	-30.15	74.00	100	244	Peak
3	* 9648.000	29.66	16.74	46.40	-27.60	74.00	100	213	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

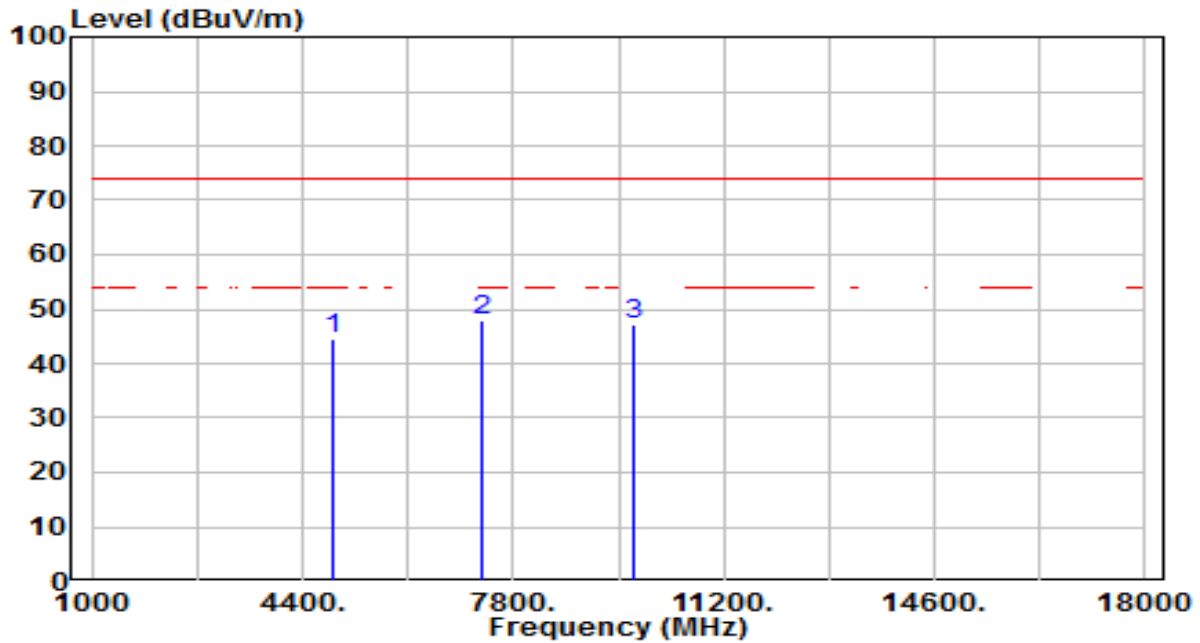


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	40.13	4.46	44.60	-29.40	74.00	100	357	Peak
2	* 7311.000	34.90	13.13	48.03	-25.97	74.00	100	190	Peak
3	9748.000	30.34	16.92	47.26	-26.74	74.00	100	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

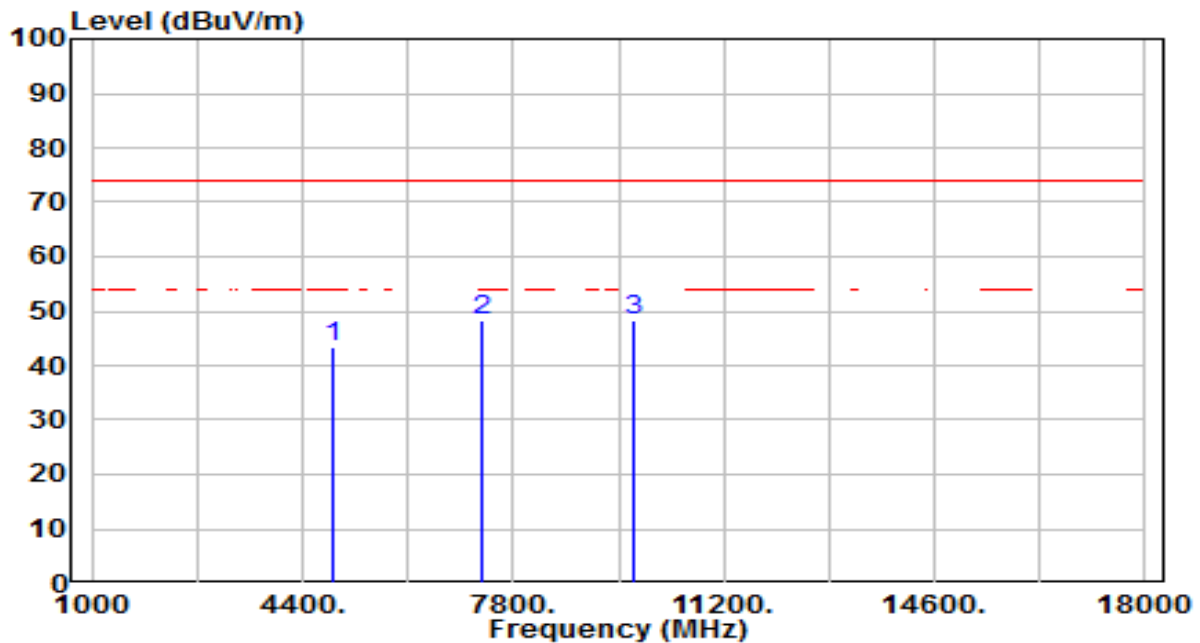


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.08	4.46	43.54	-30.46	74.00	100	317	Peak
2	* 7311.000	35.24	13.13	48.37	-25.63	74.00	100	104	Peak
3	9748.000	31.42	16.92	48.34	-25.66	74.00	100	291	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

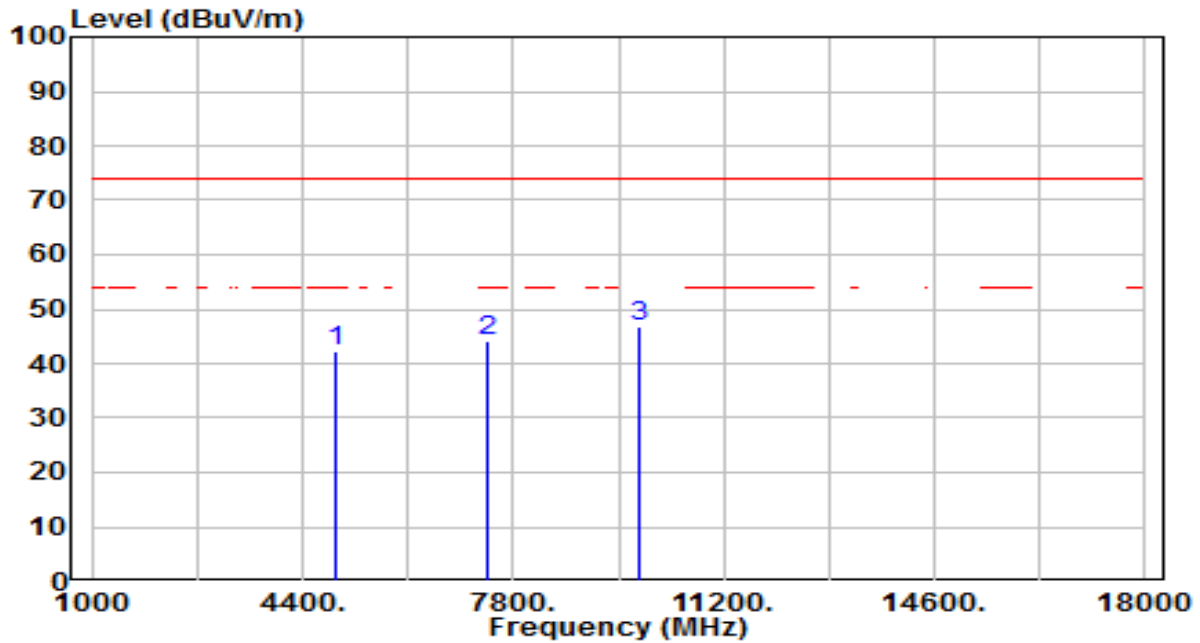


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.65	4.61	42.26	-31.74	74.00	100	349	Peak
2	7386.000	30.84	13.49	44.33	-29.67	74.00	100	95	Peak
3	* 9848.000	29.55	17.14	46.69	-27.31	74.00	100	292	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

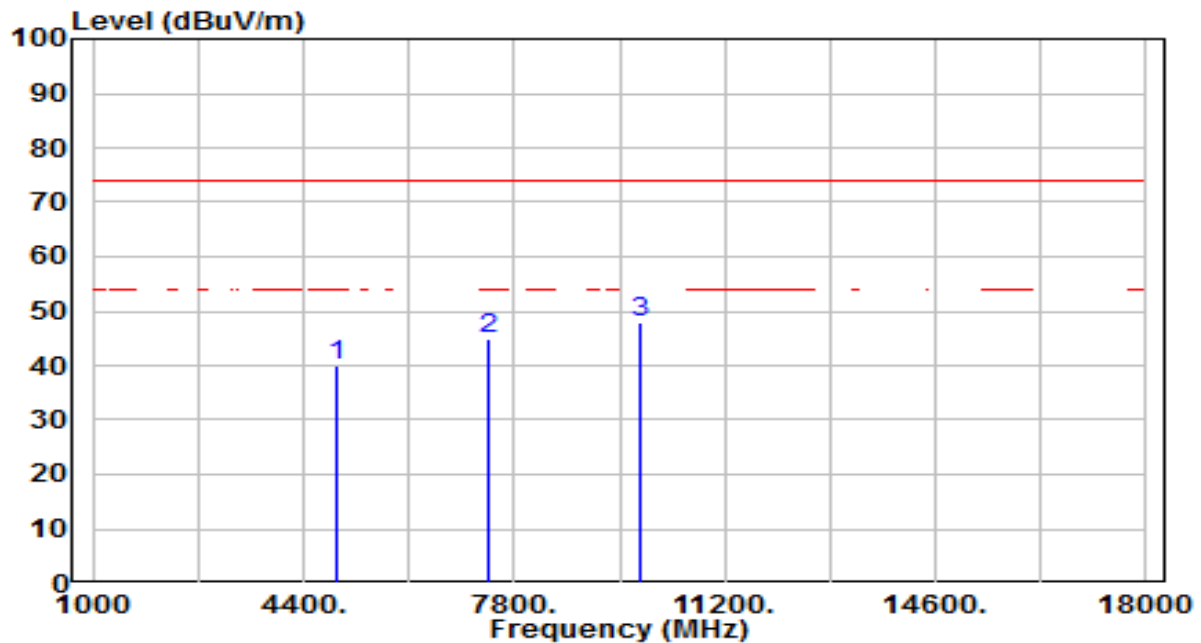


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	35.33	4.61	39.95	-34.05	74.00	100	88	Peak
2	7386.000	31.42	13.49	44.91	-29.09	74.00	100	46	Peak
3	* 9848.000	30.74	17.14	47.88	-26.12	74.00	100	171	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

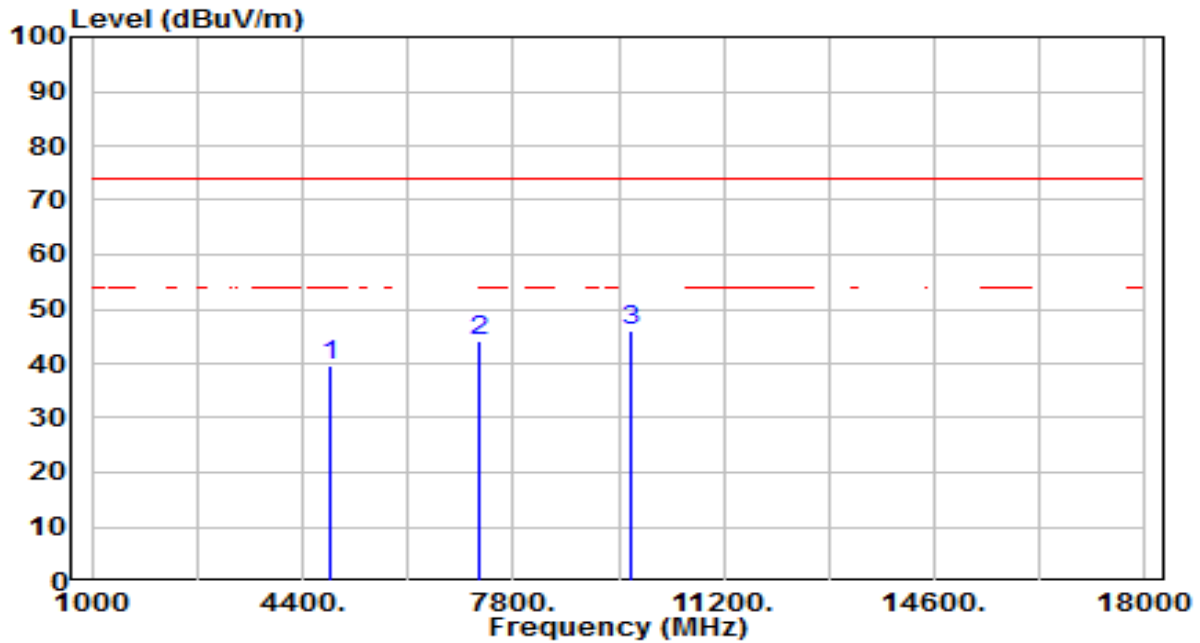


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	35.23	4.39	39.63	-34.37	74.00	100	153	Peak
2	7266.000	31.21	12.89	44.10	-29.90	74.00	100	142	Peak
3	* 9688.000	29.34	16.78	46.12	-27.88	74.00	100	298	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

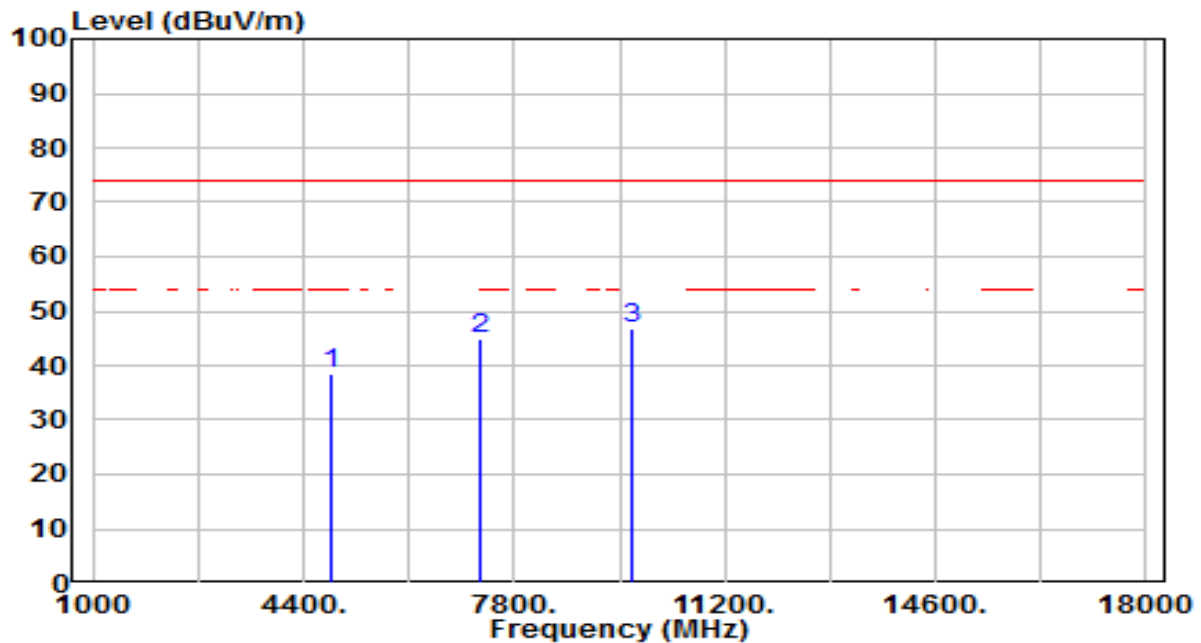


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.15	4.39	38.54	-35.46	74.00	100	47	Peak
2	7266.000	32.07	12.89	44.96	-29.04	74.00	100	187	Peak
3	* 9688.000	30.19	16.78	46.97	-27.03	74.00	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

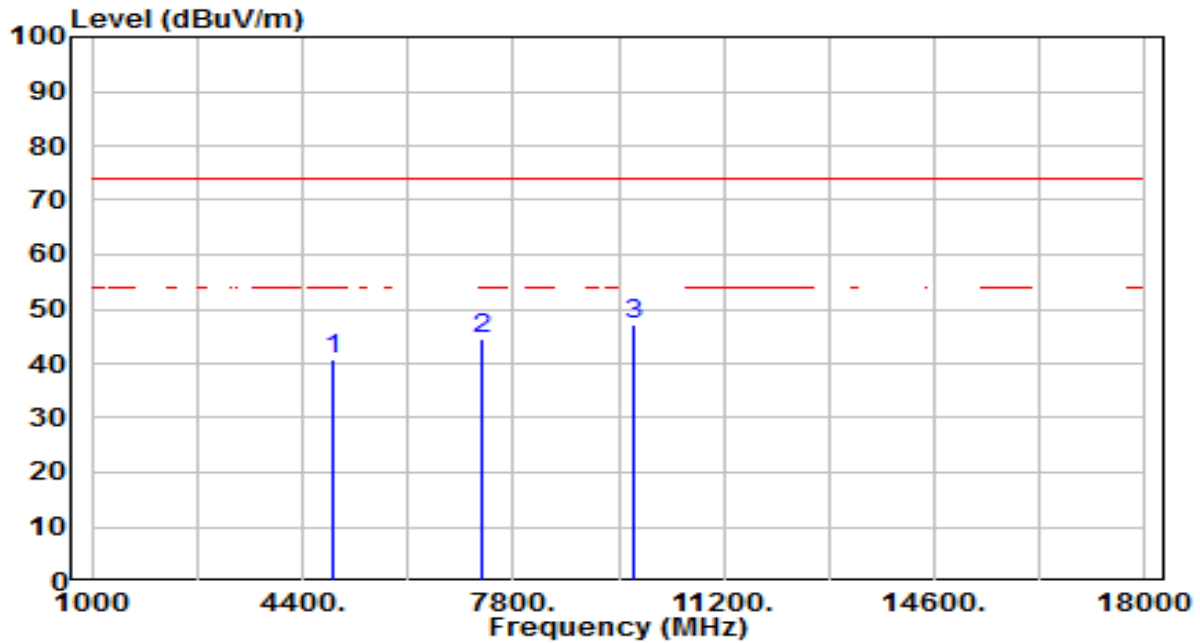


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.25	4.46	40.71	-33.29	74.00	100	0	Peak
2	7311.000	31.41	13.13	44.53	-29.47	74.00	100	210	Peak
3	* 9748.000	30.35	16.92	47.27	-26.73	74.00	100	252	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

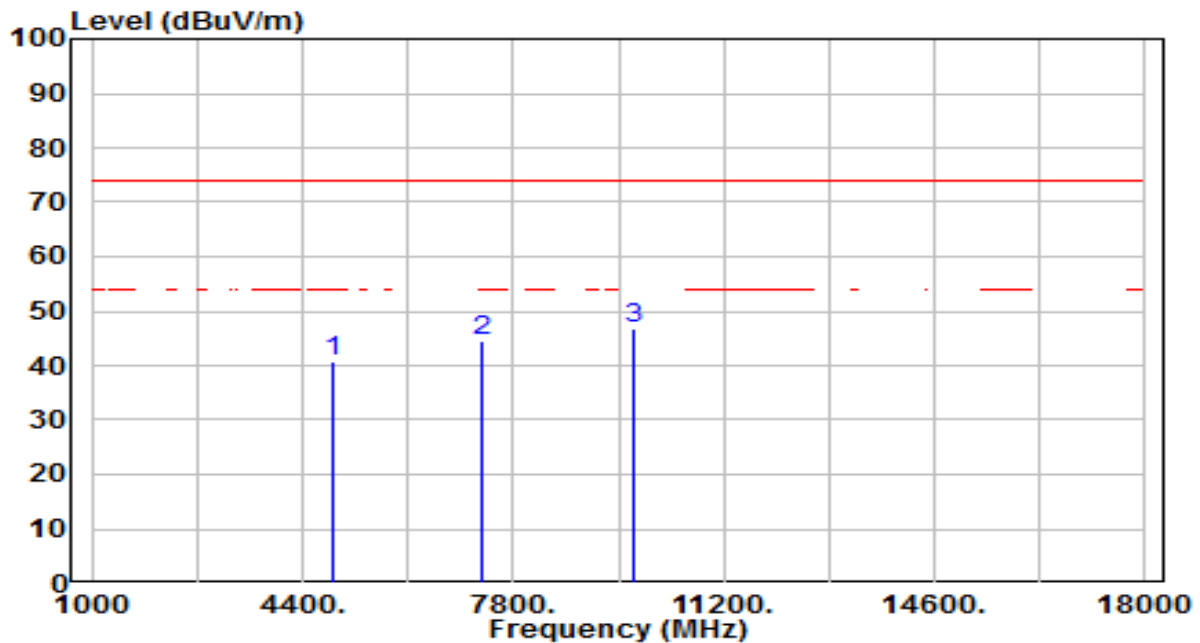


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	36.12	4.46	40.59	-33.41	74.00	100	317	Peak
2	7311.000	31.56	13.13	44.69	-29.31	74.00	100	146	Peak
3	* 9748.000	29.75	16.92	46.67	-27.33	74.00	100	197	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

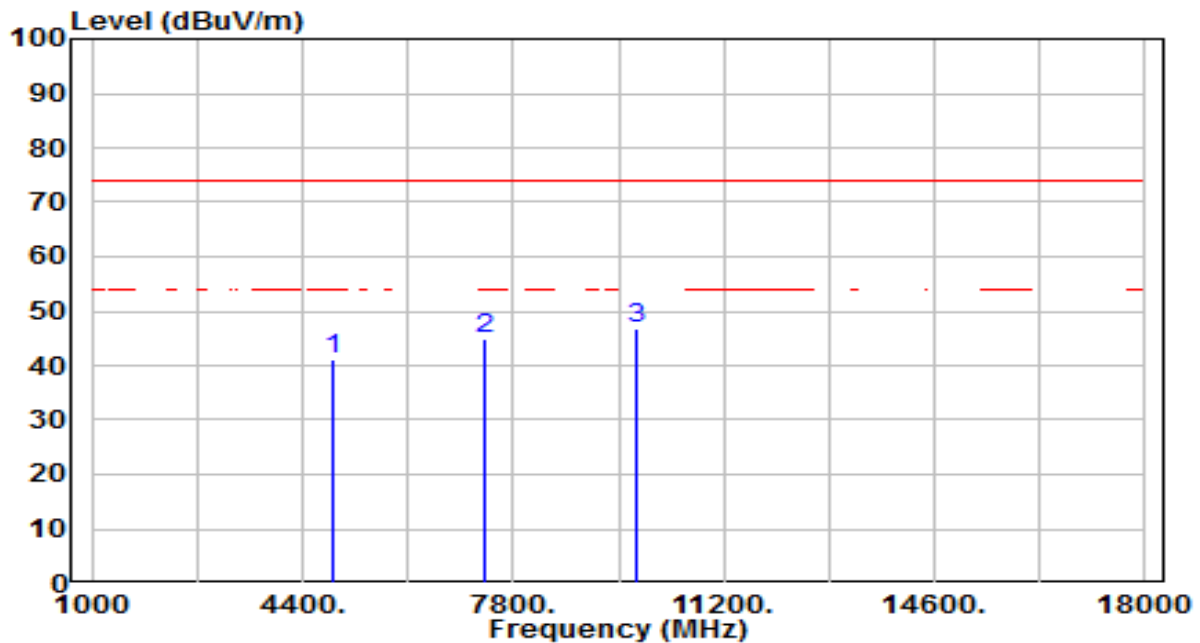


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	36.76	4.54	41.30	-32.70	74.00	100	354	Peak
2	7356.000	31.54	13.35	44.89	-29.11	74.00	100	54	Peak
3	* 9808.000	29.69	17.06	46.75	-27.25	74.00	100	250	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

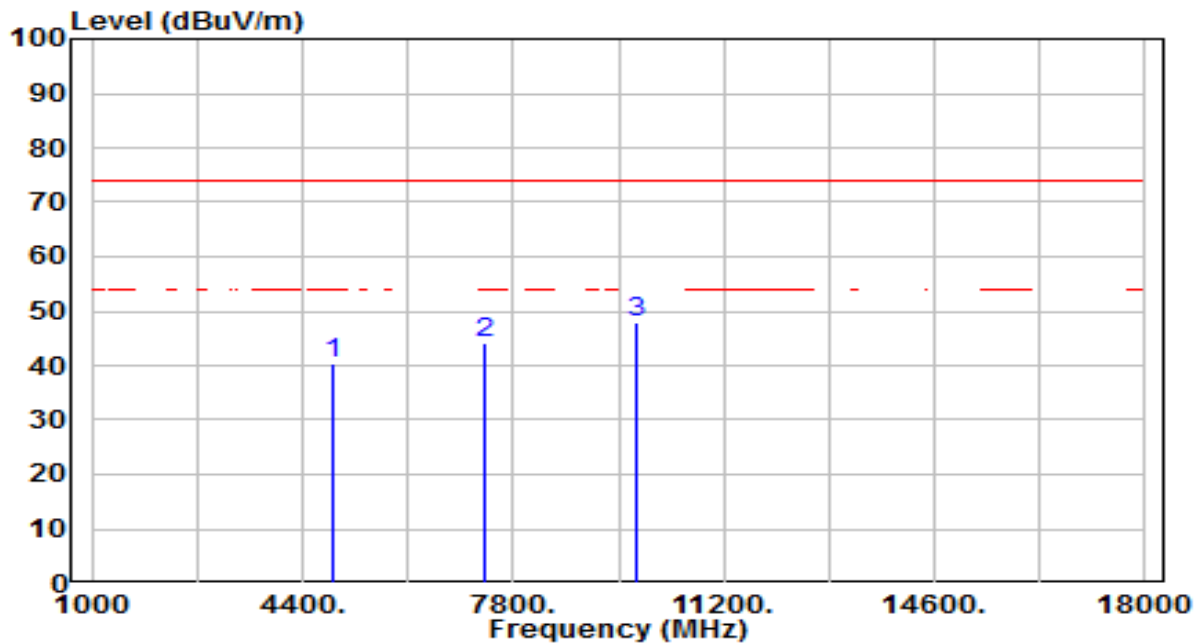


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	35.67	4.54	40.21	-33.79	74.00	100	311	Peak
2	7356.000	30.90	13.35	44.25	-29.75	74.00	100	311	Peak
3	* 9808.000	30.84	17.06	47.90	-26.10	74.00	100	357	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

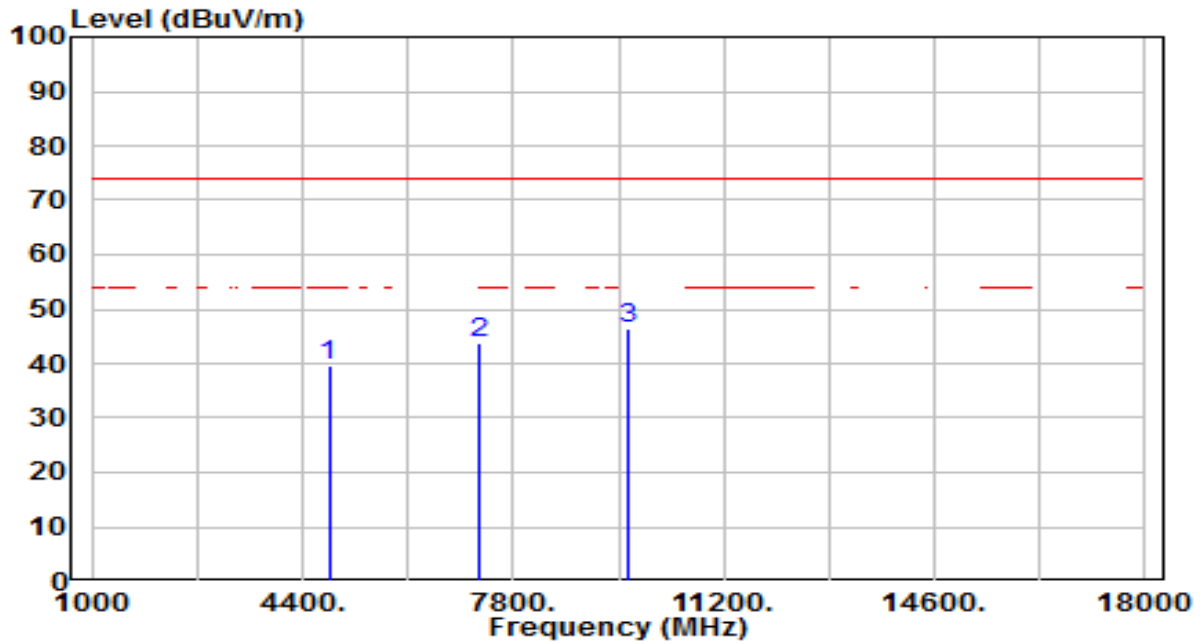


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.21	4.34	39.56	-34.44	74.00	100	355	Peak
2	7236.000	30.93	12.73	43.66	-30.34	74.00	100	256	Peak
3	* 9648.000	29.74	16.74	46.48	-27.52	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

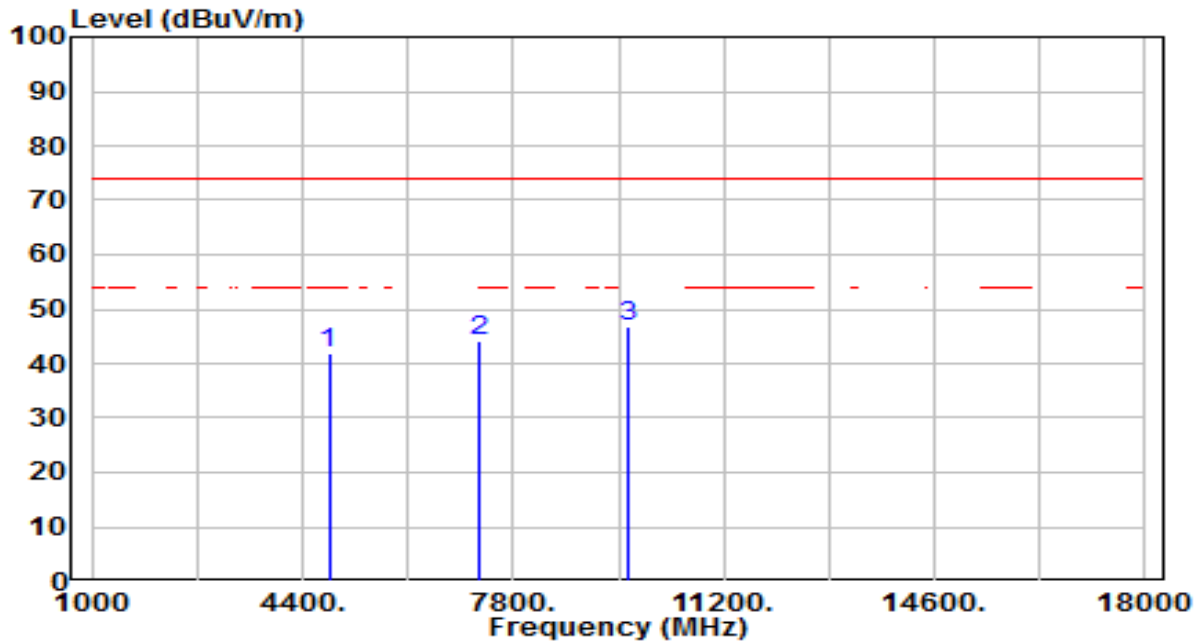


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	37.71	4.34	42.05	-31.95	74.00	100	317	Peak
2	7236.000	31.46	12.73	44.19	-29.81	74.00	100	145	Peak
3	* 9648.000	30.21	16.74	46.95	-27.05	74.00	100	57	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

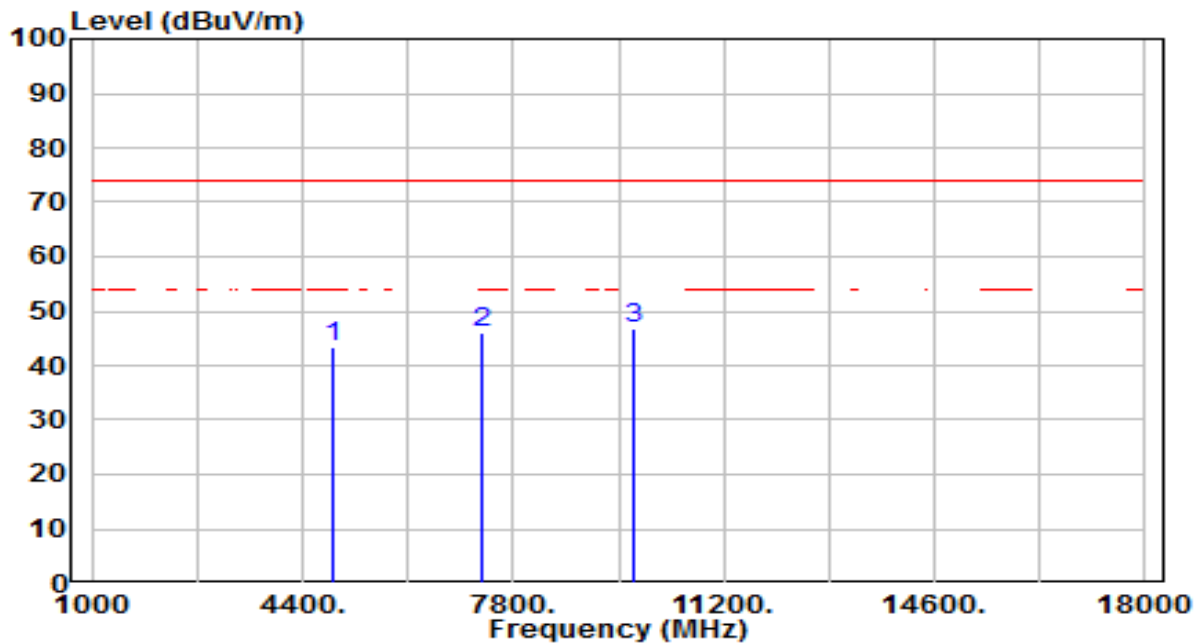


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.99	4.46	43.46	-30.54	74.00	100	349	Peak
2	7311.000	32.94	13.13	46.07	-27.93	74.00	100	33	Peak
3	* 9748.000	29.94	16.92	46.86	-27.14	74.00	100	106	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

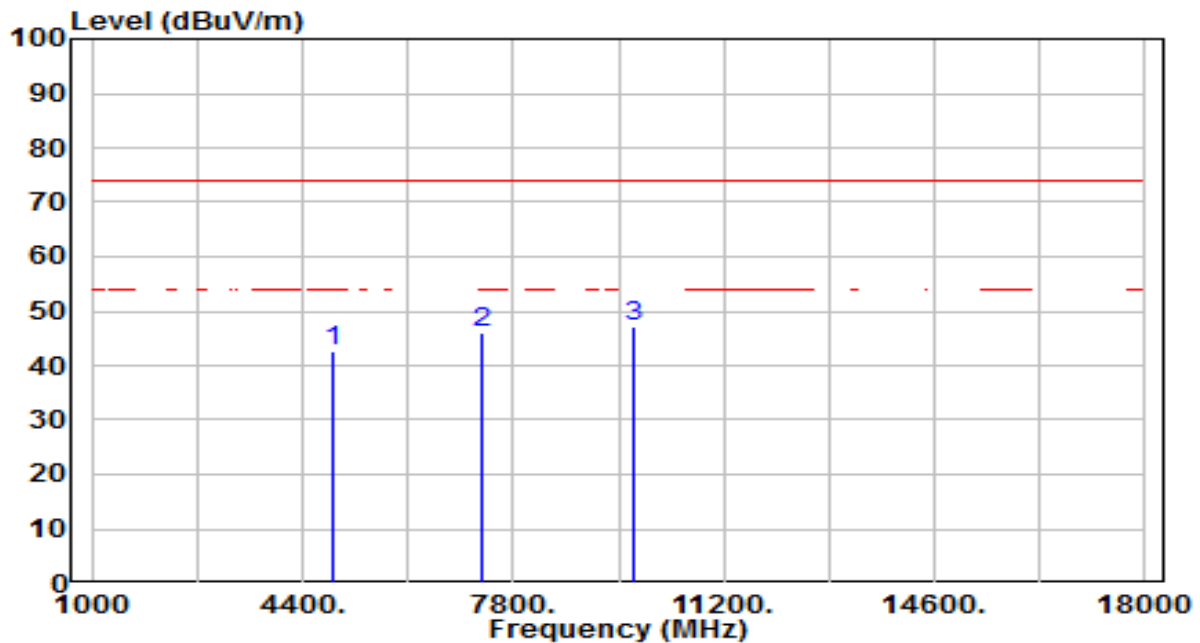


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.27	4.46	42.73	-31.27	74.00	100	322	Peak
2	7311.000	33.05	13.13	46.18	-27.82	74.00	100	98	Peak
3	* 9748.000	30.25	16.92	47.17	-26.83	74.00	100	328	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

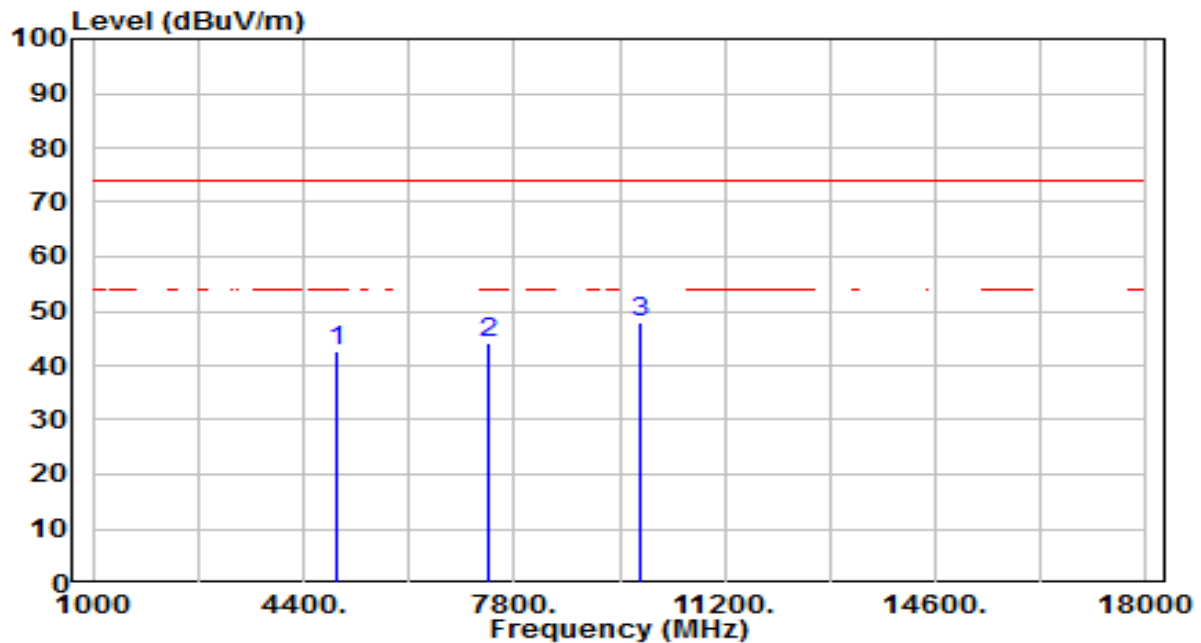


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	38.16	4.61	42.78	-31.22	74.00	100	360	Peak
2	7386.000	30.68	13.49	44.18	-29.82	74.00	100	303	Peak
3	* 9848.000	30.80	17.14	47.94	-26.06	74.00	100	53	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

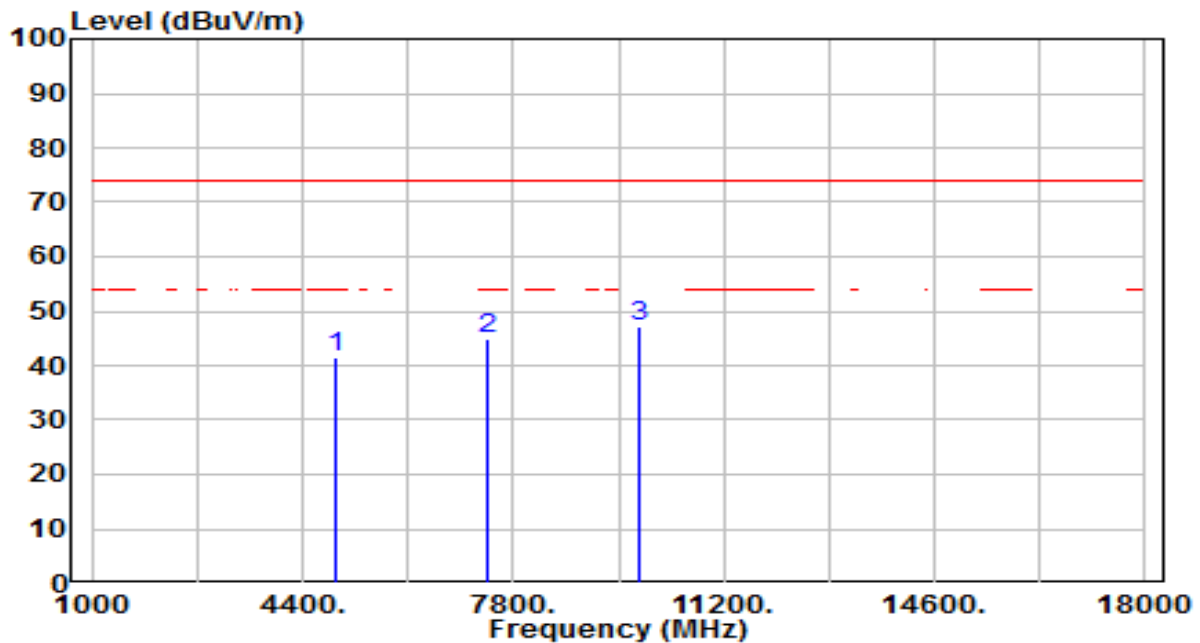


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.93	4.61	41.54	-32.46	74.00	100	311	Peak
2	7386.000	31.30	13.49	44.79	-29.21	74.00	100	196	Peak
3	* 9848.000	29.92	17.14	47.06	-26.94	74.00	100	30	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

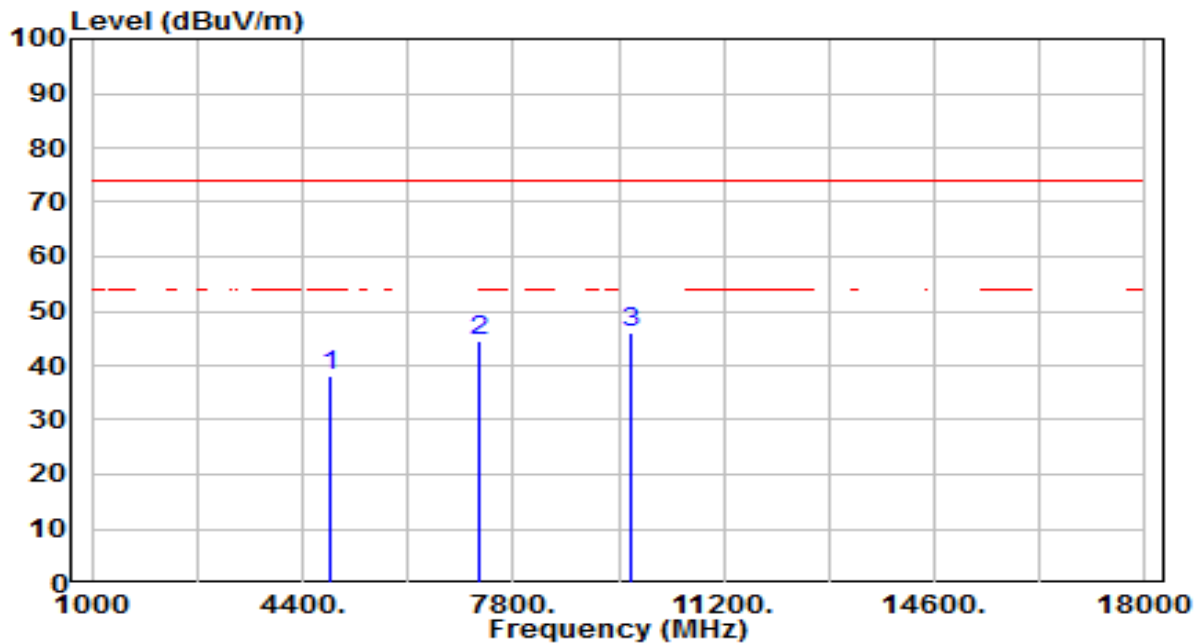


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.81	4.39	38.21	-35.79	74.00	100	344	Peak
2	7266.000	31.77	12.89	44.66	-29.34	74.00	100	298	Peak
3	* 9688.000	29.37	16.78	46.15	-27.85	74.00	100	298	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

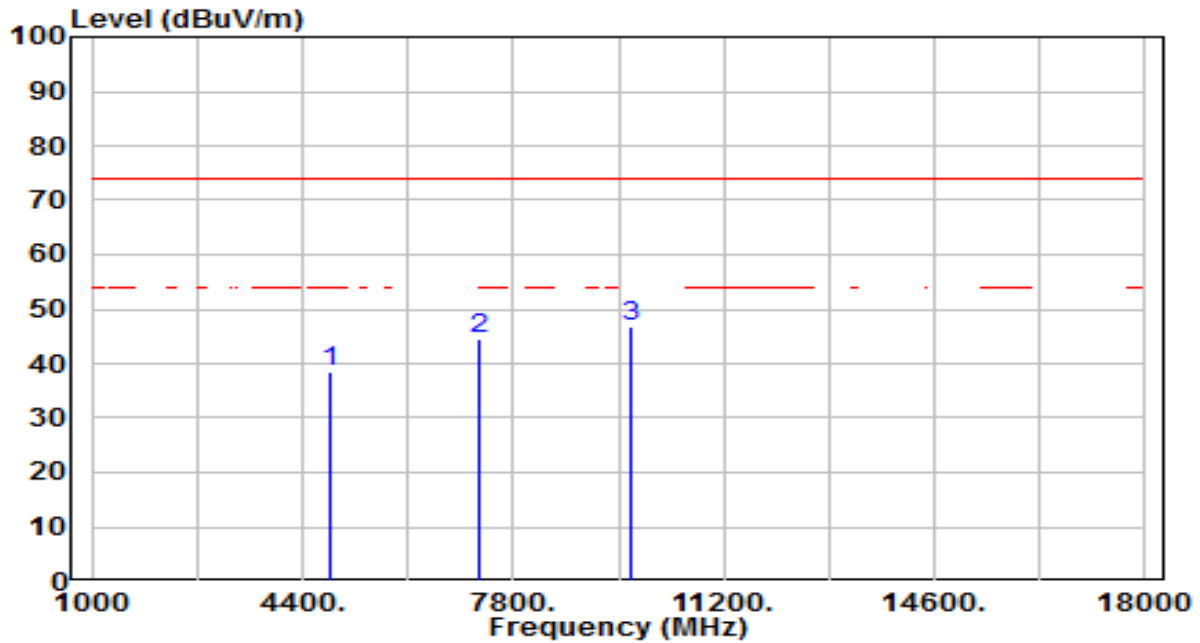


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.92	4.39	38.31	-35.69	74.00	100	317	Peak
2	7266.000	31.47	12.89	44.37	-29.63	74.00	100	118	Peak
3	* 9688.000	30.01	16.78	46.80	-27.20	74.00	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

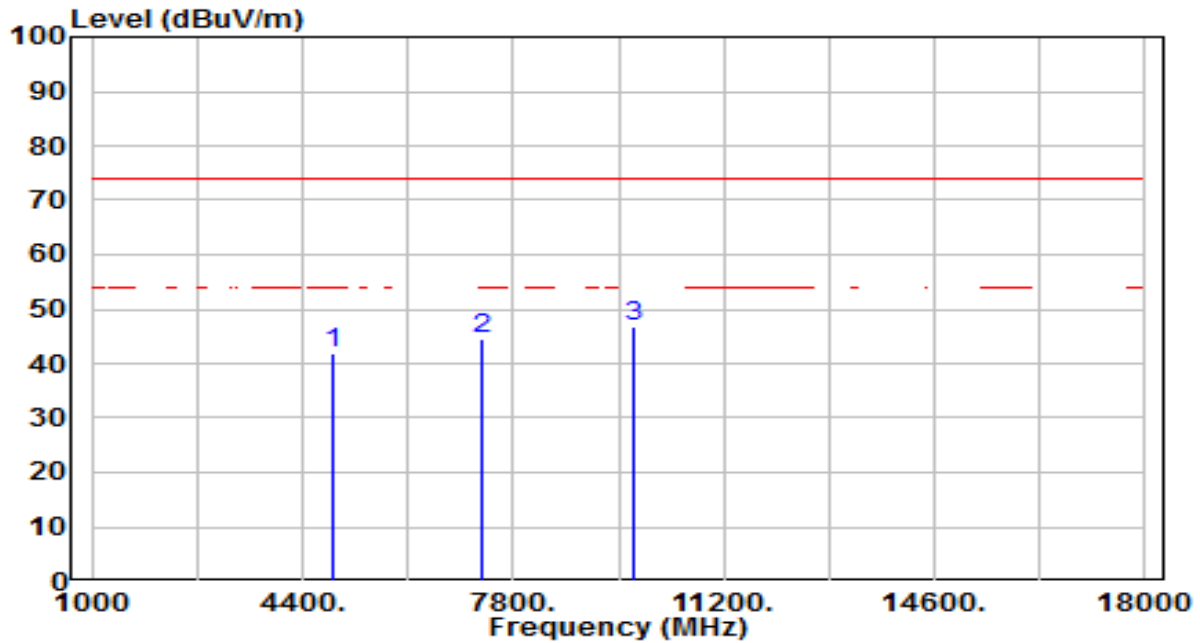


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.47	4.46	41.93	-32.07	74.00	100	355	Peak
2	7311.000	31.38	13.13	44.51	-29.49	74.00	100	122	Peak
3	* 9748.000	29.75	16.92	46.66	-27.34	74.00	100	251	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

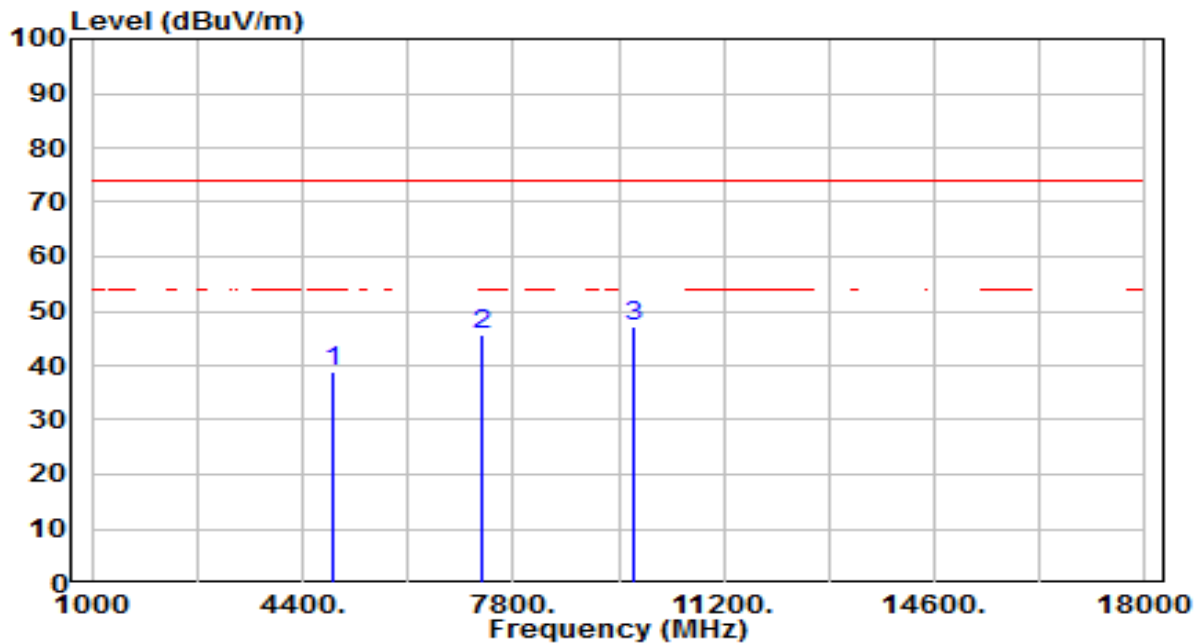


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	34.31	4.46	38.77	-35.23	74.00	100	307	Peak
2	7311.000	32.36	13.13	45.48	-28.52	74.00	100	328	Peak
3	* 9748.000	30.24	16.92	47.16	-26.84	74.00	100	42	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

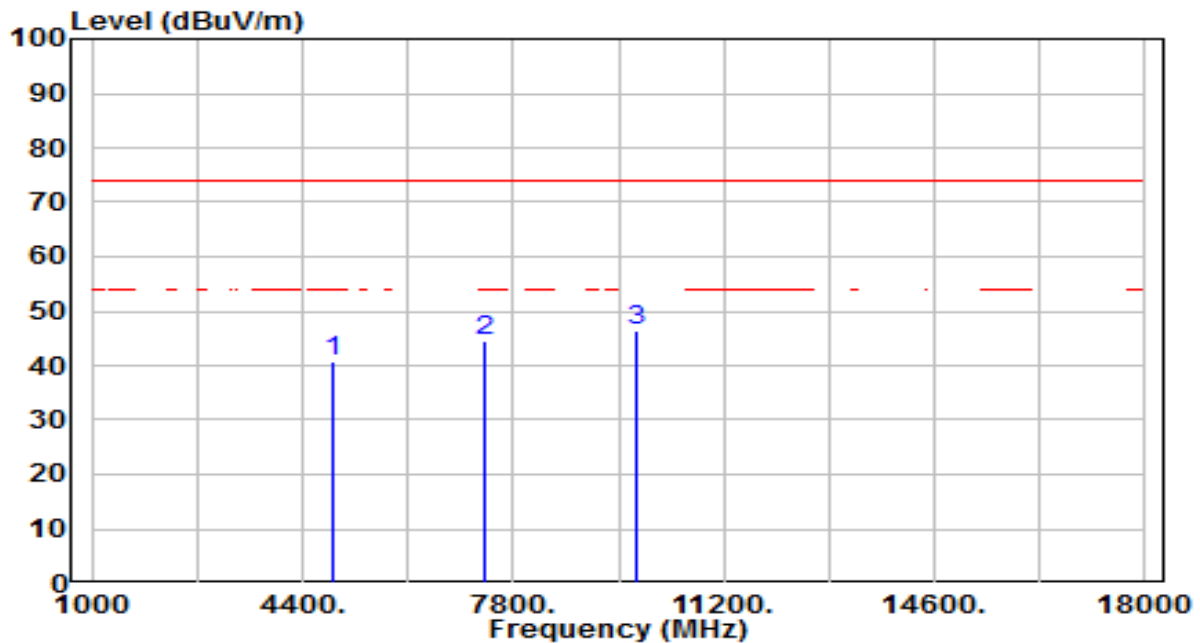


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	36.21	4.54	40.75	-33.25	74.00	100	346	Peak
2	7356.000	31.19	13.35	44.54	-29.46	74.00	100	324	Peak
3	* 9808.000	29.47	17.06	46.53	-27.47	74.00	100	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

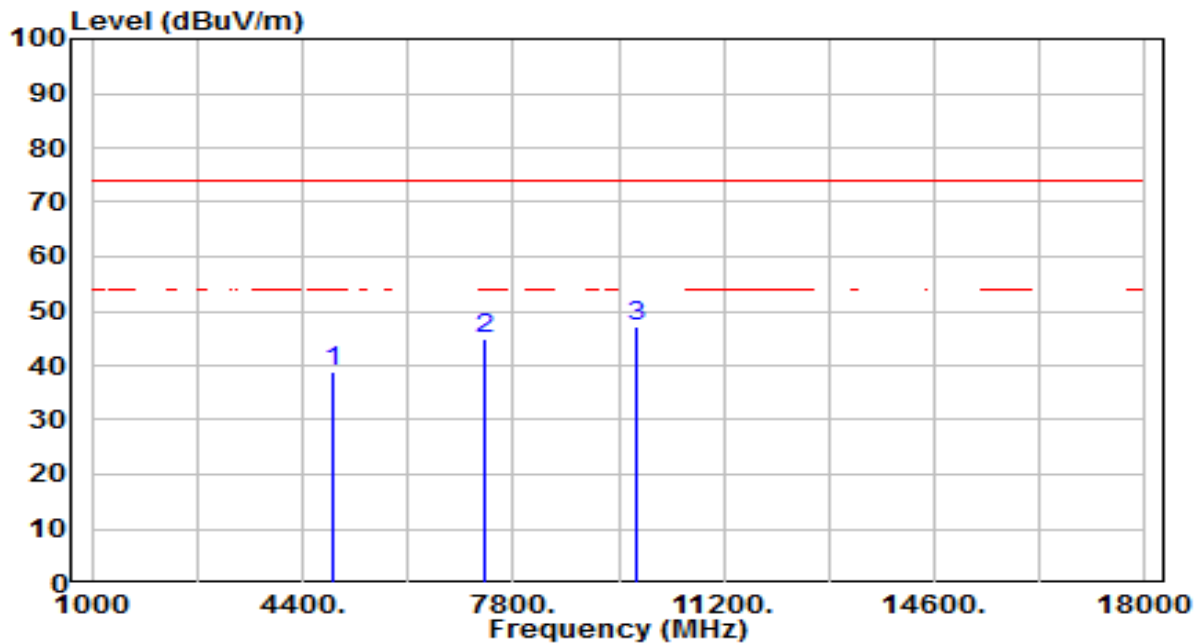


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	34.25	4.54	38.79	-35.21	74.00	100	57	Peak
2	7356.000	31.72	13.35	45.07	-28.93	74.00	100	202	Peak
3	* 9808.000	30.28	17.06	47.34	-26.66	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

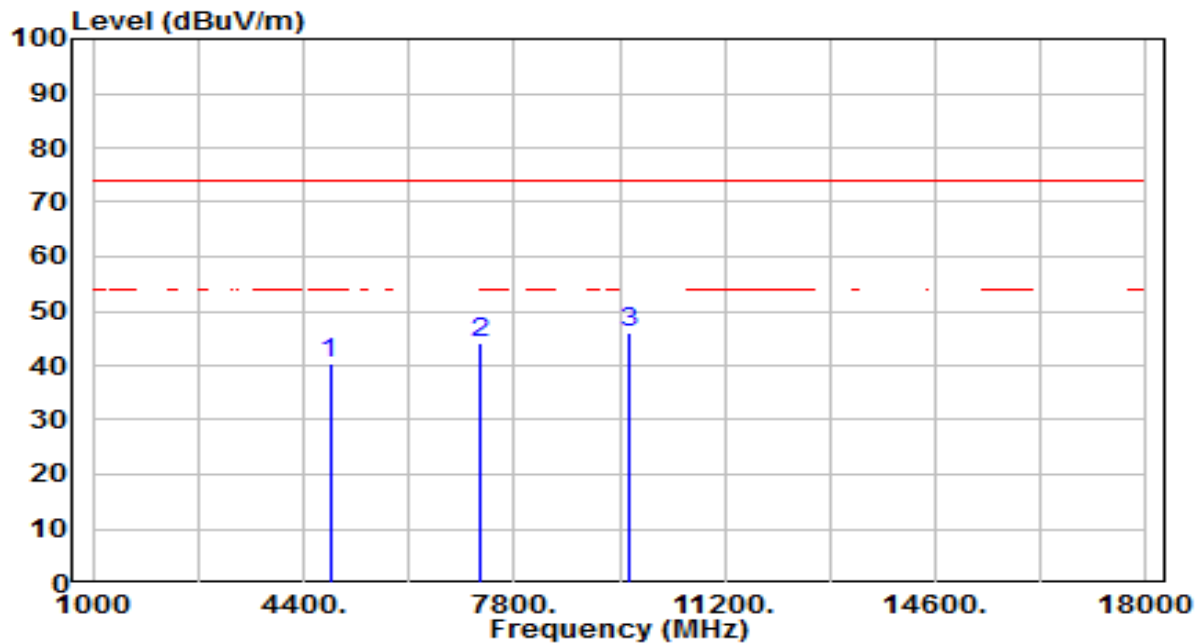


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.95	4.34	40.29	-33.71	74.00	100	3	Peak
2	7236.000	31.35	12.73	44.08	-29.92	74.00	100	257	Peak
3	* 9648.000	29.40	16.74	46.14	-27.86	74.00	100	309	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

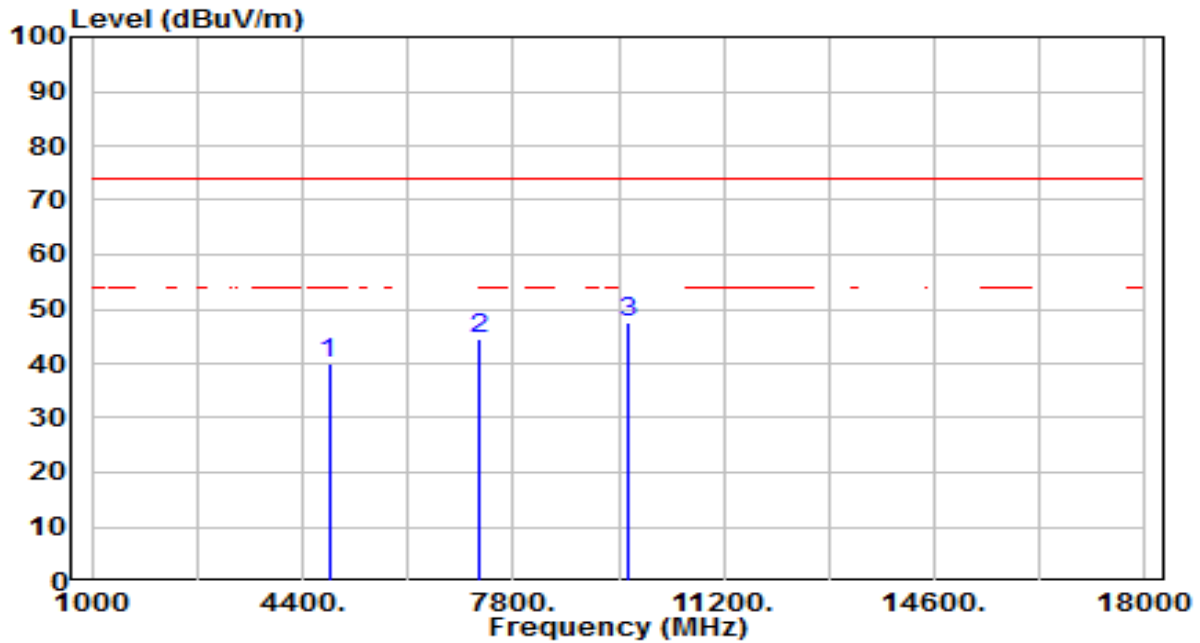


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	35.55	4.34	39.89	-34.11	74.00	100	56	Peak
2	7236.000	31.70	12.73	44.43	-29.57	74.00	100	337	Peak
3	* 9648.000	30.73	16.74	47.47	-26.53	74.00	100	279	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

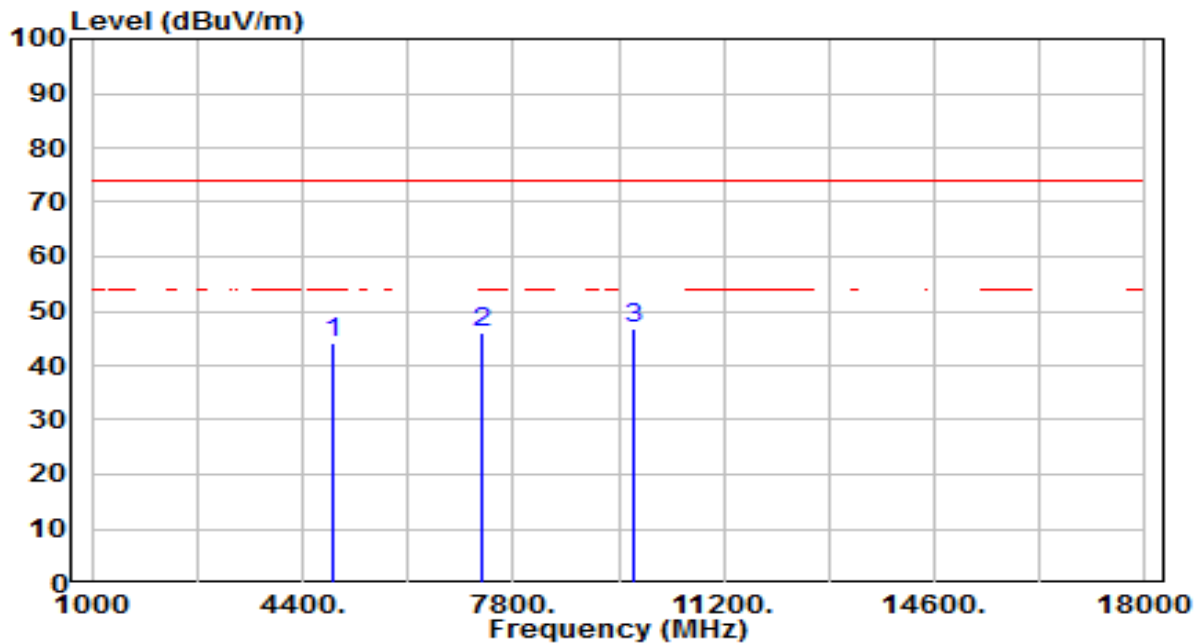


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	39.51	4.46	43.97	-30.03	74.00	100	355	Peak
2	7311.000	32.75	13.13	45.88	-28.12	74.00	100	189	Peak
3	* 9748.000	29.76	16.92	46.68	-27.32	74.00	100	7	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

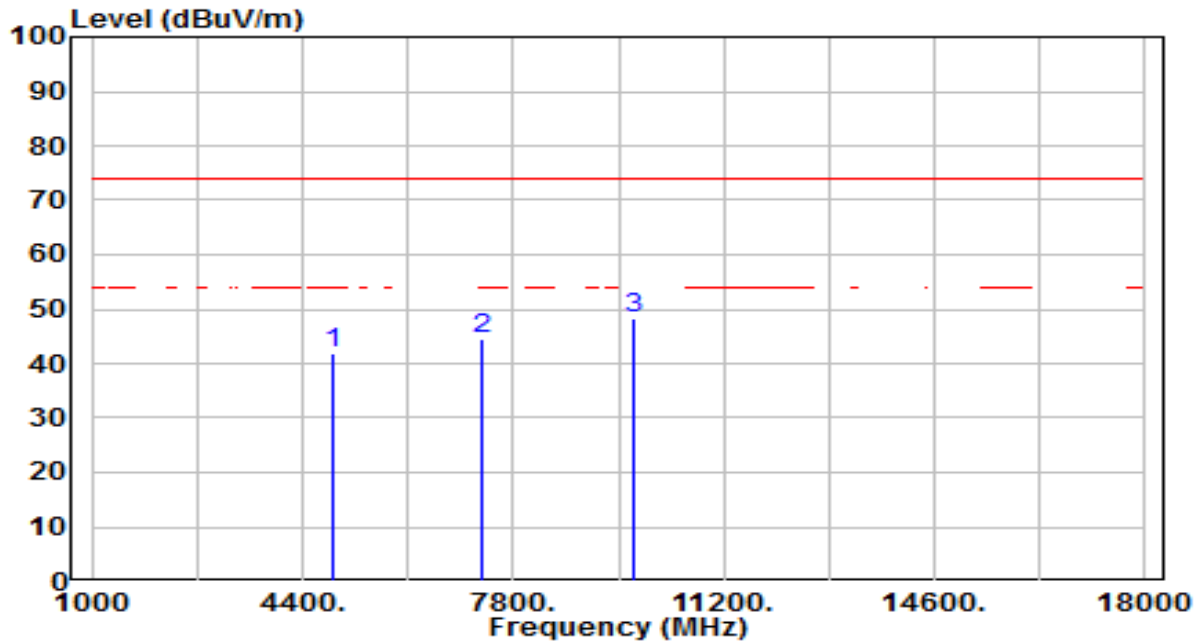


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	37.44	4.46	41.90	-32.10	74.00	100	89	Peak
2	7311.000	31.46	13.13	44.59	-29.41	74.00	100	291	Peak
3	* 9748.000	31.27	16.92	48.19	-25.81	74.00	100	312	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

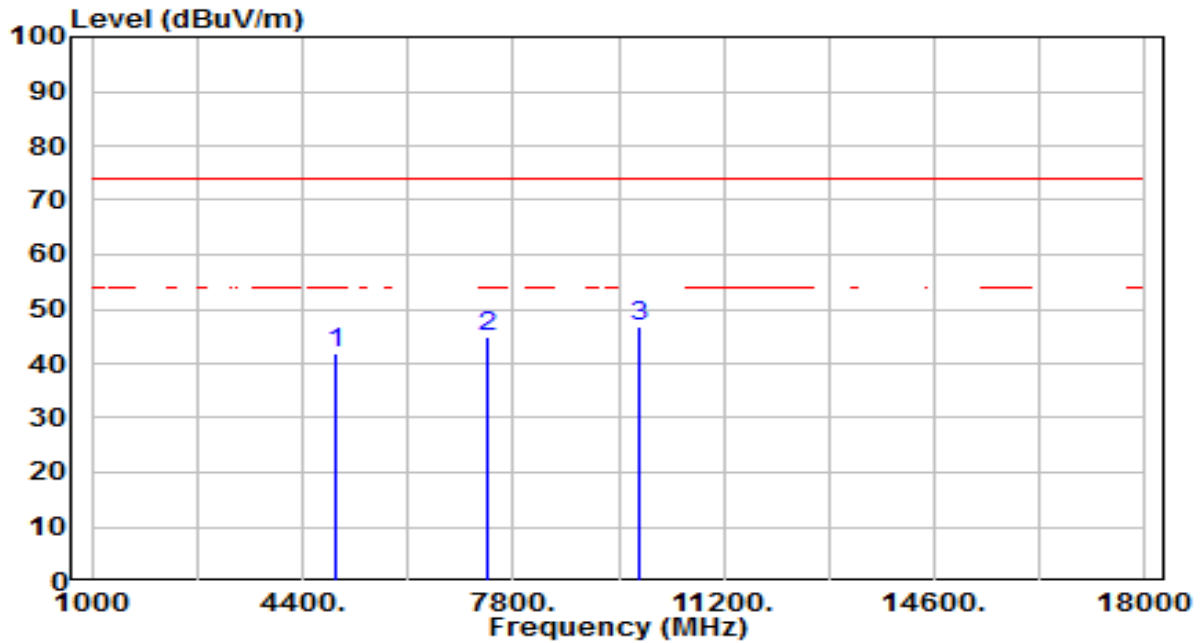


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	37.16	4.61	41.77	-32.23	74.00	100	344	Peak
2	7386.000	31.44	13.49	44.94	-29.06	74.00	100	282	Peak
3	* 9848.000	29.83	17.14	46.97	-27.03	74.00	100	318	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

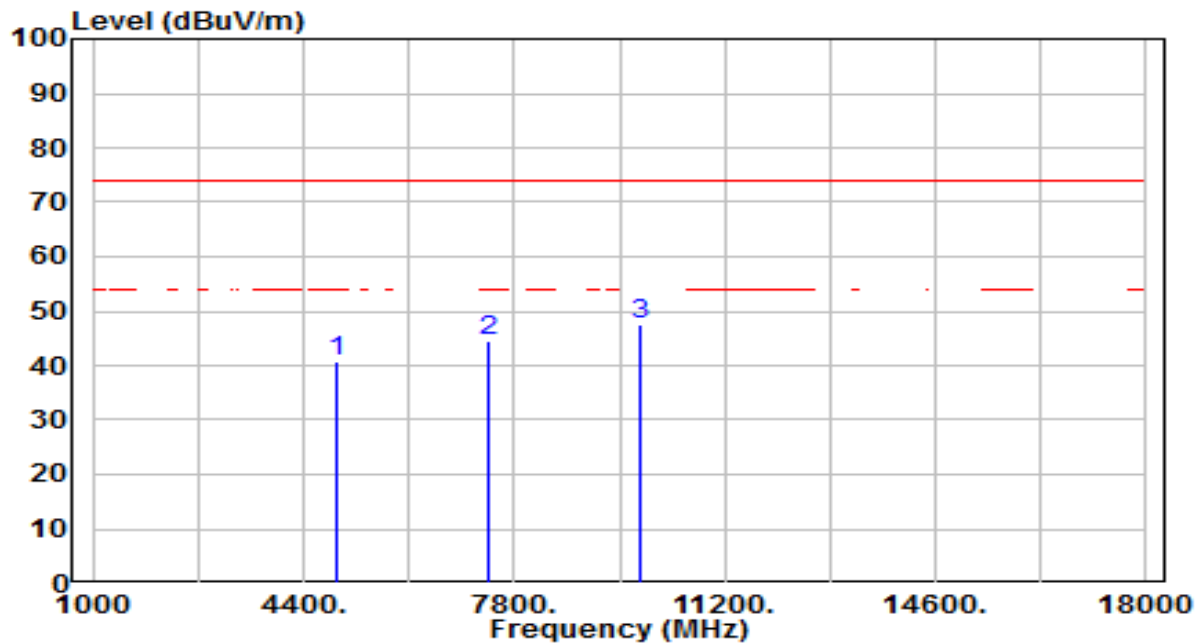


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4924.000	36.18	4.61	40.80	-33.20	74.00	100	317	Peak
2	7386.000	30.90	13.49	44.39	-29.61	74.00	100	119	Peak
3	* 9848.000	30.53	17.14	47.67	-26.33	74.00	100	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

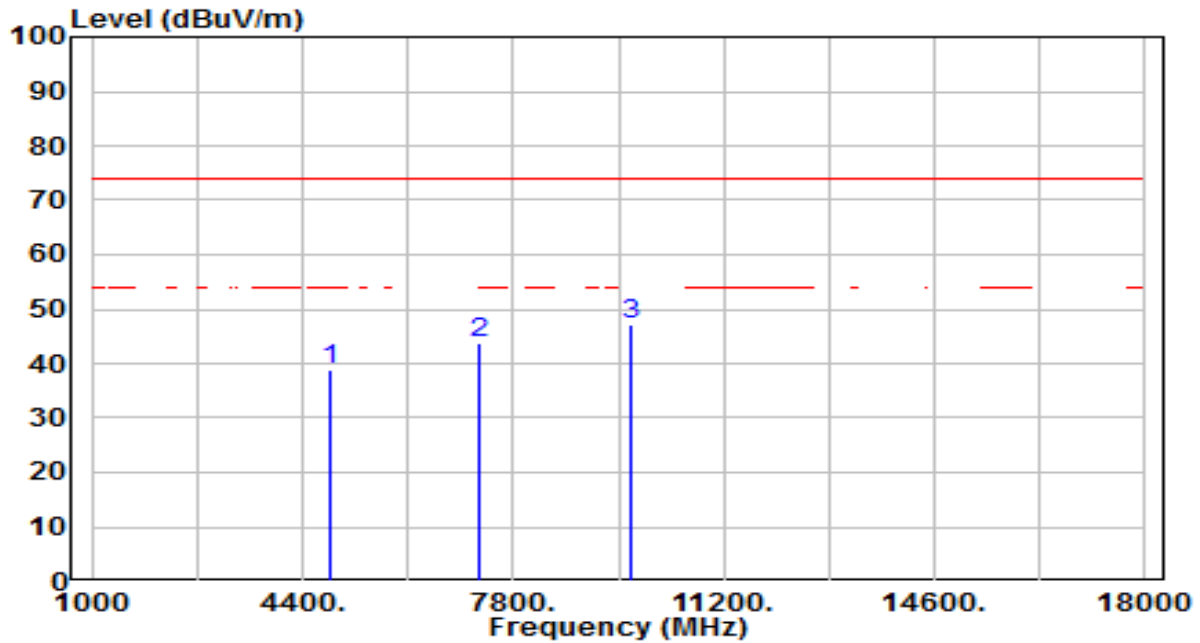


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	34.44	4.39	38.83	-35.17	74.00	100	116	Peak
2	7266.000	30.97	12.89	43.86	-30.14	74.00	100	314	Peak
3	* 9688.000	30.57	16.78	47.35	-26.65	74.00	100	121	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

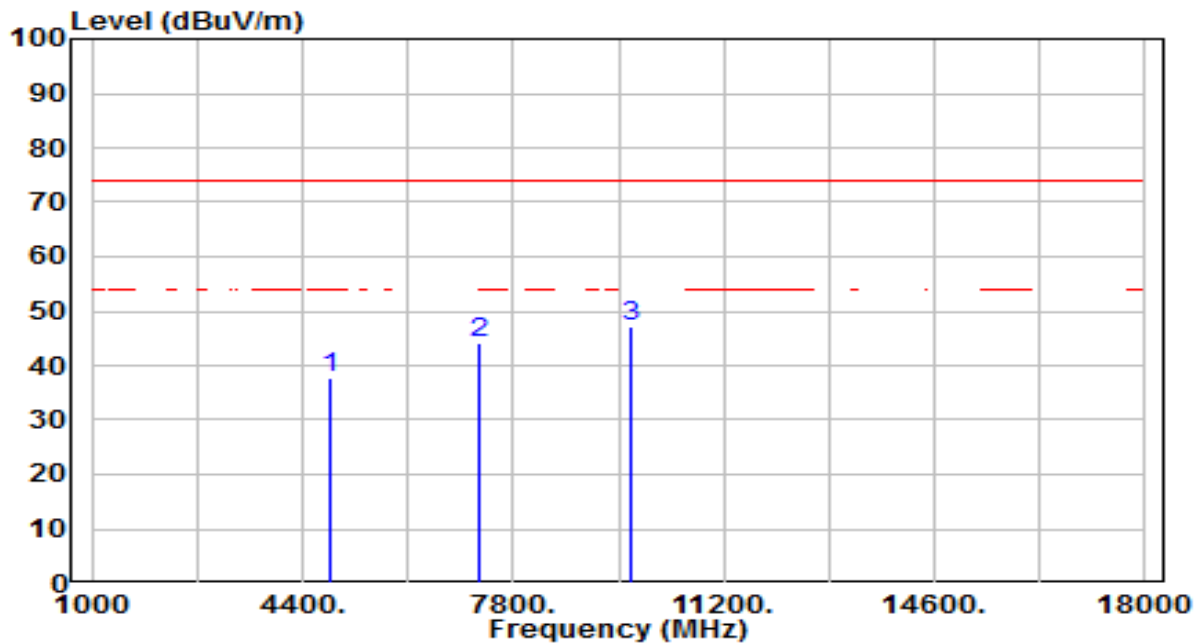


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	33.38	4.39	37.77	-36.23	74.00	100	141	Peak
2	7266.000	31.09	12.89	43.98	-30.02	74.00	100	130	Peak
3	* 9688.000	30.28	16.78	47.07	-26.93	74.00	100	187	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

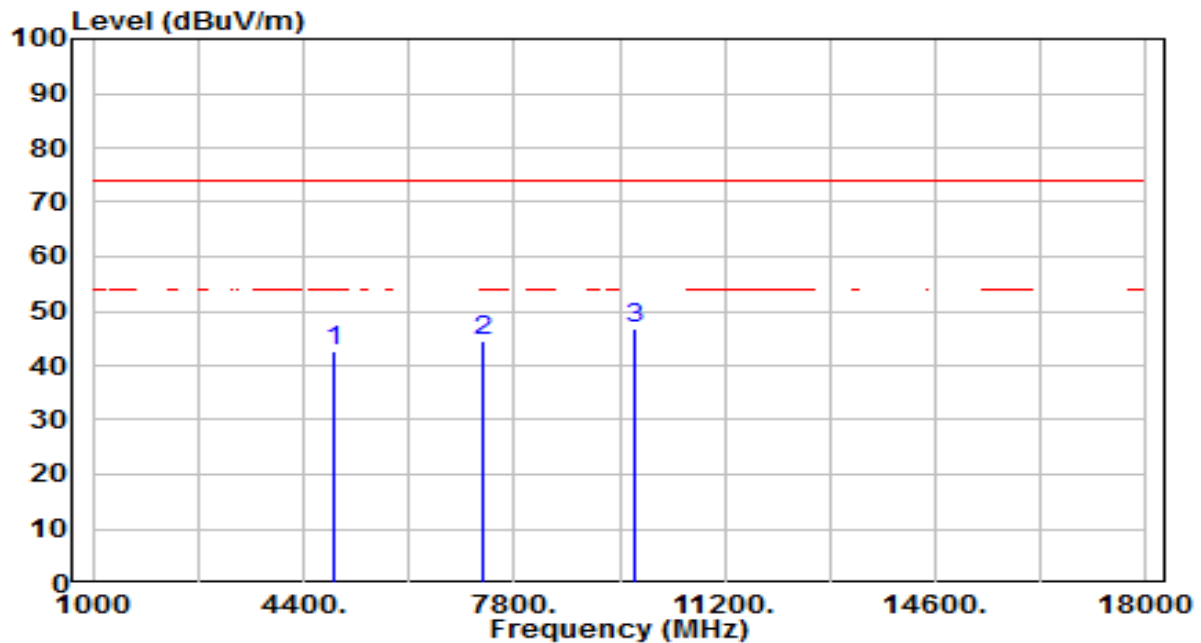


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	38.08	4.46	42.54	-31.46	74.00	100	359	Peak
2	7311.000	31.47	13.13	44.60	-29.40	74.00	100	75	Peak
3	* 9748.000	29.91	16.92	46.83	-27.17	74.00	100	339	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

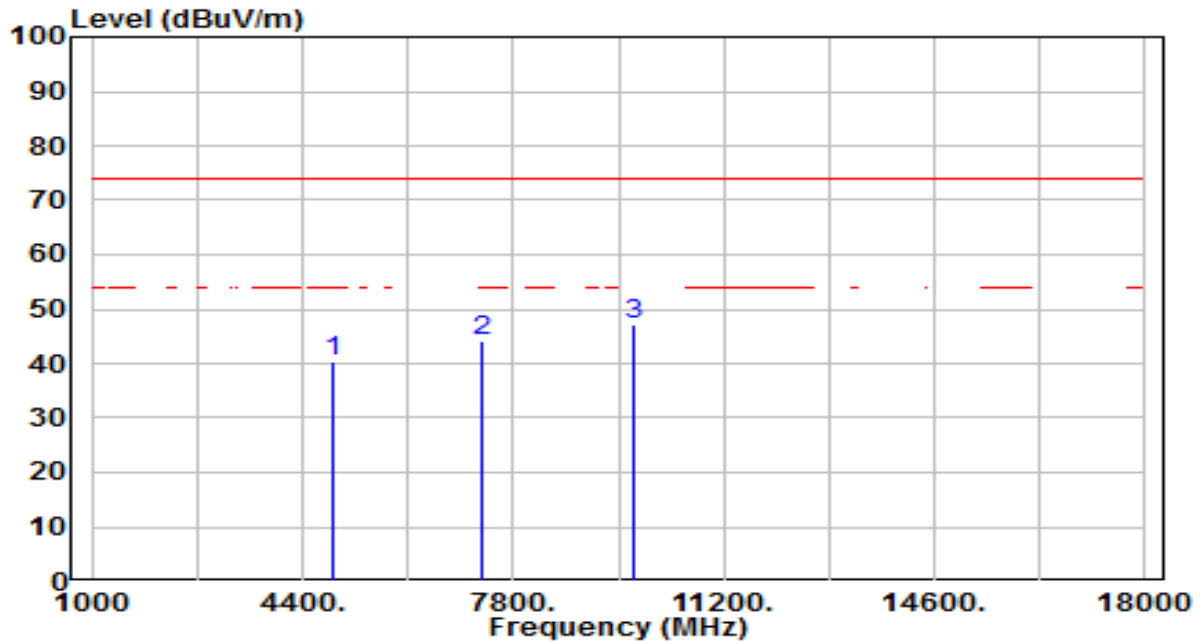


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4874.000	35.86	4.46	40.33	-33.67	74.00	100	88	Peak
2	7311.000	30.91	13.13	44.04	-29.96	74.00	100	135	Peak
3	* 9748.000	30.21	16.92	47.13	-26.87	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

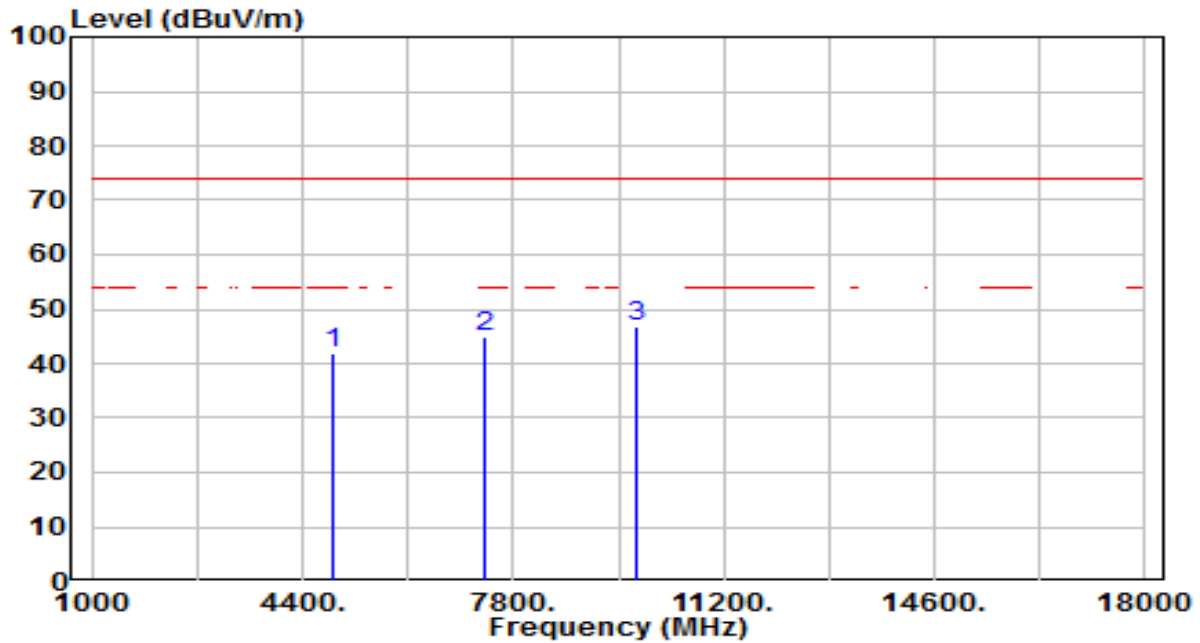


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	37.30	4.54	41.83	-32.17	74.00	100	355	Peak
2	7356.000	31.68	13.35	45.03	-28.97	74.00	100	111	Peak
3	* 9808.000	29.70	17.06	46.77	-27.23	74.00	100	69	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

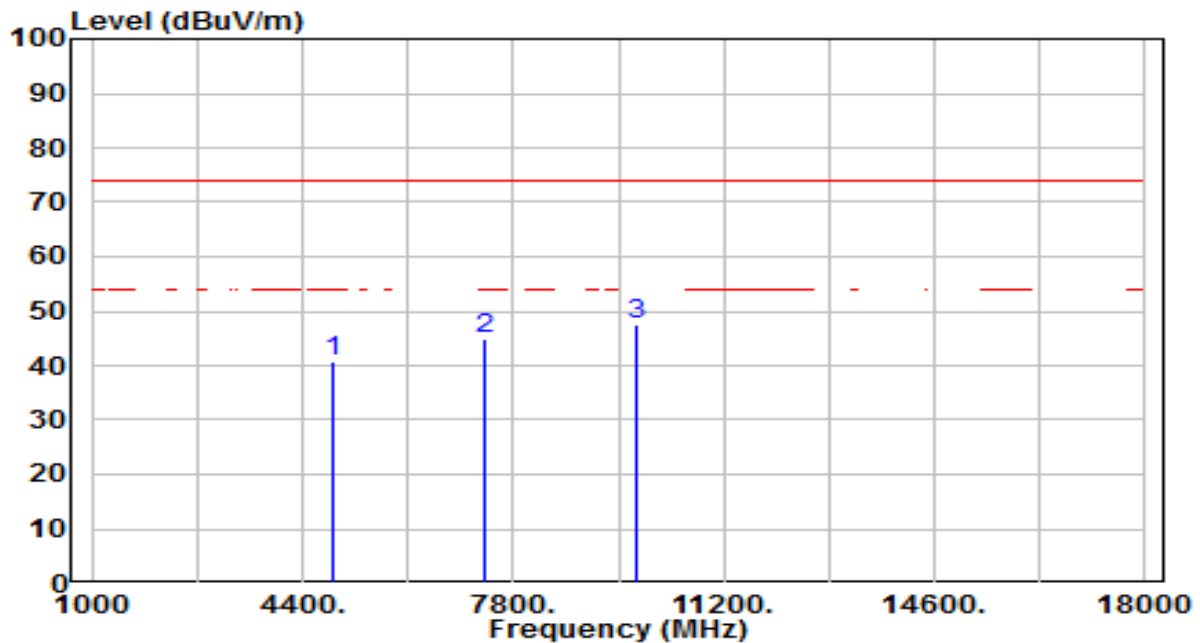


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	36.31	4.54	40.85	-33.15	74.00	100	36	Peak
2	7356.000	31.66	13.35	45.00	-29.00	74.00	100	21	Peak
3	* 9808.000	30.54	17.06	47.61	-26.39	74.00	100	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-10
Factor	BBHA 9170	Temp. / Humidity	25°C /64%
Polarity	Horizontal	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

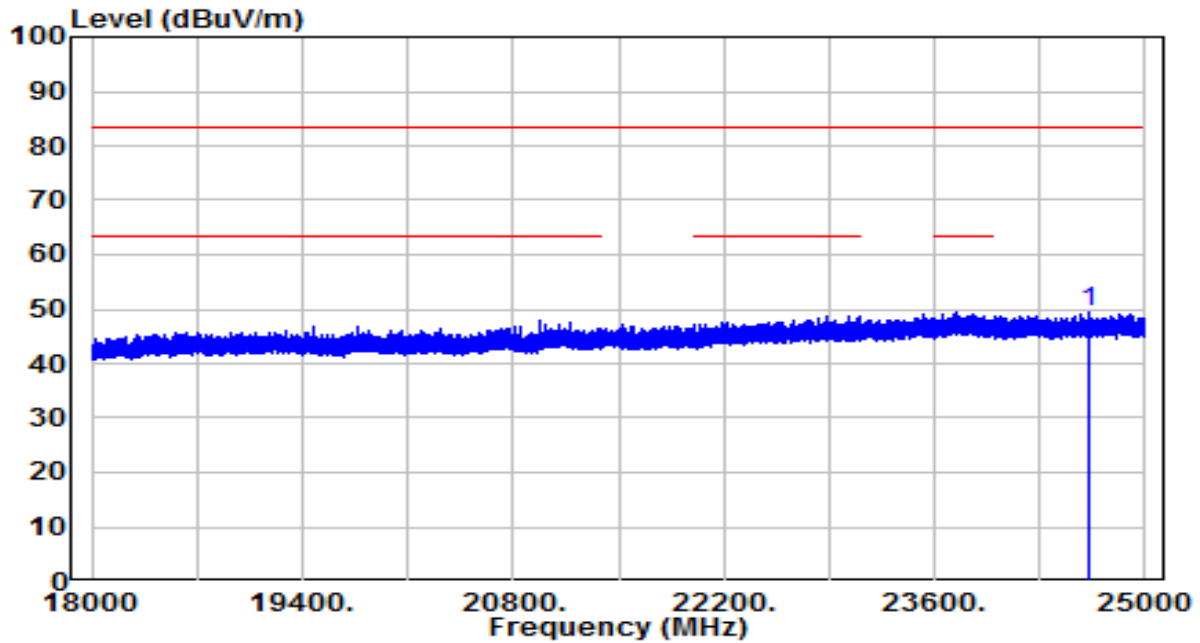


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	24622.660	36.45	12.86	49.31	-34.19	83.50	150	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-10
Factor	BBHA 9170	Temp. / Humidity	25°C /64%
Polarity	Vertical	Site / Test Engineer	AC1 / Tim
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

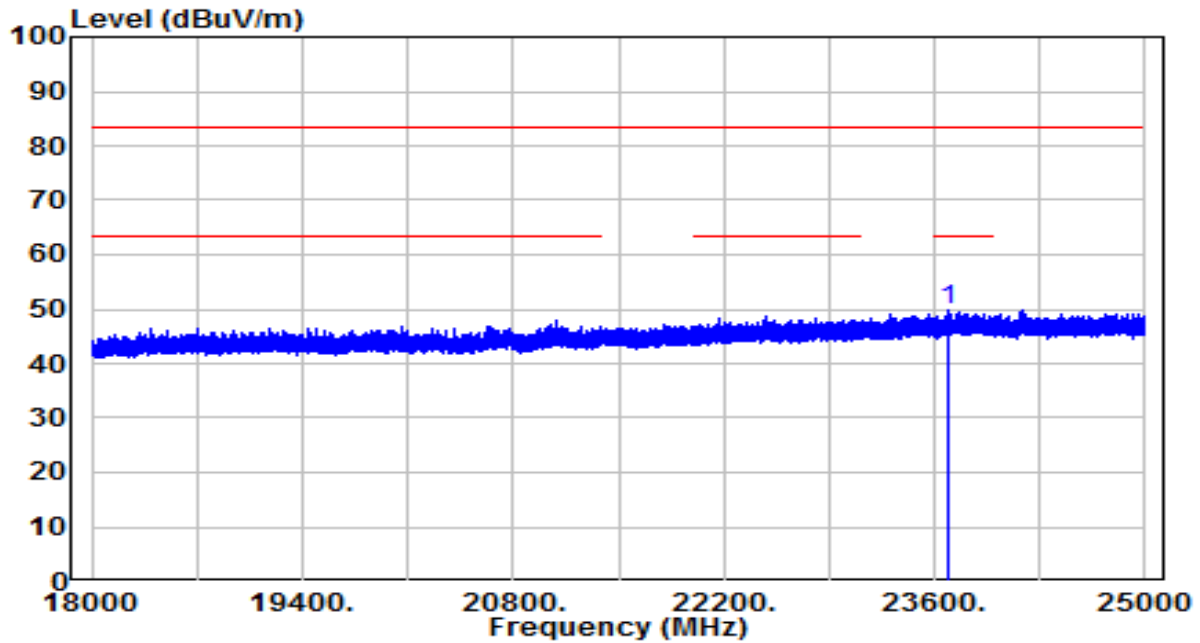

No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	23687.720	37.29	12.59	49.89	-33.61	83.50	150	147	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.7.3. Test Setting

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.


If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

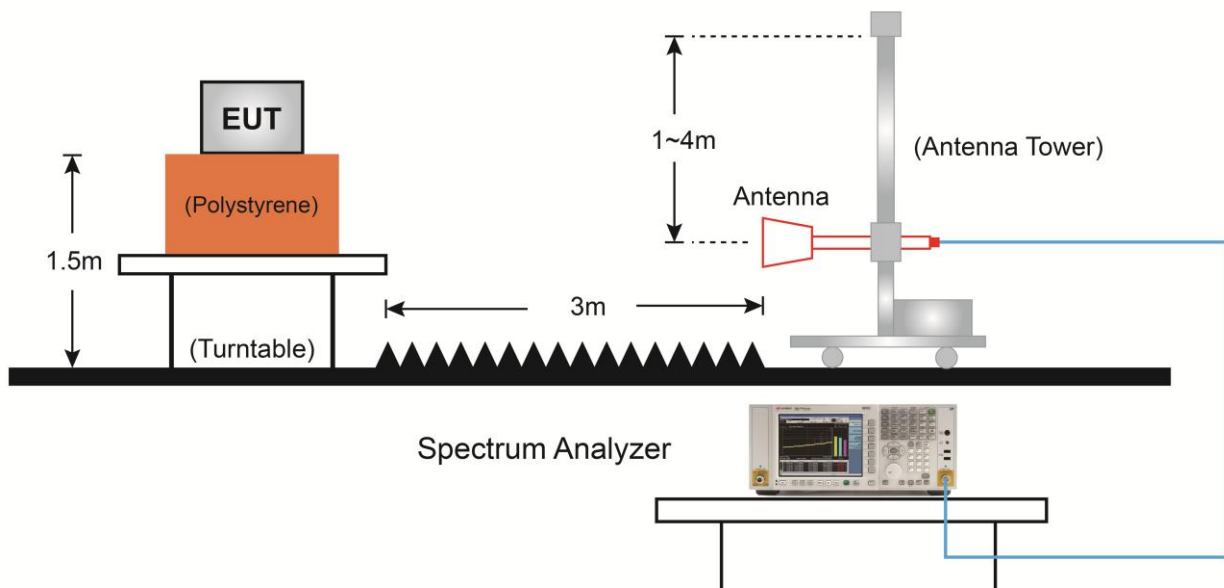7.7.4.Test Setup

7.7.5.Test Result

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

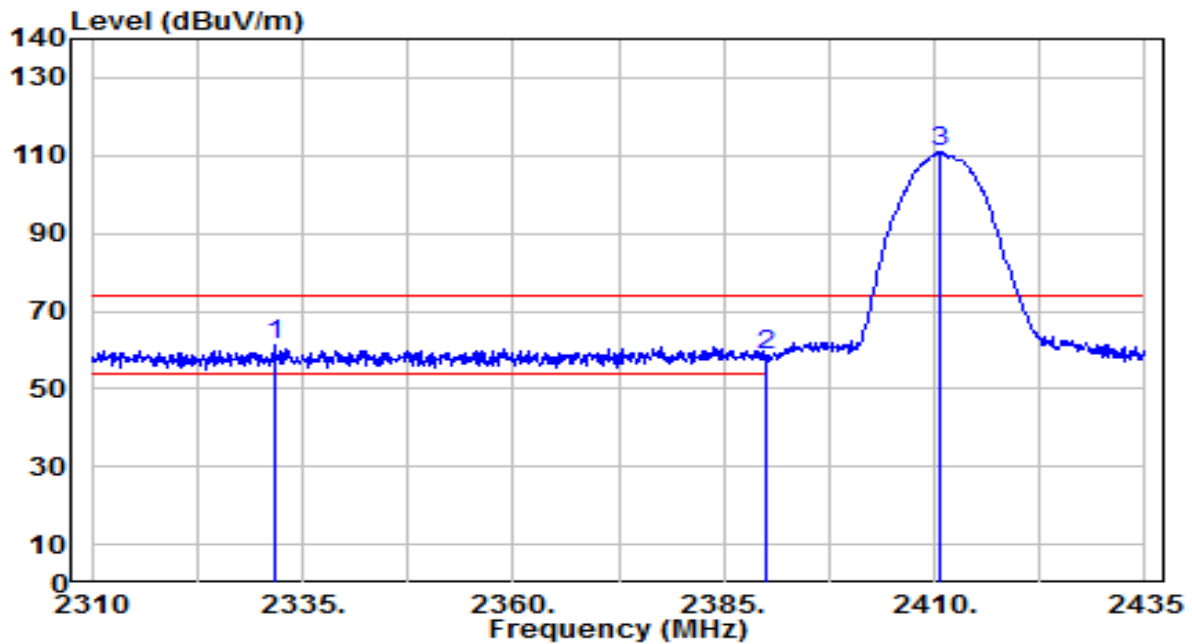


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2331.625	28.77	32.50	61.26	-12.74	74.00	145	330	Peak
2		2390.000	26.08	32.73	58.80	-15.20	74.00	145	330	Peak
3		2410.750	78.02	32.81	110.83	N/A	N/A	145	330	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

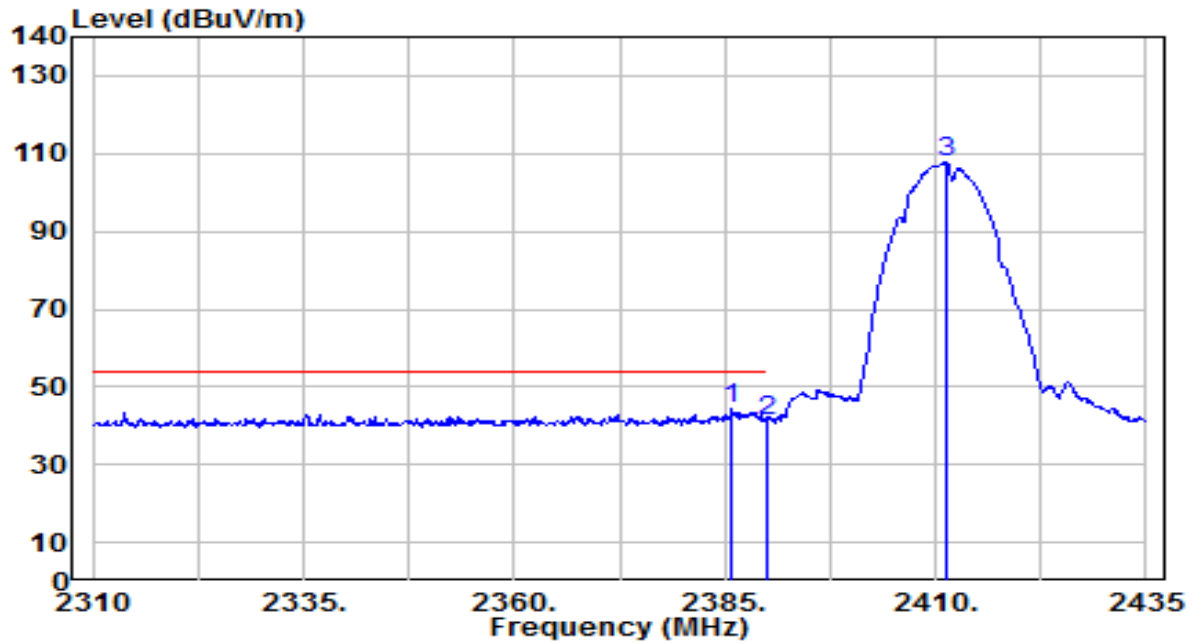


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.750	11.42	32.71	44.13	-9.87	54.00	145	330	Average
2		2390.000	8.68	32.73	41.41	-12.59	54.00	145	330	Average
3		2411.250	74.85	32.81	107.66	N/A	N/A	145	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

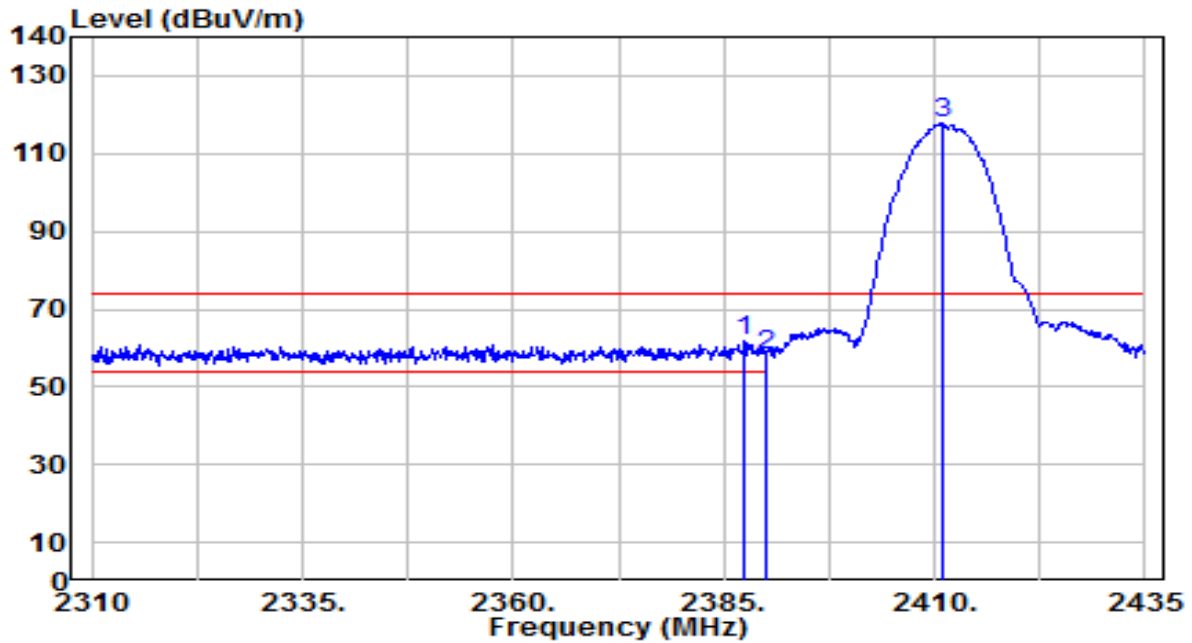


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	29.08	32.72	61.79	-12.21	74.00	170	80	Peak
2		2390.000	25.62	32.73	58.34	-15.66	74.00	170	80	Peak
3		2410.875	84.79	32.81	117.60	N/A	N/A	170	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

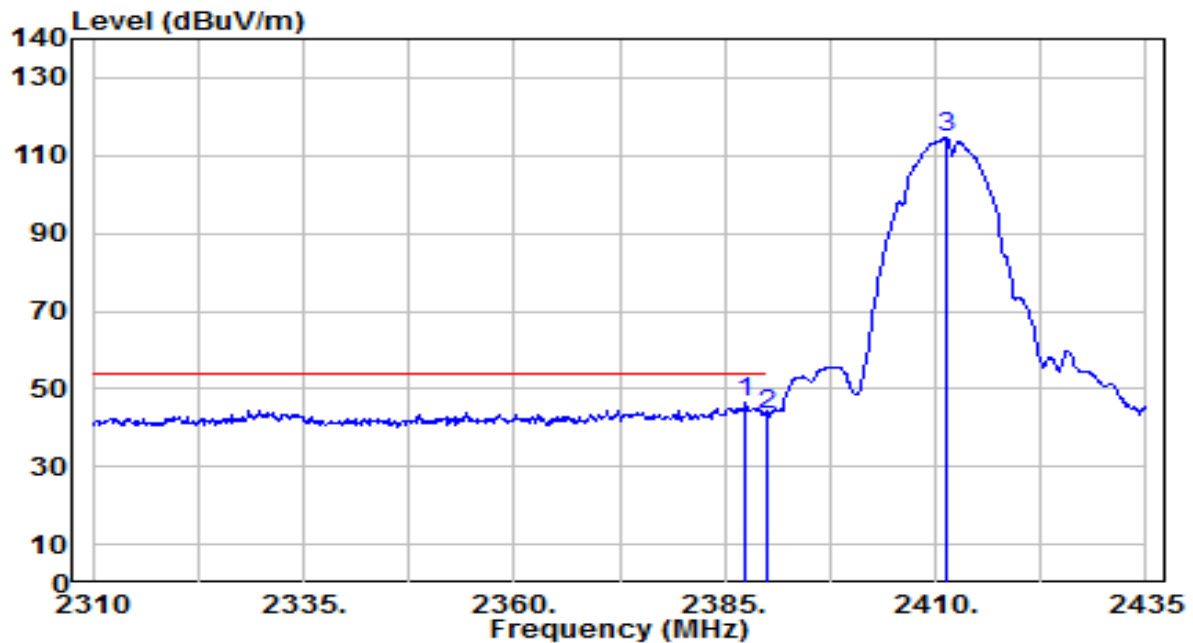


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.500	13.55	32.72	46.27	-7.73	54.00	170	80	Average
2		2390.000	10.61	32.73	43.33	-10.67	54.00	170	80	Average
3		2411.250	81.75	32.81	114.56	N/A	N/A	170	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

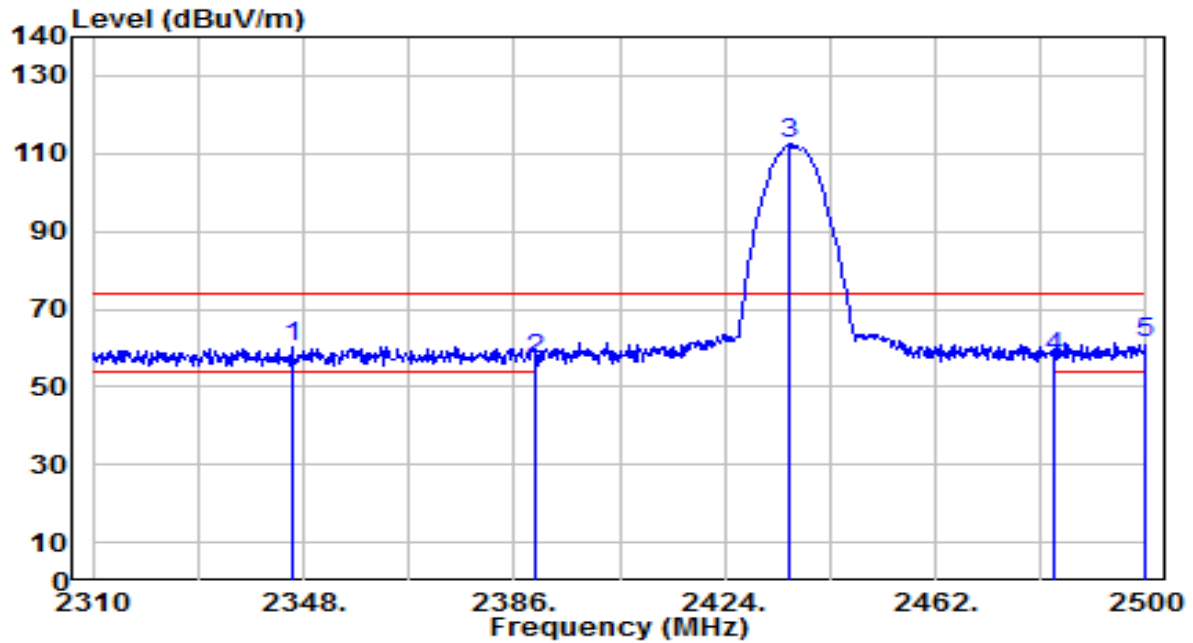


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2345.910	27.75	32.55	60.30	-13.70	74.00	285	115	Peak
2	2390.000	24.50	32.73	57.23	-16.77	74.00	285	115	Peak
3	2435.780	79.50	32.91	112.41	N/A	N/A	285	115	Peak
4	2483.500	24.66	33.09	57.76	-16.24	74.00	285	115	Peak
5	* 2500.000	28.37	33.16	61.53	-12.47	74.00	285	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

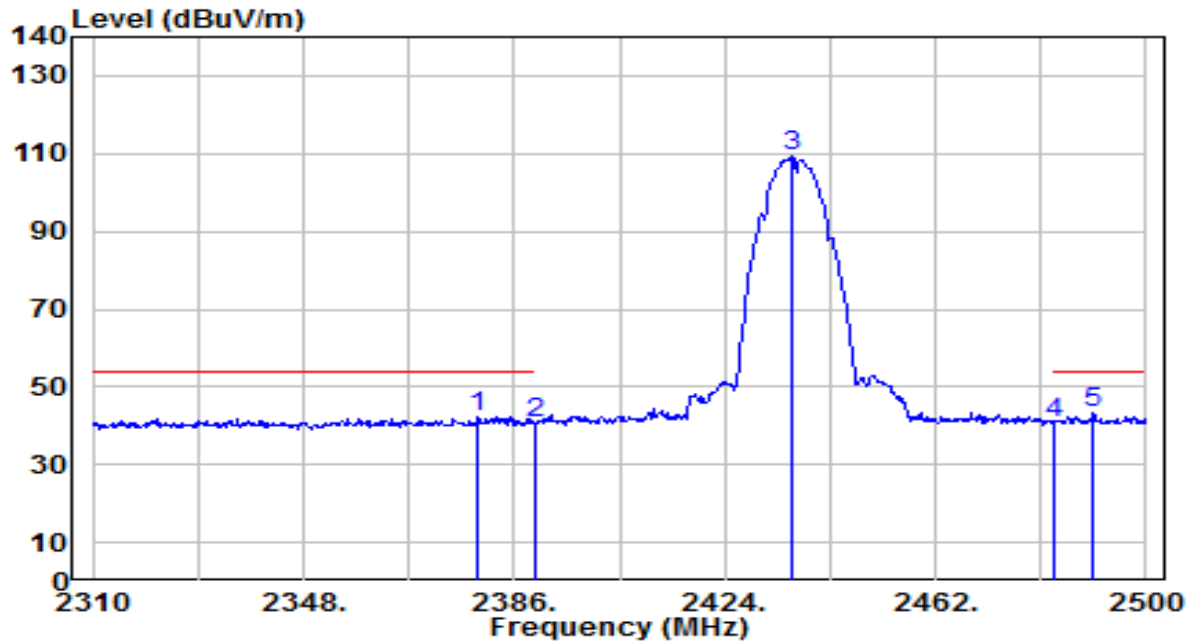


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2379.540	9.62	32.69	42.31	-11.69	54.00	285	115	Average
2	2390.000	7.75	32.73	40.48	-13.52	54.00	285	115	Average
3	2436.160	76.41	32.91	109.31	N/A	N/A	285	115	Average
4	2483.500	7.65	33.09	40.75	-13.25	54.00	285	115	Average
5	* 2490.500	10.25	33.12	43.37	-10.63	54.00	285	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

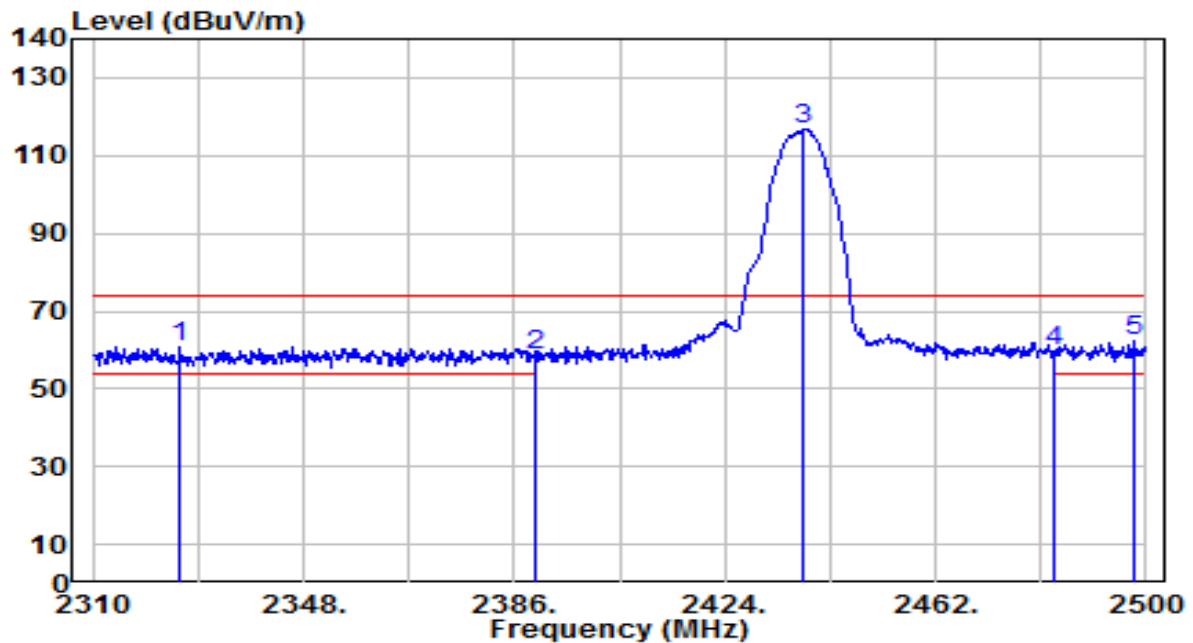


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2325.770	28.43	32.47	60.90	-13.10	74.00	210	65	Peak
2	2390.000	25.70	32.73	58.43	-15.57	74.00	210	65	Peak
3	2438.250	84.10	32.92	117.02	N/A	N/A	210	65	Peak
4	2483.500	26.66	33.09	59.76	-14.24	74.00	210	65	Peak
5	* 2497.910	29.22	33.15	62.37	-11.63	74.00	210	65	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

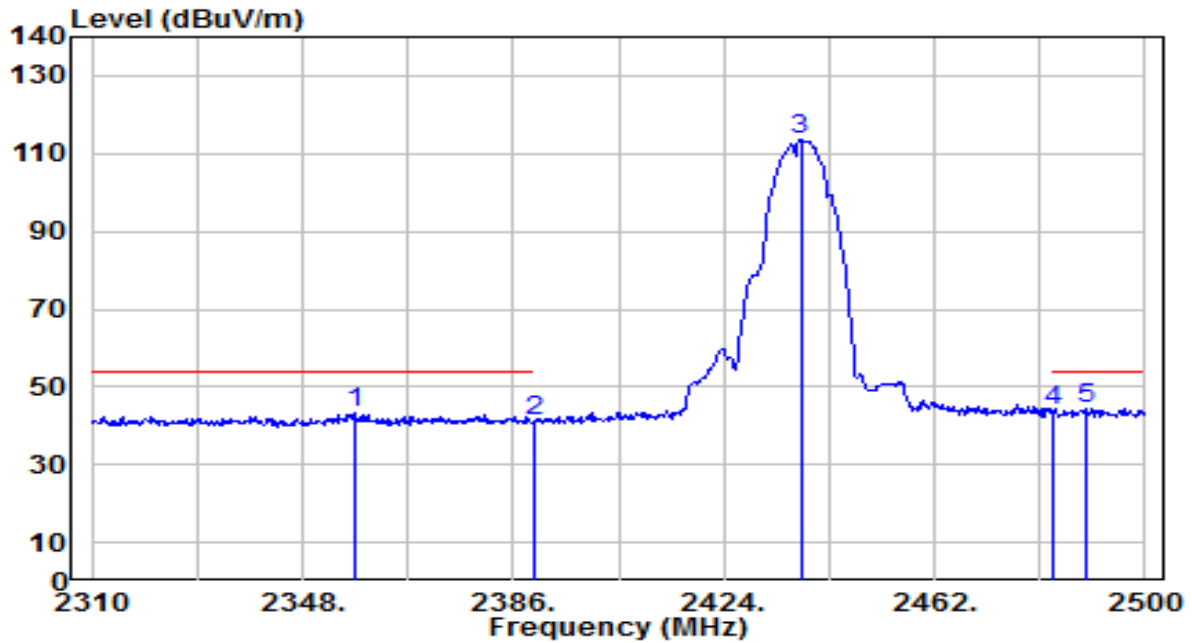


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2357.690	10.60	32.60	43.20	-10.80	54.00	210	65	Average
2	2390.000	8.53	32.73	41.26	-12.74	54.00	210	65	Average
3	2437.870	80.66	32.92	113.57	N/A	N/A	210	65	Average
4	2483.500	10.76	33.09	43.85	-10.15	54.00	210	65	Average
5	* 2489.550	11.15	33.12	44.27	-9.73	54.00	210	65	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

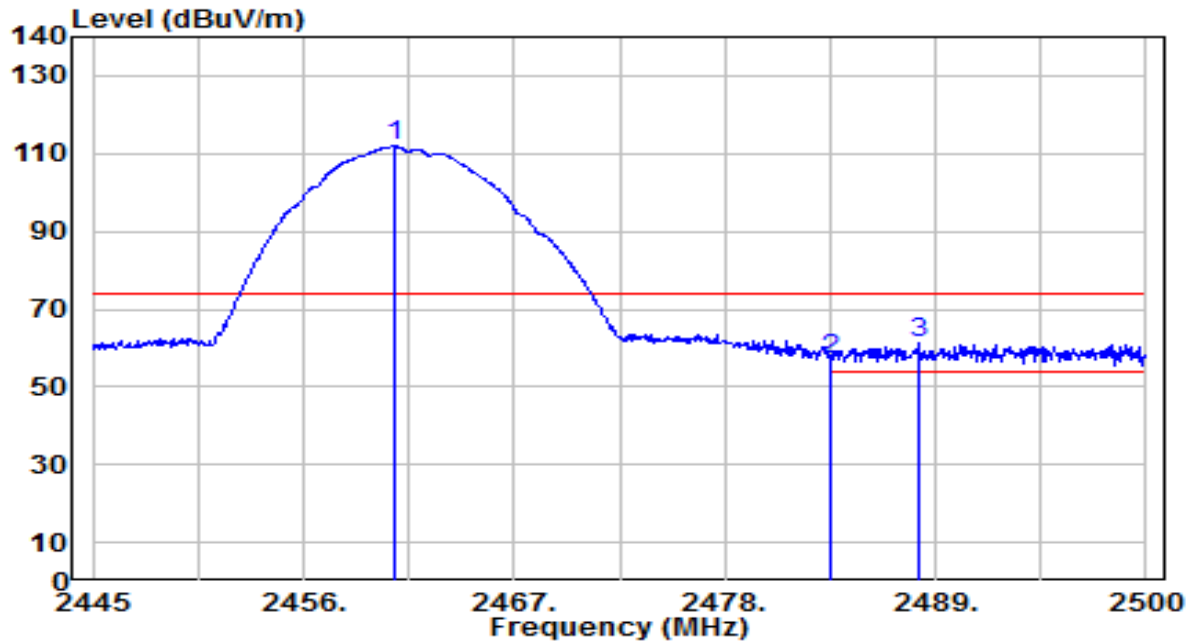


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.785	78.78	33.01	111.79	N/A	N/A	245	115	Peak
2	2483.500	23.82	33.09	56.92	-17.08	74.00	245	115	Peak
3	* 2488.120	28.07	33.11	61.18	-12.82	74.00	245	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

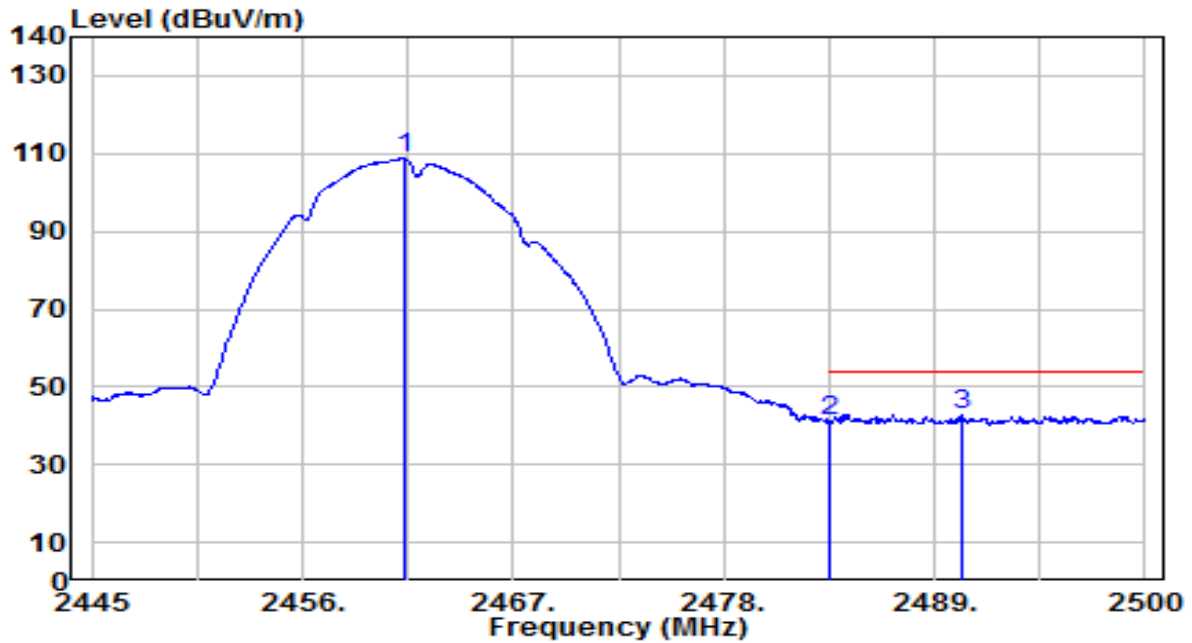


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.280	75.65	33.01	108.66	N/A	N/A	245	115	Average
2	2483.500	8.08	33.09	41.18	-12.82	54.00	245	115	Average
3	* 2490.430	9.88	33.12	43.00	-11.00	54.00	245	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

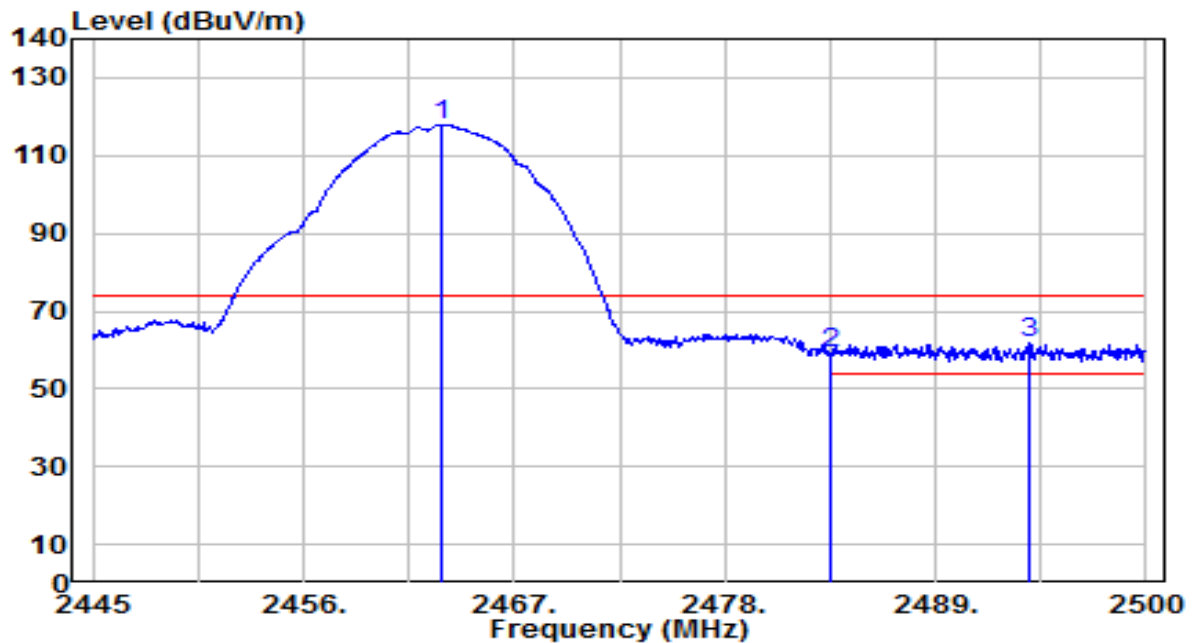


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.150	84.88	33.01	117.90	N/A	N/A	165	70	Peak
2	2483.500	25.94	33.09	59.03	-14.97	74.00	165	70	Peak
3	* 2493.840	28.43	33.14	61.56	-12.44	74.00	165	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11b_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

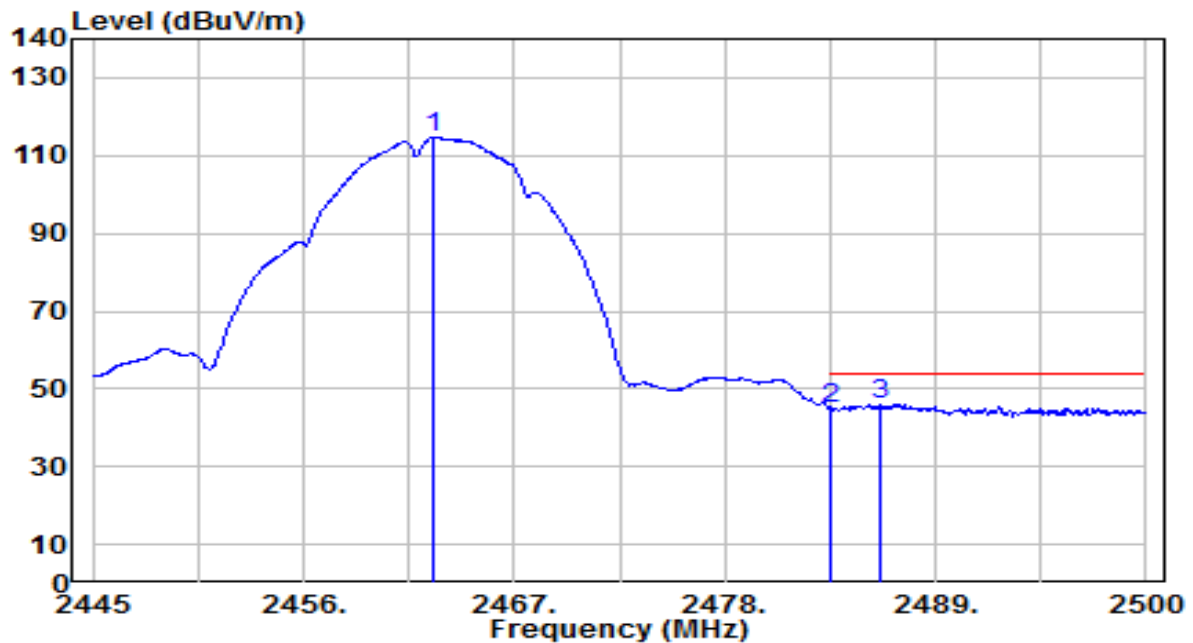


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.710	81.56	33.01	114.57	N/A	N/A	165	70	Average
2	2483.500	11.97	33.09	45.06	-8.94	54.00	165	70	Average
3	* 2486.140	12.86	33.11	45.96	-8.04	54.00	165	70	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

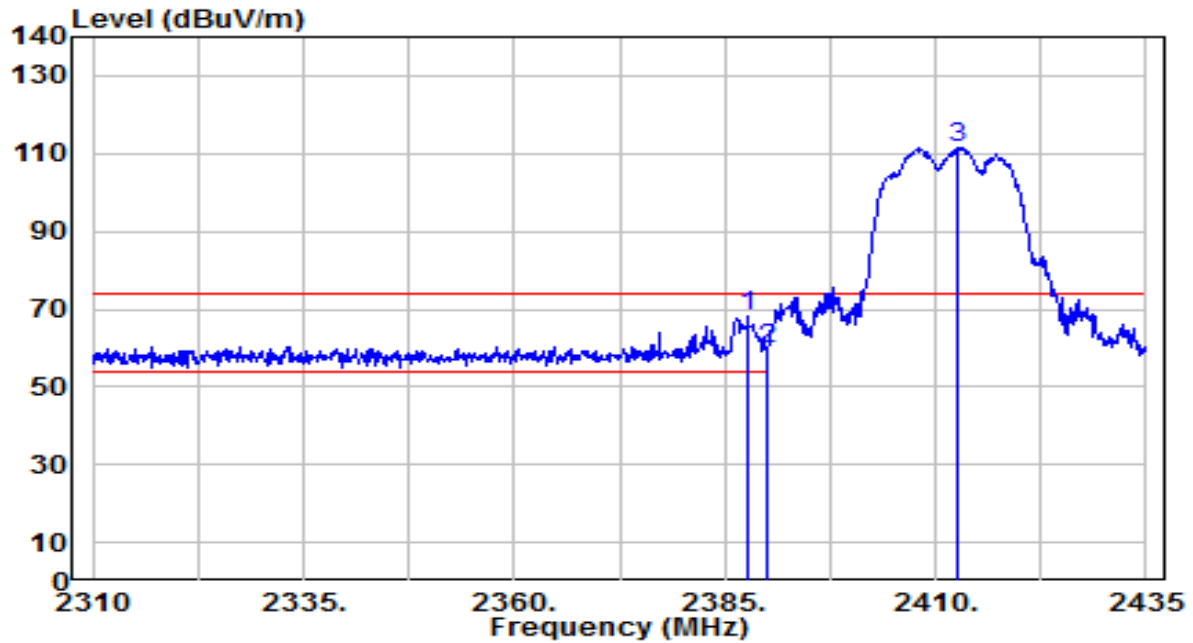


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.750	35.27	32.72	67.98	-6.02	74.00	145	330	Peak
2		2390.000	27.01	32.73	59.74	-14.26	74.00	145	330	Peak
3		2412.625	78.73	32.82	111.55	N/A	N/A	145	330	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

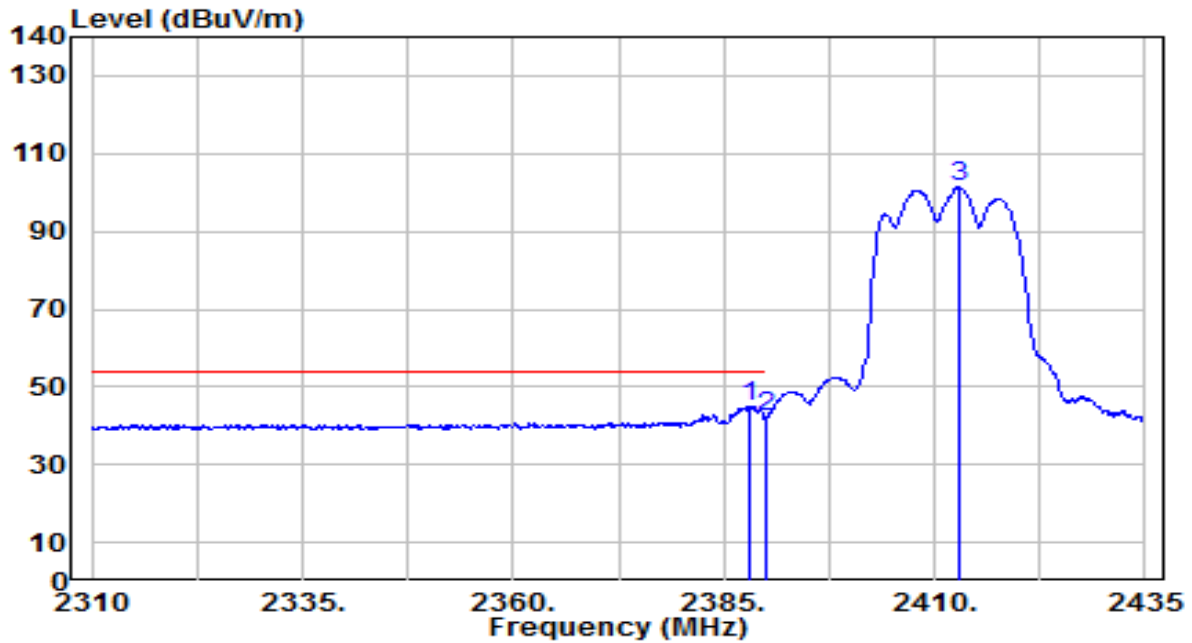


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	12.40	32.72	45.12	-8.88	54.00	145	330	Average
2		2390.000	9.36	32.73	42.09	-11.91	54.00	145	330	Average
3		2413.000	68.52	32.82	101.34	N/A	N/A	145	330	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

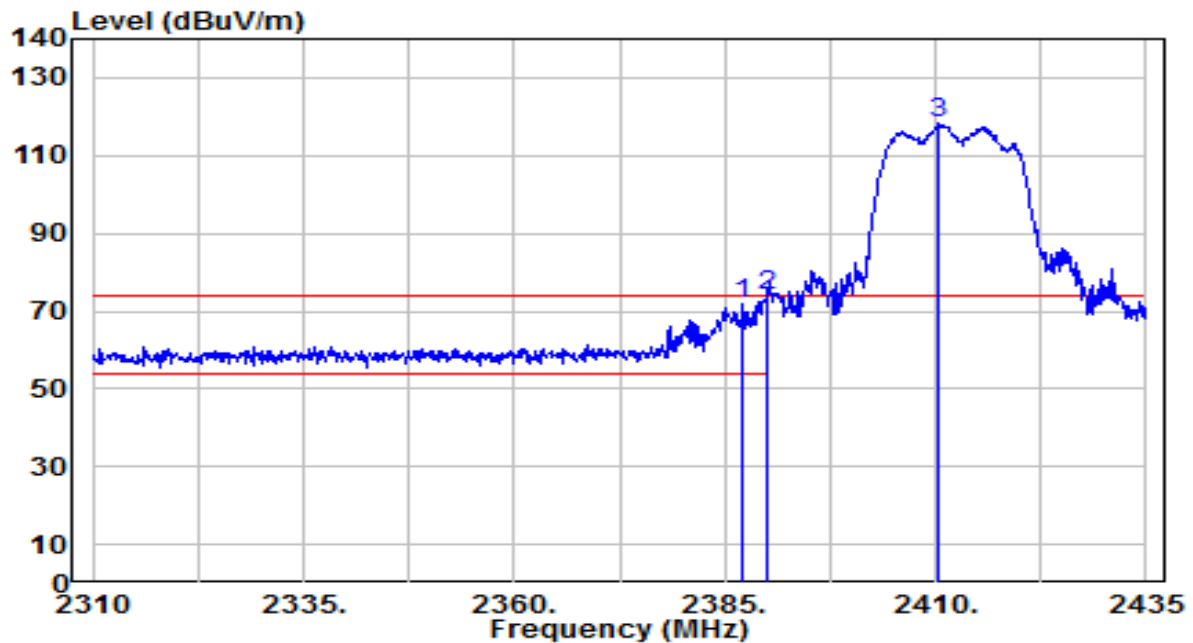


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.125	39.22	32.72	71.93	-2.07	74.00	170	245	Peak
2	* 2390.000	41.01	32.73	73.73	-0.27	74.00	170	245	Peak
3	2410.375	85.35	32.81	118.16	N/A	N/A	170	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

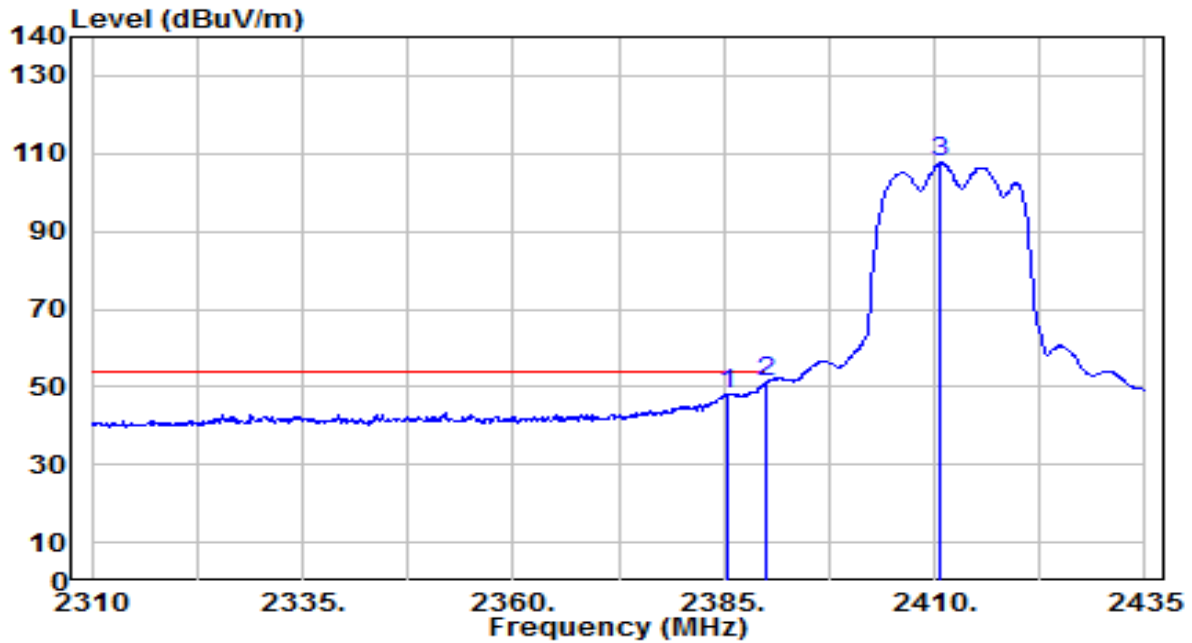


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2385.375	15.56	32.71	48.27	-5.73	54.00	170	245	Average
2	*	2390.000	18.42	32.73	51.15	-2.85	54.00	170	245	Average
3		2410.750	74.82	32.81	107.63	N/A	N/A	170	245	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

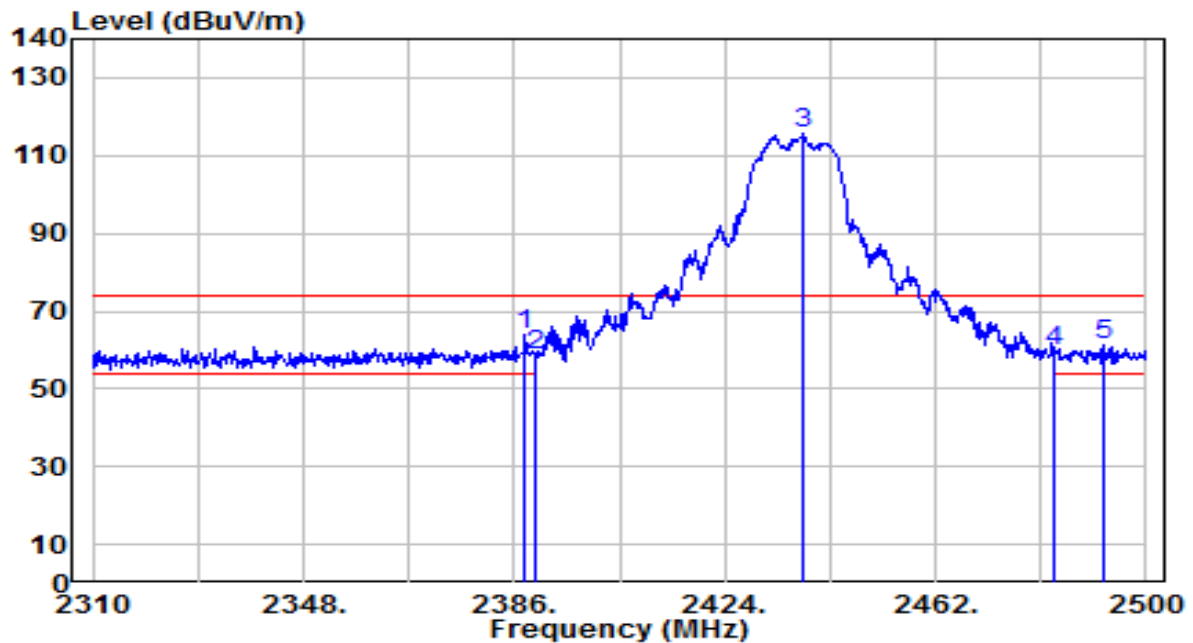


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.900	31.14	32.72	63.86	-10.14	74.00	285	115	Peak
2		2390.000	25.82	32.73	58.55	-15.45	74.00	285	115	Peak
3		2438.250	82.75	32.92	115.67	N/A	N/A	285	115	Peak
4		2483.500	26.82	33.09	59.92	-14.08	74.00	285	115	Peak
5		2492.400	27.96	33.13	61.09	-12.91	74.00	285	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

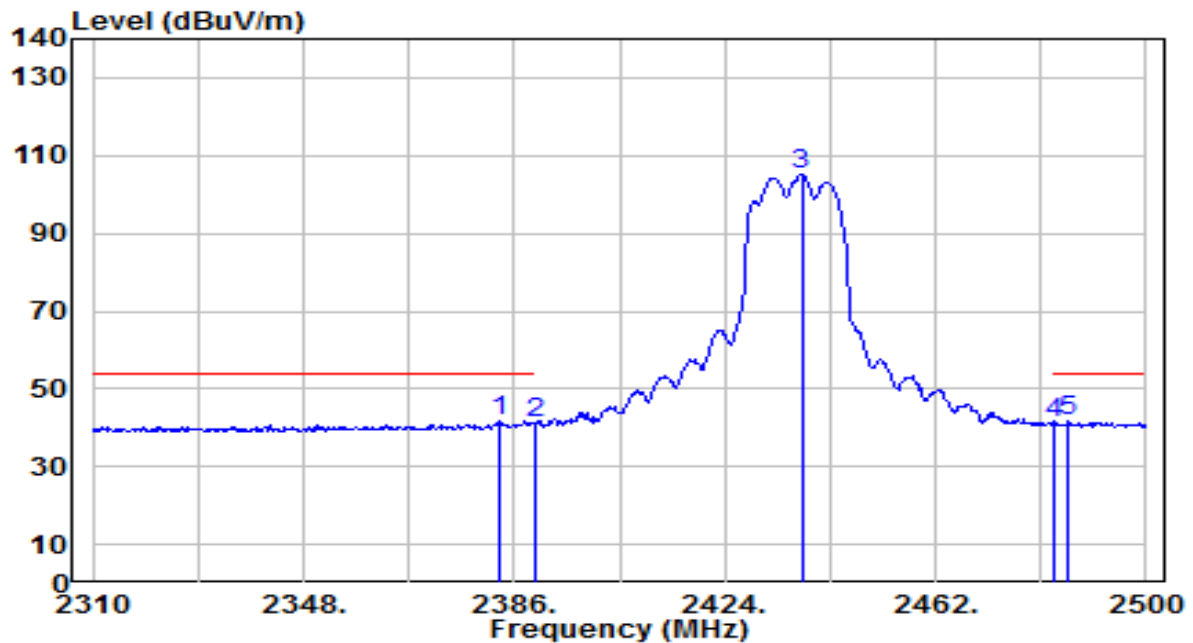


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2383.340	9.27	32.70	41.97	-12.03	54.00	285	115	Average
2		2390.000	8.71	32.73	41.44	-12.56	54.00	285	115	Average
3		2437.870	72.45	32.92	105.37	N/A	N/A	285	115	Average
4		2483.500	8.34	33.09	41.43	-12.57	54.00	285	115	Average
5		2486.130	8.59	33.11	41.70	-12.30	54.00	285	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

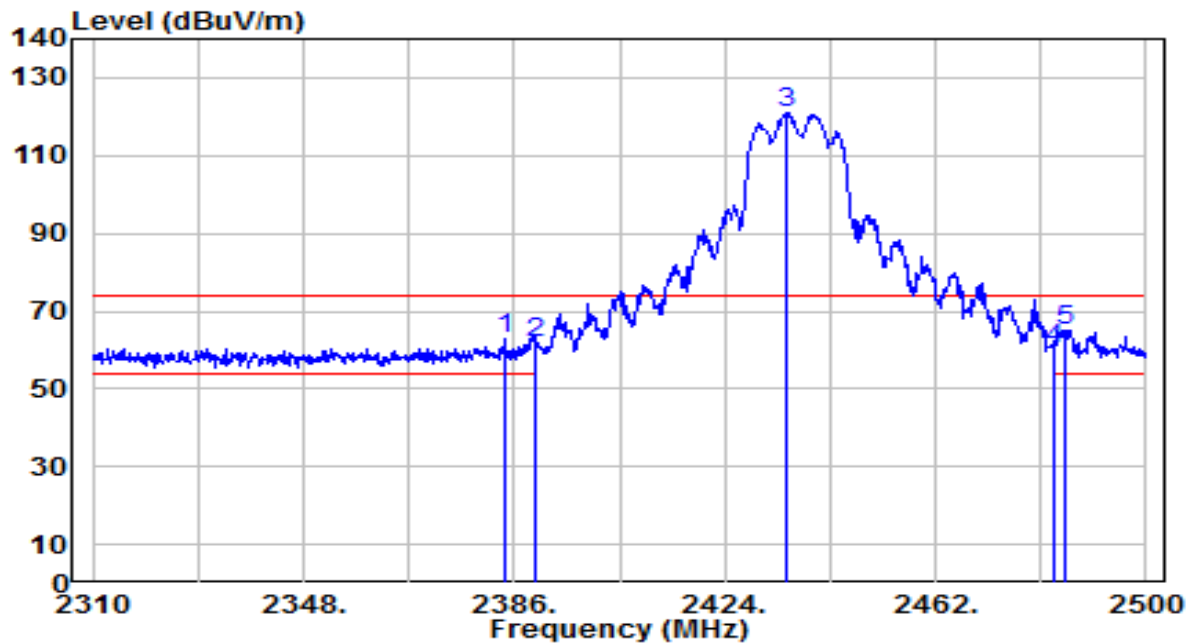


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.290	29.96	32.70	62.67	-11.33	74.00	235	85	Peak
2	2390.000	28.89	32.73	61.62	-12.38	74.00	235	85	Peak
3	2435.210	88.34	32.90	121.24	N/A	N/A	235	85	Peak
4	2483.500	27.22	33.09	60.31	-13.69	74.00	235	85	Peak
5	* 2485.180	31.97	33.10	65.07	-8.93	74.00	235	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

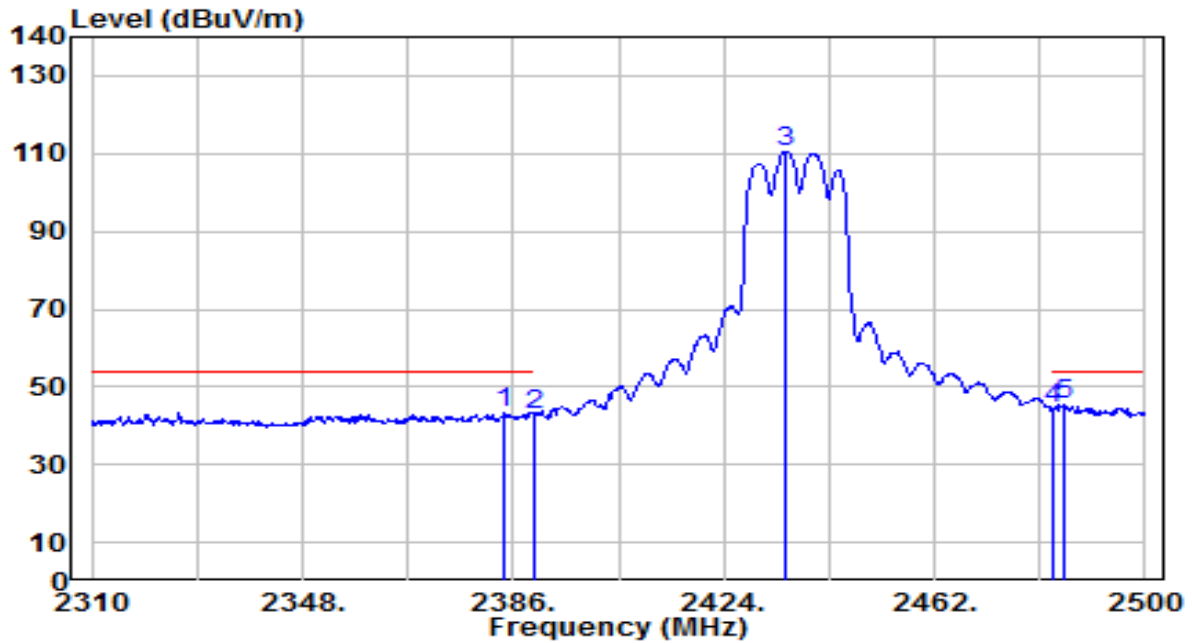


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2384.480	10.77	32.70	43.47	-10.53	54.00	235	85	Average
2	2390.000	10.26	32.73	42.99	-11.01	54.00	235	85	Average
3	2435.210	77.65	32.90	110.56	N/A	N/A	235	85	Average
4	2483.500	11.04	33.09	44.14	-9.86	54.00	235	85	Average
5	* 2485.370	12.30	33.10	45.40	-8.60	54.00	235	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

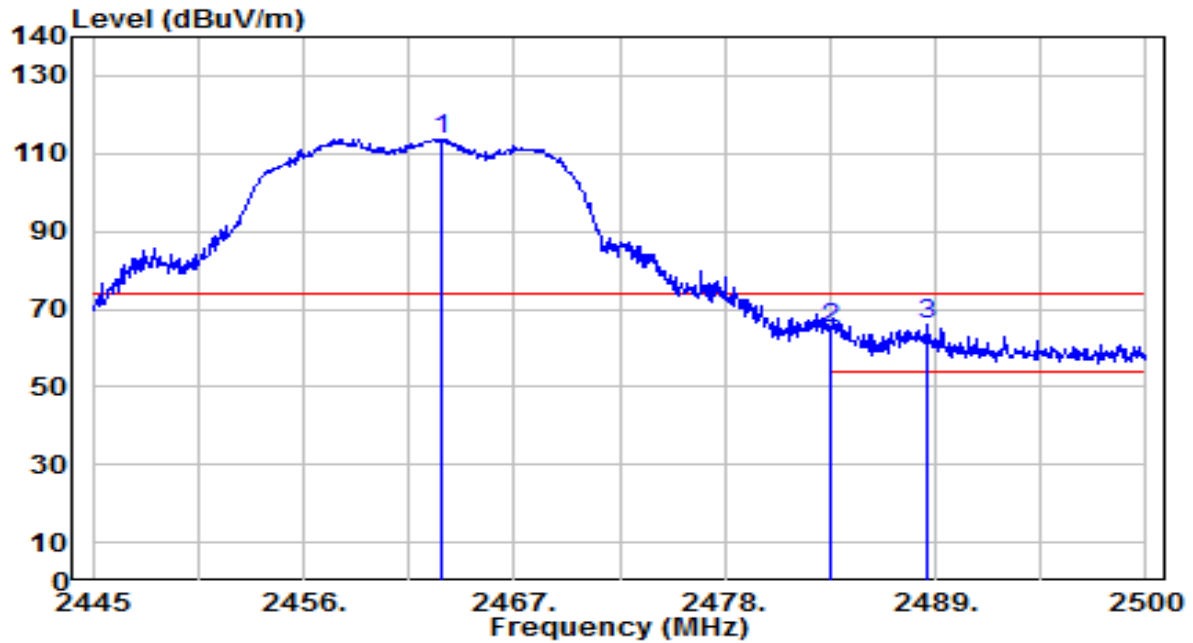


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.150	80.79	33.01	113.81	N/A	N/A	245	115	Peak
2	2483.500	31.80	33.09	64.90	-9.10	74.00	245	115	Peak
3	* 2488.505	32.85	33.11	65.97	-8.03	74.00	245	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

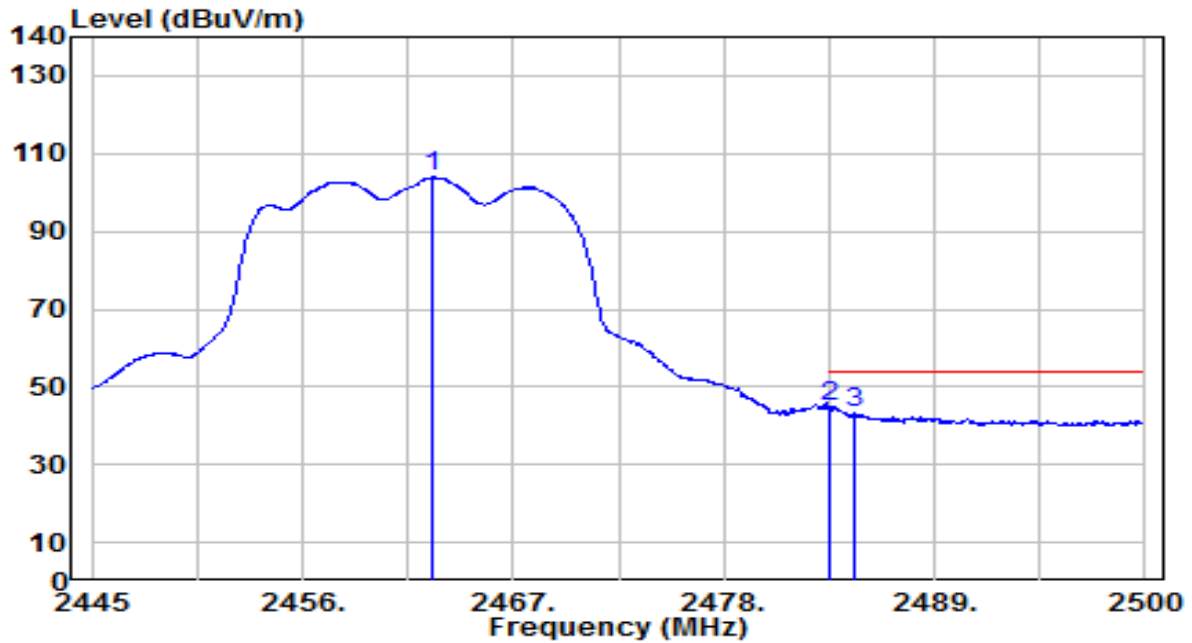


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.820	70.93	33.01	103.95	N/A	N/A	245	115	Average
2	*	2483.500	11.61	33.09	44.71	-9.29	54.00	245	115	Average
3		2484.765	10.14	33.10	43.24	-10.76	54.00	245	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

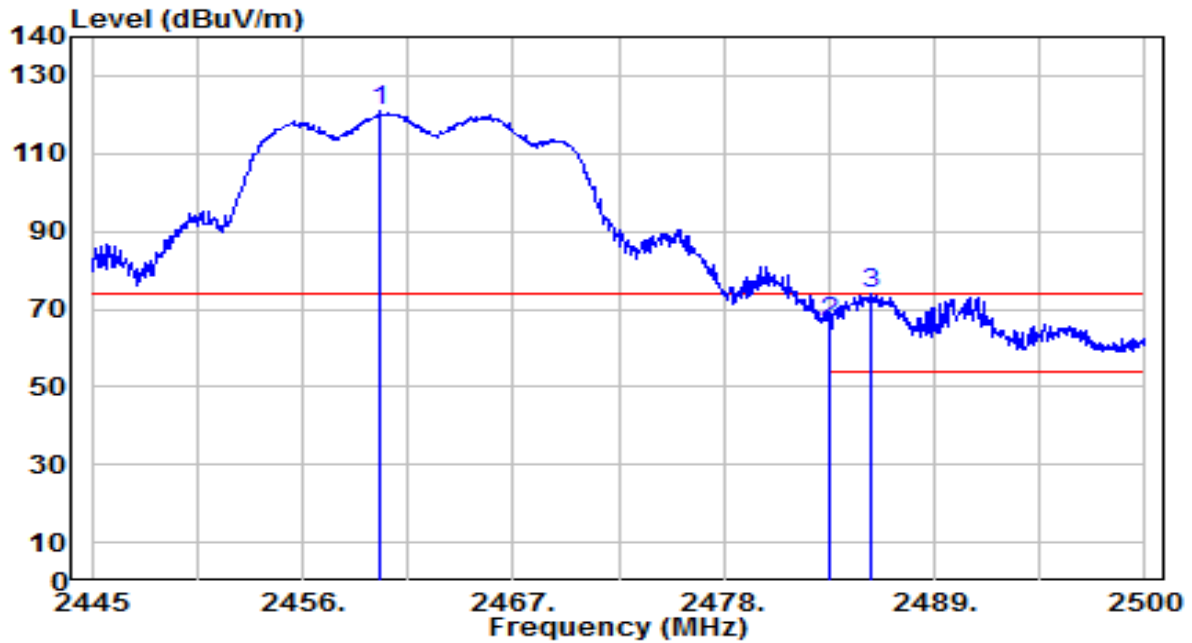


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.070	87.88	33.00	120.89	N/A	N/A	160	85	Peak
2	2483.500	33.21	33.09	66.31	-7.69	74.00	160	85	Peak
3	* 2485.700	40.74	33.10	73.84	-0.16	74.00	160	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

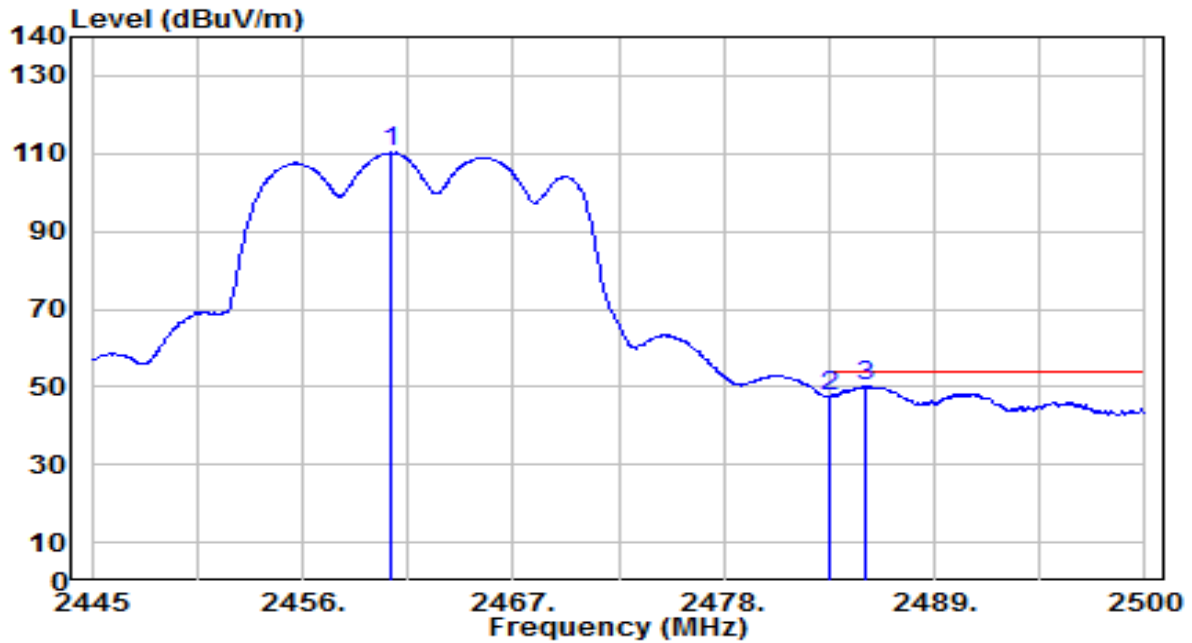


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.620	77.24	33.00	110.25	N/A	N/A	160	85	Average
2	2483.500	14.37	33.09	47.46	-6.54	54.00	160	85	Average
3	* 2485.425	17.00	33.10	50.10	-3.90	54.00	160	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

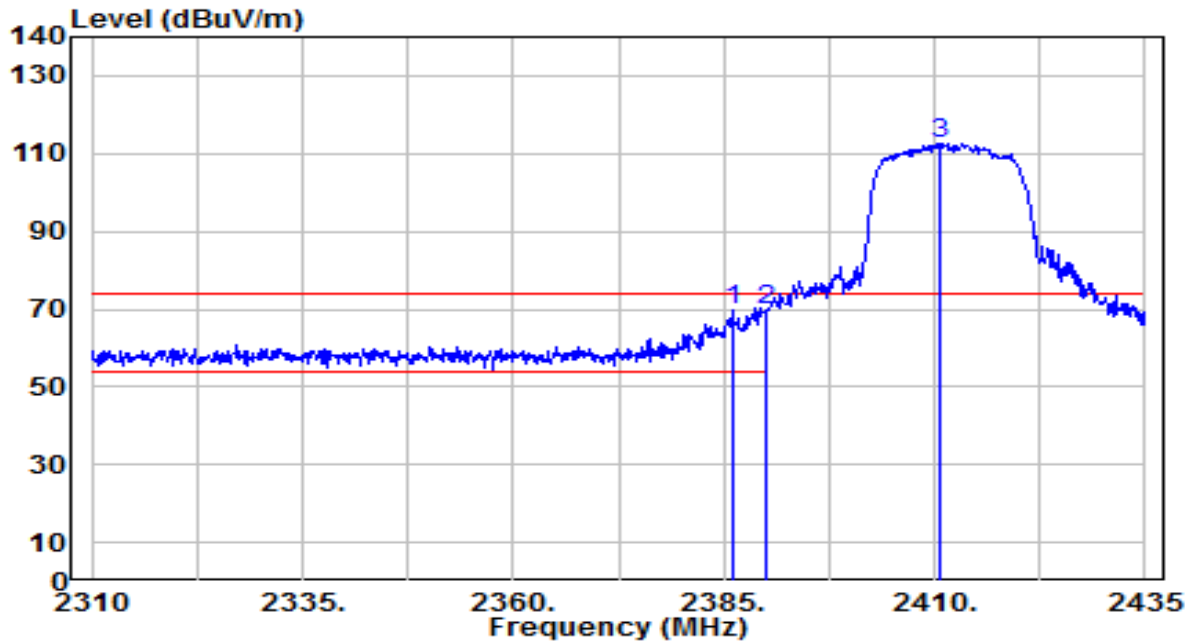


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.000	37.23	32.71	69.94	-4.06	74.00	230	115	Peak
2		2390.000	37.10	32.73	69.82	-4.18	74.00	230	115	Peak
3		2410.500	79.96	32.81	112.77	N/A	N/A	230	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

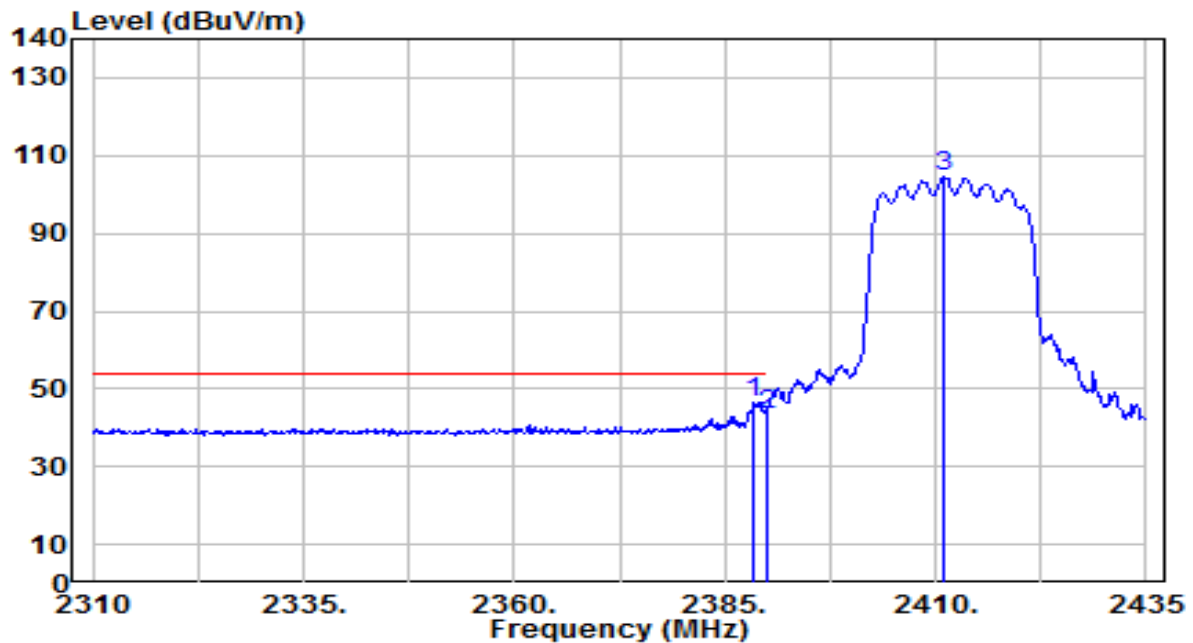


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.500	13.67	32.72	46.39	-7.61	54.00	230	115	Average
2		2390.000	10.41	32.73	43.13	-10.87	54.00	230	115	Average
3		2411.125	71.96	32.81	104.77	N/A	N/A	230	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

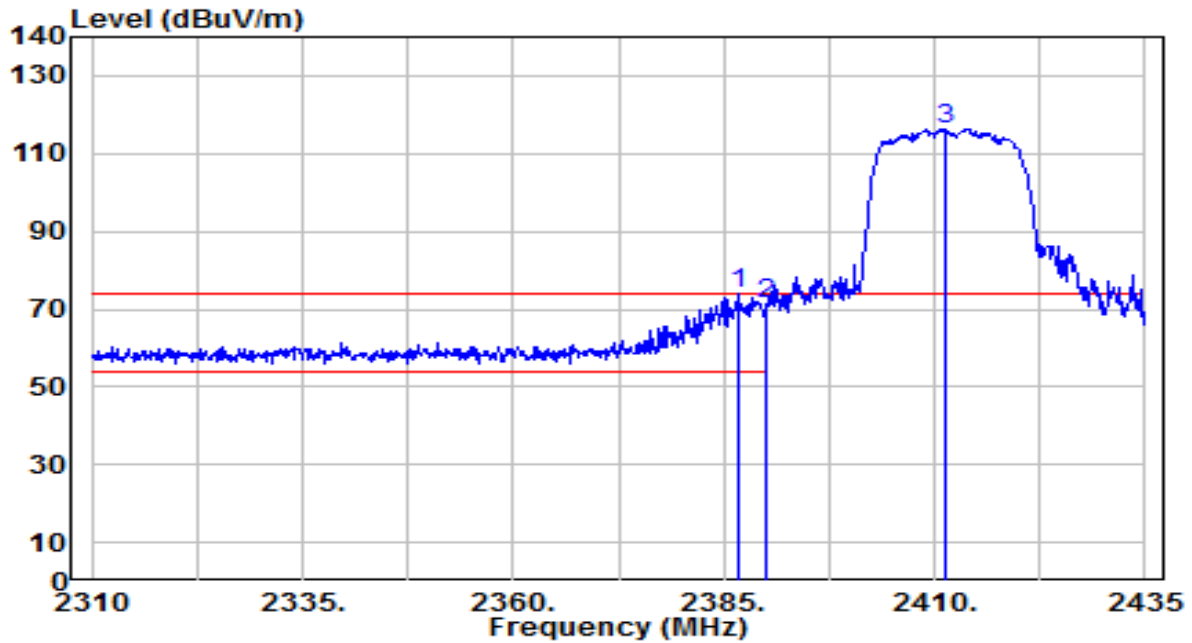


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.625	41.11	32.71	73.83	-0.17	74.00	155	230	Peak
2		2390.000	38.44	32.73	71.17	-2.83	74.00	155	230	Peak
3		2411.375	83.51	32.81	116.32	N/A	N/A	155	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

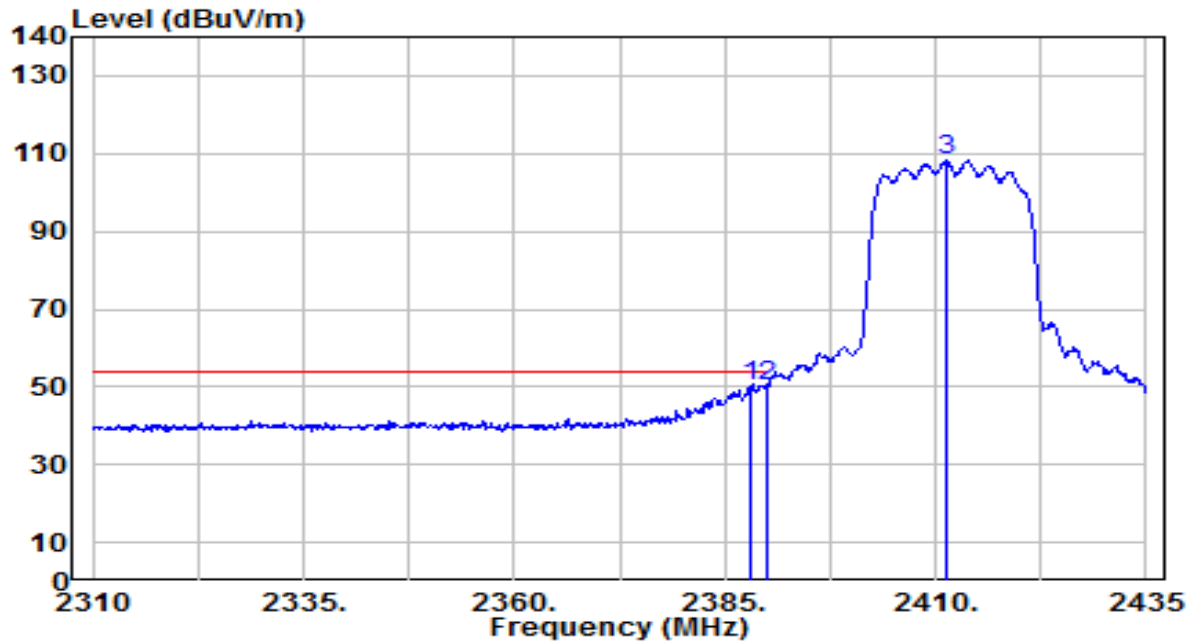


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	17.72	32.72	50.44	-3.56	54.00	155	230	Average
2		2390.000	17.41	32.73	50.14	-3.86	54.00	155	230	Average
3		2411.375	75.44	32.81	108.25	N/A	N/A	155	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

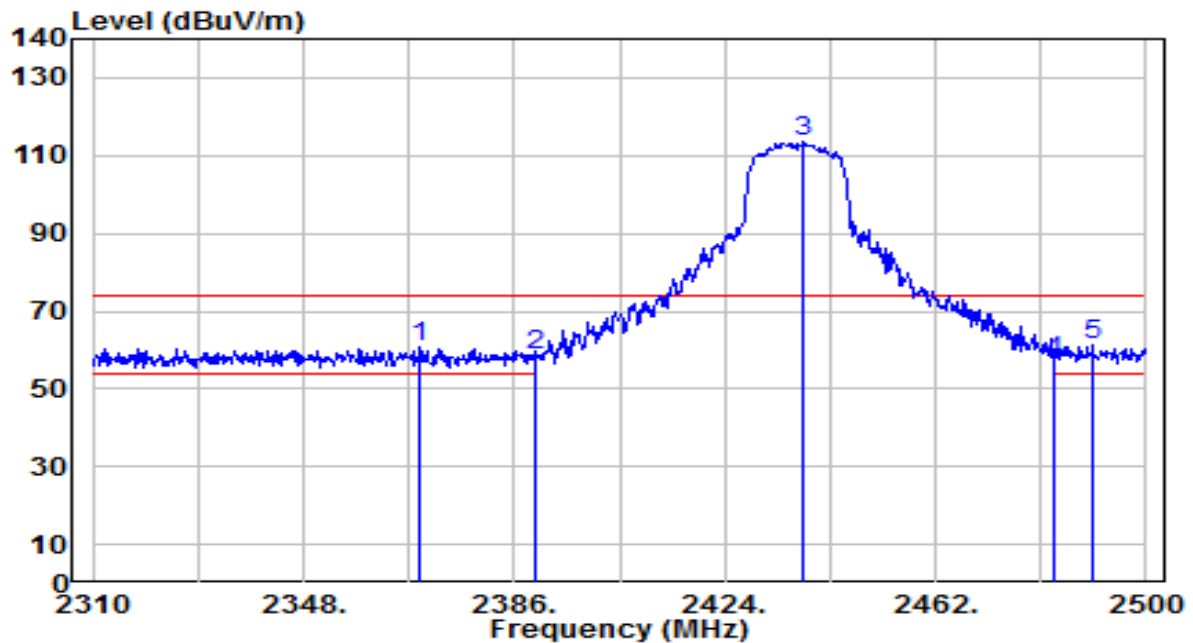


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2368.900	27.89	32.64	60.53	-13.47	74.00	230	125	Peak
2	2390.000	26.08	32.73	58.81	-15.19	74.00	230	125	Peak
3	2438.060	80.61	32.92	113.53	N/A	N/A	230	125	Peak
4	2483.500	24.03	33.09	57.12	-16.88	74.00	230	125	Peak
5	* 2490.310	28.35	33.12	61.47	-12.53	74.00	230	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

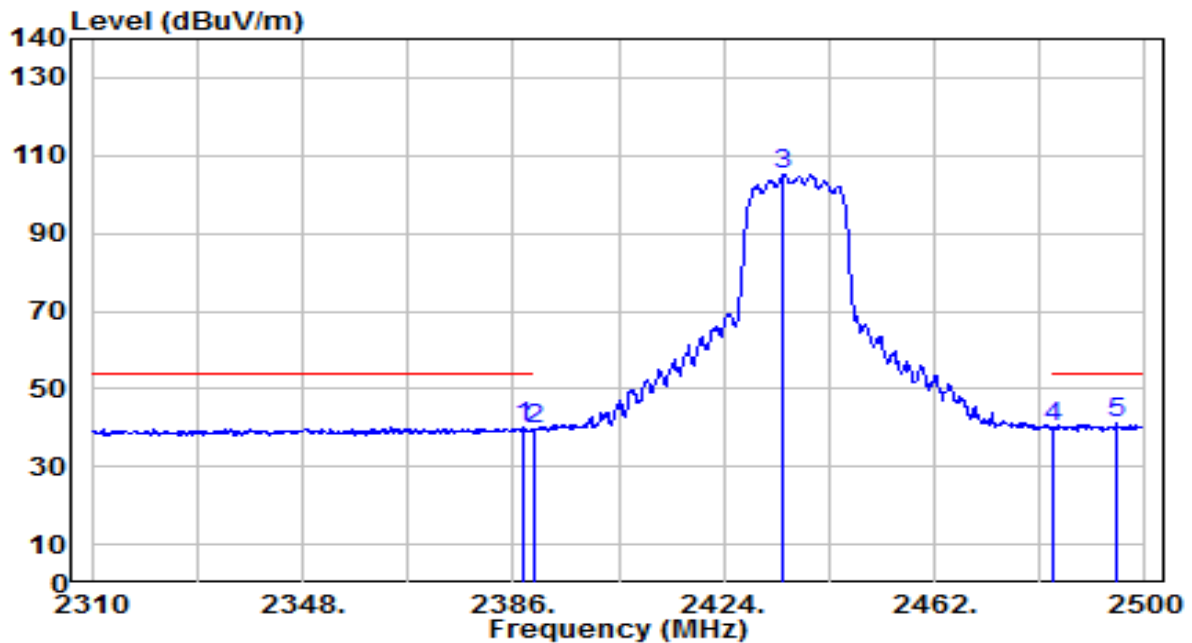


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	7.35	32.72	40.06	-13.94	54.00	230	125	Average
2	2390.000	6.99	32.73	39.71	-14.29	54.00	230	125	Average
3	2434.830	72.37	32.90	105.27	N/A	N/A	230	125	Average
4	2483.500	7.17	33.09	40.27	-13.73	54.00	230	125	Average
5	* 2494.680	7.81	33.14	40.95	-13.05	54.00	230	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

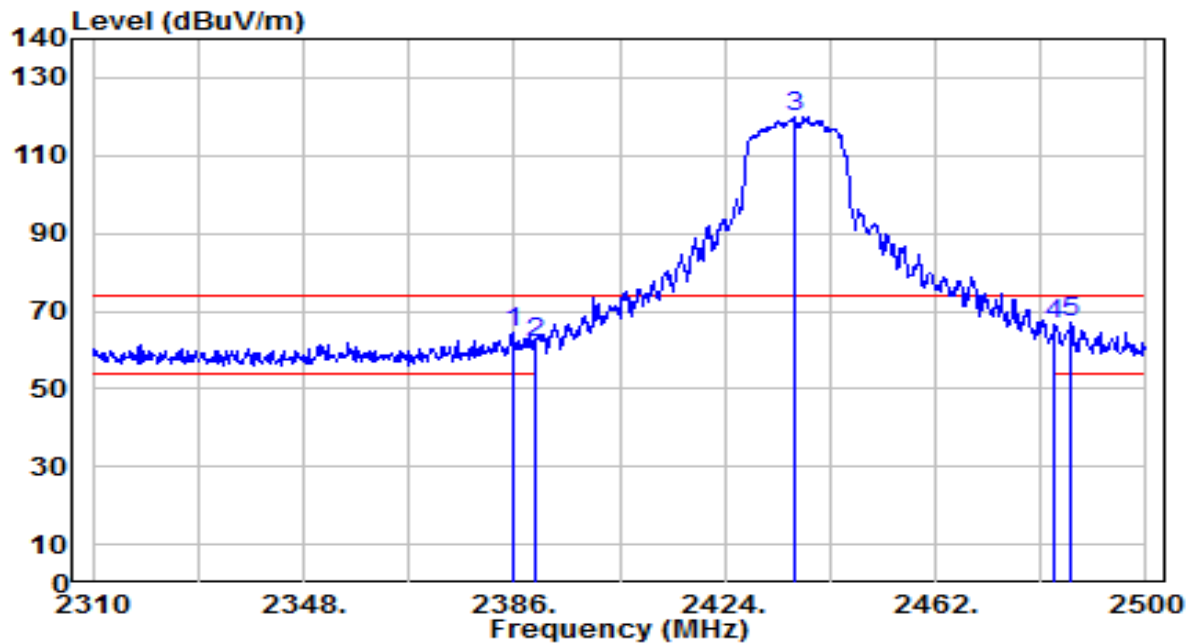


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	31.74	32.71	64.45	-9.55	74.00	145	80	Peak
2	2390.000	28.99	32.73	61.71	-12.29	74.00	145	80	Peak
3	2436.540	87.14	32.91	120.05	N/A	N/A	145	80	Peak
4	2483.500	33.36	33.09	66.45	-7.55	74.00	145	80	Peak
5	* 2486.510	34.06	33.11	67.17	-6.83	74.00	145	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

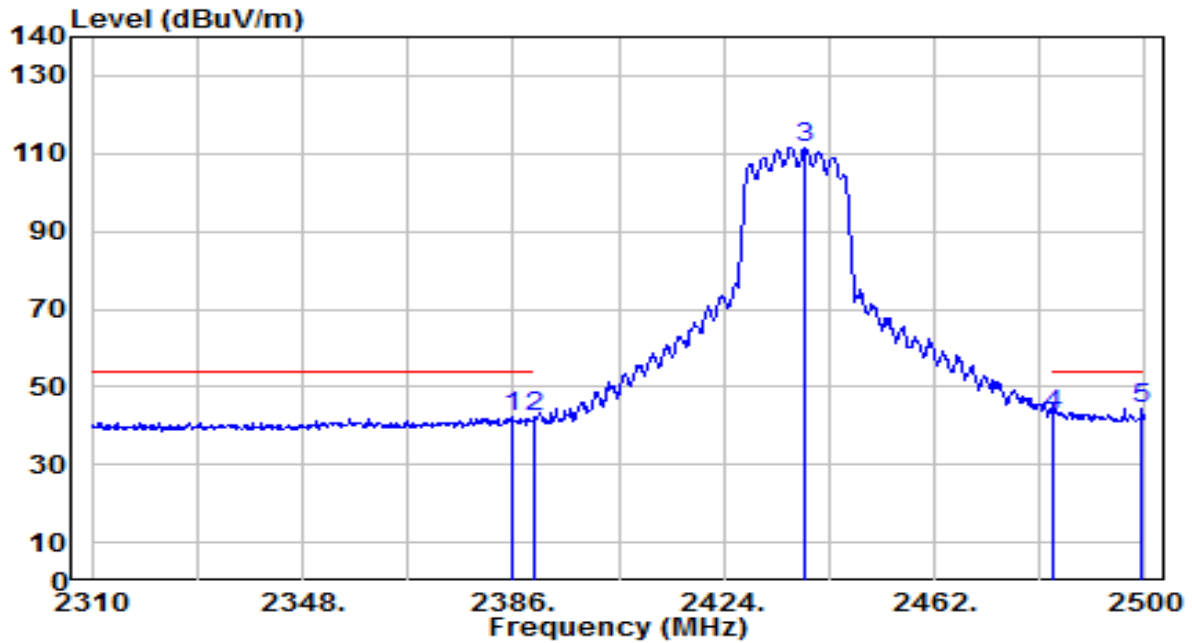


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	9.62	32.71	42.33	-11.67	54.00	145	80	Average
2	2390.000	9.60	32.73	42.33	-11.67	54.00	145	80	Average
3	2438.630	78.72	32.92	111.64	N/A	N/A	145	80	Average
4	2483.500	9.95	33.09	43.04	-10.96	54.00	145	80	Average
5	* 2499.430	11.07	33.16	44.23	-9.77	54.00	145	80	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

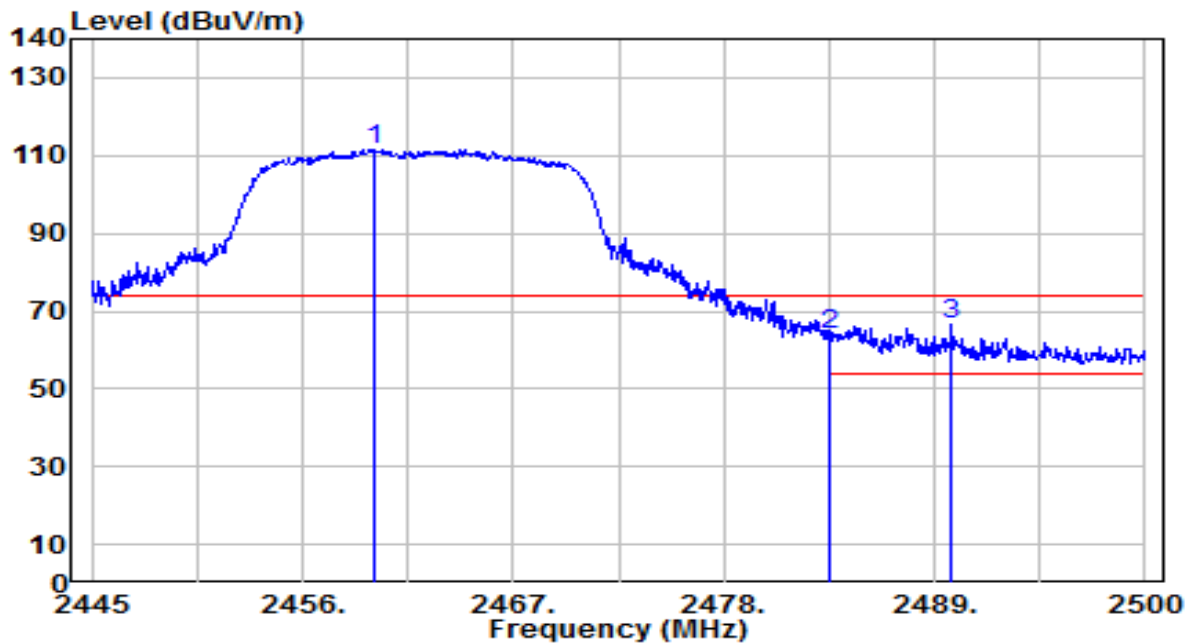


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.740	78.70	33.00	111.71	N/A	N/A	275	115	Peak
2	2483.500	30.58	33.09	63.68	-10.32	74.00	275	115	Peak
3	* 2489.880	33.25	33.12	66.37	-7.63	74.00	275	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

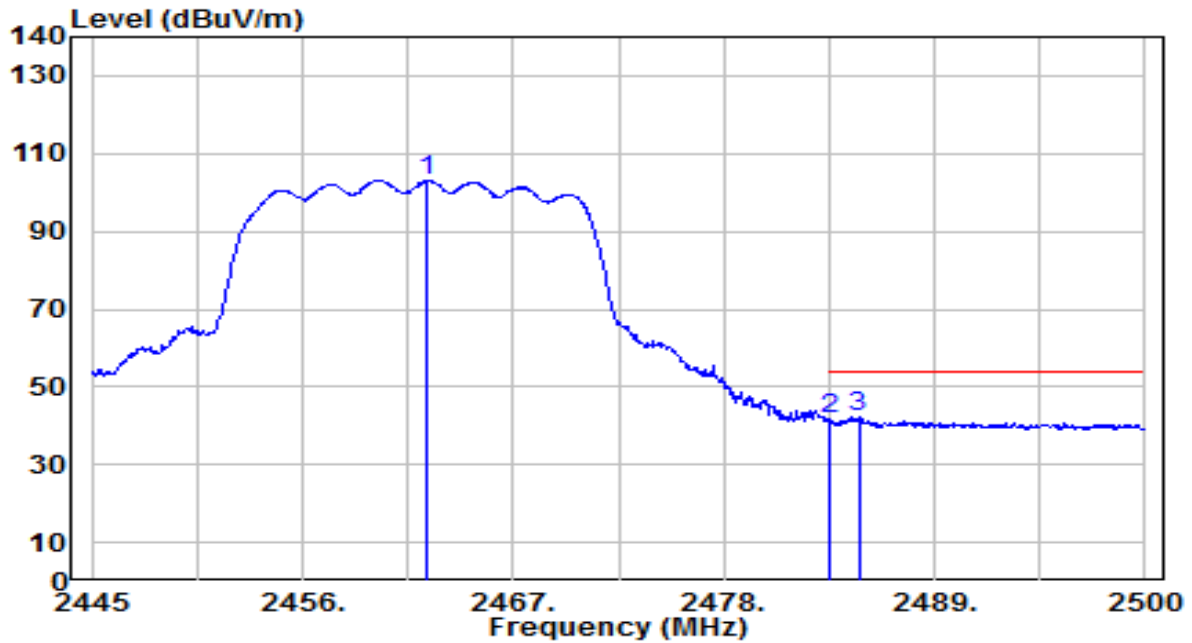


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.545	70.16	33.01	103.17	N/A	N/A	275	115	Average
2	2483.500	8.43	33.09	41.53	-12.47	54.00	275	115	Average
3	* 2485.040	9.35	33.10	42.45	-11.55	54.00	275	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

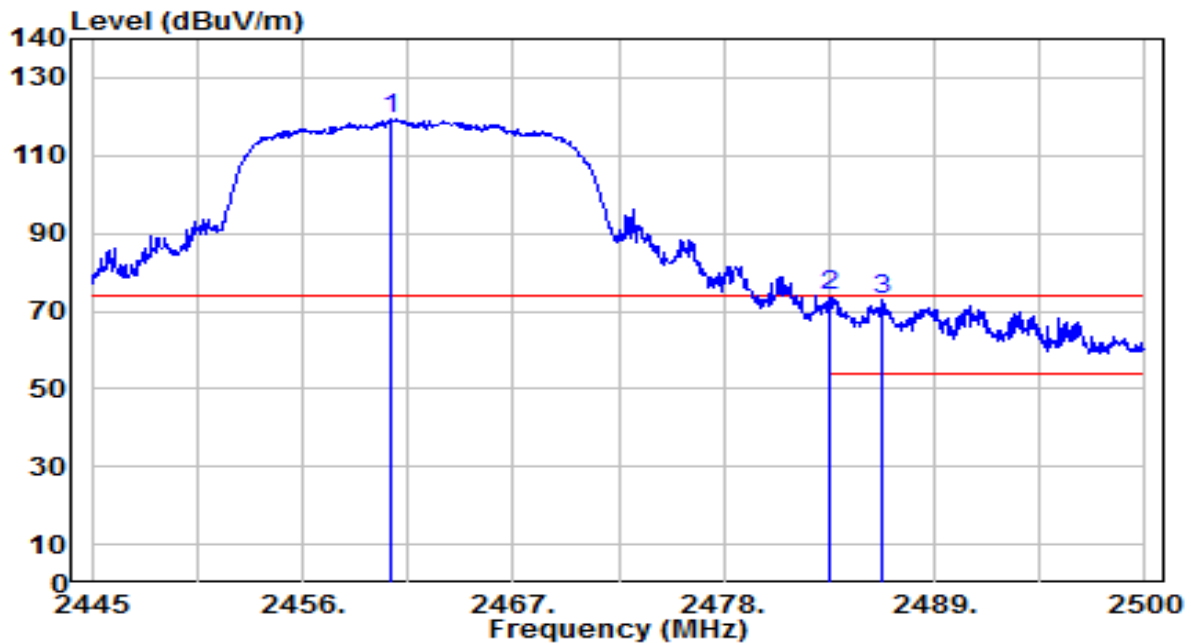


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.565	86.23	33.00	119.24	N/A	N/A	205	95	Peak
2	* 2483.500	40.66	33.09	73.76	-0.24	74.00	205	95	Peak
3	2486.250	39.79	33.11	72.89	-1.11	74.00	205	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

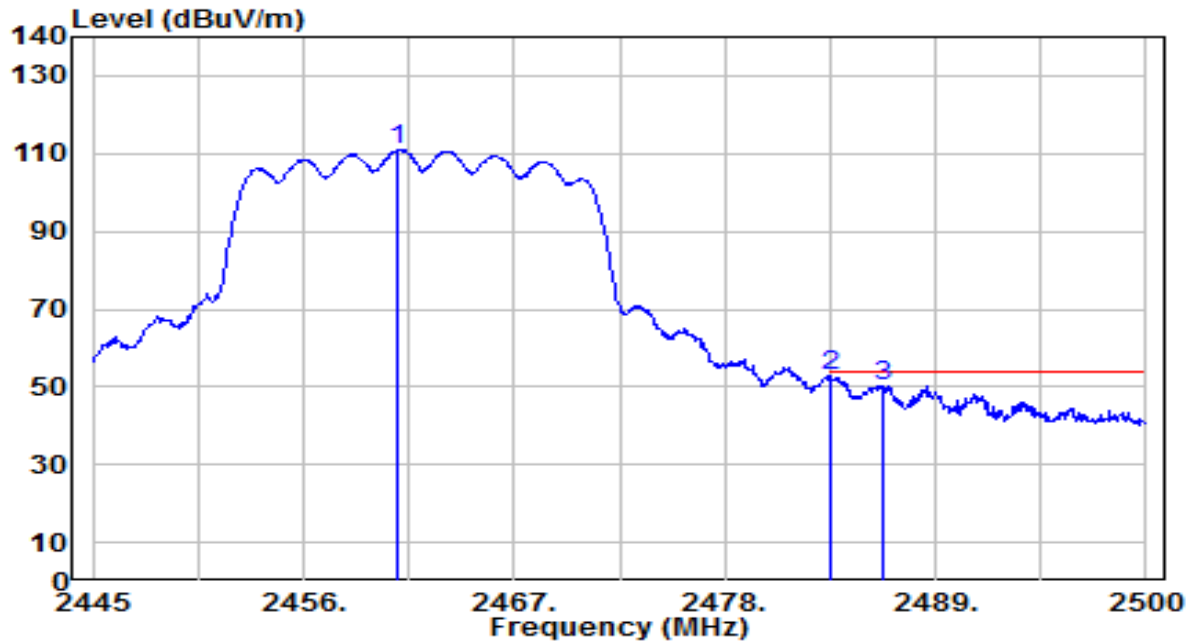


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2460.950	78.12	33.01	111.13	N/A	N/A	205	95	Average
2	* 2483.500	19.49	33.09	52.59	-1.41	54.00	205	95	Average
3	2486.195	17.24	33.11	50.34	-3.66	54.00	205	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

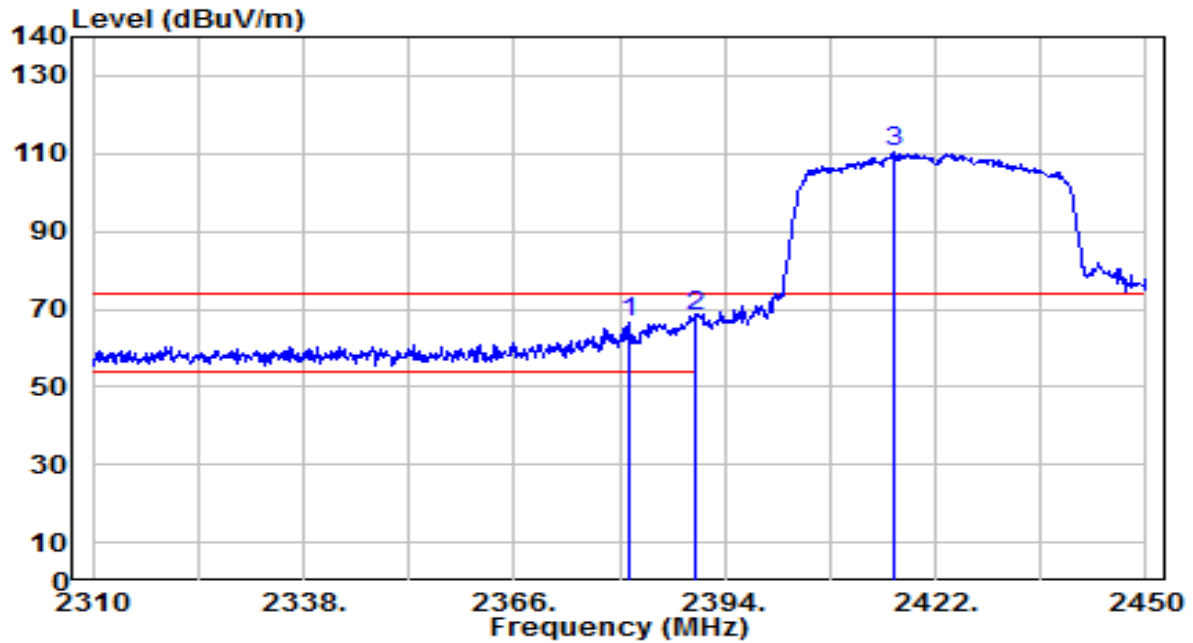


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2381.120	33.73	32.69	66.42	-7.58	74.00	230	115	Peak
2	*	2390.000	35.61	32.73	68.33	-5.67	74.00	230	115	Peak
3		2416.400	77.51	32.83	110.34	N/A	N/A	230	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

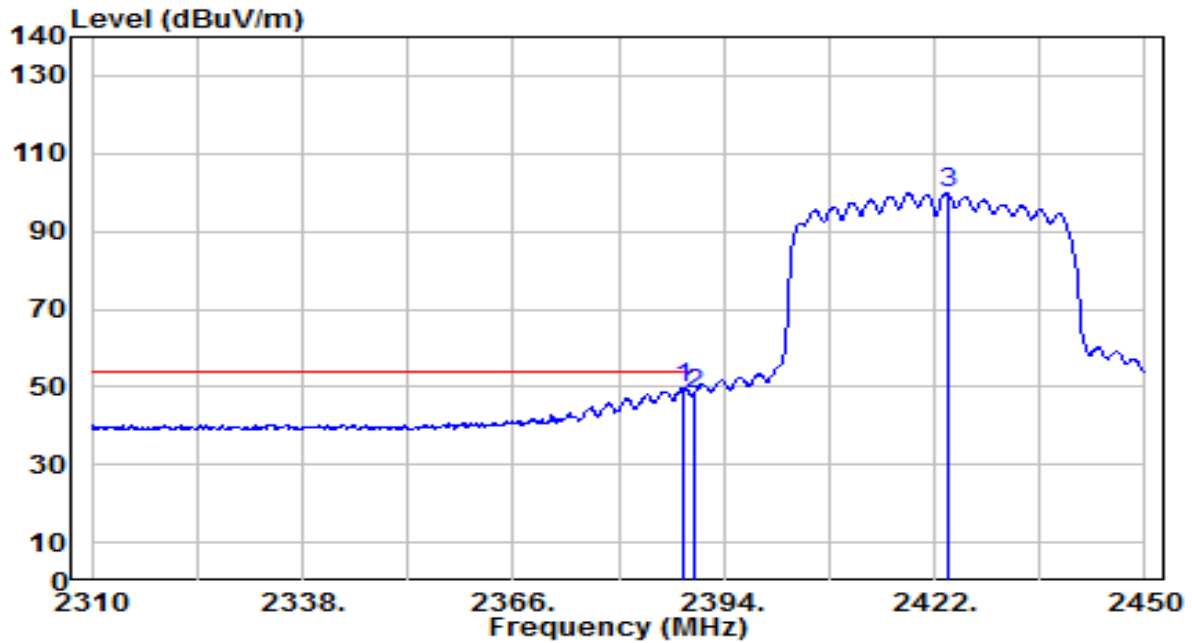


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.540	17.02	32.72	49.74	-4.26	54.00	230	115	Average
2		2390.000	15.52	32.73	48.25	-5.75	54.00	230	115	Average
3		2423.680	67.03	32.86	99.89	N/A	N/A	230	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

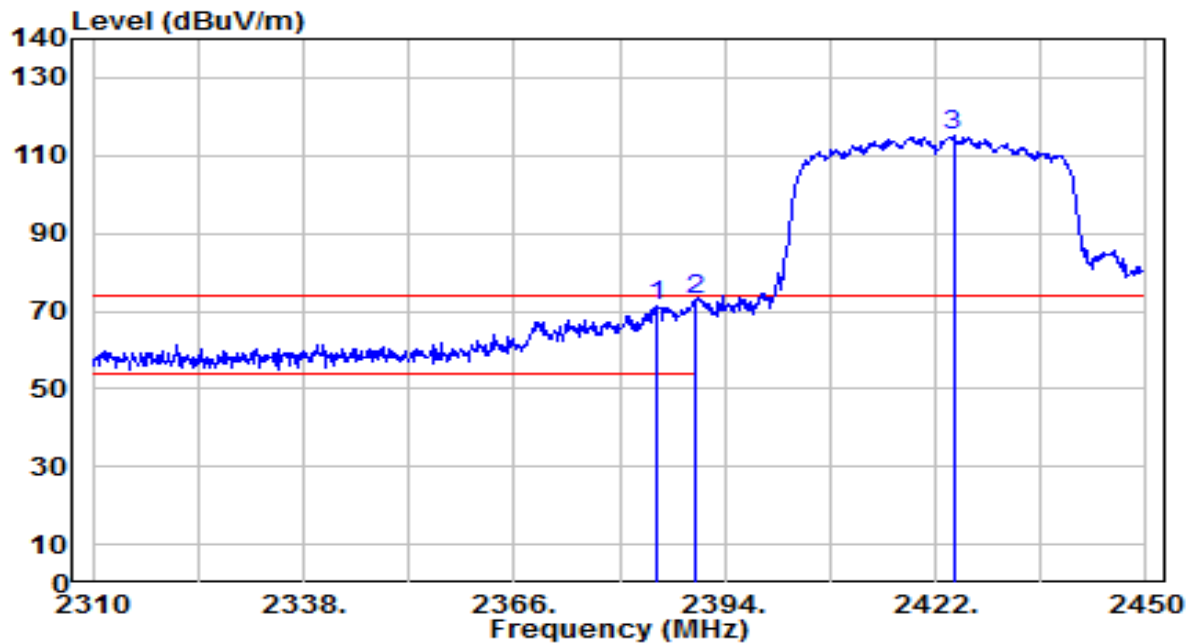


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2384.900	38.48	32.71	71.19	-2.81	74.00	155	230	Peak
2	*	2390.000	40.17	32.73	72.90	-1.10	74.00	155	230	Peak
3		2424.380	82.12	32.86	114.98	N/A	N/A	155	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

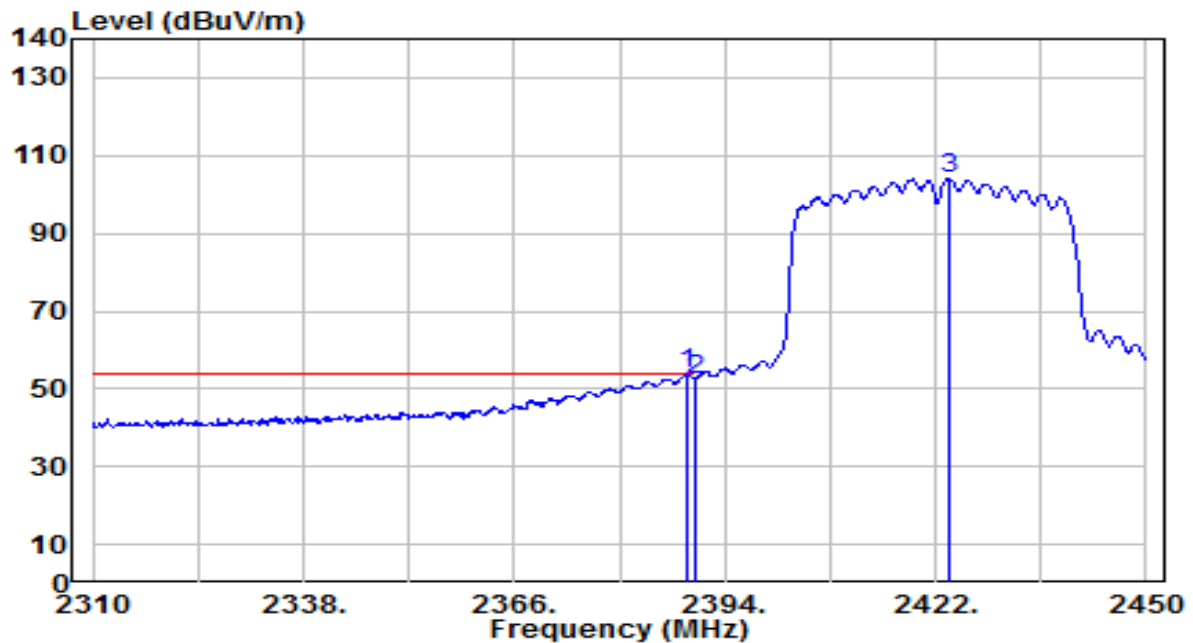


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	21.05	32.72	53.77	-0.23	54.00	155	230	Average
2		2390.000	19.80	32.73	52.53	-1.47	54.00	155	230	Average
3		2423.680	71.25	32.86	104.11	N/A	N/A	155	230	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

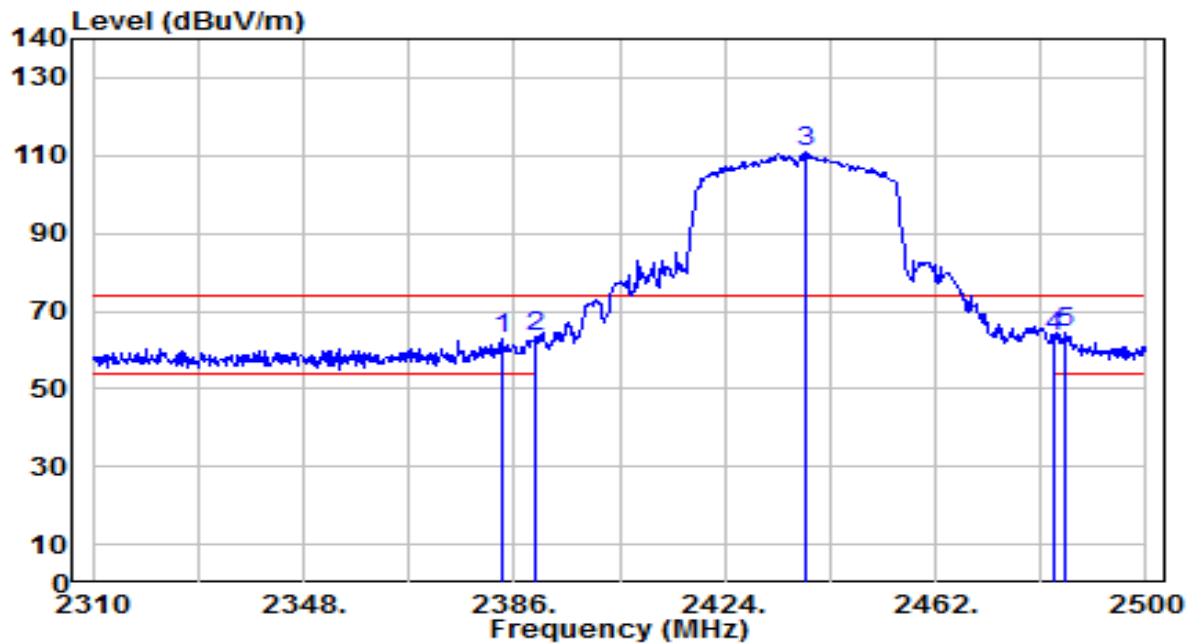


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.720	29.93	32.70	62.63	-11.37	74.00	230	125	Peak
2	2390.000	30.83	32.73	63.55	-10.45	74.00	230	125	Peak
3	2438.440	77.90	32.92	110.82	N/A	N/A	230	125	Peak
4	2483.500	30.27	33.09	63.37	-10.63	74.00	230	125	Peak
5	* 2485.180	31.26	33.10	64.36	-9.64	74.00	230	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

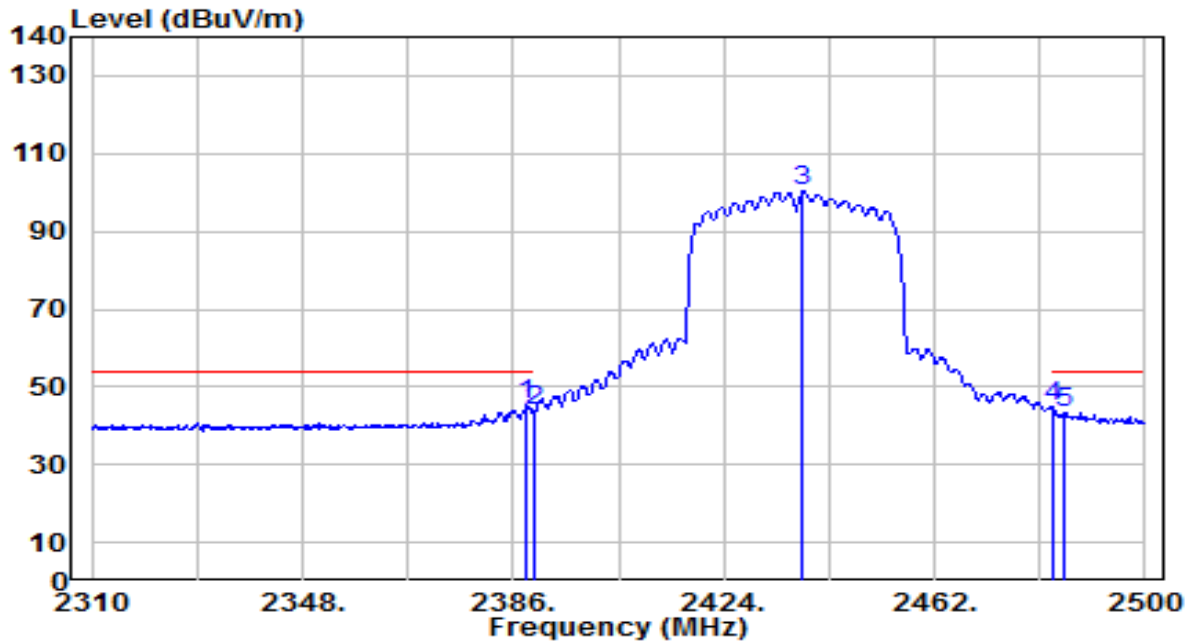


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.470	12.53	32.72	45.26	-8.74	54.00	230	125	Average
2		2390.000	11.24	32.73	43.97	-10.03	54.00	230	125	Average
3		2438.250	67.28	32.92	100.20	N/A	N/A	230	125	Average
4		2483.500	11.66	33.09	44.75	-9.25	54.00	230	125	Average
5		2485.370	10.30	33.10	43.40	-10.60	54.00	230	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

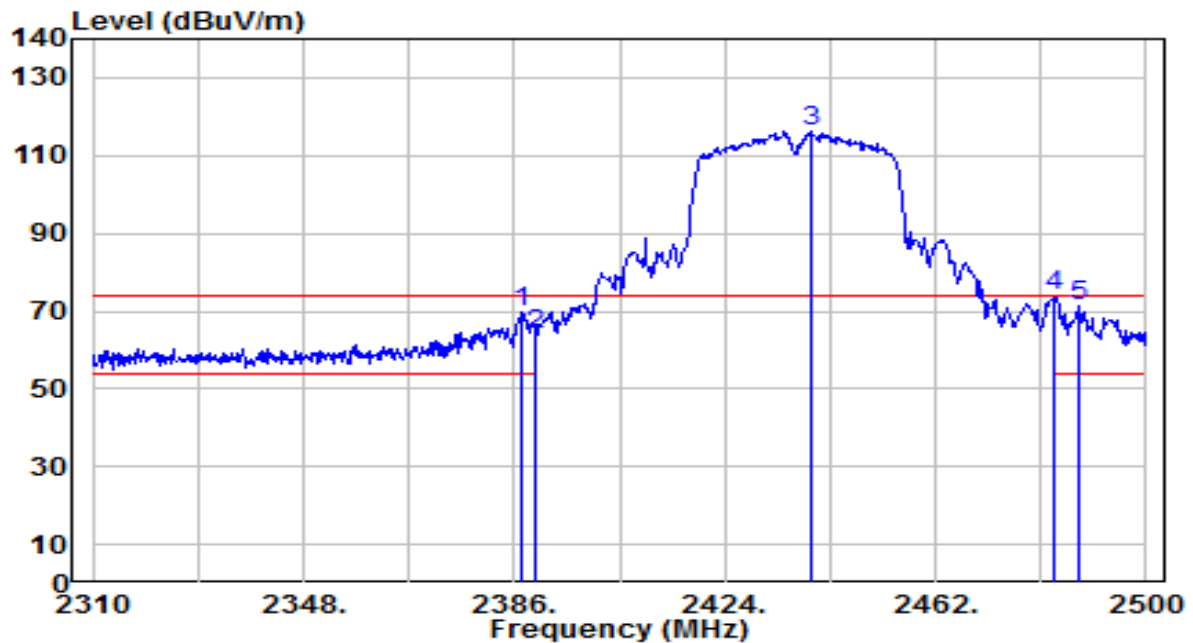


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	36.77	32.72	69.49	-4.51	74.00	145	80	Peak
2	2390.000	31.42	32.73	64.15	-9.85	74.00	145	80	Peak
3	2439.770	83.24	32.92	116.16	N/A	N/A	145	80	Peak
4	* 2483.500	40.65	33.09	73.74	-0.26	74.00	145	80	Peak
5	2487.650	38.15	33.11	71.26	-2.74	74.00	145	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

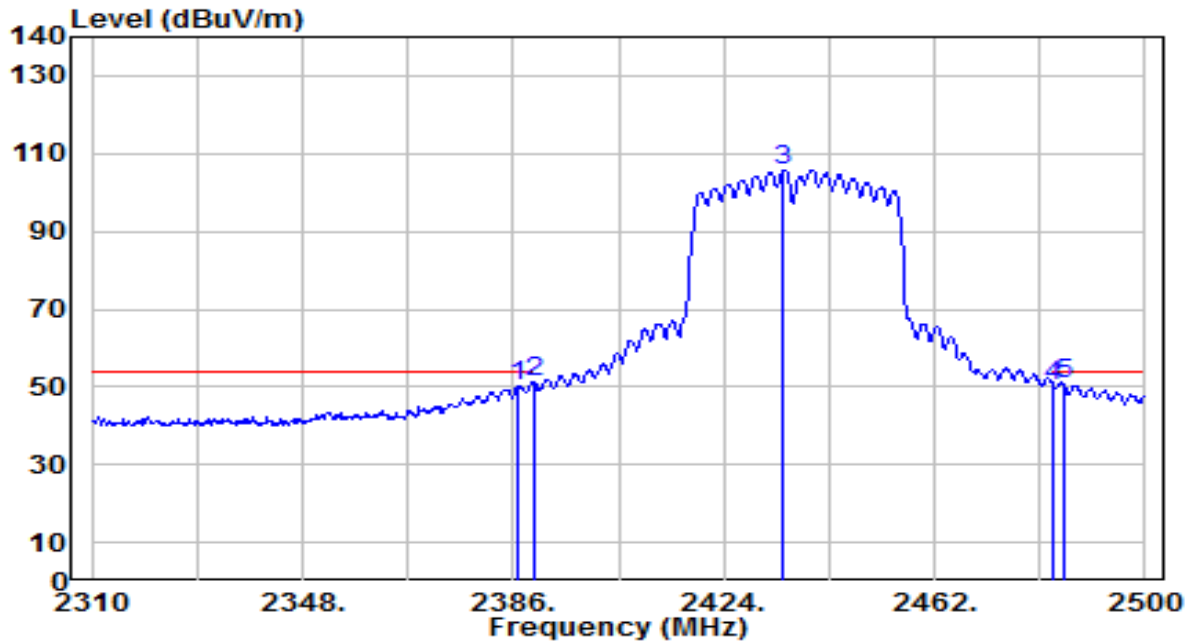


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.950	17.46	32.71	50.18	-3.82	54.00	145	80	Average
2	*	2390.000	18.31	32.73	51.04	-2.96	54.00	145	80	Average
3		2434.830	72.99	32.90	105.89	N/A	N/A	145	80	Average
4		2483.500	16.95	33.09	50.05	-3.95	54.00	145	80	Average
5		2485.370	17.71	33.10	50.82	-3.18	54.00	145	80	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

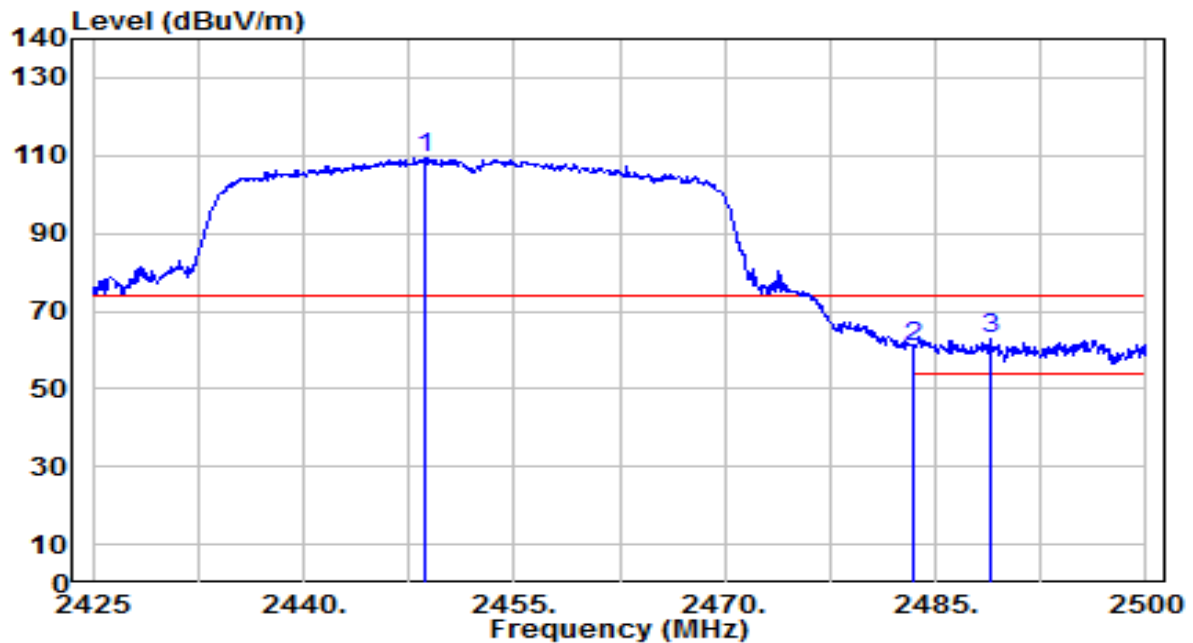


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.625	76.47	32.96	109.43	N/A	N/A	275	115	Peak
2	2483.500	27.82	33.09	60.92	-13.08	74.00	275	115	Peak
3	* 2488.975	29.73	33.12	62.85	-11.15	74.00	275	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

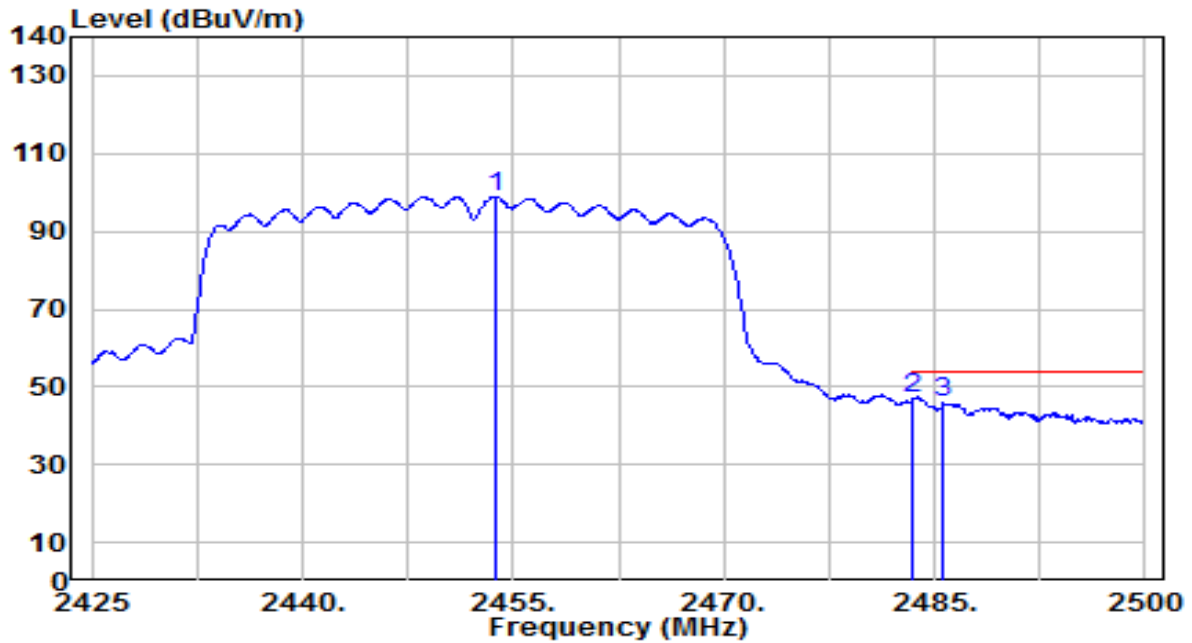


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2453.800	65.94	32.98	98.92	N/A	N/A	275	115	Average
2	*	2483.500	13.89	33.09	46.98	-7.02	54.00	275	115	Average
3		2485.675	12.64	33.10	45.75	-8.25	54.00	275	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

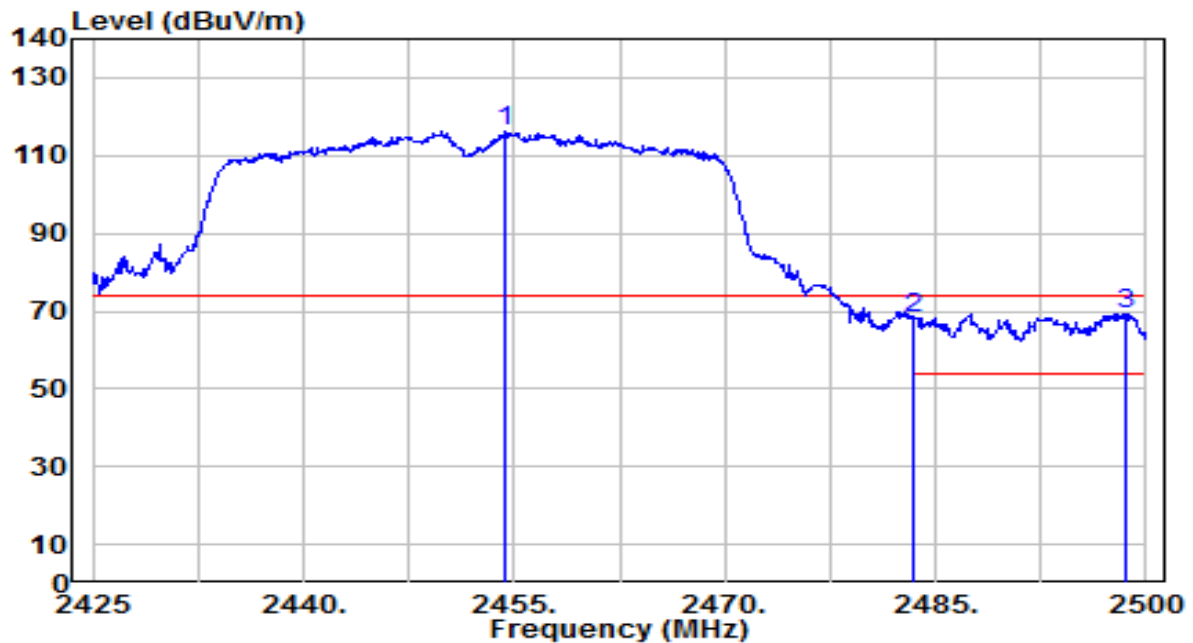


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.325	83.27	32.98	116.25	N/A	N/A	205	95	Peak
2	2483.500	35.03	33.09	68.13	-5.87	74.00	205	95	Peak
3	* 2498.650	36.25	33.15	69.41	-4.59	74.00	205	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

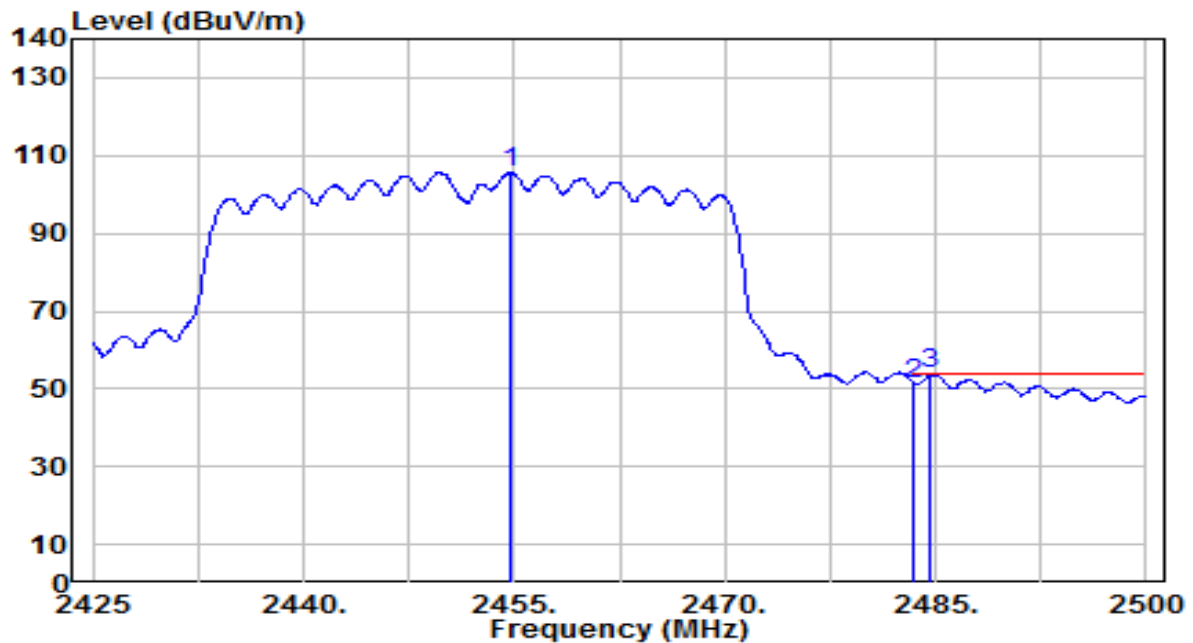


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.775	72.80	32.98	105.78	N/A	N/A	205	95	Average
2	2483.500	18.08	33.09	51.18	-2.82	54.00	205	95	Average
3	* 2484.625	20.64	33.10	53.74	-0.26	54.00	205	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

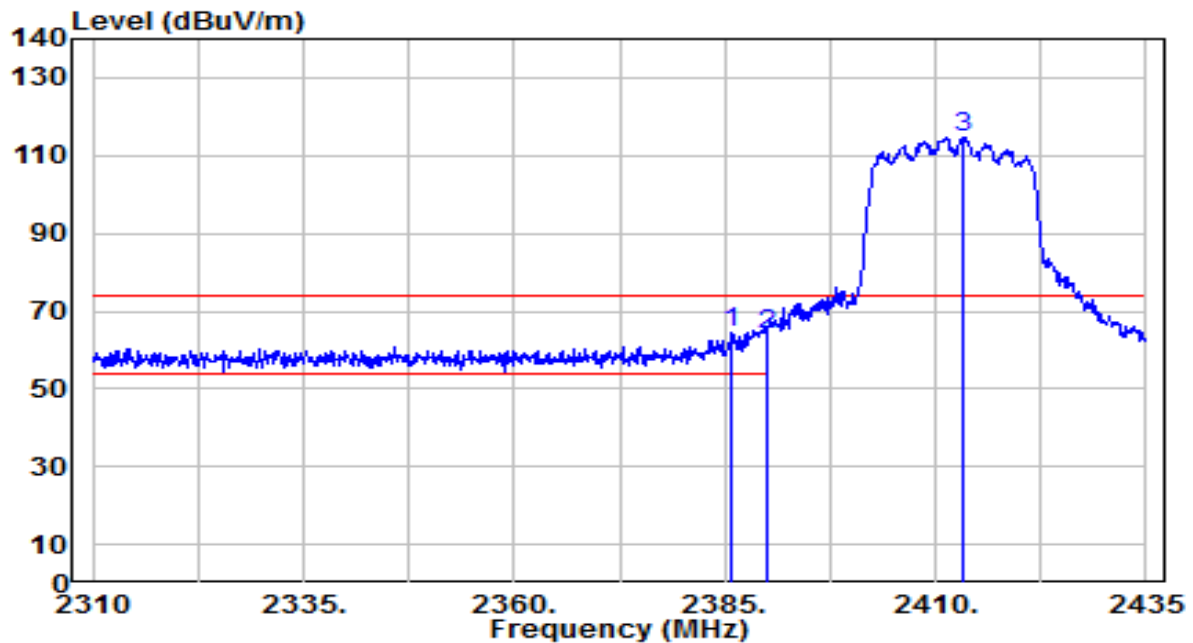


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.875	31.74	32.71	64.45	-9.55	74.00	230	115	Peak
2		2390.000	31.13	32.73	63.86	-10.14	74.00	230	115	Peak
3		2413.125	82.03	32.82	114.85	N/A	N/A	230	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

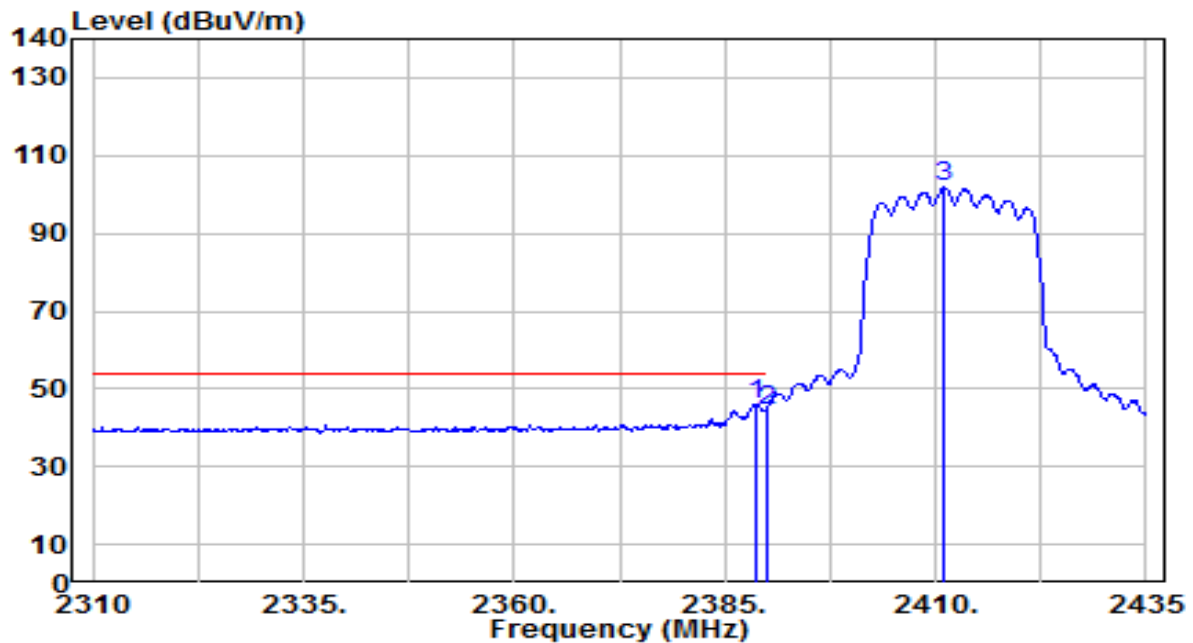


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.625	13.05	32.72	45.78	-8.22	54.00	230	115	Average
2		2390.000	11.48	32.73	44.21	-9.79	54.00	230	115	Average
3		2411.125	68.94	32.81	101.75	N/A	N/A	230	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

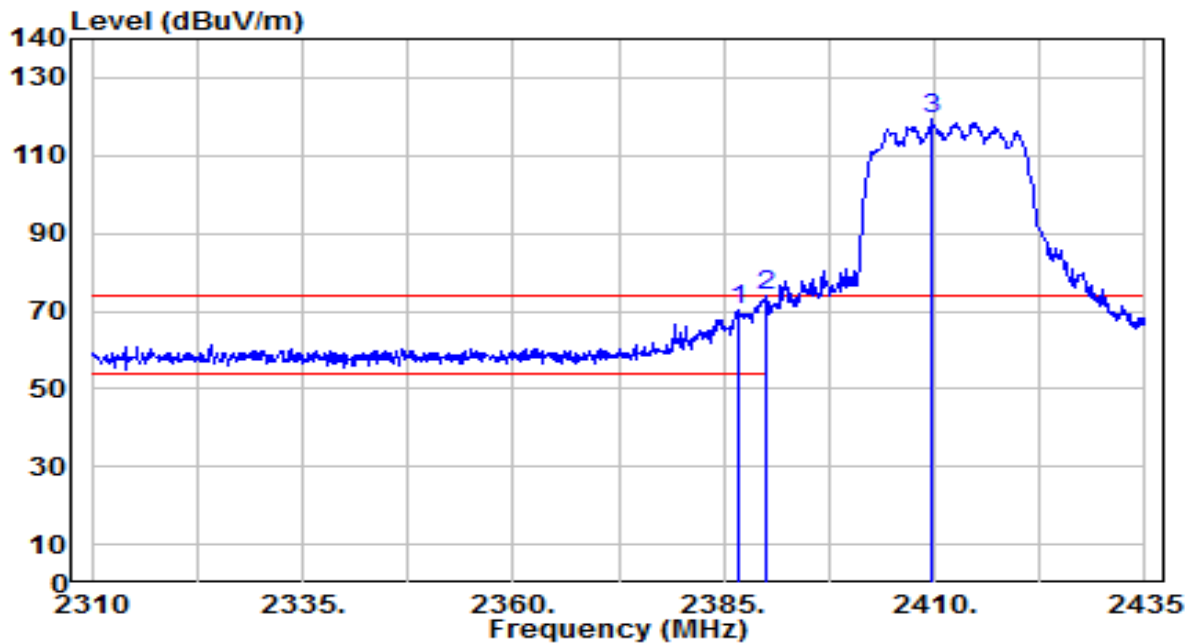


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.875	37.37	32.71	70.08	-3.92	74.00	190	75	Peak
2	* 2390.000	40.98	32.73	73.71	-0.29	74.00	190	75	Peak
3	2409.750	86.42	32.80	119.22	N/A	N/A	190	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

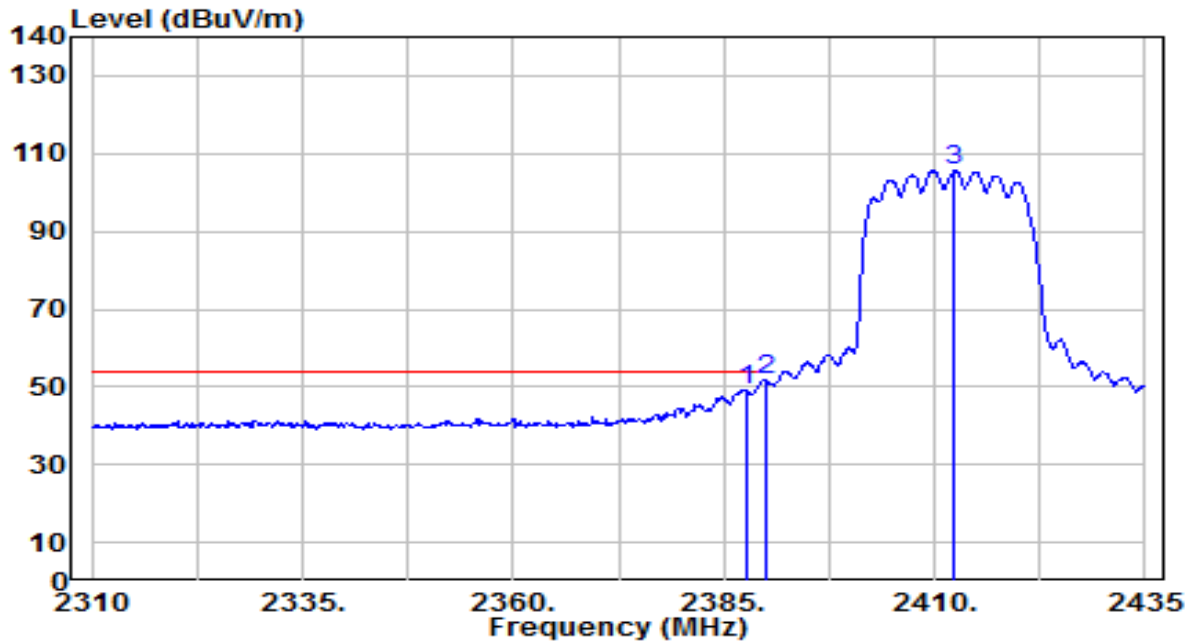


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.625	16.44	32.72	49.15	-4.85	54.00	190	75	Average
2	* 2390.000	18.98	32.73	51.70	-2.30	54.00	190	75	Average
3	2412.375	73.05	32.81	105.87	N/A	N/A	190	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

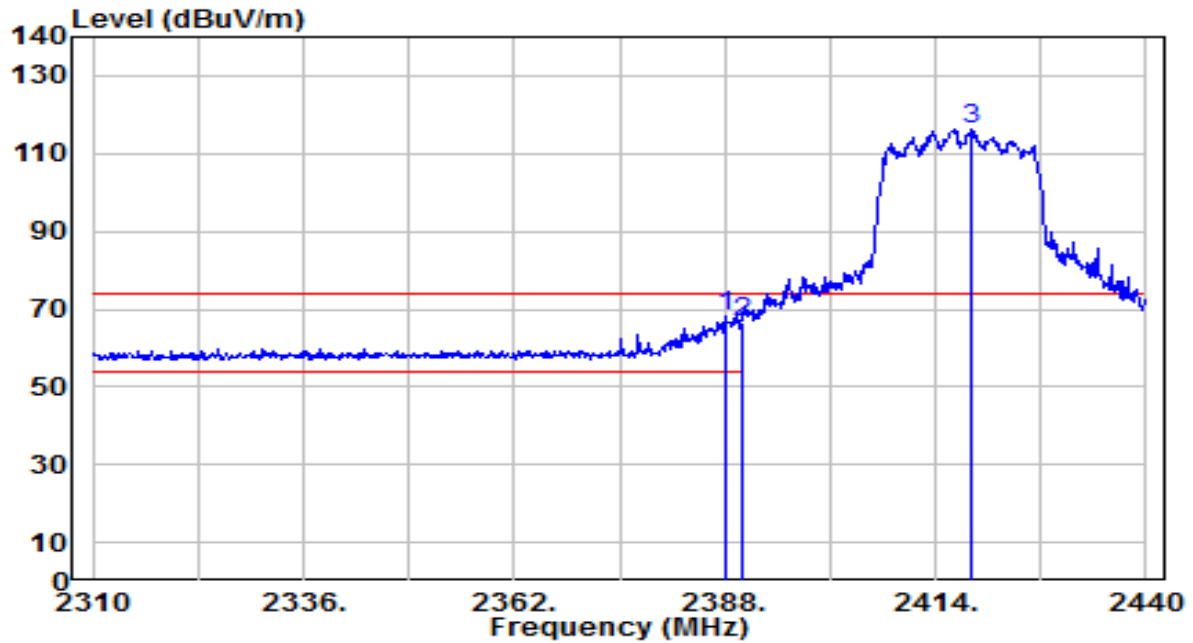


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	35.38	32.72	68.10	-5.90	74.00	230	115	Peak
2		2390.000	33.82	32.73	66.55	-7.45	74.00	230	115	Peak
3		2418.290	83.21	32.84	116.05	N/A	N/A	230	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

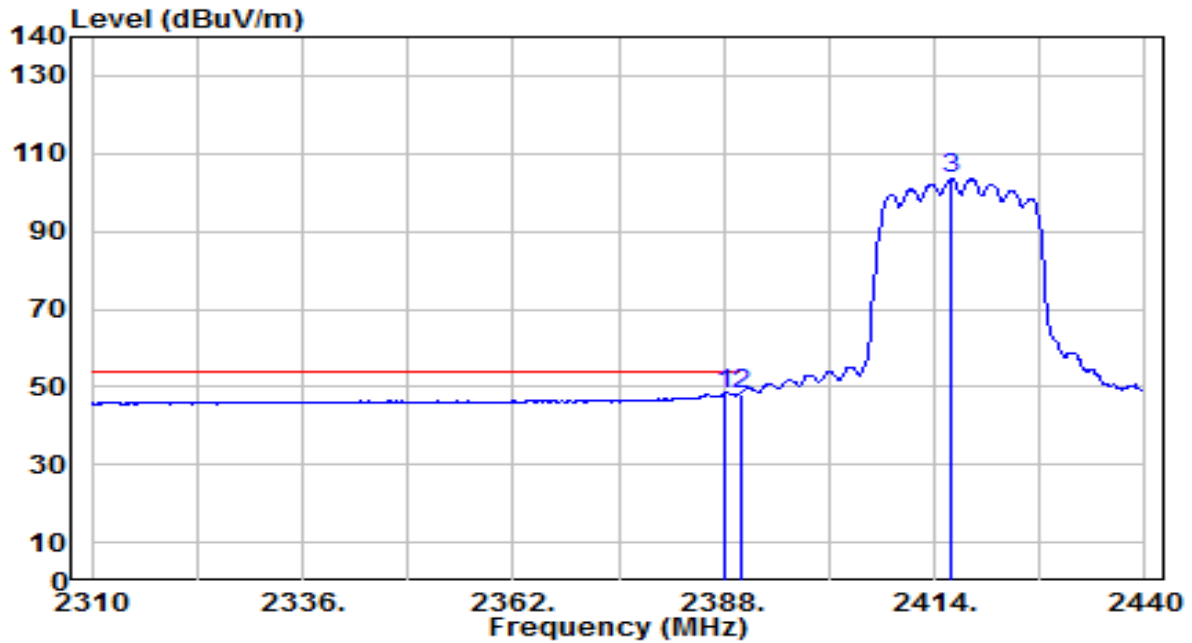


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	15.39	32.72	48.10	-5.90	54.00	230	115	Average
2	*	2390.000	15.56	32.73	48.29	-5.71	54.00	230	115	Average
3		2415.950	70.63	32.83	103.46	N/A	N/A	230	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

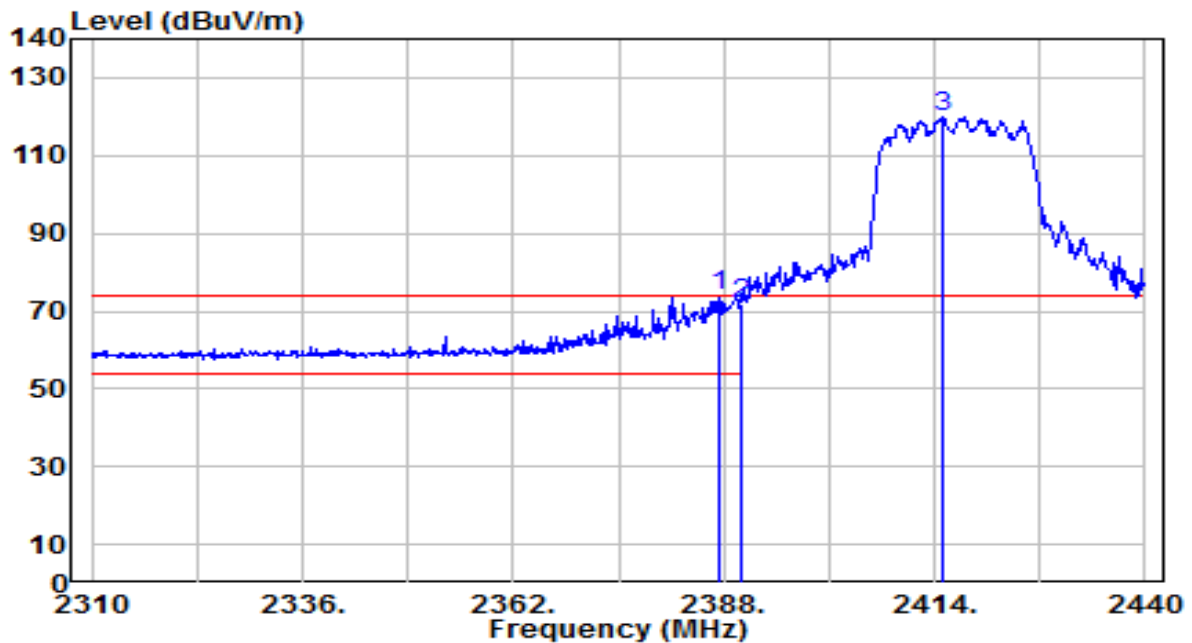


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.480	40.99	32.72	73.70	-0.30	74.00	190	75	Peak
2		2390.000	38.88	32.73	71.61	-2.39	74.00	190	75	Peak
3		2415.040	87.20	32.83	120.02	N/A	N/A	190	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

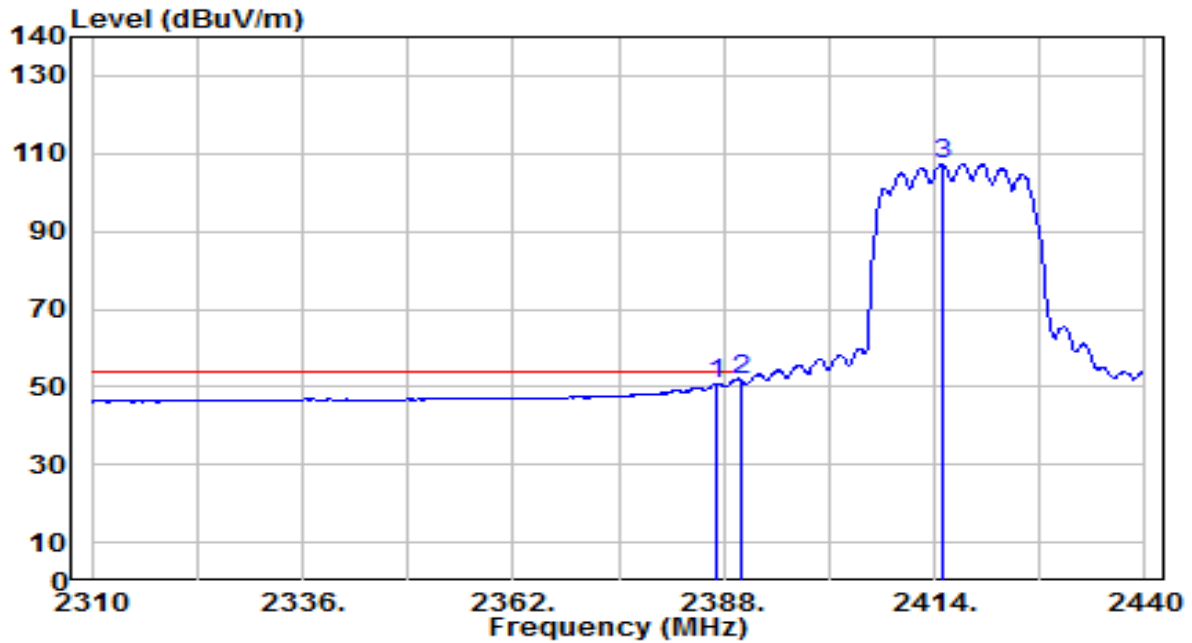


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2386.960	18.21	32.71	50.92	-3.08	54.00	190	75	Average
2	*	2390.000	19.23	32.73	51.95	-2.05	54.00	190	75	Average
3		2414.910	74.62	32.82	107.44	N/A	N/A	190	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

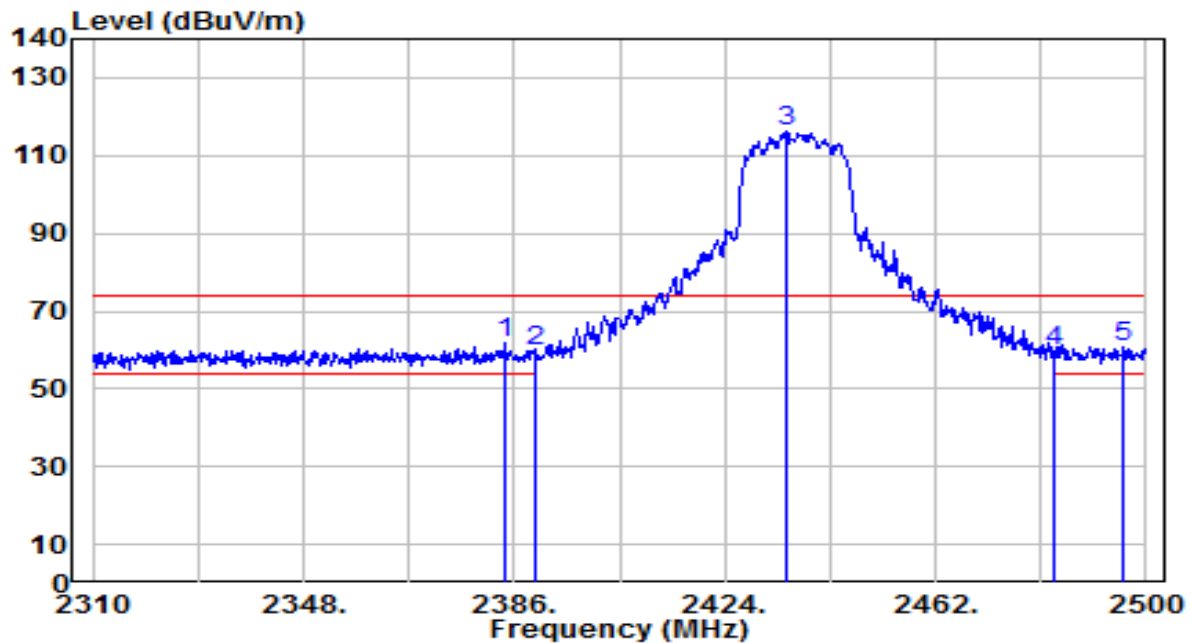


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.290	28.97	32.70	61.68	-12.32	74.00	230	125	Peak
2		2390.000	27.01	32.73	59.74	-14.26	74.00	230	125	Peak
3		2435.020	83.45	32.90	116.35	N/A	N/A	230	125	Peak
4		2483.500	26.59	33.09	59.69	-14.31	74.00	230	125	Peak
5		2496.010	27.61	33.14	60.75	-13.25	74.00	230	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

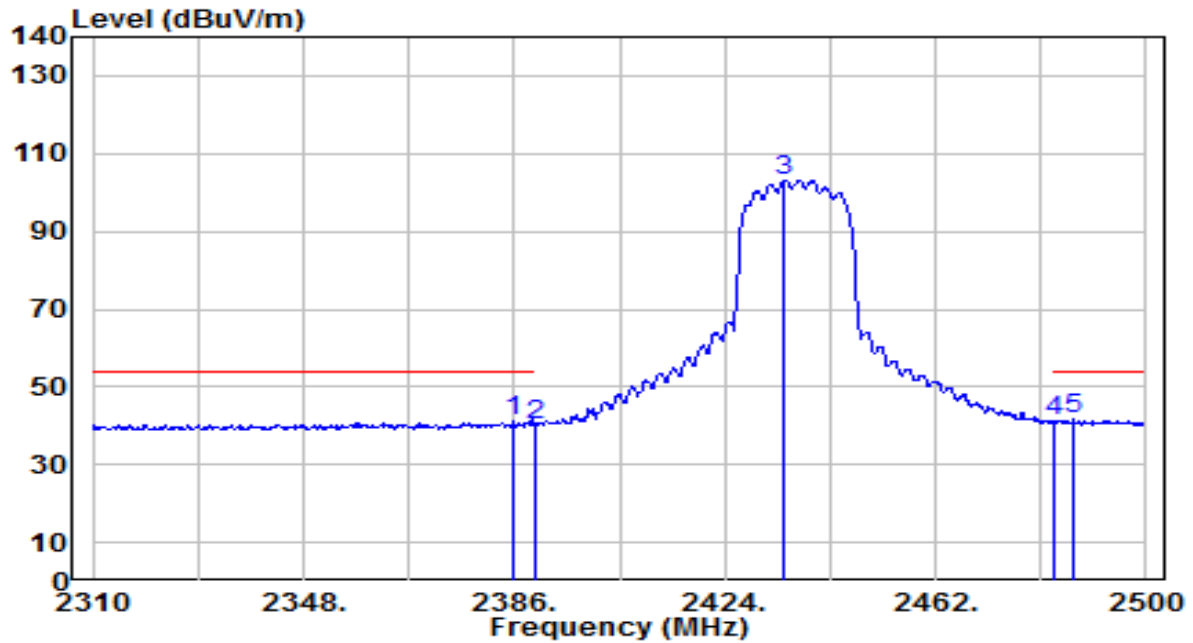


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.810	8.37	32.71	41.08	-12.92	54.00	230	125	Average
2	2390.000	7.58	32.73	40.30	-13.70	54.00	230	125	Average
3	2434.640	70.36	32.90	103.26	N/A	N/A	230	125	Average
4	2483.500	7.90	33.09	40.99	-13.01	54.00	230	125	Average
5	* 2487.080	8.40	33.11	41.51	-12.49	54.00	230	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

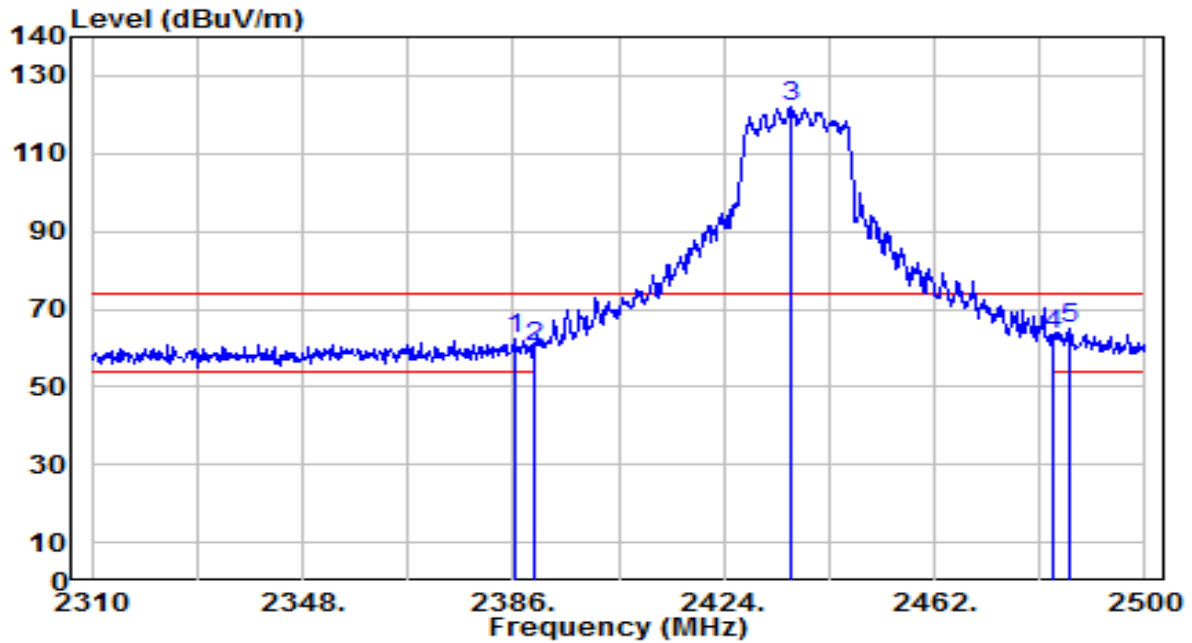


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.190	29.77	32.71	62.48	-11.52	74.00	150	75	Peak
2	2390.000	27.29	32.73	60.02	-13.98	74.00	150	75	Peak
3	2436.160	88.99	32.91	121.90	N/A	N/A	150	75	Peak
4	2483.500	30.44	33.09	63.54	-10.46	74.00	150	75	Peak
5	* 2486.510	32.09	33.11	65.20	-8.80	74.00	150	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

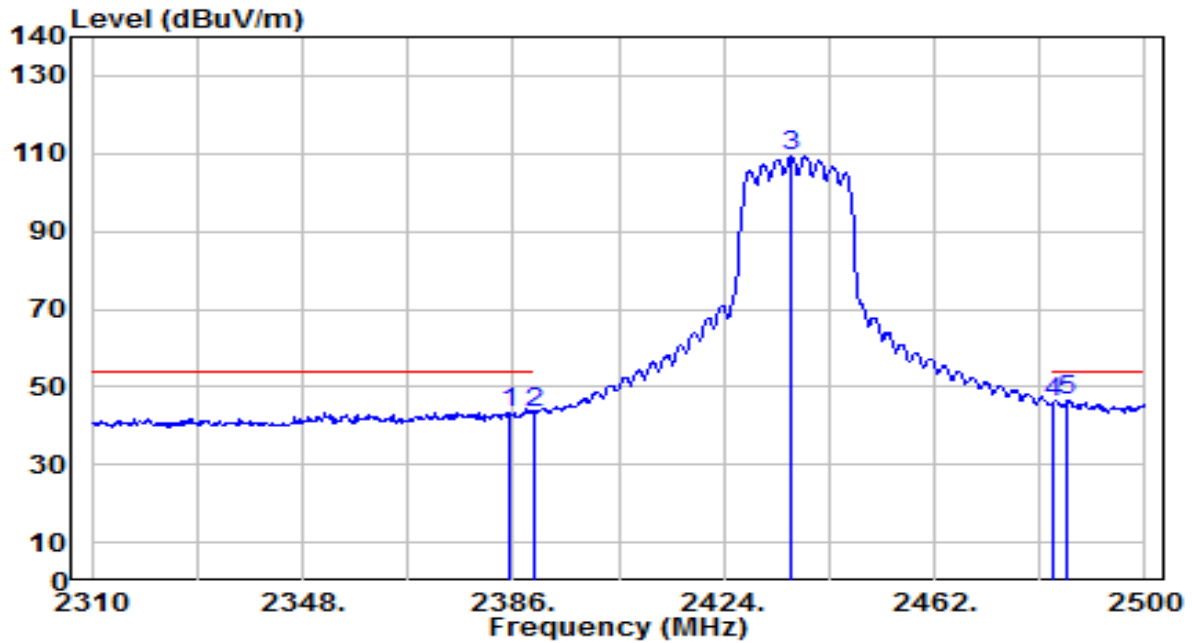


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.430	10.73	32.71	43.44	-10.56	54.00	150	75	Average
2	2390.000	10.76	32.73	43.48	-10.52	54.00	150	75	Average
3	2436.160	76.45	32.91	109.36	N/A	N/A	150	75	Average
4	2483.500	12.96	33.09	46.05	-7.95	54.00	150	75	Average
5	* 2486.130	13.31	33.11	46.41	-7.59	54.00	150	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

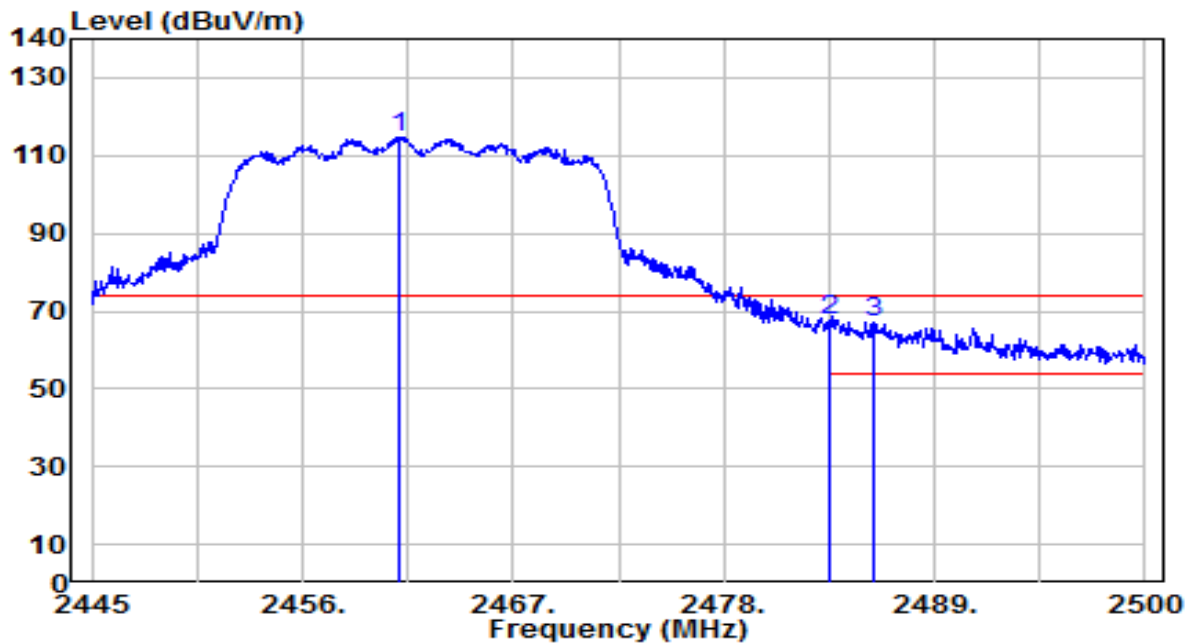


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2461.060	81.65	33.01	114.65	N/A	N/A	275	115	Peak
2	* 2483.500	34.31	33.09	67.41	-6.59	74.00	275	115	Peak
3	2485.810	33.92	33.10	67.02	-6.98	74.00	275	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

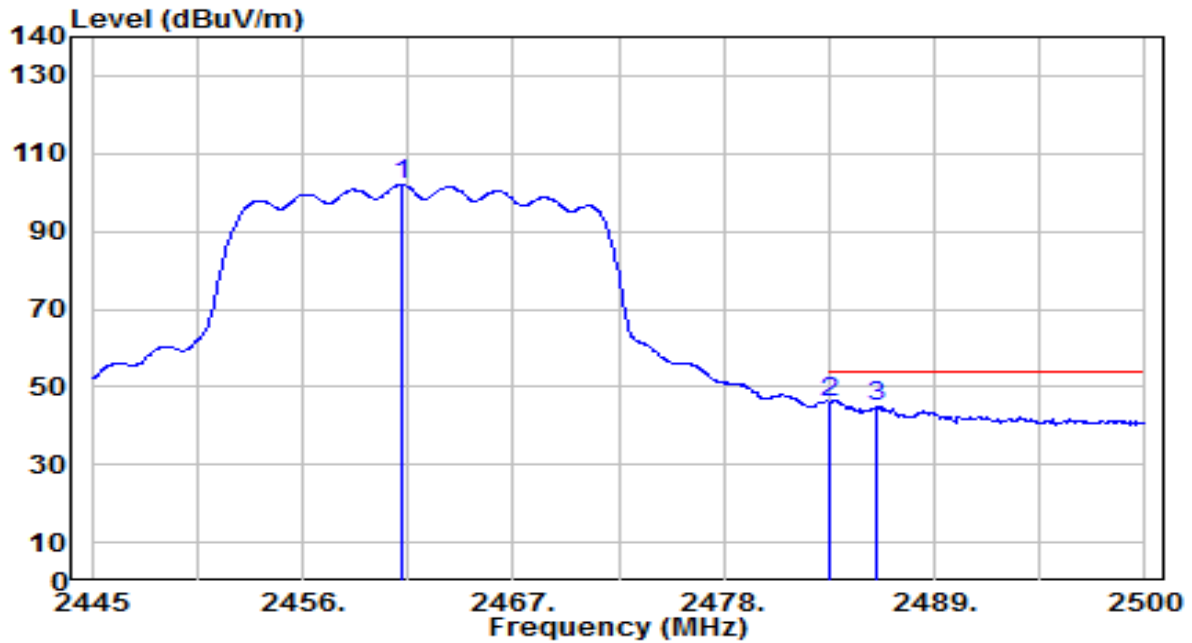


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2461.170	68.96	33.01	101.97	N/A	N/A	275	115	Average
2	*	2483.500	13.00	33.09	46.09	-7.91	54.00	275	115	Average
3		2485.975	11.92	33.10	45.02	-8.98	54.00	275	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

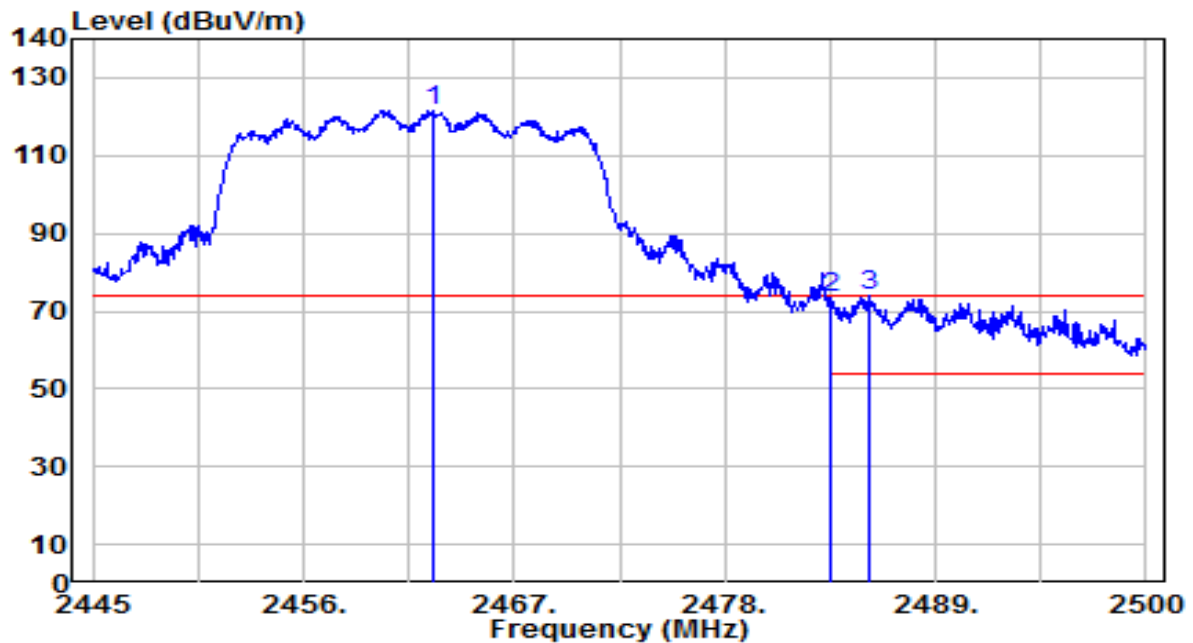


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.765	88.72	33.01	121.74	N/A	N/A	200	70	Peak
2	2483.500	40.36	33.09	73.46	-0.54	74.00	200	70	Peak
3	* 2485.535	40.74	33.10	73.84	-0.16	74.00	200	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

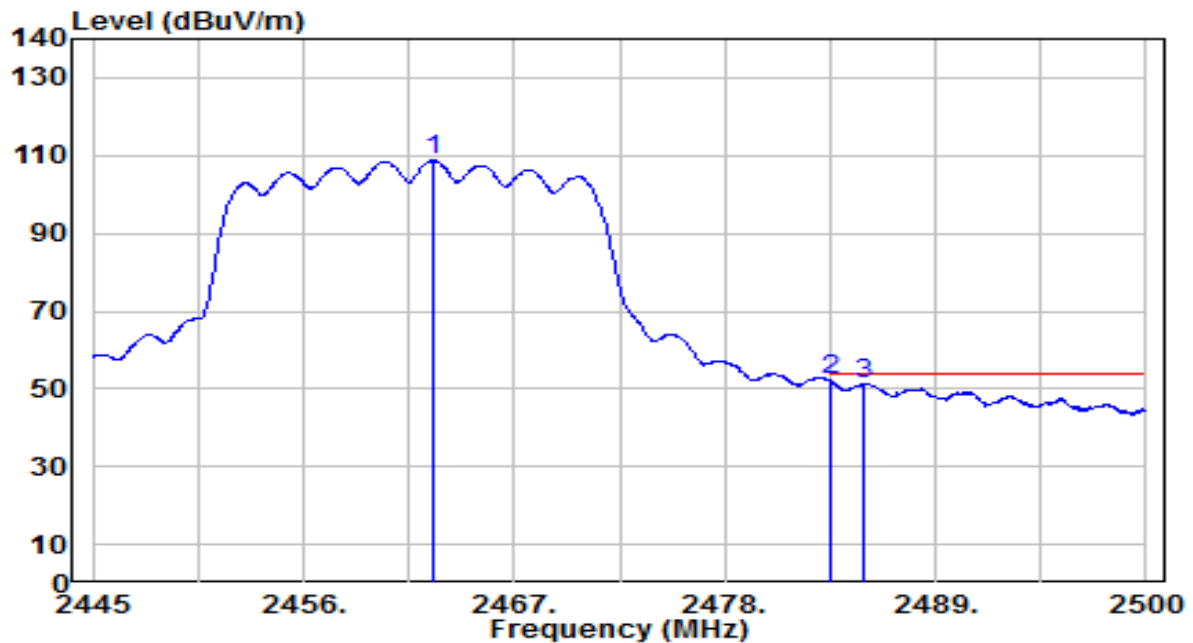


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2462.820	75.61	33.01	108.62	N/A	N/A	200	70	Average
2	*	2483.500	19.10	33.09	52.19	-1.81	54.00	200	70	Average
3		2485.205	18.30	33.10	51.40	-2.60	54.00	200	70	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

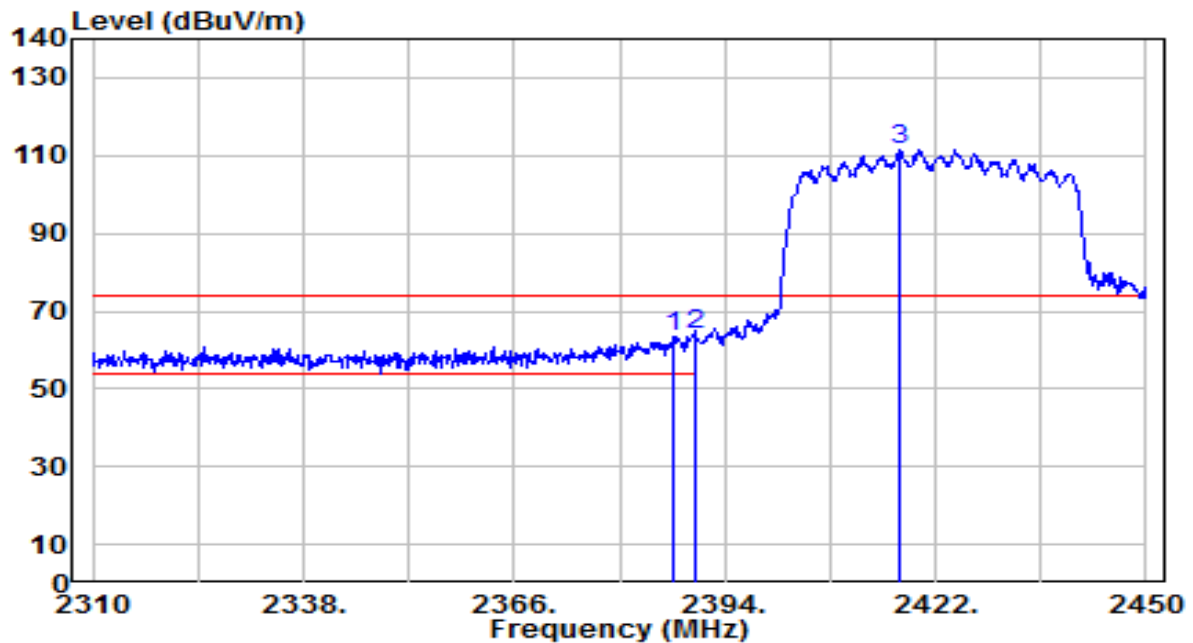


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.280	30.92	32.72	63.63	-10.37	74.00	230	115	Peak
2	*	2390.000	31.38	32.73	64.10	-9.90	74.00	230	115	Peak
3		2417.380	78.81	32.83	111.65	N/A	N/A	230	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

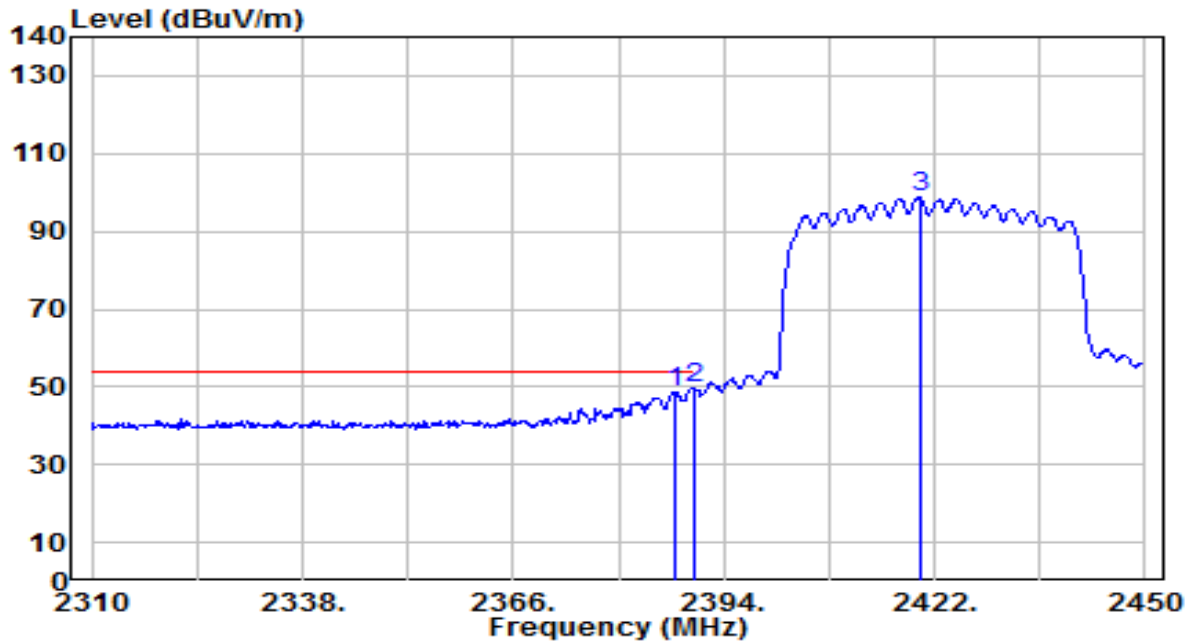


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.420	16.06	32.72	48.78	-5.22	54.00	230	115	Average
2	*	2390.000	16.76	32.73	49.49	-4.51	54.00	230	115	Average
3		2420.040	65.97	32.84	98.82	N/A	N/A	230	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

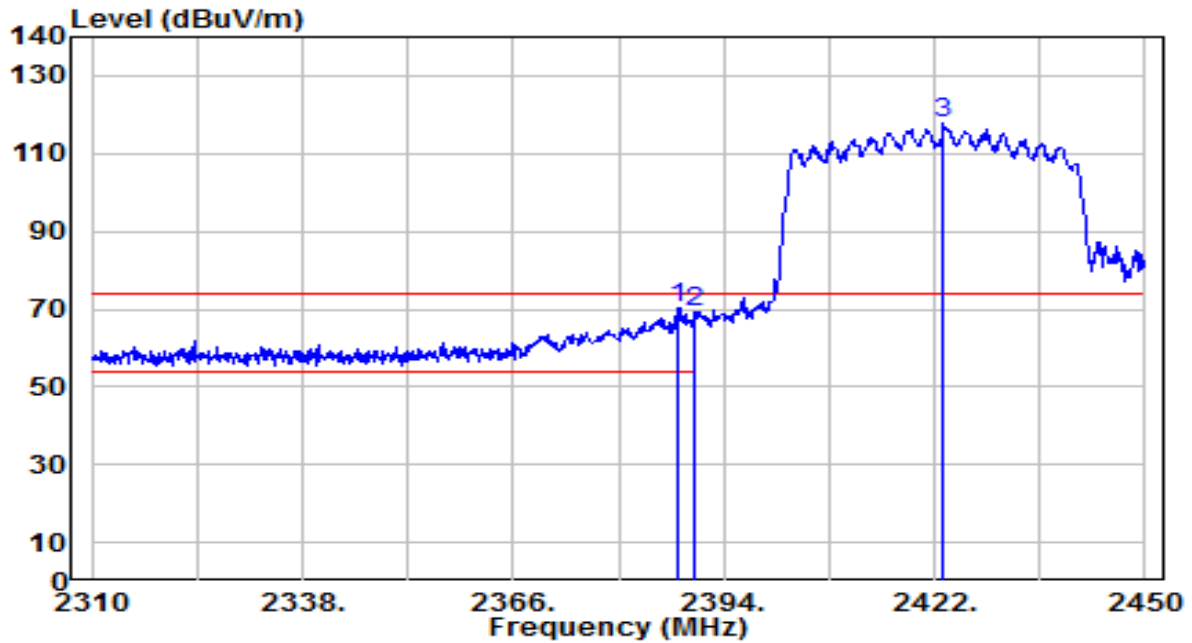


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.980	37.30	32.72	70.02	-3.98	74.00	190	75	Peak
2		2390.000	36.29	32.73	69.02	-4.98	74.00	190	75	Peak
3		2423.260	84.72	32.86	117.58	N/A	N/A	190	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

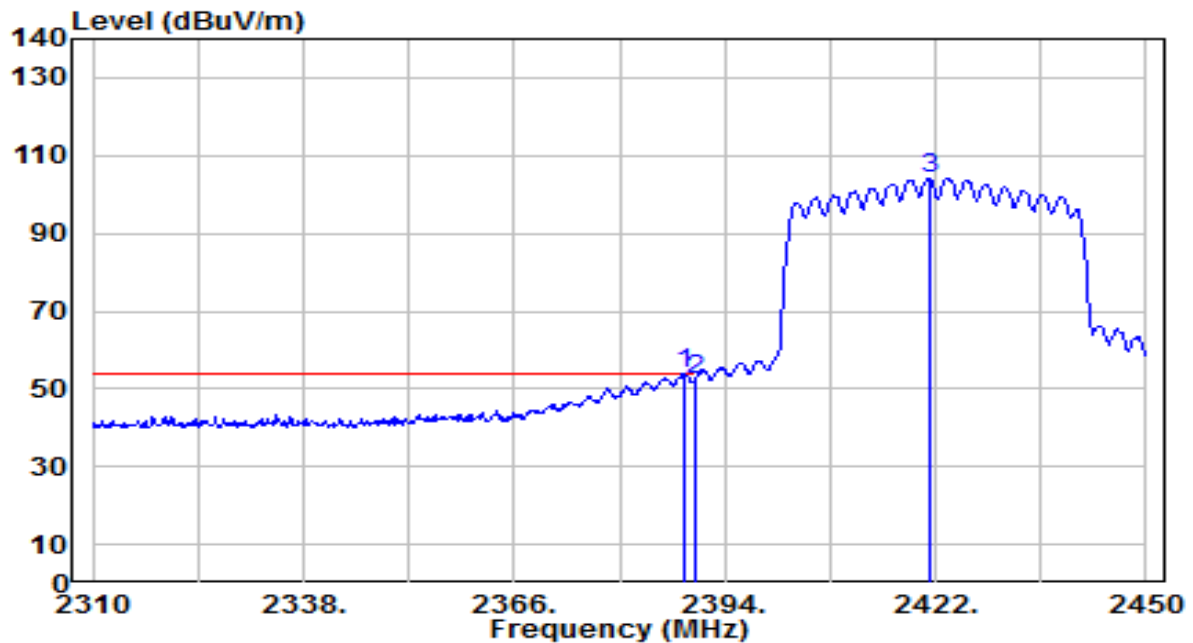


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.540	21.00	32.72	53.72	-0.28	54.00	190	75	Average
2		2390.000	19.41	32.73	52.14	-1.86	54.00	190	75	Average
3		2421.160	71.45	32.85	104.30	N/A	N/A	190	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

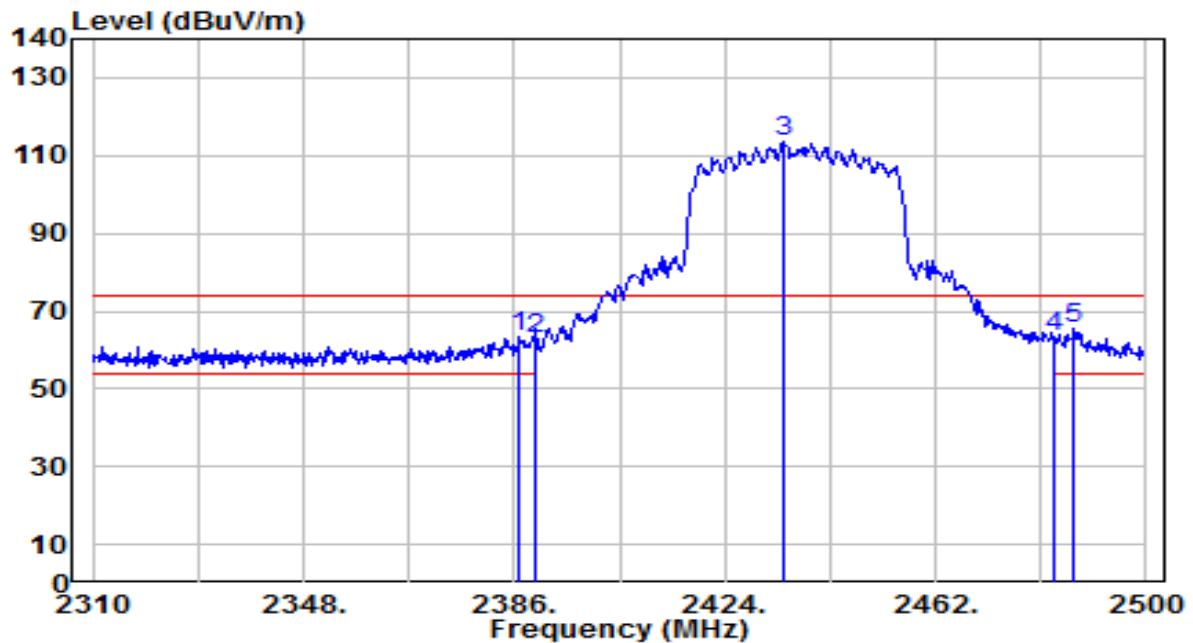


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	30.67	32.71	63.38	-10.62	74.00	230	125	Peak
2	2390.000	29.99	32.73	62.71	-11.29	74.00	230	125	Peak
3	2434.450	80.58	32.90	113.48	N/A	N/A	230	125	Peak
4	2483.500	30.41	33.09	63.50	-10.50	74.00	230	125	Peak
5	* 2487.080	32.36	33.11	65.47	-8.53	74.00	230	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

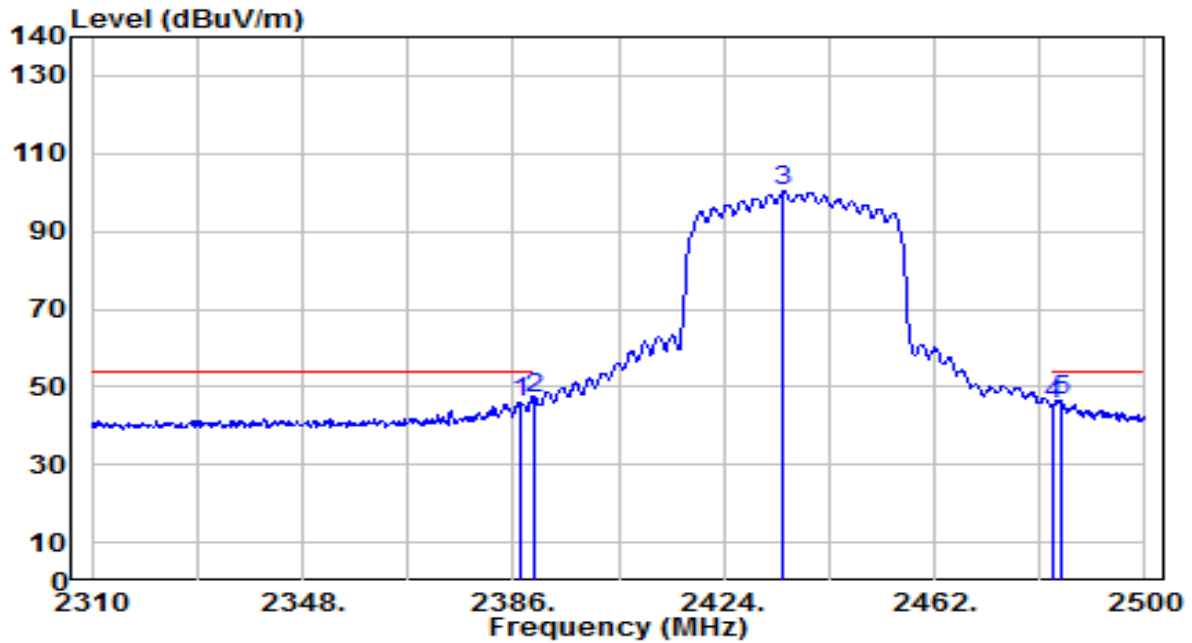


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.140	13.49	32.72	46.21	-7.79	54.00	230	125	Average
2	*	2390.000	14.23	32.73	46.96	-7.04	54.00	230	125	Average
3		2434.640	67.44	32.90	100.34	N/A	N/A	230	125	Average
4		2483.500	12.58	33.09	45.67	-8.33	54.00	230	125	Average
5		2484.800	13.45	33.10	46.55	-7.45	54.00	230	125	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

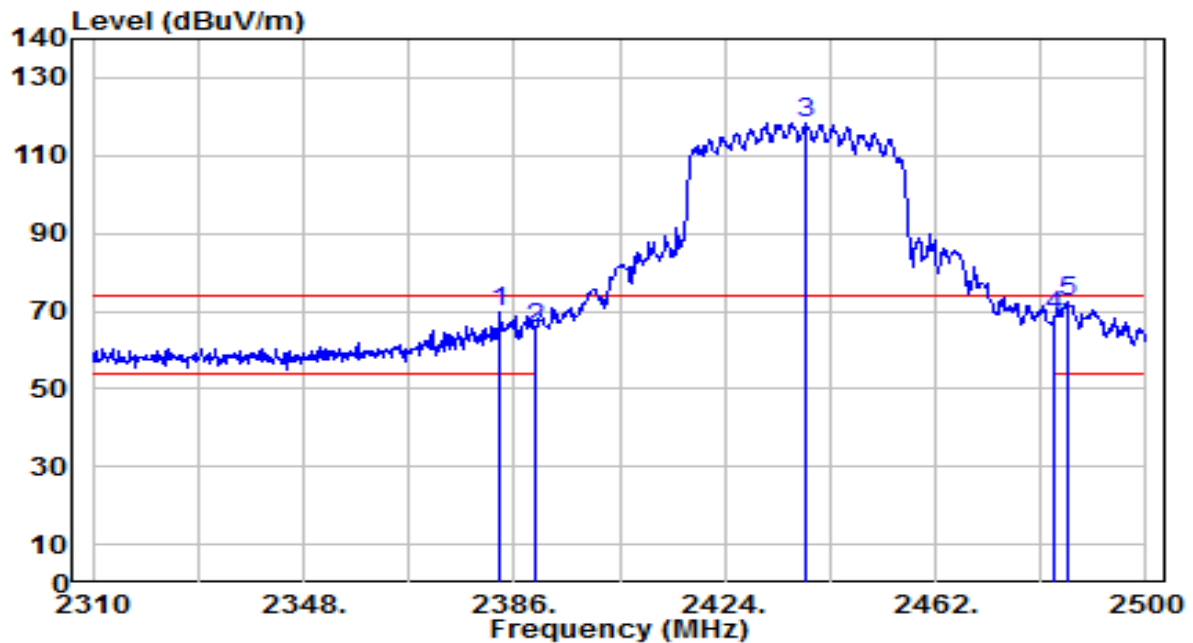


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2383.530	37.03	32.70	69.73	-4.27	74.00	150	75	Peak
2	2390.000	33.03	32.73	65.76	-8.24	74.00	150	75	Peak
3	2438.630	85.68	32.92	118.60	N/A	N/A	150	75	Peak
4	2483.500	35.59	33.09	68.68	-5.32	74.00	150	75	Peak
5	* 2485.750	39.08	33.10	72.19	-1.81	74.00	150	75	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

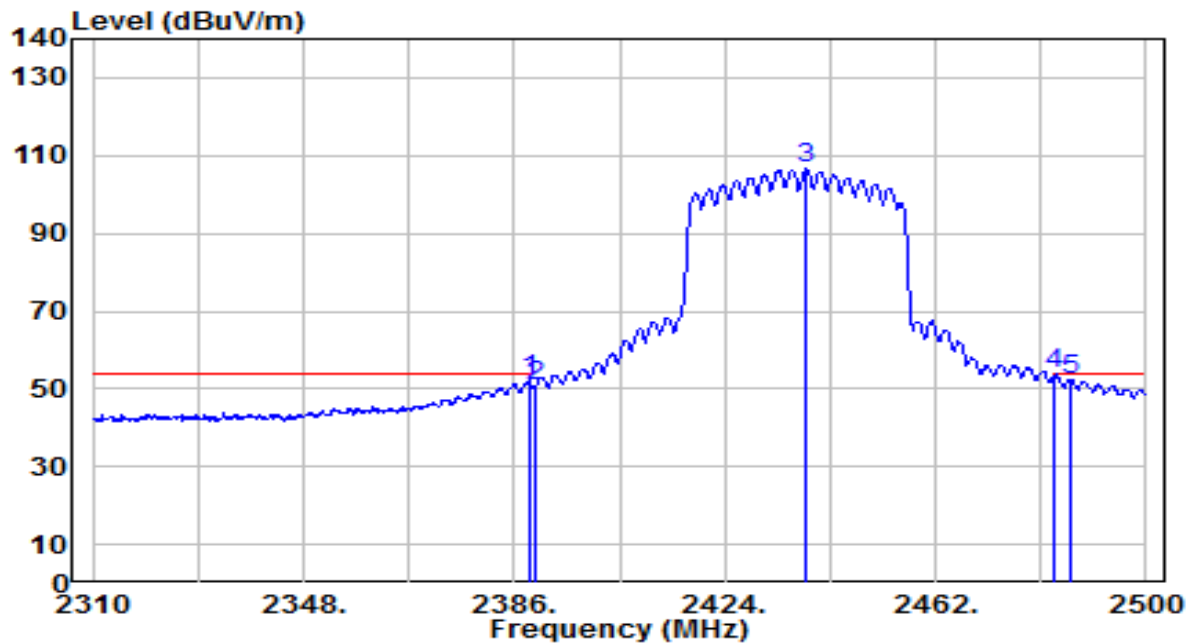


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.660	19.43	32.72	52.15	-1.85	54.00	150	75	Average
2	2390.000	17.84	32.73	50.56	-3.44	54.00	150	75	Average
3	2438.630	73.58	32.92	106.49	N/A	N/A	150	75	Average
4	* 2483.500	20.70	33.09	53.80	-0.20	54.00	150	75	Average
5	2486.320	19.28	33.11	52.39	-1.61	54.00	150	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

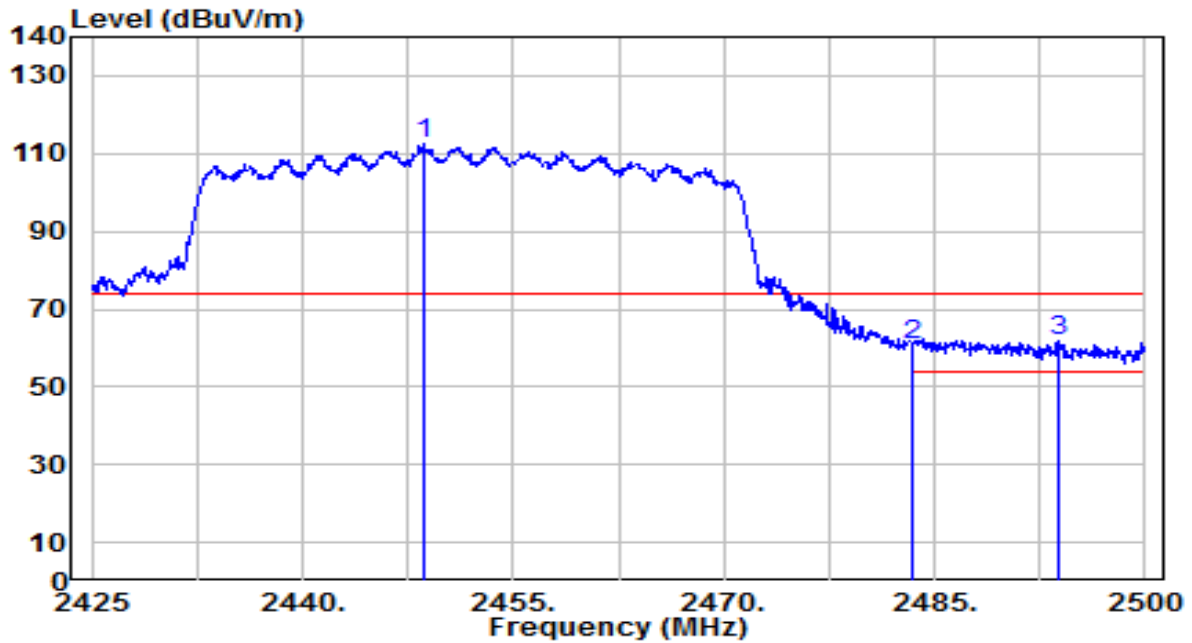


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2448.700	79.35	32.96	112.31	N/A	N/A	275	115	Peak
2	2483.500	27.79	33.09	60.88	-13.12	74.00	275	115	Peak
3	* 2493.925	28.88	33.14	62.02	-11.98	74.00	275	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

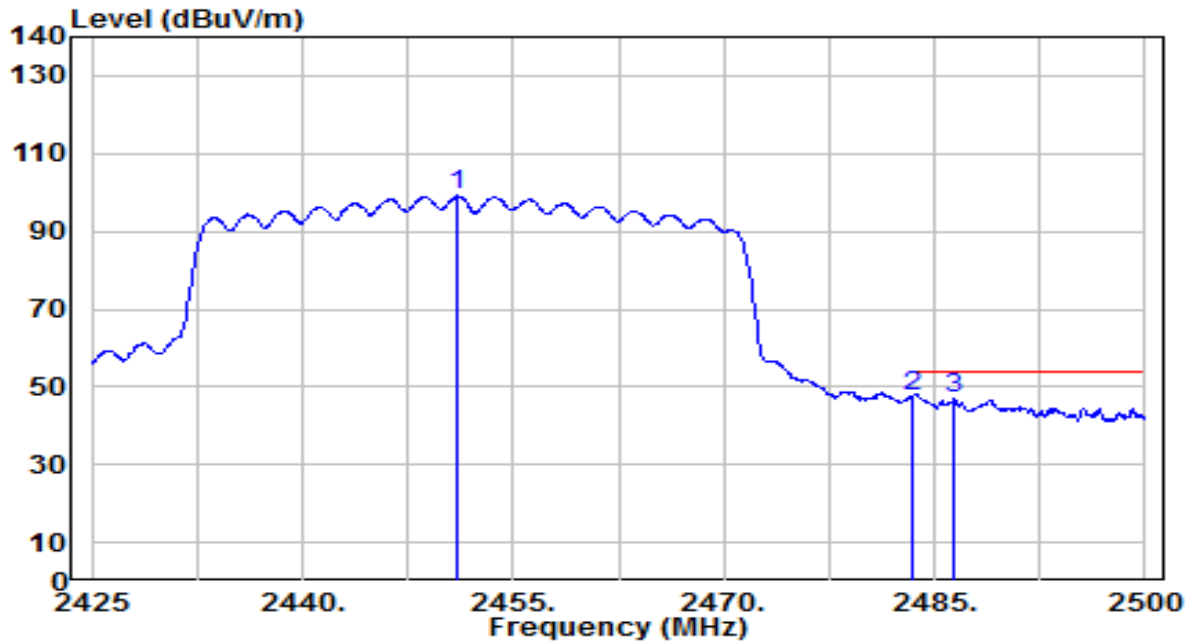


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2451.025	66.26	32.97	99.23	N/A	N/A	275	115	Average
2	*	2483.500	14.38	33.09	47.47	-6.53	54.00	275	115	Average
3		2486.425	13.75	33.11	46.86	-7.14	54.00	275	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

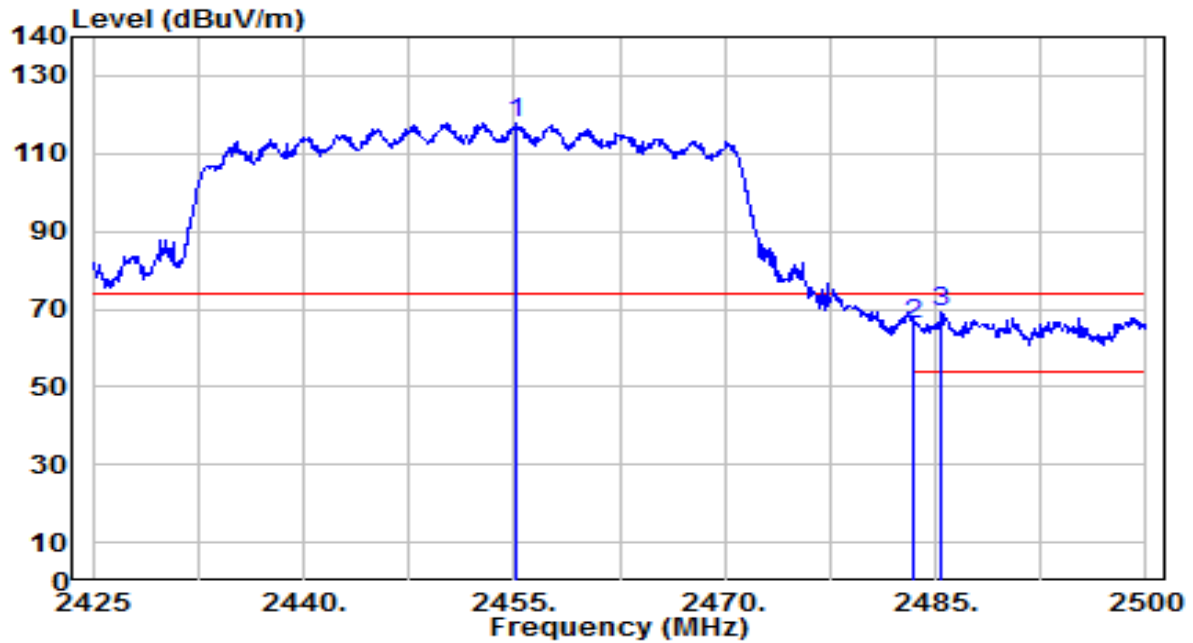


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.225	85.06	32.98	118.04	N/A	N/A	200	70	Peak
2	2483.500	32.92	33.09	66.02	-7.98	74.00	200	70	Peak
3	* 2485.375	36.24	33.10	69.35	-4.65	74.00	200	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11ax-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

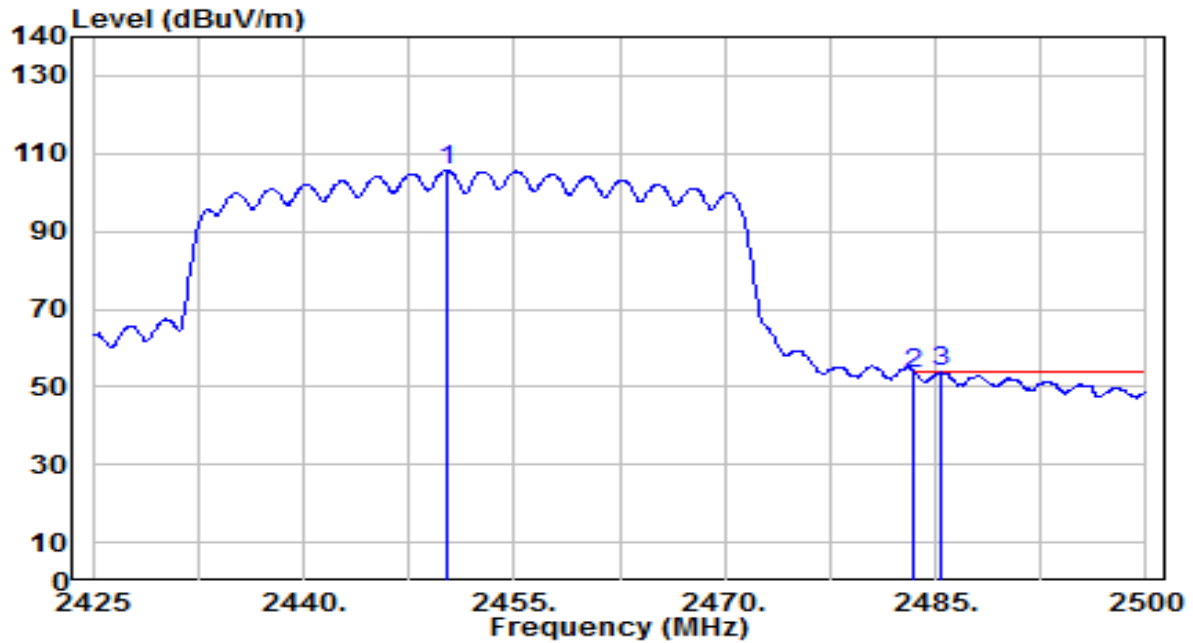


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.200	72.87	32.96	105.83	N/A	N/A	200	70	Average
2	2483.500	20.50	33.09	53.60	-0.40	54.00	200	70	Average
3	* 2485.450	20.61	33.10	53.71	-0.29	54.00	200	70	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

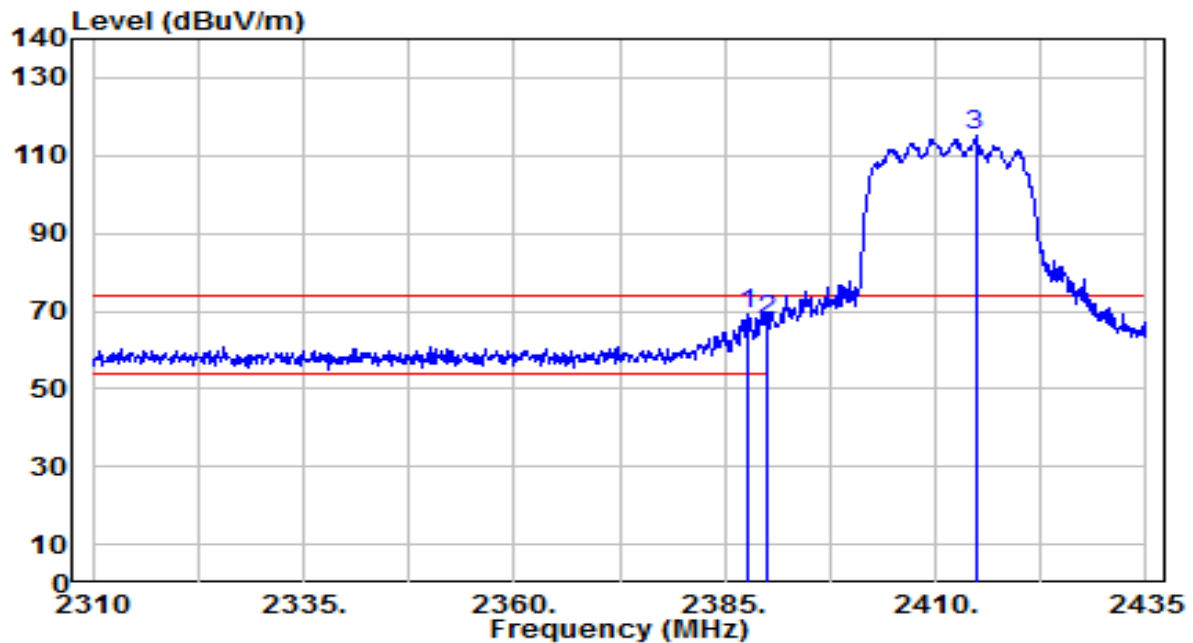


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.875	36.50	32.72	69.22	-4.78	74.00	230	115	Peak
2		2390.000	34.65	32.73	67.38	-6.62	74.00	230	115	Peak
3		2414.750	82.17	32.82	114.99	N/A	N/A	230	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

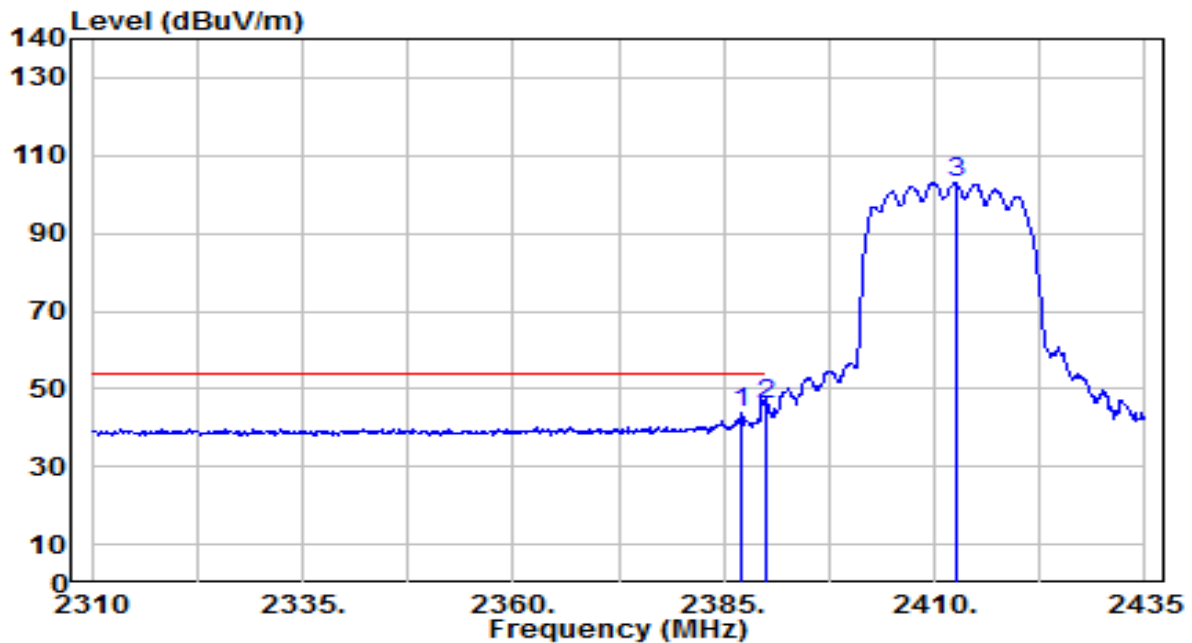


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.125	11.04	32.72	43.75	-10.25	54.00	230	115	Average
2	* 2390.000	13.13	32.73	45.86	-8.14	54.00	230	115	Average
3	2412.500	70.35	32.82	103.17	N/A	N/A	230	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

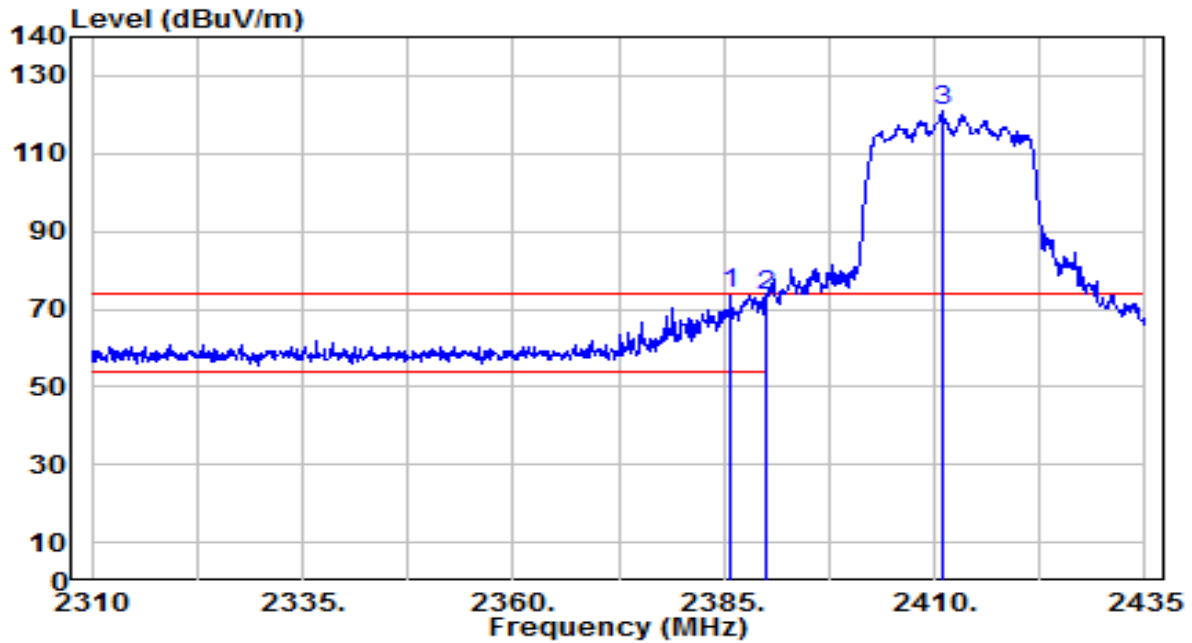


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.750	41.01	32.71	73.72	-0.28	74.00	215	85	Peak
2		2390.000	40.75	32.73	73.47	-0.53	74.00	215	85	Peak
3		2410.875	87.98	32.81	120.79	N/A	N/A	215	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

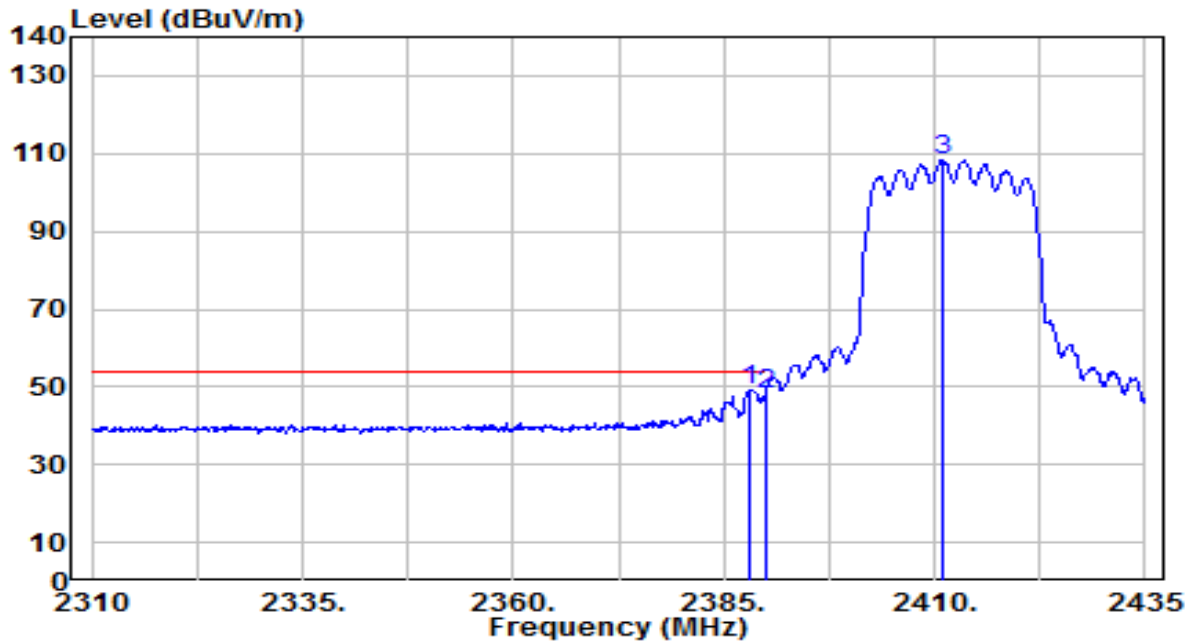


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	16.47	32.72	49.19	-4.81	54.00	215	85	Average
2		2390.000	15.20	32.73	47.93	-6.07	54.00	215	85	Average
3		2411.000	75.57	32.81	108.38	N/A	N/A	215	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

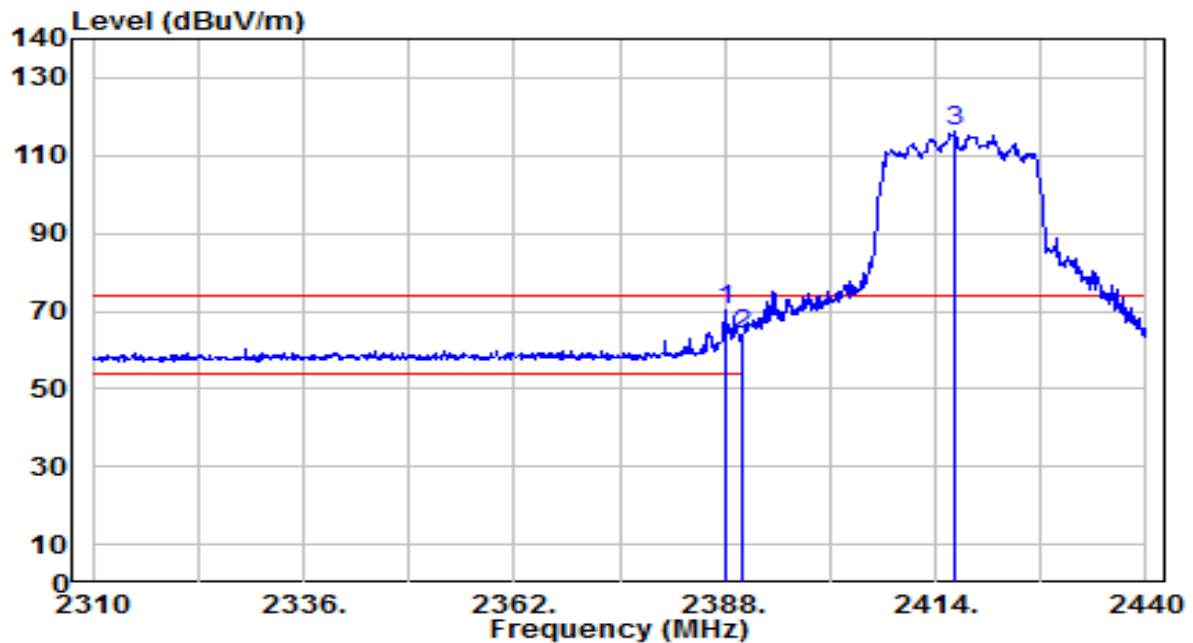


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	37.69	32.72	70.40	-3.60	74.00	230	115	Peak
2		2390.000	30.99	32.73	63.72	-10.28	74.00	230	115	Peak
3		2416.340	83.57	32.83	116.40	N/A	N/A	230	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

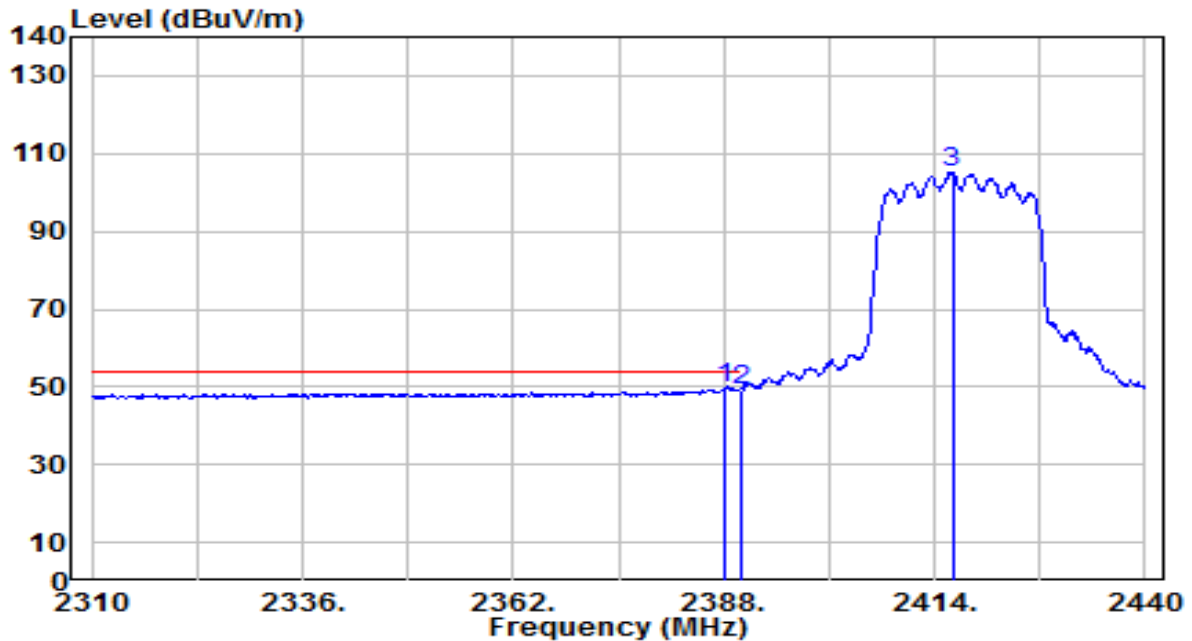


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	16.77	32.72	49.49	-4.51	54.00	230	115	Average
2		2390.000	16.45	32.73	49.18	-4.82	54.00	230	115	Average
3		2416.210	72.20	32.83	105.03	N/A	N/A	230	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

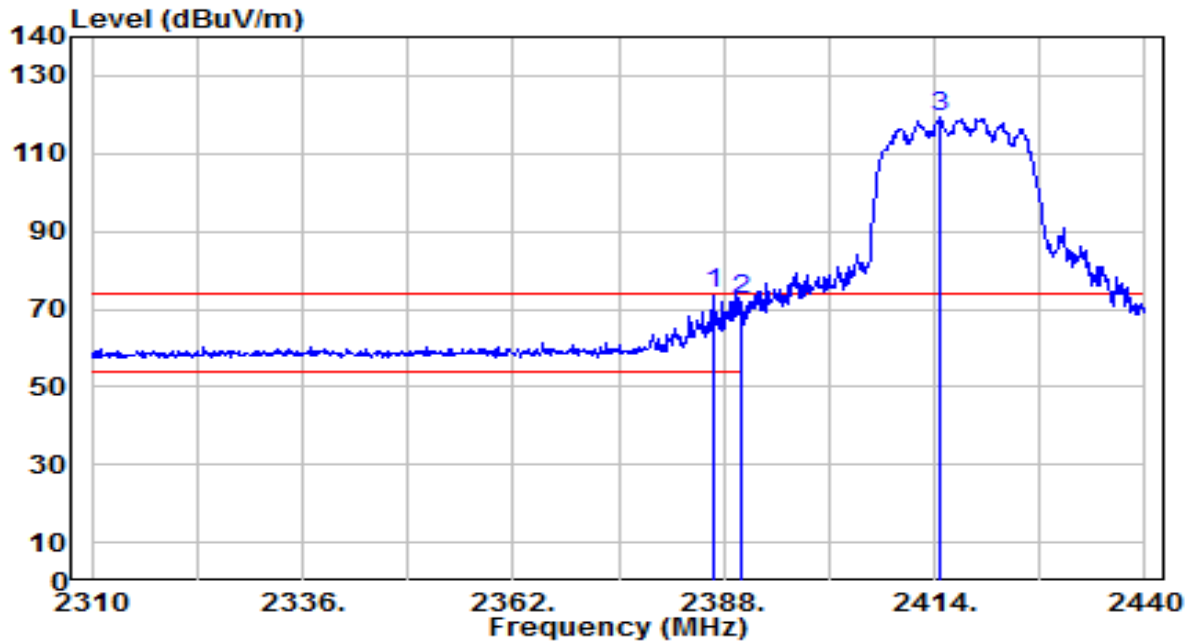


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.700	40.99	32.71	73.71	-0.29	74.00	215	85	Peak
2		2390.000	39.74	32.73	72.46	-1.54	74.00	215	85	Peak
3		2414.520	86.37	32.82	119.20	N/A	N/A	215	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-03
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 2_ANT 0+1	Test Voltage	AC 120V/60Hz

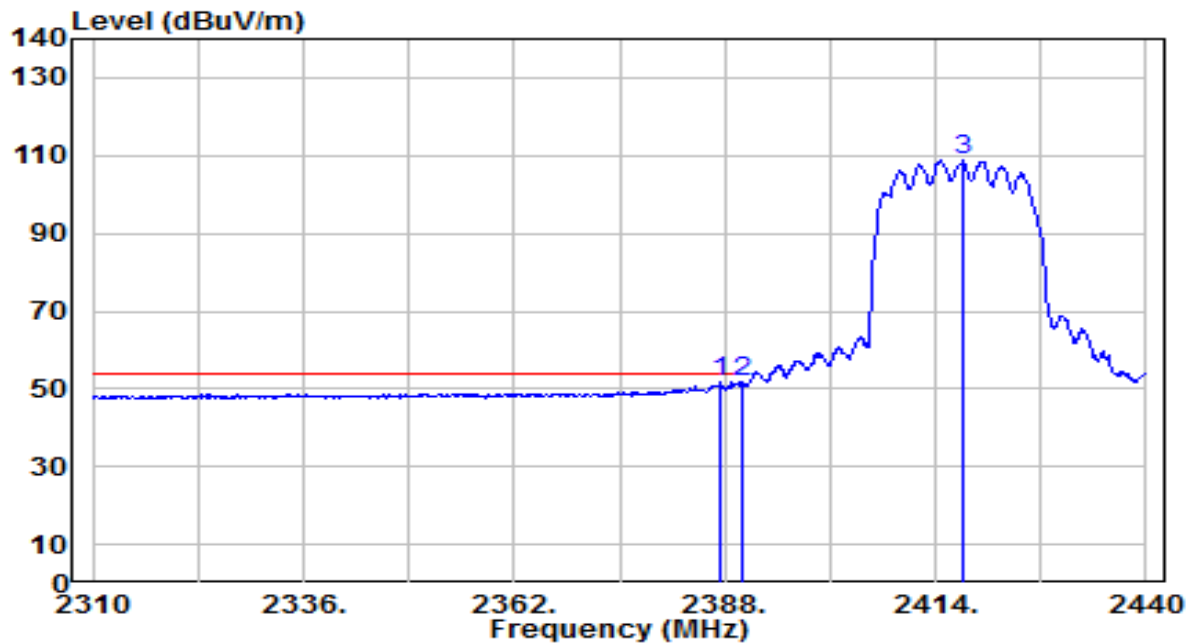


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.480	18.85	32.72	51.57	-2.43	54.00	215	85	Average
2	*	2390.000	19.30	32.73	52.03	-1.97	54.00	215	85	Average
3		2417.380	75.86	32.83	108.70	N/A	N/A	215	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

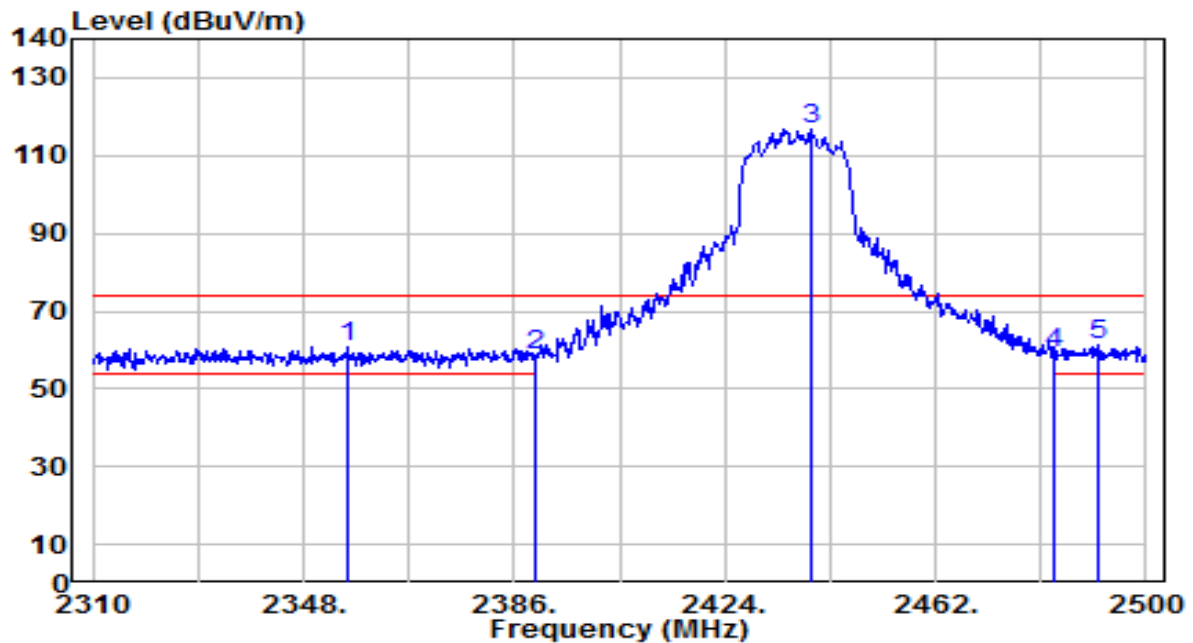


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2355.790	28.15	32.59	60.74	-13.26	74.00	230	125	Peak
2	2390.000	25.67	32.73	58.40	-15.60	74.00	230	125	Peak
3	2439.390	83.80	32.92	116.72	N/A	N/A	230	125	Peak
4	2483.500	26.32	33.09	59.41	-14.59	74.00	230	125	Peak
5	* 2491.260	28.42	33.13	61.54	-12.46	74.00	230	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

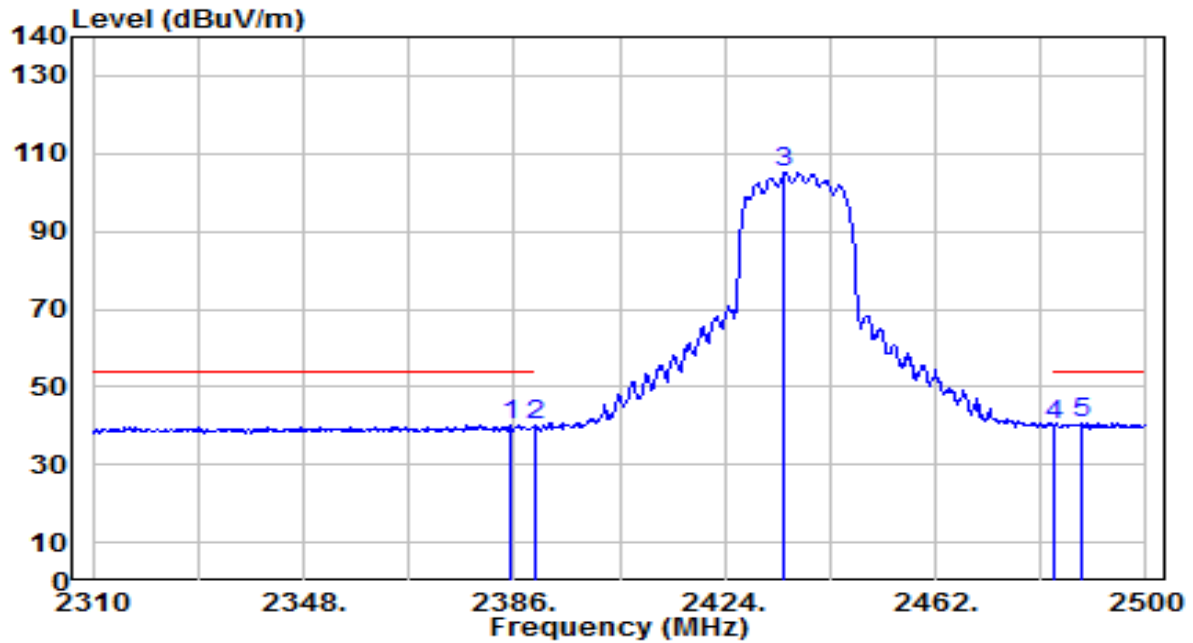


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.240	7.58	32.71	40.29	-13.71	54.00	230	125	Average
2	2390.000	7.49	32.73	40.22	-13.78	54.00	230	125	Average
3	2434.830	72.40	32.90	105.30	N/A	N/A	230	125	Average
4	2483.500	6.92	33.09	40.02	-13.98	54.00	230	125	Average
5	* 2488.600	7.73	33.12	40.84	-13.16	54.00	230	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

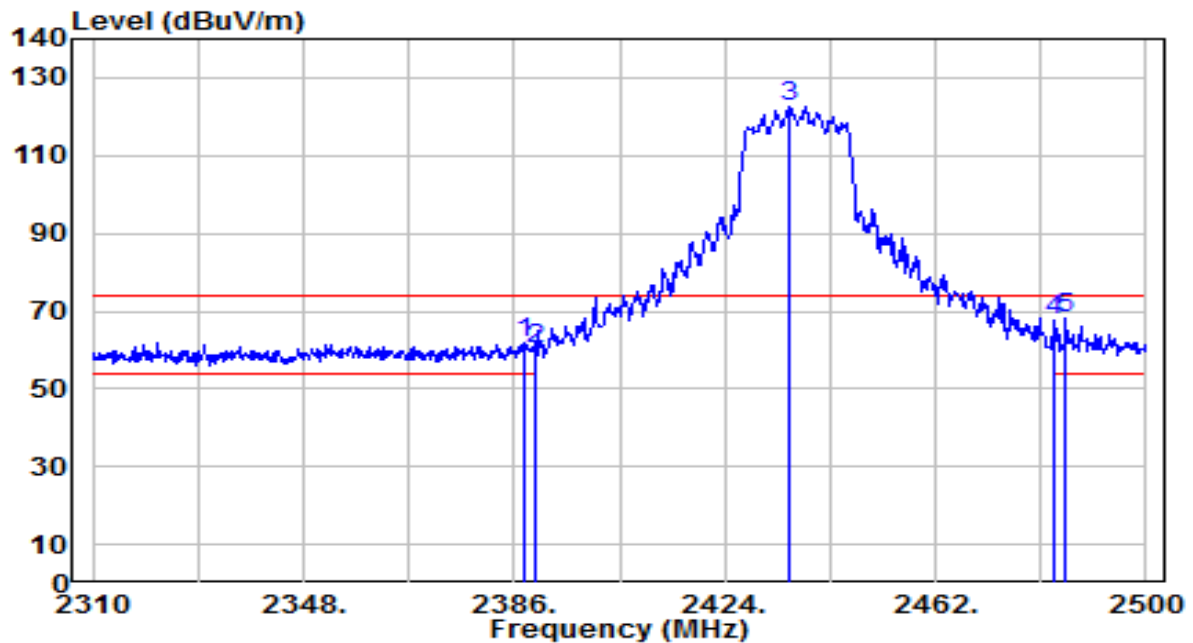


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	29.12	32.72	61.84	-12.16	74.00	145	95	Peak
2	2390.000	27.66	32.73	60.39	-13.61	74.00	145	95	Peak
3	2435.590	89.78	32.91	122.68	N/A	N/A	145	95	Peak
4	2483.500	34.28	33.09	67.37	-6.63	74.00	145	95	Peak
5	* 2485.560	35.08	33.10	68.18	-5.82	74.00	145	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

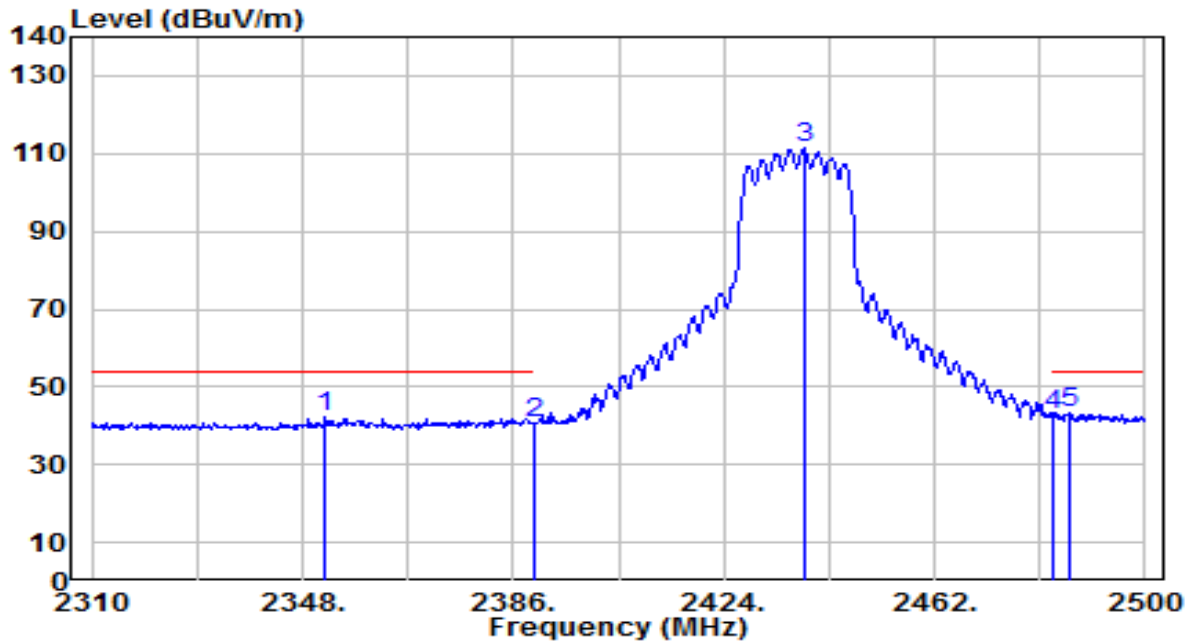


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2352.180	9.51	32.58	42.09	-11.91	54.00	145	95	Average
2	2390.000	8.16	32.73	40.89	-13.11	54.00	145	95	Average
3	2438.440	78.58	32.92	111.50	N/A	N/A	145	95	Average
4	2483.500	9.86	33.09	42.96	-11.04	54.00	145	95	Average
5	* 2486.510	9.99	33.11	43.09	-10.91	54.00	145	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

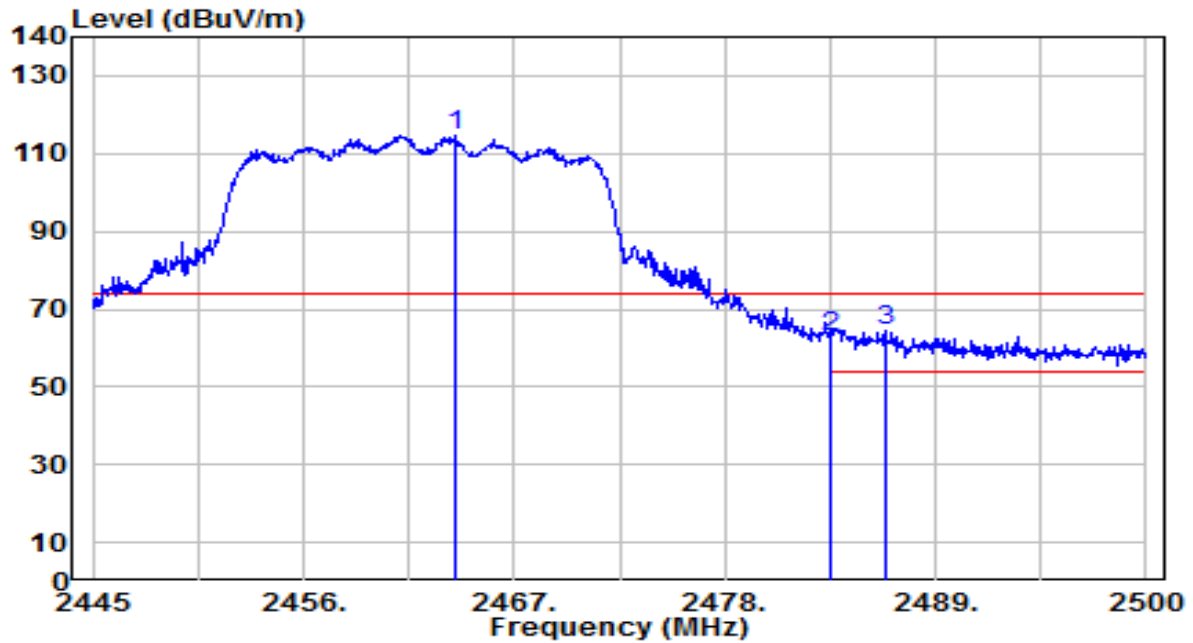


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2463.865	81.54	33.02	114.56	N/A	N/A	275	115	Peak
2	2483.500	29.71	33.09	62.81	-11.19	74.00	275	115	Peak
3	* 2486.360	31.22	33.11	64.33	-9.67	74.00	275	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

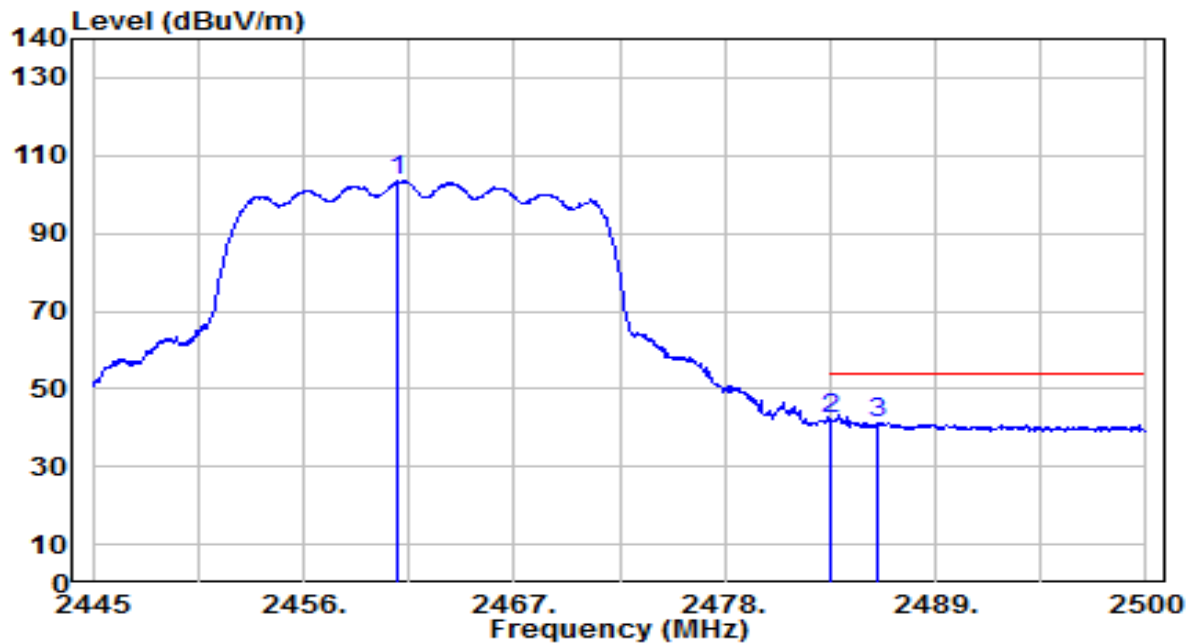


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.950	70.39	33.01	103.40	N/A	N/A	275	115	Average
2	*	2483.500	9.09	33.09	42.19	-11.81	54.00	275	115	Average
3		2486.030	8.33	33.10	41.44	-12.56	54.00	275	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

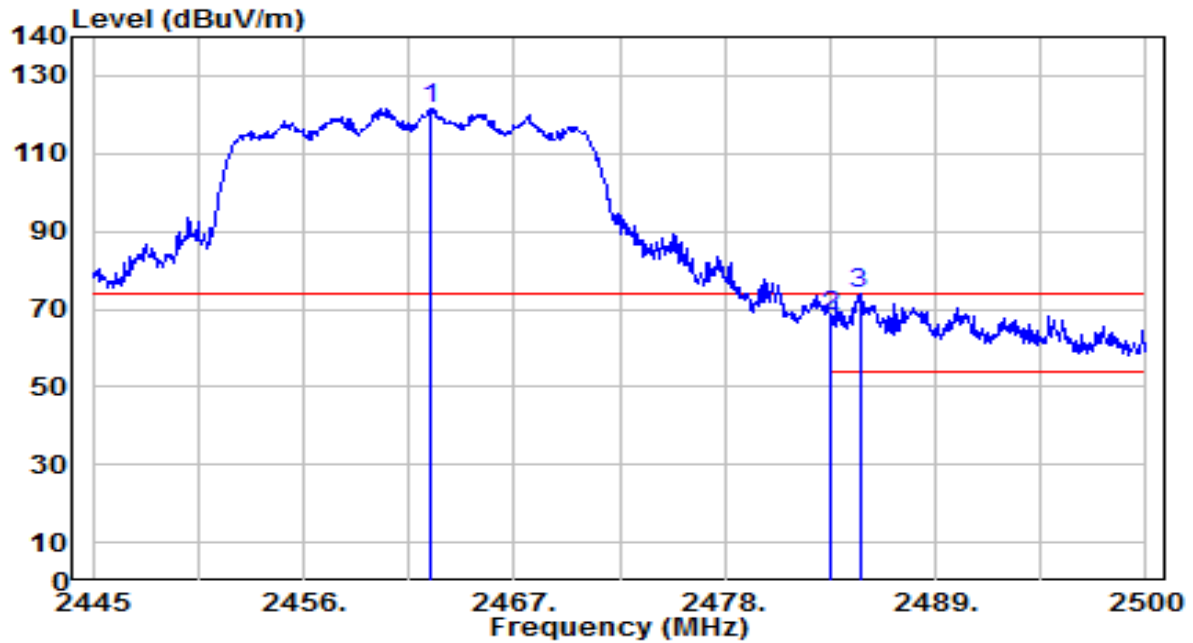


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.655	88.65	33.01	121.66	N/A	N/A	210	75	Peak
2	2483.500	35.17	33.09	68.26	-5.74	74.00	210	75	Peak
3	* 2485.040	40.61	33.10	73.71	-0.29	74.00	210	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-20MHz_TX_CH 11_ANT 0+1	Test Voltage	AC 120V/60Hz

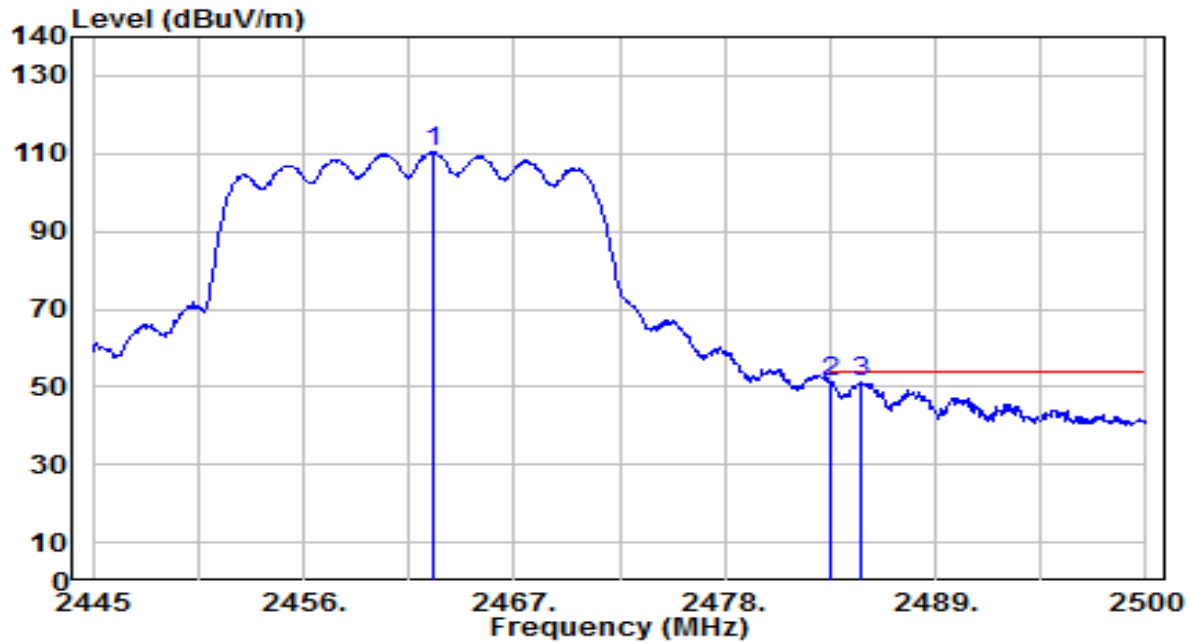


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.710	77.38	33.01	110.39	N/A	N/A	210	75	Average
2	* 2483.500	18.14	33.09	51.23	-2.77	54.00	210	75	Average
3	2485.150	18.13	33.10	51.23	-2.77	54.00	210	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

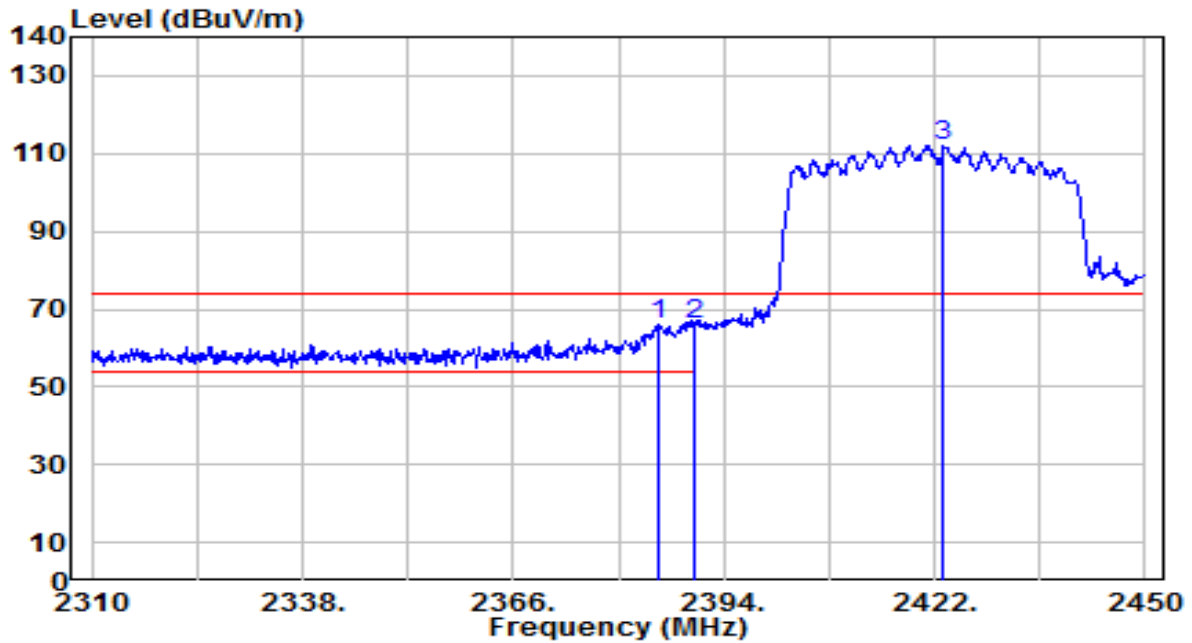


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.180	33.22	32.71	65.92	-8.08	74.00	230	115	Peak
2		2390.000	33.07	32.73	65.80	-8.20	74.00	230	115	Peak
3		2423.260	79.40	32.86	112.25	N/A	N/A	230	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

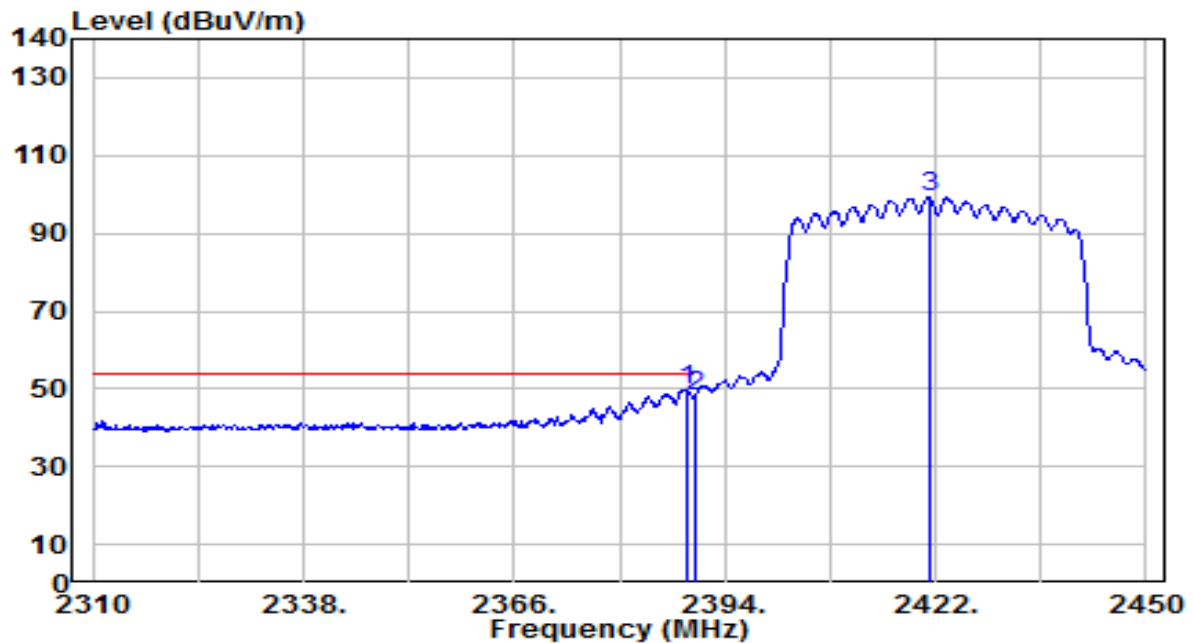


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.820	17.05	32.72	49.78	-4.22	54.00	230	115	Average
2		2390.000	15.11	32.73	47.83	-6.17	54.00	230	115	Average
3		2421.160	66.38	32.85	99.23	N/A	N/A	230	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

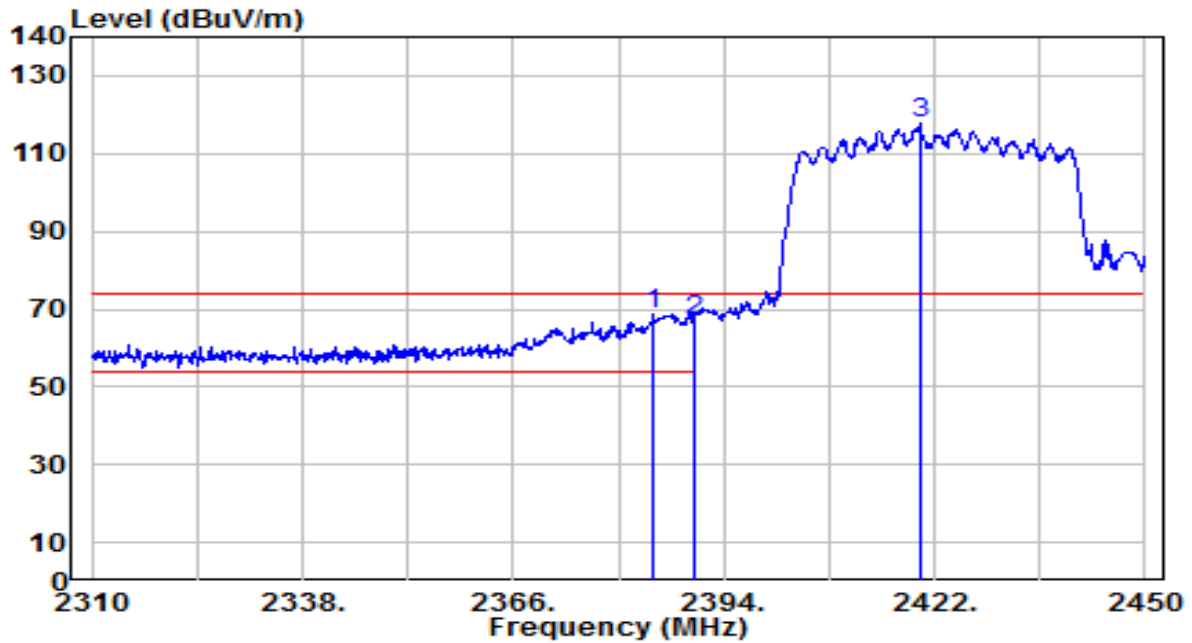


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2384.760	36.12	32.71	68.83	-5.17	74.00	215	85	Peak
2		2390.000	34.61	32.73	67.34	-6.66	74.00	215	85	Peak
3		2420.040	84.79	32.84	117.64	N/A	N/A	215	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

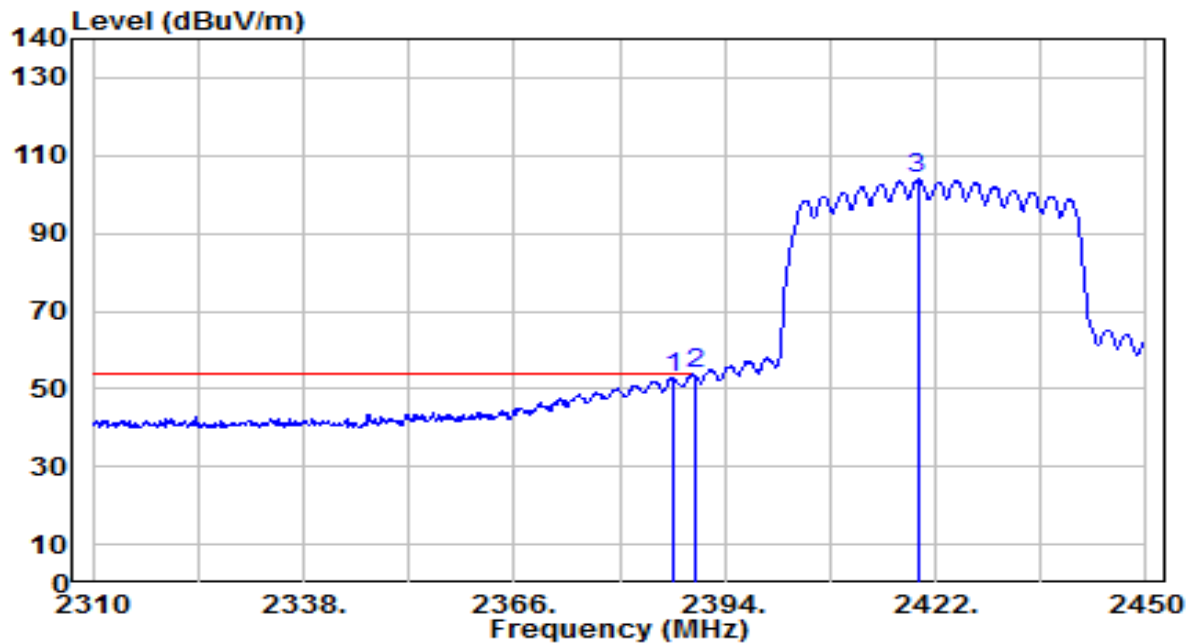


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.140	20.03	32.72	52.74	-1.26	54.00	215	85	Average
2	*	2390.000	21.11	32.73	53.84	-0.16	54.00	215	85	Average
3		2419.620	71.23	32.84	104.07	N/A	N/A	215	85	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

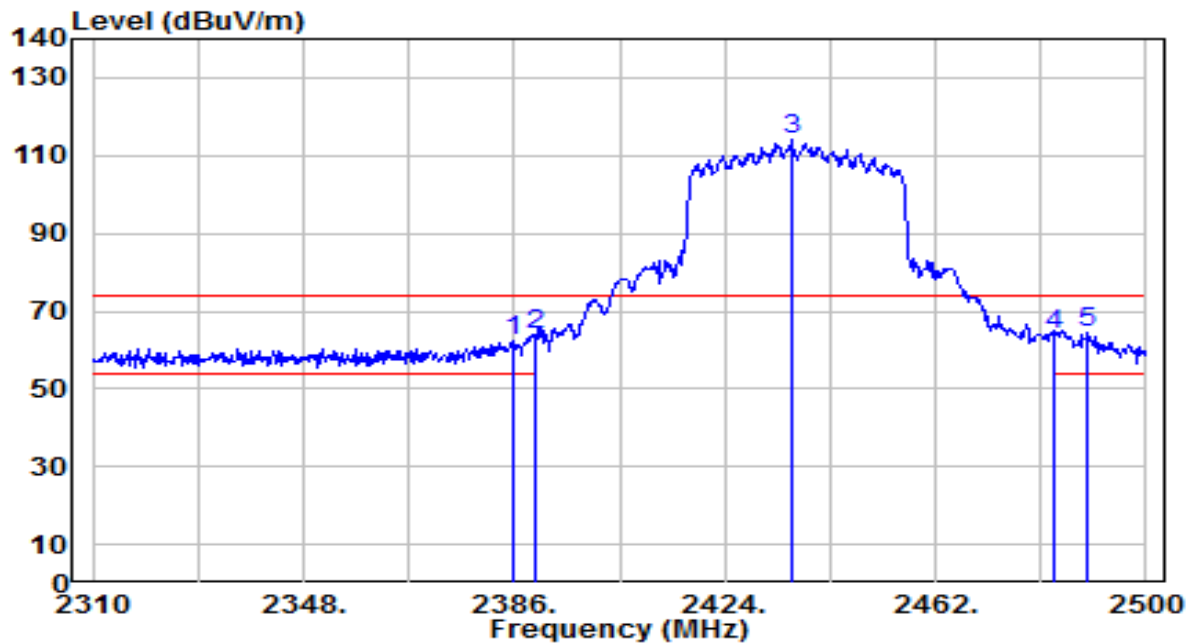


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2385.620	29.47	32.71	62.18	-11.82	74.00	230	125	Peak
2	2390.000	31.44	32.73	64.17	-9.83	74.00	230	125	Peak
3	2436.160	81.09	32.91	113.99	N/A	N/A	230	125	Peak
4	2483.500	30.99	33.09	64.09	-9.91	74.00	230	125	Peak
5	* 2489.550	31.54	33.12	64.66	-9.34	74.00	230	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

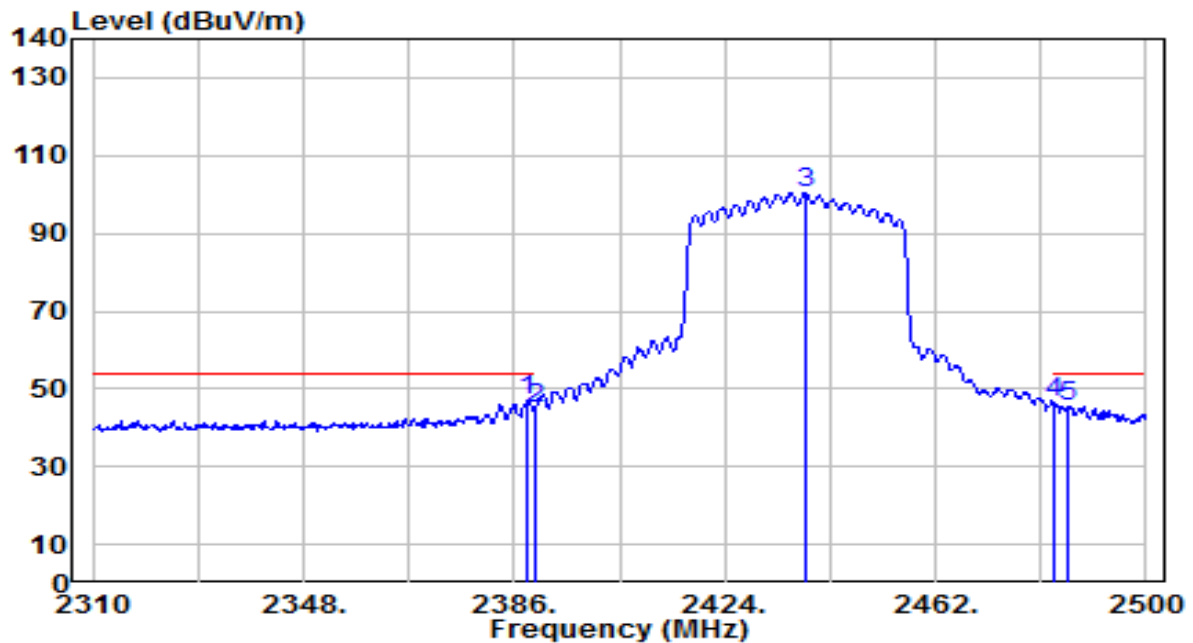


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.470	14.36	32.72	47.08	-6.92	54.00	230	125	Average
2		2390.000	12.30	32.73	45.03	-8.97	54.00	230	125	Average
3		2438.440	67.54	32.92	100.46	N/A	N/A	230	125	Average
4		2483.500	13.23	33.09	46.33	-7.67	54.00	230	125	Average
5		2485.750	12.30	33.10	45.41	-8.59	54.00	230	125	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

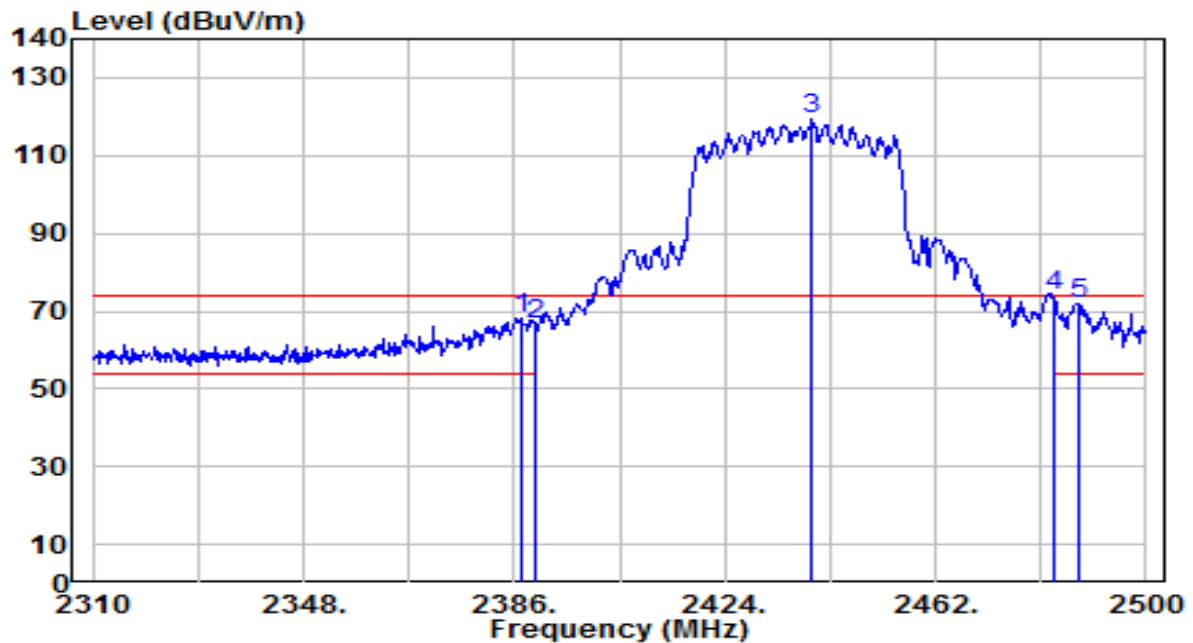


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	35.57	32.72	68.29	-5.71	74.00	145	95	Peak
2	2390.000	33.90	32.73	66.63	-7.37	74.00	145	95	Peak
3	2439.580	86.25	32.92	119.17	N/A	N/A	145	95	Peak
4	* 2483.500	40.61	33.09	73.71	-0.29	74.00	145	95	Peak
5	2487.650	38.99	33.11	72.10	-1.90	74.00	145	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 6_ANT 0+1	Test Voltage	AC 120V/60Hz

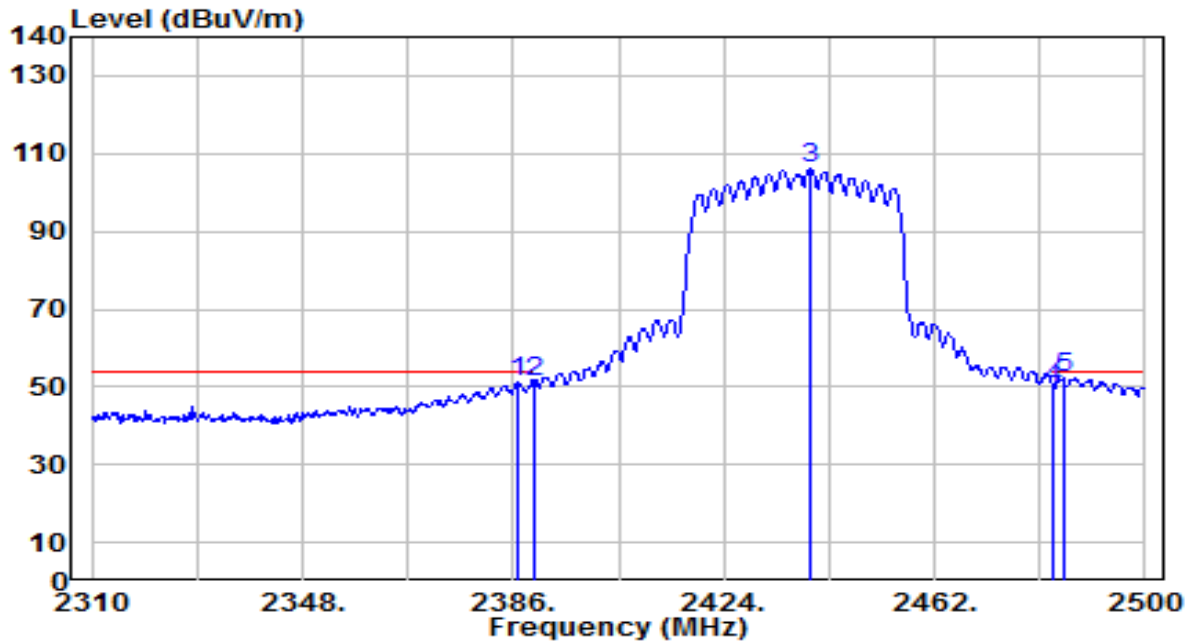


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.760	18.29	32.71	51.00	-3.00	54.00	145	95	Average
2	2390.000	18.66	32.73	51.39	-2.61	54.00	145	95	Average
3	2439.770	73.31	32.92	106.24	N/A	N/A	145	95	Average
4	2483.500	16.71	33.09	49.80	-4.20	54.00	145	95	Average
5	* 2485.180	19.42	33.10	52.52	-1.48	54.00	145	95	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

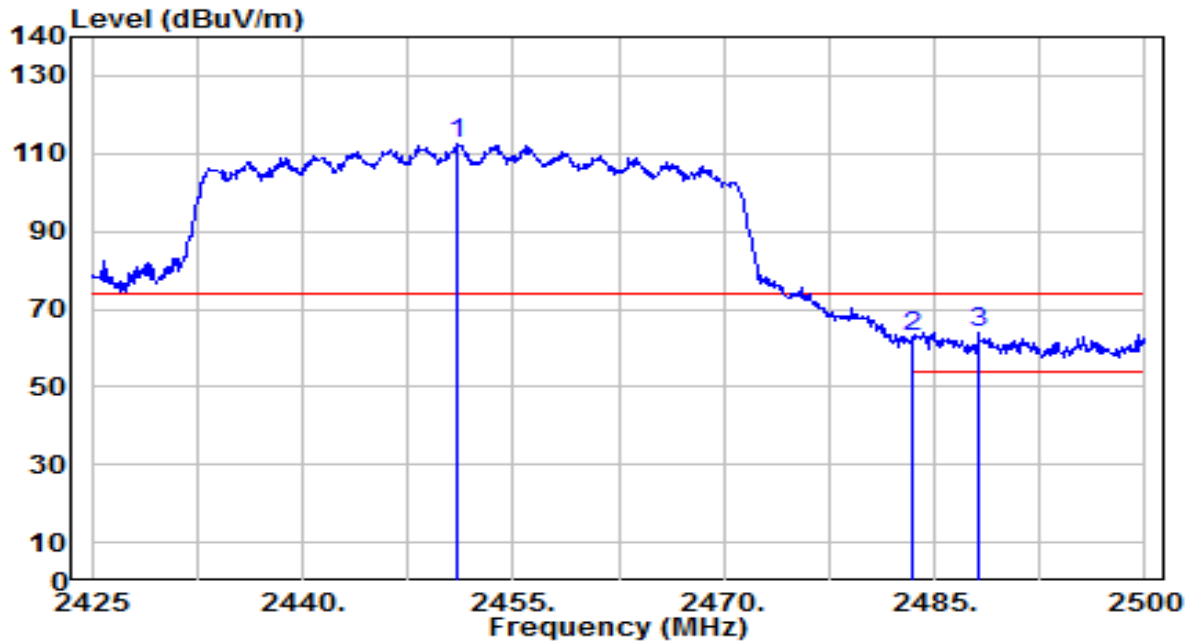


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2451.100	79.43	32.97	112.40	N/A	N/A	275	115	Peak
2	2483.500	29.79	33.09	62.89	-11.11	74.00	275	115	Peak
3	* 2488.150	30.87	33.11	63.98	-10.02	74.00	275	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

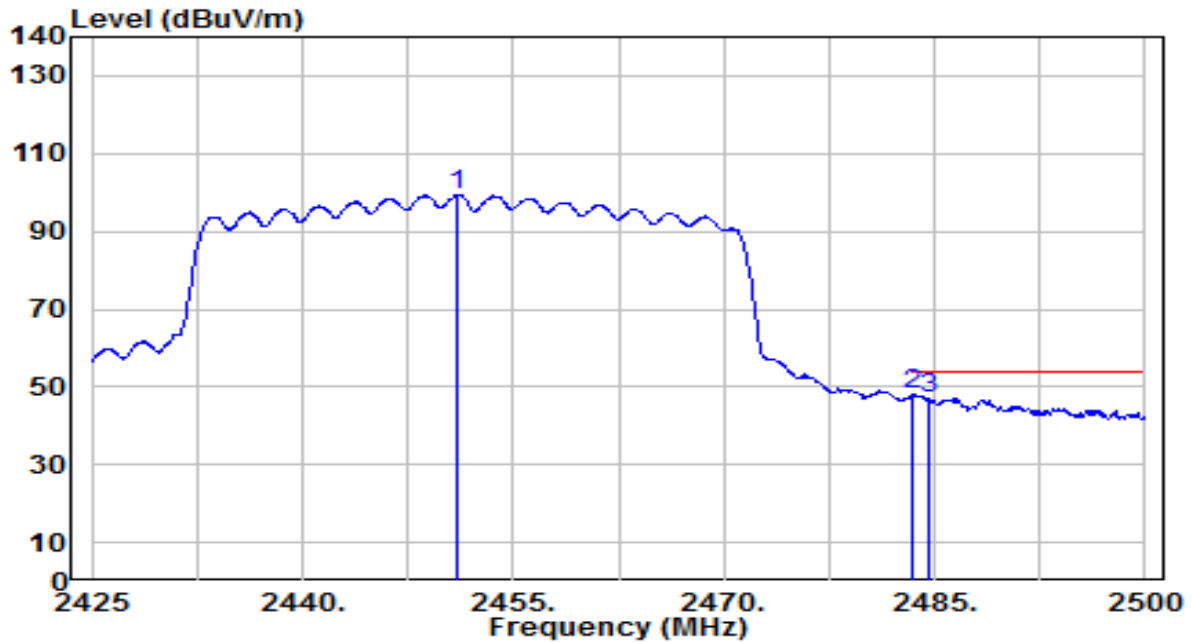


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2450.950	66.43	32.97	99.39	N/A	N/A	275	115	Average
2	*	2483.500	15.03	33.09	48.13	-5.87	54.00	275	115	Average
3		2484.625	13.81	33.10	46.91	-7.09	54.00	275	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

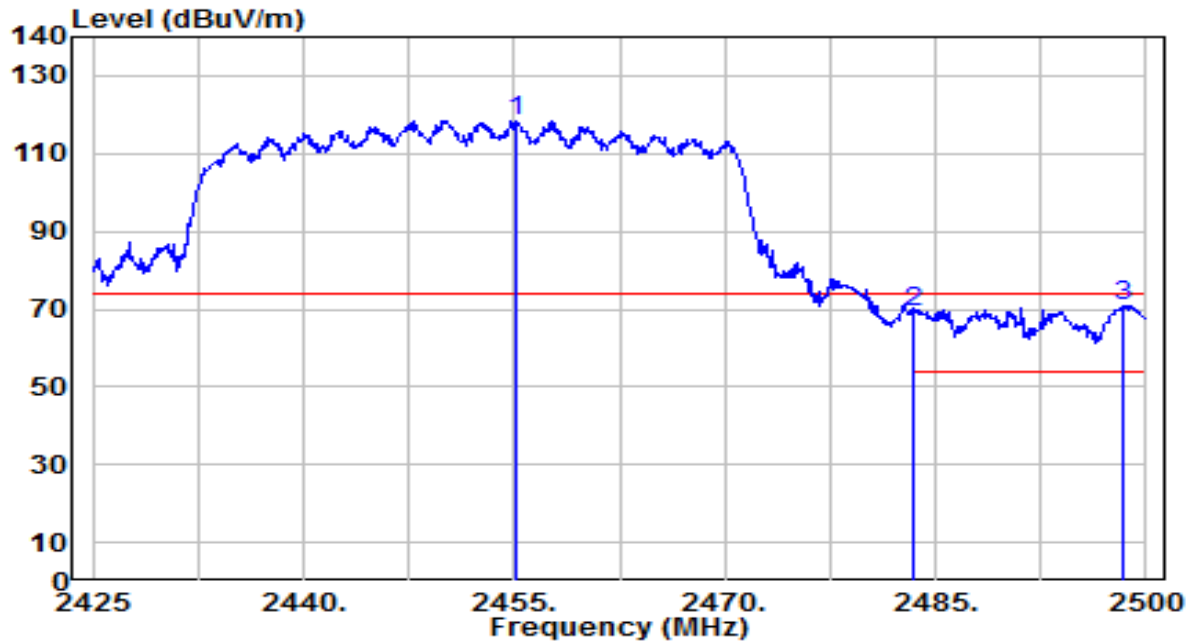


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2455.225	85.45	32.98	118.43	N/A	N/A	210	75	Peak
2	2483.500	36.22	33.09	69.32	-4.68	74.00	210	75	Peak
3	* 2498.350	37.74	33.15	70.89	-3.11	74.00	210	75	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-26
Factor	BBHA 9120D	Temp. / Humidity	25°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11be-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

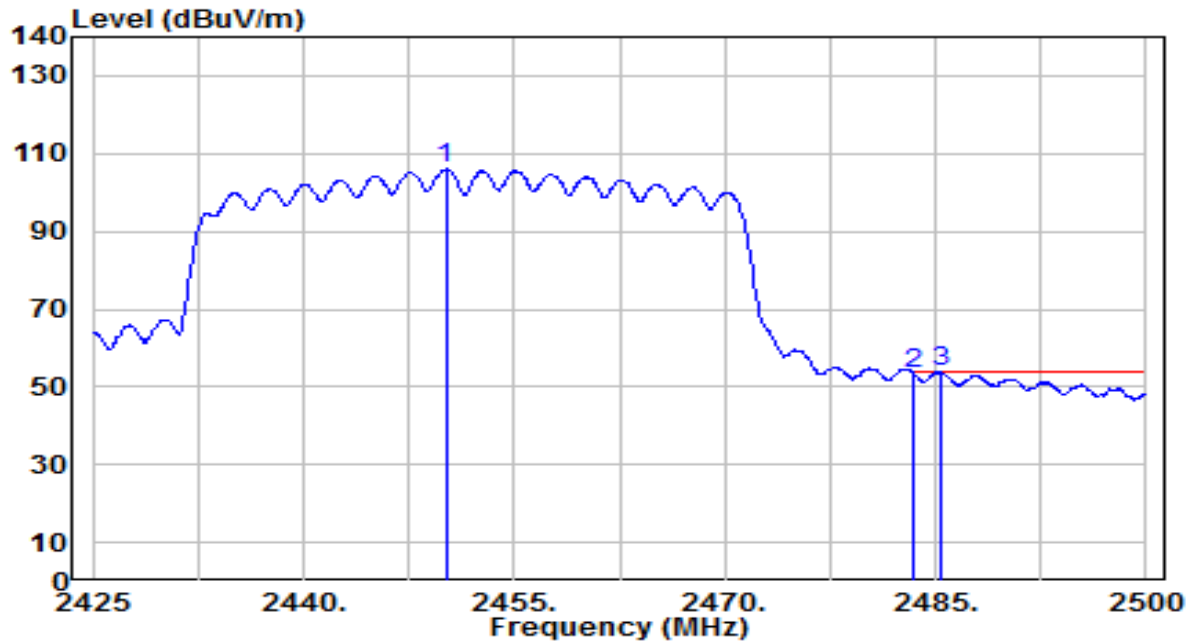

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2450.125	72.99	32.96	105.95	N/A	N/A	210	75	Average
2	2483.500	20.23	33.09	53.32	-0.68	54.00	210	75	Average
3	* 2485.300	20.62	33.10	53.72	-0.28	54.00	210	75	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.