


EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 48_ANT 0+1+3	Test Voltage	AC 120V/60Hz

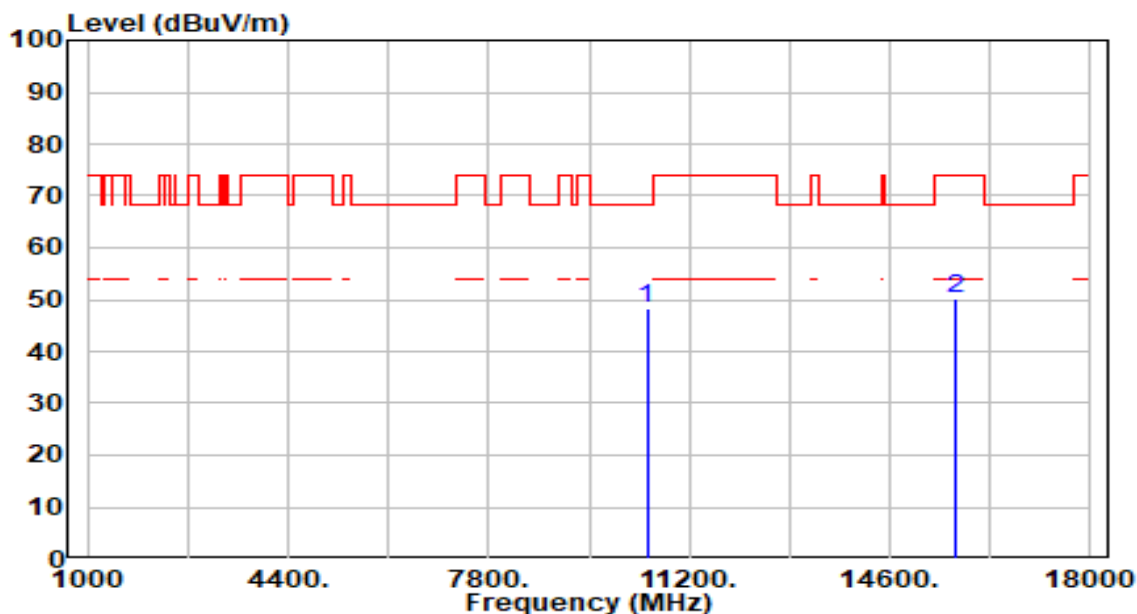


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.67	6.45	48.12	-20.08	68.20	100	299	Peak
2		15720.000	41.53	8.62	50.15	-23.85	74.00	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 52_ANT 0+1+3	Test Voltage	AC 120V/60Hz

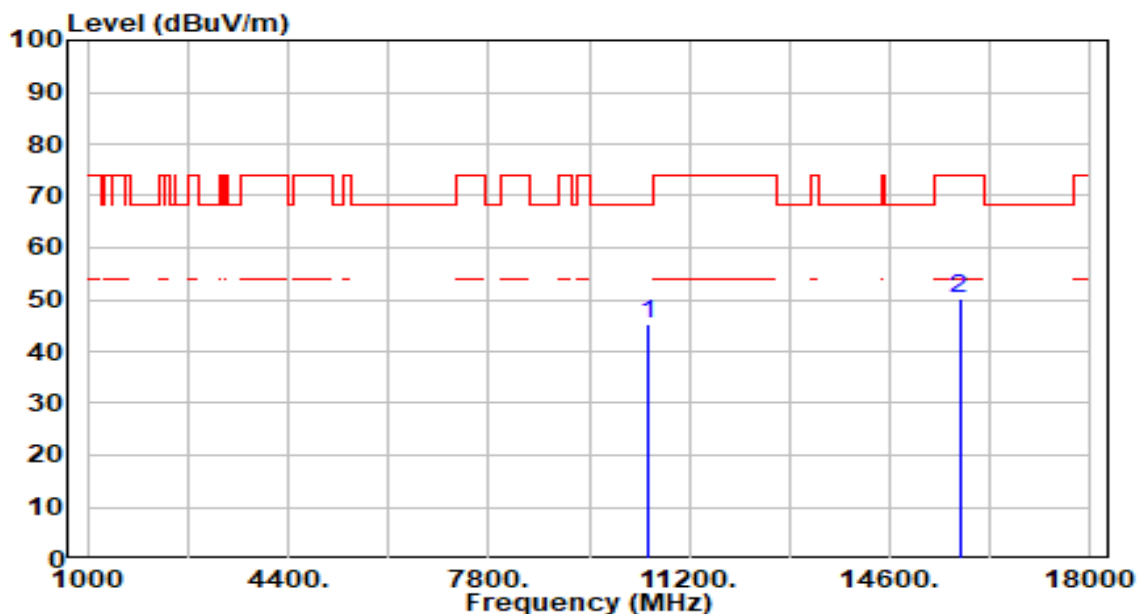


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	38.80	6.41	45.21	-22.99	68.20	100	89	Peak
2		15780.000	41.56	8.73	50.28	-23.72	74.00	100	71	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 52_ANT 0+1+3	Test Voltage	AC 120V/60Hz

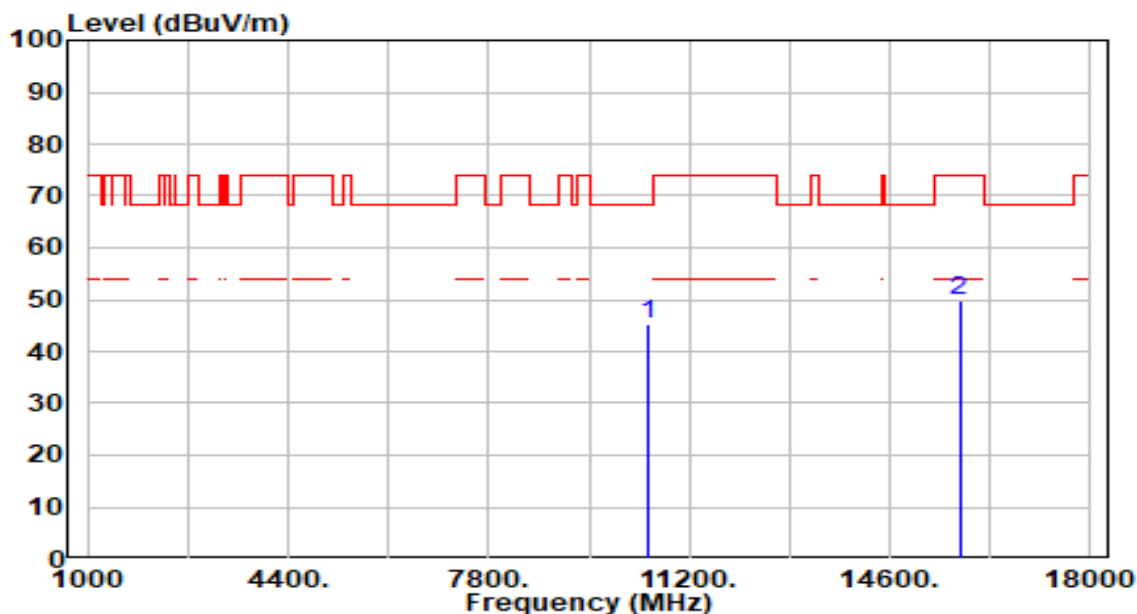


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	39.00	6.41	45.42	-22.78	68.20	100	235	Peak
2		15780.000	41.05	8.73	49.78	-24.22	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 60_ANT 0+1+3	Test Voltage	AC 120V/60Hz

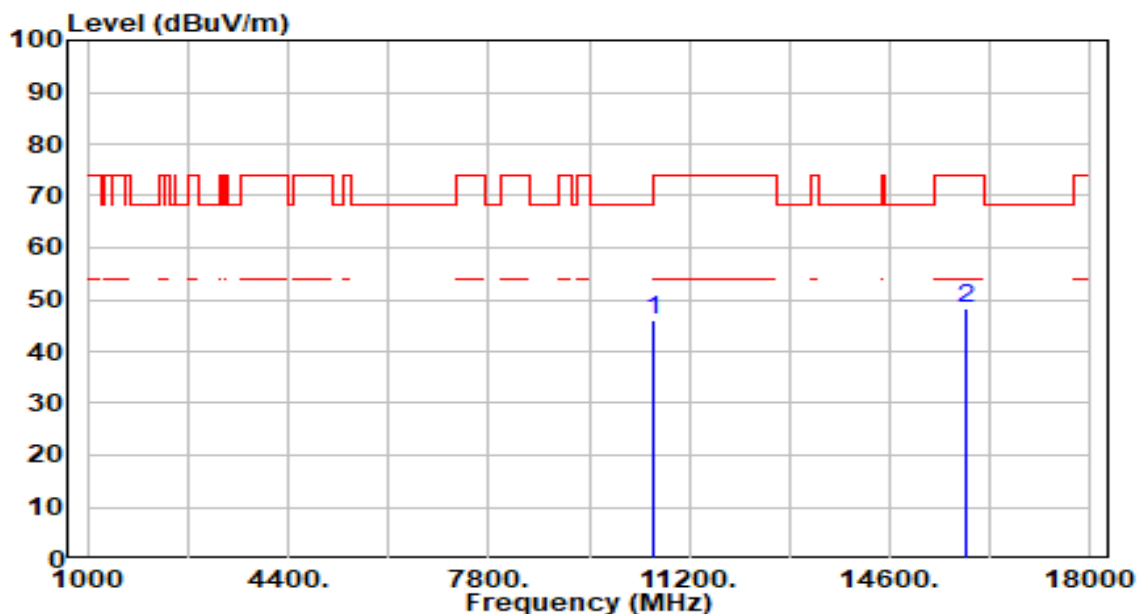


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	39.76	6.36	46.11	-22.09	68.20	100	246	Peak
2		15900.000	39.42	8.94	48.36	-25.64	74.00	100	234	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 60_ANT 0+1+3	Test Voltage	AC 120V/60Hz

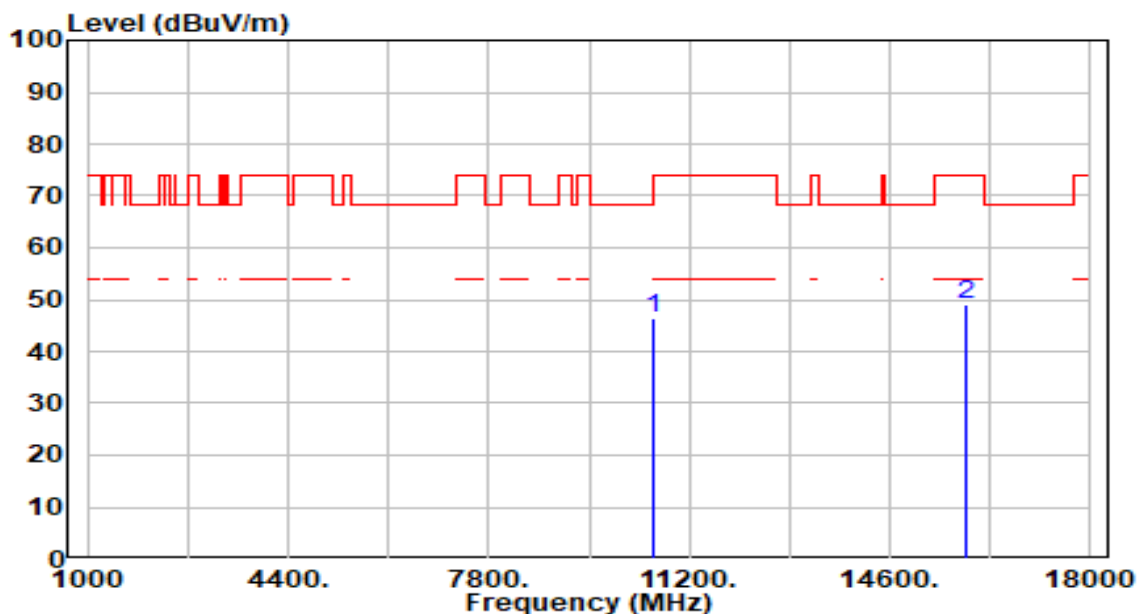


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	40.11	6.36	46.47	-21.73	68.20	100	76	Peak
2		15900.000	40.18	8.94	49.12	-24.88	74.00	100	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

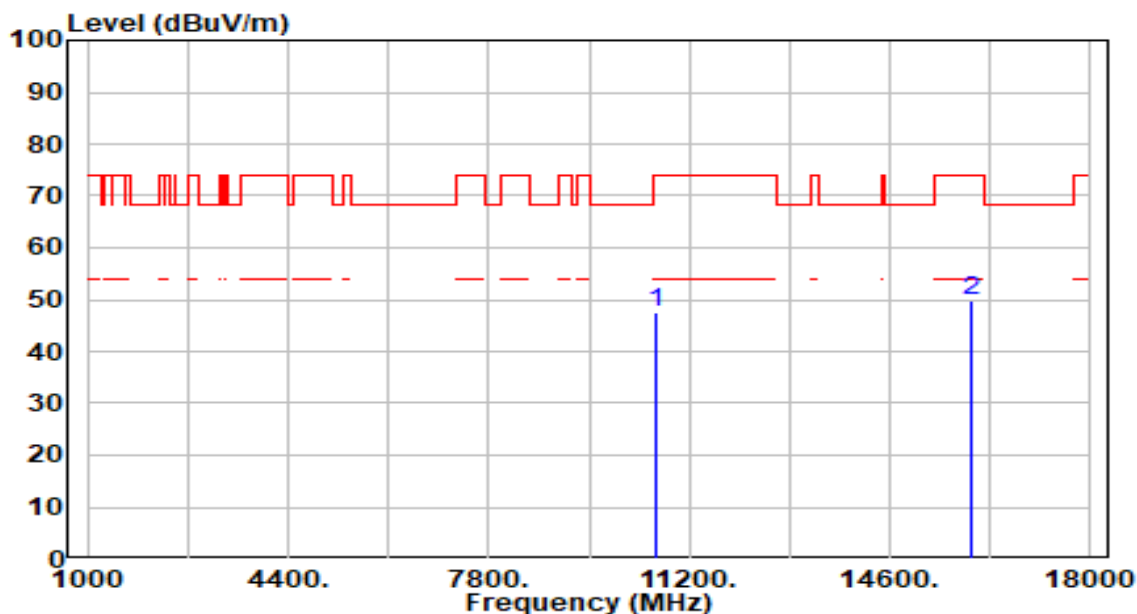


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10640.000	41.30	6.40	47.71	-26.29	74.00	100	68	Peak
2	*	15960.000	40.71	8.95	49.65	-24.35	74.00	100	32	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

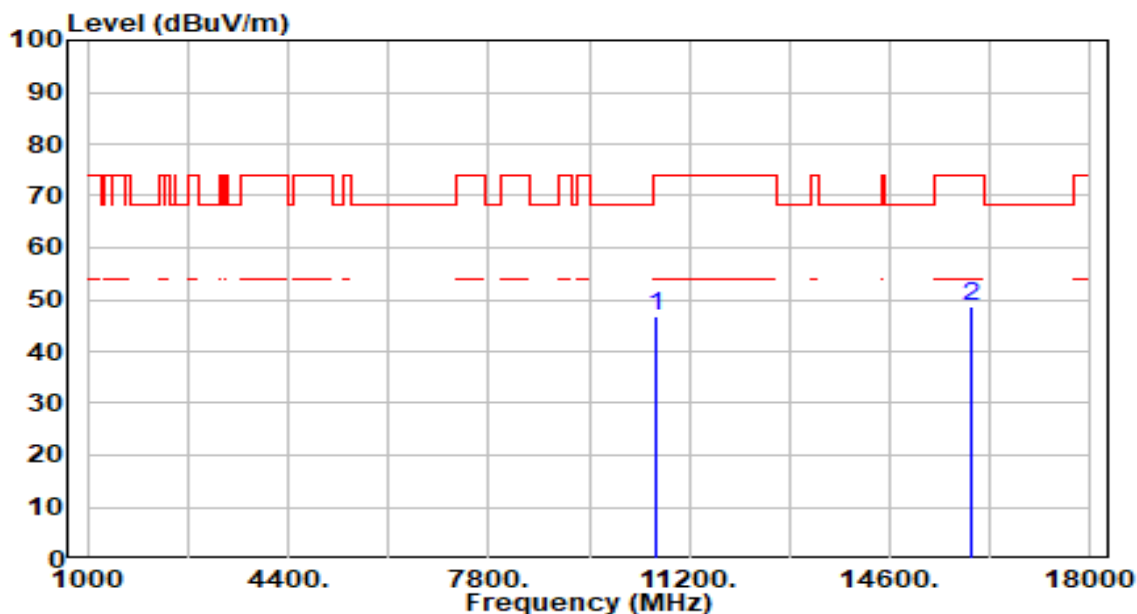


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	40.27	6.40	46.68	-27.32	74.00	100	320	Peak
2	* 15960.000	39.73	8.95	48.68	-25.32	74.00	100	332	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

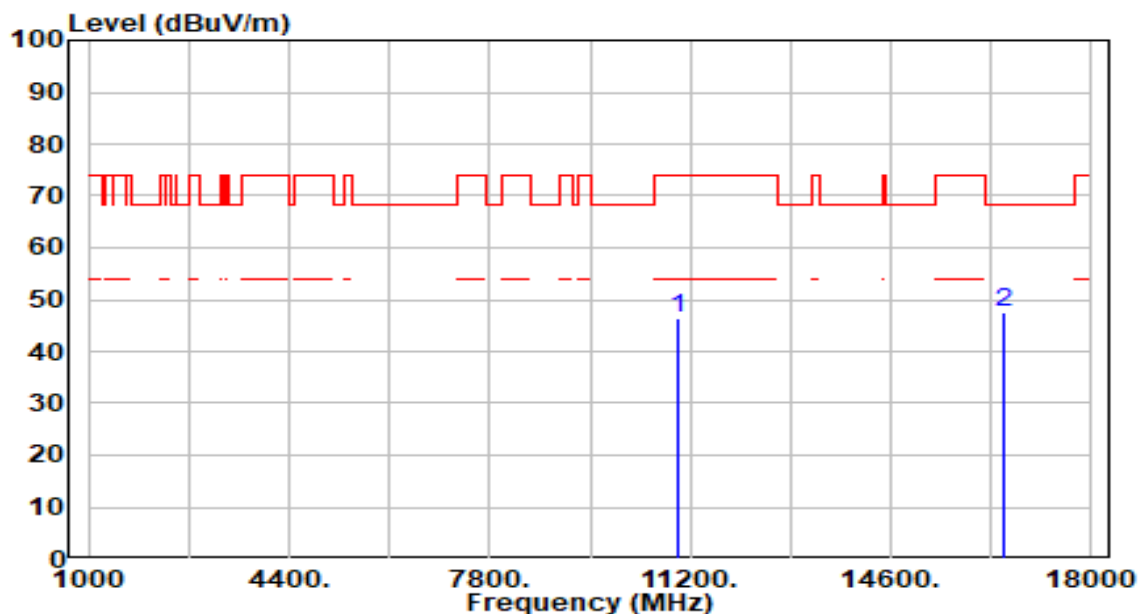


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	39.98	6.27	46.25	-27.75	74.00	100	238	Peak
2	*	16500.000	39.12	8.33	47.45	-20.75	68.20	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

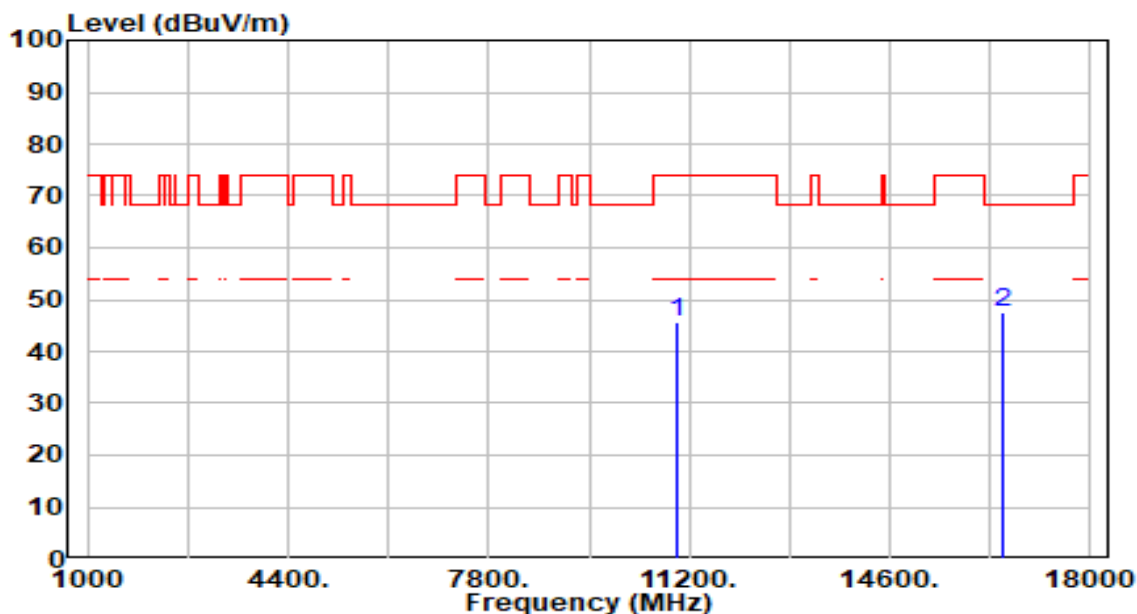


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	39.42	6.27	45.69	-28.31	74.00	100	0	Peak
2	*	16500.000	39.36	8.33	47.69	-20.51	68.20	100	24	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 116_ANT 0+1+3	Test Voltage	AC 120V/60Hz

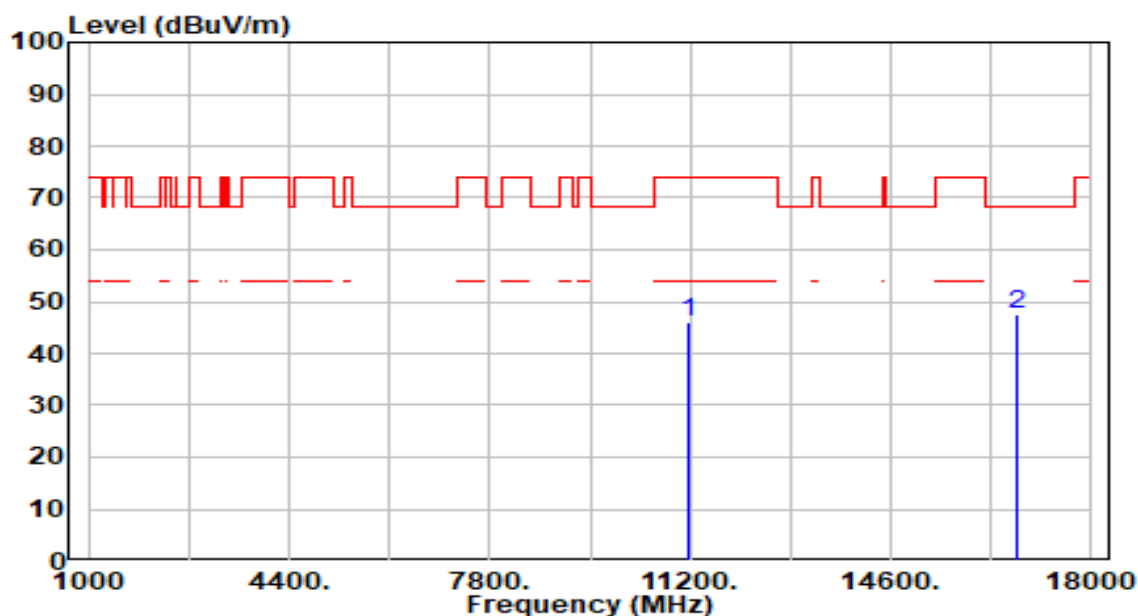


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	39.30	6.76	46.05	-27.95	74.00	100	0	Peak
2	*	16740.000	39.25	8.26	47.51	-20.69	68.20	100	48	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 116_ANT 0+1+3	Test Voltage	AC 120V/60Hz

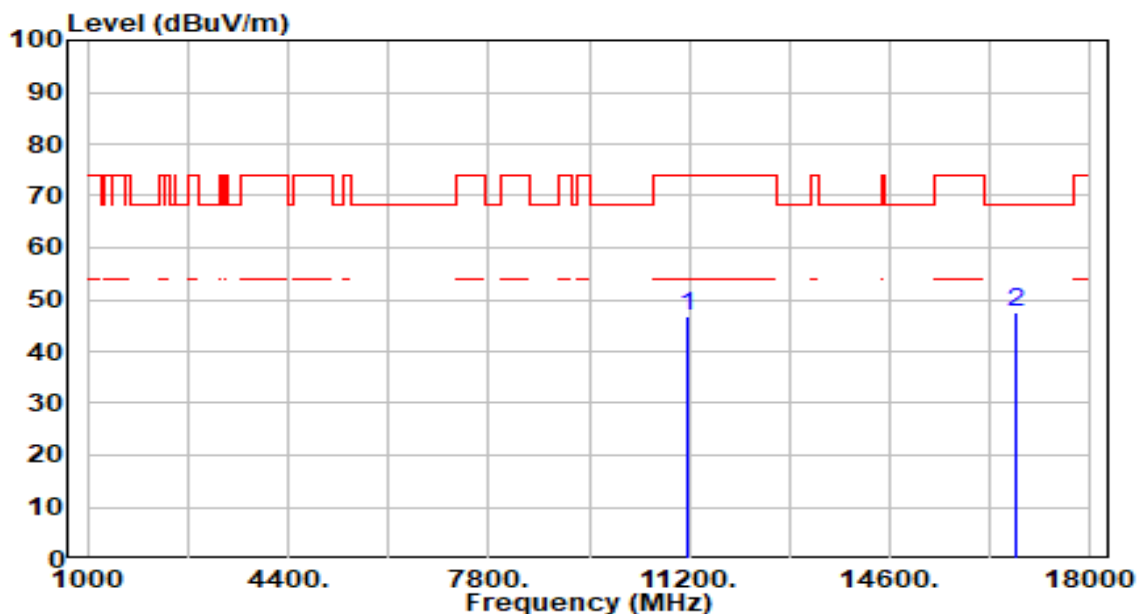


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	39.87	6.76	46.62	-27.38	74.00	100	306	Peak
2	* 16740.000	39.26	8.26	47.52	-20.68	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

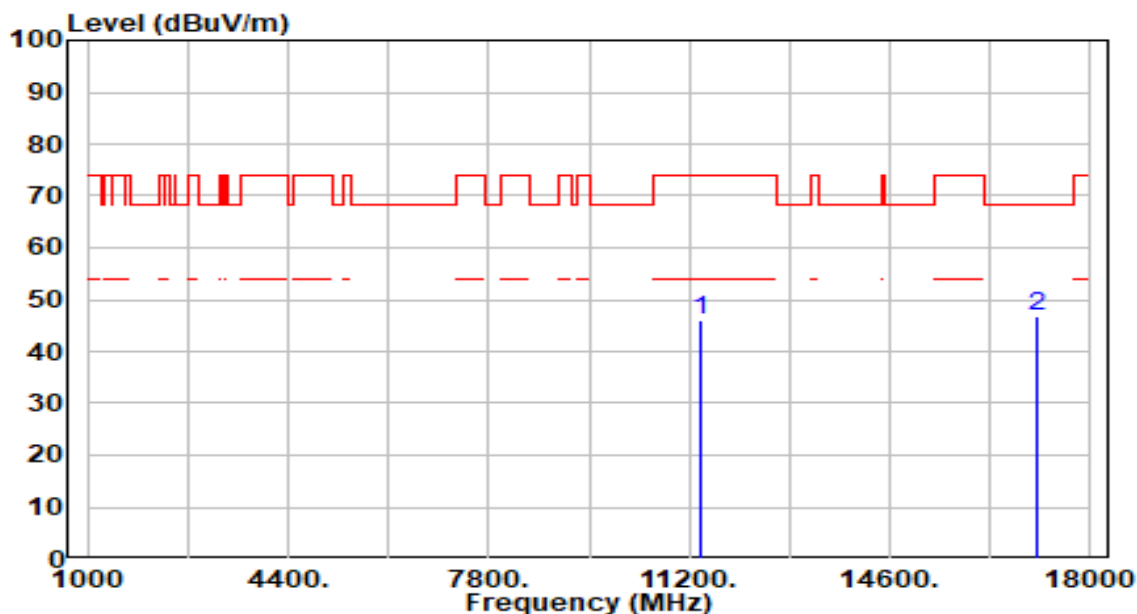


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	38.87	7.14	46.00	-28.00	74.00	100	327	Peak
2	* 17100.000	38.99	7.77	46.76	-21.44	68.20	100	214	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

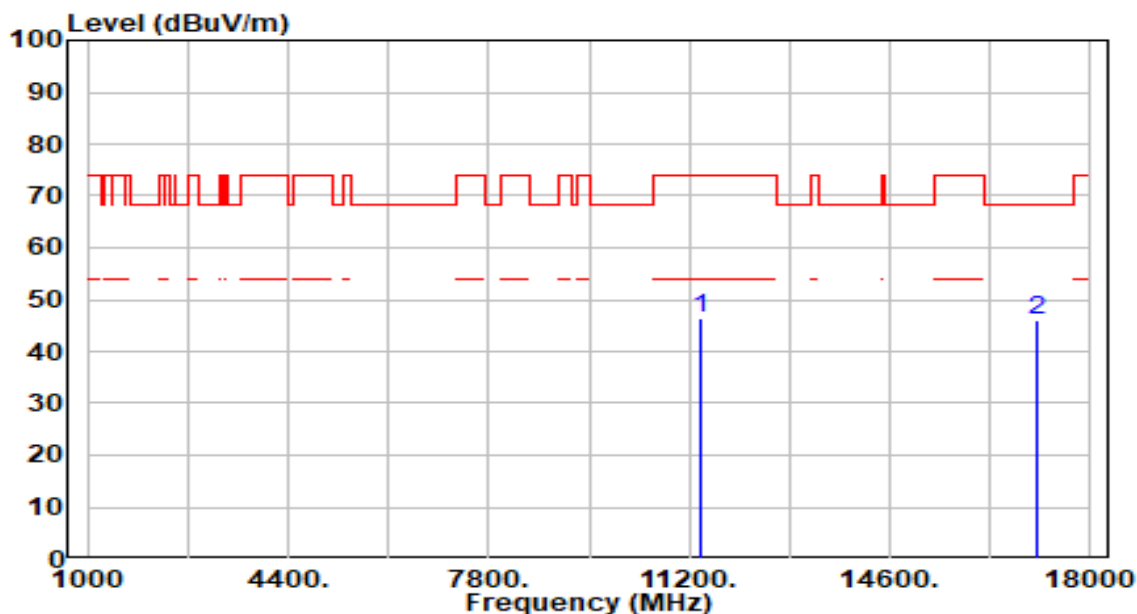


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	39.36	7.14	46.50	-27.50	74.00	100	90	Peak
2	*	17100.000	38.41	7.77	46.18	-22.02	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 144_ANT 0+1+3	Test Voltage	AC 120V/60Hz

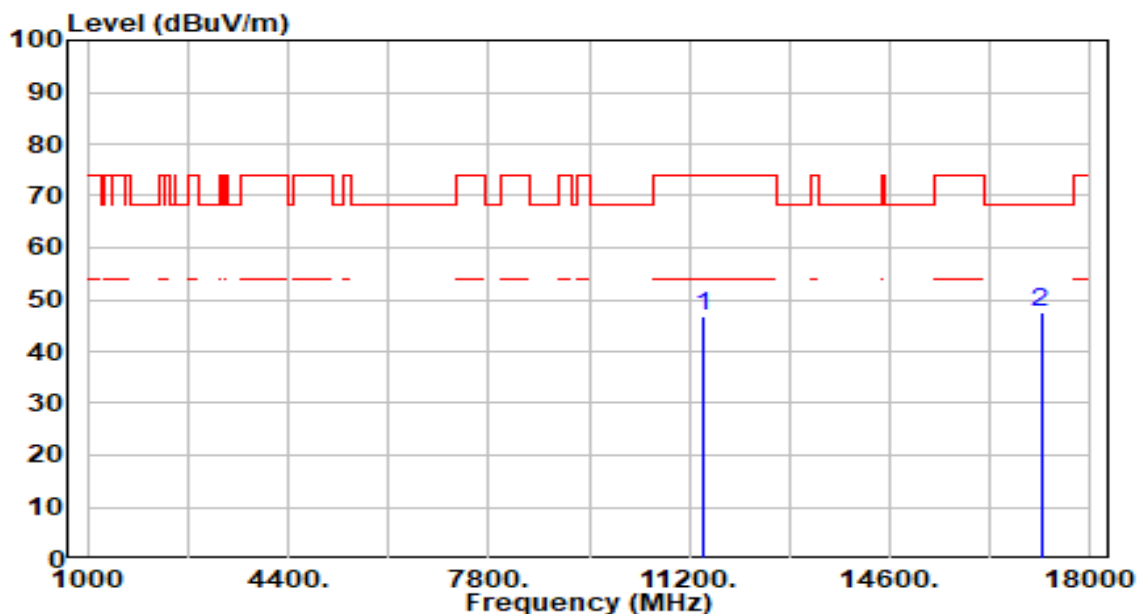


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	39.77	7.15	46.92	-27.08	74.00	100	116	Peak
2	*	17160.000	39.84	7.64	47.48	-20.72	68.20	100	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 144_ANT 0+1+3	Test Voltage	AC 120V/60Hz

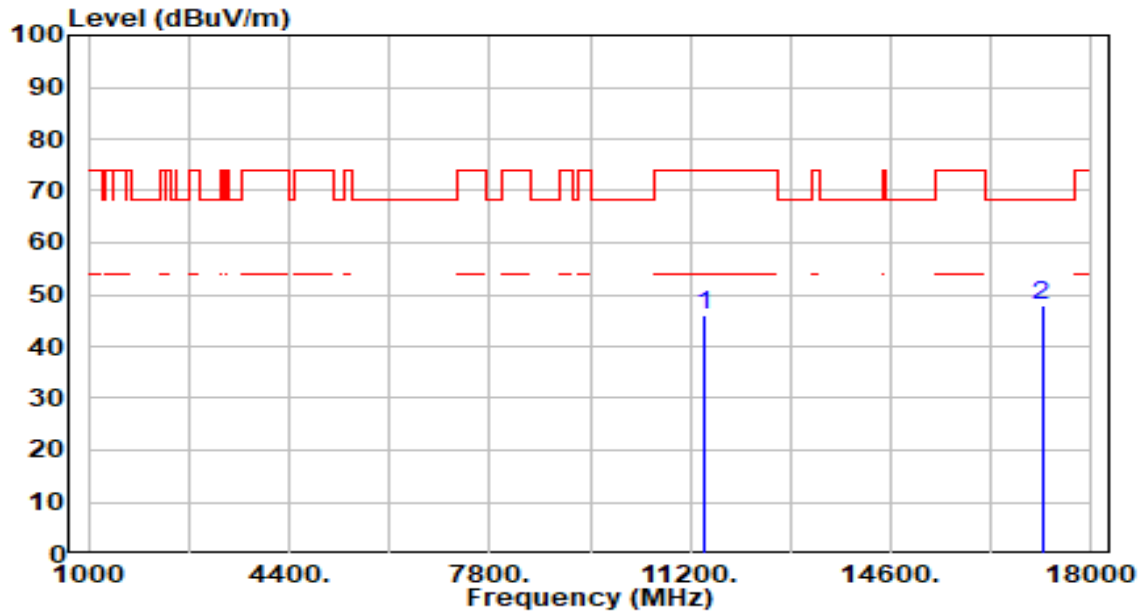


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	38.85	7.15	46.00	-28.00	74.00	100	360	Peak
2	* 17160.000	40.16	7.64	47.80	-20.40	68.20	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

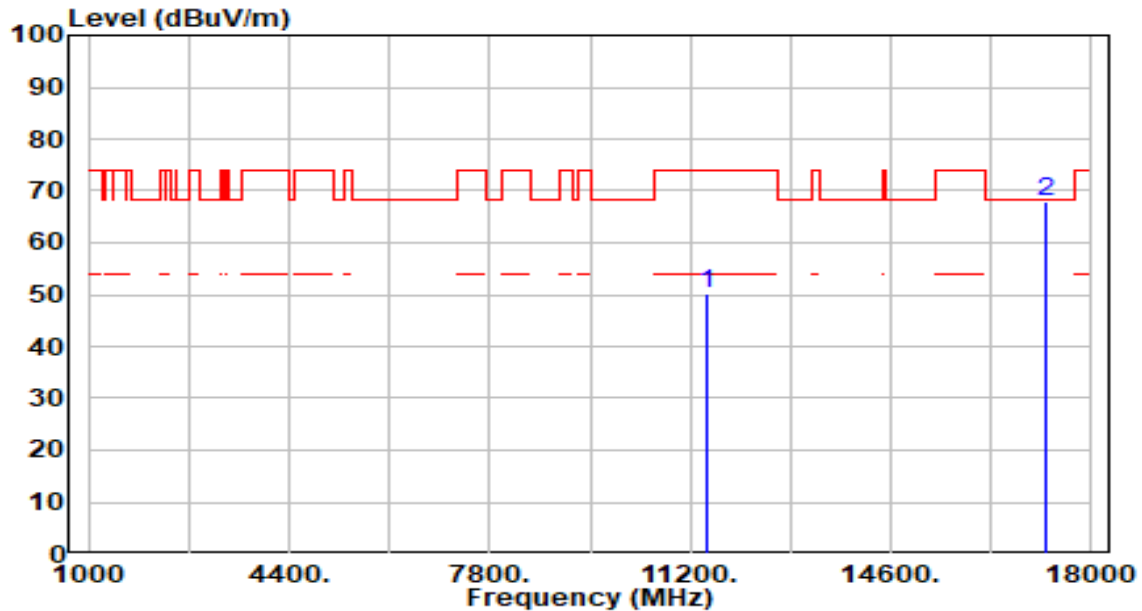


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	43.05	7.17	50.22	-23.78	74.00	300	180	Peak
2	*	17235.000	60.46	7.51	67.97	-0.23	68.20	277	56	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

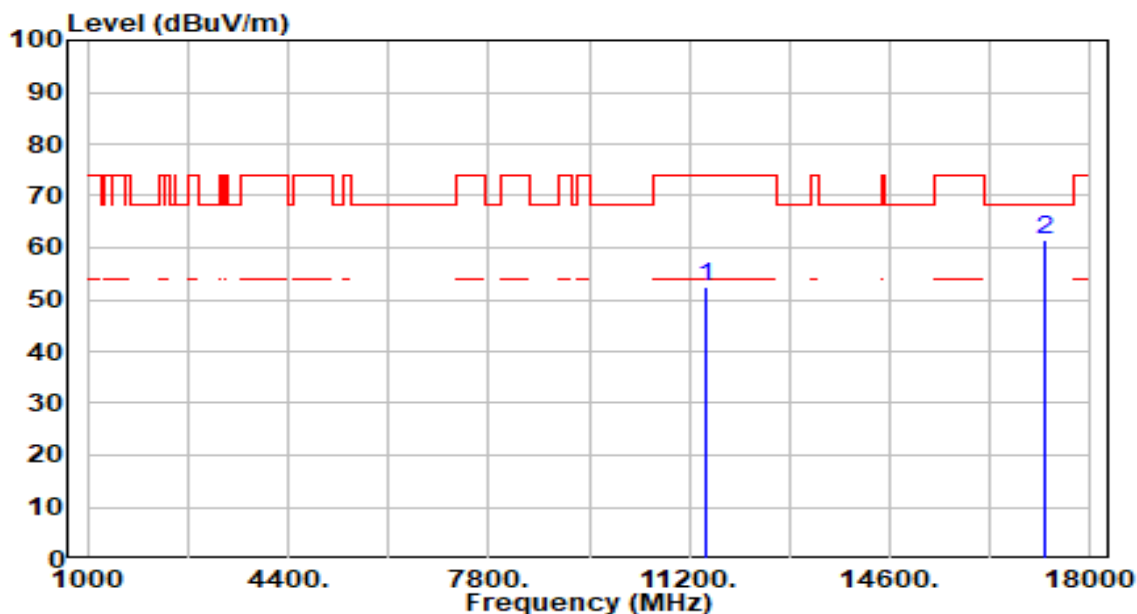


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11490.000	45.18	7.17	52.35	-21.65	74.00	100	40	Peak
2	*	17235.000	53.87	7.51	61.38	-6.82	68.20	100	137	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 157_ANT 0+1+3	Test Voltage	AC 120V/60Hz

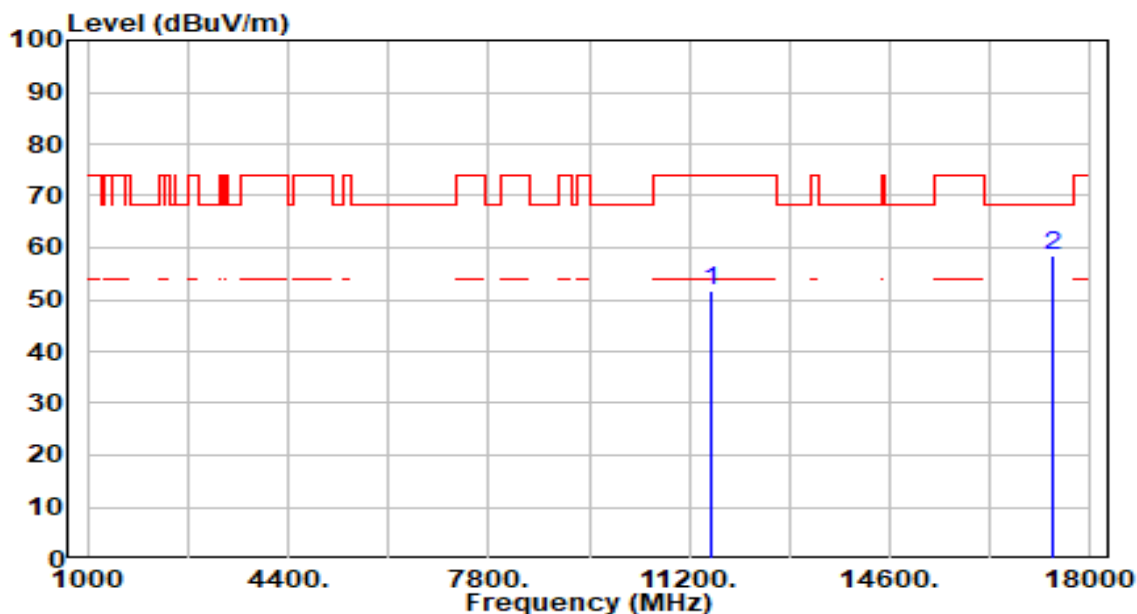


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	44.33	7.25	51.58	-22.42	74.00	300	316	Peak
2	*	17355.000	51.21	7.27	58.49	-9.71	68.20	300	62	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 157_ANT 0+1+3	Test Voltage	AC 120V/60Hz

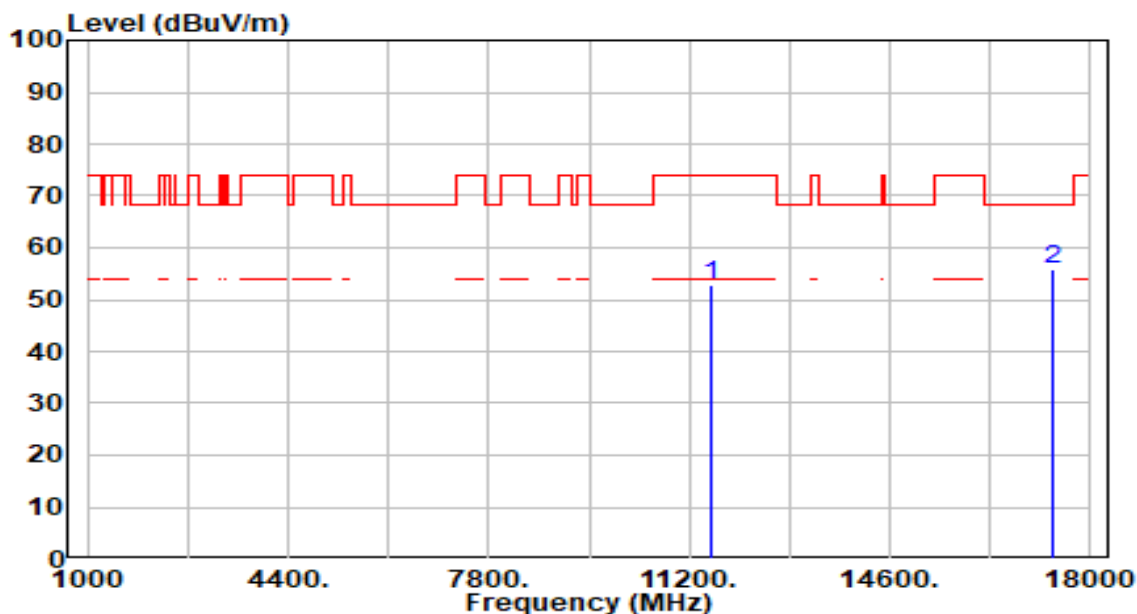


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11570.000	45.69	7.25	52.94	-21.06	74.00	100	293	Peak
2	*	17355.000	48.47	7.27	55.75	-12.45	68.20	100	134	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

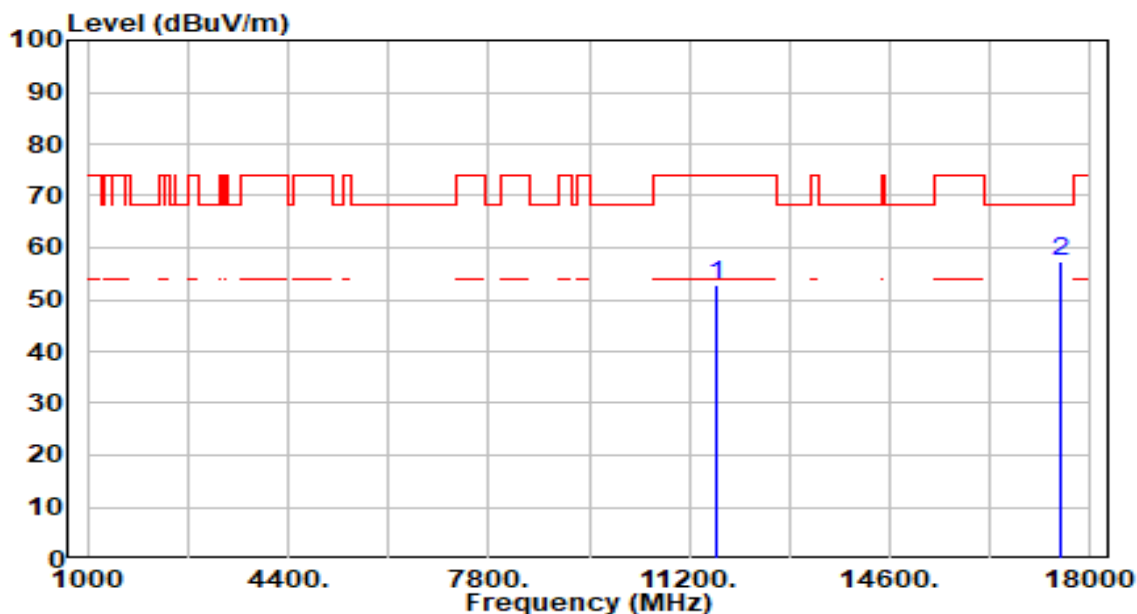


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	45.71	7.27	52.97	-21.03	74.00	300	318	Peak
2	*	17475.000	49.89	7.33	57.22	-10.98	68.20	300	168	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

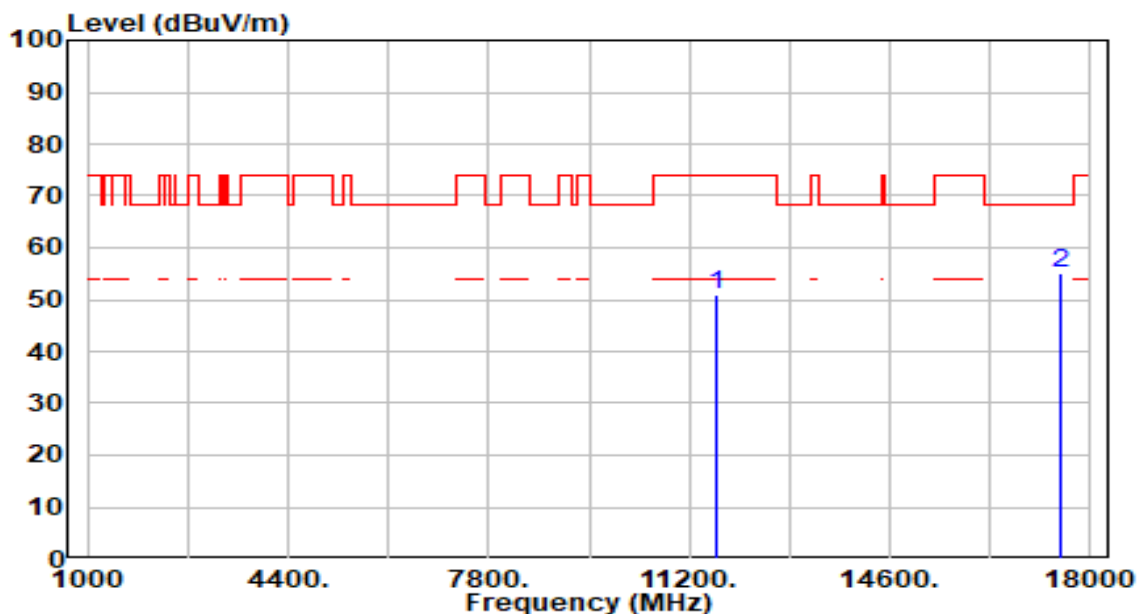


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11650.000	43.81	7.27	51.08	-22.92	74.00	100	106	Peak
2	*	17475.000	47.84	7.33	55.17	-13.03	68.20	100	68	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

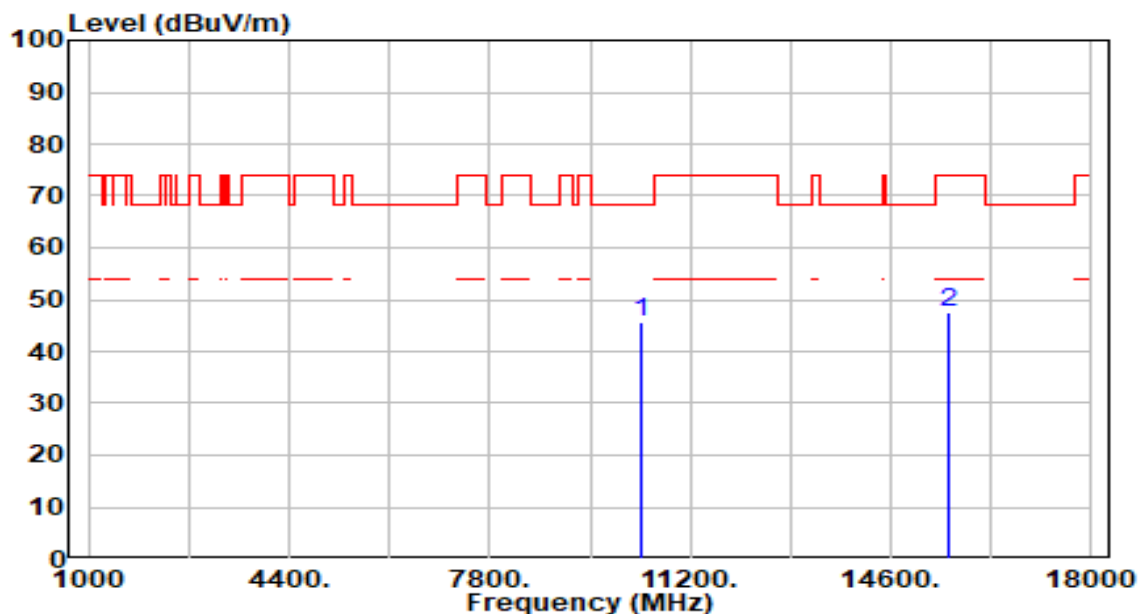


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	39.13	6.55	45.68	-22.52	68.20	100	292	Peak
2		15570.000	39.22	8.38	47.60	-26.40	74.00	100	232	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

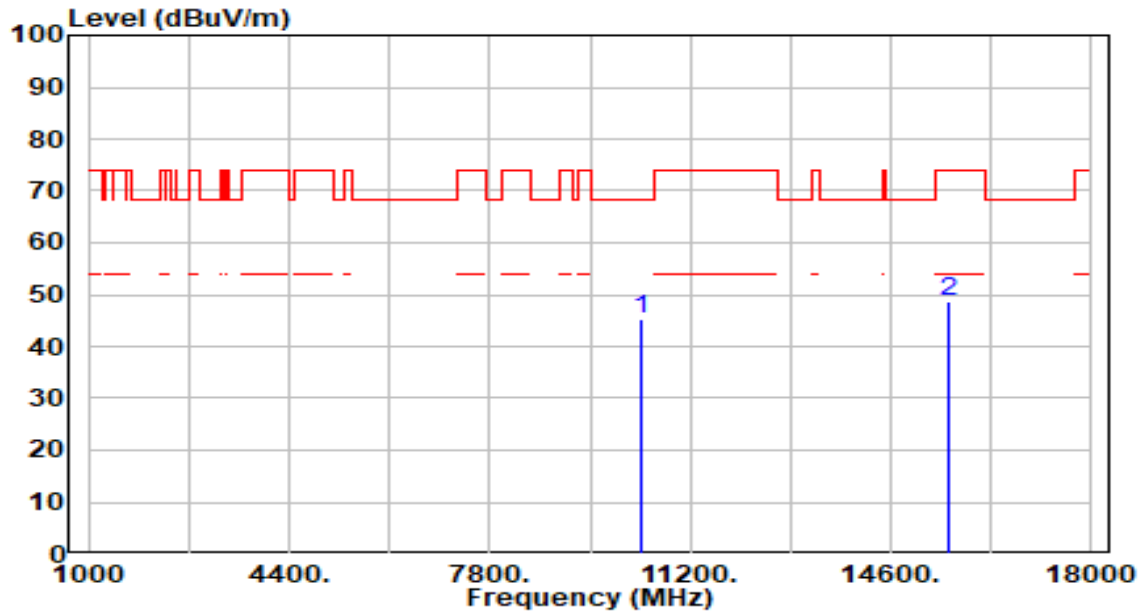


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	38.92	6.55	45.47	-22.73	68.20	100	10	Peak
2		15570.000	40.35	8.38	48.73	-25.27	74.00	100	49	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 0+1+3	Test Voltage	AC 120V/60Hz

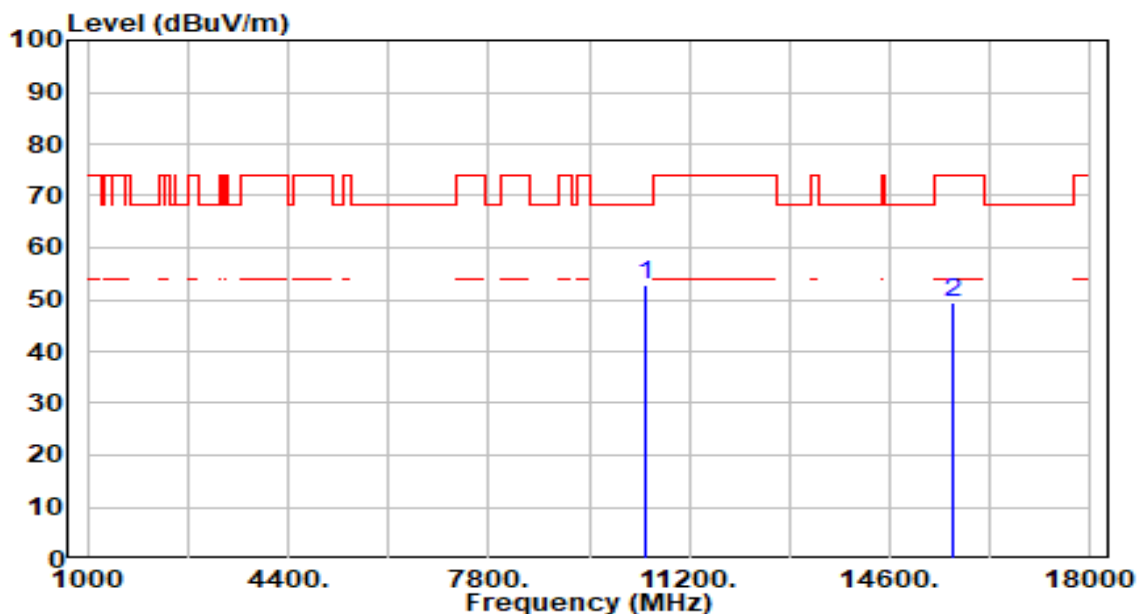


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	46.19	6.47	52.66	-15.54	68.20	300	170	Peak
2		15690.000	40.89	8.56	49.45	-24.55	74.00	300	11	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 46_ANT 0+1+3	Test Voltage	AC 120V/60Hz

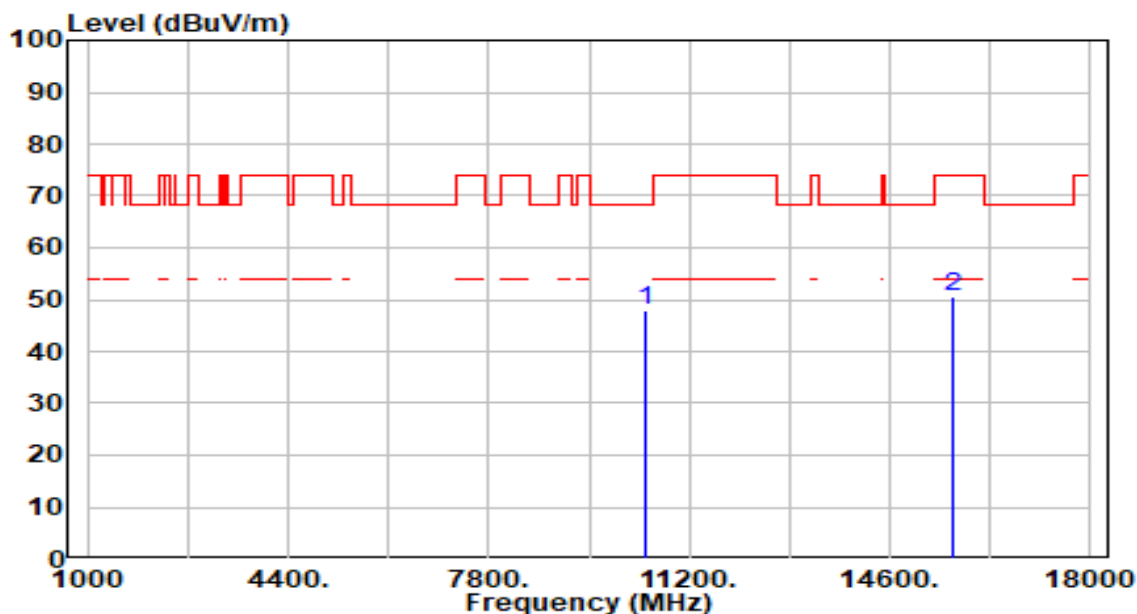


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	41.39	6.47	47.86	-20.34	68.20	100	243	Peak
2		15690.000	42.10	8.56	50.66	-23.34	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 0+1+3	Test Voltage	AC 120V/60Hz

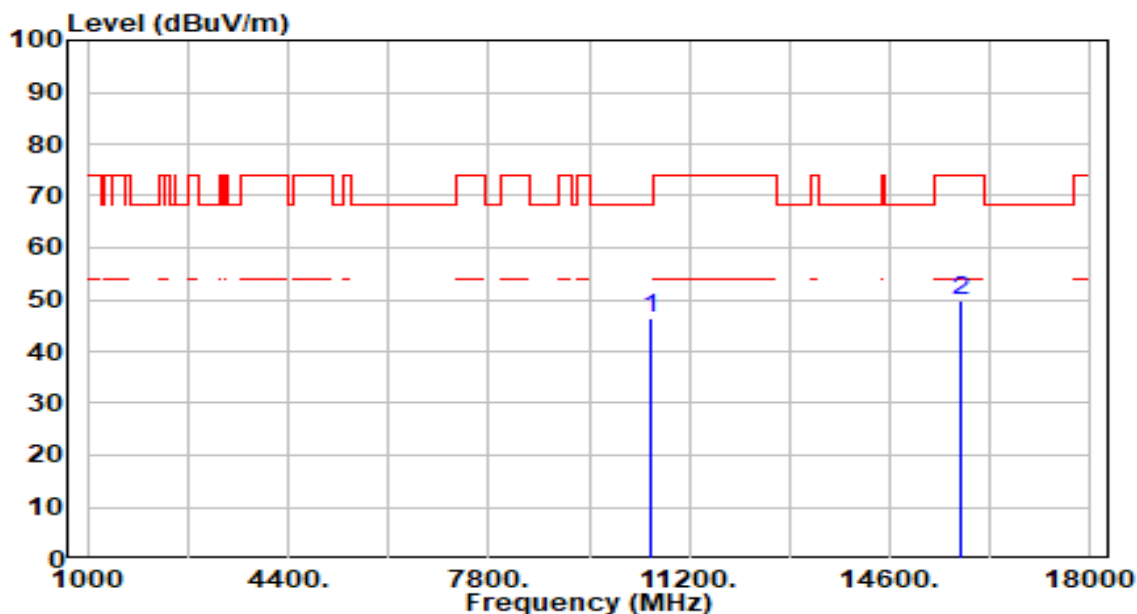


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	39.95	6.40	46.34	-21.86	68.20	100	27	Peak
2		15810.000	41.03	8.78	49.81	-24.19	74.00	100	12	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 54_ANT 0+1+3	Test Voltage	AC 120V/60Hz

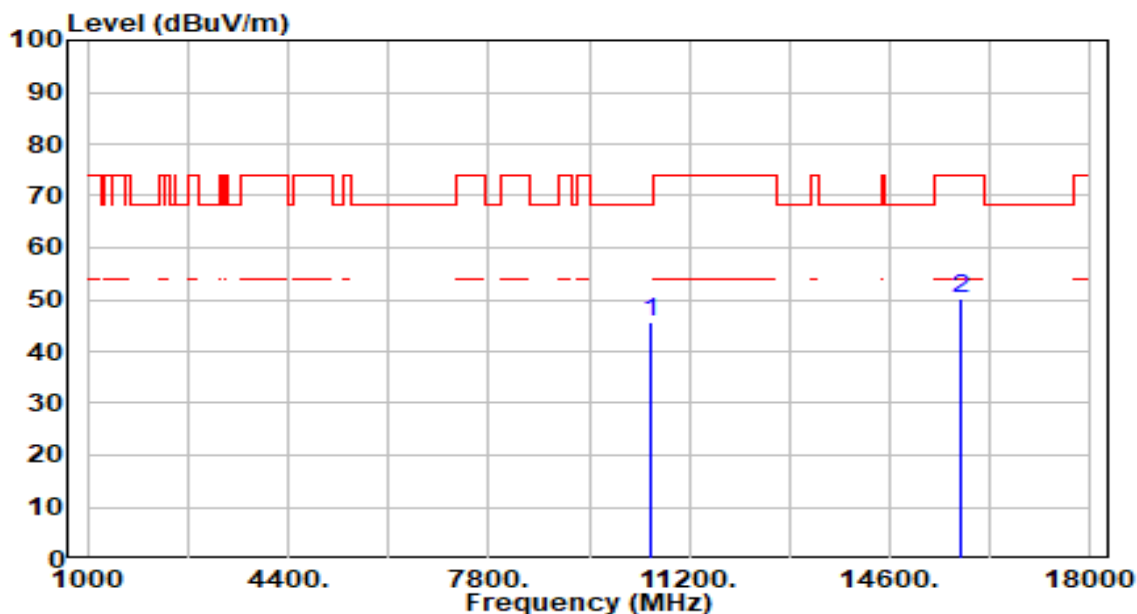


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	39.40	6.40	45.80	-22.40	68.20	100	360	Peak
2		15810.000	41.43	8.78	50.21	-23.79	74.00	100	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

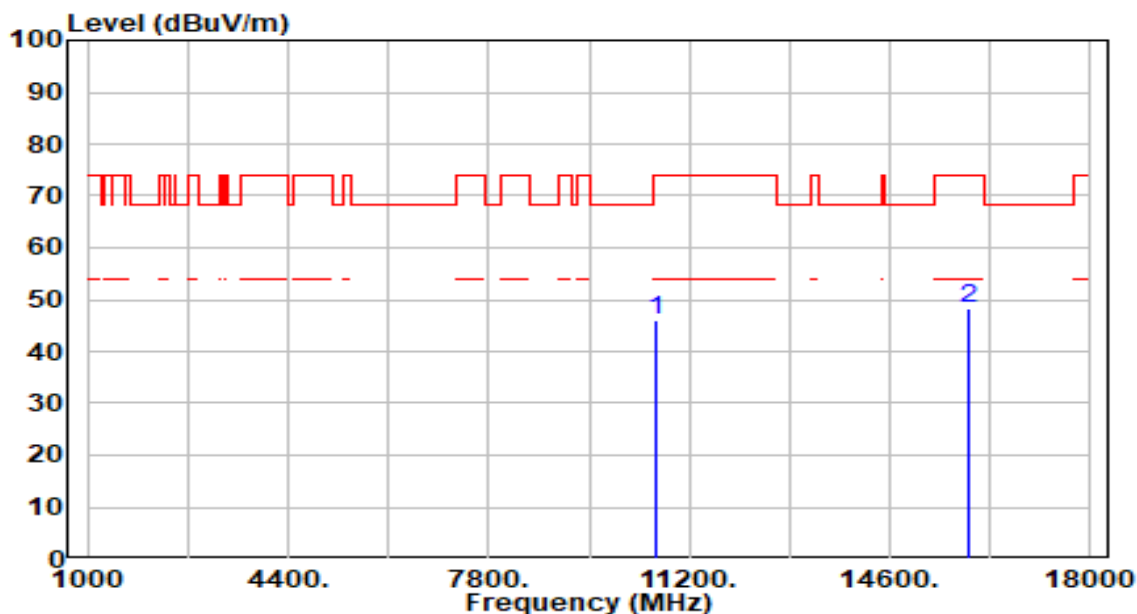


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	39.78	6.38	46.16	-27.84	74.00	100	222	Peak
2	* 15930.000	39.31	8.94	48.25	-25.75	74.00	100	258	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

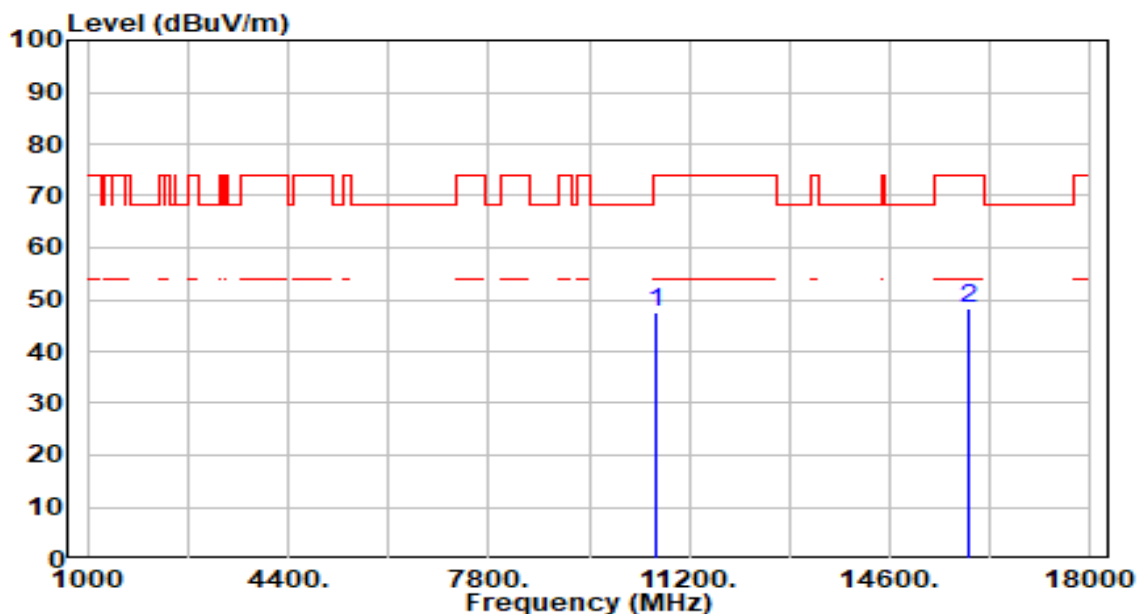


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		10620.000	41.23	6.38	47.61	-26.39	74.00	100	58	Peak
2	*	15930.000	39.45	8.94	48.39	-25.61	74.00	100	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

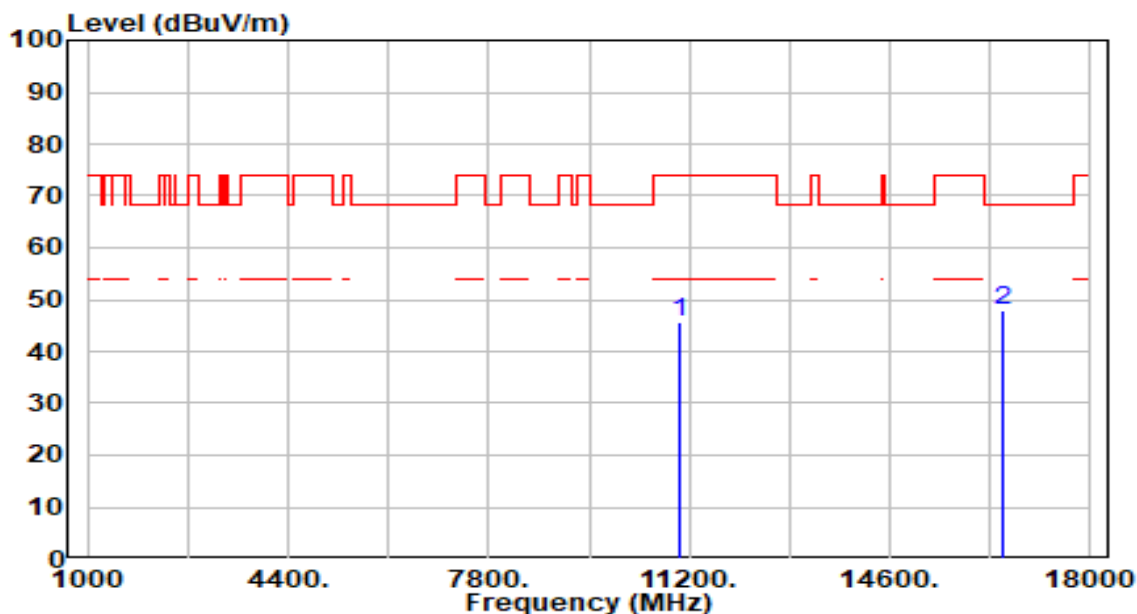


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	39.18	6.33	45.51	-28.49	74.00	100	78	Peak
2	* 16530.000	39.78	8.30	48.07	-20.13	68.20	100	63	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

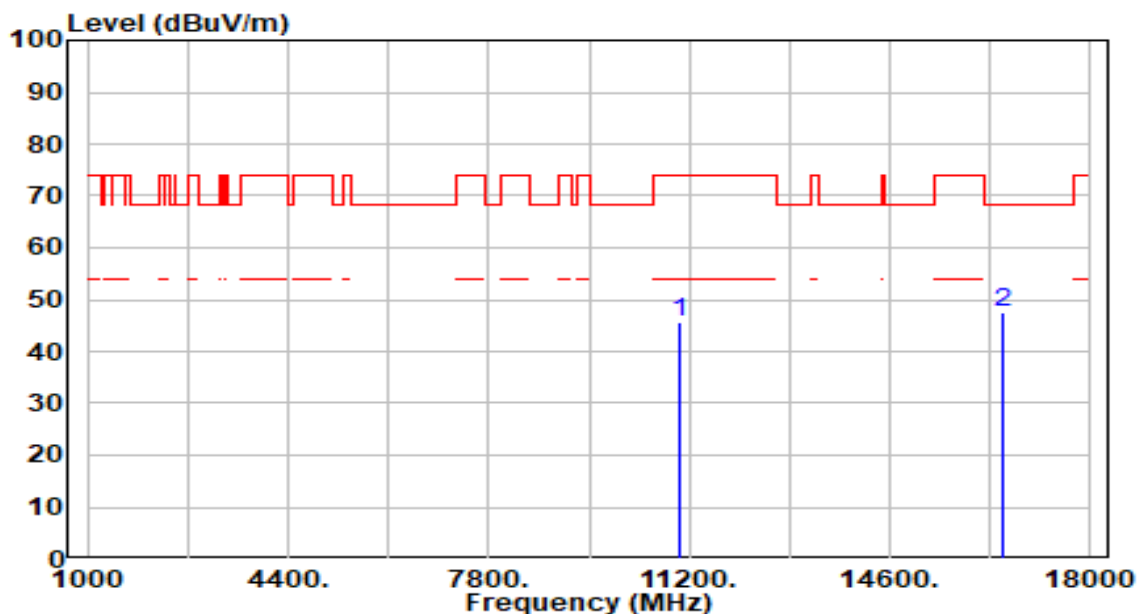


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	39.16	6.33	45.48	-28.52	74.00	100	306	Peak
2	* 16530.000	39.44	8.30	47.73	-20.47	68.20	100	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 0+1+3	Test Voltage	AC 120V/60Hz

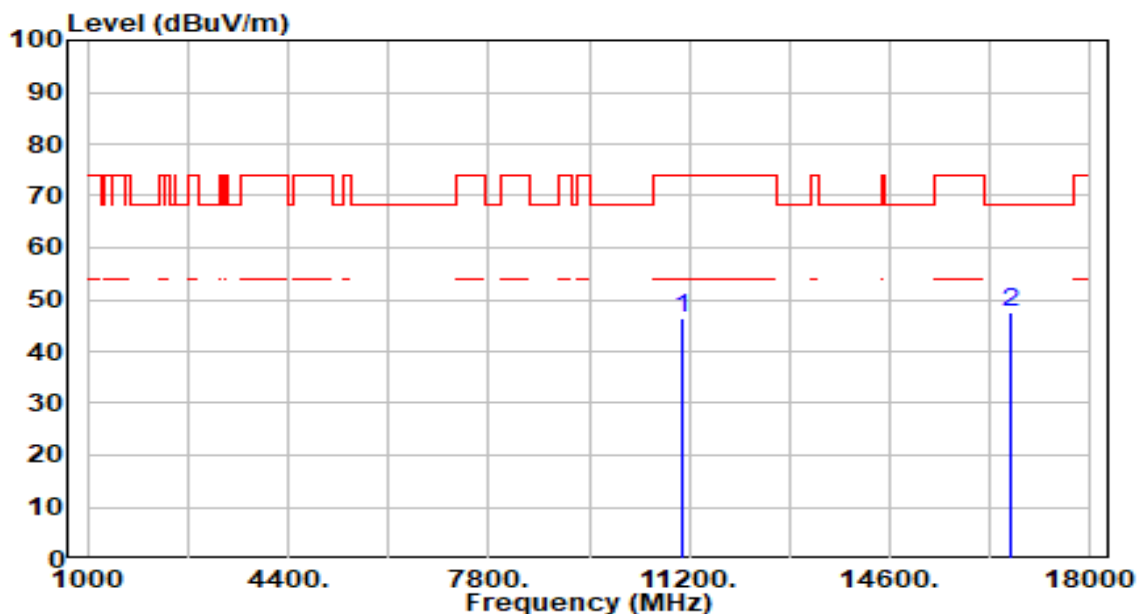


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	39.99	6.56	46.55	-27.45	74.00	100	43	Peak
2	* 16650.000	39.32	8.23	47.55	-20.65	68.20	100	191	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 110_ANT 0+1+3	Test Voltage	AC 120V/60Hz

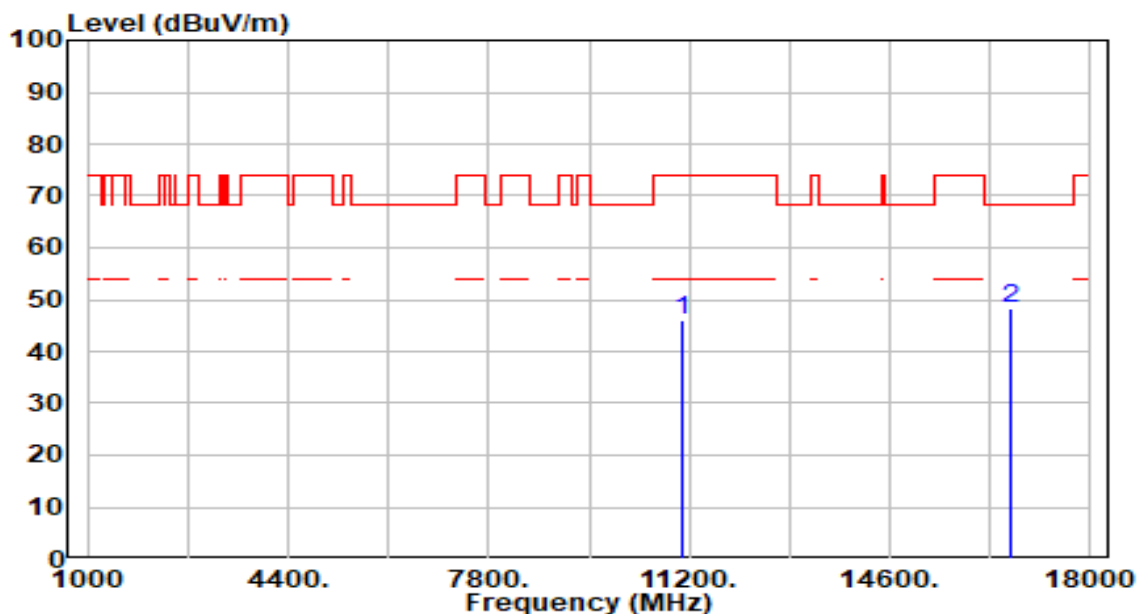


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	39.48	6.56	46.04	-27.96	74.00	100	52	Peak
2	* 16650.000	40.23	8.23	48.46	-19.74	68.20	100	146	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1+3	Test Voltage	AC 120V/60Hz

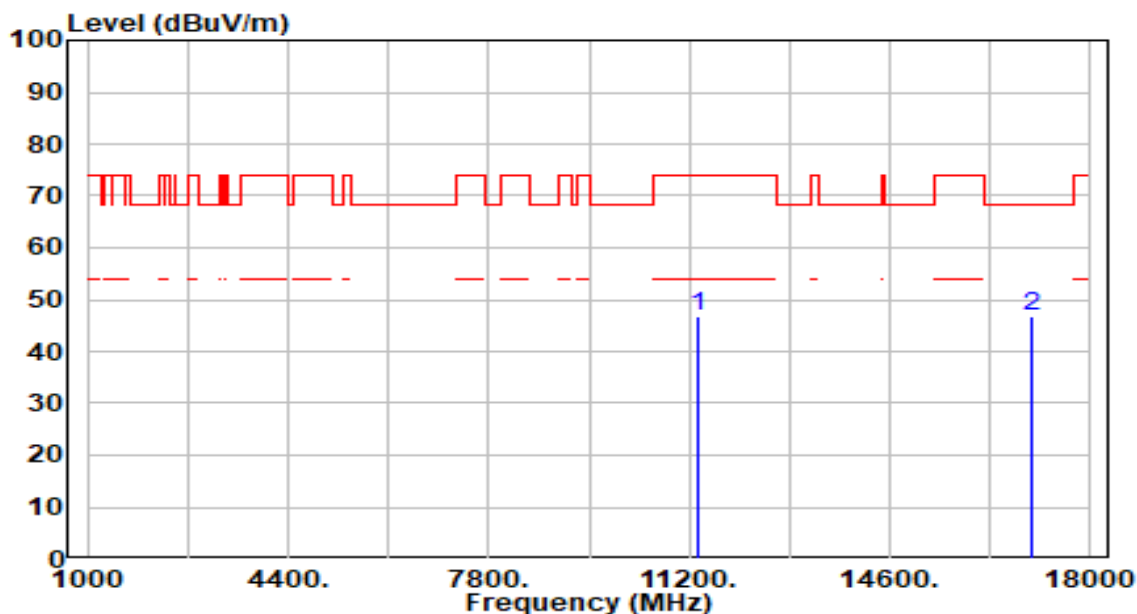


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	39.82	7.08	46.90	-27.10	74.00	100	302	Peak
2	* 17010.000	38.71	8.00	46.71	-21.49	68.20	100	222	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1+3	Test Voltage	AC 120V/60Hz

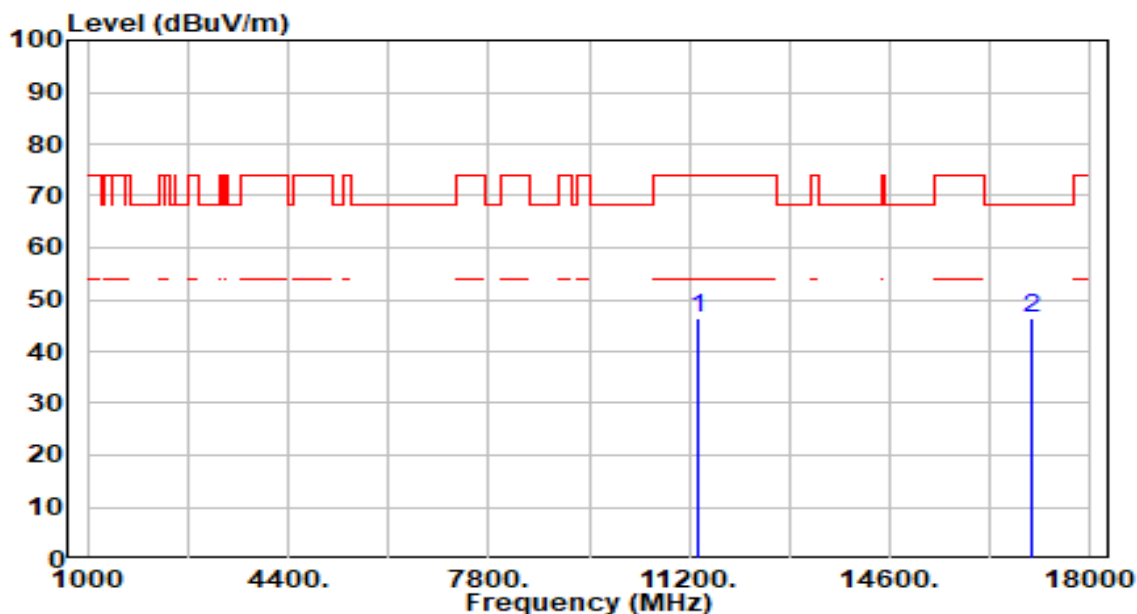


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	39.25	7.08	46.33	-27.67	74.00	100	0	Peak
2	* 17010.000	38.39	8.00	46.39	-21.81	68.20	100	37	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 0+1+3	Test Voltage	AC 120V/60Hz

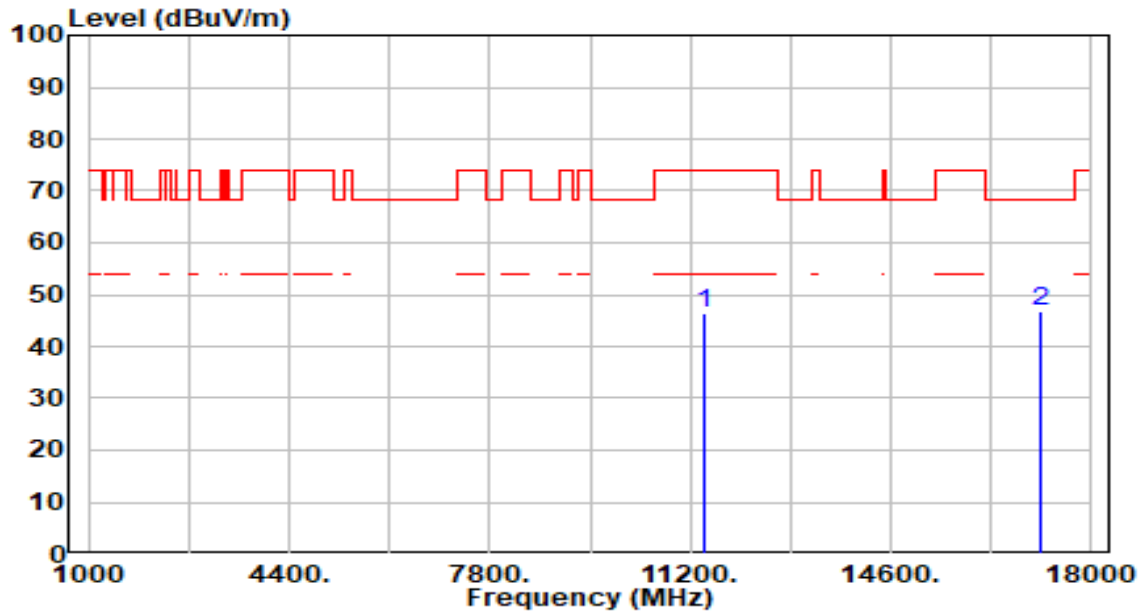


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	39.36	7.14	46.51	-27.49	74.00	100	57	Peak
2	*	17130.000	39.04	7.71	46.75	-21.45	68.20	100	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 142_ANT 0+1+3	Test Voltage	AC 120V/60Hz

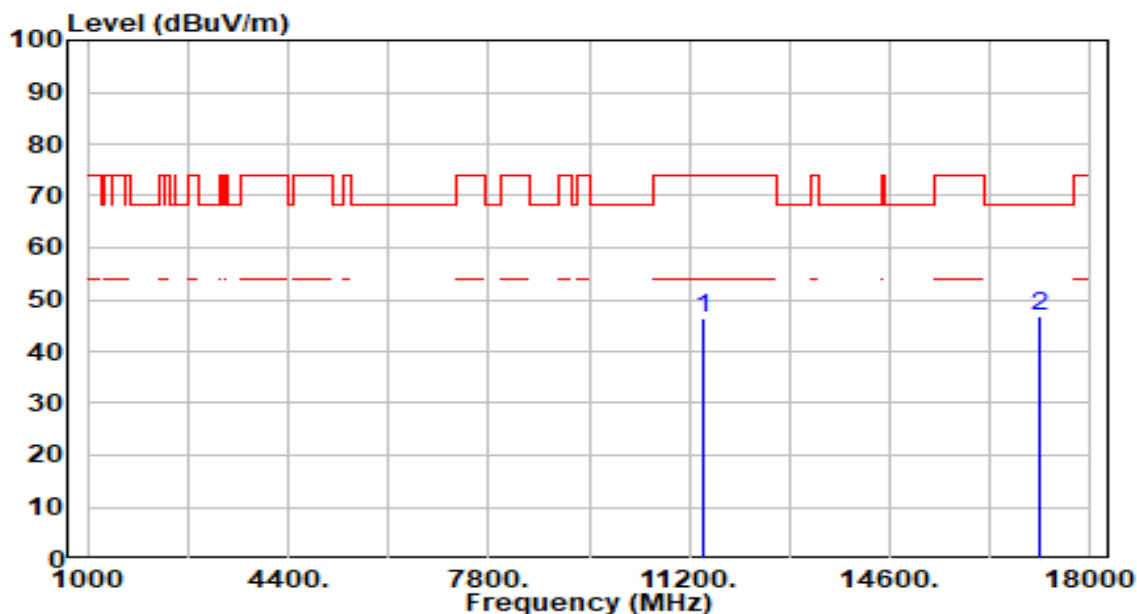


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11420.000	39.11	7.14	46.25	-27.75	74.00	100	224	Peak
2	*	17130.000	39.06	7.71	46.77	-21.43	68.20	100	351	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1+3	Test Voltage	AC 120V/60Hz

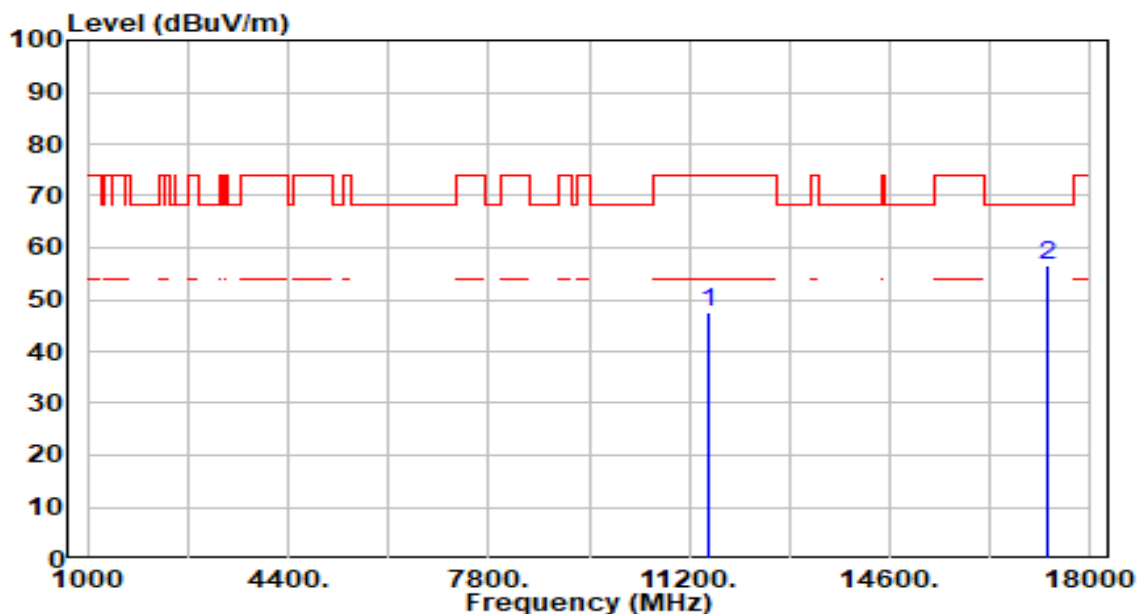


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	40.33	7.19	47.52	-26.48	74.00	300	318	Peak
2	*	17265.000	49.10	7.46	56.57	-11.63	68.20	300	58	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1+3	Test Voltage	AC 120V/60Hz

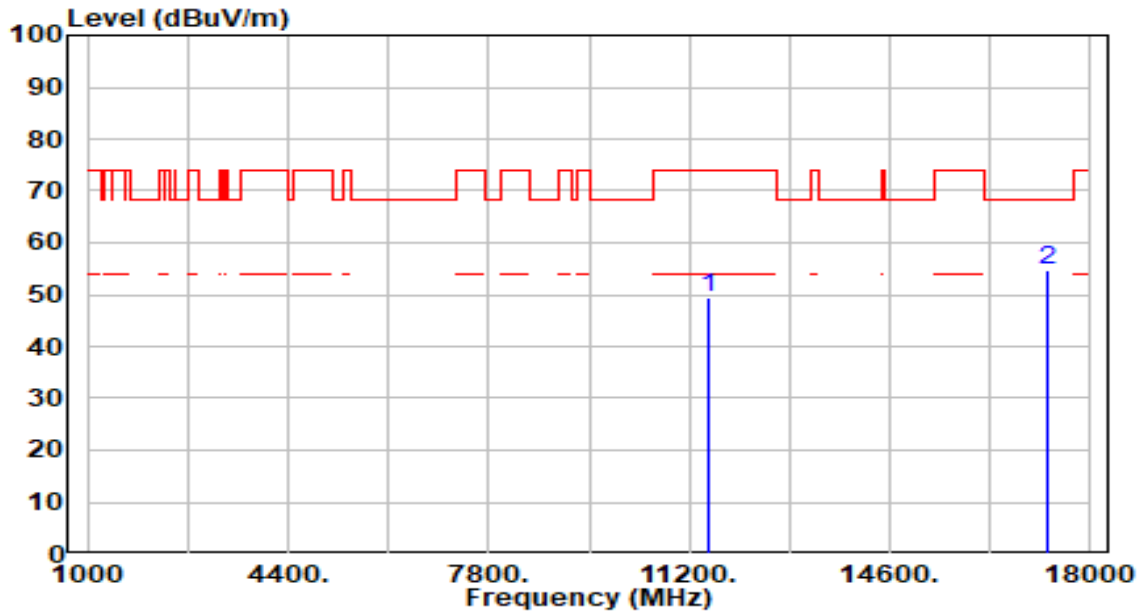


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11510.000	42.19	7.19	49.38	-24.62	74.00	100	291	Peak
2	*	17265.000	47.25	7.46	54.72	-13.48	68.20	100	9	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1+3	Test Voltage	AC 120V/60Hz

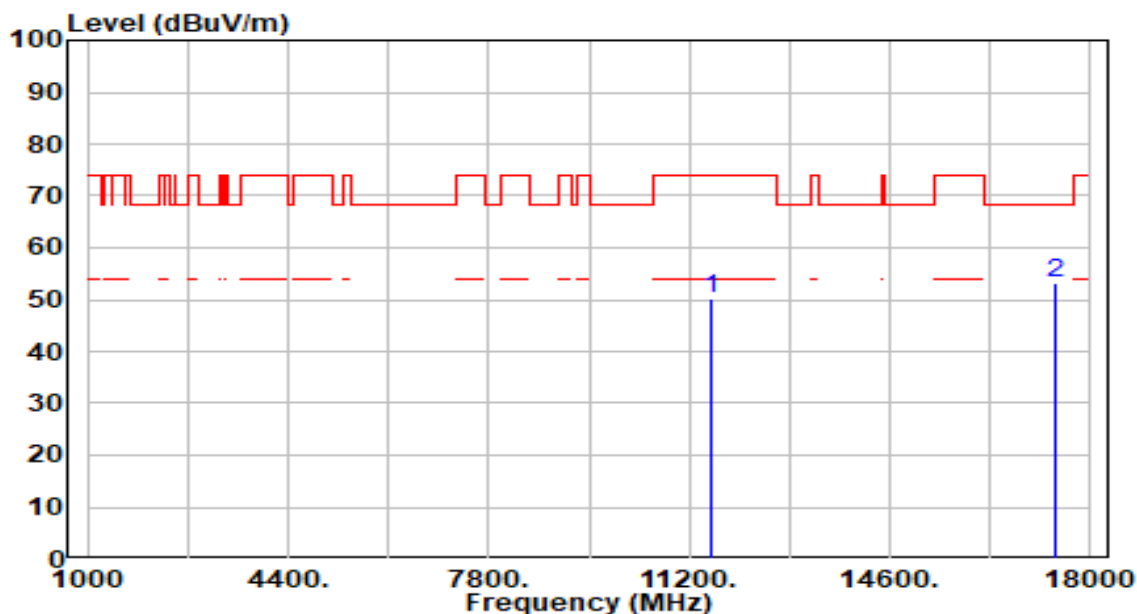


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11590.000	43.03	7.27	50.30	-23.70	74.00	300	316	Peak
2	*	17385.000	46.08	7.20	53.28	-14.92	68.20	300	57	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1+3	Test Voltage	AC 120V/60Hz

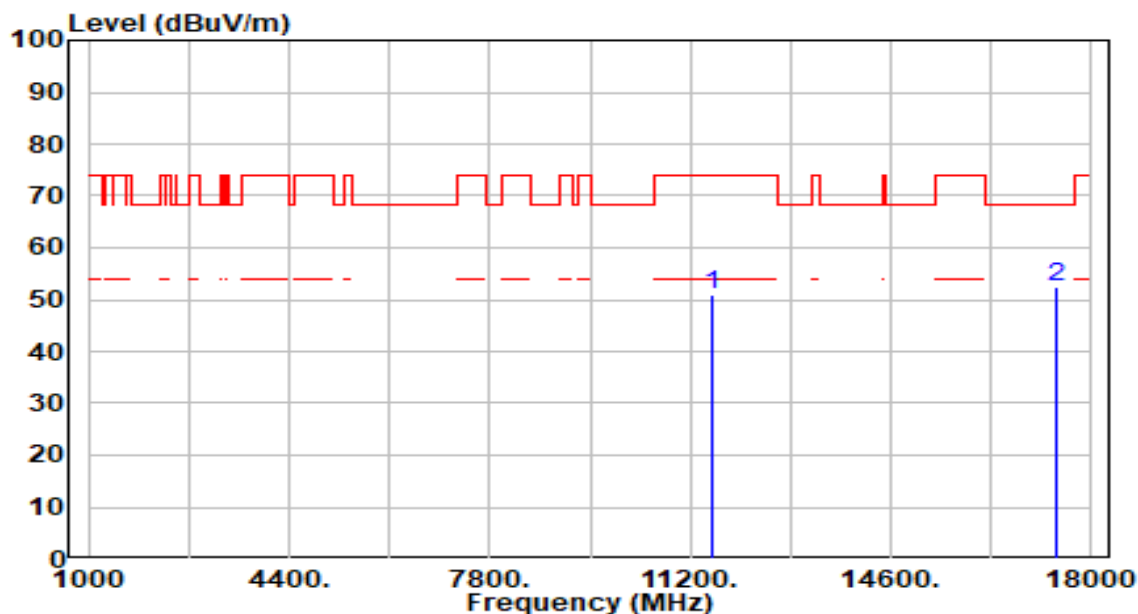


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	43.85	7.27	51.12	-22.88	74.00	100	291	Peak
2	* 17385.000	45.32	7.20	52.52	-15.68	68.20	100	136	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

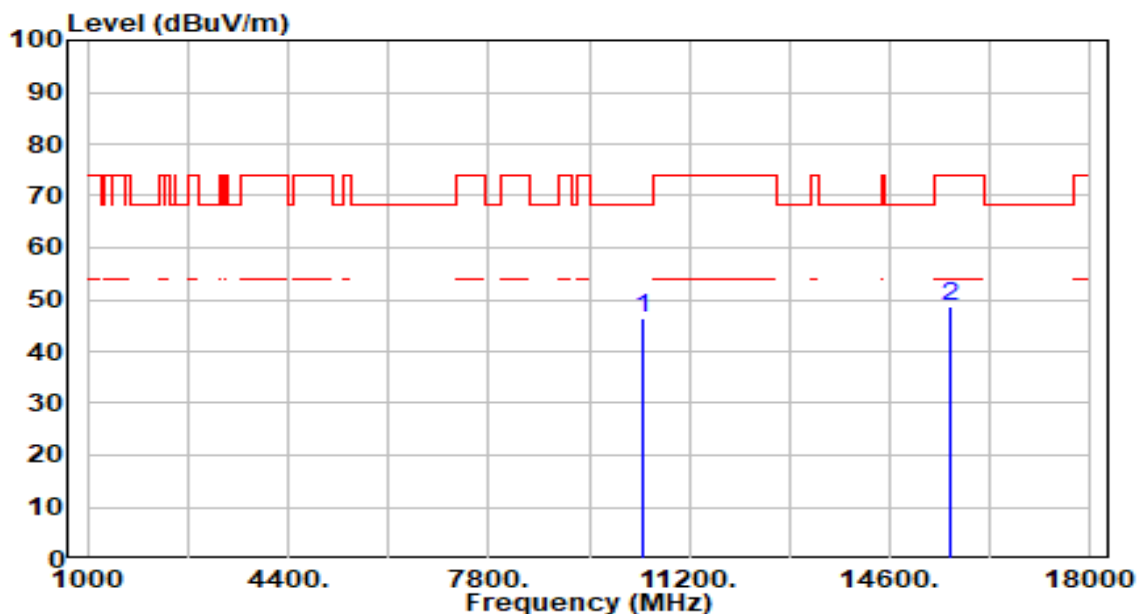


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.08	6.51	46.59	-21.61	68.20	100	247	Peak
2		15630.000	40.17	8.40	48.57	-25.43	74.00	100	286	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

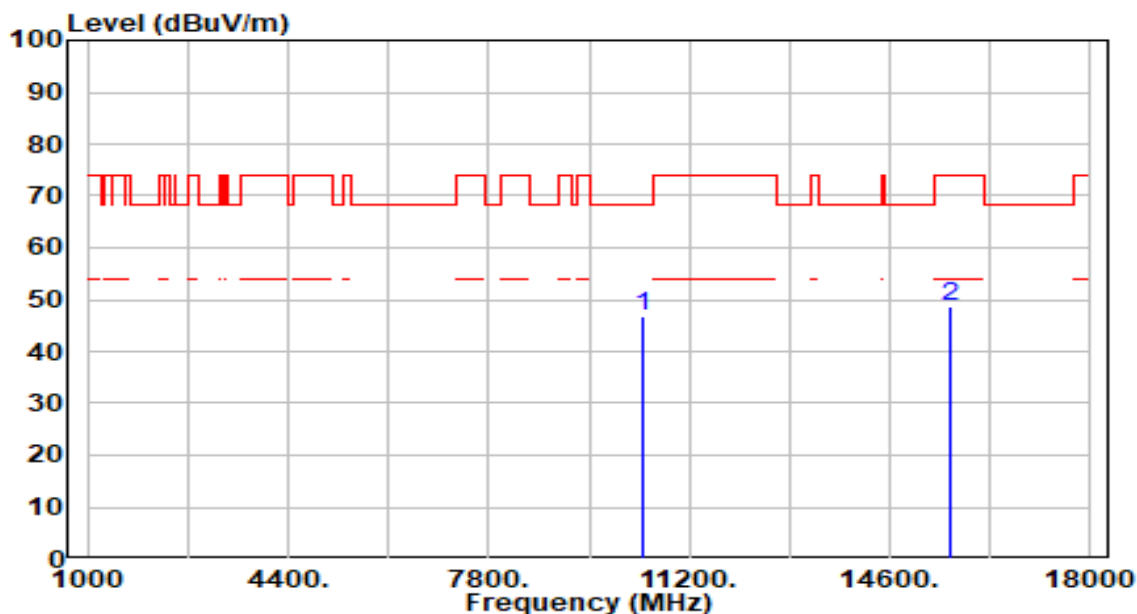


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	40.20	6.51	46.72	-21.48	68.20	100	55	Peak
2		15630.000	40.45	8.40	48.85	-25.15	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

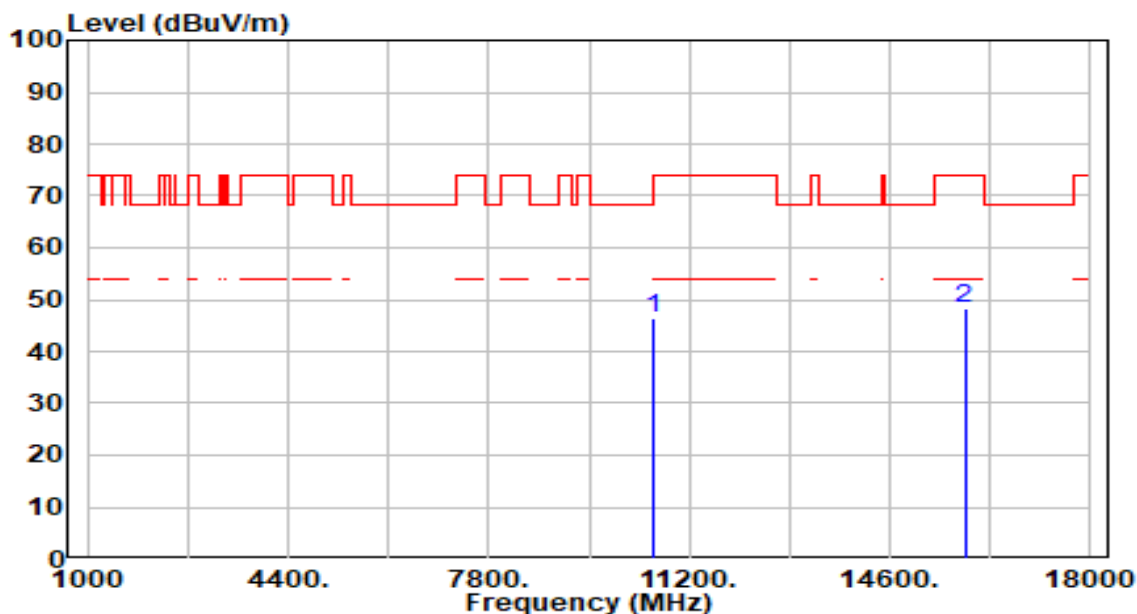


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	39.96	6.37	46.34	-21.86	68.20	100	129	Peak
2		15870.000	39.30	8.89	48.19	-25.81	74.00	100	117	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

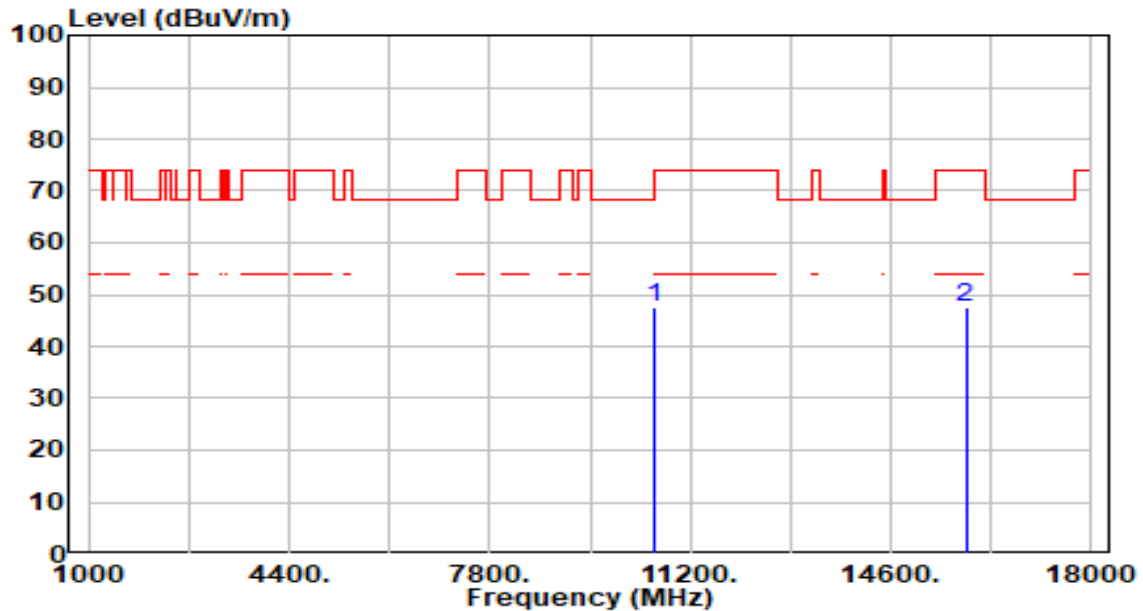


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.05	6.37	47.42	-20.78	68.20	100	293	Peak
2		15870.000	38.84	8.89	47.73	-26.27	74.00	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

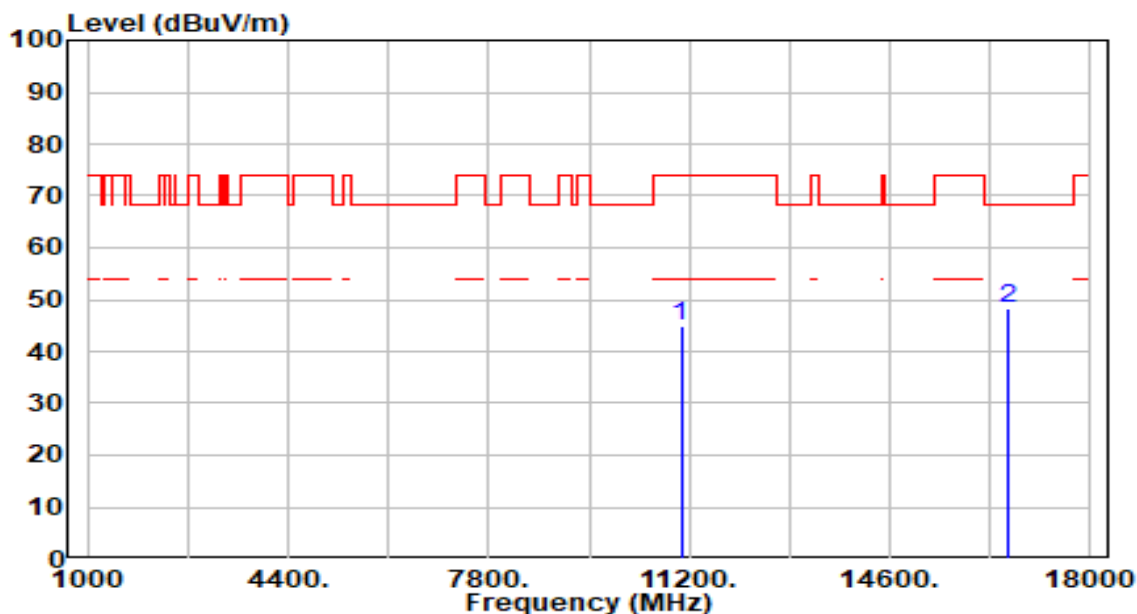


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	38.57	6.44	45.01	-28.99	74.00	100	315	Peak
2	* 16590.000	40.15	8.23	48.38	-19.82	68.20	100	333	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

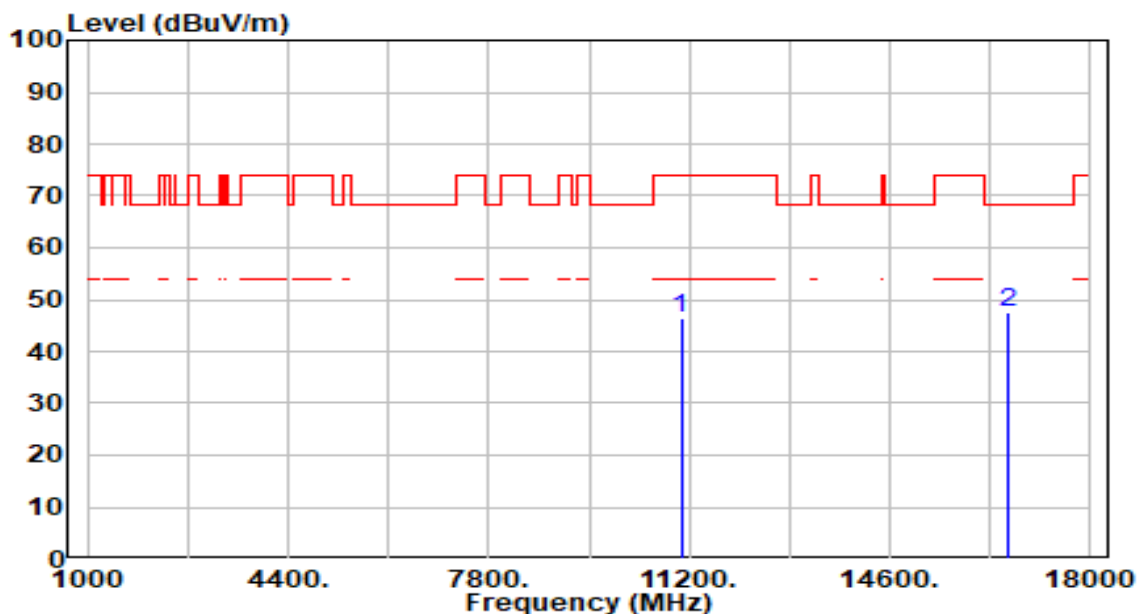


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	39.95	6.44	46.39	-27.61	74.00	100	117	Peak
2	* 16590.000	39.45	8.23	47.68	-20.52	68.20	100	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 0+1+3	Test Voltage	AC 120V/60Hz

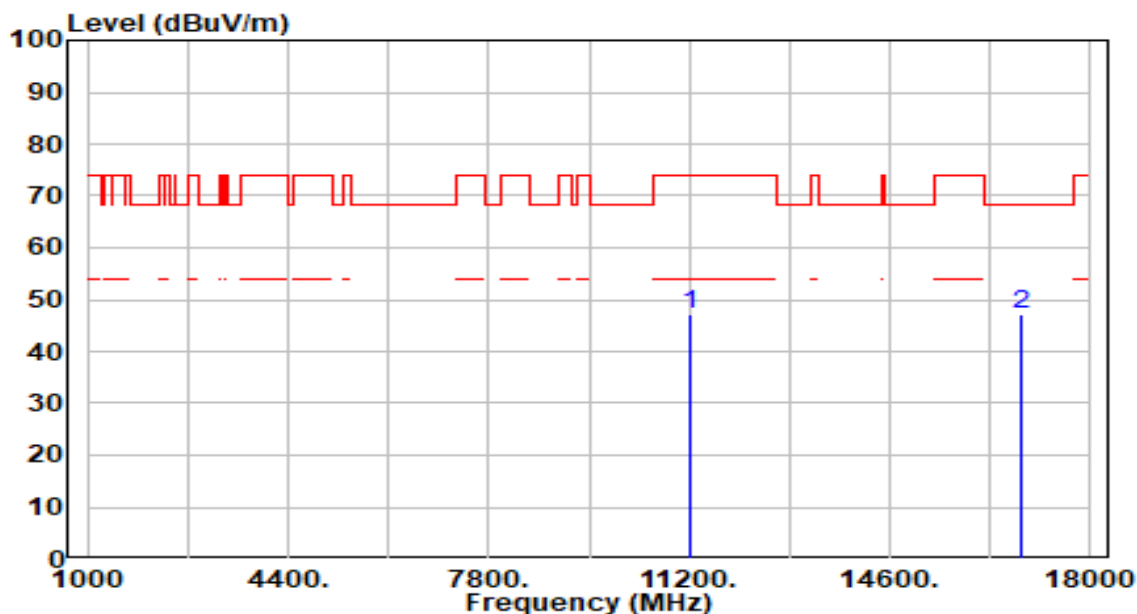


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	40.09	6.92	47.01	-26.99	74.00	100	60	Peak
2	* 16830.000	38.96	8.25	47.21	-20.99	68.20	100	66	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 122_ANT 0+1+3	Test Voltage	AC 120V/60Hz

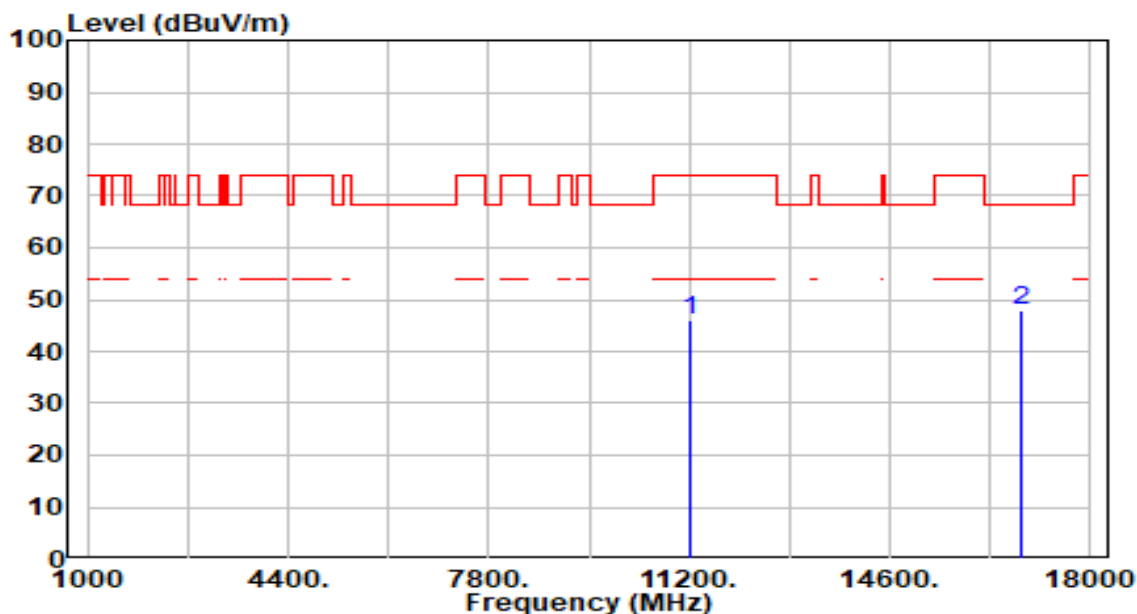


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	39.13	6.92	46.05	-27.95	74.00	100	0	Peak
2	* 16830.000	39.51	8.25	47.77	-20.43	68.20	100	341	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 0+1+3	Test Voltage	AC 120V/60Hz

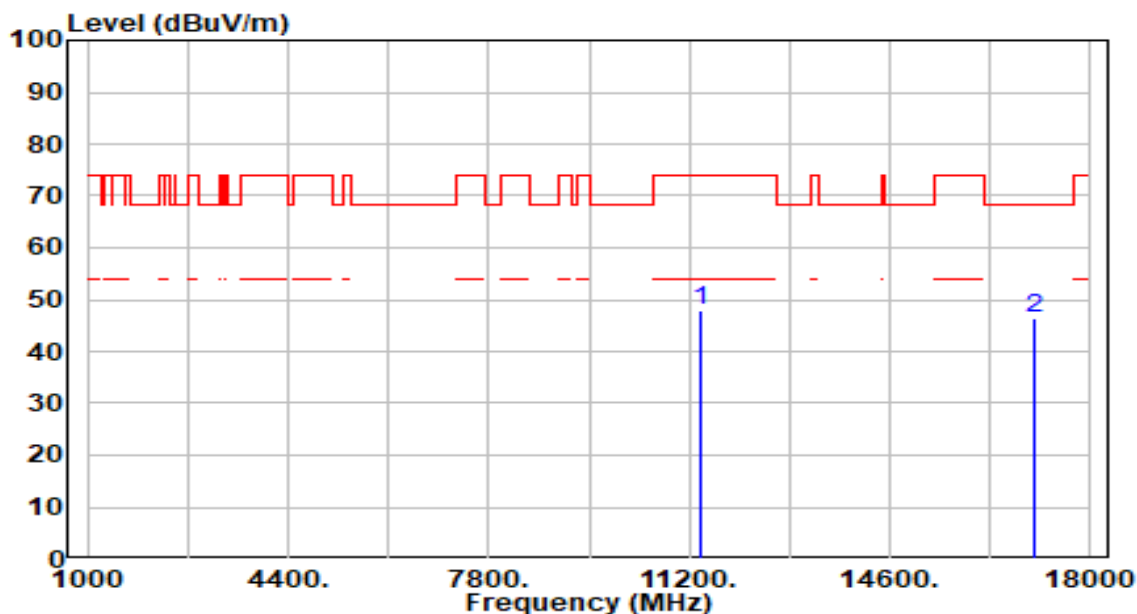


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	40.92	7.12	48.04	-25.96	74.00	100	284	Peak
2	*	17070.000	38.50	7.85	46.34	-21.86	68.20	100	293	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 138_ANT 0+1+3	Test Voltage	AC 120V/60Hz

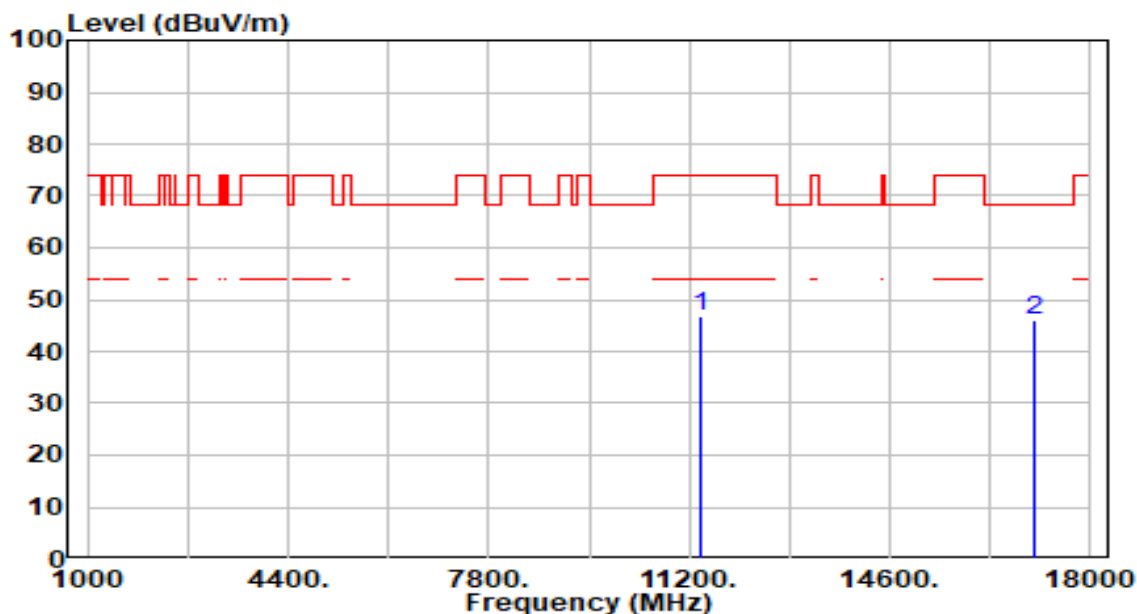


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11380.000	39.59	7.12	46.70	-27.30	74.00	100	0	Peak
2	*	17070.000	38.19	7.85	46.04	-22.16	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1+3	Test Voltage	AC 120V/60Hz

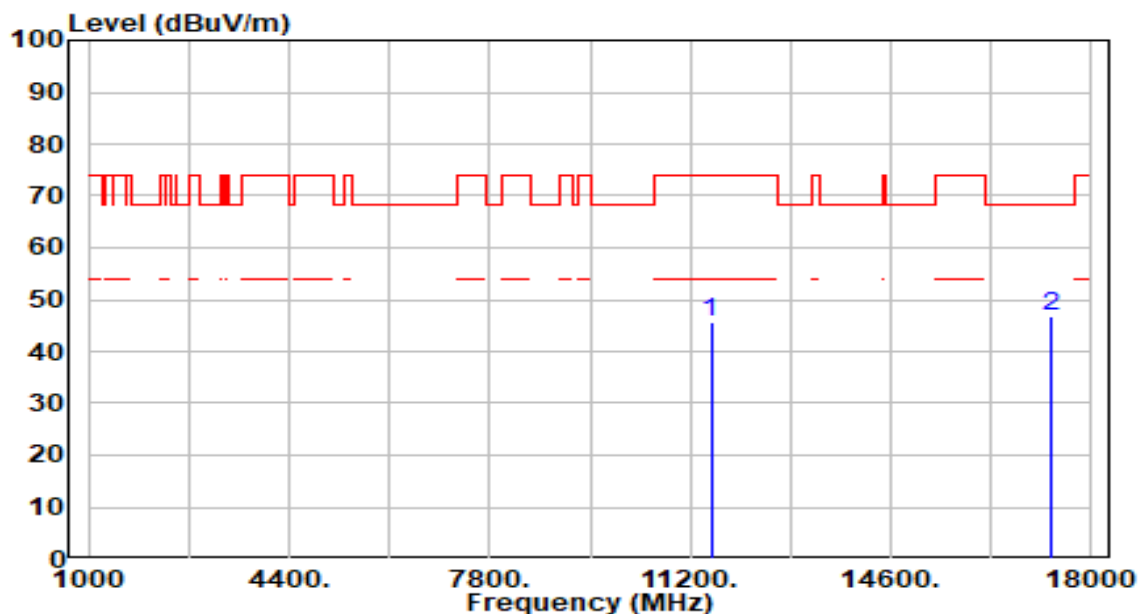


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11550.000	38.39	7.23	45.61	-28.39	74.00	100	65	Peak
2	*	17325.000	39.59	7.35	46.94	-21.26	68.20	100	38	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1+3	Test Voltage	AC 120V/60Hz

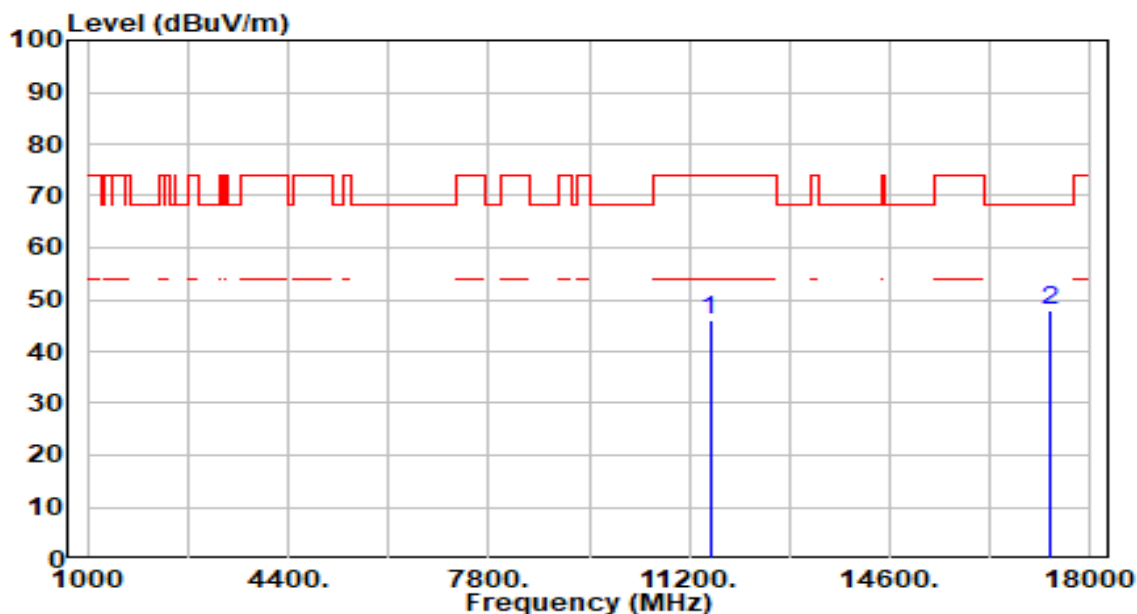


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	38.92	7.23	46.14	-27.86	74.00	100	295	Peak
2	* 17325.000	40.70	7.35	48.06	-20.14	68.20	100	348	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

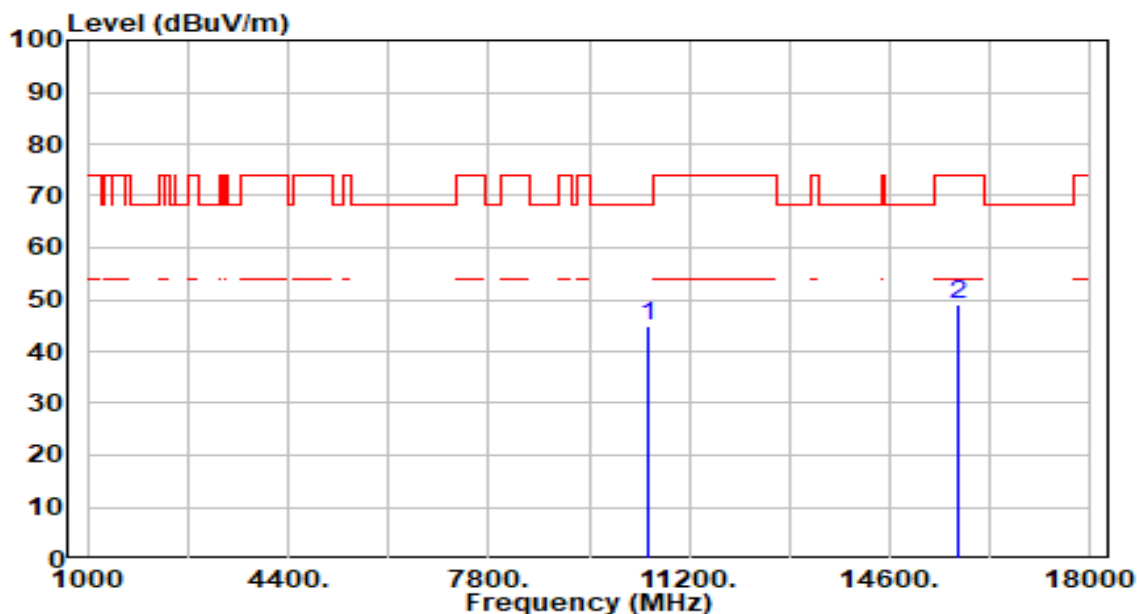


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	38.61	6.42	45.03	-23.17	68.20	100	269	Peak
2		15750.000	40.25	8.67	48.93	-25.07	74.00	100	287	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

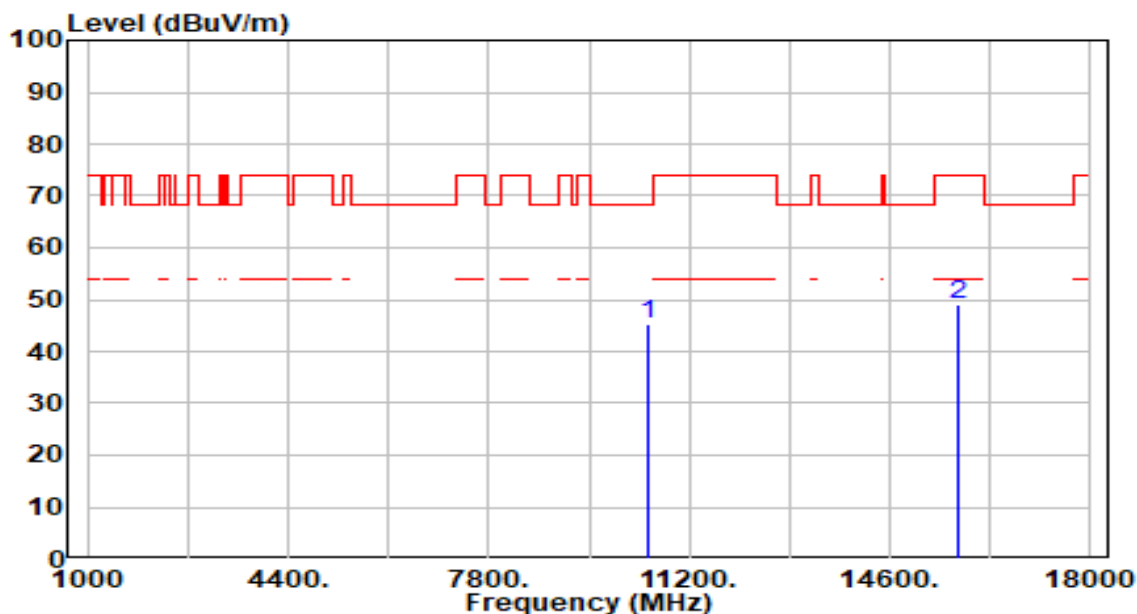


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	38.71	6.42	45.13	-23.07	68.20	100	101	Peak
2		15750.000	40.50	8.67	49.17	-24.83	74.00	100	173	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+3	Test Voltage	AC 120V/60Hz

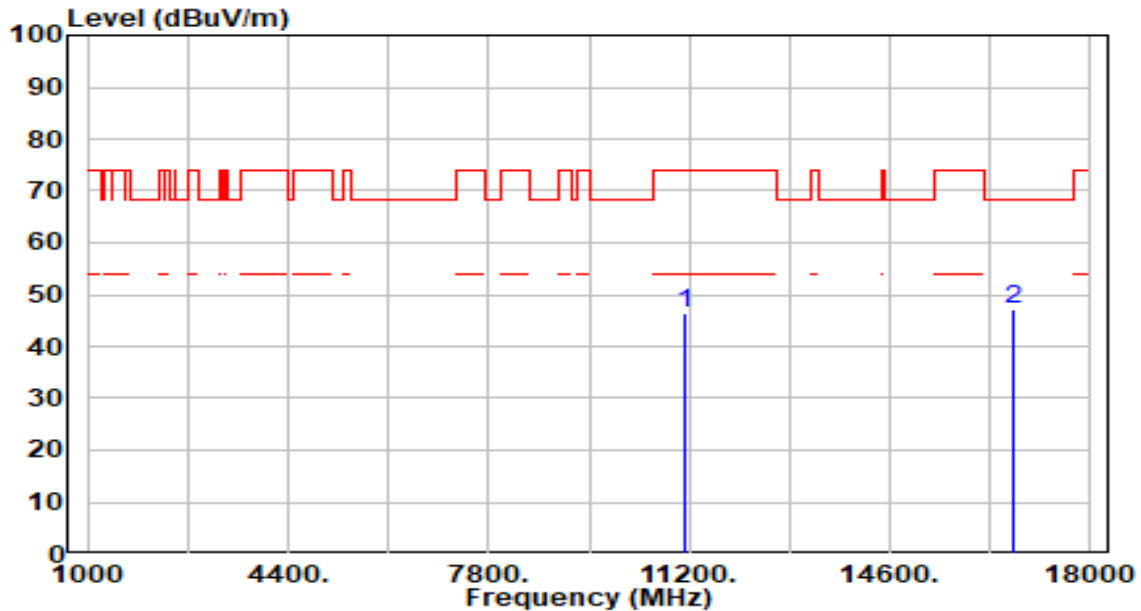


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	39.71	6.69	46.40	-27.60	74.00	100	21	Peak
2	*	16710.000	39.06	8.25	47.31	-20.89	68.20	100	93	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-08
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+3	Test Voltage	AC 120V/60Hz

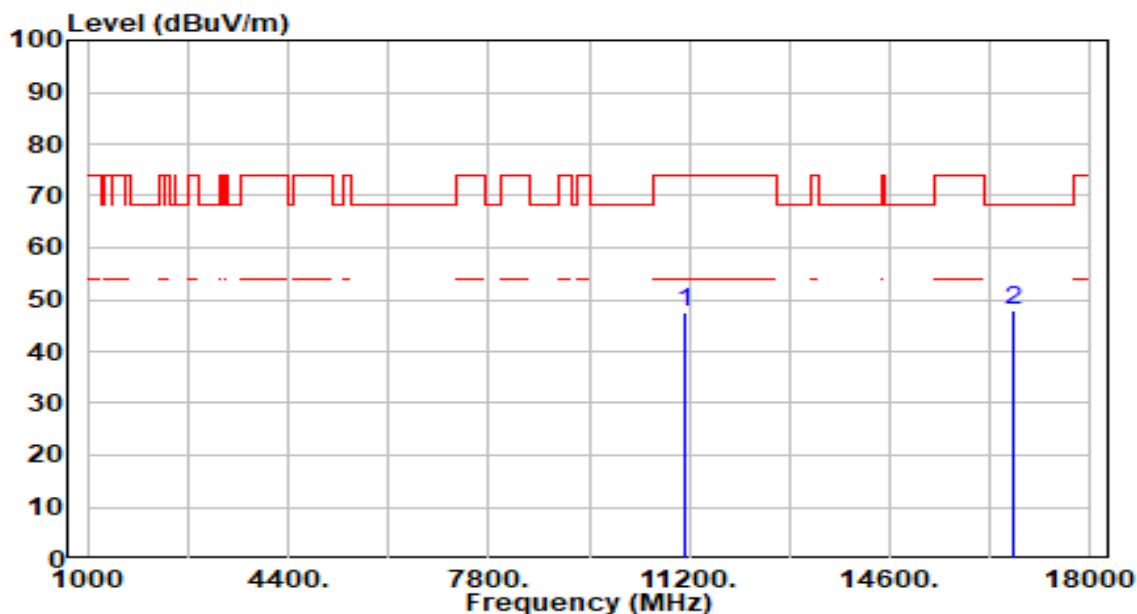


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	40.80	6.69	47.49	-26.51	74.00	100	308	Peak
2	* 16710.000	39.55	8.25	47.80	-20.40	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-10
Factor	BBHA 9170	Temp. / Humidity	25°C /64%
Polarity	Horizontal	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1+3	Test Voltage	AC 120V/60Hz

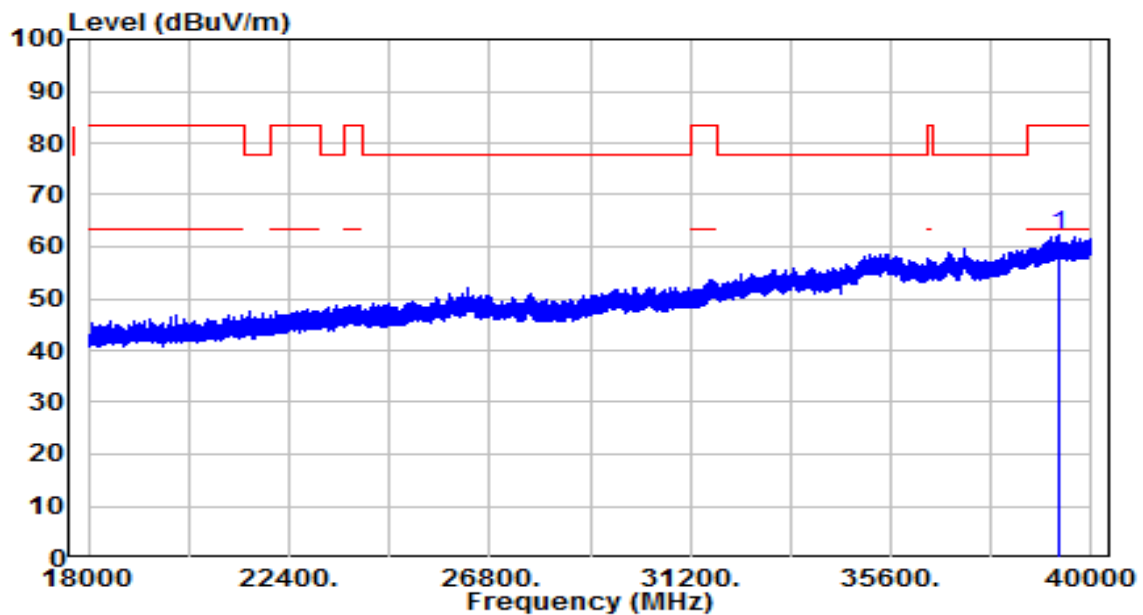


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39267.810	36.92	25.17	62.09	-21.41	83.50	150	199	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-10
Factor	BBHA 9170	Temp. / Humidity	25°C /64%
Polarity	Vertical	Site / Test Engineer	AC2 / Tim
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1+3	Test Voltage	AC 120V/60Hz

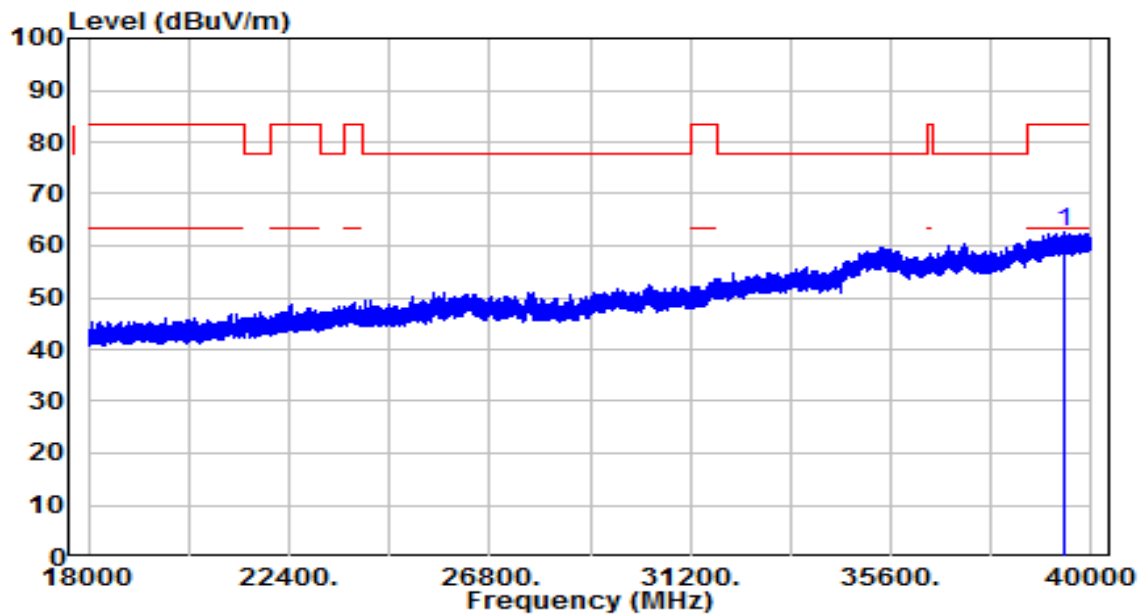

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39430.750	37.03	25.49	62.52	-20.98	83.50	150	158	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing

linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2.Test Procedure Used

KDB 789033 D02v02r01- Section G

7.9.3.Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW $\leq$ RBW/100 (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4.Test Setup

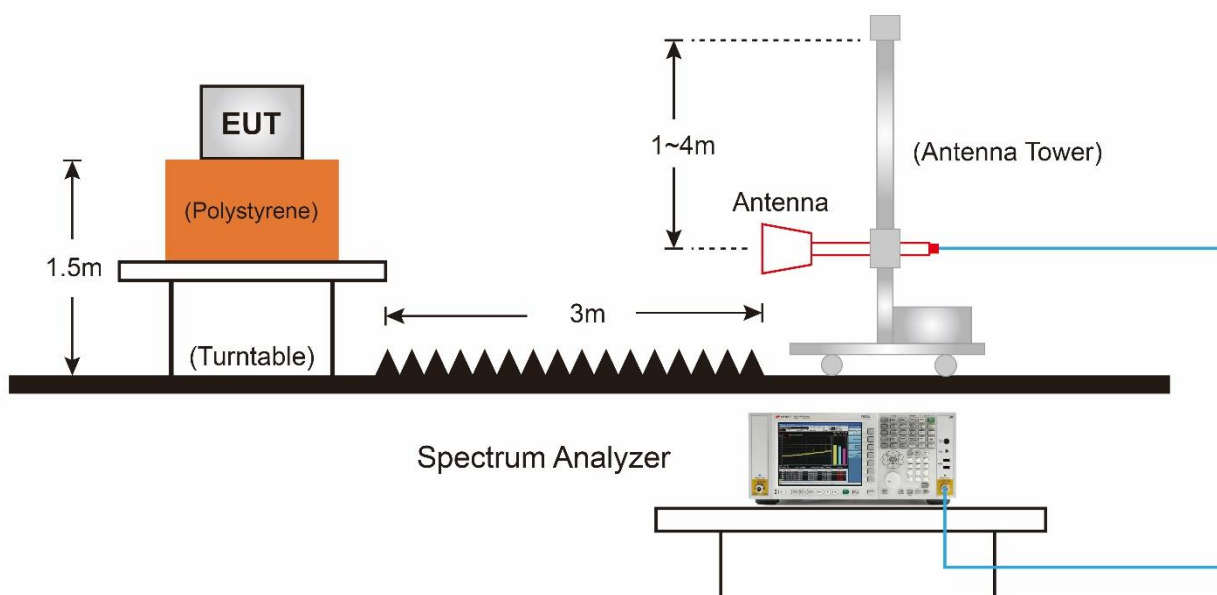

7.9.5.Test Result

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

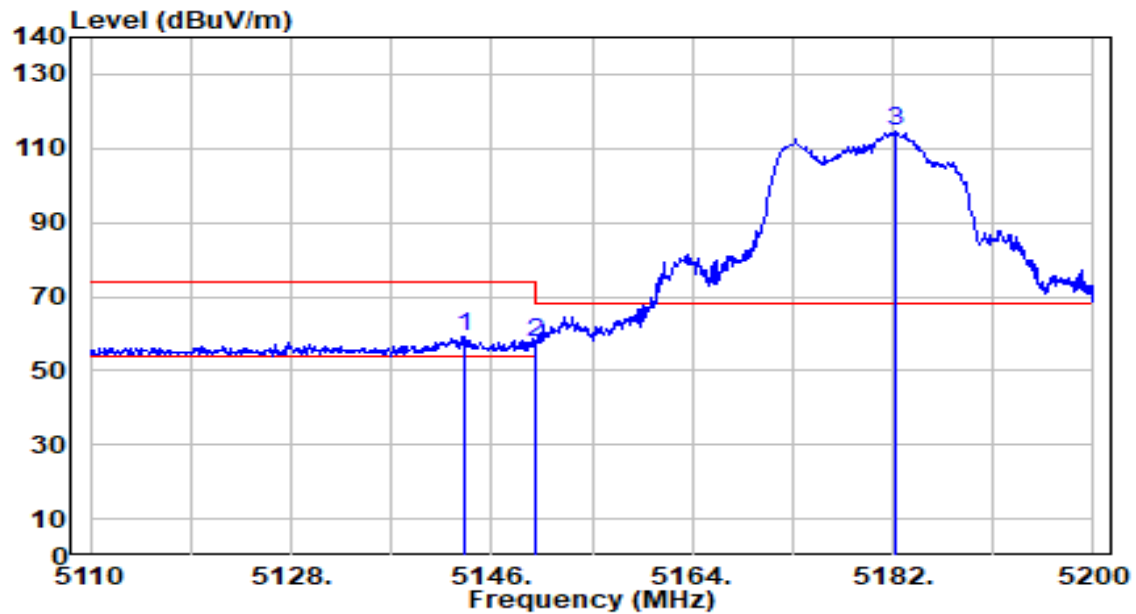


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.660	57.47	1.81	59.28	-14.72	74.00	143	343	Peak
2		5150.000	55.84	1.82	57.65	-16.35	74.00	143	343	Peak
3		5182.180	113.03	1.87	114.90	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

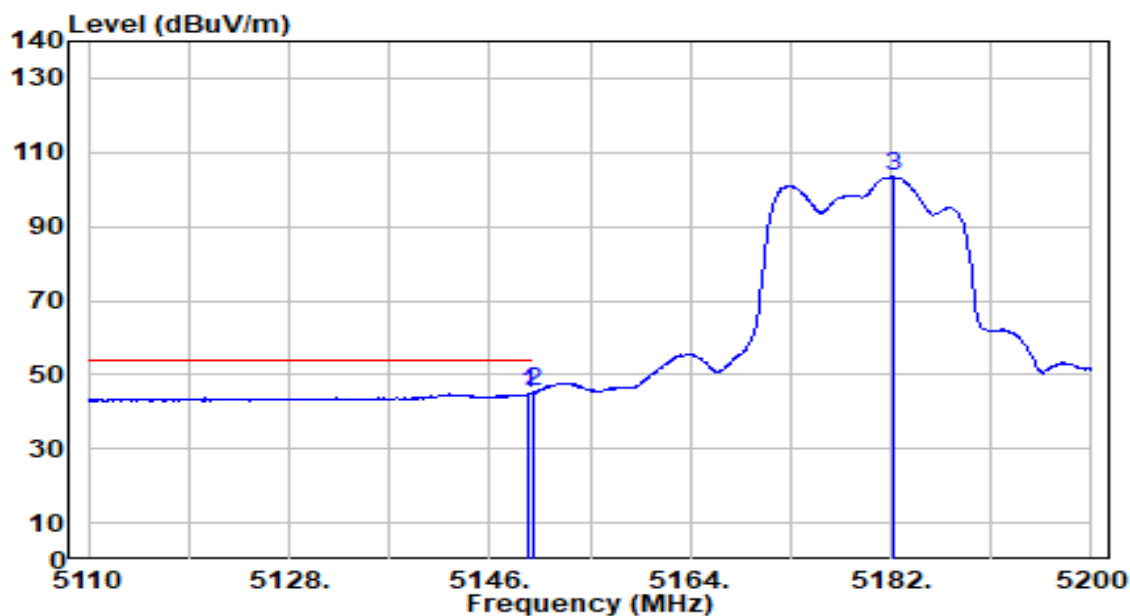


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	42.95	1.82	44.76	-9.24	54.00	143	343	Average
2	*	5150.000	43.55	1.82	45.37	-8.63	54.00	143	343	Average
3		5182.180	101.46	1.87	103.33	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

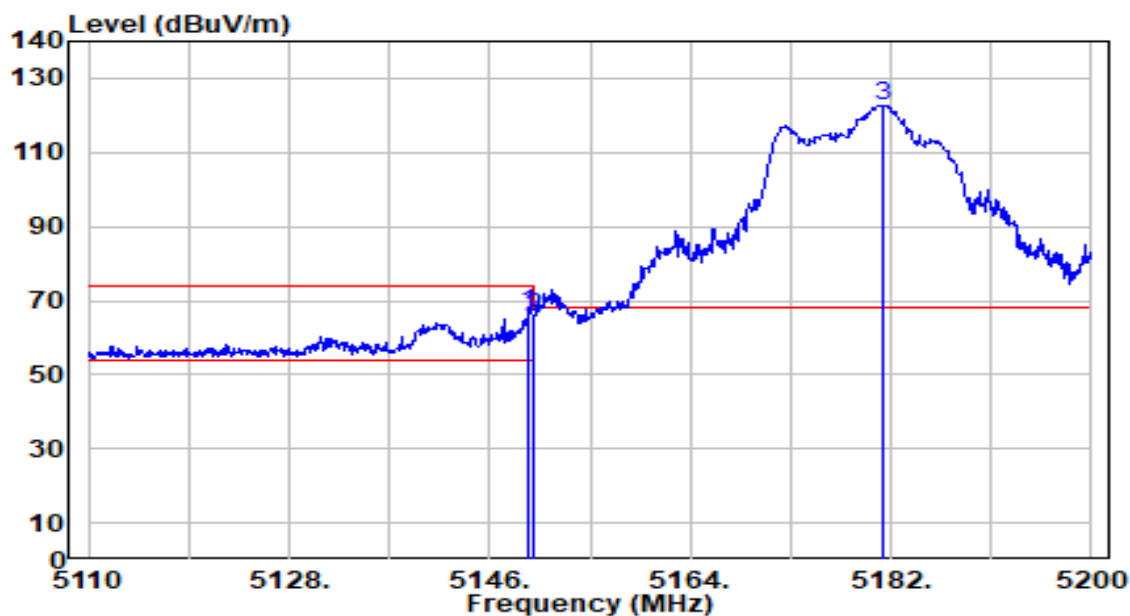


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	64.93	1.82	66.75	-7.25	74.00	195	159	Peak
2		5150.000	63.85	1.82	65.67	-8.33	74.00	195	159	Peak
3		5181.280	120.93	1.87	122.80	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

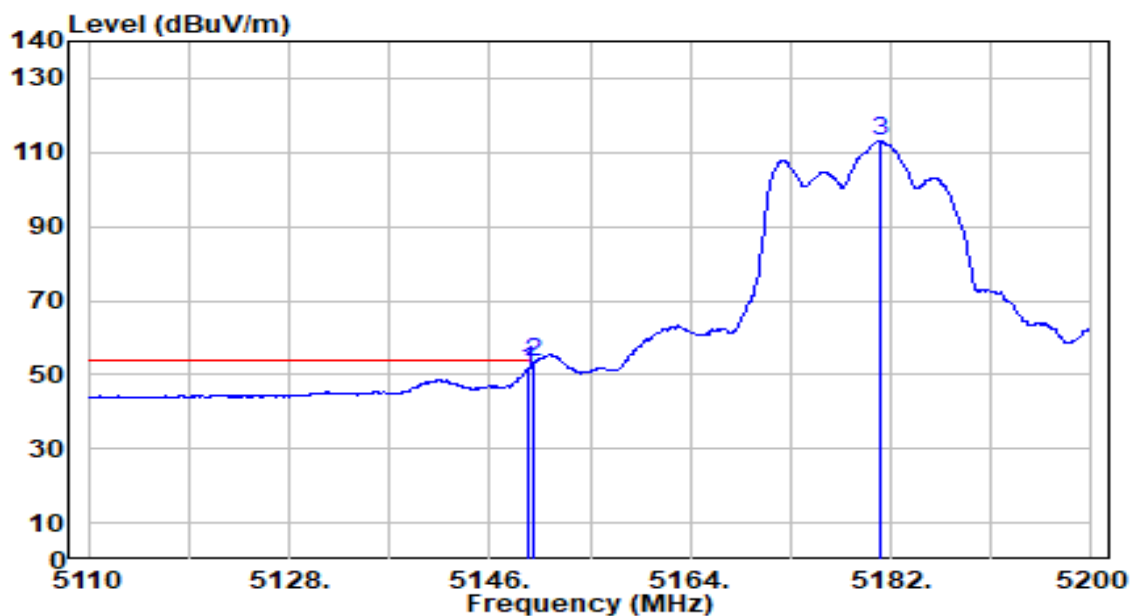


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	49.53	1.82	51.35	-2.65	54.00	195	159	Average
2	*	5150.000	51.61	1.82	53.43	-0.57	54.00	195	159	Average
3		5181.010	111.12	1.87	112.99	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

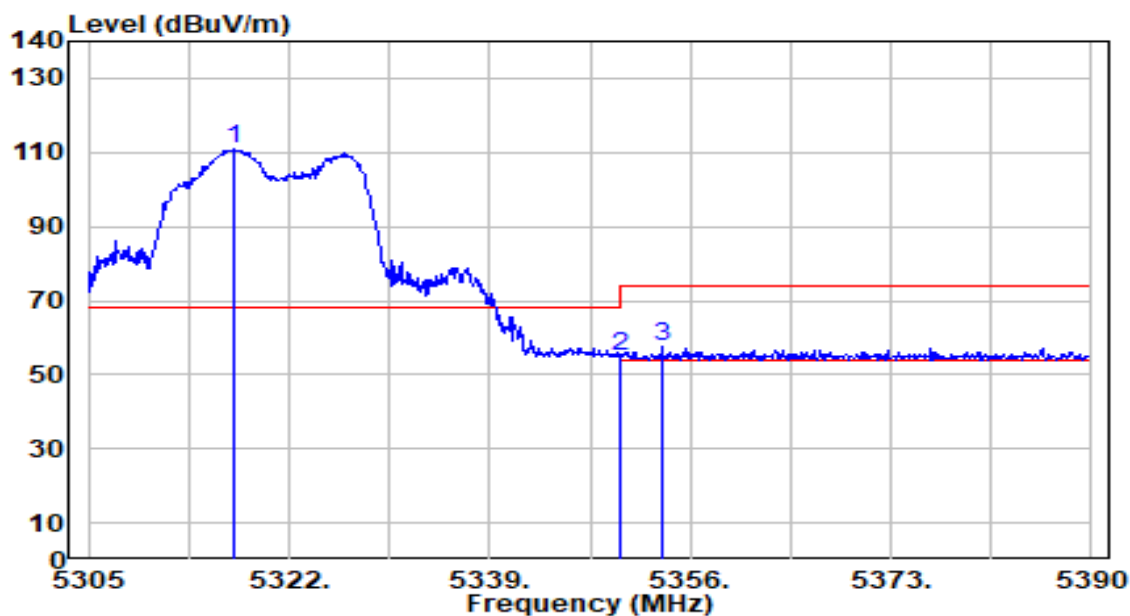


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.240	109.22	1.73	110.96	N/A	N/A	190	277	Peak
2	5350.000	53.02	1.69	54.72	-19.28	74.00	190	277	Peak
3	* 5353.620	55.69	1.69	57.37	-16.63	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

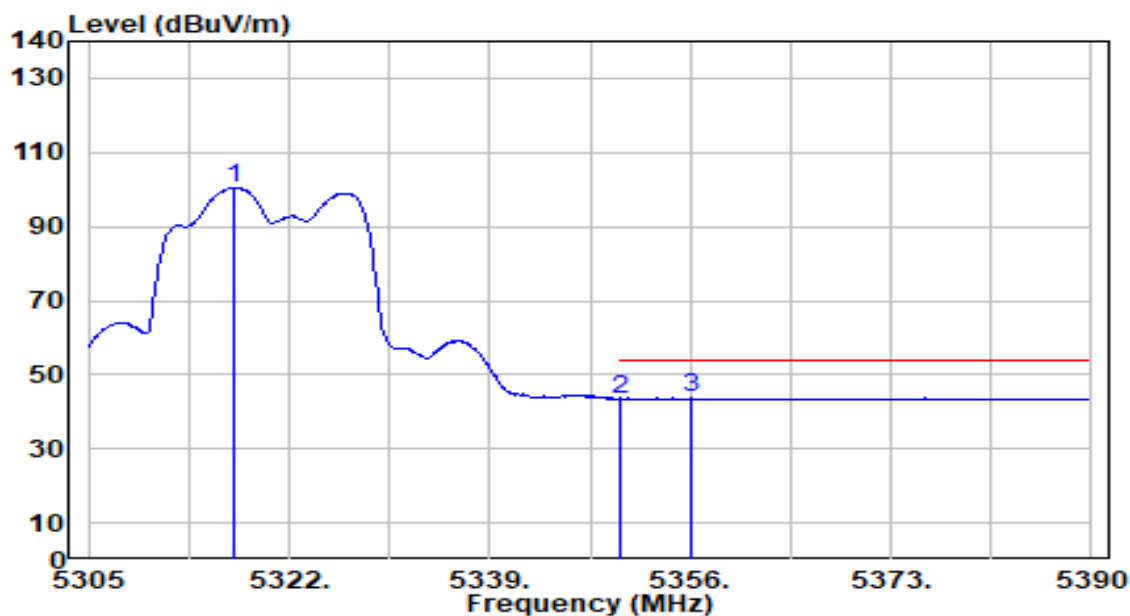


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.325	98.83	1.73	100.56	N/A	N/A	190	277	Average
2	5350.000	41.88	1.69	43.57	-10.43	54.00	190	277	Average
3	* 5356.000	41.96	1.68	43.65	-10.35	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

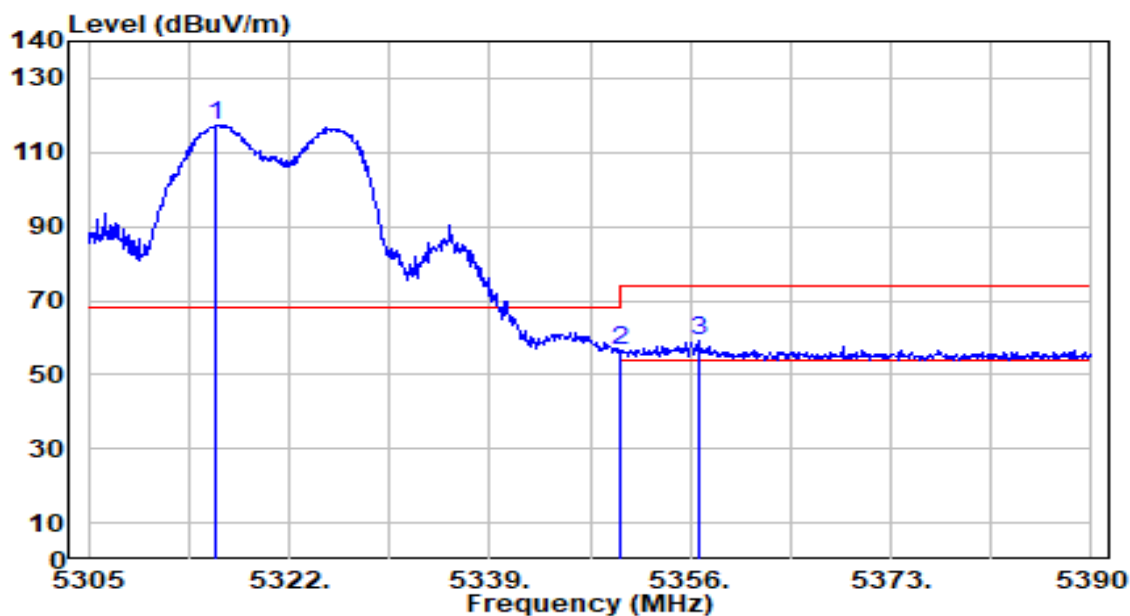


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.795	115.58	1.74	117.32	N/A	N/A	192	247	Peak
2	5350.000	54.59	1.69	56.28	-17.72	74.00	192	247	Peak
3	* 5356.850	57.55	1.68	59.23	-14.77	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

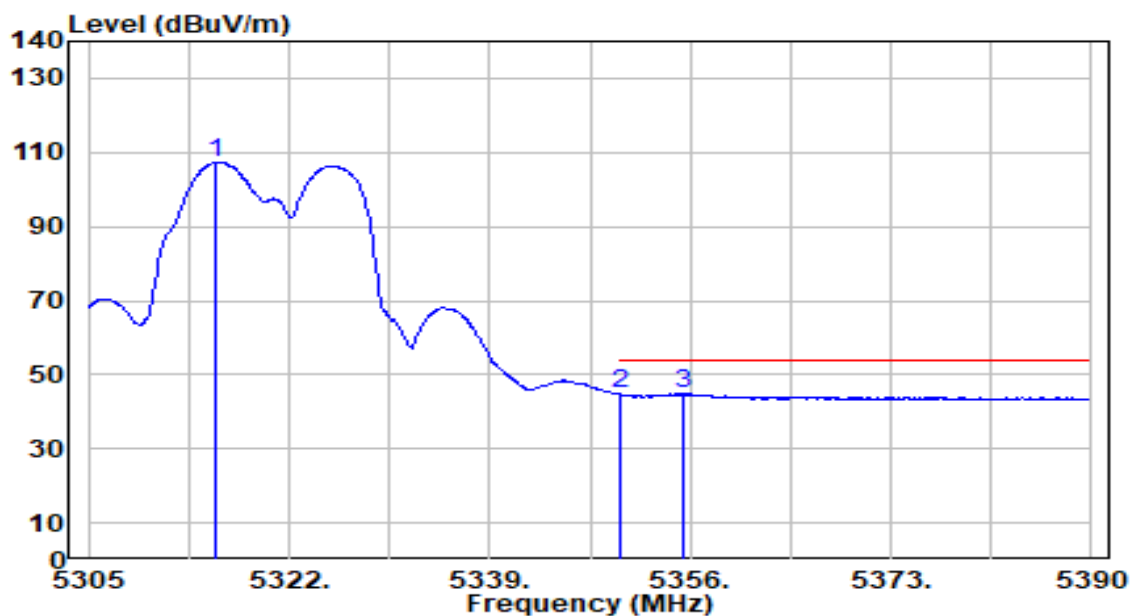


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5315.880	105.66	1.74	107.40	N/A	N/A	192	247	Average
2	5350.000	43.11	1.69	44.80	-9.20	54.00	192	247	Average
3	* 5355.490	43.17	1.68	44.85	-9.15	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

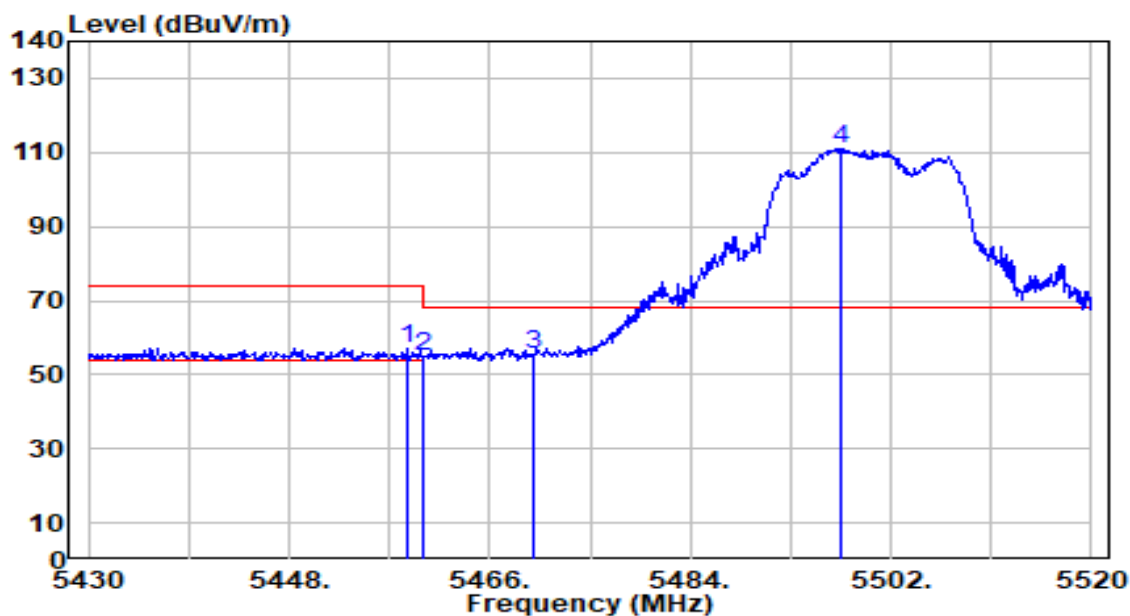


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.620	55.32	1.87	57.18	-16.82	74.00	213	305	Peak
2	5460.000	53.22	1.87	55.09	-18.91	74.00	213	305	Peak
3	* 5470.000	53.36	1.92	55.28	-12.92	68.20	213	305	Peak
4	5497.500	109.17	2.03	111.20	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

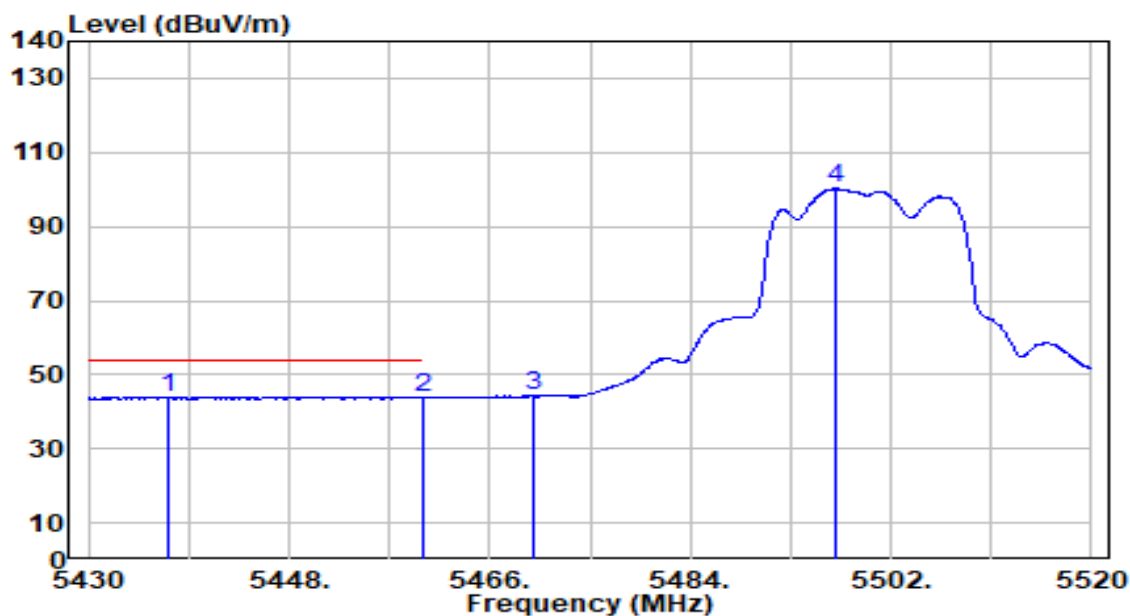


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5437.200	42.26	1.78	44.04	-9.96	54.00	213	305	Average
2		5460.000	41.91	1.87	43.79	-10.21	54.00	213	305	Average
3		5470.000	42.25	1.92	44.16	N/A	N/A	213	305	Average
4		5497.050	98.25	2.03	100.28	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

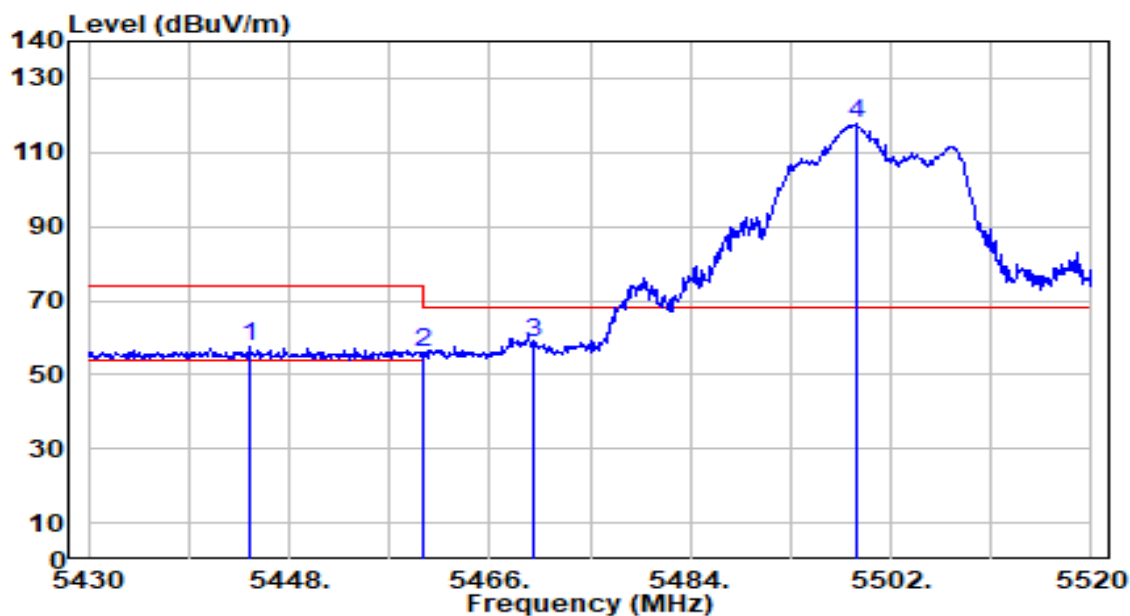


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.400	55.66	1.81	57.47	-16.53	74.00	270	277	Peak
2	5460.000	54.10	1.87	55.98	-18.02	74.00	270	277	Peak
3	* 5470.000	56.79	1.92	58.71	-9.49	68.20	270	277	Peak
4	5499.030	115.53	2.04	117.57	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

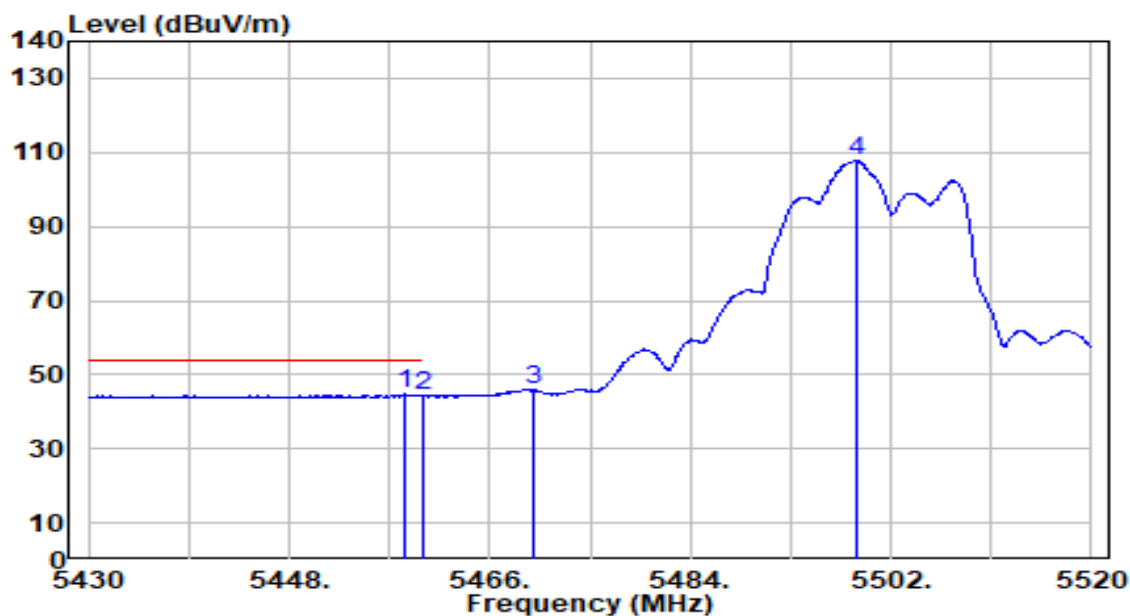


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.350	42.90	1.87	44.76	-9.24	54.00	270	277	Average
2		5460.000	42.48	1.87	44.35	-9.65	54.00	270	277	Average
3		5470.000	43.96	1.92	45.88	N/A	N/A	270	277	Average
4		5498.940	105.64	2.04	107.67	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

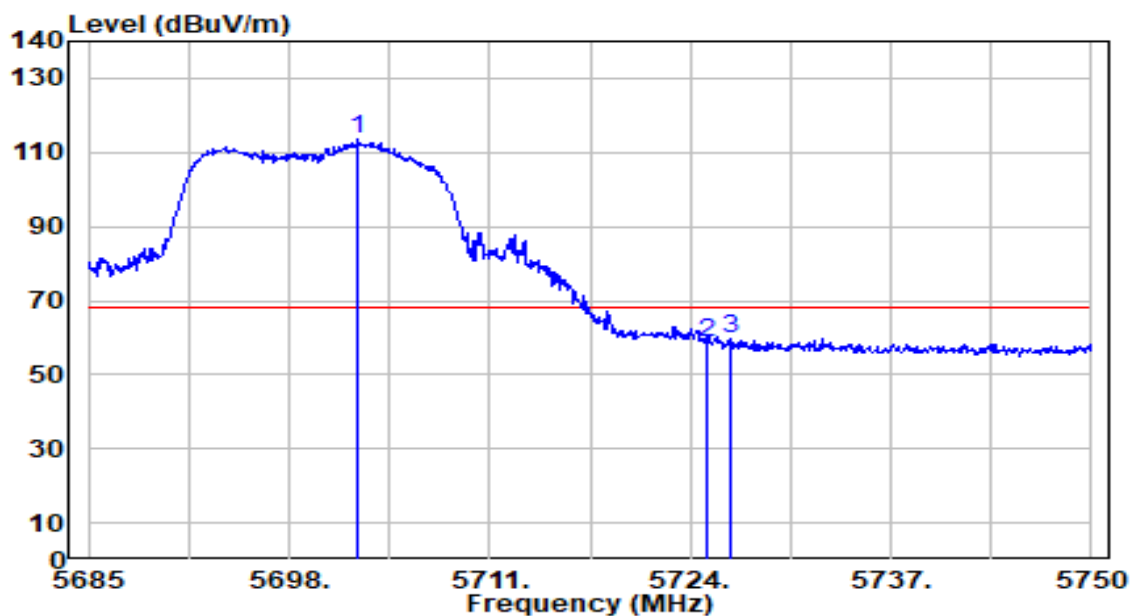


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.485	110.50	3.03	113.53	N/A	N/A	188	304	Peak
2	5725.000	55.45	3.14	58.59	-9.61	68.20	188	304	Peak
3	* 5726.665	56.61	3.15	59.76	-8.44	68.20	188	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

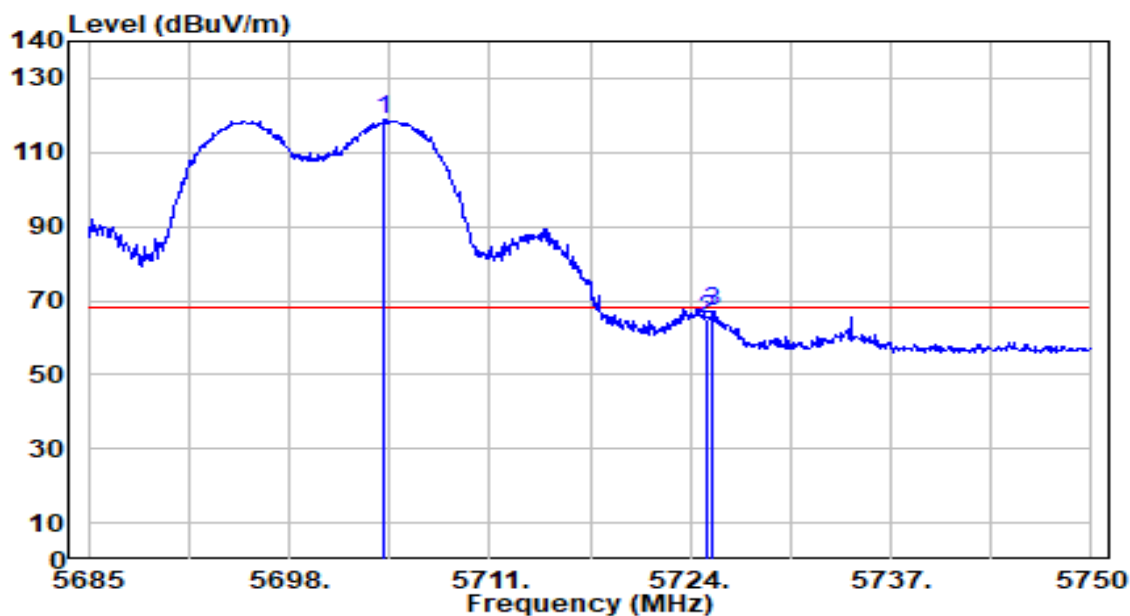


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5704.175	115.82	3.04	118.85	N/A	N/A	157	265	Peak
2	5725.000	62.05	3.14	65.20	-3.00	68.20	157	265	Peak
3	* 5725.495	64.18	3.14	67.32	-0.88	68.20	157	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

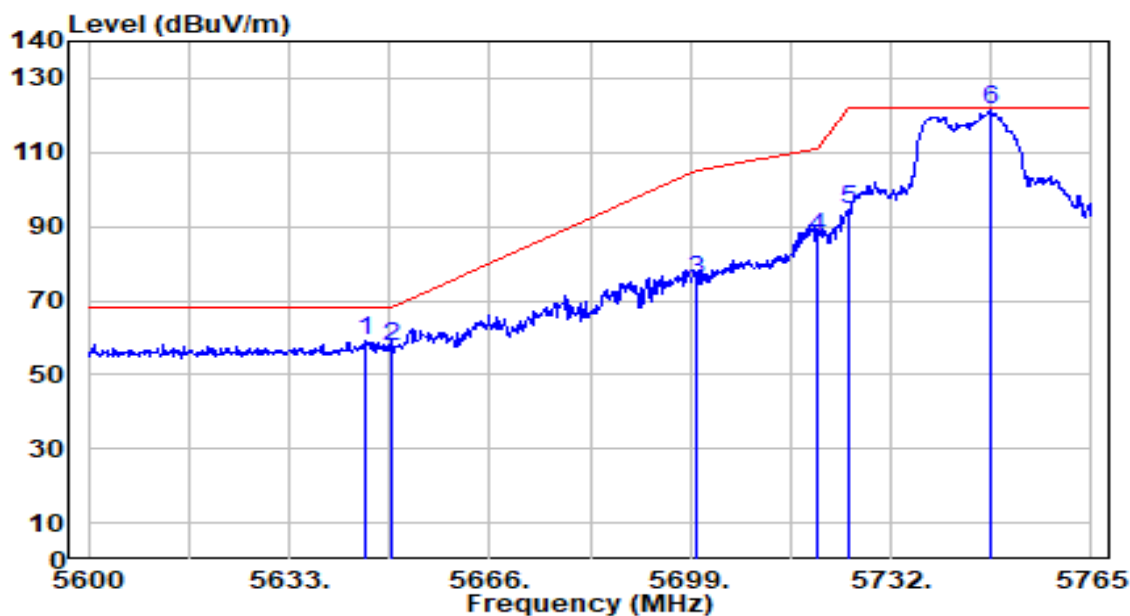


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.375	56.66	2.75	59.42	-8.78	68.20	194	304	Peak
2		5650.000	54.72	2.78	57.50	-10.70	68.20	194	304	Peak
3		5700.000	72.72	3.02	75.73	-29.47	105.20	194	304	Peak
4		5720.000	84.13	3.12	87.24	-23.56	110.80	194	304	Peak
5		5725.000	91.64	3.14	94.78	-27.42	122.20	194	304	Peak
6		5748.500	118.08	3.26	121.34	N/A	N/A	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

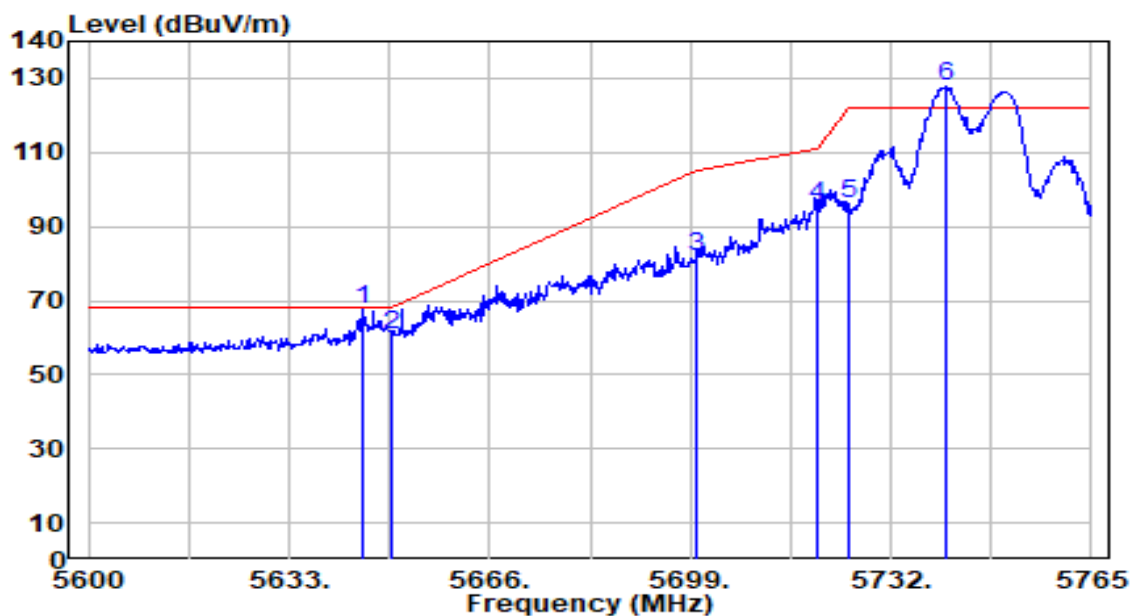


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.045	64.71	2.75	67.47	-0.73	68.20	167	270	Peak
2		5650.000	57.73	2.78	60.51	-7.69	68.20	167	270	Peak
3		5700.000	78.89	3.02	81.90	-23.30	105.20	167	270	Peak
4		5720.000	92.42	3.12	95.53	-15.27	110.80	167	270	Peak
5		5725.000	92.85	3.14	95.99	-26.21	122.20	167	270	Peak
6		5740.910	124.46	3.22	127.68	N/A	N/A	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

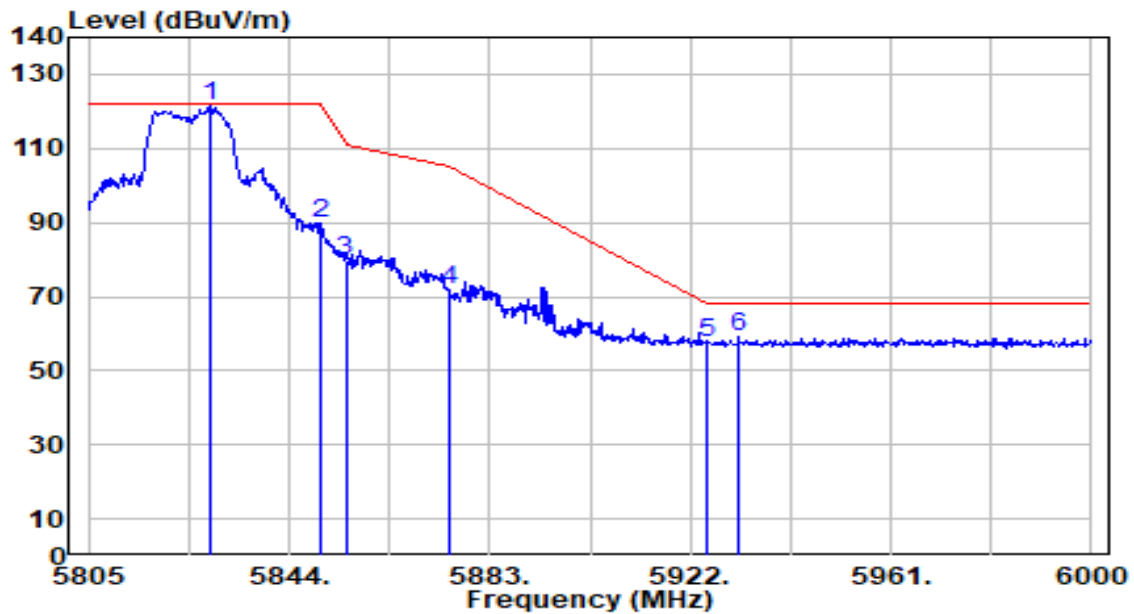


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.790	117.88	3.51	121.39	N/A	N/A	182	305	Peak
2	5850.000	86.46	3.51	89.96	-32.24	122.20	182	305	Peak
3	5855.000	76.25	3.51	79.76	-31.04	110.80	182	305	Peak
4	5875.000	68.59	3.50	72.09	-33.11	105.20	182	305	Peak
5	5925.000	53.83	3.51	57.34	-10.86	68.20	182	305	Peak
6	* 5931.360	55.85	3.51	59.37	-8.83	68.20	182	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

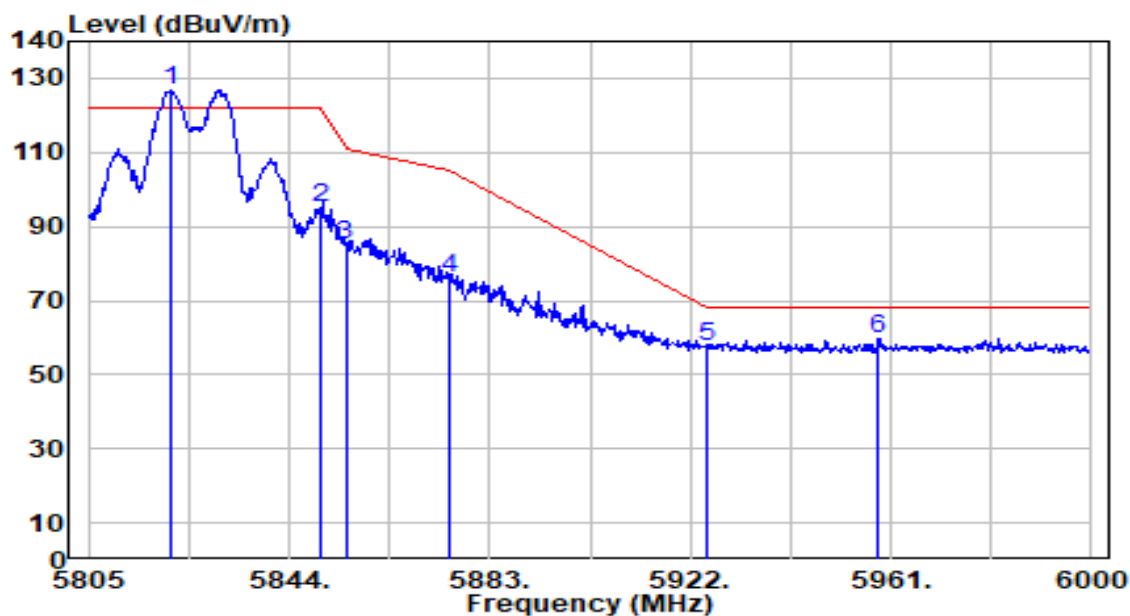


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.990	123.21	3.51	126.73	N/A	N/A	184	273	Peak
2	5850.000	91.68	3.51	95.19	-27.01	122.20	184	273	Peak
3	5855.000	81.68	3.51	85.19	-25.61	110.80	184	273	Peak
4	5875.000	72.70	3.50	76.21	-28.99	105.20	184	273	Peak
5	5925.000	53.85	3.51	57.36	-10.84	68.20	184	273	Peak
6	* 5958.660	56.33	3.52	59.85	-8.35	68.20	184	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

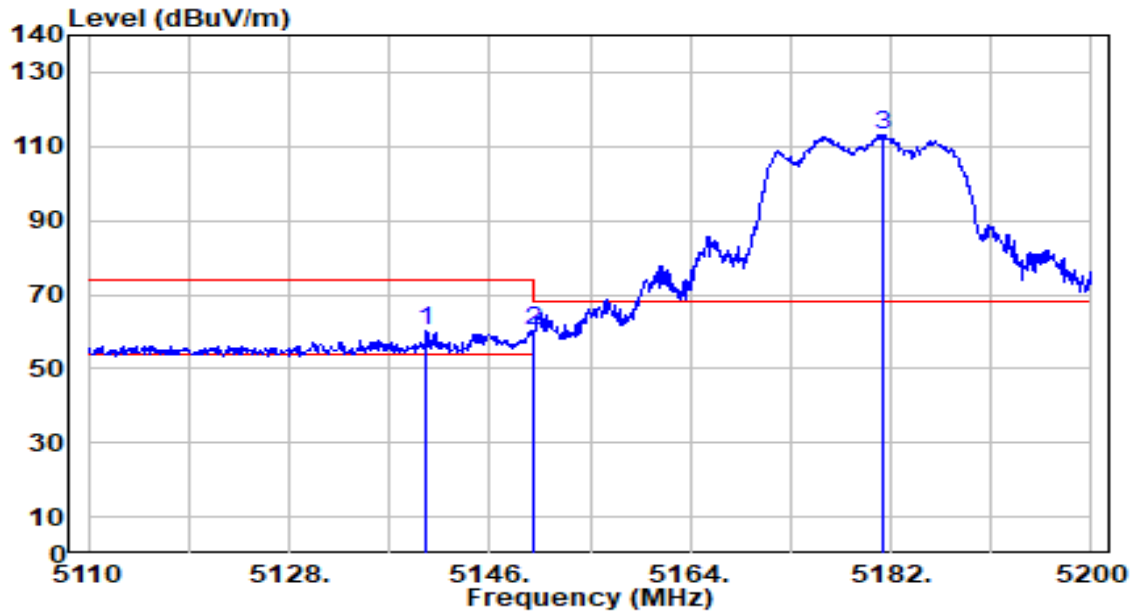


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.330	58.46	1.80	60.27	-13.73	74.00	143	343	Peak
2		5150.000	58.33	1.82	60.15	-13.85	74.00	143	343	Peak
3		5181.370	111.39	1.87	113.26	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

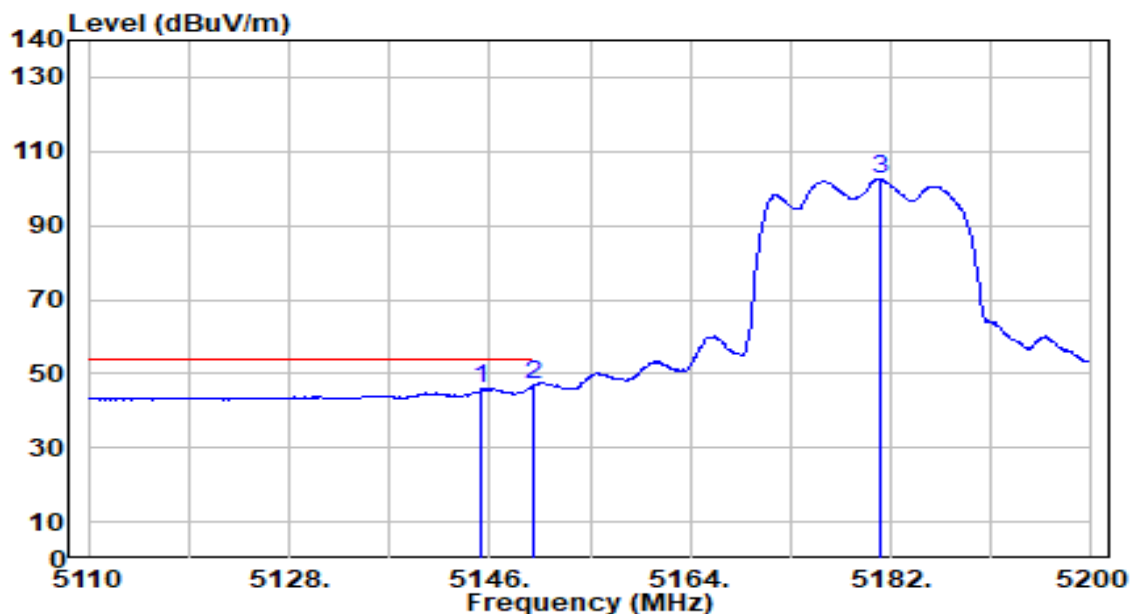


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5145.190	44.08	1.81	45.89	-8.11	54.00	143	343	Average
2	*	5150.000	45.01	1.82	46.83	-7.17	54.00	143	343	Average
3		5181.100	100.79	1.87	102.66	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

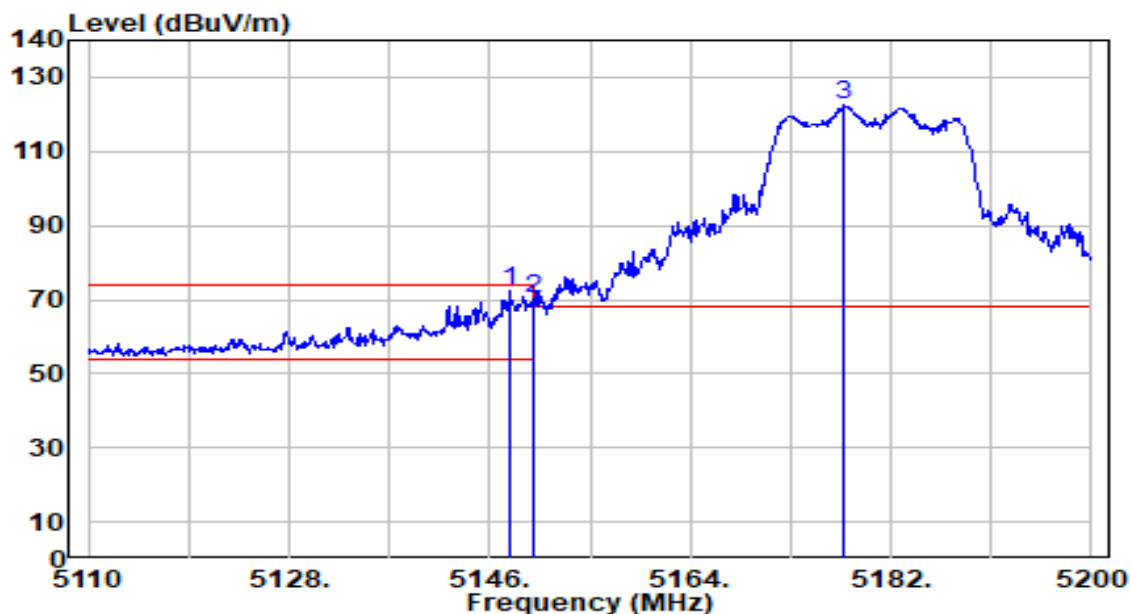


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	70.31	1.82	72.13	-1.87	74.00	195	159	Peak
2		5150.000	68.19	1.82	70.01	-3.99	74.00	195	159	Peak
3		5177.860	120.53	1.87	122.39	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

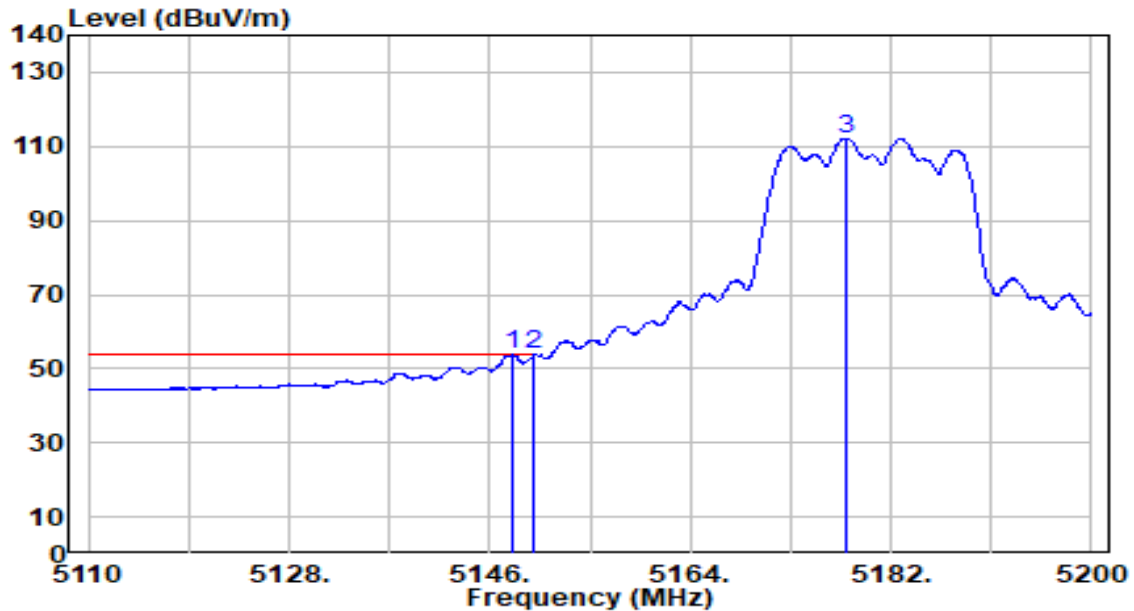


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.070	51.91	1.82	53.73	-0.27	54.00	195	159	Average
2	*	5150.000	51.92	1.82	53.74	-0.26	54.00	195	159	Average
3		5177.950	110.34	1.87	112.21	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

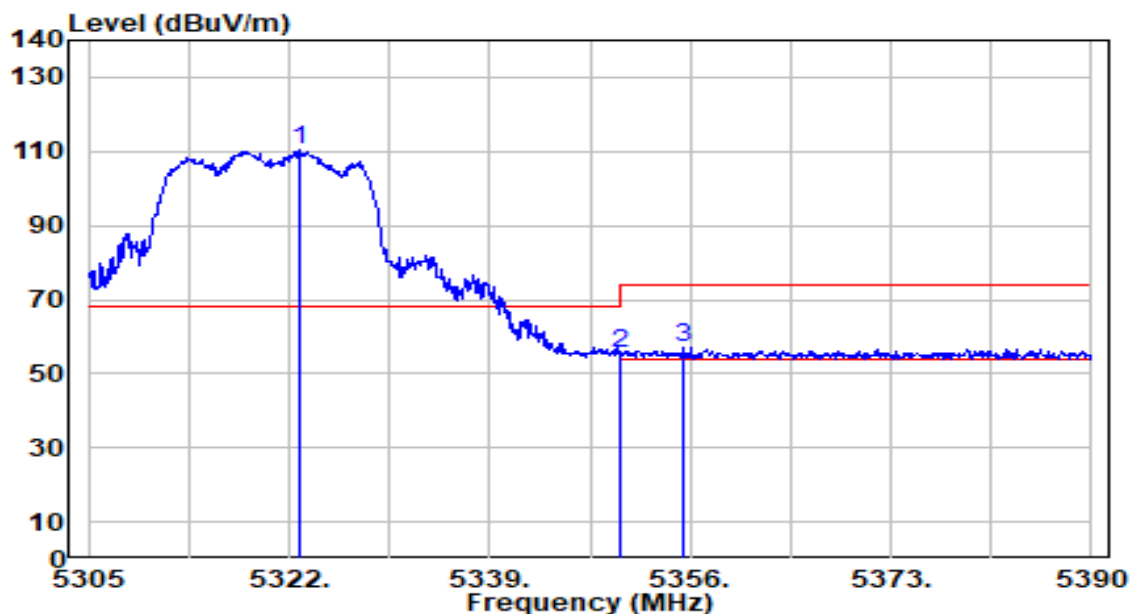


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.850	108.60	1.73	110.33	N/A	N/A	190	277	Peak
2	5350.000	53.77	1.69	55.46	-18.54	74.00	190	277	Peak
3	* 5355.405	55.40	1.68	57.08	-16.92	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

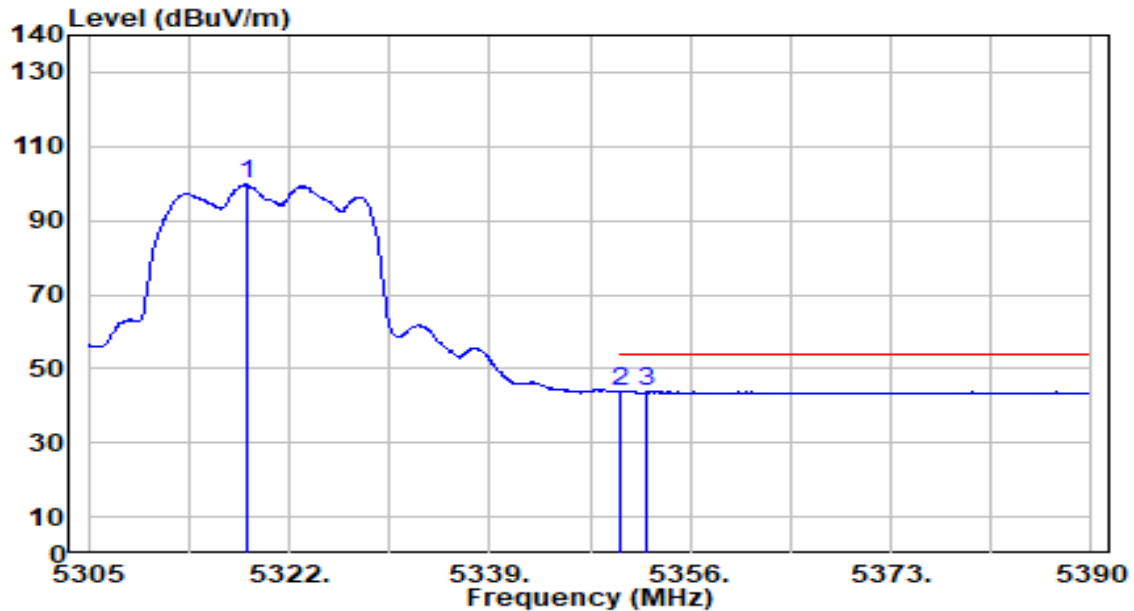


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.345	98.11	1.73	99.84	N/A	N/A	190	277	Average
2	5350.000	42.01	1.69	43.71	-10.29	54.00	190	277	Average
3	* 5352.345	42.28	1.69	43.97	-10.03	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

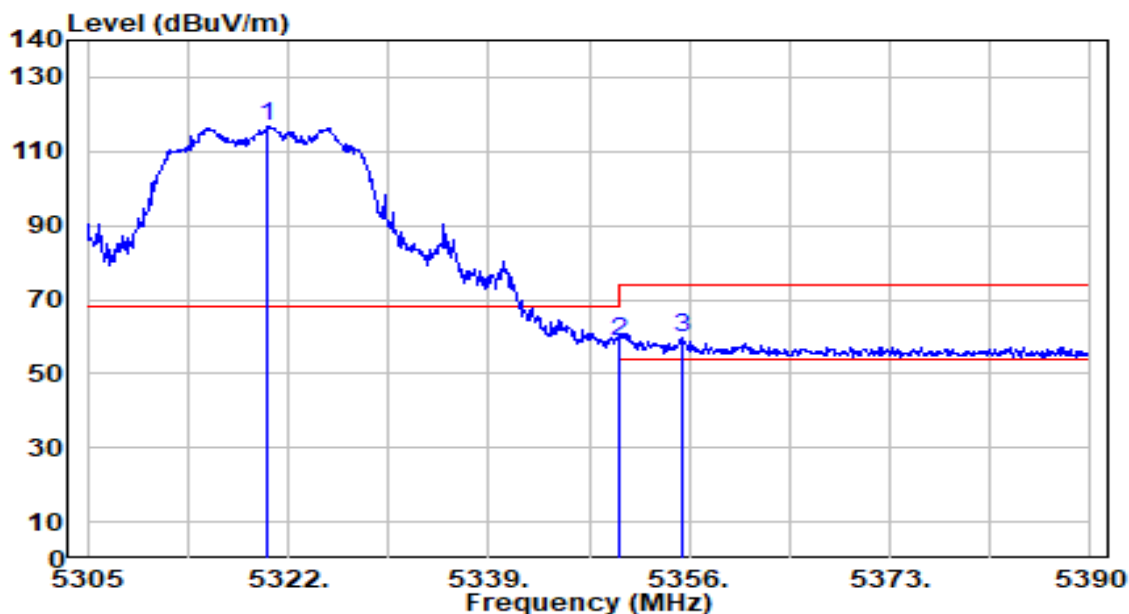


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.215	114.99	1.73	116.72	N/A	N/A	192	247	Peak
2	5350.000	56.97	1.69	58.66	-15.34	74.00	192	247	Peak
3	* 5355.490	58.11	1.68	59.80	-14.20	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

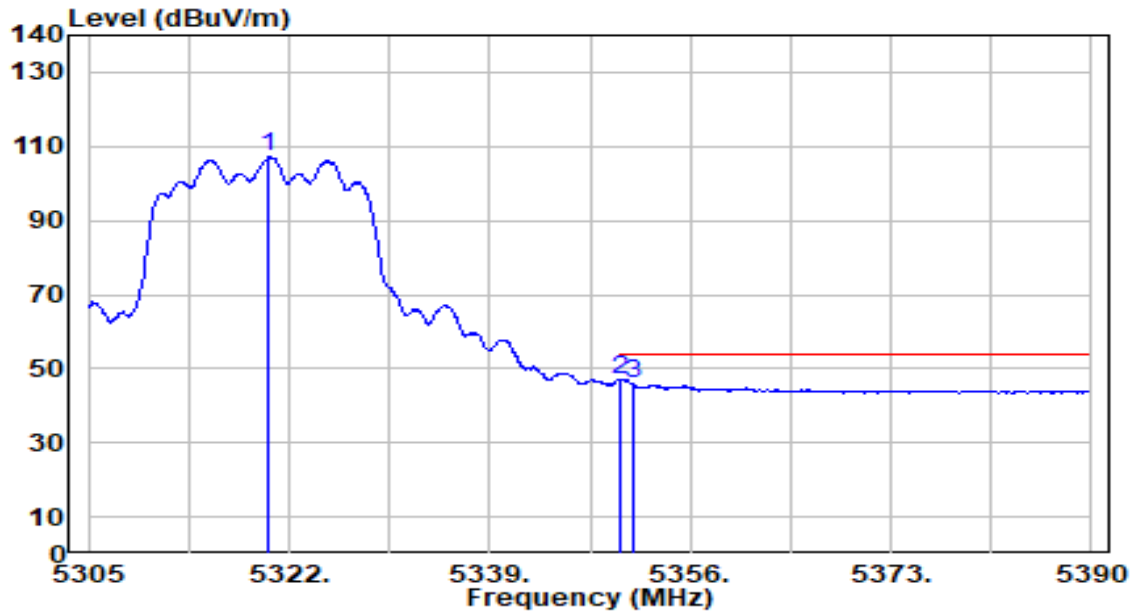


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5320.300	105.46	1.73	107.19	N/A	N/A	192	247	Average
2	*	5350.000	45.11	1.69	46.80	-7.20	54.00	192	247	Average
3		5351.155	44.21	1.69	45.90	-8.10	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

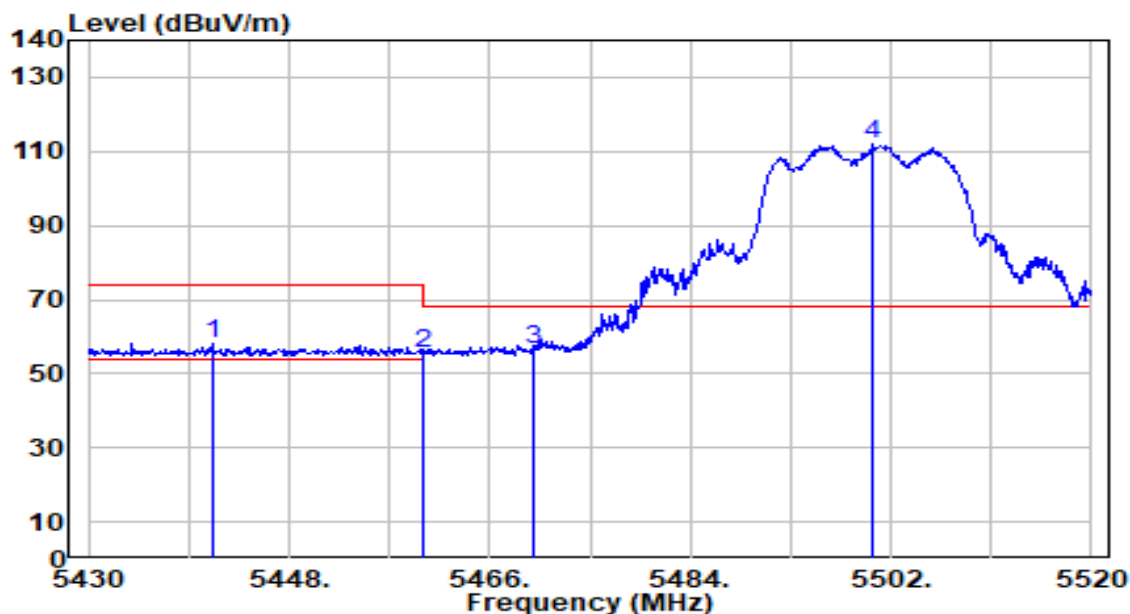


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.070	56.44	1.79	58.23	-15.77	74.00	213	305	Peak
2	5460.000	53.78	1.87	55.65	-18.35	74.00	213	305	Peak
3	* 5470.000	54.88	1.92	56.79	-11.41	68.20	213	305	Peak
4	5500.380	109.88	2.04	111.92	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

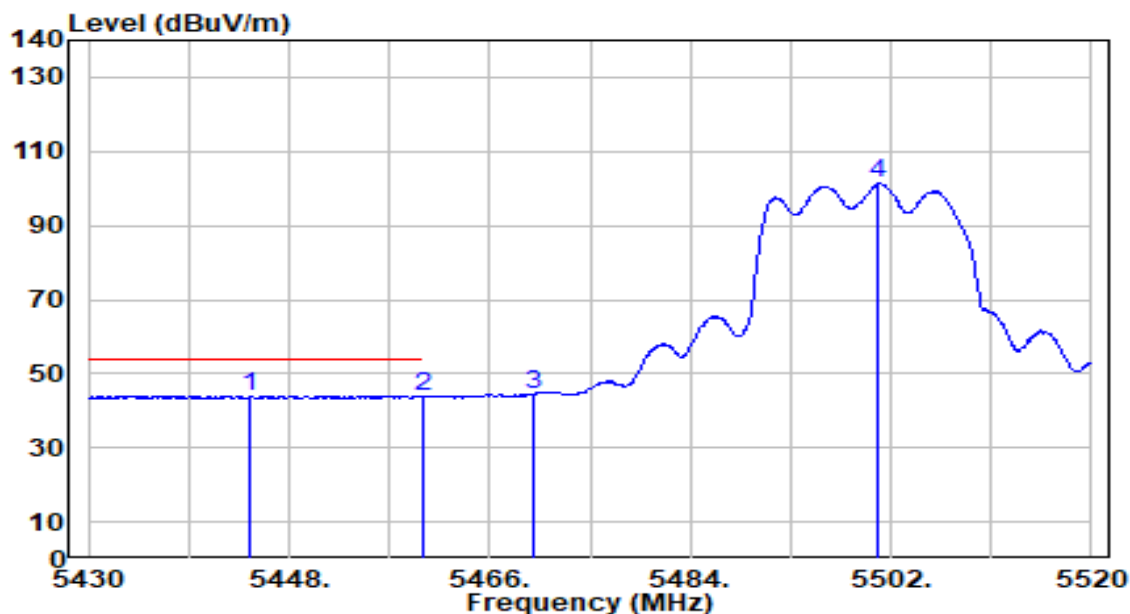


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5444.400	42.28	1.81	44.09	-9.91	54.00	213	305	Average
2		5460.000	41.82	1.87	43.70	-10.30	54.00	213	305	Average
3		5470.000	42.48	1.92	44.40	N/A	N/A	213	305	Average
4		5500.830	99.24	2.04	101.28	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

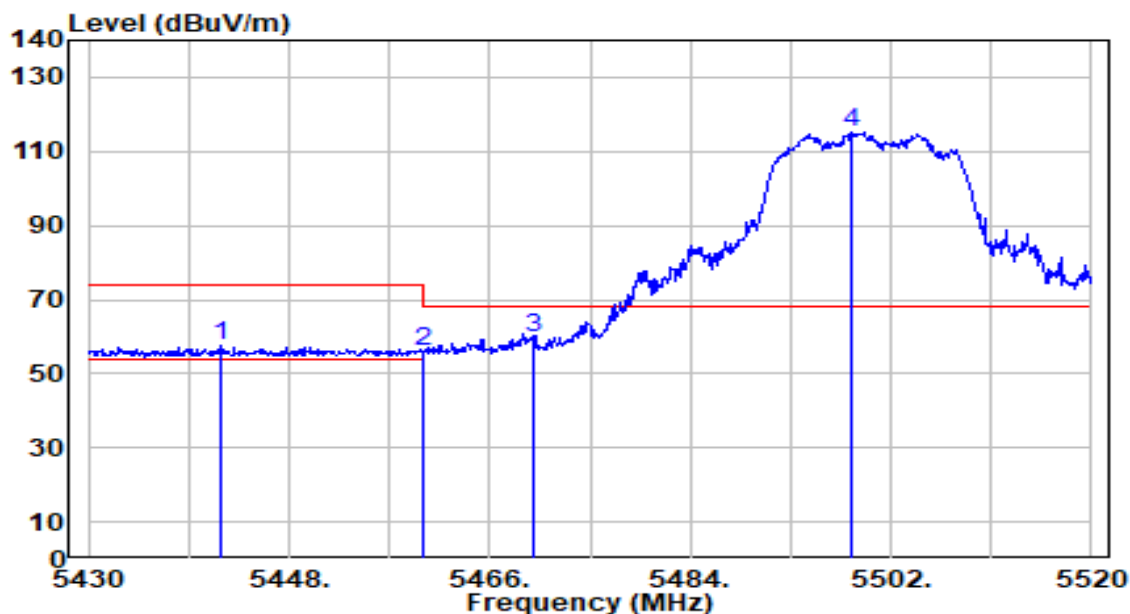


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5441.790	55.81	1.80	57.61	-16.39	74.00	270	277	Peak
2	5460.000	54.32	1.87	56.19	-17.81	74.00	270	277	Peak
3	* 5470.000	57.69	1.92	59.61	-8.59	68.20	270	277	Peak
4	5498.490	113.21	2.03	115.25	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

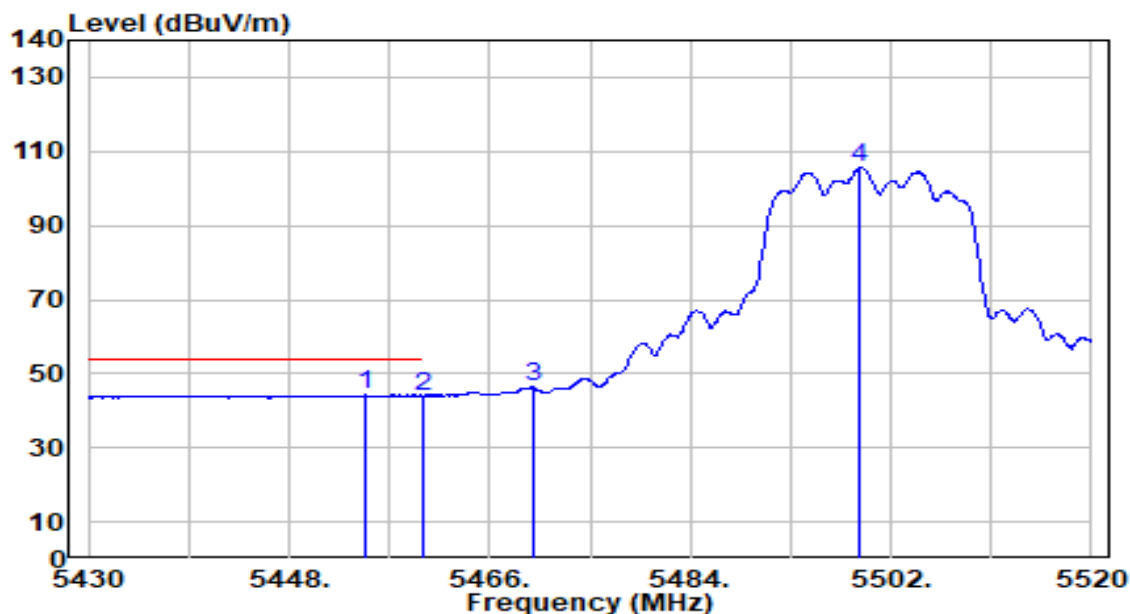


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.840	42.36	1.85	44.21	-9.79	54.00	270	277	Average
2		5460.000	42.22	1.87	44.10	-9.90	54.00	270	277	Average
3		5470.000	44.32	1.92	46.24	N/A	N/A	270	277	Average
4		5499.120	103.58	2.04	105.62	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

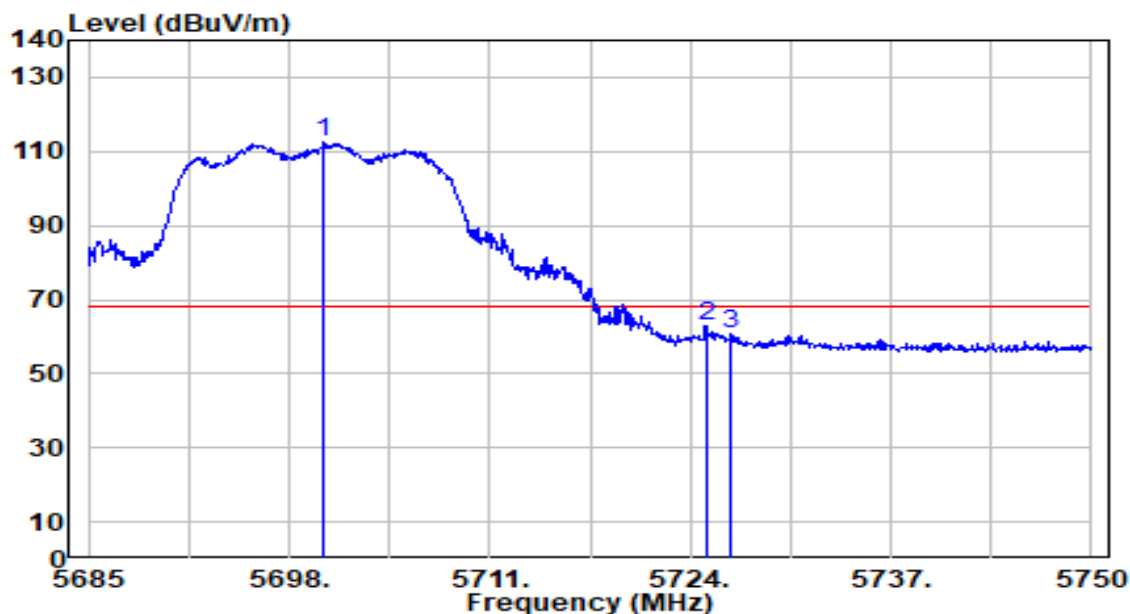


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5700.275	109.28	3.02	112.30	N/A	N/A	188	304	Peak
2	*	5725.000	59.57	3.14	62.71	-5.49	68.20	188	304	Peak
3		5726.665	57.37	3.15	60.52	-7.68	68.20	188	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

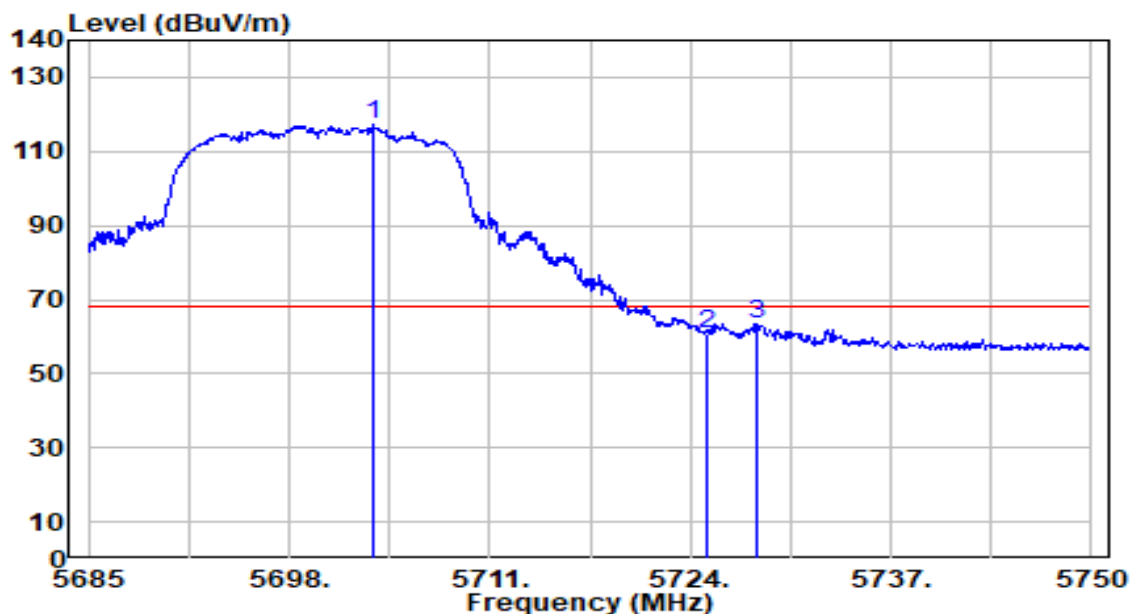


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.525	113.99	3.03	117.02	N/A	N/A	157	265	Peak
2	5725.000	57.63	3.14	60.77	-7.43	68.20	157	265	Peak
3	* 5728.290	60.14	3.16	63.29	-4.91	68.20	157	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

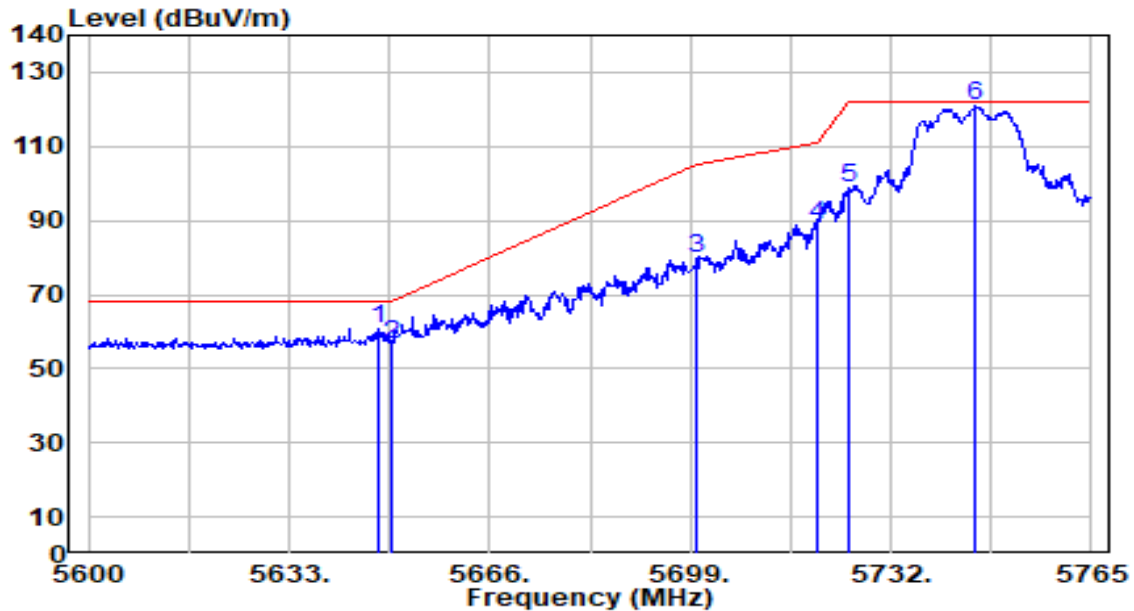


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.850	58.00	2.77	60.76	-7.44	68.20	194	304	Peak
2		5650.000	53.62	2.78	56.40	-11.80	68.20	194	304	Peak
3		5700.000	76.57	3.02	79.59	-25.61	105.20	194	304	Peak
4		5720.000	85.88	3.12	88.99	-21.81	110.80	194	304	Peak
5		5725.000	95.59	3.14	98.73	-23.47	122.20	194	304	Peak
6		5745.860	117.49	3.24	120.74	N/A	N/A	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

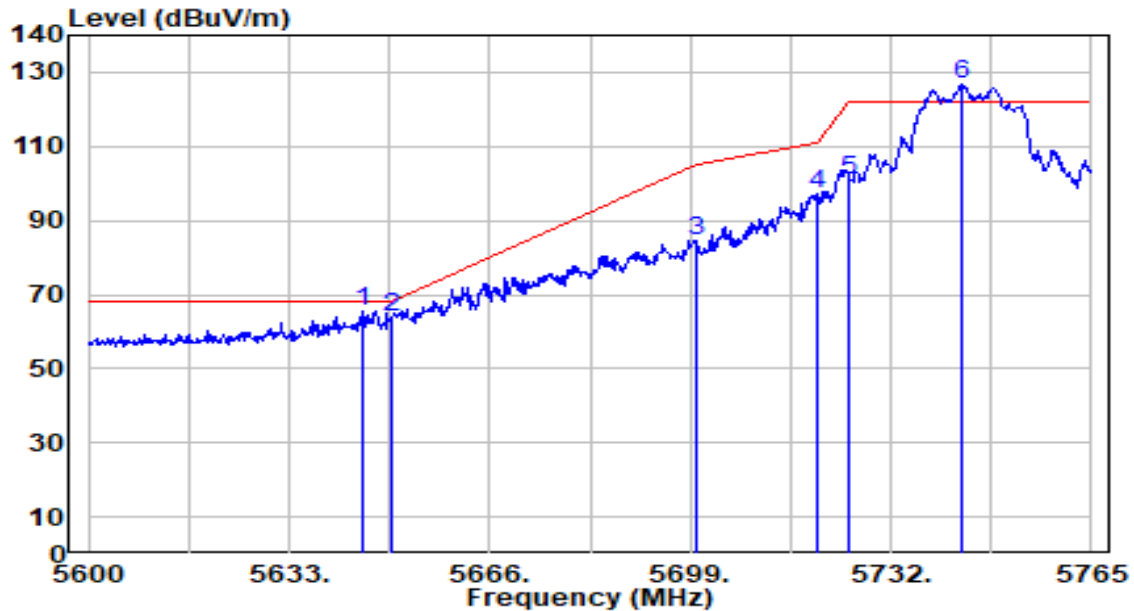


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.210	62.97	2.75	65.73	-2.47	68.20	167	270	Peak
2		5650.000	60.92	2.78	63.69	-4.51	68.20	167	270	Peak
3		5700.000	81.34	3.02	84.35	-20.85	105.20	167	270	Peak
4		5720.000	94.04	3.12	97.16	-13.64	110.80	167	270	Peak
5		5725.000	97.72	3.14	100.86	-21.34	122.20	167	270	Peak
6		5743.550	123.47	3.23	126.70	N/A	N/A	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

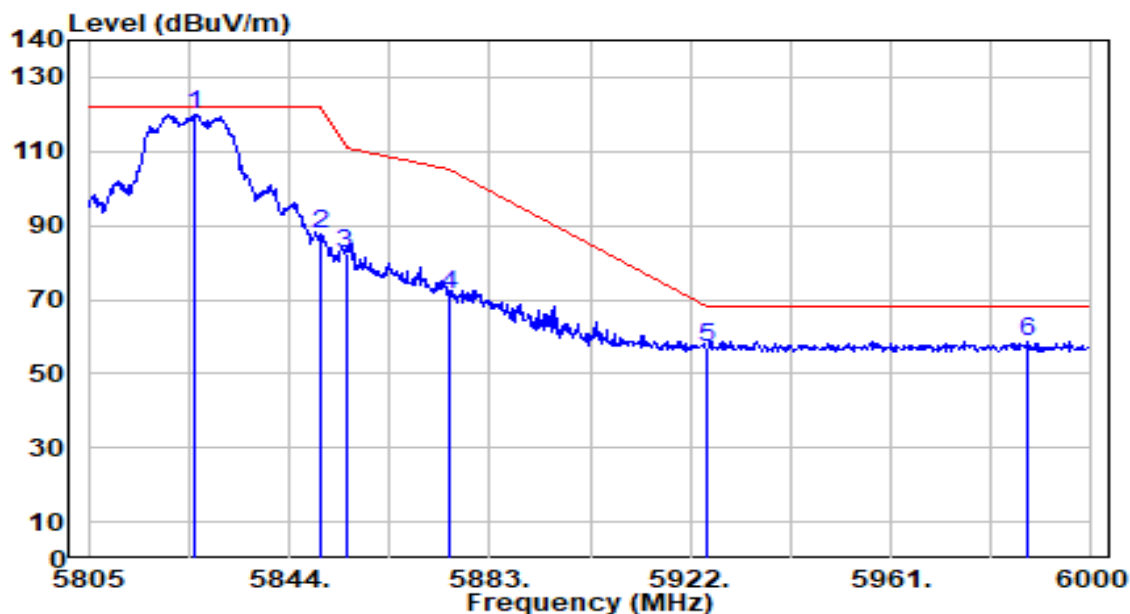


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5825.865	116.56	3.51	120.07	N/A	N/A	182	305	Peak
2	5850.000	84.07	3.51	87.58	-34.62	122.20	182	305	Peak
3	5855.000	78.99	3.51	82.50	-28.30	110.80	182	305	Peak
4	5875.000	67.59	3.50	71.10	-34.10	105.20	182	305	Peak
5	5925.000	53.44	3.51	56.95	-11.25	68.20	182	305	Peak
6	* 5987.715	55.32	3.54	58.85	-9.35	68.20	182	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

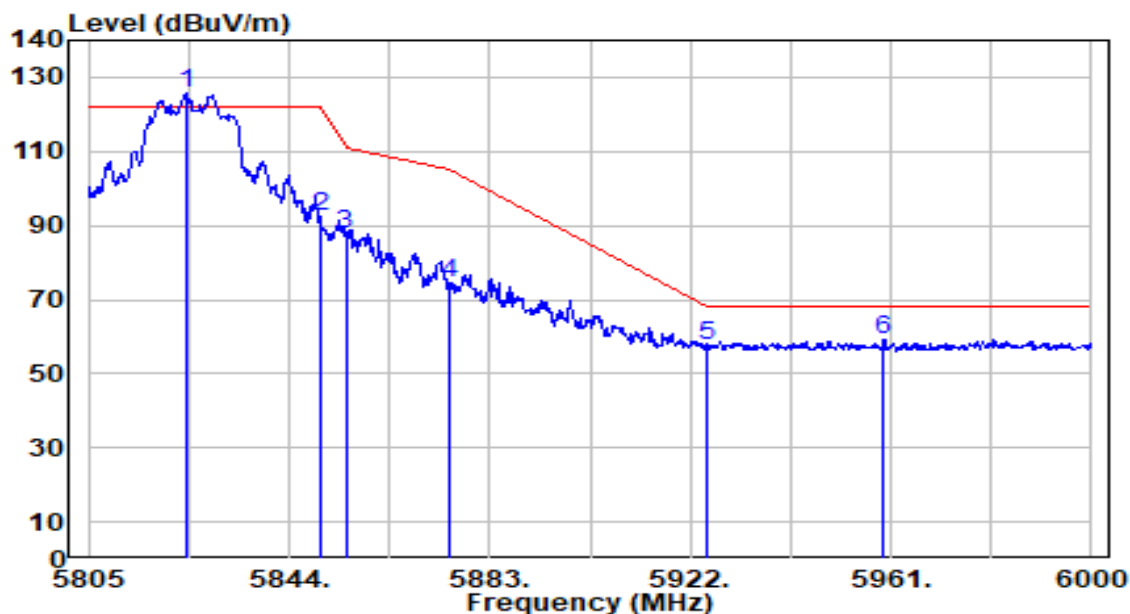


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.915	122.33	3.51	125.84	N/A	N/A	184	273	Peak
2	5850.000	89.00	3.51	92.51	-29.69	122.20	184	273	Peak
3	5855.000	84.31	3.51	87.82	-22.98	110.80	184	273	Peak
4	5875.000	71.16	3.50	74.67	-30.53	105.20	184	273	Peak
5	5925.000	54.02	3.51	57.54	-10.66	68.20	184	273	Peak
6	* 5959.635	55.61	3.52	59.13	-9.07	68.20	184	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

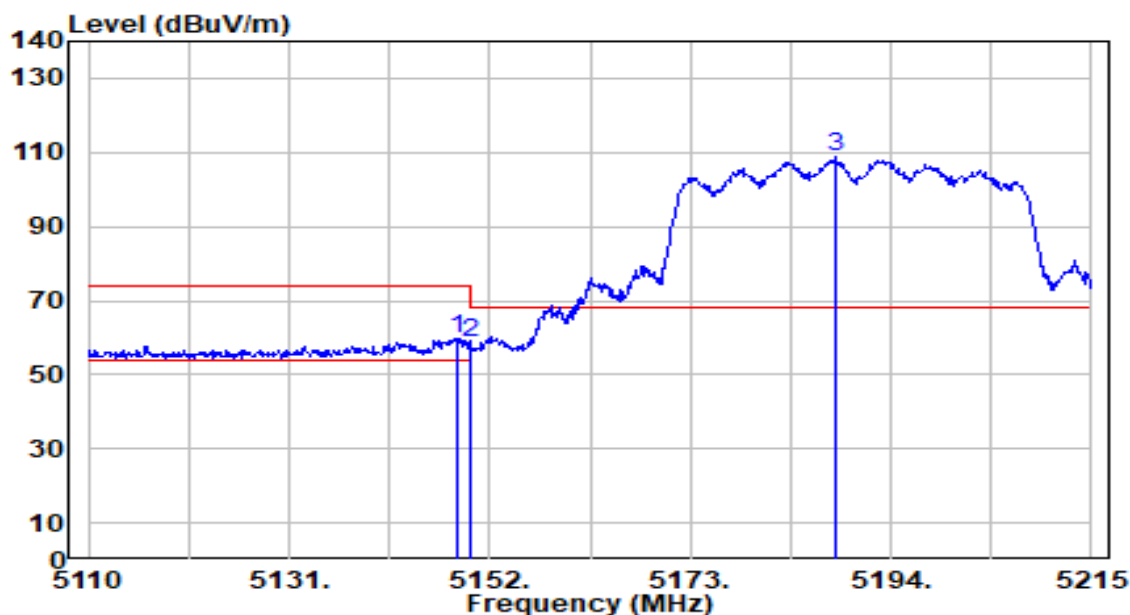


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.535	57.80	1.82	59.61	-14.39	74.00	143	343	Peak
2		5150.000	56.70	1.82	58.52	-15.48	74.00	143	343	Peak
3		5188.225	106.91	1.88	108.79	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

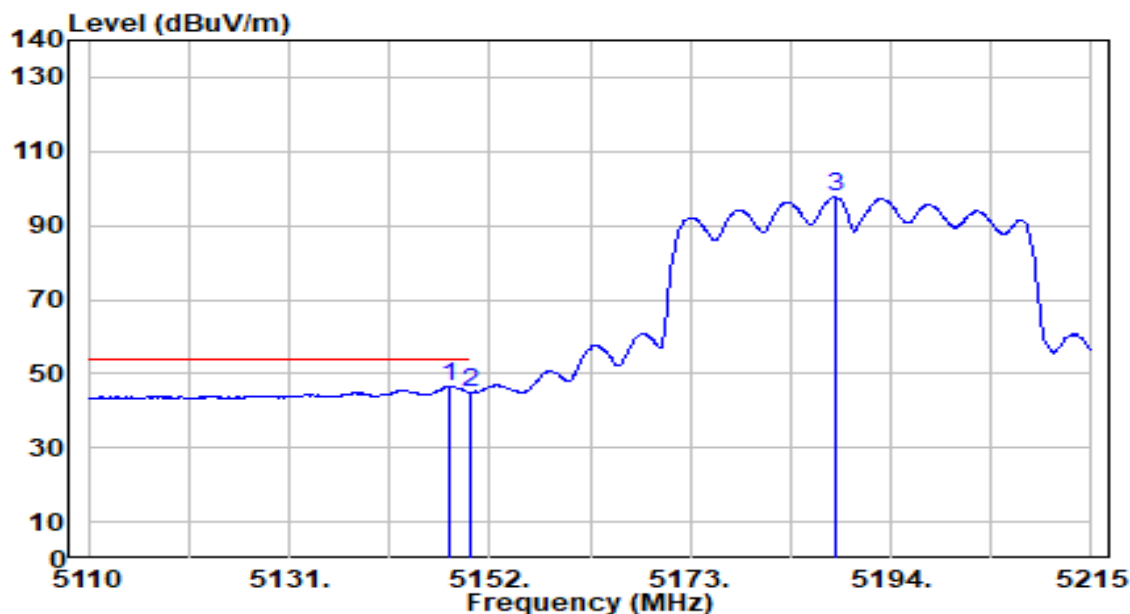


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	44.82	1.82	46.63	-7.37	54.00	143	343	Average
2		5150.000	43.08	1.82	44.90	-9.10	54.00	143	343	Average
3		5188.225	95.81	1.88	97.69	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

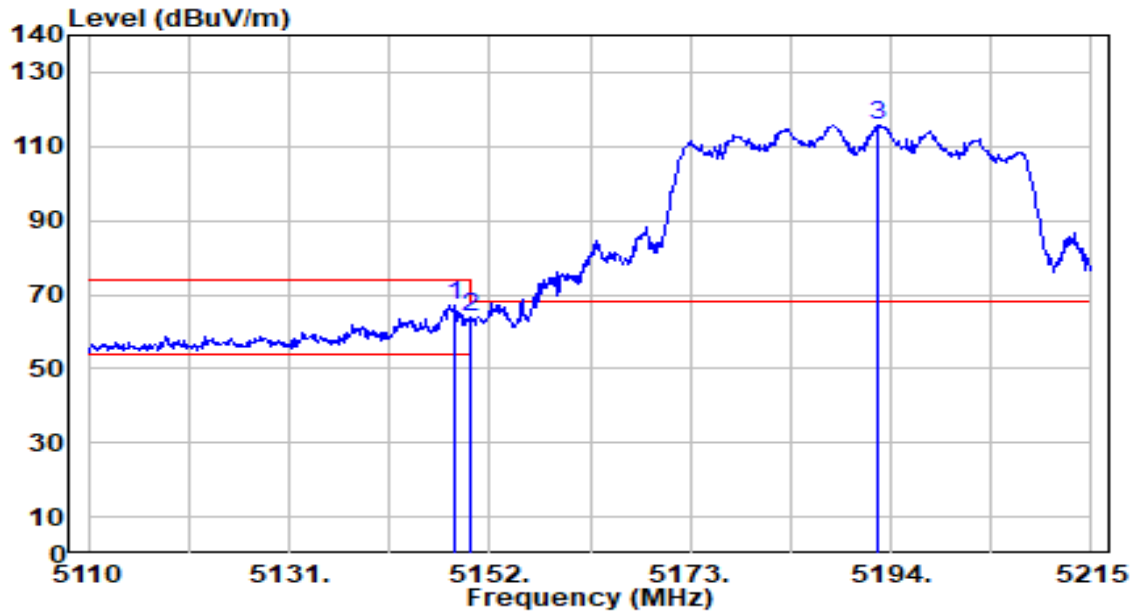


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.220	65.46	1.82	67.27	-6.73	74.00	195	159	Peak
2		5150.000	62.35	1.82	64.16	-9.84	74.00	195	159	Peak
3		5192.740	113.71	1.89	115.60	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

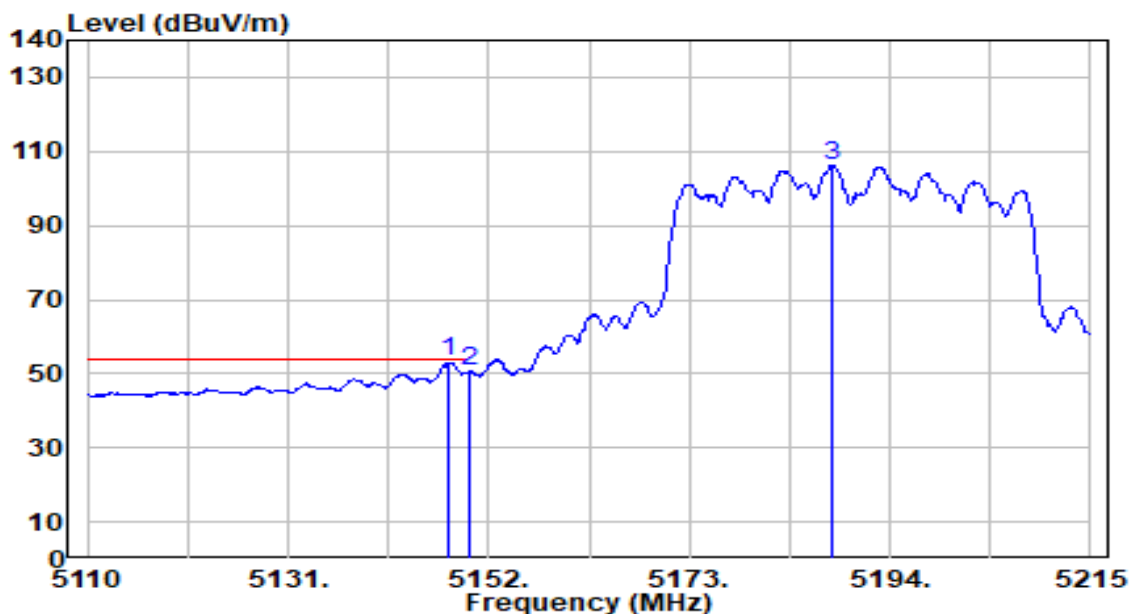


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	51.63	1.82	53.45	-0.55	54.00	195	159	Average
2		5150.000	48.87	1.82	50.69	-3.31	54.00	195	159	Average
3		5187.910	104.13	1.88	106.01	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

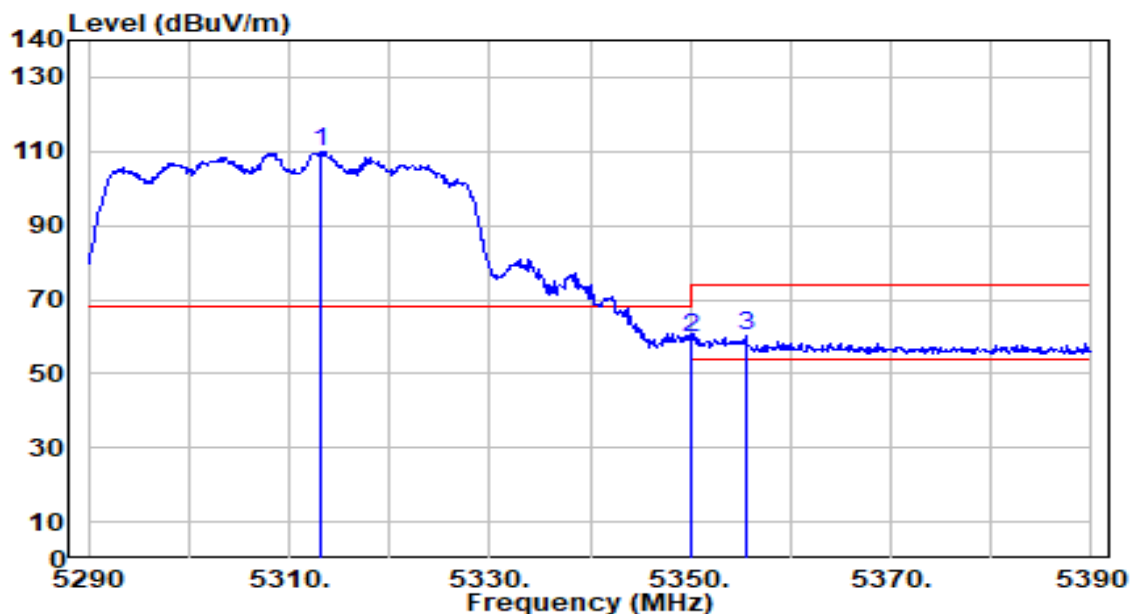


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.200	108.17	1.74	109.91	N/A	N/A	190	277	Peak
2	5350.000	57.93	1.69	59.62	-14.38	74.00	190	277	Peak
3	* 5355.600	58.73	1.68	60.41	-13.59	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

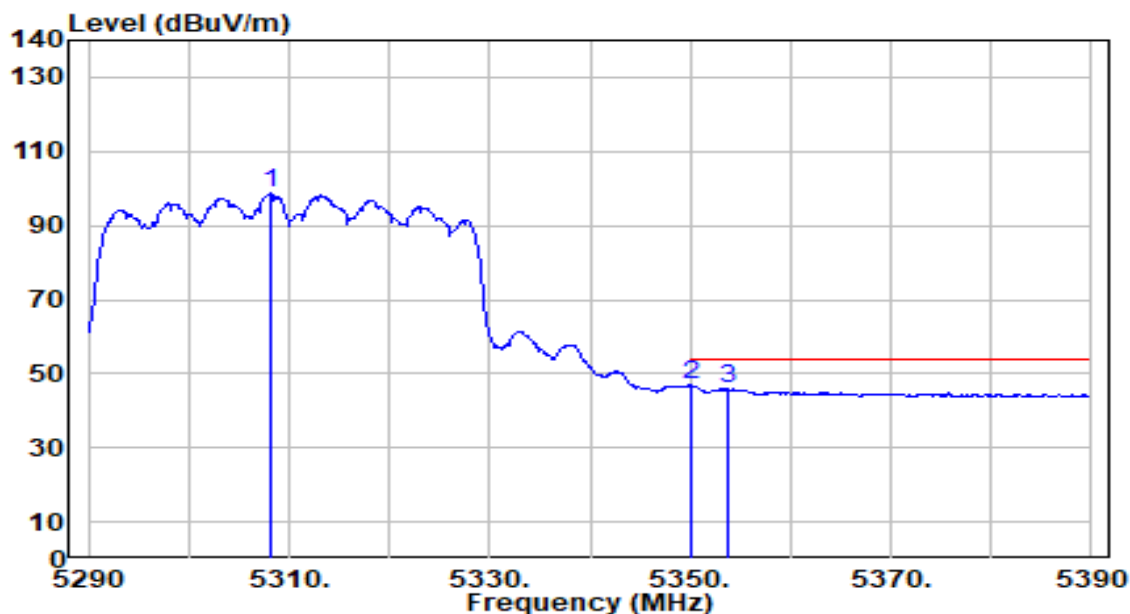


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5308.100	96.87	1.75	98.62	N/A	N/A	190	277	Average
2	*	5350.000	45.42	1.69	47.12	-6.88	54.00	190	277	Average
3		5353.800	44.09	1.69	45.77	-8.23	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

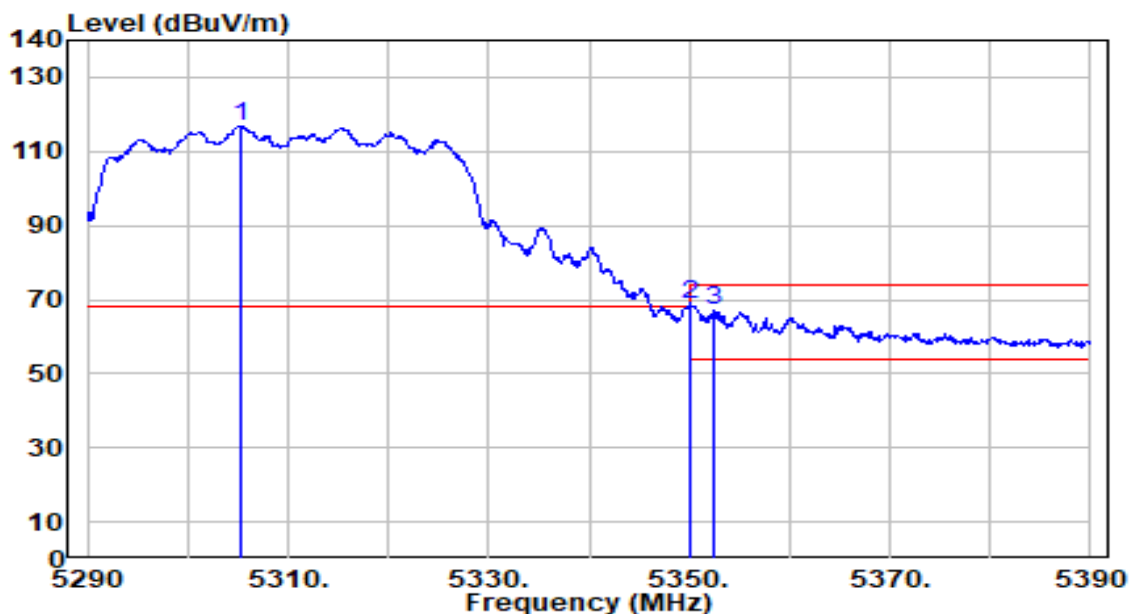


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5305.400	115.21	1.75	116.96	N/A	N/A	192	247	Peak
2	*	5350.000	66.93	1.69	68.62	-5.38	74.00	192	247	Peak
3		5352.400	65.39	1.69	67.08	-6.92	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

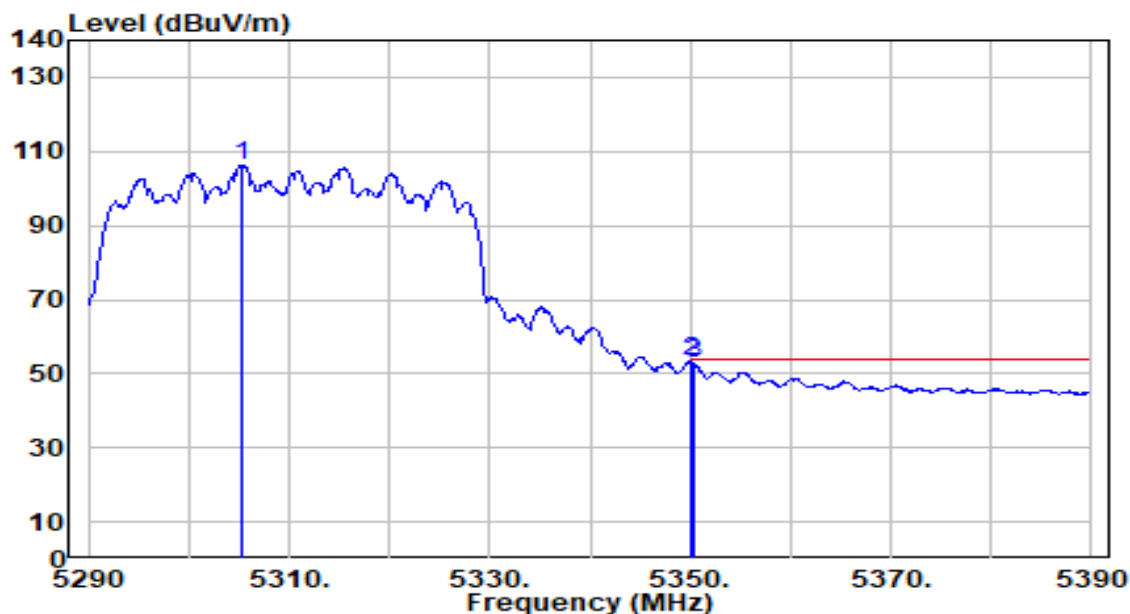


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5305.200	104.70	1.75	106.45	N/A	N/A	192	247	Average
2	*	5350.000	51.78	1.69	53.48	-0.52	54.00	192	247	Average
3		5350.400	51.14	1.69	52.83	-1.17	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

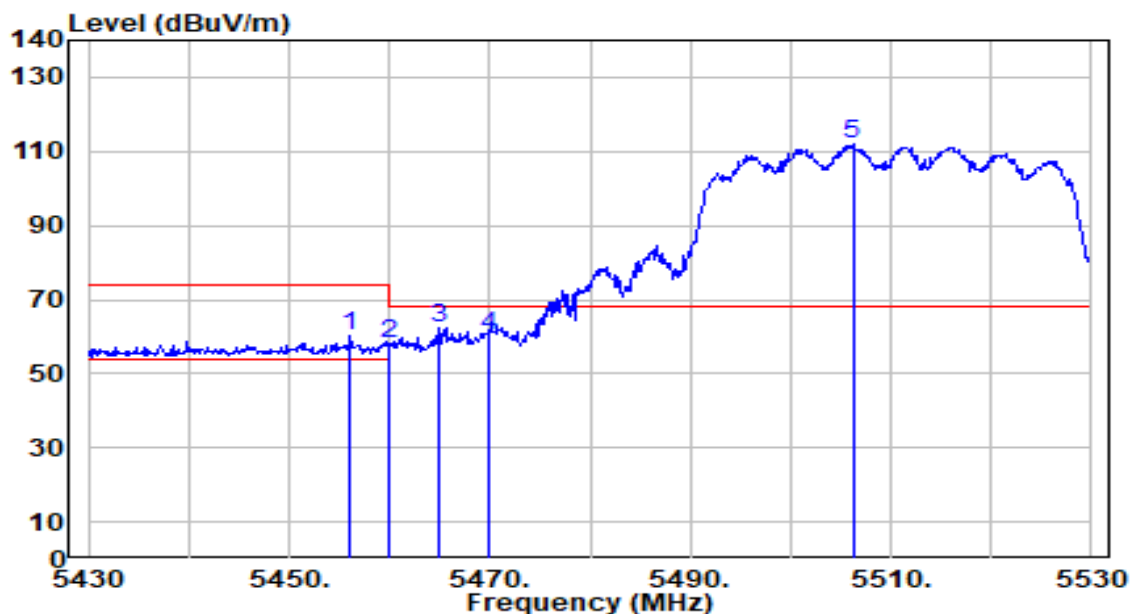


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.000	58.12	1.86	59.98	-14.02	74.00	213	305	Peak
2	5460.000	56.11	1.87	57.99	-16.01	74.00	213	305	Peak
3	* 5464.900	60.68	1.89	62.58	-5.62	68.20	213	305	Peak
4	5470.000	58.14	1.92	60.06	-8.14	68.20	213	305	Peak
5	5506.200	110.00	2.07	112.07	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

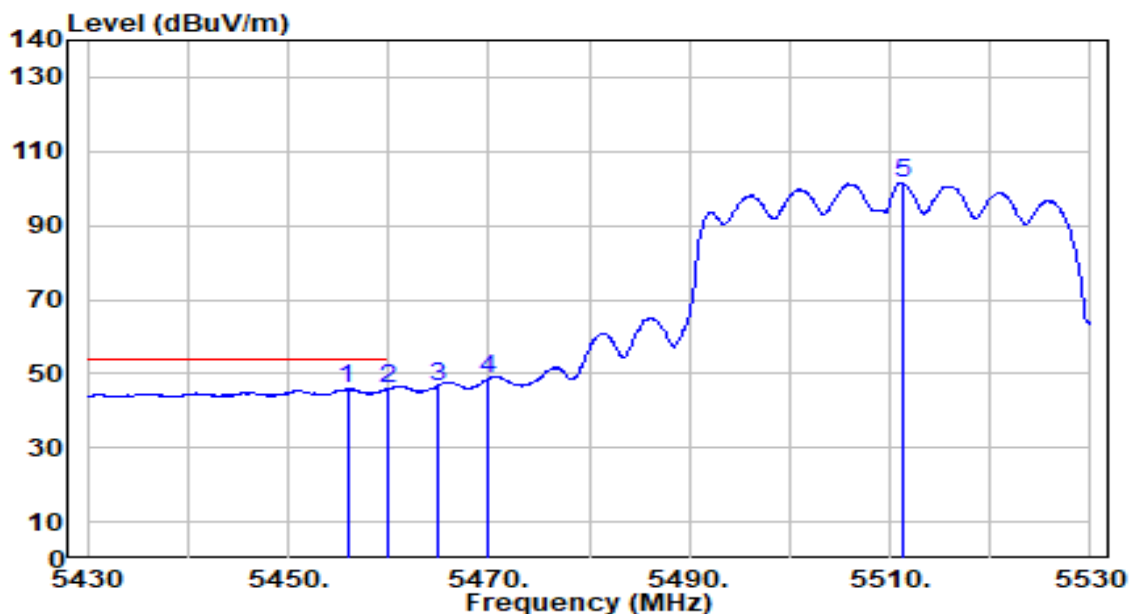


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.900	44.07	1.86	45.93	-8.07	54.00	213	305	Average
2		5460.000	43.99	1.87	45.86	-8.14	54.00	213	305	Average
3		5464.900	44.77	1.89	46.66	N/A	N/A	213	305	Average
4		5470.000	46.63	1.92	48.54	N/A	N/A	213	305	Average
5		5511.200	99.47	2.10	101.57	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

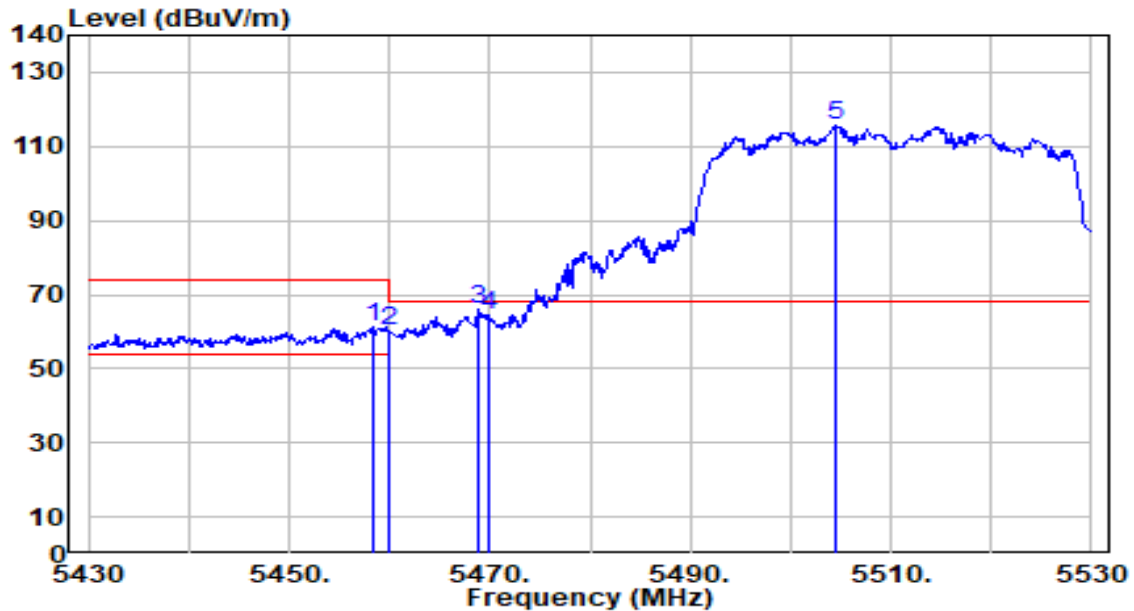


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.300	59.32	1.87	61.18	-12.82	74.00	270	277	Peak
2	5460.000	58.44	1.87	60.31	-13.69	74.00	270	277	Peak
3	* 5468.900	64.12	1.91	66.03	-2.17	68.20	270	277	Peak
4	5470.000	62.30	1.92	64.21	-3.99	68.20	270	277	Peak
5	5504.400	113.54	2.06	115.60	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

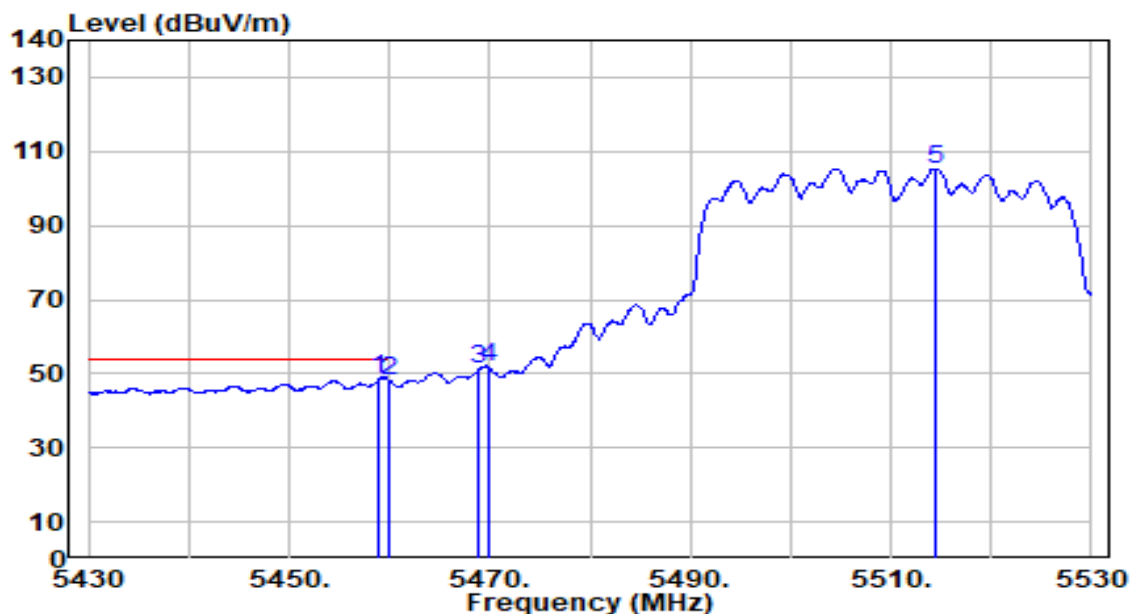


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.000	46.61	1.87	48.48	-5.52	54.00	270	277	Average
2		5460.000	46.37	1.87	48.24	-5.76	54.00	270	277	Average
3		5468.900	49.16	1.91	51.07	N/A	N/A	270	277	Average
4		5470.000	49.63	1.92	51.55	N/A	N/A	270	277	Average
5		5514.500	103.28	2.11	105.39	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

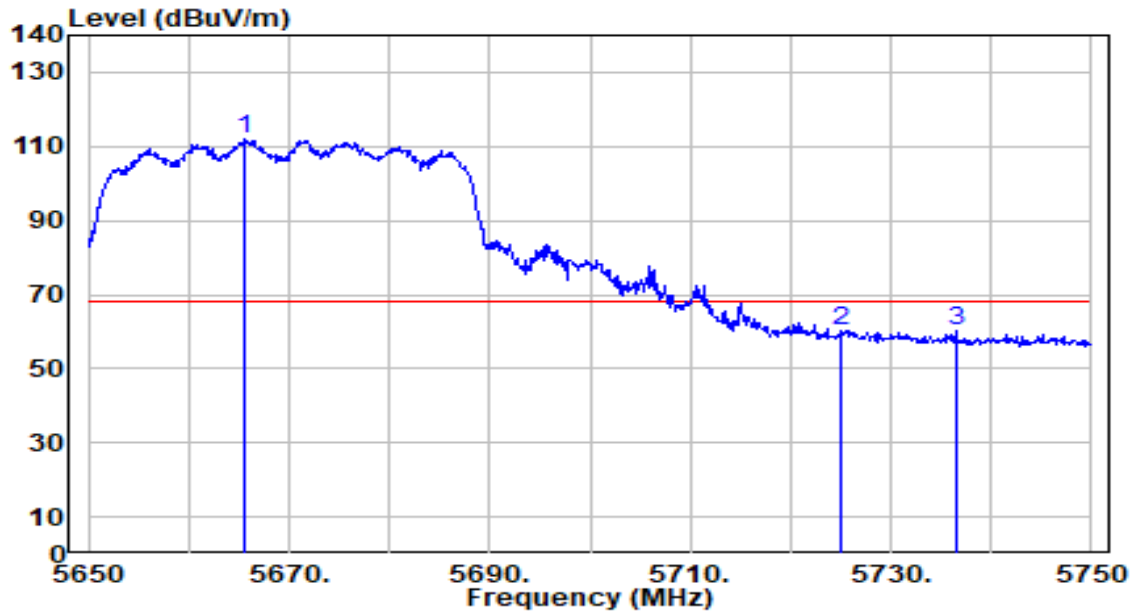


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5665.600	108.91	2.85	111.76	N/A	N/A	188	304	Peak
2	*	5725.000	57.15	3.14	60.29	-7.91	68.20	188	304	Peak
3		5736.500	56.90	3.20	60.10	-8.10	68.20	188	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

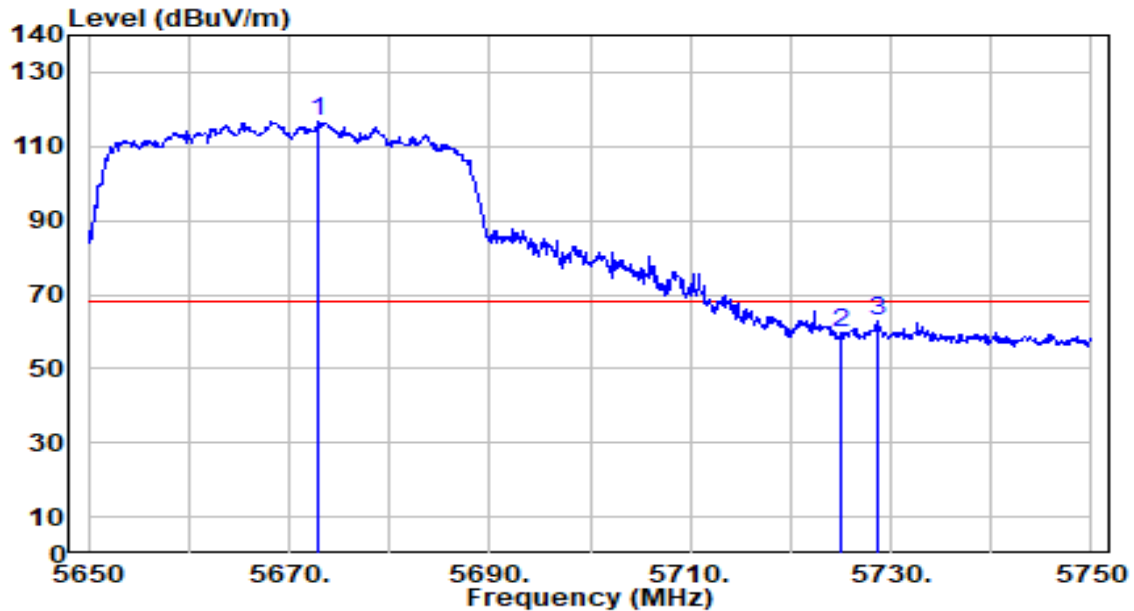


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5673.000	114.12	2.89	117.01	N/A	N/A	157	265	Peak
2	5725.000	56.33	3.14	59.47	-8.73	68.20	157	265	Peak
3	* 5728.700	59.91	3.16	63.07	-5.13	68.20	157	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

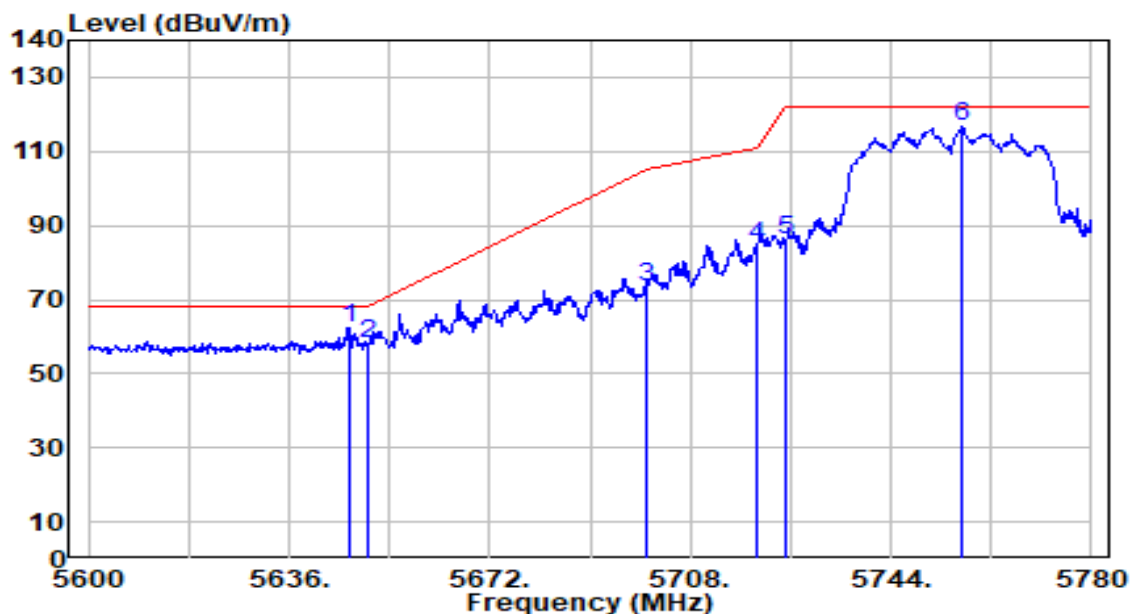


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	59.64	2.76	62.40	-5.80	68.20	194	304	Peak
2		5650.000	55.40	2.78	58.18	-10.02	68.20	194	304	Peak
3		5700.000	70.36	3.02	73.37	-31.83	105.20	194	304	Peak
4		5720.000	81.49	3.12	84.61	-26.19	110.80	194	304	Peak
5		5725.000	83.06	3.14	86.20	-36.00	122.20	194	304	Peak
6		5756.600	113.34	3.30	116.63	N/A	N/A	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

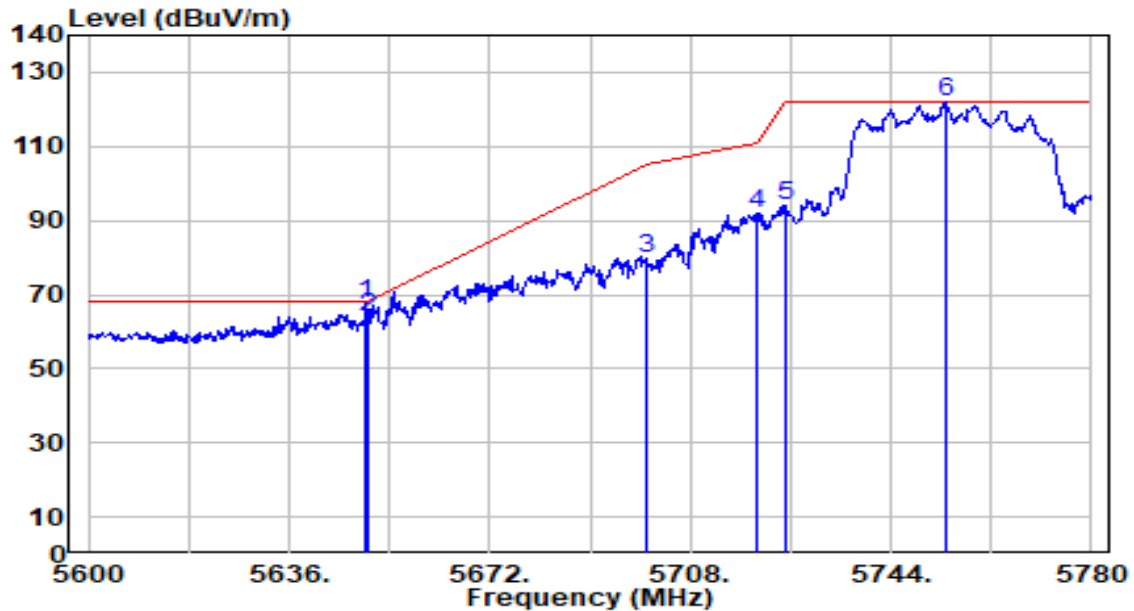


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5649.860	64.90	2.78	67.68	-0.52	68.20	167	270	Peak
2		5650.000	60.93	2.78	63.71	-4.49	68.20	167	270	Peak
3		5700.000	76.81	3.02	79.83	-25.37	105.20	167	270	Peak
4		5720.000	88.67	3.12	91.78	-19.02	110.80	167	270	Peak
5		5725.000	90.93	3.14	94.07	-28.13	122.20	167	270	Peak
6		5753.720	118.51	3.28	121.79	N/A	N/A	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

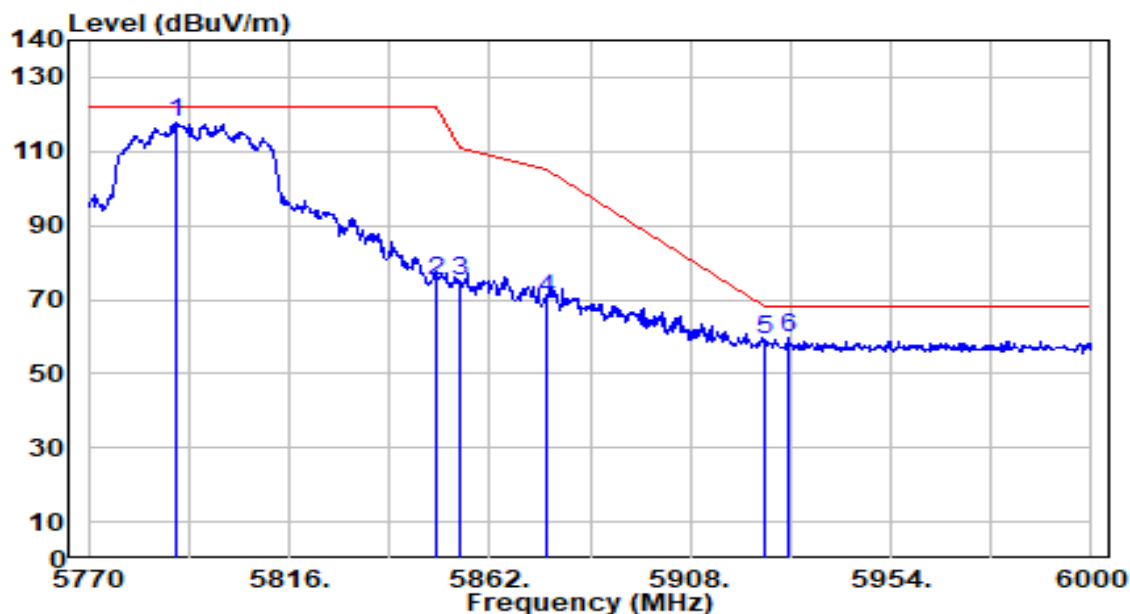


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.240	114.28	3.47	117.75	N/A	N/A	182	305	Peak
2	5850.000	71.48	3.51	74.98	-47.22	122.20	182	305	Peak
3	5855.000	71.73	3.51	75.24	-35.56	110.80	182	305	Peak
4	5875.000	66.99	3.50	70.50	-34.70	105.20	182	305	Peak
5	5925.000	55.57	3.51	59.08	-9.12	68.20	182	305	Peak
6	* 5930.310	56.10	3.51	59.61	-8.59	68.20	182	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

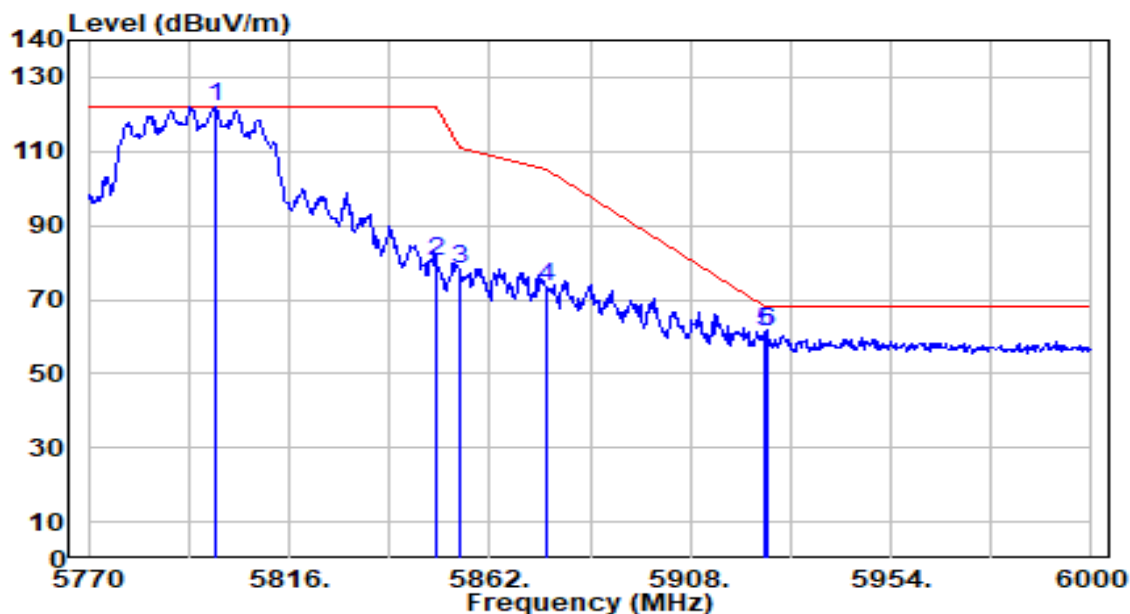


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5799.440	118.76	3.51	122.27	N/A	N/A	184	273	Peak
2	5850.000	76.84	3.51	80.35	-41.85	122.20	184	273	Peak
3	5855.000	74.51	3.51	78.02	-32.78	110.80	184	273	Peak
4	5875.000	69.78	3.50	73.29	-31.91	105.20	184	273	Peak
5	* 5925.000	57.81	3.51	61.32	-6.88	68.20	184	273	Peak
6	5925.940	57.76	3.51	61.28	-6.92	68.20	184	273	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

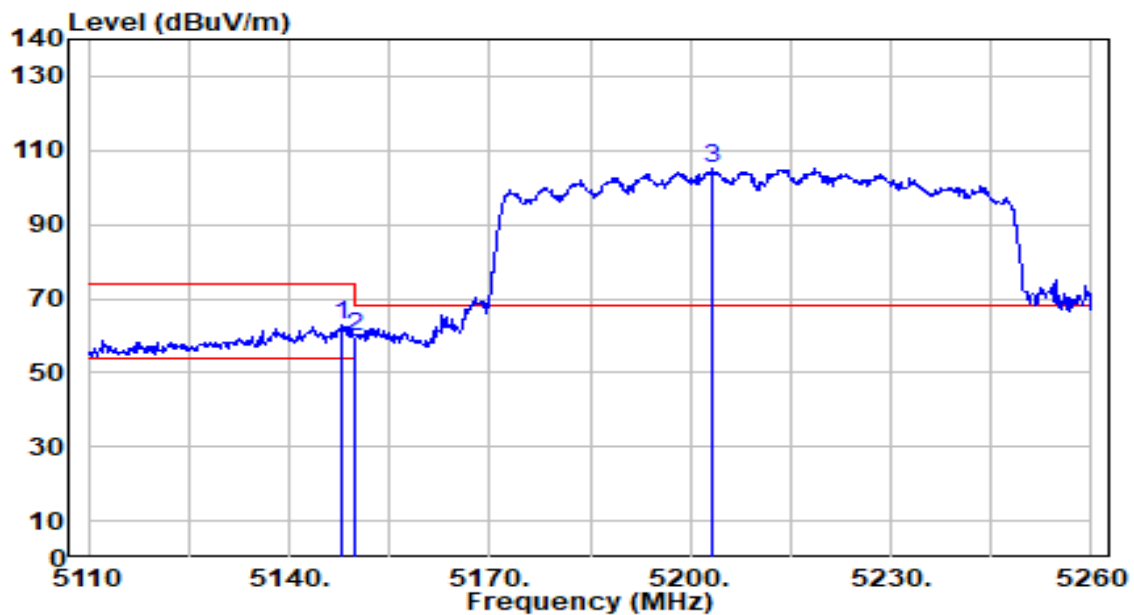


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	60.95	1.82	62.77	-11.23	74.00	143	343	Peak
2		5150.000	58.06	1.82	59.88	-14.12	74.00	143	343	Peak
3		5203.150	103.05	1.90	104.95	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

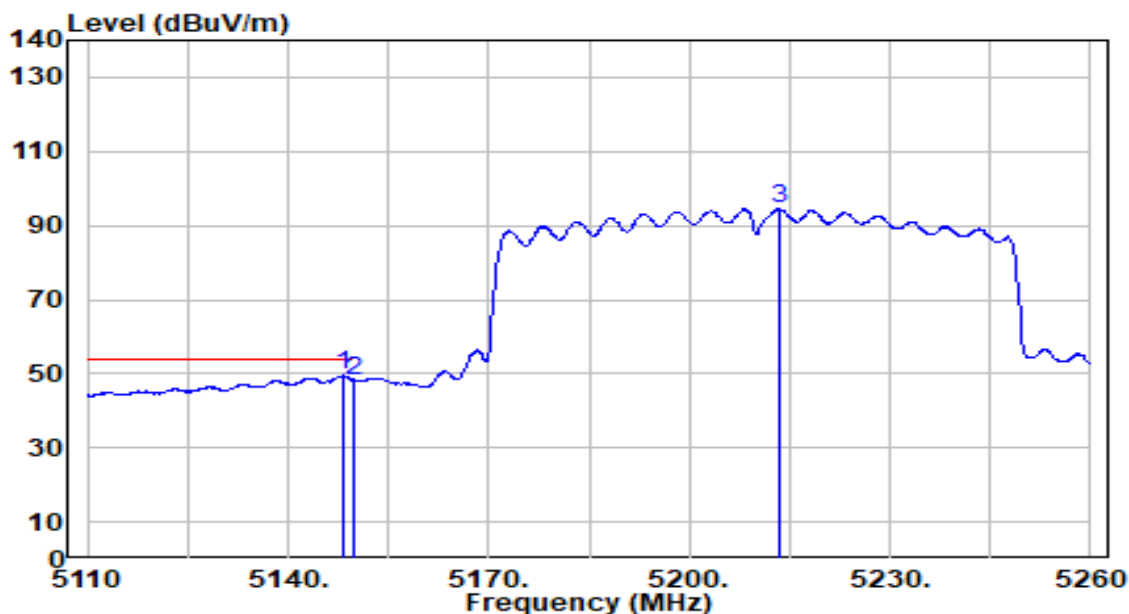


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.100	47.62	1.82	49.43	-4.57	54.00	143	343	Average
2		5150.000	46.27	1.82	48.09	-5.91	54.00	143	343	Average
3		5213.350	92.56	1.88	94.44	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

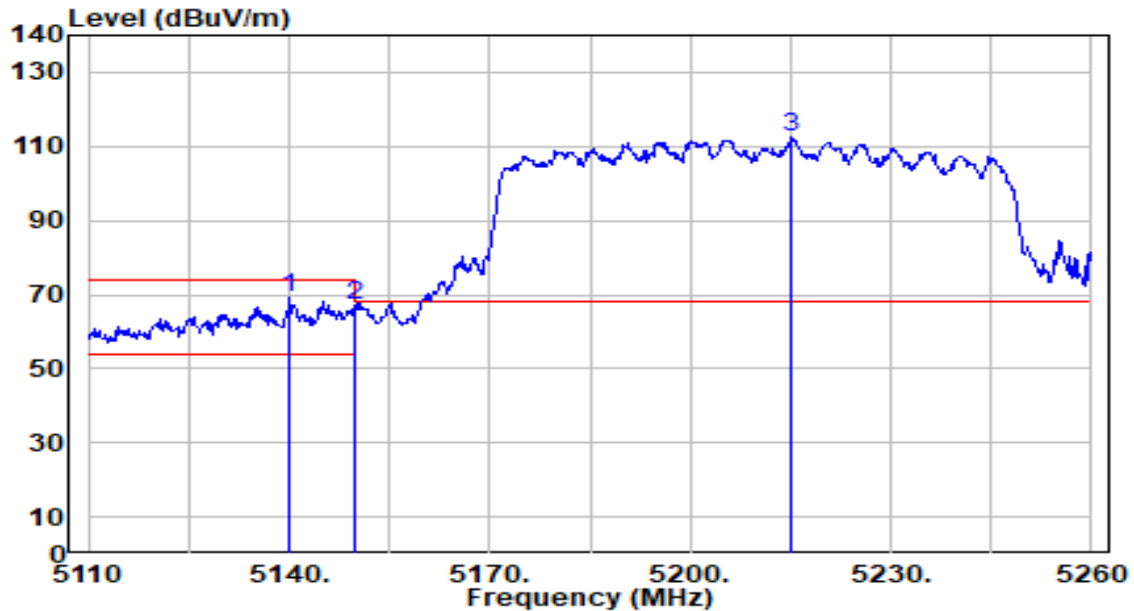


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5140.150	67.31	1.80	69.11	-4.89	74.00	195	159	Peak
2		5150.000	65.16	1.82	66.98	-7.02	74.00	195	159	Peak
3		5215.150	110.51	1.88	112.39	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

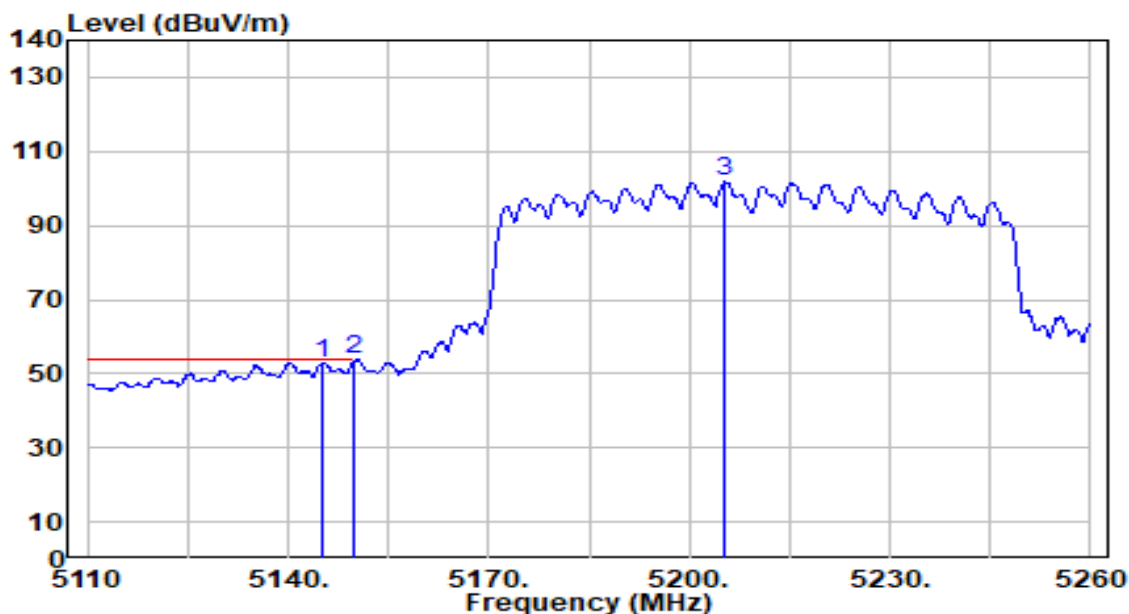


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5145.250	51.19	1.81	53.00	-1.00	54.00	195	159	Average
2	*	5150.000	51.91	1.82	53.73	-0.27	54.00	195	159	Average
3		5205.400	99.85	1.89	101.75	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

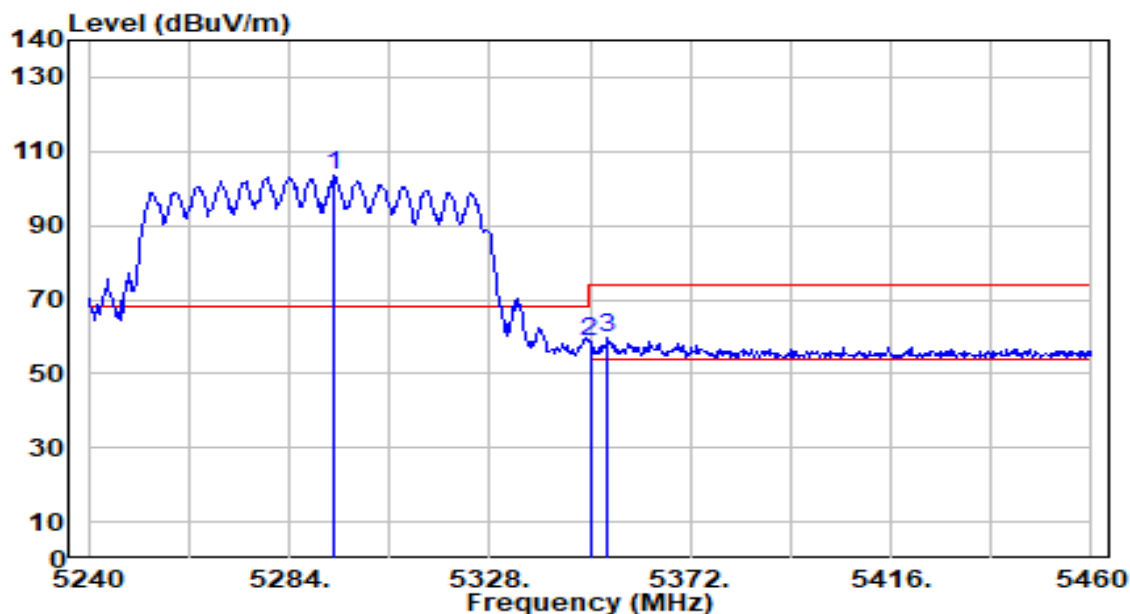


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.900	101.69	1.77	103.45	N/A	N/A	190	277	Peak
2	5350.000	57.19	1.69	58.88	-15.12	74.00	190	277	Peak
3	* 5353.960	57.87	1.69	59.56	-14.44	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

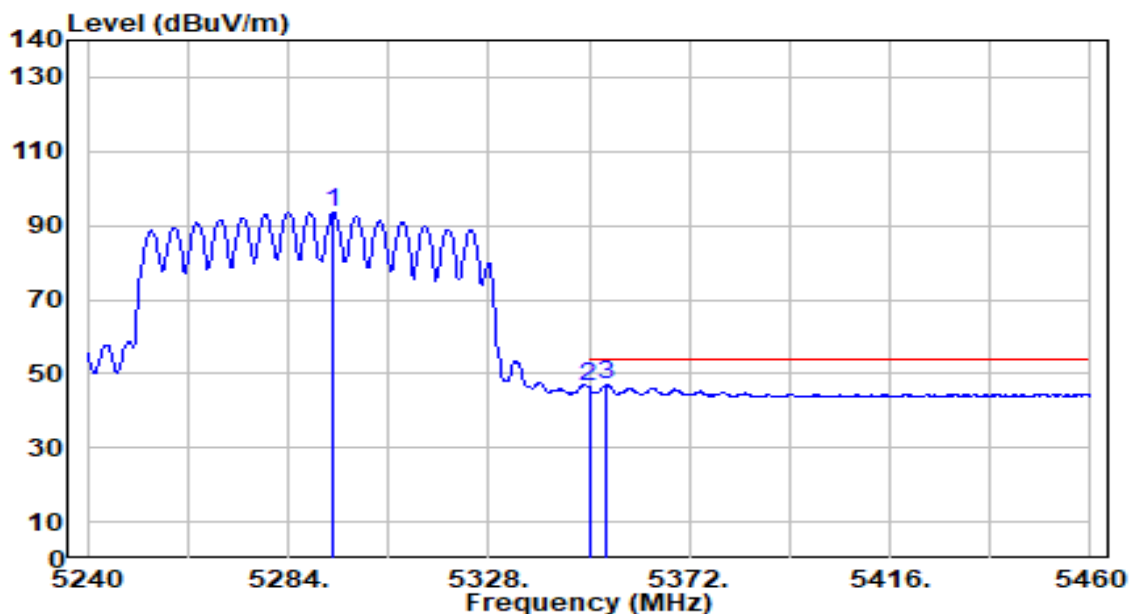


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.900	91.70	1.77	93.47	N/A	N/A	190	277	Average
2	5350.000	44.63	1.69	46.32	-7.68	54.00	190	277	Average
3	* 5353.960	45.30	1.69	46.99	-7.01	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

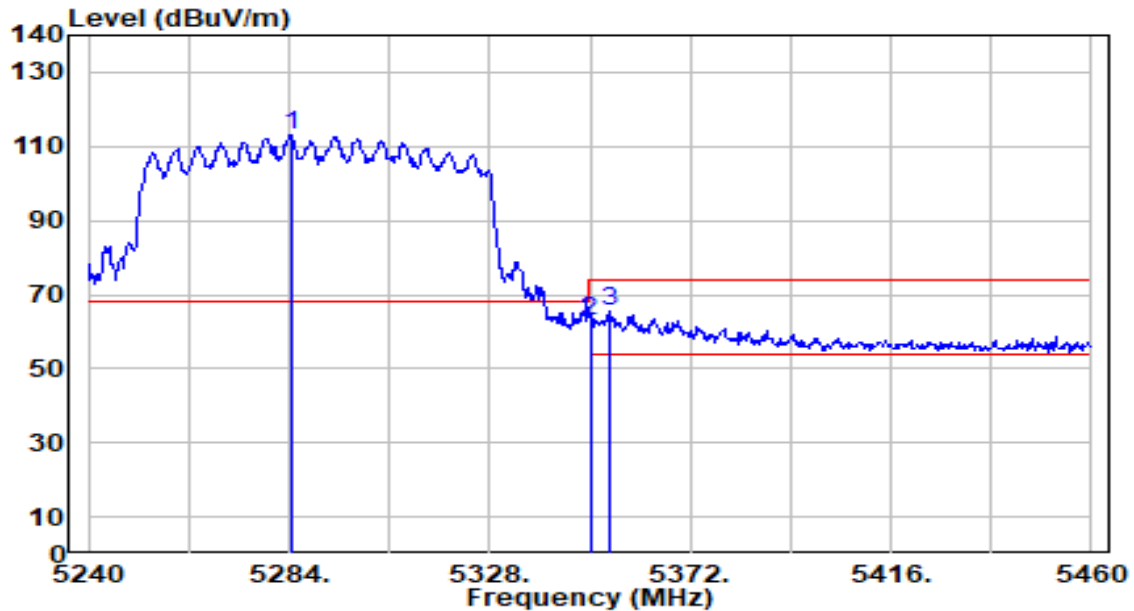


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5284.440	111.32	1.78	113.10	N/A	N/A	192	247	Peak
2	5350.000	61.12	1.69	62.81	-11.19	74.00	192	247	Peak
3	* 5354.180	63.93	1.69	65.61	-8.39	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

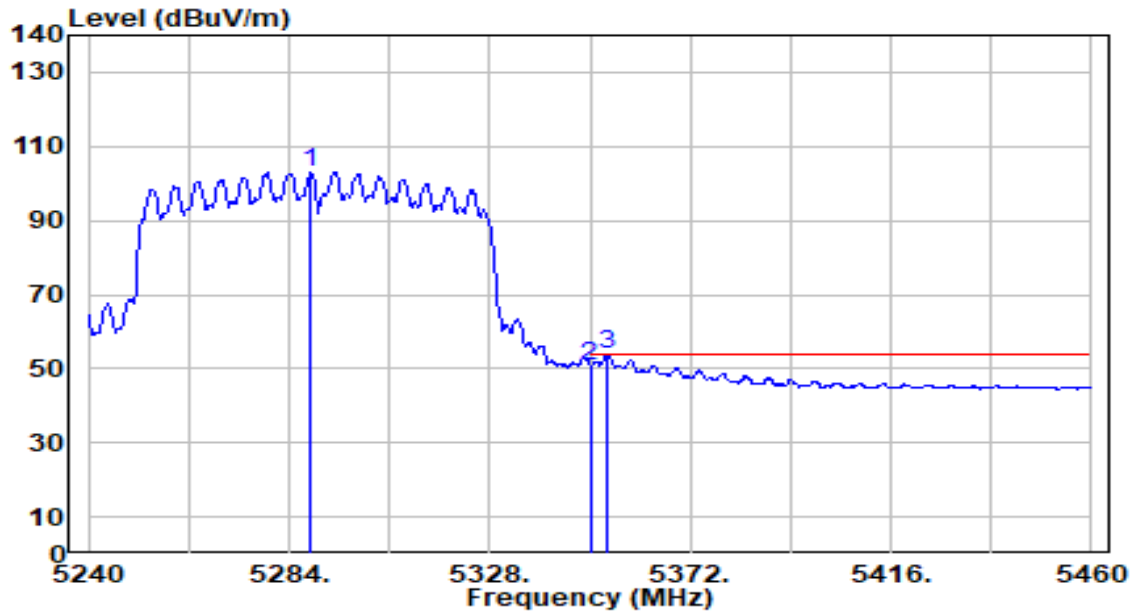


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5288.840	101.09	1.77	102.87	N/A	N/A	192	247	Average
2	5350.000	49.23	1.69	50.92	-3.08	54.00	192	247	Average
3	* 5353.520	52.04	1.69	53.73	-0.27	54.00	192	247	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

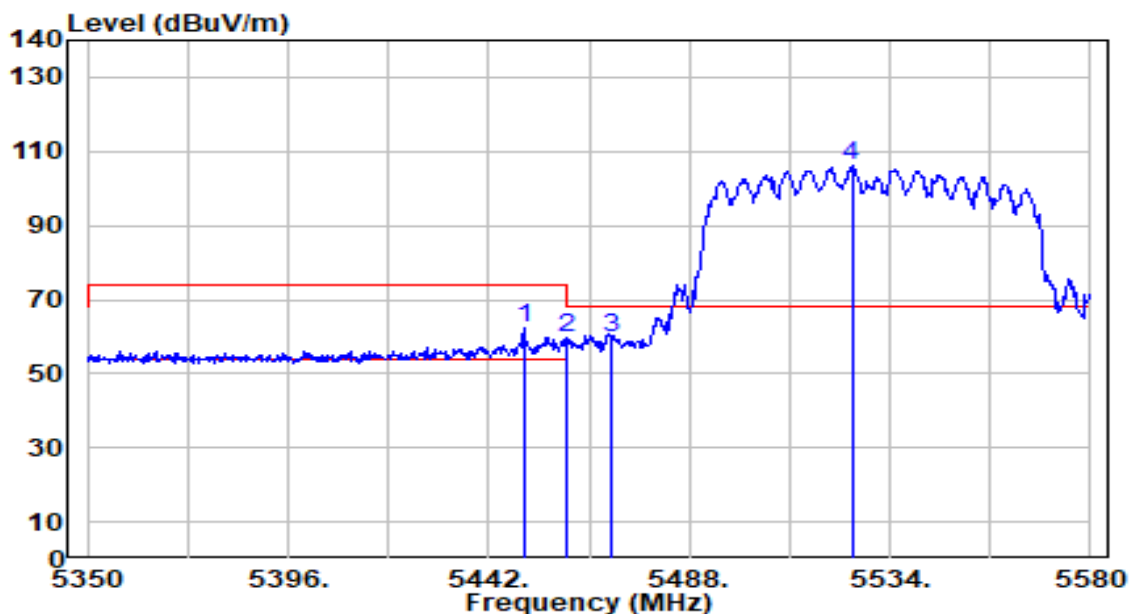


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.050	60.26	1.83	62.10	-11.90	74.00	213	305	Peak
2	5460.000	58.03	1.87	59.91	-14.09	74.00	213	305	Peak
3	* 5470.000	57.62	1.92	59.54	-8.66	68.20	213	305	Peak
4	5525.260	103.93	2.17	106.10	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

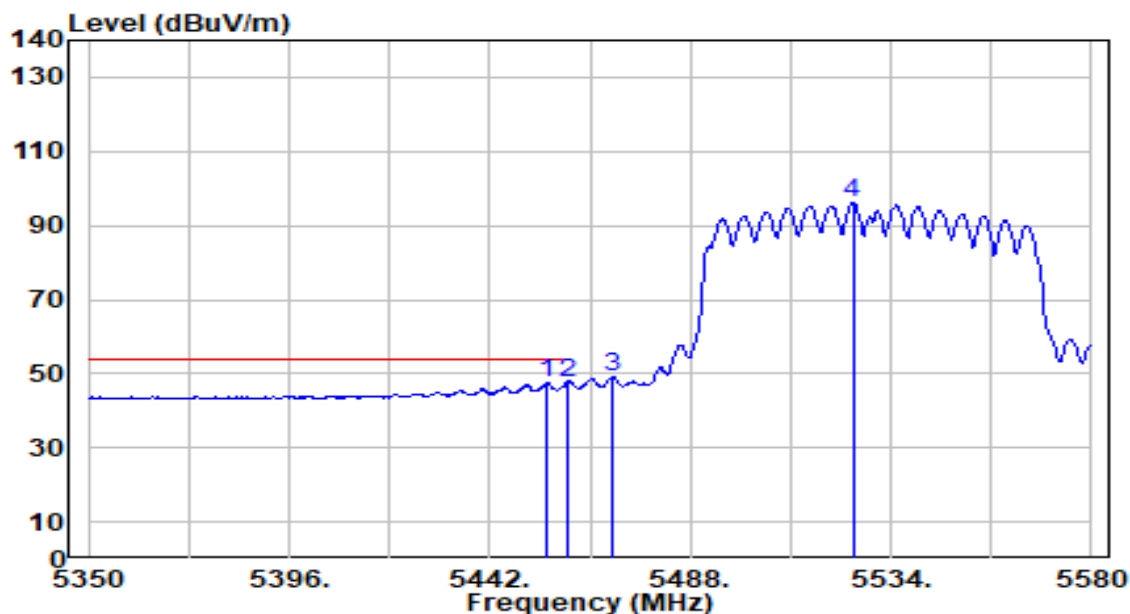


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5455.110	45.46	1.85	47.31	-6.69	54.00	213	305	Average
2	*	5460.000	45.89	1.87	47.77	-6.23	54.00	213	305	Average
3		5470.000	47.13	1.92	49.04	N/A	N/A	213	305	Average
4		5525.260	93.83	2.17	96.00	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

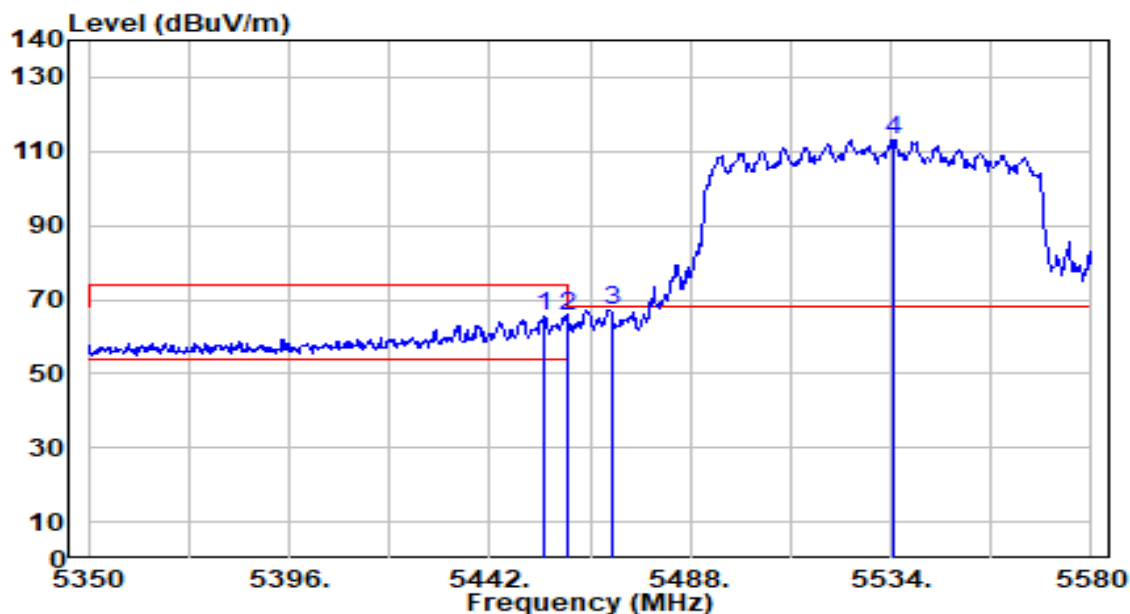


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.650	63.86	1.85	65.71	-8.29	74.00	270	277	Peak
2	5460.000	63.62	1.87	65.49	-8.51	74.00	270	277	Peak
3	* 5470.000	65.35	1.92	67.27	-0.93	68.20	270	277	Peak
4	5534.460	110.97	2.21	113.18	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

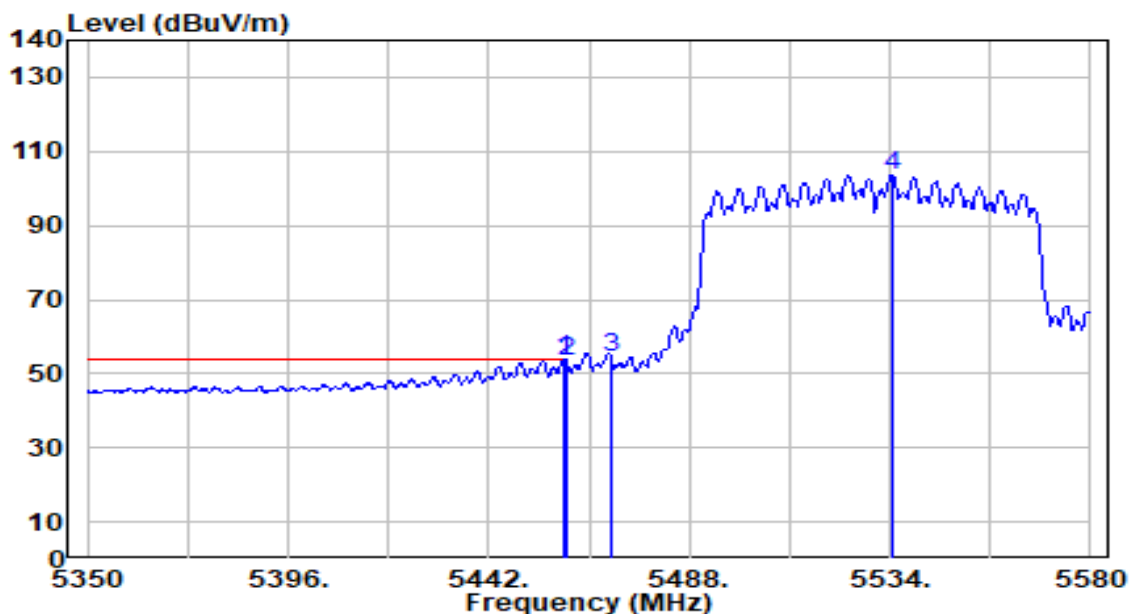


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.020	51.93	1.87	53.80	-0.20	54.00	270	277	Average
2		5460.000	51.30	1.87	53.18	-0.82	54.00	270	277	Average
3		5470.000	52.24	1.92	54.15	N/A	N/A	270	277	Average
4		5534.460	101.57	2.21	103.78	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

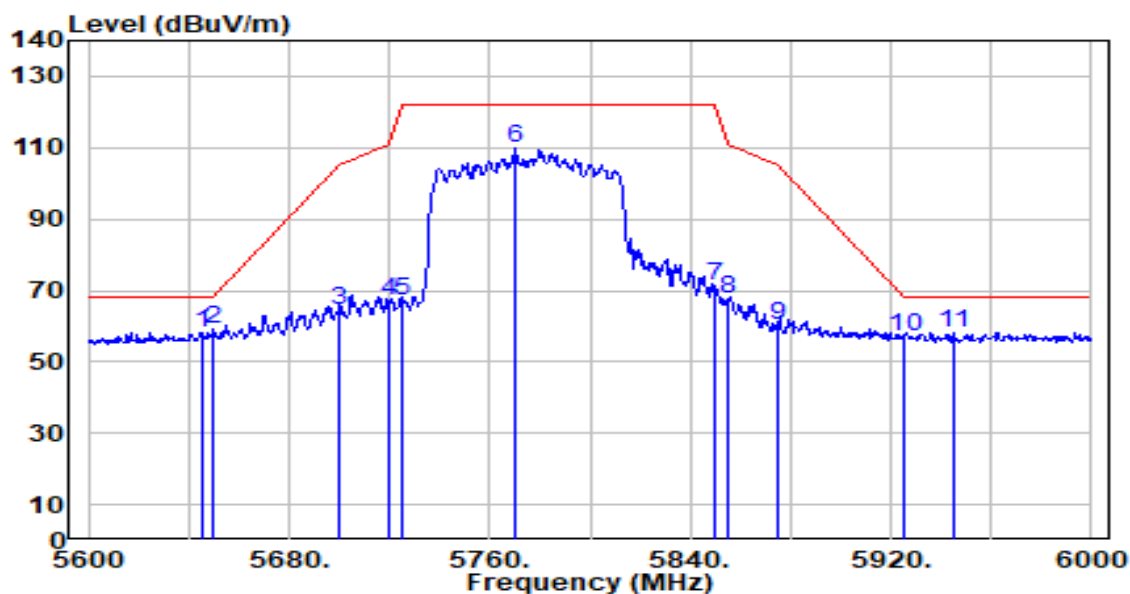


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5645.200	55.51	2.75	58.26	-9.94	68.20	194	304	Peak
2	* 5650.000	56.46	2.78	59.24	-8.96	68.20	194	304	Peak
3	5700.000	61.48	3.02	64.50	-40.70	105.20	194	304	Peak
4	5720.000	64.06	3.12	67.18	-43.62	110.80	194	304	Peak
5	5725.000	64.06	3.14	67.20	-55.00	122.20	194	304	Peak
6	5770.400	106.38	3.37	109.75	N/A	N/A	194	304	Peak
7	5850.000	67.93	3.51	71.44	-50.76	122.20	194	304	Peak
8	5855.000	64.11	3.51	67.62	-43.18	110.80	194	304	Peak
9	5875.000	56.67	3.50	60.18	-45.02	105.20	194	304	Peak
10	5925.000	53.60	3.51	57.11	-11.09	68.20	194	304	Peak
11	5945.200	54.70	3.52	58.22	-9.98	68.20	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

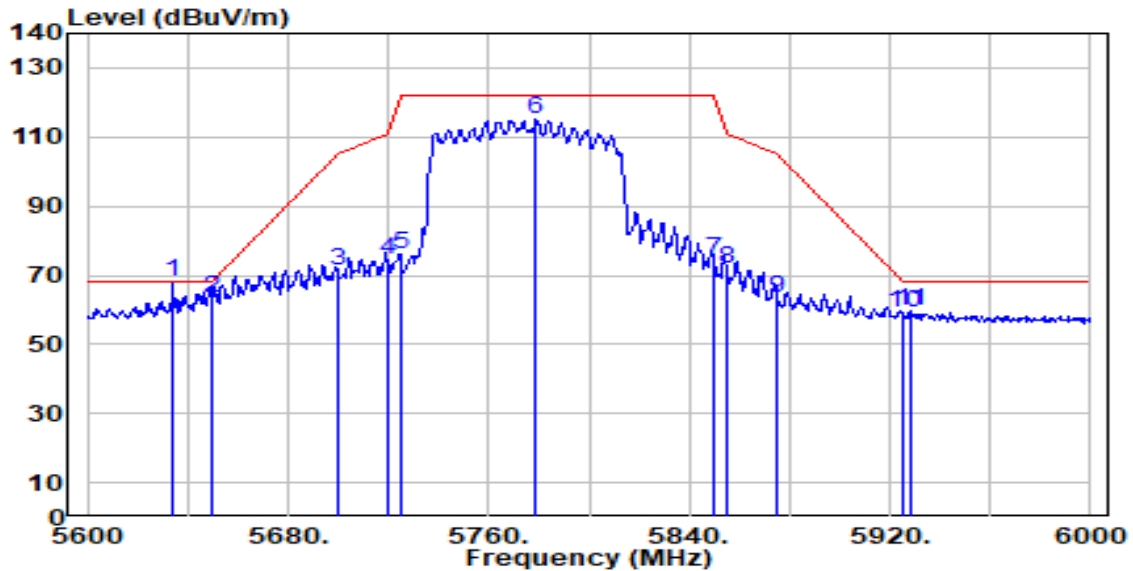


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5634.000	65.26	2.70	67.96	-0.24	68.20	167	270	Peak
2		5650.000	60.64	2.78	63.41	-4.79	68.20	167	270	Peak
3		5700.000	68.14	3.02	71.16	-34.04	105.20	167	270	Peak
4		5720.000	71.34	3.12	74.45	-36.35	110.80	167	270	Peak
5		5725.000	73.18	3.14	76.32	-45.88	122.20	167	270	Peak
6		5778.800	111.68	3.41	115.09	N/A	N/A	167	270	Peak
7		5850.000	70.82	3.51	74.33	-47.87	122.20	167	270	Peak
8		5855.000	68.27	3.51	71.78	-39.02	110.80	167	270	Peak
9		5875.000	60.07	3.50	63.58	-41.62	105.20	167	270	Peak
10		5925.000	55.65	3.51	59.16	-9.04	68.20	167	270	Peak
11		5928.400	56.18	3.51	59.69	-8.51	68.20	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

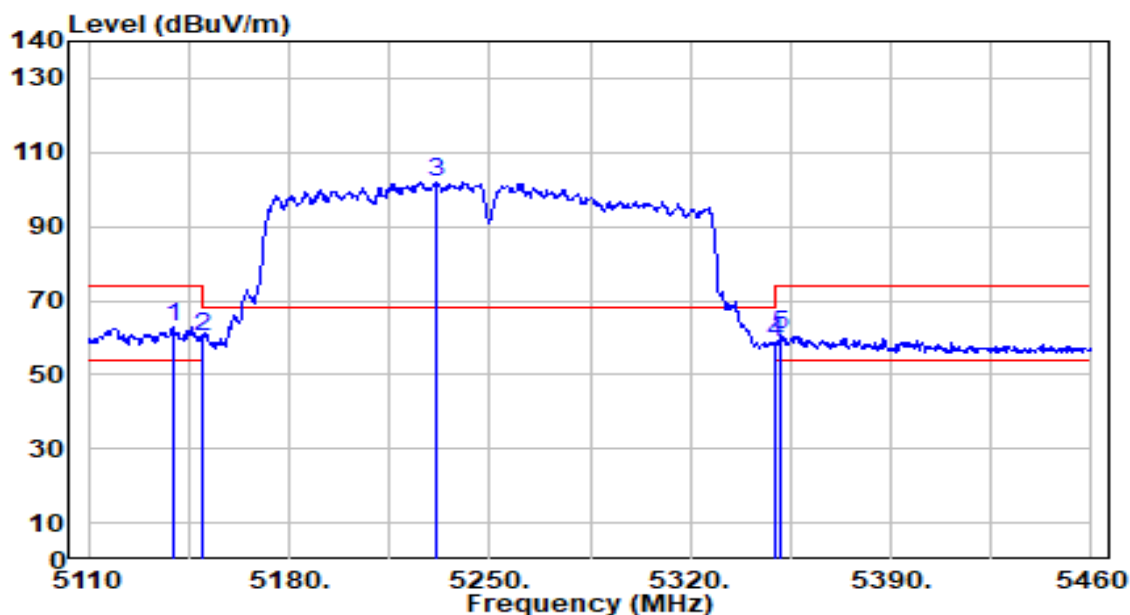


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.400	61.03	1.80	62.83	-11.17	74.00	143	343	Peak
2		5150.000	58.32	1.82	60.14	-13.86	74.00	143	343	Peak
3		5231.100	100.32	1.86	102.18	N/A	N/A	143	343	Peak
4		5350.000	56.80	1.69	58.49	-15.51	74.00	143	343	Peak
5		5351.500	58.99	1.69	60.68	-13.32	74.00	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

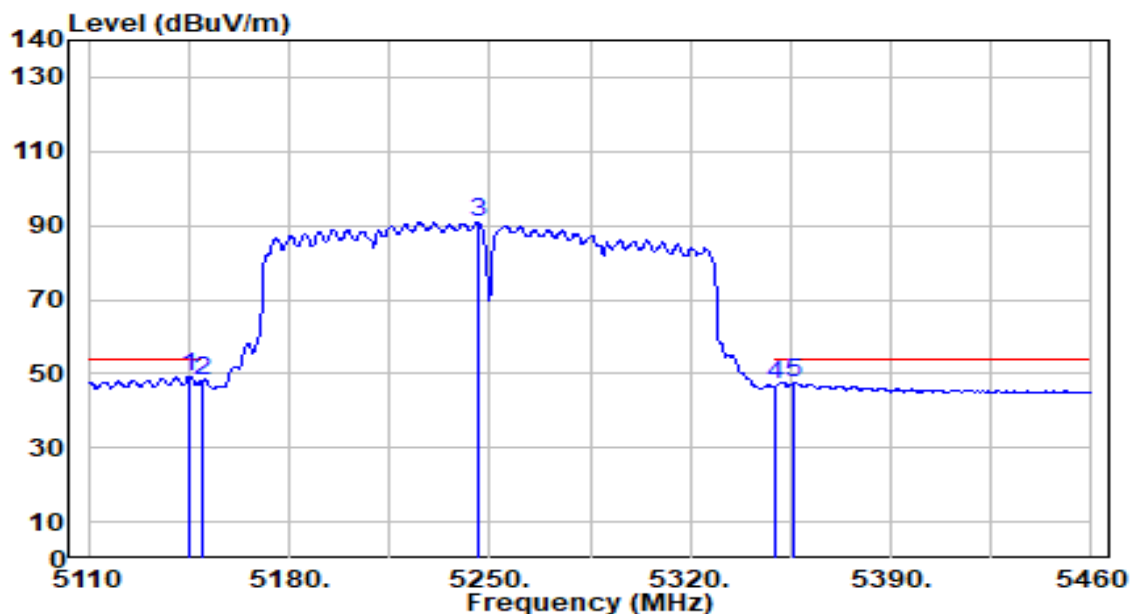


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.350	47.34	1.81	49.15	-4.85	54.00	143	343	Average
2		5150.000	46.37	1.82	48.19	-5.81	54.00	143	343	Average
3		5246.150	89.15	1.84	90.98	N/A	N/A	143	343	Average
4		5350.000	45.18	1.69	46.88	-7.12	54.00	143	343	Average
5		5356.400	45.90	1.68	47.59	-6.41	54.00	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

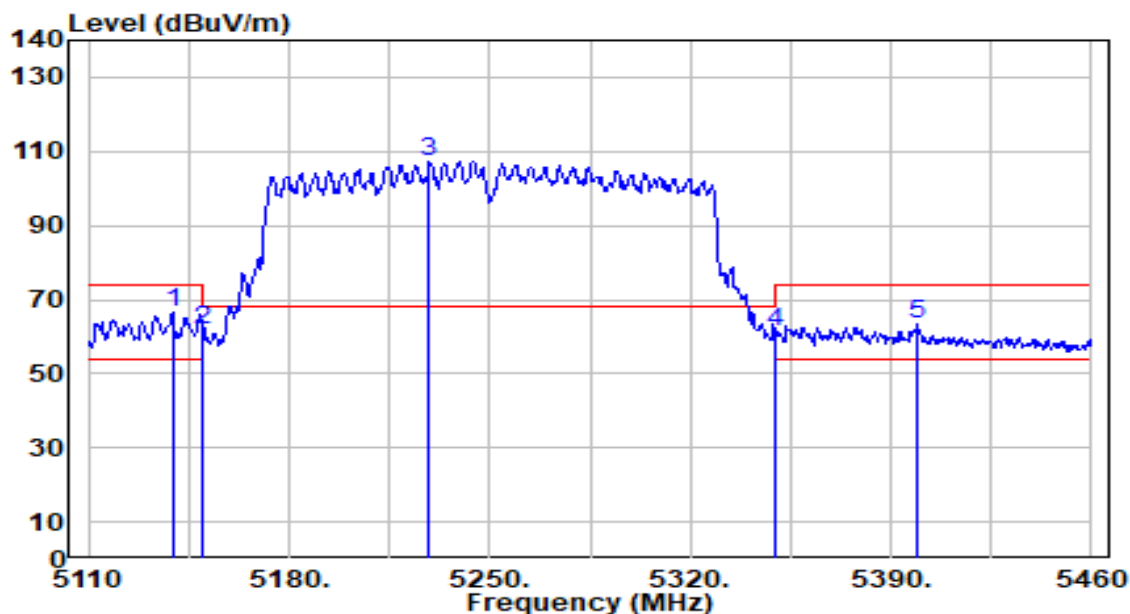


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.400	64.54	1.80	66.34	-7.66	74.00	194	304	Peak
2		5150.000	60.01	1.82	61.82	-12.18	74.00	194	304	Peak
3		5229.000	105.55	1.86	107.41	N/A	N/A	194	304	Peak
4		5350.000	59.80	1.69	61.49	-12.51	74.00	194	304	Peak
5		5399.450	61.75	1.62	63.37	-10.63	74.00	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

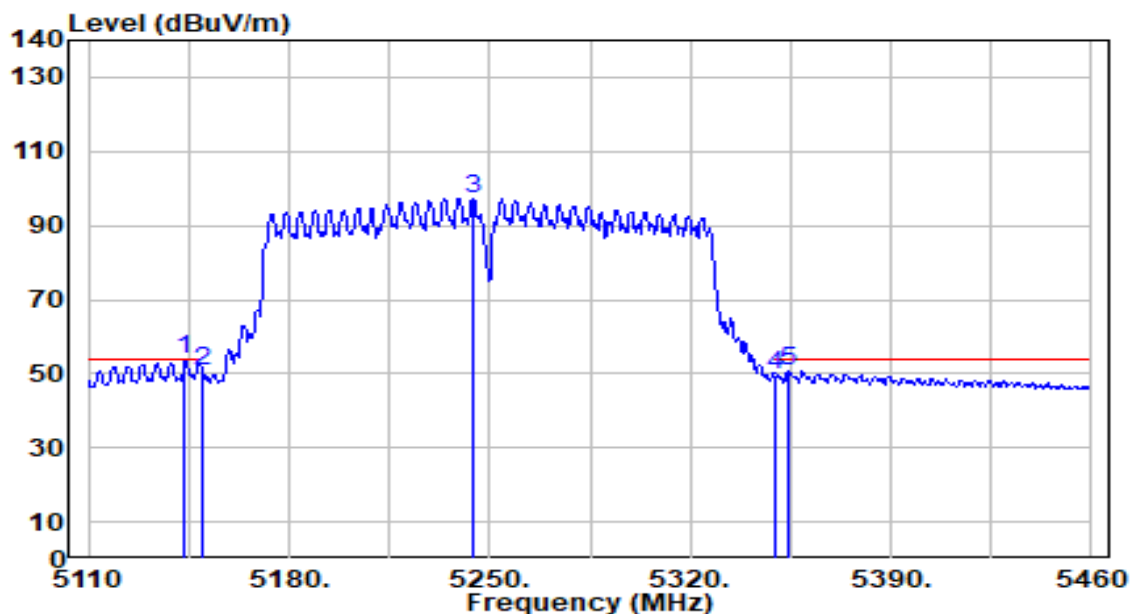


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.600	51.89	1.81	53.70	-0.30	54.00	194	304	Average
2		5150.000	48.98	1.82	50.80	-3.20	54.00	194	304	Average
3		5244.400	95.26	1.84	97.09	N/A	N/A	194	304	Average
4		5350.000	47.79	1.69	49.48	-4.52	54.00	194	304	Average
5		5354.300	48.89	1.69	50.57	-3.43	54.00	194	304	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

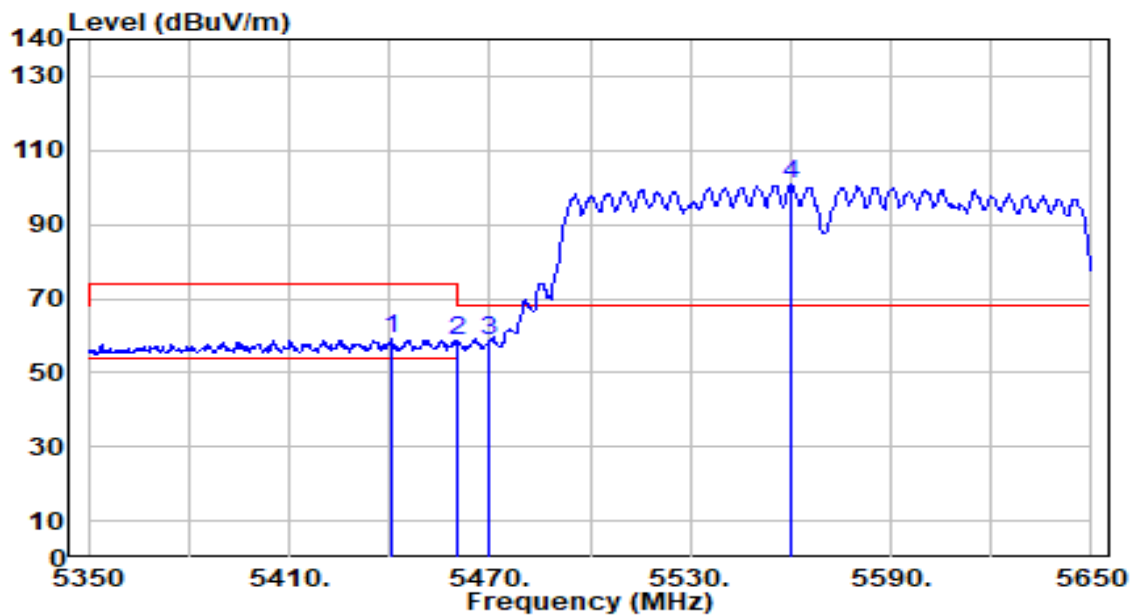


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5440.600	57.34	1.79	59.13	-14.87	74.00	213	305	Peak
2	5460.000	56.67	1.87	58.54	-15.46	74.00	213	305	Peak
3	* 5470.000	56.67	1.92	58.58	-9.62	68.20	213	305	Peak
4	5560.000	98.62	2.34	100.95	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

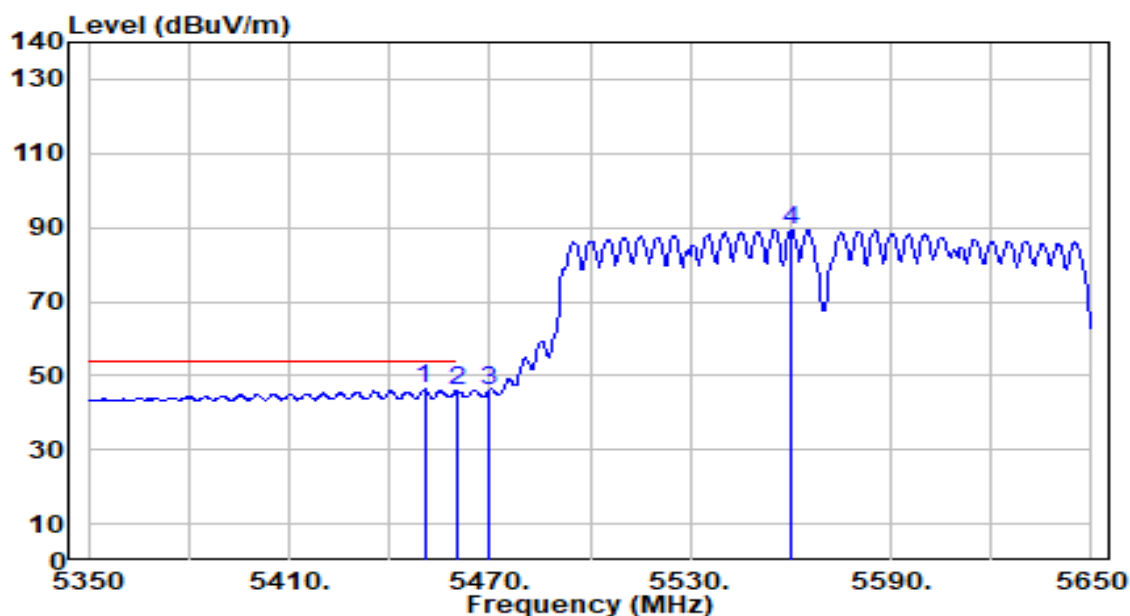


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.500	44.44	1.83	46.27	-7.73	54.00	213	305	Average
2		5460.000	44.13	1.87	46.00	-8.00	54.00	213	305	Average
3		5470.000	44.25	1.92	46.17	N/A	N/A	213	305	Average
4		5560.300	86.98	2.34	89.32	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

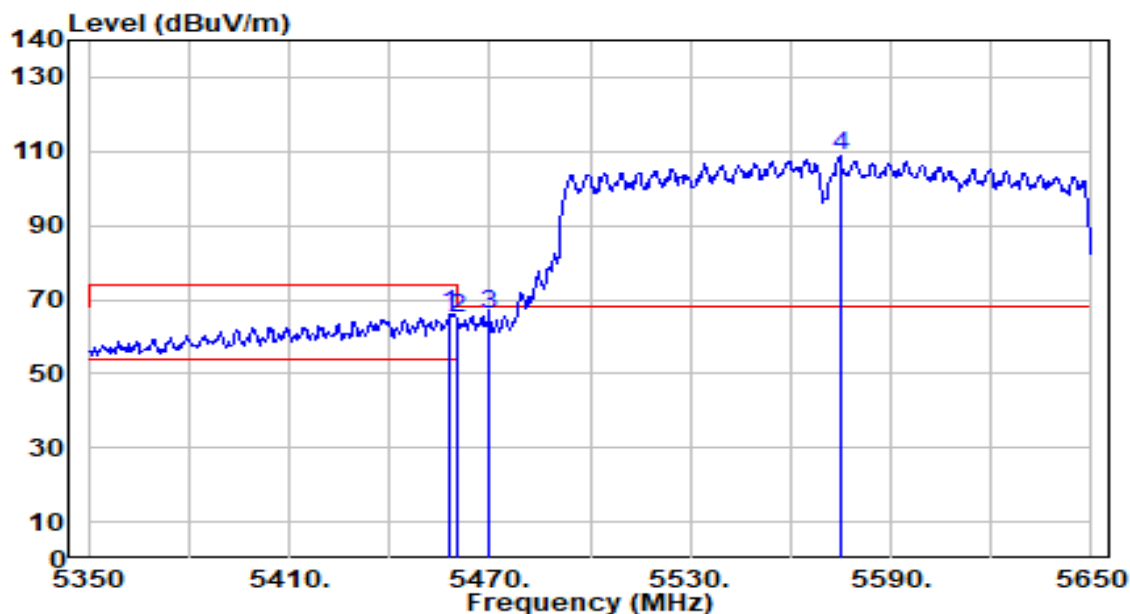


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.300	64.03	1.87	65.90	-8.10	74.00	270	277	Peak
2	5460.000	62.89	1.87	64.76	-9.24	74.00	270	277	Peak
3	* 5470.000	64.10	1.92	66.02	-2.18	68.20	270	277	Peak
4	5575.000	106.20	2.41	108.61	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

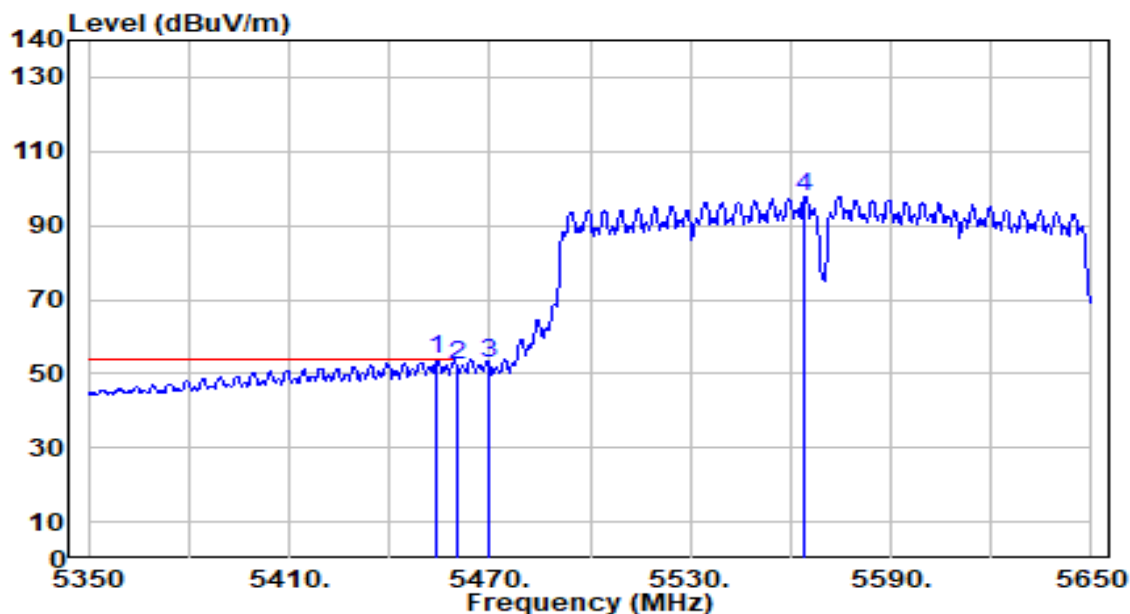


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.400	51.88	1.85	53.73	-0.27	54.00	270	277	Average
2		5460.000	50.56	1.87	52.43	-1.57	54.00	270	277	Average
3		5470.000	50.68	1.92	52.59	N/A	N/A	270	277	Average
4		5564.200	95.52	2.36	97.88	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

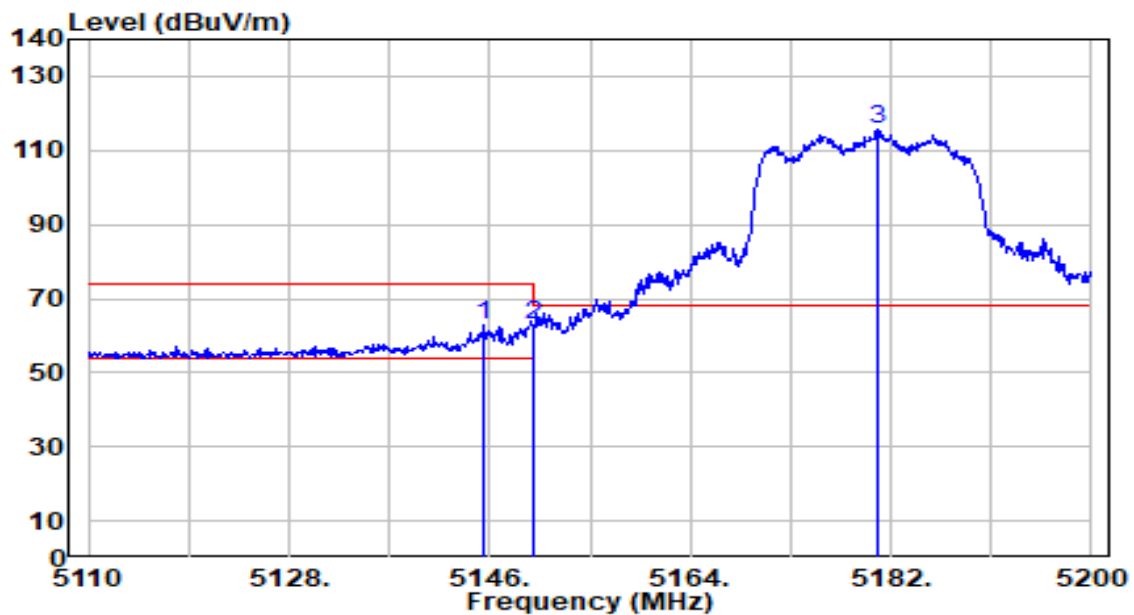


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5145.460	61.09	1.81	62.90	-11.10	74.00	143	343	Peak
2	*	5150.000	61.23	1.82	63.05	-10.95	74.00	143	343	Peak
3		5180.740	113.73	1.87	115.60	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

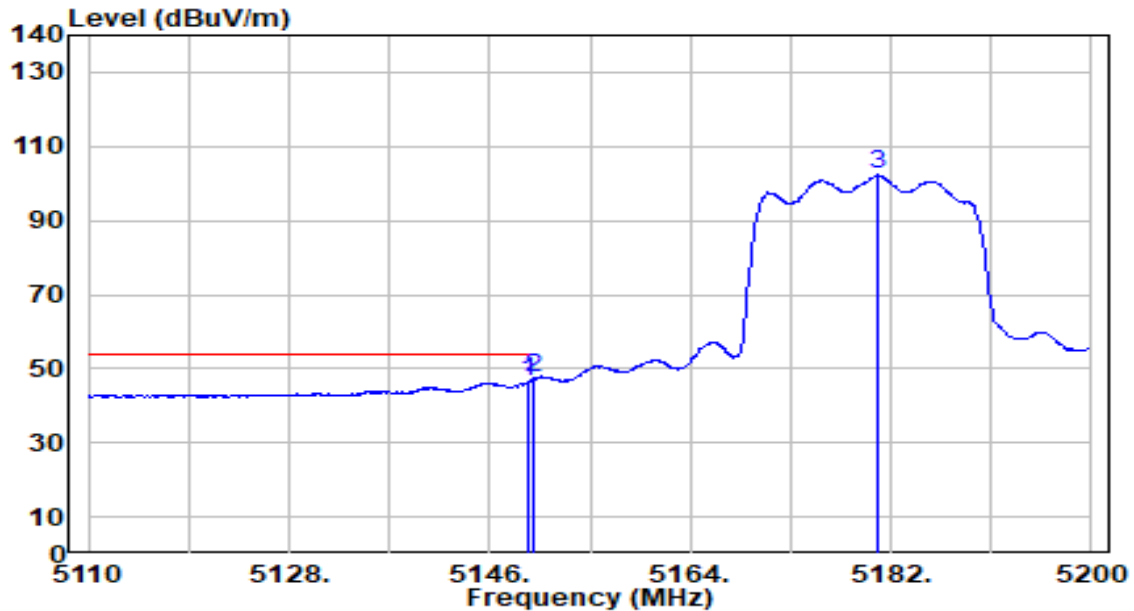


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	44.47	1.82	46.29	-7.71	54.00	143	343	Average
2	*	5150.000	45.46	1.82	47.28	-6.72	54.00	143	343	Average
3		5180.920	100.37	1.87	102.24	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

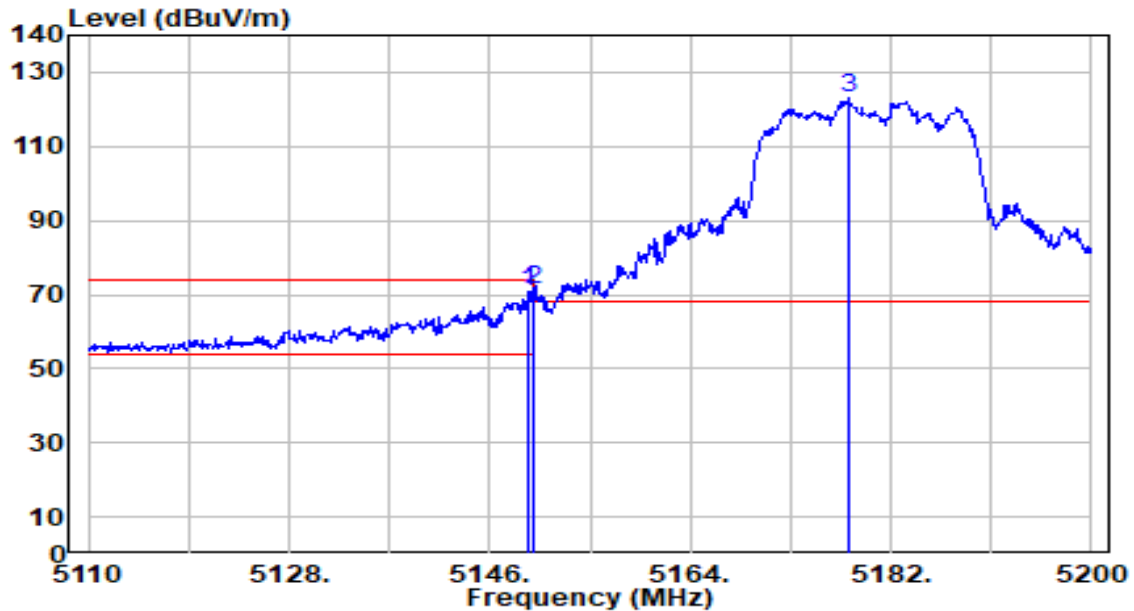


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	68.80	1.82	70.61	-3.39	74.00	195	159	Peak
2	*	5150.000	69.32	1.82	71.14	-2.86	74.00	195	159	Peak
3		5178.130	121.42	1.87	123.29	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

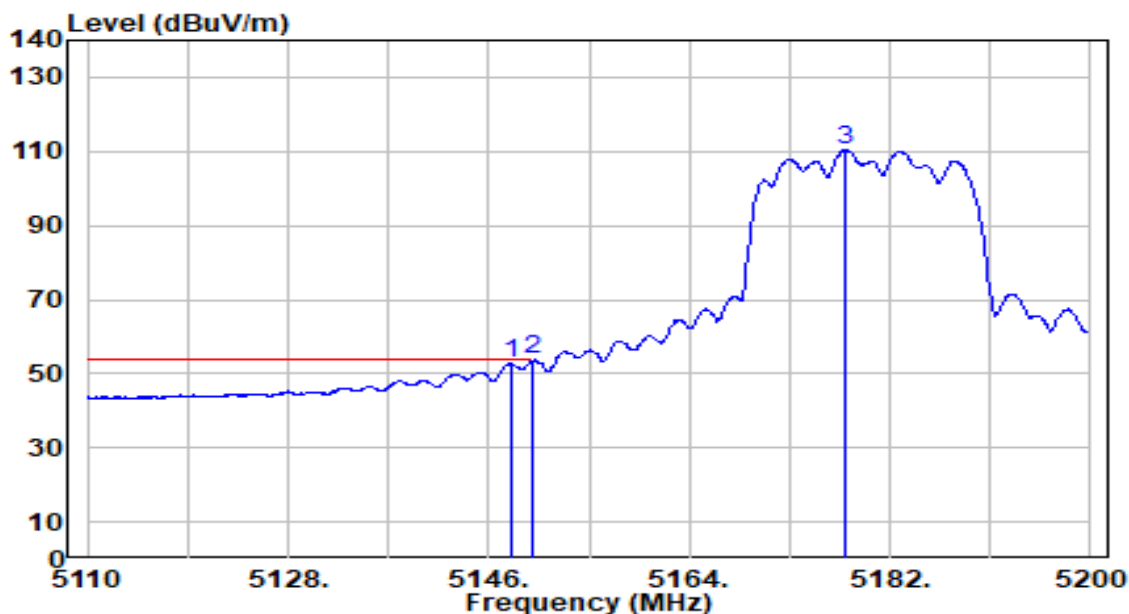


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.070	50.97	1.82	52.78	-1.22	54.00	195	159	Average
2	*	5150.000	51.92	1.82	53.74	-0.26	54.00	195	159	Average
3		5178.040	108.59	1.87	110.46	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

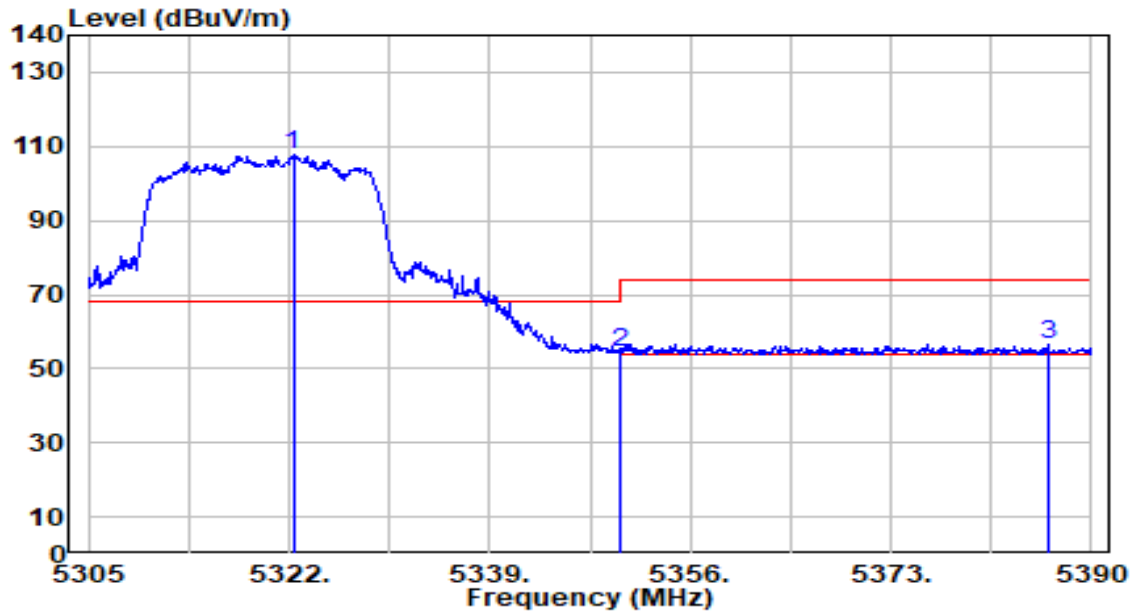


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.340	105.80	1.73	107.53	N/A	N/A	190	277	Peak
2	5350.000	52.96	1.69	54.65	-19.35	74.00	190	277	Peak
3	* 5386.260	54.94	1.64	56.59	-17.41	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

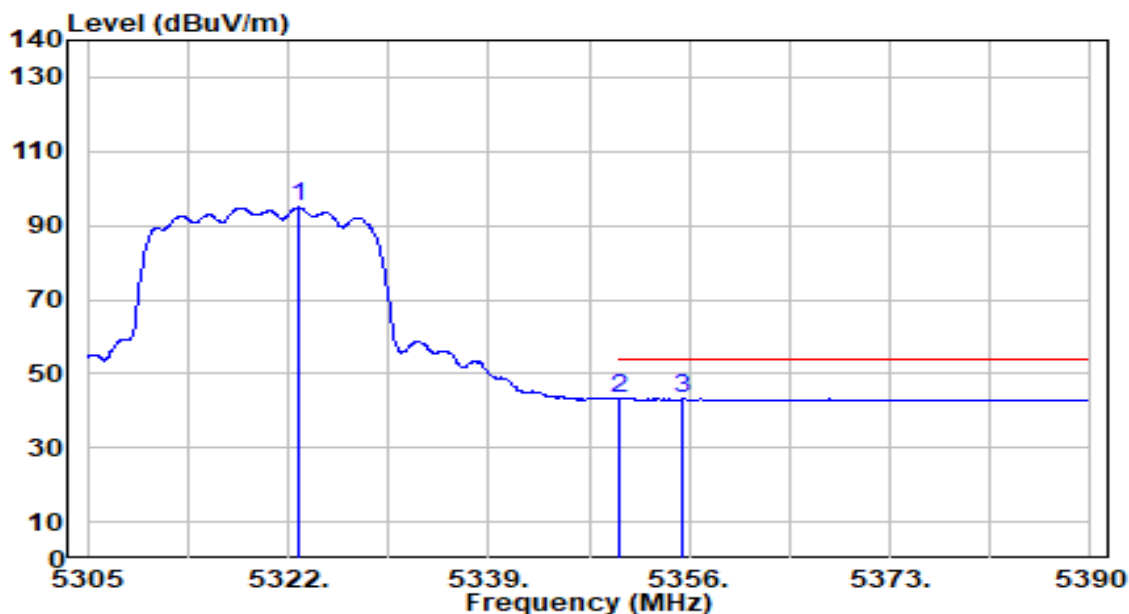


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.850	93.13	1.73	94.86	N/A	N/A	190	277	Average
2	5350.000	41.61	1.69	43.30	-10.70	54.00	190	277	Average
3	* 5355.320	41.65	1.68	43.33	-10.67	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

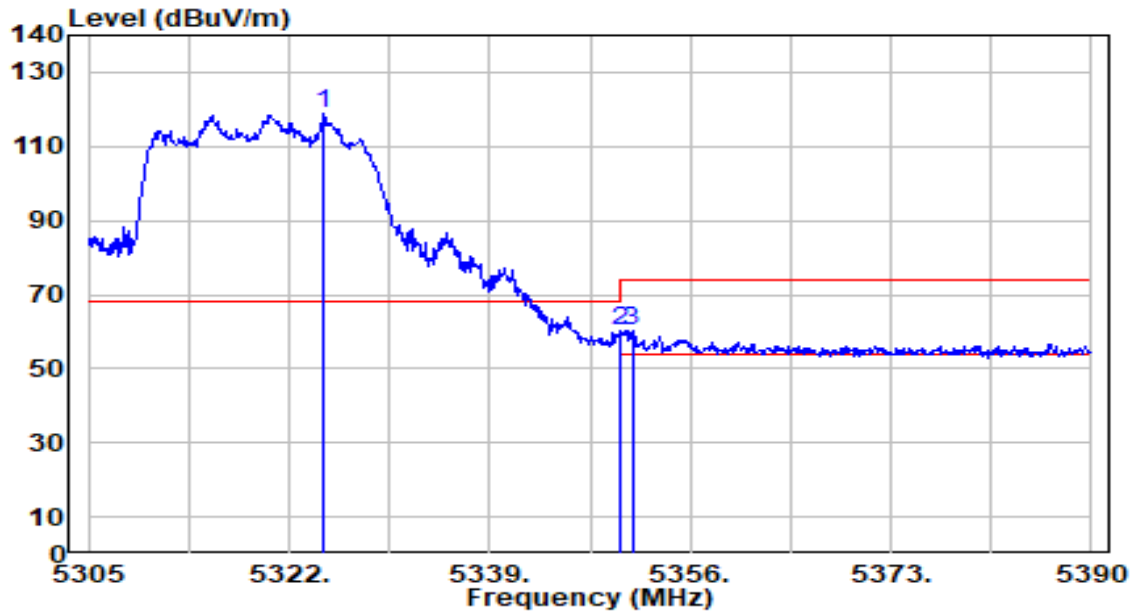


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5324.890	117.14	1.72	118.86	N/A	N/A	192	247	Peak
2	*	5350.000	58.79	1.69	60.48	-13.52	74.00	192	247	Peak
3		5351.070	58.52	1.69	60.21	-13.79	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

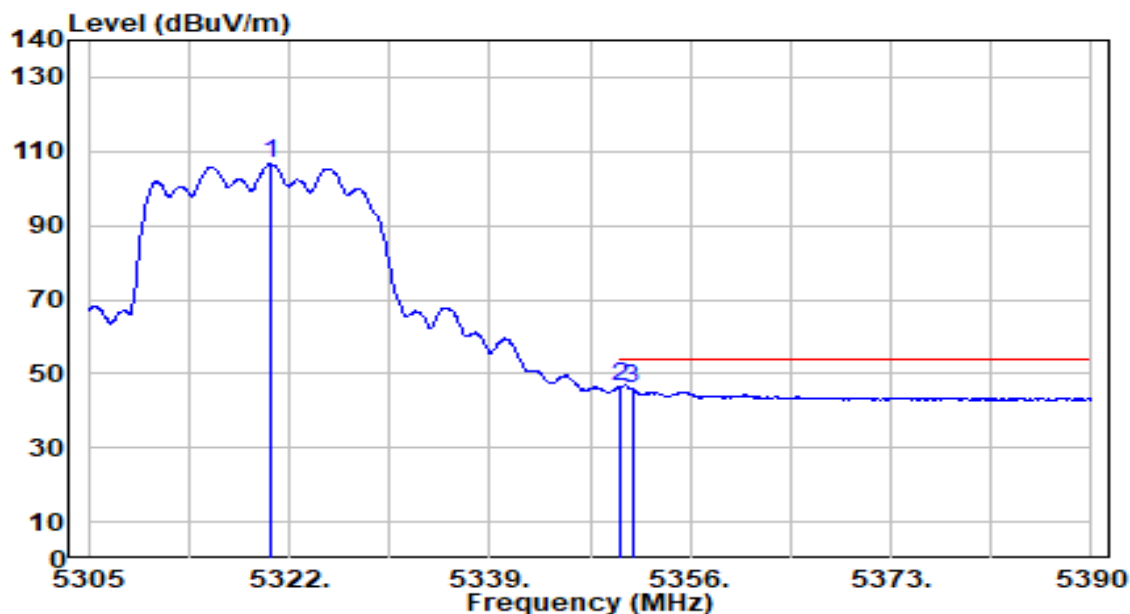


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5320.555	105.01	1.73	106.74	N/A	N/A	192	247	Average
2	*	5350.000	44.83	1.69	46.52	-7.48	54.00	192	247	Average
3		5351.070	44.36	1.69	46.05	-7.95	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

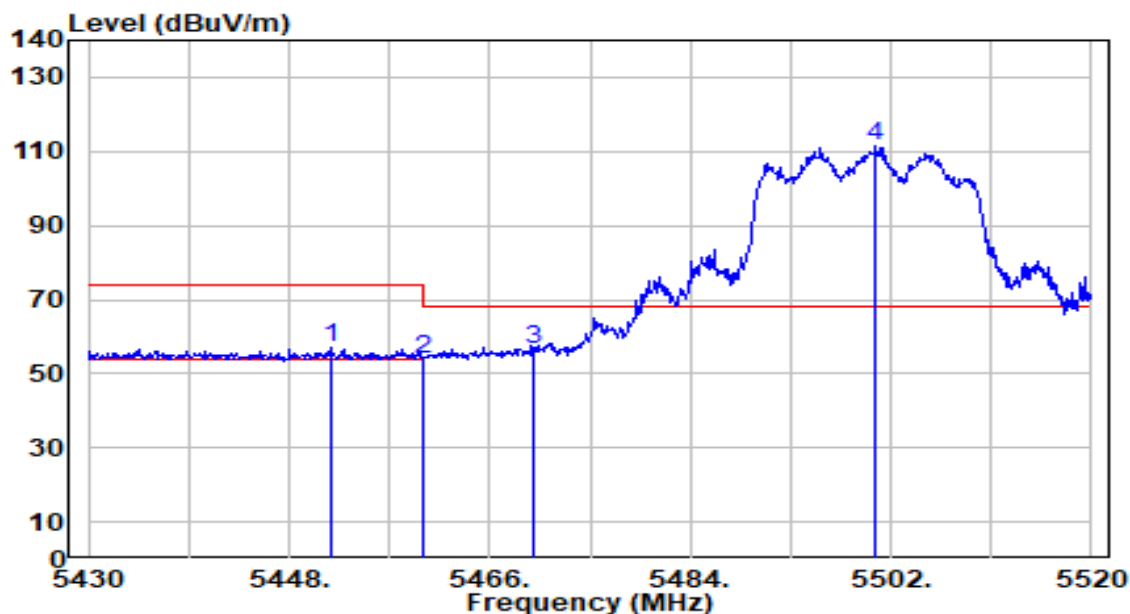


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.780	55.28	1.84	57.12	-16.88	74.00	213	305	Peak
2	5460.000	52.18	1.87	54.06	-19.94	74.00	213	305	Peak
3	* 5470.000	54.86	1.92	56.78	-11.42	68.20	213	305	Peak
4	5500.560	109.64	2.04	111.69	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

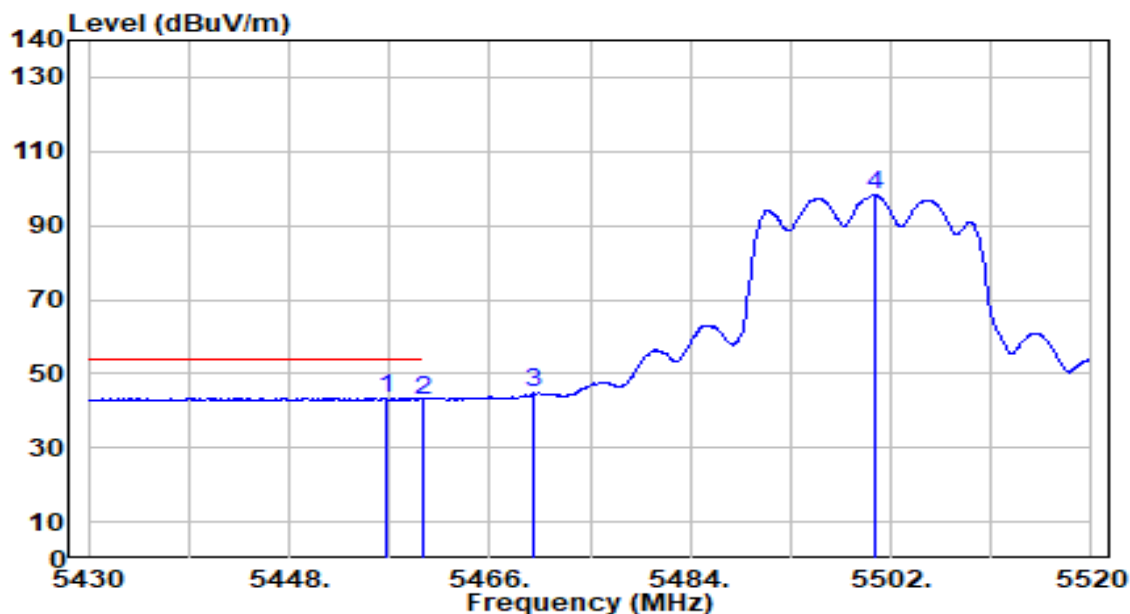


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.640	41.50	1.86	43.36	-10.64	54.00	213	305	Average
2		5460.000	41.16	1.87	43.04	-10.96	54.00	213	305	Average
3		5470.000	42.75	1.92	44.66	N/A	N/A	213	305	Average
4		5500.560	96.20	2.04	98.25	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

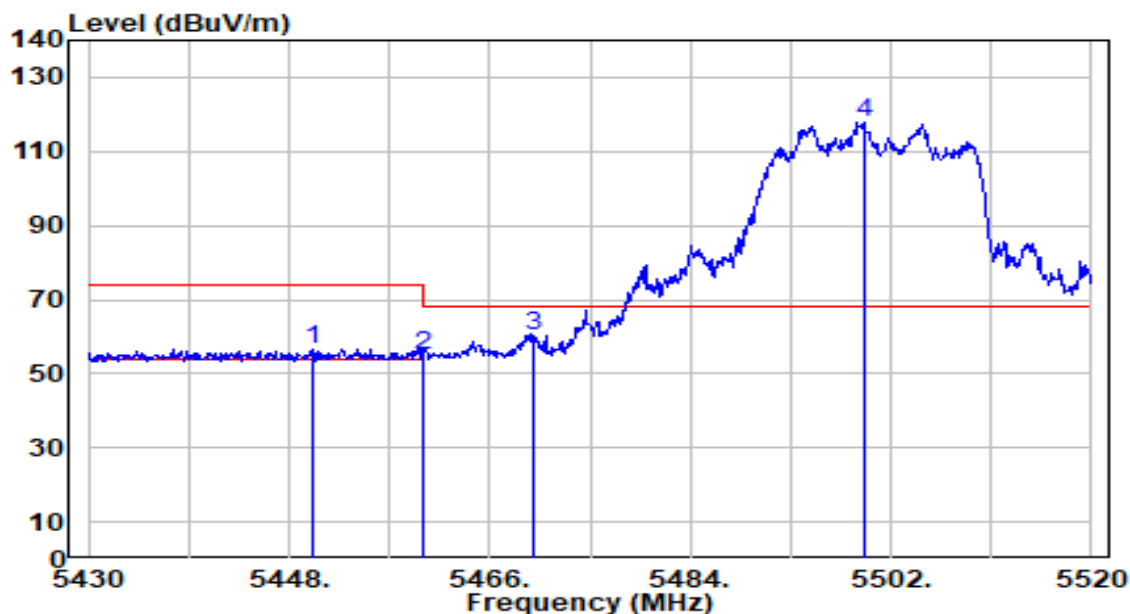


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.160	54.79	1.83	56.62	-17.38	74.00	270	277	Peak
2	5460.000	53.17	1.87	55.04	-18.96	74.00	270	277	Peak
3	* 5470.000	58.06	1.92	59.97	-8.23	68.20	270	277	Peak
4	5499.570	115.85	2.04	117.89	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

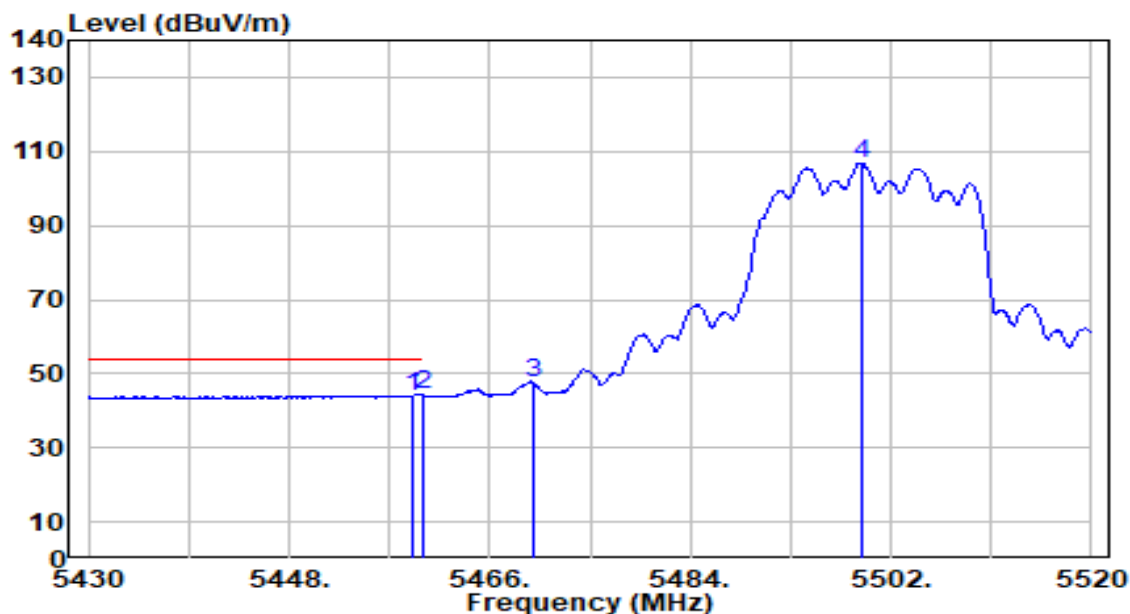


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.980	42.23	1.87	44.10	-9.90	54.00	270	277	Average
2	*	5460.000	42.57	1.87	44.44	-9.56	54.00	270	277	Average
3		5470.000	45.43	1.92	47.35	N/A	N/A	270	277	Average
4		5499.480	104.85	2.04	106.89	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

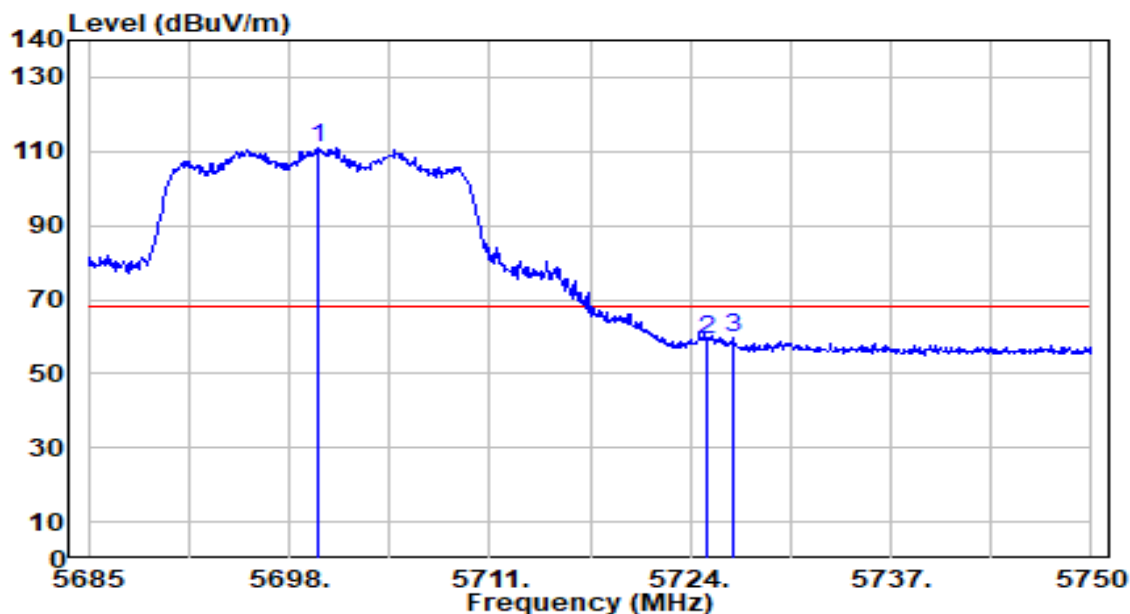


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.820	108.15	3.02	111.16	N/A	N/A	188	304	Peak
2	5725.000	56.10	3.14	59.24	-8.96	68.20	188	304	Peak
3	* 5726.730	56.63	3.15	59.78	-8.42	68.20	188	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

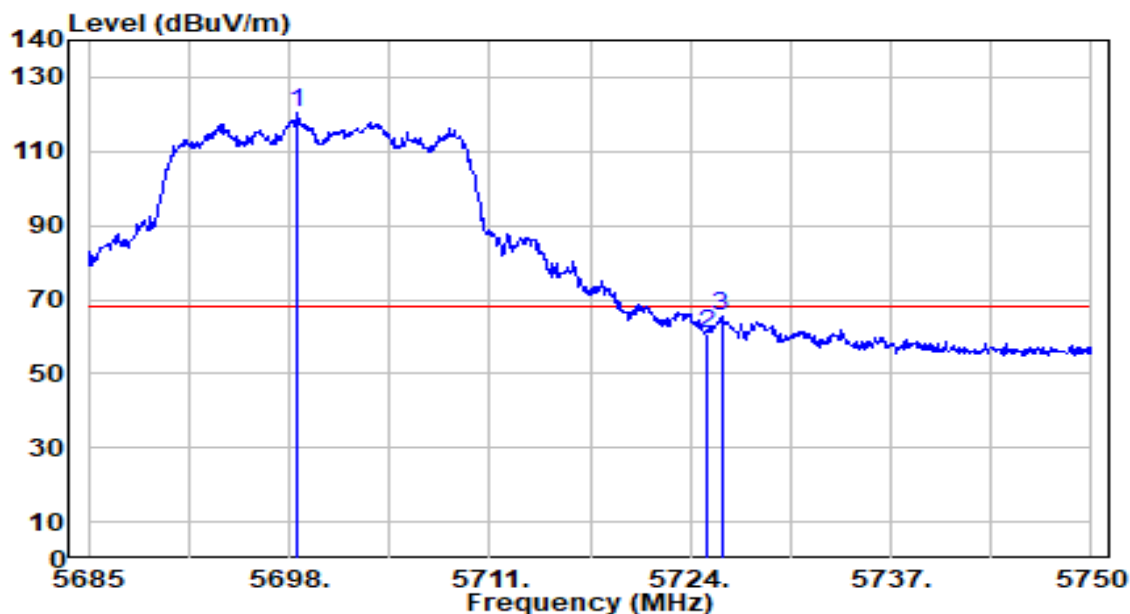


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.520	117.53	3.01	120.54	N/A	N/A	157	265	Peak
2	5725.000	57.56	3.14	60.70	-7.50	68.20	157	265	Peak
3	* 5726.015	62.57	3.15	65.72	-2.48	68.20	157	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

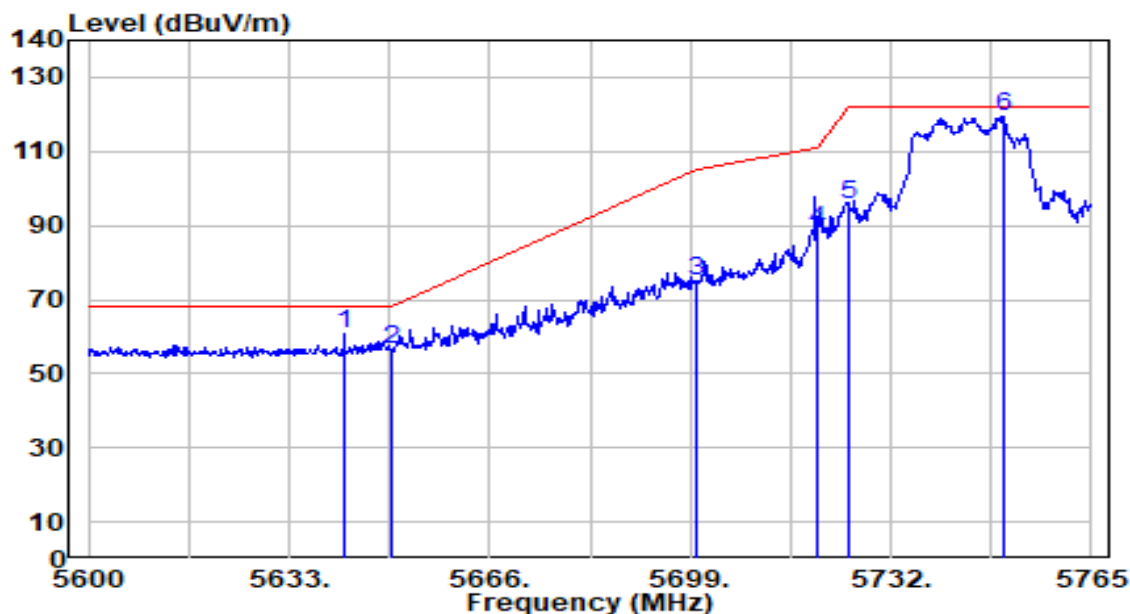


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.075	58.12	2.74	60.86	-7.34	68.20	194	304	Peak
2		5650.000	53.97	2.78	56.75	-11.45	68.20	194	304	Peak
3		5700.000	71.81	3.02	74.83	-30.37	105.20	194	304	Peak
4		5720.000	85.69	3.12	88.80	-22.00	110.80	194	304	Peak
5		5725.000	92.66	3.14	95.80	-26.40	122.20	194	304	Peak
6		5750.480	116.15	3.27	119.42	N/A	N/A	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

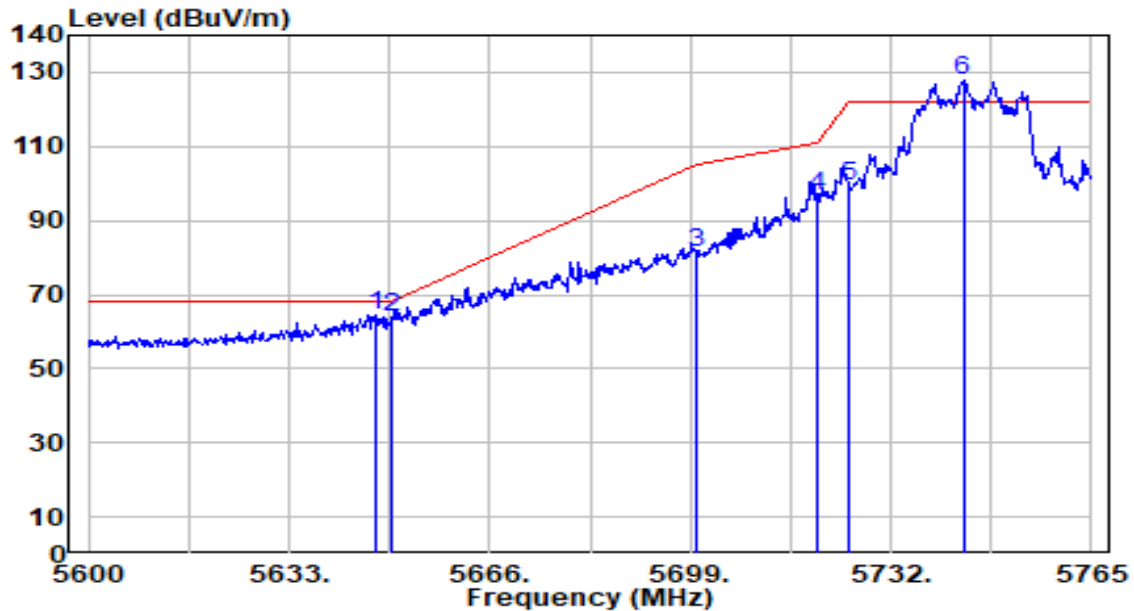


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.355	61.88	2.76	64.64	-3.56	68.20	167	270	Peak
2		5650.000	61.13	2.78	63.91	-4.29	68.20	167	270	Peak
3		5700.000	78.12	3.02	81.14	-24.06	105.20	167	270	Peak
4		5720.000	93.34	3.12	96.46	-14.34	110.80	167	270	Peak
5		5725.000	96.02	3.14	99.16	-23.04	122.20	167	270	Peak
6		5743.880	124.87	3.23	128.10	N/A	N/A	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

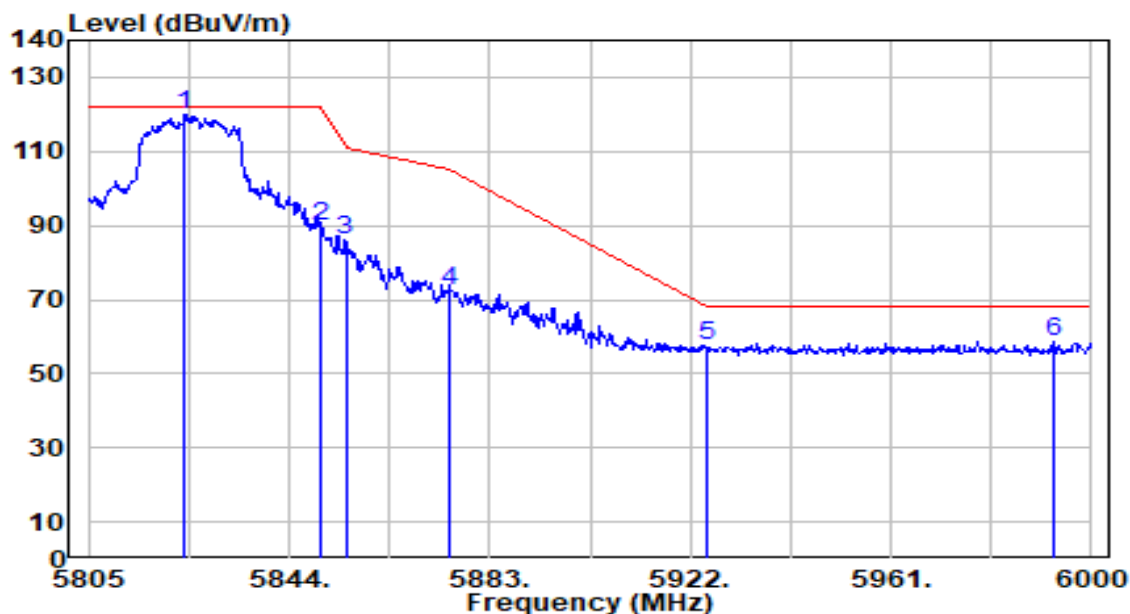


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.720	116.44	3.51	119.96	N/A	N/A	182	305	Peak
2	5850.000	86.07	3.51	89.58	-32.62	122.20	182	305	Peak
3	5855.000	82.78	3.51	86.29	-24.51	110.80	182	305	Peak
4	5875.000	69.01	3.50	72.51	-32.69	105.20	182	305	Peak
5	5925.000	54.14	3.51	57.65	-10.55	68.20	182	305	Peak
6	* 5992.785	55.28	3.54	58.82	-9.38	68.20	182	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

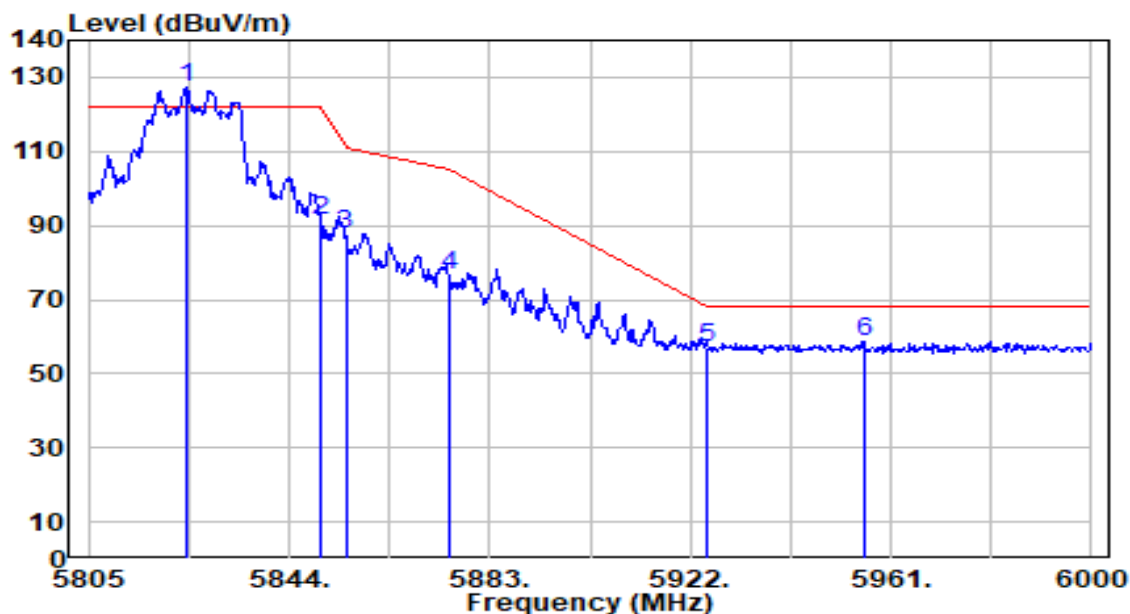


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.915	123.81	3.51	127.32	N/A	N/A	184	273	Peak
2	5850.000	87.71	3.51	91.21	-30.99	122.20	184	273	Peak
3	5855.000	84.38	3.51	87.89	-22.91	110.80	184	273	Peak
4	5875.000	73.13	3.50	76.64	-28.56	105.20	184	273	Peak
5	5925.000	53.56	3.51	57.07	-11.13	68.20	184	273	Peak
6	* 5955.735	55.05	3.52	58.58	-9.62	68.20	184	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

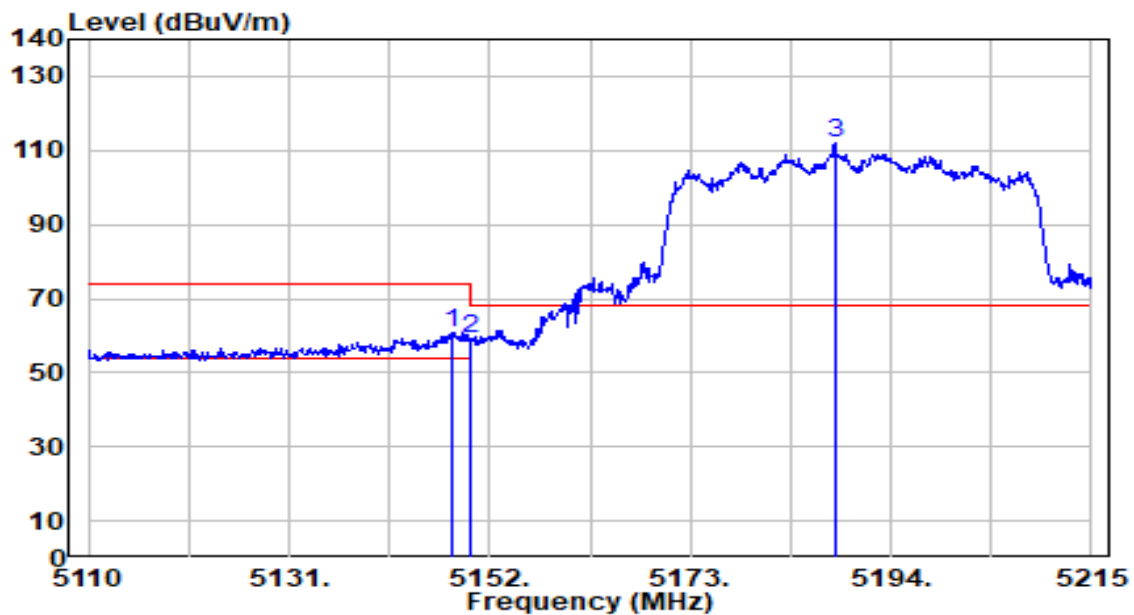


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.115	59.04	1.82	60.86	-13.14	74.00	143	343	Peak
2		5150.000	57.10	1.82	58.92	-15.08	74.00	143	343	Peak
3		5188.120	109.99	1.88	111.87	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

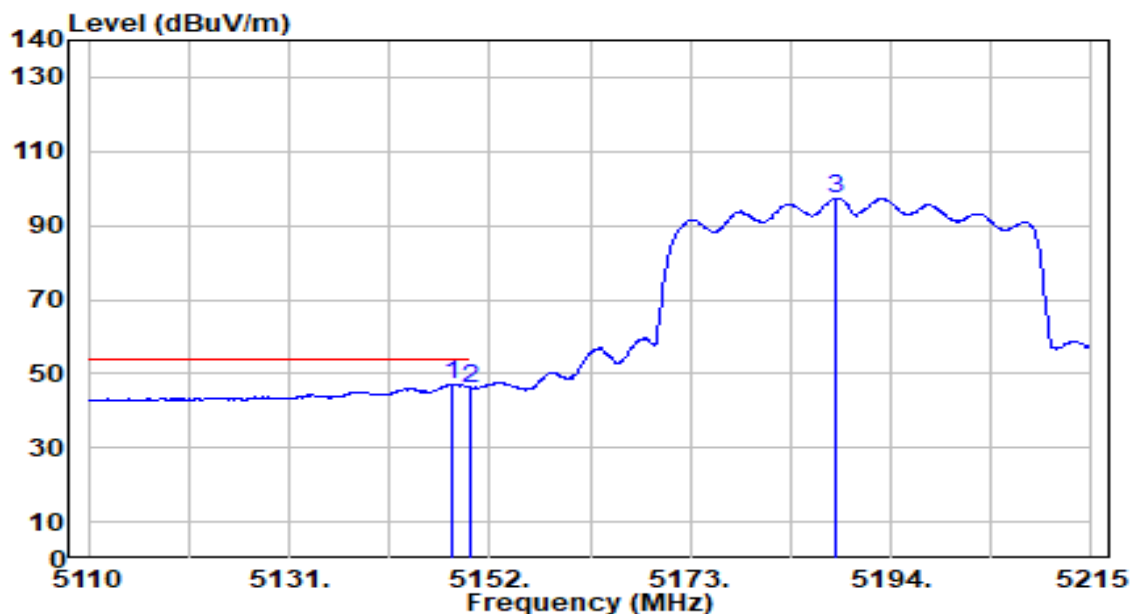


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.115	45.32	1.82	47.14	-6.86	54.00	143	343	Average
2		5150.000	44.38	1.82	46.20	-7.80	54.00	143	343	Average
3		5188.330	95.56	1.88	97.44	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

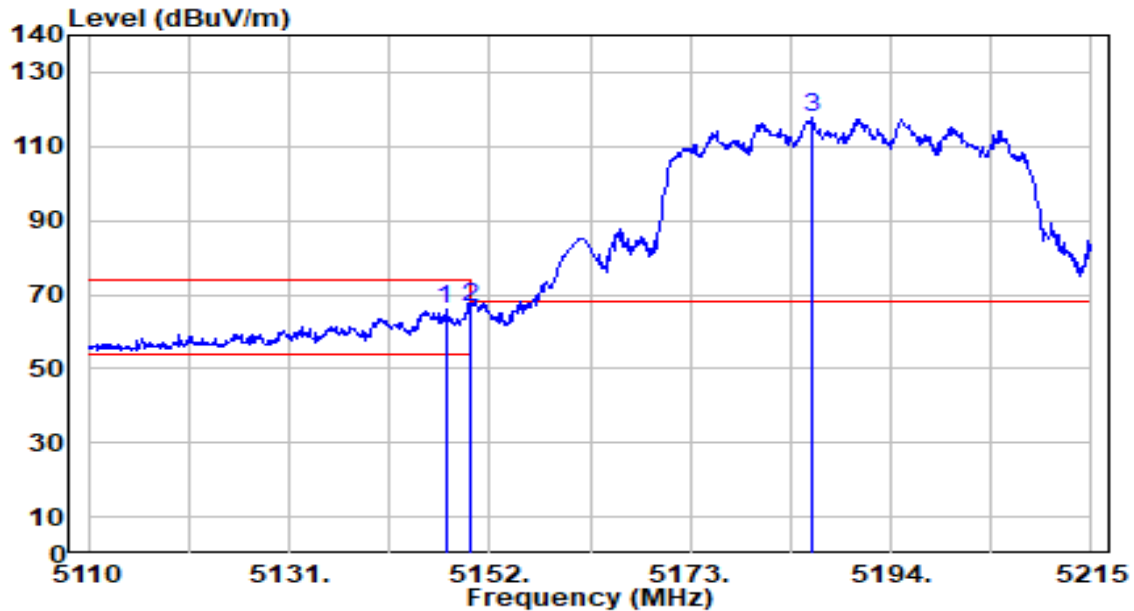


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5147.380	64.24	1.81	66.06	-7.94	74.00	195	159	Peak
2	*	5150.000	64.94	1.82	66.76	-7.24	74.00	195	159	Peak
3		5185.810	115.91	1.88	117.79	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

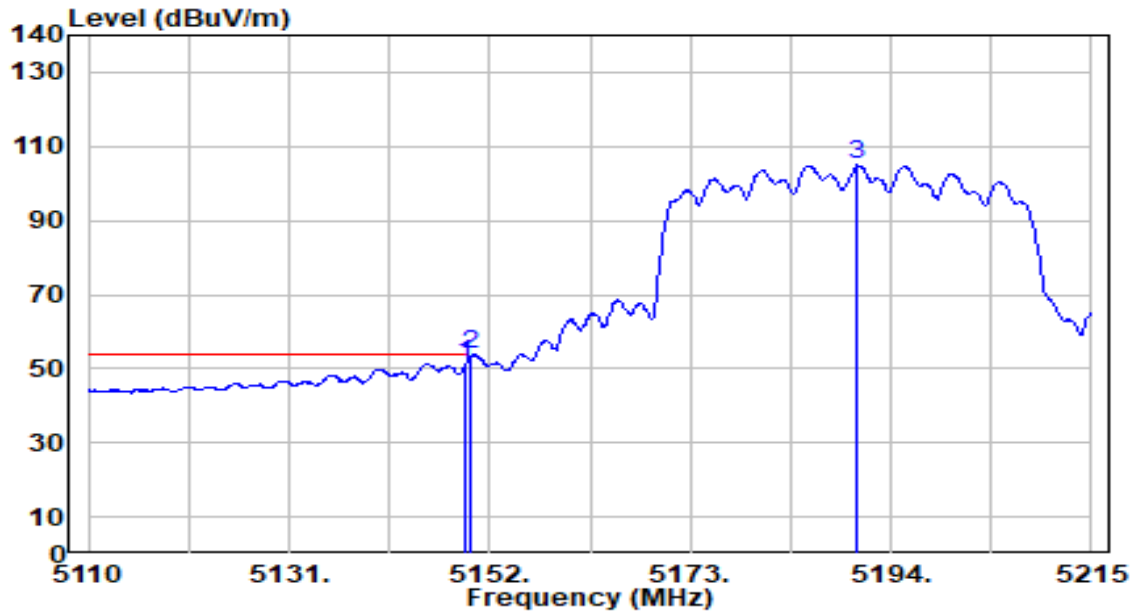


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.480	49.68	1.82	51.49	-2.51	54.00	195	159	Average
2	*	5150.000	51.89	1.82	53.71	-0.29	54.00	195	159	Average
3		5190.535	103.05	1.89	104.93	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

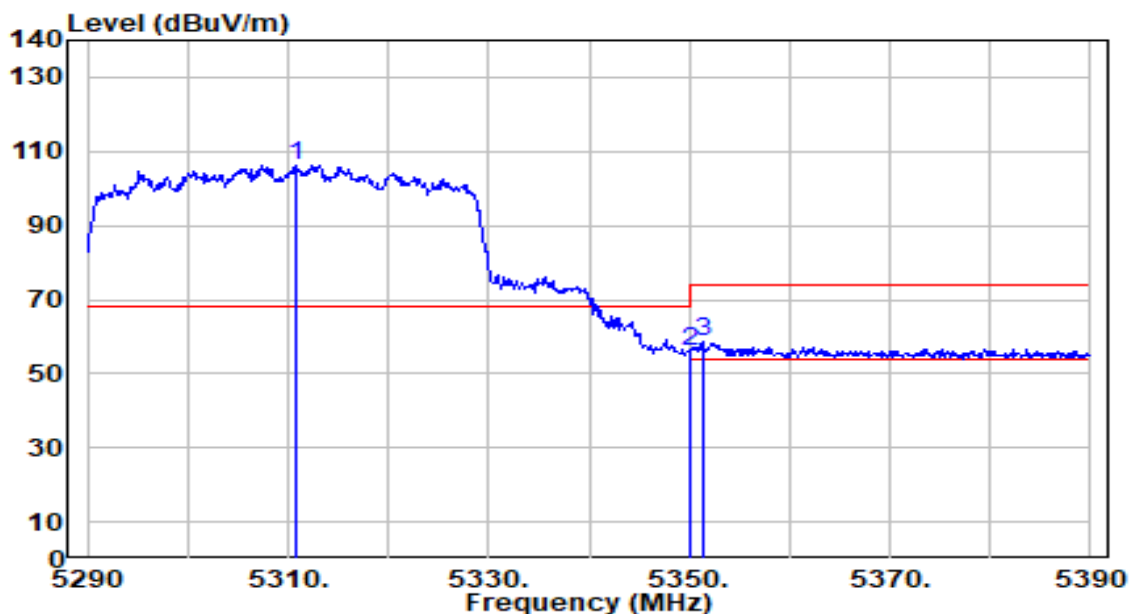


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5310.900	104.35	1.74	106.09	N/A	N/A	190	277	Peak
2	5350.000	54.48	1.69	56.17	-17.83	74.00	190	277	Peak
3	* 5351.300	56.82	1.69	58.51	-15.49	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

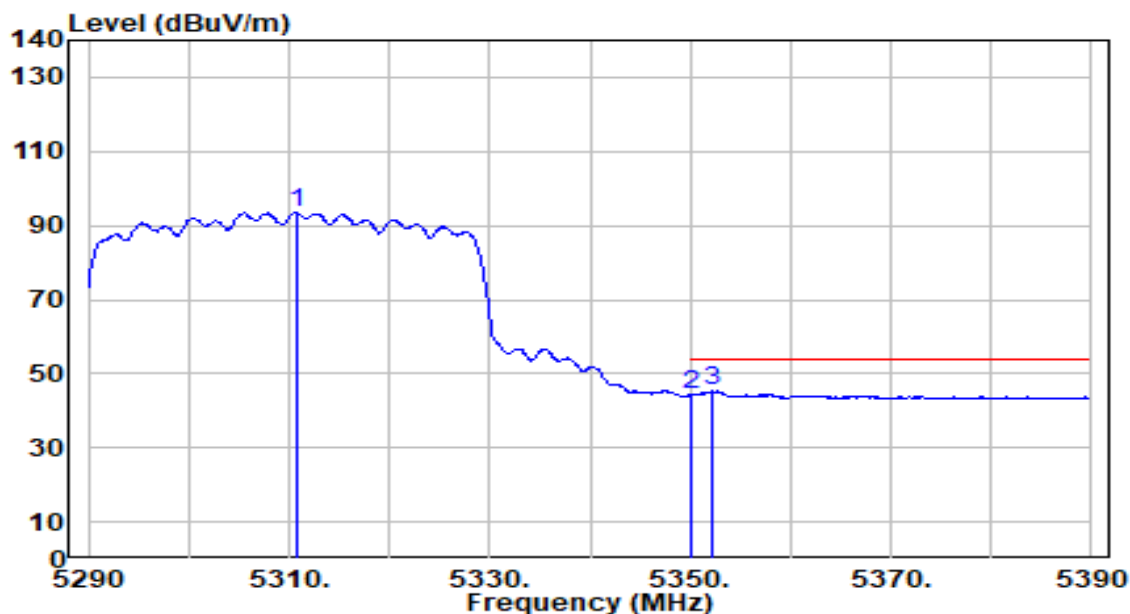


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5310.800	91.90	1.74	93.65	N/A	N/A	190	277	Average
2	5350.000	42.74	1.69	44.43	-9.57	54.00	190	277	Average
3	* 5352.200	43.51	1.69	45.20	-8.80	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

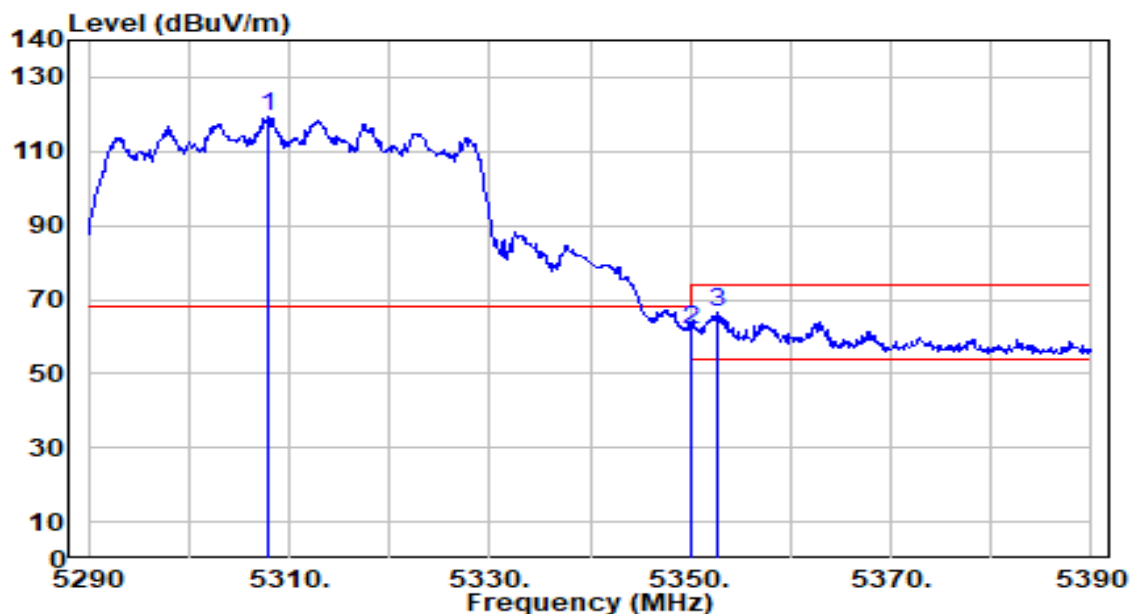


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.900	117.48	1.75	119.23	N/A	N/A	192	247	Peak
2	5350.000	60.06	1.69	61.75	-12.25	74.00	192	247	Peak
3	* 5352.800	64.64	1.69	66.33	-7.67	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

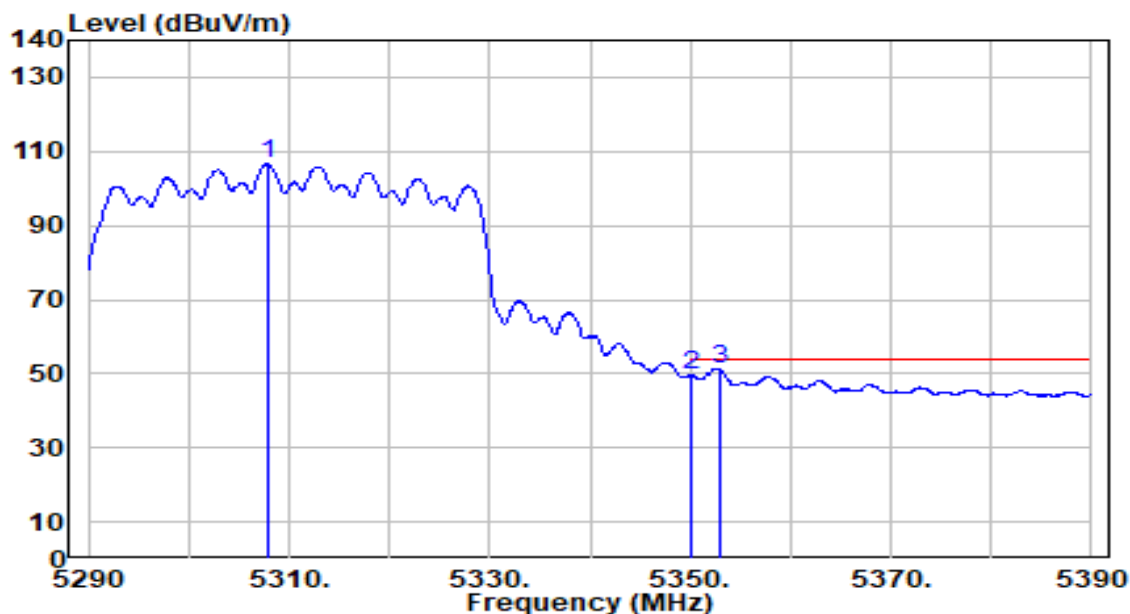


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.900	104.78	1.75	106.53	N/A	N/A	192	247	Average
2	5350.000	48.04	1.69	49.73	-4.27	54.00	192	247	Average
3	* 5353.000	49.56	1.69	51.25	-2.75	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

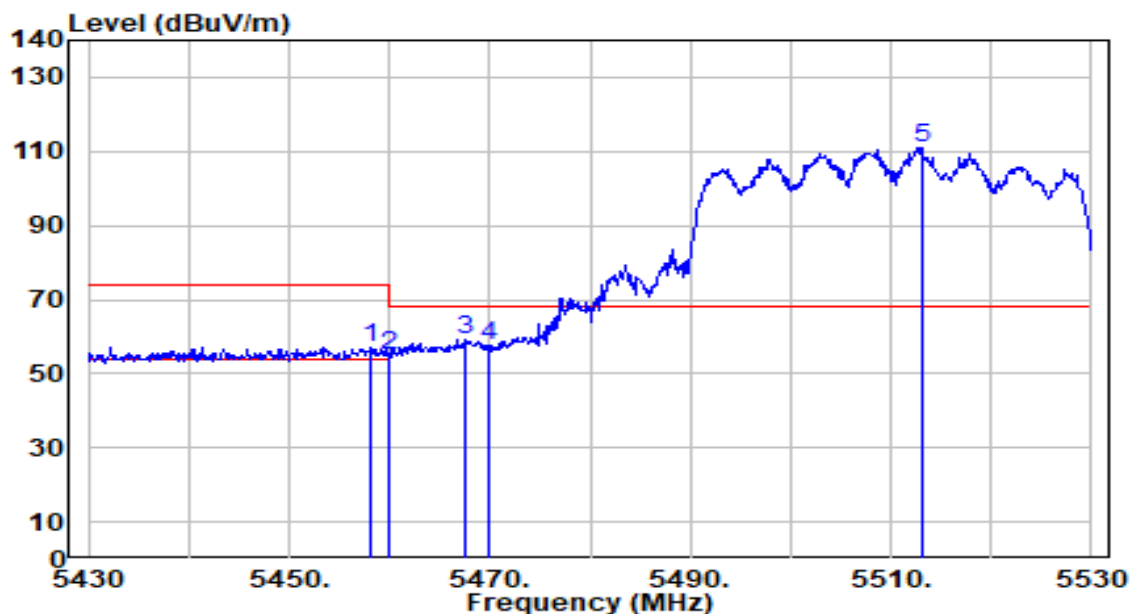


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.200	55.08	1.87	56.94	-17.06	74.00	213	305	Peak
2	5460.000	52.81	1.87	54.68	-19.32	74.00	213	305	Peak
3	* 5467.600	57.45	1.91	59.35	-8.85	68.20	213	305	Peak
4	5470.000	55.90	1.92	57.82	-10.38	68.20	213	305	Peak
5	5513.100	109.01	2.11	111.11	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

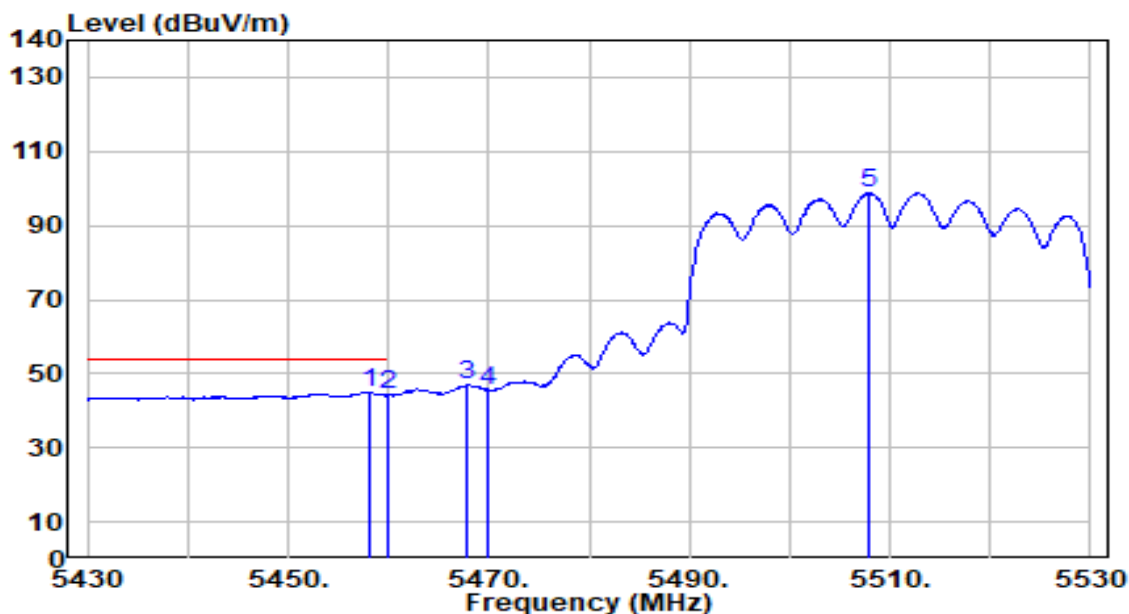


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.200	43.28	1.87	45.15	-8.85	54.00	213	305	Average
2		5460.000	42.27	1.87	44.14	-9.86	54.00	213	305	Average
3		5467.700	45.12	1.91	47.02	N/A	N/A	213	305	Average
4		5470.000	43.71	1.92	45.63	N/A	N/A	213	305	Average
5		5508.000	96.61	2.08	98.69	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

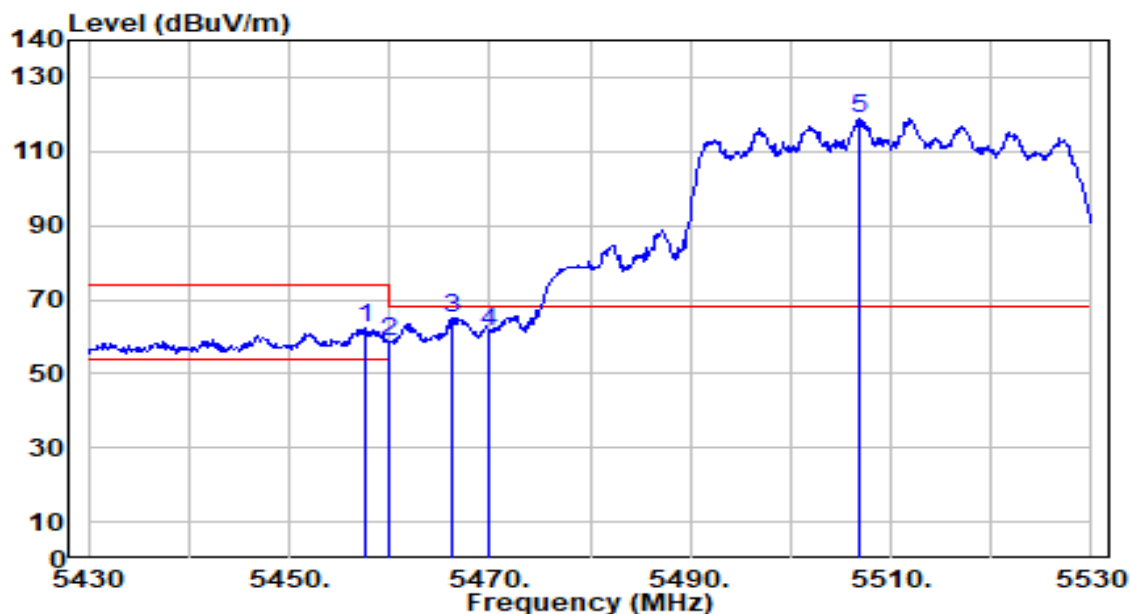


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.500	60.38	1.86	62.24	-11.76	74.00	270	277	Peak
2	5460.000	56.88	1.87	58.75	-15.25	74.00	270	277	Peak
3	* 5466.300	63.28	1.90	65.18	-3.02	68.20	270	277	Peak
4	5470.000	59.60	1.92	61.51	-6.69	68.20	270	277	Peak
5	5506.900	116.81	2.07	118.89	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

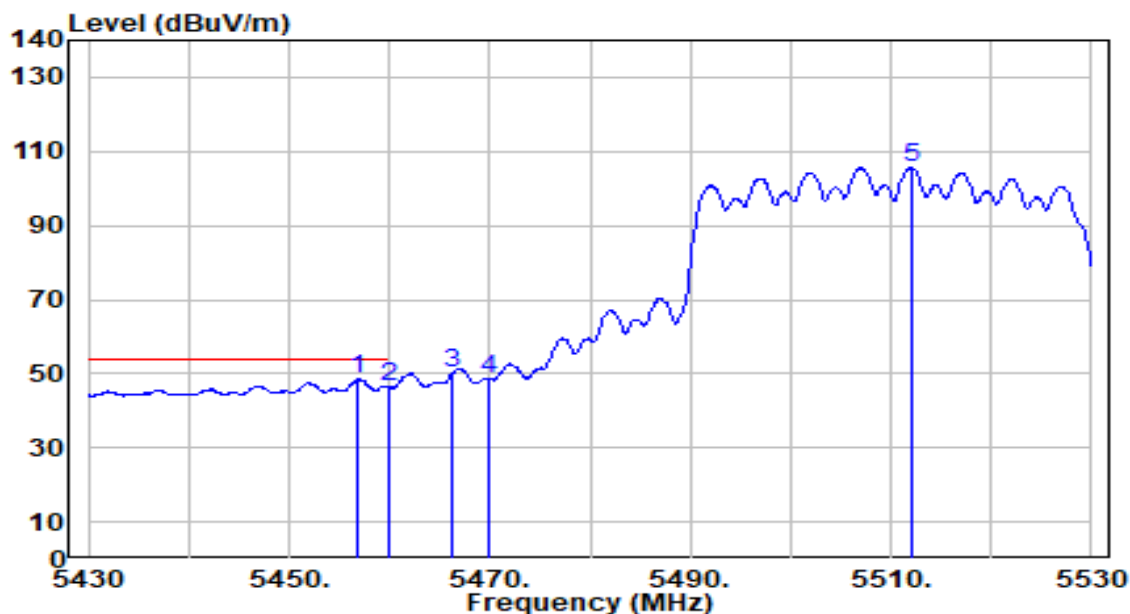


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.900	46.82	1.86	48.68	-5.32	54.00	270	277	Average
2		5460.000	44.42	1.87	46.29	-7.71	54.00	270	277	Average
3		5466.300	48.19	1.90	50.09	N/A	N/A	270	277	Average
4		5470.000	46.76	1.92	48.68	N/A	N/A	270	277	Average
5		5512.000	103.48	2.10	105.58	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

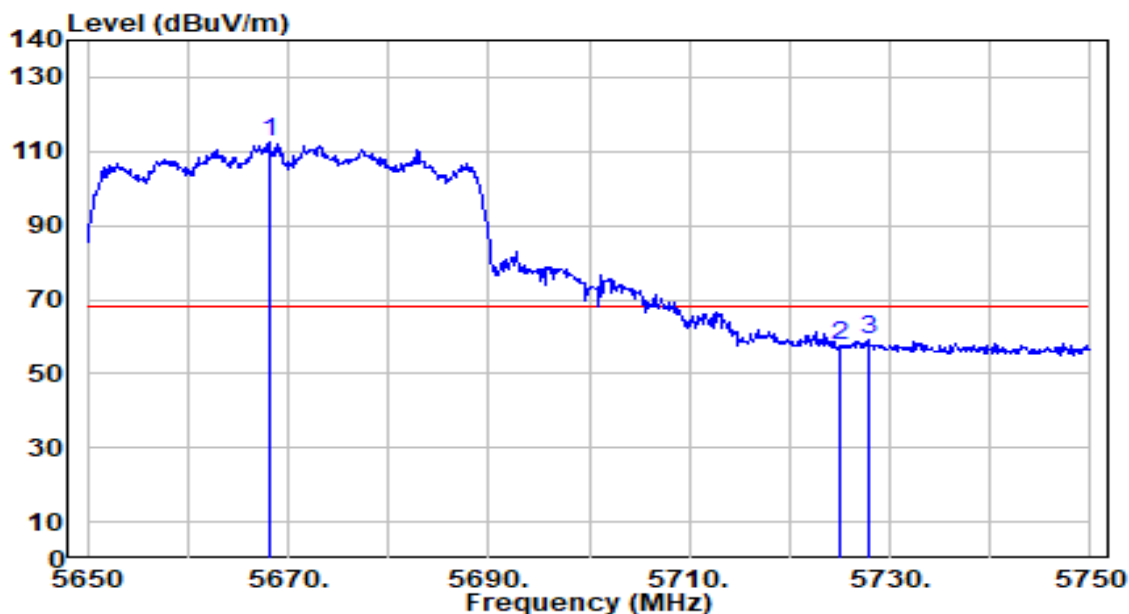


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.100	109.58	2.86	112.44	N/A	N/A	188	304	Peak
2	5725.000	54.50	3.14	57.64	-10.56	68.20	188	304	Peak
3	* 5727.900	55.82	3.15	58.97	-9.23	68.20	188	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

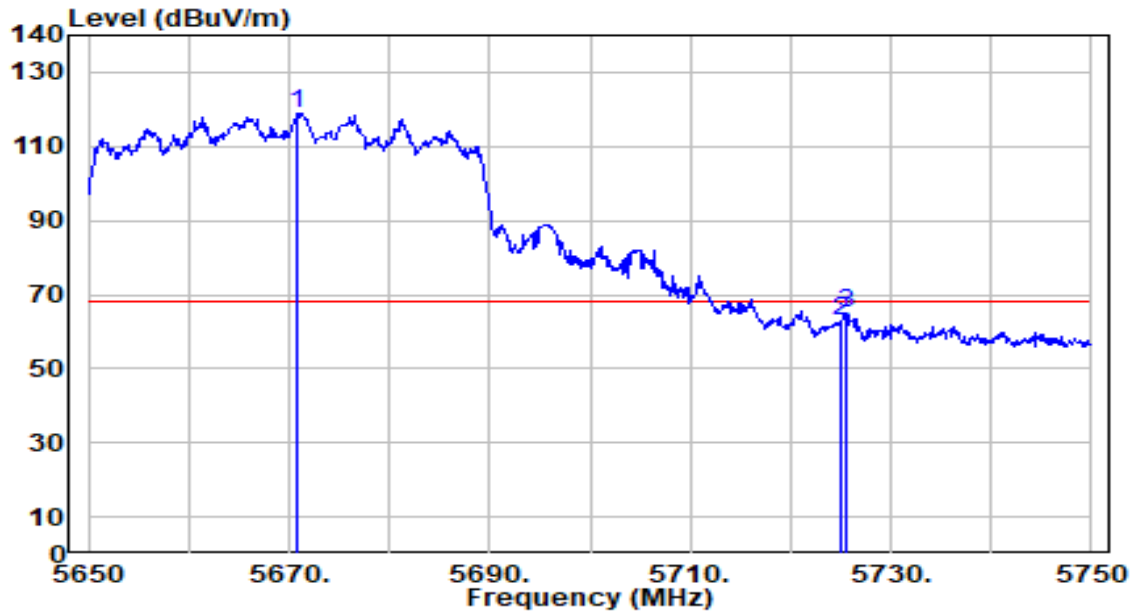


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5670.800	116.09	2.88	118.97	N/A	N/A	157	265	Peak
2	5725.000	59.78	3.14	62.92	-5.28	68.20	157	265	Peak
3	* 5725.500	61.58	3.14	64.72	-3.48	68.20	157	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

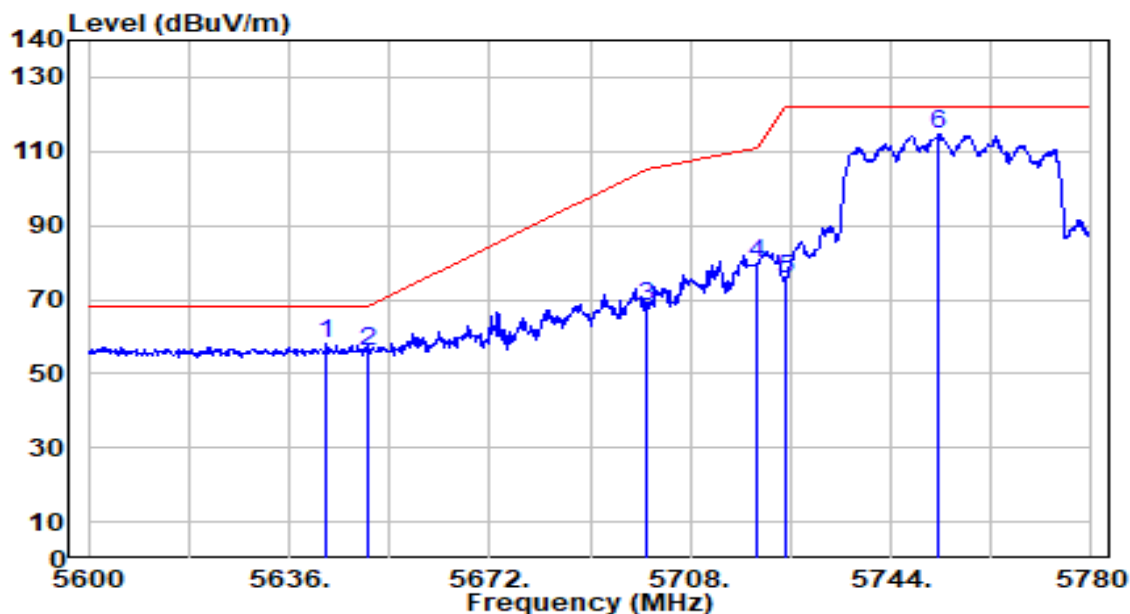


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.840	55.55	2.74	58.29	-9.91	68.20	194	304	Peak
2		5650.000	53.48	2.78	56.26	-11.94	68.20	194	304	Peak
3		5700.000	64.91	3.02	67.93	-37.27	105.20	194	304	Peak
4		5720.000	76.69	3.12	79.80	-31.00	110.80	194	304	Peak
5		5725.000	72.63	3.14	75.77	-46.43	122.20	194	304	Peak
6		5752.640	111.32	3.28	114.60	N/A	N/A	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

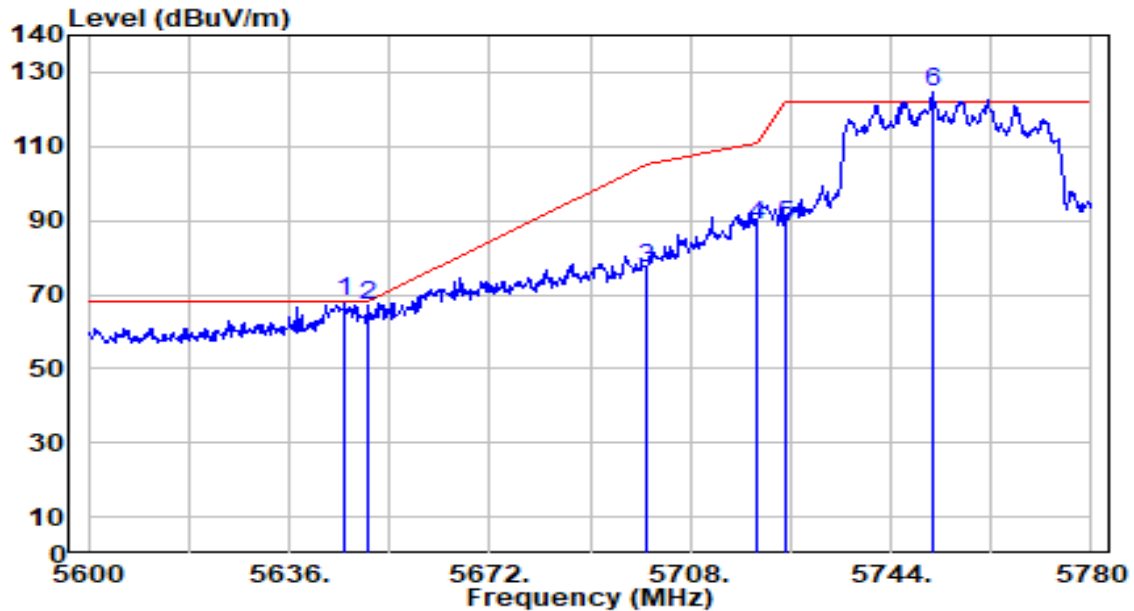


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.900	65.18	2.76	67.94	-0.26	68.20	167	270	Peak
2		5650.000	64.22	2.78	67.00	-1.20	68.20	167	270	Peak
3		5700.000	74.27	3.02	77.29	-27.91	105.20	167	270	Peak
4		5720.000	85.53	3.12	88.65	-22.15	110.80	167	270	Peak
5		5725.000	85.69	3.14	88.83	-33.37	122.20	167	270	Peak
6		5751.380	121.26	3.27	124.53	N/A	N/A	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

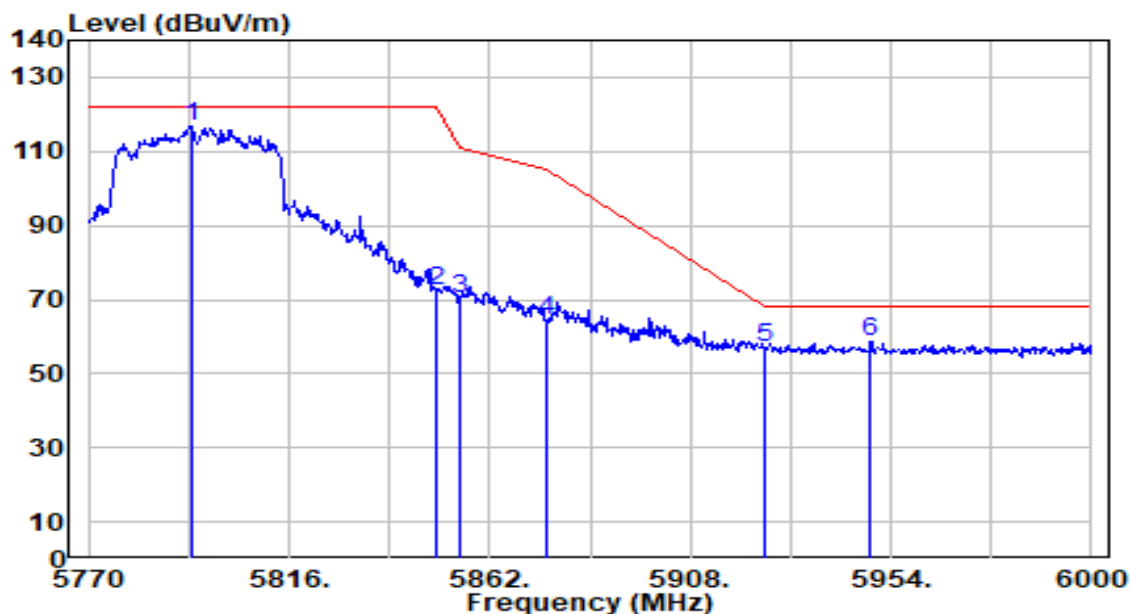


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.460	113.41	3.48	116.89	N/A	N/A	182	305	Peak
2	5850.000	68.80	3.51	72.30	-49.90	122.20	182	305	Peak
3	5855.000	66.88	3.51	70.39	-40.41	110.80	182	305	Peak
4	5875.000	60.69	3.50	64.19	-41.01	105.20	182	305	Peak
5	5925.000	53.41	3.51	56.92	-11.28	68.20	182	305	Peak
6	* 5949.400	55.10	3.52	58.62	-9.58	68.20	182	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

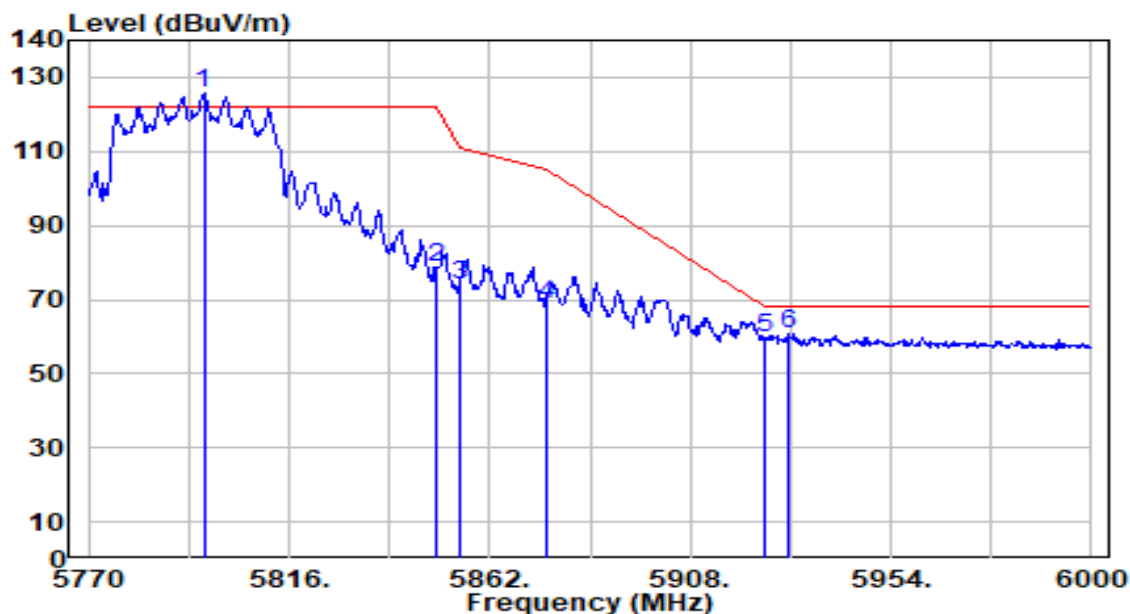


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5796.450	122.07	3.50	125.57	N/A	N/A	184	273	Peak
2	5850.000	75.25	3.51	78.76	-43.44	122.20	184	273	Peak
3	5855.000	70.51	3.51	74.02	-36.78	110.80	184	273	Peak
4	5875.000	65.00	3.50	68.50	-36.70	105.20	184	273	Peak
5	5925.000	55.95	3.51	59.46	-8.74	68.20	184	273	Peak
6	* 5930.770	57.46	3.51	60.97	-7.23	68.20	184	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

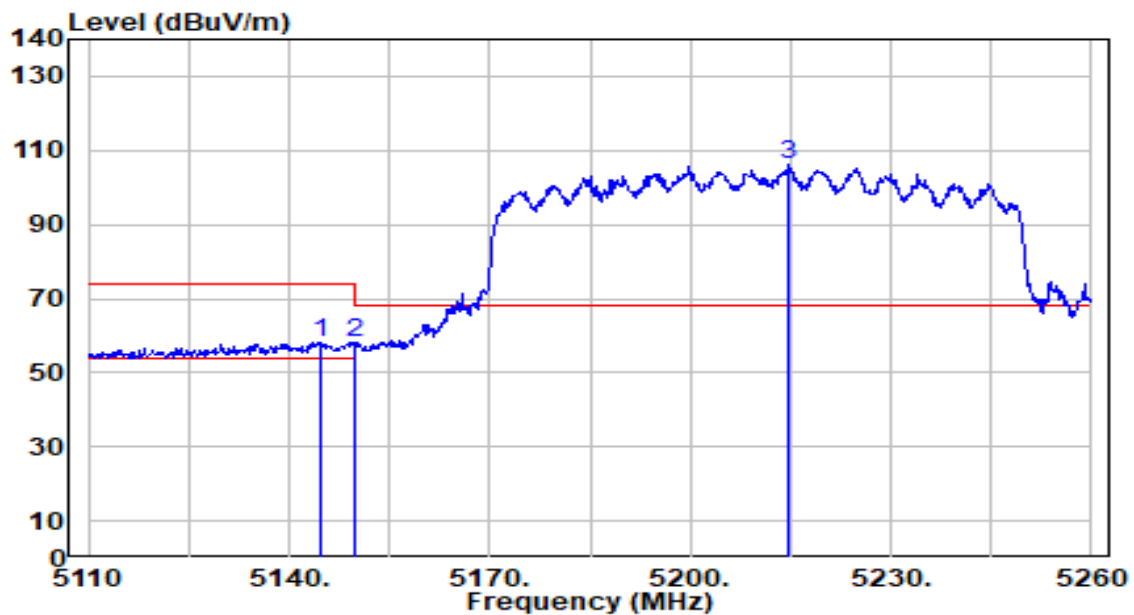


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.650	56.25	1.81	58.06	-15.94	74.00	143	343	Peak
2		5150.000	56.12	1.82	57.93	-16.07	74.00	143	343	Peak
3		5214.700	104.11	1.88	105.99	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

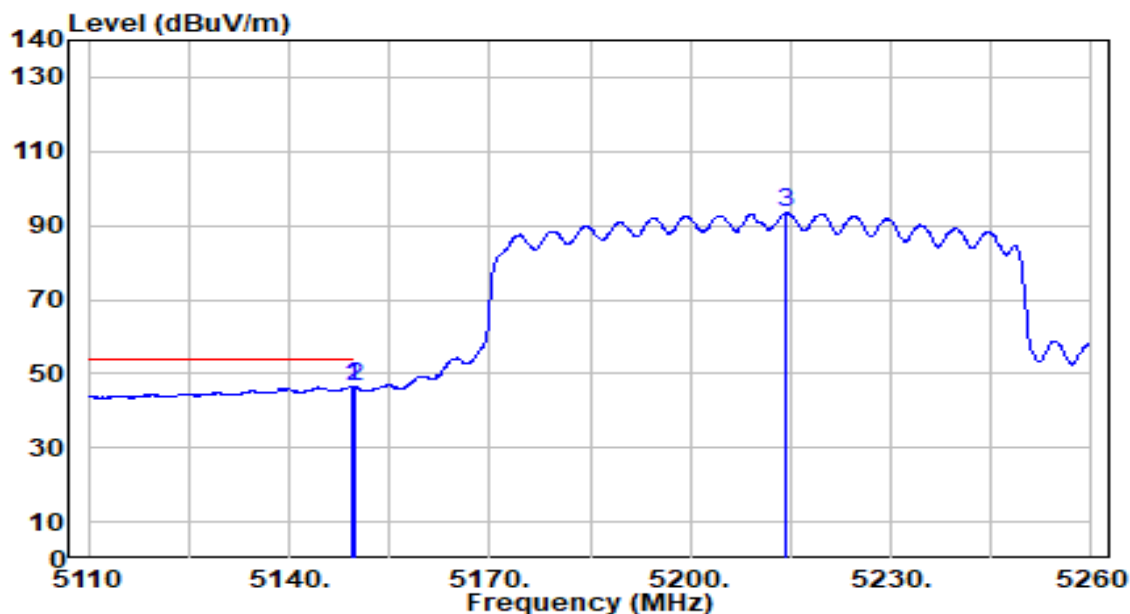


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.300	44.66	1.82	46.48	-7.52	54.00	143	343	Average
2		5150.000	44.46	1.82	46.28	-7.72	54.00	143	343	Average
3		5214.250	91.54	1.88	93.42	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

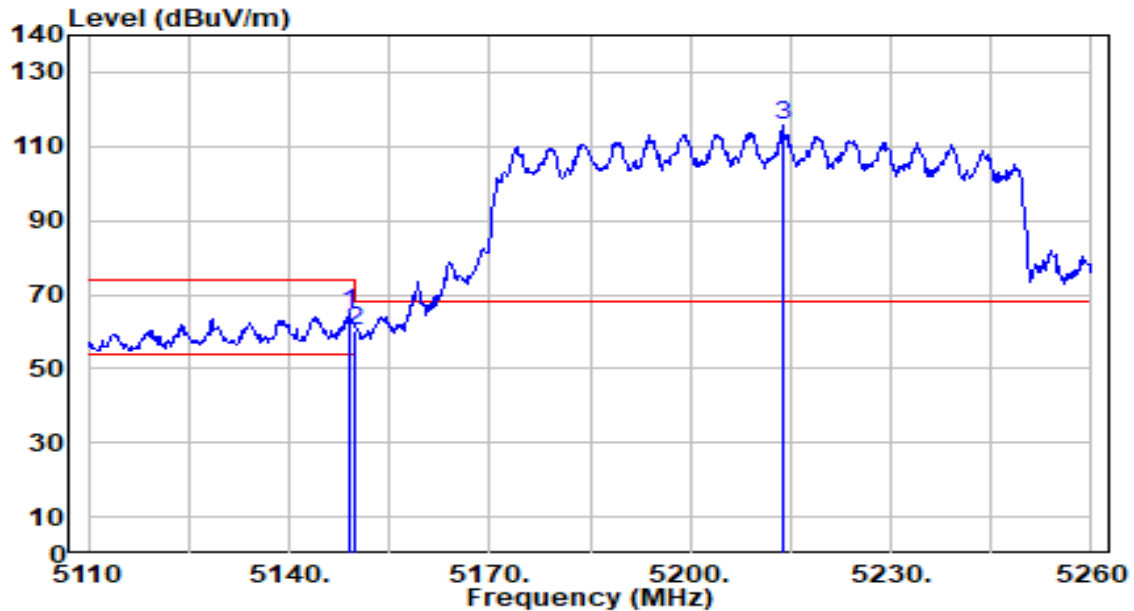


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.000	63.12	1.82	64.93	-9.07	74.00	195	159	Peak
2		5150.000	58.49	1.82	60.31	-13.69	74.00	195	159	Peak
3		5213.800	113.99	1.88	115.87	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

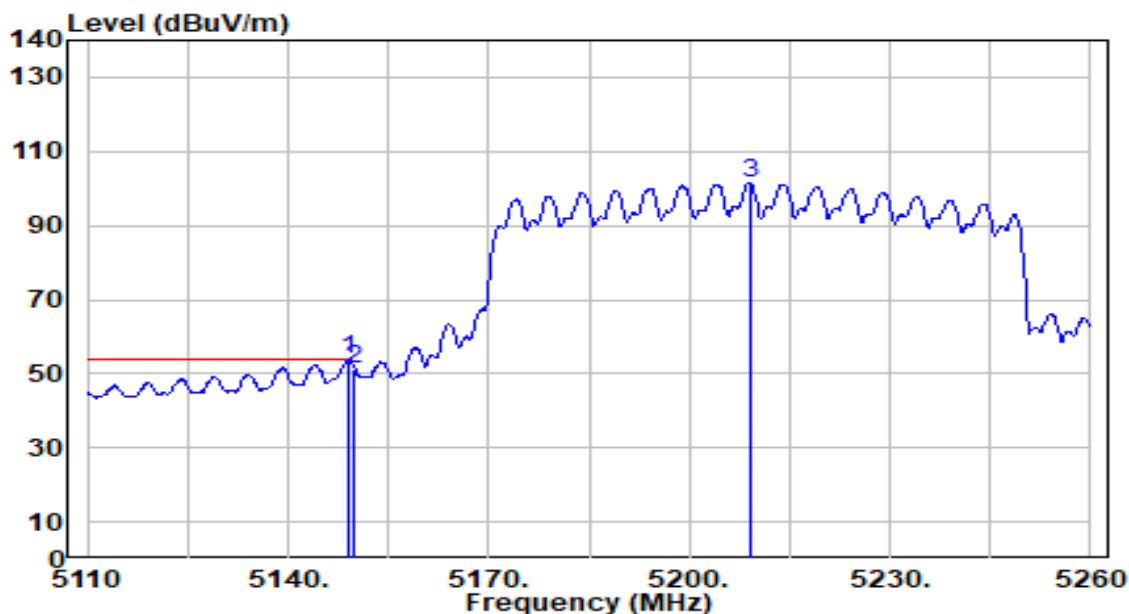


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.000	51.90	1.82	53.72	-0.28	54.00	195	159	Average
2		5150.000	49.22	1.82	51.04	-2.96	54.00	195	159	Average
3		5209.000	99.60	1.89	101.49	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

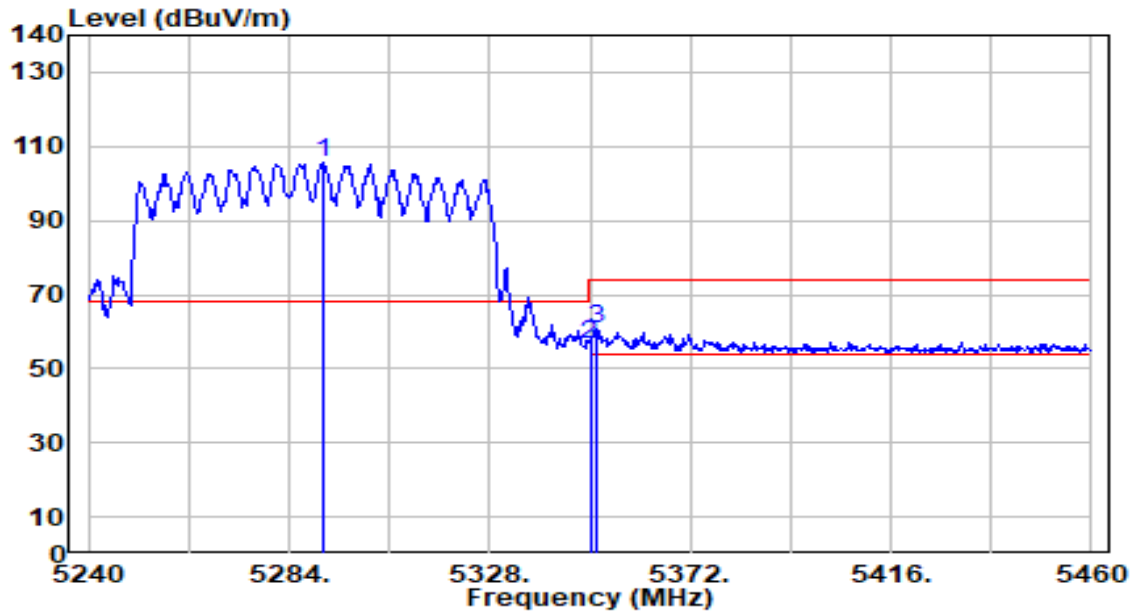


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.700	103.93	1.77	105.70	N/A	N/A	190	277	Peak
2	5350.000	55.03	1.69	56.72	-17.28	74.00	190	277	Peak
3	* 5351.540	58.87	1.69	60.56	-13.44	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

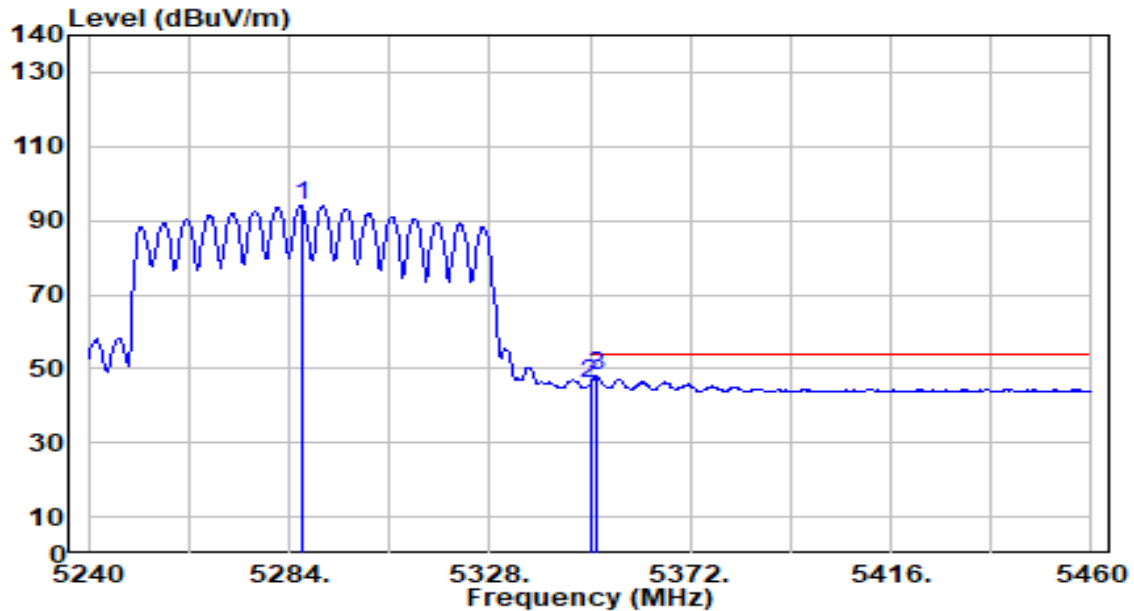


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.640	92.14	1.78	93.92	N/A	N/A	190	277	Average
2	5350.000	44.22	1.69	45.91	-8.09	54.00	190	277	Average
3	* 5351.320	46.31	1.69	48.00	-6.00	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

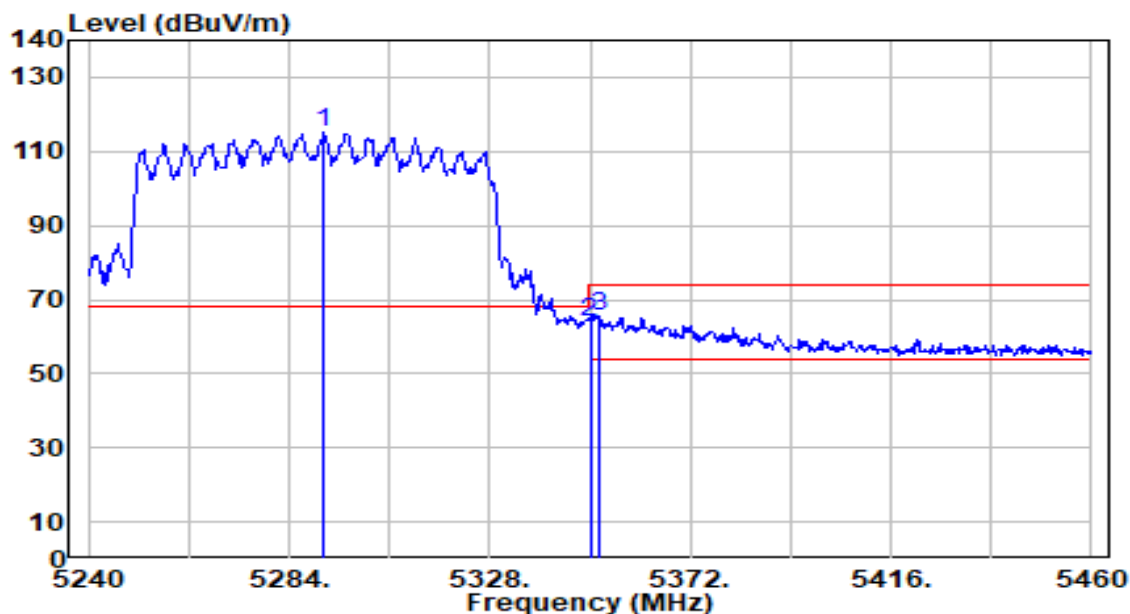


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.700	113.30	1.77	115.07	N/A	N/A	192	247	Peak
2	5350.000	62.42	1.69	64.11	-9.89	74.00	192	247	Peak
3	* 5351.760	63.89	1.69	65.58	-8.42	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

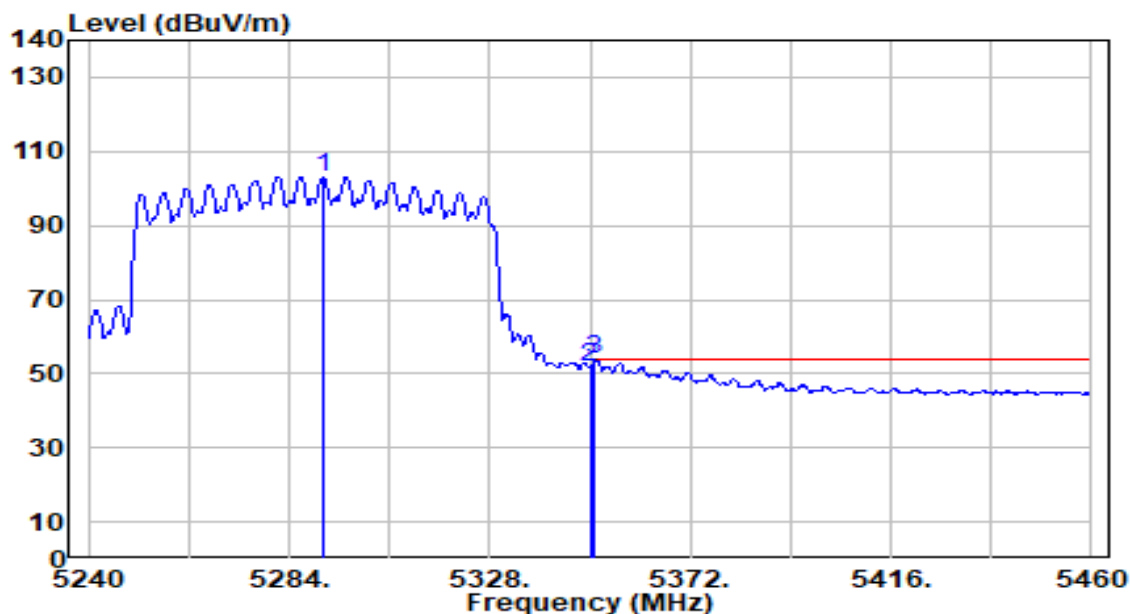


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5291.480	101.34	1.77	103.11	N/A	N/A	192	247	Average
2	5350.000	50.19	1.69	51.88	-2.12	54.00	192	247	Average
3	* 5351.100	52.06	1.69	53.75	-0.25	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

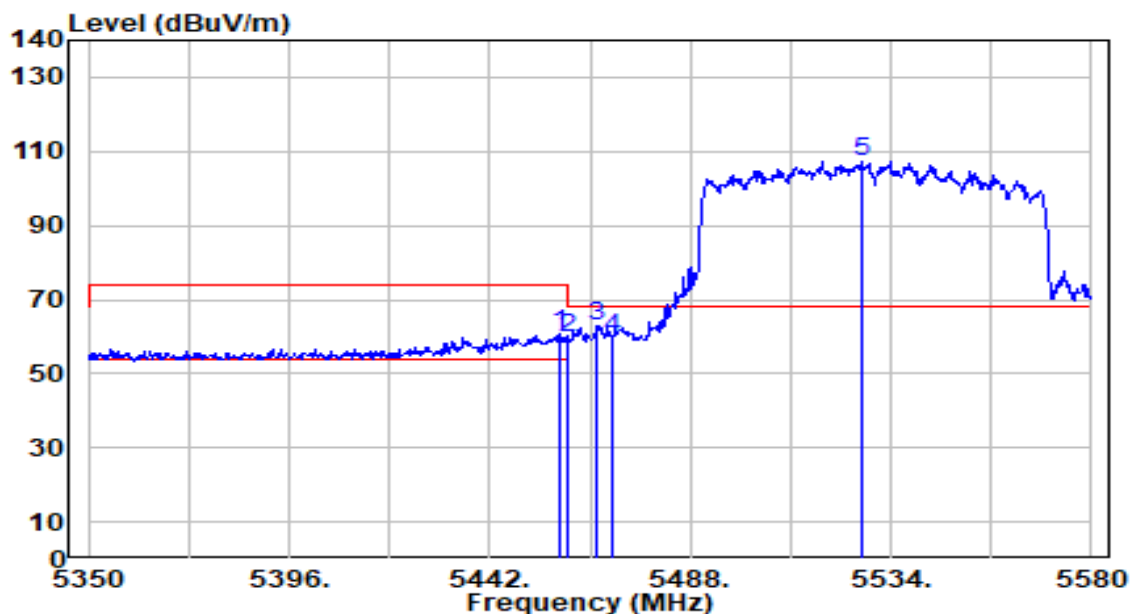


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	59.15	1.87	61.01	-12.99	74.00	213	305	Peak
2	5460.000	58.07	1.87	59.94	-14.06	74.00	213	305	Peak
3	* 5466.610	61.07	1.90	62.97	-5.23	68.20	213	305	Peak
4	5470.000	57.94	1.92	59.85	-8.35	68.20	213	305	Peak
5	5527.100	105.09	2.17	107.26	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

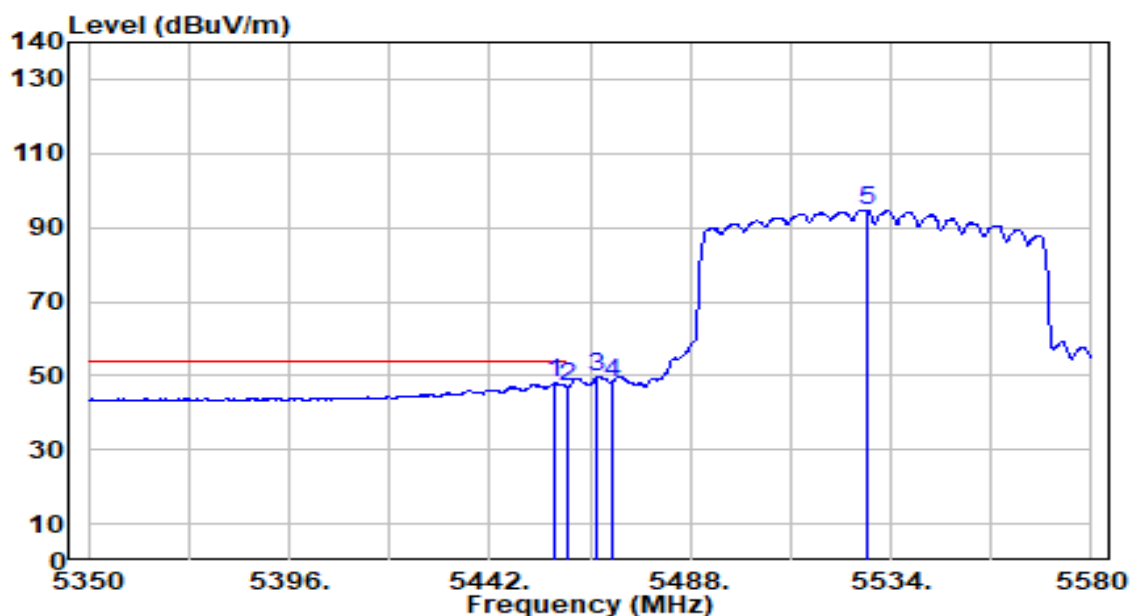


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.950	46.00	1.86	47.86	-6.14	54.00	213	305	Average
2		5460.000	45.03	1.87	46.91	-7.09	54.00	213	305	Average
3		5466.610	47.62	1.90	49.53	N/A	N/A	213	305	Average
4		5470.000	46.37	1.92	48.28	N/A	N/A	213	305	Average
5		5528.710	92.61	2.18	94.80	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

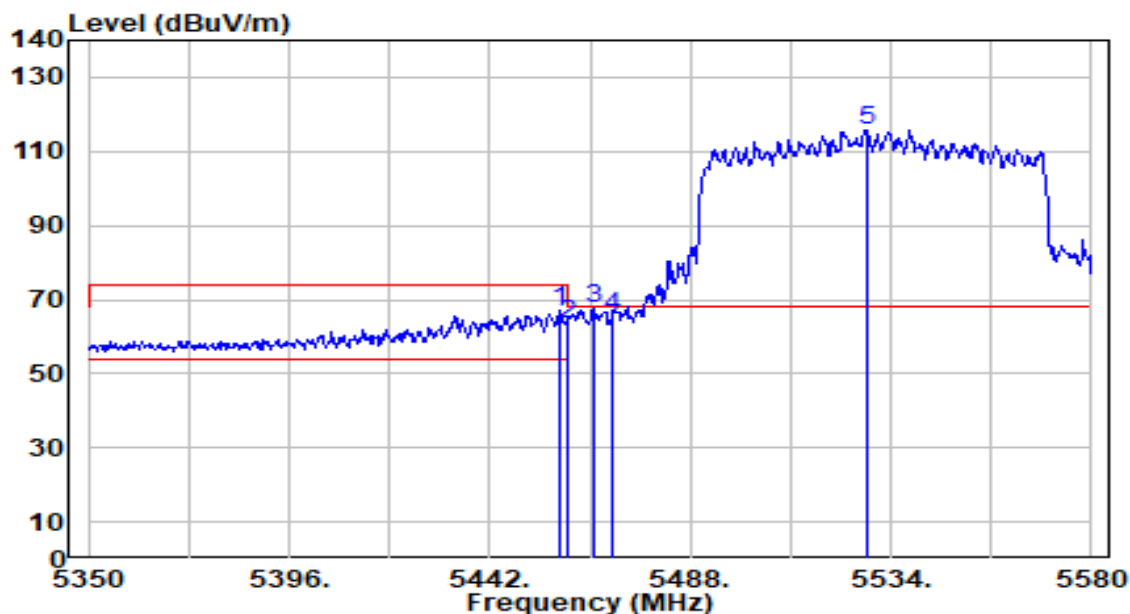


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	65.15	1.87	67.01	-6.99	74.00	270	277	Peak
2	5460.000	61.76	1.87	63.63	-10.37	74.00	270	277	Peak
3	* 5465.690	65.69	1.90	67.59	-0.61	68.20	270	277	Peak
4	5470.000	63.68	1.92	65.59	-2.61	68.20	270	277	Peak
5	5528.480	113.76	2.18	115.94	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

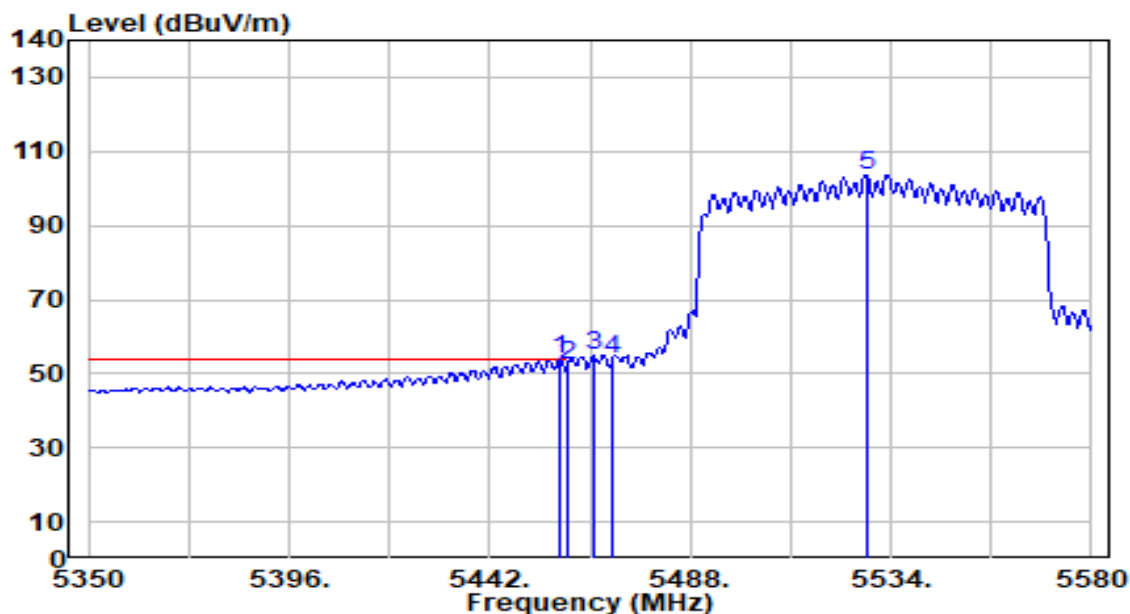


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.100	51.80	1.87	53.66	-0.34	54.00	270	277	Average
2		5460.000	50.64	1.87	52.51	-1.49	54.00	270	277	Average
3		5465.690	52.99	1.90	54.89	N/A	N/A	270	277	Average
4		5470.000	51.77	1.92	53.68	N/A	N/A	270	277	Average
5		5528.480	101.53	2.18	103.72	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

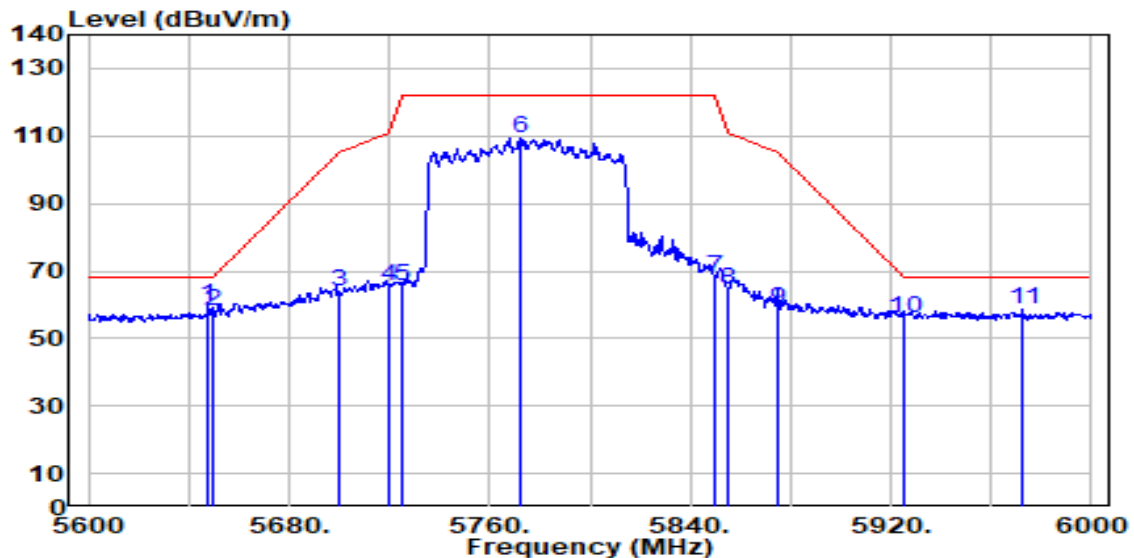


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.000	56.98	2.77	59.75	-8.45	68.20	194	304	Peak
2		5650.000	55.15	2.78	57.92	-10.28	68.20	194	304	Peak
3		5700.000	60.79	3.02	63.81	-41.39	105.20	194	304	Peak
4		5720.000	62.61	3.12	65.72	-45.08	110.80	194	304	Peak
5		5725.000	62.59	3.14	65.73	-56.47	122.20	194	304	Peak
6		5772.000	106.23	3.37	109.60	N/A	N/A	194	304	Peak
7		5850.000	64.71	3.51	68.22	-53.98	122.20	194	304	Peak
8		5855.000	60.76	3.51	64.27	-46.53	110.80	194	304	Peak
9		5875.000	55.20	3.50	58.70	-46.50	105.20	194	304	Peak
10		5925.000	52.58	3.51	56.09	-12.11	68.20	194	304	Peak
11		5972.800	55.06	3.53	58.59	-9.61	68.20	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

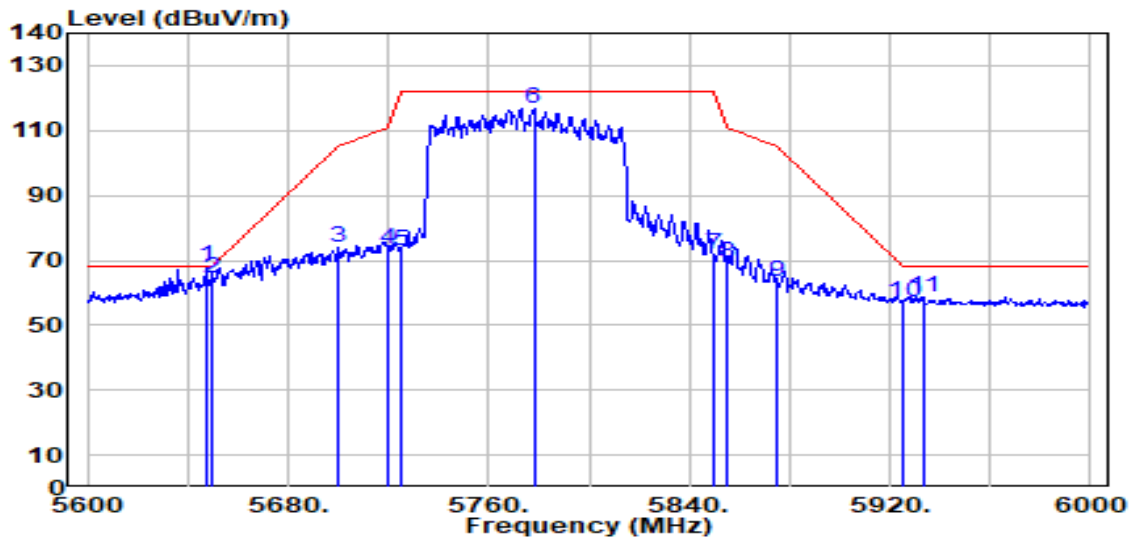


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.600	65.22	2.77	67.99	-0.21	68.20	167	270	Peak
2		5650.000	61.65	2.78	64.43	-3.77	68.20	167	270	Peak
3		5700.000	70.69	3.02	73.71	-31.49	105.20	167	270	Peak
4		5720.000	70.32	3.12	73.43	-37.37	110.80	167	270	Peak
5		5725.000	69.69	3.14	72.83	-49.37	122.20	167	270	Peak
6		5778.000	113.36	3.40	116.76	N/A	N/A	167	270	Peak
7		5850.000	68.15	3.51	71.66	-50.54	122.20	167	270	Peak
8		5855.000	65.51	3.51	69.02	-41.78	110.80	167	270	Peak
9		5875.000	59.97	3.50	63.47	-41.73	105.20	167	270	Peak
10		5925.000	53.74	3.51	57.25	-10.95	68.20	167	270	Peak
11		5933.200	55.29	3.51	58.81	-9.39	68.20	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

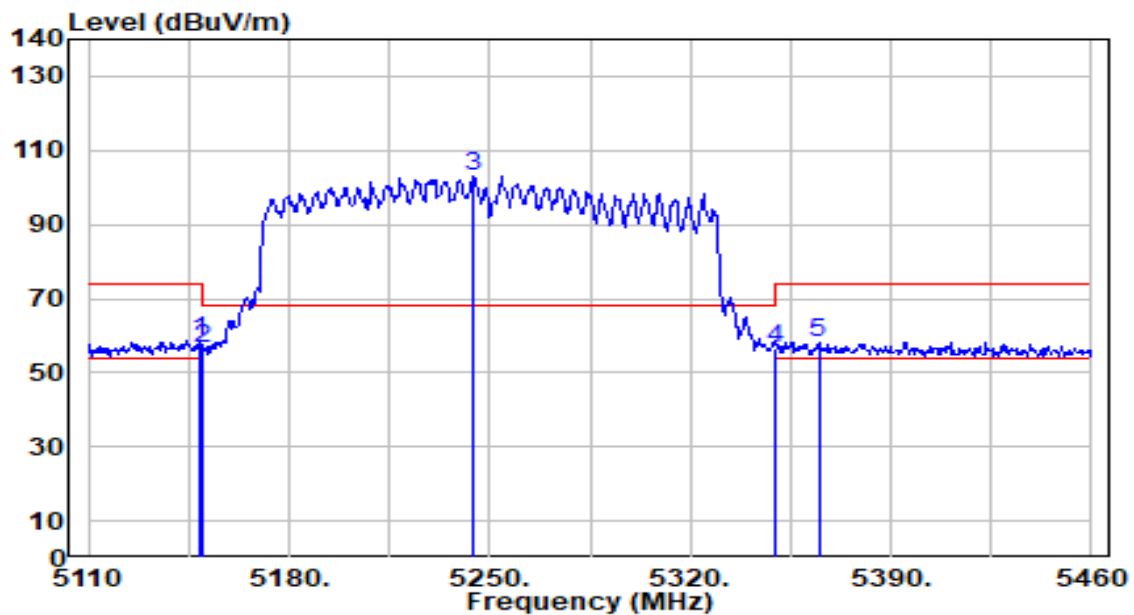


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.200	56.87	1.82	58.69	-15.31	74.00	143	343	Peak
2		5150.000	54.95	1.82	56.77	-17.23	74.00	143	343	Peak
3		5244.050	101.19	1.84	103.03	N/A	N/A	143	343	Peak
4		5350.000	54.74	1.69	56.43	-17.57	74.00	143	343	Peak
5		5364.800	56.63	1.67	58.30	-15.70	74.00	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

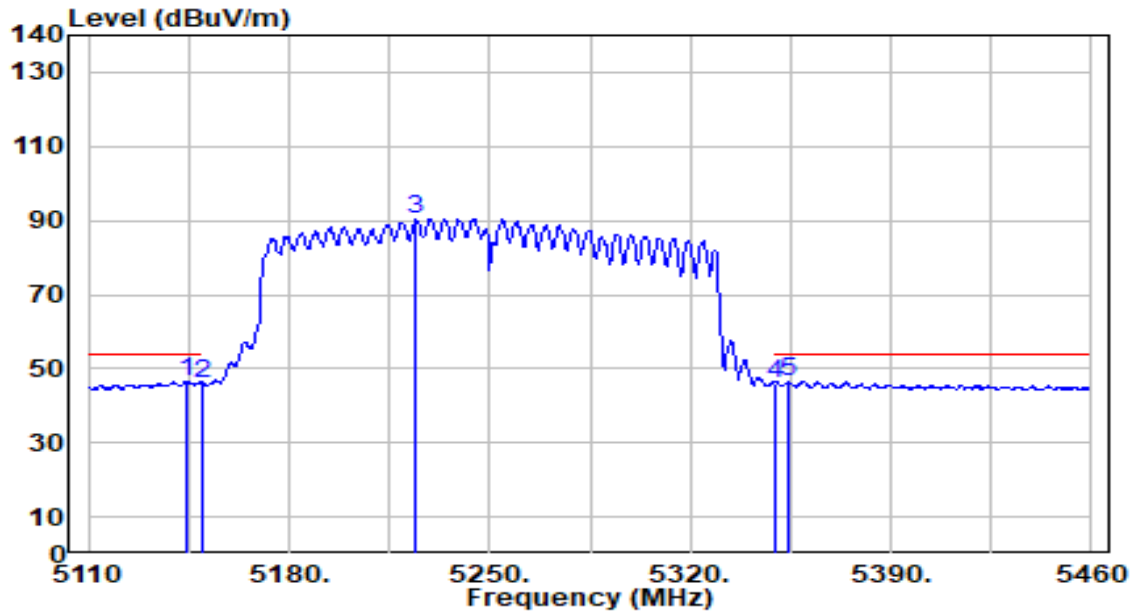


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.950	44.84	1.81	46.65	-7.35	54.00	143	343	Average
2		5150.000	44.19	1.82	46.01	-7.99	54.00	143	343	Average
3		5224.450	88.70	1.87	90.57	N/A	N/A	143	343	Average
4		5350.000	44.34	1.69	46.03	-7.97	54.00	143	343	Average
5		5354.300	44.84	1.69	46.52	-7.48	54.00	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

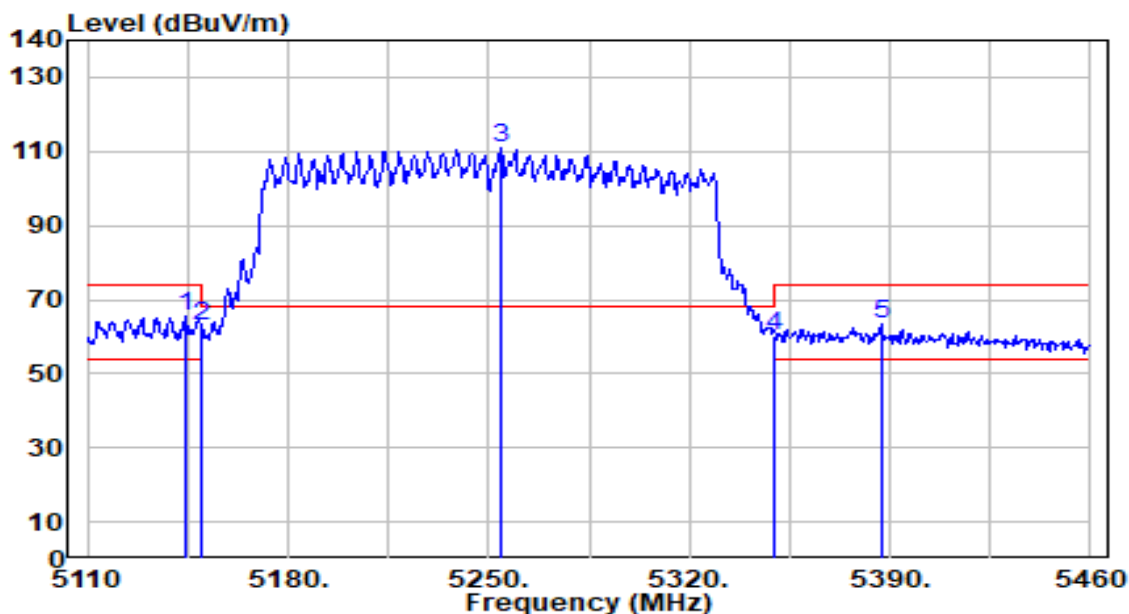


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.300	63.51	1.81	65.32	-8.68	74.00	195	159	Peak
2		5150.000	61.24	1.82	63.06	-10.94	74.00	195	159	Peak
3		5254.200	109.14	1.82	110.96	N/A	N/A	195	159	Peak
4		5350.000	58.71	1.69	60.40	-13.60	74.00	195	159	Peak
5		5386.850	62.01	1.64	63.65	-10.35	74.00	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

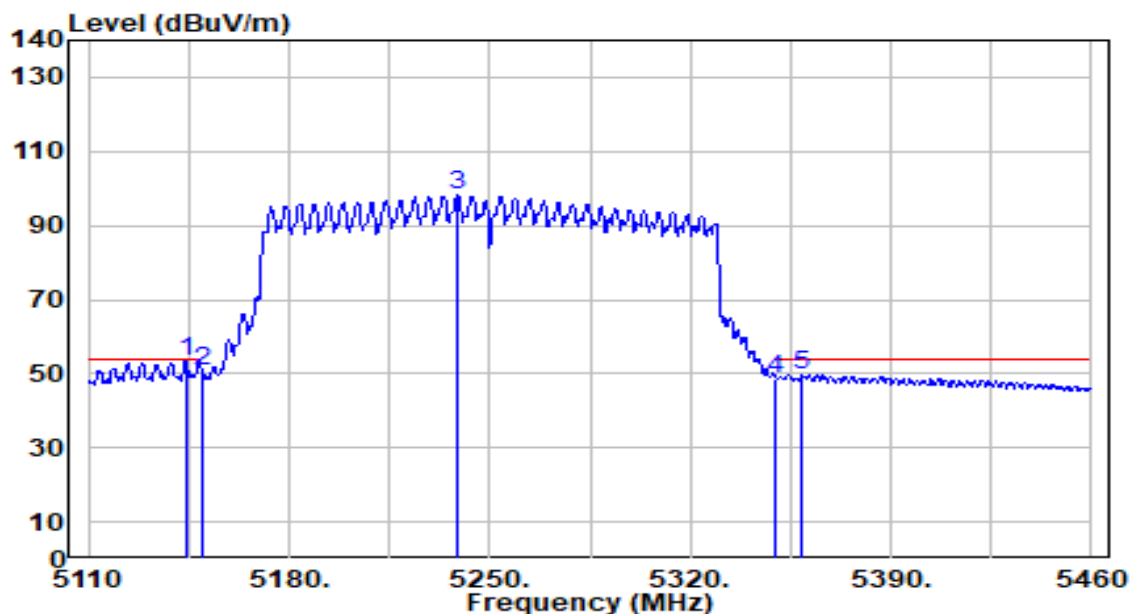


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.950	51.59	1.81	53.40	-0.60	54.00	195	159	Average
2		5150.000	48.78	1.82	50.60	-3.40	54.00	195	159	Average
3		5239.150	96.26	1.85	98.11	N/A	N/A	195	159	Average
4		5350.000	47.07	1.69	48.76	-5.24	54.00	195	159	Average
5		5359.200	48.17	1.68	49.85	-4.15	54.00	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

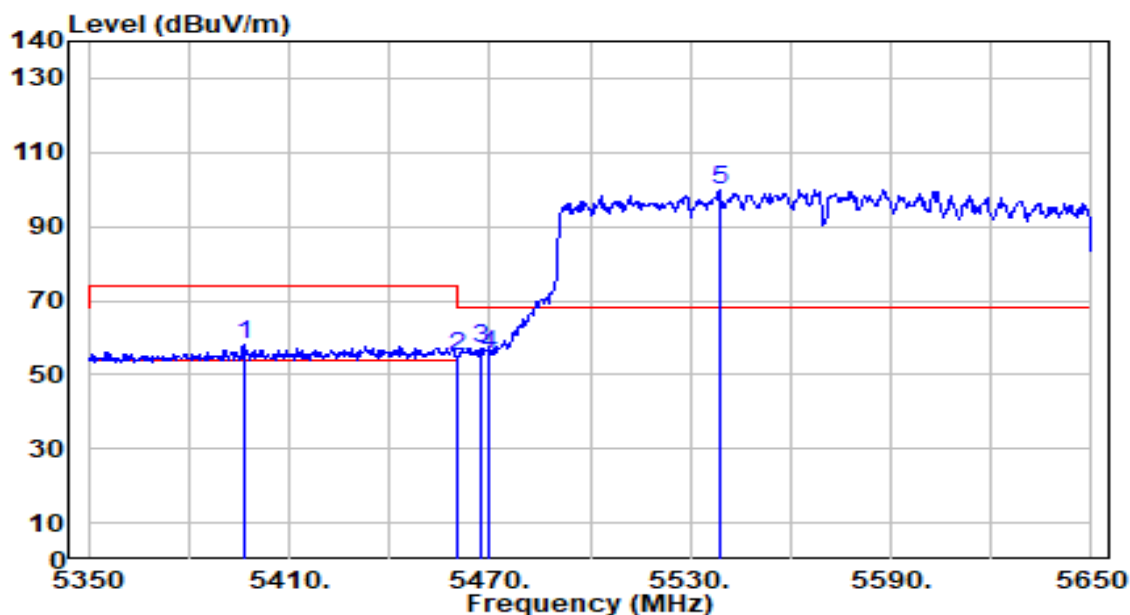


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5396.500	56.42	1.63	58.05	-15.95	74.00	213	305	Peak
2	5460.000	53.07	1.87	54.95	-19.05	74.00	213	305	Peak
3	* 5467.600	55.35	1.91	57.25	-10.95	68.20	213	305	Peak
4	5470.000	53.75	1.92	55.67	-12.53	68.20	213	305	Peak
5	5538.700	97.72	2.23	99.96	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

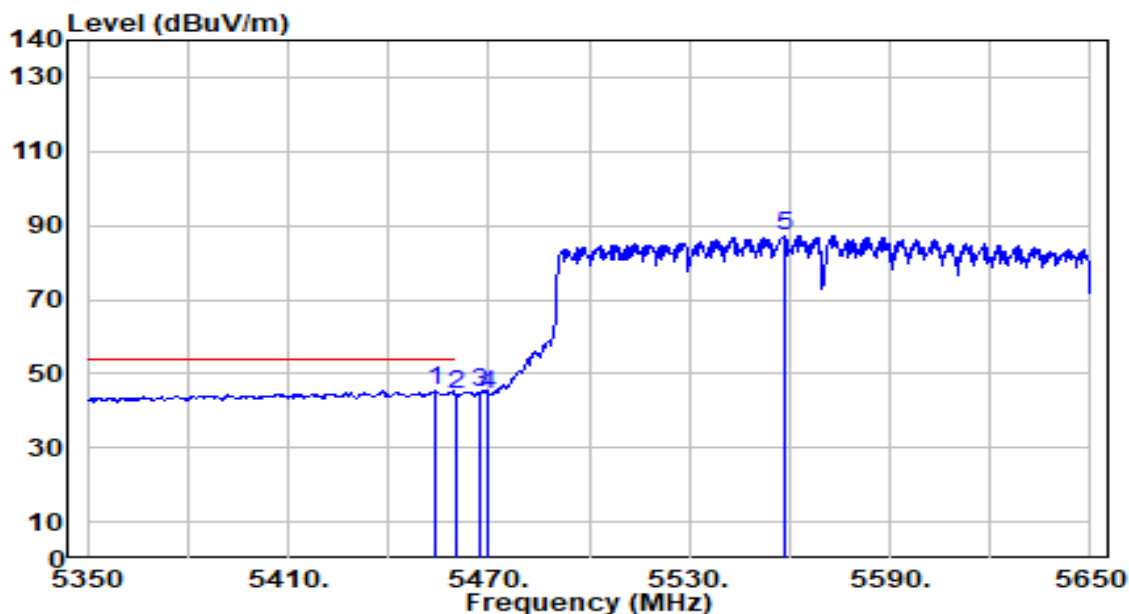


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.800	43.37	1.85	45.22	-8.78	54.00	213	305	Average
2		5460.000	42.37	1.87	44.24	-9.76	54.00	213	305	Average
3		5467.600	42.80	1.91	44.71	N/A	N/A	213	305	Average
4		5470.000	42.58	1.92	44.50	N/A	N/A	213	305	Average
5		5558.500	84.98	2.33	87.31	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

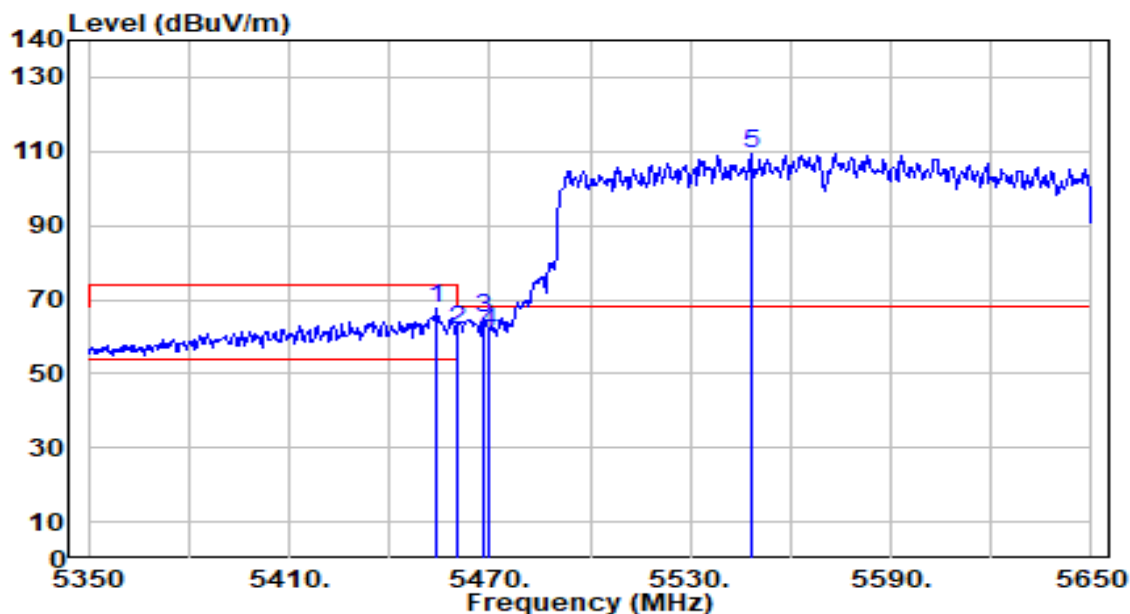


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.100	65.55	1.85	67.40	-6.60	74.00	270	277	Peak
2	5460.000	59.89	1.87	61.77	-12.23	74.00	270	277	Peak
3	* 5468.200	63.09	1.91	65.00	-3.20	68.20	270	277	Peak
4	5470.000	59.62	1.92	61.54	-6.66	68.20	270	277	Peak
5	5548.300	107.22	2.28	109.50	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

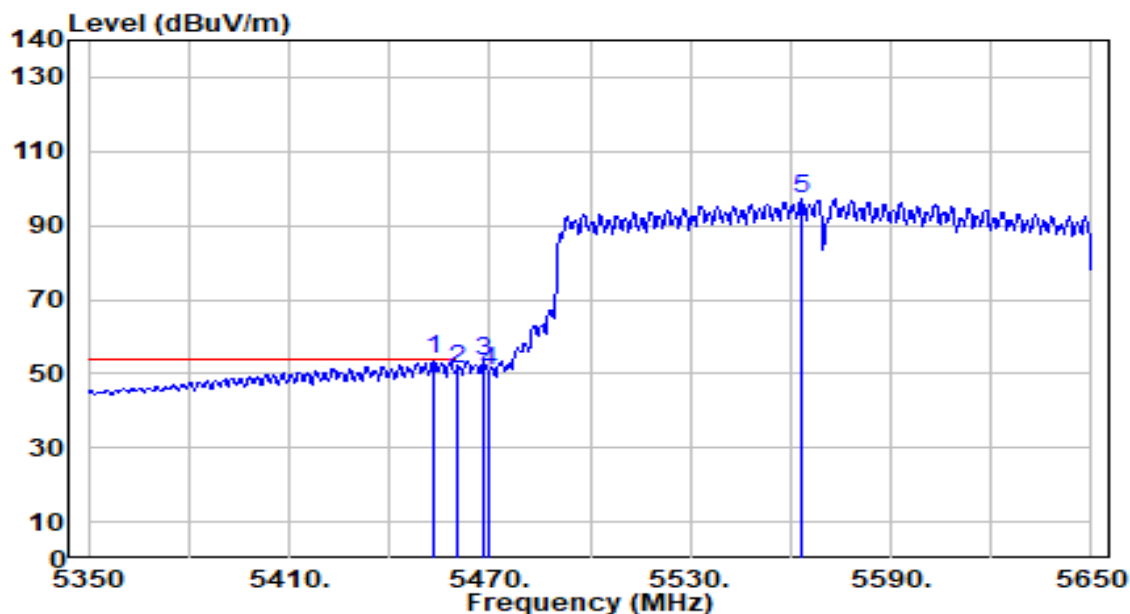


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.500	51.94	1.85	53.78	-0.22	54.00	270	277	Average
2		5460.000	49.39	1.87	51.27	-2.73	54.00	270	277	Average
3		5468.200	51.32	1.91	53.23	N/A	N/A	270	277	Average
4		5470.000	48.57	1.92	50.48	N/A	N/A	270	277	Average
5		5563.300	94.90	2.36	97.25	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

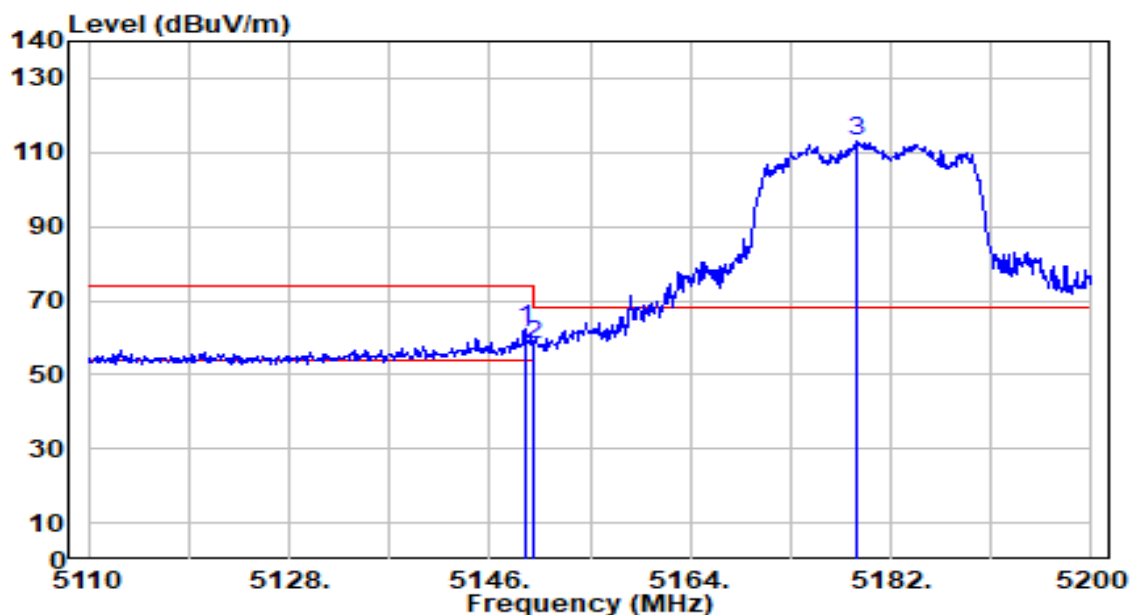


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.150	60.35	1.82	62.17	-11.83	74.00	143	343	Peak
2		5150.000	56.37	1.82	58.19	-15.81	74.00	143	343	Peak
3		5178.940	111.03	1.87	112.90	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preampifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

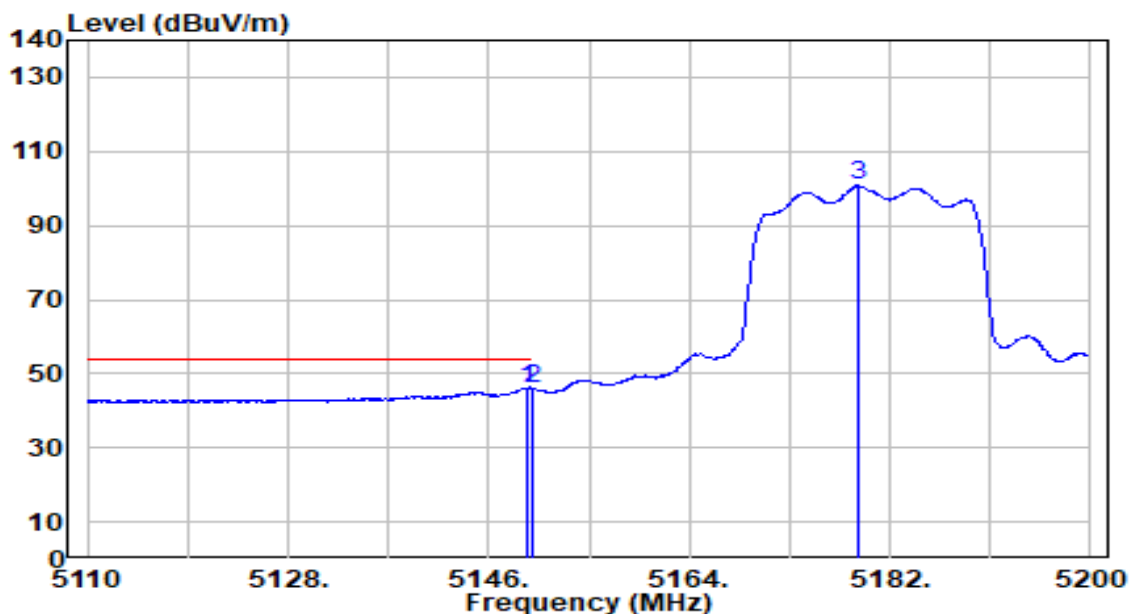


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	44.23	1.82	46.05	-7.95	54.00	143	343	Average
2		5150.000	44.05	1.82	45.87	-8.13	54.00	143	343	Average
3		5179.120	98.87	1.87	100.74	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

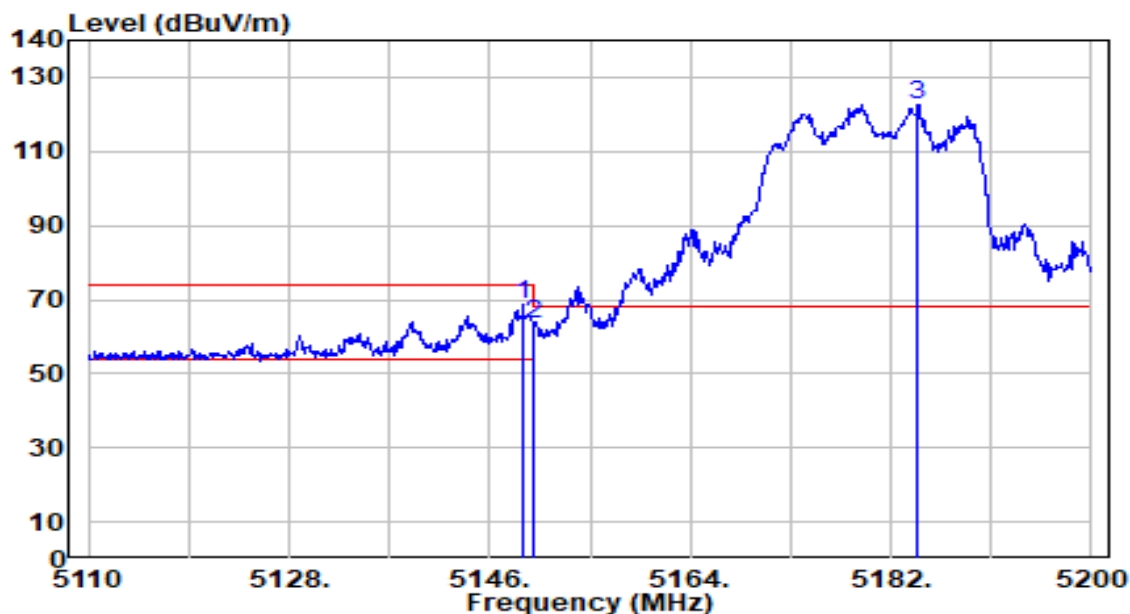


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.970	67.08	1.82	68.90	-5.10	74.00	195	159	Peak
2		5150.000	61.79	1.82	63.61	-10.39	74.00	195	159	Peak
3		5184.430	120.45	1.88	122.32	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1+2	Test Voltage	AC 120V/60Hz

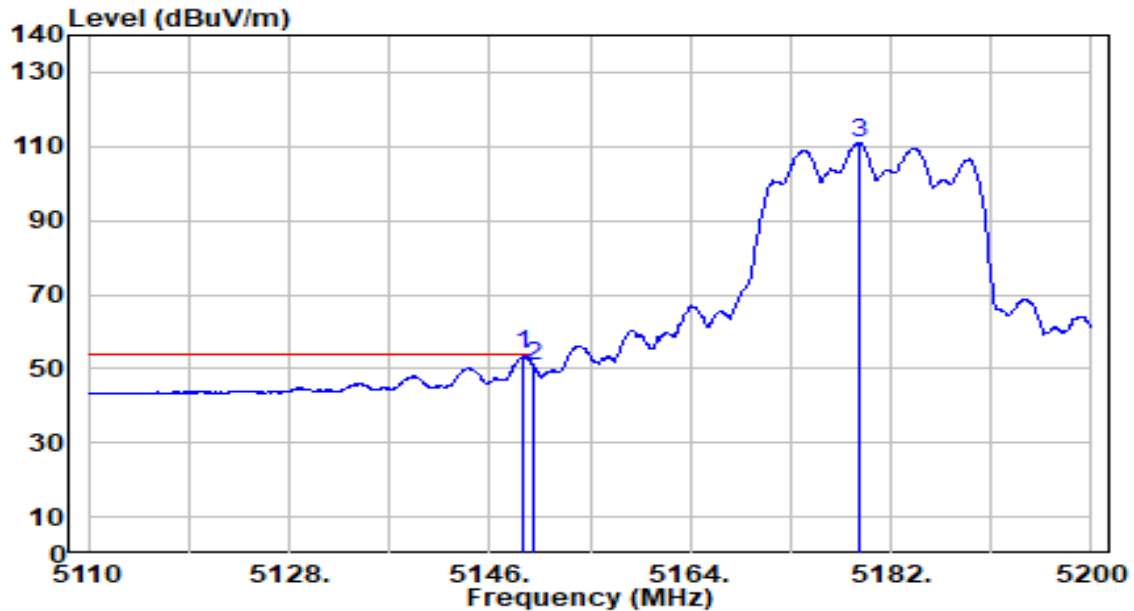


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.060	51.92	1.82	53.73	-0.27	54.00	195	159	Average
2		5150.000	48.93	1.82	50.75	-3.25	54.00	195	159	Average
3		5179.210	109.10	1.87	110.97	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

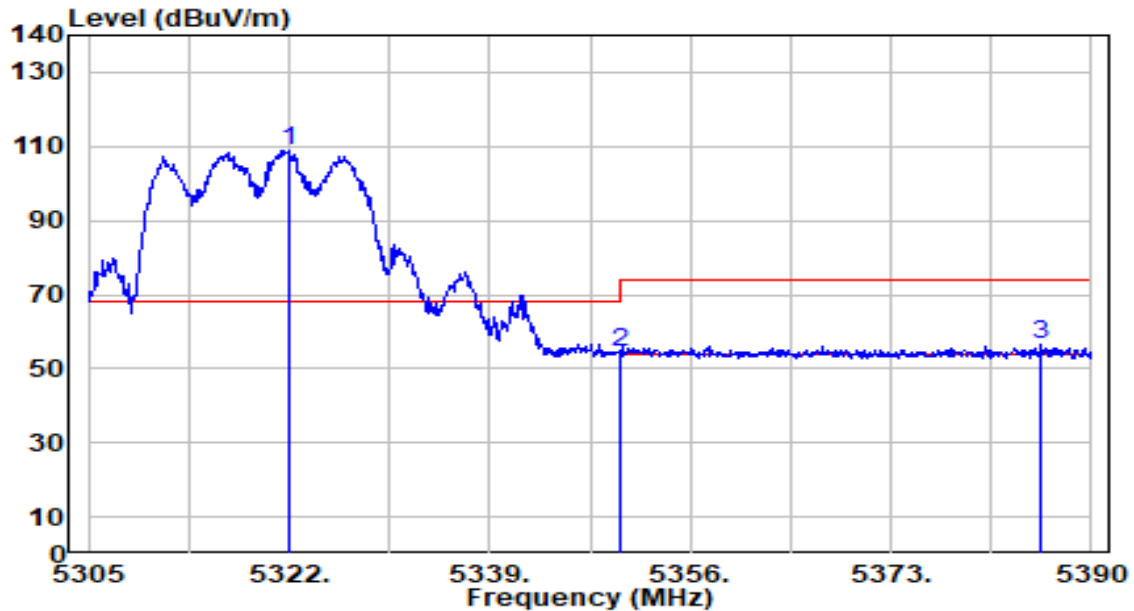


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.000	107.14	1.73	108.87	N/A	N/A	190	277	Peak
2	5350.000	52.65	1.69	54.34	-19.66	74.00	190	277	Peak
3	* 5385.750	54.87	1.64	56.51	-17.49	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

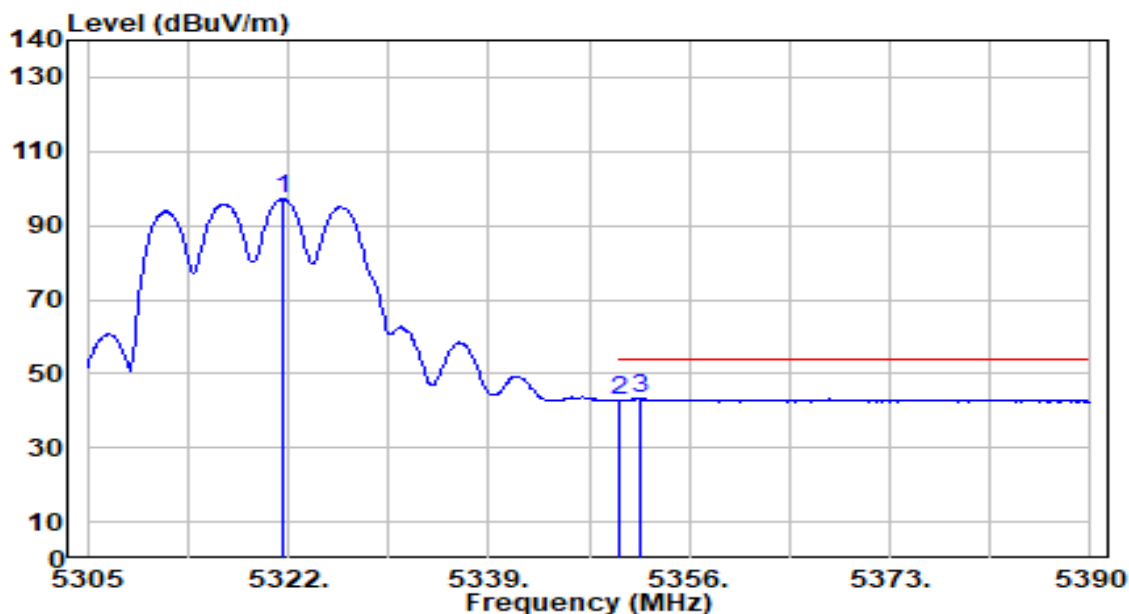


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.490	95.44	1.73	97.17	N/A	N/A	190	277	Average
2	5350.000	41.11	1.69	42.80	-11.20	54.00	190	277	Average
3	* 5351.920	41.58	1.69	43.27	-10.73	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

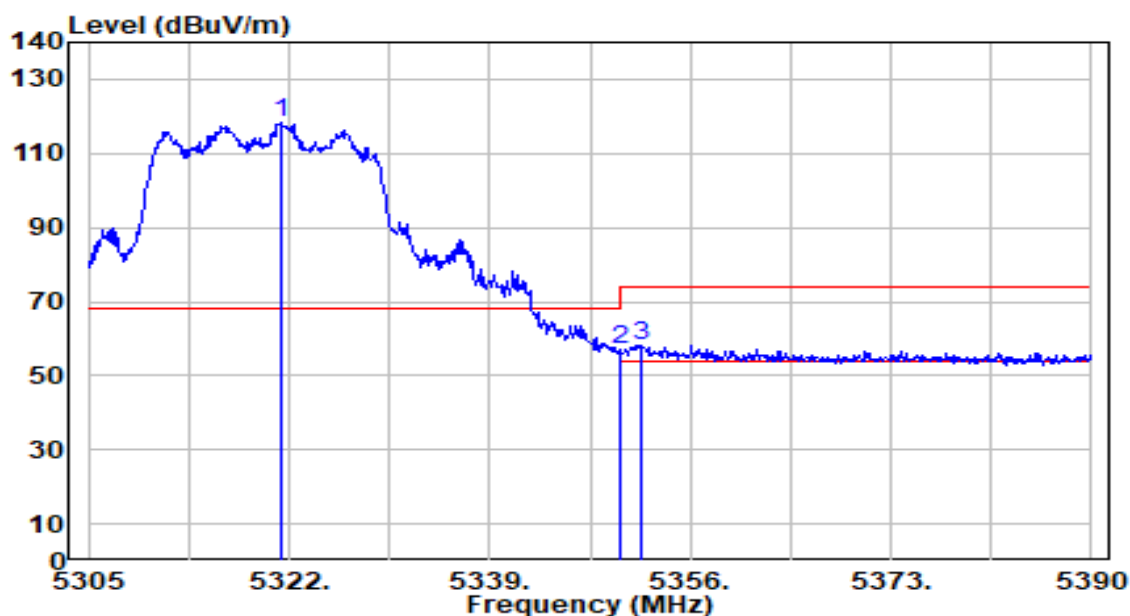


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.405	116.59	1.73	118.32	N/A	N/A	192	247	Peak
2	5350.000	55.23	1.69	56.92	-17.08	74.00	192	247	Peak
3	* 5351.750	56.68	1.69	58.37	-15.63	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1+2	Test Voltage	AC 120V/60Hz

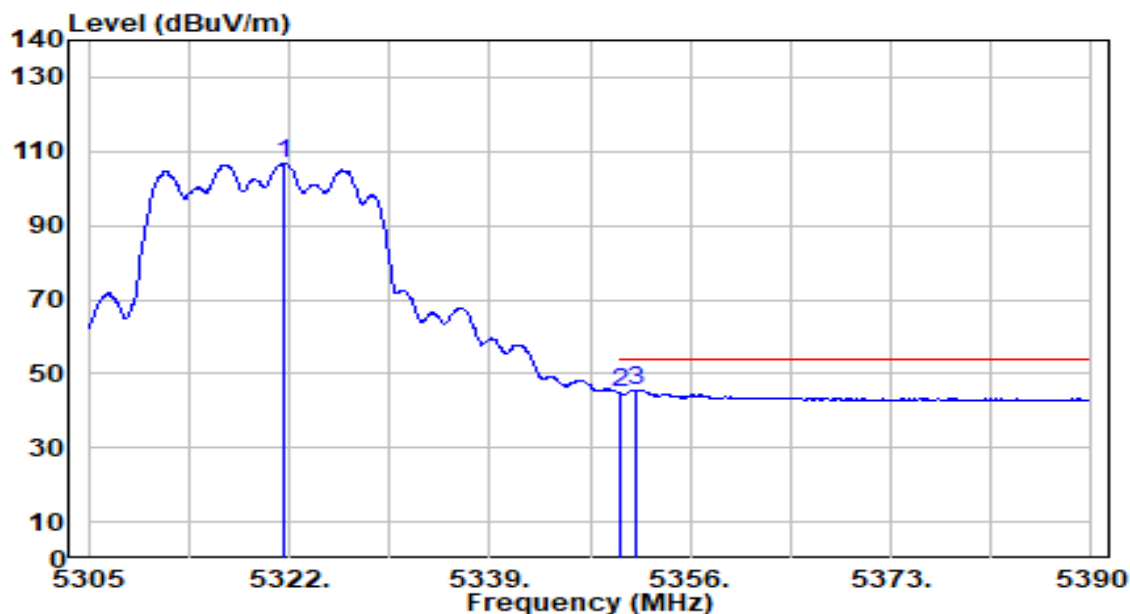


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.490	105.10	1.73	106.83	N/A	N/A	192	247	Average
2	5350.000	43.14	1.69	44.83	-9.17	54.00	192	247	Average
3	* 5351.410	44.01	1.69	45.69	-8.31	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

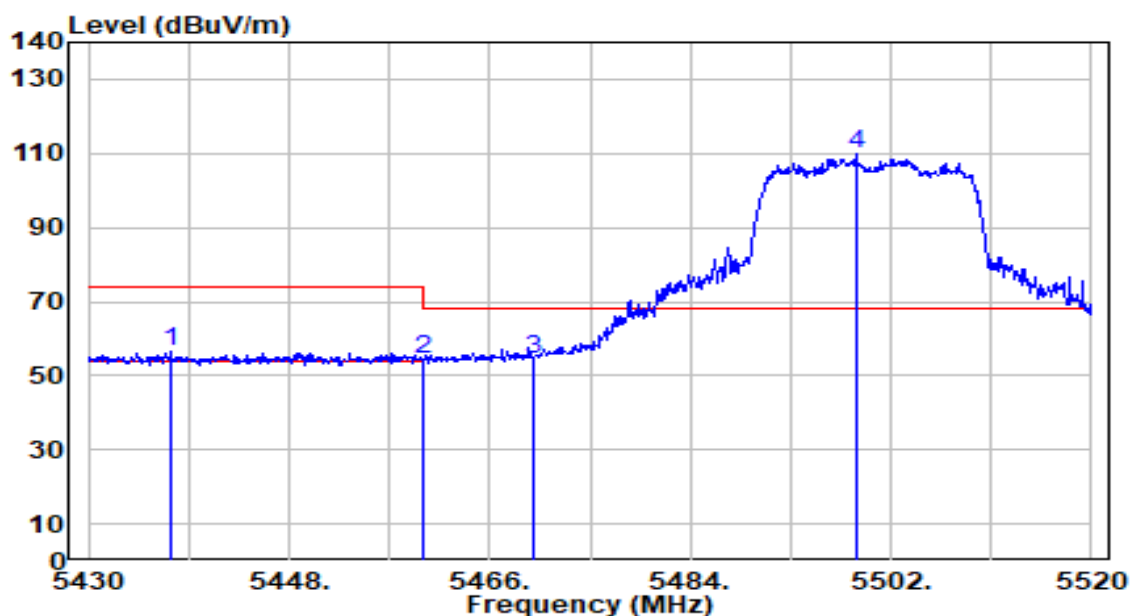


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.380	54.57	1.78	56.35	-17.65	74.00	213	305	Peak
2	5460.000	52.39	1.87	54.27	-19.73	74.00	213	305	Peak
3	* 5470.000	52.52	1.92	54.44	-13.76	68.20	213	305	Peak
4	5498.940	107.85	2.04	109.88	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

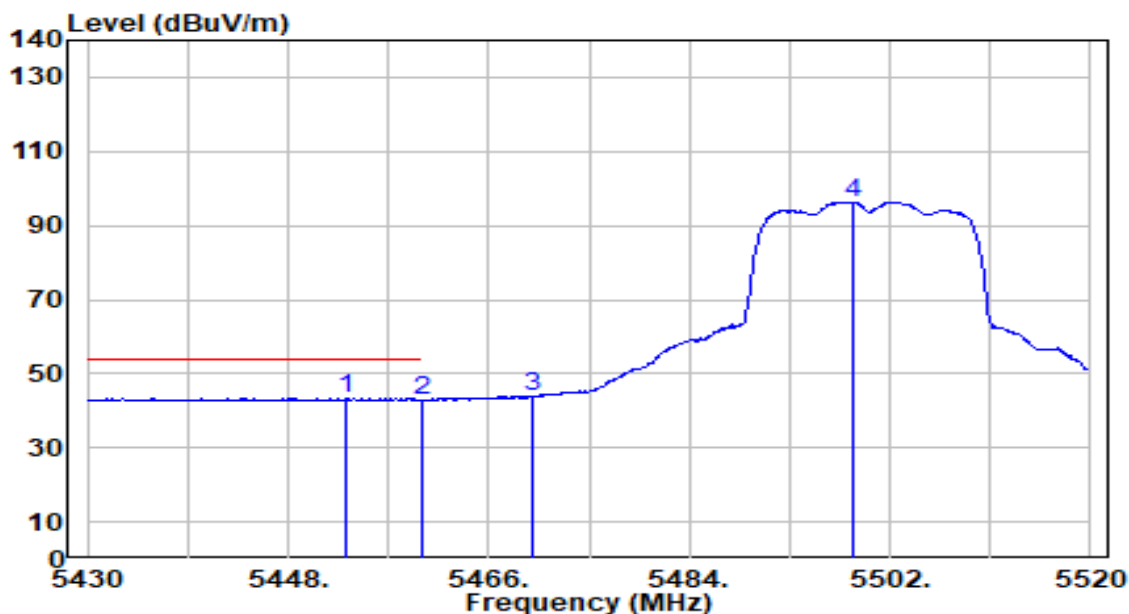


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.220	41.41	1.85	43.25	-10.75	54.00	213	305	Average
2		5460.000	41.00	1.87	42.87	-11.13	54.00	213	305	Average
3		5470.000	41.79	1.92	43.70	N/A	N/A	213	305	Average
4		5498.670	94.38	2.03	96.41	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

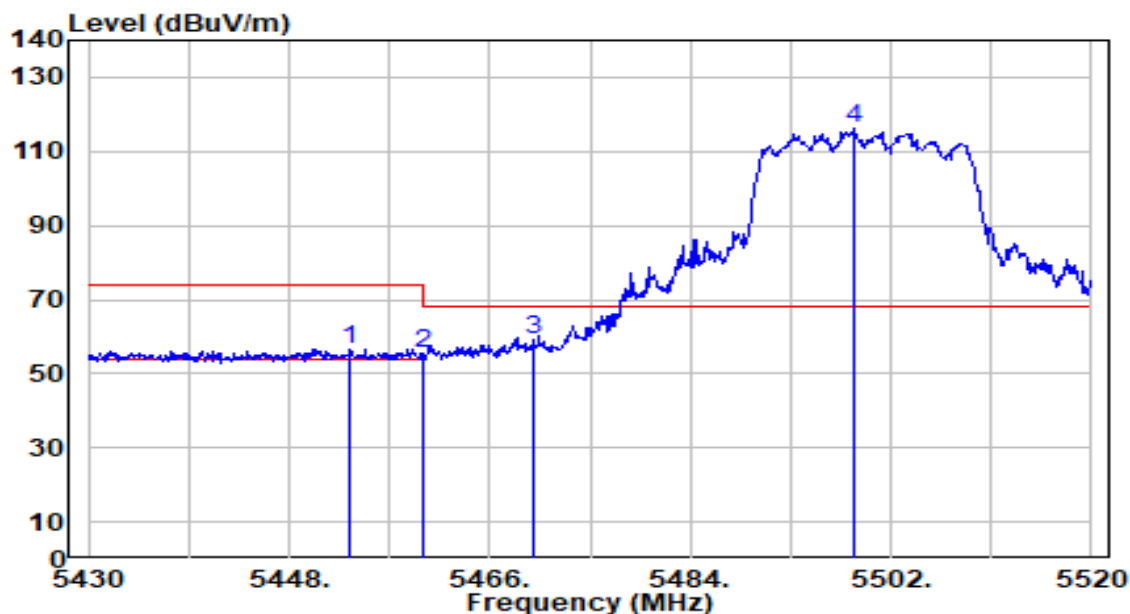


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5453.400	54.85	1.85	56.69	-17.31	74.00	270	277	Peak
2		5460.000	53.83	1.87	55.70	-18.30	74.00	270	277	Peak
3	*	5470.000	57.06	1.92	58.97	-9.23	68.20	270	277	Peak
4		5498.670	114.24	2.03	116.28	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1+2	Test Voltage	AC 120V/60Hz

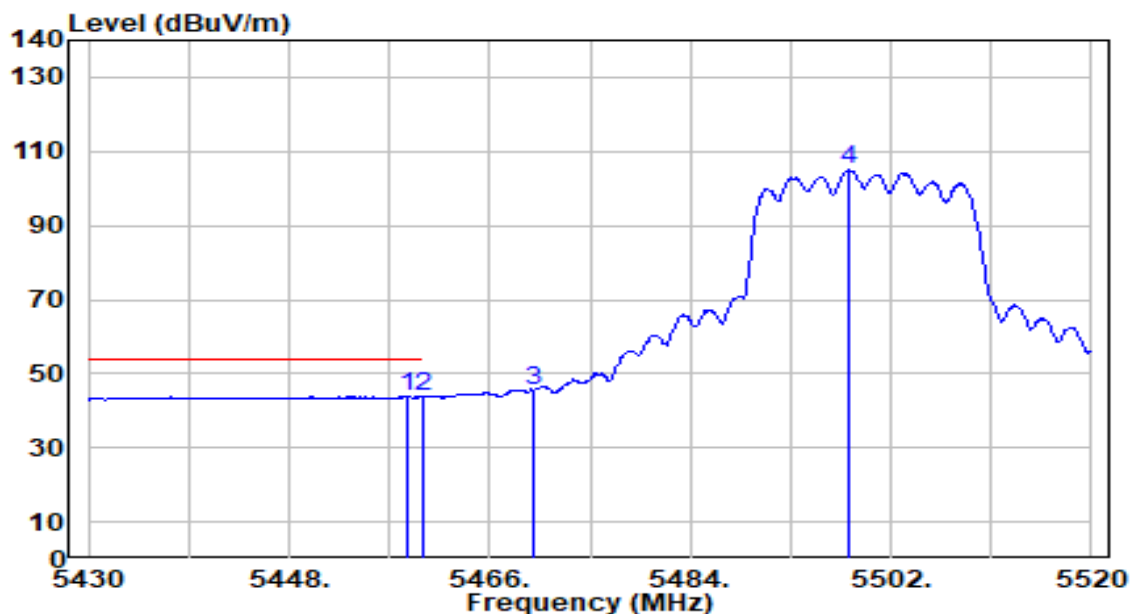


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.710	41.95	1.87	43.82	-10.18	54.00	270	277	Average
2		5460.000	41.89	1.87	43.77	-10.23	54.00	270	277	Average
3		5470.000	43.61	1.92	45.52	N/A	N/A	270	277	Average
4		5498.310	102.86	2.03	104.89	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

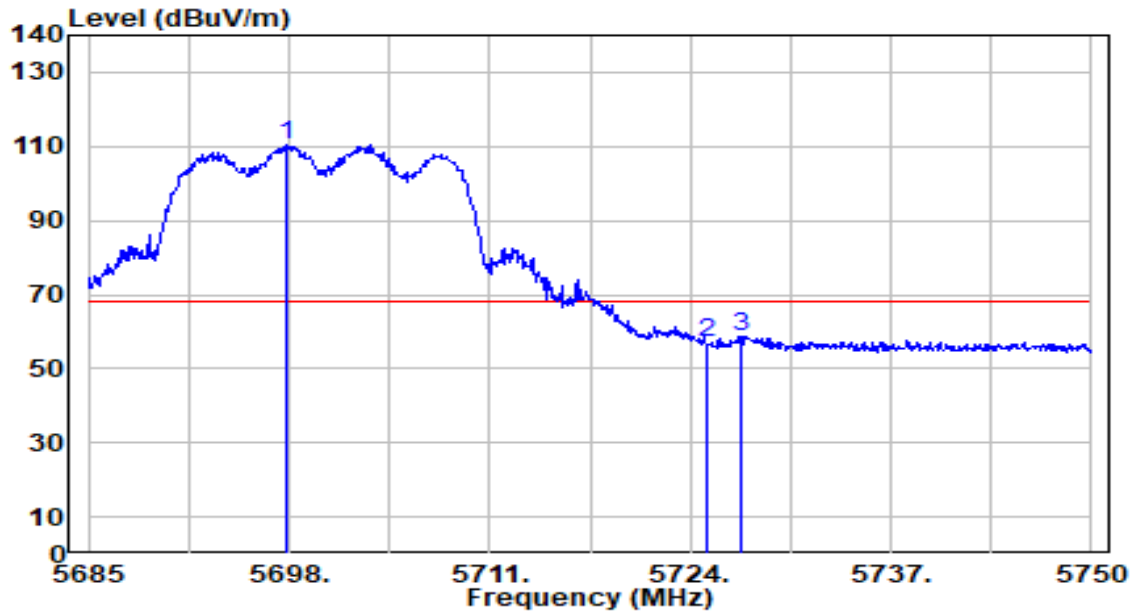


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5697.805	107.51	3.01	110.51	N/A	N/A	188	310	Peak
2	5725.000	53.88	3.14	57.02	-11.18	68.20	188	310	Peak
3	* 5727.315	55.68	3.15	58.83	-9.37	68.20	188	310	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1+2	Test Voltage	AC 120V/60Hz

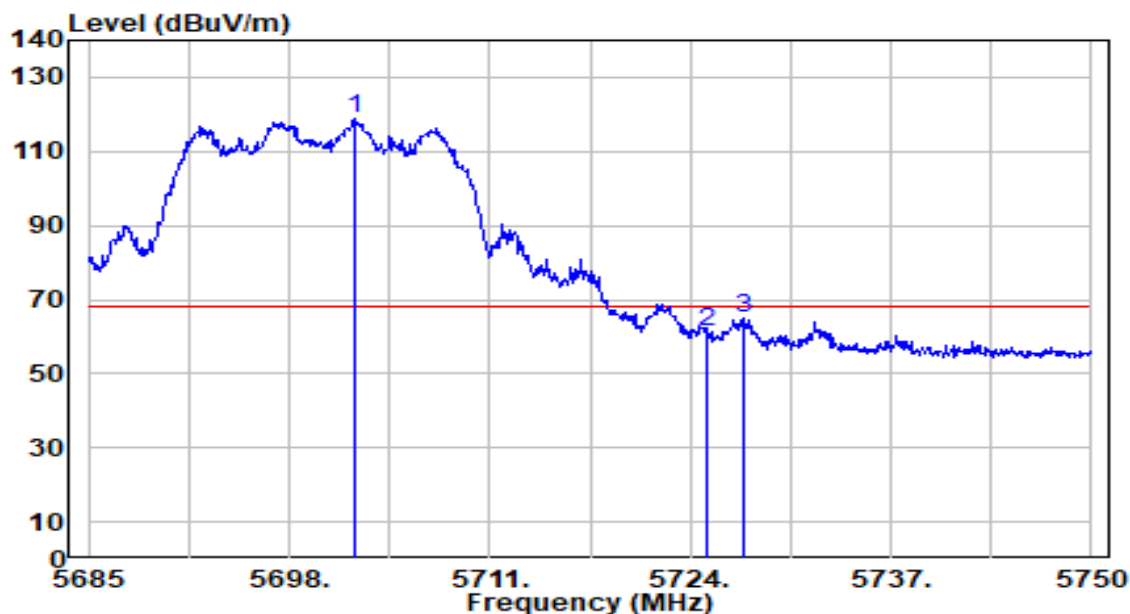


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.225	115.79	3.03	118.82	N/A	N/A	157	265	Peak
2	5725.000	58.29	3.14	61.43	-6.77	68.20	157	265	Peak
3	* 5727.445	62.04	3.15	65.20	-3.00	68.20	157	265	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

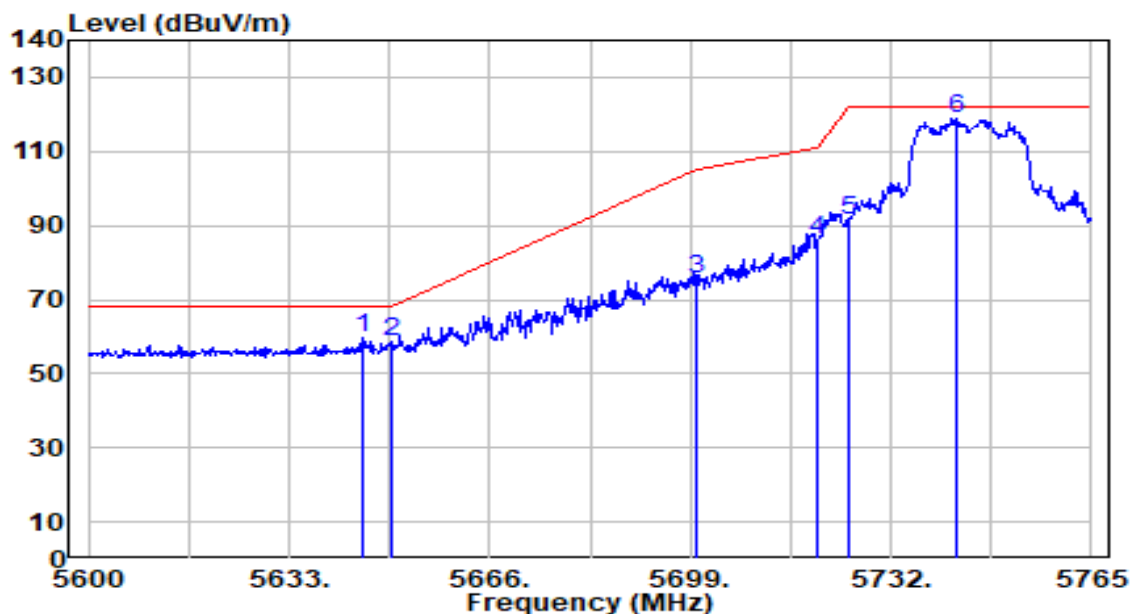


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.210	56.85	2.75	59.61	-8.59	68.20	194	304	Peak
2		5650.000	55.67	2.78	58.45	-9.75	68.20	194	304	Peak
3		5700.000	72.79	3.02	75.81	-29.39	105.20	194	304	Peak
4		5720.000	83.21	3.12	86.33	-24.47	110.80	194	304	Peak
5		5725.000	88.12	3.14	91.26	-30.94	122.20	194	304	Peak
6		5742.725	115.54	3.23	118.77	N/A	N/A	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1+2	Test Voltage	AC 120V/60Hz

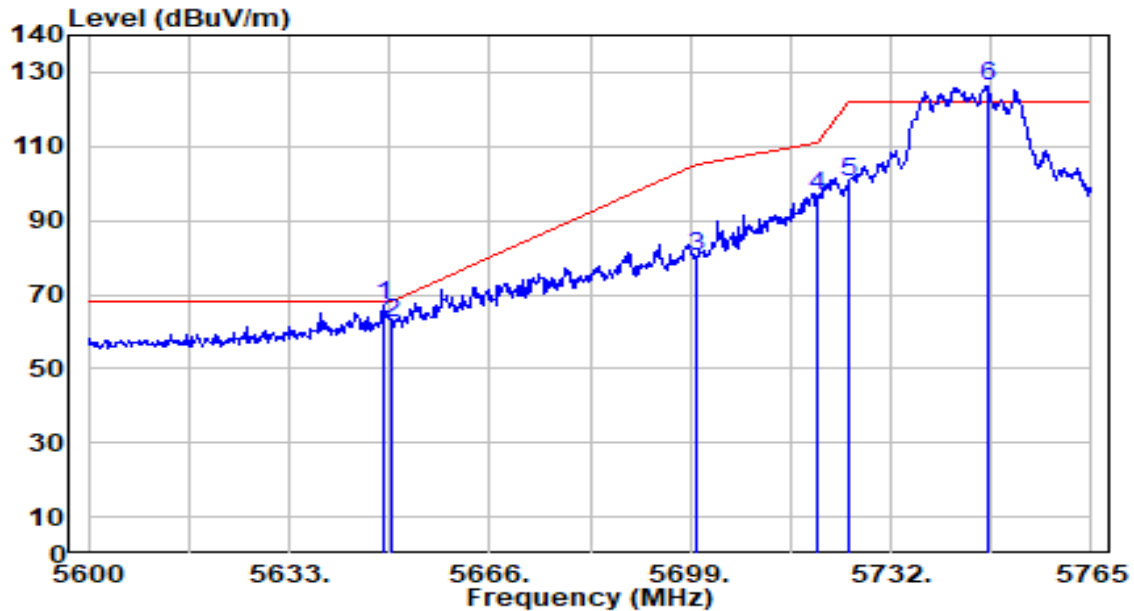


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.675	64.17	2.77	66.94	-1.26	68.20	167	270	Peak
2		5650.000	59.65	2.78	62.42	-5.78	68.20	167	270	Peak
3		5700.000	77.10	3.02	80.11	-25.09	105.20	167	270	Peak
4		5720.000	93.65	3.12	96.77	-14.03	110.80	167	270	Peak
5		5725.000	97.19	3.14	100.33	-21.87	122.20	167	270	Peak
6		5747.840	123.03	3.25	126.29	N/A	N/A	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

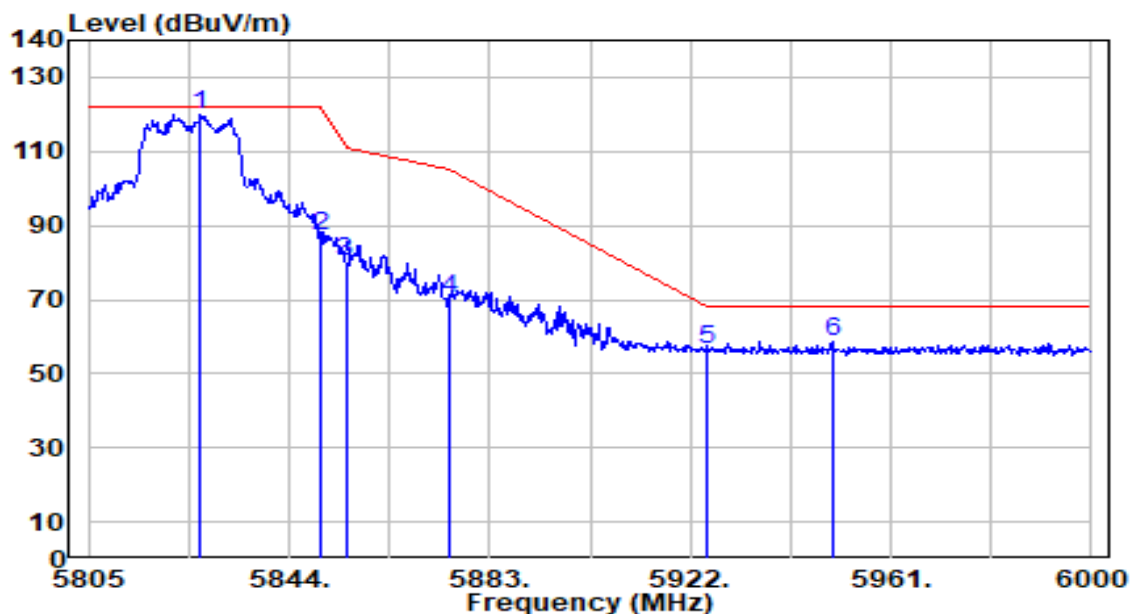


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.840	116.44	3.51	119.96	N/A	N/A	182	305	Peak
2	5850.000	83.49	3.51	87.00	-35.20	122.20	182	305	Peak
3	5855.000	77.03	3.51	80.54	-30.26	110.80	182	305	Peak
4	5875.000	66.76	3.50	70.26	-34.94	105.20	182	305	Peak
5	5925.000	53.25	3.51	56.76	-11.44	68.20	182	305	Peak
6	* 5949.690	54.99	3.52	58.51	-9.69	68.20	182	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1+2	Test Voltage	AC 120V/60Hz

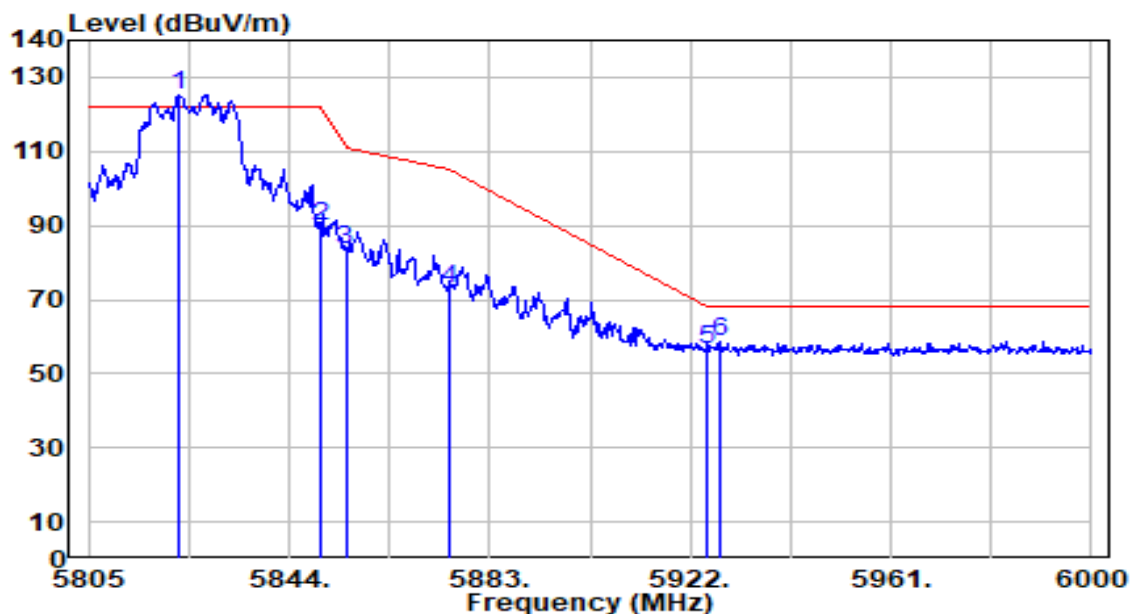


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.550	121.69	3.51	125.20	N/A	N/A	184	273	Peak
2	5850.000	86.16	3.51	89.67	-32.53	122.20	184	273	Peak
3	5855.000	80.13	3.51	83.64	-27.16	110.80	184	273	Peak
4	5875.000	69.30	3.50	72.80	-32.40	105.20	184	273	Peak
5	5925.000	53.12	3.51	56.64	-11.56	68.20	184	273	Peak
6	* 5927.655	55.04	3.51	58.55	-9.65	68.20	184	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

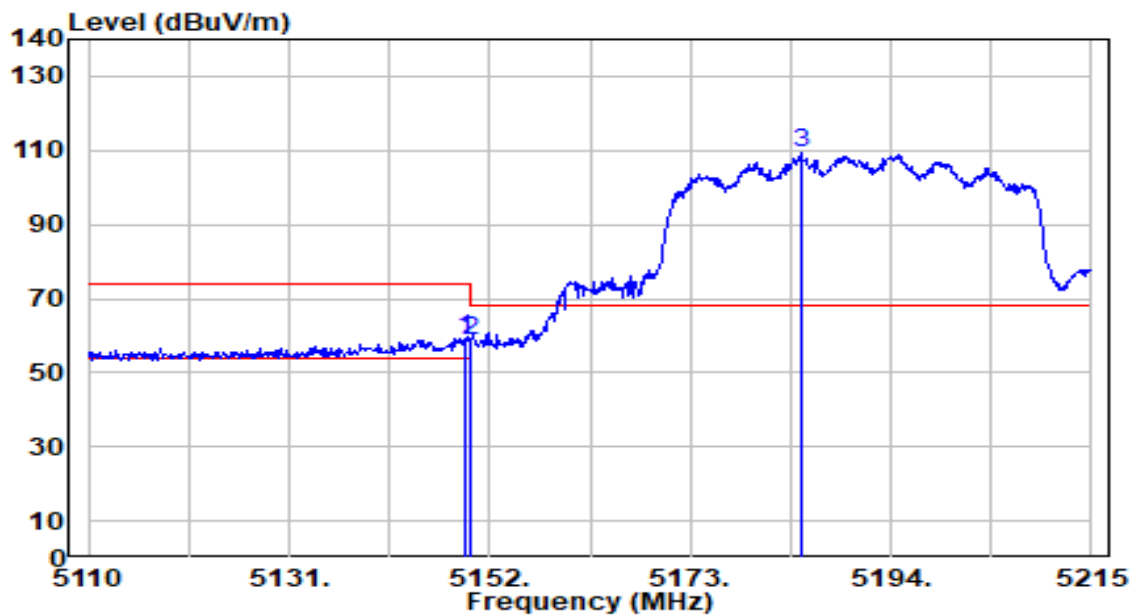


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.375	57.39	1.82	59.21	-14.79	74.00	143	343	Peak
2		5150.000	56.68	1.82	58.50	-15.50	74.00	143	343	Peak
3		5184.550	107.34	1.88	109.21	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

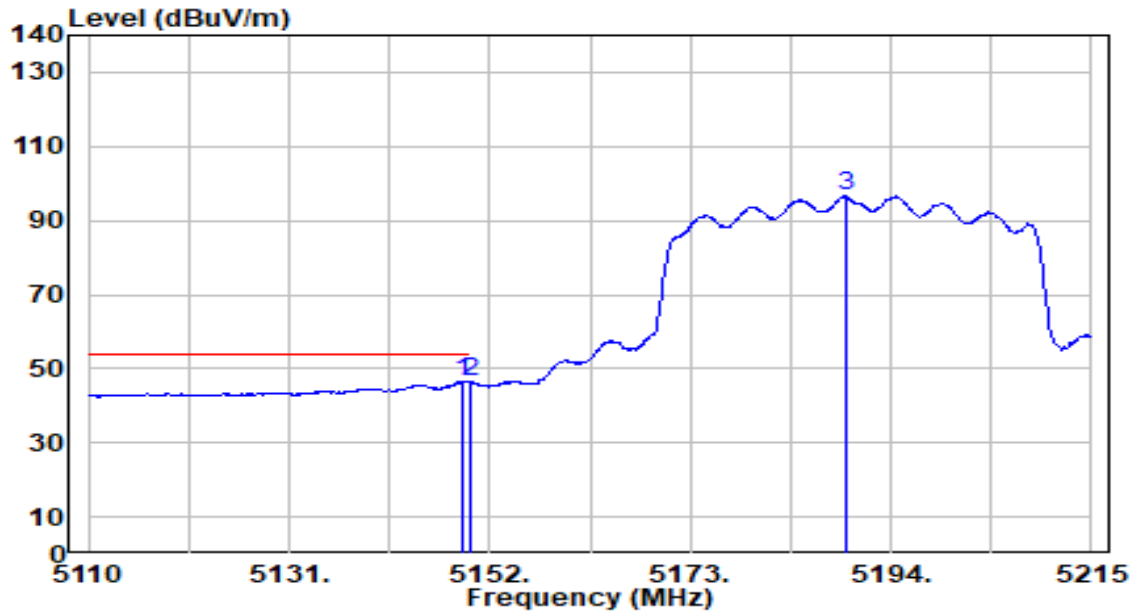


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.270	44.84	1.82	46.65	-7.35	54.00	143	343	Average
2		5150.000	44.55	1.82	46.37	-7.63	54.00	143	343	Average
3		5189.275	94.64	1.88	96.52	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

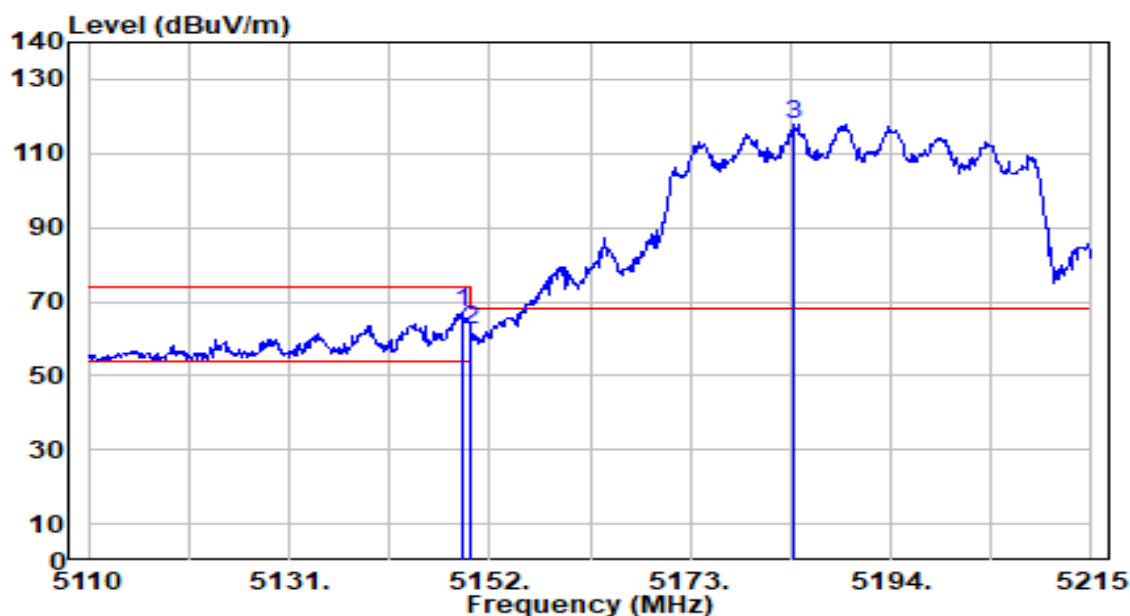


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.165	65.32	1.82	67.13	-6.87	74.00	195	159	Peak
2		5150.000	60.40	1.82	62.22	-11.78	74.00	195	159	Peak
3		5183.815	116.09	1.88	117.97	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1+2	Test Voltage	AC 120V/60Hz

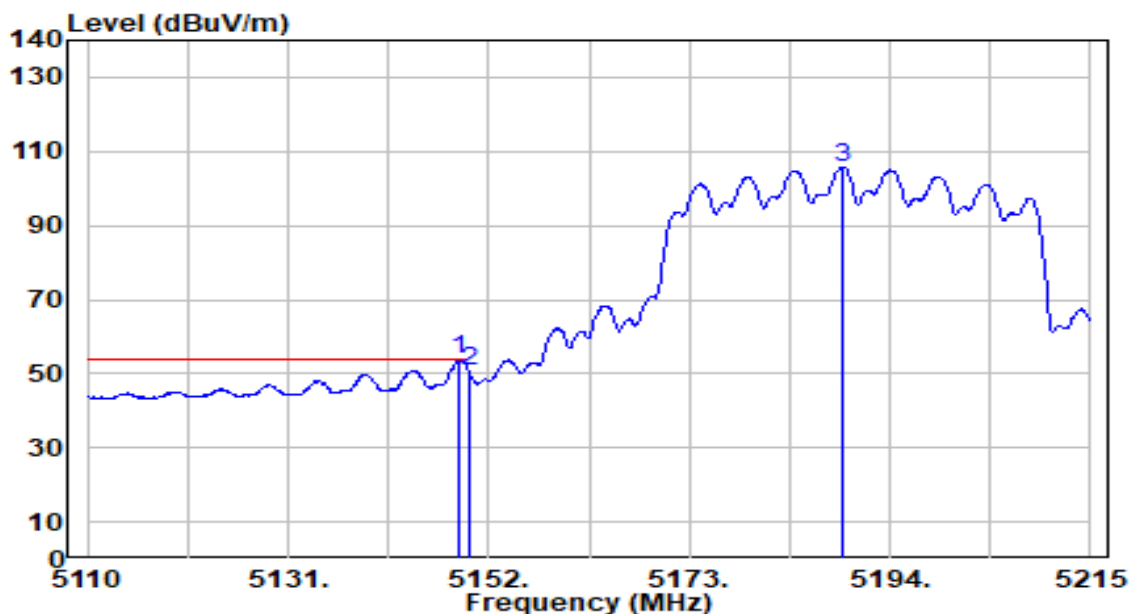


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.955	51.96	1.82	53.78	-0.22	54.00	195	159	Average
2		5150.000	48.71	1.82	50.53	-3.47	54.00	195	159	Average
3		5189.170	103.94	1.88	105.82	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

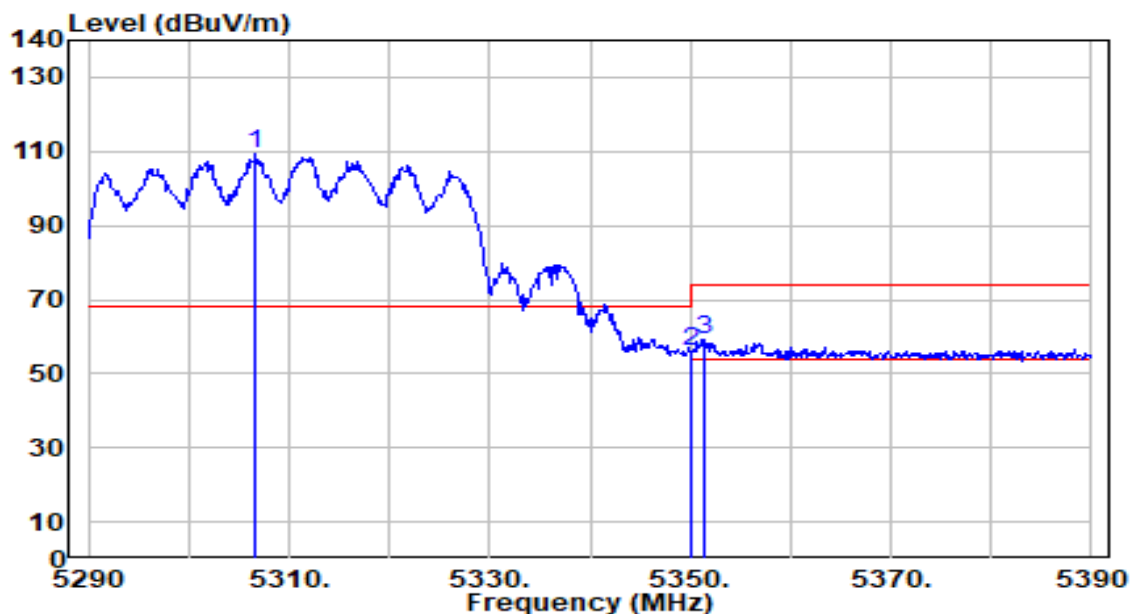


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5306.600	107.38	1.75	109.13	N/A	N/A	190	277	Peak
2	5350.000	54.23	1.69	55.92	-18.08	74.00	190	277	Peak
3	* 5351.300	57.55	1.69	59.24	-14.76	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

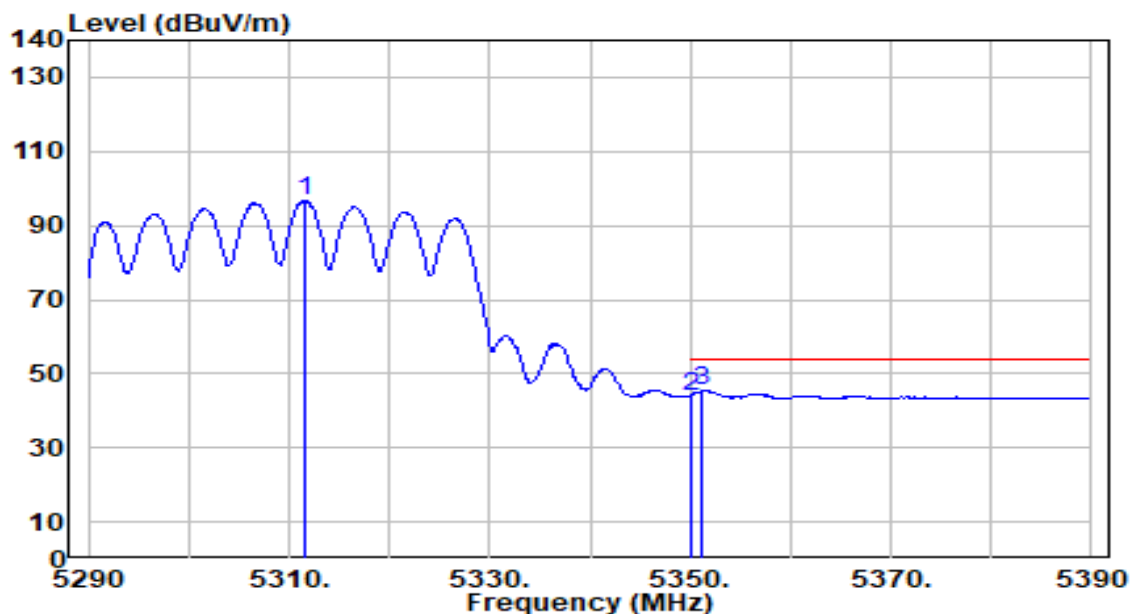


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.500	94.98	1.74	96.72	N/A	N/A	190	277	Average
2	5350.000	42.33	1.69	44.02	-9.98	54.00	190	277	Average
3	* 5351.200	43.91	1.69	45.60	-8.40	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

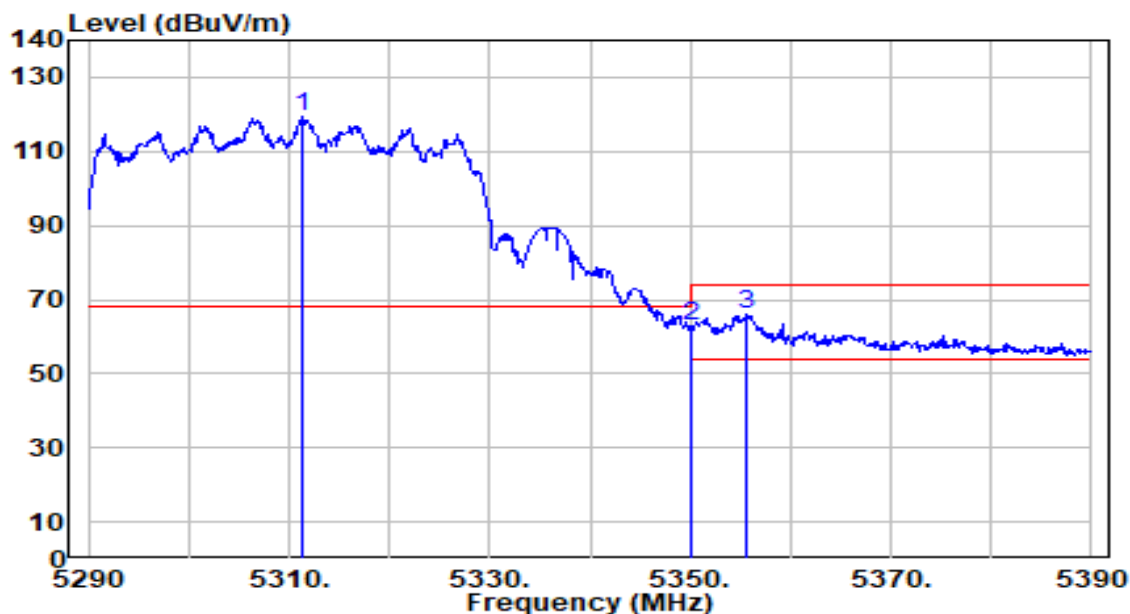


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.300	117.50	1.74	119.24	N/A	N/A	192	247	Peak
2	5350.000	61.12	1.69	62.81	-11.19	74.00	192	247	Peak
3	* 5355.700	64.14	1.68	65.82	-8.18	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1+2	Test Voltage	AC 120V/60Hz

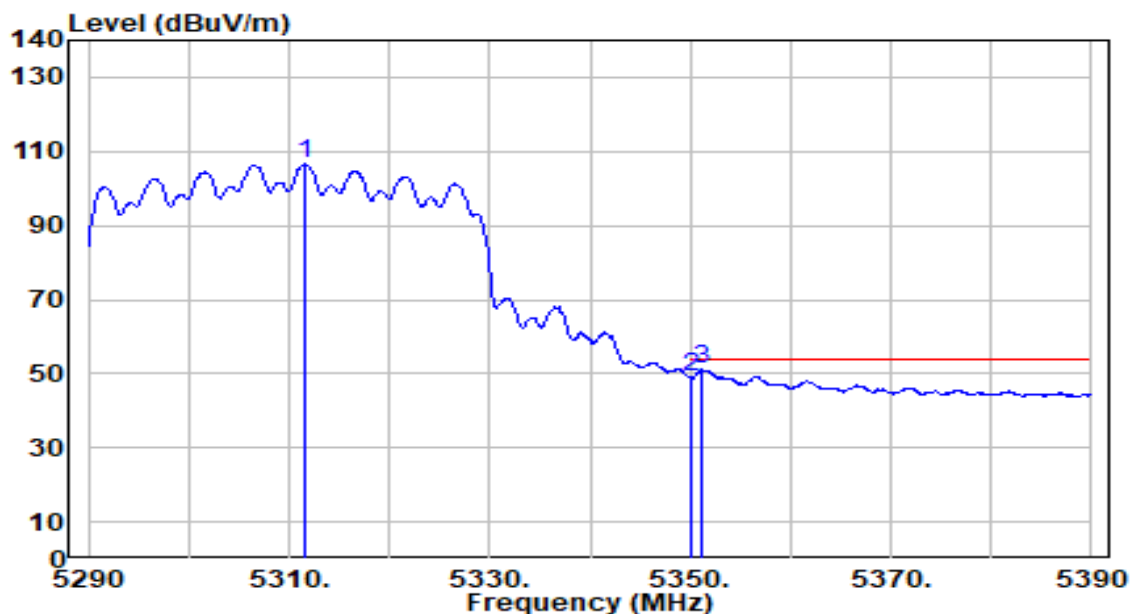


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.500	104.76	1.74	106.50	N/A	N/A	192	247	Average
2	5350.000	47.24	1.69	48.93	-5.07	54.00	192	247	Average
3	* 5351.200	49.33	1.69	51.02	-2.98	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

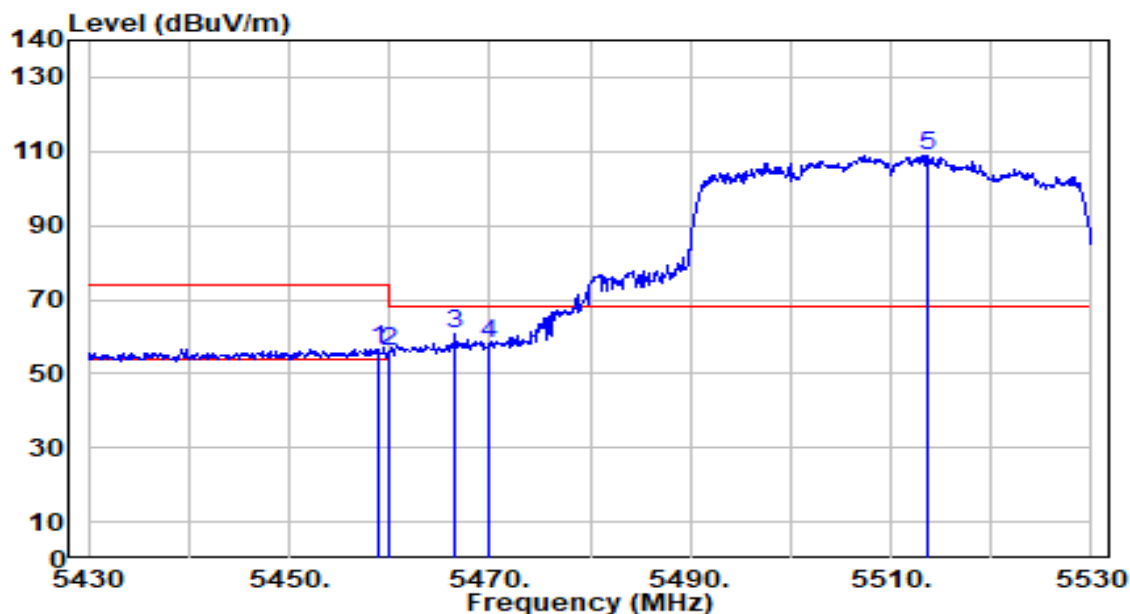


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.800	54.77	1.87	56.64	-17.36	74.00	213	305	Peak
2	5460.000	54.01	1.87	55.89	-18.11	74.00	213	305	Peak
3	* 5466.600	58.80	1.90	60.70	-7.50	68.20	213	305	Peak
4	5470.000	56.14	1.92	58.06	-10.14	68.20	213	305	Peak
5	5513.600	106.89	2.11	109.00	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

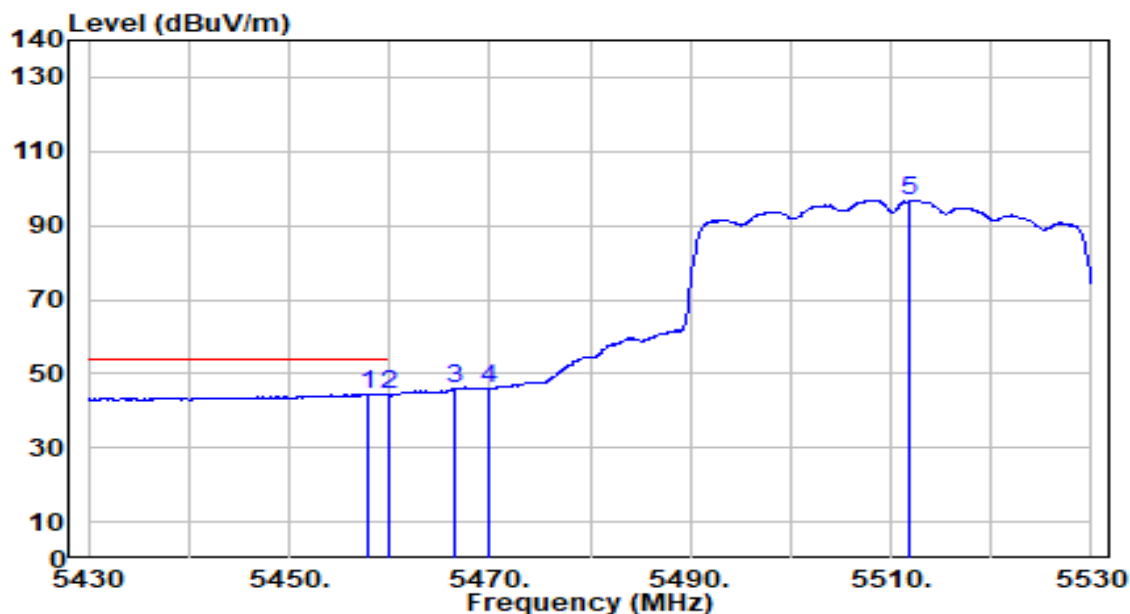


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.900	42.63	1.86	44.50	-9.50	54.00	213	305	Average
2		5460.000	42.27	1.87	44.14	-9.86	54.00	213	305	Average
3		5466.600	43.95	1.90	45.85	N/A	N/A	213	305	Average
4		5470.000	44.12	1.92	46.04	N/A	N/A	213	305	Average
5		5511.900	94.65	2.10	96.75	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

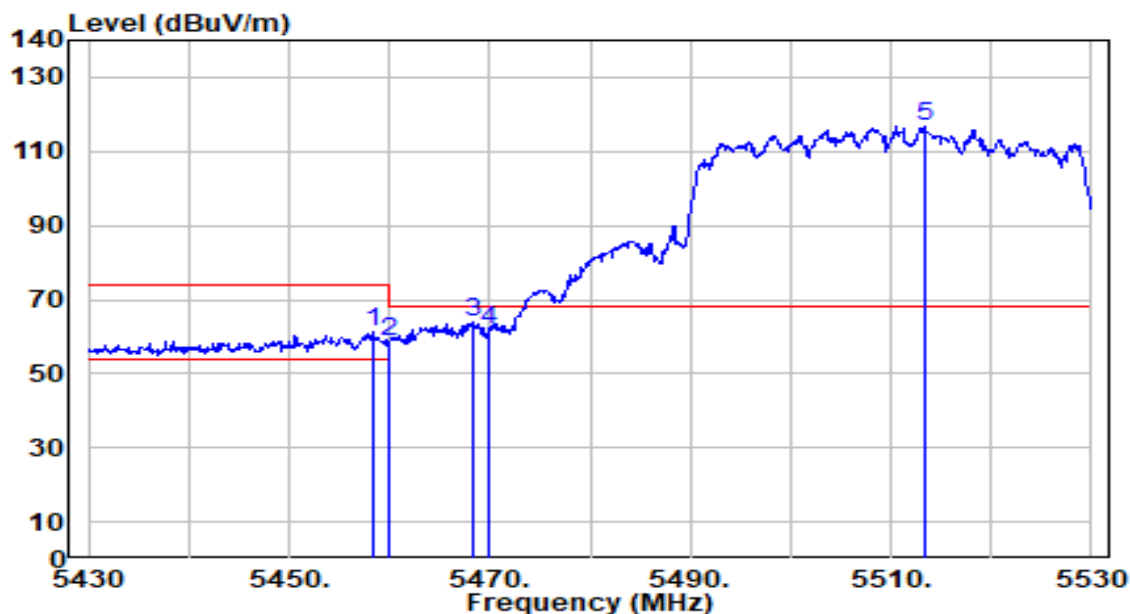


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.400	59.26	1.87	61.12	-12.88	74.00	270	277	Peak
2	5460.000	56.70	1.87	58.58	-15.42	74.00	270	277	Peak
3	* 5468.300	61.76	1.91	63.67	-4.53	68.20	270	277	Peak
4	5470.000	59.83	1.92	61.74	-6.46	68.20	270	277	Peak
5	5513.400	114.70	2.11	116.80	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1+2	Test Voltage	AC 120V/60Hz

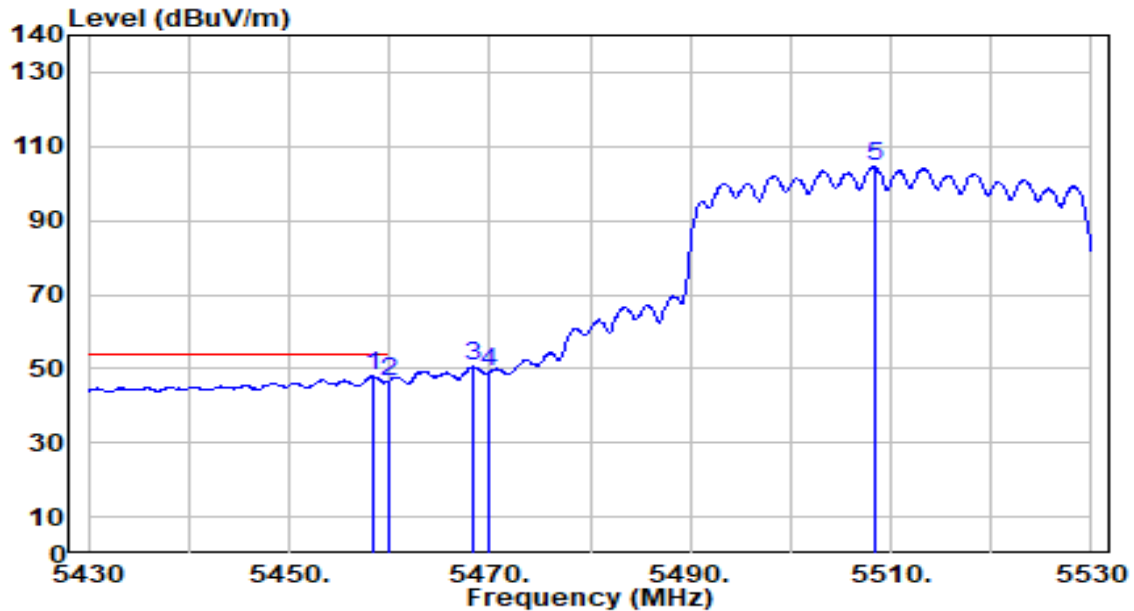


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.300	46.18	1.87	48.05	-5.95	54.00	270	277	Average
2		5460.000	44.86	1.87	46.74	-7.26	54.00	270	277	Average
3		5468.300	48.56	1.91	50.47	N/A	N/A	270	277	Average
4		5470.000	47.11	1.92	49.03	N/A	N/A	270	277	Average
5		5508.400	102.35	2.08	104.43	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

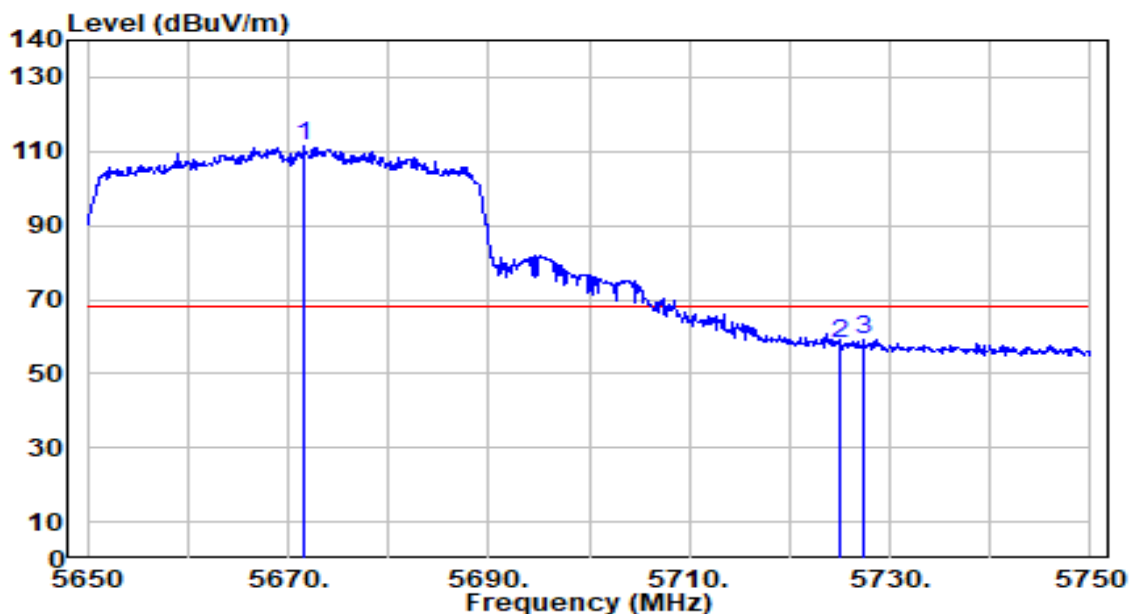


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.700	108.50	2.88	111.38	N/A	N/A	188	304	Peak
2	5725.000	54.95	3.14	58.09	-10.11	68.20	188	304	Peak
3	* 5727.500	56.22	3.15	59.38	-8.82	68.20	188	304	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1+2	Test Voltage	AC 120V/60Hz

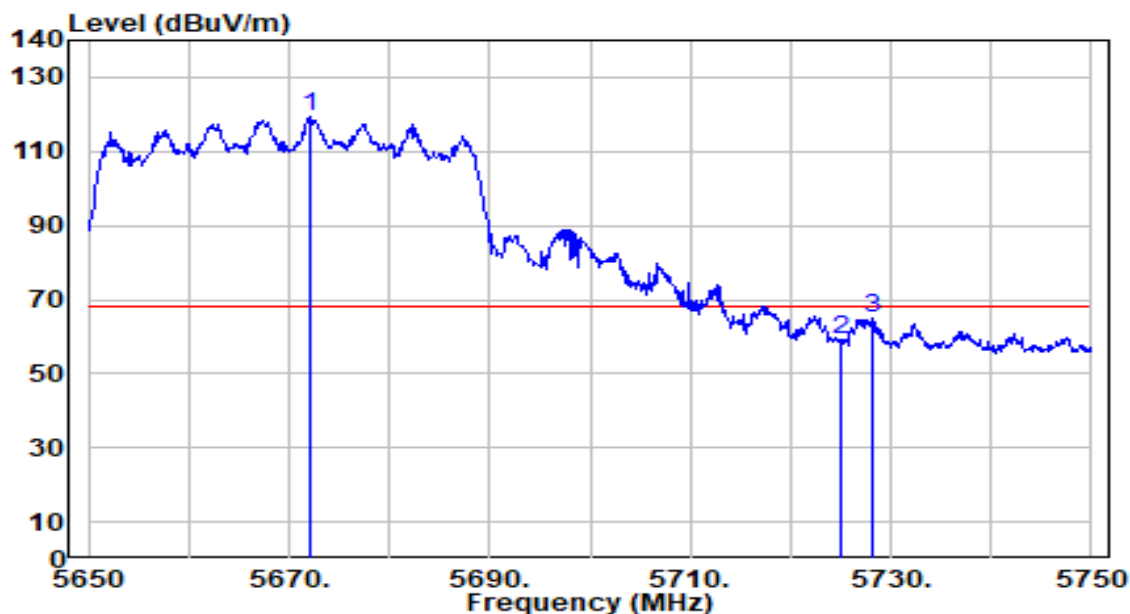


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5672.100	116.40	2.88	119.29	N/A	N/A	157	265	Peak
2	5725.000	56.20	3.14	59.34	-8.86	68.20	157	265	Peak
3	* 5728.200	61.56	3.16	64.72	-3.48	68.20	157	265	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

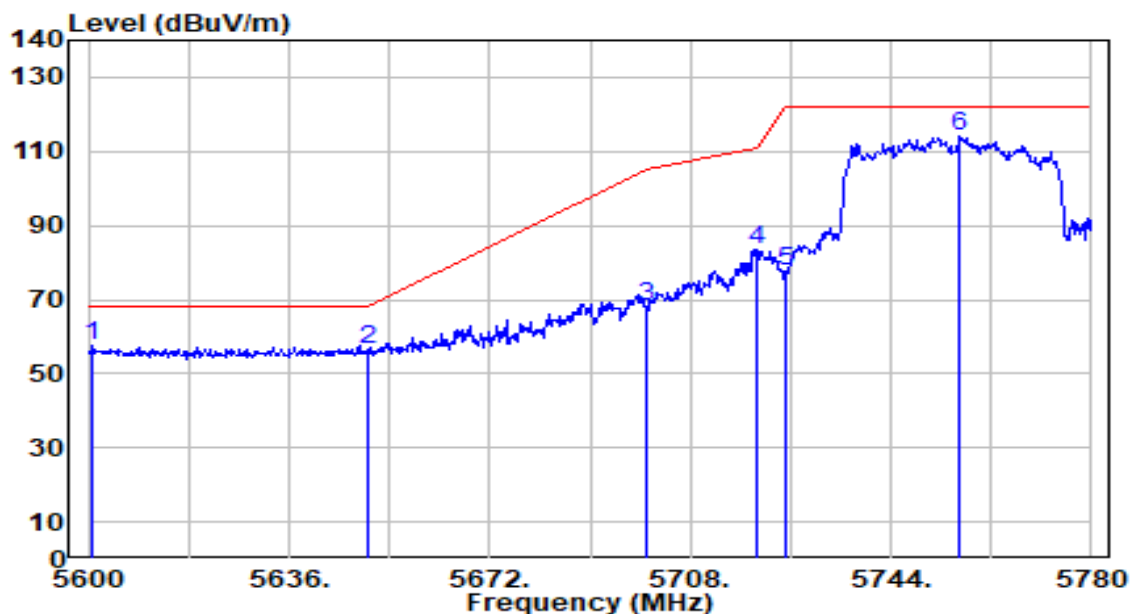


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5600.720	55.29	2.54	57.83	-10.37	68.20	194	304	Peak
2		5650.000	53.78	2.78	56.56	-11.64	68.20	194	304	Peak
3		5700.000	65.27	3.02	68.29	-36.91	105.20	194	304	Peak
4		5720.000	80.52	3.12	83.63	-27.17	110.80	194	304	Peak
5		5725.000	74.75	3.14	77.89	-44.31	122.20	194	304	Peak
6		5756.420	110.83	3.30	114.13	N/A	N/A	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1+2	Test Voltage	AC 120V/60Hz

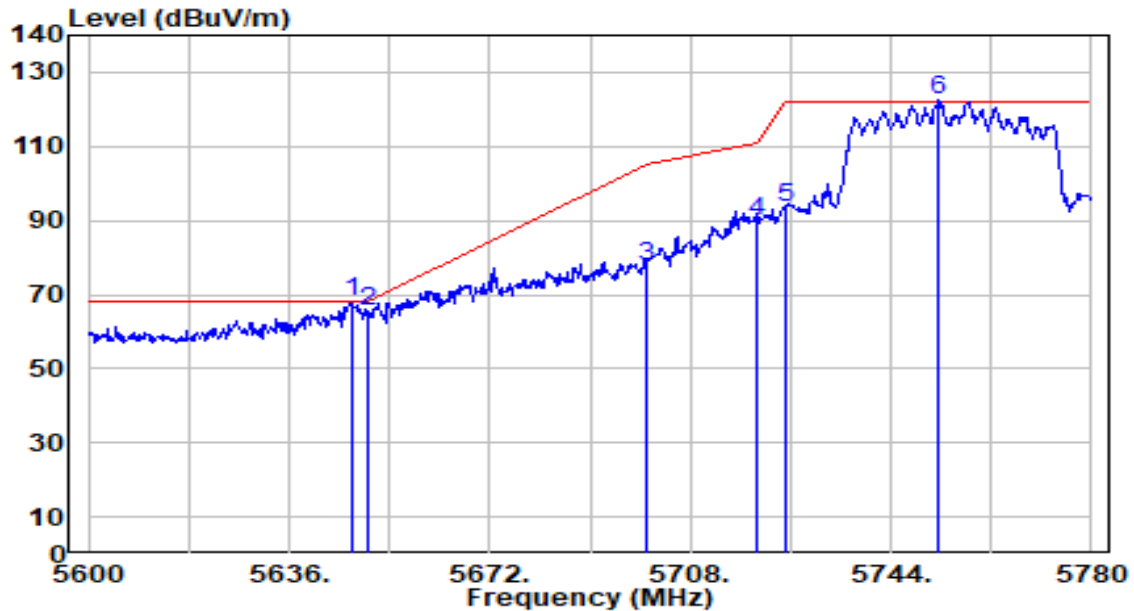


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.340	65.21	2.76	67.97	-0.23	68.20	167	270	Peak
2		5650.000	62.57	2.78	65.35	-2.85	68.20	167	270	Peak
3		5700.000	74.50	3.02	77.52	-27.68	105.20	167	270	Peak
4		5720.000	86.82	3.12	89.94	-20.86	110.80	167	270	Peak
5		5725.000	90.14	3.14	93.28	-28.92	122.20	167	270	Peak
6		5752.640	119.41	3.28	122.69	N/A	N/A	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

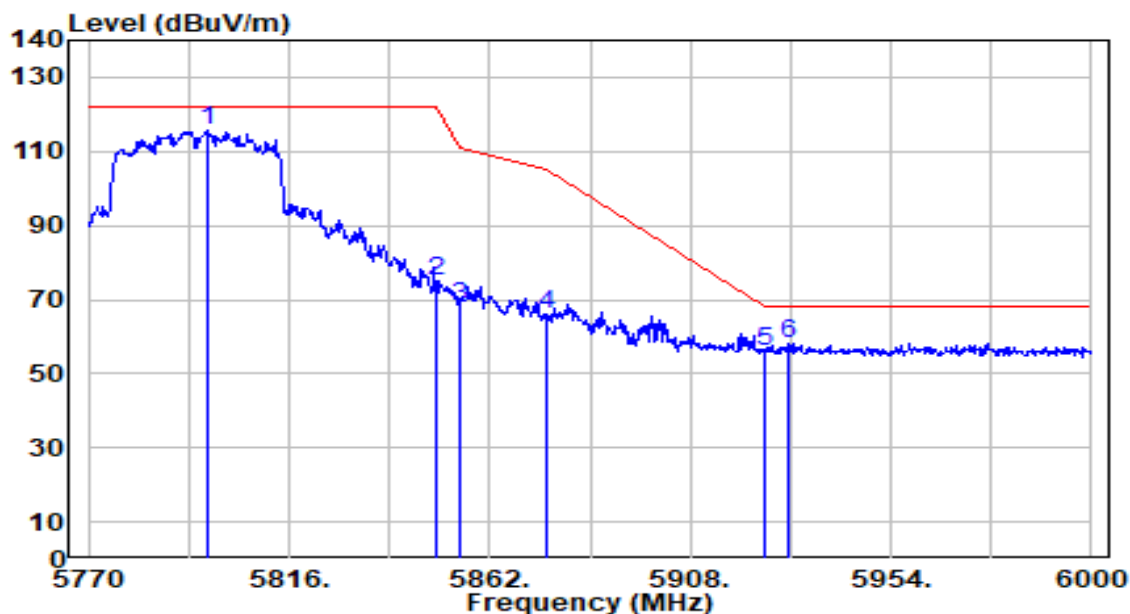


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5797.370	112.41	3.50	115.91	N/A	N/A	182	305	Peak
2	5850.000	71.43	3.51	74.94	-47.26	122.20	182	305	Peak
3	5855.000	64.74	3.51	68.25	-42.56	110.80	182	305	Peak
4	5875.000	62.51	3.50	66.01	-39.19	105.20	182	305	Peak
5	5925.000	52.40	3.51	55.91	-12.29	68.20	182	305	Peak
6	* 5930.310	54.79	3.51	58.30	-9.90	68.20	182	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1+2	Test Voltage	AC 120V/60Hz

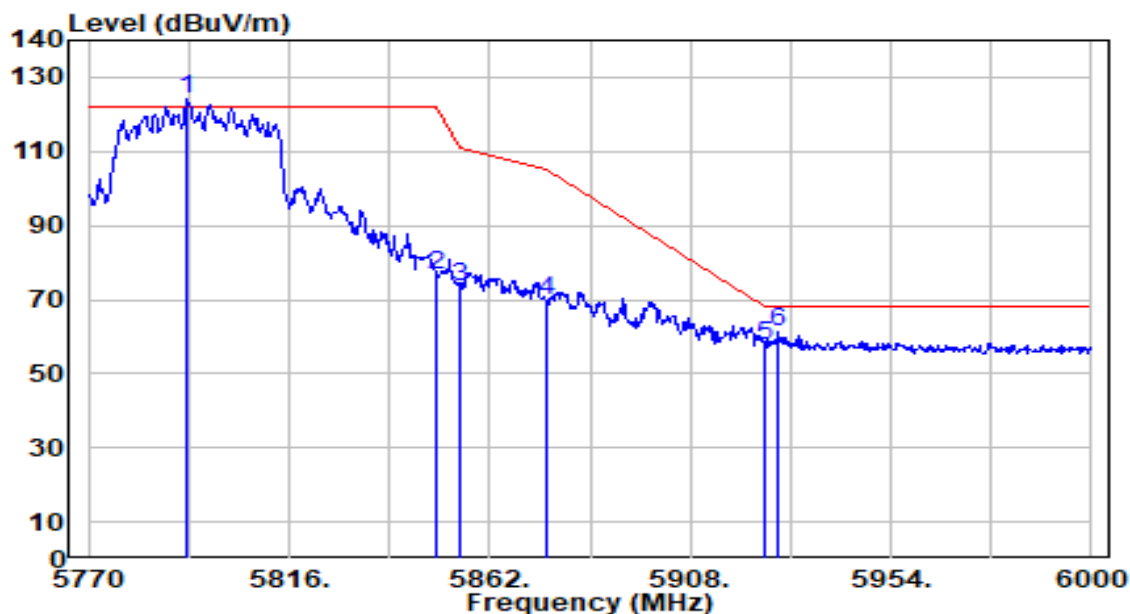


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.770	120.87	3.48	124.34	N/A	N/A	184	273	Peak
2	5850.000	73.34	3.51	76.85	-45.35	122.20	184	273	Peak
3	5855.000	70.04	3.51	73.55	-37.25	110.80	184	273	Peak
4	5875.000	65.98	3.50	69.49	-35.71	105.20	184	273	Peak
5	5925.000	53.97	3.51	57.48	-10.72	68.20	184	273	Peak
6	* 5928.010	57.59	3.51	61.10	-7.10	68.20	184	273	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

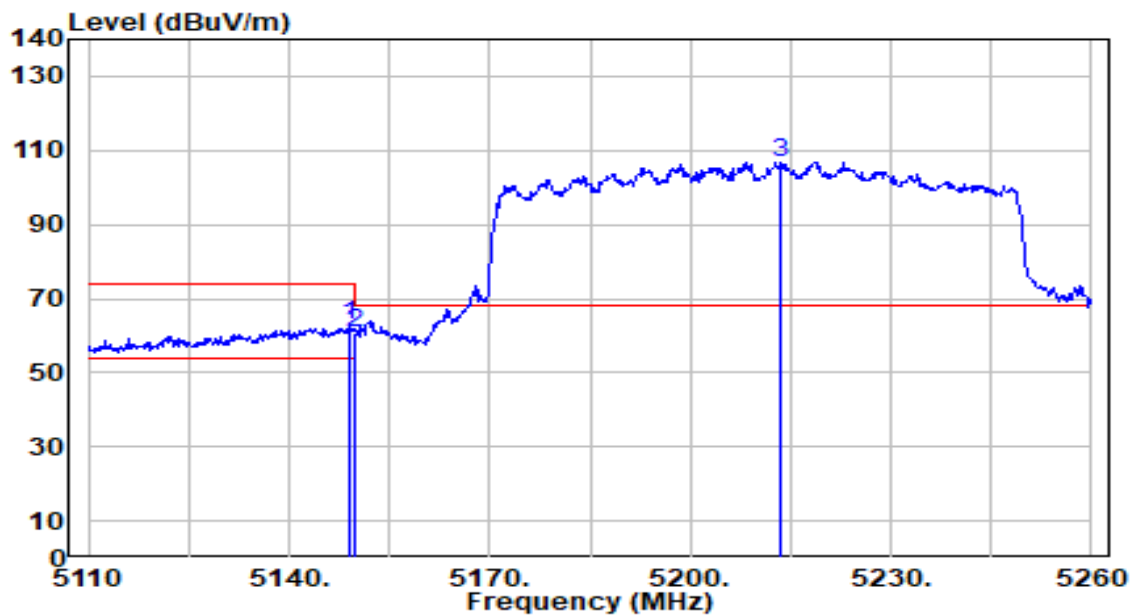


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.000	60.84	1.82	62.66	-11.34	74.00	143	343	Peak
2		5150.000	58.83	1.82	60.65	-13.35	74.00	143	343	Peak
3		5213.500	105.04	1.88	106.92	N/A	N/A	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

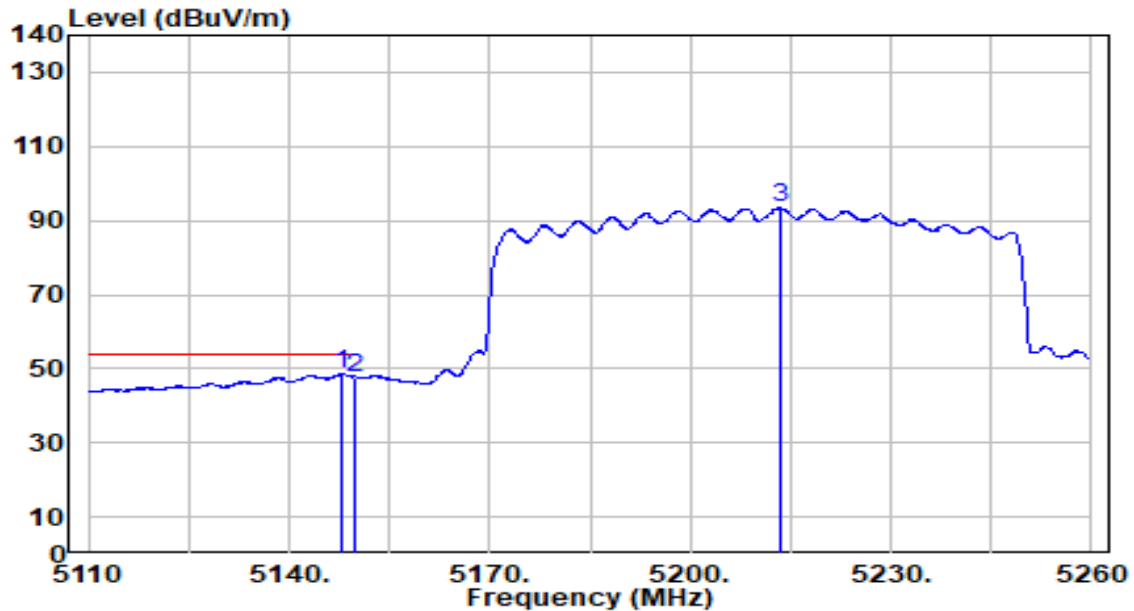


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	46.70	1.82	48.51	-5.49	54.00	143	343	Average
2		5150.000	45.93	1.82	47.75	-6.25	54.00	143	343	Average
3		5213.650	91.63	1.88	93.51	N/A	N/A	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

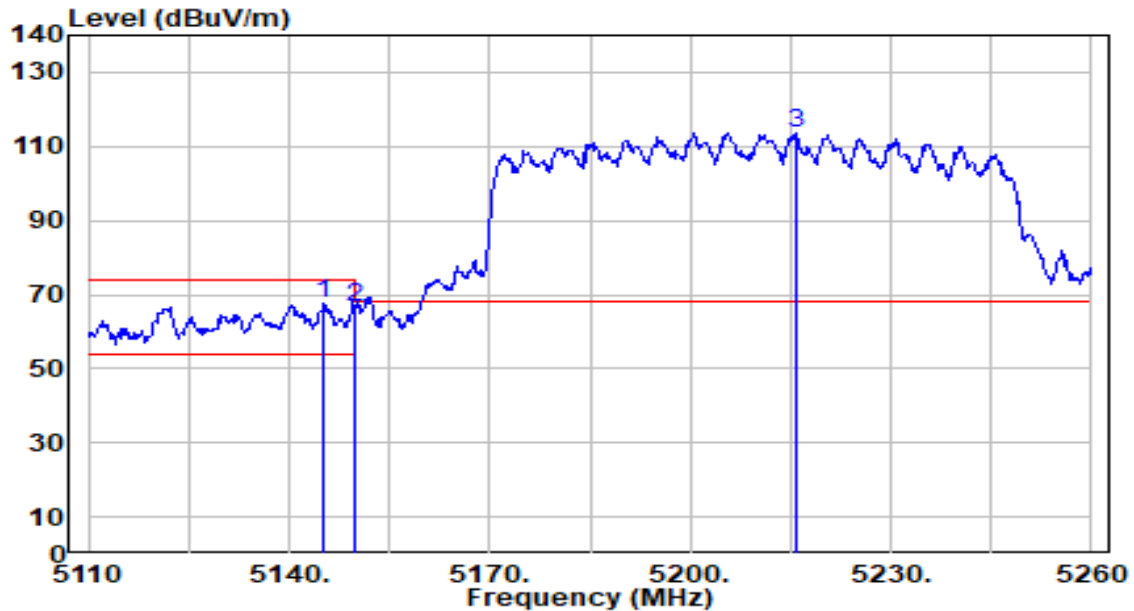


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.250	65.87	1.81	67.68	-6.32	74.00	195	159	Peak
2		5150.000	64.96	1.82	66.78	-7.22	74.00	195	159	Peak
3		5215.900	111.57	1.88	113.45	N/A	N/A	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1+2	Test Voltage	AC 120V/60Hz

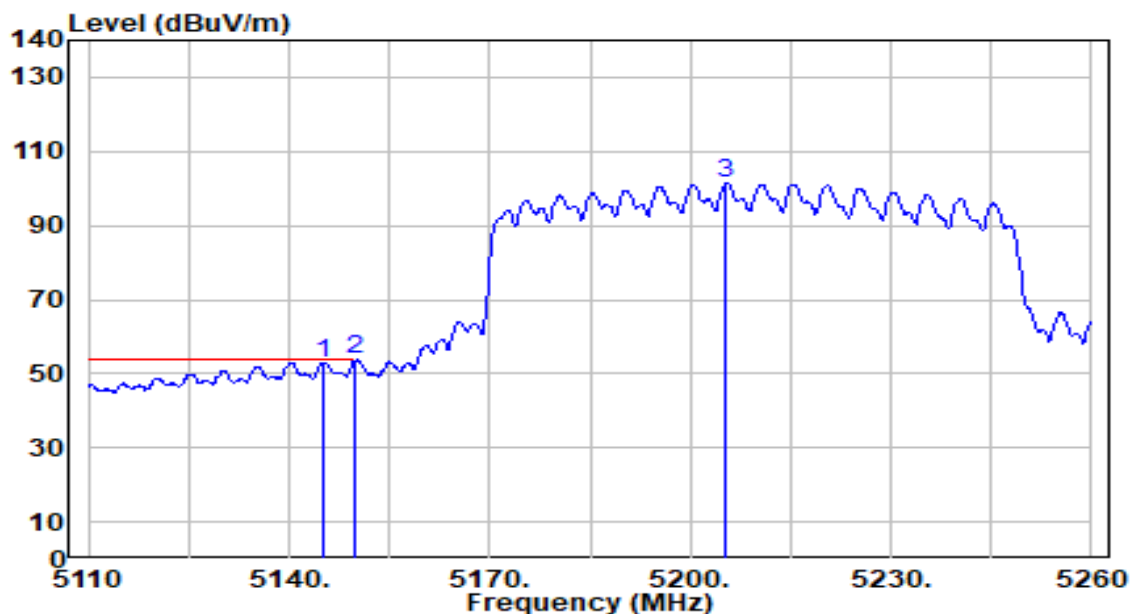


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5145.250	51.21	1.81	53.02	-0.98	54.00	195	159	Average
2	*	5150.000	51.97	1.82	53.79	-0.21	54.00	195	159	Average
3		5205.400	99.54	1.89	101.44	N/A	N/A	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

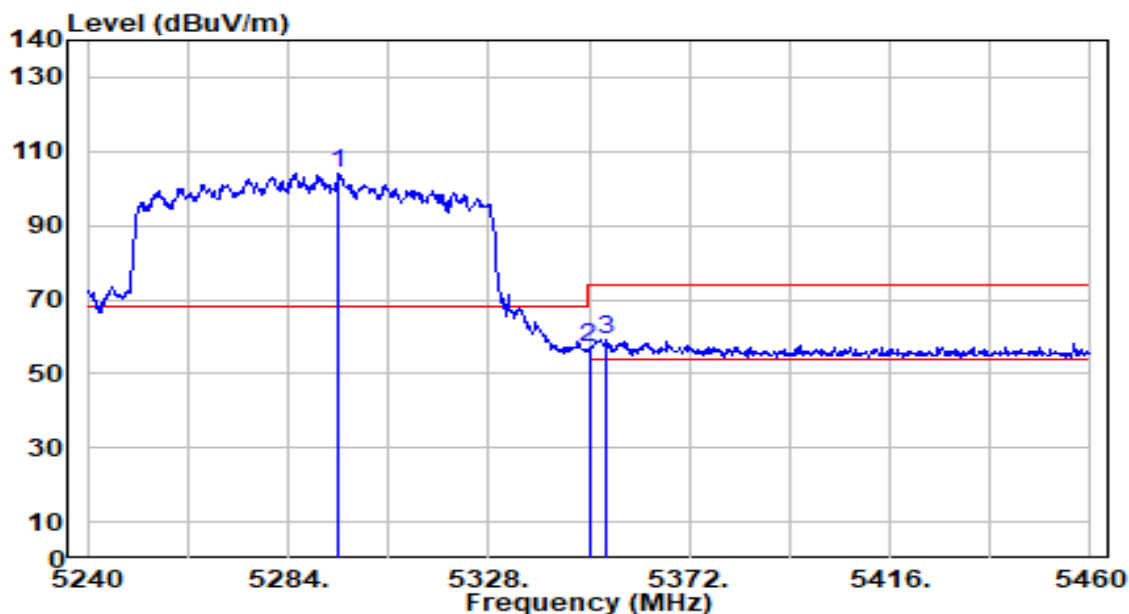


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5295.220	102.55	1.76	104.31	N/A	N/A	190	277	Peak
2	5350.000	55.23	1.69	56.92	-17.08	74.00	190	277	Peak
3	* 5353.520	57.58	1.69	59.27	-14.73	74.00	190	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

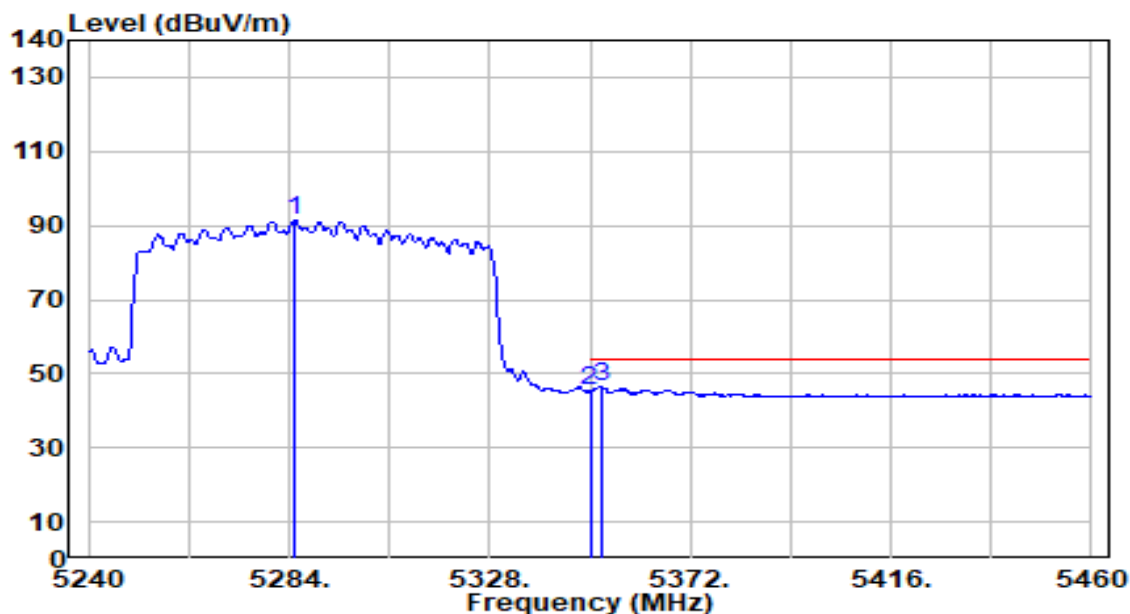


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5285.100	89.78	1.78	91.56	N/A	N/A	190	277	Average
2	5350.000	43.55	1.69	45.24	-8.76	54.00	190	277	Average
3	* 5352.640	44.87	1.69	46.56	-7.44	54.00	190	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

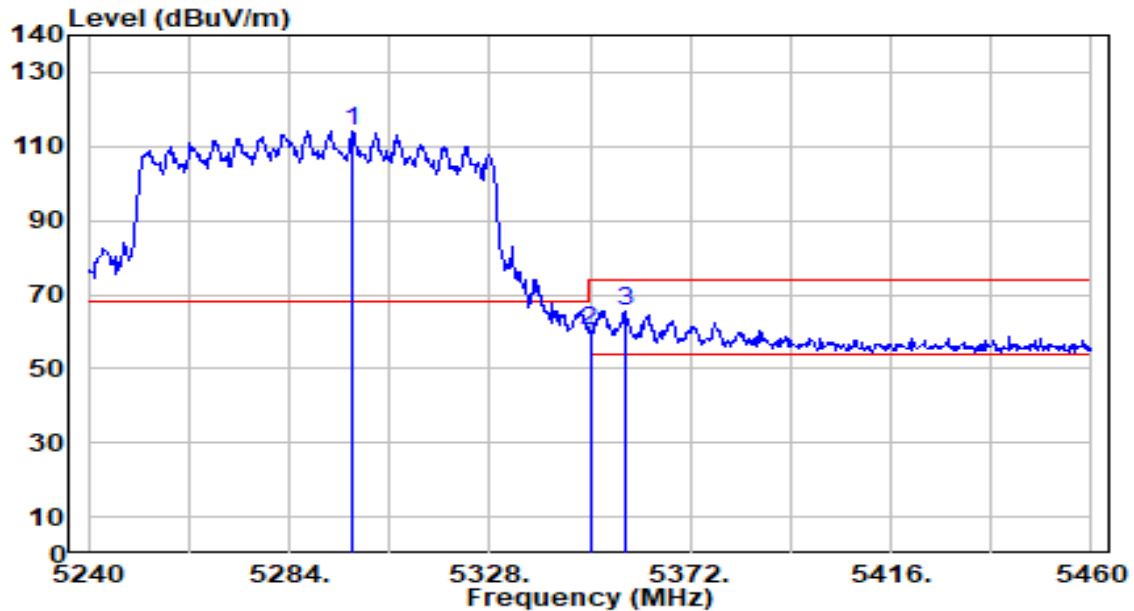


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.080	112.58	1.76	114.34	N/A	N/A	192	247	Peak
2	5350.000	58.74	1.69	60.43	-13.57	74.00	192	247	Peak
3	* 5357.700	64.01	1.68	65.69	-8.31	74.00	192	247	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1+2	Test Voltage	AC 120V/60Hz

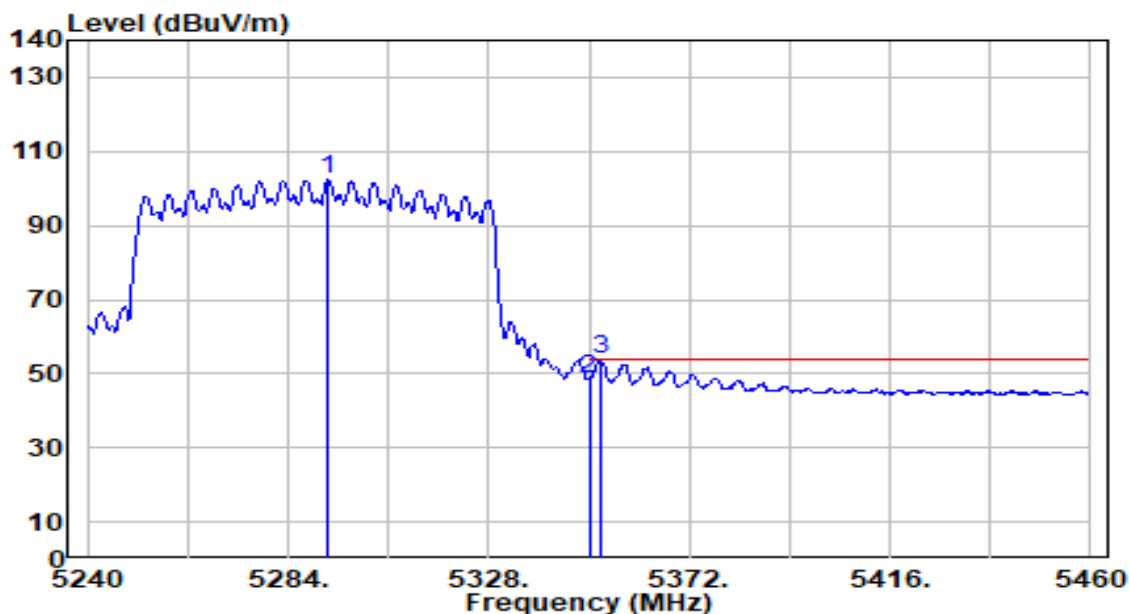


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.800	100.47	1.77	102.24	N/A	N/A	192	247	Average
2	5350.000	46.95	1.69	48.64	-5.36	54.00	192	247	Average
3	* 5352.420	52.03	1.69	53.72	-0.28	54.00	192	247	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

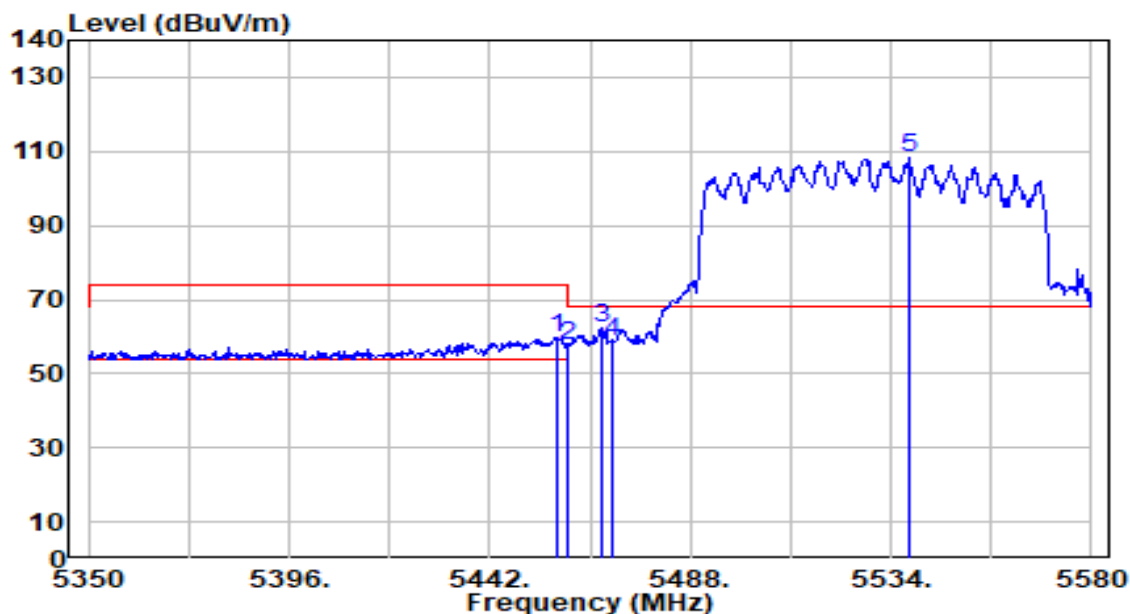


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.410	57.95	1.86	59.81	-14.19	74.00	213	305	Peak
2	5460.000	55.52	1.87	57.40	-16.60	74.00	213	305	Peak
3	* 5467.760	60.27	1.91	62.18	-6.02	68.20	213	305	Peak
4	5470.000	56.57	1.92	58.48	-9.72	68.20	213	305	Peak
5	5538.140	106.09	2.23	108.32	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

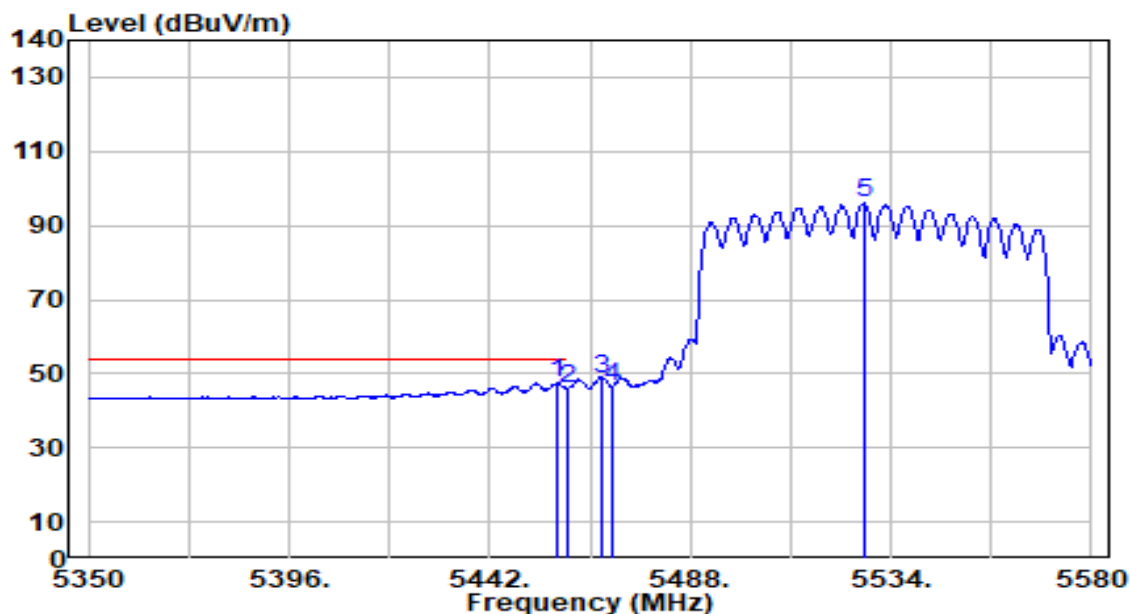


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.410	45.69	1.86	47.55	-6.45	54.00	213	305	Average
2		5460.000	43.99	1.87	45.86	-8.14	54.00	213	305	Average
3		5467.760	46.84	1.91	48.75	N/A	N/A	213	305	Average
4		5470.000	44.60	1.92	46.51	N/A	N/A	213	305	Average
5		5528.020	93.80	2.18	95.98	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

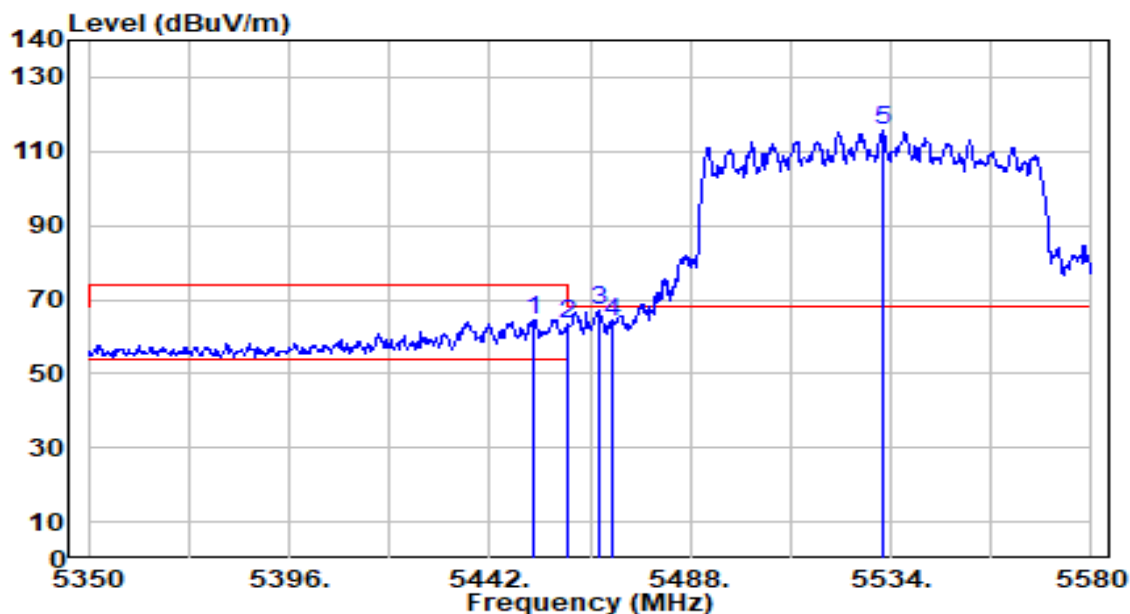


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.120	62.83	1.84	64.68	-9.32	74.00	270	277	Peak
2	5460.000	61.51	1.87	63.39	-10.61	74.00	270	277	Peak
3	* 5466.840	65.39	1.90	67.29	-0.91	68.20	270	277	Peak
4	5470.000	61.87	1.92	63.78	-4.42	68.20	270	277	Peak
5	5531.930	113.73	2.20	115.93	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1+2	Test Voltage	AC 120V/60Hz

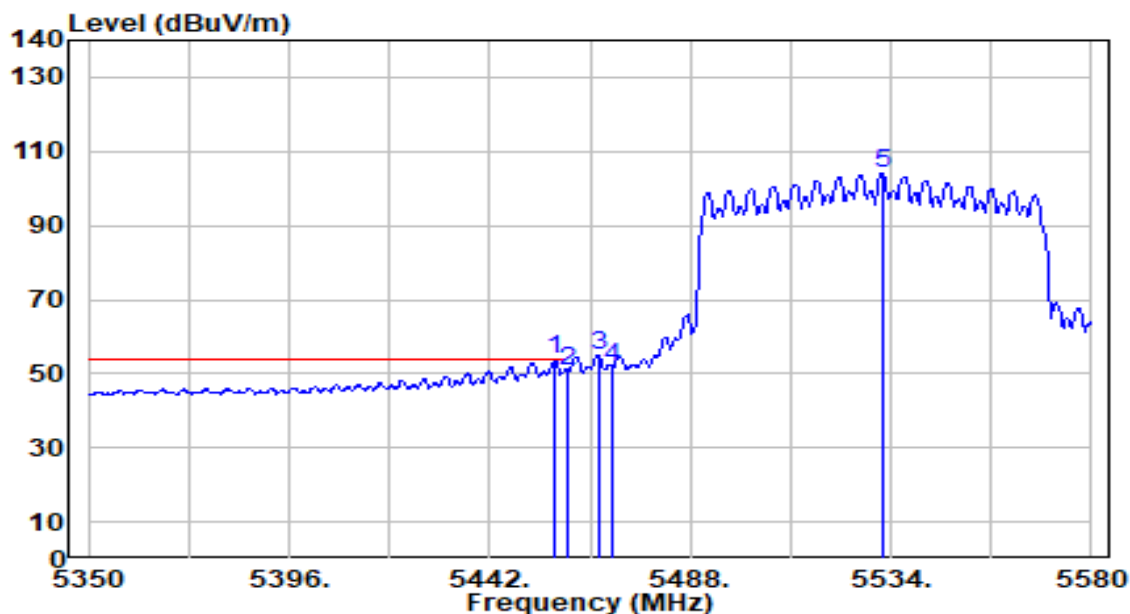


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.720	51.86	1.86	53.72	-0.28	54.00	270	277	Average
2		5460.000	49.04	1.87	50.91	-3.09	54.00	270	277	Average
3		5466.840	53.07	1.90	54.97	N/A	N/A	270	277	Average
4		5470.000	50.09	1.92	52.00	N/A	N/A	270	277	Average
5		5532.160	101.82	2.20	104.02	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

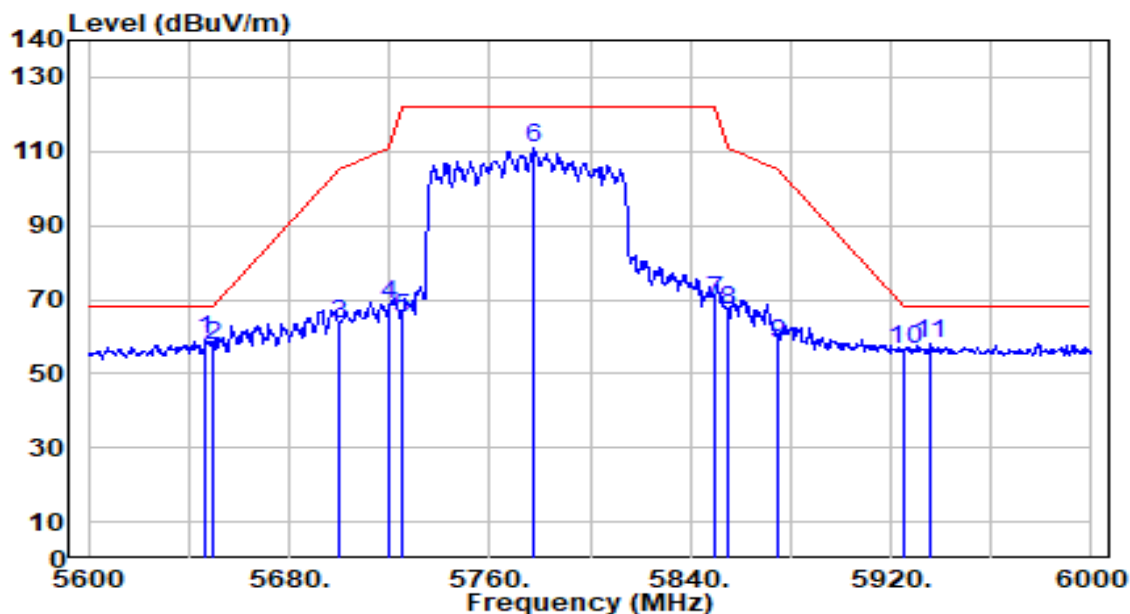


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.400	56.50	2.76	59.26	-8.94	68.20	194	304	Peak
2		5650.000	54.67	2.78	57.45	-10.75	68.20	194	304	Peak
3		5700.000	60.18	3.02	63.20	-42.00	105.20	194	304	Peak
4		5720.000	65.42	3.12	68.53	-42.27	110.80	194	304	Peak
5		5725.000	61.89	3.14	65.03	-57.17	122.20	194	304	Peak
6		5777.600	107.28	3.40	110.68	N/A	N/A	194	304	Peak
7		5850.000	66.08	3.51	69.58	-52.62	122.20	194	304	Peak
8		5855.000	63.52	3.51	67.03	-43.77	110.80	194	304	Peak
9		5875.000	54.54	3.50	58.04	-47.16	105.20	194	304	Peak
10		5925.000	53.02	3.51	56.53	-11.67	68.20	194	304	Peak
11		5935.600	54.66	3.52	58.17	-10.03	68.20	194	304	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1+2	Test Voltage	AC 120V/60Hz

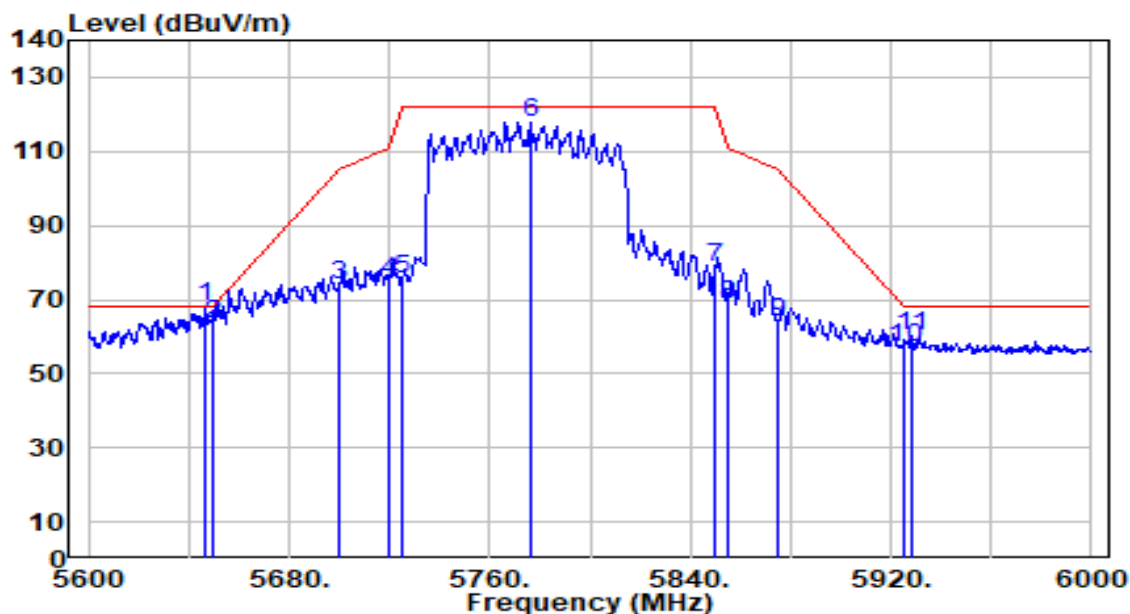


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.400	65.17	2.76	67.93	-0.27	68.20	167	270	Peak
2		5650.000	60.79	2.78	63.56	-4.64	68.20	167	270	Peak
3		5700.000	71.01	3.02	74.02	-31.18	105.20	167	270	Peak
4		5720.000	71.65	3.12	74.76	-36.04	110.80	167	270	Peak
5		5725.000	72.30	3.14	75.44	-46.76	122.20	167	270	Peak
6		5776.400	114.39	3.40	117.78	N/A	N/A	167	270	Peak
7		5850.000	75.35	3.51	78.85	-43.35	122.20	167	270	Peak
8		5855.000	64.95	3.51	68.45	-42.35	110.80	167	270	Peak
9		5875.000	60.22	3.50	63.72	-41.48	105.20	167	270	Peak
10		5925.000	53.47	3.51	56.98	-11.22	68.20	167	270	Peak
11		5928.400	56.94	3.51	60.45	-7.75	68.20	167	270	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

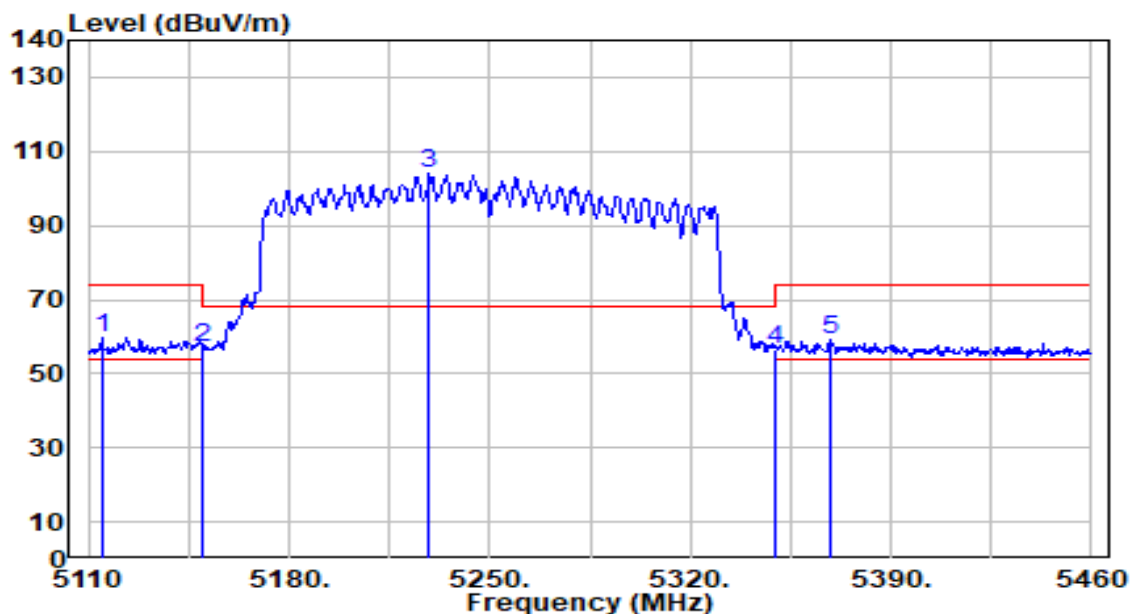


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5114.550	58.00	1.76	59.76	-14.24	74.00	143	343	Peak
2		5150.000	55.47	1.82	57.29	-16.71	74.00	143	343	Peak
3		5229.000	102.38	1.86	104.24	N/A	N/A	143	343	Peak
4		5350.000	54.76	1.69	56.45	-17.55	74.00	143	343	Peak
5		5369.350	57.49	1.67	59.15	-14.85	74.00	143	343	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

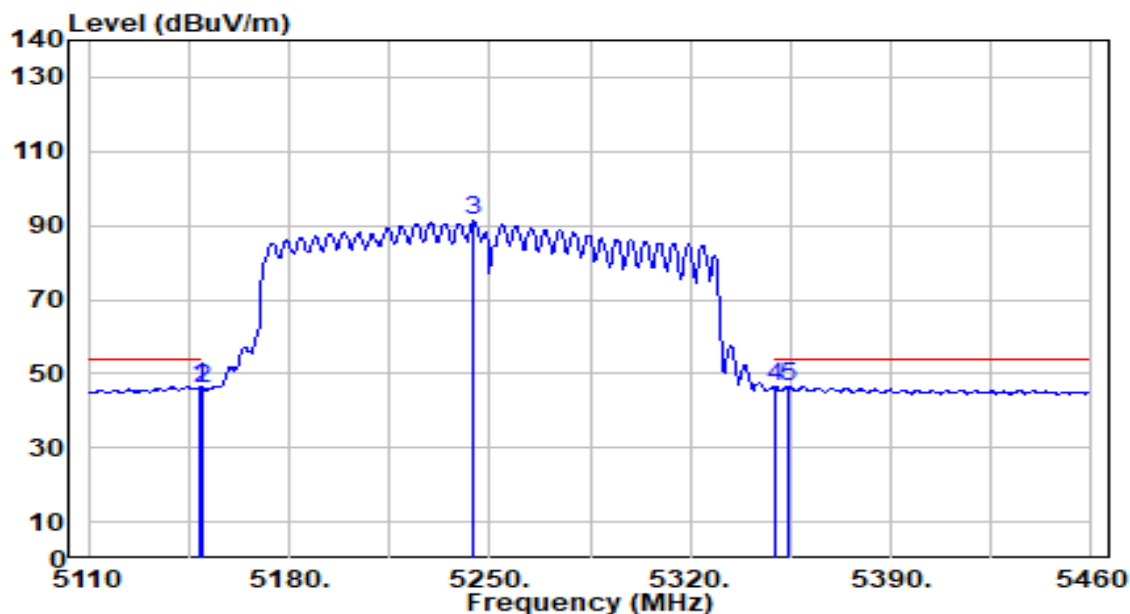


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	44.80	1.82	46.62	-7.38	54.00	143	343	Average
2		5150.000	44.36	1.82	46.18	-7.82	54.00	143	343	Average
3		5244.050	89.47	1.84	91.31	N/A	N/A	143	343	Average
4		5350.000	44.57	1.69	46.26	-7.74	54.00	143	343	Average
5		5353.950	44.92	1.69	46.60	-7.40	54.00	143	343	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

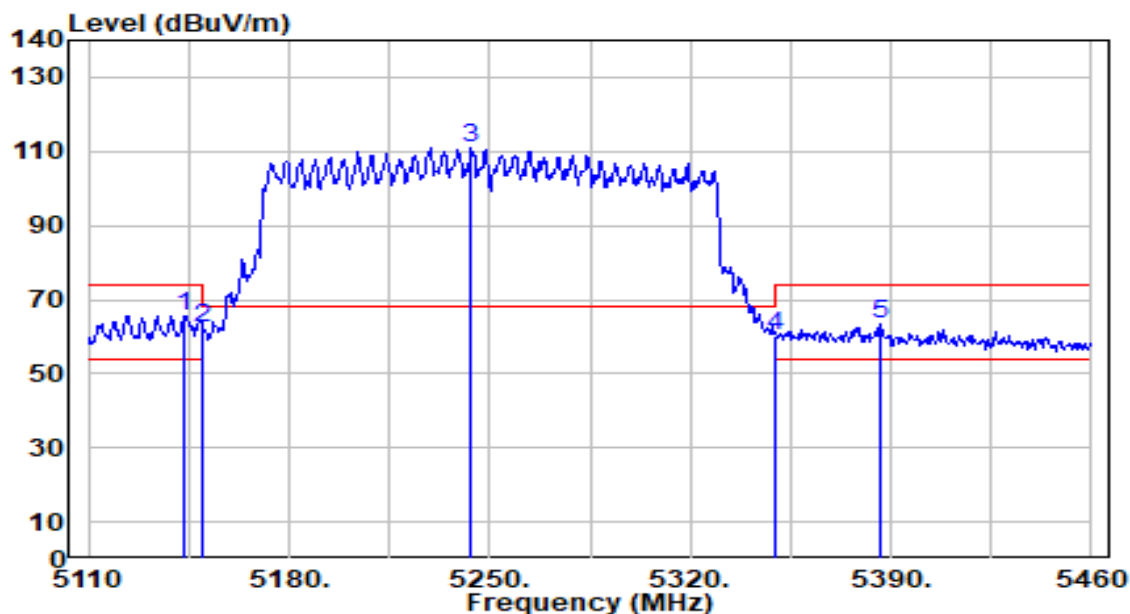


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.250	63.96	1.81	65.76	-8.24	74.00	195	159	Peak
2		5150.000	60.41	1.82	62.23	-11.77	74.00	195	159	Peak
3		5243.700	109.00	1.84	110.84	N/A	N/A	195	159	Peak
4		5350.000	58.27	1.69	59.97	-14.03	74.00	195	159	Peak
5		5386.500	61.97	1.64	63.61	-10.39	74.00	195	159	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-29
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1+2	Test Voltage	AC 120V/60Hz

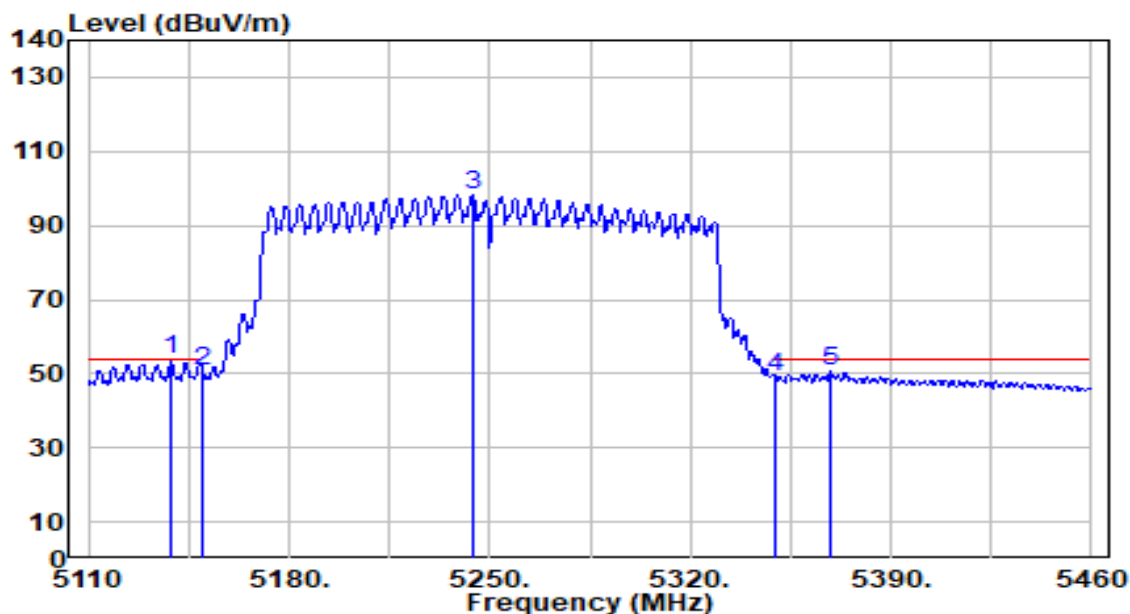


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.050	51.97	1.80	53.77	-0.23	54.00	195	159	Average
2		5150.000	48.67	1.82	50.48	-3.52	54.00	195	159	Average
3		5244.050	96.28	1.84	98.11	N/A	N/A	195	159	Average
4		5350.000	47.19	1.69	48.88	-5.12	54.00	195	159	Average
5		5369.000	49.28	1.67	50.94	-3.06	54.00	195	159	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-30
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

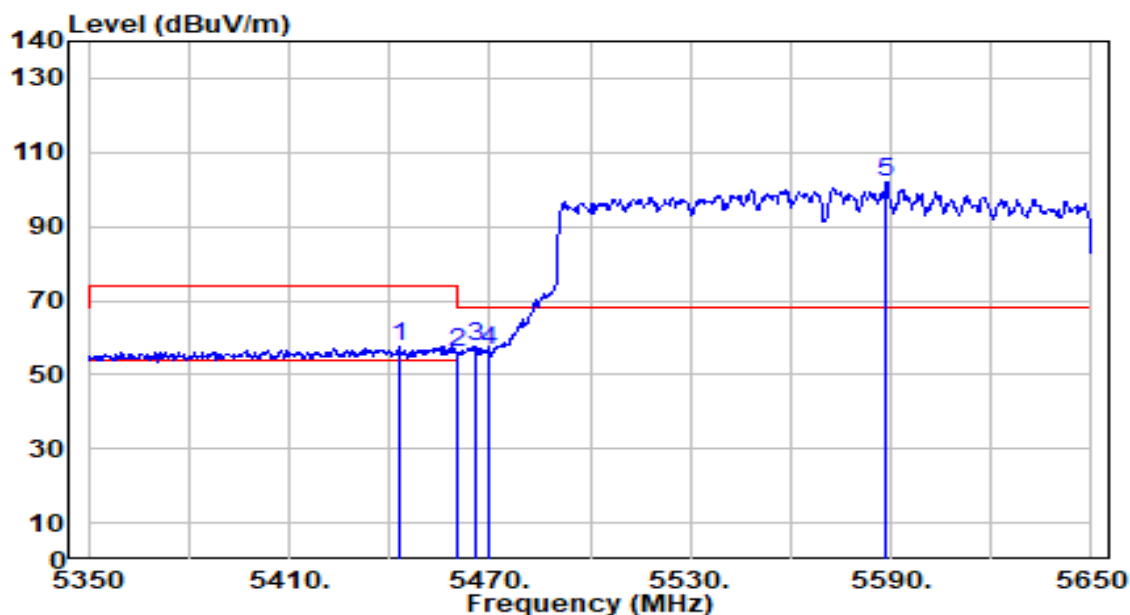


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5442.700	55.85	1.80	57.65	-16.35	74.00	213	305	Peak
2	5460.000	54.17	1.87	56.04	-17.96	74.00	213	305	Peak
3	* 5466.100	55.93	1.90	57.83	-10.37	68.20	213	305	Peak
4	5470.000	54.51	1.92	56.43	-11.77	68.20	213	305	Peak
5	5588.800	99.57	2.48	102.05	N/A	N/A	213	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-30
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

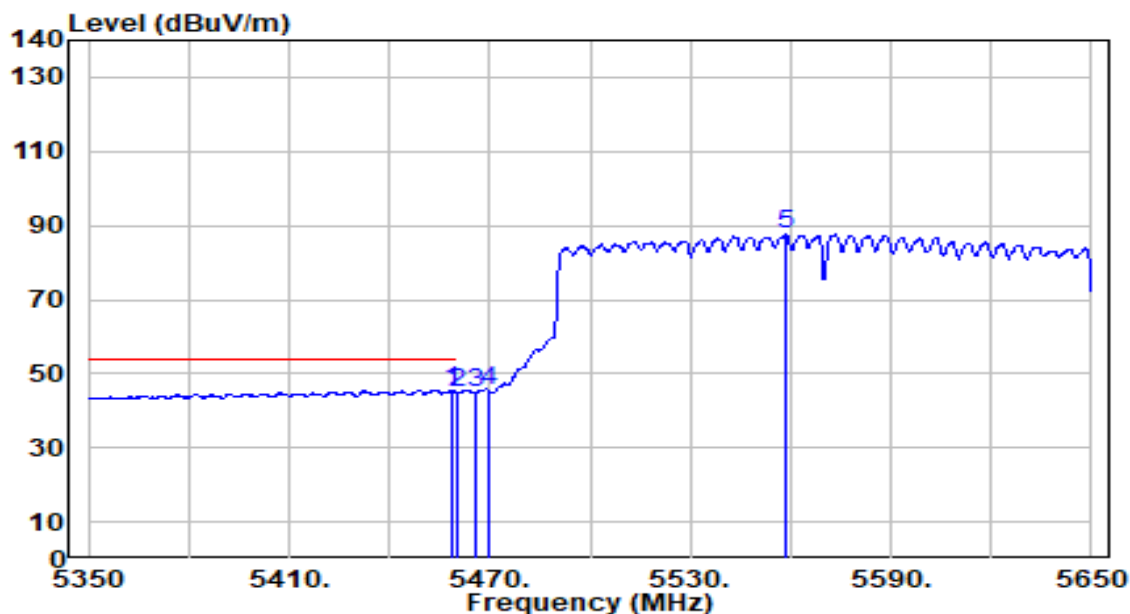


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.600	43.83	1.87	45.70	-8.30	54.00	213	305	Average
2		5460.000	42.98	1.87	44.85	-9.15	54.00	213	305	Average
3		5466.100	43.11	1.90	45.01	N/A	N/A	213	305	Average
4		5470.000	43.34	1.92	45.26	N/A	N/A	213	305	Average
5		5558.500	85.32	2.33	87.65	N/A	N/A	213	305	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-30
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

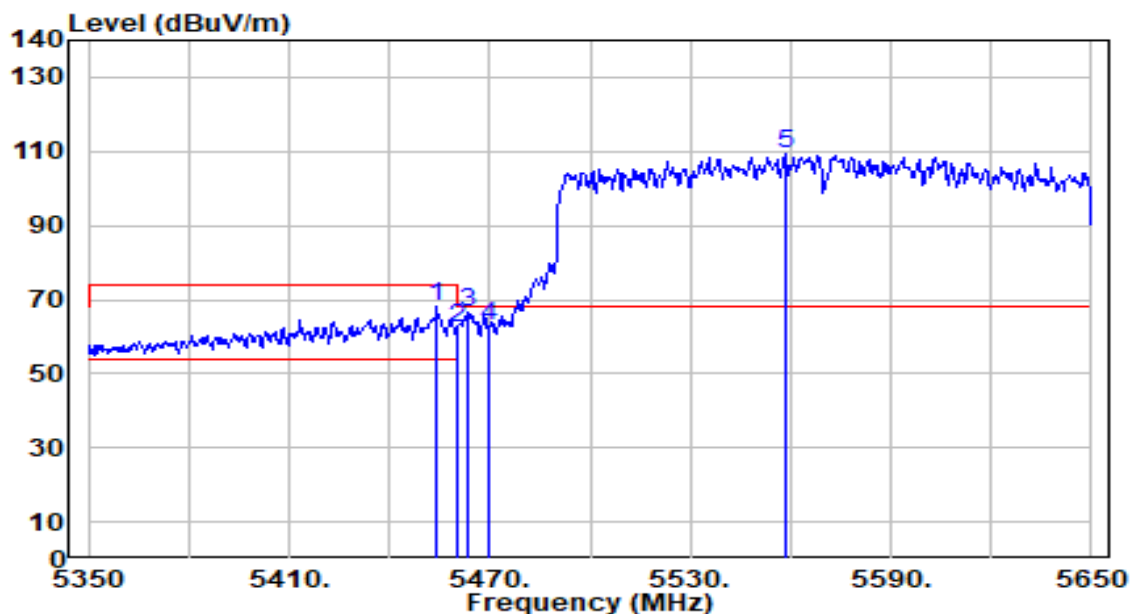


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.100	66.12	1.85	67.97	-6.03	74.00	270	277	Peak
2	5460.000	60.39	1.87	62.26	-11.74	74.00	270	277	Peak
3	* 5463.400	64.44	1.89	66.32	-1.88	68.20	270	277	Peak
4	5470.000	60.79	1.92	62.71	-5.49	68.20	270	277	Peak
5	5558.200	106.95	2.33	109.28	N/A	N/A	270	277	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-04-30
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1+2	Test Voltage	AC 120V/60Hz

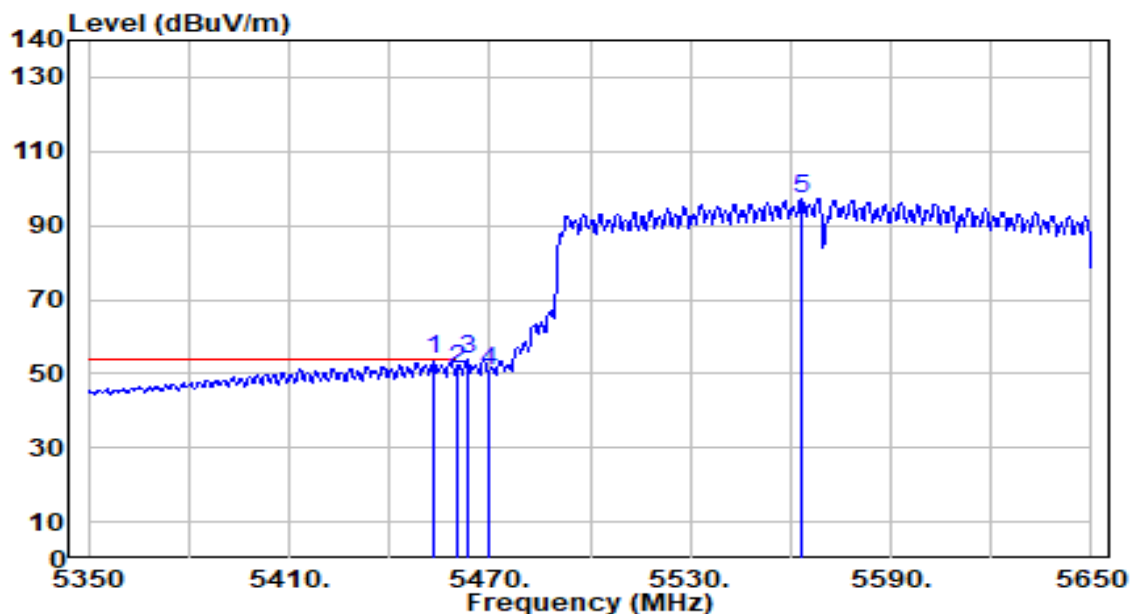


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.200	51.89	1.85	53.73	-0.27	54.00	270	277	Average
2		5460.000	49.33	1.87	51.21	-2.79	54.00	270	277	Average
3		5463.400	51.87	1.89	53.76	N/A	N/A	270	277	Average
4		5470.000	48.89	1.92	50.81	N/A	N/A	270	277	Average
5		5563.300	94.89	2.36	97.25	N/A	N/A	270	277	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

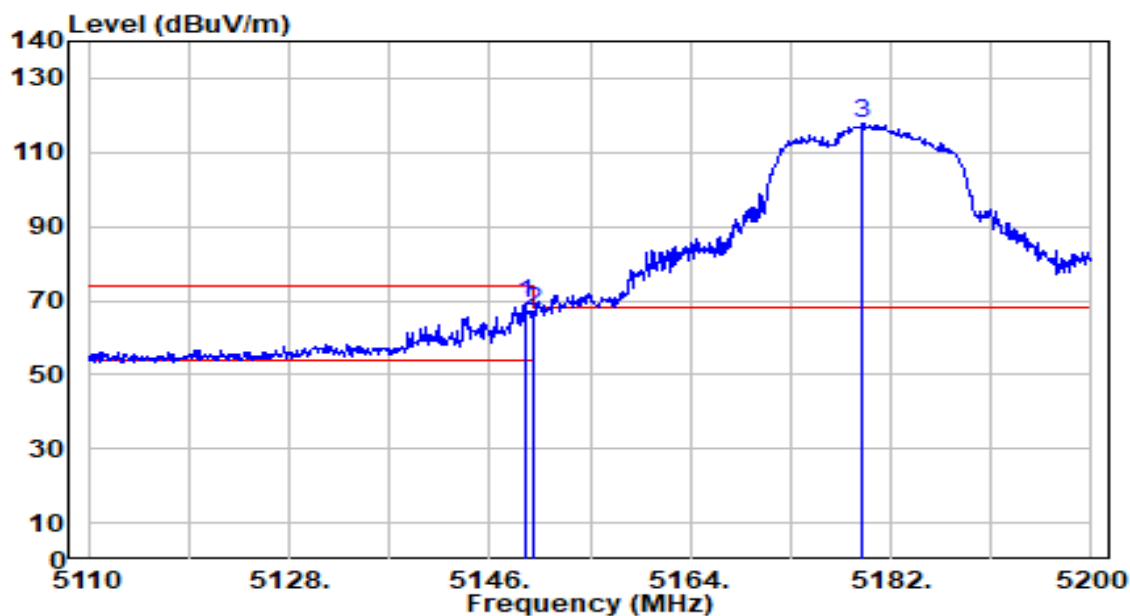


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.240	67.57	1.82	69.39	-4.61	74.00	281	6	Peak
2		5150.000	65.53	1.82	67.34	-6.66	74.00	281	6	Peak
3		5179.480	116.08	1.87	117.95	N/A	N/A	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

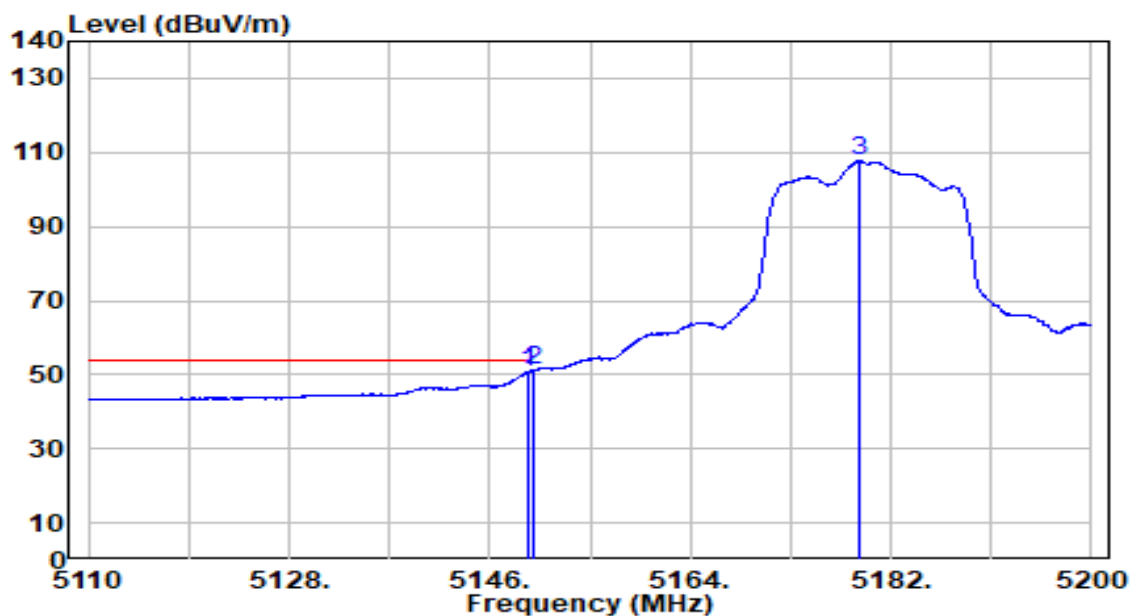


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	48.99	1.82	50.81	-3.19	54.00	281	6	Average
2	*	5150.000	49.47	1.82	51.29	-2.71	54.00	281	6	Average
3		5179.120	105.73	1.87	107.60	N/A	N/A	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

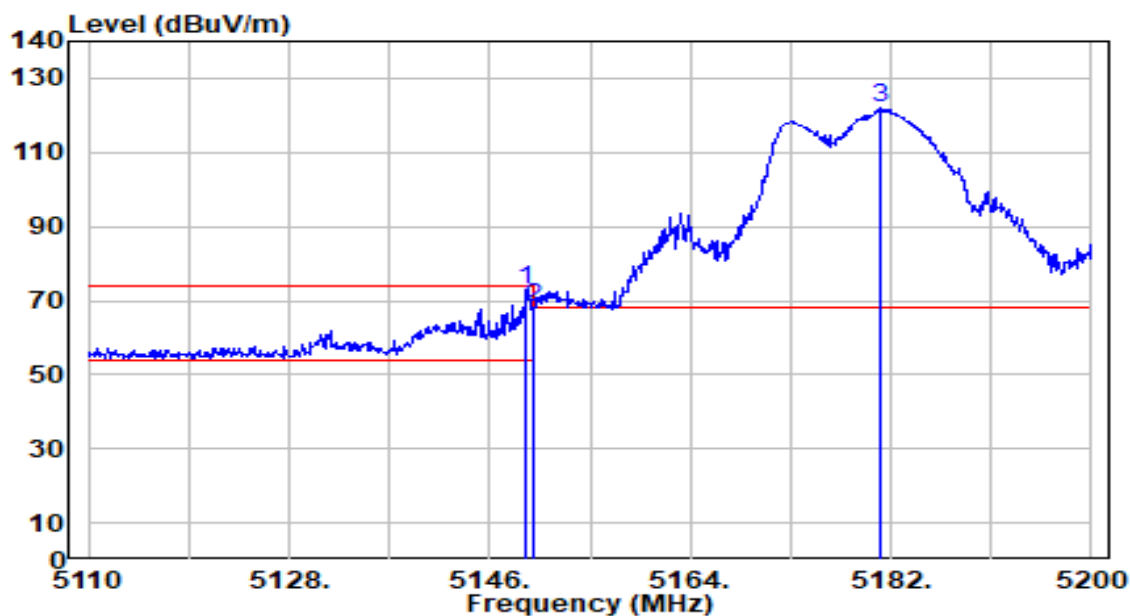


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.330	71.09	1.82	72.91	-1.09	74.00	136	248	Peak
2		5150.000	66.32	1.82	68.14	-5.86	74.00	136	248	Peak
3		5181.010	120.00	1.87	121.87	N/A	N/A	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

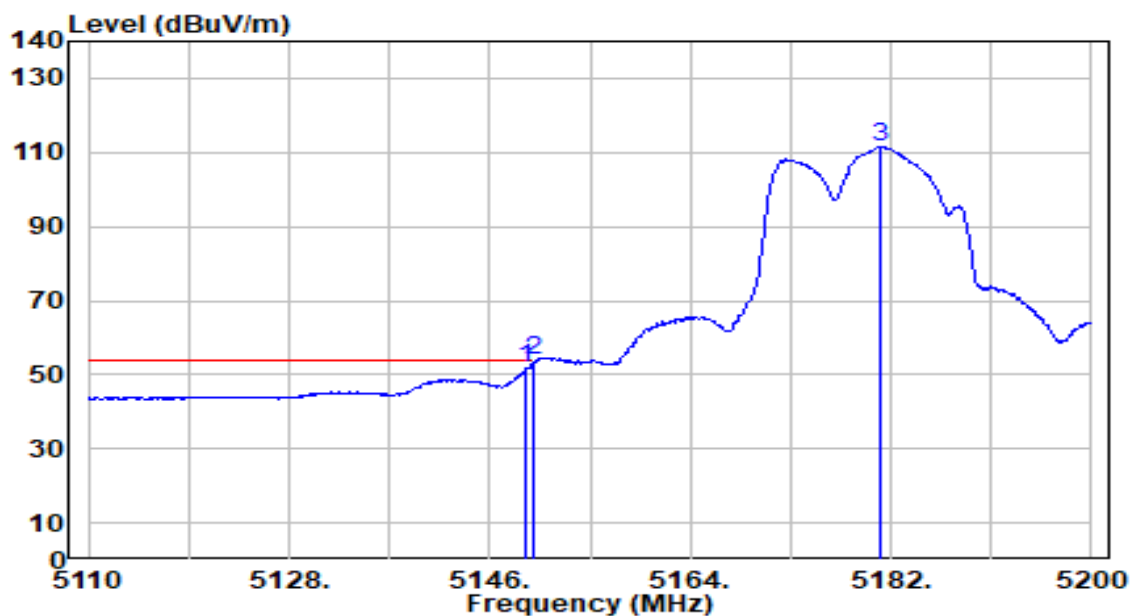


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.330	49.81	1.82	51.63	-2.37	54.00	136	248	Average
2	*	5150.000	51.96	1.82	53.78	-0.22	54.00	136	248	Average
3		5181.100	109.64	1.87	111.51	N/A	N/A	136	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

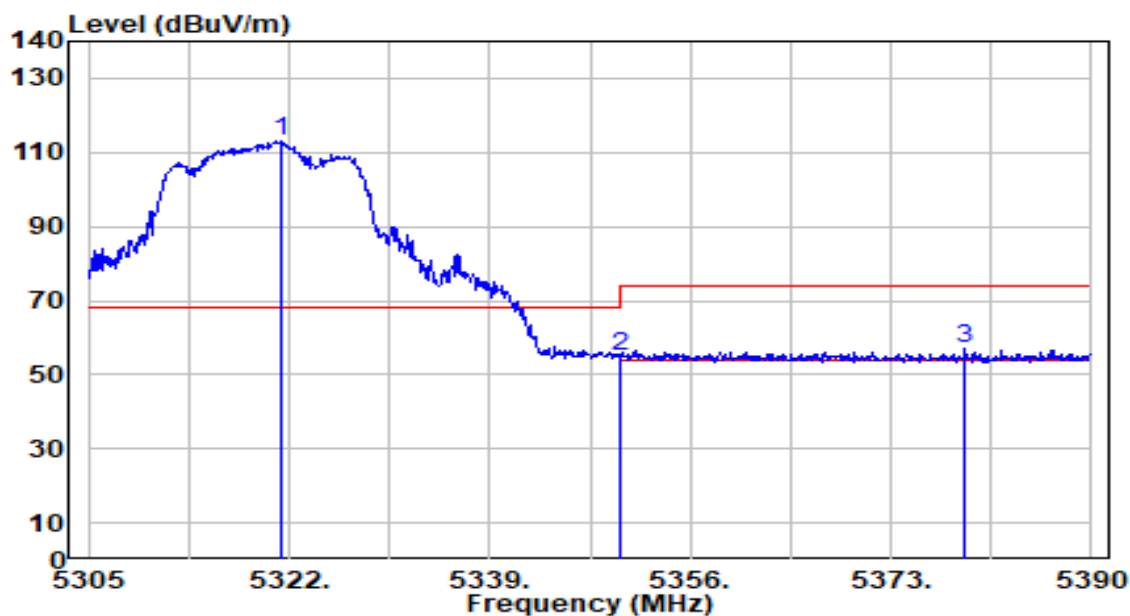


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.405	111.19	1.73	112.92	N/A	N/A	288	1	Peak
2	5350.000	53.34	1.69	55.03	-18.97	74.00	288	1	Peak
3	* 5379.290	55.16	1.65	56.81	-17.19	74.00	288	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

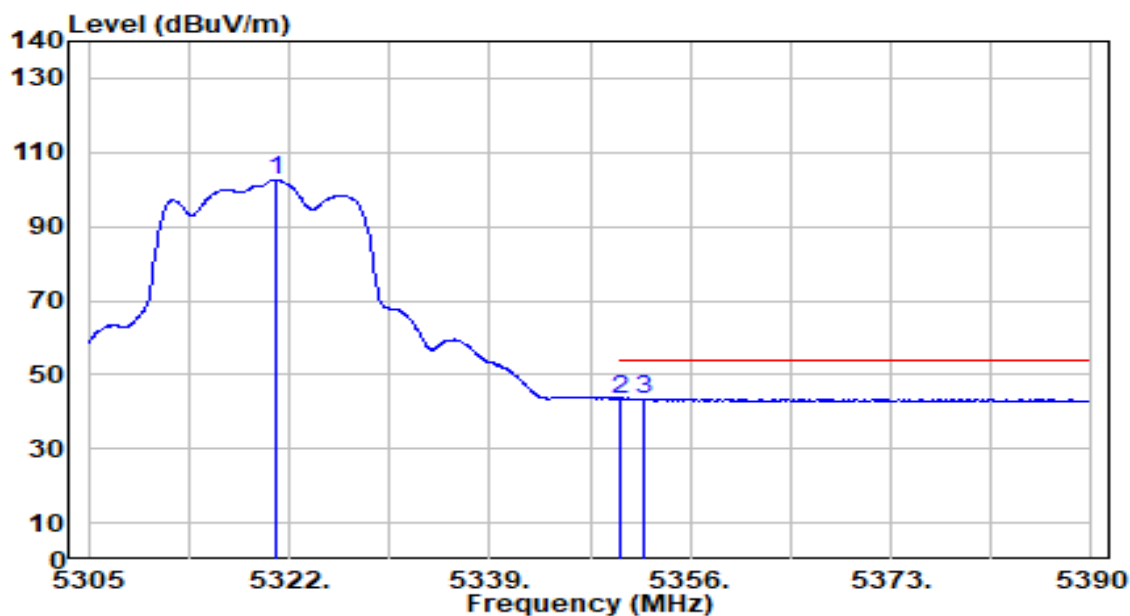


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5320.810	100.95	1.73	102.68	N/A	N/A	288	1	Average
2	5350.000	41.87	1.69	43.56	-10.44	54.00	288	1	Average
3	* 5352.175	41.88	1.69	43.57	-10.43	54.00	288	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

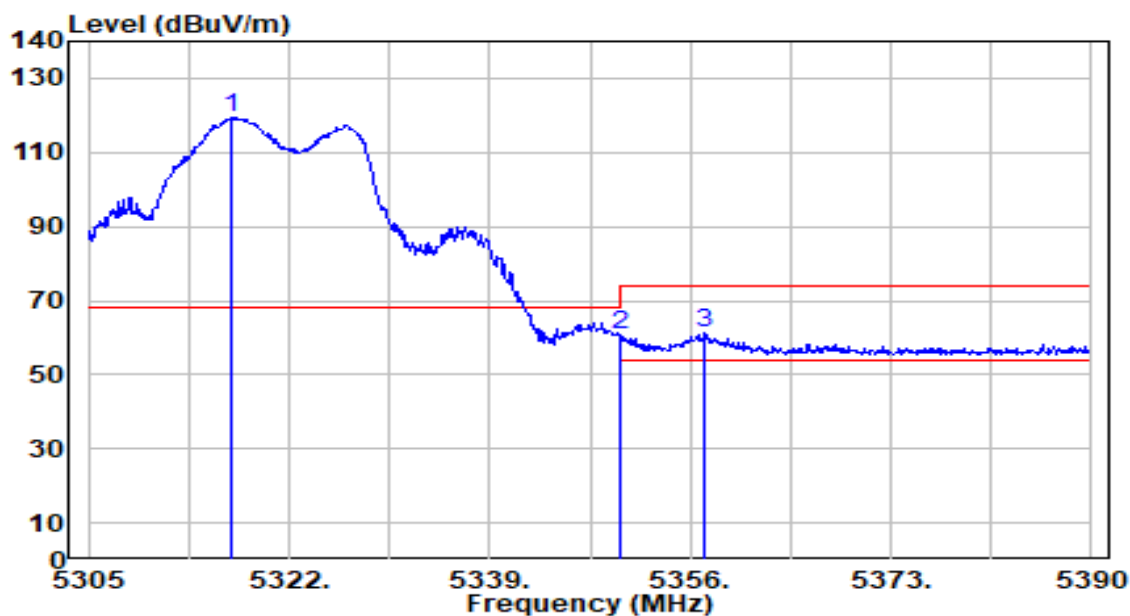


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.070	117.85	1.74	119.58	N/A	N/A	173	151	Peak
2	5350.000	58.93	1.69	60.62	-13.38	74.00	173	151	Peak
3	* 5357.190	59.45	1.68	61.13	-12.87	74.00	173	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

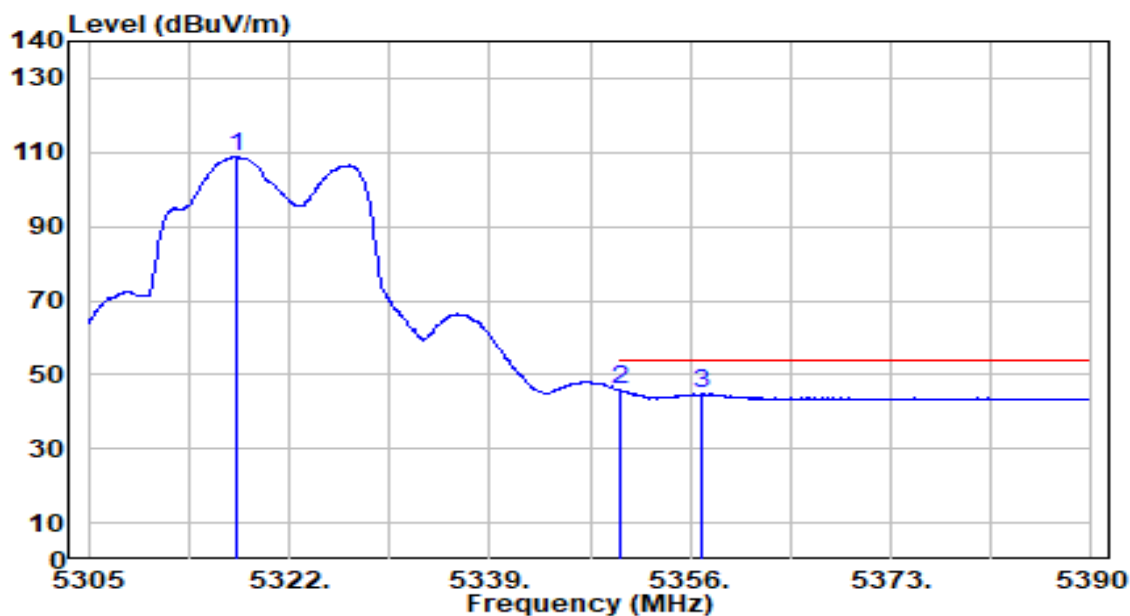


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5317.495	107.10	1.73	108.84	N/A	N/A	173	151	Average
2	*	5350.000	44.25	1.69	45.95	-8.05	54.00	173	151	Average
3		5356.935	43.17	1.68	44.85	-9.15	54.00	173	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

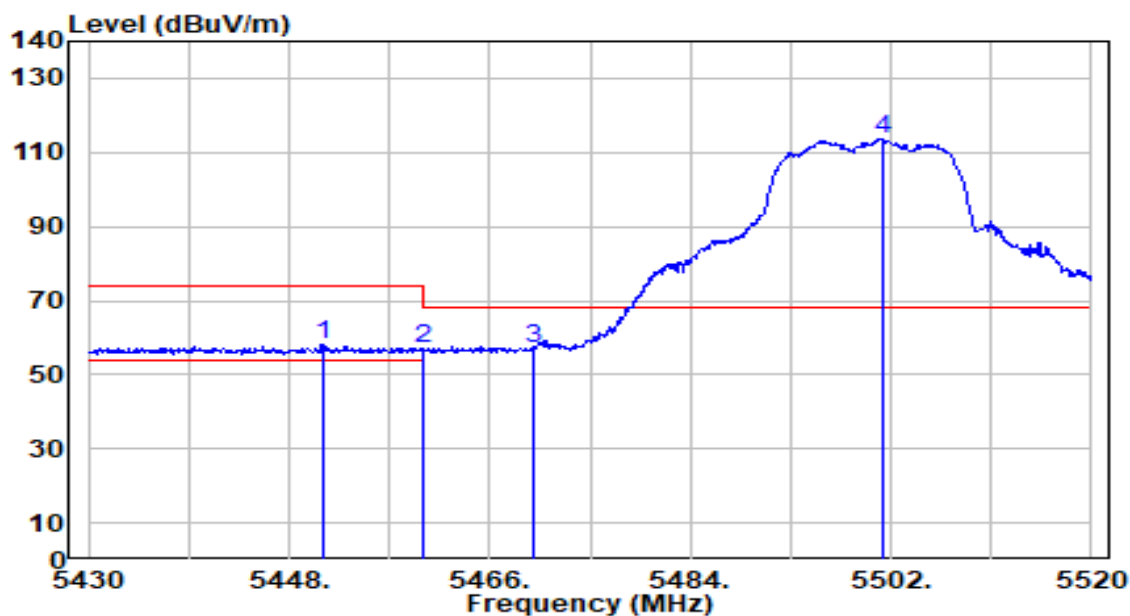


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.970	56.21	1.84	58.05	-15.95	74.00	208	206	Peak
2	5460.000	55.19	1.87	57.06	-16.94	74.00	208	206	Peak
3	* 5470.000	54.94	1.92	56.85	-11.35	68.20	208	206	Peak
4	5501.280	111.38	2.05	113.43	N/A	N/A	208	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

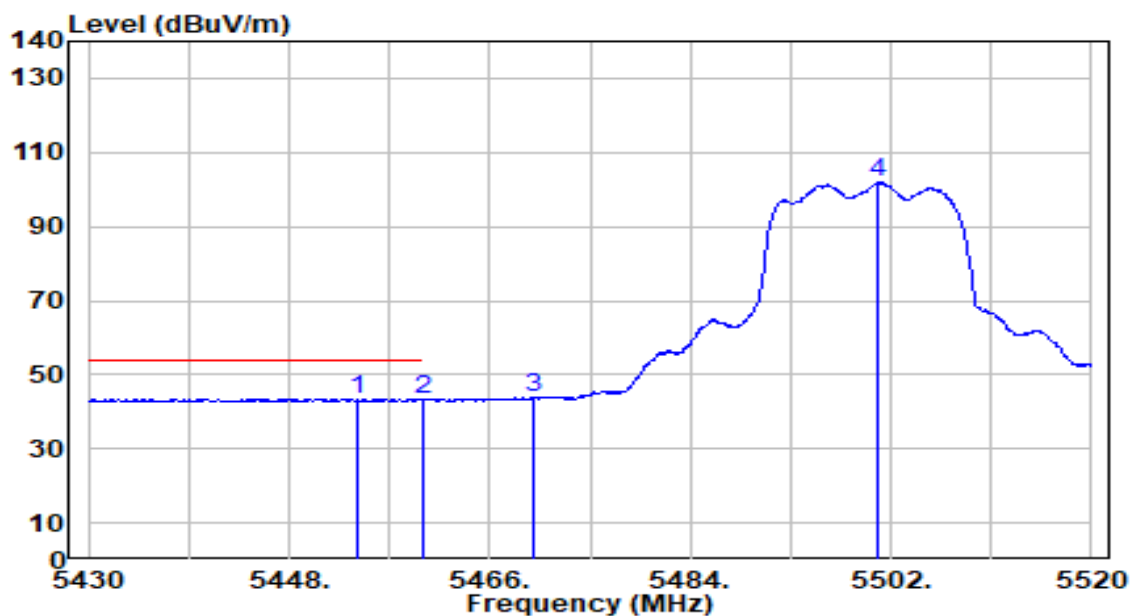


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.120	41.74	1.85	43.58	-10.42	54.00	208	206	Average
2		5460.000	41.45	1.87	43.32	-10.68	54.00	208	206	Average
3		5470.000	41.70	1.92	43.62	N/A	N/A	208	206	Average
4		5500.920	99.92	2.04	101.96	N/A	N/A	208	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

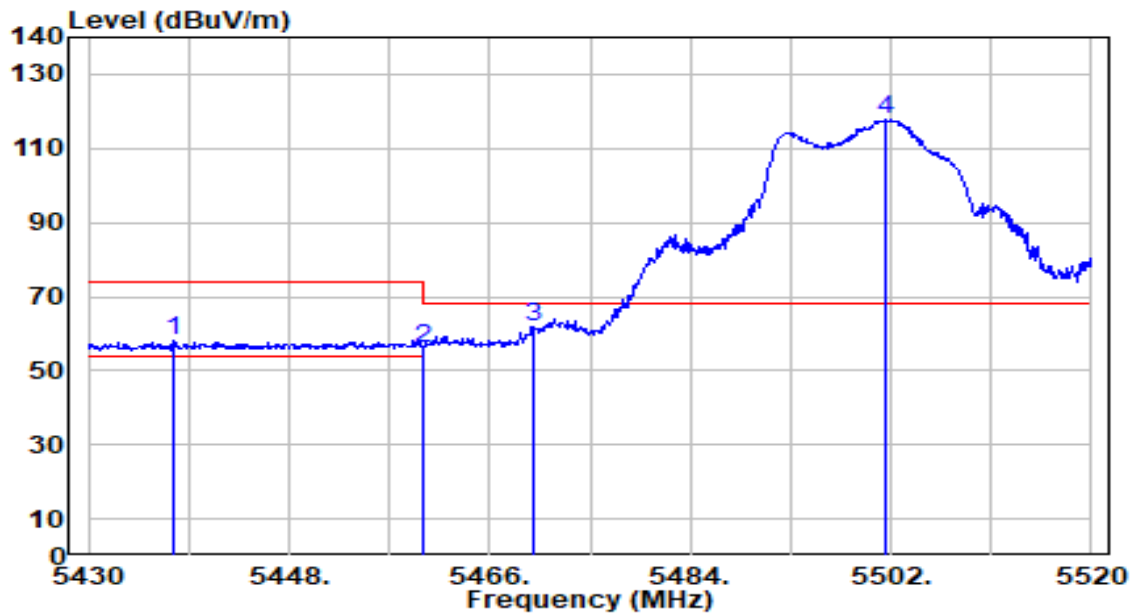


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5437.740	56.46	1.78	58.24	-15.76	74.00	200	154	Peak
2	5460.000	54.16	1.87	56.03	-17.97	74.00	200	154	Peak
3	* 5470.000	59.69	1.92	61.61	-6.59	68.20	200	154	Peak
4	5501.550	115.72	2.05	117.76	N/A	N/A	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

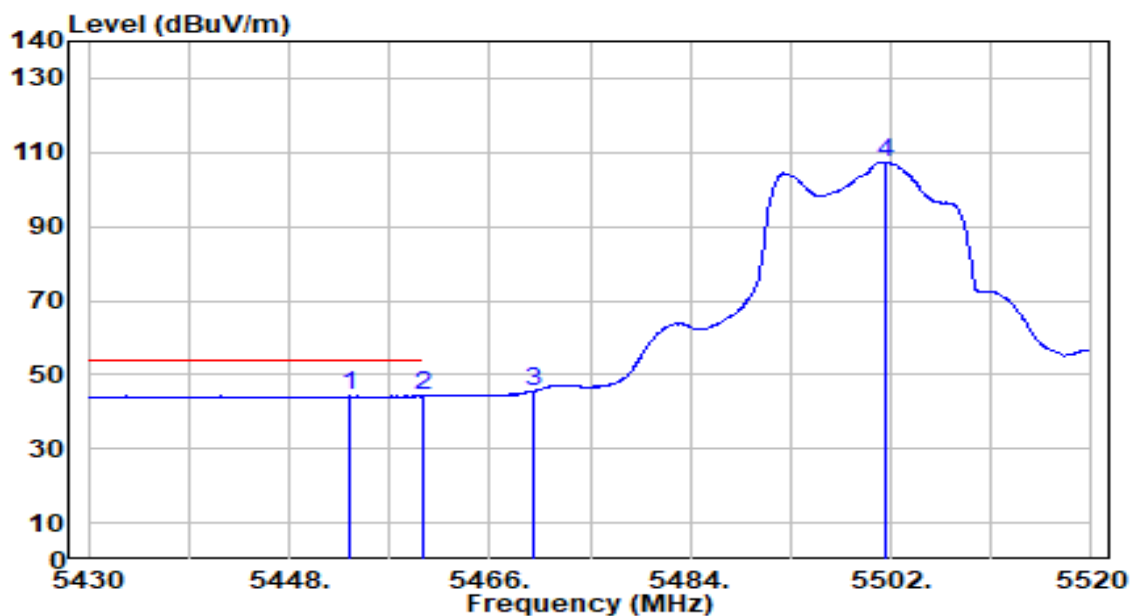


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.490	42.48	1.85	44.32	-9.68	54.00	200	154	Average
2		5460.000	42.27	1.87	44.14	-9.86	54.00	200	154	Average
3		5470.000	43.60	1.92	45.51	N/A	N/A	200	154	Average
4		5501.460	105.44	2.05	107.48	N/A	N/A	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

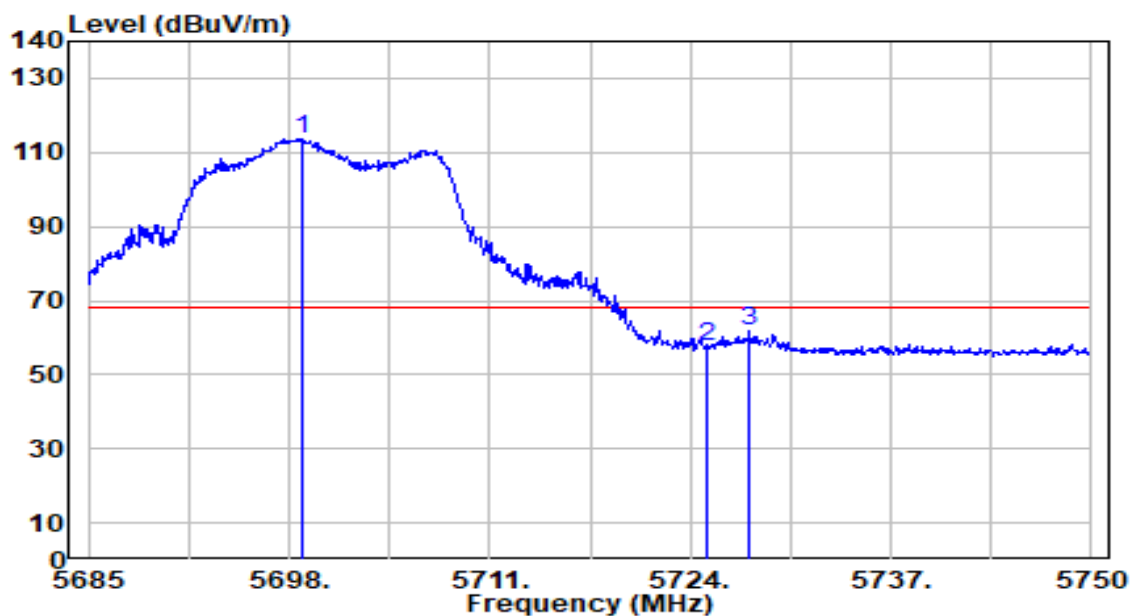


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5698.845	110.68	3.01	113.69	N/A	N/A	208	353	Peak
2	5725.000	54.45	3.14	57.59	-10.61	68.20	208	353	Peak
3	* 5727.835	58.52	3.15	61.67	-6.53	68.20	208	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

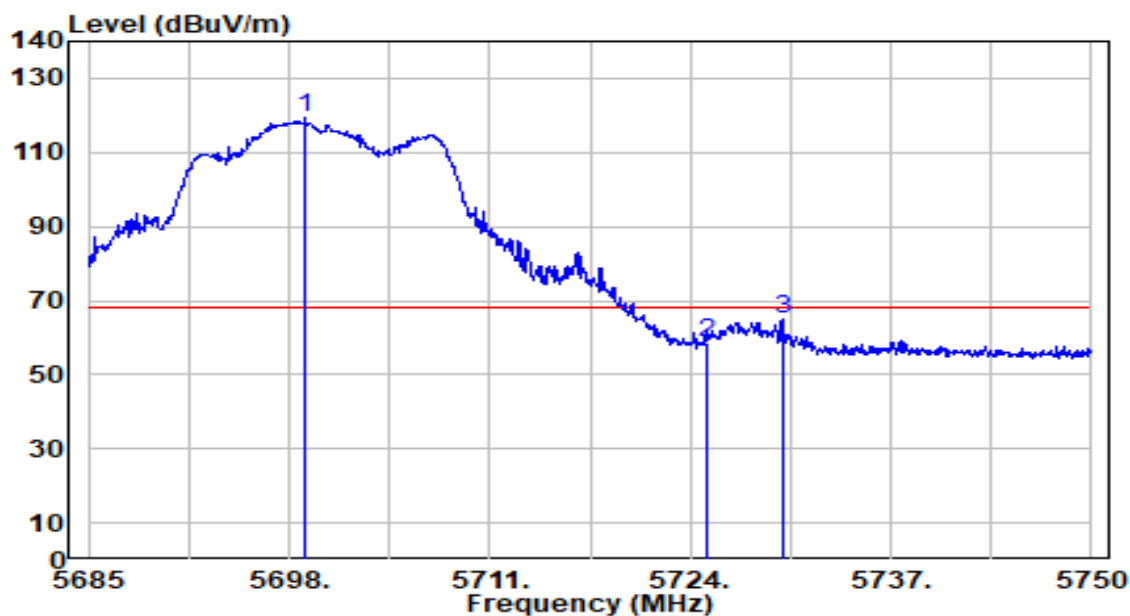


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.040	116.50	3.01	119.51	N/A	N/A	190	350	Peak
2	5725.000	55.58	3.14	58.72	-9.48	68.20	190	350	Peak
3	* 5729.980	61.64	3.17	64.80	-3.40	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

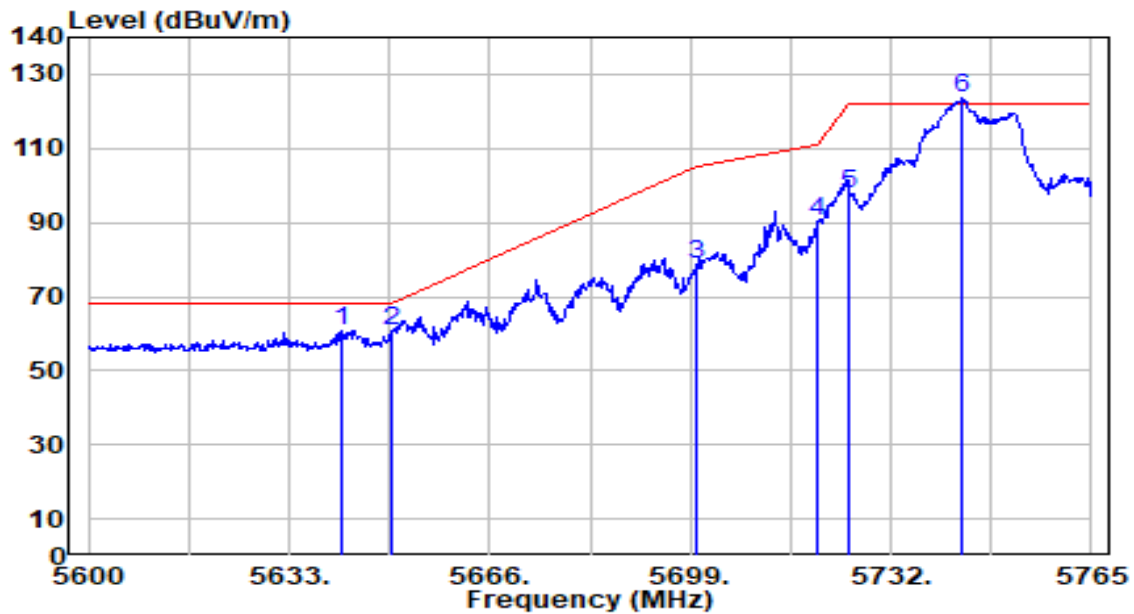


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5641.580	58.00	2.74	60.74	-7.46	68.20	206	355	Peak
2	* 5650.000	58.04	2.78	60.82	-7.38	68.20	206	355	Peak
3	5700.000	75.46	3.02	78.47	-26.73	105.20	206	355	Peak
4	5720.000	87.48	3.12	90.59	-20.21	110.80	206	355	Peak
5	5725.000	94.68	3.14	97.82	-24.38	122.20	206	355	Peak
6	5743.715	120.13	3.23	123.36	N/A	N/A	206	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

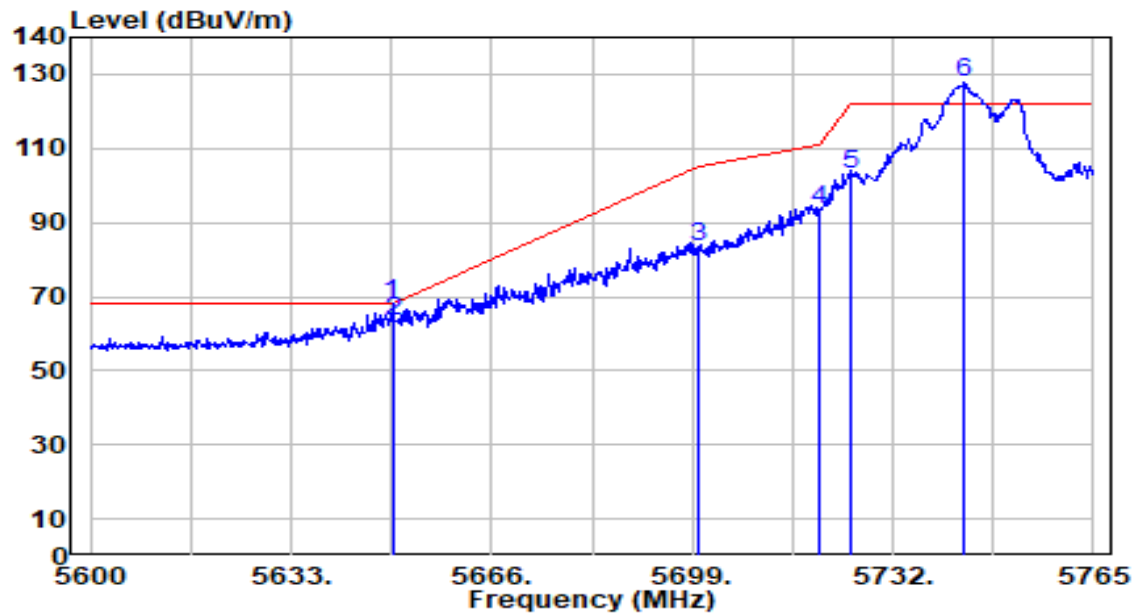


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5649.665	65.21	2.78	67.98	-0.22	68.20	202	347	Peak
2		5650.000	60.71	2.78	63.49	-4.71	68.20	202	347	Peak
3		5700.000	80.69	3.02	83.70	-21.50	105.20	202	347	Peak
4		5720.000	90.33	3.12	93.45	-17.35	110.80	202	347	Peak
5		5725.000	99.96	3.14	103.10	-19.10	122.20	202	347	Peak
6		5743.715	124.56	3.23	127.80	N/A	N/A	202	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

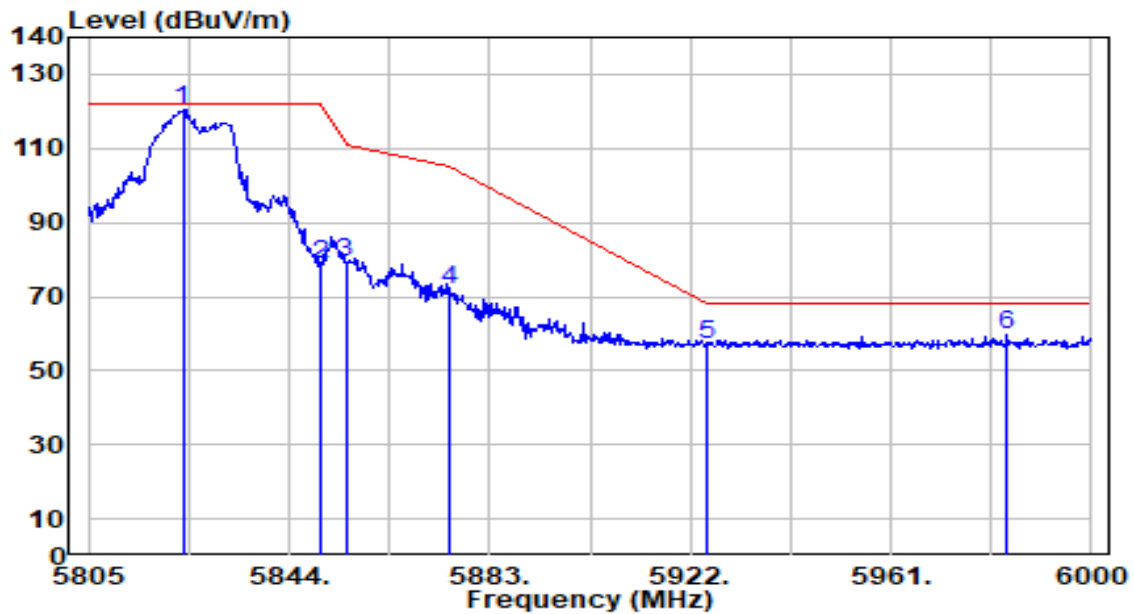


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.330	117.13	3.51	120.64	N/A	N/A	196	360	Peak
2	5850.000	75.19	3.51	78.70	-43.50	122.20	196	360	Peak
3	5855.000	75.49	3.51	79.00	-31.80	110.80	196	360	Peak
4	5875.000	68.17	3.50	71.67	-33.53	105.20	196	360	Peak
5	5925.000	53.41	3.51	56.92	-11.28	68.20	196	360	Peak
6	* 5983.620	56.20	3.53	59.74	-8.46	68.20	196	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

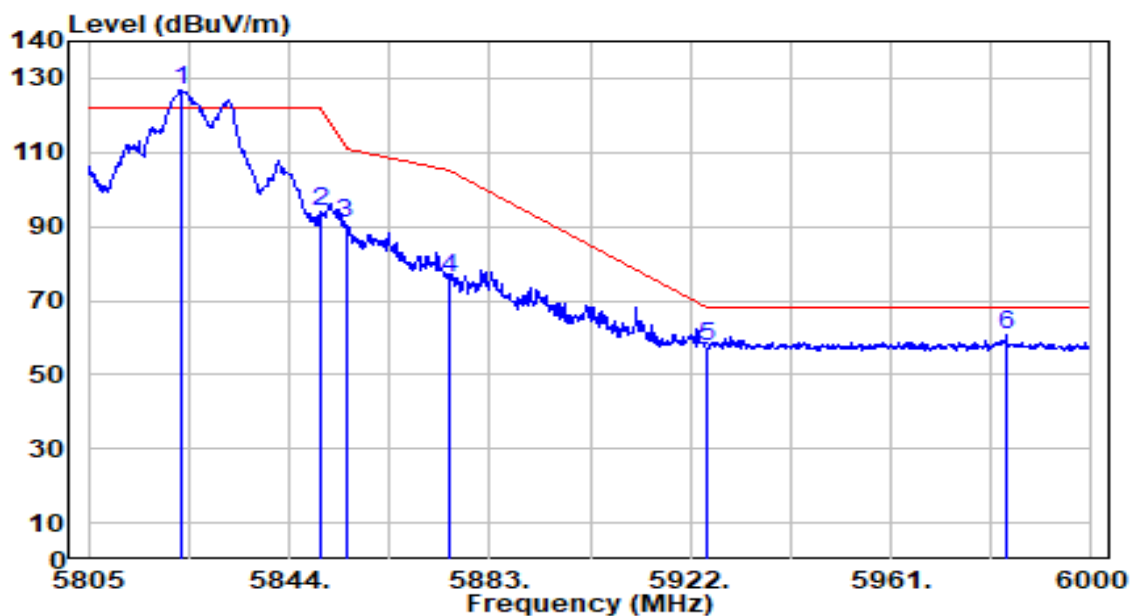


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.940	123.23	3.51	126.74	N/A	N/A	182	346	Peak
2	5850.000	90.66	3.51	94.16	-28.04	122.20	182	346	Peak
3	5855.000	87.17	3.51	90.68	-20.12	110.80	182	346	Peak
4	5875.000	72.69	3.50	76.19	-29.01	105.20	182	346	Peak
5	5925.000	54.30	3.51	57.81	-10.39	68.20	182	346	Peak
6	* 5983.425	57.17	3.53	60.70	-7.50	68.20	182	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

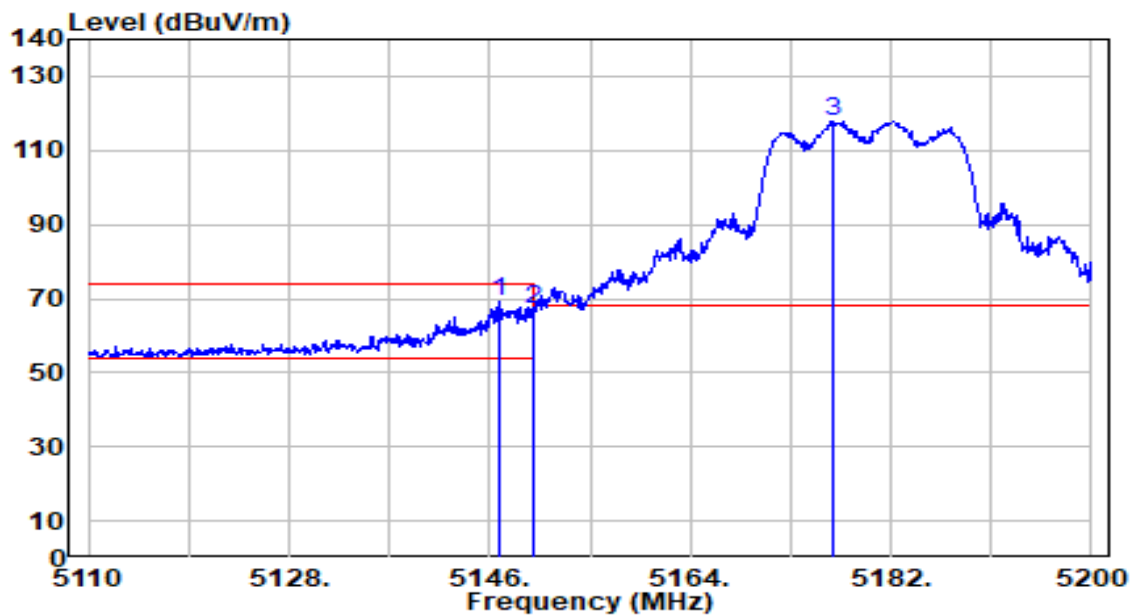


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	67.58	1.81	69.39	-4.61	74.00	281	6	Peak
2		5150.000	65.52	1.82	67.34	-6.66	74.00	281	6	Peak
3		5176.780	116.02	1.86	117.89	N/A	N/A	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

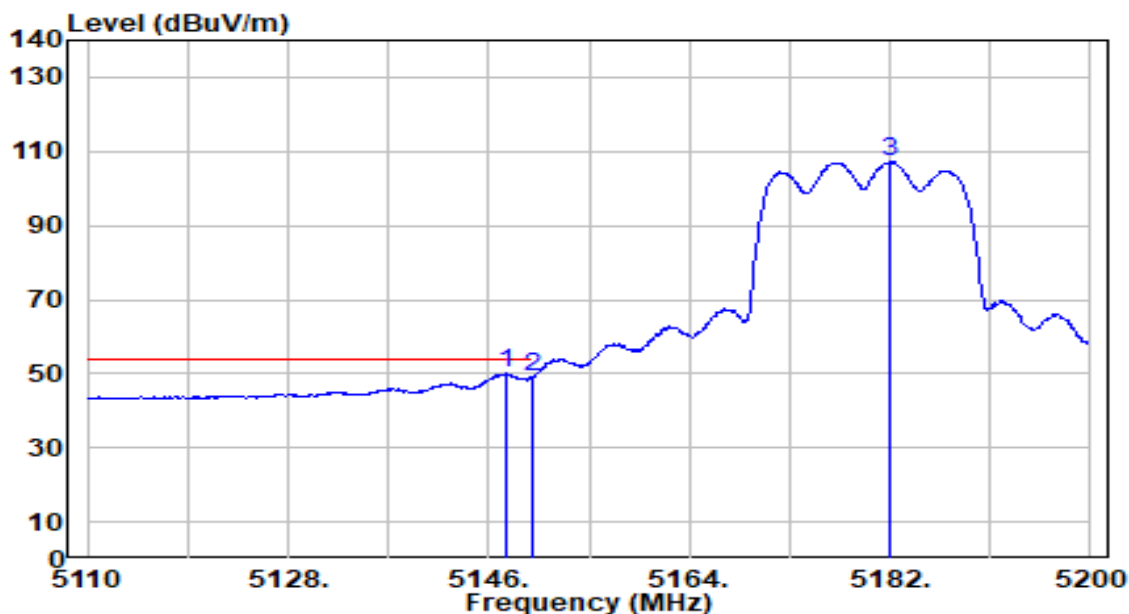


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.530	48.13	1.81	49.94	-4.06	54.00	281	6	Average
2		5150.000	47.38	1.82	49.20	-4.80	54.00	281	6	Average
3		5182.000	105.18	1.87	107.05	N/A	N/A	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

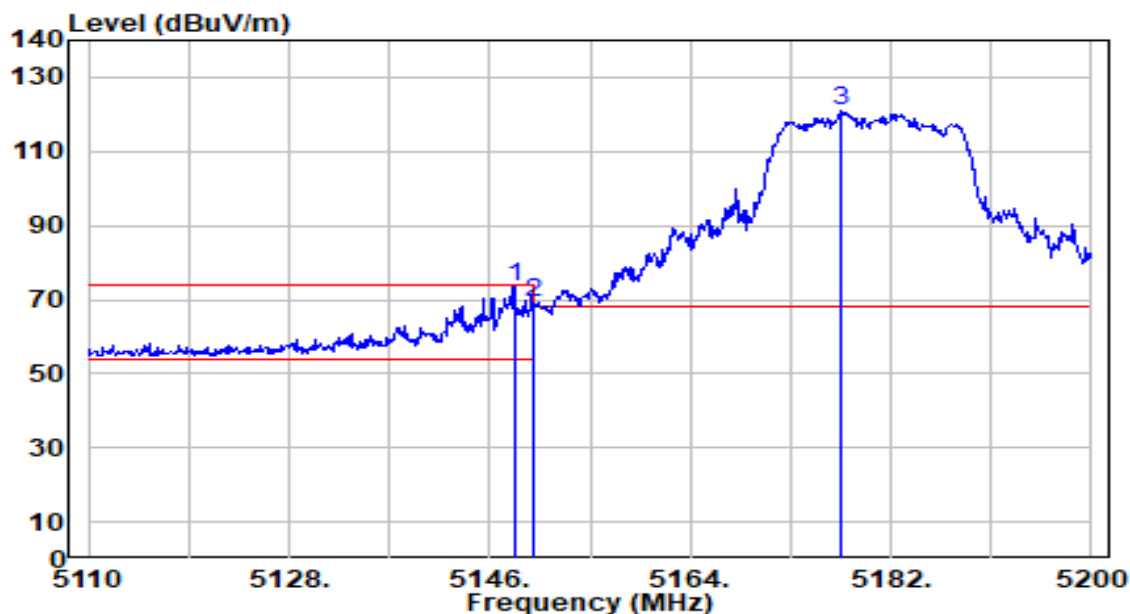


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.250	71.40	1.82	73.21	-0.79	74.00	136	248	Peak
2		5150.000	67.42	1.82	69.24	-4.76	74.00	136	248	Peak
3		5177.500	118.94	1.86	120.80	N/A	N/A	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

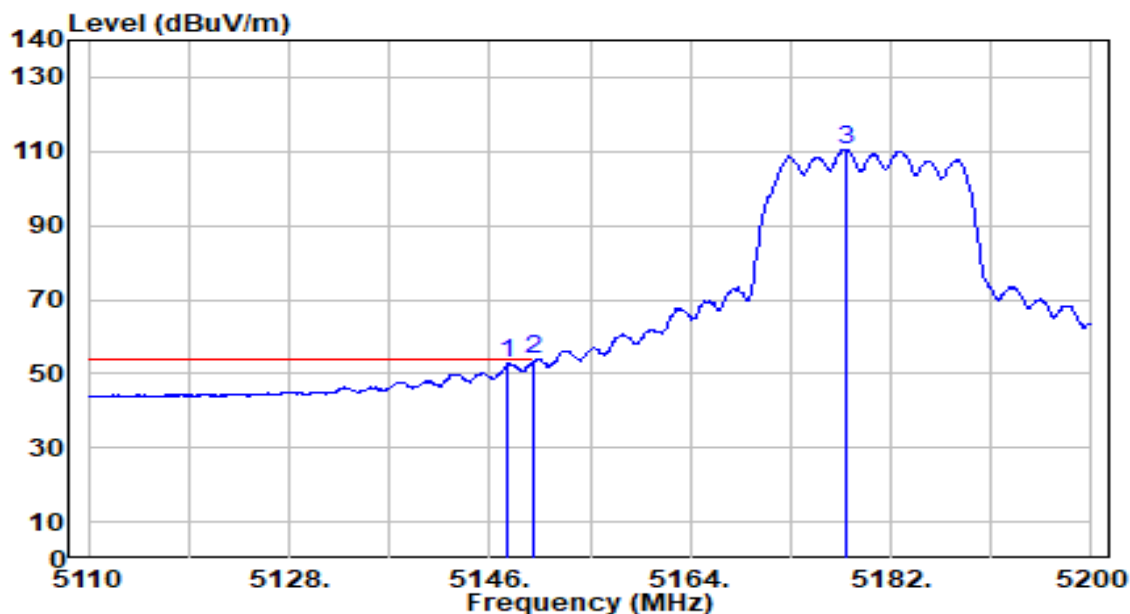


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5147.620	50.86	1.82	52.67	-1.33	54.00	136	248	Average
2	*	5150.000	51.92	1.82	53.74	-0.26	54.00	136	248	Average
3		5177.950	108.67	1.87	110.54	N/A	N/A	136	248	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

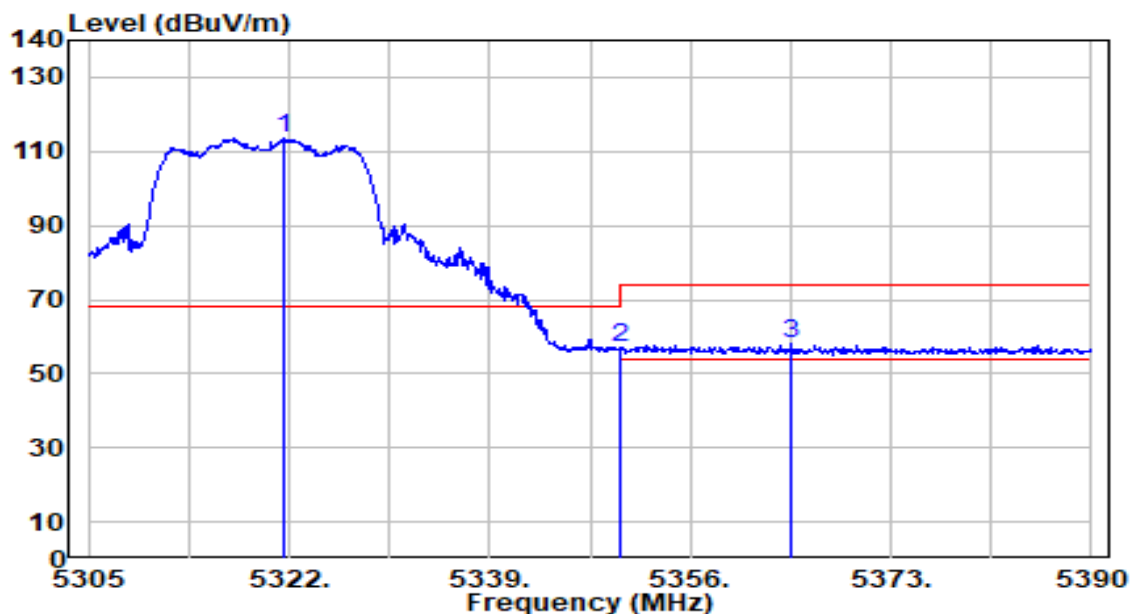


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.490	111.90	1.73	113.62	N/A	N/A	288	1	Peak
2	5350.000	55.13	1.69	56.83	-17.17	74.00	288	1	Peak
3	* 5364.585	56.43	1.67	58.10	-15.90	74.00	288	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

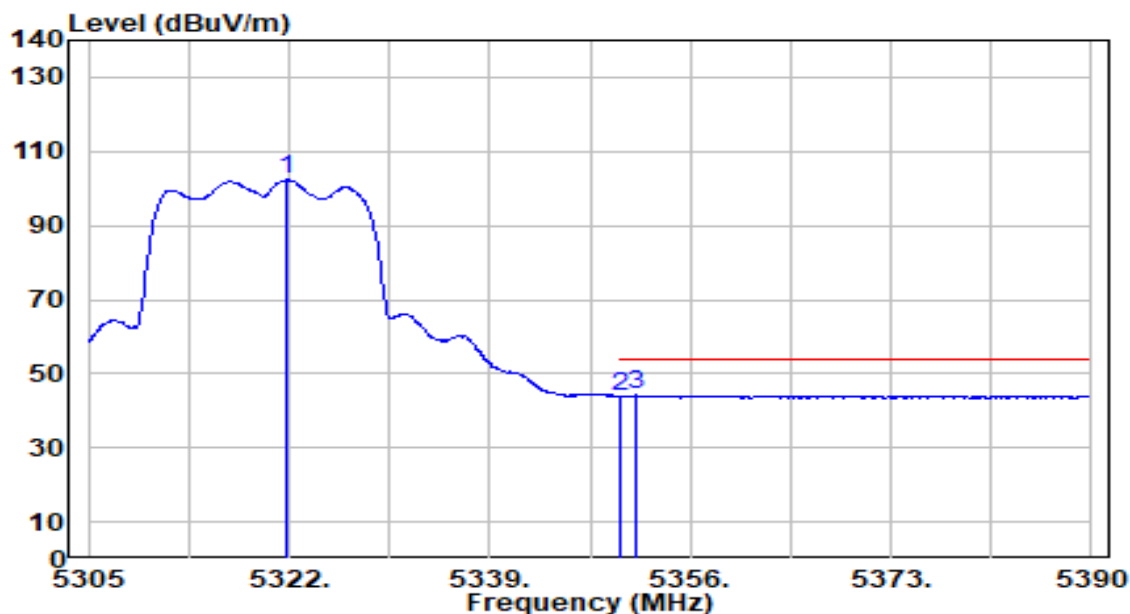


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.830	100.59	1.73	102.32	N/A	N/A	288	1	Average
2	5350.000	42.22	1.69	43.91	-10.09	54.00	288	1	Average
3	* 5351.495	42.44	1.69	44.13	-9.87	54.00	288	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

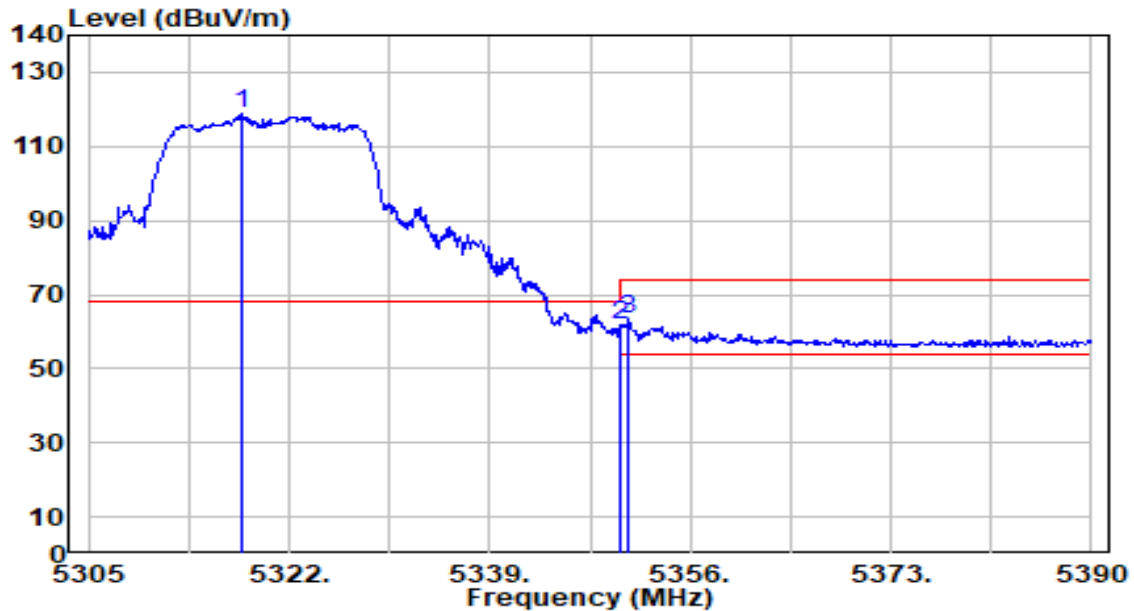


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.090	117.03	1.73	118.76	N/A	N/A	173	151	Peak
2	5350.000	60.18	1.69	61.87	-12.13	74.00	173	151	Peak
3	* 5350.730	61.59	1.69	63.28	-10.72	74.00	173	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

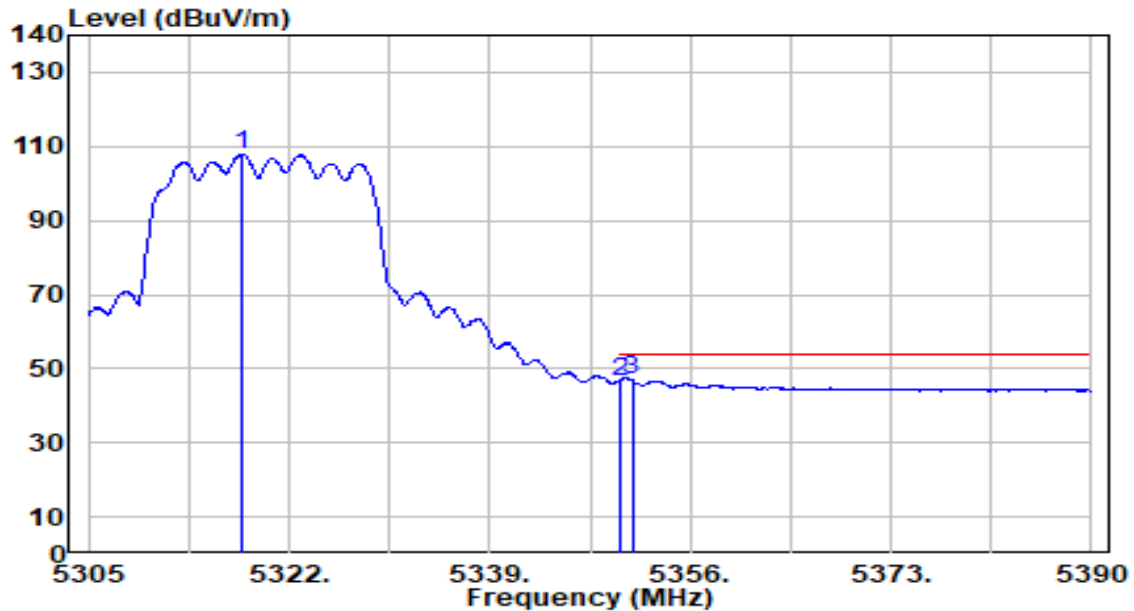


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.920	106.15	1.73	107.88	N/A	N/A	173	151	Average
2	5350.000	44.87	1.69	46.56	-7.44	54.00	173	151	Average
3	* 5351.070	45.21	1.69	46.90	-7.10	54.00	173	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

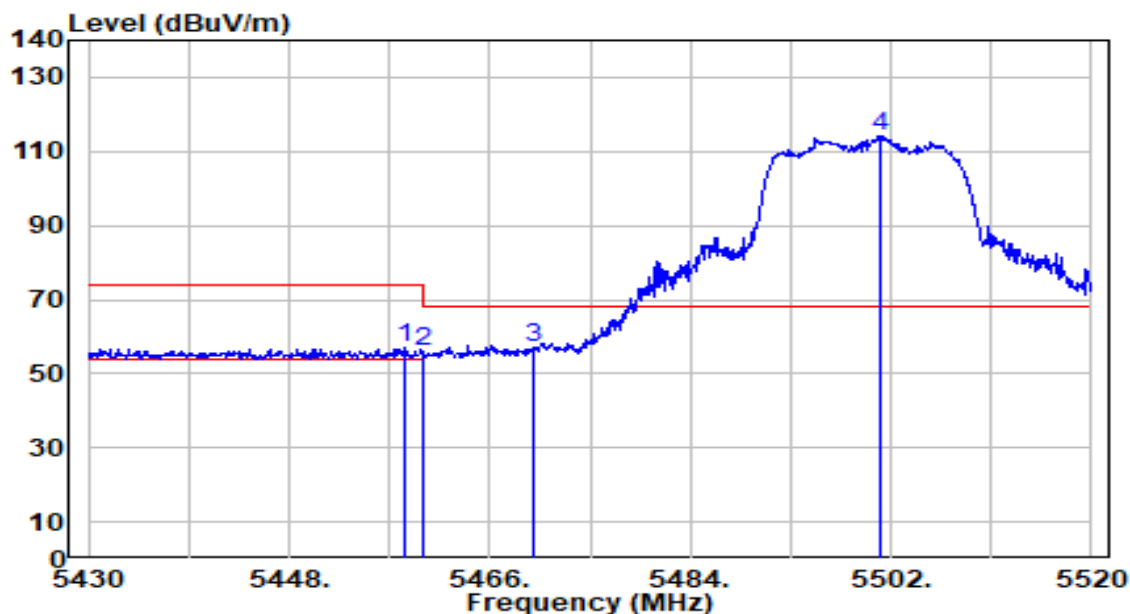


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.350	55.21	1.87	57.07	-16.93	74.00	208	206	Peak
2	5460.000	54.22	1.87	56.09	-17.91	74.00	208	206	Peak
3	* 5470.000	55.38	1.92	57.29	-10.91	68.20	208	206	Peak
4	5501.100	112.27	2.05	114.31	N/A	N/A	208	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

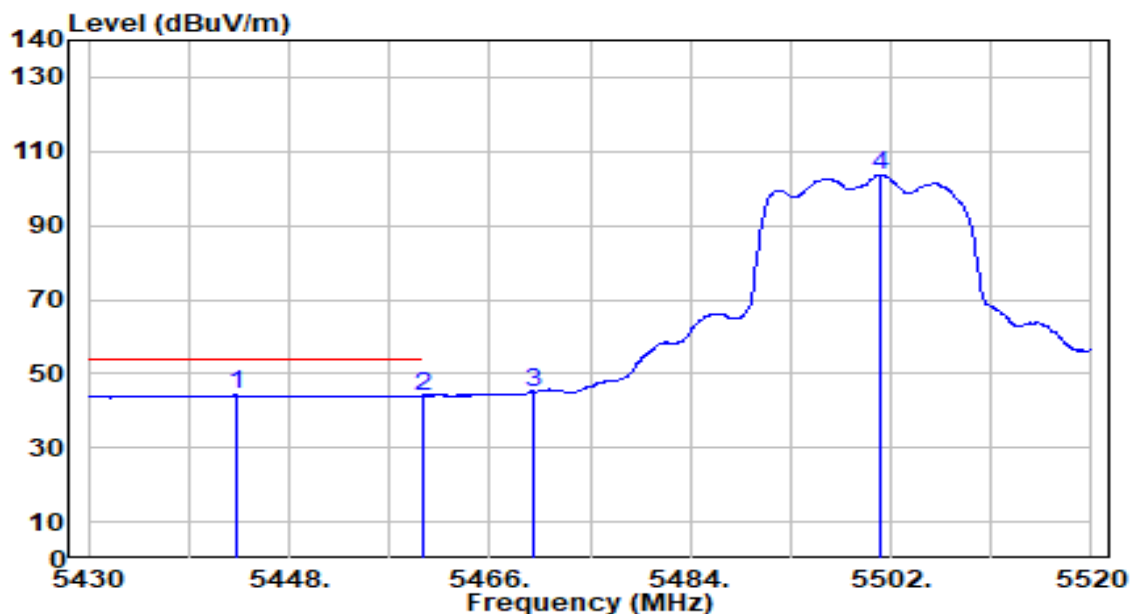


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5443.230	42.41	1.80	44.22	-9.78	54.00	208	206	Average
2		5460.000	42.14	1.87	44.01	-9.99	54.00	208	206	Average
3		5470.000	43.08	1.92	45.00	N/A	N/A	208	206	Average
4		5501.100	101.62	2.05	103.67	N/A	N/A	208	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

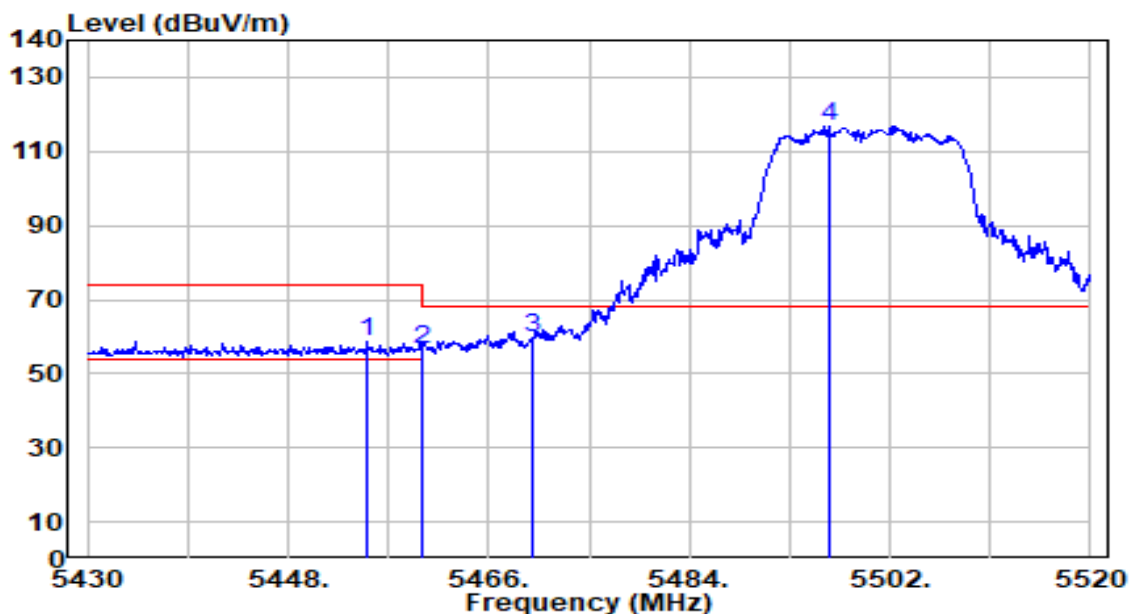


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.110	56.62	1.85	58.48	-15.52	74.00	200	154	Peak
2	5460.000	54.55	1.87	56.42	-17.58	74.00	200	154	Peak
3	* 5470.000	58.04	1.92	59.95	-8.25	68.20	200	154	Peak
4	5496.600	114.91	2.03	116.93	N/A	N/A	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

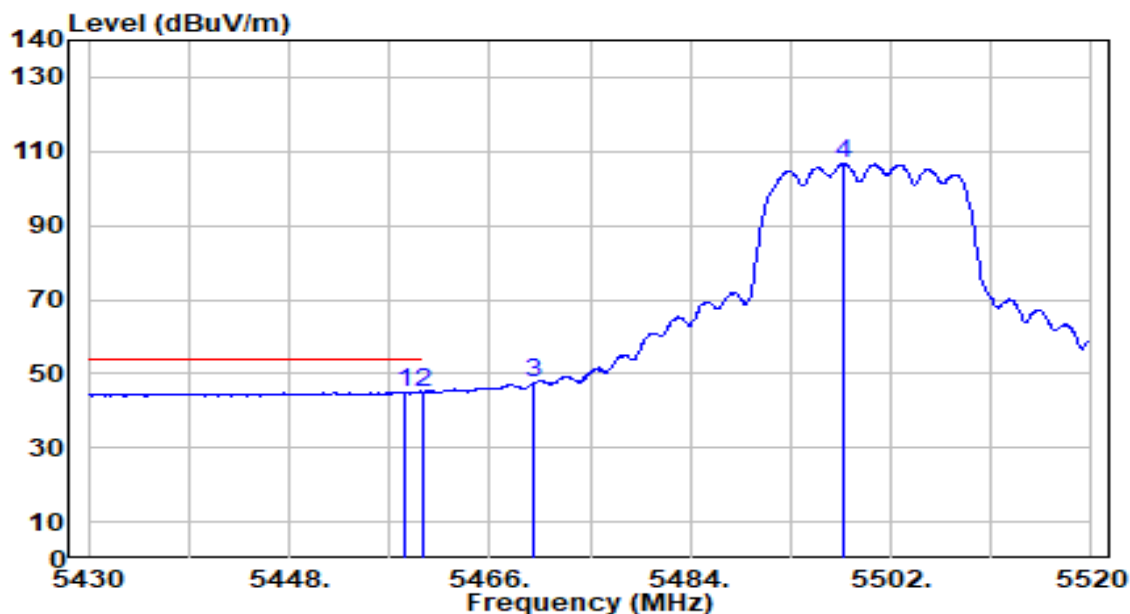


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.350	43.18	1.87	45.05	-8.95	54.00	200	154	Average
2		5460.000	43.07	1.87	44.94	-9.06	54.00	200	154	Average
3		5470.000	45.77	1.92	47.68	N/A	N/A	200	154	Average
4		5497.860	104.74	2.03	106.78	N/A	N/A	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

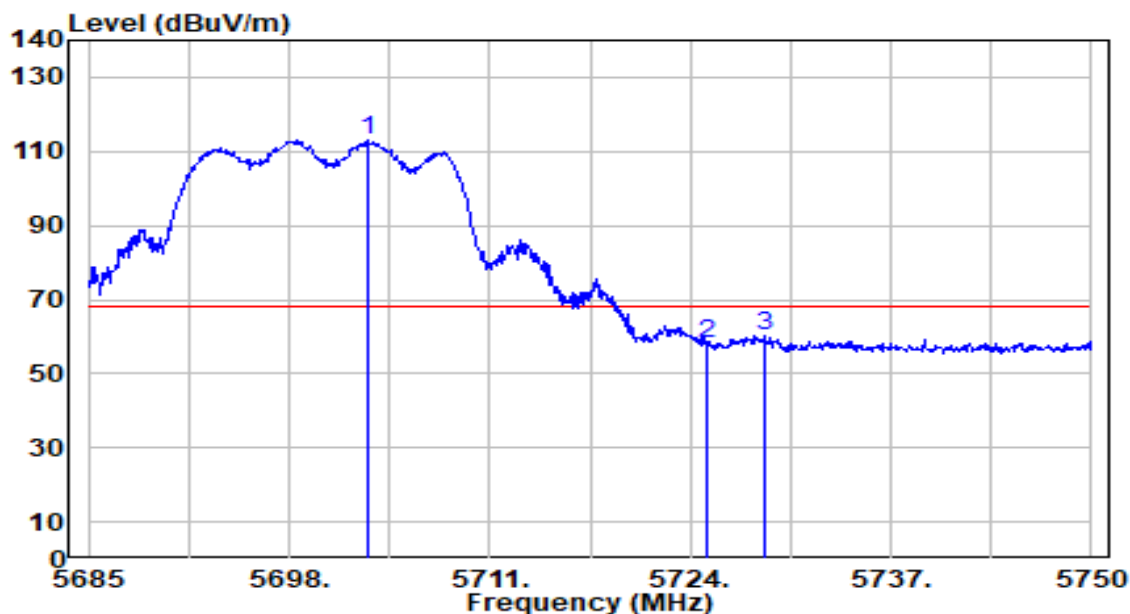


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5703.135	109.94	3.03	112.97	N/A	N/A	208	353	Peak
2	5725.000	54.90	3.14	58.04	-10.16	68.20	208	353	Peak
3	* 5728.810	57.21	3.16	60.37	-7.83	68.20	208	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

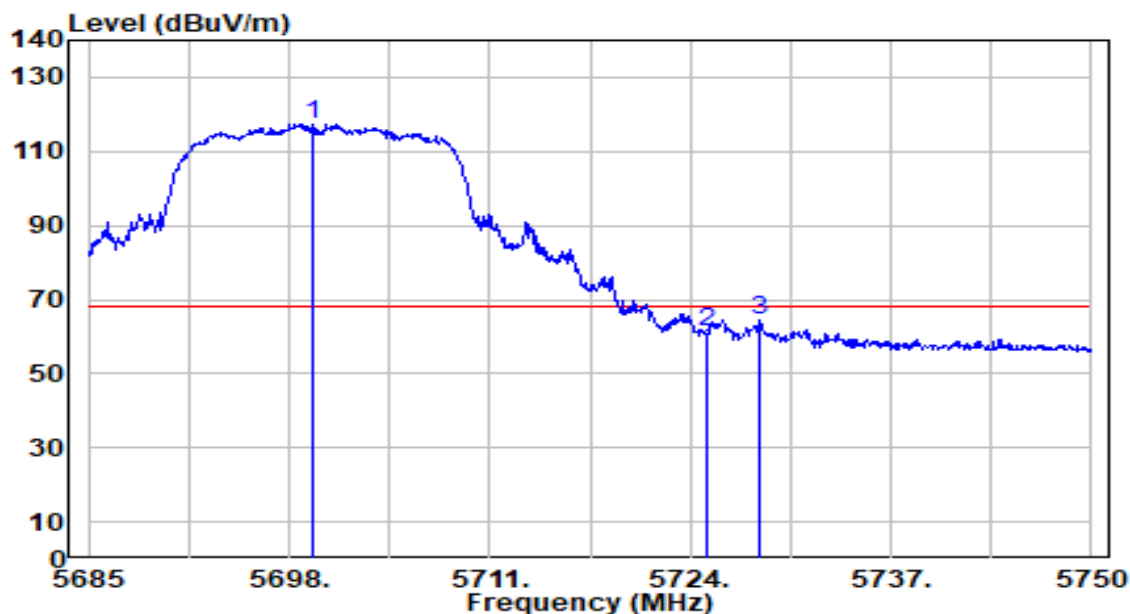


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5699.560	114.32	3.01	117.33	N/A	N/A	190	350	Peak
2	5725.000	58.21	3.14	61.35	-6.85	68.20	190	350	Peak
3	* 5728.550	61.32	3.16	64.48	-3.72	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

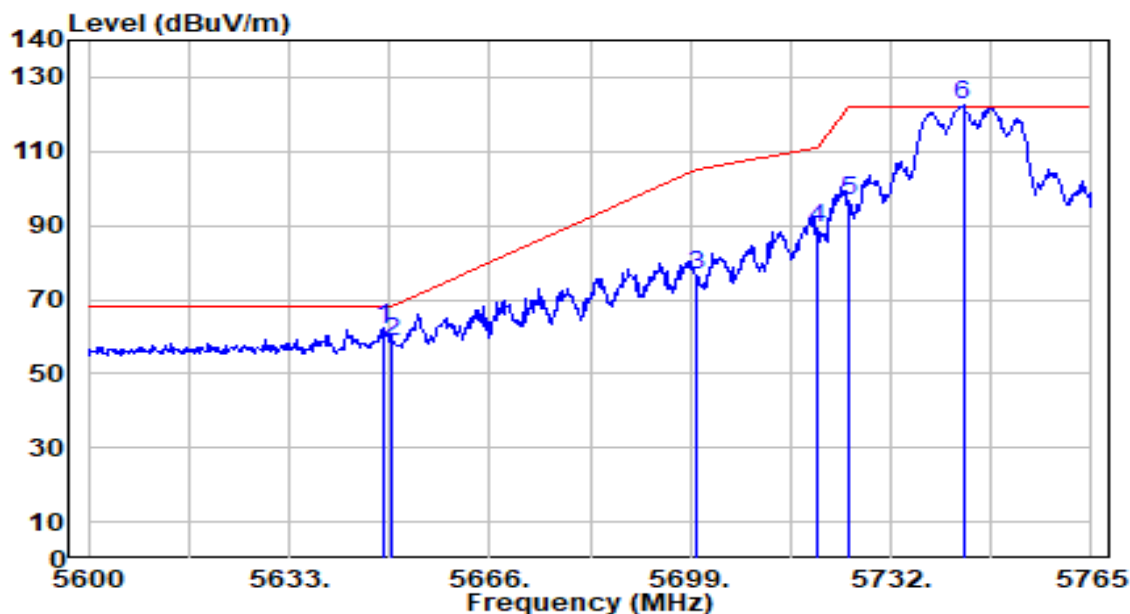


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.510	59.68	2.77	62.45	-5.75	68.20	206	355	Peak
2		5650.000	56.02	2.78	58.80	-9.40	68.20	206	355	Peak
3		5700.000	73.68	3.02	76.70	-28.50	105.20	206	355	Peak
4		5720.000	85.96	3.12	89.08	-21.72	110.80	206	355	Peak
5		5725.000	93.35	3.14	96.49	-25.71	122.20	206	355	Peak
6		5743.880	119.18	3.23	122.42	N/A	N/A	206	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

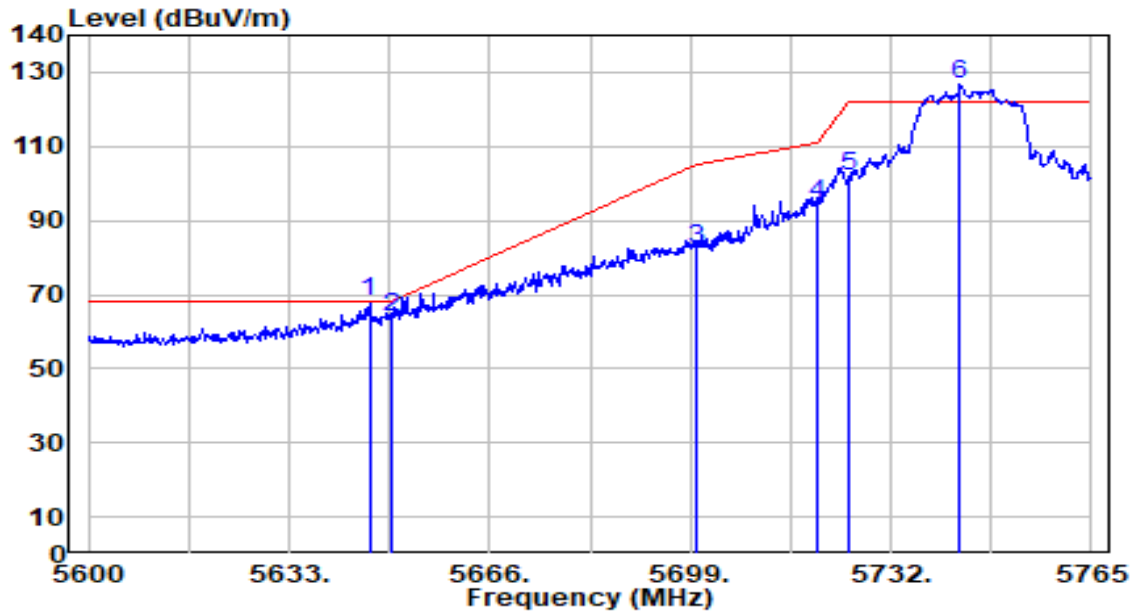


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.200	65.22	2.76	67.97	-0.23	68.20	202	347	Peak
2		5650.000	61.04	2.78	63.81	-4.39	68.20	202	347	Peak
3		5700.000	79.66	3.02	82.68	-22.52	105.20	202	347	Peak
4		5720.000	91.27	3.12	94.39	-16.41	110.80	202	347	Peak
5		5725.000	98.62	3.14	101.76	-20.44	122.20	202	347	Peak
6		5743.385	123.63	3.23	126.86	N/A	N/A	202	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

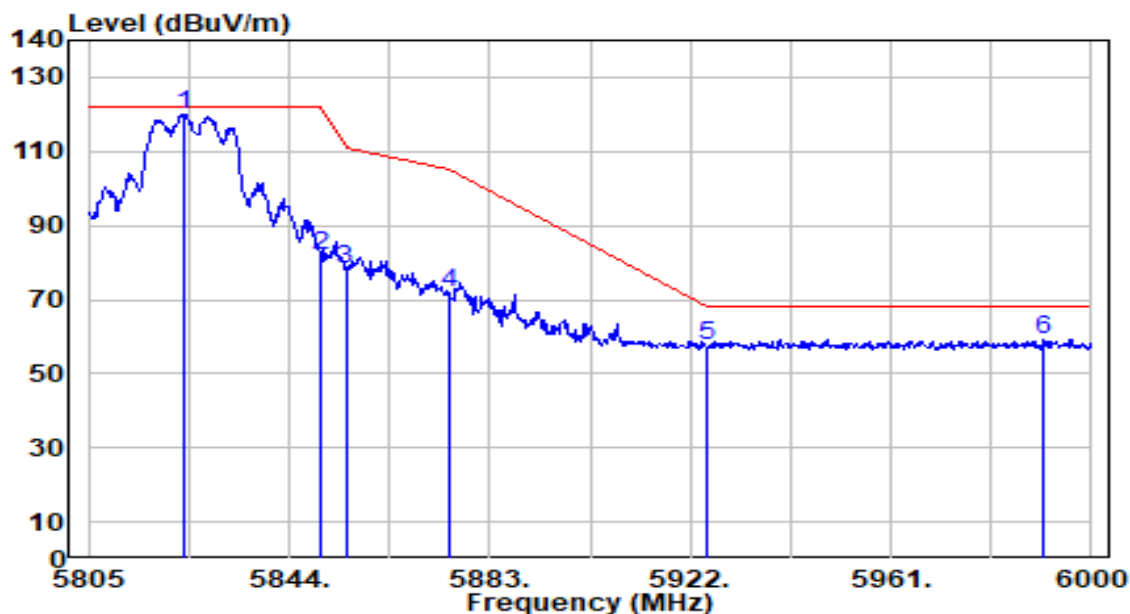


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.525	116.42	3.51	119.93	N/A	N/A	196	360	Peak
2	5850.000	78.34	3.51	81.85	-40.35	122.20	196	360	Peak
3	5855.000	74.70	3.51	78.21	-32.59	110.80	196	360	Peak
4	5875.000	68.09	3.50	71.60	-33.60	105.20	196	360	Peak
5	5925.000	53.83	3.51	57.34	-10.86	68.20	196	360	Peak
6	* 5990.835	55.65	3.54	59.18	-9.02	68.20	196	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

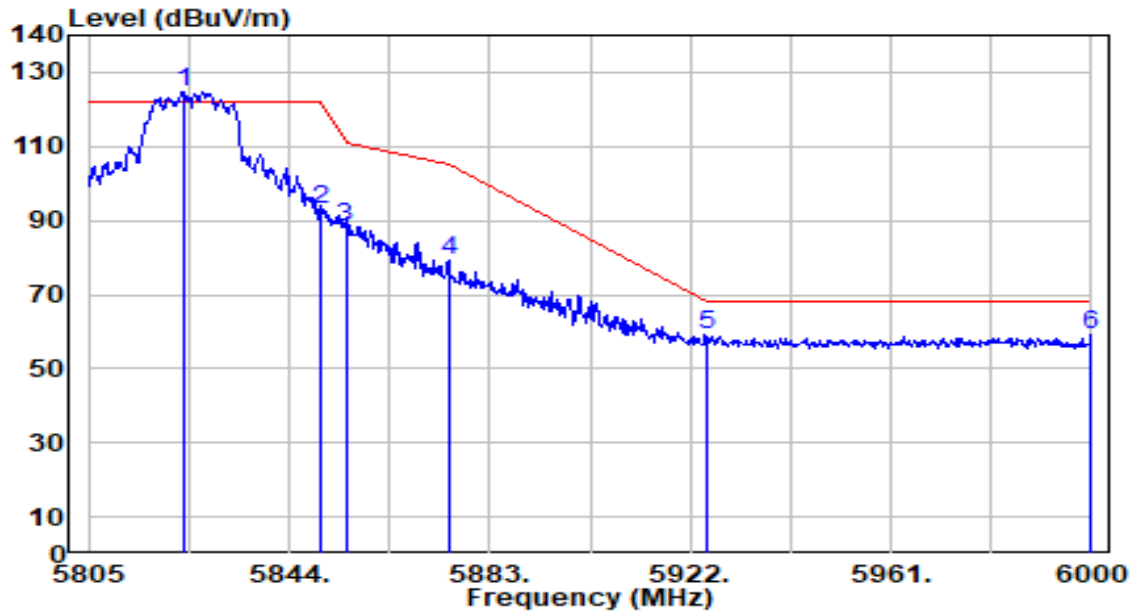


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5823.720	121.13	3.51	124.64	N/A	N/A	182	346	Peak
2	5850.000	89.41	3.51	92.91	-29.29	122.20	182	346	Peak
3	5855.000	84.70	3.51	88.21	-22.59	110.80	182	346	Peak
4	5875.000	75.65	3.50	79.16	-26.04	105.20	182	346	Peak
5	5925.000	55.45	3.51	58.96	-9.24	68.20	182	346	Peak
6	* 5999.805	55.44	3.54	58.98	-9.22	68.20	182	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

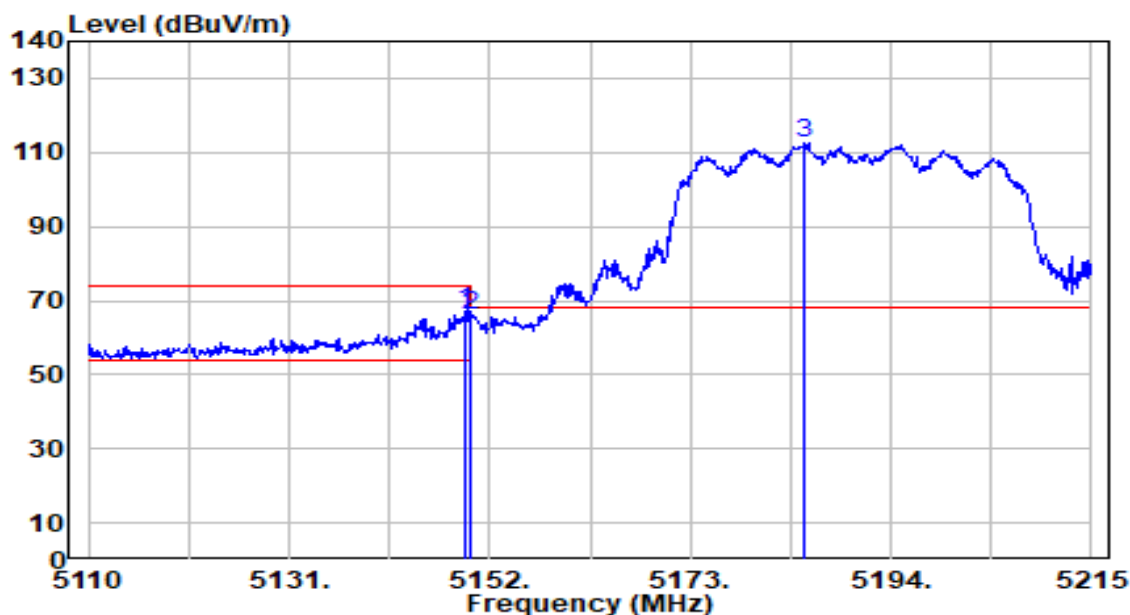


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.375	65.35	1.82	67.16	-6.84	74.00	281	6	Peak
2		5150.000	64.06	1.82	65.88	-8.12	74.00	281	6	Peak
3		5184.970	110.56	1.88	112.44	N/A	N/A	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

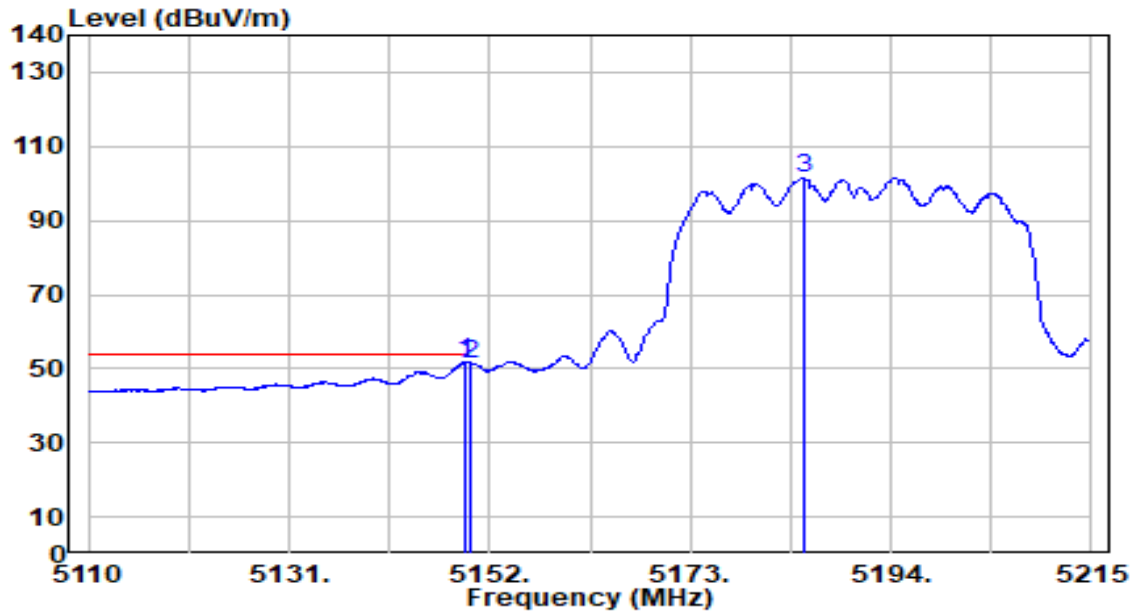


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	49.83	1.82	51.65	-2.35	54.00	281	6	Average
2		5150.000	49.63	1.82	51.45	-2.55	54.00	281	6	Average
3		5184.865	99.60	1.88	101.48	N/A	N/A	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

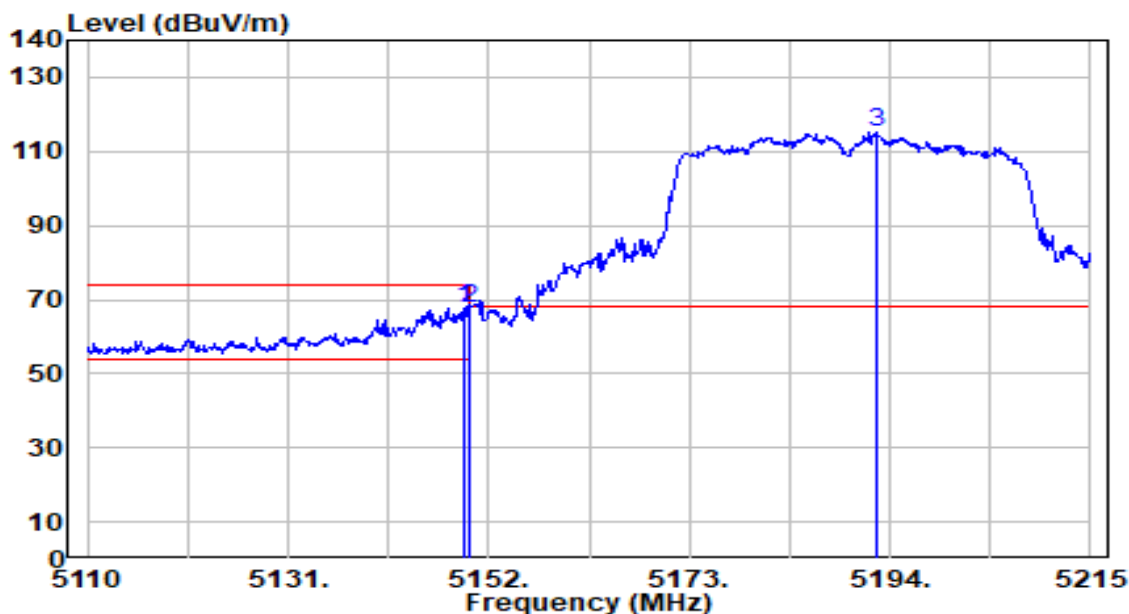


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	65.86	1.82	67.67	-6.33	74.00	136	248	Peak
2		5150.000	65.62	1.82	67.44	-6.56	74.00	136	248	Peak
3		5192.635	113.51	1.89	115.40	N/A	N/A	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

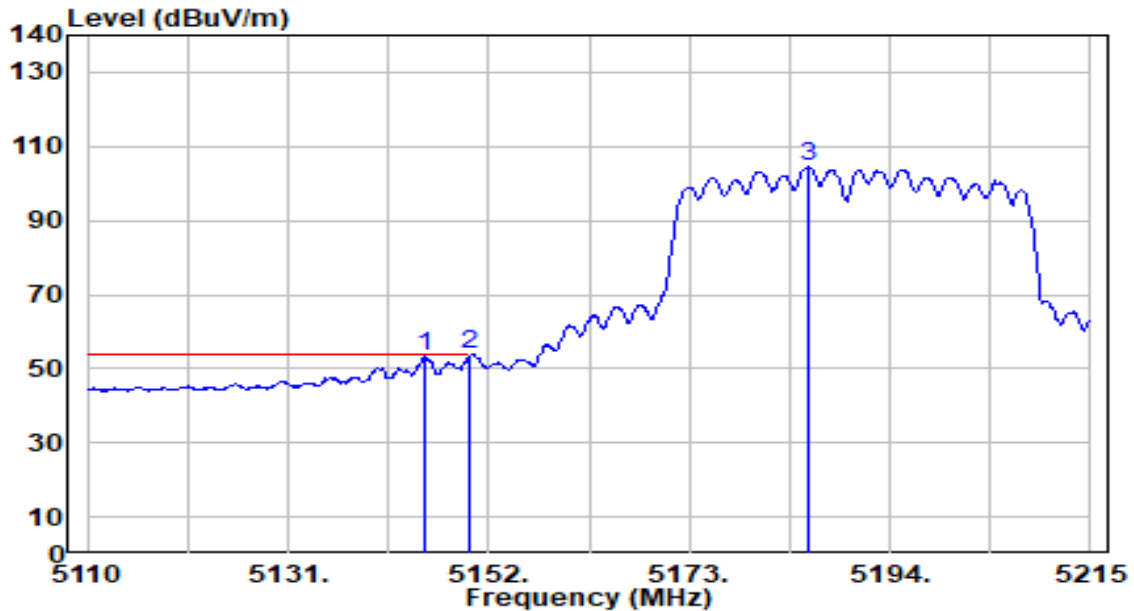


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5145.385	51.29	1.81	53.10	-0.90	54.00	136	248	Average
2	*	5150.000	51.97	1.82	53.79	-0.21	54.00	136	248	Average
3		5185.495	102.49	1.88	104.37	N/A	N/A	136	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

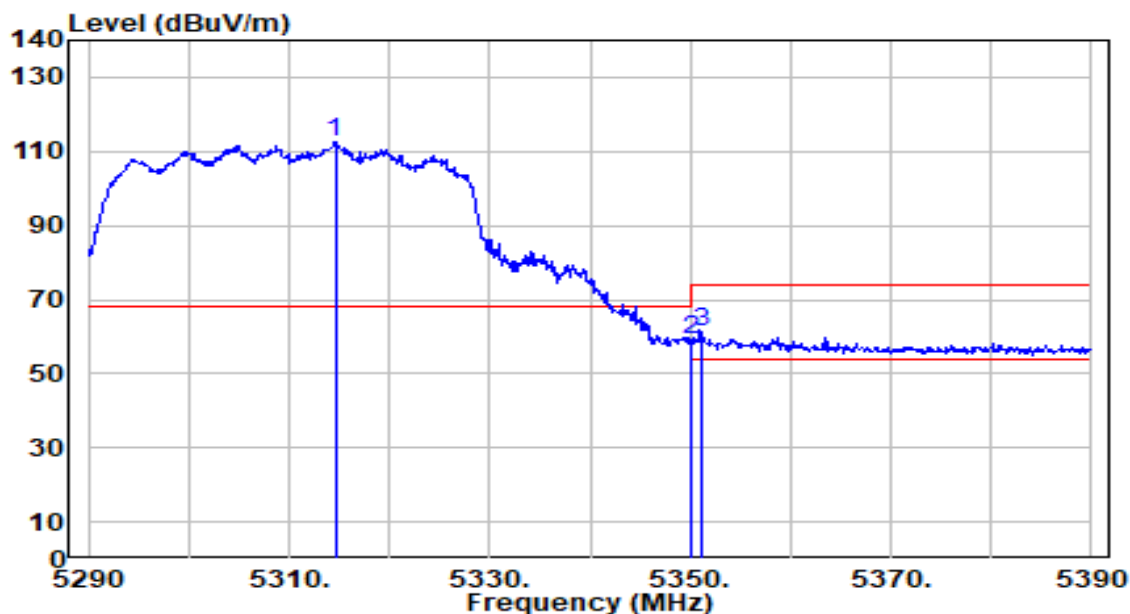


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.600	110.60	1.74	112.34	N/A	N/A	288	1	Peak
2	5350.000	57.44	1.69	59.14	-14.86	74.00	288	1	Peak
3	* 5351.200	59.53	1.69	61.22	-12.78	74.00	288	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

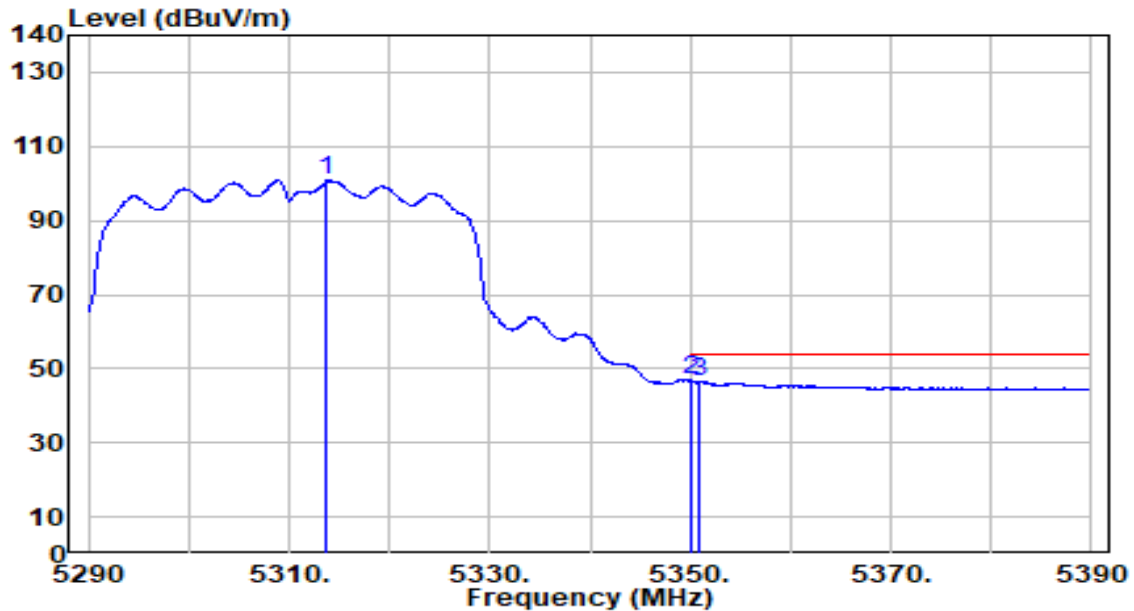


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5313.800	99.09	1.74	100.83	N/A	N/A	288	1	Average
2	*	5350.000	45.17	1.69	46.86	-7.14	54.00	288	1	Average
3		5351.000	44.68	1.69	46.37	-7.63	54.00	288	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

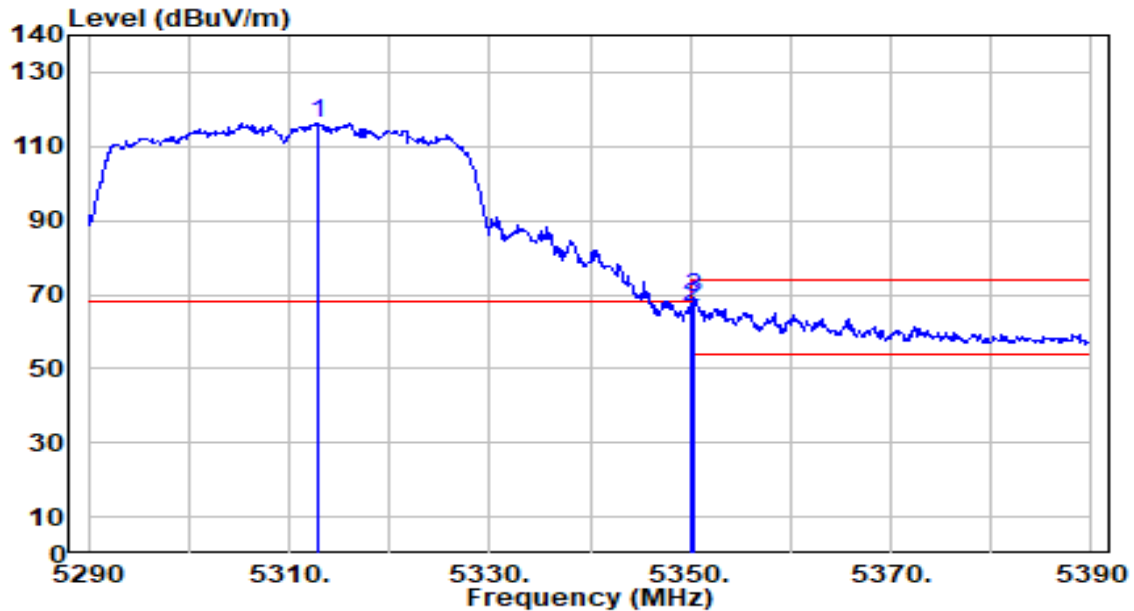


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.800	114.59	1.74	116.33	N/A	N/A	173	151	Peak
2	5350.000	64.96	1.69	66.65	-7.35	74.00	173	151	Peak
3	* 5350.400	67.57	1.69	69.26	-4.74	74.00	173	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

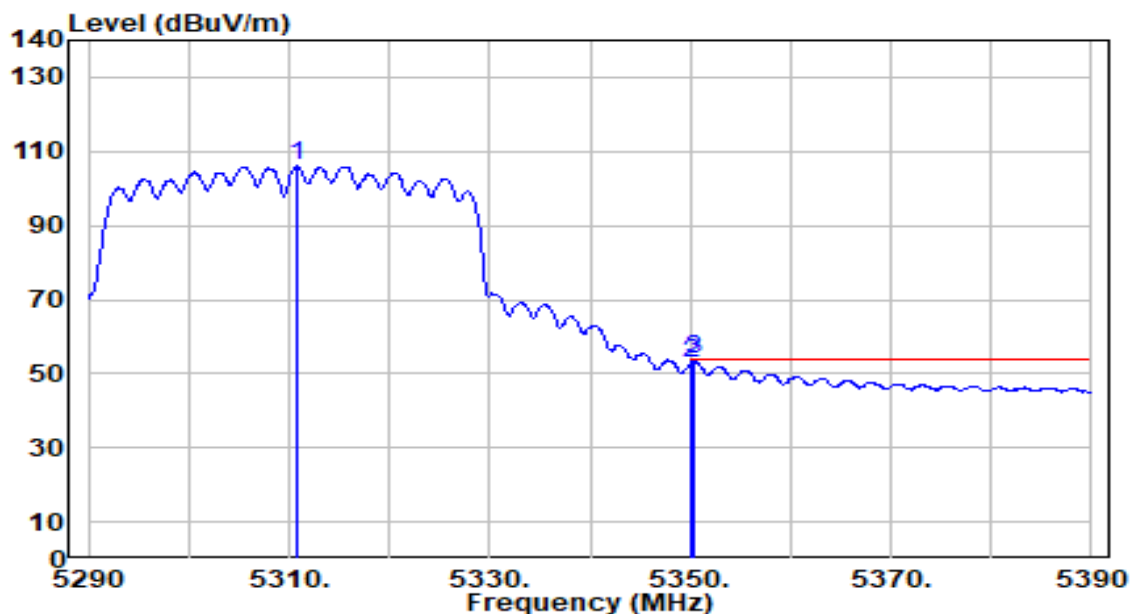


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5310.900	104.34	1.74	106.09	N/A	N/A	173	151	Average
2	5350.000	51.06	1.69	52.75	-1.25	54.00	173	151	Average
3	* 5350.400	52.07	1.69	53.76	-0.24	54.00	173	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

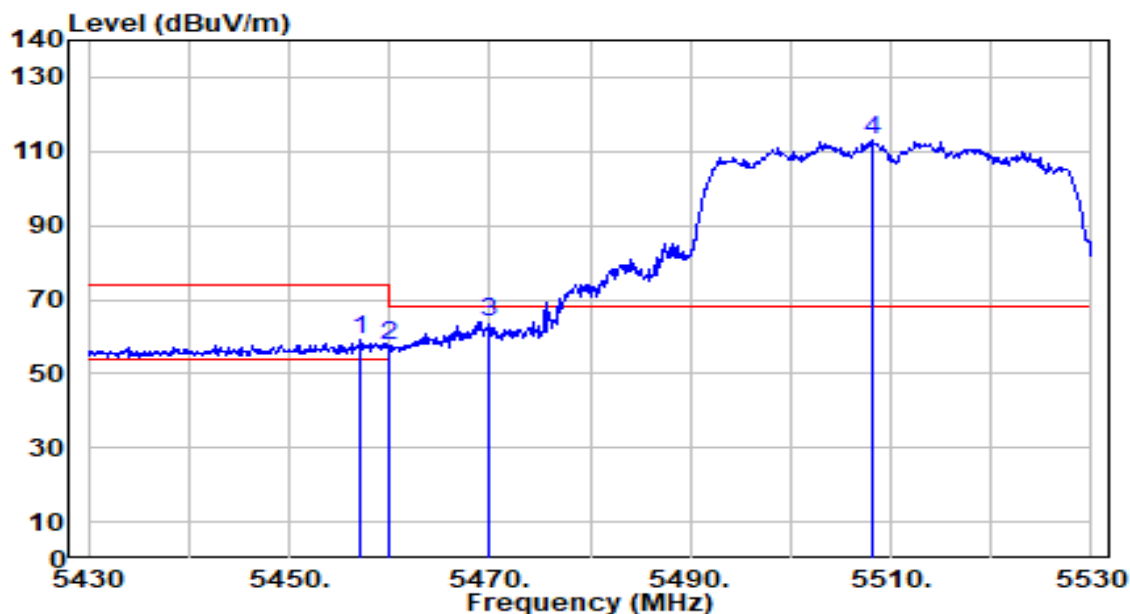


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.200	57.15	1.86	59.01	-14.99	74.00	208	206	Peak
2	5460.000	55.46	1.87	57.33	-16.67	74.00	208	206	Peak
3	* 5470.000	62.07	1.92	63.98	-4.22	68.20	208	206	Peak
4	5508.100	111.19	2.08	113.27	N/A	N/A	208	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

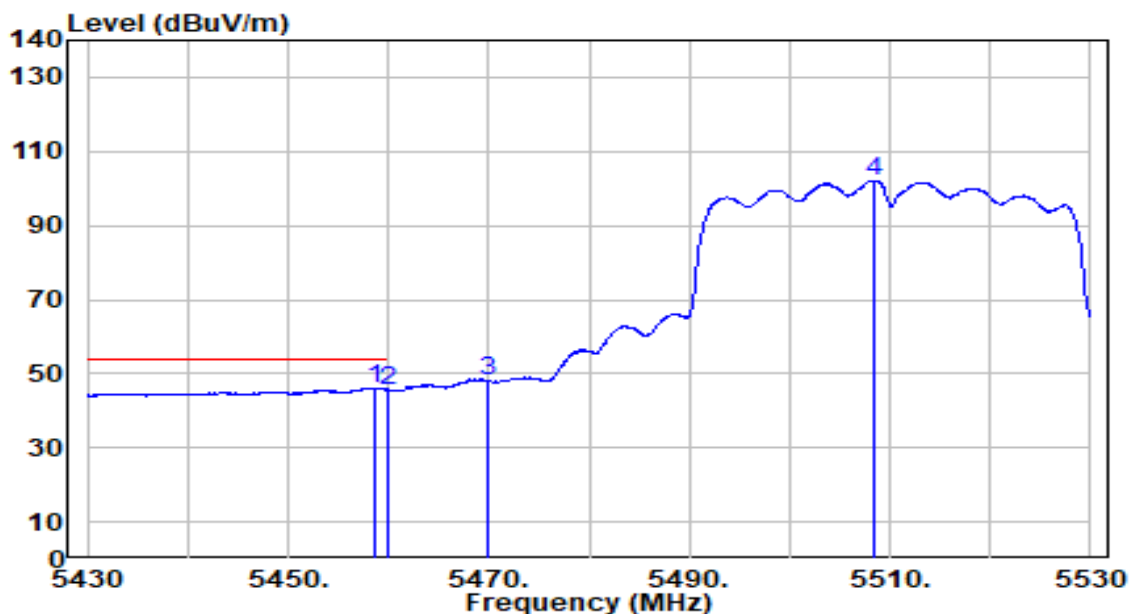


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.600	44.18	1.87	46.04	-7.96	54.00	208	206	Average
2		5460.000	43.69	1.87	45.56	-8.44	54.00	208	206	Average
3		5470.000	46.09	1.92	48.01	N/A	N/A	208	206	Average
4		5508.500	100.14	2.08	102.22	N/A	N/A	208	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

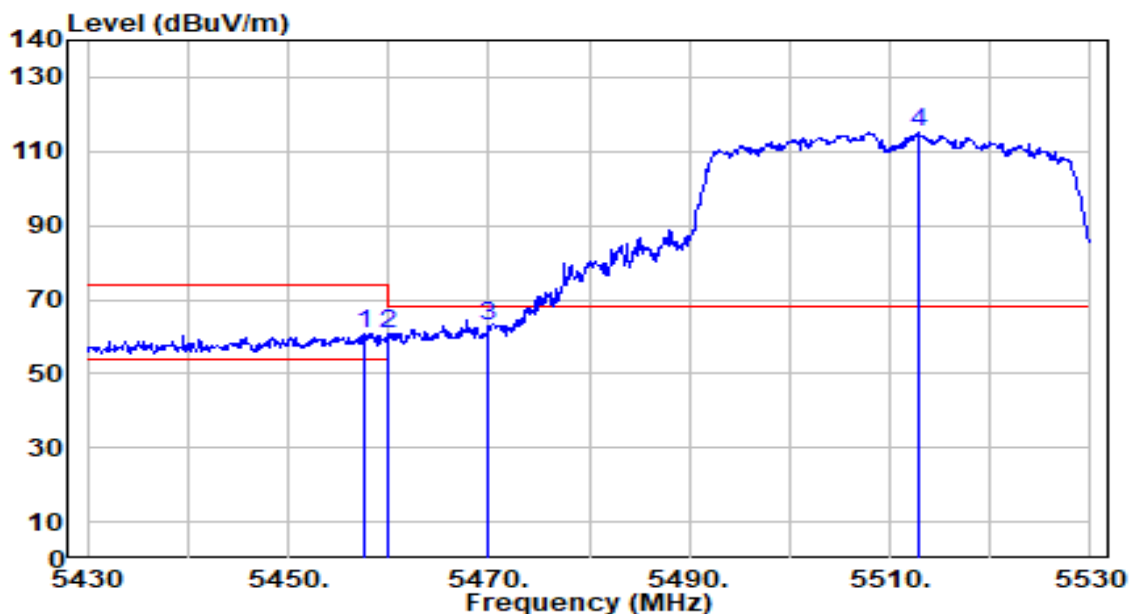


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.700	59.01	1.86	60.87	-13.13	74.00	200	154	Peak
2	5460.000	58.91	1.87	60.78	-13.22	74.00	200	154	Peak
3	* 5470.000	61.16	1.92	63.08	-5.12	68.20	200	154	Peak
4	5513.000	112.90	2.10	115.01	N/A	N/A	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

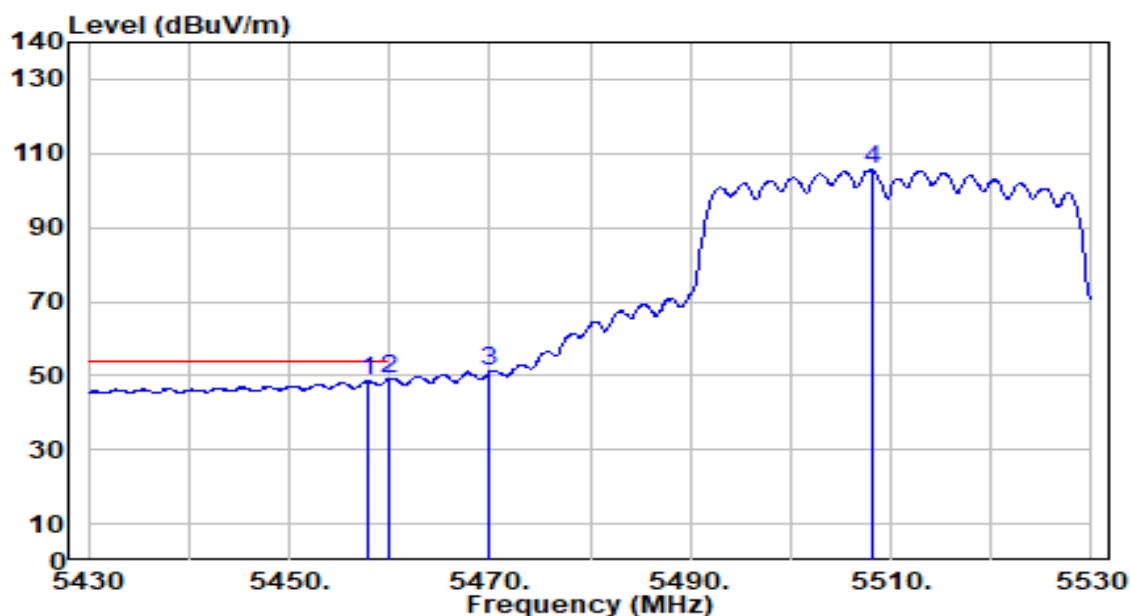


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5457.900	46.86	1.86	48.72	-5.28	54.00	200	154	Average
2	*	5460.000	47.35	1.87	49.22	-4.78	54.00	200	154	Average
3		5470.000	49.24	1.92	51.15	N/A	N/A	200	154	Average
4		5508.100	103.36	2.08	105.44	N/A	N/A	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+3	Test Voltage	AC 120V/60Hz

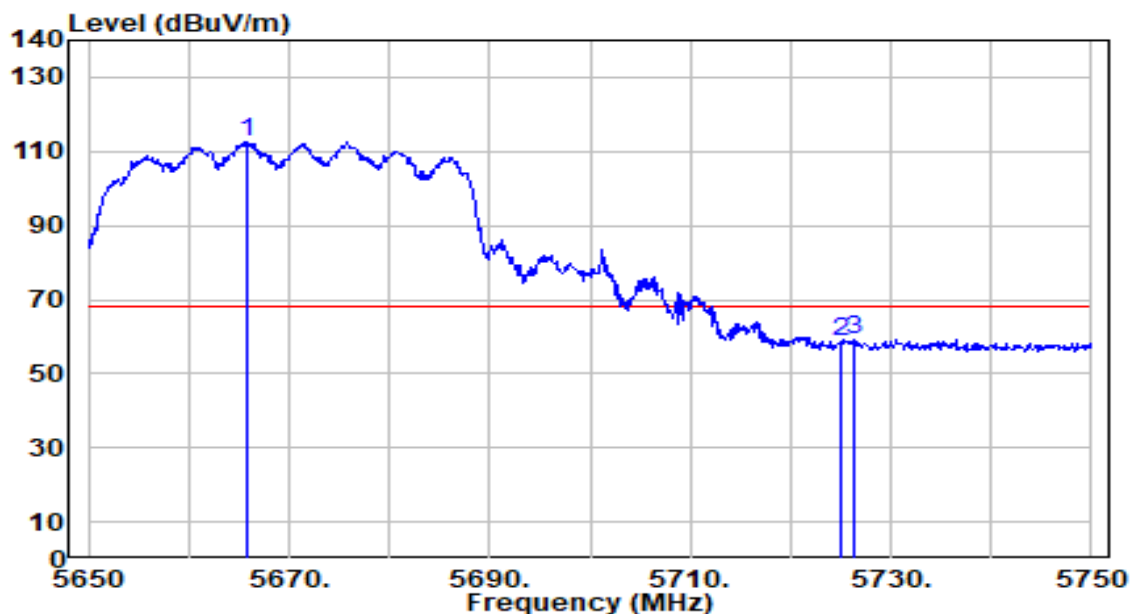


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.700	109.79	2.85	112.64	N/A	N/A	208	353	Peak
2	5725.000	55.62	3.14	58.76	-9.44	68.20	208	353	Peak
3	* 5726.300	55.91	3.15	59.06	-9.14	68.20	208	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1+3	Test Voltage	AC 120V/60Hz

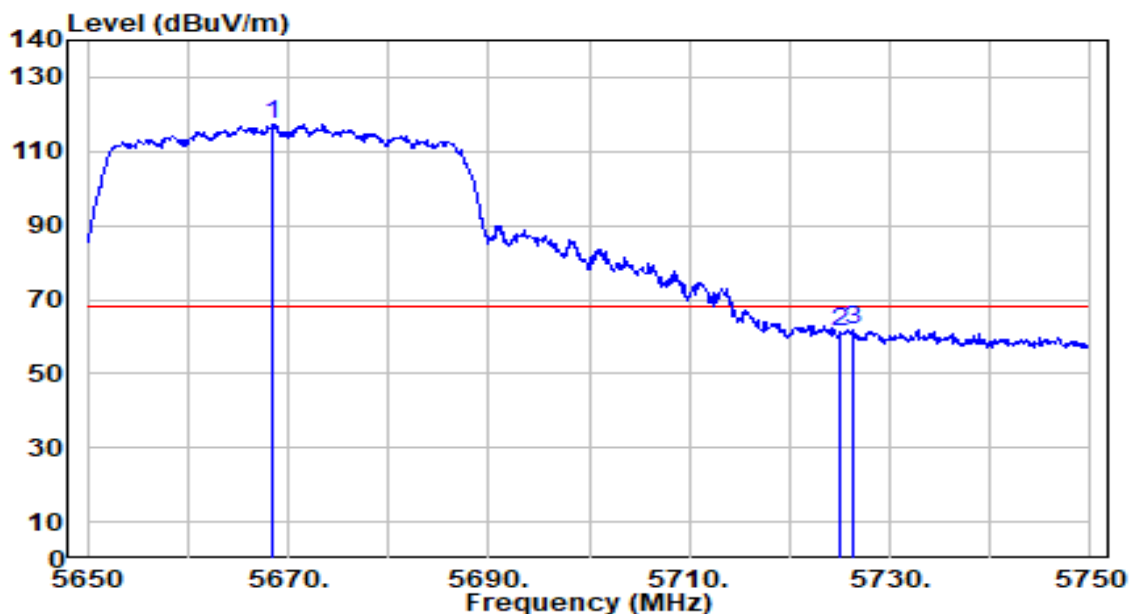


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.500	114.37	2.87	117.23	N/A	N/A	190	350	Peak
2	5725.000	58.22	3.14	61.36	-6.84	68.20	190	350	Peak
3	* 5726.400	58.91	3.15	62.06	-6.14	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+3	Test Voltage	AC 120V/60Hz

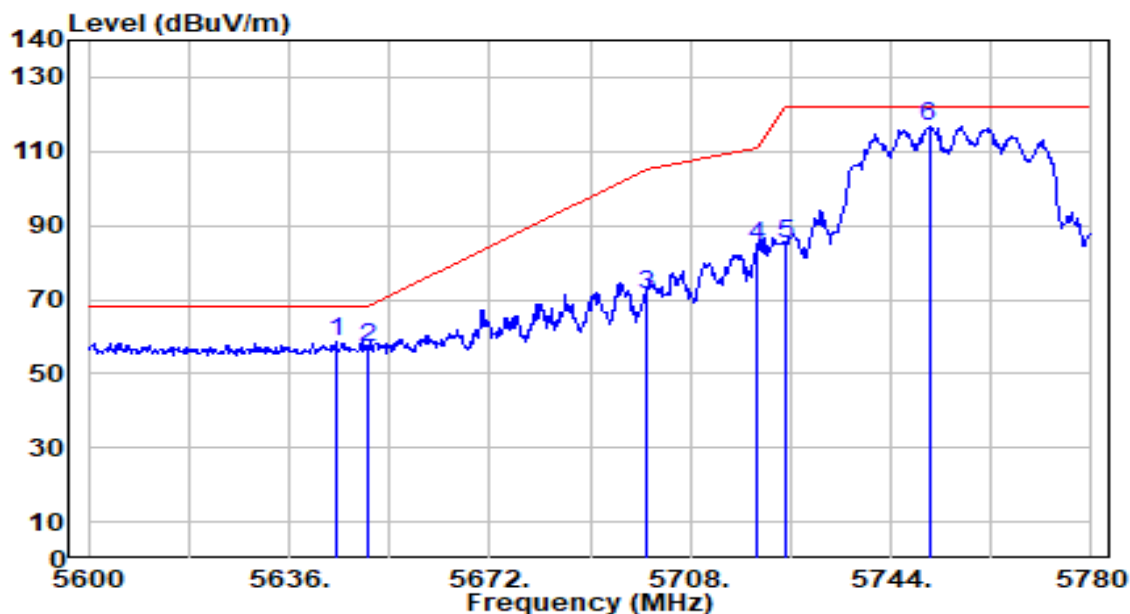


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.460	55.68	2.75	58.43	-9.77	68.20	206	355	Peak
2		5650.000	54.26	2.78	57.04	-11.16	68.20	206	355	Peak
3		5700.000	68.19	3.02	71.20	-34.00	105.20	206	355	Peak
4		5720.000	81.29	3.12	84.41	-26.39	110.80	206	355	Peak
5		5725.000	81.91	3.14	85.06	-37.14	122.20	206	355	Peak
6		5750.840	113.56	3.27	116.83	N/A	N/A	206	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1+3	Test Voltage	AC 120V/60Hz

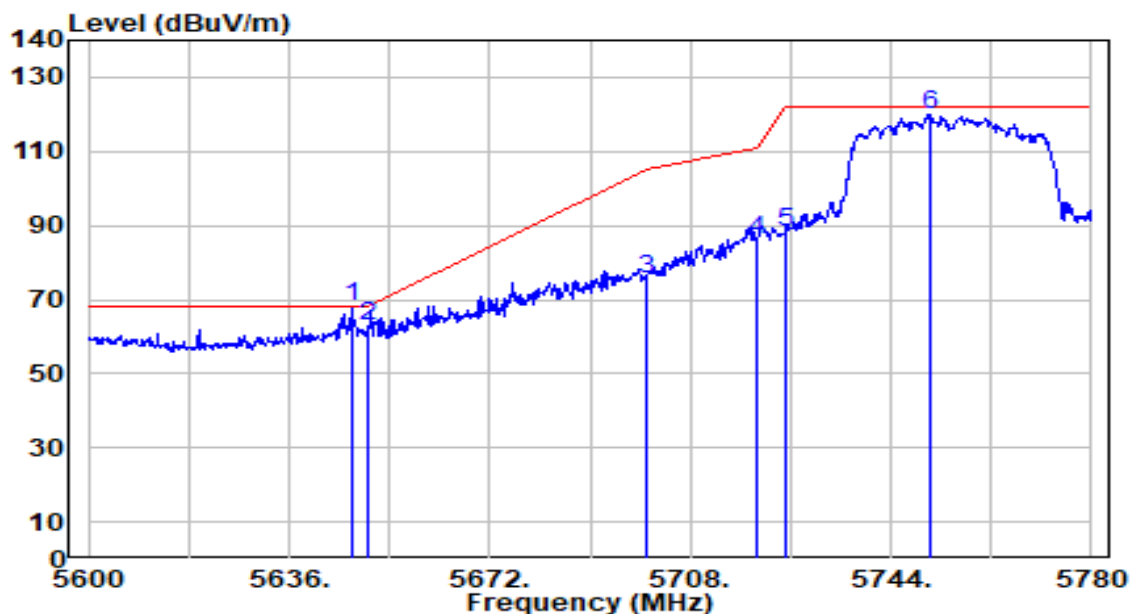


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.160	65.21	2.76	67.98	-0.22	68.20	202	347	Peak
2		5650.000	60.00	2.78	62.78	-5.42	68.20	202	347	Peak
3		5700.000	72.39	3.02	75.40	-29.80	105.20	202	347	Peak
4		5720.000	82.98	3.12	86.10	-24.70	110.80	202	347	Peak
5		5725.000	84.99	3.14	88.13	-34.07	122.20	202	347	Peak
6		5751.200	116.81	3.27	120.08	N/A	N/A	202	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+3	Test Voltage	AC 120V/60Hz

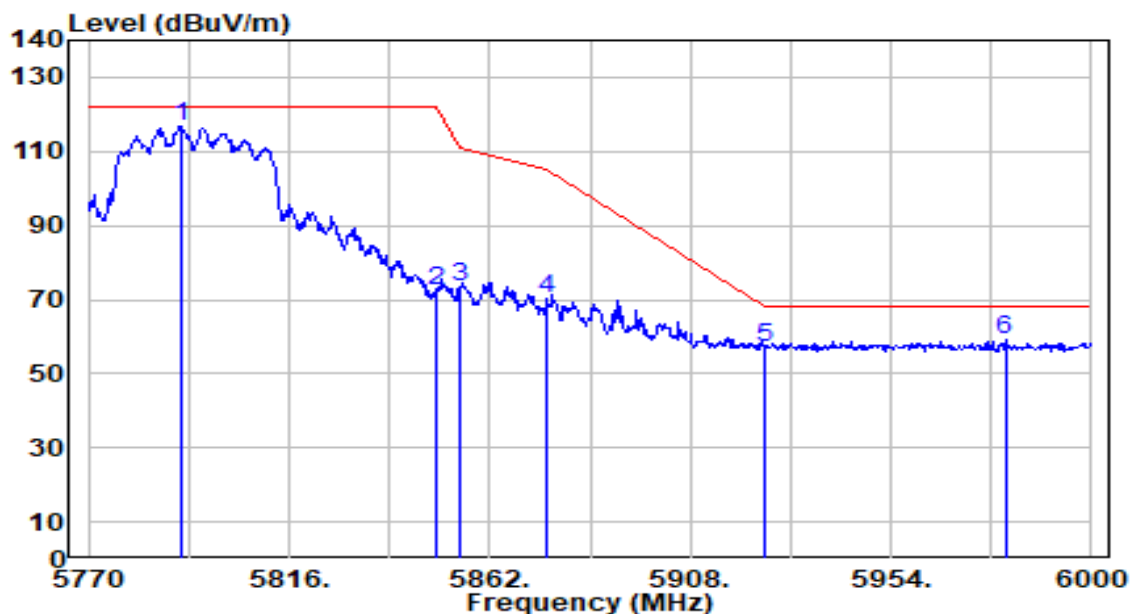


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5791.160	113.11	3.47	116.58	N/A	N/A	196	360	Peak
2	5850.000	68.87	3.51	72.38	-49.82	122.20	196	360	Peak
3	5855.000	69.79	3.51	73.30	-37.50	110.80	196	360	Peak
4	5875.000	66.64	3.50	70.15	-35.05	105.20	196	360	Peak
5	5925.000	53.67	3.51	57.18	-11.02	68.20	196	360	Peak
6	* 5980.220	55.42	3.53	58.96	-9.24	68.20	196	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1+3	Test Voltage	AC 120V/60Hz

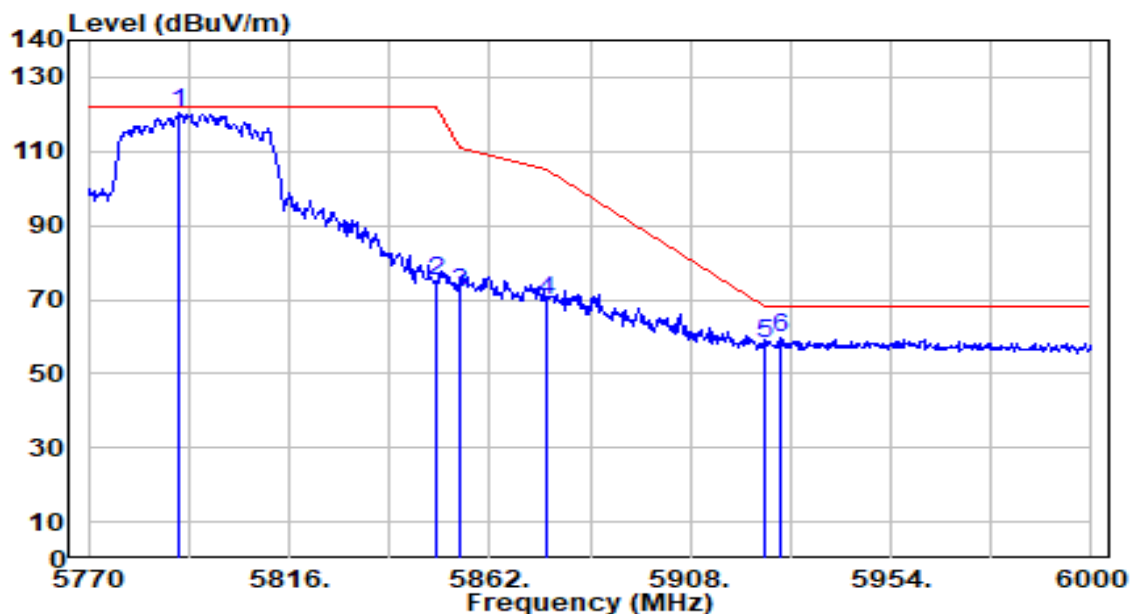


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.930	117.18	3.47	120.65	N/A	N/A	182	346	Peak
2	5850.000	71.25	3.51	74.76	-47.44	122.20	182	346	Peak
3	5855.000	68.41	3.51	71.92	-38.88	110.80	182	346	Peak
4	5875.000	66.09	3.50	69.60	-35.60	105.20	182	346	Peak
5	5925.000	54.57	3.51	58.09	-10.11	68.20	182	346	Peak
6	* 5928.470	56.04	3.51	59.55	-8.65	68.20	182	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

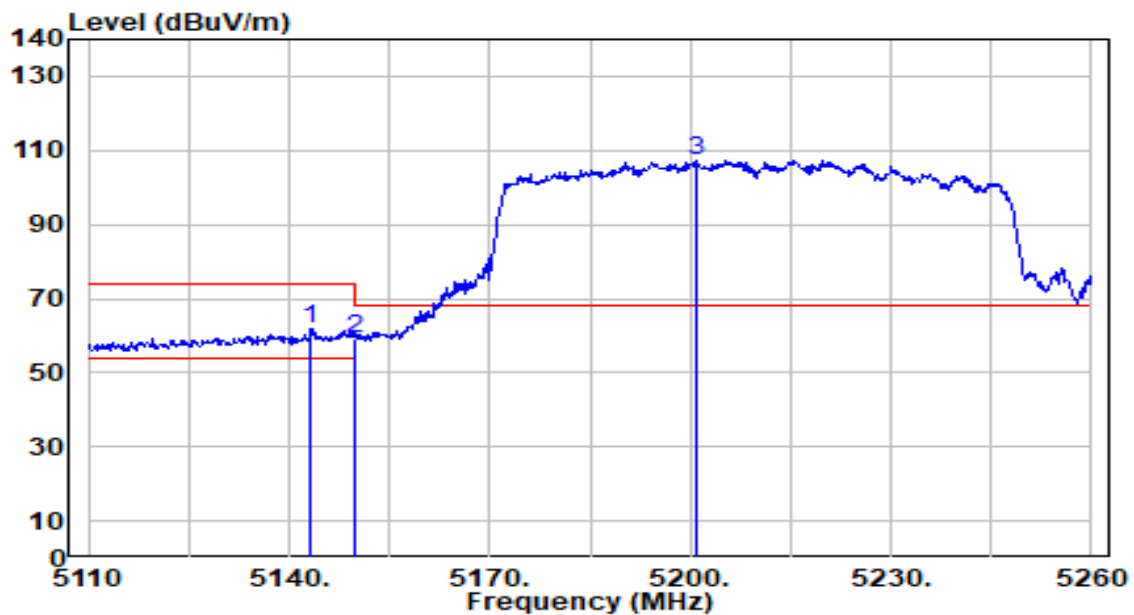


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.300	60.17	1.81	61.98	-12.02	74.00	281	6	Peak
2		5150.000	57.37	1.82	59.18	-14.82	74.00	281	6	Peak
3		5200.750	105.46	1.90	107.37	N/A	N/A	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

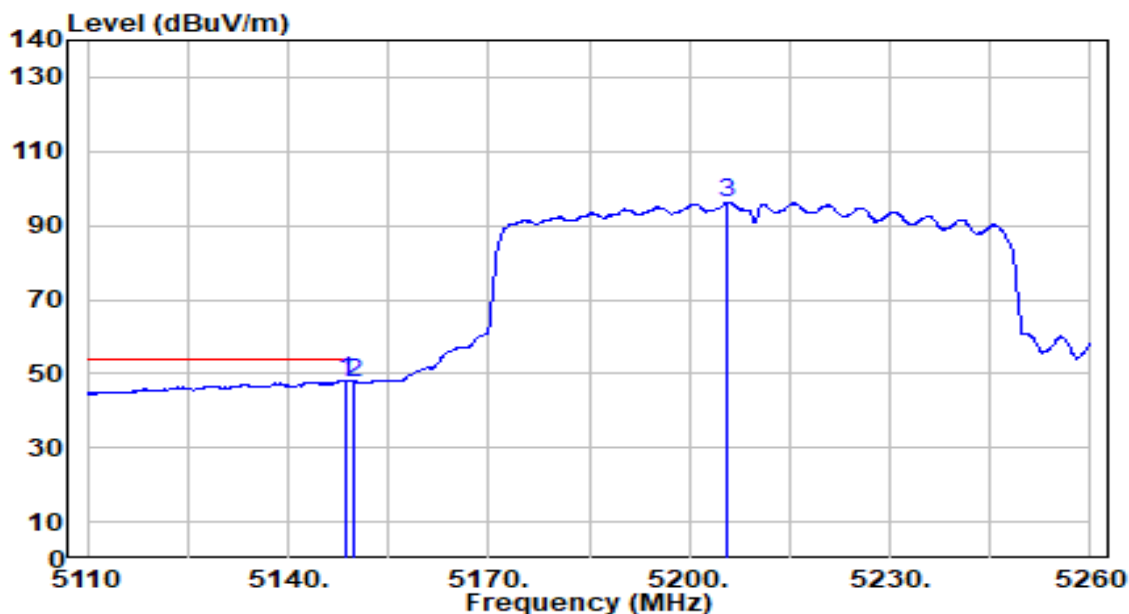


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.550	46.45	1.82	48.27	-5.73	54.00	281	6	Average
2		5150.000	45.87	1.82	47.69	-6.31	54.00	281	6	Average
3		5205.550	94.38	1.89	96.28	N/A	N/A	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

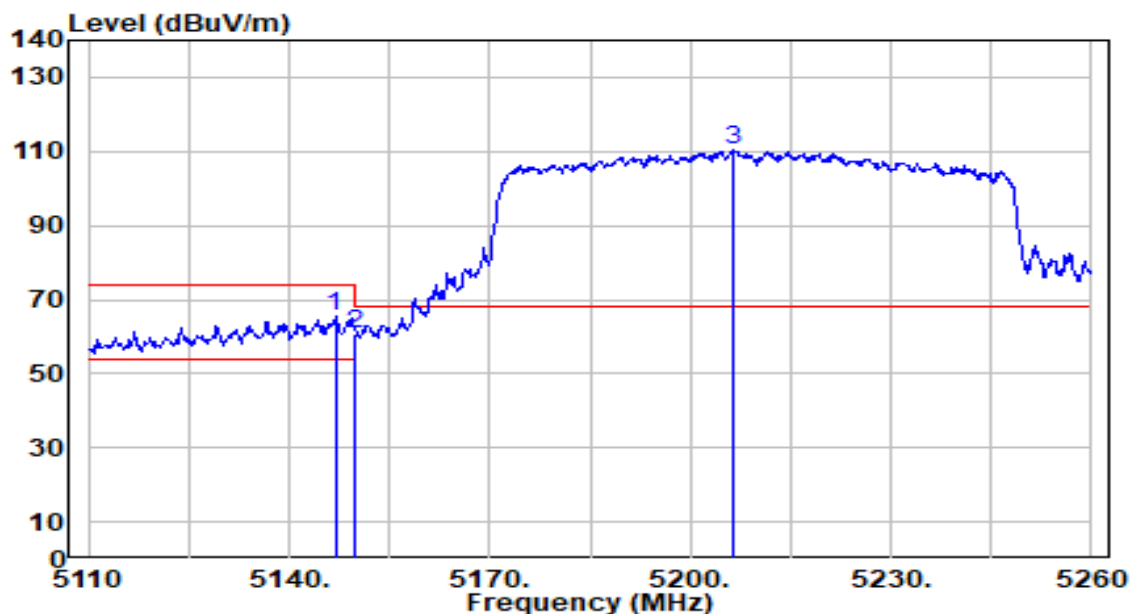


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	63.48	1.81	65.29	-8.71	74.00	136	248	Peak
2		5150.000	59.10	1.82	60.92	-13.08	74.00	136	248	Peak
3		5206.450	108.74	1.89	110.63	N/A	N/A	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

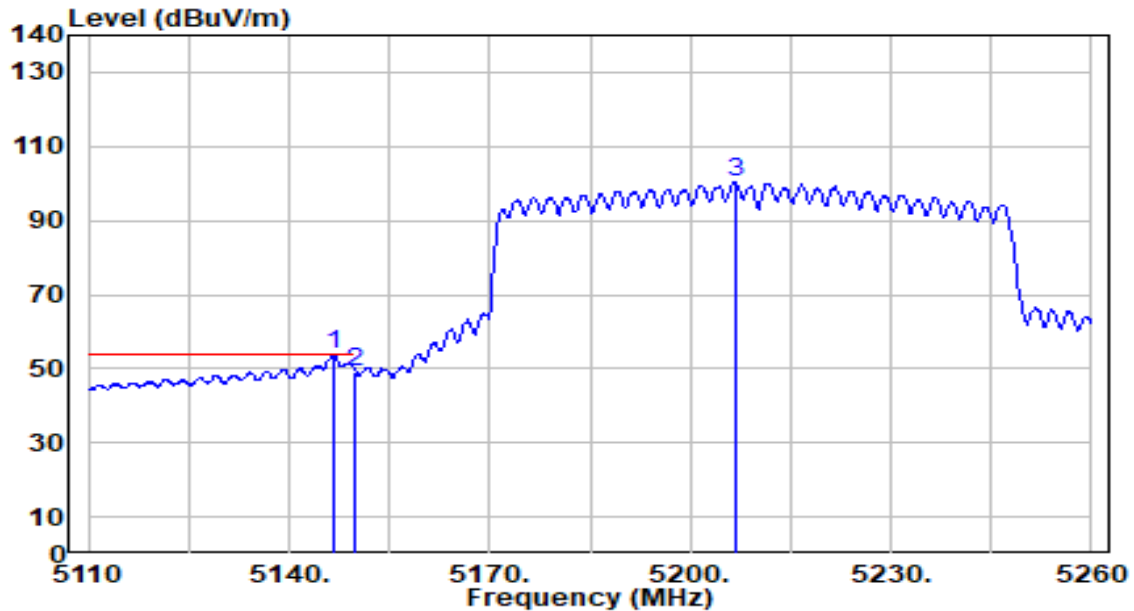


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.750	51.97	1.81	53.79	-0.21	54.00	136	248	Average
2		5150.000	47.05	1.82	48.87	-5.13	54.00	136	248	Average
3		5206.750	98.44	1.89	100.33	N/A	N/A	136	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

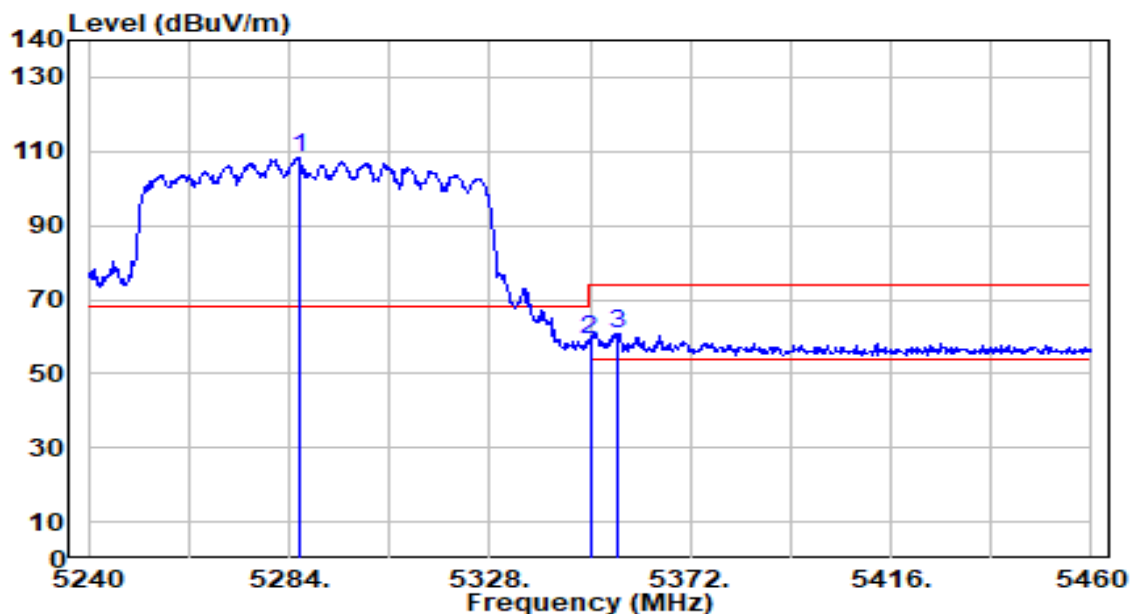


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.200	106.46	1.78	108.24	N/A	N/A	288	1	Peak
2	5350.000	57.51	1.69	59.20	-14.80	74.00	288	1	Peak
3	* 5355.940	59.29	1.68	60.97	-13.03	74.00	288	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

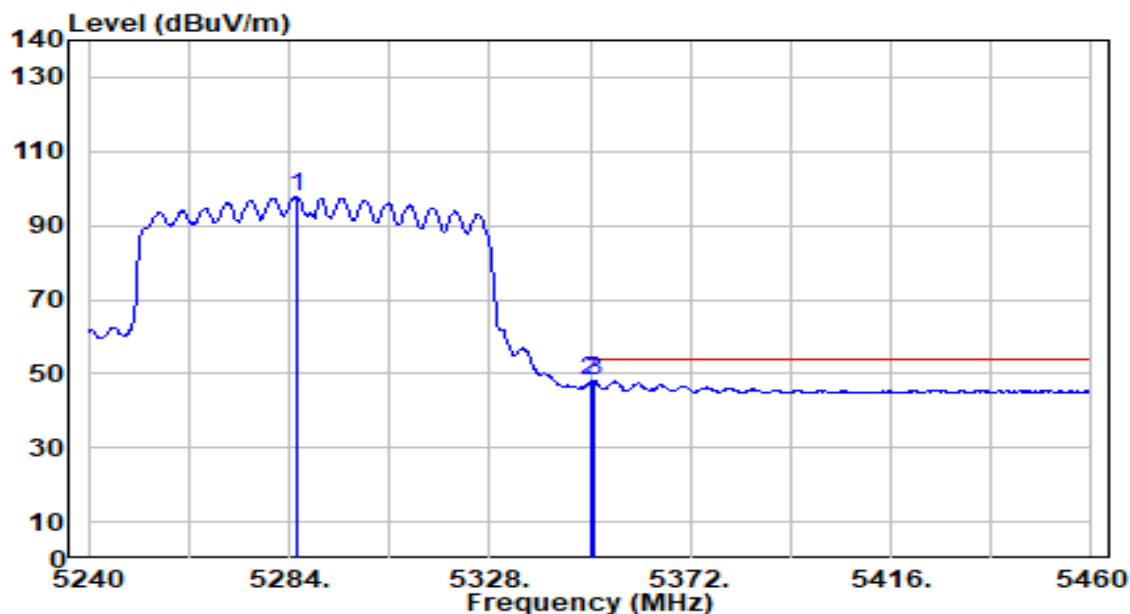


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5285.540	96.20	1.78	97.98	N/A	N/A	288	1	Average
2	5350.000	46.13	1.69	47.82	-6.18	54.00	288	1	Average
3	* 5350.880	46.27	1.69	47.96	-6.04	54.00	288	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

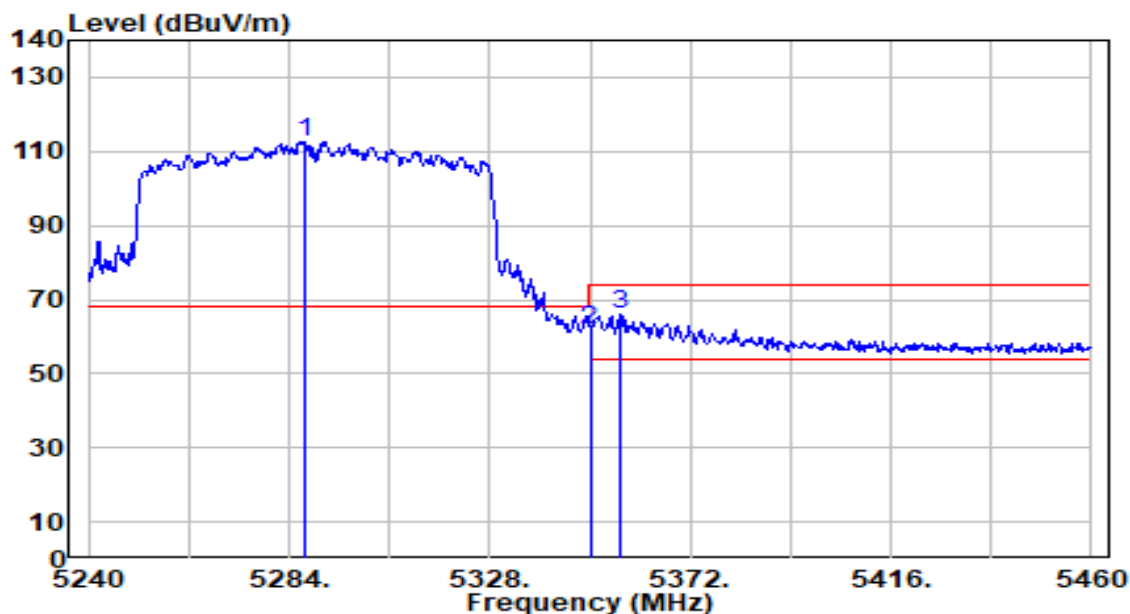


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5287.520	110.99	1.78	112.77	N/A	N/A	173	151	Peak
2	5350.000	60.15	1.69	61.84	-12.16	74.00	173	151	Peak
3	* 5356.380	64.23	1.68	65.91	-8.09	74.00	173	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

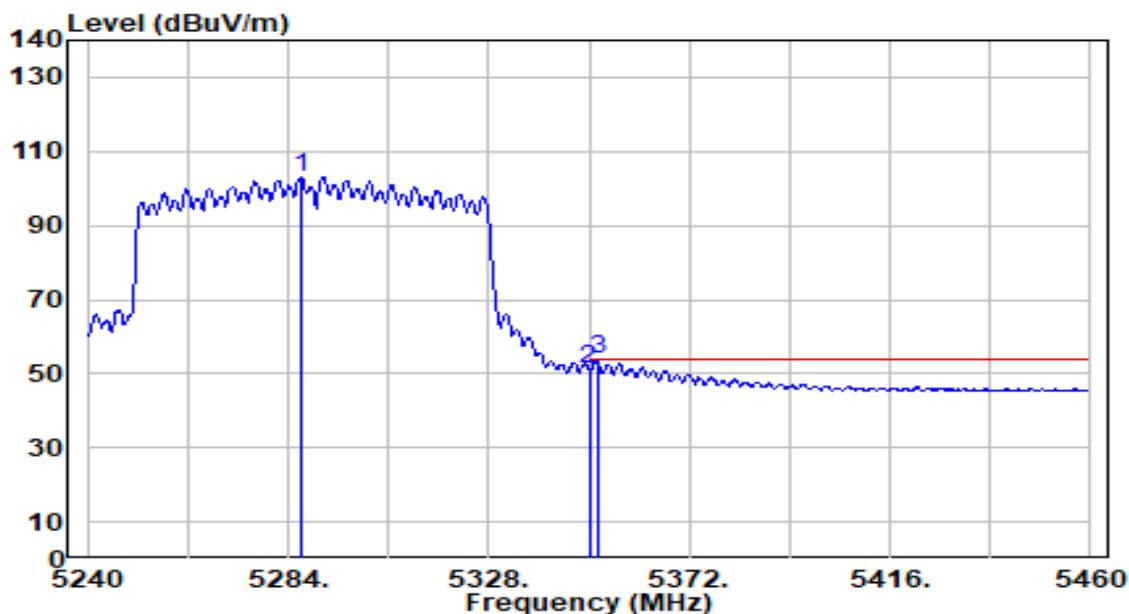


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5286.860	101.40	1.78	103.18	N/A	N/A	173	151	Average
2	5350.000	49.35	1.69	51.04	-2.96	54.00	173	151	Average
3	* 5351.760	52.05	1.69	53.74	-0.26	54.00	173	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

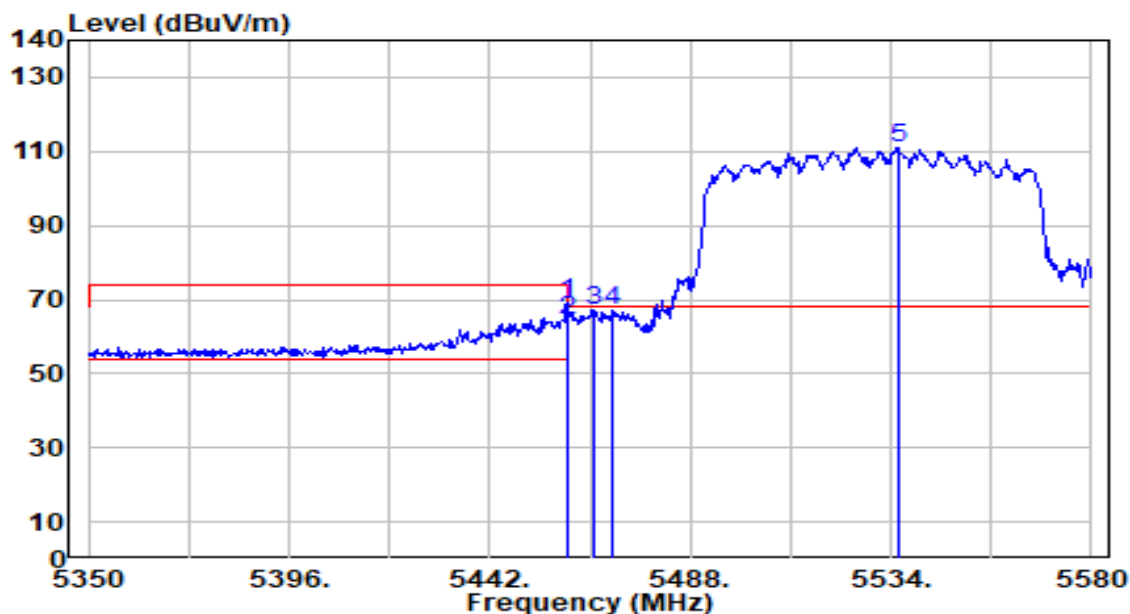


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5459.710	67.27	1.87	69.14	-4.86	74.00	208	206	Peak
2	5460.000	62.59	1.87	64.46	-9.54	74.00	208	206	Peak
3	* 5465.690	65.32	1.90	67.22	-0.98	68.20	208	206	Peak
4	5470.000	65.15	1.92	67.06	-1.14	68.20	208	206	Peak
5	5535.840	108.68	2.22	110.90	N/A	N/A	208	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

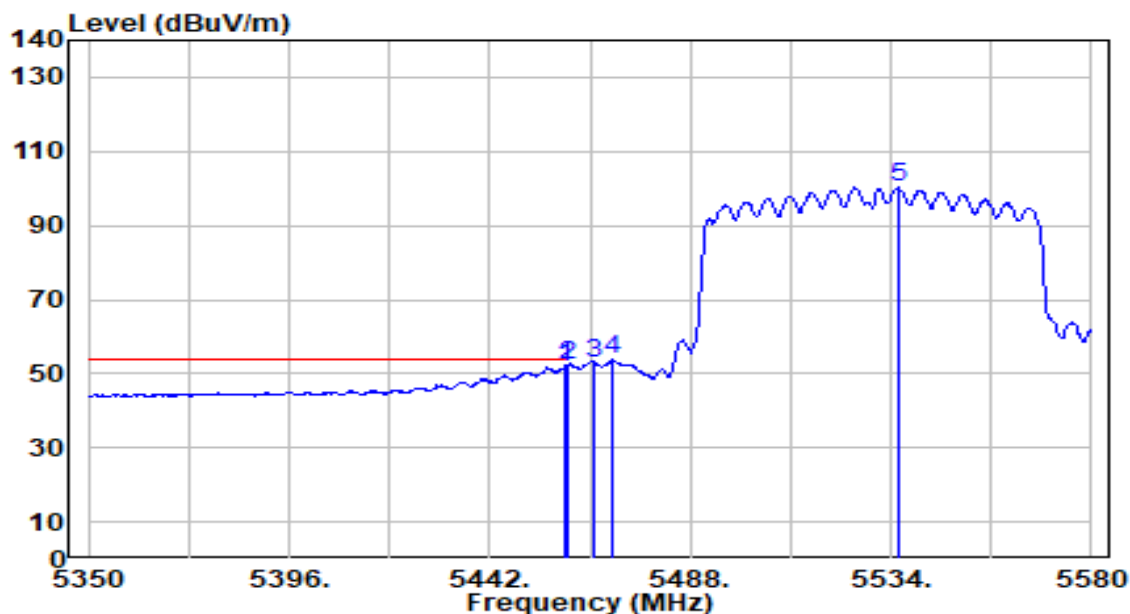


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5459.020	49.86	1.87	51.73	-2.27	54.00	208	206	Average
2	*	5460.000	50.43	1.87	52.30	-1.70	54.00	208	206	Average
3		5465.920	51.13	1.90	53.03	N/A	N/A	208	206	Average
4		5470.000	51.79	1.92	53.71	N/A	N/A	208	206	Average
5		5535.840	97.94	2.22	100.15	N/A	N/A	208	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

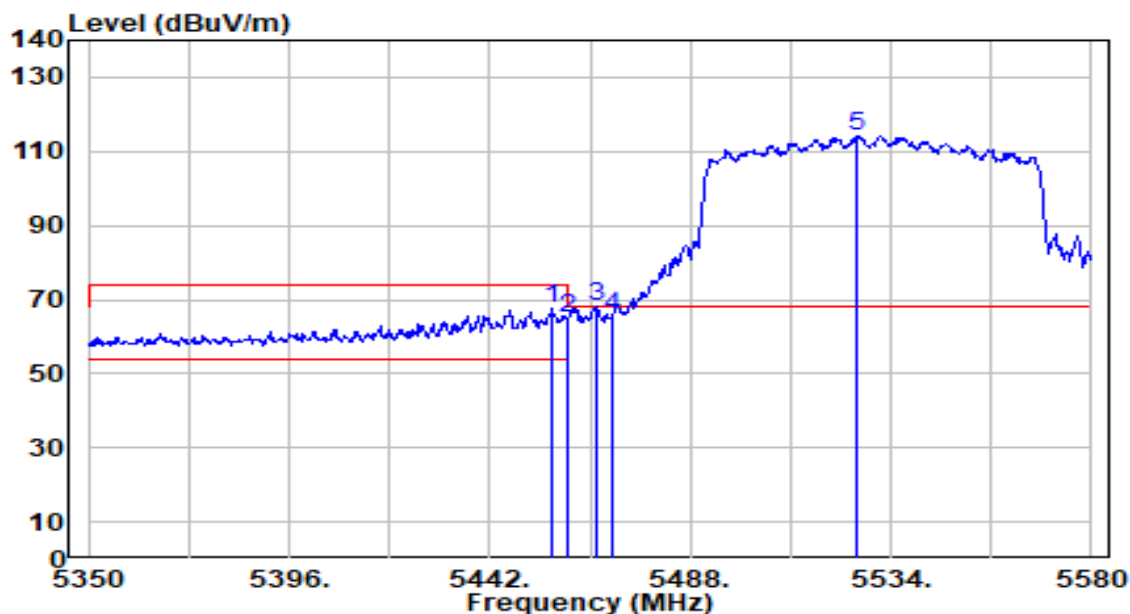


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.260	65.94	1.86	67.80	-6.20	74.00	200	154	Peak
2	5460.000	62.92	1.87	64.79	-9.21	74.00	200	154	Peak
3	* 5466.380	66.08	1.90	67.98	-0.22	68.20	200	154	Peak
4	5470.000	63.55	1.92	65.47	-2.73	68.20	200	154	Peak
5	5526.410	111.92	2.17	114.09	N/A	N/A	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

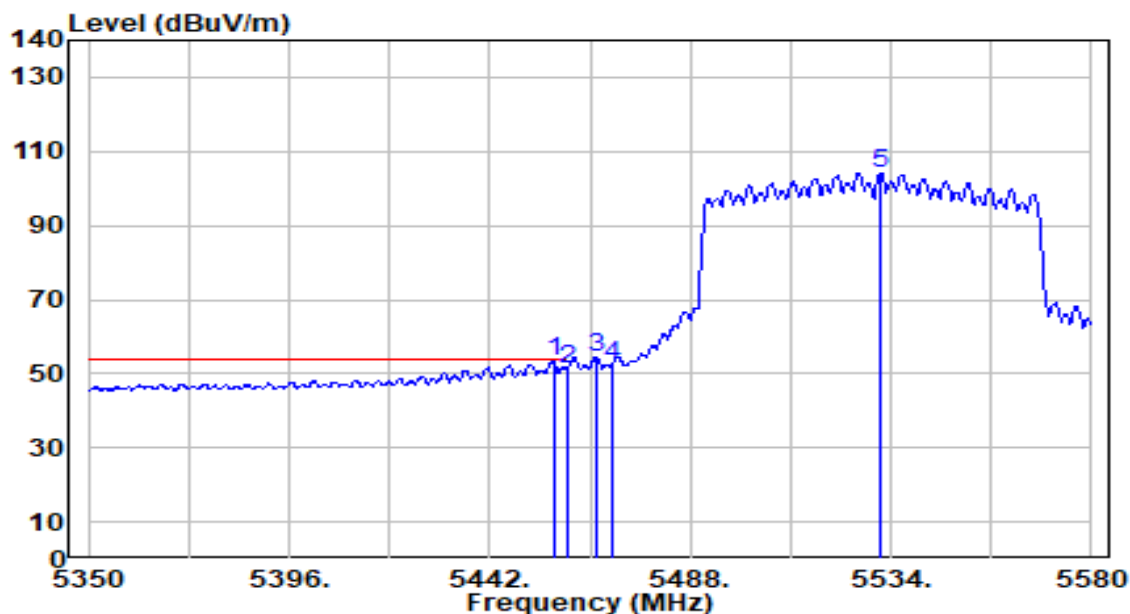


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.720	51.49	1.86	53.35	-0.65	54.00	200	154	Average
2		5460.000	49.22	1.87	51.10	-2.90	54.00	200	154	Average
3		5466.380	52.59	1.90	54.49	N/A	N/A	200	154	Average
4		5470.000	50.28	1.92	52.19	N/A	N/A	200	154	Average
5		5531.700	102.08	2.20	104.28	N/A	N/A	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+3	Test Voltage	AC 120V/60Hz

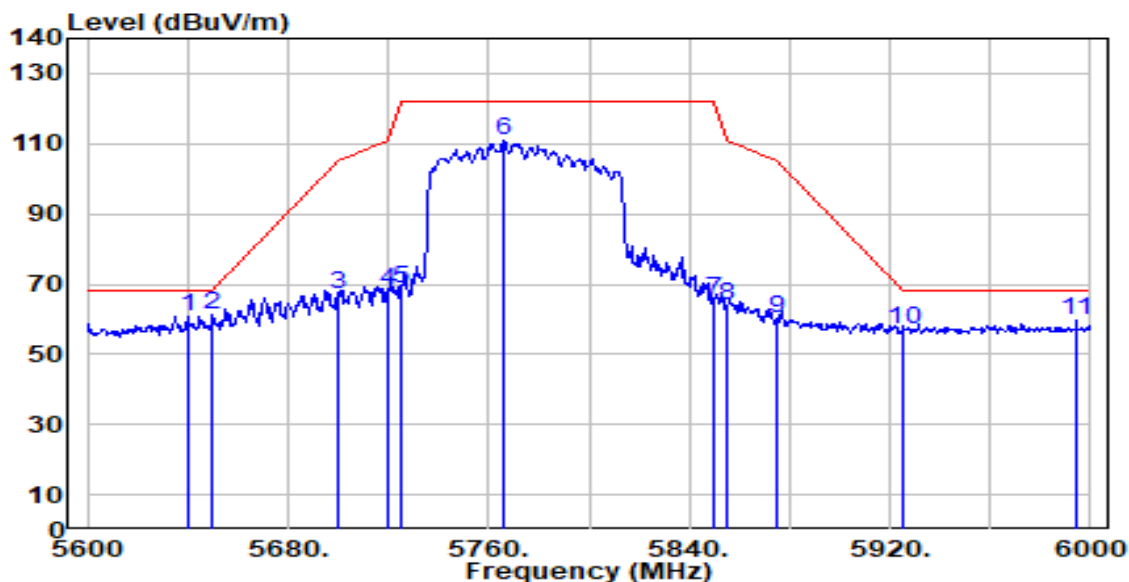


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5640.000	58.16	2.73	60.88	-7.32	68.20	206	355	Peak
2	* 5650.000	58.66	2.78	61.44	-6.76	68.20	206	355	Peak
3	5700.000	64.21	3.02	67.23	-37.97	105.20	206	355	Peak
4	5720.000	64.84	3.12	67.95	-42.85	110.80	206	355	Peak
5	5725.000	65.54	3.14	68.68	-53.52	122.20	206	355	Peak
6	5766.400	107.47	3.35	110.82	N/A	N/A	206	355	Peak
7	5850.000	61.83	3.51	65.34	-56.86	122.20	206	355	Peak
8	5855.000	60.26	3.51	63.76	-47.04	110.80	206	355	Peak
9	5875.000	56.50	3.50	60.01	-45.19	105.20	206	355	Peak
10	5925.000	53.76	3.51	57.27	-10.93	68.20	206	355	Peak
11	5994.400	55.94	3.54	59.47	-8.73	68.20	206	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1+3	Test Voltage	AC 120V/60Hz

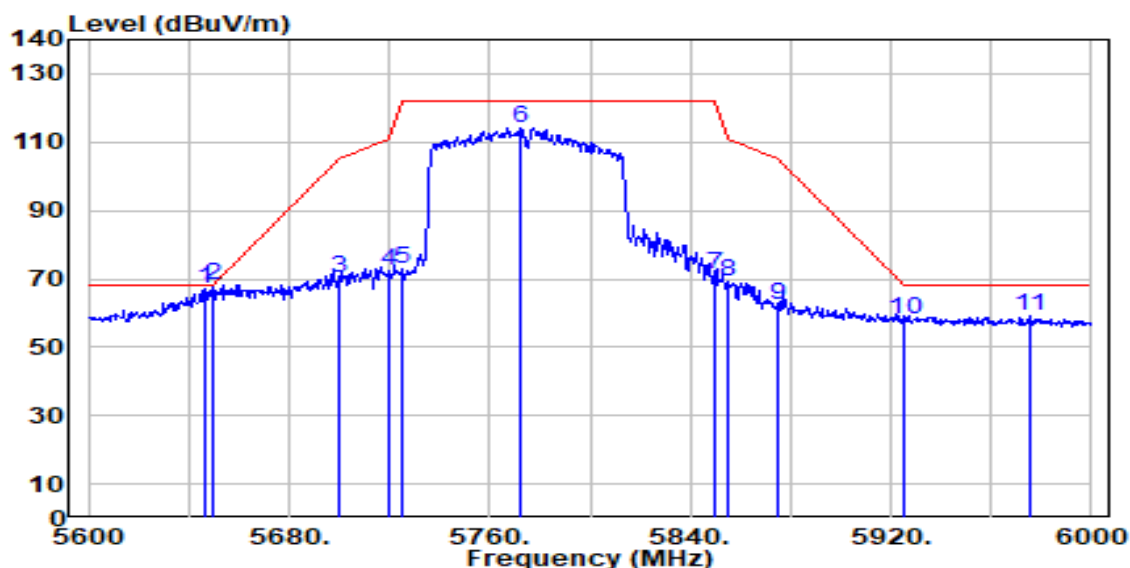


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5646.800	64.15	2.76	66.91	-1.29	68.20	202	347	Peak
2	* 5650.000	65.14	2.78	67.92	-0.28	68.20	202	347	Peak
3	5700.000	67.47	3.02	70.49	-34.71	105.20	202	347	Peak
4	5720.000	69.05	3.12	72.17	-38.63	110.80	202	347	Peak
5	5725.000	69.71	3.14	72.85	-49.35	122.20	202	347	Peak
6	5772.400	110.67	3.38	114.04	N/A	N/A	202	347	Peak
7	5850.000	67.66	3.51	71.17	-51.03	122.20	202	347	Peak
8	5855.000	65.84	3.51	69.35	-41.45	110.80	202	347	Peak
9	5875.000	58.64	3.50	62.15	-43.05	105.20	202	347	Peak
10	5925.000	54.84	3.51	58.35	-9.85	68.20	202	347	Peak
11	5975.200	55.76	3.53	59.29	-8.91	68.20	202	347	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

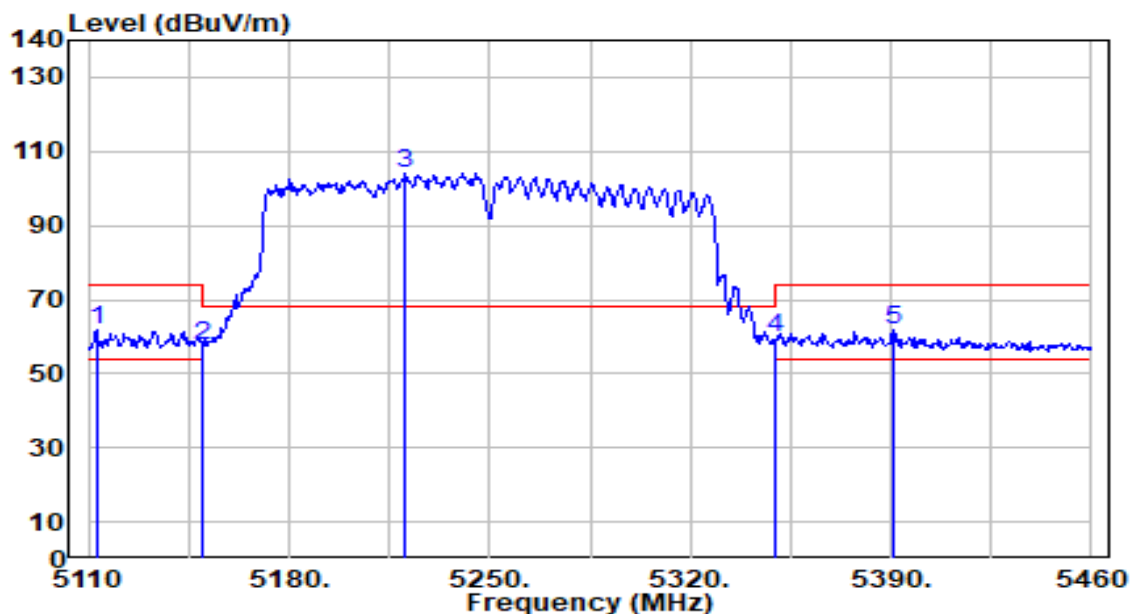


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5112.800	60.21	1.76	61.97	-12.03	74.00	281	6	Peak
2		5150.000	55.69	1.82	57.51	-16.49	74.00	281	6	Peak
3		5220.600	102.44	1.87	104.32	N/A	N/A	281	6	Peak
4		5350.000	58.08	1.69	59.77	-14.23	74.00	281	6	Peak
5		5391.050	60.22	1.64	61.85	-12.15	74.00	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

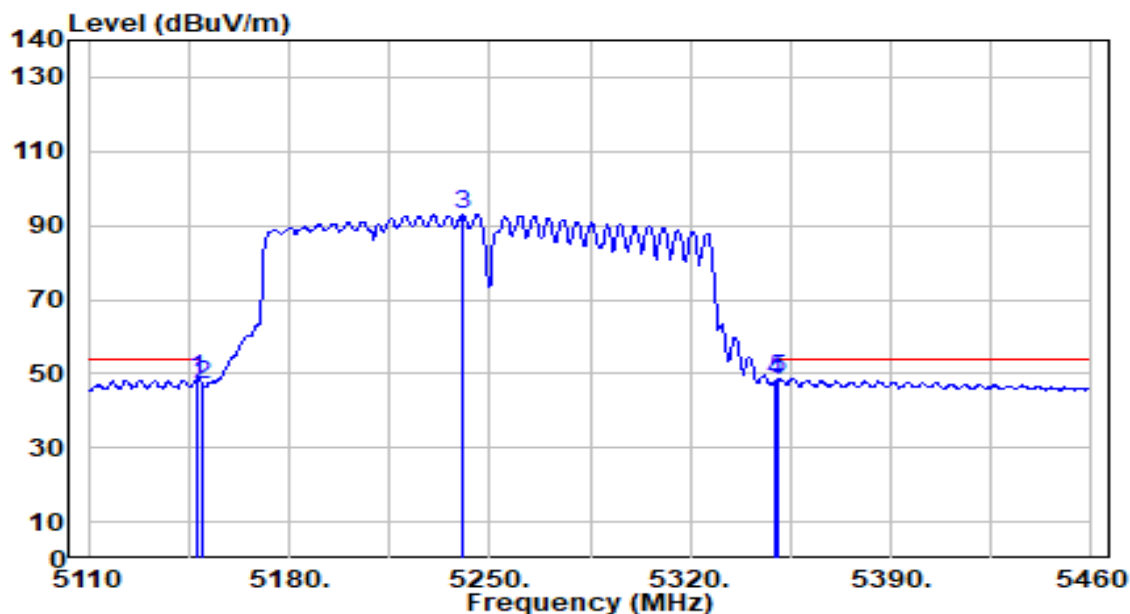


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.150	46.70	1.82	48.51	-5.49	54.00	281	6	Average
2		5150.000	45.06	1.82	46.88	-7.12	54.00	281	6	Average
3		5240.200	91.26	1.84	93.10	N/A	N/A	281	6	Average
4		5350.000	46.56	1.69	48.25	-5.75	54.00	281	6	Average
5	*	5350.800	46.93	1.69	48.62	-5.38	54.00	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

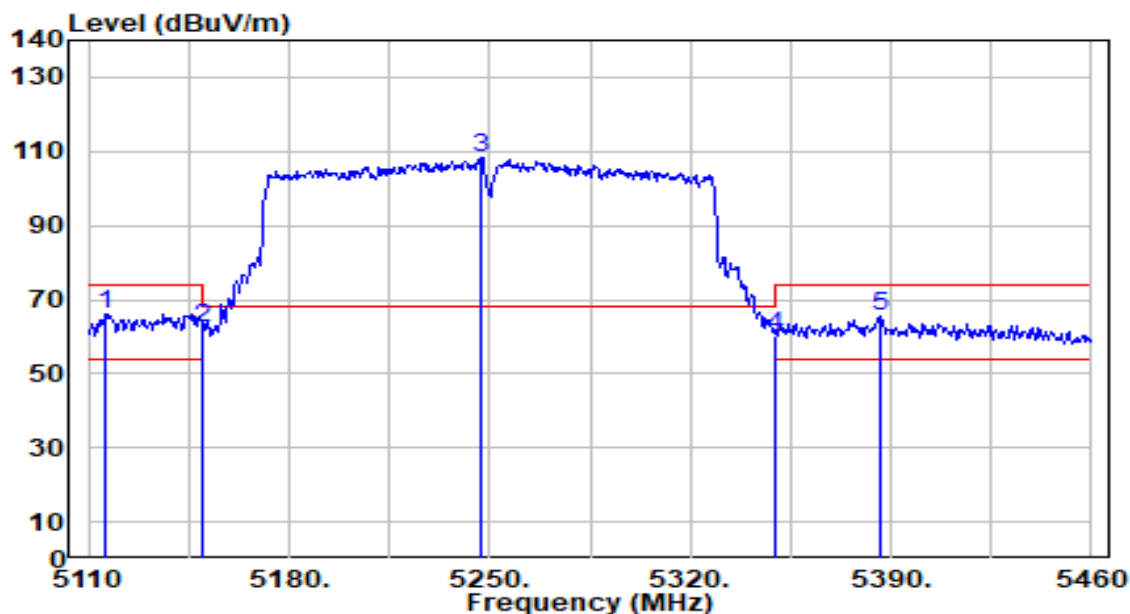


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5115.950	64.33	1.76	66.10	-7.90	74.00	136	248	Peak
2		5150.000	60.26	1.82	62.08	-11.92	74.00	136	248	Peak
3		5247.200	106.38	1.83	108.21	N/A	N/A	136	248	Peak
4		5350.000	58.60	1.69	60.29	-13.71	74.00	136	248	Peak
5		5386.150	63.77	1.64	65.41	-8.59	74.00	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

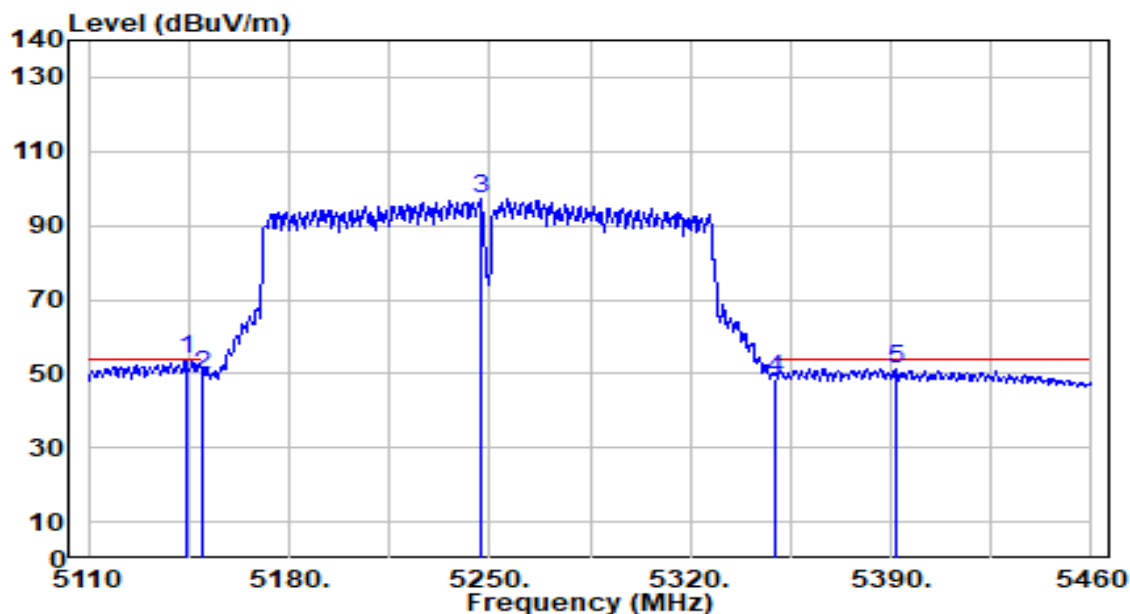


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.950	51.97	1.81	53.78	-0.22	54.00	136	248	Average
2		5150.000	47.59	1.82	49.41	-4.59	54.00	136	248	Average
3		5246.850	95.50	1.83	97.34	N/A	N/A	136	248	Average
4		5350.000	46.76	1.69	48.45	-5.55	54.00	136	248	Average
5		5391.750	49.87	1.64	51.50	-2.50	54.00	136	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+3	Test Voltage	AC 120V/60Hz

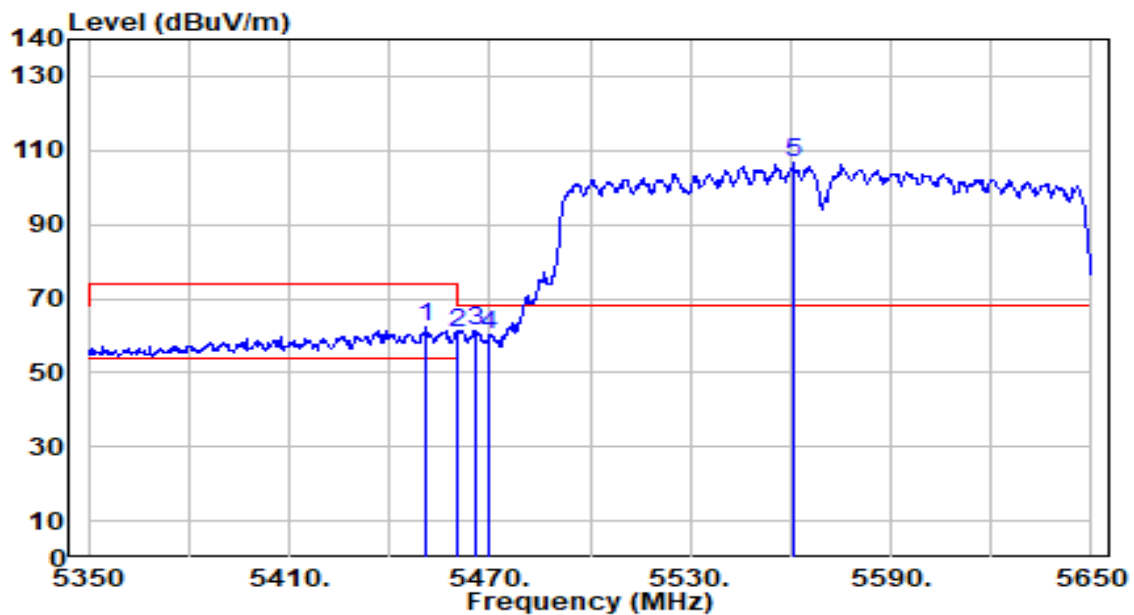


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5450.800	60.25	1.84	62.09	-11.91	74.00	208	206	Peak
2	5460.000	58.63	1.87	60.50	-13.50	74.00	208	206	Peak
3	* 5465.500	59.45	1.90	61.34	-6.86	68.20	208	206	Peak
4	5470.000	58.26	1.92	60.17	-8.03	68.20	208	206	Peak
5	5560.900	104.42	2.34	106.77	N/A	N/A	208	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+3	Test Voltage	AC 120V/60Hz

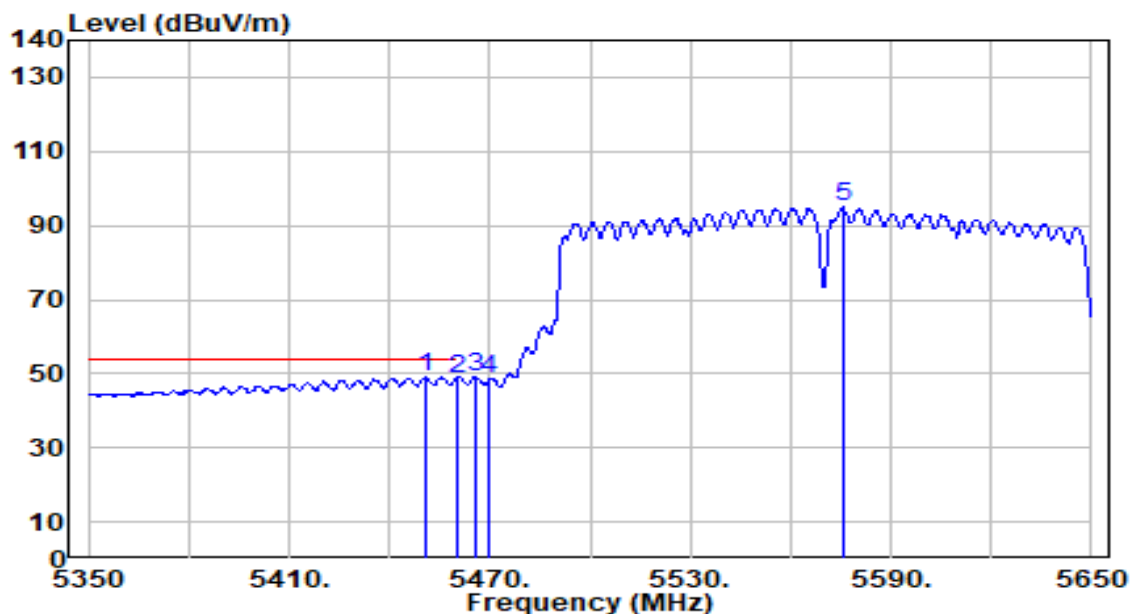


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5450.800	47.39	1.84	49.23	-4.77	54.00	208	206	Average
2		5460.000	46.89	1.87	48.76	-5.24	54.00	208	206	Average
3		5465.500	47.13	1.90	49.02	N/A	N/A	208	206	Average
4		5470.000	46.54	1.92	48.45	N/A	N/A	208	206	Average
5		5575.900	92.47	2.42	94.89	N/A	N/A	208	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+3	Test Voltage	AC 120V/60Hz

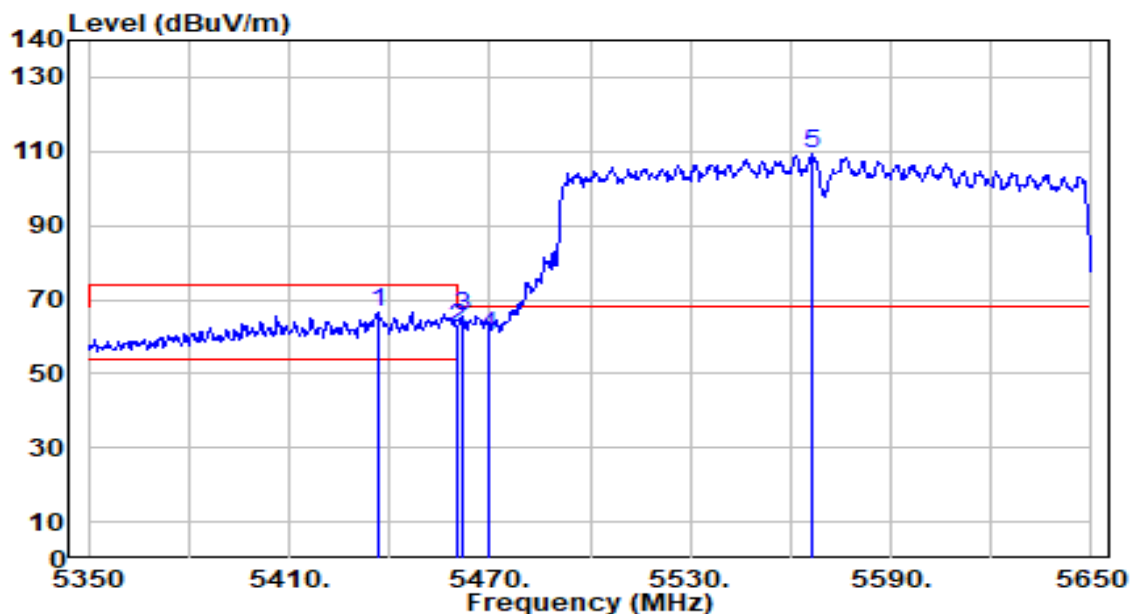


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5436.700	64.80	1.78	66.58	-7.42	74.00	200	154	Peak
2	5460.000	60.36	1.87	62.24	-11.76	74.00	200	154	Peak
3	* 5461.900	63.75	1.88	65.63	-2.57	68.20	200	154	Peak
4	5470.000	58.52	1.92	60.44	-7.76	68.20	200	154	Peak
5	5566.600	106.78	2.37	109.15	N/A	N/A	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1+3	Test Voltage	AC 120V/60Hz

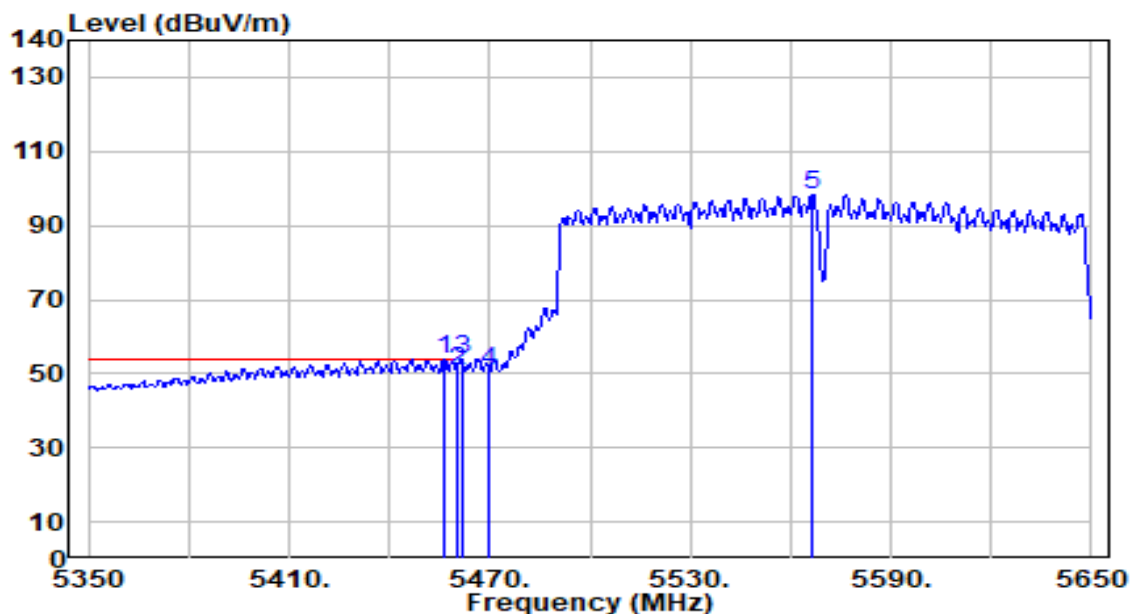


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.200	51.86	1.86	53.72	-0.28	54.00	200	154	Average
2		5460.000	48.91	1.87	50.78	-3.22	54.00	200	154	Average
3		5461.900	51.78	1.88	53.66	N/A	N/A	200	154	Average
4		5470.000	48.97	1.92	50.88	N/A	N/A	200	154	Average
5		5566.600	95.81	2.37	98.18	N/A	N/A	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

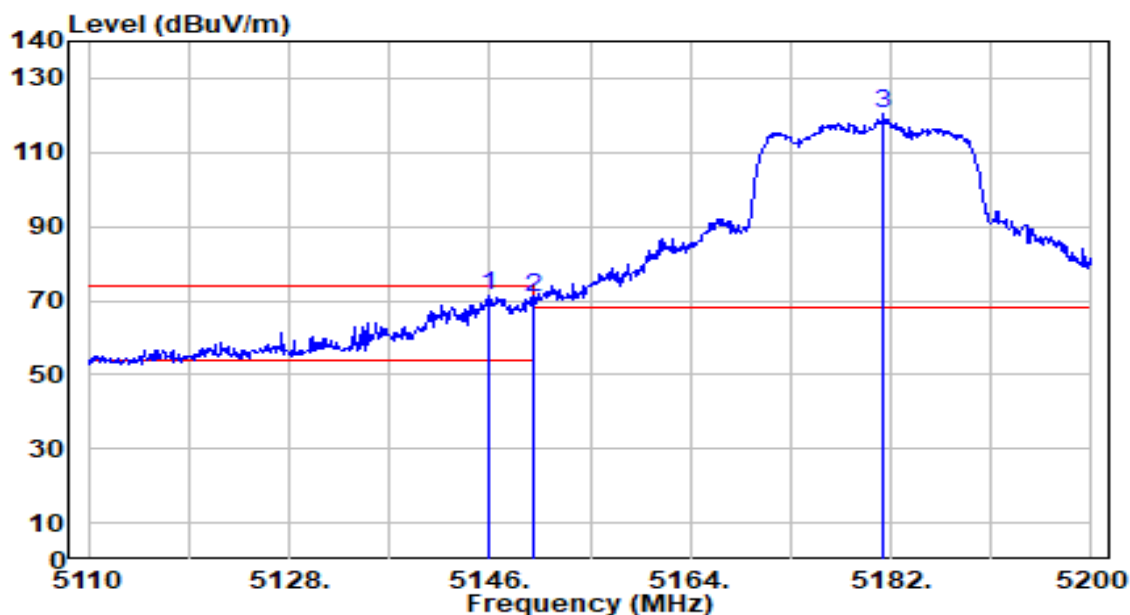


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.000	69.46	1.81	71.27	-2.73	74.00	281	6	Peak
2		5150.000	68.90	1.82	70.72	-3.28	74.00	281	6	Peak
3		5181.280	118.62	1.87	120.49	N/A	N/A	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

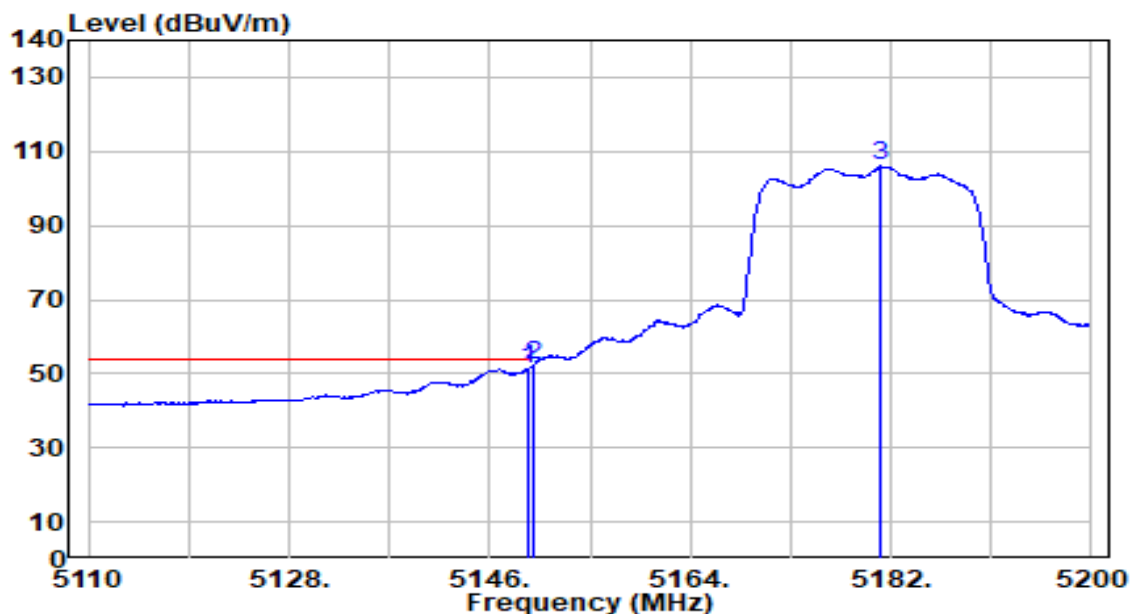


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	49.47	1.82	51.28	-2.72	54.00	281	6	Average
2	*	5150.000	50.65	1.82	52.47	-1.53	54.00	281	6	Average
3		5181.100	104.11	1.87	105.98	N/A	N/A	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

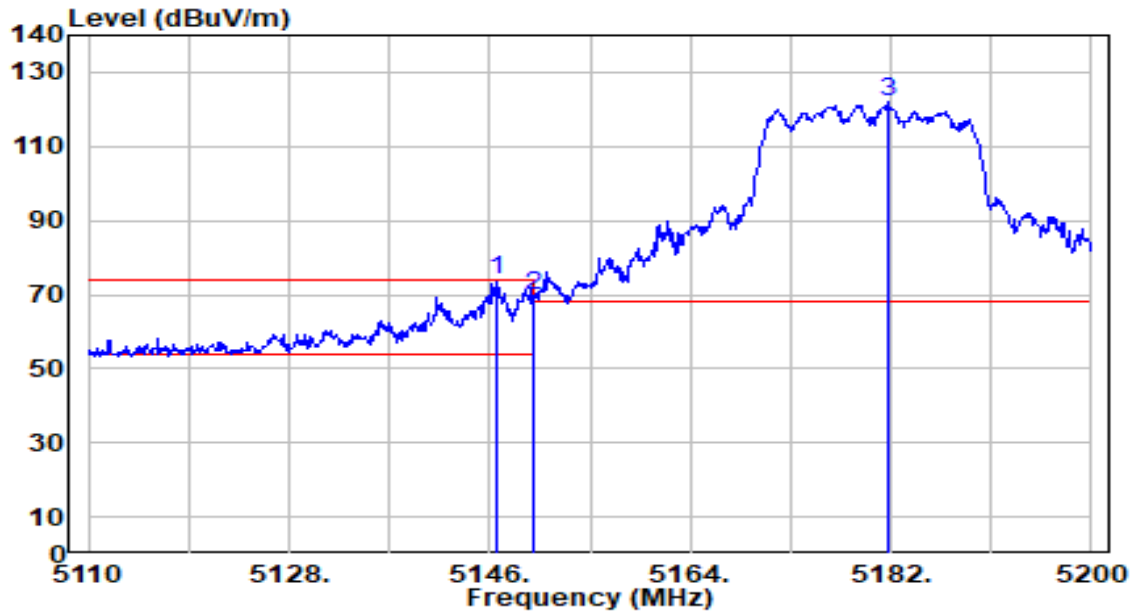


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.720	71.89	1.81	73.71	-0.29	74.00	136	248	Peak
2		5150.000	68.10	1.82	69.92	-4.08	74.00	136	248	Peak
3		5181.820	120.15	1.87	122.02	N/A	N/A	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1+3	Test Voltage	AC 120V/60Hz

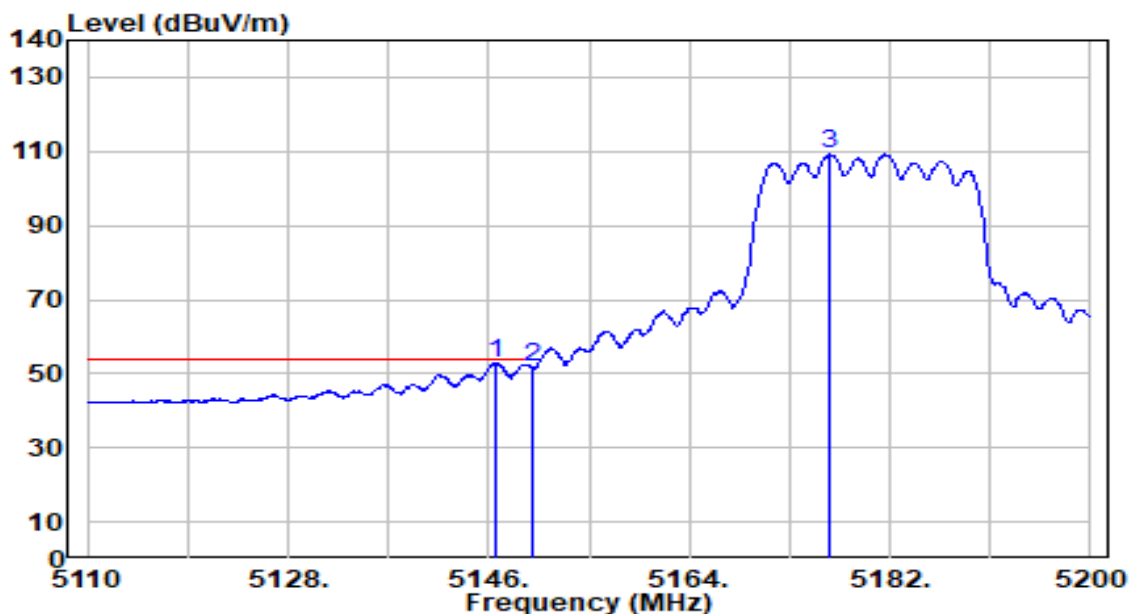


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.720	50.88	1.81	52.70	-1.30	54.00	136	248	Average
2		5150.000	49.84	1.82	51.66	-2.34	54.00	136	248	Average
3		5176.690	107.37	1.86	109.23	N/A	N/A	136	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

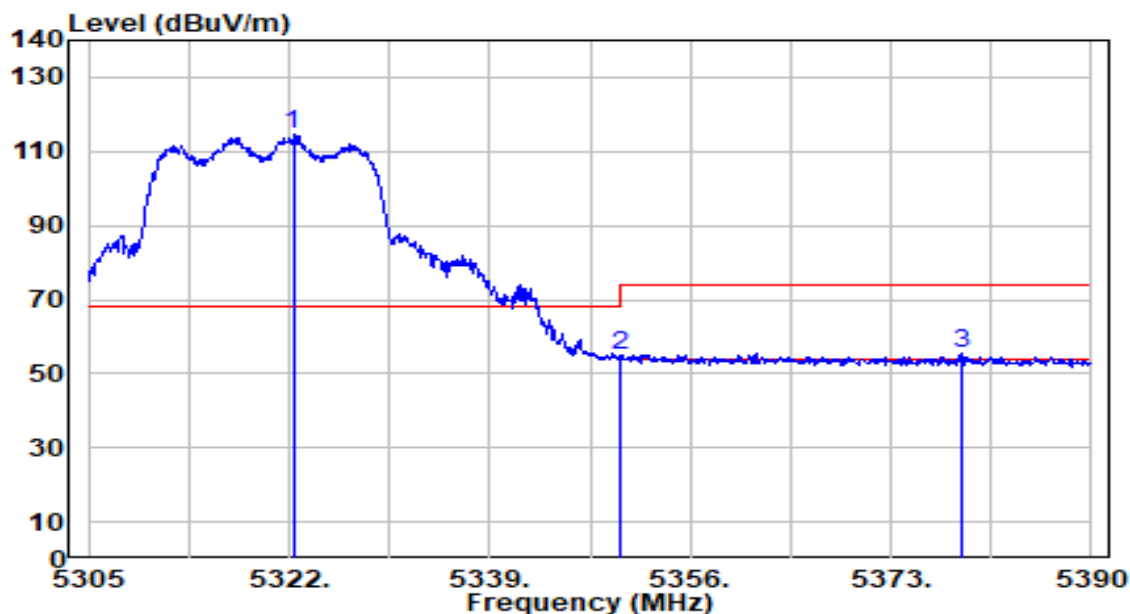


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5322.340	113.08	1.73	114.81	N/A	N/A	288	1	Peak
2	5350.000	53.10	1.69	54.79	-19.21	74.00	288	1	Peak
3	* 5379.035	53.63	1.65	55.28	-18.72	74.00	288	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

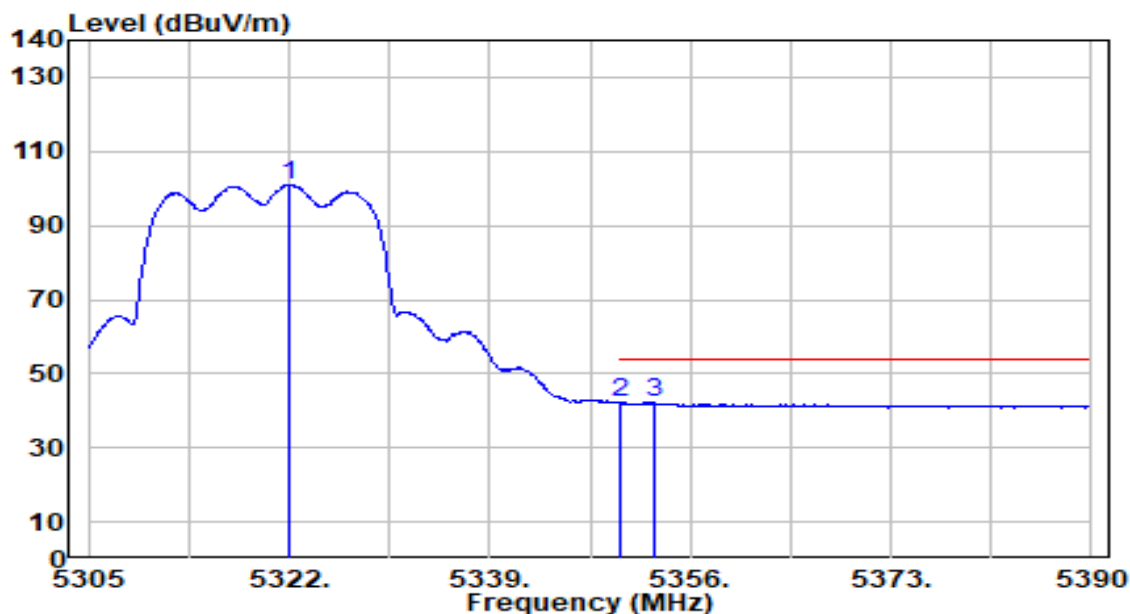


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.915	99.35	1.73	101.08	N/A	N/A	288	1	Average
2	5350.000	40.38	1.69	42.07	-11.93	54.00	288	1	Average
3	* 5352.940	40.84	1.69	42.53	-11.47	54.00	288	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

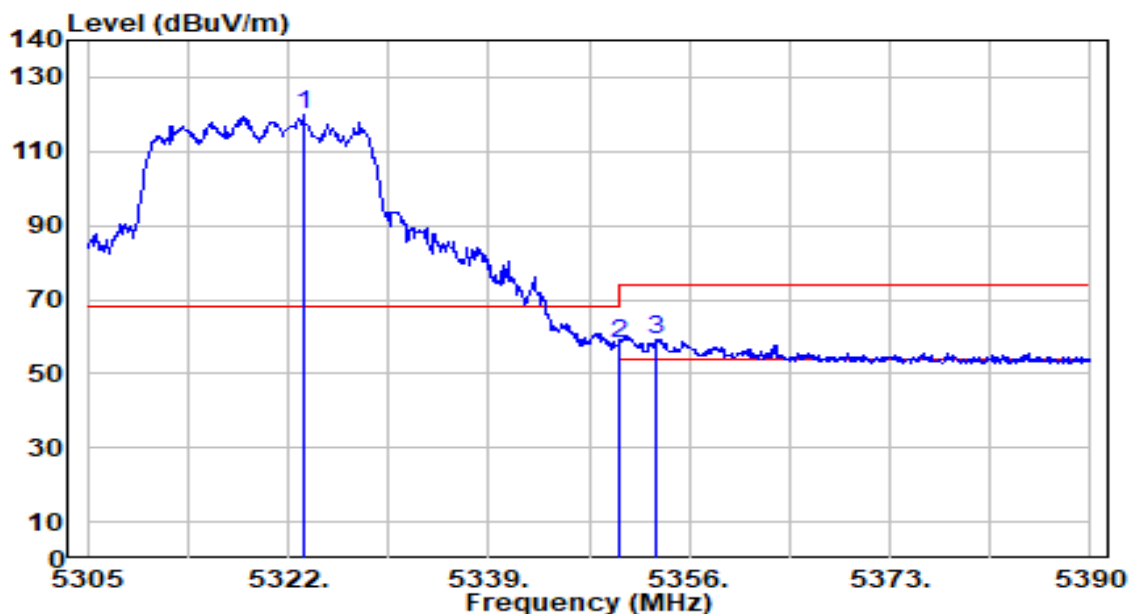


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5323.360	118.13	1.73	119.86	N/A	N/A	173	151	Peak
2	5350.000	56.36	1.69	58.05	-15.95	74.00	173	151	Peak
3	* 5353.110	57.72	1.69	59.41	-14.59	74.00	173	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1+3	Test Voltage	AC 120V/60Hz

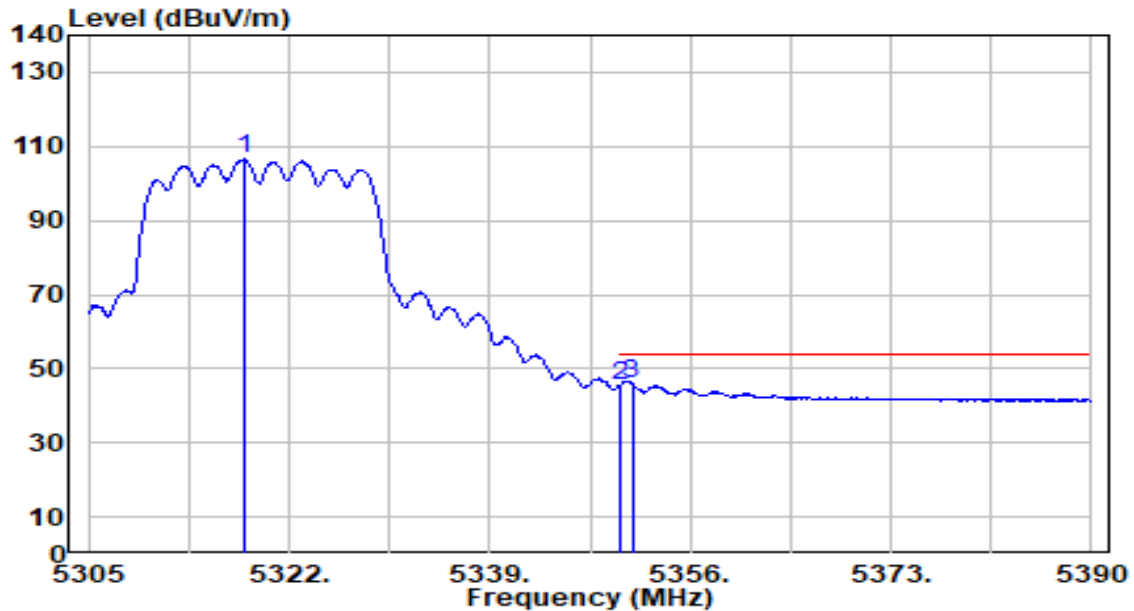


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5318.175	104.74	1.73	106.48	N/A	N/A	173	151	Average
2	5350.000	43.68	1.69	45.37	-8.63	54.00	173	151	Average
3	* 5351.070	44.24	1.69	45.93	-8.07	54.00	173	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

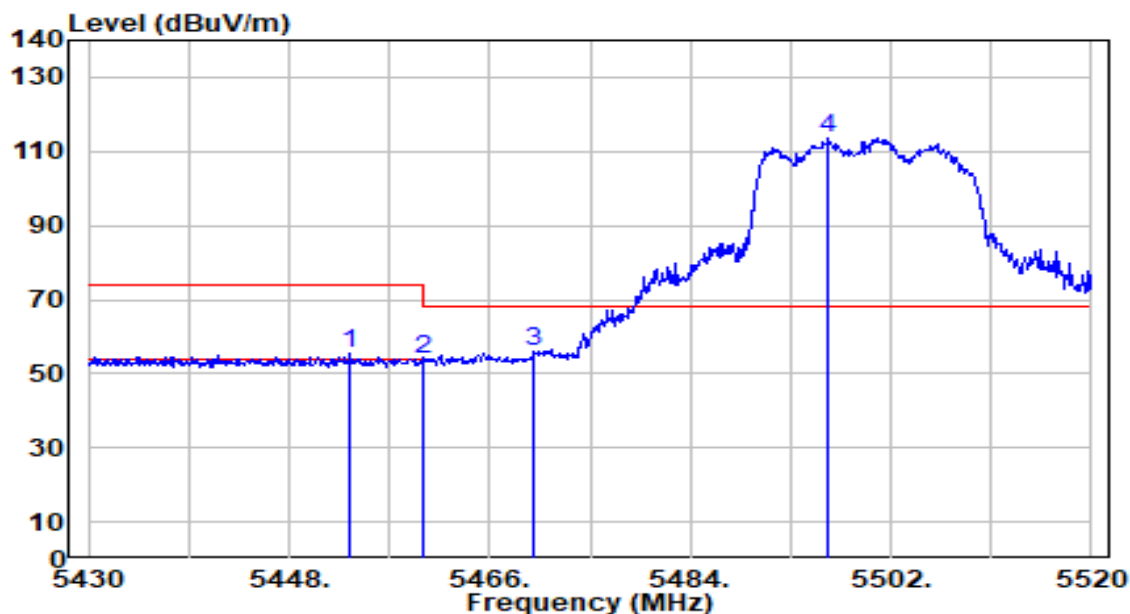


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.490	53.47	1.85	55.32	-18.68	74.00	208	206	Peak
2	5460.000	51.93	1.87	53.80	-20.20	74.00	208	206	Peak
3	* 5470.000	54.12	1.92	56.03	-12.17	68.20	208	206	Peak
4	5496.420	111.61	2.03	113.63	N/A	N/A	208	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

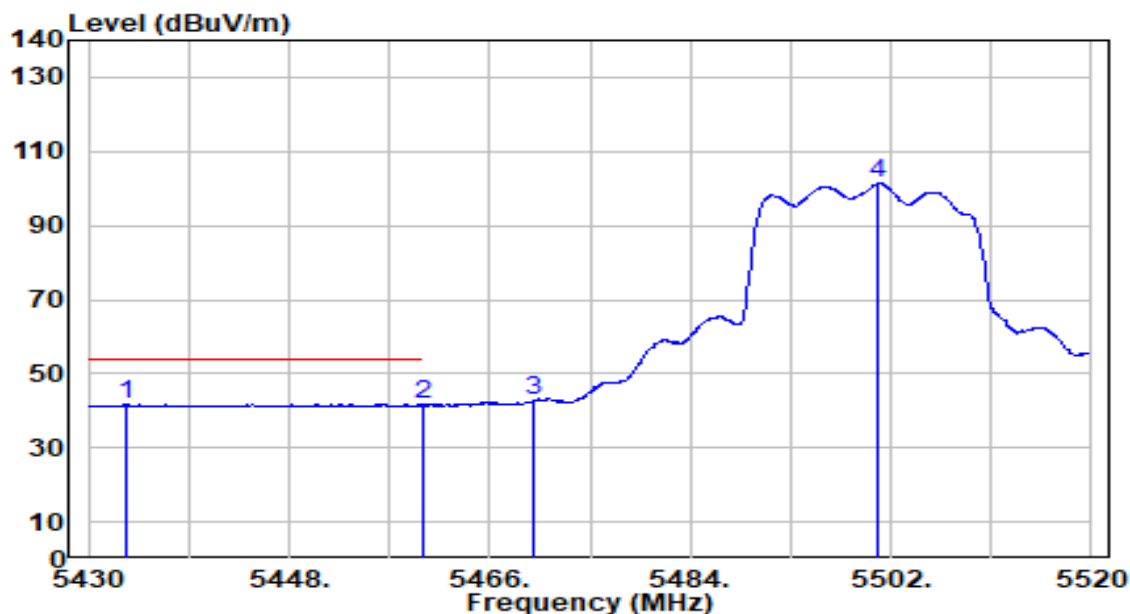


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5433.330	39.84	1.76	41.60	-12.40	54.00	208	206	Average
2		5460.000	39.71	1.87	41.58	-12.42	54.00	208	206	Average
3		5470.000	40.83	1.92	42.75	N/A	N/A	208	206	Average
4		5500.830	99.48	2.04	101.53	N/A	N/A	208	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

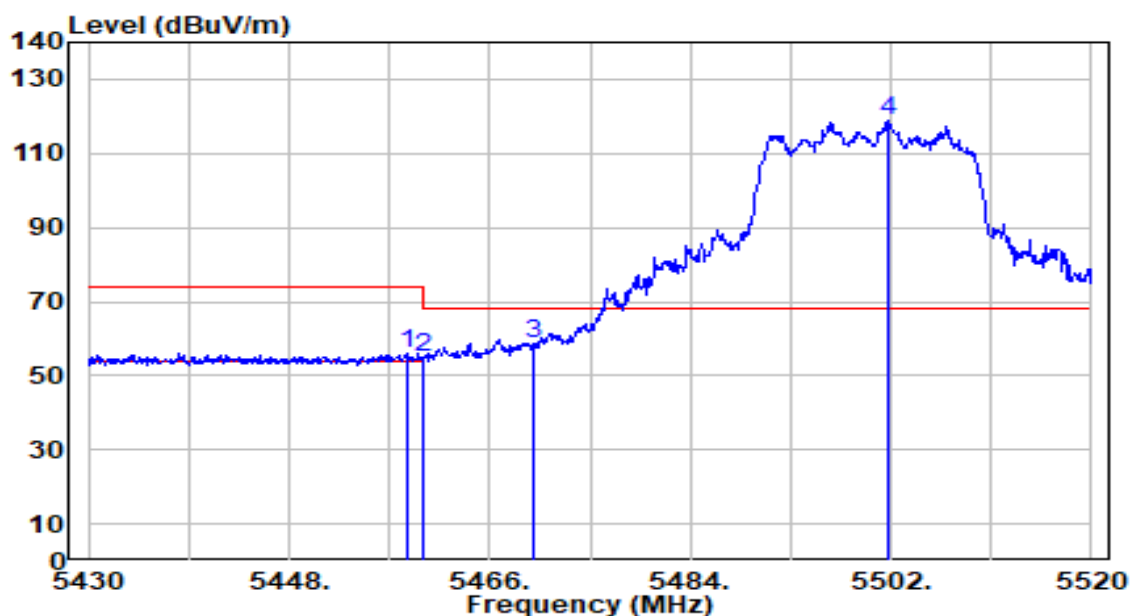


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.530	54.18	1.87	56.05	-17.95	74.00	200	154	Peak
2	5460.000	52.92	1.87	54.79	-19.21	74.00	200	154	Peak
3	* 5470.000	56.47	1.92	58.39	-9.81	68.20	200	154	Peak
4	5501.730	116.63	2.05	118.67	N/A	N/A	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1+3	Test Voltage	AC 120V/60Hz

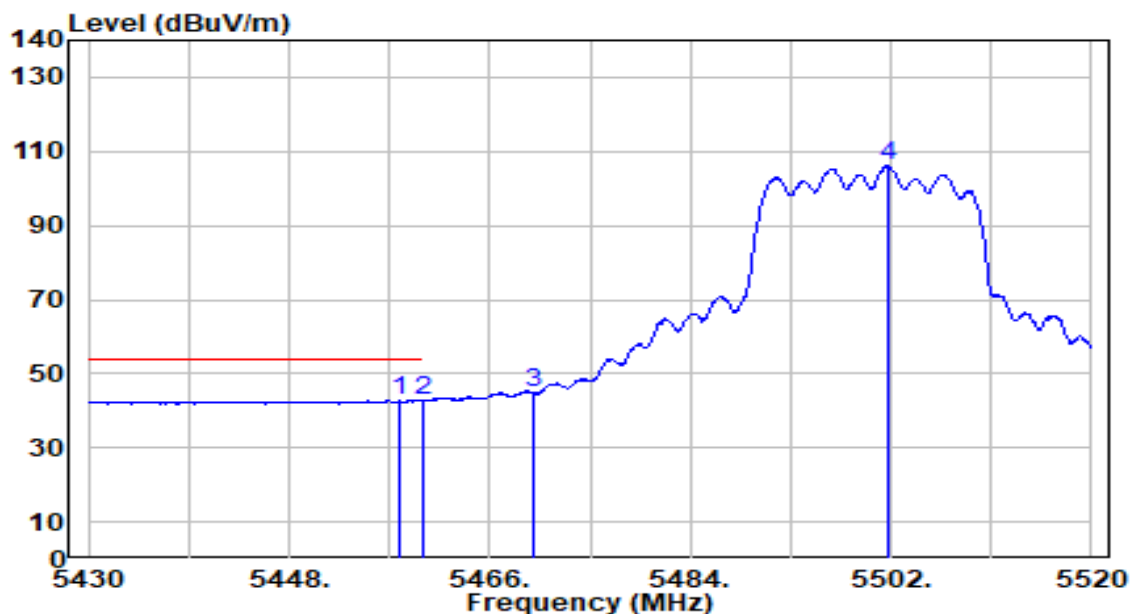


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.990	40.87	1.87	42.74	-11.26	54.00	200	154	Average
2		5460.000	40.82	1.87	42.70	-11.30	54.00	200	154	Average
3		5470.000	42.95	1.92	44.87	N/A	N/A	200	154	Average
4		5501.730	103.93	2.05	105.98	N/A	N/A	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

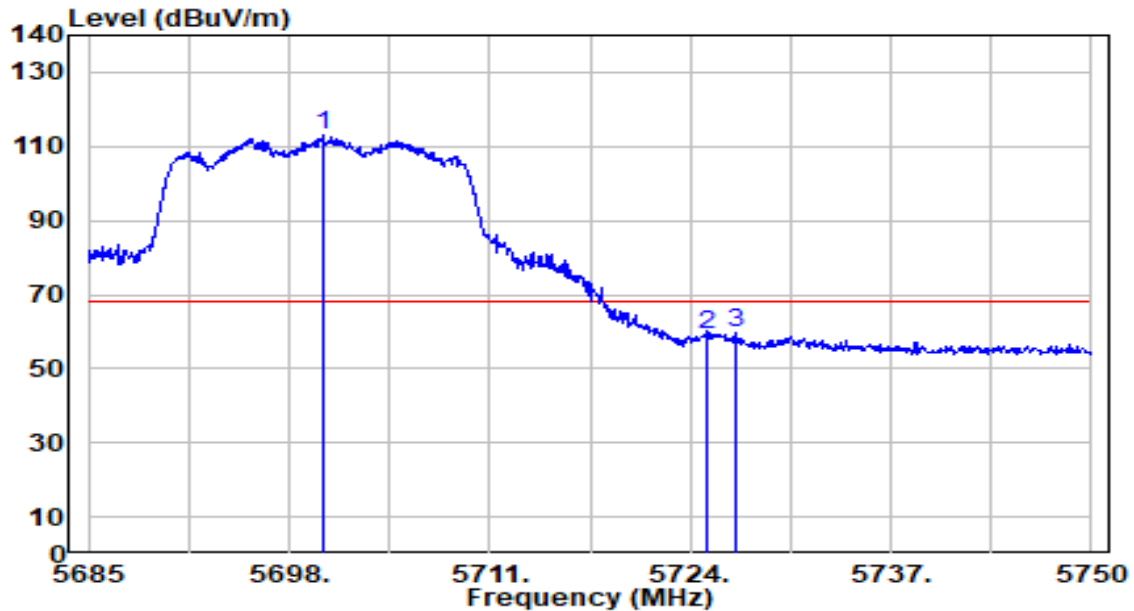


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5700.145	110.03	3.02	113.04	N/A	N/A	208	353	Peak
2	5725.000	56.28	3.14	59.42	-8.78	68.20	208	353	Peak
3	* 5726.990	56.31	3.15	59.46	-8.74	68.20	208	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1+3	Test Voltage	AC 120V/60Hz

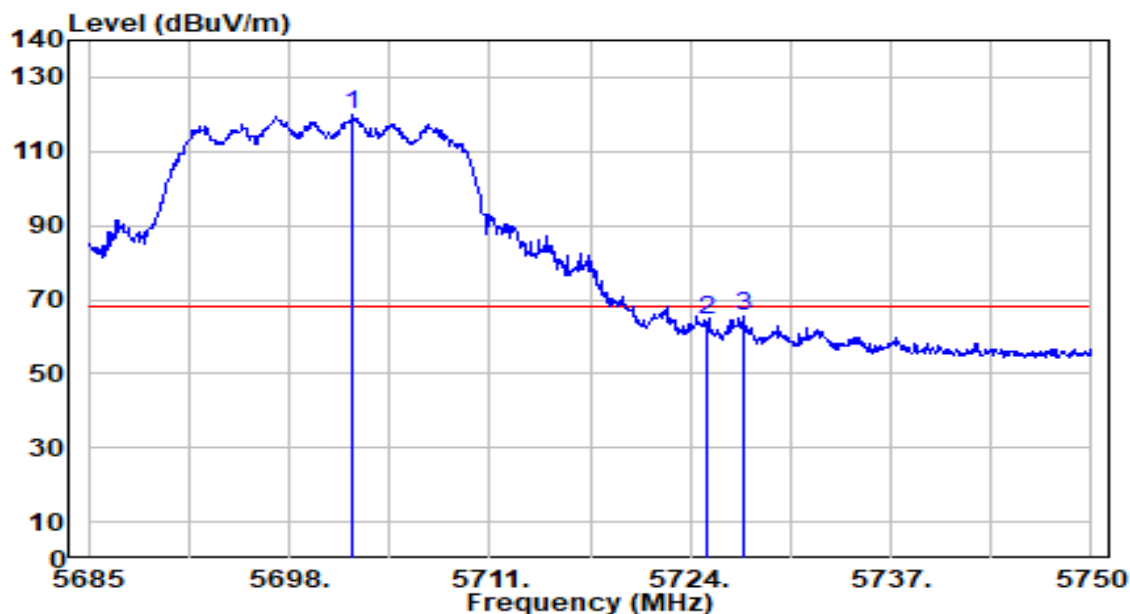


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5702.095	116.91	3.03	119.94	N/A	N/A	190	350	Peak
2	5725.000	61.40	3.14	64.54	-3.66	68.20	190	350	Peak
3	* 5727.445	62.20	3.15	65.35	-2.85	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

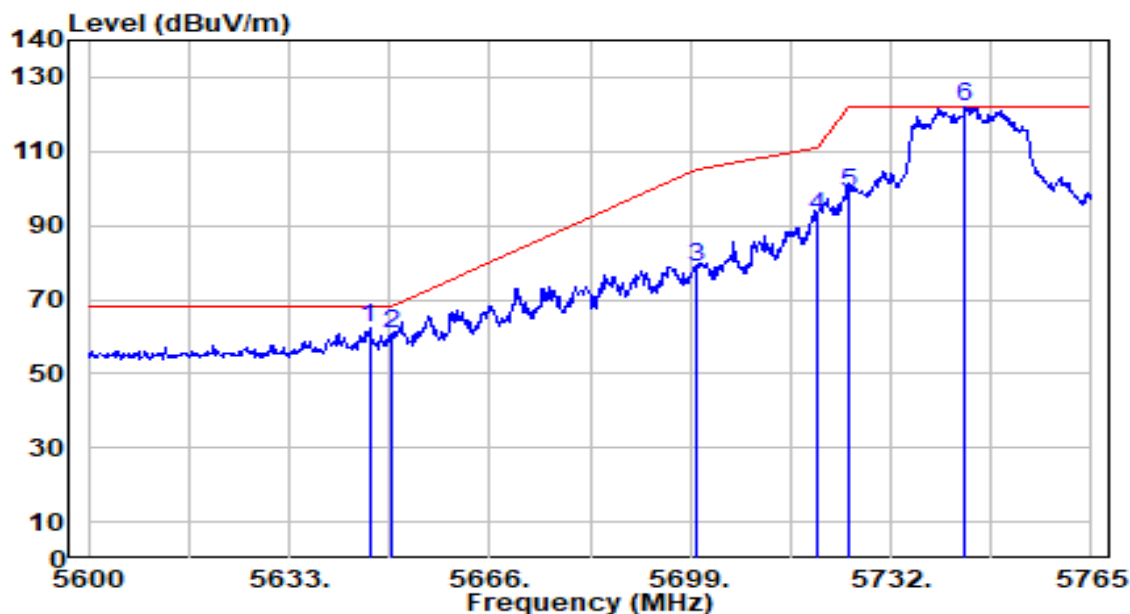


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.200	59.72	2.76	62.48	-5.72	68.20	206	355	Peak
2		5650.000	57.74	2.78	60.52	-7.68	68.20	206	355	Peak
3		5700.000	75.79	3.02	78.80	-26.40	105.20	206	355	Peak
4		5720.000	89.36	3.12	92.47	-18.33	110.80	206	355	Peak
5		5725.000	95.69	3.14	98.83	-23.37	122.20	206	355	Peak
6		5744.210	118.83	3.24	122.06	N/A	N/A	206	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1+3	Test Voltage	AC 120V/60Hz

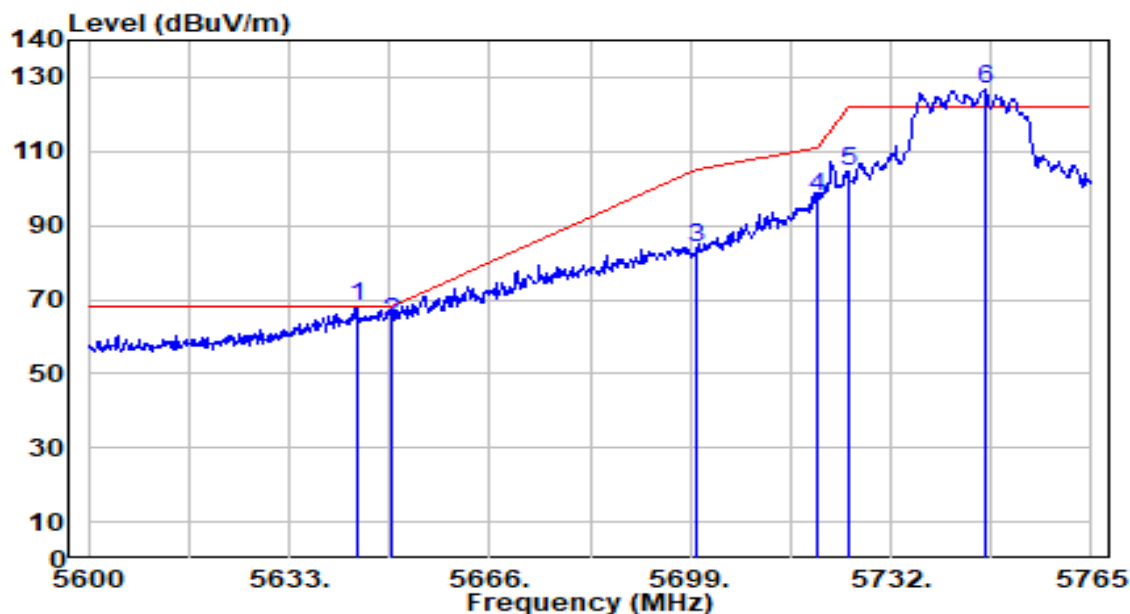


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.055	65.21	2.75	67.96	-0.24	68.20	202	347	Peak
2		5650.000	61.37	2.78	64.14	-4.06	68.20	202	347	Peak
3		5700.000	80.79	3.02	83.81	-21.39	105.20	202	347	Peak
4		5720.000	94.58	3.12	97.70	-13.10	110.80	202	347	Peak
5		5725.000	101.68	3.14	104.82	-17.38	122.20	202	347	Peak
6		5747.510	123.72	3.25	126.97	N/A	N/A	202	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

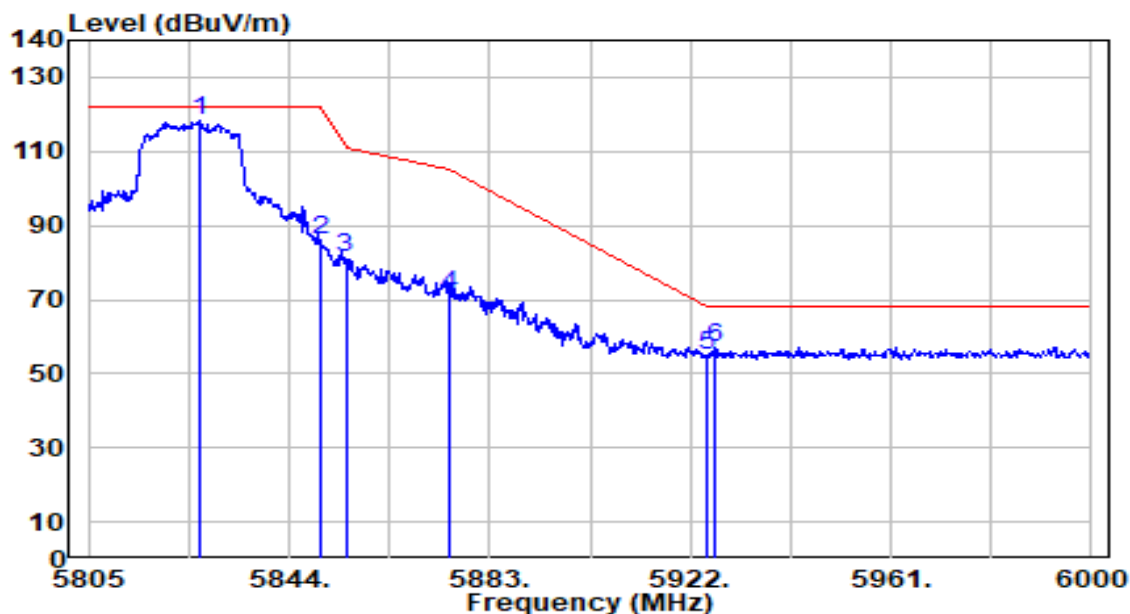


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	114.66	3.51	118.17	N/A	N/A	196	360	Peak
2	5850.000	82.57	3.51	86.07	-36.13	122.20	196	360	Peak
3	5855.000	78.11	3.51	81.62	-29.18	110.80	196	360	Peak
4	5875.000	67.81	3.50	71.32	-33.88	105.20	196	360	Peak
5	5925.000	51.52	3.51	55.03	-13.17	68.20	196	360	Peak
6	* 5926.680	53.74	3.51	57.26	-10.94	68.20	196	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1+3	Test Voltage	AC 120V/60Hz

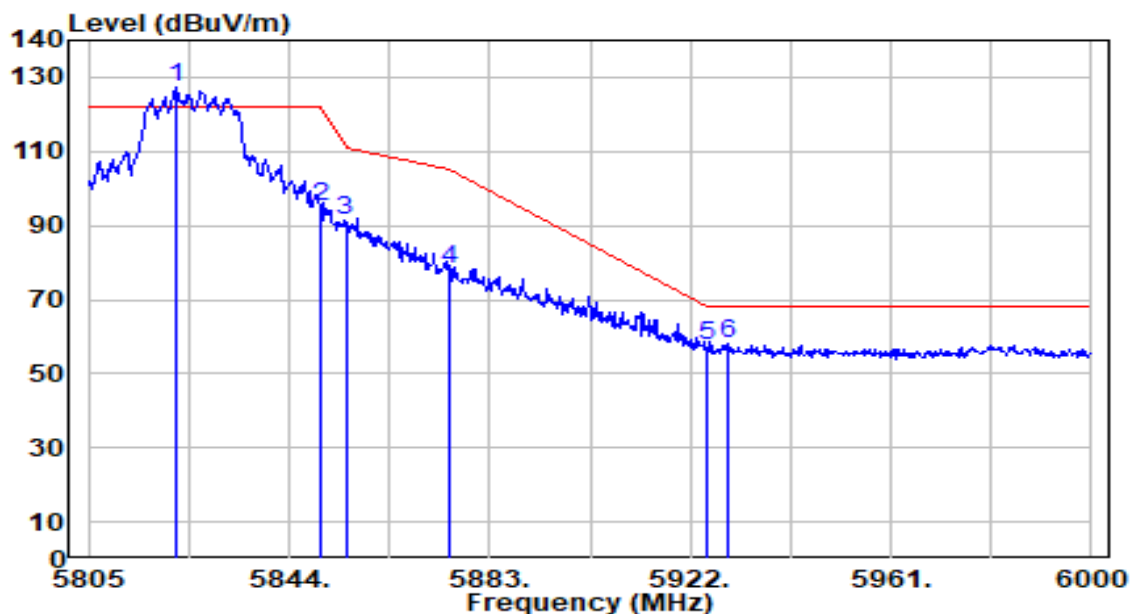


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5822.160	123.89	3.51	127.41	N/A	N/A	182	346	Peak
2	5850.000	91.37	3.51	94.88	-27.32	122.20	182	346	Peak
3	5855.000	87.67	3.51	91.18	-19.62	110.80	182	346	Peak
4	5875.000	74.57	3.50	78.07	-27.13	105.20	182	346	Peak
5	5925.000	54.21	3.51	57.72	-10.48	68.20	182	346	Peak
6	* 5929.410	54.76	3.51	58.27	-9.93	68.20	182	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

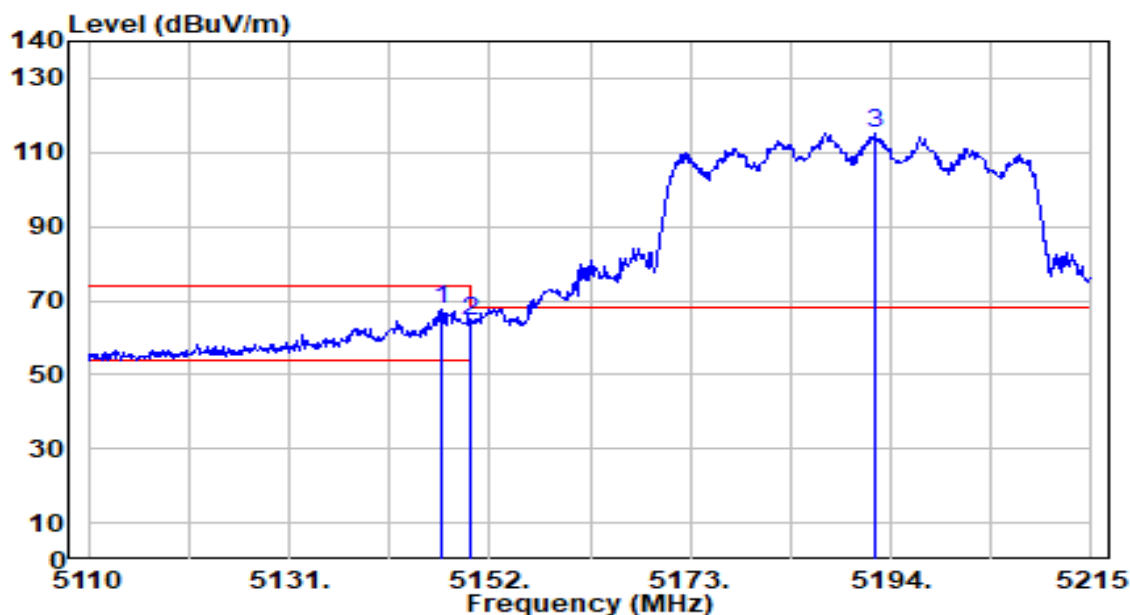


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.065	65.60	1.81	67.42	-6.58	74.00	281	6	Peak
2		5150.000	62.55	1.82	64.37	-9.63	74.00	281	6	Peak
3		5192.320	113.23	1.89	115.12	N/A	N/A	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

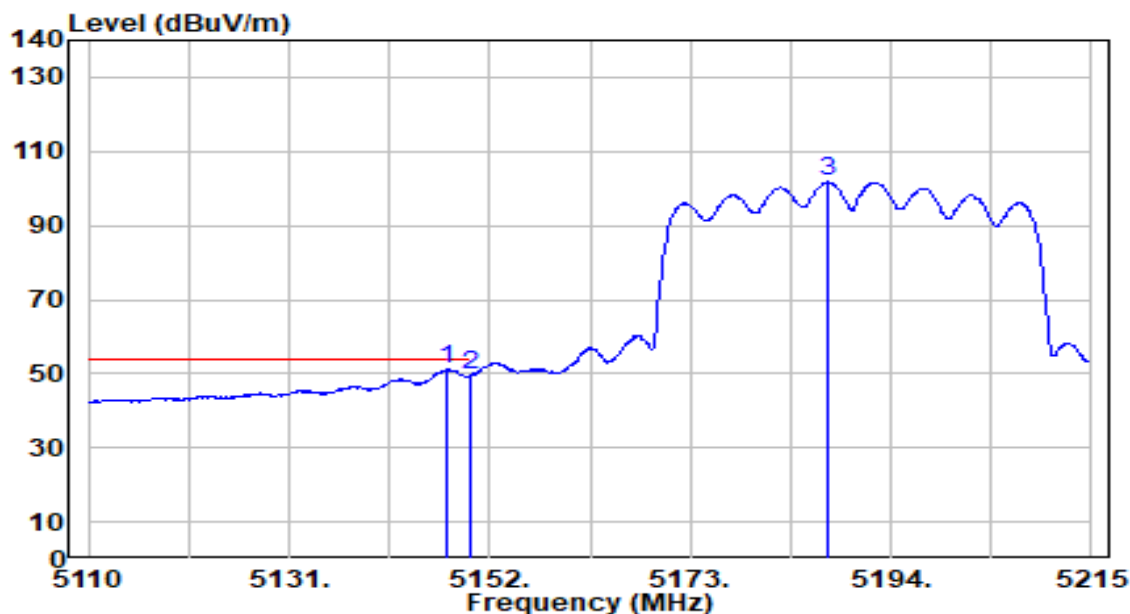


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.485	49.35	1.81	51.17	-2.83	54.00	281	6	Average
2		5150.000	47.76	1.82	49.58	-4.42	54.00	281	6	Average
3		5187.385	99.85	1.88	101.73	N/A	N/A	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

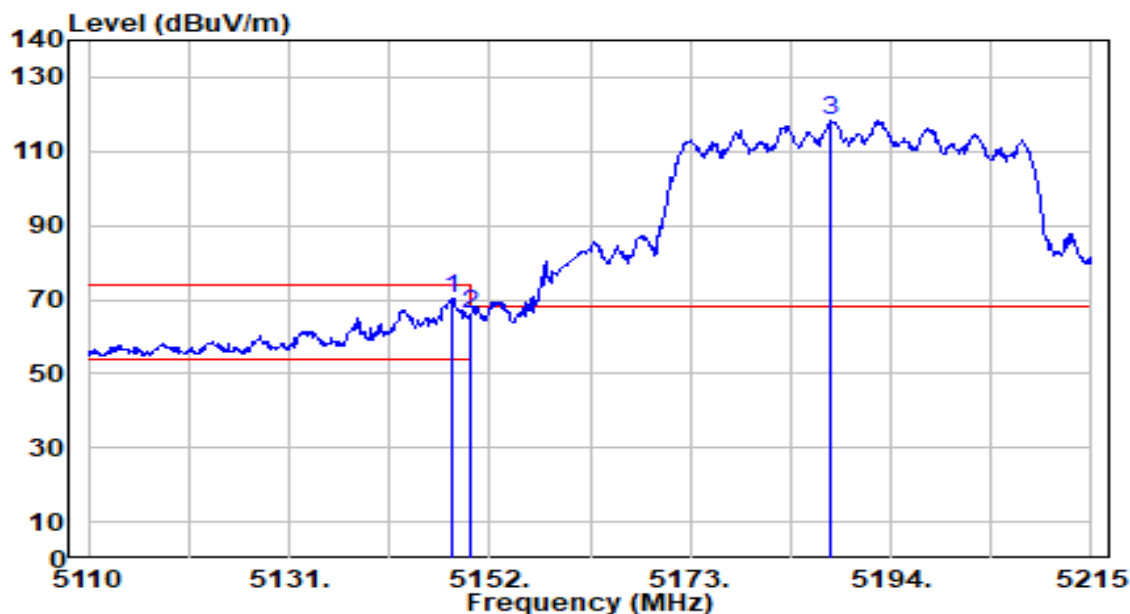


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.115	68.49	1.82	70.31	-3.69	74.00	136	248	Peak
2		5150.000	64.38	1.82	66.20	-7.80	74.00	136	248	Peak
3		5187.595	116.30	1.88	118.18	N/A	N/A	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1+3	Test Voltage	AC 120V/60Hz

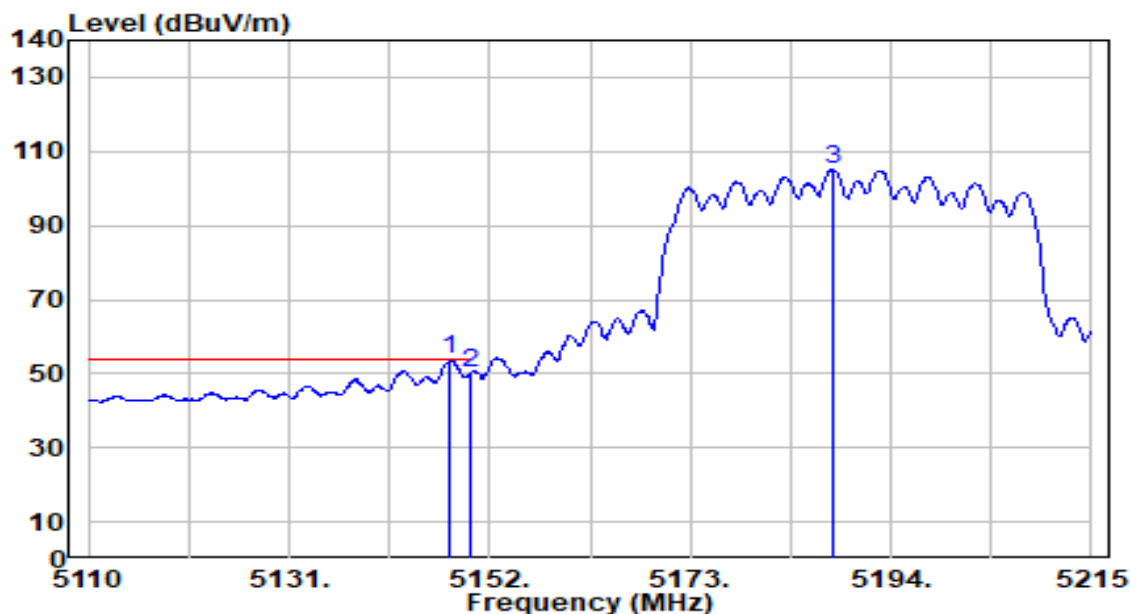


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	51.90	1.82	53.71	-0.29	54.00	136	248	Average
2		5150.000	48.49	1.82	50.30	-3.70	54.00	136	248	Average
3		5187.910	103.24	1.88	105.13	N/A	N/A	136	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

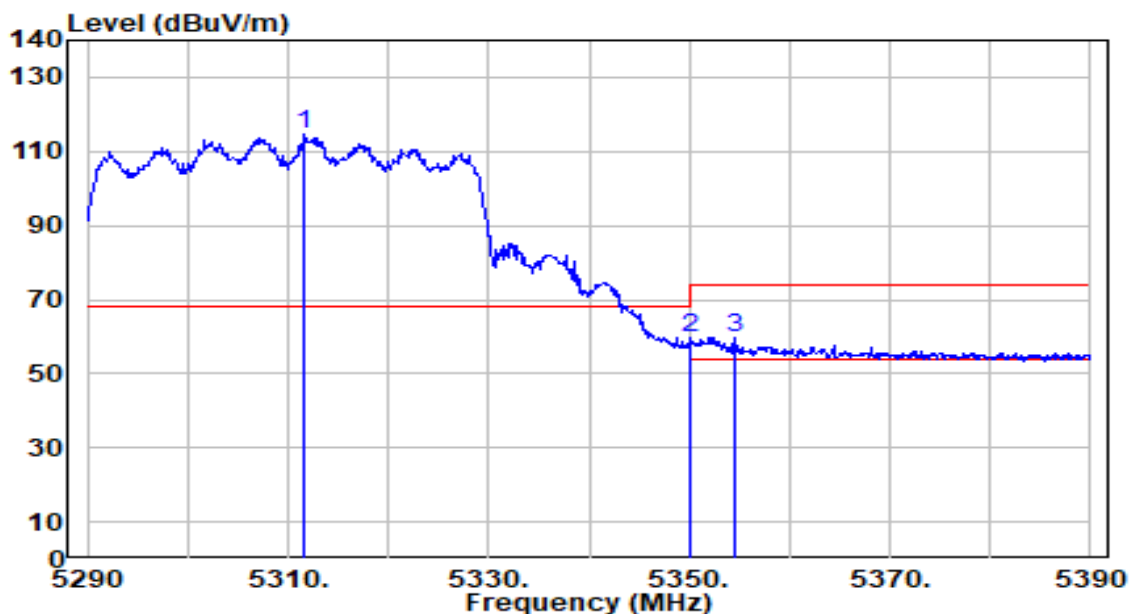


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5311.600	113.00	1.74	114.74	N/A	N/A	288	1	Peak
2	* 5350.000	58.26	1.69	59.95	-14.05	74.00	288	1	Peak
3	5354.500	58.16	1.68	59.84	-14.16	74.00	288	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

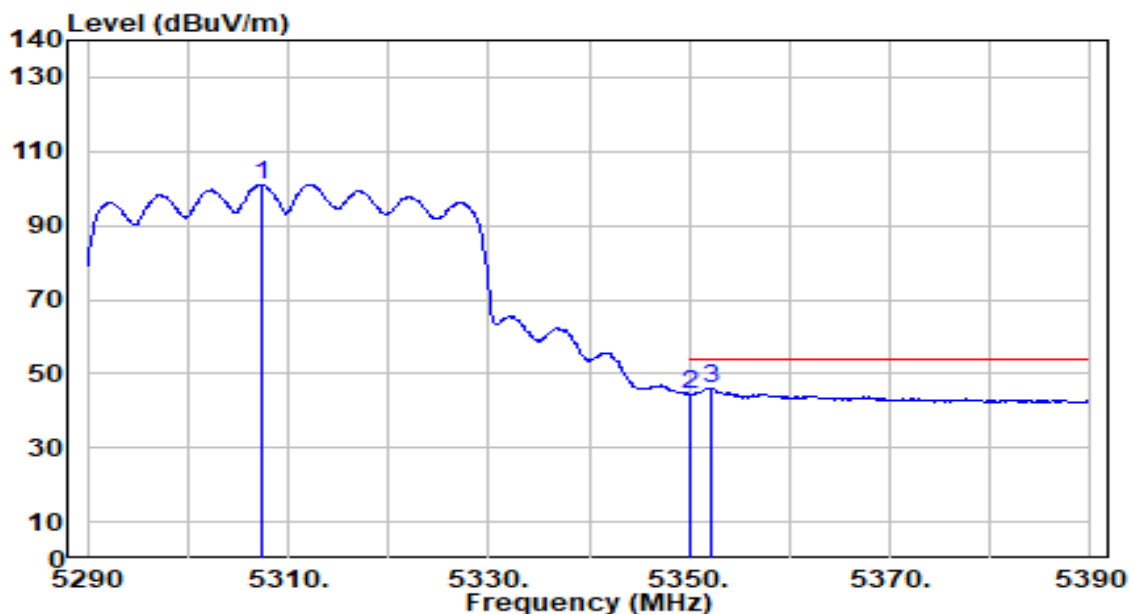


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5307.400	99.29	1.75	101.04	N/A	N/A	288	1	Average
2	5350.000	42.83	1.69	44.52	-9.48	54.00	288	1	Average
3	* 5352.300	44.33	1.69	46.02	-7.98	54.00	288	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

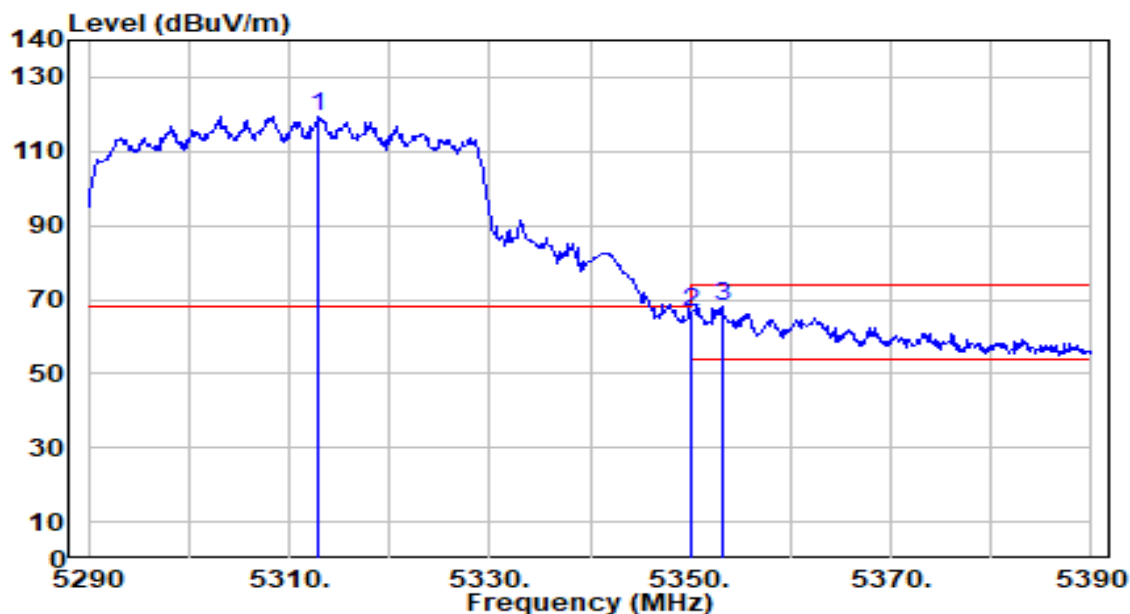


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.000	117.83	1.74	119.57	N/A	N/A	173	151	Peak
2	5350.000	64.94	1.69	66.63	-7.37	74.00	173	151	Peak
3	* 5353.200	66.50	1.69	68.18	-5.82	74.00	173	151	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1+3	Test Voltage	AC 120V/60Hz

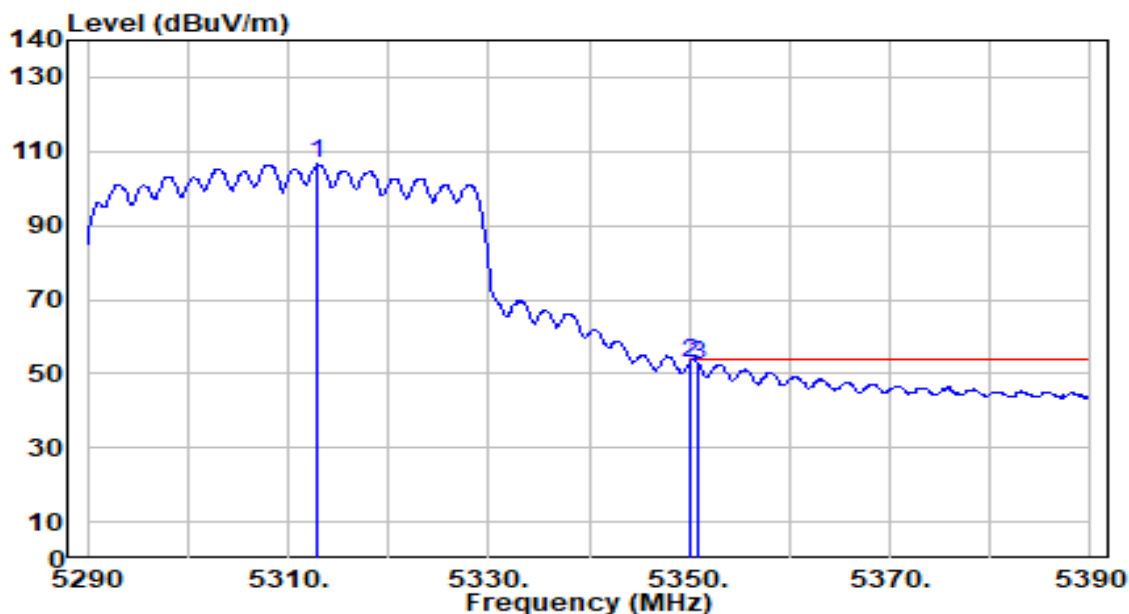


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5312.900	104.74	1.74	106.48	N/A	N/A	173	151	Average
2	*	5350.000	51.05	1.69	52.74	-1.26	54.00	173	151	Average
3		5351.000	50.62	1.69	52.31	-1.69	54.00	173	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

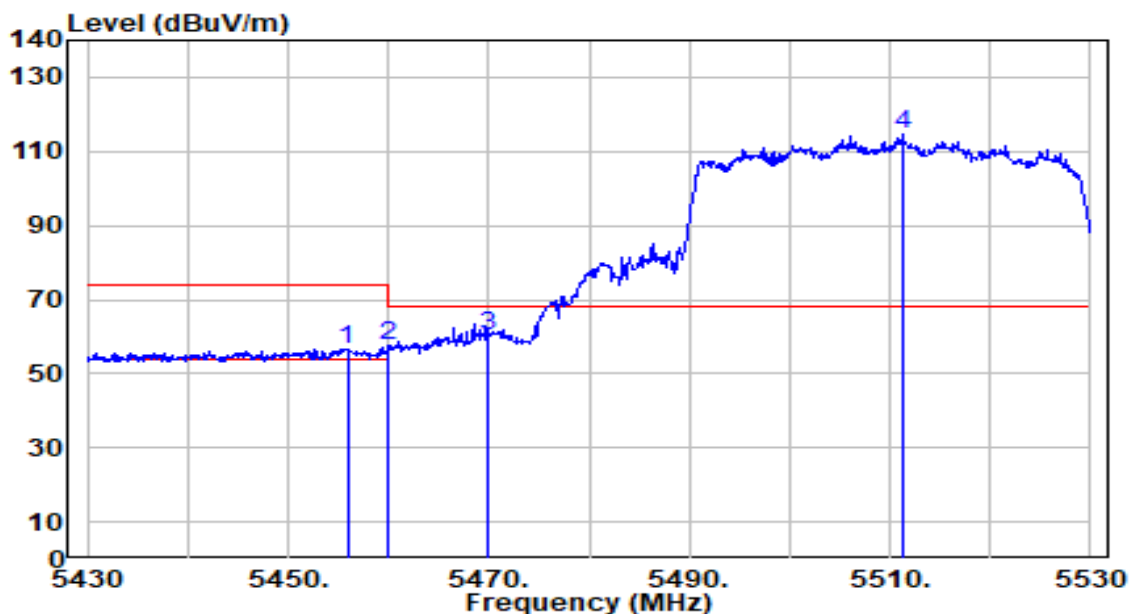


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.900	54.89	1.86	56.75	-17.25	74.00	208	206	Peak
2	5460.000	55.47	1.87	57.35	-16.65	74.00	208	206	Peak
3	* 5470.000	58.28	1.92	60.20	-8.00	68.20	208	206	Peak
4	5511.200	112.77	2.10	114.86	N/A	N/A	208	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

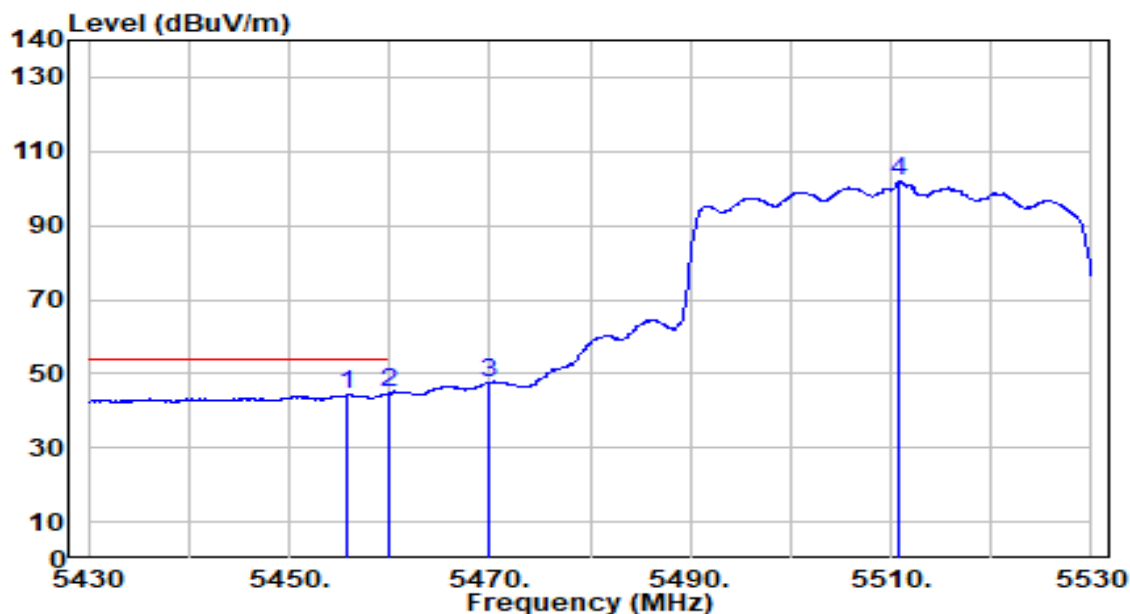


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5455.700	42.42	1.86	44.28	-9.72	54.00	208	206	Average
2	*	5460.000	43.08	1.87	44.95	-9.05	54.00	208	206	Average
3		5470.000	45.63	1.92	47.54	N/A	N/A	208	206	Average
4		5510.700	99.70	2.09	101.79	N/A	N/A	208	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

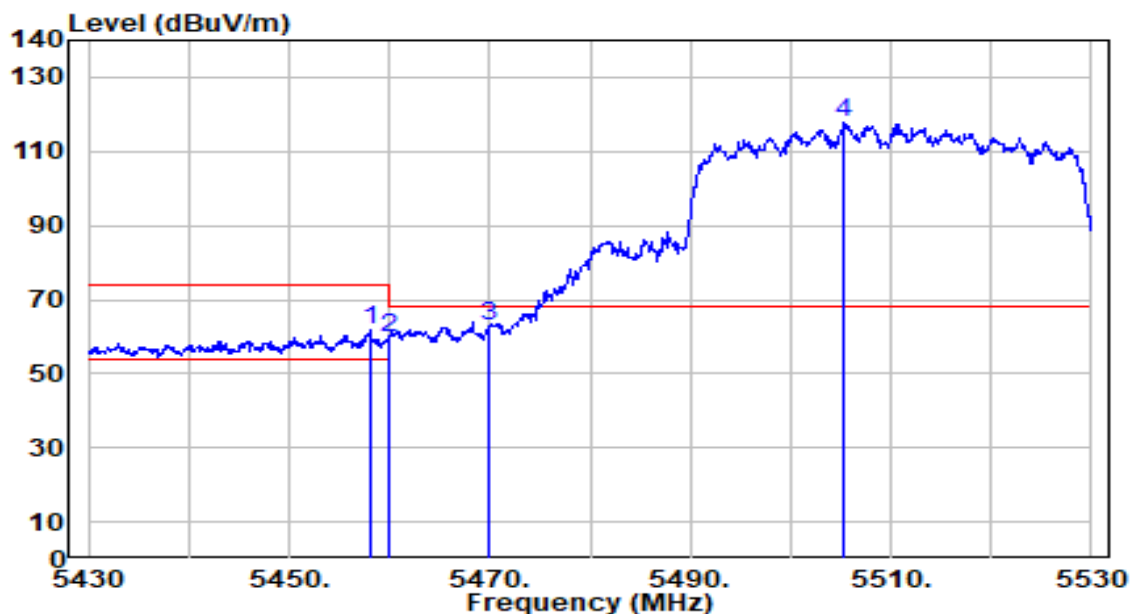


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.100	59.78	1.87	61.65	-12.35	74.00	200	154	Peak
2	5460.000	57.76	1.87	59.64	-14.36	74.00	200	154	Peak
3	* 5470.000	60.98	1.92	62.90	-5.30	68.20	200	154	Peak
4	5505.400	115.59	2.07	117.65	N/A	N/A	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1+3	Test Voltage	AC 120V/60Hz

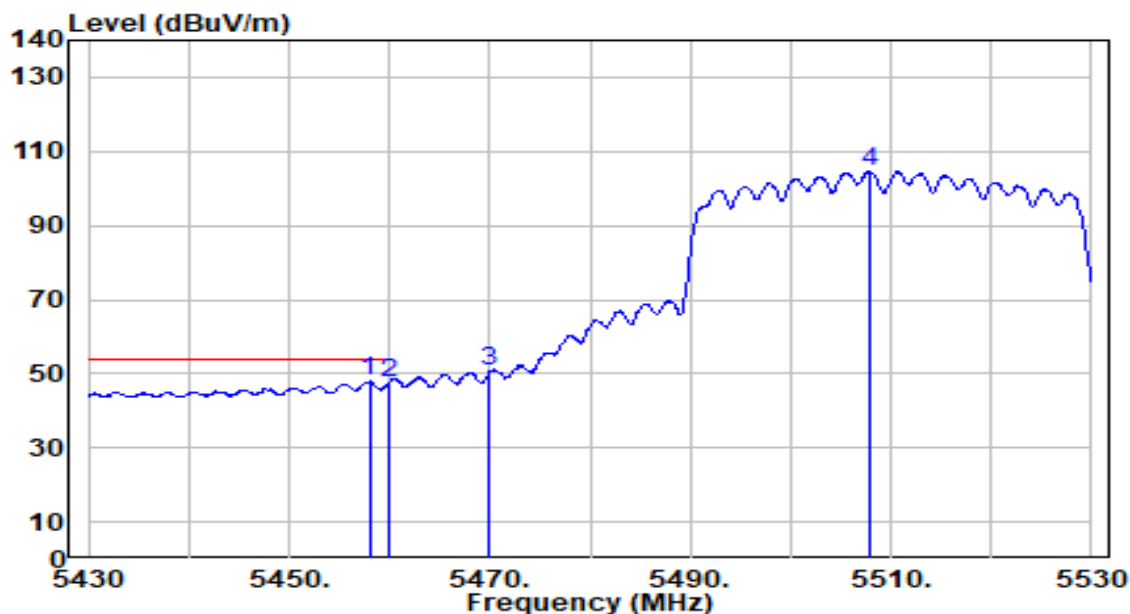


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.000	45.97	1.87	47.84	-6.16	54.00	200	154	Average
2		5460.000	45.67	1.87	47.55	-6.45	54.00	200	154	Average
3		5470.000	48.79	1.92	50.70	N/A	N/A	200	154	Average
4		5507.900	102.44	2.08	104.52	N/A	N/A	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+3	Test Voltage	AC 120V/60Hz

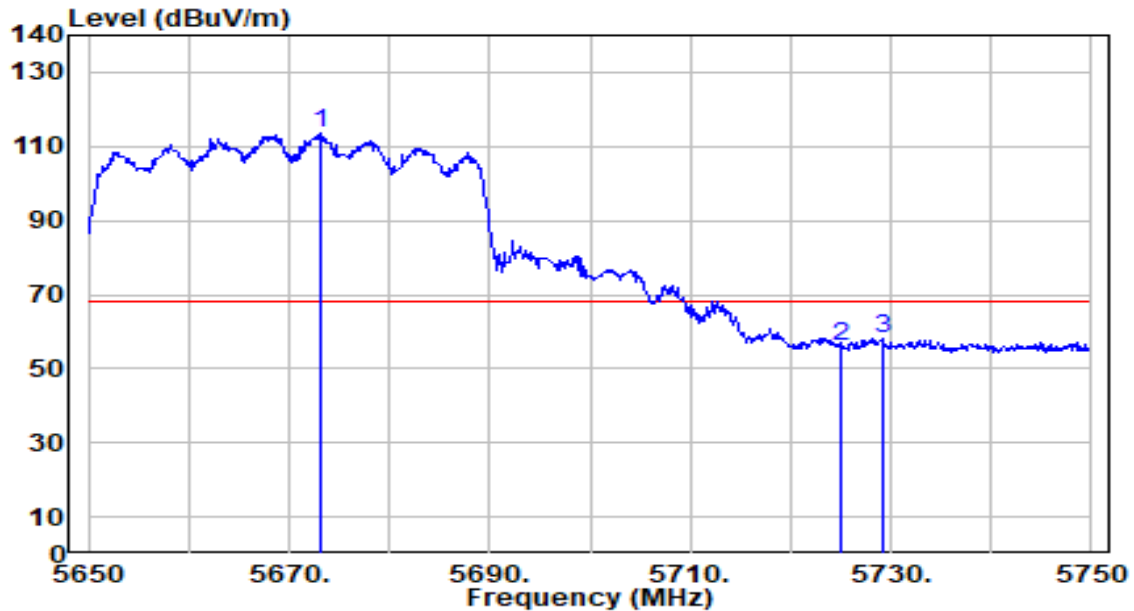


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5673.100	110.55	2.89	113.43	N/A	N/A	208	353	Peak
2	5725.000	53.00	3.14	56.14	-12.06	68.20	208	353	Peak
3	* 5729.100	54.92	3.16	58.08	-10.12	68.20	208	353	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1+3	Test Voltage	AC 120V/60Hz

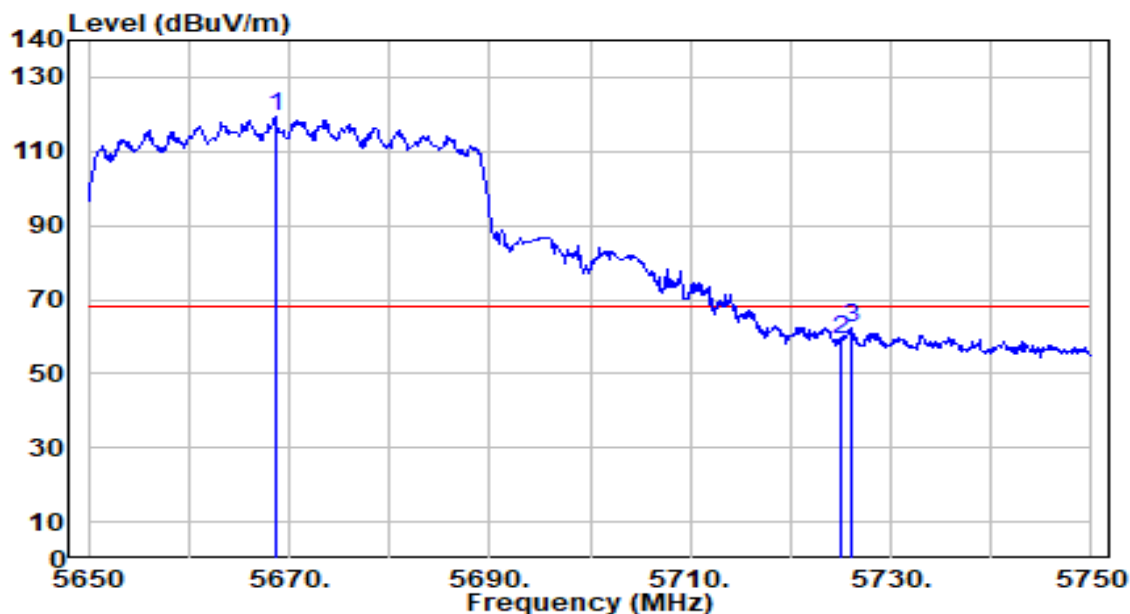


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.600	116.32	2.87	119.19	N/A	N/A	190	350	Peak
2	5725.000	56.26	3.14	59.40	-8.80	68.20	190	350	Peak
3	* 5726.000	59.13	3.15	62.28	-5.92	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+3	Test Voltage	AC 120V/60Hz

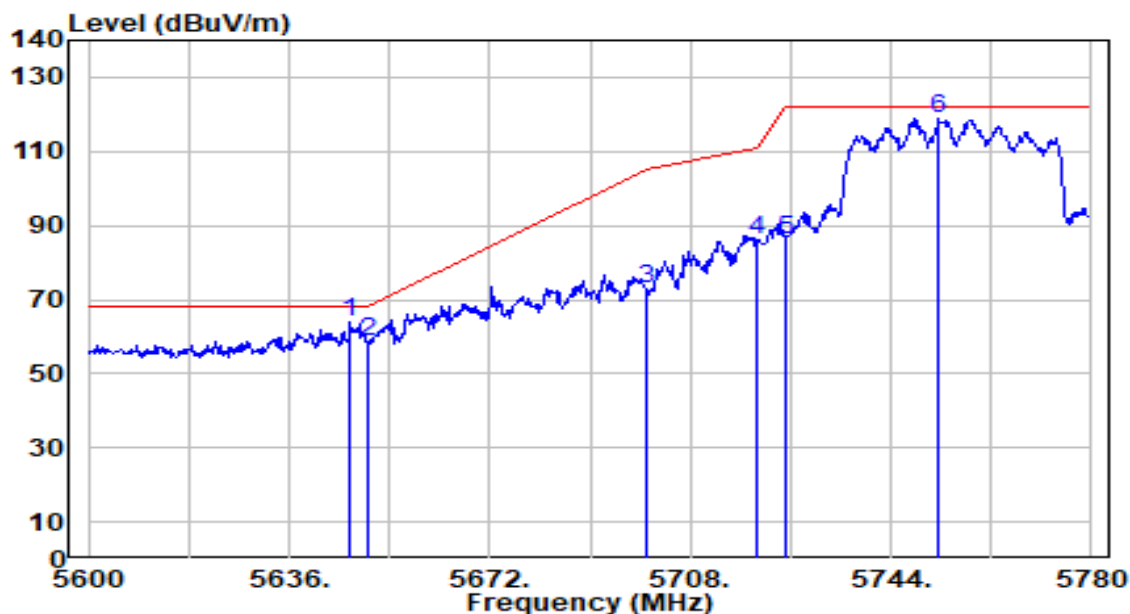


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	61.15	2.76	63.91	-4.29	68.20	206	355	Peak
2		5650.000	55.62	2.78	58.40	-9.80	68.20	206	355	Peak
3		5700.000	69.79	3.02	72.81	-32.39	105.20	206	355	Peak
4		5720.000	82.80	3.12	85.91	-24.89	110.80	206	355	Peak
5		5725.000	82.94	3.14	86.08	-36.12	122.20	206	355	Peak
6		5752.460	115.82	3.28	119.09	N/A	N/A	206	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1+3	Test Voltage	AC 120V/60Hz

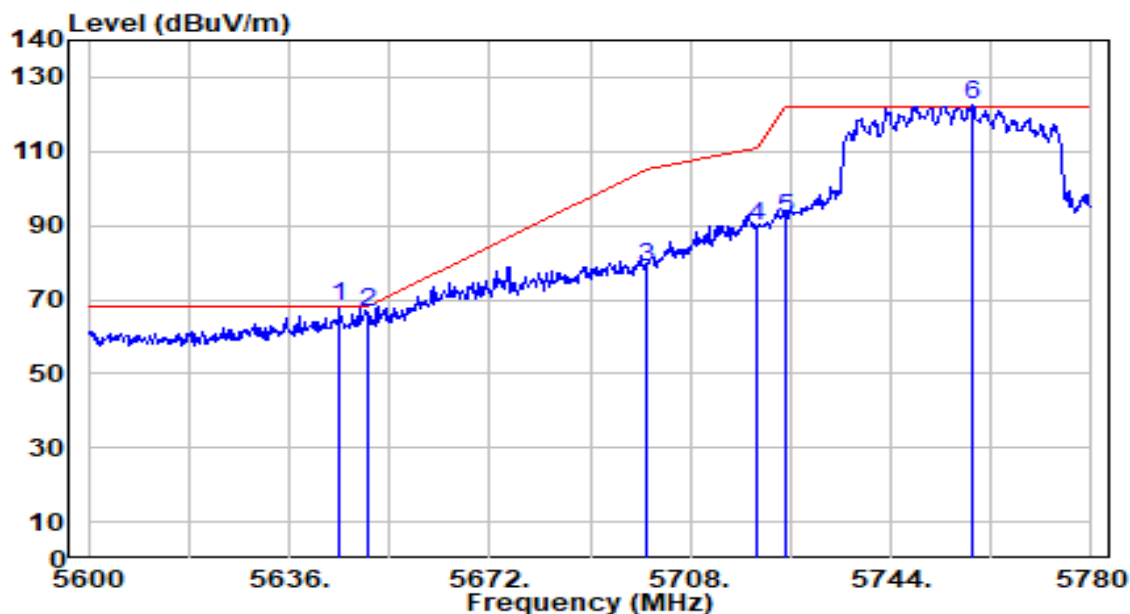


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.000	65.33	2.75	68.08	-0.12	68.20	202	347	Peak
2		5650.000	63.66	2.78	66.44	-1.76	68.20	202	347	Peak
3		5700.000	75.65	3.02	78.66	-26.54	105.20	202	347	Peak
4		5720.000	86.73	3.12	89.84	-20.96	110.80	202	347	Peak
5		5725.000	88.91	3.14	92.05	-30.15	122.20	202	347	Peak
6		5758.400	119.27	3.31	122.57	N/A	N/A	202	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+3	Test Voltage	AC 120V/60Hz

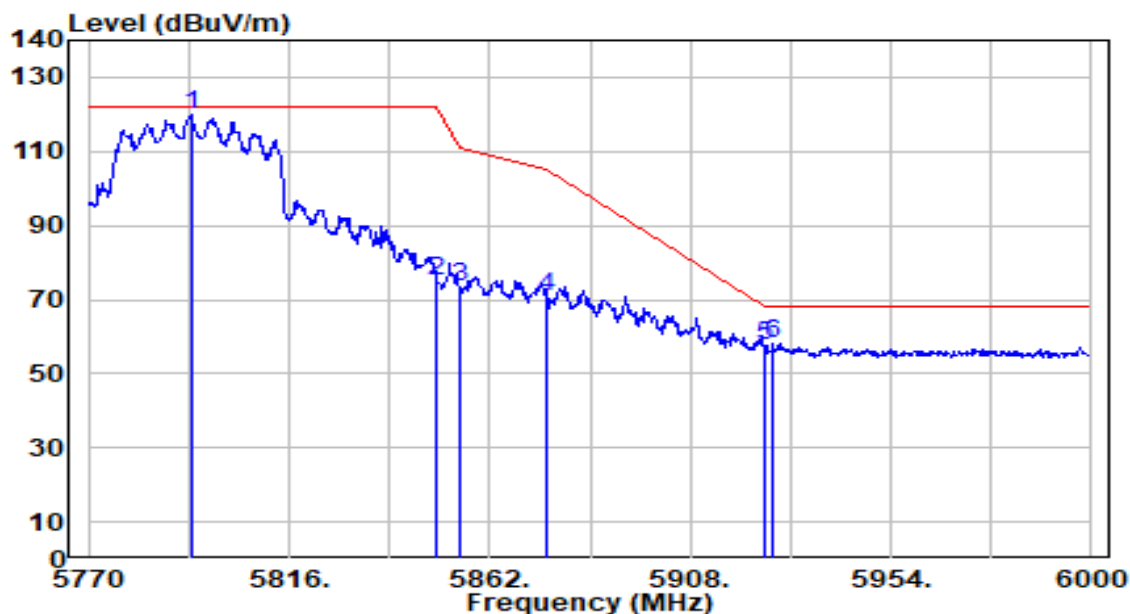


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.460	116.54	3.48	120.02	N/A	N/A	196	360	Peak
2	5850.000	71.52	3.51	75.03	-47.17	122.20	196	360	Peak
3	5855.000	69.97	3.51	73.48	-37.32	110.80	196	360	Peak
4	5875.000	67.12	3.50	70.63	-34.57	105.20	196	360	Peak
5	5925.000	53.92	3.51	57.43	-10.77	68.20	196	360	Peak
6	* 5926.860	54.54	3.51	58.06	-10.14	68.20	196	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1+3	Test Voltage	AC 120V/60Hz

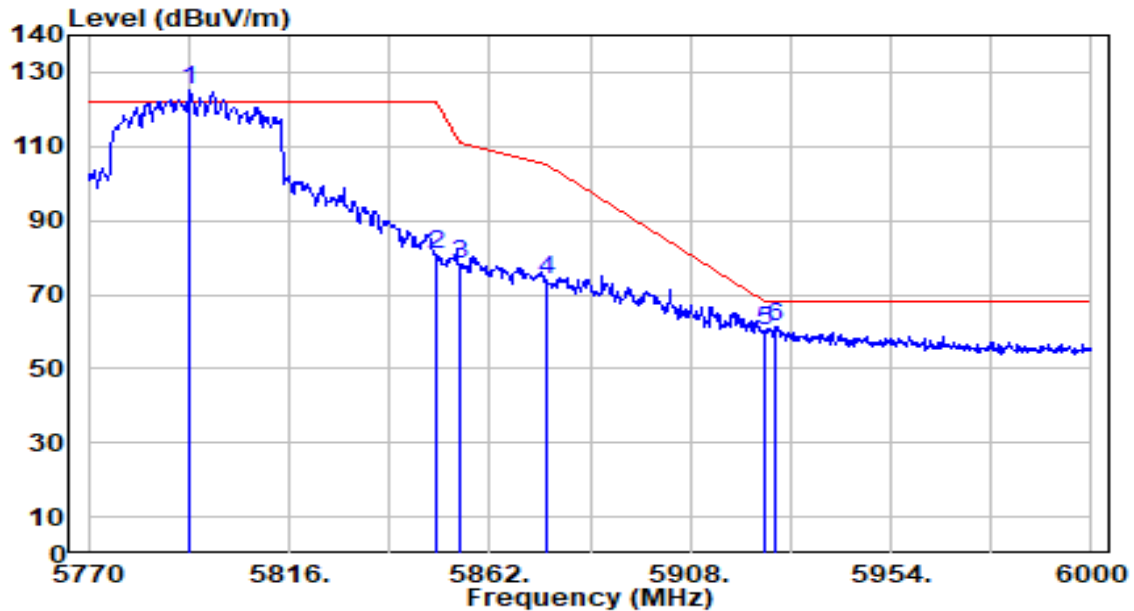


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.230	121.58	3.48	125.06	N/A	N/A	182	346	Peak
2	5850.000	77.37	3.51	80.88	-41.32	122.20	182	346	Peak
3	5855.000	74.90	3.51	78.40	-32.40	110.80	182	346	Peak
4	5875.000	70.43	3.50	73.94	-31.26	105.20	182	346	Peak
5	5925.000	56.94	3.51	60.45	-7.75	68.20	182	346	Peak
6	* 5927.320	57.63	3.51	61.14	-7.06	68.20	182	346	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

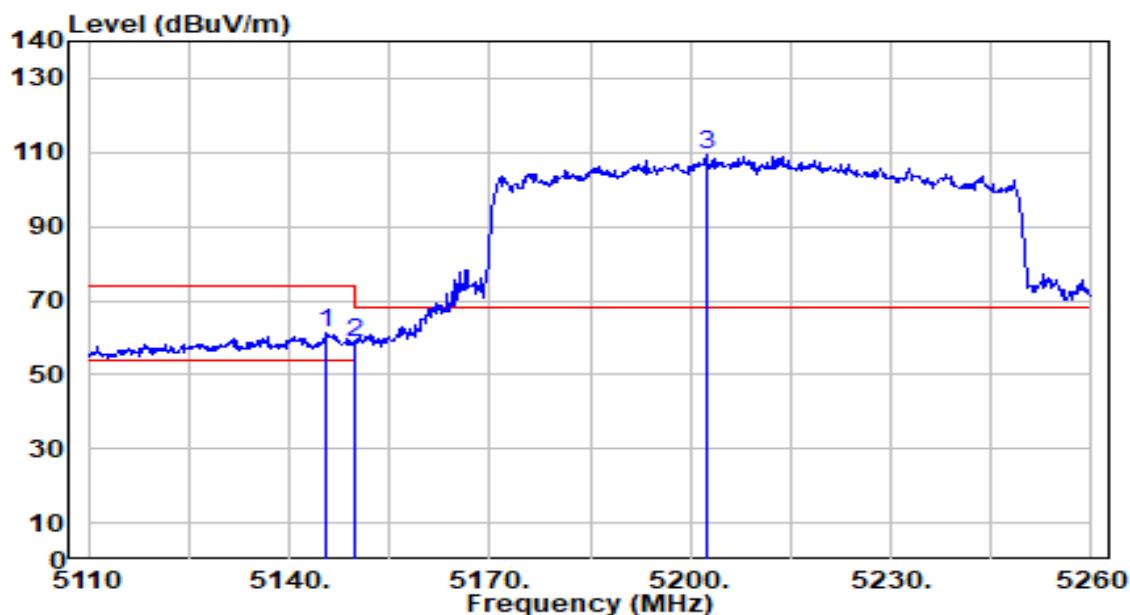


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.400	59.46	1.81	61.27	-12.73	74.00	281	6	Peak
2		5150.000	56.85	1.82	58.67	-15.33	74.00	281	6	Peak
3		5202.400	107.53	1.90	109.43	N/A	N/A	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

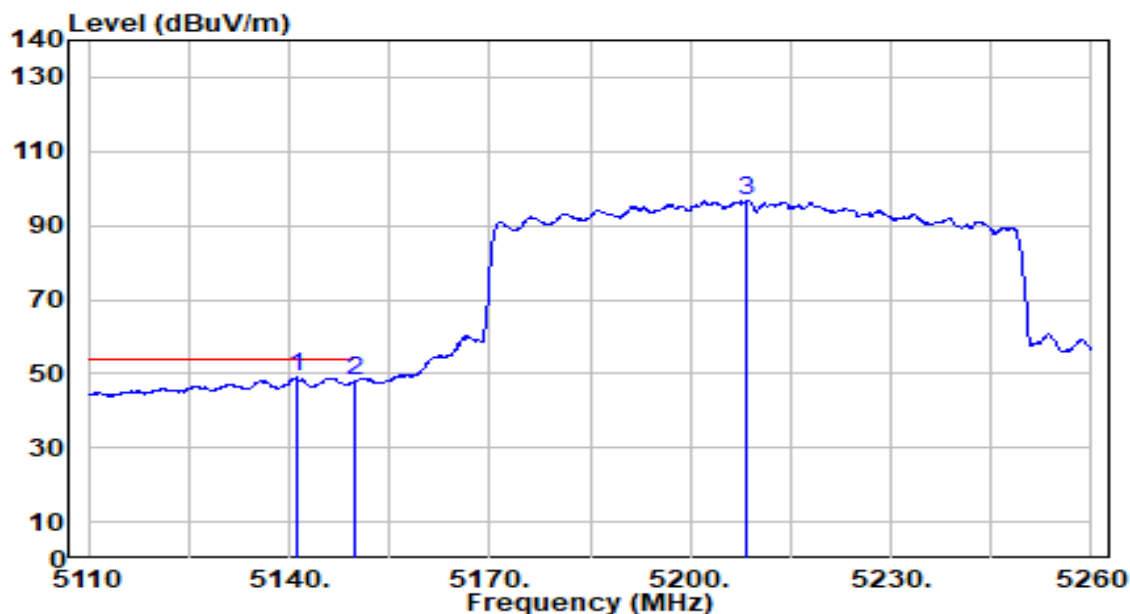


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.200	47.16	1.80	48.96	-5.04	54.00	281	6	Average
2		5150.000	46.01	1.82	47.83	-6.17	54.00	281	6	Average
3		5208.550	94.89	1.89	96.78	N/A	N/A	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

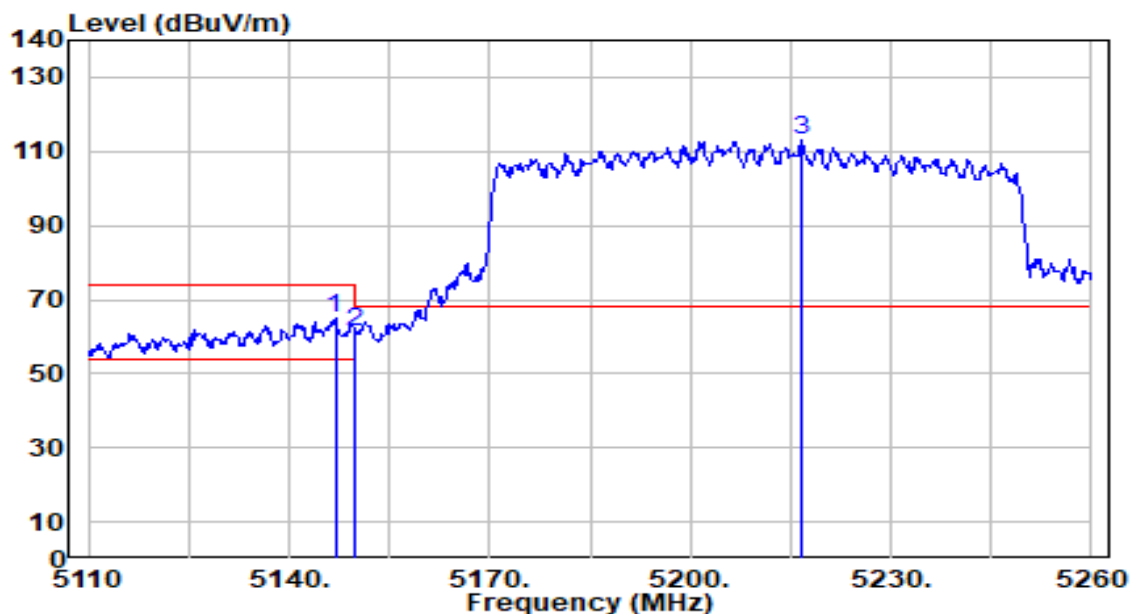


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	63.33	1.81	65.14	-8.86	74.00	136	248	Peak
2		5150.000	59.42	1.82	61.24	-12.76	74.00	136	248	Peak
3		5216.800	111.15	1.88	113.03	N/A	N/A	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1+3	Test Voltage	AC 120V/60Hz

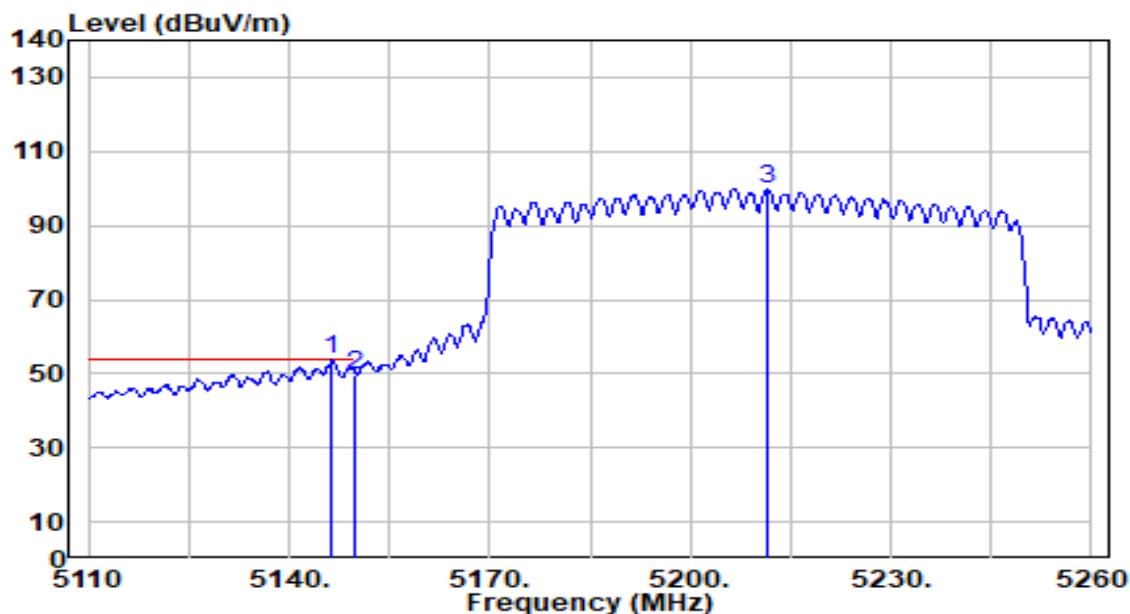


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.450	51.94	1.81	53.76	-0.24	54.00	136	248	Average
2		5150.000	47.88	1.82	49.69	-4.31	54.00	136	248	Average
3		5211.550	98.08	1.89	99.96	N/A	N/A	136	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

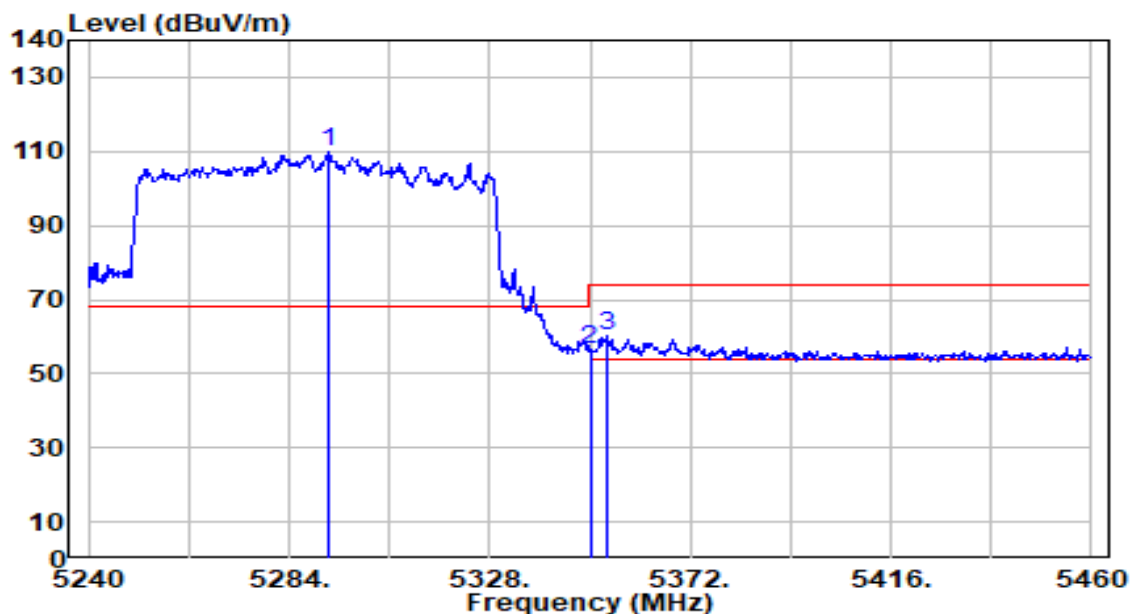


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5292.580	108.31	1.77	110.08	N/A	N/A	288	1	Peak
2	5350.000	54.84	1.69	56.53	-17.47	74.00	288	1	Peak
3	* 5353.520	58.41	1.69	60.10	-13.90	74.00	288	1	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

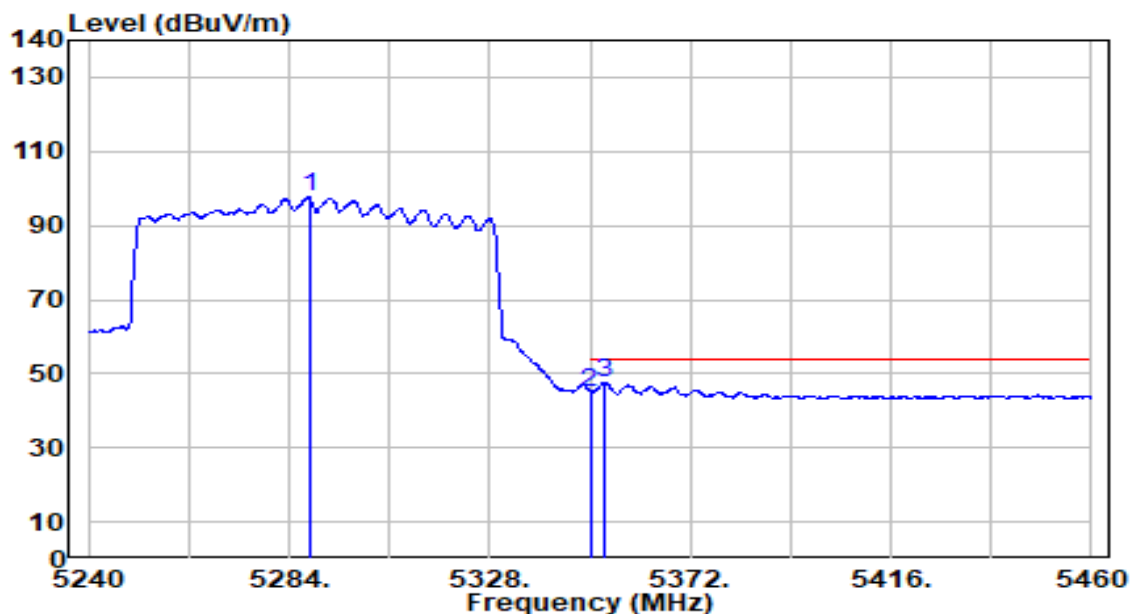


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5288.400	95.86	1.77	97.64	N/A	N/A	288	1	Average
2	5350.000	43.48	1.69	45.17	-8.83	54.00	288	1	Average
3	* 5353.300	46.07	1.69	47.76	-6.24	54.00	288	1	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

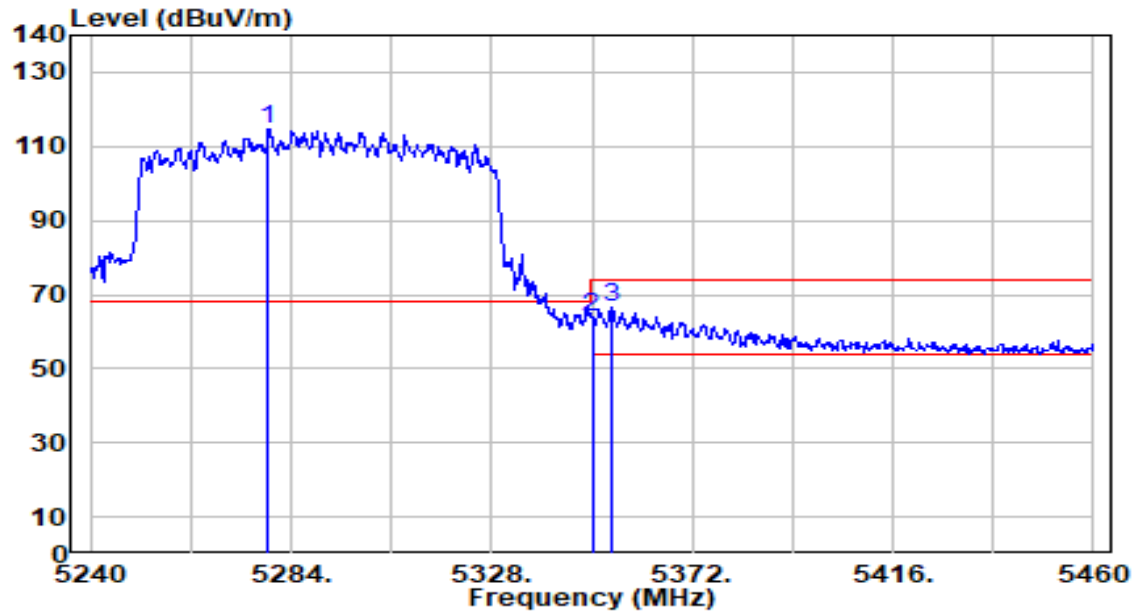


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5278.940	112.82	1.79	114.61	N/A	N/A	0	0	Peak
2	5350.000	62.39	1.69	64.08	-9.92	74.00	0	0	Peak
3	* 5354.180	64.96	1.69	66.64	-7.36	74.00	0	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1+3	Test Voltage	AC 120V/60Hz

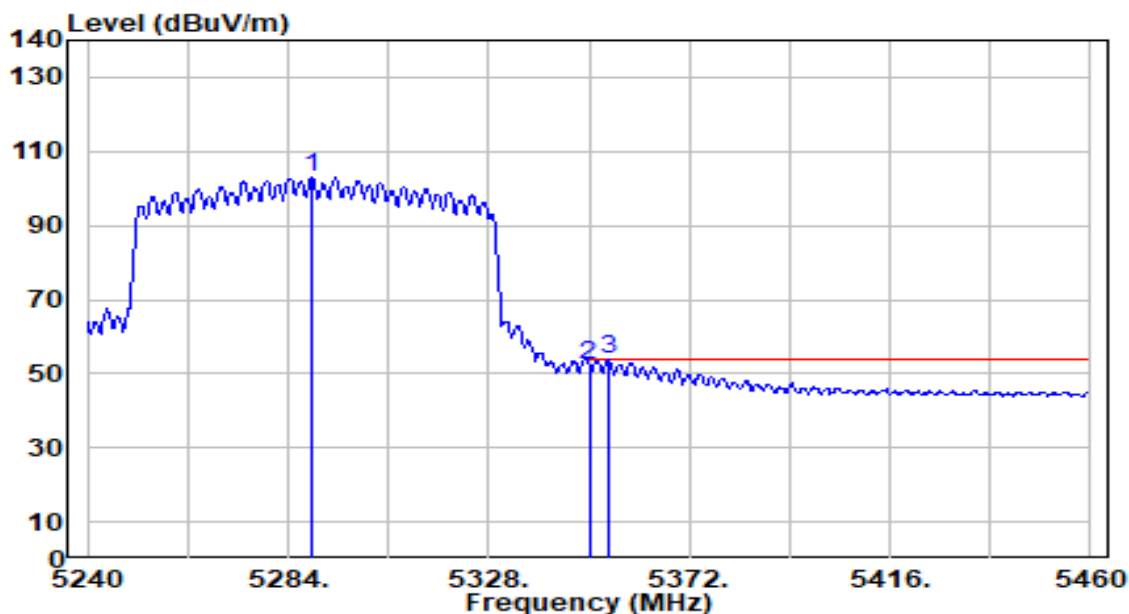


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5289.280	101.40	1.77	103.17	N/A	N/A	173	151	Average
2	5350.000	50.35	1.69	52.04	-1.96	54.00	173	151	Average
3	* 5354.400	52.04	1.69	53.72	-0.28	54.00	173	151	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

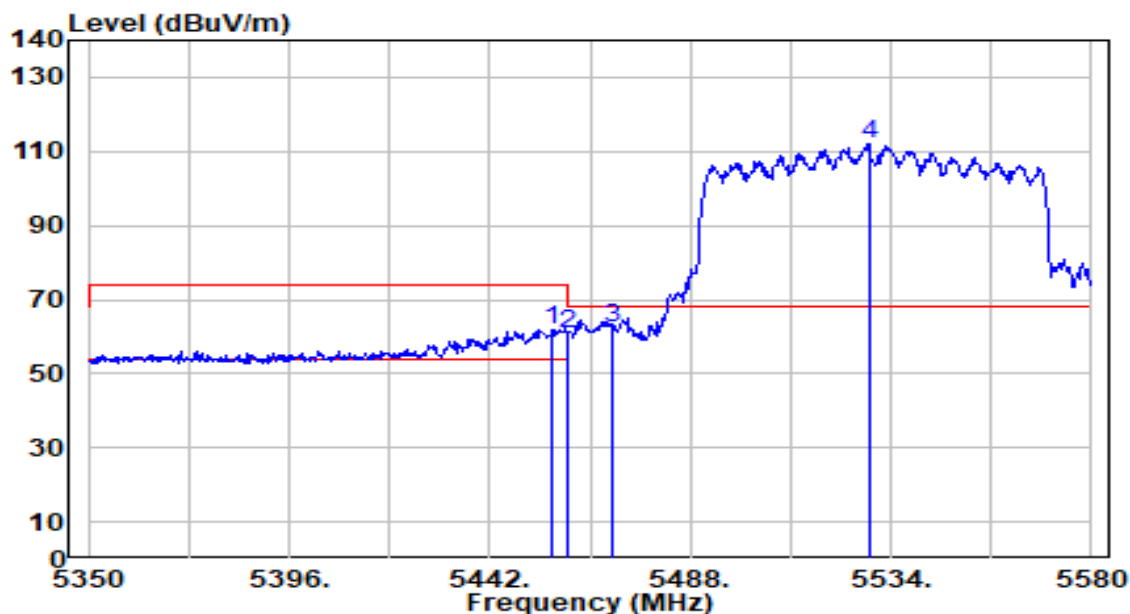


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.490	60.18	1.86	62.04	-11.96	74.00	208	206	Peak
2	5460.000	58.84	1.87	60.71	-13.29	74.00	208	206	Peak
3	* 5470.000	60.43	1.92	62.34	-5.86	68.20	208	206	Peak
4	5528.940	109.76	2.18	111.94	N/A	N/A	208	206	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

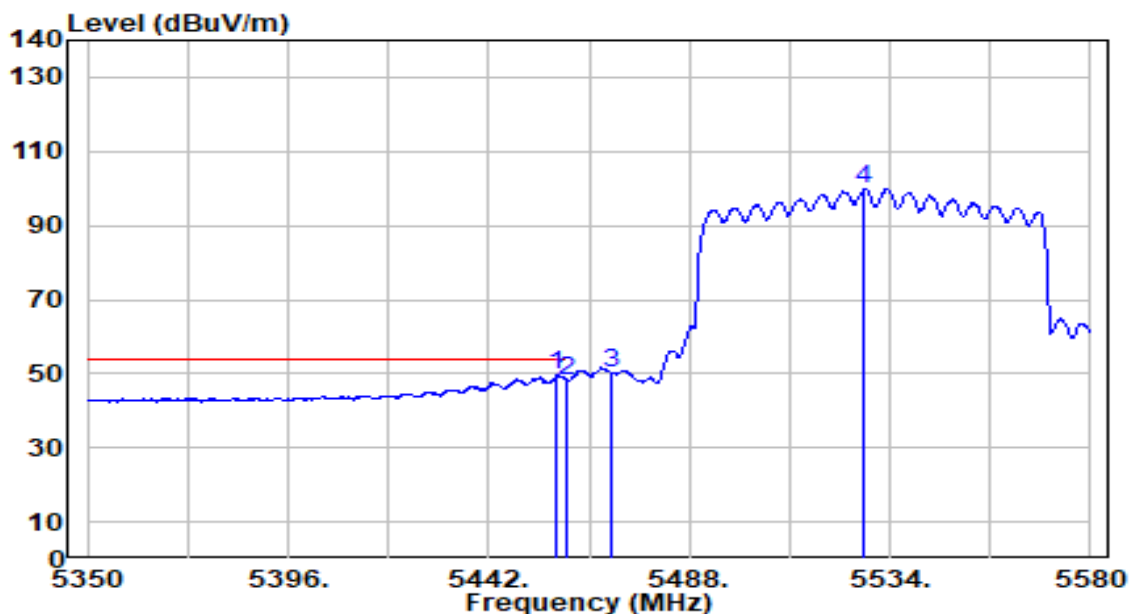


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.640	47.69	1.86	49.55	-4.45	54.00	208	206	Average
2		5460.000	46.42	1.87	48.30	-5.70	54.00	208	206	Average
3		5470.000	48.17	1.92	50.08	N/A	N/A	208	206	Average
4		5528.020	97.60	2.18	99.78	N/A	N/A	208	206	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

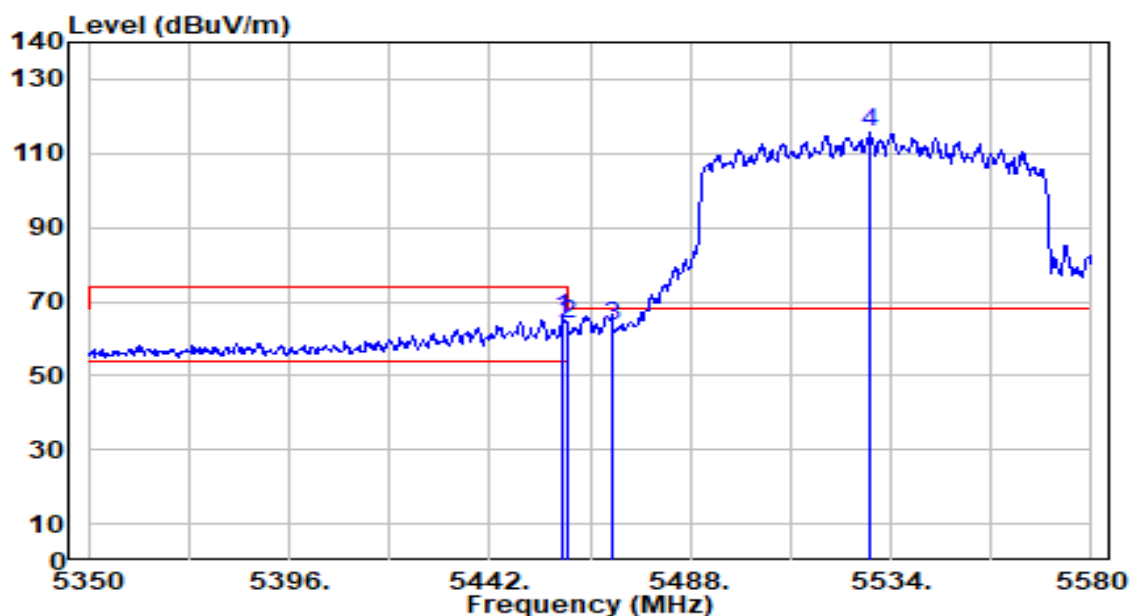


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.790	63.83	1.87	65.70	-8.30	74.00	200	154	Peak
2	5460.000	62.05	1.87	63.92	-10.08	74.00	200	154	Peak
3	* 5470.000	61.69	1.92	63.60	-4.60	68.20	200	154	Peak
4	5529.400	113.52	2.19	115.70	N/A	N/A	200	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamp(10dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1+3	Test Voltage	AC 120V/60Hz

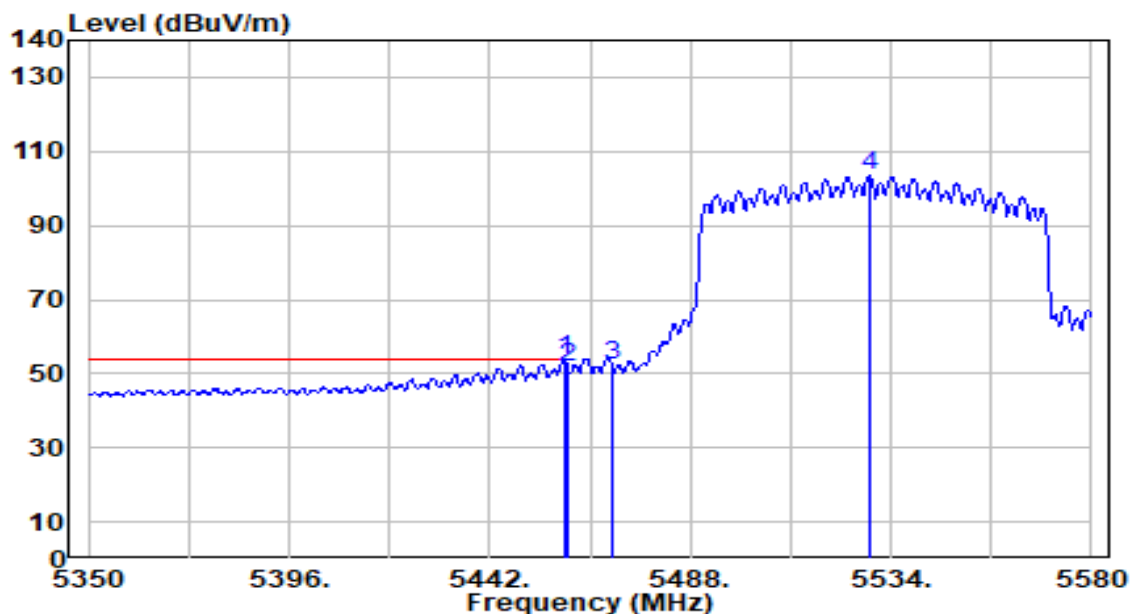


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5459.020	51.93	1.87	53.80	-0.20	54.00	200	154	Average
2		5460.000	49.81	1.87	51.68	-2.32	54.00	200	154	Average
3		5470.000	50.21	1.92	52.12	N/A	N/A	200	154	Average
4		5528.940	101.34	2.18	103.52	N/A	N/A	200	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+3	Test Voltage	AC 120V/60Hz

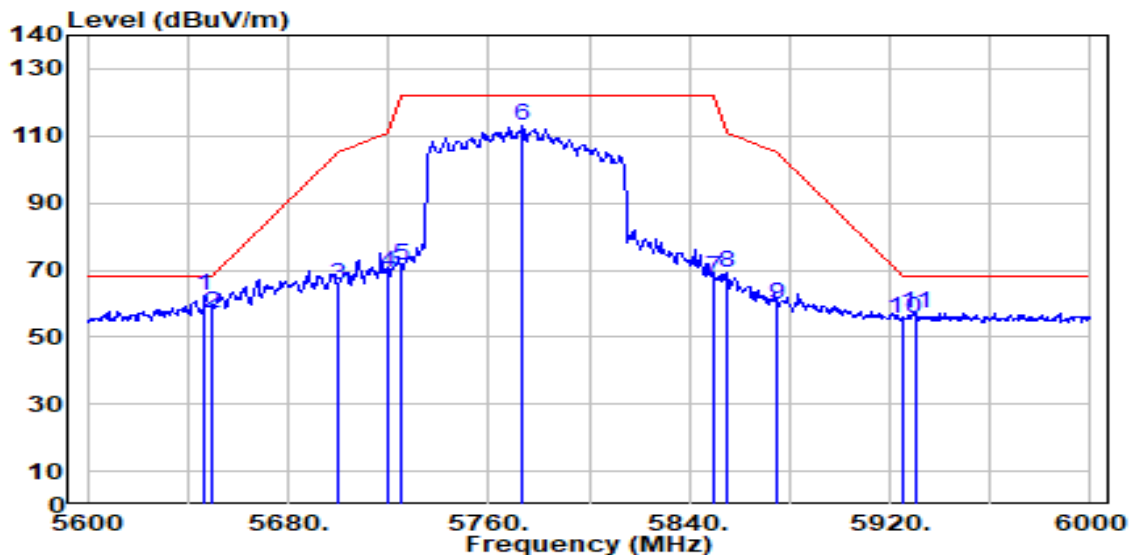


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.800	59.68	2.76	62.44	-5.76	68.20	206	355	Peak
2		5650.000	54.43	2.78	57.21	-10.99	68.20	206	355	Peak
3		5700.000	62.45	3.02	65.47	-39.73	105.20	206	355	Peak
4		5720.000	66.00	3.12	69.11	-41.69	110.80	206	355	Peak
5		5725.000	68.18	3.14	71.32	-50.88	122.20	206	355	Peak
6		5773.200	109.59	3.38	112.97	N/A	N/A	206	355	Peak
7		5850.000	64.21	3.51	67.71	-54.49	122.20	206	355	Peak
8		5855.000	65.46	3.51	68.97	-41.83	110.80	206	355	Peak
9		5875.000	55.95	3.50	59.45	-45.75	105.20	206	355	Peak
10		5925.000	51.86	3.51	55.37	-12.83	68.20	206	355	Peak
11		5930.000	53.48	3.51	57.00	-11.20	68.20	206	355	Peak

Note

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1+3	Test Voltage	AC 120V/60Hz

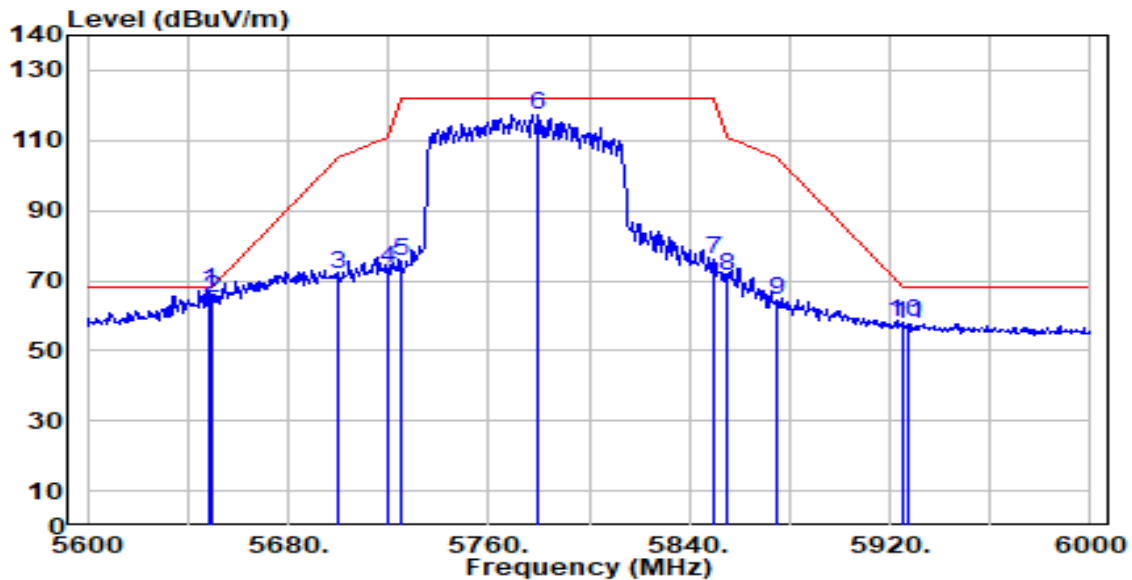


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.800	64.43	2.77	67.20	-1.00	68.20	202	347	Peak
2		5650.000	62.19	2.78	64.97	-3.23	68.20	202	347	Peak
3		5700.000	68.98	3.02	71.99	-33.21	105.20	202	347	Peak
4		5720.000	70.47	3.12	73.59	-37.21	110.80	202	347	Peak
5		5725.000	72.33	3.14	75.47	-46.73	122.20	202	347	Peak
6		5779.600	114.01	3.41	117.42	N/A	N/A	202	347	Peak
7		5850.000	72.32	3.51	75.83	-46.37	122.20	202	347	Peak
8		5855.000	67.65	3.51	71.16	-39.64	110.80	202	347	Peak
9		5875.000	60.89	3.50	64.40	-40.80	105.20	202	347	Peak
10		5925.000	54.62	3.51	58.14	-10.06	68.20	202	347	Peak
11		5927.200	54.29	3.51	57.80	-10.40	68.20	202	347	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

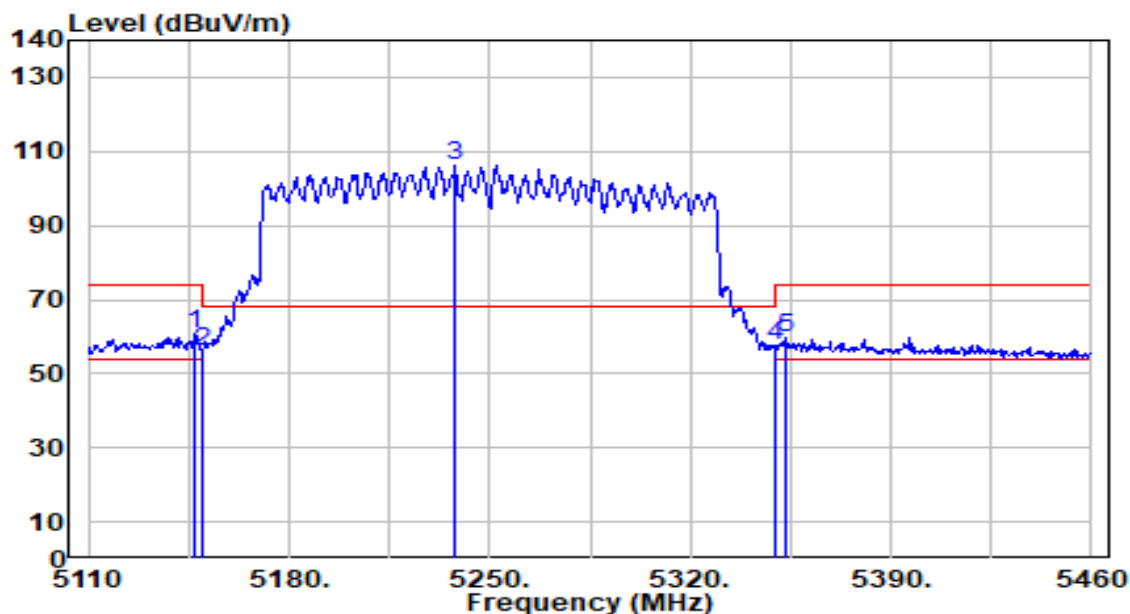


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.100	58.70	1.81	60.52	-13.48	74.00	281	6	Peak
2		5150.000	54.39	1.82	56.20	-17.80	74.00	281	6	Peak
3		5238.100	104.46	1.85	106.31	N/A	N/A	281	6	Peak
4		5350.000	55.99	1.69	57.69	-16.31	74.00	281	6	Peak
5		5352.900	57.93	1.69	59.62	-14.38	74.00	281	6	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

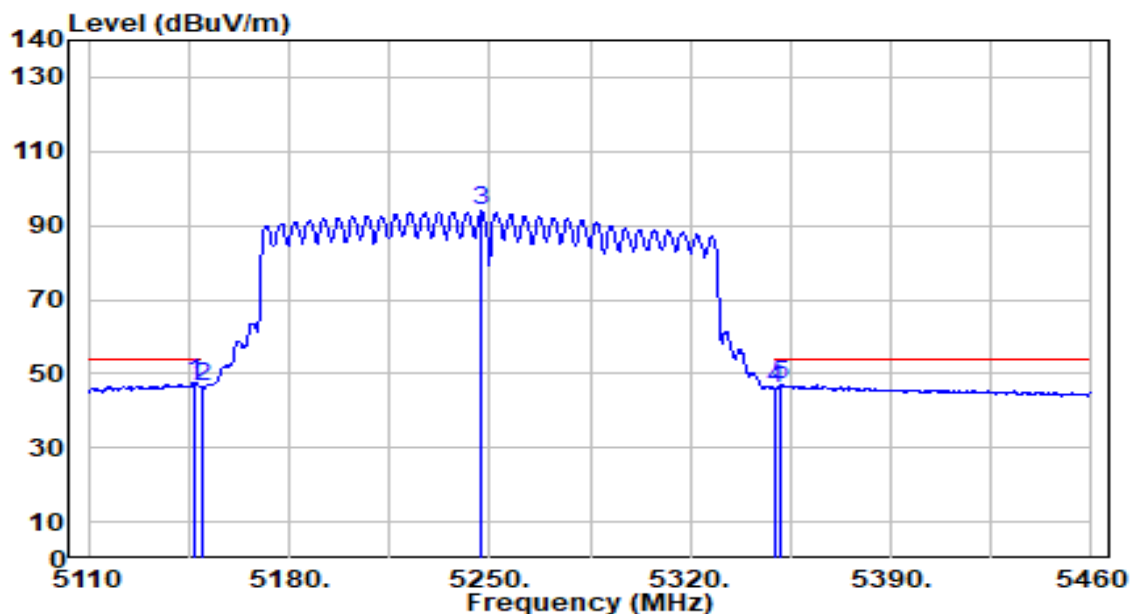


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.100	45.80	1.81	47.62	-6.38	54.00	281	6	Average
2		5150.000	44.68	1.82	46.50	-7.50	54.00	281	6	Average
3		5247.200	92.04	1.83	93.87	N/A	N/A	281	6	Average
4		5350.000	44.35	1.69	46.04	-7.96	54.00	281	6	Average
5		5351.850	45.26	1.69	46.95	-7.05	54.00	281	6	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

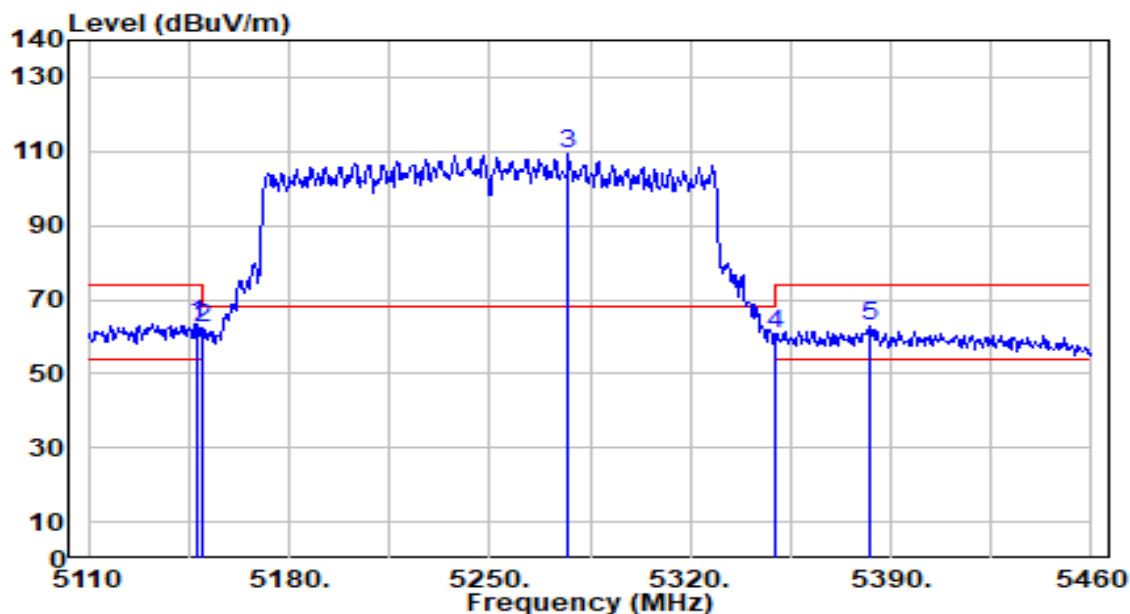


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	61.68	1.82	63.49	-10.51	74.00	136	248	Peak
2		5150.000	60.29	1.82	62.11	-11.89	74.00	136	248	Peak
3		5277.650	107.52	1.79	109.31	N/A	N/A	136	248	Peak
4		5350.000	58.94	1.69	60.63	-13.37	74.00	136	248	Peak
5		5382.300	61.40	1.65	63.05	-10.95	74.00	136	248	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE17000 Whole Home Mesh Wi-Fi 7 System	Date of Test	2025-05-06
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1+3	Test Voltage	AC 120V/60Hz

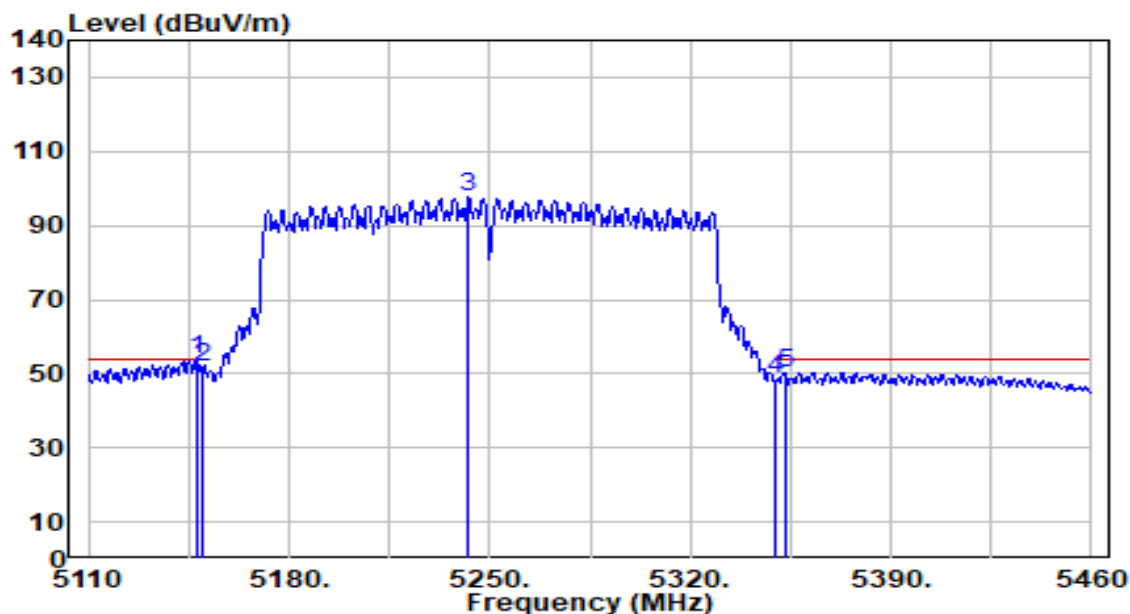

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	51.93	1.82	53.74	-0.26	54.00	136	248	Average
2		5150.000	50.04	1.82	51.86	-2.14	54.00	136	248	Average
3		5242.650	95.69	1.84	97.53	N/A	N/A	136	248	Average
4		5350.000	46.83	1.69	48.52	-5.48	54.00	136	248	Average
5		5353.250	48.71	1.69	50.39	-3.61	54.00	136	248	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.