


|             |                                         |               |              |
|-------------|-----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                  | Test Date     | 2025-03-20   |
| Temperature | 22.7 °C                                 | Humidity      | 30.4 %       |
| Limit       | FCC_Part 15.209_RSE (3m)                | Test Engineer | Ajin Fan     |
| Factor      | VULB 9168_00662                         | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router          | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11 be-EHT320 at 6105MHz |               |              |

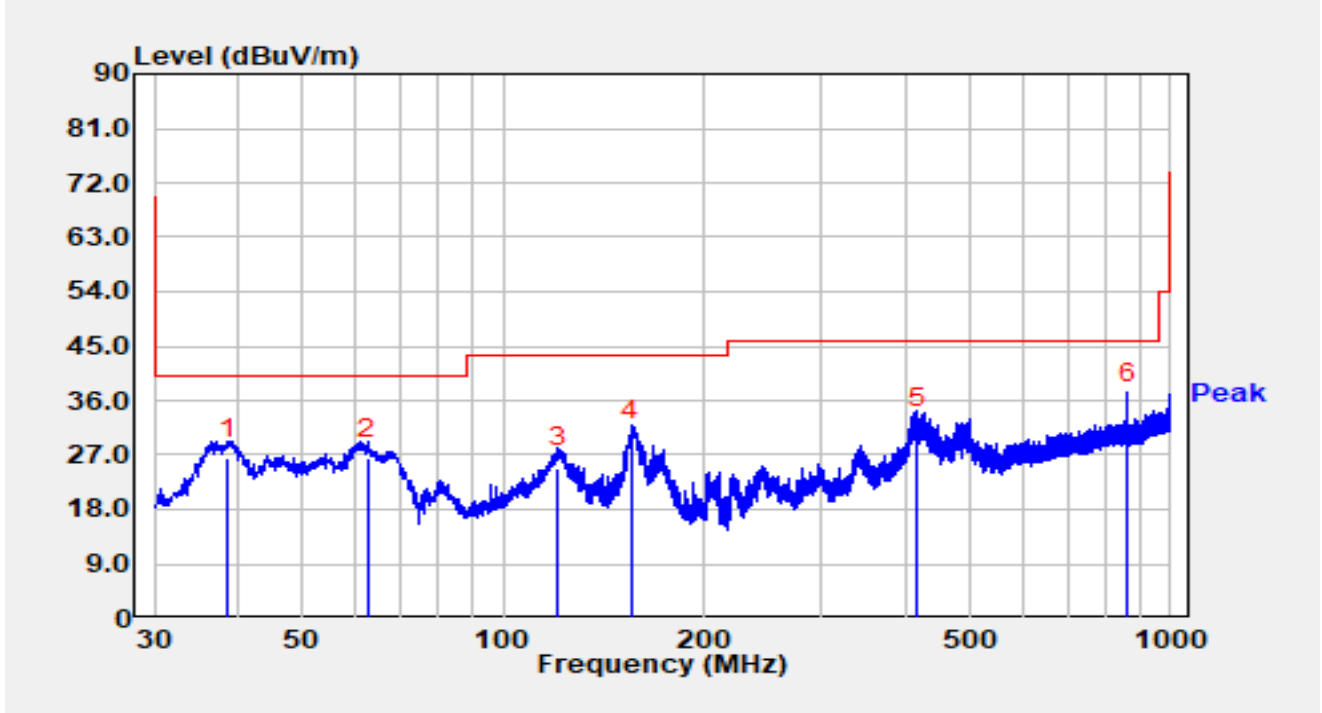


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 38.73           | 8.62           | 17.84      | 26.46                | -13.54      | 40.00          | QP       |
| 2  |      | 62.69           | 8.62           | 17.87      | 26.49                | -13.51      | 40.00          | QP       |
| 3  |      | 120.99          | 8.64           | 16.29      | 24.93                | -18.57      | 43.50          | QP       |
| 4  |      | 155.81          | 11.15          | 18.30      | 29.45                | -14.05      | 43.50          | QP       |
| 5  |      | 418.29          | 9.65           | 21.69      | 31.34                | -14.66      | 46.00          | QP       |
| 6  | *    | 863.91          | 6.01           | 29.42      | 35.43                | -10.57      | 46.00          | QP       |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

### A.9 Radiated Restricted Band Edge Test Result

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE20 at 5955MHz |               |              |

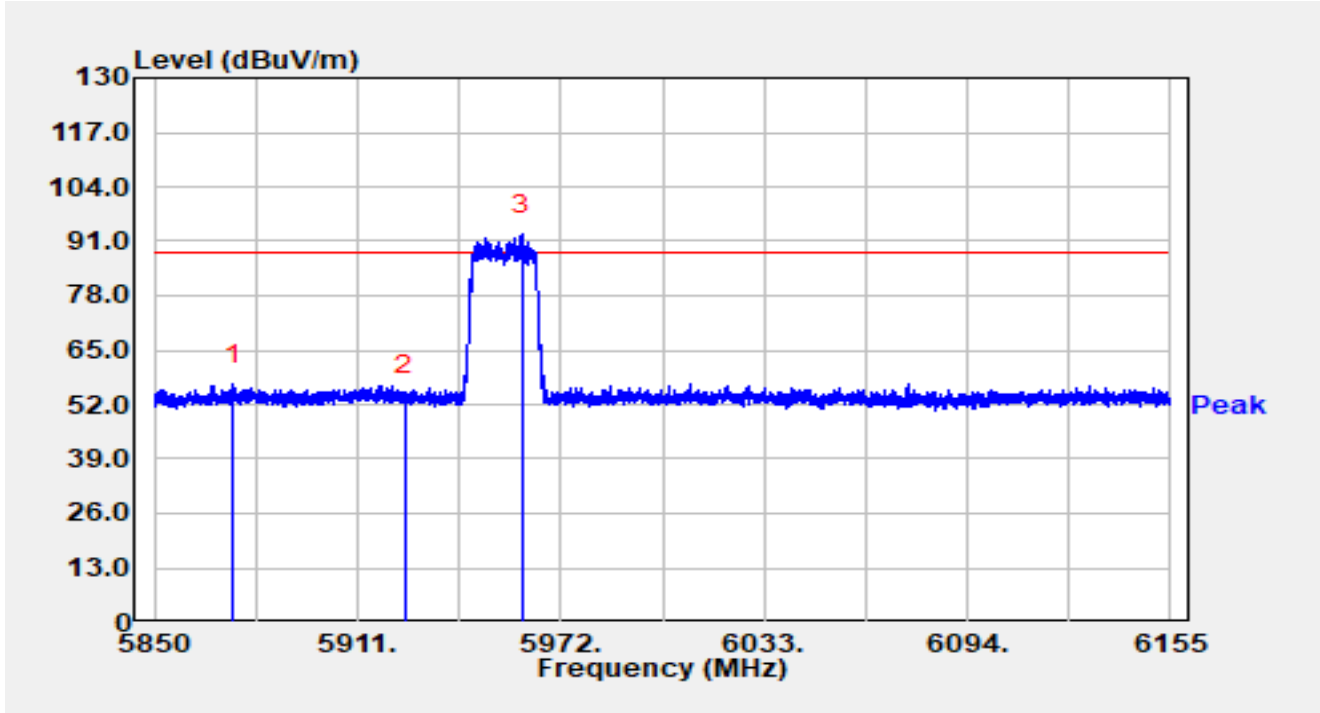


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5873.790        | 36.01          | 20.78      | 56.78                | -31.42      | 88.20          | Peak     |
| 2  |      | 5925.000        | 33.23          | 21.12      | 54.35                | -33.85      | 88.20          | Peak     |
| 3  |      | 5960.196        | 71.79          | 20.80      | 92.59                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE20 at 5955MHz |               |              |

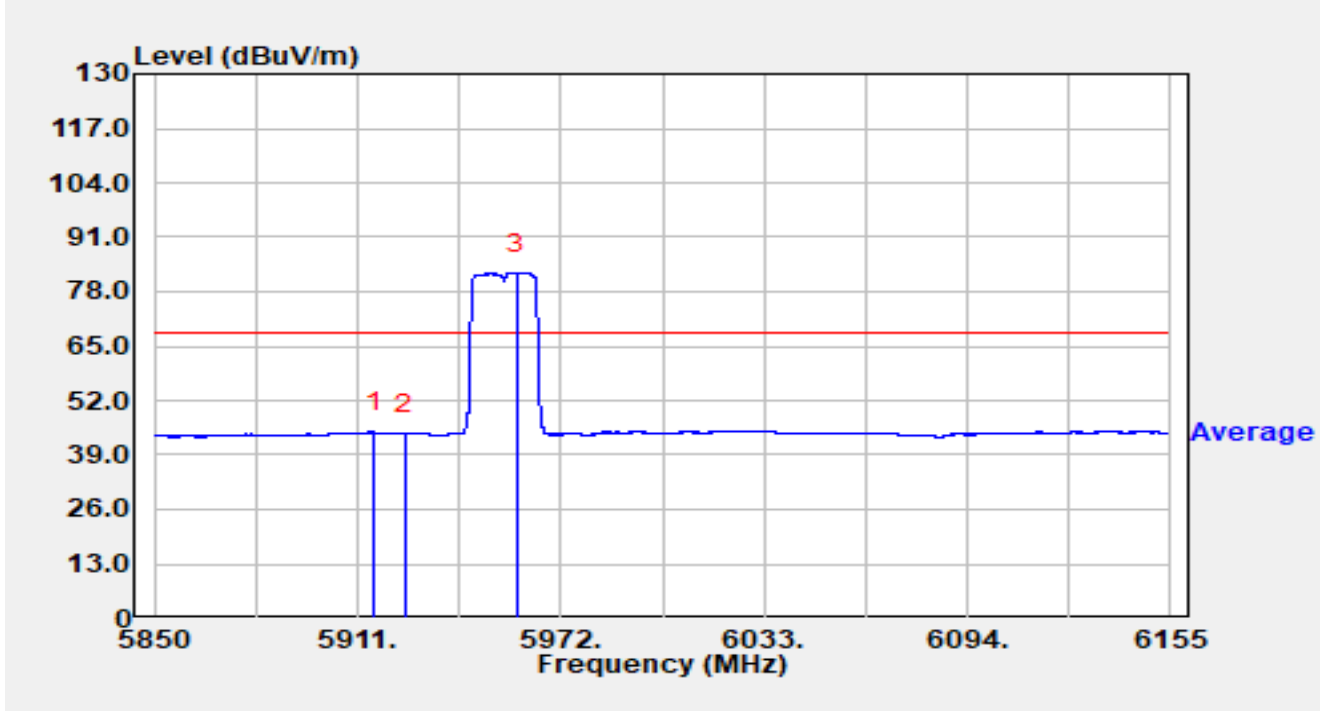


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5916.033        | 23.31          | 21.10      | 44.41                | -23.79      | 68.20          | Average  |
| 2  |      | 5925.000        | 22.97          | 21.12      | 44.09                | -24.11      | 68.20          | Average  |
| 3  |      | 5958.732        | 61.61          | 20.81      | 82.41                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE20 at 5955MHz |               |              |

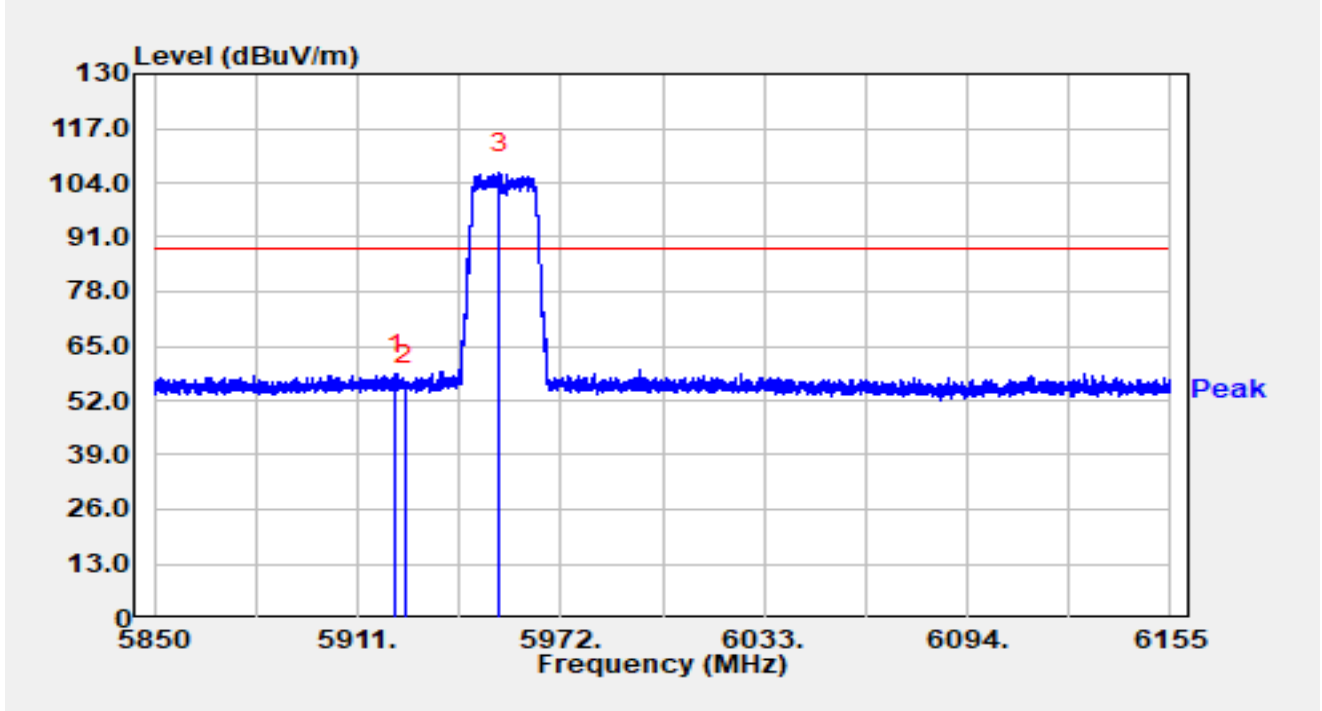


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5922.590        | 37.16          | 21.12      | 58.28                | -29.92      | 88.20          | Peak     |
| 2  |      | 5925.000        | 34.49          | 21.12      | 55.61                | -32.59      | 88.20          | Peak     |
| 3  |      | 5953.456        | 85.53          | 20.83      | 106.36               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE20 at 5955MHz |               |              |

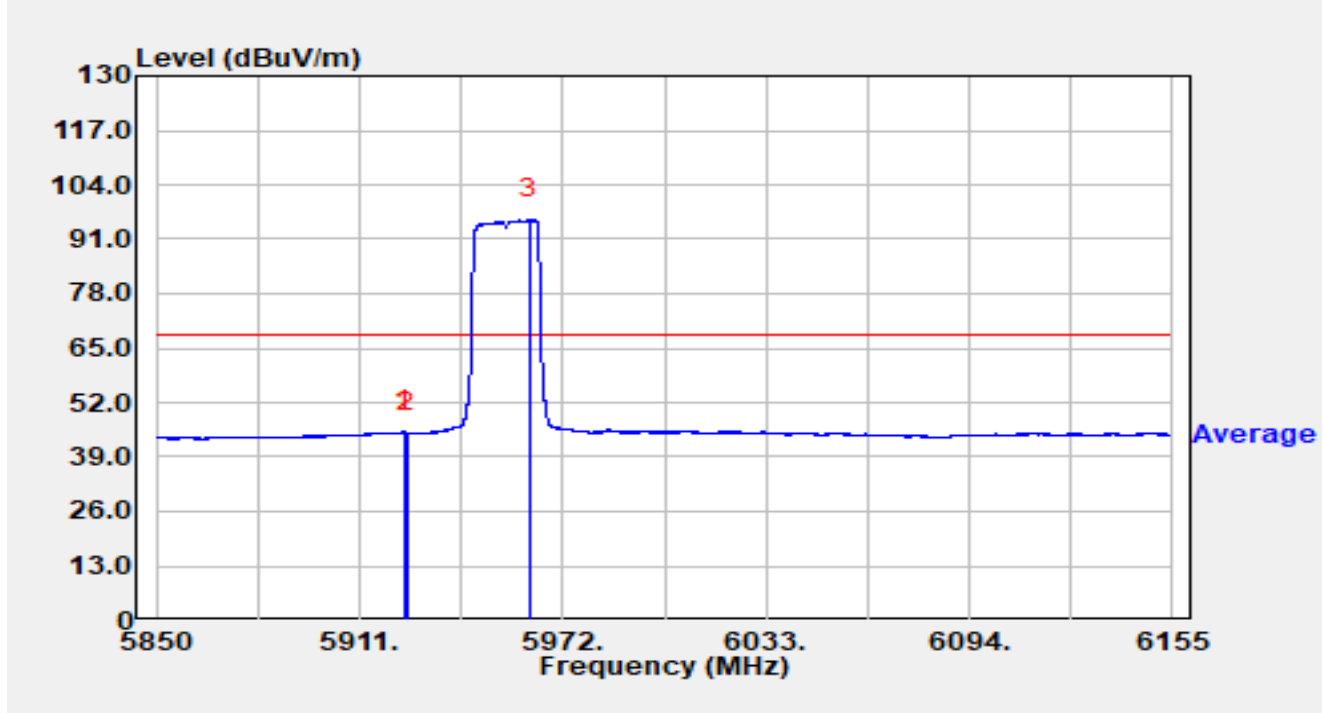


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5924.237        | 24.05          | 21.12      | 45.18                | -23.02      | 68.20          | Average  |
| 2  |      | 5925.000        | 23.59          | 21.12      | 44.71                | -23.49      | 68.20          | Average  |
| 3  |      | 5962.057        | 75.03          | 20.79      | 95.82                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE20 at 7095MHz |               |              |

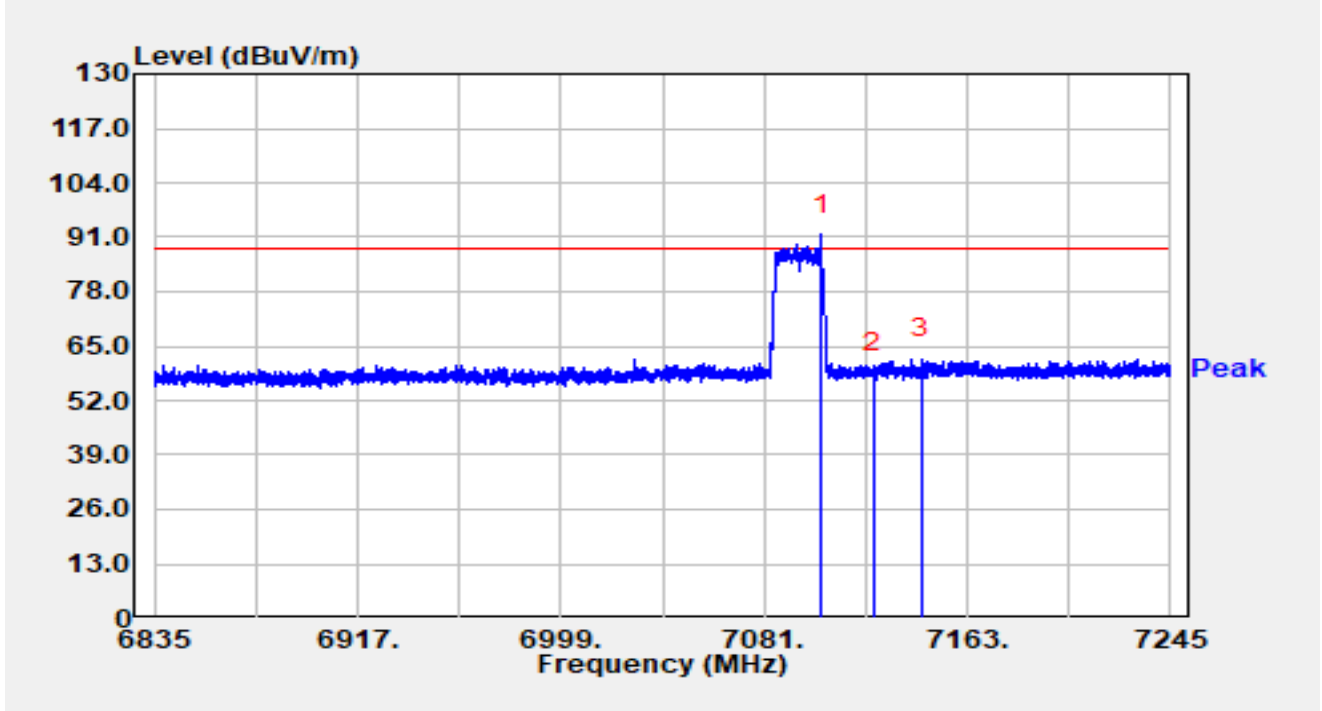


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7104.001        | 67.37          | 24.14      | 91.51                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 33.90          | 24.48      | 58.38                | -29.82      | 88.20          | Peak     |
| 3  | *    | 7144.673        | 37.20          | 24.72      | 61.92                | -26.28      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE20 at 7095MHz |               |              |

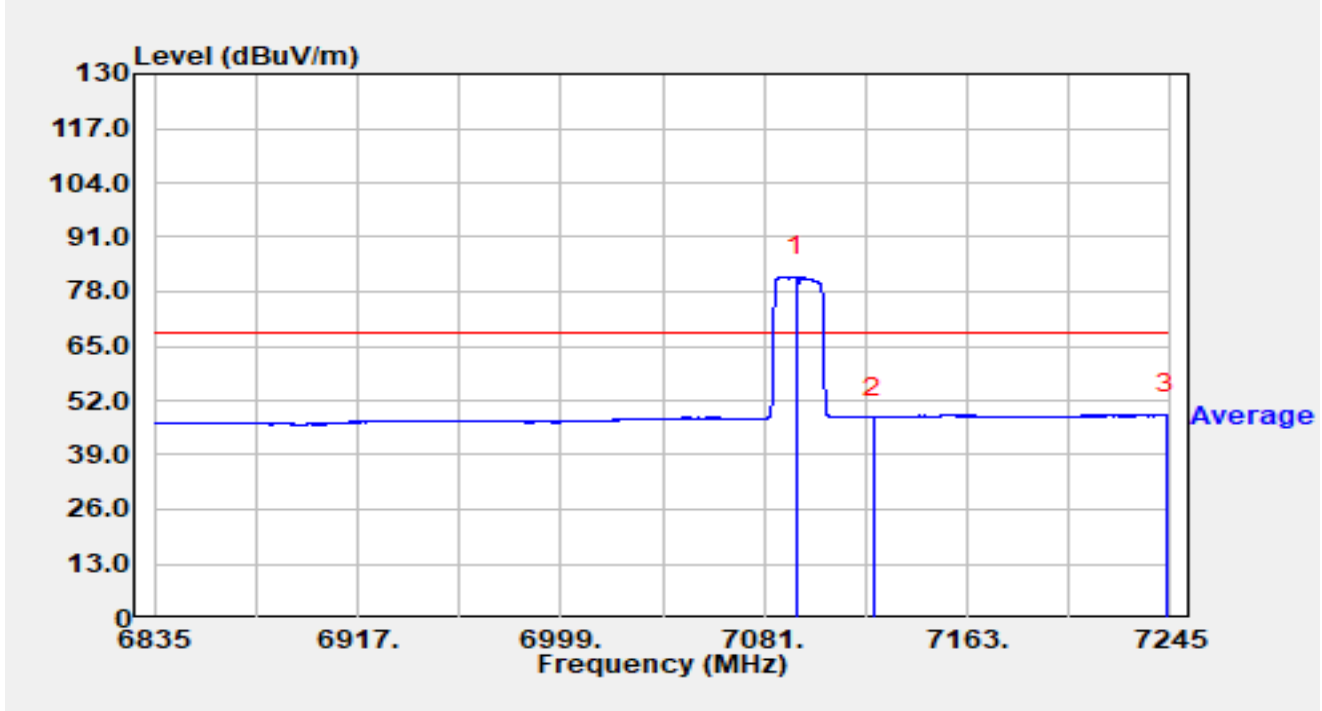


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7093.874        | 57.37          | 24.08      | 81.44                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 23.50          | 24.48      | 47.98                | -20.22      | 68.20          | Average  |
| 3  | *    | 7243.155        | 23.67          | 24.90      | 48.57                | -19.63      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE20 at 7095MHz |               |              |

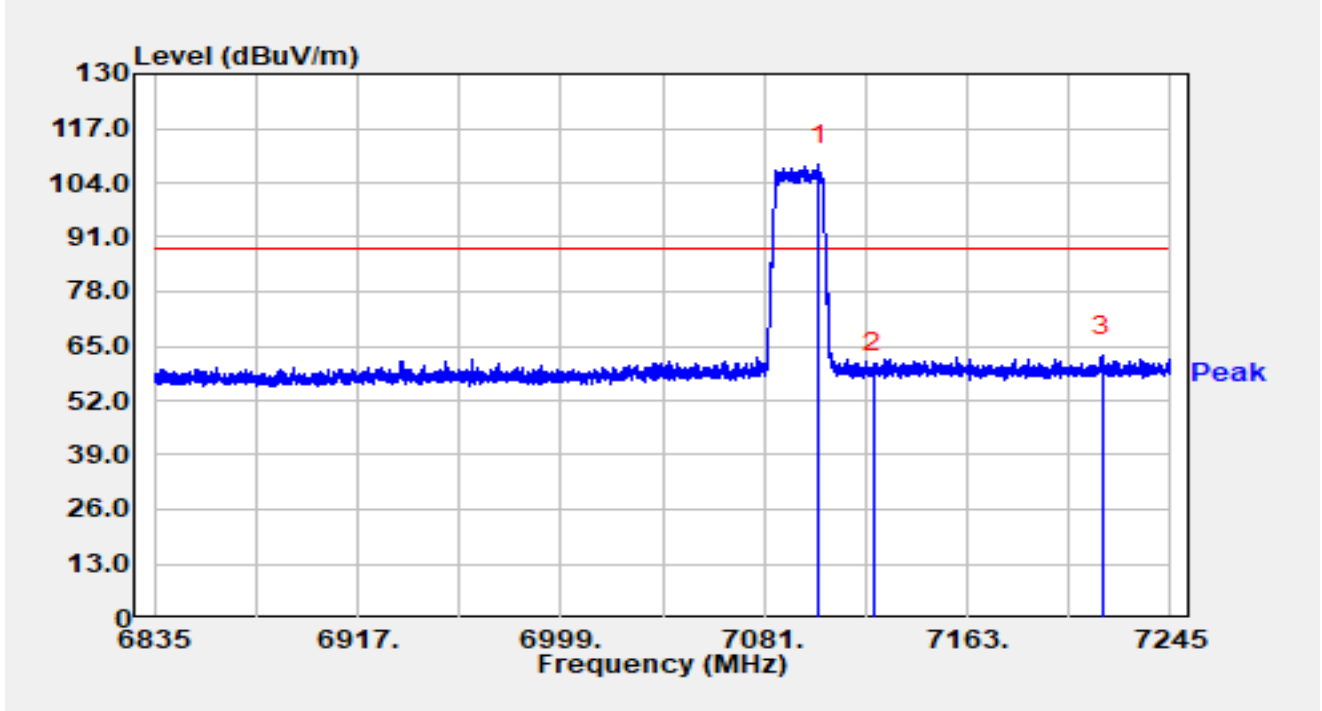


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7103.222        | 84.09          | 24.12      | 108.21               | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 34.11          | 24.48      | 58.59                | -29.61      | 88.20          | Peak     |
| 3  | *    | 7217.653        | 38.06          | 24.70      | 62.76                | -25.44      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE20 at 7095MHz |               |              |

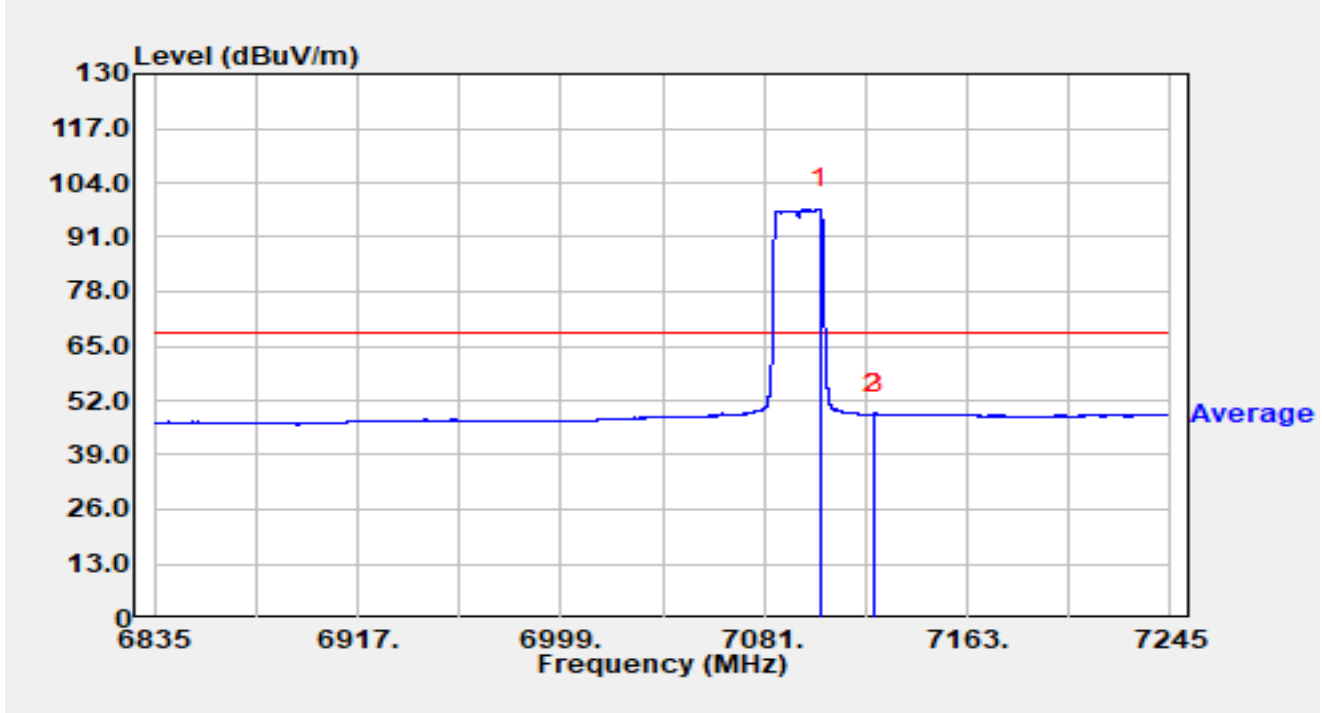


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7103.837        | 73.62          | 24.13      | 97.75                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 24.19          | 24.48      | 48.67                | -19.53      | 68.20          | Average  |
| 3  | *    | 7125.608        | 24.51          | 24.49      | 49.00                | -19.20      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE40 at 5965MHz |               |              |

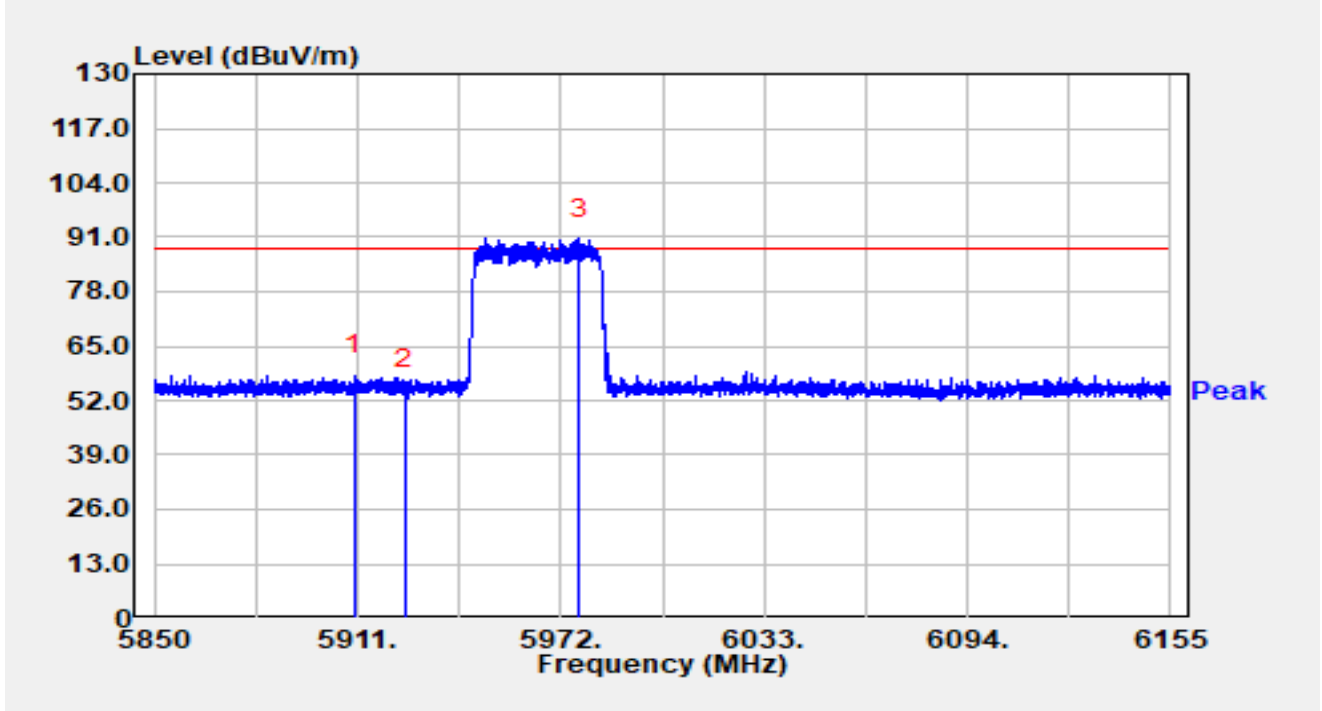


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5910.116        | 37.07          | 21.06      | 58.13                | -30.07      | 88.20          | Peak     |
| 2  |      | 5925.000        | 33.61          | 21.12      | 54.73                | -33.47      | 88.20          | Peak     |
| 3  |      | 5977.551        | 69.67          | 20.95      | 90.62                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE40 at 5965MHz |               |              |

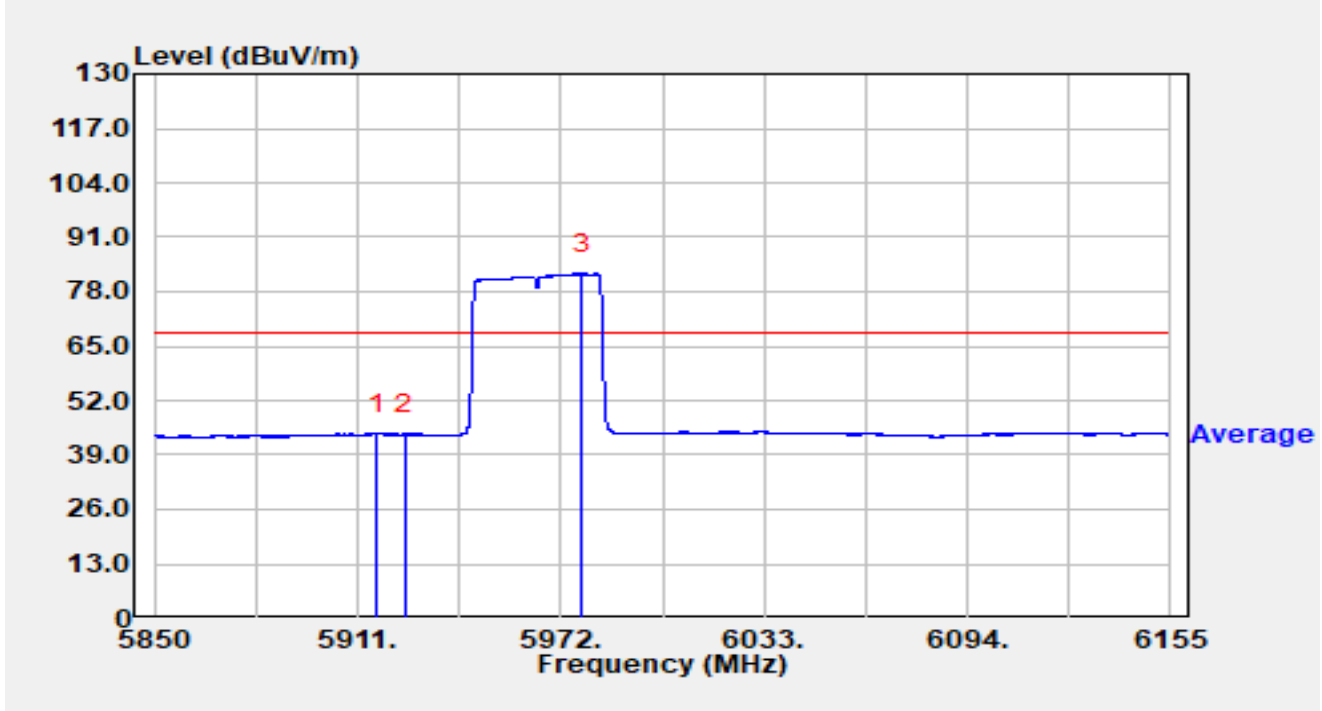


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5916.856        | 22.99          | 21.10      | 44.09                | -24.11      | 68.20          | Average  |
| 2  |      | 5925.000        | 22.75          | 21.12      | 43.88                | -24.32      | 68.20          | Average  |
| 3  |      | 5978.283        | 61.35          | 20.95      | 82.31                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE40 at 5965MHz |               |              |

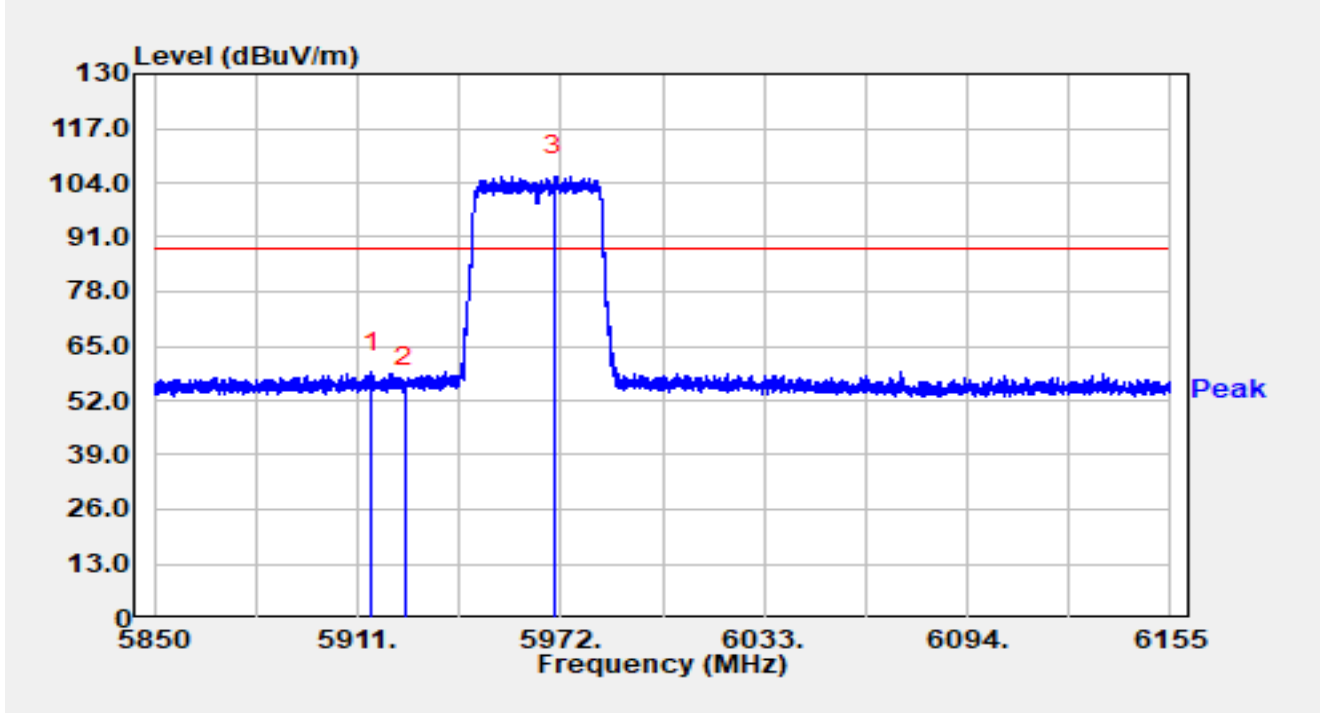


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5915.209        | 37.74          | 21.10      | 58.84                | -29.36      | 88.20          | Peak     |
| 2  |      | 5925.000        | 34.16          | 21.12      | 55.28                | -32.92      | 88.20          | Peak     |
| 3  |      | 5970.018        | 84.78          | 20.85      | 105.64               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE40 at 5965MHz |               |              |

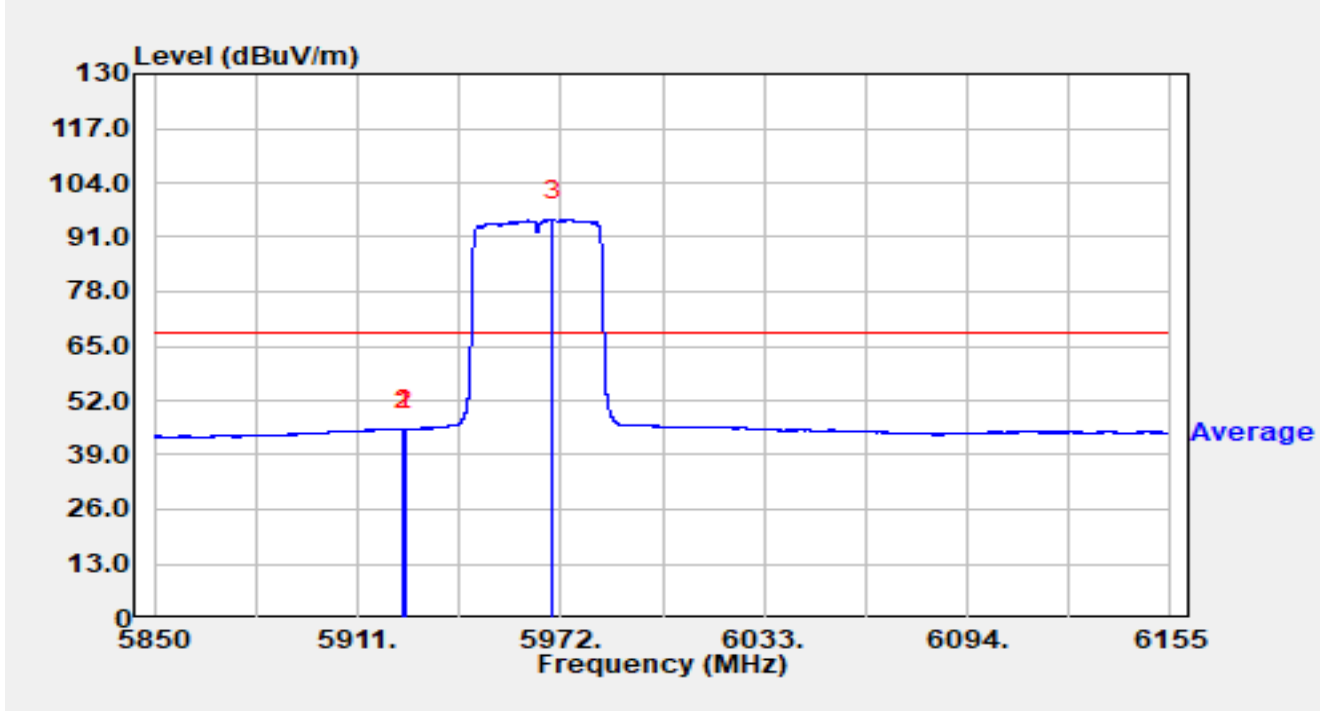


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5924.877        | 24.00          | 21.12      | 45.12                | -23.08      | 68.20          | Average  |
| 2  |      | 5925.000        | 23.98          | 21.12      | 45.10                | -23.10      | 68.20          | Average  |
| 3  |      | 5969.590        | 74.31          | 20.85      | 95.16                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE40 at 7085MHz |               |              |

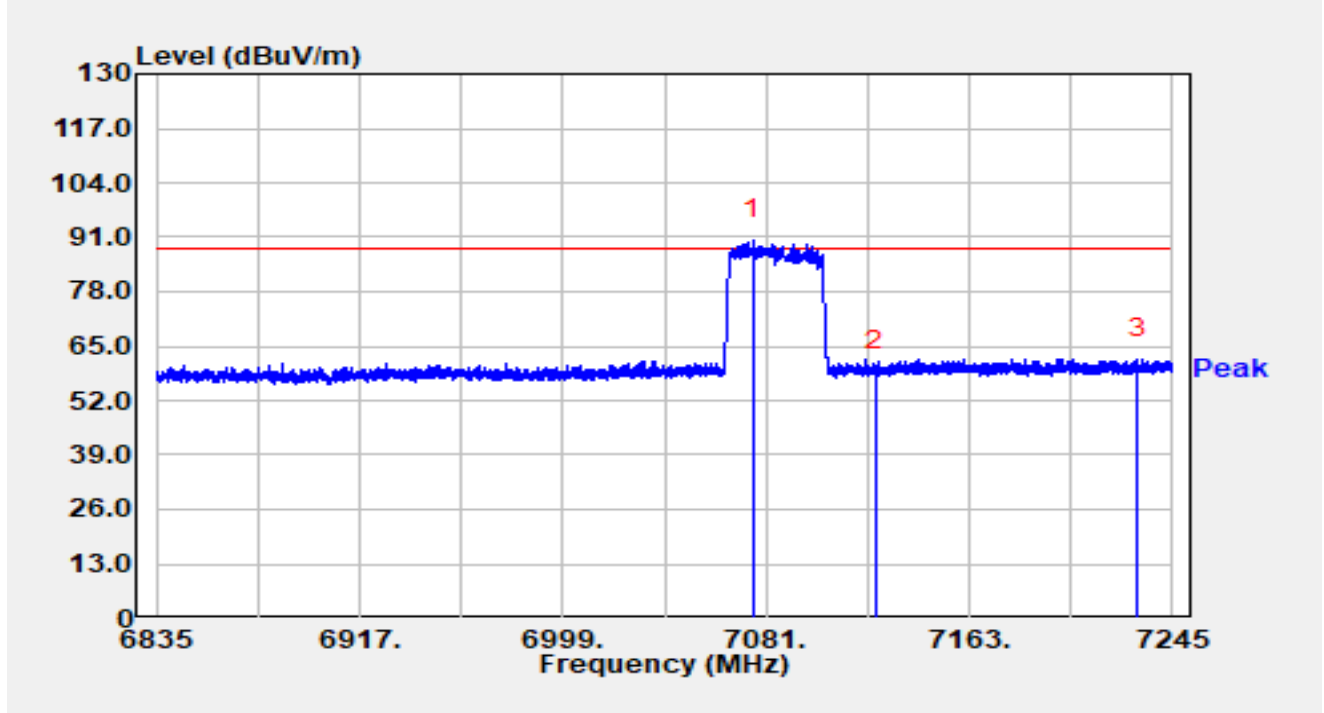


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7075.588        | 66.27          | 24.08      | 90.35                | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 34.46          | 24.48      | 58.94                | -29.26      | 88.20          | Peak     |
| 3  | *    | 7230.732        | 37.10          | 24.76      | 61.86                | -26.34      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE40 at 7085MHz |               |              |

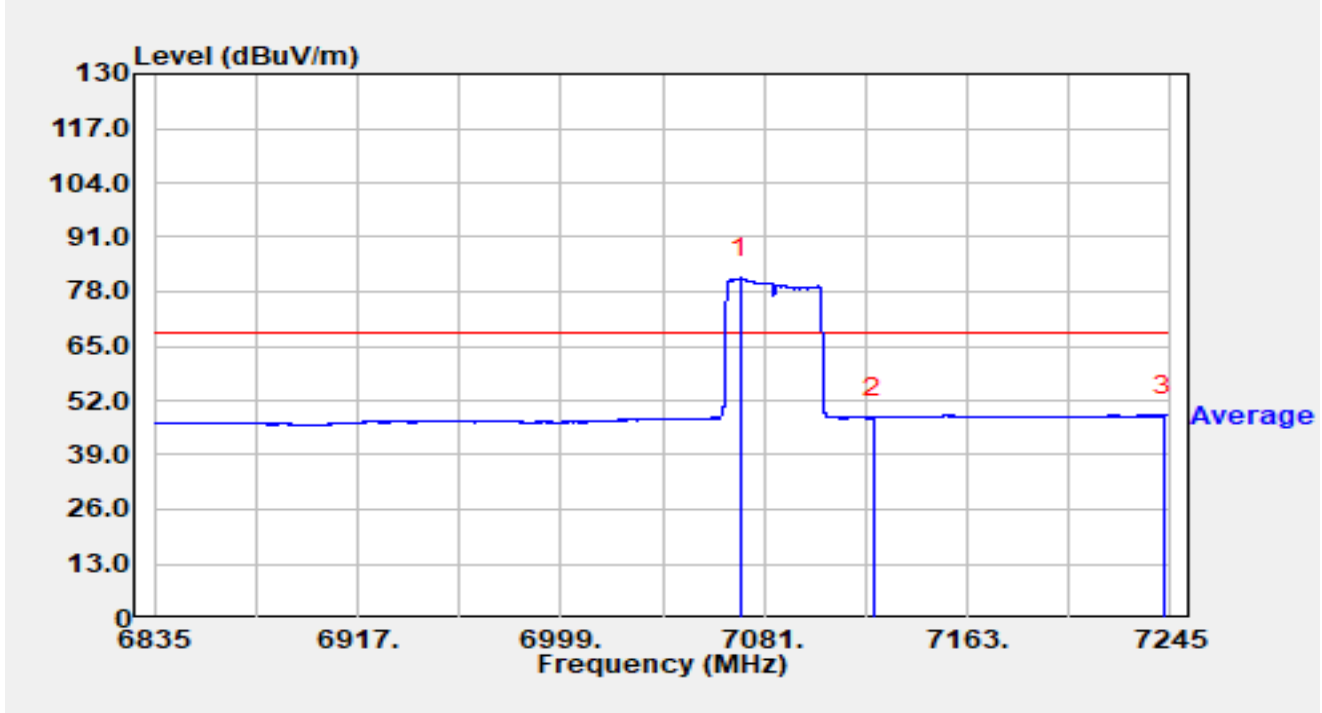


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7071.611        | 57.13          | 24.11      | 81.24                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 23.35          | 24.48      | 47.84                | -20.36      | 68.20          | Average  |
| 3  | *    | 7242.253        | 23.63          | 24.89      | 48.52                | -19.68      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE40 at 7085MHz |               |              |

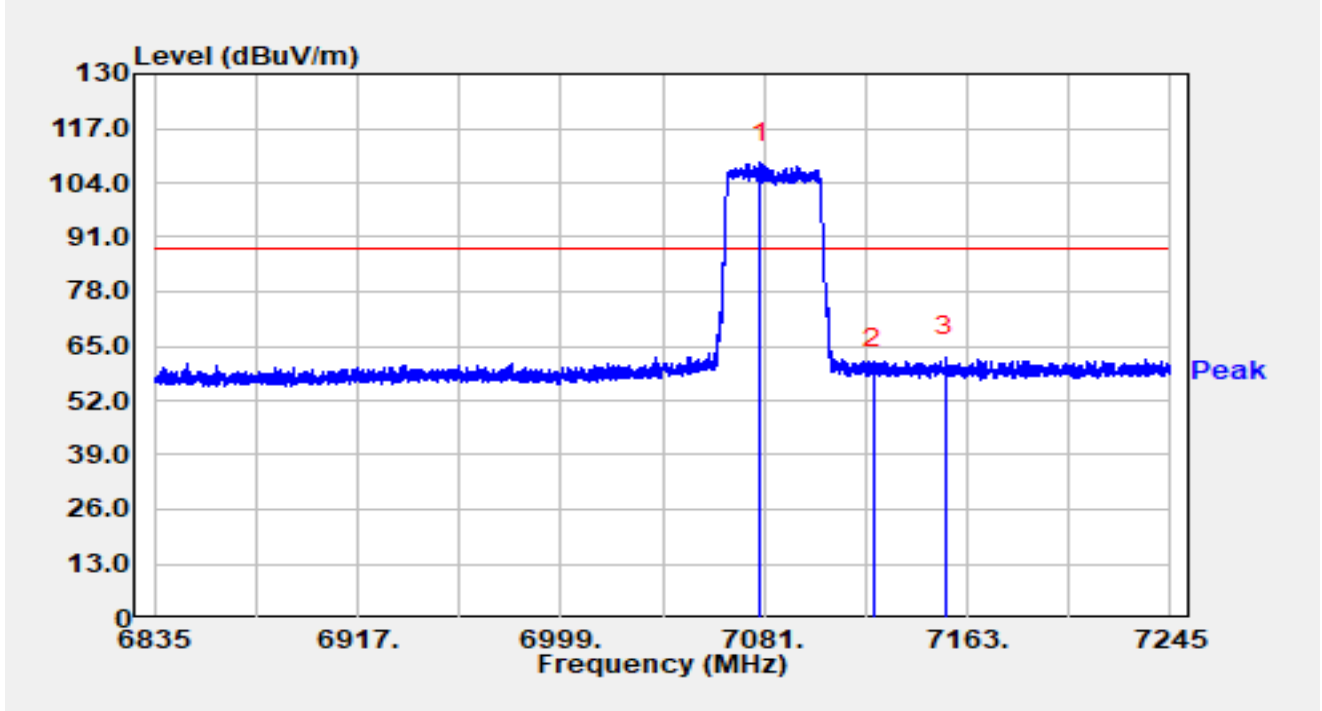


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7079.360        | 84.60          | 24.07      | 108.67               | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 35.00          | 24.48      | 59.49                | -28.71      | 88.20          | Peak     |
| 3  | *    | 7154.021        | 37.63          | 24.80      | 62.43                | -25.77      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE40 at 7085MHz |               |              |

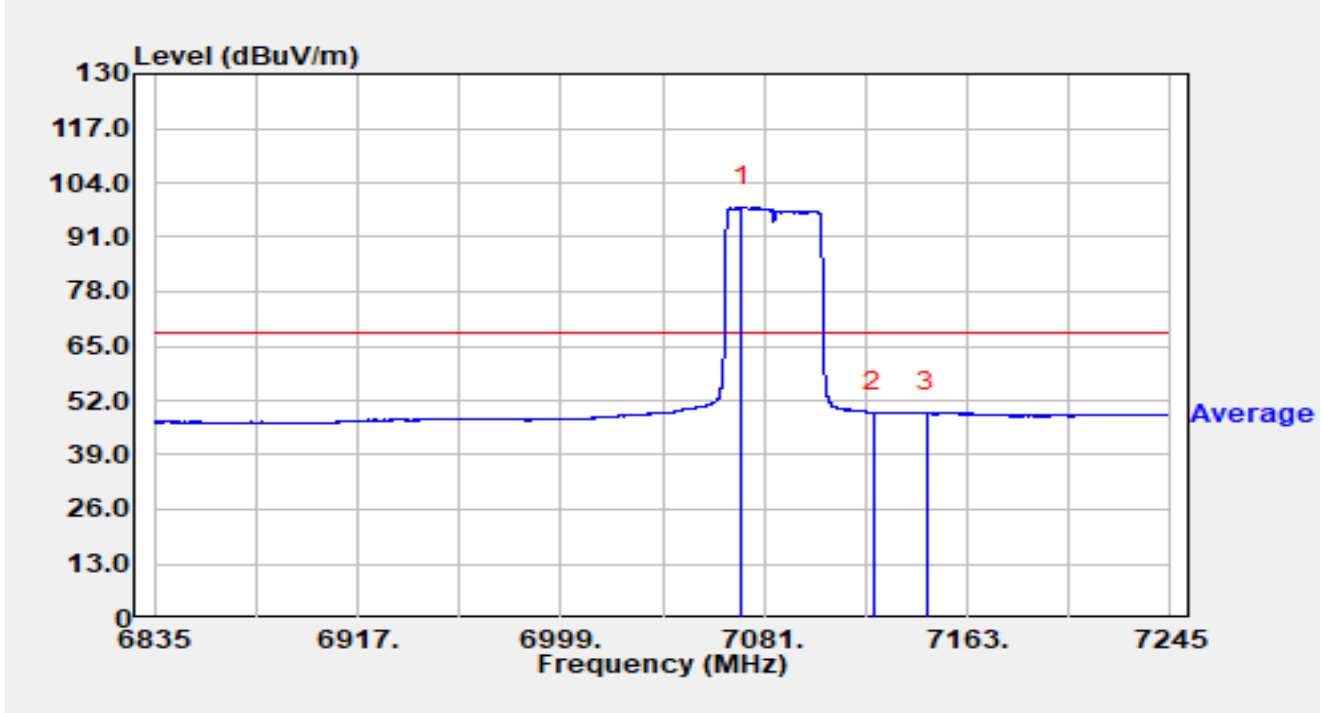


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7071.693        | 74.16          | 24.11      | 98.27                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 24.65          | 24.48      | 49.13                | -19.07      | 68.20          | Average  |
| 3  | *    | 7146.436        | 24.53          | 24.74      | 49.27                | -18.93      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE80 at 5985MHz |               |              |

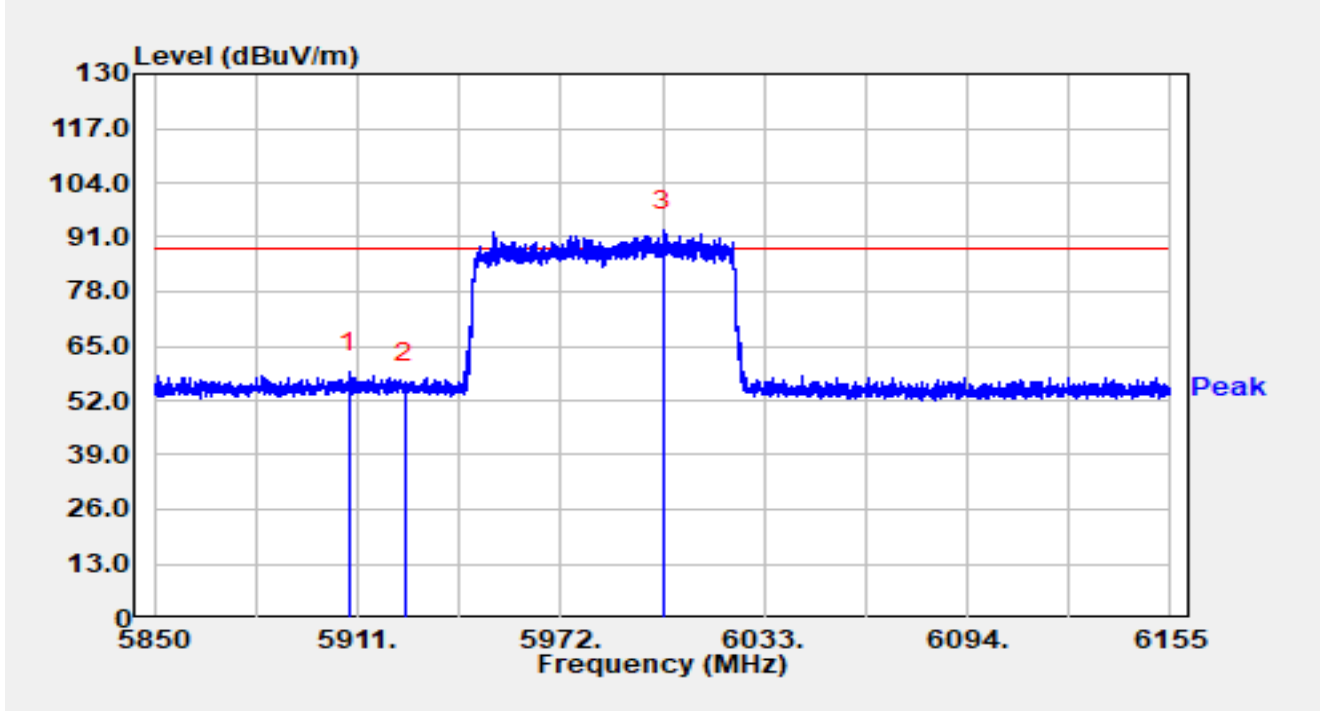


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5908.560        | 37.66          | 21.04      | 58.70                | -29.50      | 88.20          | Peak     |
| 2  |      | 5925.000        | 34.92          | 21.12      | 56.04                | -32.16      | 88.20          | Peak     |
| 3  |      | 6002.652        | 71.56          | 21.05      | 92.62                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE80 at 5985MHz |               |              |

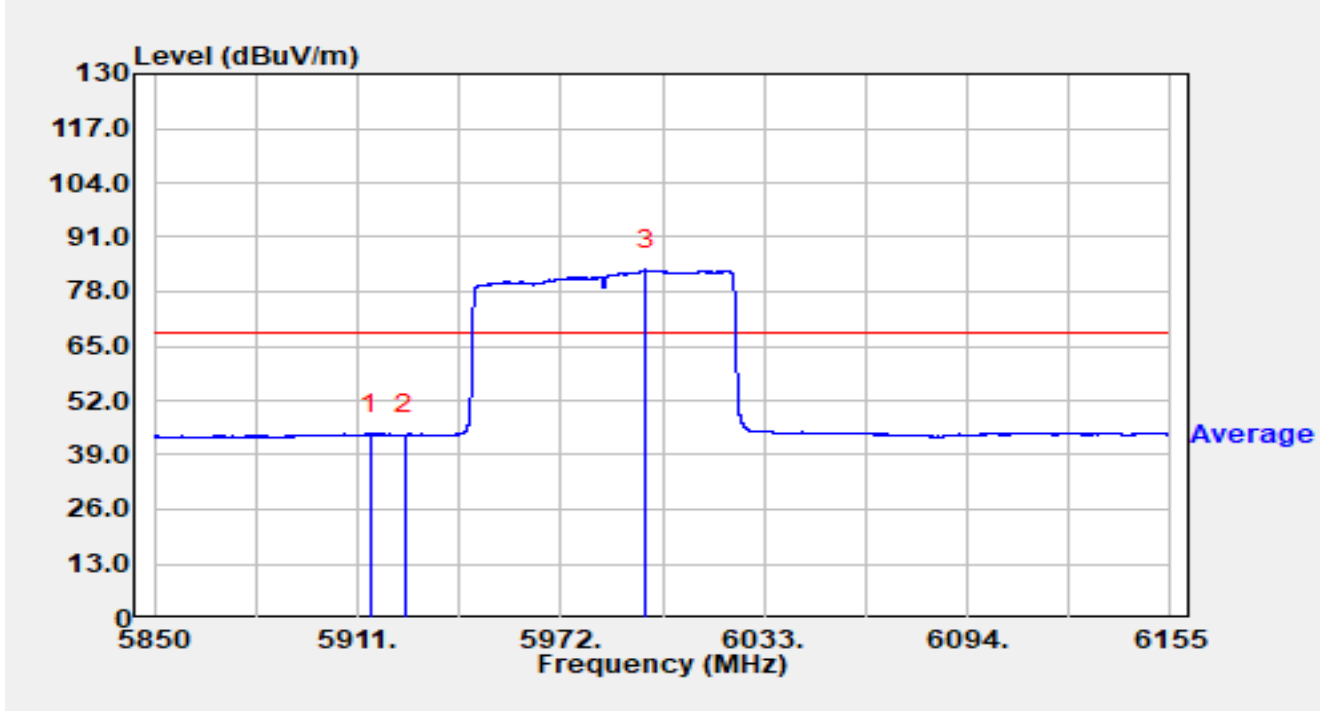


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5914.965        | 22.91          | 21.09      | 44.01                | -24.19      | 68.20          | Average  |
| 2  |      | 5925.000        | 22.66          | 21.12      | 43.78                | -24.42      | 68.20          | Average  |
| 3  |      | 5997.346        | 62.24          | 20.99      | 83.23                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE80 at 5985MHz |               |              |

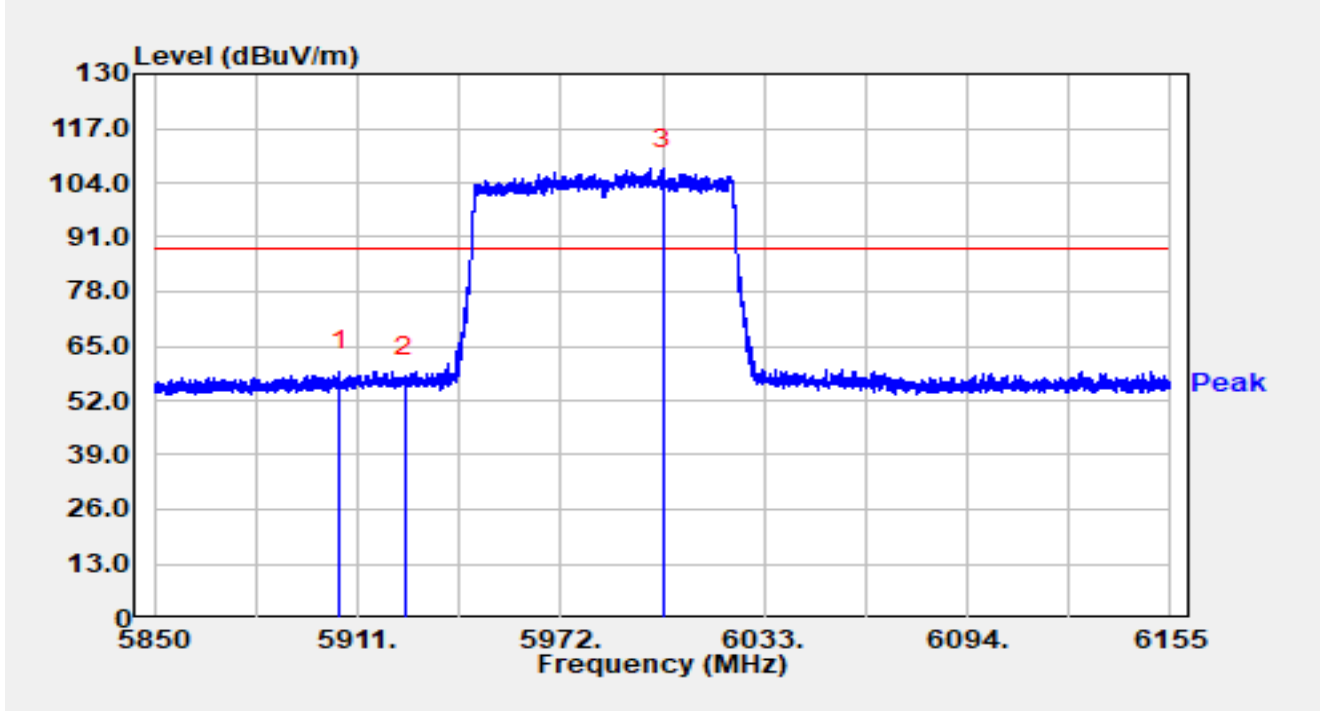


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5905.571        | 37.97          | 21.02      | 58.99                | -29.21      | 88.20          | Peak     |
| 2  |      | 5925.000        | 36.74          | 21.12      | 57.86                | -30.34      | 88.20          | Peak     |
| 3  |      | 6002.530        | 86.19          | 21.05      | 107.24               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE80 at 5985MHz |               |              |

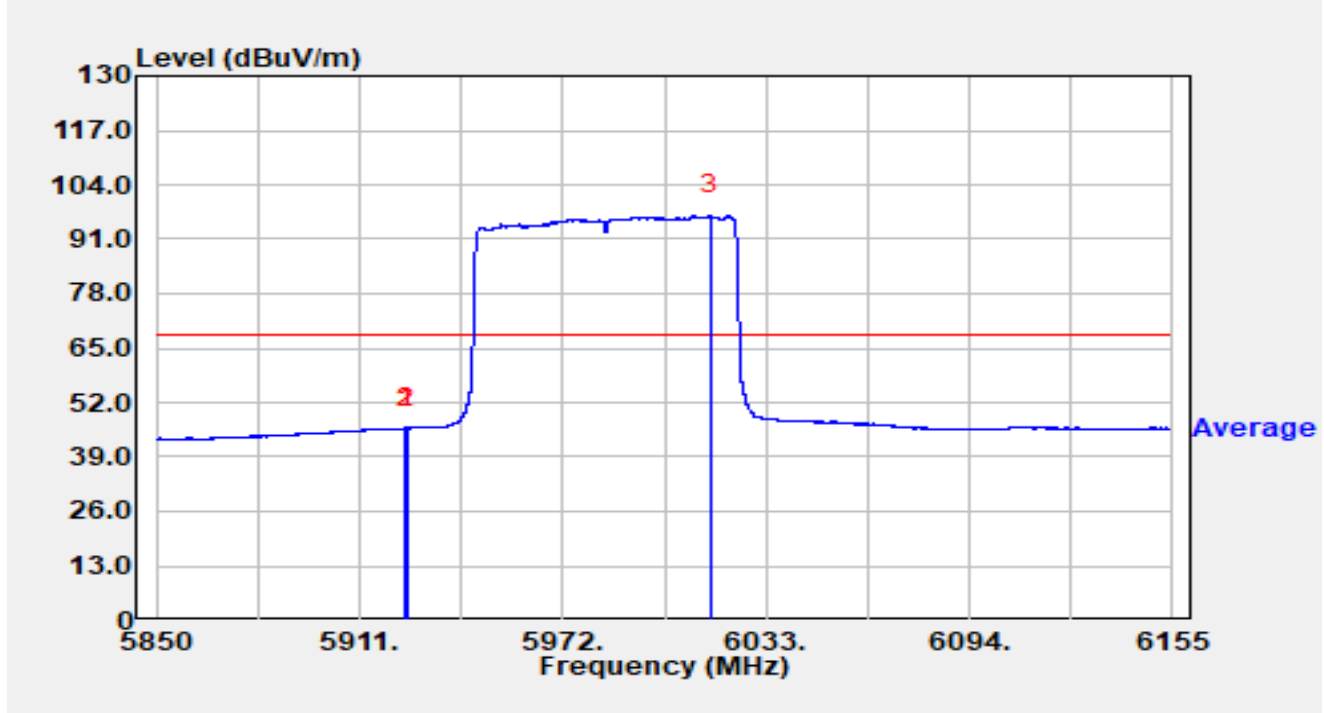


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5924.633        | 24.75          | 21.12      | 45.88                | -22.33      | 68.20          | Average  |
| 2  |      | 5925.000        | 24.75          | 21.12      | 45.87                | -22.33      | 68.20          | Average  |
| 3  |      | 6016.133        | 75.47          | 21.20      | 96.67                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE80 at 7025MHz |               |              |

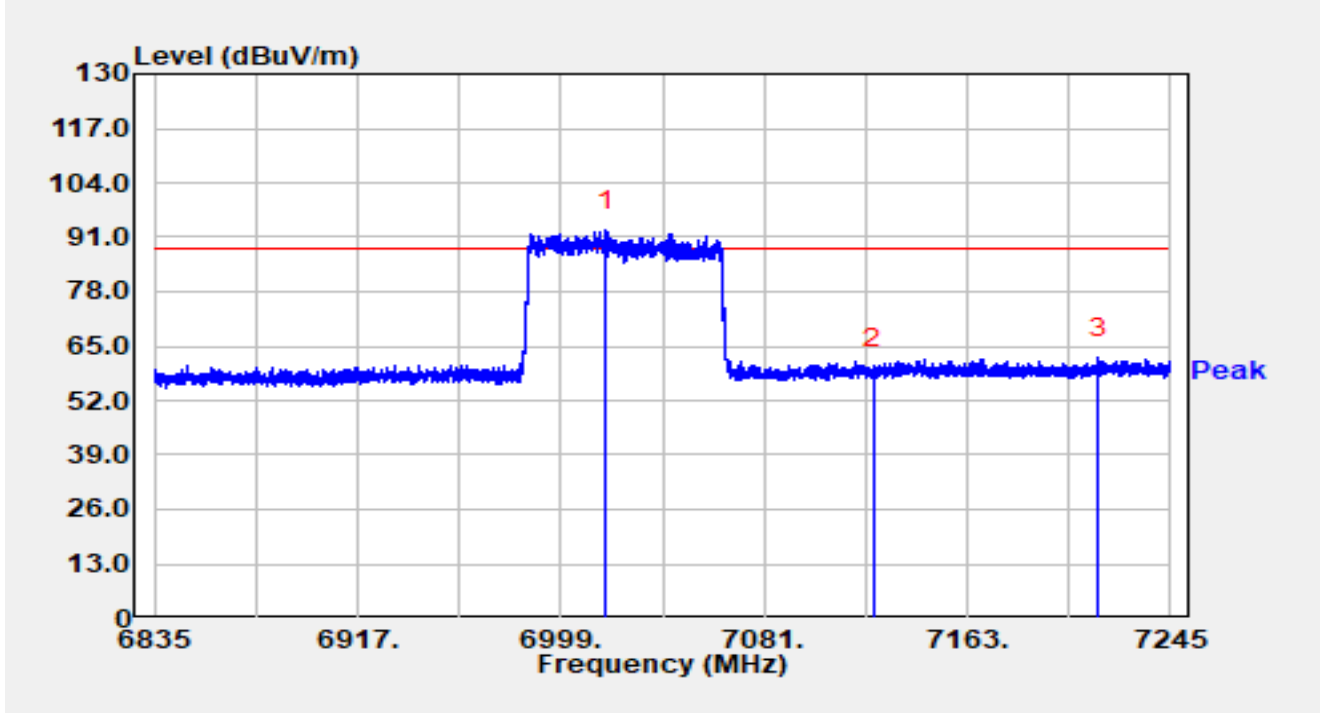


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7017.409        | 68.78          | 23.72      | 92.49                | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 34.95          | 24.48      | 59.43                | -28.77      | 88.20          | Peak     |
| 3  | *    | 7216.095        | 37.47          | 24.68      | 62.16                | -26.04      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE80 at 7025MHz |               |              |

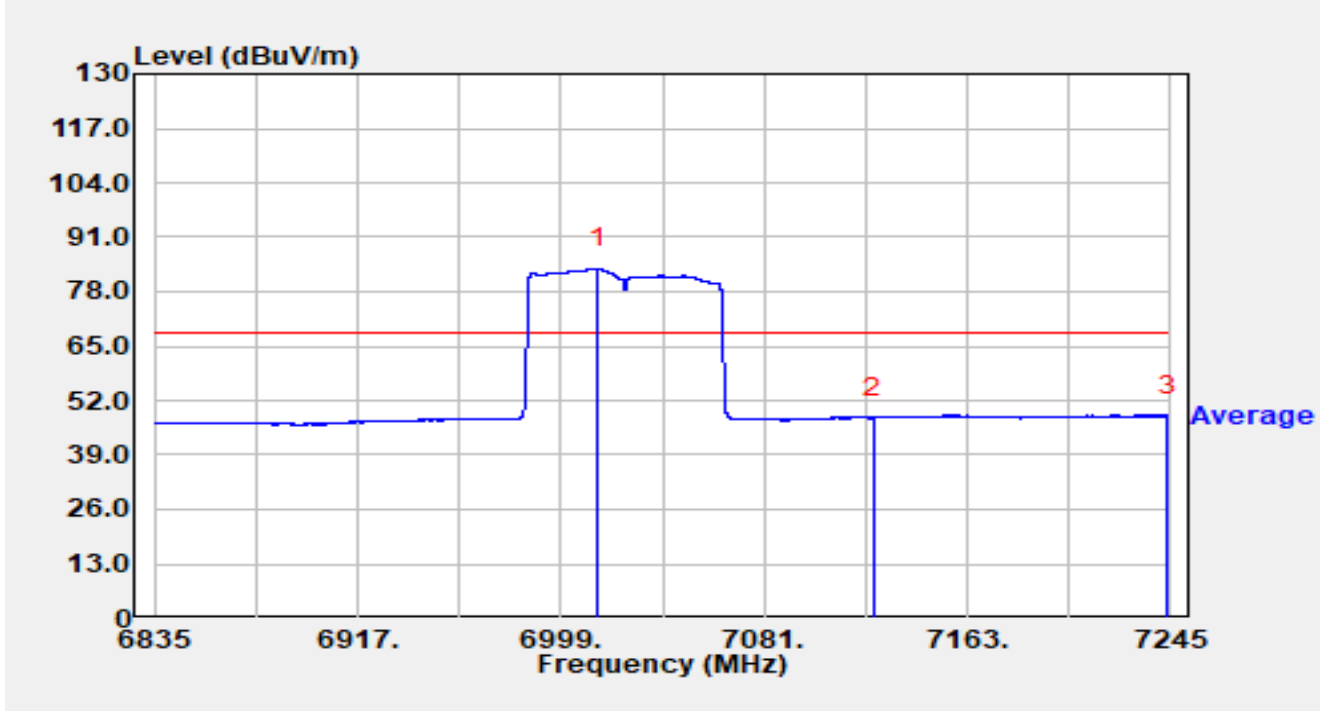


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7013.719        | 59.85          | 23.66      | 83.51                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 23.40          | 24.48      | 47.88                | -20.32      | 68.20          | Average  |
| 3  | *    | 7244.016        | 23.55          | 24.91      | 48.46                | -19.74      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE80 at 7025MHz |               |              |

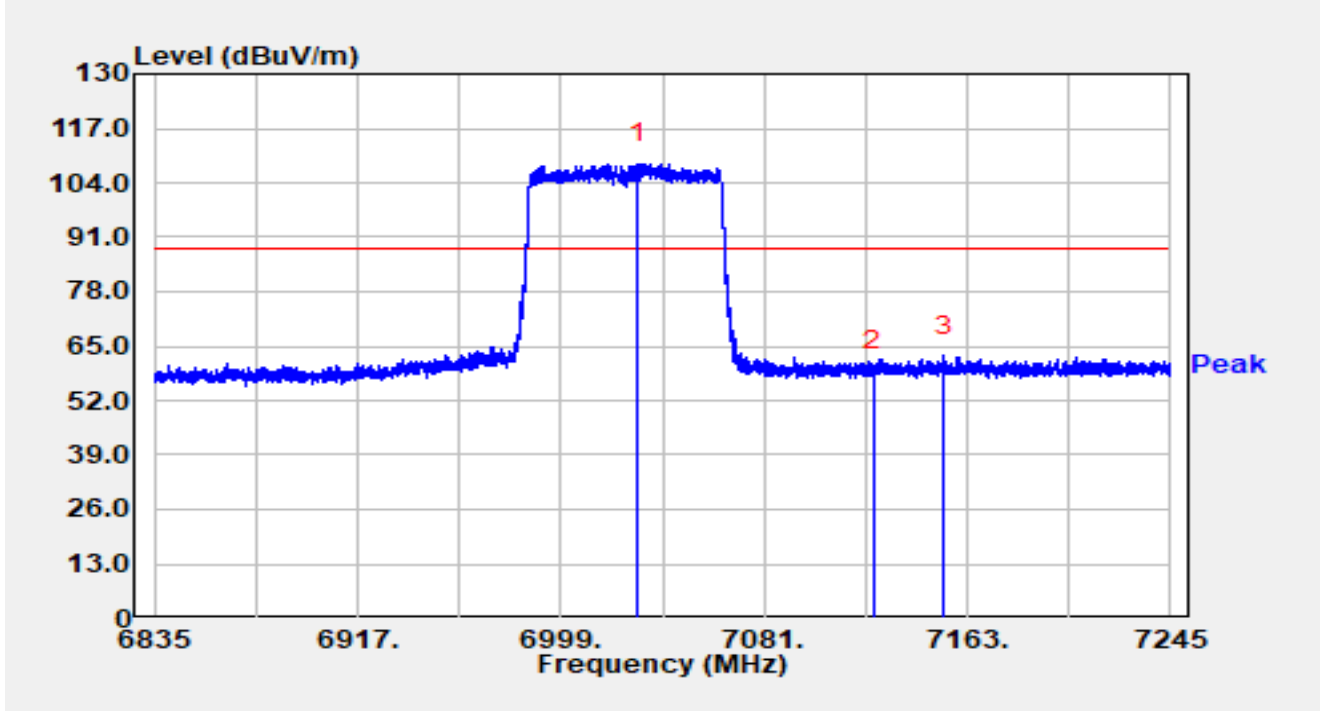


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7030.324        | 84.50          | 24.04      | 108.54               | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 34.39          | 24.48      | 58.87                | -29.33      | 88.20          | Peak     |
| 3  | *    | 7153.775        | 37.76          | 24.80      | 62.56                | -25.64      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                      |               |              |
|-------------|--------------------------------------|---------------|--------------|
| Site        | WZ-AC1                               | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                              | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                    | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                     | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router       | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE80 at 7025MHz |               |              |

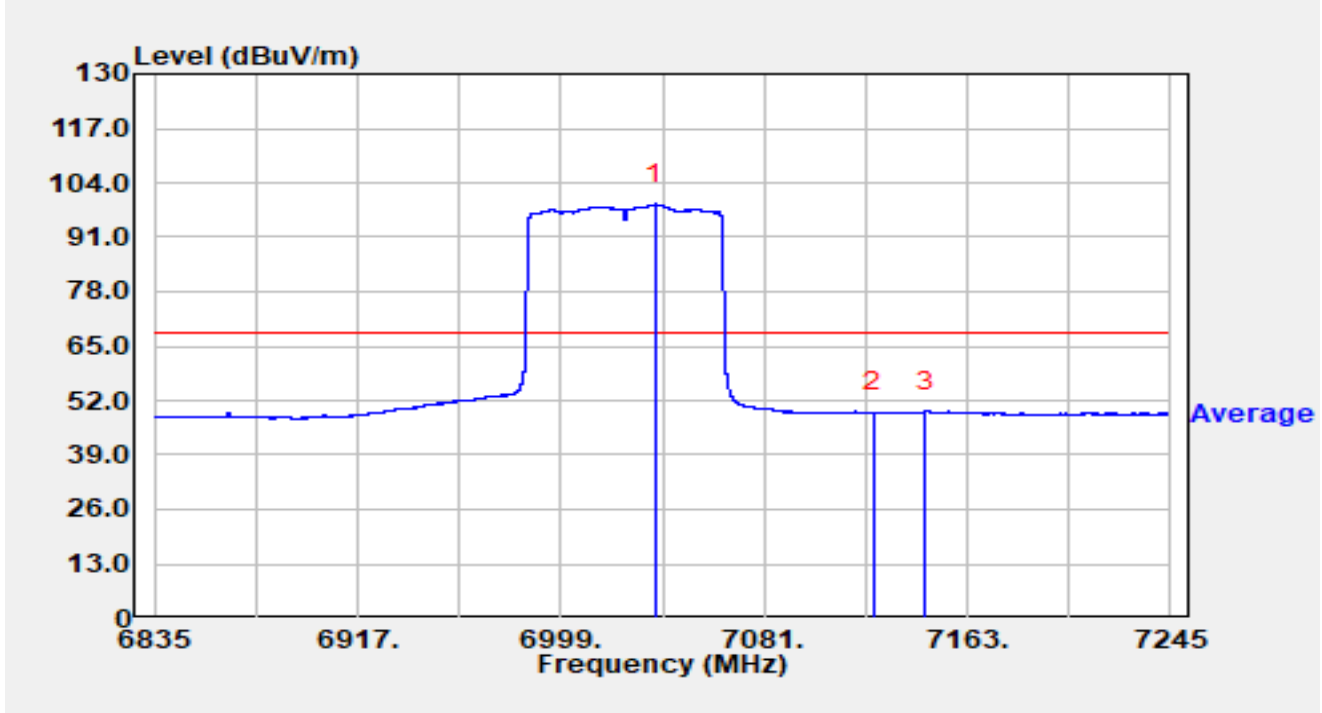


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7037.253        | 74.73          | 24.18      | 98.91                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 24.67          | 24.48      | 49.15                | -19.05      | 68.20          | Average  |
| 3  | *    | 7146.190        | 24.70          | 24.74      | 49.44                | -18.76      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6025MHz |               |              |

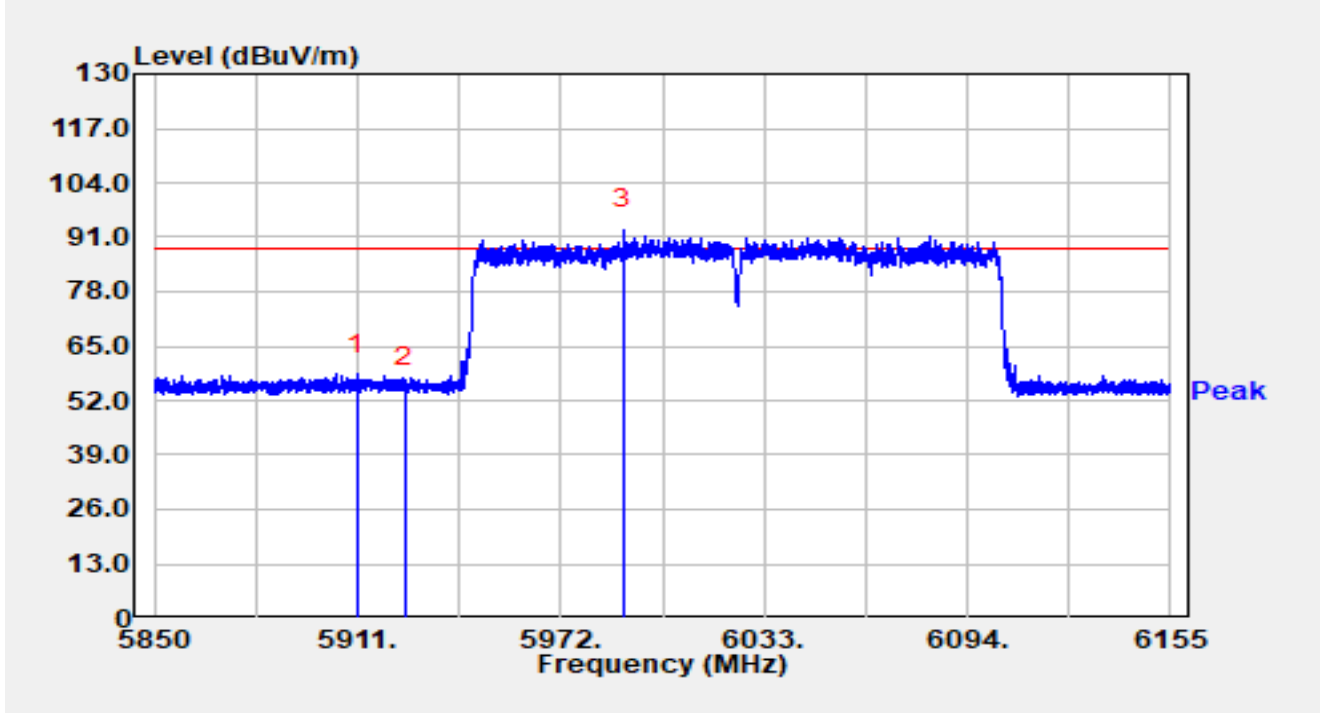


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5910.695        | 37.26          | 21.07      | 58.33                | -29.87      | 88.20          | Peak     |
| 2  |      | 5925.000        | 33.90          | 21.12      | 55.02                | -33.18      | 88.20          | Peak     |
| 3  |      | 5990.696        | 71.89          | 20.97      | 92.86                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6025MHz |               |              |

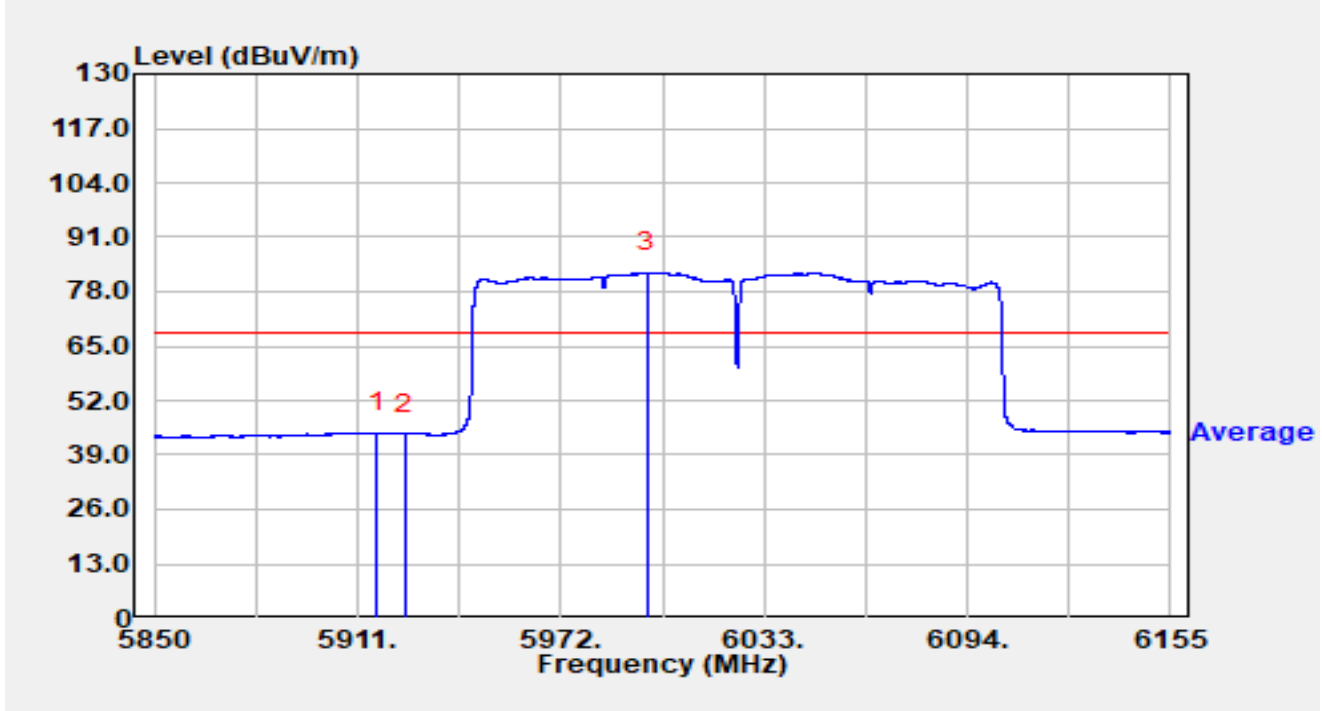


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5916.856        | 23.18          | 21.10      | 44.28                | -23.92      | 68.20          | Average  |
| 2  |      | 5925.000        | 22.89          | 21.12      | 44.01                | -24.19      | 68.20          | Average  |
| 3  |      | 5997.772        | 61.59          | 21.00      | 82.58                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6025MHz |               |              |

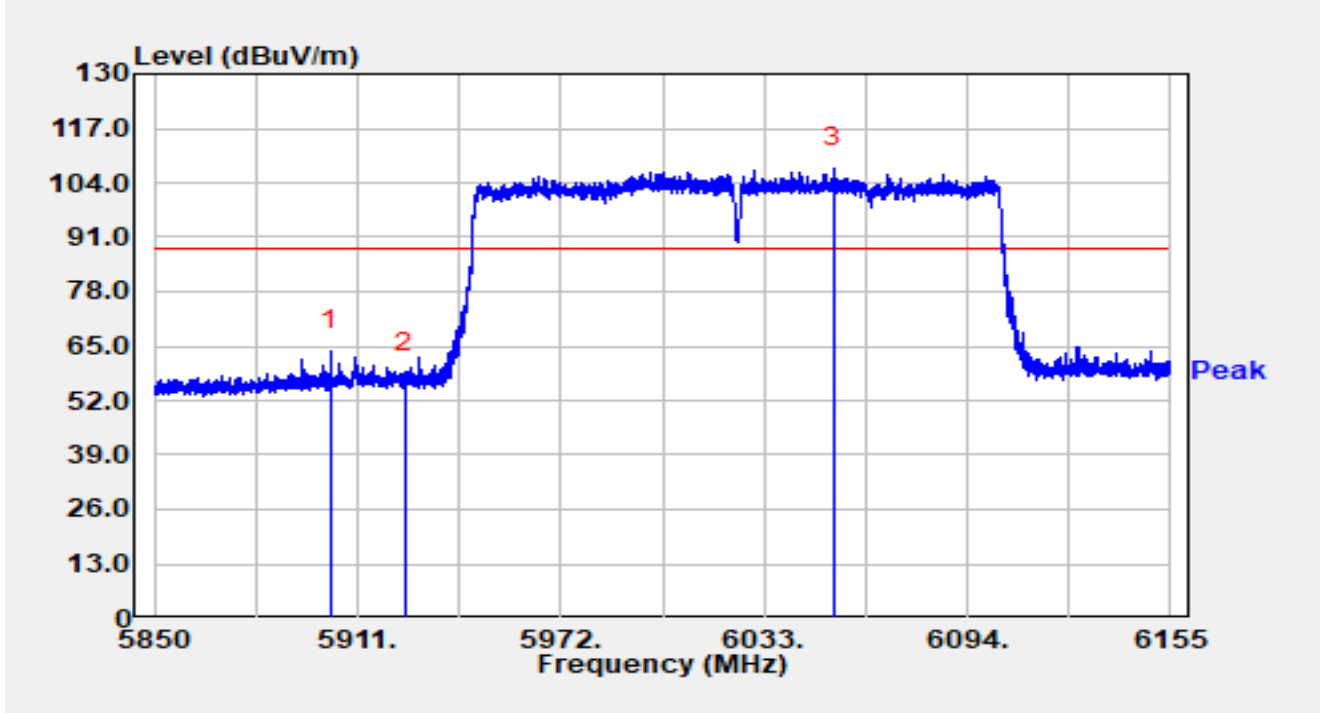


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5902.734        | 42.97          | 20.99      | 63.96                | -24.24      | 88.20          | Peak     |
| 2  |      | 5925.000        | 37.49          | 21.12      | 58.61                | -29.59      | 88.20          | Peak     |
| 3  |      | 6053.801        | 86.45          | 21.00      | 107.45               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6025MHz |               |              |

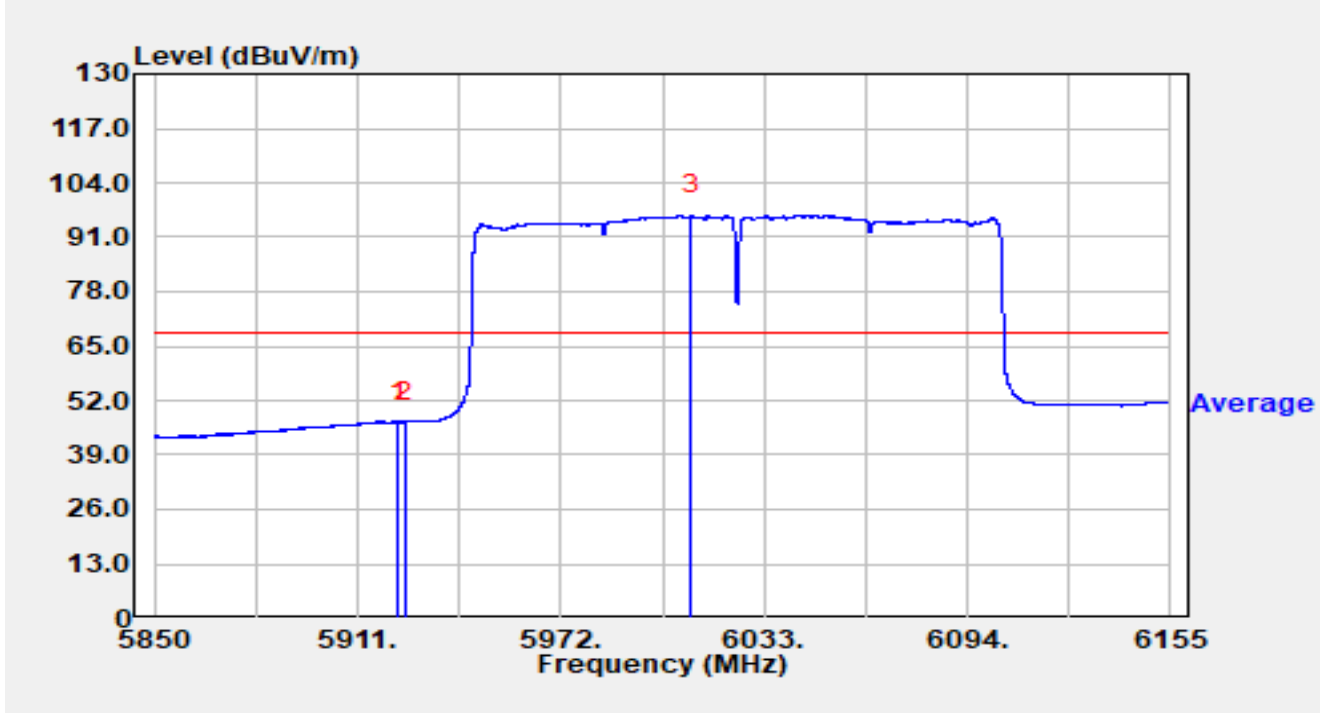


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5923.139        | 25.81          | 21.12      | 46.93                | -21.27      | 68.20          | Average  |
| 2  |      | 5925.000        | 25.72          | 21.12      | 46.84                | -21.36      | 68.20          | Average  |
| 3  |      | 6011.070        | 75.10          | 21.15      | 96.24                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6985MHz |               |              |

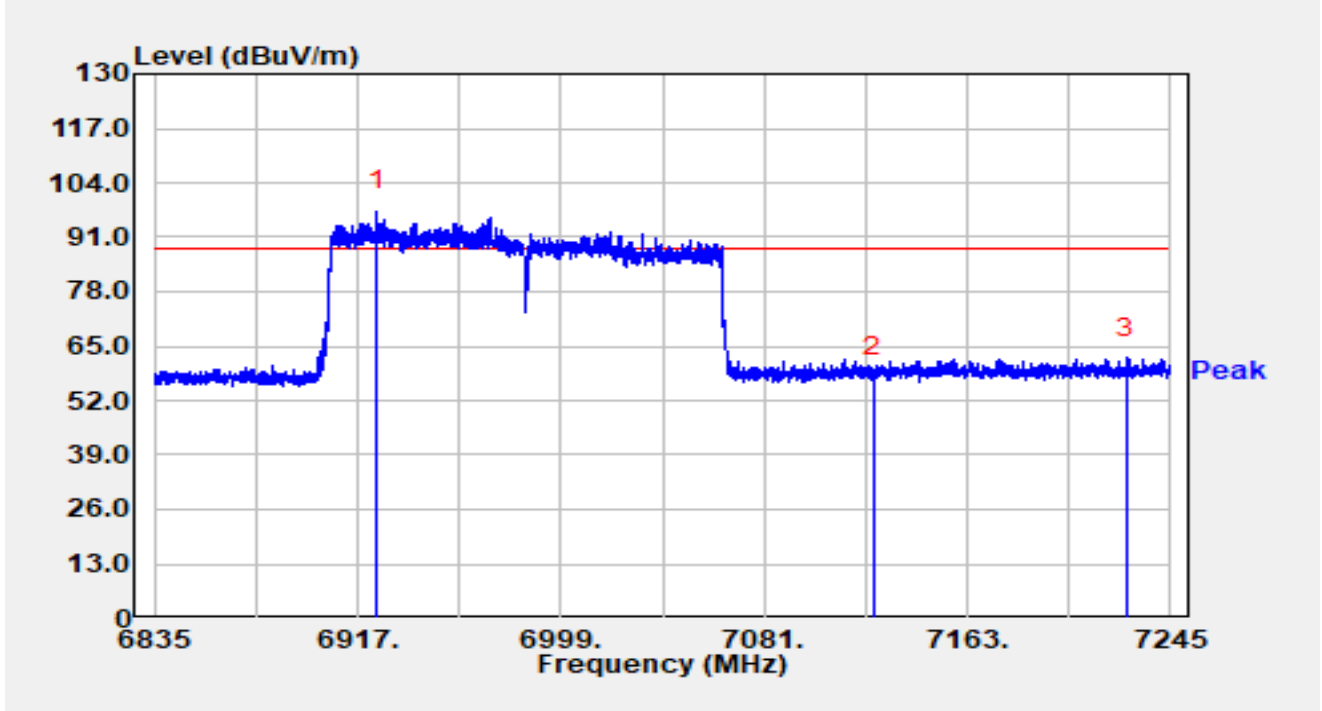


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6924.626        | 73.88          | 23.47      | 97.35                | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 32.94          | 24.48      | 57.43                | -30.77      | 88.20          | Peak     |
| 3  | *    | 7227.124        | 37.49          | 24.75      | 62.24                | -25.96      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6985MHz |               |              |

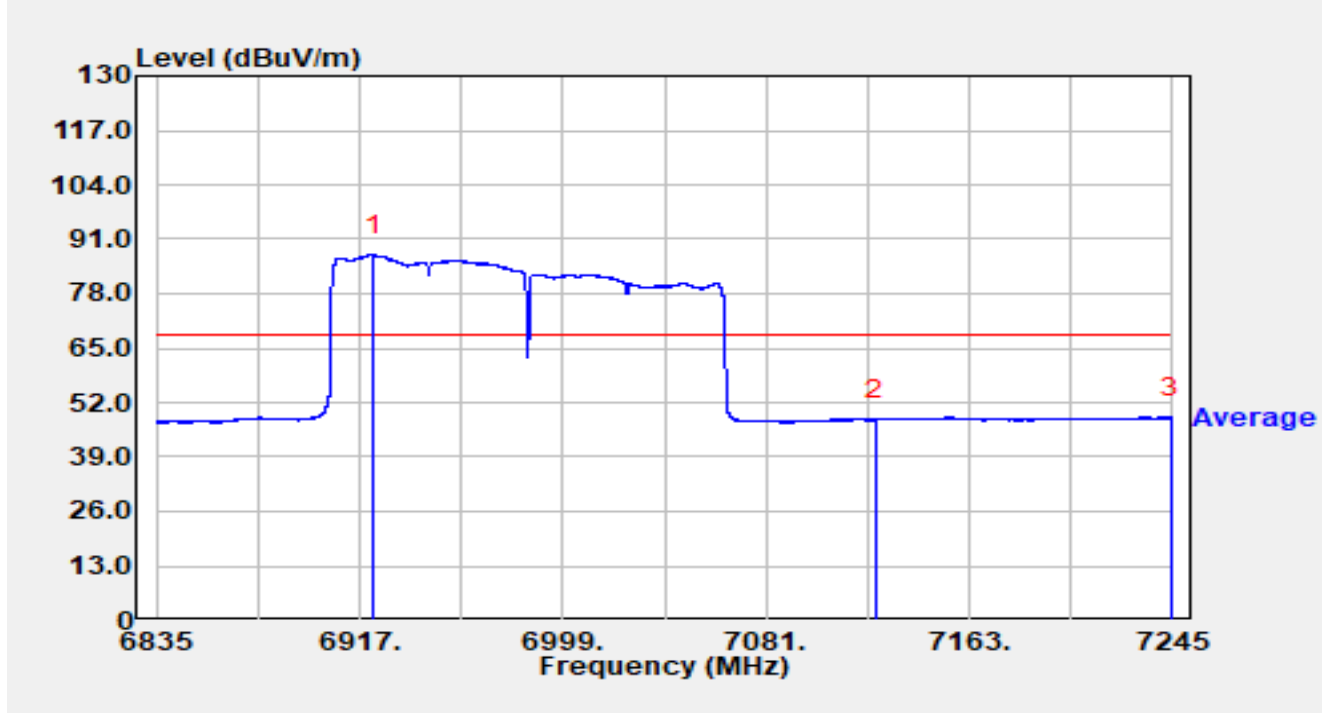


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6922.453        | 63.87          | 23.44      | 87.32                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 23.37          | 24.48      | 47.86                | -20.34      | 68.20          | Average  |
| 3  | *    | 7244.385        | 23.55          | 24.91      | 48.46                | -19.74      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6985MHz |               |              |

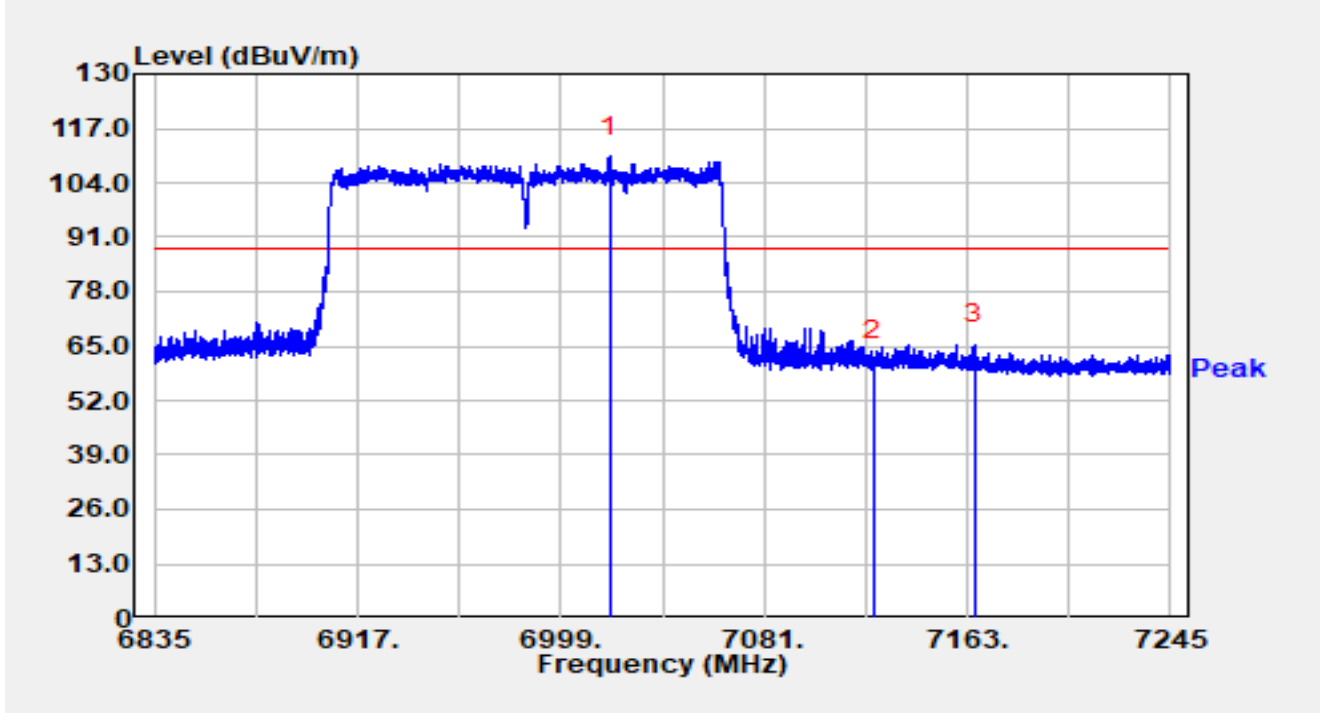


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7018.598        | 86.60          | 23.74      | 110.34               | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 37.14          | 24.48      | 61.62                | -26.58      | 88.20          | Peak     |
| 3  | *    | 7165.706        | 40.66          | 24.65      | 65.31                | -22.89      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11ax-HE160 at 6985MHz |               |              |

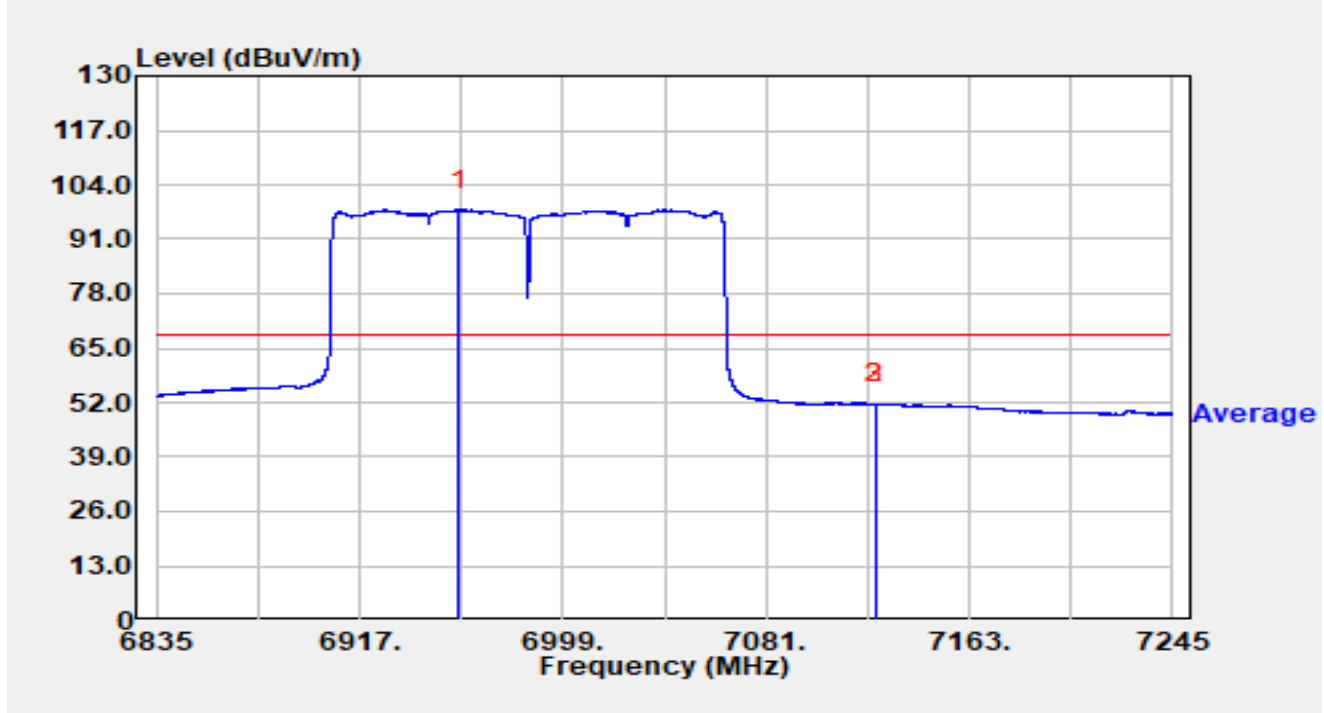


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6957.221        | 74.44          | 23.67      | 98.11                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 27.18          | 24.48      | 51.66                | -16.54      | 68.20          | Average  |
| 3  | *    | 7125.321        | 27.24          | 24.48      | 51.73                | -16.47      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 5955MHz |               |              |

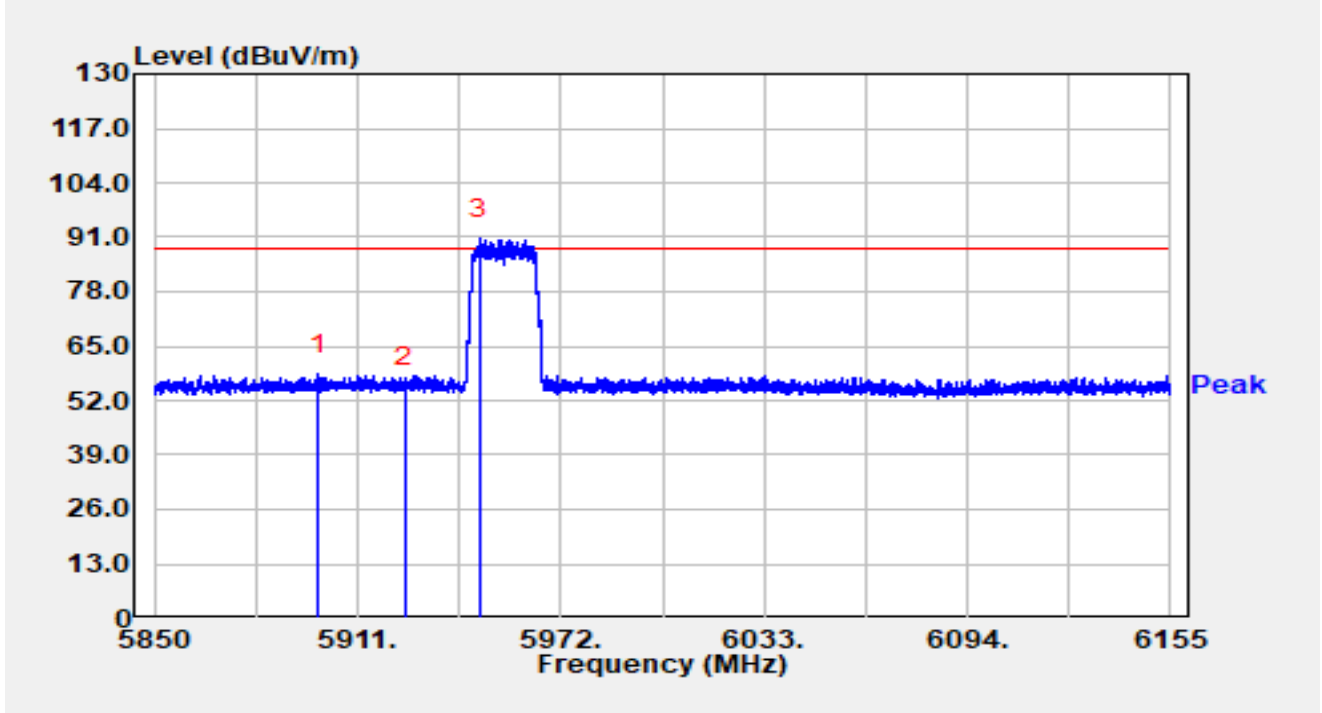


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5899.105        | 37.30          | 20.96      | 58.26                | -29.94      | 88.20          | Peak     |
| 2  |      | 5925.000        | 33.96          | 21.12      | 55.08                | -33.12      | 88.20          | Peak     |
| 3  |      | 5947.478        | 69.66          | 20.86      | 90.53                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 5955MHz |               |              |

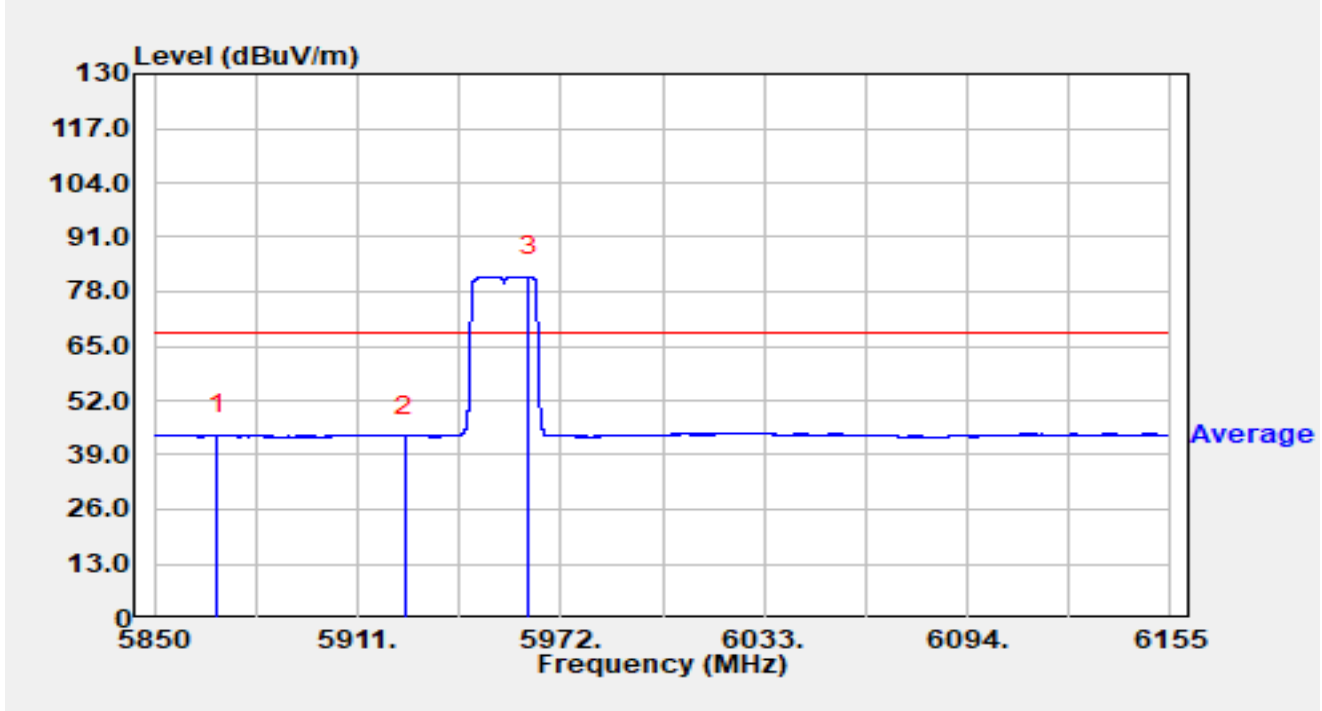


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5868.849        | 23.02          | 20.78      | 43.80                | -24.40      | 68.20          | Average  |
| 2  |      | 5925.000        | 22.50          | 21.12      | 43.62                | -24.58      | 68.20          | Average  |
| 3  |      | 5962.484        | 60.83          | 20.79      | 81.61                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 5955MHz |               |              |

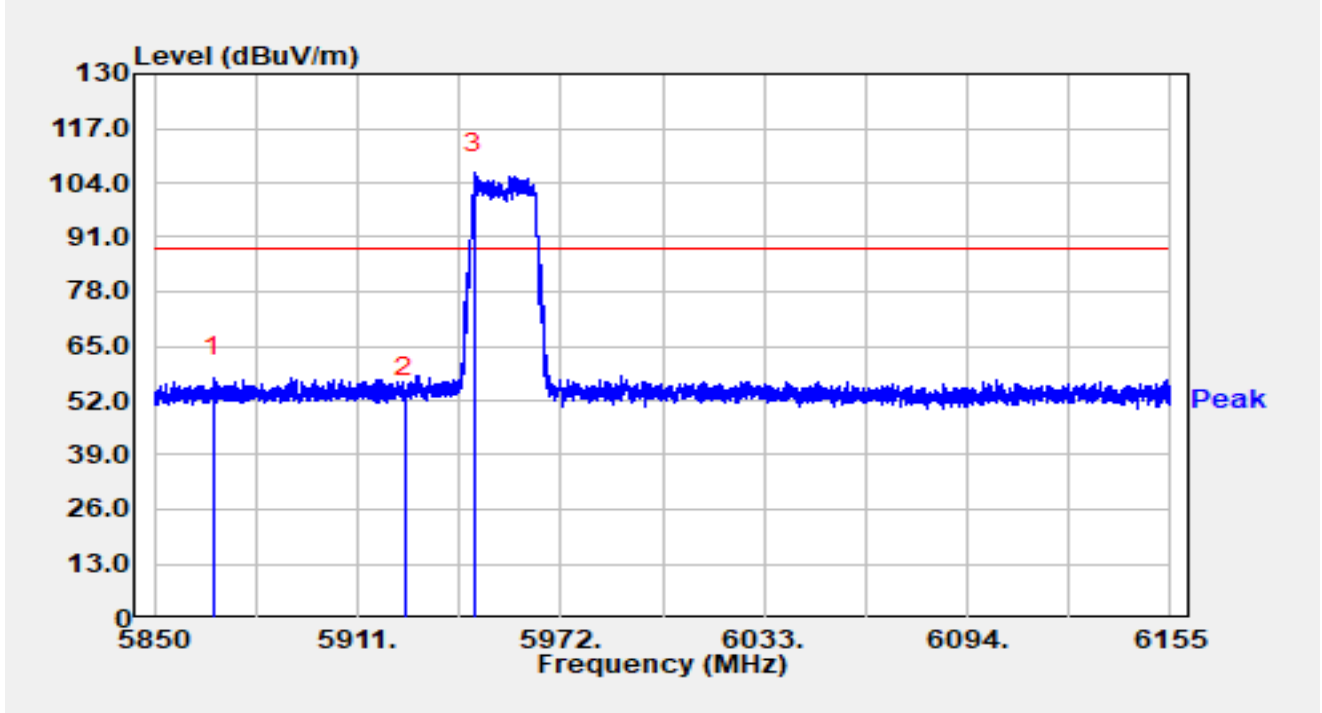


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5867.782        | 36.79          | 20.77      | 57.56                | -30.64      | 88.20          | Peak     |
| 2  |      | 5925.000        | 31.59          | 21.12      | 52.71                | -35.49      | 88.20          | Peak     |
| 3  |      | 5946.105        | 85.36          | 20.87      | 106.23               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 5955MHz |               |              |

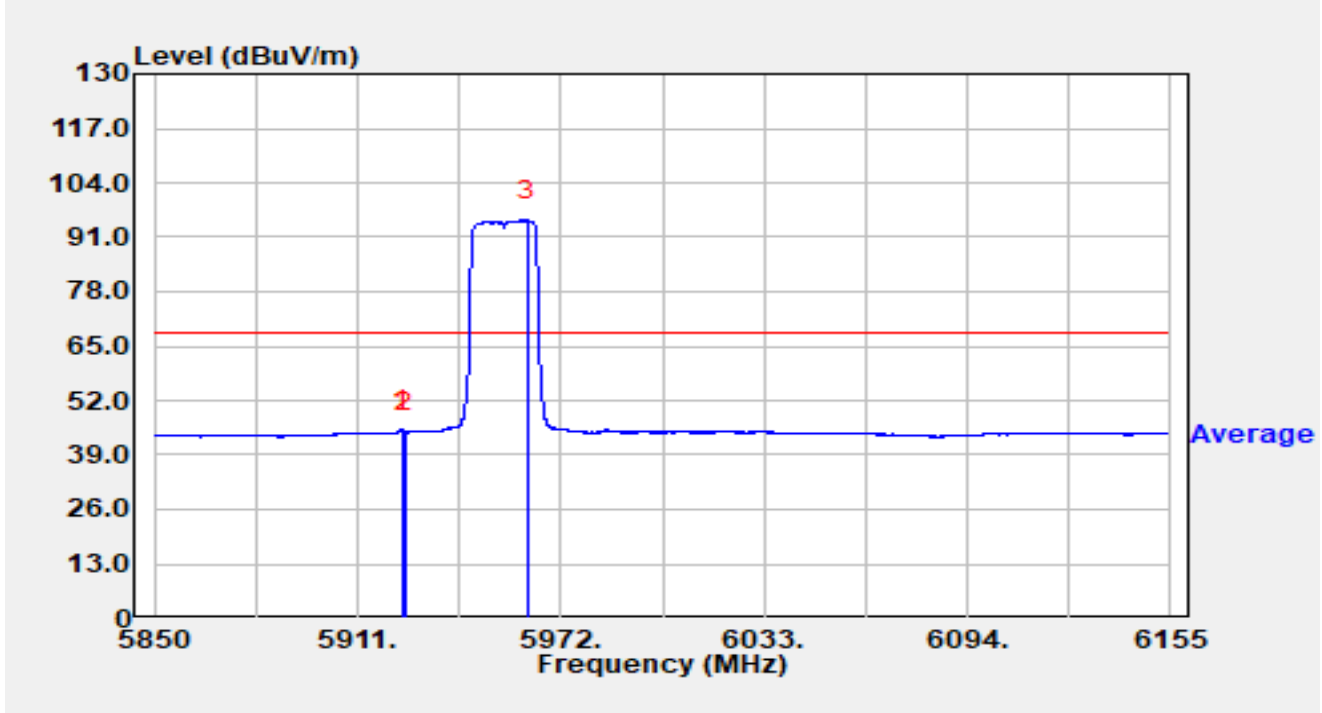


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5924.207        | 23.77          | 21.12      | 44.90                | -23.30      | 68.20          | Average  |
| 2  |      | 5925.000        | 23.32          | 21.12      | 44.45                | -23.75      | 68.20          | Average  |
| 3  |      | 5961.874        | 74.25          | 20.79      | 95.04                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 7095MHz |               |              |

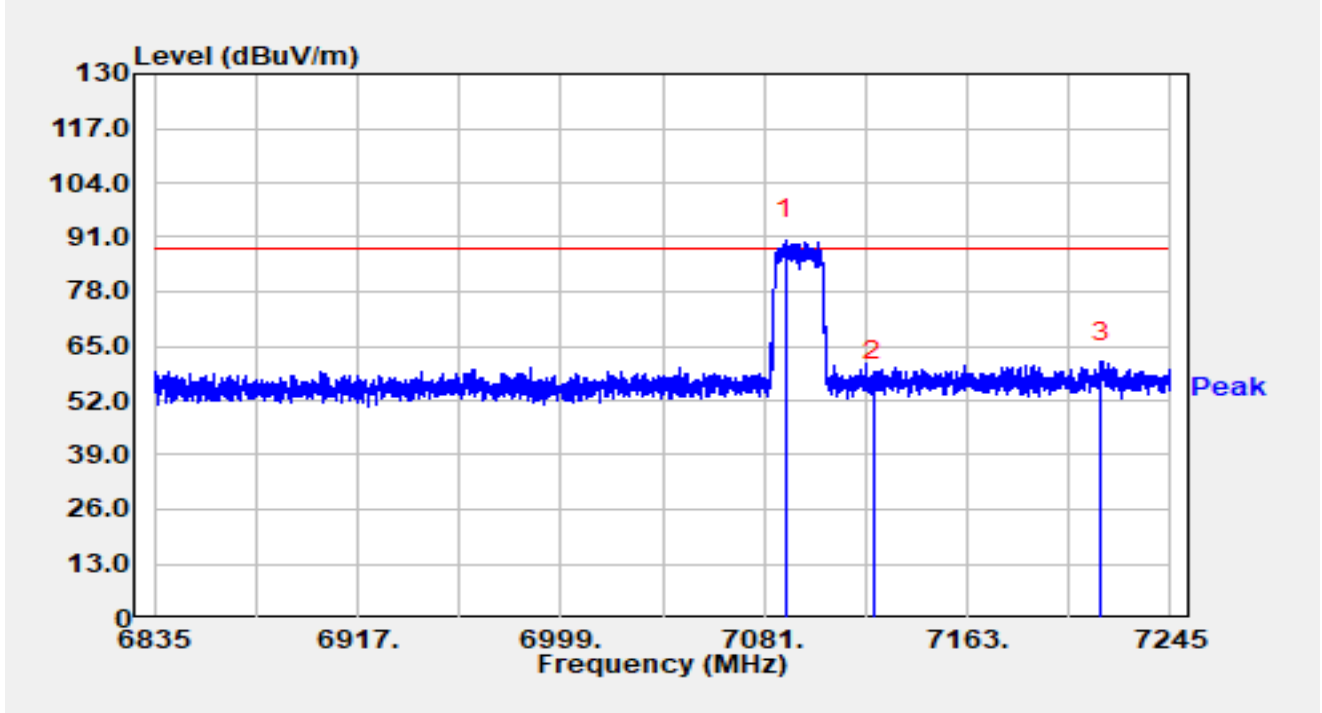


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7089.733        | 66.34          | 24.07      | 90.41                | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 32.01          | 24.48      | 56.49                | -31.71      | 88.20          | Peak     |
| 3  | *    | 7217.202        | 36.47          | 24.70      | 61.16                | -27.04      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 7095MHz |               |              |

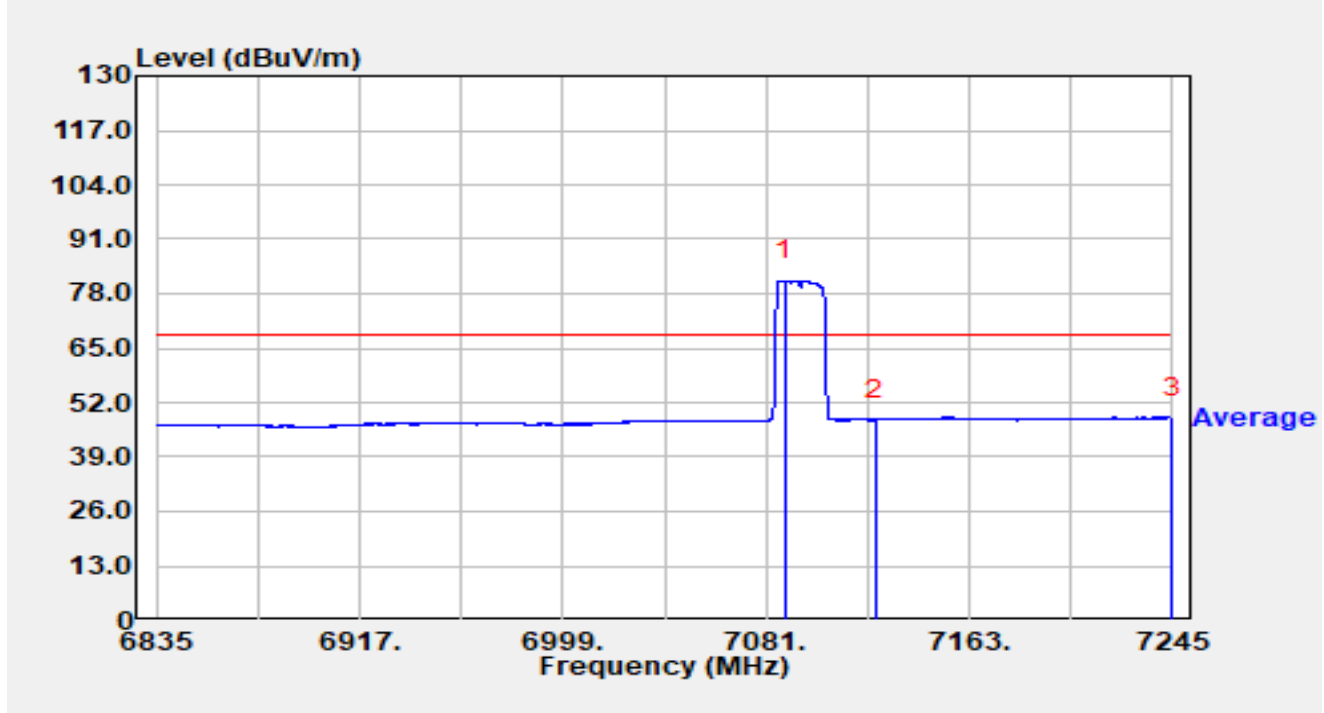


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7088.421        | 56.97          | 24.06      | 81.03                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 23.39          | 24.48      | 47.88                | -20.32      | 68.20          | Average  |
| 3  | *    | 7244.795        | 23.55          | 24.92      | 48.47                | -19.73      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 7095MHz |               |              |

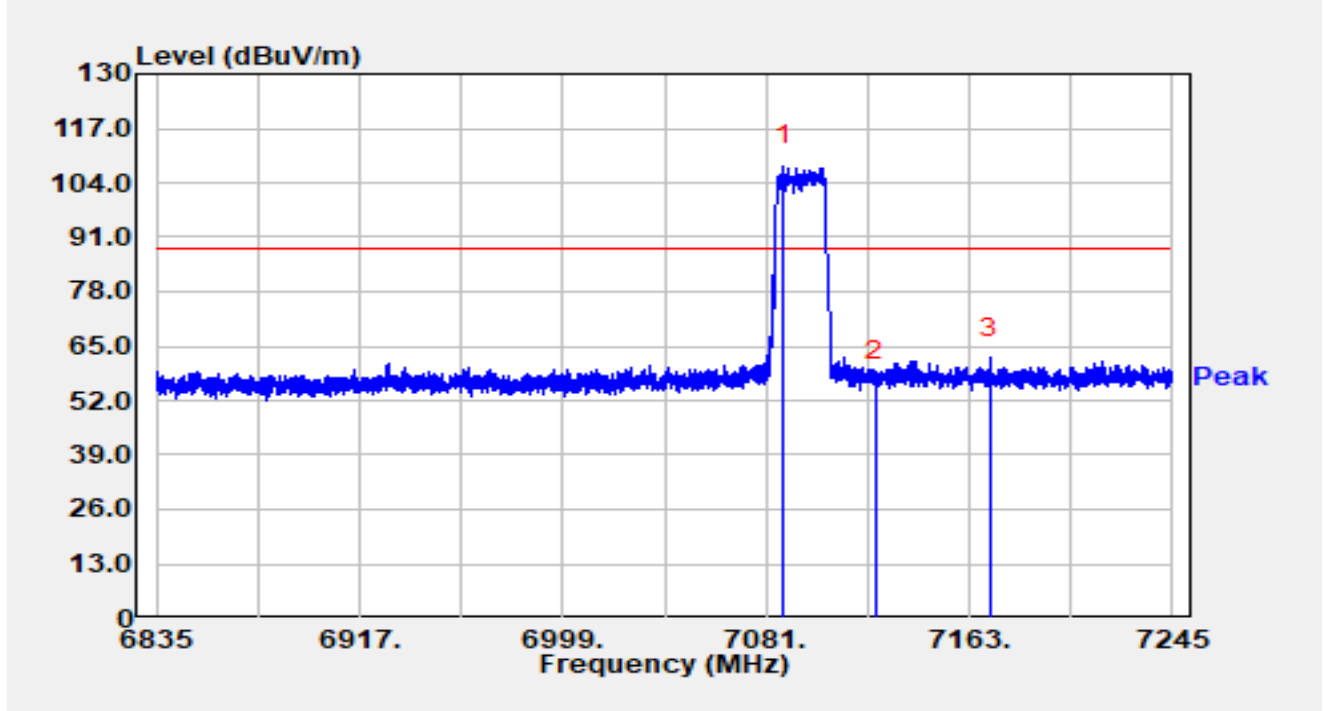


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7088.175        | 84.05          | 24.06      | 108.11               | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 32.32          | 24.48      | 56.81                | -31.39      | 88.20          | Peak     |
| 3  | *    | 7171.528        | 37.69          | 24.56      | 62.25                | -25.95      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 7095MHz |               |              |

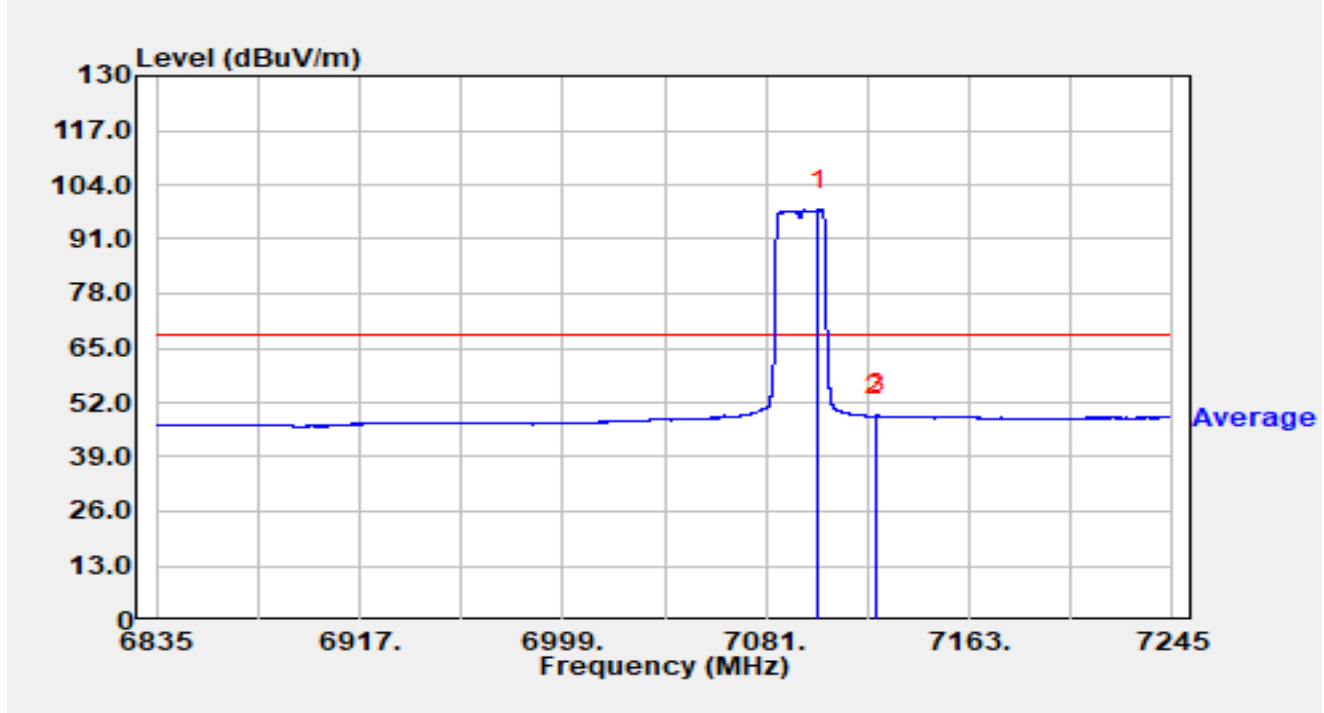


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7102.074        | 73.98          | 24.11      | 98.09                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 24.17          | 24.48      | 48.66                | -19.54      | 68.20          | Average  |
| 3  | *    | 7125.567        | 24.58          | 24.49      | 49.06                | -19.14      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 5965MHz |               |              |

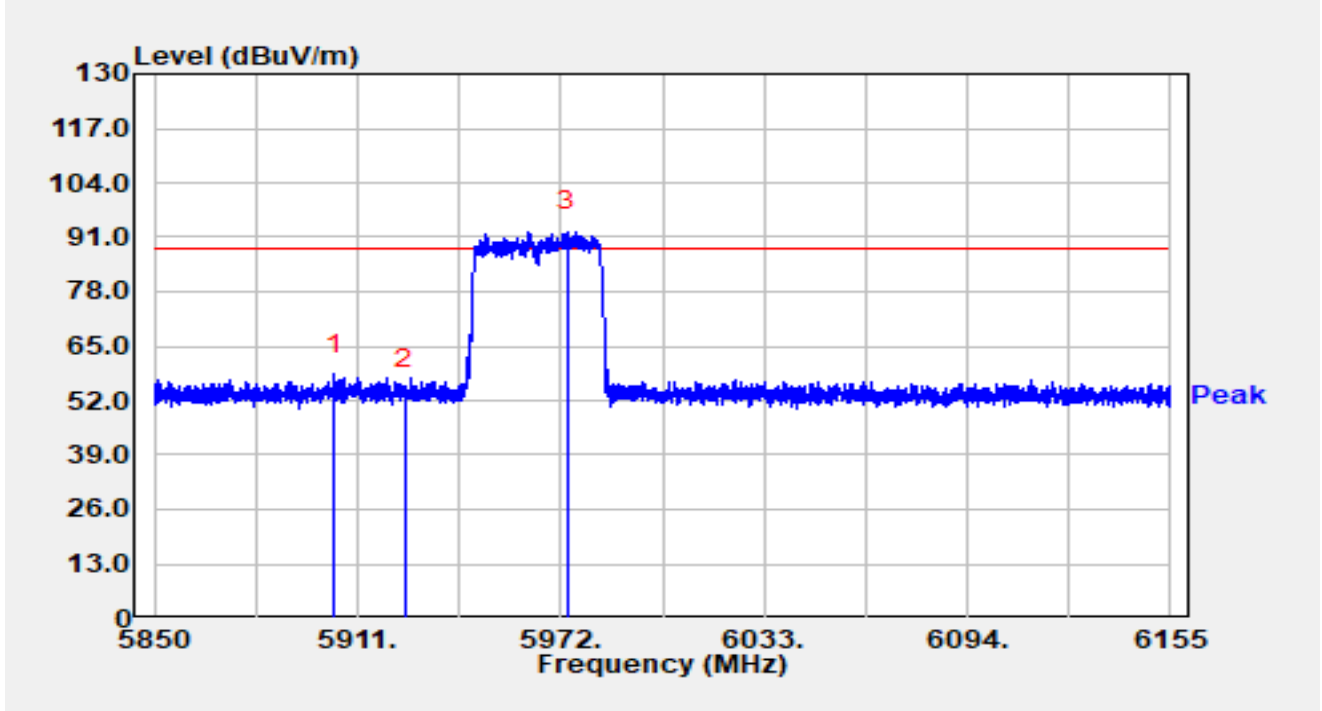


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5903.833        | 37.14          | 21.00      | 58.14                | -30.06      | 88.20          | Peak     |
| 2  |      | 5925.000        | 33.51          | 21.12      | 54.63                | -33.57      | 88.20          | Peak     |
| 3  |      | 5974.013        | 71.43          | 20.90      | 92.33                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 5965MHz |               |              |

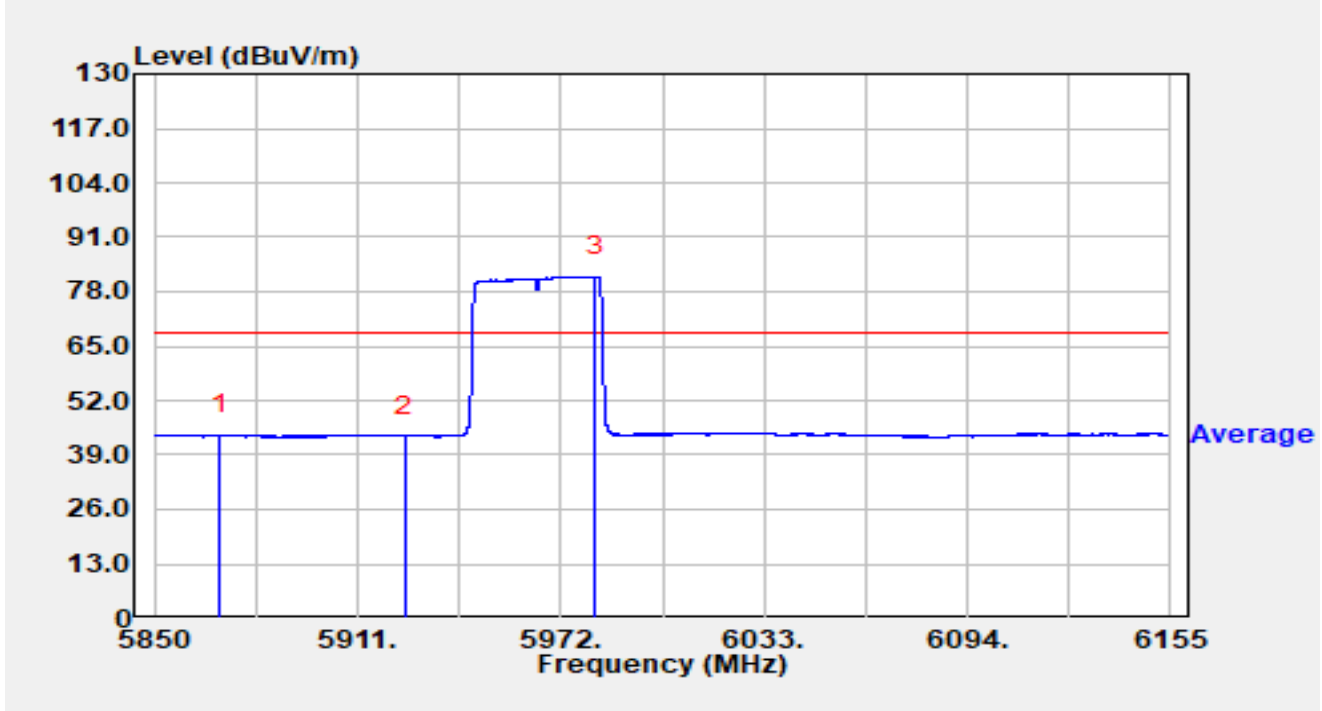


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5869.581        | 23.11          | 20.78      | 43.89                | -24.31      | 68.20          | Average  |
| 2  |      | 5925.000        | 22.54          | 21.12      | 43.66                | -24.54      | 68.20          | Average  |
| 3  |      | 5982.522        | 60.63          | 20.96      | 81.59                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 5965MHz |               |              |

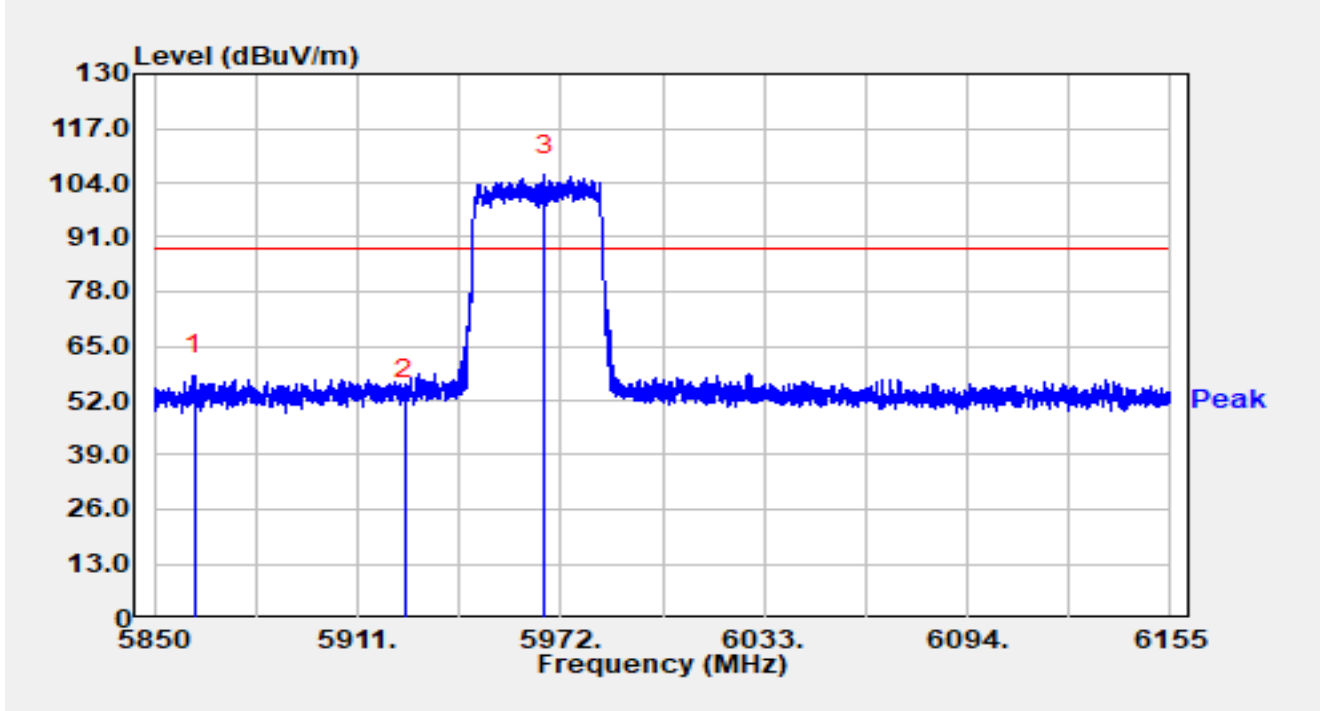


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5861.895        | 37.17          | 20.74      | 57.91                | -30.29      | 88.20          | Peak     |
| 2  |      | 5925.000        | 31.05          | 21.12      | 52.17                | -36.03      | 88.20          | Peak     |
| 3  |      | 5967.028        | 85.09          | 20.82      | 105.91               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 5965MHz |               |              |

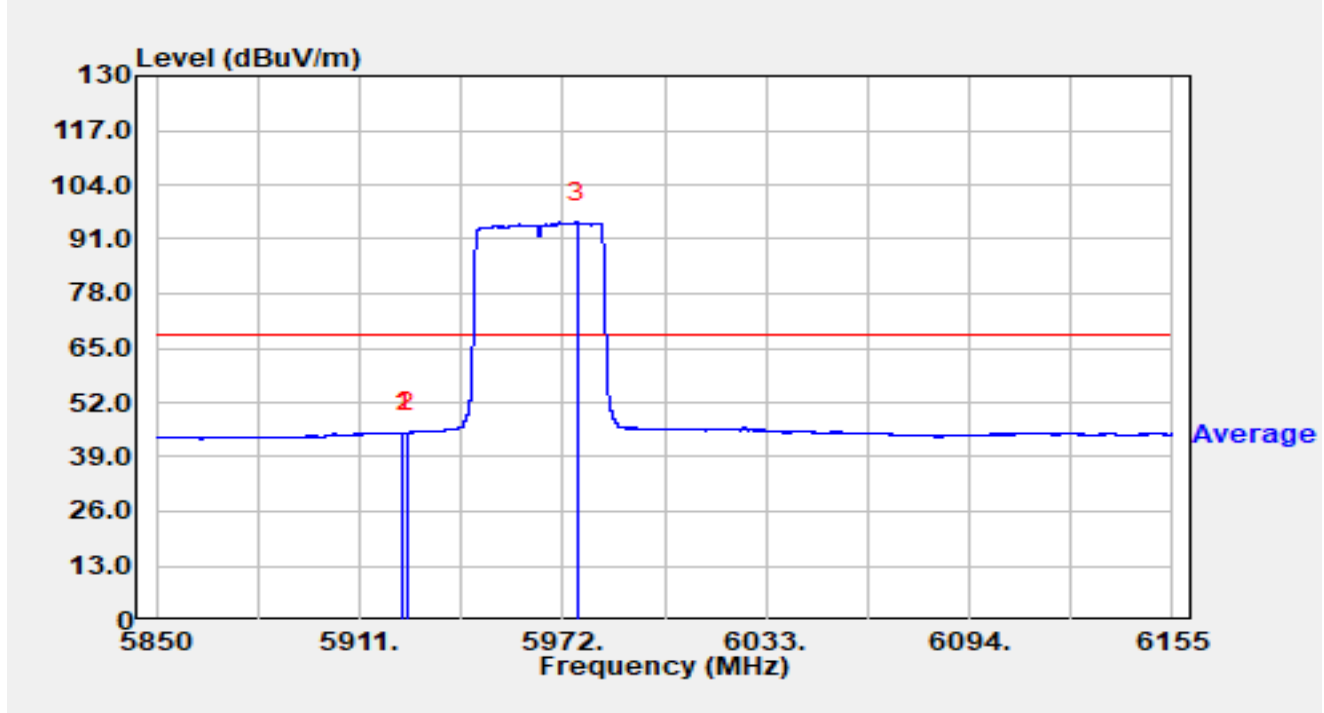


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5924.115        | 23.68          | 21.12      | 44.80                | -23.40      | 68.20          | Average  |
| 2  |      | 5925.000        | 23.66          | 21.12      | 44.78                | -23.42      | 68.20          | Average  |
| 3  |      | 5976.179        | 74.24          | 20.93      | 95.17                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 7085MHz |               |              |

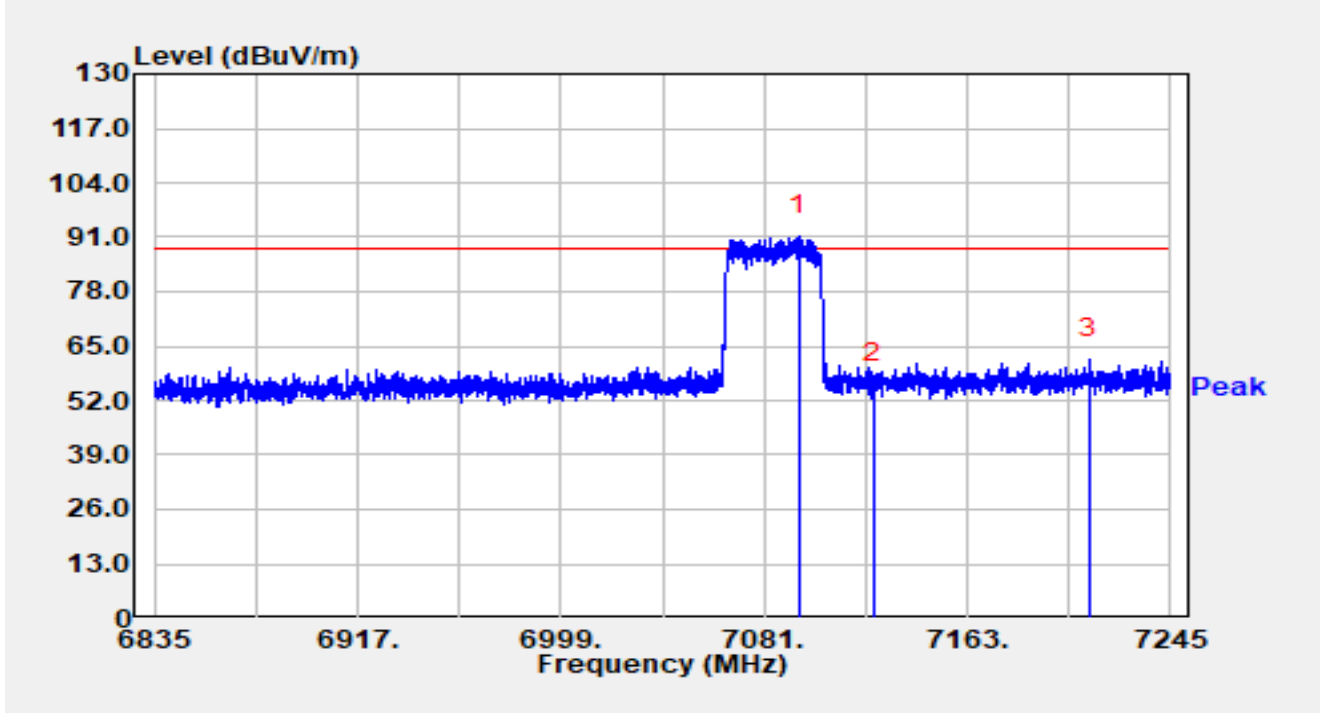


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7094.981        | 67.36          | 24.08      | 91.44                | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 31.73          | 24.48      | 56.22                | -31.98      | 88.20          | Peak     |
| 3  | *    | 7212.364        | 37.21          | 24.64      | 61.85                | -26.35      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 7085MHz |               |              |

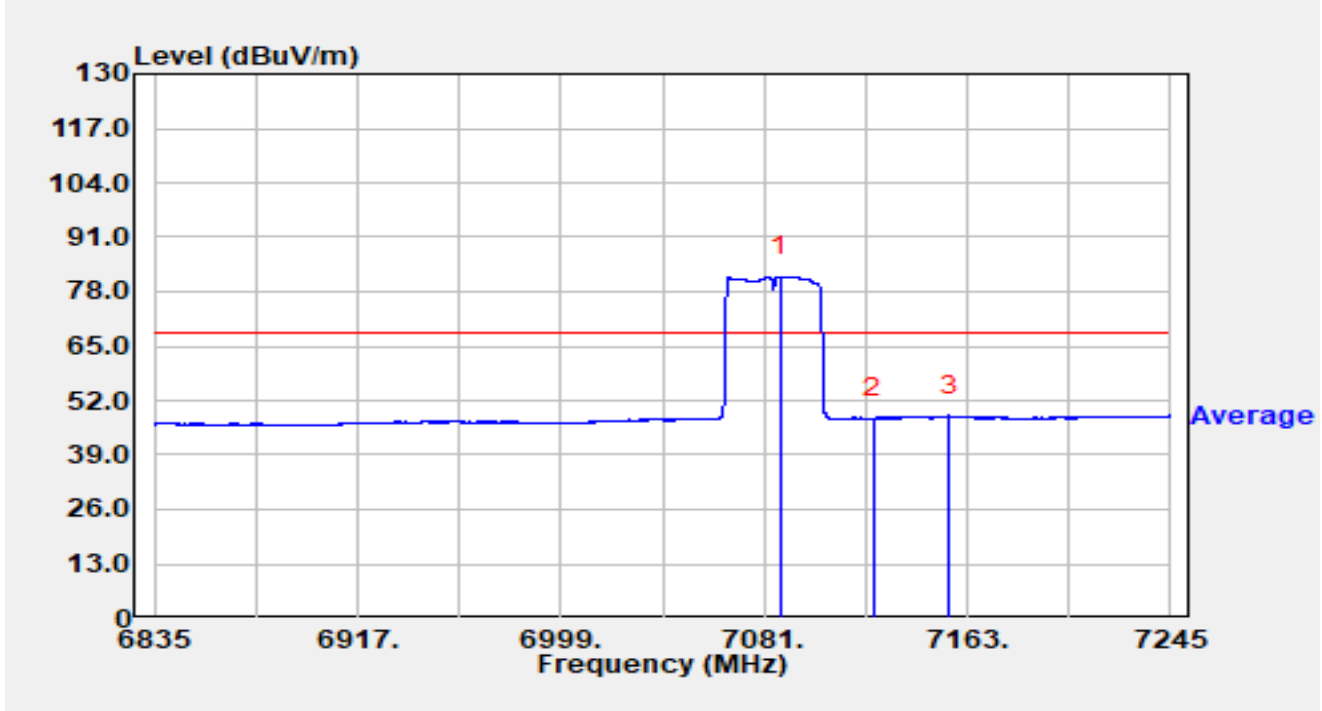


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7087.724        | 57.46          | 24.06      | 81.52                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 23.25          | 24.48      | 47.73                | -20.47      | 68.20          | Average  |
| 3  | *    | 7155.579        | 23.56          | 24.78      | 48.34                | -19.86      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 7085MHz |               |              |

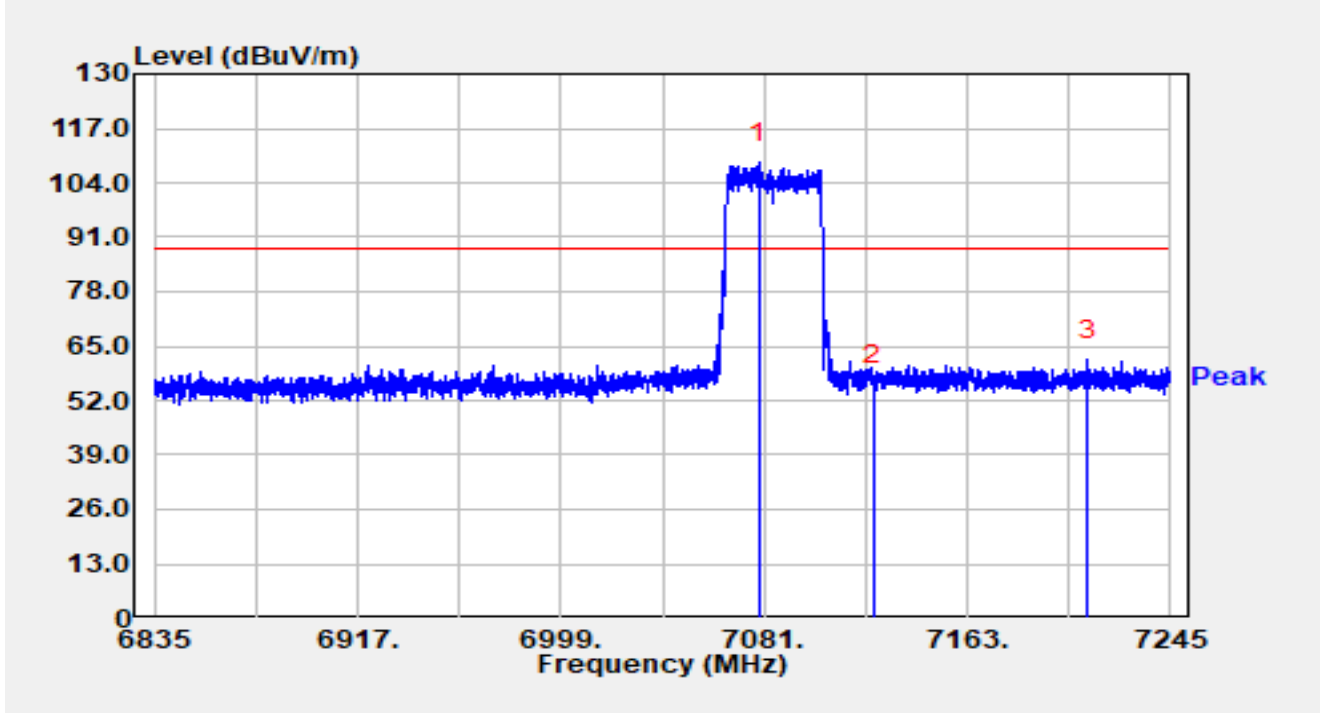


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7078.786        | 84.77          | 24.07      | 108.85               | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 31.00          | 24.48      | 55.48                | -32.72      | 88.20          | Peak     |
| 3  | *    | 7211.421        | 37.18          | 24.63      | 61.81                | -26.39      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 7085MHz |               |              |

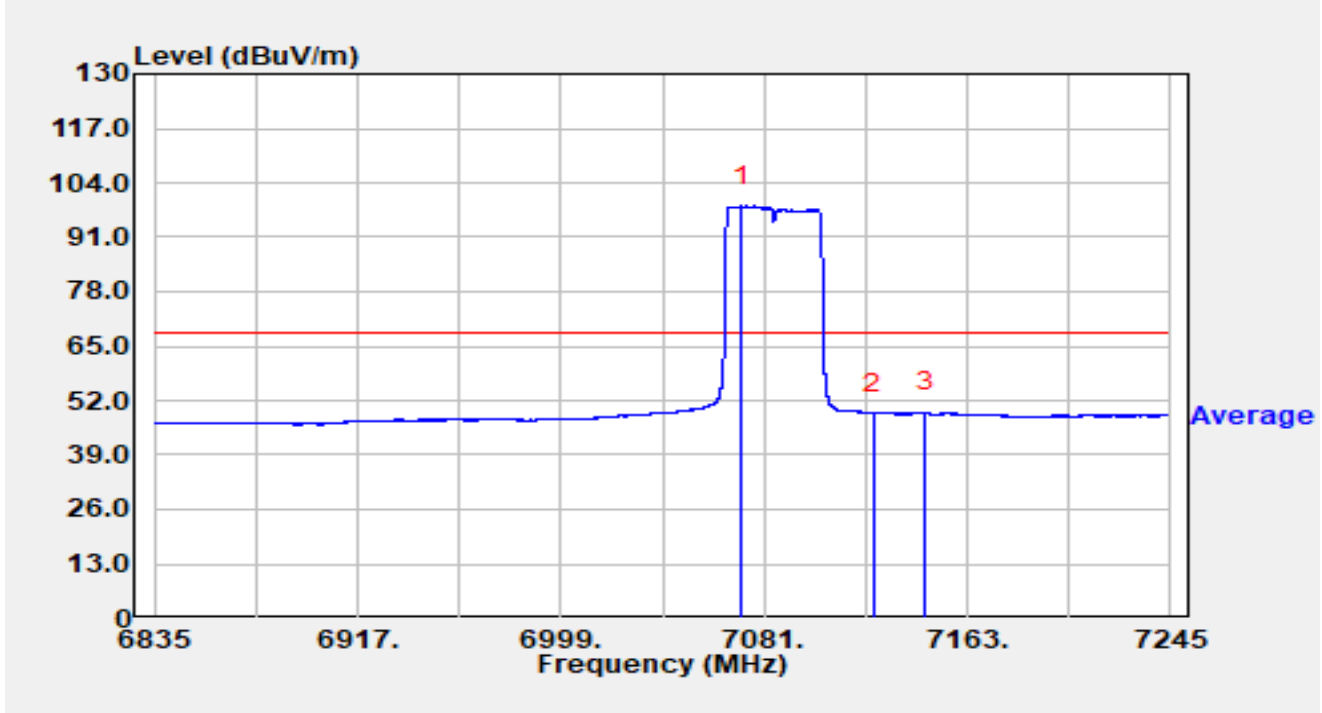


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7071.693        | 74.42          | 24.11      | 98.52                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 24.47          | 24.48      | 48.95                | -19.25      | 68.20          | Average  |
| 3  | *    | 7146.149        | 24.46          | 24.74      | 49.20                | -19.00      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 5985MHz |               |              |

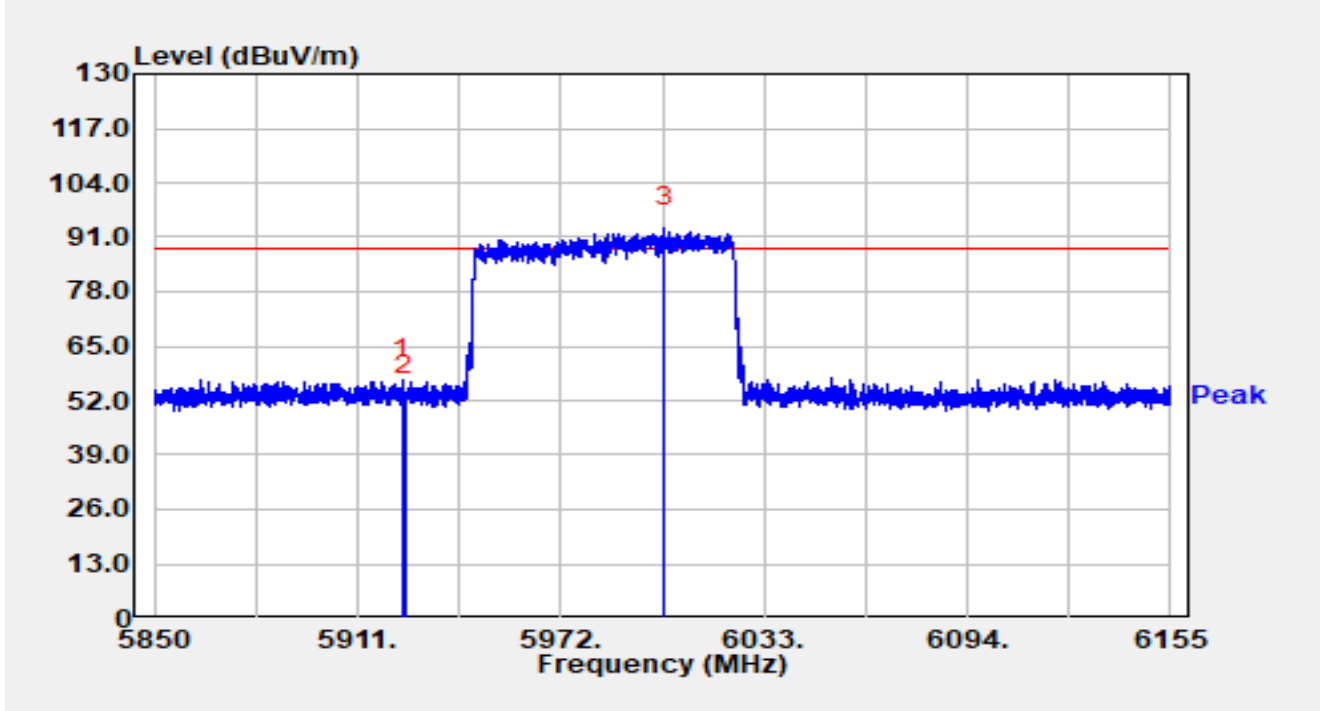


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5924.359        | 35.96          | 21.12      | 57.09                | -31.11      | 88.20          | Peak     |
| 2  |      | 5925.000        | 32.15          | 21.12      | 53.27                | -34.93      | 88.20          | Peak     |
| 3  |      | 6003.232        | 72.31          | 21.06      | 93.38                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 5985MHz |               |              |

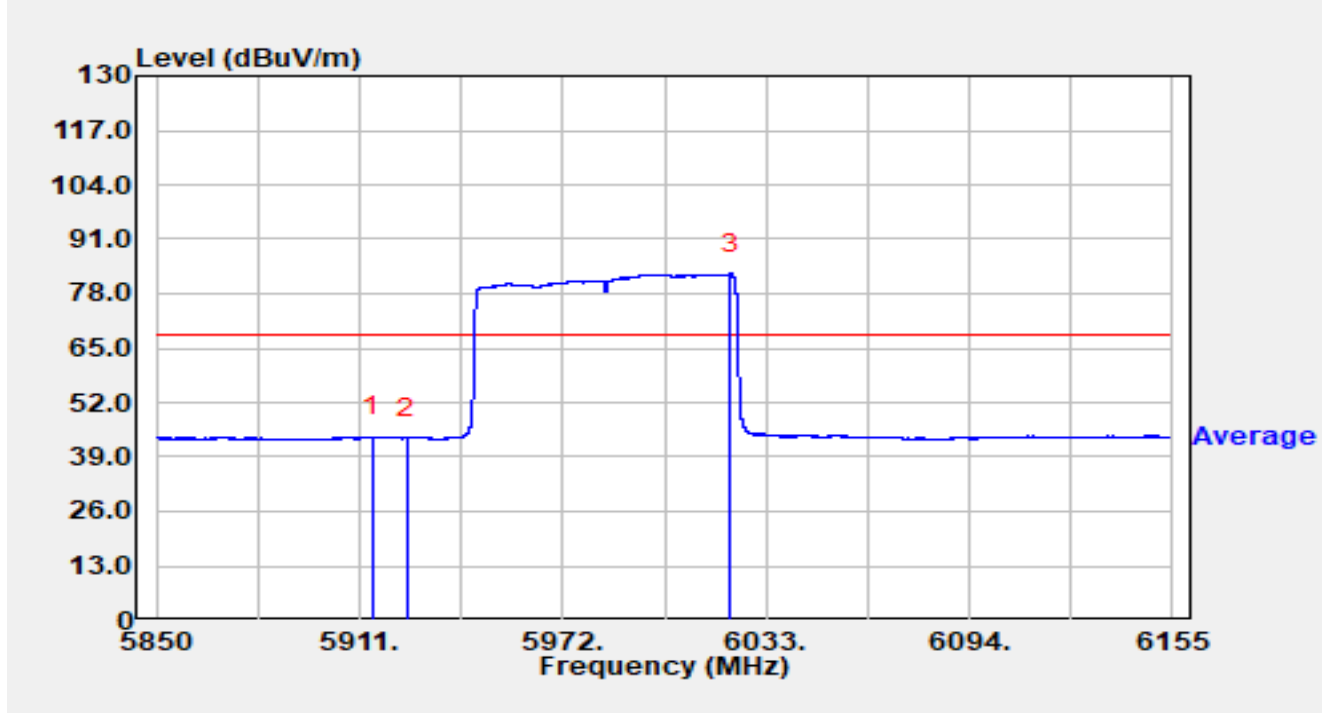


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5914.965        | 22.58          | 21.09      | 43.68                | -24.52      | 68.20          | Average  |
| 2  |      | 5925.000        | 22.41          | 21.12      | 43.53                | -24.67      | 68.20          | Average  |
| 3  |      | 6022.294        | 61.43          | 21.25      | 82.68                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 5985MHz |               |              |

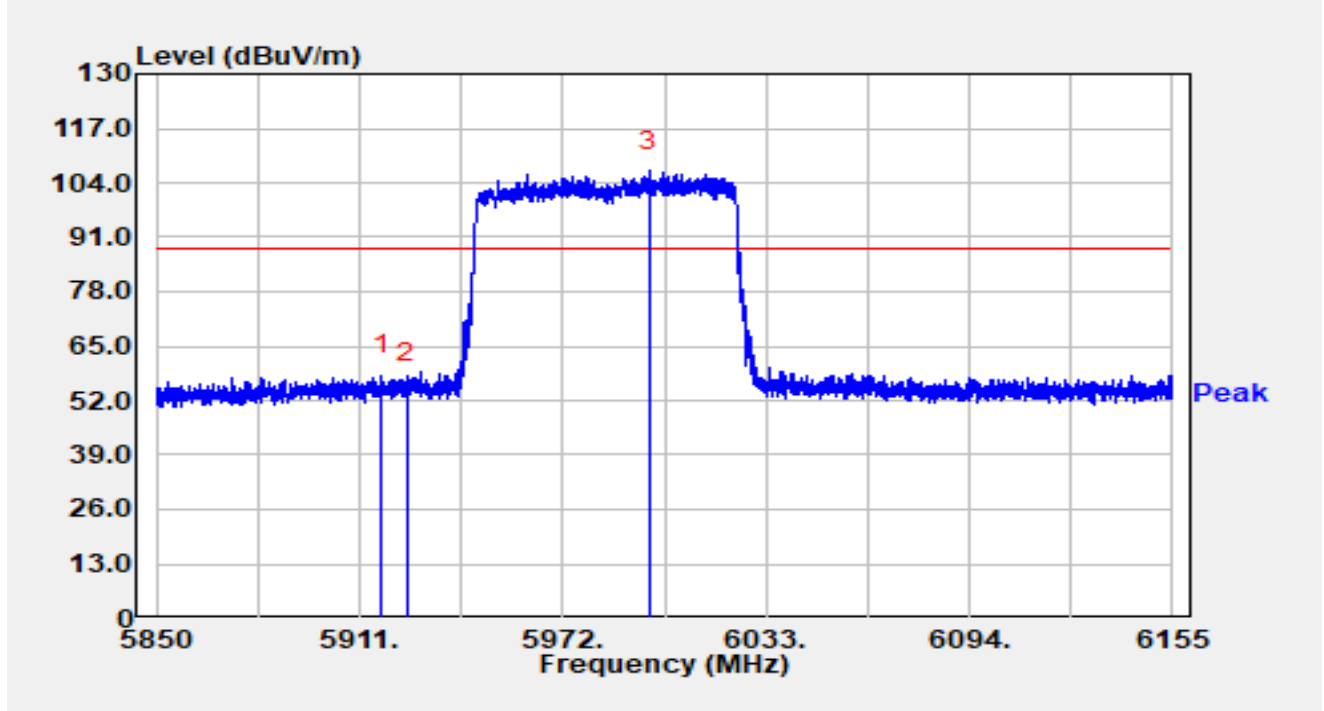


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5917.527        | 36.83          | 21.10      | 57.94                | -30.26      | 88.20          | Peak     |
| 2  |      | 5925.000        | 35.15          | 21.12      | 56.27                | -31.93      | 88.20          | Peak     |
| 3  |      | 5997.833        | 85.73          | 21.00      | 106.73               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 5985MHz |               |              |

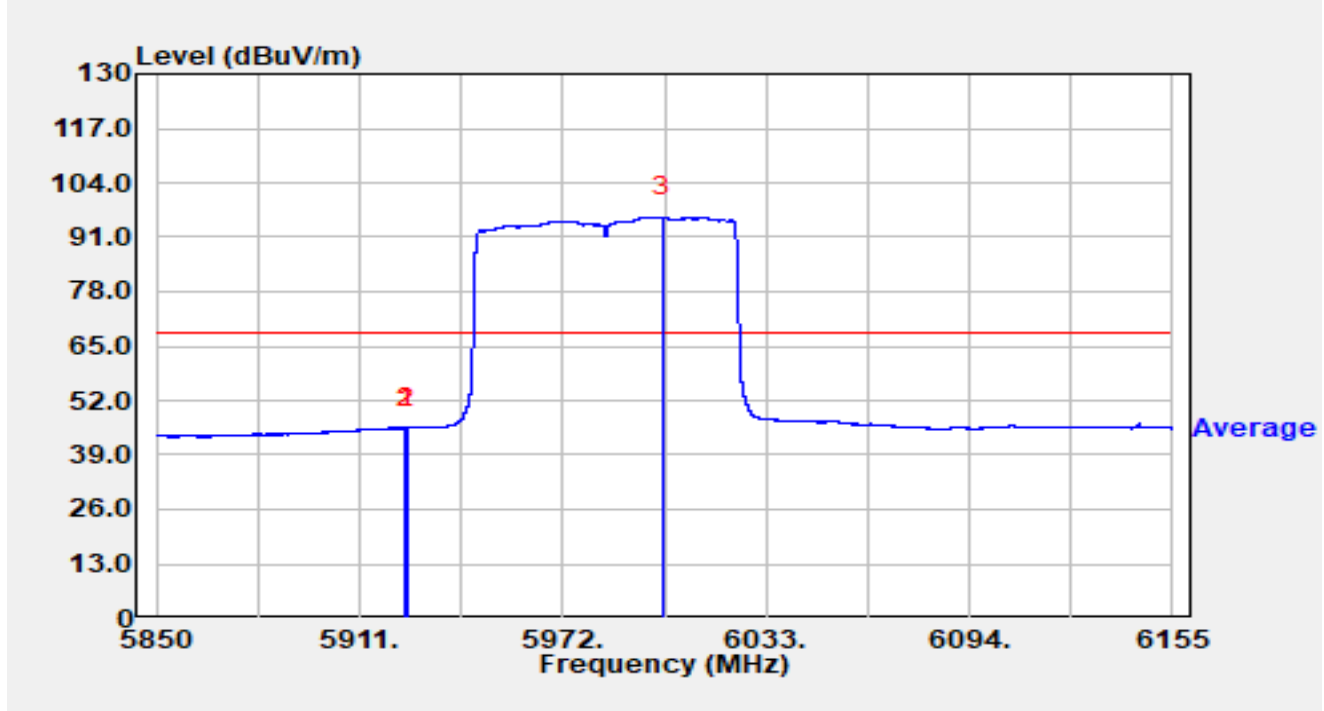


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5924.969        | 24.38          | 21.12      | 45.50                | -22.70      | 68.20          | Average  |
| 2  |      | 5925.000        | 24.36          | 21.12      | 45.48                | -22.72      | 68.20          | Average  |
| 3  |      | 6002.073        | 74.84          | 21.05      | 95.88                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 7025MHz |               |              |

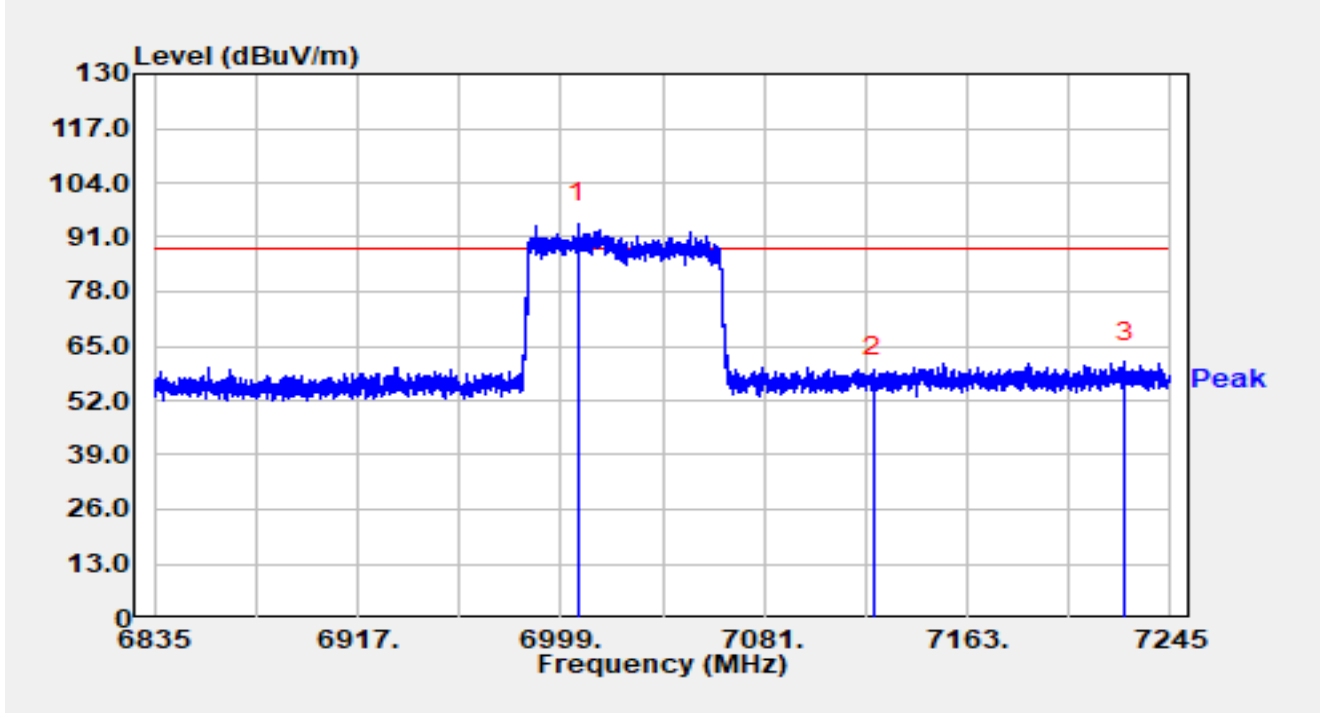


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7006.011        | 70.66          | 23.55      | 94.20                | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 33.37          | 24.48      | 57.85                | -30.35      | 88.20          | Peak     |
| 3  | *    | 7226.755        | 36.39          | 24.74      | 61.13                | -27.07      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 7025MHz |               |              |

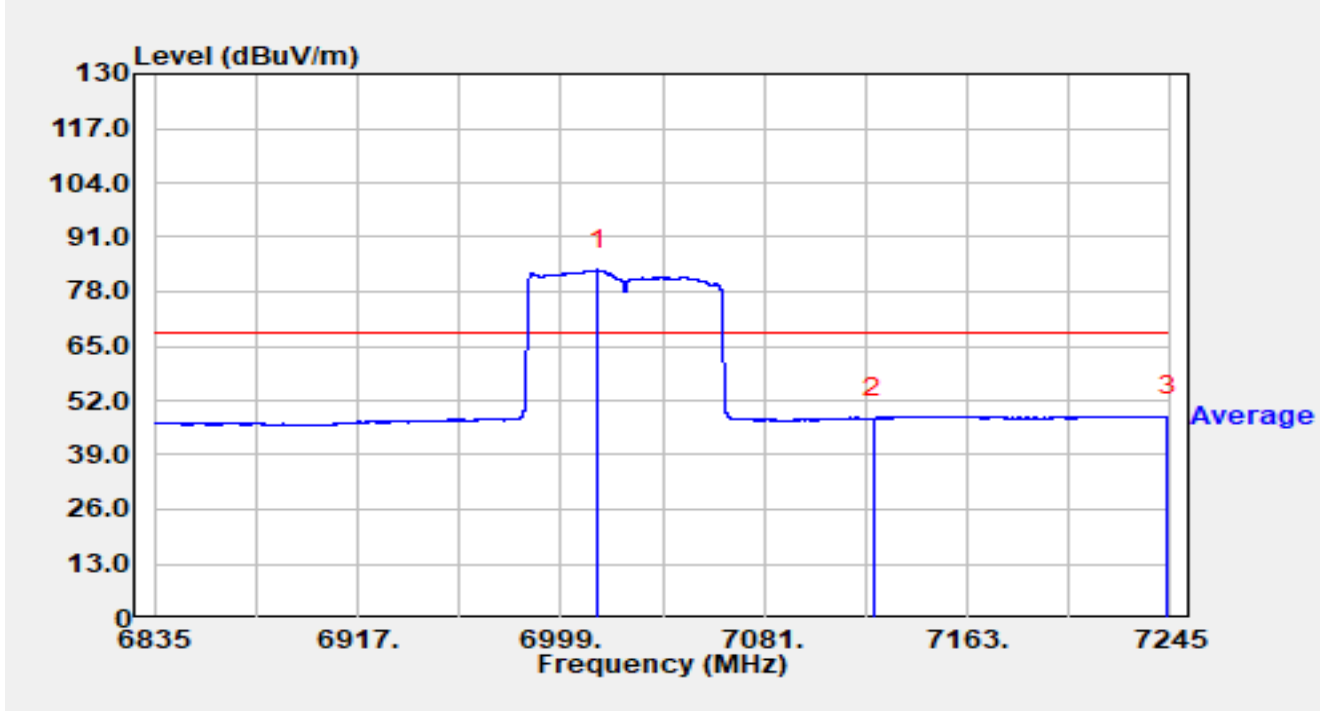


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7013.842        | 59.54          | 23.66      | 83.20                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 23.26          | 24.48      | 47.74                | -20.46      | 68.20          | Average  |
| 3  | *    | 7243.606        | 23.41          | 24.90      | 48.32                | -19.88      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 7025MHz |               |              |

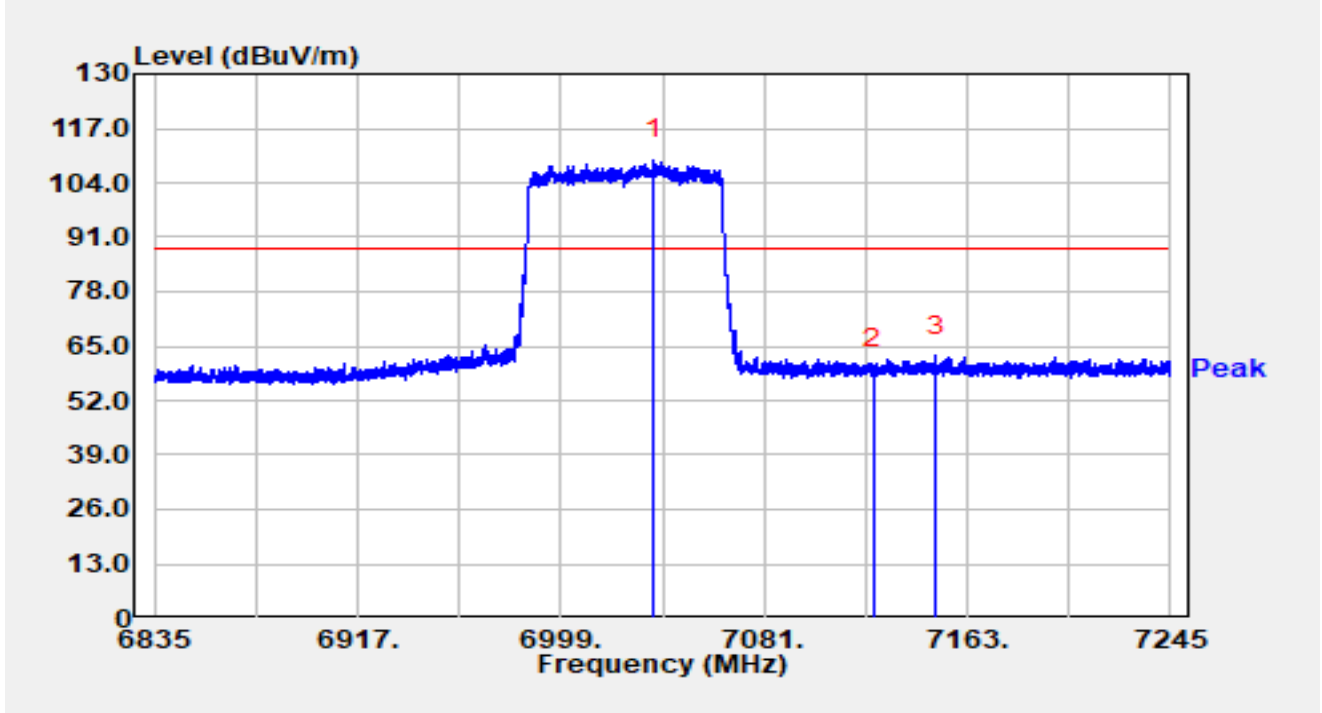


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7036.351        | 85.27          | 24.17      | 109.43               | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 34.98          | 24.48      | 59.46                | -28.74      | 88.20          | Peak     |
| 3  | *    | 7150.372        | 37.87          | 24.78      | 62.65                | -25.55      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                       |               |              |
|-------------|---------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                               | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                     | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                      | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router        | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT80 at 7025MHz |               |              |

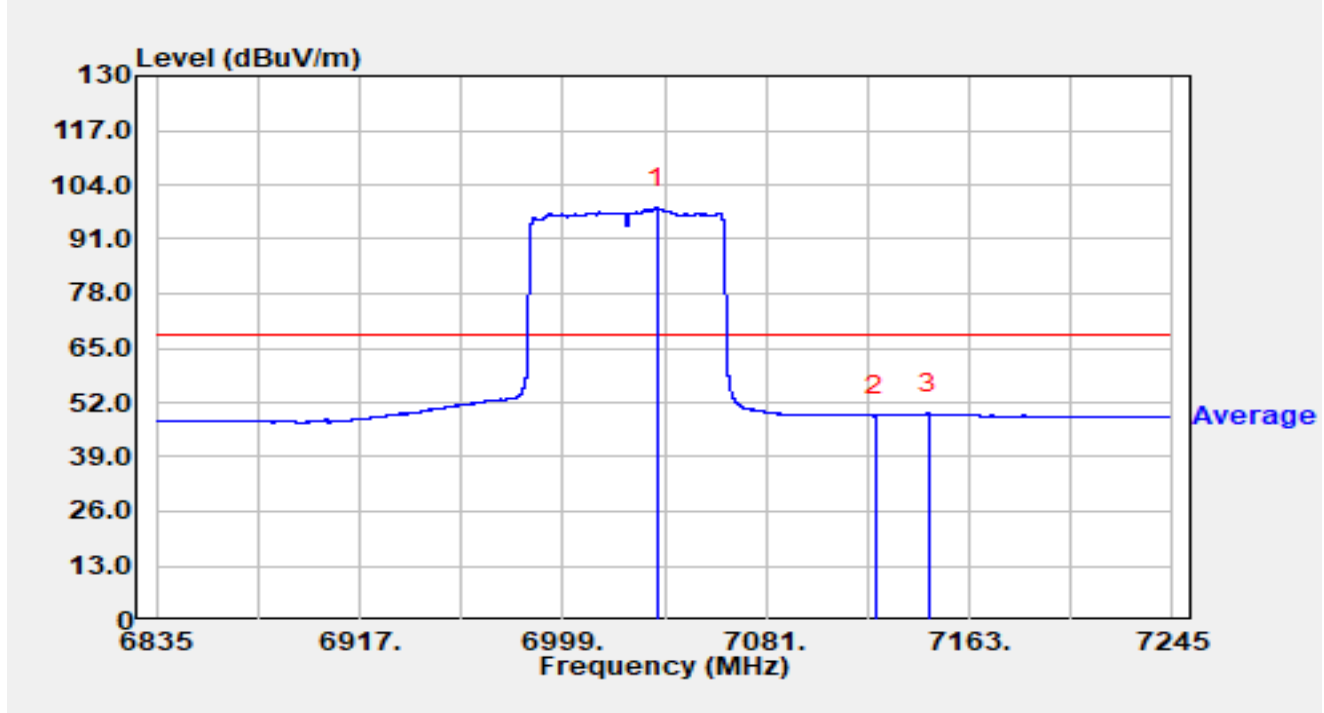


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7036.884        | 74.29          | 24.17      | 98.47                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 24.41          | 24.48      | 48.90                | -19.30      | 68.20          | Average  |
| 3  | *    | 7146.477        | 24.58          | 24.74      | 49.32                | -18.88      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6025MHz |               |              |

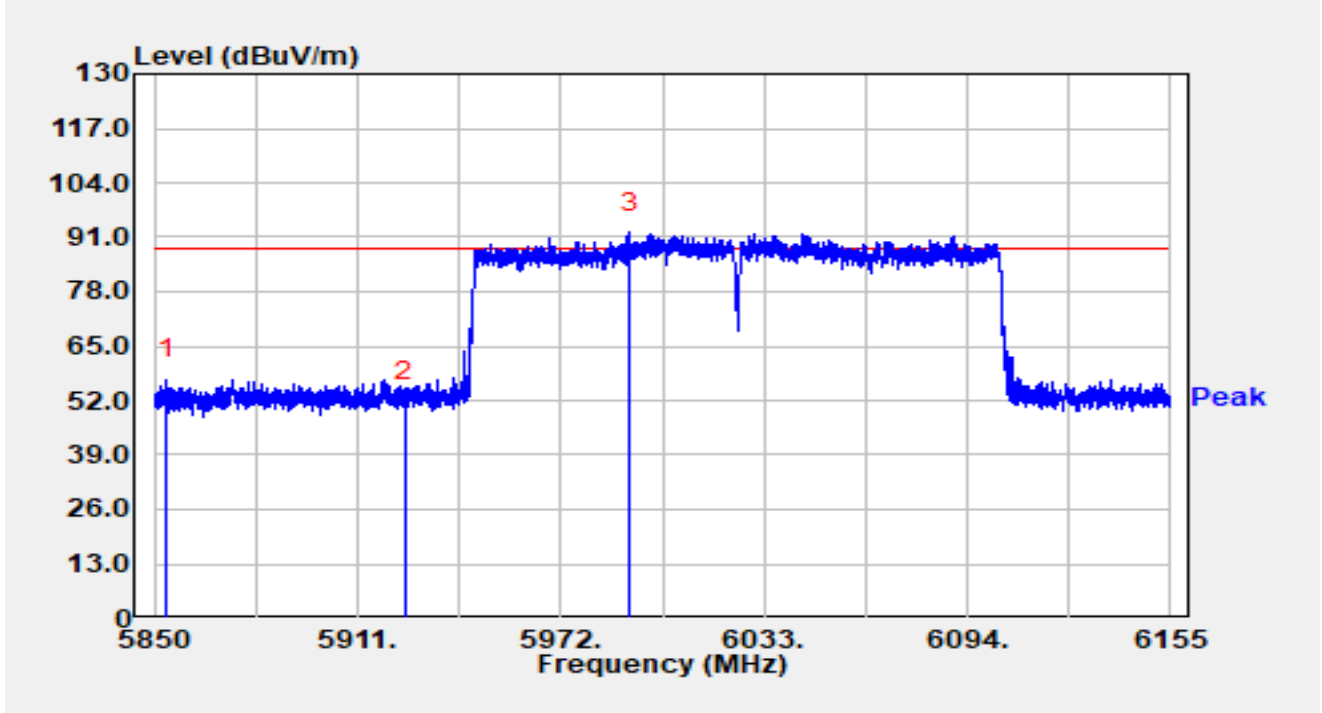


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5853.782        | 36.34          | 20.76      | 57.10                | -31.10      | 88.20          | Peak     |
| 2  |      | 5925.000        | 30.80          | 21.12      | 51.92                | -36.28      | 88.20          | Peak     |
| 3  |      | 5992.740        | 71.04          | 20.97      | 92.01                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6025MHz |               |              |

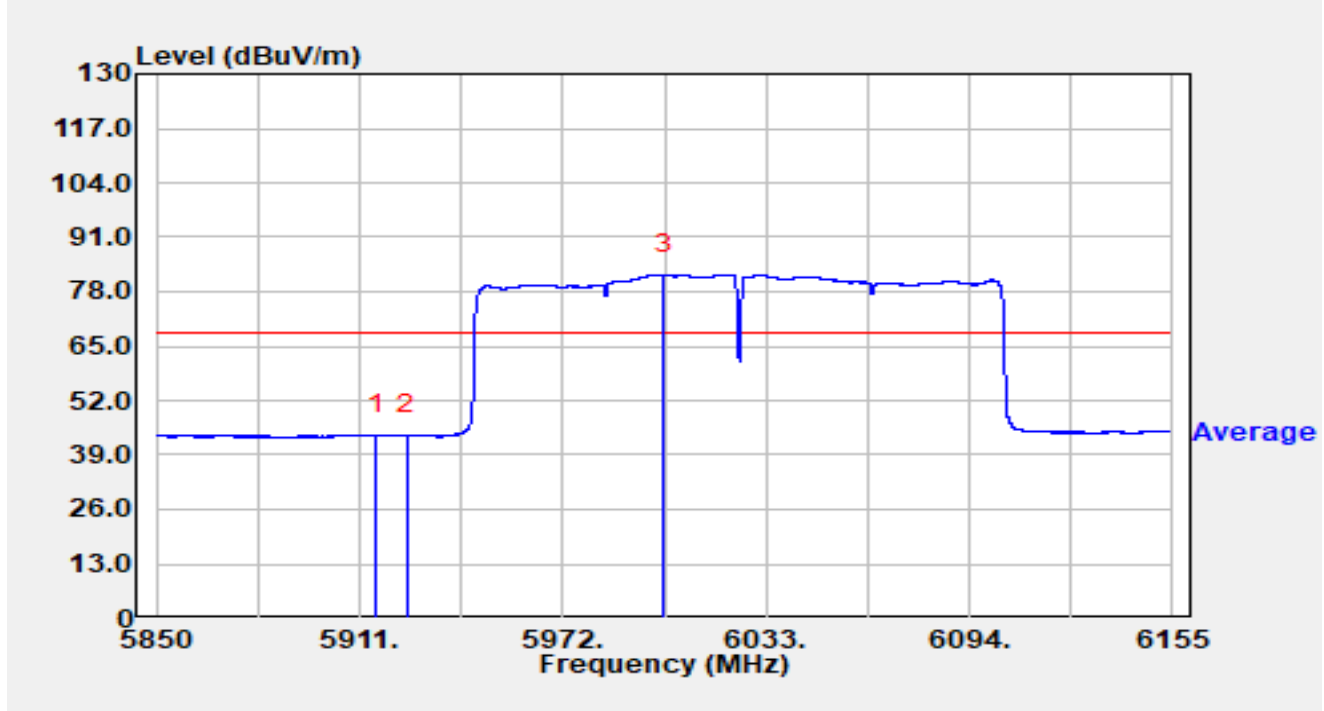


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5915.850        | 22.73          | 21.10      | 43.83                | -24.37      | 68.20          | Average  |
| 2  |      | 5925.000        | 22.54          | 21.12      | 43.66                | -24.54      | 68.20          | Average  |
| 3  |      | 6002.104        | 61.08          | 21.05      | 82.13                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6025MHz |               |              |

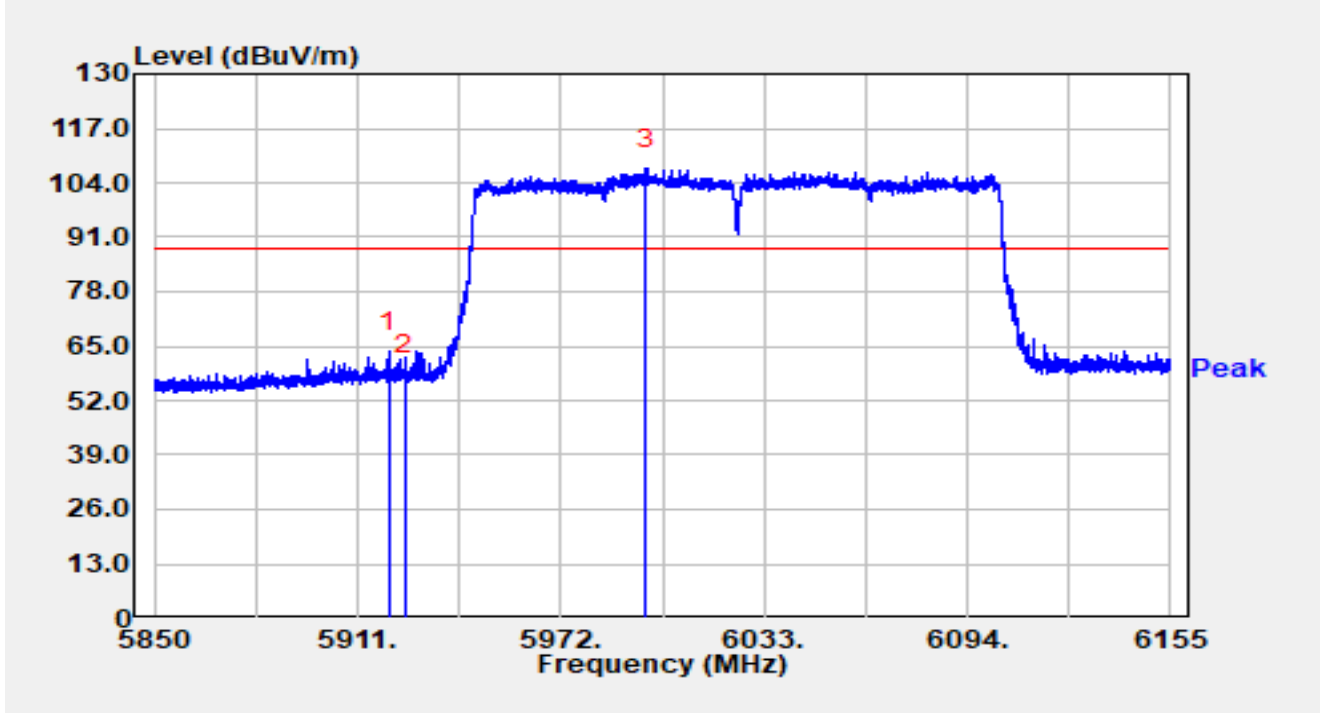


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5920.577        | 42.52          | 21.11      | 63.64                | -24.56      | 88.20          | Peak     |
| 2  |      | 5925.000        | 36.88          | 21.12      | 58.00                | -30.20      | 88.20          | Peak     |
| 3  |      | 5997.681        | 86.42          | 21.00      | 107.42               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6025MHz |               |              |

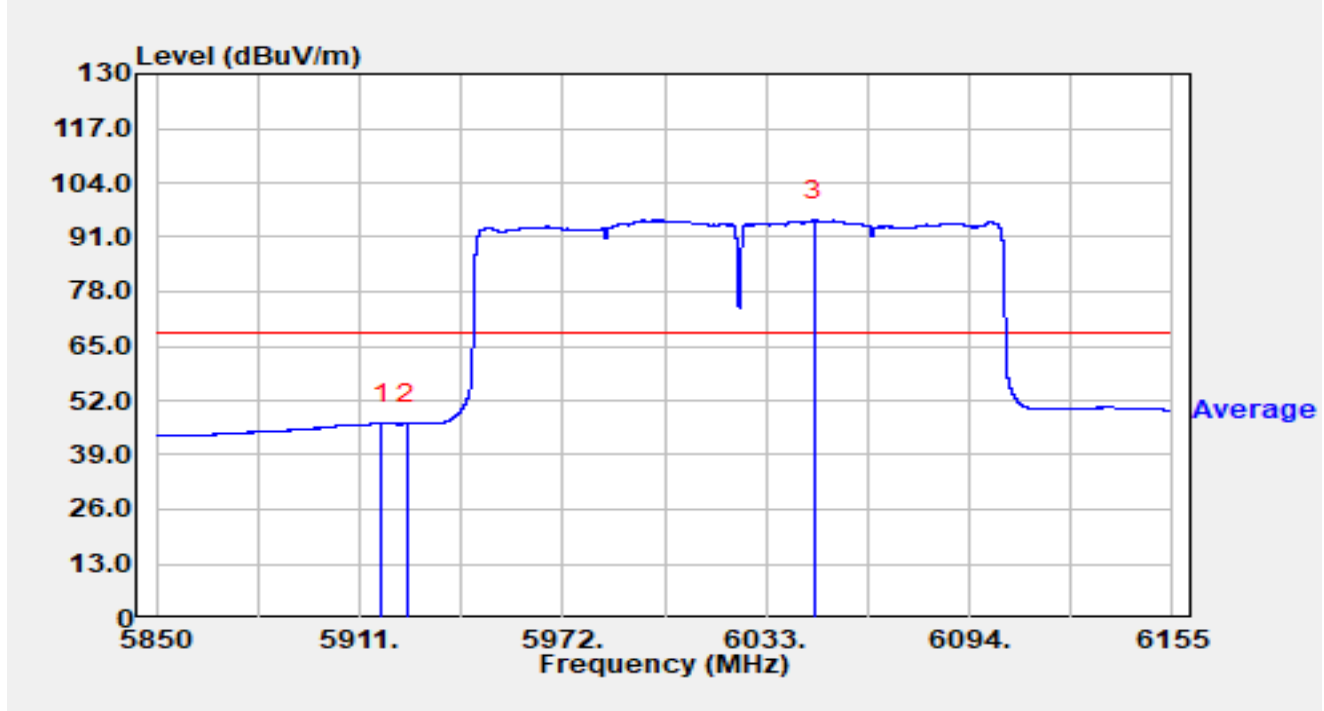


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5917.436        | 25.43          | 21.10      | 46.53                | -21.67      | 68.20          | Average  |
| 2  |      | 5925.000        | 25.33          | 21.12      | 46.45                | -21.75      | 68.20          | Average  |
| 3  |      | 6047.609        | 74.12          | 21.05      | 95.17                | N/A         | N/A            | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6985MHz |               |              |

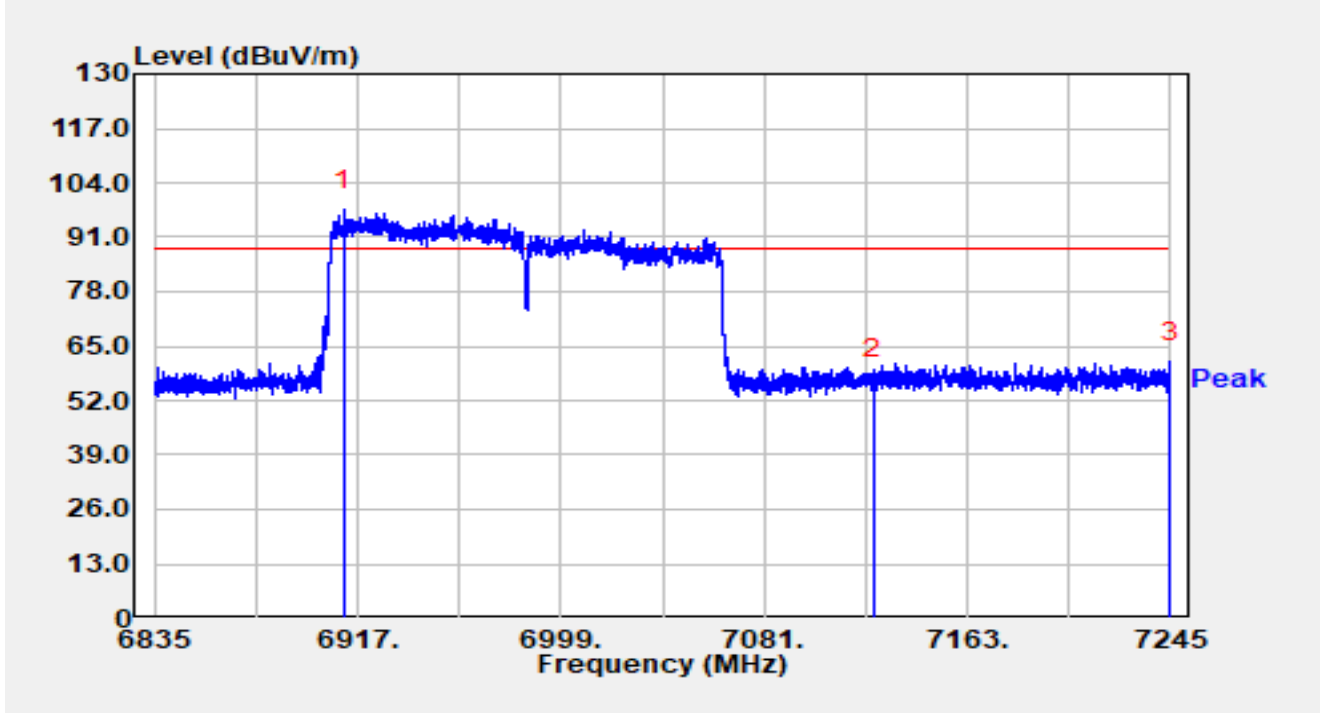


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6911.383        | 74.30          | 23.26      | 97.55                | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 32.51          | 24.48      | 57.00                | -31.20      | 88.20          | Peak     |
| 3  | *    | 7244.795        | 36.39          | 24.92      | 61.30                | -26.90      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6985MHz |               |              |

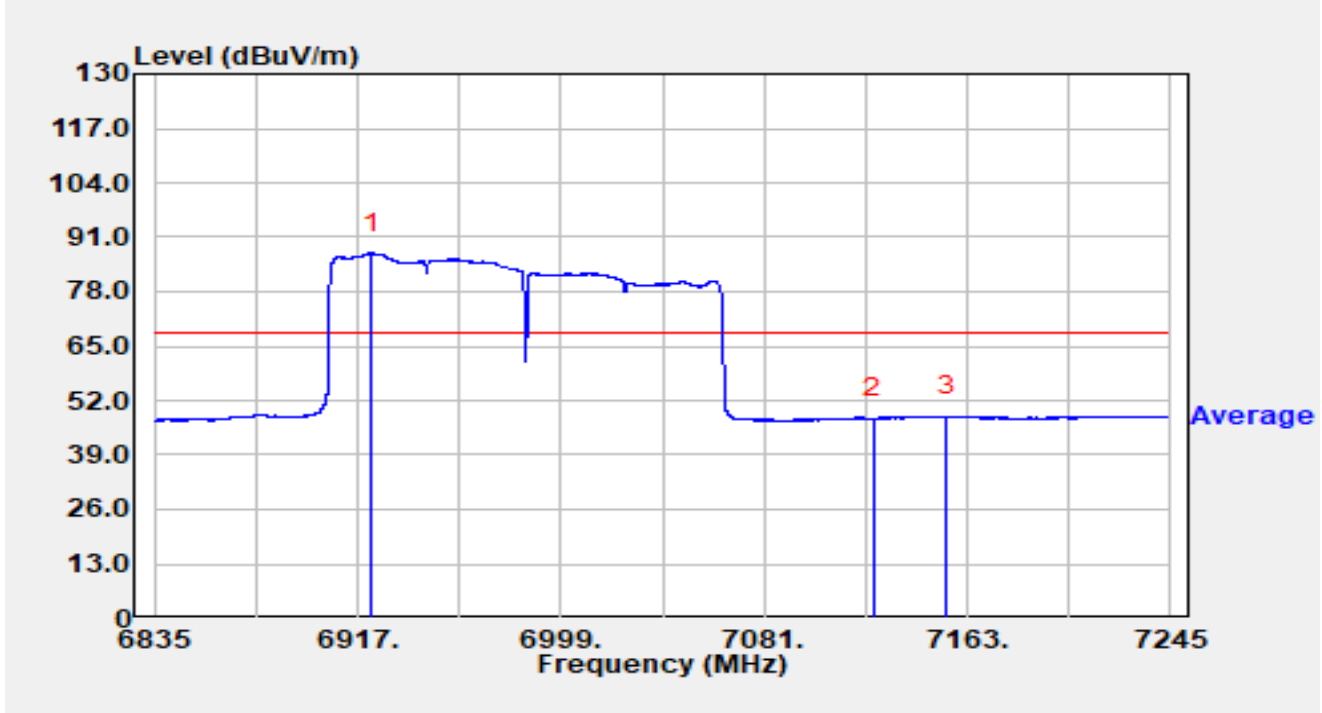


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6922.412        | 63.84          | 23.44      | 87.28                | N/A         | N/A            | Average  |
| 2  |      | 7124.993        | 23.25          | 24.48      | 47.73                | -20.47      | 68.20          | Average  |
| 3  | *    | 7154.800        | 23.51          | 24.79      | 48.30                | -19.90      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6985MHz |               |              |

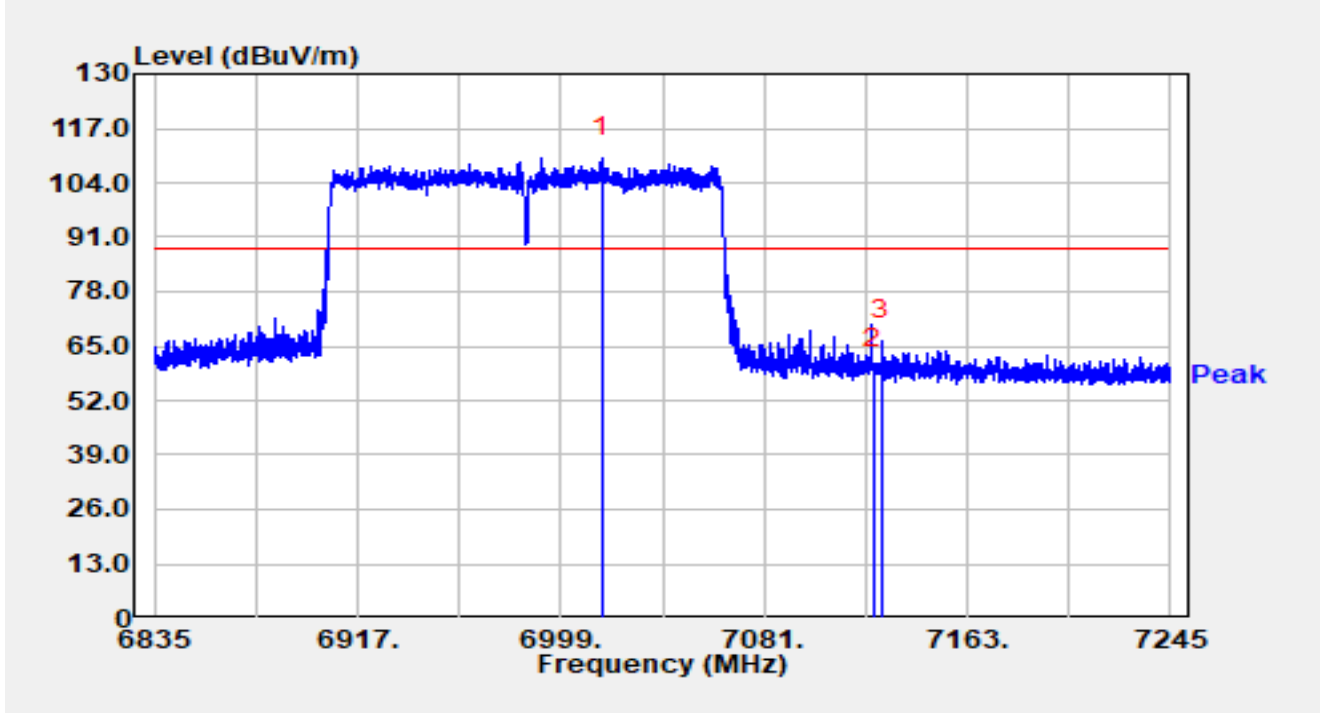


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7015.400        | 86.26          | 23.69      | 109.95               | N/A         | N/A            | Peak     |
| 2  |      | 7124.993        | 35.26          | 24.48      | 59.74                | -28.46      | 88.20          | Peak     |
| 3  | *    | 7128.273        | 41.80          | 24.50      | 66.30                | -21.90      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT160 at 6985MHz |               |              |

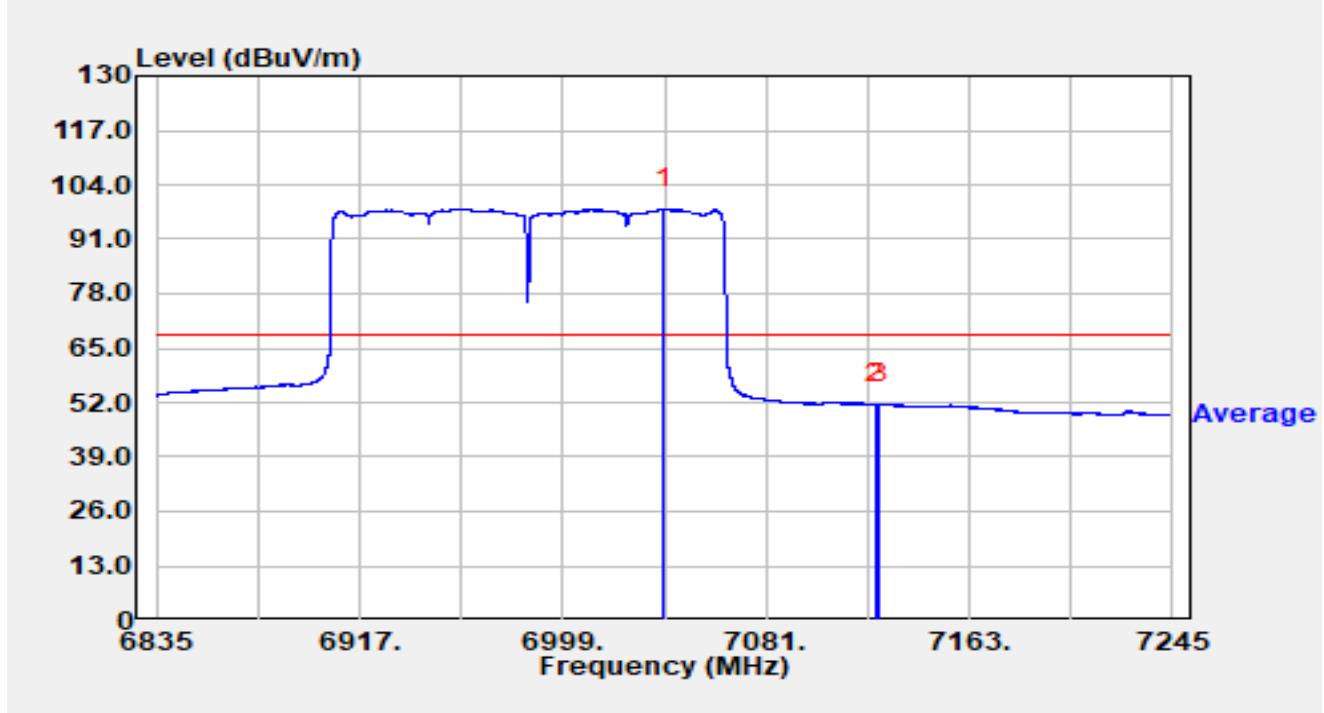


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 7039.877        | 74.03          | 24.20      | 98.23                | N/A         | N/A            | Average  |
| 2  | *    | 7124.993        | 27.19          | 24.48      | 51.67                | -16.53      | 68.20          | Average  |
| 3  |      | 7126.592        | 27.18          | 24.49      | 51.67                | -16.53      | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6105MHz |               |              |

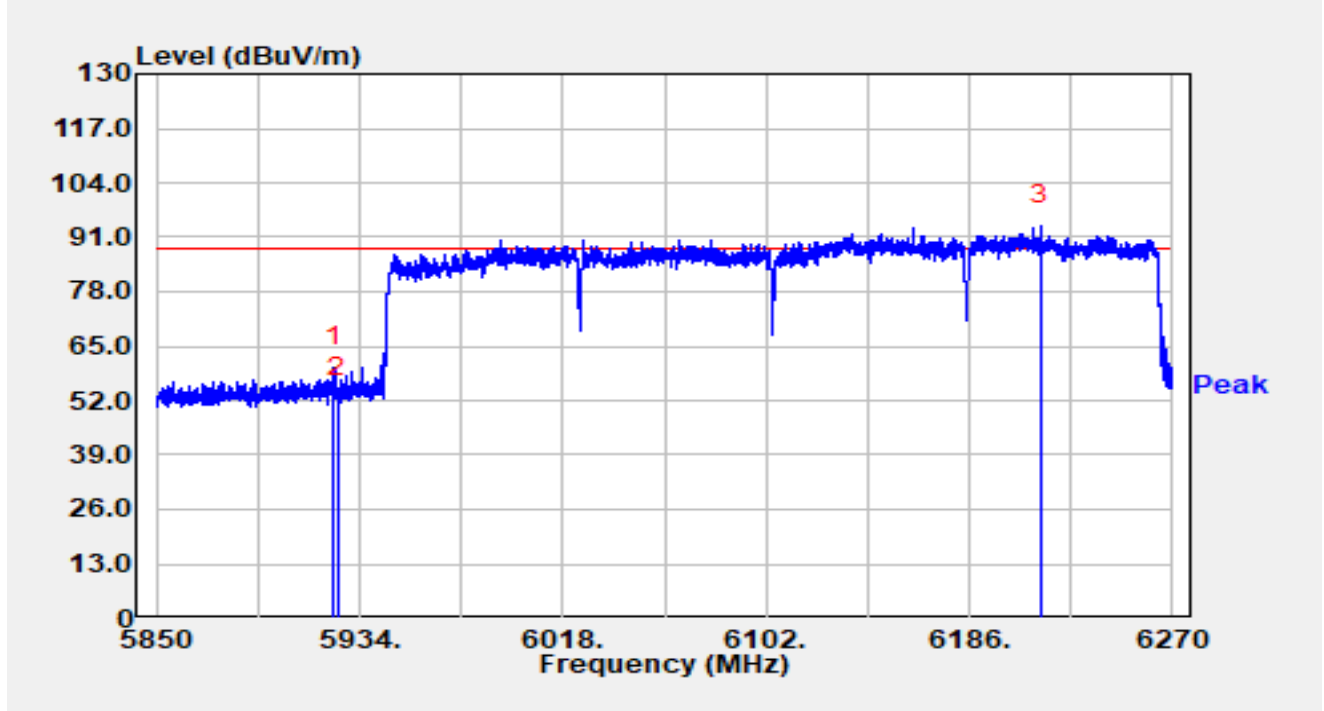


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5923.542        | 38.80          | 21.12      | 59.93                | -28.27      | 88.20          | Peak     |
| 2  |      | 5925.012        | 31.80          | 21.12      | 52.92                | -35.28      | 88.20          | Peak     |
| 3  |      | 6215.568        | 72.09          | 21.63      | 93.72                | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-14   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6105MHz |               |              |

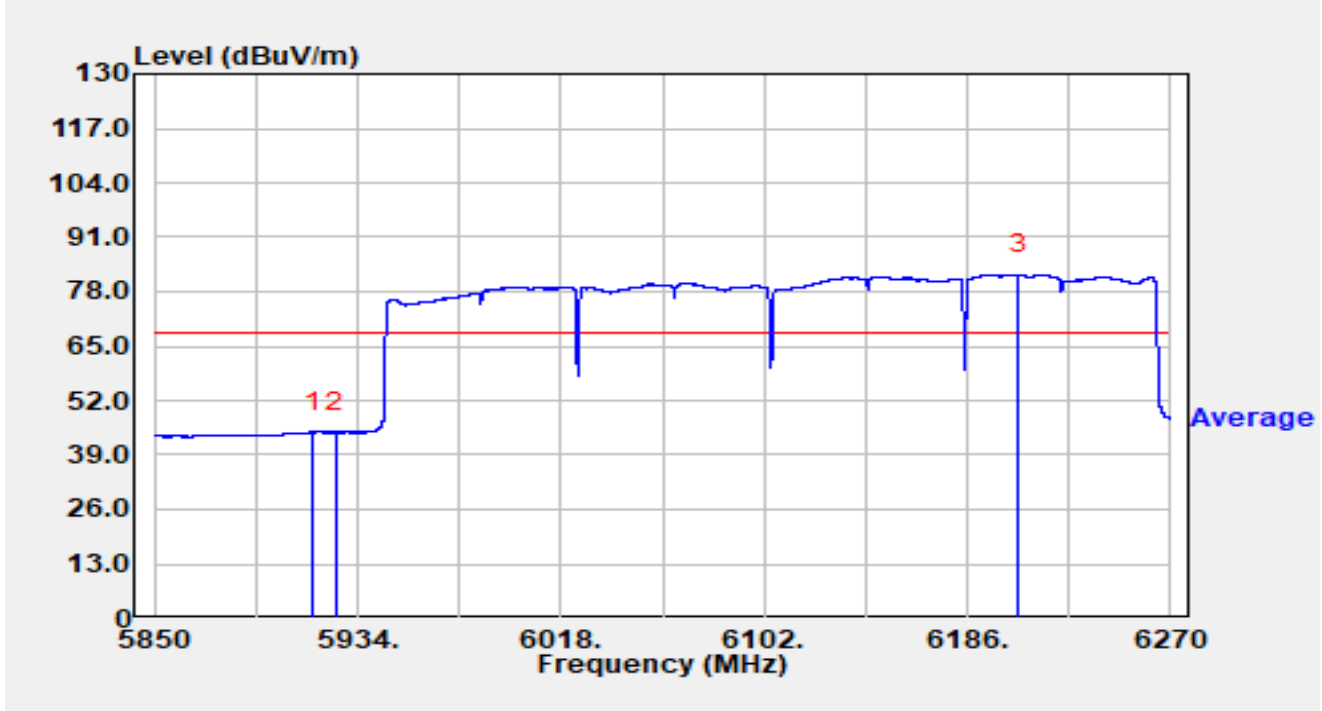


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5915.730        | 23.44          | 21.10      | 44.54                | -23.66      | 68.20          | Average  |
| 2  |      | 5925.012        | 23.29          | 21.12      | 44.41                | -23.79      | 68.20          | Average  |
| 3  |      | 6207.042        | 60.66          | 21.45      | 82.11                | N/A         | N/A            | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-15   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6105MHz |               |              |

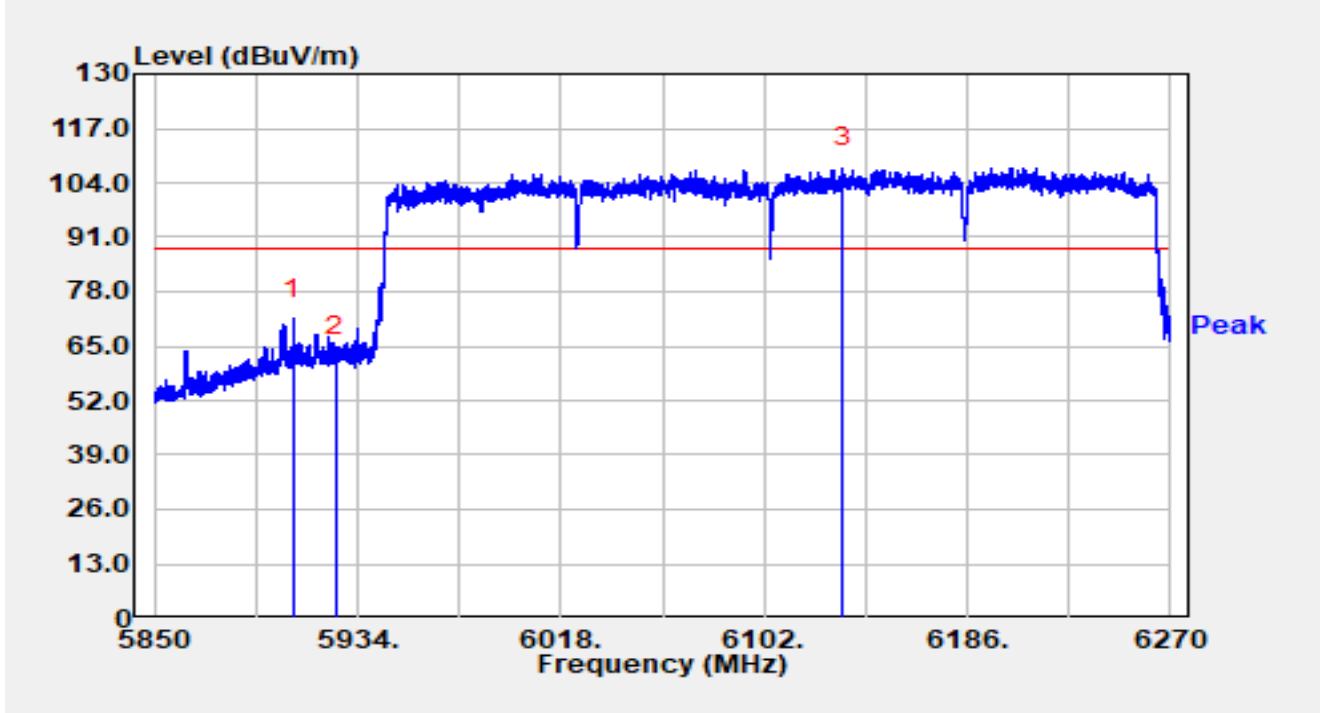


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5907.498        | 50.58          | 21.03      | 71.61                | -16.59      | 88.20          | Peak     |
| 2  |      | 5925.012        | 41.42          | 21.12      | 62.55                | -25.65      | 88.20          | Peak     |
| 3  |      | 6134.718        | 86.10          | 21.37      | 107.47               | N/A         | N/A            | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-15   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6105MHz |               |              |

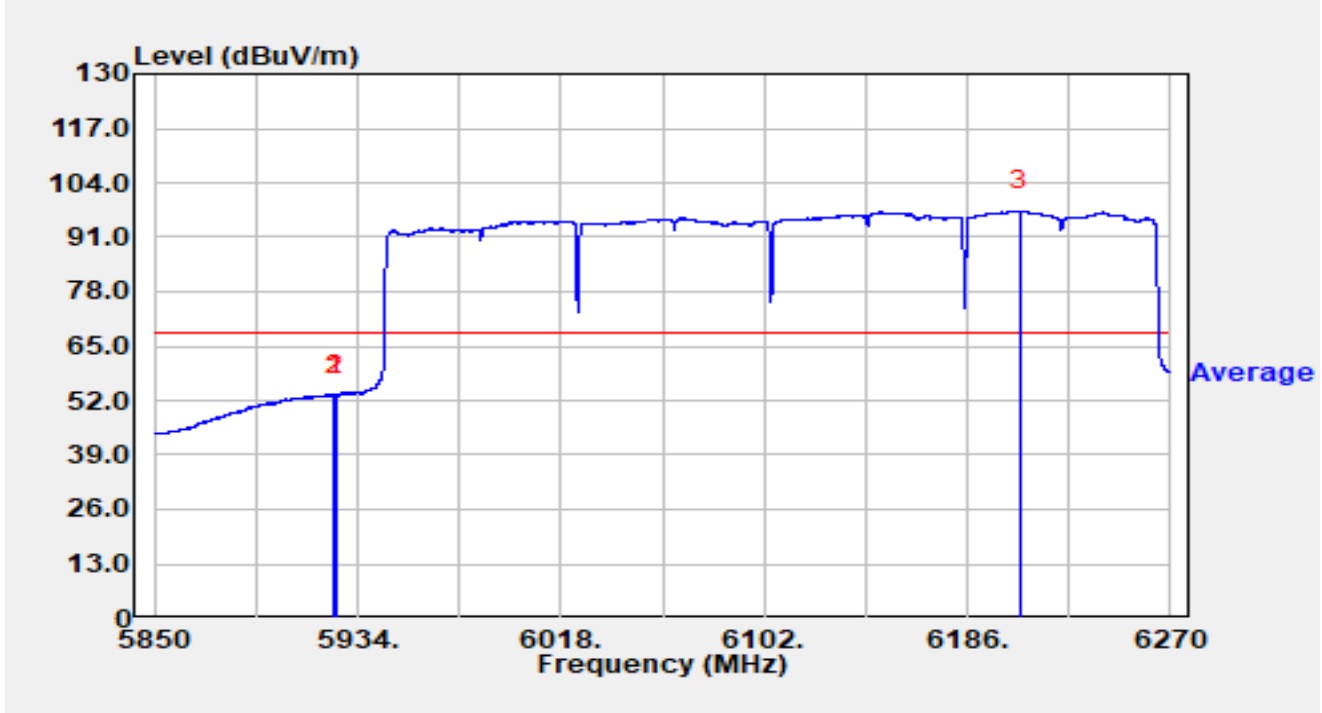


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 5924.130        | 32.26          | 21.12      | 53.38                | -14.82      | 68.20          | Average  |
| 2  |      | 5925.012        | 32.07          | 21.12      | 53.20                | -15.00      | 68.20          | Average  |
| 3  |      | 6207.714        | 75.74          | 21.47      | 97.20                | N/A         | N/A            | Average  |

Notes:

- "\*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-15   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6905MHz |               |              |

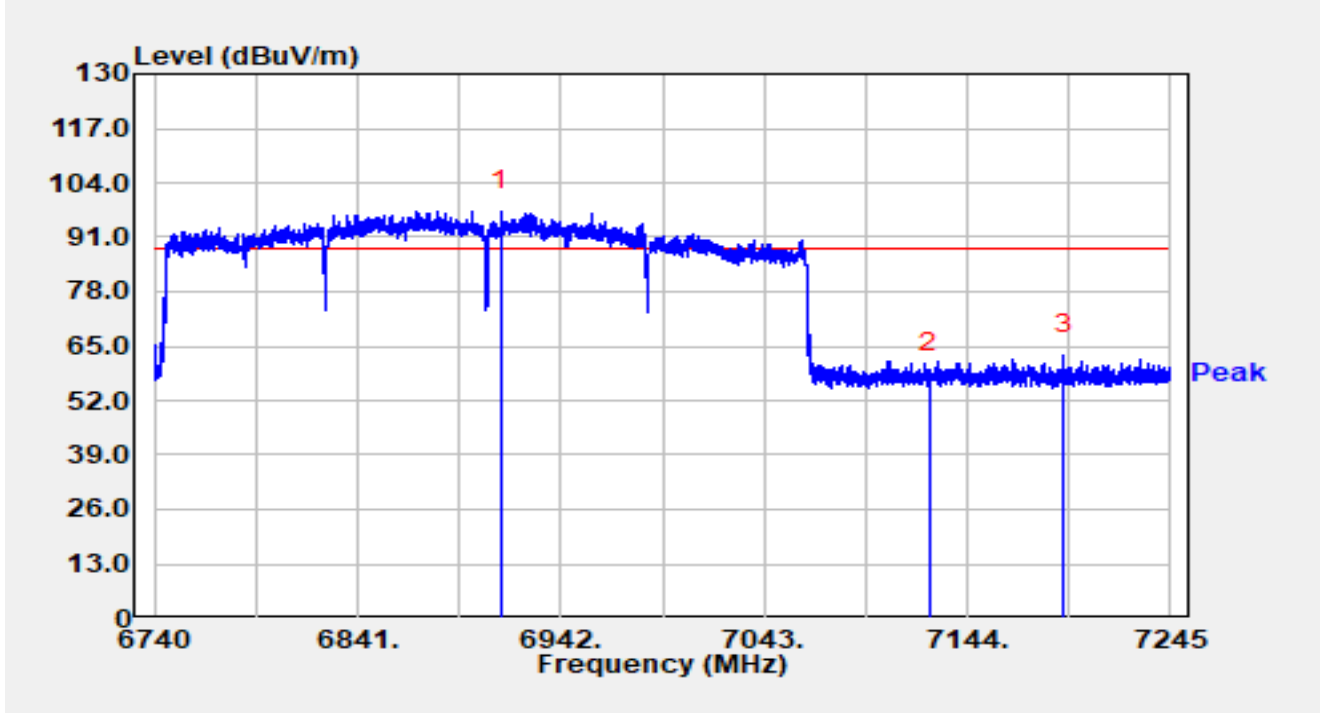


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6912.458        | 73.95          | 23.28      | 97.23                | N/A         | N/A            | Peak     |
| 2  |      | 7125.000        | 34.25          | 24.48      | 58.74                | -29.46      | 88.20          | Peak     |
| 3  | *    | 7192.025        | 38.37          | 24.50      | 62.86                | -25.34      | 88.20          | Peak     |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-15   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Horizontal   |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6905MHz |               |              |

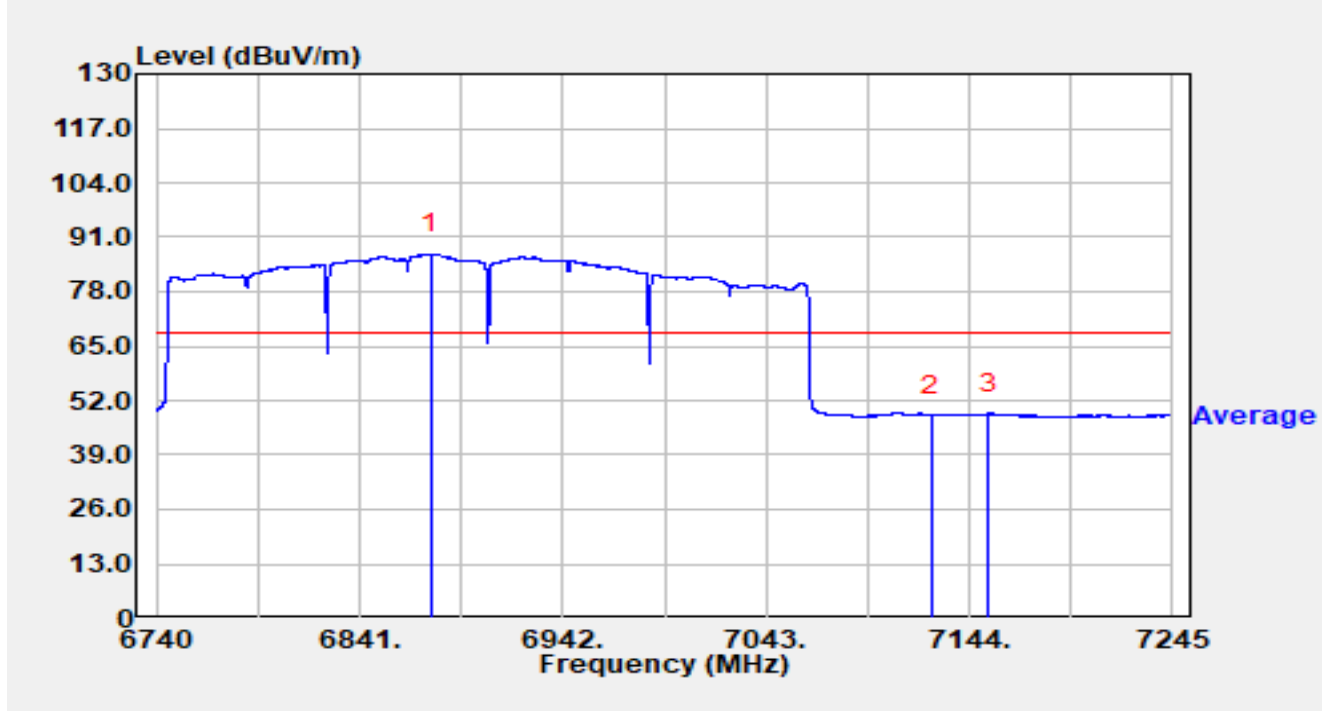


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6876.098        | 63.79          | 23.14      | 86.93                | N/A         | N/A            | Average  |
| 2  |      | 7125.012        | 24.07          | 24.48      | 48.55                | -19.65      | 68.20          | Average  |
| 3  | *    | 7153.242        | 24.09          | 24.79      | 48.88                | -19.32      | 68.20          | Average  |

Notes:

- " \* ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-15   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-PK                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6905MHz |               |              |

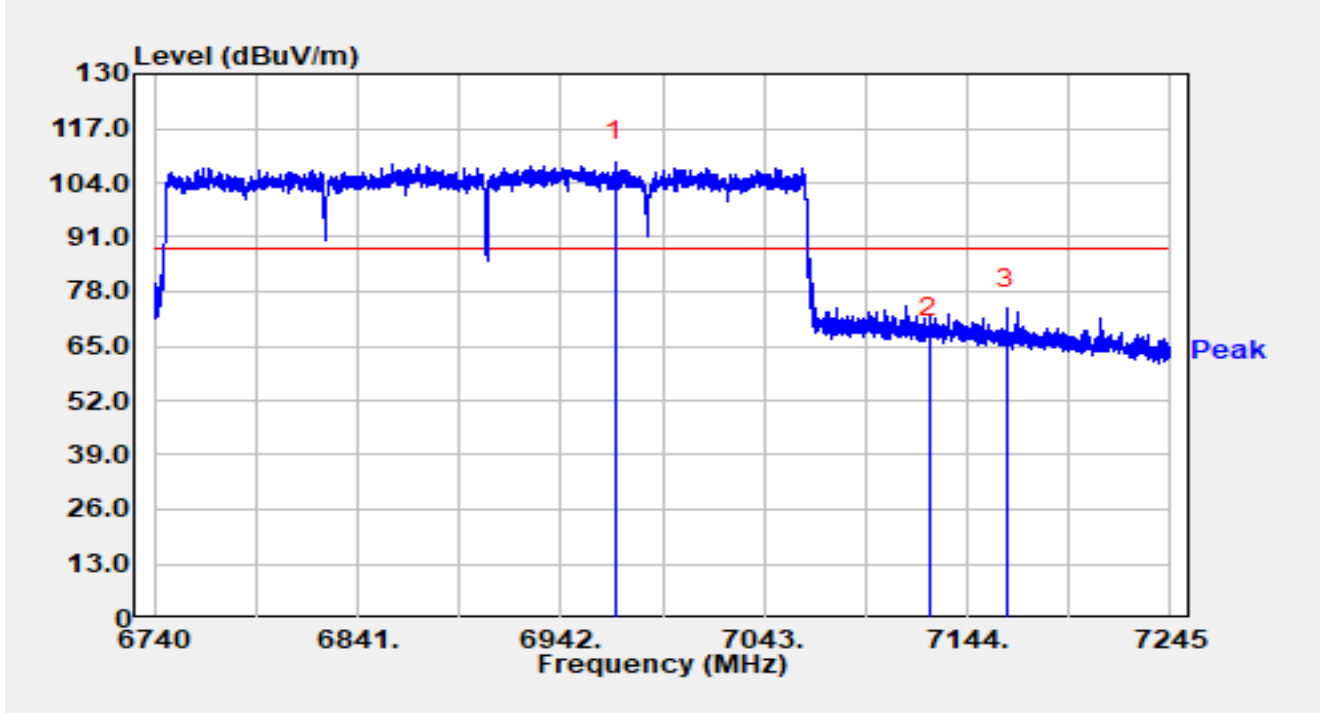


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6969.068        | 85.46          | 23.55      | 109.01               | N/A         | N/A            | Peak     |
| 2  |      | 7125.012        | 42.52          | 24.48      | 67.00                | -21.20      | 88.20          | Peak     |
| 3  | *    | 7163.594        | 49.29          | 24.68      | 73.97                | -14.23      | 88.20          | Peak     |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-AC1                                 | Test Date     | 2025-03-15   |
| Temperature | 19.2 °C                                | Humidity      | 35.7 %       |
| Limit       | FCC_6G RE (3m)-AV                      | Test Engineer | Lucas Wang   |
| Factor      | BBHA 9120D_01167                       | Polarity      | Vertical     |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6905MHz |               |              |

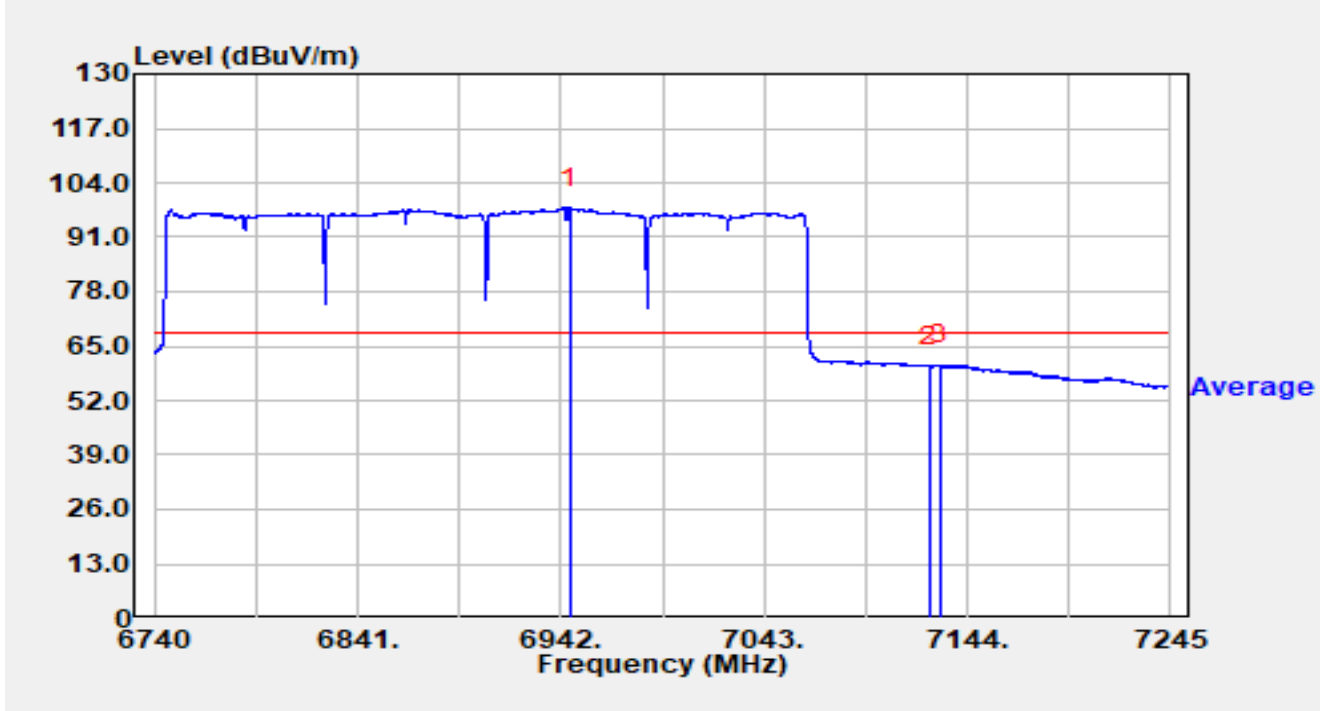


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 6946.292        | 74.32          | 23.72      | 98.04                | N/A         | N/A            | Average  |
| 2  |      | 7125.000        | 35.78          | 24.48      | 60.26                | -7.94       | 68.20          | Average  |
| 3  | *    | 7130.466        | 35.95          | 24.53      | 60.48                | -7.72       | 68.20          | Average  |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### A.10 AC Conducted Emissions Test Result

|             |                                        |               |              |
|-------------|----------------------------------------|---------------|--------------|
| Site        | WZ-SR2                                 | Test Date     | 2025-03-19   |
| Temperature | 18.8 °C                                | Humidity      | 34.8 %       |
| Limit       | FCC Part 15.207_CE_Mains               | Test Engineer | Linda Wei    |
| Factor      | ENV216_101683_L1_Filter Off_E          | Polarity      | Line1        |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router         | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11be-EHT320 at 6105MHz |               |              |

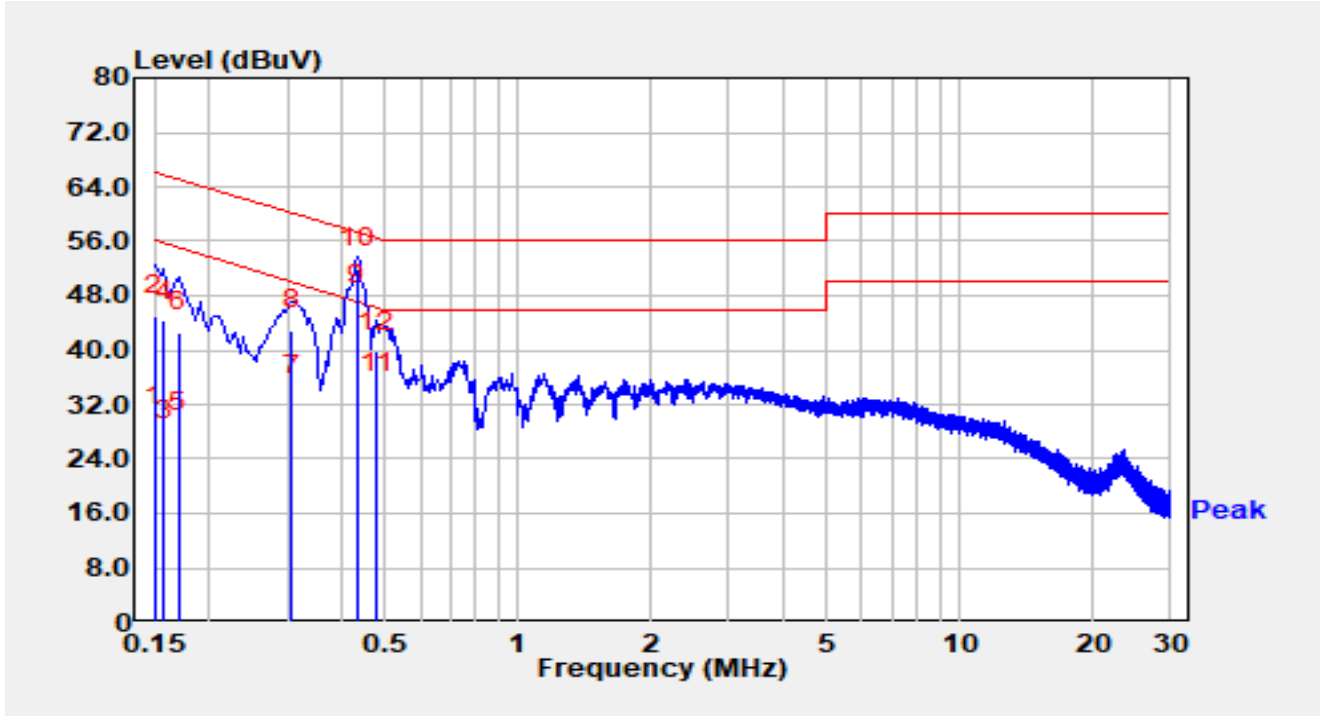


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.15            | 19.10          | 9.79     | 28.89              | -27.11      | 56.00        | Average  |
| 2  |      | 0.15            | 35.30          | 9.79     | 45.09              | -20.91      | 66.00        | QP       |
| 3  |      | 0.16            | 16.90          | 9.77     | 26.67              | -28.89      | 55.57        | Average  |
| 4  |      | 0.16            | 34.50          | 9.77     | 44.27              | -21.29      | 65.57        | QP       |
| 5  |      | 0.17            | 18.00          | 9.78     | 27.78              | -27.18      | 54.96        | Average  |
| 6  |      | 0.17            | 32.90          | 9.78     | 42.68              | -22.28      | 64.96        | QP       |
| 7  |      | 0.31            | 23.60          | 9.83     | 33.43              | -16.65      | 50.08        | Average  |
| 8  |      | 0.31            | 33.10          | 9.83     | 42.93              | -17.15      | 60.08        | QP       |
| 9  | *    | 0.43            | 36.90          | 9.89     | 46.79              | -0.42       | 47.21        | Average  |
| 10 |      | 0.43            | 42.10          | 9.89     | 51.99              | -5.22       | 57.21        | QP       |
| 11 |      | 0.48            | 23.60          | 9.92     | 33.52              | -12.86      | 46.37        | Average  |
| 12 |      | 0.48            | 29.80          | 9.92     | 39.72              | -16.66      | 56.37        | QP       |

Notes:

1. " \* ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB $\mu$ V) = Reading (dB $\mu$ V) + C.F (dB).

|             |                                         |               |              |
|-------------|-----------------------------------------|---------------|--------------|
| Site        | WZ-SR2                                  | Test Date     | 2025-03-19   |
| Temperature | 18.8 °C                                 | Humidity      | 34.8 %       |
| Limit       | FCC Part 15.207_CE_Mains                | Test Engineer | Linda Wei    |
| Factor      | ENV216_101683_N_Filter Off_E            | Polarity      | Neutral      |
| EUT         | BE9700 Tri-Band Wi-Fi 7 Router          | Test Voltage  | AC 120V/60Hz |
| Test Mode   | Transmit by 802.11 be-EHT320 at 6105MHz |               |              |

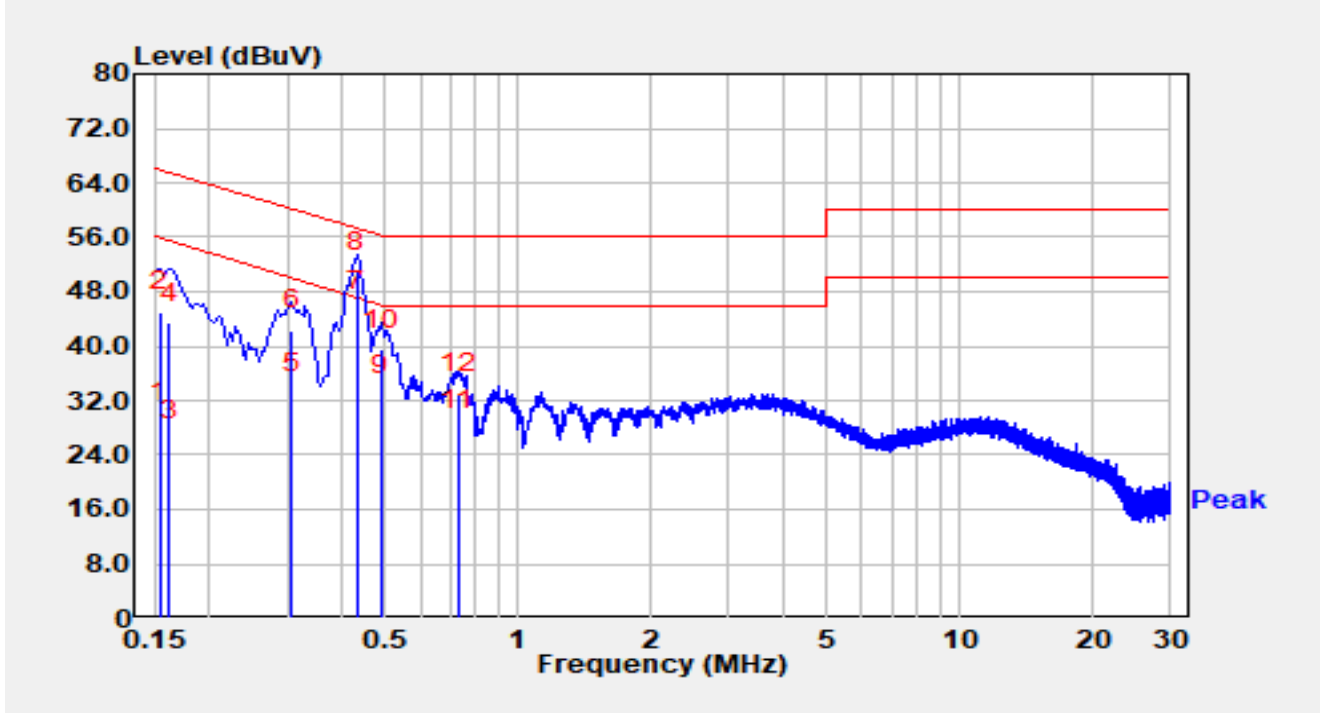

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.15            | 19.20          | 9.75     | 28.95              | -26.83      | 55.78        | Average  |
| 2  |      | 0.15            | 35.30          | 9.75     | 45.05              | -20.73      | 65.78        | QP       |
| 3  |      | 0.16            | 16.30          | 9.76     | 26.06              | -29.30      | 55.36        | Average  |
| 4  |      | 0.16            | 33.70          | 9.76     | 43.46              | -21.90      | 65.36        | QP       |
| 5  |      | 0.31            | 23.30          | 9.81     | 33.11              | -16.96      | 50.08        | Average  |
| 6  |      | 0.31            | 32.50          | 9.81     | 42.31              | -17.76      | 60.08        | QP       |
| 7  | *    | 0.43            | 35.30          | 9.88     | 45.18              | -2.08       | 47.25        | Average  |
| 8  |      | 0.43            | 41.10          | 9.88     | 50.98              | -6.28       | 57.25        | QP       |
| 9  |      | 0.49            | 22.90          | 9.90     | 32.80              | -13.36      | 46.17        | Average  |
| 10 |      | 0.49            | 29.50          | 9.90     | 39.40              | -16.76      | 56.17        | QP       |
| 11 |      | 0.73            | 17.60          | 10.03    | 27.63              | -18.37      | 46.00        | Average  |
| 12 |      | 0.73            | 23.00          | 10.03    | 33.03              | -22.97      | 56.00        | QP       |

Notes:

1. " \* ", means this data is the worst emission level.

2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB $\mu$ V) = Reading (dB $\mu$ V) + C.F (dB).

## **Appendix B – Test Setup Photograph**

Refer to “R25S1014028-UT” file.

## **Appendix C – EUT Photograph**

Refer to “R25S1014028-UE” file.

\_\_\_\_\_ The End \_\_\_\_\_