


EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

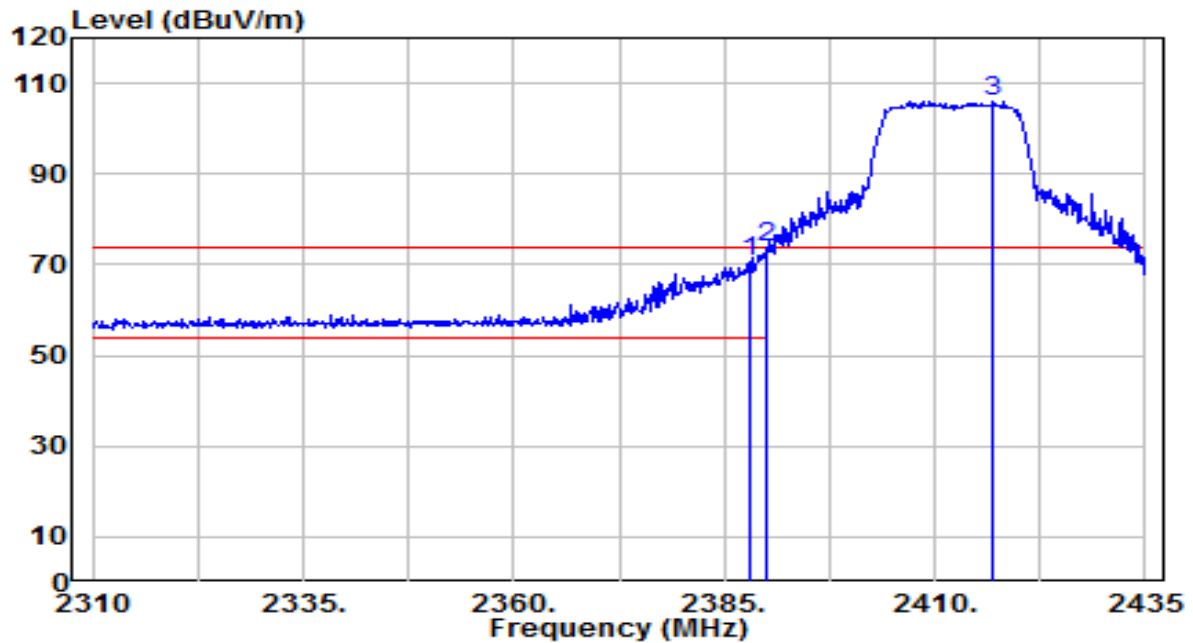


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	38.66	31.84	70.50	-3.50	74.00	155	315	Peak
2	*	2390.000	41.98	31.85	73.83	-0.17	74.00	155	315	Peak
3		2416.875	73.99	31.95	105.94	N/A	N/A	155	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

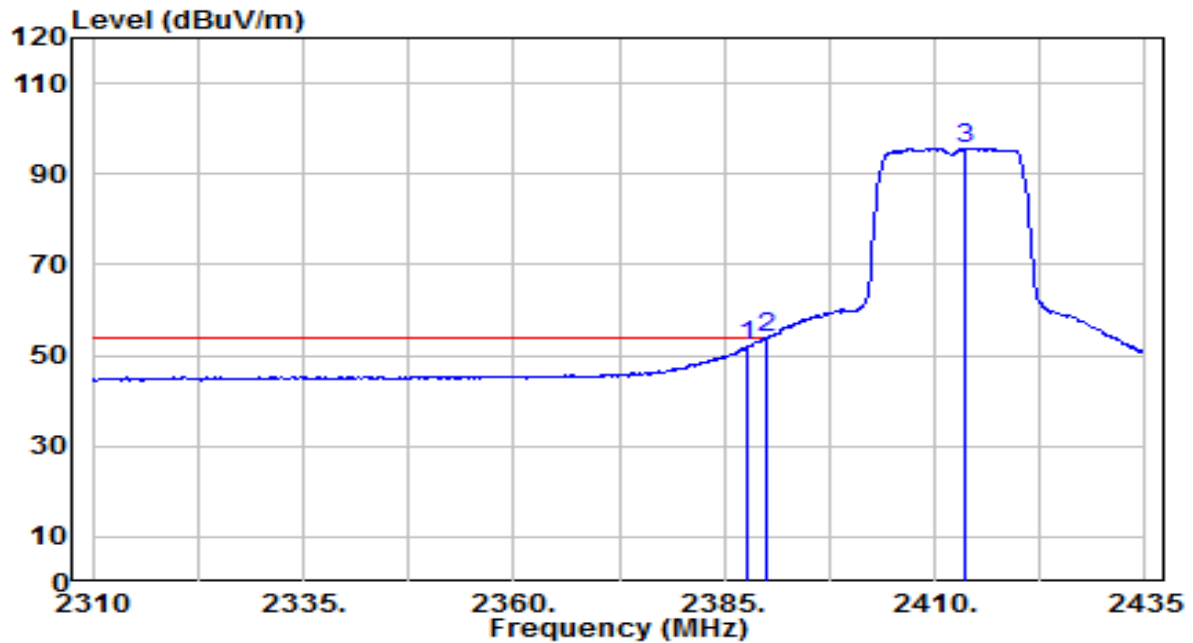


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.625	20.08	31.84	51.92	-2.08	54.00	155	315	Average
2	*	2390.000	21.86	31.85	53.71	-0.29	54.00	155	315	Average
3		2413.625	63.73	31.94	95.67	N/A	N/A	155	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 1	Test Voltage	AC 120V/60Hz

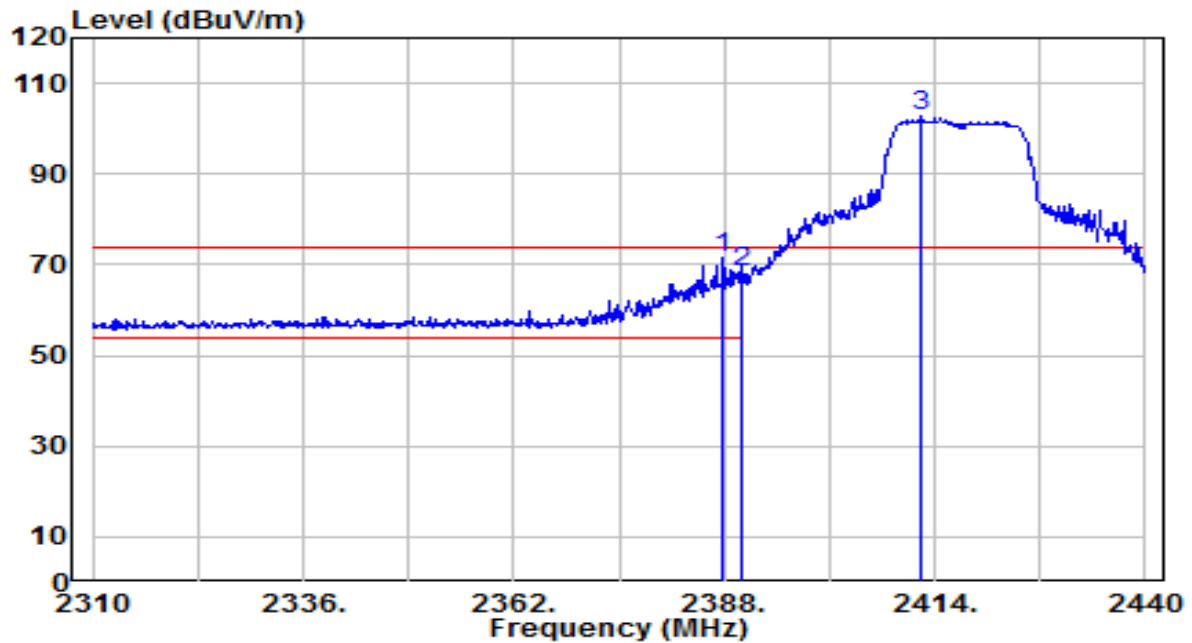


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.870	39.59	31.84	71.43	-2.57	74.00	280	35	Peak
2		2390.000	36.52	31.85	68.36	-5.64	74.00	280	35	Peak
3		2412.310	70.72	31.93	102.65	N/A	N/A	280	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 1	Test Voltage	AC 120V/60Hz

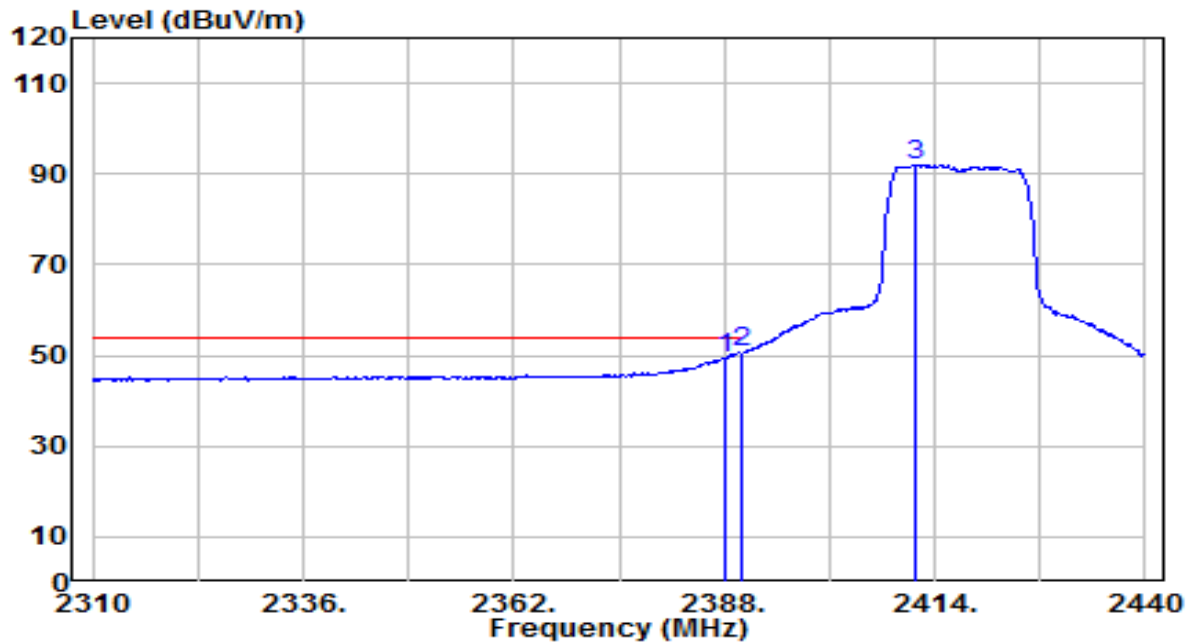


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	17.70	31.84	49.54	-4.46	54.00	280	35	Average
2	*	2390.000	18.70	31.85	50.55	-3.45	54.00	280	35	Average
3		2411.530	60.17	31.93	92.10	N/A	N/A	280	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 1	Test Voltage	AC 120V/60Hz

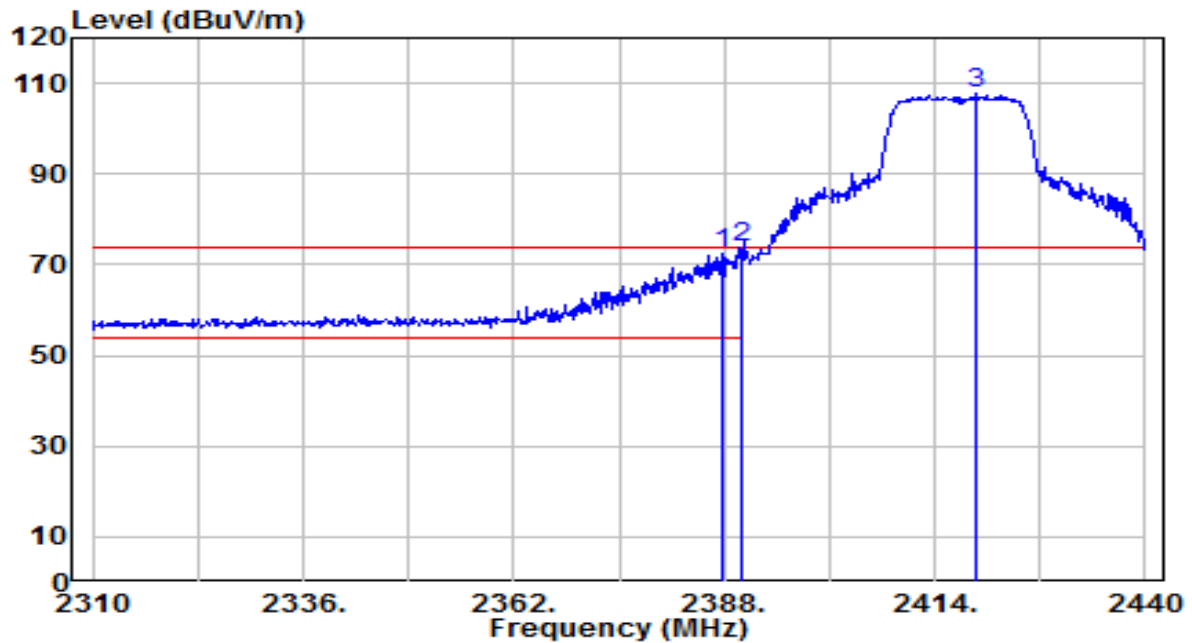


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.870	40.77	31.84	72.61	-1.39	74.00	155	315	Peak
2	*	2390.000	41.97	31.85	73.82	-0.18	74.00	155	315	Peak
3		2419.070	75.64	31.96	107.60	N/A	N/A	155	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 2_ANT 1	Test Voltage	AC 120V/60Hz

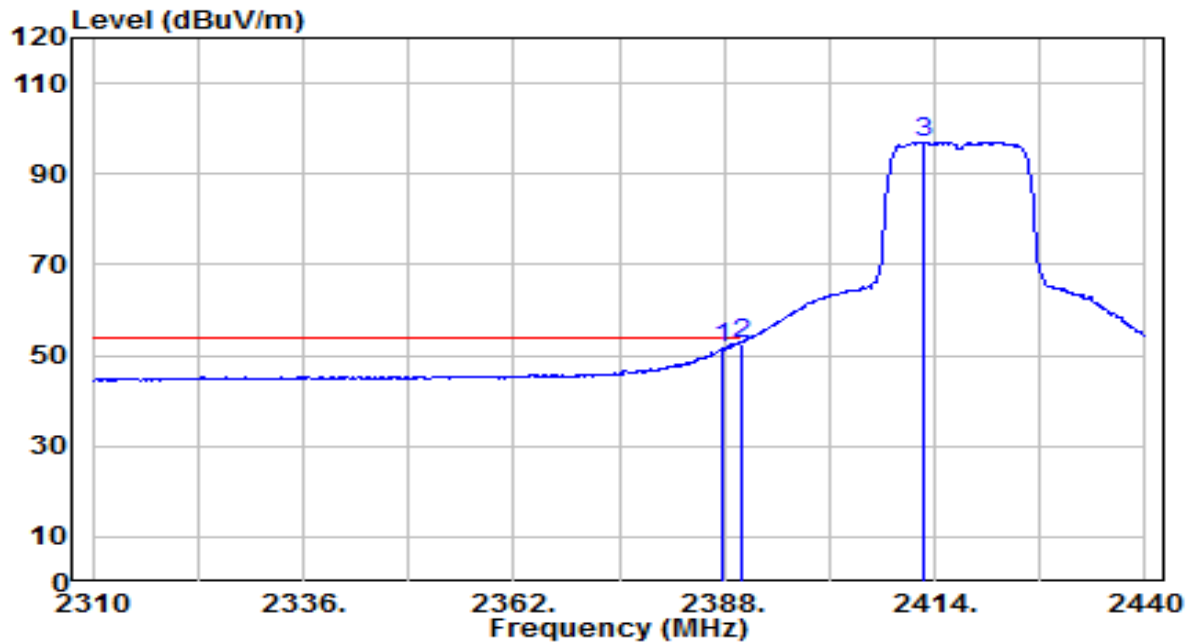


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.740	19.93	31.84	51.77	-2.23	54.00	155	315	Average
2	*	2390.000	20.80	31.85	52.65	-1.35	54.00	155	315	Average
3		2412.700	65.11	31.93	97.04	N/A	N/A	155	315	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

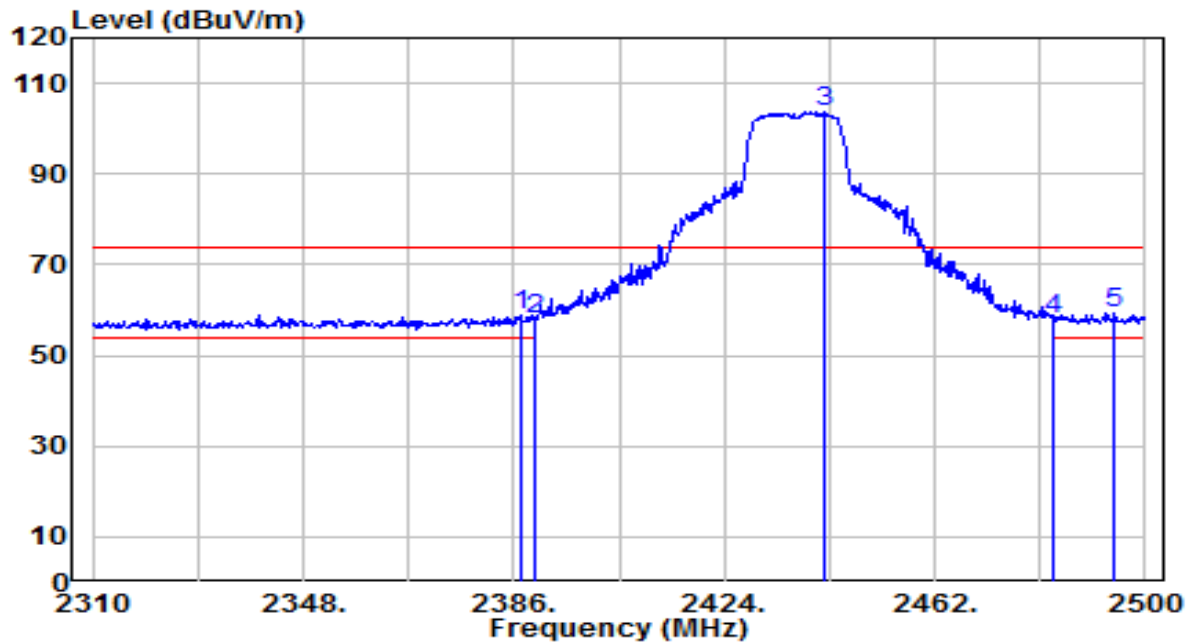


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.140	27.15	31.84	58.99	-15.01	74.00	200	35	Peak
2	2390.000	25.92	31.85	57.77	-16.23	74.00	200	35	Peak
3	2442.050	71.68	32.04	103.72	N/A	N/A	200	35	Peak
4	2483.500	25.93	32.20	58.13	-15.87	74.00	200	35	Peak
5	* 2494.490	27.20	32.24	59.44	-14.56	74.00	200	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

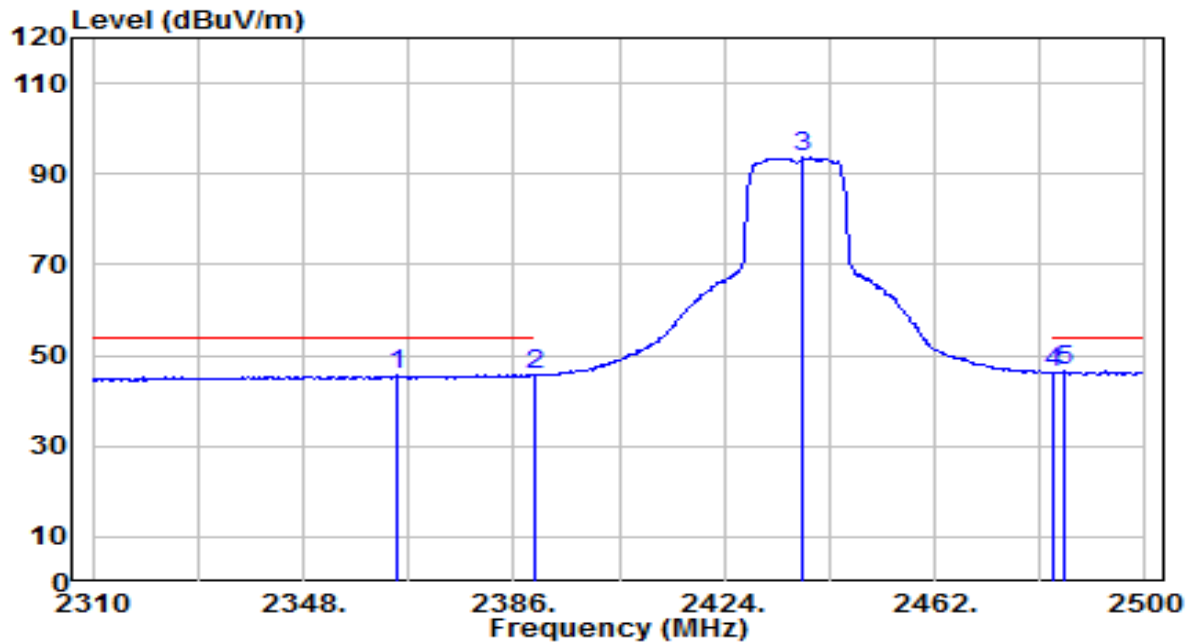


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2365.100	13.97	31.76	45.73	-8.27	54.00	200	35	Average
2	2390.000	13.76	31.85	45.61	-8.39	54.00	200	35	Average
3	2438.250	61.53	32.03	93.56	N/A	N/A	200	35	Average
4	2483.500	13.98	32.20	46.18	-7.82	54.00	200	35	Average
5	* 2485.370	14.23	32.21	46.44	-7.56	54.00	200	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

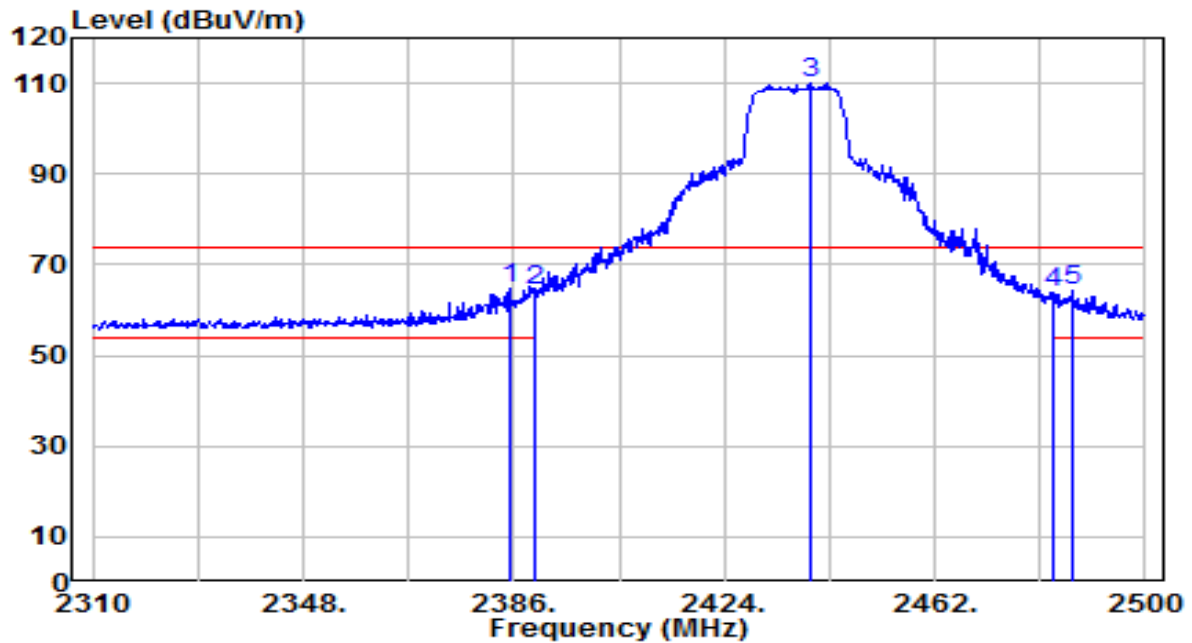


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.240	32.88	31.83	64.71	-9.29	74.00	150	315	Peak
2		2390.000	32.31	31.85	64.16	-9.84	74.00	150	315	Peak
3		2439.770	78.20	32.03	110.24	N/A	N/A	150	315	Peak
4		2483.500	31.47	32.20	63.67	-10.33	74.00	150	315	Peak
5		2486.700	31.90	32.21	64.11	-9.89	74.00	150	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

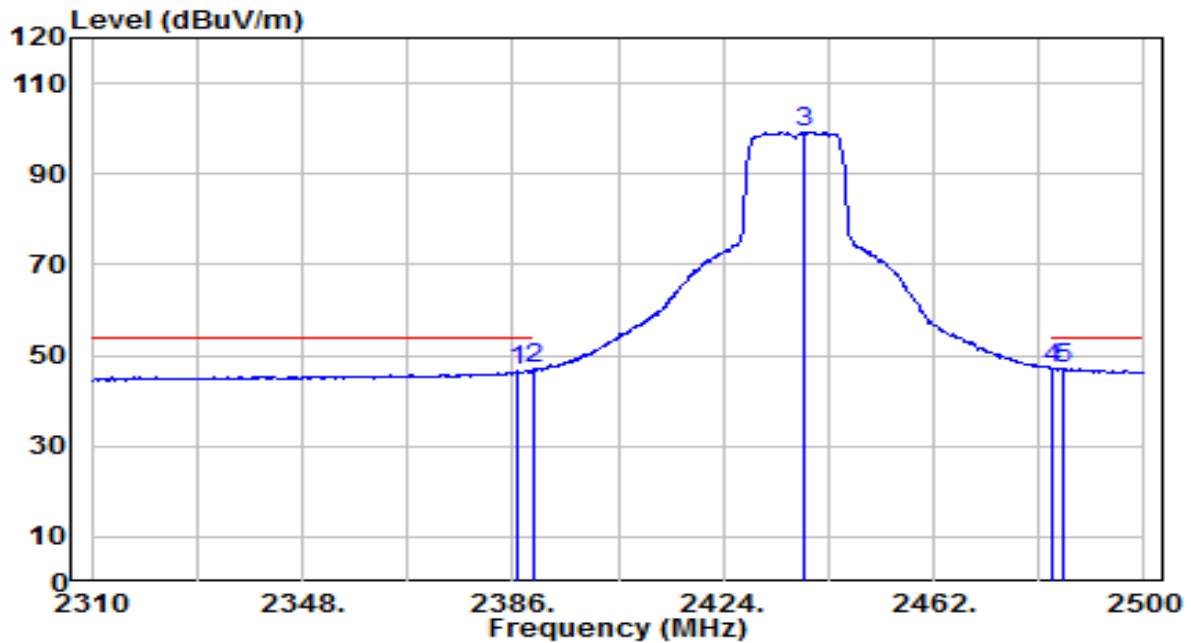


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.950	14.59	31.84	46.43	-7.57	54.00	150	315	Average
2	2390.000	15.05	31.85	46.90	-7.10	54.00	150	315	Average
3	2438.630	67.12	32.03	99.15	N/A	N/A	150	315	Average
4	* 2483.500	15.04	32.20	47.24	-6.76	54.00	150	315	Average
5	2485.370	14.97	32.21	47.17	-6.83	54.00	150	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 1	Test Voltage	AC 120V/60Hz

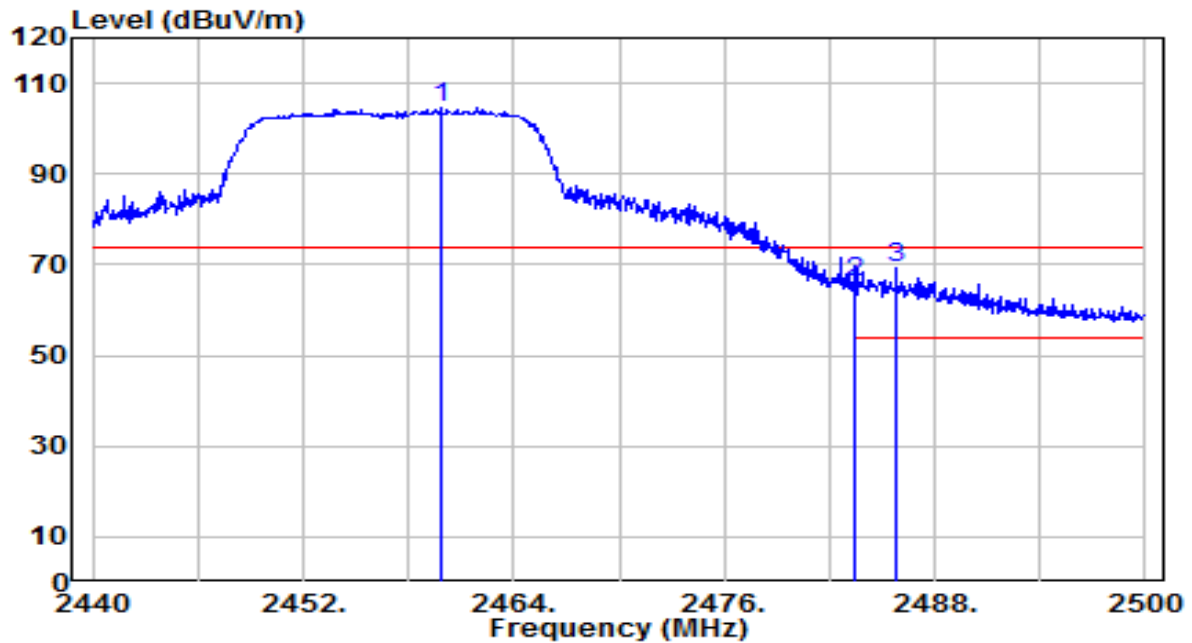


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.860	72.47	32.11	104.58	N/A	N/A	300	35	Peak
2	2483.500	34.11	32.20	66.31	-7.69	74.00	300	35	Peak
3	* 2485.780	37.03	32.21	69.23	-4.77	74.00	300	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 1	Test Voltage	AC 120V/60Hz

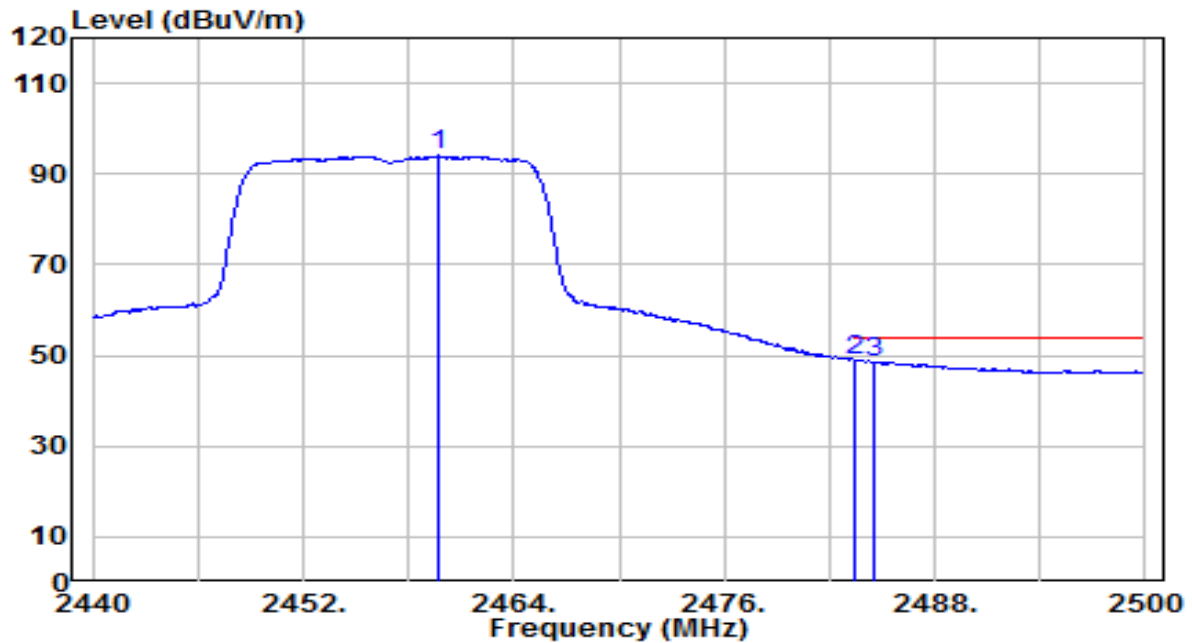


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.740	61.87	32.11	93.98	N/A	N/A	300	35	Average
2	*	2483.500	16.65	32.20	48.85	-5.15	54.00	300	35	Average
3		2484.580	16.44	32.20	48.64	-5.36	54.00	300	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 1	Test Voltage	AC 120V/60Hz

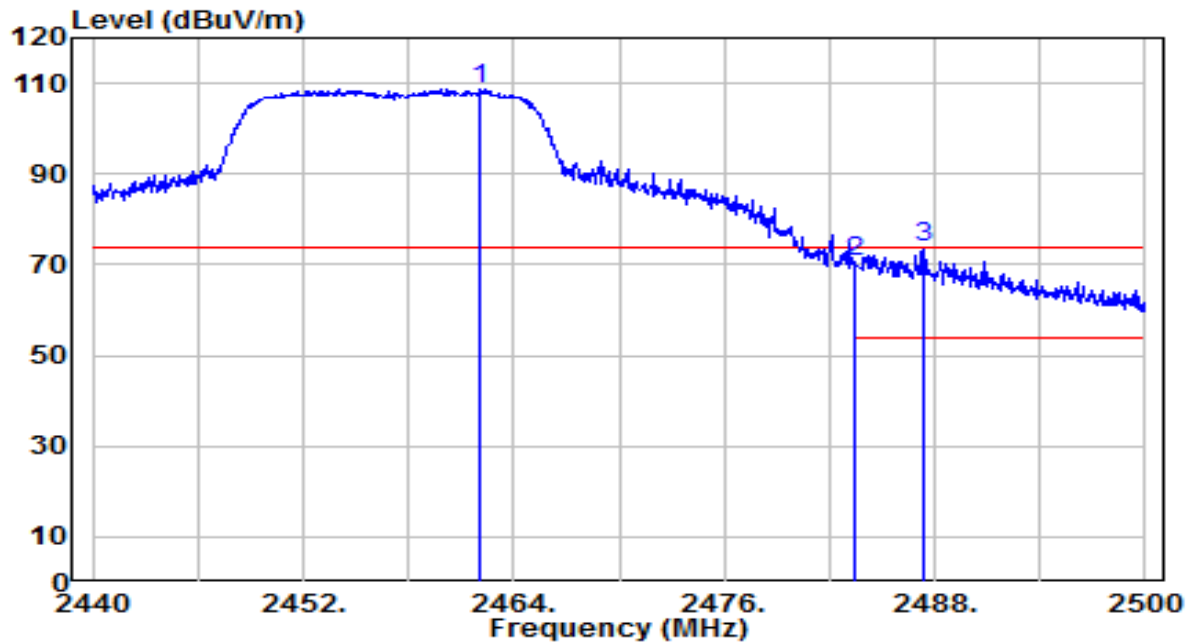


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2462.140	76.59	32.12	108.71	N/A	N/A	145	315	Peak
2	2483.500	38.29	32.20	70.49	-3.51	74.00	145	315	Peak
3	* 2487.400	41.59	32.21	73.80	-0.20	74.00	145	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 10_ANT 1	Test Voltage	AC 120V/60Hz

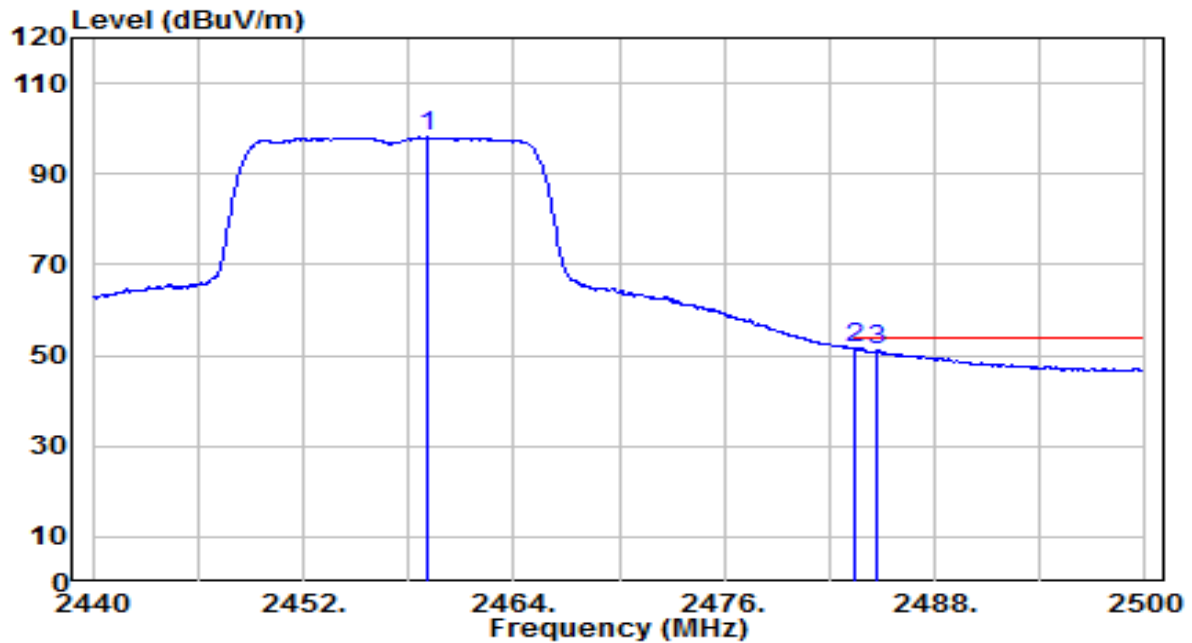


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.020	66.00	32.11	98.11	N/A	N/A	145	315	Average
2	*	2483.500	19.23	32.20	51.43	-2.57	54.00	145	315	Average
3		2484.760	18.90	32.20	51.10	-2.90	54.00	145	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

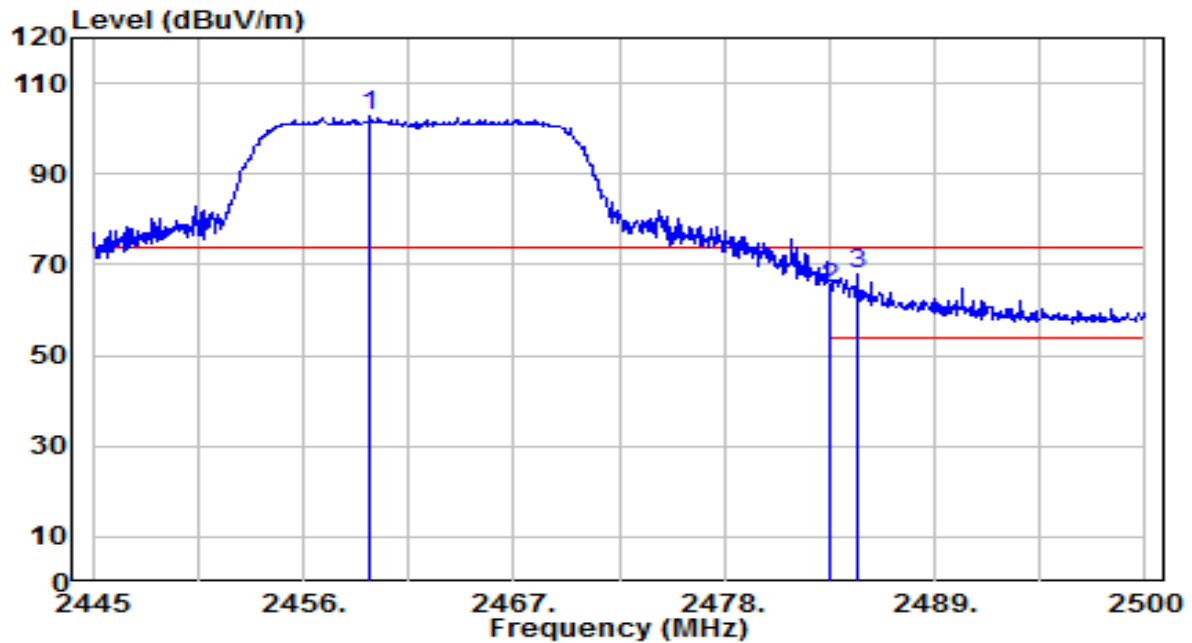


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2459.465	70.65	32.11	102.76	N/A	N/A	300	35	Peak
2	2483.500	32.65	32.20	64.84	-9.16	74.00	300	35	Peak
3	* 2484.930	35.54	32.20	67.74	-6.26	74.00	300	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

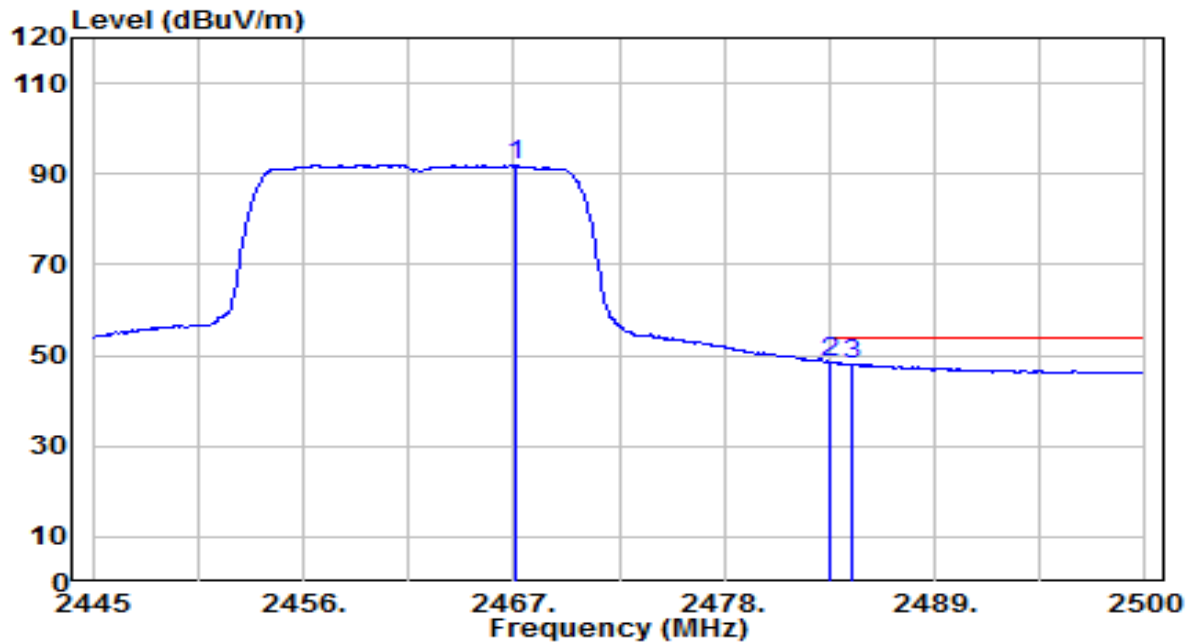


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2467.165	59.87	32.14	92.01	N/A	N/A	300	35	Average
2	*	2483.500	16.39	32.20	48.59	-5.41	54.00	300	35	Average
3		2484.655	15.94	32.20	48.14	-5.86	54.00	300	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

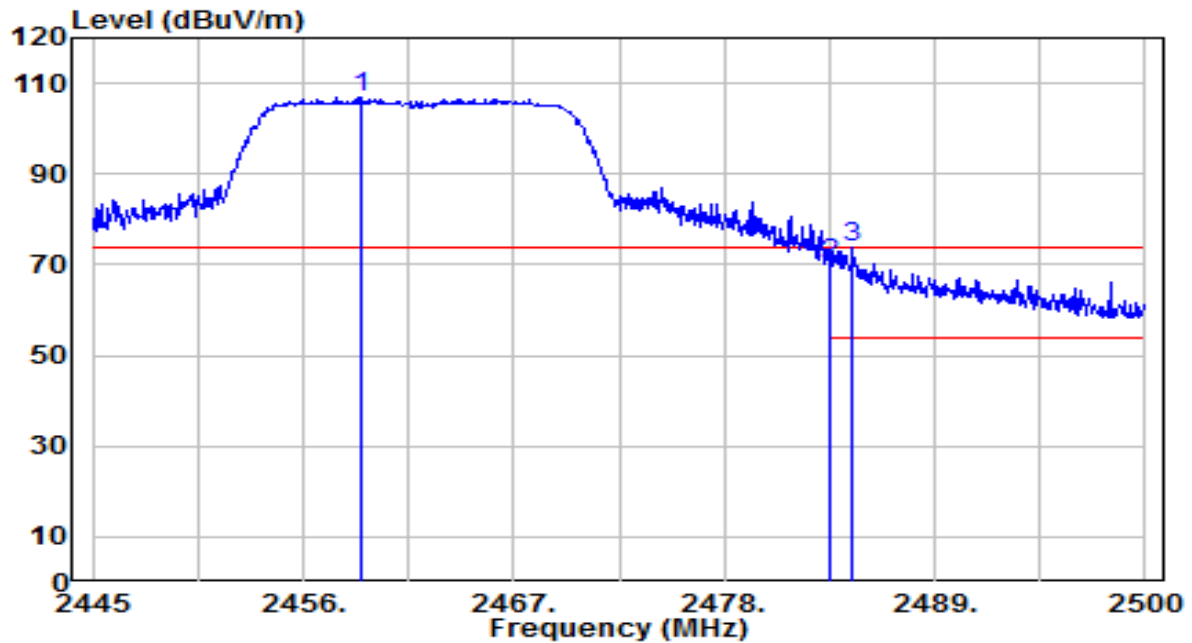


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.970	74.71	32.11	106.82	N/A	N/A	145	315	Peak
2	2483.500	38.21	32.20	70.40	-3.60	74.00	145	315	Peak
3	* 2484.710	41.57	32.20	73.77	-0.23	74.00	145	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11g_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

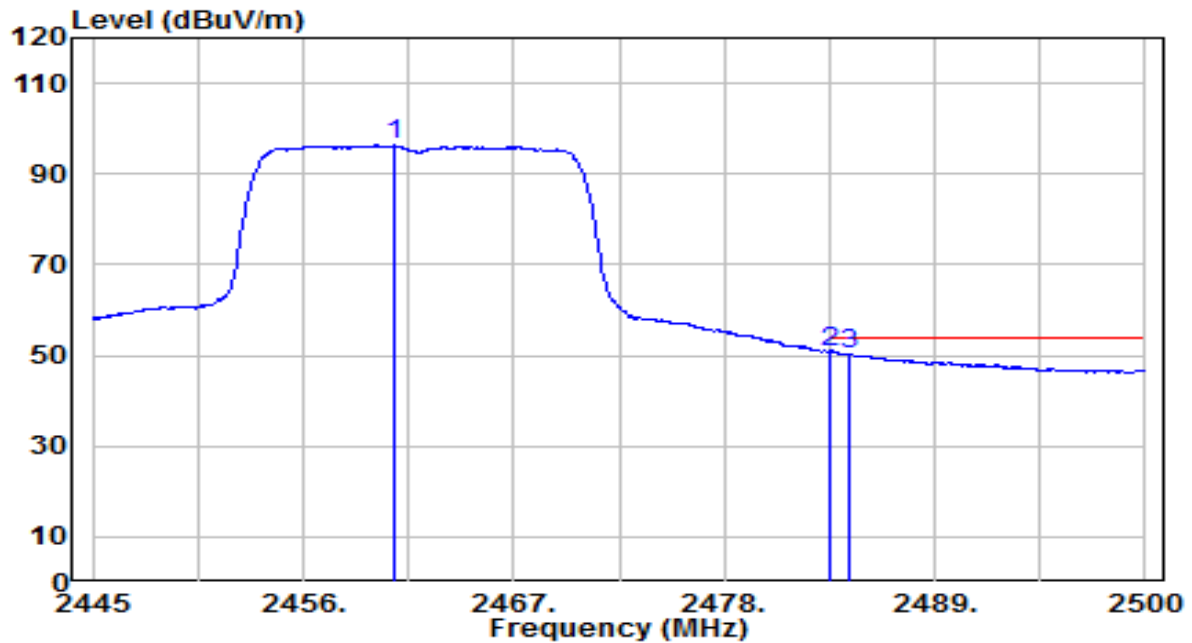


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.730	64.17	32.11	96.28	N/A	N/A	145	315	Average
2	*	2483.500	18.71	32.20	50.90	-3.10	54.00	145	315	Average
3		2484.600	17.98	32.20	50.19	-3.81	54.00	145	315	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

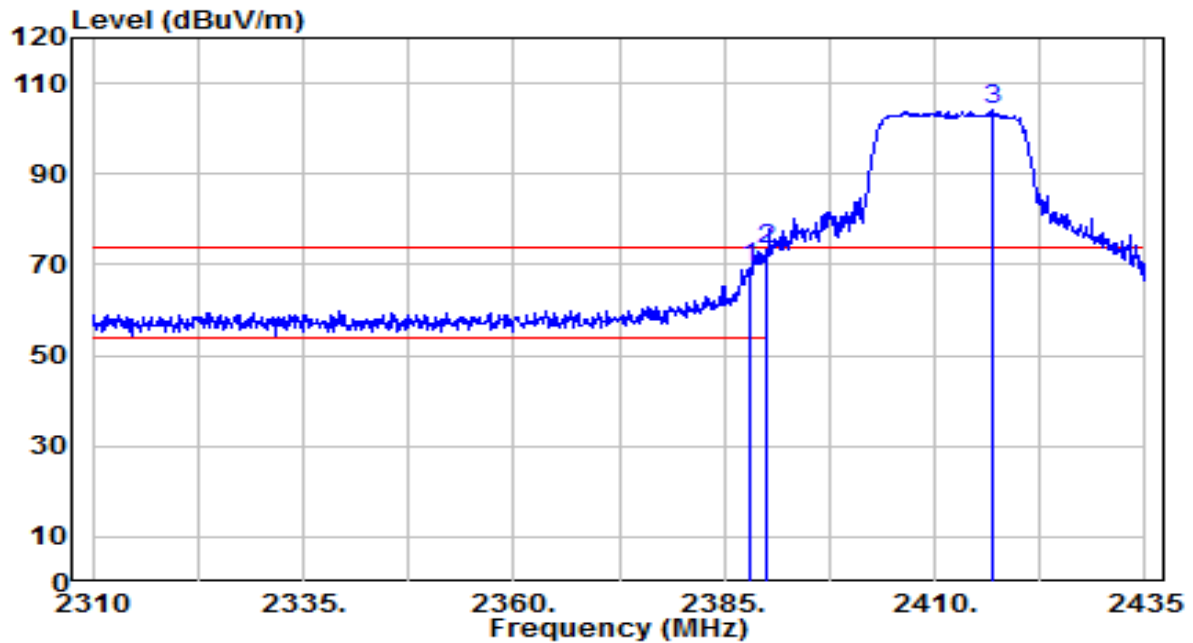


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	37.46	31.84	69.30	-4.70	74.00	195	275	Peak
2	*	2390.000	41.47	31.85	73.32	-0.68	74.00	195	275	Peak
3		2417.000	72.02	31.95	103.97	N/A	N/A	195	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

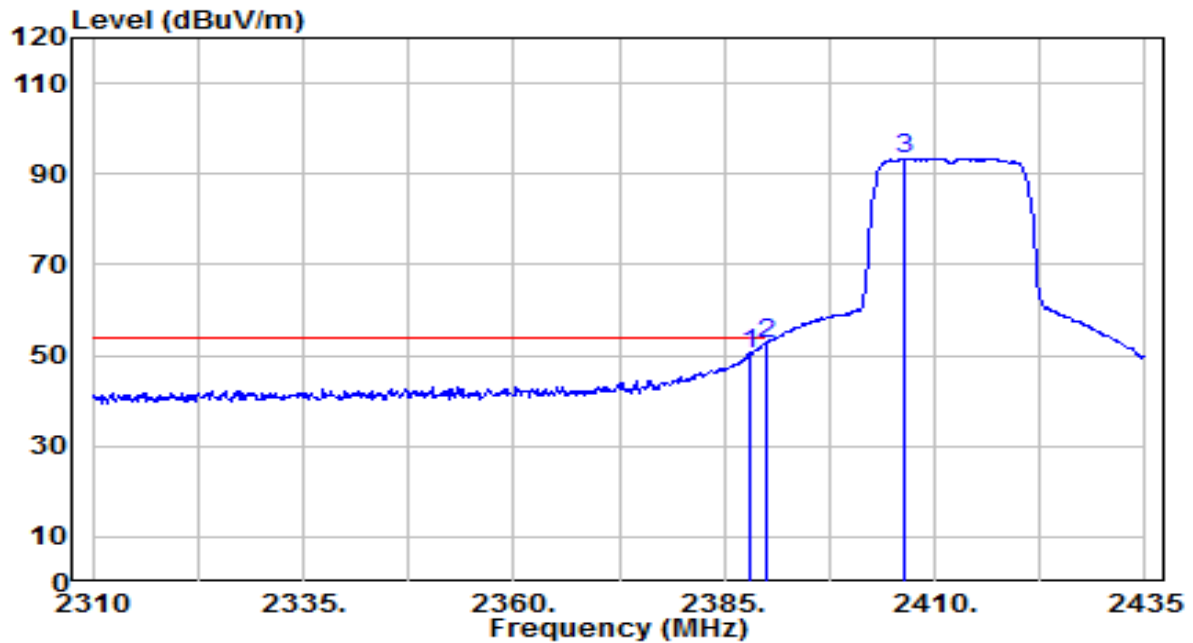


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	18.36	31.84	50.20	-3.80	54.00	195	275	Average
2	*	2390.000	20.78	31.85	52.63	-1.37	54.00	195	275	Average
3		2406.375	61.53	31.91	93.44	N/A	N/A	195	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

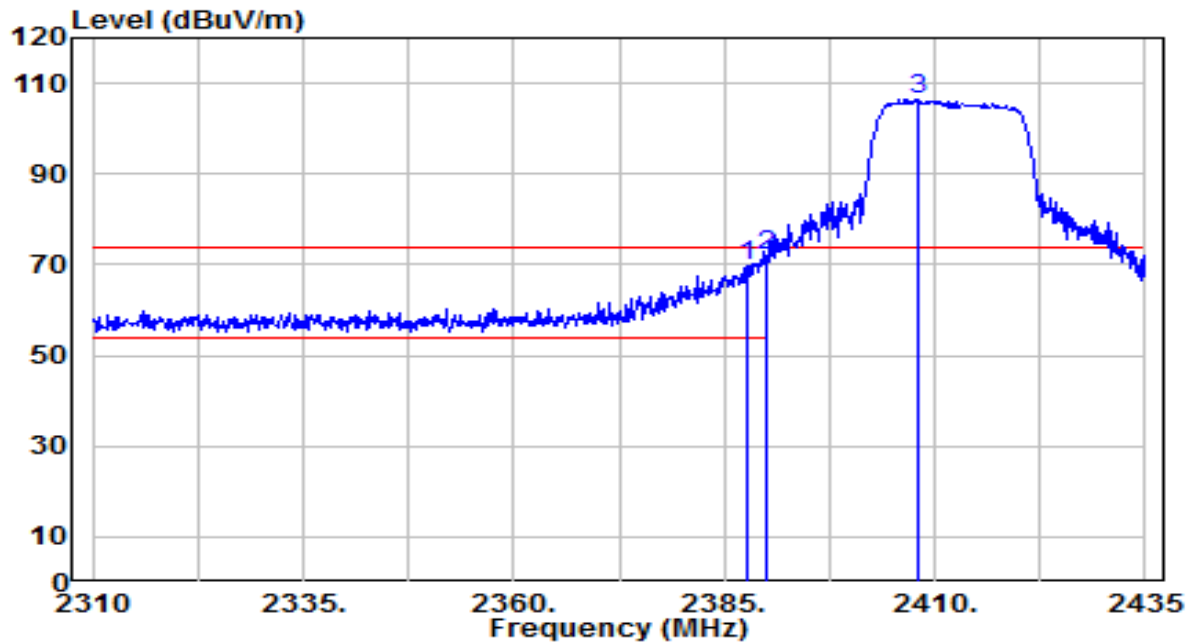


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.750	38.12	31.84	69.96	-4.04	74.00	170	155	Peak
2	*	2390.000	40.20	31.85	72.05	-1.95	74.00	170	155	Peak
3		2408.000	74.63	31.92	106.55	N/A	N/A	170	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 0	Test Voltage	AC 120V/60Hz

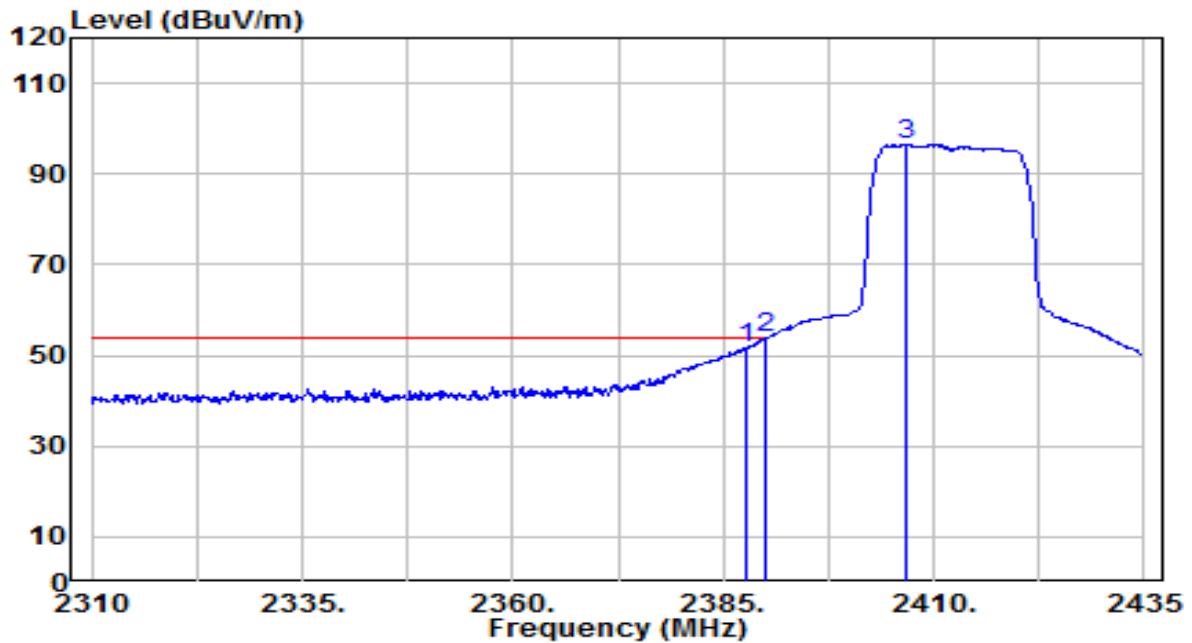


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	19.92	31.84	51.76	-2.24	54.00	170	155	Average
2	*	2390.000	21.94	31.85	53.79	-0.21	54.00	170	155	Average
3		2406.625	64.59	31.91	96.50	N/A	N/A	170	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0	Test Voltage	AC 120V/60Hz

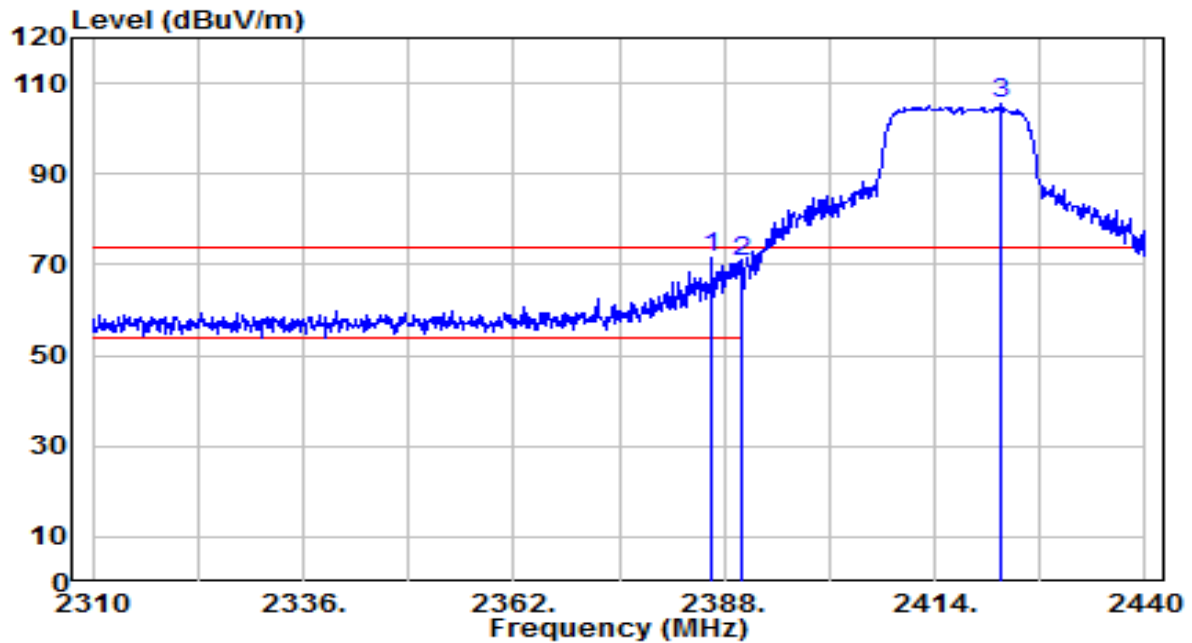


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.570	39.68	31.84	71.52	-2.48	74.00	195	275	Peak
2		2390.000	38.93	31.85	70.78	-3.22	74.00	195	275	Peak
3		2422.320	73.50	31.97	105.47	N/A	N/A	195	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0	Test Voltage	AC 120V/60Hz

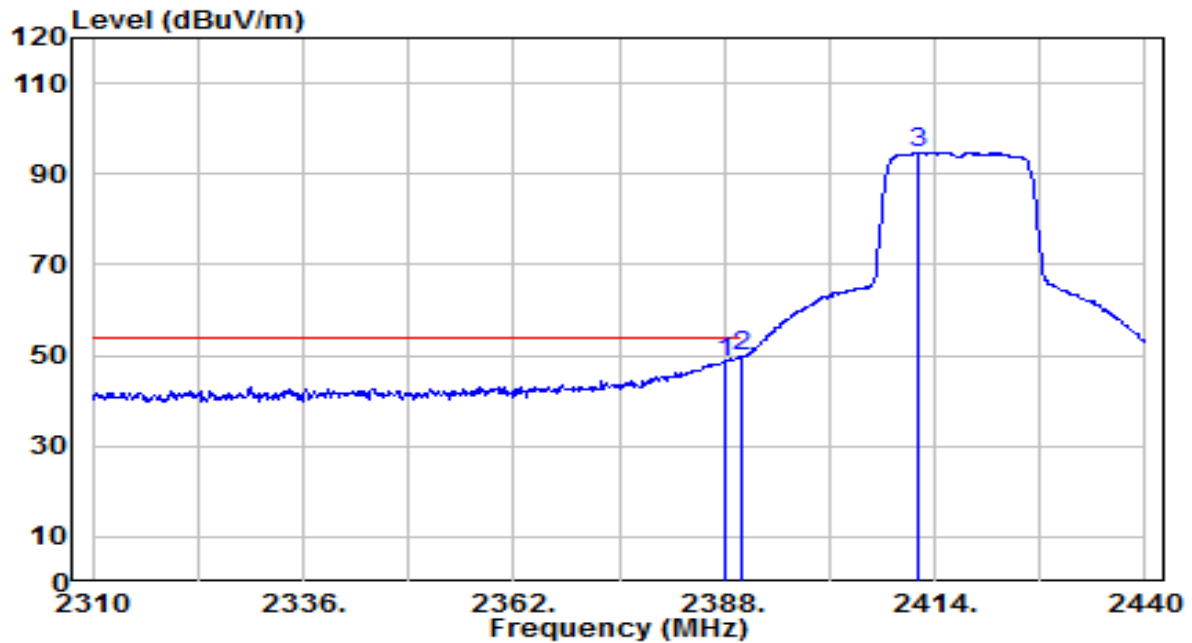


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	16.82	31.84	48.66	-5.34	54.00	195	275	Average
2	*	2390.000	17.81	31.85	49.66	-4.34	54.00	195	275	Average
3		2411.920	62.92	31.93	94.85	N/A	N/A	195	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0	Test Voltage	AC 120V/60Hz

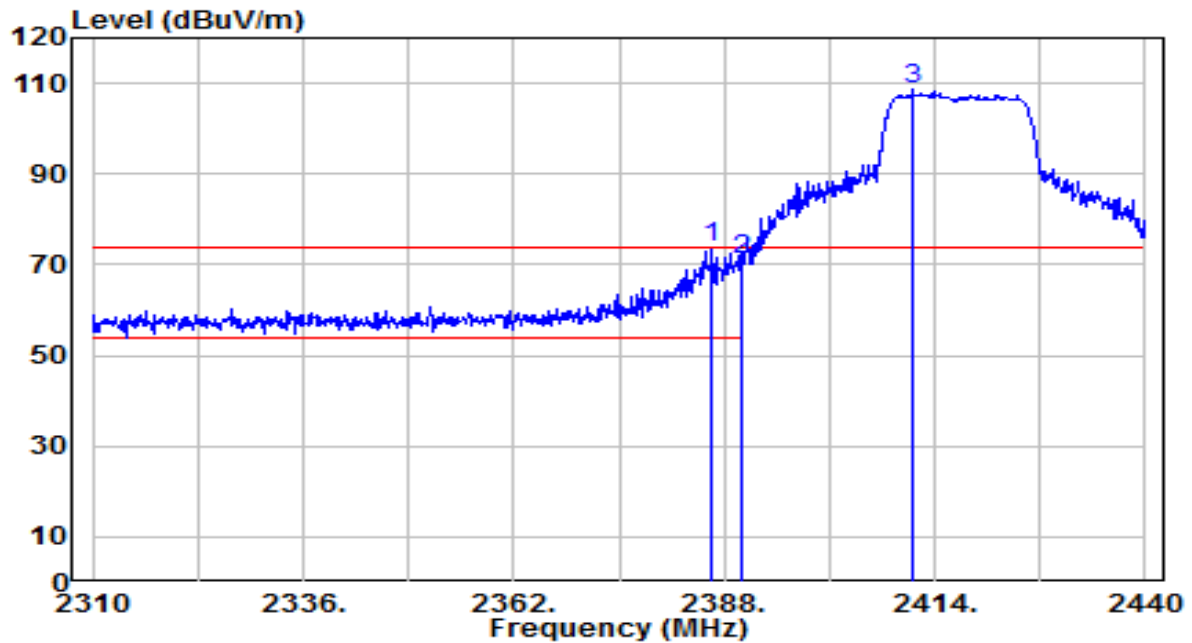


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.440	41.86	31.84	73.70	-0.30	74.00	170	155	Peak
2		2390.000	39.13	31.85	70.98	-3.02	74.00	170	155	Peak
3		2411.270	76.66	31.93	108.59	N/A	N/A	170	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 0	Test Voltage	AC 120V/60Hz

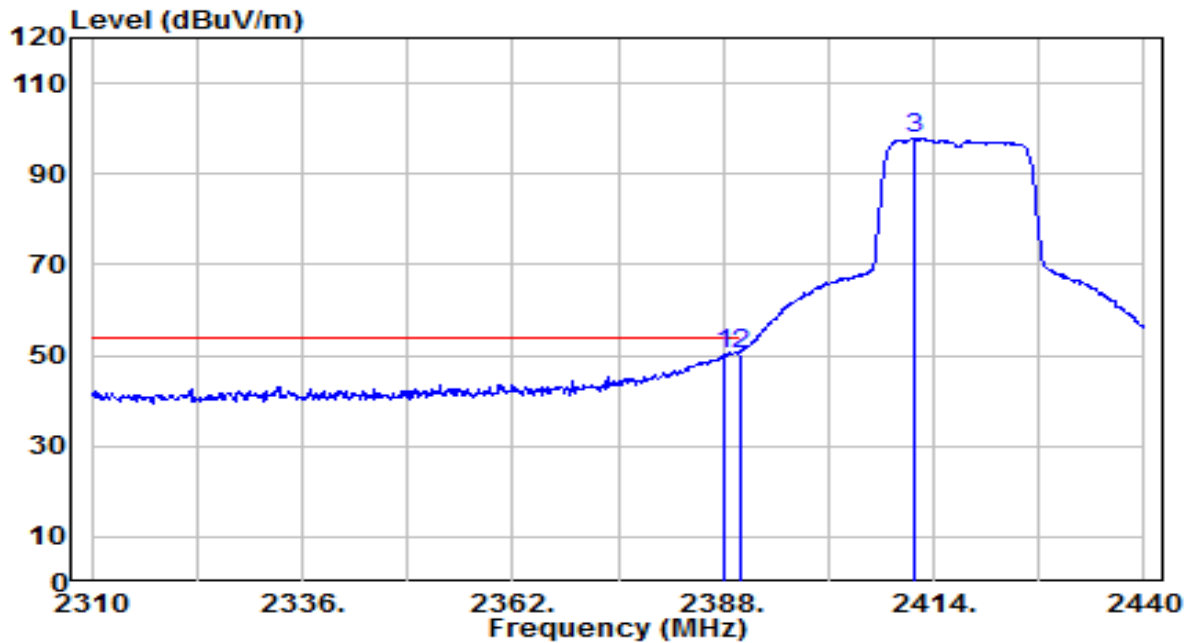


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	18.39	31.84	50.23	-3.77	54.00	170	155	Average
2	*	2390.000	18.62	31.85	50.47	-3.53	54.00	170	155	Average
3		2411.660	65.84	31.93	97.77	N/A	N/A	170	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

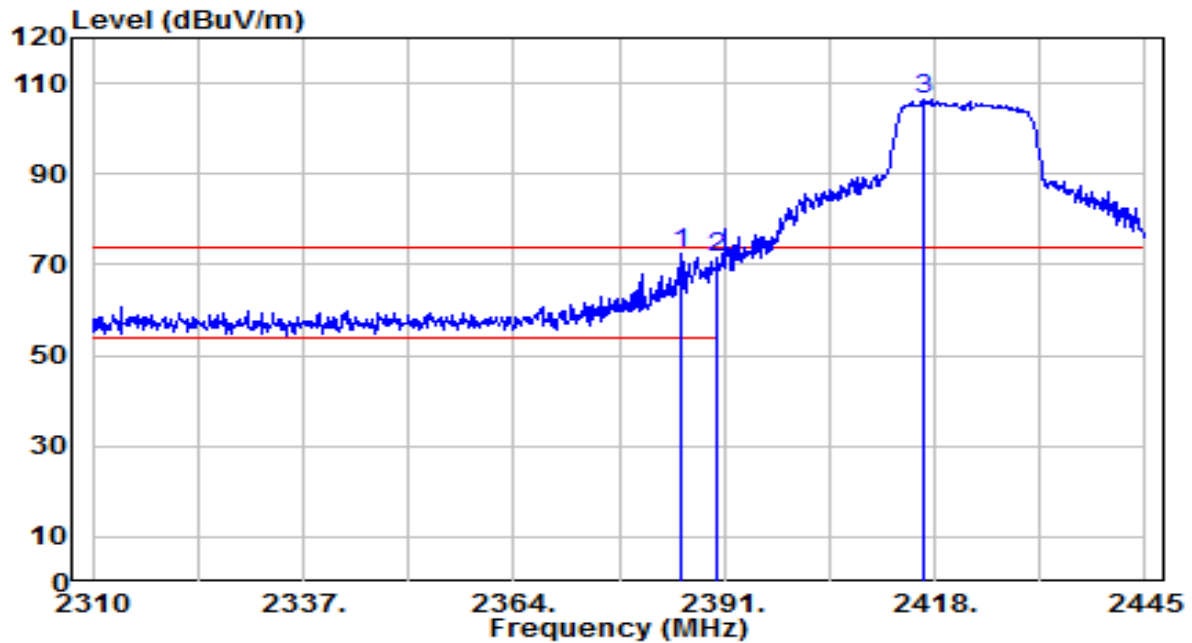


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2385.600	40.76	31.83	72.59	-1.41	74.00	195	275	Peak
2		2390.000	39.54	31.85	71.39	-2.61	74.00	195	275	Peak
3		2416.515	74.35	31.95	106.30	N/A	N/A	195	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

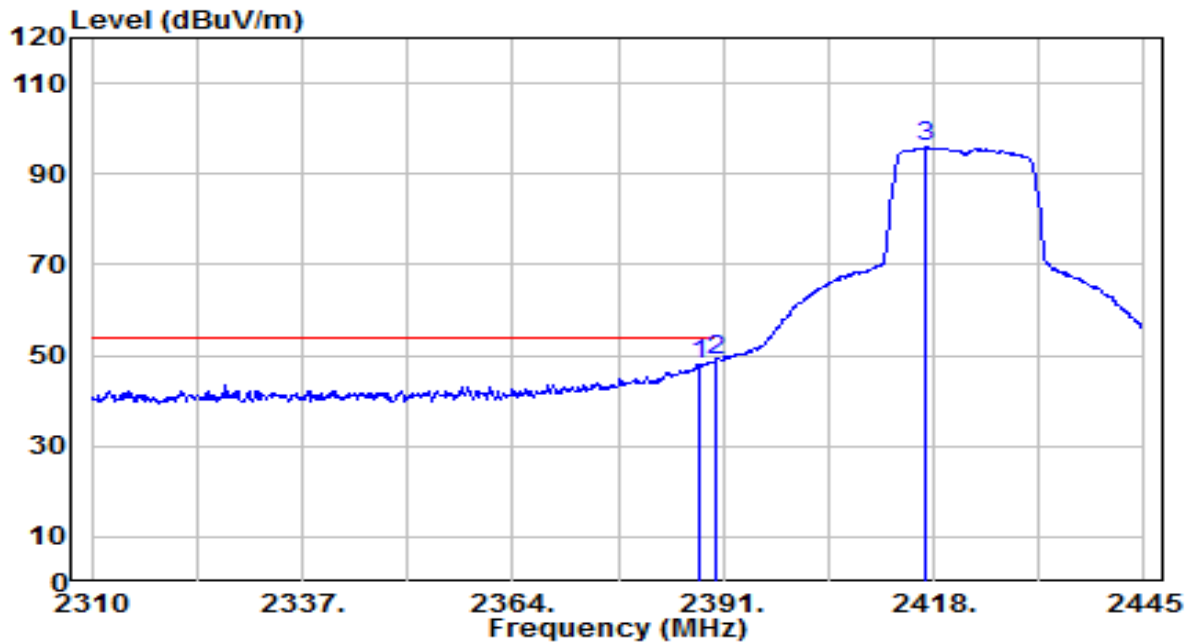


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.895	16.16	31.84	48.00	-6.00	54.00	195	275	Average
2	*	2390.000	17.25	31.85	49.10	-4.90	54.00	195	275	Average
3		2417.055	63.93	31.95	95.88	N/A	N/A	195	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

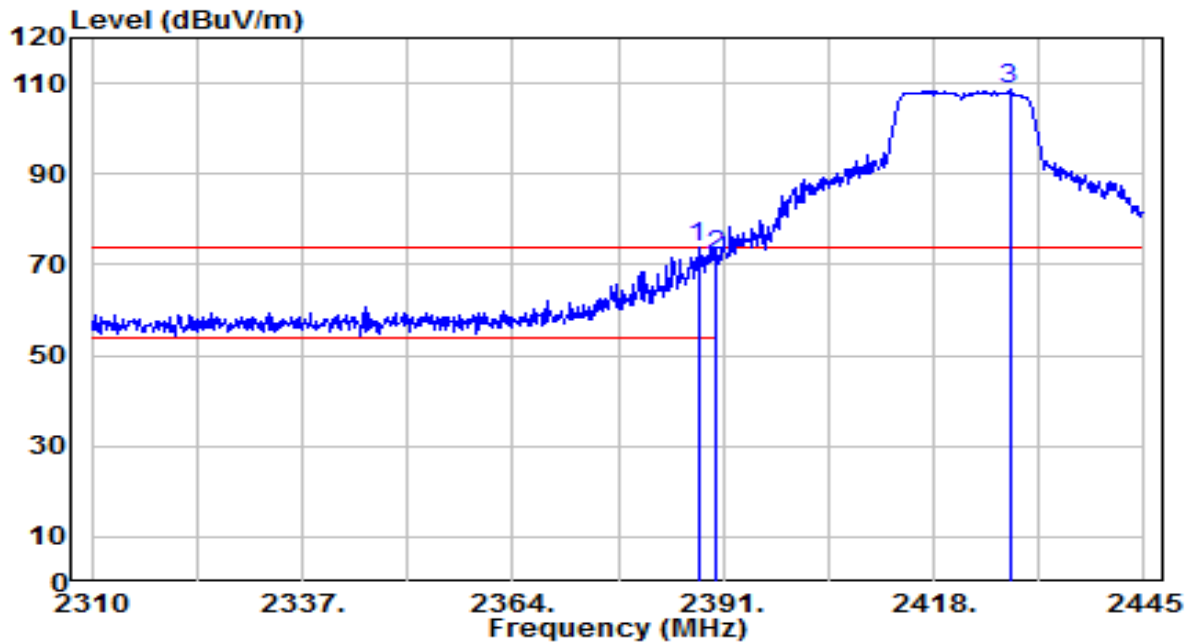


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.760	41.90	31.84	73.74	-0.26	74.00	170	155	Peak
2		2390.000	40.30	31.85	72.15	-1.85	74.00	170	155	Peak
3		2427.720	76.47	31.99	108.46	N/A	N/A	170	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 3_ANT 0	Test Voltage	AC 120V/60Hz

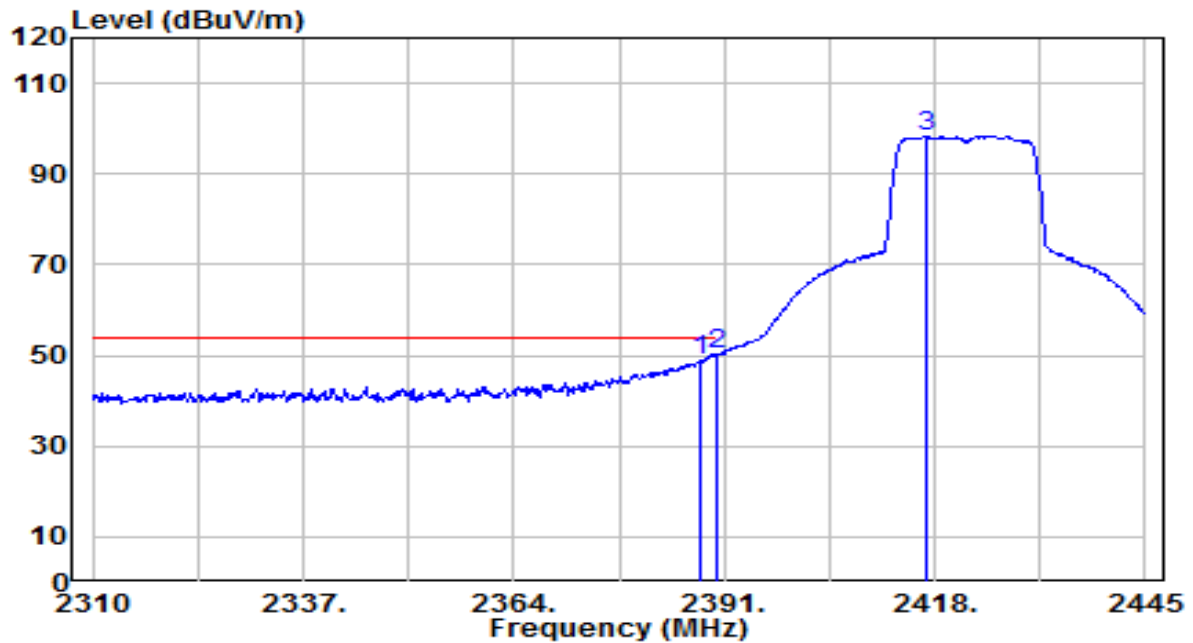


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.895	17.03	31.84	48.87	-5.13	54.00	170	155	Average
2	*	2390.000	18.19	31.85	50.04	-3.96	54.00	170	155	Average
3		2417.055	66.37	31.95	98.32	N/A	N/A	170	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

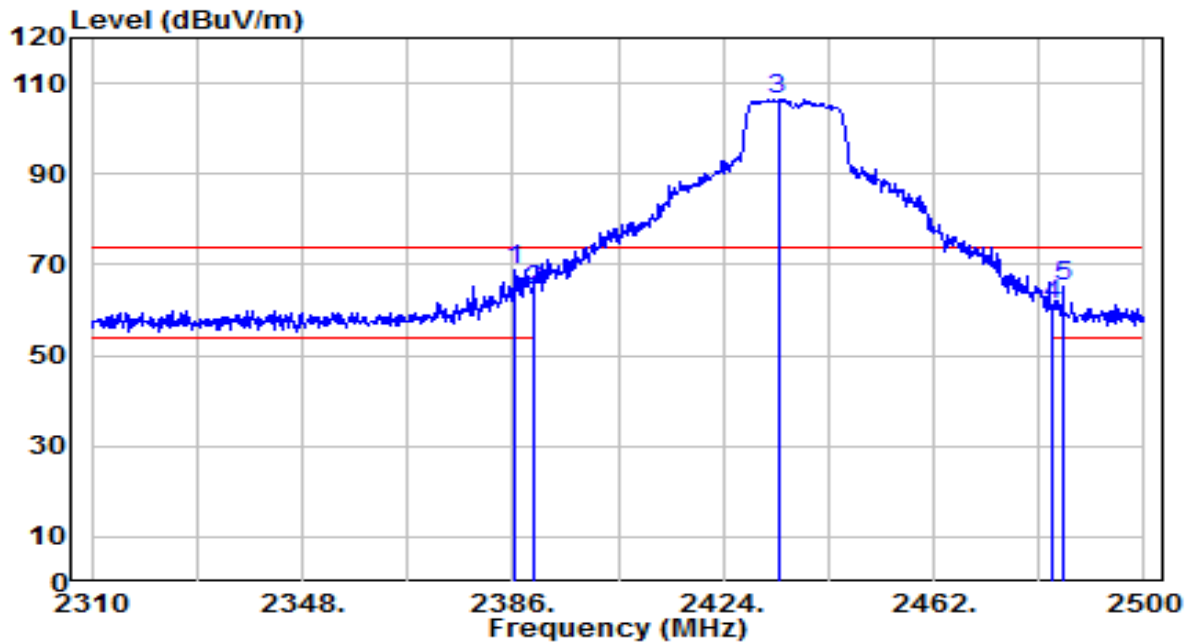


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.570	36.99	31.84	68.83	-5.17	74.00	145	275	Peak
2		2390.000	32.36	31.85	64.21	-9.79	74.00	145	275	Peak
3		2433.880	74.29	32.01	106.30	N/A	N/A	145	275	Peak
4		2483.500	29.08	32.20	61.28	-12.72	74.00	145	275	Peak
5		2485.370	33.14	32.21	65.34	-8.66	74.00	145	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

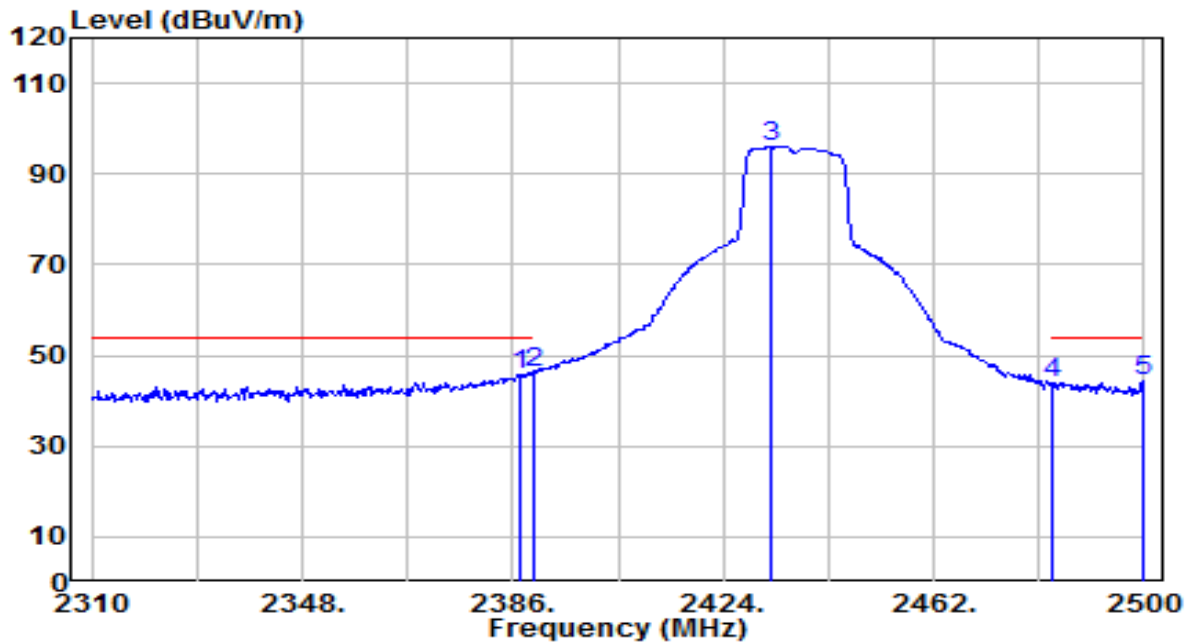


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.520	13.99	31.84	45.83	-8.17	54.00	145	275	Average
2	*	2390.000	14.55	31.85	46.40	-7.60	54.00	145	275	Average
3		2432.550	64.19	32.01	96.20	N/A	N/A	145	275	Average
4		2483.500	11.63	32.20	43.83	-10.17	54.00	145	275	Average
5		2499.620	12.25	32.26	44.51	-9.49	54.00	145	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

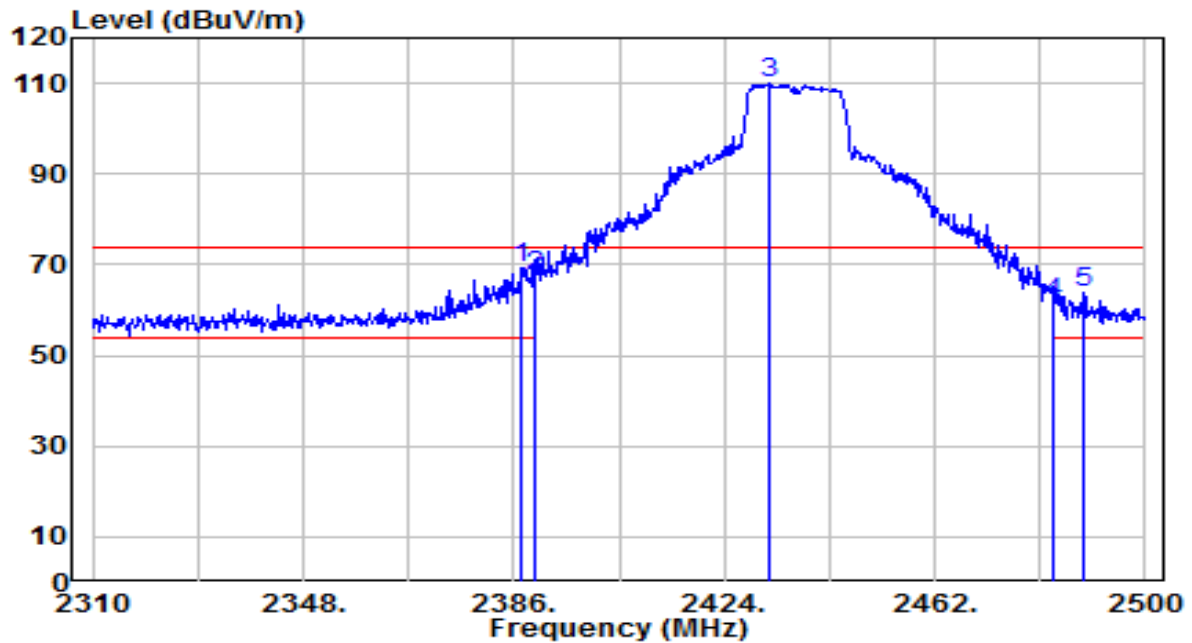


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.520	37.65	31.84	69.49	-4.51	74.00	190	160	Peak
2		2390.000	35.74	31.85	67.59	-6.41	74.00	190	160	Peak
3		2432.360	77.85	32.01	109.85	N/A	N/A	190	160	Peak
4		2483.500	29.22	32.20	61.42	-12.58	74.00	190	160	Peak
5		2488.790	31.54	32.22	63.76	-10.24	74.00	190	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 0	Test Voltage	AC 120V/60Hz

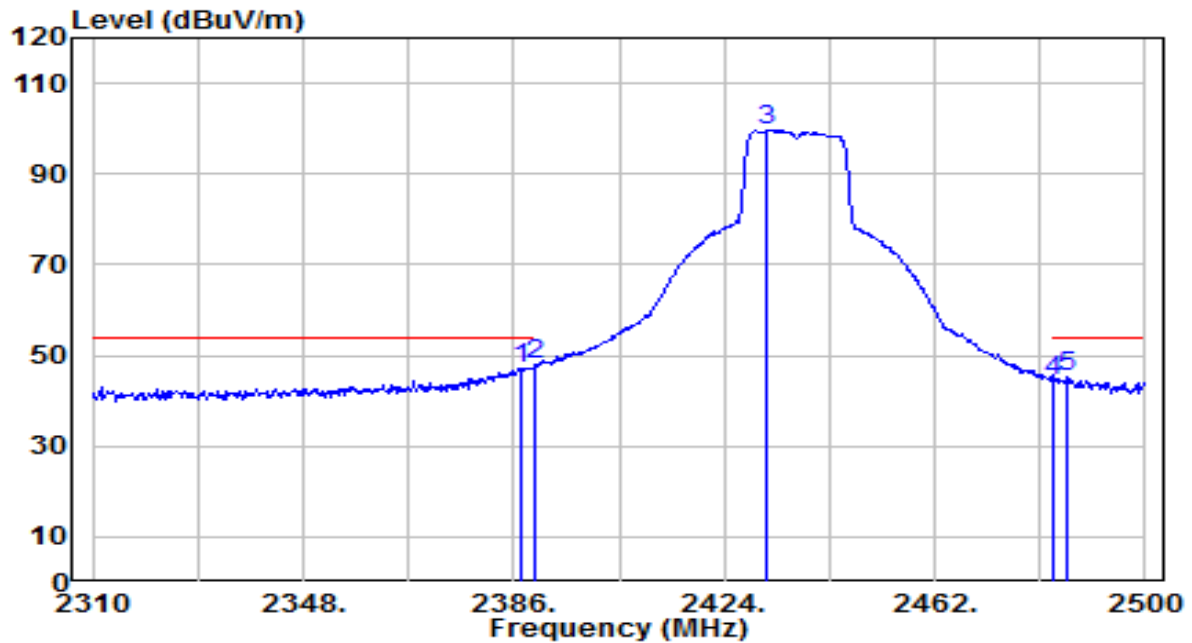


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.520	15.46	31.84	47.30	-6.70	54.00	190	160	Average
2	*	2390.000	15.95	31.85	47.80	-6.20	54.00	190	160	Average
3		2431.600	67.57	32.00	99.57	N/A	N/A	190	160	Average
4		2483.500	12.12	32.20	44.32	-9.68	54.00	190	160	Average
5		2485.940	13.02	32.21	45.23	-8.77	54.00	190	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0	Test Voltage	AC 120V/60Hz

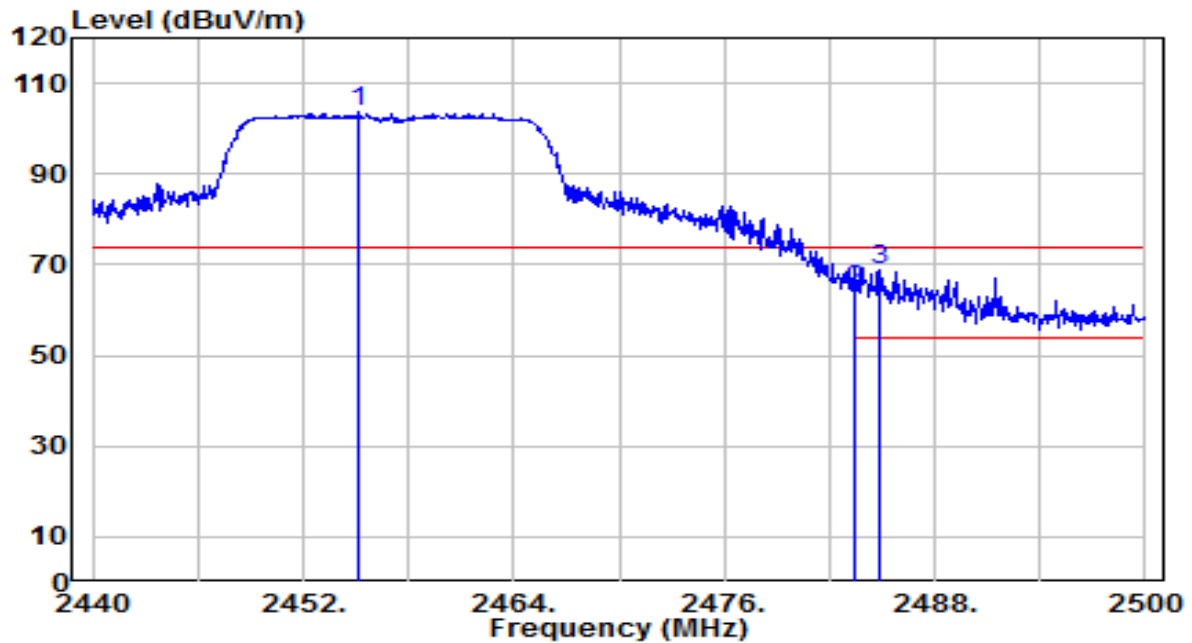


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.180	71.64	32.09	103.74	N/A	N/A	190	275	Peak
2		2483.500	32.33	32.20	64.53	-9.47	74.00	190	275	Peak
3	*	2484.880	36.85	32.20	69.05	-4.95	74.00	190	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0	Test Voltage	AC 120V/60Hz

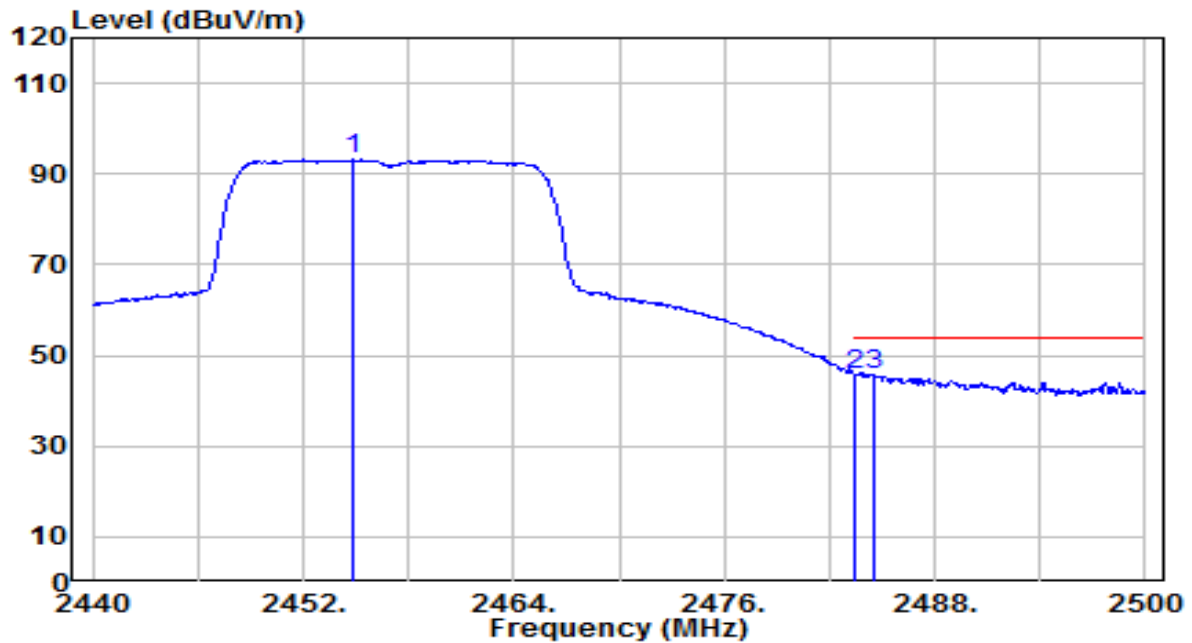


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.820	61.04	32.09	93.13	N/A	N/A	190	275	Average
2	*	2483.500	13.67	32.20	45.87	-8.13	54.00	190	275	Average
3		2484.520	13.43	32.20	45.63	-8.37	54.00	190	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0	Test Voltage	AC 120V/60Hz

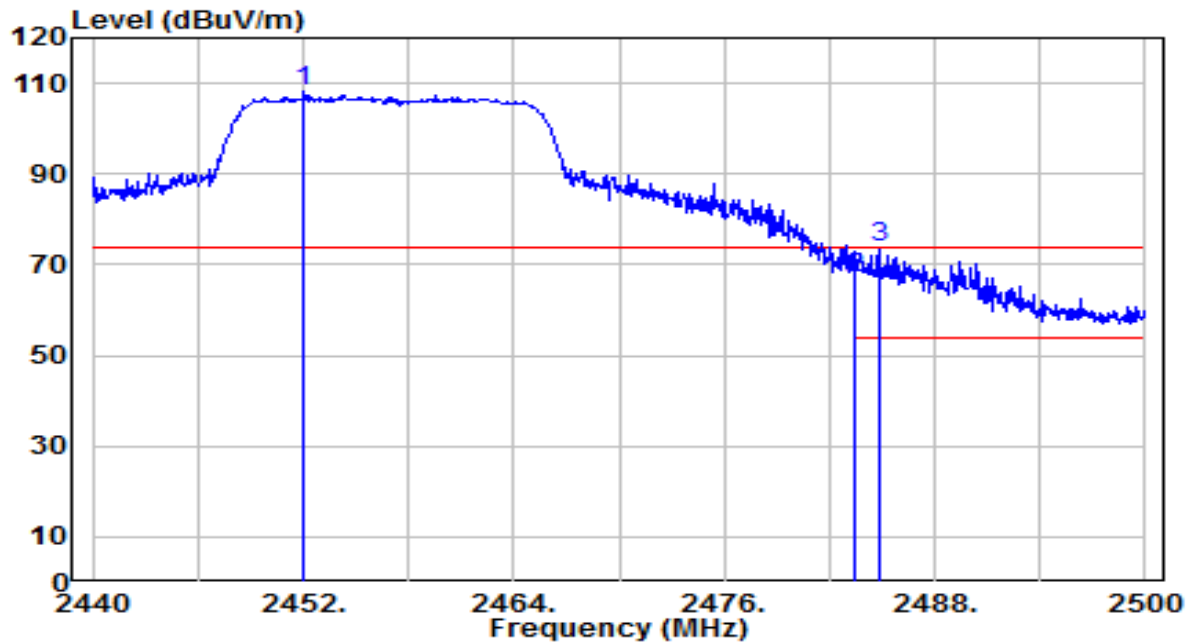


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2452.060	75.98	32.08	108.06	N/A	N/A	170	160	Peak
2	2483.500	35.01	32.20	67.21	-6.79	74.00	170	160	Peak
3	* 2484.880	41.59	32.20	73.79	-0.21	74.00	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 0	Test Voltage	AC 120V/60Hz

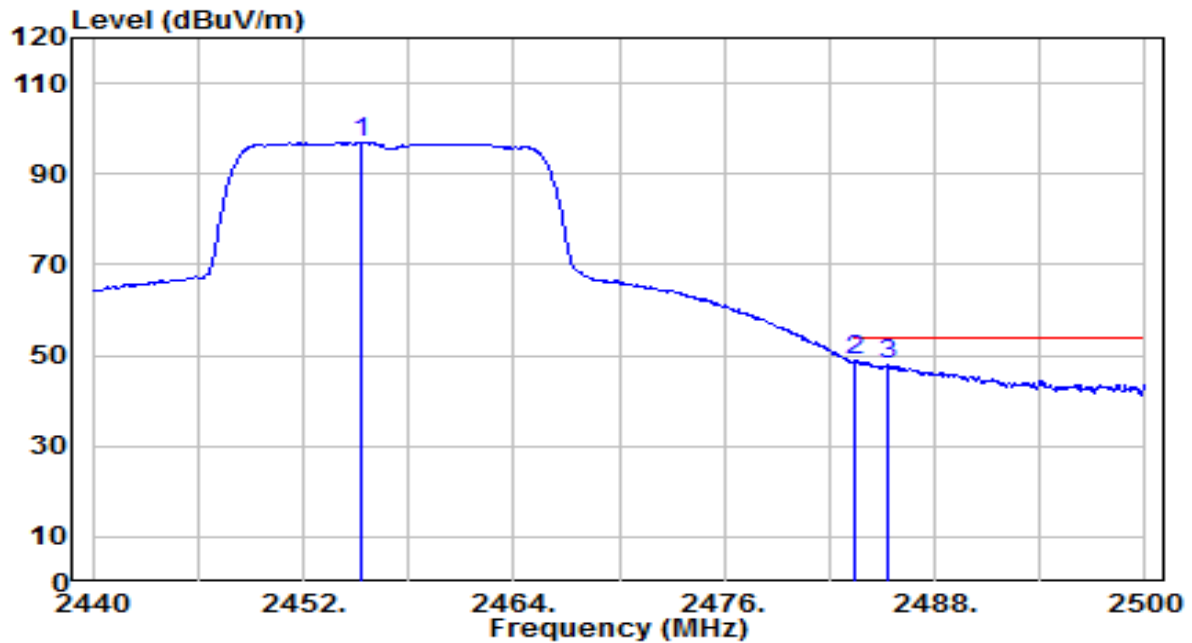


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2455.240	64.81	32.09	96.91	N/A	N/A	170	160	Average
2	*	2483.500	16.75	32.20	48.95	-5.05	54.00	170	160	Average
3		2485.300	15.60	32.21	47.80	-6.20	54.00	170	160	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

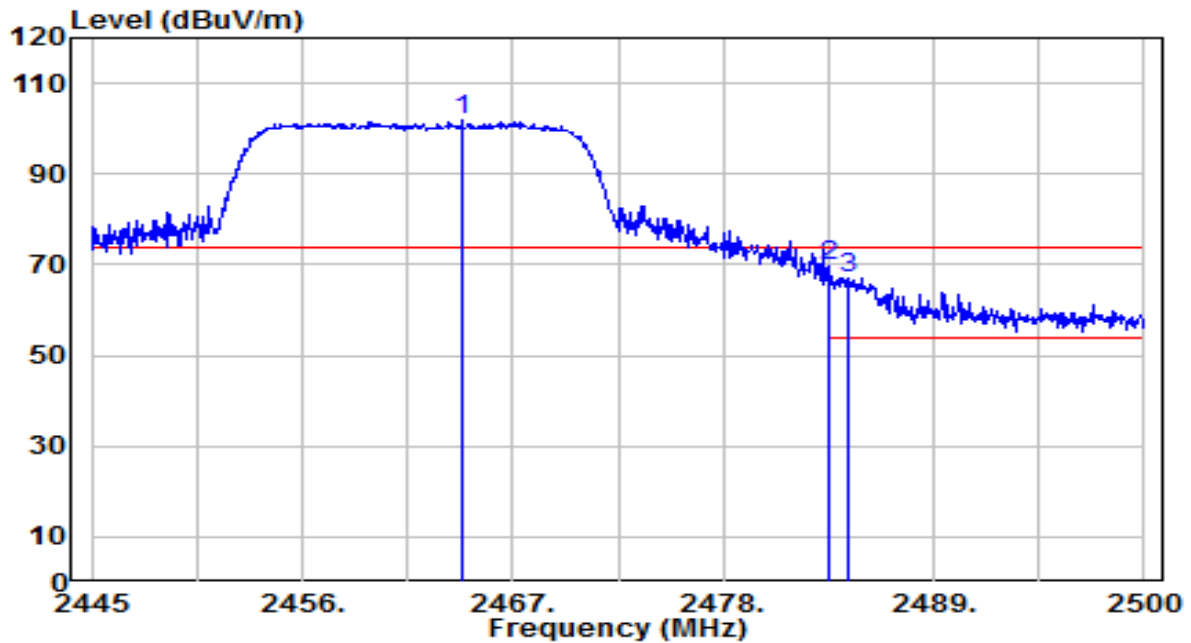


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2464.360	69.60	32.13	101.72	N/A	N/A	190	275	Peak
2	*	2483.500	37.60	32.20	69.79	-4.21	74.00	190	275	Peak
3		2484.545	34.92	32.20	67.12	-6.88	74.00	190	275	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

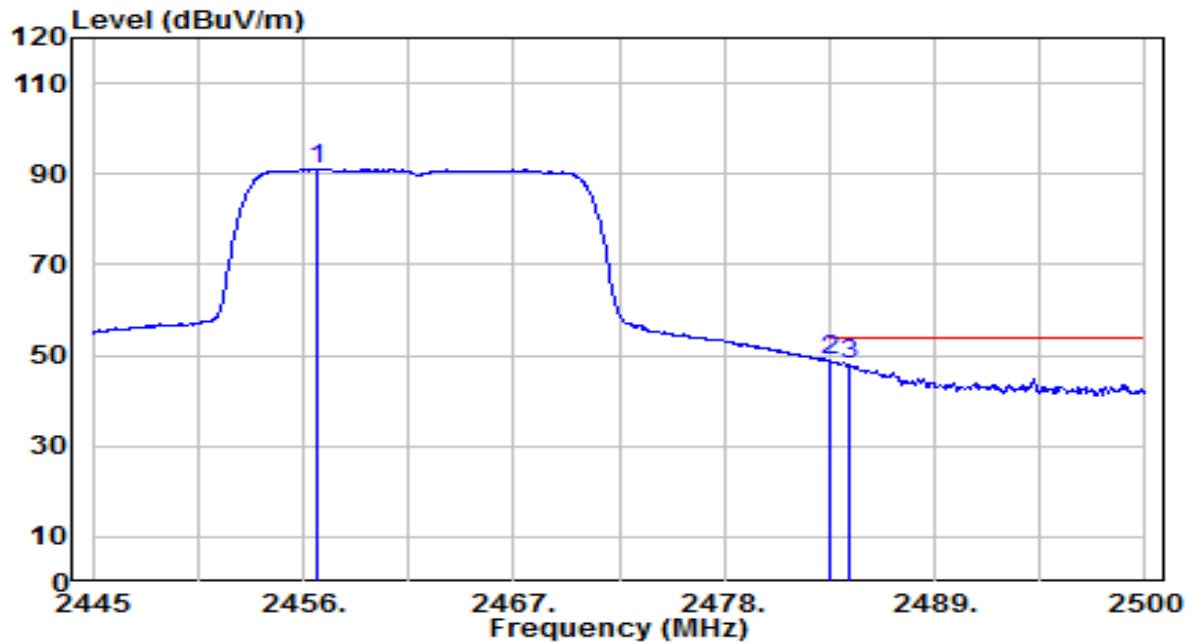


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.660	59.01	32.10	91.11	N/A	N/A	190	275	Average
2	*	2483.500	16.53	32.20	48.72	-5.28	54.00	190	275	Average
3		2484.545	15.73	32.20	47.94	-6.06	54.00	190	275	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

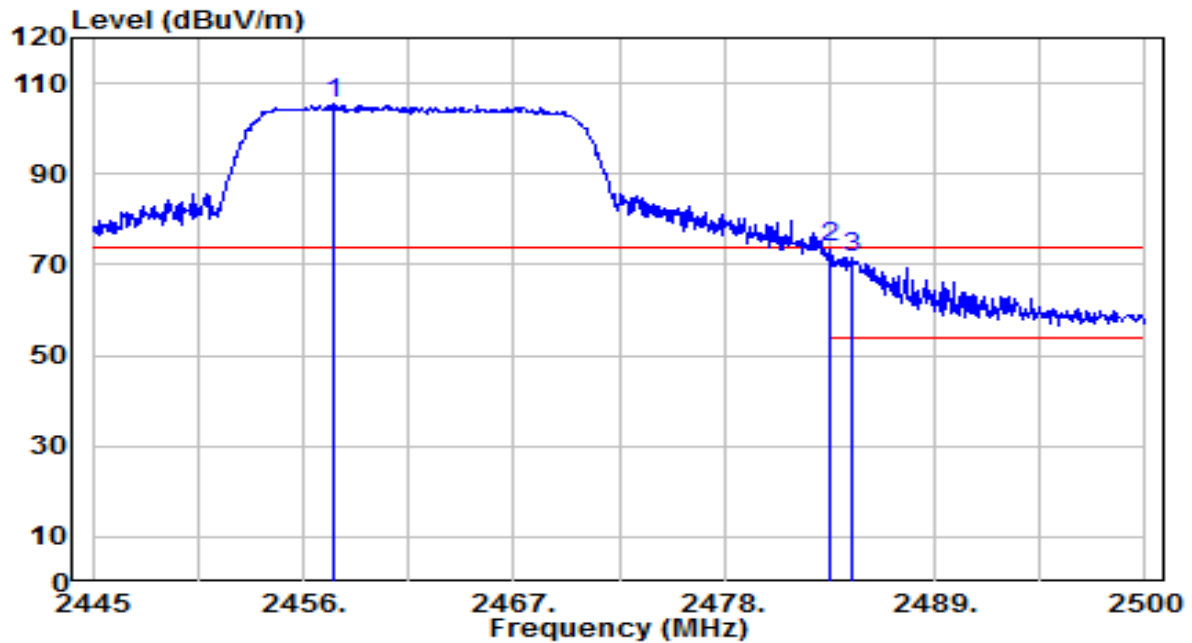


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2457.540	73.37	32.10	105.47	N/A	N/A	170	160	Peak
2	*	2483.500	41.53	32.20	73.73	-0.27	74.00	170	160	Peak
3		2484.710	39.32	32.20	71.52	-2.48	74.00	170	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-25
Factor	BBHA 9120D	Temp. / Humidity	24°C /52%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 0	Test Voltage	AC 120V/60Hz

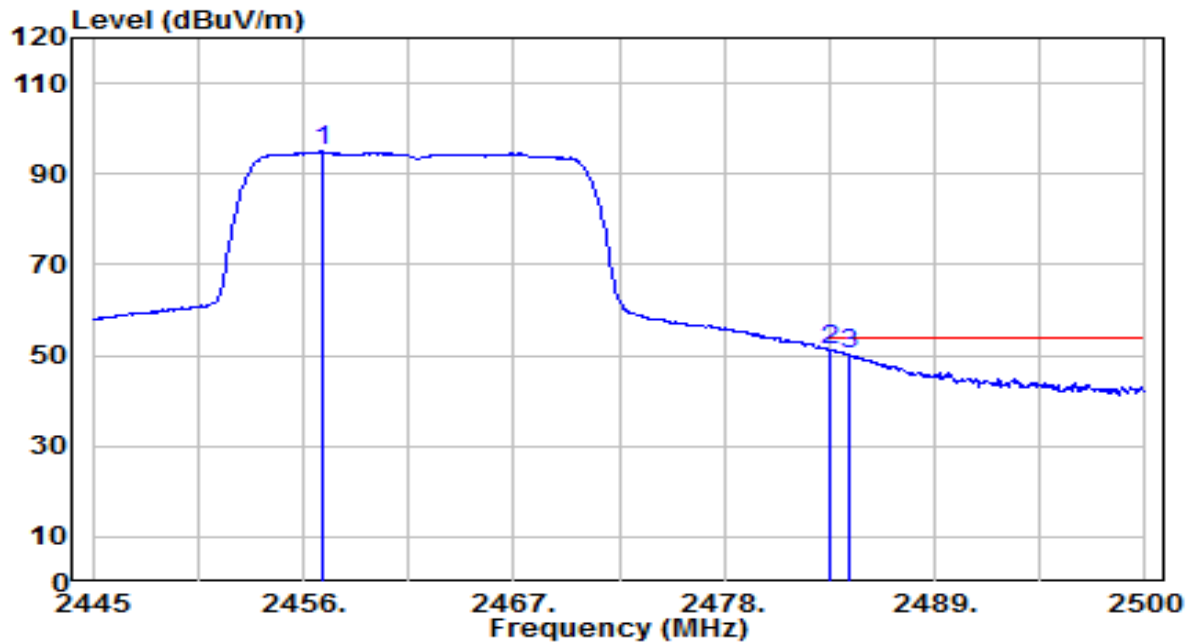


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2456.990	62.84	32.10	94.94	N/A	N/A	170	160	Average
2	*	2483.500	18.78	32.20	50.98	-3.02	54.00	170	160	Average
3		2484.545	18.15	32.20	50.35	-3.65	54.00	170	160	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

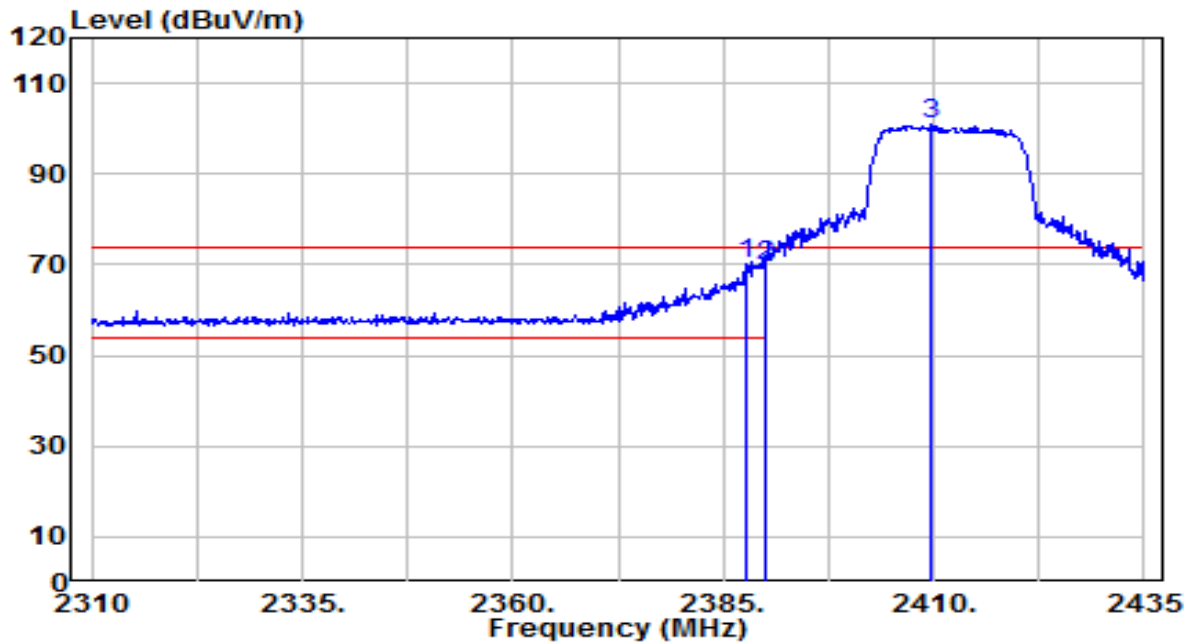


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.625	38.23	31.84	70.07	-3.93	74.00	280	35	Peak
2		2390.000	37.88	31.85	69.73	-4.27	74.00	280	35	Peak
3		2409.750	69.09	31.92	101.01	N/A	N/A	280	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

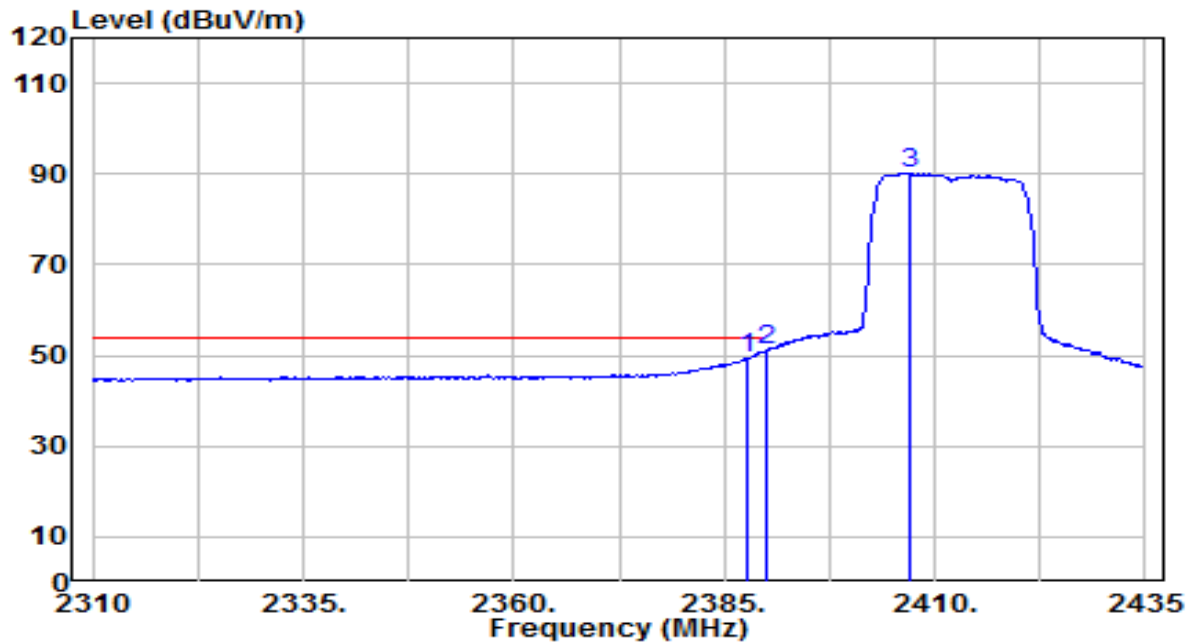


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.875	17.61	31.84	49.45	-4.55	54.00	280	35	Average
2	*	2390.000	19.14	31.85	50.98	-3.02	54.00	280	35	Average
3		2407.000	58.35	31.91	90.26	N/A	N/A	280	35	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

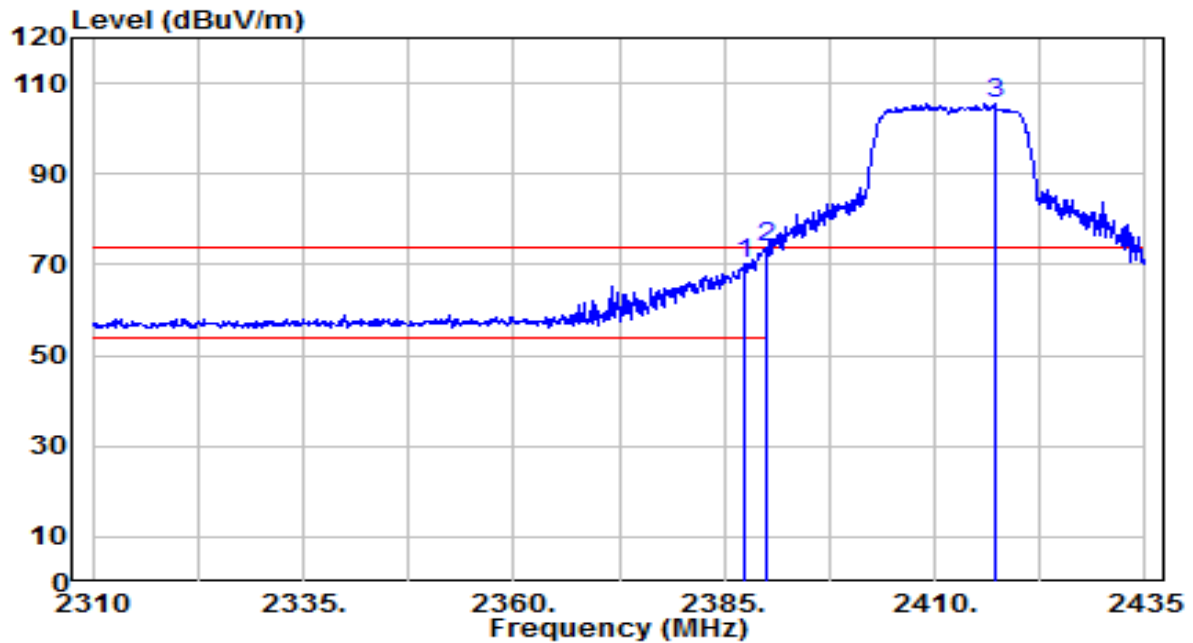


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.250	38.54	31.84	70.38	-3.62	74.00	155	315	Peak
2	*	2390.000	41.96	31.85	73.81	-0.19	74.00	155	315	Peak
3		2417.125	73.52	31.95	105.47	N/A	N/A	155	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 1_ANT 1	Test Voltage	AC 120V/60Hz

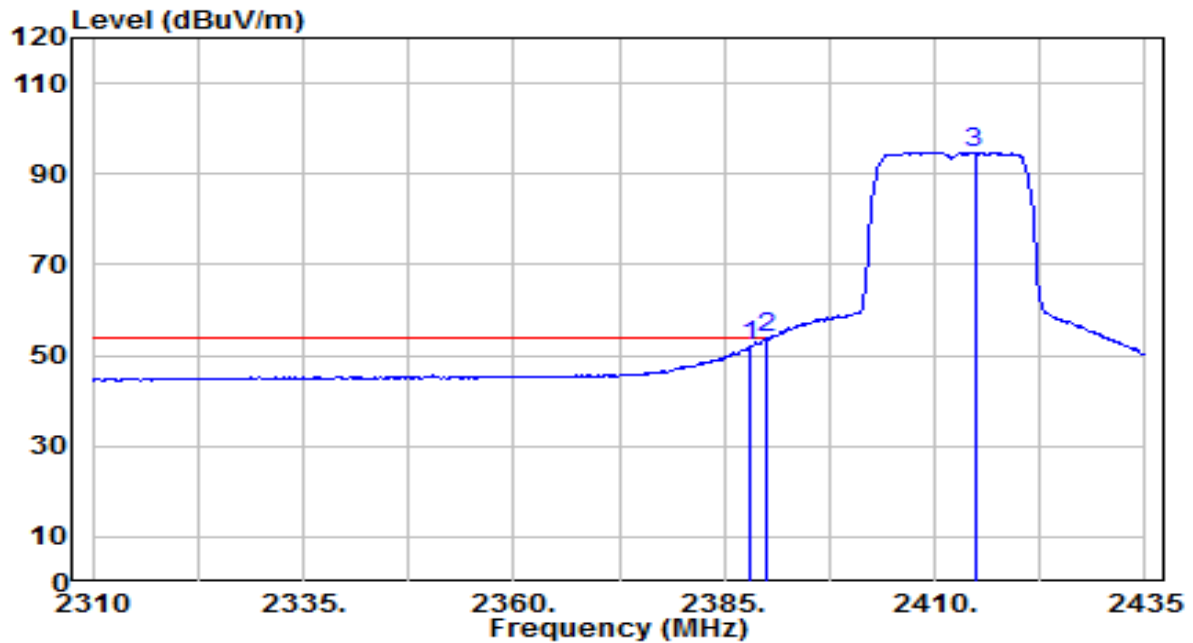


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	20.08	31.84	51.92	-2.08	54.00	155	315	Average
2	*	2390.000	21.93	31.85	53.78	-0.22	54.00	155	315	Average
3		2414.750	62.84	31.94	94.78	N/A	N/A	155	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 1	Test Voltage	AC 120V/60Hz

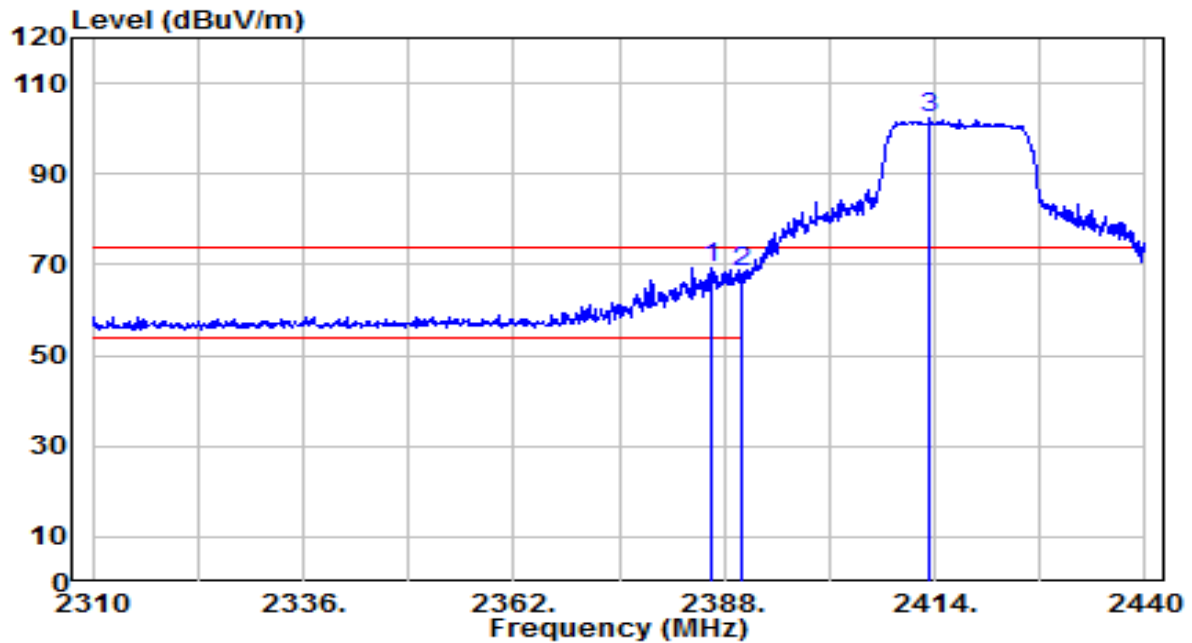


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.440	37.53	31.84	69.37	-4.63	74.00	280	35	Peak
2		2390.000	36.66	31.85	68.51	-5.49	74.00	280	35	Peak
3		2413.480	70.47	31.94	102.40	N/A	N/A	280	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 1	Test Voltage	AC 120V/60Hz

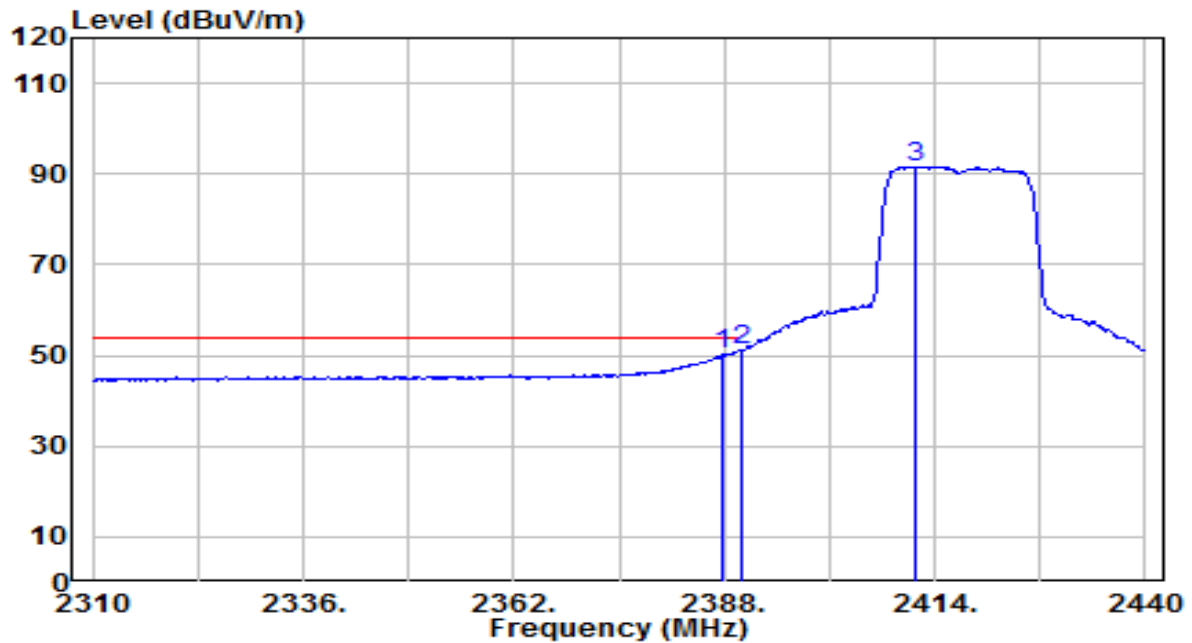


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2387.870	18.22	31.84	50.06	-3.94	54.00	280	35	Average
2	*	2390.000	19.34	31.85	51.19	-2.81	54.00	280	35	Average
3		2411.530	59.76	31.93	91.69	N/A	N/A	280	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 1	Test Voltage	AC 120V/60Hz

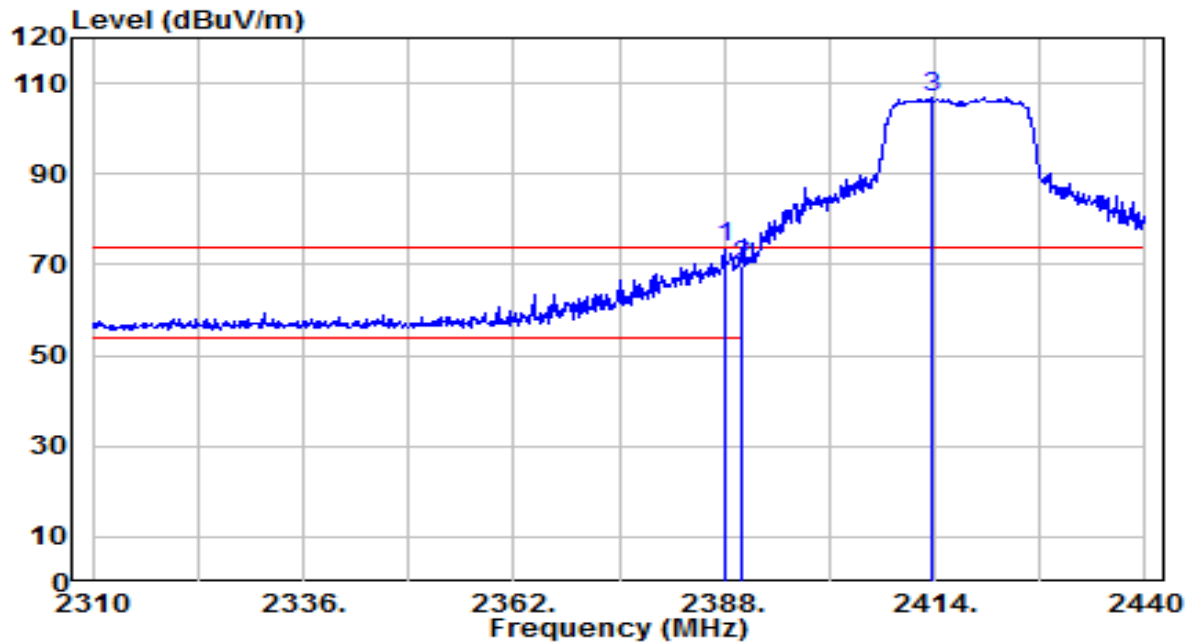


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2388.000	41.92	31.84	73.76	-0.24	74.00	155	315	Peak
2		2390.000	37.97	31.85	69.82	-4.18	74.00	155	315	Peak
3		2413.610	75.08	31.94	107.01	N/A	N/A	155	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 2_ANT 1	Test Voltage	AC 120V/60Hz

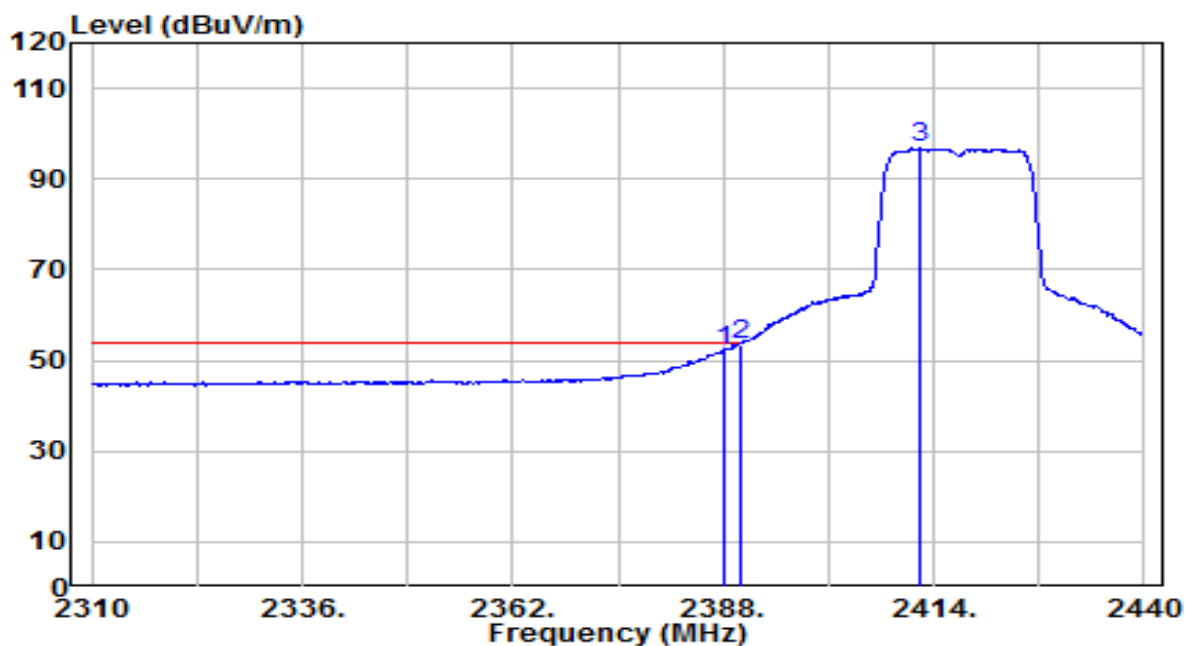


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2388.000	20.29	31.84	52.13	-1.87	54.00	155	315	Average
2	*	2390.000	21.62	31.85	53.46	-0.54	54.00	155	315	Average
3		2412.310	64.78	31.93	96.71	N/A	N/A	155	315	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

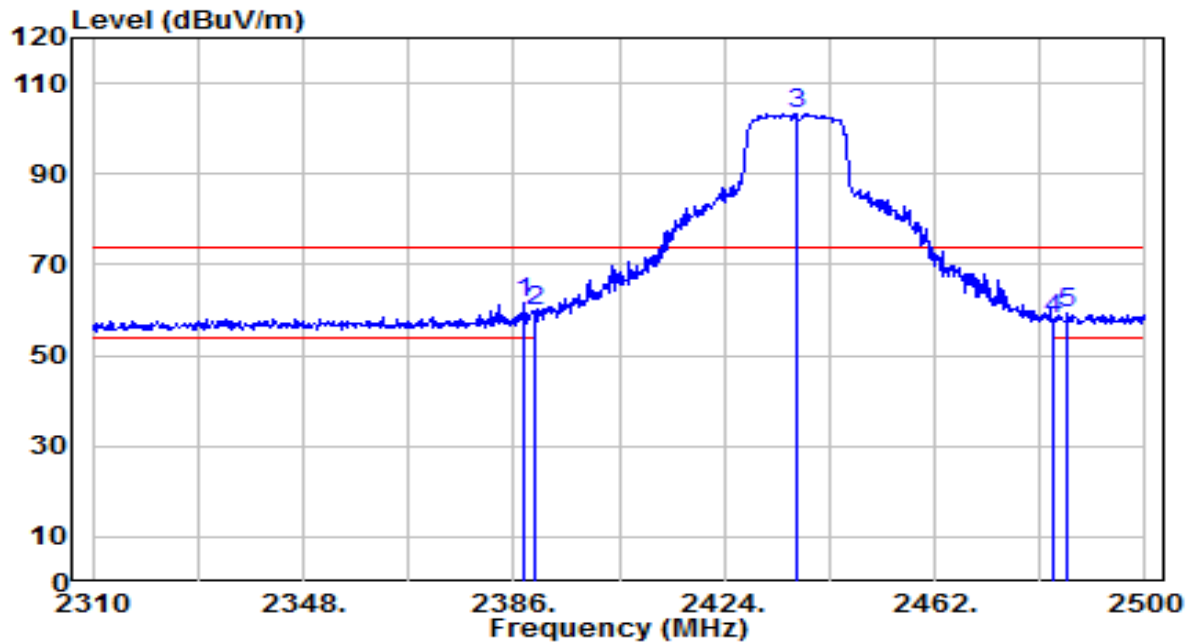


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2387.900	29.83	31.84	61.67	-12.33	74.00	200	35	Peak
2		2390.000	27.73	31.85	59.57	-14.43	74.00	200	35	Peak
3		2436.920	71.36	32.02	103.38	N/A	N/A	200	35	Peak
4		2483.500	25.69	32.20	57.89	-16.11	74.00	200	35	Peak
5		2486.130	27.10	32.21	59.31	-14.69	74.00	200	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

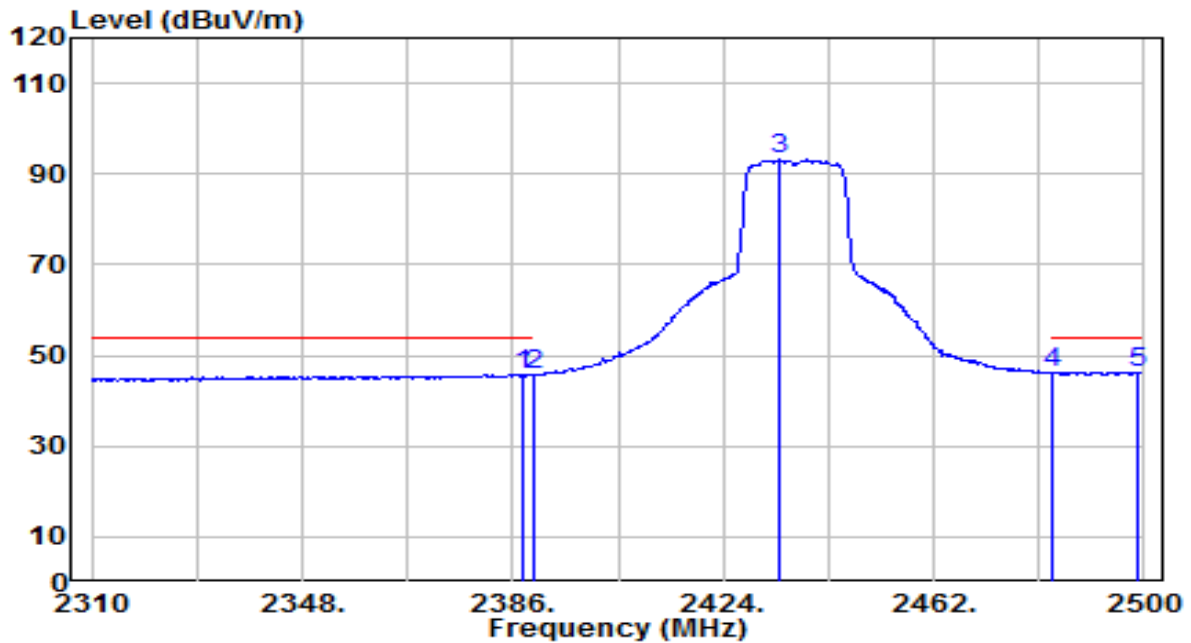


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.710	14.01	31.84	45.85	-8.15	54.00	200	35	Average
2	2390.000	14.04	31.85	45.88	-8.12	54.00	200	35	Average
3	2434.070	61.06	32.01	93.07	N/A	N/A	200	35	Average
4	2483.500	13.80	32.20	46.00	-8.00	54.00	200	35	Average
5	* 2499.050	14.13	32.26	46.38	-7.62	54.00	200	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

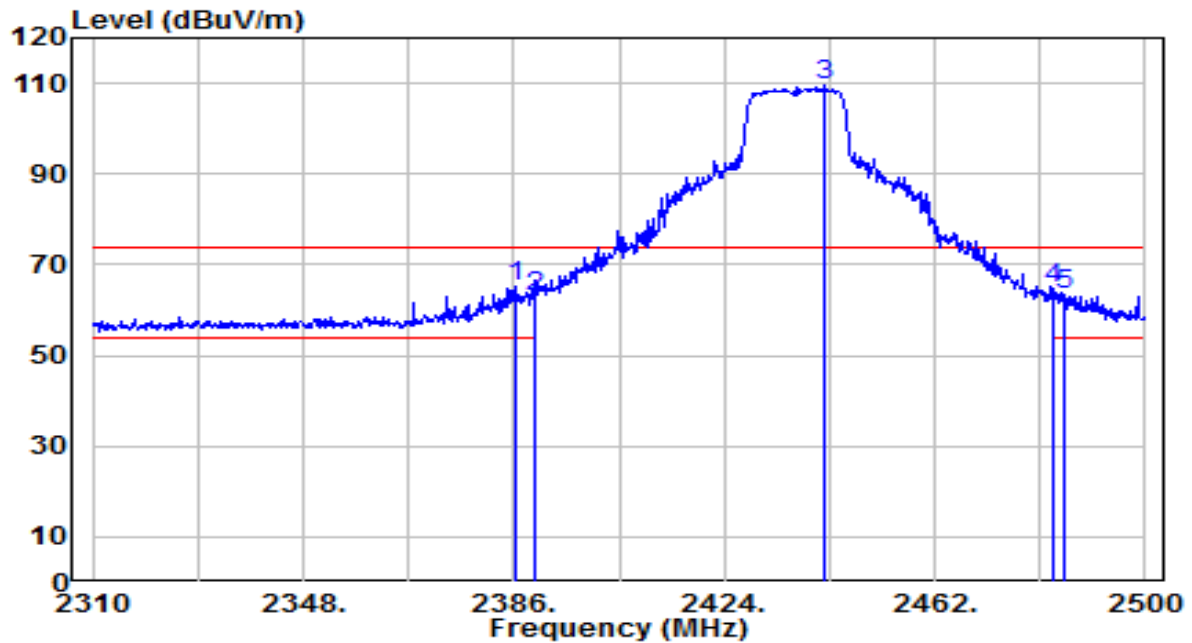


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	2386.190	33.44	31.83	65.27	-8.73	74.00	150	315	Peak
2		2390.000	31.17	31.85	63.02	-10.98	74.00	150	315	Peak
3		2442.240	77.33	32.04	109.38	N/A	N/A	150	315	Peak
4		2483.500	32.51	32.20	64.70	-9.30	74.00	150	315	Peak
5		2485.560	31.28	32.21	63.49	-10.51	74.00	150	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 6_ANT 1	Test Voltage	AC 120V/60Hz

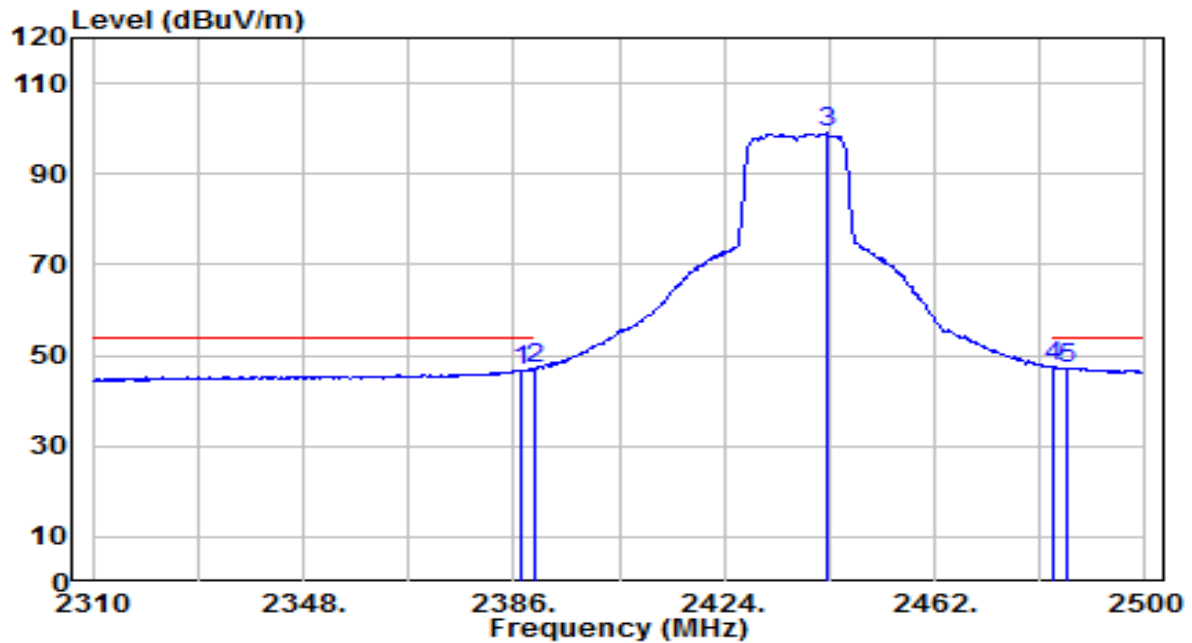


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.330	14.75	31.84	46.59	-7.41	54.00	150	315	Average
2	2390.000	15.40	31.85	47.25	-6.75	54.00	150	315	Average
3	2442.430	66.96	32.04	99.01	N/A	N/A	150	315	Average
4	* 2483.500	15.22	32.20	47.42	-6.58	54.00	150	315	Average
5	2486.130	15.08	32.21	47.29	-6.71	54.00	150	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 1	Test Voltage	AC 120V/60Hz

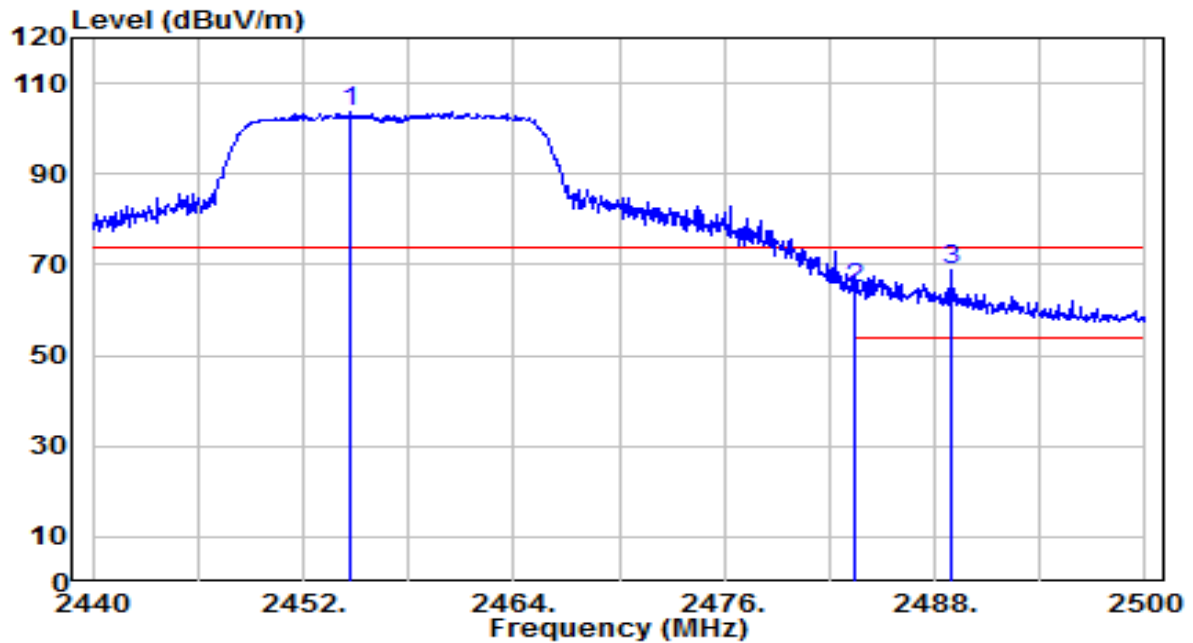


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.640	71.48	32.09	103.57	N/A	N/A	300	35	Peak
2	2483.500	32.66	32.20	64.86	-9.14	74.00	300	35	Peak
3	* 2488.900	36.57	32.22	68.79	-5.21	74.00	300	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 1	Test Voltage	AC 120V/60Hz

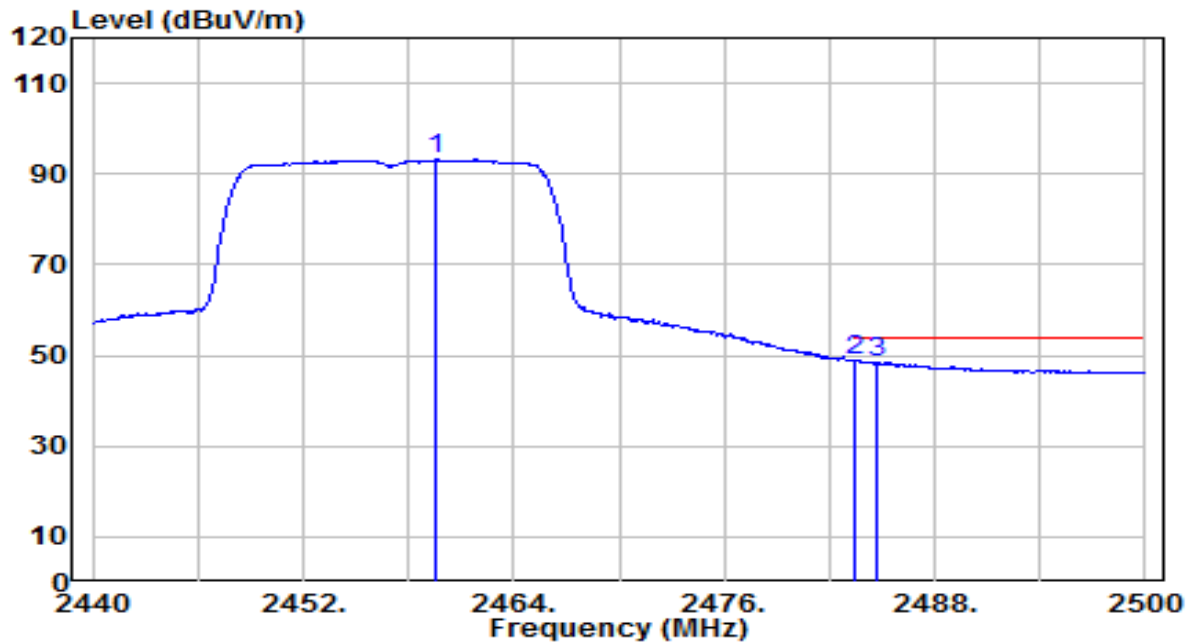


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.560	61.11	32.11	93.21	N/A	N/A	300	35	Average
2	*	2483.500	16.83	32.20	49.03	-4.97	54.00	300	35	Average
3		2484.640	16.23	32.20	48.43	-5.57	54.00	300	35	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 1	Test Voltage	AC 120V/60Hz

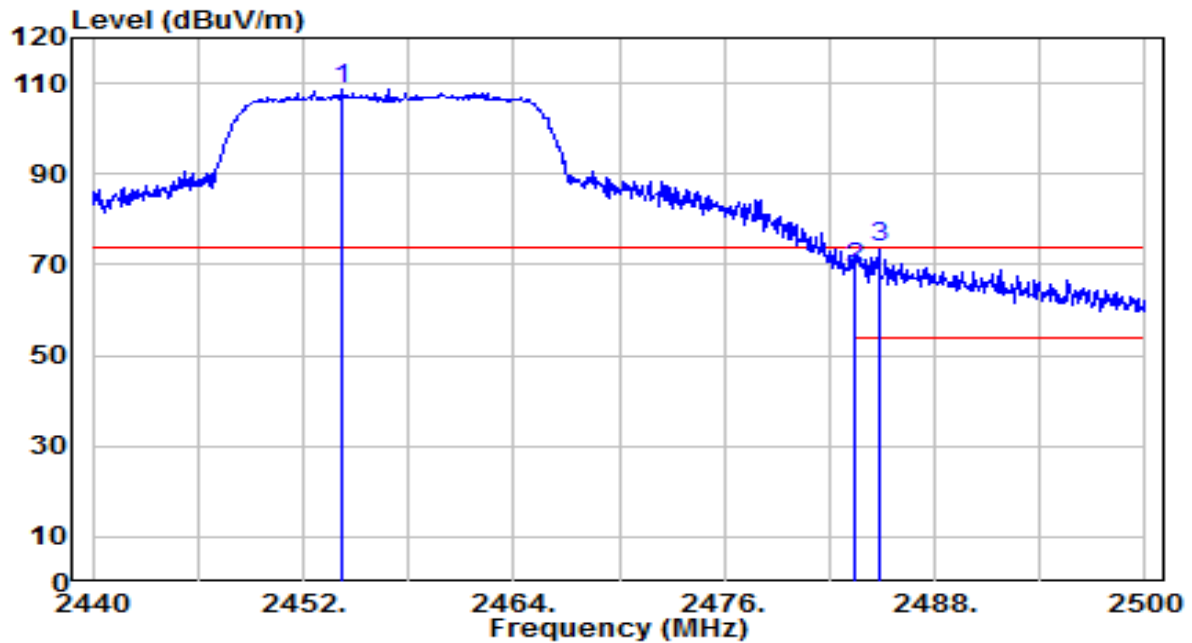


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.220	76.63	32.09	108.72	N/A	N/A	145	315	Peak
2	2483.500	36.97	32.20	69.17	-4.83	74.00	145	315	Peak
3	* 2484.820	41.54	32.20	73.75	-0.25	74.00	145	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 10_ANT 1	Test Voltage	AC 120V/60Hz

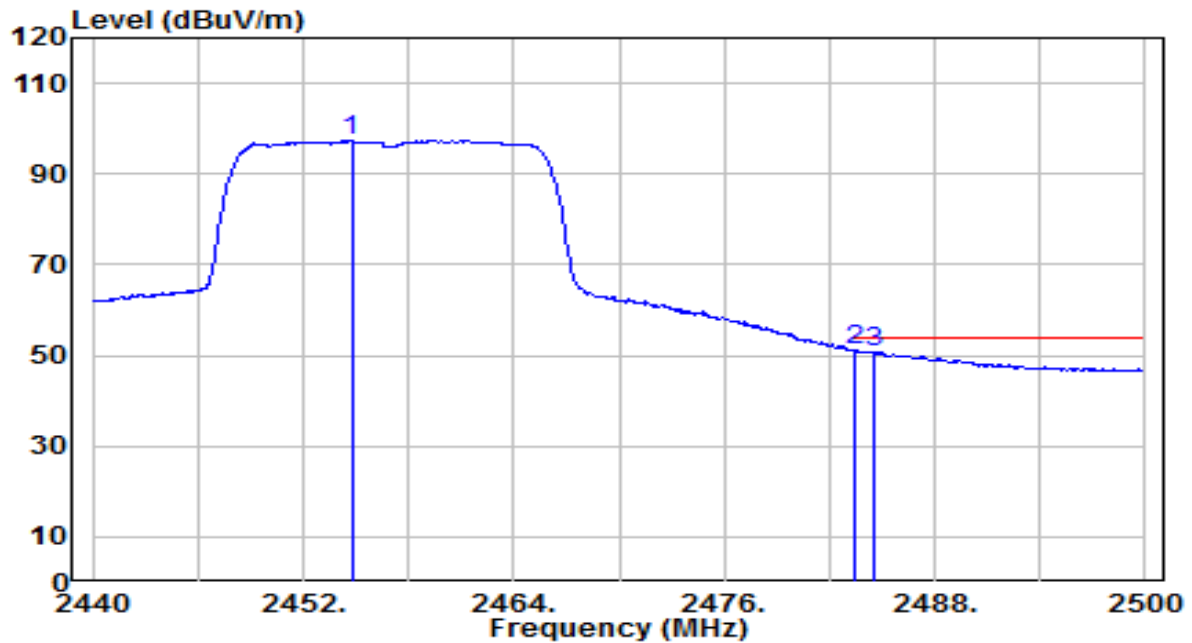


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2454.760	65.41	32.09	97.50	N/A	N/A	145	315	Average
2	*	2483.500	18.89	32.20	51.09	-2.91	54.00	145	315	Average
3		2484.520	18.41	32.20	50.62	-3.38	54.00	145	315	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

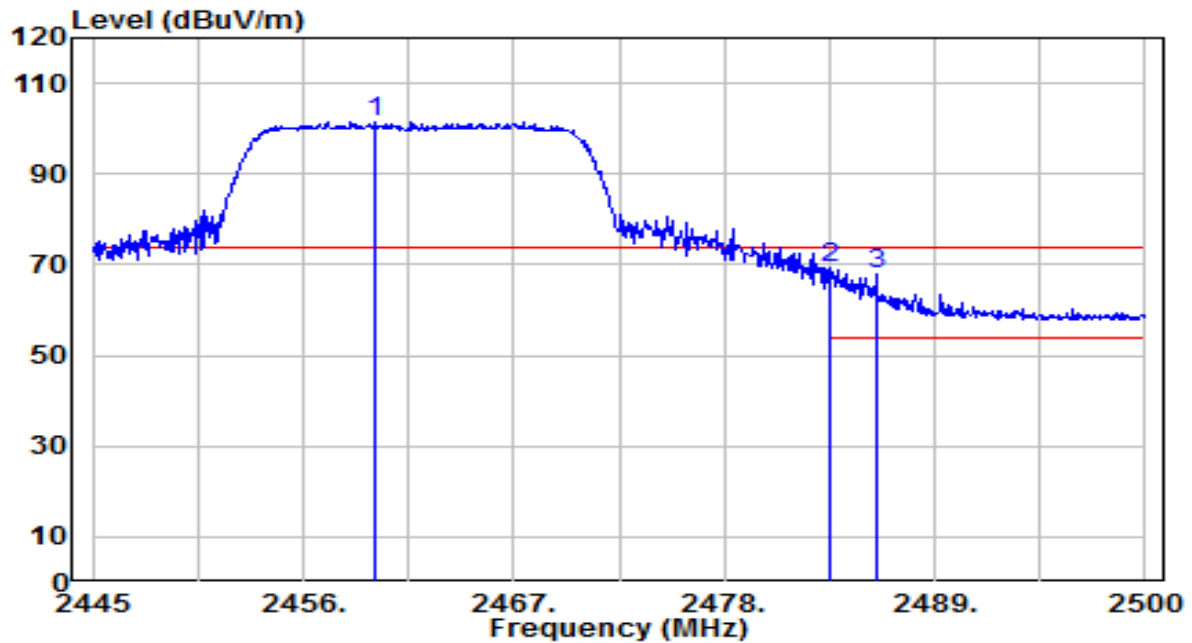


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2459.795	69.47	32.11	101.58	N/A	N/A	300	35	Peak
2	*	2483.500	37.19	32.20	69.39	-4.61	74.00	300	35	Peak
3		2485.975	35.77	32.21	67.98	-6.02	74.00	300	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

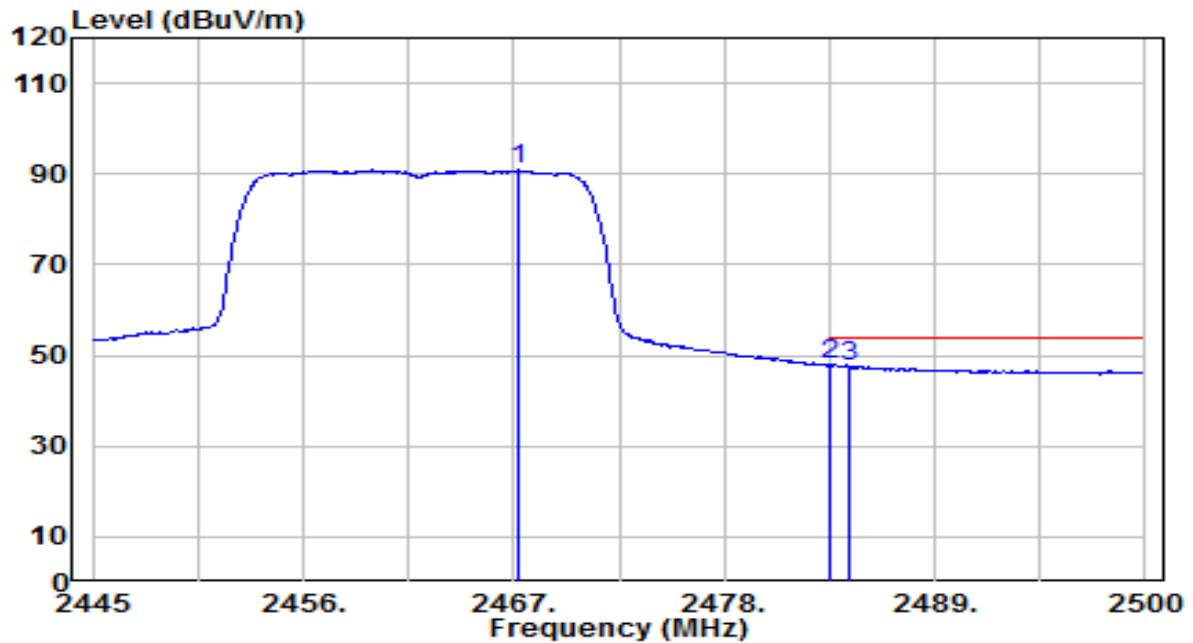


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2467.220	58.67	32.14	90.81	N/A	N/A	300	35	Average
2	*	2483.500	15.59	32.20	47.78	-6.22	54.00	300	35	Average
3		2484.600	15.35	32.20	47.55	-6.45	54.00	300	35	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

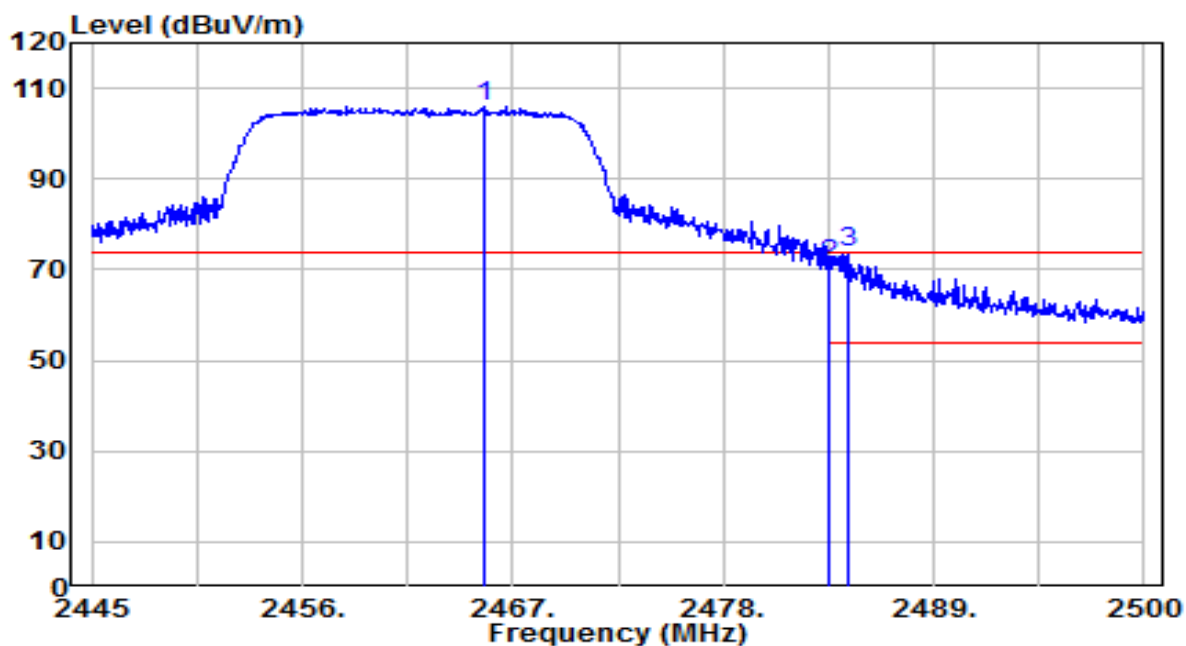


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2465.570	73.89	32.13	106.02	N/A	N/A	145	315	Peak
2	2483.500	38.74	32.20	70.94	-3.06	74.00	145	315	Peak
3	* 2484.545	41.57	32.20	73.78	-0.22	74.00	145	315	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-04-12
Factor	BBHA 9120D	Temp. / Humidity	25°C /63%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	802.11n-20MHz_TX_CH 11_ANT 1	Test Voltage	AC 120V/60Hz

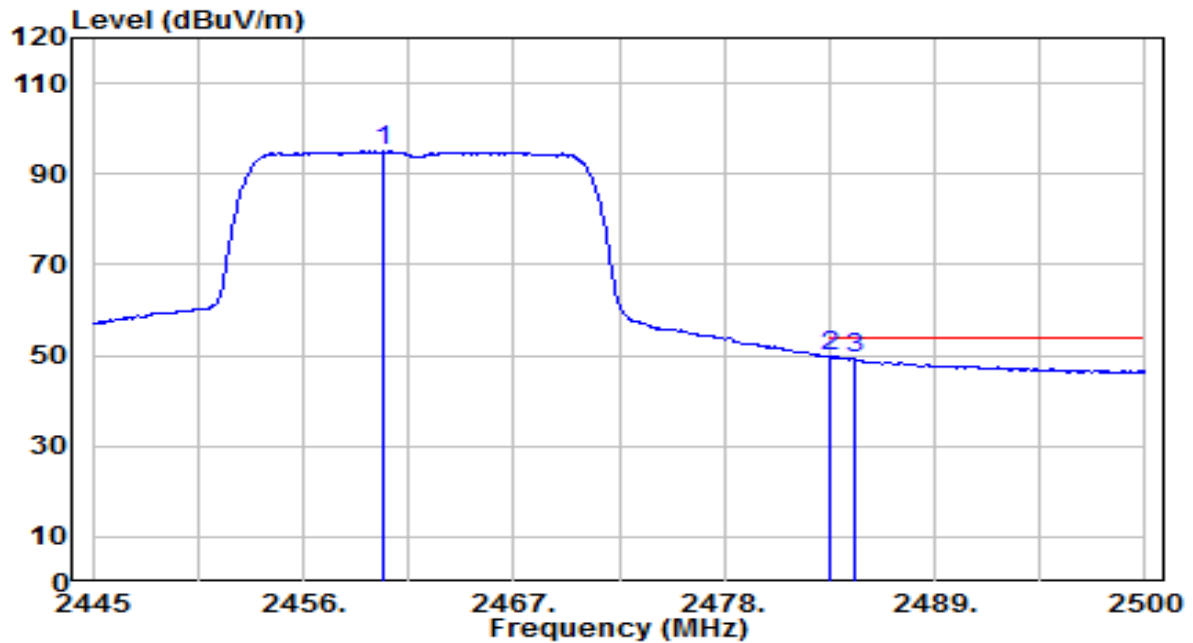

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		2460.235	62.90	32.11	95.01	N/A	N/A	145	315	Average
2	*	2483.500	17.56	32.20	49.76	-4.24	54.00	145	315	Average
3		2484.765	17.20	32.20	49.40	-4.60	54.00	145	315	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

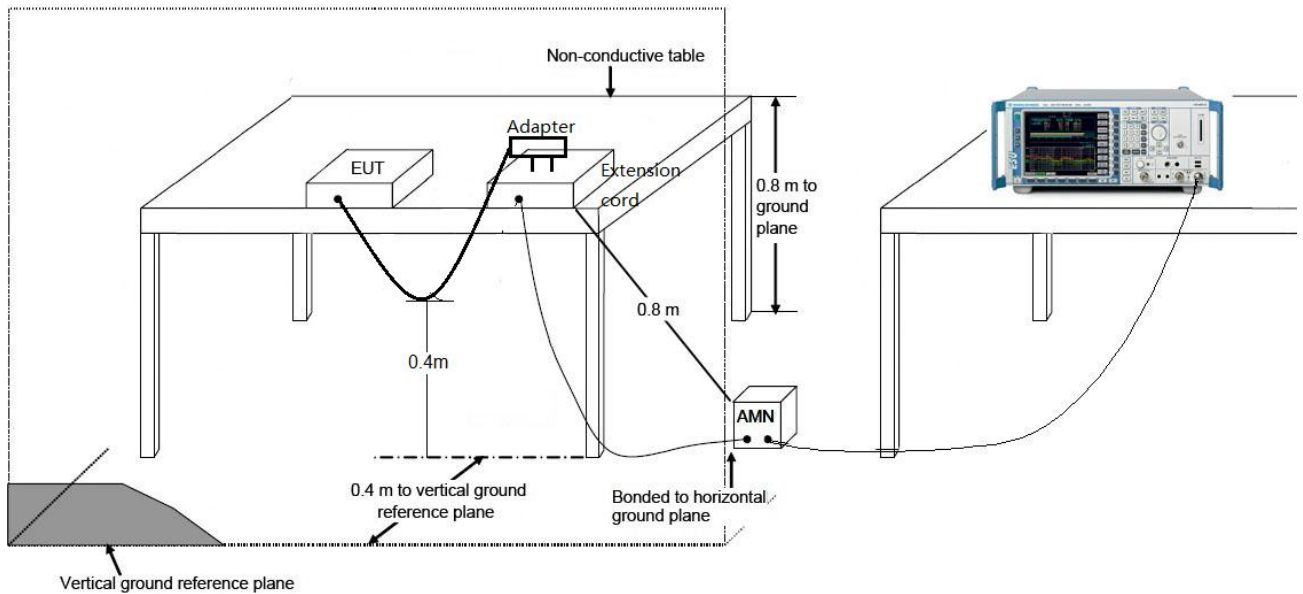

7.8.3.Test Result

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-31
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.8°C /55%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0	Test Voltage	AC 120V/60Hz

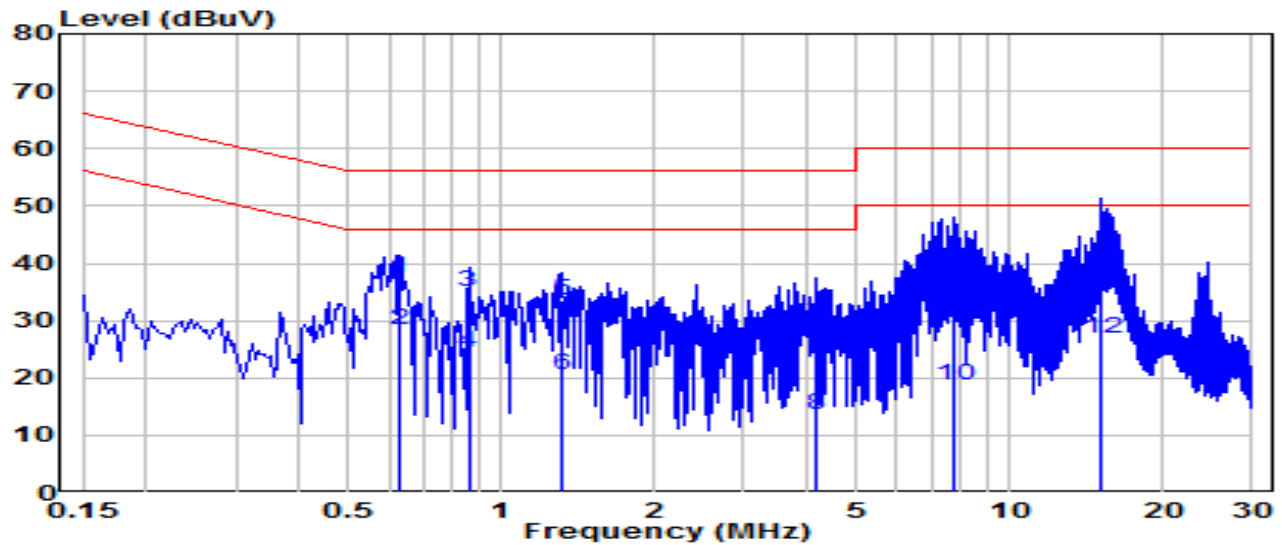


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.631	27.68	9.65	37.33	-18.67	56.00	QP
2	*	0.631	18.66	9.65	28.31	-17.69	46.00	Average
3		0.861	25.25	9.66	34.91	-21.09	56.00	QP
4		0.861	14.89	9.66	24.55	-21.45	46.00	Average
5		1.306	23.84	9.68	33.52	-22.48	56.00	QP
6		1.306	10.86	9.68	20.54	-25.46	46.00	Average
7		4.155	19.60	9.73	29.33	-26.67	56.00	QP
8		4.155	3.91	9.73	13.64	-32.36	46.00	Average
9		7.781	25.47	9.82	35.28	-24.72	60.00	QP
10		7.781	8.92	9.82	18.73	-31.27	50.00	Average
11		15.102	27.27	9.90	37.17	-22.83	60.00	QP
12		15.102	17.06	9.90	26.96	-23.04	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Indoor/Outdoor Dual Lens Pan/Tilt Security Camera	Date of Test	2025-03-31
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.8°C /55%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11n-20MHz_TX_CH6_Ant 0	Test Voltage	AC 120V/60Hz

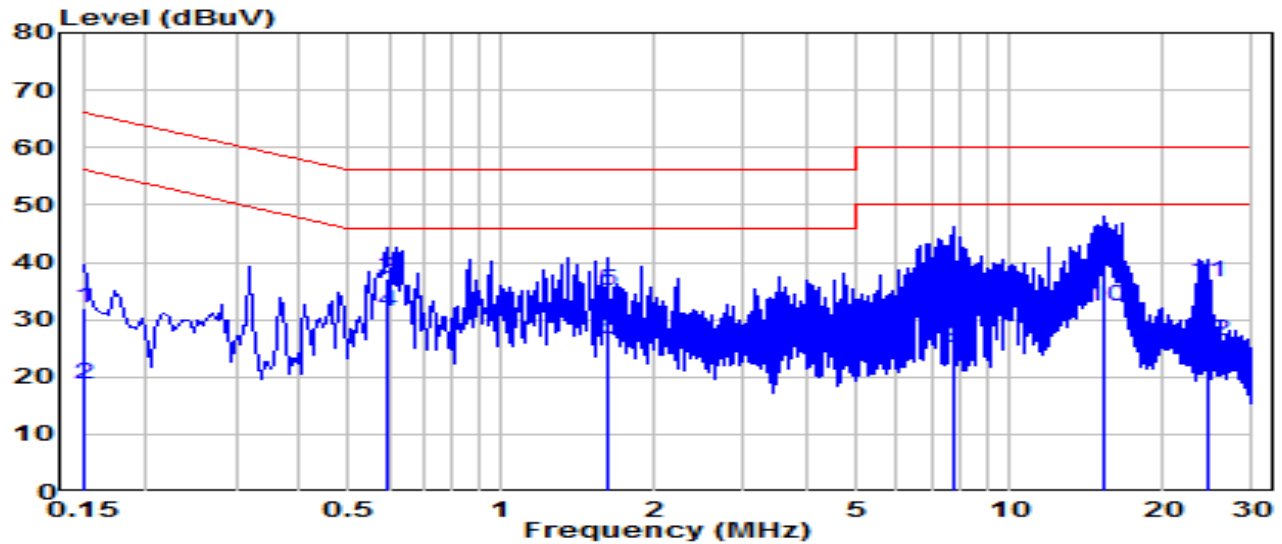

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	22.33	9.63	31.96	-34.04	66.00	QP
2	0.150	9.14	9.63	18.77	-37.23	56.00	Average
3	* 0.595	27.35	9.65	37.00	-19.00	56.00	QP
4	* 0.595	21.66	9.65	31.31	-14.69	46.00	Average
5	1.617	25.33	9.69	35.02	-20.98	56.00	QP
6	1.617	16.78	9.69	26.47	-19.53	46.00	Average
7	7.790	25.33	9.82	35.15	-24.85	60.00	QP
8	7.790	15.19	9.82	25.01	-24.99	50.00	Average
9	15.327	31.23	9.92	41.16	-18.84	60.00	QP
10	15.327	22.36	9.92	32.28	-17.72	50.00	Average
11	24.479	26.61	9.99	36.60	-23.40	60.00	QP
12	24.479	16.19	9.99	26.18	-23.82	50.00	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2503TW0108-UT” file.

Appendix B : External Photograph

Refer to “2503TW0108-UE” file.

Appendix C : Internal Photograph

Refer to “2503TW0108-UI” file.

_____ The End _____